亚马逊云科技

User Guide for Aurora

Amazon Aurora



Amazon Aurora: User Guide for Aurora

Table of Contents

What is Aurora? 1
Amazon RDS shared responsibility model 2
How Amazon Aurora works with Amazon RDS 2
Aurora DB clusters 4
Aurora versions 6
Supported database engines 6
Specifying an Aurora version 7
Aurora versioning 7
Aurora DB cluster upgrades 13
Aurora version support 16
Regions and Availability Zones 18
Amazon Regions 19
Availability Zones 20
Local time zone for DB clusters 21
Supported Aurora features by Region and engine 28
Table conventions 29
Blue/Green Deployments 29
Aurora cluster configurations 30
Database activity streams 30
Exporting cluster data to Amazon S3 41
Exporting snapshot data to Amazon S3 43
Aurora global databases 43
IAM database authentication 57
Kerberos authentication 58
Aurora machine learning 70
Database Insights 81
Zero-ETL integrations 92
RDS Proxy 99
Secrets Manager integration 114
Aurora serverless 114
RDS Data API 121
Zero-downtime patching (ZDP) 128
Engine-native features 129
Endpoint connections 129

Types of Aurora endpoints ... 130
Viewing endpoints ... 132
Endpoints and high availability ... 132
Cluster endpoints ... 133
Reader endpoints ... 134
Instance endpoints ... 135
Custom endpoints ... 136
DB instance classes ... 155
DB instance class types ... 155
Supported DB engines ... 159
Determining DB instance class support in Amazon Web Services Regions ... 173
Hardware specifications ... 177
Storage ... 191
Overview of Aurora storage ... 192
Cluster volume contents ... 192
Aurora cluster storage configurations ... 192
How storage resizes ... 193
Data billing ... 194
Reliability ... 195
Storage auto-repair ... 195
Survivable page cache ... 196
Recovery from unplanned restarts ... 196
Aurora security ... 197
Using SSL with Aurora DB clusters ... 199
High availability ... 199
High availability for Aurora data ... 199
High availability for Aurora DB instances ... 200
High availability across Amazon Regions with Aurora global databases ... 201
Fault tolerance ... 201
High availability with Amazon RDS Proxy ... 203
Replication ... 203
Aurora Replicas ... 203
Aurora MySQL ... 206
Aurora PostgreSQL ... 206
DB instance billing for Aurora ... 207
On-Demand DB instances ... 209

Reserved DB instances ... 211
Aurora on the Amazon Free Tier ... 225
Setting up your environment ... 227
Sign up for an Amazon Web Services account ... 227
Secure IAM users ... 227
Determine requirements ... 228
Provide access to the DB cluster ... 230
Getting started ... 233
Creating and connecting to an Aurora MySQL DB cluster ... 233
Prerequisites ... 235
Step 1: Create an EC2 instance ... 235
Step 2: Create an Aurora MySQL DB cluster ... 241
(Optional) Create VPC, EC2 instance, and Aurora MySQL cluster using Amazon CloudFormation ... 246
Step 3: Connect to an Aurora MySQL DB cluster ... 248
Step 4: Delete the EC2 instance and DB cluster ... 251
(Optional) Delete the EC2 instance and DB cluster created with CloudFormation ... 252
(Optional) Connect your DB cluster to a Lambda function ... 252
Creating and connecting to an Aurora PostgreSQL DB cluster ... 253
Create with full configuration ... 253
Create with express configuration ... 272
Tutorial: Create a web server and an Amazon Aurora DB cluster ... 294
Launch an EC2 instance to connect with your DB cluster ... 295
Create a DB cluster ... 301
Install a web server ... 312
Tutorials and sample code ... 325
Tutorials in this guide ... 325
Tutorials in other Amazon guides ... 326
Tutorials and sample code in GitHub ... 327
Amazon Database Cookbook ... 328
Amazon workshop - Amazon Aurora PostgreSQL ... 329
Amazon workshop - Amazon Aurora MySQL ... 330
Working with Amazon SDKs ... 331
Programmatic access to Amazon Aurora ... 333
Console-to-Code ... 334
Setting up an Aurora DB cluster ... 335

Creating a DB cluster ... 336
Prerequisites ... 337
Creating a DB cluster ... 343
Available settings ... 353
Settings that don't apply to Aurora for DB clusters ... 374
Settings that don't apply to Aurora DB instances ... 375
Creating resources with Amazon CloudFormation ... 378
Aurora and Amazon CloudFormation templates ... 378
Learn more about Amazon CloudFormation ... 378
Connecting to a DB cluster ... 379
Connecting to Aurora DB clusters with the Amazon drivers ... 380
Connecting to Aurora MySQL ... 383
Connecting to Aurora PostgreSQL ... 391
Troubleshooting connections ... 393
Parameter groups ... 395
Overview of parameter groups ... 395
DB cluster parameter groups ... 399
DB parameter groups ... 417
Comparing DB parameter groups ... 433
Specifying DB parameters ... 434
Migrating data to a DB cluster ... 439
Aurora MySQL ... 439
Aurora PostgreSQL ... 439
Creating an ElastiCache cache from Amazon RDS ... 440
Overview of ElastiCache cache creation with Aurora DB cluster settings ... 440
Creating an ElastiCache cache with settings from an Aurora DB cluster ... 441
Auto-migrating databases ... 444
Overview ... 444
Prerequisites ... 445
Limitations ... 446
Creating IAM resources ... 447
Set up data migration ... 455
Managing migrations ... 457
Monitoring ... 459
Tutorial: Creating a MySQL DB cluster with a custom parameter group ... 461
Prerequisites ... 462

Create a custom parameter group ... 462
Modify parameter value ... 462
Create your DB DB cluster ... 463
Managing an Aurora DB cluster ... 465
Stopping and starting a cluster ... 466
Overview of stopping and starting a cluster ... 466
Limitations ... 467
Stopping a DB cluster ... 468
While a DB cluster is stopped ... 469
Starting a DB cluster ... 469
Connecting an EC2 instance ... 471
Overview ... 472
Connecting an EC2 instance ... 477
Viewing connected compute resources ... 480
Connecting to a DB instance running a specific DB engine ... 481
Connecting a Lambda function ... 482
Overview ... 484
Connecting a Lambda function ... 495
Viewing connected compute resources ... 497
Modifying an Aurora DB cluster ... 498
Modifying the DB cluster by using the console, CLI, and API ... 498
Modifying a DB instance in a DB cluster ... 500
Changing the master user password ... 503
Available settings ... 505
Settings that don't apply to Aurora DB clusters ... 540
Settings that don't apply to Aurora DB instances ... 541
Adding Aurora Replicas ... 543
Auto Scaling with Aurora Replicas ... 550
Adding an auto scaling policy ... 556
Editing an auto scaling policy ... 568
Deleting an auto scaling policy ... 570
Managing performance and scaling ... 573
Storage scaling ... 573
Instance scaling ... 580
Read scaling ... 580
Managing connections ... 580

Managing query execution plans ... 581
Cloning a volume for an Aurora DB cluster ... 582
Overview of Aurora cloning ... 582
Limitations of Aurora cloning ... 583
How Aurora cloning works ... 584
Creating an Aurora clone ... 587
Cross-VPC cloning ... 595
Cross-account cloning ... 613
Integrating with Amazon services ... 631
Aurora MySQL ... 631
Aurora PostgreSQL ... 631
Maintaining an Aurora DB cluster ... 633
Overview of DB cluster maintenance updates ... 633
Viewing pending maintenance ... 634
Choosing the frequency of Aurora MySQL maintenance updates ... 637
Maintenance window ... 638
Applying updates ... 644
Automatic minor version upgrades for Aurora DB clusters ... 646
Operating system updates ... 651
Amazon Organizations upgrade rollout ... 659
Rebooting an Aurora DB cluster or instance ... 663
Rebooting a DB instance within an Aurora cluster ... 664
Rebooting an Aurora cluster with read availability ... 665
Rebooting an Aurora cluster without read availability ... 667
Checking uptime for Aurora clusters and instances ... 668
Examples of Aurora reboot operations ... 671
Failing over an Aurora DB cluster ... 687
Deleting Aurora clusters and instances ... 689
Deleting an Aurora DB cluster ... 689
Deletion protection for Aurora clusters ... 697
Deleting a stopped Aurora cluster ... 698
Deleting Aurora MySQL clusters that are read replicas ... 698
The final snapshot when deleting a cluster ... 698
Deleting a DB instance from an Aurora DB cluster ... 698
Tagging Aurora and RDS resources ... 701
Why use RDS tags? ... 702

How RDS tags work ... 703
Best practices ... 706
Copying tags to DB cluster snapshots ... 707
Tagging automated backups ... 707
Adding and deleting tags in Amazon RDS ... 708
Tutorial: Use tags to specify which Aurora DB clusters to stop ... 712
ARNs in Amazon RDS ... 716
Constructing an ARN ... 716
Getting an existing ARN ... 719
Aurora updates ... 723
Identifying your Amazon Aurora version ... 723
RDS Extended Support ... 725
RDS Extended Support overview ... 726
RDS Extended Support charges ... 727
Avoiding charges for RDS Extended Support ... 728
Versions with RDS Extended Support ... 728
Responsibilities with RDS Extended Support ... 729
Amazon Aurora responsibilities ... 729
Your responsibilities ... 729
Creating an Aurora DB cluster or a global cluster ... 730
RDS Extended Support behavior ... 730
Considerations for RDS Extended Support ... 731
Create an Aurora DB cluster or a global cluster with RDS Extended Support ... 731
Viewing RDS Extended Support enrollment ... 733
Viewing support dates ... 736
Restoring an Aurora DB cluster or a global cluster ... 738
RDS Extended Support behavior ... 738
Considerations for RDS Extended Support ... 739
Restore an Aurora DB cluster DB cluster or a global cluster with RDS Extended Support ... 740
Using Blue/Green Deployments for database updates ... 742
Overview of Blue/Green Deployments ... 743
Region and version availability ... 744
Benefits ... 744
Workflow ... 744
Authorizing access ... 751
Limitations and considerations ... 752

Best practices ... 763
Creating a blue/green deployment ... 767
Preparing for a blue/green deployment ... 767
Specifying changes ... 770
Creating a blue/green deployment ... 770
Available settings ... 773
Viewing a blue/green deployment ... 774
Switching a blue/green deployment ... 778
Switchover timeout ... 779
Switchover guardrails ... 779
Switchover actions ... 780
Switchover when using Amazon RDS Proxy ... 781
Switchover best practices ... 782
Verifying CloudWatch metrics before switchover ... 783
Monitoring replica lag prior to switchover ... 784
Switching over a blue/green deployment ... 785
After switchover ... 787
Deleting a blue/green deployment ... 788
Backing up and restoring an Aurora DB cluster ... 792
Overview of backing up and restoring ... 793
Backups ... 793
Backup window ... 794
Restoring data ... 797
Database cloning ... 798
Backtrack ... 798
Retaining automated backups ... 799
Retention period ... 799
Retention costs ... 800
Prevent automated backup deletion ... 800
Limitations ... 800
Viewing retained automated backups ... 801
Deleting retained automated backups ... 801
Backup storage ... 804
Automated backup storage ... 804
Snapshot storage ... 804
CloudWatch metrics for backup storage ... 805

Calculating backup storage usage ... 806
FAQs ... 807
Creating a DB cluster snapshot ... 810
Determining whether the snapshot is available ... 812
Restoring from a DB cluster snapshot ... 813
Parameter groups ... 814
Security groups ... 814
Aurora considerations ... 814
Restoring from a snapshot ... 815
DB cluster snapshot copying ... 818
Copying a DB cluster snapshot with the Amazon Web Services Management Console ... 818
Limitations ... 820
Considerations ... 821
Copying an unencrypted DB cluster snapshot ... 823
Copying an encrypted DB cluster snapshot ... 826
Copying a DB cluster snapshot across accounts ... 829
Sharing a DB cluster snapshot ... 833
Sharing a snapshot ... 834
Sharing public snapshots ... 837
Sharing encrypted snapshots ... 839
Stopping snapshot sharing ... 843
Exporting DB cluster data to Amazon S3 ... 845
Considerations ... 847
Setting up access to an S3 bucket ... 849
Creating DB cluster export tasks ... 852
Monitoring DB cluster exports ... 856
Canceling a DB cluster export ... 858
Troubleshooting ... 860
Exporting DB cluster snapshot data to Amazon S3 ... 863
Considerations ... 865
Setting up access to an S3 bucket ... 877
Creating snapshot export tasks ... 882
Monitoring snapshot exports ... 886
Canceling a snapshot export ... 888
Export performance in Aurora MySQL ... 890
Troubleshooting ... 890

Point-in-time recovery ... 893
Restoring a DB cluster to a point in time ... 894
Point-in-time recovery from a retained automated backup ... 897
Point-in-time recovery using Amazon Backup ... 899
Deleting a DB cluster snapshot ... 906
Deleting a DB cluster snapshot ... 906
Tutorial: Restore a DB cluster from a snapshot ... 908
Restoring a DB cluster using the console ... 908
Restoring a DB cluster using the Amazon CLI ... 913
Monitoring metrics in an Aurora DB cluster ... 920
Monitoring plan ... 920
Performance baseline ... 921
Performance guidelines ... 921
Monitoring tools ... 923
Automated monitoring tools ... 923
Manual monitoring tools ... 925
Viewing cluster status ... 927
Viewing a DB cluster ... 928
Viewing DB cluster status ... 934
Viewing DB instance statusin an Aurora cluster ... 938
Recommendations from Amazon Aurora ... 946
Viewing recommendations ... 948
Applying recommendations ... 955
Dismissing recommendations ... 958
Modifying dismissed recommendations to active ... 960
Recommendations reference ... 962
Viewing metrics in the Amazon RDS console ... 981
Monitoring Aurora with CloudWatch ... 982
Overview of Amazon Aurora and Amazon CloudWatch ... 983
Viewing CloudWatch metrics ... 984
Creating CloudWatch alarms ... 990
Monitoring with Database Insights ... 992
Pricing ... 992
Engine, Region, and instance class support ... 992
Turning on the Advanced mode ... 996
Turning on the Standard mode ... 1000

Monitor slow queries ... 1006
Considerations ... 1007
Monitoring DB load with Amazon CloudWatch Database Insights ... 1008
Analyzing performance with DevOps Guru for RDS ... 1074
Benefits of DevOps Guru for RDS ... 1075
How DevOps Guru for RDS works ... 1076
Setting up DevOps Guru for RDS ... 1077
Monitoring the OS with Enhanced Monitoring ... 1086
Overview of Enhanced Monitoring ... 1086
Setting up and enabling Enhanced Monitoring ... 1088
Viewing OS metrics in the RDS console ... 1095
Viewing OS metrics using CloudWatch Logs ... 1097
Aurora metrics reference ... 1099
CloudWatch metrics for Aurora ... 1099
CloudWatch dimensions for Aurora ... 1139
Availability of Aurora metrics in the Amazon RDS console ... 1140
CloudWatch metrics for Performance Insights ... 1144
Detailed Database Metrics ... 1147
SQL statistics for Performance Insights ... 1179
OS metrics in Enhanced Monitoring ... 1188
Monitoring events, logs, and database activity streams ... 1197
Viewing logs, events, and streams in the Amazon RDS console ... 1198
Monitoring Aurora events ... 1203
Overview of events for Aurora ... 1203
Viewing Amazon RDS events ... 1205
Working with Amazon RDS event notification ... 1209
Creating a rule that triggers on an Amazon Aurora event ... 1235
Amazon RDS event categories and event messages for Aurora ... 1239
Monitoring Aurora logs ... 1275
Viewing and listing database log files ... 1275
Downloading a database log file ... 1277
Watching a database log file ... 1278
Publishing to CloudWatch Logs ... 1280
Reading log file contents using REST ... 1282
MySQL database log files ... 1284
PostgreSQL database log files ... 1294

Monitoring Aurora API calls in CloudTrail ... 1305
CloudTrail integration with Amazon Aurora ... 1305
Amazon Aurora log file entries ... 1306
Monitoring Aurora with Database Activity Streams ... 1310
Overview ... 1310
Aurora MySQL network prerequisites ... 1314
Starting a database activity stream ... 1316
Getting the activity stream status ... 1319
Stopping a database activity stream ... 1320
Monitoring activity streams ... 1321
IAM policy examples for activity streams ... 1358
Monitoring threats with GuardDuty RDS Protection ... 1362
Working with Aurora MySQL ... 1364
Overview of Aurora MySQL ... 1365
Amazon Aurora MySQL performance enhancements ... 1365
Aurora MySQL and spatial data ... 1365
Aurora MySQL version 8.4 compatible with MySQL 8.4 ... 1367
Aurora MySQL version 3 compatible with MySQL 8.0 ... 1384
Aurora MySQL version 2 compatible with MySQL 5.7 ... 1417
Security with Aurora MySQL ... 1420
Master user privileges with Aurora MySQL ... 1421
TLS connections ... 1423
Reserved users in Aurora MySQL ... 1430
Password policies and Password validation in Aurora MySQL ... 1432
Updating applications for new TLS certificates ... 1439
Determining whether any applications are connecting to your Aurora MySQL DB cluster using TLS ... 1440
Determining whether a client requires certificate verification to connect ... 1440
Updating your application trust store ... 1441
Example Java code for establishing TLS connections ... 1442
Using Kerberos authentication for Aurora MySQL ... 1444
Overview of Kerberos authentication for Aurora MySQL ... 1445
Limitations ... 1446
Setting up Kerberos authentication for Aurora MySQL ... 1448
Connecting to Aurora MySQL with Kerberos authentication ... 1459
Managing a DB cluster in a domain ... 1463

Migrating data to Aurora MySQL 1465
Migrating from an external MySQL database to Aurora MySQL 1470
Migrating from a MySQL DB instance to Aurora MySQL 1498
Managing Aurora MySQL 1523
Managing performance and scaling for Amazon Aurora MySQL 1523
Backtracking a DB cluster 1535
Testing Amazon Aurora MySQL using fault injection queries 1557
Altering tables in Amazon Aurora using Fast DDL 1561
Displaying volume status for an Aurora DB cluster 1568
Transaction timeout 1569
Tuning Aurora MySQL 1574
Essential concepts for Aurora MySQL tuning 1574
Tuning Aurora MySQL with wait events 1578
Tuning Aurora MySQL with thread states 1633
Tuning Aurora MySQL with Amazon DevOps Guru proactive insights 1640
Parallel query for Aurora MySQL 1647
Overview of parallel query 1647
Creating a parallel query cluster 1651
Turning parallel query on and off 1655
Optimizing parallel query 1659
Verifying parallel query usage 1663
Monitoring parallel query 1667
SQL constructs for parallel query 1674
Advanced Auditing with Aurora MySQL 1695
Enabling Advanced Auditing 1695
Viewing audit logs 1699
Audit log details 1699
Replication with Aurora MySQL 1701
Aurora Replicas 1701
Replication options 1703
Replication performance 1704
Replication filters 1704
Monitoring replication 1711
Cross-Region replication 1712
Binary log (binlog) replication 1727
GTID-based replication 1770

Delayed replication ... 1778
Multi-source replication ... 1783
Local write forwarding ... 1795
Enabling local write forwarding ... 1796
Checking if a DB cluster has write forwarding enabled ... 1797
Application and SQL compatibility with write forwarding ... 1799
Isolation levels for write forwarding ... 1801
Read consistency ... 1801
Running multipart statements with write forwarding ... 1805
Transactions with write forwarding ... 1805
Configuration parameters for write forwarding ... 1806
Metrics for write forwarding ... 1807
Identifying forwarded transactions and queries ... 1811
Integrating Aurora MySQL with Amazon services ... 1814
Authorizing Aurora MySQL to access Amazon services ... 1814
Loading data from text files in Amazon S3 ... 1833
Saving data into text files in Amazon S3 ... 1847
Invoking a Lambda function from Aurora MySQL ... 1858
Publishing Aurora MySQL logs to CloudWatch Logs ... 1870
Aurora MySQL lab mode ... 1876
Aurora lab mode features ... 1876
Best practices with Aurora MySQL ... 1878
Determining which DB instance you are connected to ... 1879
Best practices for performance and scaling ... 1879
Best practices for high availability ... 1889
Recommendations for MySQL features ... 1890
Evaluating DB instance usage for Aurora MySQL with Amazon CloudWatch metrics ... 1897
Troubleshooting Aurora MySQL performance ... 1900
Amazon monitoring options ... 1900
Most common reasons for DB performance issues ... 1901
Troubleshooting workload issues ... 1902
Logging for Aurora MySQL ... 1938
Troubleshooting database connection issues ... 1940
Troubleshooting query performance ... 1956
Troubleshooting replication lag ... 1961
Aurora MySQL reference ... 1991

Configuration parameters ... 1991
Global status variables ... 2064
Wait events ... 2080
Thread states ... 2086
Isolation levels ... 2091
Hints ... 2097
Stored procedure reference ... 2101
information_schema tables ... 2175
Aurora MySQL updates ... 2183
Checking version numbers ... 2183
Long-term support and beta releases ... 2187
Preparing for Aurora MySQL version 2 end of life ... 2189
Preparing for Aurora MySQL version 1 end of life ... 2193
Upgrading Amazon Aurora MySQL DB clusters ... 2196
Database engine updates and fixes for Amazon Aurora MySQL ... 2352
Working with Aurora PostgreSQL ... 2353
The database preview environment ... 2355
Unsupported features in the preview environment ... 2355
PostgreSQL version 17 in the Database Preview environment ... 2356
Security with Aurora PostgreSQL ... 2356
Understanding PostgreSQL roles and permissions ... 2358
Securing Aurora PostgreSQL data with SSL/TLS ... 2373
Aurora PostgreSQL dynamic masking ... 2385
Updating applications for new SSL/TLS certificates ... 2422
Determining whether applications are connecting to Aurora PostgreSQL DB clusters using SSL ... 2423
Determining whether a client requires certificate verification in order to connect ... 2424
Updating your application trust store ... 2425
Using SSL/TLS connections for different types of applications ... 2425
Using Kerberos authentication ... 2426
Region and version availability ... 2428
Overview of Kerberos authentication ... 2428
Setting up ... 2429
Managing an Aurora PostgreSQL DB cluster in an Active Directory domain ... 2445
Connecting with Kerberos authentication ... 2446
Considerations ... 2448

Using AD security groups for Aurora PostgreSQL access control 2450
Migrating data to Aurora PostgreSQL 2462
Migrating an RDS for PostgreSQL DB instance using a snapshot 2463
Migrating an RDS for PostgreSQL DB instance using an Aurora read replica 2470
Optimizing query performance in Aurora PostgreSQL 2484
Improving query performance with Aurora Optimized Reads 2484
Optimizing correlated subqueries in Aurora PostgreSQL 2491
Improving query performance using adaptive join 2503
Using shared plan cache 2505
Working with unlogged tables in Aurora PostgreSQL 2507
Creating unlogged tables 2508
Handling unlogged tables during migration 2508
Converting unlogged tables to logged tables 2509
Unlogged tables and logical replication 2509
Working with PostgreSQL autovacuum 2509
Allocating memory for autovacuum 2510
Reducing the likelihood of transaction ID wraparound 2512
Determining if the tables in your database need vacuuming 2513
Determining which tables are currently eligible for autovacuum 2514
Determining if autovacuum is currently running and for how long 2516
Performing a manual vacuum freeze 2517
Reindexing a table when autovacuum is running 2519
Managing autovacuum with large indexes 2520
Other parameters that affect autovacuum 2524
Setting table-level autovacuum parameters 2524
Logging autovacuum and vacuum activities 2525
Understanding the behavior of autovacuum with invalid databases 2526
Identifying vacuum blockers 2529
Adaptive autovacuum in PostgreSQL 18 2552
Managing TOAST OID contention 2554
Understanding TOAST operations 2554
Identifying performance challenges 2555
Recommendations 2557
Monitoring 2557
Using Babelfish for Aurora PostgreSQL 2563
Babelfish limitations 2565

Understanding Babelfish architecture and configuration ... 2566
Creating a Babelfish for Aurora PostgreSQL DB cluster ... 2608
Migrating a SQL Server database to Babelfish ... 2619
Database authentication with Babelfish for Aurora PostgreSQL ... 2629
Connecting to a Babelfish DB cluster ... 2647
Working with Babelfish ... 2660
Troubleshooting Babelfish ... 2750
Managing Babelfish version updates ... 2752
Babelfish reference ... 2773
Performance and scaling for Aurora PostgreSQL ... 2818
Scaling Aurora PostgreSQL DB instances ... 2818
Maximum connections ... 2819
Temporary storage limits ... 2820
Huge pages for Aurora PostgreSQL ... 2825
Testing Amazon Aurora PostgreSQL by using fault injection queries ... 2825
Displaying volume status for an Aurora DB cluster ... 2830
Specifying the RAM disk for the stats_temp_directory ... 2831
Managing temporary files with PostgreSQL ... 2832
Tuning with wait events for Aurora PostgreSQL ... 2839
Essential concepts for Aurora PostgreSQL tuning ... 2840
Aurora PostgreSQL wait events ... 2845
Client:ClientRead ... 2847
Client:ClientWrite ... 2851
CPU ... 2853
IO:BufFileRead and IO:BufFileWrite ... 2859
IO:DataFileRead ... 2867
IO:XactSync ... 2878
IPC:DamRecordTxAck ... 2880
IPC:parallel wait events ... 2881
IPC:ProcArrayGroupUpdate ... 2887
Lock:advisory ... 2890
Lock:extend ... 2893
Lock:Relation ... 2896
Lock:transactionid ... 2902
Lock:tuple ... 2905
LWLock:buffer_content (BufferContent) ... 2909

LWLock:buffer_mapping ... 2913
LWLock:BufferIO (IPC:BufferIO) ... 2916
LWLock:lock_manager ... 2918
LWLock:MultiXact ... 2922
LWLock:pg_stat_statements ... 2927
Timeout:PgSleep ... 2931
Tuning Aurora PostgreSQL with Amazon DevOps Guru proactive insights ... 2931
Database has long running idle in transaction connection ... 2932
Best practices with Aurora PostgreSQL ... 2935
Avoiding slow performance, automatic restart, and failover for Aurora PostgreSQL DB instances ... 2936
Diagnosing table and index bloat ... 2936
Managing high object counts in Amazon Aurora PostgreSQL ... 2941
Improved memory management in Aurora PostgreSQL ... 2947
Fast failover ... 2950
Fast recovery after failover ... 2961
Managing connection churn ... 2968
Dead connection handling in PostgreSQL ... 2976
Tuning memory parameters for Aurora PostgreSQL ... 2979
Analyze resource usage with CloudWatch metrics ... 2987
Using logical replication for a major version upgrade ... 2991
Managing custom casts ... 3000
Best Practices for Parallel Queries in Aurora PostgreSQL ... 3004
REPLICA IDENTITY FULL performance ... 3009
Initial PostgreSQL troubleshooting ... 3018
Troubleshooting storage issues in Aurora PostgreSQL ... 3024
Replication with Aurora PostgreSQL ... 3025
Aurora Replicas ... 3026
Improving the read availability of Aurora Replicas ... 3027
Monitoring replication ... 3029
Overview of logical replication ... 3029
Setting up logical replication ... 3031
Turning off logical replication ... 3033
Monitoring the write-through cache and logical slots ... 3033
Example: Using logical replication ... 3036
Example: Logical replication using Aurora PostgreSQL and Amazon DMS ... 3038

Configuring IAM authentication for logical replication connections 3040
Local write forwarding in Aurora PostgreSQL 3043
Limitations and considerations of local write forwarding in Aurora PostgreSQL 3044
Configuring Aurora PostgreSQL for Local write forwarding 3046
Working with local write forwarding for Aurora PostgreSQL 3049
Monitoring local write forwarding in Aurora PostgreSQL 3052
Using Aurora PostgreSQL as a Knowledge Base for Amazon Bedrock 3059
Prerequisites 3059
Preparing Aurora PostgreSQL to be a Knowledge Base 3060
Creating a Knowledge Base in the Bedrock console 3063
Quick create an Aurora PostgreSQL Knowledge Base for Amazon Bedrock 3065
Integrating Aurora PostgreSQL with Amazon services 3067
Importing data from Amazon S3 into Aurora PostgreSQL 3069
Exporting PostgreSQL data to Amazon S3 3088
Invoking a Lambda function from Aurora PostgreSQL 3105
Publishing Aurora PostgreSQL logs to CloudWatch Logs 3121
Monitoring query execution plans and peak memory for Aurora PostgreSQL 3133
Accessing query execution plans and peak memory using Aurora functions 3134
Parameter reference for Aurora PostgreSQL query execution plans 3135
Managing query execution plans for Aurora PostgreSQL 3139
Overview of Aurora PostgreSQL query plan management 3139
Best practices for Aurora PostgreSQL query plan management 3147
Query plan management 3150
Capturing Aurora PostgreSQL execution plans 3152
Using Aurora PostgreSQL managed plans 3155
Examining Aurora PostgreSQL query plans in the dba_plans view 3160
Improving plans 3161
Deleting plans 3165
Exporting and importing managed plans 3167
Parameter reference 3168
Function reference 3174
Reference for the apg_plan_mgmt.dba_plans view 3185
Advanced features in Query Plan Management 3190
Working with extensions and foreign data wrappers 3204
Using Amazon Aurora delegated extension support for PostgreSQL 3205
Managing large objects more efficiently with the lo module 3218

Managing spatial data with PostGIS ... 3222
Managing partitions with the pg_partman extension ... 3231
Scheduling maintenance with the pg_cron extension ... 3237
Using pgAudit to log database activity ... 3246
Using pglogical to synchronize data ... 3259
Supported foreign data wrappers in Amazon Aurora PostgreSQL ... 3273
rds_tools functions reference ... 3288
Working with Trusted Language Extensions for PostgreSQL ... 3291
Terminology ... 3292
Requirements for using Trusted Language Extensions ... 3293
Setting up Trusted Language Extensions ... 3296
Overview of Trusted Language Extensions ... 3299
Creating TLE extensions ... 3301
Dropping your TLE extensions from a database ... 3306
Uninstalling Trusted Language Extensions ... 3307
Using PostgreSQL hooks with your TLE extensions ... 3308
Function reference for Trusted Language Extensions ... 3314
Hooks reference for Trusted Language Extensions ... 3328
Aurora PostgreSQL reference ... 3331
Aurora PostgreSQL collations for EBCDIC and other mainframe migrations ... 3331
Collations supported in Aurora PostgreSQL ... 3333
Aurora PostgreSQL functions reference ... 3334
Aurora PostgreSQL parameters ... 3392
Aurora PostgreSQL wait events ... 3454
Aurora PostgreSQL updates ... 3481
Identifying versions of Amazon Aurora PostgreSQL ... 3481
Aurora PostgreSQL releases ... 3483
Extension versions for Aurora PostgreSQL ... 3484
Upgrading Amazon Aurora PostgreSQL DB clusters ... 3484
Using a long-term support (LTS) release ... 3521
Using Aurora PostgreSQL Limitless Database ... 3524
Limitless Database architecture ... 3525
Key terms ... 3527
Table types ... 3528
Billing ... 3528
Getting started with Limitless Database ... 3529

Aurora PostgreSQL Limitless Database requirements and considerations 3530
Requirements 3530
Considerations 3531
Features not supported 3533
Prerequisites for using Limitless Database 3534
Enabling DB shard group operations 3534
Creating a DB cluster that uses Limitless Database 3535
Correlating maximum capacity with routers and shards 3535
Creating your DB cluster 3538
Working with DB shard groups 3547
Connecting to your Aurora PostgreSQL Limitless Database DB cluster 3548
Finding the number of routers and shards in a DB shard group 3549
Describing DB shard groups 3549
Rebooting a DB shard group 3550
Changing the capacity of a DB shard group 3551
Splitting a shard 3553
Adding a router 3559
Deleting a DB shard group 3563
Adding a DB shard group to an existing Limitless Database DB cluster 3564
Creating Limitless Database tables 3569
Creating limitless tables by using variables 3570
Converting standard tables to limitless tables 3575
Sample schemas 3579
Loading data into Limitless Database 3581
Using the COPY command with Limitless Database 3583
Using the Limitless Database data loading utility 3585
Querying Limitless Database 3613
Single-shard queries 3614
Distributed queries 3624
Distributed query tracing 3625
Distributed deadlocks 3633
Managing Limitless Database 3636
Database and table size considerations 3636
Reclaiming storage space by vacuuming 3637
Monitoring Limitless Database 3641
Monitoring Limitless Database with CloudWatch 3642

Instance monitoring ... 3647
Monitoring Limitless Database with Database Insights ... 3653
Monitoring Limitless Database with CloudWatch Logs ... 3665
Monitoring Limitless Database with Enhanced Monitoring ... 3666
Monitoring Limitless Database with Performance Insights ... 3667
Monitoring Limitless Database with GuardDuty RDS Protection ... 3675
Functions and views for Limitless Database ... 3676
Wait events for Limitless Database ... 3702
Building for efficiency with functions ... 3715
Backing up and restoring Limitless Database ... 3723
Backing up a DB cluster that uses Aurora PostgreSQL Limitless Database ... 3723
Restoring a DB cluster that uses Aurora PostgreSQL Limitless Database ... 3725
PostgreSQL backup and restore utilities not supported ... 3728
Upgrading Limitless Database ... 3729
Upgrading DB clusters that use Aurora PostgreSQL Limitless Database ... 3729
Limitless Database reference ... 3731
DDL commands ... 3731
DDL limitations and information ... 3740
DML commands ... 3778
DML limitations and information ... 3781
Variables ... 3785
DB cluster parameters ... 3786
Using Aurora Global Database ... 3787
Overview of Aurora Global Database ... 3787
Advantages of Amazon Aurora Global Database ... 3789
Region and version availability ... 3790
Limitations of Aurora Global Database ... 3790
Getting started with Aurora Global Database ... 3792
Configuration requirements ... 3793
Creating a global database ... 3795
Adding a secondary cluster ... 3809
Creating a headless secondary cluster ... 3813
Creating a global database from a snapshot ... 3816
Managing an Aurora global database ... 3817
Modifying an Aurora global database ... 3818
Modifying global database parameters ... 3820

Removing a cluster from an Aurora global database ... 3820
Deleting an Aurora global database ... 3824
Tagging for Aurora Global Database ... 3826
Connecting to Aurora Global Database ... 3830
Choosing the endpoint that meets your application needs ... 3831
Viewing the endpoints of a global database ... 3832
Considerations with using Global writer endpoints ... 3836
Using write forwarding in an Aurora global database ... 3836
Using write forwarding in Aurora MySQL ... 3837
Using write forwarding in Aurora PostgreSQL ... 3857
Switchover or failover for Aurora Global Database ... 3872
Planning for BCDR ... 3873
Performing switchovers ... 3874
Recovering from an unplanned outage ... 3881
Managing RPOs (Aurora PostgreSQL) ... 3891
Cross-Region resiliency for secondary clusters ... 3896
Monitoring an Aurora global database ... 3897
Monitoring an Aurora global database with Performance Insights ... 3898
Monitoring Aurora global databases with Database Activity Streams ... 3899
Monitoring Aurora MySQL-based global databases ... 3899
Monitoring Aurora PostgreSQL-based global databases ... 3902
Using Blue/Green Deployments for Aurora Global Database ... 3906
Benefits of using Blue/Green Deployments with Aurora Global Database ... 3906
How Blue/Green Deployments work with Aurora Global Database ... 3907
Using Aurora global databases with other Amazon services ... 3910
Using Amazon Application Recovery Controller (ARC) with Aurora Global Database ... 3911
Upgrading an Amazon Aurora global database ... 3912
Major version upgrades ... 3912
Minor version upgrades ... 3913
Amazon RDS Proxy ... 3917
Region and version availability ... 3919
Quotas and limitations ... 3919
MySQL limitations ... 3921
PostgreSQL limitations ... 3922
Planning where to use RDS Proxy ... 3923
RDS Proxy concepts and terminology ... 3924

Overview of RDS Proxy concepts ... 3925
Connection pooling ... 3926
Security ... 3927
Failover ... 3932
Transactions ... 3933
Getting started with RDS Proxy ... 3934
Set up a proxy network ... 3934
Setting up database credentials ... 3940
Configuring IAM authentication ... 3944
Creating a proxy ... 3950
Viewing a proxy ... 3963
Connecting through RDS Proxy ... 3964
Managing an RDS Proxy ... 3968
Modifying an RDS Proxy ... 3969
Adding a database user ... 3976
Moving to end-to-end IAM authentication ... 3977
RDS Proxy connection considerations ... 3981
Avoid pinning RDS Proxy ... 3985
Deleting an RDS Proxy ... 3990
Working with RDS Proxy endpoints ... 3991
Overview of proxy endpoints ... 3992
Limitations for proxy endpoints ... 3993
Using reader endpoints with Aurora clusters ... 3993
Accessing Aurora databases across VPCs ... 3998
Creating a proxy endpoint ... 3999
Viewing proxy endpoints ... 4002
Modifying a proxy endpoint ... 4003
Deleting a proxy endpoint ... 4005
Monitoring RDS Proxy with CloudWatch ... 4006
RDS Proxy monitoring dashboard ... 4016
Working with RDS Proxy events ... 4027
RDS Proxy events ... 4027
RDS Proxy examples ... 4030
Troubleshooting RDS Proxy ... 4033
Verifying connectivity for a proxy ... 4033
Common issues and solutions ... 4035

Troubleshooting for RDS for MySQL 4036
Troubleshooting for RDS for PostgreSQL 4038
Using RDS Proxy with Amazon CloudFormation 4045
Using RDS Proxy with Blue/Green Deployments 4046
Switchover when using RDS Proxy 4046
Limitations 4047
Using RDS Proxy with Aurora global databases 4047
Limitations for RDS Proxy with global databases 4048
How RDS Proxy endpoints work with global databases 4048
Best practices with RDS Proxy 4049
Common usage scenarios 4049
Application and workload considerations 4056
Configuration guidelines 4060
On-Demand Capacity Reservations 4072
Getting started with On-Demand Capacity Reservations 4072
Differences from reserved DB instances and Savings Plans 4074
Quotas for Capacity Reservations 4075
Considerations and limitations 4075
Capacity Reservation states 4076
Capacity Reservation pricing and billing 4077
Pricing 4077
Billing 4078
Billing discounts 4079
Viewing your bill 4079
Creating a Capacity Reservation 4080
Creating a future-dated reservation 4083
Viewing and modifying your Capacity Reservations 4086
Viewing Capacity Reservations 4086
Modifying a Capacity Reservation 4088
Canceling a Capacity Reservation 4090
Using a Capacity Reservation with an Aurora DB instance 4091
Stopping and starting a DB cluster in a reservation 4093
Zero-ETL integrations 4095
Benefits 4097
Key concepts 4097
Limitations 4098

General limitations ... 4099
Aurora MySQL limitations ... 4100
Aurora PostgreSQL limitations ... 4100
Amazon Redshift limitations ... 4101
Amazon SageMaker AI lakehouse limitations ... 4101
Quotas ... 4101
Supported Regions ... 4101
Getting started with zero-ETL integrations ... 4102
Step 1: Create a custom DB cluster parameter group ... 4102
Step 2: Select or create a source DB cluster ... 4104
Step 3a: Create a target data warehouse ... 4104
Set up an integration using the Amazon SDKs ... 4105
Step 3b: Create an Amazon Glue catalog for Amazon SageMaker Lakehouse zero-ETL integration ... 4115
Next steps ... 4119
Creating zero-ETL integrations with Amazon Redshift ... 4119
Prerequisites ... 4119
Required permissions ... 4120
Creating zero-ETL integrations ... 4123
Encrypting integrations ... 4127
Next steps ... 4129
Creating zero-ETL integrations with an Amazon SageMaker lakehouse ... 4129
Prerequisites ... 4129
Required permissions ... 4130
Creating zero-ETL integrations with an Amazon SageMaker lakehouse ... 4132
Encrypting integrations ... 4138
Next steps ... 4140
Data filtering for zero-ETL integrations ... 4140
Format of a data filter ... 4141
Filter logic ... 4143
Filter precedence ... 4144
Aurora MySQL examples ... 4144
Aurora PostgreSQL examples ... 4145
Adding data filters ... 4146
Removing data filters ... 4148
Adding and querying data ... 4148

Creating a target database ... 4149
Adding data to the source DB cluster ... 4149
Querying your Aurora data in Amazon Redshift ... 4150
Data type differences ... 4152
DDL operations for Aurora PostgreSQL ... 4164
Viewing and monitoring zero-ETL integrations ... 4166
Viewing integrations ... 4167
Monitoring using system tables ... 4168
Monitoring with EventBridge ... 4169
Modifying zero-ETL integrations ... 4169
Deleting zero-ETL integrations ... 4171
Troubleshooting zero-ETL integrations ... 4172
I can't create a zero-ETL integration ... 4172
My integration is stuck in a state of `Syncing` ... 4173
My tables aren't replicating to Amazon Redshift ... 4173
One or more of my Amazon Redshift tables requires a resync ... 4174
Integration failed issues for Amazon SageMaker AI lakehouse zero-ETL integrations ... 4177
DDL operations that aren't complete appear in Amazon Redshift ... 4177
Using Aurora serverless ... 4178
Aurora serverless use cases ... 4178
Converting provisioned workloads ... 4180
Advantages of Aurora serverless ... 4181
How Aurora serverless works ... 4182
Overview ... 4182
Cluster configurations ... 4184
Capacity ... 4185
Scaling ... 4188
High availability ... 4190
Storage ... 4191
Configuration parameters ... 4192
Requirements and limitations for Aurora serverless ... 4192
Region and version availability ... 4193
Clusters that use Aurora serverless must have a capacity range specified ... 4193
Incompatible scaling configuration ... 4194
Some provisioned features aren't supported in Aurora serverless ... 4196
Creating an Aurora serverless DB cluster ... 4196

Settings ... 4197
Creating an Aurora serverless DB cluster ... 4198
Creating an Aurora serverless writer ... 4203
Managing Aurora serverless ... 4204
Setting the Aurora serverless capacity range for a cluster ... 4204
Checking the Aurora serverless capacity range ... 4211
Checking the Aurora serverless platform version ... 4213
Adding an Aurora serverless reader ... 4216
Converting from provisioned to Aurora serverless ... 4217
Converting from Aurora serverless to provisioned ... 4218
Pausing Aurora serverless DB instances ... 4219
Choosing the promotion tier for an Aurora serverless reader ... 4219
Using TLS/SSL with Aurora serverless ... 4220
Viewing Aurora serverless writers and readers ... 4222
Logging for Aurora serverless ... 4223
Performance and scaling for Aurora serverless ... 4229
Choosing the capacity range ... 4230
Working with parameter groups for Aurora serverless ... 4244
Avoiding out-of-memory errors and CPU saturation ... 4250
Important CloudWatch metrics ... 4251
Monitoring Aurora serverless performance with Performance Insights ... 4255
Troubleshooting Aurora serverless capacity issues ... 4256
Scaling to 0 ACUs with auto-pause and resume ... 4258
Overview of auto-pause ... 4258
Prerequisites and Limitations ... 4260
Turning auto-pause on and off ... 4260
How auto-pause works ... 4264
Auto-pause and Aurora cluster configurations ... 4268
Monitoring auto-pause ... 4271
Troubleshooting for auto-pause ... 4274
Application design for auto-pause ... 4276
Using the Amazon RDS Data API ... 4278
Region and version availability for the Amazon RDS Data API ... 4279
IPv6 support ... 4279
IPv6 endpoint support ... 4279
Using IPv6 endpoints ... 4280

Using Amazon PrivateLink with IPv6 4283
Migration considerations 4283
Troubleshooting IPv6 connectivity 4283
Limitations 4284
Session management 4284
Authentication and authorization 4285
Tag-based authorization 4287
Storing credentials in a Secrets Manager secret 4289
Enabling Data API 4289
Enabling RDS Data API when you create a database 4290
Enabling or disabling RDS Data API on an existing database 4291
Creating a Amazon VPC endpoint (PrivateLink) 4293
Calling Data API 4296
Operations reference 4297
Calling from Amazon CLI 4302
Calling from Python apps 4312
Calling from Java apps 4316
Controlling timeout behavior 4320
Java client library 4322
Downloading the Java client library for Data API 4322
Java client library examples 4323
Processing query results in JSON 4325
Retrieving query results in JSON format 4326
Data Type Mapping 4326
Troubleshooting 4327
Examples 4328
Troubleshooting Data API 4332
Transaction <transaction_ID> isn't found 4333
Packet for query is too large 4333
Database response exceeded size limit 4333
HttpEndpoint isn't enabled for cluster <cluster_ID> 4334
DatabaseErrorException: Transaction is still running a query 4334
Unsupported result exception 4334
Multi-statements aren't supported 4335
Schema parameter isn't supported 4335
IPv6 connectivity issues 4335

Logging Data API calls ... 4336
Working with Data API information in CloudTrail ... 4336
Including and excluding Data API events from a CloudTrail trail ... 4337
Understanding Data API log file entries ... 4338
Monitoring Data API queries ... 4340
How RDS Data API queries are represented in Performance Insights ... 4340
Using the query editor ... 4341
Availability of the query editor ... 4341
Authorizing access ... 4341
Running queries ... 4343
DBQMS API reference ... 4347
CreateFavoriteQuery ... 4348
CreateQueryHistory ... 4348
CreateTab ... 4348
DeleteFavoriteQueries ... 4348
DeleteQueryHistory ... 4348
DeleteTab ... 4348
DescribeFavoriteQueries ... 4348
DescribeQueryHistory ... 4348
DescribeTabs ... 4349
GetQueryString ... 4349
UpdateFavoriteQuery ... 4349
UpdateQueryHistory ... 4349
UpdateTab ... 4349
Using Aurora machine learning ... 4350
Using Aurora machine learning with Aurora MySQL ... 4350
Requirements for using Aurora machine learning ... 4351
Region and version availability ... 4352
Supported features and limitations ... 4353
Setting up your Aurora cluster for Aurora machine learning ... 4354
Using Amazon Bedrock with your Aurora MySQL DB cluster ... 4368
Using Amazon Comprehend with your Aurora MySQL DB cluster ... 4371
Using SageMaker AI with your Aurora MySQL DB cluster ... 4373
Performance considerations ... 4377
Monitoring ... 4379
Using Aurora machine learning with Aurora PostgreSQL ... 4380

Requirements for using Aurora machine learning ... 4381
Supported features and limitations ... 4382
Setting up your Aurora DB cluster to use Aurora machine learning ... 4382
Using Amazon Bedrock with your Aurora PostgreSQL DB cluster ... 4395
Using Amazon Comprehend with your Aurora PostgreSQL DB cluster ... 4397
Using SageMaker AI with your Aurora PostgreSQL DB cluster ... 4399
Exporting data to Amazon S3 for SageMaker AI model training (Advanced) ... 4404
Performance considerations ... 4404
Monitoring ... 4410
Code examples ... 4412
Basics ... 4413
Hello Aurora ... 4414
Learn the basics ... 4424
Actions ... 4593
Scenarios ... 4801
Create a lending library REST API ... 4801
Create an Aurora Serverless work item tracker ... 4802
Best practices with Aurora ... 4807
Basic operational guidelines for Amazon Aurora ... 4807
DB instance RAM recommendations ... 4808
Amazon database drivers ... 4809
Monitoring Amazon Aurora ... 4809
Working with DB parameter groups and DB cluster parameter groups ... 4810
Amazon Aurora best practices video ... 4810
Performing an Aurora proof of concept ... 4811
Overview of an Aurora proof of concept ... 4811
1. Identify your objectives ... 4812
2. Understand your workload characteristics ... 4813
3. Practice with the console or CLI ... 4814
Practice with the console ... 4814
Practice with the Amazon CLI ... 4815
4. Create your Aurora cluster ... 4815
5. Set up your schema ... 4816
6. Import your data ... 4817
7. Port your SQL code ... 4818
8. Specify configuration settings ... 4819

9. Connect to Aurora ... 4819
10. Run your workload ... 4821
11. Measure performance ... 4822
12. Exercise Aurora high availability ... 4824
13. What to do next ... 4827
Security ... 4829
Database authentication ... 4831
Password authentication ... 4832
IAM database authentication ... 4833
Kerberos authentication ... 4833
Password management with Aurora and Secrets Manager ... 4835
Region and version availability ... 4835
Limitations ... 4835
Overview ... 4836
Benefits ... 4837
Permissions ... 4837
Enforcing Aurora management ... 4838
Managing password for DB cluster ... 4839
Rotating secrets for DB clusters ... 4843
Viewing secrets details for DB clusters ... 4845
Data protection ... 4848
Data encryption ... 4849
Internetwork traffic privacy ... 4876
Identity and access management ... 4878
Audience ... 4878
Authenticating with identities ... 4879
Managing access using policies ... 4881
How Amazon Aurora works with IAM ... 4883
Identity-based policy examples ... 4890
Amazon managed policies ... 4912
Policy updates ... 4918
Cross-service confused deputy prevention ... 4928
IAM database authentication ... 4930
Troubleshooting ... 4979
Logging and monitoring ... 4981
Compliance validation ... 4984

Resilience ... 4985
Backup and restore ... 4985
Replication ... 4985
Failover ... 4986
Infrastructure security ... 4987
Security groups ... 4987
Public accessibility ... 4987
VPC endpoints (Amazon PrivateLink) ... 4989
Considerations ... 1070
Availability ... 1071
Creating an interface VPC endpoint ... 1071
Creating a VPC endpoint policy ... 1071
Security best practices ... 4992
Controlling access with security groups ... 4994
Overview of VPC security groups ... 4994
Security group scenario ... 4995
Creating a VPC security group ... 4996
Associating with a DB cluster ... 4997
Master user account privileges ... 4997
Service-linked roles ... 5000
Service-linked role permissions for Amazon Aurora ... 5000
Service-linked role permissions for Amazon RDS Beta ... 5003
Service-linked role for Amazon RDS Preview ... 5004
Using Amazon Aurora with Amazon VPC ... 5006
Working with a DB cluster in a VPC ... 5006
Scenarios for accessing a DB cluster in a VPC ... 5023
Tutorial: Create a VPC for use with a DB cluster (IPv4 only) ... 5030
Tutorial: Create a VPC for use with a DB cluster (dual-stack mode) ... 5038
Quotas and constraints ... 5049
Quotas in Amazon Aurora ... 5049
Naming constraints in Amazon Aurora ... 5055
Amazon Aurora size limits ... 5056
API request throttling ... 5057
How throttling is applied ... 5058
Token bucket size and refill rate ... 5058
Retries and exponential backoff ... 5059

Resource status changes ... 5059
Retries ... 5060
Reduce the number of API requests ... 5060
Identify the source of throttled requests ... 5061
View your current API limits ... 5061
Request a limit increase ... 5061
Recommendations ... 5061
Open a support case ... 5062
Troubleshooting ... 5064
Can't connect to DB instance ... 5064
Testing the DB instance connection ... 5066
Troubleshooting connection authentication ... 5067
Security issues ... 5067
Error message "failed to retrieve account attributes, certain console functions may be impaired." ... 5067
Resetting the DB instance owner password ... 5068
DB instance outage or reboot ... 5068
Parameter changes not taking effect ... 5069
Aurora freeable memory issues ... 5069
Aurora MySQL replication issues ... 5070
Diagnosing and resolving lag between read replicas ... 5070
Diagnosing and resolving a MySQL read replication failure ... 5072
Replication stopped error ... 5074
Read replica replication fails to initialize metadata structure ... 5075
Amazon RDS API reference ... 5076
Using the Query API ... 5076
Query parameters ... 5076
Query request authentication ... 5077
Troubleshooting applications ... 5077
Retrieving errors ... 5077
Troubleshooting tips ... 5078
Document history ... 5079
Amazon Glossary ... 5200

What is Amazon Aurora?

Amazon Aurora (Aurora) is a fully managed relational database engine that's compatible with MySQL and PostgreSQL. You already know how MySQL and PostgreSQL combine the speed and reliability of high-end commercial databases with the simplicity and cost-effectiveness of open-source databases. The code, tools, and applications you use today with your existing MySQL and PostgreSQL databases can be used with Aurora. Aurora delivers up to 6x the throughput of stock PostgreSQL and up to 6x the throughput of stock MySQL on similar hardware.

Aurora includes a high-performance storage subsystem. Its MySQL- and PostgreSQL-compatible database engines are customized to take advantage of that fast distributed storage. The underlying storage grows automatically as needed. An Aurora cluster volume can grow to a maximum size of 256 tebibytes (TiB). Aurora also automates and standardizes database clustering and replication, which are typically among the most challenging aspects of database configuration and administration.

Aurora is part of the managed database service Amazon Relational Database Service (Amazon RDS). Amazon RDS makes it easier to set up, operate, and scale a relational database in the cloud. If you are not already familiar with Amazon RDS, see the *Amazon Relational Database Service User Guide*. To learn more about the variety of database options available on Amazon Web Services, see Choosing the right database for your organization on Amazon.

Topics

- Amazon RDS shared responsibility model
- How Amazon Aurora works with Amazon RDS
- Amazon Aurora DB clusters
- Amazon Aurora versions
- Regions and Availability Zones
- Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine
- Amazon Aurora endpoint connections
- Amazon AuroraDB instance classes
- Amazon Aurora storage
- Amazon Aurora reliability
- Amazon Aurora security

- High availability for Amazon Aurora
- Replication with Amazon Aurora
- DB instance billing for Aurora
- Amazon Aurora on the Amazon Free Tier

Amazon RDS shared responsibility model

Amazon RDS is responsible for hosting the software components and infrastructure of DB instances and DB clusters. You are responsible for query tuning, which is the process of adjusting SQL queries to improve performance. Query performance is highly dependent on database design, data size, data distribution, application workload, and query patterns, which can vary greatly. Monitoring and tuning are highly individualized processes that you own for your RDS databases. You can use Amazon RDS Performance Insights and other tools to identify problematic queries.

How Amazon Aurora works with Amazon RDS

The following points illustrate how Amazon Aurora relates to the standard MySQL and PostgreSQL engines available in Amazon RDS:

- You choose Aurora MySQL or Aurora PostgreSQL as the DB engine option when setting up new database servers through Amazon RDS.
- Aurora takes advantage of the familiar Amazon Relational Database Service (Amazon RDS) features for management and administration. Aurora uses the Amazon RDS Amazon Web Services Management Console interface, Amazon CLI commands, and API operations to handle routine database tasks such as provisioning, patching, backup, recovery, failure detection, and repair.
- Aurora management operations typically involve entire clusters of database servers that are synchronized through replication, instead of individual database instances. The automatic clustering, replication, and storage allocation make it simple and cost-effective to set up, operate, and scale your largest MySQL and PostgreSQL deployments.
- You can bring data from Amazon RDS for MySQL and Amazon RDS for PostgreSQL into Aurora by creating and restoring snapshots, or by setting up one-way replication. You can use push-button migration tools to convert your existing RDS for MySQL and RDS for PostgreSQL applications to Aurora.


Before using Amazon Aurora, complete the steps in Setting up your environment for Amazon Aurora, and then review the concepts and features of Aurora in Amazon Aurora DB clusters.

Amazon Aurora DB clusters

An Amazon Aurora *DB cluster* consists of one or more DB instances and a cluster volume that manages the data for those DB instances. An Aurora *cluster volume* is a virtual database storage volume that spans multiple Availability Zones, with each Availability Zone having a copy of the DB cluster data. Two types of DB instances make up an Aurora DB cluster:

- **Primary (writer) DB instance** – Supports read and write operations, and performs all of the data modifications to the cluster volume. Each Aurora DB cluster has one primary DB instance.
- **Aurora Replica (reader DB instance)** – Connects to the same storage volume as the primary DB instance but supports only read operations. Each Aurora DB cluster can have up to 15 Aurora Replicas in addition to the primary DB instance. Maintain high availability by locating Aurora Replicas in separate Availability Zones. Aurora automatically fails over to an Aurora Replica in case the primary DB instance becomes unavailable. You can specify the failover priority for Aurora Replicas. Aurora Replicas can also offload read workloads from the primary DB instance.

The following diagram illustrates the relationship between the cluster volume, the writer DB instance, and reader DB instances in an Aurora DB cluster.

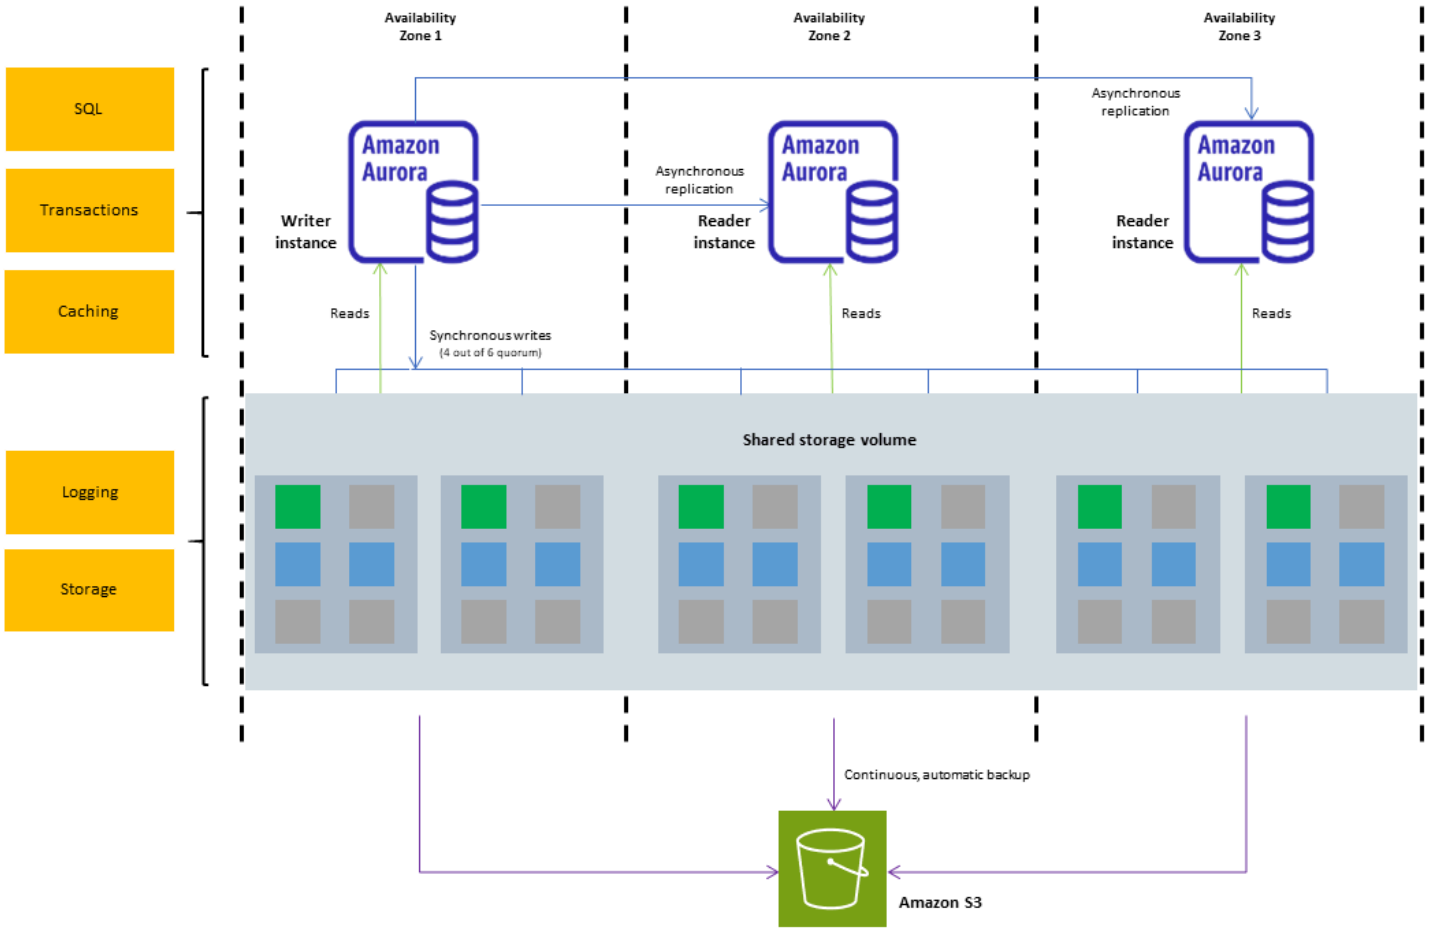

> **Note**
>
> The preceding information applies to all Aurora DB clusters—provisioned, parallel query, Aurora Global Database, Aurora Serverless, Aurora MySQL-Compatible, and Aurora PostgreSQL-Compatible.

The Aurora DB cluster illustrates the separation of compute capacity and storage. For example, an Aurora configuration with only a single DB instance is still a cluster, because the underlying storage volume involves multiple storage nodes distributed across multiple Availability Zones (AZs).

Input/output (I/O) operations in Aurora DB clusters are counted the same way, regardless of whether they're on a writer or reader DB instance. For more information, see Storage configurations for Amazon Aurora DB clusters.

Amazon Aurora versions

With Amazon Aurora, you can choose the supported relational database engine that best fits your application requirements while maintaining compatibility with the underlying engines. Aurora reuses the database engine code from supported engines, so you can leverage existing skills, tools, and libraries for those engines. When you create a cluster, you specify the Amazon Aurora database engine version that you want to use. The version that you choose determines compatibility and available features.

This documentation explains the common points and differences between Amazon Aurora and the corresponding database engines. With this information, you can determine the software version that you should select and how to verify the available features and bug fixes in each version. You can also use this reference to determine an appropriate upgrade cadence and plan for your upgrade.

Supported database engines for Amazon Aurora database clusters

The following relational databases are available on Amazon Aurora. Aurora reuses code and maintains compatibility with the underlying DB engines. However, Aurora has unique version numbers, release cycles, and timelines for version deprecation. Each new Aurora version comes with release notes that list the new features, fixes, and other changes and enhancements that apply to each version.

Aurora database	User guide	Available versions	Release notes
Amazon Aurora MySQL-Compatible Edition	Working with Amazon Aurora MySQL	Database engine updates for Amazon Aurora MySQL	Release Notes for Aurora MySQL
Amazon Aurora PostgreSQL-Compatible Edition	Working with Amazon Aurora PostgreSQL	Database engine updates for Amazon Aurora PostgreSQL	Release Notes for Aurora PostgreSQL

Specifying the Amazon Aurora database version for your database cluster

When you create a new DB cluster with the **Create database** operation in the Amazon Web Services Management Console or the Amazon CLI, or with the `CreateDBCluster` API operation, you can specify any currently available Aurora database version (major or minor).

To learn how to create Aurora clusters, see Creating an Amazon Aurora DB cluster. To learn how to change the version of an existing Aurora cluster, see Modifying an Amazon Aurora DB cluster.

> **Note**
>
> Not every Aurora database version is available in every Amazon Web Services Region. To learn more about Regions and the available versions in each Amazon Web Services Region, see Regions and Availability Zones and Supported Regions and DB engines for Aurora global databases.

Amazon Aurora versioning

Amazon Aurora versions are different from the upstream community databases that they're compatible with. To help you maintain application compatibility and leverage the latest DB engine features, the following sections explain Aurora versioning conventions and how Aurora versions map to their respective community databases.

For a list of the relational databases that are available on Amazon Aurora, see Supported database engines for Amazon Aurora database clusters.

Differences in version numbers between community databases and Aurora

Each Amazon Aurora version is compatible with a specific version of its corresponding community database. You can find the community version of your database with the `version` function, and the Aurora version with the `aurora_version` function.

The following examples show how to find the community version of your database for Aurora MySQL and Aurora PostgreSQL.

Aurora MySQL

The `version` function returns the community version of your database for Aurora MySQL.

```
mysql> select version();
```

Output example:

```
+------------------+
|   version()      |
+------------------+
|  8.0.32          |
+------------------+
```

And the `aurora_version` function returns the Aurora version:

```
mysql> select aurora_version(), @@aurora_version;
```

For Aurora MySQL version 2 and version 3, the output uses a *`major`*`.`*`minor`*`.`*`patch`* format:

```
+------------------+------------------+
| aurora_version() | @@aurora_version |
+------------------+------------------+
| 3.05.2           | 3.05.2           |
+------------------+------------------+
```

For Aurora MySQL version 8.4 and higher, the output uses a simplified *`major`*`.`*`minor`* format where the major version represents MySQL compatibility:

```
+------------------+------------------+
| aurora_version() | @@aurora_version |
+------------------+------------------+
| 8.4.7            | 8.4.7            |
+------------------+------------------+
```

Aurora PostgreSQL

The `version` function returns the community version of your database for Aurora PostgreSQL.

```
postgres=> select version();
```

Output example:

```
------------------------------------------------------------------------------
PostgreSQL 11.7 on x86_64-pc-linux-gnu, compiled by gcc (GCC) 4.9.3, 64-bit
(1 row)
```

And the `aurora_version` function returns the Aurora version:

```
postgres=> select aurora_version();
```

Output example:

```
aurora_version
----------------
3.2.2
```

For more information, see Checking Aurora MySQL versions using SQL and Identifying versions of Amazon Aurora PostgreSQL.

Default Amazon Aurora versions

The *default version* is the version that Aurora chooses automatically for database creation or upgrade when you don't manually specify a target engine version. For example, the following command shows the default engine version for Aurora PostgreSQL (sample output included).

```
aws rds describe-db-engine-versions \
    --engine aurora-postgresql \
    --default-only \
    --query 'DBEngineVersions[0].EngineVersion' \
    --output text

16.4
```

Every major version has a corresponding default minor version. Thus, the default minor version is 16.*n* for Aurora PostgreSQL 16, with version number *n* changing when Aurora releases new default minor versions. Typically, Aurora releases two default minor versions for every major version per year. The following bash shell script shows the default minor versions for a set of Aurora PostgreSQL major versions (sample output included).

```
for major in 16 15 14 13 12 11; do
```

```
  echo -n "Default for Aurora PostgreSQL major version $major: "
  aws rds describe-db-engine-versions \
    --engine aurora-postgresql \
    --engine-version "$major" \
    --default-only \
    --query 'DBEngineVersions[0].EngineVersion' \
    --output text
done

Default for Aurora PostgreSQL major version 16: 16.4
Default for Aurora PostgreSQL major version 15: 15.8
Default for Aurora PostgreSQL major version 14: 14.13
Default for Aurora PostgreSQL major version 13: 13.16
Default for Aurora PostgreSQL major version 12: 12.20
Default for Aurora PostgreSQL major version 11: 11.21
```

If you enable automatic minor version upgrades for your Aurora DB cluster, Aurora uses either the default minor version or a newer minor version for a given major version. For example, if the default minor version for Aurora PostgreSQL 15 is 15.8, and newer version 15.10 is also available, Aurora can automatically upgrade to either 15.8 or 15.10.

Amazon Aurora major versions

Aurora versions use the *major*.*minor*.*patch* scheme. An *Aurora major version* refers to the MySQL or PostgreSQL community major version that Aurora is compatible with. Aurora MySQL and Aurora PostgreSQL major versions are available under standard support at least until community end of life for the corresponding community version. You can continue to run a major version past its Aurora end of standard support date for a fee. For more information, see Amazon RDS Extended Support with Amazon Aurora and Amazon Aurora pricing.

For more information on major versions and the release calendar for Aurora MySQL and Aurora PostgreSQL, see the following pages in the respective Release Notes:

- Release calendar for Aurora MySQL major versions
- Release calendar for Aurora PostgreSQL major versions

You can also view information about support dates for major engine versions by running the describe-db-major-engine-versions Amazon CLI command or by using the DescribeDBMajorEngineVersions RDS API operation.

> **Note**
>
> Amazon RDS Extended Support for Aurora MySQL version 2 starts on November 1, 2024, but you won't be charged until December 1, 2024. Between November 1 and November 30, 2024, all Aurora MySQL version 2 DB clusters are covered under Amazon RDS Extended Support. For more information, see Amazon RDS Extended Support for selected Aurora versions.

How long Amazon Aurora major versions remain available

Amazon Aurora major versions remain available at least until community end of life for the corresponding community version. You can use Aurora end of standard support dates to plan your testing and upgrade cycles. These dates represent the earliest date that an upgrade to a newer version might be required. For more information on the dates, see Amazon Aurora major versions.

Before Aurora asks you to upgrade to a newer major version and to help you plan, Aurora typically provides a reminder 12 months in advance. The reminders communicate the following about the upgrade process.

- The timing of certain milestones
- The impact on your DB clusters
- Recommended actions

We recommend that you thoroughly test your applications with new database versions before upgrading your cluster to a new major version.

After the major version reaches the Aurora end of standard support, any DB cluster still running the earlier version is automatically upgraded to an Extended Support version during a scheduled maintenance window. Extended Support charges may apply. For more information on Amazon RDS Extended Support, see Using Amazon RDS Extended support.

Amazon Aurora minor versions

Aurora versions use the *major*.*minor*.*patch* scheme. An *Aurora minor version* provides incremental community and Aurora-specific improvements to the service, for example new features and fixes.

For more information on minor versions and the release calendar for Aurora MySQL and Aurora PostgreSQL, see the following pages in the respective Release Notes:

- Release calendar for Aurora MySQL minor versions
- Release calendar for Aurora PostgreSQL minor versions

The following sections describe details about the cadence and lifetime that you can expect for Aurora minor versions.

Topics

- How often Amazon Aurora minor versions are released
- How long Amazon Aurora minor versions remain available

How often Amazon Aurora minor versions are released

In general, Amazon Aurora minor versions are released quarterly. The release schedule might vary to pick up additional features or fixes.

How long Amazon Aurora minor versions remain available

Typically, Amazon Aurora makes every minor version of a particular major version available for at least 12 months. At the end of this period, Aurora might automatically upgrade your database to the default minor version or to a later version. Aurora begins the upgrade during the scheduled maintenance window for any DB cluster that is running the earlier minor version.

In some cases, Aurora might replace a minor version of a particular major version sooner than the usual 12-month period. Reasons can include critical security issues or the end-of-support date for a major version.

Before beginning automatic upgrades of minor versions that are approaching end of life, Aurora typically provides a reminder three months in advance. Aurora details the following about the upgrade process.

- The timing of certain milestones
- The impact on your DB clusters
- Recommended actions

Notifications with less than three months notice describe critical matters, such as security issues, that require quicker action.

If the **Auto minor version upgrade** setting is enabled, you get a reminder but no RDS event notification. Aurora upgrades your database within a maintenance window after the mandatory upgrade deadline has passed.

If the **Auto minor version upgrade** setting isn't enabled, you get a reminder and an Amazon RDS DB cluster event with a category of `maintenance` and ID of `RDS-EVENT-0156`. Aurora upgrades your database within the next maintenance window.

Note that after a minor version reaches the Aurora end of standard support, no further patch versions will be released for that minor version. To receive critical bug fixes or CVEs, you must upgrade to a minor version with standard support.

For more information about automatic minor version upgrades, see Automatic minor version upgrades for Aurora DB clusters.

Amazon Aurora patch versions

Aurora versions use the *major*.*minor*.*patch* scheme. An Aurora patch version includes important fixes added to a minor version after its initial release (for example, Aurora MySQL 3.04.0, 3.04.1, ..., 3.04.3). While each new minor version provides new Aurora features, new patch versions within a specific minor version are primarily used to resolve important issues.

For more information on patching, see Maintaining an Amazon Aurora DB cluster.

Upgrading Amazon Aurora DB clusters

With Amazon Aurora, you can control and test upgrades to your DB clusters. Amazon Aurora provides options for automatic minor version upgrades, manual upgrade control, required upgrades, and pre-upgrade testing. You can keep your clusters up-to-date with the latest minor version, deferring non-critical upgrades, forcing upgrades for serious issues, and validating upgrade behavior in nonproduction environments. The following sections detail how to manage and test Aurora DB cluster upgrades using these capabilities.

Automatic minor version upgrades for Aurora

Automatic minor version upgrades periodically update your database to recent database engine versions. However, the upgrade might not always include the latest database engine version. If you need to keep your databases on specific versions at particular times, we recommend that you

manually upgrade to the database versions that you need according to your required schedule. In cases of critical security issues or when a version reaches its end-of-support date, Amazon Aurora will apply a minor version upgrade even if you haven't enabled the **Auto minor version upgrade** option. For more information, see the upgrade documentation for your specific database engine.

See Upgrading the minor version or patch level of an Aurora MySQL DB cluster and Performing a minor version upgrade.

You can stay up to date with Aurora minor versions by turning on **Auto minor version upgrade** for every DB instance in the Aurora cluster. Aurora performs the automatic upgrade only if all DB instances in your cluster have this setting turned on.

If **Auto minor version upgrade** is **Yes** for your DB cluster, Aurora upgrades automatically to the default minor version or to a newer minor version. For example, if the default minor version is 15.8 for Aurora PostgreSQL 15, and version 15.10 exists, the target for the automatic upgrade could be either 15.8 or 15.10.

Aurora typically schedules automatic upgrades twice a year for DB clusters that have automatic minor version upgrade enabled. These upgrades occur during the maintenance window that you specify for your cluster. For more information, see Automatic minor version upgrades for Aurora DB clusters.

Automatic minor version upgrades are communicated in advance through an Amazon RDS DB cluster event with a category of `maintenance` and ID of `RDS-EVENT-0156`. For more information, see Amazon RDS event categories and event messages for Aurora.

Manually controlling upgrades of your DB clusters to new versions

If you have the **Auto minor version upgrade** setting enabled, Aurora automatically upgrades your DB cluster to the default minor version or a newer minor version. Aurora typically schedules automatic upgrades twice a year for DB clusters that have the **Auto minor version upgrade** setting enabled. These upgrades are started during customer-specified maintenance windows.

To turn off automatic minor version upgrades, disable **Auto minor version upgrade** on any DB instance within an Aurora cluster. Aurora performs an automatic minor version upgrade only if all DB instances in your cluster have the setting enabled.

> **Note**
>
> For mandatory upgrades such as minor-version end of life, Aurora upgrades the DB cluster even if the **Auto minor version upgrade** setting is disabled. You get a reminder but no RDS

event notification. Aurora upgrades your cluster occur within a maintenance window after the mandatory upgrade deadline has passed.

Because major version upgrades involve some compatibility risk, they don't occur automatically. You must initiate these, except if there is a major version deprecation. We recommend that you thoroughly test your applications with new database versions before upgrading your cluster to a major version.

For more information about upgrading a DB cluster to a new Aurora major version, see Upgrading Amazon Aurora MySQL DB clusters and Upgrading Amazon Aurora PostgreSQL DB clusters.

Required Amazon Aurora upgrades

For certain critical fixes, Aurora might perform a managed upgrade to a newer patch level within the same minor version. In this case, Aurora upgrades your cluster even if **Auto minor version upgrade** is turned off. Before doing so, Aurora communicates the detailed upgrade process. Details include the timing of certain milestones, the impact on your DB clusters, and recommended actions. Such managed upgrades occur automatically within the cluster maintenance window.

Testing your DB cluster with a new Aurora version before upgrading

You can test the upgrade process and how the new version works with your application and workload. Use one of the following methods:

- Clone your cluster using the Amazon Aurora fast database clone feature. Perform the upgrade and any post-upgrade testing on the new cluster.
- Restore from a cluster snapshot to create a new Aurora cluster. You can create a cluster snapshot yourself from an existing Aurora cluster. Aurora also automatically creates periodic snapshots for you for each of your clusters. You can then initiate a version upgrade for the new cluster. You can experiment on the upgraded copy of your cluster before deciding whether to upgrade your original cluster.

For more information on these ways to create new clusters for testing, see Cloning a volume for an Amazon Aurora DB cluster and Creating a DB cluster snapshot.

Amazon Aurora version support

If your Amazon Aurora DB has complex dependencies on specific database engine behavior, we recommend that you engage in extensive testing before you upgrade to newer database engine versions. There are long-term support options so that you can maintain your DB clusters on select Aurora engine versions even after they have been superseded by newer versions. The following sections explain the long-term support options for your Aurora DB clusters.

Long-term support for selected Amazon Aurora minor versions

For each Aurora major version, certain minor versions are designated as long-term-support (LTS) versions, and made available for at least three years. That is, at least one minor version per major version is made available for longer than the typical 12 months. Typically, Aurora reminds you six months before the end of this period. Aurora communicates the following about the upgrade process.

- The timing of certain milestones
- The impact on your DB clusters
- Recommended actions

Notifications with less than six months notice communicate critical matters, such as security issues, that necessitate quicker action.

LTS minor versions include only critical fixes (through patch versions). An LTS version doesn't include new features released after its introduction. Once a year, DB clusters running on an LTS minor version are patched to the latest patch version of the LTS release. Aurora patches your clusters so that you benefit from cumulative security and stability fixes. If there are critical fixes, Aurora might patch an LTS minor version more frequently, such as for security, that need to be applied.

> **Note**
>
> If you want to remain on an LTS minor version for the duration of its lifecycle, make sure to disable automatic minor version upgrade for your DB instances. To avoid automatically upgrading your DB cluster from the LTS minor version, clear the **Enable auto minor version upgrade** check box on any DB instance in your Aurora cluster.

For the version numbers of all Aurora LTS versions, see Aurora MySQL long-term support (LTS) releases and Using an Aurora PostgreSQL long-term support (LTS) release.

Amazon RDS Extended Support for selected Aurora versions

With Amazon RDS Extended Support, you can continue to run your database on a major engine version past the Aurora end of standard support date for an additional cost. During RDS Extended Support, Amazon RDS will supply patches for Critical and High CVEs as defined by the National Vulnerability Database (NVD) CVSS severity ratings. For more information, see Amazon RDS Extended Support with Amazon Aurora.


RDS Extended Support is only available on certain Aurora versions. For more information, see Amazon Aurora major versions.

Regions and Availability Zones

Amazon cloud computing resources are hosted in multiple locations world-wide. These locations are composed of Amazon Regions and Availability Zones. Each *Amazon Region* is a separate geographic area. Each Amazon Region has multiple, isolated locations known as *Availability Zones*.

> **Note**
>
> For information about finding the Availability Zones for an Amazon Region, see Describe your Availability Zones in the Amazon EC2 documentation.

Amazon operates state-of-the-art, highly-available data centers. Although rare, failures can occur that affect the availability of DB instances that are in the same location. If you host all your DB instances in one location that is affected by such a failure, none of your DB instances will be available.

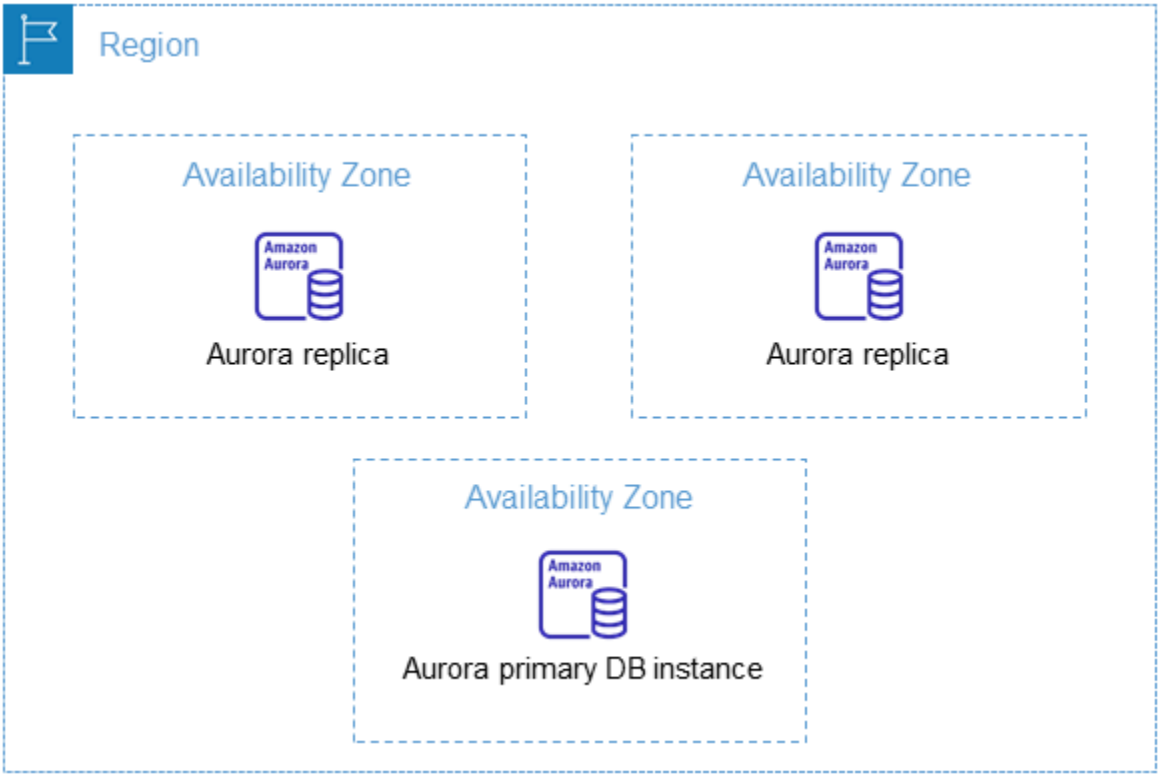

It is important to remember that each Amazon Region is completely independent. Any Amazon RDS activity you initiate (for example, creating database instances or listing available database instances) runs only in your current default Amazon Region. The default Amazon Region can be

changed in the console, or by setting the `AWS_DEFAULT_REGION` environment variable. Or it can be overridden by using the `--region` parameter with the Amazon Command Line Interface (Amazon CLI). For more information, see Configuring the Amazon Command Line Interface, specifically the sections about environment variables and command line options.

Amazon RDS supports special Amazon Regions called Amazon GovCloud (US). These are designed to allow US government agencies and customers to move more sensitive workloads into the cloud. The Amazon GovCloud (US) Regions address the US government's specific regulatory and compliance requirements. For more information, see What is Amazon GovCloud (US)?

To create or work with an Amazon RDS DB instance in a specific Amazon Region, use the corresponding regional service endpoint.

> **Note**
>
> Aurora doesn't support Local Zones.

Amazon Regions

Each Amazon Region is designed to be isolated from the other Amazon Regions. This design achieves the greatest possible fault tolerance and stability.

When you view your resources, you see only the resources that are tied to the Amazon Region that you specified. This is because Amazon Regions are isolated from each other, and we don't automatically replicate resources across Amazon Regions.

Region availability

When you work with an Aurora DB cluster using the command line interface or API operations, make sure that you specify its regional endpoint.

Topics

- Aurora MySQL Region availability
- Aurora PostgreSQL Region availability

Aurora MySQL Region availability

The following table shows the Amazon Regions where Aurora MySQL is currently available and the endpoint for each Region.

Region Name	Region	Endpoint	Protocol	
China (Beijing)	cn-north-1	rds.cn-north-1.amazonaws.com.cn	HTTPS	
China (Ningxia)	cn-northwest-1	rds.cn-northwest-1.amazonaws.com.cn	HTTPS	

Aurora PostgreSQL Region availability

The following table shows the Amazon Regions where Aurora PostgreSQL is currently available and the endpoint for each Region.

Region Name	Region	Endpoint	Protocol	
China (Beijing)	cn-north-1	rds.cn-north-1.amazonaws.com.cn	HTTPS	
China (Ningxia)	cn-northwest-1	rds.cn-northwest-1.amazonaws.com.cn	HTTPS	

Availability Zones

An Availability Zone is an isolated location in a given Amazon Web Services Region. Each Region has multiple Availability Zones (AZ) designed to provide high availability for the Region. An AZ is identified by the Amazon Region code followed by a letter identifier (for example, `us-east-1a`). If you create your VPC and subnets rather than using the default VPC, you define each subnet in a specific AZ. When you create an Aurora DB cluster, Aurora creates the primary instance in one of

the subnets in the VPC's DB subnet group. It thus associates that instance with a specific AZ chosen by Aurora.

Each Aurora DB cluster hosts copies of its storage in three separate AZs selected automatically by Aurora from the AZs in your DB subnet group. Every DB instance in the cluster must be in one of these three AZs.

When you create a DB instance in your cluster, Aurora automatically chooses an appropriate AZ for that instance if you don't specify an AZ.

Use the describe-availability-zones Amazon EC2 command as follows to describe the Availability Zones within the specified Region that are enabled for your account.

```
aws ec2 describe-availability-zones --region region-name
```

For example, to describe the Availability Zones within the US East (N. Virginia) Region (us-east-1) that are enabled for your account, run the following command:

```
aws ec2 describe-availability-zones --region us-east-1
```

To learn how to specify the AZ when you create a cluster or add instances to it, see Configure the network for the DB cluster.

Local time zone for Amazon Aurora DB clusters

By default, the time zone for an Amazon Aurora DB cluster is Universal Time Coordinated (UTC). You can set the time zone for instances in your DB cluster to the local time zone for your application instead.

To set the local time zone for a DB cluster, set the time zone parameter to one of the supported values. You set this parameter in the cluster parameter group for your DB cluster.

- For Aurora MySQL, the name of this parameter is `time_zone`. For information on best practices for setting the `time_zone` parameter, see Optimizing timestamp operations.
- For Aurora PostgreSQL, the name of this parameter is `timezone`.

When you set the time zone parameter for a DB cluster, all instances in the DB cluster change to use the new local time zone. In some cases, other Aurora DB clusters might be using the same

cluster parameter group. If so, all instances in those DB clusters change to use the new local time zone also. For information on cluster-level parameters, see Amazon Aurora DB cluster and DB instance parameters.

After you set the local time zone, all new connections to the database reflect the change. In some cases, you might have open connections to your database when you change the local time zone. If so, you don't see the local time zone update until after you close the connection and open a new connection.

If you are replicating across Amazon Regions, the replication source DB cluster and the replica use different parameter groups. Parameter groups are unique to an Amazon Region. To use the same local time zone for each instance, make sure to set the time zone parameter in the parameter groups for both the replication source and the replica.

When you restore a DB cluster from a DB cluster snapshot, the local time zone is set to UTC. You can update the time zone to your local time zone after the restore is complete. In some cases, you might restore a DB cluster to a point in time. If so, the local time zone for the restored DB cluster is the time zone setting from the parameter group of the restored DB cluster.

The following table lists some of the values to which you can set your local time zone. To list all of the available time zones, you can use the following SQL queries:

- Aurora MySQL: `select * from mysql.time_zone_name;`
- Aurora PostgreSQL: `select * from pg_timezone_names;`

> **Note**
>
> For some time zones, time values for certain date ranges can be reported incorrectly as noted in the table. For Australia time zones, the time zone abbreviation returned is an outdated value as noted in the table.

Time zone	Notes
`Africa/Harare`	This time zone setting can return incorrect values from 28 Feb 1903 21:49:40 GMT to 28 Feb 1903 21:55:48 GMT.
`Africa/Monrovia`	

Time zone	Notes
Africa/Nairobi	This time zone setting can return incorrect values from 31 Dec 1939 21:30:00 GMT to 31 Dec 1959 21:15:15 GMT.
Africa/Windhoek	
America/Bogota	This time zone setting can return incorrect values from 23 Nov 1914 04:56:16 GMT to 23 Nov 1914 04:56:20 GMT.
America/Caracas	
America/Chihuahua	
America/Cuiaba	
America/Denver	
America/Fortaleza	In some cases, for a DB cluster in the South America (Sao Paulo) Region, time doesn't show correctly for a recently changed Brazil time zone. If so, reset the DB cluster's time zone parameter to America/Fortaleza .
America/Guatemala	
America/Halifax	This time zone setting can return incorrect values from 27 Oct 1918 05:00:00 GMT to 31 Oct 1918 05:00:00 GMT.
America/Manaus	If your DB cluster is in the South America (Cuiaba) time zone and the expected time doesn't show correctly for the recently changed Brazil time zone, reset the DB cluster's time zone parameter to America/Manaus .
America/Matamoros	
America/Monterrey	

Time zone	Notes
America/Montevideo	
America/Noronha	
America/Phoenix	
America/Tijuana	
Asia/Ashgabat	
Asia/Baghdad	
Asia/Baku	
Asia/Bangkok	
Asia/Beirut	
Asia/Calcutta	
Asia/Kabul	
Asia/Karachi	
Asia/Kathmandu	
Asia/Muscat	This time zone setting can return incorrect values from 31 Dec 1919 20:05:36 GMT to 31 Dec 1919 20:05:40 GMT.
Asia/Riyadh	This time zone setting can return incorrect values from 13 Mar 1947 20:53:08 GMT to 31 Dec 1949 20:53:08 GMT.
Asia/Seoul	This time zone setting can return incorrect values from 30 Nov 1904 15:30:00 GMT to 07 Sep 1945 15:00:00 GMT.
Asia/Shanghai	This time zone setting can return incorrect values from 31 Dec 1927 15:54:08 GMT to 02 Jun 1940 16:00:00 GMT.

Time zone	Notes
Asia/Singapore	
Asia/Taipei	This time zone setting can return incorrect values from 30 Sep 1937 16:00:00 GMT to 29 Sep 1979 15:00:00 GMT.
Asia/Tehran	
Asia/Tokyo	This time zone setting can return incorrect values from 30 Sep 1937 15:00:00 GMT to 31 Dec 1937 15:00:00 GMT.
Asia/Ulaanbaatar	
Atlantic/Azores	This time zone setting can return incorrect values from 24 May 1911 01:54:32 GMT to 01 Jan 1912 01:54:32 GMT.
Australia/Adelaide	The abbreviation for this time zone is returned as CST instead of ACDT/ACST.
Australia/Brisbane	The abbreviation for this time zone is returned as EST instead of AEDT/AEST.
Australia/Darwin	The abbreviation for this time zone is returned as CST instead of ACDT/ACST.
Australia/Hobart	The abbreviation for this time zone is returned as EST instead of AEDT/AEST.
Australia/Perth	The abbreviation for this time zone is returned as WST instead of AWDT/AWST.
Australia/Sydney	The abbreviation for this time zone is returned as EST instead of AEDT/AEST.
Brazil/East	
Canada/Saskatchewan	This time zone setting can return incorrect values from 27 Oct 1918 08:00:00 GMT to 31 Oct 1918 08:00:00 GMT.

Time zone	Notes
Europe/Amsterdam	
Europe/Athens	
Europe/Dublin	
Europe/Helsinki	This time zone setting can return incorrect values from 30 Apr 1921 22:20:08 GMT to 30 Apr 1921 22:20:11 GMT.
Europe/Paris	
Europe/Prague	
Europe/Sarajevo	
Pacific/Auckland	
Pacific/Guam	
Pacific/Honolulu	This time zone setting can return incorrect values from 21 May 1933 11:30:00 GMT to 30 Sep 1945 11:30:00 GMT.
Pacific/Samoa	This time zone setting can return incorrect values from 01 Jan 1911 11:22:48 GMT to 01 Jan 1950 11:30:00 GMT.
US/Alaska	
US/Central	
US/Eastern	
US/East-Indiana	
US/Pacific	
UTC	

Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine

Aurora MySQL- and PostgreSQL-compatible database engines support several Amazon Aurora and Amazon RDS features and options. The support varies across specific versions of each database engine, and across Amazon Web Services Regions. To identify Aurora database engine version support and availability for a feature in a given Amazon Web Services Region, you can use the following sections.

Some of these features are Aurora-only capabilities. For example, Aurora Serverless, Aurora global databases, and support for integration with Amazon machine learning services aren't supported by Amazon RDS. Other features, such as Amazon RDS Proxy, are supported by both Amazon Aurora and Amazon RDS.

Supported Regions and DB engines

- Table conventions
- Supported Regions and Aurora DB engines for Blue/Green Deployments
- Supported Regions and Aurora DB engines for cluster storage configurations
- Supported Regions and Aurora DB engines for database activity streams
- Supported Regions and Aurora DB engines for exporting cluster data to Amazon S3
- Supported Regions and Aurora DB engines for exporting snapshot data to Amazon S3
- Supported Regions and DB engines for Aurora global databases
- Supported Regions and Aurora DB engines for IAM database authentication
- Supported Regions and Aurora DB engines for Kerberos authentication
- Supported Regions and DB engines for Aurora machine learning
- Supported Regions and Aurora DB engines for Database Insights
- Supported Regions and Aurora DB engines for zero-ETL integrations
- Supported Regions and Aurora DB engines for Amazon RDS Proxy
- Supported Regions and Aurora DB engines for Secrets Manager integration
- Supported Regions and Aurora DB engines for Aurora serverless
- Supported Regions and Aurora DB engines for RDS Data API
- Supported Regions and Aurora DB engines for zero-downtime patching (ZDP)
- Supported Regions and DB engines for Aurora engine-native features

Table conventions

The tables in the feature sections use the following patterns to specify version numbers and level of support:

- **Version x.y** – The specific version alone is supported.
- **Version x.y and higher** – The specified version and all higher minor versions of its major version are supported. For example, "version 10.11 and higher" means that versions 10.11, 10.11.1, and 10.12 are supported.

Supported Regions and Aurora DB engines for Blue/Green Deployments

A blue/green deployment copies a production database environment in a separate, synchronized staging environment. By using Amazon RDS Blue/Green Deployments, you can make changes to the database in the staging environment without affecting the production environment. For example, you can upgrade the major or minor DB engine version, change database parameters, or make schema changes in the staging environment. When you are ready, you can promote the staging environment to be the new production database environment. For more information, see Using Amazon Aurora Blue/Green Deployments for database updates.

Blue/Green Deployments with Aurora MySQL

The Blue/Green Deployments feature is available for all versions of Aurora MySQL in all Amazon Web Services Regions, including Aurora MySQL clusters configured as Aurora Global Database.

Blue/Green Deployments with Aurora PostgreSQL

The following Regions and engine versions are available for Blue/Green Deployments with Aurora PostgreSQL, including Aurora PostgreSQL clusters configured as Aurora Global Database.

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
All Amazon Web	Version 17.4 and higher	Version 16.1 and higher	Version 15.4 and higher	Version 14.9 and higher	Version 13.12	Version 12.16	Version 11.21

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Services Regions					and higher	and higher	and higher

Supported Regions and Aurora DB engines for cluster storage configurations

Amazon Aurora has two DB cluster storage configurations, Aurora I/O-Optimized and Aurora Standard. For more information, see Storage configurations for Amazon Aurora DB clusters.

Aurora I/O-Optimized

Aurora I/O-Optimized is available in all Amazon Web Services Regions for the following Amazon Aurora versions:

- Aurora MySQL version 3.03.1 and higher, and version 8.4.7 and higher
- Aurora PostgreSQL versions 17.4 and higher, 16.1 and higher, 15.2 and higher, 14.7 and higher, and 13.10 and higher

Aurora Standard

Aurora Standard is available in all Amazon Web Services Regions for all Aurora MySQL and Aurora PostgreSQL versions.

Supported Regions and Aurora DB engines for database activity streams

By using database activity streams in Aurora, you can monitor and set alarms for auditing activity in your Aurora database. For more information, see Monitoring Amazon Aurora with Database Activity Streams.

Database activity streams aren't supported for the following features:

- Aurora serverless

- Babelfish for Aurora PostgreSQL

Topics

- Database activity streams with Aurora MySQL
- Database activity streams with Aurora PostgreSQL

Database activity streams with Aurora MySQL

The following Regions and engine versions are available for database activity streams with Aurora MySQL.

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
US East (N. Virginia)	All available versions	All available versions	Aurora version 2.11 and higher
US East (Ohio)	All available versions	All available versions	Aurora version 2.11 and higher
US West (N. Californi a)	All available versions	All available versions	Aurora version 2.11 and higher
US West (Oregon)	All available versions	All available versions	Aurora version 2.11 and higher
Africa (Cape Town)	All available versions	All available versions	Aurora version 2.11 and higher
Asia Pacific (Hong Kong)	All available versions	All available versions	Aurora version 2.11 and higher
Asia Pacific (Hyderabad)	All available versions	All available versions	Aurora version 2.11 and higher
Asia Pacific (Jakarta)	All available versions	All available versions	Aurora version 2.11 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Asia Pacific (Malaysia)	Not available	Not available	Not available
Asia Pacific (Melbourne)	Not available	Not available	Not available
Asia Pacific (Mumbai)	All available versions	All available versions	Aurora version 2.11 and higher
Asia Pacific (New Zealand)	Not available	Not available	Not available
Asia Pacific (Osaka)	All available versions	All available versions	Aurora version 2.11 and higher
Asia Pacific (Seoul)	All available versions	All available versions	Aurora version 2.11 and higher
Asia Pacific (Singapore)	All available versions	All available versions	Aurora version 2.11 and higher
Asia Pacific (Sydney)	All available versions	All available versions	Aurora version 2.11 and higher
Asia Pacific (Taipei)	Not available	Not available	Not available
Asia Pacific (Thailand)	Not available	Not available	Not available
Asia Pacific (Tokyo)	All available versions	All available versions	Aurora version 2.11 and higher
Canada (Central)	All available versions	All available versions	Aurora version 2.11 and higher
Canada West (Calgary)	Not available	Not available	Not available
China (Beijing)	Not available	Not available	Not available

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
China (Ningxia)	Not available	Not available	Not available
Europe (Frankfurt)	All available versions	All available versions	Aurora version 2.11 and higher
Europe (Ireland)	All available versions	All available versions	Aurora version 2.11 and higher
Europe (London)	All available versions	All available versions	Aurora version 2.11 and higher
Europe (Milan)	All available versions	All available versions	Aurora version 2.11 and higher
Europe (Paris)	All available versions	All available versions	Aurora version 2.11 and higher
Europe (Spain)	All available versions	All available versions	Aurora version 2.11 and higher
Europe (Stockholm)	All available versions	All available versions	Aurora version 2.11 and higher
Europe (Zurich)	Not available	Not available	Not available
Israel (Tel Aviv)	Not available	Not available	Not available
Middle East (Bahrain)	All available versions	All available versions	Aurora version 2.11 and higher
Mexico (Central)	Not available	Not available	Not available
Middle East (UAE)	All available versions	All available versions	Aurora version 2.11 and higher
South America (São Paulo)	All available versions	All available versions	Aurora version 2.11 and higher

Database activity streams with Aurora PostgreSQL

The following Regions and engine versions are available for database activity streams with Aurora PostgreSQL.

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
US East (N. Virginia)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
US East (Ohio)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
US West (N. California)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
US West (Oregon)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Africa (Cape Town)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Asia Pacific (Hong Kong)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Asia Pacific (Hyderabad)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Asia Pacific (Jakarta)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Asia Pacific (Malaysia)	Not available	Not available	Not available	Not available	Not available	Not available	

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Melbourne)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Asia Pacific (Mumbai)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Asia Pacific (New Zealand)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Asia Pacific (Osaka)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Asia Pacific (Seoul)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Singapore)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Asia Pacific (Sydney)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Asia Pacific (Taipei)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Asia Pacific (Thailand)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Asia Pacific (Tokyo)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Canada (Central)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Canada West (Calgary)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
China (Beijing)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
China (Ningxia)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Europe (Frankfurt)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Europe (Ireland)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Europe (London)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Europe (Milan)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Europe (Paris)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Europe (Spain)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Europe (Stockholm)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Europe (Zurich)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Israel (Tel Aviv)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Mexico (Central)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Middle East (Bahrain)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher
Middle East (UAE)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
South America (São Paulo)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	All available versions	All available versions	All available versions	Version 11.9 and version 11.13 and higher

Supported Regions and Aurora DB engines for exporting cluster data to Amazon S3

You can export Aurora DB cluster data to an Amazon S3 bucket. After the data is exported, you can analyze the exported data directly through tools like Amazon Athena or Amazon Redshift Spectrum. For more information, see Exporting DB cluster data to Amazon S3.

Exporting cluster data to S3 is available in the following Amazon Web Services Regions:

- US East (N. Virginia)
- US East (Ohio)
- US West (N. California)
- US West (Oregon)
- Asia Pacific (Hong Kong)
- Asia Pacific (Hyderabad)
- Asia Pacific (Jakarta)
- Asia Pacific (Malaysia)
- Asia Pacific (Melbourne)
- Asia Pacific (Mumbai)
- Asia Pacific (New Zealand)
- Asia Pacific (Osaka)
- Asia Pacific (Seoul)
- Asia Pacific (Singapore)

- Asia Pacific (Sydney)
- Asia Pacific (Taipei)
- Asia Pacific (Thailand)
- Asia Pacific (Tokyo)
- Canada (Central)
- Canada West (Calgary)
- China (Ningxia)
- Europe (Frankfurt)
- Europe (Ireland)
- Europe (London)
- Europe (Paris)
- Europe (Spain)
- Europe (Stockholm)
- Europe (Zurich)
- Israel (Tel Aviv)
- Middle East (UAE)
- Mexico (Central)
- South America (São Paulo)

Topics

- Exporting cluster data to S3 with Aurora MySQL
- Exporting cluster data to S3 with Aurora PostgreSQL

Exporting cluster data to S3 with Aurora MySQL

All currently available Aurora MySQL engine versions support exporting DB cluster data to Amazon S3. For more information about versions, see *Release Notes for Aurora MySQL*.

Exporting cluster data to S3 with Aurora PostgreSQL

All currently available Aurora PostgreSQL engine versions support exporting DB cluster data to Amazon S3. For more information about versions, see the *Release Notes for Aurora PostgreSQL*.

Supported Regions and Aurora DB engines for exporting snapshot data to Amazon S3

You can export Aurora DB cluster snapshot data to an Amazon S3 bucket. You can export manual snapshots and automated system snapshots. After the data is exported, you can analyze the exported data directly through tools like Amazon Athena or Amazon Redshift Spectrum. For more information, see Exporting DB cluster snapshot data to Amazon S3.

Exporting snapshots to S3 is available in all Amazon Web Services Regions except the following:

- Asia Pacific (Malaysia)
- Asia Pacific (New Zealand)
- Asia Pacific (Taipei)
- Asia Pacific (Thailand)
- Mexico (Central)

Topics

- Exporting snapshot data to S3 with Aurora MySQL
- Exporting snapshot data to S3 with Aurora PostgreSQL

Exporting snapshot data to S3 with Aurora MySQL

All currently available Aurora MySQL engine versions support exporting DB cluster snapshot data to Amazon S3. For more information about versions, see *Release Notes for Aurora MySQL*.

Exporting snapshot data to S3 with Aurora PostgreSQL

All currently available Aurora PostgreSQL engine versions support exporting DB cluster snapshot data to Amazon S3. For more information about versions, see the *Release Notes for Aurora PostgreSQL*.

Supported Regions and DB engines for Aurora global databases

An *Aurora global database* is a single database that spans multiple Amazon Web Services Regions, enabling low-latency global reads and disaster recovery from any Region-wide outage. It provides built-in fault tolerance for your deployment because the DB instance relies not on a single Amazon

Web Services Region, but upon multiple Regions and different Availability Zones. For more information, see Using Amazon Aurora Global Database.

Topics

- Aurora global databases with Aurora MySQL
- Aurora global databases with Aurora PostgreSQL

Aurora global databases with Aurora MySQL

The following Regions and engine versions are available for Aurora global databases with Aurora MySQL.

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
US East (N. Virginia)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
US East (Ohio)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
US West (N. California)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
US West (Oregon)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Africa (Cape Town)	Version 3.01.0 and higher	All available versions	Version 2.07.1 and higher
Asia Pacific (Hong Kong)	Version 3.01.0 and higher	All available versions	Version 2.07.1 and higher
Asia Pacific (Hyderabad)	Version 3.02.0 and higher	All available versions	Version 2.11.2 and higher
Asia Pacific (Jakarta)	Version 3.01.0 and higher	All available versions	Version 2.07.6 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Asia Pacific (Malaysia)	Version 3.04.0 and higher	All available versions	Version 2.07.6 and higher
Asia Pacific (Melbourne)	Version 3.03.0 and higher	All available versions	Version 2.07.6 and higher
Asia Pacific (Mumbai)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Asia Pacific (New Zealand)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Asia Pacific (Osaka)	Version 3.01.0 and higher	All available versions	Version 2.07.3 and higher
Asia Pacific (Seoul)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Asia Pacific (Singapore)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Asia Pacific (Sydney)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Asia Pacific (Taipei)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Asia Pacific (Thailand)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Asia Pacific (Tokyo)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Canada (Central)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Canada West (Calgary)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
China (Beijing)	Version 3.01.0 and higher	All available versions	Version 2.07.2 and higher
China (Ningxia)	Version 3.01.0 and higher	All available versions	Version 2.07.2 and higher
Europe (Frankfurt)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Europe (Ireland)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Europe (London)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Europe (Milan)	Version 3.01.0 and higher	All available versions	Version 2.07.1 and higher
Europe (Paris)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Europe (Spain)	Version 3.02.0 and higher	All available versions	Version 2.07.6 and higher
Europe (Stockholm)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Europe (Zurich)	Version 3.02.0 and higher	All available versions	Version 2.07.6 and higher
Israel (Tel Aviv)	Version 3.02.0 and higher	All available versions	Version 2.07.6 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Mexico (Central)	Version 3.02.0 and higher	All available versions	Version 2.07.6 and higher
Middle East (Bahrain)	Version 3.01.0 and higher	All available versions	Version 2.07.1 and higher
Middle East (UAE)	Version 3.02.0 and higher	All available versions	Version 2.07.6 and higher
South America (São Paulo)	Version 3.01.0 and higher	All available versions	Version 2.07.1 and higher
Amazon GovCloud (US-East)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher
Amazon GovCloud (US-West)	Version 3.01.0 and higher	All available versions	Version 2.07.0 and higher

Aurora global databases with Aurora PostgreSQL

The following Regions and engine versions are available for Aurora global databases with Aurora PostgreSQL.

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
US East (N. Virginia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
US East (Ohio)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
US West (N. California)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
US West (Oregon)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Africa (Cape Town)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Hong Kong)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Hyderabad)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Jakarta)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Malaysia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Melbourne)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Mumbai)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (New Zealand)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Osaka)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Seoul)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Singapore)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Sydney)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Taipei)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Thailand)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Tokyo)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Canada (Central)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Canada West (Calgary)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
China (Beijing)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
China (Ningxia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Frankfurt)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Ireland)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Europe (London)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Milan)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Paris)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Spain)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Europe (Stockholm)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Zurich)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Israel (Tel Aviv)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Mexico (Central)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Middle East (Bahrain)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Middle East (UAE)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
South America (São Paulo)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Amazon GovCloud (US-East)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Amazon GovCloud (US-West)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Supported Regions and Aurora DB engines for IAM database authentication

With IAM database authentication in Aurora, you can authenticate to your DB cluster using Amazon Identity and Access Management (IAM) database authentication. With this authentication method, you don't need to use a password when you connect to a DB cluster. Instead, you use an authentication token. For more information, see IAM database authentication .

Topics

- IAM database authentication with Aurora MySQL
- IAM database authentication with Aurora PostgreSQL

IAM database authentication with Aurora MySQL

IAM database authentication with Aurora MySQL is available in all Regions for the following versions:

- Aurora MySQL 8.4 – All available versions
- Aurora MySQL 3 – All available versions
- Aurora MySQL 2 – All available versions

IAM database authentication with Aurora PostgreSQL

IAM database authentication with Aurora PostgreSQL is available in all Regions for the following engine versions:

- Aurora PostgreSQL 17 – All available versions
- Aurora PostgreSQL 16 – All available versions
- Aurora PostgreSQL 15 – All available versions
- Aurora PostgreSQL 14 – All available versions
- Aurora PostgreSQL 13 – All available versions
- Aurora PostgreSQL 12 – All available versions
- Aurora PostgreSQL 11 – All available versions

Supported Regions and Aurora DB engines for Kerberos authentication

By using Kerberos authentication with Aurora, you can support external authentication of database users using Kerberos and Microsoft Active Directory. Using Kerberos and Active Directory provides the benefits of single sign-on and centralized authentication of database users. Kerberos and Active Directory are available with Amazon Directory Service for Microsoft Active Directory, a feature of Amazon Directory Service. For more information, see Kerberos authentication.

Topics

- Kerberos authentication with Aurora MySQL
- Kerberos authentication with Aurora PostgreSQL
- Active Directory(AD) security groups with Aurora PostgreSQL

Kerberos authentication with Aurora MySQL

The following Regions and engine versions are available for Kerberos Authentication with Aurora MySQL.

Region	Aurora MySQL version 3	Aurora MySQL version 8.4
US East (N. Virginia)	Version 3.03.0 and higher	Version 8.4.7 and higher
US East (Ohio)	Version 3.03.0 and higher	Version 8.4.7 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4
US West (N. California)	Version 3.03.0 and higher	Version 8.4.7 and higher
US West (Oregon)	Version 3.03.0 and higher	Version 8.4.7 and higher
Africa (Cape Town)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Hong Kong)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Jakarta)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Malaysia)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Melbourne)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Mumbai)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (New Zealand)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Osaka)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Seoul)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Singapore)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Sydney)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Taipei)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Thailand)	Version 3.03.0 and higher	Version 8.4.7 and higher
Asia Pacific (Tokyo)	Version 3.03.0 and higher	Version 8.4.7 and higher
Canada (Central)	Version 3.03.0 and higher	Version 8.4.7 and higher
Canada West (Calgary)	Version 3.03.0 and higher	Version 8.4.7 and higher
China (Beijing)	Version 3.03.0 and higher	Version 8.4.7 and higher
China (Ningxia)	Version 3.03.0 and higher	Version 8.4.7 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4
Europe (Frankfurt)	Version 3.03.0 and higher	Version 8.4.7 and higher
Europe (Ireland)	Version 3.03.0 and higher	Version 8.4.7 and higher
Europe (London)	Version 3.03.0 and higher	Version 8.4.7 and higher
Europe (Milan)	Version 3.03.0 and higher	Version 8.4.7 and higher
Europe (Paris)	Version 3.03.0 and higher	Version 8.4.7 and higher
Europe (Spain)	Version 3.03.0 and higher	Version 8.4.7 and higher
Europe (Stockholm)	Version 3.03.0 and higher	Version 8.4.7 and higher
Europe (Zurich)	Version 3.03.0 and higher	Version 8.4.7 and higher
Israel (Tel Aviv)	Version 3.03.0 and higher	Version 8.4.7 and higher
Mexico (Central)	Version 3.03.0 and higher	Version 8.4.7 and higher
Middle East (Bahrain)	Version 3.03.0 and higher	Version 8.4.7 and higher
Middle East (UAE)	Version 3.03.0 and higher	Version 8.4.7 and higher
South America (São Paulo)	Version 3.03.0 and higher	Version 8.4.7 and higher
Amazon GovCloud (US-East)	Version 3.03.0 and higher	Version 8.4.7 and higher
Amazon GovCloud (US-West)	Version 3.03.0 and higher	Version 8.4.7 and higher

Kerberos authentication with Aurora PostgreSQL

The following Regions and engine versions are available for Kerberos Authentication with Aurora PostgreSQL.

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
US East (N. Virginia)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
US East (Ohio)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
US West (N. California)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
US West (Oregon)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Africa (Cape Town)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Hong Kong)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Hyderabad)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Jakarta)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
(Malaysia)							
Asia Pacific (Melbourne)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Mumbai)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (New Zealand)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Osaka)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Seoul)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Singapore)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Sydney)	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Taipei)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Thailand)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Tokyo)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Canada (Central)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Canada West (Calgary)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
China (Beijing)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
China (Ningxia)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Frankfurt)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Ireland)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (London)	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Europe (Milan)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Paris)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Spain)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Stockholm)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Zurich)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Israel (Tel Aviv)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Mexico (Central)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Middle East (Bahrain)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Middle East (UAE)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
South America (São Paulo)	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Amazon GovCloud (US-East)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Amazon GovCloud (US-West)	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Active Directory(AD) security groups with Aurora PostgreSQL

The following Regions and engine versions are available for ActiveDirectory with Aurora PostgreSQL.

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
US East (N. Virginia)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
US East (Ohio)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
US West (N. California)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
US West (Oregon)	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Africa (Cape Town)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Hong Kong)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Hyderabad)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Jakarta)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Malaysia)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Melbourne)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Mumbai)	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (New Zealand)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Osaka)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Seoul)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Singapore)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Sydney)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Taipei)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Thailand)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Tokyo)	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Canada (Central)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Canada West (Calgary)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
China (Beijing)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
China (Ningxia)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Frankfurt)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Ireland)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (London)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Milan)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Paris)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Spain)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Stockholm)	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Europe (Zurich)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Israel (Tel Aviv)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Mexico (Central)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Middle East (Bahrain)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Middle East (UAE)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
South America (São Paulo)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Amazon GovCloud (US-East)	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Amazon GovCloud (US-West)	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Supported Regions and DB engines for Aurora machine learning

By using Amazon Aurora machine learning, you can integrate your Aurora DB cluster with the following Amazon machine learning service.

SageMaker AI is a full-featured *machine learning* service. Data scientists use Amazon SageMaker AI to build, train, and test machine learning models for a variety of inference tasks, such as fraud detection. By using Aurora machine learning with SageMaker AI, database developers can invoke the SageMaker AI functionality in SQL code.

Not all Amazon Web Services Regions support all machine learning services. Only certain Amazon Web Services Regions support Aurora machine learning and thus provide access to these services from an Aurora DB cluster. The integration process for Aurora machine learning also differs by database engine. For more information, see Using Amazon Aurora machine learning.

Topics

- Aurora machine learning with Aurora MySQL
- Aurora machine learning with Aurora PostgreSQL

Aurora machine learning with Aurora MySQL

Aurora machine learning with Amazon SageMaker AI is supported for Aurora MySQL in the Amazon Web Services Regions listed in the table. In addition to having your version of Aurora MySQL available, the Amazon Web Services Region must also support the service that you want to use. For a list of Amazon Web Services Regions where Amazon SageMaker AI is available, see Amazon SageMaker AI endpoints and quotas in the *Amazon Web Services General Reference*.

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
US East (N. Virginia)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
US East (Ohio)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
US West (N. Californi a)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
US West (Oregon)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Africa (Cape Town)	Not available	Not available	Not available
Asia Pacific (Hong Kong)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Asia Pacific (Hyderabad)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Asia Pacific (Jakarta)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Asia Pacific (Malaysia)	Version 3.04.0 and higher	All available versions	Not available
Asia Pacific (Melbourne)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Asia Pacific (Mumbai)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Asia Pacific (New Zealand)	Not available	Not available	Not available
Asia Pacific (Osaka)	Version 3.01.0 and higher	All available versions	Version 2.07.3 and higher
Asia Pacific (Seoul)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Asia Pacific (Singapore)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Asia Pacific (Sydney)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Asia Pacific (Taipei)	Not available	Not available	Not available
Asia Pacific (Thailand)	Not available	Not available	Not available
Asia Pacific (Tokyo)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Canada (Central)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Canada West (Calgary)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
China (Beijing)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
China (Ningxia)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Europe (Frankfurt)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Europe (Ireland)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Europe (London)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Europe (Milan)	Not available	Not available	Not available
Europe (Paris)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Europe (Spain)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Europe (Stockholm)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Europe (Zurich)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Israel (Tel Aviv)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Mexico (Central)	Not available	Not available	Not available
Middle East (Bahrain)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Middle East (UAE)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
South America (São Paulo)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Amazon GovCloud (US-East)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher
Amazon GovCloud (US-West)	Version 3.01.0 and higher	All available versions	Version 2.07 and higher

Aurora machine learning with Aurora PostgreSQL

Aurora machine learning with Amazon SageMaker AI is supported for Aurora PostgreSQL in the Amazon Web Services Regions listed in the table. In addition to having your version of Aurora PostgreSQL available, the Amazon Web Services Region must also support the service that you want to use. For a list of Amazon Web Services Regions where Amazon SageMaker AI is available, see Amazon SageMaker AI endpoints and quotas in the *Amazon Web Services General Reference*.

The following Regions and engine versions are available for Aurora machine learning with Aurora PostgreSQL.

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
US East (N. Virginia)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
US East (Ohio)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
US West (N. California)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
US West (Oregon)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Africa (Cape Town)	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Asia Pacific (Hong Kong)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Hyderabad)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Jakarta)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Malaysia)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Melbourne)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Mumbai)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (New Zealand)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Osaka)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Seoul)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Singapore)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Sydney)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Taipei)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Thailand)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Asia Pacific (Tokyo)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Canada (Central)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Canada West (Calgary)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
China (Beijing)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
China (Ningxia)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Europe (Frankfurt)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Europe (Ireland)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Europe (London)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Europe (Milan)	Not available	Not available	Not available	Not available	Not available	Not available	Not available

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Europe (Paris)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Europe (Spain)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Europe (Stockholm)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Europe (Zurich)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Israel (Tel Aviv)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Mexico (Central)	Not available	Not available	Not available	Not available	Not available	Not available	Not available

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Middle East (Bahrain)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Middle East (UAE)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
South America (São Paulo)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Amazon GovCloud (US-East)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher
Amazon GovCloud (US-West)	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.3 and higher	Version 12.4 and higher	Version 11.9, 11.12 and higher

Supported Regions and Aurora DB engines for Database Insights

Database Insights expands on existing Amazon RDS monitoring features to illustrate and help you analyze your database performance. With the Database Insights dashboard, you can visualize the database load on your Amazon RDS DB instance load and filter the load by waits, SQL statements, hosts, or users. For more information, see Overview of Database Insights on Amazon Aurora.

For the region, DB engine, and instance class support information for Database Insights features, see Database Insights.

Topics

- Database Insights with Aurora MySQL
- Database Insights with Aurora PostgreSQL
- Database Insights with Aurora Serverless

Database Insights with Aurora MySQL

> **Note**
>
> Engine version support is different for Database Insights with Aurora MySQL if you have parallel query turned on. For more information on parallel query, see Parallel query for Amazon Aurora MySQL.

Topics

- Database Insights with Aurora MySQL and parallel query turned off
- Database Insights with Aurora MySQL and parallel query turned on

Database Insights with Aurora MySQL and parallel query turned off

The following Regions and engine versions are available for Performance Insights with Aurora MySQL and parallel query turned off.

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
US East (N. Virginia)	All versions	All versions	All versions
US East (Ohio)	All versions	All versions	All versions
US West (N. California)	All versions	All versions	All versions
US West (Oregon)	All versions	All versions	All versions
Africa (Cape Town)	All versions	All versions	All versions
Asia Pacific (Hong Kong)	All versions	All versions	All versions
Asia Pacific (Hyderabad)	All versions	All versions	All versions
Asia Pacific (Jakarta)	All versions	All versions	All versions
Asia Pacific (Malaysia)	All versions	All versions	All versions
Asia Pacific (Melbourne)	All versions	All versions	All versions
Asia Pacific (Mumbai)	All versions	All versions	All versions
Asia Pacific (New Zealand)	All versions	All versions	All versions
Asia Pacific (Osaka)	All versions	All versions	All versions
Asia Pacific (Seoul)	All versions	All versions	All versions
Asia Pacific (Singapore)	All versions	All versions	All versions
Asia Pacific (Sydney)	All versions	All versions	All versions

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Asia Pacific (Taipei)	All versions	All versions	All versions
Asia Pacific (Thailand)	All versions	All versions	All versions
Asia Pacific (Tokyo)	All versions	All versions	All versions
Canada (Central)	All versions	All versions	All versions
Canada West (Calgary)	All versions	All versions	All versions
China (Beijing)	All versions	All versions	All versions
China (Ningxia)	All versions	All versions	All versions
Europe (Frankfurt)	All versions	All versions	All versions
Europe (Ireland)	All versions	All versions	All versions
Europe (London)	All versions	All versions	All versions
Europe (Milan)	All versions	All versions	All versions
Europe (Paris)	All versions	All versions	All versions
Europe (Spain)	All versions	All versions	All versions
Europe (Stockholm)	All versions	All versions	All versions
Europe (Zurich)	All versions	All versions	All versions
Israel (Tel Aviv)	All versions	All versions	All versions
Mexico (Central)	All versions	All versions	All versions
Middle East (Bahrain)	All versions	All versions	All versions
Middle East (UAE)	All versions	All versions	All versions

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
South America (São Paulo)	All versions	All versions	All versions
Amazon GovCloud (US-East)	All versions	All versions	All versions
Amazon GovCloud (US-West)	All versions	All versions	All versions

Database Insights with Aurora MySQL and parallel query turned on

The following Regions and engine versions are available for Performance Insights with Aurora MySQL and parallel query turned on.

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
US East (N. Virginia)	Not available	Not available	Version 2.09.0 and higher
US East (Ohio)	Not available	Not available	Version 2.09.0 and higher
US West (N. Californi a)	Not available	Not available	Version 2.09.0 and higher
US West (Oregon)	Not available	Not available	Version 2.09.0 and higher
Africa (Cape Town)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Hong Kong)	Not available	Not available	Version 2.09.0 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Asia Pacific (Hyderabad)	Not available	Not available	All versions
Asia Pacific (Jakarta)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Malaysia)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Melbourne)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Mumbai)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (New Zealand)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Osaka)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Seoul)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Singapore)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Sydney)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Taipei)	Not available	Not available	Version 2.09.0 and higher
Asia Pacific (Thailand)	Not available	Not available	Version 2.09.0 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Asia Pacific (Tokyo)	Not available	Not available	Version 2.09.0 and higher
Canada (Central)	Not available	Not available	Version 2.09.0 and higher
Canada West (Calgary)	Not available	Not available	Version 2.09.0 and higher
China (Beijing)	Not available	Not available	Version 2.09.0 and higher
China (Ningxia)	Not available	Not available	Version 2.09.0 and higher
Europe (Frankfurt)	Not available	Not available	Version 2.09.0 and higher
Europe (Ireland)	Not available	Not available	Version 2.09.0 and higher
Europe (London)	Not available	Not available	Version 2.09.0 and higher
Europe (Milan)	Not available	Not available	Version 2.09.0 and higher
Europe (Paris)	Not available	Not available	Version 2.09.0 and higher
Europe (Spain)	Not available	Not available	Version 2.09.0 and higher
Europe (Stockholm)	Not available	Not available	Version 2.09.0 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Europe (Zurich)	Not available	Not available	Version 2.09.0 and higher
Israel (Tel Aviv)	Not available	Not available	Version 2.09.0 and higher
Mexico (Central)	Not available	Not available	Version 2.09.0 and higher
Middle East (Bahrain)	Not available	Not available	Version 2.09.0 and higher
Middle East (UAE)	Not available	Not available	Version 2.09.0 and higher
South America (São Paulo)	Not available	Not available	Version 2.09.0 and higher
Amazon GovCloud (US-East)	Not available	Not available	Version 2.09.0 and higher
Amazon GovCloud (US-West)	Not available	Not available	Version 2.09.0 and higher

Database Insights with Aurora PostgreSQL

The following Regions and engine versions are available for Database Insights with Aurora PostgreSQL.

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11	Aurora PostgreSQL 10
US East (N.	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11	Aurora PostgreSQL 10
Virginia)								
US East (Ohio)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
US West (N. California)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
US West (Oregon)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Africa (Cape Town)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Hong Kong)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Hyderabad)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Jakarta)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11	Aurora PostgreSQL 10
Asia Pacific (Malaysia)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Melbourne)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Mumbai)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (New Zealand)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Osaka)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Seoul)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Singapore)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11	Aurora PostgreSQL 10
Asia Pacific (Sydney)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Taipei)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Thailand)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Asia Pacific (Tokyo)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Canada (Central)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Canada West (Calgary)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
China (Beijing)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
China (Ningxia)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Frankfurt)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11	Aurora PostgreSQL 10
Europe (Ireland)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (London)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Milan)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Paris)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Spain)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Stockholm)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Europe (Zurich)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Israel (Tel Aviv)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Mexico (Central)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Middle East (Bahrain)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Region	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11	Aurora PostgreSQL 10
Middle East (UAE)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
South America (São Paulo)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Amazon GovCloud (US-East)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions
Amazon GovCloud (US-West)	All versions	All versions	All versions	All versions	All versions	All versions	All versions	All versions

Database Insights with Aurora Serverless

Aurora serverless supports Database Insights for all MySQL-compatible and PostgreSQL-compatible versions. We recommend that you set the minimum capacity to at least 2 Aurora capacity units (ACUs).

Supported Regions and Aurora DB engines for zero-ETL integrations

Amazon Aurora zero-ETL integrations is a fully managed solution for making transactional data available in Amazon Redshift or Amazon SageMaker after it's written to an Aurora cluster. For more information, see *Zero-ETL integrations*.

Topics

- Aurora MySQL zero-ETL integrations

- Aurora PostgreSQL zero-ETL integrations

Aurora MySQL zero-ETL integrations

The following Regions and engine versions are available for Aurora MySQL zero-ETL integrations with Amazon Redshift and Amazon SageMaker.

Region	Zero-ETL integration with Amazon Redshift for Aurora MySQL version 3	Zero-ETL integration with Amazon SageMaker for Aurora MySQL version 3
US East (N. Virginia)	Version 3.05.2 and higher	Version 3.05.2 and higher
US East (Ohio)	Version 3.05.2 and higher	Version 3.05.2 and higher
US West (N. California)	Version 3.05.2 and higher	Not available
US West (Oregon)	Version 3.05.2 and higher	Version 3.05.2 and higher
Africa (Cape Town)	Version 3.05.2 and higher	Not available
Asia Pacific (Hong Kong)	Version 3.05.2 and higher	Version 3.05.2 and higher
Asia Pacific (Hyderabad)	Version 3.05.2 and higher	Not available
Asia Pacific (Jakarta)	Version 3.05.2 and higher	Not available
Asia Pacific (Malaysia)	Not available	Not available
Asia Pacific (Melbourne)	Version 3.05.2 and higher	Not available
Asia Pacific (Mumbai)	Version 3.05.2 and higher	Not available
Asia Pacific (New Zealand)	Not available	Not available
Asia Pacific (Osaka)	Version 3.05.2 and higher	Not available
Asia Pacific (Seoul)	Version 3.05.2 and higher	Version 3.05.2 and higher
Asia Pacific (Singapore)	Version 3.05.2 and higher	Version 3.05.2 and higher

Region	Zero-ETL integration with Amazon Redshift for Aurora MySQL version 3	Zero-ETL integration with Amazon SageMaker for Aurora MySQL version 3
Asia Pacific (Sydney)	Version 3.05.2 and higher	Version 3.05.2 and higher
Asia Pacific (Taipei)	Not available	Not available
Asia Pacific (Thailand)	Not available	Not available
Asia Pacific (Tokyo)	Version 3.05.2 and higher	Version 3.05.2 and higher
Canada (Central)	Version 3.05.2 and higher	Version 3.05.2 and higher
Canada West (Calgary)	Version 3.05.2 and higher	Not available
China (Beijing)	Version 3.05.2 and higher	Not available
China (Ningxia)	Version 3.05.2 and higher	Not available
Europe (Frankfurt)	Version 3.05.2 and higher	Version 3.05.2 and higher
Europe (Ireland)	Version 3.05.2 and higher	Version 3.05.2 and higher
Europe (London)	Version 3.05.2 and higher	Version 3.05.2 and higher
Europe (Milan)	Version 3.05.2 and higher	Not available
Europe (Paris)	Version 3.05.2 and higher	Not available
Europe (Spain)	Version 3.05.2 and higher	Not available
Europe (Stockholm)	Version 3.05.2 and higher	Version 3.05.2 and higher
Europe (Zurich)	Version 3.05.2 and higher	Not available
Israel (Tel Aviv)	Version 3.05.2 and higher	Not available
Mexico (Central)	Not available	Not available
Middle East (Bahrain)	Version 3.05.2 and higher	Not available

Region	Zero-ETL integration with Amazon Redshift for Aurora MySQL version 3	Zero-ETL integration with Amazon SageMaker for Aurora MySQL version 3
Middle East (UAE)	Version 3.05.2 and higher	Not available
South America (São Paulo)	Version 3.05.2 and higher	Version 3.05.2 and higher
Amazon GovCloud (US-East)	Not available	Not available
Amazon GovCloud (US-West)	Not available	Not available

Aurora PostgreSQL zero-ETL integrations

The following Regions and engine versions are available for Aurora PostgreSQL zero-ETL integrations with Amazon Redshift and Amazon Sagemaker.

Region	Zero-ETL integration with Amazon Redshift	Zero-ETL integration with Amazon SageMaker
US East (Ohio)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
US East (N. Virginia)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
US West (N. California)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
US West (Oregon)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher

Region	Zero-ETL integration with Amazon Redshift	Zero-ETL integration with Amazon SageMaker
Africa (Cape Town)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Asia Pacific (Hong Kong)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Asia Pacific (Hyderabad)	Version 17.4 and higher, Version 18.3 and higher	Version 17.4 and higher, Version 18.3 and higher
Asia Pacific (Jakarta)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Asia Pacific (Melbourne)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Asia Pacific (Malaysia)	Not available	Not available
Asia Pacific (Mumbai)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Asia Pacific (New Zealand)	Not available	Not available
Asia Pacific (Osaka)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Asia Pacific (Seoul)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher

Region	Zero-ETL integration with Amazon Redshift	Zero-ETL integration with Amazon SageMaker
Asia Pacific (Singapore)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Asia Pacific (Sydney)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Asia Pacific (Taipei)	Not available	Not available
Asia Pacific (Thailand)	Not available	Not available
Asia Pacific (Tokyo)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Canada (Central)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Canada West (Calgary)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
China (Beijing)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
China (Ningxia)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available

Region	Zero-ETL integration with Amazon Redshift	Zero-ETL integration with Amazon SageMaker
Europe (Frankfurt)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Europe (Ireland)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Europe (London)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Europe (Milan)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Europe (Paris)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Europe (Spain)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Europe (Stockholm)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Europe (Zurich)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Israel (Tel Aviv)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available

Region	Zero-ETL integration with Amazon Redshift	Zero-ETL integration with Amazon SageMaker
Mexico (Central)	Not available	Not available
Middle East (Bahrain)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
Middle East (UAE)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Not available
South America (São Paulo)	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher	Version 16.4 and higher, Version 17.4 and higher, Version 18.3 and higher
Amazon GovCloud (US-East)	Not available	Not available
Amazon GovCloud (US-West)	Not available	Not available

Supported Regions and Aurora DB engines for Amazon RDS Proxy

Amazon RDS Proxy is a fully managed, highly available database proxy that makes applications more scalable by pooling and sharing established database connections. For more information about RDS Proxy, see Amazon RDS Proxy for Aurora.

Topics

- Amazon RDS Proxy with Aurora MySQL
- Amazon RDS Proxy with Aurora PostgreSQL

Amazon RDS Proxy with Aurora MySQL

The following Regions and engine versions are available for RDS Proxy with Aurora MySQL.

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
US East (N. Virginia)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
US East (Ohio)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
US West (N. Californi a)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
US West (Oregon)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Africa (Cape Town)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (Hong Kong)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (Hyderabad)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (Jakarta)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Asia Pacific (Malaysia)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (Melbourne)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (Mumbai)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (New Zealand)	Not available	Not available	Not available
Asia Pacific (Osaka)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (Seoul)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (Singapore)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (Sydney)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Asia Pacific (Taipei)	Not available	Not available	Not available
Asia Pacific (Thailand)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Asia Pacific (Tokyo)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Canada (Central)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Canada West (Calgary)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
China (Beijing)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
China (Ningxia)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Europe (Frankfurt)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Europe (Ireland)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Europe (London)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Europe (Milan)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Europe (Paris)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Europe (Spain)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Europe (Stockholm)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Europe (Zurich)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Israel (Tel Aviv)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Mexico (Central)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Middle East (Bahrain)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Middle East (UAE)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
South America (São Paulo)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4	Aurora MySQL version 2
Amazon GovCloud (US-East)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher
Amazon GovCloud (US-West)	Version 3.01.0 and higher	All available versions	Version 2.07 and version 2.11 and higher

Amazon RDS Proxy with Aurora PostgreSQL

The following Regions and engine versions are available for RDS Proxy with Aurora PostgreSQL.

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
US East (N. Virginia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
US East (Ohio)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
US West	Version 18.3	Version 17.4	Version 16.1	Version 15.2	Version 14.3	Version 13.4	Version 12.8	Version 11.9

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
(N. California)	and higher	and higher	and higher	and higher	and higher	and higher	and higher	and version 11.13 and higher
US West (Oregon)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Africa (Cape Town)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Hong Kong)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Hyderabad)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Jakarta)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Malaysia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Melbourne)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Mumbai)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (New Zealand)	Not available	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Asia Pacific (Osaka)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Seoul)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Singapore)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Sydney)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Asia Pacific (Taipei)	Not available	Not available	Not available	Not available	Not available	Not available	Not available	Not available
Asia Pacific (Thailand)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Asia Pacific (Tokyo)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Canada (Central)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Canada West (Calgary)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
China (Beijing)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
China (Ningxia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Frankfurt)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Ireland)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (London)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Europe (Milan)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Paris)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Spain)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Europe (Stockholm)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Europe (Zurich)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Israel (Tel Aviv)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Mexico (Central)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Middle East (Bahrain)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13	Aurora PostgreSQL 12	Aurora PostgreSQL 11
Middle East (UAE)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
South America (São Paulo)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Amazon GovCloud (US-East)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher
Amazon GovCloud (US-West)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.4 and higher	Version 12.8 and higher	Version 11.9 and version 11.13 and higher

Supported Regions and Aurora DB engines for Secrets Manager integration

With Amazon Secrets Manager, you can replace hard-coded credentials in your code, including database passwords, with an API call to Secrets Manager to retrieve the secret programmatically. For more information about Secrets Manager, see Amazon Secrets Manager User Guide.

You can specify that Amazon Aurora manages the master user password in Secrets Manager for an Aurora DB cluster. Aurora generates the password, stores it in Secrets Manager, and rotates it regularly. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager.

Secrets Manager integration is available in all Amazon Web Services Regions.

Supported Regions and Aurora DB engines for Aurora serverless

Aurora serverless is an on-demand, auto-scaling feature designed to be a cost-effective approach to running intermittent or unpredictable workloads on Amazon Aurora. It automatically scales capacity up or down as needed by your applications. With Aurora serverless, each cluster can contain a writer DB instance and multiple reader DB instances. You can combine Aurora serverless and traditional provisioned DB instances within the same cluster. For more information, see Using Aurora serverless.

Topics

- Aurora serverless with Aurora MySQL
- Aurora serverless with Aurora PostgreSQL

Aurora serverless with Aurora MySQL

The following Regions and engine versions are available for Aurora serverless with Aurora MySQL.

Region	Aurora MySQL version 3	Aurora MySQL version 8.4
US East (N. Virginia)	Version 3.02.0 and higher	All available versions
US East (Ohio)	Version 3.02.0 and higher	All available versions
US West (N. California)	Version 3.02.0 and higher	All available versions

Region	Aurora MySQL version 3	Aurora MySQL version 8.4
US West (Oregon)	Version 3.02.0 and higher	All available versions
Africa (Cape Town)	Version 3.02.0 and higher	All available versions
Asia Pacific (Hong Kong)	Version 3.02.0 and higher	All available versions
Asia Pacific (Hyderabad)	Version 3.02.3 and higher	All available versions
Asia Pacific (Jakarta)	Version 3.02.0 and higher	All available versions
Asia Pacific (Malaysia)	Versions 3.04.3, 3.05.2, 3.06.1, 3.07.1, and higher	Versions 3.04.3, 3.05.2, 3.06.1, 3.07.1, and higher
Asia Pacific (Melbourne)	Version 3.02.3 and higher	All available versions
Asia Pacific (Mumbai)	Version 3.02.0 and higher	All available versions
Asia Pacific (New Zealand)	Versions 3.04.3 and higher, 3.08.0 and higher	Versions 3.04.3 and higher, 3.08.0 and higher
Asia Pacific (Osaka)	Version 3.02.0 and higher	All available versions
Asia Pacific (Seoul)	Version 3.02.0 and higher	All available versions
Asia Pacific (Singapore)	Version 3.02.0 and higher	All available versions
Asia Pacific (Sydney)	Version 3.02.0 and higher	All available versions
Asia Pacific (Taipei)	Versions 3.04.3 and higher, 3.08.1 and higher	Versions 3.04.3 and higher, 3.08.1 and higher
Asia Pacific (Thailand)	Versions 3.04.3 and higher, 3.08.0 and higher	Versions 3.04.3 and higher, 3.08.0 and higher
Asia Pacific (Tokyo)	Version 3.02.0 and higher	All available versions
Canada (Central)	Version 3.02.0 and higher	All available versions
Canada West (Calgary)	Version 3.04.0 and higher	All available versions

Region	Aurora MySQL version 3	Aurora MySQL version 8.4
China (Beijing)	Version 3.02.2 and higher	All available versions
China (Ningxia)	Version 3.02.2 and higher	All available versions
Europe (Frankfurt)	Version 3.02.0 and higher	All available versions
Europe (Ireland)	Version 3.02.0 and higher	All available versions
Europe (London)	Version 3.02.0 and higher	All available versions
Europe (Milan)	Version 3.02.0 and higher	All available versions
Europe (Paris)	Version 3.02.0 and higher	All available versions
Europe (Spain)	Version 3.02.3 and higher	All available versions
Europe (Stockholm)	Version 3.02.0 and higher	All available versions
Europe (Zurich)	Version 3.02.3 and higher	All available versions
Israel (Tel Aviv)	Versions 3.02.3 and higher, 3.03.1 and higher	Versions 3.02.3 and higher, 3.03.1 and higher
Mexico (Central)	Versions 3.04.3 and higher, 3.08.0 and higher	Versions 3.04.3 and higher, 3.08.0 and higher
Middle East (Bahrain)	Version 3.02.0 and higher	All available versions
Middle East (UAE)	Version 3.02.3 and higher	All available versions
South America (São Paulo)	Version 3.02.0 and higher	All available versions
Amazon GovCloud (US-East)	Version 3.02.2 and higher	All available versions
Amazon GovCloud (US-West)	Version 3.02.2 and higher	All available versions

The upper and lower ACU limits for Aurora serverless capacity might vary depending on your engine version. For details, see Aurora serverless capacity.

Aurora serverless with Aurora PostgreSQL

The following Regions and engine versions are available for Aurora serverless with Aurora PostgreSQL.

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
US East (N. Virginia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
US East (Ohio)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
US West (N. California)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
US West (Oregon)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Africa (Cape Town)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Asia Pacific (Hong Kong)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Asia Pacific (Hyderabad)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.6 and higher	Version 13.9 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
Asia Pacific (Jakarta)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Asia Pacific (Malaysia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.4 and higher	Version 14.6, 14.9 and higher	Version 13.9, 13.12 and higher
Asia Pacific (Melbourne)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.6 and higher	Version 13.9 and higher
Asia Pacific (Mumbai)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Asia Pacific (New Zealand)	Version 18.3 and higher	Version 17.4 and higher	Version 16.8 and higher	Version 15.12 and higher	Version 14.17 and higher	Version 13.20 and higher
Asia Pacific (Osaka)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Asia Pacific (Seoul)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Asia Pacific (Singapore)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Asia Pacific (Taipei)	Version 18.3 and higher	Version 17.4 and higher	Version 16.6 and higher	Version 15.10 and higher	Version 14.15 and higher	Not available

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
Asia Pacific (Sydney)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Asia Pacific (Thailand)	Version 18.3 and higher	Version 17.4 and higher	Version 16.4 and higher	Version 15.8 and higher	Version 14.13 and higher	Not available
Asia Pacific (Tokyo)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Canada (Central)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Canada West (Calgary)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.6, 14.8 and higher	Version 13.9, 13.11 and higher
China (Beijing)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
China (Ningxia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Europe (Frankfurt)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Europe (Ireland)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
Europe (London)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Europe (Milan)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Europe (Paris)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Europe (Spain)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.6 and higher	Version 13.9 and higher
Europe (Stockholm)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Europe (Zurich)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.6 and higher	Version 13.9 and higher
Israel (Tel Aviv)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.6 and higher	Version 13.9 and higher
Mexico (Central)	Version 18.3 and higher	Version 17.4 and higher	Version 16.4 and higher	Version 15.8 and higher	Version 14.13 and higher	Not available
Middle East (Bahrain)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
Middle East (UAE)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.6 and higher	Version 13.9 and higher
South America (São Paulo)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Amazon GovCloud (US-East)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher
Amazon GovCloud (US-West)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.2 and higher	Version 14.3 and higher	Version 13.6 and higher

The upper and lower ACU limits for Aurora serverless capacity might vary depending on your engine version. For details, see Aurora serverless capacity.

Supported Regions and Aurora DB engines for RDS Data API

RDS Data API (Data API) provides a web-services interface to an Amazon Aurora DB cluster. Instead of managing database connections from client applications, you can run SQL commands against an HTTPS endpoint. For more information, see Using the Amazon RDS Data API.

Topics

- Data API with Aurora PostgreSQL Aurora serverless and provisioned
- Data API with Aurora MySQL Aurora serverless and provisioned

Data API with Aurora PostgreSQL Aurora serverless and provisioned

The following Regions and engine versions are available for Data API with Aurora PostgreSQL Aurora serverless and provisioned DB clusters.

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
US East (N. Virginia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
US East (Ohio)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
US West (N. California)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
US West (Oregon)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Africa (Cape Town)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Hong Kong)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Hyderabad)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Jakarta)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
Asia Pacific (Malaysia)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Melbourne)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Mumbai)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (New Zealand)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Osaka)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Seoul)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Singapore)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Sydney)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Taipei)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
Asia Pacific (Thailand)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Asia Pacific (Tokyo)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Canada (Central)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Canada West (Calgary)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
China (Beijing)	Not available	Not available	Not available	Not available	Not available	Not available
China (Ningxia)	Not available	Not available	Not available	Not available	Not available	Not available
Europe (Frankfurt)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Europe (Ireland)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Europe (London)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
Europe (Milan)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Europe (Paris)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Europe (Spain)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Europe (Stockholm)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Europe (Zurich)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Israel (Tel Aviv)	Not available	Not available	Not available	Not available	Not available	Not available
Middle East (Bahrain)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Mexico (Central)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Middle East (UAE)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher

Region	Aurora PostgreSQL 18	Aurora PostgreSQL 17	Aurora PostgreSQL 16	Aurora PostgreSQL 15	Aurora PostgreSQL 14	Aurora PostgreSQL 13
South America (São Paulo)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Amazon GovCloud (US-East)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher
Amazon GovCloud (US-West)	Version 18.3 and higher	Version 17.4 and higher	Version 16.1 and higher	Version 15.3 and higher	Version 14.8 and higher	Version 13.11 and higher

Data API with Aurora MySQL Aurora serverless and provisioned

The following Regions and engine versions are available for Data API with Aurora MySQL Aurora serverless and provisioned DB clusters.

Region	Aurora MySQL version 3	Aurora MySQL version 8.4
US East (Ohio)	Version 3.07 and higher	Version 8.4.7 and higher
US East (N. Virginia)	Version 3.07 and higher	Version 8.4.7 and higher
US West (N. California)	Version 3.07 and higher	Version 8.4.7 and higher
US West (Oregon)	Version 3.07 and higher	Version 8.4.7 and higher
Africa (Cape Town)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Hong Kong)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Hyderabad)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Jakarta)	Version 3.07 and higher	Version 8.4.7 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4
Asia Pacific (Malaysia)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Melbourne)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Mumbai)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (New Zealand)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Osaka)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Seoul)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Singapore)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Sydney)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Taipei)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Thailand)	Version 3.07 and higher	Version 8.4.7 and higher
Asia Pacific (Tokyo)	Version 3.07 and higher	Version 8.4.7 and higher
Canada (Central)	Version 3.07 and higher	Version 8.4.7 and higher
Canada West (Calgary)	Version 3.07 and higher	Version 8.4.7 and higher
China (Beijing)	Not available	Not available
China (Ningxia)	Not available	Not available
Europe (Frankfurt)	Version 3.07 and higher	Version 8.4.7 and higher
Europe (Ireland)	Version 3.07 and higher	Version 8.4.7 and higher
Europe (London)	Version 3.07 and higher	Version 8.4.7 and higher
Europe (Milan)	Version 3.07 and higher	Version 8.4.7 and higher
Europe (Paris)	Version 3.07 and higher	Version 8.4.7 and higher

Region	Aurora MySQL version 3	Aurora MySQL version 8.4
Europe (Spain)	Version 3.07 and higher	Version 8.4.7 and higher
Europe (Stockholm)	Version 3.07 and higher	Version 8.4.7 and higher
Europe (Zurich)	Version 3.07 and higher	Version 8.4.7 and higher
Israel (Tel Aviv)	Not available	Not available
Mexico (Central)	Version 3.07 and higher	Version 8.4.7 and higher
Middle East (Bahrain)	Version 3.07 and higher	Version 8.4.7 and higher
Middle East (UAE)	Version 3.07 and higher	Version 8.4.7 and higher
South America (São Paulo)	Version 3.07 and higher	Version 8.4.7 and higher
Amazon GovCloud (US-East)	Not available	Not available
Amazon GovCloud (US-West)	Not available	Not available

Supported Regions and Aurora DB engines for zero-downtime patching (ZDP)

Performing upgrades for Aurora DB clusters involves the possibility of an outage when the database is shut down and while it's being upgraded. By default, if you start the upgrade while the database is busy, you lose all the connections and transactions that the DB cluster is processing. If you wait until the database is idle to perform the upgrade, you might have to wait a long time.

The zero-downtime patching (ZDP) feature attempts, on a best-effort basis, to preserve client connections through an Aurora upgrade. If ZDP completes successfully, application sessions are preserved and the database engine restarts while the upgrade is in progress. The database engine restart can cause a drop in throughput lasting for a few seconds to approximately one minute.

For detailed information on the conditions and engine versions where ZDP is available for Aurora MySQL upgrades, see Using zero-downtime patching.

For detailed information on the conditions and engine versions where ZDP is available for Aurora PostgreSQL upgrades, see Minor release upgrades and zero-downtime patching.

Supported Regions and DB engines for Aurora engine-native features

Aurora database engines also support additional features and functionality specifically for Aurora. Some engine-native features might have limited support or restricted privileges for a particular Aurora DB engine, version, or Region.

Topics

- Engine-native features for Aurora MySQL
- Engine-native features for Aurora PostgreSQL

Engine-native features for Aurora MySQL

Following are the engine-native features for Aurora MySQL.

- Advanced Auditing
- Backtrack
- Fault injection queries
- In-cluster write forwarding
- Parallel query

Engine-native features for Aurora PostgreSQL

Following are the engine-native features for Aurora PostgreSQL.

- Babelfish
- Fault injection queries
- Query plan management

Amazon Aurora endpoint connections

Amazon Aurora typically involves a cluster of DB instances instead of a single instance. Each connection is handled by a specific DB instance. When you connect to an Aurora cluster, the host name and port that you specify point to an intermediate handler called an *endpoint*. Aurora uses the endpoint mechanism to abstract these connections. Thus, you don't have to hardcode all

the hostnames or write your own logic for balancing and rerouting connections when some DB instances aren't available.

For certain Aurora tasks, different instances or groups of instances perform different roles. For example, the primary instance handles all data definition language (DDL) and data manipulation language (DML) statements. Up to 15 Aurora Replicas handle read-only query traffic.

Topics

- Types of Aurora endpoints
- Viewing the endpoints for an Aurora cluster
- How Aurora endpoints work with high availability
- Cluster endpoints for Amazon Aurora
- Reader endpoints for Amazon Aurora
- Instance endpoints for Amazon Aurora
- Custom endpoints for Amazon Aurora

Types of Aurora endpoints

Using endpoints, you can map each connection to the appropriate instance or group of instances based on your use case. For example, to perform DDL statements you can connect to whichever instance is the primary instance. To perform queries, you can connect to the reader endpoint, with Aurora automatically performing connection-balancing among all the Aurora Replicas. For clusters with DB instances of different capacities or configurations, you can connect to custom endpoints associated with different subsets of DB instances. For diagnosis or tuning, you can connect to a specific instance endpoint to examine details about a specific DB instance.

An endpoint is represented as an Aurora-specific URL that contains a host address and a port. The following types of endpoints are available from an Aurora DB cluster.

Cluster endpoint

Connect to the primary instance of your cluster to develop and test applications, and perform transformations like `INSERT` statements and DDL, DML, and ETL operations. Find the cluster endpoint location by using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API, as described in Viewing the endpoints for an Aurora cluster.

For more information about cluster endpoints, see Cluster endpoints for Amazon Aurora.

Reader endpoint

Perform queries. Aurora automatically performs connection-balancing among all the Aurora Replicas. Find the reader endpoint location by using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API, as described in Viewing the endpoints for an Aurora cluster.

For more information about reader endpoints, see Reader endpoints for Amazon Aurora.

Instance endpoint

Examine details about a specific DB instance for diagnosis or tuning. You can find the instance endpoint location for each of your instances in the Amazon Web Services Management Console only, on the instance detail page for your instance.

For more information about instance endpoints, see Instance endpoints for Amazon Aurora.

Custom endpoint

Connect to different subsets of DB instances on the DB cluster. This is useful when you have different instance capacities and configurations within your DB cluster. Find the custom endpoint locations by using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API, as described in Viewing the endpoints for an Aurora cluster.

For more information about custom endpoints, see Custom endpoints for Amazon Aurora.

Aurora Global Database writer endpoint

Aurora Global Database has a special kind of endpoint that serves the same purpose as the cluster endpoint of a standalone Aurora cluster. It handles both write and read requests. When a secondary cluster becomes the new primary cluster due to a switchover or failover, Aurora automatically switches this endpoint to point to the cluster endpoint of the new primary cluster, in the other Amazon Web Services Region. That way, you don't have to encode the Amazon Region into the connection string for your application, and you don't have to change the connection string when the layout of the global database changes. Aurora creates this endpoint when you set up an Aurora Global Database, for example by choosing **Add Region** for an Aurora cluster in the Amazon Web Services Management Console.

For information on how you can use this type of endpoint with Aurora Global Database, see Connecting to Amazon Aurora Global Database.

Viewing the endpoints for an Aurora cluster

While you can only find the instance endpoint location on the instance detail page in the Amazon Web Services Management Console, you can use the console, Amazon CLI, or Amazon RDS API to find the locations of cluster, reader, and custom endpoints.

Console

In the Amazon Web Services Management Console, find the cluster endpoint, the reader endpoint, and any custom endpoints in the instance details page for your cluster. You see the instance endpoint in the detail page for each instance. When you connect, append the associated port number, following a colon, to the endpoint name shown on the detail page.

Amazon CLI

With the Amazon CLI, you find the writer, reader, and any custom endpoints in the output of the describe-db-clusters command. For example, the following command shows the endpoint attributes for all clusters in your current Amazon Region.

```
aws rds describe-db-clusters --query '*[].
{Endpoint:Endpoint,ReaderEndpoint:ReaderEndpoint,CustomEndpoints:CustomEndpoints}'
```

Amazon RDS API

With the Amazon RDS API, you retrieve the endpoints by calling the DescribeDBClusterEndpoints operation.

How Aurora endpoints work with high availability

For clusters where high availability is important, use the cluster endpoint for read/write or general-purpose connections and the reader endpoint for read-only connections. The writer and reader endpoints manage DB instance failover better than instance endpoints do. Unlike the instance endpoints, the writer and reader endpoints automatically change which DB instance they connect to if a DB instance in your cluster becomes unavailable. For more information about cluster and reader endpoints, see Cluster endpoints for Amazon Aurora and Reader endpoints for Amazon Aurora.

If the primary DB instance of a DB cluster fails, Aurora automatically fails over to a new primary DB instance. It does so by either promoting an existing Aurora Replica to a new primary DB instance or creating a new primary DB instance. If a failover occurs, you can use the cluster endpoint to

reconnect to the newly promoted or created primary DB instance, or use the reader endpoint to reconnect to one of the Aurora Replicas in the DB cluster. During a failover, the reader endpoint might direct connections to the new primary DB instance of a DB cluster for a short time after an Aurora Replica is promoted to the new primary DB instance.

If you design your own application logic to manage connections to instance endpoints, you can manually or programmatically discover the resulting set of available DB instances in the DB cluster. Use the describe-db-clusters Amazon CLI command or DescribeDBClusters RDS API operation to find the DB cluster and reader endpoints, DB instances, whether DB instances are readers, and their promotion tiers. You can then confirm their instance classes after failover and connect to an appropriate instance endpoint.

For more information about failovers, see Fault tolerance for an Aurora DB cluster.

For more information about high availability in Amazon Aurora, see High availability for Amazon Aurora.

Cluster endpoints for Amazon Aurora

A *cluster endpoint* (or *writer endpoint*) for an Aurora DB cluster connects to the current primary DB instance for that DB cluster. This endpoint is the only one that can perform write operations such as DDL statements. Because of this, the cluster endpoint is the one that you connect to when you first set up a cluster or when your cluster only contains a single DB instance.

Each Aurora DB cluster has one cluster endpoint and one primary DB instance.

You use the cluster endpoint for all write operations on the DB cluster, including inserts, updates, deletes, and DDL changes. You can also use the cluster endpoint for read operations, such as queries.

The cluster endpoint provides failover support for read/write connections to the DB cluster. If the current primary DB instance of a DB cluster fails, Aurora automatically fails over to a new primary DB instance. During a failover, the DB cluster continues to serve connection requests to the cluster endpoint from the new primary DB instance, with minimal interruption of service.

The following example illustrates a cluster endpoint for an Aurora MySQL DB cluster.

```
mydbcluster.cluster-c7tj4example.us-east-1.rds.amazonaws.com:3306
```

Each Aurora cluster has a single built-in cluster endpoint, whose name and other attributes are managed by Aurora. You can't create, delete, or modify this kind of endpoint.

You use the cluster endpoint when you administer your cluster, perform extract, transform, load (ETL) operations, or develop and test applications. The cluster endpoint connects to the primary instance of the cluster. The primary instance is the only DB instance where you can create tables and indexes, run `INSERT` statements, and perform other DDL and DML operations.

The physical IP address pointed to by the cluster endpoint changes when the failover mechanism promotes a new DB instance to be the read/write primary instance for the cluster. If you use any form of connection pooling or other multiplexing, be prepared to flush or reduce the time-to-live for any cached DNS information. Doing so ensures that you don't try to establish a read/write connection to a DB instance that became unavailable or is now read-only after a failover.

Reader endpoints for Amazon Aurora

A *reader endpoint* for an Aurora DB cluster provides connection-balancing support for read-only connections to the DB cluster. Use the reader endpoint for read operations, such as queries. By processing those statements on the read-only Aurora Replicas, this endpoint reduces the overhead on the primary instance. It also helps the cluster to scale the capacity to handle simultaneous `SELECT` queries, proportional to the number of Aurora Replicas in the cluster. Each Aurora DB cluster has one reader endpoint.

If the cluster contains one or more Aurora Replicas, the reader endpoint balances each connection request among the Aurora Replicas. In that case, you can only perform read-only statements such as `SELECT` in that session. If the cluster only contains a primary instance and no Aurora Replicas, the reader endpoint connects to the primary instance. In that case, you can perform write operations through the endpoint.

The following example illustrates a reader endpoint for an Aurora MySQL DB cluster.

```
mydbcluster.cluster-ro-c7tj4example.us-east-1.rds.amazonaws.com:3306
```

You use the reader endpoint for read-only connections for your Aurora cluster. This endpoint uses a connection-balancing mechanism to help your cluster handle a query-intensive workload. The reader endpoint is the endpoint that you supply to applications that do reporting or other read-only operations on the cluster.

The reader endpoint balances connections to available Aurora Replicas in an Aurora DB cluster. It doesn't balance individual queries. If you want to balance each query to distribute the read workload for a DB cluster, open a new connection to the reader endpoint for each query.

Each Aurora cluster has a single built-in reader endpoint, whose name and other attributes are managed by Aurora. You can't create, delete, or modify this kind of endpoint.

If your cluster contains only a primary target (instance or DB shard group) and no Aurora Replicas, the reader endpoint connects to the primary instance. In that case, you can perform write operations through this endpoint.

> **Tip**
>
> Through RDS Proxy, you can create additional read-only endpoints for an Aurora cluster. These endpoints perform the same kind of connection-balancing as the Aurora reader endpoint. Applications can reconnect more quickly to the proxy endpoints than the Aurora reader endpoint if reader instances become unavailable. The proxy endpoints can also take advantage of other proxy features such as multiplexing. For more information, see Using reader endpoints with Aurora clusters.

Instance endpoints for Amazon Aurora

An *instance endpoint* connects to a specific DB instance within an Aurora cluster. Each DB instance in a DB cluster has its own unique instance endpoint. So there is one instance endpoint for the current primary DB instance of the DB cluster, and there is one instance endpoint for each of the Aurora Replicas in the DB cluster.

The instance endpoint provides direct control over connections to the DB cluster, for scenarios where using the cluster endpoint or reader endpoint might not be appropriate. For example, your client application might require more fine-grained connection balancing based on workload type. In this case, you can configure multiple clients to connect to different Aurora Replicas in a DB cluster to distribute read workloads. For an example that uses instance endpoints to improve connection speed after a failover for Aurora PostgreSQL, see Fast failover with Amazon Aurora PostgreSQL. For an example that uses instance endpoints to improve connection speed after a failover for Aurora MySQL, see MariaDB Connector/J failover support - case Amazon Aurora.

The following example illustrates an instance endpoint for a DB instance in an Aurora MySQL DB cluster.

```
mydbinstance.c7tj4example.us-east-1.rds.amazonaws.com:3306
```

Each DB instance in an Aurora cluster has its own built-in instance endpoint, whose name and other attributes are managed by Aurora. You can't create, delete, or modify this kind of endpoint. You might be familiar with instance endpoints if you use Amazon RDS. However, with Aurora you typically use the writer and reader endpoints more often than the instance endpoints.

In day-to-day Aurora operations, the main way that you use instance endpoints is to diagnose capacity or performance issues that affect one specific instance in an Aurora cluster. While connected to a specific instance, you can examine its status variables, metrics, and so on. Doing this can help you determine what's happening for that instance that's different from what's happening for other instances in the cluster.

In advanced use cases, you might configure some DB instances differently than others. In this case, use the instance endpoint to connect directly to an instance that is smaller, larger, or otherwise has different characteristics than the others. Also, set up failover priority so that this special DB instance is the last choice to take over as the primary instance. We recommend that you use custom endpoints instead of the instance endpoint in such cases. Doing so simplifies connection management and high availability as you add more DB instances to your cluster.

Custom endpoints for Amazon Aurora

A *custom endpoint* for an Aurora cluster represents a set of DB instances that you choose. When you connect to the endpoint, Aurora performs connection balancing and chooses one of the instances in the group to handle the connection. You define which instances this endpoint refers to, and you decide what purpose the endpoint serves.

An Aurora DB cluster has no custom endpoints until you create one. You can create up to five custom endpoints for each provisioned Aurora cluster or Aurora serverless cluster.

The custom endpoint provides balanced database connections based on criteria other than the read-only or read/write capability of the DB instances. For example, you might define a custom endpoint to connect to instances that use a particular Amazon instance class or a particular DB parameter group. Then you might tell particular groups of users about this custom endpoint. For example, you might direct internal users to low-capacity instances for report generation or ad hoc (one-time) querying, and direct production traffic to high-capacity instances.

Because the connection can go to any DB instance that is associated with the custom endpoint, we recommend that you make sure that all the DB instances within that group share some similar characteristic. Doing so ensures that the performance, memory capacity, and so on, are consistent for everyone who connects to that endpoint.

This feature is intended for advanced users with specialized kinds of workloads where it isn't practical to keep all the Aurora Replicas in the cluster identical. With custom endpoints, you can predict the capacity of the DB instance used for each connection. When you use custom endpoints, you typically don't use the reader endpoint for that cluster.

The following example illustrates a custom endpoint for a DB instance in an Aurora MySQL DB cluster.

```
myendpoint.cluster-custom-c7tj4example.us-east-1.rds.amazonaws.com:3306
```

You use custom endpoints to simplify connection management when your cluster contains DB instances with different capacities and configuration settings.

Previously, you might have used the CNAMES mechanism to set up Domain Name Service (DNS) aliases from your own domain to achieve similar results. By using custom endpoints, you can avoid updating CNAME records when your cluster grows or shrinks. Custom endpoints also mean that you can use encrypted Transport Layer Security/Secure Sockets Layer (TLS/SSL) connections.

Instead of using one DB instance for each specialized purpose and connecting to its instance endpoint, you can have multiple groups of specialized DB instances. In this case, each group has its own custom endpoint. This way, Aurora can perform connection balancing among all the instances dedicated to tasks such as reporting or handling production or internal queries. The custom endpoints distribute connections across instances passively, using DNS to return the IP address of one of the instances randomly. If one of the DB instances within a group becomes unavailable, Aurora directs subsequent custom endpoint connections to one of the other DB instances associated with the same endpoint.

Topics

- Considerations for custom endpoints in Amazon Aurora
- Creating a custom endpoint
- Viewing custom endpoints
- Editing a custom endpoint
- Deleting a custom endpoint
- Amazon CLI examples for custom endpoints for Amazon Aurora

Considerations for custom endpoints in Amazon Aurora

Use the following sections to manage, specify properties, and use membership rules for custom endpoints.

Topics

- Managing custom endpoints
- Specifying properties for custom endpoints
- Membership rules for custom endpoints

Managing custom endpoints

Because newly created Aurora clusters have no custom endpoints, you must create and manage these objects yourself. You do so using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API.

> **Note**
>
> You must also create and manage custom endpoints for Aurora clusters restored from snapshots. Custom endpoints are not included in the snapshot. You create them again after restoring, and choose new endpoint names if the restored cluster is in the same region as the original one.

To work with custom endpoints from the Amazon Web Services Management Console, you navigate to the details page for your Aurora cluster and use the controls under the **Custom Endpoints** section.

To work with custom endpoints from the Amazon CLI, you can use these operations:

- create-db-cluster-endpoint
- describe-db-cluster-endpoints
- modify-db-cluster-endpoint
- delete-db-cluster-endpoint

To work with custom endpoints through the Amazon RDS API, you can use the following functions:

- CreateDBClusterEndpoint
- DescribeDBClusterEndpoints
- ModifyDBClusterEndpoint
- DeleteDBClusterEndpoint

Specifying properties for custom endpoints

The maximum length for a custom endpoint name is 63 characters. The name format is the following:

```
endpoint_name.cluster-custom-customer_DNS_identifier.AWS_Region.rds.amazonaws.com
```

You can't reuse the same custom endpoint name for more than one cluster in the same Amazon Web Services Region. The custom DNS identifier is a unique identifier associated with your Amazon Web Services account in a particular Amazon Web Services Region.

Each custom endpoint has an associated type that determines which DB instances are eligible to be associated with that endpoint. Currently, the type can be READER or ANY. The following considerations apply to the custom endpoint types:

- You can't select the custom endpoint type in the Amazon Web Services Management Console. All the custom endpoints you create through the Amazon Web Services Management Console have a type of ANY.

  You can set and modify the custom endpoint type using the Amazon CLI or Amazon RDS API.
- Only reader DB instances can be part of a READER custom endpoint.
- Both reader and writer DB instances can be part of an ANY custom endpoint. Aurora directs connections to cluster endpoints with type ANY to any associated DB instance with equal probability. The ANY type applies to clusters using any replication topology.
- If you try to create a custom endpoint with a type that isn't appropriate based on the replication configuration for a cluster, Aurora returns an error.

Membership rules for custom endpoints

When you add a DB instance to a custom endpoint or remove it from a custom endpoint, any existing connections to that DB instance remain active.

You can define a list of DB instances to include in, or exclude from, a custom endpoint. We refer to these lists as *static* and *exclusion* lists, respectively. You can use the inclusion/exclusion mechanism to further subdivide the groups of DB instances, and to make sure that the set of custom endpoints covers all the DB instances in the cluster. Each custom endpoint can contain only one of these list types.

In the Amazon Web Services Management Console:

- The choice is represented by the check box **Attach future instances added to this cluster**. When you keep the check box clear, the custom endpoint uses a static list containing only the DB instances specified on the page. When you choose the check box, the custom endpoint uses an exclusion list. In this case, the custom endpoint represents all DB instances in the cluster (including any that you add in the future) except the ones not selected on the page.
- The console doesn't allow you to specify the endpoint type. Any custom endpoint created using the console is of type `ANY`.

  Therefore, Aurora doesn't change the membership of the custom endpoint when DB instances change roles between writer and reader due to failover or promotion.

In the Amazon CLI and Amazon RDS API:

- You can specify the endpoint type. Therefore, when the endpoint type is set to `READER`, endpoint membership is automatically adjusted during failovers and promotions.

  For example, a custom endpoint with type `READER` includes an Aurora Replica that is then promoted to be a writer DB instance. The new writer instance is no longer part of the custom endpoint.
- You can add individual members to and remove them from the lists after they change their roles. Use the modify-db-cluster-endpoint Amazon CLI command or ModifyDBClusterEndpoint API operation.

You can associate a DB instance with more than one custom endpoint. For example, suppose that you add a new DB instance to a cluster, or that Aurora adds a DB instance automatically through the autoscaling mechanism. In these cases, the DB instance is added to all custom endpoints for which it is eligible. Which endpoints the DB instance is added to is based on the custom endpoint type of `READER` or `ANY`, plus any static or exclusion lists defined for each endpoint. For example, if the endpoint includes a static list of DB instances, newly added Aurora Replicas aren't added to

that endpoint. Conversely, if the endpoint has an exclusion list, newly added Aurora Replicas are added to the endpoint, if they aren't named in the exclusion list and their roles match the type of the custom endpoint.


If an Aurora Replica becomes unavailable, it remains associated with any custom endpoints. For example, it remains part of the custom endpoint when it is unhealthy, stopped, rebooting, and so on. However, you can't connect to it through those endpoints until it becomes available again.

Creating a custom endpoint

Create a custom endpoint using the Amazon Web Services Management Console, Amazon CLI, or the Amazon RDS API.

Console

To create a custom endpoint with the Amazon Web Services Management Console, go to the cluster detail page and choose the `Create custom endpoint` action in the **Endpoints** section. Choose a name for the custom endpoint, unique for your user ID and region. To choose a list of DB instances that remains the same even as the cluster expands, keep the check box **Attach future instances added to this cluster** clear. When you choose that check box, the custom endpoint dynamically adds any new instances as you add them to the cluster.

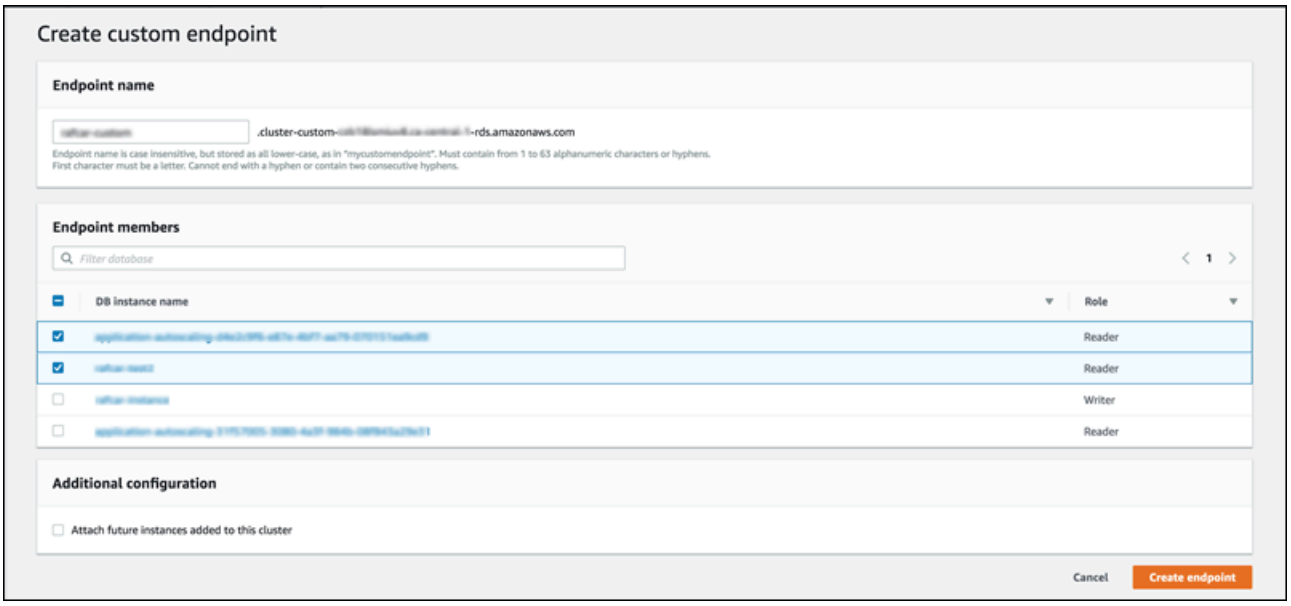

You can't select the custom endpoint type in the Amazon Web Services Management Console. All custom endpoints you create through the Amazon Web Services Management Console have a type of ANY.

Amazon CLI

To create a custom endpoint with the Amazon CLI, run the create-db-cluster-endpoint command.

The following command creates a custom endpoint attached to a specific cluster. Initially, the endpoint is associated with all the Aurora Replica instances in the cluster. A subsequent command associates it with a specific set of DB instances in the cluster.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster-endpoint --db-cluster-endpoint-identifier custom-endpoint-
doc-sample \
  --endpoint-type reader \
  --db-cluster-identifier cluster_id

aws rds modify-db-cluster-endpoint --db-cluster-endpoint-identifier custom-endpoint-
doc-sample \
  --static-members instance_name_1 instance_name_2
```

For Windows:

```
aws rds create-db-cluster-endpoint --db-cluster-endpoint-identifier custom-endpoint-
doc-sample ^
  --endpoint-type reader ^
  --db-cluster-identifier cluster_id

aws rds modify-db-cluster-endpoint --db-cluster-endpoint-identifier custom-endpoint-
doc-sample ^
  --static-members instance_name_1 instance_name_2
```

RDS API

To create a custom endpoint with the RDS API, run the CreateDBClusterEndpoint operation.


Viewing custom endpoints

Console

To view custom endpoints with the Amazon Web Services Management Console, go to the cluster detail page for the cluster and look under the **Endpoints** section. This section contains information only about custom endpoints. The details for the built-in endpoints are listed in the main **Details**

section. To see the details for a specific custom endpoint, select its name to bring up the detail page for that endpoint.


The following screenshot shows how the list of custom endpoints for an Aurora cluster is initially empty.

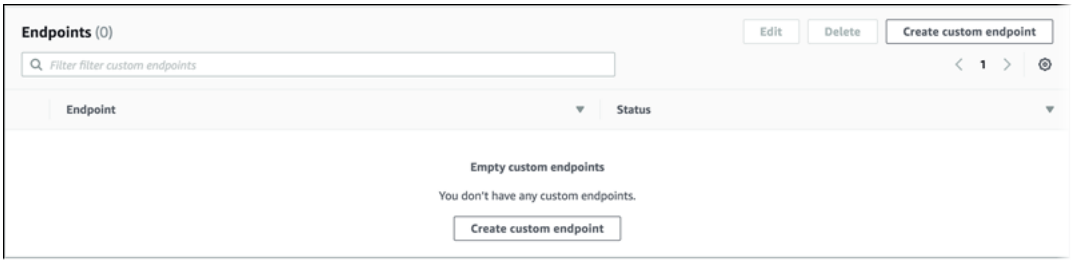

After you create some custom endpoints for that cluster, they are shown under the **Endpoints** section.



Clicking through to the detail page shows which DB instances the endpoint is currently associated with.

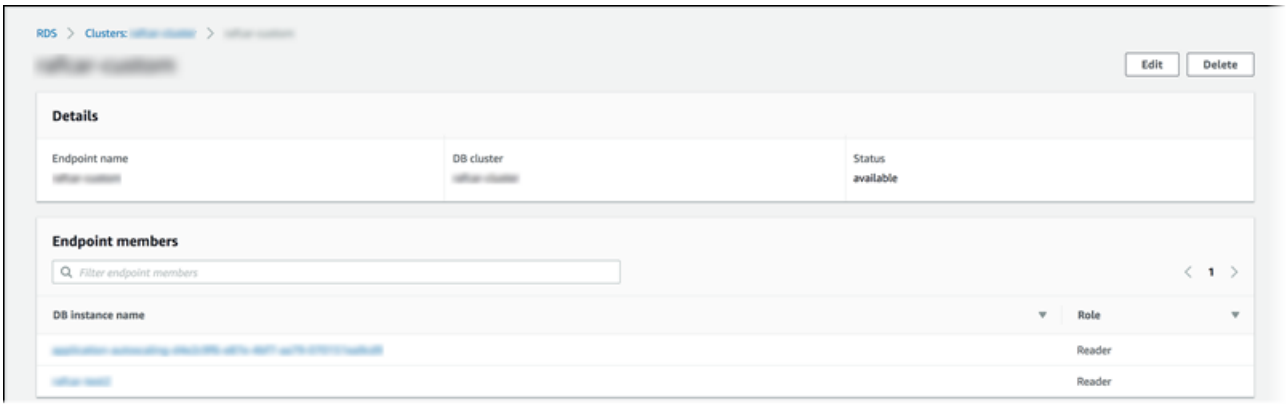

To see the additional detail of whether new DB instances added to the cluster are automatically added to the endpoint also, open the **Edit** page for the endpoint.

Amazon CLI

To view custom endpoints with the Amazon CLI, run the describe-db-cluster-endpoints command.

The following command shows the custom endpoints associated with a specified cluster in a specified region. The output includes both the built-in endpoints and any custom endpoints.

For Linux, macOS, or Unix:

```
aws rds describe-db-cluster-endpoints --region region_name \
  --db-cluster-identifier cluster_id
```

For Windows:

```
aws rds describe-db-cluster-endpoints --region region_name ^
  --db-cluster-identifier cluster_id
```

The following shows some sample output from a `describe-db-cluster-endpoints` command. The `EndpointType` of `WRITER` or `READER` denotes the built-in read/write and read-only endpoints for the cluster. The `EndpointType` of `CUSTOM` denotes endpoints that you create and choose the associated DB instances. One of the endpoints has a non-empty `StaticMembers` field, denoting that it is associated with a precise set of DB instances. The other endpoint has a non-empty `ExcludedMembers` field, denoting that the endpoint is associated with all DB instances *other than* the ones listed under `ExcludedMembers`. This second kind of custom endpoint grows to accommodate new instances as you add them to the cluster.

```
{
 "DBClusterEndpoints": [
  {
   "Endpoint": "custom-endpoint-demo.cluster-c7tj4example.ca-
central-1.rds.amazonaws.com",
   "Status": "available",
   "DBClusterIdentifier": "custom-endpoint-demo",
   "EndpointType": "WRITER"
  },
  {
   "Endpoint": "custom-endpoint-demo.cluster-ro-c7tj4example.ca-
central-1.rds.amazonaws.com",
   "Status": "available",
   "DBClusterIdentifier": "custom-endpoint-demo",
   "EndpointType": "READER"
  },
  {
   "CustomEndpointType": "ANY",
   "DBClusterEndpointIdentifier": "powers-of-2",
```

```
   "ExcludedMembers": [],
   "DBClusterIdentifier": "custom-endpoint-demo",
   "Status": "available",
   "EndpointType": "CUSTOM",
   "Endpoint": "powers-of-2.cluster-custom-c7tj4example.ca-
central-1.rds.amazonaws.com",
   "StaticMembers": [
     "custom-endpoint-demo-04",
     "custom-endpoint-demo-08",
     "custom-endpoint-demo-01",
     "custom-endpoint-demo-02"
   ],
   "DBClusterEndpointResourceIdentifier": "cluster-endpoint-
W7PE3TLLFNSHXQKFU6J6NV5FHU",
   "DBClusterEndpointArn": "arn:aws-cn:rds:ca-central-1:111122223333:cluster-
endpoint:powers-of-2"
  },
  {
   "CustomEndpointType": "ANY",
   "DBClusterEndpointIdentifier": "eight-and-higher",
   "ExcludedMembers": [
     "custom-endpoint-demo-04",
     "custom-endpoint-demo-02",
     "custom-endpoint-demo-07",
     "custom-endpoint-demo-05",
     "custom-endpoint-demo-03",
     "custom-endpoint-demo-06",
     "custom-endpoint-demo-01"
   ],
   "DBClusterIdentifier": "custom-endpoint-demo",
   "Status": "available",
   "EndpointType": "CUSTOM",
   "Endpoint": "eight-and-higher.cluster-custom-123456789012.ca-
central-1.rds.amazonaws.com",
   "StaticMembers": [],
   "DBClusterEndpointResourceIdentifier": "cluster-endpoint-
W7PE3TLLFNSHYQKFU6J6NV5FHU",
   "DBClusterEndpointArn": "arn:aws-cn:rds:ca-central-1:111122223333:cluster-
endpoint:eight-and-higher"
  }
 ]
}
```

RDS API

To view custom endpoints with the RDS API, run the DescribeDBClusterEndpoints.html operation.


Editing a custom endpoint

You can edit the properties of a custom endpoint to change which DB instances are associated with the endpoint. You can also change an endpoint between a static list and an exclusion list. If you need more details about these endpoint properties, see Membership rules for custom endpoints.

You can continue connecting to and using a custom endpoint while the changes from an edit action are in progress.

Console

To edit a custom endpoint with the Amazon Web Services Management Console, you can select the endpoint on the cluster detail page, or bring up the detail page for the endpoint, and choose the **Edit** action.

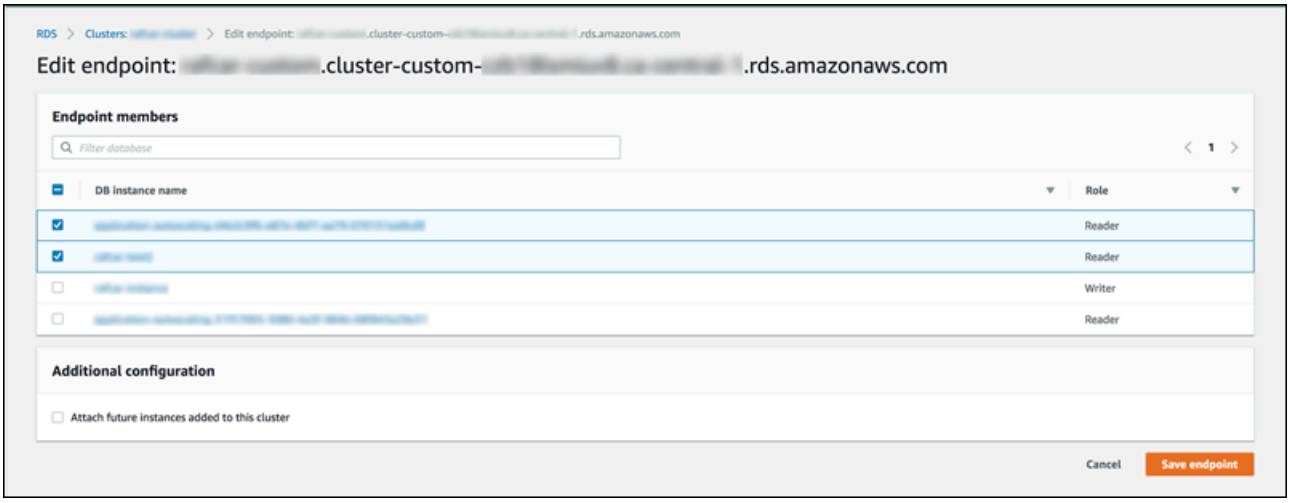

Amazon CLI

To edit a custom endpoint with the Amazon CLI, run the modify-db-cluster-endpoint command.

The following commands change the set of DB instances that apply to a custom endpoint and optionally switches between the behavior of a static or exclusion list. The `--static-members` and `--excluded-members` parameters take a space-separated list of DB instance identifiers.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-endpoint --db-cluster-endpoint-identifier my-custom-endpoint
 \
```

```
  --static-members db-instance-id-1 db-instance-id-2 db-instance-id-3 \
  --region region_name

aws rds modify-db-cluster-endpoint --db-cluster-endpoint-identifier my-custom-endpoint
 \
  --excluded-members db-instance-id-4 db-instance-id-5 \
  --region region_name
```

For Windows:

```
aws rds modify-db-cluster-endpoint --db-cluster-endpoint-identifier my-custom-endpoint
 ^
  --static-members db-instance-id-1 db-instance-id-2 db-instance-id-3 ^
  --region region_name

aws rds modify-db-cluster-endpoint --db-cluster-endpoint-identifier my-custom-endpoint
 ^
  --excluded-members db-instance-id-4 db-instance-id-5 ^
  --region region_name
```

RDS API

To edit a custom endpoint with the RDS API, run the ModifyDBClusterEndpoint.html operation.

Deleting a custom endpoint

Delete a custom endpoint using the Amazon Web Services Management Console, Amazon CLI, or the Amazon RDS API.

Console

To delete a custom endpoint with the Amazon Web Services Management Console, go to the cluster detail page, select the appropriate custom endpoint, and select the **Delete** action.



Amazon CLI

To delete a custom endpoint with the Amazon CLI, run the delete-db-cluster-endpoint command.

The following command deletes a custom endpoint. You don't need to specify the associated cluster, but you must specify the region.

For Linux, macOS, or Unix:

```
aws rds delete-db-cluster-endpoint --db-cluster-endpoint-identifier custom-end-point-id
 \
  --region region_name
```

For Windows:

```
aws rds delete-db-cluster-endpoint --db-cluster-endpoint-identifier custom-end-point-id
 ^
  --region region_name
```

RDS API

To delete a custom endpoint with the RDS API, run the DeleteDBClusterEndpoint operation.

Amazon CLI examples for custom endpoints for Amazon Aurora

The following tutorial uses Amazon CLI examples with Unix shell syntax to show how you might define a cluster with several "small" DB instances and a few "big" DB instances, and create custom endpoints to connect to each set of DB instances. To run similar commands on your own system, you should be familiar enough with the basics of working with Aurora clusters and Amazon CLI usage to supply your own values for parameters such as region, subnet group, and VPC security group.

This example demonstrates the initial setup steps: creating an Aurora cluster and adding DB instances to it. This is a heterogeneous cluster, meaning not all the DB instances have the same capacity. Most instances use the Amazon instance class `db.r4.4xlarge`, but the last two DB instances use `db.r4.16xlarge`. Each of these sample `create-db-instance` commands prints its output to the screen and saves a copy of the JSON in a file for later inspection.

```
aws rds create-db-cluster --db-cluster-identifier custom-endpoint-demo --engine aurora-
mysql \
     --engine-version 8.0.mysql_aurora.3.04.0 --master-username $MASTER_USER --manage-
master-user-password \
     --db-subnet-group-name $SUBNET_GROUP  --vpc-security-group-ids $VPC_SECURITY_GROUP
 \
     --region $REGION
```

```
for i in 01 02 03 04 05 06 07 08
do
  aws rds create-db-instance --db-instance-identifier custom-endpoint-demo-${i} \
     --engine aurora --db-cluster-identifier custom-endpoint-demo --db-instance-class
 db.r4.4xlarge \
     --region $REGION \
     | tee custom-endpoint-demo-${i}.json
done

for i in 09 10
do
  aws rds create-db-instance --db-instance-identifier custom-endpoint-demo-${i} \
     --engine aurora --db-cluster-identifier custom-endpoint-demo --db-instance-class
 db.r4.16xlarge \
     --region $REGION \
     | tee custom-endpoint-demo-${i}.json
done
```

The larger instances are reserved for specialized kinds of reporting queries. To make it unlikely for them to be promoted to the primary instance, the following example changes their promotion tier to the lowest priority. This example specifies the `--manage-master-user-password` option to generate the master user password and manage it in Secrets Manager. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager. Alternatively, you can use the `--master-password` option to specify and manage the password yourself.

```
for i in 09 10
do
  aws rds modify-db-instance --db-instance-identifier custom-endpoint-demo-${i} \
    --region $REGION --promotion-tier 15
done
```

Suppose that you want to use the two "bigger" instances only for the most resource-intensive queries. To do this, you can first create a custom read-only endpoint. Then you can add a static list of members so that the endpoint connects only to those DB instances. Those instances are already in the lowest promotion tier, making it unlikely either of them will be promoted to the primary instance. If one of them is promoted to the primary instance, it becomes unreachable through this endpoint because we specified the READER type instead of the ANY type.

The following example demonstrates the create and modify endpoint commands, and sample JSON output showing the initial and modified state of the custom endpoint.

```
$ aws rds create-db-cluster-endpoint --region $REGION \
    --db-cluster-identifier custom-endpoint-demo \
    --db-cluster-endpoint-identifier big-instances --endpoint-type reader
{
    "EndpointType": "CUSTOM",
    "Endpoint": "big-instances.cluster-custom-c7tj4example.ca-
central-1.rds.amazonaws.com",
    "DBClusterEndpointIdentifier": "big-instances",
    "DBClusterIdentifier": "custom-endpoint-demo",
    "StaticMembers": [],
    "DBClusterEndpointResourceIdentifier": "cluster-endpoint-
W7PE3TLLFNSHXQKFU6J6NV5FHU",
    "ExcludedMembers": [],
    "CustomEndpointType": "READER",
    "Status": "creating",
    "DBClusterEndpointArn": "arn:aws-cn:rds:ca-central-1:111122223333:cluster-
endpoint:big-instances"
}

$ aws rds modify-db-cluster-endpoint --db-cluster-endpoint-identifier big-instances \
    --static-members custom-endpoint-demo-09 custom-endpoint-demo-10 --region $REGION
{
    "EndpointType": "CUSTOM",
    "ExcludedMembers": [],
    "DBClusterEndpointIdentifier": "big-instances",
    "DBClusterEndpointResourceIdentifier": "cluster-endpoint-
W7PE3TLLFNSHXQKFU6J6NV5FHU",
    "CustomEndpointType": "READER",
    "DBClusterEndpointArn": "arn:aws-cn:rds:ca-central-1:111122223333:cluster-
endpoint:big-instances",
    "StaticMembers": [
        "custom-endpoint-demo-10",
        "custom-endpoint-demo-09"
    ],
    "Status": "modifying",
    "Endpoint": "big-instances.cluster-custom-c7tj4example.ca-
central-1.rds.amazonaws.com",
    "DBClusterIdentifier": "custom-endpoint-demo"
}
```

The default READER endpoint for the cluster can connect to either the "small" or "big" DB instances, making it impractical to predict query performance and scalability when the cluster becomes busy. To divide the workload cleanly between the sets of DB instances, you can ignore the default

READER endpoint and create a second custom endpoint that connects to all other DB instances. The following example does so by creating a custom endpoint and then adding an exclusion list. Any other DB instances you add to the cluster later will be added to this endpoint automatically. The ANY type means that this endpoint is associated with eight instances in total: the primary instance and another seven Aurora Replicas. If the example used the READER type, the custom endpoint would only be associated with the seven Aurora Replicas.

```
$ aws rds create-db-cluster-endpoint --region $REGION --db-cluster-identifier custom-
endpoint-demo \
    --db-cluster-endpoint-identifier small-instances --endpoint-type any
{
    "Status": "creating",
    "DBClusterEndpointIdentifier": "small-instances",
    "CustomEndpointType": "ANY",
    "EndpointType": "CUSTOM",
    "Endpoint": "small-instances.cluster-custom-c7tj4example.ca-
central-1.rds.amazonaws.com",
    "StaticMembers": [],
    "ExcludedMembers": [],
    "DBClusterIdentifier": "custom-endpoint-demo",
    "DBClusterEndpointArn": "arn:aws-cn:rds:ca-central-1:111122223333:cluster-
endpoint:small-instances",
    "DBClusterEndpointResourceIdentifier": "cluster-
endpoint-6RDDXQOC3AKKZT2PRD7ST37BMY"
}

$ aws rds modify-db-cluster-endpoint --db-cluster-endpoint-identifier small-instances \
    --excluded-members custom-endpoint-demo-09 custom-endpoint-demo-10 --region $REGION
{
    "DBClusterEndpointIdentifier": "small-instances",
    "DBClusterEndpointArn": "arn:aws-cn:rds:ca-central-1:c7tj4example:cluster-
endpoint:small-instances",
    "DBClusterEndpointResourceIdentifier": "cluster-
endpoint-6RDDXQOC3AKKZT2PRD7ST37BMY",
    "CustomEndpointType": "ANY",
    "Endpoint": "small-instances.cluster-custom-c7tj4example.ca-
central-1.rds.amazonaws.com",
    "EndpointType": "CUSTOM",
    "ExcludedMembers": [
        "custom-endpoint-demo-09",
        "custom-endpoint-demo-10"
    ],
    "StaticMembers": [],
```

```
    "DBClusterIdentifier": "custom-endpoint-demo",
    "Status": "modifying"
}
```

The following example checks the state of the endpoints for this cluster. The cluster still has its original cluster endpoint, with `EndPointType` of `WRITER`, which you would still use for administration, ETL, and other write operations. It still has its original `READER` endpoint, which you wouldn't use because each connection to it might be directed to a "small" or "big" DB instance. The custom endpoints make this behavior predictable, with connections guaranteed to use one of the "small" or "big" DB instances based on the endpoint you specify.

```
$ aws rds describe-db-cluster-endpoints --region $REGION
{
    "DBClusterEndpoints": [
        {
            "EndpointType": "WRITER",
            "Endpoint": "custom-endpoint-demo.cluster-c7tj4example.ca-
central-1.rds.amazonaws.com",
            "Status": "available",
            "DBClusterIdentifier": "custom-endpoint-demo"
        },
        {
            "EndpointType": "READER",
            "Endpoint": "custom-endpoint-demo.cluster-ro-c7tj4example.ca-
central-1.rds.amazonaws.com",
            "Status": "available",
            "DBClusterIdentifier": "custom-endpoint-demo"
        },
        {
            "Endpoint": "small-instances.cluster-custom-c7tj4example.ca-
central-1.rds.amazonaws.com",
            "CustomEndpointType": "ANY",
            "DBClusterEndpointArn": "arn:aws-cn:rds:ca-central-1:111122223333:cluster-
endpoint:small-instances",
            "ExcludedMembers": [
                "custom-endpoint-demo-09",
                "custom-endpoint-demo-10"
            ],
            "DBClusterEndpointResourceIdentifier": "cluster-
endpoint-6RDDXQOC3AKKZT2PRD7ST37BMY",
            "DBClusterIdentifier": "custom-endpoint-demo",
            "StaticMembers": [],
```

```
            "EndpointType": "CUSTOM",
            "DBClusterEndpointIdentifier": "small-instances",
            "Status": "modifying"
        },
        {
            "Endpoint": "big-instances.cluster-custom-c7tj4example.ca-
central-1.rds.amazonaws.com",
            "CustomEndpointType": "READER",
            "DBClusterEndpointArn": "arn:aws-cn:rds:ca-central-1:111122223333:cluster-
endpoint:big-instances",
            "ExcludedMembers": [],
            "DBClusterEndpointResourceIdentifier": "cluster-endpoint-
W7PE3TLLFNSHXQKFU6J6NV5FHU",
            "DBClusterIdentifier": "custom-endpoint-demo",
            "StaticMembers": [
                "custom-endpoint-demo-10",
                "custom-endpoint-demo-09"
            ],
            "EndpointType": "CUSTOM",
            "DBClusterEndpointIdentifier": "big-instances",
            "Status": "available"
        }
    ]
}
```

The final examples demonstrate how successive database connections to the custom endpoints connect to the various DB instances in the Aurora cluster. The `small-instances` endpoint always connects to the `db.r4.4xlarge` DB instances, which are the lower-numbered hosts in this cluster.

```
$ mysql -h small-instances.cluster-custom-c7tj4example.ca-central-1.rds.amazonaws.com -
u $MYUSER -p
mysql> select @@aurora_server_id;
+--------------------------+
| @@aurora_server_id       |
+--------------------------+
| custom-endpoint-demo-02 |
+--------------------------+

$ mysql -h small-instances.cluster-custom-c7tj4example.ca-central-1.rds.amazonaws.com -
u $MYUSER -p
mysql> select @@aurora_server_id;
+--------------------------+
| @@aurora_server_id       |
```

```
+-------------------------+
| custom-endpoint-demo-07 |
+-------------------------+

$ mysql -h small-instances.cluster-custom-c7tj4example.ca-central-1.rds.amazonaws.com -
u $MYUSER -p
mysql> select @@aurora_server_id;
+-------------------------+
| @@aurora_server_id      |
+-------------------------+
| custom-endpoint-demo-01 |
+-------------------------+
```

The `big-instances` endpoint always connects to the `db.r4.16xlarge` DB instances, which are the two highest-numbered hosts in this cluster.

```
$ mysql -h big-instances.cluster-custom-c7tj4example.ca-central-1.rds.amazonaws.com -u
 $MYUSER -p
mysql> select @@aurora_server_id;
+-------------------------+
| @@aurora_server_id      |
+-------------------------+
| custom-endpoint-demo-10 |
+-------------------------+

$ mysql -h big-instances.cluster-custom-c7tj4example.ca-central-1.rds.amazonaws.com -u
 $MYUSER -p
mysql> select @@aurora_server_id;
+-------------------------+
| @@aurora_server_id      |
+-------------------------+
| custom-endpoint-demo-09 |
+-------------------------+
```

Amazon AuroraDB instance classes

The DB instance class determines the computation and memory capacity of an Amazon Aurora DB instance. The DB instance class that you need depends on your processing power and memory requirements.

A DB instance class consists of both the DB instance class type and the size. For example, db.r6g is a memory-optimized DB instance class type powered by Amazon Graviton2 processors. Within the db.r6g instance class type, db.r6g.2xlarge is a DB instance class. The size of this class is 2xlarge.

For more information about DB instance class types, supported DB engines, supported Amazon Web Services Regions, or hardware specifications for DB instance classes, see the following sections.

Topics

- DB instance class types
- Supported DB engines for DB instance classes
- Determining DB instance class support in Amazon Web Services Regions
- Hardware specifications for DB instance classes for Aurora

DB instance class types

Amazon Aurora supports DB instance classes for the following use cases:

- Aurora serverless
- Memory-optimized
- Burstable-performance
- Optimized Reads

For more information about Amazon EC2 instance types, see Instance types in the Amazon EC2 documentation.

Aurora serverless instance class type

The following Aurora serverless type is available:

- **db.serverless** – A special DB instance class type used by Aurora serverless. Aurora adjusts the compute, memory, and network resources dynamically as the workload changes. For usage details, see Using Aurora serverless.

Memory-optimized instance class types

The memory-optimized X family supports the following instance classes:

- **db.x2g** – Instance classes optimized for memory-intensive applications and powered by Amazon Graviton2 processors. These instance classes offer low cost per GiB of memory.

  You can modify a DB instance to use one of the DB instance classes powered by Amazon Graviton2 processors. To do so, complete the same steps as with any other DB instance modification.

The memory-optimized R family supports the following instance class types:

- **db.r9g** – Instance classes powered by Amazon Graviton5 processors. These instance classes are ideal for running memory-intensive workloads. They are powered by the Amazon Nitro System, a combination of dedicated hardware and lightweight hypervisor.
- You can modify a DB instance to use one of the DB instance classes powered by Amazon Graviton5 processors. To do so, complete the same steps as with any other DB instance modification.
- **db.r8g** – Instance classes powered by Amazon Graviton4 processors. These instance classes are ideal for running memory-intensive workloads. These instances offer larger instance sizes with up to 3x more vCPUs and memory than the seventh-generation Amazon Graviton3-based db.r7g instances. They are powered by the Amazon Nitro System, a combination of dedicated hardware and lightweight hypervisor.
- You can modify a DB instance to use one of the DB instance classes powered by Amazon Graviton4 processors. To do so, complete the same steps as with any other DB instance modification.
- **db.r8i** – Instance classes powered by Intel Xeon 6 processors. These instance classes are ideal for running memory-intensive workloads that benefit from high-performance local storage, including in-memory databases, real-time big data analytics, large in-memory caches, scientific computing applications requiring scratch space, and data processing applications needing high-speed local storage.

- **db.r8a** – Instance classes powered by 5th Generation AMD EPYC processors. These instance classes are ideal for running memory-intensive workloads. These processors run at frequencies of up to 4.5 GHz. They are powered by the Amazon Nitro System, a combination of dedicated hardware and lightweight hypervisor.
- **db.r7g** – Instance classes powered by Amazon Graviton3 processors. These instance classes are ideal for running memory-intensive workloads.

  You can modify a DB instance to use one of the DB instance classes powered by Amazon Graviton3 processors. To do so, complete the same steps as with any other DB instance modification. They are powered by the Amazon Nitro System, a combination of dedicated hardware and lightweight hypervisor.
- **db.r7i** – Instance classes powered by 4th Generation Intel Xeon Scalable processors. These instance classes are SAP-Certified and are ideal for running memory-intensive workloads. You can modify a DB instance to use one of the DB instance classes powered by 4th Generation Intel Xeon Scalable processors. To do so, complete the same steps as with any other DB instance modification. They are powered by the Amazon Nitro System, a combination of dedicated hardware and lightweight hypervisor.
- **db.r6g** – Instance classes powered by Amazon Graviton2 processors. These instance classes are ideal for running memory-intensive workloads. They are powered by the Amazon Nitro System, a combination of dedicated hardware and lightweight hypervisor.
- You can modify a DB instance to use one of the DB instance classes powered by Amazon Graviton2 processors. To do so, complete the same steps as with any other DB instance modification.
- **db.r6i** – Instance classes powered by 3rd Generation Intel Xeon Scalable processors. These instance classes are SAP-Certified and are an ideal fit for memory-intensive workloads.
- **db.r5** – Instance classes optimized for memory-intensive applications. These instance classes offer improved networking and Amazon Elastic Block Store (Amazon EBS) performance. They are powered by the Amazon Nitro System, a combination of dedicated hardware and lightweight hypervisor.
- **db.r4** – These instance classes are supported only for Aurora MySQL 2.x and Aurora PostgreSQL 11 and 12 versions. For all Aurora DB clusters that use db.r4 DB instance classes, we recommend that you upgrade to a higher generation instance class as soon as possible.

  The db.r4 instance classes aren't available for the Aurora I/O-Optimized cluster storage configuration.

Burstable-performance instance class types

The following burstable-performance DB instance class types are available:

- **db.t4g** – General-purpose instance classes powered by Arm-based Amazon Graviton2 processors. These instance classes deliver better price performance than previous burstable-performance DB instance classes for a broad set of burstable general-purpose workloads. Amazon RDS db.t4g instances are configured for Unlimited mode. This means that they can burst beyond the baseline over a 24-hour window for an additional charge.

  You can modify a DB instance to use one of the DB instance classes powered by Amazon Graviton2 processors. To do so, complete the same steps as with any other DB instance modification.
- **db.t3** – Instance classes that provide a baseline performance level, with the ability to burst to full CPU usage. The db.t3 instances are configured for Unlimited mode. These instance classes provide more computing capacity than the previous db.t2 instance classes. They are powered by the Amazon Nitro System, a combination of dedicated hardware and lightweight hypervisor. We recommend using these instance classes only for development and test servers, or other non-production servers.
- **db.t2** – Instance classes that provide a baseline performance level, with the ability to burst to full CPU usage. The db.t2 instances are configured for Unlimited mode. We recommend using these instance classes only for development and test servers, or other non-production servers.

  The db.t2 instance classes aren't available for the Aurora I/O-Optimized cluster storage configuration.

> **Note**
>
> We recommend using the T DB instance classes only for development, test, or other nonproduction servers. For more detailed recommendations for the T instance classes, see Using T instance classes for development and testing.

For DB instance class hardware specifications, see Hardware specifications for DB instance classes for Aurora.

Optimized Reads instance class types

The following Optimized Reads instance class types are available:

- **db.r8gd** – Instance classes powered by Graviton4 processors. These instance classes are ideal for running memory-intensive workloads and offer local NVMe-based SSD block-level storage for applications that need high-speed, low latency local storage. They offer a maximum memory of 1.5 TiB and up to 11.4 TB of direct-attached NVMe-based SSD storage.
- **db.r6gd** – Instance classes powered by Amazon Graviton2 processors. These instance classes are ideal for running memory-intensive workloads and offer local NVMe-based SSD block-level storage for applications that need high-speed, low latency local storage.
- **db.r6id** – Instance classes powered by 3rd Generation Intel Xeon Scalable processors. These instance classes are SAP-Certified and are an ideal fit for memory-intensive workloads. They offer a maximum memory of 1 TiB and up to 7.6 TB of direct-attached NVMe-based SSD storage.

Supported DB engines for DB instance classes

The following tables show the supported DB instance classes for the Amazon Aurora DB engines.

db.serverless – Aurora serverless instance class with automatic capacity scaling

Instance class	Aurora MySQL	Aurora PostgreSQL
db.serverless	See Supported Regions and Aurora DB engines for Aurora serverless.	See Supported Regions and Aurora DB engines for Aurora serverless.

db.x2g – memory-optimized instance classes powered by Amazon Graviton2 processors

Instance class	Aurora MySQL	Aurora PostgreSQL
db.x2g.16xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher

Instance class	Aurora MySQL	Aurora PostgreSQL
db.x2g.12xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.x2g.8xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.x2g.4xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.x2g.2xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.x2g.xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.x2g.large	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher

db.r6gd – Optimized Reads instance classes powered by Amazon Graviton2 processors

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r6gd.16xlarge	No	17.4 and higher, 16.1 and higher, 15.4 and higher, 14.9 and higher
db.r6gd.12xlarge	No	17.4 and higher, 16.1 and higher, 15.4 and higher, 14.9 and higher
db.r6gd.8xlarge	No	17.4 and higher, 16.1 and higher, 15.4 and higher, 14.9 and higher
db.r6gd.4xlarge	No	17.4 and higher, 16.1 and higher, 15.4 and higher, 14.9 and higher
db.r6gd.2xlarge	No	17.4 and higher, 16.1 and higher, 15.4 and higher, 14.9 and higher
db.r6gd.xlarge	No	17.4 and higher, 16.1 and higher, 15.4 and higher, 14.9 and higher

db.r6id – Optimized Reads instance classes

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r6id.32xlarge	No	17.4 and higher, 16.1 and higher, 15.4 and higher, 14.9 and higher
db.r6id.24xlarge	No	17.4 and higher, 16.1 and higher, 15.4 and higher, 14.9 and higher

db.r8a – memory-optimized instance classes powered by 5th Generation AMD EPYC processors

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r8a.48xlarge	3.08.0 and higher, 3.09.0 and higher, 3.10.0 and higher, 3.11.1, 3.12.0, 8.4.7 and higher	14.17 and higher, 15.10 and higher, 16.8 and higher, 17.4 and higher, 18.3
db.r8a.24xlarge	3.08.0 and higher, 3.09.0 and higher, 3.10.0 and higher, 3.11.1, 3.12.0, 8.4.7 and higher	14.17 and higher, 15.10 and higher, 16.8 and higher, 17.4 and higher, 18.3
db.r8a.16xlarge	3.08.0 and higher, 3.09.0 and higher, 3.10.0 and higher, 3.11.1, 3.12.0, 8.4.7 and higher	14.17 and higher, 15.10 and higher, 16.8 and higher, 17.4 and higher, 18.3
db.r8a.12xlarge	3.08.0 and higher, 3.09.0 and higher, 3.10.0 and higher, 3.11.1, 3.12.0, 8.4.7 and higher	14.17 and higher, 15.10 and higher, 16.8 and higher, 17.4 and higher, 18.3
db.r8a.8xlarge	3.08.0 and higher, 3.09.0 and higher, 3.10.0 and higher, 3.11.1, 3.12.0, 8.4.7 and higher	14.17 and higher, 15.10 and higher, 16.8 and higher, 17.4 and higher, 18.3
db.r8a.4xlarge	3.08.0 and higher, 3.09.0 and higher, 3.10.0 and higher, 3.11.1, 3.12.0, 8.4.7 and higher	14.17 and higher, 15.10 and higher, 16.8 and higher, 17.4 and higher, 18.3
db.r8a.2xlarge	3.08.0 and higher, 3.09.0 and higher, 3.10.0 and higher, 3.11.1, 3.12.0, 8.4.7 and higher	14.17 and higher, 15.10 and higher, 16.8 and higher, 17.4 and higher, 18.3
db.r8a.xlarge	3.08.0 and higher, 3.09.0 and higher, 3.10.0 and higher, 3.11.1, 3.12.0, 8.4.7 and higher	14.17 and higher, 15.10 and higher, 16.8 and higher, 17.4 and higher, 18.3
db.r8a.large	3.08.0 and higher, 3.09.0 and higher, 3.10.0 and higher, 3.11.1, 3.12.0, 8.4.7 and higher	14.17 and higher, 15.10 and higher, 16.8 and higher, 17.4 and higher, 18.3

db.r9g – memory-optimized instance classes powered by Amazon Graviton5 processors

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r9g.48xlarge	3.08.0 through 3.08.2, 3.09.0, 3.10.0 through 3.10.6, 3.11.1, 3.12.0, 8.4.7, 8.4.8, 8.4.10	14.17 through 14.20, 14.22 through 14.24, 15.10, 15.12 through 15.15, 15.17 through 15.19, 16.8 through 16.11, 16.13 through 16.15, 17.4 through 17.7, 17.9 through 17.11, 18.3, 18.4, 18.6
db.r9g.24xlarge	3.08.0 through 3.08.2, 3.09.0, 3.10.0 through 3.10.6, 3.11.1, 3.12.0, 8.4.7, 8.4.8, 8.4.10	14.17 through 14.20, 14.22 through 14.24, 15.10, 15.12 through 15.15, 15.17 through 15.19, 16.8 through 16.11, 16.13 through 16.15, 17.4 through 17.7, 17.9 through 17.11, 18.3, 18.4, 18.6
db.r9g.16xlarge	3.08.0 through 3.08.2, 3.09.0, 3.10.0 through 3.10.6, 3.11.1, 3.12.0, 8.4.7, 8.4.8, 8.4.10	14.17 through 14.20, 14.22 through 14.24, 15.10, 15.12 through 15.15, 15.17 through 15.19, 16.8 through 16.11, 16.13 through 16.15, 17.4 through 17.7, 17.9 through 17.11, 18.3, 18.4, 18.6
db.r9g.12xlarge	3.08.0 through 3.08.2, 3.09.0, 3.10.0 through 3.10.6, 3.11.1, 3.12.0, 8.4.7, 8.4.8, 8.4.10	14.17 through 14.20, 14.22 through 14.24, 15.10, 15.12 through 15.15, 15.17 through 15.19, 16.8 through 16.11, 16.13 through 16.15, 17.4 through 17.7, 17.9 through 17.11, 18.3, 18.4, 18.6
db.r9g.8xlarge	3.08.0 through 3.08.2, 3.09.0, 3.10.0 through 3.10.6, 3.11.1, 3.12.0, 8.4.7, 8.4.8, 8.4.10	14.17 through 14.20, 14.22 through 14.24, 15.10, 15.12 through 15.15, 15.17 through 15.19, 16.8 through 16.11, 16.13 through 16.15, 17.4 through 17.7, 17.9 through 17.11, 18.3, 18.4, 18.6

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r9g.4xlarge	3.08.0 through 3.08.2, 3.09.0, 3.10.0 through 3.10.6, 3.11.1, 3.12.0, 8.4.7, 8.4.8, 8.4.10	14.17 through 14.20, 14.22 through 14.24, 15.10, 15.12 through 15.15, 15.17 through 15.19, 16.8 through 16.11, 16.13 through 16.15, 17.4 through 17.7, 17.9 through 17.11, 18.3, 18.4, 18.6
db.r9g.2xlarge	3.08.0 through 3.08.2, 3.09.0, 3.10.0 through 3.10.6, 3.11.1, 3.12.0, 8.4.7, 8.4.8, 8.4.10	14.17 through 14.20, 14.22 through 14.24, 15.10, 15.12 through 15.15, 15.17 through 15.19, 16.8 through 16.11, 16.13 through 16.15, 17.4 through 17.7, 17.9 through 17.11, 18.3, 18.4, 18.6
db.r9g.xlarge	3.08.0 through 3.08.2, 3.09.0, 3.10.0 through 3.10.6, 3.11.1, 3.12.0, 8.4.7, 8.4.8, 8.4.10	14.17 through 14.20, 14.22 through 14.24, 15.10, 15.12 through 15.15, 15.17 through 15.19, 16.8 through 16.11, 16.13 through 16.15, 17.4 through 17.7, 17.9 through 17.11, 18.3, 18.4, 18.6
db.r9g.large	3.08.0 through 3.08.2, 3.09.0, 3.10.0 through 3.10.6, 3.11.1, 3.12.0, 8.4.7, 8.4.8, 8.4.10	14.17 through 14.20, 14.22 through 14.24, 15.10, 15.12 through 15.15, 15.17 through 15.19, 16.8 through 16.11, 16.13 through 16.15, 17.4 through 17.7, 17.9 through 17.11, 18.3, 18.4, 18.6

db.r8g – memory-optimized instance classes powered by Amazon Graviton4 processors

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r8g.48xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r8g.24xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r8g.16xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r8g.12xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r8g.8xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r8g.4xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r8g.2xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r8g.xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r8g.large	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher

db.r8gd – optimized reads instance classes powered by Amazon Graviton4 processors

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r8gd.48xlarge	No	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher
db.r8gd.24xlarge	No	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher
db.r8gd.16xlarge	No	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher
db.r8gd.12xlarge	No	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher
db.r8gd.8xlarge	No	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher
db.r8gd.4xlarge	No	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher
db.r8gd.2xlarge	No	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher
db.r8gd.xlarge	No	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher

db.r7g – memory-optimized instance classes powered by Amazon Graviton3 processors

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r7g.16xlarge	2.12.0 and higher, 3.03.1 and higher	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.7 and higher, 13.10 and higher

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r7g.12xlarge	2.12.0 and higher, 3.03.1 and higher	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.7 and higher, 13.10 and higher
db.r7g.8xlarge	2.12.0 and higher, 3.03.1 and higher	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.7 and higher, 13.10 and higher
db.r7g.4xlarge	2.12.0 and higher, 3.03.1 and higher	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.7 and higher, 13.10 and higher
db.r7g.2xlarge	2.12.0 and higher, 3.03.1 and higher	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.7 and higher, 13.10 and higher
db.r7g.xlarge	2.12.0 and higher, 3.03.1 and higher	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.7 and higher, 13.10 and higher
db.r7g.large	2.12.0 and higher, 3.03.1 and higher	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.7 and higher, 13.10 and higher

db.r7i – memory-optimized instance classes

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r7i.48xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r7i.24xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r7i.16xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r7i.12xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r7i.8xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r7i.4xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r7i.2xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r7i.xlarge	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher
db.r7i.large	3.08.0 and higher	17.4 and higher, 16.3 and higher, 15.7 and higher, 14.12 and higher, 13.15 and higher

db.r6g – memory-optimized instance classes powered by Amazon Graviton2 processors

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r6g.16xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher,

Instance class	Aurora MySQL	Aurora PostgreSQL
		13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.r6g.12xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.r6g.8xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.r6g.4xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.r6g.2xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.r6g.xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher
db.r6g.large	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.8 and higher, 11.9, 11.12 and higher

db.r6i – memory-optimized instance classes

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r6i.32xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.5 and higher, 12.9 and higher
db.r6i.24xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.5 and higher, 12.9 and higher
db.r6i.16xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.5 and higher, 12.9 and higher
db.r6i.12xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.5 and higher, 12.9 and higher
db.r6i.8xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.5 and higher, 12.9 and higher
db.r6i.4xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.5 and higher, 12.9 and higher
db.r6i.2xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.5 and higher, 12.9 and higher
db.r6i.xlarge	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.5 and higher, 12.9 and higher
db.r6i.large	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.5 and higher, 12.9 and higher

db.r5 – memory-optimized instance classes

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r5.24xlarge	All currently available versions	All currently available versions
db.r5.16xlarge	All currently available versions	All currently available versions
db.r5.12xlarge	All currently available versions	All currently available versions
db.r5.8xlarge	All currently available versions	All currently available versions
db.r5.4xlarge	All currently available versions	All currently available versions
db.r5.2xlarge	All currently available versions	All currently available versions
db.r5.xlarge	All currently available versions	All currently available versions
db.r5.large	All currently available versions	All currently available versions

db.r4 – memory-optimized instance classes

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r4.16xlarge	All 2.x versions; not supported in 3.x versions	All supported 11 and 12 versions
db.r4.8xlarge	All 2.x versions; not supported in 3.x versions	All supported 11 and 12 versions
db.r4.4xlarge	All 2.x versions; not supported in 3.x versions	All supported 11 and 12 versions
db.r4.2xlarge	All 2.x versions; not supported in 3.x versions	All supported 11 and 12 versions
db.r4.xlarge	All 2.x versions; not supported in 3.x versions	All supported 11 and 12 versions

Instance class	Aurora MySQL	Aurora PostgreSQL
db.r4.large	All 2.x versions; not supported in 3.x versions	All supported 11 and 12 versions

db.t4g – burstable-performance instance classes powered by Amazon Graviton2 processors

Instance class	Aurora MySQL	Aurora PostgreSQL
db.t4g.2xlarge	No	No
db.t4g.xlarge	No	No
db.t4g.large	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.7 and higher, 11.12 and higher
db.t4g.medium	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.7 and higher, 11.12 and higher
db.t4g.small	No	No

db.t3 – burstable-performance instance classes

Instance class	Aurora MySQL	Aurora PostgreSQL
db.t3.2xlarge	No	No
db.t3.xlarge	No	No
db.t3.large	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.7 and higher, 11.12 and higher

Instance class	Aurora MySQL	Aurora PostgreSQL
db.t3.medium	All currently available versions	17.4 and higher, 16.1 and higher, 15.2 and higher, 14.3 and higher, 13.3 and higher, 12.7 and higher, 11.12 and higher
db.t3.small	All 2.x versions; not supported in 3.x versions	No
db.t3.micro	No	No

db.t2 – burstable-performance instance classes

Instance class	Aurora MySQL	Aurora PostgreSQL
db.t2.medium	All 2.x versions; not supported in 3.x versions	No
db.t2.small	All 2.x versions; not supported in 3.x versions	No

Determining DB instance class support in Amazon Web Services Regions

To determine the DB instance classes supported by each DB engine in a specific Amazon Web Services Region, you can take one of several approaches. You can use the Amazon Web Services Management Console, the Amazon RDS Pricing page, or the describe-orderable-db-instance-options Amazon CLI command.

> **Note**
>
> When you perform operations with the Amazon Web Services Management Console, it automatically shows the supported DB instance classes for a specific DB engine, DB engine version, and Amazon Web Services Region. Examples of the operations that you can perform include creating and modifying a DB instance.

Contents

- Using the Amazon RDS pricing page to determine DB instance class support in Amazon Web Services Regions
- Using the Amazon CLI to determine DB instance class support in Amazon Web Services Regions
  - Listing the DB instance classes that are supported by a specific DB engine version in an Amazon Web Services Region
  - Listing the DB engine versions that support a specific DB instance class in an Amazon Web Services Region

Using the Amazon RDS pricing page to determine DB instance class support in Amazon Web Services Regions

You can use the Amazon Aurora Pricing page to determine the DB instance classes supported by each DB engine in a specific Amazon Web Services Region.

To use the pricing page to determine the DB instance classes supported by each engine in a Region

1. Go to Amazon Aurora Pricing.
2. Choose an Amazon Aurora engine in the **Amazon Pricing Calculator** section.
3. In **Choose a Region**, choose an Amazon Web Services Region.
4. In **Cluster Configuration Option**, choose a configuration option.
5. Use the section for compatible instances to view the supported DB instance classes.
6. (Optional) Choose other options in the calculator, and then choose **Save and view summary** or **Save and add service**.

Using the Amazon CLI to determine DB instance class support in Amazon Web Services Regions

You can use the Amazon CLI to determine which DB instance classes are supported for specific DB engines and DB engine versions in an Amazon Web Services Region.

To use the Amazon CLI examples following, enter valid values for the DB engine, DB engine version, DB instance class, and Amazon Web Services Region. The following table shows the valid DB engine values.

Engine name	Engine value in CLI commands	More information about versions
MySQL 5.7-compatible and 8.0-compatible Aurora	`aurora-mysql`	Database engine updates for Amazon Aurora MySQL version 2 and Database engine updates for Amazon Aurora MySQL version 3 in the *Release Notes for Aurora MySQL*
Aurora PostgreSQL	`aurora-postgresql`	*Release Notes for Aurora PostgreSQL*

For information about Amazon Web Services Region names, see Amazon Regions.

The following examples demonstrate how to determine DB instance class support in an Amazon Web Services Region using the describe-orderable-db-instance-options Amazon CLI command.

Topics

- Listing the DB instance classes that are supported by a specific DB engine version in an Amazon Web Services Region
- Listing the DB engine versions that support a specific DB instance class in an Amazon Web Services Region

Listing the DB instance classes that are supported by a specific DB engine version in an Amazon Web Services Region

To list the DB instance classes that are supported by a specific DB engine version in an Amazon Web Services Region, run the following command.

For Linux, macOS, or Unix:

```
aws rds describe-orderable-db-instance-options --engine engine --engine-version version
 \
    --query "OrderableDBInstanceOptions[].
{DBInstanceClass:DBInstanceClass,SupportedEngineModes:SupportedEngineModes[0]}" \
    --output table \
    --region region
```

For Windows:

```
aws rds describe-orderable-db-instance-options --engine engine --engine-version version
 ^
    --query "OrderableDBInstanceOptions[].
{DBInstanceClass:DBInstanceClass,SupportedEngineModes:SupportedEngineModes[0]}" ^
    --output table ^
    --region region
```

The output also shows the engine modes that are supported for each DB instance class.

For example, the following command lists the supported DB instance classes for version 13.6 of the Aurora PostgreSQL DB engine in US East (N. Virginia).

For Linux, macOS, or Unix:

```
aws rds describe-orderable-db-instance-options --engine aurora-postgresql --engine-
version 15.3 \
    --query "OrderableDBInstanceOptions[].
{DBInstanceClass:DBInstanceClass,SupportedEngineModes:SupportedEngineModes[0]}" \
    --output table \
    --region us-east-1
```

For Windows:

```
aws rds describe-orderable-db-instance-options --engine aurora-postgresql --engine-
version 15.3 ^
    --query "OrderableDBInstanceOptions[].
{DBInstanceClass:DBInstanceClass,SupportedEngineModes:SupportedEngineModes[0]}"  ^
    --output table ^
    --region us-east-1
```

Listing the DB engine versions that support a specific DB instance class in an Amazon Web Services Region

To list the DB engine versions that support a specific DB instance class in an Amazon Web Services Region, run the following command.

For Linux, macOS, or Unix:

```
aws rds describe-orderable-db-instance-options --engine engine --db-instance-
class DB_instance_class \
```

```
    --query "OrderableDBInstanceOptions[].
{EngineVersion:EngineVersion,SupportedEngineModes:SupportedEngineModes[0]}" \
    --output table \
    --region region
```

For Windows:

```
aws rds describe-orderable-db-instance-options --engine engine --db-instance-
class DB_instance_class ^
    --query "OrderableDBInstanceOptions[].
{EngineVersion:EngineVersion,SupportedEngineModes:SupportedEngineModes[0]}" ^
    --output table ^
    --region region
```

The output also shows the engine modes that are supported for each DB engine version.

For example, the following command lists the DB engine versions of the Aurora PostgreSQL DB engine that support the db.r5.large DB instance class in US East (N. Virginia).

For Linux, macOS, or Unix:

```
aws rds describe-orderable-db-instance-options --engine aurora-postgresql --db-
instance-class db.r7g.large \
    --query "OrderableDBInstanceOptions[].
{EngineVersion:EngineVersion,SupportedEngineModes:SupportedEngineModes[0]}" \
    --output table \
    --region us-east-1
```

For Windows:

```
aws rds describe-orderable-db-instance-options --engine aurora-postgresql --db-
instance-class db.r7g.large ^
    --query "OrderableDBInstanceOptions[].
{EngineVersion:EngineVersion,SupportedEngineModes:SupportedEngineModes[0]}" ^
    --output table ^
    --region us-east-1
```

Hardware specifications for DB instance classes for Aurora

In the table in this section, you can find hardware details about the Amazon RDS DB instance classes for Aurora.

For information about Aurora DB engine support for each DB instance class, see Supported DB engines for DB instance classes.

Topics

- Hardware terminology for DB instance classes for Aurora
- Hardware specifications for the memory-optimized instance classes
- Hardware specifications for the burstable-performance instance classes

Hardware terminology for DB instance classes for Aurora

The following terminology is used to describe hardware specifications for DB instance classes:

vCPU

The number of virtual central processing units (CPUs). A *virtual CPU* is a unit of capacity that you can use to compare DB instance classes. Instead of purchasing or leasing a particular processor to use for several months or years, you are renting capacity by the hour. Our goal is to make a consistent and specific amount of CPU capacity available, within the limits of the actual underlying hardware.

ECU

The relative measure of the integer processing power of an Amazon EC2 instance. To make it easy for developers to compare CPU capacity between different instance classes, we have defined an Amazon EC2 Compute Unit. The amount of CPU that is allocated to a particular instance is expressed in terms of these EC2 Compute Units. One ECU currently provides CPU capacity equivalent to a 1.0–1.2 GHz 2007 Opteron or 2007 Xeon processor.

Memory (GiB)

The RAM, in gibibytes, allocated to the DB instance. There is often a consistent ratio between memory and vCPU. As an example, take the db.r4 instance class, which has a memory to vCPU ratio similar to the db.r5 instance class. However, for most use cases the db.r5 instance class provides better, more consistent performance than the db.r4 instance class.

Max. EBS bandwidth (Mbps)

The maximum EBS bandwidth in megabits per second. Divide by 8 to get the expected throughput in megabytes per second.

> **Note**
>
> This figure refers to I/O bandwidth for local storage within the DB instance. It doesn't apply to communication with the Aurora cluster volume.

Network bandwidth

The network speed relative to other DB instance classes.

For information on using Amazon CloudWatch metrics to monitor your Aurora DB instance throughput, see Evaluating DB instance usage for Aurora MySQL with Amazon CloudWatch metrics and Evaluating DB instance usage for Aurora PostgreSQL with CloudWatch metrics.

Hardware specifications for the memory-optimized instance classes

The following tables show the compute, memory, storage, and bandwidth specifications for the memory-optimized instance classes.

db.x2g – memory-optimized instance classes with Amazon Graviton2 processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.x2g.16xlarge	64	—	1024	EBS-optimized only	19,000	25
db.x2g.12xlarge	48	—	768	EBS-optimized only	14,250	20
db.x2g.8xlarge	32	—	512	EBS-optimized only	9,500	12
db.x2g.4xlarge	16	—	256	EBS-optimized only	4,750	Up to 10
db.x2g.2xlarge	8	—	128	EBS-optimized only	Up to 4,750	Up to 10

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.x2g.xlarge	4	—	64	EBS-optimized only	Up to 4,750	Up to 10
db.x2g.large	2	—	32	EBS-optimized only	Up to 4,750	Up to 10

db.r8gd – memory-optimized instance classes powered by Amazon Graviton4 processors and SSD storage

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r8gd.48xlarge	192	—	1536	6 x 1900 NVMe SSD	40,000	50
db.r8gd.24xlarge	96	—	768	3 x 1900 NVMe SSD	30,000	40
db.r8gd.16xlarge	64	—	512	2 x 1900 NVMe SSD	20,000	30
db.r8gd.12xlarge	48	—	384	3 x 950 NVMe SSD	15,000	22.5
db.r8gd.8xlarge	32	—	256	1 x 1900 NVMe SSD	10,000	15
db.r8gd.4xlarge	16	—	128	1 x 950 NVMe SSD	Up to 10,000	Up to 15
db.r8gd.2xlarge	8	—	64	1 x 474 NVMe SSD	Up to 10,000	Up to 15

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r8gd.xlarge	4	—	32	1 x 237 NVMe SSD	Up to 10,000	Up to 12.5
db.r8gd.large	2	—	16	1 x 118 NVMe SSD	Up to 10,000	Up to 12.5

db.r8a – memory-optimized instance classes powered by 5th Generation AMD EPYC processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r8a.48xlarge	192	—	1536	EBS-optimized only	60,000	75
db.r8a.24xlarge	96	—	768	EBS-optimized only	30,000	40
db.r8a.16xlarge	64	—	512	EBS-optimized only	20,000	30
db.r8a.12xlarge	48	—	384	EBS-optimized only	15,000	22.5
db.r8a.8xlarge	32	—	256	EBS-optimized only	10,000	15
db.r8a.4xlarge	16	—	128	EBS-optimized only	Up to 10,000	Up to 15
db.r8a.2xlarge	8	—	64	EBS-optimized only	Up to 10,000	Up to 15

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r8a.xlarge	4	—	32	EBS-optimized only	Up to 10,000	Up to 12.5
db.r8a.large	2	—	16	EBS-optimized only	Up to 10,000	Up to 12.5

db.r9g – memory-optimized instance classes powered by Amazon Graviton5 processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r9g.48xlarge	192	—	1536	EBS-optimized only	72,000	100
db.r9g.24xlarge	96	—	768	EBS-optimized only	36,000	50
db.r9g.16xlarge	64	—	512	EBS-optimized only	24,000	34
db.r9g.12xlarge	48	—	384	EBS-optimized only	18,000	25
db.r9g.8xlarge	32	—	256	EBS-optimized only	12,000	17
db.r9g.4xlarge	16	—	128	EBS-optimized only	Up to 12,000	Up to 17
db.r9g.2xlarge	8	—	64	EBS-optimized only	Up to 12,000	Up to 17

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r9g.xlarge	4	—	32	EBS-optimized only	Up to 12,000	Up to 15
db.r9g.large	2	—	16	EBS-optimized only	Up to 12,000	Up to 15

db.r8g – memory-optimized instance classes powered by Amazon Graviton4 processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r8g.48xlarge	192	—	1536	EBS-optimized only	40,000	50
db.r8g.24xlarge	96	—	768	EBS-optimized only	30,000	40
db.r8g.16xlarge	64	—	512	EBS-optimized only	20,000	30
db.r8g.12xlarge	48	—	384	EBS-optimized only	15,000	22.5
db.r8g.8xlarge	32	—	256	EBS-optimized only	10,000	15
db.r8g.4xlarge	16	—	128	EBS-optimized only	Up to 10,000	Up to 15
db.r8g.2xlarge	8	—	64	EBS-optimized only	Up to 10,000	Up to 15

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r8g.xlarge	4	—	32	EBS-optimized only	Up to 10,000	Up to 12.5
db.r8g.large	2	—	16	EBS-optimized only	Up to 10,000	Up to 12.5

db.r7i – memory-optimized instance classes powered by 4th generation Intel Xeon Scalable processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r7i.48xlarge	192	—	1536	EBS-optimized only	40,000	50
db.r7i.24xlarge	96	—	768	EBS-optimized only	30,000	37.5
db.r7i.16xlarge	64	—	512	EBS-optimized only	20,000	25
db.r7i.12xlarge	48	—	384	EBS-optimized only	15,000	18.75
db.r7i.8xlarge	32	—	256	EBS-optimized only	10,000	12.5
db.r7i.4xlarge	16	—	128	EBS-optimized only	Up to 10,000	Up to 12.5
db.r7i.2xlarge	8	—	64	EBS-optimized only	Up to 10,000	Up to 12.5

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r7i.xlarge	4	—	32	EBS-optimized only	Up to 10,000	Up to 12.5
db.r7i.large	2	—	16	EBS-optimized only	Up to 10,000	Up to 12.5

db.r7g – memory-optimized instance classes with Amazon Graviton3 processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r7g.16xlarge	64	—	512	EBS-optimized only	20,000	30
db.r7g.12xlarge	48	—	384	EBS-optimized only	15,000	22.5
db.r7g.8xlarge	32	—	256	EBS-optimized only	10,000	15
db.r7g.4xlarge	16	—	128	EBS-optimized only	Up to 10,000	Up to 15
db.r7g.2xlarge	8	—	64	EBS-optimized only	Up to 10,000	Up to 15
db.r7g.xlarge	4	—	32	EBS-optimized only	Up to 10,000	Up to 12.5
db.r7g.large	2	—	16	EBS-optimized only	Up to 10,000	Up to 12.5

db.r6id – memory-optimized instance classes with 3rd generation Intel Xeon Scalable processors and SSD storage

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r6id.32xlarge	128	—	1,024	4x1900 NVMe SSD	40,000	50
db.r6id.24xlarge	96	—	768	4x1425 NVMe SSD	30,000	37.5

db.r6gd – memory-optimized instance classes with Amazon Graviton2 processors and SSD storage

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r6gd.16xlarge	64	—	512	2 x 1900 NVMe SSD	19,000	25
db.r6gd.12xlarge	48	—	384	2 x 1425 NVMe SSD	13,500	20
db.r6gd.8xlarge	32	—	256	1 x 1900 NVMe SSD	9,000	12
db.r6gd.4xlarge	16	—	128	1 x 950 NVMe SSD	4,750	Up to 10
db.r6gd.2xlarge	8	—	64	1 x 474 NVMe SSD	Up to 4,750	Up to 10
db.r6gd.xlarge	4	—	32	1 x 237 NVMe SSD	Up to 4,750	Up to 10

db.r6g – memory-optimized instance classes with Amazon Graviton2 processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r6g.16xlarge	64	—	512	EBS-optimized only	19,000	25
db.r6g.12xlarge	48	—	384	EBS-optimized only	13,500	20
db.r6g.8xlarge	32	—	256	EBS-optimized only	9,000	12
db.r6g.4xlarge	16	—	128	EBS-optimized only	4,750	Up to 10
db.r6g.2xlarge	8	—	64	EBS-optimized only	Up to 4,750	Up to 10
db.r6g.xlarge	4	—	32	EBS-optimized only	Up to 4,750	Up to 10
db.r6g.large	2	—	16	EBS-optimized only	Up to 4,750	Up to 10

db.r6i – memory-optimized instance classes with 3rd Generation Intel Xeon Scalable processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r6i.32xlarge	128	—	1,024	EBS-optimized only	40,000	50
db.r6i.24xlarge	96	—	768	EBS-optimized only	30,000	37.5

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r6i.16xlarge	64	—	512	EBS-optimized only	20,000	25
db.r6i.12xlarge	48	—	384	EBS-optimized only	15,000	18.75
db.r6i.8xlarge	32	—	256	EBS-optimized only	10,000	12.5
db.r6i.4xlarge	16	—	128	EBS-optimized only	Up to 10,000	Up to 12.5
db.r6i.2xlarge	8	—	64	EBS-optimized only	Up to 10,000	Up to 12.5
db.r6i.xlarge	4	—	32	EBS-optimized only	Up to 10,000	Up to 12.5
db.r6i.large	2	—	16	EBS-optimized only	Up to 10,000	Up to 12.5

db.r5 – memory-optimized instance classes

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r5.24xlarge	96	347	768	EBS-optimized only	19,000	25
db.r5.16xlarge	64	264	512	EBS-optimized only	13,600	20

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r5.12xlarge	48	173	384	EBS-optimized only	9,500	10
db.r5.8xlarge	32	132	256	EBS-optimized only	6,800	10
db.r5.4xlarge	16	71	128	EBS-optimized only	4,750	Up to 10
db.r5.2xlarge	8	38	64	EBS-optimized only	Up to 4,750	Up to 10
db.r5.xlarge	4	19	32	EBS-optimized only	Up to 4,750	Up to 10
db.r5.large	2	10	16	EBS-optimized only	Up to 4,750	Up to 10

db.r4 – memory-optimized instance classes with Intel Xeon Scalable processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r4.16xlarge	64	195	488	EBS-optimized only	14,000	25
db.r4.8xlarge	32	99	244	EBS-optimized only	7,000	10
db.r4.4xlarge	16	53	122	EBS-optimized only	3,500	Up to 10

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.r4.2xlarge	8	27	61	EBS-optimized only	1,700	Up to 10
db.r4.xlarge	4	13.5	30.5	EBS-optimized only	850	Up to 10
db.r4.large	2	7	15.25	EBS-optimized only	425	Up to 10

Hardware specifications for the burstable-performance instance classes

The following tables show the compute, memory, storage, and bandwidth specifications for the burstable-performance instance classes.

db.t4g – burstable-performance instance classes powered by Amazon Graviton2 processors

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.t4g.large	2	—	8	EBS-optimized only	Up to 2,780	Up to 5
db.t4g.medium	2	—	4	EBS-optimized only	Up to 2,085	Up to 5

db.t3 – burstable-performance instance classes

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.t3.large	2	Variab	8	EBS-optimized only	Up to 2,048	Up to 5
db.t3.medium	2	Variab	4	EBS-optimized only	Up to 1,536	Up to 5
db.t3.small	2	Variab	2	EBS-optimized only	Up to 1,536	Up to 5

db.t2 – burstable-performance instance classes

Instance class	vCPU	ECU	Memory (GiB)	Instance storage (GiB)	Max. EBS bandwidth (Mbps)	Network bandwidth (Gbps)
db.t2.medium	2	Variab	4	EBS only	—	Moderate
db.t2.small	1	Variab	2	EBS only	—	Low

Amazon Aurora storage

Following, you can learn about the Aurora storage subsystem. Aurora uses a distributed and shared storage architecture that is an important factor in performance, scalability, and reliability for Aurora clusters.

Topics

- Overview of Amazon Aurora storage
- What the cluster volume contains
- Storage configurations for Amazon Aurora DB clusters
- How Aurora storage automatically resizes
- How Aurora data storage is billed

Overview of Amazon Aurora storage

Aurora data is stored in the *cluster volume*, which is a single, virtual volume that uses solid state drives (SSDs). A cluster volume consists of copies of the data across three Availability Zones in a single Amazon Region. Because the data is automatically replicated across Availability Zones, your data is highly durable with less possibility of data loss. This replication also ensures that your database is more available during a failover. It does so because the data copies already exist in the other Availability Zones and continue to serve data requests to the DB instances in your DB cluster. The amount of replication is independent of the number of DB instances in your cluster.

Aurora uses separate local storage for nonpersistent, temporary files. This includes files that are used for such purposes as sorting large data sets during query processing, and building indexes. For more information, see Temporary storage limits for Aurora MySQL and Temporary storage limits for Aurora PostgreSQL.

What the cluster volume contains

The Aurora cluster volume contains all your user data, schema objects, and internal metadata such as the system tables and the binary log. For example, Aurora stores all the tables, indexes, binary large objects (BLOBs), stored procedures, and so on for an Aurora cluster in the cluster volume.

The Aurora shared storage architecture makes your data independent from the DB instances in the cluster. For example, you can add a DB instance quickly because Aurora doesn't make a new copy of the table data. Instead, the DB instance connects to the shared volume that already contains all your data. You can remove a DB instance from a cluster without removing any of the underlying data from the cluster. Only when you delete the entire cluster does Aurora remove the data.

Storage configurations for Amazon Aurora DB clusters

Amazon Aurora has two DB cluster storage configurations:

- **Aurora I/O-Optimized** – Improved price performance and predictability for I/O-intensive applications. You pay only for the usage and storage of your DB clusters, with no additional charges for read and write I/O operations.

  Aurora I/O-Optimized is the best choice when your I/O spending is 25% or more of your total Aurora database spending.

You can choose Aurora I/O-Optimized when you create or modify a DB cluster with a DB engine version that supports the Aurora I/O-Optimized cluster configuration. You can switch from Aurora I/O-Optimized to Aurora Standard at any time.

- **Aurora Standard** – Cost-effective pricing for many applications with moderate I/O usage. In addition to the usage and storage of your DB clusters, you also pay a standard rate per 1 million requests for I/O operations.

  Aurora Standard is the best choice when your I/O spending is less than 25% of your total Aurora database spending.

  You can switch from Aurora Standard to Aurora I/O-Optimized once every 30 days. When you switch between Aurora Standard and Aurora I/O-Optimized storage options for non-NVMe-based DB instances, there is no downtime. Aurora serverless instances are non-NVMe-based DB instances, so there is no downtime and no reboot required when switching from Aurora Standard to Aurora I/O-Optimized. However, for NVMe-based DB instances, switching between Aurora I/O-Optimized and Aurora Standard storage options requires a database engine restart, which may cause a brief period of downtime.

For information on Amazon Web Services Region and version support, see Supported Regions and Aurora DB engines for cluster storage configurations.

For more information on pricing for Amazon Aurora storage configurations, see Amazon Aurora pricing.

For information on choosing the storage configuration when creating a DB cluster, see Creating a DB cluster. For information on modifying the storage configuration for a DB cluster, see Settings for Amazon Aurora.

How Aurora storage automatically resizes

Aurora cluster volumes automatically grow as the amount of data in your database increases. For information about maximum Aurora cluster volume sizes for each engine version, see Amazon Aurora size limits. This automatic storage scaling is combined with a high-performance and highly distributed storage subsystem. These make Aurora a good choice for your important enterprise data when your main objectives are reliability and high availability.

To display the volume status, see Displaying volume status for an Aurora MySQL DB cluster or Displaying volume status for an Aurora PostgreSQL DB cluster. For ways to balance storage costs

against other priorities, Storage scaling describes how to monitor the Amazon Aurora metrics `AuroraVolumeBytesLeftTotal` and `VolumeBytesUsed` in CloudWatch.

When Aurora data is removed, the space allocated for that data is freed. Examples of removing data include dropping or truncating a table. This automatic reduction in storage usage helps you to minimize storage charges.

> **Note**
>
> The storage limits and dynamic resizing behavior discussed here apply to persistent tables and other data stored in the cluster volume.
> For Aurora PostgreSQL, temporary table data is stored in the local DB instance.
> For Aurora MySQL version 2, temporary table data is stored by default in the cluster volume for writer instances and in local storage for reader instances. For more information, see Storage engine for on-disk temporary tables.
> For Aurora MySQL version 3, temporary table data is stored in the local DB instance or in the cluster volume. For more information, see New temporary table behavior in Aurora MySQL version 3.
> The maximum size of temporary tables that reside in local storage is limited by the maximum local storage size of the DB instance. The local storage size depends on the instance class that you use. For more information, see Temporary storage limits for Aurora MySQL and Temporary storage limits for Aurora PostgreSQL.

Some storage features, such as the maximum size of a cluster volume and automatic resizing when data is removed, depend on the Aurora version of your cluster. For more information, see Storage scaling. You can also learn how to avoid storage issues and how to monitor the allocated storage and free space in your cluster.

How Aurora data storage is billed

Even though an Aurora cluster volume can grow up to 256 tebibytes (TiB) for specific engine versions, you are only charged for the space that you use in an Aurora cluster volume. In earlier Aurora versions, the cluster volume could reuse space that was freed up when you removed data, but the allocated storage space would never decrease. Now when Aurora data is removed, such as by dropping a table or database, the overall allocated space decreases by a comparable amount. Thus, you can reduce storage charges by dropping tables, indexes, databases, and so on that you no longer need.

Tip

For earlier versions without the dynamic resizing feature, resetting the storage usage for a cluster involved doing a logical dump and restoring to a new cluster. That operation can take a long time for a substantial volume of data. If you encounter this situation, consider upgrading your cluster to a version that supports dynamic volume resizing.

For information about which Aurora versions support dynamic resizing, and how to minimize storage charges by monitoring storage usage for your cluster, see Storage scaling. For information about Aurora backup storage billing, see Understanding Amazon Aurora backup storage usage. For pricing information about Aurora data storage, see Amazon RDS for Aurora pricing.

Amazon Aurora reliability

Aurora is designed to be reliable, durable, and fault tolerant. You can architect your Aurora DB cluster to improve availability by doing things such as adding Aurora Replicas and placing them in different Availability Zones, and also Aurora includes several automatic features that make it a reliable database solution.

Topics

- Storage auto-repair
- Survivable page cache
- Recovery from unplanned restarts

Storage auto-repair

Because Aurora maintains multiple copies of your data in three Availability Zones, the chance of losing data as a result of a disk failure is greatly minimized. Aurora automatically detects failures in the disk volumes that make up the cluster volume. When a segment of a disk volume fails, Aurora immediately repairs the segment. When Aurora repairs the disk segment, it uses the data in the other volumes that make up the cluster volume to ensure that the data in the repaired segment is current. As a result, Aurora avoids data loss and reduces the need to perform a point-in-time restore to recover from a disk failure.

Survivable page cache

In Aurora, each DB instance's page cache is managed in a separate process from the database, which allows the page cache to survive independently of the database. (The page cache is also called the InnoDB *buffer pool* on Aurora MySQL and the *buffer cache* on Aurora PostgreSQL.)

In the unlikely event of a database failure, the page cache remains in memory, which keeps current data pages "warm" in the page cache when the database restarts. This provides a performance gain by bypassing the need for the initial queries to execute read I/O operations to "warm up" the page cache.

For Aurora MySQL, page cache behavior when rebooting and failing over is the following:

- You can reboot the writer instance without rebooting the reader instances.
  - If the reader instances don't reboot when the writer instance reboots, they don't lose their page caches.
  - If the reader instances reboot when the writer instance reboots, they do lose their page caches.
- When a reader instance reboots, the page caches on the writer and reader instances both survive.
- When the DB cluster fails over, the effect is similar to when a writer instance reboots. On the new writer instance (previously the reader instance) the page cache survives, but on the reader instance (previously the writer instance), the page cache doesn't survive.

For Aurora PostgreSQL, you can use cluster cache management to preserve the page cache of a designated reader instance that becomes the writer instance after failover. For more information, see Fast recovery after failover with cluster cache management for Aurora PostgreSQL.

Recovery from unplanned restarts

Aurora is designed to recover from an unplanned restart almost instantaneously and continue to serve your application data without the binary log. Aurora recovers asynchronously on parallel threads, so that your database is open and available immediately after an unplanned restart.

For more information, see Fault tolerance for an Aurora DB cluster and Optimizations to reduce database restart time.

The following are considerations for binary logging and unplanned restart recovery on Aurora MySQL:

- Enabling binary logging on Aurora directly affects the recovery time after an unplanned restart, because it forces the DB instance to perform binary log recovery.
- The type of binary logging used affects the size and efficiency of logging. For the same amount of database activity, some formats log more information than others in the binary logs. The following settings for the `binlog_format` parameter result in different amounts of log data:
  - `ROW` – The most log data
  - `STATEMENT` – The least log data
  - `MIXED` – A moderate amount of log data that usually provides the best combination of data integrity and performance

  The amount of binary log data affects recovery time. If there is more data logged in the binary logs, the DB instance must process more data during recovery, which increases recovery time.
- To reduce computational overhead and improve recovery times with binary logging, you can use enhanced binlog. Enhanced binlog improves the database recovery time by up to 99%. For more information, see Setting up enhanced binlog for Aurora MySQL.
- Aurora does not need the binary logs to replicate data within a DB cluster or to perform point-in-time restore (PITR).
- If you don't need the binary log for external replication (or an external binary log stream), we recommend that you set the `binlog_format` parameter to `OFF` to disable binary logging. Doing so reduces recovery time.

For more information about Aurora binary logging and replication, see Replication with Amazon Aurora. For more information about the implications of different MySQL replication types, see Advantages and disadvantages of statement-based and row-based replication in the MySQL documentation.

Amazon Aurora security

Security for Amazon Aurora is managed at three levels:

- To control who can perform Amazon RDS management actions on Aurora DB clusters and DB instances, you use Amazon Identity and Access Management (IAM). When you connect to Amazon using IAM credentials, your Amazon account must have IAM policies that grant the permissions required to perform Amazon RDS management operations. For more information, see Identity and access management for Amazon Aurora.

If you are using IAM to access the Amazon RDS console, you must first log on to the Amazon Web Services Management Console with your user credentials, and then go to the Amazon RDS console at https://console.amazonaws.cn/rds.

- Aurora DB clusters must be created in a virtual private cloud (VPC) based on the Amazon VPC service. To control which devices and Amazon EC2 instances can open connections to the endpoint and port of the DB instance for Aurora DB clusters in a VPC, you use a VPC security group. You can make these endpoint and port connections using Transport Layer Security (TLS)/ Secure Sockets Layer (SSL). In addition, firewall rules at your company can control whether devices running at your company can open connections to a DB instance. For more information on VPCs, see Amazon VPC and Amazon Aurora.
- To authenticate logins and permissions for an Amazon Aurora DB cluster, you can take either of the following approaches, or a combination of them.
  - You can take the same approach as with a stand-alone DB instance of MySQL or PostgreSQL.

    Techniques for authenticating logins and permissions for stand-alone DB instances of MySQL or PostgreSQL, such as using SQL commands or modifying database schema tables, also work with Aurora. For more information, see Security with Amazon Aurora MySQL or Security with Amazon Aurora PostgreSQL.
  - You can use IAM database authentication.

    With IAM database authentication, you authenticate to your Aurora DB cluster by using a user or IAM role and an authentication token. An *authentication token* is a unique value that is generated using the Signature Version 4 signing process. By using IAM database authentication, you can use the same credentials to control access to your Amazon resources and your databases. For more information, see IAM database authentication .
  - You can use Kerberos authentication for Aurora PostgreSQL and Aurora MySQL.

    You can use Kerberos to authenticate users when they connect to your Aurora PostgreSQL and Aurora MySQLDB cluster. In this case, your DB cluster works with Amazon Directory Service for Microsoft Active Directory to enable Kerberos authentication. Amazon Directory Service for Microsoft Active Directory is also called Amazon Managed Microsoft AD. Keeping all of your credentials in the same directory can save you time and effort. You have a centralized place for storing and managing credentials for multiple DB clusters. Using a directory can also improve your overall security profile. For more information, see Using Kerberos authentication with Aurora PostgreSQL and Using Kerberos authentication for Aurora MySQL.

For information about configuring security, see Security in Amazon Aurora.

Using SSL with Aurora DB clusters

Amazon Aurora DB clusters support Secure Sockets Layer (SSL) connections from applications using the same process and public key as Amazon RDS DB instances. For more information, see Security with Amazon Aurora MySQL or Security with Amazon Aurora PostgreSQL.

High availability for Amazon Aurora

The Amazon Aurora architecture involves separation of storage and compute. Aurora includes some high availability features that apply to the data in your DB cluster. The data remains safe even if some or all of the DB instances in the cluster become unavailable. Other high availability features apply to the DB instances. These features help to make sure that one or more DB instances are ready to handle database requests from your application.

Topics

- High availability for Aurora data
- High availability for Aurora DB instances
- High availability across Amazon Regions with Aurora global databases
- Fault tolerance for an Aurora DB cluster
- High availability with Amazon RDS Proxy

High availability for Aurora data

Aurora stores copies of the data in a DB cluster across multiple Availability Zones in a single Amazon Web Services Region. Aurora stores these copies regardless of whether the instances in the DB cluster span multiple Availability Zones. For more information on Aurora, see Managing an Amazon Aurora DB cluster.

When data is written to the primary DB instance, Aurora synchronously replicates the data across Availability Zones to six storage nodes associated with your cluster volume. Doing so provides data redundancy, eliminates I/O freezes, and minimizes latency spikes during system backups. Running a DB instance with high availability can enhance availability during planned system maintenance, and help protect your databases against failure and Availability Zone disruption. For more information on Availability Zones, see Regions and Availability Zones.

High availability for Aurora DB instances

After you create the primary (writer) instance, you can create up to 15 read-only Aurora Replicas. The Aurora Replicas are also known as reader instances. Aurora Replicas use asynchronous replication to support high availability without affecting primary instance performance.

During day-to-day operations, you can offload some of the work for read-intensive applications by using the reader instances to process SELECT queries. When a problem affects the primary instance, one of these reader instances takes over as the primary instance. This mechanism is known as *failover*. Many Aurora features apply to the failover mechanism. For example, Aurora detects database problems and activates the failover mechanism automatically when necessary. Aurora also has features that reduce the time for failover to complete. Doing so minimizes the time that the database is unavailable for writing during a failover.

Aurora is designed to recover as quickly as possible, and the fastest path to recovery is often to restart or to fail over to the same DB instance. Restarting is faster and involves less overhead than failover.

To use a connection string that stays the same even when a failover promotes a new primary instance, you connect to the cluster endpoint. The *cluster endpoint* always represents the current primary instance in the cluster. For more information about the cluster endpoint, see Amazon Aurora endpoint connections.

Tip

Within each Amazon Web Services Region, Availability Zones (AZs) represent locations that are distinct from each other to provide isolation in case of outages. We recommend that you distribute the primary instance and reader instances in your DB cluster over multiple AZs to improve the availability of your DB cluster. That way, an issue that affects an entire AZ doesn't cause an outage for your cluster.

You can set up a Multi-AZ DB cluster by making a simple choice when you create the cluster. You can use the Amazon Web Services Management Console, the Amazon CLI, or the Amazon RDS API. You can also convert an existing Aurora DB cluster into a Multi-AZ DB cluster by adding a new reader DB instance and specifying a different AZ.

High availability across Amazon Regions with Aurora global databases

For high availability across multiple Amazon Web Services Regions, you can set up Aurora global databases. Each Aurora global database spans multiple Amazon Web Services Regions, enabling low latency global reads and disaster recovery from outages across an Amazon Web Services Region. Aurora asynchronously replicates all data and updates from the primary Amazon Web Services Region to each of the secondary Regions. For more information, see Using Amazon Aurora Global Database.

Fault tolerance for an Aurora DB cluster

An Aurora DB cluster is fault tolerant by design. The cluster volume spans multiple Availability Zones (AZs) in a single Amazon Web Services Region, and each Availability Zone contains a copy of the cluster volume data. This functionality means that your DB cluster can tolerate a failure of an Availability Zone without any loss of data and only a brief interruption of service.

If the primary instance in a DB cluster fails, Aurora automatically fails over to a new primary instance in one of two ways:

- By promoting an existing Aurora Replica to the new primary instance
- By creating a new primary instance

If the DB cluster has one or more Aurora Replicas, then an Aurora Replica is promoted to the primary instance during a failure event. A failure event results in a brief interruption, during which read and write operations fail with an exception. However, service is typically restored in less than 60 seconds, and often less than 30 seconds. To increase the availability of your DB cluster, we recommend that you create at least one or more Aurora Replicas in two or more different Availability Zones.

> **Tip**
>
> In Aurora MySQL, you can improve availability during a failover by having more than one reader DB instance in a cluster. In Aurora MySQL, Aurora restarts only the writer DB instance and the reader instance to which it fails over. Other reader instances in the cluster remain available during a failover to continue processing queries through connections to the reader endpoint.

You can also improve availability during a failover by using RDS Proxy with your Aurora DB cluster. For more information, see High availability with Amazon RDS Proxy.

You can customize the order in which your Aurora Replicas are promoted to the primary instance after a failure by assigning each replica a priority. Priorities range from 0 for the highest priority to 15 for the lowest priority. If the primary instance fails, Amazon RDS promotes the Aurora Replica with the highest priority to the new primary instance. You can modify the priority of an Aurora Replica at any time. Modifying the priority doesn't trigger a failover.

More than one Aurora Replica can share the same priority, resulting in promotion tiers. If two or more Aurora Replicas share the same priority, then Amazon RDS promotes the replica that is largest in size. If two or more Aurora Replicas share the same priority and size, then Amazon RDS promotes an arbitrary replica in the same promotion tier.

Note

Several factors are involved in identifying a failover target. After five unsuccessful failover attempts, promotion tiers are no longer considered.

If the DB cluster doesn't contain any Aurora Replicas, then the primary instance is recreated in the same AZ during a failure event. A failure event results in an interruption during which read and write operations fail with an exception. Service is restored when the new primary instance is created, which typically takes less than 10 minutes. Promoting an Aurora Replica to the primary instance is much faster than creating a new primary instance.

Suppose that the primary instance in your cluster is unavailable because of an outage that affects an entire AZ. In this case, the way to bring a new primary instance online depends on whether your cluster uses a Multi-AZ configuration:

- If your provisioned or Aurora serverless cluster contains any reader instances in other AZs, Aurora uses the failover mechanism to promote one of those reader instances to be the new primary instance.
- If your provisioned or Aurora serverless cluster only contains a single DB instance, or if the primary instance and all reader instances are in the same AZ, make sure to manually create one or more new DB instances in another AZ.

> **Note**
>
> Amazon Aurora also supports replication with an external MySQL database, or an RDS MySQL DB instance. For more information, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

High availability with Amazon RDS Proxy

With RDS Proxy, you can build applications that can transparently tolerate database failures without needing to write complex failure handling code. The proxy automatically routes traffic to a new database instance while preserving application connections. It also bypasses Domain Name System (DNS) caches to reduce failover times by up to 66% for Aurora Multi-AZ databases. For more information, see Amazon RDS Proxy for Aurora.

Replication with Amazon Aurora

There are several replication options with Aurora. Each Aurora DB cluster has built-in replication between multiple DB instances in the same cluster. You can also set up replication with your Aurora cluster as the source or the target. When you replicate data into or out of an Aurora cluster, you can choose between built-in features such as Aurora global databases or the traditional replication mechanisms for the MySQL or PostgreSQL DB engines. You can choose the appropriate options based on which one provides the right combination of high availability, convenience, and performance for your needs. The following sections explain how and when to choose each technique.

Topics

- Aurora Replicas
- Replication with Aurora MySQL
- Replication with Aurora PostgreSQL

Aurora Replicas

When you create a second, third, and so on DB instance in an Aurora provisioned DB cluster, Aurora automatically sets up replication from the writer DB instance to all the other DB instances. These other DB instances are read-only and are known as Aurora Replicas. We also refer to them as reader

instances when discussing the ways that you can combine writer and reader DB instances within a cluster.

Aurora Replicas have two main purposes. You can issue queries to them to scale the read operations for your application. You typically do so by connecting to the reader endpoint of the cluster. That way, Aurora can spread the load for read-only connections across as many Aurora Replicas as you have in the cluster. Aurora Replicas also help to increase availability. If the writer instance in a cluster becomes unavailable, Aurora automatically promotes one of the reader instances to take its place as the new writer.

An Aurora DB cluster can contain up to 15 Aurora Replicas. The Aurora Replicas can be distributed across the Availability Zones that a DB cluster spans within an Amazon Region.

The data in your DB cluster has its own high availability and reliability features, independent of the DB instances in the cluster. If you aren't familiar with Aurora storage features, see Overview of Amazon Aurora storage. The DB cluster volume is physically made up of multiple copies of the data for the DB cluster. The primary instance and the Aurora Replicas in the DB cluster all see the data in the cluster volume as a single logical volume.

As a result, all Aurora Replicas return the same data for query results with minimal replica lag. This lag is usually much less than 100 milliseconds after the primary instance has written an update. Replica lag varies depending on the rate of database change. That is, during periods where a large amount of write operations occur for the database, you might see an increase in replica lag.

Note

Aurora Replica restarts automatically, when it loses communication with the writer DB instance for more than 60 seconds in the following Aurora PostgreSQL versions:

- 14.6 and older versions
- 13.9 and older versions
- 12.13 and older versions
- All Aurora PostgreSQL 11 versions

With the read availability feature, the Aurora Replicas don't restart automatically. For more information on the read availability feature and the versions where it is applicable, see Improving the read availability of Aurora Replicas.

Aurora Replicas work well for read scaling because they are fully dedicated to read operations on your cluster volume. Write operations are managed by the primary instance. Because the cluster volume is shared among all DB instances in your DB cluster, minimal additional work is required to replicate a copy of the data for each Aurora Replica.

To increase availability, you can use Aurora Replicas as failover targets. That is, if the primary instance fails, an Aurora Replica is promoted to the primary instance. There is a brief interruption during which read and write requests made to the primary instance fail with an exception.

Promoting an Aurora Replica by failover is much faster than recreating the primary instance. If your Aurora DB cluster doesn't include any Aurora Replicas, then your DB cluster isn't available while your DB instance is recovering from the failure.

When failover happens, some of the Aurora Replicas might be rebooted, depending on the DB engine version. For example, in Aurora MySQL, Aurora restarts only the writer DB instance and the failover target during a failover. For more information about the rebooting behavior of different Aurora DB engine versions, see Rebooting an Amazon Aurora DB cluster or Amazon Aurora DB instance. For information about what happens to page caches when rebooting or failover, see Survivable page cache.

For high-availability scenarios, we recommend that you create one or more Aurora Replicas. These should be of the same DB instance class as the primary instance and in different Availability Zones for your Aurora DB cluster. For more information about Aurora Replicas as failover targets, see Fault tolerance for an Aurora DB cluster.

You can't create an encrypted Aurora Replica for an unencrypted Aurora DB cluster. You can't create an unencrypted Aurora Replica for an encrypted Aurora DB cluster.

Tip

You can use Aurora Replicas within an Aurora cluster as your only form of replication to keep your data highly available. You can also combine the built-in Aurora replication with the other types of replication. Doing so can help to provide an extra level of high availability and geographic distribution of your data.

For details on how to create an Aurora Replica, see Adding Aurora Replicas to a DB cluster.

Replication with Aurora MySQL

In addition to Aurora Replicas, you have the following options for replication with Aurora MySQL:

- Aurora MySQL DB clusters in different Amazon Regions.
  - You can replicate data across multiple Regions by using an Aurora global database. For details, see High availability across Amazon Regions with Aurora global databases
  - You can create an Aurora read replica of an Aurora MySQL DB cluster in a different Amazon Region, by using MySQL binary log (binlog) replication. Each cluster can have up to five read replicas created this way, each in a different Region.
- Two Aurora MySQL DB clusters in the same Region, by using MySQL binary log (binlog) replication.
- An RDS for MySQL DB instance as the source of data and an Aurora MySQL DB cluster, by creating an Aurora read replica of an RDS for MySQL DB instance. Typically, you use this approach for migration to Aurora MySQL, rather than for ongoing replication.

For more information about replication with Aurora MySQL, see Replication with Amazon Aurora MySQL.

Replication with Aurora PostgreSQL

In addition to Aurora Replicas, you have the following options for replication with Aurora PostgreSQL:

- An Aurora primary DB cluster in one Region and up to 10 read-only secondary DB clusters in different Regions by using an Aurora global database. Aurora PostgreSQL doesn't support cross-Region Aurora Replicas. However, you can use Aurora global database to scale your Aurora PostgreSQL DB cluster's read capabilities to more than one Amazon Region and to meet availability goals. For more information, see Using Amazon Aurora Global Database.
- Two Aurora PostgreSQL DB clusters in the same Region, by using PostgreSQL's logical replication feature.
- An RDS for PostgreSQL DB instance as the source of data and an Aurora PostgreSQL DB cluster, by creating an Aurora read replica of an RDS for PostgreSQL DB instance. Typically, you use this approach for migration to Aurora PostgreSQL, rather than for ongoing replication.

For more information about replication with Aurora PostgreSQL, see Replication with Amazon Aurora PostgreSQL.

DB instance billing for Aurora

Amazon RDS provisioned instances in an Amazon Aurora cluster are billed based on the following components:

- DB instance hours (per hour) – Based on the DB instance class of the DB instance (for example, db.t2.small or db.m4.large). Pricing is listed on a per-hour basis, but bills are calculated down to the second and show times in decimal form. RDS usage is billed in 1-second increments, with a minimum of 10 minutes. For more information, see Amazon AuroraDB instance classes.
- Storage (per GiB per month) – Storage capacity that you have provisioned to your DB instance. If you scale your provisioned storage capacity within the month, your bill is prorated. For more information, see Amazon Aurora storage.
- Input/output (I/O) requests (per 1 million requests) – Total number of storage I/O requests that you have made in a billing cycle, for the Aurora Standard DB cluster configuration only.

  For more information on Amazon Aurora I/O billing, see Storage configurations for Amazon Aurora DB clusters.
- Backup storage (per GiB per month) – *Backup storage* is the storage that is associated with automated database backups and any manual database snapshots that you have taken. Increasing your backup retention period or taking additional database snapshots increases the backup storage consumed by your database. Per second billing doesn't apply to backup storage (metered in GB-month).

  For more information, see Backing up and restoring an Amazon Aurora DB cluster.
- Data transfer (per GB) – Data transfer in and out of your DB instance from or to the internet and other Amazon Regions. For useful examples, see the Amazon blog post Exploring Data Transfer Costs for Amazon Managed Databases.

Amazon RDS provides the following purchasing options to enable you to optimize your costs based on your needs:

- **On-Demand instances** – Pay by the hour for the DB instance hours that you use. Pricing is listed on a per-hour basis, but bills are calculated down to the second and show times in decimal form. RDS usage is now billed in 1-second increments, with a minimum of 10 minutes.

- **Reserved instances** – Reserve a DB instance for a one-year or three-year term and get a significant discount compared to the on-demand DB instance pricing. With Reserved Instance usage, you can launch, delete, start, or stop multiple instances within an hour and get the Reserved Instance benefit for all of the instances.
- **Aurora serverless** – Aurora serverless provides on-demand capacity where the billing unit is Aurora capacity unit (ACU) hours instead of DB instance hours. Aurora serverless capacity increases and decreases, within a range that you specify, depending on the load on your database. You can configure a cluster where all the capacity is Aurora serverless. Or you can configure a combination of Aurora serverless and on-demand or reserved provisioned instances. For information about how Aurora serverless ACUs work, see How Aurora serverless works.
- **Aurora PostgreSQL Limitless Database** – Aurora PostgreSQL Limitless Database is an automated, horizontal scaling capability that scales beyond the write throughput and storage limits of a single DB instance. Limitless Database distributes the workload over multiple Aurora writer instances, while maintaining the ease of operating as a single database. Limitless Database provides on-demand capacity where the billing unit is Aurora capacity unit (ACU) hours in a DB shard group. For information about how Limitless Database ACUs work, see Creating a DB cluster that uses Aurora PostgreSQL Limitless Database.

For Aurora pricing information, see the Aurora pricing page.

Topics

- On-Demand DB instances for Aurora
- Reserved DB instances for Amazon Aurora

On-Demand DB instances for Aurora

Amazon RDS on-demand DB instances are billed based on the class of the DB instance (for example, db.t3.small or db.m5.large). For Amazon RDS pricing information, see the Amazon RDS product page.

Billing starts for a DB instance as soon as the DB instance is available. Pricing is listed on a per-hour basis, but bills are calculated down to the second and show times in decimal form. Amazon RDS usage is billed in one-second increments, with a minimum of 10 minutes. In the case of billable configuration change, such as scaling compute or storage capacity, you're charged a 10-minute minimum. Billing continues until the DB instance terminates, which occurs when you delete the DB instance or if the DB instance fails.

If you no longer want to be charged for your DB instance, you must stop or delete it to avoid being billed for additional DB instance hours. For more information about the DB instance states for which you are billed, see Viewing DB instance statusin an Aurora cluster.

Stopped DB instances

While your DB instance is stopped, you're charged for provisioned storage, including Provisioned IOPS. You are also charged for backup storage, including storage for manual snapshots and automated backups within your specified retention window. You aren't charged for DB instance hours.

Multi-AZ DB instances

A Multi-AZ setup enhances data durability and availability by automatically provisioning and maintaining a synchronous standby replica in a different Availability Zone. Due to the additional resources and increased availability, Multi-AZ deployments are priced higher than Single-AZ deployments, and can cost approximately twice as much due to the additional standby instance and associated resources.

Consider the following important details about Multi-AZ pricing:

- **Compute costs**: Billed per DB instance-hour for both the primary and standby instances.
- **Storage costs**: Charged per GB-month for the storage provisioned for both the primary and standby instances.
- **Data transfer costs**: Replication between the primary and standby instances is included in the cost, but other data transfer charges might apply based on your usage.

To accurately estimate your monthly costs based on your specific use case and Amazon Web Services Region, you can use the Amazon Pricing Calculator. This tool lets you to input your configuration details and provides a comprehensive cost breakdown.

> **Note**
>
> Pricing is subject to change. See the Amazon RDS Pricing page for the most up-to-date information.

Reserved DB instances for Amazon Aurora

Using reserved DB instances, you can reserve a DB instance for a one- or three-year term. Reserved DB instances provide you with a significant discount compared to on-demand DB instance pricing. Reserved DB instances are not physical instances, but rather a billing discount applied to the use of certain on-demand DB instances in your account. Discounts for reserved DB instances are tied to instance type and Amazon Web Services Region.

The general process for working with reserved DB instances is: First get information about available reserved DB instance offerings, then purchase a reserved DB instance offering, and finally get information about your existing reserved DB instances.

For information about purchasing reserved DB instances and viewing the billing for reserved DB instances, see the following sections.

- Purchasing reserved DB instances for Amazon Aurora
- Viewing the billing for reserved DB instances for Amazon Aurora

Overview of reserved DB instances

When you purchase a reserved DB instance in Amazon RDS, you purchase a commitment to getting a discounted rate, on a specific DB instance type, for the duration of the reserved DB instance. To use an Amazon RDS reserved DB instance, you create a new DB instance just like you do for an on-demand instance.

The new DB instance that you create must have the same specifications as the reserved DB instance for the following:

- Amazon Web Services Region
- DB engine (The DB engine's version number doesn't need to match.)
- DB instance type

If the specifications of the new DB instance match an existing reserved DB instance for your account, you are billed at the discounted rate offered for the reserved DB instance. Otherwise, the DB instance is billed at an on-demand rate.

You can modify a DB instance that you're using as a reserved DB instance. If the modification is within the specifications of the reserved DB instance, part or all of the discount still applies to

the modified DB instance. If the modification is outside the specifications, such as changing the instance class, the discount no longer applies. For more information, see Size-flexible reserved DB instances.

Topics

- Offering types
- Aurora DB cluster configuration flexibility
- Size-flexible reserved DB instances
- Aurora reserved DB instance billing examples
- Deleting a reserved DB instance

For more information about reserved DB instances, including pricing, see Amazon RDS reserved instances.

Offering types

Reserved DB instances are available in three varieties—No Upfront, Partial Upfront, and All Upfront—that let you optimize your Amazon RDS costs based on your expected usage.

> **Note**
>
> Not all RDS instance classes support all Reserved Instance offering types. For example, some instance classes might not offer the No Upfront option. To confirm availability, review the Reserved Instance offerings in the Amazon Web Services Management Console or use the `describe-reserved-db-instances-offerings` Amazon CLI command.

No Upfront

This option provides access to a reserved DB instance without requiring an upfront payment. Your No Upfront reserved DB instance bills a discounted hourly rate for every hour within the term, regardless of usage, and no upfront payment is required. This option is only available as a one-year reservation.

Partial Upfront

This option requires a part of the reserved DB instance to be paid upfront. The remaining hours in the term are billed at a discounted hourly rate, regardless of usage. This option is the replacement for the previous Heavy Utilization option.

All Upfront

Full payment is made at the start of the term, with no other costs incurred for the remainder of the term regardless of the number of hours used.

If you are using consolidated billing, all the accounts in the organization are treated as one account. This means that all accounts in the organization can receive the hourly cost benefit of reserved DB instances that are purchased by any other account. For more information about consolidated billing, see Amazon RDS reserved DB instances in the *Amazon Billing and Cost Management User Guide*.

Aurora DB cluster configuration flexibility

You can use Aurora reserved DB instances with both DB cluster configurations:

- Aurora I/O-Optimized – You pay only for the usage and storage of your DB clusters, with no additional charges for read and write I/O operations.
- Aurora Standard – In addition to the usage and storage of your DB clusters, you also pay a standard rate per 1 million requests for I/O operations.

Aurora automatically accounts for the price difference between these configurations. Aurora I/O-Optimized consumes 30% more normalized units per hour than Aurora Standard.

For more information about Aurora cluster storage configurations, see Storage configurations for Amazon Aurora DB clusters. For more information about pricing for Aurora cluster storage configurations, see Amazon Aurora pricing.

Size-flexible reserved DB instances

When you purchase a reserved DB instance, one thing that you specify is the instance class, for example db.r5.large. For more information about DB instance classes, see Amazon AuroraDB instance classes.

If you have a DB instance, and you need to scale it to larger capacity, your reserved DB instance is automatically applied to your scaled DB instance. That is, your reserved DB instances are automatically applied across all DB instance class sizes. Size-flexible reserved DB instances are available for DB instances with the same Amazon Web Services Region and database engine. Size-flexible reserved DB instances can only scale in their instance class type. For example, a reserved

DB instance for a db.r6i.large can apply to a db.r6i.xlarge, but not to a db.r6id.large or db.r7g.large, because db.r6id.large and db.r7g.large are different instance class types.

Size-flexible reserved DB instances are available for the following Aurora database engines:


- Aurora MySQL
- Aurora PostgreSQL

You can compare usage for different reserved DB instance sizes by using normalized units per hour. For example, one unit of usage on two db.r3.large DB instances is equivalent to eight normalized units per hour of usage on one db.r3.small. The following table shows the number of normalized units per hour for each DB instance size.


Instance size	Normalized units per hour for one DB instance, Aurora Standard	Normalized units per hour for one DB instance, Aurora I/O-Optimized	Normalized units per hour for three DB instances (writer and two readers), Aurora Standard	Normalized units per hour for three DB instances (writer and two readers), Aurora I/O-Optimized
small	1	1.3	3	3.9
medium	2	2.6	6	7.8
large	4	5.2	12	15.6
xlarge	8	10.4	24	31.2
2xlarge	16	20.8	48	62.4
4xlarge	32	41.6	96	124.8
8xlarge	64	83.2	192	249.6
12xlarge	96	124.8	288	374.4
16xlarge	128	166.4	384	499.2

Instance size	Normalized units per hour for one DB instance, Aurora Standard	Normalized units per hour for one DB instance, Aurora I/O-Optimized	Normalized units per hour for three DB instances (writer and two readers), Aurora Standard	Normalized units per hour for three DB instances (writer and two readers), Aurora I/O-Optimized
24xlarge	192	249.6	576	748.8
32xlarge	256	332.8	768	998.4

For example, suppose that you purchase a `db.t2.medium` reserved DB instance, and you have two running `db.t2.small` DB instances in your account in the same Amazon Web Services Region. In this case, the billing benefit is applied in full to both instances.

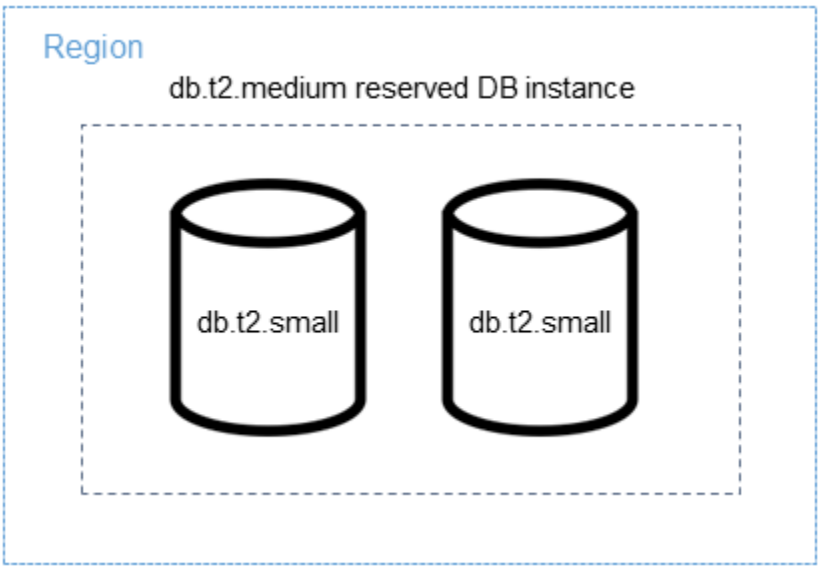

Alternatively, if you have one `db.t2.large` instance running in your account in the same Amazon Web Services Region, the billing benefit is applied to 50 percent of the usage of the DB instance.

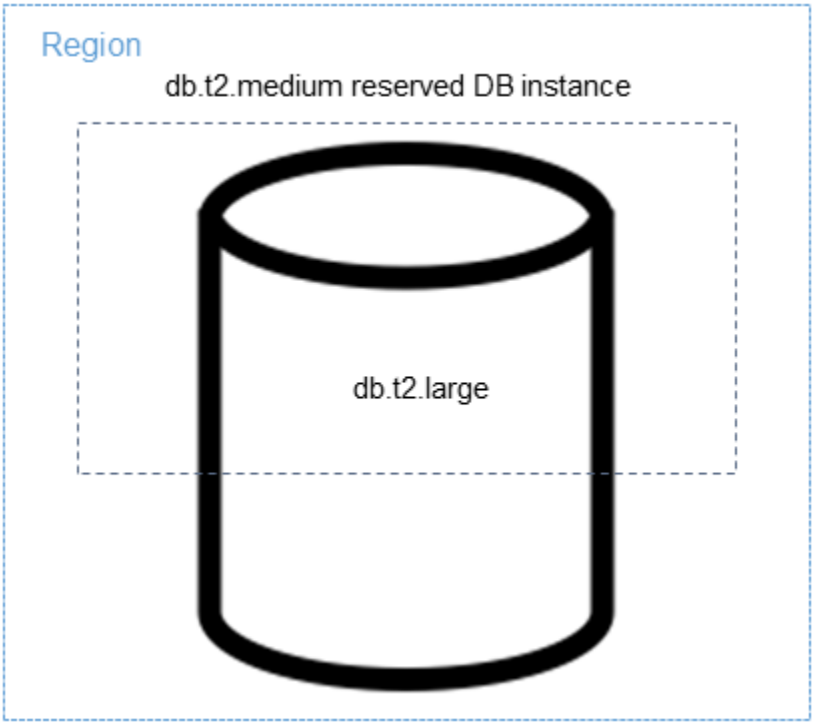

> **Note**
>
> We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see DB instance class types.

Aurora reserved DB instance billing examples

The following examples illustrate the pricing for reserved DB instances for Aurora DB clusters using both the Aurora Standard and Aurora I/O-Optimized DB cluster configurations.

Example using Aurora Standard

The price for a reserved DB instance doesn't provide a discount for the costs associated with storage, backups, and I/O. The following example illustrates the total cost per month for a reserved DB instance:

- An Aurora MySQL reserved Single-AZ db.r5.large DB instance class in US East (N. Virginia) at a cost of $0.19 per hour, or $138.70 per month
- Aurora storage at a cost of $0.10 per GiB per month (assume $45.60 per month for this example)

- Aurora I/O at a cost of $0.20 per 1 million requests (assume $20 per month for this example)
- Aurora backup storage at $0.021 per GiB per month (assume $30 per month for this example)

Add all of these options ($138.70 + $45.60 + $20 + $30) with the reserved DB instance, and the total cost per month is $234.30.

If you choose to use an on-demand DB instance instead of a reserved DB instance, an Aurora MySQL Single-AZ db.r5.large DB instance class in US East (N. Virginia) costs $0.29 per hour, or $217.50 per month. So, for an on-demand DB instance, add all of these options ($217.50 + $45.60 + $20 + $30), and the total cost per month is $313.10. You save nearly $79 per month by using the reserved DB instance.

Example using an Aurora Standard DB cluster with two reader instances

To use reserved instances for Aurora DB clusters, simply purchase one reserved instance for each DB instance in the cluster.

Extending the first example, you have an Aurora MySQL DB cluster with one writer DB instance and two Aurora Replicas, for a total of three DB instances in the cluster. The two Aurora Replicas incur no extra storage or backups charges. If you purchase three db.r5.large Aurora MySQL reserved DB instances, your cost will be $234.30 (for the writer DB instance) + 2 * ($138.70 + $20 I/O per Aurora Replica), for a total of $551.70 per month.

The corresponding on-demand cost for an Aurora MySQL DB cluster with one writer DB instance and two Aurora Replicas is $313.10 + 2 * ($217.50 + $20 I/O per instance) for a total of $788.10 per month. You save $236.40 per month by using the reserved DB instances.

Example using Aurora I/O-Optimized

You can reuse your existing Aurora Standard reserved DB instances with Aurora I/O-Optimized. To fully use the benefits of your reserved instance discounts with Aurora I/O-Optimized, you can buy 30% additional reserved instances similar to your current reserved instances.

The following table shows examples of how to estimate the additional reserved instances when using Aurora I/O-Optimized. If the required reserved instances are a fraction, you can take advantage of the size flexibility available with reserved instances to get to a whole number. In these examples, "current" refers to the Aurora Standard reserved instances that you have now. Additional reserved instances are the number of Aurora Standard reserved instances that you must buy to maintain your current reserved instance discounts when using Aurora I/O-Optimized.

DB instance class	Current Aurora Standard reserved instances	Reserved instances required for Aurora I/O-Optimized	Additional reserved instances needed	Additional reserved instances needed, using size flexibility
db.r6g.large	10	10 * 1.3 = 13	3 * db.r6g.large	3 * db.r6g.large
db.r6g.4xlarge	20	20 * 1.3 = 26	6 * db.r6g.4xlarge	6 * db.r6g.4xlarge
db.r6g.12xlarge	5	5 * 1.3 = 6.5	1.5 * db.r6g.12xlarge	One each of db.r6g.12xlarge, r6g.4xlarge, and r6g.2xlarge (0.5 * db.r6g.12xlarge = 1 * db.r6g.4xlarge + 1 * db.r6g.2xlarge)
db.r6i.24xlarge	15	15 * 1.3 = 19.5	4.5 * db.r6i.24xlarge	4 * db.r6i.24xlarge + 1 * db.r6i.12xlarge (0.5 * db.r6i.24xlarge = 1 * db.r6i.12xlarge)

Example using an Aurora I/O-Optimized DB cluster with two reader instances

You have an Aurora MySQL DB cluster with one writer DB instance and two Aurora Replicas, for a total of three DB instances in the cluster. They use the Aurora I/O-Optimized DB cluster configuration. To use reserved DB instances for this cluster, you would need to buy four reserved DB instances of the same DB instance class. Three DB instances using Aurora I/O-Optimized consume 3.9 normalized units per hour, compared to 3 normalized units per hour for three DB instances using Aurora Standard. However, you save the monthly I/O costs for each DB instance.

> **Note**
>
> The prices in these examples are sample prices and might not match actual prices. For Aurora pricing information, see Amazon Aurora pricing.

Deleting a reserved DB instance

The terms for a reserved DB instance involve a one-year or three-year commitment. You can't cancel a reserved DB instance. However, you can delete a DB instance that is covered by a reserved DB instance discount. The process for deleting a DB instance that is covered by a reserved DB instance discount is the same as for any other DB instance.

You're billed for the upfront costs regardless of whether you use the resources.

If you delete a DB instance that is covered by a reserved DB instance discount, you can launch another DB instance with compatible specifications. In this case, you continue to get the discounted rate during the reservation term (one or three years).

Purchasing reserved DB instances for Amazon Aurora

You can use the Amazon Web Services Management Console, the Amazon CLI, and the RDS API to work with reserved DB instances.

Console

You can use the Amazon Web Services Management Console to work with reserved DB instances as shown in the following procedures.

To get pricing and information about available reserved DB instance offerings

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Reserved instances**.
3. Choose **Purchase Reserved DB Instance**.
4. For **Product description**, choose the DB engine and licensing type.
5. For **DB instance class**, choose the DB instance class.
6. For **Deployment Option**, choose whether you want a Single-AZ or Multi-AZ DB instance deployment.

> **Note**
>
> Reserved Amazon Aurora *instances* always have the deployment option set to **Single-AZ DB instance**. However, when you create an Aurora DB *cluster*, the default deployment option is **Create an Aurora Replica or Reader in a different AZ** (Multi-AZ). You must purchase a reserved DB instance for each instance that you plan to use, including Aurora Replicas. Therefore, for Multi-AZ deployments on Aurora, you must purchase extra reserved DB instances.

7. For **Term**, choose the length of time to reserve the the DB instance.
8. For **Offering type**, choose the offering type.

   After you select the offering type, you can see the pricing information.

   > **Important**
   >
   > Choose **Cancel** to avoid purchasing the reserved DB instance and incurring any charges.

After you have information about the available reserved DB instance offerings, you can use the information to purchase an offering as shown in the following procedure.

To purchase a reserved DB instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Reserved instances**.
3. > **Important**
   >
   > Before proceeding, verify that you are in the correct Amazon Web Services Region. Reserved DB instances are Region-specific and cannot be transferred between Regions. Check the Region selector in the console to ensure you are purchasing the reserved instance in the intended Region.
4. Choose **Purchase reserved DB instance**.
5. For **Product description**, choose the DB engine and licensing type.

6. For **DB instance class**, choose the DB instance class.
7. For **Multi-AZ deployment**, choose whether you want a Single-AZ or Multi-AZ DB instance deployment.

   > **Note**
   >
   > Reserved Amazon Aurora *instances* always have the deployment option set to **Single-AZ DB instance**. When you create an Amazon Aurora DB *cluster* from your reserved DB instance, the DB cluster is automatically created as Multi-AZ. Make sure to purchase a reserved DB instance for each DB instance that you plan to use, including Aurora Replicas.

8. For **Term**, choose the length of time you want the DB instance reserved.
9. For **Offering type**, choose the offering type.

   After you choose the offering type, you can see the pricing information.
   Purchase reserved DB instance console.
10. (Optional) You can assign your own identifier to the reserved DB instances that you purchase to help you track them. For **Reserved Id**, type an identifier for your reserved DB instance.
11. Choose **Submit**.

    Your reserved DB instance is purchased, then displayed in the **Reserved instances** list.

After you have purchased reserved DB instances, you can get information about your reserved DB instances as shown in the following procedure.

To get information about reserved DB instances for your Amazon account

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the **Navigation** pane, choose **Reserved instances**.

   The reserved DB instances for your account appear. To see detailed information about a particular reserved DB instance, choose that instance in the list. You can then see detailed information about that instance in the detail pane.

Amazon CLI

You can use the Amazon CLI to work with reserved DB instances as shown in the following examples.

Example of getting available reserved DB instance offerings

To get information about available reserved DB instance offerings, call the Amazon CLI command `describe-reserved-db-instances-offerings`.

```
aws rds describe-reserved-db-instances-offerings
```

This call returns output similar to the following:

```
OFFERING  OfferingId                            Class         Multi-AZ  Duration  Fixed
 Price  Usage Price  Description  Offering Type
OFFERING  438012d3-4052-4cc7-b2e3-8d3372e0e706  db.r3.large   y         1y
 1820.00 USD  0.368 USD    mysql        Partial  Upfront
OFFERING  649fd0c8-cf6d-47a0-bfa6-060f8e75e95f  db.r3.small   n         1y
 227.50 USD  0.046 USD    mysql        Partial  Upfront
OFFERING  123456cd-ab1c-47a0-bfa6-12345667232f  db.r3.small   n         1y
 162.00 USD   0.00 USD    mysql        All      Upfront
    Recurring Charges:   Amount  Currency  Frequency
    Recurring Charges:   0.123   USD       Hourly
OFFERING  123456cd-ab1c-37a0-bfa6-12345667232d  db.r3.large   y         1y
 700.00 USD   0.00 USD    mysql        All      Upfront
    Recurring Charges:   Amount  Currency  Frequency
    Recurring Charges:   1.25    USD       Hourly
OFFERING  123456cd-ab1c-17d0-bfa6-12345667234e  db.r3.xlarge  n         1y
 4242.00 USD   2.42 USD    mysql        No       Upfront
```

After you have information about the available reserved DB instance offerings, you can use the information to purchase an offering.

To purchase a reserved DB instance, use the Amazon CLI command `purchase-reserved-db-instances-offering` with the following parameters:

- `--reserved-db-instances-offering-id` – The ID of the offering that you want to purchase. See the preceding example to get the offering ID.
- `--reserved-db-instance-id` – You can assign your own identifier to the reserved DB instances that you purchase to help track them.

Example of purchasing a reserved DB instance

The following example purchases the reserved DB instance offering with ID *649fd0c8-cf6d-47a0-bfa6-060f8e75e95f*, and assigns the identifier of *MyReservation*.

For Linux, macOS, or Unix:

```
aws rds purchase-reserved-db-instances-offering \
    --reserved-db-instances-offering-id 649fd0c8-cf6d-47a0-bfa6-060f8e75e95f \
    --reserved-db-instance-id MyReservation
```

For Windows:

```
aws rds purchase-reserved-db-instances-offering ^
    --reserved-db-instances-offering-id 649fd0c8-cf6d-47a0-bfa6-060f8e75e95f ^
    --reserved-db-instance-id MyReservation
```

The command returns output similar to the following:

```
RESERVATION  ReservationId      Class        Multi-AZ  Start Time
 Duration  Fixed Price  Usage Price  Count  State           Description  Offering Type
RESERVATION  MyReservation      db.r3.small  y         2011-12-19T00:30:23.247Z  1y
    455.00 USD   0.092 USD    1      payment-pending  mysql        Partial  Upfront
```

After you have purchased reserved DB instances, you can get information about your reserved DB instances.

To get information about reserved DB instances for your Amazon account, call the Amazon CLI command `describe-reserved-db-instances`, as shown in the following example.

Example of getting your reserved DB instances

```
aws rds describe-reserved-db-instances
```

The command returns output similar to the following:

```
RESERVATION  ReservationId     Class        Multi-AZ  Start Time
 Duration  Fixed Price  Usage Price  Count  State    Description  Offering Type
RESERVATION  MyReservation     db.r3.small  y         2011-12-09T23:37:44.720Z  1y
   455.00 USD   0.092 USD    1      retired  mysql        Partial  Upfront
```

RDS API

You can use the RDS API to work with reserved DB instances:

- To get information about available reserved DB instance offerings, call the Amazon RDS API operation `DescribeReservedDBInstancesOfferings`.
- After you have information about the available reserved DB instance offerings, you can use the information to purchase an offering. Call the `PurchaseReservedDBInstancesOffering` RDS API operation with the following parameters:
  - `--reserved-db-instances-offering-id` – The ID of the offering that you want to purchase.
  - `--reserved-db-instance-id` – You can assign your own identifier to the reserved DB instances that you purchase to help track them.
- After you have purchased reserved DB instances, you can get information about your reserved DB instances. Call the `DescribeReservedDBInstances` RDS API operation.

Viewing the billing for reserved DB instances for Amazon Aurora

You can view the billing for your reserved DB instances in the Billing Dashboard in the Amazon Web Services Management Console.

To view reserved DB instance billing

1. Sign in to the Amazon Web Services Management Console.
2. From the **account menu**, choose **Billing Dashboard**.
3. Choose **Bill Details**.
4. Under **Amazon Service Charges**, expand **Relational Database Service**.
5. Expand the Amazon Web Services Region where your reserved DB instances are, for example **US West (Oregon)**.

   Your reserved DB instances and their hourly charges for the current month are shown under **Amazon Relational Database Service for *`Database Engine`* Reserved Instances**.


   

   The reserved DB instance in this example was purchased All Upfront, so there are no hourly charges.

6. Choose the **Cost Explorer** (bar graph) icon next to the **Reserved Instances** heading.

   The Cost Explorer displays the **Monthly EC2 running hours costs and usage** graph.
7. Clear the **Usage Type Group** filter to the right of the graph.
8. Choose the time period and time unit for which you want to examine usage costs.

   The following example shows usage costs for on-demand and reserved DB instances for the year to date by month.

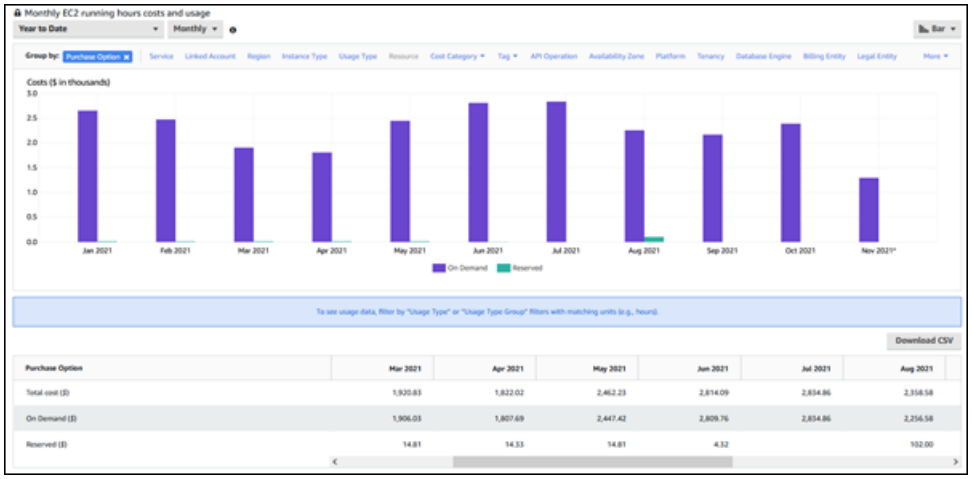

   The reserved DB instance costs from January through June 2021 are monthly charges for a Partial Upfront instance, while the cost in August 2021 is a one-time charge for an All Upfront instance.

   The reserved instance discount for the Partial Upfront instance expired in June 2021, but the DB instance wasn't deleted. After the expiration date, it was simply charged at the on-demand rate.

Amazon Aurora on the Amazon Free Tier

Aurora PostgreSQL is also available on the Amazon Free Tier through the Create with express configuration. In addition to the express configuration limitations, the following restrictions apply when using Aurora PostgreSQL with the Amazon Free Tier:

- Only clusters created with express configuration are supported (full configuration is not available)
- Up to 4 Aurora Capacity Units (ACUs) per cluster
- Up to 1 GB storage per cluster

- Maximum 2 clusters and 2 instances per account
- Aurora Global Database and Zero-ETL integrations are not supported

Setting up your environment for Amazon Aurora

Before you use Amazon Aurora for the first time, complete the following tasks.

Topics

- Sign up for an Amazon Web Services account
- Secure IAM users
- Determine requirements
- Provide access to the DB cluster in the VPC by creating a security group

If you already have an Amazon Web Services account, know your Aurora requirements, and prefer to use the defaults for IAM and VPC security groups, skip ahead to Getting started with Amazon Aurora.

Sign up for an Amazon Web Services account

If you do not have an Amazon Web Services account, use the following procedure to create one.

To sign up for Amazon Web Services

1. Open http://www.amazonaws.cn/ and choose **Sign Up**.
2. Follow the on-screen instructions.

Amazon sends you a confirmation email after the sign-up process is complete. At any time, you can view your current account activity and manage your account by going to http://www.amazonaws.cn/ and choosing **My Account**.

Secure IAM users

After you sign up for an Amazon Web Services account, safeguard your administrative user by turning on multi-factor authentication (MFA). For instructions, see Enable a virtual MFA device for an IAM user (console) in the *IAM User Guide*.

To give other users access to your Amazon Web Services account resources, create IAM users. To secure your IAM users, turn on MFA and only give the IAM users the permissions needed to perform their tasks.

For more information about creating and securing IAM users, see the following topics in the *IAM User Guide*:

- Creating an IAM user in your Amazon Web Services account
- Access management for Amazon resources
- Example IAM identity-based policies

Determine requirements

The basic building block of Aurora is the DB cluster. One or more DB instances can belong to a DB cluster. A DB cluster provides a network address called the *cluster endpoint*. Your applications connect to the cluster endpoint exposed by the DB cluster whenever they need to access the databases created in that DB cluster. The information you specify when you create the DB cluster controls configuration elements such as memory, database engine and version, network configuration, security, and maintenance periods.

Before you create a DB cluster and a security group, you must know your DB cluster and network needs. Here are some important things to consider:

- **Resource requirements** – What are the memory and processor requirements for your application or service? You will use these settings when you determine what DB instance class you will use when you create your DB cluster. For specifications about DB instance classes, see Amazon AuroraDB instance classes.
- **VPC, subnet, and security group –** Your DB cluster will be in a virtual private cloud (VPC). Security group rules must be configured to connect to a DB cluster. The following list describes the rules for each VPC option:
  - **Default VPC** — If your Amazon account has a default VPC in the Amazon Region, that VPC is configured to support DB clusters. If you specify the default VPC when you create the DB cluster:
    - Make sure to create a *VPC security group* that authorizes connections from the application or service to the Aurora DB cluster. Use the **Security Group** option on the VPC console or the Amazon CLI to create VPC security groups. For information, see Step 3: Create a VPC security group.
    - You must specify the default DB subnet group. If this is the first DB cluster you have created in the Amazon Region, Amazon RDS will create the default DB subnet group when it creates the DB cluster.

- **User-defined VPC** — If you want to specify a user-defined VPC when you create a DB cluster:
  - Make sure to create a *VPC security group* that authorizes connections from the application or service to the Aurora DB cluster. Use the **Security Group** option on the VPC console or the Amazon CLI to create VPC security groups. For information, see Step 3: Create a VPC security group.
  - The VPC must meet certain requirements in order to host DB clusters, such as having at least two subnets, each in a separate availability zone. For information, see Amazon VPC and Amazon Aurora.
  - You must specify a DB subnet group that defines which subnets in that VPC can be used by the DB cluster. For information, see the DB Subnet Group section in Working with a DB cluster in a VPC.
- **High availability:** Do you need failover support? On Aurora, a Multi-AZ deployment creates a primary instance and Aurora Replicas. You can configure the primary instance and Aurora Replicas to be in different Availability Zones for failover support. We recommend Multi-AZ deployments for production workloads to maintain high availability. For development and test purposes, you can use a non-Multi-AZ deployment. For more information, see High availability for Amazon Aurora.
- **IAM policies:** Does your Amazon account have policies that grant the permissions needed to perform Amazon RDS operations? If you are connecting to Amazon using IAM credentials, your IAM account must have IAM policies that grant the permissions required to perform Amazon RDS operations. For more information, see Identity and access management for Amazon Aurora.
- **Open ports:** What TCP/IP port will your database be listening on? The firewall at some companies might block connections to the default port for your database engine. If your company firewall blocks the default port, choose another port for the new DB cluster. Note that once you create a DB cluster that listens on a port you specify, you can change the port by modifying the DB cluster.
- **Amazon Region:** What Amazon Region do you want your database in? Having the database close in proximity to the application or web service could reduce network latency. For more information, see Regions and Availability Zones.

Once you have the information you need to create the security group and the DB cluster, continue to the next step.

Provide access to the DB cluster in the VPC by creating a security group

Your DB cluster will be created in a VPC. Security groups provide access to the DB cluster in the VPC. They act as a firewall for the associated DB cluster, controlling both inbound and outbound traffic at the cluster level. DB clusters are created by default with a firewall and a default security group that prevents access to the DB cluster. You must therefore add rules to a security group that enable you to connect to your DB cluster. Use the network and configuration information you determined in the previous step to create rules to allow access to your DB cluster.

For example, if you have an application that will access a database on your DB cluster in a VPC, you must add a custom TCP rule that specifies the port range and IP addresses that application will use to access the database. If you have an application on an Amazon EC2 instance, you can use the VPC security group you set up for the Amazon EC2 instance.

You can configure connectivity between an Amazon EC2 instance a DB cluster when you create the DB cluster. For more information, see Configure automatic network connectivity with an EC2 instance.

> **Tip**
>
> You can set up network connectivity between an Amazon EC2 instance and a DB cluster automatically when you create the DB cluster. For more information, see Configure automatic network connectivity with an EC2 instance.

For information about how to connect resources in Amazon Lightsail to your DB clusters, see Connect Lightsail resources to Amazon Web Services services using VPC peering.

For more information about creating a VPC for use with Aurora, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only). For information about common scenarios for accessing a DB instance, see Scenarios for accessing a DB cluster in a VPC.

To create a VPC security group

1. Sign in to the Amazon Web Services Management Console and open the Amazon VPC console at https://console.amazonaws.cn/vpc.

> **Note**
>
> Make sure you are in the VPC console, not the RDS console.

2. In the Amazon Web Services Management Console, choose the Amazon Region where you want to create your VPC security group and DB cluster. In the list of Amazon VPC resources for that Amazon Region, you should see at least one VPC and several subnets. If you don't, you don't have a default VPC in that Amazon Region.
3. In the navigation pane, choose **Security Groups**.
4. Choose **Create security group**.

   The **Create security group** page appears.
5. In **Basic details**, enter the **Security group name** and **Description**. For **VPC**, choose the VPC that you want to create your DB cluster in.
6. In **Inbound rules**, choose **Add rule**.
   a. For **Type**, choose **Custom TCP**.
   b. For **Port range**, enter the port value to use for your DB cluster.
   c. For **Source**, choose a security group name or type the IP address range (CIDR value) from where you access the DB cluster. If you choose **My IP**, this allows access to the DB cluster from the IP address detected in your browser.
7. If you need to add more IP addresses or different port ranges, choose **Add rule** and enter the information for the rule.
8. (Optional) In **Outbound rules**, add rules for outbound traffic. By default, all outbound traffic is allowed.
9. Choose **Create security group**.

You can use the VPC security group you just created as the security group for your DB cluster when you create it.

> **Note**
>
> If you use a default VPC, a default subnet group spanning all of the VPC's subnets is created for you. When you create a DB cluster, you can select the default VPC and use **default** for **DB Subnet Group**.

Once you have completed the setup requirements, you can create a DB cluster using your requirements and security group by following the instructions in Creating an Amazon Aurora DB cluster. For information about getting started by creating a DB cluster that uses a specific DB engine, see Getting started with Amazon Aurora.

Getting started with Amazon Aurora

In this section, you can find out how to create and connect to an Aurora DB cluster using Amazon RDS.

The following procedures are tutorials that demonstrate the basics of getting started with Aurora. Later sections introduce more advanced Aurora concepts and procedures, such as the different kinds of endpoints and how to scale Aurora clusters up and down.

> **Important**
>
> Before you can create or connect to a DB cluster, make sure to complete the tasks in Setting up your environment for Amazon Aurora.

Topics

- Creating and connecting to an Aurora MySQL DB cluster
- Creating and connecting to an Aurora PostgreSQL DB cluster
- Tutorial: Create a web server and an Amazon Aurora DB cluster

Creating and connecting to an Aurora MySQL DB cluster


This tutorial creates an EC2 instance and an Aurora MySQL DB cluster. The tutorial shows you how to access the DB cluster from the EC2 instance using a standard MySQL client. As a best practice, this tutorial creates a private DB cluster in a virtual private cloud (VPC). In most cases, other resources in the same VPC, such as EC2 instances, can access the DB cluster, but resources outside of the VPC can't access it.

After you complete the tutorial, there is a public and private subnet in each Availability Zone in your VPC. In one Availability Zone, the EC2 instance is in the public subnet, and the DB instance is in the private subnet.

Important

There's no charge for creating an Amazon account. However, by completing this tutorial, you might incur costs for the Amazon resources that you use. You can delete these resources after you complete the tutorial if they are no longer needed.

The following diagram shows the configuration when the tutorial is complete.

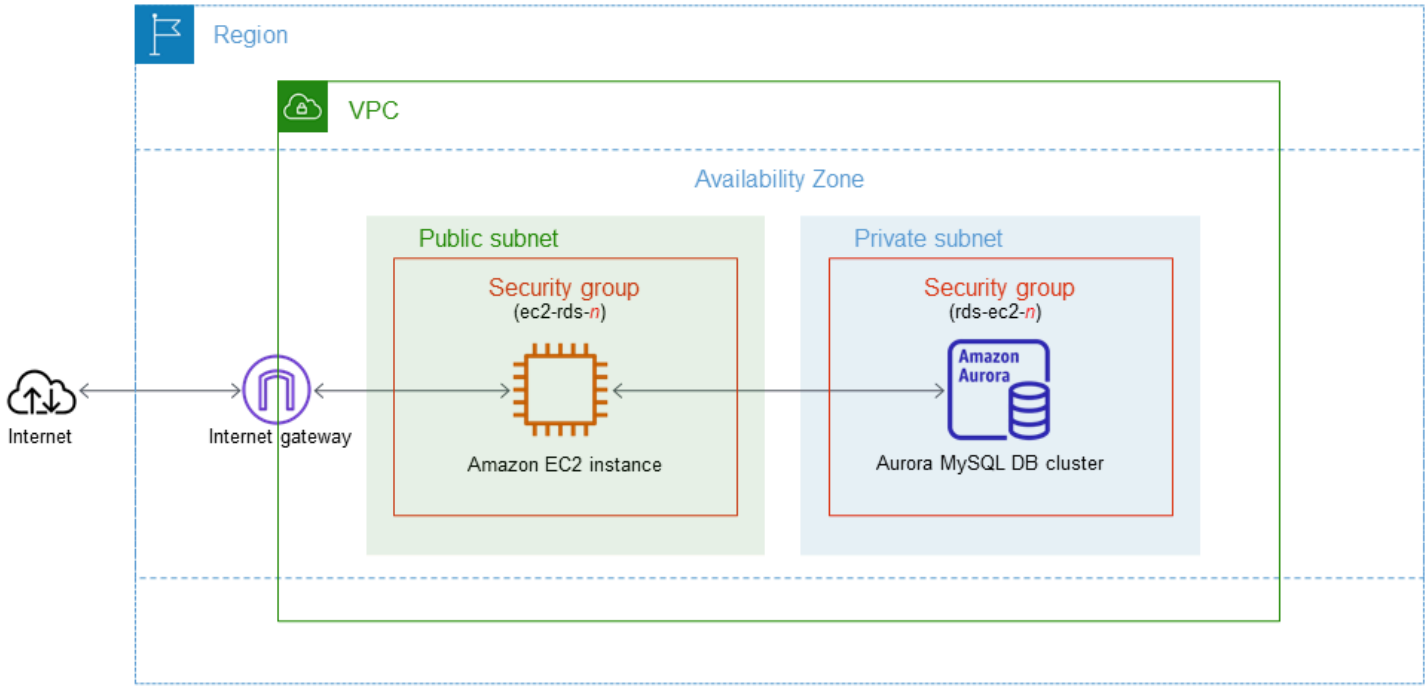

This tutorial allows you to create your resources by using one of the following methods:

1. Use the Amazon Web Services Management Console - Step 1: Create an EC2 instance and Step 2: Create an Aurora MySQL DB cluster
2. Use Amazon CloudFormation to create the database instance and EC2 instance - (Optional) Create VPC, EC2 instance, and Aurora MySQL cluster using Amazon CloudFormation

The first method uses **Easy create** to create a private Aurora MySQL DB cluster with the Amazon Web Services Management Console. Here, you specify only the DB engine type, DB instance size, and DB cluster identifier. **Easy create** uses the default settings for the other configuration options.

When you use **Standard create** instead, you can specify more configuration options when you create a DB cluster. These options include settings for availability, security, backups, and

maintenance. To create a public DB cluster, you must use **Standard create**. For information, see the section called “Creating a DB cluster”.

Topics

- Prerequisites
- Step 1: Create an EC2 instance
- Step 2: Create an Aurora MySQL DB cluster
- (Optional) Create VPC, EC2 instance, and Aurora MySQL cluster using Amazon CloudFormation
- Step 3: Connect to an Aurora MySQL DB cluster
- Step 4: Delete the EC2 instance and DB cluster
- (Optional) Delete the EC2 instance and DB cluster created with CloudFormation
- (Optional) Connect your DB cluster to a Lambda function

Prerequisites

Before you begin, complete the steps in the following sections:


- Sign up for an Amazon Web Services account
- Secure IAM users

Step 1: Create an EC2 instance

Create an Amazon EC2 instance that you will use to connect to your database.

To create an EC2 instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon EC2 console at https://console.amazonaws.cn/ec2/.
2. In the Amazon Web Services Management Console, choose the Amazon Web Services Region in which you want to create the EC2 instance.
3. Choose **EC2 Dashboard**, and then choose **Launch instance**, as shown in the following image.

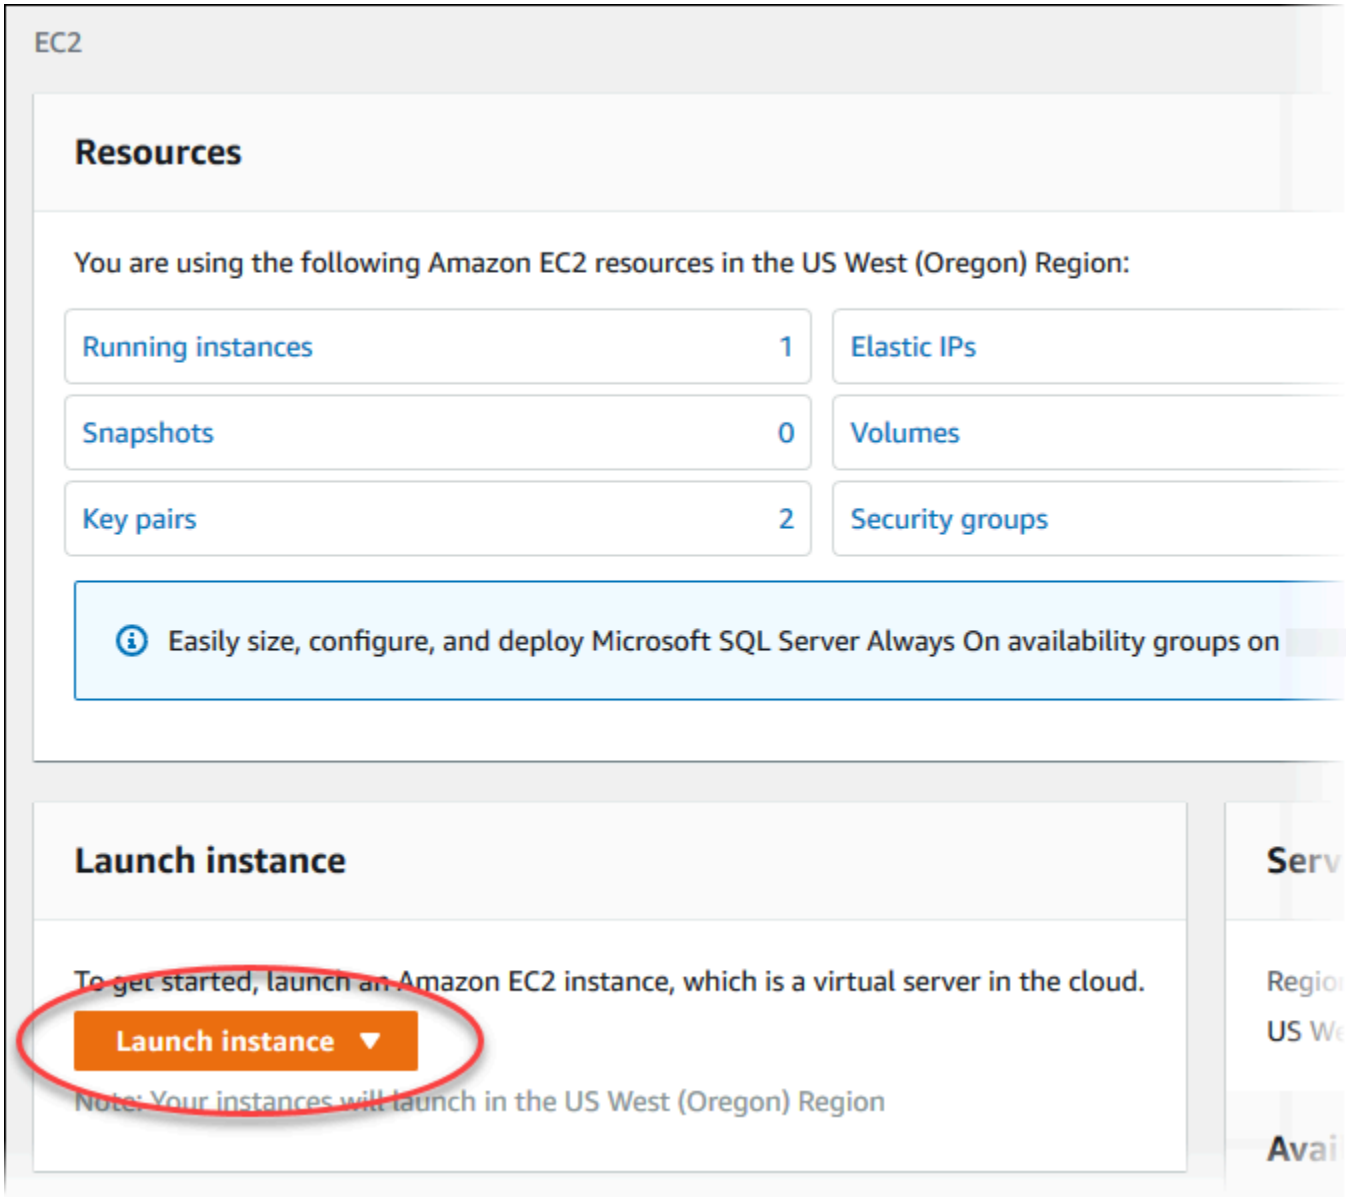


The **Launch an instance** page opens.

4. Choose the following settings on the **Launch an instance** page.

   a. Under **Name and tags**, for **Name**, enter **`ec2-database-connect`**.

   b. Under **Application and OS Images (Amazon Machine Image)**, choose **Amazon Linux**, and then choose the **Amazon Linux 2023 AMI**. Keep the default selections for the other choices.

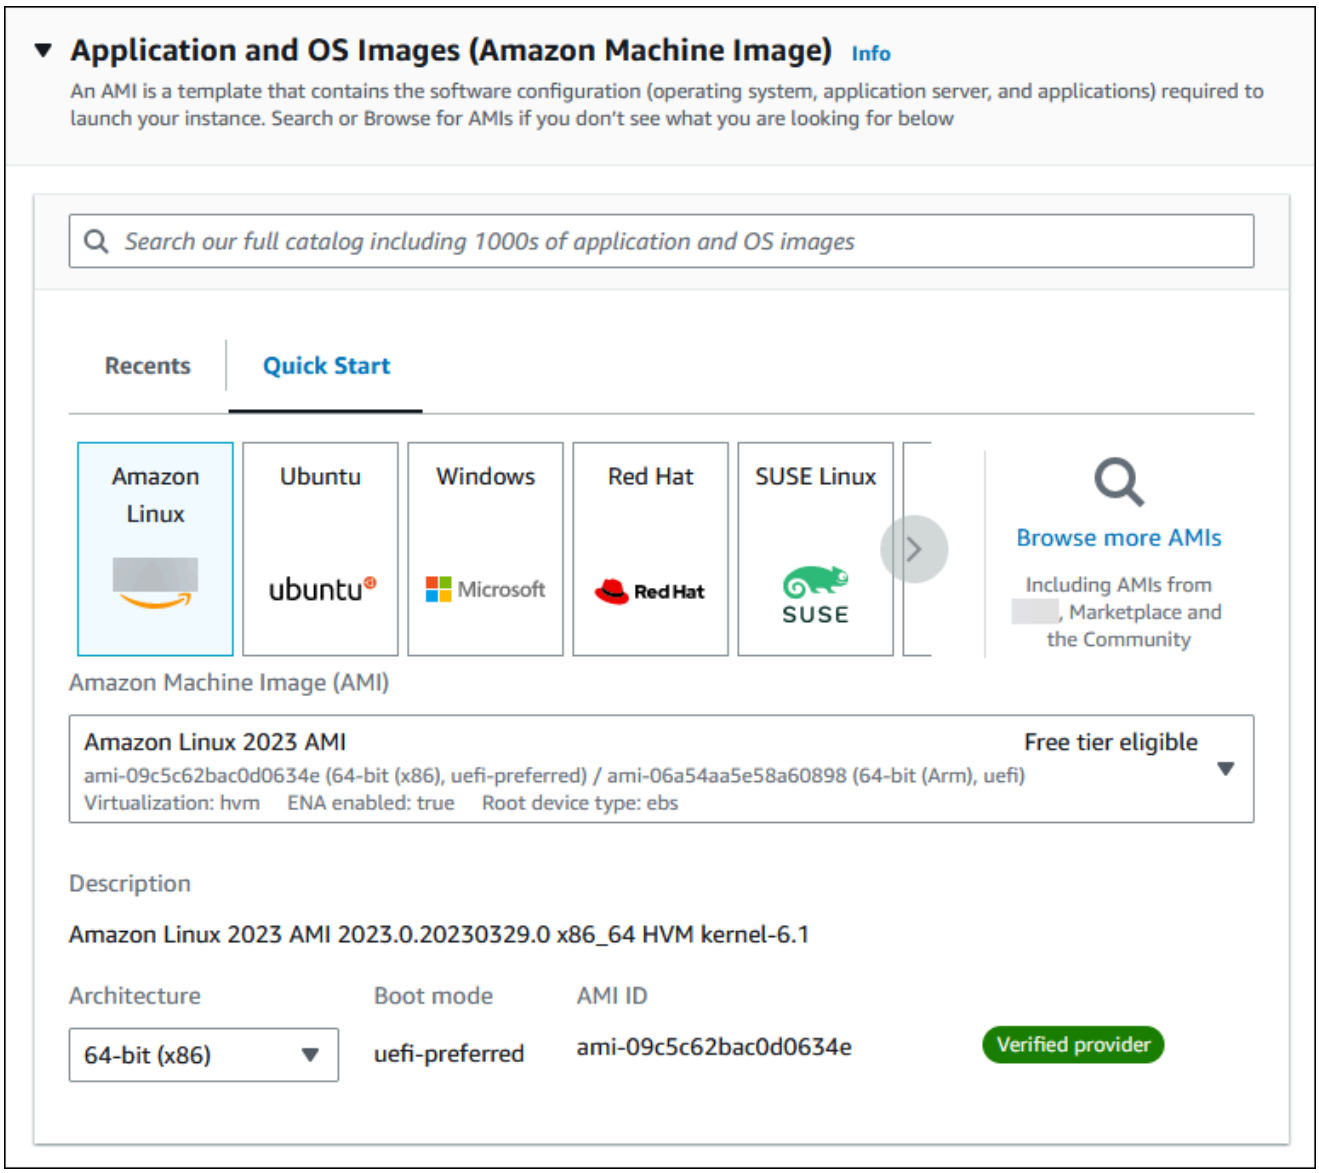

c. Under **Instance type**, choose **t2.micro**.

d. Under **Key pair (login)**, choose a **Key pair name** to use an existing key pair. To create a new key pair for the Amazon EC2 instance, choose **Create new key pair** and then use the **Create key pair** window to create it.

   For more information about creating a new key pair, see Create a key pair in the *Amazon EC2 User Guide*.

e. For **Allow SSH traffic** in **Network settings**, choose the source of SSH connections to the EC2 instance.


   You can choose **My IP** if the displayed IP address is correct for SSH connections. Otherwise, you can determine the IP address to use to connect to EC2 instances in your

VPC using Secure Shell (SSH). To determine your public IP address, in a different browser window or tab, you can use the service at https://checkip.amazonaws.com. An example of an IP address is 192.0.2.1/32.

In many cases, you might connect through an internet service provider (ISP) or from behind your firewall without a static IP address. If so, make sure to determine the range of IP addresses used by client computers.

> **Warning**
>
> If you use `0.0.0.0/0` for SSH access, you make it possible for all IP addresses to access your public EC2 instances using SSH. This approach is acceptable for a short time in a test environment, but it's unsafe for production environments. In production, authorize only a specific IP address or range of addresses to access your EC2 instances using SSH.


The following image shows an example of the **Network settings** section.

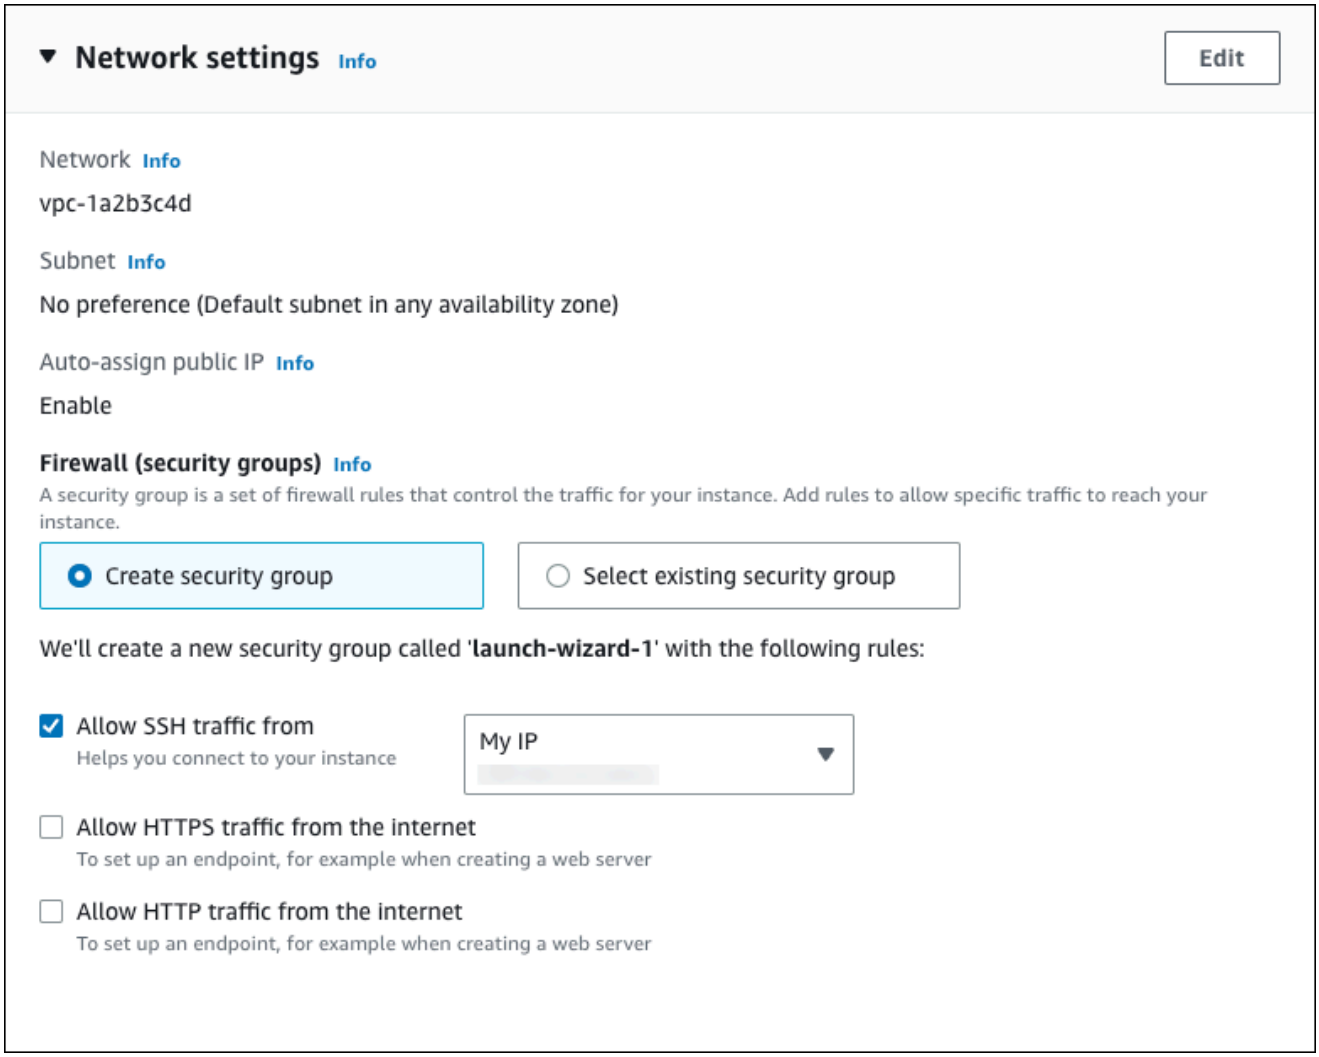


f. Leave the default values for the remaining sections.

g. Review a summary of your EC2 instance configuration in the **Summary** panel, and when you're ready, choose **Launch instance**.


5. On the **Launch Status** page, note the identifier for your new EC2 instance, for example: `i-1234567890abcdef0`.

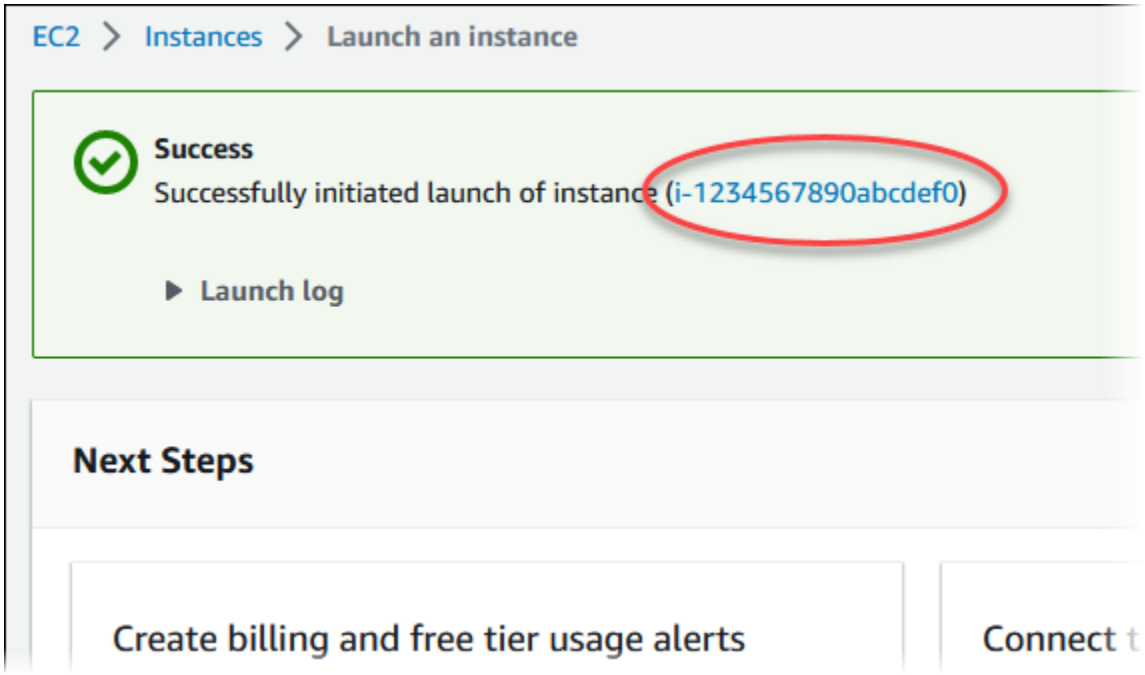

6. Choose the EC2 instance identifier to open the list of EC2 instances, and then select your EC2 instance.
7. In the **Details** tab, note the following values, which you need when you connect using SSH:
   a. In **Instance summary**, note the value for **Public IPv4 DNS**.

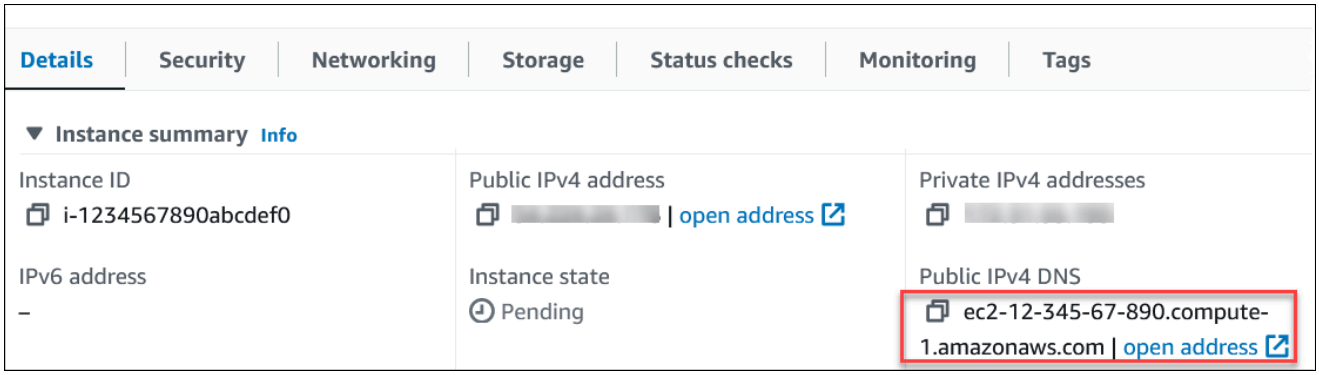

   b. In **Instance details**, note the value for **Key pair name**.

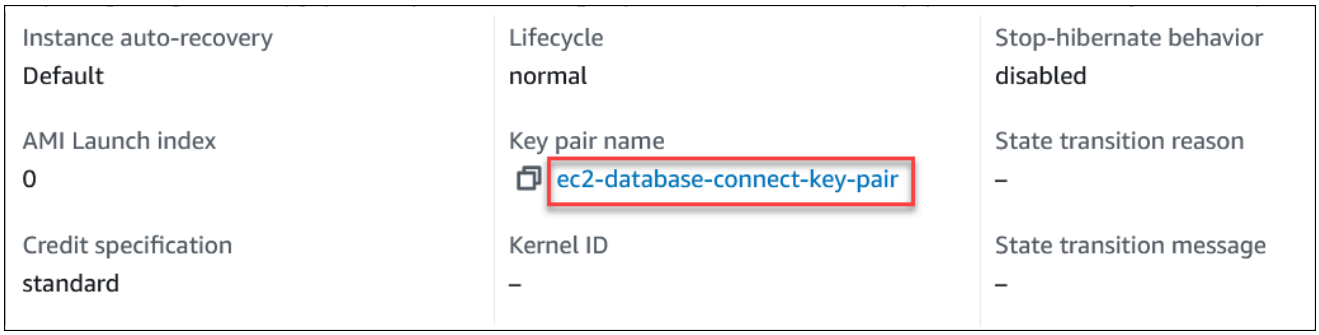


8. Wait until the **Instance state** for your EC2 instance has a status of **Running** before continuing.

Step 2: Create an Aurora MySQL DB cluster

In this example, you use **Easy create** to create an Aurora MySQL DB cluster with a db.r6g.large DB instance class.


To create an Aurora MySQL DB cluster with Easy create

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the Amazon RDS console, choose the Amazon Web Services Region in which you want to create the DB cluster.
3. In the navigation pane, choose **Databases**.
4. Choose **Create database** and make sure that **Easy create** is chosen.

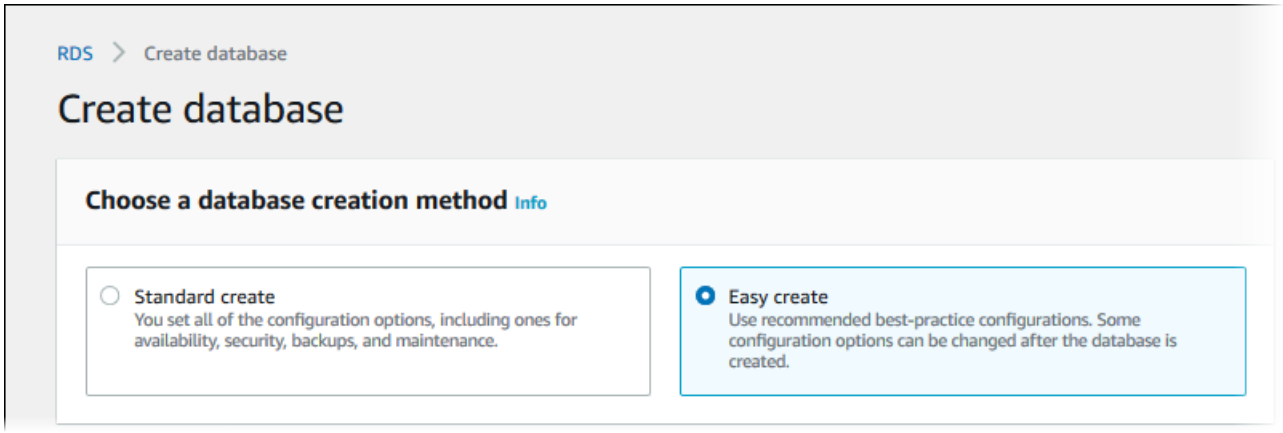

5. In **Configuration**, choose **Aurora (MySQL Compatible)** for **Engine type**.
6. For **DB instance size**, choose **Dev/Test**.
7. For **DB cluster identifier**, enter **`database-test1`**.

   The **Create database** page should look similar to the following image.

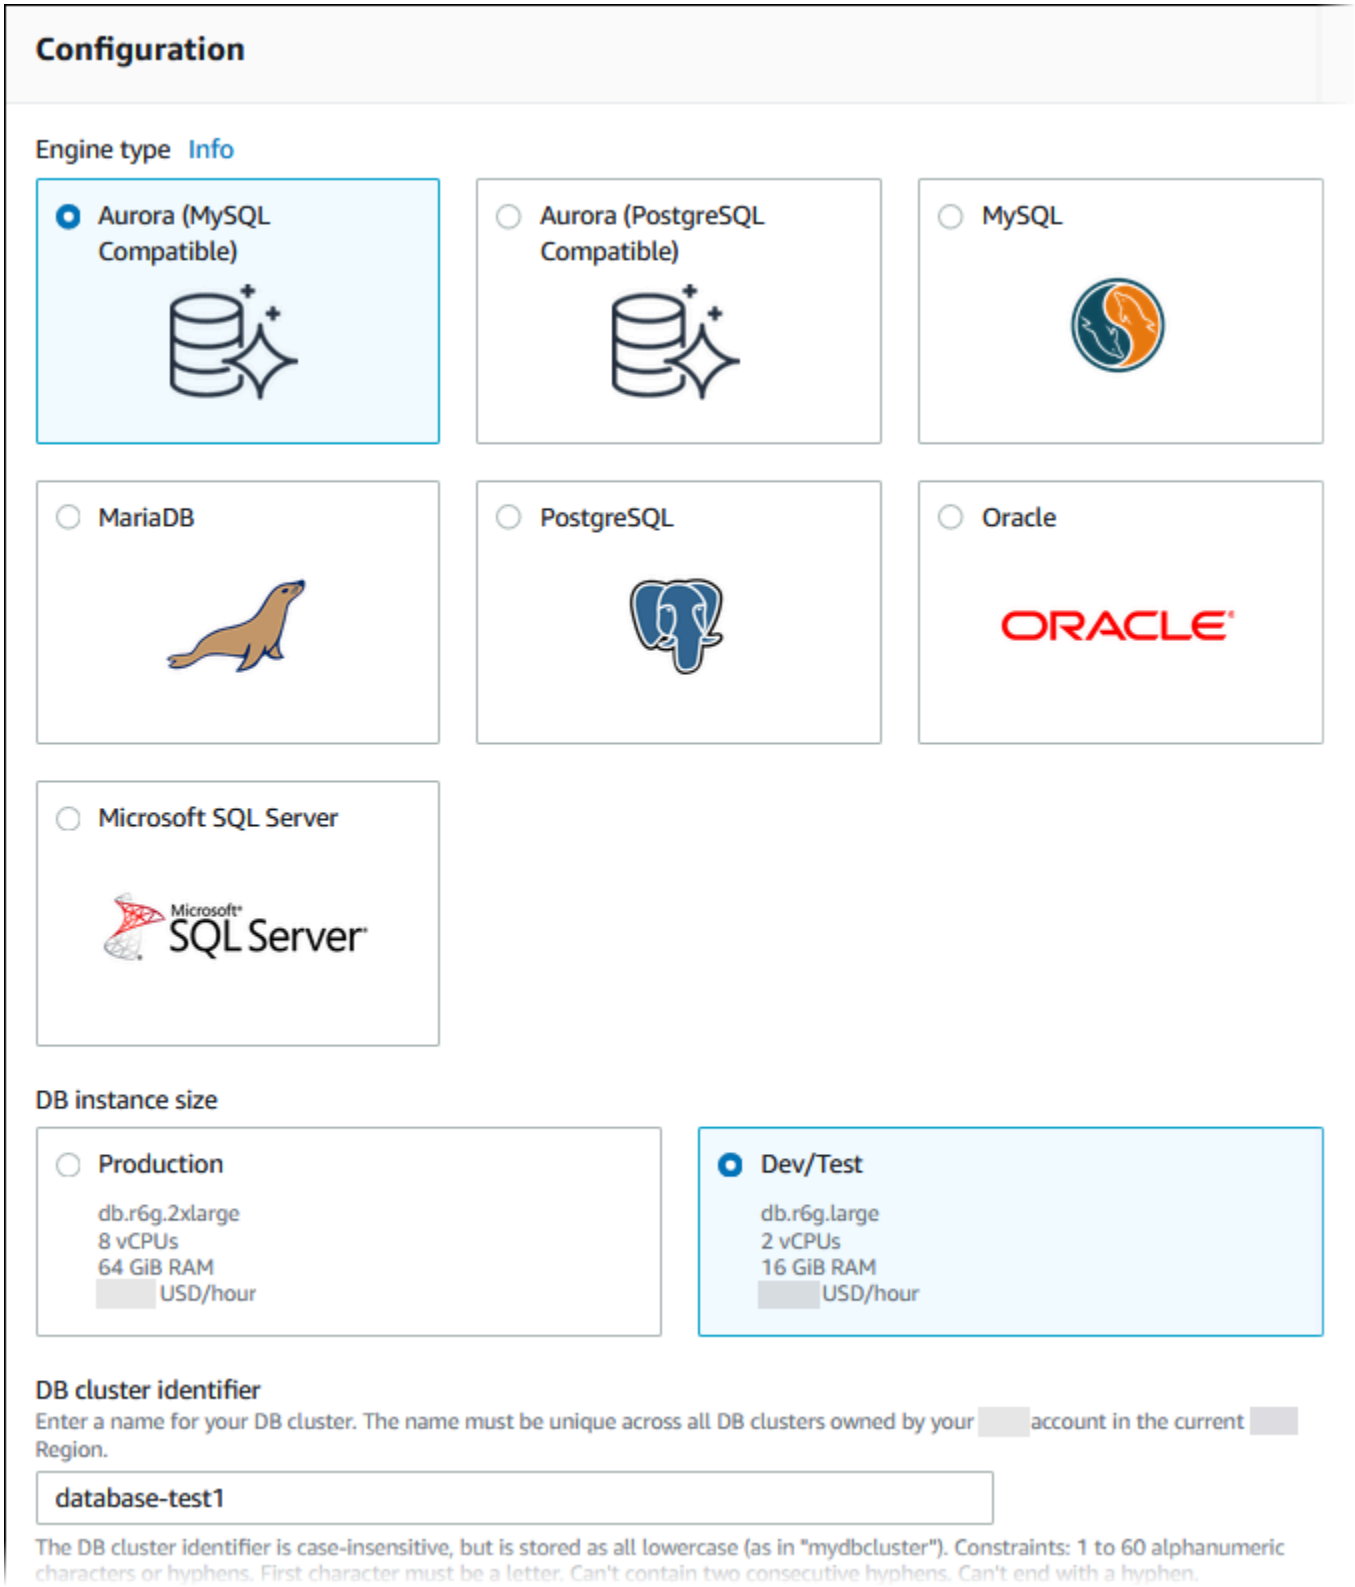


8. For **Master username**, enter a name for the master user, or keep the default name.
9. To use an automatically generated master password for the DB cluster, select **Auto generate a password**.


To enter your master password, make sure that **Auto generate a password** is cleared, and then enter the same password in **Master password** and **Confirm password**.

10. To set up a connection with the EC2 instance you created previously, open **Set up EC2 connection - *optional***.

    Select **Connect to an EC2 compute resource**. Choose the EC2 instance you created previously.

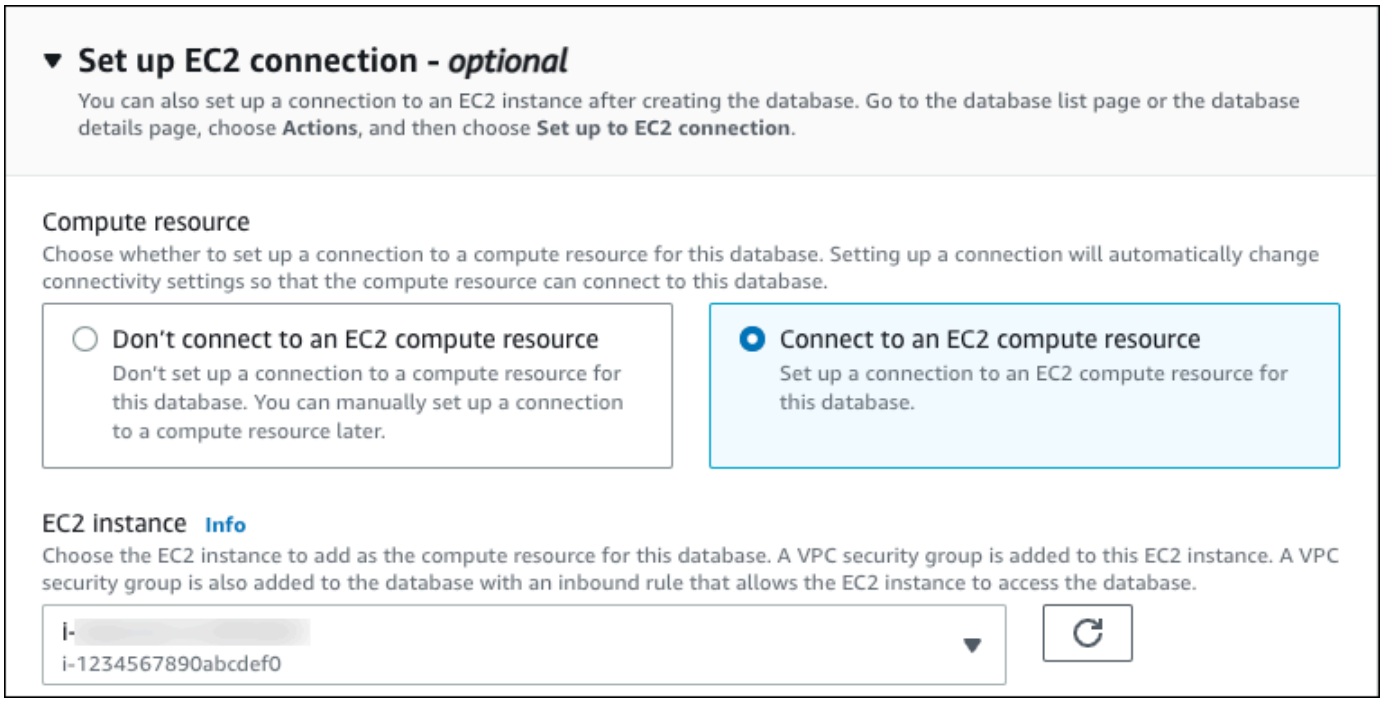

11. Open **View default settings for Easy create**.

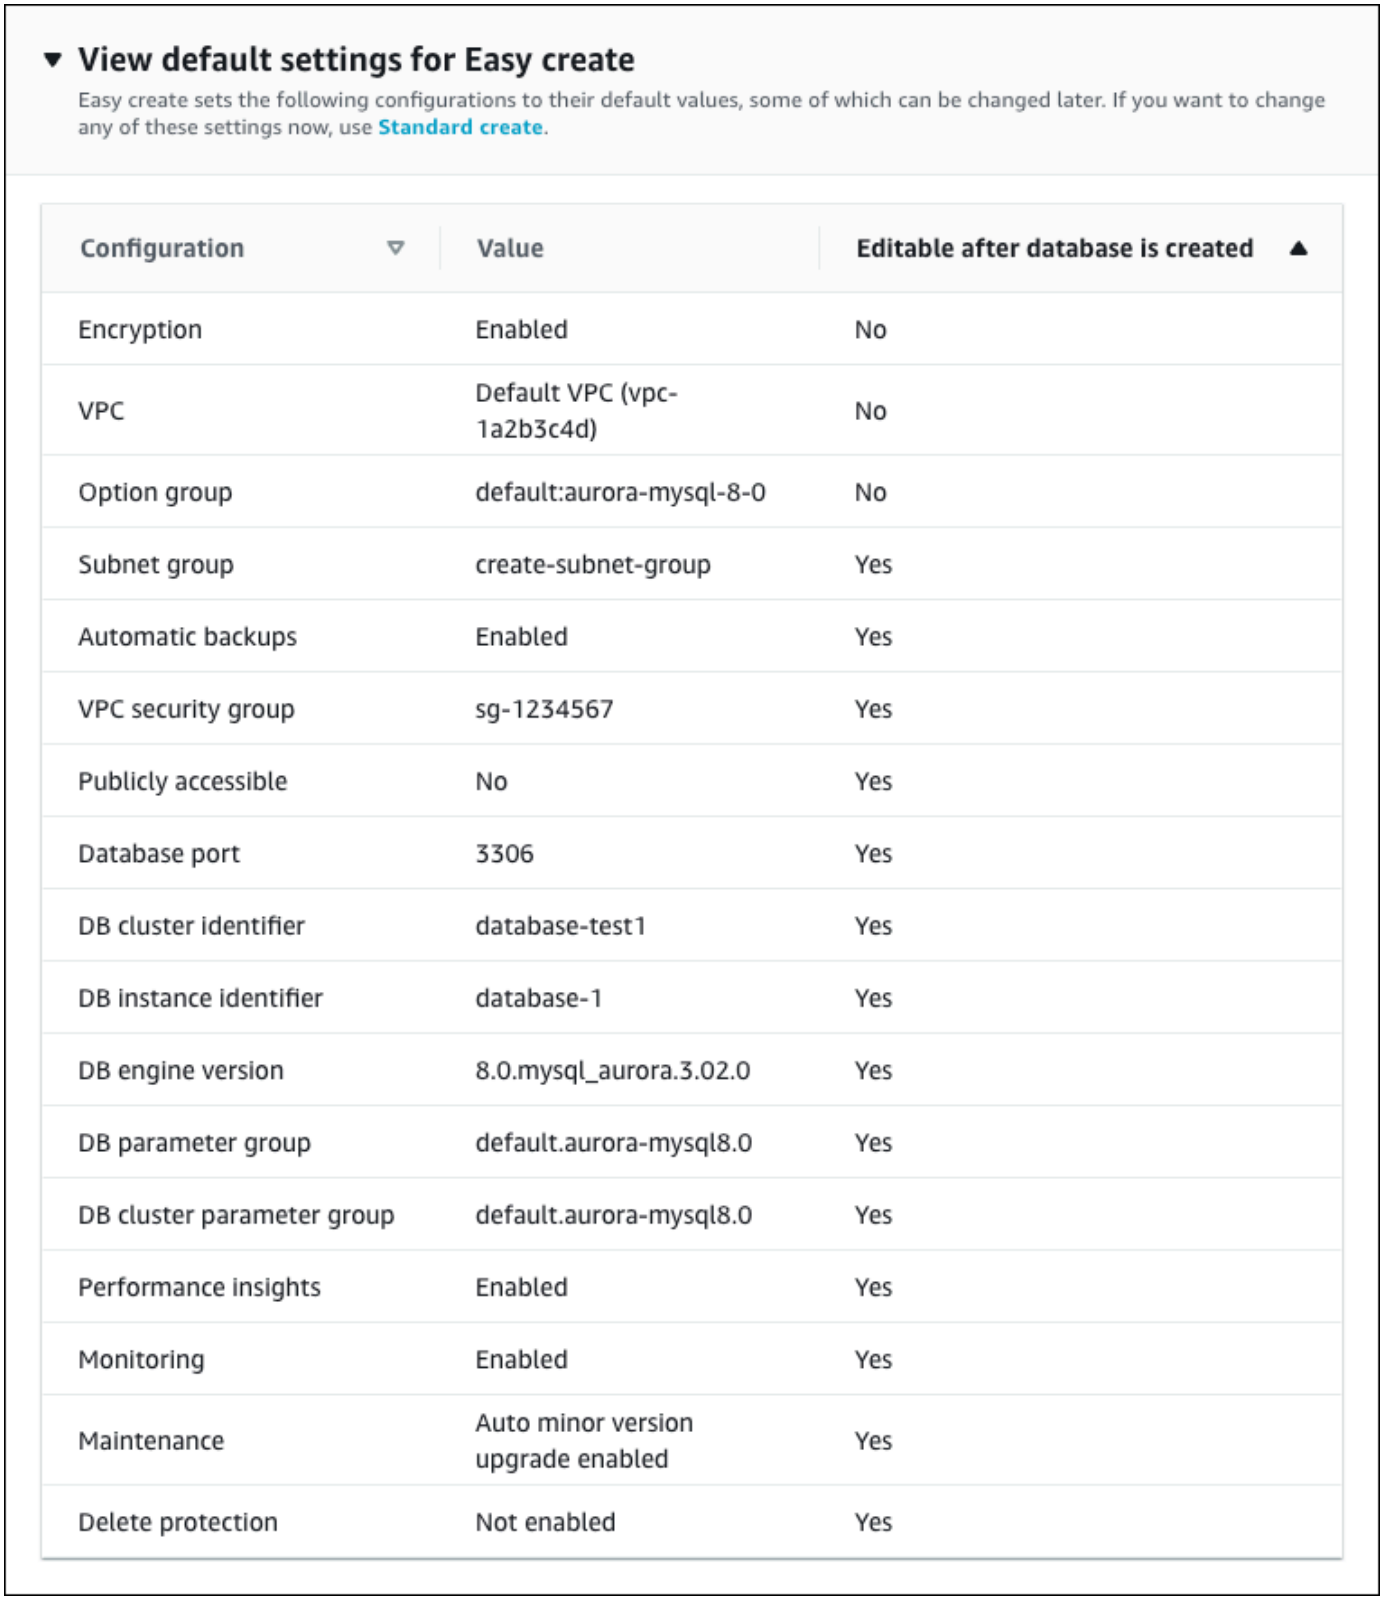

View default settings for Easy create

Easy create sets the following configurations to their default values, some of which can be changed later. If you want to change any of these settings now, use **Standard create**.

Configuration	Value	Editable after database is created
Encryption	Enabled	No
VPC	Default VPC (vpc-1a2b3c4d)	No
Option group	default:aurora-mysql-8-0	No
Subnet group	create-subnet-group	Yes
Automatic backups	Enabled	Yes
VPC security group	sg-1234567	Yes
Publicly accessible	No	Yes
Database port	3306	Yes
DB cluster identifier	database-test1	Yes
DB instance identifier	database-1	Yes
DB engine version	8.0.mysql_aurora.3.02.0	Yes
DB parameter group	default.aurora-mysql8.0	Yes
DB cluster parameter group	default.aurora-mysql8.0	Yes
Performance insights	Enabled	Yes
Monitoring	Enabled	Yes
Maintenance	Auto minor version upgrade enabled	Yes
Delete protection	Not enabled	Yes

You can examine the default settings used with **Easy create**. The **Editable after database is created** column shows which options you can change after you create the database.

- If a setting has **No** in that column, and you want a different setting, you can use **Standard create** to create the DB cluster.
- If a setting has **Yes** in that column, and you want a different setting, you can either use **Standard create** to create the DB cluster, or modify the DB cluster after you create it to change the setting.

12. Choose **Create database**.


    To view the master username and password for the DB cluster, choose **View credential details**.

    You can use the username and password that appears to connect to the DB cluster as the master user.

    > **Important**
    >
    > You can't view the master user password again. If you don't record it, you might have to change it.
    > If you need to change the master user password after the DB cluster is available, you can modify the DB cluster to do so. For more information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

13. In the **Databases** list, choose the name of the new Aurora MySQL DB cluster to show its details.

    The writer instance has a status of **Creating** until the DB cluster is ready to use.

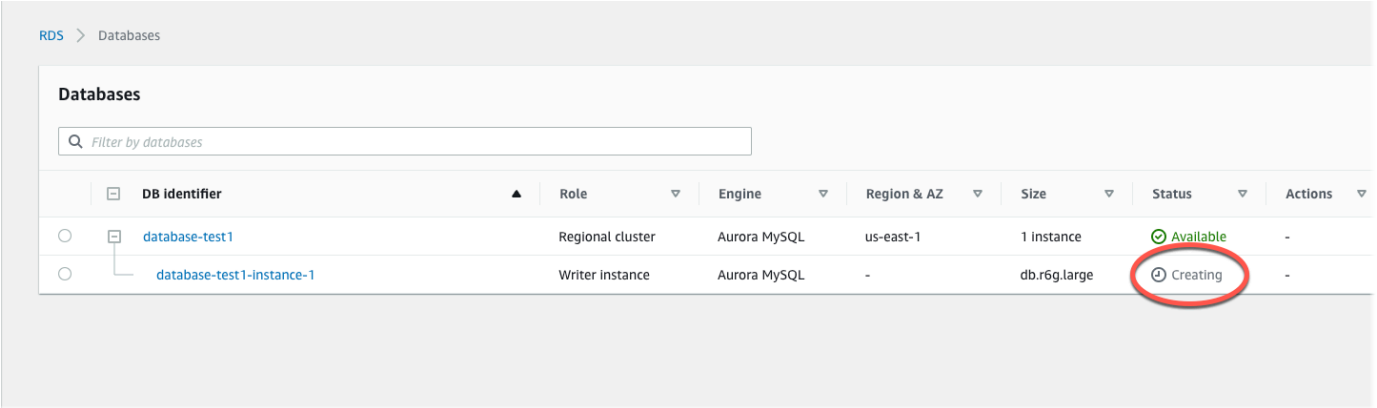

    When the status of the writer instance changes to **Available**, you can connect to the DB cluster. Depending on the DB instance class and the amount of storage, it can take up to 20 minutes before the new DB cluster is available.

(Optional) Create VPC, EC2 instance, and Aurora MySQL cluster using Amazon CloudFormation

Instead of using the console to create your VPC, EC2 instance, and Aurora MySQL DB cluster, you can use Amazon CloudFormation to provision Amazon resources by treating infrastructure as code. To help you organize your Amazon resources into smaller and more manageable units, you can use the Amazon CloudFormation nested stack functionality. For more information, see Creating a stack on the Amazon CloudFormation console and Working with nested stacks.

Important

Amazon CloudFormation is free, but the resources that CloudFormation creates are live. You incur the standard usage fees for these resources until you terminate them. For more information, see Amazon Aurora Pricing.

To create your resources using the Amazon CloudFormation console, complete the following steps:

- Step 1: Download the CloudFormation template
- Step 2: Configure your resources using CloudFormation

Download the CloudFormation template

A CloudFormation template is a JSON or YAML text file that contains the configuration information about the resources you want to create in the stack. This template also creates a VPC and a bastion host for you along with the Aurora cluster.

To download the template file, open the following link, Aurora MySQL CloudFormation template.

In the Github page, choose the *Download raw file* button to save the template YAML file.

Configure your resources using CloudFormation

Note

Before starting this process, make sure you have a Key pair for an EC2 instance in your Amazon Web Services account. For more information, see Amazon EC2 key pairs and Linux instances.

When you use the Amazon CloudFormation template, you must select the correct parameters to make sure your resources are created properly. Follow the steps below:

1. Sign in to the Amazon Web Services Management Console and open the Amazon CloudFormation console at https://console.amazonaws.cn/cloudformation.
2. Choose **Create Stack**.
3. In the Specify template section, select **Upload a template file from your computer**, and then choose **Next**.
4. In the **Specify stack details** page, set the following parameters:
   a. Set **Stack name** to **AurMySQLTestStack**.
   b. Under **Parameters**, set **Availability Zones** by selecting two availability zones.
   c. Under **Linux Bastion Host configuration**, for **Key Name**, select a key pair to login to your EC2 instance.
   d. In **Linux Bastion Host configuration** settings, set the **Permitted IP range** to your IP address. To connect to EC2 instances in your VPC using Secure Shell (SSH), determine your public IP address using the service at https://checkip.amazonaws.com. An example of an IP address is 192.0.2.1/32.

      > **Warning**
      >
      > If you use `0.0.0.0/0` for SSH access, you make it possible for all IP addresses to access your public EC2 instances using SSH. This approach is acceptable for a short time in a test environment, but it's unsafe for production environments. In production, authorize only a specific IP address or range of addresses to access your EC2 instances using SSH.

   e. Under **Database General configuration**, set **Database instance class** to **db.r6g.large**.
   f. Set **Database name** to **`database-test1`**.
   g. For **Database master username**, enter a name for the master user.
   h. Set **Manage DB master user password with Secrets Manager** to `false` for this tutorial.
   i. For **Database password**, set a password of your choice. Remember this password for further steps in the tutorial.
   j. Set **Multi-AZ deployment** to `false`.
   k. Leave all other settings as the default values. Choose **Next** to continue.

5. In the **Configure stack options** page, leave all the default options. Choose **Next** to continue.
6. In the **Review stack** page, select **Submit** after checking the database and Linux bastion host options.


After the stack creation process completes, view the stacks with names *BastionStack* and *AMSNS* to note the information you need to connect to the database. For more information, see Viewing Amazon CloudFormation stack data and resources on the Amazon Web Services Management Console.

Step 3: Connect to an Aurora MySQL DB cluster

You can use any standard SQL client application to connect to the DB cluster. In this example, you connect to the Aurora MySQL DB cluster using the mysql command line client.

To connect to the Aurora MySQL DB cluster

1. Find the endpoint (DNS name) and port number of the writer instance for your DB cluster.
   a. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
   b. In the Amazon RDS console, choose the Amazon Web Services Region for the DB cluster.
   c. In the navigation pane, choose **Databases**.
   d. Choose the Aurora MySQL DB cluster name to display its details.
   e. On the **Connectivity & security** tab, copy the endpoint of the writer instance. Also, note the port number. You need both the endpoint and the port number to connect to the DB cluster.

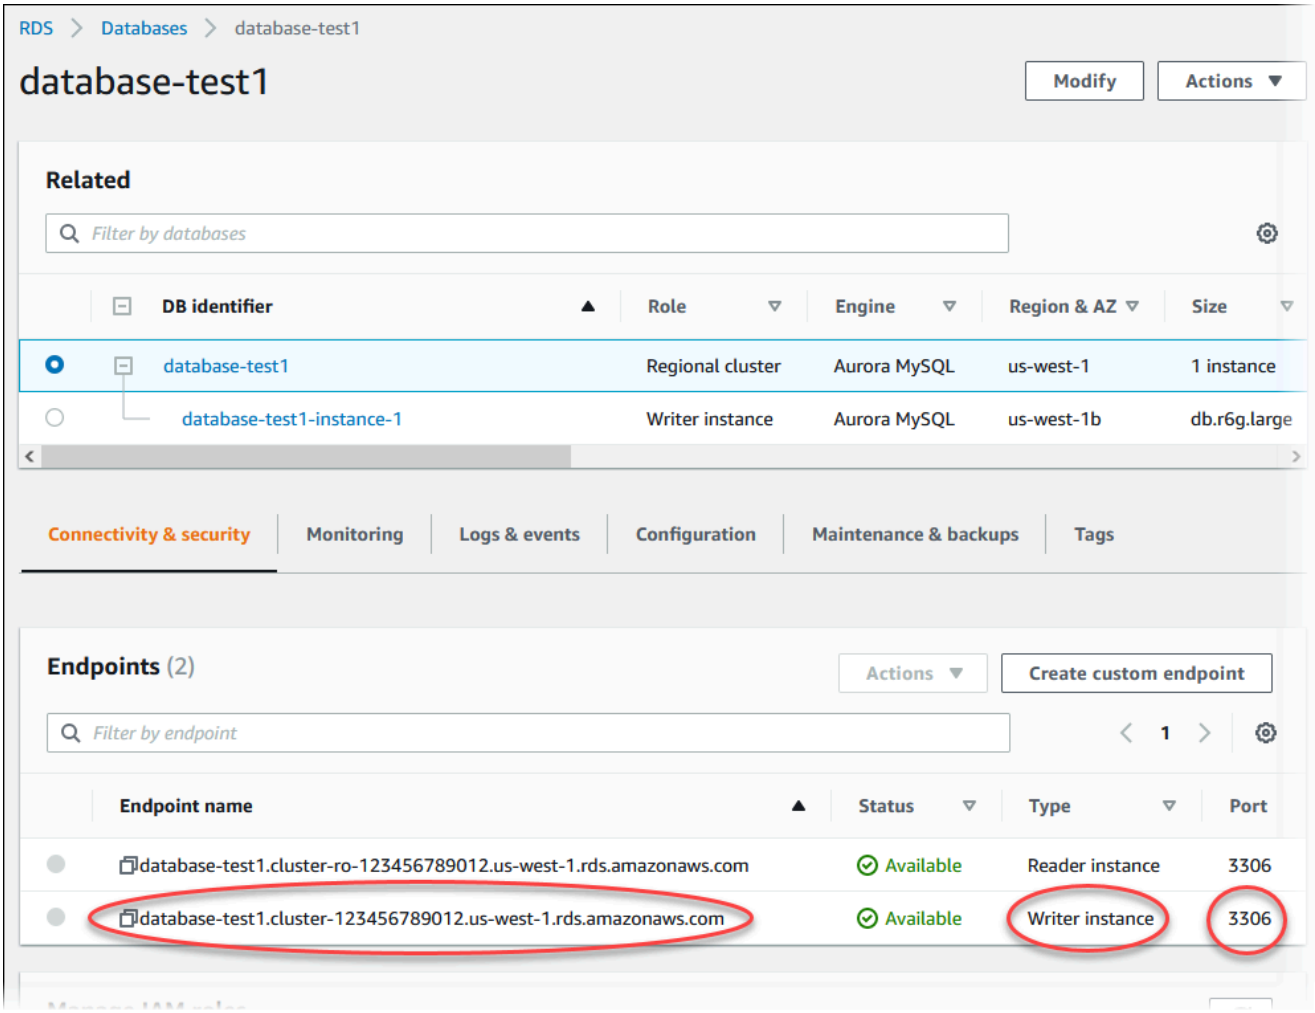

2. Connect to the EC2 instance that you created earlier by following the steps in Connect to your Linux instance in the *Amazon EC2 User Guide*.

   We recommend that you connect to your EC2 instance using SSH. If the SSH client utility is installed on Windows, Linux, or Mac, you can connect to the instance using the following command format:

   ```
   ssh -i location_of_pem_file ec2-user@ec2-instance-public-dns-name
   ```

   For example, suppose that `ec2-database-connect-key-pair.pem` is stored in `/dir1` on Linux, and the public IPv4 DNS for your EC2 instance is `ec2-12-345-678-90.compute-1.amazonaws.com`. Then, your SSH command would look as follows:

```
ssh -i /dir1/ec2-database-connect-key-pair.pem ec2-
user@ec2-12-345-678-90.compute-1.amazonaws.com
```

3. Get the latest bug fixes and security updates by updating the software on your EC2 instance. To do so, use the following command.

> **Note**
>
> The `-y` option installs the updates without asking for confirmation. To examine updates before installing, omit this option.

```
sudo dnf update -y
```

4. To install the mysql command line client from MariaDB on Amazon Linux 2023, run the following command:

```
sudo dnf install mariadb105
```

5. Connect to the Aurora MySQL DB cluster. For example, enter the following command. This action lets you connect to the Aurora MySQL DB cluster using the MySQL client.

   Substitute the endpoint of the writer instance for *`endpoint`*, and substitute the master username that you used for *`admin`*. Provide the master password that you used when prompted for a password.

```
mysql -h endpoint -P 3306 -u admin -p
```

   After you enter the password for the user, you should see output similar to the following.

```
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MySQL connection id is 217
Server version: 8.0.23 Source distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
```

```
MySQL [(none)]>
```

For more information about connecting to an Aurora MySQL DB cluster, see Connecting to an Amazon Aurora MySQL DB cluster. If you can't connect to your DB cluster, see Can't connect to Amazon RDS DB instance.

For security, it is a best practice to use encrypted connections. Only use an unencrypted MySQL connection when the client and server are in the same VPC and the network is trusted. For information about using encrypted connections, see Connecting to Aurora MySQL using SSL.

6. Run SQL commands.

   For example, the following SQL command shows the current date and time:

```
SELECT CURRENT_TIMESTAMP;
```

Step 4: Delete the EC2 instance and DB cluster

After you connect to and explore the sample EC2 instance and DB cluster that you created, delete them so you're no longer charged for them.

If you used Amazon CloudFormation to create resources, skip this step and go to the next step.

To delete the EC2 instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon EC2 console at https://console.amazonaws.cn/ec2/.
2. In the navigation pane, choose **Instances**.
3. Select the EC2 instance, and choose **Instance state, Terminate instance**.
4. Choose **Terminate** when prompted for confirmation.

For more information about deleting an EC2 instance, see Terminate your instance in the *Amazon EC2 User Guide*.

To delete the DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases** and then choose the DB instance associated with the DB cluster.
3. For **Actions**, choose **Delete**.
4. Clear **Create final snapshot?**.
5. Complete the acknowledgement and choose **Delete**.

After all of the DB instances associated with a DB cluster are deleted, the DB cluster is deleted automatically.

(Optional) Delete the EC2 instance and DB cluster created with CloudFormation

If you used Amazon CloudFormation to create resources, delete the CloudFormation stack after you connect to and explore the sample EC2 instance and DB cluster, so you're no longer charged for them.

To delete the CloudFormation resources

1. Open the Amazon CloudFormation console.
2. On the **Stacks** page in the CloudFormation console, select the root stack (the stack without the name VPCStack, BastionStack or AMSNS).
3. Choose **Delete**.
4. Select **Delete stack** when prompted for confirmation.

For more information about deleting a stack in CloudFormation, see Deleting a stack on the Amazon CloudFormation console in the *Amazon CloudFormation User Guide*.

(Optional) Connect your DB cluster to a Lambda function

You can also connect your Aurora MySQL DB cluster to a Lambda serverless compute resource. Lambda functions allow you to run code without provisioning or managing infrastructure. A Lambda function also allows you to automatically respond to code execution requests at any scale,

from a dozen events a day to hundreds of per second. For more information, see Automatically connecting a Lambda function and an Aurora DB cluster.

Creating and connecting to an Aurora PostgreSQL DB cluster

There are two ways of creating an Aurora PostgreSQL cluster: full configuration and express configuration. With express configuration, you can create and query an Aurora Serverless database in seconds. Pre-configured settings accelerate initial setup and reduce time to first query. You have the flexibility to modify certain settings during creation and most other settings afterward. Full configuration provides complete flexibility to choose all settings at create time, but it takes a few minutes before you can run the first query. Please refer to the sections below to understand more about these 2 types of creates.

Topics

- Create with full configuration
- Create with express configuration


Create with full configuration

This tutorial creates an EC2 instance and an Aurora PostgreSQL DB cluster. The tutorial shows you how to access the DB cluster from the EC2 instance using a standard PostgreSQL client. As a best practice, this tutorial creates a private DB cluster in a virtual private cloud (VPC). In most cases, other resources in the same VPC, such as EC2 instances, can access the DB cluster, but resources outside of the VPC can't access it.

After you complete the tutorial, there is a public and private subnet in each Availability Zone in your VPC. In one Availability Zone, the EC2 instance is in the public subnet, and the DB instance is in the private subnet.

> **Important**
>
> There's no charge for creating an Amazon account. However, by completing this tutorial, you might incur costs for the Amazon resources that you use. You can delete these resources after you complete the tutorial if they are no longer needed.

The following diagram shows the configuration when the tutorial is complete.

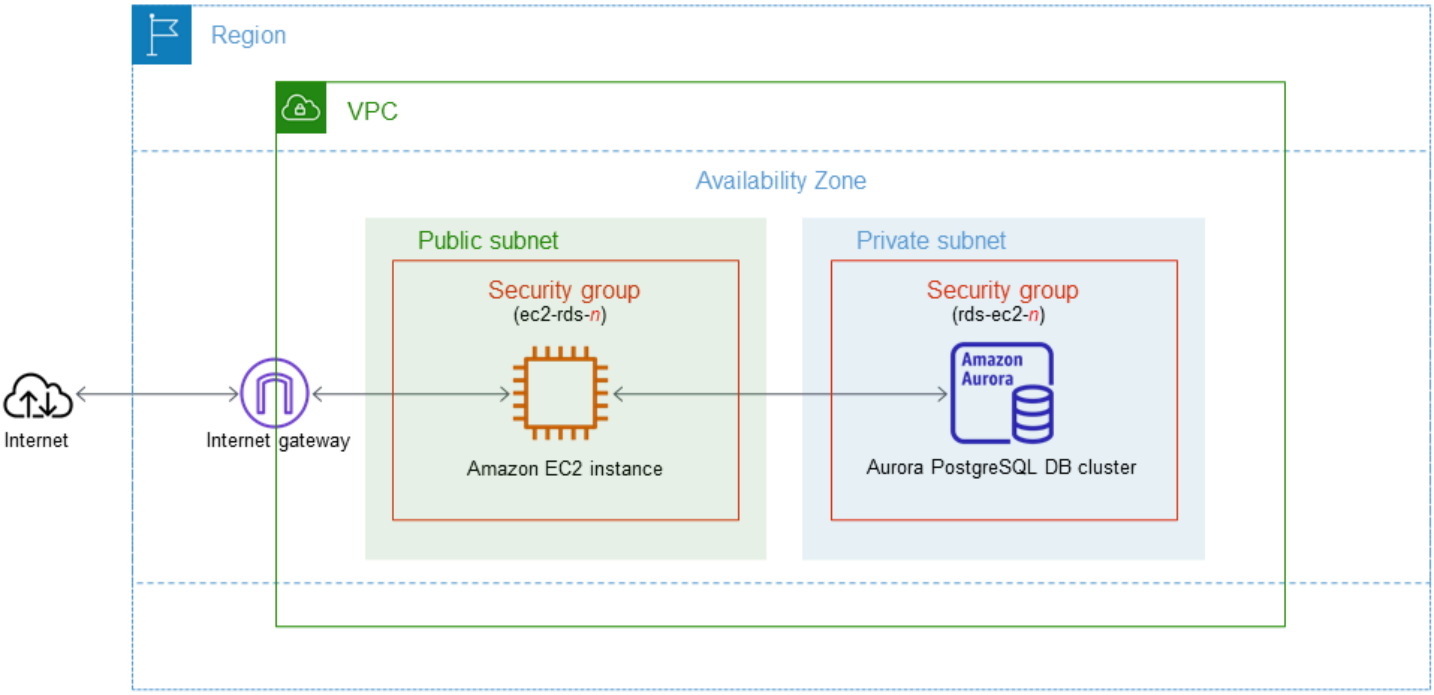

This tutorial allows you to create your resources by using one of the following methods:

1. Use the Amazon Web Services Management Console - Step 1: Create an EC2 instanceand Step 2: Create an Aurora PostgreSQL DB cluster
2. Use Amazon CloudFormation to create the database instance and EC2 instance - (Optional) Create VPC, EC2 instance, and Aurora PostgreSQL cluster using Amazon CloudFormation

The first method uses **Easy create** to create a private Aurora PostgreSQL DB cluster with the Amazon Web Services Management Console. Here, you specify only the DB engine type, DB instance size, and DB cluster identifier. **Easy create** uses the default settings for the other configuration options.

When you use **Standard create** instead, you can specify more configuration options when you create a DB cluster. These options include settings for availability, security, backups, and maintenance. To create a public DB cluster, you must use **Standard create**. For information, see the section called “Creating a DB cluster”.

Topics

- Prerequisites
- Step 1: Create an EC2 instance
- Step 2: Create an Aurora PostgreSQL DB cluster

- (Optional) Create VPC, EC2 instance, and Aurora PostgreSQL cluster using Amazon CloudFormation
- Step 3: Connect to an Aurora PostgreSQL DB cluster
- Step 4: Delete the EC2 instance and DB cluster
- (Optional) Delete the EC2 instance and DB cluster created with CloudFormation
- (Optional) Connect your DB cluster to a Lambda function

Prerequisites

Before you begin, complete the steps in the following sections:


- Sign up for an Amazon Web Services account
- Secure IAM users

Step 1: Create an EC2 instance

Create an Amazon EC2 instance that you will use to connect to your database.

To create an EC2 instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon EC2 console at https://console.amazonaws.cn/ec2/.
2. In the Amazon Web Services Management Console, choose the Amazon Web Services Region in which you want to create the EC2 instance.
3. Choose **EC2 Dashboard**, and then choose **Launch instance**, as shown in the following image.

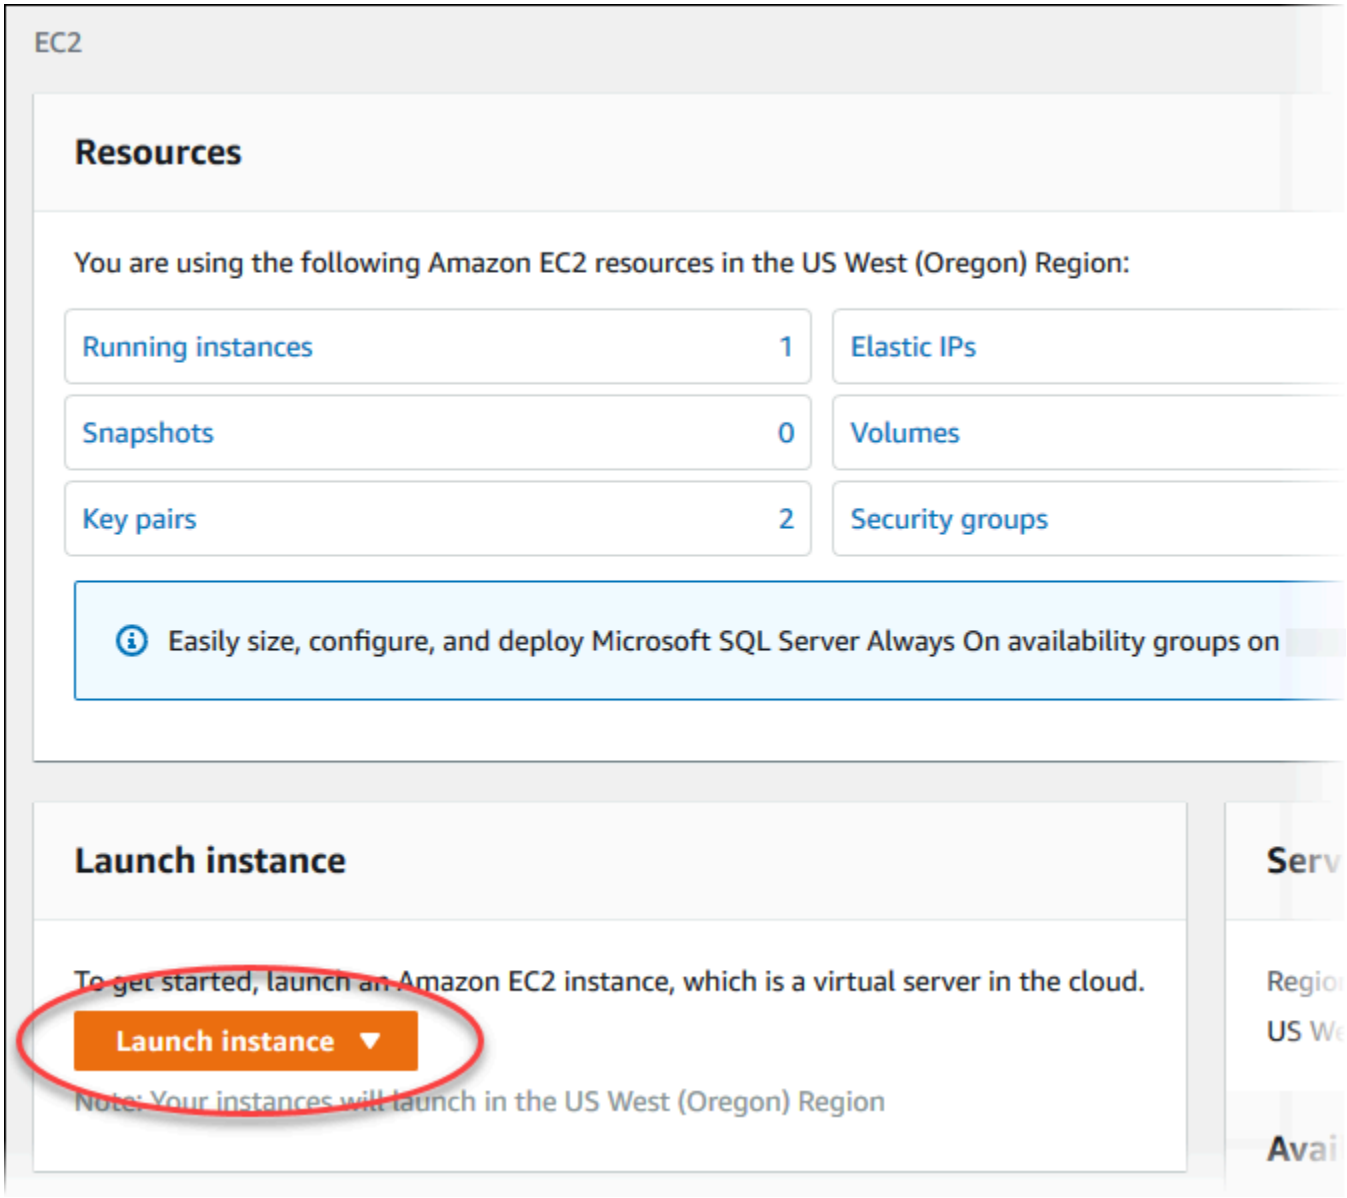


The **Launch an instance** page opens.

4. Choose the following settings on the **Launch an instance** page.

   a. Under **Name and tags**, for **Name**, enter **`ec2-database-connect`**.

   b. Under **Application and OS Images (Amazon Machine Image)**, choose **Amazon Linux**, and then choose the **Amazon Linux 2023 AMI**. Keep the default selections for the other choices.

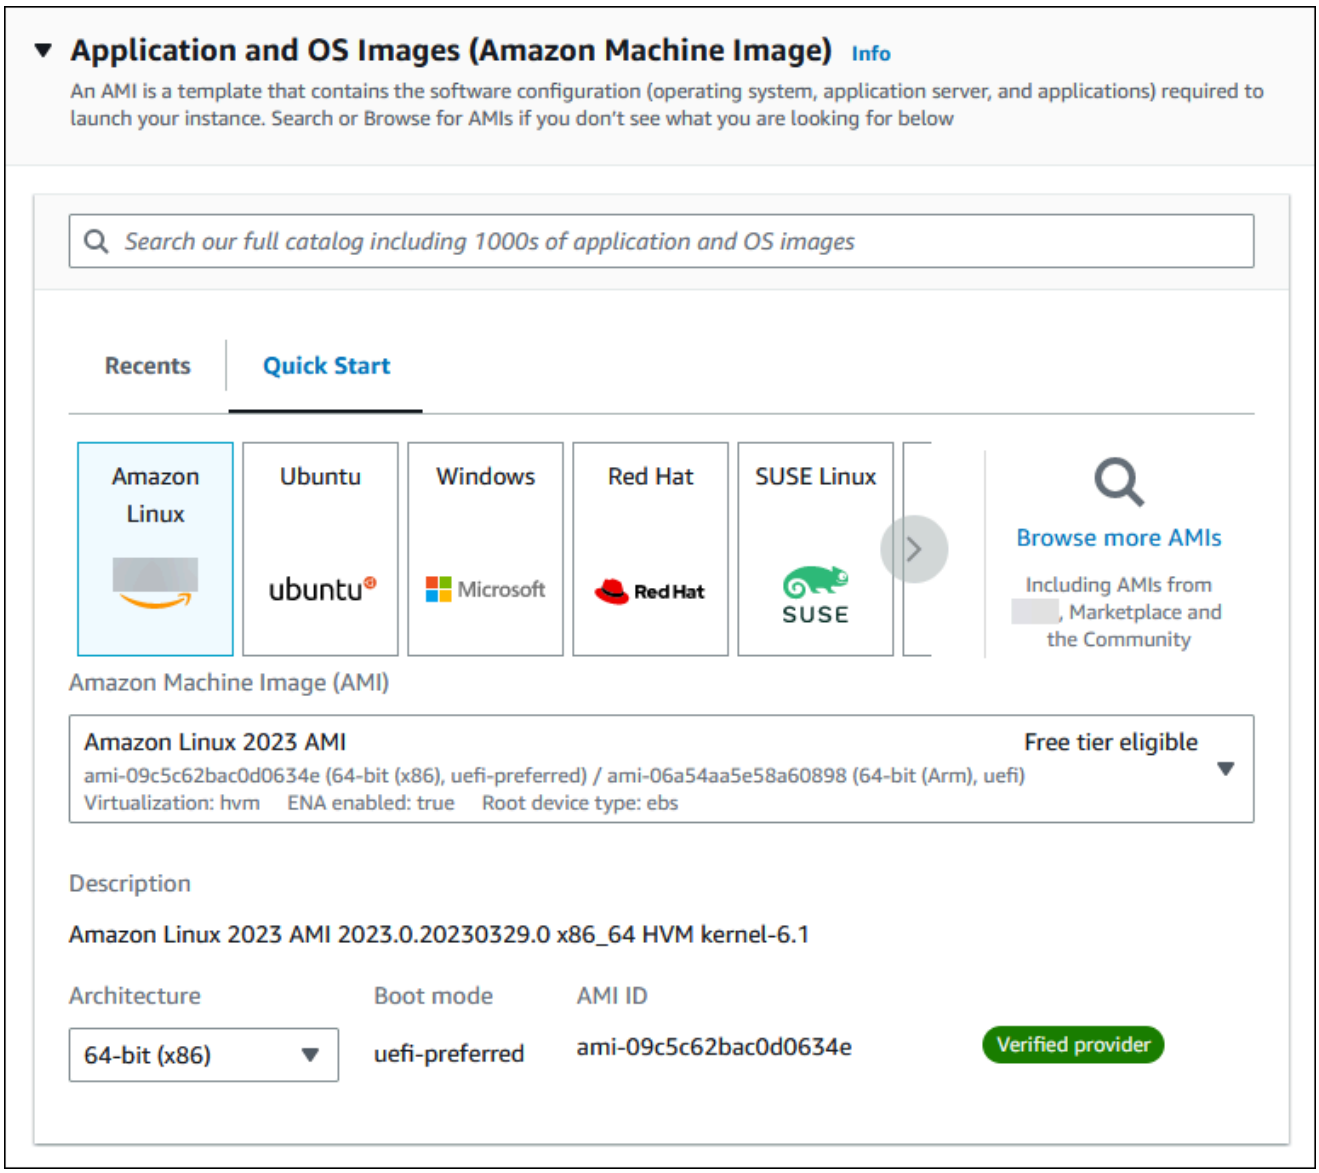

c. Under **Instance type**, choose **t2.micro**.

d. Under **Key pair (login)**, choose a **Key pair name** to use an existing key pair. To create a new key pair for the Amazon EC2 instance, choose **Create new key pair** and then use the **Create key pair** window to create it.

   For more information about creating a new key pair, see Create a key pair in the *Amazon EC2 User Guide*.

e. For **Allow SSH traffic** in **Network settings**, choose the source of SSH connections to the EC2 instance.


   You can choose **My IP** if the displayed IP address is correct for SSH connections. Otherwise, you can determine the IP address to use to connect to EC2 instances in your

VPC using Secure Shell (SSH). To determine your public IP address, in a different browser window or tab, you can use the service at https://checkip.amazonaws.com. An example of an IP address is 192.0.2.1/32.

In many cases, you might connect through an internet service provider (ISP) or from behind your firewall without a static IP address. If so, make sure to determine the range of IP addresses used by client computers.

> **Warning**
>
> If you use `0.0.0.0/0` for SSH access, you make it possible for all IP addresses to access your public EC2 instances using SSH. This approach is acceptable for a short time in a test environment, but it's unsafe for production environments. In production, authorize only a specific IP address or range of addresses to access your EC2 instances using SSH.


The following image shows an example of the **Network settings** section.

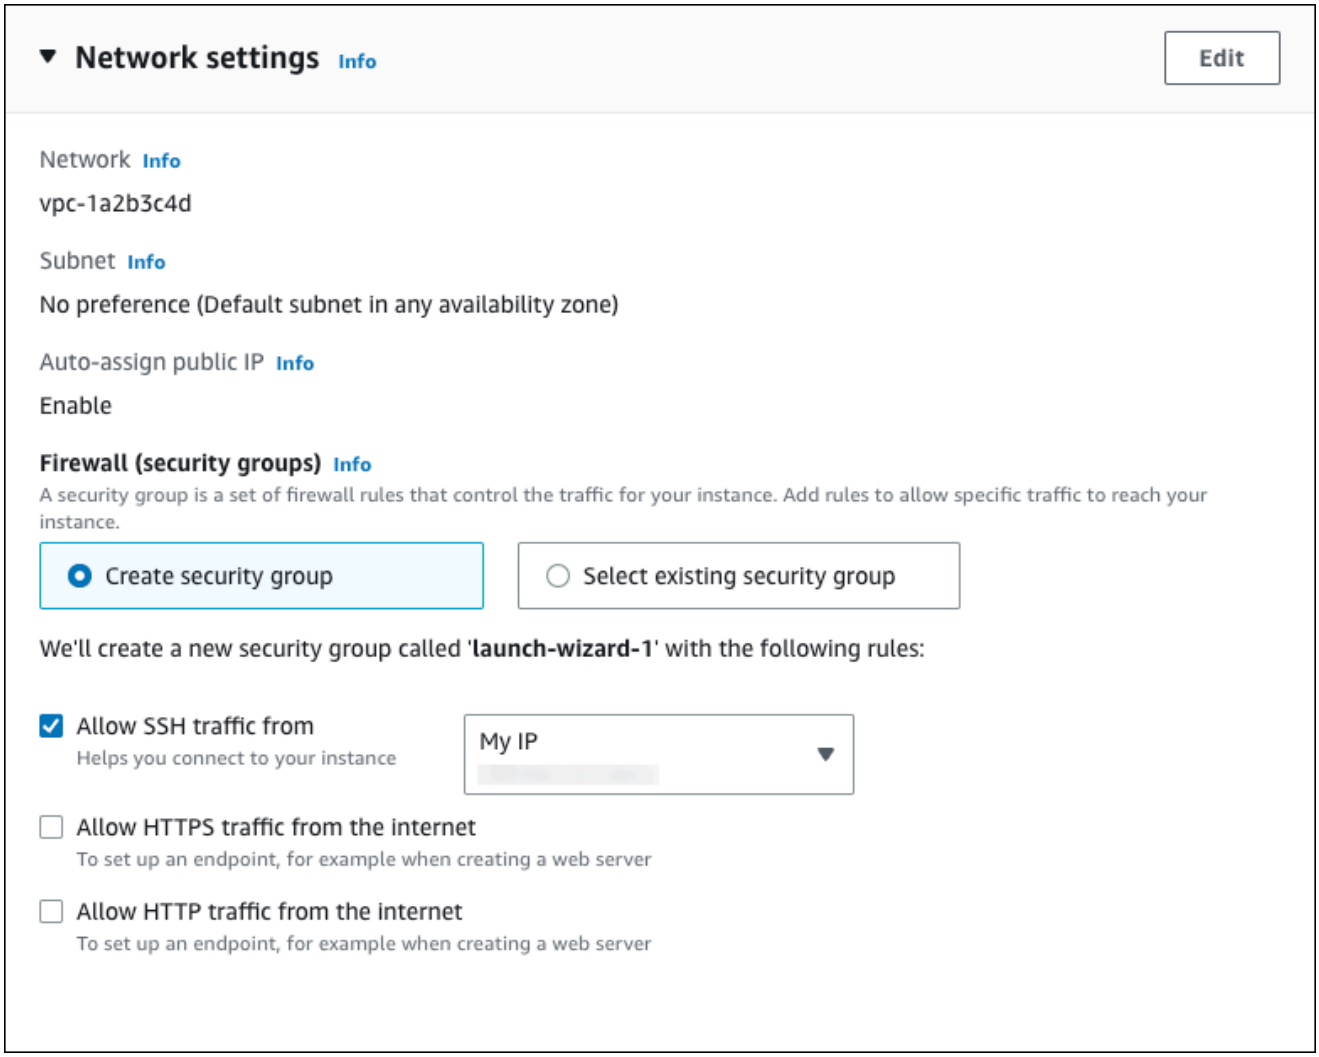


f. Leave the default values for the remaining sections.

g. Review a summary of your EC2 instance configuration in the **Summary** panel, and when you're ready, choose **Launch instance**.


5. On the **Launch Status** page, note the identifier for your new EC2 instance, for example: `i-1234567890abcdef0`.

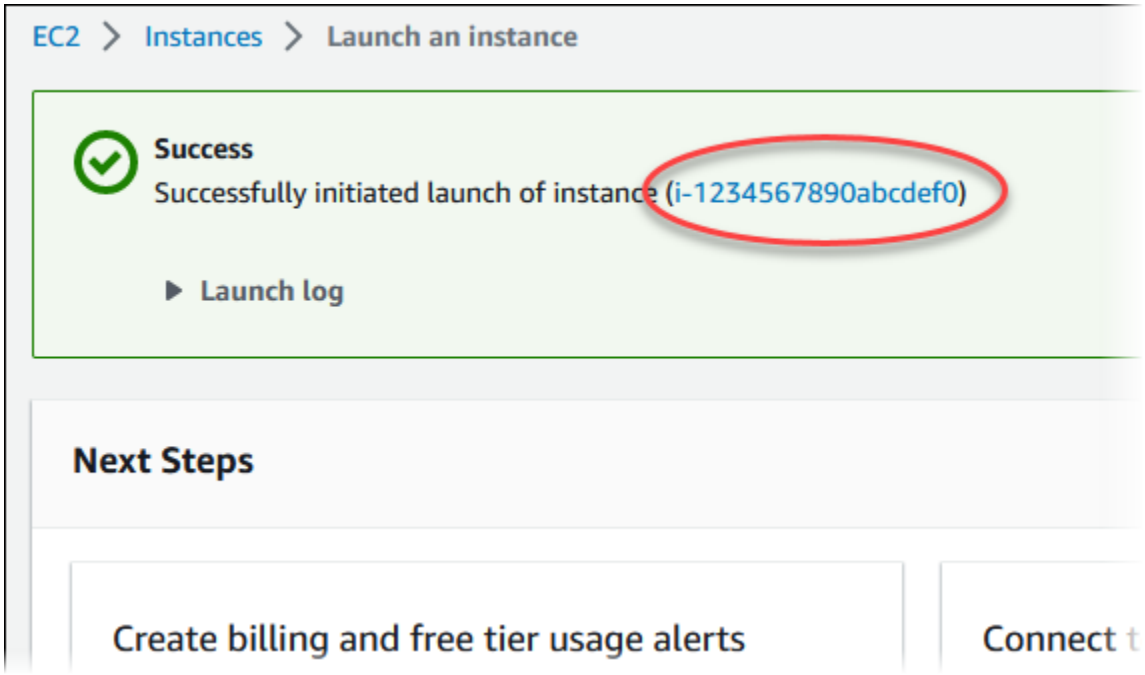

6. Choose the EC2 instance identifier to open the list of EC2 instances, and then select your EC2 instance.
7. In the **Details** tab, note the following values, which you need when you connect using SSH:
   a. In **Instance summary**, note the value for **Public IPv4 DNS**.

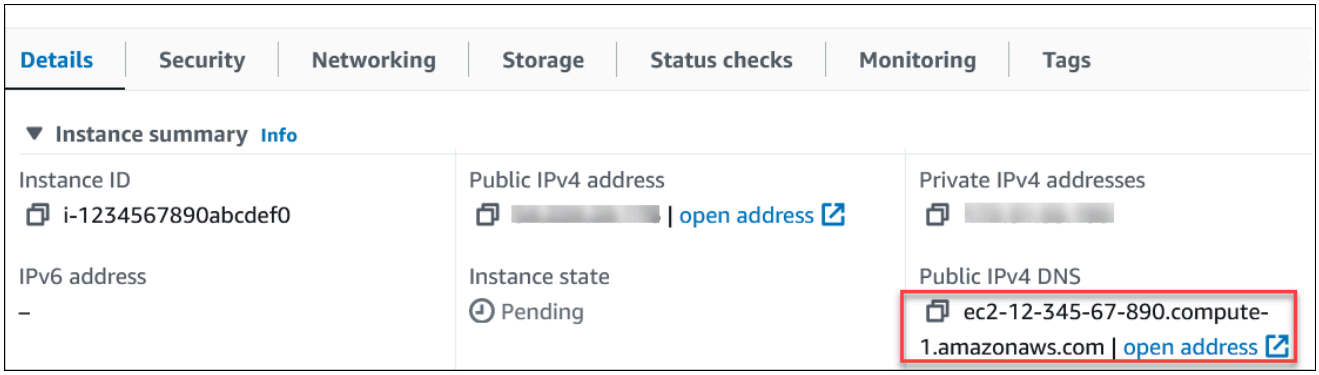

   b. In **Instance details**, note the value for **Key pair name**.

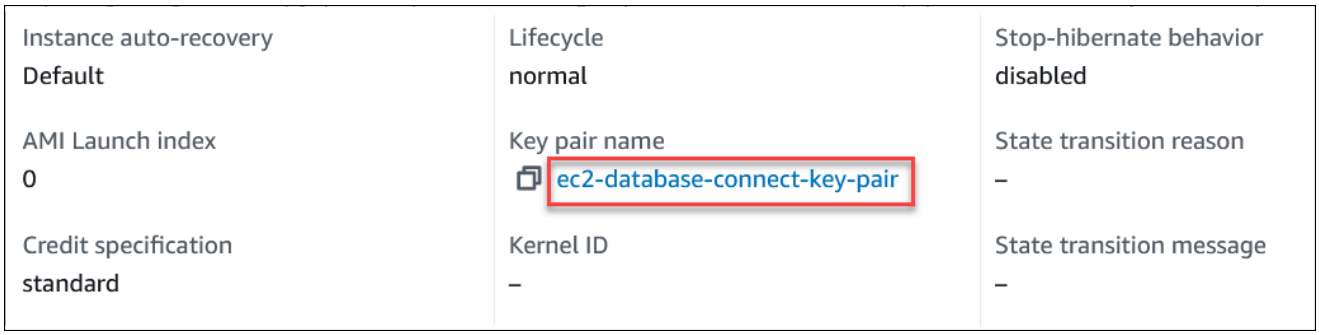


8. Wait until the **Instance state** for your EC2 instance has a status of **Running** before continuing.

Step 2: Create an Aurora PostgreSQL DB cluster

In this example, you use **Easy create** to create an Aurora PostgreSQL DB cluster with a db.t4g.large DB instance class.


To create an Aurora PostgreSQL DB cluster with Easy create

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the Amazon RDS console, choose the Amazon Web Services Region in which you want to create the DB cluster.
3. In the navigation pane, choose **Databases**.
4. Choose **Create database**, and make sure that **Easy create** is chosen.

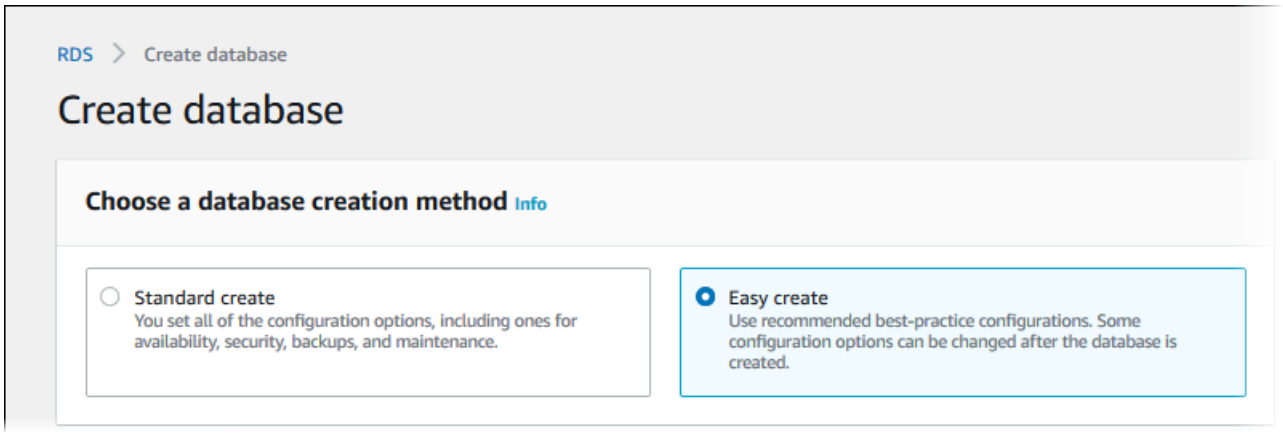

5. In **Configuration**, choose **Aurora (PostgreSQL Compatible)** for **Engine type**.
6. For **DB instance size**, choose **Dev/Test**.
7. For **DB cluster identifier**, enter **`database-test1`**.


   The **Create database** page should look similar to the following image.

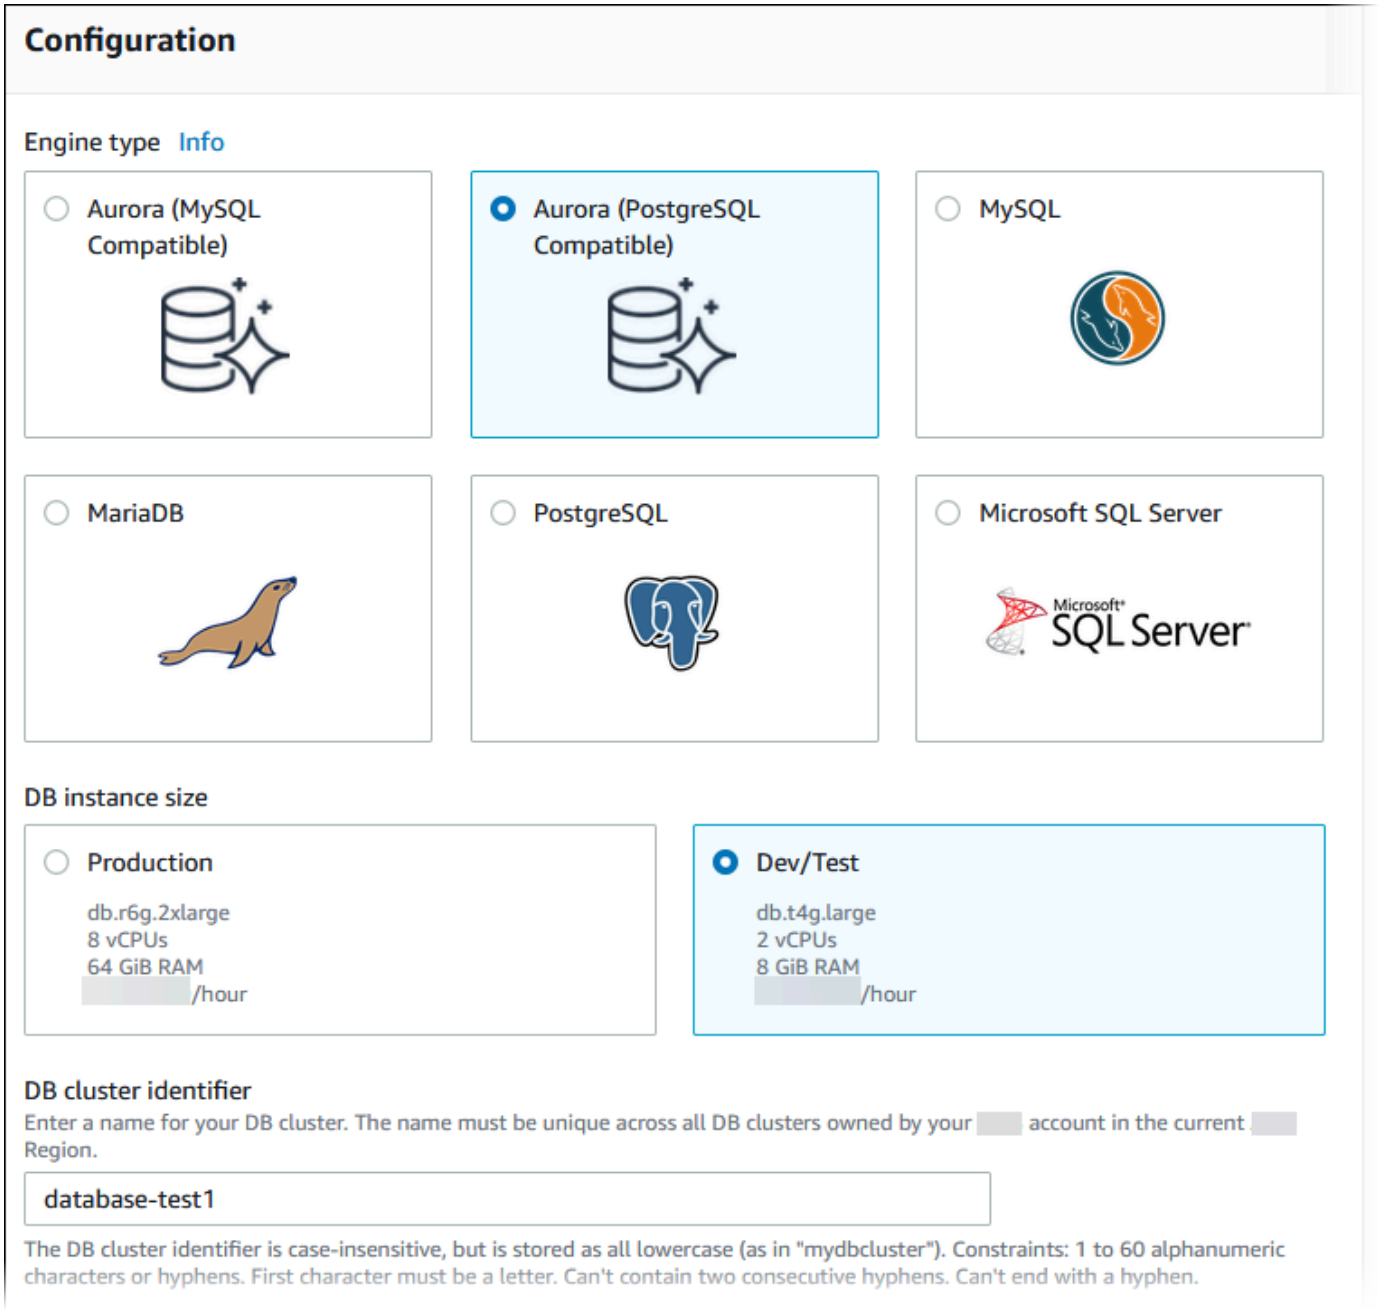

8. For **Master username**, enter a name for the user, or keep the default name (**`postgres`**).
9. To use an automatically generated master password for the DB cluster, select **Auto generate a password**.

   To enter your master password, make sure **Auto generate a password** is cleared, and then enter the same password in **Master password** and **Confirm password**.
10. To set up a connection with the EC2 instance you created previously, open **Set up EC2 connection - *optional***.

Select **Connect to an EC2 compute resource**. Choose the EC2 instance you created previously.

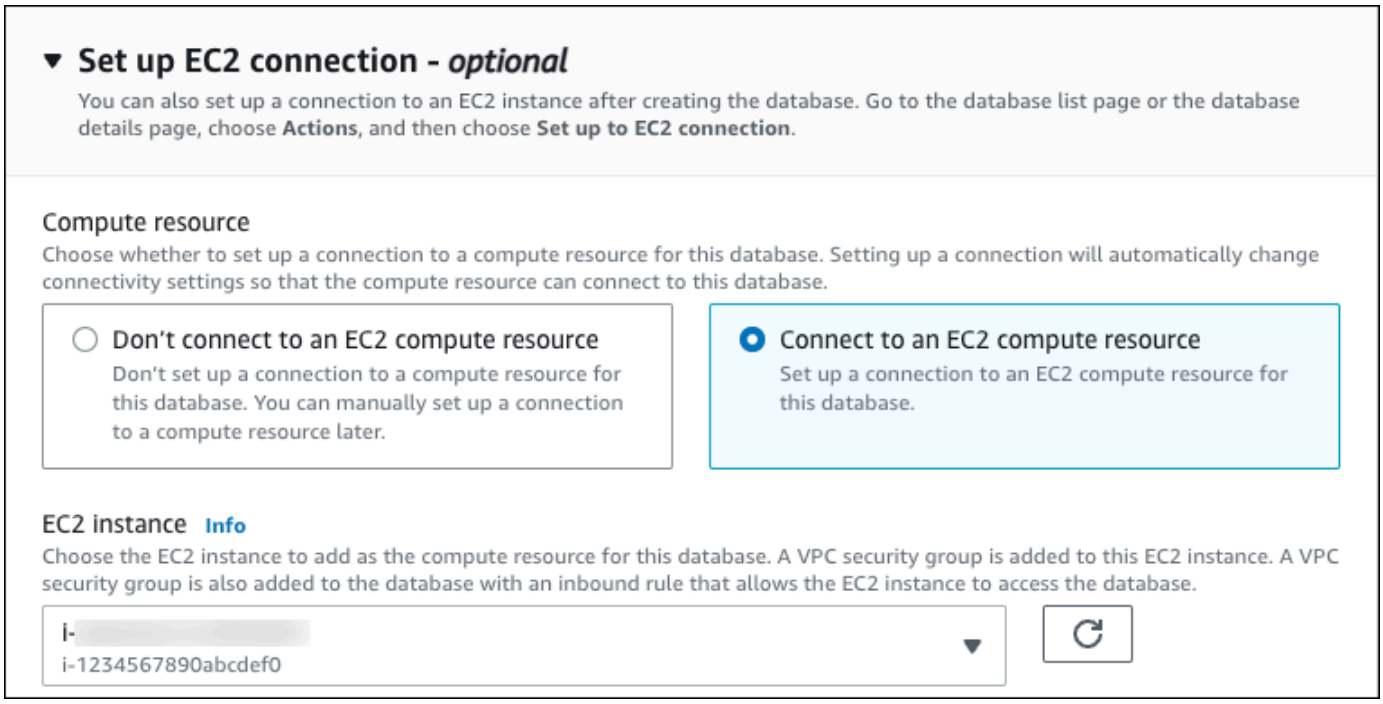

11. Open **View default settings for Easy create**.

View default settings for Easy create

Easy create sets the following configurations to their default values, some of which can be changed later. If you want to change any of these settings now, use **Standard create**.

Configuration	Value	Editable after database is created
Encryption	Enabled	No
VPC	Default VPC (vpc-1a2b3c4d)	No
Option group	default:aurora-postgresql-13	No
Subnet group	create-subnet-group	Yes
Automatic backups	Enabled	Yes
VPC security group	sg-1234567	Yes
Publicly accessible	No	Yes
Database port	5432	Yes
DB cluster identifier	database-test1	Yes
DB instance identifier	database-1	Yes
DB engine version	13.6	Yes
DB parameter group	default.aurora-postgresql13	Yes
DB cluster parameter group	default.aurora-postgresql13	Yes
Performance insights	Enabled	Yes
Monitoring	Enabled	Yes
Maintenance	Auto minor version upgrade enabled	Yes
Delete protection	Not enabled	Yes

You can examine the default settings used with **Easy create**. The **Editable after database is created** column shows which options you can change after you create the database.

- If a setting has **No** in that column, and you want a different setting, you can use **Standard create** to create the DB cluster.
- If a setting has **Yes** in that column, and you want a different setting, you can either use **Standard create** to create the DB cluster, or modify the DB cluster after you create it to change the setting.

12. Choose **Create database**.


    To view the master username and password for the DB cluster, choose **View credential details**.

    You can use the username and password that appears to connect to the DB cluster as the master user.

    > **Important**
    >
    > You can't view the master user password again. If you don't record it, you might have to change it.
    > If you need to change the master user password after the DB cluster is available, you can modify the DB cluster to do so. For more information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

13. In the **Databases** list, choose the name of the new Aurora PostgreSQL DB cluster to show its details.

    The writer instance has a status of **Creating** until the DB cluster is ready to use.

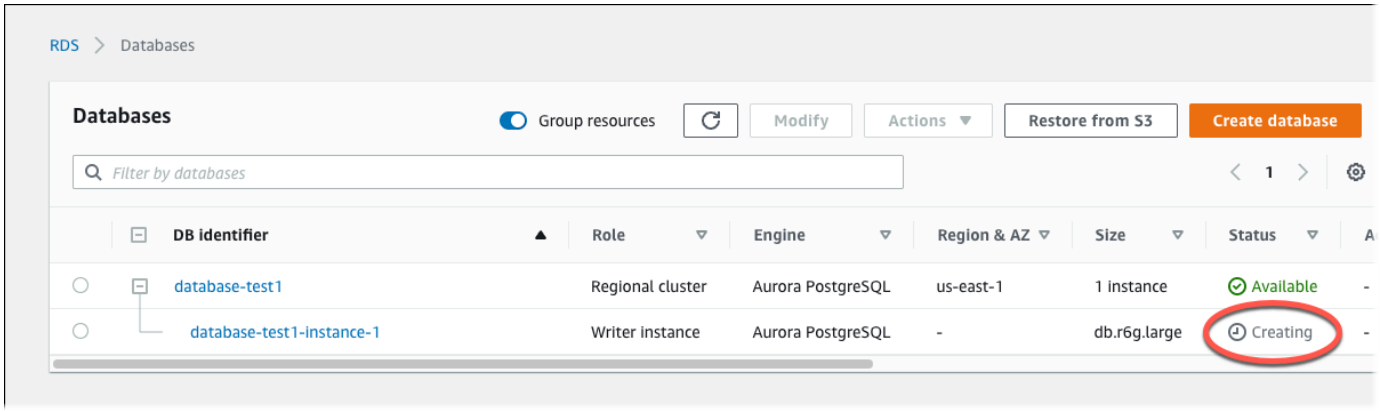

When the status of the writer instance changes to **Available**, you can connect to the DB cluster. Depending on the DB instance class and the amount of storage, it can take up to 20 minutes before the new DB cluster is available.

(Optional) Create VPC, EC2 instance, and Aurora PostgreSQL cluster using Amazon CloudFormation

Instead of using the console to create your VPC, EC2 instance, and Aurora PostgreSQL DB cluster, you can use Amazon CloudFormation to provision Amazon resources by treating infrastructure as code. To help you organize your Amazon resources into smaller and more manageable units, you can use the Amazon CloudFormation nested stack functionality. For more information, see Creating a stack on the Amazon CloudFormation console and Working with nested stacks.

> **Important**
>
> Amazon CloudFormation is free, but the resources that CloudFormation creates are live. You incur the standard usage fees for these resources until you terminate them. For more information, see Amazon Aurora Pricing.

To create your resources using the Amazon CloudFormation console, complete the following steps:

- Step 1: Download the CloudFormation template
- Step 2: Configure your resources using CloudFormation

Download the CloudFormation template

A CloudFormation template is a JSON or YAML text file that contains the configuration information about the resources you want to create in the stack. This template also creates a VPC and a bastion host for you along with the Aurora cluster.

To download the template file, open the following link, Aurora PostgreSQL CloudFormation template.

In the Github page, choose the *Download raw file* button to save the template YAML file.

Configure your resources using CloudFormation

> **Note**
>
> Before starting this process, make sure you have a Key pair for an EC2 instance in your Amazon Web Services account. For more information, see Amazon EC2 key pairs and Linux instances.

When you use the Amazon CloudFormation template, you must select the correct parameters to make sure your resources are created properly. Follow the steps below:

1. Sign in to the Amazon Web Services Management Console and open the Amazon CloudFormation console at https://console.amazonaws.cn/cloudformation.
2. Choose **Create Stack**.
3. In the Specify template section, select **Upload a template file from your computer**, and then choose **Next**.
4. In the **Specify stack details** page, set the following parameters:
   a. Set **Stack name** to **AurPostgreSQLTestStack**.
   b. Under **Parameters**, set **Availability Zones** by selecting two availability zones.
   c. Under **Linux Bastion Host configuration**, for **Key Name**, select a key pair to login to your EC2 instance.
   d. In **Linux Bastion Host configuration** settings, set the **Permitted IP range** to your IP address. To connect to EC2 instances in your VPC using Secure Shell (SSH), determine your public IP address using the service at https://checkip.amazonaws.com. An example of an IP address is 192.0.2.1/32.

      > **Warning**
      >
      > If you use `0.0.0.0/0` for SSH access, you make it possible for all IP addresses to access your public EC2 instances using SSH. This approach is acceptable for a short time in a test environment, but it's unsafe for production environments. In production, authorize only a specific IP address or range of addresses to access your EC2 instances using SSH.

   e. Under **Database General configuration**, set **Database instance class** to **db.t4g.large**.

f. Set **Database name** to **`database-test1`**.

g. For **Database master username**, enter a name for the master user.

h. Set **Manage DB master user password with Secrets Manager** to `false` for this tutorial.

i. For **Database password**, set a password of your choice. Remember this password for further steps in the tutorial.

j. Set **Multi-AZ deployment** to `false`.

k. Leave all other settings as the default values. Choose **Next** to continue.

5. In the **Configure stack options** page, leave all the default options. Choose **Next** to continue.

6. In the **Review stack** page, select **Submit** after checking the database and Linux bastion host options.

After the stack creation process completes, view the stacks with names *BastionStack* and *APGNS* to note the information you need to connect to the database. For more information, see Viewing Amazon CloudFormation stack data and resources on the Amazon Web Services Management Console.

Step 3: Connect to an Aurora PostgreSQL DB cluster

You can use any standard PostgreSQL client application to connect to the DB cluster. In this example, you connect to the Aurora PostgreSQL DB cluster using the psql command line client.

To connect to the Aurora PostgreSQL DB cluster

1. Find the endpoint (DNS name) and port number of the writer instance for your DB cluster.


   a. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

   b. In the Amazon RDS console, choose the Amazon Web Services Region for the DB cluster.

   c. In the navigation pane, choose **Databases**.

   d. Choose the Aurora PostgreSQL DB cluster name to display its details.

   e. On the **Connectivity & security** tab, copy the endpoint of the writer instance. Also, note the port number. You need both the endpoint and the port number to connect to the DB cluster.

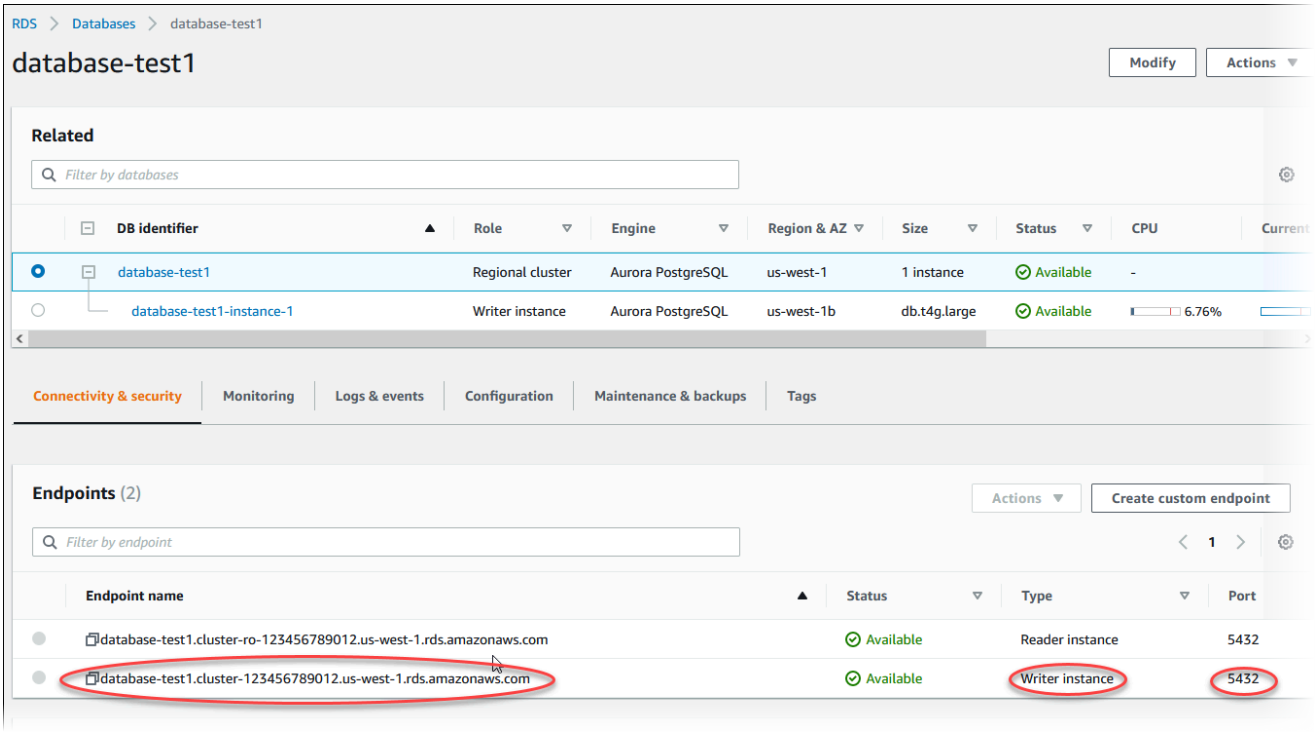

2. Connect to the EC2 instance that you created earlier by following the steps in Connect to your Linux instance in the *Amazon EC2 User Guide*.

   We recommend that you connect to your EC2 instance using SSH. If the SSH client utility is installed on Windows, Linux, or Mac, you can connect to the instance using the following command format:

   ```
   ssh -i location_of_pem_file ec2-user@ec2-instance-public-dns-name
   ```

   For example, assume that `ec2-database-connect-key-pair.pem` is stored in `/dir1` on Linux, and the public IPv4 DNS for your EC2 instance is `ec2-12-345-678-90.compute-1.amazonaws.com`. Your SSH command would look as follows:

   ```
   ssh -i /dir1/ec2-database-connect-key-pair.pem ec2-
   user@ec2-12-345-678-90.compute-1.amazonaws.com
   ```

3. Get the latest bug fixes and security updates by updating the software on your EC2 instance. To do so, use the following command.

> **Note**
>
> The `-y` option installs the updates without asking for confirmation. To examine updates before installing, omit this option.

```
sudo dnf update -y
```

4. Install the psql command line client from PostgreSQL on Amazon Linux 2023, using the following command:

```
sudo dnf install postgresql15
```

5. Connect to the Aurora PostgreSQL DB cluster. For example, enter the following command. This action lets you connect to the Aurora PostgreSQL DB cluster using the psql client.

   Substitute the endpoint of the writer instance for *`endpoint`*, substitute the database name `--dbname` that you want to connect to for *`postgres`*, and substitute the master username that you used for *`postgres`*. Provide the master password that you used when prompted for a password.

```
psql --host=endpoint --port=5432 --dbname=postgres --username=postgres
```

   After you enter the password for the user, you should see output similar to the following.

```
psql (14.3, server 14.6)
SSL connection (protocol: TLSv1.2, cipher: ECDHE-RSA-AES256-GCM-SHA384, bits: 256,
 compression: off)
Type "help" for help.

postgres=>
```

   For more information about connecting to an Aurora PostgreSQL DB cluster, see Connecting to an Amazon Aurora PostgreSQL DB cluster. If you can't connect to your DB cluster, see Can't connect to Amazon RDS DB instance.

   For security, it is a best practice to use encrypted connections. Only use an unencrypted PostgreSQL connection when the client and server are in the same VPC and the network is

trusted. For information about using encrypted connections, see Securing Aurora PostgreSQL data with SSL/TLS.

6. Run SQL commands.

   For example, the following SQL command shows the current date and time:

```
SELECT CURRENT_TIMESTAMP;
```

Step 4: Delete the EC2 instance and DB cluster

After you connect to and explore the sample EC2 instance and DB cluster that you created, delete them so you're no longer charged for them.

If you used Amazon CloudFormation to create resources, skip this step and go to the next step.

To delete the EC2 instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon EC2 console at https://console.amazonaws.cn/ec2/.
2. In the navigation pane, choose **Instances**.
3. Select the EC2 instance, and choose **Instance state, Terminate instance**.
4. Choose **Terminate** when prompted for confirmation.

For more information about deleting an EC2 instance, see Terminate your instance in the *Amazon EC2 User Guide*.

To delete a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases** and then choose the DB instance associated with the DB cluster.
3. For **Actions**, choose **Delete**.
4. Choose **Delete**.

   After all of the DB instances associated with a DB cluster are deleted, the DB cluster is deleted automatically.

(Optional) Delete the EC2 instance and DB cluster created with CloudFormation

If you used Amazon CloudFormation to create resources, delete the CloudFormation stack after you connect to and explore the sample EC2 instance and DB cluster, so you're no longer charged for them.

To delete the CloudFormation resources

1. Open the Amazon CloudFormation console.
2. On the **Stacks** page in the CloudFormation console, select the root stack (the stack without the name VPCStack, BastionStack or APGNS).
3. Choose **Delete**.
4. Select **Delete stack** when prompted for confirmation.

For more information about deleting a stack in CloudFormation, see Deleting a stack on the Amazon CloudFormation console in the *Amazon CloudFormation User Guide*.

(Optional) Connect your DB cluster to a Lambda function

You can also connect your Aurora PostgreSQL DB cluster to a Lambda serverless compute resource. Lambda functions allow you to run code without provisioning or managing infrastructure. A Lambda function also allows you to automatically respond to code execution requests at any scale, from a dozen events a day to hundreds of per second. For more information, see Automatically connecting a Lambda function and an Aurora DB cluster.

Create with express configuration

You can create and connect to an Aurora PostgreSQL serverless database in seconds using express configuration which provides a streamlined database creation experience with preconfigured defaults to help you get started easily and quickly.

In two clicks, you can have an Aurora cluster with a serverless instance ready to use in seconds. You can also use the Amazon Command Line Interface (Amazon CLI) or Amazon SDKs with the parameter `--with-express-configuration` to create both a cluster and an instance within the cluster with single API call which makes it ready for running queries in seconds. You have the flexibility to modify most of the settings during, and most other settings after the database creation. For more information about these settings, see Express configuration settings. Once

created, you have access to most of the features and benefits of Aurora such as the ability to add readers for high availability and scalability, and automatic failover capabilities. Some options, such as specifying a customer managed encryption key, selecting specific engine versions, or associating the clusters with an Amazon Virtual Private Cloud (VPC), are only available when using the the section called "Create with full configuration" option. This creation experience for Aurora PostgreSQL is also available with the Amazon Free Tier.

Topics

- Prerequisites
- Supported Regions
- Internet access gateway
- Creating a DB cluster with express configuration
- Express configuration settings
- Connecting to clusters with express configuration
- Restoring a cluster created through express configuration
- Limitations

Prerequisites

Before you can create an Aurora PostgreSQL DB cluster with express configuration, you must at minimum have the following permissions:

- `ec2:DescribeAvailabilityZones`
- `iam:CreateServiceLinkedRole`
- `rds:CreateDBCluster`
- `rds:CreateDBInstance`
- `rds:EnableInternetAccessGateway`

Supported Regions

You can create an Aurora PostgreSQL serverless cluster with express configuration in all Amazon Web Services Regions except the Amazon GovCloud (US), Middle East (UAE), and Middle East (Bahrain) Regions.

Internet access gateway

Aurora also provides an internet access gateway enabled by default to connect securely with the clusters created through express configuration. This feature is currently supported only for express configuration clusters. It supports the PostgreSQL wire protocol and enables you to connect through the internet from a wide range of tools and development platforms that may be running outside of you Amazon infrastructure - no VPN or Amazon Direct Connect required. The gateway is distributed across multiple Availability Zones, offering the same level of high availability as your Aurora cluster. It is a managed component of Aurora, so there are no software updates or patches that need to be applied by you.

The internet access gateway is integrated with Amazon Identity and Access Management (IAM), allowing you to enforce identity-based permissions for authorized access and safeguard your data with ephemeral token-based access. When using the gateway, the required setup for the database administrator user, including granting the rds_iam role, is automatically managed for you.

Creating a DB cluster with express configuration


You can create an Aurora PostgreSQL DB cluster with express configuration using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console


To create with express configuration using the console:

To create with express configuration using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.aws.amazon.com/rds/.
2. In the Amazon Web Services Management Console, choose the Amazon Region in which you want to create the DB cluster.
3. In the navigation pane, choose Databases.
4. On the Welcome to Aurora and RDS page, locate the Create with express configuration in seconds section, and choose Create.

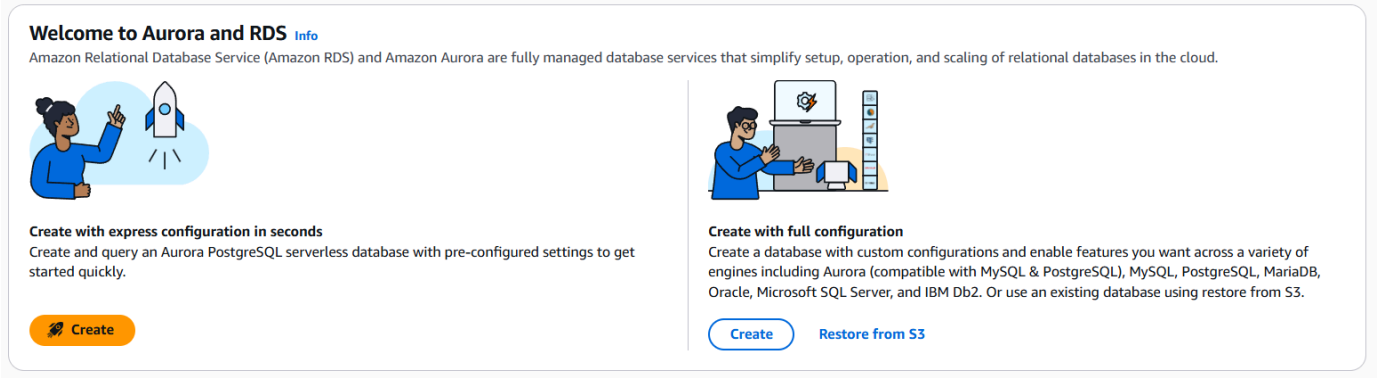


5. Review pre-configured settings in the Create with express configuration dialog.

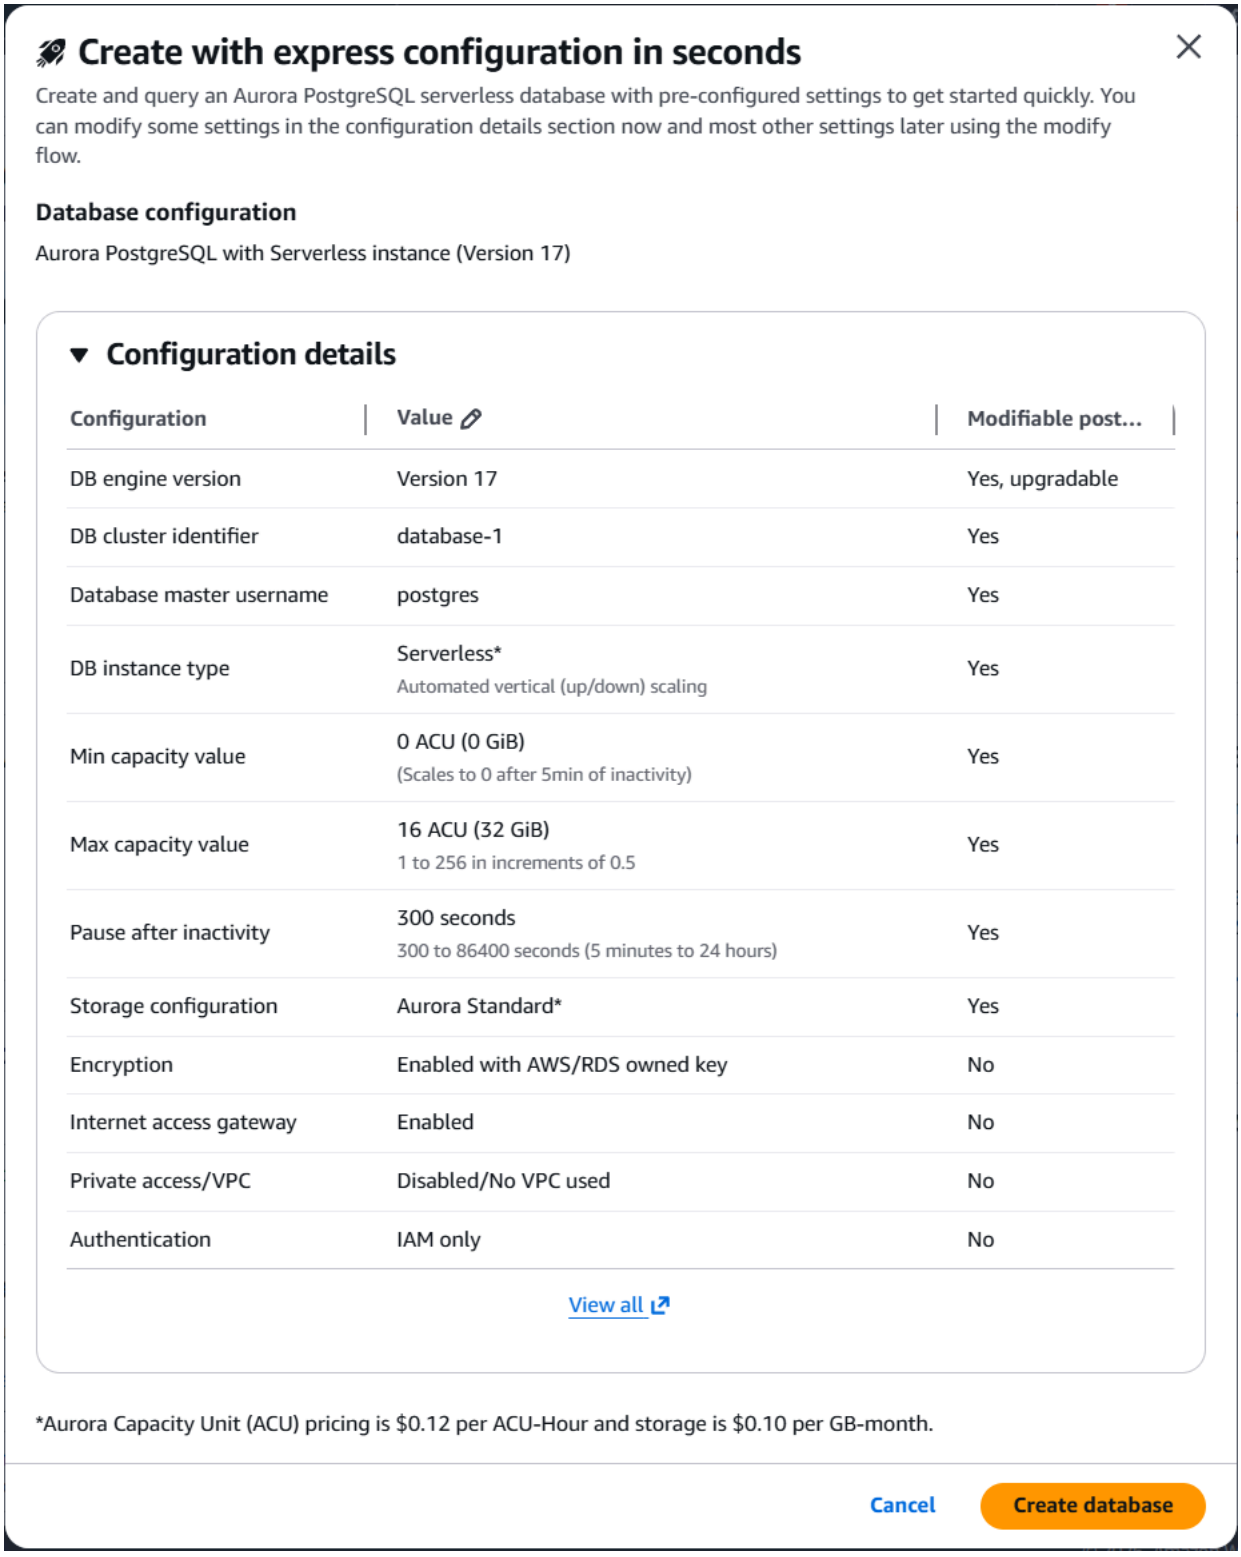

6. (Optional) Modify the DB cluster identifier or the capacity range as per your need.
7. Choose Create database.

8. Your Aurora PostgreSQL Serverless database should be ready in seconds. A success banner confirms the creation, and the database status changes to "Available".

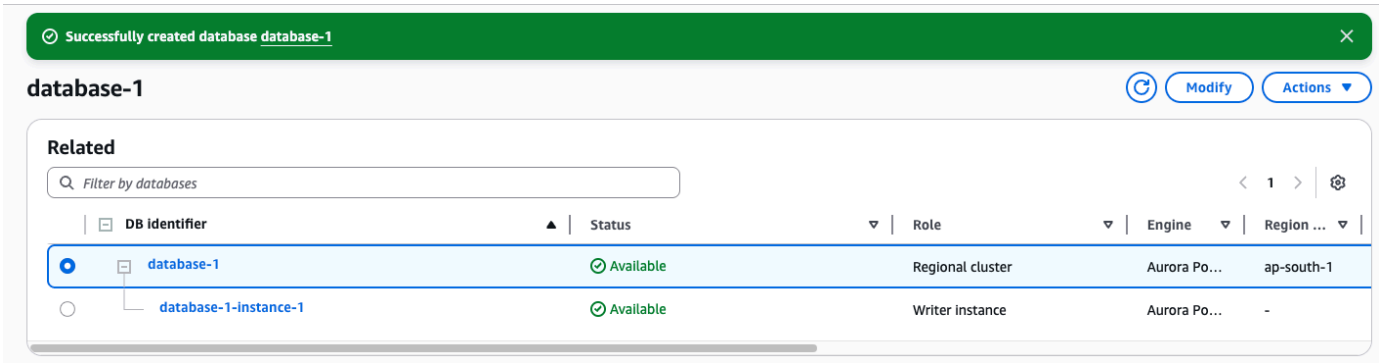

CLI

You can use the Amazon CLI to create an Aurora PostgreSQL clusters with express configuration.

For Linux or MacOS.

```
aws rds create-db-cluster --db-cluster-identifier sample-express-cluster \
    --engine aurora-postgresql \
    --with-express-configuration
```

For Windows:

```
aws rds create-db-cluster --db-cluster-identifier sample-express-cluster ^
    --engine aurora-postgresql ^
    --with-express-configuration
```

The express configuration parameter takes care of creating a database cluster, an Aurora serverless instance, setting up the internet access gateway, and IAM authentication for the admin database user (default = postgres).

API

You can use the relevant Amazon SDK and call the CreateDBCluster operation to create a DB cluster and database instance with the express configuration.

Express configuration settings

The following table describes the settings for express configuration and indicates whether they can be modified after creation.

Setting	Setting description	Default Setting and Limitations
Auto minor version upgrade	This setting enables your Aurora DB cluster to receive preferred minor version upgrades to the DB engine automatically when they become available. For more informati on about engine updates for Aurora PostgreSQL, see Database engine updates for Amazon Aurora PostgreSQL.	Enabled by default. Can be changed after the create operation completes .
Amazon KMS key	Clusters with express configuration are encrypted with Amazon/RDS Service owned keys.	Enabled with Amazon/RDS service owned key. Cannot be modified.
Certificate authority	Clusters with express configuration are enabled with internet access gateway, which uses the Amazon root certificates. For more informati on, see ACM root CAs	Not applicable for connecting through internet access gateway
Cluster storage configuration	The storage type for the DB cluster: Aurora Standard or Aurora I/O-Optimized. For more informati on, see Storage Configurations for Amazon Aurora DB clusters.	Aurora Standard by default. Can be changed after the create operation completes.
Copy tags to snapshots	Choose this option to copy any DB instance tags to a DB snapshot when you create a snapshot. For more information, see Tagging Amazon Aurora and Amazon RDS resources.	Disabled by default. Can be changed during creation or after the creation.
Database authentication	Clusters with express configuration and internet access gateway only support IAM authentication. For	Enabled with IAM Authentication by default. Cannot be modified.

Setting	Setting description	Default Setting and Limitations
	more information, see IAM database authentication.	
Database port	Clusters with express configuration and internet access gateway only support the default PostgreSQL port	Default value = 5432. Cannot be modified.
DB cluster identifier	Enter a name for your DB cluster that is unique for your account in the Amazon Region that you chose. This identifier is used in the cluster endpoint address for your DB cluster. For information on the cluster endpoint, see Amazon Aurora endpoint connections. The DB cluster identifier has the following constraints: It must contain from 1 to 63 alphanumeric characters or hyphens. Its first character must be a letter. It cannot end with a hyphen or contain two consecutive hyphens. It must be unique for all DB clusters per Amazon account, per Amazon Region.	Required parameter. Can be changed during creation or after the creation.
DB cluster parameter group	Clusters with express configuration use the Aurora default DB cluster parameter group.	Default parameter group. Can be changed after the create operation completes.
DB instance class	Clusters with express configura tion start with an Aurora serverless instance.	Aurora serverless instance. Can be changed after the create operation completes.

Setting	Setting description	Default Setting and Limitations
DB subnet group	Clusters with express configuration are not created within your VPC. Access is through the Aurora internet access gateway	No VPC associated. Cannot be set.
Enable deletion protection	Choose Enable deletion protection to prevent your DB cluster from being deleted. If you create a production DB cluster with the console, deletion protection is enabled by default.	Disabled by default. Can be changed during or after the creation completes.
Enable encryption	Clusters with express configuration are encrypted with Amazon/RDS Service owned keys.	Enabled with Amazon/RDS service owned key. Cannot be modified.
Enable Enhanced Monitoring	Choose Enable enhanced monitoring to enable gathering metrics in real time for the operating system that your DB cluster runs on. For more information, see Monitoring OS metrics with Enhanced Monitoring.	Disabled by default. Can be changed after the create operation completes.
Enable the RDS Data API	Choose Enable the RDS Data API to enable RDS Data API (Data API). Data API provides a secure HTTP endpoint for running SQL statements without managing connections. For more information, see Using the Amazon RDS Data API.	Disabled by default. Can be changed after the create operation completes.
Engine type	Clusters with express configuration clusters are only supported with Aurora PostgreSQL	Required paramater. Supported value: "aurora-postgresql". Cannot be modified.

Setting	Setting description	Default Setting and Limitations
Engine version	Clusters with express configuration use the default major and minor version. See Aurora versions, for details on default versions.	Default major and minor version. Engine version can be upgraded later.
Failover priority	Choose a failover priority for the instance. If you don't choose a value, the default is tier-1. This priority determines the order in which Aurora Replicas are promoted when recovering from a primary instance failure. For more information, see Fault tolerance for an Aurora DB cluster.	Default value = 1. Can be changed after the create operation completes .
Initial database name	The name for your default database. If you don't provide a name for an Aurora PostgreSQL DB cluster, Amazon RDS creates a database named postgres. For Aurora PostgreSQL, the default database name has these constraints: It must contain 1–63 alphanumeric characters. It must begin with a letter. Subsequent characters can be letters, underscores, or digits (0–9). It can't be a word reserved by the database engine. To create additional databases, connect to the DB cluster and use the SQL command CREATE DATABASE. For more information about connecting to the DB cluster, see Connecting to an Amazon Aurora DB cluster with internet access gateway.	Default value = postgres. Can be changed during or after the creation completes.

Setting	Setting description	Default Setting and Limitations
Log exports	In the Log exports section, choose the logs that you want to start publishing to Amazon CloudWatch Logs. For more information about publishing Aurora MySQL logs to CloudWatch Logs, see Publishing Aurora MySQL logs to Amazon CloudWatch Logs. For more information about publishing Aurora PostgreSQL logs to CloudWatch Logs, see Publishing Aurora PostgreSQL logs to Amazon CloudWatch Logs.	Disabled by default. Can be changed during or after the creation.
Maintenance window	Choose Select window and specify the weekly time range during which system maintenance can occur. Or choose No preference for Amazon RDS to assign a period randomly.	Default maintenance window varies by Region. Can be changed during or after the creation.
Manage master credentials in Amazon Secrets Manager	Clusters with express configuration and internet access gateway support IAM authentication only. This setting does not apply.	N/A
Master password	Clusters with express configuration and internet access gateway support IAM authentication only. This setting does not apply.	N/A
Master user authentication type	Clusters with express configuration automatically sets authentication type to IAM authentication.	Supported Value = iam-db-auth. Cannot be modified.

Setting	Setting description	Default Setting and Limitations
Master username	Enter a name to use as the master username to log on to your DB cluster. For Aurora PostgreSQL, it must contain 1–63 alphanumeric characters. The first character must be a letter. The name can't be a word reserved by the database engine. You can't change the master username after the DB cluster is created.	Default value = postgres. Can be changed during or after the creation.
Multi-AZ deployment	Clusters with express configuration are not associated with an VPC, and availability zones are automatically chosen for you. You can add read replicas after the database is created.	Availability zones are automatically chosen. The writer and reader instances are placed in different availability zones.
Network type	Clusters with express configuration are not associated with an VPC.	Not Applicable
Public access	Clusters with express configuration are created with the internet access gateway, which offers secure internet access with built-in integration with Amazon Identity and Access Management and Amazon Shield.	Not Applicable

Setting	Setting description	Default Setting and Limitations
RDS Extended Support	Select Enable RDS Extended Support to allow supported major engine versions to continue running past the Aurora end of standard support date. When you create a DB cluster, Amazon Aurora defaults to RDS Extended Support. To prevent the creation of a new DB cluster after the Aurora end of standard support date and to avoid charges for RDS Extended Support, disable this setting. Your existing DB clusters won't incur charges until the RDS Extended Support pricing start date. For more information, see Amazon RDS Extended Support with Amazon Aurora.	Not supported
RDS Proxy	RDS Proxy is not supported with clusters that are not associated with a VPC. For more information, see Amazon RDS Proxy for Aurora.	Not supported
Retention period	Choose the length of time, from 1 to 35 days, that Aurora retains backup copies of the database. Backup copies can be used for point-in-time restores (PITR) of your database down to the second.	Default value = 1. Can be changed after the create operation completes .
Backup window	A 30-minute window selected at random from an 8-hour block of time to take automatic backup of your database.	Uses the default parameter group. Can be changed later using parameter groups.

Setting	Setting description	Default Setting and Limitations
Turn on DevOps Guru	DevOps Guru for RDS provides detailed analysis of performance anomalies, Performance Insights must be turned on. For more information, see Setting up DevOps Guru for RDS.	Disabled by default. Can be changed after the create operation completes .
Turn on Performance Insights	Amazon RDS Performance Insights provides monitoring information for your database. For more informati on, see Monitoring DB load with Performance Insights on Amazon Aurora.	Disabled by default. Can be changed after the create operation completes .
Virtual Private Cloud (VPC)	Clusters with express configuration are not associated with an VPC	N/A
VPC security group (firewall)	Clusters with express configuration are not associated with an VPC	N/A
Write forwardin g	Enables you to forward writes sent on the reader endpoint to the writer node for processing. Enables achieving read-after-write consistency. For more information see, Local write forwarding in Aurora PostgreSQL.	Disabled by default. Can be changed after the create operation completes .

Connecting to clusters with express configuration

Clusters created with express configuration are automatically set up with an internet access gateway, which provides public access to your database with IAM authentication. Ensure that the IAM identity you use to connect to the database has permissions to rds-db:connect to generate the authentication token needed to access the database. To learn more, see IAM database authentication.

The following guide demonstrates how to use the various options in the "Connectivity & Security" tab in the Amazon Web Services Management Console to connect to your database.

The RDS Console surfaces relevant information such as code snippets, endpoint details, and other connection details to help you connect to the database. It also offers a utility to generate a token and direct access through Amazon CloudShell. Both the generate token utility and CloudShell connect using the master username you set up at the time of database creation.

Using the Connectivity & security tab

After your database is created, navigate to the Connectivity & security tab to access connection options. The Connect to database section provides three methods for connecting:

Code snippets

Use when connecting through SDK, APIs, or third-party tools. The console provides ready-to-use code snippets for your selected programming language. The snippets also dynamically reflect the authentication configuration for your database.

The following steps show connecting to your database cluster using the psql command line utility code snippet.

Prerequisites


- You can connect to Aurora PostgreSQL DB clusters by using tools like psql, the PostgreSQL interactive terminal. To install psql and learn more about using the PostgreSQL interactive terminal, see psql in the PostgreSQL documentation.
- You must have the latest version of the Amazon CLI installed. To install or update the Amazon CLI, see Installing or updating to the latest version of the Amazon CLI.

Connecting with psql

To connect with psql

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.aws.amazon.com/rds/.
2. Navigate to your database cluster from the Databases list tab.
3. Under the connectivity & Security tab, select the PSQL code snippet for your respective operating system (macOS, linux, or Windows).

4. Copy the code shown in connection steps modal.

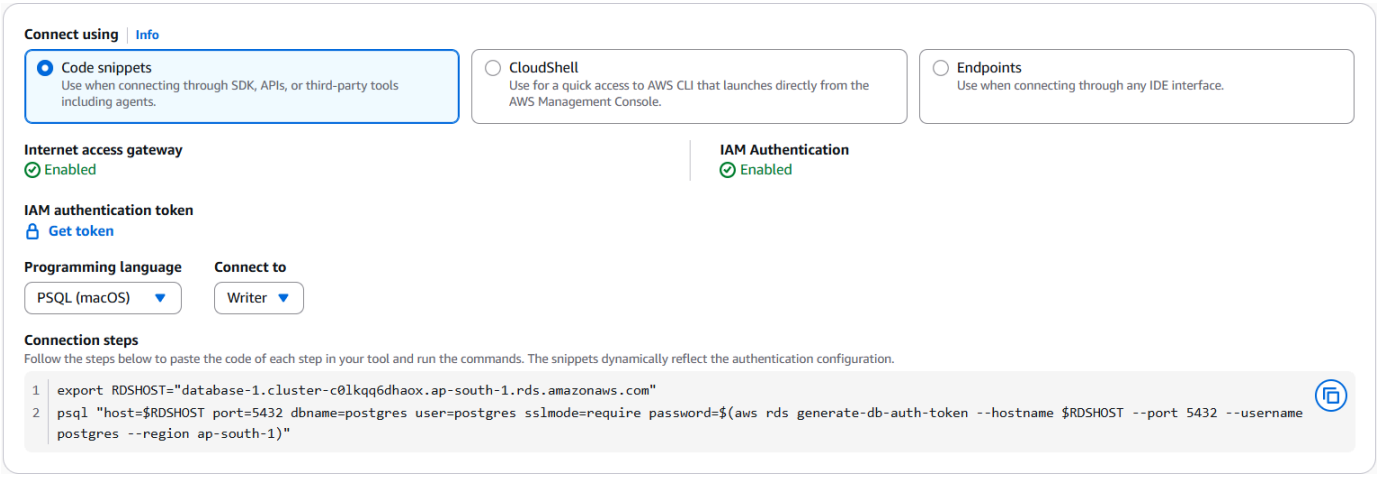

5. Open a terminal on your local development environment / machine.
6. (optional) If you have already configured the Amazon CLI and credentials, you can skip this step. Otherwise, use the following command for a temporary login session.

```
aws login
```

7. Paste the command you copied in step 4. You should see psql login and the “postgres =>” prompt, enabling you to run SQL commands.

CloudShell

The console provides an automated way to connect to your cluster using Amazon CloudShell. The following guide shows the steps to connect using psql and CloudShell.

Prerequisites


None

Using CloudShell and PSQL


To connect using CloudShell and PSQL

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.aws.amazon.com/rds/.
2. Navigate to your database cluster from the Databases list tab.
3. Under the connectivity & Security tab, select CloudShell.


4. Choose **Launch Cloudshell**

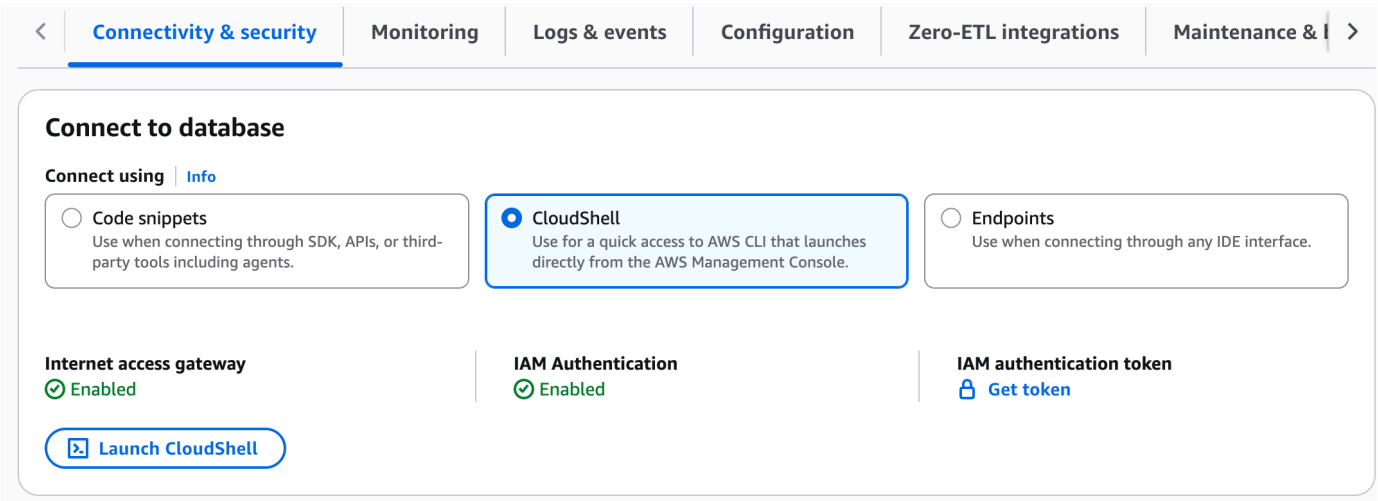

5. Choose **Run** on the prompt window. The command is prepopulated with relevant information to connect to your specific cluster.

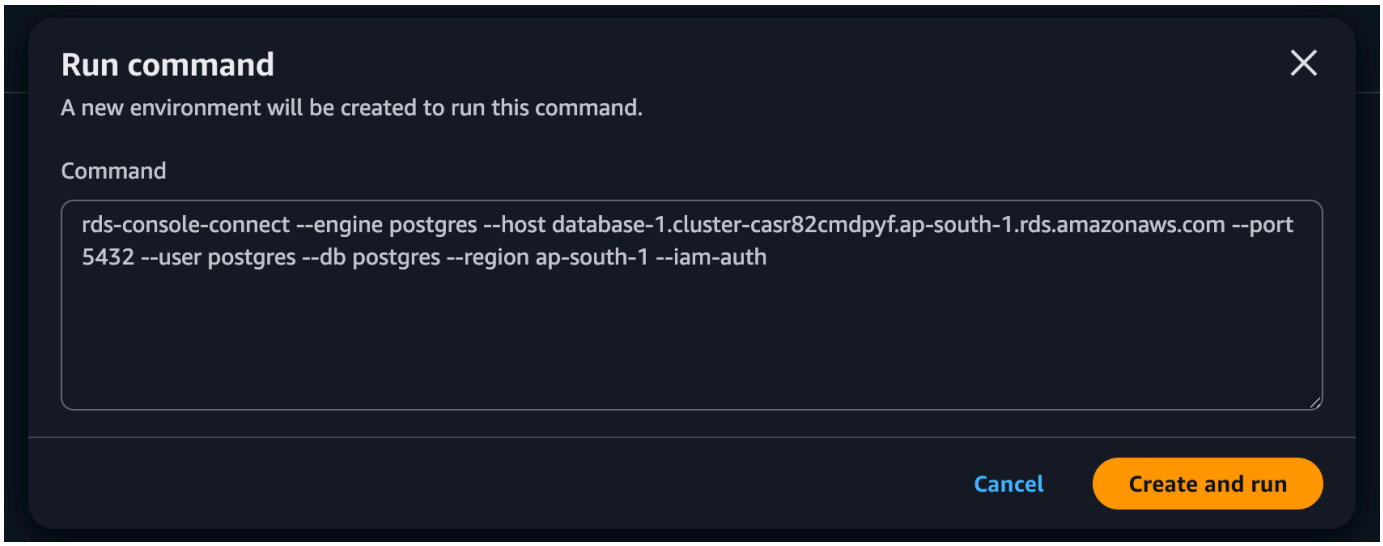

6. You should see psql login and the “postgres =>” prompt, enabling you to run SQL commands.

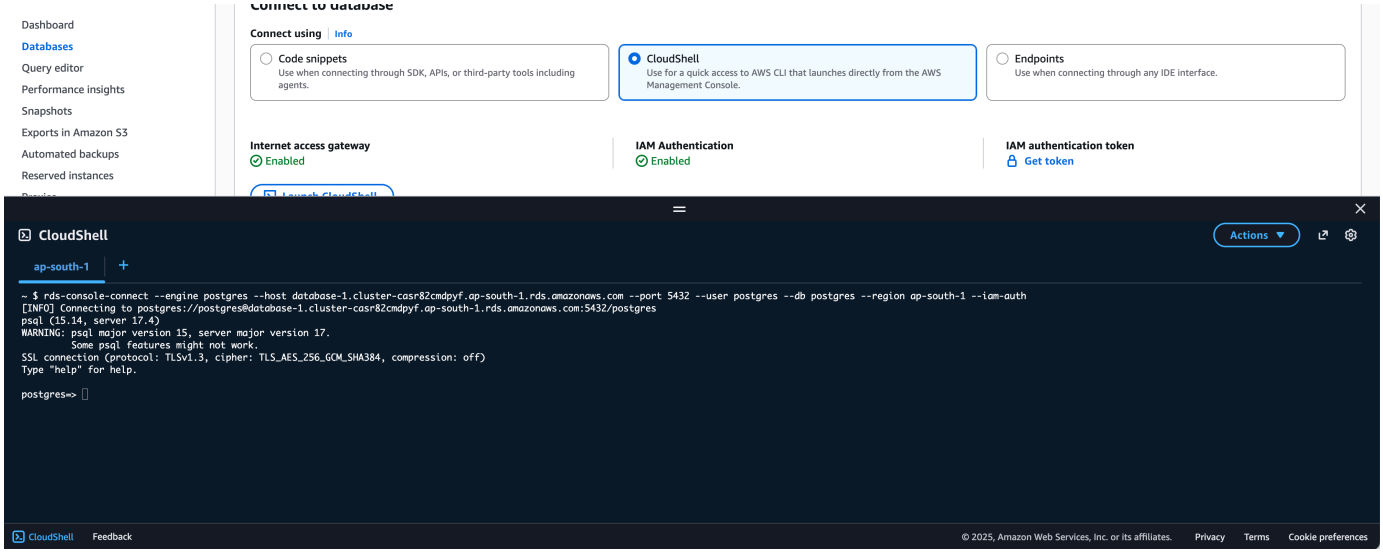

Use for quick access to Amazon CLI that launches directly from the Amazon Web Services Management Console. CloudShell provides a browser-based shell environment with pre-authenticated Amazon CLI access.

Endpoints with Get token utility

If you are using tools that only support using username and password credentials, you can use the Get token utility to connect. In this case, you use the token generated by the utility in the password field. The token is generated for the master username that you setup at the time of creating the database. The token is valid for 15 minutes at a time. If the tool you are using terminates the connection, you would need to generate the token again.

The following steps show, how to use the Get token utility to connect to your database cluster using pgAdmin.

Prerequisites


- You can use the pgAdmin utility to connect to Aurora PostgreSQL DB clusters by using a UI interface. For more information, see the Download page from the pgAdmin website.

Connecting to pgAdmin


To connect using pgAdmin

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.aws.amazon.com/rds/.


2. Navigate to your database cluster from the Databases list tab.
3. Under the connectivity & Security tab, select the “Endpoints” tab.

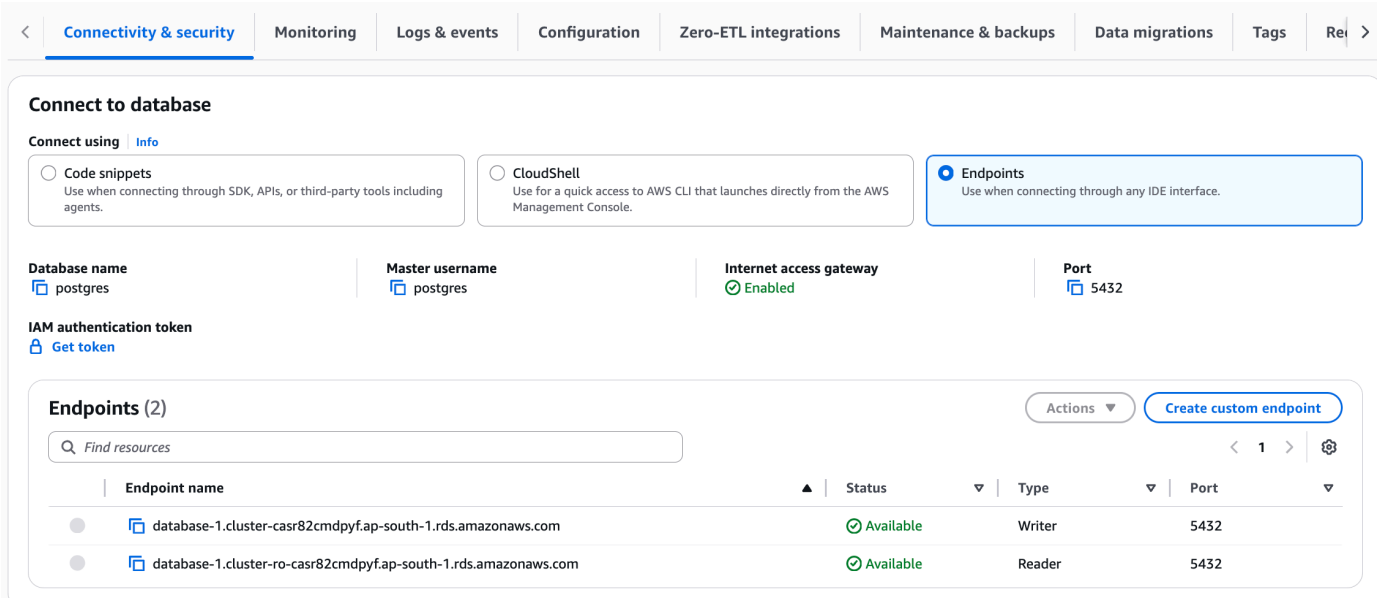

4. Copy the relevant information, including the writer endpoint, port, master username, and database name.
5. Generate and copy a new token (short lived password) from the Get token utility.

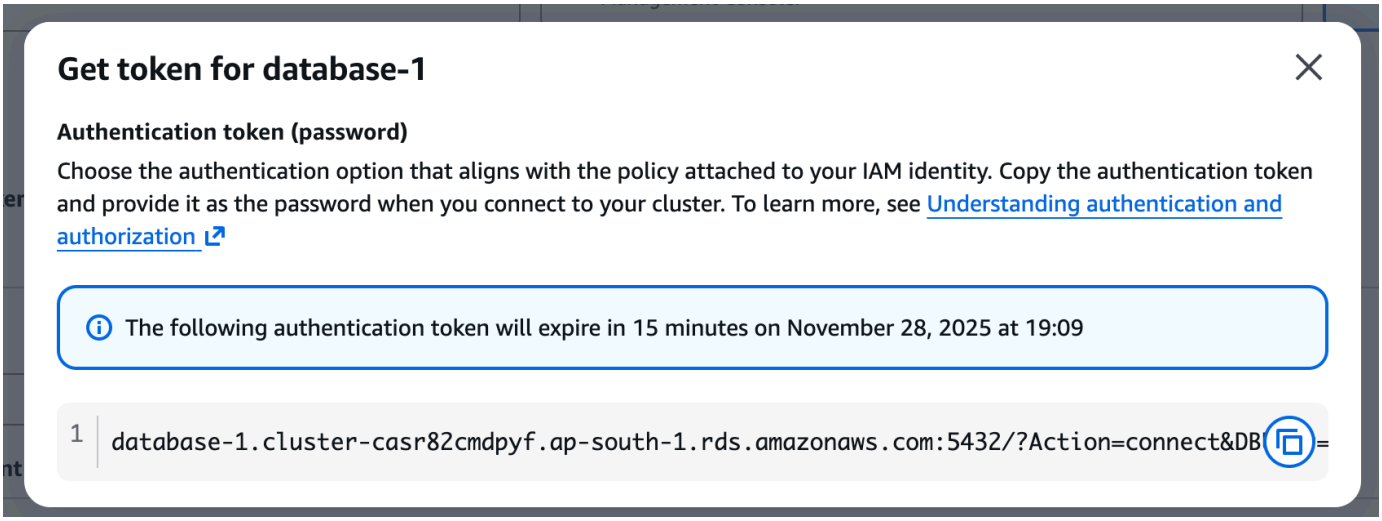

6. Open pgAdmin on your machine, and “Add a new server”. Enter the details in the Connection tab. Use the token in the password field.

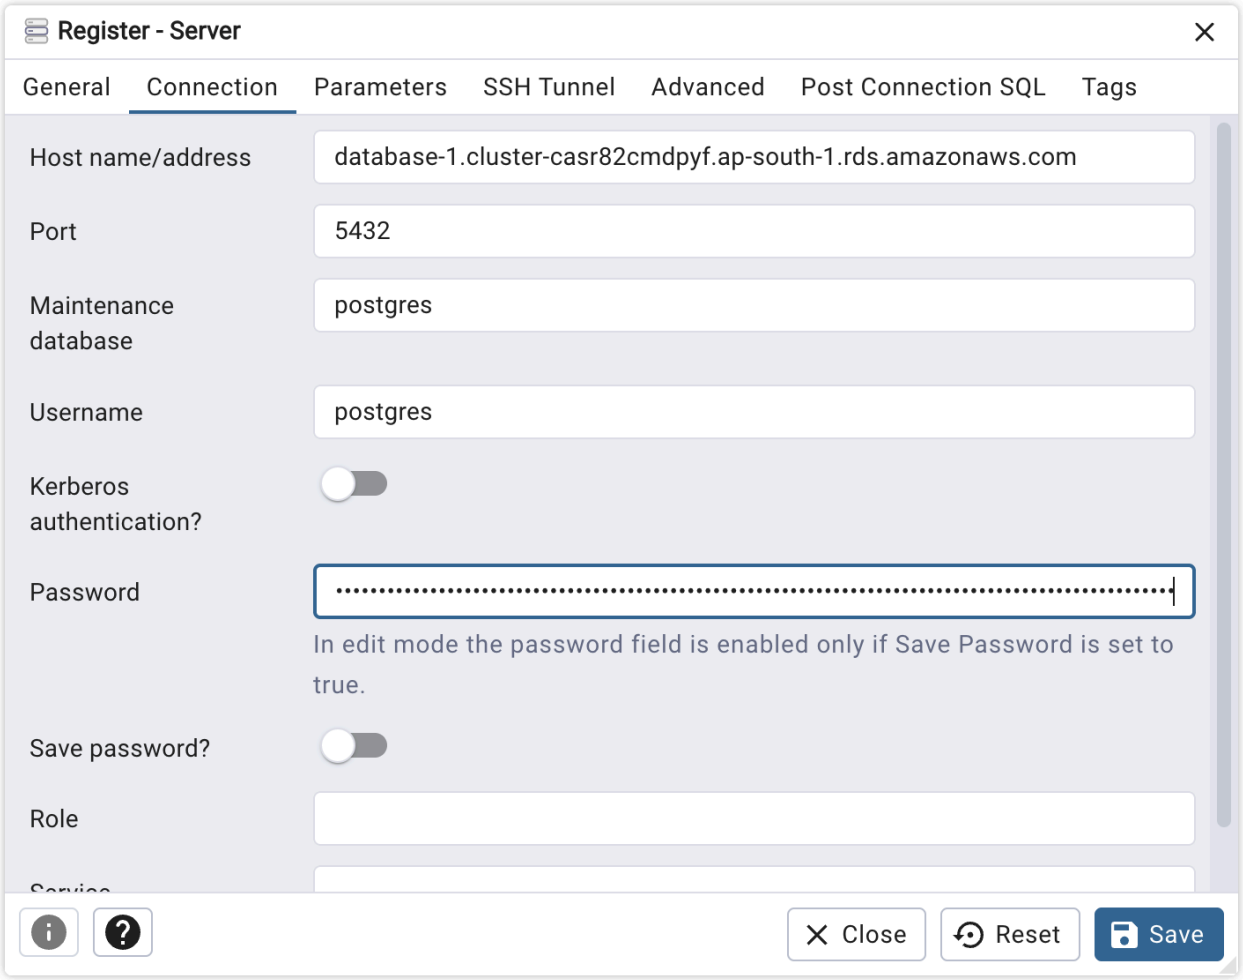

The connection panel displays: internet access gateway status (Enabled), IAM Authentication status (Enabled), and IAM authentication token option. Select your programming language from the dropdown and follow the connection steps to paste the code and run the commands.

Restoring a cluster created through express configuration

The restore process for express configuration clusters follows the same workflow as standard clusters. You can restore from a manual snapshot using the restore-db-cluster-from-snapshot operation or restore to a specific point in time using the restore-db-cluster-to-point-in-time operation. You can restore a cluster with express configuration to either a cluster with full configuration or a cluster with express configuration. If you want to restore to a cluster with express configuration, both restore operations require two additional parameters—VPCNetworkingEnabled must be set to false and InternetAccessGatewayEnabled must be set to true. If you're restoring a regular cluster that used master username and password authentication

to an express configuration cluster, you'll need to modify the restored DB cluster to update MasterUserAuthenticationType to iam-db-auth.

Limitations

The following limitations apply to clusters created with express configuration and the internet access gateway that is enabled by default.

- You can use express configuration only with Aurora PostgreSQL.
- Cluster created with express configuration are encrypted with Amazon/RDS service managed key. You cannot use a custom Amazon KMS key to encrypt the database.
- You cannot associate express clusters with an Amazon Virtual Private Cloud (VPC). When connecting from a machine that is inside a VPC to the database with the express cluster with internet access gateway enabled, ensure that the machine allows inbound and outbound traffic from the internet.
- You cannot disable the internet access gateway for clusters created with express configuration.
- You can only use RDS IAM authentication with the internet access gateway. See, IAM database authentication for list of limitations and recommendation. Features related to other forms of authentication such as managed credentials in Amazon Secrets Manager, and Kerberos authentication cannot be used with clusters that have internet access gateway enabled. You also cannot disable IAM authentication.

  > **Warning**
  >
  > If you disable the `rds_iam` role for the master username, you will lose access to new connections to the database. You can restore access by modifying the cluster and setting the `--master-user-authentication-type` to `iam-db-auth`. See, modify-db-cluster.

- You cannot select a specific engine version with express configuration. Engine version can be upgraded but not downgraded.
- Clusters with express configuration only support creating an Aurora serverless instance. You can modify the instance type or add instances after the database is created.
- Clusters with express configuration only support the default parameter group. The parameter group can be updated after the database is created.
- The following features are not supported with clusters created with express configuration as they are not associated with a VPC.

  - Aurora limitless database
  - Aurora global database
  - RDS Proxy
  - Aurora Zero-ETL integration
  - RDS Query Editor
  - Blue/Green Deployments
  - Database Activity Streams
  - Zero Downtime Patching
  - Babelfish
- Data API can be enabled for a cluster with express configuration after creation using the EnableHttpEndpoint operation. However, it doesn't support authentication with master username/password. You must create new user credentials to access Data API.
- Database Insights Advanced mode can be enabled on a cluster with express configuration after creation using the ModifyDBCluster operation.
- Clusters with express configuration support IPv4 addresses only. IPv6 is not supported.
- Clusters with express configuration does not support changing all settings at the time of create operations. For example, you can only choose Aurora Standard storage when creating with express configuration. You can change the storage type after the cluster is created. See, Express configuration settings for a list of all other settings and default values that apply with express configuration.
- Clusters created through express configuration with internet access gateway enabled do not support configurable cipher suites. Although Amazon RDS for PostgreSQL allows you to configure the ssl_ciphers parameter to restrict allowed SSL cipher suites, this parameter is ignored on clusters with internet access gateway enabled, which use the default cipher suite configuration instead.

Tutorial: Create a web server and an Amazon Aurora DB cluster

This tutorial shows you how to install an Apache web server with PHP and create a MariaDB, MySQL, or PostgreSQL database. The web server runs on an Amazon EC2 instance using Amazon Linux 2023, and you can choose between an Aurora MySQL or Aurora PostgreSQL DB cluster. Both the Amazon EC2 instance and the DB cluster run in a virtual private cloud (VPC) based on the Amazon VPC service.

Important

There's no charge for creating an Amazon account. However, by completing this tutorial, you might incur costs for the Amazon resources you use. You can delete these resources after you complete the tutorial if they are no longer needed.


Note

This tutorial works with Amazon Linux 2023 and might not work for other versions of Linux.

In the tutorial that follows, you create an EC2 instance that uses the default VPC, subnets, and security group for your Amazon Web Services account. This tutorial shows you how to create the DB cluster and automatically set up connectivity with the EC2 instance that you created. The tutorial then shows you how to install the web server on the EC2 instance. You connect your web server to your DB cluster in the VPC using the DB cluster writer endpoint.

1. Launch an EC2 instance to connect with your DB cluster
2. Create an Amazon Aurora DB cluster
3. Install a web server on your EC2 instance

The following diagram shows the configuration when the tutorial is complete.

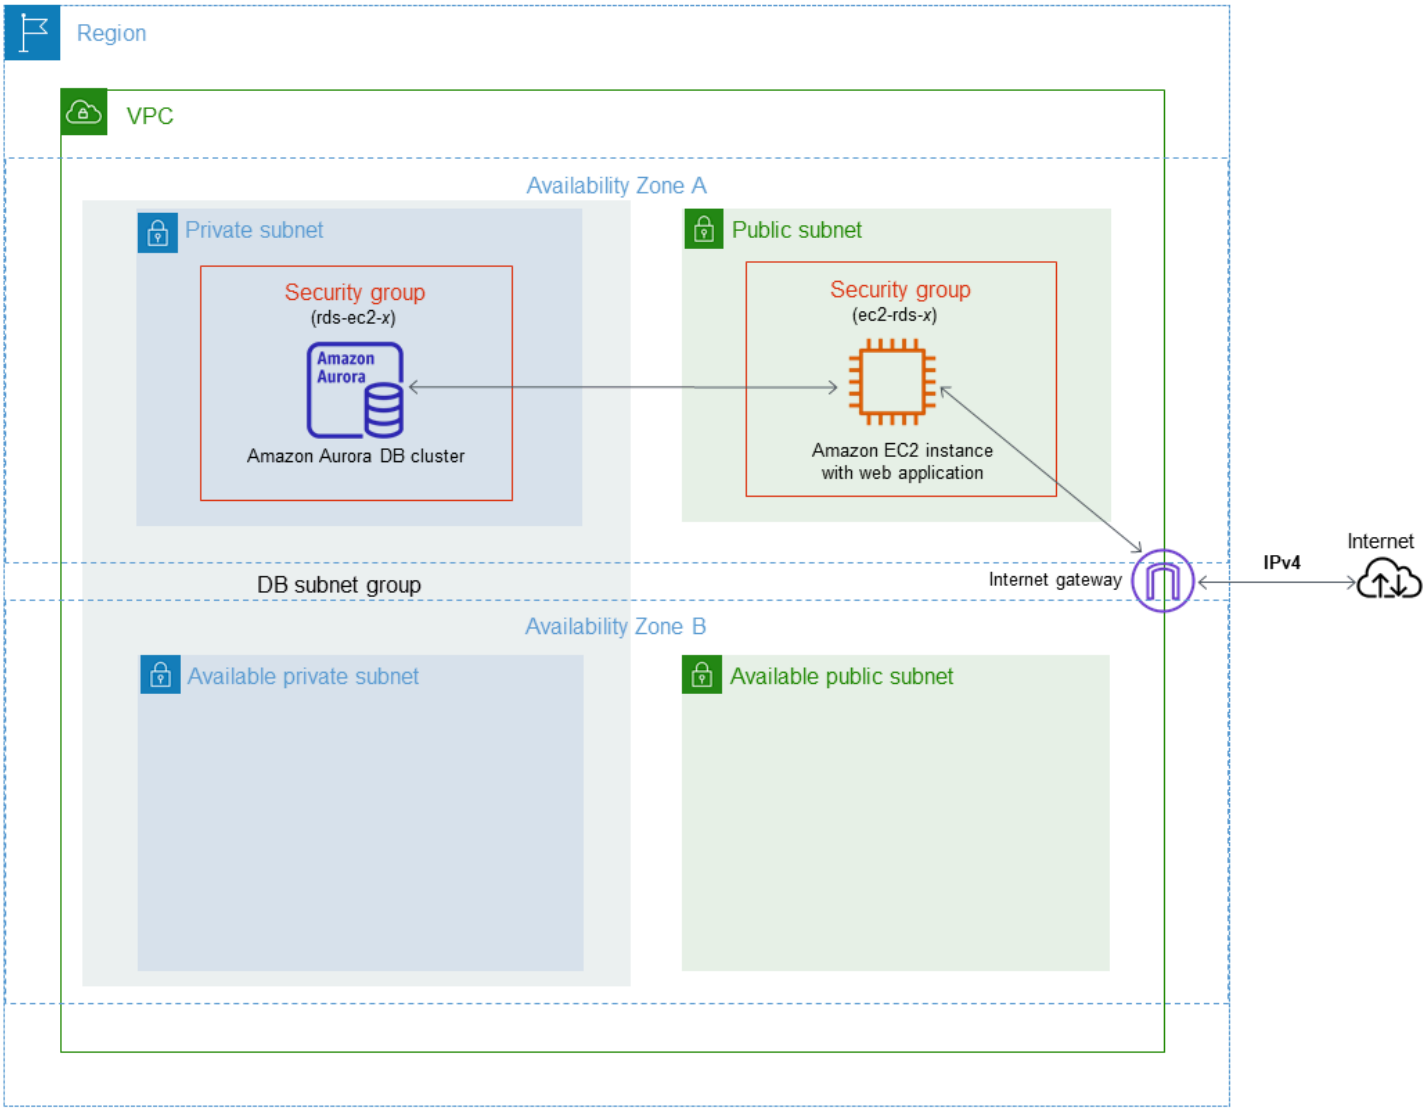

Note


After you complete the tutorial, there is a public and private subnet in each Availability Zone in your VPC. This tutorial uses the default VPC for your Amazon Web Services account and automatically sets up connectivity between your EC2 instance and DB cluster. If you would rather configure a new VPC for this scenario instead, complete the tasks in Tutorial: Create a VPC for use with a DB cluster (IPv4 only).

Launch an EC2 instance to connect with your DB cluster

Create an Amazon EC2 instance in the public subnet of your VPC.

To launch an EC2 instance


1. Sign in to the Amazon Web Services Management Console and open the Amazon EC2 console at https://console.amazonaws.cn/ec2/.
2. In the Amazon Web Services Management Console, choose the Amazon Web Services Region where you want to create the EC2 instance.
3. Choose **EC2 Dashboard**, and then choose **Launch instance**, as shown following.

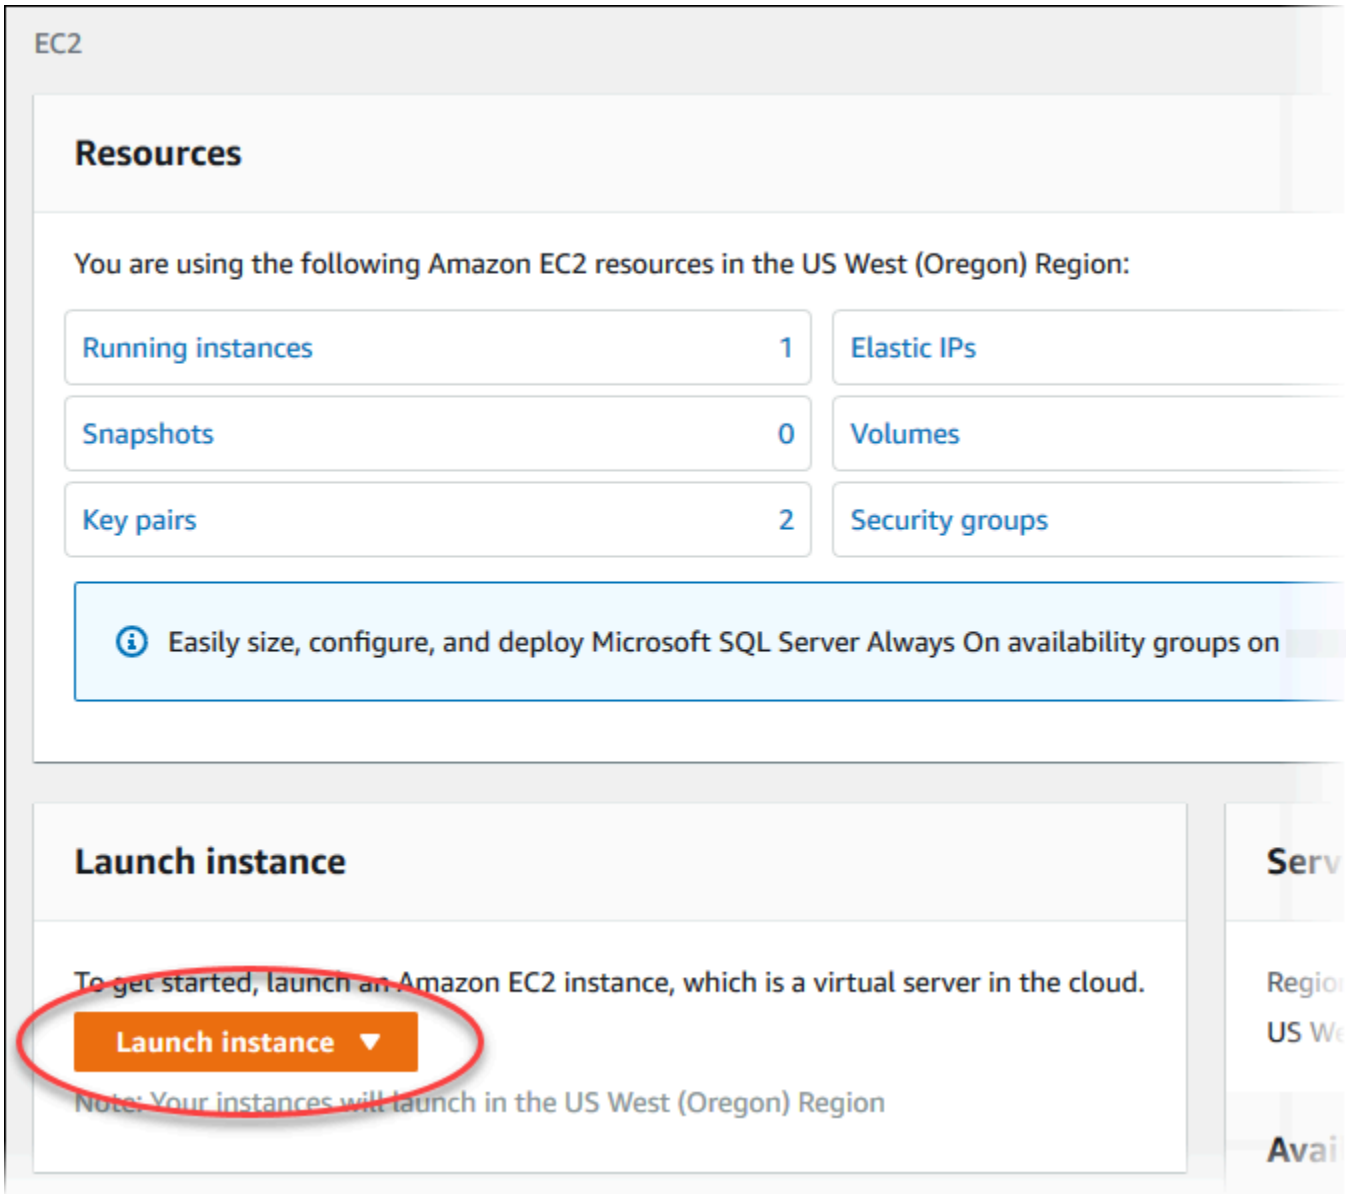

4. Choose the following settings in the **Launch an instance** page.

   a. Under **Name and tags**, for **Name**, enter **`tutorial-ec2-instance-web-server`**.

b. Under **Application and OS Images (Amazon Machine Image)**, choose **Amazon Linux**, and then choose the **Amazon Linux 2023 AMI**. Keep the defaults for the other choices.

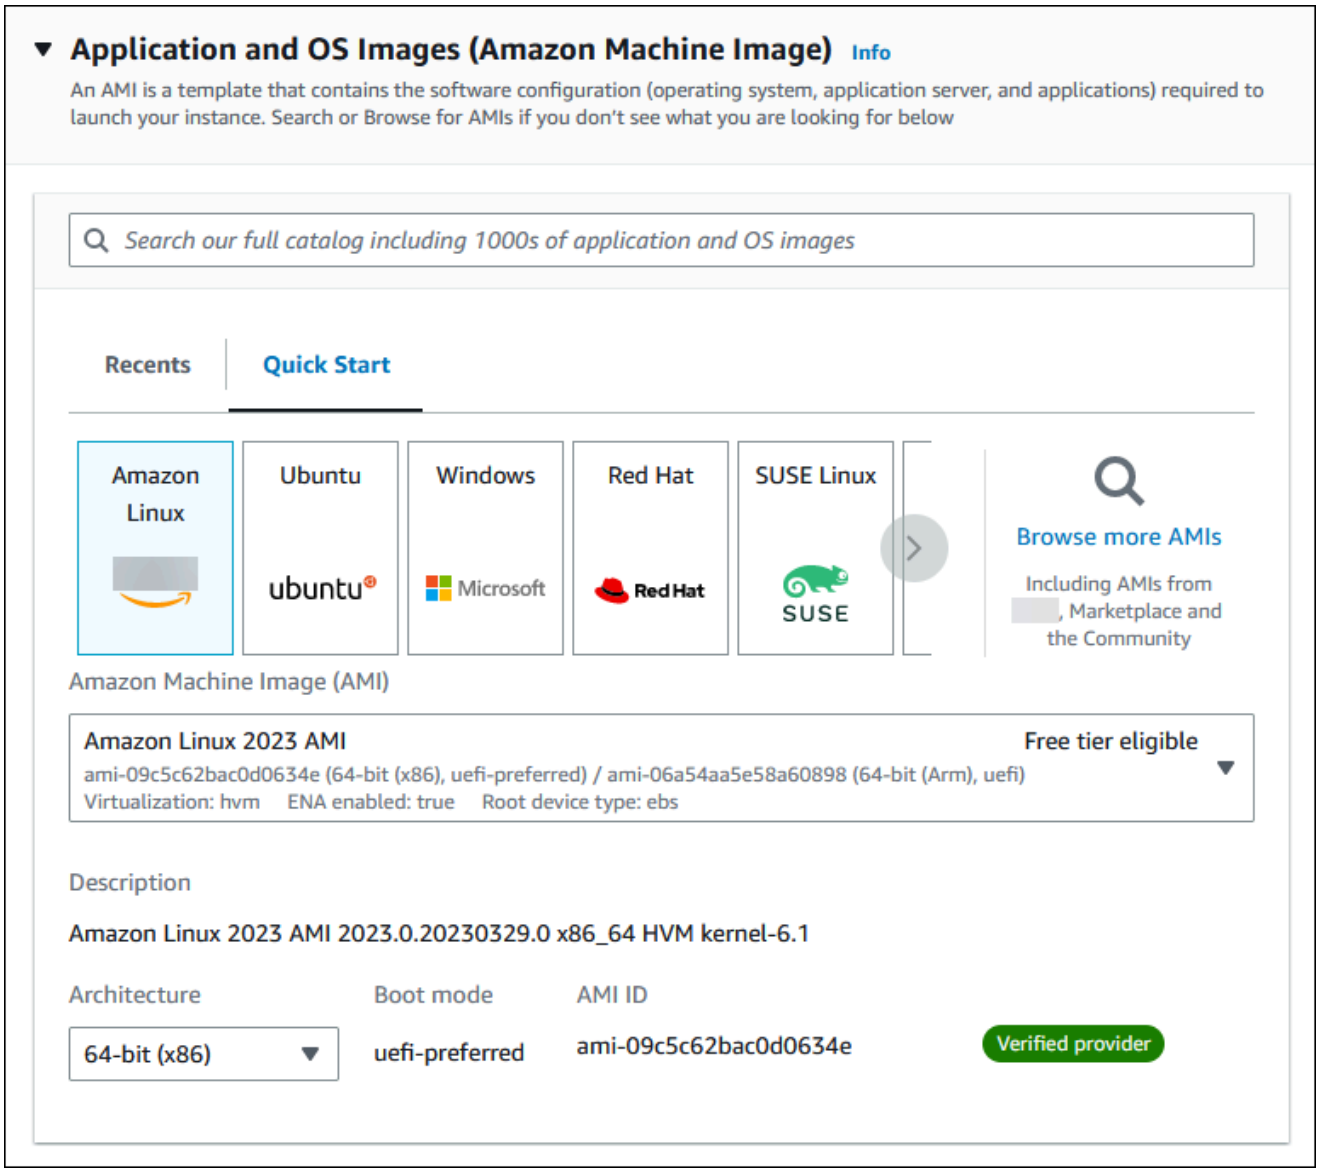

c. Under **Instance type**, choose **t2.micro**.

d. Under **Key pair (login)**, choose a **Key pair name** to use an existing key pair. To create a new key pair for the Amazon EC2 instance, choose **Create new key pair** and then use the **Create key pair** window to create it.

   For more information about creating a new key pair, see Create a key pair in the *Amazon EC2 User Guide*.

e. Under **Network settings**, set these values and keep the other values as their defaults:

   - For **Allow SSH traffic from**, choose the source of SSH connections to the EC2 instance.


You can choose **My IP** if the displayed IP address is correct for SSH connections.

Otherwise, you can determine the IP address to use to connect to EC2 instances in your VPC using Secure Shell (SSH). To determine your public IP address, in a different browser window or tab, you can use the service at https://checkip.amazonaws.com. An example of an IP address is `203.0.113.25/32`.

In many cases, you might connect through an internet service provider (ISP) or from behind your firewall without a static IP address. If so, make sure to determine the range of IP addresses used by client computers.

> **Warning**
>
> If you use `0.0.0.0/0` for SSH access, you make it possible for all IP addresses to access your public instances using SSH. This approach is acceptable for a short time in a test environment, but it's unsafe for production environments. In production, authorize only a specific IP address or range of addresses to access your instances using SSH.


- Turn on **Allow HTTPs traffic from the internet**.
- Turn on **Allow HTTP traffic from the internet**.

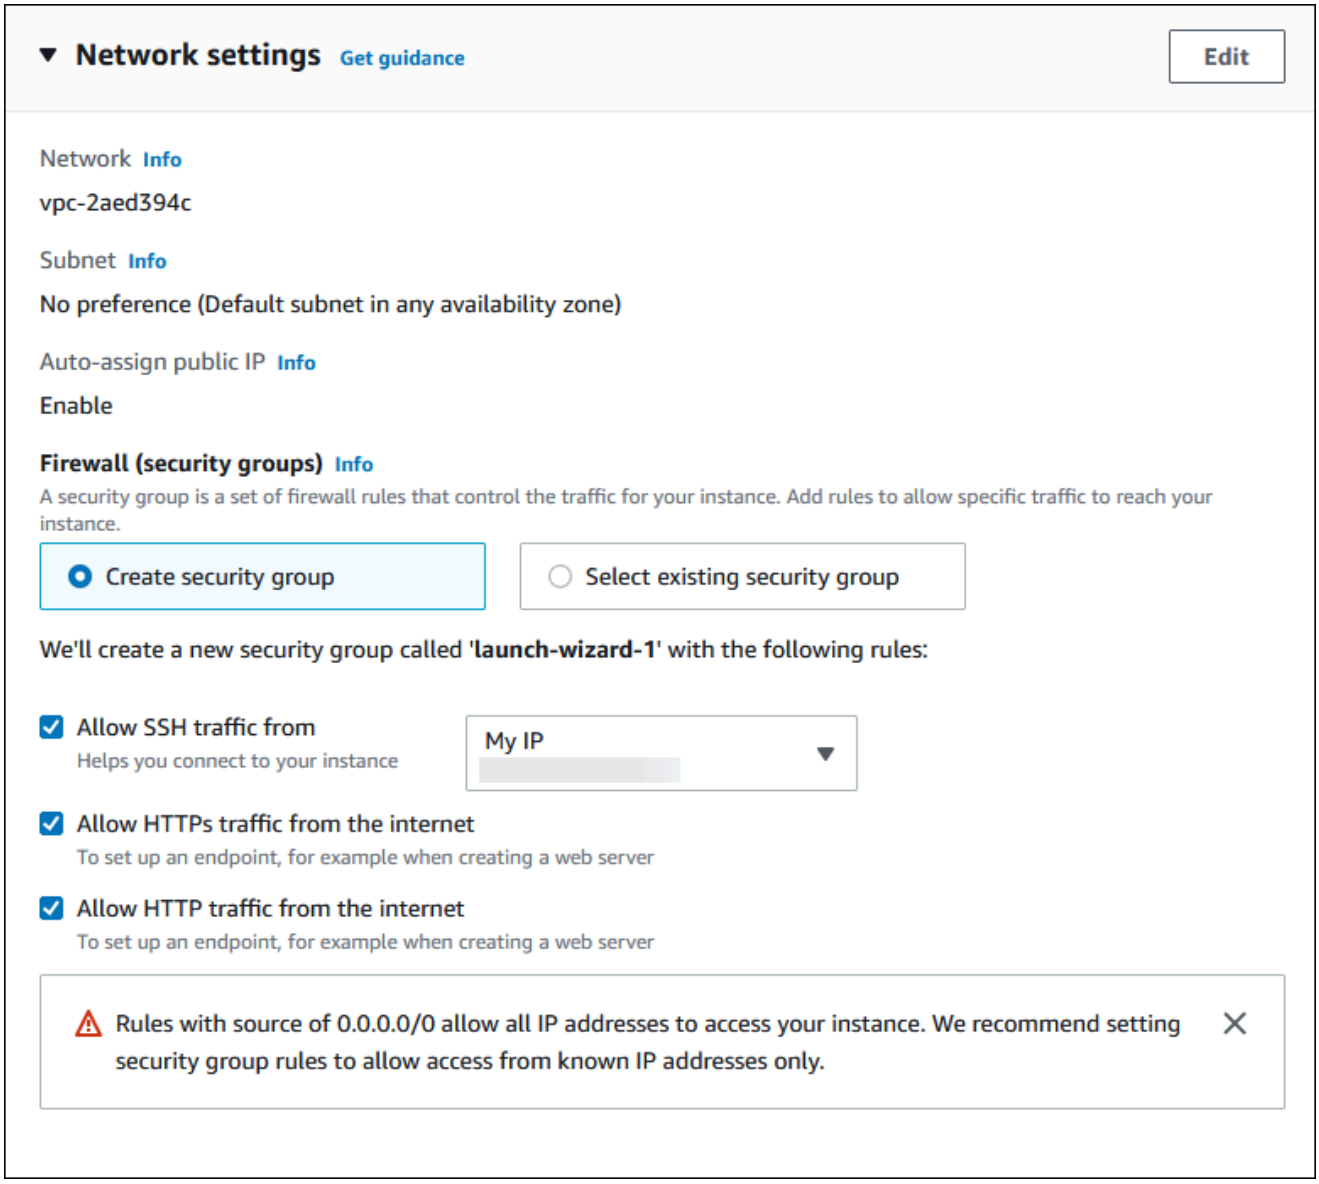


f. Leave the default values for the remaining sections.

g. Review a summary of your instance configuration in the **Summary** panel, and when you're ready, choose **Launch instance**.


5. On the **Launch Status** page, note the identifier for your new EC2 instance, for example: `i-1234567890abcdef0`.

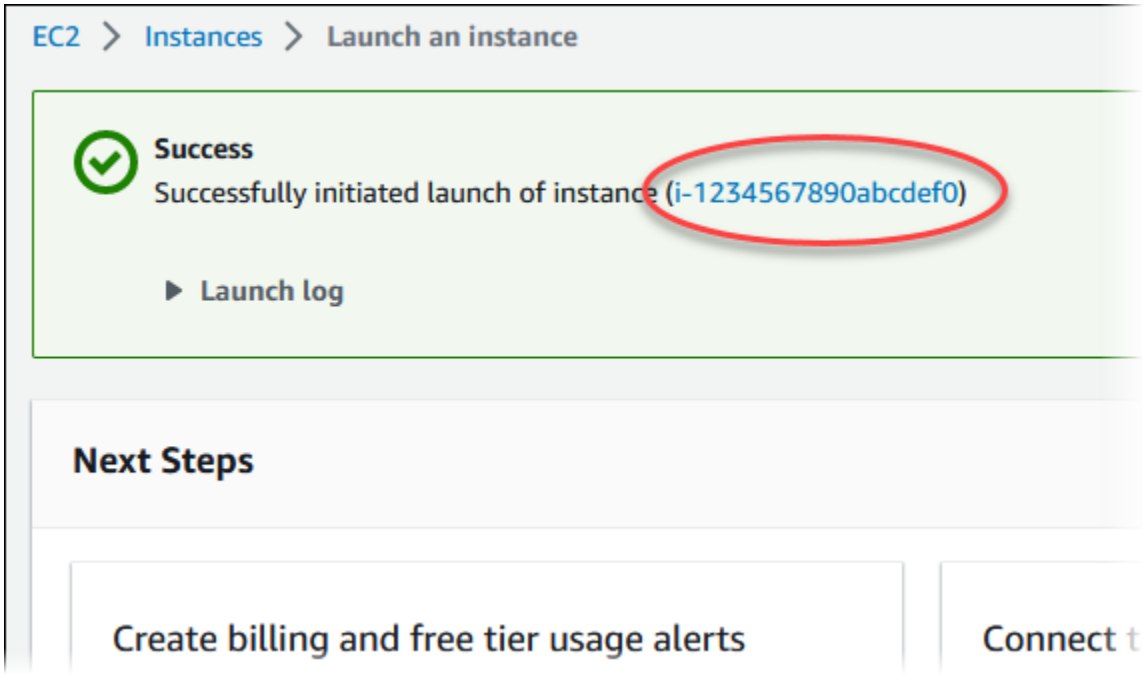

6. Choose the EC2 instance identifier to open the list of EC2 instances, and then select your EC2 instance.
7. In the **Details** tab, note the following values, which you need when you connect using SSH:
   a. In **Instance summary**, note the value for **Public IPv4 DNS**.

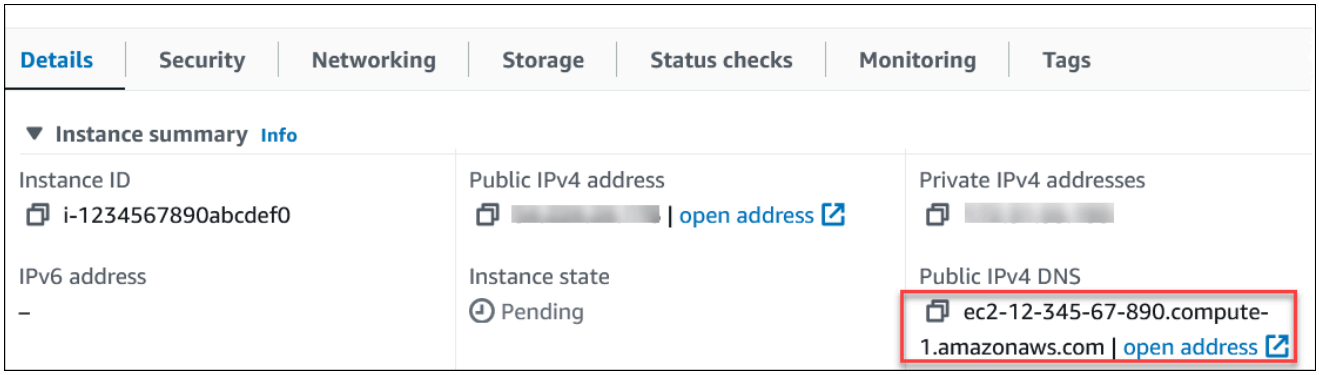

   b. In **Instance details**, note the value for **Key pair name**.

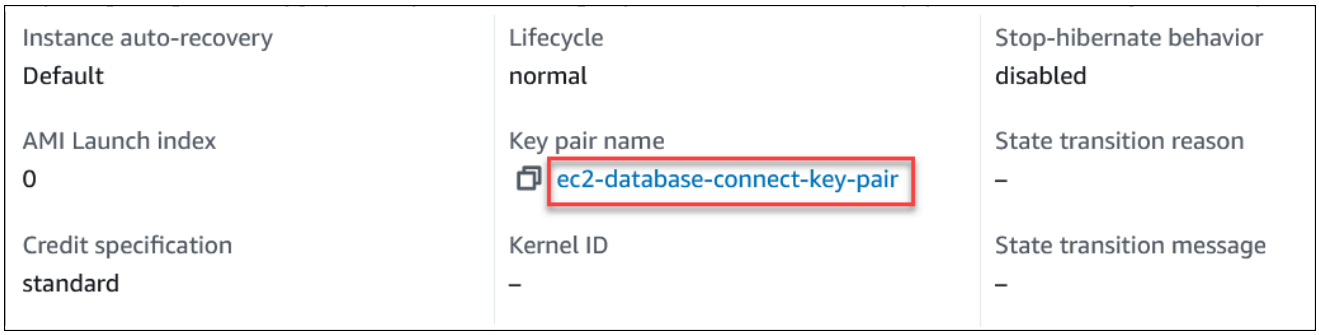

8. Wait until **Instance state** for your instance is **Running** before continuing.
9. Complete Create an Amazon Aurora DB cluster.


Create an Amazon Aurora DB cluster

Create an Amazon Aurora MySQL or Aurora PostgreSQL DB cluster that maintains the data used by a web application.

Aurora MySQL


To create an Aurora MySQL DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the Amazon Web Services Management Console, make sure the Amazon Web Services Region is the same as the one where you created your EC2 instance.
3. In the navigation pane, choose **Databases**.
4. Choose **Create database**.
5. On the **Create database** page, choose **Standard create**.
6. For **Engine options**, choose **Aurora (MySQL Compatible)**.

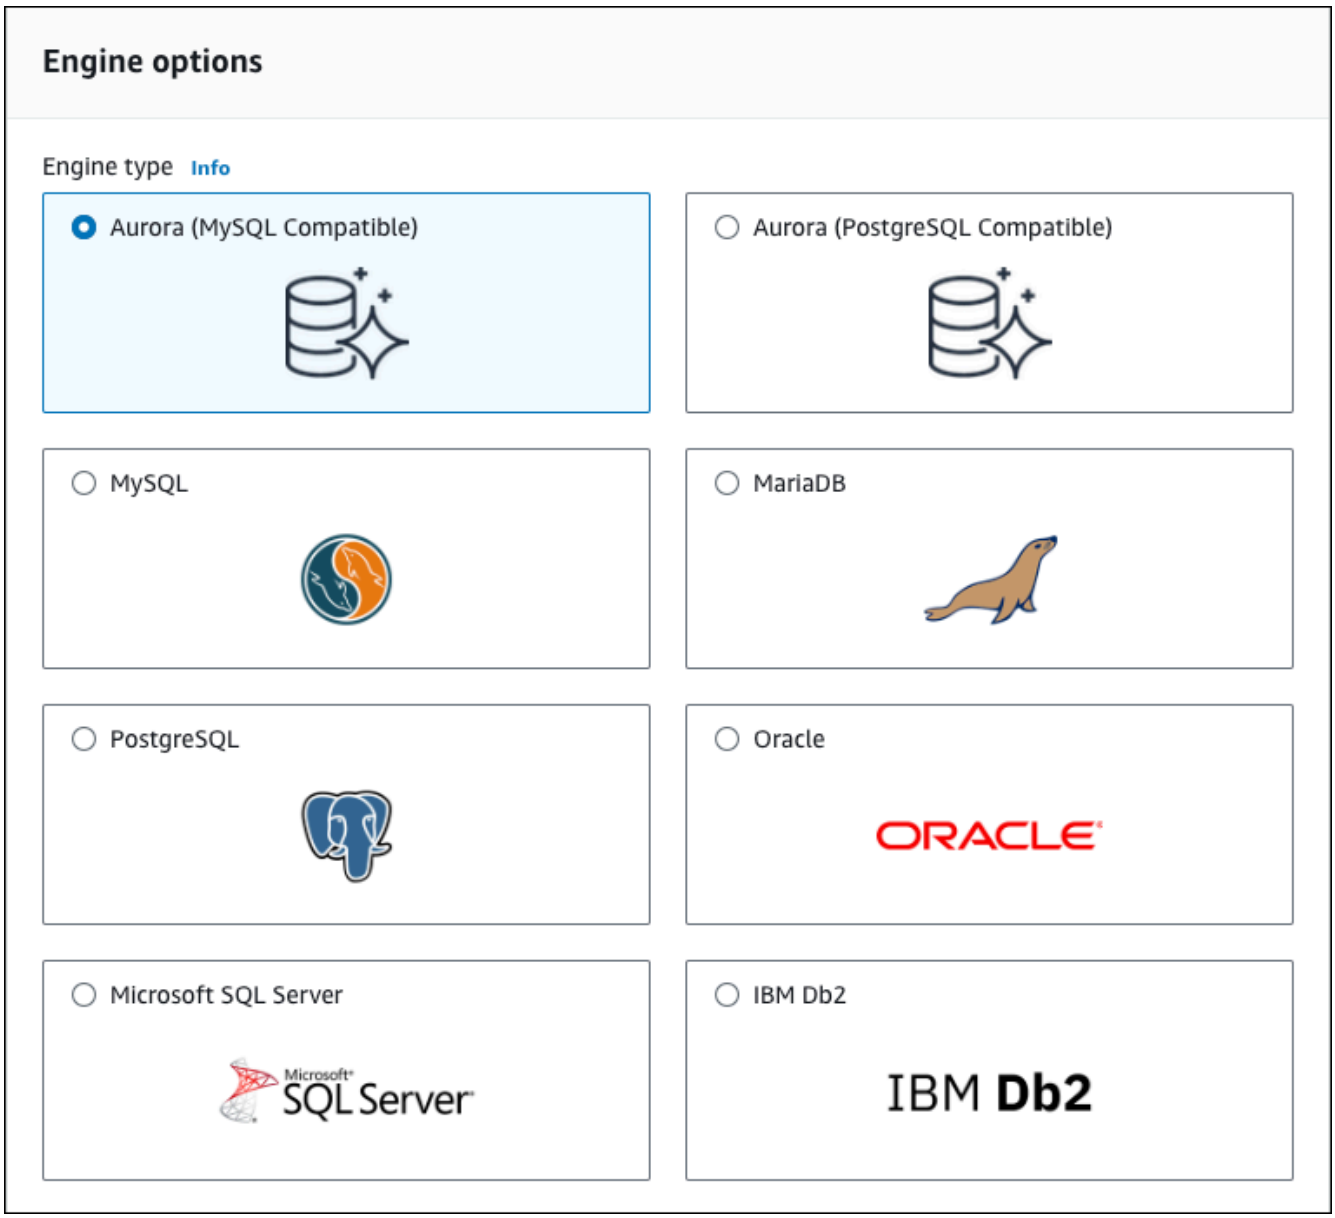


Keep the default values for **Version** and the other engine options.

7. In the **Templates** section, choose **Dev/Test**.

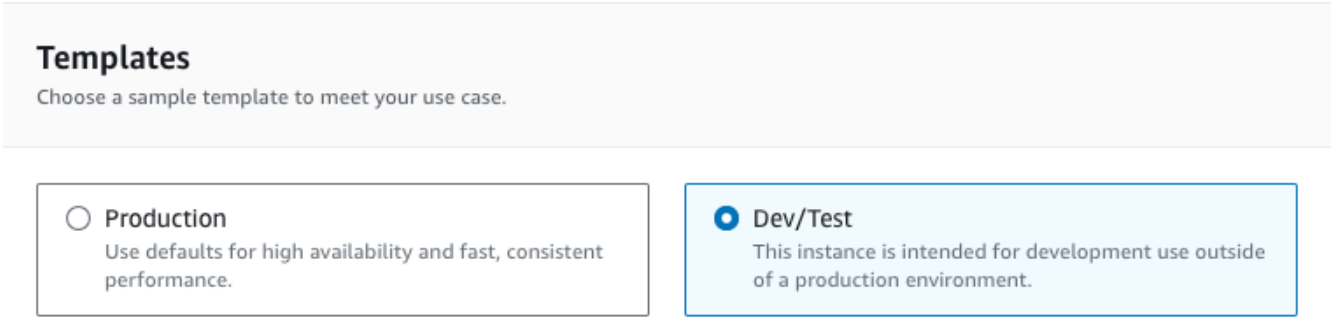

8. In the **Settings** section, set these values:


   - **DB cluster identifier** – Type **`tutorial-db-cluster`**.
   - **Master username** – Type **`tutorial_user`**.
   - **Auto generate a password** – Leave the option turned off.
   - **Master password** – Type a password.
   - **Confirm password** – Retype the password.

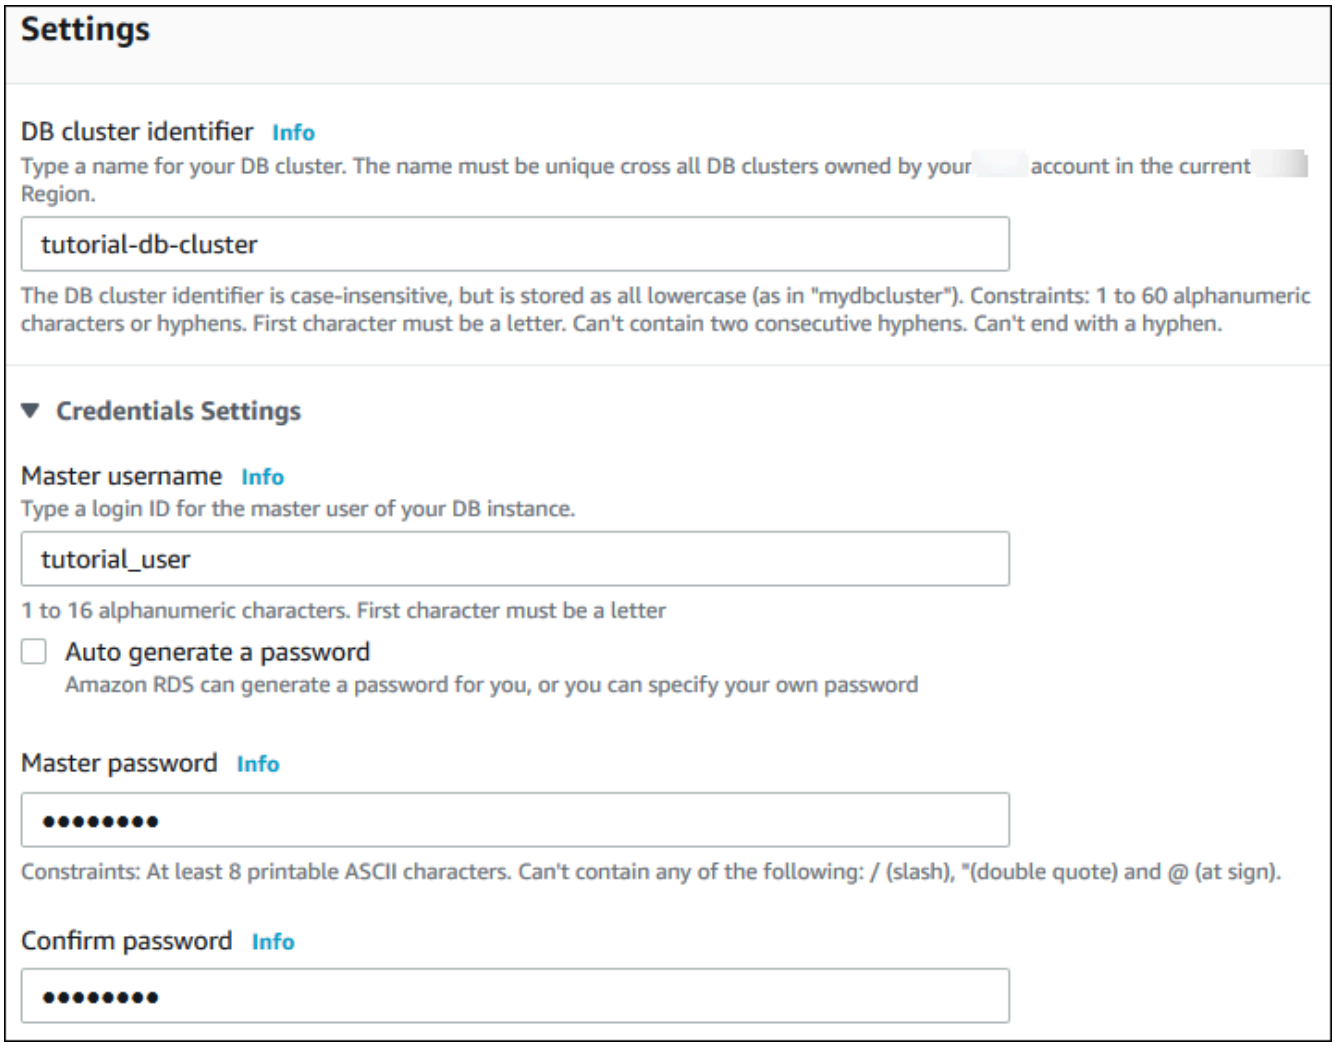


9. In the **Instance configuration** section, set these values:

   - **Burstable classes (includes t classes)**
   - **db.t3.small** or **db.t3.medium**

> **Note**
>
> We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see DB instance class types.

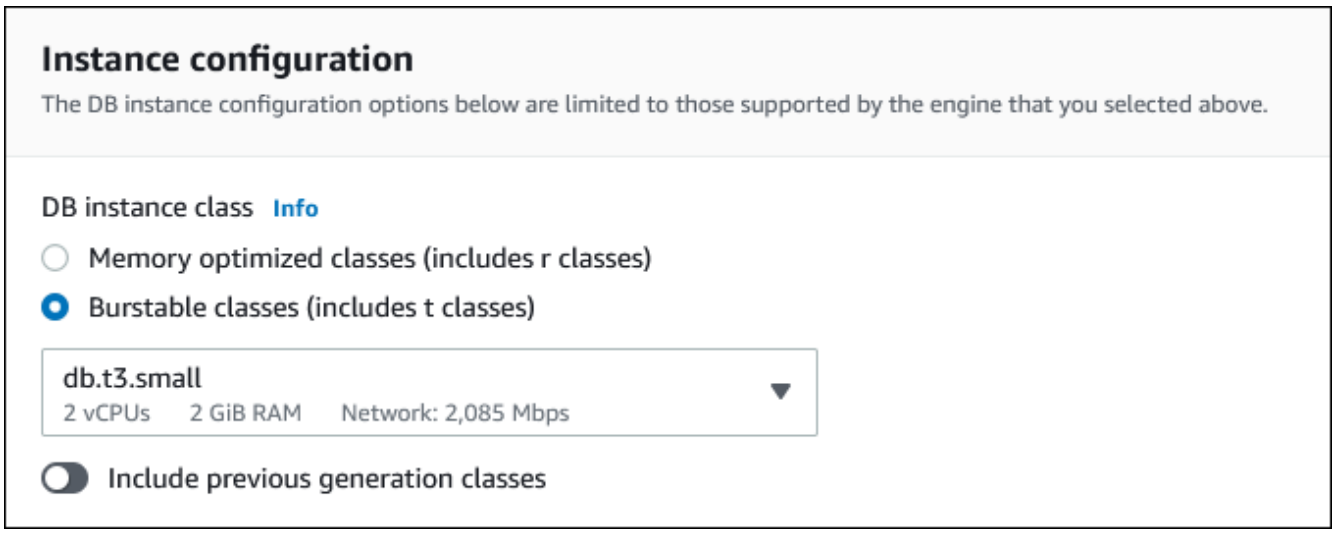


10. In the **Availability and durability** section, use the default values.
11. In the **Connectivity** section, set these values and keep the other values as their defaults:
    - For **Compute resource**, choose **Connect to an EC2 compute resource**.
    - For **EC2 instance**, choose the EC2 instance you created previously, such as **tutorial-ec2-instance-web-server**.

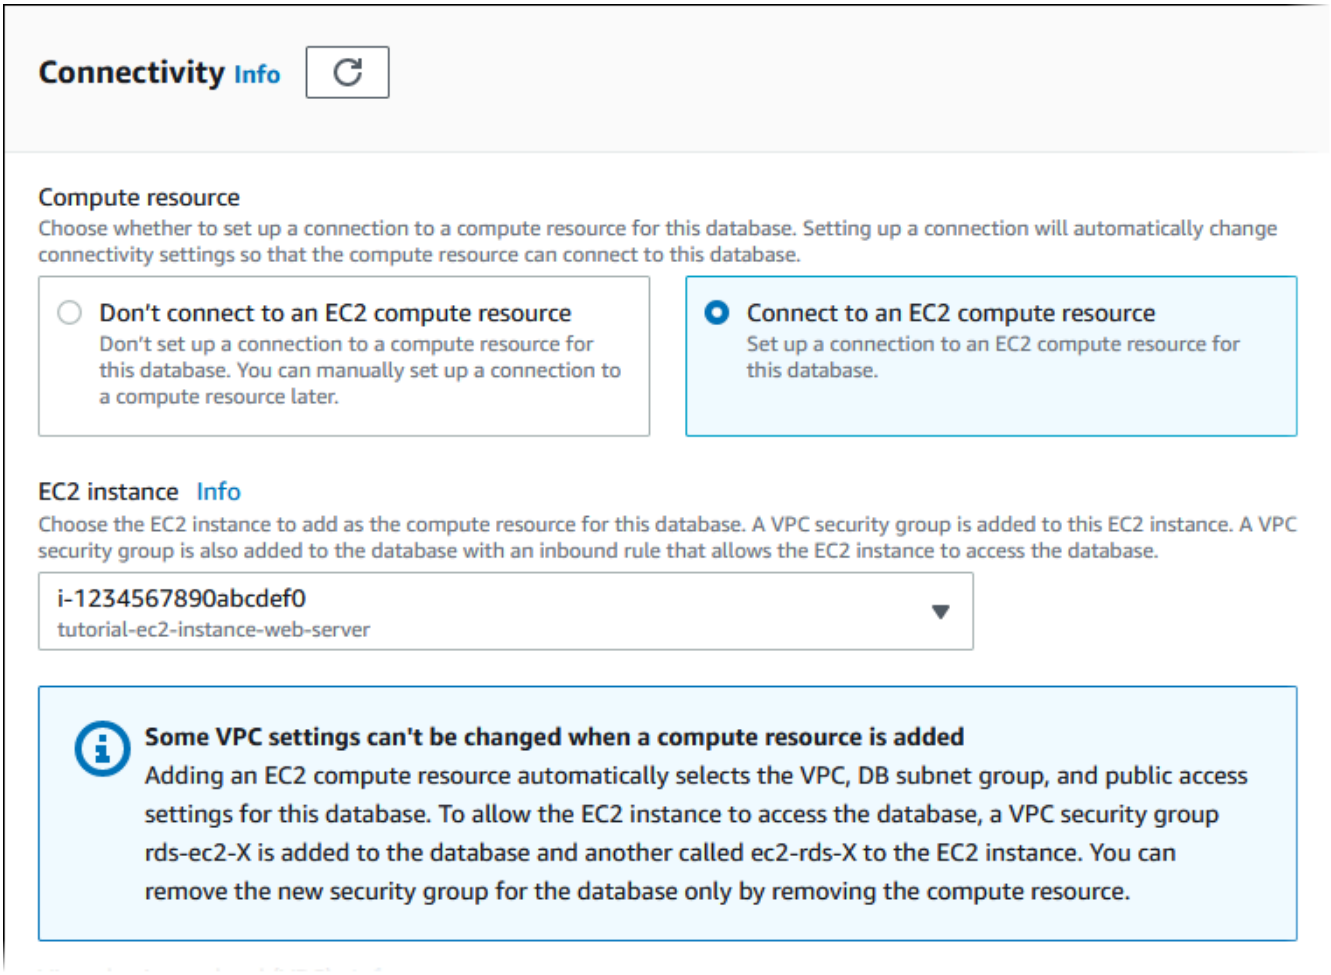

12. Open the **Additional configuration** section, and enter **`sample`** for **Initial database name**. Keep the default settings for the other options.
13. To create your Aurora MySQL DB cluster, choose **Create database**.

    Your new DB cluster appears in the **Databases** list with the status **Creating**.
14. Wait for the **Status** of your new DB cluster to show as **Available**. Then choose the DB cluster name to show its details.
15. In the **Connectivity & security** section, view the **Endpoint** and **Port** of the writer DB instance.

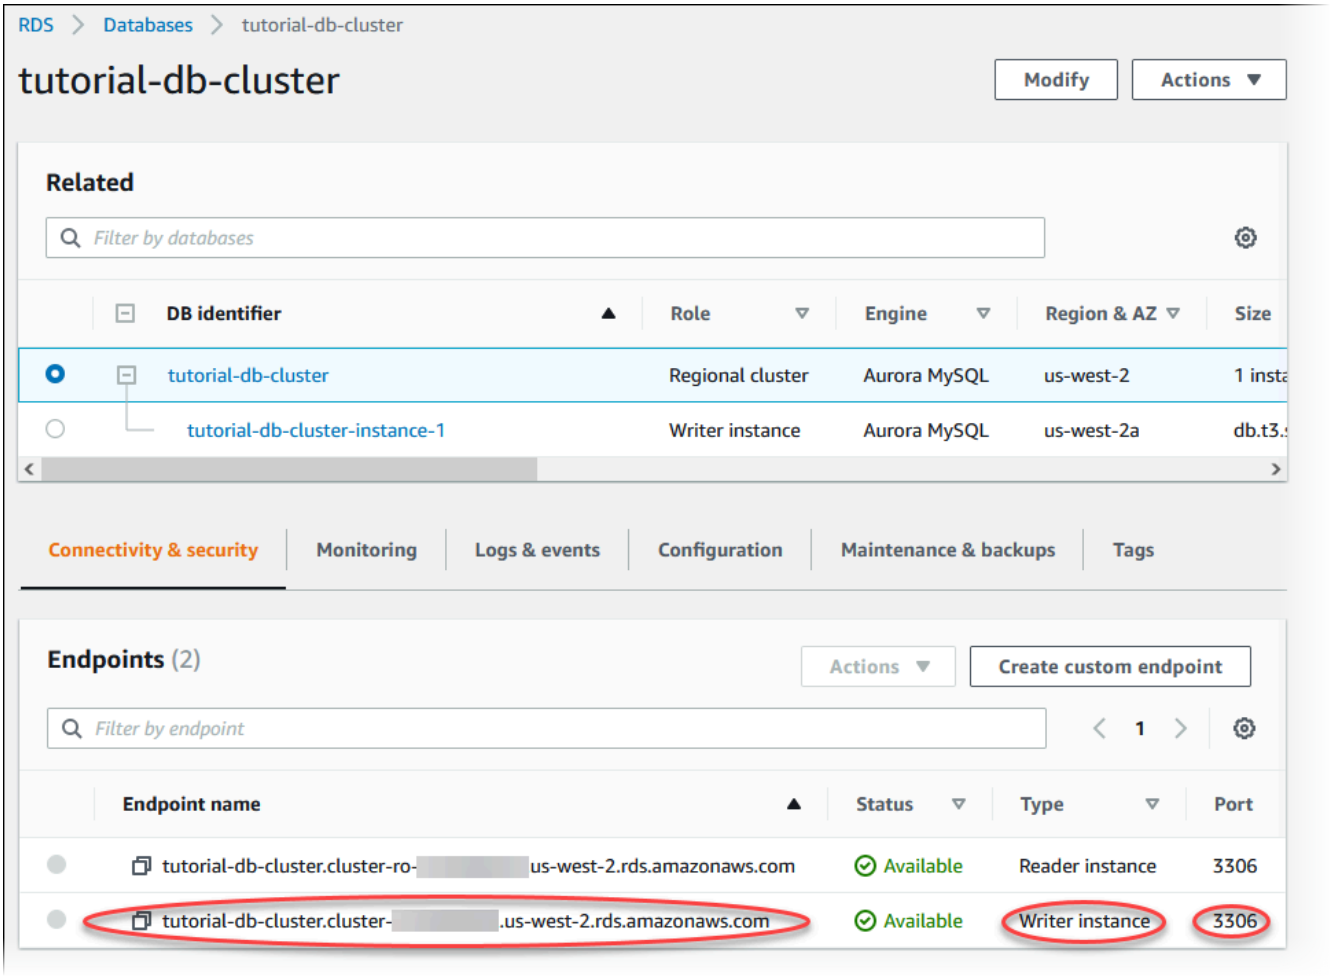

Note the endpoint and port for your writer DB instance. You use this information to connect your web server to your DB cluster.


16. Complete Install a web server on your EC2 instance.

Aurora PostgreSQL

To create an Aurora PostgreSQL DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the Amazon Web Services Management Console, make sure the Amazon Web Services Region is the same as the one where you created your EC2 instance.
3. In the navigation pane, choose **Databases**.
4. Choose **Create database**.

5. On the **Create database** page, choose **Standard create**.
6. For **Engine options**, choose **Aurora (PostgreSQL Compatible)**.

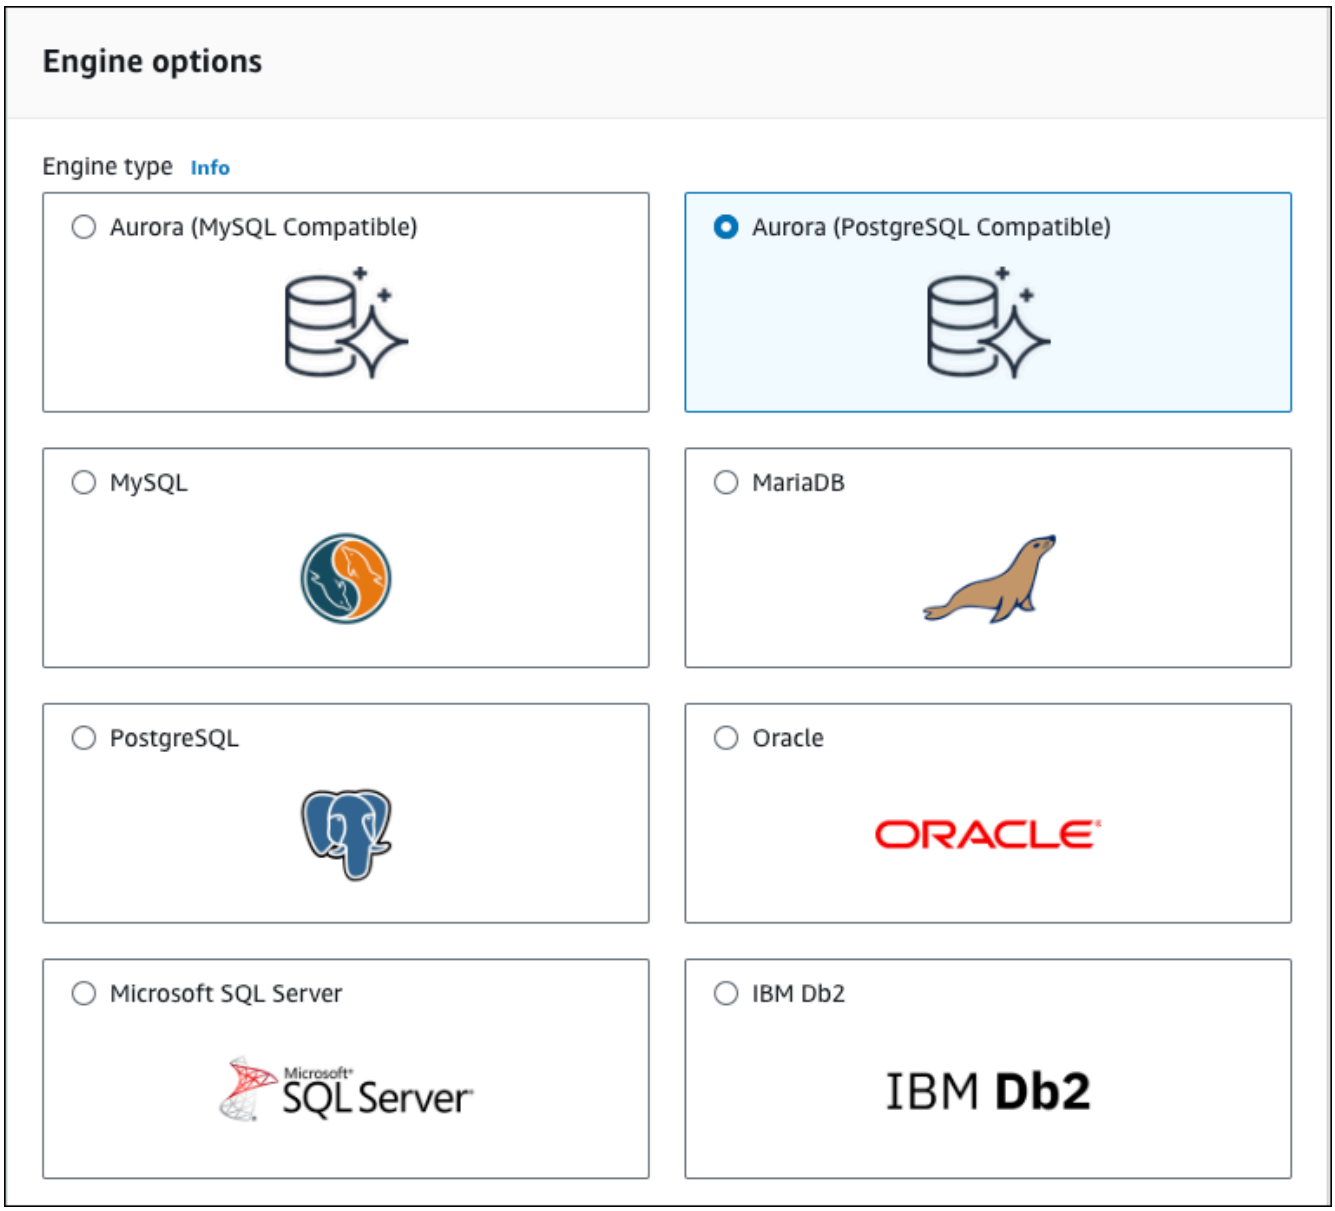


Keep the default values for **Version** and the other engine options.

7. In the **Templates** section, choose **Dev/Test**.



8. In the **Settings** section, set these values:


   - **DB cluster identifier** – Type **`tutorial-db-cluster`**.
   - **Master username** – Type **`tutorial_user`**.
   - **Auto generate a password** – Leave the option turned off.
   - **Master password** – Type a password.
   - **Confirm password** – Retype the password.

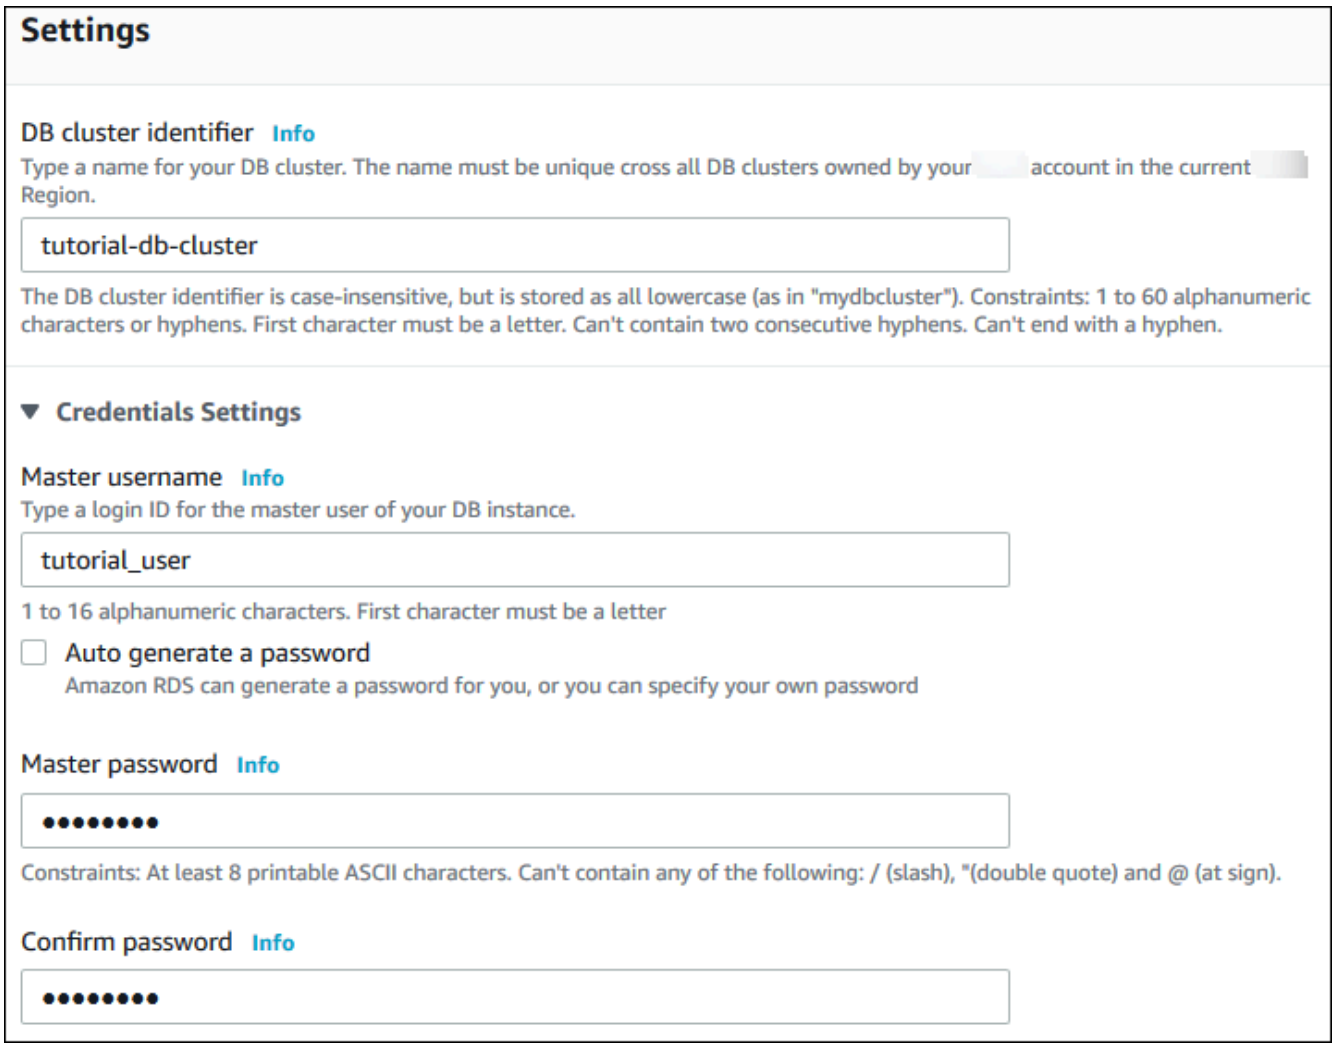


9. In the **Instance configuration** section, set these values:

   - **Burstable classes (includes t classes)**
   - **db.t3.small** or **db.t3.medium**

> **Note**
>
> We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see DB instance class types.

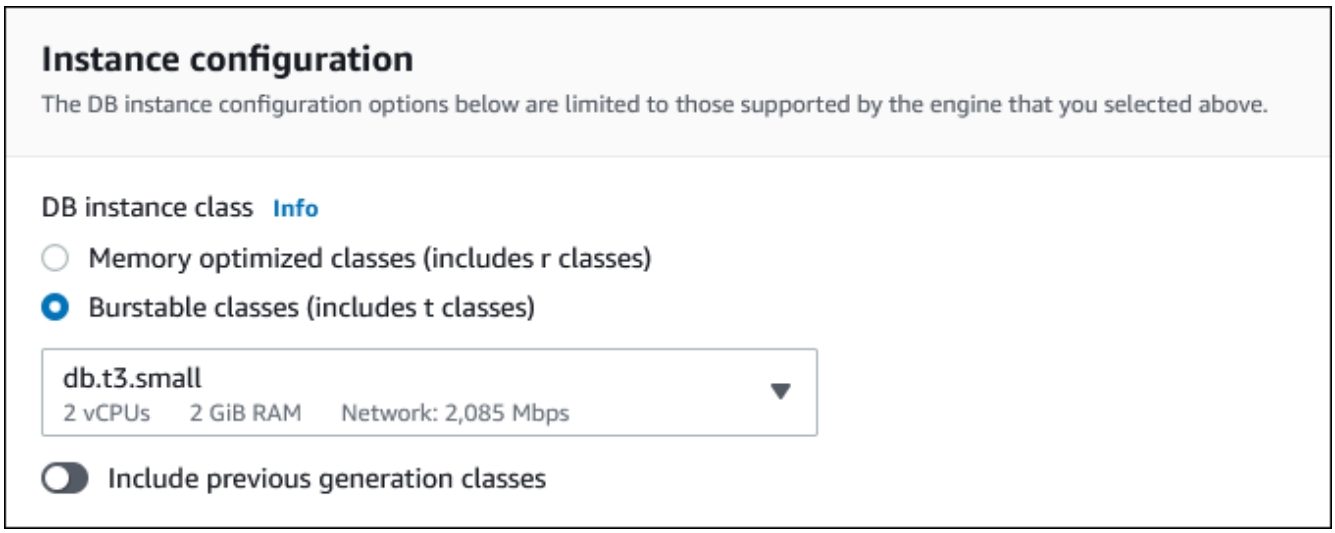


10. In the **Availability and durability** section, use the default values.
11. In the **Connectivity** section, set these values and keep the other values as their defaults:
    - For **Compute resource**, choose **Connect to an EC2 compute resource**.
    - For **EC2 instance**, choose the EC2 instance you created previously, such as **tutorial-ec2-instance-web-server**.

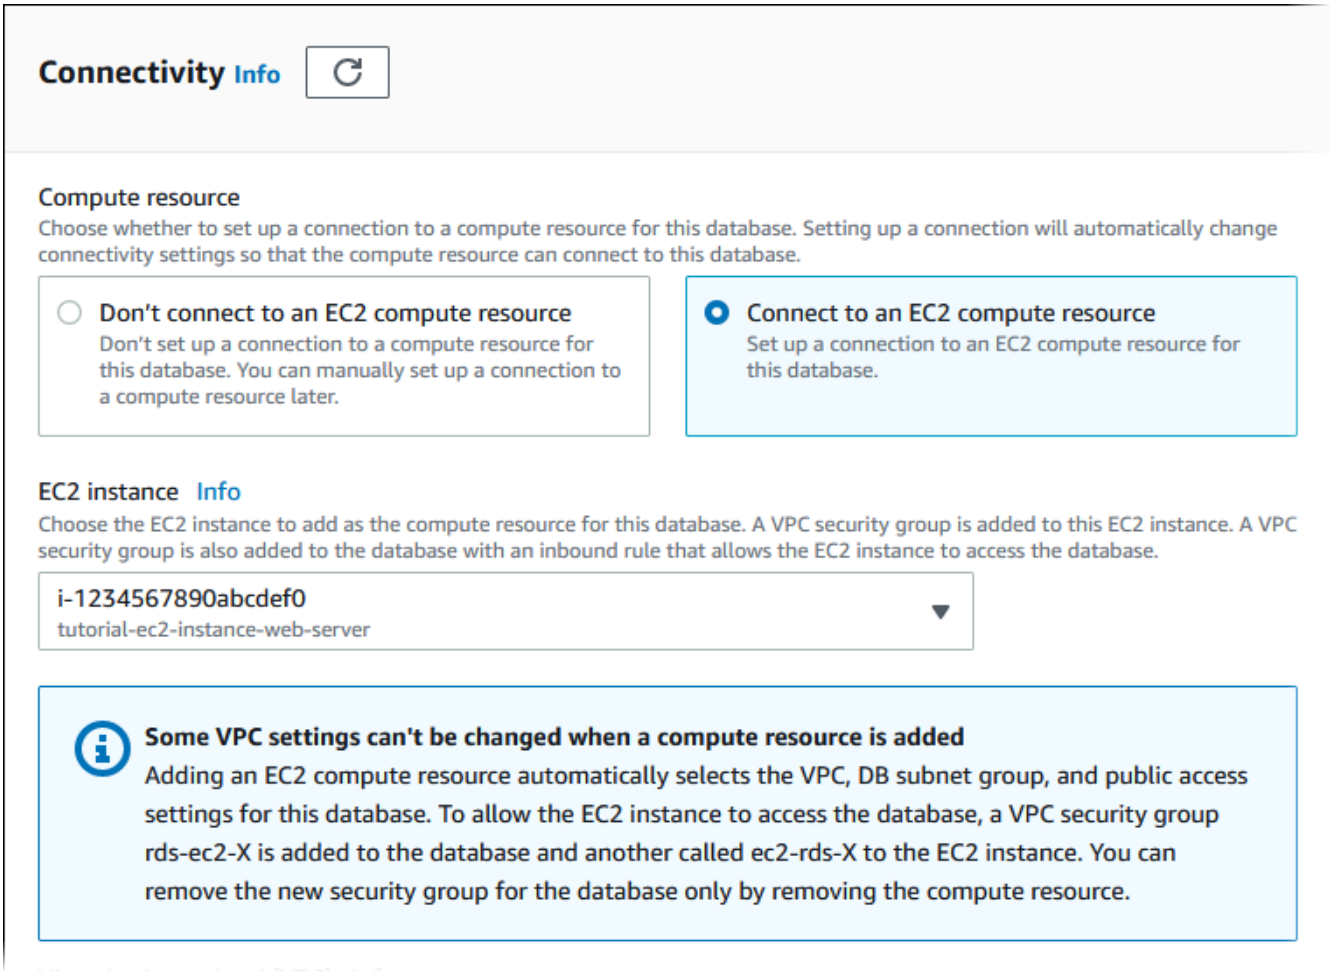

12. Open the **Additional configuration** section, and enter **`sample`** for **Initial database name**. Keep the default settings for the other options.
13. To create your Aurora PostgreSQL DB cluster, choose **Create database**.

    Your new DB cluster appears in the **Databases** list with the status **Creating**.
14. Wait for the **Status** of your new DB cluster to show as **Available**. Then choose the DB cluster name to show its details.
15. In the **Connectivity & security** section, view the **Endpoint** and **Port** of the writer DB instance.

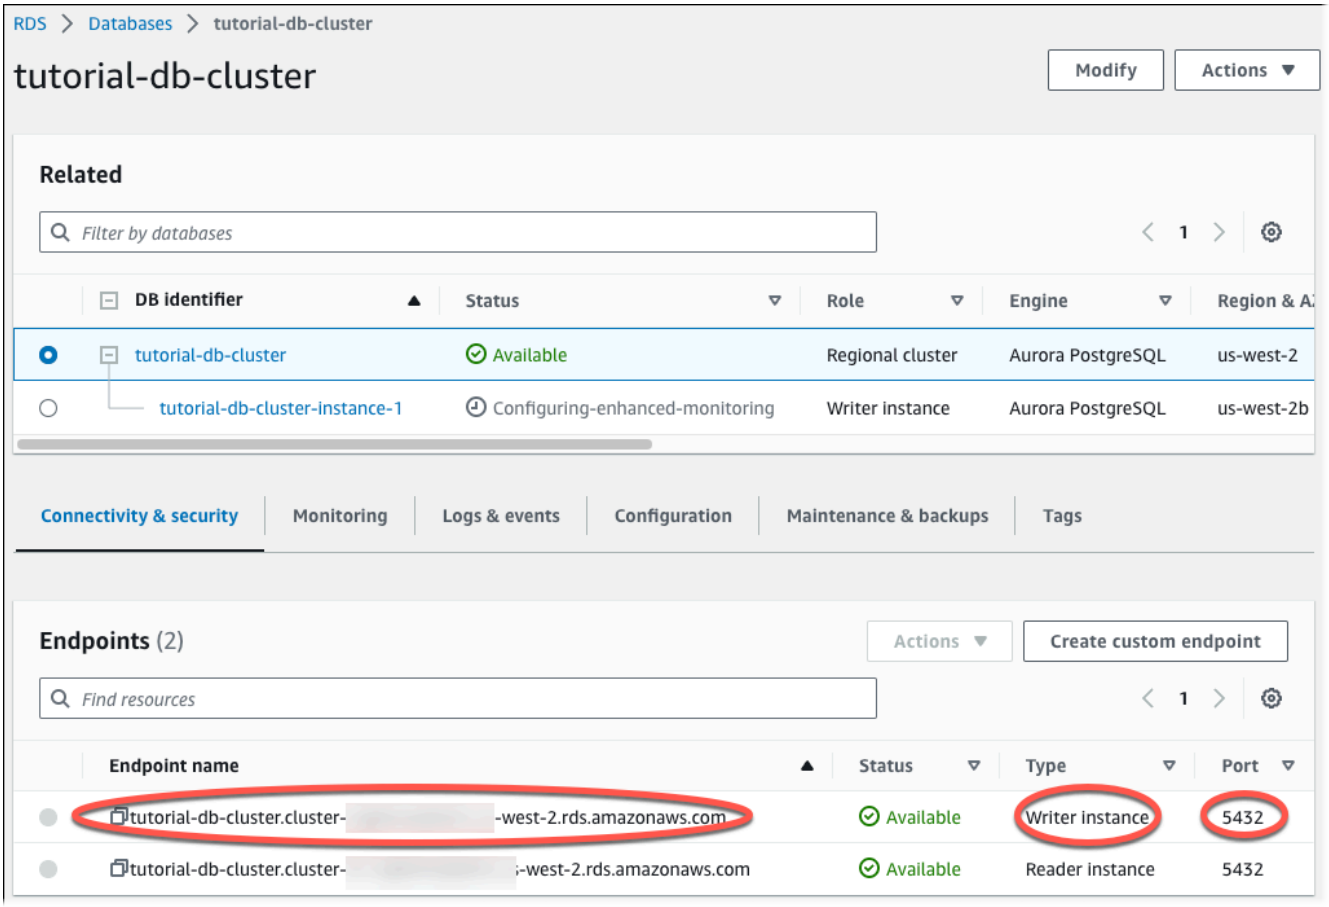

Note the endpoint and port for your writer DB instance. You use this information to connect your web server to your DB cluster.

16. Complete Install a web server on your EC2 instance.

Install a web server on your EC2 instance

Install a web server on the EC2 instance you created in Launch an EC2 instance to connect with your DB cluster. The web server connects to the Amazon Aurora DB cluster that you created in Create an Amazon Aurora DB cluster.

Install an Apache web server with PHP and MariaDB

Connect to your EC2 instance and install the web server.

To connect to your EC2 instance and install the Apache web server with PHP

1. Connect to the EC2 instance that you created earlier by following the steps in Connect to your Linux instance in the *Amazon EC2 User Guide*.

We recommend that you connect to your EC2 instance using SSH. If the SSH client utility is installed on Windows, Linux, or Mac, you can connect to the instance using the following command format:

```
ssh -i location_of_pem_file ec2-user@ec2-instance-public-dns-name
```

For example, assume that `ec2-database-connect-key-pair.pem` is stored in `/dir1` on Linux, and the public IPv4 DNS for your EC2 instance is `ec2-12-345-678-90.compute-1.amazonaws.com`. Your SSH command would look as follows:

```
ssh -i /dir1/ec2-database-connect-key-pair.pem ec2-
user@ec2-12-345-678-90.compute-1.amazonaws.com
```

2. Get the latest bug fixes and security updates by updating the software on your EC2 instance. To do this, use the following command.

> **Note**
>
> The `-y` option installs the updates without asking for confirmation. To examine updates before installing, omit this option.

```
sudo dnf update -y
```

3. After the updates complete, install the Apache web server, PHP, and MariaDB or PostgreSQL software using the following commands. This command installs multiple software packages and related dependencies at the same time.

   MariaDB & MySQL

   ```
   sudo dnf install -y httpd php php-mysqli mariadb105
   ```

   PostgreSQL

   ```
   sudo dnf install -y httpd php php-pgsql postgresql15
   ```

If you receive an error, your instance probably wasn't launched with an Amazon Linux 2023 AMI. You might be using the Amazon Linux 2 AMI instead. You can view your version of Amazon Linux using the following command.

```
cat /etc/system-release
```

For more information, see Updating instance software.

4. Start the web server with the command shown following.

```
sudo systemctl start httpd
```

You can test that your web server is properly installed and started. To do this, enter the public Domain Name System (DNS) name of your EC2 instance in the address bar of a web browser, for example: `http://ec2-42-8-168-21.us-west-1.compute.amazonaws.com`. If your web server is running, then you see the Apache test page.

If you don't see the Apache test page, check your inbound rules for the VPC security group that you created in Tutorial: Create a VPC for use with a DB cluster (IPv4 only). Make sure that your inbound rules include one allowing HTTP (port 80) access for the IP address to connect to the web server.

> **Note**
>
> The Apache test page appears only when there is no content in the document root directory, `/var/www/html`. After you add content to the document root directory, your content appears at the public DNS address of your EC2 instance. Before this point, it appears on the Apache test page.

5. Configure the web server to start with each system boot using the `systemctl` command.

```
sudo systemctl enable httpd
```

To allow `ec2-user` to manage files in the default root directory for your Apache web server, modify the ownership and permissions of the `/var/www` directory. There are many ways to

accomplish this task. In this tutorial, you add `ec2-user` to the `apache` group, to give the `apache` group ownership of the `/var/www` directory and assign write permissions to the group.

To set file permissions for the Apache web server

1. Add the `ec2-user` user to the `apache` group.

   ```
   sudo usermod -a -G apache ec2-user
   ```

2. Log out to refresh your permissions and include the new `apache` group.

   ```
   exit
   ```

3. Log back in again and verify that the `apache` group exists with the `groups` command.

   ```
   groups
   ```

   Your output looks similar to the following:

   ```
   ec2-user adm wheel apache systemd-journal
   ```

4. Change the group ownership of the `/var/www` directory and its contents to the `apache` group.

   ```
   sudo chown -R ec2-user:apache /var/www
   ```

5. Change the directory permissions of `/var/www` and its subdirectories to add group write permissions and set the group ID on subdirectories created in the future.

   ```
   sudo chmod 2775 /var/www
   find /var/www -type d -exec sudo chmod 2775 {} \;
   ```

6. Recursively change the permissions for files in the `/var/www` directory and its subdirectories to add group write permissions.

   ```
   find /var/www -type f -exec sudo chmod 0664 {} \;
   ```

Now, `ec2-user` (and any future members of the `apache` group) can add, delete, and edit files in the Apache document root. This makes it possible for you to add content, such as a static website or a PHP application.

> **Note**
>
> A web server running the HTTP protocol provides no transport security for the data that it sends or receives. When you connect to an HTTP server using a web browser, much information is visible to eavesdroppers anywhere along the network pathway. This information includes the URLs that you visit, the content of web pages that you receive, and the contents (including passwords) of any HTML forms.
> The best practice for securing your web server is to install support for HTTPS (HTTP Secure). This protocol protects your data with SSL/TLS encryption. For more information, see Tutorial: Configure SSL/TLS with the Amazon Linux AMI in the *Amazon EC2 User Guide*.

Connect your Apache web server to your DB cluster

Next, you add content to your Apache web server that connects to your Amazon Aurora DB cluster.

To add content to the Apache web server that connects to your DB cluster

1. While still connected to your EC2 instance, change the directory to `/var/www` and create a new subdirectory named `inc`.

   ```
   cd /var/www
   mkdir inc
   cd inc
   ```

2. Create a new file in the `inc` directory named `dbinfo.inc`, and then edit the file by calling nano (or the editor of your choice).

   ```
   >dbinfo.inc
   nano dbinfo.inc
   ```

3. Add the following contents to the `dbinfo.inc` file. Here, *`db_instance_endpoint`* is DB cluster writer endpoint, without the port, for your DB cluster.

> **Note**
>
> We recommend placing the user name and password information in a folder that isn't part of the document root for your web server. Doing this reduces the possibility of your security information being exposed.
> Make sure to change `master password` to a suitable password in your application.

```
<?php

define('DB_SERVER', 'db_cluster_writer_endpoint');
define('DB_USERNAME', 'tutorial_user');
define('DB_PASSWORD', 'master password');
define('DB_DATABASE', 'sample');
?>
```

4. Save and close the `dbinfo.inc` file. If you are using nano, save and close the file by using Ctrl +S and Ctrl+X.
5. Change the directory to `/var/www/html`.

```
cd /var/www/html
```

6. Create a new file in the `html` directory named `SamplePage.php`, and then edit the file by calling nano (or the editor of your choice).

```
>SamplePage.php
nano SamplePage.php
```

7. Add the following contents to the `SamplePage.php` file:

   MariaDB & MySQL

```
<?php include "../inc/dbinfo.inc"; ?>
<html>
<body>
<h1>Sample page</h1>
<?php

  /* Connect to MySQL and select the database. */
```

```
  $connection = mysqli_connect(DB_SERVER, DB_USERNAME, DB_PASSWORD);

  if (mysqli_connect_errno()) echo "Failed to connect to MySQL: " .
 mysqli_connect_error();

  $database = mysqli_select_db($connection, DB_DATABASE);

  /* Ensure that the EMPLOYEES table exists. */
  VerifyEmployeesTable($connection, DB_DATABASE);

  /* If input fields are populated, add a row to the EMPLOYEES table. */
  $employee_name = htmlentities($_POST['NAME']);
  $employee_address = htmlentities($_POST['ADDRESS']);

  if (strlen($employee_name) || strlen($employee_address)) {
    AddEmployee($connection, $employee_name, $employee_address);
  }
?>

<!-- Input form -->
<form action="<?PHP echo $_SERVER['SCRIPT_NAME'] ?>" method="POST">
  <table border="0">
    <tr>
      <td>NAME</td>
      <td>ADDRESS</td>
    </tr>
    <tr>
      <td>
        <input type="text" name="NAME" maxlength="45" size="30" />
      </td>
      <td>
        <input type="text" name="ADDRESS" maxlength="90" size="60" />
      </td>
      <td>
        <input type="submit" value="Add Data" />
      </td>
    </tr>
  </table>
</form>

<!-- Display table data. -->
<table border="1" cellpadding="2" cellspacing="2">
  <tr>
    <td>ID</td>
```

```
    <td>NAME</td>
    <td>ADDRESS</td>
  </tr>

<?php

$result = mysqli_query($connection, "SELECT * FROM EMPLOYEES");

while($query_data = mysqli_fetch_row($result)) {
  echo "<tr>";
  echo "<td>",$query_data[0], "</td>",
       "<td>",$query_data[1], "</td>",
       "<td>",$query_data[2], "</td>";
  echo "</tr>";
}
?>

</table>

<!-- Clean up. -->
<?php

  mysqli_free_result($result);
  mysqli_close($connection);

?>

</body>
</html>


<?php

/* Add an employee to the table. */
function AddEmployee($connection, $name, $address) {
   $n = mysqli_real_escape_string($connection, $name);
   $a = mysqli_real_escape_string($connection, $address);

   $query = "INSERT INTO EMPLOYEES (NAME, ADDRESS) VALUES ('$n', '$a');";

   if(!mysqli_query($connection, $query)) echo("<p>Error adding employee data.</
p>");
}
```

```
/* Check whether the table exists and, if not, create it. */
function VerifyEmployeesTable($connection, $dbName) {
  if(!TableExists("EMPLOYEES", $connection, $dbName))
  {
     $query = "CREATE TABLE EMPLOYEES (
         ID int(11) UNSIGNED AUTO_INCREMENT PRIMARY KEY,
         NAME VARCHAR(45),
         ADDRESS VARCHAR(90)
       )";

     if(!mysqli_query($connection, $query)) echo("<p>Error creating table.</
p>");
  }
}

/* Check for the existence of a table. */
function TableExists($tableName, $connection, $dbName) {
  $t = mysqli_real_escape_string($connection, $tableName);
  $d = mysqli_real_escape_string($connection, $dbName);

  $checktable = mysqli_query($connection,
      "SELECT TABLE_NAME FROM information_schema.TABLES WHERE TABLE_NAME = '$t'
 AND TABLE_SCHEMA = '$d'");

  if(mysqli_num_rows($checktable) > 0) return true;

  return false;
}
?>
```

PostgreSQL

```
<?php include "../inc/dbinfo.inc"; ?>

<html>
<body>
<h1>Sample page</h1>
<?php

/* Connect to PostgreSQL and select the database. */
$constring = "host=" . DB_SERVER . " dbname=" . DB_DATABASE . " user=" .
 DB_USERNAME . " password=" . DB_PASSWORD ;
```

```
$connection = pg_connect($constring);

if (!$connection){
 echo "Failed to connect to PostgreSQL";
 exit;
}

/* Ensure that the EMPLOYEES table exists. */
VerifyEmployeesTable($connection, DB_DATABASE);

/* If input fields are populated, add a row to the EMPLOYEES table. */
$employee_name = htmlentities($_POST['NAME']);
$employee_address = htmlentities($_POST['ADDRESS']);

if (strlen($employee_name) || strlen($employee_address)) {
  AddEmployee($connection, $employee_name, $employee_address);
}

?>

<!-- Input form -->
<form action="<?PHP echo $_SERVER['SCRIPT_NAME'] ?>" method="POST">
  <table border="0">
    <tr>
      <td>NAME</td>
      <td>ADDRESS</td>
    </tr>
    <tr>
      <td>
    <input type="text" name="NAME" maxlength="45" size="30" />
      </td>
      <td>
    <input type="text" name="ADDRESS" maxlength="90" size="60" />
      </td>
      <td>
    <input type="submit" value="Add Data" />
      </td>
    </tr>
  </table>
</form>
<!-- Display table data. -->
<table border="1" cellpadding="2" cellspacing="2">
  <tr>
    <td>ID</td>
```

```
    <td>NAME</td>
    <td>ADDRESS</td>
  </tr>

<?php

$result = pg_query($connection, "SELECT * FROM EMPLOYEES");

while($query_data = pg_fetch_row($result)) {
  echo "<tr>";
  echo "<td>",$query_data[0], "</td>",
       "<td>",$query_data[1], "</td>",
       "<td>",$query_data[2], "</td>";
  echo "</tr>";
}
?>
</table>

<!-- Clean up. -->
<?php

  pg_free_result($result);
  pg_close($connection);
?>
</body>
</html>


<?php

/* Add an employee to the table. */
function AddEmployee($connection, $name, $address) {
   $n = pg_escape_string($name);
   $a = pg_escape_string($address);
   echo "Forming Query";
   $query = "INSERT INTO EMPLOYEES (NAME, ADDRESS) VALUES ('$n', '$a');";

   if(!pg_query($connection, $query)) echo("<p>Error adding employee data.</
p>");
}

/* Check whether the table exists and, if not, create it. */
function VerifyEmployeesTable($connection, $dbName) {
  if(!TableExists("EMPLOYEES", $connection, $dbName))
```

```
  {
     $query = "CREATE TABLE EMPLOYEES (
         ID serial PRIMARY KEY,
         NAME VARCHAR(45),
         ADDRESS VARCHAR(90)
       )";

     if(!pg_query($connection, $query)) echo("<p>Error creating table.</p>");
  }
}
/* Check for the existence of a table. */
function TableExists($tableName, $connection, $dbName) {
  $t = strtolower(pg_escape_string($tableName)); //table name is case sensitive
  $d = pg_escape_string($dbName); //schema is 'public' instead of 'sample' db
 name so not using that

  $query = "SELECT TABLE_NAME FROM information_schema.TABLES WHERE TABLE_NAME =
 '$t';";
  $checktable = pg_query($connection, $query);

  if (pg_num_rows($checktable) >0) return true;
  return false;

}
?>
```

8. Save and close the `SamplePage.php` file.
9. Verify that your web server successfully connects to your DB cluster by opening a web browser and browsing to `http://`*`EC2 instance endpoint`*`/SamplePage.php`, for example: `http://ec2-12-345-67-890.us-west-2.compute.amazonaws.com/SamplePage.php`.

You can use `SamplePage.php` to add data to your DB cluster. The data that you add is then displayed on the page. To verify that the data was inserted into the table, install MySQL client on the Amazon EC2 instance. Then connect to the DB cluster and query the table.

For information about connecting to a DB cluster, see Connecting to an Amazon Aurora DB cluster.

To make sure that your DB cluster is as secure as possible, verify that sources outside of the VPC can't connect to your DB cluster.

After you have finished testing your web server and your database, you should delete your DB cluster and your Amazon EC2 instance.

- To delete a DB cluster, follow the instructions in Deleting Aurora DB clusters and DB instances. You don't need to create a final snapshot.
- To terminate an Amazon EC2 instance, follow the instruction in Terminate your instance in the *Amazon EC2 User Guide*.

Amazon Aurora tutorials and sample code

The Amazon documentation includes several tutorials that guide you through common Amazon Aurora use cases. Many of these tutorials show you how to use Amazon Aurora with other Amazon services. In addition, you can access sample code in .

> **Note**
>
> You can find more tutorials at the Amazon Database Blog. For information about training, see Amazon Training and Certification.

Topics

- Tutorials in this guide
- Tutorials in other Amazon guides
- Tutorials and sample code in GitHub
- Amazon Database Cookbook
- Amazon workshop and lab content portal for Amazon Aurora PostgreSQL
- Amazon workshop and lab content portal for Amazon Aurora MySQL
- Using this service with an Amazon SDK

Tutorials in this guide

The following tutorials in this guide show you how to perform common tasks with Amazon Aurora:

- Tutorial: Create a VPC for use with a DB cluster (IPv4 only)

  Learn how to include a DB cluster in a virtual private cloud (VPC) based on the Amazon VPC service. In this case, the VPC shares data with a web server that is running on an Amazon EC2 instance in the same VPC.

- Tutorial: Create a VPC for use with a DB cluster (dual-stack mode)

  Learn how to include a DB cluster in a virtual private cloud (VPC) based on the Amazon VPC service. In this case, the VPC shares data with an Amazon EC2 instance in the same VPC. In this

tutorial, you create the VPC for this scenario that works with a database running in dual-stack mode.

- Tutorial: Create a web server and an Amazon Aurora DB cluster

  Learn how to install an Apache web server with PHP and create a MySQL database. The web server runs on an Amazon EC2 instance using Amazon Linux, and the MySQL database is an Aurora MySQL DB cluster. Both the Amazon EC2 instance and the DB cluster run in an Amazon VPC.

- Tutorial: Restore an Amazon Aurora DB cluster from a DB cluster snapshot

  Learn how to restore a DB cluster from a DB cluster snapshot.

- Tutorial: Use tags to specify which Aurora DB clusters to stop

  Learn how to use tags to specify which Aurora DB clusters to stop.

- Tutorial: Log DB instance state changes using Amazon EventBridge

  Learn how to log a DB instance state change using Amazon EventBridge and Amazon Lambda.

Tutorials in other Amazon guides

The following tutorials in other Amazon guides show you how to perform common tasks with Amazon Aurora:

> **Note**
>
> Some of the tutorials use Amazon RDS DB instances, but they can be adapted to use Aurora DB clusters.

- Tutorial: Aurora Serverless in the *Amazon AppSync Developer Guide*

  Learn how to use Amazon AppSync to provide a data source for running SQL commands against Aurora Serverless DB clusters with the Data API enabled. You can use Amazon AppSync resolvers to run SQL statements against the Data API with GraphQL queries, mutations, and subscriptions.

- Tutorial: Rotating a Secret for an Amazon Database in the *Amazon Secrets Manager User Guide*

Learn how to create a secret for an Amazon database and configure the secret to rotate on a schedule. You trigger one rotation manually, and then confirm that the new version of the secret continues to provide access.

- Tutorials and samples in the *Amazon Elastic Beanstalk Developer Guide*

  Learn how to deploy applications that use Amazon RDS databases with Amazon Elastic Beanstalk.

- Using Data from an Amazon RDS Database to Create an Amazon ML Datasource in the *Amazon Machine Learning Developer Guide*

  Learn how to create an Amazon Machine Learning (Amazon ML) datasource object from data stored in a MySQL DB instance.

- Manually Enabling Access to an Amazon RDS Instance in a VPC in the *Amazon Quick User Guide*

  Learn how to enable Quick access to an Amazon RDS DB instance in a VPC.

Tutorials and sample code in GitHub

The following tutorials and sample code in GitHub show you how to perform common tasks with Amazon Aurora:

- Creating an Aurora serverless lending library

  Learn how to create a lending library application where patrons can borrow and return books. The example uses Aurora serverless and Amazon SDK for Python (Boto3).

- Creating an Amazon Aurora item tracker application with a Spring REST API that queries Aurora serverless data using SDK for Java 2.x

  Learn how to create a Spring REST API that queries Aurora serverless data. It's for use by a React application using SDK for Java 2.x.

- Creating an Amazon Aurora item tracker application that queries Aurora serverless data using Amazon SDK for PHP

  Learn how to create an application that uses the `RdsDataClient` of the Data API and Aurora serverless to track and report on work items. The example uses Amazon SDK for PHP.

- Creating an Amazon Aurora item tracker application that queries Aurora serverless data using Amazon SDK for Python (Boto3)

Learn how to create an application that uses the `RdsDataClient` of the Data API and Aurora serverless to track and report on work items. The example uses Amazon SDK for Python (Boto3).

Amazon Database Cookbook

The Amazon DB Cookbook is a comprehensive database guide that teaches you how to build, deploy, and manage high-performing, cost-effective database solutions on Amazon. Step-by-step tutorials guide you through creating production-ready applications and deploying the apps with CloudFormation templates. You'll learn essential Amazon services as you build infrastructure, implement networking, develop serverless architectures, manage databases, and integrate generative AI. Learn Amazon best practices that help you create secure, scalable solutions while optimizing costs. Whether you're new to Amazon or an experienced professional, the Amazon DB Cookbook helps you develop skills to solve common database challenges and implement enterprise-ready solutions. The cookbook includes the following sections:

- **Getting started with Amazon for DB applications** – Learn Amazon fundamentals like how to set up your account and Jupyter Notebook environment.
- **Database fundamentals** – Explore essential database concepts and compare Amazon database services to choose the right solution for your workloads.
- **Serverless web app with Amazon Aurora** – Build an end-to-end retail application with Amazon Aurora PostgreSQL that handles inventory, orders, and customer data.
- **Monitoring and observability** – Set up performance tracking and configure alerts to identify potential database issues before they impact your applications.
- **Scaling with Amazon Aurora** – Learn to build resilient multi-Region deployments with Aurora DSQL, and how to scale your databases up for more processing power or out across multiple instances for greater capacity.
- **Optimization performance and cost** – Optimize your database performance and reduce costs with proven tuning strategies.
- **Journey to Amazon purpose-built databases** – Build a secure, reliable infrastructure that scales your generative AI solutions and data-driven applications from prototype to enterprise deployment.
- **GenAI applications with RAG** – Build an intelligent search system for insurance and healthcare documents that uses Retrieval Augmented Generation (RAG) to deliver accurate, context-aware results.

Amazon workshop and lab content portal for Amazon Aurora PostgreSQL

The following collection of workshops and other hands-on content helps you to gain an understanding of the Amazon Aurora PostgreSQL features and capabilities:

- Creating a New Aurora Cluster Manually

  Learn how to create an Amazon Aurora PostgreSQL cluster manually.
- Configure Cloud9 and Initialize Database

  Learn how to configure Cloud9 and initialize the PostgreSQL database.
- Fast Cloning

  Learn how to create an Aurora fast clone.
- Query Plan Management

  Learn how to control execution plans for a set of statements using query plan management.
- Cluster Cache Management

  Learn about Cluster Cache Management feature in Aurora PostgreSQL.
- Database Activity Streaming

  Learn how to monitor and audit your database activity with this feature.
- Using Performance Insights

  Learn how to monitor and tune your DB instance using Performance insights.
- Performance Monitoring with RDS Tools

  Learn how to use Amazon and Postgres tools(Cloudwatch, Enhanced Monitoring, Slow Query Logs, Performance Insights, PostgreSQL Catalog Views) to understand performance issues and identify ways to improve performance of your database.
- Auto Scaling Read Replicas

  Learn how Aurora read replica auto scaling works in practice using a load generator script.
- Testing Fault Tolerance

  Learn how a DB cluster can tolerate a failure.

- Aurora Global Database

  Learn about Aurora Global Database.
- Using Machine Learning

  Learn about Aurora Machine Learning.
- Aurora serverless

  Learn about Aurora serverless.
- Trusted Language Extensions for Aurora PostgreSQL

  Learn how to build high-performance extensions that run safely on Aurora PostgreSQL.

Amazon workshop and lab content portal for Amazon Aurora MySQL

The following collection of workshops and other hands-on content helps you to gain an understanding of the Amazon Aurora MySQL features and capabilities:

- Creating an Aurora Cluster

  Learn how to create an Amazon Aurora MySQL cluster manually.
- Creating a Cloud9 Cloud-based IDE environment to connect to your database

  Learn how to configure Cloud9 and initialize the MySQL database.
- Fast Cloning

  Learn how to create an Aurora fast clone.
- Backtrack a Cluster

  Learn how to backtrack a DB cluster.
- Using Performance Insights

  Learn how to monitor and tune your DB instance using Performance insights.
- Performance Monitoring with RDS Tools

  Learn how to use Amazon and SQL tools to understand performance issues and identify ways to improve performance of your database.

- Analyze Query Performance

  Learn how to troubleshoot SQL performance related issues using different tools.
- Auto Scaling Read Replicas

  Learn how auto scaling read replicas work.
- Testing Fault Tolerance

  Learn about high availability and fault tolerance features in Aurora MySQL.
- Aurora Global Database

  Learn about Aurora Global Database.
- Aurora serverless

  Learn about Aurora serverless.
- Using Machine Learning

  Learn about Aurora Machine Learning.

Using this service with an Amazon SDK

Amazon software development kits (SDKs) are available for many popular programming languages. Each SDK provides an API, code examples, and documentation that make it easier for developers to build applications in their preferred language.

SDK documentation
Amazon CLI
Amazon SDK for Java
Amazon SDK for JavaScript
Amazon SDK for .NET
Amazon SDK for PHP
Amazon Tools for PowerShell

SDK documentation
Amazon SDK for Python (Boto3)
Amazon SDK for Ruby
Amazon SDK for SAP ABAP

For examples specific to this service, see Code examples for Aurora using Amazon SDKs.

Programmatic access to Amazon Aurora

Amazon RDS provides you with the following tools to manage your Amazon Aurora resources programmatically.

Amazon Command Line Interface (Amazon CLI)

You can create and manage your Amazon Aurora resources by using the Amazon CLI in a command-line shell. The Amazon CLI provides direct access to the APIs for Amazon services, such as Amazon RDS. For syntax and examples for the commands for Amazon RDS, see rds in the *Amazon CLI Command Reference*.

Amazon CloudFormation

With this Amazon Infrastructure as Code (IaC) tool, you can create templates that describe all of the Amazon Aurora resources that you want, and Amazon CloudFormation provisions and configures those resources for you. For more information, see the section called "Creating resources with Amazon CloudFormation".

Amazon software development kits (SDKs)

Amazon provides SDKs for many popular technologies and programming languages. They make it easier for you to call Amazon services from within your applications in that language or technology. For more information about these SDKs, see Tools for developing and managing applications on Amazon.

Amazon RDS API

This API is the protocol-level interface for Amazon RDS. When using this API, you must format every HTTPS request correctly and add a valid digital signature to every request. For more information, see *Amazon RDS API reference*.

Console-to-Code

With this tool, you can generate code for actions that you perform in the Amazon RDS console, and use that code in other tools such as Amazon CloudFormation. For more information, see the section called "Console-to-Code".

RDS Data API

RDS Data API (Data API) provides programmatic access to the data in your Amazon Aurora Serverless databases. With Data API, you can use a secure HTTP endpoint to run your SQL

statements without managing connections. For more information, see *Using the Amazon RDS Data API*.

Use Console-to-Code to generate code for your Amazon Aurora console actions

The console provides a guided path for creating resources and testing prototypes. If you want to create the same resources at scale, you'll need automation code. Console-to-Code is a feature of Amazon Q Developer that can help you get started with your automation code. Console-to-Code records your console actions, including default values and parameters values that you provide. It then uses generative AI to suggest code in your preferred language and format for the actions that you choose. Because the console workflow makes sure the parameter values that you specify are valid together, the code that you generate by using Console-to-Code has compatible parameter values. You can use the code as a starting point, and then customize it to make it production-ready for your specific use case.

For example, with Console-to-Code, you can record creating an Aurora DB cluster and choose to generate code in Amazon CloudFormation JSON format. Then, you can copy that code and customize it for use in your Amazon CloudFormation template.

Console-to-Code can currently generate infrastructure-as-code (IaC) in the following languages and formats:

- CDK Java
- CDK Python
- CDK TypeScript
- CloudFormation JSON
- CloudFormation YAML

For more information and instructions on how to use Console-to-Code, see Automating Amazon services with Amazon Q Developer Console-to-Code in the *Amazon Q Developer User Guide*.

Setting up an Amazon Aurora DB cluster

This section shows how to set up your Aurora DB cluster. Before creating an Aurora DB cluster, decide on the DB instance class that will run the DB cluster. Also, decide where the DB cluster will run by choosing an Amazon Region. Next, create the DB cluster. If you have data outside of Aurora, you can migrate the data into an Aurora DB cluster.

Topics

- Creating an Amazon Aurora DB cluster
- Creating Amazon Aurora resources with Amazon CloudFormation
- Connecting to an Amazon Aurora DB cluster
- Parameter groups for Amazon Aurora
- Migrating data to an Amazon Aurora DB cluster
- Creating an Amazon ElastiCache cache using Aurora DB cluster settings
- Auto migrating databases to Amazon Aurora using Amazon Database Migration Service
- Tutorial: Creating a MySQL DB cluster with a custom parameter group

Creating an Amazon Aurora DB cluster

An Amazon Aurora DB cluster consists of a DB instance, compatible with either MySQL or PostgreSQL, and a cluster volume that holds the data for the DB cluster, copied across three Availability Zones as a single, virtual volume. By default, an Aurora DB cluster contains a primary DB instance that performs reads and writes, and, optionally, up to 15 Aurora Replicas (reader DB instances). For more information about Aurora DB clusters, see Amazon Aurora DB clusters.

Aurora has two main types of DB cluster:

- Aurora provisioned – You choose the DB instance class for the writer and reader instances based on your expected workload. For more information, see Amazon AuroraDB instance classes. Aurora provisioned has several options, including Aurora global databases. For more information, see Using Amazon Aurora Global Database.
- Aurora Serverless – Aurora serverless is an on-demand automatic scaling configuration for Aurora. Capacity is adjusted automatically based on application demand. You're charged only for the resources that your DB cluster consumes. This automation is especially useful for environments with highly variable and unpredictable workloads. For more information, see Using Aurora serverless.

Following, you can find out how to create an Aurora DB cluster. To get started, first see DB cluster prerequisites.

For instructions on connecting to your Aurora DB cluster, see Connecting to an Amazon Aurora DB cluster.

Contents

- DB cluster prerequisites
  - Configure the network for the DB cluster
    - Configure automatic network connectivity with an EC2 instance
    - Configure the network manually
  - Additional prerequisites
- Creating a DB cluster
  - Creating a primary (writer) DB instance
- Settings for Aurora DB clusters
- Settings that don't apply to Amazon Aurora for DB clusters

- Settings that don't apply to Amazon Aurora DB instances

DB cluster prerequisites

> **Important**
>
> Before you can create an Aurora DB cluster, you must complete the tasks in Setting up your environment for Amazon Aurora.

The following are prerequisites to complete before creating a DB cluster.

Topics

- Configure the network for the DB cluster
- Additional prerequisites

Configure the network for the DB cluster

You can create an Amazon Aurora DB cluster only in a virtual private cloud (VPC) based on the Amazon VPC service, in an Amazon Web Services Region that has at least two Availability Zones. The DB subnet group that you choose for the DB cluster must cover at least two Availability Zones. This configuration ensures that your DB cluster always has at least one DB instance available for failover, in the unlikely event of an Availability Zone failure.

If you plan to set up connectivity between your new DB cluster and an EC2 instance in the same VPC, you can do so during DB cluster creation. If you plan to connect to your DB cluster from resources other than EC2 instances in the same VPC, you can configure the network connections manually.

Topics

- Configure automatic network connectivity with an EC2 instance
- Configure the network manually

Configure automatic network connectivity with an EC2 instance

When you create an Aurora DB cluster, you can use the Amazon Web Services Management Console to set up connectivity between an Amazon EC2 instance and the new DB cluster. When you do so,

RDS configures your VPC and network settings automatically. The DB cluster is created in the same VPC as the EC2 instance so that the EC2 instance can access the DB cluster.


The following are requirements for connecting an EC2 instance with the DB cluster:

- The EC2 instance must exist in the Amazon Web Services Region before you create the DB cluster.

  If no EC2 instances exist in the Amazon Web Services Region, the console provides a link to create one.
- Currently, the DB cluster can't be an Aurora Serverless DB cluster or part of an Aurora global database.
- The user who is creating the DB instance must have permissions to perform the following operations:
  - `ec2:AssociateRouteTable`
  - `ec2:AuthorizeSecurityGroupEgress`
  - `ec2:AuthorizeSecurityGroupIngress`
  - `ec2:CreateRouteTable`
  - `ec2:CreateSubnet`
  - `ec2:CreateSecurityGroup`
  - `ec2:DescribeInstances`
  - `ec2:DescribeNetworkInterfaces`
  - `ec2:DescribeRouteTables`
  - `ec2:DescribeSecurityGroups`
  - `ec2:DescribeSubnets`
  - `ec2:ModifyNetworkInterfaceAttribute`
  - `ec2:RevokeSecurityGroupEgress`

Using this option creates a private DB cluster. The DB cluster uses a DB subnet group with only private subnets to restrict access to resources within the VPC.

To connect an EC2 instance to the DB cluster, choose **Connect to an EC2 compute resource** in the **Connectivity** section on the **Create database** page.

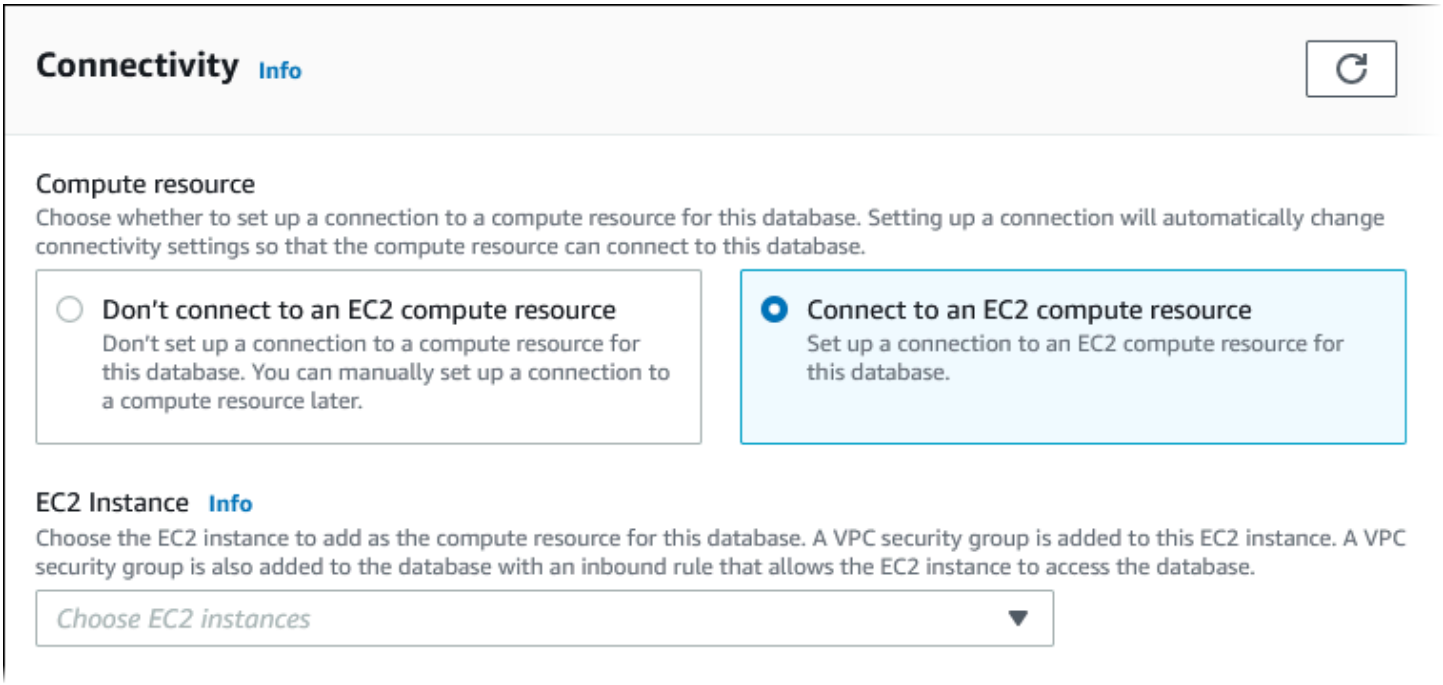

When you choose **Connect to an EC2 compute resource**, RDS sets the following options automatically. You can't change these settings unless you choose not to set up connectivity with an EC2 instance by choosing **Don't connect to an EC2 compute resource**.

Console option	Automatic setting
Network type	RDS sets network type to **IPv4**. Currently, dual-stack mode isn't supported when you set up a connection between an EC2 instance and the DB cluster.
Virtual Private Cloud (VPC)	RDS sets the VPC to the one associated with the EC2 instance.
DB subnet group	RDS requires a DB subnet group with a private subnet in the same Availability Zone as the EC2 instance. If a DB subnet group that meets this requirement exists, then RDS uses the existing DB subnet group. By default, this option is set to **Automatic setup**. When you choose **Automatic setup** and there is no DB subnet group that meets this requirement, the following action happens. RDS uses three available private subnets in three Availability Zones where one of the Availability Zones is the

Console option	Automatic setting
	same as the EC2 instance. If a private subnet isn’t available in an Availability Zone, RDS creates a private subnet in the Availability Zone. Then RDS creates the DB subnet group. When a private subnet is available, RDS uses the route table associated with the subnet and adds any subnets it creates to this route table. When no private subnet is available, RDS creates a route table without internet gateway access and adds the subnets it creates to the route table. RDS also allows you to use existing DB subnet groups. Select **Choose existing** if you want to use an existing DB subnet group of your choice.
Public access	RDS chooses **No** so that the DB cluster isn't publicly accessible. For security, it is a best practice to keep the database private and make sure it isn't accessible from the internet.

Console option	Automatic setting
VPC security group (firewall)	RDS creates a new security group that is associated with the DB cluster. The security group is named `rds-ec2-`*n*, where *n* is a number. This security group includes an inbound rule with the EC2 VPC security group (firewall) as the source. This security group that is associated with the DB cluster allows the EC2 instance to access the DB cluster. RDS also creates a new security group that is associated with the EC2 instance. The security group is named `ec2-rds-`*n*, where *n* is a number. This security group includes an outbound rule with the VPC security group of the DB cluster as the source. This security group allows the EC2 instance to send traffic to the DB cluster. You can add another new security group by choosing **Create new** and typing the name of the new security group. You can add existing security groups by choosing **Choose existing** and selecting security groups to add.
Availability Zone	When you don't create an Aurora Replica in **Availability & durability** during DB cluster creation (Single-AZ deployment), RDS chooses the Availability Zone of the EC2 instance. When you create an Aurora Replica during DB cluster creation (Multi-AZ deployment), RDS chooses the Availability Zone of the EC2 instance for one DB instance in the DB cluster. RDS randomly chooses a different Availability Zone for the other DB instance in the DB cluster. Either the primary DB instance or the Aurora Replica is created in the same Availability Zone as the EC2 instance. There is the possibility of cross Availability Zone costs if the primary DB instance and EC2 instance are in different Availability Zones.

For more information about these settings, see Settings for Aurora DB clusters.

If you make any changes to these settings after the DB cluster is created, the changes might affect the connection between the EC2 instance and the DB cluster.

Configure the network manually

If you plan to connect to your DB cluster from resources other than EC2 instances in the same VPC, you can configure the network connections manually. If you use the Amazon Web Services Management Console to create your DB cluster, you can have Amazon RDS automatically create a VPC for you. Or you can use an existing VPC or create a new VPC for your Aurora DB cluster. Whichever approach you take, your VPC must have at least one subnet in each of at least two Availability Zones for you to use it with an Amazon Aurora DB cluster.

By default, Amazon RDS creates the primary DB instance and the Aurora Replica in the Availability Zones automatically for you. To choose a specific Availability Zone, you need to change the **Availability & durability** Multi-AZ deployment setting to **Don't create an Aurora Replica**. Doing so exposes an **Availability Zone** setting that lets you choose from among the Availability Zones in your VPC. However, we strongly recommend that you keep the default setting and let Amazon RDS create a Multi-AZ deployment and choose Availability Zones for you. By doing so, your Aurora DB cluster is created with the fast failover and high availability features that are two of Aurora's key benefits.

If you don't have a default VPC or you haven't created a VPC, you can have Amazon RDS automatically create a VPC for you when you create a DB cluster using the console. Otherwise, you must do the following:

- Create a VPC with at least one subnet in each of at least two of the Availability Zones in the Amazon Web Services Region where you want to deploy your DB cluster. For more information, see Working with a DB cluster in a VPC and Tutorial: Create a VPC for use with a DB cluster (IPv4 only).
- Specify a VPC security group that authorizes connections to your DB cluster. For more information, see Provide access to the DB cluster in the VPC by creating a security group and Controlling access with security groups.
- Specify an RDS DB subnet group that defines at least two subnets in the VPC that can be used by the DB cluster. For more information, see Working with DB subnet groups.

For information on VPCs, see Amazon VPC and Amazon Aurora. For a tutorial that configures the network for a private DB cluster, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only).

If you want to connect to a resource that isn't in the same VPC as the Aurora DB cluster, see the appropriate scenarios in Scenarios for accessing a DB cluster in a VPC.

Additional prerequisites

Before you create your DB cluster, consider the following additional prerequisites:

- If you are connecting to Amazon using Amazon Identity and Access Management (IAM) credentials, your Amazon account must have IAM policies that grant the permissions required to perform Amazon RDS operations. For more information, see Identity and access management for Amazon Aurora.

  If you are using IAM to access the Amazon RDS console, you must first sign on to the Amazon Web Services Management Console with your user credentials. Then go to the Amazon RDS console at https://console.amazonaws.cn/rds/.
- If you want to tailor the configuration parameters for your DB cluster, you must specify a DB cluster parameter group and DB parameter group with the required parameter settings. For information about creating or modifying a DB cluster parameter group or DB parameter group, see Parameter groups for Amazon Aurora.
- Determine the TCP/IP port number to specify for your DB cluster. The firewalls at some companies block connections to the default ports (3306 for MySQL, 5432 for PostgreSQL) for Aurora. If your company firewall blocks the default port, choose another port for your DB cluster. All instances in a DB cluster use the same port.
- If the major engine version for your database has reached the RDS end of standard support date, you must use the Extended Support CLI option or the RDS API parameter. For more information, see RDS Extended Support in Settings for Aurora DB clusters.

Creating a DB cluster

You can create an Aurora DB cluster using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

You can create a DB cluster using the Amazon Web Services Management Console with **Easy create** enabled or not enabled. With **Easy create** enabled, you specify only the DB engine type, DB instance size, and DB instance identifier. **Easy create** uses the default setting for other

configuration options. With **Easy create** not enabled, you specify more configuration options when you create a database, including ones for availability, security, backups, and maintenance.


> **Note**
>
> For this example, **Standard create** is enabled, and **Easy create** isn't enabled. For information about creating a DB cluster with **Easy create** enabled, see Getting started with Amazon Aurora.

To create an Aurora DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the Amazon Web Services Management Console, choose the Amazon Region in which you want to create the DB cluster.

   Aurora is not available in all Amazon Regions. For a list of Amazon Regions where Aurora is available, see Region availability.
3. In the navigation pane, choose **Databases**.
4. Choose **Create database**.
5. For **Choose a database creation method**, choose **Standard create**.
6. For **Engine type**, choose one of the following:

   - **Aurora (MySQL Compatible)**
   - **Aurora (PostgreSQL Compatible)**

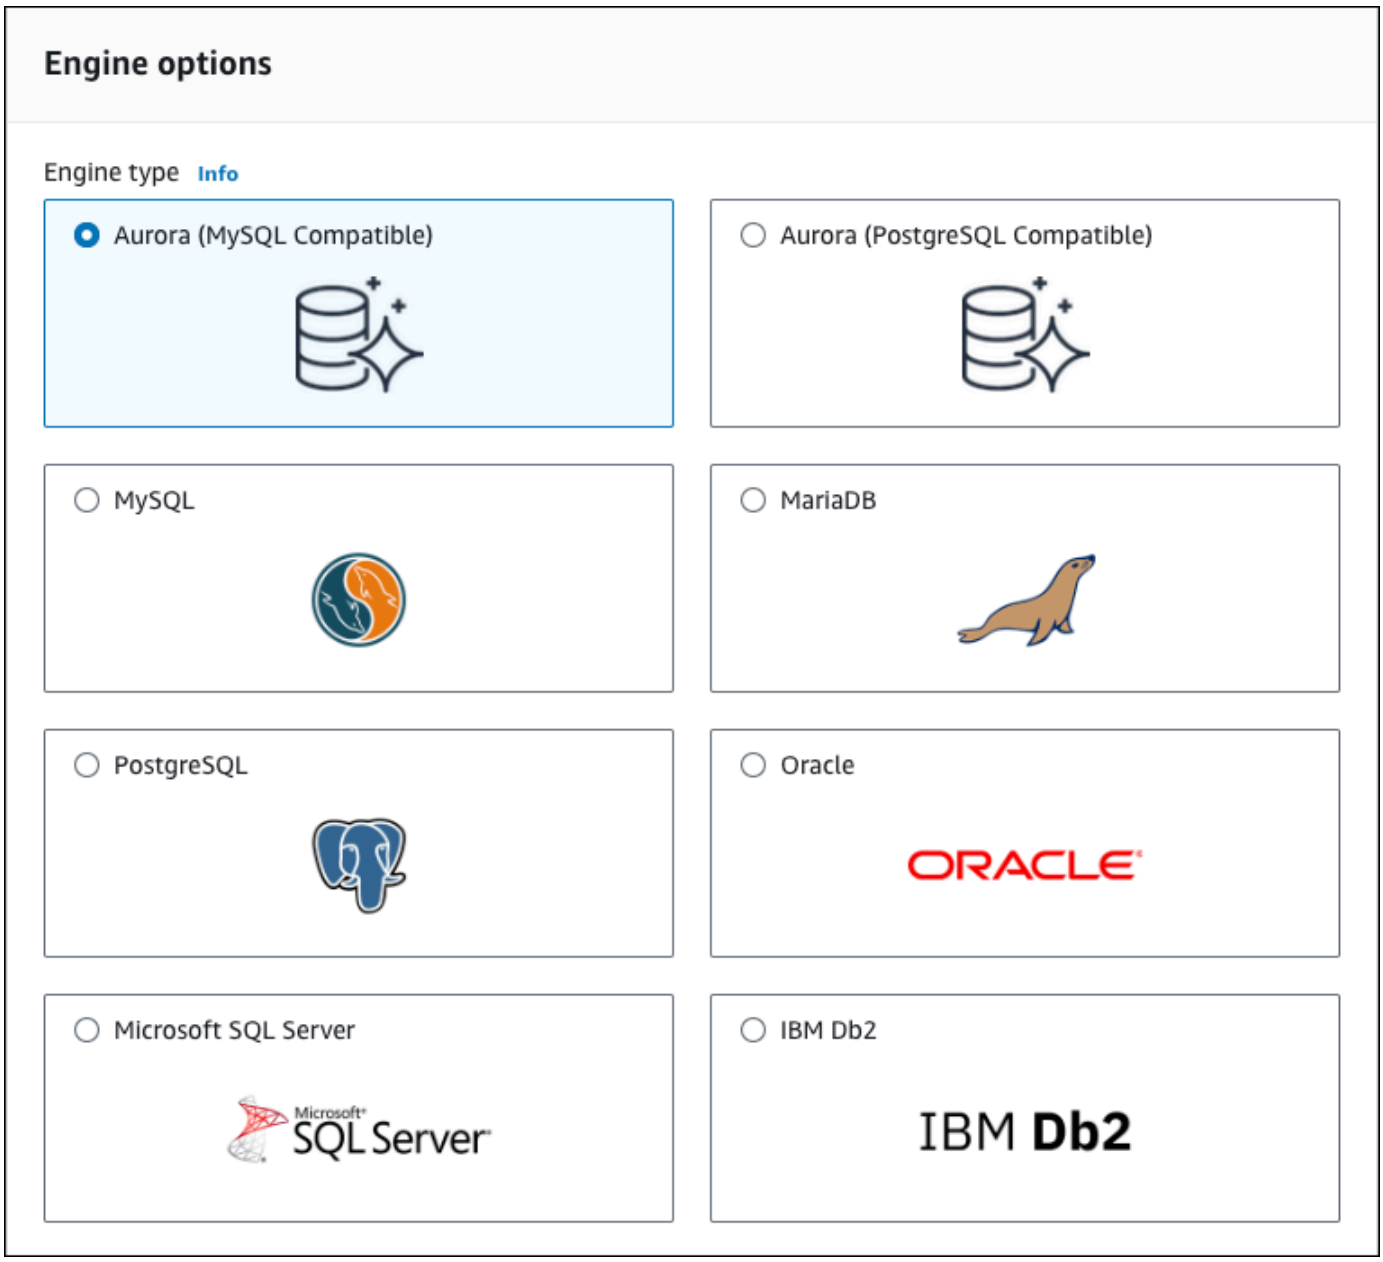

7. Choose the **Engine version**.

   For more information, see Amazon Aurora versions. You can use the filters to choose versions that are compatible with features that you want, such as Aurora serverless. For more information, see Using Aurora serverless.

8. In **Templates**, choose the template that matches your use case.
9. To enter your master password, do the following:

   a. In the **Settings** section, expand **Credential Settings**.


b. Clear the **Auto generate a password** check box.

c. (Optional) Change the **Master username** value and enter the same password in **Master password** and **Confirm password**.

By default, the new DB instance uses an automatically generated password for the master user.

10. In the **Connectivity** section under **VPC security group (firewall)**, if you select **Create new**, a VPC security group is created with an inbound rule that allows your local computer's IP address to access the database.

11. For **Cluster storage configuration**, choose either **Aurora I/O-Optimized** or **Aurora Standard**. For more information, see Storage configurations for Amazon Aurora DB clusters.

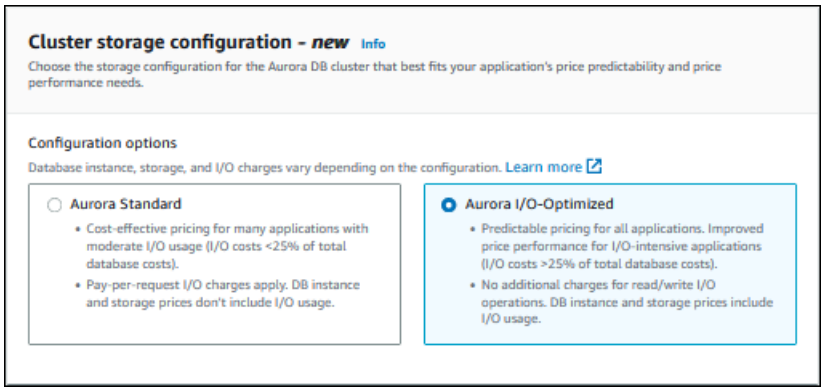

12. (Optional) Set up a connection to a compute resource for this DB cluster.

    You can configure connectivity between an Amazon EC2 instance and the new DB cluster during DB cluster creation. For more information, see Configure automatic network connectivity with an EC2 instance.

13. For the remaining sections, specify your DB cluster settings. For information about each setting, see Settings for Aurora DB clusters.

14. Choose **Create database**.

    If you chose to use an automatically generated password, the **View credential details** button appears on the **Databases** page.


    To view the master user name and password for the DB cluster, choose **View credential details**.

    To connect to the DB instance as the master user, use the user name and password that appear.

> **Important**
>
> You can't view the master user password again. If you don't record it, you might have to change it. If you need to change the master user password after the DB instance is available, you can modify the DB instance to do so. For more information about modifying a DB instance, see Modifying an Amazon Aurora DB cluster.


15. For **Databases**, choose the name of the new Aurora DB cluster.

    On the RDS console, the details for new DB cluster appear. The DB cluster and its DB instance have a status of **creating** until the DB cluster is ready to use.

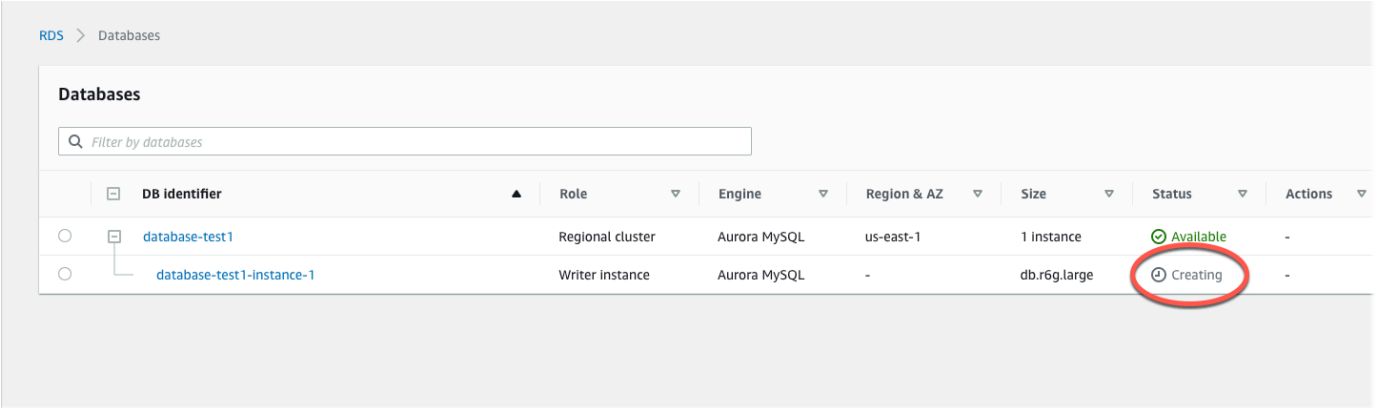

    When the state changes to **available** for both, you can connect to the DB cluster. Depending on the DB instance class and the amount of storage, it can take up to 20 minutes before the new DB cluster is available.

    To view the newly created cluster, choose **Databases** from the navigation pane in the Amazon RDS console. Then choose the DB cluster to show the DB cluster details. For more information, see Viewing an Amazon Aurora DB cluster.

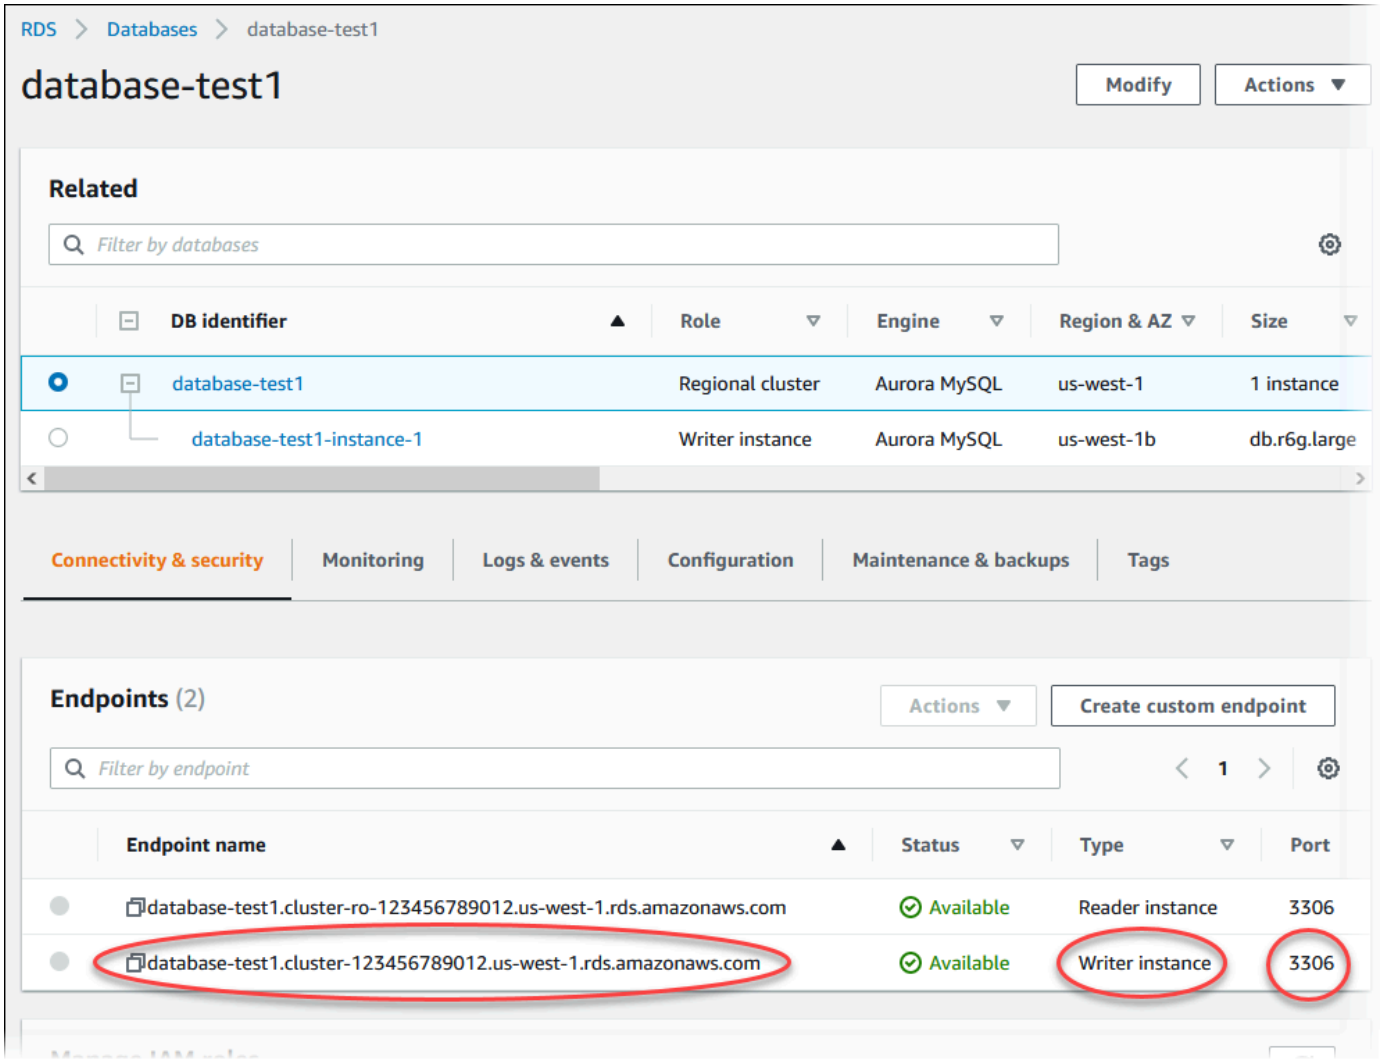

On the **Connectivity & security** tab, note the port and the endpoint of the writer DB instance. Use the endpoint and port of the cluster in your JDBC and ODBC connection strings for any application that performs write or read operations.

Amazon CLI

> **Note**
>
> Before you can create an Aurora DB cluster using the Amazon CLI, you must fulfill the required prerequisites, such as creating a VPC and an RDS DB subnet group. For more information, see DB cluster prerequisites.

You can use the Amazon CLI to create an Aurora MySQL DB cluster or an Aurora PostgreSQL DB cluster.

To create an Aurora MySQL DB cluster using the Amazon CLI

When you create an Aurora MySQL 8.0-compatible or 5.7-compatible DB cluster or DB instance, you specify `aurora-mysql` for the `--engine` option.

Complete the following steps:

1. Identify the DB subnet group and VPC security group ID for your new DB cluster, and then call the create-db-cluster Amazon CLI command to create the Aurora MySQL DB cluster.

   For example, the following command creates a new MySQL 8.0–compatible DB cluster named `sample-cluster`. The cluster uses the default engine version and the Aurora I/O-Optimized storage type.

   For Linux, macOS, or Unix:

   ```
   aws rds create-db-cluster --db-cluster-identifier sample-cluster \
       --engine aurora-mysql --engine-version 8.0 \
       --storage-type aurora-iopt1 \
       --master-username user-name --manage-master-user-password \
       --db-subnet-group-name mysubnetgroup --vpc-security-group-ids sg-c7e5b0d2
   ```

   For Windows:

   ```
   aws rds create-db-cluster --db-cluster-identifier sample-cluster ^
       --engine aurora-mysql --engine-version 8.0 ^
       --storage-type aurora-iopt1 ^
       --master-username user-name --manage-master-user-password ^
       --db-subnet-group-name mysubnetgroup --vpc-security-group-ids sg-c7e5b0d2
   ```

   The following command creates a new MySQL 5.7–compatible DB cluster named `sample-cluster`. The cluster uses the default engine version and the Aurora Standard storage type.

   For Linux, macOS, or Unix:

   ```
   aws rds create-db-cluster --db-cluster-identifier sample-cluster  \
       --engine aurora-mysql --engine-version 5.7 \
       --storage-type aurora \
   ```

```
    --master-username user-name --manage-master-user-password \
    --db-subnet-group-name mysubnetgroup --vpc-security-group-ids sg-c7e5b0d2
```

For Windows:

```
aws rds create-db-cluster --db-cluster-identifier sample-cluster sample-cluster  ^
    --engine aurora-mysql --engine-version 5.7 ^
    --storage-type aurora ^
    --master-username user-name --manage-master-user-password ^
    --db-subnet-group-name mysubnetgroup --vpc-security-group-ids sg-c7e5b0d2
```

2. If you use the console to create a DB cluster, then Amazon RDS automatically creates the primary instance (writer) for your DB cluster. If you use the Amazon CLI to create a DB cluster, you must explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster. Until you create the primary DB instance, the DB cluster endpoints remain in the `Creating` status.

   Call the create-db-instance Amazon CLI command to create the primary instance for your DB cluster. Include the name of the DB cluster as the `--db-cluster-identifier` option value.

   > **Note**
   >
   > You can't set the `--storage-type` option for DB instances. You can set it only for DB clusters.

   For example, the following command creates a new MySQL 5.7–compatible or MySQL 8.0–compatible DB instance named `sample-instance`.

   For Linux, macOS, or Unix:

```
aws rds create-db-instance --db-instance-identifier sample-instance \
     --db-cluster-identifier sample-cluster --engine aurora-mysql --db-instance-
class db.r5.large
```

   For Windows:

```
aws rds create-db-instance --db-instance-identifier sample-instance ^
```

```
    --db-cluster-identifier sample-cluster --engine aurora-mysql --db-instance-
class db.r5.large
```

To create an Aurora PostgreSQL DB cluster using the Amazon CLI

1. Identify the DB subnet group and VPC security group ID for your new DB cluster, and then call the create-db-cluster Amazon CLI command to create the Aurora PostgreSQL DB cluster.

   For example, the following command creates a new DB cluster named `sample-cluster`. The cluster uses the default engine version and the Aurora I/O-Optimized storage type.

   For Linux, macOS, or Unix:

   ```
   aws rds create-db-cluster --db-cluster-identifier sample-cluster \
       --engine aurora-postgresql \
       --storage-type aurora-iopt1 \
       --master-username user-name --manage-master-user-password \
       --db-subnet-group-name mysubnetgroup --vpc-security-group-ids sg-c7e5b0d2
   ```

   For Windows:

   ```
   aws rds create-db-cluster --db-cluster-identifier sample-cluster ^
       --engine aurora-postgresql ^
       --storage-type aurora-iopt1 ^
       --master-username user-name --manage-master-user-password ^
       --db-subnet-group-name mysubnetgroup --vpc-security-group-ids sg-c7e5b0d2
   ```

2. If you use the console to create a DB cluster, then Amazon RDS automatically creates the primary instance (writer) for your DB cluster. If you use the Amazon CLI to create a DB cluster, you must explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster. Until you create the primary DB instance, the DB cluster endpoints remain in the `Creating` status.

   Call the create-db-instance Amazon CLI command to create the primary instance for your DB cluster. Include the name of the DB cluster as the `--db-cluster-identifier` option value.

   For Linux, macOS, or Unix:

   ```
   aws rds create-db-instance --db-instance-identifier sample-instance \
   ```

```
    --db-cluster-identifier sample-cluster --engine aurora-postgresql --db-
instance-class db.r5.large
```

For Windows:

```
aws rds create-db-instance --db-instance-identifier sample-instance ^
    --db-cluster-identifier sample-cluster --engine aurora-postgresql --db-
instance-class db.r5.large
```

These examples specify the `--manage-master-user-password` option to generate the master user password and manage it in Secrets Manager. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager. Alternatively, you can use the `--master-password` option to specify and manage the password yourself.

RDS API

> **Note**
>
> Before you can create an Aurora DB cluster using the Amazon CLI, you must fulfill the required prerequisites, such as creating a VPC and an RDS DB subnet group. For more information, see DB cluster prerequisites.

Identify the DB subnet group and VPC security group ID for your new DB cluster, and then call the CreateDBCluster operation to create the DB cluster.

When you create an Aurora MySQL version 2 or 3 DB cluster or DB instance, specify `aurora-mysql` for the `Engine` parameter.

When you create an Aurora PostgreSQL DB cluster or DB instance, specify `aurora-postgresql` for the `Engine` parameter.

If you use the console to create a DB cluster, then Amazon RDS automatically creates the primary instance (writer) for your DB cluster. If you use the RDS API to create a DB cluster, you must explicitly create the primary instance for your DB cluster using the CreateDBInstance. The primary instance is the first instance that is created in a DB cluster. Until you create the primary DB instance, the DB cluster endpoints remain in the `Creating` status.

Creating a primary (writer) DB instance

If you use the Amazon Web Services Management Console to create a DB cluster, then Amazon RDS automatically creates the primary instance (writer) for your DB cluster. If you use the Amazon CLI or RDS API to create a DB cluster, you must explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster. Until you create the primary DB instance, the DB cluster endpoints remain in the `Creating` status.

For more information, see Creating a DB cluster.

> **Note**
>
> If you have a DB cluster without a writer DB instance, also called a *headless* cluster, you can't use the console to create a writer instance. You must use the Amazon CLI or RDS API.

The following example uses the create-db-instance Amazon CLI command to create a writer instance for an Aurora PostgreSQL DB cluster named `headless-test`.

```
aws rds create-db-instance \
    --db-instance-identifier no-longer-headless \
    --db-cluster-identifier headless-test \
    --engine aurora-postgresql \
    --db-instance-class db.t4g.medium
```

Settings for Aurora DB clusters

The following table contains details about settings that you choose when you create an Aurora DB cluster.

Console setting	Setting description	CLI option and RDS API parameter
Auto minor version upgrade	Choose **Enable auto minor version upgrade** if you want to enable your Aurora DB cluster to receive preferred minor version upgrades to the DB engine	Set this value for every DB instance in your Aurora cluster. If any DB instance in your cluster has this setting turned off, the cluster isn't automatically upgraded.

Console setting	Setting description	CLI option and RDS API parameter
	automatically when they become available. The **Auto minor version upgrade** setting applies to both Aurora PostgreSQL and Aurora MySQL DB clusters. For more information about engine updates for Aurora PostgreSQL, see Database engine updates for Amazon Aurora PostgreSQL. For more information about engine updates for Aurora MySQL, see Database engine updates for Amazon Aurora MySQL.	Using the Amazon CLI, run `create-db-instance` and set the `--auto-minor-version-upgrade|--no-auto-minor-version-upgrade` option. Using the RDS API, call `CreateDBInstance` and set the `AutoMinorVersionUpgrade` parameter.
Amazon KMS key	Only available if **Encryption** is set to **Enable encryption**. Choose the Amazon KMS key to use for encrypting this DB cluster. For more information, see Encrypting Amazon Aurora resources.	Using the Amazon CLI, run `create-db-cluster` and set the `--kms-key-id` option. Using the RDS API, call `CreateDBCluster` and set the `KmsKeyId` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Backtrack	Applies only to Aurora MySQL. Choose **Enable Backtrack** to enable backtracking or **Disable Backtrack** to disable backtracking. Using backtracking, you can rewind a DB cluster to a specific time, without creating a new DB cluster. It is disabled by default. If you enable backtracking, also specify the amount of time that you want to be able to backtrack your DB cluster (the target backtrack window). For more information, see Backtracking an Aurora DB cluster.	Using the Amazon CLI, run `create-db-cluster` and set the `--backtrack-window` option. Using the RDS API, call `CreateDBCluster` and set the `BacktrackWindow` parameter.
Certificate authority	The certificate authority (CA) for the server certificate used by the DB instances in the DB cluster. For more information, see Using SSL/TLS to encrypt a connection to a DB cluster.	Using the Amazon CLI, run `create-db-instance` and set the `--ca-certificate-identifier` option. Using the RDS API, call `CreateDBInstance` and set the `CACertificateIdentifier` parameter.
Cluster storage configuration	The storage type for the DB cluster: **Aurora I/O-Optimized** or **Aurora Standard**. For more information, see Storage configurations for Amazon Aurora DB clusters.	Using the Amazon CLI, run `create-db-cluster` and set the `--storage-type` option. Using the RDS API, call `CreateDBCluster` and set the `StorageType` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Copy tags to snapshots	Choose this option to copy any DB instance tags to a DB snapshot when you create a snapshot. For more information, see Tagging Amazon Aurora andAmazon RDS resources.	Using the Amazon CLI, run `create-db-cluster` and set the `--copy-tags-to-snapshot | --no-copy-tags-to-snapshot` option. Using the RDS API, call `CreateDBCluster` and set the `CopyTagsToSnapshot` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Database authentication	The database authentication you want to use. For MySQL: • Choose **Password authentication** to authenticate database users with database passwords only. • Choose **Password and IAM database authentication** to authenticate database users with database passwords and user credentials through IAM users and roles. For more information, see IAM database authentication . For PostgreSQL: • Choose **IAM database authentication** to authenticate database users with database passwords and user credentials through users and roles. For more information, see IAM database authentication . • Choose **Kerberos authentication** to authenticate database passwords and user credentials using Kerberos authentication. For more information, see Using	To use IAM database authentication with the Amazon CLI, run `create-db-cluster` and set the `--enable-iam-database-authentication | --no-enable-iam-database-authentication` option. To use IAM database authentication with the RDS API, call `CreateDBCluster` and set the `EnableIAMDatabaseAuthentication` parameter. To use Kerberos authentication with the Amazon CLI, run `create-db-cluster` and set the `--domain` and `--domain-iam-role-name` options. To use Kerberos authentication with the RDS API, call `CreateDBCluster` and set the `Domain` and `DomainIAMRoleName` parameters.

Console setting	Setting description	CLI option and RDS API parameter
	Kerberos authentication with Aurora PostgreSQL.	
Database port	Specify the port for applications and utilities to use to access the database. Aurora MySQL DB clusters default to the default MySQL port, 3306, and Aurora PostgreSQL DB clusters default to the default PostgreSQL port, 5432. The firewalls at some companies block connections to these default ports. If your company firewall blocks the default port, choose another port for the new DB cluster.	Using the Amazon CLI, run `create-db-cluster` and set the `--port` option. Using the RDS API, call `CreateDBCluster` and set the `Port` parameter.

Console setting	Setting description	CLI option and RDS API parameter
DB cluster identifier	Enter a name for your DB cluster that is unique for your account in the Amazon Region that you chose. This identifier is used in the cluster endpoint address for your DB cluster. For information on the cluster endpoint, see Amazon Aurora endpoint connections. The DB cluster identifier has the following constraints: • It must contain from 1 to 63 alphanumeric characters or hyphens. • Its first character must be a letter. • It cannot end with a hyphen or contain two consecutive hyphens. • It must be unique for all DB clusters per Amazon account, per Amazon Region.	Using the Amazon CLI, run `create-db-cluster` and set the `--db-cluster-identifier` option. Using the RDS API, call `CreateDBCluster` and set the `DBClusterIdentifier` parameter.
DB cluster parameter group	Choose a DB cluster parameter group. Aurora has a default DB cluster parameter group you can use, or you can create your own DB cluster parameter group. For more information about DB cluster parameter groups, see Parameter groups for Amazon Aurora.	Using the Amazon CLI, run `create-db-cluster` and set the `--db-cluster-parameter-group-name` option. Using the RDS API, call `CreateDBCluster` and set the `DBClusterParameterGroupName` parameter.

Console setting	Setting description	CLI option and RDS API parameter
DB instance class	Applies only to the provision ed capacity type. Choose a DB instance class that defines the processing and memory requirements for each instance in the DB cluster. For more informati on about DB instance classes, see Amazon AuroraDB instance classes.	Set this value for every DB instance in your Aurora cluster. Using the Amazon CLI, run `create-db-instance` and set the `--db-instance-class` option. Using the RDS API, call `CreateDBInstance` and set the `DBInstanceClass` parameter.
DB parameter group	Choose a parameter group. Aurora has a default parameter group you can use, or you can create your own parameter group. For more information about parameter groups, see Parameter groups for Amazon Aurora.	Set this value for every DB instance in your Aurora cluster. Using the Amazon CLI, run `create-db-instance` and set the `--db-parameter-group-name` option. Using the RDS API, call `CreateDBInstance` and set the `DBParameterGroupName` parameter.

Console setting	Setting description	CLI option and RDS API parameter
DB subnet group	The DB subnet group you want to use for the DB cluster. Select **Choose existing** to use an existing DB subnet group. Then choose the required subnet group from the **Existing DB subnet groups** dropdown list. Choose **Automatic setup** to let RDS select a compatible DB subnet group. If none exist, RDS creates a new subnet group for your cluster. For more information, see DB cluster prerequisites.	Using the Amazon CLI, run `create-db-cluster` and set the `--db-subnet-group-name` option. Using the RDS API, call `CreateDBCluster` and set the `DBSubnetGroupName` parameter.
Enable deletion protection	Choose **Enable deletion protection** to prevent your DB cluster from being deleted. If you create a production DB cluster with the console, deletion protection is enabled by default.	Using the Amazon CLI, run `create-db-cluster` and set the `--deletion-protection | --no-deletion-protection` option. Using the RDS API, call `CreateDBCluster` and set the `DeletionProtection` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Enable encryption	Choose `Enable encryption` to enable encryption at rest for this DB cluster. For more informati on, see Encrypting Amazon Aurora resources.	Using the Amazon CLI, run `create-db-cluster` and set the `--storage-encrypted | --no-storage-encrypted` option. Using the RDS API, call `CreateDBCluster` and set the `StorageEncrypted` parameter.
Enable Enhanced Monitoring	Choose **Enable enhanced monitoring** to enable gathering metrics in real time for the operating system that your DB cluster runs on. For more information, see Monitoring OS metrics with Enhanced Monitorin g.	Set these values for every DB instance in your Aurora cluster. Using the Amazon CLI, run `create-db-instance` and set the `--monitoring-interval` and `--monitoring-role-arn` options. Using the RDS API, call `CreateDBInstance` and set the `MonitoringInterval` and `MonitoringRoleArn` parameters.
Enable the RDS Data API	Choose **Enable the RDS Data API** to enable RDS Data API (Data API). Data API provides a secure HTTP endpoint for running SQL statements without managing connections. For more informati on, see *Using the Amazon RDS Data API*.	Using the Amazon CLI, run `create-db-cluster` and set the `--enable-http-endp oint | --no-enable-http-endpoint` option. Using the RDS API, call `CreateDBCluster` and set the `EnableHttpEndpoint` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Engine type	Choose the database engine to be used for this DB cluster.	Using the Amazon CLI, run `create-db-cluster` and set the `--engine` option. Using the RDS API, call `CreateDBCluster` and set the `Engine` parameter.
Engine version	Applies only to the provisioned capacity type. Choose the version number of your DB engine.	Using the Amazon CLI, run `create-db-cluster` and set the `--engine-version` option. Using the RDS API, call `CreateDBCluster` and set the `EngineVersion` parameter.
Failover priority	Choose a failover priority for the instance. If you don't choose a value, the default is **tier-1**. This priority determines the order in which Aurora Replicas are promoted when recovering from a primary instance failure. For more information, see Fault tolerance for an Aurora DB cluster.	Set this value for every DB instance in your Aurora cluster. Using the Amazon CLI, run `create-db-instance` and set the `--promotion-tier` option. Using the RDS API, call `CreateDBInstance` and set the `PromotionTier` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Initial database name	Enter a name for your default database. If you don't provide a name for an Aurora MySQL DB cluster, Amazon RDS doesn't create a database on the DB cluster you are creating. If you don't provide a name for an Aurora PostgreSQL DB cluster, Amazon RDS creates a database named `postgres`. For Aurora MySQL, the default database name has these constraints: • It must contain 1–64 alphanumeric characters. • It can't be a word reserved by the database engine. For Aurora PostgreSQL, the default database name has these constraints: • It must contain 1–63 alphanumeric characters. • It must begin with a letter. Subsequent characters can be letters, underscores, or digits (0–9). • It can't be a word reserved by the database engine.	Using the Amazon CLI, run `create-db-cluster` and set the `--database-name` option. Using the RDS API, call `CreateDBCluster` and set the `DatabaseName` parameter.

Console setting	Setting description	CLI option and RDS API parameter
	To create additional databases , connect to the DB cluster and use the SQL command CREATE DATABASE. For more informati on about connecting to the DB cluster, see Connecting to an Amazon Aurora DB cluster.	
Log exports	In the **Log exports** section, choose the logs that you want to start publishing to Amazon CloudWatch Logs. For more information about publishing Aurora MySQL logs to CloudWatc h Logs, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs. For more information about publishin g Aurora PostgreSQL logs to CloudWatch Logs, see Publishin g Aurora PostgreSQL logs to Amazon CloudWatch Logs.	Using the Amazon CLI, run `create-db-cluster` and set the `--enable-cloudwatch-logs-exports` option. Using the RDS API, call `CreateDBCluster` and set the `EnableCloudwatchLo gsExports` parameter.
Maintenance window	Choose **Select window** and specify the weekly time range during which system maintenan ce can occur. Or choose **No preference** for Amazon RDS to assign a period randomly.	Using the Amazon CLI, run `create-db-cluster` and set the `--preferred-mainte nance-window` option. Using the RDS API, call `CreateDBCluster` and set the `PreferredMaintenan ceWindow` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Manage master credentials in Amazon Secrets Manager	Select **Manage master credentials in Amazon Secrets Manager** to manage the master user password in a secret in Secrets Manager. Optionally, choose a KMS key to use to protect the secret. Choose from the KMS keys in your account, or enter the key from a different account. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager.	Using the Amazon CLI, run `create-db-cluster` and set the `--manage-master-user-password | --no-manage-master-user-password` and `--master-user-secret-kms-key-id` options. Using the RDS API, call `CreateDBCluster` and set the `ManageMasterUserPassword` and `MasterUserSecretKmsKeyId` parameters.
Master password	Enter a password to log on to your DB cluster: • For Aurora MySQL, the password must contain 8–41 printable ASCII characters. • For Aurora PostgreSQL, it must contain 8–99 printable ASCII characters. • It can't contain `/`, `'`, `@`, or a space.	Using the Amazon CLI, run `create-db-cluster` and set the `--master-user-password` option. Using the RDS API, call `CreateDBCluster` and set the `MasterUserPassword` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Master username	Enter a name to use as the master user name to log on to your DB cluster: • For Aurora MySQL, the name must contain 1–16 alphanumeric characters. • For Aurora PostgreSQL, it must contain 1–63 alphanumeric characters. • The first character must be a letter. • The name can't be a word reserved by the database engine. You can't change the master user name after the DB cluster is created.	Using the Amazon CLI, run `create-db-cluster` and set the `--master-username` option. Using the RDS API, call `CreateDBCluster` and set the `MasterUsername` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Multi-AZ deployment	Applies only to the provisioned capacity type. Determine if you want to create Aurora Replicas in other Availability Zones for failover support. If you choose **Create Replica in Different Zone**, then Amazon RDS creates an Aurora Replica for you in your DB cluster in a different Availability Zone than the primary instance for your DB cluster. For more information about multiple Availability Zones, see Regions and Availability Zones.	Using the Amazon CLI, run `create-db-cluster` and set the `--availability-zones` option. Using the RDS API, call `CreateDBCluster` and set the `AvailabilityZones` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Network type	The IP addressing protocols supported by the DB cluster. **IPv4** to specify that resources can communicate with the DB cluster only over the IPv4 addressing protocol. **Dual-stack mode** to specify that resources can communicate with the DB cluster over IPv4, IPv6, or both. Use dual-stack mode if you have any resources that must communicate with your DB cluster over the IPv6 addressing protocol. To use dual-stack mode, make sure at least two subnets spanning two Availability Zones that support both the IPv4 and IPv6 network protocol. Also, make sure you associate an IPv6 CIDR block with subnets in the DB subnet group you specify. For more information, see Amazon Aurora IP addressing.	Using the Amazon CLI, run `create-db-cluster` and set the `-network-type` option. Using the RDS API, call `CreateDBCluster` and set the `NetworkType` parameter.

Console setting	Setting description	CLI option and RDS API parameter
Public access	Choose **Publicly accessible** to give the DB cluster a public IP address, or choose **Not publicly accessible**. The instances in your DB cluster can be a mix of both public and private DB instances . For more information about hiding instances from public access, see Hiding a DB cluster in a VPC from the internet. To connect to a DB instance from outside of its Amazon VPC, the DB instance must be publicly accessible, access must be granted using the inbound rules of the DB instance's security group, and other requirements must be met. For more information, see Can't connect to Amazon RDS DB instance. If your DB instance is isn't publicly accessible, you can also use an Amazon Site-to-Site VPN connection or an Amazon Direct Connect connection to access it from a private network. For more information, see Internetwork traffic privacy.	Set this value for every DB instance in your Aurora cluster. Using the Amazon CLI, run `create-db-instance` and set the `--publicly-accessible | --no-publicly-accessible` option. Using the RDS API, call `CreateDBInstance` and set the `PubliclyAccessible` parameter.

Console setting	Setting description	CLI option and RDS API parameter
RDS Extended Support	Select **Enable RDS Extended Support** to allow supported major engine versions to continue running past the Aurora end of standard support date. When you create a DB cluster, Amazon Aurora defaults to RDS Extended Support. To prevent the creation of a new DB cluster after the Aurora end of standard support date and to avoid charges for RDS Extended Support, disable this setting. Your existing DB clusters won't incur charges until the RDS Extended Support pricing start date. For more information, see Amazon RDS Extended Support with Amazon Aurora.	Using the Amazon CLI, run `create-db-cluster` and set the `--engine-lifecycle-support` option. Using the RDS API, call `CreateDBCluster` and set the `EngineLifecycleSupport` parameter.
RDS Proxy	Choose **Create an RDS Proxy** to create a proxy for your DB cluster. Amazon RDS automatic ally creates an IAM role and a Secrets Manager secret for the proxy. For more information, see Amazon RDS Proxy for Aurora.	Not available when creating a DB cluster.

Console setting	Setting description	CLI option and RDS API parameter
Retention period	Choose the length of time, from 1 to 35 days, that Aurora retains backup copies of the database. Backup copies can be used for point-in-time restores (PITR) of your database down to the second.	Using the Amazon CLI, run `create-db-cluster` and set the `--backup-retention-period` option. Using the RDS API, call `CreateDBCluster` and set the `BackupRetentionPeriod` parameter.
Turn on DevOps Guru	Choose **Turn on DevOps Guru** to turn on Amazon DevOps Guru for your Aurora database. For DevOps Guru for RDS to provide detailed analysis of performance anomalies, Performance Insights must be turned on. For more information, see Setting up DevOps Guru for RDS.	You can turn on DevOps Guru for RDS from within the RDS console, but not by using the RDS API or CLI. For more information about turning on DevOps Guru, see the *Amazon DevOps Guru User Guide*.

Console setting	Setting description	CLI option and RDS API parameter
Turn on Performance Insights	Choose **Turn on Performance Insights** to turn on Amazon RDS Performance Insights. For more information, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.	Set these values for every DB instance in your Aurora cluster. Using the Amazon CLI, run `create-db-instance` and set the `--enable-performance-insights | --no-enable-performance-insights`, `--performance-insights-kms-key-id`, and `--performance-insights-retention-period` options. Using the RDS API, call `CreateDBInstance` and set the `EnablePerformanceInsights`, `PerformanceInsightsKMSKeyId`, and `PerformanceInsightsRetentionPeriod` parameters.
Virtual Private Cloud (VPC)	Choose the VPC to host the DB cluster. Choose **Create a New VPC** to have Amazon RDS create a VPC for you. For more information, see DB cluster prerequisites.	For the Amazon CLI and API, you specify the VPC security group IDs.

Console setting	Setting description	CLI option and RDS API parameter
VPC security group (firewall)	Choose **Create new** to have Amazon RDS create a VPC security group for you. Or choose **Choose existing** and specify one or more VPC security groups to secure network access to the DB cluster. When you choose **Create new** in the RDS console, a new security group is created with an inbound rule that allows access to the DB instance from the IP address detected in your browser. For more information, see DB cluster prerequisites.	Using the Amazon CLI, run `create-db-cluster` and set the `--vpc-security-group-ids` option. Using the RDS API, call `CreateDBCluster` and set the `VpcSecurityGroupIds` parameter.

Settings that don't apply to Amazon Aurora for DB clusters

The following settings in the Amazon CLI command `create-db-cluster` and the RDS API operation `CreateDBCluster` don't apply to Amazon Aurora DB clusters.

> **Note**
>
> The Amazon Web Services Management Console doesn't show these settings for Aurora DB clusters.

Amazon CLI setting	RDS API setting
`--allocated-storage`	`AllocatedStorage`
`--auto-minor-version-upgrade | --no-auto-minor-version-upgrade`	`AutoMinorVersionUpgrade`

Amazon CLI setting	RDS API setting
`--db-cluster-instance-class`	`DBClusterInstanceClass`
`--enable-performance-insights | --no-enable-performance-insights`	`EnablePerformanceInsights`
`--iops`	`Iops`
`--monitoring-interval`	`MonitoringInterval`
`--monitoring-role-arn`	`MonitoringRoleArn`
`--option-group-name`	`OptionGroupName`
`--performance-insights-kms-key-id`	`PerformanceInsightsKMSKeyId`
`--performance-insights-retention-period`	`PerformanceInsightsRetentionPeriod`
`--publicly-accessible | --no-publicly-accessible`	`PubliclyAccessible`

Settings that don't apply to Amazon Aurora DB instances

The following settings in the Amazon CLI command `create-db-instance` and the RDS API operation `CreateDBInstance` don't apply to DB instances Amazon Aurora DB cluster.

> **Note**
>
> The Amazon Web Services Management Console doesn't show these settings for Aurora DB instances.

Amazon CLI setting	RDS API setting
`--allocated-storage`	`AllocatedStorage`

Amazon CLI setting	RDS API setting
--availability-zone	AvailabilityZone
--backup-retention-period	BackupRetentionPeriod
--backup-target	BackupTarget
--character-set-name	CharacterSetName
--character-set-name	CharacterSetName
--custom-iam-instance-profile	CustomIamInstanceProfile
--db-security-groups	DBSecurityGroups
--deletion-protection | --no-deletion-protection	DeletionProtection
--domain	Domain
--domain-iam-role-name	DomainIAMRoleName
--enable-cloudwatch-logs-exports	EnableCloudwatchLogsExports
--enable-customer-owned-ip | --no-enable-customer-owned-ip	EnableCustomerOwnedIp
--enable-iam-database-authentication | --no-enable-iam-database-authentication	EnableIAMDatabaseAuthentication
--engine-version	EngineVersion
--iops	Iops
--kms-key-id	KmsKeyId
--master-username	MasterUsername
--master-user-password	MasterUserPassword

Amazon CLI setting	RDS API setting
--max-allocated-storage	MaxAllocatedStorage
--multi-az | --no-multi-az	MultiAZ
--nchar-character-set-name	NcharCharacterSetName
--network-type	NetworkType
--option-group-name	OptionGroupName
--preferred-backup-window	PreferredBackupWindow
--processor-features	ProcessorFeatures
--storage-encrypted | --no-storage-encrypted	StorageEncrypted
--storage-type	StorageType
--tde-credential-arn	TdeCredentialArn
--tde-credential-password	TdeCredentialPassword
--timezone	Timezone
--vpc-security-group-ids	VpcSecurityGroupIds

Creating Amazon Aurora resources with Amazon CloudFormation

Amazon Aurora is integrated with Amazon CloudFormation, a service that helps you to model and set up your Amazon resources so that you can spend less time creating and managing your resources and infrastructure. You create a template that describes all the Amazon resources that you want (such as DB clusters and DB cluster parameter groups), and Amazon CloudFormation provisions and configures those resources for you.

When you use Amazon CloudFormation, you can reuse your template to set up your Aurora resources consistently and repeatedly. Describe your resources once, and then provision the same resources over and over in multiple Amazon accounts and Regions.

Aurora and Amazon CloudFormation templates

Amazon CloudFormation templates are formatted text files in JSON or YAML. These templates describe the resources that you want to provision in your Amazon CloudFormation stacks. If you're unfamiliar with JSON or YAML, you can use Amazon CloudFormation Designer to help you get started with Amazon CloudFormation templates. For more information, see What is Amazon CloudFormation Designer? in the *Amazon CloudFormation User Guide*.

Aurora supports creating resources in Amazon CloudFormation. For more information, including examples of JSON and YAML templates for these resources, see the RDS resource type reference in the *Amazon CloudFormation User Guide*.

Learn more about Amazon CloudFormation

To learn more about Amazon CloudFormation, see the following resources:

- Amazon CloudFormation
- Amazon CloudFormation User Guide
- Amazon CloudFormation API Reference
- Amazon CloudFormation Command Line Interface User Guide

Connecting to an Amazon Aurora DB cluster

You can connect to an Aurora DB cluster using the same tools that you use to connect to a MySQL or PostgreSQL database. You specify a connection string with any script, utility, or application that connects to a MySQL or PostgreSQL DB instance. You use the same public key for Secure Sockets Layer (SSL) connections.

In the connection string, you typically use the host and port information from special endpoints associated with the DB cluster. With these endpoints, you can use the same connection parameters regardless of how many DB instances are in the cluster. You also use the host and port information from a specific DB instance in your Aurora DB cluster for specialized tasks, such as troubleshooting.

> **Note**
>
> For Aurora Serverless DB clusters, you connect to the database endpoint rather than to the DB instance. You can find the database endpoint for an Aurora Serverless DB cluster on the **Connectivity & security** tab of the Amazon Web Services Management Console. .

Regardless of the Aurora DB engine and specific tools you use to work with the DB cluster or instance, the endpoint must be accessible. An Aurora DB cluster can be created only in a virtual private cloud (VPC) based on the Amazon VPC service. That means that you access the endpoint from either inside the VPC or outside the VPC using one of the following approaches.

- **Access the Aurora DB cluster inside the VPC** – Enable access to the Aurora DB cluster through the VPC. You do so by editing the Inbound rules on the Security group for the VPC to allow access to your specific Aurora DB cluster. To learn more, including how to configure your VPC for different Aurora DB cluster scenarios, see Amazon Virtual Private Cloud VPCs and Amazon Aurora.
- **Access the Aurora DB cluster outside the VPC** – To access an Aurora DB cluster from outside the VPC, use the public endpoint address of the DB cluster.

For more information, see Troubleshooting Aurora connection failures.

Contents

- Connecting to Aurora DB clusters with the Amazon drivers
- Connecting to an Amazon Aurora MySQL DB cluster

- Connection utilities for Aurora MySQL
- Connecting to Aurora MySQL with the MySQL utility
- Connecting to Aurora MySQL with the Amazon Web Services (Amazon) JDBC Driver
- Connecting to Aurora MySQL with the Amazon Web Services (Amazon) Python Driver
- Connecting to Aurora MySQL with the Amazon Web Services (Amazon) ODBC Driver for MySQL
- Connecting to Aurora MySQL with the Amazon Web Services (Amazon) Advanced NodeJS Wrapper
- Connecting to Aurora MySQL with the Amazon Advanced Ruby Driver Wrapper
- Connecting to Aurora MySQL using SSL
- Connecting to an Amazon Aurora PostgreSQL DB cluster
  - Connection utilities for Aurora PostgreSQL
  - Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) JDBC Driver
  - Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) Python Driver
  - Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) Advanced NodeJS Wrapper
  - Connecting to Aurora PostgreSQL with the Amazon Advanced Ruby Driver Wrapper
- Troubleshooting Aurora connection failures

Connecting to Aurora DB clusters with the Amazon drivers

The Amazon suite of drivers has been designed to provide support for faster switchover and failover times, and authentication with Amazon Secrets Manager, Amazon Identity and Access Management (IAM), and Federated Identity. The Amazon drivers rely on monitoring DB cluster status and being aware of the cluster topology to determine the new writer. This approach reduces switchover and failover times to single-digit seconds, compared to tens of seconds for open-source drivers.

The following table lists the features supported for each of the drivers. As new service features are introduced, the goal of the Amazon suite of drivers is to have built-in support for these service features.

Feature	Amazon JDBC Driver	Amazon Python Driver	Amazon ODBC Driver for MySQL	Amazon Advanced NodeJS Wrapper	Amazon Advanced Ruby Driver Wrapper
Failover support	Yes	Yes	Yes	Yes	Yes
Enhanced failover monitoring	Yes	Yes	Yes	Yes	No
Read/write splitting support	Yes	Yes	No	Yes	No
Aurora connection tracker	Yes	Yes	No	Yes	No
Driver metadata connection	Yes	N/A	N/A	N/A	N/A
Telemetry	Yes	Yes	No	Yes	No
Secrets Manager	Yes	Yes	Yes	Yes	Yes
IAM authentication	Yes	Yes	Yes	Yes	Yes
Federated Identity (ADFS)	Yes	Yes	No	Yes	No

Feature	Amazon JDBC Driver	Amazon Python Driver	Amazon ODBC Driver for MySQL	Amazon Advanced NodeJS Wrapper	Amazon Advanced Ruby Driver Wrapper
Federated Identity (Okta)	Yes	Yes	Yes	Yes	No
Aurora PostgreSQL Limitless Database	Yes (Aurora PostgreSQL only)	No	No	Yes (Aurora PostgreSQL only)	No
Custom endpoint support	Yes	Yes	Yes	Yes	Yes
Aurora initial connection strategy	Yes	Yes	No	Yes	Yes
Blue/Green Deployment support	Yes	Yes	No	Yes	Yes
Global Database (GDB) failover support	Yes	Yes	No	Yes	Yes
KMS Encryption support	Yes	No	No	No	Yes

Feature	Amazon JDBC Driver	Amazon Python Driver	Amazon ODBC Driver for MySQL	Amazon Advanced NodeJS Wrapper	Amazon Advanced Ruby Driver Wrapper
Remote query cache support	Yes	No	No	No	No

For more information on the Amazon drivers, see the corresponding language driver for your Aurora MySQL or Aurora PostgreSQL DB cluster.

Connecting to an Amazon Aurora MySQL DB cluster

To authenticate to your Aurora MySQL DB cluster, you can use either MySQL user name and password authentication or Amazon Identity and Access Management (IAM) database authentication. For more information on using MySQL user name and password authentication, see Access control and account management in the MySQL documentation. For more information on using IAM database authentication, see IAM database authentication .

When you have a connection to your Amazon Aurora DB cluster with MySQL 8.0 compatibility, you can run SQL commands that are compatible with MySQL version 8.0. The minimum compatible version is MySQL 8.0.23. For more information about MySQL 8.0 SQL syntax, see the MySQL 8.0 reference manual. For information about limitations that apply to Aurora MySQL version 3, see Comparing Aurora MySQL version 3 and MySQL 8.0 Community Edition.

When you have a connection to your Amazon Aurora DB cluster with MySQL 5.7 compatibility, you can run SQL commands that are compatible with MySQL version 5.7. For more information about MySQL 5.7 SQL syntax, see the MySQL 5.7 reference manual. For information about limitations that apply to Aurora MySQL 5.7, see Aurora MySQL version 2 compatible with MySQL 5.7.


> **Note**
>
> For a helpful and detailed guide on connecting to an Amazon Aurora MySQL DB cluster, you can see the Aurora connection management handbook.

In the details view for your DB cluster, you can find the cluster endpoint, which you can use in your MySQL connection string. The endpoint is made up of the domain name and port for your DB cluster. For example, if an endpoint value is `mycluster.cluster-123456789012.us-east-1.rds.amazonaws.com:3306`, then you specify the following values in a MySQL connection string:

- For host or host name, specify `mycluster.cluster-123456789012.us-east-1.rds.amazonaws.com`
- For port, specify `3306` or the port value you used when you created the DB cluster

The cluster endpoint connects you to the primary instance for the DB cluster. You can perform both read and write operations using the cluster endpoint. Your DB cluster can also have up to 15 Aurora Replicas that support read-only access to the data in your DB cluster. The primary instance and each Aurora Replica has a unique endpoint that is independent of the cluster endpoint and allows you to connect to a specific DB instance in the cluster directly. The cluster endpoint always points to the primary instance. If the primary instance fails and is replaced, then the cluster endpoint points to the new primary instance.

To view the cluster endpoint (writer endpoint), choose **Databases** on the Amazon RDS console and choose the name of the DB cluster to show the DB cluster details.

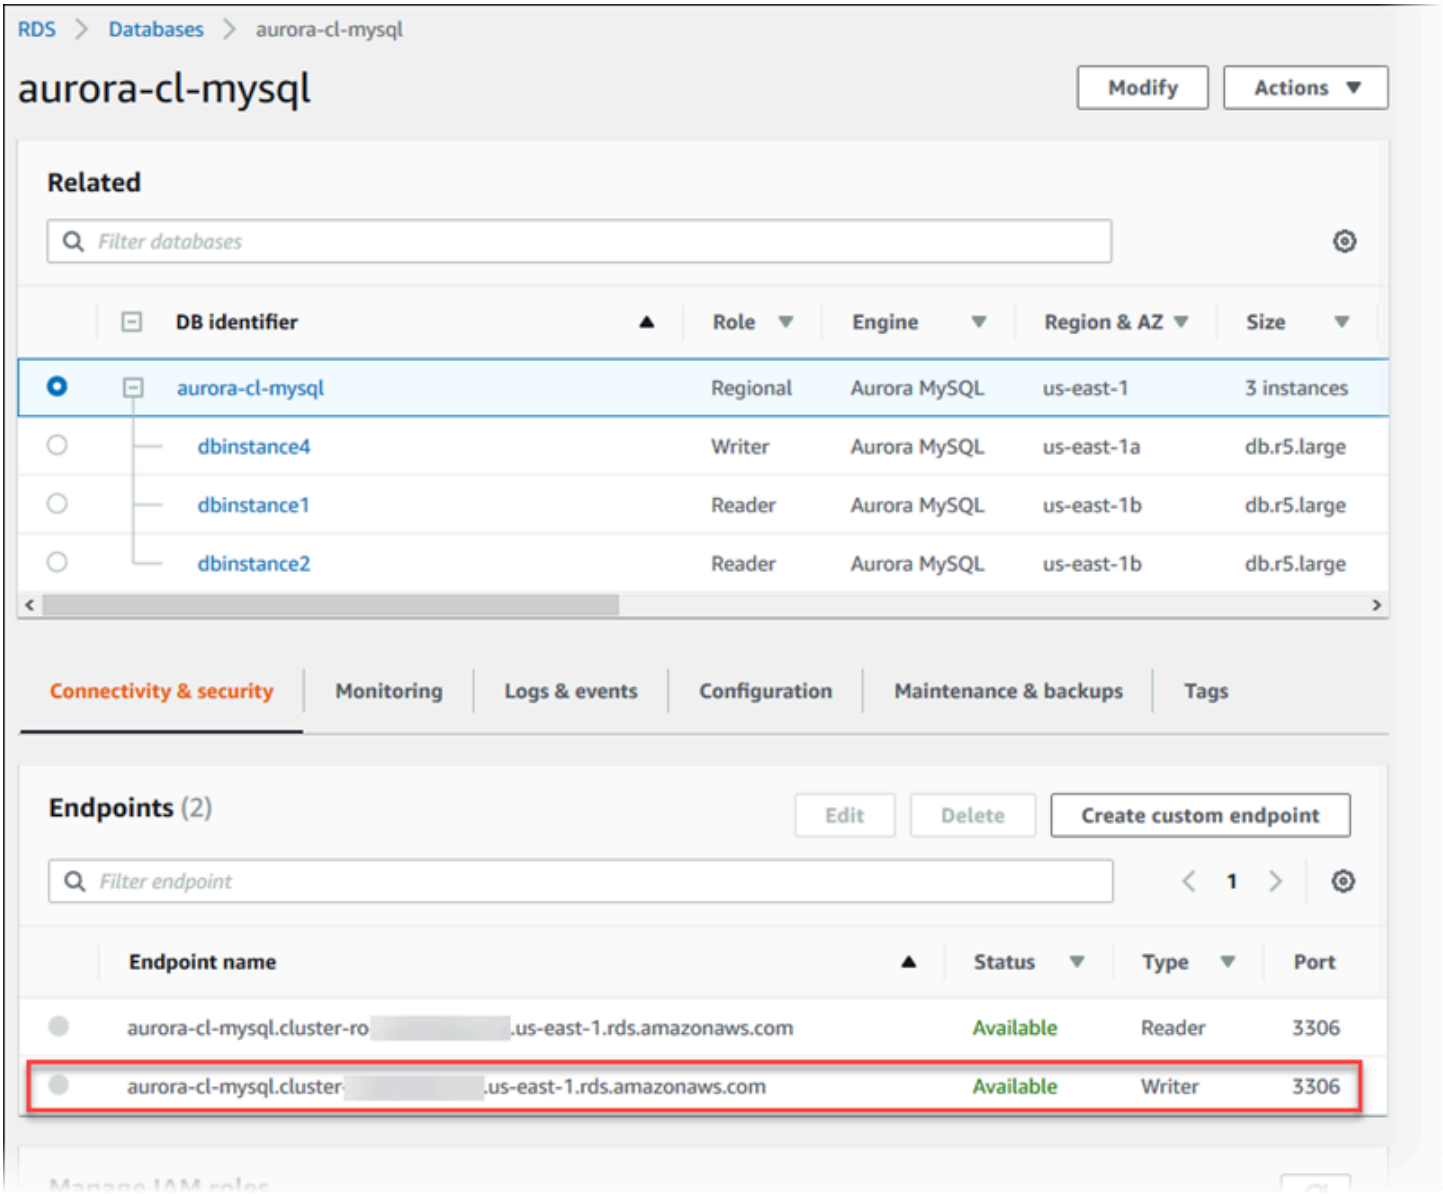

Topics

- Connection utilities for Aurora MySQL
- Connecting to Aurora MySQL with the MySQL utility
- Connecting to Aurora MySQL with the Amazon Web Services (Amazon) JDBC Driver
- Connecting to Aurora MySQL with the Amazon Web Services (Amazon) Python Driver
- Connecting to Aurora MySQL with the Amazon Web Services (Amazon) ODBC Driver for MySQL
- Connecting to Aurora MySQL with the Amazon Web Services (Amazon) Advanced NodeJS Wrapper
- Connecting to Aurora MySQL with the Amazon Advanced Ruby Driver Wrapper

- Connecting to Aurora MySQL using SSL

Connection utilities for Aurora MySQL

Some connection utilities you can use are the following:

- **Command line** – You can connect to an Amazon Aurora DB cluster by using tools like the MySQL command line utility. For more information on using the MySQL utility, see mysql — the MySQL command-line client in the MySQL documentation.
- **GUI** – You can use the MySQL Workbench utility to connect by using a UI interface. For more information, see the Download MySQL workbench page.
- **Amazon drivers**:
  - Connecting to Aurora MySQL with the Amazon Web Services (Amazon) JDBC Driver
  - Connecting to Aurora MySQL with the Amazon Web Services (Amazon) Python Driver
  - Connecting to Aurora MySQL with the Amazon Web Services (Amazon) ODBC Driver for MySQL
  - Connecting to Aurora MySQL with the Amazon Web Services (Amazon) Advanced NodeJS Wrapper
  - Connecting to Aurora MySQL with the Amazon Advanced Ruby Driver Wrapper

Connecting to Aurora MySQL with the MySQL utility

Use the following procedure. It assumes that you configured your DB cluster in a private subnet in your VPC. You connect using an Amazon EC2 instance that you configured according to the tutorials in Tutorial: Create a web server and an Amazon Aurora DB cluster.

> **Note**
>
> This procedure doesn't require installing the web server in the tutorial, but it does require installing MariaDB 10.5.

To connect to a DB cluster using the MySQL utility

1. Log in to the EC2 instance that you're using to connect to your DB cluster.

   You should see output similar to the following.

```
Last login: Thu Jun 23 13:32:52 2022 from xxx.xxx.xxx.xxx

       __|  __|_  )
       _|  (     /   Amazon Linux 2 AMI
      ___|\___|___|

https://aws.amazon.com/amazon-linux-2/
[ec2-user@ip-10-0-xxx.xxx ~]$
```

2. Type the following command at the command prompt to connect to the primary DB instance of your DB cluster.

   For the `-h` parameter, substitute the endpoint DNS name for your primary instance. For the `-u` parameter, substitute the user ID of a database user account.

   ```
   mysql -h primary-instance-endpoint.Amazon_account.AWS_Region.rds.amazonaws.com -P
    3306 -u database_user -p
   ```

   For example:

   ```
   mysql -h my-aurora-cluster-instance.c1xy5example.123456789012.eu-
   central-1.rds.amazonaws.com -P 3306 -u admin -p
   ```

3. Enter the password for the database user.

   You should see output similar to the following.

   ```
   Welcome to the MariaDB monitor.  Commands end with ; or \g.
   Your MySQL connection id is 1770
   Server version: 8.0.23 Source distribution

   Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

   Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

   MySQL [(none)]>
   ```

4. Enter your SQL commands.

Connecting to Aurora MySQL with the Amazon Web Services (Amazon) JDBC Driver

The Amazon Web Services (Amazon) JDBC Driver is designed as an advanced JDBC wrapper. This wrapper is complementary to and extends the functionality of an existing JDBC driver to help applications take advantage of the features of clustered databases such as Aurora MySQL. The driver is drop-in compatible with the community MySQL Connector/J driver and the community MariaDB Connector/J driver.

To install the Amazon JDBC Driver, append the Amazon JDBC Driver .jar file (located in the application `CLASSPATH`), and keep references to the respective community driver. Update the respective connection URL prefix as follows:

- `jdbc:mysql://` to `jdbc:aws-wrapper:mysql://`
- `jdbc:mariadb://` to `jdbc:aws-wrapper:mariadb://`

For more information about the Amazon JDBC Driver and complete instructions for using it, see the Amazon Web Services (Amazon) JDBC Driver GitHub repository.

> **Note**
>
> Version 3.0.3 of the MariaDB Connector/J utility drops support for Aurora DB clusters, so we highly recommend moving to the Amazon JDBC Driver.

Connecting to Aurora MySQL with the Amazon Web Services (Amazon) Python Driver

The Amazon Web Services (Amazon) Python Driver is designed as an advanced Python wrapper. This wrapper is complementary to and extends the functionality of the open-source Psycopg driver. The Amazon Python Driver supports Python versions 3.8 and higher. You can install the `aws-advanced-python-wrapper` package using the `pip` command, along with the `psycopg` open-source packages.

For more information about the Amazon Python Driver and complete instructions for using it, see the Amazon Web Services (Amazon) Python Driver GitHub repository.

Connecting to Aurora MySQL with the Amazon Web Services (Amazon) ODBC Driver for MySQL

The Amazon ODBC Driver for MySQL is a client driver designed for the high availability of Aurora MySQL. The driver can exist alongside the MySQL Connector/ODBC driver and is compatible with the same workflows.

For more information about the Amazon ODBC Driver for MySQL and complete instructions for installing and using it, see the Amazon Web Services (Amazon) ODBC Driver for MySQL GitHub repository.

Connecting to Aurora MySQL with the Amazon Web Services (Amazon) Advanced NodeJS Wrapper

The Amazon Advanced NodeJS Wrapper is complementary to and extends the functionality of an existing NodeJS driver. It helps applications take advantage of the features of clustered databases such as Aurora MySQL.

For more information about the Amazon Advanced NodeJS Wrapper and complete instructions for using it, see the Amazon Web Services (Amazon) Advanced NodeJS Wrapper GitHub repository.

Connecting to Aurora MySQL with the Amazon Advanced Ruby Driver Wrapper

The Amazon Advanced Ruby Driver Wrapper builds on top of the community mysql2 driver to help applications take advantage of the features of clustered databases such as Aurora MySQL. It integrates with ActiveRecord through the drop-in `aws_mysql2` adapter. You can install the wrapper by adding the `aws-advanced-ruby-driver-wrapper` gem to your Gemfile, along with the `mysql2` gem, and running `bundle install`.

For more information about the Amazon Advanced Ruby Driver Wrapper and complete instructions for using it, see the Amazon Advanced Ruby Driver Wrapper GitHub repository.

Connecting to Aurora MySQL using SSL

You can use SSL encryption on connections to an Aurora MySQL DB instance. For information, see TLS connections to Aurora MySQL DB clusters.

To connect using SSL, use the MySQL utility as described in the following procedure. If you are using IAM database authentication, you must use an SSL connection. For information, see IAM database authentication .

> **Note**
>
> To connect to the cluster endpoint using SSL, your client connection utility must support Subject Alternative Names (SAN). If your client connection utility doesn't support SAN, you can connect directly to the instances in your Aurora DB cluster. For more information on Aurora endpoints, see Amazon Aurora endpoint connections.

To connect to a DB cluster with SSL using the MySQL utility

1. Download the public key for the Amazon RDS signing certificate.

   For information about downloading certificates, see Using SSL/TLS to encrypt a connection to a DB cluster.

2. Type the following command at a command prompt to connect to the primary instance of a DB cluster with SSL using the MySQL utility. For the `-h` parameter, substitute the endpoint DNS name for your primary instance. For the `-u` parameter, substitute the user ID of a database user account. For the `--ssl-ca` parameter, substitute the SSL certificate file name as appropriate. Type the master user password when prompted.

   ```
   mysql -h mycluster-primary.123456789012.us-east-1.rds.amazonaws.com -u admin_user -p --ssl-ca=[full path]global-bundle.pem --ssl-verify-server-cert
   ```

You should see output similar to the following.

```
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 350
Server version: 8.0.26-log MySQL Community Server (GPL)

Type 'help;' or '\h' for help. Type '\c' to clear the buffer.

mysql>
```

For general instructions on constructing RDS for MySQL connection strings and finding the public key for SSL connections, see Connecting to a DB instance running the MySQL database engine.

Connecting to an Amazon Aurora PostgreSQL DB cluster

You can connect to a DB instance in your Amazon Aurora PostgreSQL DB cluster using the same tools that you use to connect to a PostgreSQL database. As part of this, you use the same public key for Secure Sockets Layer (SSL) connections. You can use the endpoint and port information from the primary instance or Aurora Replicas in your Aurora PostgreSQL DB cluster in the connection string of any script, utility, or application that connects to a PostgreSQL DB instance. In the connection string, specify the DNS address from the primary instance or Aurora Replica endpoint as the host parameter. Specify the port number from the endpoint as the port parameter.

When you have a connection to a DB instance in your Amazon Aurora PostgreSQL DB cluster, you can run any SQL command that is compatible with PostgreSQL.

In the details view for your Aurora PostgreSQL DB cluster you can find the cluster endpoint name, status, type, and port number. You use the endpoint and port number in your PostgreSQL connection string. For example, if an endpoint value is `mycluster.cluster-123456789012.us-east-1.rds.amazonaws.com`, then you specify the following values in a PostgreSQL connection string:

- For host or host name, specify `mycluster.cluster-123456789012.us-east-1.rds.amazonaws.com`
- For port, specify `5432` or the port value you used when you created the DB cluster

The cluster endpoint connects you to the primary instance for the DB cluster. You can perform both read and write operations using the cluster endpoint. Your DB cluster can also have up to 15 Aurora Replicas that support read-only access to the data in your DB cluster. Each DB instance in the Aurora cluster (that is, the primary instance and each Aurora Replica) has a unique endpoint that is independent of the cluster endpoint. This unique endpoint allows you to connect to a specific DB instance in the cluster directly. The cluster endpoint always points to the primary instance. If the primary instance fails and is replaced, the cluster endpoint points to the new primary instance.

To view the cluster endpoint (writer endpoint), choose **Databases** on the Amazon RDS console and choose the name of the DB cluster to show the DB cluster details.
Aurora PostgreSQL writer endpoint.

Connection utilities for Aurora PostgreSQL

Some connection utilities you can use are the following:

- **Command line** – You can connect to Aurora PostgreSQL DB clusters by using tools like psql, the PostgreSQL interactive terminal. For more information on using the PostgreSQL interactive terminal, see psql in the PostgreSQL documentation.
- **GUI** – You can use the pgAdmin utility to connect to Aurora PostgreSQL DB clusters by using a UI interface. For more information, see the Download page from the pgAdmin website.
- **Amazon drivers**:
  - Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) JDBC Driver
  - Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) Python Driver
  - Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) Advanced NodeJS Wrapper
  - Connecting to Aurora PostgreSQL with the Amazon Advanced Ruby Driver Wrapper

Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) JDBC Driver

The Amazon Web Services (Amazon) JDBC Driver is designed as an advanced JDBC wrapper. This wrapper is complementary to and extends the functionality of an existing JDBC driver to help applications take advantage of the features of clustered databases such as Aurora PostgreSQL. The driver is drop-in compatible with the community pgJDBC driver.

To install the Amazon JDBC Driver, append the Amazon JDBC Driver .jar file (located in the application CLASSPATH), and keep references to the pgJDBC community driver. Update the connection URL prefix from `jdbc:postgresql://` to `jdbc:aws-wrapper:postgresql://`.

For more information about the Amazon JDBC Driver and complete instructions for using it, see the Amazon Web Services (Amazon) JDBC Driver GitHub repository.

Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) Python Driver

The Amazon Web Services (Amazon) Python Driver is designed as an advanced Python wrapper. This wrapper is complementary to and extends the functionality of the open-source Psycopg driver. The Amazon Python Driver supports Python versions 3.8 and higher. You can install the `aws-advanced-python-wrapper` package using the `pip` command, along with the `psycopg` open-source packages.

For more information about the Amazon Python Driver and complete instructions for using it, see the Amazon Web Services (Amazon) Python Driver GitHub repository.

Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) Advanced NodeJS Wrapper

The Amazon Advanced NodeJS Wrapper is complementary to and extends the functionality of an existing NodeJS driver. It helps applications take advantage of the features of clustered databases such as Aurora PostgreSQL.

For more information about the Amazon Advanced NodeJS Wrapper and complete instructions for using it, see the Amazon Web Services (Amazon) Advanced NodeJS Wrapper GitHub repository.

Connecting to Aurora PostgreSQL with the Amazon Advanced Ruby Driver Wrapper

The Amazon Advanced Ruby Driver Wrapper builds on top of the community pg driver to help applications take advantage of the features of clustered databases such as Aurora PostgreSQL. It integrates with ActiveRecord through the drop-in `aws_postgresql` adapter. You can install the wrapper by adding the `aws-advanced-ruby-driver-wrapper` gem to your Gemfile, along with the pg gem, and running `bundle install`.

For more information about the Amazon Advanced Ruby Driver Wrapper and complete instructions for using it, see the Amazon Advanced Ruby Driver Wrapper GitHub repository.

Troubleshooting Aurora connection failures

Common causes of connection failures to a new Aurora DB cluster include the following:

- **Security group in the VPC doesn't allow access** – Your VPC needs to allow connections from your device or from an Amazon EC2 instance by proper configuration of the security group in the VPC. To resolve, modify your VPC's Security group Inbound rules to allow connections. For an example, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only).
- **Port blocked by firewall rules** – Check the value of the port configured for your Aurora DB cluster. If a firewall rule blocks that port, you can re-create the instance using a different port.
- **Incomplete or incorrect IAM configuration** – If you created your Aurora DB instance to use IAM–based authentication, make sure that it's properly configured. For more information, see IAM database authentication .

For more information about troubleshooting Aurora DB connection issues, see Can't connect to Amazon RDS DB instance.

Parameter groups for Amazon Aurora

Database parameters specify how the database is configured. For example, database parameters can specify the amount of resources, such as memory, to allocate to a database.

You manage your database configuration by associating your DB instances and Aurora DB clusters with parameter groups. Aurora defines parameter groups with default settings. You can also define your own parameter groups with customized settings.

Topics

- Overview of parameter groups
- DB cluster parameter groups for Amazon Aurora DB clusters
- DB parameter groups for Amazon Aurora DB instances
- Comparing DB parameter groups
- Specifying DB parameters

Overview of parameter groups

A *DB cluster parameter group* acts as a container for engine configuration values that apply to every DB instance in an Aurora DB cluster. For example, the Aurora shared storage model requires that every DB instance in an Aurora cluster use the same setting for parameters such as `innodb_file_per_table`. Thus, parameters that affect the physical storage layout are part of the cluster parameter group. The DB cluster parameter group also includes default values for all instance-level parameters.

A *DB parameter group* acts as a container for engine configuration values that are applied to one or more DB instances. DB parameter groups apply to DB instances in both Amazon RDS and Aurora. These configuration settings apply to properties that can vary among the DB instances within an Aurora cluster, such as the sizes for memory buffers.

Topics

- Default and custom parameter groups
- Static and dynamic DB cluster parameters
- Static and dynamic DB instance parameters

- Character set parameters
- Supported parameters and parameter values

Default and custom parameter groups

If you create a DB instance without specifying a DB parameter group, the DB instance uses a default DB parameter group. Likewise, if you create an Aurora DB cluster without specifying a DB cluster parameter group, the DB cluster uses a default DB cluster parameter group. Each default parameter group contains database engine defaults and Amazon RDS system defaults based on the engine, compute class, and allocated storage of the instance.

You can't modify the parameter settings of a default parameter group. Instead, you can do the following:

1. Create a new parameter group.
2. Change the settings of your desired parameters. Not all DB engine parameters in a parameter group are eligible to be modified.
3. Modify your DB instance or DB cluster to associate the new parameter group.

   For information about modifying a DB cluster or DB instance, see Modifying an Amazon Aurora DB cluster.

   > **Note**
   >
   > If you have modified your DB instance to use a custom parameter group, and you start the DB instance, RDS automatically reboots the DB instance as part of the startup process. For RDS for SQL Server Multi-AZ instances with AlwaysOn or Mirroring option enabled, a failover is expected when instance is rebooted after the startup process.

RDS applies the modified static and dynamic parameters in a newly associated parameter group only after the DB instance is rebooted. However, if you modify dynamic parameters in the DB parameter group after you associate it with the DB instance, these changes are applied immediately without a reboot. For more information about changing the DB parameter group, see Modifying an Amazon Aurora DB cluster.

If you update parameters within a DB parameter group, the changes apply to all DB instances that are associated with that parameter group. Likewise, if you update parameters within an Aurora DB

cluster parameter group, the changes apply to all Aurora DB clusters that are associated with that DB cluster parameter group.

If you don't want to create a parameter group from scratch, you can copy an existing parameter group with the Amazon CLI copy-db-parameter-group command or copy-db-cluster-parameter-group command. You might find that copying a parameter group is useful in some cases. For example, you might want to include most of an existing parameter group's custom parameters and values in a new parameter group.

Static and dynamic DB cluster parameters

DB cluster parameters are either static or dynamic. They differ in the following ways:

- When you change a static parameter and save the DB cluster parameter group, the parameter change takes effect after you manually reboot the DB instances in each associated DB cluster. When you use the Amazon Web Services Management Console to change static DB cluster parameter values, it always uses `pending-reboot` for the `ApplyMethod`.
- When you change a dynamic parameter, by default the parameter change takes effect immediately, without requiring a reboot. When you use the console, it always uses `immediate` for the `ApplyMethod`. To defer the parameter change until after you reboot the DB instances in an associated DB cluster, use the Amazon CLI or RDS API. Set the `ApplyMethod` to `pending-reboot` for the parameter change.

For more information about using the Amazon CLI to change a parameter value, see modify-db-cluster-parameter-group. For more information about using the RDS API to change a parameter value, see ModifyDBClusterParameterGroup.

If you change the DB cluster parameter group associated with a DB cluster, reboot the DB instances in the DB cluster. The reboot applies the changes to all DB instances in the DB cluster. To determine whether the DB instances of a DB cluster must be rebooted to apply changes, run the following Amazon CLI command.

```
aws rds describe-db-clusters --db-cluster-identifier db_cluster_identifier
```

Check the `DBClusterParameterGroupStatus` value for the primary DB instance in the output. If the value is `pending-reboot`, then reboot the DB instances of the DB cluster.

Static and dynamic DB instance parameters

DB instance parameters are either static or dynamic. They differ as follows:

- When you change a static parameter and save the DB parameter group, the parameter change takes effect after you manually reboot the associated DB instances. For static parameters, the console always uses `pending-reboot` for the `ApplyMethod`.
- When you change a dynamic parameter, by default the parameter change takes effect immediately, without requiring a reboot. When you use the Amazon Web Services Management Console to change DB instance parameter values, it always uses `immediate` for the `ApplyMethod` for dynamic parameters. To defer the parameter change until after you reboot an associated DB instance, use the Amazon CLI or RDS API. Set the `ApplyMethod` to `pending-reboot` for the parameter change.

For more information about using the Amazon CLI to change a parameter value, see modify-db-parameter-group. For more information about using the RDS API to change a parameter value, see ModifyDBParameterGroup.

If a DB instance isn't using the latest changes to its associated DB parameter group, the console shows a status of **pending-reboot** for the DB parameter group. This status doesn't result in an automatic reboot during the next maintenance window. To apply the latest parameter changes to that DB instance, manually reboot the DB instance.

Character set parameters

Before you create a DB cluster, set any parameters that relate to the character set or collation of your database in your parameter group. Also do so before you create a database in it. In this way, you ensure that the default database and new databases use the character set and collation values that you specify. If you change character set or collation parameters, the parameter changes aren't applied to existing databases.

For some DB engines, you can change character set or collation values for an existing database using the `ALTER DATABASE` command, for example:

```
ALTER DATABASE database_name CHARACTER SET character_set_name COLLATE collation;
```

For more information about changing the character set or collation values for a database, check the documentation for your DB engine.

Supported parameters and parameter values

To determine the supported parameters for your DB engine, view the parameters in the DB parameter group and DB cluster parameter group used by the DB instance or DB cluster. For more

information, see Viewing parameter values for a DB parameter group in Amazon Aurora and Viewing parameter values for a DB cluster parameter groupin Amazon Aurora.

In many cases, you can specify integer and Boolean parameter values using expressions, formulas, and functions. Functions can include a mathematical log expression. However, not all parameters support expressions, formulas, and functions for parameter values. For more information, see Specifying DB parameters.

For an Aurora global database, you can specify different configuration settings for the individual Aurora clusters. Make sure that the settings are similar enough to produce consistent behavior if you promote a secondary cluster to be the primary cluster. For example, use the same settings for time zones and character sets across all the clusters of an Aurora global database.

Improperly setting parameters in a parameter group can have unintended adverse effects, including degraded performance and system instability. Always be cautious when modifying database parameters, and back up your data before modifying a parameter group. Try parameter group setting changes on a test DB instance or DB cluster before applying those parameter group changes to a production DB instance or DB cluster.

DB cluster parameter groups for Amazon Aurora DB clusters

Amazon Aurora DB clusters use DB cluster parameter groups. The following sections describe configuring and managing DB cluster parameter groups.

Topics

- Amazon Aurora DB cluster and DB instance parameters
- Creating a DB cluster parameter groupin Amazon Aurora
- Associating a DB cluster parameter group with a DB cluster in Amazon Aurora
- Modifying parameters in a DB cluster parameter groupin Amazon Aurora
- Resetting parameters in a DB cluster parameter groupin Amazon Aurora
- Copying a DB cluster parameter groupin Amazon Aurora
- Listing DB cluster parameter groupsin Amazon Aurora
- Viewing parameter values for a DB cluster parameter groupin Amazon Aurora
- Deleting a DB cluster parameter groupin Amazon Aurora

Amazon Aurora DB cluster and DB instance parameters

Aurora uses a two-level system of configuration settings:

- Parameters in a *DB cluster parameter group* apply to every DB instance in a DB cluster. Your data is stored in the Aurora shared storage subsystem. Because of this, all parameters related to physical layout of table data must be the same for all DB instances in an Aurora cluster. Likewise, because Aurora DB instances are connected by replication, all the parameters for replication settings must be identical throughout an Aurora cluster.
- Parameters in a *DB parameter group* apply to a single DB instance in an Aurora DB cluster. These parameters are related to aspects such as memory usage that you can vary across DB instances in the same Aurora cluster. For example, a cluster often contains DB instances with different Amazon instance classes.

Every Aurora cluster is associated with a DB cluster parameter group. This parameter group assigns default values for every configuration value for the corresponding DB engine. The cluster parameter group includes defaults for both the cluster-level and instance-level parameters. Each DB instance within a provisioned or Aurora serverless cluster inherits the settings from that DB cluster parameter group.

Each DB instance is also associated with a DB parameter group. The values in the DB parameter group can override default values from the cluster parameter group. For example, if one instance in a cluster experienced issues, you might assign a custom DB parameter group to that instance. The custom parameter group might have specific settings for parameters related to debugging or performance tuning.

Aurora assigns default parameter groups when you create a cluster or a new DB instance, based on the specified database engine and version. You can specify custom parameter groups instead. You create those parameter groups yourself, and you can edit the parameter values. You can specify these custom parameter groups at creation time. You can also modify a DB cluster or instance later to use a custom parameter group.

For provisioned and Aurora serverless instances, any configuration values that you modify in the DB cluster parameter group override default values in the DB parameter group. If you edit the corresponding values in the DB parameter group, those values override the settings from the DB cluster parameter group.

Any DB parameter settings that you modify take precedence over the DB cluster parameter group values, even if you change the configuration parameters back to their default values. You can see which parameters are overridden by using the describe-db-parameters Amazon CLI command or the DescribeDBParameters RDS API operation. The `Source` field contains the value `user` if you modified that parameter. To reset one or more parameters so that the value from the DB cluster parameter group takes precedence, use the reset-db-parameter-group Amazon CLI command or the ResetDBParameterGroup RDS API operation.

The DB cluster and DB instance parameters available to you in Aurora vary depending on database engine compatibility.

Database engine	Parameters
Aurora MySQL	See Aurora MySQL configuration parameters. For Aurora Serverless clusters, see additional details in Working with parameter groups for Aurora serverless.
Aurora PostgreSQL	See Amazon Aurora PostgreSQL parameters. For Aurora Serverless clusters, see additional details in Working with parameter groups for Aurora serverless.

Note

Aurora serverless uses both DB cluster parameter groups and DB parameter groups. With Aurora serverless, you can modify almost all of the configuration parameters. Aurora serverless overrides the settings of some capacity-related configuration parameters so that your workload isn't interrupted when Aurora serverless instances scale down.
To learn more about Aurora Serverless configuration settings and which settings you can modify, see Working with parameter groups for Aurora serverless.

Creating a DB cluster parameter groupin Amazon Aurora

You can create a new DB cluster parameter group using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

After you create a DB cluster parameter group, wait at least 5 minutes before creating a DB cluster that uses that DB cluster parameter group. Doing this allows Amazon RDS to fully create the parameter group before it is used by the new DB cluster. You can use the **Parameter groups** page in the Amazon RDS console or the describe-db-cluster-parameters command to verify that your DB cluster parameter group is created.

The following limitations apply to the DB cluster parameter group name:

- The name must be 1 to 255 letters, numbers, or hyphens.

  Default parameter group names can include a period, such as `default.aurora-mysql5.7`. However, custom parameter group names can't include a period.
- The first character must be a letter.
- The name can't end with a hyphen or contain two consecutive hyphens.

Console

To create a DB cluster parameter group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. Choose **Create parameter group**.
4. For **Parameter group name**, enter the name of the new DB cluster parameter group.
5. For **Description**, enter a description for the new DB cluster parameter group.
6. For **Engine type**, choose your database engine.
7. For **Parameter group family**, choose a DB parameter group family.
8. Choose **Create**.

Amazon CLI

To create a DB cluster parameter group, use the Amazon CLI `create-db-cluster-parameter-group` command.

The following example creates a DB cluster parameter group named *mydbclusterparametergroup* for Aurora MySQL version 5.7 with a description of "*My new cluster parameter group*."

Include the following required parameters:

- `--db-cluster-parameter-group-name`
- `--db-parameter-group-family`
- `--description`

To list all of the available parameter group families, use the following command:

```
aws rds describe-db-engine-versions --query "DBEngineVersions[].DBParameterGroupFamily"
```

> **Note**
>
> The output contains duplicates.

Example

For Linux, macOS, or Unix:

```
aws rds create-db-cluster-parameter-group \
    --db-cluster-parameter-group-name mydbclusterparametergroup \
    --db-parameter-group-family aurora-mysql5.7 \
    --description "My new cluster parameter group"
```

For Windows:

```
aws rds create-db-cluster-parameter-group ^
    --db-cluster-parameter-group-name mydbclusterparametergroup ^
    --db-parameter-group-family aurora-mysql5.7 ^
    --description "My new cluster parameter group"
```

This command produces output similar to the following:

```
{
    "DBClusterParameterGroup": {
        "DBClusterParameterGroupName": "mydbclusterparametergroup",
        "DBParameterGroupFamily": "aurora-mysql5.7",
        "Description": "My new cluster parameter group",
        "DBClusterParameterGroupArn": "arn:aws:rds:us-east-1:123456789012:cluster-
pg:mydbclusterparametergroup"
```

```
    }
}
```

RDS API

To create a DB cluster parameter group, use the RDS API `CreateDBClusterParameterGroup` action.

Include the following required parameters:

- `DBClusterParameterGroupName`
- `DBParameterGroupFamily`
- `Description`

Associating a DB cluster parameter group with a DB cluster in Amazon Aurora

You can create your own DB cluster parameter groups with customized settings. You can associate a DB cluster parameter group with a DB cluster using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API. You can do so when you create or modify a DB cluster.

For information about creating a DB cluster parameter group, see Creating a DB cluster parameter groupin Amazon Aurora. For information about creating a DB cluster, see Creating an Amazon Aurora DB cluster. For information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

> **Note**
>
> For Aurora PostgreSQL 15.2, 14.7, 13.10, 12.14, and all 11 versions, when you change the DB cluster parameter group associated with a DB cluster, reboot each replica instance to apply the changes.
> To determine whether the primary DB instance of a DB cluster must be rebooted to apply changes, run the following Amazon CLI command:
> `aws rds describe-db-clusters --db-cluster-identifier` *`db_cluster_identifier`*
> Check the `DBClusterParameterGroupStatus` value for the primary DB instance in the output. If the value is `pending-reboot`, then reboot the primary DB instance of the DB cluster.

Console

To associate a DB cluster parameter group with a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then select the DB cluster that you want to modify.
3. Choose **Modify**. The **Modify DB cluster** page appears.
4. Change the **DB cluster parameter group** setting.
5. Choose **Continue** and check the summary of modifications.

   The change is applied immediately regardless of the **Scheduling of modifications** setting.
6. On the confirmation page, review your changes. If they are correct, choose **Modify cluster** to save your changes.

   Alternatively, choose **Back** to edit your changes, or choose **Cancel** to cancel your changes.

Amazon CLI

To associate a DB cluster parameter group with a DB cluster, use the Amazon CLI `modify-db-cluster` command with the following options:

- `--db-cluster-name`
- `--db-cluster-parameter-group-name`

The following example associates the `mydbclpg` DB parameter group with the `mydbcluster` DB cluster.

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbcluster \
    --db-cluster-parameter-group-name mydbclpg
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --db-cluster-parameter-group-name mydbclpg
```

RDS API

To associate a DB cluster parameter group with a DB cluster, use the RDS API `ModifyDBCluster` operation with the following parameters:

- `DBClusterIdentifier`
- `DBClusterParameterGroupName`

Modifying parameters in a DB cluster parameter groupin Amazon Aurora

You can modify parameter values in a customer-created DB cluster parameter group. You can't change the parameter values in a default DB cluster parameter group. Changes to parameters in a customer-created DB cluster parameter group are applied to all DB clusters that are associated with the DB cluster parameter group.

Console

To modify a DB cluster parameter group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. In the list, choose the parameter group that you want to modify.
4. For **Parameter group actions**, choose **Edit**.
5. Change the values of the parameters you want to modify. You can scroll through the parameters using the pagination controls.

   You can't change values in a default parameter group.
6. Choose **Save changes**.
7. Reboot the primary (writer) DB instance in the cluster to apply the changes to it.
8. Then reboot the reader DB instances to apply the changes to them.

   If you don't reboot the DB instances, then a failover operation could take longer than normal.

Amazon CLI

To modify a DB cluster parameter group, use the Amazon CLI `modify-db-cluster-parameter-group` command with the following required parameters:

- `--db-cluster-parameter-group-name`
- `--parameters`

The following example modifies the `server_audit_logging` and `server_audit_logs_upload` values in the DB cluster parameter group named *mydbclusterparametergroup*.

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
    --db-cluster-parameter-group-name mydbclusterparametergroup \
    --parameters
 "ParameterName=server_audit_logging,ParameterValue=1,ApplyMethod=immediate" \

 "ParameterName=server_audit_logs_upload,ParameterValue=1,ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
    --db-cluster-parameter-group-name mydbclusterparametergroup ^
    --parameters
 "ParameterName=server_audit_logging,ParameterValue=1,ApplyMethod=immediate" ^

 "ParameterName=server_audit_logs_upload,ParameterValue=1,ApplyMethod=immediate"
```

The command produces output like the following:

```
DBCLUSTERPARAMETERGROUP  mydbclusterparametergroup
```

RDS API

To modify a DB cluster parameter group, use the RDS API `ModifyDBClusterParameterGroup` command with the following required parameters:

- `DBClusterParameterGroupName`
- `Parameters`

Resetting parameters in a DB cluster parameter groupin Amazon Aurora

You can reset parameters to their default values in a customer-created DB cluster parameter group. Changes to parameters in a customer-created DB cluster parameter group are applied to all DB clusters that are associated with the DB cluster parameter group.

> **Note**
>
> In a default DB cluster parameter group, parameters are always set to their default values.

Console

To reset parameters in a DB cluster parameter group to their default values

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. In the list, choose the parameter group.
4. For **Parameter group actions**, choose **Edit**.
5. Choose the parameters that you want to reset to their default values. You can scroll through the parameters using the pagination controls.

   You can't reset values in a default parameter group.
6. Choose **Reset** and then confirm by choosing **Reset parameters**.
7. Reboot the primary DB instance in the DB cluster to apply the changes to all of the DB instances in the DB cluster.

Amazon CLI

To reset parameters in a DB cluster parameter group to their default values, use the Amazon CLI `reset-db-cluster-parameter-group` command with the following required option: `--db-cluster-parameter-group-name`.

To reset all of the parameters in the DB cluster parameter group, specify the `--reset-all-parameters` option. To reset specific parameters, specify the `--parameters` option.

The following example resets all of the parameters in the DB parameter group named *mydbparametergroup* to their default values.

Example

For Linux, macOS, or Unix:

```
aws rds reset-db-cluster-parameter-group \
    --db-cluster-parameter-group-name mydbparametergroup \
    --reset-all-parameters
```

For Windows:

```
aws rds reset-db-cluster-parameter-group ^
    --db-cluster-parameter-group-name mydbparametergroup ^
    --reset-all-parameters
```

The following example resets the `server_audit_logging` and `server_audit_logs_upload` to their default values in the DB cluster parameter group named *mydbclusterparametergroup*.

Example

For Linux, macOS, or Unix:

```
aws rds reset-db-cluster-parameter-group \
    --db-cluster-parameter-group-name mydbclusterparametergroup \
    --parameters "ParameterName=server_audit_logging,ApplyMethod=immediate" \
                 "ParameterName=server_audit_logs_upload,ApplyMethod=immediate"
```

For Windows:

```
aws rds reset-db-cluster-parameter-group ^
    --db-cluster-parameter-group-name mydbclusterparametergroup ^
    --parameters
 "ParameterName=server_audit_logging,ParameterValue=1,ApplyMethod=immediate" ^

 "ParameterName=server_audit_logs_upload,ParameterValue=1,ApplyMethod=immediate"
```

The command produces output like the following:

```
DBClusterParameterGroupName  mydbclusterparametergroup
```

RDS API

To reset parameters in a DB cluster parameter group to their default values, use the RDS API `ResetDBClusterParameterGroup` command with the following required parameter: `DBClusterParameterGroupName`.

To reset all of the parameters in the DB cluster parameter group, set the `ResetAllParameters` parameter to `true`. To reset specific parameters, specify the `Parameters` parameter.

Copying a DB cluster parameter groupin Amazon Aurora

You can copy custom DB cluster parameter groups that you create. Copying a parameter group is a convenient solution when you have already created a DB cluster parameter group and you want to include most of the custom parameters and values from that group in a new DB cluster parameter group. You can copy a DB cluster parameter group by using the Amazon CLI copy-db-cluster-parameter-group command or the RDS API CopyDBClusterParameterGroup operation.

After you copy a DB cluster parameter group, wait at least 5 minutes before creating a DB cluster that uses that DB cluster parameter group. Doing this allows Amazon RDS to fully copy the parameter group before it is used by the new DB cluster. You can use the **Parameter groups** page in the Amazon RDS console or the describe-db-cluster-parameters command to verify that your DB cluster parameter group is created.

> **Note**
>
> You can't copy a default parameter group. However, you can create a new parameter group that is based on a default parameter group.
> You can't copy a DB cluster parameter group to a different Amazon Web Services account or Amazon Web Services Region.

Console

To copy a DB cluster parameter group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

2. In the navigation pane, choose **Parameter groups**.
3. In the list, choose the custom parameter group that you want to copy.
4. For **Parameter group actions**, choose **Copy**.
5. In **New DB parameter group identifier**, enter a name for the new parameter group.
6. In **Description**, enter a description for the new parameter group.
7. Choose **Copy**.

Amazon CLI

To copy a DB cluster parameter group, use the Amazon CLI `copy-db-cluster-parameter-group` command with the following required parameters:

- `--source-db-cluster-parameter-group-identifier`
- `--target-db-cluster-parameter-group-identifier`
- `--target-db-cluster-parameter-group-description`

The following example creates a new DB cluster parameter group named `mygroup2` that is a copy of the DB cluster parameter group `mygroup1`.

Example

For Linux, macOS, or Unix:

```
aws rds copy-db-cluster-parameter-group \
    --source-db-cluster-parameter-group-identifier mygroup1 \
    --target-db-cluster-parameter-group-identifier mygroup2 \
    --target-db-cluster-parameter-group-description "DB parameter group 2"
```

For Windows:

```
aws rds copy-db-cluster-parameter-group ^
    --source-db-cluster-parameter-group-identifier mygroup1 ^
    --target-db-cluster-parameter-group-identifier mygroup2 ^
    --target-db-cluster-parameter-group-description "DB parameter group 2"
```

RDS API

To copy a DB cluster parameter group, use the RDS API `CopyDBClusterParameterGroup` operation with the following required parameters:

- `SourceDBClusterParameterGroupIdentifier`
- `TargetDBClusterParameterGroupIdentifier`
- `TargetDBClusterParameterGroupDescription`

Listing DB cluster parameter groupsin Amazon Aurora

You can list the DB cluster parameter groups you've created for your Amazon account.

> **Note**
>
> Default parameter groups are automatically created from a default parameter template when you create a DB cluster for a particular DB engine and version. These default parameter groups contain preferred parameter settings and can't be modified. When you create a custom parameter group, you can modify parameter settings.

Console

To list all DB cluster parameter groups for an Amazon account

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.

   The DB cluster parameter groups appear in the list with **DB cluster parameter group** for **Type**.

Amazon CLI

To list all DB cluster parameter groups for an Amazon account, use the Amazon CLI `describe-db-cluster-parameter-groups` command.

Example

The following example lists all available DB cluster parameter groups for an Amazon account.

```
aws rds describe-db-cluster-parameter-groups
```

The following example describes the *mydbclusterparametergroup* parameter group.

For Linux, macOS, or Unix:

```
aws rds describe-db-cluster-parameter-groups \
    --db-cluster-parameter-group-name mydbclusterparametergroup
```

For Windows:

```
aws rds describe-db-cluster-parameter-groups ^
    --db-cluster-parameter-group-name mydbclusterparametergroup
```

The command returns a response like the following:

```
{
    "DBClusterParameterGroups": [
        {
            "DBClusterParameterGroupName": "mydbclusterparametergroup",
            "DBParameterGroupFamily": "aurora-mysql5.7",
            "Description": "My new cluster parameter group",
            "DBClusterParameterGroupArn": "arn:aws:rds:us-east-1:123456789012:cluster-
pg:mydbclusterparametergroup"
        }
    ]
}
```

RDS API

To list all DB cluster parameter groups for an Amazon account, use the RDS API `DescribeDBClusterParameterGroups` action.

Viewing parameter values for a DB cluster parameter groupin Amazon Aurora

You can get a list of all parameters in a DB cluster parameter group and their values.

Console

To view the parameter values for a DB cluster parameter group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.

   The DB cluster parameter groups appear in the list with **DB cluster parameter group** for **Type**.
3. Choose the name of the DB cluster parameter group to see its list of parameters.

Amazon CLI

To view the parameter values for a DB cluster parameter group, use the Amazon CLI `describe-db-cluster-parameters` command with the following required parameter.

- `--db-cluster-parameter-group-name`

Example

The following example lists the parameters and parameter values for a DB cluster parameter group named *mydbclusterparametergroup*, in JSON format.

The command returns a response like the following:

```
aws rds describe-db-cluster-parameters --db-cluster-parameter-group-
name mydbclusterparametergroup
```

```
{
    "Parameters": [
        {
            "ParameterName": "allow-suspicious-udfs",
            "Description": "Controls whether user-defined functions that have only an
 xxx symbol for the main function can be loaded",
            "Source": "engine-default",
            "ApplyType": "static",
            "DataType": "boolean",
            "AllowedValues": "0,1",
            "IsModifiable": false,
```

```
            "ApplyMethod": "pending-reboot",
            "SupportedEngineModes": [
                "provisioned"
            ]
        },
        {
            "ParameterName": "aurora_binlog_read_buffer_size",
            "ParameterValue": "5242880",
            "Description": "Read buffer size used by master dump thread when the switch
 aurora_binlog_use_large_read_buffer is ON.",
            "Source": "engine-default",
            "ApplyType": "dynamic",
            "DataType": "integer",
            "AllowedValues": "8192-536870912",
            "IsModifiable": true,
            "ApplyMethod": "pending-reboot",
            "SupportedEngineModes": [
                "provisioned"
            ]
        },

...
```

RDS API

To view the parameter values for a DB cluster parameter group, use the RDS API `DescribeDBClusterParameters` command with the following required parameter.

- `DBClusterParameterGroupName`

In some cases, the allowed values for a parameter aren't shown. These are always parameters where the source is the database engine default.

To view the values of these parameters, you can run the following SQL statements:

- MySQL:

```
-- Show the value of a particular parameter
mysql$ SHOW VARIABLES LIKE '%parameter_name%';

-- Show the values of all parameters
mysql$ SHOW VARIABLES;
```

- PostgreSQL:

```
-- Show the value of a particular parameter
postgresql=> SHOW parameter_name;

-- Show the values of all parameters
postgresql=> SHOW ALL;
```

Deleting a DB cluster parameter groupin Amazon Aurora

You can delete a DB cluster parameter group using the Amazon Web Services Management Console, Amazon CLI, or RDS API. A DB cluster parameter group parameter group is eligible for deletion only if it isn't associated with a DB cluster.

Console

To delete parameter groups

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.

   The parameter groups appear in a list.
3. Choose the name of the DB cluster parameter groups to be deleted.
4. Choose **Actions** and then **Delete**.
5. Review the parameter group names and then choose **Delete**.

Amazon CLI

To delete a DB cluster parameter group, use the Amazon CLI `delete-db-cluster-parameter-group` command with the following required parameter.

- `--db-parameter-group-name`

Example

The following example deletes a DB cluster parameter group named *mydbparametergroup.*

```
aws rds delete-db-cluster-parameter-group --db-parameter-group-name mydbparametergroup
```

RDS API

To delete a DB cluster parameter group, use the RDS API `DeleteDBClusterParameterGroup` command with the following required parameter.

- `DBParameterGroupName`

DB parameter groups for Amazon Aurora DB instances

DB instances use DB parameter groups. The following sections describe configuring and managing DB instance parameter groups.

Topics

- Creating a DB parameter group in Amazon Aurora
- Associating a DB parameter group with a DB instance in Amazon Aurora
- Modifying parameters in a DB parameter group in Amazon Aurora
- Resetting parameters in a DB parameter group to their default values in Amazon Aurora
- Copying a DB parameter group in Amazon Aurora
- Listing DB parameter groups in Amazon Aurora
- Viewing parameter values for a DB parameter group in Amazon Aurora
- Deleting a DB parameter group in Amazon Aurora

Creating a DB parameter group in Amazon Aurora

You can create a new DB parameter group using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

The following limitations apply to the DB parameter group name:

- The name must be 1 to 255 letters, numbers, or hyphens.

  Default parameter group names can include a period, such as `default.mysql8.0`. However, custom parameter group names can't include a period.
- The first character must be a letter.

- The name can't end with a hyphen or contain two consecutive hyphens.

Console

To create a DB parameter group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. Choose **Create parameter group**.
4. For **Parameter group name**, enter the name of your new DB parameter group.
5. For **Description**, enter a description for your new DB parameter group.
6. For **Engine type**, choose your DB engine.
7. For **Parameter group family**, choose a DB parameter group family.
8. For **Type**, if applicable, choose **DB Parameter Group**.
9. Choose **Create**.

Amazon CLI

To create a DB parameter group, use the Amazon CLI `create-db-parameter-group` command. The following example creates a DB parameter group named *mydbparametergroup* for MySQL version 8.0 with a description of "*My new parameter group*."

Include the following required parameters:

- `--db-parameter-group-name`
- `--db-parameter-group-family`
- `--description`

To list all of the available parameter group families, use the following command:

```
aws rds describe-db-engine-versions --query "DBEngineVersions[].DBParameterGroupFamily"
```

> **Note**
>
> The output contains duplicates.

Example

For Linux, macOS, or Unix:

```
aws rds create-db-parameter-group \
    --db-parameter-group-name mydbparametergroup \
    --db-parameter-group-family aurora-mysql5.7 \
    --description "My new parameter group"
```

For Windows:

```
aws rds create-db-parameter-group ^
    --db-parameter-group-name mydbparametergroup ^
    --db-parameter-group-family aurora-mysql5.7 ^
    --description "My new parameter group"
```

This command produces output similar to the following:

```
DBPARAMETERGROUP  mydbparametergroup  aurora-mysql5.7  My new parameter group
```

RDS API

To create a DB parameter group, use the RDS API `CreateDBParameterGroup` operation.

Include the following required parameters:

- `DBParameterGroupName`
- `DBParameterGroupFamily`
- `Description`

Associating a DB parameter group with a DB instance in Amazon Aurora

You can create your own DB parameter groups with customized settings. You can associate a DB parameter group with a DB instance using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API. You can do so when you create or modify a DB instance.

For information about creating a DB parameter group, see Creating a DB parameter group in Amazon Aurora. For information about modifying a DB instance, see Modifying a DB instance in a DB cluster.

> **Note**
>
> When you associate a new DB parameter group with a DB instance, the modified static and dynamic parameters are applied only after the DB instance is rebooted. However, if you modify dynamic parameters in the DB parameter group after you associate it with the DB instance, these changes are applied immediately without a reboot.

Console

To associate a DB parameter group with a DB instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB instance that you want to modify.
3. Choose **Modify**. The **Modify DB instance** page appears.
4. Change the **DB parameter group** setting.
5. Choose **Continue** and check the summary of modifications.
6. (Optional) Choose **Apply immediately** to apply the changes immediately. Choosing this option can cause an outage in some cases.
7. On the confirmation page, review your changes. If they are correct, choose **Modify DB instance** to save your changes.

   Or choose **Back** to edit your changes or **Cancel** to cancel your changes.

Amazon CLI

To associate a DB parameter group with a DB instance, use the Amazon CLI `modify-db-instance` command with the following options:

- `--db-instance-identifier`
- `--db-parameter-group-name`

The following example associates the mydbpg DB parameter group with the database-1 DB instance. The changes are applied immediately by using --apply-immediately. Use --no-apply-immediately to apply the changes during the next maintenance window.

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-instance \
    --db-instance-identifier database-1 \
    --db-parameter-group-name mydbpg \
    --apply-immediately
```

For Windows:

```
aws rds modify-db-instance ^
    --db-instance-identifier database-1 ^
    --db-parameter-group-name mydbpg ^
    --apply-immediately
```

RDS API

To associate a DB parameter group with a DB instance, use the RDS API ModifyDBInstance operation with the following parameters:


- DBInstanceName
- DBParameterGroupName

Modifying parameters in a DB parameter group in Amazon Aurora

You can modify parameter values in a customer-created DB parameter group; you can't change the parameter values in a default DB parameter group. Changes to parameters in a customer-created DB parameter group are applied to all DB instances that are associated with the DB parameter group.

There are two types of parameters: dynamic parameters and static parameters. Changes to dynamic parameters are applied to the DB instance immediately without a reboot. Changes to static parameters are applied only after the DB instance is rebooted.

The RDS console shows the status of the DB parameter group associated with a DB instance on the **Configuration** tab. For example, if the DB instance isn't using the latest changes to its associated DB parameter group, the RDS console shows the DB parameter group with a status of **pending-reboot**. To apply the latest parameter changes to that DB instance, manually reboot the DB instance.

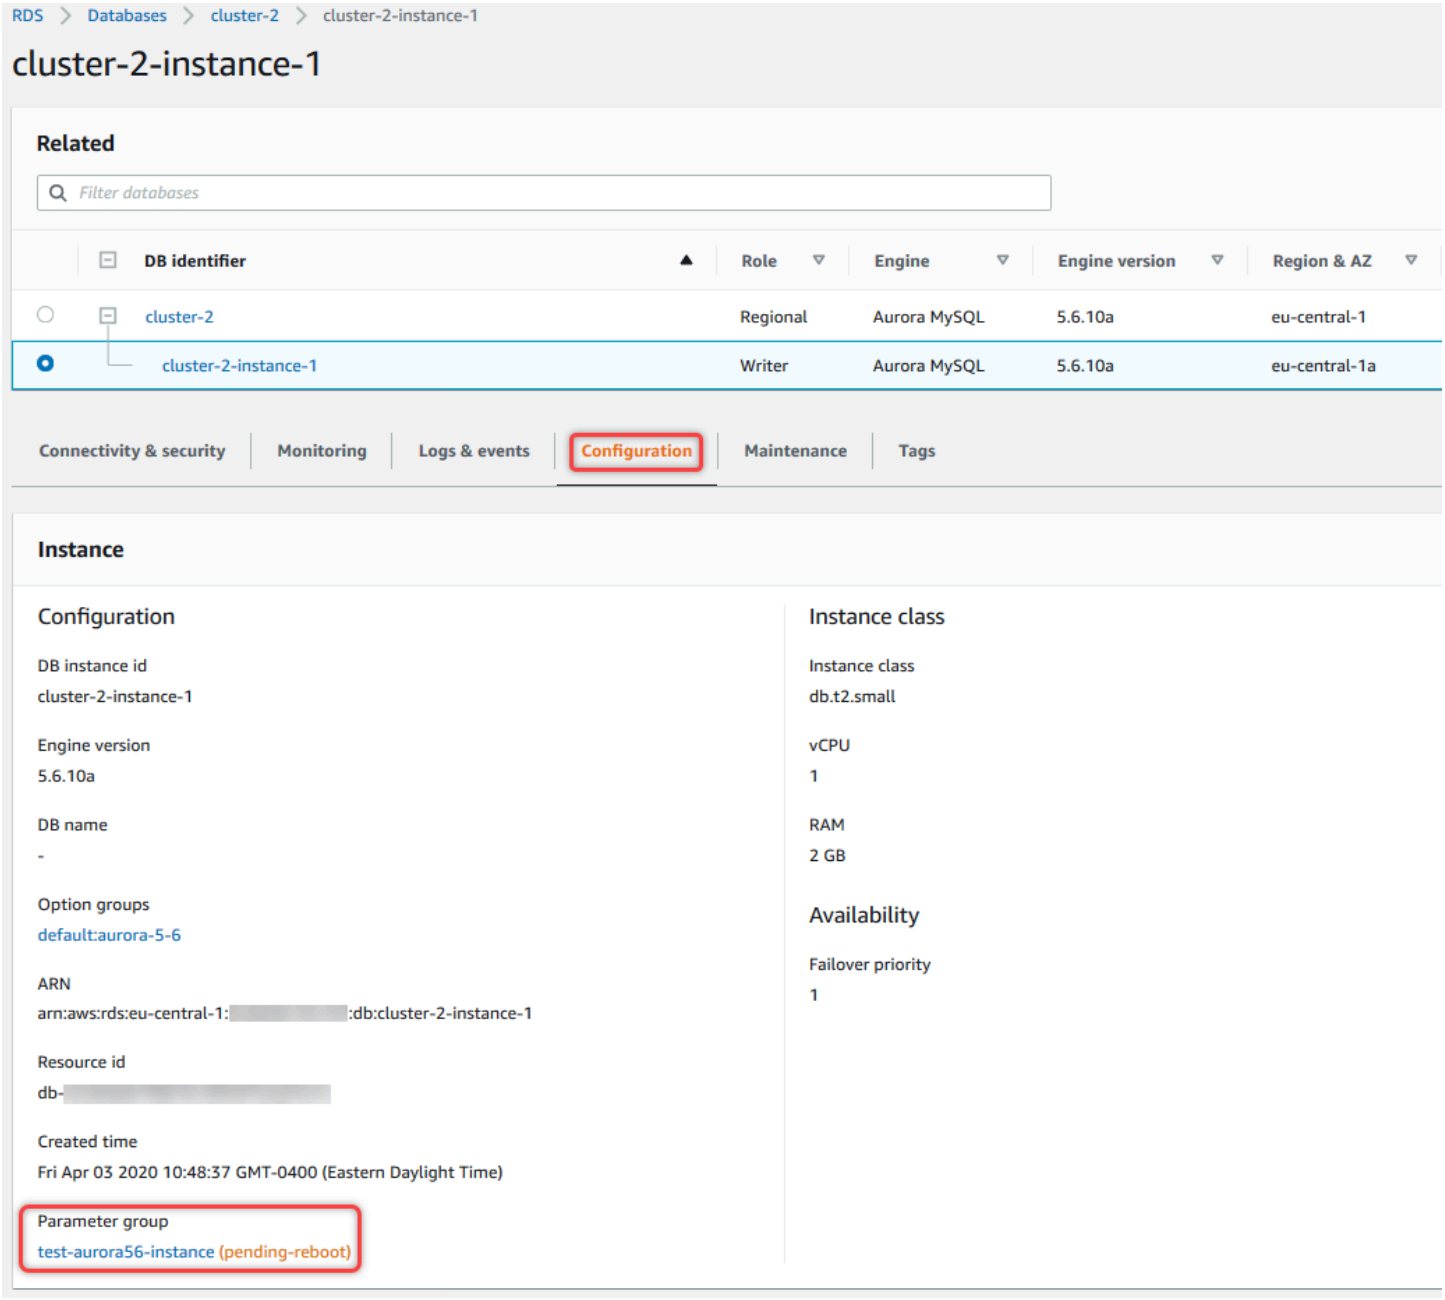

Console

To modify the parameters in a DB parameter group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. In the list, choose the name of the parameter group that you want to modify.
4. For **Parameter group actions**, choose **Edit**.
5. Change the values of the parameters that you want to modify. You can scroll through the parameters using the pagination controls.

   You can't change values in a default parameter group.
6. Choose **Save changes**.

Amazon CLI

To modify a DB parameter group, use the Amazon CLI `modify-db-parameter-group` command with the following required options:

- `--db-parameter-group-name`
- `--parameters`

The following example modifies the `max_connections` and `max_allowed_packet` values in the DB parameter group named *mydbparametergroup*.

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-parameter-group \
    --db-parameter-group-name mydbparametergroup \
    --parameters
 "ParameterName=max_connections,ParameterValue=250,ApplyMethod=immediate" \

 "ParameterName=max_allowed_packet,ParameterValue=1024,ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-parameter-group ^
    --db-parameter-group-name mydbparametergroup ^
    --parameters
 "ParameterName=max_connections,ParameterValue=250,ApplyMethod=immediate" ^

 "ParameterName=max_allowed_packet,ParameterValue=1024,ApplyMethod=immediate"
```

The command produces output like the following:

```
DBPARAMETERGROUP  mydbparametergroup
```

RDS API

To modify a DB parameter group, use the RDS API `ModifyDBParameterGroup` operation with the following required parameters:


- `DBParameterGroupName`
- `Parameters`

Resetting parameters in a DB parameter group to their default values in Amazon Aurora

You can reset parameter values in a customer-created DB parameter group to their default values. Changes to parameters in a customer-created DB parameter group are applied to all DB instances that are associated with the DB parameter group.

When you use the console, you can reset specific parameters to their default values. However, you can't easily reset all of the parameters in the DB parameter group at once. When you use the Amazon CLI or RDS API, you can reset specific parameters to their default values. You can also reset all of the parameters in the DB parameter group at once.

Changes to some parameters are applied to the DB instance immediately without a reboot. Changes to other parameters are applied only after the DB instance is rebooted. The RDS console shows the status of the DB parameter group associated with a DB instance on the **Configuration** tab. For example, suppose that the DB instance isn't using the latest changes to its associated DB parameter group. If so, the RDS console shows the DB parameter group with a status of **pending-reboot**. To apply the latest parameter changes to that DB instance, manually reboot the DB instance.

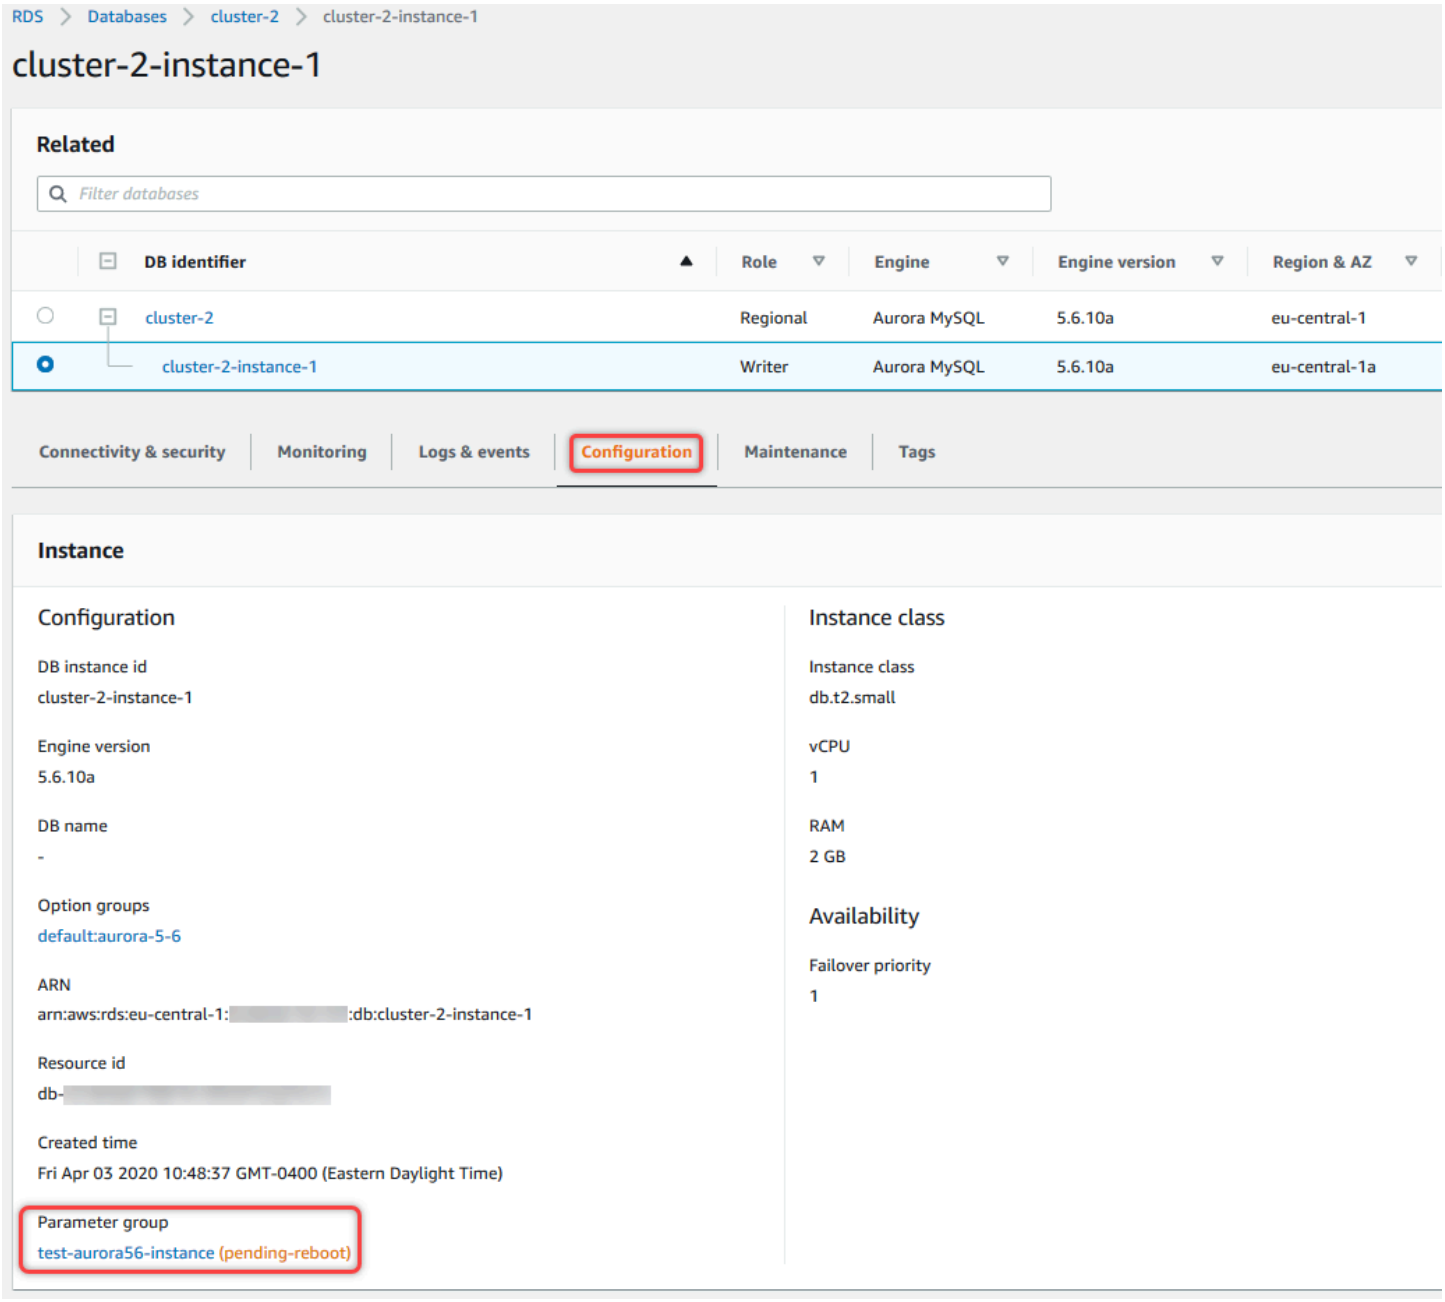

Note

In a default DB parameter group, parameters are always set to their default values.

Console

To reset parameters in a DB parameter group to their default values

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. In the list, choose the parameter group.
4. For **Parameter group actions**, choose **Edit**.
5. Choose the parameters that you want to reset to their default values. You can scroll through the parameters using the pagination controls.

   You can't reset values in a default parameter group.
6. Choose **Reset** and then confirm by choosing **Reset parameters**.

Amazon CLI

To reset some or all of the parameters in a DB parameter group, use the Amazon CLI `reset-db-parameter-group` command with the following required option: `--db-parameter-group-name`.

To reset all of the parameters in the DB parameter group, specify the `--reset-all-parameters` option. To reset specific parameters, specify the `--parameters` option.

The following example resets all of the parameters in the DB parameter group named *mydbparametergroup* to their default values.

Example

For Linux, macOS, or Unix:

```
aws rds reset-db-parameter-group \
    --db-parameter-group-name mydbparametergroup \
    --reset-all-parameters
```

For Windows:

```
aws rds reset-db-parameter-group ^
```

```
    --db-parameter-group-name mydbparametergroup ^
    --reset-all-parameters
```

The following example resets the `max_connections` and `max_allowed_packet` options to their default values in the DB parameter group named *mydbparametergroup*.

Example

For Linux, macOS, or Unix:

```
aws rds reset-db-parameter-group \
    --db-parameter-group-name mydbparametergroup \
    --parameters "ParameterName=max_connections,ApplyMethod=immediate" \
                 "ParameterName=max_allowed_packet,ApplyMethod=immediate"
```

For Windows:

```
aws rds reset-db-parameter-group ^
    --db-parameter-group-name mydbparametergroup ^
    --parameters "ParameterName=max_connections,ApplyMethod=immediate" ^
                 "ParameterName=max_allowed_packet,ApplyMethod=immediate"
```

The command produces output like the following:

```
DBParameterGroupName  mydbparametergroup
```

RDS API

To reset parameters in a DB parameter group to their default values, use the RDS API `ResetDBParameterGroup` command with the following required parameter: `DBParameterGroupName`.

To reset all of the parameters in the DB parameter group, set the `ResetAllParameters` parameter to `true`. To reset specific parameters, specify the `Parameters` parameter.

Copying a DB parameter group in Amazon Aurora

You can copy custom DB parameter groups that you create. Copying a parameter group can be convenient solution. An example is when you have created a DB parameter group and want to include most of its custom parameters and values in a new DB parameter group. You can copy a

DB parameter group by using the Amazon Web Services Management Console. You can also use the Amazon CLI copy-db-parameter-group command or the RDS API CopyDBParameterGroup operation.

After you copy a DB parameter group, wait at least 5 minutes before creating your first DB instance that uses that DB parameter group as the default parameter group. Doing this allows Amazon RDS to fully complete the copy action before the parameter group is used. This is especially important for parameters that are critical when creating the default database for a DB instance. An example is the character set for the default database defined by the `character_set_database` parameter. Use the **Parameter Groups** option of the Amazon RDS console or the describe-db-parameters command to verify that your DB parameter group is created.

> **Note**
>
> You can't copy a default parameter group. However, you can create a new parameter group that is based on a default parameter group.
> You can't copy a DB parameter group to a different Amazon Web Services account or Amazon Web Services Region.

Console

To copy a DB parameter group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. In the list, choose the custom parameter group that you want to copy.
4. For **Parameter group actions**, choose **Copy**.
5. In **New DB parameter group identifier**, enter a name for the new parameter group.
6. In **Description**, enter a description for the new parameter group.
7. Choose **Copy**.

Amazon CLI

To copy a DB parameter group, use the Amazon CLI `copy-db-parameter-group` command with the following required options:

- `--source-db-parameter-group-identifier`
- `--target-db-parameter-group-identifier`
- `--target-db-parameter-group-description`

The following example creates a new DB parameter group named `mygroup2` that is a copy of the DB parameter group `mygroup1`.

Example

For Linux, macOS, or Unix:

```
aws rds copy-db-parameter-group \
    --source-db-parameter-group-identifier mygroup1 \
    --target-db-parameter-group-identifier mygroup2 \
    --target-db-parameter-group-description "DB parameter group 2"
```

For Windows:

```
aws rds copy-db-parameter-group ^
    --source-db-parameter-group-identifier mygroup1 ^
    --target-db-parameter-group-identifier mygroup2 ^
    --target-db-parameter-group-description "DB parameter group 2"
```

RDS API

To copy a DB parameter group, use the RDS API `CopyDBParameterGroup` operation with the following required parameters:

- `SourceDBParameterGroupIdentifier`
- `TargetDBParameterGroupIdentifier`
- `TargetDBParameterGroupDescription`

Listing DB parameter groups in Amazon Aurora

You can list the DB parameter groups you've created for your Amazon account.

> **Note**
>
> Default parameter groups are automatically created from a default parameter template when you create a DB instance for a particular DB engine and version. These default parameter groups contain preferred parameter settings and can't be modified. When you create a custom parameter group, you can modify parameter settings.

Console

To list all DB parameter groups for an Amazon account

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.

   The DB parameter groups appear in a list.

Amazon CLI

To list all DB parameter groups for an Amazon account, use the Amazon CLI `describe-db-parameter-groups` command.

Example

The following example lists all available DB parameter groups for an Amazon account.

```
aws rds describe-db-parameter-groups
```

The command returns a response like the following:

```
DBPARAMETERGROUP  default.mysql8.0     mysql8.0  Default parameter group for MySQL8.0
DBPARAMETERGROUP  mydbparametergroup   mysql8.0  My new parameter group
```

The following example describes the *mydbparamgroup1* parameter group.

For Linux, macOS, or Unix:

```
aws rds describe-db-parameter-groups \
    --db-parameter-group-name mydbparamgroup1
```

For Windows:

```
aws rds describe-db-parameter-groups ^
    --db-parameter-group-name mydbparamgroup1
```

The command returns a response like the following:

```
DBPARAMETERGROUP  mydbparametergroup1  mysql8.0  My new parameter group
```

RDS API

To list all DB parameter groups for an Amazon account, use the RDS API `DescribeDBParameterGroups` operation.

Viewing parameter values for a DB parameter group in Amazon Aurora

You can get a list of all parameters in a DB parameter group and their values.

Console

To view the parameter values for a DB parameter group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.

   The DB parameter groups appear in a list.
3. Choose the name of the parameter group to see its list of parameters.

Amazon CLI

To view the parameter values for a DB parameter group, use the Amazon CLI `describe-db-parameters` command with the following required parameter.

- `--db-parameter-group-name`

Example

The following example lists the parameters and parameter values for a DB parameter group named *mydbparametergroup.*

```
aws rds describe-db-parameters --db-parameter-group-name mydbparametergroup
```

The command returns a response like the following:

```
DBPARAMETER  Parameter Name            Parameter Value  Source           Data Type
 Apply Type  Is Modifiable
DBPARAMETER  allow-suspicious-udfs                      engine-default   boolean
 static      false
DBPARAMETER  auto_increment_increment                   engine-default   integer
 dynamic     true
DBPARAMETER  auto_increment_offset                      engine-default   integer
 dynamic     true
DBPARAMETER  binlog_cache_size         32768            system           integer
 dynamic     true
DBPARAMETER  socket                    /tmp/mysql.sock  system           string
 static      false
```

RDS API

To view the parameter values for a DB parameter group, use the RDS API `DescribeDBParameters` command with the following required parameter.

- `DBParameterGroupName`

Deleting a DB parameter group in Amazon Aurora

You can delete a DB parameter group using the Amazon Web Services Management Console, Amazon CLI, or RDS API. A parameter group is eligible for deletion only if it isn't associated with a DB instance.

Console

To delete a DB parameter group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.

   The DB parameter groups appear in a list.
3. Choose the name of the parameter groups to be deleted.

4. Choose **Actions** and then **Delete**.
5. Review the parameter group names and then choose **Delete**.

Amazon CLI

To delete a DB parameter group, use the Amazon CLI `delete-db-parameter-group` command with the following required parameter.

- `--db-parameter-group-name`

Example

The following example deletes a DB parameter group named *mydbparametergroup.*

```
aws rds delete-db-parameter-group --db-parameter-group-name mydbparametergroup
```

RDS API

To delete a DB parameter group, use the RDS API `DeleteDBParameterGroup` command with the following required parameter.

- `DBParameterGroupName`

Comparing DB parameter groups

You can use the Amazon Web Services Management Console to view the differences between two DB parameter groups.

The specified parameter groups must both be DB parameter groups, or they both must be DB cluster parameter groups. This is true even when the DB engine and version are the same. For example, you can't compare an `aurora-mysql8.0` (Aurora MySQL version 3) DB parameter group and an `aurora-mysql8.0` DB cluster parameter group.

You can compare Aurora MySQL and RDS for MySQL DB parameter groups, even for different versions, but you can't compare Aurora PostgreSQL and RDS for PostgreSQL DB parameter groups.

To compare two DB parameter groups

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. In the list, choose the two parameter groups that you want to compare.

> **Note**
>
> To compare a default parameter group to a custom parameter group, first choose the default parameter group on the **Default** tab, then choose the custom parameter group on the **Custom** tab.

4. From **Actions**, choose **Compare**.

Specifying DB parameters

DB parameter types include the following:

- Integer
- Boolean
- String
- Long
- Double
- Timestamp
- Object of other defined data types
- Array of values of type integer, Boolean, string, long, double, timestamp, or object

You can also specify integer and Boolean parameters using expressions, formulas, and functions.

Contents

- DB parameter formulas
  - DB parameter formula variables
  - DB parameter formula operators

- DB parameter functions
- DB parameter log expressions
- DB parameter value examples

DB parameter formulas

A DB parameter formula is an expression that resolves to an integer value or a Boolean value. You enclose the expression in braces: {}. You can use a formula for either a DB parameter value or as an argument to a DB parameter function.

Syntax

```
{FormulaVariable}
{FormulaVariable*Integer}
{FormulaVariable*Integer/Integer}
{FormulaVariable/Integer}
```

DB parameter formula variables

Each formula variable returns an integer or a Boolean value. The names of the variables are case-sensitive.

AllocatedStorage

Returns an integer representing the size, in bytes, of the data volume.

DBInstanceClassMemory

Returns an integer for the number of bytes of memory available to the database process. This number is internally calculated by starting with the total amount of memory for the DB instance class. From this, the calculation subtracts memory reserved for the operating system and the RDS processes that manage the instance. Therefore, the number is always somewhat lower than the memory figures shown in the instance class tables in Amazon AuroraDB instance classes. The exact value depends on a combination of factors. These include instance class, DB engine, and whether it applies to an RDS instance or an instance that's part of an Aurora cluster.

DBInstanceVCPU

Returns an integer representing the number of virtual central processing units (vCPUs) used by Amazon RDS to manage the instance.

EndPointPort

Returns an integer representing the port used when connecting to the DB instance.

TrueIfReplica

Returns 1 if the DB instance is a read replica and `0` if it is not. This is the default value for the `read_only` parameter in Aurora MySQL.

DB parameter formula operators

DB parameter formulas support two operators: division and multiplication.

Division operator: /

Divides the dividend by the divisor, returning an integer quotient. Decimals in the quotient are truncated, not rounded.

Syntax

```
dividend / divisor
```

The dividend and divisor arguments must be integer expressions.

*Multiplication operator: **

Multiplies the expressions, returning the product of the expressions. Decimals in the expressions are truncated, not rounded.

Syntax

```
expression * expression
```

Both expressions must be integers.

DB parameter functions

You specify the arguments of DB parameter functions as either integers or formulas. Each function must have at least one argument. Specify multiple arguments as a comma-separated list. The list can't have any empty members, such as *argument1*,,*argument3*. Function names are case-insensitive.

IF

Returns an argument.

Syntax

```
IF(argument1, argument2, argument3)
```

Returns the second argument if the first argument evaluates to true. Returns the third argument otherwise.

GREATEST

Returns the largest value from a list of integers or parameter formulas.

Syntax

```
GREATEST(argument1, argument2,...argumentn)
```

Returns an integer.

LEAST

Returns the smallest value from a list of integers or parameter formulas.

Syntax

```
LEAST(argument1, argument2,...argumentn)
```

Returns an integer.

SUM

Adds the values of the specified integers or parameter formulas.

Syntax

```
SUM(argument1, argument2,...argumentn)
```

Returns an integer.

DB parameter log expressions

You can set an integer DB parameter value to a log expression. You enclose the expression in braces: {}. For example:

```
{log(DBInstanceClassMemory/8187281418)*1000}
```

The `log` function represents log base 2. This example also uses the `DBInstanceClassMemory` formula variable. See DB parameter formula variables.

DB parameter value examples

These examples show using formulas, functions, and expressions for the values of DB parameters.

> **Warning**
>
> Improperly setting parameters in a DB parameter group can have unintended adverse effects. These might include degraded performance and system instability. Use caution when modifying database parameters and back up your data before modifying your DB parameter group. Try out parameter group changes on a test DB instance, created using point-in-time-restores, before applying those parameter group changes to your production DB instances.

Example using the DB parameter function LEAST

You can specify the `LEAST` function in an Aurora MySQL `table_definition_cache` parameter value. Use it to set the number of table definitions that can be stored in the definition cache to the lesser of `DBInstanceClassMemory/393040` or 20,000.

```
LEAST({DBInstanceClassMemory/393040}, 20000)
```

Migrating data to an Amazon Aurora DB cluster

You have several options for migrating data from your existing database to an Amazon Aurora DB cluster, depending on database engine compatibility. Your migration options also depend on the database that you are migrating from and the size of the data that you are migrating.

Migrating data to an Amazon Aurora MySQL DB cluster

You can migrate data from one of the following sources to an Amazon Aurora MySQL DB cluster.

- An RDS for MySQL DB instance
- A MySQL database external to Amazon RDS
- A database that is not MySQL-compatible

For more information, see Migrating data to an Amazon Aurora MySQL DB cluster.

Migrating data to an Amazon Aurora PostgreSQL DB cluster

You can migrate data from one of the following sources to an Amazon Aurora PostgreSQL DB cluster.

- An Amazon RDS PostgreSQL DB instance
- A database that is not PostgreSQL-compatible

For more information, see Migrating data to Amazon Aurora with PostgreSQL compatibility.

Creating an Amazon ElastiCache cache using Aurora DB cluster settings

ElastiCache is a fully managed, in-memory caching service that provides microsecond read and write latencies that support flexible, real-time use cases. ElastiCache can help you accelerate application and database performance. You can use ElastiCache as a primary data store for use cases that don't require data durability, such as gaming leaderboards, streaming, and data analytics. ElastiCache helps remove the complexity associated with deploying and managing a distributed computing environment. For more information, see Common ElastiCache Use Cases and How ElastiCache Can Help for Memcached and Common ElastiCache Use Cases and How ElastiCache Can Help for Redis OSS. You can use the Amazon RDS console for creating ElastiCache cache.

You can operate Amazon ElastiCache in two formats. You can get started with a serverless cache or choose to design your own cache cluster. If you choose to design your own cache cluster, ElastiCache works with both the Redis OSS and Memcached engines. If you're unsure which engine you want to use, see Comparing Memcached and Redis OSS. For more information about Amazon ElastiCache, see the Amazon ElastiCache User Guide.

Topics

- Overview of ElastiCache cache creation with Aurora DB cluster settings
- Creating an ElastiCache cache with settings from an Aurora DB cluster

Overview of ElastiCache cache creation with Aurora DB cluster settings

You can create an ElastiCache cache from Amazon RDS using the same configuration settings as a newly created or existing Aurora DB cluster.

Some use cases to associate an ElastiCache cache with your DB cluster:

- You can save costs and improve your performance by using ElastiCache with RDS versus running on RDS alone.
- You can use the ElastiCache cache as a primary data store for applications that don't require data durability. Your applications that use Redis OSS or Memcached can use ElastiCache with almost no modification.

When you create an ElastiCache cache from RDS, the ElastiCache cache inherits the following settings from the associated Aurora DB cluster:

- ElastiCache connectivity settings
- ElastiCache security settings

You can also set the cache configuration settings according to your requirements.

Setting up ElastiCache in your applications

Your applications must be set up to utilize ElastiCache cache. You can also optimize and improve cache performance by setting up your applications to use caching strategies depending on your requirements.

- To access your ElastiCache cache and get started, see Getting started with ElastiCache (Redis OSS) and Getting started with ElastiCache (Memcached).
- For more information about caching strategies, see Caching strategies and best practices for Memcached and Caching strategies and best practices for Redis OSS.
- For more information about high availability in ElastiCache (Redis OSS) clusters, see High availability using replication groups.
- You might incur costs associated with backup storage, data transfer within or across regions, or use of Amazon Outposts. For pricing details, see Amazon ElastiCache pricing.

Creating an ElastiCache cache with settings from an Aurora DB cluster

You can create an ElastiCache cache for your Aurora DB clusters with settings for inherited from the DB cluster.


Create an ElastiCache cache with settings from a DB cluster

1. To create a DB cluster, follow the instructions in Creating an Amazon Aurora DB cluster.
2. After creating an Aurora DB cluster, the console displays the **Suggested add-ons** window. Select **Create an ElastiCache cluster from RDS using your DB settings**.

   For an existing database, in the **Databases** page, select the required DB cluster. In the **Actions** dropdown menu, choose **Create ElastiCache cluster** to create an ElastiCache cache in RDS that has the same settings as your existing Aurora DB cluster.

In the **ElastiCache configuration section**, the **Source DB identifier** displays which DB cluster the ElastiCache cache inherits settings from.

3. Choose whether you want to create a Redis OSS or Memcached cluster. For more information, see Comparing Memcached and Redis OSS.

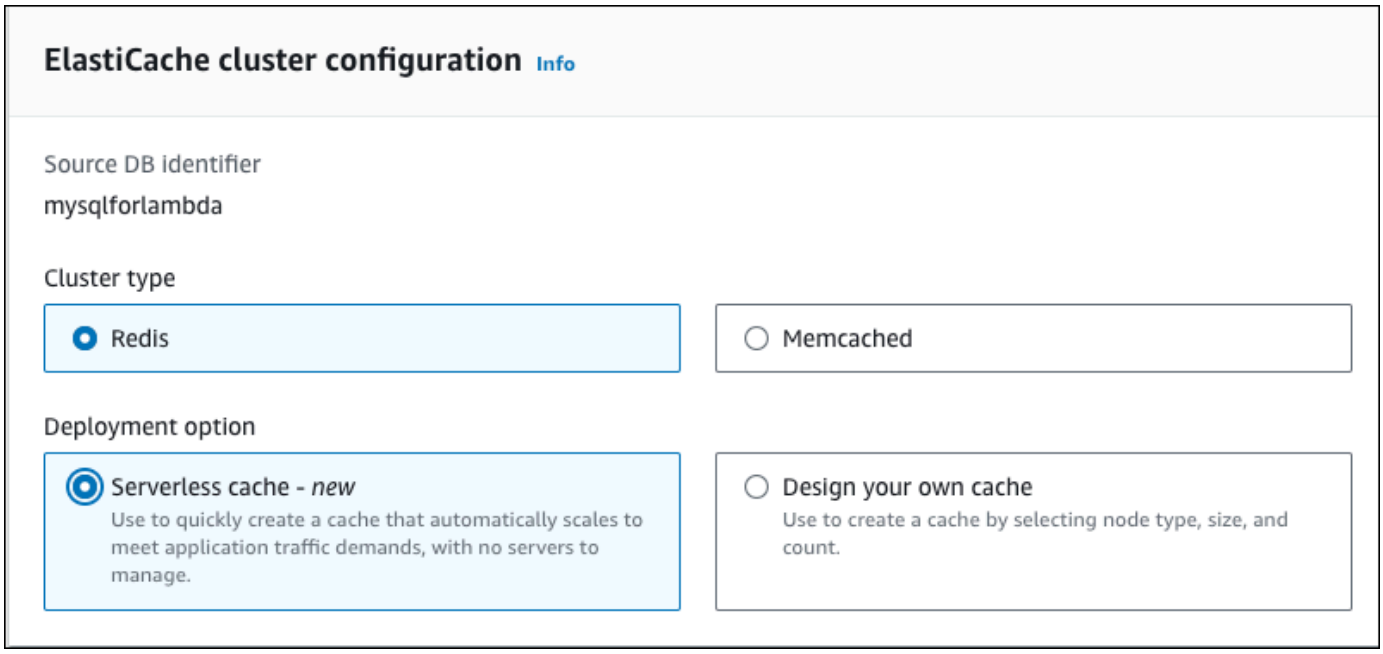

4. After this, choose whether you want to create a **Serverless cache** or **Design your own cache**. For more information, see Choosing between deployment options.

   If you choose **Serverless cache**:

   a. In **Cache settings**, enter values for **Name** and **Description**.

   b. Under **View default settings**, leave the default settings to establish the connection between your cache and DB cluster.

   c. You can also edit the default settings by choosing **Customize default settings**. Select the **ElastiCache connectivity settings**, **ElastiCache security settings**, and **Maximum usage limits**.

5. If you choose **Design your own cache**:

   a. If you chose **Redis OSS cluster**, choose whether you want to keep the cluster mode **Enabled** or **Disabled**. For more information, see Replication: Redis OSS (Cluster Mode Disabled) vs. Redis OSS (Cluster Mode Enabled).

   b. Enter values for **Name**, **Description**, and **Engine version**.

For **Engine version**, the recommended default value is the latest engine version. You can also choose an **Engine version** for the ElastiCache cache that best meets your requirements.

c. Choose the node type in the **Node type** option. For more information, see Managing nodes.

If you choose to create a Redis OSS cluster with the **Cluster mode** set to **Enabled**, then enter the number of shards (partitions/node groups) in the **Number of shards** option.

Enter the number of replicas of each shard in **Number of replicas**.

> **Note**
>
> The selected node type, the number of shards, and the number of replicas all affect your cache performance and resource costs. Be sure these settings match your database needs. For pricing information, see Amazon ElastiCache pricing.

d. Select the **ElastiCache connectivity settings** and **ElastiCache security settings**. You can keep the default settings or customize these settings per your requirements.

6. Verify the default and inherited settings of your ElastiCache cache. Some settings can't be changed after creation.

> **Note**
>
> RDS might adjust the backup window of your ElastiCache cache to meet the minimum window requirement of 60 minutes. The backup window of your source database remains the same.

7. When you're ready, choose **Create ElastiCache cache**.

The console displays a confirmation banner for the ElastiCache cache creation. Follow the link in the banner to the ElastiCache console to view the cache details. The ElastiCache console displays the newly created ElastiCache cache.

Auto migrating databases to Amazon Aurora using Amazon Database Migration Service

You can use the Aurora console to migrate a database from an EC2, on-prem or other cloud provider instance to Aurora. Amazon Database Migration Service (Amazon DMS) is used for this. For more information about it, see What is Amazon Database Migration Service? in the *Amazon Database Migration Service User Guide*.

To begin the migration, you must create an equivalent Aurora DB cluster. After you create your target database, you can import your source into it. For source databases smaller than 1TiB, this migration action reduces the time and resources required to migrate your data into Aurora .

Overview

The Aurora console allows you to migrate EC2, on-prem or other cloud provider database into equivalent Aurora database. You must create an Aurora database to enable migration from the console.

> **Note**
>
> For the databases to be equivalent, they must have the same database engine and compatible engine versions.

This approach can be used for the following database engines:

- MySQL
- PostgreSQL

The migration process involves the following steps:

- Create an equivalent database in Aurora. Then, set up a proper network between source and target. For EC2 instances in the same region, account, and VPC, network setup can be skipped. For more information, see Setting up a network in the *Amazon Database Migration Service User Guide*. For instructions on creating your database, see Creating an Amazon Aurora DB cluster.
- Choose the type of replication for your database:

- **Full load migration** – Aurora copies the complete source database to the target database, creating new tables in the target when necessary.

  > **Note**
  >
  > This option requires downtime. Your target Aurora database will be unavailable to applications during the migration process.

- **Full load and change data capture (CDC) migration** – Similar to full load migration, with this option, Aurora copies over the complete source database to the target database. However, after the full load migration, Aurora applies any captured changes in the source to the target database. Change data capture collects changes to the database logs by using the database engine's native API.

  > **Note**
  >
  > This option requires downtime. Your target Aurora database will be unavailable to applications during the migration process.

- **Change data capture (CDC)** – Use this option to keep your target database available through the migration. Aurora migrates ongoing changes in your source database to the target database.

- Aurora creates the necessary resources to facilitate the migration. Once Aurora creates the required resources, it notifies you about the resources created and allows you to initiate the data transfer.

  The time required to complete the migration depends on the type of replication and the size of the source database.

Prerequisites

- Setting up a network (for EC2s in the same region, account and VPC, it can be skipped)
- Setting up source and target databases
  - **MySQL**

    Please follow the following basic prerequisites for your source database:

    - Using MySQL as a source

Please follow the following basic prerequisites for your target database:

- Using MySQL as a target

Additionally when migrating from a MySQL source database, your Aurora account must have the Replication Admin role. You must also have the proper privileges applied for that role.

- **PostgreSQL**

Please follow the following prerequisites for your source database:

- Using PostgreSQL as a source

Please follow the following prerequisites for your target database:

- Using PostgreSQL as a target

> **Note**
>
> Some Amazon DMS transactions are idle for some time before the DMS engine uses them again. By using the parameter `idle_in_transaction_session_timeout` in PostgreSQL versions 9.6 and higher, you can cause idle transactions to time out and fail.

Limitations

The following limitations apply to the auto-migrate process:

- Your target database status must be **Available** to begin source database migration.
- You can migrate your source database only to a database:
  - that is not any of the following:
    - Aurora global database
    - Aurora Limitless database
    - Aurora Serverless v1
  - that uses a supported version of MySQL or PostgreSQL as listed here
- Limitations of DMS

> **Note**
>
> Although underlying Amazon DMS tool supports selection rules for certain migration scenarios, the auto-migrating databases to Aurora feature does not.

Creating IAM resources for homogeneous migrations

Aurora uses Amazon DMS to migrate your data. To access your databases and to migrate data, Amazon DMS creates a serverless environment for homogeneous data migrations. In this environment, Amazon DMS requires access to VPC peering, route tables, security groups, and other Amazon resources. Also, Amazon DMS stores logs, metrics, and progress for each data migration in Amazon CloudWatch. To create a data migration project, Amazon DMS needs access to these services.

Also, Amazon DMS requires access to the secrets that respresent a set of user credentials to authenticate the database connection for the source and target connection.

> **Note**
>
> By using the **Migrate data from EC2 instance** action, you can use the Aurora console to generate these IAM resources. Skip this step if you use the console generated IAM resources.

You need the following IAM resources for this process:

Topics

- Creating an IAM policy for homogeneous data migrations
- Creating an IAM role for homogeneous data migrations
- Creating a secret access policy and role
- Creating an IAM role for Amazon DMS to manage Amazon VPC

Creating an IAM policy for homogeneous data migrations

In this step, you create an IAM policy that provides Amazon DMS with access to Amazon EC2 and CloudWatch resources. Next, create an IAM role and attach this policy.

To create an IAM policy for data migration

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. In the navigation pane, choose **Policies**.
3. Choose **Create policy**.
4. In the **Create policy** page, choose the **JSON** tab.
5. Paste the following JSON into the editor.

   JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "ec2:DescribeRouteTables",
                "ec2:DescribeSecurityGroups",
                "ec2:DescribeVpcPeeringConnections",
                "ec2:DescribeVpcs",
                "ec2:DescribePrefixLists",
                "logs:DescribeLogGroups"
            ],
            "Resource": "*"
        },
        {
            "Effect": "Allow",
            "Action": [
                "servicequotas:GetServiceQuota"
            ],
            "Resource": "arn:aws-cn:servicequotas:*:*:vpc/L-0EA8095F"
        },
        {
            "Effect": "Allow",
            "Action": [
                "logs:CreateLogGroup",
                "logs:DescribeLogStreams"
            ],
            "Resource": "arn:aws-cn:logs:*:*:log-group:dms-data-migration-*"
        },
```

```
        {
            "Effect": "Allow",
            "Action": [
                "logs:CreateLogStream",
                "logs:PutLogEvents"
            ],
            "Resource": "arn:aws-cn:logs:*:*:log-group:dms-data-migration-
*:log-stream:dms-data-migration-*"
        },
        {
            "Effect": "Allow",
            "Action": "cloudwatch:PutMetricData",
            "Resource": "*"
        },
        {
            "Effect": "Allow",
            "Action": [
                "ec2:CreateRoute",
                "ec2:DeleteRoute"
            ],
            "Resource": "arn:aws-cn:ec2:*:*:route-table/*"
        },
        {
            "Effect": "Allow",
            "Action": [
                "ec2:CreateTags"
            ],
            "Resource": [
                "arn:aws-cn:ec2:*:*:security-group/*",
                "arn:aws-cn:ec2:*:*:security-group-rule/*",
                "arn:aws-cn:ec2:*:*:route-table/*",
                "arn:aws-cn:ec2:*:*:vpc-peering-connection/*",
                "arn:aws-cn:ec2:*:*:vpc/*"
            ]
        },
        {
            "Effect": "Allow",
            "Action": [
                "ec2:AuthorizeSecurityGroupEgress",
                "ec2:AuthorizeSecurityGroupIngress"
            ],
            "Resource": "arn:aws-cn:ec2:*:*:security-group-rule/*"
        },
        {
```

```
            "Effect": "Allow",
            "Action": [
                "ec2:AuthorizeSecurityGroupEgress",
                "ec2:AuthorizeSecurityGroupIngress",
                "ec2:RevokeSecurityGroupEgress",
                "ec2:RevokeSecurityGroupIngress"
            ],
            "Resource": "arn:aws-cn:ec2:*:*:security-group/*"
        },
        {
            "Effect": "Allow",
            "Action": [
                "ec2:AcceptVpcPeeringConnection",
                "ec2:ModifyVpcPeeringConnectionOptions"
            ],
            "Resource": "arn:aws-cn:ec2:*:*:vpc-peering-connection/*"
        },
        {
            "Effect": "Allow",
            "Action": "ec2:AcceptVpcPeeringConnection",
            "Resource": "arn:aws-cn:ec2:*:*:vpc/*"
        }
    ]
}
```

6. Choose **Next: Tags** and **Next: Review.**
7. Enter **`HomogeneousDataMigrationsPolicy`** for **Name***, and choose **Create policy**.

Creating an IAM role for homogeneous data migrations

In this step, you create an IAM role that provides access to Amazon Secrets Manager, Amazon EC2, and CloudWatch.

To create an IAM role for data migrations

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. In the navigation pane, choose **Roles**.
3. Choose **Create role**.
4. On the **Select trusted entity** page, for **Trusted entity type**, choose **Amazon Service**. For **Use cases for other Amazon services**, choose **DMS**.

5. Select the **DMS** check box and choose **Next**.
6. On the **Add permissions** page, choose **HomogeneousDataMigrationsPolicy** that you created before. Choose **Next**.
7. On the **Name, review, and create** page, enter **HomogeneousDataMigrationsRole** for **Role name**, and choose **Create role**.
8. On the **Roles** page, enter **HomogeneousDataMigrationsRole** for **Role name**. Choose **HomogeneousDataMigrationsRole**.
9. On the **HomogeneousDataMigrationsRole** page, choose the **Trust relationships** tab. Choose **Edit trust policy**.
10. On the **Edit trust policy** page, paste the following JSON into the editor, replacing the existing text.

    JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "",
            "Effect": "Allow",
            "Principal": {
                "Service": [
                    "dms-data-migrations.amazonaws.com",
                    "dms.your_region.amazonaws.com"
                ]
            },
            "Action": "sts:AssumeRole"
        }
    ]
}
```

    In the preceding example, replace *your_region* with the name of your Amazon Web Services Region.

    The preceding resource-based policy provides Amazon DMS service principals with permissions to perform tasks according to the customer managed **HomogeneousDataMigrationsPolicy** policy.

11. Choose **Update policy**.

Creating a secret access policy and role

Follow the procedures below to create your secret access policy and role which allow DMS to access the user credentials for your source and target databases.

To create the secret access policy and role, which allows Amazon RDS to access Amazon Secrets Manager to access your appropriate secret

1. Sign in to the Amazon Web Services Management Console and open the Amazon Identity and Access Management (IAM) console at https://console.amazonaws.cn/iam/.
2. Choose **Policies**, then choose **Create policy**.
3. Choose **JSON** and enter the following policy to enable access to and decryption of your secret.

   JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": "secretsmanager:GetSecretValue",
            "Resource": "arn:aws-cn:secretsmanager:us-
east-1:111122223333:secret:SecretName-ABCDEF"
        },
        {
            "Effect": "Allow",
            "Action": [
                "kms:Decrypt",
                "kms:DescribeKey"
            ],
            "Resource": "arn:aws-cn:kms:us-
east-1:111122223333:key/1234abcd-12ab-34cd-56ef-1234567890ab"
        }
    ]
}
```

Here, *secret_arn* is the ARN of your secret, which you can get from either `SecretsManagerSecretId` as appropriate, and *kms_key_arn* is the ARN of the Amazon KMS key that you are using to encrypt your secret, as in the following example.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": "secretsmanager:GetSecretValue",
            "Resource": "arn:aws-cn:secretsmanager:us-
east-2:123456789012:secret:MySQLTestSecret-qeHamH"
        },
        {
             "Effect": "Allow",
             "Action": [
                        "kms:Decrypt",
                        "kms:DescribeKey"
                      ],
             "Resource": "arn:aws-cn:kms:us-
east-2:123456789012:key/761138dc-0542-4e58-947f-4a3a8458d0fd"
        }
     ]
}
```

> **Note**
>
> If you use the default encryption key created by Amazon Secrets Manager, you do not have to specify the Amazon KMS permissions for *kms_key_arn*.
> If you want your policy to provide access to both secrets, simply specify an additional JSON resource object for the other *secret_arn*.

4. Review and create the policy with a friendly name and optional description.
5. Choose **Roles**, then choose **Create role**.
6. Choose **Amazon service** as the type of trusted entity.

7. Choose **DMS** from the list of services as the trusted service, then choose **Next: Permissions**.
8. Look up and attach the policy you created in step 4, then proceed through adding any tags and review your role. At this point, edit the trust relationships for the role to use your Amazon RDS regional service principal as the trusted entity. This principal has the following format.

   ```
   dms.region-name.amazonaws.com
   ```

   Here, *region-name* is the name of your region, such as `us-east-1`. Thus, an Amazon RDS regional service principal for this region follows.

   ```
   dms.us-east-1.amazonaws.com
   dms-data-migrations.amazonaws.com
   ```

Creating an IAM role for Amazon DMS to manage Amazon VPC

You must create an IAM role for Amazon DMS to manage the VPC settings for your resources. This role must be available for successful migration.

Creating the `dms-vpc-role` for database migration

<result>

This creates the role for the DMS to manage the VPC settings for the migration.
</result>

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. In the navigation pane of the console, choose **Roles** and then choose **Create role**.
3. Choose the **Amazon Web Services service** option for the **Select trusted entity** option.

   For **Use case**, select **DMS**.
4. For the **Add permissions** step, select `AmazonDMSVPCManagementRole` and choose **Next**.
5. In the **Name, review, and create** page, set the **Role name** to `dms-vpc-role` and choose **Create role**.

Setting up data migration for EC2 database

To begin migrating data from your EC2 source database, you must create an equivalent Aurora database. For instructions on creating your database, see Creating an Amazon Aurora DB cluster .

After creating your target database, use the following steps to set up the data migration:

Set up data migration project

1. Select the target database on the **Databases** page in the RDS console.
2. Choose the **Actions** dropdown and select the **Migrate data from EC2 database** option. To see the supported target databases, see Limitations.
3. Under the **Select source EC2 database** section:
    1. Check the **Engine type** and make sure it is the same as your source database.

       Also, check if the engine versions are compatible.
    2. For **EC2 instance**, choose the EC2 instance where your source database resides.
    3. For **Port**, enter the port on which your source database allows traffic.
    4. For **Secret**, choose **Create and use a new secret** if you don't have an existing secret. Enter the **Username** and **Password** for your source database. Also choose the KMS key with which to encrypt your secret.

       If you have an existing secret, select **Use an existing secret** and then choose secret from the dropdown.
    5. For **IAM role for secret**, if you have an existing IAM role, select **Use an existing IAM role** and choose an IAM role from the dropdown that can access the secret ID from the previous step.

       If you don't have existing IAM role, choose **Create and use new IAM role**. Enter the new name for your role for **IAM role name. You can see the permissions associated with this role in the link below.**
4. Under the **View target RDS database** section:
    1. Confirm the settings of your target database in the section.
    2. For **Secret**, choose **Create and use a new secret** if you don't have an existing secret that holds your target database credentials.

       If you have an existing secret, select the secret from the dropdown.

3. For **IAM role for secret**, select an IAM role that can access the secret from the previous step. You can also create a new IAM role if you don't have existing IAM role.

   If the dropdown doesn't populate the IAM roles, specify the **IAM role ARN** in the format `arn:aws:iam:`*`account_id`*`:role/`*`roleName`*.

5. Under the **Configure data migration** section:

   1. Select the type of data migration by selecting between **Full load**, **Full load and change data capture (CDC)**, or **Change data capture (CDC)**. For more information about these options, see Overview.

      You can't modify the migration type afer the migration starts.

   2. For **IAM role for data migration**, if you have an existing IAM role, select **Use an existing IAM role** and choose an IAM role from the dropdown that grants DMS the permissions to create the resources required for the migration. If you don't have existing IAM role, choose **Create and use new IAM role**.

   > **Note**
   >
   > If role manager is enabled in your account, Amazon RDS attaches the roles for you, and the role options described here (for source secret, target secret, and data migration) are replaced by a **Customize** option. To use a different role, choose **Customize**. For more information, see IAM role creation in the *IAM User Guide*.

6. Confirm that the **View migration settings** tab shows the required settings for your data migration to be set up successfully.
7. Select **Migrate** to complete the migration set up.

After completing these steps, you can see the resources being set up for the data migration by choosing **View details** in the progress banner in the console. Once the required resources are set up, the migration automatically starts. If you create

To migrate multiple databases into the target database, start this process again with details about the new EC2 database.

Managing data migrations

After using the **Migrate data from EC2 database** action from the RDS console, Aurora starts the migration automatically.

If you used the Amazon DMS console to create the migration resources, you can start the migration process.

Starting the data migration

Follow these steps to start data migration:

Starting a data migration

1. Choose the target database on the **Databases** page in the RDS console.
2. In the database details page, choose the **Data migrations** tab.
3. Under the **Data migrations** tab, the **Associated data migrations** lists the available data migrations.

   Migrations set up using the Aurora console start automatically once the required resources are set up.

   Migrations set up using the DMS console are set to **Ready**.

   To begin these migrations, select the **Actions** drop down and select **Start**.
4. This begins the data migration for your EC2 database.

Stopping the data migration

For data migrations whose replication type is full load, stopping the migration causes the process to stop and can't be resumed. Once stopped, you must restart the migration.

For migrations with replication type set to change data capture (CDC) or full load and CDC, you can stop the continuous replication process, and resume the process later.

Stopping a data migration

1. Choose the target database on the **Databases** page in the RDS console.
2. In the database details page, choose the **Data migrations** tab.

3. Under the **Data migrations** tab, the **Associated data migrations** lists the ongoing data migrations.

   To stop a migration, select a data migration and select **Stop** in the **Actions** drop down.

4. This stops the data migration for your EC2 database.

Resuming the data migration

For data migrations whose replication type is full load and change data capture (CDC) or change data capture (CDC) migration, you can resume the CDC process from the last stop point.

Resuming a data migration

1. Choose the target database on the **Databases** page in the RDS console.
2. In the database details page, choose the **Data migrations** tab.
3. Under the **Data migrations** tab, the **Associated data migrations** lists the stopped data migrations.

   To resume a migration, select a data migration and select **Resume processing** in the **Actions** drop down.

4. This resume the data migration for your EC2 database.

Deleting the data migration

To delete an associated data migration, use the following instructions

Deleting a data migration

1. Choose the target database on the **Databases** page in the RDS console.
2. In the database details page, choose the **Data migrations** tab.
3. To delete a migration, select a data migration and select **Delete** in the **Actions** drop down.
4. This deletes the data migration.

Deleting a data migration that was in progress doesn't impact any data that has already been loaded to the target database.

Restarting the data migration

To restart an associated data migration from a CDC start point, use the following instructions

Restarting a data migration

1. Choose the target database on the **Databases** page in the RDS console.
2. In the database details page, choose the **Data migrations** tab.
3. To restart a migration, select a data migration and select **Restart** in the **Actions** drop down.
4. This restarts the data migration from a CDC start point.

Restarting a data migration that was in progress doesn't impact any data that has already been loaded to the target database.

Monitoring your data migrations

After the data migrations starts, you can monitor its status and progress. Data migrations of large data sets take hours to complete. To maintain the reliability, availability, and high performance of your data migration, monitor its progress regularly.

To check the status and progress of your data migration

1. Choose the target database on the **Databases** page in the RDS console.
2. In the database details page, choose the **Data migrations** tab.
3. The **Associated data migrations** section lists your data migrations. Check the **Status** column.
4. For running data migrations, the **Migration process** column displays the percentage of migrated data.
5. To monitor the process in CloudWatch, use the link in the in **CloudWatch** column.

Migration statuses

For each data migration that you run, the Aurora console displays the **Status**. The following list includes the statuses:

- `Ready`: The data migration is ready to start.
- `Starting`: Aurora is creating the serverless environment for your data migration.
- `Load running`: Aurora is performing the full load migration.

- `Load complete, replication ongoing`: Aurora completed the full load and now replicates the ongoing changes. This status only applies for full load and CDC type migrations.
- `Replication ongoing`: Aurora is replicating ongoing changes. This status only applies to CDC type migrations.
- `Stopping`: Aurora is stopping the data migrations. This status applies when you choose to stop the data migration from the **Actions** menu.
- `Stopped`: Aurora has stopped the data migration.
- `Failed`: The data migration has failed. For more information, see the log files.
- `Restarting`: The data migration has restarted an ongoing data replication from a CDC start point.

Tutorial: Creating a MySQL DB cluster with a custom parameter group

In this tutorial, you create a MySQL DB cluster with a custom parameter group. For more information about parameter groups, see DB cluster parameter groups for Amazon Aurora DB clusters.

> **Important**
>
> There's no charge for creating an Amazon account. However, by completing this tutorial, you might incur costs for the Amazon resources you use. You can delete these resources after you complete the tutorial if they are no longer needed.

To create a DB cluster with custom configurations and settings, you can use custom parameter groups. Custom parameter groups are particularly helpful if you work with multiple databases and want to uniformly configure settings for them.

By completing these steps, you learn:

- How to use Amazon Aurora to create a MySQL DB cluster with a custom parameter group.
- How to use specific parameters for MySQL DB clusters.

To complete this tutorial, perform the following tasks:

1. Create a DB cluster parameter group with the MySQL parameter `default_password_lifetime`.
2. Create a MySQL DB cluster with the custom DB cluster parameter group that you created.

Topics

- Prerequisites
- Create an Amazon Aurora DB cluster parameter group
- Modify parameter value in your custom parameter group
- Create MySQL DB cluster with a DB cluster parameter group

Prerequisites

This tutorial requires you to have an Amazon Web Services account and a user with administrative access. If you don't already have those set up, complete the steps in the following sections:

- Sign up for an Amazon Web Services account
- Secure IAM users

Create an Amazon Aurora DB cluster parameter group

In this tutorial, you learn how to create a custom parameter group with default_password_lifetime for a MySQL DB cluster in the console. The `default_password_lifetime` parameter controls the number of days before the client password automatically expires. For more information on other parameters available for MySQL DB clusters, see Aurora MySQL configuration parameters .

To create a parameter group

1. Open the Amazon RDS console and choose **Parameter groups**.
2. For **Custom parameter groups**, choose **Create parameter group**.
3. Set the parameter group details.
    1. Enter a name for the parameter group.
    2. Enter a description of the parameter group.
    3. For **Engine type**, choose **Aurora MySQL.**
    4. For **Parameter group family**, choose **aurora-mysql8.0.**
    5. For **Type**, choose **DB cluster parameter group.**
4. Choose **Create**.

The new DB cluster parameter group appears on the **Parameter groups** page in the Amazon RDS console. The following steps illustrate how to modify parameter values to customize your parameter group.

Modify parameter value in your custom parameter group

Use the following steps to modify the parameter value in the parameter group that you created in Create an Amazon Aurora DB cluster parameter group.

To modify parameter values in your parameter group

1. Open the Amazon RDS console and choose **Parameter groups**.
2. For **Custom parameter groups**, choose the name of the DB cluster parameter group you created.
3. Choose **Edit**.
4. In the **Filter parameters** search box, search for the custom parameter `default_password_lifetime`.
5. Select the check box next to the parameter and enter a value the number of days to set for this password lifetime parameter.
6. Select **Save Changes**.

The custom parameter group is now available to associate with Amazon Aurora for MySQL 8.0 DB cluster.

Create MySQL DB cluster with a DB cluster parameter group

Finally, create a MySQL DB cluster with the custom parameter group that you made in the previous steps. The following steps show how to create the MySQL DB cluster with your custom parameter group.

To create a DB cluster with a custom parameter and new option group

1. Open the Amazon RDS console and choose **Databases**.
2. Choose **Create database**.
3. For **Choose a database creation method**, choose **Standard Create**.
4. For **Engine options**, choose **Aurora (MySQL Compatible)**.
5. Select **Additional Configuration**.
   - For **Initial database name**, choose a name for your DB cluster.
   - Under the **DB cluster parameter group** dropdown, select the name of the DB cluster parameter group you created previously.
6. For this tutorial, you can leave the default settings for any other DB settings or modify them as required.
7. Choose **Create database**.

RDS creates a new MySQL DB cluster with a custom parameter group group. To see more information on this database, see the **Databases** page of the Amazon RDS console.

In this tutorial, you configured a MySQL DB cluster with tailored settings using a custom parameter group. This newly created MySQL DB cluster manages the user password lifetime by using the parameter `default_password_lifetime`. To optimize your database, you can apply additional setting in your custom parameter group and add options.

After you have finished creating your customized DB cluster, you should delete your resources to avoid incurring unwanted costs. To delete a DB cluster, follow the instructions in Deleting Aurora DB clusters and DB instances.

Managing an Amazon Aurora DB cluster

This section shows how to manage and maintain your Aurora DB cluster. Aurora involves clusters of database servers that are connected in a replication topology. Thus, managing Aurora often involves deploying changes to multiple servers and making sure that all Aurora Replicas are keeping up with the source server. Because Aurora transparently scales the underlying storage as your data grows, managing Aurora requires relatively little management of disk storage. Likewise, because Aurora automatically performs continuous backups, an Aurora cluster does not require extensive planning or downtime for performing backups.

Topics

- Stopping and starting an Amazon Aurora DB cluster
- Automatically connecting an EC2 instance and an Aurora DB cluster
- Automatically connecting a Lambda function and an Aurora DB cluster
- Modifying an Amazon Aurora DB cluster
- Adding Aurora Replicas to a DB cluster
- Managing performance and scaling for Aurora DB clusters
- Cloning a volume for an Amazon Aurora DB cluster
- Integrating Aurora with other Amazon services
- Maintaining an Amazon Aurora DB cluster
- Rebooting an Amazon Aurora DB cluster or Amazon Aurora DB instance
- Failing over an Amazon Aurora DB cluster
- Deleting Aurora DB clusters and DB instances
- Tagging Amazon Aurora andAmazon RDS resources
- Amazon Resource Names (ARNs) in Amazon RDS
- Amazon Aurora updates

Stopping and starting an Amazon Aurora DB cluster

Stopping and starting Aurora DB clusters helps you manage costs for development and test environments. You can temporarily stop all the DB instances in your cluster, instead of setting up and tearing down all the DB instances each time that you use the cluster.

Topics

- Overview of stopping and starting an Aurora DB cluster
- Limitations for stopping and starting Aurora DB clusters
- Stopping an Aurora DB cluster
- Possible operations while an Aurora DB cluster is stopped
- Starting an Aurora DB cluster

Overview of stopping and starting an Aurora DB cluster

During periods where you don't need an Aurora DB cluster, you can stop all instances in that cluster at once. You can start the cluster again anytime you need to use it. Starting and stopping simplifies the setup and teardown processes for clusters used for development, testing, or similar activities that don't require continuous availability. You can perform all the Amazon Web Services Management Console procedures involved with only a single action, regardless of how many instances are in the cluster.

While your DB cluster is stopped, you're charged only for cluster storage, manual snapshots, and automated backup storage within your specified retention window. You aren't charged for any DB instance hours.

> **Important**
>
> You can stop a DB cluster for up to seven days. If you don't manually start your DB cluster after seven days, your DB cluster is automatically started so that it doesn't fall behind any required maintenance updates.

To minimize charges for a lightly loaded Aurora cluster, you can stop the cluster instead of deleting all of its Aurora Replicas. For clusters with more than one or two instances, frequently deleting and recreating the DB instances is only practical using the Amazon CLI or Amazon RDS API. Such a

sequence of operations can also be difficult to perform in the right order, for example to delete all Aurora Replicas before deleting the primary instance to avoid activating the failover mechanism.

Don't use starting and stopping if you need to keep your DB cluster running but it has more capacity than you need. If your cluster is too costly or not very busy, delete one or more DB instances or change all your DB instances to a small instance class. You can't stop an individual Aurora DB instance.

The time to stop your DB cluster varies depending on factors such as DB instance classes, network state, DB engine type, and database state. The process can take several minutes. The Amazon RDS service performs the following actions:

- Shuts down the database engine processes.
- Shuts down the RDS platform processes.
- Terminates the underlying Amazon EC2 instances.

The time to restart your DB cluster varies depending on factors such as database size, DB instance classes, network state, DB engine type, and the database state when the cluster was shut down. The startup process can take minutes to hours, but usually takes several minutes. We recommend that you consider the variability in startup time when creating your availability plan.

To start the DB cluster, the service performs actions such as the following:

- Provisions the underlying Amazon EC2 instances.
- Starts the RDS platform processes.
- Starts the database engine processes.
- Recovers the DB instances (recovery occurs even after a normal shutdown).

Limitations for stopping and starting Aurora DB clusters

Some Aurora clusters can't be stopped and started:

- You can only stop and start a cluster that's part of an Aurora global database if it's the only cluster in the global database.
- You can't stop and start a cluster that has a cross-Region read replica.
- You can't stop and start a cluster that is part of a blue/green deployment.

Stopping an Aurora DB cluster

To use an Aurora DB cluster or perform administration, you always begin with a running Aurora DB cluster, then stop the cluster, and then start the cluster again. While your cluster is stopped, you are charged for cluster storage, manual snapshots, and automated backup storage within your specified retention window, but not for DB instance hours.

The stop operation stops the Aurora Replica instances first, then the primary instance, to avoid activating the failover mechanism.

Console

To stop an Aurora cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose a cluster. You can perform the stop operation from this page, or navigate to the details page for the DB cluster that you want to stop.
3. For **Actions**, choose **Stop temporarily**.
4. In the **Stop DB cluster temporarily** window, select the acknowledgement that the DB cluster will restart automatically after 7 days.
5. Choose **Stop temporarily** to stop the DB cluster, or choose **Cancel** to cancel the operation.

Amazon CLI

To stop a DB instance by using the Amazon CLI, call the stop-db-cluster command with the following parameters:

- `--db-cluster-identifier` – the name of the Aurora cluster.

Example

```
aws rds stop-db-cluster --db-cluster-identifier mydbcluster
```

RDS API

To stop a DB instance by using the Amazon RDS API, call the StopDBCluster operation with the following parameter:

- `DBClusterIdentifier` – the name of the Aurora cluster.

Possible operations while an Aurora DB cluster is stopped

While an Aurora cluster is stopped, you can do a point-in-time restore to any point within your specified automated backup retention window. For details about doing a point-in-time restore, see Restoring data.

You can't modify the configuration of an Aurora DB cluster, or any of its DB instances, while the cluster is stopped. You also can't add or remove DB instances from the cluster, or delete the cluster if it still has any associated DB instances. You must start the cluster before performing any such administrative actions.

Stopping a DB cluster removes pending actions, except for the DB cluster parameter group or for the DB parameter groups of the DB cluster instances.

Aurora applies any scheduled maintenance to your stopped cluster after it's started again. Remember that after seven days, Aurora automatically starts any stopped clusters so that they don't fall too far behind in their maintenance status.

Aurora also doesn't perform any automated backups, because the underlying data can't change while the cluster is stopped. Aurora doesn't extend the backup retention period while the cluster is stopped.

Starting an Aurora DB cluster

You always start an Aurora DB cluster beginning with an Aurora cluster that is already in the stopped state. When you start the cluster, all its DB instances become available again. The cluster keeps its configuration settings such as endpoints, parameter groups, and VPC security groups.

Starting your DB cluster usually takes several minutes.

Console

To start an Aurora cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose a cluster. You can perform the start operation from this page, or navigate to the details page for the DB cluster that you want to start.
3. For **Actions**, choose **Start**.

Amazon CLI

To start a DB cluster by using the Amazon CLI, call the start-db-cluster command with the following parameters:

- `--db-cluster-identifier` – the name of the Aurora cluster. This name is either a specific cluster identifier you chose when creating the cluster, or the DB instance identifier you chose with `-cluster` appended to the end.

Example

```
aws rds start-db-cluster --db-cluster-identifier mydbcluster
```


RDS API

To start an Aurora DB cluster by using the Amazon RDS API, call the StartDBCluster operation with the following parameter:

- `DBCluster` – the name of the Aurora cluster. This name is either a specific cluster identifier you chose when creating the cluster, or the DB instance identifier you chose with `-cluster` appended to the end.

Automatically connecting an EC2 instance and an Aurora DB cluster

You can use the Amazon RDS console to simplify setting up a connection between an Amazon Elastic Compute Cloud (Amazon EC2) instance and an Aurora DB cluster. Often, your DB cluster is in a private subnet and your EC2 instance is in a public subnet within a VPC. You can use a SQL client on your EC2 instance to connect to your DB cluster. The EC2 instance can also run web servers or applications that access your private DB cluster.

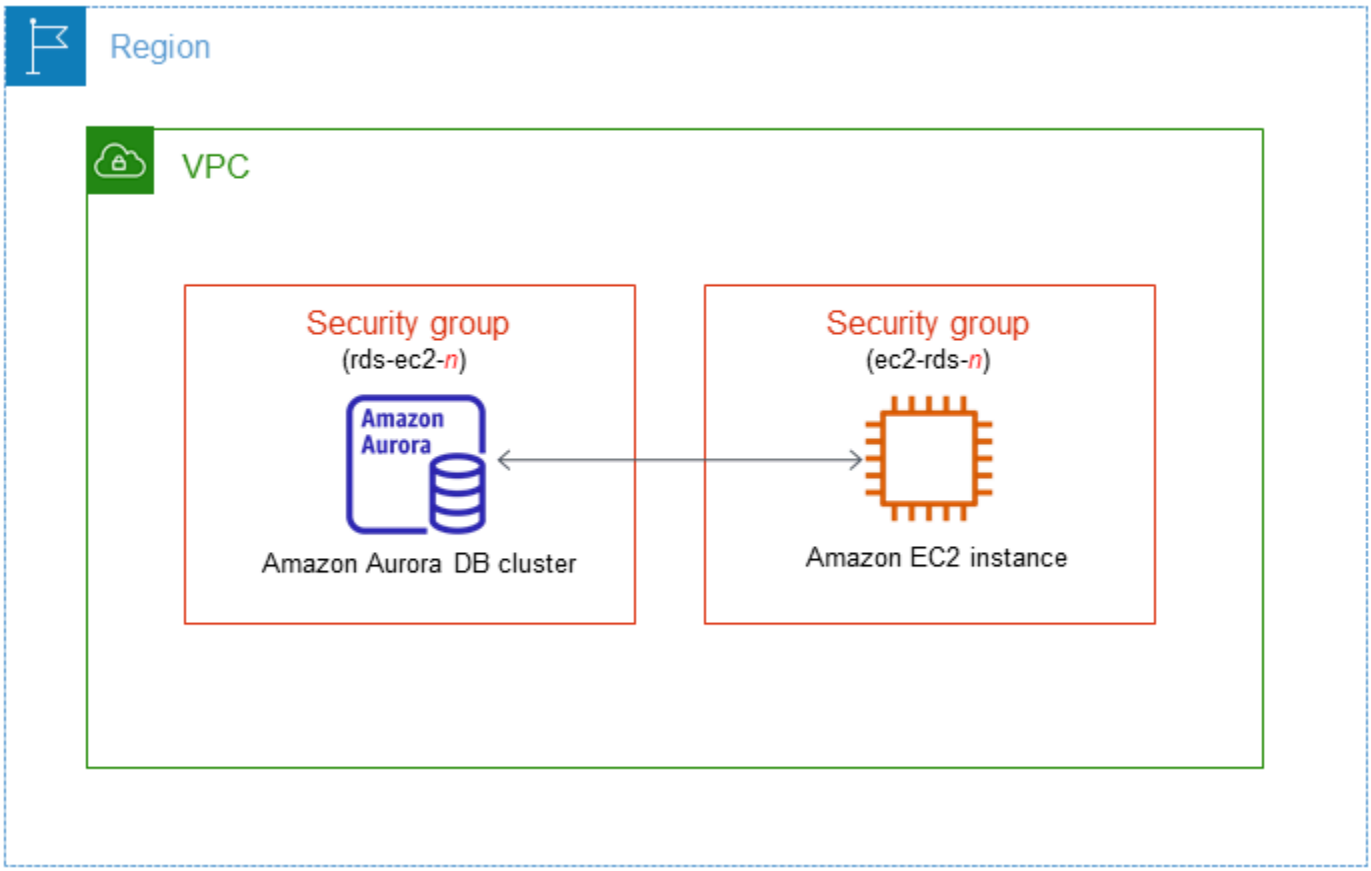

If you want to connect to an EC2 instance that isn't in the same VPC as the Aurora DB cluster, see the scenarios in Scenarios for accessing a DB cluster in a VPC.

Topics

- Overview of automatic connectivity with an EC2 instance
- Automatically connecting an EC2 instance and an Aurora DB cluster
- Viewing connected compute resources
- Connecting to a DB instance that is running a specific DB engine

Overview of automatic connectivity with an EC2 instance

When you set up a connection between an EC2 instance and an Aurora DB cluster, Amazon RDSautomatically configures the VPC security group for your EC2 instance and for your DB cluster.

The following are requirements for connecting an EC2 instance with an Aurora DB cluster:

- The EC2 instance must exist in the same VPC as the DB cluster.

  If no EC2 instances exist in the same VPC, then the console provides a link to create one.
- Currently, the DB cluster can't be an Aurora Serverless DB cluster or part of an Aurora global database.
- The user who sets up connectivity must have permissions to perform the following Amazon EC2 operations:
  - `ec2:AuthorizeSecurityGroupEgress`
  - `ec2:AuthorizeSecurityGroupIngress`
  - `ec2:CreateSecurityGroup`
  - `ec2:DescribeInstances`
  - `ec2:DescribeNetworkInterfaces`
  - `ec2:DescribeSecurityGroups`
  - `ec2:ModifyNetworkInterfaceAttribute`
  - `ec2:RevokeSecurityGroupEgress`

If the DB instance and EC2 instance are in different Availability Zones, your account may incur cross-Availability Zone costs.

When you set up a connection to an EC2 instance, Amazon RDS acts according to the current configuration of the security groups associated with the DB cluster and EC2 instance, as described in the following table.

Current RDS security group configuration	Current EC2 security group configuration	RDS action
There are one or more security groups associate d with the DB cluster with	There are one or more security groups associated with the EC2 instance with	RDS takes no action.

Current RDS security group configuration	Current EC2 security group configuration	RDS action
a name that matches the pattern `rds-ec2-`*n* (where *n* is a number). A security group that matches the pattern hasn't been modified. This security group has only one inbound rule with the VPC security group of the EC2 instance as the source.	a name that matches the pattern `ec2-rds-`*n* (where *n* is a number). A security group that matches the pattern hasn't been modified. This security group has only one outbound rule with the VPC security group of the DB cluster as the source.	A connection was already configured automatically between the EC2 instance and DB cluster. Because a connection already exists between the EC2 instance and the RDS database, the security groups aren't modified.

Current RDS security group configuration	Current EC2 security group configuration	RDS action
Either of the following conditions apply: • There is no security group associated with the DB cluster with a name that matches the pattern `rds-ec2-`*n*. • There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-ec2-`*n*. However, Amazon RDS can't use any of these security groups for the connection with the EC2 instance. Amazon RDS can't use a security group that doesn't have one inbound rule with the VPC security group of the EC2 instance as the source. Amazon RDS also can't use a security group that has been modified. Examples of modifications include adding a rule or changing the port of an existing rule.	Either of the following conditions apply: • There is no security group associated with the EC2 instance with a name that matches the pattern `ec2-rds-`*n*. • There are one or more security groups associated with the EC2 instance with a name that matches the pattern `ec2-rds-`*n*. However, Amazon RDS can't use any of these security groups for the connection with the DB cluster. Amazon RDS can't use a security group that doesn't have one outbound rule with the VPC security group of the DB cluster as the source. Amazon RDS also can't use a security group that has been modified.	RDS action: create new security groups

Current RDS security group configuration	Current EC2 security group configuration	RDS action
There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-ec2-`*n*. A security group that matches the pattern hasn't been modified. This security group has only one inbound rule with the VPC security group of the EC2 instance as the source.	There are one or more security groups associated with the EC2 instance with a name that matches the pattern `ec2-rds-`*n*. However, Amazon RDS can't use any of these security groups for the connection with the DB cluster. Amazon RDS can't use a security group that doesn't have one outbound rule with the VPC security group of the DB cluster as the source. Amazon RDS also can't use a security group that has been modified.	RDS action: create new security groups
There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-ec2-`*n*. A security group that matches the pattern hasn't been modified. This security group has only one inbound rule with the VPC security group of the EC2 instance as the source.	A valid EC2 security group for the connection exists, but it is not associated with the EC2 instance. This security group has a name that matches the pattern `ec2-rds-`*n*. It hasn't been modified. It has only one outbound rule with the VPC security group of the DB cluster as the source.	RDS action: associate EC2 security group

Current RDS security group configuration	Current EC2 security group configuration	RDS action
Either of the following conditions apply: • There is no security group associated with the DB cluster with a name that matches the pattern `rds-ec2-`*n*. • There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-ec2-`*n*. However, Amazon RDS can't use any of these security groups for the connection with the EC2 instance. Amazon RDS can't use a security group that doesn't have one inbound rule with the VPC security group of the EC2 instance as the source. Amazon RDS also can't use security group that has been modified.	There are one or more security groups associated with the EC2 instance with a name that matches the pattern `ec2-rds-`*n*. A security group that matches the pattern hasn't been modified. This security group has only one outbound rule with the VPC security group of the DB cluster as the source.	RDS action: create new security groups

RDS action: create new security groups

Amazon RDS takes the following actions:

- Creates a new security group that matches the pattern `rds-ec2-`*n*. This security group has an inbound rule with the VPC security group of the EC2 instance as the source. This security group is associated with the DB cluster and allows the EC2 instance to access the DB cluster.

- Creates a new security group that matches the pattern `ec2-rds-`*n*. This security group has an outbound rule with the VPC security group of the DB cluster as the target. This security group is associated with the EC2 instance and allows the EC2 instance to send traffic to the DB cluster.

RDS action: associate EC2 security group

Amazon RDS associates the valid, existing EC2 security group with the EC2 instance. This security group allows the EC2 instance to send traffic to the DB cluster.

Automatically connecting an EC2 instance and an Aurora DB cluster

Before setting up a connection between an EC2 instance and an Aurora DB cluster, make sure you meet the requirements described in Overview of automatic connectivity with an EC2 instance.


If you make changes to security groups after you configure connectivity, the changes might affect the connection between the EC2 instance and the Aurora DB cluster.

> **Note**
>
> You can only set up a connection between an EC2 instance and an Aurora DB cluster automatically by using the Amazon Web Services Management Console. You can't set up a connection automatically with the Amazon CLI or RDS API.

To connect an EC2 instance and an Aurora DB cluster automatically

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB cluster.
3. From **Actions**, choose **Set up EC2 connection**.


   The **Set up EC2 connection** page appears.
4. On the **Set up EC2 connection** page, choose the EC2 instance.

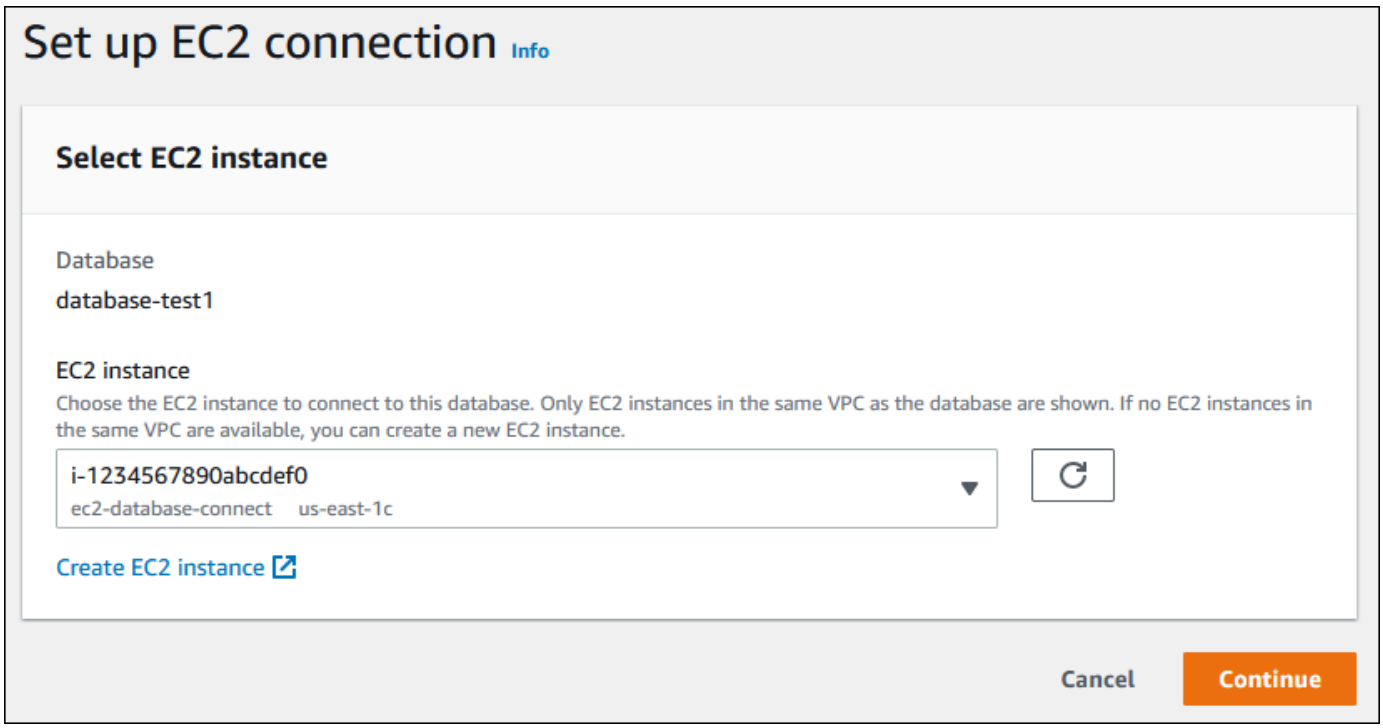

If no EC2 instances exist in the same VPC, choose **Create EC2 instance** to create one. In this case, make sure the new EC2 instance is in the same VPC as the DB cluster.

5. Choose **Continue**.

   The **Review and confirm** page appears.

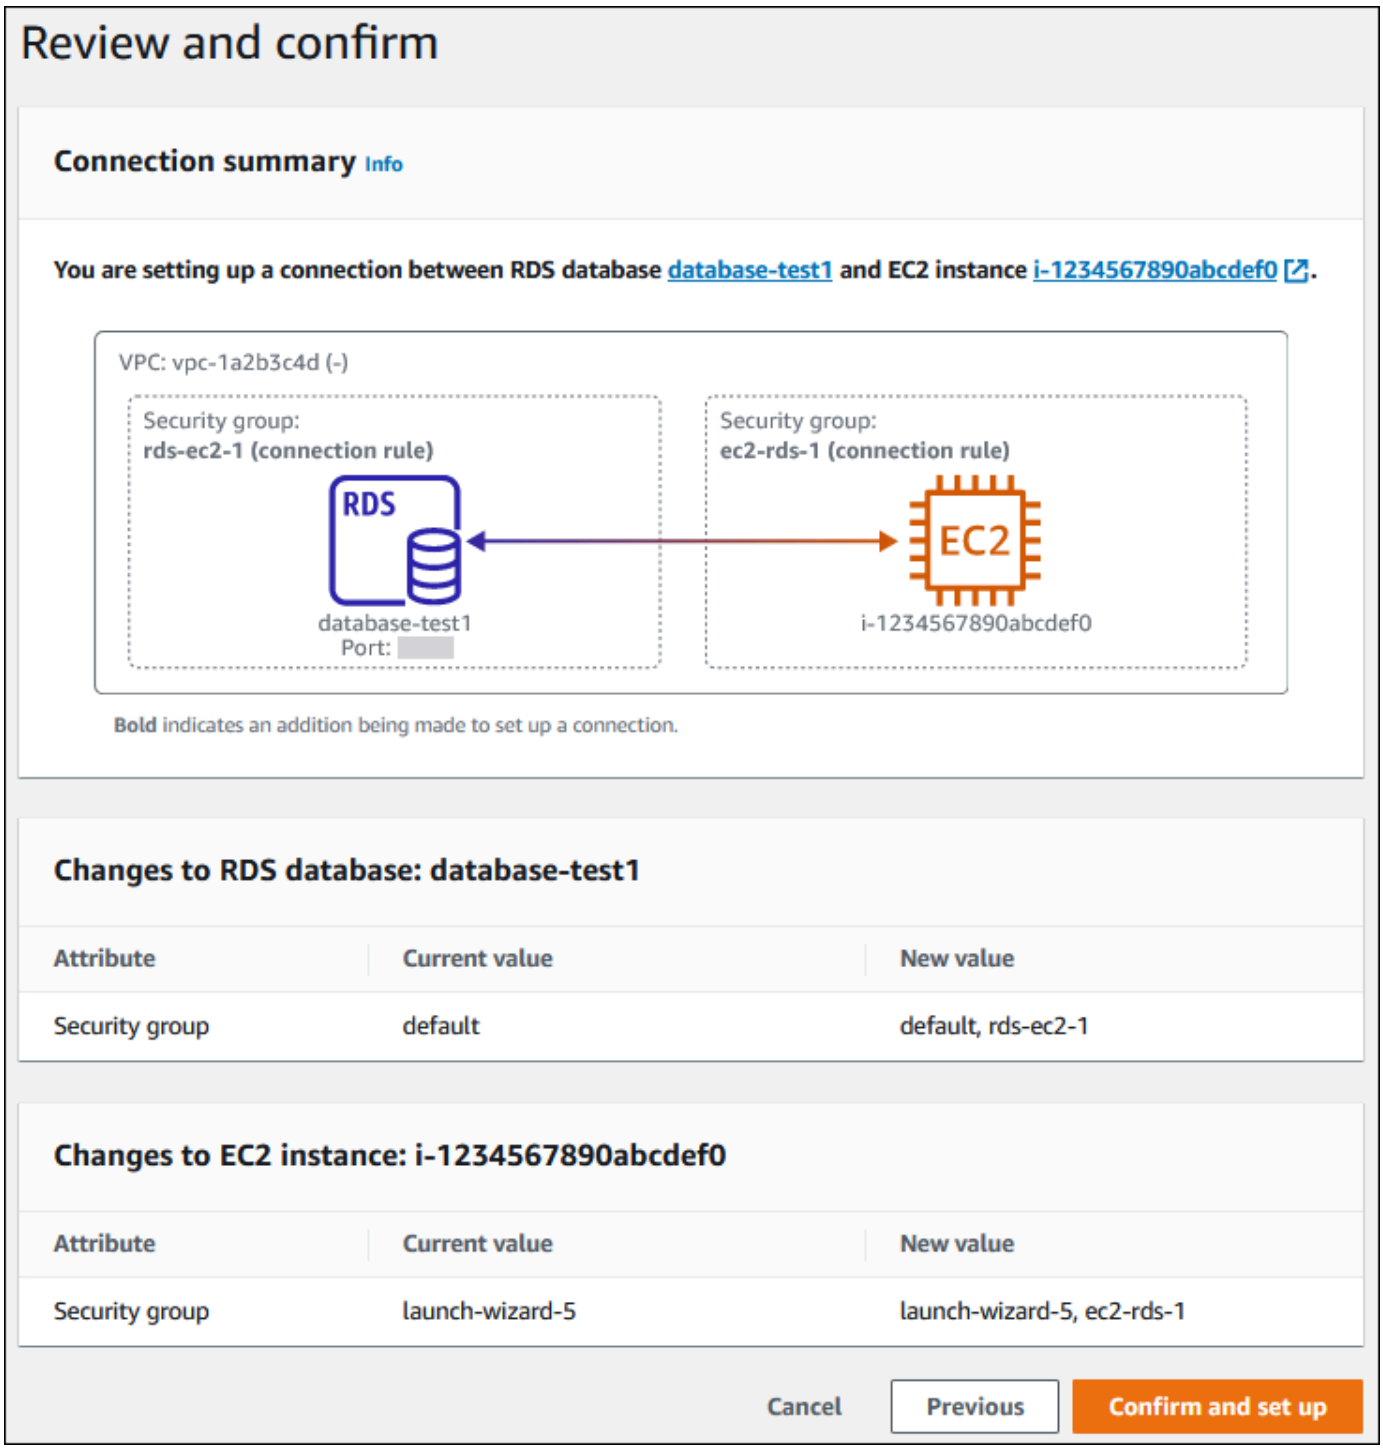

6. On the **Review and confirm** page, review the changes that RDS will make to set up connectivity with the EC2 instance.

   If the changes are correct, choose **Confirm and set up**.

   If the changes aren't correct, choose **Previous** or **Cancel**.

Viewing connected compute resources

You can use the Amazon Web Services Management Console to view the compute resources that are connected to an Aurora DB cluster. The resources shown include compute resource connections that were set up automatically. You can set up connectivity with compute resources automatically in the following ways:

- You can select the compute resource when you create the database.

  For more information, see Creating an Amazon Aurora DB cluster.
- You can set up connectivity between an existing database and a compute resource.

  For more information, see Automatically connecting an EC2 instance and an Aurora DB cluster.

The listed compute resources don't include ones that were connected to the database manually. For example, you can allow a compute resource to access a database manually by adding a rule to the VPC security group associated with the database.


For a compute resource to be listed, the following conditions must apply:

- The name of the security group associated with the compute resource matches the pattern `ec2-rds-`*n* (where *n* is a number).
- The security group associated with the compute resource has an outbound rule with the port range set to the port that the DB cluster uses.
- The security group associated with the compute resource has an outbound rule with the source set to a security group associated with the DB cluster.
- The name of the security group associated with the DB cluster matches the pattern `rds-ec2-`*n* (where *n* is a number).
- The security group associated with the DB cluster has an inbound rule with the port range set to the port that the DB cluster uses.
- The security group associated with the DB cluster has an inbound rule with the source set to a security group associated with the compute resource.

To view compute resources connected to an Aurora DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

2. In the navigation pane, choose **Databases**, and then choose the name of the DB cluster.
3. On the **Connectivity & security** tab, view the compute resources in the **Connected compute resources**.

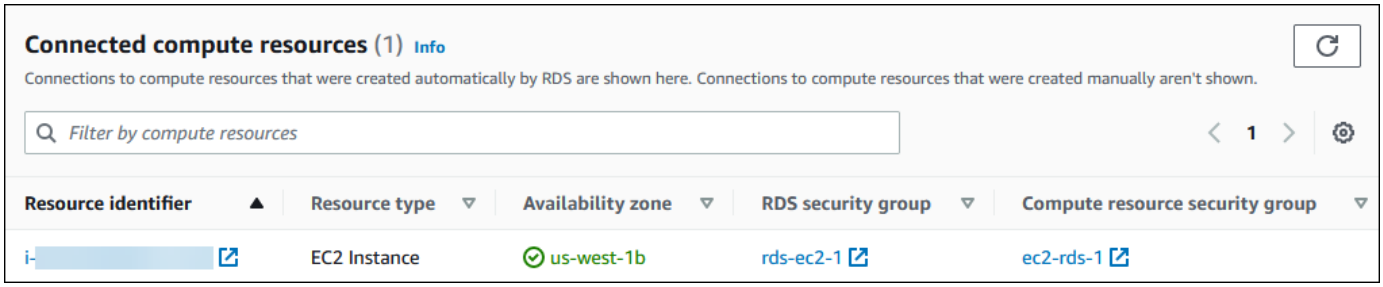

Connecting to a DB instance that is running a specific DB engine


For information about connecting to a DB instance that is running a specific DB engine, follow the instructions for your DB engine:

- Connecting to an Amazon Aurora MySQL DB cluster
- Connecting to an Amazon Aurora PostgreSQL DB cluster

Automatically connecting a Lambda function and an Aurora DB cluster

You can use the Amazon RDS console to simplify setting up a connection between a Lambda function and an Aurora DB cluster. Often, your DB cluster is in a private subnet within a VPC. The Lambda function can be used by applications to access your private DB cluster.


The following image shows a direct connection between your DB cluster and your Lambda function.

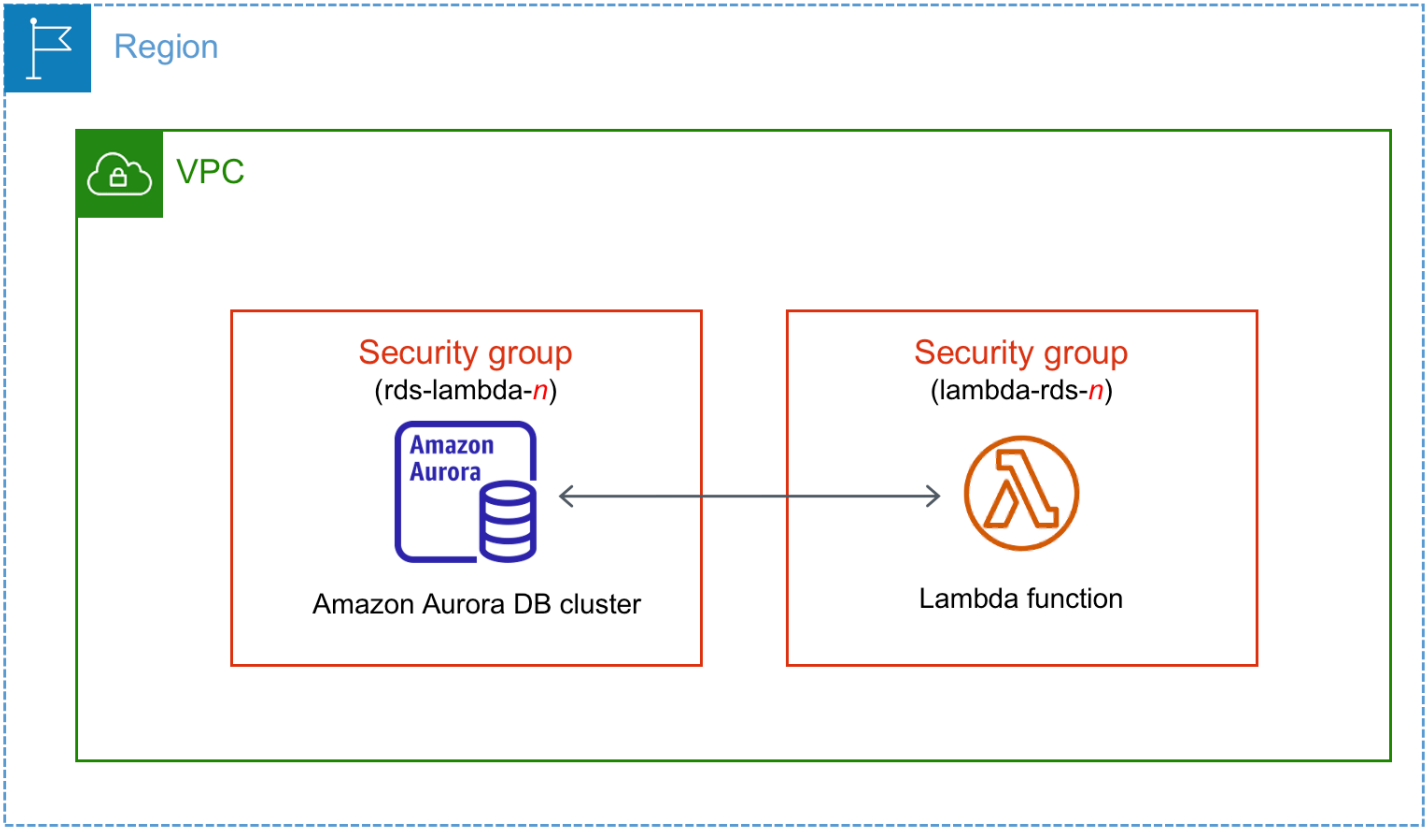

You can set up the connection between your Lambda function and your DB cluster through RDS Proxy to improve your database performance and resiliency. Often, Lambda functions make frequent, short database connections that benefit from connection pooling that RDS Proxy offers. You can take advantage of any Amazon Identity and Access Management (IAM) authentication that you already have for Lambda functions, instead of managing database credentials in your Lambda application code. For more information, see Amazon RDS Proxy for Aurora.

When you use the console to connect with an existing proxy, Amazon RDS updates the proxy security group to allow connections from your DB cluster and Lambda function.

You can also create a new proxy from the same console page. When you create a proxy in the console, to access the DB cluster, you must input your database credentials or select an Amazon Secrets Manager secret.

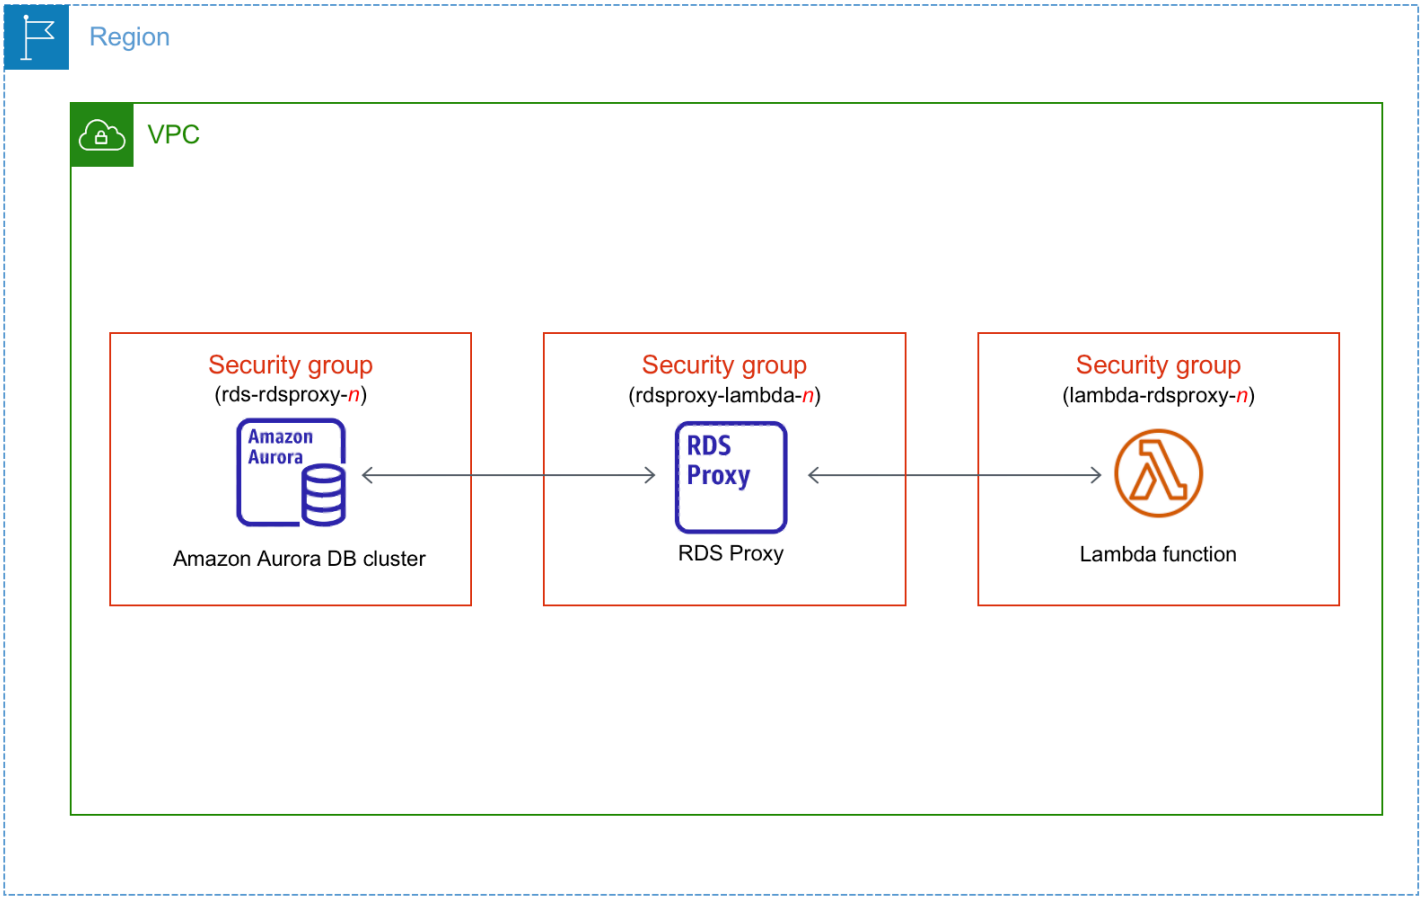

Tip

To quickly connect a Lambda function to an Aurora DB cluster, you can also use the in-console guided wizard. To open the wizard, do the following:

1. Open the Functions page of the Lambda console.
2. Select the function you want to connect a database to.
3. On the **Configuration** tab, select **RDS databases**.
4. Choose **Connect to RDS database**.

After you've connected your function to a database, you can create a proxy by choosing **Add proxy**.

Topics

- Overview of automatic connectivity with a Lambda function
- Automatically connecting a Lambda function and an Aurora DB cluster
- Viewing connected compute resources

Overview of automatic connectivity with a Lambda function

The following are requirements for connecting a Lambda function with an Aurora DB cluster:

- The Lambda function must exist in the same VPC as the DB cluster.
- Currently, the DB cluster can't be an Aurora Serverless DB cluster or part of an Aurora global database.
- The user who sets up connectivity must have permissions to perform the following Amazon RDS, Amazon EC2, Lambda, Secrets Manager, and IAM operations:
  - Amazon RDS
    - `rds:CreateDBProxies`
    - `rds:DescribeDBClusters`
    - `rds:DescribeDBProxies`
    - `rds:ModifyDBCluster`
    - `rds:ModifyDBProxy`
    - `rds:RegisterProxyTargets`
  - Amazon EC2
    - `ec2:AuthorizeSecurityGroupEgress`
    - `ec2:AuthorizeSecurityGroupIngress`
    - `ec2:CreateSecurityGroup`
    - `ec2:DeleteSecurityGroup`
    - `ec2:DescribeSecurityGroups`
    - `ec2:RevokeSecurityGroupEgress`
    - `ec2:RevokeSecurityGroupIngress`
  - Lambda
    - `lambda:CreateFunctions`
    - `lambda:ListFunctions`

    - `lambda:UpdateFunctionConfiguration`
- Secrets Manager
    - `secretsmanager:CreateSecret`
    - `secretsmanager:DescribeSecret`
- IAM
    - `iam:AttachPolicy`
    - `iam:CreateRole`
    - `iam:CreatePolicy`
- Amazon KMS
    - `kms:describeKey`

> **Note**
>
> If the DB cluster and Lambda function are in different Availability Zones, your account might incur cross-Availability Zone costs.

When you set up a connection between a Lambda function and an Aurora DB cluster, Amazon RDS configures the VPC security group for your function and for your DB cluster. If you use RDS Proxy, then Amazon RDS also configures the VPC security group for the proxy. Amazon RDS acts according to the current configuration of the security groups associated with the DB cluster, Lambda function, and proxy, as described in the following table.

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-lambda-` *n* or if	There are one or more security groups associated with the Lambda function with a name that matches the pattern `lambda-rds-` *n*	There are one or more security groups associated with the proxy with a name that matches the pattern `rdsproxy-`	Amazon RDS takes no action. A connection was already configure d automatically between the Lambda function, the proxy

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
a proxy is already connected to your DB cluster, RDS checks if the `TargetHealth` of an associated proxy is `AVAILABLE`. A security group that matches the pattern hasn't been modified. This security group has only one inbound rule with the VPC security group of the Lambda function or proxy as the source.	or `lambda-rdsproxy-`*n* (where *n* is a number). A security group that matches the pattern hasn't been modified. This security group has only one outbound rule with either the VPC security group of the DB cluster or the proxy as the destination.	`lambda-`*n* (where *n* is a number). A security group that matches the pattern hasn't been modified. This security group has inbound and outbound rules with the VPC security groups of the Lambda function and the DB cluster.	(optional), and DB cluster. Because a connection already exists between the function, proxy, and the database, the security groups aren't modified.

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
Either of the following conditions apply: • There is no security group associated with the DB cluster with a name that matches the pattern `rds-lambda-`*n* or if the `TargetHealth` of an associated proxy is `AVAILABLE`. • There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-lambda-`*n* or if the `TargetHealth` of an associated proxy is `AVAILABLE`. However, none of these security groups can be used for the connectio	Either of the following conditions apply: • There is no security group associated with the Lambda function with a name that matches the pattern `lambda-rds-`*n* or `lambda-rdsproxy-`*n*. • There are one or more security groups associated with the Lambda function with a name that matches the pattern `lambda-rds-`*n* or `lambda-rdsproxy-`*n*. However, Amazon RDS can't use any of these security groups for the connection with the DB cluster. Amazon RDS can't use a security group	Either of the following conditions apply: • There is no security group associated with the proxy with a name that matches the pattern `rdsproxy-lambda-`*n*. • There are one or more security groups associated with the proxy with a name that matches `rdsproxy-lambda-`*n*. However, Amazon RDS can't use any of these security groups for the connection with the DB cluster or Lambda function. Amazon RDS can't use a security group that doesn't have inbound and	RDS action: create new security groups

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
n with the Lambda function. Amazon RDS can't use a security group that doesn't have one inbound rule with the VPC security group of the Lambda function or proxy as the source. Amazon RDS also can't use a security group that has been modified. Examples of modifications include adding a rule or changing the port of an existing rule.	that doesn't have one outbound rule with the VPC security group of the DB cluster or proxy as the destination. Amazon RDS also can't use a security group that has been modified.	outbound rules with the VPC security group of the DB cluster and the Lambda function. Amazon RDS also can't use a security group that has been modified.	

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-lambda-` *n* or if the `TargetHealth` of an associated proxy is `AVAILABLE` . A security group that matches the pattern hasn't been modified. This security group has only one inbound rule with the VPC security group of the Lambda function or proxy as the source.	There are one or more security groups associated with the Lambda function with a name that matches the pattern `lambda-rds-` *n* or `lambda-rdsproxy-` *n*. However, Amazon RDS can't use any of these security groups for the connection with the DB cluster. Amazon RDS can't use a security group that doesn't have one outbound rule with the VPC security group of the DB cluster or proxy as the destination. Amazon RDS also can't use a security group that has been modified.	There are one or more security groups associated with the proxy with a name that matches the pattern `rdsproxy-lambda-` *n*. However, Amazon RDS can't use any of these security groups for the connection with the DB cluster or Lambda function. Amazon RDS can't use a security group that doesn't have inbound and outbound rules with the VPC security group of the DB cluster and the Lambda function. Amazon RDS also can't use a security group that has been modified.	RDS action: create new security groups

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-lambda-` *n* or if the `TargetHealth` of an associated proxy is `AVAILABLE` . A security group that matches the pattern hasn't been modified. This security group has only one inbound rule with the VPC security group of the Lambda function or proxy as the source.	A valid Lambda security group for the connection exists, but it isn't associated with the Lambda function. This security group has a name that matches the pattern `lambda-rds-` *n* or `lambda-rdsproxy-` *n*. It hasn't been modified. It has only one outbound rule with the VPC security group of the DB cluster or proxy as the destination.	A valid proxy security group for the connection exists, but it isn't associated with the proxy. This security group has a name that matches the pattern `rdsproxy-lambda-` *n*. It hasn't been modified. It has inbound and outbound rules with the VPC security group of the DB cluster and the Lambda function.	RDS action: associate Lambda security group

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
Either of the following conditions apply: • There is no security group associated with the DB cluster with a name that matches the pattern `rds-lambda-` *n* or if the `TargetHealth` of an associated proxy is `AVAILABLE`. • There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-lambda-` *n* or if the `TargetHealth` of an associated proxy is `AVAILABLE`. However, Amazon RDS can't use any of these security groups for the connectio	There are one or more security groups associated with the Lambda function with a name that matches the pattern `lambda-rds-` *n* or `lambda-rdsproxy-` *n*. A security group that matches the pattern hasn't been modified. This security group has only one outbound rule with the VPC security group of the DB instance or proxy as the destination.	There are one or more security groups associated with the proxy with a name that matches the pattern `rdsproxy-lambda-` *n*. A security group that matches the pattern hasn't been modified. This security group has inbound and outbound rules with the VPC security group of the DB cluster and the Lambda function.	RDS action: create new security groups

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
n with the Lambda function or proxy. Amazon RDS can't use a security group that doesn't have one inbound rule with the VPC security group of the Lambda function or proxy as the source. Amazon RDS also can't use a security group that has been modified.			

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
Either of the following conditions apply: • There is no security group associated with the DB cluster with a name that matches the pattern `rds-lambda-`*n* or if the `TargetHealth` of an associated proxy is `AVAILABLE`. • There are one or more security groups associated with the DB cluster with a name that matches the pattern `rds-lambda-`*n* or if the `TargetHealth` of an associated proxy is `AVAILABLE`. However, Amazon RDS can't use any of these security groups for the connectio	Either of the following conditions apply: • There is no security group associated with the Lambda function with a name that matches the pattern `lambda-rds-`*n* or `lambda-rdsproxy-`*n*. • There are one or more security groups associated with the Lambda function with a name that matches the pattern `lambda-rds-`*n* or `lambda-rdsproxy-`*n*. However, Amazon RDS can't use any of these security groups for the connection with the DB DB cluster. Amazon RDS can't use a security group	Either of the following conditions apply: • There is no security group associated with the proxy with a name that matches the pattern `rdsproxy-lambda-`*n*. • There are one or more security groups associated with the proxy with a name that matches `rdsproxy-lambda-`*n*. However, Amazon RDS can't use any of these security groups for the connection with the DB cluster or Lambda function. Amazon RDS can't use a security group that doesn't have inbound and	RDS action: create new security groups

Current RDS security group configuration	Current Lambda security group configuration	Current proxy security group configuration	RDS action
n with the Lambda function or proxy. Amazon RDS can't use a security group that doesn't have one inbound rule with the VPC security group of the Lambda function or proxy as the source. Amazon RDS also can't use a security group that has been modified.	that doesn't have one outbound rule with the VPC security group of the DB cluster or proxy as the source. Amazon RDS also can't use a security group that has been modified.	outbound rules with the VPC security group of the DB cluster and the Lambda function. Amazon RDS also can't use a security group that has been modified.	

RDS action: create new security groups

Amazon RDS takes the following actions:

- Creates a new security group that matches the pattern `rds-lambda-`*n* or `rds-rdsproxy-`*n* (if you choose to use RDS Proxy). This security group has an inbound rule with the VPC security group of the Lambda function or proxy as the source. This security group is associated with the DB cluster and allows the function or proxy to access the DB cluster.
- Creates a new security group that matches the pattern `lambda-rds-`*n* or `lambda-rdsproxy-`*n*. This security group has an outbound rule with the VPC security group of the DB cluster or proxy as the destination. This security group is associated with the Lambda function and allows the function to send traffic to the DB cluster or send traffic through a proxy.
- Creates a new security group that matches the pattern `rdsproxy-lambda-`*n*. This security group has inbound and outbound rules with the VPC security group of the DB cluster and the Lambda function.

RDS action: associate Lambda security group

Amazon RDS associates the valid, existing Lambda security group with the Lambda function. This security group allows the function to send traffic to the DB cluster or send traffic through a proxy.

Automatically connecting a Lambda function and an Aurora DB cluster

You can use the Amazon RDS console to automatically connect a Lambda function to your DB cluster. This simplifies the process of setting up a connection between these resources.

You can also use RDS Proxy to include a proxy in your connection. Lambda functions make frequent short database connections that benefit from the connection pooling that RDS Proxy offers. You can also use any IAM authentication that you've already set up for your Lambda function, instead of managing database credentials in your Lambda application code.

You can connect an existing DB cluster to new and existing Lambda functions using the **Set up Lambda connection** page. The setup process automatically sets up the required security groups for you.

Before setting up a connection between a Lambda function and a DB cluster, make sure that:

- Your Lambda function and DB cluster are in the same VPC.
- You have the right permissions for your user account. For more information about the requirements, see Overview of automatic connectivity with a Lambda function.

If you change security groups after you configure connectivity, the changes might affect the connection between the Lambda function and the DB cluster.

> **Note**
>
> You can automatically set up a connection between a DB cluster and a Lambda function only in the Amazon Web Services Management Console. To connect a Lambda function, all instances in the DB cluster must be in the **Available** state.

To automatically connect a Lambda function and a DB cluster

<result>

After you confirm the setup, Amazon RDS begins the process of connecting your Lambda function, RDS Proxy (if you used a proxy), and DB cluster. The console shows the **Connection details** dialog box, which lists the security group changes that allow connections between your resources.

</result>

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB cluster that you want to connect to a Lambda function.
3. For **Actions**, choose **Set up Lambda connection**.
4. On the **Set up Lambda connection** page, under **Select Lambda function**, do either of the following:
   - If you have an existing Lambda function in the same VPC as your DB cluster, choose **Choose existing function**, and then choose the function.
   - If you don't have a Lambda function in the same VPC, choose **Create new function**, and then enter a **Function name**. The default runtime is set to Nodejs.18. You can modify the settings for your new Lambda function in the Lambda console after you complete the connection setup.
5. (Optional) Under **RDS Proxy**, select **Connect using RDS Proxy**, and then do any of the following:
   - If you have an existing proxy that you want to use, choose **Choose existing proxy**, and then choose the proxy.
   - If you don't have a proxy, and you want Amazon RDS to automatically create one for you, choose **Create new proxy**. Then, for **Database credentials**, do either of the following:

     a. Choose **Database username and password**, and then enter the **Username** and **Password** for your DB cluster.

     b. Choose **Secrets Manager secret**. Then, for **Select secret**, choose an Amazon Secrets Manager secret. If you don't have a Secrets Manager secret, choose **Create new Secrets Manager secret** to create a new secret. After you create the secret, for **Select secret**, choose the new secret.

     After you create the new proxy, choose **Choose existing proxy**, and then choose the proxy. Note that it might take some time for your proxy to be available for connection.
6. (Optional) Expand **Connection summary** and verify the highlighted updates for your resources.
7. Choose **Set up**.

Viewing connected compute resources

You can use the Amazon Web Services Management Console to view the Lambda functions that are connected to your DB cluster. The resources shown include compute resource connections that Amazon RDS set up automatically.

The listed compute resources don't include those that are manually connected to the DB cluster. For example, you can allow a compute resource to access your DB cluster manually by adding a rule to your VPC security group associated with the database.

For the console to list a Lambda function, the following conditions must apply:

- The name of the security group associated with the compute resource matches the pattern `lambda-rds-`*n* or `lambda-rdsproxy-`*n* (where *n* is a number).
- The security group associated with the compute resource has an outbound rule with the port range set to the port of the DB cluster or an associated proxy. The destination for the outbound rule must be set to a security group associated with the DB cluster or an associated proxy.
- If the configuration includes a proxy, the name of the security group attached to the proxy associated with your database matches the pattern `rdsproxy-lambda-`*n* (where *n* is a number).
- The security group associated with the function has an outbound rule with the port set to the port that the DB cluster or associated proxy uses. The destination must be set to a security group associated with the DB cluster or associated proxy.

To view compute resources automatically connected to an DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB cluster.
3. On the **Connectivity & security** tab, view the compute resources under **Connected compute resources**.

Modifying an Amazon Aurora DB cluster

You can change the settings of a DB cluster to accomplish tasks such as changing its backup retention period or its database port. You can also modify DB instances in a DB cluster to accomplish tasks such as changing its DB instance class or enabling Performance Insights for it. This topic guides you through modifying an Aurora DB cluster and its DB instances, and describes the settings for each.

We recommend that you test any changes on a test DB cluster or DB instance before modifying a production DB cluster or DB instance, so that you fully understand the impact of each change. This is especially important when upgrading database versions.

Topics

- Modifying the DB cluster by using the console, CLI, and API
- Modifying a DB instance in a DB cluster
- Changing the password for the database master user
- Settings for Amazon Aurora
- Settings that don't apply to Amazon Aurora DB clusters
- Settings that don't apply to Amazon Aurora DB instances

Modifying the DB cluster by using the console, CLI, and API

You can modify a DB cluster using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

> **Note**
>
> Most modifications can be applied immediately or during the next scheduled maintenance window. Some modifications, such as turning on deletion protection, are applied immediately—regardless of when you choose to apply them.
> Changing the master password in the Amazon Web Services Management Console is always applied immediately.
> If you're using SSL endpoints and change the DB cluster identifier, stop and restart the DB cluster to update the SSL endpoints. For more information, see Stopping and starting an Amazon Aurora DB cluster.

Console

To modify a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then select the DB cluster that you want to modify.
3. Choose **Modify**. The **Modify DB cluster** page appears.
4. Change any of the settings that you want. For information about each setting, see Settings for Amazon Aurora.

   > **Note**
   >
   > In the Amazon Web Services Management Console, some instance level changes only apply to the current DB instance, while others apply to the entire DB cluster. For information about whether a setting applies to the DB instance or the DB cluster, see the scope for the setting in Settings for Amazon Aurora. To change a setting that modifies the entire DB cluster at the instance level in the Amazon Web Services Management Console, follow the instructions in Modifying a DB instance in a DB cluster.

5. When all the changes are as you want them, choose **Continue** and check the summary of modifications.
6. To apply the changes immediately, select **Apply immediately**.
7. On the confirmation page, review your changes. If they are correct, choose **Modify cluster** to save your changes.

   Alternatively, choose **Back** to edit your changes, or choose **Cancel** to cancel your changes.

Amazon CLI

To modify a DB cluster using the Amazon CLI, call the modify-db-cluster command. Specify the DB cluster identifier, and the values for the settings that you want to modify. For information about each setting, see Settings for Amazon Aurora.

> **Note**
>
> Some settings only apply to DB instances. To change those settings, follow the instructions in Modifying a DB instance in a DB cluster.

Example

The following command modifies `mydbcluster` by setting the backup retention period to 1 week (7 days).

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbcluster \
    --backup-retention-period 7
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --backup-retention-period 7
```

RDS API

To modify a DB cluster using the Amazon RDS API, call the ModifyDBCluster operation. Specify the DB cluster identifier, and the values for the settings that you want to modify. For information about each parameter, see Settings for Amazon Aurora.

> **Note**
>
> Some settings only apply to DB instances. To change those settings, follow the instructions in Modifying a DB instance in a DB cluster.

Modifying a DB instance in a DB cluster

You can modify a DB instance in a DB cluster using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

When you modify a DB instance, you can apply the changes immediately. To apply changes immediately, you select the **Apply Immediately** option in the Amazon Web Services Management Console, you use the `--apply-immediately` parameter when calling the Amazon CLI, or you set the `ApplyImmediately` parameter to `true` when using the Amazon RDS API.

If you don't choose to apply changes immediately, the changes are deferred until the next maintenance window. During the next maintenance window, any of these deferred changes are applied. If you choose to apply changes immediately, your new changes and any previously deferred changes are applied.

To see the modifications that are pending for the next maintenance window, use the describe-db-clusters Amazon CLI command and check the `PendingModifiedValues` field.

> **Important**
>
> If any of the deferred modifications require downtime, choosing **Apply immediately** can cause unexpected downtime for the DB instance. There is no downtime for the other DB instances in the DB cluster.
> Modifications that you defer aren't listed in the output of the `describe-pending-maintenance-actions` CLI command. Maintenance actions only include system upgrades that you schedule for the next maintenance window.

Console

To modify a DB instance in a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then select the DB instance that you want to modify.
3. For **Actions**, choose **Modify**. The **Modify DB instance** page appears.
4. Change any of the settings that you want. For information about each setting, see Settings for Amazon Aurora.

> **Note**
>
> Some settings apply to the entire DB cluster and must be changed at the cluster level. To change those settings, follow the instructions in Modifying the DB cluster by using the console, CLI, and API.
> In the Amazon Web Services Management Console, some instance level changes only apply to the current DB instance, while others apply to the entire DB cluster. For information about whether a setting applies to the DB instance or the DB cluster, see the scope for the setting in Settings for Amazon Aurora.

5. When all the changes are as you want them, choose **Continue** and check the summary of modifications.
6. To apply the changes immediately, select **Apply immediately**.
7. On the confirmation page, review your changes. If they are correct, choose **Modify DB instance** to save your changes.

   Alternatively, choose **Back** to edit your changes, or choose **Cancel** to cancel your changes.

Amazon CLI

To modify a DB instance in a DB cluster by using the Amazon CLI, call the modify-db-instance command. Specify the DB instance identifier, and the values for the settings that you want to modify. For information about each parameter, see Settings for Amazon Aurora.

> **Note**
>
> Some settings apply to the entire DB cluster. To change those settings, follow the instructions in Modifying the DB cluster by using the console, CLI, and API.

Example

The following code modifies `mydbinstance` by setting the DB instance class to `db.r4.xlarge`. The changes are applied during the next maintenance window by using `--no-apply-immediately`. Use `--apply-immediately` to apply the changes immediately.

For Linux, macOS, or Unix:

```
aws rds modify-db-instance \
    --db-instance-identifier mydbinstance \
    --db-instance-class db.r4.xlarge \
    --no-apply-immediately
```

For Windows:

```
aws rds modify-db-instance ^
    --db-instance-identifier mydbinstance ^
    --db-instance-class db.r4.xlarge ^
    --no-apply-immediately
```

RDS API

To modify a DB instance by using the Amazon RDS API, call the ModifyDBInstance operation. Specify the DB instance identifier, and the values for the settings that you want to modify. For information about each parameter, see Settings for Amazon Aurora.

> **Note**
>
> Some settings apply to the entire DB cluster. To change those settings, follow the instructions in Modifying the DB cluster by using the console, CLI, and API.

Changing the password for the database master user

You can use the Amazon Web Services Management Console or the Amazon CLI to change the master user password.

Console

You modify the writer DB instance to change the master user password using the Amazon Web Services Management Console.

To change the master user password


1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then select the DB instance that you want to modify.

3. For **Actions**, choose **Modify**.

   The **Modify DB instance** page appears.

4. Enter a **New master password**.

5. For **Confirm master password**, enter the same new password.

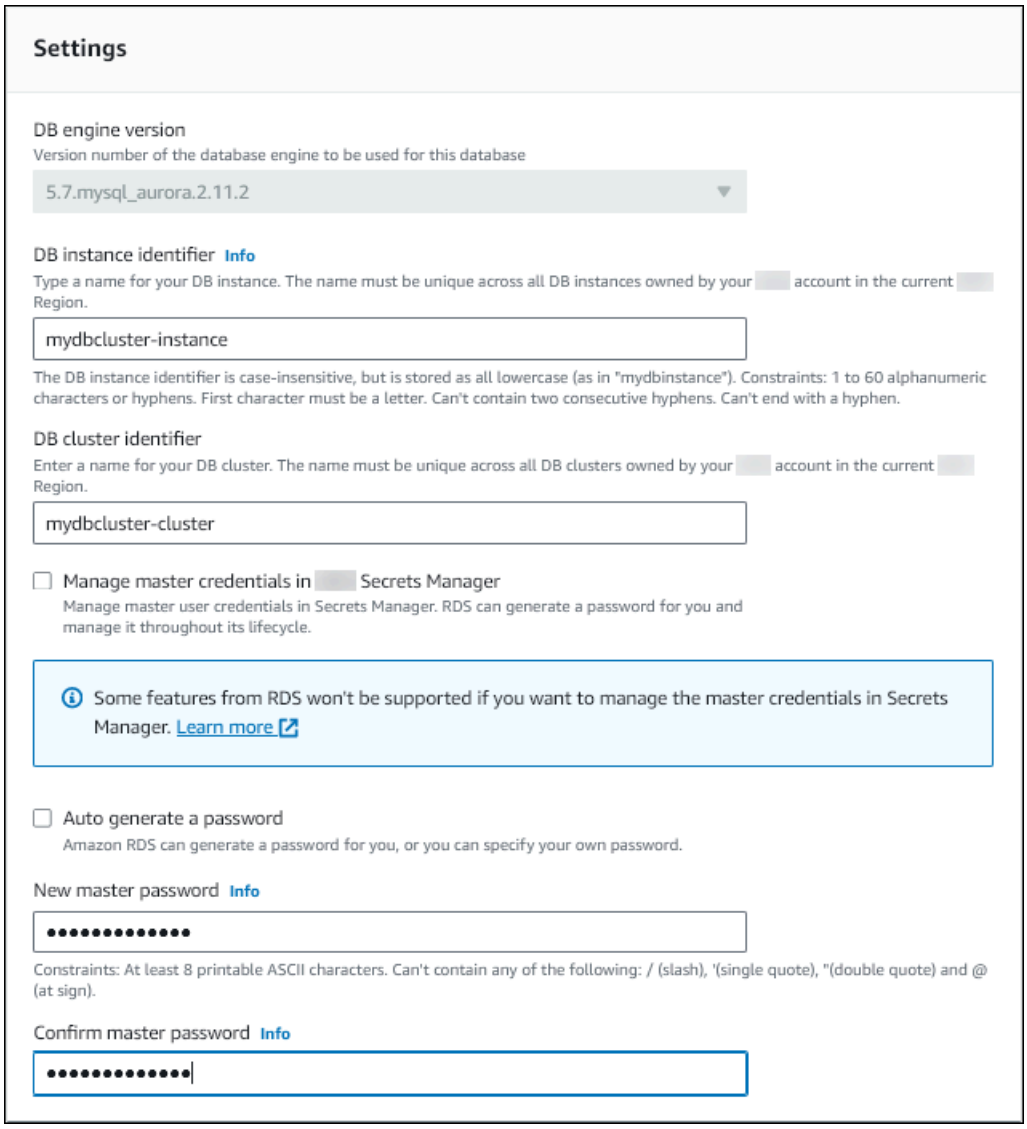

6. Choose **Continue** and check the summary of modifications.

> **Note**
>
> Password changes are always applied immediately.

7. On the confirmation page, choose **Modify DB instance**.

CLI

You call the modify-db-cluster command to change the master user password using the Amazon CLI. Specify the DB cluster identifier and the new password, as shown in the following examples.

You don't need to specify `--apply-immediately|--no-apply-immediately`, because password changes are always applied immediately.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbcluster \
    --master-user-password mynewpassword
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --master-user-password mynewpassword
```

Settings for Amazon Aurora

The following table contains details about which settings you can modify, the methods for modifying the setting, and the scope of the setting. The scope determines whether the setting applies to the entire DB cluster or if it can be set only for specific DB instances.

> **Note**
>
> Additional settings are available if you are modifying an Aurora serverless DB cluster. For information about these settings, see Managing Aurora serverless DB clusters.
> Some settings aren't available for Aurora serverless because of their limitations. For more information, see Requirements and limitations for Aurora serverless.

Setting and description	Method	Scope	Downtime notes
Auto minor version upgrade Whether you want the DB instance to receive preferred minor engine version upgrades automatically when they become available. Upgrades are installed only during your scheduled maintenance window. For more information on about engine updates, see Database engine updates for Amazon Aurora PostgreSQL and Database engine updates for Amazon Aurora MySQL. For more information about the **Auto minor version upgrade** setting for Aurora MySQL, see Enabling automatic upgrades between minor Aurora MySQL versions.	**Note** This setting is enabled by default. For each new cluster, choose the appropriate value for this setting based on its importance, expected lifetime, and the amount of verification testing that you do after each upgrade. When you change this setting, perform this modification for every DB instance in your Aurora cluster. If any DB instance in your cluster has this setting turned off, the cluster isn't automatically upgraded.	The entire DB cluster	An outage doesn't occur during this change. Outages do occur during future maintenance windows when Aurora applies automatic upgrades.

Setting and description	Method	Scope	Downtime notes
	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run modify-db-instance and set the `--auto-minor-version-upgrade|--no-auto-minor-version-upgrade` option. Using the RDS API, call ModifyDBInstance and set the `AutoMinorVersionUpgrade` parameter.		

Setting and description	Method	Scope	Downtime notes
Backup retention period The number of days that automatic backups are retained. The minimum value is 1. For more information, see Backups.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run modify-db-cluster and set the `--backup-retention-period` option. Using the RDS API, call ModifyDBCluster and set the `BackupRetentionPeriod` parameter.	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Backup window (Start time) The time range during which automated backups of your database occurs. The backup window is a start time in Universal Coordinated Time (UTC), and a duration in hours. Aurora backups are continuous and incremental, but the backup window is used to create a daily system backup that is preserved within the backup retention period. You can copy it to preserve it outside of the retention period. The maintenance window and the backup window for the DB cluster can't overlap.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run modify-db-cluster and set the `--preferred-backup-window` option. Using the RDS API, call ModifyDBCluster and set the `Preferred BackupWindow` parameter.	The entire DB cluster.	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
For more information, see Backup window.			
Capacity settings The scaling properties of an Aurora serverless DB cluster. You can only modify scaling properties for DB clusters in `serverless` DB engine mode.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run modify-db-cluster and set the `--scaling-configuration` option. Using the RDS API, call ModifyDBCluster and set the `ScalingConfiguration` parameter.	The entire DB cluster	An outage doesn't occur during this change. The change occurs immediately. This setting ignores the apply immediately setting.

Setting and description	Method	Scope	Downtime notes
Certificate authority The certificate authority (CA) for the server certificate used by the DB instance.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run modify-db-instance and set the `--ca-certificate-identifier` option. Using the RDS API, call ModifyDBInstance and set the `CACertificateIdentifier` parameter.	Only the specified DB instance	An outage only occurs if the DB engine doesn't support rotation without restart. You can use the describe-db-engine-versions Amazon CLI command to determine whether the DB engine supports rotation without restart.

Setting and description	Method	Scope	Downtime notes
Cluster storage configuration The storage type for the DB cluster: **Aurora I/O-Optimized** or **Aurora Standard**. For more information, see Storage configurations for Amazon Aurora DB clusters.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run modify-db-cluster and set the `--storage-type` option. Using the RDS API, call ModifyDBCluster and set the `StorageType` parameter.	The entire DB cluster	Changing the storage type of an Aurora PostgreSQL DB cluster with Optimized Reads instance classes causes an outage. This does not occur when changing storage types for clusters with other instance class types. For more information on the DB instance class types, see DB instance class types.

Setting and description	Method	Scope	Downtime notes
Copy tags to snapshots Select to specify that tags defined for this DB cluster are copied to DB snapshots created from this DB cluster. For more information, see Tagging Amazon Aurora andAmazon RDS resources.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run https://docs.amazonaws.cn/cli/latest/reference/rds/modify-db-cluster.html and set the `--copy-tags-to-snapshot` or `--no-copy-tags-to-snapshot` option. Using the RDS API, call https://docs.amazonaws.cn/AmazonRDS/latest/APIReference/API_ModifyDBCluster.html and set the `CopyTagsToSnapshot` parameter.	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Database authentication The database authentication you want to use. For MySQL: • Choose **Password authentication** to authenticate database users with database passwords only. • Choose **Password and IAM database authentication** to authenticate database users with database passwords and user credentials through IAM users and roles. For more information, see IAM database authentication . For PostgreSQL: • Choose **IAM database authentication**	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run modify-db-cluster and set the following options: • For IAM authentication, set the `--enable-iam-database-authentication|--no-enable-iam-database-authentication` option. • For Kerberos authentication, set the `--domain` and `--domain-iam-role-name` options. Using the RDS API, call ModifyDBCluster	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
to authenticate database users with database passwords and user credentials through users and roles. For more information, see IAM database authentication . • Choose **Kerberos authentication** to authenticate database passwords and user credentials using Kerberos authentication. For more information, see Using Kerberos authentication with Aurora PostgreSQL.	and set the following parameters: • For IAM authentication, set the `EnableIAMDatabaseAuthentication` parameter. • For Kerberos authentication, set the `Domain` and `DomainIAMRoleName` parameters.		

Setting and description	Method	Scope	Downtime notes
Database port The port that you want to use to access the DB cluster.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--port` option. Using the RDS API, call `ModifyDBCluster` and set the `Port` parameter.	The entire DB cluster	An outage occurs during this change. All of the DB instances in the DB cluster are rebooted immediately.

Setting and description	Method	Scope	Downtime notes
DB cluster identifier The DB cluster identifier. This value is stored as a lowercase string. When you change the DB cluster identifier, the DB cluster endpoints change. The endpoints of the DB instances in the DB cluster don't change.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--new-db-cluster-identifier` option. Using the RDS API, call `ModifyDBCluster` and set the `NewDBClusterIdentifier` parameter.	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
DB cluster parameter group The DB cluster parameter group that you want associated with the DB cluster. For more information, see Parameter groups for Amazon Aurora.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--db-cluster-parameter-group-name` option. Using the RDS API, call `ModifyDBCluster` and set the `DBClusterParameterGroupName` parameter.	The entire DB cluster	An outage doesn't occur during this change. When you change the parameter group, changes to some parameters are applied to the DB instances in the DB cluster immediately without a reboot. Changes to other parameters are applied only after the DB instances in the DB cluster are rebooted.

Setting and description	Method	Scope	Downtime notes
DB instance class The DB instance class that you want to use. For more information, see Amazon AuroraDB instance classes.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-instance` and set the `--db-instance-class` option. Using the RDS API, call `ModifyDBInstance` and set the `DBInstanceClass` parameter.	Only the specified DB instance	An outage occurs during this change.

Setting and description	Method	Scope	Downtime notes
DB instance identifier The DB instance identifier. This value is stored as a lowercase string.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-instance` and set the `--new-db-instance-identifier` option. Using the RDS API, call `ModifyDBInstance` and set the `NewDBInstanceIdentifier` parameter.	Only the specified DB instance	Downtime occurs during this change. RDS restarts the DB instance to update the following: • Aurora MySQL – `SERVER_ID` column in the `information_schema.replica_host_status` table • Aurora PostgreSQL – `server_id` column in the `aurora_replica_status()` function

Setting and description	Method	Scope	Downtime notes
DB parameter group The DB parameter group that you want associated with the DB instance. For more information, see Parameter groups for Amazon Aurora.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-instance` and set the `--db-parameter-group-name` option. Using the RDS API, call `ModifyDBInstance` and set the `DBParameterGroupName` parameter.	Only the specified DB instance	An outage doesn't occur during this change. When you associate a new DB parameter group with a DB instance, the modified static and dynamic parameters are applied only after the DB instance is rebooted. However, if you modify dynamic parameters in the DB parameter group after you associate it with the DB instance, these changes are applied immediately without a reboot. For more information, see Parameter groups for Amazon Aurora and Rebooting an Amazon Aurora DB cluster or Amazon Aurora DB instance.

Setting and description	Method	Scope	Downtime notes
Deletion protection **Enable deletion protection** to prevent your DB cluster from being deleted. For more information, see Deletion protection for Aurora clusters.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--deletion-protection|--no-deletion-protection` option. Using the RDS API, call `ModifyDBCluster` and set the `DeletionProtection` parameter.	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Engine version The version of the DB engine that you want to use. Before you upgrade your production DB cluster, we recommend that you test the upgrade process on a test DB cluster to verify its duration and to validate your applications.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--engine-version` option. Using the RDS API, call `ModifyDBCluster` and set the `EngineVersion` parameter.	The entire DB cluster	An outage occurs during this change.

Setting and description	Method	Scope	Downtime notes
Enhanced monitoring **Enable enhanced monitoring** to enable gathering metrics in real time for the operating system that your DB instance runs on. For more information, see Monitoring OS metrics with Enhanced Monitoring.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-instance` and set the `--monitoring-role-arn` and `--monitoring-interval` options. Using the RDS API, call `ModifyDBInstance` and set the `MonitoringRoleArn` and `MonitoringInterval` parameters.	Only the specified DB instance	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Log exports Select the log types to publish to Amazon CloudWatch Logs. For more information, see Aurora MySQL database log files.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--cloudwatch-logs-export-configuration` option. Using the RDS API, call `ModifyDBCluster` and set the `CloudwatchLogsExportConfiguration` parameter.	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Maintenance window The time range during which system maintenance occurs. System maintenance includes upgrades, if applicable. The maintenance window is a start time in Universal Coordinated Time (UTC), and a duration in hours. If you set the window to the current time, there must be at least 30 minutes between the current time and end of the window to ensure any pending changes are applied. You can set the maintenance window independently for the DB cluster and for each DB instance in the DB cluster. When the scope of a modification is the entire DB cluster, the modificat	To change the maintenance window for the DB cluster using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. To change the maintenance window for a DB instance using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. To change the maintenance window for the DB cluster using the Amazon CLI, run `modify-db-cluster` and set the `--preferred-maintenance-window` option. To change the maintenance window for a DB instance	The entire DB cluster or a single DB instance	If there are one or more pending actions that cause an outage, and the maintenance window is changed to include the current time, then those pending actions are applied immediately, and an outage occurs.

Setting and description	Method	Scope	Downtime notes
ion is performed during the DB cluster maintenance window. When the scope of a modification is the a DB instance, the modification is performed during maintenance window of that DB instance. The maintenance window and the backup window for the DB cluster can't overlap. For more informati on, see Amazon RDS maintenance window.	using the Amazon CLI, run `modify-db-instance` and set the `--preferred-maintenance-window` option. To change the maintenance window for the DB cluster using the RDS API, call `ModifyDBCluster` and set the `PreferredMaintenanceWindow` parameter. To change the maintenance window for a DB instance using the RDS API, call `ModifyDBInstance` and set the `PreferredMaintenanceWindow` parameter.		

Setting and description	Method	Scope	Downtime notes
Manage master credentials in Amazon Secrets Manager Select **Manage master credentials in Amazon Secrets Manager** to manage the master user password in a secret in Secrets Manager. Optionally, choose a KMS key to use to protect the secret. Choose from the KMS keys in your account, or enter the key from a different account. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager. If Aurora is already managing the master user password for the DB cluster, you can rotate the master user password by	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-cluster` and set the `--manage-master-user-password | --no-manage-master-user-password` and `--master-user-secret-kms-key-id` options. To rotate the master user password immediately, set the `--rotate-master-user-password` option. Using the RDS API, call `ModifyDBCluster` and set the `ManageMasterUserPassword` and `MasterUserSecretKm`	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
choosing **Rotate secret immediately**. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager.	`sKeyId` parameters. To rotate the master user password immediately, set the `RotateMasterUserPassword` parameter to `true`.		

Setting and description	Method	Scope	Downtime notes
Network type The IP addressing protocols supported by the DB cluster. **IPv4** to specify that resources can communicate with the DB cluster only over the IPv4 addressing protocol. **Dual-stack mode** to specify that resources can communicate with the DB cluster over IPv4, IPv6, or both. Use dual-stack mode if you have any resources that must communicate with your DB cluster over the IPv6 addressing protocol. To use dual-stack mode, make sure at least two subnets spanning two Availability Zones that support both the IPv4 and IPv6 network protocol. Also, make sure you associate an IPv6	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--network-type` option. Using the RDS API, call `ModifyDBCluster` and set the `NetworkType` parameter.	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
CIDR block with subnets in the DB subnet group you specify. For more information, see Amazon Aurora IP addressing.			
New master password The password for your master user. • For Aurora MySQL, the password must contain 8–41 printable ASCII characters. • For Aurora PostgreSQL, it must contain 8–99 printable ASCII characters. • It can't contain /, ", @, or a space.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-cluster` and set the `--master-user-password` option. Using the RDS API, call `ModifyDBCluster` and set the `MasterUserPassword` parameter.	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Performance Insights Whether to enable Performance Insights, a tool that monitors your DB instance load so that you can analyze and troubleshoot your database performance. For more information, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-instance` and set the `--enable-performance-insights|--no-enable-performance-insights` option. Using the RDS API, call `ModifyDBInstance` and set the `EnablePerformanceInsights` parameter.	Only the specified DB instance	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Performance Insights Amazon KMS key The Amazon KMS key identifier for encryption of Performance Insights data. The KMS key identifier is the Amazon Resource Name (ARN), key identifier, or key alias for the KMS key. For more information, see Enabling and disabling detailed per-query and database counter metrics.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-instance` and set the `--performance-insights-kms-key-id` option. Using the RDS API, call `ModifyDBInstance` and set the `PerformanceInsightsKMSKeyId` parameter.	Only the specified DB instance	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Performance Insights retention period The amount of time, in days, to retain Performance Insights data. The retention setting is **Default (7 days)**. To retain your performance data for longer, specify 1–24 months. For more information about retention periods, see Pricing and data retention for Database Insights. For more information, see Enabling and disabling detailed per-query and database counter metrics.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-instance` and set the `--performance-insights-retention-period` option. Using the RDS API, call `ModifyDBInstance` and set the `PerformanceInsightsRetentionPeriod` parameter.	Only the specified DB instance	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Promotion tier A value that specifies the order in which an Aurora Replica is promoted to the primary instance in a DB cluster, after a failure of the existing primary instance. For more information, see Fault tolerance for an Aurora DB cluster.	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-instance` and set the `--promotion-tier` option. Using the RDS API, call `ModifyDBInstance` and set the `PromotionTier` parameter.	Only the specified DB instance	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Public access **Publicly accessible** to give the DB instance a public IP address, meaning that it's accessible outside the VPC. To be publicly accessible, the DB instance also has to be in a public subnet in the VPC. **Not publicly accessible** to make the DB instance accessible only from inside the VPC. For more information, see Hiding a DB cluster in a VPC from the internet. To connect to a DB instance from outside of its Amazon VPC, the DB instance must be publicly accessible, access must be granted using the inbound rules of the DB instance's security group, and other requirements	Using the Amazon Web Services Management Console, Modifying a DB instance in a DB cluster. Using the Amazon CLI, run `modify-db-instance` and set the `--publicly-accessible|--no-publicly-accessible` option. Using the RDS API, call `ModifyDBInstance` and set the `PubliclyAccessible` parameter.	Only the specified DB instance	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
must be met. For more information, see Can't connect to Amazon RDS DB instance. If your DB instance is isn't publicly accessible, you can also use an Amazon Site-to-Site VPN connection or an Amazon Direct Connect connection to access it from a private network. For more information, see Internetwork traffic privacy.			

Setting and description	Method	Scope	Downtime notes
Serverless v2 capacity settings The database capacity of an Aurora serverless DB cluster, measured in Aurora Capacity Units (ACUs). For more information, see Setting the Aurora serverless capacity range for a cluster.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--serverless-v2-scaling-configuration` option. Using the RDS API, call `ModifyDBCluster` and set the `ServerlessV2ScalingConfiguration` parameter.	The entire DB cluster	An outage doesn't occur during this change. The change occurs immediately. This setting ignores the apply immediately setting.

Setting and description	Method	Scope	Downtime notes
Security group The security group you want associated with the DB cluster. For more information, see Controlling access with security groups.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--vpc-security-group-ids` option. Using the RDS API, call `ModifyDBCluster` and set the `VpcSecurityGroupIds` parameter.	The entire DB cluster	An outage doesn't occur during this change.

Setting and description	Method	Scope	Downtime notes
Target Backtrack window The amount of time you want to be able to backtrack your DB cluster, in seconds. This setting is available only for Aurora MySQL and only if the DB cluster was created with Backtrack enabled.	Using the Amazon Web Services Management Console, Modifying the DB cluster by using the console, CLI, and API. Using the Amazon CLI, run `modify-db-cluster` and set the `--backtrack-window` option. Using the RDS API, call `ModifyDBCluster` and set the `BacktrackWindow` parameter.	The entire DB cluster	An outage doesn't occur during this change.

Settings that don't apply to Amazon Aurora DB clusters

The following settings in the Amazon CLI command `modify-db-cluster` and the RDS API operation `ModifyDBCluster` don't apply to Amazon Aurora DB clusters.

> **Note**
>
> You can't use the Amazon Web Services Management Console to modify these settings for Aurora DB clusters.

Amazon CLI setting	RDS API setting
`--allocated-storage`	`AllocatedStorage`
`--auto-minor-version-upgrade | --no-auto-minor-version-upgrade`	`AutoMinorVersionUpgrade`
`--db-cluster-instance-class`	`DBClusterInstanceClass`
`--enable-performance-insights | --no-enable-performance-insights`	`EnablePerformanceInsights`
`--iops`	`Iops`
`--monitoring-interval`	`MonitoringInterval`
`--monitoring-role-arn`	`MonitoringRoleArn`
`--option-group-name`	`OptionGroupName`
`--performance-insights-kms-key-id`	`PerformanceInsightsKMSKeyId`
`--performance-insights-retention-period`	`PerformanceInsightsRetentionPeriod`

Settings that don't apply to Amazon Aurora DB instances

The following settings in the Amazon CLI command `modify-db-instance` and the RDS API operation `ModifyDBInstance` don't apply to Amazon Aurora DB instances.

> **Note**
>
> You can't use the Amazon Web Services Management Console to modify these settings for Aurora DB instances.

Amazon CLI setting	RDS API setting
--allocated-storage	AllocatedStorage
--allow-major-version-upgrade|--no-allow-major-version-upgrade	AllowMajorVersionUpgrade
--copy-tags-to-snapshot|--no-copy-tags-to-snapshot	CopyTagsToSnapshot
--domain	Domain
--db-security-groups	DBSecurityGroups
--db-subnet-group-name	DBSubnetGroupName
--domain-iam-role-name	DomainIAMRoleName
--multi-az|--no-multi-az	MultiAZ
--iops	Iops
--license-model	LicenseModel
--network-type	NetworkType
--option-group-name	OptionGroupName
--processor-features	ProcessorFeatures
--storage-type	StorageType
--tde-credential-arn	TdeCredentialArn
--tde-credential-password	TdeCredentialPassword
--use-default-processor-features|--no-use-default-processor-features	UseDefaultProcessorFeatures

Adding Aurora Replicas to a DB cluster

An Aurora DB cluster with replication has one primary DB instance and up to 15 Aurora Replicas. The primary DB instance supports read and write operations, and performs all data modifications to the cluster volume. Aurora Replicas connect to the same storage volume as the primary DB instance, but support read operations only. You use Aurora Replicas to offload read workloads from the primary DB instance. For more information, see Aurora Replicas.

Amazon Aurora Replicas have the following limitations:

- However, you can add reader instances to Aurora serverless DB clusters. For more information, see Adding an Aurora serverless reader.

We recommend that you distribute the primary instance and Aurora Replicas of your Aurora DB cluster over multiple Availability Zones to improve the availability of your DB cluster. For more information, see Region availability.

To remove an Aurora Replica from an Aurora DB cluster, delete the Aurora Replica by following the instructions in Deleting a DB instance from an Aurora DB cluster.

> **Note**
>
> Amazon Aurora also supports replication with an external database, such as an RDS DB instance. The RDS DB instance must be in the same Amazon Region as Amazon Aurora. For more information, see Replication with Amazon Aurora.

You can add Aurora Replicas to a DB cluster using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To add an Aurora replica to a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then select the DB cluster where you want to add the new DB instance.

3. Make sure that both the cluster and the primary instance are in the **Available** state. If the DB cluster or the primary instance are in a transitional state such as **Creating**, you can't add a replica.

   If the cluster doesn't have a primary instance, create one using the create-db-instance Amazon CLI command. This situation can arise if you used the CLI to restore a DB cluster snapshot and then view the cluster in the Amazon Web Services Management Console.

4. For **Actions**, choose **Add reader**.

   The **Add reader** page appears.

5. On the **Add reader** page, specify options for your Aurora Replica. The following table shows settings for an Aurora Replica.

For this option	Do this
Availability zone	Determine if you want to specify a particular Availability Zone. The list includes only those Availability Zones that are mapped to the DB subnet group that you chose when you created the DB cluster. For more information about Availability Zones, see Regions and Availability Zones.
Publicly accessible	Select `Yes` to give the Aurora Replica a public IP address; otherwise, select `No`. For more information about hiding Aurora Replicas from public access, see Hiding a DB cluster in a VPC from the internet.
Encryption	Select `Enable encryption` to enable encryption at rest for this Aurora Replica. For more information, see Encrypting Amazon Aurora resources.
DB instance class	Select a DB instance class that defines the processing and memory requirements for the Aurora Replica. For more information about DB instance class options, see Amazon AuroraDB instance classes.

For this option	Do this
Aurora replica source	Select the identifier of the primary instance to create an Aurora Replica for.
DB instance identifier	Enter a name for the instance that is unique for your account in the Amazon Region you selected. You might choose to add some intelligence to the name such as including the Amazon Region and DB engine you selected, for example **`aurora-read-instance1`** .
Priority	Choose a failover priority for the instance. If you don't select a value, the default is **tier-1**. This priority determines the order in which Aurora Replicas are promoted when recovering from a primary instance failure. For more information, see Fault tolerance for an Aurora DB cluster.
Database port	The port for an Aurora Replica is the same as the port for the DB cluster.
DB parameter group	Select a parameter group. Aurora has a default parameter group you can use, or you can create your own parameter group. For more information about parameter groups, see Parameter groups for Amazon Aurora.
Performance Insights	The **Turn on Performance Insights** check box is selected by default. The value isn't inherited from the writer instance. For more information, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

For this option	Do this
Enhanced monitoring	Choose **Enable enhanced monitoring** to enable gathering metrics in real time for the operating system that your DB cluster runs on. For more information, see Monitoring OS metrics with Enhanced Monitoring.
Monitoring Role	Only available if **Enhanced Monitoring** is set to **Enable enhanced monitoring**. Choose the IAM role that you created to permit Amazon RDS to communicate with Amazon CloudWatch Logs for you, or choose **Default** to have RDS create a role for you named `rds-monitoring-role` . For more information, see Monitoring OS metrics with Enhanced Monitoring.
Granularity	Only available if **Enhanced Monitoring** is set to **Enable enhanced monitoring**. Set the interval, in seconds, between when metrics are collected for your DB cluster.

For this option	Do this
Auto minor version upgrade	Select **Enable auto minor version upgrade** if you want to enable your Aurora DB cluster to receive minor DB Engine version upgrades automatically when they become available. The **Auto minor version upgrade** setting applies to both Aurora PostgreSQL and Aurora MySQL DB clusters. For Aurora MySQL 2.x clusters, this setting upgrades the clusters to a maximum version of 2.07.2. For more information about engine updates for Aurora PostgreSQL, see Database engine updates for Amazon Aurora PostgreSQL. For more information about engine updates for Aurora MySQL, see Database engine updates for Amazon Aurora MySQL.

6. Choose **Add reader** to create the Aurora Replica.

Amazon CLI

To create an Aurora Replica in your DB cluster, run the create-db-instance Amazon CLI command. Include the name of the DB cluster as the `--db-cluster-identifier` option. You can optionally specify an Availability Zone for the Aurora Replica using the `--availability-zone` parameter, as shown in the following examples.

For example, the following command creates a new MySQL 5.7–compatible Aurora Replica named `sample-instance-us-west-2a`.

For Linux, macOS, or Unix:

```
aws rds create-db-instance --db-instance-identifier sample-instance-us-west-2a \
    --db-cluster-identifier sample-cluster --engine aurora-mysql --db-instance-class
 db.r5.large \
    --availability-zone us-west-2a
```

For Windows:

```
aws rds create-db-instance --db-instance-identifier sample-instance-us-west-2a ^
    --db-cluster-identifier sample-cluster --engine aurora-mysql --db-instance-class
 db.r5.large ^
    --availability-zone us-west-2a
```

The following command creates a new MySQL 5.7–compatible Aurora Replica named `sample-instance-us-west-2a`.

For Linux, macOS, or Unix:

```
aws rds create-db-instance --db-instance-identifier sample-instance-us-west-2a \
    --db-cluster-identifier sample-cluster --engine aurora-mysql --db-instance-class
 db.r5.large \
    --availability-zone us-west-2a
```

For Windows:

```
aws rds create-db-instance --db-instance-identifier sample-instance-us-west-2a ^
    --db-cluster-identifier sample-cluster --engine aurora --db-instance-class
 db.r5.large ^
    --availability-zone us-west-2a
```

The following command creates a new PostgreSQL-compatible Aurora Replica named `sample-instance-us-west-2a`.

For Linux, macOS, or Unix:

```
aws rds create-db-instance --db-instance-identifier sample-instance-us-west-2a \
    --db-cluster-identifier sample-cluster --engine aurora-postgresql --db-instance-
class db.r5.large \
    --availability-zone us-west-2a
```

For Windows:

```
aws rds create-db-instance --db-instance-identifier sample-instance-us-west-2a ^
    --db-cluster-identifier sample-cluster --engine aurora-postgresql --db-instance-
class db.r5.large ^
    --availability-zone us-west-2a
```

RDS API

To create an Aurora Replica in your DB cluster, call the CreateDBInstance operation. Include the name of the DB cluster as the `DBClusterIdentifier` parameter. You can optionally specify an Availability Zone for the Aurora Replica using the `AvailabilityZone` parameter.

For information about Auto Scaling Amazon Aurora with Aurora replicas, see the following sections.

Topics

- Amazon Aurora Auto Scaling with Aurora Replicas
- Adding an auto scaling policy to an Amazon Aurora DB cluster
- Editing an auto scaling policy for an Amazon Aurora DB cluster
- Deleting an auto scaling policy from your Amazon Aurora DB cluster

Amazon Aurora Auto Scaling with Aurora Replicas

To meet your connectivity and workload requirements, Aurora Auto Scaling dynamically adjusts the number of Aurora Replicas (reader DB instances) provisioned for an Aurora DB cluster. Aurora Auto Scaling is available for both Aurora MySQL and Aurora PostgreSQL. Aurora Auto Scaling enables your Aurora DB cluster to handle sudden increases in connectivity or workload. When the connectivity or workload decreases, Aurora Auto Scaling removes unnecessary Aurora Replicas so that you don't pay for unused provisioned DB instances.

You define and apply a scaling policy to an Aurora DB cluster. The *scaling policy* defines the minimum and maximum number of Aurora Replicas that Aurora Auto Scaling can manage. Based on the policy, Aurora Auto Scaling adjusts the number of Aurora Replicas up or down in response to actual workloads, determined by using Amazon CloudWatch metrics and target values.

> **Note**
>
> Aurora Auto Scaling doesn't apply to the workload on the writer DB instance. Aurora Auto Scaling helps with the workload only on the reader instances.

You can use the Amazon Web Services Management Console to apply a scaling policy based on a predefined metric. Alternatively, you can use either the Amazon CLI or Aurora Auto Scaling API to apply a scaling policy based on a predefined or custom metric.

Topics

- Before you begin
- Aurora Auto Scaling policies
- DB instance IDs and tagging
- Aurora Auto Scaling and Performance Insights

Before you begin

Before you can use Aurora Auto Scaling with an Aurora DB cluster, you must first create an Aurora DB cluster with a primary (writer) DB instance. For more information about creating an Aurora DB cluster, see Creating an Amazon Aurora DB cluster.

Aurora Auto Scaling only scales a DB cluster if all cluster instances are in the available state.

When Aurora Auto Scaling adds a new Aurora Replica, the new Aurora Replica is the same DB instance class as the one used by the primary instance. For more information about DB instance classes, see Amazon AuroraDB instance classes. Also, the promotion tier for new Aurora Replicas is set to the last priority, which is 15 by default. This means that during a failover, a replica with a better priority, such as one created manually, would be promoted first. For more information, see Fault tolerance for an Aurora DB cluster.

Aurora Auto Scaling only removes Aurora Replicas that it created.

To benefit from Aurora Auto Scaling, your applications must support connections to new Aurora Replicas. To do so, we recommend using the Aurora reader endpoint. You can use a driver such as the Amazon JDBC Driver. For more information, see Connecting to an Amazon Aurora DB cluster.

> **Note**
>
> Aurora global databases currently don't support Aurora Auto Scaling for secondary DB clusters.

Aurora Auto Scaling policies

Aurora Auto Scaling uses a scaling policy to adjust the number of Aurora Replicas in an Aurora DB cluster. Aurora Auto Scaling has the following components:

- A service-linked role
- A target metric
- Minimum and maximum capacity
- A cooldown period

Topics

- Service linked role
- Target metric
- Minimum and maximum capacity
- Cooldown period
- Enable or disable scale-in activities
- Add, edit, or delete auto scaling policies

Service linked role

Aurora Auto Scaling uses the `AWSServiceRoleForApplicationAutoScaling_RDSCluster` service-linked role. For more information, see Service-linked roles for Application Auto Scaling in the *Application Auto Scaling User Guide*.

Target metric

In this type of policy, a predefined or custom metric and a target value for the metric is specified in a target-tracking scaling policy configuration. Aurora Auto Scaling creates and manages CloudWatch alarms that trigger the scaling policy and calculates the scaling adjustment based on the metric and target value. The scaling policy adds or removes Aurora Replicas as required to keep the metric at, or close to, the specified target value. In addition to keeping the metric close to the target value, a target-tracking scaling policy also adjusts to fluctuations in the metric due to a changing workload. Such a policy also minimizes rapid fluctuations in the number of available Aurora Replicas for your DB cluster.

For example, take a scaling policy that uses the predefined average CPU utilization metric. Such a policy can keep CPU utilization at, or close to, a specified percentage of utilization, such as 40 percent.

> **Note**
>
> For each Aurora DB cluster, you can create only one Auto Scaling policy for each target metric.

When you configure Aurora Auto Scaling, the target metric value is calculated as the average of all reader instances in the cluster. This calculation is performed as follows:

- Includes all reader instances in the Aurora cluster, regardless of whether they're managed by Auto Scaling or added manually.
- Includes instances associated with custom endpoints. Custom endpoints don't influence the calculation of target metrics.
- Does not include the cluster's writer instance.

The metrics are derived from CloudWatch using the following dimensions:

- `DBClusterIdentifier`

- `Role=READER`

For example, consider an Aurora MySQL cluster with the following setup:

- **Manual instances (not controlled by Auto Scaling)**:
  - Writer with 50% CPU utilization
  - Reader 1 (custom endpoint: `custom-reader-1`) with 90% CPU utilization
  - Reader 2 (custom endpoint: `custom-reader-2`) with 90% CPU utilization
- **Auto Scaling instance**:
  - Reader 3 (added using Auto Scaling) with 10% CPU utilization

In this scenario, the target metric for the Auto Scaling policy is calculated as follows:

```
Target metric = (CPU utilization of reader 1 + reader 2 + reader 3) / total number of
 readers

Target metric = (90 + 90 + 10) / 3 = 63.33%
```

The Auto Scaling policy uses this value to evaluate whether to scale in or scale out based on the defined threshold.

Consider the following:

- Although custom endpoints determine how traffic is routed to specific readers, they don't exclude readers from the metric calculation.
- Manual instances are always included in the target metric calculations.
- To avoid unexpected scaling behavior, make sure that the Auto Scaling configuration accounts for all reader instances in the cluster.
- If a cluster has no readers, the metric is not calculated, and the Auto Scaling policy alarms remain inactive. For the Auto Scaling policy to function effectively, at least one reader must be present at all times.

Minimum and maximum capacity

You can specify the maximum number of Aurora Replicas to be managed by Application Auto Scaling. This value must be set to 0–15, and must be equal to or greater than the value specified for the minimum number of Aurora Replicas.

You can also specify the minimum number of Aurora Replicas to be managed by Application Auto Scaling. This value must be set to 0–15, and must be equal to or less than the value specified for the maximum number of Aurora Replicas.

There must be at least one reader DB instance for Aurora Auto Scaling to work. If the DB cluster has no reader instance, and you set the minimum capacity to 0, then Aurora Auto Scaling won't work.

> **Note**
>
> The minimum and maximum capacity are set for an Aurora DB cluster. The specified values apply to all of the policies associated with that Aurora DB cluster.

Cooldown period

You can tune the responsiveness of a target-tracking scaling policy by adding cooldown periods that affect scaling your Aurora DB cluster in and out. A cooldown period blocks subsequent scale-in or scale-out requests until the period expires. These blocks slow the deletions of Aurora Replicas in your Aurora DB cluster for scale-in requests, and the creation of Aurora Replicas for scale-out requests.

You can specify the following cooldown periods:

- A scale-in activity reduces the number of Aurora Replicas in your Aurora DB cluster. A scale-in cooldown period specifies the amount of time, in seconds, after a scale-in activity completes before another scale-in activity can start.
- A scale-out activity increases the number of Aurora Replicas in your Aurora DB cluster. A scale-out cooldown period specifies the amount of time, in seconds, after a scale-out activity completes before another scale-out activity can start.

> **Note**
>
> A scale-out cooldown period is ignored if a subsequent scale-out request is for a larger number of Aurora Replicas than the first request.

If you don't set the scale-in or scale-out cooldown period, the default for each is 300 seconds.

Enable or disable scale-in activities

You can enable or disable scale-in activities for a policy. Enabling scale-in activities allows the scaling policy to delete Aurora Replicas. When scale-in activities are enabled, the scale-in cooldown period in the scaling policy applies to scale-in activities. Disabling scale-in activities prevents the scaling policy from deleting Aurora Replicas.

> **Note**
>
> Scale-out activities are always enabled so that the scaling policy can create Aurora Replicas as needed.

Add, edit, or delete auto scaling policies

You can add, edit, or delete auto scaling policies using the Amazon Web Services Management Console, Amazon CLI, or Application Auto Scaling API. For more information about adding, editing, or deleting auto scaling policies, see the following sections.

- Adding an auto scaling policy to an Amazon Aurora DB cluster
- Editing an auto scaling policy for an Amazon Aurora DB cluster
- Deleting an auto scaling policy from your Amazon Aurora DB cluster

DB instance IDs and tagging

When a replica is added by Aurora Auto Scaling, its DB instance ID is prefixed by `application-autoscaling-`, for example, `application-autoscaling-61aabbcc-4e2f-4c65-b620-ab7421abc123`.

The following tag is automatically added to the DB instance. You can view it on the **Tags** tab of the DB instance detail page.

Tag	Value
application-autoscaling:resourceId	cluster:mynewcluster-cluster

For more information on Amazon RDS resource tags, see Tagging Amazon Aurora andAmazon RDS resources.

Aurora Auto Scaling and Performance Insights

You can use Performance Insights to monitor replicas that have been added by Aurora Auto Scaling, the same as with any Aurora reader DB instance.

For more information on using Performance Insights to monitor Aurora DB clusters, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

Adding an auto scaling policy to an Amazon Aurora DB cluster

You can add a scaling policy using the Amazon Web Services Management Console, the Amazon CLI, or the Application Auto Scaling API.

> **Note**
>
> For an example that adds a scaling policy using Amazon CloudFormation, see Declaring a scaling policy for an Aurora DB cluster in the *Amazon CloudFormation User Guide.*

Console

You can add a scaling policy to an Aurora DB cluster by using the Amazon Web Services Management Console.

To add an auto scaling policy to an Aurora DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

2. In the navigation pane, choose **Databases**.
3. Choose the Aurora DB cluster that you want to add a policy for.
4. Choose the **Logs & events** tab.
5. In the **Auto scaling policies** section, choose **Add**.


   The **Add Auto Scaling policy** dialog box appears.
6. For **Policy Name**, type the policy name.
7. For the target metric, choose one of the following:

   - **Average CPU utilization of Aurora Replicas** to create a policy based on the average CPU utilization.
   - **Average connections of Aurora Replicas** to create a policy based on the average number of connections to Aurora Replicas.
8. For the target value, type one of the following:


   - If you chose **Average CPU utilization of Aurora Replicas** in the previous step, type the percentage of CPU utilization that you want to maintain on Aurora Replicas.
   - If you chose **Average connections of Aurora Replicas** in the previous step, type the number of connections that you want to maintain.

   Aurora Replicas are added or removed to keep the metric close to the specified value.
9. (Optional) Expand **Additional Configuration** to create a scale-in or scale-out cooldown period.
10. For **Minimum capacity**, type the minimum number of Aurora Replicas that the Aurora Auto Scaling policy is required to maintain.
11. For **Maximum capacity**, type the maximum number of Aurora Replicas the Aurora Auto Scaling policy is required to maintain.
12. Choose **Add policy**.

The following dialog box creates an Auto Scaling policy based an average CPU utilization of 40 percent. The policy specifies a minimum of 5 Aurora Replicas and a maximum of 15 Aurora Replicas.

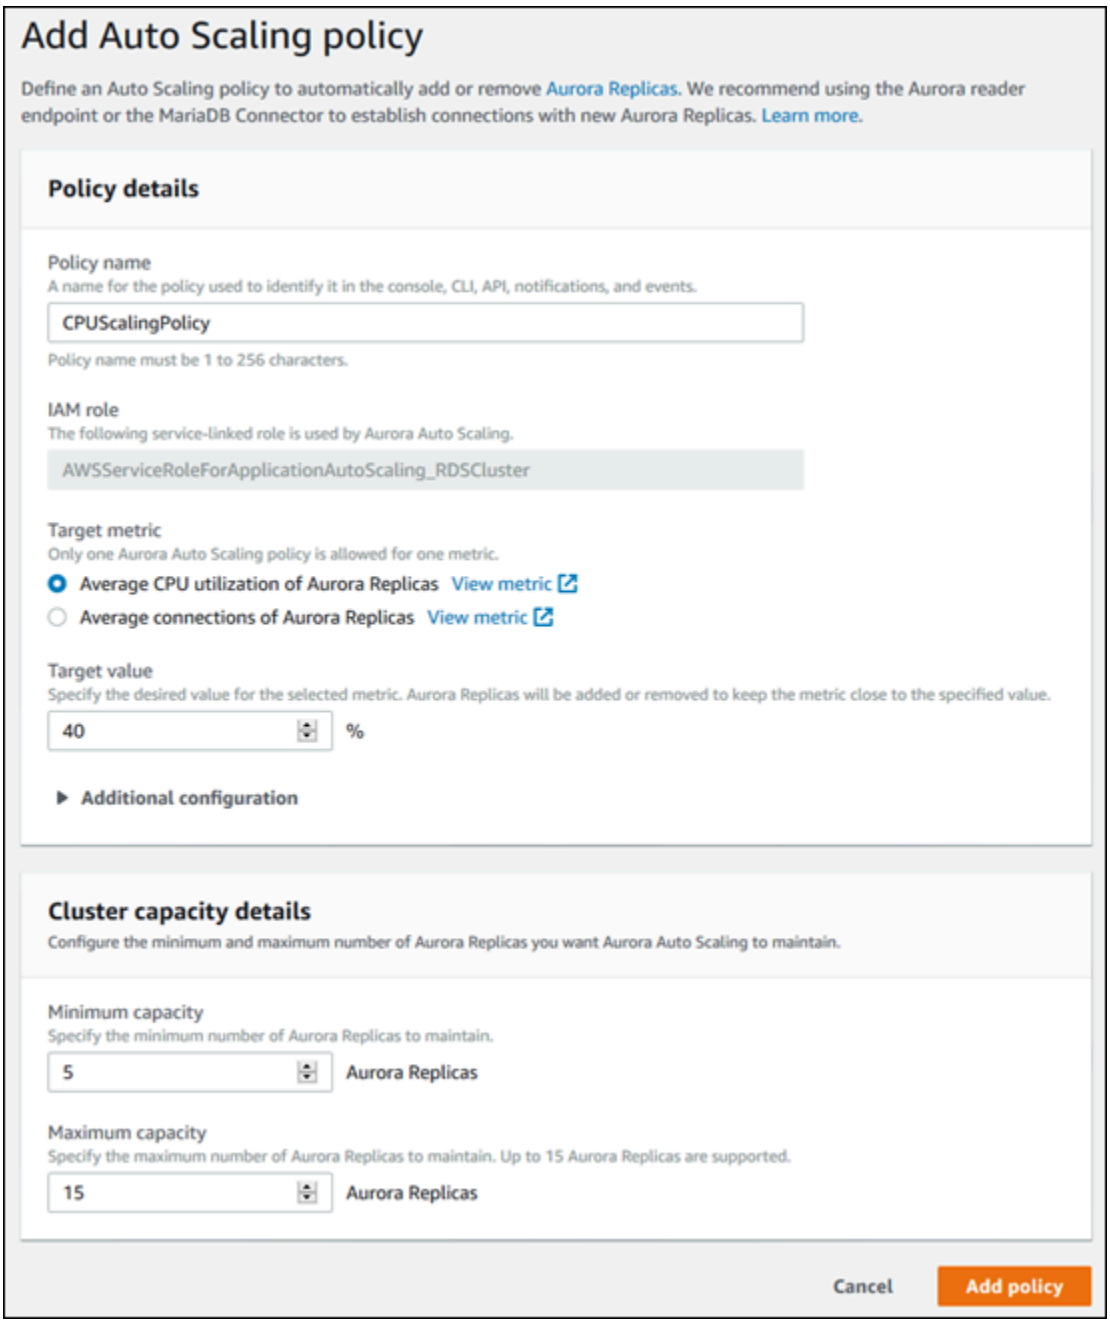

The following dialog box creates an auto scaling policy based an average number of connections of 100. The policy specifies a minimum of two Aurora Replicas and a maximum of eight Aurora Replicas.

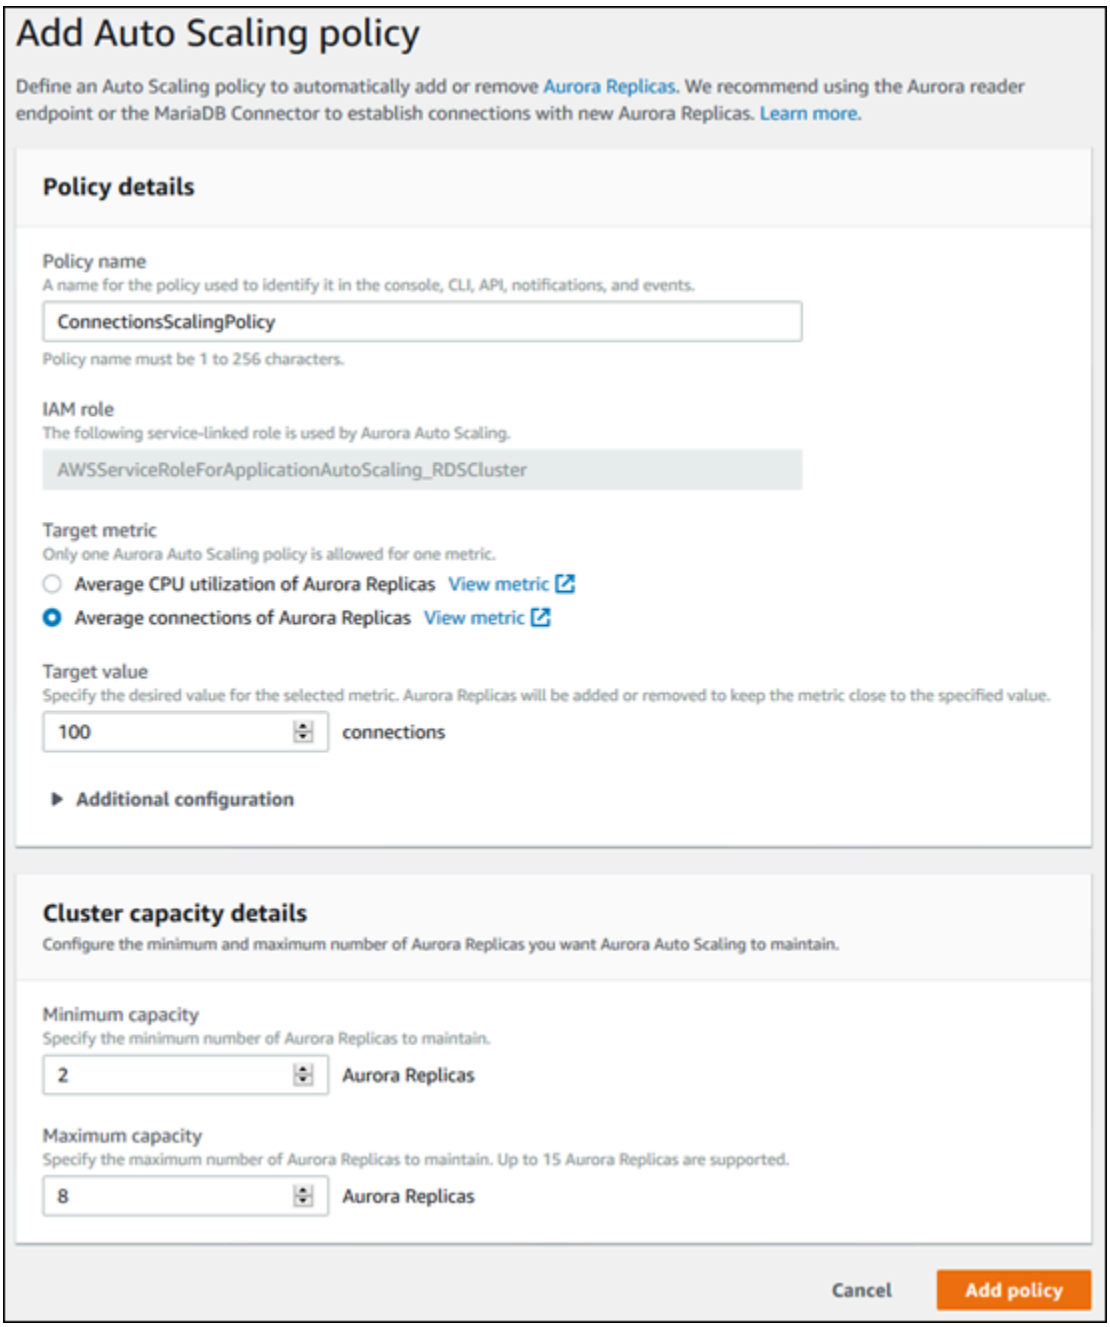

Amazon CLI or Application Auto Scaling API

You can apply a scaling policy based on either a predefined or custom metric. To do so, you can use the Amazon CLI or the Application Auto Scaling API. The first step is to register your Aurora DB cluster with Application Auto Scaling.

Registering an Aurora DB cluster

Before you can use Aurora Auto Scaling with an Aurora DB cluster, you register your Aurora DB cluster with Application Auto Scaling. You do so to define the scaling dimension and limits to be applied to that cluster. Application Auto Scaling dynamically scales the Aurora DB cluster along the `rds:cluster:ReadReplicaCount` scalable dimension, which represents the number of Aurora Replicas.

To register your Aurora DB cluster, you can use either the Amazon CLI or the Application Auto Scaling API.

Amazon CLI

To register your Aurora DB cluster, use the `register-scalable-target` Amazon CLI command with the following parameters:

- `--service-namespace` – Set this value to `rds`.
- `--resource-id` – The resource identifier for the Aurora DB cluster. For this parameter, the resource type is `cluster` and the unique identifier is the name of the Aurora DB cluster, for example `cluster:myscalablecluster`.
- `--scalable-dimension` – Set this value to `rds:cluster:ReadReplicaCount`.
- `--min-capacity` – The minimum number of reader DB instances to be managed by Application Auto Scaling. For information about the relationship between `--min-capacity`, `--max-capacity`, and the number of DB instances in your cluster, see Minimum and maximum capacity.
- `--max-capacity` – The maximum number of reader DB instances to be managed by Application Auto Scaling. For information about the relationship between `--min-capacity`, `--max-capacity`, and the number of DB instances in your cluster, see Minimum and maximum capacity.

Example

In the following example, you register an Aurora DB cluster named `myscalablecluster`. The registration indicates that the DB cluster should be dynamically scaled to have from one to eight Aurora Replicas.

For Linux, macOS, or Unix:

```
aws application-autoscaling register-scalable-target \
    --service-namespace rds \
    --resource-id cluster:myscalablecluster \
```

```
    --scalable-dimension rds:cluster:ReadReplicaCount \
    --min-capacity 1 \
    --max-capacity 8 \
```

For Windows:

```
aws application-autoscaling register-scalable-target ^
    --service-namespace rds ^
    --resource-id cluster:myscalablecluster ^
    --scalable-dimension rds:cluster:ReadReplicaCount ^
    --min-capacity 1 ^
    --max-capacity 8 ^
```

Application Auto Scaling API

To register your Aurora DB cluster with Application Auto Scaling, use the `RegisterScalableTarget` Application Auto Scaling API operation with the following parameters:

- `ServiceNamespace` – Set this value to `rds`.
- `ResourceID` – The resource identifier for the Aurora DB cluster. For this parameter, the resource type is `cluster` and the unique identifier is the name of the Aurora DB cluster, for example `cluster:myscalablecluster`.
- `ScalableDimension` – Set this value to `rds:cluster:ReadReplicaCount`.
- `MinCapacity` – The minimum number of reader DB instances to be managed by Application Auto Scaling. For information about the relationship between `MinCapacity`, `MaxCapacity`, and the number of DB instances in your cluster, see Minimum and maximum capacity.
- `MaxCapacity` – The maximum number of reader DB instances to be managed by Application Auto Scaling. For information about the relationship between `MinCapacity`, `MaxCapacity`, and the number of DB instances in your cluster, see Minimum and maximum capacity.

Example

In the following example, you register an Aurora DB cluster named `myscalablecluster` with the Application Auto Scaling API. This registration indicates that the DB cluster should be dynamically scaled to have from one to eight Aurora Replicas.

```
POST / HTTP/1.1
Host: autoscaling.us-east-2.amazonaws.com
Accept-Encoding: identity
Content-Length: 219
X-Amz-Target: AnyScaleFrontendService.RegisterScalableTarget
X-Amz-Date: 20160506T182145Z
User-Agent: aws-cli/1.10.23 Python/2.7.11 Darwin/15.4.0 botocore/1.4.8
Content-Type: application/x-amz-json-1.1
Authorization: AUTHPARAMS

{
    "ServiceNamespace": "rds",
    "ResourceId": "cluster:myscalablecluster",
    "ScalableDimension": "rds:cluster:ReadReplicaCount",
    "MinCapacity": 1,
    "MaxCapacity": 8
}
```

Defining a scaling policy for an Aurora DB cluster

A target-tracking scaling policy configuration is represented by a JSON block that the metrics and target values are defined in. You can save a scaling policy configuration as a JSON block in a text file. You use that text file when invoking the Amazon CLI or the Application Auto Scaling API. For more information about policy configuration syntax, see `TargetTrackingScalingPolicyConfiguration` in the *Application Auto Scaling API Reference*.

The following options are available for defining a target-tracking scaling policy configuration.

Topics

- Using a predefined metric
- Using a custom metric
- Using cooldown periods
- Disabling scale-in activity

Using a predefined metric

By using predefined metrics, you can quickly define a target-tracking scaling policy for an Aurora DB cluster that works well with both target tracking and dynamic scaling in Aurora Auto Scaling.

Currently, Aurora supports the following predefined metrics in Aurora Auto Scaling:

- **RDSReaderAverageCPUUtilization** – The average value of the `CPUUtilization` metric in CloudWatch across all Aurora Replicas in the Aurora DB cluster.
- **RDSReaderAverageDatabaseConnections** – The average value of the `DatabaseConnections` metric in CloudWatch across all Aurora Replicas in the Aurora DB cluster.

For more information about the `CPUUtilization` and `DatabaseConnections` metrics, see Amazon CloudWatch metrics for Amazon Aurora.

To use a predefined metric in your scaling policy, you create a target tracking configuration for your scaling policy. This configuration must include a `PredefinedMetricSpecification` for the predefined metric and a `TargetValue` for the target value of that metric.

Example

The following example describes a typical policy configuration for target-tracking scaling for an Aurora DB cluster. In this configuration, the `RDSReaderAverageCPUUtilization` predefined metric is used to adjust the Aurora DB cluster based on an average CPU utilization of 40 percent across all Aurora Replicas.

```
{
    "TargetValue": 40.0,
    "PredefinedMetricSpecification":
    {
        "PredefinedMetricType": "RDSReaderAverageCPUUtilization"
    }
}
```

Using a custom metric

By using custom metrics, you can define a target-tracking scaling policy that meets your custom requirements. You can define a custom metric based on any Aurora metric that changes in proportion to scaling.

Not all Aurora metrics work for target tracking. The metric must be a valid utilization metric and describe how busy an instance is. The value of the metric must increase or decrease in proportion to the number of Aurora Replicas in the Aurora DB cluster. This proportional increase or decrease is necessary to use the metric data to proportionally scale out or in the number of Aurora Replicas.

Example

The following example describes a target-tracking configuration for a scaling policy. In this configuration, a custom metric adjusts an Aurora DB cluster based on an average CPU utilization of 50 percent across all Aurora Replicas in an Aurora DB cluster named `my-db-cluster`.

```
{
    "TargetValue": 50,
    "CustomizedMetricSpecification":
    {
        "MetricName": "CPUUtilization",
        "Namespace": "AWS/RDS",
        "Dimensions": [
            {"Name": "DBClusterIdentifier","Value": "my-db-cluster"},
            {"Name": "Role","Value": "READER"}
        ],
        "Statistic": "Average",
        "Unit": "Percent"
    }
}
```

Using cooldown periods

You can specify a value, in seconds, for `ScaleOutCooldown` to add a cooldown period for scaling out your Aurora DB cluster. Similarly, you can add a value, in seconds, for `ScaleInCooldown` to add a cooldown period for scaling in your Aurora DB cluster. For more information about `ScaleInCooldown` and `ScaleOutCooldown`, see `TargetTrackingScalingPolicyConfiguration` in the *Application Auto Scaling API Reference*.

Example

The following example describes a target-tracking configuration for a scaling policy. In this configuration, the `RDSReaderAverageCPUUtilization` predefined metric is used to adjust an Aurora DB cluster based on an average CPU utilization of 40 percent across all Aurora Replicas in that Aurora DB cluster. The configuration provides a scale-in cooldown period of 10 minutes and a scale-out cooldown period of 5 minutes.

```
{
    "TargetValue": 40.0,
    "PredefinedMetricSpecification":
    {
```

```
        "PredefinedMetricType": "RDSReaderAverageCPUUtilization"
    },
    "ScaleInCooldown": 600,
    "ScaleOutCooldown": 300
}
```

Disabling scale-in activity

You can prevent the target-tracking scaling policy configuration from scaling in your Aurora DB cluster by disabling scale-in activity. Disabling scale-in activity prevents the scaling policy from deleting Aurora Replicas, while still allowing the scaling policy to create them as needed.

You can specify a Boolean value for `DisableScaleIn` to enable or disable scale in activity for your Aurora DB cluster. For more information about `DisableScaleIn`, see `TargetTrackingScalingPolicyConfiguration` in the *Application Auto Scaling API Reference*.

Example

The following example describes a target-tracking configuration for a scaling policy. In this configuration, the `RDSReaderAverageCPUUtilization` predefined metric adjusts an Aurora DB cluster based on an average CPU utilization of 40 percent across all Aurora Replicas in that Aurora DB cluster. The configuration disables scale-in activity for the scaling policy.

```
{
    "TargetValue": 40.0,
    "PredefinedMetricSpecification":
    {
        "PredefinedMetricType": "RDSReaderAverageCPUUtilization"
    },
    "DisableScaleIn": true
}
```

Applying a scaling policy to an Aurora DB cluster

After registering your Aurora DB cluster with Application Auto Scaling and defining a scaling policy, you apply the scaling policy to the registered Aurora DB cluster. To apply a scaling policy to an Aurora DB cluster, you can use the Amazon CLI or the Application Auto Scaling API.

Amazon CLI

To apply a scaling policy to your Aurora DB cluster, use the `put-scaling-policy` Amazon CLI command with the following parameters:

- `--policy-name` – The name of the scaling policy.
- `--policy-type` – Set this value to `TargetTrackingScaling`.
- `--resource-id` – The resource identifier for the Aurora DB cluster. For this parameter, the resource type is `cluster` and the unique identifier is the name of the Aurora DB cluster, for example `cluster:myscalablecluster`.
- `--service-namespace` – Set this value to `rds`.
- `--scalable-dimension` – Set this value to `rds:cluster:ReadReplicaCount`.
- `--target-tracking-scaling-policy-configuration` – The target-tracking scaling policy configuration to use for the Aurora DB cluster.

Example

In the following example, you apply a target-tracking scaling policy named `myscalablepolicy` to an Aurora DB cluster named `myscalablecluster` with Application Auto Scaling. To do so, you use a policy configuration saved in a file named `config.json`.

For Linux, macOS, or Unix:

```
aws application-autoscaling put-scaling-policy \
    --policy-name myscalablepolicy \
    --policy-type TargetTrackingScaling \
    --resource-id cluster:myscalablecluster \
    --service-namespace rds \
    --scalable-dimension rds:cluster:ReadReplicaCount \
    --target-tracking-scaling-policy-configuration file://config.json
```

For Windows:

```
aws application-autoscaling put-scaling-policy ^
    --policy-name myscalablepolicy ^
    --policy-type TargetTrackingScaling ^
    --resource-id cluster:myscalablecluster ^
    --service-namespace rds ^
    --scalable-dimension rds:cluster:ReadReplicaCount ^
    --target-tracking-scaling-policy-configuration file://config.json
```

Application Auto Scaling API

To apply a scaling policy to your Aurora DB cluster with the Application Auto Scaling API, use the `PutScalingPolicy` Application Auto Scaling API operation with the following parameters:

- `PolicyName` – The name of the scaling policy.
- `ServiceNamespace` – Set this value to `rds`.
- `ResourceID` – The resource identifier for the Aurora DB cluster. For this parameter, the resource type is `cluster` and the unique identifier is the name of the Aurora DB cluster, for example `cluster:myscalablecluster`.
- `ScalableDimension` – Set this value to `rds:cluster:ReadReplicaCount`.
- `PolicyType` – Set this value to `TargetTrackingScaling`.
- `TargetTrackingScalingPolicyConfiguration` – The target-tracking scaling policy configuration to use for the Aurora DB cluster.

Example

In the following example, you apply a target-tracking scaling policy named `myscalablepolicy` to an Aurora DB cluster named `myscalablecluster` with Application Auto Scaling. You use a policy configuration based on the `RDSReaderAverageCPUUtilization` predefined metric.

```
POST / HTTP/1.1
Host: autoscaling.us-east-2.amazonaws.com
Accept-Encoding: identity
Content-Length: 219
X-Amz-Target: AnyScaleFrontendService.PutScalingPolicy
X-Amz-Date: 20160506T182145Z
User-Agent: aws-cli/1.10.23 Python/2.7.11 Darwin/15.4.0 botocore/1.4.8
Content-Type: application/x-amz-json-1.1
Authorization: AUTHPARAMS

{
    "PolicyName": "myscalablepolicy",
    "ServiceNamespace": "rds",
    "ResourceId": "cluster:myscalablecluster",
    "ScalableDimension": "rds:cluster:ReadReplicaCount",
    "PolicyType": "TargetTrackingScaling",
    "TargetTrackingScalingPolicyConfiguration": {
```

```
        "TargetValue": 40.0,
        "PredefinedMetricSpecification":
        {
            "PredefinedMetricType": "RDSReaderAverageCPUUtilization"
        }
    }
}
```

Editing an auto scaling policy for an Amazon Aurora DB cluster

You can edit a scaling policy using the Amazon Web Services Management Console, the Amazon CLI, or the Application Auto Scaling API.


Console

You can edit a scaling policy by using the Amazon Web Services Management Console.

To edit an auto scaling policy for an Aurora DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the Aurora DB cluster whose auto scaling policy you want to edit.
4. Choose the **Logs & events** tab.
5. In the **Auto scaling policies** section, choose the auto scaling policy, and then choose **Edit**.
6. Make changes to the policy.
7. Choose **Save**.

The following is a sample **Edit Auto Scaling policy** dialog box.

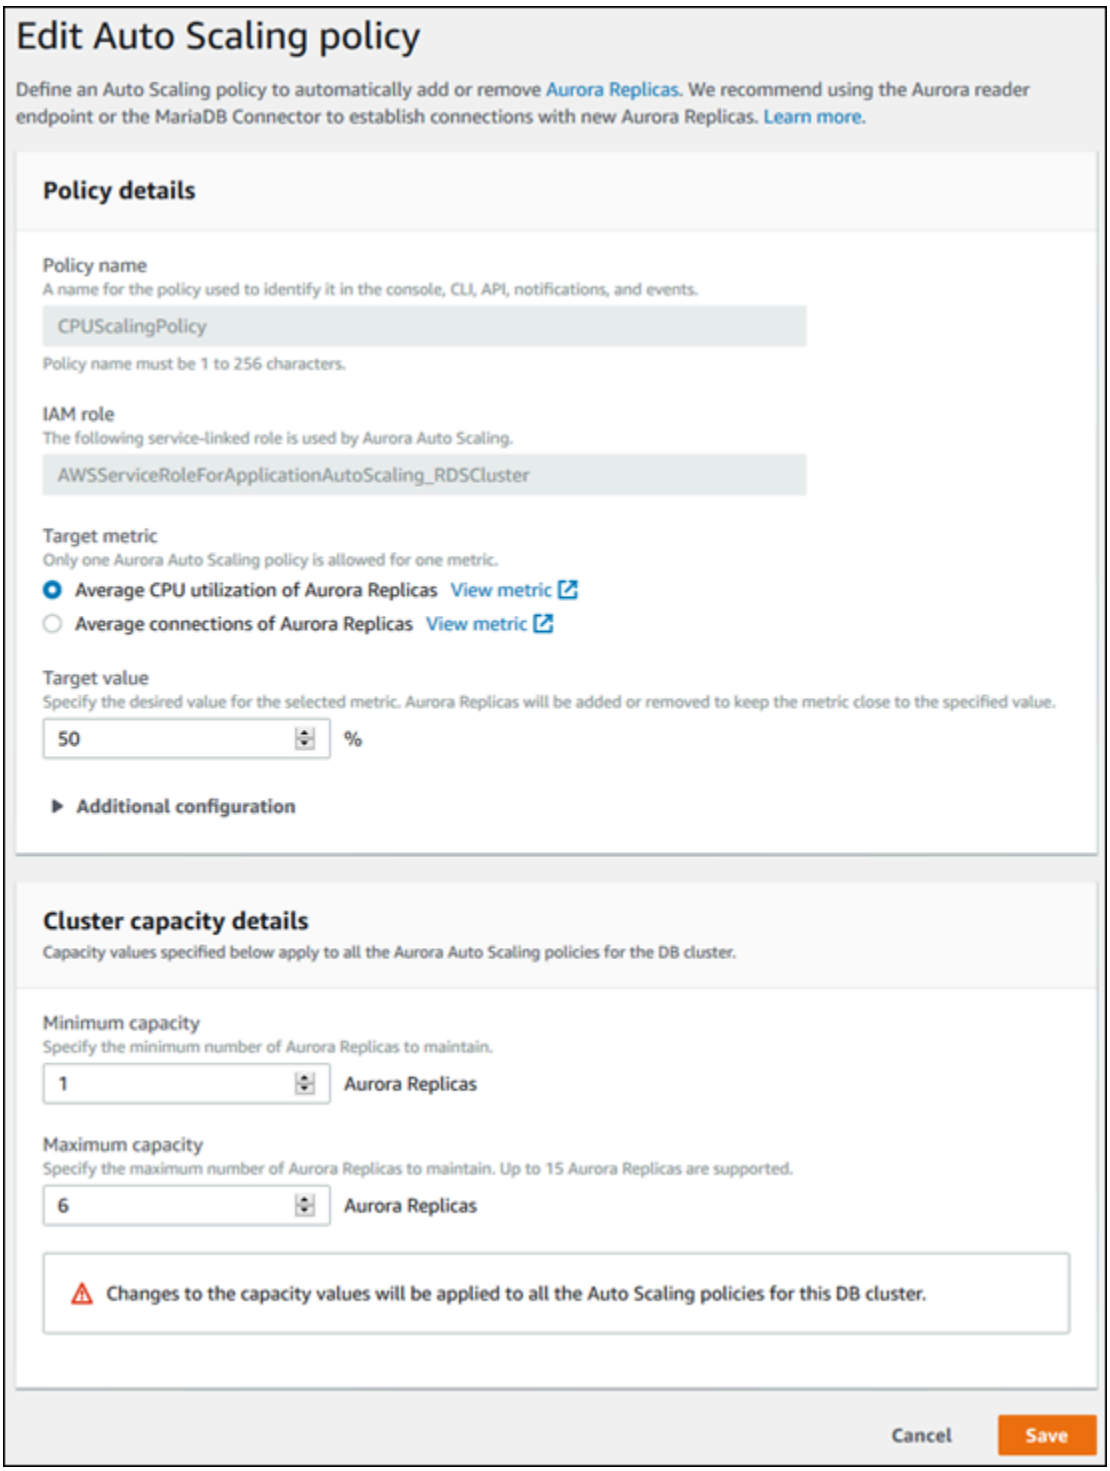

Amazon CLI or Application Auto Scaling API

You can use the Amazon CLI or the Application Auto Scaling API to edit a scaling policy in the same way that you apply a scaling policy:

- When using the Amazon CLI, specify the name of the policy you want to edit in the `--policy-name` parameter. Specify new values for the parameters you want to change.
- When using the Application Auto Scaling API, specify the name of the policy you want to edit in the `PolicyName` parameter. Specify new values for the parameters you want to change.

For more information, see Applying a scaling policy to an Aurora DB cluster.

Deleting an auto scaling policy from your Amazon Aurora DB cluster

You can delete a scaling policy using the Amazon Web Services Management Console, the Amazon CLI, or the Application Auto Scaling API.

Console

You can delete a scaling policy by using the Amazon Web Services Management Console.

To delete an auto scaling policy for an Aurora DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the Aurora DB cluster whose auto scaling policy you want to delete.
4. Choose the **Logs & events** tab.
5. In the **Auto scaling policies** section, choose the auto scaling policy, and then choose **Delete**.

Amazon CLI

To delete a scaling policy from your Aurora DB cluster, use the `delete-scaling-policy` Amazon CLI command with the following parameters:

- `--policy-name` – The name of the scaling policy.
- `--resource-id` – The resource identifier for the Aurora DB cluster. For this parameter, the resource type is `cluster` and the unique identifier is the name of the Aurora DB cluster, for example `cluster:myscalablecluster`.
- `--service-namespace` – Set this value to `rds`.
- `--scalable-dimension` – Set this value to `rds:cluster:ReadReplicaCount`.

Example

In the following example, you delete a target-tracking scaling policy named `myscalablepolicy` from an Aurora DB cluster named `myscalablecluster`.

For Linux, macOS, or Unix:

```
aws application-autoscaling delete-scaling-policy \
    --policy-name myscalablepolicy \
    --resource-id cluster:myscalablecluster \
    --service-namespace rds \
    --scalable-dimension rds:cluster:ReadReplicaCount \
```

For Windows:

```
aws application-autoscaling delete-scaling-policy ^
    --policy-name myscalablepolicy ^
    --resource-id cluster:myscalablecluster ^
    --service-namespace rds ^
    --scalable-dimension rds:cluster:ReadReplicaCount ^
```

Application Auto Scaling API

To delete a scaling policy from your Aurora DB cluster, use the `DeleteScalingPolicy` the Application Auto Scaling API operation with the following parameters:

- `PolicyName` – The name of the scaling policy.
- `ServiceNamespace` – Set this value to `rds`.
- `ResourceID` – The resource identifier for the Aurora DB cluster. For this parameter, the resource type is `cluster` and the unique identifier is the name of the Aurora DB cluster, for example `cluster:myscalablecluster`.
- `ScalableDimension` – Set this value to `rds:cluster:ReadReplicaCount`.

Example

In the following example, you delete a target-tracking scaling policy named `myscalablepolicy` from an Aurora DB cluster named `myscalablecluster` with the Application Auto Scaling API.

```
POST / HTTP/1.1
Host: autoscaling.us-east-2.amazonaws.com
Accept-Encoding: identity
Content-Length: 219
X-Amz-Target: AnyScaleFrontendService.DeleteScalingPolicy
X-Amz-Date: 20160506T182145Z
User-Agent: aws-cli/1.10.23 Python/2.7.11 Darwin/15.4.0 botocore/1.4.8
Content-Type: application/x-amz-json-1.1
Authorization: AUTHPARAMS

{
    "PolicyName": "myscalablepolicy",
    "ServiceNamespace": "rds",
    "ResourceId": "cluster:myscalablecluster",
    "ScalableDimension": "rds:cluster:ReadReplicaCount"
}
```

Managing performance and scaling for Aurora DB clusters

You can use the following options to manage performance and scaling for Aurora DB clusters and DB instances:

Topics

- Storage scaling
- Instance scaling
- Read scaling
- Managing connections
- Managing query execution plans

Storage scaling

Aurora storage automatically scales with the data in your cluster volume. As your data grows, your cluster volume storage expands depending on the DB engine version. For information about maximum Aurora cluster volume sizes for each engine version, see Amazon Aurora size limits. To learn what kinds of data are included in the cluster volume, see Amazon Aurora storage. For details about the maximum size for a specific version, see Amazon Aurora size limits.

The size of your cluster volume is evaluated on an hourly basis to determine your storage costs. For pricing information, see the Aurora pricing page.

Even though an Aurora cluster volume can scale up in size to many tebibytes, you are only charged for the space that you use in the volume. The mechanism for determining billed storage space depends on the version of your Aurora cluster.

- When Aurora data is removed from the cluster volume, the overall billed space decreases by a comparable amount. This dynamic resizing behavior happens when underlying tablespaces are dropped or reorganized to require less space. Thus, you can reduce storage charges by dropping tables and databases that you no longer need. Dynamic resizing applies to certain Aurora versions. The following are the Aurora versions where the cluster volume dynamically resizes as you remove data:

Database engine	Versions with dynamic resizing
Aurora MySQL	• Version 3 (compatible with MySQL 8.0): all supported versions • Version 2 (compatible with MySQL 5.7): 2.11 and higher
Aurora PostgreSQL	All supported versions
Aurora serverless	All supported versions

- In Aurora versions lower than those in the preceding list, the cluster volume can reuse space that's freed up when you remove data, but the volume itself never decreases in size.

Dynamic resizing applies to operations that physically remove or resize tablespaces within the cluster volume. Thus, it applies to SQL statements such as `DROP TABLE`, `DROP DATABASE`, `TRUNCATE TABLE`, and `ALTER TABLE ... DROP PARTITION`. It doesn't apply to deleting rows using the `DELETE` statement. If you delete a large number of rows from a table, you can run the Aurora MySQL `OPTIMIZE TABLE` statement or use the Aurora PostgreSQL `pg_repack` extension afterward to reorganize the table and dynamically resize the cluster volume.

For Aurora MySQL, the following considerations apply:

- After you upgrade your DB cluster to a DB engine version that supports dynamic resizing, and when the feature is enabled in that specific Amazon Web Services Region, any space that's later freed by certain SQL statements, such as `DROP TABLE`, is reclaimable.

  If the feature is explicitly disabled in a particular Amazon Web Services Region, the space might only be reusable—and not reclaimable—even on versions that support dynamic resizing.

  The feature was enabled for specific DB engine versions (1.23.0–1.23.4, 2.09.0–2.09.3, and 2.10.0) between November 2020 and March 2022, and is enabled by default on any subsequent versions.
- A table is stored internally in one or more contiguous fragments of varying sizes. While running `TRUNCATE TABLE` operations, the space corresponding to the first fragment is reusable and not reclaimable. Other fragments are reclaimable. During `DROP TABLE` operations, space corresponding to the entire tablespace is reclaimable.

- The `innodb_file_per_table` parameter affects how table storage is organized. When tables are part of the system tablespace, dropping the table doesn't reduce the size of the system tablespace. Thus, make sure to set `innodb_file_per_table` to 1 for Aurora MySQL DB clusters to take full advantage of dynamic resizing.
- In version 2.11 and higher, the InnoDB temporary tablespace is dropped and re-created on restart. This releases the space occupied by the temporary tablespace to the system, and then the cluster volume resizes. To take full advantage of the dynamic resizing feature, we recommend that you upgrade your DB cluster to version 2.11 or higher.

> **Note**
>
> The dynamic resizing feature doesn't reclaim space immediately when tables in tablespaces are dropped, but gradually at a rate of approximately 10 TB per day. Space in the system tablespace isn't reclaimed, because the system tablespace is never removed. Unreclaimed free space in a tablespace is reused when an operation needs space in that tablespace. The dynamic resizing feature can reclaim storage space only when the cluster is in an available state.

You can check how much storage space a cluster is using by monitoring the `VolumeBytesUsed` metric in CloudWatch. For more information on storage billing, see How Aurora data storage is billed.

- In the Amazon Web Services Management Console, you can see this figure in a chart by viewing the `Monitoring` tab on the details page for the cluster.
- With the Amazon CLI, you can run a command similar to the following Linux example. Substitute your own values for the start and end times and the name of the cluster.

```
aws cloudwatch get-metric-statistics --metric-name "VolumeBytesUsed" \
  --start-time "$(date -d '6 hours ago')" --end-time "$(date -d 'now')" --period 60 \
  --namespace "AWS/RDS" \
  --statistics Average Maximum Minimum \
  --dimensions Name=DBClusterIdentifier,Value=my_cluster_identifier
```

That command produces output similar to the following.

```
{
```

```
    "Label": "VolumeBytesUsed",
    "Datapoints": [
        {
            "Timestamp": "2020-08-04T21:25:00+00:00",
            "Average": 182871982080.0,
            "Minimum": 182871982080.0,
            "Maximum": 182871982080.0,
            "Unit": "Bytes"
        }
    ]
}
```

The following examples show how you might track storage usage for an Aurora cluster over time using Amazon CLI commands on a Linux system. The `--start-time` and `--end-time` parameters define the overall time interval as one day. The `--period` parameter requests the measurements at one hour intervals. It doesn't make sense to choose a `--period` value that's small, because the metrics are collected at intervals, not continuously. Also, Aurora storage operations sometimes continue for some time in the background after the relevant SQL statement finishes.

The first example returns output in the default JSON format. The data points are returned in arbitrary order, not sorted by timestamp. You might import this JSON data into a charting tool to do sorting and visualization.

```
$ aws cloudwatch get-metric-statistics --metric-name "VolumeBytesUsed" \
  --start-time "$(date -d '1 day ago')" --end-time "$(date -d 'now')" --period 3600
  --namespace "AWS/RDS" --statistics Maximum --dimensions
 Name=DBClusterIdentifier,Value=my_cluster_id
{
    "Label": "VolumeBytesUsed",
    "Datapoints": [
        {
            "Timestamp": "2020-08-04T19:40:00+00:00",
            "Maximum": 182872522752.0,
            "Unit": "Bytes"
        },
        {
            "Timestamp": "2020-08-05T00:40:00+00:00",
            "Maximum": 198573719552.0,
            "Unit": "Bytes"
        },
        {
```

```
            "Timestamp": "2020-08-05T05:40:00+00:00",
            "Maximum": 206827454464.0,
            "Unit": "Bytes"
        },
        {
            "Timestamp": "2020-08-04T17:40:00+00:00",
            "Maximum": 182872522752.0,
            "Unit": "Bytes"
        },
... output omitted ...
```

This example returns the same data as the previous one. The `--output` parameter represents the data in compact plain text format. The `aws cloudwatch` command pipes its output to the `sort` command. The `-k` parameter of the `sort` command sorts the output by the third field, which is the timestamp in Universal Coordinated Time (UTC) format.

```
$ aws cloudwatch get-metric-statistics --metric-name "VolumeBytesUsed" \
  --start-time "$(date -d '1 day ago')" --end-time "$(date -d 'now')" --period 3600 \
  --namespace "AWS/RDS" --statistics Maximum --dimensions
 Name=DBClusterIdentifier,Value=my_cluster_id \
  --output text | sort -k 3
VolumeBytesUsed
DATAPOINTS  182872522752.0  2020-08-04T17:41:00+00:00 Bytes
DATAPOINTS  182872522752.0  2020-08-04T18:41:00+00:00 Bytes
DATAPOINTS  182872522752.0  2020-08-04T19:41:00+00:00 Bytes
DATAPOINTS  182872522752.0  2020-08-04T20:41:00+00:00 Bytes
DATAPOINTS  187667791872.0  2020-08-04T21:41:00+00:00 Bytes
DATAPOINTS  190981029888.0  2020-08-04T22:41:00+00:00 Bytes
DATAPOINTS  195587244032.0  2020-08-04T23:41:00+00:00 Bytes
DATAPOINTS  201048915968.0  2020-08-05T00:41:00+00:00 Bytes
DATAPOINTS  205368492032.0  2020-08-05T01:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T02:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T03:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T04:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T05:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T06:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T07:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T08:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T09:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T10:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T11:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T12:41:00+00:00 Bytes
DATAPOINTS  206827454464.0  2020-08-05T13:41:00+00:00 Bytes
```

```
DATAPOINTS  206827454464.0  2020-08-05T14:41:00+00:00 Bytes
DATAPOINTS  206833664000.0  2020-08-05T15:41:00+00:00 Bytes
DATAPOINTS  206833664000.0  2020-08-05T16:41:00+00:00 Bytes
```

The sorted output shows how much storage was used at the start and end of the monitoring period. You can also find the points during that period when Aurora allocated more storage for the cluster. The following example uses Linux commands to reformat the starting and ending `VolumeBytesUsed` values as gigabytes (GB) and as gibibytes (GiB). Gigabytes represent units measured in powers of 10 and are commonly used in discussions of storage for rotational hard drives. Gibibytes represent units measured in powers of 2. Aurora storage measurements and limits are typically stated in the power-of-2 units, such as gibibytes and tebibytes.

```
$ GiB=$((1024*1024*1024))
$ GB=$((1000*1000*1000))
$ echo "Start: $((182872522752/$GiB)) GiB, End: $((206833664000/$GiB)) GiB"
Start: 170 GiB, End: 192 GiB
$ echo "Start: $((182872522752/$GB)) GB, End: $((206833664000/$GB)) GB"
Start: 182 GB, End: 206 GB
```

The `VolumeBytesUsed` metric tells you how much storage in the cluster is incurring charges. Thus, it's best to minimize this number when practical. However, this metric doesn't include some storage that Aurora uses internally in the cluster and doesn't charge for. If your cluster is approaching the storage limit and might run out of space, it's more helpful to monitor the `AuroraVolumeBytesLeftTotal` metric and try to maximize that number. The following example runs a similar calculation as the previous one, but for `AuroraVolumeBytesLeftTotal` instead of `VolumeBytesUsed`.

```
$ aws cloudwatch get-metric-statistics --metric-name "AuroraVolumeBytesLeftTotal" \
  --start-time "$(date -d '1 hour ago')" --end-time "$(date -d 'now')" --period 3600 \
  --namespace "AWS/RDS" --statistics Maximum --dimensions
 Name=DBClusterIdentifier,Value=my_old_cluster_id \
  --output text | sort -k 3
AuroraVolumeBytesLeftTotal
DATAPOINTS      140530528288768.0       2023-02-23T19:25:00+00:00       Count
$ TiB=$((1024*1024*1024*1024))
$ TB=$((1000*1000*1000*1000))
$ echo "$((69797067915264 / $TB)) TB remaining for this cluster"
69 TB remaining for this cluster
$ echo "$((69797067915264 / $TiB)) TiB remaining for this cluster"
63 TiB remaining for this cluster
```

For a cluster running Aurora MySQL version 2.09 or higher, or Aurora PostgreSQL, the free size reported by `VolumeBytesUsed` increases when data is added and decreases when data is removed. The following example shows how. This report shows the maximum and minimum storage size for a cluster at 15-minute intervals as tables with temporary data are created and dropped. The report lists the maximum value before the minimum value. Thus, to understand how storage usage changed within the 15-minute interval, interpret the numbers from right to left.

```
$ aws cloudwatch get-metric-statistics --metric-name "VolumeBytesUsed" \
  --start-time "$(date -d '4 hours ago')" --end-time "$(date -d 'now')" --period 1800 \
  --namespace "AWS/RDS" --statistics Maximum Minimum --dimensions
 Name=DBClusterIdentifier,Value=my_new_cluster_id
  --output text | sort -k 4
VolumeBytesUsed
DATAPOINTS 14545305600.0 14545305600.0 2020-08-05T20:49:00+00:00 Bytes
DATAPOINTS 14545305600.0 14545305600.0 2020-08-05T21:19:00+00:00 Bytes
DATAPOINTS 22022176768.0 14545305600.0 2020-08-05T21:49:00+00:00 Bytes
DATAPOINTS 22022176768.0 22022176768.0 2020-08-05T22:19:00+00:00 Bytes
DATAPOINTS 22022176768.0 22022176768.0 2020-08-05T22:49:00+00:00 Bytes
DATAPOINTS 22022176768.0 15614263296.0 2020-08-05T23:19:00+00:00 Bytes
DATAPOINTS 15614263296.0 15614263296.0 2020-08-05T23:49:00+00:00 Bytes
DATAPOINTS 15614263296.0 15614263296.0 2020-08-06T00:19:00+00:00 Bytes
```

The following example shows how for clusters running compatible versions of Aurora MySQL or Aurora PostgreSQL, the free size reported by `AuroraVolumeBytesLeftTotal` reflects the 256-TiB size limit. For more information about compatible versions, see Amazon Aurora size limits.

```
$ aws cloudwatch get-metric-statistics --region us-east-1 --metric-name
 "AuroraVolumeBytesLeftTotal" \
  --start-time "$(date -d '4 hours ago')" --end-time "$(date -d 'now')" --period 1800 \
  --namespace "AWS/RDS" --statistics Minimum --dimensions
 Name=DBClusterIdentifier,Value=pq-57 \
  --output text | sort -k 3
AuroraVolumeBytesLeftTotal
DATAPOINTS 140515818864640.0 2020-08-05T20:56:00+00:00 Count
DATAPOINTS 140515818864640.0 2020-08-05T21:26:00+00:00 Count
DATAPOINTS 140515818864640.0 2020-08-05T21:56:00+00:00 Count
DATAPOINTS 140514866757632.0 2020-08-05T22:26:00+00:00 Count
DATAPOINTS 140511020580864.0 2020-08-05T22:56:00+00:00 Count
DATAPOINTS 140503168843776.0 2020-08-05T23:26:00+00:00 Count
DATAPOINTS 140503168843776.0 2020-08-05T23:56:00+00:00 Count
DATAPOINTS 140515818864640.0 2020-08-06T00:26:00+00:00 Count
$ TiB=$((1024*1024*1024*1024))
```

```
$ TB=$((1000*1000*1000*1000))
$ echo "$((140515818864640 / $TB)) TB remaining for this cluster"
140 TB remaining for this cluster
$ echo "$((140515818864640 / $TiB)) TiB remaining for this cluster"
256 TiB remaining for this cluster
```

Instance scaling

You can scale your Aurora DB cluster as needed by modifying the DB instance class for each DB instance in the DB cluster. Aurora supports several DB instance classes optimized for Aurora, depending on database engine compatibility.

Database engine	Instance scaling
Amazon Aurora MySQL	See Scaling Aurora MySQL DB instances
Amazon Aurora PostgreSQL	See Scaling Aurora PostgreSQL DB instances

Read scaling

You can achieve read scaling for your Aurora DB cluster by creating up to 15 Aurora Replicas in a DB cluster. Each Aurora Replica returns the same data from the cluster volume with minimal replica lag—usually considerably less than 100 milliseconds after the primary instance has written an update. As your read traffic increases, you can create additional Aurora Replicas and connect to them directly to distribute the read load for your DB cluster. Aurora Replicas don't have to be of the same DB instance class as the primary instance.

For information about adding Aurora Replicas to a DB cluster, see Adding Aurora Replicas to a DB cluster.

Managing connections

The maximum number of connections allowed to an Aurora DB instance is determined by the `max_connections` parameter in the instance-level parameter group for the DB instance. The default value of that parameter varies depends on the DB instance class used for the DB instance and database engine compatibility.

Database engine	max_connections default value
Amazon Aurora MySQL	See Maximum connections to an Aurora MySQL DB instance
Amazon Aurora PostgreSQL	See Maximum connections to an Aurora PostgreSQL DB instance

Tip

If your applications frequently open and close connections, or keep a large number of long-lived connections open, we recommend that you use Amazon RDS Proxy. RDS Proxy is a fully managed, highly available database proxy that uses connection pooling to share database connections securely and efficiently. To learn more about RDS Proxy, see Amazon RDS Proxy for Aurora.

Managing query execution plans

If you use query plan management for Aurora PostgreSQL, you gain control over which plans the optimizer runs. For more information, see Managing query execution plans for Aurora PostgreSQL.

Cloning a volume for an Amazon Aurora DB cluster

By using Aurora cloning, you can create a new cluster that initially shares the same data pages as the original, but is a separate and independent volume. The process is designed to be fast and cost-effective. The new cluster with its associated data volume is known as a *clone*. Creating a clone is faster and more space-efficient than physically copying the data using other techniques, such as restoring a snapshot.

For information about cloning a volume across VPCs, see Cross-VPC cloning with Amazon Aurora.

Topics

- Overview of Aurora cloning
- Limitations of Aurora cloning
- How Aurora cloning works
- Creating an Amazon Aurora clone
- Cross-VPC cloning with Amazon Aurora
- Cross-account cloning with Amazon RAM and Amazon Aurora

Overview of Aurora cloning

Aurora uses a *copy-on-write protocol* to create a clone. This mechanism uses minimal additional space to create an initial clone. When the clone is first created, Aurora keeps a single copy of the data that is used by the source Aurora DB cluster and the new (cloned) Aurora DB cluster. Additional storage is allocated only when changes are made to data (on the Aurora storage volume) by the source Aurora DB cluster or the Aurora DB cluster clone. To learn more about the copy-on-write protocol, see How Aurora cloning works.

Aurora cloning is especially useful for quickly setting up test environments using your production data, without risking data corruption. You can use clones for many types of applications, such as the following:

- Experiment with potential changes (schema changes and parameter group changes, for example) to assess all impacts.
- Run workload-intensive operations, such as exporting data or running analytical queries on the clone.

- Create a copy of your production DB cluster for development, testing, or other purposes.

You can create more than one clone from the same Aurora DB cluster. You can also create multiple clones from another clone.

After creating an Aurora clone, you can configure the Aurora DB instances differently from the source Aurora DB cluster. For example, you might not need a clone for development purposes to meet the same high availability requirements as the source production Aurora DB cluster. In this case, you can configure the clone with a single Aurora DB instance rather than the multiple DB instances used by the Aurora DB cluster.

When you create a clone using a different deployment configuration from the source, the clone is created using the latest minor version of the source's Aurora DB engine.

When you create clones from your Aurora DB clusters, the clones are created in your Amazon account—the same account that owns the source Aurora DB cluster. However, you can also share Aurora serverless and provisioned Aurora DB clusters and clones with other Amazon accounts. For more information, see Cross-account cloning with Amazon RAM and Amazon Aurora.

When you finish using the clone for your testing, development, or other purposes, you can delete it.

Limitations of Aurora cloning

Aurora cloning currently has the following limitations:

- You can create as many clones as you want, up to the maximum number of DB clusters allowed in the Amazon Web Services Region.
- You can create up to 15 clones with copy-on-write protocol. After you have 15 clones, the next clone that you create is a full copy. The full-copy protocol acts like a point-in-time recovery.
- You can't create a clone in a different Amazon Region from the source Aurora DB cluster.
- You can't create a clone from an Aurora DB cluster without the parallel query feature to a cluster that uses parallel query. To bring data into a cluster that uses parallel query, create a snapshot of the original cluster and restore it to the cluster that's using the parallel query feature.
- You can't create a clone from an Aurora DB cluster that has no DB instances. You can only clone Aurora DB clusters that have at least one DB instance.
- You can create a clone in a different virtual private cloud (VPC) than that of the Aurora DB cluster. If you do, the subnets of the VPCs must map to the same Availability Zones.

- You can create an Aurora provisioned clone from a provisioned Aurora DB cluster.
- Clusters with Aurora serverless instances follow the same rules as provisioned clusters.

How Aurora cloning works

Aurora cloning works at the storage layer of an Aurora DB cluster. It uses a *copy-on-write* protocol that's both fast and space-efficient in terms of the underlying durable media supporting the Aurora storage volume. You can learn more about Aurora cluster volumes in the Overview of Amazon Aurora storage.


Topics

- Understanding the copy-on-write protocol
- Deleting a source cluster volume

Understanding the copy-on-write protocol


An Aurora DB cluster stores data in pages in the underlying Aurora storage volume.

For example, in the following diagram you can find an Aurora DB cluster (A) that has four data pages, 1, 2, 3, and 4. Imagine that a clone, B, is created from the Aurora DB cluster. When the clone is created, no data is copied. Rather, the clone points to the same set of pages as the source Aurora DB cluster.

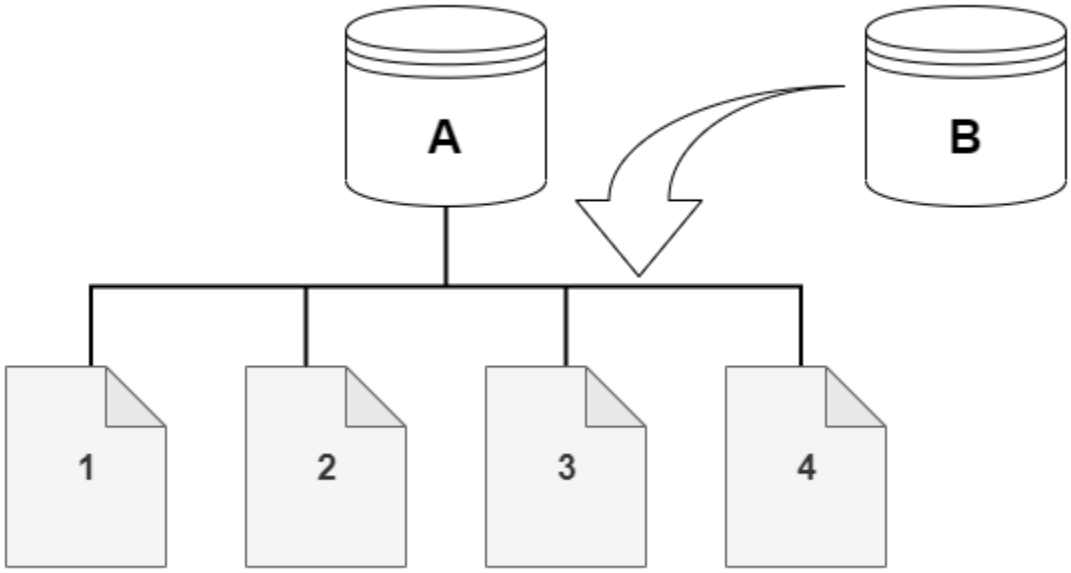


When the clone is created, no additional storage is usually needed. The copy-on-write protocol uses the same segment on the physical storage media as the source segment. Additional storage is required only if the capacity of the source segment isn't sufficient for the entire clone segment. If that's the case, the source segment is copied to another physical device.

In the following diagrams, you can find an example of the copy-on-write protocol in action using the same cluster A and its clone, B, as shown preceding. Let's say that you make a change to your Aurora DB cluster (A) that results in a change to data held on page 1. Instead of writing to the original page 1, Aurora creates a new page 1[A]. The Aurora DB cluster volume for cluster (A) now points to page 1[A], 2, 3, and 4, while the clone (B) still references the original pages.

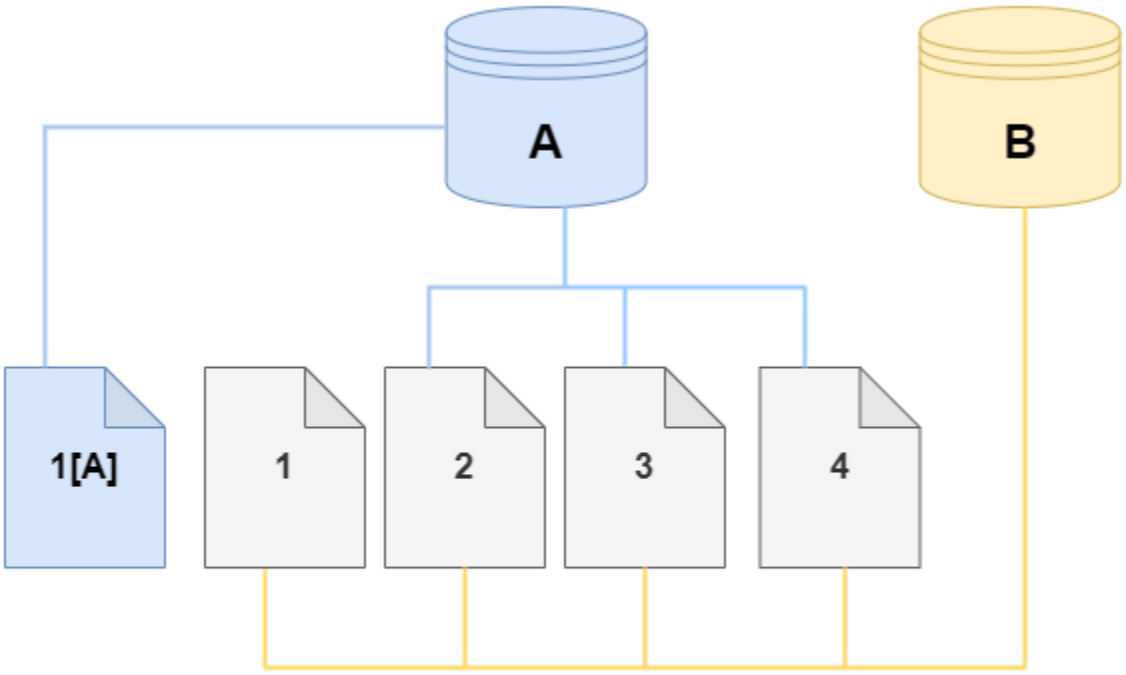

On the clone, a change is made to page 4 on the storage volume. Instead of writing to the original page 4, Aurora creates a new page, 4[B]. The clone now points to pages 1, 2, 3, and to page 4[B], while the cluster (A) continues pointing to 1[A], 2, 3, and 4.

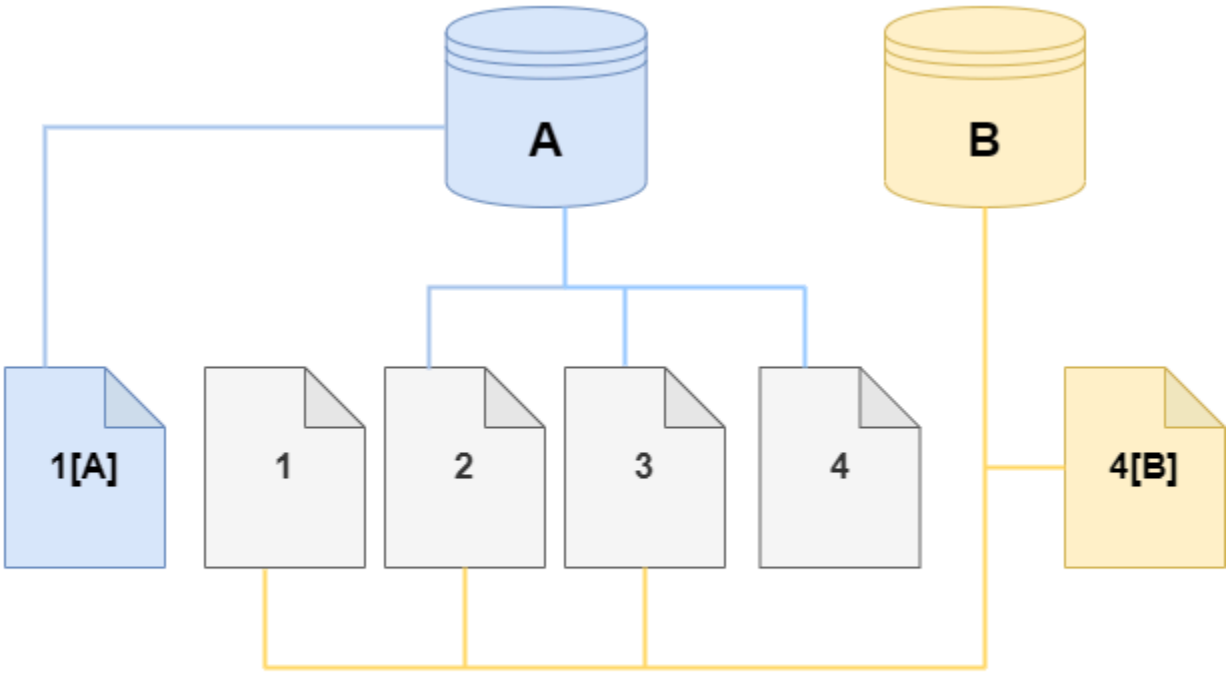

As more changes occur over time in both the source Aurora DB cluster volume and the clone, more storage is needed to capture and store the changes.

Deleting a source cluster volume

Initially, the clone volume shares the same data pages as the original volume from which the clone is created. As long as the original volume exists, the clone volume is only considered the owner of the pages that the clone created or modified. Thus, the `VolumeBytesUsed` metric for the clone volume starts out small and only grows as the data diverges between the original cluster and the clone. For pages that are identical between the source volume and the clone, the storage charges apply only to the original cluster. For more information about the `VolumeBytesUsed` metric, see Cluster-level metrics for Amazon Aurora.

When you delete a source cluster volume that has one or more clones associated with it, the data in the cluster volumes of the clones isn't changed. Aurora preserves the pages that were previously owned by the source cluster volume. Aurora redistributes the storage billing for the pages that were owned by the deleted cluster. For example, suppose that an original cluster had two clones

and then the original cluster was deleted. Half of the data pages owned by the original cluster would now be owned by one clone. The other half of the pages would be owned by the other clone.

If you delete the original cluster, then as you create or delete more clones, Aurora continues to redistribute ownership of the data pages among all the clones that share the same pages. Thus, you might find that the value of the `VolumeBytesUsed` metric changes for the cluster volume of a clone. The metric value can decrease as more clones are created and page ownership is spread across more clusters. The metric value can also increase as clones are deleted and page ownership is assigned to a smaller number of clusters. For information about how write operations affect data pages on clone volumes, see Understanding the copy-on-write protocol.

When the original cluster and the clones are owned by the same Amazon account, all the storage charges for those clusters apply to that same Amazon account. If some of the clusters are cross-account clones, deleting the original cluster can result in additional storage charges to the Amazon accounts that own the cross-account clones.

For example, suppose that a cluster volume has 1000 used data pages before you create any clones. When you clone that cluster, initially the clone volume has zero used pages. If the clone makes modifications to 100 data pages, only those 100 pages are stored on the clone volume and marked as used. The other 900 unchanged pages from the parent volume are shared by both clusters. In this case, the parent cluster has storage charges for 1000 pages and the clone volume for 100 pages.

If you delete the source volume, the storage charges for the clone include the 100 pages that it changed, plus the 900 shared pages from the original volume, for a total of 1000 pages.

Creating an Amazon Aurora clone

You can create a clone in the same Amazon account as the source Aurora DB cluster. To do so, you can use the Amazon Web Services Management Console or the Amazon CLI and the procedures following.

To allow another Amazon account to create a clone or to share a clone with another Amazon account, use the procedures in Cross-account cloning with Amazon RAM and Amazon Aurora.

Console


The following procedure describes how to clone an Aurora DB cluster using the Amazon Web Services Management Console.

Creating a clone using the Amazon Web Services Management Console results in an Aurora DB cluster with one Aurora DB instance.

These instructions apply for DB clusters owned by the same Amazon account that is creating the clone. If the DB cluster is owned by a different Amazon account, see Cross-account cloning with Amazon RAM and Amazon Aurora instead.

To create a clone of a DB cluster owned by your Amazon account using the Amazon Web Services Management Console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose your Aurora DB cluster from the list, and for **Actions**, choose **Create clone**.

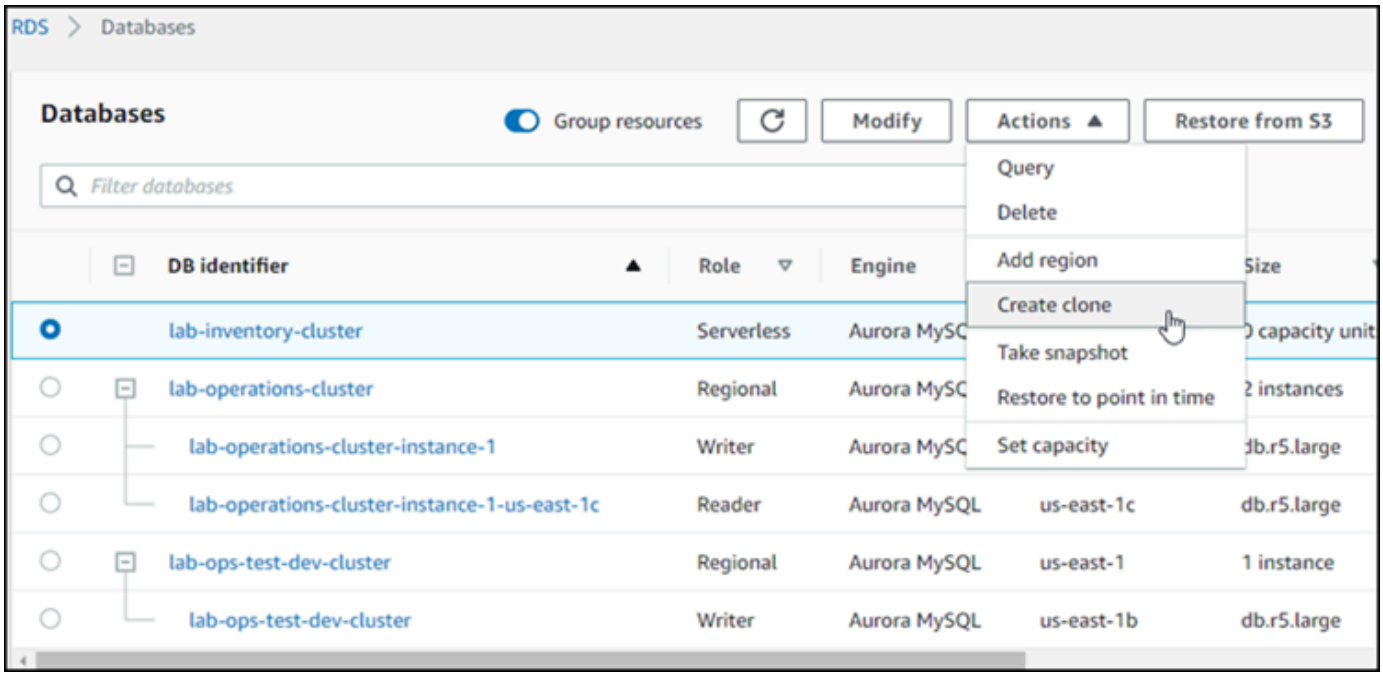


   The Create clone page opens, where you can configure **Settings**, **Connectivity**, and other options for the Aurora DB cluster clone.
4. For **DB instance identifier**, enter the name that you want to give to your cloned Aurora DB cluster.
5. For Aurora serverless or provisioned DB clusters, choose either **Aurora I/O-Optimized** or **Aurora Standard** for **Cluster storage configuration**.

   For more information, see Storage configurations for Amazon Aurora DB clusters.


6. Choose the DB instance size or DB cluster capacity:

   - For a provisioned clone, choose a **DB instance class**.

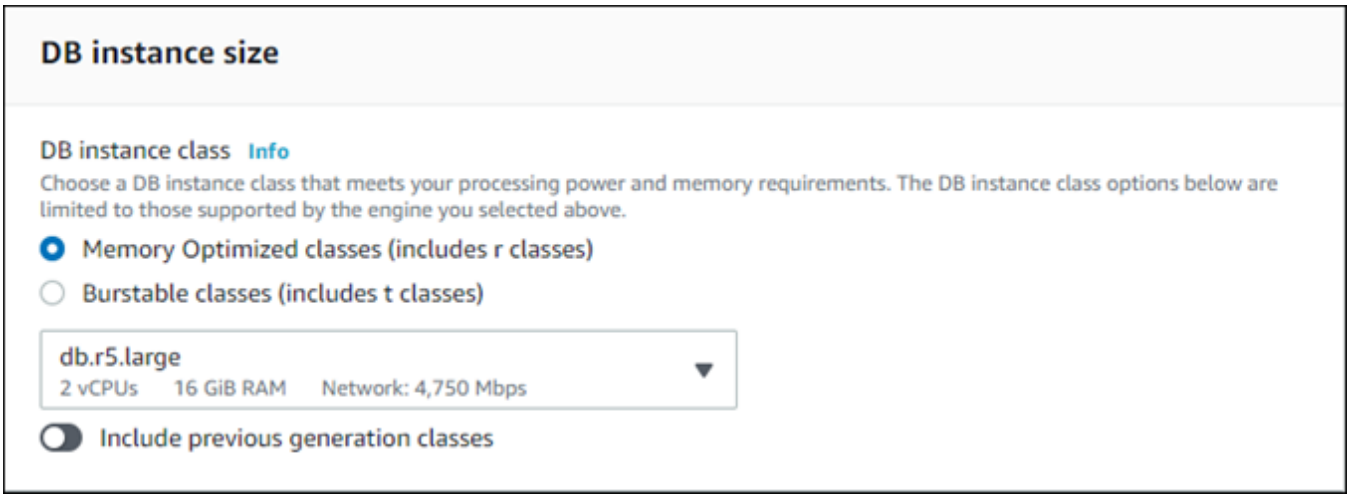

     You can accept the provided setting, or you can use a different DB instance class for your clone.

   - For an Aurora serverless clone, choose the **Capacity settings**.

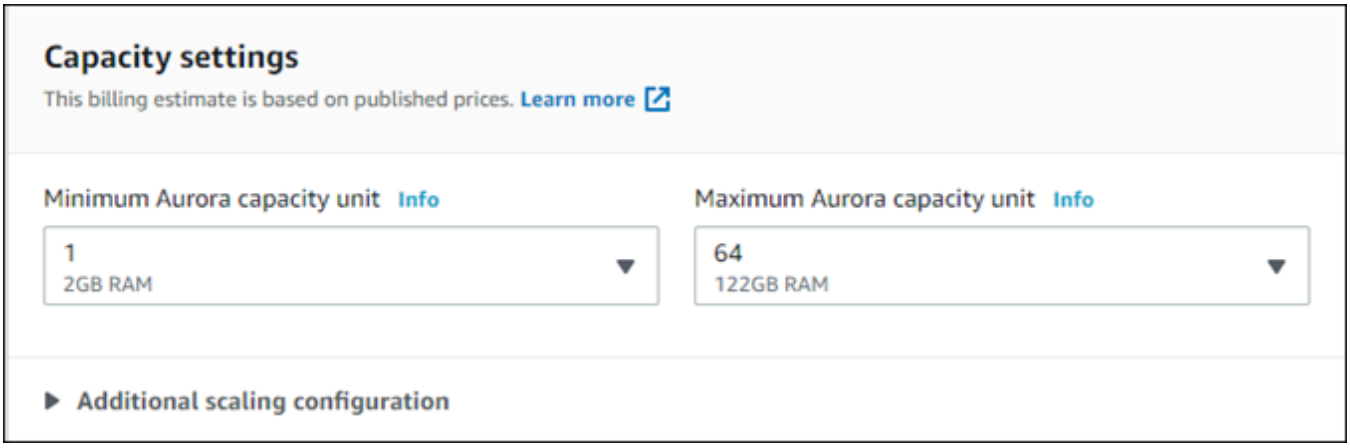

     You can accept the provided settings, or you can change them for your clone.

7. Choose other settings as needed for your clone. To learn more about Aurora DB cluster and instance settings, see Creating an Amazon Aurora DB cluster.
8. Choose **Create clone**.

When the clone is created, it's listed with your other Aurora DB clusters in the console **Databases** section and displays its current state. Your clone is ready to use when its state is **Available**.

Amazon CLI

Using the Amazon CLI for cloning your Aurora DB cluster involves separate steps for creating the clone cluster and adding one or more DB instances to it.

The `restore-db-cluster-to-point-in-time` Amazon CLI command that you use results in an Aurora DB cluster with the same storage data as the original cluster, but no Aurora DB instances. You create the DB instances separately after the clone is available. You can choose the number of DB instances and their instance classes to give the clone more or less compute capacity than the original cluster. The steps in the process are as follows:

1. Create the clone by using the restore-db-cluster-to-point-in-time CLI command.
2. Create the writer DB instance for the clone by using the create-db-instance CLI command.
3. (Optional) Run additional create-db-instance CLI commands to add one or more reader instances to the clone cluster. Using reader instances helps improve the high availability and read scalability aspects of the clone. You might skip this step if you only intend to use the clone for development and testing.

Topics

- Creating the clone
- Checking the status and getting clone details
- Creating the Aurora DB instance for your clone
- Parameters to use for cloning

Creating the clone

Use the `restore-db-cluster-to-point-in-time` CLI command to create the initial clone cluster.

To create a clone from a source Aurora DB cluster

- Use the `restore-db-cluster-to-point-in-time` CLI command. Specify values for the following parameters. In this typical case, the clone uses the same engine mode as the original cluster, either provisioned or Aurora serverless.

- `--db-cluster-identifier` – Choose a meaningful name for your clone. You name the clone when you use the restore-db-cluster-to-point-in-time CLI command. You then pass the name of the clone in the create-db-instance CLI command.
- `--restore-type` – Use `copy-on-write` to create a clone of the source DB cluster. Without this parameter, the `restore-db-cluster-to-point-in-time` restores the Aurora DB cluster rather than creating a clone.
- `--source-db-cluster-identifier` – Use the name of the source Aurora DB cluster that you want to clone.
- `--use-latest-restorable-time` – This value points to the latest restorable volume data for the source DB cluster. Use it to create clones.

The following example creates a clone named `my-clone` from a cluster named `my-source-cluster`.

For Linux, macOS, or Unix:

```
aws rds restore-db-cluster-to-point-in-time \
    --source-db-cluster-identifier my-source-cluster \
    --db-cluster-identifier my-clone \
    --restore-type copy-on-write \
    --use-latest-restorable-time
```

For Windows:

```
aws rds restore-db-cluster-to-point-in-time ^
    --source-db-cluster-identifier my-source-cluster ^
    --db-cluster-identifier my-clone ^
    --restore-type copy-on-write ^
    --use-latest-restorable-time
```

The command returns the JSON object containing details of the clone. Check to make sure that your cloned DB cluster is available before trying to create the DB instance for your clone. For more information, see Checking the status and getting clone details.

For example, suppose you have a cluster named `tpch100g` that you want to clone. The following Linux example creates a cloned cluster named `tpch100g-clone`, an Aurora serverless writer instance named `tpch100g-clone-instance`, and a provisioned reader instance named `tpch100g-clone-instance-2` for the new cluster.

You don't need to supply some parameters, such as `--master-username` and `--master-user-password`. Aurora automatically determines those from the original cluster. You do need to specify the DB engine to use. Thus, the example tests the new cluster to determine the right value to use for the `--engine` parameter.

This example also includes the `--serverless-v2-scaling-configuration` option when creating the clone cluster. That way, you can add Aurora serverless instances to the clone even if the original cluster didn't use Aurora serverless.

```
$ aws rds restore-db-cluster-to-point-in-time \
  --source-db-cluster-identifier tpch100g \
  --db-cluster-identifier tpch100g-clone \
  --serverless-v2-scaling-configuration MinCapacity=0.5,MaxCapacity=16 \
  --restore-type copy-on-write \
  --use-latest-restorable-time

$ aws rds describe-db-clusters \
  --db-cluster-identifier tpch100g-clone \
    --query '*[].[Engine]' \
    --output text
aurora-mysql

$ aws rds create-db-instance \
  --db-instance-identifier tpch100g-clone-instance \
  --db-cluster-identifier tpch100g-clone \
  --db-instance-class db.serverless \
  --engine aurora-mysql

$ aws rds create-db-instance \
  --db-instance-identifier tpch100g-clone-instance-2 \
  --db-cluster-identifier tpch100g-clone \
  --db-instance-class db.r6g.2xlarge \
  --engine aurora-mysql
```

Checking the status and getting clone details

You can use the following command to check the status of your newly created clone cluster.

```
$ aws rds describe-db-clusters --db-cluster-identifier my-clone --query '*[].[Status]'
 --output text
```

Or you can obtain the status and the other values that you need to create the DB instance for your clone by using the following Amazon CLI query.

For Linux, macOS, or Unix:

```
aws rds describe-db-clusters --db-cluster-identifier my-clone \
  --query '*[].
{Status:Status,Engine:Engine,EngineVersion:EngineVersion,EngineMode:EngineMode}'
```

For Windows:

```
aws rds describe-db-clusters --db-cluster-identifier my-clone ^
  --query "*[].
{Status:Status,Engine:Engine,EngineVersion:EngineVersion,EngineMode:EngineMode}"
```

This query returns output similar to the following.

```
[
  {
        "Status": "available",
        "Engine": "aurora-mysql",
        "EngineVersion": "8.0.mysql_aurora.3.04.1",
        "EngineMode": "provisioned"
    }
]
```

Creating the Aurora DB instance for your clone

Use the create-db-instance CLI command to create the DB instance for your Aurora serverless or provisioned clone.

The DB instance inherits the `--master-username` and `--master-user-password` properties from the source DB cluster.

The following example creates a DB instance for a provisioned clone.

For Linux, macOS, or Unix:

```
aws rds create-db-instance \
    --db-instance-identifier my-new-db \
    --db-cluster-identifier my-clone \
```

```
    --db-instance-class db.r6g.2xlarge \
    --engine aurora-mysql
```

For Windows:

```
aws rds create-db-instance ^
    --db-instance-identifier my-new-db ^
    --db-cluster-identifier my-clone ^
    --db-instance-class db.r6g.2xlarge ^
    --engine aurora-mysql
```

The following example creates an Aurora serverless DB instance, for a clone that uses an engine version that supports Aurora serverless.

For Linux, macOS, or Unix:

```
aws rds create-db-instance \
    --db-instance-identifier my-new-db \
    --db-cluster-identifier my-clone \
    --db-instance-class db.serverless \
  --engine aurora-postgresql
```

For Windows:

```
aws rds create-db-instance ^
    --db-instance-identifier my-new-db ^
    --db-cluster-identifier my-clone ^
    --db-instance-class db.serverless ^
    --engine aurora-mysql
```

Parameters to use for cloning

The following table summarizes the various parameters used with `restore-db-cluster-to-point-in-time` to clone Aurora DB clusters.

Parameter	Description
`--source-db-cluster-identifier`	Use the name of the source Aurora DB cluster that you want to clone.

Parameter	Description
`--db-cluster-identifier`	Choose a meaningful name for your clone when you create it with the `restore-db-cluster-to-point-in-time` command. Then you pass this name to the `create-db-instance` command.
`--restore-type`	Specify `copy-on-write` as the `--restore-type` to create a clone of the source DB cluster rather than restoring the source Aurora DB cluster.
`--use-latest-restorable-time`	This value points to the latest restorable volume data for the source DB cluster. Use it to create clones.
`--serverless-v2-scaling-configuration`	(Newer versions that support Aurora serverless) Use this parameter to configure the minimum and maximum capacity for an Aurora serverless clone. If you don't specify this parameter, you can't create any Aurora serverless instances in the clone cluster until you modify the cluster to add this attribute.

For information about cross-VPC and cross-account cloning, see the following sections.

Topics

- Cross-VPC cloning with Amazon Aurora
- Cross-account cloning with Amazon RAM and Amazon Aurora

Cross-VPC cloning with Amazon Aurora

Suppose that you want to impose different network access controls on the original cluster and the clone. For example, you might use cloning to make a copy of a production Aurora cluster in a different VPC for development and testing. Or you might create a clone as part of a migration from public subnets to private subnets, to enhance your database security.

The following sections demonstrate how to set up the network configuration for the clone so that the original cluster and the clone can both access the same Aurora storage nodes, even from different subnets or different VPCs. Verifying the network resources in advance can avoid errors during cloning that might be difficult to diagnose.

If you aren't familiar with how Aurora interacts with VPCs, subnets, and DB subnet groups, see Amazon VPC and Amazon Aurora first. You can work through the tutorials in that section to create these kinds of resources in the Amazon console, and understand how they fit together.

Because the steps involve switching between the RDS and EC2 services, the examples use Amazon CLI commands to help you understand how to automate such operations and save the output.

Topics

- Before you begin
- Gathering information about the network environment
- Creating network resources for the clone
- Creating an Aurora clone with new network settings
- Moving a cluster from public subnets to private ones
- End-to-end example of creating a cross-VPC clone

Before you begin

Before you start setting up a cross-VPC clone, make sure to have the following resources:

- An Aurora DB cluster to use as the source for cloning. If this is your first time creating an Aurora DB cluster, consult the tutorials in Getting started with Amazon Aurora to set up a cluster using either the MySQL or PostgreSQL database engine.
- A second VPC, if you intend to create a cross-VPC clone. If you don't have a VPC to use for the clone, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only) or Tutorial: Create a VPC for use with a DB cluster (dual-stack mode).

Gathering information about the network environment

With cross-VPC cloning, the network environment can differ substantially between the original cluster and its clone. Before you create the clone, collect and record information about the VPC, subnets, DB subnet group, and AZs used in the original cluster. That way, you can minimize the chances of problems. If a network problem does occur, you won't have to interrupt any troubleshooting activities to search for diagnostic information. The following sections show CLI examples to gather these types of information. You can save the details in whichever format is convenient to consult while creating the clone and doing any troubleshooting.

- Step 1: Check the Availability Zones of the original cluster

- Step 2: Check the DB subnet group of the original cluster
- Step 3: Check the subnets of the original cluster
- Step 4: Check the Availability Zones of the DB instances in the original cluster
- Step 5: Check the VPCs you can use for the clone

Step 1: Check the Availability Zones of the original cluster

Before you create the clone, verify which AZs the original cluster uses for its storage. As explained in Amazon Aurora storage, the storage for each Aurora cluster is associated with exactly three AZs. Because the Amazon Aurora DB clusters takes advantage of the separation of compute and storage, this rule is true regardless of how many instances are in the cluster.

For example, run a CLI command such as the following, substituting your own cluster name for *my_cluster*. The following example produces a list sorted alphabetically by the AZ name.

```
aws rds describe-db-clusters \
  --db-cluster-identifier my_cluster \
  --query 'sort_by(*[].AvailabilityZones[].{Zone:@},&Zone)' \
  --output text
```

The following example shows sample output from the preceding `describe-db-clusters` command. It demonstrates that the storage for the Aurora cluster always uses three AZs.

```
us-east-1c
us-east-1d
us-east-1e
```

To create a clone in a network environment that doesn't have all the resources in place to connect to these AZs, you must create subnets associated with at least two of those AZs, and then create a DB subnet group containing those two or three subnets. The following examples show how.

Step 2: Check the DB subnet group of the original cluster

If you want to use the same number of subnets for the clone as in the original cluster, you can get the number of subnets from the DB subnet group of the original cluster. An Aurora DB subnet group contains at least two subnets, each associated with a different AZ. Make a note of which AZs the subnets are associated with.

The following example shows how to find the DB subnet group of the original cluster, and then work backwards to the corresponding AZs. Substitute the name of your cluster for *my_cluster*

in the first command. Substitute the name of the DB subnet group for *my_subnet* in the second command.

```
aws rds describe-db-clusters --db-cluster-identifier my_cluster \
  --query '*[].DBSubnetGroup' --output text

aws rds describe-db-subnet-groups --db-subnet-group-name my_subnet_group \
  --query '*[].Subnets[].[SubnetAvailabilityZone.Name]' --output text
```

Sample output might look similar to the following, for a cluster with a DB subnet group containing containing two subnets. In this case, `two-subnets` is a name that was specified when creating the DB subnet group.

```
two-subnets

us-east-1d
us-east-1c
```

For a cluster where the DB subnet group contains three subnets, the output might look similar to the following.

```
three-subnets

us-east-1f
us-east-1d
us-east-1c
```

Step 3: Check the subnets of the original cluster

If you need more details about the subnets in the original cluster, run Amazon CLI commands similar to the following. You can examine the subnet attributes such as IP address ranges, owner, and so on. That way, you can determine whether to use different subnets in the same VPC, or create subnets with similar characteristics in a different VPC.

Find the subnet IDs of all the subnets that are available in your VPC.

```
aws ec2 describe-subnets --filters Name=vpc-id,Values=my_vpc \
  --query '*[].[SubnetId]' --output text
```

Find the exact subnets used in your DB subnet group.

```
aws rds describe-db-subnet-groups --db-subnet-group-name my_subnet_group \
  --query '*[].Subnets[].[SubnetIdentifier]' --output text
```

Then specify the subnets that you want to investigate in a list, as in the following command. Substitute the names of your subnets for *my_subnet_1* and so on.

```
aws ec2 describe-subnets \
  --subnet-ids '["my_subnet_1","my_subnet2","my_subnet3"]'
```

The following example shows partial output from such a `describe-subnets` command. The output shows some of the important attributes you can see for each subnet, such as its associated AZ and the VPC that it's part of.

```
{
    'Subnets': [
        {
            'AvailabilityZone': 'us-east-1d',
            'AvailableIpAddressCount': 54,
            'CidrBlock': '10.0.0.64/26',
            'State': 'available',
            'SubnetId': 'subnet-000a0bca00e0b0000',
            'VpcId': 'vpc-3f3c3fc3333b3ffb3',
            ...
        },
        {
            'AvailabilityZone': 'us-east-1c',
            'AvailableIpAddressCount': 55,
            'CidrBlock': '10.0.0.0/26',
            'State': 'available',
            'SubnetId': 'subnet-4b4dbfe4d4a4fd4c4',
            'VpcId': 'vpc-3f3c3fc3333b3ffb3',
            ...
```

Step 4: Check the Availability Zones of the DB instances in the original cluster

You can use this procedure to understand the AZs used for the DB instances in the original cluster. That way, you can set up the exact same AZs for the DB instances in the clone. You can also use more or fewer DB instances in the clone depending on whether the clone is used for production, development and testing, and so on.

For each instance in the original cluster, run a command such as the following. Make sure that the instance has finished creating and is in the `Available` state first. Substitute the instance identifier for *`my_instance`*.

```
aws rds describe-db-instances --db-instance-identifier my_instance \
  --query '*[].AvailabilityZone' --output text
```

The following example shows the output of running the preceding `describe-db-instances` command. The Aurora cluster has four database instances. Therefore, we run the command four times, substituting a different DB instance identifier each time. The output shows how those DB instances are spread across a maximum of three AZs.

```
us-east-1a
us-east-1c
us-east-1d
us-east-1a
```

After the clone is created and you are adding DB instances to it, you can specify these same AZ names in the `create-db-instance` commands. You might do so to set up DB instances in the new cluster configured for exactly the same AZs as in the original cluster.

Step 5: Check the VPCs you can use for the clone

If you intend to create the clone in a different VPC than the original, you can get a list of the VPC IDs available for your account. You might also do this step if you need to create any additional subnets in the same VPC as the original cluster. When you run the command to create a subnet, you specify the VPC ID as a parameter.

To list all the VPCs for your account, run the following CLI command:

```
aws ec2 describe-vpcs --query '*[].[VpcId]' --output text
```

The following example shows sample output from the preceding `describe-vpcs` command. The output demonstrates that there are four VPCs in the current Amazon account that can be used as the source or the destination for cross-VPC cloning.

```
vpc-fd111111
vpc-2222e2cd2a222f22e
vpc-33333333a33333d33
```

```
vpc-4ae4d4de4a4444dad
```

You can use the same VPC as the destination for the clone, or a different VPC. If the original cluster and the clone are in the same VPC, you can reuse the same DB subnet group for the clone. You can also create a different DB subnet group. For example, the new DB subnet group might use private subnets, while the original cluster's DB subnet group might use public subnets. If you create the clone in a different VPC, make sure that there are enough subnets in the new VPC and that the subnets are associated with the right AZs from the original cluster.

Creating network resources for the clone

If while collecting the network information you discovered that additional network resources are needed for the clone, you can create those resources before trying to set up the clone. For example, you might need to create more subnets, subnets associated with specific AZs, or a new DB subnet group.

- Step 1: Create the subnets for the clone
- Step 2: Create the DB subnet group for the clone

Step 1: Create the subnets for the clone

If you need to create new subnets for the clone, run a command similar to the following. You might need to do this when creating the clone in a different VPC, or when making some other network change such as using private subnets instead of public subnets.

Amazon automatically generates the ID of the subnet. Substitute the name of the clone's VPC for *my_vpc*. Choose the address range for the `--cidr-block` option to allow at least 16 IP addresses in the range. You can include any other properties that you want to specify. Run the command `aws ec2 create-subnet help` to see all the choices.

```
aws ec2 create-subnet --vpc-id my_vpc \
  --availability-zone AZ_name --cidr-block IP_range
```

The following example shows some important attributes of a newly created subnet.

```
{
    'Subnet': {
        'AvailabilityZone': 'us-east-1b',
        'AvailableIpAddressCount': 59,
```

```
        'CidrBlock': '10.0.0.64/26',
        'State': 'available',
        'SubnetId': 'subnet-44b4a44f4e44db444',
        'VpcId': 'vpc-555fc5df555e555dc',
        ...
        }
}
```

Step 2: Create the DB subnet group for the clone

If you are creating the clone in a different VPC, or a different set of subnets within the same VPC, then you create a new DB subnet group and specify it when creating the clone.

Make sure that you know all the following details. You can find all of these from the output of the preceding examples.

1. VPC of the original cluster. For instructions, see Step 3: Check the subnets of the original cluster.
2. VPC of the clone, if you are creating it in a different VPC. For instructions, see Step 5: Check the VPCs you can use for the clone.
3. Three AZs associated with the Aurora storage for the original cluster. For instructions, see Step 1: Check the Availability Zones of the original cluster.
4. Two or three AZs associated with the DB subnet group for the original cluster. For instructions, see Step 2: Check the DB subnet group of the original cluster.
5. The subnet IDs and associated AZs of all the subnets in the VPC you intend to use for the clone. Use the same `describe-subnets` command as in Step 3: Check the subnets of the original cluster, substituting the VPC ID of the destination VPC.

Check how many AZs are both associated with the storage of the original cluster, and associated with subnets in the destination VPC. To successfully create the clone, there must be two or three AZs in common. If you have fewer than two AZs in common, go back to Step 1: Create the subnets for the clone. Create one, two, or three new subnets that are associated with the AZs associated with the storage of the original cluster.

Choose subnets in the destination VPC that are associated with the same AZs as the Aurora storage in the originally cluster. Ideally, choose three AZs. Doing so gives you the most flexibility to spread the DB instances of the clone across multiple AZs for high availability of compute resources.

Run a command similar to the following to create the new DB subnet group. Substitute the IDs of your subnets in the list. If you specify the subnet IDs using environment variables, be careful

to quote the `--subnet-ids` parameter list in a way that preserves the double quotation marks around the IDs.

```
aws rds create-db-subnet-group --db-subnet-group-name my_subnet_group \
  --subnet-ids '["my_subnet_1","my_subnet_2","my_subnet3"]' \
  --db-subnet-group-description 'DB subnet group with 3 subnets for clone'
```

The following example shows partial output of the `create-db-subnet-group` command.

```
{
    'DBSubnetGroup': {
        'DBSubnetGroupName': 'my_subnet_group',
        'DBSubnetGroupDescription': 'DB subnet group with 3 subnets for clone',
        'VpcId': 'vpc-555fc5df555e555dc',
        'SubnetGroupStatus': 'Complete',
        'Subnets': [
            {
                'SubnetIdentifier': 'my_subnet_1',
                'SubnetAvailabilityZone': {
                    'Name': 'us-east-1c'
                },
                'SubnetStatus': 'Active'
            },
            {
                'SubnetIdentifier': 'my_subnet_2',
                'SubnetAvailabilityZone': {
                    'Name': 'us-east-1d'
                },
                'SubnetStatus': 'Active'
            }
            ...
        ],
        'SupportedNetworkTypes': [
            'IPV4'
        ]
    }
}
```

At this point, you haven't actually created the clone yet. You have created all the relevant VPC and subnet resources so that you can specify the appropriate parameters to the `restore-db-cluster-to-point-in-time` and `create-db-instance` commands when creating the clone.

Creating an Aurora clone with new network settings

Once you have made sure that the right configuration of VPCs, subnets, AZs, and subnet groups is in place for the new cluster to use, you can perform the actual cloning operation. The following CLI examples highlight the options such as `--db-subnet-group-name`, `--availability-zone`, and `--vpc-security-group-ids` that you specify on the commands to set up the clone and its DB instances.

- Step 1: Specify the DB subnet group for the clone
- Step 2: Specify network settings for instances in the clone
- Step 3: Establishing connectivity from a client system to a clone

Step 1: Specify the DB subnet group for the clone

When you create the clone, you can configure all the right VPC, subnet, and AZ settings by specifying a DB subnet group. Use the commands in the preceding examples to verify all the relationships and mappings that go into the DB subnet group.

For example, the following commands demonstrate cloning an original cluster to a clone. In the first example, the source cluster is associated with two subnets and the clone is associated with three subnets. The second example shows the opposite case, cloning from a cluster with three subnets to a cluster with two subnets.

```
aws rds restore-db-cluster-to-point-in-time \
  --source-db-cluster-identifier cluster-with-3-subnets \
  --db-cluster-identifier cluster-cloned-to-2-subnets \
  --restore-type copy-on-write --use-latest-restorable-time \
  --db-subnet-group-name two-subnets
```

If you intend to use Aurora serverless instances in the clone, include a `--serverless-v2-scaling-configuration` option when you create the clone, as shown. Doing so lets you use the `db.serverless` class when creating DB instances in the clone. You can also modify the clone later to add this scaling configuration attribute. The capacity numbers in this example allow each Aurora serverless instance in the cluster to scale between 2 and 32 Aurora Capacity Units (ACUs). For information about the Aurora serverless feature and how to choose the capacity range, see Using Aurora serverless.

```
aws rds restore-db-cluster-to-point-in-time \
```

```
  --source-db-cluster-identifier cluster-with-2-subnets \
  --db-cluster-identifier cluster-cloned-to-3-subnets \
  --restore-type copy-on-write --use-latest-restorable-time \
  --db-subnet-group-name three-subnets \
  --serverless-v2-scaling-configuration 'MinCapacity=2,MaxCapacity=32'
```

Regardless of the number of subnets used by the DB instances, the Aurora storage for the source cluster and the clone is associated with three AZs. The following example lists the AZs associated with both the original cluster and the clone, for both of the `restore-db-cluster-to-point-in-time` commands in the preceding examples.

```
aws rds describe-db-clusters --db-cluster-identifier cluster-with-3-subnets \
  --query 'sort_by(*[].AvailabilityZones[].{Zone:@},&Zone)' --output text

us-east-1c
us-east-1d
us-east-1f

aws rds describe-db-clusters --db-cluster-identifier cluster-cloned-to-2-subnets \
  --query 'sort_by(*[].AvailabilityZones[].{Zone:@},&Zone)' --output text

us-east-1c
us-east-1d
us-east-1f

aws rds describe-db-clusters --db-cluster-identifier cluster-with-2-subnets \
  --query 'sort_by(*[].AvailabilityZones[].{Zone:@},&Zone)' --output text

us-east-1a
us-east-1c
us-east-1d

aws rds describe-db-clusters --db-cluster-identifier cluster-cloned-to-3-subnets \
  --query 'sort_by(*[].AvailabilityZones[].{Zone:@},&Zone)' --output text

us-east-1a
us-east-1c
us-east-1d
```

Because at least two of the AZs overlap between each pair of original and clone clusters, both clusters can access the same underlying Aurora storage.

Step 2: Specify network settings for instances in the clone

When you create DB instances in the clone, by default they inherit the DB subnet group from the cluster itself. That way, Aurora automatically assigns each instance to a particular subnet, and creates it in the AZ that's associated with the subnet. This choice is convenient, especially for development and test systems, because you don't have to keep track of the subnet IDs or the AZs while adding new instances to the clone.

As an alternative, you can specify the AZ when you create an Aurora DB instance for the clone. The AZ that you specify must be from the set of AZs that are associated with the clone. If the DB subnet group you use for the clone only contains two subnets, then you can only pick from the AZs associated with those two subnets. This choice offers flexibility and resilience for highly available systems, because you can make sure that the writer instance and the standby reader instance are in different AZs. Or if you add additional readers to the cluster, you can make sure that they are spread across three AZs. That way, even in the rare case of an AZ failure, you still have a writer instance and another reader instance in two other AZs.

The following example adds a provisioned DB instance to a cloned Aurora PostgreSQL cluster that uses a custom DB subnet group.

```
aws rds create-db-instance --db-cluster-identifier my_aurora_postgresql_clone \
  --db-instance-identifier my_postgres_instance \
  --db-subnet-group-name my_new_subnet \
  --engine aurora-postgresql \
  --db-instance-class db.t4g.medium
```

The following example shows partial output from such a command.

```
{
  'DBInstanceIdentifier': 'my_postgres_instance',
  'DBClusterIdentifier': 'my_aurora_postgresql_clone',
  'DBInstanceClass': 'db.t4g.medium',
  'DBInstanceStatus': 'creating'
  ...
}
```

The following example adds an Aurora serverless DB instance to an Aurora MySQL clone that uses a custom DB subnet group. To be able to use Aurora serverless instances, make sure to specify the `--serverless-v2-scaling-configuration` option for the `restore-db-cluster-to-point-in-time` command, as shown in preceding examples.

```
aws rds create-db-instance --db-cluster-identifier my_aurora_mysql_clone \
  --db-instance-identifier my_mysql_instance \
  --db-subnet-group-name my_other_new_subnet \
  --engine aurora-mysql \
  --db-instance-class db.serverless
```

The following example shows partial output from such a command.

```
{
  'DBInstanceIdentifier': 'my_mysql_instance',
  'DBClusterIdentifier': 'my_aurora_mysql_clone',
  'DBInstanceClass': 'db.serverless',
  'DBInstanceStatus': 'creating'
  ...
}
```

Step 3: Establishing connectivity from a client system to a clone

If you are already connecting to an Aurora cluster from a client system, you might want to allow the same type of connectivity to a new clone. For example, you might connect to the original cluster from an Amazon Cloud9 instance or EC2 instance. To allow connections from the same client systems, or new ones that you create in the destination VPC, set up equivalent DB subnet groups and VPC security groups as in the VPC. Then specify the subnet group and security groups when you create the clone.

The following examples set up an Aurora serverless clone. That configuration is based on the combination of `--engine-mode provisioned` and `--serverless-v2-scaling-configuration` when creating the DB cluster, and then `--db-instance-class db.serverless` when creating each DB instance in the cluster. The `provisioned` engine mode is the default, so you can omit that option if you prefer.

```
aws rds restore-db-cluster-to-point-in-time \
  --source-db-cluster-identifier serverless-sql-postgres\
  --db-cluster-identifier serverless-sql-postgres-clone \
  --db-subnet-group-name 'default-vpc-1234' \
  --vpc-security-group-ids 'sg-4567' \
  --serverless-v2-scaling-configuration 'MinCapacity=0.5,MaxCapacity=16' \
  --restore-type copy-on-write \
  --use-latest-restorable-time
```

Then, when creating the DB instances in the clone, specify the same `--db-subnet-group-name` option. Optionally, you can include the `--availability-zone` option and specify one of the AZs associated with the subnets in that subnet group. That AZ must also be one of the AZs associated with the original cluster.

```
aws rds create-db-instance \
  --db-cluster-identifier serverless-sql-postgres-clone \
  --db-instance-identifier serverless-sql-postgres-clone-instance \
  --db-instance-class db.serverless \
  --db-subnet-group-name 'default-vpc-987zyx654' \
  --availability-zone 'us-east-1c' \
  --engine aurora-postgresql
```

Moving a cluster from public subnets to private ones

You can use cloning to migrate a cluster between public and private subnets. You might do this when adding additional layers of security to your application before deploying it to production. For this example, you should already have the private subnets and NAT gateway set up before starting the cloning process with Aurora.

For the steps involving Aurora, you can follow the same general steps as in the preceding examples to Gathering information about the network environment and Creating an Aurora clone with new network settings. The main difference is that even if you have public subnets that map to all the AZs from the original cluster, now you must verify that you have enough private subnets for an Aurora cluster, and that those subnets are associated with all the same AZs that are used for Aurora storage in the original cluster. Similar to other cloning use cases, you can make the DB subnet group for the clone with either three or two private subnets that are associated with the required AZs. However, if you use two private subnets in the DB subnet group, you must have a third private subnet that's associated with the third AZ used for Aurora storage in the original cluster.

You can consult this checklist to verify that all the requirements are in place to perform this type of cloning operation.

- Record the three AZs that are associated with the original cluster. For instructions, see Step 1: Check the Availability Zones of the original cluster.
- Record the three or two AZs that are associated with the public subnets in the DB subnet group for the original cluster. For instructions, see Step 3: Check the subnets of the original cluster.
- Create private subnets that map to all three of the AZs that are associated with the original cluster. Also do any other networking setup, such as creating a NAT gateway, to be able to

communicate with the private subnets. For instructions, see Create a subnet in the *Amazon Virtual Private Cloud User Guide*.

- Create a new DB subnet group containing three or two of the private subnets that are associated with the AZs from the first point. For instructions, see Step 2: Create the DB subnet group for the clone.

When all the prerequisites are in place, you can pause database activity on the original cluster while you create the clone and switch your application to use it. After the clone is created and you verify that you can connect to it, run your application code, and so on, you can discontinue use of the original cluster.

End-to-end example of creating a cross-VPC clone

Creating a clone in a different VPC than the original uses the same general steps as in the preceding examples. Because the VPC ID is a property of the subnets, you don't actually specify the VPC ID as a parameter when running any of the RDS CLI commands. The main difference is that you are more likely to need to create new subnets, new subnets mapped to specific AZs, a VPC security group, and a new DB subnet group. That's especially true if this is the first Aurora cluster that you create in that VPC.

You can consult this checklist to verify that all the requirements are in place to perform this type of cloning operation.

- Record the three AZs that are associated with the original cluster. For instructions, see Step 1: Check the Availability Zones of the original cluster.
- Record the three or two AZs that are associated with the subnets in the DB subnet group for the original cluster. For instructions, see Step 2: Check the DB subnet group of the original cluster.
- Create subnets that map to all three of the AZs that are associated with the original cluster. For instructions, see Step 1: Create the subnets for the clone.
- Do any other networking setup, such as setting up a VPC security group, for client systems, application servers, and so on to be able to communicate with the DB instances in the clone. For instructions, see Controlling access with security groups.
- Create a new DB subnet group containing three or two of the subnets that are associated with the AZs from the first point. For instructions, see Step 2: Create the DB subnet group for the clone.

When all the prerequisites are in place, you can pause database activity on the original cluster while you create the clone and switch your application to use it. After the clone is created and you verify that you can connect to it, run your application code, and so on, you can consider whether to keep both the original and clones running, or discontinue use of the original cluster.

The following Linux examples show the sequence of Amazon CLI operations to clone an Aurora DB cluster from one VPC to another. Some fields that aren't relevant to the examples aren't shown in the command output.

First, we check the IDs of the source and destination VPCs. The descriptive name that you assign to a VPC when you create it is represented as a tag in the VPC metadata.

```
$ aws ec2 describe-vpcs --query '*[].[VpcId,Tags]'
[
    [
        'vpc-0f0c0fc0000b0ffb0',
        [
            {
                'Key': 'Name',
                'Value': 'clone-vpc-source'
            }
        ]
    ],
    [
        'vpc-9e99d9f99a999bd99',
        [
            {
                'Key': 'Name',
                'Value': 'clone-vpc-dest'
            }
        ]
    ]
]
```

The original cluster already exists in the source VPC. To set up the clone using the same set of AZs for the Aurora storage, we check the AZs used by the original cluster.

```
$ aws rds describe-db-clusters --db-cluster-identifier original-cluster \
  --query 'sort_by(*[].AvailabilityZones[].{Zone:@},&Zone)' --output text

us-east-1c
us-east-1d
```

```
us-east-1f
```

We make sure there are subnets that correspond to the AZs used by the original cluster: `us-east-1c`, `us-east-1d`, and `us-east-1f`.

```
$ aws ec2 create-subnet --vpc-id vpc-9e99d9f99a999bd99 \
  --availability-zone us-east-1c --cidr-block 10.0.0.128/28
{
    'Subnet': {
        'AvailabilityZone': 'us-east-1c',
        'SubnetId': 'subnet-3333a33be3ef3e333',
        'VpcId': 'vpc-9e99d9f99a999bd99',
    }
}

$ aws ec2 create-subnet --vpc-id vpc-9e99d9f99a999bd99 \
--availability-zone us-east-1d --cidr-block 10.0.0.160/28
{
    'Subnet': {
        'AvailabilityZone': 'us-east-1d',
        'SubnetId': 'subnet-4eeb444cd44b4d444',
        'VpcId': 'vpc-9e99d9f99a999bd99',
    }
}

$ aws ec2 create-subnet --vpc-id vpc-9e99d9f99a999bd99 \
--availability-zone us-east-1f --cidr-block 10.0.0.224/28
{
    'Subnet': {
        'AvailabilityZone': 'us-east-1f',
        'SubnetId': 'subnet-66eea6666fb66d66c',
        'VpcId': 'vpc-9e99d9f99a999bd99',
    }
}
```

This example confirms that there are subnets that map to the necessary AZs in the destination VPC.

```
aws ec2 describe-subnets --query 'sort_by(*[] | [?VpcId == `vpc-9e99d9f99a999bd99`] |
[].{SubnetId:SubnetId,VpcId:VpcId,AvailabilityZone:AvailabilityZone},
 &AvailabilityZone)' --output table

-------------------------------------------------------------------------
|                            DescribeSubnets                            |
```

```
+------------------+---------------------------+-------------------------+
| AvailabilityZone |         SubnetId          |          VpcId          |
+------------------+---------------------------+-------------------------+
|  us-east-1a      |  subnet-000ff0e00000c0aea  |  vpc-9e99d9f99a999bd99  |
|  us-east-1b      |  subnet-1111d111111ca11b1  |  vpc-9e99d9f99a999bd99  |
|  us-east-1c      | subnet-3333a33be3ef3e333   |  vpc-9e99d9f99a999bd99  |
|  us-east-1d      | subnet-4eeb444cd44b4d444   |  vpc-9e99d9f99a999bd99  |
|  us-east-1f      | subnet-66eea6666fb66d66c   |  vpc-9e99d9f99a999bd99  |
+------------------+---------------------------+-------------------------+
```

Before creating an Aurora DB cluster in the VPC, you must have a DB subnet group with subnets that map to the AZs used for Aurora storage. When you create a regular cluster, you can use any set of three AZs. When you clone an existing cluster, the subnet group must match at least two of the three AZs that it uses for Aurora storage.

```
$ aws rds create-db-subnet-group \
  --db-subnet-group-name subnet-group-in-other-vpc \
  --subnet-ids
 '["subnet-3333a33be3ef3e333","subnet-4eeb444cd44b4d444","subnet-66eea6666fb66d66c"]' \
  --db-subnet-group-description 'DB subnet group with 3 subnets:
 subnet-3333a33be3ef3e333,subnet-4eeb444cd44b4d444,subnet-66eea6666fb66d66c'

{
    'DBSubnetGroup': {
        'DBSubnetGroupName': 'subnet-group-in-other-vpc',
        'DBSubnetGroupDescription': 'DB subnet group with 3 subnets:
 subnet-3333a33be3ef3e333,subnet-4eeb444cd44b4d444,subnet-66eea6666fb66d66c',
        'VpcId': 'vpc-9e99d9f99a999bd99',
        'SubnetGroupStatus': 'Complete',
        'Subnets': [
            {
                'SubnetIdentifier': 'subnet-4eeb444cd44b4d444',
                'SubnetAvailabilityZone': { 'Name': 'us-east-1d' }
            },
            {
                'SubnetIdentifier': 'subnet-3333a33be3ef3e333',
                'SubnetAvailabilityZone': { 'Name': 'us-east-1c' }
            },
            {
                'SubnetIdentifier': 'subnet-66eea6666fb66d66c',
                'SubnetAvailabilityZone': { 'Name': 'us-east-1f' }
            }
        ]
```

```
    }
}
```

Now the subnets and DB subnet group are in place. The following example shows the `restore-db-cluster-to-point-in-time` that clones the cluster. The `--db-subnet-group-name` option associates the clone with the correct set of subnets that map to the correct set of AZs from the original cluster.

```
$ aws rds restore-db-cluster-to-point-in-time \
  --source-db-cluster-identifier original-cluster \
  --db-cluster-identifier clone-in-other-vpc \
  --restore-type copy-on-write --use-latest-restorable-time \
  --db-subnet-group-name subnet-group-in-other-vpc

{
  'DBClusterIdentifier': 'clone-in-other-vpc',
  'DBSubnetGroup': 'subnet-group-in-other-vpc',
  'Engine': 'aurora-postgresql',
  'EngineVersion': '15.4',
  'Status': 'creating',
  'Endpoint': 'clone-in-other-vpc.cluster-c0abcdef.us-east-1.rds.amazonaws.com'
}
```

The following example confirms that the Aurora storage in the clone uses the same set of AZs as in the original cluster.

```
$ aws rds describe-db-clusters --db-cluster-identifier clone-in-other-vpc \
  --query 'sort_by(*[].AvailabilityZones[].{Zone:@},&Zone)' --output text

us-east-1c
us-east-1d
us-east-1f
```

At this point, you can create DB instances for the clone. Make sure that the VPC security group associated with each instance allows connections from the IP address ranges you use for the EC2 instances, application servers, and so on that are in the destination VPC.

Cross-account cloning with Amazon RAM and Amazon Aurora

By using Amazon Resource Access Manager (Amazon RAM) with Amazon Aurora, you can share Aurora DB clusters and clones that belong to your Amazon account with another Amazon account

or organization. Such *cross-account cloning* is much faster than creating and restoring a database snapshot. You can create a clone of one of your Aurora DB clusters and share the clone. Or you can share your Aurora DB cluster with another Amazon account and let the account holder create the clone. The approach that you choose depends on your use case.

For example, you might need to regularly share a clone of your financial database with your organization's internal auditing team. In this case, your auditing team has its own Amazon account for the applications that it uses. You can give the auditing team's Amazon account the permission to access your Aurora DB cluster and clone it as needed.

On the other hand, if an outside vendor audits your financial data you might prefer to create the clone yourself. You then give the outside vendor access to the clone only.

You can also use cross-account cloning to support many of the same use cases for cloning within the same Amazon account, such as development and testing. For example, your organization might use different Amazon accounts for production, development, testing, and so on. For more information, see Overview of Aurora cloning.

Thus, you might want to share a clone with another Amazon account or allow another Amazon account to create clones of your Aurora DB clusters. In either case, start by using Amazon RAM to create a share object. For complete information about sharing Amazon resources between Amazon accounts, see the Amazon RAM User Guide.

Creating a cross-account clone requires actions from the Amazon account that owns the original cluster, and the Amazon account that creates the clone. First, the original cluster owner modifies the cluster to allow one or more other accounts to clone it. If any of the accounts is in a different Amazon organization, Amazon generates a sharing invitation. The other account must accept the invitation before proceeding. Then each authorized account can clone the cluster. Throughout this process, the cluster is identified by its unique Amazon Resource Name (ARN).

As with cloning within the same Amazon account, additional storage space is used only if changes are made to the data by the source or the clone. Charges for storage are then applied at that time. If the source cluster is deleted, storage costs are distributed equally among remaining cloned clusters.

Topics

- Limitations of cross-account cloning
- Allowing other Amazon accounts to clone your cluster
- Cloning a cluster that is owned by another Amazon account

Limitations of cross-account cloning

Aurora cross-account cloning has the following limitations:

- You can't view or accept invitations to shared resources with the Amazon Web Services Management Console. Use the Amazon CLI, the Amazon RDS API, or the Amazon RAM console to view and accept invitations to shared resources.
- You can create only one new clone from a resource shared with your Amazon Web Services account. This applies whether the shared resource is an original Aurora DB cluster or a previously created clone.
- You can create only one new clone from a clone that's been shared with your Amazon account.
- You can't share resources (clones or Aurora DB clusters) that have been shared with your Amazon account.
- You can create a maximum of 15 cross-account clones from any single Aurora DB cluster.
- Each of the 15 cross-account clones must be owned by a different Amazon account. That is, you can only create one cross-account clone of a cluster within any Amazon account.
- After you clone a cluster, the original cluster and its clone are considered to be the same for purposes of enforcing limits on cross-account clones. You can't create cross-account clones of both the original cluster and the cloned cluster within the same Amazon account. The total number of cross-account clones for the original cluster and any of its clones can't exceed 15.
- You can't share an Aurora DB cluster with other Amazon accounts unless the cluster is in an `ACTIVE` state.
- You can't rename an Aurora DB cluster that's been shared with other Amazon accounts.
- You can't create a cross-account clone of a cluster that is encrypted with the default RDS key.
- You can't create nonencrypted clones in one Amazon account from encrypted Aurora DB clusters that have been shared by another Amazon account. The cluster owner must grant permission to access the source cluster's Amazon KMS key. However, you can use a different key when you create the clone.

Allowing other Amazon accounts to clone your cluster

To allow other Amazon accounts to clone a cluster that you own, use Amazon RAM to set the sharing permission. Doing so also sends an invitation to each of the other accounts that's in a different Amazon organization.

For the procedures to share resources owned by you in the Amazon RAM console, see Sharing resources owned by you in the *Amazon RAM User Guide*.

Topics

- Granting permission to other Amazon accounts to clone your cluster
- Checking if a cluster that you own is shared with other Amazon accounts

Granting permission to other Amazon accounts to clone your cluster

If the cluster that you're sharing is encrypted, you also share the Amazon KMS key for the cluster. You can allow Amazon Identity and Access Management (IAM) users or roles in one Amazon account to use a KMS key in a different account.

To do this, you first add the external account (root user) to the KMS key's key policy through Amazon KMS. You don't add the individual users or roles to the key policy, only the external account that owns them. You can only share a KMS key that you create, not the default RDS service key. For information about access control for KMS keys, see Authentication and access control for Amazon KMS.

Console

To grant permission to clone your cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the DB cluster that you want to share to see its **Details** page, and choose the **Connectivity & security** tab.
4. In the **Share DB cluster with other Amazon accounts** section, enter the numeric account ID for the Amazon account that you want to allow to clone this cluster. For account IDs in the same organization, you can begin typing in the box and then choose from the menu.

> **Important**
>
> In some cases, you might want an account that is not in the same Amazon organization as your account to clone a cluster. In these cases, for security reasons the console doesn't report who owns that account ID or whether the account exists.

> Be careful entering account numbers that are not in the same Amazon organization as your Amazon account. Immediately verify that you shared with the intended account.

5. On the confirmation page, verify that the account ID that you specified is correct. Enter `share` in the confirmation box to confirm.

   On the **Details** page, an entry appears that shows the specified Amazon account ID under **Accounts that this DB cluster is shared with**. The **Status** column initially shows a status of **Pending**.

6. Contact the owner of the other Amazon account, or sign in to that account if you own both of them. Instruct the owner of the other account to accept the sharing invitation and clone the DB cluster, as described following.

Amazon CLI

To grant permission to clone your cluster

1. Gather the information for the required parameters. You need the ARN for your cluster and the numeric ID for the other Amazon account.
2. Run the Amazon RAM CLI command `create-resource-share`.

   For Linux, macOS, or Unix:

```
aws ram create-resource-share --name descriptive_name \
  --region region \
  --resource-arns cluster_arn \
  --principals other_account_ids
```

   For Windows:

```
aws ram create-resource-share --name descriptive_name ^
  --region region ^
  --resource-arns cluster_arn ^
  --principals other_account_ids
```

   To include multiple account IDs for the `--principals` parameter, separate IDs from each other with spaces. To specify whether the permitted account IDs can be outside your Amazon

organization, include the `--allow-external-principals` or `--no-allow-external-principals` parameter for `create-resource-share`.

Amazon RAM API

To grant permission to clone your cluster

1. Gather the information for the required parameters. You need the ARN for your cluster and the numeric ID for the other Amazon account.
2. Call the Amazon RAM API operation CreateResourceShare, and specify the following values:
   - Specify the account ID for one or more Amazon accounts as the `principals` parameter.
   - Specify the ARN for one or more Aurora DB clusters as the `resourceArns` parameter.
   - Specify whether the permitted account IDs can be outside your Amazon organization by including a Boolean value for the `allowExternalPrincipals` parameter.

Recreating a cluster that uses the default RDS key

If the encrypted cluster that you plan to share uses the default RDS key, make sure to recreate the cluster. To do this, create a manual snapshot of your DB cluster, use an Amazon KMS key, and then restore the cluster to a new cluster. Then share the new cluster. To perform this process, take the following steps.

To recreate an encrypted cluster that uses the default RDS key

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Snapshots** from the navigation pane.
3. Choose your snapshot.
4. For **Actions**, choose **Copy Snapshot**, and then choose **Enable encryption**.
5. For **Amazon KMS key**, choose the new encryption key that you want to use.
6. Restore the copied snapshot. To do so, follow the procedure in Restoring from a DB cluster snapshot. The new DB instance uses your new encryption key.
7. (Optional) Delete the old DB cluster if you no longer need it. To do so, follow the procedure in Deleting a DB cluster snapshot. Before you do, confirm that your new cluster has all necessary data and that your application can access it successfully.

Checking if a cluster that you own is shared with other Amazon accounts

You can check if other users have permission to share a cluster. Doing so can help you understand whether the cluster is approaching the limit for the maximum number of cross-account clones.

For the procedures to share resources using the Amazon RAM console, see Sharing resources owned by you in the *Amazon RAM User Guide*.

Amazon CLI

To find out if a cluster that you own is shared with other Amazon accounts

- Call the Amazon RAM CLI command `list-principals`, using your account ID as the resource owner and the ARN of your cluster as the resource ARN. You can see all shares with the following command. The results indicate which Amazon accounts are allowed to clone the cluster.

```
aws ram list-principals \
    --resource-arns your_cluster_arn \
    --principals your_aws_id
```

Amazon RAM API

To find out if a cluster that you own is shared with other Amazon accounts

- Call the Amazon RAM API operation ListPrincipals. Use your account ID as the resource owner and the ARN of your cluster as the resource ARN.

Cloning a cluster that is owned by another Amazon account

To clone a cluster that's owned by another Amazon account, use Amazon RAM to get permission to make the clone. After you have the required permission, use the standard procedure for cloning an Aurora cluster.

You can also check whether a cluster that you own is a clone of a cluster owned by a different Amazon account.

For the procedures to work with resources owned by others in the Amazon RAM console, see Accessing resources shared with you in the *Amazon RAM User Guide.*

Topics

- Viewing invitations to clone clusters that are owned by other Amazon accounts
- Accepting invitations to share clusters owned by other Amazon accounts
- Cloning an Aurora cluster that is owned by another Amazon account
- Checking if a DB cluster is a cross-account clone

Viewing invitations to clone clusters that are owned by other Amazon accounts

To work with invitations to clone clusters owned by Amazon accounts in other Amazon organizations, use the Amazon CLI, the Amazon RAM console, or the Amazon RAM API. Currently, you can't perform this procedure using the Amazon RDS console.

For the procedures to work with invitations in the Amazon RAM console, see Accessing resources shared with you in the *Amazon RAM User Guide*.

Amazon CLI

To see invitations to clone clusters that are owned by other Amazon accounts

1. Run the Amazon RAM CLI command `get-resource-share-invitations`.

   ```
   aws ram get-resource-share-invitations --region region_name
   ```

   The results from the preceding command show all invitations to clone clusters, including any that you already accepted or rejected.
2. (Optional) Filter the list so you see only the invitations that require action from you. To do so, add the parameter `--query 'resourceShareInvitations[?status==`PENDING`]'`.

Amazon RAM API

To see invitations to clone clusters that are owned by other Amazon accounts

1. Call the Amazon RAM API operation `GetResourceShareInvitations`. This operation returns all such invitations, including any that you already accepted or rejected.
2. (Optional) Find only the invitations that require action from you by checking the `resourceShareAssociations` return field for a `status` value of `PENDING`.

Accepting invitations to share clusters owned by other Amazon accounts

You can accept invitations to share clusters owned by other Amazon accounts that are in different Amazon organizations. To work with these invitations, use the Amazon CLI, the Amazon RAM and RDS APIs, or the Amazon RAM console. Currently, you can't perform this procedure using the RDS console.

For the procedures to work with invitations in the Amazon RAM console, see Accessing resources shared with you in the *Amazon RAM User Guide*.

Amazon CLI

To accept an invitation to share a cluster from another Amazon account

1. Find the invitation ARN by running the Amazon RAM CLI command `get-resource-share-invitations`, as shown preceding.
2. Accept the invitation by calling the Amazon RAM CLI command `accept-resource-share-invitation`, as shown following.

   For Linux, macOS, or Unix:

   ```
   aws ram accept-resource-share-invitation \
     --resource-share-invitation-arn invitation_arn \
     --region region
   ```

   For Windows:

   ```
   aws ram accept-resource-share-invitation ^
     --resource-share-invitation-arn invitation_arn ^
     --region region
   ```

Amazon RAM and RDS API

To accept invitations to share somebody's cluster

1. Find the invitation ARN by calling the Amazon RAM API operation `GetResourceShareInvitations`, as shown preceding.
2. Pass that ARN as the `resourceShareInvitationArn` parameter to the RDS API operation AcceptResourceShareInvitation.

Cloning an Aurora cluster that is owned by another Amazon account

After you accept the invitation from the Amazon account that owns the DB cluster, as shown preceding, you can clone the cluster.

Console

To clone an Aurora cluster that is owned by another Amazon account

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.

   At the top of the database list, you should see one or more items with a **Role** value of `Shared from account #account_id`. For security reasons, you can only see limited information about the original clusters. The properties that you can see are the ones such as database engine and version that must be the same in your cloned cluster.
3. Choose the cluster that you intend to clone.
4. For **Actions**, choose **Create clone**.
5. Follow the procedure in Console to finish setting up the cloned cluster.
6. As needed, enable encryption for the cloned cluster. If the cluster that you are cloning is encrypted, you must enable encryption for the cloned cluster. The Amazon account that shared the cluster with you must also share the KMS key that was used to encrypt the cluster. You can use the same KMS key to encrypt the clone, or your own KMS key. You can't create a cross-account clone for a cluster that is encrypted with the default KMS key.

   The account that owns the encryption key must grant permission to use the key to the destination account by using a key policy. This process is similar to how encrypted snapshots are shared, by using a key policy that grants permission to the destination account to use the key.

Amazon CLI

To clone an Aurora cluster owned by another Amazon account

1. Accept the invitation from the Amazon account that owns the DB cluster, as shown preceding.

2. Clone the cluster by specifying the full ARN of the source cluster in the `source-db-cluster-identifier` parameter of the RDS CLI command `restore-db-cluster-to-point-in-time`, as shown following.

   If the ARN passed as the `source-db-cluster-identifier` hasn't been shared, the same error is returned as if the specified cluster doesn't exist.

   For Linux, macOS, or Unix:

```
aws rds restore-db-cluster-to-point-in-time \
  --source-db-cluster-identifier=arn:aws-cn:rds:arn_details \
  --db-cluster-identifier=new_cluster_id \
  --restore-type=copy-on-write \
  --use-latest-restorable-time
```

   For Windows:

```
aws rds restore-db-cluster-to-point-in-time ^
  --source-db-cluster-identifier=arn:aws-cn:rds:arn_details ^
  --db-cluster-identifier=new_cluster_id ^
  --restore-type=copy-on-write ^
  --use-latest-restorable-time
```

3. If the cluster that you are cloning is encrypted, encrypt your cloned cluster by including a `kms-key-id` parameter. This `kms-key-id` value can be the same one used to encrypt the original DB cluster, or your own KMS key. Your account must have permission to use that encryption key.

   For Linux, macOS, or Unix:

```
aws rds restore-db-cluster-to-point-in-time \
  --source-db-cluster-identifier=arn:aws-cn:rds:arn_details \
  --db-cluster-identifier=new_cluster_id \
  --restore-type=copy-on-write \
  --use-latest-restorable-time \
  --kms-key-id=arn:aws-cn:kms:arn_details
```

   For Windows:

```
aws rds restore-db-cluster-to-point-in-time ^
```

```
--source-db-cluster-identifier=arn:aws-cn:rds:arn_details ^
--db-cluster-identifier=new_cluster_id ^
--restore-type=copy-on-write ^
--use-latest-restorable-time ^
--kms-key-id=arn:aws-cn:kms:arn_details
```

The account that owns the encryption key must grant permission to use the key to the destination account by using a key policy. This process is similar to how encrypted snapshots are shared, by using a key policy that grants permission to the destination account to use the key. An example of a key policy follows.

JSON

```
{
    "Id": "key-policy-1",
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "Allow use of the key",
            "Effect": "Allow",
            "Principal": {
                "AWS": [
                    "arn:aws-cn:iam::111122223333:user/KeyUser",
                    "arn:aws-cn:iam::111122223333:root"
                ]
            },
            "Action": [
                "kms:CreateGrant",
                "kms:Encrypt",
                "kms:Decrypt",
                "kms:ReEncrypt*",
                "kms:GenerateDataKey*",
                "kms:DescribeKey"
            ],
            "Resource": "*"
        },
        {
            "Sid": "Allow attachment of persistent resources",
            "Effect": "Allow",
            "Principal": {
                "AWS": [
                    "arn:aws-cn:iam::111122223333:user/KeyUser",
```

```
                    "arn:aws-cn:iam::111122223333:root"
                ]
            },
            "Action": [
                "kms:CreateGrant",
                "kms:ListGrants",
                "kms:RevokeGrant"
            ],
            "Resource": "*",
            "Condition": {
                "Bool": {
                    "kms:GrantIsForAWSResource": true
                }
            }
        }
    ]
}
```

Note

The restore-db-cluster-to-point-in-time Amazon CLI command restores only the DB cluster, not the DB instances for that DB cluster. To create DB instances for the restored DB cluster, invoke the create-db-instance command. Specify the identifier of the restored DB cluster in `--db-cluster-identifier`.
You can create DB instances only after the `restore-db-cluster-to-point-in-time` command has completed and the DB cluster is available.

RDS API

To clone an Aurora cluster owned by another Amazon account

1. Accept the invitation from the Amazon account that owns the DB cluster, as shown preceding.
2. Clone the cluster by specifying the full ARN of the source cluster in the `SourceDBClusterIdentifier` parameter of the RDS API operation `RestoreDBClusterToPointInTime`.

   If the ARN passed as the `SourceDBClusterIdentifier` hasn't been shared, then the same error is returned as if the specified cluster doesn't exist.

3. If the cluster that you are cloning is encrypted, include a `KmsKeyId` parameter to encrypt your cloned cluster. This `kms-key-id` value can be the same one used to encrypt the original DB cluster, or your own KMS key. Your account must have permission to use that encryption key.

   When you clone a volume, the destination account must have permission to use the encryption key used to encrypt the source cluster. Aurora encrypts the new cloned cluster with the encryption key specified in `KmsKeyId`.

   The account that owns the encryption key must grant permission to use the key to the destination account by using a key policy. This process is similar to how encrypted snapshots are shared, by using a key policy that grants permission to the destination account to use the key. An example of a key policy follows.

   JSON

```
{
    "Id": "key-policy-1",
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "Allow use of the key",
            "Effect": "Allow",
            "Principal": {
                "AWS": [
                    "arn:aws-cn:iam::111122223333:user/KeyUser",
                    "arn:aws-cn:iam::111122223333:root"
                ]
            },
            "Action": [
                "kms:CreateGrant",
                "kms:Encrypt",
                "kms:Decrypt",
                "kms:ReEncrypt*",
                "kms:GenerateDataKey*",
                "kms:DescribeKey"
            ],
            "Resource": "*"
        },
        {
            "Sid": "Allow attachment of persistent resources",
            "Effect": "Allow",
```

```
            "Principal": {
                "AWS": [
                    "arn:aws-cn:iam::111122223333:user/KeyUser",
                    "arn:aws-cn:iam::111122223333:root"
                ]
            },
            "Action": [
                "kms:CreateGrant",
                "kms:ListGrants",
                "kms:RevokeGrant"
            ],
            "Resource": "*",
            "Condition": {
                "Bool": {
                    "kms:GrantIsForAWSResource": true
                }
            }
        }
    ]
}
```

Note

The RestoreDBClusterToPointInTime RDS API operation restores only the DB cluster, not the DB instances for that DB cluster. To create DB instances for the restored DB cluster, invoke the CreateDBInstance RDS API operation. Specify the identifier of the restored DB cluster in `DBClusterIdentifier`. You can create DB instances only after the `RestoreDBClusterToPointInTime` operation has completed and the DB cluster is available.

Checking if a DB cluster is a cross-account clone

The `DBClusters` object identifies whether each cluster is a cross-account clone. You can see the clusters that you have permission to clone by using the `include-shared` option when you run the RDS CLI command `describe-db-clusters`. However, you can't see most of the configuration details for such clusters.

Amazon CLI

To check if a DB cluster is a cross-account clone

- Call the RDS CLI command `describe-db-clusters`.

  The following example shows how actual or potential cross-account clone DB clusters appear in `describe-db-clusters` output. For existing clusters owned by your Amazon account, the `CrossAccountClone` field indicates whether the cluster is a clone of a DB cluster that is owned by another Amazon account.

  In some cases, an entry might have a different Amazon account number than yours in the `DBClusterArn` field. In this case, that entry represents a cluster that is owned by a different Amazon account and that you can clone. Such entries have few fields other than `DBClusterArn`. When creating the cloned cluster, specify the same `StorageEncrypted`, `Engine`, and `EngineVersion` values as in the original cluster.

```
$aws rds describe-db-clusters --include-shared --region us-east-1
{
  "DBClusters": [
      {
          "EarliestRestorableTime": "2023-02-01T21:17:54.106Z",
          "Engine": "aurora-mysql",
          "EngineVersion": "8.0.mysql_aurora.3.02.0",
          "CrossAccountClone": false,
...
      },
      {
          "EarliestRestorableTime": "2023-02-09T16:01:07.398Z",
          "Engine": "aurora-mysql",
          "EngineVersion": "8.0.mysql_aurora.3.02.0",
          "CrossAccountClone": true,
...
      },
      {
          "StorageEncrypted": false,
          "DBClusterArn": "arn:aws-cn:rds:us-east-1:12345678:cluster:cluster-
abcdefgh",
          "Engine": "aurora-mysql",
          "EngineVersion": "8.0.mysql_aurora.3.02.0
  ]
```

```
}
```

RDS API

To check if a DB cluster is a cross-account clone

- Call the RDS API operation DescribeDBClusters.

  For existing clusters owned by your Amazon account, the `CrossAccountClone` field indicates whether the cluster is a clone of a DB cluster owned by another Amazon account. Entries with a different Amazon account number in the `DBClusterArn` field represent clusters that you can clone and that are owned by other Amazon accounts. These entries have few fields other than `DBClusterArn`. When creating the cloned cluster, specify the same `StorageEncrypted`, `Engine`, and `EngineVersion` values as in the original cluster.

  The following example shows a return value that demonstrates both actual and potential cloned clusters.

```
{
  "DBClusters": [
      {
          "EarliestRestorableTime": "2023-02-01T21:17:54.106Z",
          "Engine": "aurora-mysql",
          "EngineVersion": "8.0.mysql_aurora.3.02.0",
          "CrossAccountClone": false,
...
      },
      {
          "EarliestRestorableTime": "2023-02-09T16:01:07.398Z",
          "Engine": "aurora-mysql",
          "EngineVersion": "8.0.mysql_aurora.3.02.0",
          "CrossAccountClone": true,
...
      },
      {
          "StorageEncrypted": false,
          "DBClusterArn": "arn:aws-cn:rds:us-east-1:12345678:cluster:cluster-
abcdefgh",
          "Engine": "aurora-mysql",
          "EngineVersion": "8.0.mysql_aurora.3.02.0"
      }
```

```
    ]
}
```

Integrating Aurora with other Amazon services

Integrate Amazon Aurora with other Amazon services so that you can extend your Aurora DB cluster to use additional capabilities in the Amazon Cloud.

Topics

- Integrating Amazon services with Amazon Aurora MySQL
- Integrating Amazon services with Amazon Aurora PostgreSQL

Integrating Amazon services with Amazon Aurora MySQL

Amazon Aurora MySQL integrates with other Amazon services so that you can extend your Aurora MySQL DB cluster to use additional capabilities in the Amazon Cloud. Your Aurora MySQL DB cluster can use Amazon services to do the following:

- Synchronously or asynchronously invoke an Amazon Lambda function using the native functions `lambda_sync` or `lambda_async`. Or, asynchronously invoke an Amazon Lambda function using the `mysql.lambda_async` procedure.
- Load data from text or XML files stored in an Amazon S3 bucket into your DB cluster using the `LOAD DATA FROM S3` or `LOAD XML FROM S3` command.
- Save data to text files stored in an Amazon S3 bucket from your DB cluster using the `SELECT INTO OUTFILE S3` command.
- Automatically add or remove Aurora Replicas with Application Auto Scaling. For more information, see Amazon Aurora Auto Scaling with Aurora Replicas.

For more information about integrating Aurora MySQL with other Amazon services, see Integrating Amazon Aurora MySQL with other Amazon services.

Integrating Amazon services with Amazon Aurora PostgreSQL

Amazon Aurora PostgreSQL integrates with other Amazon services so that you can extend your Aurora PostgreSQL DB cluster to use additional capabilities in the Amazon Cloud. Your Aurora PostgreSQL DB cluster can use Amazon services to do the following:

- Quickly collect, view, and assess performance on your relational database workloads with Performance Insights.

- Automatically add or remove Aurora Replicas with Aurora Auto Scaling. For more information, see Amazon Aurora Auto Scaling with Aurora Replicas.

For more information about integrating Aurora PostgreSQL with other Amazon services, see Integrating Amazon Aurora PostgreSQL with other Amazon services.

Maintaining an Amazon Aurora DB cluster

Periodically, Amazon RDS performs maintenance on Amazon RDS resources. The following topics describe these maintenance actions and how to apply them.

Overview of DB cluster maintenance updates

Maintenance most often involves updates to the following resources in your DB cluster:

- Underlying hardware
- Underlying operating system (OS)
- Database engine version

Updates to the operating system most often occur for security issues. We recommend that you do them as soon as possible. For more information about operating system updates, see the section called “Operating system updates”.

Topics

- Offline resources during maintenance updates
- Deferred DB instanceand DB cluster modifications
- Eventual consistency for the DescribePendingMaintenanceActions API

Offline resources during maintenance updates

Some maintenance items require that Amazon RDS take your DB cluster offline for a short time. Maintenance items that require a resource to be offline include required operating system or database patching. Required patching is automatically scheduled only for patches that are related to security and instance reliability. Such patching occurs infrequently, typically once every few months. It seldom requires more than a fraction of your maintenance window.

Deferred DB instanceand DB cluster modifications

Deferred DB cluster and instance modifications that you have chosen not to apply immediately are applied during the maintenance window. For example, you might choose to change DB instance classes or cluster or DB parameter groups during the maintenance window. Such modifications that you specify using the **pending reboot** setting don't show up in the **Pending maintenance** list. For information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

To see the modifications that are pending for the next maintenance window, use the describe-db-clusters Amazon CLI command and check the `PendingModifiedValues` field.

Eventual consistency for the DescribePendingMaintenanceActions API

The Amazon RDS `DescribePendingMaintenanceActions` API follows an eventual consistency model. This means that the result of the `DescribePendingMaintenanceActions` command might not be immediately visible to all subsequent RDS commands. Keep this in mind when you use `DescribePendingMaintenanceActions` immediately after using a previous API command.


Eventual consistency can affect the way you managed your maintenance updates. For example, if you run the `ApplyPendingMaintenanceActions` command to update the database engine version for a DB cluster, it will eventually be visible to `DescribePendingMaintenanceActions`. In this scenario, `DescribePendingMaintenanceActions` might show that the maintenance action wasn't applied even though it was.

To manage eventual consistency, you can do the following:

- Confirm the state of your DB cluster before you run a command to modify it. Run the appropriate `DescribePendingMaintenanceActions` command using an exponential backoff algorithm to ensure that you allow enough time for the previous command to propagate through the system. To do this, run the `DescribePendingMaintenanceActions` command repeatedly, starting with a couple of seconds of wait time, and increasing gradually up to five minutes of wait time.
- Add wait time between subsequent commands, even if a `DescribePendingMaintenanceActions` command returns an accurate response. Apply an exponential backoff algorithm starting with a couple of seconds of wait time, and increase gradually up to about five minutes of wait time.

Viewing pending maintenance updates

View whether a maintenance update is available for your DB cluster by using the RDS console, the Amazon CLI, or the RDS API. If an update is available, it is indicated in the **Maintenance** column for the DB cluster on the Amazon RDS console, as shown in this figure.

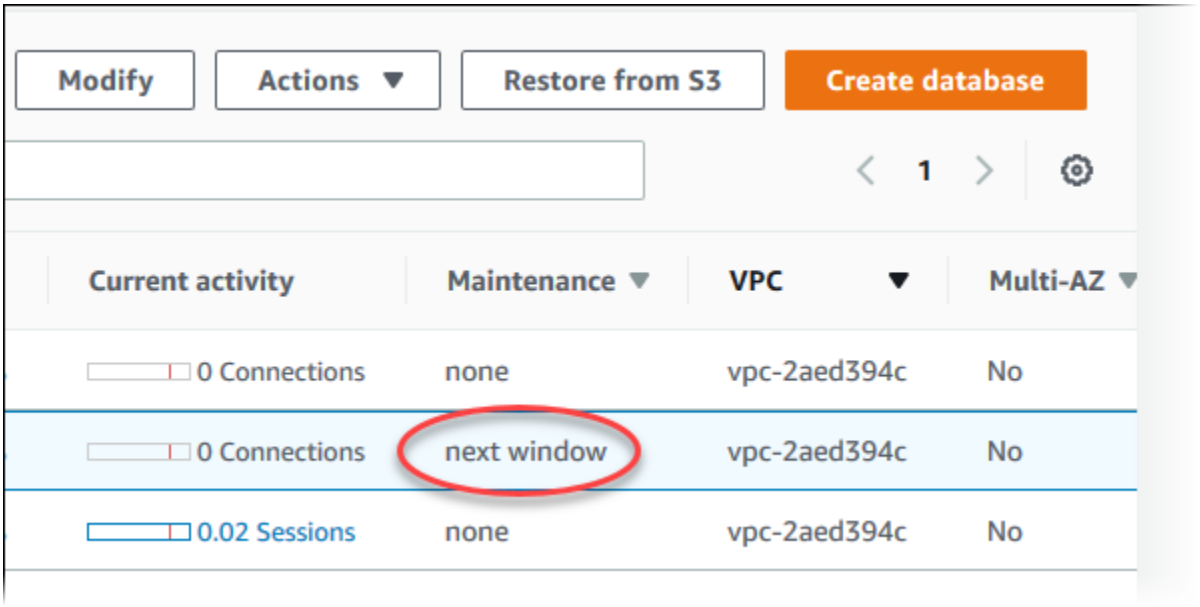

If no maintenance update is available for a DB cluster, the column value is **none** for it.

If a maintenance update is available for a DB cluster, the following column values are possible:


- **required** – The maintenance action will be applied to the resource and can't be deferred indefinitely.
- **available** – The maintenance action is available, but it will not be applied to the resource automatically. You can apply it manually.
- **next window** – The maintenance action will be applied to the resource during the next maintenance window.
- **In progress** – The maintenance action is being applied to the resource.

If an update is available, you can do one of the following:

- If the maintenance value is **next window**, defer the maintenance actions by choosing **Defer upgrade** from **Actions**. You can't defer a maintenance action that has already started.
- Apply the maintenance actions immediately.
- Apply the maintenance actions during your next maintenance window.
- Take no action.

To take an action by using the Amazon Web Services Management Console

1. Choose the DB instance or cluster to show its details.
2. Choose **Maintenance & backups**. The pending maintenance actions appear.
3. Choose the action to take, then choose when to apply it.

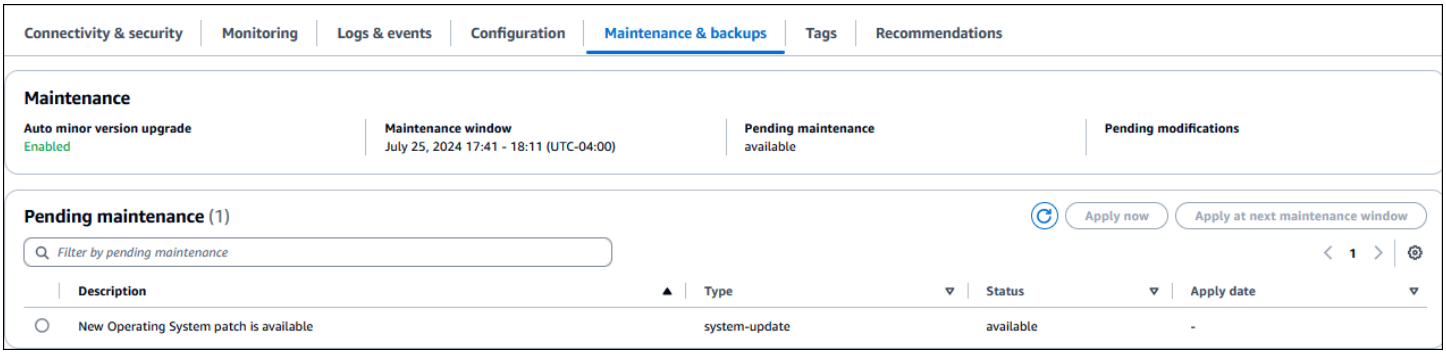

The maintenance window determines when pending operations start, but doesn't limit the total run time of these operations. Maintenance operations aren't guaranteed to finish before the maintenance window ends, and can continue beyond the specified end time. For more information, see Amazon RDS maintenance window.

You can also view whether a maintenance update is available for your DB cluster by running the describe-pending-maintenance-actions Amazon CLI command.

For information about applying maintenance updates, see Applying updates to a DB cluster.

Maintenance actions for Amazon Aurora

The following maintenance actions apply to Aurora DB clusters:

- `os-upgrade` – Update the operating systems of all the DB instances in the DB cluster, using rolling upgrades. For more information, see the section called “Operating system updates”.
- `serverless-platform-version-update` – Update the platform version of all the serverless DB instances in the DB cluster, using rolling upgrades. For more information about platform versions, see Aurora serverless capacity.
- `system-update` – Patch the DB engine for Aurora PostgreSQL.

The following maintenance actions apply to Aurora DB instances:

- `ca-certificate-rotation` – Update the Amazon RDS Certificate Authority certificate for the DB instance.
- `hardware-maintenance` – Perform maintenance on the underlying hardware for the DB instance.
- `system-update` – Update the operating system for the DB instance.

Choosing the frequency of Aurora MySQL maintenance updates

You can control whether Aurora MySQL upgrades happen frequently or rarely for each DB cluster. The best choice depends on your usage of Aurora MySQL and the priorities for your applications that run on Aurora. For information about the Aurora MySQL long-term stability (LTS) releases that require less frequent upgrades, see Aurora MySQL long-term support (LTS) releases.

You might choose to upgrade an Aurora MySQL cluster rarely if some or all of the following conditions apply:

- Your testing cycle for your application takes a long time for each update to the Aurora MySQL database engine.
- You have many DB clusters or many applications all running on the same Aurora MySQL version. You prefer to upgrade all of your DB clusters and associated applications at the same time.
- You use both Aurora MySQL and RDS for MySQL. You prefer to keep the Aurora MySQL clusters and RDS for MySQL DB instances compatible with the same level of MySQL.
- Your Aurora MySQL application is in production or is otherwise business-critical. You can't afford downtime for upgrades outside of rare occurrences for critical patches.
- Your Aurora MySQL application isn't limited by performance issues or feature gaps that are addressed in subsequent Aurora MySQL versions.

If the preceding factors apply to your situation, you can limit the number of forced upgrades for an Aurora MySQL DB cluster. You do so by choosing a specific Aurora MySQL version known as the "Long-Term Support" (LTS) version when you create or upgrade that DB cluster. Doing so minimizes the number of upgrade cycles, testing cycles, and upgrade-related outages for that DB cluster.

You might choose to upgrade an Aurora MySQL cluster frequently if some or all of the following conditions apply:

- The testing cycle for your application is straightforward and brief.

- Your application is still in the development stage.
- Your database environment uses a variety of Aurora MySQL versions, or Aurora MySQL and RDS for MySQL versions. Each Aurora MySQL cluster has its own upgrade cycle.
- You are waiting for specific performance or feature improvements before you increase your usage of Aurora MySQL.

If the preceding factors apply to your situation, you can enable Aurora to apply important upgrades more frequently. To do so, upgrade an Aurora MySQL DB cluster to a more recent Aurora MySQL version than the LTS version. Doing so makes the latest performance enhancements, bug fixes, and features available to you more quickly.

Amazon RDS maintenance window

The *maintenance window* is a weekly time interval during which any system changes are applied. Every DB cluster has a weekly maintenance window. The maintenance window is an opportunity to control when modifications and software patching occur. For more information about adjusting the maintenance window, see Adjusting the preferred DB cluster maintenance window.

RDS consumes some of the resources on your DB cluster while maintenance is being applied. You might observe a minimal effect on performance. For a DB instance, on rare occasions, a Multi-AZ failover might be required for a maintenance update to complete.

If a maintenance event is scheduled for a given week, it's initiated during the 30-minute maintenance window you identify. Most maintenance events also complete during the 30-minute maintenance window, although larger maintenance events may take more than 30 minutes to complete. The maintenance window is paused when the DB cluster is stopped.

The 30-minute maintenance window is selected at random from an 8-hour block of time per region. If you don't specify a maintenance window when you create the DB cluster, RDS assigns a 30-minute maintenance window on a randomly selected day of the week.

The following table shows the time blocks for each Amazon Web Services Region from which default maintenance windows are assigned.

Region Name	Region	Time Block
US East (N. Virginia)	us-east-1	03:00–11:00 UTC

Region Name	Region	Time Block
US East (Ohio)	us-east-2	03:00–11:00 UTC
US West (N. California)	us-west-1	06:00–14:00 UTC
US West (Oregon)	us-west-2	06:00–14:00 UTC
Africa (Cape Town)	af-south-1	03:00–11:00 UTC
Asia Pacific (Hong Kong)	ap-east-1	06:00–14:00 UTC
Asia Pacific (Hyderabad)	ap-south-2	06:30–14:30 UTC
Asia Pacific (Jakarta)	ap-southeast-3	08:00–16:00 UTC
Asia Pacific (Malaysia)	ap-southeast-5	09:00–17:00 UTC
Asia Pacific (Melbourne)	ap-southeast-4	11:00–19:00 UTC
Asia Pacific (Mumbai)	ap-south-1	06:00–14:00 UTC
Asia Pacific (New Zealand)	ap-southeast-6	13:00–21:00 UTC
Asia Pacific (Osaka)	ap-northeast-3	22:00–23:59 UTC
Asia Pacific (Seoul)	ap-northeast-2	13:00–21:00 UTC
Asia Pacific (Singapore)	ap-southeast-1	14:00–22:00 UTC
Asia Pacific (Sydney)	ap-southeast-2	12:00–20:00 UTC
Asia Pacific (Taipei)	ap-east-2	9:00–17:00 UTC

Region Name	Region	Time Block
Asia Pacific (Thailand)	ap-southeast-7	8:00–16:00 UTC
Asia Pacific (Tokyo)	ap-northeast-1	13:00–21:00 UTC
Canada (Central)	ca-central-1	03:00–11:00 UTC
Canada West (Calgary)	ca-west-1	18:00–02:00 UTC
China (Beijing)	cn-north-1	06:00–14:00 UTC
China (Ningxia)	cn-northwest-1	06:00–14:00 UTC
Europe (Frankfurt)	eu-central-1	21:00–05:00 UTC
Europe (Ireland)	eu-west-1	22:00–06:00 UTC
Europe (London)	eu-west-2	22:00–06:00 UTC
Europe (Milan)	eu-south-1	02:00–10:00 UTC
Europe (Paris)	eu-west-3	23:59–07:29 UTC
Europe (Spain)	eu-south-2	02:00–10:00 UTC
Europe (Stockholm)	eu-north-1	23:00–07:00 UTC
Europe (Zurich)	eu-central-2	02:00–10:00 UTC
Israel (Tel Aviv)	il-central-1	03:00–11:00 UTC
Mexico (Central)	mx-central-1	19:00–3:00 UTC
Middle East (Bahrain)	me-south-1	06:00–14:00 UTC
Middle East (UAE)	me-central-1	05:00–13:00 UTC
South America (São Paulo)	sa-east-1	00:00–08:00 UTC

Region Name	Region	Time Block
Amazon GovCloud (US-East)	us-gov-east-1	17:00–01:00 UTC
Amazon GovCloud (US-West)	us-gov-west-1	06:00–14:00 UTC

Topics

- Adjusting the preferred DB cluster maintenance window

Adjusting the preferred DB cluster maintenance window

The Aurora DB cluster maintenance window should fall at the time of lowest usage and thus might need modification from time to time. Your DB cluster is unavailable during this time only if the updates that are being applied require an outage. The outage is for the minimum amount of time required to make the necessary updates.

> **Note**
>
> For upgrades to the database engine, Amazon Aurora manages the preferred maintenance window for a DB cluster and not individual instances.

Console

To adjust the preferred DB cluster maintenance window

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the DB cluster for which you want to change the maintenance window.
4. Choose **Modify**.
5. In the **Maintenance** section, update the maintenance window.
6. Choose **Continue**.

On the confirmation page, review your changes.

7. To apply the changes to the maintenance window immediately, choose **Immediately** in the **Schedule of modifications** section.
8. Choose **Modify cluster** to save your changes.

   Alternatively, choose **Back** to edit your changes, or choose **Cancel** to cancel your changes.

Amazon CLI

To adjust the preferred DB cluster maintenance window, use the Amazon CLI `modify-db-cluster` command with the following parameters:

- `--db-cluster-identifier`
- `--preferred-maintenance-window`

Example

The following code example sets the maintenance window to Tuesdays from 4:00–4:30 AM UTC.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
--db-cluster-identifier my-cluster \
--preferred-maintenance-window Tue:04:00-Tue:04:30
```

For Windows:

```
aws rds modify-db-cluster ^
--db-cluster-identifier my-cluster ^
--preferred-maintenance-window Tue:04:00-Tue:04:30
```

RDS API

To adjust the preferred DB cluster maintenance window, use the Amazon RDS `ModifyDBCluster` API operation with the following parameters:

- `DBClusterIdentifier`
- `PreferredMaintenanceWindow`

Applying updates to a DB cluster

With Amazon RDS, you can choose when to apply maintenance operations. You can decide when Amazon RDS applies updates by using the Amazon Web Services Management Console, Amazon CLI, or RDS API.

Console

To manage an update for a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the DB cluster that has a required update.
4. For **Actions**, choose one of the following:

   - **Patch now**
   - **Patch at next window**

   > **Note**
   >
   > If you choose **Patch at next window** and later want to delay the update, you can choose **Defer upgrade**. You can't defer a maintenance action if it has already started. To cancel a maintenance action, modify the DB instance and disable **Auto minor version upgrade**.

Amazon CLI

To apply a pending update to a DB cluster, use the apply-pending-maintenance-action Amazon CLI command.

Example

For Linux, macOS, or Unix:

```
aws rds apply-pending-maintenance-action \
    --resource-identifier arn:aws-cn:rds:us-west-2:001234567890:db:mysql-db \
```

```
    --apply-action system-update \
    --opt-in-type immediate
```

For Windows:

```
aws rds apply-pending-maintenance-action ^
    --resource-identifier arn:aws-cn:rds:us-west-2:001234567890:db:mysql-db ^
    --apply-action system-update ^
    --opt-in-type immediate
```

> **Note**
>
> To defer a maintenance action, specify `undo-opt-in` for `--opt-in-type`. You can't specify `undo-opt-in` for `--opt-in-type` if the maintenance action has already started. To cancel a maintenance action, run the modify-db-instance Amazon CLI command and specify `--no-auto-minor-version-upgrade`.

To return a list of resources that have at least one pending update, use the describe-pending-maintenance-actions Amazon CLI command.

Example

For Linux, macOS, or Unix:

```
aws rds describe-pending-maintenance-actions \
    --resource-identifier arn:aws-cn:rds:us-west-2:001234567890:db:mysql-db
```

For Windows:

```
aws rds describe-pending-maintenance-actions ^
    --resource-identifier arn:aws-cn:rds:us-west-2:001234567890:db:mysql-db
```

You can also return a list of resources for a DB cluster by specifying the `--filters` parameter of the `describe-pending-maintenance-actions` Amazon CLI command. The format for the `--filters` command is `Name=filter-name,Value=resource-id,...`.

The following are the accepted values for the `Name` parameter of a filter:

- `db-instance-id` – Accepts a list of DB instance identifiers or Amazon Resource Names (ARNs). The returned list only includes pending maintenance actions for the DB instances identified by these identifiers or ARNs.
- `db-cluster-id` – Accepts a list of DB cluster identifiers or ARNs for Amazon Aurora. The returned list only includes pending maintenance actions for the DB clusters identified by these identifiers or ARNs.

For example, the following example returns the pending maintenance actions for the `sample-cluster1` and `sample-cluster2` DB clusters.

Example

For Linux, macOS, or Unix:

```
aws rds describe-pending-maintenance-actions \
 --filters Name=db-cluster-id,Values=sample-cluster1,sample-cluster2
```

For Windows:

```
aws rds describe-pending-maintenance-actions ^
 --filters Name=db-cluster-id,Values=sample-cluster1,sample-cluster2
```

RDS API

To apply an update to a DB cluster, call the Amazon RDS API `ApplyPendingMaintenanceAction` operation.

To return a list of resources that have at least one pending update, call the Amazon RDS API `DescribePendingMaintenanceActions` operation.

Automatic minor version upgrades for Aurora DB clusters

The **Auto minor version upgrade** setting specifies whether Aurora automatically applies upgrades to your DB cluster. These upgrades include new minor versions containing additional features and patches containing bug fixes.

Automatic minor version upgrades periodically update your database to recent database engine versions. However, the upgrade might not always include the latest database engine version. If you need to keep your databases on specific versions at particular times, we recommend that you

manually upgrade to the database versions that you need according to your required schedule. In cases of critical security issues or when a version reaches its end-of-support date, Amazon Aurora will apply a minor version upgrade even if you haven't enabled the **Auto minor version upgrade** option. For more information, see the upgrade documentation for your specific database engine.

See Upgrading the minor version or patch level of an Aurora MySQL DB cluster and Performing a minor version upgrade.

> **Note**
>
> Aurora Global Database doesn't support automatic minor version upgrades.

This setting is turned on by default. For each new DB cluster, choose the appropriate value for this setting. This value is based on its importance, expected lifetime, and the amount of verification testing that you do after each upgrade.

For instructions on turning the **Auto minor version upgrade** setting on or off, see the following:

- Enabling automatic minor version upgrades for an Aurora DB cluster
- Enabling automatic minor version upgrades for individual DB instances in an Aurora DB cluster

> **Important**
>
> We strongly recommend that for new and existing DB clusters, you apply this setting to the DB cluster and not to the DB instances in the cluster individually. If any DB instance in your cluster has this setting turned off, the DB cluster isn't automatically upgraded.

The following table shows how the **Auto minor version upgrade** setting works when applied at the cluster and instance levels.

Action	Cluster setting	Instance settings	Cluster upgraded automatically?
You set it to True on the DB cluster.	True	True for all new and existing instances	Yes

Action	Cluster setting	Instance settings	Cluster upgraded automatically?
You set it to False on the DB cluster.	False	False for all new and existing instances	No
It was set previousl y to True on the DB cluster. You set it to False on at least one DB instance.	Changes to False	False for one or more instances	No
It was set previousl y to False on the DB cluster. You set it to True on at least one DB instance, but not all instances.	False	True for one or more instances, but not all instances	No
It was set previousl y to False on the DB cluster. You set it to True on all DB instances.	Changes to True	True for all instances	Yes

Automatic minor version upgrades are communicated in advance through an Amazon RDS DB cluster event with a category of `maintenance` and ID of `RDS-EVENT-0156`. For more information, see Amazon RDS event categories and event messages for Aurora.

Automatic upgrades occur during the maintenance window. If the individual DB instances in the DB cluster have different maintenance windows from the cluster maintenance window, then the cluster maintenance window takes precedence.

For more information about engine updates for Aurora PostgreSQL, see Database engine updates for Amazon Aurora PostgreSQL.

For more information about the **Auto minor version upgrade** setting for Aurora MySQL, see Enabling automatic upgrades between minor Aurora MySQL versions. For general information about engine updates for Aurora MySQL, see Database engine updates for Amazon Aurora MySQL.

Enabling automatic minor version upgrades for an Aurora DB cluster

Follow the general procedure in Modifying the DB cluster by using the console, CLI, and API.

Console

On the **Modify DB cluster** page, in the **Maintenance** section, select the **Enable auto minor version upgrade** check box.

Amazon CLI

Call the modify-db-cluster Amazon CLI command. Specify the name of your DB cluster for the `--db-cluster-identifier` option and `true` for the `--auto-minor-version-upgrade` option. Optionally, specify the `--apply-immediately` option to immediately enable this setting for your DB cluster.

RDS API

Call the ModifyDBCluster API operation and specify the name of your DB cluster for the `DBClusterIdentifier` parameter and `true` for the `AutoMinorVersionUpgrade` parameter. Optionally, set the `ApplyImmediately` parameter to `true` to immediately enable this setting for your DB cluster.

Enabling automatic minor version upgrades for individual DB instances in an Aurora DB cluster

Follow the general procedure in Modifying a DB instance in a DB cluster.

Console

On the **Modify DB instance** page, in the **Maintenance** section, select the **Enable auto minor version upgrade** check box.

Amazon CLI

Call the modify-db-instance Amazon CLI command. Specify the name of your DB instance for the `--db-instance-identifier` option and `true` for the `--auto-minor-version-`

upgrade option. Optionally, specify the `--apply-immediately` option to immediately enable this setting for your DB instance. Run a separate `modify-db-instance` command for each DB instance in the cluster.

RDS API

Call the ModifyDBInstance API operation and specify the name of your DB cluster for the `DBInstanceIdentifier` parameter and `true` for the `AutoMinorVersionUpgrade` parameter. Optionally, set the `ApplyImmediately` parameter to `true` to immediately enable this setting for your DB instance. Call a separate `ModifyDBInstance` operation for each DB instance in the cluster.

You can use a CLI command such as the following to check the status of the `AutoMinorVersionUpgrade` setting for all of the DB instances in your Aurora MySQL clusters.

```
aws rds describe-db-instances \
  --query '*[].
{DBClusterIdentifier:DBClusterIdentifier,DBInstanceIdentifier:DBInstanceIdentifier,AutoMinorVer
```

That command produces output similar to the following:

```
[
  {
      "DBInstanceIdentifier": "db-writer-instance",
      "DBClusterIdentifier": "my-db-cluster-57",
      "AutoMinorVersionUpgrade": true
  },
  {
      "DBInstanceIdentifier": "db-reader-instance1",
      "DBClusterIdentifier": "my-db-cluster-57",
      "AutoMinorVersionUpgrade": false
  },
  {
      "DBInstanceIdentifier": "db-writer-instance2",
      "DBClusterIdentifier": "my-db-cluster-80",
      "AutoMinorVersionUpgrade": true
  },
... output omitted ...
```

In this example, **Enable auto minor version upgrade** is turned off for the DB cluster `my-db-cluster-57`, because it's turned off for one of the DB instances in the cluster.

Operating system updates for Aurora DB clusters

DB instances in Aurora MySQL and Aurora PostgreSQL DB clusters occasionally require operating system updates. Amazon RDS upgrades the operating system to a newer version to improve database performance and customers' overall security posture. Typically, the updates take about 10 minutes. Operating system updates don't change the DB engine version or DB instance class of a DB instance.

There are two types of operating system updates, differentiated by the description for the pending maintenance action:

- **Operating system distribution upgrade** – Used to migrate to the latest supported major version of Amazon Linux. Its description is `New Operating System upgrade is available`.
- **Operating system patch** – Used to apply various security fixes and sometimes to improve database performance. Its description is `New Operating System patch is available`.

Operating system updates can be either optional or mandatory:

- An **optional update** can be applied at any time. While these updates are optional, we recommend that you apply them periodically to keep your RDS fleet up to date. RDS *does not* apply these updates automatically.

  To be notified when a new, optional operating system patch becomes available, you can subscribe to RDS-EVENT-0230 in the security patching event category. For information about subscribing to RDS events, see Subscribing to Amazon RDS event notification.

  > **Note**
  >
  > `RDS-EVENT-0230` doesn't apply to operating system distribution upgrades.

- A **mandatory update** is required, and we send a notification before the mandatory update. The notification might contain a due date. Plan to schedule your update before this due date. After the specified due date, Amazon RDS automatically upgrades the operating system for your DB instance to the latest version during one of your assigned maintenance windows.

  Operating system distribution upgrades are mandatory.

> **Note**
>
> Staying current on all optional and mandatory updates might be required to meet various compliance obligations. We recommend that you apply all updates made available by RDS routinely during your maintenance windows.

For Aurora DB clusters, you can use the **cluster-level** maintenance option to perform operating system (OS) updates. Find the option to perform cluster-level updates in the **Maintenance & backups** tab when you select the name of your DB cluster in the console, or use the `os-upgrade` command in the Amazon CLI. This method preserves read availability with rolling upgrades that automatically apply updates to a few reader DB instances at a time. To prevent multiple failovers and reduce unnecessary downtime, Aurora upgrades the writer DB instance last.

Cluster-level OS updates occur during the maintenance window that you specified for the cluster. This ensures coordinated updates across the entire cluster.

For backward compatibility, Aurora also maintains the **instance-level** maintenance option. However, we recommend that you use cluster-level updates instead. If you must use instance-level updates, update the reader DB instances in a DB cluster first, then update the writer DB instance. If you update reader and writer instances simultaneously, you increase the chance of failover-related downtime. Find the option to perform instance-level updates in the **Maintenance & backups** tab when you select the name of your DB instance in the console, or use the `system-update` command in the Amazon CLI.

Instance-level OS updates occur during the maintenance window that you specified for each respective instance. For example, if a cluster and two reader instances have different maintenance window times, an OS update at the cluster level aligns with the cluster maintenance window.

You can use the Amazon Web Services Management Console or the Amazon CLI to get information about the type of operating system upgrade.


Console


To get update information using the Amazon Web Services Management Console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.


2. In the navigation pane, choose **Databases**, and then select the DB instance.
3. Choose **Maintenance & backups**.
4. In the **Pending maintenance** section, find the operating system update, and check the **Description** value.


The following images show a DB cluster with a writer DB instance that has an operating system patch available.

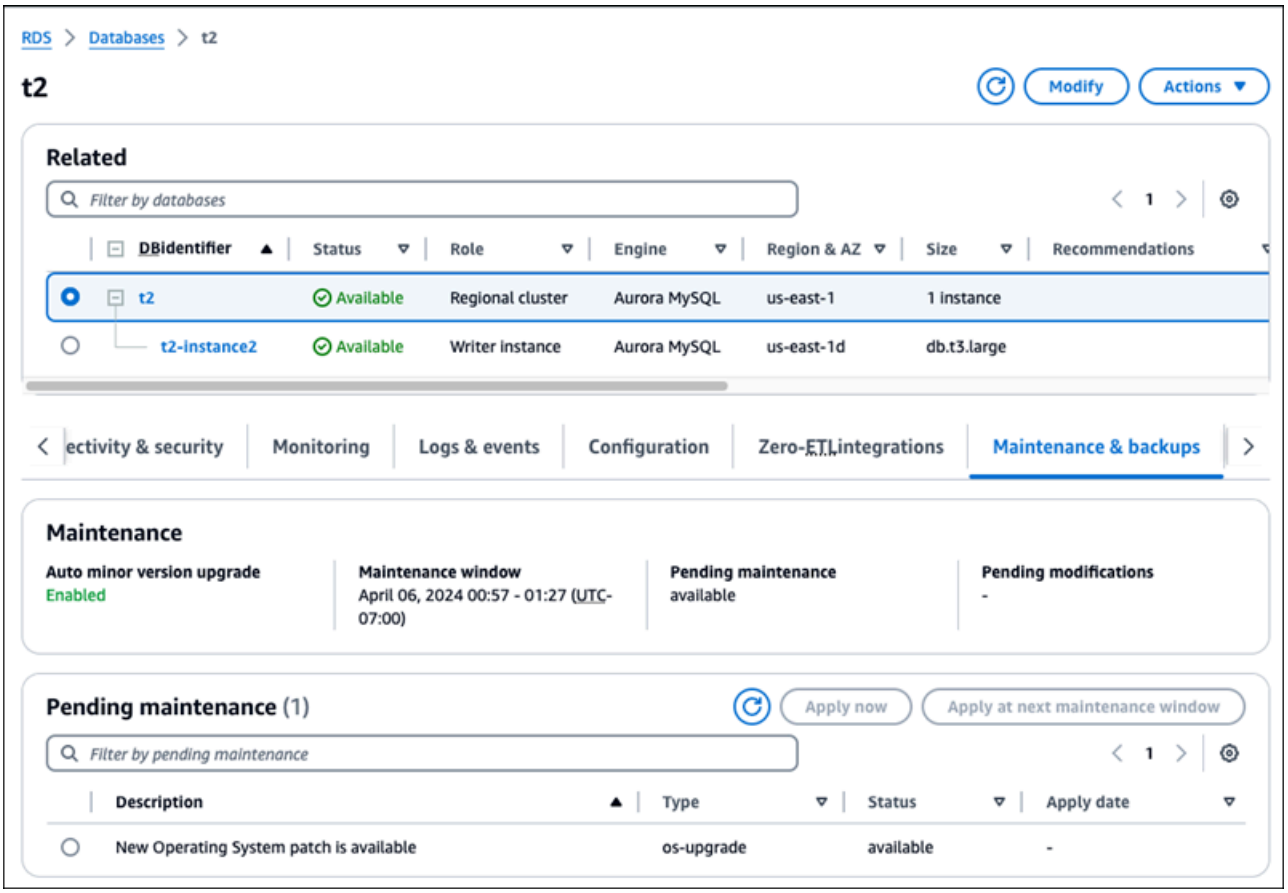


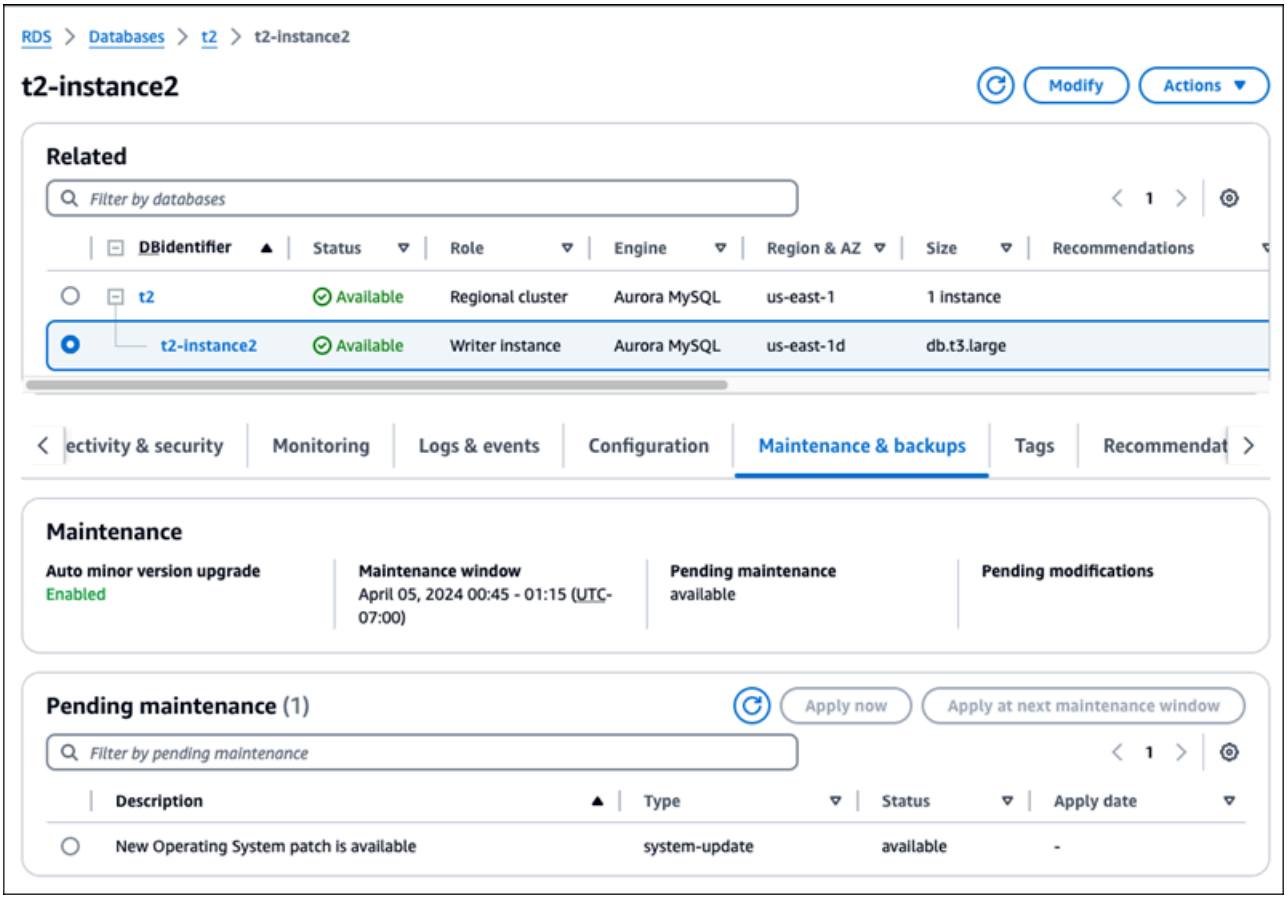

The following images show a DB cluster with a writer DB instance and a reader DB instance. The writer instance has a mandatory operating system upgrade available. The reader instance has an operating system patch available.

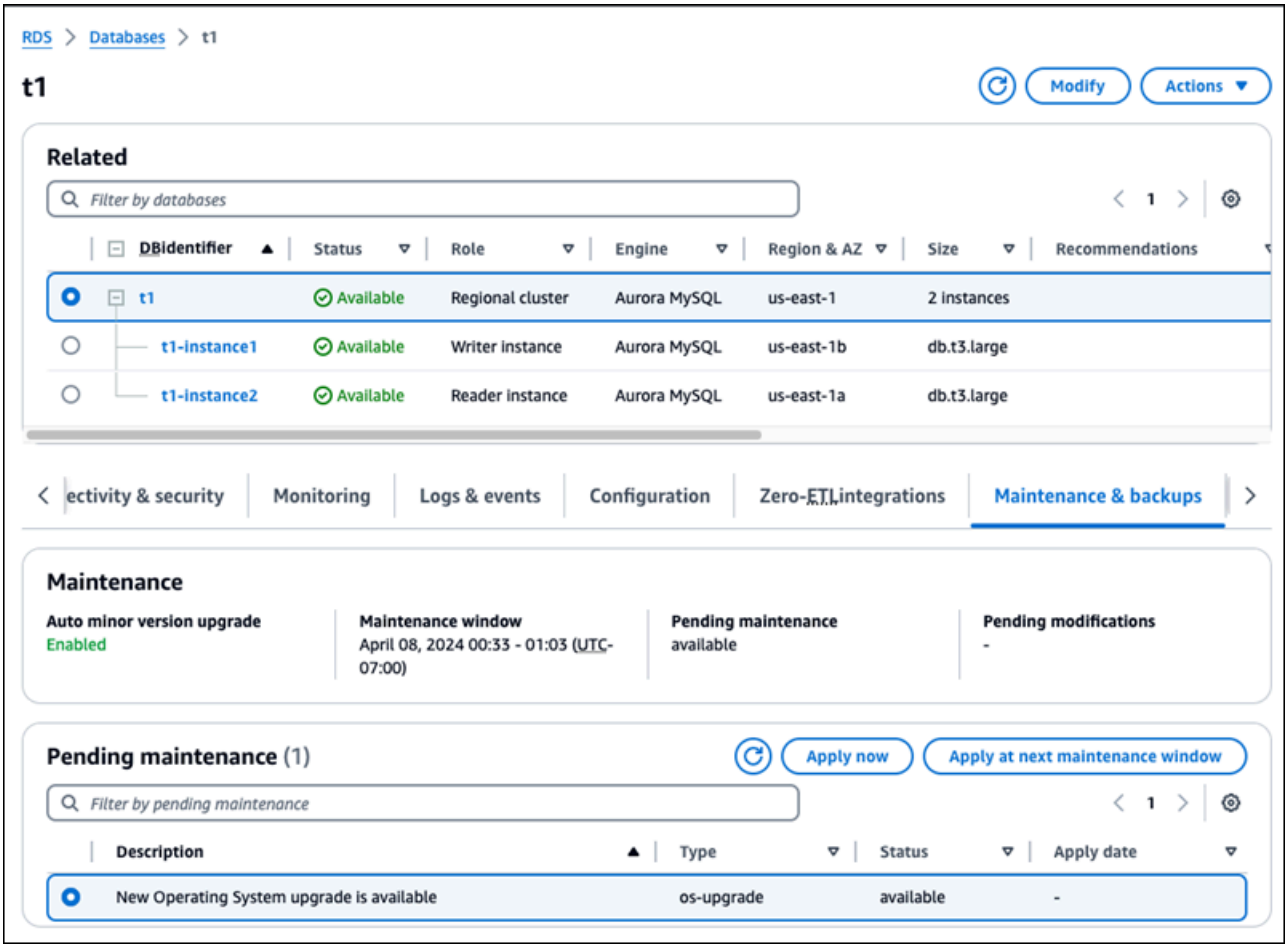
RDS > Databases > t1
t1
Modify
Actions
Related
Filter by databases
1
DBidentifier
Status
Role
Engine
Region & AZ
Size
Recommendations
t1
Available
Regional cluster
Aurora MySQL
us-east-1
2 instances
t1-instance1
Available
Writer instance
Aurora MySQL
us-east-1b
db.t3.large
t1-instance2
Available
Reader instance
Aurora MySQL
us-east-1a
db.t3.large
ectivity & security
Monitoring
Logs & events
Configuration
Zero-ETL integrations
Maintenance & backups
Maintenance
Auto minor version upgrade
Enabled
Maintenance window
April 08, 2024 00:33 - 01:03 (UTC-07:00)
Pending maintenance
available
Pending modifications
-
Pending maintenance (1)
Apply now
Apply at next maintenance window
Filter by pending maintenance
1
Description
Type
Status
Apply date
New Operating System upgrade is available
os-upgrade
available
-

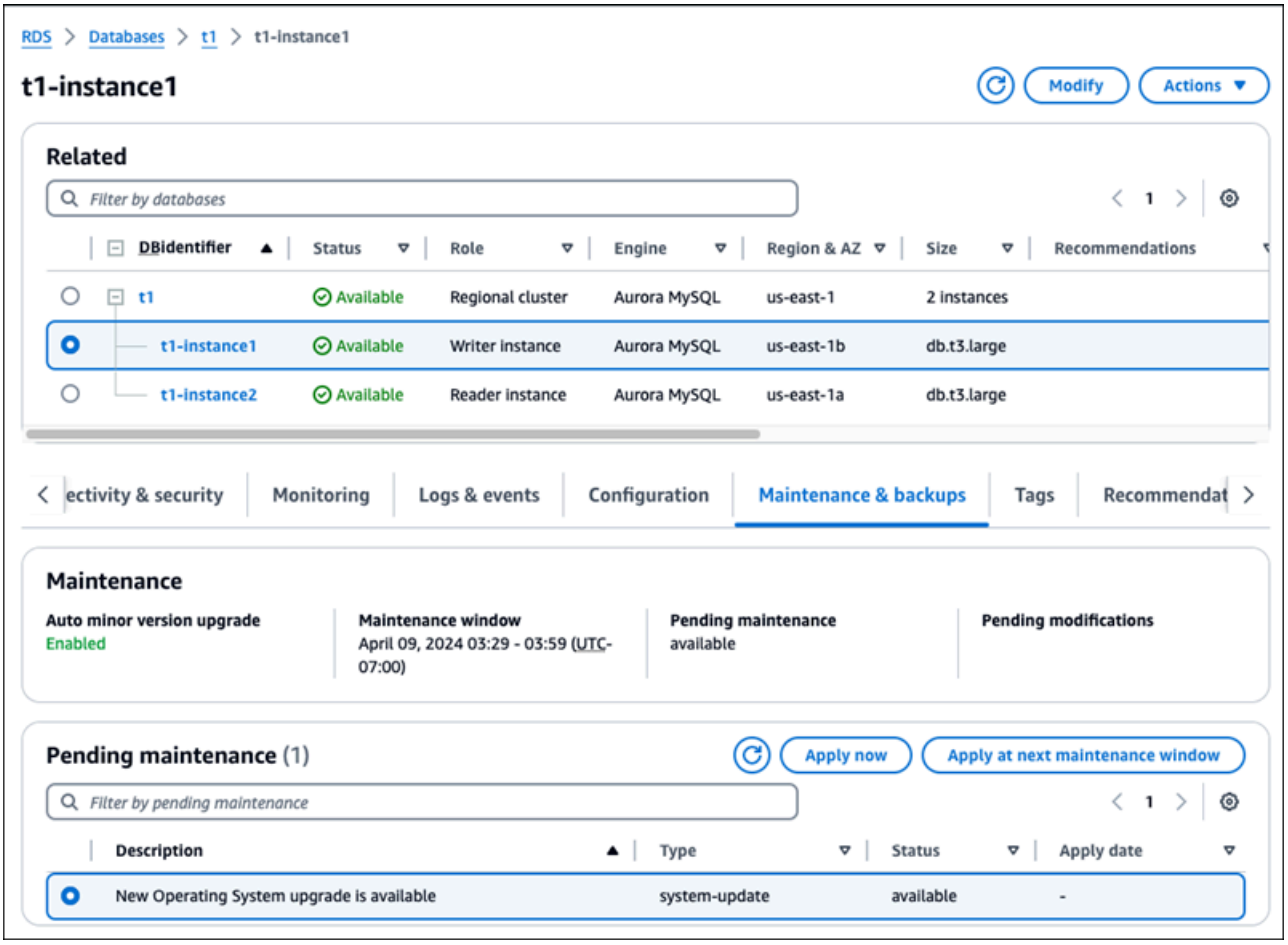
RDS > Databases > t1 > t1-instance1
t1-instance1
Modify
Actions
Related
Filter by databases
1
DBidentifier
Status
Role
Engine
Region & AZ
Size
Recommendations
t1
Available
Regional cluster
Aurora MySQL
us-east-1
2 instances
t1-instance1
Available
Writer instance
Aurora MySQL
us-east-1b
db.t3.large
t1-instance2
Available
Reader instance
Aurora MySQL
us-east-1a
db.t3.large
ectivity & security
Monitoring
Logs & events
Configuration
Maintenance & backups
Tags
Recommendat
Maintenance
Auto minor version upgrade
Enabled
Maintenance window
April 09, 2024 03:29 - 03:59 (UTC-07:00)
Pending maintenance
available
Pending modifications
Pending maintenance (1)
Apply now
Apply at next maintenance window
Filter by pending maintenance
1
Description
Type
Status
Apply date
New Operating System upgrade is available
system-update
available
-

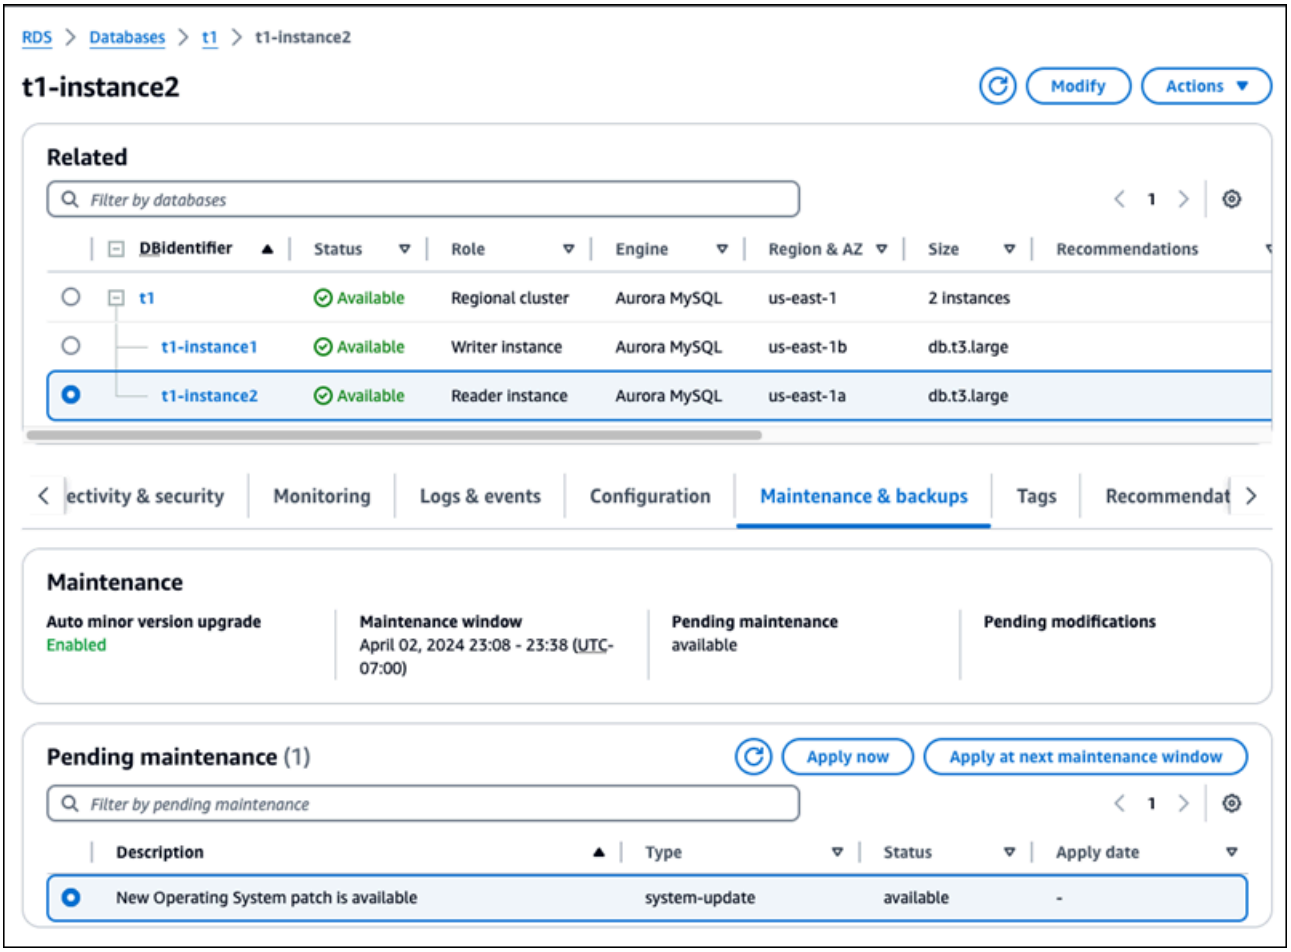

Amazon CLI

To get update information from the Amazon CLI, use the [describe-pending-maintenance-actions](#) command.

```
aws rds describe-pending-maintenance-actions
```

The following output shows an operating system distribution upgrade for a DB cluster and a DB instance.

```
{
  "PendingMaintenanceActions": [
    {
      "ResourceIdentifier": "arn:aws-cn:rds:us-east-1:123456789012:cluster:t3",
      "PendingMaintenanceActionDetails": [
        {
          "Action": "os-upgrade",
          "Description": "New Operating System upgrade is available"
```

```
        }
      ]
    },
    {
      "ResourceIdentifier": "arn:aws-cn:rds:us-east-1:123456789012:db:t3-instance1",
      "PendingMaintenanceActionDetails": [
        {
          "Action": "system-update",
          "Description": "New Operating System upgrade is available"
        }
      ]
    },
  ]
}
```

The following output shows an operating system patch for a DB instance.

```
{
  "ResourceIdentifier": "arn:aws-cn:rds:us-east-1:123456789012:db:mydb2",
  "PendingMaintenanceActionDetails": [
    {
      "Action": "system-update",
      "Description": "New Operating System patch is available"
    }
  ]
}
```

Availability of operating system updates

Operating system updates are specific to DB engine version and DB instance class. Therefore, DB instances receive or require updates at different times. When an operating system update is available for your DB instance based on its engine version and instance class, the update appears in the console. It can also be viewed by running the describe-pending-maintenance-actions Amazon CLI command or by calling the DescribePendingMaintenanceActions RDS API operation. If an update is available for your instance, you can update your operating system by following the instructions in Applying updates to a DB cluster.

Using Amazon Organizations upgrade rollout policy for automatic minor version upgrades

Aurora supports Amazon Organizations upgrade rollout policy to manage automatic minor version upgrades across multiple database resources and Amazon Web Services accounts. This policy helps you implement a controlled upgrade strategy for your clusters by:

How upgrade rollout policy works

When a new minor engine version becomes eligible for automatic upgrade, the policy controls the upgrade sequence based on defined orders:

- Resources marked as [first] (typically development environments) become eligible for upgrades during their maintenance windows.
- After a designated bake time, resources marked as [second] become eligible.
- After another designated bake time, resources marked as [last] (typically production environments) become eligible.
- Monitoring upgrade progress through Amazon Health notifications.

You can define your upgrade orders by:

- Account-level policies – Apply to all eligible resources in specified accounts.
- Resource tags – Apply to specific resources based on tags.

> **Note**
>
> Resources not configured with an upgrade policy or excluded from the policy automatically receive an upgrade order of [second].

Prerequisites

- Your Amazon Web Services account must be part of an organization in Organizations with upgrade rollout policy enabled
- Enable automatic minor version upgrades for your clusters

- Tags are not strictly required for upgrade rollout policy. If you want to define specific upgrade orders for different environments (for example, development, test, QA, production), you can use tags. If you don't include tag settings in your policy, all resources under that policy follow the default upgrade order. For Aurora resources, only cluster-level tags are used for upgrade rollout policy, even if you have tags defined at the instance level.

To tag your resources

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the cluster you want to tag.
4. Choose **Actions**, then choose **Manage tags**.
5. Choose **Add tag**.
6. Enter your tag key (for example, 'Environment') and value (for example, 'Development')
7. Choose **Add tag**, then **Save**.

You can also add tags using the Amazon CLI:

```
aws rds add-tags-to-resource \
    --resource-name arn:aws:rds:region:account-number:cluster:cluster-name \
    --tags Key=Environment,Value=Development
```

Upgrade order and phases

The upgrade rollout policy supports three upgrade orders:

- [first] - Typically used for development or testing environments
- [second] - Typically used for QA environments. Default order for resources if policy is not specifically configured
- [last] - Usually reserved for production environments

When a new minor engine version becomes eligible for automatic upgrade:

- Resources with upgrade order [first] become eligible for upgrades during their configured maintenance windows.

- After a designated bake time, resources with upgrade order [second] become eligible for upgrades during their maintenance windows.
- After another designated bake time, resources with upgrade order [last] become eligible for upgrades during their maintenance windows.
- The automatic minor version upgrade campaign closes after all eligible resources with upgrade orders [first], [second], and [last] have been upgraded, or when the campaign reaches its scheduled end date, whichever comes first.

> **Note**
>
> All automatic minor version upgrades are performed during each cluster's configured maintenance window to minimize potential impact to your applications.

Observability

Amazon Health and monitoring

You receive Amazon health notifications:

- Before the start of an automatic minor version upgrade campaign
- Between each phase transition to help track and monitor upgrade progress
- Progress updates showing the number of resources upgraded across your fleet in the Amazon Health console

Amazon RDS event notifications:

- Notifications for resources enabled for automatic minor version upgrades, including:
  - When your resource becomes eligible for upgrade based on its upgrade order ([first], [second], or [last])
  - Scheduled upgrade timeline during the maintenance window
  - Individual database upgrade start and completion status
- Subscribe to these events through Amazon EventBridge0 for automated monitoring

Considerations

Some considerations to keep in mind:

- The policy applies to all future automatic minor version upgrade campaigns, including policy changes made during active campaigns.
- If you join an ongoing upgrade campaign, your resources follow the current running upgrade order and do not wait for a configured policy.
- Resources not configured with an upgrade policy or excluded from the policy automatically receive an upgrade order of [second].
- The policy provides validation periods between upgrade phases before proceeding to the next phase.
- Changes to either the policy or resource tags require time to propagate before the new upgrade order is applied.
- The policy applies only to Aurora resources with automatic minor version upgrades enabled.
- If you detect an issue within an environment, you can turn off automatic minor version upgrades for subsequent environments or use the validation period to resolve issues before upgrades proceed to the next upgrade order.

For more information about tagging RDS resources, see Tagging Amazon Aurora andAmazon RDS resources. For detailed instructions on setting up and using upgrade rollout policy, see Getting started with Amazon Organizations in the *Amazon Organizations User Guide*.

Rebooting an Amazon Aurora DB cluster or Amazon Aurora DB instance

You might need to reboot your DB cluster or some instances within the cluster, usually for maintenance reasons. For example, suppose that you modify the parameters within a parameter group or associate a different parameter group with your cluster. In these cases, you must reboot the cluster for the changes to take effect. Similarly, you might reboot one or more reader DB instances within the cluster. You can arrange the reboot operations for individual instances to minimize downtime for the entire cluster.

The time required to reboot each DB instance in your cluster depends on the database activity at the time of reboot. It also depends on the recovery process of your specific DB engine. If it's practical, reduce database activity on that particular instance before starting the reboot process. Doing so can reduce the time needed to restart the database.

You can only reboot each DB instance in your cluster when it's in the available state. A DB instance can be unavailable for several reasons. These include the cluster being stopped state, a modification being applied to the instance, and a maintenance-window action such as a version upgrade.

Rebooting a DB instance restarts the database engine process. Rebooting a DB instance results in a momentary outage, during which the DB instance status is set to *rebooting*.

> **Note**
>
> If a DB instance isn't using the latest changes to its associated DB parameter group, the Amazon Web Services Management Console shows the DB parameter group with a status of **pending-reboot**. The **pending-reboot** parameter groups status doesn't result in an automatic reboot during the next maintenance window. To apply the latest parameter changes to that DB instance, manually reboot the DB instance. For more information about parameter groups, see Parameter groups for Amazon Aurora.

Topics

- Rebooting a DB instance within an Aurora cluster
- Rebooting an Aurora cluster with read availability
- Rebooting an Aurora cluster without read availability

- Checking uptime for Aurora clusters and instances
- Examples of Aurora reboot operations

Rebooting a DB instance within an Aurora cluster

This procedure is the most important operation that you take when performing reboots with Aurora. Many of the maintenance procedures involve rebooting one or more Aurora DB instances in a particular order.

Console

To reboot a DB instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB instance that you want to reboot.
3. For **Actions**, choose **Reboot**.

   The **Reboot DB Instance** page appears.
4. Choose **Reboot** to reboot your DB instance.

   Or choose **Cancel**.

Amazon CLI

To reboot a DB instance by using the Amazon CLI, call the `reboot-db-instance` command.

Example

For Linux, macOS, or Unix:

```
aws rds reboot-db-instance \
    --db-instance-identifier mydbinstance
```

For Windows:

```
aws rds reboot-db-instance ^
```

```
    --db-instance-identifier mydbinstance
```

RDS API

To reboot a DB instance by using the Amazon RDS API, call the `RebootDBInstance` operation.

Rebooting an Aurora cluster with read availability

With the read availability feature, you can reboot the writer instance of your Aurora cluster without rebooting the reader instances in the primary or secondary DB cluster. Doing so can help maintain high availability of the cluster for read operations while you reboot the writer instance. You can reboot the reader instances later, on a schedule that's convenient for you. For example, in a production cluster you might reboot the reader instances one at a time, starting only after the reboot of the primary instance is finished. For each DB instance that you reboot, follow the procedure in Rebooting a DB instance within an Aurora cluster.

The read availability feature for primary DB clusters is available in Aurora MySQL version 2.10 and higher, including version 8.4. Read availability for secondary DB clusters is available in Aurora MySQL version 3.06 and higher, including version 8.4.

For Aurora PostgreSQL this feature is available by default in the following versions:

- 15.2 and higher 15 versions
- 14.7 and higher 14 versions
- 13.10 and higher 13 versions
- 12.14 and higher 12 versions

For more information on the read availability feature in Aurora PostgreSQL, see Improving the read availability of Aurora Replicas.

Before this feature, rebooting the primary instance caused a reboot for each reader instance at the same time. If your Aurora cluster is running an older version, use the reboot procedure in Rebooting an Aurora cluster without read availability instead.

> **Note**
>
> The change to reboot behavior in Aurora DB clusters with read availability is different for Aurora global databases in Aurora MySQL versions lower than 3.06. If you reboot the writer

instance for the primary cluster in an Aurora global database, the reader instances in the primary cluster remain available. However, the DB instances in any secondary clusters reboot at the same time.
A limited version of the improved read availability feature is supported by Aurora global databases for Aurora PostgreSQL versions 12.16, 13.12, 14.9, 15.4, and higher.

You frequently reboot the cluster after making changes to cluster parameter groups. You make parameter changes by following the procedures in Parameter groups for Amazon Aurora. Suppose that you reboot the writer DB instance in an Aurora cluster to apply changes to cluster parameters. Some or all of the reader DB instances might continue using the old parameter settings. However, the different parameter settings don't affect the data integrity of the cluster. Any cluster parameters that affect the organization of data files are only used by the writer DB instance.

For example, in an Aurora MySQL cluster, you can update cluster parameters such as `binlog_format` and `innodb_purge_threads` on the writer instance before the reader instances. Only the writer instance is writing binary logs and purging undo records. For parameters that change how queries interpret SQL statements or query output, you might need to take care to reboot the reader instances immediately. You do this to avoid unexpected application behavior during queries. For example, suppose that you change the `lower_case_table_names` parameter and reboot the writer instance. In this case, the reader instances might not be able to access a newly created table until they are all rebooted.

For a list of all the Aurora MySQL cluster parameters, see Cluster-level parameters.

For a list of all the Aurora PostgreSQL cluster parameters, see Aurora PostgreSQL cluster-level parameters.

Tip

Aurora MySQL might still reboot some of the reader instances along with the writer instance if your cluster is processing a workload with high throughput.
The reduction in the number of reboots applies during failover operations also. Aurora MySQL only restarts the writer DB instance and the failover target during a failover. Other reader DB instances in the cluster remain available to continue processing queries through connections to the reader endpoint. Thus, you can improve availability during a failover by having more than one reader DB instance in a cluster.

Rebooting an Aurora cluster without read availability

Without the read availability feature, you reboot an entire Aurora DB cluster by rebooting the writer DB instance of that cluster. To do so, follow the procedure in Rebooting a DB instance within an Aurora cluster.

Rebooting the writer DB instance also initiates a reboot for each reader DB instance in the cluster. That way, any cluster-wide parameter changes are applied to all DB instances at the same time. However, the reboot of all DB instances causes a brief outage for the cluster. The reader DB instances remain unavailable until the writer DB instance finishes rebooting and becomes available.

This reboot behavior applies to all DB clusters created in Aurora MySQL version 2.09 and lower.

For Aurora PostgreSQL this behavior applies to the following versions:

- 14.6 and lower 14 versions
- 13.9 and lower 13 versions
- 12.13 and lower 12 versions
- All PostgreSQL 11 versions

In the RDS console, the writer DB instance has the value **Writer** under the **Role** column on the **Databases** page. In the RDS CLI, the output of the `describe-db-clusters` command includes a section `DBClusterMembers`. The `DBClusterMembers` element representing the writer DB instance has a value of `true` for the `IsClusterWriter` field.

> **Important**
>
> With the read availability feature, the reboot behavior is different in Aurora MySQL and Aurora PostgreSQL: the reader DB instances typically remain available while you reboot the writer instance. Then you can reboot the reader instances at a convenient time. You can reboot the reader instances on a staggered schedule if you want some reader instances to always be available. For more information, see Rebooting an Aurora cluster with read availability.

Checking uptime for Aurora clusters and instances

You can check and monitor the length of time since the last reboot for each DB instance in your Aurora cluster. The Amazon CloudWatch metric `EngineUptime` reports the number of seconds since the last time a DB instance was started. You can examine this metric at a point in time to find out the uptime for the DB instance. You can also monitor this metric over time to detect when the instance is rebooted.

You can also examine the `EngineUptime` metric at the cluster level. The `Minimum` and `Maximum` dimensions report the smallest and largest uptime values for all DB instances in the cluster. To check the most recent time when any reader instance in a cluster was rebooted, or restarted for another reason, monitor the cluster-level metric using the `Minimum` dimension. To check which instance in the cluster has gone the longest without a reboot, monitor the cluster-level metric using the `Maximum` dimension. For example, you might want to confirm that all DB instances in the cluster were rebooted after a configuration change.

Tip

For long-term monitoring, we recommend monitoring the `EngineUptime` metric for individual instances instead of at the cluster level. The cluster-level `EngineUptime` metric is set to zero when a new DB instance is added to the cluster. Such cluster changes can happen as part of maintenance and scaling operations such as those performed by Auto Scaling.

The following CLI examples show how to examine the `EngineUptime` metric for the writer and reader instances in a cluster. The examples use a cluster named `tpch100g`. This cluster has a writer DB instance `instance-1234`. It also has two reader DB instances, `instance-7448` and `instance-6305`.

First, the `reboot-db-instance` command reboots one of the reader instances. The `wait` command waits until the instance is finished rebooting.

```
$ aws rds reboot-db-instance --db-instance-identifier instance-6305
{
    "DBInstance": {
        "DBInstanceIdentifier": "instance-6305",
        "DBInstanceStatus": "rebooting",
...
```

```
$ aws rds wait db-instance-available --db-instance-id instance-6305
```

The CloudWatch `get-metric-statistics` command examines the `EngineUptime` metric over the last five minutes at one-minute intervals. The uptime for the `instance-6305` instance is reset to zero and begins counting upwards again. This Amazon CLI example for Linux uses `$( )` variable substitution to insert the appropriate timestamps into the CLI commands. It also uses the Linux `sort` command to order the output by the time the metric was collected. That timestamp value is the third field in each line of output.

```
$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" \
  --period 60 --namespace "AWS/RDS" --statistics Maximum \
  --dimensions Name=DBInstanceIdentifier,Value=instance-6305 --output text \
  | sort -k 3
EngineUptime
DATAPOINTS 231.0 2021-03-16T18:19:00+00:00 Seconds
DATAPOINTS 291.0 2021-03-16T18:20:00+00:00 Seconds
DATAPOINTS 351.0 2021-03-16T18:21:00+00:00 Seconds
DATAPOINTS 411.0 2021-03-16T18:22:00+00:00 Seconds
DATAPOINTS 471.0 2021-03-16T18:23:00+00:00 Seconds
```

The minimum uptime for the cluster is reset to zero because one of the instances in the cluster was rebooted. The maximum uptime for the cluster isn't reset because at least one of the DB instances in the cluster remained available.

```
$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" \
  --period 60 --namespace "AWS/RDS" --statistics Minimum \
  --dimensions Name=DBClusterIdentifier,Value=tpch100g --output text \
  | sort -k 3
EngineUptime
DATAPOINTS 63099.0 2021-03-16T18:12:00+00:00 Seconds
DATAPOINTS 63159.0 2021-03-16T18:13:00+00:00 Seconds
DATAPOINTS 63219.0 2021-03-16T18:14:00+00:00 Seconds
DATAPOINTS 63279.0 2021-03-16T18:15:00+00:00 Seconds
DATAPOINTS 51.0 2021-03-16T18:16:00+00:00 Seconds

$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" \
  --period 60 --namespace "AWS/RDS" --statistics Maximum \
  --dimensions Name=DBClusterIdentifier,Value=tpch100g --output text \
```

```
  | sort -k 3
EngineUptime
DATAPOINTS 63389.0 2021-03-16T18:16:00+00:00 Seconds
DATAPOINTS 63449.0 2021-03-16T18:17:00+00:00 Seconds
DATAPOINTS 63509.0 2021-03-16T18:18:00+00:00 Seconds
DATAPOINTS 63569.0 2021-03-16T18:19:00+00:00 Seconds
DATAPOINTS 63629.0 2021-03-16T18:20:00+00:00 Seconds
```

Then another `reboot-db-instance` command reboots the writer instance of the cluster. Another `wait` command pauses until the writer instance is finished rebooting.

```
$ aws rds reboot-db-instance --db-instance-identifier instance-1234
{
  "DBInstanceIdentifier": "instance-1234",
  "DBInstanceStatus": "rebooting",
...
$ aws rds wait db-instance-available --db-instance-id instance-1234
```

Now the `EngineUptime` metric for the writer instance shows that the instance `instance-1234` was rebooted recently. The reader instance `instance-6305` was also rebooted automatically along with the writer instance. This cluster is running Aurora MySQL 2.09, which doesn't keep the reader instances running as the writer instance reboots.

```
$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" \
  --period 60 --namespace "AWS/RDS" --statistics Maximum \
  --dimensions Name=DBInstanceIdentifier,Value=instance-1234 --output text \
  | sort -k 3
EngineUptime
DATAPOINTS 63749.0 2021-03-16T18:22:00+00:00 Seconds
DATAPOINTS 63809.0 2021-03-16T18:23:00+00:00 Seconds
DATAPOINTS 63869.0 2021-03-16T18:24:00+00:00 Seconds
DATAPOINTS 41.0 2021-03-16T18:25:00+00:00 Seconds
DATAPOINTS 101.0 2021-03-16T18:26:00+00:00 Seconds

$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" \
  --period 60 --namespace "AWS/RDS" --statistics Maximum \
  --dimensions Name=DBInstanceIdentifier,Value=instance-6305 --output text \
  | sort -k 3
EngineUptime
DATAPOINTS 411.0 2021-03-16T18:22:00+00:00 Seconds
```

```
DATAPOINTS 471.0 2021-03-16T18:23:00+00:00 Seconds
DATAPOINTS 531.0 2021-03-16T18:24:00+00:00 Seconds
DATAPOINTS 49.0 2021-03-16T18:26:00+00:00 Seconds
```

Examples of Aurora reboot operations

The following Aurora MySQL examples show different combinations of reboot operations for reader and writer DB instances in an Aurora DB cluster. After each reboot, SQL queries demonstrate the uptime for the instances in the cluster.

Topics

- Finding the writer and reader instances for an Aurora cluster
- Rebooting a single reader instance
- Rebooting the writer instance
- Rebooting the writer and readers independently
- Applying a cluster parameter change to an Aurora MySQL version 2.10 cluster

Finding the writer and reader instances for an Aurora cluster

In an Aurora MySQL cluster with multiple DB instances, it's important to know which one is the writer and which ones are the readers. The writer and reader instances also can switch roles when a failover operation happens. Thus, it's best to perform a check like the following before doing any operation that requires a writer or reader instance. In this case, the `False` values for `IsClusterWriter` identify the reader instances, `instance-6305` and `instance-7448`. The `True` value identifies the writer instance, `instance-1234`.

```
$ aws rds describe-db-clusters --db-cluster-id tpch100g \
  --query "*[].['Cluster:',DBClusterIdentifier,DBClusterMembers[*].
['Instance:',DBInstanceIdentifier,IsClusterWriter]]" \
  --output text
Cluster:     tpch100g
Instance:    instance-6305    False
Instance:    instance-7448    False
Instance:    instance-1234    True
```

Before we start the examples of rebooting, the writer instance has an uptime of approximately one week. The SQL query in this example shows a MySQL-specific way to check the uptime. You might

use this technique in a database application. For another technique that uses the Amazon CLI and works for both Aurora engines, see Checking uptime for Aurora clusters and instances.

```
$ mysql -h instance-7448.a12345.us-east-1.rds.amazonaws.com -P 3306 -u my-user -p
...
mysql> select date_sub(now(), interval variable_value second) "Last Startup",
    -> time_format(sec_to_time(variable_value),'%Hh %im') as "Uptime"
    -> from performance_schema.global_status
    -> where variable_name='Uptime';
+----------------------------+---------+
| Last Startup               | Uptime  |
+----------------------------+---------+
| 2021-03-08 17:49:06.000000 | 174h 42m|
+----------------------------+---------+
```

Rebooting a single reader instance

This example reboots one of the reader DB instances. Perhaps this instance was overloaded by a huge query or many concurrent connections. Or perhaps it fell behind the writer instance because of a network issue. After starting the reboot operation, the example uses a `wait` command to pause until the instance becomes available. By that point, the instance has an uptime of a few minutes.

```
$ aws rds reboot-db-instance --db-instance-identifier instance-6305
{
    "DBInstance": {
        "DBInstanceIdentifier": "instance-6305",
        "DBInstanceStatus": "rebooting",
...
    }
}
$ aws rds wait db-instance-available --db-instance-id instance-6305
$ mysql -h instance-6305.a12345.us-east-1.rds.amazonaws.com -P 3306 -u my-user -p
...
mysql> select date_sub(now(), interval variable_value second) "Last Startup",
    -> time_format(sec_to_time(variable_value),'%Hh %im') as "Uptime"
    -> from performance_schema.global_status
    -> where variable_name='Uptime';
+----------------------------+---------+
| Last Startup               | Uptime  |
+----------------------------+---------+
| 2021-03-16 00:35:02.000000 | 00h 03m |
```

```
+----------------------------+---------+
```

Rebooting the reader instance didn't affect the uptime of the writer instance. It still has an uptime of about one week.

```
$ mysql -h instance-7448.a12345.us-east-1.rds.amazonaws.com -P 3306 -u my-user -p
...
mysql> select date_sub(now(), interval variable_value second) "Last Startup",
    -> time_format(sec_to_time(variable_value),'%Hh %im') as "Uptime"
    -> from performance_schema.global_status where variable_name='Uptime';
+----------------------------+----------+
| Last Startup               | Uptime   |
+----------------------------+----------+
| 2021-03-08 17:49:06.000000 | 174h 49m |
+----------------------------+----------+
```

Rebooting the writer instance

This example reboots the writer instance. This cluster is running Aurora MySQL version 2.09. Because the Aurora MySQL version is lower than 2.10, rebooting the writer instance also reboots any reader instances in the cluster.

A `wait` command pauses until the reboot is finished. Now the uptime for that instance is reset to zero. It's possible that a reboot operation might take substantially different times for writer and reader DB instances. The writer and reader DB instances perform different kinds of cleanup operations depending on their roles.

```
$ aws rds reboot-db-instance --db-instance-identifier instance-1234
{
    "DBInstance": {
        "DBInstanceIdentifier": "instance-1234",
        "DBInstanceStatus": "rebooting",
...
    }
}
$ aws rds wait db-instance-available --db-instance-id instance-1234
$ mysql -h instance-1234.a12345.us-east-1.rds.amazonaws.com -P 3306 -u my-user -p
...
mysql> select date_sub(now(), interval variable_value second) "Last Startup",
    -> time_format(sec_to_time(variable_value),'%Hh %im') as "Uptime"
    -> from performance_schema.global_status where variable_name='Uptime';
```

```
+----------------------------+---------+
| Last Startup               | Uptime  |
+----------------------------+---------+
| 2021-03-16 00:40:27.000000 | 00h 00m |
+----------------------------+---------+
```

After the reboot for the writer DB instance, both of the reader DB instances also have their uptime reset. Rebooting the writer instance caused the reader instances to reboot also. This behavior applies to Aurora PostgreSQL clusters and to Aurora MySQL clusters before version 2.10.

```
$ mysql -h instance-7448.a12345.us-east-1.rds.amazonaws.com -P 3306 -u my-user -p
...
mysql> select date_sub(now(), interval variable_value second) "Last Startup",
    -> time_format(sec_to_time(variable_value),'%Hh %im') as "Uptime"
    -> from performance_schema.global_status where variable_name='Uptime';
+----------------------------+---------+
| Last Startup               | Uptime  |
+----------------------------+---------+
| 2021-03-16 00:40:35.000000 | 00h 00m |
+----------------------------+---------+

$ mysql -h instance-6305.a12345.us-east-1.rds.amazonaws.com -P 3306 -u my-user -p
...
mysql> select date_sub(now(), interval variable_value second) "Last Startup",
    -> time_format(sec_to_time(variable_value),'%Hh %im') as "Uptime"
    -> from performance_schema.global_status where variable_name='Uptime';
+----------------------------+---------+
| Last Startup               | Uptime  |
+----------------------------+---------+
| 2021-03-16 00:40:33.000000 | 00h 01m |
+----------------------------+---------+
```

Rebooting the writer and readers independently

These next examples show a cluster that runs Aurora MySQL version 2.10. In this Aurora MySQL version and higher, you can reboot the writer instance without causing reboots for all the reader instances. That way, your query-intensive applications don't experience any outage when you reboot the writer instance. You can reboot the reader instances later. You might do those reboots at a time of low query traffic. You might also reboot the reader instances one at a time. That way, at least one reader instance is always available for the query traffic of your application.

The following example uses a cluster named `cluster-2393`, running Aurora MySQL version `5.7.mysql_aurora.2.10.0`. This cluster has a writer instance named `instance-9404` and three reader instances named `instance-6772`, `instance-2470`, and `instance-5138`.

```
$ aws rds describe-db-clusters --db-cluster-id cluster-2393 \
  --query "*[].['Cluster:',DBClusterIdentifier,DBClusterMembers[*].
['Instance:',DBInstanceIdentifier,IsClusterWriter]]" \
  --output text
Cluster:        cluster-2393
Instance:       instance-5138        False
Instance:       instance-2470        False
Instance:       instance-6772        False
Instance:       instance-9404        True
```

Checking the `uptime` value of each database instance through the `mysql` command shows that each one has roughly the same uptime. For example, here is the uptime for `instance-5138`.

```
mysql> SHOW GLOBAL STATUS LIKE 'uptime';
+---------------+-------+
| Variable_name | Value |
+---------------+-------+
| Uptime        | 3866  |
+---------------+-------+
```

By using CloudWatch, we can get the corresponding uptime information without actually logging into the instances. That way, an administrator can monitor the database but can't view or change any table data. In this case, we specify a time period spanning five minutes, and check the uptime value every minute. The increasing uptime values demonstrate that the instances weren't restarted during that period.

```
$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --namespace "AWS/RDS" --statistics Minimum --dimensions
 Name=DBInstanceIdentifier,Value=instance-9404 \
  --output text | sort -k 3
EngineUptime
DATAPOINTS 4648.0 2021-03-17T23:42:00+00:00 Seconds
DATAPOINTS 4708.0 2021-03-17T23:43:00+00:00 Seconds
DATAPOINTS 4768.0 2021-03-17T23:44:00+00:00 Seconds
DATAPOINTS 4828.0 2021-03-17T23:45:00+00:00 Seconds
DATAPOINTS 4888.0 2021-03-17T23:46:00+00:00 Seconds
```

```
$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --namespace "AWS/RDS" --statistics Minimum --dimensions
 Name=DBInstanceIdentifier,Value=instance-6772 \
  --output text | sort -k 3
EngineUptime
DATAPOINTS 4315.0 2021-03-17T23:42:00+00:00 Seconds
DATAPOINTS 4375.0 2021-03-17T23:43:00+00:00 Seconds
DATAPOINTS 4435.0 2021-03-17T23:44:00+00:00 Seconds
DATAPOINTS 4495.0 2021-03-17T23:45:00+00:00 Seconds
DATAPOINTS 4555.0 2021-03-17T23:46:00+00:00 Seconds
```

Now we reboot one of the reader instances, `instance-5138`. We wait for the instance to become available again after the reboot. Now monitoring the uptime over a five-minute period shows that the uptime was reset to zero during that time. The most recent uptime value was measured five seconds after the reboot finished.

```
$ aws rds reboot-db-instance --db-instance-identifier instance-5138
{
  "DBInstanceIdentifier": "instance-5138",
  "DBInstanceStatus": "rebooting"
}
$ aws rds wait db-instance-available --db-instance-id instance-5138

$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --namespace "AWS/RDS" --statistics Minimum --dimensions
 Name=DBInstanceIdentifier,Value=instance-5138 \
  --output text | sort -k 3
EngineUptime
DATAPOINTS 4500.0 2021-03-17T23:46:00+00:00 Seconds
DATAPOINTS 4560.0 2021-03-17T23:47:00+00:00 Seconds
DATAPOINTS 4620.0 2021-03-17T23:48:00+00:00 Seconds
DATAPOINTS 4680.0 2021-03-17T23:49:00+00:00 Seconds
DATAPOINTS  5.0 2021-03-17T23:50:00+00:00 Seconds
```

Next, we perform a reboot for the writer instance, `instance-9404`. We compare the uptime values for the writer instance and one of the reader instances. By doing so, we can see that rebooting the writer didn't cause a reboot for the readers. In versions before Aurora MySQL 2.10, the uptime values for all the readers would be reset at the same time as the writer.

```
$ aws rds reboot-db-instance --db-instance-identifier instance-9404
{
  "DBInstanceIdentifier": "instance-9404",
  "DBInstanceStatus": "rebooting"
}
$ aws rds wait db-instance-available --db-instance-id instance-9404

$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --namespace "AWS/RDS" --statistics Minimum --dimensions
 Name=DBInstanceIdentifier,Value=instance-9404 \
  --output text | sort -k 3
EngineUptime
DATAPOINTS 371.0 2021-03-17T23:57:00+00:00 Seconds
DATAPOINTS 431.0 2021-03-17T23:58:00+00:00 Seconds
DATAPOINTS 491.0 2021-03-17T23:59:00+00:00 Seconds
DATAPOINTS 551.0 2021-03-18T00:00:00+00:00 Seconds
DATAPOINTS  37.0  2021-03-18T00:01:00+00:00 Seconds

$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --namespace "AWS/RDS" --statistics Minimum --dimensions
 Name=DBInstanceIdentifier,Value=instance-6772 \
  --output text | sort -k 3
EngineUptime
DATAPOINTS 5215.0 2021-03-17T23:57:00+00:00 Seconds
DATAPOINTS 5275.0 2021-03-17T23:58:00+00:00 Seconds
DATAPOINTS 5335.0 2021-03-17T23:59:00+00:00 Seconds
DATAPOINTS 5395.0 2021-03-18T00:00:00+00:00 Seconds
DATAPOINTS 5455.0 2021-03-18T00:01:00+00:00 Seconds
```

To make sure that all the reader instances have all the same changes to configuration parameters as the writer instance, reboot all the reader instances after the writer. This example reboots all the readers and then waits until all of them are available before proceeding.

```
$ aws rds reboot-db-instance --db-instance-identifier instance-6772
{
  "DBInstanceIdentifier": "instance-6772",
  "DBInstanceStatus": "rebooting"
}

$ aws rds reboot-db-instance --db-instance-identifier instance-2470
```

```
{
  "DBInstanceIdentifier": "instance-2470",
  "DBInstanceStatus": "rebooting"
}

$ aws rds reboot-db-instance --db-instance-identifier instance-5138
{
  "DBInstanceIdentifier": "instance-5138",
  "DBInstanceStatus": "rebooting"
}

$ aws rds wait db-instance-available --db-instance-id instance-6772
$ aws rds wait db-instance-available --db-instance-id instance-2470
$ aws rds wait db-instance-available --db-instance-id instance-5138
```

Now we can see that the writer DB instance has the highest uptime. This instance's uptime value increased steadily throughout the monitoring period. The reader DB instances were all rebooted after the reader. We can see the point within the monitoring period when each reader was rebooted and its uptime was reset to zero.

```
$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --namespace "AWS/RDS" --statistics Minimum --dimensions
 Name=DBInstanceIdentifier,Value=instance-9404 \
  --output text | sort -k 3
EngineUptime
DATAPOINTS 457.0 2021-03-18T00:08:00+00:00 Seconds
DATAPOINTS 517.0 2021-03-18T00:09:00+00:00 Seconds
DATAPOINTS 577.0 2021-03-18T00:10:00+00:00 Seconds
DATAPOINTS 637.0 2021-03-18T00:11:00+00:00 Seconds
DATAPOINTS  697.0 2021-03-18T00:12:00+00:00 Seconds

$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --namespace "AWS/RDS" --statistics Minimum --dimensions
 Name=DBInstanceIdentifier,Value=instance-2470 \
  --output text | sort -k 3
EngineUptime
DATAPOINTS 5819.0 2021-03-18T00:08:00+00:00 Seconds
DATAPOINTS  35.0  2021-03-18T00:09:00+00:00 Seconds
DATAPOINTS 95.0 2021-03-18T00:10:00+00:00 Seconds
DATAPOINTS 155.0 2021-03-18T00:11:00+00:00 Seconds
DATAPOINTS 215.0 2021-03-18T00:12:00+00:00 Seconds
```

```
$ aws cloudwatch get-metric-statistics --metric-name "EngineUptime" \
  --start-time "$(date -d '5 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --namespace "AWS/RDS" --statistics Minimum --dimensions
 Name=DBInstanceIdentifier,Value=instance-5138 \
  --output text | sort -k 3
EngineUptime
DATAPOINTS 1085.0 2021-03-18T00:08:00+00:00 Seconds
DATAPOINTS 1145.0 2021-03-18T00:09:00+00:00 Seconds
DATAPOINTS 1205.0 2021-03-18T00:10:00+00:00 Seconds
DATAPOINTS  49.0  2021-03-18T00:11:00+00:00 Seconds
DATAPOINTS 109.0 2021-03-18T00:12:00+00:00 Seconds
```

Applying a cluster parameter change to an Aurora MySQL version 2.10 cluster

The following example demonstrates how to apply a parameter change to all DB instances in your Aurora MySQL 2.10 cluster. With this Aurora MySQL version, you reboot the writer instance and all the reader instances independently.

The example uses the MySQL configuration parameter `lower_case_table_names` for illustration. When this parameter setting is different between the writer and reader DB instances, a query might not be able to access a table declared with an uppercase or mixed-case name. Or if two table names differ only in terms of uppercase and lowercase letters, a query might access the wrong table.

This example shows how to determine the writer and reader instances in the cluster by examining the `IsClusterWriter` attribute of each instance. The cluster is named `cluster-2393`. The cluster has a writer instance named `instance-9404`. The reader instances in the cluster are named `instance-5138` and `instance-2470`.

```
$ aws rds describe-db-clusters --db-cluster-id cluster-2393 \
  --query '*[].[DBClusterIdentifier,DBClusterMembers[*].
[DBInstanceIdentifier,IsClusterWriter]]' \
  --output text
cluster-2393
instance-5138        False
instance-2470        False
instance-9404        True
```

To demonstrate the effects of changing the `lower_case_table_names` parameter, we set up two DB cluster parameter groups. The `lower-case-table-names-0` parameter group has this

parameter set to 0. The `lower-case-table-names-1` parameter group has this parameter group set to 1.

```
$ aws rds create-db-cluster-parameter-group --description 'lower-case-table-names-0' \
  --db-parameter-group-family aurora-mysql5.7 \
  --db-cluster-parameter-group-name lower-case-table-names-0
{
    "DBClusterParameterGroup": {
        "DBClusterParameterGroupName": "lower-case-table-names-0",
        "DBParameterGroupFamily": "aurora-mysql5.7",
        "Description": "lower-case-table-names-0"
    }
}

$ aws rds create-db-cluster-parameter-group --description 'lower-case-table-names-1' \
  --db-parameter-group-family aurora-mysql5.7 \
  --db-cluster-parameter-group-name lower-case-table-names-1
{
    "DBClusterParameterGroup": {
        "DBClusterParameterGroupName": "lower-case-table-names-1",
        "DBParameterGroupFamily": "aurora-mysql5.7",
        "Description": "lower-case-table-names-1"
    }
}

$ aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name lower-case-table-names-0 \
  --parameters
 ParameterName=lower_case_table_names,ParameterValue=0,ApplyMethod=pending-reboot
{
    "DBClusterParameterGroupName": "lower-case-table-names-0"
}

$ aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name lower-case-table-names-1 \
    --parameters
 ParameterName=lower_case_table_names,ParameterValue=1,ApplyMethod=pending-reboot
{
    "DBClusterParameterGroupName": "lower-case-table-names-1"
}
```

The default value of `lower_case_table_names` is 0. With this parameter setting, the table `foo` is distinct from the table F00. This example verifies that the parameter is still at its default setting.

Then the example creates three tables that differ only in uppercase and lowercase letters in their names.

```
mysql> create database lctn;
Query OK, 1 row affected (0.07 sec)

mysql> use lctn;
Database changed
mysql> select @@lower_case_table_names;
+--------------------------+
| @@lower_case_table_names |
+--------------------------+
|                        0 |
+--------------------------+

mysql> create table foo (s varchar(128));
mysql> insert into foo values ('Lowercase table name foo');

mysql> create table Foo (s varchar(128));
mysql> insert into Foo values ('Mixed-case table name Foo');

mysql> create table FOO (s varchar(128));
mysql> insert into FOO values ('Uppercase table name FOO');

mysql> select * from foo;
+--------------------------+
| s                        |
+--------------------------+
| Lowercase table name foo |
+--------------------------+

mysql> select * from Foo;
+--------------------------+
| s                         |
+--------------------------+
| Mixed-case table name Foo |
+--------------------------+

mysql> select * from FOO;
+--------------------------+
| s                        |
+--------------------------+
| Uppercase table name FOO |
```

```
+--------------------------+
```

Next, we associate the DB parameter group with the cluster to set the `lower_case_table_names` parameter to 1. This change only takes effect after each DB instance is rebooted.

```
$ aws rds modify-db-cluster --db-cluster-identifier cluster-2393 \
  --db-cluster-parameter-group-name lower-case-table-names-1
{
  "DBClusterIdentifier": "cluster-2393",
  "DBClusterParameterGroup": "lower-case-table-names-1",
  "Engine": "aurora-mysql",
  "EngineVersion": "5.7.mysql_aurora.2.10.0"
}
```

The first reboot we do is for the writer DB instance. Then we wait for the instance to become available again. At that point, we connect to the writer endpoint and verify that the writer instance has the changed parameter value. The `SHOW TABLES` command confirms that the database contains the three different tables. However, queries that refer to tables named `foo`, `Foo`, or `F00` all access the table whose name is all-lowercase, `foo`.

```
# Rebooting the writer instance
$ aws rds reboot-db-instance --db-instance-identifier instance-9404
$ aws rds wait db-instance-available --db-instance-id instance-9404
```

Now, queries using the cluster endpoint show the effects of the parameter change. Whether the table name in the query is uppercase, lowercase, or mixed case, the SQL statement accesses the table whose name is all lowercase.

```
mysql> select @@lower_case_table_names;
+--------------------------+
| @@lower_case_table_names |
+--------------------------+
|                        1 |
+--------------------------+

mysql> use lctn;
mysql> show tables;
+----------------+
| Tables_in_lctn |
+----------------+
```

```
| FOO            |
| Foo            |
| foo            |
+----------------+

mysql> select * from foo;
+--------------------------+
| s                        |
+--------------------------+
| Lowercase table name foo |
+--------------------------+

mysql> select * from Foo;
+--------------------------+
| s                        |
+--------------------------+
| Lowercase table name foo |
+--------------------------+

mysql> select * from FOO;
+--------------------------+
| s                        |
+--------------------------+
| Lowercase table name foo |
+--------------------------+
```

The next example shows the same queries as the previous one. In this case, the queries use the reader endpoint and run on one of the reader DB instances. Those instances haven't been rebooted yet. Thus, they still have the original setting for the `lower_case_table_names` parameter. That means that queries can access each of the `foo`, `Foo`, and `F00` tables.

```
mysql> select @@lower_case_table_names;
+--------------------------+
| @@lower_case_table_names |
+--------------------------+
|                        0 |
+--------------------------+

mysql> use lctn;

mysql> select * from foo;
+--------------------------+
| s                        |
```

```
+--------------------------+
| Lowercase table name foo |
+--------------------------+

mysql> select * from Foo;
+---------------------------+
| s                          |
+---------------------------+
| Mixed-case table name Foo |
+---------------------------+

mysql> select * from FOO;
+--------------------------+
| s                         |
+--------------------------+
| Uppercase table name FOO |
+--------------------------+
```

Next, we reboot one of the reader instances and wait for it to become available again.

```
$ aws rds reboot-db-instance --db-instance-identifier instance-2470
{
  "DBInstanceIdentifier": "instance-2470",
  "DBInstanceStatus": "rebooting"
}
$ aws rds wait db-instance-available --db-instance-id instance-2470
```

While connected to the instance endpoint for `instance-2470`, a query shows that the new parameter is in effect.

```
mysql> select @@lower_case_table_names;
+--------------------------+
| @@lower_case_table_names |
+--------------------------+
|                        1 |
+--------------------------+
```

At this point, the two reader instances in the cluster are running with different `lower_case_table_names` settings. Thus, any connection to the reader endpoint of the cluster uses a value for this setting that's unpredictable. It's important to immediately reboot the other reader instance so that they both have consistent settings.

```
$ aws rds reboot-db-instance --db-instance-identifier instance-5138
{
  "DBInstanceIdentifier": "instance-5138",
  "DBInstanceStatus": "rebooting"
}
$ aws rds wait db-instance-available --db-instance-id instance-5138
```

The following example confirms that all the reader instances have the same setting for the `lower_case_table_names` parameter. The commands check the `lower_case_table_names` setting value on each reader instance. Then the same command using the reader endpoint demonstrates that each connection to the reader endpoint uses one of the reader instances, but which one isn't predictable.

```
# Check lower_case_table_names setting on each reader instance.

$ mysql -h instance-5138.a12345.us-east-1.rds.amazonaws.com \
  -u my-user -p -e 'select @@aurora_server_id, @@lower_case_table_names'
+--------------------------+--------------------------+
| @@aurora_server_id       | @@lower_case_table_names |
+--------------------------+--------------------------+
| instance-5138            |                        1 |
+--------------------------+--------------------------+

$ mysql -h instance-2470.a12345.us-east-1.rds.amazonaws.com \
  -u my-user -p -e 'select @@aurora_server_id, @@lower_case_table_names'
+--------------------------+--------------------------+
| @@aurora_server_id       | @@lower_case_table_names |
+--------------------------+--------------------------+
| instance-2470            |                        1 |
+--------------------------+--------------------------+

# Check lower_case_table_names setting on the reader endpoint of the cluster.

$ mysql -h cluster-2393.cluster-ro-a12345.us-east-1.rds.amazonaws.com \
  -u my-user -p -e 'select @@aurora_server_id, @@lower_case_table_names'
+--------------------------+--------------------------+
| @@aurora_server_id       | @@lower_case_table_names |
+--------------------------+--------------------------+
| instance-5138            |                        1 |
+--------------------------+--------------------------+

# Run query on writer instance
```

```
$ mysql -h cluster-2393.cluster-a12345.us-east-1.rds.amazonaws.com \
  -u my-user -p -e 'select @@aurora_server_id, @@lower_case_table_names'
+--------------------------+--------------------------+
| @@aurora_server_id       | @@lower_case_table_names |
+--------------------------+--------------------------+
| instance-9404            |                        1 |
+--------------------------+--------------------------+
```

With the parameter change applied everywhere, we can see the effect of setting `lower_case_table_names=1`. Whether the table is referred to as `foo`, `Foo`, or `F00` the query converts the name to `foo` and accesses the same table in each case.

```
mysql> use lctn;

mysql> select * from foo;
+--------------------------+
| s                        |
+--------------------------+
| Lowercase table name foo |
+--------------------------+

mysql> select * from Foo;
+--------------------------+
| s                        |
+--------------------------+
| Lowercase table name foo |
+--------------------------+

mysql> select * from F00;
+--------------------------+
| s                        |
+--------------------------+
| Lowercase table name foo |
+--------------------------+
```

Failing over an Amazon Aurora DB cluster

You can perform a manual failover of an Aurora DB cluster, for example, when you want to replace a provisioned writer DB instance with an Aurora serverless writer instance.

Aurora fails over to a new primary DB instance in one of two ways:

- By promoting an existing reader DB instance to the new primary instance
- By creating a new primary instance

If the DB cluster has one or more reader instances, then a reader is promoted to the primary instance during a failure event. To increase the availability of your DB cluster, we recommend that you create at least one or more reader instances in two or more different Availability Zones. For more information on the failover mechanism, see Fault tolerance for an Aurora DB cluster.

You can use the Amazon Web Services Management Console, Amazon CLI, or RDS API to perform a manual failover.

Console

To fail over a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then select a DB instance in the DB cluster that you want to fail over.
3. For **Actions**, choose **Failover**.

   The confirmation page appears.
4. Choose **Failover**.

   The **Databases** page shows that the DB cluster status is **Failing-over**. The status returns to **Available** when the failover is completed, and the roles for the new and former primary DB instances are displayed.

Amazon CLI

To fail over a DB cluster using the Amazon CLI, call the failover-db-cluster command. Specify the following parameters:

- `--db-cluster-identifier` – The DB cluster that you want to fail over.
- `--target-db-instance-identifier` – The name of the DB instance to promote to the primary DB instance.

Example

For Linux, macOS, or Unix:

```
aws rds failover-db-cluster \
    --db-cluster-identifier mydbcluster \
    --target-db-instance-identifier mydbcluster-instance-2
```

For Windows:

```
aws rds failover-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --target-db-instance-identifier mydbcluster-instance-2
```

RDS API

To modify a DB cluster using the Amazon RDS API, call the FailoverDBCluster operation. Specify the following parameters:

- DBClusterIdentifier
- TargetDBInstanceIdentifier

Deleting Aurora DB clusters and DB instances

You can delete an Aurora DB cluster when you no longer need it. Deleting the cluster removes the cluster volume containing all your data. Before deleting the cluster, you can save a snapshot of your data. You can restore the snapshot later to create a new cluster containing the same data.

You can also delete DB instances from a cluster while preserving the cluster itself and the data that it contains. Deleting DB instances can help you reduce your charges if the cluster isn't busy, or you don't need the computation capacity of multiple DB instances.

Topics

- Deleting an Aurora DB cluster
- Deletion protection for Aurora clusters
- Deleting a stopped Aurora cluster
- Deleting Aurora MySQL clusters that are read replicas
- The final snapshot when deleting a cluster
- Deleting a DB instance from an Aurora DB cluster

Deleting an Aurora DB cluster

Aurora doesn't provide a single-step method to delete a DB cluster. This design choice is intended to prevent you from accidentally losing data or taking your application offline. Aurora applications are typically mission-critical and require high availability. Thus, Aurora makes it easy to scale the capacity of the cluster up and down by adding and removing DB instances. Removing the DB cluster itself requires you to make a separate deletion.

Use the following general procedure to remove all the DB instances from a cluster and then delete the cluster itself.

1. Delete any reader instances in the cluster. Use the procedure in Deleting a DB instance from an Aurora DB cluster.

   If the cluster has any reader instances, deleting one of the instances only reduces the computation capacity of the cluster. Deleting the reader instances first ensures that the cluster remains available throughout the procedure and doesn't perform unnecessary failover operations.

2. Delete the writer instance from the cluster. Again, use the procedure in Deleting a DB instance from an Aurora DB cluster.

   When you delete the DB instances, the cluster and its associated cluster volume remain even after you delete all the DB instances.

3. Delete the DB cluster.

   - **Amazon Web Services Management Console** – Choose the cluster, then choose **Delete** from the **Actions** menu. You can choose the following options to preserve the data from the cluster in case you need it later:
     - Create a final snapshot of the cluster volume. The default setting is to create a final snapshot.
     - Retain automated backups. The default setting is not to retain automated backups.

     Aurora also requires you to confirm that you intend to delete the cluster.
   - **CLI and API** – Call the `delete-db-cluster` CLI command or `DeleteDBCluster` API operation. You can choose the following options to preserve the data from the cluster in case you need it later:
     - Create a final snapshot of the cluster volume.
     - Retain automated backups.

Topics

- Deleting an empty Aurora cluster
- Deleting an Aurora cluster with a single DB instance
- Deleting an Aurora cluster with multiple DB instances

Deleting an empty Aurora cluster

You can delete an empty DB cluster using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API.

> **Tip**
>
> You can keep a cluster with no DB instances to preserve your data without incurring CPU charges for the cluster. You can quickly start using the cluster again by creating one or more new DB instances for the cluster. However, you can only add new DB instances by

using the Amazon CLI or the RDS API. You can't add new DB instances by using the Amazon RDS console. You can perform Aurora-specific administrative operations on the cluster while it doesn't have any associated DB instances. You just can't access the data or perform any operations that require connecting to a DB instance.

Console

To delete a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB cluster that you want to delete.
3. For **Actions**, choose **Delete**.
4. To create a final DB snapshot for the DB cluster, choose **Create final snapshot?**. This is the default setting.
5. If you chose to create a final snapshot, enter the **Final snapshot name**.
6. To retain automated backups, choose **Retain automated backups**. This is not the default setting.
7. Enter **`delete me`** in the box.
8. Choose **Delete**.

CLI

To delete an empty Aurora DB cluster by using the Amazon CLI, call the delete-db-cluster command.

Suppose that the empty cluster `deleteme-zero-instances` was only used for development and testing and doesn't contain any important data. In that case, you don't need to preserve a snapshot of the cluster volume when you delete the cluster. The following example demonstrates that a cluster doesn't contain any DB instances, and then deletes the empty cluster without creating a final snapshot or retaining automated backups.

```
$ aws rds describe-db-clusters --db-cluster-identifier deleteme-zero-instances --output
 text \
```

```
  --query '*[].["Cluster:",DBClusterIdentifier,DBClusterMembers[*].
["Instance:",DBInstanceIdentifier,IsClusterWriter]]
Cluster:        deleteme-zero-instances

$ aws rds delete-db-cluster --db-cluster-identifier deleteme-zero-instances \
  --skip-final-snapshot \
  --delete-automated-backups
{
  "DBClusterIdentifier": "deleteme-zero-instances",
  "Status": "available",
  "Engine": "aurora-mysql"
}
```

RDS API

To delete an empty Aurora DB cluster by using the Amazon RDS API, call the DeleteDBCluster operation.

Deleting an Aurora cluster with a single DB instance

You can delete the last DB instance, even if the DB cluster has deletion protection enabled. In this case, the DB cluster itself still exists and your data is preserved. You can access the data again by attaching a new DB instance to the cluster.

The following example shows how the `delete-db-cluster` command doesn't work when the cluster still has any associated DB instances. This cluster has a single writer DB instance. When we examine the DB instances in the cluster, we check the `IsClusterWriter` attribute of each one. The cluster could have zero or one writer DB instance. A value of `true` signifies a writer DB instance. A value of `false` signifies a reader DB instance. The cluster could have zero, one, or many reader DB instances. In this case, we delete the writer DB instance using the `delete-db-instance` command. As soon as the DB instance goes into `deleting` state, we can delete the cluster also. For this example also, suppose that the cluster doesn't contain any data worth preserving. Therefore, we don't create a snapshot of the cluster volume or retain automated backups.

```
$ aws rds delete-db-cluster --db-cluster-identifier deleteme-writer-only --skip-final-
snapshot
An error occurred (InvalidDBClusterStateFault) when calling the DeleteDBCluster
 operation:
  Cluster cannot be deleted, it still contains DB instances in non-deleting state.
```

```
$ aws rds describe-db-clusters --db-cluster-identifier deleteme-writer-only \
  --query '*[].[DBClusterIdentifier,Status,DBClusterMembers[*].
[DBInstanceIdentifier,IsClusterWriter]]'
[
    [
        "deleteme-writer-only",
        "available",
        [
            [
                "instance-2130",
                true
            ]
        ]
    ]
]

$ aws rds delete-db-instance --db-instance-identifier instance-2130
{
  "DBInstanceIdentifier": "instance-2130",
  "DBInstanceStatus": "deleting",
  "Engine": "aurora-mysql"
}

$ aws rds delete-db-cluster --db-cluster-identifier deleteme-writer-only \
  --skip-final-snapshot \
  --delete-automated-backups
{
  "DBClusterIdentifier": "deleteme-writer-only",
  "Status": "available",
  "Engine": "aurora-mysql"
}
```

Deleting an Aurora cluster with multiple DB instances

If your cluster contains multiple DB instances, typically there is a single writer instance and one or more reader instances. The reader instances help with high availability, by being on standby to take over if the writer instance encounters a problem. You can also use reader instances to scale the cluster up to handle a read-intensive workload without adding overhead to the writer instance.

To delete a cluster with multiple reader DB instances, you delete the reader instances first and then the writer instance. Deleting the writer instance leaves the cluster and its data in place. You delete the cluster through a separate action.

- For the procedure to delete an Aurora DB instance, see Deleting a DB instance from an Aurora DB cluster.
- For the procedure to delete the writer DB instance in an Aurora cluster, see Deleting an Aurora cluster with a single DB instance.
- For the procedure to delete an empty Aurora cluster, see Deleting an empty Aurora cluster.

This CLI example shows how to delete a cluster containing both a writer DB instance and a single reader DB instance. The `describe-db-clusters` output shows that `instance-7384` is the writer instance and `instance-1039` is the reader instance. The example deletes the reader instance first, because deleting the writer instance while a reader instance still existed would cause a failover operation. It doesn't make sense to promote the reader instance to a writer if you plan to delete that instance also. Again, suppose that these `db.t2.small` instances are only used for development and testing, and so the delete operation skips the final snapshot and doesn't retain automated backups..

```
$ aws rds delete-db-cluster --db-cluster-identifier deleteme-writer-and-reader --skip-
final-snapshot

An error occurred (InvalidDBClusterStateFault) when calling the DeleteDBCluster
 operation:
  Cluster cannot be deleted, it still contains DB instances in non-deleting state.

$ aws rds describe-db-clusters --db-cluster-identifier deleteme-writer-and-reader --
output text \
  --query '*[].["Cluster:",DBClusterIdentifier,DBClusterMembers[*].
["Instance:",DBInstanceIdentifier,IsClusterWriter]]
Cluster:        deleteme-writer-and-reader
Instance:       instance-1039  False
Instance:       instance-7384   True

$ aws rds delete-db-instance --db-instance-identifier instance-1039
{
  "DBInstanceIdentifier": "instance-1039",
  "DBInstanceStatus": "deleting",
  "Engine": "aurora-mysql"
}

$ aws rds delete-db-instance --db-instance-identifier instance-7384
{
  "DBInstanceIdentifier": "instance-7384",
```

```
  "DBInstanceStatus": "deleting",
  "Engine": "aurora-mysql"
}

$ aws rds delete-db-cluster --db-cluster-identifier deleteme-writer-and-reader \
  --skip-final-snapshot \
  --delete-automated-backups
{
  "DBClusterIdentifier": "deleteme-writer-and-reader",
  "Status": "available",
  "Engine": "aurora-mysql"
}
```

The following example shows how to delete a DB cluster containing a writer DB instance and multiple reader DB instances. It uses concise output from the `describe-db-clusters` command to get a report of the writer and reader instances. Again, we delete all reader DB instances before deleting the writer DB instance. It doesn't matter what order we delete the reader DB instances in.

Suppose that this cluster with several DB instances does contain data worth preserving. Thus, the `delete-db-cluster` command in this example includes the `--no-skip-final-snapshot` and `--final-db-snapshot-identifier` parameters to specify the details of the snapshot to create. It also includes the `--no-delete-automated-backups` parameter to retain automated backups.

```
$ aws rds describe-db-clusters --db-cluster-identifier deleteme-multiple-readers --
output text \
  --query '*[].["Cluster:",DBClusterIdentifier,DBClusterMembers[*].
["Instance:",DBInstanceIdentifier,IsClusterWriter]]
Cluster:        deleteme-multiple-readers
Instance:       instance-1010   False
Instance:       instance-5410   False
Instance:       instance-9948   False
Instance:       instance-8451   True

$ aws rds delete-db-instance --db-instance-identifier instance-1010
{
  "DBInstanceIdentifier": "instance-1010",
  "DBInstanceStatus": "deleting",
  "Engine": "aurora-mysql"
}

$ aws rds delete-db-instance --db-instance-identifier instance-5410
```

```
{
  "DBInstanceIdentifier": "instance-5410",
  "DBInstanceStatus": "deleting",
  "Engine": "aurora-mysql"
}

$ aws rds delete-db-instance --db-instance-identifier instance-9948
{
  "DBInstanceIdentifier": "instance-9948",
  "DBInstanceStatus": "deleting",
  "Engine": "aurora-mysql"
}

$ aws rds delete-db-instance --db-instance-identifier instance-8451
{
  "DBInstanceIdentifier": "instance-8451",
  "DBInstanceStatus": "deleting",
  "Engine": "aurora-mysql"
}

$ aws rds delete-db-cluster --db-cluster-identifier deleteme-multiple-readers \
  --no-delete-automated-backups \
  --no-skip-final-snapshot \
  --final-db-snapshot-identifier deleteme-multiple-readers-final-snapshot
{
  "DBClusterIdentifier": "deleteme-multiple-readers",
  "Status": "available",
  "Engine": "aurora-mysql"
}
```

The following example shows how to confirm that Aurora created the requested snapshot. You can request details for the specific snapshot by specifying its identifier `deleteme-multiple-readers-final-snapshot`. You can also get a report of all snapshots for the cluster that was deleted by specifying the cluster identifier `deleteme-multiple-readers`. Both of those commands return information about the same snapshot.

```
$ aws rds describe-db-cluster-snapshots \
  --db-cluster-snapshot-identifier deleteme-multiple-readers-final-snapshot
{
    "DBClusterSnapshots": [
        {
            "AvailabilityZones": [],
            "DBClusterSnapshotIdentifier": "deleteme-multiple-readers-final-snapshot",
```

```
            "DBClusterIdentifier": "deleteme-multiple-readers",
            "SnapshotCreateTime": "11T01:40:07.354000+00:00",
            "Engine": "aurora-mysql",
...

$ aws rds describe-db-cluster-snapshots --db-cluster-identifier deleteme-multiple-
readers
{
    "DBClusterSnapshots": [
        {
            "AvailabilityZones": [],
            "DBClusterSnapshotIdentifier": "deleteme-multiple-readers-final-snapshot",
            "DBClusterIdentifier": "deleteme-multiple-readers",
            "SnapshotCreateTime": "11T01:40:07.354000+00:00",
            "Engine": "aurora-mysql",
...
```

Deletion protection for Aurora clusters

You can't delete clusters that have deletion protection enabled. You can delete DB instances within the cluster, but not the cluster itself. That way, the cluster volume containing all your data is safe from accidental deletion. Aurora enforces deletion protection for a DB cluster whether you try to delete the cluster using the console, the Amazon CLI, or the RDS API.

Deletion protection is enabled by default when you create a production DB cluster using the Amazon Web Services Management Console. However, deletion protection is disabled by default if you create a cluster using the Amazon CLI or API. Enabling or disabling deletion protection doesn't cause an outage. To be able to delete the cluster, modify the cluster and disable deletion protection. For more information about turning deletion protection on and off, see Modifying the DB cluster by using the console, CLI, and API.

Tip

Even if all the DB instances are deleted, you can access the data by creating a new DB instance in the cluster.

Deleting a stopped Aurora cluster

You can't delete a cluster if it's in the `stopped` state. In this case, start the cluster before deleting it. For more information, see Starting an Aurora DB cluster.

Deleting Aurora MySQL clusters that are read replicas

For Aurora MySQL, you can't delete a DB instance in a DB cluster if both of the following conditions are true:

- The DB cluster is a read replica of another Aurora DB cluster.
- The DB instance is the only instance in the DB cluster.

To delete a DB instance in this case, first promote the DB cluster so that it's no longer a read replica. After the promotion completes, you can delete the final DB instance in the DB cluster. For more information, see Replicating Amazon Aurora MySQL DB clusters across Amazon Web Services Regions.

The final snapshot when deleting a cluster

Throughout this section, the examples show how you can choose whether to take a final snapshot when you delete an Aurora cluster. If you choose to take a final snapshot but the name you specify matches an existing snapshot, the operation stops with an error. In this case, examine the snapshot details to confirm if it represents your current detail or if it is an older snapshot. If the existing snapshot doesn't have the latest data that you want to preserve, rename the snapshot and try again, or specify a different name for the **final snapshot** parameter.

Deleting a DB instance from an Aurora DB cluster

You can delete a DB instance from an Aurora DB cluster as part of the process of deleting the entire cluster. If your cluster contains a certain number of DB instances, then deleting the cluster requires deleting each of those DB instances. You can also delete one or more reader instances from a cluster while leaving the cluster running. You might do so to reduce compute capacity and associated charges if your cluster isn't busy.

To delete a DB instance, you specify the name of the instance.

You can delete a DB instance using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

> **Note**
>
> When an Aurora Replica is deleted, its instance endpoint is removed immediately, and the Aurora Replica is removed from the reader endpoint. If there are statements running on the Aurora Replica that is being deleted, there is a three-minute grace period. Existing statements can finish during the grace period. When the grace period ends, the Aurora Replica is shut down and deleted.

For Aurora DB clusters, deleting a DB instance doesn't necessarily delete the entire cluster. You can delete a DB instance in an Aurora cluster to reduce compute capacity and associated charges when the cluster isn't busy. For information about the special circumstances for Aurora clusters that have one DB instance or zero DB instances, see Deleting an Aurora cluster with a single DB instance and Deleting an empty Aurora cluster.

> **Note**
>
> You can't delete a DB cluster when deletion protection is enabled for it. For more information, see Deletion protection for Aurora clusters.
> You can disable deletion protection by modifying the DB cluster. For more information, see Modifying an Amazon Aurora DB cluster.

Console

To delete a DB instance in a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB instance that you want to delete.
3. For **Actions**, choose **Delete**.
4. Enter **`delete me`** in the box.
5. Choose **Delete**.

Amazon CLI

To delete a DB instance by using the Amazon CLI, call the delete-db-instance command and specify the `--db-instance-identifier` value.

Example

For Linux, macOS, or Unix:

```
aws rds delete-db-instance \
    --db-instance-identifier mydbinstance
```

For Windows:

```
aws rds delete-db-instance ^
    --db-instance-identifier mydbinstance
```

RDS API

To delete a DB instance by using the Amazon RDS API, call the DeleteDBInstance operation and specify the `DBInstanceIdentifier` parameter.

> **Note**
>
> When the status for a DB instance is `deleting`, its CA certificate value doesn't appear in the RDS console or in output for Amazon CLI commands or RDS API operations. For more information about CA certificates, see Using SSL/TLS to encrypt a connection to a DB cluster.

Tagging Amazon Aurora andAmazon RDS resources

An Amazon RDS *tag* is a name-value pair that you define and associate with an Amazon RDS resource such as a DB instance or DB snapshot. The name is referred to as the *key*. Optionally, you can supply a value for the key.

You can use the Amazon Web Services Management Console, the Amazon CLI, or the Amazon RDS API to add, list, and delete tags on Amazon RDS resources. When using the CLI or API, make sure to provide the Amazon Resource Name (ARN) for the RDS resource to work with. For more information about constructing an ARN, see Constructing an ARN for Amazon RDS.

You can use tags to add metadata to your Aurora and Amazon RDS resources. You can use the tags to add your own notations about database instances, snapshots, Aurora clusters, and so on. Doing so can help you to document your Aurora and Amazon RDS resources. You can also use the tags with automated maintenance procedures.

In particular, you can use these tags with IAM policies. You can use them to manage access to Aurora and Amazon RDS resources and to control what actions can be applied to those resources. You can also use these tags to track costs by grouping expenses for similarly tagged resources.

You can tag the following Aurora and Amazon RDS resources:

- DB instances
- DB clusters
- Aurora global clusters
- DB cluster endpoints
- Read replicas
- DB snapshots
- DB cluster snapshots
- Reserved DB instances
- Event subscriptions
- DB option groups
- DB parameter groups
- DB cluster parameter groups
- DB subnet groups

- RDS Proxies
- RDS Proxy endpoints
- Blue/green deployments
- Zero-ETL integrations
- Automated backups
- Cluster automated backups

> **Note**
>
> When you tag a DB instance, Aurora automatically applies those tags to the associated Performance Insights resources. Currently, you can't tag RDS Proxies and RDS Proxy endpoints by using the Amazon Web Services Management Console.

Topics

- Why use Amazon RDS resource tags?
- How Amazon RDS resource tags work
- Best practices for tagging Amazon RDS resources
- Copying tags to DB cluster snapshots
- Tagging automated backup resources
- Adding and deleting tags in Amazon RDS
- Tutorial: Use tags to specify which Aurora DB clusters to stop

Why use Amazon RDS resource tags?

You can use tags to do the following:

- Categorize your RDS resources by application, project, department, environment, and so on. For example, you could use a tag key to define a category, where the tag value is an item in this category. You might create the tag `environment=prod`. Or you might define a tag key of `project` and a tag value of `Salix`, which indicates that an Amazon RDS resource is assigned to the Salix project.
- Automate resource management tasks. For example, you could create a maintenance window for instances tagged `environment=prod` that differs from the window for instances tagged

`environment=test`. You could also configure automatic DB snapshots for instances tagged `environment=prod`.

- Control access to RDS resources within an IAM policy. You can do this by using the global `aws:ResourceTag/tag-key` condition key. For example, a policy might allow only users in the `DBAdmin` group to modify DB instances tagged with `environment=prod`. For information about managing access to tagged resources with IAM policies, see Identity and access management for Amazon Aurora and Controlling access to Amazon resources in the *Amazon Identity and Access Management User Guide*.
- Monitor resources based on a tag. For example, you can create an Amazon CloudWatch dashboard for DB instances tagged with `environment=prod`.
- Track costs by grouping expenses for similarly tagged resources. For example, if you tag RDS resources associated with the Salix project with `project=Salix`, you can generate cost reports for and allocate expenses to this project. For more information, see How Amazon billing works with tags in Amazon RDS.

How Amazon RDS resource tags work

Amazon doesn't apply any semantic meaning to your tags. Tags are interpreted strictly as character strings.

Topics

- Tag sets in Amazon RDS
- Tag structure in Amazon RDS
- Amazon RDS resources eligible for tagging
- How Amazon billing works with tags in Amazon RDS

Tag sets in Amazon RDS

Every Amazon RDS resource has a container called a *tag set*. The container includes all the tags that are assigned to the resource. A resource has exactly one tag set.

A tag set contains 0—50 tags. If you add a tag to an RDS resource with the same key as an existing resource tag, the new value overwrites the old.

Tag structure in Amazon RDS

The structure of an RDS tag is as follows:

Tag key

The key is the required name of the tag. The string value must be 1—128 Unicode characters in length and cannot be prefixed with `aws:` or `rds:`. The string can contain only the set of Unicode letters, digits, whitespace, _, `.`, `:`, `/`, `=`, `+`, `-`, and `@`. The Java regex is `"^([\\p{L}\\p{Z}\\p{N}_.:/=+\\-@]*)$"`. Tag keys are case-sensitive. Thus, the keys `project` and `Project` are distinct.

A key is unique to a tag set. For example, you cannot have a key-pair in a tag set with the key the same but with different values, such as `project=Trinity` and `project=Xanadu`.

Tag value

The value is an optional string value of the tag. The string value must be 1—256 Unicode characters in length. The string can contain only the set of Unicode letters, digits, whitespace, _, `.`, `:`, `/`, `=`, `+`, `-`, and `@`. The Java regex is `"^([\\p{L}\\p{Z}\\p{N}_.:/=+\\-@]*)$"`. Tag values are case-sensitive. Thus, the values `prod` and `Prod` are distinct.

Values don't need to be unique in a tag set and can be null. For example, you can have a key-value pair in a tag set of `project=Trinity` and `cost-center=Trinity`.

Amazon RDS resources eligible for tagging

You can tag the following Amazon RDS resources:

- DB instances
- DB clusters
- DB cluster endpoints
- Read replicas
- DB snapshots
- DB cluster snapshots
- Reserved DB instances
- Event subscriptions

- DB option groups
- DB parameter groups
- DB cluster parameter groups
- DB subnet groups
- RDS Proxies
- RDS Proxy endpoints

> **Note**
>
> Currently, you can't tag RDS Proxies and RDS Proxy endpoints by using the Amazon Web Services Management Console.

- Blue/green deployments
- Zero-ETL integrations (preview)
- Automated backups
- Cluster automated backups

How Amazon billing works with tags in Amazon RDS

Use tags to organize your Amazon bill to reflect your own cost structure. To do this, sign up to get your Amazon Web Services account bill with tag key values included. Then, to see the cost of combined resources, organize your billing information according to resources with the same tag key values. For example, you can tag several resources with a specific application name, and then organize your billing information to see the total cost of that application across several services. For more information, see Using Cost Allocation Tags in the *Amazon Billing User Guide*.

How cost allocation tags work with DB clustersnapshots

You can add a tag to a DB cluster snapshot. However, your bill won't reflect this grouping. For cost allocation tags to apply to DB cluster snapshots, the following conditions must be met:

- The tags must be attached to the parent DB instance.
- The parent DB instance must exist in the same Amazon Web Services account as the DB cluster snapshot.
- The parent DB instance must exist in the same Amazon Web Services Region as the DB cluster snapshot.

DB cluster snapshots are considered orphaned if they don't exist in the same Region as the parent DB instance, or if the parent DB instance is deleted. Orphaned DB snapshots don't support cost allocation tags. Costs for orphaned snapshots are aggregated in a single untagged line item. Cross-account DB cluster snapshots aren't considered orphaned when the following conditions are met:

- They exist in the same Region as the parent DB instance.
- The parent DB instance is owned by the source account.

> **Note**
>
> If the parent DB instance is owned by a different account, cost allocation tags don't apply to cross-account snapshots in the destination account.

Best practices for tagging Amazon RDS resources

When you use tags, we recommend that you adhere to the following best practices:

- Document conventions for tag use that are followed by all teams in your organization. In particular, ensure the names are both descriptive and consistent. For example, standardize on the format `environment:prod` rather than tagging some resources with `env:production`.

  > **Important**
  >
  > Do not store personally identifiable information (PII) or other confidential or sensitive information in tags.

- Automate tagging to ensure consistency. For example, you can use the following techniques:
  - Include tags in an Amazon CloudFormation template. When you create resources with the template, the resources are tagged automatically.
  - Define and apply tags using Amazon Lambda functions.
  - Create an SSM document that includes steps to add tags to your RDS resources.
- Use tags only when necessary. You can add up to 50 tags for a single RDS resource, but a best practice is to avoid unnecessary tag proliferation and complexity.
- Review tags periodically for relevance and accuracy. Remove or modify outdated tags as needed.
- Consider creating tags with the Amazon Tag Editor in the Amazon Web Services Management Console. You can use the Tag Editor to add tags to multiple supported Amazon resources,

including RDS resources, at the same time. For more information, see Tag Editor in the *Amazon Resource Groups User Guide*.

Copying tags to DB cluster snapshots

When you create or restore a DB cluster, you can specify that the tags from the cluster are copied to snapshots of the DB cluster. Copying tags ensures that the metadata for the DB snapshots matches that of the source DB cluster. It also ensures any access policies for the DB snapshot also match those of the source DB cluster. Tags are not copied by default.

You can specify that tags are copied to DB snapshots for the following actions:

- Creating a DB cluster
- Restoring a DB cluster
- Creating a read replica
- Copying a DB cluster snapshot

Note

In some cases, you might include a value for the `--tags` parameter of the create-db-snapshot Amazon CLI command. Or you might supply at least one tag to the CreateDBSnapshot API operation. In these cases, RDS doesn't copy tags from the source DB instance to the new DB snapshot. This functionality applies even if the source DB instance has the `--copy-tags-to-snapshot` (`CopyTagsToSnapshot`) option turned on.
If you take this approach, you can create a copy of a DB instance from a DB snapshot. This approach avoids adding tags that don't apply to the new DB instance. You create your DB snapshot using the Amazon CLI `create-db-snapshot` command (or the `CreateDBSnapshot` RDS API operation). After you create your DB snapshot, you can add tags as described later in this topic.

Tagging automated backup resources

Automated backup resources are created when you set backup retention period value from 0 to greater than 0. You can tag instance or cluster automated backup resources during creation using the `--tag-specifications` parameter.

Tag-Specifications Parameter

APIs that support the `--tag-specifications` request parameter (like create-db-instance, restore-db-instance-from-db-snapshot, create-db-cluster, and so on) can tag automated backups (Resource Type: `auto-backup` or `cluster-auto-backup`) during creation.

Tagging cluster automated backups

Use `--tag-specifications` with `ResourceType=cluster-auto-backup` when creating DB clusters that have automated backups enabled.

> **Note**
>
> - Automated backup tags are independent of source DB instance tags, DB cluster tags, or DB snapshot tags.

Adding and deleting tags in Amazon RDS

You can do the following:

- Create tags when you create a resource, for example, when you run the Amazon CLI command `create-db-instance`.
- Add tags to an existing resource using the command `add-tags-to-resource`.
- List tags associated with a specific resource using the command `list-tags-for-resource`.
- Update tags using the command `add-tags-to-resource`.
- Remove tags from a resource using the command `remove-tags-from-resource`.

The following procedures show how you can perform typical tagging operations on resources related to DB instances and Aurora DB clusters. Note that tags are cached for authorization purposes. For this reason, when you add or update tags on Amazon RDS resources, several minutes can pass before the modifications are available.

Console


The process to tag an Amazon RDS resource is similar for all resources. The following procedure shows how to tag an Amazon RDS DB instance.

To add a tag to a DB instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.

   > **Note**
   >
   > To filter the list of DB instances in the **Databases** pane, enter a text string for **Filter databases**. Only DB instances that contain the string appear.

3. Choose the name of the DB instance that you want to tag to show its details.
4. In the details section, scroll down to the **Tags** section.
5. Choose **Add**. The **Add tags** window appears.

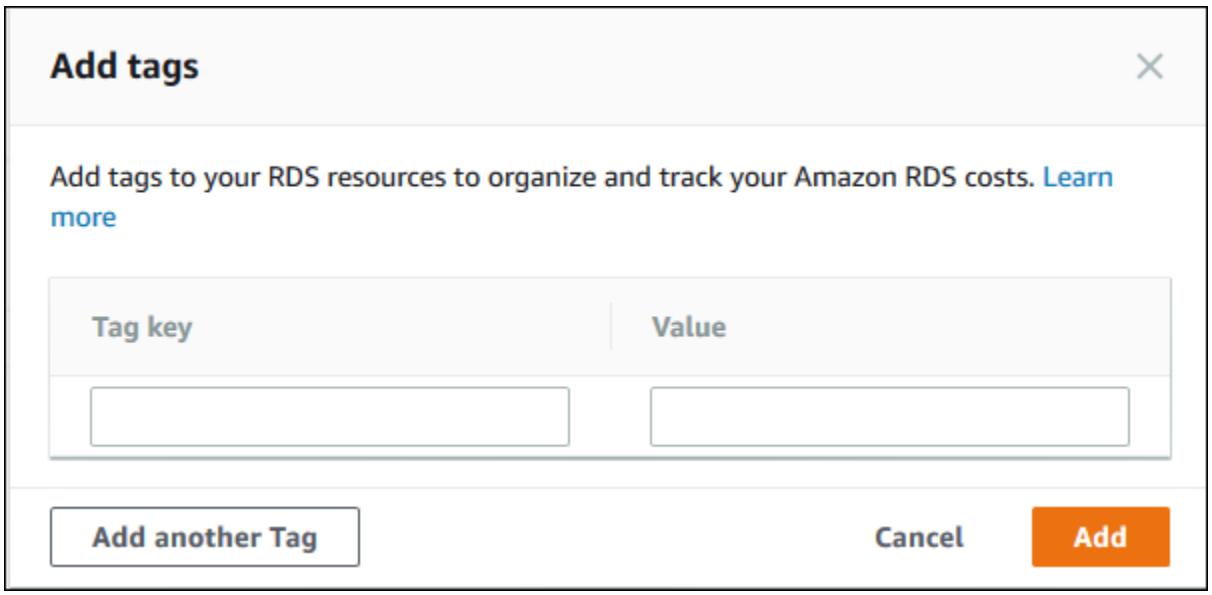

6. Enter a value for **Tag key** and **Value**.
7. To add another tag, you can choose **Add another Tag** and enter a value for its **Tag key** and **Value**.

   Repeat this step as many times as necessary.


8. Choose **Add**.

To delete a tag from a DB instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.

> **Note**
>
> To filter the list of DB instances in the **Databases** pane, enter a text string in the **Filter databases** box. Only DB instances that contain the string appear.

3. Choose the name of the DB instance to show its details.
4. In the details section, scroll down to the **Tags** section.
5. Choose the tag you want to delete.

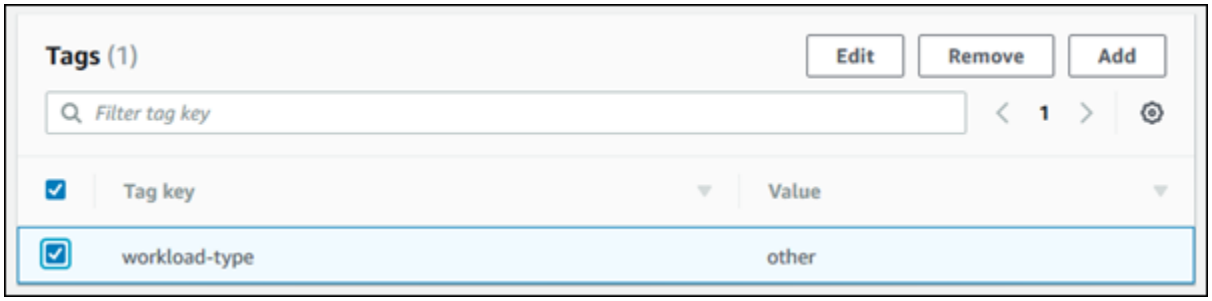

6. Choose **Delete**, and then choose **Delete** in the **Delete tags** window.

Amazon CLI

You can add, list, or remove tags for a DB instance using the Amazon CLI.

- To add one or more tags to an Amazon RDS resource, use the Amazon CLI command `add-tags-to-resource`.
- To list the tags on an Amazon RDS resource, use the Amazon CLI command `list-tags-for-resource`.
- To remove one or more tags from an Amazon RDS resource, use the Amazon CLI command `remove-tags-from-resource`.

To learn more about how to construct the required ARN, see Constructing an ARN for Amazon RDS.

RDS API

You can add, list, or remove tags for a DB instance using the Amazon RDS API.

- To add a tag to an Amazon RDS resource, use the `AddTagsToResource` operation.
- To list tags that are assigned to an Amazon RDS resource, use the `ListTagsForResource`.
- To remove tags from an Amazon RDS resource, use the `RemoveTagsFromResource` operation.

To learn more about how to construct the required ARN, see Constructing an ARN for Amazon RDS.

When working with XML using the Amazon RDS API, tags use the following schema:

```
<Tagging>
      <TagSet>
          <Tag>
              <Key>Project</Key>
              <Value>Trinity</Value>
          </Tag>
          <Tag>
              <Key>User</Key>
              <Value>Jones</Value>
          </Tag>
      </TagSet>
  </Tagging>
```

The following table provides a list of the allowed XML tags and their characteristics. Values for `Key` and `Value` are case-sensitive. For example, `project=Trinity` and `PROJECT=Trinity` are distinct tags.

Tagging element	Description
TagSet	A tag set is a container for all tags assigned to an Amazon RDS resource. There can be only one tag set per resource. You work with a TagSet only through the Amazon RDS API.
Tag	A tag is a user-defined key-value pair. There can be from 1 to 50 tags in a tag set.
Key	A key is the required name of the tag. For restrictions, see Tag structure in Amazon RDS.

Tagging element	Description
	The string value can be from 1 to 128 Unicode characters in length and cannot be prefixed with `aws:` or `rds:`. The string can only contain only the set of Unicode letters, digits, white space, '_', '.', '/', '=', '+', '-' (Java regex: "^([\\p{L}\\p{Z}\\p{N}_.:/=+\\-]*)$"). Keys must be unique to a tag set. For example, you cannot have a key-pair in a tag set with the key the same but with different values, such as project/Trinity and project/Xanadu.
Value	A value is the optional value of the tag. For restrictions, see Tag structure in Amazon RDS. The string value can be from 1 to 256 Unicode characters in length and cannot be prefixed with `aws:` or `rds:`. The string can only contain only the set of Unicode letters, digits, white space, '_', '.', '/', '=', '+', '-' (Java regex: "^([\\p{L}\\p{Z}\\p{N}_.:/=+\\-]*)$"). Values do not have to be unique in a tag set and can be null. For example, you can have a key-value pair in a tag set of project/Trinity and cost-center/Trinity.

Tutorial: Use tags to specify which Aurora DB clusters to stop

Suppose that you're creating a number of Aurora DB clusters in a development or test environment. You need to keep all of these clusters for several days. Some of the clusters run tests overnight. Other clusters can be stopped overnight and started again the next day. The following example shows how to assign a tag to those clusters that are suitable to stop overnight. Then the example shows how a script can detect which clusters have that tag and then stop those clusters. In this example, the value portion of the key-value pair doesn't matter. The presence of the `stoppable` tag signifies that the cluster has this user-defined property.

To specify which Aurora DB clusters to stop

1. Determine the ARN of a cluster that you want to designate as stoppable.

The commands and APIs for tagging work with ARNs. That way, they can work seamlessly across Amazon Regions, Amazon accounts, and different types of resources that might have identical short names. You can specify the ARN instead of the cluster ID in CLI commands that operate on clusters. Substitute the name of your own cluster for *dev-test-cluster*. In subsequent commands that use ARN parameters, substitute the ARN of your own cluster. The ARN includes your own Amazon account ID and the name of the Amazon Region where your cluster is located.

```
$ aws rds describe-db-clusters --db-cluster-identifier dev-test-cluster \
  --query "*[].{DBClusterArn:DBClusterArn}" --output text
arn:aws-cn:rds:us-east-1:123456789:cluster:dev-test-cluster
```

2. Add the tag `stoppable` to this cluster.

   You choose the name for this tag. This approach means that you can avoid devising a naming convention that encodes all relevant information in names. In such a convention, you might encode information in the DB instance name or names of other resources. Because this example treats the tag as an attribute that is either present or absent, it omits the `Value=` part of the `--tags` parameter.

```
$ aws rds add-tags-to-resource \
  --resource-name arn:aws-cn:rds:us-east-1:123456789:cluster:dev-test-cluster \
  --tags Key=stoppable
```

3. Confirm that the tag is present in the cluster.

   These commands retrieve the tag information for the cluster in JSON format and in plain tab-separated text.

```
$ aws rds list-tags-for-resource \
  --resource-name arn:aws-cn:rds:us-east-1:123456789:cluster:dev-test-cluster
{
    "TagList": [
        {
            "Key": "stoppable",
            "Value": ""

        }
    ]
}
```

```
$ aws rds list-tags-for-resource \
  --resource-name arn:aws-cn:rds:us-east-1:123456789:cluster:dev-test-cluster --
output text
TAGLIST stoppable
```

4. To stop all the clusters that are designated as `stoppable`, prepare a list of all your clusters. Loop through the list and check if each cluster is tagged with the relevant attribute.

   This Linux example uses shell scripting to save the list of cluster ARNs to a temporary file and then perform CLI commands for each cluster.

```
$ aws rds describe-db-clusters --query "*[].[DBClusterArn]" --output text >/tmp/
cluster_arns.lst
$ for arn in $(cat /tmp/cluster_arns.lst)
do
  match="$(aws rds list-tags-for-resource --resource-name $arn --output text | grep
 'TAGLIST\tstoppable')"
  if [[ ! -z "$match" ]]
  then
      echo "Cluster $arn is tagged as stoppable. Stopping it now."
# Note that you can specify the full ARN value as the parameter instead of the
 short ID 'dev-test-cluster'.
      aws rds stop-db-cluster --db-cluster-identifier $arn
  fi
done

Cluster arn:aws-cn:rds:us-east-1:123456789:cluster:dev-test-cluster is tagged as
 stoppable. Stopping it now.
{
    "DBCluster": {
        "AllocatedStorage": 1,
        "AvailabilityZones": [
            "us-east-1e",
            "us-east-1c",
            "us-east-1d"
        ],
        "BackupRetentionPeriod": 1,
        "DBClusterIdentifier": "dev-test-cluster",
        ...
```

You can run a script like this at the end of each day to make sure that nonessential clusters are stopped. You might also schedule a job using a utility such as `cron` to perform such a check each

night. For example, you might do this in case some clusters were left running by mistake. Here, you might fine-tune the command that prepares the list of clusters to check.

The following command produces a list of your clusters, but only the ones in `available` state. The script can ignore clusters that are already stopped, because they will have different status values such as `stopped` or `stopping`.

```
$ aws rds describe-db-clusters \
  --query '*[].{DBClusterArn:DBClusterArn,Status:Status}|[?Status == `available`]|[].
{DBClusterArn:DBClusterArn}' \
  --output text
arn:aws-cn:rds:us-east-1:123456789:cluster:cluster-2447
arn:aws-cn:rds:us-east-1:123456789:cluster:cluster-3395
arn:aws-cn:rds:us-east-1:123456789:cluster:dev-test-cluster
arn:aws-cn:rds:us-east-1:123456789:cluster:pg2-cluster
```

Tip

You can use assigning tags and finding clusters that have those tags to reduce costs in other ways. For example, take the scenario with Aurora DB clusters used for development and testing. Here, you might designate some clusters to be deleted at the end of each day, or to have only their reader DB instances deleted. Or you might designate some to have their DB instances changed to small DB instance classes during times of expected low usage.

Amazon Resource Names (ARNs) in Amazon RDS

Resources created in Amazon Web Services are each uniquely identified with an Amazon Resource Name (ARN). For certain Amazon RDS operations, you must uniquely identify an Amazon RDS resource by specifying its ARN. For example, when you create an RDS DB instance read replica, you must supply the ARN for the source DB instance.

For information about constructing an ARN and getting an existing ARN, see the following topics.

Topics

- Constructing an ARN for Amazon RDS
- Getting an existing ARN for Amazon RDS

Constructing an ARN for Amazon RDS

Resources created in Amazon Web Services are each uniquely identified with an Amazon Resource Name (ARN). You can construct an ARN for an Amazon RDS resource using the following syntax.

`arn:aws-cn:rds:<region>:<account number>:<resourcetype>:<name>`

For global cluster resources, the ARN doesn't include an Amazon Web Services Region: `arn:aws:rds::<account number>:global-cluster:<name>`. ARNs for global clusters don't appear in the Amazon Web Services Management Console.

Region Name	Region	Endpoint	Protocol	
China (Beijing)	cn-north-1	rds.cn-north-1.amazonaws.com.cn	HTTPS	
		rds.cn-north-1.api.amazonwebservices.com.cn	HTTPS	
China (Ningxia)	cn-northwest-1	rds.cn-northwest-1.amazonaws.com.cn	HTTPS	
		rds.cn-northwest-1.api.amazonwebservices.com.cn	HTTPS	

The following table shows the format that you should use when constructing an ARN for a particular Amazon RDS resource type.

Resource type	ARN format
DB instance	arn:aws-cn:rds:*<region>*:*<account>* :db:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :db:my-mysql-instance-1`
DB cluster	arn:aws-cn:rds:*<region>*:*<account>* :cluster:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :cluster: my-aurora-cluster-1`
Event subscription	arn:aws-cn:rds:*<region>*:*<account>* :es:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :es:my-subscription`
DB parameter group	arn:aws-cn:rds:*<region>*:*<account>* :pg:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :pg:my-param-enable-logs`
DB cluster parameter group	arn:aws-cn:rds:*<region>*:*<account>* :cluster-pg:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :cluster-pg: my-cluster-param-timezone`
Reserved DB instance	arn:aws-cn:rds:*<region>*:*<account>* :ri:*<name>*

Resource type	ARN format
	For example: `arn:aws-cn:rds: us-east-2 :123456789012 :ri:my-reserved-postgresql`
DB security group	arn:aws-cn:rds:*<region>*:*<account>* :secgrp:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :secgrp:my-public`
Automated DB snapshot	arn:aws-cn:rds:*<region>*:*<account>* :snapshot:rds:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :snapshot :rds: my-mysql-db-2019-07-22-07-23`
Automated DB cluster snapshot	arn:aws-cn:rds:*<region>*:*<account>* :cluster-snapshot: rds:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :cluster-snapshot:rds: my-aurora-cluster-2019-07-22-16-16`
Manual DB snapshot	arn:aws-cn:rds:*<region>*:*<account>* :snapshot:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :snapshot: my-mysql-db-snap`

Resource type	ARN format
Manual DB cluster snapshot	arn:aws-cn:rds:*<region>*:*<account>* :cluster-snapshot: *<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :cluster-snapshot: my-aurora-cluster-snap`
DB subnet group	arn:aws-cn:rds:*<region>*:*<account>* :subgrp:*<name>* For example: `arn:aws-cn:rds: us-east-2 :123456789012 :subgrp:my-subnet-10`
Global cluster	arn:aws:rds::*<account>* :global-cluster:*<name>* For example: `arn:aws:rds:: 123456789012 :global-cluster: my-aurora-global-cluster-1`

Getting an existing ARN for Amazon RDS

You can get the ARN of an RDS resource by using the Amazon Web Services Management Console, Amazon Command Line Interface (Amazon CLI), or RDS API.

Console

To get an ARN from the Amazon Web Services Management Console, navigate to the resource you want an ARN for, and view the details for that resource.

For example, you can get the ARN for a DB cluster from the **Configuration** tab of the DB cluster details.
DB cluster ARN.

Amazon CLI

To get an ARN from the Amazon CLI for a particular RDS resource, you use the `describe` command for that resource. The following table shows each Amazon CLI command, and the ARN property used with the command to get an ARN.

Amazon CLI command	ARN property
describe-event-subscriptions	EventSubscriptionArn
describe-certificates	CertificateArn
describe-db-parameter-groups	DBParameterGroupArn
describe-db-cluster-parameter-groups	DBClusterParameterGroupArn
describe-db-instances	DBInstanceArn
describe-db-security-groups	DBSecurityGroupArn
describe-db-snapshots	DBSnapshotArn
describe-events	SourceArn
describe-reserved-db-instances	ReservedDBInstanceArn
describe-db-subnet-groups	DBSubnetGroupArn
describe-db-clusters	DBClusterArn
describe-db-cluster-snapshots	DBClusterSnapshotArn

For example, the following Amazon CLI command gets the ARN for a DB instance.

Example

For Linux, macOS, or Unix:

```
aws rds describe-db-instances \
--db-instance-identifier DBInstanceIdentifier \
```

```
--region us-west-2 \
--query "*[].{DBInstanceIdentifier:DBInstanceIdentifier,DBInstanceArn:DBInstanceArn}"
```

For Windows:

```
aws rds describe-db-instances ^
--db-instance-identifier DBInstanceIdentifier ^
--region us-west-2 ^
--query "*[].{DBInstanceIdentifier:DBInstanceIdentifier,DBInstanceArn:DBInstanceArn}"
```

The output of that command is like the following:

```
[
    {
        "DBInstanceArn": "arn:aws-cn:rds:us-west-2:account_id:db:instance_id",
        "DBInstanceIdentifier": "instance_id"
    }
]
```

RDS API

To get an ARN for a particular RDS resource, you can call the following RDS API operations and use the ARN properties shown following.

RDS API operation	ARN property
DescribeEventSubscriptions	EventSubscriptionArn
DescribeCertificates	CertificateArn
DescribeDBParameterGroups	DBParameterGroupArn
DescribeDBClusterParameterGroups	DBClusterParameterGroupArn
DescribeDBInstances	DBInstanceArn
DescribeDBSecurityGroups	DBSecurityGroupArn
DescribeDBSnapshots	DBSnapshotArn

RDS API operation	ARN property
DescribeEvents	SourceArn
DescribeReservedDBInstances	ReservedDBInstanceArn
DescribeDBSubnetGroups	DBSubnetGroupArn
DescribeDBClusters	DBClusterArn
DescribeDBClusterSnapshots	DBClusterSnapshotArn

Amazon Aurora updates

Amazon Aurora releases updates regularly. Updates are applied to Amazon Aurora DB clusters during system maintenance windows. The timing when updates are applied depends on the Region and maintenance window setting for the DB cluster, and also the type of update. Updates require a database restart, so you typically experience 20–30 seconds of downtime. After this downtime, you can resume using your DB cluster or clusters. You can view or change your maintenance window settings from the Amazon Web Services Management Console.

> **Note**
>
> The time required to reboot your DB instance depends on the crash recovery process, database activity at the time of reboot, and the behavior of your specific DB engine. To improve the reboot time, we recommend that you reduce database activity as much as possible during the reboot process. Reducing database activity reduces rollback activity for in-transit transactions.

For information on operating system updates for Amazon Aurora, see Operating system updates for Aurora DB clusters.

Some updates are specific to a database engine supported by Aurora. For more information about database engine updates, see the following table.

Database engine	Updates
Amazon Aurora MySQL	See Database engine updates for Amazon Aurora MySQL
Amazon Aurora PostgreSQL	See Database engine updates for Amazon Aurora PostgreSQL

Identifying your Amazon Aurora version

Amazon Aurora includes certain features that are general to Aurora and available to all Aurora DB clusters. Aurora includes other features that are specific to a particular database engine that Aurora supports. These features are available only to those Aurora DB clusters that use that database engine, such as Aurora PostgreSQL.

An Aurora DB instance provides two version numbers, the Aurora version number and the Aurora database engine version number. Aurora version numbers use the following format.

```
<major version>.<minor version>.<patch version>
```

To get the Aurora version number from an Aurora DB instance using a particular database engine, use one of the following queries.

Database engine	Queries
Amazon Aurora MySQL	`SELECT AURORA_VERSION();` `SHOW @@aurora_version;`
Amazon Aurora PostgreSQL	`SELECT AURORA_VERSION();`

Amazon RDS Extended Support with Amazon Aurora

RDS Extended Support allows you to continue running a database on a major engine version past the Aurora end of standard support date for an additional cost.

You can enroll a database in RDS Extended Support when you first create or restore a DB instance. You can also change the enrollment status of an existing DB instance or DB cluster at any time by modifying the `EngineLifecycleSupport` parameter using the Amazon CLI or RDS API. This change takes effect immediately with no downtime. For Aurora and Multi-AZ DB clusters, modify the setting at the cluster level.

If you disable the enrollment status of a DB instance or DB cluster that is already past its standard support end date, the instance or cluster automatically upgrades to the next supported major version. See ModifyDBInstance and ModifyDBCluster for more information.

If you enabled RDS Extended Support during the creation or restoration of a DB instance, then after the Aurora end of standard support date, Amazon Aurora will automatically enroll the DB instance in RDS Extended Support. Automatic enrollment into RDS Extended Support doesn't change the database engine and doesn't impact the uptime or performance of your DB instance.

RDS Extended Support provides the following updates and technical support:

- Security updates for critical and high CVEs for your DB instance or DB cluster, including the database engine
- Bug fixes and patches for critical issues
- The ability to open support cases and receive troubleshooting help within the standard Amazon RDS service level agreement

This paid offering gives you more time to upgrade to a supported major engine version. For example, the Aurora end of standard support date for Aurora MySQL version 2 is October 31, 2024. However, you aren't ready to manually upgrade to Aurora MySQL version 3 before that date. In this case, Amazon Aurora automatically enrolls your cluster in RDS Extended Support on October 31, 2024, and you can continue to run Aurora MySQL version 2. Starting December 1, 2024, Amazon Aurora automatically charges you for RDS Extended Support.

RDS Extended Support is available for up to 3 years past the community end of life date for a major engine version (3 years and 4 months for Aurora MySQL version 2). After this time, if you

haven't upgraded your major engine version to a supported version, then Amazon Aurora will automatically upgrade your major engine version. We recommend that you upgrade to a supported major engine version as soon as possible.

For more information about the Aurora end of standard support dates and the RDS end of Extended Support dates, see Release calendar for Aurora MySQL major versions and Release calendar for Aurora PostgreSQL major versions.

Topics

- Overview of Amazon RDS Extended Support
- Amazon RDS Extended Support charges
- Versions with Amazon RDS Extended Support
- Amazon Aurora and customer responsibilities with Amazon RDS Extended Support
- Creating an Aurora DB cluster or a global cluster with Amazon RDS Extended Support
- Viewing the enrollment of your Aurora DB clusters or global clusters in Amazon RDS Extended Support
- Viewing support dates for engine versions in Amazon RDS Extended Support
- Restoring an Aurora DB cluster or a global cluster with Amazon RDS Extended Support

Overview of Amazon RDS Extended Support

After the Aurora end of standard support date, if you didn't disable RDS Extended Support during the creation or restoration of your DB instances and DB clusters, then Amazon Aurora will automatically enroll them in RDS Extended Support. You can also prevent automatic enrollment by changing the `EngineLifecycleSupport` parameter on an existing DB instance or DB cluster. Aurora automatically upgrades your DB instance to the last minor version released before the Aurora end of standard support date, if you aren't already running that version. Amazon Aurora won't upgrade your minor version until *after* the Aurora end of standard support date for your major engine version.

You can create new databases with major engine versions that have reached the Aurora end of standard support date. Aurora automatically enrolls these new databases in RDS Extended Support and charges you for this offering.

If you upgrade to an engine that's still under Aurora standard support *before* the Aurora end of standard support date, Amazon Aurora won't enroll your engine in RDS Extended Support.

If you attempt to restore a snapshot of a database compatible with an engine that's past the Aurora end of standard support date but isn't enrolled in RDS Extended Support, then Amazon Aurora will attempt to upgrade the snapshot to be compatible with the latest engine version that is still under Aurora standard support. If the restore fails, then Amazon Aurora will automatically enroll your engine in RDS Extended Support with a version that's compatible with the snapshot.

You can end enrollment in RDS Extended Support at any time. To end enrollment, you can change the `EngineLifecycleSupport` parameter using the Amazon CLI or RDS API. If you disable the enrollment status of a DB instance or DB cluster that is already past its standard support end date, the instance or cluster automatically upgrades to the next supported major version.

You can also upgrade each enrolled engine to a newer engine version that's still under Aurora standard support to end enrollment. The end of RDS Extended Support enrollment becomes effective the day that you complete an upgrade to a newer engine version that's still under Aurora standard support.

For more information about the Aurora end of standard support dates and the RDS end of Extended Support dates, see Release calendar for Aurora MySQL major versions and Release calendar for Aurora PostgreSQL major versions.

Amazon RDS Extended Support charges

You will incur charges for all engines enrolled in RDS Extended Support beginning the day after the Aurora end of standard support date. For the Aurora end of standard support date, see Amazon Aurora major versions.

The additional charge for RDS Extended Support automatically stops when you take one of the following actions:

- Upgrade to an engine version that's covered under standard support.
- Delete the database that's running a major version past the Aurora end of standard support date.

The charges will restart if your target engine version enters RDS Extended Support in the future.

For example, Aurora PostgreSQL 11 enters Extended Support on March 1, 2024, but charges don't start until April 1, 2024. You upgrade your Aurora PostgreSQL 11 database to Aurora PostgreSQL 12 on April 30, 2024. You will only be charged for 30 days of Extended Support on Aurora PostgreSQL 11. You continue running Aurora PostgreSQL 12 on this DB instance past

the RDS end of standard support date of February 28, 2025. Your database will again incur RDS Extended Support charges starting on March 1, 2025.

For more information, see Amazon Aurora pricing.

Avoiding charges for Amazon RDS Extended Support

You can avoid being charged for RDS Extended Support by preventing Aurora from creating or restoring an Aurora DB cluster or a global cluster past the Aurora end of standard support date. To do this, use the Amazon CLI or the RDS API.

You can also avoid being charged for RDS Extended Support by changing the enrollment status of an existing DB instance or DB cluster at any time by modifying the `EngineLifecycleSupport` parameter using the Amazon CLI or the RDS API. If you disable the enrollment status of a DB instance or DB cluster that is already past its standard support end date, the instance or cluster automatically upgrades to the next supported major version.

In the Amazon CLI, specify `open-source-rds-extended-support-disabled` for the `--engine-lifecycle-support` option. In the RDS API, specify `open-source-rds-extended-support-disabled` for the `EngineLifecycleSupport` parameter. For more information, see Creating an Aurora DB cluster or a global cluster or Restoring an Aurora DB cluster or a global cluster.

Versions with Amazon RDS Extended Support

RDS Extended Support is available for Aurora MySQL and for Aurora PostgreSQL. For more information, see Amazon Aurora major versions.

RDS Extended Support is only available on certain minor versions. Minor versions are only indicated as supporting RDS Extended Support *after* major versions reach the Community end of life dates. For more information, see Release calendar for Aurora MySQL in the *Aurora MySQL Release Notes* and Release calendar for Aurora PostgreSQL in the *Aurora PostgreSQL Release Notes*.

RDS Extended Support is only available on Aurora serverless. It isn't available on Aurora Serverless v1.

You can also view information about support dates for engine versions by using the Amazon CLI or the RDS API. For more information, see Viewing support dates for engine versions in Amazon RDS Extended Support.

Amazon Aurora and customer responsibilities with Amazon RDS Extended Support

The following content describes the responsibilities of Amazon Aurora and your responsibilities with RDS Extended Support.

Topics

- Amazon Aurora responsibilities
- Your responsibilities

Amazon Aurora responsibilities

After the Aurora end of standard support date, Amazon Aurora will supply patches, bug fixes, and upgrades for engines that are enrolled in RDS Extended Support. This will occur for up to 3 years, or until you stop using the engines, whichever happens first.

The patches will be for Critical and High CVEs as defined by the National Vulnerability Database (NVD) CVSS severity ratings. For more information, see Vulnerability Metrics.

Your responsibilities

You're responsible for applying the patches, bug fixes, and upgrades given for Aurora DB clusters or global clusters enrolled in RDS Extended Support. Amazon Aurora reserves the right to change, replace, or withdraw such patches, bug fixes, and upgrades at any time. If a patch is necessary to address security or critical stability issues, Amazon Aurora reserves the right to update your Aurora DB clusters or global clusters with the patch, or to require that you install the patch.

You're also responsible for upgrading your engine to a newer engine version *before* the RDS end of Extended Support date. The RDS end of Extended Support date is typically 3 years after the community end of life. . For the RDS end of Extended Support date for your database major engine version, see Amazon Aurora major versions.

If you don't upgrade your engine, then after the RDS end of Extended Support date, Amazon Aurora will attempt to upgrade your engine to a newer engine version that's supported under Aurora standard support. If the upgrade fails, then Amazon Aurora reserves the right to delete the Aurora DB cluster or global cluster that's running the engine past the Aurora end of standard support date. However, before doing so, Amazon Aurora will preserve your data from that engine.

Creating an Aurora DB cluster or a global cluster with Amazon RDS Extended Support

When you create an Aurora DB cluster or a global cluster, select **Enable RDS Extended Support** in the console, or use the Extended Support option in the Amazon CLI or the parameter in the RDS API. When you enroll an Aurora DB cluster or a global cluster in Amazon RDS Extended Support, it is permanently enrolled in RDS Extended Support for the life of the Aurora DB cluster or global cluster.

If you use the console, you must select **Enable RDS Extended Support**. The setting isn't selected by default.

If you use the Amazon CLI or the RDS API and don't specify the RDS Extended Support setting, Amazon RDS defaults to enabling RDS Extended Support. When you automate by using Amazon CloudFormation or other services, this default behavior maintains the availability of your database past the Aurora end of standard support date.

You can prevent enrollment in RDS Extended Support by using the Amazon CLI or the RDS API to create an Aurora DB cluster or a global cluster.

Topics

- RDS Extended Support behavior
- Considerations for RDS Extended Support
- Create an Aurora DB cluster or a global cluster with RDS Extended Support

RDS Extended Support behavior

The following table summarizes what happens when a major engine version reaches the Aurora end of standard support.

RDS Extended Support status*	Behavior
Enabled	Amazon RDS charges you for RDS Extended Support.

RDS Extended Support status*	Behavior
Disabled	Amazon RDS upgrades your Aurora DB cluster or global cluster to a supported engine version. This upgrade takes place on or shortly after the Aurora end of standard support date.

* In the RDS console, the RDS Extended Support status appears as Yes or No. In the Amazon CLI or RDS API, the RDS Extended Support status appears as `open-source-rds-extended-support` or `open-source-rds-extended-support-disabled`.

Considerations for RDS Extended Support

Before creating an Aurora DB cluster or a global cluster, consider the following items:

- *After* the Aurora end of standard support date has passed, you can prevent the creation of a new Aurora DB cluster or a new global cluster and avoid RDS Extended Support charges. To do this, use the Amazon CLI or the RDS API. In the Amazon CLI, specify `open-source-rds-extended-support-disabled` for the `--engine-lifecycle-support` option. In the RDS API, specify `open-source-rds-extended-support-disabled` for the `EngineLifecycleSupport` parameter. If you specify `open-source-rds-extended-support-disabled` and the Aurora end of standard support date has passed, creating an Aurora DB cluster or a global cluster will always fail.
- RDS Extended Support is set at the cluster level. Members of a cluster will always have the same setting for RDS Extended Support in the RDS console, `--engine-lifecycle-support` in the Amazon CLI, and `EngineLifecycleSupport` in the RDS API.

For more information, see Amazon Aurora versions.


Create an Aurora DB cluster or a global cluster with RDS Extended Support

You can create an Aurora DB cluster or a global cluster with an RDS Extended Support version using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

When you create an Aurora DB cluster or a global cluster, in the **Engine options** section, select **Enable RDS Extended Support**. This setting isn't selected by default.

The following image shows the **Enable RDS Extended Support** setting:

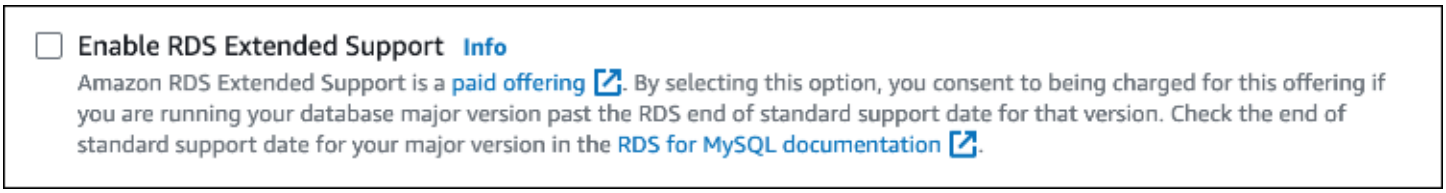

Amazon CLI

When you run the create-db-cluster or create-global-cluster Amazon CLI command, select RDS Extended Support by specifying `open-source-rds-extended-support` for the `--engine-lifecycle-support` option. By default, this option is set to `open-source-rds-extended-support`.

To prevent the creation of a new Aurora DB cluster or a global cluster after the Aurora end of standard support date, specify `open-source-rds-extended-support-disabled` for the `--engine-lifecycle-support` option. By doing so, you will avoid any associated RDS Extended Support charges.

RDS API

When you use the CreateDBCluster or CreateGlobalCluster Amazon RDS API operation, select RDS Extended Support by setting the `EngineLifecycleSupport` parameter to `open-source-rds-extended-support`. By default, this parameter is set to `open-source-rds-extended-support`.

To prevent the creation of a new Aurora DB cluster or a global cluster after the Aurora end of standard support date, specify `open-source-rds-extended-support-disabled` for the `EngineLifecycleSupport` parameter. By doing so, you will avoid any associated RDS Extended Support charges.

For more information, see the following topics:

- To create an Aurora DB cluster, follow the instructions for your DB engine in Creating an Amazon Aurora DB cluster.

- To create a global cluster, follow the instructions for your DB engine in Creating an Amazon Aurora global database.

Viewing the enrollment of your Aurora DB clusters or global clusters in Amazon RDS Extended Support

You can view the enrollment of your Aurora DB clusters or global clusters in RDS Extended Support using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.


> **Note**
>
> The **RDS Extended Support** column in the console, the `--engine-lifecycle-support` option in the Amazon CLI, and the `EngineLifecycleSupport` parameter in the RDS API only indicate enrollment in RDS Extended Support. Charges for RDS Extended Support only start when your DB engine version has reached the Aurora end of standard support. For more information, see Amazon Aurora major versions.
> For example, you have an Aurora PostgreSQL 11 database that is enrolled in RDS Extended Support. On April 1, 2024, Amazon RDS started charging you for RDS Extended Support for this database. On July 31, 2024, you upgraded this database to Aurora PostgreSQL 12. The RDS Extended Support status for this database remains enabled. However, the RDS Extended Support charges for this database stopped because Aurora PostgreSQL 12 hadn't reached Aurora end of standard support yet. Amazon RDS won't charge you for RDS Extended Support for this database until March 1, 2025, which is when Aurora standard support ends for Aurora PostgreSQL 12.

Console


To view the enrollment of your Aurora DB clusters or global clusters in RDS Extended Support

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**. The value under **RDS Extended Support** indicates if an Aurora DB cluster or global cluster is enrolled in RDS Extended Support. If no value appears, then RDS Extended Support isn't available for your database.

> **Tip**
>
> If the **RDS Extended Support** column doesn't appear, choose the **Preferences** icon, and then turn on **RDS Extended Support**.

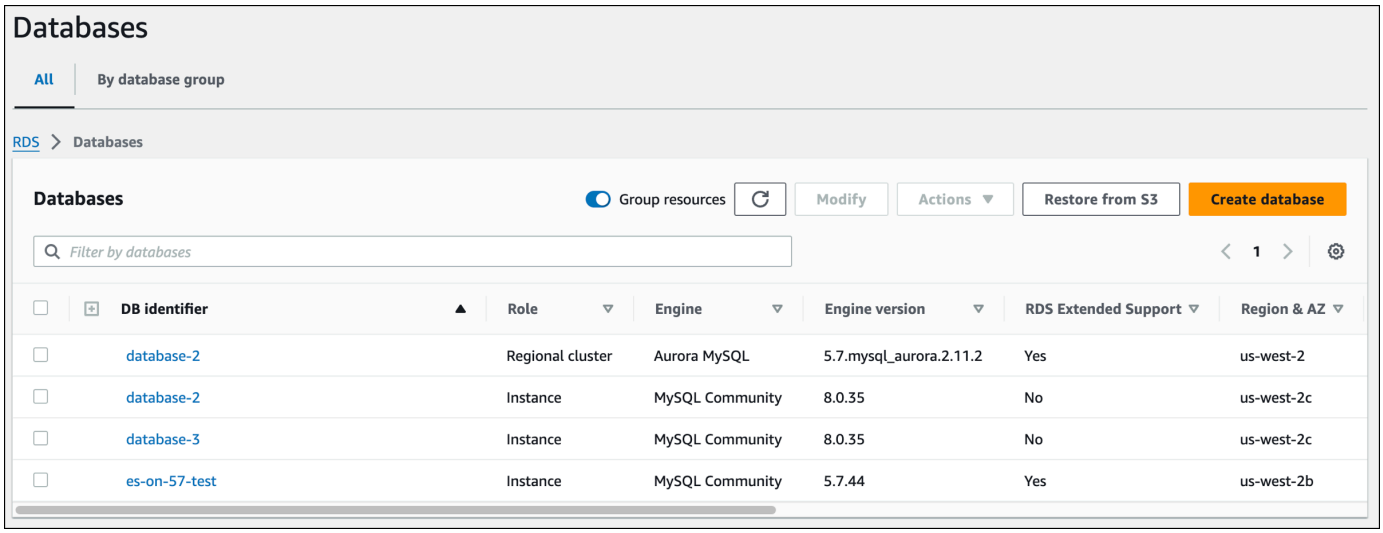

3. You can also view the enrollment on the **Configuration** tab for each database. Choose a database under **DB identifier**. On the **Configuration** tab, look under **Extended Support** to see if the database is enrolled or not.

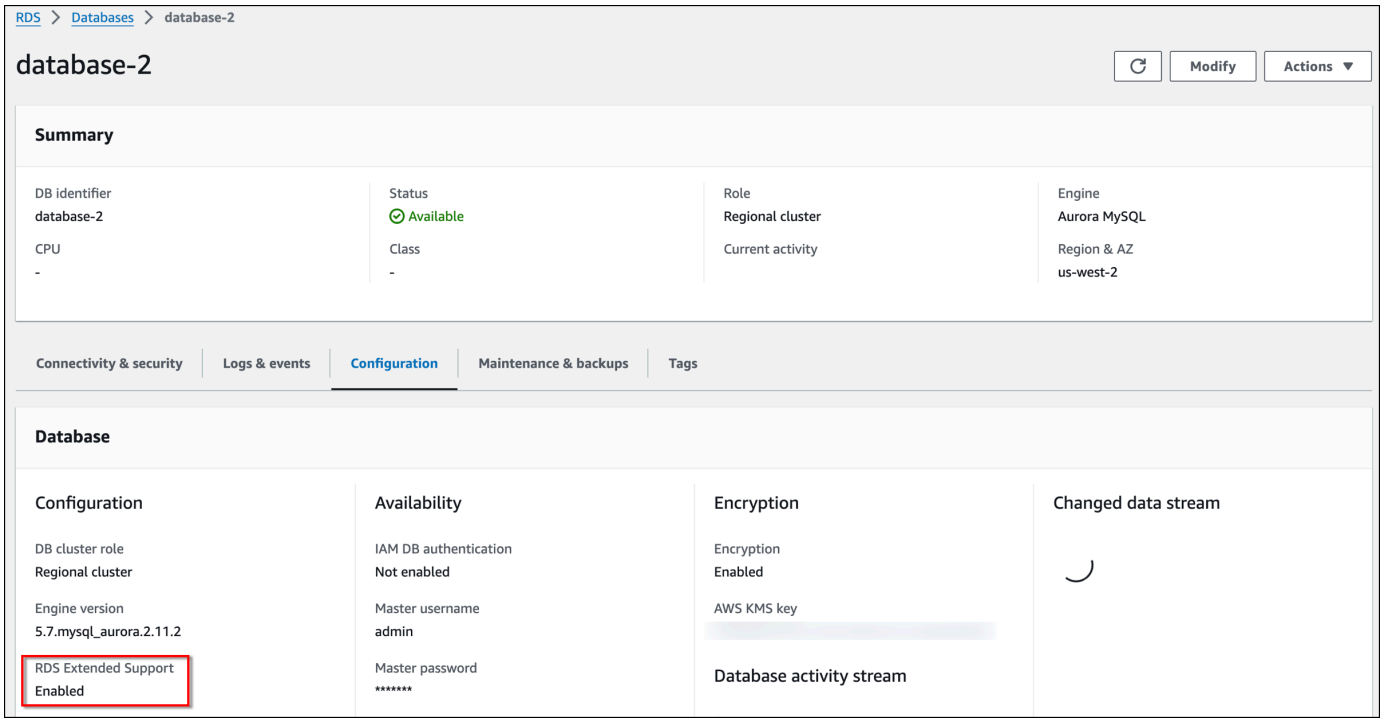

Amazon CLI

To view the enrollment of your databases in RDS Extended Support by using the Amazon CLI, run the describe-db-clusters or describe-global-clusters command.

If RDS Extended Support is available for a database, then the response includes the parameter `EngineLifecycleSupport`. The value `open-source-rds-extended-support` indicates that an Aurora DB cluster or global cluster is enrolled in RDS Extended Support. The value `open-source-rds-extended-support-disabled` indicates that enrollment of the Aurora DB cluster or global cluster in RDS Extended Support was disabled.

Example

The following command returns information for all of your Aurora DB clusters:

```
aws rds describe-db-clusters
```

The following response shows that an Aurora PostgreSQL engine running on the Aurora DB cluster `database-1` is enrolled in RDS Extended Support:

```
{
    "DBClusterIdentifier": "database-1",
    ...
    "Engine": "aurora-postgresql",
    ...
    "EngineLifecycleSupport": "open-source-rds-extended-support"
}
```

RDS API

To view the enrollment of your databases in RDS Extended Support by using the Amazon RDS API, use the DescribeDBClusters or DescribeGlobalClusters operation.

If RDS Extended Support is available for a database, then the response includes the parameter `EngineLifecycleSupport`. The value `open-source-rds-extended-support` indicates that an Aurora DB cluster or global cluster is enrolled in RDS Extended Support. The value `open-source-rds-extended-support-disabled` indicates that enrollment of the Aurora DB cluster or global cluster in RDS Extended Support was disabled.

Viewing support dates for engine versions in Amazon RDS Extended Support

You can view information about support dates for engine versions for your Aurora DB clusters or global clusters in Amazon RDS Extended Support by using the Amazon CLI or the RDS API. This information can help you plan for upgrades.

Amazon CLI commands and RDS API operations return start and end dates for Aurora standard support and RDS Extended Support. These dates can also be found in the major engine version tables. For more information, see Amazon Aurora major versions.

Amazon CLI

To view the start and end dates for Aurora standard support and RDS Extended Support for your major engine versions by using the Amazon CLI, run the describe-db-major-engine-versions command.

This command returns the following relevant parameters:

- `SupportedEngineLifecycles` – This parameter is an array of objects that include `LifecycleSupportName`, `LifecycleSupportStartDate`, and `LifecycleSupportEndDate`.
- `LifecycleSupportName` – This parameter indicates the type of support the engine version is in: Aurora standard support (`open-source-rds-standard-support`) or RDS Extended Support (`open-source-rds-extended-support`).
- `LifecycleSupportStartDate` – This parameter lists the start date for either Aurora standard support or RDS Extended Support for the major engine version, depending on the value of `LifecycleSupportName`.
- `LifecycleSupportEndDate` – This parameter lists the end date for either Aurora standard support or RDS Extended Support for the major engine version, depending on the value of `LifecycleSupportName`.

Example

The response example shows the start and end dates for the supported engine life cycles `open-source-rds-standard-support` and `open-source-rds-extended-support` for Aurora

MySQL version 2 (MySQL 5.7). RDS Extended Support is available for Aurora MySQL version 2 (MySQL 5.7).

```
{
    "DBMajorEngineVersions": [
        {
            "Engine": "aurora-mysql",
            "MajorEngineVersion": "5.7",
            "SupportedEngineLifecycles": [
                {
                    "LifecycleSupportName": "open-source-rds-standard-support",
                    "LifecycleSupportStartDate": "2018-02-06T00:00:00+00:00",
                    "LifecycleSupportEndDate": "2024-10-31T23:59:59.999000+00:00"
                },
                {
                    "LifecycleSupportName": "open-source-rds-extended-support",
                    "LifecycleSupportStartDate": "2024-11-01T00:00:00+00:00",
                    "LifecycleSupportEndDate": "2027-02-28T23:59:59.999000+00:00"
                }
            ]
        },
        ...
    ]
}
```

RDS API

To view the start and end dates for Aurora standard support and RDS Extended Support for your major engine versions by using the RDS API, use the DescribeDBMajorEngineVersions operation.

If RDS Extended Support is available for an engine version, then the response includes the parameter `SupportedEngineLifeCycles` as an array with two objects. One object includes the start and end dates for Aurora standard support. The second object includes the start and end dates for RDS Extended Support.

If RDS Extended Support isn't available for an engine version, then the response only includes the parameter `SupportedEngineLifeCycles` as an array with a single object. This object includes the start and end dates for Aurora standard support.

Restoring an Aurora DB cluster or a global cluster with Amazon RDS Extended Support

When you restore an Aurora DB cluster or a global cluster, select **Enable RDS Extended Support** in the console, or use the Extended Support option in the Amazon CLI or the parameter in the RDS API. When you enroll an Aurora DB cluster or a global cluster in RDS Extended Support, it is permanently enrolled in RDS Extended Support for the life of the Aurora DB cluster or global cluster.

The default for the RDS Extended Support setting depends on whether you use the console, the Amazon CLI, or the RDS API to restore your database. If you use the console, you don't select **Enable RDS Extended Support**, and the major engine version you are restoring is past the Aurora end of standard support, then Amazon Aurora automatically upgrades your DB instance to a newer engine version. If you use the Amazon CLI or the RDS API and you don't specify the RDS Extended Support setting, then Amazon RDS defaults to enabling RDS Extended Support. When you automate by using Amazon CloudFormation or other services, this default behavior maintains the availability of your database past the Aurora end of standard support date. You can disable RDS Extended Support by using the Amazon CLI or the RDS API.

Topics

- RDS Extended Support behavior
- Considerations for RDS Extended Support
- Restore an Aurora DB cluster DB cluster or a global cluster with RDS Extended Support

RDS Extended Support behavior

The following table summarizes what happens when a major engine version of an Aurora DB cluster or a global cluster that you are restoring has reached the Aurora end of standard support.

RDS Extended Support status*	Behavior
Enabled	Amazon RDS charges you for RDS Extended Support.

RDS Extended Support status*	Behavior
Disabled	After the restore finishes, Amazon RDS automatically upgrades your Aurora DB cluster or global cluster to a newer engine version (in a future maintenance window).

* In the RDS console, the RDS Extended Support status appears as Yes or No. In the Amazon CLI or RDS API, the RDS Extended Support status appears as `open-source-rds-extended-support` or `open-source-rds-extended-support-disabled`.

Considerations for RDS Extended Support

Before restoring an Aurora DB cluster or a global cluster, consider the following items:

- *After* the Aurora end of standard support date has passed, if you want to restore an Aurora DB cluster or a global cluster from Amazon S3, you can only do so by using the Amazon CLI or the RDS API. Use the `--engine-lifecycle-support` option in the restore-db-cluster-from-s3 Amazon CLI command or the `EngineLifecycleSupport` parameter in the RestoreDBClusterFromS3 RDS API operation.
- If you want to prevent Aurora from restoring your databases to RDS Extended Support versions, specify `open-source-rds-extended-support-disabled` in the Amazon CLI or the RDS API. By doing so, you will avoid any associated RDS Extended Support charges.

  If you specify this setting, Amazon Aurora will automatically upgrade your restored database to a newer, supported major version. If the upgrade fails pre-upgrade checks, Amazon Aurora will safely roll back to the RDS Extended Support engine version. This database will remain in RDS Extended Support mode, and Amazon Aurora will charge you for RDS Extended Support until you manually upgrade your database.
- RDS Extended Support is set at the cluster level. Members of a cluster will always have the same setting for RDS Extended Support in the RDS console, `--engine-lifecycle-support` in the Amazon CLI, and `EngineLifecycleSupport` in the RDS API.

For more information, see Amazon Aurora versions.


Restore an Aurora DB cluster DB cluster or a global cluster with RDS Extended Support

You can restore an Aurora DB cluster or a global cluster with an RDS Extended Support version using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

When you restore an Aurora DB cluster or a global cluster, select **Enable RDS Extended Support** in the **Engine options** section. If you don't select this setting and the major engine version that you are restoring is past the Aurora end of standard support, then Amazon Aurora automatically upgrades your Aurora DB cluster or global cluster to a version under Aurora standard support.

The following image shows the **Enable RDS Extended Support** setting:

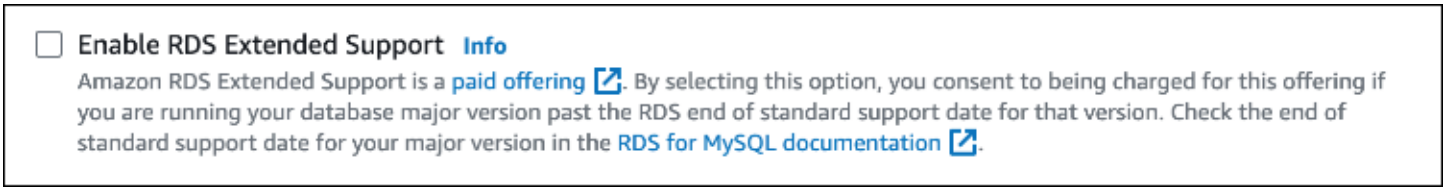

Amazon CLI

When you run the restore-db-cluster-from-snapshot Amazon CLI command, select RDS Extended Support by specifying `open-source-rds-extended-support` for the `--engine-lifecycle-support` option.

If you want to avoid charges associated with RDS Extended Support, set the `--engine-lifecycle-support` option to `open-source-rds-extended-support-disabled`. By default, this option is set to `open-source-rds-extended-support`.

You can also specify this value using the following Amazon CLI commands:

- restore-db-cluster-from-s3
- restore-db-cluster-to-point-in-time

RDS API

When you use the RestoreDBClusterFromSnapshot Amazon RDS API operation, select RDS Extended Support by setting the `EngineLifecycleSupport` parameter to `open-source-rds-extended-support`.

If you want to avoid charges associated with RDS Extended Support, set the `EngineLifecycleSupport` parameter to `open-source-rds-extended-support-disabled`. By default, this parameter is set to `open-source-rds-extended-support`.

You can also specify this value using the following RDS API operations:

- RestoreDBClusterFromS3
- RestoreDBClusterToPointInTime

For more information about restoring an Aurora DB cluster, follow the instructions for your DB engine in Backing up and restoring an Amazon Aurora DB cluster.

Using Amazon Aurora Blue/Green Deployments for database updates

A blue/green deployment copies a production database environment to a separate, synchronized staging environment. By using Amazon Aurora Blue/Green Deployments, you can make changes to the database in the staging environment without affecting the production environment. For example, you can upgrade the major or minor DB engine version or change database parameters in the staging environment. When you're ready, you can promote the staging environment to be the new production database environment, with downtime typically under one minute.

Amazon Aurora creates the staging environment by *cloning* the underlying Aurora storage volume in the production environment. The cluster volume in the staging environment only stores incremental changes made to that environment.

> **Note**
>
> Currently, Blue/Green Deployments are supported for Aurora MySQL, Aurora PostgreSQL, and Aurora Global Database. For Amazon RDS engine availability, see Using Amazon RDS Blue/Green Deployments for database updates in the *Amazon RDS User Guide*.

Topics

- Overview of Amazon Aurora Blue/Green Deployments
- Creating a blue/green deployment in Amazon Aurora
- Viewing a blue/green deployment in Amazon Aurora
- Switching a blue/green deployment in Amazon Aurora
- Deleting a blue/green deployment in Amazon Aurora

Overview of Amazon Aurora Blue/Green Deployments

By using Amazon Aurora Blue/Green Deployments, you can make and test database changes before implementing them in a production environment. A *blue/green deployment* creates a staging environment that copies the production environment. In a blue/green deployment, the *blue environment* is the current production environment. The *green environment* is the staging environment and stays in sync with the current production environment.

You can make changes to the Aurora DB cluster in the green environment without affecting production workloads. For example, you can upgrade the major or minor DB engine version or change database parameters in the staging environment. You can thoroughly test changes in the green environment. When ready, you can *switch over* the environments to transition the green environment to be the new production environment. The switchover typically takes under a minute with no data loss and no need for application changes.

Because the green environment is a copy of the topology of the production environment, the DB cluster and all of its DB instances are copied in the deployment. The green environment also includes the features used by the DB cluster, such as DB cluster snapshots, Performance Insights, Enhanced Monitoring, and Aurora serverless.

Amazon Aurora Blue/Green Deployments support Amazon RDS Proxy and smart drivers. These solutions reduce writer node upgrade downtime during switchover by detecting the topology change and redirecting connections to the new production environment without waiting for DNS propagation.

> **Note**
>
> Blue/Green Deployments are supported for Aurora MySQL, Aurora PostgreSQL, and Aurora Global Database. For Amazon RDS availability, see Overview of Amazon RDS Blue/Green Deployments in the *Amazon RDS User Guide*.

Topics

- Region and version availability
- Benefits of using Amazon RDS Blue/Green Deployments
- Workflow of a blue/green deployment
- Authorizing access to Amazon Aurora blue/green deployment operations

- Limitations and considerations for Amazon Aurora blue/green deployments
- Best practices for Amazon Aurora blue/green deployments

Region and version availability

Feature availability and support varies across specific versions of each database engine, and across Amazon Web Services Regions. For more information, see the section called “Blue/Green Deployments”.

Benefits of using Amazon RDS Blue/Green Deployments

By using Amazon RDS Blue/Green Deployments, you can stay current on security patches, improve database performance, and adopt newer database features with short, predictable downtime. Blue/green deployments reduce the risks and downtime for database updates, such as major or minor engine version upgrades.

Blue/green deployments provide the following benefits:


- Easily create a production-ready staging environment.
- Automatically replicate database changes from the production environment to the staging environment.
- Test database changes in a safe staging environment without affecting the production environment.
- Stay current with database patches and system updates.
- Implement and test newer database features.
- Switch over your staging environment to be the new production environment without changes to your application.
- Safely switch over through the use of built-in switchover guardrails.
- Eliminate data loss during switchover.
- Switch over quickly, typically under a minute depending on your workload.

Workflow of a blue/green deployment

Complete the following major steps when you use a blue/green deployment for Aurora DB cluster updates.


1. Identify a production DB cluster that requires updates.

   The following image shows an example of a production DB cluster.

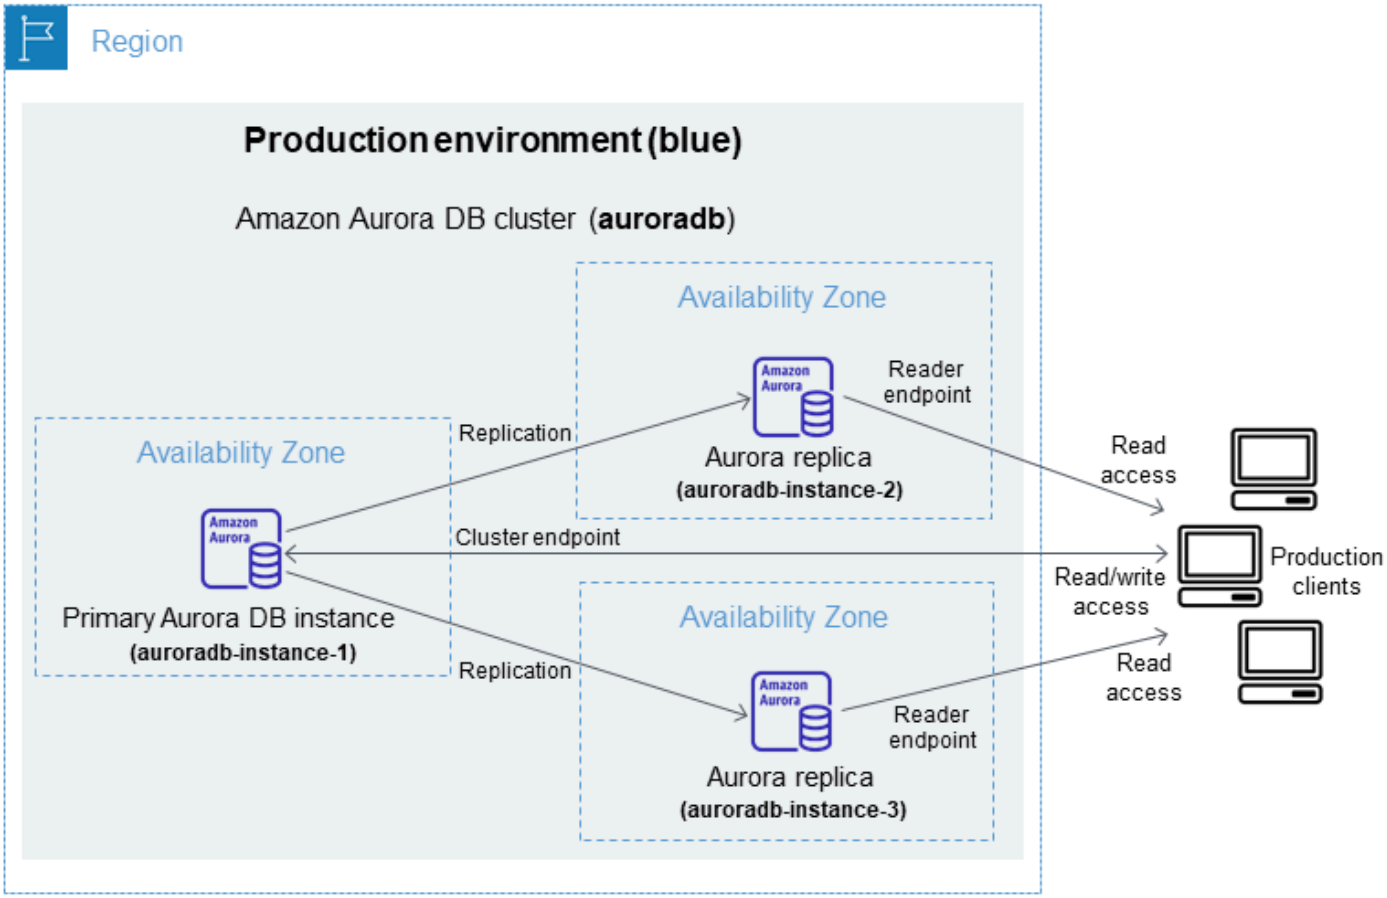

2. Create the blue/green deployment. For instructions, see Creating a blue/green deployment in Amazon Aurora.

   The following image shows an example of a blue/green deployment of the production environment from step 1. While creating the blue/green deployment, RDS copies the complete topology and configuration of the Aurora DB cluster to create the green environment. The names of the copied DB cluster and DB instances are appended with `-green-`*`random-characters`*. The staging environment in the image contains the DB cluster (auroradb-green-*`abc123`*). It also contains the three DB instances in the DB cluster (auroradb-instance1-green-*`abc123`*, auroradb-instance2-green-*`abc123`*, and auroradb-instance3-green-*`abc123`*).

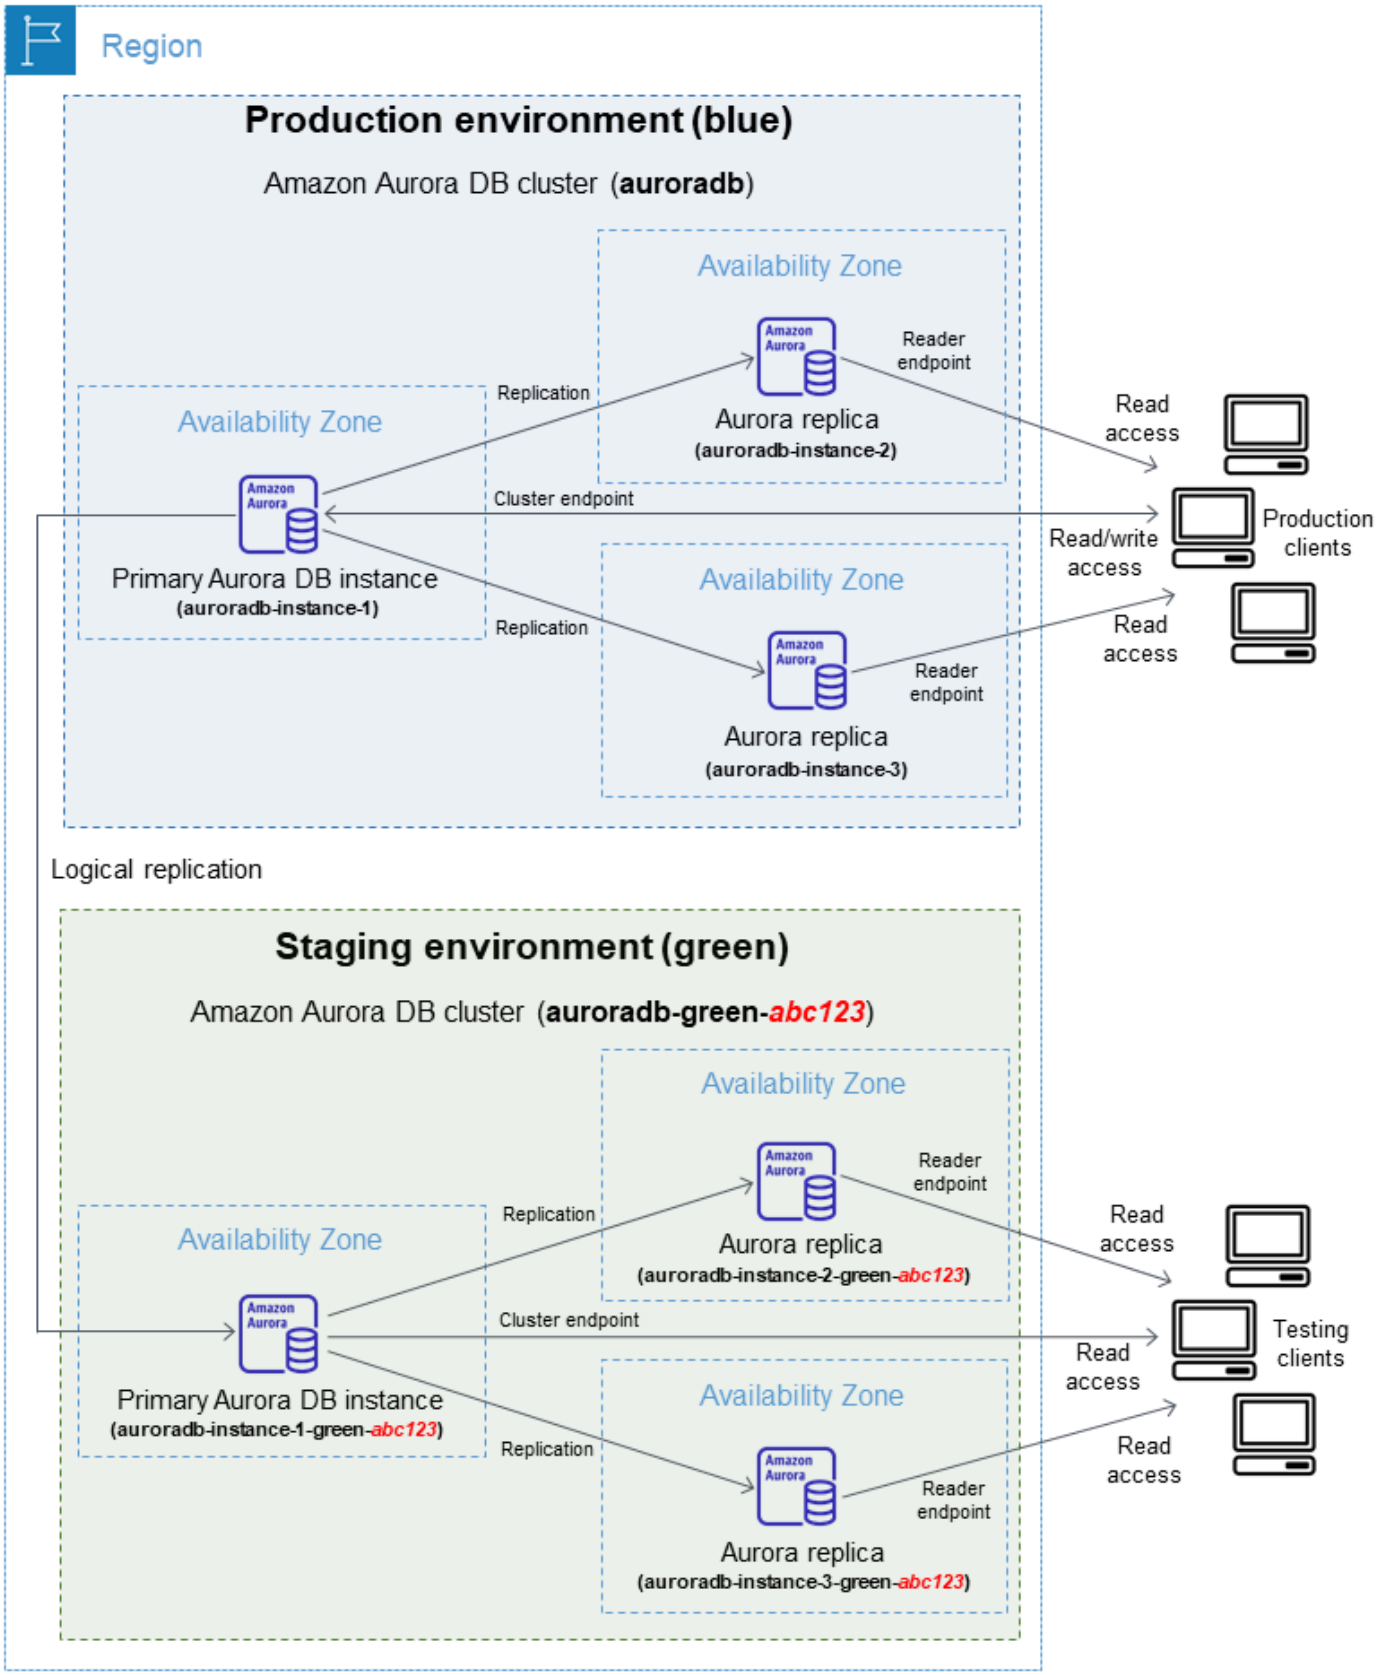
Region
Production environment (blue)
Amazon Aurora DB cluster (auroradb)
Availability Zone
Amazon Aurora
Reader endpoint
Aurora replica
(auroradb-instance-2)
Replication
Availability Zone
Cluster endpoint
Primary Aurora DB instance
(auroradb-instance-1)
Availability Zone
Replication
Amazon Aurora
Reader endpoint
Aurora replica
(auroradb-instance-3)
Read access
Read/write access
Production clients
Read access
Logical replication
Staging environment (green)
Amazon Aurora DB cluster (auroradb-green-abc123)
Availability Zone
Amazon Aurora
Reader endpoint
Aurora replica
(auroradb-instance-2-green-abc123)
Replication
Availability Zone
Cluster endpoint
Primary Aurora DB instance
(auroradb-instance-1-green-abc123)
Availability Zone
Replication
Amazon Aurora
Reader endpoint
Aurora replica
(auroradb-instance-3-green-abc123)
Read access
Read access
Testing clients
Read access

When you create the blue/green deployment, you can specify a higher DB engine version and a different DB cluster parameter group for the DB cluster in the green environment. You can also specify a different DB parameter group for the DB instances in the DB cluster.

RDS also configures replication from the primary DB instance in the blue environment to the primary DB instance in the green environment.

> **Important**
>
> For Aurora MySQL version 3, after you create the blue/green deployment, the DB cluster in the green environment does not allow write operations by default. However, this doesn't apply for users who have the `CONNECTION_ADMIN` privilege, including the Aurora master user. Users with this privilege can override the `read_only` behaviour. For more information, see Role-based privilege model.

3. Make changes to the staging environment.

   For example, you might change the DB instance class used by one or more DB instances in the green environment.

   For information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.


4. Test your staging environment.

   During testing, we recommend that you keep your databases in the green environment read only. Enable write operations on the green environment with caution because they can result in replication conflicts. They can also result in unintended data in the production databases after switchover. To enable write operations for Aurora MySQL, set the `read_only` parameter to `0`, then reboot the DB instance. For Aurora PostgreSQL, set the `default_transaction_read_only` parameter to `off` at the session level. If you need to test your Green environment with Amazon RDS Proxy, you must create a new Amazon RDS Proxy and register the Green cluster with it. This allows you to test the Green environment independently without affecting your production Blue environment traffic. Delete the test proxy once testing is completed.

5. When ready, switch over to transition the staging environment to be the new production environment. For instructions, see Switching a blue/green deployment in Amazon Aurora.

The switchover results in downtime. The downtime is usually under one minute, but it can be longer depending on your workload.

The following image shows the DB clusters after the switchover.

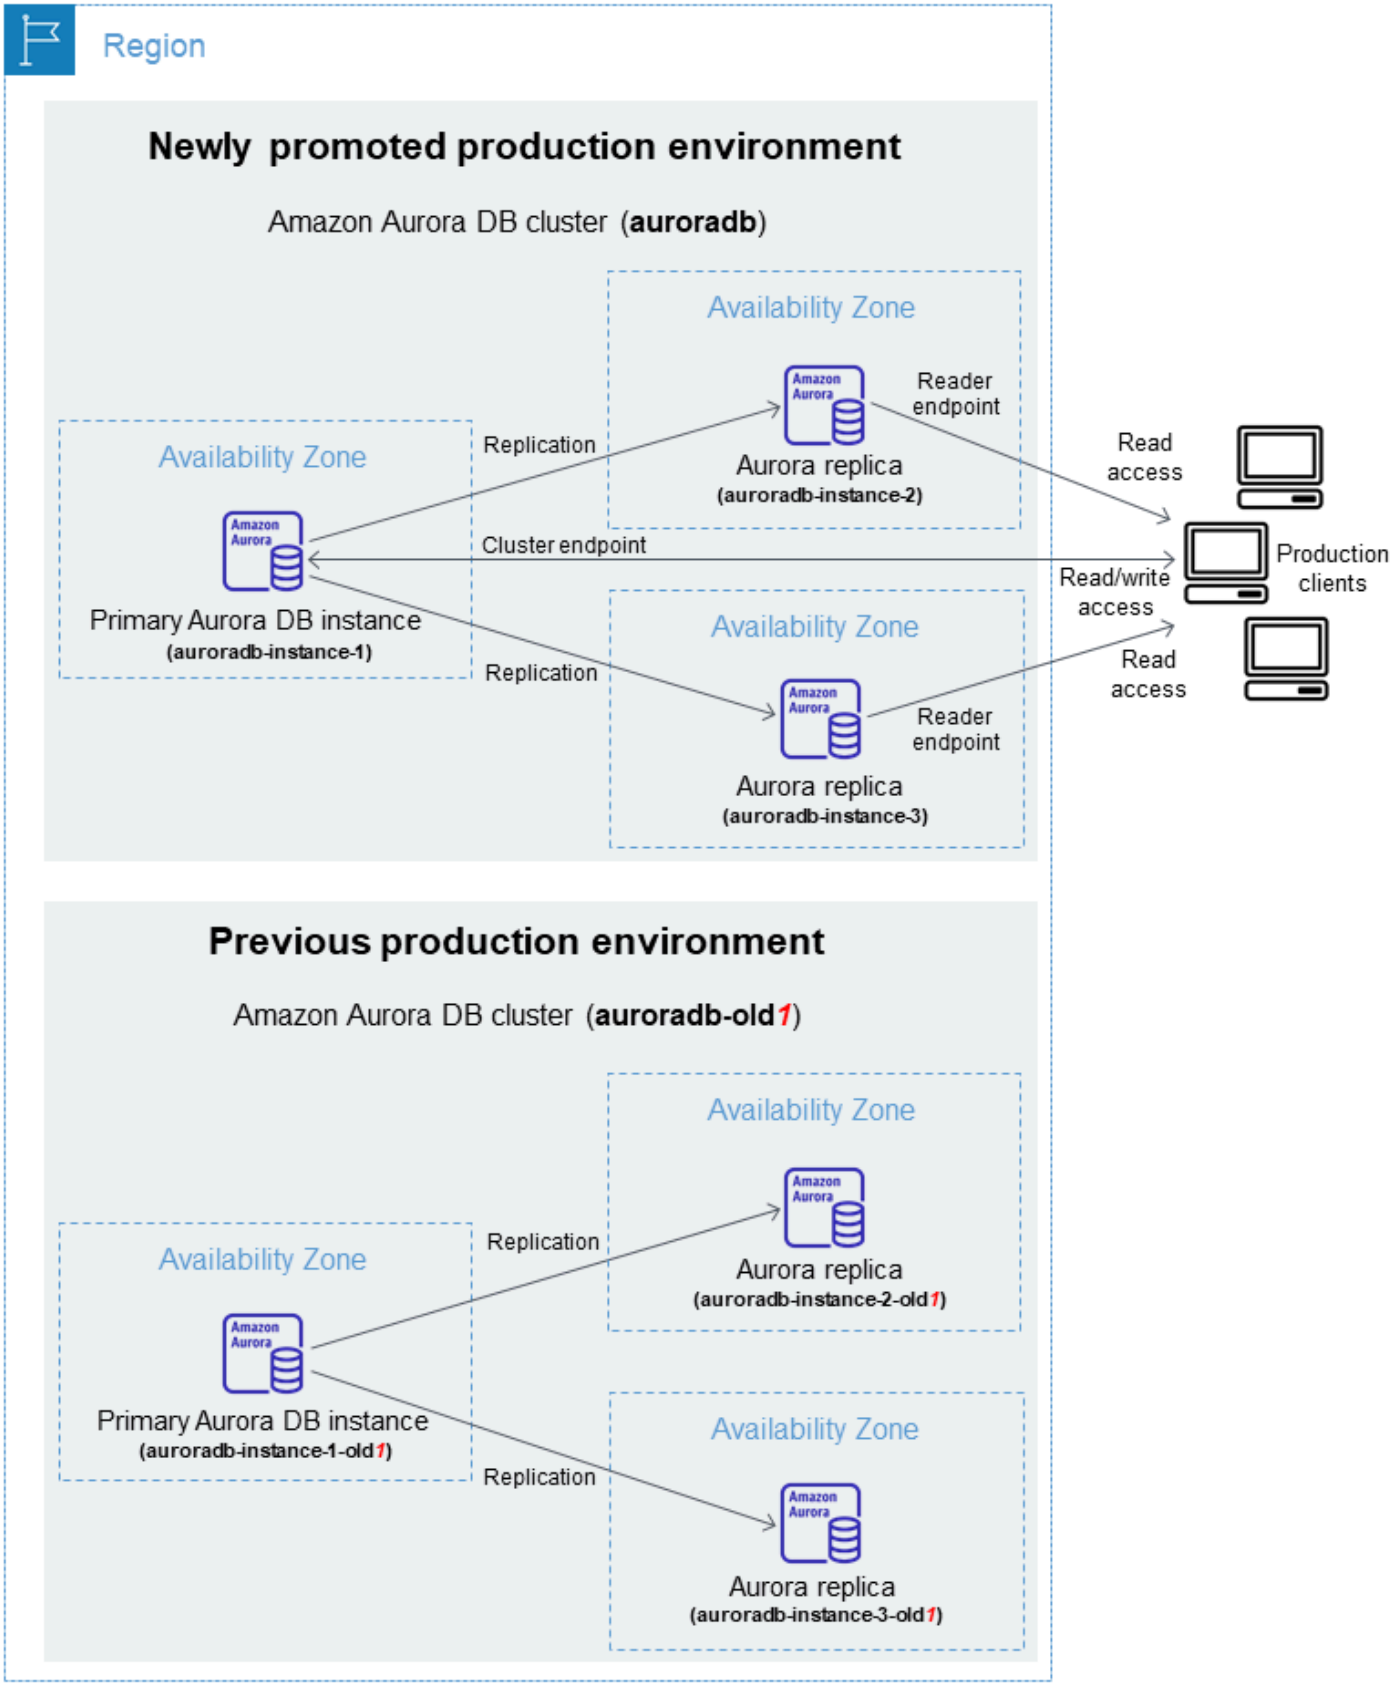
Region
Newly promoted production environment
Amazon Aurora DB cluster (auroradb)
Availability Zone
Availability Zone
Amazon Aurora
Reader endpoint
Replication
Aurora replica
(auroradb-instance-2)
Read access
Cluster endpoint
Production clients
Primary Aurora DB instance
(auroradb-instance-1)
Read/write access
Availability Zone
Replication
Read access
Reader endpoint
Aurora replica
(auroradb-instance-3)
Previous production environment
Amazon Aurora DB cluster (auroradb-old1)
Availability Zone
Availability Zone
Replication
Aurora replica
(auroradb-instance-2-old1)
Primary Aurora DB instance
(auroradb-instance-1-old1)
Availability Zone
Replication
Aurora replica
(auroradb-instance-3-old1)

After the switchover, the Aurora DB cluster in the green environment becomes the new production DB cluster. The names and endpoints in the current production environment are assigned to the newly switched over production environment, requiring no changes to your application. As a result, your production traffic now flows to the new production environment. The DB cluster and DB instances in the blue environment are renamed by appending `-old`*n* to the current name, where *n* is a number. For example, assume the name of the DB instance in the blue environment is `auroradb-instance-1`. After switchover, the DB instance name might be `auroradb-instance-1-old1`.

In the example in the image, the following changes occur during switchover:

- The green environment DB cluster `auroradb-green-abc123` becomes the production DB cluster named `auroradb`.
- The green environment DB instance named `auroradb-instance1-green-abc123` becomes the production DB instance `auroradb-instance1`.
- The green environment DB instance named `auroradb-instance2-green-abc123` becomes the production DB instance `auroradb-instance2`.
- The green environment DB instance named `auroradb-instance3-green-abc123` becomes the production DB instance `auroradb-instance3`.
- The blue environment DB cluster named `auroradb` becomes `auroradb-old1`.
- The blue environment DB instance named `auroradb-instance1` becomes `auroradb-instance1-old1`.
- The blue environment DB instance named `auroradb-instance2` becomes `auroradb-instance2-old1`.
- The blue environment DB instance named `auroradb-instance3` becomes `auroradb-instance3-old1`.

6. If you no longer need a blue/green deployment, you can delete it. For instructions, see Deleting a blue/green deployment in Amazon Aurora.

   After switchover, the previous production environment isn't deleted so that you can use it for regression testing, if necessary.

Authorizing access to Amazon Aurora blue/green deployment operations

Users must have the required permissions to perform operations related to blue/green deployments. You can create IAM policies that grant users and roles permission to perform specific API operations on the specified resources they need. You can then attach those policies to the IAM permission sets or roles that require those permissions. For more information, see Identity and access management for Amazon Aurora.

The user who creates a blue/green deployment must have permissions to perform the following RDS operations:

- `rds:CreateBlueGreenDeployment`
- `rds:AddTagsToResource`
- `rds:CreateDBCluster`
- `rds:CreateDBInstance`
- `rds:CreateDBClusterEndpoint`

The user who switches over a blue/green deployment must have permissions to perform the following RDS operations:

- `rds:SwitchoverBlueGreenDeployment`
- `rds:ModifyDBCluster`
- `rds:PromoteReadReplicaDBCluster`

The user who deletes a blue/green deployment must have permissions to perform the following RDS operations:

- `rds:DeleteBlueGreenDeployment`
- `rds:DeleteDBCluster`
- `rds:DeleteDBInstance`
- `rds:DeleteDBClusterEndpoint`

Aurora provisions and modifies resources in the staging environment on your behalf. These resources include DB instances that use an internally defined naming convention. Therefore,

attached IAM policies can't contain partial resource name patterns such as `my-db-prefix-*`. Only wildcards (*) are supported. In general, we recommend using resource tags and other supported attributes to control access to these resources, rather than wildcards. For more information, see Actions, resources, and condition keys for Amazon RDS.

Additional permissions for Aurora Global Database Blue/Green Deployments

When creating blue/green deployments for Aurora Global Database clusters, in addition to the above listed permission, users need the following permissions to perform operations to manage the global cluster topology.

The user who creates a blue/green deployment must have permissions to perform the following RDS operations:

- `rds:CreateGlobalCluster`

The user who switches over a blue/green deployment must have permissions to perform the following RDS operations:

- `rds:ModifyGlobalCluster`
- `rds:PromoteReadReplicaDBCluster`

The user who deletes a blue/green deployment must have permissions to perform the following RDS operations:

- `rds:DeleteGlobalCluster`

Limitations and considerations for Amazon Aurora blue/green deployments

Blue/green deployments in Amazon RDS require careful consideration of factors such as replication slots, resource management, instance sizing, and potential impacts on database performance. The following sections provide guidance to help you optimize your deployment strategy to ensure minimal downtime, seamless transitions, and effective management of your database environment.

Topics

- Limitations for blue/green deployments
- Aurora Global Database limitations for blue/green deployments
- Considerations for blue/green deployments

Limitations for blue/green deployments

The following limitations apply to blue/green deployments.

Topics

- General limitations for blue/green deployments
- Aurora MySQL limitations for blue/green deployments
- Aurora PostgreSQL limitations for blue/green deployments

General limitations for blue/green deployments

The following general limitations apply to blue/green deployments:

- You can't stop and start a cluster that is part of a blue/green deployment.
- Blue/green deployments don't support managing master user passwords with Amazon Secrets Manager.
- If you attempt to force a backtrack on the blue DB cluster, the blue/green deployment breaks and switchover is blocked.
- During switchover, the blue and green environments can't have zero-ETL integrations with Amazon Redshift. You must delete the integration first and switch over, then recreate the integration.
- The Event Scheduler (`event_scheduler` parameter) must be disabled on the green environment when you create a blue/green deployment. This prevents events from being generated in the green environment and causing inconsistencies.
- Auto Scaling policies configured on the blue DB cluster are not copied to the green environment. You must reconfigured them after switchover, regardless of whether they were initially set up on the blue or green environment.
- You can't change an encrypted DB cluster into an unencrypted DB cluster.
- You can't change a blue DB cluster to a higher engine version than its corresponding green DB cluster.

- The resources in the blue environment and green environment must be in the same Amazon Web Services account.
- If you use Amazon RDS Proxy, you must register your blue cluster with the proxy before creating a blue/green deployment. If a blue/green deployment already exists for a given blue cluster, registering that blue cluster to Amazon RDS Proxy will be blocked.
- Amazon RDS Proxy with blue/green deployments is not supported for Aurora Global Databases.
- Blue/green deployments aren't supported for the following features:
  - Cross-Region read replicas
  - Aurora Serverless v1 DB clusters
  - Amazon CloudFormation
  - Capacity Reservations

    You can't specify a Capacity Reservation when you create a blue/green deployment, and the DB instances in the green environment don't draw from a reservation. For more information about Capacity Reservations, see Amazon Aurora On-Demand Capacity Reservations.
- After you switch over a blue/green deployment, point-in-time recovery (PITR) history doesn't carry over to the new production DB cluster. The green DB cluster keeps its own resource ID. Its earliest restorable time starts when you created the green environment. You can't restore the new production DB cluster to any point in time before that, including any time before switchover. The blue DB cluster keeps its own PITR history and automated backups until you delete it. To restore the blue DB cluster after switchover, use its resource ID (`SourceDbClusterResourceId`), not its name. The name changes during switchover. For more information, see Restoring a DB cluster to a specified time.

Important

Plan for this PITR reset if you have backup retention or recovery point objective (RPO) requirements. The new production DB cluster can't reach a recovery point from before you created the green environment, and its PITR window reaches your full backup retention period only after enough time passes.
To keep the ability to recover to a time before switchover, don't delete the blue DB cluster immediately. Keep the blue DB cluster running for at least the length of your required recovery window. A retained blue DB cluster still incurs charges for its DB instances and storage until you delete it.

Aurora MySQL limitations for blue/green deployments

The following limitations apply to Aurora MySQL blue/green deployments:

- The source DB cluster can't contain any databases named `tmp`. Databases with this name will not be copied to the green environment.
- The blue DB cluster can't be an external binlog replica.
- If the source DB cluster that has backtrack enabled, the green DB cluster is created without backtracking support. This is because backtracking doesn't work with binary log (binlog) replication, which is required for blue/green deployments. For more information, see the section called “Backtracking a DB cluster”.
- Blue/green deployments don't support the Amazon JDBC Driver for MySQL. For more information, see Known Limitations on GitHub.

Aurora PostgreSQL limitations for blue/green deployments

The following limitations apply to Aurora PostgreSQL blue/green deployments.

- Unlogged tables aren't replicated to the green environment unless the `rds.logically_replicate_unlogged_tables` parameter is set to `1` on the blue DB cluster. Don't modify this parameter value after you create a blue/green deployment to avoid possible replication errors on unlogged tables.
- The blue DB cluster can't be a logical source (publisher) or replica (subscriber).
- If the blue DB cluster is configured as the foreign server of a foreign data wrapper (FDW) extension, you must use the cluster endpoint name instead of IP addresses. This allows the configuration to remain functional after switchover.
- In a blue/green deployment, each database requires a logical replication slot. As the number of databases grows, resource overhead increases and can potentially lead to replication lag, especially if the DB cluster isn't sufficiently scaled. The impact depends on factors such as database workload and the number of connections. To mitigate this, consider scaling up your DB instance class or reducing the number of databases on the source cluster.
- Blue/green deployments are supported for Babelfish for Aurora PostgreSQL only for version 15.7 and higher 15 versions, and 16.3 and higher 16 versions.
- If you want to capture execution plans in Aurora Replicas, you must provide the blue DB cluster endpoint when calling the `apg_plan_mgmt.create_replica_plan_capture` function. This

ensures that plan captures continue to work after switchover. For more information, see the section called “Capturing Aurora PostgreSQL execution plans in Replicas”.

- The logical replication apply process in the green environment is single-threaded. If the blue environment generates a high volume of write traffic, the green environment might not be able to keep up. This can lead to replication lag or failure, especially for workloads that produce continuous high write throughput. Make sure to test your workloads thoroughly. For scenarios that require major version upgrades and handling high-volume write workloads, consider alternative approaches such as using Amazon Database Migration Service (Amazon DMS) or self-managed logical replication.
- Creating new partitions on partitioned tables isn't supported during blue/green deployments for Aurora. Creating new partitions involves data definition language (DDL) operations such as `CREATE TABLE`, which aren't replicated from the blue environment to the green environment. However, existing partitioned tables and their data will be replicated to the green environment.
- The following limitations apply to PostgreSQL extensions:
  - The `pg_partman` extension must be disabled in the blue environment when you create a blue/green deployment. The extension performs DDL operations such as `CREATE TABLE`, which break logical replication from the blue environment to the green environment.
  - The `pg_cron` extension must remain disabled on all green databases after the blue/green deployment is created. The extension has background workers that run as superuser and bypass the read-only setting of the green environment, which might cause replication conflicts.
  - The `apg_plan_mgmt` extension must have the `apg_plan_mgmt.capture_plan_baselines` parameter set to `off` on all green databases to avoid primary key conflicts if an identical plan is captured in the blue environment. For more information, see the section called “Overview of Aurora PostgreSQL query plan management”.
  - The `pglogical` and `pgactive` extensions must be disabled on the blue environment when you create a blue/green deployment. After you switch over the green environment to be the new production environment, you can enable the extensions again. In addition, the blue database can’t be a logical subscriber of an external instance.
  - If you're using the `pgAudit` extension, it must remain in the shared libraries (`shared_preload_libraries`) on the custom DB parameter groups for both the blue and the green DB instances. For more information, see the section called “Setting up the pgAudit extension”.

Logical replication-specific limitations for blue/green deployments

PostgreSQL has certain restrictions related to logical replication, which translate to limitations when creating blue/green deployments for Aurora PostgreSQL DB clusters.

The following table describes logical replication limitations that apply to blue/green deployments for Aurora PostgreSQL. For more information, see Restrictions in the PostgreSQL logical replication documentation.

Limitation	Explanation
Data definition language (DDL) statements, such as `CREATE TABLE` and `CREATE SCHEMA`, aren't replicated from the blue environment to the green environment.	If Aurora detects a DDL change in the blue environment, your green databases enter a state of **Replication degraded**. You must delete the blue/green deployment and all green databases, then recreate it.
Data control language (DCL) statements, such as `GRANT`, `REVOKE`, and `ALTER DEFAULT PRIVILEGES`, aren't replicated from the blue environment to the green environment.	If Aurora detects a DCL statement in the blue environment, your green databases enter a state of **Replication degraded** and switchover is blocked, the same as for a DDL change. You must delete the blue/green deployment and all green databases, then recreate it. A warning also appears in the PostgreSQL log. No configuration or API is available to change this behavior, because it is a limitation of the blue/green deployment process.

Limitation	Explanation
NEXTVAL operations on sequence objects aren't synchronized between the blue environment and the green environment.	During switchover, Aurora increments sequence values in the green environment to match those in the blue environment. While a high volume of sequences generally allows the switchover to proceed, an exceptionally large number—such as several hundred thousand—might cause the process to time out before completion. You can increase the switchover timeout to allow more time for synchronization. For more information, see the section called “Switchover timeout”.
Large objects in the blue environment aren't replicated to the green environment. This includes both existing large objects and any newly created or modified large objects during the blue/green deployment process.	If Aurora detects the creation or modification of large objects in the blue environment that are stored in the `pg_largeobject` system table, your green databases enter a state of **Replication degraded**. You must delete the blue/green deployment and all green databases, then recreate it.

Limitation	Explanation
Materialized views aren't automatically refreshed in the green environment.	Refreshing materialized views in the blue environment doesn't refresh them in the green environment. After switchover, you can manually refresh them using the REFRESH MATERIALIZED VIEW command, or schedule a refresh. On Aurora PostgreSQL versions earlier than 13.20, 14.17, 15.12, 16.8, and 17.4, Aurora treats a materialized view refresh in the blue environment as a data definition language (DDL) change. Your green databases enter a state of **Replication degraded**, and Aurora blocks the switchover. On these versions, don't refresh materialized views in the blue environment while the blue/green deployment exists. If replication is already degraded, you must delete the blue/green deployment and all green databases, then recreate it.
UPDATE and DELETE operations aren't permitted on tables that don't have a primary key.	Before you create a blue/green deployment, make sure that all tables have a primary key or use `REPLICA IDENTITY FULL`. However, only use `REPLICA IDENTITY FULL` if no primary or unique key exists, as it affects replication performance. Without a unique key, the entire row becomes the identity. As a result, replicas must scan and compare all columns to find target rows instead of using an efficient key-based lookup. `REPLICA IDENTITY FULL` also generates larger write-ahead log (WAL) records because it logs the old values of all columns in the row. For more informati on, see the PostgreSQL documentation.

Aurora Global Database limitations for blue/green deployments

In addition to the above stated general and engine specific limitations, the following limitations apply for blue/green deployments for Aurora Global Database:

- All operations must be initiated from the same Region as the writer cluster of the Global Database.
- Performing a global switchover or a global failover will cause active blue/green deployment to become invalid. The blue-green deployment need to be deleted and recreated from the new primary region.
- For Aurora PostgreSQL, if you have global write forwarding enabled in your production environment and create a blue/green deployment, write forwarding is disabled on the green cluster. It is enabled in the green environment only after the blue/green switchover when

the green environment becomes the new production environment. After switchover, write forwarding is disabled on the `-old1` cluster.

- Modifying to the topology of the global database after the creation of the blue/green deployment will cause the active blue/green deployment to become invalid. The blue-green deployment would have to be deleted and recreated from the new primary region.
- Automated snapshots are retained per the backup retention days that was originally configured in old blue environment. Automated snapshots from old blue cluster are not copied to green.
- Global failover is supported during a blue/green switchover but a global switchover is not supported during a blue/green switchover.
- Ensure DB cluster and DB parameter groups for the green environment exist in all secondary regions with identical names. If the parameter group in any region is unavailable, the default parameter group in the regions is used.
- Avoid using RDS Proxy on any global database members during blue/green deployment switchover.

Considerations for blue/green deployments

Amazon RDS tracks resources in blue/green deployments with the `DbiResourceId` and `DbClusterResourceId` of each resource. This resource ID is an Amazon Web Services Region-unique, immutable identifier for the resource.

The *resource* ID is separate from the DB *cluster* ID. Each one is listed in the database configuration in the RDS console.

The name (cluster ID) of a resource changes when you switch over a blue/green deployment, but each resource keeps the same resource ID. For example, a DB cluster identifier might have been `mycluster` in the blue environment. After switchover, the same DB cluster might be renamed to `mycluster-old1`. However, the resource ID of the DB cluster doesn't change during switchover. So, when you switch over the green resources to be the new production resources, their resource IDs don't match the blue resource IDs that were previously in production.

After you switch over a blue/green deployment, consider updating the resource IDs to those of the newly transitioned production resources for integrated features and services that you used with the production resources. Specifically, consider the following updates:

- If you perform filtering using the RDS API and resource IDs, adjust the resource IDs used in filtering after switchover.

- If you use CloudTrail for auditing resources, adjust the consumers of the CloudTrail to track the new resource IDs after switchover. For more information, see Monitoring Amazon Aurora API calls in Amazon CloudTrail.
- If you use Database Activity Streams for resources in the blue environment, adjust your application to monitor database events for the new stream after switchover. For more information, see Supported Regions and Aurora DB engines for database activity streams.
- If you use the Performance Insights API, adjust the resource IDs in calls to the API after switchover. For more information, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

  You can monitor a database with the same name after switchover, but it doesn't contain the data from before the switchover.
- If you use resource IDs in IAM policies, make sure you add the resource IDs of the newly transitioned resources when necessary. For more information, see Identity and access management for Amazon Aurora.
- If you have IAM roles associated with your DB cluster, make sure to reassociate them after switchover. Attached roles aren't automatically copied to the green environment.
- If you authenticate to your DB cluster using IAM database authentication, make sure that the IAM policy used for database access has both the blue and the green databases listed under the `Resource` element of the policy. This is required in order to connect to the green database after switchover. For more information, see the section called "Creating and using an IAM policy for IAM database access".
- If you want to restore a manual DB cluster snapshot for a DB cluster that was part of a blue/green deployment, make sure you restore the correct DB cluster snapshot by examining the time when the snapshot was taken. For more information, see Restoring from a DB cluster snapshot.
- After you switch over, Amazon Database Migration Service (Amazon DMS) replication tasks can't resume because the checkpoint from the blue environment is invalid in the green environment. You must recreate the DMS task with a new checkpoint to continue replication.
- Amazon Aurora creates the green environment by *cloning* the underlying Aurora storage volume in the blue environment. The green cluster volume only stores incremental changes made to the green environment. If you delete the DB cluster in the blue environment, the size of the underlying Aurora storage volume in the green environment grows to the full size. For more information, see the section called "Cloning a volume for an Aurora DB cluster".
- When you add a DB instance to the DB cluster in the green environment of a blue/green deployment, the new DB instance won't replace a DB instance in the blue environment when

you switch over. However, the new DB instance is retained in the DB cluster and becomes a DB instance in the new production environment.

- When you delete a DB instance in the DB cluster in the green environment of a blue/green deployment, you can't create a new DB instance to replace it in the blue/green deployment.

  If you create a new DB instance with the same name and ARN as the deleted DB instance, it has a different `DbiResourceId`, so it isn't part of the green environment.

  The following behavior results if you delete a DB instance in the DB cluster in the green environment:

  - If the DB instance in the blue environment with the same name exists, it won't be switched over to the DB instance in the green environment. This DB instance won't be renamed by appending `-old`*n* to the DB instance name.
  - Any application that points to the DB instance in the blue environment continues to use the same DB instance after switchover.
- If you use resource tags for access control or operational management, you need to understand that tag changes aren't synchronized between blue and green environments until switchover. When you create a blue/green deployment, tags from the blue environment are copied to the green environment. After creation, any tag modifications that you make to either environment aren't automatically synchronized. During switchover, blue environment tags replace all tags in the green environment. Apply all necessary tags to the blue environment before you create the blue/green deployment, or reapply required tags to the new production environment after switchover. For more information about tags, see Tagging Amazon Aurora andAmazon RDS resources.
- **Encrypting the green environment**

  You can create a green environment whose storage is encrypted with a different Amazon KMS key than the blue environment. Use this to encrypt an unencrypted DB cluster or one that uses an Amazon owned key, or to change the KMS key of an encrypted DB cluster. To do so, specify `TargetKmsKeyId` in TargetResourceConfigurations when you create the blue/green deployment. Set the `SourceArn` to the ARN of the source DB cluster. Aurora applies the key at the DB cluster level, so you don't specify it for individual DB instances.

  - The KMS key must exist and be enabled, and you must have permission to use it.
  - `TargetResourceConfigurations` isn't supported for Aurora Global Databases, so you can't change the encryption of the green environment for a Global Database.

Best practices for Amazon Aurora blue/green deployments

The following are best practices for blue/green deployments.

Topics

- General best practices for blue/green deployments
- Aurora MySQL best practices for blue/green deployments
- Aurora PostgreSQL best practices for blue/green deployments
- Aurora Global Database best practices for blue/green deployments

General best practices for blue/green deployments

Consider the following general best practices when you create a blue/green deployment.

- Thoroughly test the Aurora DB cluster in the green environment before switching over.
- Keep your databases in the green environment read only. We recommend that you enable write operations on the green environment with caution because they can result in replication conflicts. They can also result in unintended data in the production databases after switchover.
- If you use a blue/green deployment to implement schema changes, make only replication-compatible changes.

  For example, you can add new columns at the end of a table without disrupting replication from the blue deployment to the green deployment. However, schema changes, such as renaming columns or renaming tables, break replication to the green deployment.

  For more information about replication-compatible changes, see Replication with Differing Table Definitions on Source and Replica in the MySQL documentation and Restrictions in the PostgreSQL logical replication documentation.
- Use the cluster endpoint, reader endpoint, or custom endpoint for all connections in both environments. Don't use instance endpoints or custom endpoints with static or exclusion lists.
- When you switch over a blue/green deployment, follow the switchover best practices. For more information, see the section called “Switchover best practices”.

Aurora MySQL best practices for blue/green deployments

Consider the following best practices when you create a blue/green deployment from an Aurora MySQL DB cluster.

- If the green environment experiences replica lag, consider the following:
  - Disable binary log retention if it's not needed, or temporarily disable it until replication catches up. To do so, set the `binlog_format` DB cluster parameter back to `0` and reboot the green writer DB instance.
  - Temporarily set the `innodb_flush_log_at_trx_commit` parameter to `0` in the green DB parameter group. After replication catches up, revert to the default value of `1` before switchover. If an unexpected shutdown or crash occurs with the temporary parameter value, rebuild the green environment to avoid undetected data corruption. For more information, see the section called “Configuring how frequently the log buffer is flushed”.

Aurora PostgreSQL best practices for blue/green deployments

Consider the following best practices when you create a blue/green deployment from an Aurora PostgreSQL DB cluster.

- Monitor the Aurora PostgreSQL logical replication write-through cache and make adjustments to the cache buffer if necessary. For more information, see the section called “Monitoring the logical replication write-through cache”.
- Increase the value of the `logical_decoding_work_mem` DB parameter in the blue environment. Doing so allows for less decoding on disk and instead uses memory. For more information, see the section called “Adjusting working memory for logical decoding”.
  - You can monitor transaction overflow being written to disk using the `ReplicationSlotDiskUsage` CloudWatch metric. This metric offers insights into the disk usage of replication slots, helping identify when transaction data exceeds memory capacity and is stored on disk. You can monitor freeable memory with the `FreeableMemory` CloudWatch metric. For more information, see the section called “Instance-level metrics for Amazon Aurora”.
  - In Aurora PostgreSQL version 14 and higher, you can monitor the size of logical overflow files using the `pg_stat_replication_slots` system view.
- Update all of your PostgreSQL extensions to the latest version before you create a blue/green deployment. For more information, see the section called “Upgrading PostgreSQL extensions”.

- If you're using the `aws_s3` extension, give the green DB cluster access to Amazon S3 through an IAM role after the green environment is created. This allows the import and export commands to continue functioning after switchover. For instructions, see the section called "Setting up access to an Amazon S3 bucket".
- If you specify a higher engine version for the green environment, run the `ANALYZE` operation on all databases to refresh the `pg_statistic` table. Optimizer statistics aren't transferred during a major version upgrade, so you must regenerate all statistics to avoid performance issues. For additional best practices during major version upgrades, see the section called "Performing a major version upgrade".
- Avoid configuring triggers as `ENABLE REPLICA` or `ENABLE ALWAYS` if the trigger is used on the source to manipulate data. Otherwise, the replication system propagates changes and executes the trigger, which leads to duplication.
- Long-running transactions can cause significant replica lag. To reduce replica lag, consider doing the following:
  - Reduce long-running transactions and subtransactions that can be delayed until after the green environment catches up to the blue environment.
  - Reduce bulk operations on the blue environment until after the green environment catches up to the blue environment.
  - Initiate a manual vacuum freeze operation on busy tables prior to creating the blue/green deployment. For instructions, see Performing a manual vacuum freeze.
  - In PostgreSQL version 12 and higher, disable the `index_cleanup` parameter on large or busy tables to improve the efficiency of regular maintenance on blue databases. For more information, see Vacuuming a table as quickly as possible.

    Note

    Regularly skipping index cleanup during vacuuming can lead to index bloat, which might degrade scan performance. As a best practice, use this approach only while using a blue/green deployment. Once the deployment is complete, we recommend resuming regular index maintenance and cleanup.

  - Replica lag can occur if the blue and green DB instances are undersized for the workload. Ensure that your DB instances are not reaching their resource limits for the instance type. For more information, see the section called "Analyze resource usage with CloudWatch metrics".

- Slow replication can cause senders and receivers to restart often, which delays synchronization. To ensure that they remain active, disable timeouts by setting the `wal_sender_timeout` parameter to `0` in the blue environment, and the `wal_receiver_timeout` parameter to `0` in the green environment.
- Review the performance of your UPDATE and DELETE statements and evaluate whether creating an index on the column used in the WHERE clause can optimize these queries. This can enhance performance when the operations are replayed in the green environment. For more information, see the section called “Check predicate filters for queries that generate waits”.
- If you're using triggers, make sure they don't interfere with the creating, updating, and dropping of `pg_catalog.pg_publication`, `pg_catalog.pg_subscription`, and `pg_catalog.pg_replication_slots` objects whose names start with 'rds'.
- If Babelfish is enabled on the source DB cluster, the following parameters must have the same settings in the target DB cluster parameter group for the green environment as in the source DB cluster parameter group:
  - rds.babelfish_status
  - babelfishpg_tds.tds_default_numeric_precision
  - babelfishpg_tds.tds_default_numeric_scale
  - babelfishpg_tsql.default_locale
  - babelfishpg_tsql.migration_mode
  - babelfishpg_tsql.server_collation_name

  For more information about these parameters, see the section called “DB cluster parameter group settings for Babelfish ”.

Aurora Global Database best practices for blue/green deployments

In addition to the above listed general and engine specific best practices, consider the following best practices for Aurora Global Database.

- Monitor the following CloudWatch metrics to identify periods of low activity in your production environment:
  - `DatabaseConnections`
  - `ActiveTransactions`

Schedule the blue/green switchover during your planned maintenance window or during a period of low activity.

- Blue/Green switchover duration varies based on your workload and the number of secondary regions. When you initiate a blue/green switchover, the service waits for replica lag to reach zero before proceeding. We recommend checking replica lag before initiating a switchover.
- If you intend to use a DB parameter or DB Cluster parameter group other than the default one for your green environment, create the desired parameter group with the same name in all secondary regions before initiating the blue/green deployment.

Creating a blue/green deployment in Amazon Aurora

RDS copies the blue environment's topology and features to a staging area. If the blue DB instance has read replicas, they are copied as replicas of the green instance. The allocated storage of all green replicas matches the green primary instance, while other storage parameters are inherited from the blue replicas.

When you create a blue/green deployment, you specify the DB cluster to copy in the deployment. The DB cluster you choose is the production DB cluster, and it becomes the DB cluster in the blue environment. RDS copies the blue environment's topology to a staging area, along with its configured features. The DB cluster is copied to the green environment, and RDS configures replication from the DB cluster in the blue environment to the DB cluster in the green environment. RDS also copies all of the DB instances in the DB cluster.

Topics

- Preparing for a blue/green deployment
- Specifying changes when creating a blue/green deployment
- Creating a blue/green deployment
- Settings for creating blue/green deployments

Preparing for a blue/green deployment

There are certain steps you must take before you create a blue/green deployment, depending on the engine that your Aurora DB cluster is running.

Topics

- Preparing an Aurora MySQL DB cluster for a blue/green deployment
- Preparing an Aurora PostgreSQL DB cluster for a blue/green deployment
- Preparing an Aurora Global Database DB cluster for a blue/green deployment

Preparing an Aurora MySQL DB cluster for a blue/green deployment

Before you create a blue/green deployment for an Aurora MySQL DB cluster, the cluster must be associated with a custom DB cluster parameter group with binary logging (`binlog_format`) turned on. Binary logging is required for replication from the blue environment to the green environment. While any binlog format works, we recommend `ROW` to reduce the risk of replication inconsistencies. For information about creating a custom DB cluster parameter group and setting parameters, see the section called "DB cluster parameter groups".

> **Note**
>
> Enabling binary logging increases the number of write disk I/O operations to the DB cluster. You can monitor IOPS usage with the `VolumeWriteIOPs` CloudWatch metric.

After you enable binary logging, make sure to reboot the DB cluster so that your changes take effect. Blue/green deployments *require* that the writer instance be in sync with the DB cluster parameter group, otherwise creation fails. For more information, see Rebooting a DB instance within an Aurora cluster.

In addition, we recommend changing the binary log retention period to a value other than `NULL` to prevent binary log files from being purged. For more information, see the section called "Setting and showing binary log configuration".

If you use Amazon RDS Proxy, your blue cluster must already be a target of the proxy before you create the blue/green deployment. You cannot register a blue cluster as a target to an Amazon RDS Proxy after a blue/green deployment has been created for that cluster.

Preparing an Aurora PostgreSQL DB cluster for a blue/green deployment

Before you create a blue/green deployment for an Aurora PostgreSQL DB cluster, make sure to do the following.

- Associate the cluster with a custom DB cluster parameter group that has logical replication (`rds.logical_replication`) enabled. Logical replication is required for replication from the blue environment to the green environment.

  When you enable logical replication, you also need to tune certain cluster parameters, such as `max_replication_slots`, `max_logical_replication_workers`, and `max_worker_processes`. For instructions to enable logical replication and tune these parameters, see the section called "Setting up logical replication".

  In addition, make sure that the `synchronous_commit` parameter is set to on.

  After you configure the required parameters, reboot the DB cluster so that your changes take effect. Blue/green deployments *require* that the writer instance be in sync with the DB cluster parameter group, otherwise creation fails. For more information, see Rebooting a DB instance within an Aurora cluster.
- Confirm that your DB cluster is running a version of Aurora PostgreSQL that's compatible with Blue/Green Deployments. For a list of compatible versions, see the section called "Blue/Green Deployments with Aurora PostgreSQL".
- Make sure that all tables in the DB cluster have a primary key. PostgreSQL logical replication doesn't allow UPDATE or DELETE operations on tables that don't have a primary key.
- If you use Amazon RDS Proxy, your blue cluster must already be a target of the proxy before you create the blue/green deployment. You cannot add a blue cluster to an Amazon RDS Proxy after a blue/green deployment has been created for that cluster.

Preparing an Aurora Global Database DB cluster for a blue/green deployment

Before creating a blue/green deployment for your Aurora Global Database DB cluster, note the following points:

- All operations must be initiated from the same Region as the writer cluster of the Global Database.
- Parameter group configuration:
  - The Green environment uses either a new parameter group you specify or the same parameter group as the blue cluster (default).
  - Custom parameter groups are copied to the green environment.

- If a specified parameter group doesn't exist in the secondary region, the default parameter group in the secondary region is used for the green environment.

Specifying changes when creating a blue/green deployment

You can make the following changes to the DB cluster in the green environment when you create the blue/green deployment.

You can make other modifications to the DB cluster and its DB instances in the green environment after it is deployed. For example, you might specify a higher engine version or a different parameter group.

For information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

Topics

- Specify a higher engine version
- Specify a different DB parameter group

Specify a higher engine version

You can specify a higher engine version if you want to test a DB engine upgrade. Upon switchover, the database is upgraded to the major or minor DB engine version that you specify.

Specify a different DB parameter group

Specify a DB cluster parameter group that is different from the one used by the DB cluster. You can test how parameter changes affect the DB cluster in the green environment or specify a parameter group for a new major DB engine version in the case of an upgrade.

If you specify a different DB cluster parameter group, the specified parameter group is associated with the DB cluster in the green environment. If you don't specify a different DB cluster parameter group, the DB cluster in the green environment is associated with the same parameter group as the blue DB cluster.

Creating a blue/green deployment


You can create a blue/green deployment using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To create a blue/green deployment

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB cluster that you want to copy to a green environment.
3. Choose **Actions**, **Create blue/green deployment**.

   The **Create blue/green deployment** page appears.

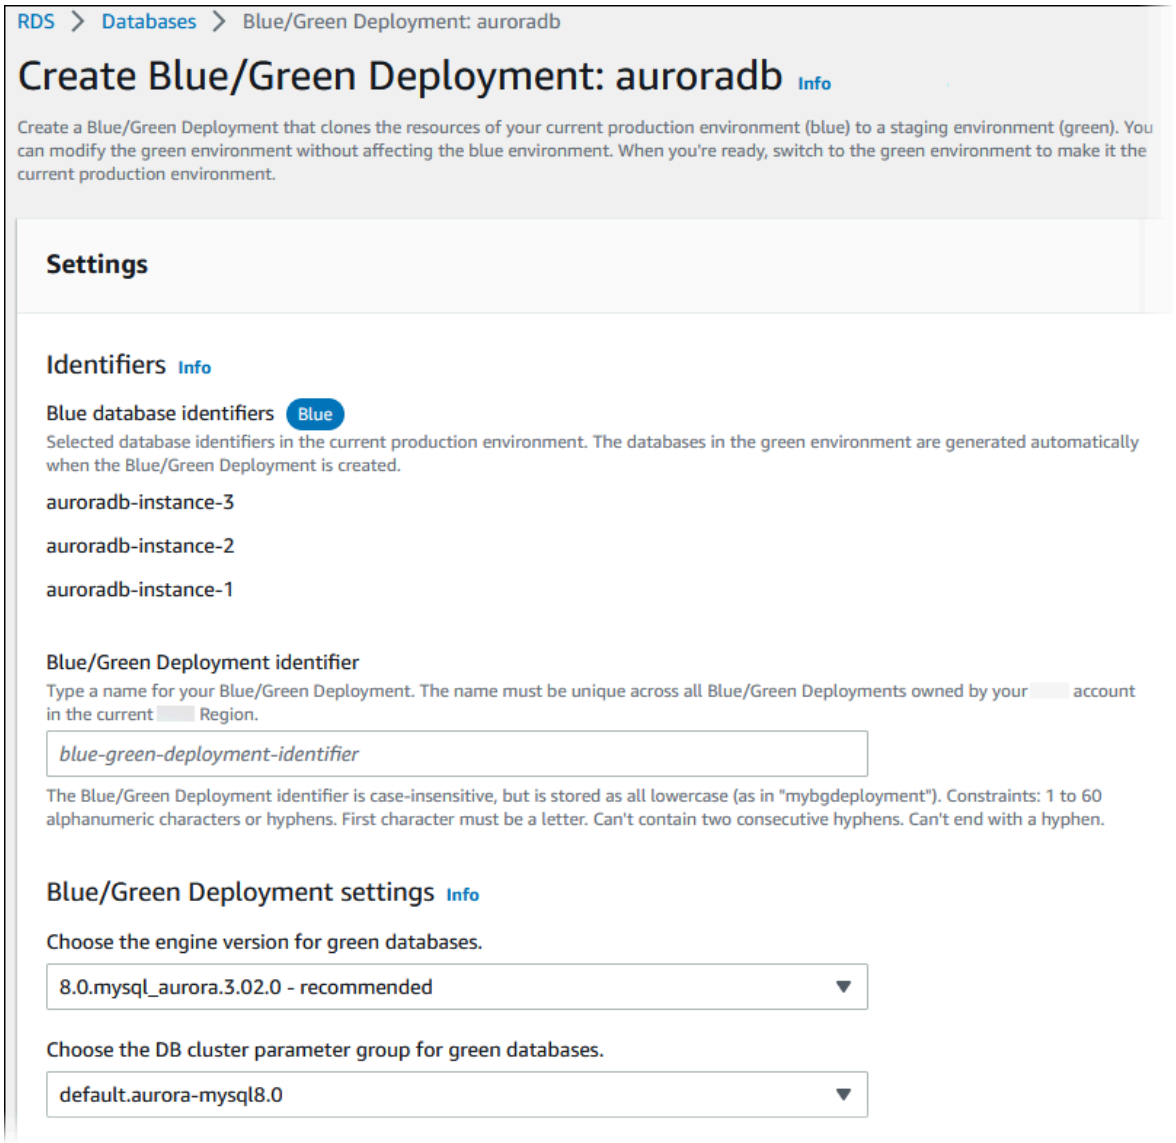

4. Review the blue database identifiers. Make sure that they match the DB instances that you expect in the blue environment. If they don't, choose **Cancel**.

5. For **Blue/green deployment name**, enter a name for your blue/green deployment.
6. In the remaining sections, specify the settings for the green environment. For information about each setting, see the section called "Available settings".

   You can make other modifications to the databases in the green environment after it is deployed.
7. Choose **Create**.

Amazon CLI

To create a blue/green deployment using the Amazon CLI, use the create-blue-green-deployment command. For information about all available options, see the section called "Available settings".

Example

For Linux, macOS, or Unix:

```
aws rds create-blue-green-deployment \
    --blue-green-deployment-name aurora-blue-green-deployment \
    --source arn:aws:rds:us-east-2:123456789012:cluster:auroradb \
    --target-engine-version 8.0 \
    --target-db-cluster-parameter-group-name mydbclusterparametergroup
```

For Windows:

```
aws rds create-blue-green-deployment ^
    --blue-green-deployment-name aurora-blue-green-deployment ^
    --source arn:aws:rds:us-east-2:123456789012:cluster:auroradb ^
    --target-engine-version 8.0 ^
    --target-db-cluster-parameter-group-name mydbclusterparametergroup
```

To create a blue/green deployment for an Aurora Global Database, specify the global cluster ARN for `--source`. The global cluster ARN doesn't include an Amazon Web Services Region. Run the command in the same Amazon Web Services Region as the writer cluster of the Global Database.

Example

For Linux, macOS, or Unix:

```
aws rds create-blue-green-deployment \
    --region us-east-2 \
```

```
    --blue-green-deployment-name aurora-global-blue-green-deployment \
    --source arn:aws:rds::123456789012:global-cluster:my-aurora-global-cluster-1 \
    --target-engine-version 8.0 \
    --target-db-cluster-parameter-group-name mydbclusterparametergroup
```

For Windows:

```
aws rds create-blue-green-deployment ^
    --region us-east-2 ^
    --blue-green-deployment-name aurora-global-blue-green-deployment ^
    --source arn:aws:rds::123456789012:global-cluster:my-aurora-global-cluster-1 ^
    --target-engine-version 8.0 ^
    --target-db-cluster-parameter-group-name mydbclusterparametergroup
```

RDS API

To create a blue/green deployment by using the Amazon RDS API, use the `CreateBlueGreenDeployment` operation. For information about each option, see the section called "Available settings".

Settings for creating blue/green deployments

The following table explains the settings that you can choose when you create a blue/green deployment. For more information about the Amazon CLI options, see create-blue-green-deployment. For more information about the RDS API parameters, see CreateBlueGreenDeployment.

Console setting	Setting description	CLI option and RDS API parameter

Blue/Green Deployment identifier	A name for the blue/green deployment.	**CLI option:**
		`--blue-green-deployment-name`
		API parameter:
		`BlueGreenDeploymentName`

Blue database identifier	The identifier of the cluster that you want to copy to the green environment. When using the CLI	**CLI option:** `--source`

Console setting	Setting description	CLI option and RDS API parameter
	or API, specify the cluster Amazon Resource Name (ARN). For an Aurora Global Database, specify the global cluster ARN instead of the ARN of the primary DB cluster. For the global cluster ARN format, see the section called "Constructing an ARN".	**API parameter:** `Source`

DB cluster parameter group for green databases	A parameter group to associate with the databases in the green environment.	**CLI option:**
		`--target-db-cluster-parameter-group-name`
		API parameter:
		`TargetDBClusterParameterGroupName`

Engine version for green databases	Upgrade the cluster in the green environment to the specified DB engine version.
	If you choose an Aurora PostgreSQL DB cluster, review and acknowledge the logical replication limitations. For more information, see the section called "Logical replication-specific limitations for blue/green deployments".
		CLI option:
		`--target-engine-version`
		RDS API parameter:
		`TargetEngineVersion`

Viewing a blue/green deployment in Amazon Aurora


You can view the details about a blue/green deployment using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

You can also view and subscribe to events for information about a blue/green deployment. For more information, see Blue/green deployment events.

Console

To view the details about a blue/green deployment


1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then find the blue/green deployment in the list.

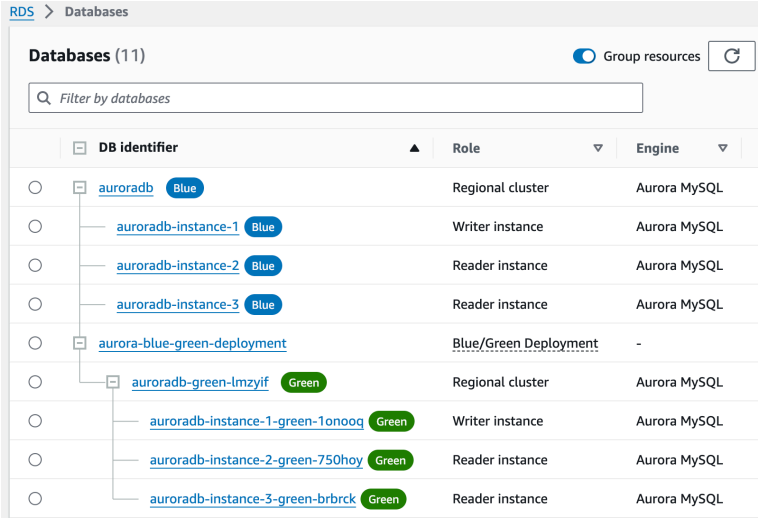

   The **Role** value for the blue/green deployment is **Blue/Green Deployment**.
3. Choose the name of blue/green deployment that you want to view to display its details.

   Each tab has a section for the blue deployment and a section for the green deployment. For example, on the **Configuration** tab, the DB engine version might be different in the blue environment and in the green environment if you're upgrading the DB engine version in the green environment.


   The following image shows an example of the **Connectivity & security** tab:

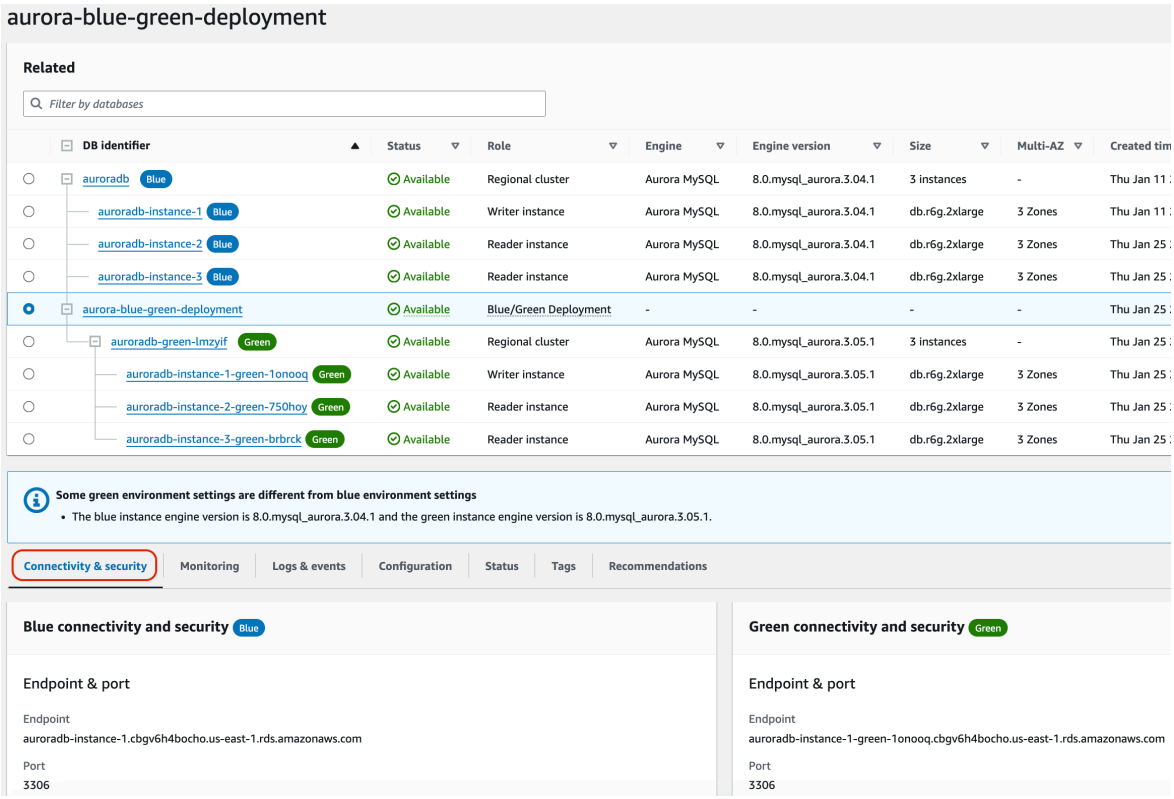


The **Connectivity & security** tab also includes a section called **Replication**, which shows the current state of replication and replica lag between the blue and green environments. If the replication state is `Replicating`, the blue/green deployment is replicating successfully.

For Aurora PostgreSQL blue/green deployments, the replication state can change to `Replication degraded` if you make unsupported DDL or large object changes in the blue environment. For more information, see the section called “Logical replication-specific limitations for blue/green deployments”.

The following image shows an example of the **Configuration** tab:

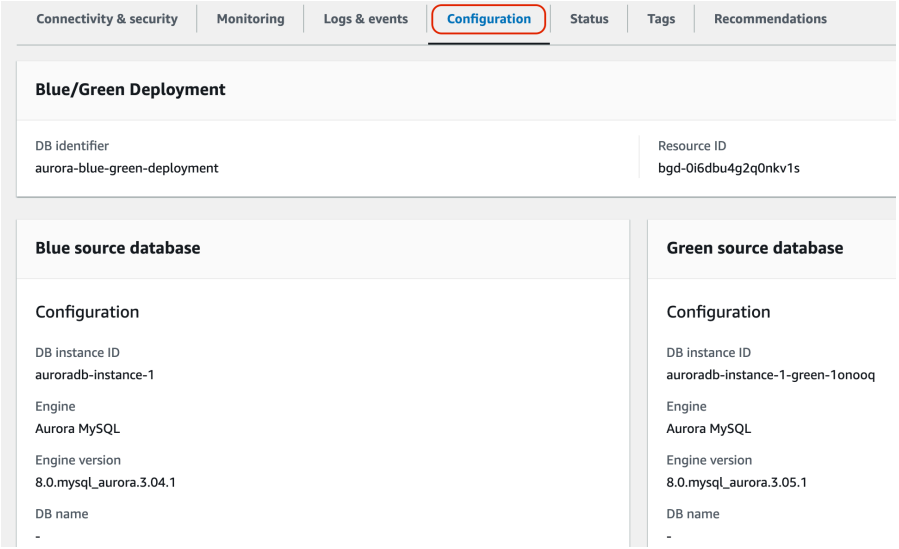

The following image shows an example of the **Status** tab:

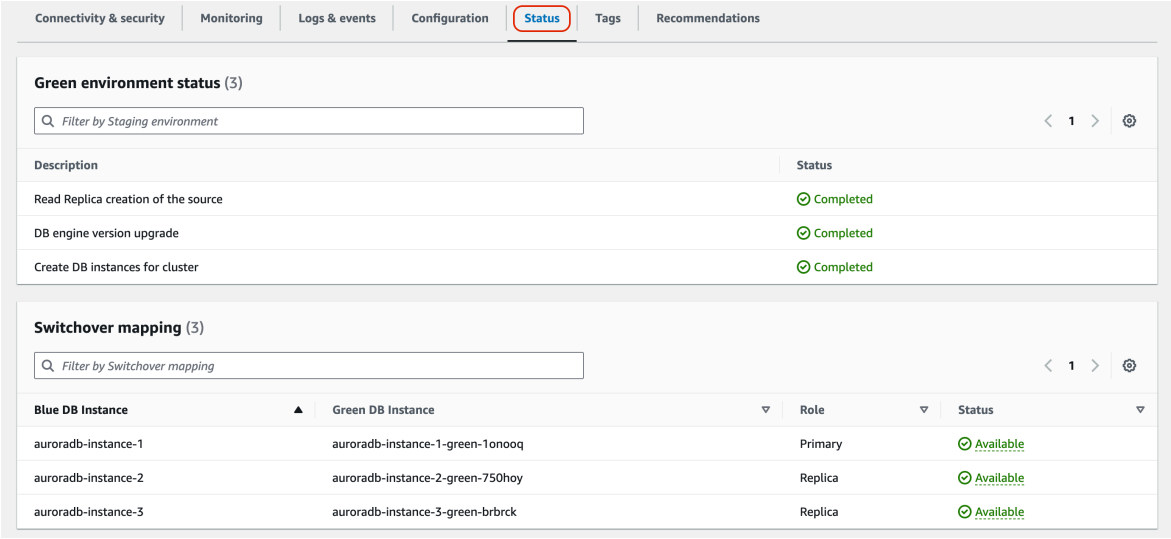

Amazon CLI

To view the details about a blue/green deployment by using the Amazon CLI, use the describe-blue-green-deployments command.

Example View the details about a blue/green deployment by filtering on its name

When you use the describe-blue-green-deployments command, you can filter on the `--blue-green-deployment-name`.

The following example shows the details for a blue/green deployment named *`my-blue-green-deployment`*.

```
aws rds describe-blue-green-deployments \
  --filters Name=blue-green-deployment-name,Values=my-blue-green-deployment
```

Example View the details about a blue/green deployment by specifying its identifier

When you use the describe-blue-green-deployments command, you can specify the `--blue-green-deployment-identifier` option.

The following example shows the details for a blue/green deployment with the identifier *bgd-1234567890abcdef*.

```
aws rds describe-blue-green-deployments \
  --blue-green-deployment-identifier bgd-1234567890abcdef
```

RDS API

To view the details about a blue/green deployment by using the Amazon RDS API, use the `DescribeBlueGreenDeployments` operation and specify the `BlueGreenDeploymentIdentifier`.

Switching a blue/green deployment in Amazon Aurora

A *switchover* transitions the DB cluster, including its DB instances, in the green environment to be the production DB cluster. Before you switch over, production traffic is routed to the cluster in the blue environment. After you switch over, production traffic is routed to the DB cluster in the green environment.

Switching over a blue/green deployment is not the same as *promoting* the green DB cluster within the blue/green deployment. If you manually promote the green DB cluster by choosing **Promote** from the **Actions** menu, replication between the blue and green environments breaks and the blue/green deployment enters a state of **Invalid configuration**.

Topics

- Switchover timeout
- Switchover guardrails
- Switchover actions

- Switchover when using Amazon RDS Proxy
- Switchover best practices
- Verifying CloudWatch metrics before switchover
- Monitoring replica lag prior to switchover
- Switching over a blue/green deployment
- After switchover

Switchover timeout

You can specify a switchover timeout period between 30 seconds and 3,600 seconds (one hour). If the switchover takes longer than the specified duration, then any changes are rolled back and no changes are made to either environment. The default timeout period is 300 seconds (five minutes).

Switchover guardrails

When you start a switchover, Amazon RDS runs some basic checks to test the readiness of the blue and green environments for switchover. These checks are known as *switchover guardrails*. These switchover guardrails prevent a switchover if the environments aren't ready for it. Therefore, they avoid longer than expected downtime and prevent the loss of data between the blue and green environments that might result if the switchover started.

Amazon RDS runs the following guardrail checks on the green environment:

- **Replication health** – Checks if green DB cluster replication status is healthy. The green DB cluster is a replica of the blue DB cluster.
- **Replication lag** – Checks if the replica lag of the green DB cluster is within allowable limits for switchover. The allowable limits are based on the specified timeout period. Replica lag indicates how far the green DB cluster is lagging behind its blue DB cluster. For more information, see the section called “Monitoring replica lag prior to switchover”.
- **Active writes** – Makes sure there are no active writes on the green DB cluster.

Amazon RDS runs the following guardrail checks on the blue environment:

- **External replication** – For Aurora PostgreSQL, makes sure that the blue environment isn't a self-managed logical source (publisher) or replica (subscriber). If it is, we recommend that

you drop the self-managed replication slots and subscriptions across all databases in the blue environment, proceed with switchover, then recreate them to resume replication. For Aurora MySQL, checks whether the blue database isn't an external binlog replica. If it is, make sure that it is not actively replicating.

- **Long-running active writes** – Makes sure there are no long-running active writes on the blue DB cluster because they can increase replica lag.
- **Long-running DDL statements** – Makes sure there are no long-running DDL statements on the blue DB cluster because they can increase replica lag.
- **Unsupported PostgreSQL changes** – For Aurora PostgreSQL, makes sure that no DDL changes and no additions or modifications of large objects have been performed on the blue environment. For more information, see the section called “Logical replication-specific limitations for blue/green deployments”.

  If Amazon RDS detects unsupported PostgreSQL changes, it changes the replication state to `Replication degraded` and notifies you that switchover is not available for the blue/green deployment. To proceed with switchover, we recommend that you delete and recreate the blue/green deployment and all green databases. To do so, choose **Actions**, **Delete with green databases**.

Switchover actions

When you switch over a blue/green deployment, RDS performs the following actions:

1. Runs guardrail checks to verify if the blue and green environments are ready for switchover.
2. Stops new write operations on the DB cluster in both environments.
3. Drops connections to the DB instances in both environments and doesn't allow new connections.
4. Waits for replication to catch up in the green environment so that the green environment is in sync with the blue environment.
5. Renames the DB cluster and DB instances in the both environments.

   RDS renames the DB cluster and DB instances in the green environment to match the corresponding DB cluster and DB instances in the blue environment. For example, assume the name of a DB instance in the blue environment is `mydb`. Also assume the name of the corresponding DB instance in the green environment is `mydb-green-abc123`. During switchover, the name of the DB instance in the green environment is changed to `mydb`.

RDS renames the DB cluster and DB instances in the blue environment by appending `-old`*n* to the current name, where *n* is a number. For example, assume the name of a DB instance in the blue environment is `mydb`. After switchover, the DB instance name might be `mydb-old1`.

RDS also renames the endpoints in the green environment to match the corresponding endpoints in the blue environment so that application changes aren't required.

6. Allows connections to databases in both environments.
7. Allows write operations on the DB cluster in the new production environment.

   After switchover, the previous production DB cluster only allows read operations. Even if you enable writes on the DB cluster, it remains read-only until you delete the blue/green deployment.

You can monitor the status of a switchover using Amazon EventBridge. For more information, see the section called “Blue/green deployment events”.

During switchover, tags from the blue environment replace all tags on resources in the green environment. Any tags that you added directly to green environment resources are overwritten during this process. For more information about tags, see Tagging Amazon Aurora andAmazon RDS resources.

If the switchover starts and then stops before finishing for any reason, then any changes are rolled back, and no changes are made to either environment.

Switchover when using Amazon RDS Proxy

In addition to the above mentioned switchover actions, if the blue cluster is a target of an Amazon RDS Proxy, the following behavior applies during switchover:

- Switchover Guardrails
  - Amazon RDS runs additional guardrail checks to validate that the proxy can successfully reach both blue and green environments and is ready for switchover.
- Application Traffic Routing During Switchover
  - During switchover, the Blue database enters read-only mode before Green environment is promoted. Amazon RDS Proxy continues routing connections to the blue database during this transitional period.

- Write operations on Aurora MySQL during this period may return read-only errors. For example, `1290 (HY000): The MySQL server is running with the --read-only option` so it cannot execute this statement. On Aurora PostgreSQL, read and write queries will return `AdminShutdown: terminating connection due to administrator command`.
- Once the switchover is detected, the proxy routes traffic to the newly promoted green environment.
- When the Green environment is promoted as the new writer, existing connections to the proxy are dropped. Applications must re-establish connections after the promotion is complete.
- You can review CloudWatch logs for Amazon RDS Proxy to see when this transitional behavior occurred.

- RDS Proxy API Behavior
  - Proxy APIs such as `describe-db-proxy-targets` reflect the updated targets only after the switchover is fully complete, even though traffic routing occurs earlier.

Switchover best practices

Before you switch over, we strongly recommend that you adhere to best practices by completing the following tasks:

- Thoroughly test the resources in the green environment. Make sure they function properly and efficiently.
- Monitor relevant Amazon CloudWatch metrics. For more information, see the section called "Verifying CloudWatch metrics before switchover".
- Identify the best time for the switchover.

  During the switchover, writes are cut off from databases in both environments. Identify a time when traffic is lowest on your production environment. Long-running transactions, such as active DDLs, can increase your switchover time, resulting in longer downtime for your production workloads.

  If there's a large number of connections on your DB cluster and DB instances, consider manually reducing them to the minimum amount necessary for your application before you switch over the blue/green deployment. One way to achieve this is to create a script that monitors the status of the blue/green deployment and starts cleaning up connections when it detects that the status has changed to `SWITCHOVER_IN_PROGRESS`.

- Make sure the DB cluster and DB instances in both environments are in `Available` state.
- Make sure the DB cluster in the green environment is healthy and replicating.
- Make sure that your network and client configurations don't increase the DNS cache Time-To-Live (TTL) beyond five seconds, which is the default for Aurora DNS zones. Otherwise, applications will continue to send write traffic to the blue environment after switchover.
- For Aurora PostgreSQL blue/green deployments, do the following:
  - Review the logical replication limitations and take any required actions prior to switchover. For more information, see the section called "Logical replication-specific limitations for blue/green deployments".
  - Run the `ANALYZE` operation to refresh the `pg_statistics` table. This reduces the risk of performance issues after switchover.
  - Before initiating a blue/green deployment switchover, verify that your application does not override the `default_transaction_read_only` parameter at the session level. During switchover, this parameter is set to on on the green environment writer to prevent writes until promotion completes. If your application or transactions override this configuration to `off`, your application may write data to the green environment during the switchover process. In the event the switchover has to roll back, these writes are not available in the blue environment, requiring you to manually resolve the data inconsistencies. We strongly recommend auditing your application queries to ensure they respect the `default_transaction_read_only` setting before proceeding with switchover.

> **Note**
>
> During a switchover, you can't modify any DB cluster included in the switchover.

Verifying CloudWatch metrics before switchover

Before you switch over a blue/green deployment, we recommend that you check the values of the following metrics within Amazon CloudWatch.

- `DatabaseConnections` – Use this metric to estimate the level of activity on the blue/green deployment, and make sure that the value is at an acceptable level for your deployment before you switch over. If Performance Insights is turned on, `DBLoad` is a more accurate metric.

- `ActiveTransactions` – If `innodb_monitor_enable` is set to `all` in the DB parameter group for any of your DB instances, use this metric to see if there's a high number of active transactions that might block switchover.

For more information, see the section called "CloudWatch metrics for Aurora".

Monitoring replica lag prior to switchover

Before you switch over a blue/green deployment, make sure that replica lag is close to zero in order to reduce downtime.

Aurora MySQL

For MySQL blue/green deployments, check the `AuroraBinlogReplicaLag` CloudWatch metric in the green environment to identify the current replica lag. For more information, see the section called "Diagnosing and resolving lag between read replicas".

Aurora PostgreSQL

For PostgreSQL blue/green deployments, check the `OldestReplicationSlotLag` CloudWatch metric in the blue environment to identify the current replica lag. For more information, see the section called "Instance-level metrics for Amazon Aurora".

In addition, you can run the following SQL query in the blue environment:

```
SELECT slot_name,
       confirmed_flush_lsn as flushed,
       pg_current_wal_lsn(),
       (pg_current_wal_lsn() - confirmed_flush_lsn) AS lsn_distance
FROM pg_catalog.pg_replication_slots
WHERE slot_type = 'logical';

slot_name        |    flushed    | pg_current_wal_lsn | lsn_distance
-----------------+---------------+--------------------+------------
logical_replica1 | 47D97/CF32980 | 47D97/CF3BAC8      | 37192
```

The `confirmed_flush_lsn` represents the last log sequence number (LSN) that was sent to the replica. The `pg_current_wal_lsn` represents where the database is now. An `lsn_distance` of 0 means that the replica is caught up.

Switching over a blue/green deployment


You can switch over a blue/green deployment using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To switch over a blue/green deployment

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the blue/green deployment that you want to switch over.
3. For **Actions**, choose **Switch over**.

   The **Switch over** page appears.

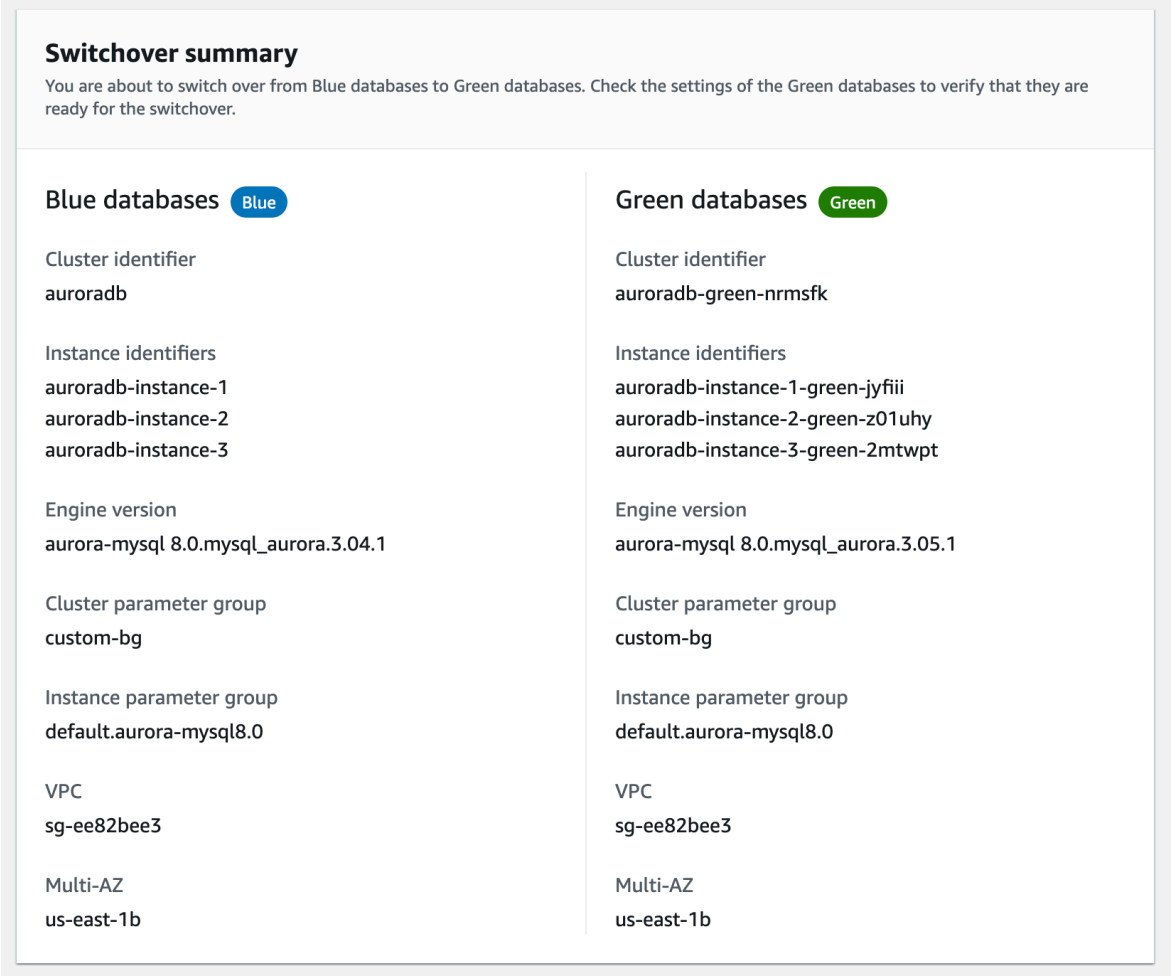

4. On the **Switch over** page, review the switchover summary. Make sure the resources in both environments match what you expect. If they don't, choose **Cancel**.
5. For **Timeout settings**, enter the time limit for switchover.
6. If your cluster is running Aurora PostgreSQL, review and acknowledge the pre-switchover recommendations. For more information, see the section called "Logical replication-specific limitations for blue/green deployments".
7. Choose **Switch over**.

Amazon CLI

To switch over a blue/green deployment by using the Amazon CLI, use the switchover-blue-green-deployment command with the following options:

- `--blue-green-deployment-identifier` – Specify the resource ID of the blue/green deployment.
- `--switchover-timeout` – Specify the time limit for the switchover, in seconds. The default is 300.

Example Switch over a blue/green deployment

For Linux, macOS, or Unix:

```
aws rds switchover-blue-green-deployment \
    --blue-green-deployment-identifier bgd-1234567890abcdef \
    --switchover-timeout 600
```

For Windows:

```
aws rds switchover-blue-green-deployment ^
    --blue-green-deployment-identifier bgd-1234567890abcdef ^
    --switchover-timeout 600
```

RDS API

To switch over a blue/green deployment by using the Amazon RDS API, use the `SwitchoverBlueGreenDeployment` operation with the following parameters:

- `BlueGreenDeploymentIdentifier` – Specify the resource ID of the blue/green deployment.


- `SwitchoverTimeout` – Specify the time limit for the switchover, in seconds. The default is 300.

After switchover

After a switchover, the DB cluster and DB instances in the previous blue environment are retained. Standard costs apply to these resources. Replication and binary logging between the blue and green environments stops.

RDS renames the DB cluster and DB instances in the blue environment by appending `-old`*n* to the current resource name, where *n* is a number. The blue DB cluster is forced into a read-only state. Even if you enable write operations, it remains read-only until you delete the blue/green deployment. RDS names the DB cluster and DB instances in the green environment `-new`*n*.

If you delete the blue/green deployment resource, RDS retains the `-old`*n* and `-new`*n* resources.

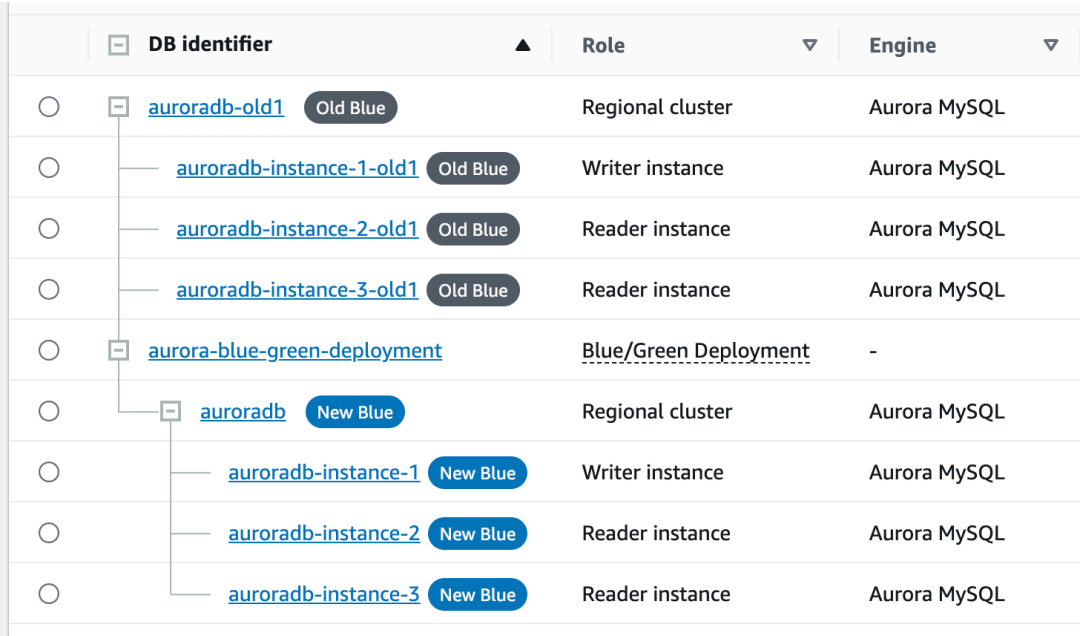

Updating the parent node for consumers

RDS offers fully managed read replicas. However, it also provides the option to set up self-managed replicas, also known as *external replicas.* External replicas allow you to use third-party resources as replication targets.

After you switch over an Aurora MySQL blue/green deployment, if the blue DB cluster had any external replicas or binary log consumers prior to switchover, you must update their parent node after switchover in order to maintain replication continuity.

To update the parent node

1. After switchover, the writer DB instance that was previously in the green environment emits an event that contains the master log file name and master log position. To locate the event, navigate to the RDS console and choose **Events** from the left navigation pane.
2. Filter by events where the source is the name of the old green writer DB instance, before switchover.
3. Locate the event that contains the binary log coordinates. The event message is similar to: `Binary log coordinates in green environment after switchover: file mysql-bin-changelog.000003 and position 40134574`.
4. Make sure that the consumer or replica has applied all binary logs from the old blue environment. Then, use the provided binary log coordinates to resume replication on the consumers. For example, if you're running a MySQL replica on EC2, you can use the following commands:

   MySQL 8.0.22 and lower major and minor versions

   ```
   CHANGE MASTER TO MASTER_HOST='{new-writer-endpoint}', MASTER_LOG_FILE='mysql-bin-changelog.000003', MASTER_LOG_POS=40134574;
   ```

   MySQL 8.0.23 and higher major and minor versions

   ```
   CHANGE REPLICATION SOURCE TO SOURCE_HOST='{new-writer-endpoint}',
    SOURCE_LOG_FILE='mysql-bin-changelog.000003', SOURCE_LOG_POS=40134574;
   ```

Deleting a blue/green deployment in Amazon Aurora

You can delete a blue/green deployment before or after you switch it over.

When you delete a blue/green deployment before switching it over, Amazon RDS optionally deletes the DB cluster in the green environment:

- If you choose to delete the DB cluster in the green environment (`--delete-target`), it must have deletion protection turned off.
- If you don't delete the DB cluster in the green environment (`--no-delete-target`), the cluster is retained, but it's no longer part of a blue/green deployment. For Aurora MySQL,

replication continues between the environments. For Aurora PostgreSQL, the green environment is promoted to a standalone environment, so replication stops.

The option to delete the green databases isn't available in the console after switchover. When you delete blue/green deployments using the Amazon CLI, you can't specify the `--delete-target` option if the deployment status is `SWITCHOVER_COMPLETED`.

> **Important**
>
> After you delete a blue/green deployment, RDS removes read-only protections from the previous production DB cluster. If the `read_only` parameter is disabled for the DB cluster, it starts to allow write operations again.


You can delete a blue/green deployment using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To delete a blue/green deployment

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the blue/green deployment that you want to delete.
3. For **Actions**, choose **Delete**.

   The **Delete blue-green deployment.** window appears.

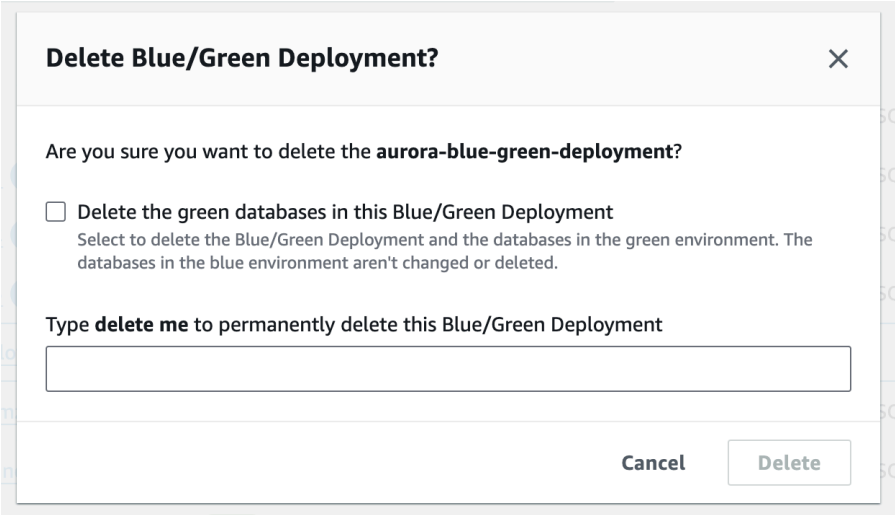

To delete the green databases, select **Delete the green databases in this blue/green deployment**.

4. Enter **`delete me`** in the box.
5. Choose **Delete**.

Amazon CLI

To delete a blue/green deployment by using the Amazon CLI, use the delete-blue-green-deployment command with the following options:

- `--blue-green-deployment-identifier` – The resource ID of the blue/green deployment to be deleted.
- `--delete-target` – Specifies that the DB cluster in the green environment is deleted. You can't specify this option if the blue/green deployment has a status of `SWITCHOVER_COMPLETED`.
- `--no-delete-target` – Specifies that the DB cluster in the green environment is retained.

Example Delete a blue/green deployment and the DB cluster in the green environment

For Linux, macOS, or Unix:

```
aws rds delete-blue-green-deployment \
    --blue-green-deployment-identifier bgd-1234567890abcdef \
    --delete-target
```

For Windows:

```
aws rds delete-blue-green-deployment ^
    --blue-green-deployment-identifier bgd-1234567890abcdef ^
    --delete-target
```

Example Delete a blue/green deployment but retain the DB cluster in the green environment

For Linux, macOS, or Unix:

```
aws rds delete-blue-green-deployment \
    --blue-green-deployment-identifier bgd-1234567890abcdef \
    --no-delete-target
```

For Windows:

```
aws rds delete-blue-green-deployment ^
    --blue-green-deployment-identifier bgd-1234567890abcdef ^
    --no-delete-target
```

RDS API

To delete a blue/green deployment by using the Amazon RDS API, use the `DeleteBlueGreenDeployment` operation with the following parameters:

- `BlueGreenDeploymentIdentifier` – The resource ID of the blue/green deployment to be deleted.
- `DeleteTarget` – Specify `TRUE` to delete the DB cluster in the green environment or `FALSE` to retain it. Cannot be `TRUE` if the blue/green deployment has a status of `SWITCHOVER_COMPLETED`.

Backing up and restoring an Amazon Aurora DB cluster

These topics provide information about backing up and restoring Amazon Aurora DB clusters.

> **Tip**
>
> The Aurora high availability features and automatic backup capabilities help to keep your data safe without requiring extensive setup from you. Before you implement a backup strategy, learn about the ways that Aurora maintains multiple copies of your data and helps you to access them across multiple DB instances and Amazon Regions. For details, see High availability for Amazon Aurora.

Topics

- Overview of backing up and restoring an Aurora DB cluster
- Retaining automated backups
- Understanding Amazon Aurora backup storage usage
- Creating a DB cluster snapshot
- Restoring from a DB cluster snapshot
- DB cluster snapshot copying
- Sharing a DB cluster snapshot
- Exporting DB cluster data to Amazon S3
- Exporting DB cluster snapshot data to Amazon S3
- Restoring a DB cluster to a specified time
- Deleting a DB cluster snapshot
- Tutorial: Restore an Amazon Aurora DB cluster from a DB cluster snapshot

Overview of backing up and restoring an Aurora DB cluster

The following topics describe Aurora backups and how to restore your Aurora DB cluster.

Contents

- Backups
  - Using Amazon Backup
- Backup window
- Restoring data
- Database cloning for Aurora
- Backtrack

Backups

Aurora backs up your cluster volume automatically and retains restore data for the length of the *backup retention period*. Aurora automated backups are continuous and incremental, so you can quickly restore to any point within the backup retention period. No performance impact or interruption of database service occurs as backup data is being written. You can specify a backup retention period from 1–35 days when you create or modify or restore a DB cluster. Aurora automated backups are stored in Amazon S3. For more information about retaining automated backups, see Retaining automated backups.

If you want to retain data beyond the backup retention period, you can take a snapshot of the data in your cluster volume. Aurora DB cluster snapshots don't expire. You can create a new DB cluster from the snapshot. For more information, see Creating a DB cluster snapshot.

During restore operations, you have the option to specify a backup retention period for your Amazon Aurora DB cluster. When you don't explicitly set this value, the restored cluster inherits the backup retention period from the source snapshot or cluster. Note that this inheritance behavior is unique to restore operations—when creating a new cluster, the system applies default retention periods instead.

Note

- For Amazon Aurora DB clusters, the default backup retention period is one day regardless of how the DB cluster is created.

- You can't disable automated backups on Aurora. The backup retention period for Aurora is managed by the DB cluster.

Your costs for backup storage depend upon the amount of Aurora backup and snapshot data you keep and how long you keep it. For information about the storage associated with Aurora backups and snapshots, see Understanding Amazon Aurora backup storage usage. For pricing information about Aurora backup storage, see Amazon RDS for Aurora pricing. After the Aurora cluster associated with a snapshot is deleted, storing that snapshot incurs the standard backup storage charges for Aurora.

Using Amazon Backup

You can use Amazon Backup to manage backups of Amazon Aurora DB clusters.

Snapshots managed by Amazon Backup are considered manual DB cluster snapshots, but don't count toward the DB cluster snapshot quota for Aurora. Snapshots that were created with Amazon Backup have names with `awsbackup:job-`*`AWS-Backup-job-number`*. For more information about Amazon Backup, see the *Amazon Backup Developer Guide*.

You can also use Amazon Backup to manage automated backups of Amazon Aurora DB clusters. If your DB cluster is associated with a backup plan in Amazon Backup, you can use that backup plan for point-in-time recovery. Automated (continuous) backups that are managed by Amazon Backup have names with `continuous:cluster-`*`AWS-Backup-job-number`*. For more information, see Restoring a DB cluster to a specified time using Amazon Backup.

Backup window

Automated backups occur daily during the preferred backup window. If the backup requires more time than allotted to the backup window, the backup continues after the window ends, until it finishes. The backup window can't overlap with the weekly maintenance window for the DB cluster.

Aurora automated backups are continuous and incremental, but the backup window is used to create a daily system backup that is preserved within the backup retention period. You can copy the backup to preserve it outside of the retention period.

> **Note**
>
> When you create a DB cluster using the Amazon Web Services Management Console, you can't specify a backup window. However, you can specify a backup window when you create a DB cluster using the Amazon CLI or RDS API.

If you don't specify a preferred backup window when you create the DB cluster, Aurora assigns a default 30-minute backup window. This window is selected at random from an 8-hour block of time for each Amazon Web Services Region. The following table lists the time blocks for each Amazon Web Services Region from which the default backup windows are assigned.

Region Name	Region	Time Block
US East (N. Virginia)	us-east-1	03:00–11:00 UTC
US East (Ohio)	us-east-2	03:00–11:00 UTC
US West (N. California)	us-west-1	06:00–14:00 UTC
US West (Oregon)	us-west-2	06:00–14:00 UTC
Africa (Cape Town)	af-south-1	03:00–11:00 UTC
Asia Pacific (Hong Kong)	ap-east-1	06:00–14:00 UTC
Asia Pacific (Hyderabad)	ap-south-2	06:30–14:30 UTC
Asia Pacific (Jakarta)	ap-southeast-3	08:00–16:00 UTC
Asia Pacific (Malaysia)	ap-southeast-5	09:00–17:00 UTC
Asia Pacific (Melbourne)	ap-southeast-4	11:00–19:00 UTC

Region Name	Region	Time Block
Asia Pacific (Mumbai)	ap-south-1	16:30–00:30 UTC
Asia Pacific (New Zealand)	ap-southeast-6	13:00–21:00 UTC
Asia Pacific (Osaka)	ap-northeast-3	00:00–08:00 UTC
Asia Pacific (Seoul)	ap-northeast-2	13:00–21:00 UTC
Asia Pacific (Singapore)	ap-southeast-1	14:00–22:00 UTC
Asia Pacific (Sydney)	ap-southeast-2	12:00–20:00 UTC
Asia Pacific (Taipei)	ap-east-2	9:00–17:00 UTC
Asia Pacific (Thailand)	ap-southeast-7	8:00–16:00 UTC
Asia Pacific (Tokyo)	ap-northeast-1	13:00–21:00 UTC
Canada (Central)	ca-central-1	03:00–11:00 UTC
Canada West (Calgary)	ca-west-1	18:00–02:00 UTC
China (Beijing)	cn-north-1	06:00–14:00 UTC
China (Ningxia)	cn-northwest-1	06:00–14:00 UTC
Europe (Frankfurt)	eu-central-1	20:00–04:00 UTC
Europe (Ireland)	eu-west-1	22:00–06:00 UTC
Europe (London)	eu-west-2	22:00–06:00 UTC
Europe (Milan)	eu-south-1	02:00–10:00 UTC
Europe (Paris)	eu-west-3	07:29–14:29 UTC

Region Name	Region	Time Block
Europe (Spain)	eu-south-2	02:00–10:00 UTC
Europe (Stockholm)	eu-north-1	23:00–07:00 UTC
Europe (Zurich)	eu-central-2	02:00–10:00 UTC
Israel (Tel Aviv)	il-central-1	03:00–11:00 UTC
Mexico (Central)	mx-central-1	19:00–03:00 UTC
Middle East (Bahrain)	me-south-1	06:00–14:00 UTC
Middle East (UAE)	me-central-1	05:00–13:00 UTC
South America (São Paulo)	sa-east-1	23:00–07:00 UTC
Amazon GovCloud (US-East)	us-gov-east-1	17:00–01:00 UTC
Amazon GovCloud (US-West)	us-gov-west-1	06:00–14:00 UTC

Restoring data

You can recover your data by creating a new Aurora DB cluster from the backup data that Aurora retains, from a DB cluster snapshot that you have saved, or from a retained automated backup. You can quickly restore a new copy of a DB cluster created from backup data to any point in time during your backup retention period. Because Aurora backups are continuous and incremental during the backup retention period, you don't need to take frequent snapshots of your data to improve restore times.

The *latest restorable time* for a DB cluster is the most recent point to which you can restore your DB cluster. This is typically within 5 minutes of the current time for an active DB cluster, or 5 minutes of the cluster deletion time for a retained automated backup.

The *earliest restorable time* specifies how far back within the backup retention period that you can restore your cluster volume.

To determine the latest or earliest restorable time for a DB cluster, look for the `Latest restorable time` or `Earliest restorable time` values on the RDS console. For information about viewing these values, see Viewing retained automated backups for Amazon Aurora.

You can determine when the restore of a DB cluster is complete by checking the `Latest restorable time` and `Earliest restorable time` values. These values return NULL until the restore operation is complete. You can't request a backup or restore operation if either `Latest restorable time` or `Earliest restorable time` returns NULL.

For information about restoring a DB cluster to a specified time, see Restoring a DB cluster to a specified time.

Database cloning for Aurora

You can also use database cloning to clone the databases of your Aurora DB cluster to a new DB cluster, instead of restoring a DB cluster snapshot. The clone databases use only minimal additional space when first created. Data is copied only as data changes, either on the source databases or on the clone databases. You can make multiple clones from the same DB cluster, or create additional clones even from other clones. For more information, see Cloning a volume for an Amazon Aurora DB cluster.

Backtrack

Aurora MySQL now supports "rewinding" a DB cluster to a specific time, without restoring data from a backup. For more information, see Backtracking an Aurora DB cluster.

Retaining automated backups

When you delete a provisioned or Aurora serverless DB cluster, you can retain automated backups. This allows you to restore a DB cluster to a specific point in time within the backup retention period, even after the cluster is deleted.

Retained automated backups contain system snapshots and transaction logs from a DB cluster. They also include DB cluster properties, such as DB instance class, which are required to restore it to an active cluster.

You can restore or remove retained automated backups using the Amazon Web Services Management Console, RDS API, and Amazon CLI.

Topics

- Retention period
- Retention costs
- Prevent automated backup deletion
- Limitations
- Viewing retained automated backups for Amazon Aurora
- Deleting retained automated backups for Amazon Aurora

Retention period

The system snapshots and transaction logs in a retained automated backup expire the same way that they expire for the source DB cluster. The settings for the retention period of the source cluster also apply to the automated backups. Because no new snapshots or logs are created for this cluster, the retained automated backups eventually expire completely. After the retention period is over, you continue to retain manual DB cluster snapshots, but all of the automated backups expire.

You can remove retained automated backups using the console, Amazon CLI or RDS API. For more information, see Deleting retained automated backups for Amazon Aurora.

Unlike a retained automated backup, a final snapshot doesn't expire. We strongly suggest that you take a final snapshot even if you retain automated backups, because the retained automated backups eventually expire.

Retention costs

There is no additional charge for backup storage of up to 100% of your total Aurora database storage for each Aurora DB cluster. There is also no additional charge up to one day when you retain automated backups after deleting a DB cluster. Backups that you retain for more than one day are charged.

There is no additional charge for transaction logs or instance metadata. All other pricing rules for backups apply to restorable clusters. For more information, see the Amazon Aurora pricing page.

Prevent automated backup deletion

Amazon RDS deletes automated backups in several situations:

- At the end of their retention period.
- When you delete a DB cluster.

If you want to keep an automated backup for a longer period, copy it to create a manual snapshot, which is retained until you delete it. Amazon RDS storage costs might apply to manual snapshots if they exceed your default storage space.

For more information about copying a DB cluster snapshot, see DB cluster snapshot copying.

Limitations

The following limitations apply to retained automated backups:

- The maximum number of retained automated backups in one Amazon Web Services Region is 40. It's not included in the quota for DB clusters. You can have up to 40 running DB clusters, 40 running DB instances, and 40 retained automated backups for DB clusters at the same time.

  For more information, see Quotas in Amazon Aurora.
- Retained automated backups don't contain information about parameters or option groups.
- You can restore a deleted cluster to a point in time that is within the retention period at the time of deletion.
- You can't modify a retained automated backup because it consists of system backups, transaction logs, and the DB cluster properties that existed at the time that you deleted the source cluster.

- Cross-Region automated backup replication isn't supported for Aurora DB clusters. Aurora doesn't support automatically replicating snapshots and transaction logs to another Amazon Web Services Region. For disaster recovery across Regions, you must manually copy Aurora snapshots to your desired destination Region.

Viewing retained automated backups for Amazon Aurora

To view your retained automated backups in the RDS console, choose **Automated backups** in the navigation pane, then choose **Retained**. To view individual snapshots associated with a retained automated backup, choose **Snapshots** in the navigation pane. Alternatively, you can describe individual snapshots associated with a retained automated backup. From there, you can restore a DB instance directly from one of those snapshots.

To describe your retained automated backups using the Amazon CLI, use the following command:

```
aws rds describe-db-cluster-automated-backups --db-cluster-resource-
id DB_cluster_resource_ID
```

To describe your retained automated backups using the RDS API, call the `DescribeDBClusterAutomatedBackups` action with the `DbClusterResourceId` parameter.

Deleting retained automated backups for Amazon Aurora

You can delete retained automated backups when they are no longer needed. To delete a retained automated backup using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API, use the following procedures.

Console

To delete a retained automated backup

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Automated backups**.
3. Choose the **Retained** tab.



4. Choose the retained automated backup that you want to delete.
5. For **Actions**, choose **Delete**.
6. On the confirmation page, enter **`delete me`** and choose **Delete**.

Amazon CLI

You can delete a retained automated backup by using the Amazon CLI command [delete-db-cluster-automated-backup](#) with the following option:

- `--db-cluster-resource-id` – The resource identifier for the source DB cluster.

  You can find the resource identifier for the source DB cluster of a retained automated backup by running the Amazon CLI command [describe-db-cluster-automated-backups](#).

Example

This example deletes the retained automated backup for the source DB cluster that has the resource ID `cluster-123ABCEXAMPLE`.

For Linux, macOS, or Unix:

```
aws rds delete-db-cluster-automated-backup \
    --db-cluster-resource-id cluster-123ABCEXAMPLE
```

For Windows:

```
aws rds delete-db-cluster-automated-backup ^
    --db-cluster-resource-id cluster-123ABCEXAMPLE
```

RDS API

You can delete a retained automated backup by using the Amazon RDS API operation [DeleteDBClusterAutomatedBackup](#) with the following parameter:

- `DbClusterResourceId` – The resource identifier for the source DB cluster.

  You can find the resource identifier for the source DB instance of a retained automated backup using the Amazon RDS API operation DescribeDBClusterAutomatedBackups.

Understanding Amazon Aurora backup storage usage

Amazon Aurora maintains two types of backup: automated (continuous) backups and snapshots.

Automated backup storage

The automated (continuous) backup for a cluster incrementally stores all database changes within a specified retention period to be able to restore to any point in time within that retention period. Retention periods can range from 1–35 days. Automated backups are incremental and charged based on the amount of storage that's required to restore to any time within the retention period.

Aurora also provides a free amount of backup usage. This free amount of usage is equal to the latest cluster volume size (as represented by the `VolumeBytesUsed` Amazon CloudWatch metric). This amount is subtracted from the calculated automated backup usage. There is also no charge for an automated backup whose retention period is just 1 day.

For example, your automated backup has a retention period of 7 days, and you want to restore your cluster to its state from four days ago. Aurora uses the incremental data stored in the automated backup to re-create the state of the cluster at that exact time four days ago.

The automated backup stores all the required information to be able to restore the cluster at any point in time in the retention window. That means that it stores all changes during the retention window, including writes of new information or deletion of existing information. For databases where many changes occur, the size of the automated backup grows over time. After a database stops experiencing changes, you can expect the size of the automated backup to decrease, as the previously stored changes exit the retention window.

The total billed usage for the automated backup never exceeds the cumulative cluster volume size over the retention period. For example, if your retention period is 7 days, and your cluster volume was 100 GB every day, then the billed automated backup usage never exceeds 700 GB (100 GB * 7).

Snapshot storage

DB cluster snapshots are always full backups that capture the size of the cluster volume when you create them. Whether you take snapshots manually or through an Amazon Backups plan, Aurora treats them as manual snapshots. Aurora provides unlimited free storage for snapshots within the automated backup retention period. After a manual snapshot is outside this period, it incurs charges per GB-month. Automated system snapshots remain free unless you copy them. Because automated backups don't cover snapshot copies, Amazon always bills for them.

For general information about Aurora backups, see Backups. For information about pricing for Aurora backup storage, see the Amazon Aurora pricing page.

Amazon CloudWatch metrics for Aurora backup storage

You can monitor your Aurora clusters and create reports using Amazon CloudWatch metrics through the CloudWatch console. You can use the following CloudWatch metrics to review and monitor the amount of storage used by your Aurora backups. These metrics are computed independently for each Aurora DB cluster.

- `BackupRetentionPeriodStorageUsed` – Represents the amount of backup storage used, in bytes, for storing automated backups at the current time.
  - The value depends on the size of the cluster volume and the number of changes (writes and updates) that are made to the DB cluster during the retention period. This is because the automated backup must store all incremental changes made to the cluster to be able to restore to any point in time.
  - This metric doesn't subtract the free tier of backup usage that Aurora provides.
  - This metric emits a single daily data point for the automated backup usage recorded on that day.
- `SnapshotStorageUsed` – Represents the amount of backup storage used, in bytes, for storing manual snapshots beyond the automated backup's retention period.
  - The value depends on the number of snapshots you keep beyond the automated backup's retention period and the size of each snapshot.
  - The size of each snapshot is the size of the cluster volume at the time you take the snapshot.
  - Snapshots are full backups, not incremental.
  - This metric emits one daily data point for each snapshot being charged. To retrieve your daily total snapshot usage, take the sum of this metric over a period of 1 day.
- `TotalBackupStorageBilled` – Represents the metrics for all billed backup usage, in bytes, for the given cluster:

  ```
  BackupRetentionPeriodStorageUsed + SnapshotStorageUsed - free tier
  ```

  - This metric emits one daily data point for the `BackupRetentionPeriodStorageUsed` value *minus* the free tier of backup usage that Aurora provides. This free tier is equal to the latest recorded size of the DB cluster volume. This data point represents the actual billed usage for the automated backup.

- This metric emits individual daily data points for all of the `SnapshotStorageUsed` values.
- To retrieve your total daily billed backup usage, take the sum of this metric over a period of 1 day. This sums all of the billed snapshot usage with the billed automated backup usage, to give your total billed backup usage.

For more information about how to use CloudWatch metrics, see Availability of Aurora metrics in the Amazon RDS console.

Calculating backup storage usage

The usage for an automated backup is calculated by looking at all of the incremental records that must be stored, to be able to restore to any point in time within the retention period of the backup. These changes include not just the number of write operations, but also the size and scope of data modifications. Each type of operation (INSERT, UPDATE, DELETE) creates change records that must be retained for point-in-time recovery. Therefore, while two databases might have the same number of write operations (IOPS), their backup storage requirements could differ significantly based on the volume of data being modified in each transaction.

For example, you have an automated backup with retention period of 7 days. Your cluster volume size just before the retention period was 100 GB, so that's the least amount that Aurora needs to store. Then you have the following activity for the next 7 days, where the incremental record size is the amount of storage needed to store the change records coming from your database's writes and updates.

Day	Incremental record size (GB)
1	10
2	15
3	25
4	20
5	10
6	25

Day	Incremental record size (GB)
7	30
Total	135

This data means that the calculated automated backup usage for your backup is the following:

```
100 GB (volume size before retention period) + 135 GB (size of incremental records) =
 235 GB total backup usage
```

The billed usage then subtracts the free tier of usage. Assume that the latest size of your volume is 200 GB:

```
235 GB total backup usage - 200 GB (latest volume size) = 35 GB billed backup usage
```

FAQs

When am I billed for snapshots?

You're billed for manual snapshots that are outside (older than) the retention period of the automated backup.

What's a manual snapshot?

A manual snapshot is a snapshot to which one of the following conditions applies:

- Manually requested by you
- Taken by an automated backup service such as Amazon Backup
- Copied from an automated system snapshot to preserve it outside the retention period

What happens to my manual snapshots if I delete my DB cluster?

Manual snapshots don't expire until you delete them.

When you delete your DB cluster, the manual snapshots that you previously took continue to exist. If these snapshots previously weren't being billed because they were within the automated backup retention period, now they're not covered anymore and all start to be billed at their full size for their usage.

How can I reduce my backup storage costs?

There are a few ways to reduce backup usage related costs:

- Delete manual snapshots that lie outside your automated backup's retention period. This includes the snapshots you've taken, as well as the snapshots that your Amazon Backup plan might have taken. Make sure to check your Amazon Backup plan to make sure it isn't keeping snapshots outside the retention period that you don't expect.
- Evaluate your writes and updates to your database to see if you can reduce the number of changes you're making. Because our automated backup stores all incremental changes within the retention period, reducing the number of updates that you're making also reduces your automated backup charges.
- Evaluate whether reducing your automated backup's retention period would make sense. Reducing the retention period means that the backup stores fewer days of incremental data, which could reduce the overall backup cost. However, reducing this retention period could also cause some snapshots to start being billed because they're now outside the retention period. Make sure to check all the extra snapshot costs that you might incur before deciding whether this is the right course of action for you.

How is backup storage billed?

Backup storage is billed by the GB-month.

This means that the backup storage usage is charged as the weighted average of the usage over the given month. Here are a few examples for a 30-day month:

- Billed backup usage is 100 GB for all 30 days of the month. Your charge is the following:

```
(100 GB * 30) / 30 = 100 GB-month
```

- Billed backup usage is 100 GB for the first 15 days of the month, then 0 GB for the last 15. Your charge is the following:

```
(100 GB * 15 + 0 GB * 15) / 30 = 50 GB-month
```

- Billed backup usage is 50 GB for the first 10 days of the month, 100 GB for the next 10 days, then 150 GB for the final 10. Your charge is the following:

```
(50 GB * 10 + 100 GB * 10 + 150 GB * 10) / 30 = 100 GB-month
```

How does the backtrack setting for my DB cluster affect backup storage usage?

The backtrack setting for an Aurora DB cluster doesn't affect the volume of backup data for that cluster. Amazon bills the storage for backtracking data separately. For pricing information about Aurora backtracking, see the Amazon Aurora pricing page.

How do storage costs apply to shared snapshots?

If you share a snapshot with another user, you're still the owner of that snapshot. The storage costs apply to the snapshot owner. If you delete a shared snapshot that you own, nobody can access it.

To keep access to a shared snapshot owned by someone else, you can copy that snapshot. Doing so makes you the owner of the new snapshot. Any storage costs for the copied snapshot apply to your account.

For more information on sharing snapshots, see Sharing a DB cluster snapshot. For more information on copying snapshots, see DB cluster snapshot copying.

Creating a DB cluster snapshot

Amazon RDS creates a storage volume snapshot of your DB cluster, backing up the entire DB cluster and not just individual databases. When you create a DB cluster snapshot, you need to identify which DB cluster you are going to back up, and then give your DB cluster snapshot a name so you can restore from it later. The amount of time it takes to create a DB cluster snapshot varies with the size of your databases. Because the snapshot includes the entire storage volume, the size of files, such as temporary files, also affects the amount of time it takes to create the snapshot.

> **Note**
>
> Your DB cluster must be in the `available` state to take a DB cluster snapshot.

Unlike automated backups, manual snapshots aren't subject to the backup retention period. Snapshots don't expire.

For very long-term backups, we recommend exporting snapshot data to Amazon S3. If the major version of your DB engine is no longer supported, you can't restore to that version from a snapshot. For more information, see Exporting DB cluster snapshot data to Amazon S3.

You can create a DB cluster snapshot using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To create a DB cluster snapshot

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Snapshots**.

   The **Manual snapshots** list appears.
3. Choose **Take snapshot**.

   The **Take DB snapshot** window appears.
4. For **Snapshot type**, select **DB cluster**.
   Take DB snapshot.

5. Choose the **DB cluster** for which you want to take a snapshot.
6. Enter the **Snapshot name**.
7. Choose **Take snapshot**.

   The **Manual snapshots** list appears, with the new DB cluster snapshot's status shown as `Creating`. After its status is `Available`, you can see its creation time.

Amazon CLI

When you create a DB cluster snapshot using the Amazon CLI, you need to identify which DB cluster you are going to back up, and then give your DB cluster snapshot a name so you can restore from it later. You can do this by using the Amazon CLI `create-db-cluster-snapshot` command with the following parameters:

- `--db-cluster-identifier`
- `--db-cluster-snapshot-identifier`

In this example, you create a DB cluster snapshot named *`mydbclustersnapshot`* for a DB cluster called *`mydbcluster`*.

Example

For Linux, macOS, or Unix:

```
aws rds create-db-cluster-snapshot \
    --db-cluster-identifier mydbcluster \
    --db-cluster-snapshot-identifier mydbclustersnapshot
```

For Windows:

```
aws rds create-db-cluster-snapshot ^
    --db-cluster-identifier mydbcluster ^
    --db-cluster-snapshot-identifier mydbclustersnapshot
```

RDS API

When you create a DB cluster snapshot using the Amazon RDS API, you need to identify which DB cluster you are going to back up, and then give your DB cluster snapshot a name so you can

restore from it later. You can do this by using the Amazon RDS API `CreateDBClusterSnapshot` command with the following parameters:

- DBClusterIdentifier
- DBClusterSnapshotIdentifier

Determining whether the DB cluster snapshot is available

You can check that the DB cluster snapshot is available by looking under **Snapshots** on the **Maintenance & backups** tab on the detail page for the cluster in the Amazon Web Services Management Console, by using the `describe-db-cluster-snapshots` CLI command, or by using the `DescribeDBClusterSnapshots` API action.

You can also use the `wait db-cluster-snapshot-available` CLI command to poll the API every 30 seconds until the snapshot is available.

Restoring from a DB cluster snapshot

Amazon RDS creates a storage volume snapshot of your DB cluster, backing up the entire DB cluster and not just individual databases. You can create a new DB cluster by restoring from a DB snapshot. You provide the name of the DB cluster snapshot to restore from, and then provide a name for the new DB cluster that is created from the restore. You can't restore from a DB cluster snapshot to an existing DB cluster; a new DB cluster is created when you restore.

Important

You can't restore a snapshot to a DB engine version that has passed its Aurora end of standard support date. You can only access a database after it successfully upgrades to a supported version. For more information on supported Aurora DB engine versions, see Amazon RDS Extended Support with Amazon Aurora.

If an upgrade to a supported version for your cluster fails, the cluster status changes to `upgrade-failed` and Aurora creates a final snapshot with the prefix `rds-final`. For access to your restored database on the deprecated version after an upgrade failure, contact Amazon Support.

You can use the restored DB cluster as soon as its status is `available`.

You can use Amazon CloudFormation to restore a DB cluster from a DB cluster snapshot. For more information, see AWS::RDS::DBCluster in the *Amazon CloudFormation User Guide*.

Note

Sharing a manual DB cluster snapshot, whether encrypted or unencrypted, enables authorized Amazon accounts to directly restore a DB cluster from the snapshot instead of taking a copy of it and restoring from that. For more information, see Sharing a DB cluster snapshot.

For information about restoring an Aurora DB cluster or a global cluster with an RDS Extended Support version, see Restoring an Aurora DB cluster or a global cluster with Amazon RDS Extended Support.

Parameter group considerations

We recommend that you retain the DB parameter group and DB cluster parameter group for any DB cluster snapshots you create, so that you can associate your restored DB cluster with the correct parameter groups.

The default DB parameter group and DB cluster parameter group are associated with the restored cluster, unless you choose different ones. No custom parameter settings are available in the default parameter groups.

You can specify the parameter groups when you restore the DB cluster.

For more information about DB parameter groups and DB cluster parameter groups, see Parameter groups for Amazon Aurora.

Security group considerations

When you restore a DB cluster, the default virtual private cloud (VPC), DB subnet group, and VPC security group are associated with the restored instance, unless you choose different ones.

- If you're using the Amazon RDS console, you can specify a custom VPC security group to associate with the cluster or create a new VPC security group.
- If you're using the Amazon CLI, you can specify a custom VPC security group to associate with the cluster by including the `--vpc-security-group-ids` option in the `restore-db-cluster-from-snapshot` command.
- If you're using the Amazon RDS API, you can include the `VpcSecurityGroupIds.VpcSecurityGroupId.N` parameter in the `RestoreDBClusterFromSnapshot` action.

As soon as the restore is complete and your new DB cluster is available, you can also change the VPC settings by modifying the DB cluster. For more information, see Modifying an Amazon Aurora DB cluster.

Amazon Aurora considerations

With Aurora, you restore a DB cluster snapshot to a DB cluster.

With both Aurora MySQL and Aurora PostgreSQL, you can also restore a DB cluster snapshot to an Aurora Serverless DB cluster.

With Aurora MySQL, you can restore a DB cluster snapshot from a cluster without parallel query to a cluster with parallel query. Because parallel query is typically used with very large tables, the snapshot mechanism is the fastest way to ingest large volumes of data to an Aurora MySQL parallel query-enabled cluster. For more information, see Parallel query for Amazon Aurora MySQL.

Restoring from a snapshot

You can restore a DB cluster from a DB cluster snapshot using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To restore a DB cluster from a DB cluster snapshot

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Snapshots**.
3. Choose the DB cluster snapshot that you want to restore from.
4. For **Actions**, choose **Restore snapshot**.

   The **Restore snapshot** page displays.
5. Choose the DB engine version to which you want to restore the DB cluster.

   By default, the snapshot is restored to the same DB engine version as the source DB cluster, if that version is available.
6. For **DB instance identifier**, enter the name for your restored DB instance. Note that Amazon RDS derives the DB cluster identifier from the DB instance identifier you specify.
7. Specify other settings, such as the DB cluster storage configuration.

   For information about each setting, see Settings for Aurora DB clusters.
8. Choose **Restore DB cluster**.

Amazon CLI

To restore a DB cluster from a DB cluster snapshot, use the Amazon CLI command restore-db-cluster-from-snapshot.

In this example, you restore from a previously created DB cluster snapshot named `mydbclustersnapshot`. You restore to a new DB cluster named `mynewdbcluster`.

You can specify other settings, such as the DB engine version. If you don't specify an engine version, the DB cluster is restored to the default engine version.

For information about each setting, see Settings for Aurora DB clusters.

Example

For Linux, macOS, or Unix:

```
aws rds restore-db-cluster-from-snapshot \
    --db-cluster-identifier mynewdbcluster \
    --snapshot-identifier mydbclustersnapshot \
    --engine aurora-mysql|aurora-postgresql
```

For Windows:

```
aws rds restore-db-cluster-from-snapshot ^
    --db-cluster-identifier mynewdbcluster ^
    --snapshot-identifier mydbclustersnapshot ^
    --engine aurora-mysql|aurora-postgresql
```

After the DB cluster has been restored, you must add the DB cluster to the security group used by the DB cluster used to create the DB cluster snapshot if you want the same functionality as that of the previous DB cluster.

Important

If you use the console to restore a DB cluster, then Amazon RDS automatically creates the primary DB instance (writer) for your DB cluster. If you use the Amazon CLI to restore a DB cluster, you must explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster. If you don't create the primary DB instance, the DB cluster endpoints remain in the `creating` status.
Call the create-db-instance Amazon CLI command to create the primary instance for your DB cluster. Include the name of the DB cluster as the `--db-cluster-identifier` option value.

RDS API

To restore a DB cluster from a DB cluster snapshot, call the RDS API operation RestoreDBClusterFromSnapshot with the following parameters:

- `DBClusterIdentifier`
- `SnapshotIdentifier`

> **Important**
>
> If you use the console to restore a DB cluster, then Amazon RDS automatically creates the primary DB instance (writer) for your DB cluster. If you use the RDS API to restore a DB cluster, you must explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster. If you don't create the primary DB instance, the DB cluster endpoints remain in the `creating` status.
> Call the RDS API operation CreateDBInstance to create the primary instance for your DB cluster. Include the name of the DB cluster as the `DBClusterIdentifier` parameter value.

DB cluster snapshot copying

With Amazon Aurora, you can copy automated backups or manual DB cluster snapshots. After you copy a snapshot, the copy is a manual snapshot. You can make multiple copies of an automated backup or manual snapshot, but each copy must have a unique identifier.

You can copy a snapshot within the same Amazon Web Services Region, you can copy a snapshot across Amazon Web Services Regions, and you can copy shared snapshots. You can copy snapshots to another Amazon Web Services Region or account in a single step.

> **Note**
>
> Amazon bills you based upon the amount of Amazon Aurora backup and snapshot data you keep and the period of time that you keep it. For information about the storage associated with Aurora backups and snapshots, see Understanding Amazon Aurora backup storage usage. For pricing information about Aurora storage, see Amazon RDS for Aurora pricing.

Review the limitations and considerations for DB cluster snapshot copying. To copy DB cluster snapshots, see one of the following topics.

- Copying a DB cluster snapshot with the Amazon Web Services Management Console
- Copying an unencrypted DB cluster snapshot by using the Amazon CLI or Amazon RDS API
- Copying an encrypted DB cluster snapshot by using the Amazon CLI or Amazon RDS API
- Copying a DB cluster snapshot across accounts

Copying a DB cluster snapshot with the Amazon Web Services Management Console

Use the procedures in this topic to copy a DB cluster snapshot. If your source database engine is Aurora, then your snapshot is a DB cluster snapshot.

For each Amazon account, you can copy up to five DB cluster snapshots at a time from one Amazon Web Services Region to another. Copying both encrypted and unencrypted DB cluster snapshots is supported. If you copy a DB cluster snapshot to another Amazon Web Services Region, you create a manual DB cluster snapshot that is retained in that Amazon Web Services Region. Copying a DB

cluster snapshot out of the source Amazon Web Services Region incurs Amazon RDS data transfer charges.

After the DB cluster snapshot copy has been created in the new Amazon Web Services Region, the DB cluster snapshot copy behaves the same as all other DB cluster snapshots in that Amazon Web Services Region.


This procedure works for copying encrypted or unencrypted DB cluster snapshots, in the same Amazon Web Services Region or across Regions.

To cancel a copy operation once it is in progress, delete the target DB cluster snapshot while that DB cluster snapshot is in **copying** status.

Before copying a DB cluster snapshot, review the Limitations and Considerations for snapshot copying.

To copy a DB cluster snapshot

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Snapshots**.
3. Select the DB cluster snapshot you want to copy.
4. Choose **Actions**, and then choose **Copy snapshot**.

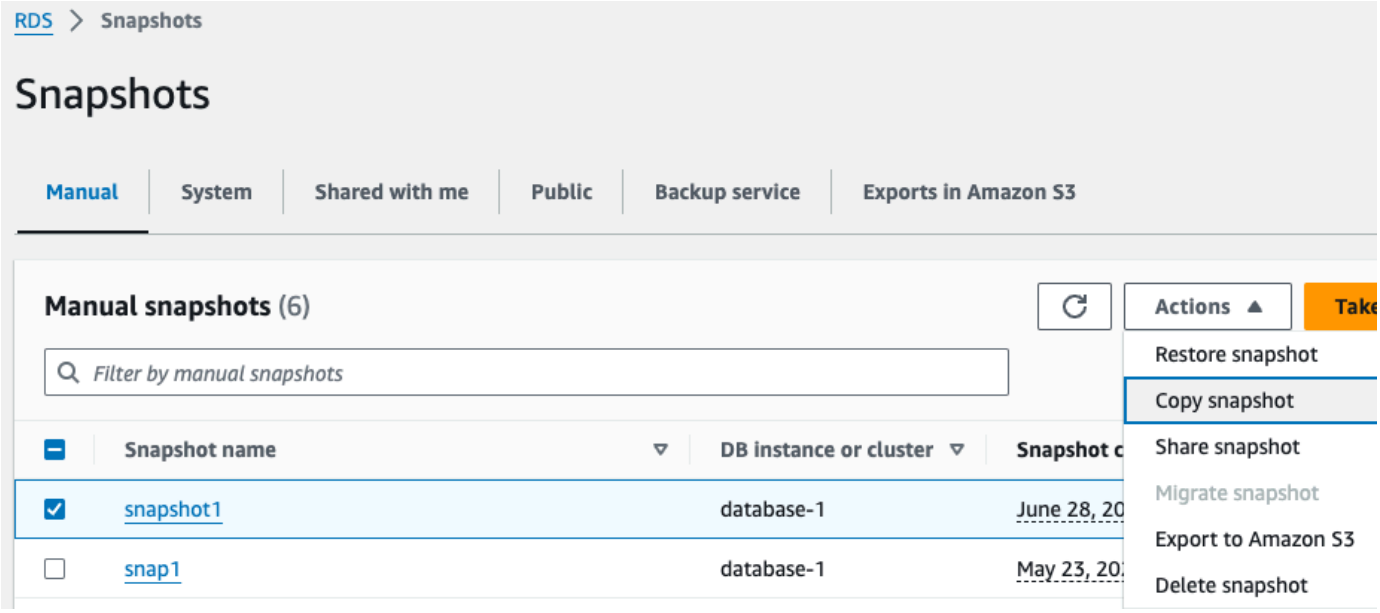

5. (Optional) To copy the DB cluster snapshot to a different Amazon Web Services Region, choose that Amazon Web Services Region for **Destination Region**.

6. Enter the name of the DB cluster snapshot copy in **New DB Snapshot Identifier**.
7. To copy tags and values from the snapshot to the copy of the snapshot, choose **Copy Tags**.
8. Choose **Copy Snapshot**.

Limitations

The following are some limitations when you copy snapshots:

- You can't copy a snapshot to or from the following Amazon Web Services Regions:
  - China (Beijing)
  - China (Ningxia)
- You can copy a snapshot between Amazon GovCloud (US-East) and Amazon GovCloud (US-West). However, you can't copy a snapshot between these Amazon GovCloud (US) Regions and commercial Amazon Web Services Regions.
- If you delete a source snapshot before the target snapshot becomes available, the snapshot copy might fail. Verify that the target snapshot has a status of `AVAILABLE` before you delete a source snapshot.
- You can have up to 5 cross-Region snapshot copy requests in progress to a single destination Region per account.
- When you request multiple snapshot copies for the same source DB instance, they're queued internally. The copies requested later won't start until the previous snapshot copies are completed. For more information, see Why is my EC2 AMI or EBS snapshot creation slow? in the Amazon Knowledge Center.
- Depending on the Amazon Web Services Regions involved and the amount of data to be copied, a cross-Region snapshot copy can take hours to complete. In some cases, there might be a large number of cross-Region snapshot copy requests from a given source Region. In such cases, Amazon RDS might put new cross-Region copy requests from that source Region into a queue until some in-progress copies complete. No progress information is displayed about copy requests while they are in the queue. Progress information is displayed when the copy starts.
- Aurora doesn't support incremental snapshots. Aurora DB cluster snapshot copies are always stored as full copies. A full snapshot copy contains all of the data and metadata required to restore the DB cluster.

Considerations for snapshot copying

The following are considerations when copying snapshots.

Topics

- Considerations for shared snapshot copying
- Considerations for encrypted DB cluster snapshot copying
- Considerations for Cross-Region snapshot copying
- Considerations for parameter groups

Considerations for shared snapshot copying

You can copy snapshots shared to you by other Amazon accounts. In some cases, you might copy an encrypted snapshot that has been shared from another Amazon account. In these cases, you must have access to the Amazon KMS key that was used to encrypt the snapshot. For more information, see Sharing encrypted snapshots.

Cross-Region and cross-account copy in a single step

To copy a snapshot cross-Region and cross-account in a single action, you must first share the snapshot with the target Amazon account. If the snapshot is encrypted, you must also share the Amazon KMS key with the target Amazon account. If the snapshot is encrypted with the default Amazon KMS key, you must first copy the snapshot to re-encrypt it with a customer managed key before sharing it with the target account. Once shared, you can initiate a copy to that account (in-Region or cross-Region) from the target account.

Considerations for encrypted DB cluster snapshot copying

You can copy a snapshot that has been encrypted using a KMS key. If you copy an encrypted snapshot, the copy of the snapshot must also be encrypted. If you copy an encrypted snapshot within the same Amazon Web Services Region, you can encrypt the copy with the same KMS key as the original snapshot. Or you can specify a different KMS key.

If you copy an encrypted snapshot across Regions, you must specify a KMS key valid in the destination Amazon Web Services Region. It can be a Region-specific KMS key, or a multi-Region key. For more information on multi-Region KMS keys, see Using multi-Region keys in Amazon KMS.

For more information about Amazon KMS key management for Amazon RDS, see Amazon KMS key management.

The source snapshot remains encrypted throughout the copy process. For more information, see Limitations of Amazon Aurora encrypted DB clusters.

> **Note**
>
> For Amazon Aurora DB cluster snapshots, you can't encrypt an unencrypted DB cluster snapshot when you copy the snapshot.

To copy encrypted DB cluster snapshots, see the following topics.

- Copying an encrypted DB cluster snapshot by using the Amazon CLI or Amazon RDS API
- Copying a DB cluster snapshot across accounts

Considerations for Cross-Region snapshot copying

You can copy DB cluster snapshots across Amazon Web Services Regions. However, there are certain constraints and considerations for cross-Region snapshot copying.

Depending on the Amazon Web Services Regions involved and the amount of data to be copied, a cross-Region snapshot copy can take hours to complete.

In some cases, there might be a large number of cross-Region snapshot copy requests from a given source Amazon Web Services Region. In such cases, Amazon RDS might put new cross-Region copy requests from that source Amazon Web Services Region into a queue until some in-progress copies complete. No progress information is displayed about copy requests while they are in the queue. Progress information is displayed when the copying starts.

Data transfer charges applies for cross-Region snapshot copy. Cross-Region snapshot copying creates full copies in the target Region, but the data transfer charges are incremental. Incremental data includes both the new data that has been added to a customer's database since the last copy, as well as any changes made to existing data. For more information, see Creating backup copies across Amazon Web Services Regions in the *Amazon Backup Developer Guide*.

> **Note**
>
> Aurora copies the minimum amount of data required to create a full copy of a snapshot in the destination region. Data transfer charges apply when copying snapshots between regions.

Considerations for parameter groups

When you copy a snapshot across Regions, the copy doesn't include the parameter group used by the original DB cluster. When you restore a snapshot to create a new DB cluster, that DB cluster gets the default parameter group for the Amazon Web Services Region it is created in. To give the new DB cluster the same parameters as the original, do the following:

1. In the destination Amazon Web Services Region, create a DB cluster parameter group with the same settings as the original DB cluster. If one already exists in the new Amazon Web Services Region, you can use that one.
2. After you restore the snapshot in the destination Amazon Web Services Region, modify the new DB cluster and add the new or existing parameter group from the previous step.

Copying an unencrypted DB cluster snapshot by using the Amazon CLI or Amazon RDS API

Use the procedures in the following sections to copy an unencrypted DB cluster snapshot by using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API.

To cancel a copy operation once it is in progress, delete the target DB cluster snapshot identified by `--target-db-cluster-snapshot-identifier` or `TargetDBClusterSnapshotIdentifier` while that DB cluster snapshot is in **copying** status.

Console

To copy a DB cluster snapshot using the Amazon Web Services Management Console, see Copying a DB cluster snapshot with the Amazon Web Services Management Console.

Amazon CLI

To copy a DB cluster snapshot, use the Amazon CLI copy-db-cluster-snapshot command. If you are copying the snapshot to another Amazon Web Services Region, run the command in the Amazon Web Services Region to which the snapshot will be copied.

The following options are used to copy an unencrypted DB cluster snapshot:

- `--source-db-cluster-snapshot-identifier` – The identifier for the DB cluster snapshot to be copied. If you are copying the snapshot to another Amazon Web Services Region, this identifier must be in the ARN format for the source Amazon Web Services Region.
- `--target-db-cluster-snapshot-identifier` – The identifier for the new copy of the DB cluster snapshot.

The following code creates a copy of DB cluster snapshot `arn:aws-cn:rds:us-east-1:123456789012:cluster-snapshot:aurora-cluster1-snapshot-20130805` named `myclustersnapshotcopy` in the Amazon Web Services Region in which the command is run. When the copy is made, all tags on the original snapshot are copied to the snapshot copy.

Example

For Linux, macOS, or Unix:

```
aws rds copy-db-cluster-snapshot \
  --source-db-cluster-snapshot-identifier arn:aws-cn:rds:us-
east-1:123456789012:cluster-snapshot:aurora-cluster1-snapshot-20130805 \
  --target-db-cluster-snapshot-identifier myclustersnapshotcopy \
  --copy-tags
```

For Windows:

```
aws rds copy-db-cluster-snapshot ^
  --source-db-cluster-snapshot-identifier arn:aws-cn:rds:us-
east-1:123456789012:cluster-snapshot:aurora-cluster1-snapshot-20130805 ^
  --target-db-cluster-snapshot-identifier myclustersnapshotcopy ^
  --copy-tags
```

RDS API

To copy a DB cluster snapshot, use the Amazon RDS API CopyDBClusterSnapshot operation. If you are copying the snapshot to another Amazon Web Services Region, perform the action in the Amazon Web Services Region to which the snapshot will be copied.

The following parameters are used to copy an unencrypted DB cluster snapshot:

- `SourceDBClusterSnapshotIdentifier` – The identifier for the DB cluster snapshot to be copied. If you are copying the snapshot to another Amazon Web Services Region, this identifier must be in the ARN format for the source Amazon Web Services Region.
- `TargetDBClusterSnapshotIdentifier` – The identifier for the new copy of the DB cluster snapshot.

The following code creates a copy of a snapshot `arn:aws-cn:rds:us-east-1:123456789012:cluster-snapshot:aurora-cluster1-snapshot-20130805` named `myclustersnapshotcopy` in the US West (N. California) Region. When the copy is made, all tags on the original snapshot are copied to the snapshot copy.

Example

```
https://rds.us-west-1.amazonaws.com/
   ?Action=CopyDBClusterSnapshot
   &CopyTags=true
   &SignatureMethod=HmacSHA256
   &SignatureVersion=4
   &SourceDBSnapshotIdentifier=arn%3Aaws%3Ards%3Aus-east-1%3A123456789012%3Acluster-snapshot%3Aaurora-cluster1-snapshot-20130805
   &TargetDBSnapshotIdentifier=myclustersnapshotcopy
   &Version=2013-09-09
   &X-Amz-Algorithm=AWS4-HMAC-SHA256
   &X-Amz-Credential=AKIADQKE4SARGYLE/20140429/us-west-1/rds/aws4_request
   &X-Amz-Date=20140429T175351Z
   &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
   &X-Amz-Signature=9164337efa99caf850e874a1cb7ef62f3cea29d0b448b9e0e7c53b288ddffed2
```

Copying an encrypted DB cluster snapshot by using the Amazon CLI or Amazon RDS API

Use the procedures in the following sections to copy an encrypted DB cluster snapshot by using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API.

To cancel a copy operation once it is in progress, delete the target DB cluster snapshot identified by `--target-db-cluster-snapshot-identifier` or `TargetDBClusterSnapshotIdentifier` while that DB cluster snapshot is in **copying** status.

Console

To copy a DB cluster snapshot using the Amazon Web Services Management Console, see Copying a DB cluster snapshot with the Amazon Web Services Management Console.

Amazon CLI

To copy a DB cluster snapshot, use the Amazon CLI copy-db-cluster-snapshot command. If you are copying the snapshot to another Amazon Web Services Region, run the command in the Amazon Web Services Region to which the snapshot will be copied.

The following options are used to copy an encrypted DB cluster snapshot:

- `--source-db-cluster-snapshot-identifier` – The identifier for the encrypted DB cluster snapshot to be copied. If you are copying the snapshot to another Amazon Web Services Region, this identifier must be in the ARN format for the source Amazon Web Services Region.
- `--target-db-cluster-snapshot-identifier` – The identifier for the new copy of the encrypted DB cluster snapshot.
- `--kms-key-id` – The KMS key identifier for the key to use to encrypt the copy of the DB cluster snapshot.

  You can optionally use this option if the DB cluster snapshot is encrypted, you copy the snapshot in the same Amazon Web Services Region, and you want to specify a new KMS key to encrypt the copy. Otherwise, the copy of the DB cluster snapshot is encrypted with the same KMS key as the source DB cluster snapshot.

  You must use this option if the DB cluster snapshot is encrypted and you are copying the snapshot to another Amazon Web Services Region. In that case, you must specify a KMS key for the destination Amazon Web Services Region.

The following code example copies the encrypted DB cluster snapshot from the US West (Oregon) Region to the US East (N. Virginia) Region. The command is called in the US East (N. Virginia) Region.

Example

For Linux, macOS, or Unix:

```
aws rds copy-db-cluster-snapshot \
  --source-db-cluster-snapshot-identifier arn:aws-cn:rds:us-
west-2:123456789012:cluster-snapshot:aurora-cluster1-snapshot-20161115 \
  --target-db-cluster-snapshot-identifier myclustersnapshotcopy \
  --kms-key-id my-us-east-1-key
```

For Windows:

```
aws rds copy-db-cluster-snapshot ^
  --source-db-cluster-snapshot-identifier arn:aws-cn:rds:us-
west-2:123456789012:cluster-snapshot:aurora-cluster1-snapshot-20161115 ^
  --target-db-cluster-snapshot-identifier myclustersnapshotcopy ^
  --kms-key-id my-us-east-1-key
```

RDS API

To copy a DB cluster snapshot, use the Amazon RDS API CopyDBClusterSnapshot operation. If you are copying the snapshot to another Amazon Web Services Region, perform the action in the Amazon Web Services Region to which the snapshot will be copied.

The following parameters are used to copy an encrypted DB cluster snapshot:

- `SourceDBClusterSnapshotIdentifier` – The identifier for the encrypted DB cluster snapshot to be copied. If you are copying the snapshot to another Amazon Web Services Region, this identifier must be in the ARN format for the source Amazon Web Services Region.
- `TargetDBClusterSnapshotIdentifier` – The identifier for the new copy of the encrypted DB cluster snapshot.
- `KmsKeyId` – The KMS key identifier for the key to use to encrypt the copy of the DB cluster snapshot.

  You can optionally use this parameter if the DB cluster snapshot is encrypted, you copy the snapshot in the same Amazon Web Services Region, and you specify a new KMS key to use to

encrypt the copy. Otherwise, the copy of the DB cluster snapshot is encrypted with the same KMS key as the source DB cluster snapshot.

You must use this parameter if the DB cluster snapshot is encrypted and you are copying the snapshot to another Amazon Web Services Region. In that case, you must specify a KMS key for the destination Amazon Web Services Region.

- `PreSignedUrl` – If you are copying the snapshot to another Amazon Web Services Region, you must specify the `PreSignedUrl` parameter. The `PreSignedUrl` value must be a URL that contains a Signature Version 4 signed request for the `CopyDBClusterSnapshot` action to be called in the source Amazon Web Services Region where the DB cluster snapshot is copied from. To learn more about using a presigned URL, see CopyDBClusterSnapshot.

The following code example copies the encrypted DB cluster snapshot from the US West (Oregon) Region to the US East (N. Virginia) Region. The action is called in the US East (N. Virginia) Region.

Example

```
https://rds.us-east-1.amazonaws.com/
    ?Action=CopyDBClusterSnapshot
    &KmsKeyId=my-us-east-1-key
    &PreSignedUrl=https%253A%252F%252Frds.us-west-2.amazonaws.com%252F
         %253FAction%253DCopyDBClusterSnapshot
         %2526DestinationRegion%253Dus-east-1
         %2526KmsKeyId%253Dmy-us-east-1-key
         %2526SourceDBClusterSnapshotIdentifier%253Darn%25253Aaws%25253Ards
%25253Aus-west-2%25253A123456789012%25253Acluster-snapshot%25253Aaurora-cluster1-
snapshot-20161115
         %2526SignatureMethod%253DHmacSHA256
         %2526SignatureVersion%253D4
         %2526Version%253D2014-10-31
         %2526X-Amz-Algorithm%253DAWS4-HMAC-SHA256
         %2526X-Amz-Credential%253DAKIADQKE4SARGYLE%252F20161117%252Fus-west-2%252Frds
%252Faws4_request
         %2526X-Amz-Date%253D20161117T215409Z
         %2526X-Amz-Expires%253D3600
         %2526X-Amz-SignedHeaders%253Dcontent-type%253Bhost%253Buser-agent%253Bx-amz-
content-sha256%253Bx-amz-date
         %2526X-Amz-Signature
%253D255a0f17b4e717d3b67fad163c3ec26573b882c03a65523522cf890a67fca613
    &SignatureMethod=HmacSHA256
    &SignatureVersion=4
```

```
    &SourceDBClusterSnapshotIdentifier=arn%3Aaws%3Ards%3Aus-
west-2%3A123456789012%3Acluster-snapshot%3Aaurora-cluster1-snapshot-20161115
    &TargetDBClusterSnapshotIdentifier=myclustersnapshotcopy
    &Version=2014-10-31
    &X-Amz-Algorithm=AWS4-HMAC-SHA256
    &X-Amz-Credential=AKIADQKE4SARGYLE/20161117/us-east-1/rds/aws4_request
    &X-Amz-Date=20161117T221704Z
    &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
    &X-Amz-Signature=da4f2da66739d2e722c85fcfd225dc27bba7e2b8dbea8d8612434378e52adccf
```

Copying a DB cluster snapshot across accounts

You can enable other Amazon accounts to copy DB cluster snapshots that you specify by using the Amazon RDS API `ModifyDBClusterSnapshotAttribute` and `CopyDBClusterSnapshot` actions. The cross-account copying process works as follows, where Account A is making the snapshot available to copy, and Account B is copying it.

1. Using Account A, call `ModifyDBClusterSnapshotAttribute`, specifying **`restore`** for the `AttributeName` parameter, and the ID for Account B for the `ValuesToAdd` parameter.
2. (If the snapshot is encrypted) Using Account A, update the key policy for the KMS key, first adding the ARN of Account B as a `Principal`, and then allow the `kms:CreateGrant` action.
3. (If the snapshot is encrypted) Using Account B, choose or create a user and attach an IAM policy to that user that allows it to copy an encrypted DB cluster snapshot using your KMS key.
4. Using Account B, call `CopyDBClusterSnapshot` and use the `SourceDBClusterSnapshotIdentifier` parameter to specify the ARN of the DB cluster snapshot to be copied, which must include the ID for Account A.

To list all of the Amazon accounts permitted to restore a DB cluster snapshot, use the DescribeDBSnapshotAttributes or DescribeDBClusterSnapshotAttributes API operation.

To remove sharing permission for an Amazon account, use the `ModifyDBSnapshotAttribute` or `ModifyDBClusterSnapshotAttribute` action with `AttributeName` set to `restore` and the ID of the account to remove in the `ValuesToRemove` parameter.

Copying an unencrypted DB cluster snapshot to another account

Use the following procedure to copy an unencrypted DB cluster snapshot to another account in the same Amazon Web Services Region.

1. In the source account for the DB cluster snapshot, call `ModifyDBClusterSnapshotAttribute`, specifying **`restore`** for the `AttributeName` parameter, and the ID for the target account for the `ValuesToAdd` parameter.

   Running the following example using the account `987654321` permits two Amazon account identifiers, `123451234512` and `123456789012`, to restore the DB cluster snapshot named `manual-snapshot1`.

```
https://rds.us-west-2.amazonaws.com/
 ?Action=ModifyDBClusterSnapshotAttribute
 &AttributeName=restore
 &DBClusterSnapshotIdentifier=manual-snapshot1
 &SignatureMethod=HmacSHA256&SignatureVersion=4
 &ValuesToAdd.member.1=123451234512
 &ValuesToAdd.member.2=123456789012
 &Version=2014-10-31
 &X-Amz-Algorithm=AWS4-HMAC-SHA256
 &X-Amz-Credential=AKIADQKE4SARGYLE/20150922/us-west-2/rds/aws4_request
 &X-Amz-Date=20150922T220515Z
 &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
 &X-Amz-Signature=ef38f1ce3dab4e1dbf113d8d2a265c67d17ece1999ffd36be85714ed36dddbb3
```

2. In the target account, call `CopyDBClusterSnapshot` and use the `SourceDBClusterSnapshotIdentifier` parameter to specify the ARN of the DB cluster snapshot to be copied, which must include the ID for the source account.

   Running the following example using the account `123451234512` copies the DB cluster snapshot `aurora-cluster1-snapshot-20130805` from account `987654321` and creates a DB cluster snapshot named `dbclustersnapshot1`.

```
https://rds.us-west-2.amazonaws.com/
   ?Action=CopyDBClusterSnapshot
   &CopyTags=true
   &SignatureMethod=HmacSHA256
   &SignatureVersion=4
   &SourceDBClusterSnapshotIdentifier=arn:aws-cn:rds:us-west-2:987654321:cluster-
snapshot:aurora-cluster1-snapshot-20130805
   &TargetDBClusterSnapshotIdentifier=dbclustersnapshot1
   &Version=2013-09-09
   &X-Amz-Algorithm=AWS4-HMAC-SHA256
   &X-Amz-Credential=AKIADQKE4SARGYLE/20150922/us-west-2/rds/aws4_request
```

```
   &X-Amz-Date=20140429T175351Z
   &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-
date
   &X-Amz-
Signature=9164337efa99caf850e874a1cb7ef62f3cea29d0b448b9e0e7c53b288ddffed2
```

Copying an encrypted DB cluster snapshot to another account

Use the following procedure to copy an encrypted DB cluster snapshot to another account in the same Amazon Web Services Region.

1. In the source account for the DB cluster snapshot, call `ModifyDBClusterSnapshotAttribute`, specifying **`restore`** for the `AttributeName` parameter, and the ID for the target account for the `ValuesToAdd` parameter.

   Running the following example using the account `987654321` permits two Amazon account identifiers, `123451234512` and `123456789012`, to restore the DB cluster snapshot named `manual-snapshot1`.

   ```
   https://rds.us-west-2.amazonaws.com/
    ?Action=ModifyDBClusterSnapshotAttribute
    &AttributeName=restore
    &DBClusterSnapshotIdentifier=manual-snapshot1
    &SignatureMethod=HmacSHA256&SignatureVersion=4
    &ValuesToAdd.member.1=123451234512
    &ValuesToAdd.member.2=123456789012
    &Version=2014-10-31
    &X-Amz-Algorithm=AWS4-HMAC-SHA256
    &X-Amz-Credential=AKIADQKE4SARGYLE/20150922/us-west-2/rds/aws4_request
    &X-Amz-Date=20150922T220515Z
    &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
    &X-Amz-Signature=ef38f1ce3dab4e1dbf113d8d2a265c67d17ece1999ffd36be85714ed36dddbb3
   ```

2. In the source account for the DB cluster snapshot, create a custom KMS key in the same Amazon Web Services Region as the encrypted DB cluster snapshot. While creating the customer managed key, you give access to it for the target Amazon Web Services account. For more information, see Create a customer managed key and give access to it.
3. Copy and share the snapshot to the target Amazon Web Services account. For more information, see Copy and share the snapshot from the source account.

4. In the target account, call `CopyDBClusterSnapshot` and use the `SourceDBClusterSnapshotIdentifier` parameter to specify the ARN of the DB cluster snapshot to be copied, which must include the ID for the source account.

   Running the following example using the account `123451234512` copies the DB cluster snapshot `aurora-cluster1-snapshot-20130805` from account `987654321` and creates a DB cluster snapshot named `dbclustersnapshot1`.

```
https://rds.us-west-2.amazonaws.com/
   ?Action=CopyDBClusterSnapshot
   &CopyTags=true
   &SignatureMethod=HmacSHA256
   &SignatureVersion=4
   &SourceDBClusterSnapshotIdentifier=arn:aws-cn:rds:us-west-2:987654321:cluster-
snapshot:aurora-cluster1-snapshot-20130805
   &TargetDBClusterSnapshotIdentifier=dbclustersnapshot1
   &Version=2013-09-09
   &X-Amz-Algorithm=AWS4-HMAC-SHA256
   &X-Amz-Credential=AKIADQKE4SARGYLE/20150922/us-west-2/rds/aws4_request
   &X-Amz-Date=20140429T175351Z
   &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-
date
   &X-Amz-
Signature=9164337efa99caf850e874a1cb7ef62f3cea29d0b448b9e0e7c53b288ddffed2
```

Sharing a DB cluster snapshot

Using Amazon RDS, you can share a manual DB cluster snapshot in the following ways:

- Sharing a manual DB cluster snapshot, whether encrypted or unencrypted, enables authorized Amazon accounts to copy the snapshot.
- Sharing a manual DB cluster snapshot, whether encrypted or unencrypted, enables authorized Amazon accounts to directly restore a DB cluster from the snapshot instead of taking a copy of it and restoring from that.

> **Note**
>
> To share an automated DB cluster snapshot, create a manual DB cluster snapshot by copying the automated snapshot, and then share that copy. This process also applies to Amazon Backup–generated resources.

For more information on copying a snapshot, see DB cluster snapshot copying. For more information on restoring a DB instance from a DB cluster snapshot, see Restoring from a DB cluster snapshot.

For more information on restoring a DB cluster from a DB cluster snapshot, see Overview of backing up and restoring an Aurora DB cluster.

You can share a manual snapshot with up to 20 other Amazon Web Services accounts.

The following limitation applies when sharing manual snapshots with other Amazon Web Services accounts:

- When you restore a DB cluster from a shared snapshot using the Amazon Command Line Interface (Amazon CLI) or Amazon RDS API, you must specify the Amazon Resource Name (ARN) of the shared snapshot as the snapshot identifier.

Learn to share snapshots, public snapshots, and encrypted snapshots in the following sections. You can also learn how to stop sharing snapshots.

Topics

- Sharing a snapshot

- Sharing public snapshots
- Sharing encrypted snapshots
- Stopping snapshot sharing

Sharing a snapshot

You can share a DB cluster snapshot using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

Using the Amazon RDS console, you can share a manual DB cluster snapshot with up to 20 Amazon Web Services accounts. You can also use the console to stop sharing a manual snapshot with one or more accounts.

To share a manual DB cluster snapshot by using the Amazon RDS console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Snapshots**.
3. Select the manual snapshot that you want to share.
4. For **Actions**, choose **Share snapshot**.
5. Choose one of the following options for **DB snapshot visibility**.

   - If the source is unencrypted, choose **Public** to permit all Amazon Web Services accounts to restore a DB cluster from your manual DB cluster snapshot, or choose **Private** to permit only Amazon Web Services accounts that you specify to restore a DB cluster from your manual DB cluster snapshot.


     > **Warning**
     >
     > If you set **DB snapshot visibility** to **Public**, all Amazon Web Services accounts can restore a DB cluster from your manual DB cluster snapshot and have access to your data. Do not share any manual DB cluster snapshots that contain private information as **Public**.
     > For more information, see Sharing public snapshots.

- If the source is encrypted, **DB snapshot visibility** is set as **Private** because encrypted snapshots can't be shared as public.

> **Note**
>
> Snapshots that have been encrypted with the default Amazon KMS key can't be shared. For information on how to work around this issue, see Sharing encrypted snapshots.

6. For **Amazon Account ID**, enter the Amazon Web Services account identifier for an account that you want to permit to restore a DB cluster from your manual snapshot, and then choose **Add**. Repeat to include additional Amazon Web Services account identifiers, up to 20 Amazon Web Services accounts.

   If you make an error when adding an Amazon Web Services account identifier to the list of permitted accounts, you can delete it from the list by choosing **Delete** at the right of the incorrect Amazon Web Services account identifier.

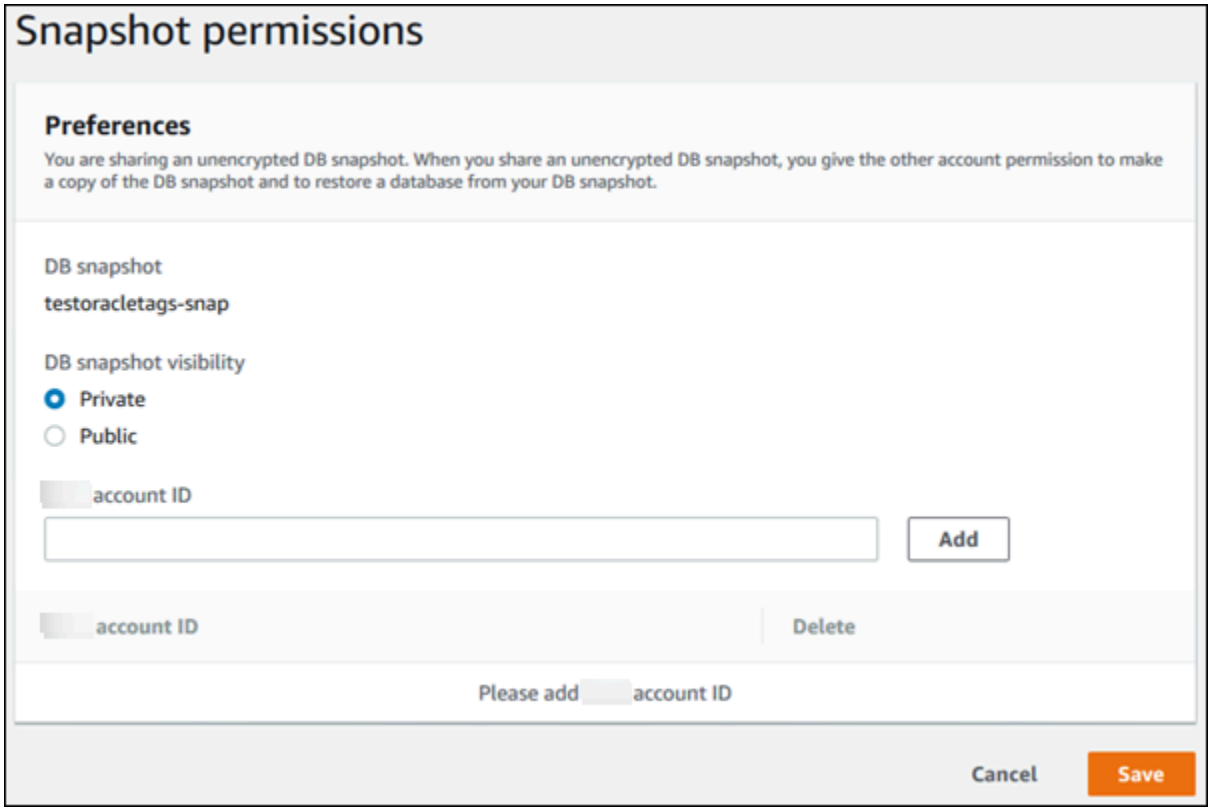

7. After you have added identifiers for all of the Amazon Web Services accounts that you want to permit to restore the manual snapshot, choose **Save** to save your changes.

Amazon CLI

To share a DB cluster snapshot, use the `aws rds modify-db-cluster-snapshot-attribute` command. Use the `--values-to-add` parameter to add a list of the IDs for the Amazon Web Services accounts that are authorized to restore the manual snapshot.

Example of sharing a snapshot with a single account

The following example enables Amazon Web Services account identifier `123456789012` to restore the DB cluster snapshot named `cluster-3-snapshot`.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-snapshot-attribute \
--db-cluster-snapshot-identifier cluster-3-snapshot \
--attribute-name restore \
--values-to-add 123456789012
```

For Windows:

```
aws rds modify-db-cluster-snapshot-attribute ^
--db-cluster-snapshot-identifier cluster-3-snapshot ^
--attribute-name restore ^
--values-to-add 123456789012
```

Example of sharing a snapshot with multiple accounts

The following example enables two Amazon Web Services account identifiers, `111122223333` and `444455556666`, to restore the DB cluster snapshot named `manual-cluster-snapshot1`.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-snapshot-attribute \
--db-cluster-snapshot-identifier manual-cluster-snapshot1 \
--attribute-name restore \
--values-to-add {"111122223333","444455556666"}
```

For Windows:

```
aws rds modify-db-cluster-snapshot-attribute ^
--db-cluster-snapshot-identifier manual-cluster-snapshot1 ^
--attribute-name restore ^
```

```
--values-to-add "[\"111122223333\",\"444455556666\"]"
```

> **Note**
>
> When using the Windows command prompt, you must escape double quotes (") in JSON code by prefixing them with a backslash (\).

To list the Amazon Web Services accounts enabled to restore a snapshot, use the `describe-db-cluster-snapshot-attributes` Amazon CLI command.

RDS API

You can also share a manual DB cluster snapshot with other Amazon Web Services accounts by using the Amazon RDS API. To do so, call the `ModifyDBClusterSnapshotAttribute` operation. Specify `restore` for `AttributeName`, and use the `ValuesToAdd` parameter to add a list of the IDs for the Amazon Web Services accounts that are authorized to restore the manual snapshot.

To make a manual snapshot public and restorable by all Amazon Web Services accounts, use the value `all`. However, take care not to add the `all` value for any manual snapshots that contain private information that you don't want to be available to all Amazon Web Services accounts. Also, don't specify `all` for encrypted snapshots, because making such snapshots public isn't supported.

To list all of the Amazon Web Services accounts permitted to restore a snapshot, use the `DescribeDBClusterSnapshotAttributes` API operation.

Sharing public snapshots

You can share an unencrypted manual snapshot as public, which makes the snapshot available to all Amazon Web Services accounts. Make sure when sharing a snapshot as public that none of your private information is included in the public snapshot.

When a snapshot is shared publicly, it gives all Amazon Web Services accounts permission both to copy the snapshot and to create DB clusters from it.

You aren't billed for the backup storage of public snapshots owned by other accounts. You're billed only for snapshots that you own.

If you copy a public snapshot, you own the copy. You're billed for the backup storage of your snapshot copy. If you create a DB cluster from a public snapshot, you're billed for that DB cluster. For Amazon Aurora pricing information, see the Aurora pricing page.

You can delete only the public snapshots that you own. To delete a shared or public snapshot, make sure to log into the Amazon Web Services account that owns the snapshot.

Viewing public snapshots owned by other Amazon Web Services accounts

You can view public snapshots owned by other accounts in a particular Amazon Web Services Region on the **Public** tab of the **Snapshots** page in the Amazon RDS console. Your snapshots (those owned by your account) don't appear on this tab.

To view public snapshots

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Snapshots**.
3. Choose the **Public** tab.

   The public snapshots appear. You can see which account owns a public snapshot in the **Owner** column.

   > **Note**
   >
   > You might have to modify the page preferences, by selecting the gear icon on the **Public snapshots** list, to see this column.

Viewing your own public snapshots

You can use the following Amazon CLI command (Unix only) to view the public snapshots owned by your Amazon Web Services account in a particular Amazon Web Services Region.

```
aws rds describe-db-cluster-snapshots --snapshot-type public --include-public |
 grep account_number
```

The output returned is similar to the following example if you have public snapshots.

```
"DBClusterSnapshotArn": "arn:aws-cn:rds:us-west-2:123456789012:cluster-
snapshot:myclustersnapshot1",
"DBClusterSnapshotArn": "arn:aws-cn:rds:us-west-2:123456789012:cluster-
snapshot:myclustersnapshot2",
```

Sharing public snapshots from deprecated DB engine versions

Restoring or copying public snapshots from deprecated DB engine versions isn't supported. To make your existing unsupported public snapshot available to restore or copy, perform the following steps:

1. Mark the snapshot as private.
2. Restore the snapshot.
3. Upgrade the restored DB cluster to a supported engine version.
4. Create a new snapshot.
5. Re-share the snapshot publicly.

Sharing encrypted snapshots

You can share DB cluster snapshots that have been encrypted "at rest" using the AES-256 encryption algorithm, as described in Encrypting Amazon Aurora resources.

The following restrictions apply to sharing encrypted snapshots:

- You can't share encrypted snapshots as public.
- You can't share a snapshot that has been encrypted using the default KMS key of the Amazon Web Services account that shared the snapshot.

  For more information about Amazon KMS key management for Amazon RDS, see Amazon KMS key management.

To work around the default KMS key issue, perform the following tasks:

1. Create a customer managed key and give access to it.
2. Copy and share the snapshot from the source account.
3. Copy the shared snapshot in the target account.

Create a customer managed key and give access to it

First you create a custom KMS key in the same Amazon Web Services Region as the encrypted DB cluster snapshot. While creating the customer managed key, you give access to it for another Amazon Web Services account.

To create a customer managed key and give access to it

1. Sign in to the Amazon Web Services Management Console from the source Amazon Web Services account.
2. Open the Amazon KMS console at https://console.amazonaws.cn/kms.
3. To change the Amazon Web Services Region, use the Region selector in the upper-right corner of the page.
4. In the navigation pane, choose **Customer managed keys**.
5. Choose **Create key**.
6. On the **Configure key** page:
   a. For **Key type**, select **Symmetric**.
   b. For **Key usage**, select **Encrypt and decrypt**.
   c. Expand **Advanced options**.
   d. For **Key material origin**, select **KMS**.
   e. For **Regionality**, select **Single-Region key**.
   f. Choose **Next**.
7. On the **Add labels** page:
   a. For **Alias**. enter a display name for your KMS key, for example **`share-snapshot`**.
   b. (Optional) Enter a description for your KMS key.
   c. (Optional) Add tags to your KMS key.
   d. Choose **Next**.
8. On the **Define key administrative permissions** page, choose **Next.**
9. On the **Define key usage permissions** page:
   a. For **Other Amazon Web Services accounts**, choose **Add another Amazon Web Services account**.
   b. Enter the ID of the Amazon Web Services account to which you want to give access.


      You can give access to multiple Amazon Web Services accounts.
   c. Choose **Next**.
10. Review your KMS key, then choose **Finish**.

Copy and share the snapshot from the source account

Next you copy the source DB cluster snapshot to a new snapshot using the customer managed key. Then you share it with the target Amazon Web Services account.

To copy and share the snapshot

1. Sign in to the Amazon Web Services Management Console from the source Amazon Web Services account.
2. Open the Amazon RDS console at https://console.amazonaws.cn/rds/
3. In the navigation pane, choose **Snapshots**.
4. Select the DB cluster snapshot you want to copy.
5. For **Actions**, choose **Copy snapshot**.
6. On the **Copy snapshot** page:
    a. For **Destination Region**, choose the Amazon Web Services Region where you created the customer managed key in the previous procedure.
    b. Enter the name of the DB cluster snapshot copy in **New DB Snapshot Identifier**.
    c. For **Amazon KMS key**, choose the customer managed key that you created.

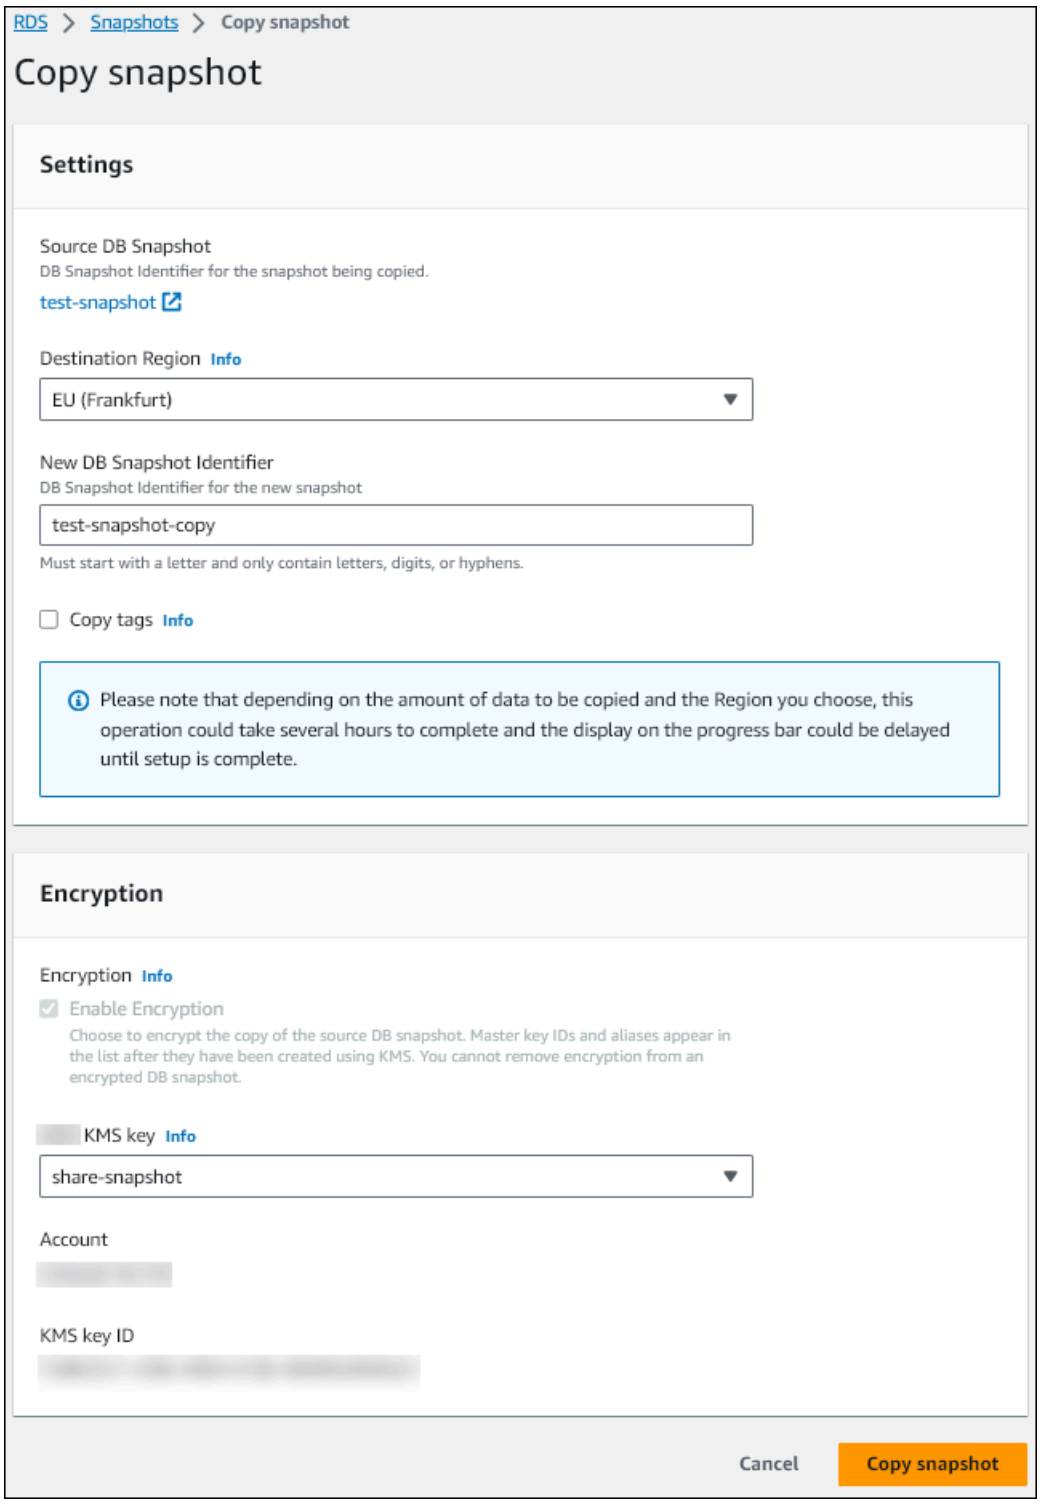

d. Choose **Copy snapshot**.

7. When the snapshot copy is available, select it.
8. For **Actions**, choose **Share snapshot**.
9. On the **Snapshot permissions** page:

a. Enter the **Amazon Web Services account ID** with which you're sharing the snapshot copy, then choose **Add**.

b. Choose **Save**.

The snapshot is shared.

Copy the shared snapshot in the target account

Now you can copy the shared snapshot in the target Amazon Web Services account.

To copy the shared snapshot

1. Sign in to the Amazon Web Services Management Console from the target Amazon Web Services account.
2. Open the Amazon RDS console at https://console.amazonaws.cn/rds/
3. In the navigation pane, choose **Snapshots**.
4. Choose the **Shared with me** tab.
5. Select the shared snapshot.
6. For **Actions**, choose **Copy snapshot**.
7. Choose your settings for copying the snapshot as in the previous procedure, but use an Amazon KMS key that belongs to the target account.

   Choose **Copy snapshot**.

Stopping snapshot sharing

To stop sharing a DB cluster snapshot, you remove permission from the target Amazon Web Services account.

Console

To stop sharing a manual DB cluster snapshot with an Amazon Web Services account

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Snapshots**.

3. Select the manual snapshot that you want to stop sharing.
4. Choose **Actions**, and then choose **Share snapshot**.
5. To remove permission for an Amazon Web Services account, choose **Delete** for the Amazon account identifier for that account from the list of authorized accounts.
6. Choose **Save** to save your changes.

CLI

To remove an Amazon Web Services account identifier from the list, use the `--values-to-remove` parameter.

Example of stopping snapshot sharing

The following example prevents Amazon Web Services account ID 444455556666 from restoring the snapshot.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-snapshot-attribute \
--db-cluster-snapshot-identifier manual-cluster-snapshot1 \
--attribute-name restore \
--values-to-remove 444455556666
```

For Windows:

```
aws rds modify-db-cluster-snapshot-attribute ^
--db-cluster-snapshot-identifier manual-cluster-snapshot1 ^
--attribute-name restore ^
--values-to-remove 444455556666
```

RDS API

To remove sharing permission for an Amazon Web Services account, use the `ModifyDBClusterSnapshotAttribute` operation with `AttributeName` set to `restore` and the `ValuesToRemove` parameter. To mark a manual snapshot as private, remove the value `all` from the values list for the `restore` attribute.

Exporting DB cluster data to Amazon S3

You can export data from a live Amazon Aurora DB cluster to an Amazon S3 bucket. The export process runs in the background and doesn't affect the performance of your active DB cluster.

By default, all data in the DB cluster is exported. However, you can choose to export specific sets of databases, schemas, or tables.

Amazon Aurora clones the DB cluster, extracts data from the clone, and stores the data in an Amazon S3 bucket. The data is stored in an Apache Parquet format that is compressed and consistent. Individual Parquet files are usually 1–10 MB in size.

The faster performance that you can get with exporting snapshot data for Aurora MySQL version 2 and version 3 doesn't apply to exporting DB cluster data. For more information, see Exporting DB cluster snapshot data to Amazon S3.

You're charged for exporting the entire DB cluster, whether you export all or partial data. For more information, see the Amazon Aurora pricing page.

After the data is exported, you can analyze the exported data directly through tools like Amazon Athena or Amazon Redshift Spectrum. For more information on using Athena to read Parquet data, see Parquet SerDe in the *Amazon Athena User Guide*. For more information on using Redshift Spectrum to read Parquet data, see COPY from columnar data formats in the *Amazon Redshift Database Developer Guide*.

Feature availability and support varies across specific versions of each database engine and across Amazon Web Services Regions. For more information on version and Region availability of exporting DB cluster data to S3, see Supported Regions and Aurora DB engines for exporting cluster data to Amazon S3.

You use the following process to export DB cluster data to an Amazon S3 bucket. For more details, see the following sections.

Overview of exporting DB cluster data

1. Identify the DB cluster whose data you want to export.
2. Set up access to the Amazon S3 bucket.

   A *bucket* is a container for Amazon S3 objects or files. To provide the information to access a bucket, take the following steps:

a. Identify the S3 bucket where the DB cluster data is to be exported. The S3 bucket must be in the same Amazon Region as the DB cluster. For more information, see Identifying the Amazon S3 bucket for export.

b. Create an Amazon Identity and Access Management (IAM) role that grants the DB cluster export task access to the S3 bucket. For more information, see Providing access to an Amazon S3 bucket using an IAM role.

3. Create a symmetric encryption Amazon KMS key for the server-side encryption. The KMS key is used by the cluster export task to set up Amazon KMS server-side encryption when writing the export data to S3.

   The KMS key policy must include both the `kms:CreateGrant` and `kms:DescribeKey` permissions. For more information on using KMS keys in Amazon Aurora, see Amazon KMS key management.

   If you have a deny statement in your KMS key policy, make sure to explicitly exclude the Amazon service principal `export.rds.amazonaws.com`.

   You can use a KMS key within your Amazon account, or you can use a cross-account KMS key. For more information, see Using a cross-account Amazon KMS key.

4. Export the DB cluster to Amazon S3 using the console or the `start-export-task` CLI command. For more information, see Creating DB cluster export tasks.

5. To access your exported data in the Amazon S3 bucket, see Uploading, downloading, and managing objects in the *Amazon Simple Storage Service User Guide*.

Learn to set up, export, monitor, cancel, and troubleshoot DB cluster export tasks in the following sections.

Topics

- Considerations for DB cluster exports
- Setting up access to an Amazon S3 bucket
- Creating DB cluster export tasks
- Monitoring DB cluster export tasks
- Canceling a DB cluster export task
- Troubleshooting DB cluster exports

Considerations for DB cluster exports

Use the following sections to learn about the limitations, file naming conventions, and data conversion and storage when exporting DB cluster data to Amazon S3.

Topics

- Limitations
- File naming convention
- Data conversion and storage format

Limitations

Exporting DB cluster data to Amazon S3 has the following limitations:

- You can't run multiple export tasks for the same DB cluster simultaneously. This applies to both full and partial exports.
- You can have up to five concurrent DB snapshot export tasks in progress per Amazon Web Services account.
- Aurora MySQL and Aurora PostgreSQL support exports to S3 only for the provisioned engine mode.
- Exports to S3 don't support S3 prefixes containing a colon (:).
- The following characters in the S3 file path are converted to underscores (_) during export:

```
\ ` " (space)
```

- If a database, schema, or table has characters in its name other than the following, partial export isn't supported. However, you can export the entire DB cluster.
  - Latin letters (A–Z)
  - Digits (0–9)
  - Dollar symbol ($)
  - Underscore (_)
- Spaces ( ) and certain characters aren't supported in database table column names. Tables with the following characters in column names are skipped during export:

```
, ; { } ( ) \n \t = (space)
```

- Tables with slashes (/) in their names are skipped during export.
- Aurora PostgreSQL temporary and unlogged tables are skipped during export.
- If the data contains a large object, such as a BLOB or CLOB, that is close to or greater than 500 MB, then the export fails.
- If a table contains a large row that is close to or greater than 2 GB, then the table is skipped during export.
- For partial exports, the `ExportOnly` list has a maximum size of 200 KB.
- We strongly recommend that you use a unique name for each export task. If you don't use a unique task name, you might receive the following error message:

  ExportTaskAlreadyExistsFault: An error occurred (ExportTaskAlreadyExists) when calling the StartExportTask operation: The export task with the ID *xxxxx* already exists.
- Because some tables might be skipped, we recommend that you verify row and table counts in the data after export.

File naming convention

Exported data for specific tables is stored in the format *base_prefix*/*files*, where the base prefix is the following:

```
export_identifier/database_name/schema_name.table_name/
```

For example:

```
export-1234567890123-459/rdststcluster/mycluster.DataInsert_7ADB5D19965123A2/
```

Output files use the following naming convention, where *partition_index* is alphanumeric:

```
partition_index/part-00000-random_uuid.format-based_extension
```

For example:

```
1/part-00000-c5a881bb-58ff-4ee6-1111-b41ecff340a3-c000.gz.parquet
    a/part-00000-d7a881cc-88cc-5ab7-2222-c41ecab340a4-c000.gz.parquet
```

The file naming convention is subject to change. Therefore, when reading target tables, we recommend that you read everything inside the base prefix for the table.

Data conversion and storage format

When you export a DB cluster to an Amazon S3 bucket, Amazon Aurora converts, exports, and stores data in the Parquet format. For more information, see Data conversion when exporting to an Amazon S3 bucket.

Setting up access to an Amazon S3 bucket

You identify the Amazon S3 bucket, then you give the DB cluster export task permission to access it.

Topics

- Identifying the Amazon S3 bucket for export
- Providing access to an Amazon S3 bucket using an IAM role
- Using a cross-account Amazon S3 bucket

Identifying the Amazon S3 bucket for export

Identify the Amazon S3 bucket to export the DB cluster data to. Use an existing S3 bucket or create a new S3 bucket.

> **Note**
>
> The S3 bucket must be in the same Amazon Region as the DB cluster.

For more information about working with Amazon S3 buckets, see the following in the *Amazon Simple Storage Service User Guide*:

- How do I view the properties for an S3 bucket?
- How do I enable default encryption for an Amazon S3 bucket?
- How do I create an S3 bucket?

Providing access to an Amazon S3 bucket using an IAM role

Before you export DB cluster data to Amazon S3, give the export tasks write-access permission to the Amazon S3 bucket.

To grant this permission, create an IAM policy that provides access to the bucket, then create an IAM role and attach the policy to the role. Later, you can assign the IAM role to your DB cluster export task.

> **Important**
>
> If you plan to use the Amazon Web Services Management Console to export your DB cluster, you can choose to create the IAM policy and the role automatically when you export the DB cluster. For instructions, see Creating DB cluster export tasks.

To give tasks access to Amazon S3

1. Create an IAM policy. This policy provides the bucket and object permissions that allow your DB cluster export task to access Amazon S3.

   In the policy, include the following required actions to allow the transfer of files from Amazon Aurora to an S3 bucket:

   - `s3:PutObject*`
   - `s3:GetObject*`
   - `s3:ListBucket`
   - `s3:DeleteObject*`
   - `s3:GetBucketLocation`

   In the policy, include the following resources to identify the S3 bucket and objects in the bucket. The following list of resources shows the Amazon Resource Name (ARN) format for accessing Amazon S3.

   - `arn:aws-cn:s3:::amzn-s3-demo-bucket`
   - `arn:aws-cn:s3:::amzn-s3-demo-bucket/*`

For more information about creating an IAM policy for Amazon Aurora, see Creating and using an IAM policy for IAM database access. See also Tutorial: Create and attach your first customer managed policy in the *IAM User Guide*.

The following Amazon CLI command creates an IAM policy named `ExportPolicy` with these options. It grants access to a bucket named *`amzn-s3-demo-bucket`*.

> **Note**
>
> After you create the policy, note the ARN of the policy. You need the ARN for a subsequent step when you attach the policy to an IAM role.

```
aws iam create-policy  --policy-name ExportPolicy --policy-document '{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "ExportPolicy",
            "Effect": "Allow",
            "Action": [
                "s3:PutObject*",
                "s3:ListBucket",
                "s3:GetObject*",
                "s3:DeleteObject*",
                "s3:GetBucketLocation"
            ],
            "Resource": [
                "arn:aws-cn:s3:::amzn-s3-demo-bucket",
                "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
            ]
        }
    ]
}'
```

2. Create an IAM role, so that Aurora can assume this IAM role on your behalf to access your Amazon S3 buckets. For more information, see Creating a role to delegate permissions to an IAM user in the *IAM User Guide*.

The following example shows using the Amazon CLI command to create a role named `rds-s3-export-role`.

```
aws iam create-role  --role-name rds-s3-export-role  --assume-role-policy-document
 '{
    "Version": "2012-10-17",
    "Statement": [
      {
        "Effect": "Allow",
        "Principal": {
           "Service": "export.rds.amazonaws.com"
         },
        "Action": "sts:AssumeRole"
      }
    ]
  }'
```

3. Attach the IAM policy that you created to the IAM role that you created.

   The following Amazon CLI command attaches the policy created earlier to the role named `rds-s3-export-role`. Replace *`your-policy-arn`* with the policy ARN that you noted in an earlier step.

```
aws iam attach-role-policy  --policy-arn your-policy-arn  --role-name rds-s3-
export-role
```

Using a cross-account Amazon S3 bucket

You can use S3 buckets across Amazon accounts. For more information, see Using a cross-account Amazon S3 bucket.

Creating DB cluster export tasks

Create export tasks to export data from your Aurora DB cluster to an Amazon S3 bucket. You can have up to five concurrent DB cluster export tasks in progress per Amazon Web Services account.

> **Note**
>
> Exporting DB cluster data can take a while depending on your database type and size. The export task first clones and scales the entire database before extracting the data to

Amazon S3. The task's progress during this phase displays as **Starting**. When the task switches to exporting data to S3, progress displays as **In progress**.
The time it takes for the export to complete depends on the data stored in the database. For example, tables with well-distributed numeric primary key or index columns export the fastest. Tables that don't contain a column suitable for partitioning and tables with only one index on a string-based column take longer because the export uses a slower single-threaded process.

You can export DB cluster data to Amazon S3 using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

If you use a Lambda function to export the DB cluster data, add the `kms:DescribeKey` action to the Lambda function policy. For more information, see Amazon Lambda permissions.

Console

The **Export to Amazon S3** console option appears only for DB clusters that can be exported to Amazon S3. A DB cluster might not be available for export because of the following reasons:

- The DB engine isn't supported for S3 export.
- The DB cluster version isn't supported for S3 export.
- S3 export isn't supported in the Amazon Region where the DB cluster was created.

To export DB cluster data

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the DB cluster whose data you want to export.
4. For **Actions**, choose **Export to Amazon S3**.

   The **Export to Amazon S3** window appears.
5. For **Export identifier**, enter a name to identify the export task. This value is also used for the name of the file created in the S3 bucket.
6. Choose the data to be exported:

- Choose **All** to export all data in the DB cluster.
- Choose **Partial** to export specific parts of the DB cluster. To identify which parts of the cluster to export, enter one or more databases, schemas, or tables for **Identifiers**, separated by spaces.

  Use the following format:

  ```
  database[.schema][.table] database2[.schema2][.table2] ... databasen[.scheman]
  [.tablen]
  ```

  For example:

  ```
  mydatabase mydatabase2.myschema1 mydatabase2.myschema2.mytable1
   mydatabase2.myschema2.mytable2
  ```

7. For **S3 bucket**, choose the bucket to export to.

   To assign the exported data to a folder path in the S3 bucket, enter the optional path for **S3 prefix**.

8. For **IAM role**, either choose a role that grants you write access to your chosen S3 bucket, or create a new role.

   - If you created a role by following the steps in Providing access to an Amazon S3 bucket using an IAM role, choose that role.
   - If you didn't create a role that grants you write access to your chosen S3 bucket, then choose **Create a new role** to create the role automatically. Next, enter a name for the role in **IAM role name**.

9. For **KMS key**, enter the ARN for the key to use for encrypting the exported data.
10. Choose **Export to Amazon S3**.

Amazon CLI

To export DB cluster data to Amazon S3 using the Amazon CLI, use the start-export-task command with the following required options:

- `--export-task-identifier`
- `--source-arn` – the Amazon Resource Name (ARN) of the DB cluster

- `--s3-bucket-name`
- `--iam-role-arn`
- `--kms-key-id`

In the following examples, the export task is named *my-cluster-export*, which exports the data to an S3 bucket named *amzn-s3-demo-destination-bucket*.

Example

For Linux, macOS, or Unix:

```
aws rds start-export-task \
    --export-task-identifier my-cluster-export \
    --source-arn arn:aws-cn:rds:us-west-2:123456789012:cluster:my-cluster \
    --s3-bucket-name amzn-s3-demo-destination-bucket \
    --iam-role-arn iam-role \
    --kms-key-id my-key
```

For Windows:

```
aws rds start-export-task ^
    --export-task-identifier my-DB-cluster-export ^
    --source-arn arn:aws-cn:rds:us-west-2:123456789012:cluster:my-cluster ^
    --s3-bucket-name amzn-s3-demo-destination-bucket ^
    --iam-role-arn iam-role ^
    --kms-key-id my-key
```

Sample output follows.

```
{
    "ExportTaskIdentifier": "my-cluster-export",
    "SourceArn": "arn:aws-cn:rds:us-west-2:123456789012:cluster:my-cluster",
    "S3Bucket": "amzn-s3-demo-destination-bucket",
    "IamRoleArn": "arn:aws-cn:iam:123456789012:role/ExportTest",
    "KmsKeyId": "my-key",
    "Status": "STARTING",
    "PercentProgress": 0,
    "TotalExtractedDataInGB": 0,
}
```

To provide a folder path in the S3 bucket for the DB cluster export, include the `--s3-prefix` option in the start-export-task command.

RDS API

To export DB cluster data to Amazon S3 using the Amazon RDS API, use the StartExportTask operation with the following required parameters:

- `ExportTaskIdentifier`
- `SourceArn` – the ARN of the DB cluster
- `S3BucketName`
- `IamRoleArn`
- `KmsKeyId`

Monitoring DB cluster export tasks

You can monitor DB cluster exports using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To monitor DB cluster exports

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Exports in Amazon S3**.

   DB cluster exports are indicated in the **Source type** column. Export status is displayed in the **Status** column.
3. To view detailed information about a specific DB cluster export, choose the export task.

Amazon CLI

To monitor DB cluster export tasks using the Amazon CLI, use the describe-export-tasks command.

The following example shows how to display current information about all of your DB cluster exports.

Example

```
aws rds describe-export-tasks

{
    "ExportTasks": [
        {
            "Status": "CANCELED",
            "TaskEndTime": "2022-11-01T17:36:46.961Z",
            "S3Prefix": "something",
            "S3Bucket": "amzn-s3-demo-bucket",
            "PercentProgress": 0,
            "KmsKeyId": "arn:aws-cn:kms:us-west-2:123456789012:key/K7MDENG/
bPxRfiCYEXAMPLEKEY",
            "ExportTaskIdentifier": "anewtest",
            "IamRoleArn": "arn:aws-cn:iam::123456789012:role/export-to-s3",
            "TotalExtractedDataInGB": 0,
            "SourceArn": "arn:aws-cn:rds:us-west-2:123456789012:cluster:parameter-
groups-test"
        },
{
            "Status": "COMPLETE",
            "TaskStartTime": "2022-10-31T20:58:06.998Z",
            "TaskEndTime": "2022-10-31T21:37:28.312Z",
            "WarningMessage": "{\"skippedTables\":[],\"skippedObjectives\":[],\"general
\":[{\"reason\":\"FAILED_TO_EXTRACT_TABLES_LIST_FOR_DATABASE\"}]}",
            "S3Prefix": "",
            "S3Bucket": "amzn-s3-demo-bucket1",
            "PercentProgress": 100,
            "KmsKeyId": "arn:aws-cn:kms:us-west-2:123456789012:key/2Zp9Utk/
h3yCo8nvbEXAMPLEKEY",
            "ExportTaskIdentifier": "thursday-events-test",
            "IamRoleArn": "arn:aws-cn:iam::123456789012:role/export-to-s3",
            "TotalExtractedDataInGB": 263,
            "SourceArn": "arn:aws-cn:rds:us-
west-2:123456789012:cluster:example-1-2019-10-31-06-44"
        },
        {
            "Status": "FAILED",
            "TaskEndTime": "2022-10-31T02:12:36.409Z",
            "FailureCause": "The S3 bucket amzn-s3-demo-bucket2 isn't located in the
 current Amazon Region. Please, review your S3 bucket name and retry the export.",
            "S3Prefix": "",
            "S3Bucket": "amzn-s3-demo-bucket2",
```

```
            "PercentProgress": 0,
            "KmsKeyId": "arn:aws-cn:kms:us-west-2:123456789012:key/2Zp9Utk/
h3yCo8nvbEXAMPLEKEY",
            "ExportTaskIdentifier": "wednesday-afternoon-test",
            "IamRoleArn": "arn:aws-cn:iam::123456789012:role/export-to-s3",
            "TotalExtractedDataInGB": 0,
            "SourceArn": "arn:aws-cn:rds:us-
west-2:123456789012:cluster:example-1-2019-10-30-06-45"
        }
    ]
}
```

To display information about a specific export task, include the `--export-task-identifier` option with the `describe-export-tasks` command. To filter the output, include the `--Filters` option. For more options, see the describe-export-tasks command.

RDS API

To display information about DB cluster exports using the Amazon RDS API, use the DescribeExportTasks operation.

To track completion of the export workflow or to initiate another workflow, you can subscribe to Amazon Simple Notification Service topics. For more information on Amazon SNS, see Working with Amazon RDS event notification.

Canceling a DB cluster export task

You can cancel a DB cluster export task using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

> **Note**
>
> Canceling an export task doesn't remove any data that was exported to Amazon S3. For information about how to delete the data using the console, see How do I delete objects from an S3 bucket? To delete the data using the CLI, use the delete-object command.

Console

To cancel a DB cluster export task

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Exports in Amazon S3**.

   DB cluster exports are indicated in the **Source type** column. Export status is displayed in the **Status** column.
3. Choose the export task that you want to cancel.
4. Choose **Cancel**.
5. Choose **Cancel export task** on the confirmation page.

Amazon CLI

To cancel an export task using the Amazon CLI, use the cancel-export-task command. The command requires the `--export-task-identifier` option.

Example

```
aws rds cancel-export-task --export-task-identifier my-export
{
    "Status": "CANCELING",
    "S3Prefix": "",
    "S3Bucket": "amzn-s3-demo-bucket",
    "PercentProgress": 0,
    "KmsKeyId": "arn:aws-cn:kms:us-west-2:123456789012:key/K7MDENG/bPxRfiCYEXAMPLEKEY",
    "ExportTaskIdentifier": "my-export",
    "IamRoleArn": "arn:aws-cn:iam::123456789012:role/export-to-s3",
    "TotalExtractedDataInGB": 0,
    "SourceArn": "arn:aws-cn:rds:us-west-2:123456789012:cluster:export-example-1"
}
```

RDS API

To cancel an export task using the Amazon RDS API, use the CancelExportTask operation with the `ExportTaskIdentifier` parameter.

Troubleshooting DB cluster exports

Use the following sections to help troubleshoot failure messages and PostgreSQL permission errors for DB cluster export tasks to Amazon S3.

Failure messages for Amazon S3 export tasks

The following table describes the messages that are returned when Amazon S3 export tasks fail.

Failure message	Description
Failed to find or access the source DB cluster: [cluster name]	The source DB cluster can't be cloned.
An unknown internal error occurred.	The task has failed because of an unknown error, exception, or failure.
An unknown internal error occurred writing the export task's metadata to the S3 bucket [bucket name].	The task has failed because of an unknown error, exception, or failure.
The RDS export failed to write the export task's metadata because it can't assume the IAM role [role ARN].	The export task assumes your IAM role to validate whether it is allowed to write metadata to your S3 bucket. If the task can't assume your IAM role, it fails.
The RDS export failed to write the export task's metadata to the S3 bucket [bucket name] using the IAM role [role ARN] with the KMS key [key ID]. Error code: [error code]	One or more permissions are missing, so the export task can't access the S3 bucket. This failure message is raised when receiving one of the following error codes: • `AWSSecurityTokenServiceException` with the error code `AccessDenied` • `AmazonS3Exception` with the error code `NoSuchBucket`, `AccessDenied`, `KMS.KMSInvalidStateException`, `403 Forbidden`, or `KMS.DisabledException`

Failure message	Description
	These error codes indicate that settings are misconfig ured for the IAM role, S3 bucket, or KMS key.
The IAM role [role ARN] isn't authorize d to call [S3 action] on the S3 bucket [bucket name]. Review your permissio ns and retry the export.	The IAM policy is misconfigured. Permission for the specific S3 action on the S3 bucket is missing, which causes the export task to fail.
KMS key check failed. Check the credentials on your KMS key and try again.	The KMS key credential check failed.
S3 credential check failed. Check the permissions on your S3 bucket and IAM policy.	The S3 credential check failed.
The S3 bucket [bucket name] isn't valid. Either it isn't located in the current Amazon Web Services Region or it doesn't exist. Review your S3 bucket name and retry the export.	The S3 bucket is invalid.
The S3 bucket [bucket name] isn't located in the current Amazon Web Services Region. Review your S3 bucket name and retry the export.	The S3 bucket is in the wrong Amazon Web Services Region.

Troubleshooting PostgreSQL permissions errors

When exporting PostgreSQL databases to Amazon S3, you might see a `PERMISSIONS_DO_NOT_EXIST` error stating that certain tables were skipped. This error usually occurs when the superuser, which you specified when creating the DB cluster, doesn't have permissions to access those tables.

To fix this error, run the following command:

```
GRANT ALL PRIVILEGES ON ALL TABLES IN SCHEMA schema_name TO superuser_name
```

For more information on superuser privileges, see Master user account privileges.

Exporting DB cluster snapshot data to Amazon S3

You can export DB cluster snapshot data to an Amazon S3 bucket. The export process runs in the background and doesn't affect the performance of your active DB cluster.

When you export a DB cluster snapshot, Amazon Aurora extracts data from the snapshot and stores it in an Amazon S3 bucket. You can export manual snapshots and automated system snapshots. By default, all data in the snapshot is exported. However, you can choose to export specific sets of databases, schemas, or tables.

> **Note**
>
> Exporting data from a DB cluster snapshot requires restoring the snapshot. Restore times are impacted by various factors, such as the amount of network traffic an Amazon Web Services Region receives relative to its available bandwidth. When there's a sudden increase in traffic, you might experience longer than expected completion times.
> An alternative for decreasing S3 export times for Aurora databases is live DB cluster export to S3. DB cluster export has shorter start times than DB snapshot export, because there's no need to restore a snapshot. For more information, see Exporting DB cluster data to Amazon S3.

The data is stored in an Apache Parquet format that is compressed and consistent. Individual Parquet files are usually 1–10 MB in size.

After the data is exported, you can analyze the exported data directly through tools like Amazon Athena or Amazon Redshift Spectrum. For more information on using Athena to read Parquet data, see Parquet SerDe in the *Amazon Athena User Guide*. For more information on using Redshift Spectrum to read Parquet data, see COPY from columnar data formats in the *Amazon Redshift Database Developer Guide*.

Feature availability and support varies across specific versions of each database engine and across Amazon Web Services Regions. For more information on version and Region availability of exporting DB cluster snapshot data to S3, see Supported Regions and Aurora DB engines for exporting snapshot data to Amazon S3.

You use the following process to export DB snapshot data to an Amazon S3 bucket. For more details, see the following sections.

Overview of exporting snapshot data

1. Identify the snapshot to export.

   Use an existing automated or manual snapshot, or create a manual snapshot of a DB instance.
2. Set up access to the Amazon S3 bucket.

   A *bucket* is a container for Amazon S3 objects or files. To provide the information to access a bucket, take the following steps:

   a. Identify the S3 bucket where the snapshot is to be exported to. The S3 bucket must be in the same Amazon Region as the snapshot. For more information, see Identifying the Amazon S3 bucket for export.

   b. Create an Amazon Identity and Access Management (IAM) role that grants the snapshot export task access to the S3 bucket. For more information, see Providing access to an Amazon S3 bucket using an IAM role.
3. Create a symmetric encryption Amazon KMS key for the server-side encryption. The KMS key is used by the snapshot export task to set up Amazon KMS server-side encryption when writing the export data to S3.

   The KMS key policy must include both the `kms:CreateGrant` and `kms:DescribeKey` permissions. For more information on using KMS keys in Amazon Aurora, see Amazon KMS key management.

   If you have a deny statement in your KMS key policy, make sure to explicitly exclude the Amazon service principal `export.rds.amazonaws.com`.

   You can use a KMS key within your Amazon account, or you can use a cross-account KMS key. For more information, see Using a cross-account Amazon KMS key.
4. Export the snapshot to Amazon S3 using the console or the `start-export-task` CLI command. For more information, see Creating snapshot export tasks.
5. To access your exported data in the Amazon S3 bucket, see Uploading, downloading, and managing objects in the *Amazon Simple Storage Service User Guide*.

Learn to set up, export, monitor, cancel, and troubleshoot DB cluster snapshot export tasks in the following sections.

Topics

- Considerations for DB cluster snapshot exports
- Setting up access to an Amazon S3 bucket
- Creating snapshot export tasks
- Monitoring snapshot exports
- Canceling a snapshot export task
- Export performance in Aurora MySQL
- Troubleshooting snapshot exports

Considerations for DB cluster snapshot exports

Limitations

Exporting DB snapshot data to Amazon S3 has the following limitations:

- You can't run multiple export tasks for the same DB cluster snapshot simultaneously. This applies to both full and partial exports.
- You can have up to five concurrent DB snapshot export tasks in progress per Amazon Web Services account.
- Exports to S3 don't support S3 prefixes containing a colon (:).
- The following characters in the S3 file path are converted to underscores (_) during export:

```
\ ` " (space)
```

- If a database, schema, or table has characters in its name other than the following, partial export isn't supported. However, you can export the entire DB snapshot.
  - Latin letters (A–Z)
  - Digits (0–9)
  - Dollar symbol ($)
  - Underscore (_)
- Spaces ( ) and certain characters aren't supported in database table column names. Tables with the following characters in column names are skipped during export:

```
, ; { } ( ) \n \t = (space)
```

- Tables with slashes (/) in their names are skipped during export.
- Aurora PostgreSQL temporary and unlogged tables are skipped during export.
- If the data contains a large object, such as a BLOB or CLOB, that is close to or greater than 500 MB, then the export fails.
- If a table contains a large row that is close to or greater than 2 GB, then the table is skipped during export.
- For partial exports, the `ExportOnly` list has a maximum size of 200 KB.
- We strongly recommend that you use a unique name for each export task. If you don't use a unique task name, you might receive the following error message:

  ExportTaskAlreadyExistsFault: An error occurred (ExportTaskAlreadyExists) when calling the StartExportTask operation: The export task with the ID *xxxxx* already exists.
- You can delete a snapshot while you're exporting its data to S3, but you're still charged for the storage costs for that snapshot until the export task has completed.
- You can't restore exported snapshot data from S3 to a new DB cluster.

File naming convention

Exported data for specific tables is stored in the format *base_prefix*/*files*, where the base prefix is the following:

```
export_identifier/database_name/schema_name.table_name/
```

For example:

```
export-1234567890123-459/rdststdb/rdststdb.DataInsert_7ADB5D19965123A2/
```

There are two conventions for how files are named.

- Current convention:

  ```
  batch_index/part-partition_index-random_uuid.format-based_extension
  ```

  The batch index is a sequence number that represents a batch of data read from the table. If we can't partition your table into small chunks to be exported in parallel, there will be multiple

batch indexes. The same thing happens if your table is partitioned into multiple tables. There will be multiple batch indexes, one for each of the table partitions of your main table.

If we can partition your table into small chunks to be read in parallel, there will be only the batch index 1 folder.

Inside the batch index folder, there are one or more Parquet files that contain your table's data. The prefix of the Parquet filename is `part-`*`partition_index`*. If your table is partitioned, there will be multiple files starting with the partition index `00000`.

There can be gaps in the partition index sequence. This happens because each partition is obtained from a ranged query in your table. If there is no data in the range of that partition, then that sequence number is skipped.

For example, suppose that the `id` column is the table's primary key, and its minimum and maximum values are `100` and `1000`. When we try to export this table with nine partitions, we read it with parallel queries such as the following:

```
SELECT * FROM table WHERE id <= 100 AND id < 200
 SELECT * FROM table WHERE id <= 200 AND id < 300
```

This should generate nine files, from `part-00000-`*`random_uuid`*`.gz.parquet` to `part-00008-`*`random_uuid`*`.gz.parquet`. However, if there are no rows with IDs between `200` and `350`, one of the completed partitions is empty, and no file is created for it. In the previous example, `part-00001-`*`random_uuid`*`.gz.parquet` isn't created.

- Older convention:

```
part-partition_index-random_uuid.format-based_extension
```

This is the same as the current convention, but without the *`batch_index`* prefix, for example:

```
part-00000-c5a881bb-58ff-4ee6-1111-b41ecff340a3-c000.gz.parquet
 part-00001-d7a881cc-88cc-5ab7-2222-c41ecab340a4-c000.gz.parquet
 part-00002-f5a991ab-59aa-7fa6-3333-d41eccd340a7-c000.gz.parquet
```

The file naming convention is subject to change. Therefore, when reading target tables, we recommend that you read everything inside the base prefix for the table.

Data conversion when exporting to an Amazon S3 bucket

When you export a DB snapshot to an Amazon S3 bucket, Amazon Aurora converts data to, exports data in, and stores data in the Parquet format. For more information about Parquet, see the Apache Parquet website.

Parquet stores all data as one of the following primitive types:

- BOOLEAN
- INT32
- INT64
- INT96
- FLOAT
- DOUBLE
- BYTE_ARRAY – A variable-length byte array, also known as binary
- FIXED_LEN_BYTE_ARRAY – A fixed-length byte array used when the values have a constant size

The Parquet data types are few to reduce the complexity of reading and writing the format. Parquet provides logical types for extending primitive types. A *logical type* is implemented as an annotation with the data in a `LogicalType` metadata field. The logical type annotation explains how to interpret the primitive type.

When the `STRING` logical type annotates a `BYTE_ARRAY` type, it indicates that the byte array should be interpreted as a UTF-8 encoded character string. After an export task completes, Amazon Aurora notifies you if any string conversion occurred. The underlying data exported is always the same as the data from the source. However, due to the encoding difference in UTF-8, some characters might appear different from the source when read in tools such as Athena.

For more information, see Parquet logical type definitions in the Parquet documentation.

Topics

- MySQL data type mapping to Parquet
- PostgreSQL data type mapping to Parquet

MySQL data type mapping to Parquet

The following table shows the mapping from MySQL data types to Parquet data types when data is converted and exported to Amazon S3.

Source data type	Parquet primitive type	Logical type annotation	Conversion notes
Numeric data types			
BIGINT	INT64		
BIGINT UNSIGNED	FIXED_LEN _BYTE_ARRAY(9)	DECIMAL(20,0)	Parquet supports only signed types, so the mapping requires an additional byte (8 plus 1) to store the BIGINT_UNSIGNED type.
BIT	BYTE_ARRAY		
DECIMAL	INT32	DECIMAL(p,s)	If the source value is less than 2^{31}, it's stored as INT32.
	INT64	DECIMAL(p,s)	If the source value is 2^{31} or greater, but less than 2^{63}, it's stored as INT64.
	FIXED_LEN _BYTE_ARRAY(N)	DECIMAL(p,s)	If the source value is 2^{63} or greater, it's stored as FIXED_LEN _BYTE_ARRAY(N).
	BYTE_ARRAY	STRING	Parquet doesn't support Decimal precision greater

Source data type	Parquet primitive type	Logical type annotation	Conversion notes
			than 38. The Decimal value is converted to a string in a BYTE_ARRAY type and encoded as UTF8.
DOUBLE	DOUBLE		
FLOAT	DOUBLE		
INT	INT32		
INT UNSIGNED	INT64		
MEDIUMINT	INT32		
MEDIUMINT UNSIGNED	INT64		
NUMERIC	INT32	DECIMAL(p,s)	If the source value is less than 2^{31}, it's stored as INT32.
	INT64	DECIMAL(p,s)	If the source value is 2^{31} or greater, but less than 2^{63}, it's stored as INT64.
	FIXED_LEN_ARRAY(N)	DECIMAL(p,s)	If the source value is 2^{63} or greater, it's stored as FIXED_LEN _BYTE_ARRAY(N).

Source data type	Parquet primitive type	Logical type annotation	Conversion notes
	BYTE_ARRAY	STRING	Parquet doesn't support Numeric precision greater than 38. This Numeric value is converted to a string in a BYTE_ARRAY type and encoded as UTF8.
SMALLINT	INT32		
SMALLINT UNSIGNED	INT32		
TINYINT	INT32		
TINYINT UNSIGNED	INT32	INT(16, true)	
String data types			
BINARY	BYTE_ARRAY		
BLOB	BYTE_ARRAY		
CHAR	BYTE_ARRAY		
ENUM	BYTE_ARRAY	STRING	
LINESTRING	BYTE_ARRAY		
LONGBLOB	BYTE_ARRAY		
LONGTEXT	BYTE_ARRAY	STRING	
MEDIUMBLOB	BYTE_ARRAY		
MEDIUMTEXT	BYTE_ARRAY	STRING	

Source data type	Parquet primitive type	Logical type annotation	Conversion notes
MULTILINESTRING	BYTE_ARRAY		
SET	BYTE_ARRAY	STRING	
TEXT	BYTE_ARRAY	STRING	
TINYBLOB	BYTE_ARRAY		
TINYTEXT	BYTE_ARRAY	STRING	
VARBINARY	BYTE_ARRAY		
VARCHAR	BYTE_ARRAY	STRING	
Date and time data types			
DATE	BYTE_ARRAY	STRING	A date is converted to a string in a BYTE_ARRAY type and encoded as UTF8.
DATETIME	INT64	TIMESTAMP_MICROS	
TIME	BYTE_ARRAY	STRING	A TIME type is converted to a string in a BYTE_ARRAY and encoded as UTF8.
TIMESTAMP	INT64	TIMESTAMP_MICROS	
YEAR	INT32		
Geometric data types			
GEOMETRY	BYTE_ARRAY		

Source data type	Parquet primitive type	Logical type annotation	Conversion notes
GEOMETRYCOLLECTION	BYTE_ARRAY		
MULTIPOINT	BYTE_ARRAY		
MULTIPOLYGON	BYTE_ARRAY		
POINT	BYTE_ARRAY		
POLYGON	BYTE_ARRAY		
JSON data type			
JSON	BYTE_ARRAY	STRING	

PostgreSQL data type mapping to Parquet

The following table shows the mapping from PostgreSQL data types to Parquet data types when data is converted and exported to Amazon S3.

PostgreSQL data type	Parquet primitive type	Logical type annotation	Mapping notes
Numeric data types			
BIGINT	INT64		
BIGSERIAL	INT64		
DECIMAL	BYTE_ARRAY	STRING	A DECIMAL type is converted to a string in a BYTE_ARRAY type and encoded as UTF8.

PostgreSQL data type	Parquet primitive type	Logical type annotation	Mapping notes
			This conversion is to avoid complications due to data precision and data values that are not a number (NaN).
DOUBLE PRECISION	DOUBLE		
INTEGER	INT32		
MONEY	BYTE_ARRAY	STRING	
REAL	FLOAT		
SERIAL	INT32		
SMALLINT	INT32	INT(16, true)	
SMALLSERIAL	INT32	INT(16, true)	
String and related data types			
ARRAY	BYTE_ARRAY	STRING	An array is converted to a string and encoded as BINARY (UTF8). This conversion is to avoid complicat ions due to data precision, data values that are not a number (NaN), and time data values.

PostgreSQL data type	Parquet primitive type	Logical type annotation	Mapping notes
BIT	BYTE_ARRAY	STRING	
BIT VARYING	BYTE_ARRAY	STRING	
BYTEA	BINARY		
CHAR	BYTE_ARRAY	STRING	
CHAR(N)	BYTE_ARRAY	STRING	
ENUM	BYTE_ARRAY	STRING	
NAME	BYTE_ARRAY	STRING	
TEXT	BYTE_ARRAY	STRING	
TEXT SEARCH	BYTE_ARRAY	STRING	
VARCHAR(N)	BYTE_ARRAY	STRING	
XML	BYTE_ARRAY	STRING	
Date and time data types			
DATE	BYTE_ARRAY	STRING	
INTERVAL	BYTE_ARRAY	STRING	
TIME	BYTE_ARRAY	STRING	
TIME WITH TIME ZONE	BYTE_ARRAY	STRING	
TIMESTAMP	BYTE_ARRAY	STRING	
TIMESTAMP WITH TIME ZONE	BYTE_ARRAY	STRING	
Geometric data types			

PostgreSQL data type	Parquet primitive type	Logical type annotation	Mapping notes
BOX	BYTE_ARRAY	STRING	
CIRCLE	BYTE_ARRAY	STRING	
LINE	BYTE_ARRAY	STRING	
LINESEGMENT	BYTE_ARRAY	STRING	
PATH	BYTE_ARRAY	STRING	
POINT	BYTE_ARRAY	STRING	
POLYGON	BYTE_ARRAY	STRING	
JSON data types			
JSON	BYTE_ARRAY	STRING	
JSONB	BYTE_ARRAY	STRING	
Other data types			
BOOLEAN	BOOLEAN		
CIDR	BYTE_ARRAY	STRING	Network data type
COMPOSITE	BYTE_ARRAY	STRING	
DOMAIN	BYTE_ARRAY	STRING	
INET	BYTE_ARRAY	STRING	Network data type
MACADDR	BYTE_ARRAY	STRING	
OBJECT IDENTIFIER	N/A		
PG_LSN	BYTE_ARRAY	STRING	
RANGE	BYTE_ARRAY	STRING	

PostgreSQL data type	Parquet primitive type	Logical type annotation	Mapping notes
UUID	BYTE_ARRAY	STRING	

Setting up access to an Amazon S3 bucket

You identify the Amazon S3 bucket, then you give the snapshot permission to access it.

Topics

- Identifying the Amazon S3 bucket for export
- Providing access to an Amazon S3 bucket using an IAM role
- Using a cross-account Amazon S3 bucket
- Using a cross-account Amazon KMS key

Identifying the Amazon S3 bucket for export

Identify the Amazon S3 bucket to export the DB snapshot to. Use an existing S3 bucket or create a new S3 bucket.

> **Note**
>
> The S3 bucket to export to must be in the same Amazon Region as the snapshot.

For more information about working with Amazon S3 buckets, see the following in the *Amazon Simple Storage Service User Guide*:

- How do I view the properties for an S3 bucket?
- How do I enable default encryption for an Amazon S3 bucket?
- How do I create an S3 bucket?

Providing access to an Amazon S3 bucket using an IAM role

Before you export DB snapshot data to Amazon S3, give the snapshot export tasks write-access permission to the Amazon S3 bucket.

To grant this permission, create an IAM policy that provides access to the bucket, then create an IAM role and attach the policy to the role. Later, you can assign the IAM role to your snapshot export task.

> **Important**
>
> If you plan to use the Amazon Web Services Management Console to export your snapshot, you can choose to create the IAM policy and the role automatically when you export the snapshot. For instructions, see Creating snapshot export tasks.

To give DB snapshot tasks access to Amazon S3

1. Create an IAM policy. This policy provides the bucket and object permissions that allow your snapshot export task to access Amazon S3.

   In the policy, include the following required actions to allow the transfer of files from Amazon Aurora to an S3 bucket:

   - `s3:PutObject*`
   - `s3:GetObject*`
   - `s3:ListBucket`
   - `s3:DeleteObject*`
   - `s3:GetBucketLocation`

   In the policy, include the following resources to identify the S3 bucket and objects in the bucket. The following list of resources shows the Amazon Resource Name (ARN) format for accessing Amazon S3.

   - `arn:aws-cn:s3:::amzn-s3-demo-bucket`
   - `arn:aws-cn:s3:::amzn-s3-demo-bucket/*`

   For more information on creating an IAM policy for Amazon Aurora, see Creating and using an IAM policy for IAM database access. See also Tutorial: Create and attach your first customer managed policy in the *IAM User Guide*.

The following Amazon CLI command creates an IAM policy named `ExportPolicy` with these options. It grants access to a bucket named *amzn-s3-demo-bucket*.

> **Note**
>
> After you create the policy, note the ARN of the policy. You need the ARN for a subsequent step when you attach the policy to an IAM role.

```
aws iam create-policy  --policy-name ExportPolicy --policy-document '{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "ExportPolicy",
            "Effect": "Allow",
            "Action": [
                "s3:PutObject*",
                "s3:ListBucket",
                "s3:GetObject*",
                "s3:DeleteObject*",
                "s3:GetBucketLocation"
            ],
            "Resource": [
                "arn:aws-cn:s3:::amzn-s3-demo-bucket",
                "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
            ]
        }
    ]
}'
```

2. Create an IAM role, so that Aurora can assume this IAM role on your behalf to access your Amazon S3 buckets. For more information, see Creating a role to delegate permissions to an IAM user in the *IAM User Guide*.

   The following example shows using the Amazon CLI command to create a role named `rds-s3-export-role`.

```
aws iam create-role  --role-name rds-s3-export-role  --assume-role-policy-document
 '{
     "Version": "2012-10-17",
```

```
    "Statement": [
      {
        "Effect": "Allow",
        "Principal": {
           "Service": "export.rds.amazonaws.com"
         },
        "Action": "sts:AssumeRole"
      }
    ]
  }'
```

3. Attach the IAM policy that you created to the IAM role that you created.

   The following Amazon CLI command attaches the policy created earlier to the role named `rds-s3-export-role`. Replace *`your-policy-arn`* with the policy ARN that you noted in an earlier step.

```
aws iam attach-role-policy  --policy-arn your-policy-arn  --role-name rds-s3-
export-role
```

Using a cross-account Amazon S3 bucket

You can use Amazon S3 buckets across Amazon accounts. To use a cross-account bucket, add a bucket policy to allow access to the IAM role that you're using for the S3 exports. For more information, see Example 2: Bucket owner granting cross-account bucket permissions.

- Attach a bucket policy to your bucket, as shown in the following example.

  JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Principal": {
                "AWS": "arn:aws-cn:iam::123456789012:role/Admin"
            },
            "Action": [
                "s3:PutObject*",
```

```
                "s3:ListBucket",
                "s3:GetObject*",
                "s3:DeleteObject*",
                "s3:GetBucketLocation"
            ],
            "Resource": [
                "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket",
                "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket/*"
            ]
        }
    ]
}
```

Using a cross-account Amazon KMS key

You can use a cross-account Amazon KMS key to encrypt Amazon S3 exports. First, you add a key policy to the local account, then you add IAM policies in the external account. For more information, see Allowing users in other accounts to use a KMS key.

To use a cross-account KMS key

1. Add a key policy to the local account.

   The following example gives `ExampleRole` and `ExampleUser` in the external account 444455556666 permissions in the local account 123456789012.

```
{
    "Sid": "Allow an external account to use this KMS key",
    "Effect": "Allow",
    "Principal": {
        "AWS": [
            "arn:aws-cn:iam::444455556666:role/ExampleRole",
            "arn:aws-cn:iam::444455556666:user/ExampleUser"
        ]
    },
    "Action": [
        "kms:Encrypt",
        "kms:Decrypt",
        "kms:ReEncrypt*",
        "kms:GenerateDataKey*",
        "kms:CreateGrant",
```

```
        "kms:DescribeKey",
        "kms:RetireGrant"
    ],
    "Resource": "*"
}
```

2. Add IAM policies to the external account.

   The following example IAM policy allows the principal to use the KMS key in account 123456789012 for cryptographic operations. To give this permission to `ExampleRole` and `ExampleUser` in account 444455556666, attach the policy to them in that account.

```
{
    "Sid": "Allow use of KMS key in account 123456789012",
    "Effect": "Allow",
    "Action": [
        "kms:Encrypt",
        "kms:Decrypt",
        "kms:ReEncrypt*",
        "kms:GenerateDataKey*",
        "kms:CreateGrant",
        "kms:DescribeKey",
        "kms:RetireGrant"
    ],
    "Resource": "arn:aws-cn:kms:us-
west-2:123456789012:key/1234abcd-12ab-34cd-56ef-1234567890ab"
}
```

Creating snapshot export tasks

Create snapshot export tasks to export data from your snapshot to an Amazon S3 bucket. You can have up to five concurrent DB snapshot export tasks in progress per Amazon Web Services account.

> **Note**
>
> Exporting RDS snapshots can take a while depending on your database type and size. The export task first restores and scales the entire database before extracting the data to Amazon S3. The task's progress during this phase displays as **Starting**. When the task switches to exporting data to S3, progress displays as **In progress**.

The time it takes for the export to complete depends on the data stored in the database. For example, tables with well-distributed numeric primary key or index columns export the fastest. Tables that don't contain a column suitable for partitioning and tables with only one index on a string-based column take longer. This longer export time occurs because the export uses a slower single-threaded process.

You can export a DB snapshot to Amazon S3 using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

If you use a Lambda function to export a snapshot, add the `kms:DescribeKey` action to the Lambda function policy. For more information, see Amazon Lambda permissions.

Console

The **Export to Amazon S3** console option appears only for snapshots that can be exported to Amazon S3. A snapshot might not be available for export because of the following reasons:

- The DB engine isn't supported for S3 export.
- The DB instance version isn't supported for S3 export.
- S3 export isn't supported in the Amazon Region where the snapshot was created.

To export a DB snapshot

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Snapshots**.
3. From the tabs, choose the type of snapshot that you want to export.
4. In the list of snapshots, choose the snapshot that you want to export.
5. For **Actions**, choose **Export to Amazon S3**.

   The **Export to Amazon S3** window appears.
6. For **Export identifier**, enter a name to identify the export task. This value is also used for the name of the file created in the S3 bucket.
7. Choose the data to be exported:

   - Choose **All** to export all data in the snapshot.

- Choose **Partial** to export specific parts of the snapshot. To identify which parts of the snapshot to export, enter one or more databases, schemas, or tables for **Identifiers**, separated by spaces.

  Use the following format:

  ```
  database[.schema][.table] database2[.schema2][.table2] ... databasen[.scheman]
  [.tablen]
  ```

  For example:

  ```
  mydatabase mydatabase2.myschema1 mydatabase2.myschema2.mytable1
   mydatabase2.myschema2.mytable2
  ```

8. For **S3 bucket**, choose the bucket to export to.

   To assign the exported data to a folder path in the S3 bucket, enter the optional path for **S3 prefix**.

9. For **IAM role**, either choose a role that grants you write access to your chosen S3 bucket, or create a new role.

   - If you created a role by following the steps in Providing access to an Amazon S3 bucket using an IAM role, choose that role.
   - If you didn't create a role that grants you write access to your chosen S3 bucket, then choose **Create a new role** to create the role automatically. Next, enter a name for the role in **IAM role name**.

10. For **Amazon KMS key**, enter the ARN for the key to use for encrypting the exported data.
11. Choose **Export to Amazon S3**.

Amazon CLI

To export a DB snapshot to Amazon S3 using the Amazon CLI, use the start-export-task command with the following required options:

- `--export-task-identifier`
- `--source-arn`
- `--s3-bucket-name`

- `--iam-role-arn`
- `--kms-key-id`

In the following examples, the snapshot export task is named *my-snapshot-export*, which exports a snapshot to an S3 bucket named *amzn-s3-demo-destination-bucket*.

Example

For Linux, macOS, or Unix:

```
aws rds start-export-task \
    --export-task-identifier my-snapshot-export \
    --source-arn arn:aws-cn:rds:Amazon_Region:123456789012:snapshot:snapshot-name \
    --s3-bucket-name amzn-s3-demo-destination-bucket \
    --iam-role-arn iam-role \
    --kms-key-id my-key
```

For Windows:

```
aws rds start-export-task ^
    --export-task-identifier my-snapshot-export ^
    --source-arn arn:aws-cn:rds:Amazon_Region:123456789012:snapshot:snapshot-name ^
    --s3-bucket-name amzn-s3-demo-destination-bucket ^
    --iam-role-arn iam-role ^
    --kms-key-id my-key
```

Sample output follows.

```
{
    "Status": "STARTING",
    "IamRoleArn": "iam-role",
    "ExportTime": "2019-08-12T01:23:53.109Z",
    "S3Bucket": "amzn-s3-demo-destination-bucket",
    "PercentProgress": 0,
    "KmsKeyId": "my-key",
    "ExportTaskIdentifier": "my-snapshot-export",
    "TotalExtractedDataInGB": 0,
    "TaskStartTime": "2019-11-13T19:46:00.173Z",
    "SourceArn": "arn:aws-cn:rds:Amazon_Region:123456789012:snapshot:snapshot-name"
}
```

To provide a folder path in the S3 bucket for the snapshot export, include the `--s3-prefix` option in the start-export-task command.

RDS API

To export a DB snapshot to Amazon S3 using the Amazon RDS API, use the StartExportTask operation with the following required parameters:

- `ExportTaskIdentifier`
- `SourceArn`
- `S3BucketName`
- `IamRoleArn`
- `KmsKeyId`

Monitoring snapshot exports

You can monitor DB snapshot exports using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To monitor DB snapshot exports

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Exports in Amazon S3**.

   DB snapshot exports are indicated in the **Source type** column. Export status is displayed in the **Status** column.
3. To view detailed information about a specific snapshot export, choose the export task.

Amazon CLI

To monitor DB snapshot exports using the Amazon CLI, use the describe-export-tasks command.

The following example shows how to display current information about all of your snapshot exports.

Example

```
aws rds describe-export-tasks

{
    "ExportTasks": [
        {
            "Status": "CANCELED",
            "TaskEndTime": "2019-11-01T17:36:46.961Z",
            "S3Prefix": "something",
            "ExportTime": "2019-10-24T20:23:48.364Z",
            "S3Bucket": "amzn-s3-demo-bucket",
            "PercentProgress": 0,
            "KmsKeyId": "arn:aws-cn:kms:Amazon_Region:123456789012:key/K7MDENG/
bPxRfiCYEXAMPLEKEY",
            "ExportTaskIdentifier": "anewtest",
            "IamRoleArn": "arn:aws-cn:iam::123456789012:role/export-to-s3",
            "TotalExtractedDataInGB": 0,
            "TaskStartTime": "2019-10-25T19:10:58.885Z",
            "SourceArn": "arn:aws-cn:rds:Amazon_Region:123456789012:snapshot:parameter-
groups-test"
        },
{
            "Status": "COMPLETE",
            "TaskEndTime": "2019-10-31T21:37:28.312Z",
            "WarningMessage": "{\"skippedTables\":[],\"skippedObjectives\":[],\"general
\":[{\"reason\":\"FAILED_TO_EXTRACT_TABLES_LIST_FOR_DATABASE\"}]}",
            "S3Prefix": "",
            "ExportTime": "2019-10-31T06:44:53.452Z",
            "S3Bucket": "amzn-s3-demo-bucket1",
            "PercentProgress": 100,
            "KmsKeyId": "arn:aws-cn:kms:Amazon_Region:123456789012:key/2Zp9Utk/
h3yCo8nvbEXAMPLEKEY",
            "ExportTaskIdentifier": "thursday-events-test",
            "IamRoleArn": "arn:aws-cn:iam::123456789012:role/export-to-s3",
            "TotalExtractedDataInGB": 263,
            "TaskStartTime": "2019-10-31T20:58:06.998Z",
            "SourceArn": "arn:aws-
cn:rds:Amazon_Region:123456789012:snapshot:rds:example-1-2019-10-31-06-44"
        },
        {
            "Status": "FAILED",
            "TaskEndTime": "2019-10-31T02:12:36.409Z",
```

```
            "FailureCause": "The S3 bucket my-exports isn't located in the current
 Amazon Region. Please, review your S3 bucket name and retry the export.",
            "S3Prefix": "",
            "ExportTime": "2019-10-30T06:45:04.526Z",
            "S3Bucket": "amzn-s3-demo-bucket2",
            "PercentProgress": 0,
            "KmsKeyId": "arn:aws-cn:kms:Amazon_Region:123456789012:key/2Zp9Utk/
h3yCo8nvbEXAMPLEKEY",
            "ExportTaskIdentifier": "wednesday-afternoon-test",
            "IamRoleArn": "arn:aws-cn:iam::123456789012:role/export-to-s3",
            "TotalExtractedDataInGB": 0,
            "TaskStartTime": "2019-10-30T22:43:40.034Z",
            "SourceArn": "arn:aws-
cn:rds:Amazon_Region:123456789012:snapshot:rds:example-1-2019-10-30-06-45"
        }
    ]
}
```

To display information about a specific snapshot export, include the `--export-task-identifier` option with the `describe-export-tasks` command. To filter the output, include the `--Filters` option. For more options, see the `describe-export-tasks` command.

RDS API

To display information about DB snapshot exports using the Amazon RDS API, use the DescribeExportTasks operation.

To track completion of the export workflow or to initiate another workflow, you can subscribe to Amazon Simple Notification Service topics. For more information on Amazon SNS, see Working with Amazon RDS event notification.

Canceling a snapshot export task

You can cancel a DB snapshot export task using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

> **Note**
>
> Canceling a snapshot export task doesn't remove any data that was exported to Amazon S3. For information about how to delete the data using the console, see How do I delete

objects from an S3 bucket? To delete the data using the CLI, use the delete-object command.

Console

To cancel a snapshot export task

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Exports in Amazon S3**.

   DB snapshot exports are indicated in the **Source type** column. Export status is displayed in the **Status** column.
3. Choose the snapshot export task that you want to cancel.
4. Choose **Cancel**.
5. Choose **Cancel export task** on the confirmation page.

Amazon CLI

To cancel a snapshot export task using the Amazon CLI, use the cancel-export-task command. The command requires the `--export-task-identifier` option.

Example

```
aws rds cancel-export-task --export-task-identifier my_export
{
    "Status": "CANCELING",
    "S3Prefix": "",
    "ExportTime": "2019-08-12T01:23:53.109Z",
    "S3Bucket": "amzn-s3-demo-bucket",
    "PercentProgress": 0,
    "KmsKeyId": "arn:aws-cn:kms:Amazon_Region:123456789012:key/K7MDENG/
bPxRfiCYEXAMPLEKEY",
    "ExportTaskIdentifier": "my_export",
    "IamRoleArn": "arn:aws-cn:iam::123456789012:role/export-to-s3",
    "TotalExtractedDataInGB": 0,
    "TaskStartTime": "2019-11-13T19:46:00.173Z",
    "SourceArn": "arn:aws-cn:rds:Amazon_Region:123456789012:snapshot:export-example-1"
```

```
}
```

RDS API

To cancel a snapshot export task using the Amazon RDS API, use the CancelExportTask operation with the `ExportTaskIdentifier` parameter.

Export performance in Aurora MySQL

Aurora MySQL version 2 and version 3 DB cluster snapshots use an advanced export mechanism to improve performance and reduce export time. The mechanism includes optimizations such as multiple export threads and Aurora MySQL parallel query to take advantage of the Aurora shared storage architecture. The optimizations are applied adaptively, depending on the data set size and structure.

You don't need to turn on parallel query to use the faster export process, but the process does have the same limitations as parallel query. In addition, some data values aren't supported, such as dates where the day of the month is `0` or the year is `0000`. For more information, see Parallel query for Amazon Aurora MySQL.

When performance optimizations are applied, you might also see much larger (~200 GB) Parquet files for Aurora MySQL version 2 and 3 exports.

If the faster export process can't be used, for example because of incompatible data types or values, Aurora automatically switches to a single-threaded export mode without parallel query. Depending on which process is used, and the amount of data to be exported, export performance can vary.

Troubleshooting snapshot exports

Use the following sections to help troubleshoot failure messages and PostgreSQL permission errors for DB cluster export tasks to Amazon S3.

Failure messages for Amazon S3 export tasks

The following table describes the messages that are returned when Amazon S3 export tasks fail.

Failure message	Description
An unknown internal error occurred.	The task has failed because of an unknown error, exception, or failure.
An unknown internal error occurred writing the export task's metadata to the S3 bucket [bucket name].	The task has failed because of an unknown error, exception, or failure.
The RDS export failed to write the export task's metadata because it can't assume the IAM role [role ARN].	The export task assumes your IAM role to validate whether it is allowed to write metadata to your S3 bucket. If the task can't assume your IAM role, it fails.
The RDS export failed to write the export task's metadata to the S3 bucket [bucket name] using the IAM role [role ARN] with the KMS key [key ID]. Error code: [error code]	One or more permissions are missing, so the export task can't access the S3 bucket. This failure message is raised when receiving one of the following error codes: • `AWSSecurityTokenServiceException` with the error code `AccessDenied` • `AmazonS3Exception` with the error code `NoSuchBucket`, `AccessDenied`, `KMS.KMSInvalidStateException`, `403 Forbidden`, or `KMS.DisabledException` These error codes indicate that settings are misconfigured for the IAM role, S3 bucket, or KMS key.
The IAM role [role ARN] isn't authorized to call [S3 action] on the S3 bucket [bucket name]. Review your permissions and retry the export.	The IAM policy is misconfigured. Permission for the specific S3 action on the S3 bucket is missing, which causes the export task to fail.
KMS key check failed. Check the credentials on your KMS key and try again.	The KMS key credential check failed.

Failure message	Description
S3 credential check failed. Check the permissions on your S3 bucket and IAM policy.	The S3 credential check failed.
The S3 bucket [bucket name] isn't valid. Either it isn't located in the current Amazon Web Services Region or it doesn't exist. Review your S3 bucket name and retry the export.	The S3 bucket is invalid.
The S3 bucket [bucket name] isn't located in the current Amazon Web Services Region. Review your S3 bucket name and retry the export.	The S3 bucket is in the wrong Amazon Web Services Region.

Troubleshooting PostgreSQL permissions errors

When exporting PostgreSQL databases to Amazon S3, you might see a `PERMISSIONS_DO_NOT_EXIST` error stating that certain tables were skipped. This error usually occurs when the superuser, which you specified when creating the DB instance, doesn't have permissions to access those tables.

To fix this error, run the following command:

```
GRANT ALL PRIVILEGES ON ALL TABLES IN SCHEMA schema_name TO superuser_name
```

For more information on superuser privileges, see Master user account privileges.

Restoring a DB cluster to a specified time

You can restore a DB cluster to a specific point in time, creating a new DB cluster.

When you restore a DB cluster to a point in time, you can choose the default virtual private cloud (VPC) security group. Or you can apply a custom VPC security group to your DB cluster.

Restored DB clusters are automatically associated with the default DB cluster and DB parameter groups. However, you can apply custom parameter groups by specifying them during a restore.

Amazon Aurora uploads log records for DB clusters to Amazon S3 continuously. To see the latest restorable time for a DB cluster, use the Amazon CLI describe-db-clusters command and look at the value returned in the `LatestRestorableTime` field for the DB cluster.

You can restore to any point in time within your backup retention period. To see the earliest restorable time for a DB cluster, use the Amazon CLI describe-db-clusters command and look at the value returned in the `EarliestRestorableTime` field for the DB cluster.

The backup retention period of the restored DB cluster is the same as that of the source DB cluster.

> **Note**
>
> Information in this topic applies to Amazon Aurora. For information on restoring an Amazon RDS DB instance, see Restoring a DB instance to a specified time.
> For more information about backing up and restoring an Aurora DB cluster, see Overview of backing up and restoring an Aurora DB cluster.
> You can also use Amazon Backup to manage backups of Amazon Aurora DB clusters. If your DB cluster is associated with a backup plan in Amazon Backup, that backup plan is used for point-in-time recovery. For information, see Restoring a DB cluster to a specified time using Amazon Backup.

For information about restoring an Aurora DB cluster or a global cluster with an RDS Extended Support version, see Restoring an Aurora DB cluster or a global cluster with Amazon RDS Extended Support.

Restore a DB cluster to a specified time from an automated backup, a retained automated backup, or using Amazon Backup.

Topics

- Restoring a DB cluster to a point in time
- Restoring a DB cluster to a specified time from a retained automated backup
- Restoring a DB cluster to a specified time using Amazon Backup

Restoring a DB cluster to a point in time

You can restore a DB cluster to a point in time using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To restore a DB cluster to a specified time

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Automated backups**.

   The automated backups are displayed on the **Current Region** tab.



3. Choose the DB cluster that you want to restore.
4. For **Actions**, choose **Restore to point in time**.

   The **Restore to point in time** window appears.
5. Choose **Latest restorable time** to restore to the latest possible time, or choose **Custom** to choose a time.

   If you chose **Custom**, enter the date and time to which you want to restore the cluster.

> **Note**
>
> Times are shown in your local time zone, which is indicated by an offset from Coordinated Universal Time (UTC). For example, UTC-5 is Eastern Standard Time/ Central Daylight Time.

6. For **DB cluster identifier**, enter the name of the target restored DB cluster. The name must be unique.
7. Choose other options as needed, such as the DB instance class and DB cluster storage configuration.

   For information about each setting, see Settings for Aurora DB clusters.
8. Choose **Restore to point in time**.

Amazon CLI

To restore a DB cluster to a specified time, use the Amazon CLI command restore-db-cluster-to-point-in-time to create a new DB cluster.

You can specify other settings. For information about each setting, see Settings for Aurora DB clusters.

If tags are provided in the request then the provided tags are applied to the restored DB cluster. If tags are not provided in the request and if the source DB cluster is in-region active and has tags, Aurora adds the latest tags from the source DB cluster to the restored DB cluster.

Example

For Linux, macOS, or Unix:

```
aws rds restore-db-cluster-to-point-in-time \
       --source-db-cluster-identifier mysourcedbcluster \
       --db-cluster-identifier mytargetdbcluster \
       --restore-to-time 2017-10-14T23:45:00.000Z
```

For Windows:

```
aws rds restore-db-cluster-to-point-in-time ^
```

```
    --source-db-cluster-identifier mysourcedbcluster ^
    --db-cluster-identifier mytargetdbcluster ^
    --restore-to-time 2017-10-14T23:45:00.000Z
```

Important

If you use the console to restore a DB cluster to a specified time, then Amazon RDS automatically creates the primary instance (writer) for your DB cluster. If you use the Amazon CLI to restore a DB cluster to a specified time, you must explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster.

To create the primary instance for your DB cluster, call the create-db-instance Amazon CLI command. Include the name of the DB cluster as the `--db-cluster-identifier` option value.

RDS API

To restore a DB cluster to a specified time, call the Amazon RDS API `RestoreDBClusterToPointInTime` operation with the following parameters:

- `SourceDBClusterIdentifier`
- `DBClusterIdentifier`
- `RestoreToTime`

Important

If you use the console to restore a DB cluster to a specified time, then Amazon RDS automatically creates the primary instance (writer) for your DB cluster. If you use the RDS API to restore a DB cluster to a specified time, make sure to explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster.

To create the primary instance for your DB cluster, call the RDS API operation CreateDBInstance. Include the name of the DB cluster as the `DBClusterIdentifier` parameter value.

Restoring a DB cluster to a specified time from a retained automated backup

You can restore a DB cluster from a retained automated backup after you delete the source DB cluster, if the backup is within the retention period of the source cluster. The process is similar to restoring a DB cluster from an automated backup.

Console

To restore a DB cluster to a specified time

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Automated backups**.
3. Choose the **Retained** tab.



4. Choose the DB cluster that you want to restore.
5. For **Actions**, choose **Restore to point in time**.

   The **Restore to point in time** window appears.
6. Choose **Latest restorable time** to restore to the latest possible time, or choose **Custom** to choose a time.

   If you chose **Custom**, enter the date and time to which you want to restore the cluster.

   > **Note**
   >
   > Times are shown in your local time zone, which is indicated by an offset from Coordinated Universal Time (UTC). For example, UTC-5 is Eastern Standard Time/ Central Daylight Time.

7. For **DB cluster identifier**, enter the name of the target restored DB cluster. The name must be unique.

8. Choose other options as needed, such as DB instance class.

   For information about each setting, see Settings for Aurora DB clusters.

9. Choose **Restore to point in time**.

Amazon CLI

To restore a DB cluster to a specified time, use the Amazon CLI command restore-db-cluster-to-point-in-time to create a new DB cluster.

You can specify other settings. For information about each setting, see Settings for Aurora DB clusters.

Resource tagging is supported for this operation. When you use the `--tags` option, the source DB cluster tags are ignored and the provided ones are used. Otherwise, the latest tags from the source cluster are used.

Example

For Linux, macOS, or Unix:

```
aws rds restore-db-cluster-to-point-in-time \
    --source-db-cluster-resource-id cluster-123ABCEXAMPLE \
    --db-cluster-identifier mytargetdbcluster \
    --restore-to-time 2017-10-14T23:45:00.000Z
```

For Windows:

```
aws rds restore-db-cluster-to-point-in-time ^
    --source-db-cluster-resource-id cluster-123ABCEXAMPLE ^
    --db-cluster-identifier mytargetdbcluster ^
    --restore-to-time 2017-10-14T23:45:00.000Z
```

Important

If you use the console to restore a DB cluster to a specified time, then Amazon RDS automatically creates the primary instance (writer) for your DB cluster. If you use the Amazon CLI to restore a DB cluster to a specified time, you must explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster.

To create the primary instance for your DB cluster, call the create-db-instance Amazon CLI command. Include the name of the DB cluster as the `--db-cluster-identifier` option value.

RDS API

To restore a DB cluster to a specified time, call the Amazon RDS API `RestoreDBClusterToPointInTime` operation with the following parameters:

- `SourceDbClusterResourceId`
- `DBClusterIdentifier`
- `RestoreToTime`

Important

If you use the console to restore a DB cluster to a specified time, then Amazon RDS automatically creates the primary instance (writer) for your DB cluster. If you use the RDS API to restore a DB cluster to a specified time, make sure to explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster.
To create the primary instance for your DB cluster, call the RDS API operation CreateDBInstance. Include the name of the DB cluster as the `DBClusterIdentifier` parameter value.

Restoring a DB cluster to a specified time using Amazon Backup

You can use Amazon Backup to manage your automated backups, and then to restore them to a specified time. To do this, you create a backup plan in Amazon Backup and assign your DB cluster as a resource. Then you enable continuous backups for PITR in the backup rule. For more information on backup plans and backup rules, see the *Amazon Backup Developer Guide*.


Enabling continuous backups in Amazon Backup

You enable continuous backups in backup rules.

To enable continuous backups for PITR

1. Sign in to the Amazon Web Services Management Console, and open the Amazon Backup console at https://console.amazonaws.cn/backup.
2. In the navigation pane, choose **Backup plans**.
3. Under **Backup plan name**, select the backup plan that you use to back up your DB cluster.
4. Under the **Backup rules** section, choose **Add backup rule**.

   The **Add backup rule** page displays.
5. Select the **Enable continuous backups for point-in-time recovery (PITR)** check box.

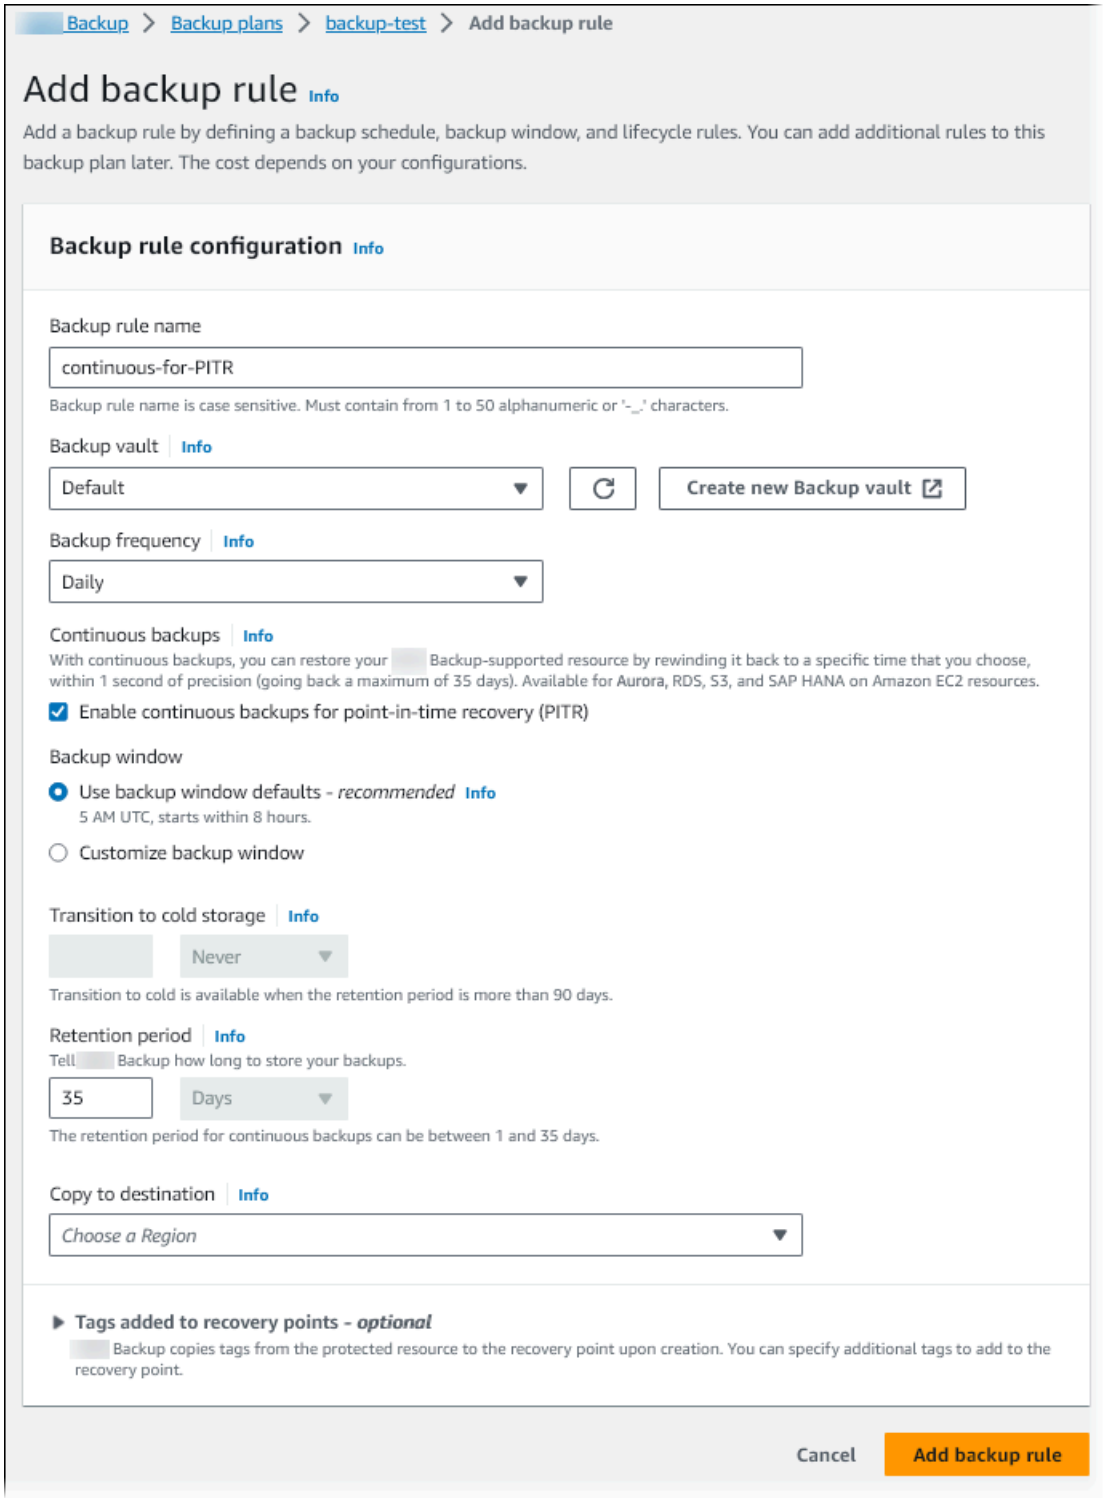

6. Choose other settings as needed, then choose **Add backup rule**.

Restoring from a continuous backup in Amazon Backup

You restore to a specified time from a backup vault.

Console

You can use the Amazon Web Services Management Console to restore a DB cluster to a specified time.


To restore from a continuous backup in Amazon Backup

1. Sign in to the Amazon Web Services Management Console, and open the Amazon Backup console at https://console.amazonaws.cn/backup.
2. In the navigation pane, choose **Backup vaults**.
3. Choose the backup vault that contains your continuous backup, for example **Default**.

   The backup vault detail page displays.
4. Under **Recovery points**, select the recovery point for the automated backup.

   It has a backup type of **Continuous** and a name with `continuous:cluster-`*`AWS-Backup-job-number`*.
5. For **Actions**, choose **Restore**.

   The **Restore backup** page displays.

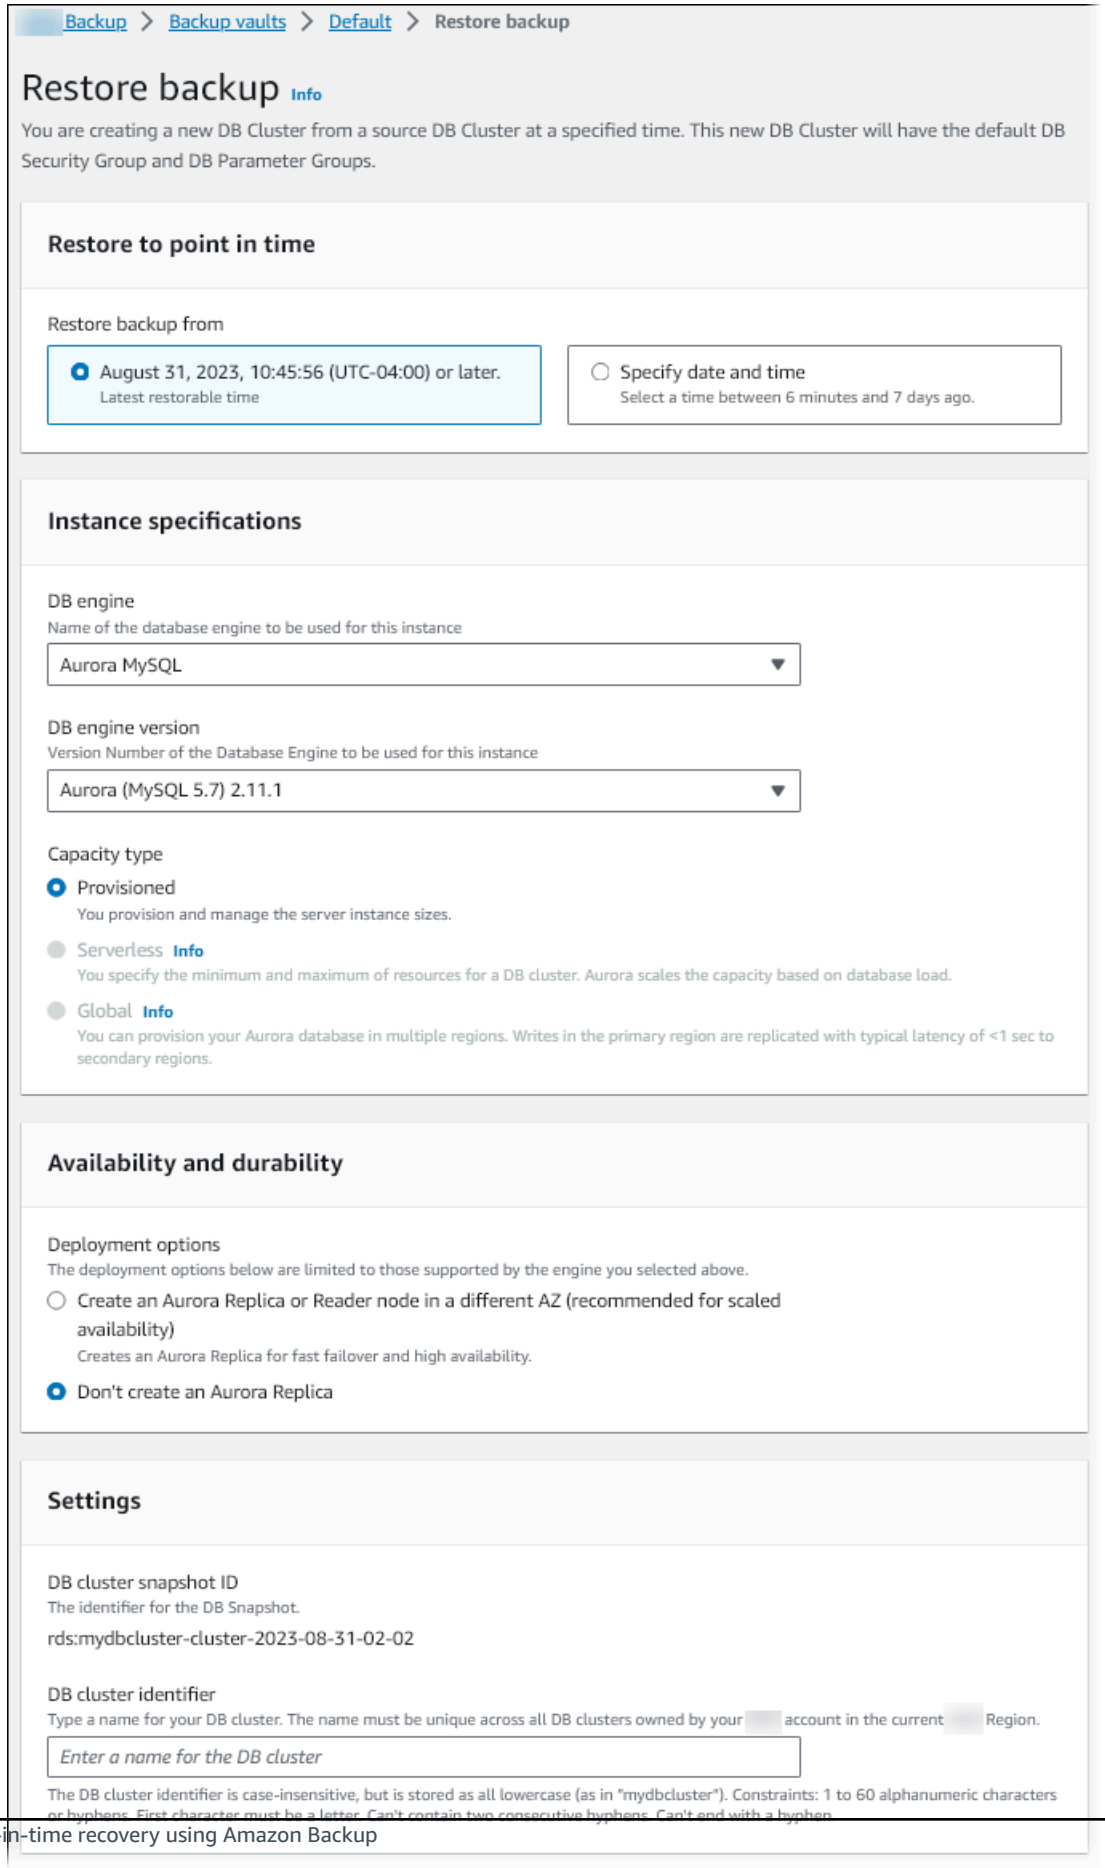
Backup > Backup vaults > Default > Restore backup
Restore backup Info
You are creating a new DB Cluster from a source DB Cluster at a specified time. This new DB Cluster will have the default DB Security Group and DB Parameter Groups.
Restore to point in time
Restore backup from
August 31, 2023, 10:45:56 (UTC-04:00) or later.
Latest restorable time
Specify date and time
Select a time between 6 minutes and 7 days ago.
Instance specifications
DB engine
Name of the database engine to be used for this instance
Aurora MySQL
DB engine version
Version Number of the Database Engine to be used for this instance
Aurora (MySQL 5.7) 2.11.1
Capacity type
Provisioned
You provision and manage the server instance sizes.
Serverless Info
You specify the minimum and maximum of resources for a DB cluster. Aurora scales the capacity based on database load.
Global Info
You can provision your Aurora database in multiple regions. Writes in the primary region are replicated with typical latency of <1 sec to secondary regions.
Availability and durability
Deployment options
The deployment options below are limited to those supported by the engine you selected above.
Create an Aurora Replica or Reader node in a different AZ (recommended for scaled availability)
Creates an Aurora Replica for fast failover and high availability.
Don't create an Aurora Replica
Settings
DB cluster snapshot ID
The identifier for the DB Snapshot.
rds:mydbcluster-cluster-2023-08-31-02-02
DB cluster identifier
Type a name for your DB cluster. The name must be unique across all DB clusters owned by your account in the current Region.
Enter a name for the DB cluster
The DB cluster identifier is case-insensitive, but is stored as all lowercase (as in "mydbcluster"). Constraints: 1 to 60 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

6. For **Restore to point in time**, select **Specify date and time** to restore to a specific point in time.
7. Choose other settings as needed for restoring the DB cluster, then choose **Restore backup**.

   The **Jobs** page displays, showing the **Restore jobs** pane. A banner provides information about the restore job.

After the DB cluster is restored, you must add the primary (writer) DB instance to it. To create the primary instance for your DB cluster, call the create-db-instance Amazon CLI command. Include the name of the DB cluster as the `--db-cluster-identifier` parameter value.

CLI

You use the start-restore-job Amazon CLI command to restore the DB cluster to a specified time. The following parameters are required:

- `--recovery-point-arn` – The Amazon Resource Name (ARN) for the recovery point from which to restore.
- `--resource-type` – Use `Aurora`.
- `--iam-role-arn` – The ARN for the IAM role that you use for Amazon Backup operations.
- `--metadata` – The metadata that you use to restore the DB cluster. The following parameters are required:
  - `DBClusterIdentifier`
  - `Engine`
  - `RestoreToTime` or `UseLatestRestorableTime`

The following example shows how to restore a DB cluster to a specified time.

```
aws backup start-restore-job \
--recovery-point-arn arn:aws:backup:eu-central-1:123456789012:recovery-
point:continuous:cluster-itsreallyjustanexample1234567890-487278c2 \
--resource-type Aurora \
--iam-role-arn arn:aws:iam::123456789012:role/service-role/AWSBackupDefaultServiceRole
 \
--metadata '{"DBClusterIdentifier":"backup-pitr-test","Engine":"aurora-
mysql","RestoreToTime":"2023-09-01T17:00:00.000Z"}'
```

The following example shows how to restore a DB cluster to the latest restorable time.

```
aws backup start-restore-job \
--recovery-point-arn arn:aws:backup:eu-central-1:123456789012:recovery-
point:continuous:cluster-itsreallyjustanexample1234567890-487278c2 \
--resource-type Aurora \
--iam-role-arn arn:aws:iam::123456789012:role/service-role/AWSBackupDefaultServiceRole
 \
--metadata '{"DBClusterIdentifier":"backup-pitr-latest","Engine":"aurora-
mysql","UseLatestRestorableTime":"true"}'
```

After the DB cluster is restored, you must add the primary (writer) DB instance to it. To create the primary instance for your DB cluster, call the create-db-instance Amazon CLI command. Include the name of the DB cluster as the `--db-cluster-identifier` parameter value.

Deleting a DB cluster snapshot

You can delete DB cluster snapshots managed by Amazon RDS when you no longer need them.

> **Note**
>
> To delete backups managed by Amazon Backup, use the Amazon Backup console. For information about Amazon Backup, see the *Amazon Backup Developer Guide*.

Deleting a DB cluster snapshot

You can delete a DB cluster snapshot using the console, the Amazon CLI, or the RDS API.

To delete a shared or public snapshot, you must sign in to the Amazon account that owns the snapshot.

Console

To delete a DB cluster snapshot

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Snapshots**.
3. Choose the DB cluster snapshot that you want to delete.
4. For **Actions**, choose **Delete snapshot**.
5. Choose **Delete** on the confirmation page.

Amazon CLI

You can delete a DB cluster snapshot by using the Amazon CLI command delete-db-cluster-snapshot.

The following options are used to delete a DB cluster snapshot.

- `--db-cluster-snapshot-identifier` – The identifier for the DB cluster snapshot.

Example

The following code deletes the `mydbclustersnapshot` DB cluster snapshot.

For Linux, macOS, or Unix:

```
aws rds delete-db-cluster-snapshot \
    --db-cluster-snapshot-identifier mydbclustersnapshot
```

For Windows:

```
aws rds delete-db-cluster-snapshot ^
    --db-cluster-snapshot-identifier mydbclustersnapshot
```

RDS API

You can delete a DB cluster snapshot by using the Amazon RDS API operation DeleteDBClusterSnapshot.

The following parameters are used to delete a DB cluster snapshot.

- `DBClusterSnapshotIdentifier` – The identifier for the DB cluster snapshot.

Tutorial: Restore an Amazon Aurora DB cluster from a DB cluster snapshot

A common scenario when working with Amazon Aurora is to have a DB instance that you work with occasionally but that you don't need full time. For example, you might use a DB cluster to hold the data for a report that you run only quarterly. One way to save money on such a scenario is to take a DB cluster snapshot of the DB cluster after the report is completed. Then you delete the DB cluster, and restore it when you need to upload new data and run the report during the next quarter.

When you restore a DB cluster, you provide the name of the DB cluster snapshot to restore from. You then provide a name for the new DB cluster that's created from the restore operation. For more detailed information on restoring DB clusters from snapshots, see Restoring from a DB cluster snapshot.

In this tutorial, we also upgrade the restored DB cluster from Aurora MySQL version 2 (compatible with MySQL 5.7) to Aurora MySQL version 3 (compatible with MySQL 8.0).

Restore a DB cluster to a specified time from a DB cluster snapshot using the Amazon RDS console or the Amazon CLI.

For information about Amazon KMS key management for Amazon RDS, see Amazon KMS key management.

Topics

- Tutorial: Restoring a DB cluster from a DB cluster snapshot using the Amazon RDS console
- Tutorial: Restoring a DB cluster from a DB cluster snapshot using the Amazon CLI


Tutorial: Restoring a DB cluster from a DB cluster snapshot using the Amazon RDS console

In this tutorial, you restore a DB cluster from a DB cluster snapshot using the Amazon RDS console. When you restore a DB cluster from a snapshot using the Amazon Web Services Management Console, the primary (writer) DB instance is also created.

> **Note**
>
> While the primary DB instance is being created, it appears as a reader instance, but after creation it's a writer instance.

To restore a DB cluster from a DB cluster snapshot


1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Snapshots**.
3. Choose the DB cluster snapshot that you want to restore from.
4. For **Actions**, choose **Restore snapshot**.

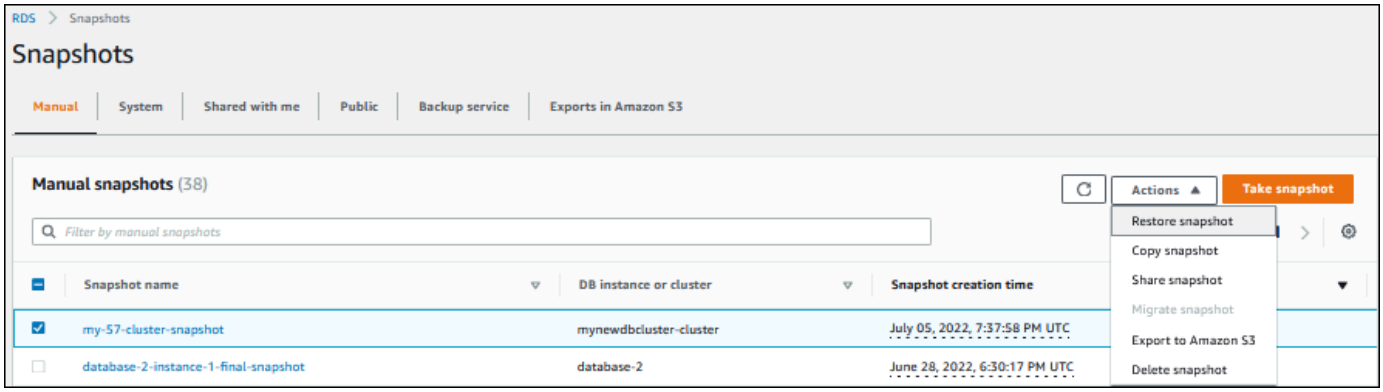

   The **Restore snapshot** page appears.
5. Under **DB instance settings**, do the following:

   a. Use the default setting for **DB engine**.

   b. For **Available versions**, choose a MySQL–8.0 compatible version, such as **Aurora MySQL 3.04.0 (compatible with MySQL 8.0.28)**.

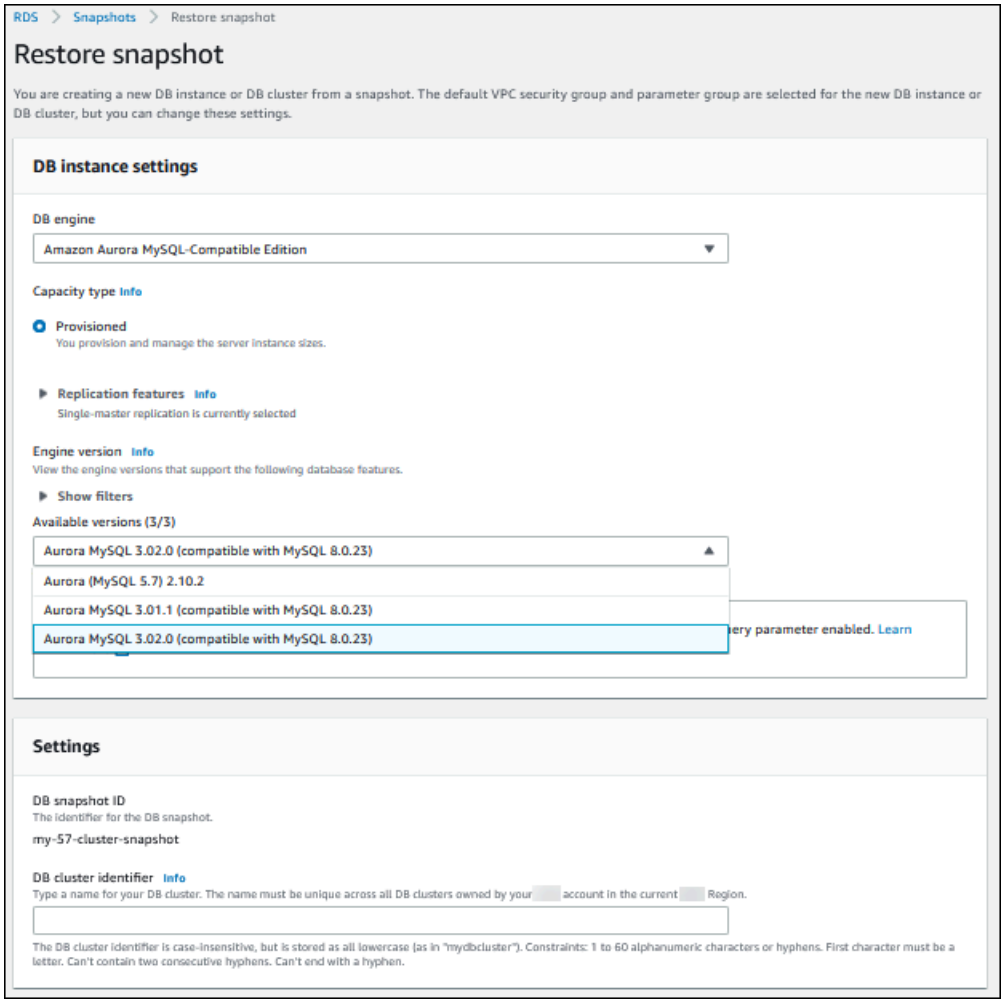

6. Under **Settings**, for **DB instance identifier** enter the unique name that you want to use for the restored DB instance, for example **`my-80`**.

> **Note**
>
> To create the DB cluster identifier, Amazon RDS appends `-cluster` to the DB instance identifier you specify.


7. Under **Connectivity**, use the default settings for the following:

   - **Virtual private cloud (VPC)**
   - **DB subnet group**
   - **Public access**
   - **VPC security group (firewall)**

8. Choose the **DB instance class**.


   For this tutorial, choose **Burstable classes (includes t classes)**, and then choose **db.t3.medium**.

   > **Note**
   >
   > We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see DB instance class types.

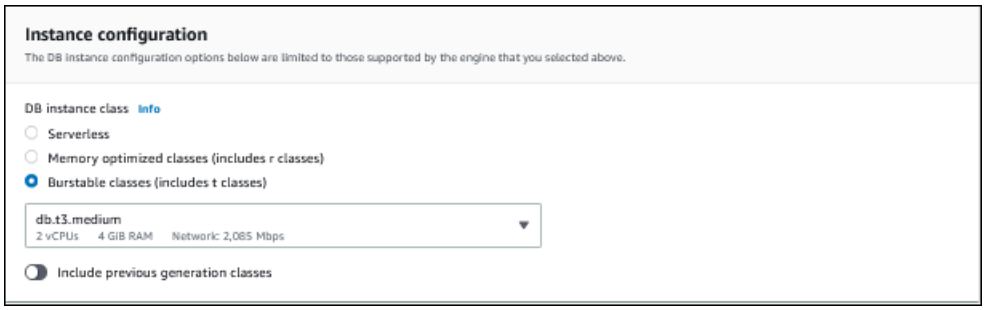

9. For **Database authentication**, use the default setting.
10. For **Encryption**, use the default settings.

    If the source DB cluster for the snapshot was encrypted, the restored DB cluster is also encrypted. You can't make it unencrypted.
11. Expand **Additional configuration**.

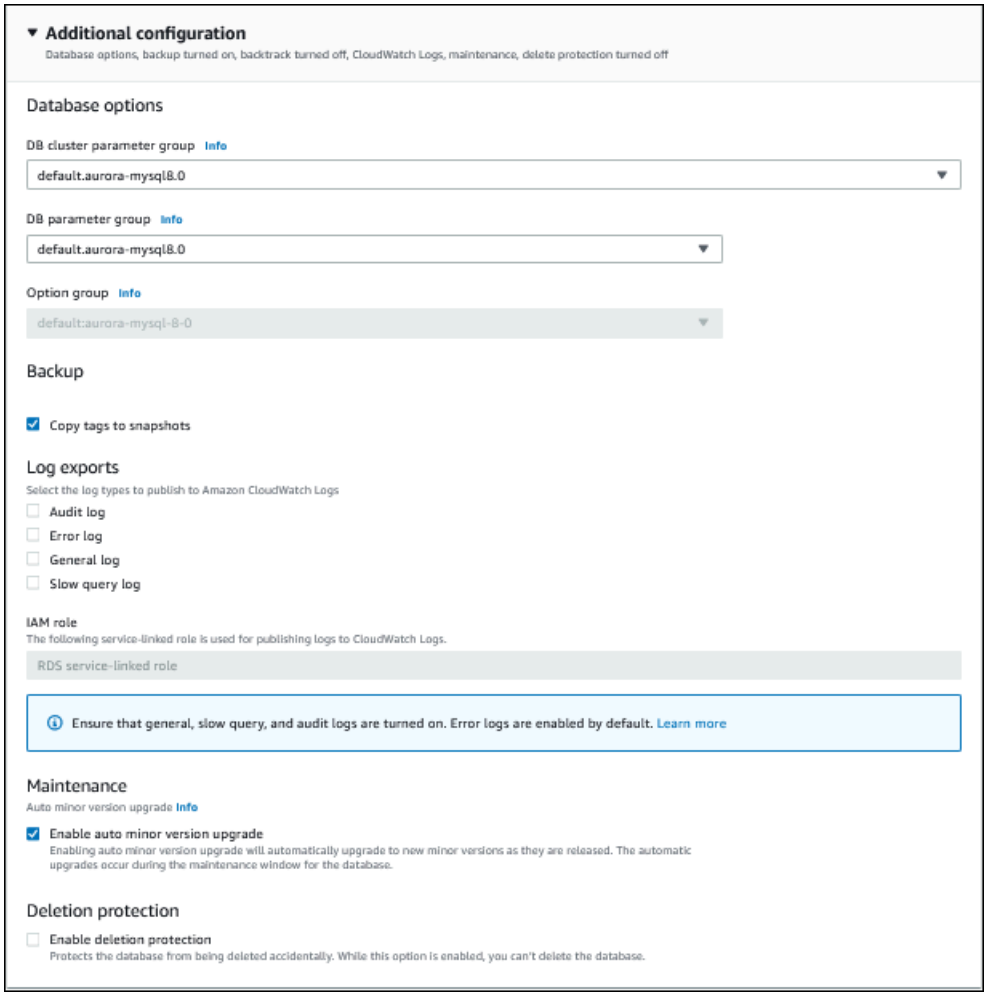

12. Make the following choices:

    a. For this tutorial, use the default value for **DB cluster parameter group**.


    b. For this tutorial, use the default value for **DB parameter group**.

    c. For **Log exports**, select all of the check boxes.

    d. For **Deletion protection**, select the **Enable deletion protection** check box.

13. Choose **Restore DB instance**.

The **Databases** page displays the restored DB cluster, with a status of `Creating`.

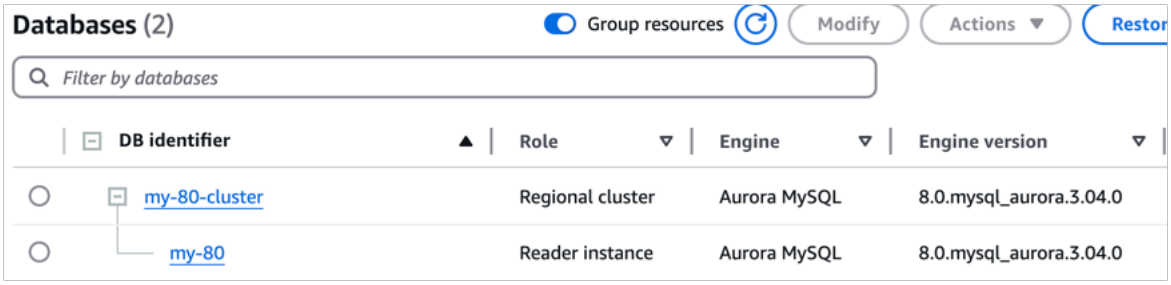

While the primary DB instance is being created, it appears as a reader instance, but after creation it's a writer instance.

Tutorial: Restoring a DB cluster from a DB cluster snapshot using the Amazon CLI

In this tutorial, you restore a DB cluster from a DB cluster snapshot using the Amazon CLI. Restoring a DB cluster from a snapshot using the Amazon CLI has two steps:

1. Restoring the DB cluster using the restore-db-cluster-from-snapshot command
2. Creating the primary (writer) DB instance using the create-db-instance command

Restoring the DB cluster

You use the `restore-db-cluster-from-snapshot` command. The following options are required:

- `--db-cluster-identifier` – The name of the restored DB cluster.
- `--snapshot-identifier` – The name of the DB snapshot to restore from.
- `--engine` – The database engine of the restored DB cluster. It must be compatible with the database engine of the source DB cluster.

  The choices are the following:

  - `aurora-mysql` – Aurora MySQL 5.7 and 8.0 compatible.
  - `aurora-postgresql` – Aurora PostgreSQL compatible.

  In this example, we use `aurora-mysql`.
- `--engine-version` – The version of the restored DB cluster. In this example, we use a MySQL-8.0 compatible version.

The following example restores an Aurora MySQL 8.0–compatible DB cluster named `my-new-80-cluster` from a DB cluster snapshot named `my-57-cluster-snapshot`.

To restore the DB cluster

- Use one of the following commands.

  For Linux, macOS, or Unix:

```
aws rds restore-db-cluster-from-snapshot \
    --db-cluster-identifier my-new-80-cluster \
    --snapshot-identifier my-57-cluster-snapshot \
    --engine aurora-mysql \
    --engine-version 8.0.mysql_aurora.3.02.0
```

  For Windows:

```
aws rds restore-db-cluster-from-snapshot ^
    --db-cluster-identifier my-new-80-cluster ^
    --snapshot-identifier my-57-cluster-snapshot ^
    --engine aurora-mysql ^
    --engine-version 8.0.mysql_aurora.3.02.0
```

The output resembles the following.

```
{
    "DBCluster": {
        "AllocatedStorage": 1,
        "AvailabilityZones": [
            "eu-central-1b",
            "eu-central-1c",
            "eu-central-1a"
        ],
        "BackupRetentionPeriod": 14,
        "DatabaseName": "",
        "DBClusterIdentifier": "my-new-80-cluster",
        "DBClusterParameterGroup": "default.aurora-mysql8.0",
        "DBSubnetGroup": "default",
        "Status": "creating",
        "Endpoint": "my-new-80-cluster.cluster-############.eu-
central-1.rds.amazonaws.com",
```

```
        "ReaderEndpoint": "my-new-80-cluster.cluster-ro-############.eu-
central-1.rds.amazonaws.com",
        "MultiAZ": false,
        "Engine": "aurora-mysql",
        "EngineVersion": "8.0.mysql_aurora.3.02.0",
        "Port": 3306,
        "MasterUsername": "admin",
        "PreferredBackupWindow": "01:55-02:25",
        "PreferredMaintenanceWindow": "thu:21:14-thu:21:44",
        "ReadReplicaIdentifiers": [],
        "DBClusterMembers": [],
        "VpcSecurityGroups": [
            {
                "VpcSecurityGroupId": "sg-########",
                "Status": "active"
            }
        ],
        "HostedZoneId": "Z1RLNU0EXAMPLE",
        "StorageEncrypted": true,
        "KmsKeyId": "arn:aws:kms:eu-central-1:123456789012:key/#######-5ccc-49cc-8aaa-
############",
        "DbClusterResourceId": "cluster-ZZ12345678ITSJUSTANEXAMPLE",
        "DBClusterArn": "arn:aws:rds:eu-central-1:123456789012:cluster:my-new-80-
cluster",
        "AssociatedRoles": [],
        "IAMDatabaseAuthenticationEnabled": false,
        "ClusterCreateTime": "2022-07-05T20:45:42.171000+00:00",
        "EngineMode": "provisioned",
        "DeletionProtection": false,
        "HttpEndpointEnabled": false,
        "CopyTagsToSnapshot": false,
        "CrossAccountClone": false,
        "DomainMemberships": [],
        "TagList": []
    }
}
```

Creating the primary (writer) DB instance

To create the primary (writer) DB instance, you use the `create-db-instance` command. The following options are required:

- `--db-cluster-identifier` – The name of the restored DB cluster.

- `--db-instance-identifier` – The name of the primary DB instance.
- `--db-instance-class` – The instance class of the primary DB instance. In this example, we use `db.t3.medium`.

> **Note**
>
> We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see DB instance class types.

- `--engine` – The database engine of the primary DB instance. It must be the same database engine as the restored DB cluster uses.

  The choices are the following:

  - `aurora-mysql` – Aurora MySQL 5.7 and 8.0 compatible.
  - `aurora-postgresql` – Aurora PostgreSQL compatible.

  In this example, we use `aurora-mysql`.

The following example creates a primary (writer) DB instance named `my-new-80-cluster-instance` in the restored Aurora MySQL 8.0–compatible DB cluster named `my-new-80-cluster`.

To create the primary DB instance

- Use one of the following commands.

  For Linux, macOS, or Unix:

```
aws rds create-db-instance \
    --db-cluster-identifier my-new-80-cluster \
    --db-instance-identifier my-new-80-cluster-instance \
    --db-instance-class db.t3.medium \
    --engine aurora-mysql
```

  For Windows:

```
aws rds create-db-instance ^
    --db-cluster-identifier my-new-80-cluster ^
    --db-instance-identifier my-new-80-cluster-instance ^
```

```
    --db-instance-class db.t3.medium ^
    --engine aurora-mysql
```

The output resembles the following.

```
{
    "DBInstance": {
        "DBInstanceIdentifier": "my-new-80-cluster-instance",
        "DBInstanceClass": "db.t3.medium",
        "Engine": "aurora-mysql",
        "DBInstanceStatus": "creating",
        "MasterUsername": "admin",
        "AllocatedStorage": 1,
        "PreferredBackupWindow": "01:55-02:25",
        "BackupRetentionPeriod": 14,
        "DBSecurityGroups": [],
        "VpcSecurityGroups": [
            {
                "VpcSecurityGroupId": "sg-########",
                "Status": "active"
            }
        ],
        "DBParameterGroups": [
            {
                "DBParameterGroupName": "default.aurora-mysql8.0",
                "ParameterApplyStatus": "in-sync"
            }
        ],
        "DBSubnetGroup": {
            "DBSubnetGroupName": "default",
            "DBSubnetGroupDescription": "default",
            "VpcId": "vpc-2305ca49",
            "SubnetGroupStatus": "Complete",
            "Subnets": [
                {
                    "SubnetIdentifier": "subnet-########",
                    "SubnetAvailabilityZone": {
                        "Name": "eu-central-1a"
                    },
                    "SubnetOutpost": {},
                    "SubnetStatus": "Active"
                },
```

```
                {
                    "SubnetIdentifier": "subnet-########",
                    "SubnetAvailabilityZone": {
                        "Name": "eu-central-1b"
                    },
                    "SubnetOutpost": {},
                    "SubnetStatus": "Active"
                },
                {
                    "SubnetIdentifier": "subnet-########",
                    "SubnetAvailabilityZone": {
                        "Name": "eu-central-1c"
                    },
                    "SubnetOutpost": {},
                    "SubnetStatus": "Active"
                }
            ]
        },
        "PreferredMaintenanceWindow": "sat:02:41-sat:03:11",
        "PendingModifiedValues": {},
        "MultiAZ": false,
        "EngineVersion": "8.0.mysql_aurora.3.02.0",
        "AutoMinorVersionUpgrade": true,
        "ReadReplicaDBInstanceIdentifiers": [],
        "LicenseModel": "general-public-license",
        "OptionGroupMemberships": [
            {
                "OptionGroupName": "default:aurora-mysql-8-0",
                "Status": "in-sync"
            }
        ],
        "PubliclyAccessible": false,
        "StorageType": "aurora",
        "DbInstancePort": 0,
        "DBClusterIdentifier": "my-new-80-cluster",
        "StorageEncrypted": true,
        "KmsKeyId": "arn:aws:kms:eu-central-1:534026745191:key/#######-5ccc-49cc-8aaa-
############",
        "DbiResourceId": "db-5C6UT5PU0YETANOTHEREXAMPLE",
        "CACertificateIdentifier": "rds-ca-2019",
        "DomainMemberships": [],
        "CopyTagsToSnapshot": false,
        "MonitoringInterval": 0,
        "PromotionTier": 1,
```

```
        "DBInstanceArn": "arn:aws:rds:eu-central-1:123456789012:db:my-new-80-cluster-
instance",
        "IAMDatabaseAuthenticationEnabled": false,
        "PerformanceInsightsEnabled": false,
        "DeletionProtection": false,
        "AssociatedRoles": [],
        "TagList": []
    }
}
```

Monitoring metrics in an Amazon Aurora cluster

Amazon Aurora uses a cluster of replicated database servers. Typically, monitoring an Aurora cluster requires checking the health of multiple DB instances. The instances might have specialized roles, handling mostly write operations, only read operations, or a combination. You also monitor the overall health of the cluster by measuring the *replication lag*. This is the amount of time for changes made by one DB instance to be available to the other instances.

Topics

- Monitoring plan
- Performance baseline
- Performance guidelines
- Monitoring tools for Amazon Aurora
- Viewing cluster status
- Recommendations from Amazon Aurora
- Viewing metrics in the Amazon RDS console
- Monitoring Amazon Aurora metrics with Amazon CloudWatch
- Monitoring Amazon Aurora databases with CloudWatch Database Insights
- Analyzing Aurora performance anomalies with Amazon DevOps Guru for Amazon RDS
- Monitoring OS metrics with Enhanced Monitoring
- Metrics reference for Amazon Aurora

Monitoring plan

Before you start monitoring Amazon Aurora, create a monitoring plan. This plan should answer the following questions:

- What are your monitoring goals?
- Which resources will you monitor?
- How often will you monitor these resources?
- Which monitoring tools will you use?
- Who will perform the monitoring tasks?

- Whom should be notified when something goes wrong?

Performance baseline

To achieve your monitoring goals, you need to establish a baseline. To do this, measure performance under different load conditions at various times in your Amazon Aurora environment. You can monitor metrics such as the following:

- Network throughput
- Client connections
- I/O for read, write, or metadata operations
- Burst credit balances for your DB instances

We recommend that you store historical performance data for Amazon Aurora. Using the stored data, you can compare current performance against past trends. You can also distinguish normal performance patterns from anomalies, and devise techniques to address issues.

Performance guidelines

In general, acceptable values for performance metrics depend on what your application is doing relative to your baseline. Investigate consistent or trending variances from your baseline. The following metrics are often the source of performance issues:

- **High CPU or RAM consumption** – High values for CPU or RAM consumption might be appropriate, if they're in keeping with your goals for your application (like throughput or concurrency) and are expected.
- **Disk space consumption** – Investigate disk space consumption if space used is consistently at or above 85 percent of the total disk space. See if it is possible to delete data from the instance or archive data to a different system to free up space.
- **Network traffic** – For network traffic, talk with your system administrator to understand what expected throughput is for your domain network and internet connection. Investigate network traffic if throughput is consistently lower than expected.
- **Database connections** – If you see high numbers of user connections and also decreases in instance performance and response time, consider constraining database connections. The best number of user connections for your DB instance varies based on your instance class and

the complexity of the operations being performed. To determine the number of database connections, associate your DB instance with a parameter group where the `User Connections` parameter is set to a value other than 0 (unlimited). You can either use an existing parameter group or create a new one. For more information, see Parameter groups for Amazon Aurora.

- **IOPS metrics** – The expected values for IOPS metrics depend on disk specification and server configuration, so use your baseline to know what is typical. Investigate if values are consistently different than your baseline. For best IOPS performance, make sure that your typical working set fits into memory to minimize read and write operations.

When performance falls outside your established baseline, you might need to make changes to optimize your database availability for your workload. For example, you might need to change the instance class of your DB instance. Or you might need to change the number of DB instances and read replicas that are available for clients.

Monitoring tools for Amazon Aurora

Monitoring is an important part of maintaining the reliability, availability, and performance of Amazon Aurora and your other Amazon solutions. Amazon provides various monitoring tools to watch Amazon Aurora, report when something is wrong, and take automatic actions when appropriate.

For information about accessing the monitoring tools for your Amazon Aurora resources, see Viewing cluster status.

Topics

- Automated monitoring tools
- Manual monitoring tools

Automated monitoring tools

We recommend that you automate monitoring tasks as much as possible.

Topics

- Amazon Aurora cluster status and recommendations
- Amazon CloudWatch metrics for Amazon Aurora
- Amazon Aurora Enhanced Monitoring
- Integrated services

Amazon Aurora cluster status and recommendations

You can use the following automated tools to watch Amazon Aurora and report when something is wrong:

- **Amazon Aurora cluster status** — View details about the current status of your cluster by using the Amazon RDS console, the Amazon CLI, or the RDS API.
- **Amazon Aurora recommendations** — Respond to automated recommendations for database resources, such as DB instances, DB clusters, and DB cluster parameter groups. For more information, see Recommendations from Amazon Aurora.

Amazon CloudWatch metrics for Amazon Aurora

Amazon Aurora integrates with Amazon CloudWatch for additional monitoring capabilities.

- **Amazon CloudWatch** – This service monitors your Amazon resources and the applications you run on Amazon in real time. You can use the following Amazon CloudWatch features with Amazon Aurora:
  - **Amazon CloudWatch metrics** – Amazon Aurora automatically sends metrics to CloudWatch every minute for each active database. You don't get additional charges for Amazon RDS metrics in CloudWatch. For more information, see Amazon CloudWatch metrics for Amazon Aurora
  - **Amazon CloudWatch alarms** – You can watch a single Amazon Aurora metric over a specific time period. You can then perform one or more actions based on the value of the metric relative to a threshold that you set.
  - **Amazon CloudWatch Database Insights** – Assess the load on your database, and determine when and where to take action. For more information, see Monitoring Amazon Aurora databases with CloudWatch Database Insights.

Amazon Aurora Enhanced Monitoring

Amazon Aurora Enhanced Monitoring provides metrics in real time for the operating system. For more information, see Monitoring OS metrics with Enhanced Monitoring.

Integrated services

The following Amazon services are integrated with Amazon Aurora:

- *Amazon EventBridge* is a serverless event bus service that makes it easy to connect your applications with data from a variety of sources. For more information, see Monitoring Amazon Aurora events.
- *Amazon CloudWatch Logs* lets you monitor, store, and access your log files from Amazon Aurora instances, CloudTrail, and other sources. For more information, see Monitoring Amazon Aurora log files.
- *Amazon CloudTrail* captures API calls and related events made by or on behalf of your Amazon Web Services account and delivers the log files to an Amazon S3 bucket that you specify. For more information, see Monitoring Amazon Aurora API calls in Amazon CloudTrail.

- *Database Activity Streams* is an Amazon Aurora feature that provides a near-real-time stream of the activity in your DB cluster. For more information, see Monitoring Amazon Aurora with Database Activity Streams.
- *DevOps Guru for RDS* is a capability of Amazon DevOps Guru that applies machine learning to detailed per-query and database counter metrics for Amazon Aurora databases. For more information, see Analyzing Aurora performance anomalies with Amazon DevOps Guru for Amazon RDS.

Manual monitoring tools

You need to manually monitor those items that the CloudWatch alarms don't cover. The Amazon RDS, CloudWatch, Amazon Trusted Advisor and other Amazon console dashboards provide an at-a-glance view of the state of your Amazon environment. We recommend that you also check the log files on your DB instance.

- From the Amazon RDS console, you can monitor the following items for your resources:
  - The number of connections to a DB instance
  - The amount of read and write operations to a DB instance
  - The amount of storage that a DB instance is currently using
  - The amount of memory and CPU being used for a DB instance
  - The amount of network traffic to and from a DB instance
- From the Trusted Advisor dashboard, you can review the following cost optimization, security, fault tolerance, and performance improvement checks:
  - Amazon RDS Idle DB Instances
  - Amazon RDS Security Group Access Risk
  - Amazon RDS Backups
  - Amazon RDS Multi-AZ
  - Aurora DB Instance Accessibility

  For more information on these checks, see Trusted Advisor best practices (checks).
- CloudWatch home page shows:
  - Current alarms and status
  - Graphs of alarms and resources
  - Service health status

In addition, you can use CloudWatch to do the following:

- Create customized dashboards to monitor the services that you care about.
- Graph metric data to troubleshoot issues and discover trends.
- Search and browse all your Amazon resource metrics.
- Create and edit alarms to be notified of problems.

Viewing cluster status

Using the Amazon RDS console, you can quickly access the status of your DB cluster.

Topics

- Viewing an Amazon Aurora DB cluster
- Viewing DB cluster status
- Viewing DB instance statusin an Aurora cluster

Viewing an Amazon Aurora DB cluster

You have several options for viewing information about your Amazon Aurora DB clusters and the DB instances in your DB clusters.

- You can view DB clusters and DB instances in the Amazon RDS console by choosing **Databases** from the navigation pane.
- You can get DB cluster and DB instance information using the Amazon Command Line Interface (Amazon CLI).
- You can get DB cluster and DB instance information using the Amazon RDS API.


Console

In the Amazon RDS console, you can see details about a DB cluster by choosing **Databases** from the console's navigation pane. You can also see details about DB instances that are members of an Amazon Aurora DB cluster.

To view or modify DB clusters in the Amazon RDS console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the name of the Aurora DB cluster that you want to view from the list.

   For example, the following image shows the details page for the DB cluster named `aurora-test`. The DB cluster has four DB instances shown in the DB identifier list. The writer DB instance, `dbinstance4`, is the primary DB instance for the DB cluster.

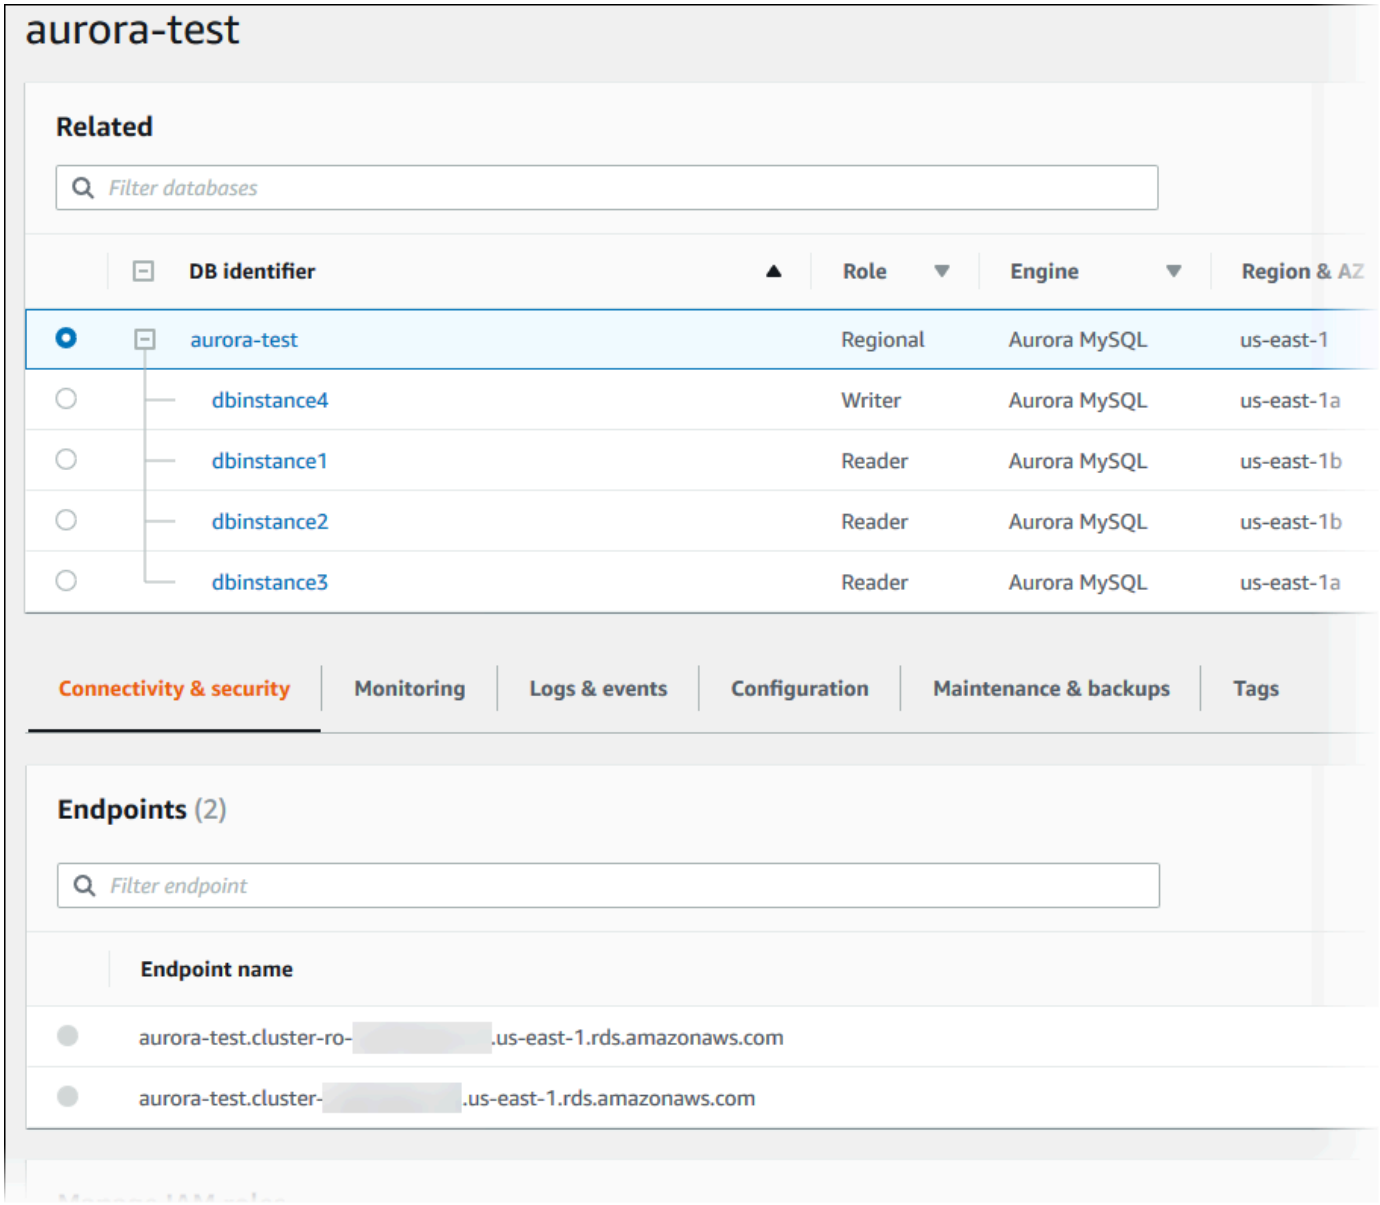


4. To modify a DB cluster, select the DB cluster from the list and choose **Modify**.

To view or modify DB instances of a DB cluster in the Amazon RDS console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Do one of the following:

   - To view a DB instance, choose one from the list that is a member of the Aurora DB cluster.

For example, if you choose the `dbinstance4` DB instance identifier, the console shows the details page for the `dbinstance4` DB instance, as shown in the following image.

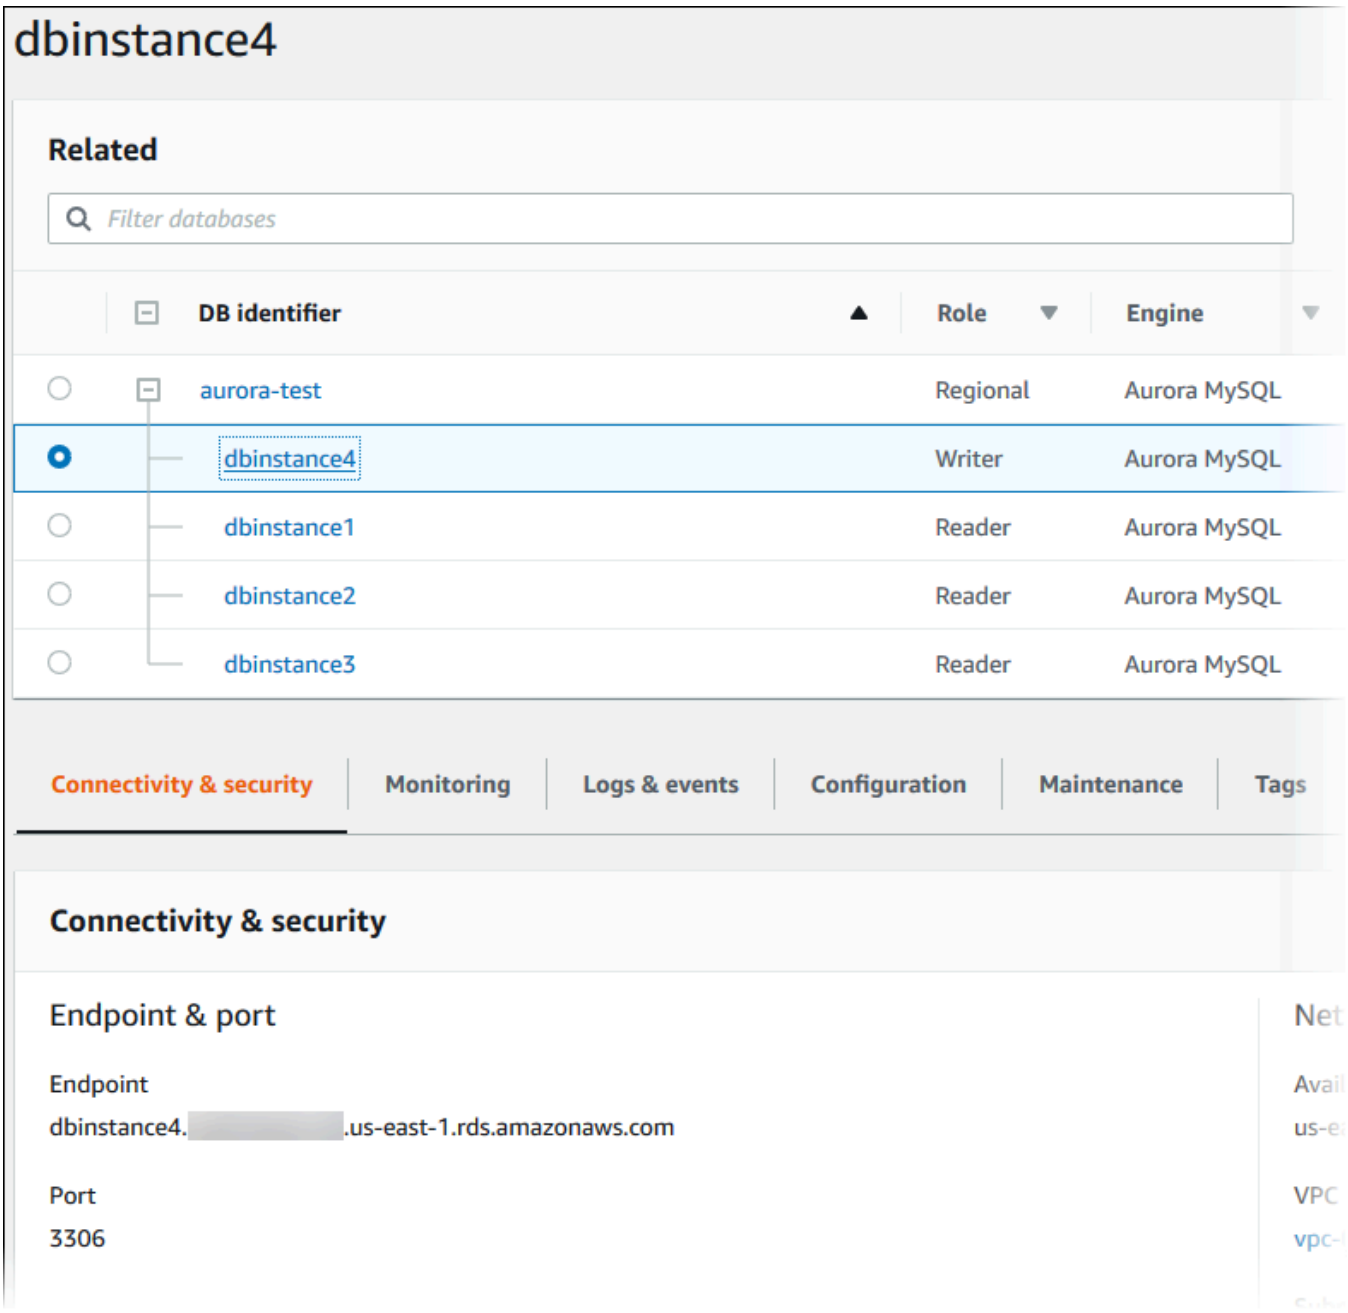

- To modify a DB instance, choose the DB instance from the list and choose **Modify**. For more information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

Amazon CLI

To view DB cluster information by using the Amazon CLI, use the describe-db-clusters command. For example, the following Amazon CLI command lists the DB cluster information for all of the DB clusters in the modify `us-east-1` region for the configured Amazon account.

```
aws rds describe-db-clusters --region us-east-1
```

The command returns the following output if your Amazon CLI is configured for JSON output.

```
{
    "DBClusters": [
        {
            "Status": "available",
            "Engine": "aurora-mysql",
            "Endpoint": "sample-cluster1.cluster-123456789012.us-
east-1.rds.amazonaws.com"
            "AllocatedStorage": 1,
            "DBClusterIdentifier": "sample-cluster1",
            "MasterUsername": "mymasteruser",
            "EarliestRestorableTime": "2023-03-30T03:35:42.563Z",
            "DBClusterMembers": [
                {
                    "IsClusterWriter": false,
                    "DBClusterParameterGroupStatus": "in-sync",
                    "DBInstanceIdentifier": "sample-replica"
                },
                {
                    "IsClusterWriter": true,
                    "DBClusterParameterGroupStatus": "in-sync",
                    "DBInstanceIdentifier": "sample-primary"
                }
            ],
            "Port": 3306,
            "PreferredBackupWindow": "03:34-04:04",
            "VpcSecurityGroups": [
                {
                    "Status": "active",
                    "VpcSecurityGroupId": "sg-ddb65fec"
                }
            ],
            "DBSubnetGroup": "default",
            "StorageEncrypted": false,
```

```
            "DatabaseName": "sample",
            "EngineVersion": "5.7.mysql_aurora.2.11.0",
            "DBClusterParameterGroup": "default.aurora-mysql5.7",
            "BackupRetentionPeriod": 1,
            "AvailabilityZones": [
                "us-east-1b",
                "us-east-1c",
                "us-east-1d"
            ],
            "LatestRestorableTime": "2023-03-31T20:06:08.903Z",
            "PreferredMaintenanceWindow": "wed:08:15-wed:08:45"
        },
        {
            "Status": "available",
            "Engine": "aurora-mysql",
            "Endpoint": "aurora-sample.cluster-123456789012.us-
east-1.rds.amazonaws.com",
            "AllocatedStorage": 1,
            "DBClusterIdentifier": "aurora-sample-cluster",
            "MasterUsername": "mymasteruser",
            "EarliestRestorableTime": "2023-03-30T10:21:34.826Z",
            "DBClusterMembers": [
                {
                    "IsClusterWriter": false,
                    "DBClusterParameterGroupStatus": "in-sync",
                    "DBInstanceIdentifier": "aurora-replica-sample"
                },
                {
                    "IsClusterWriter": true,
                    "DBClusterParameterGroupStatus": "in-sync",
                    "DBInstanceIdentifier": "aurora-sample"
                }
            ],
            "Port": 3306,
            "PreferredBackupWindow": "10:20-10:50",
            "VpcSecurityGroups": [
                {
                    "Status": "active",
                    "VpcSecurityGroupId": "sg-55da224b"
                }
            ],
            "DBSubnetGroup": "default",
            "StorageEncrypted": false,
            "DatabaseName": "sample",
```

```
            "EngineVersion": "5.7.mysql_aurora.2.11.0",
            "DBClusterParameterGroup": "default.aurora-mysql5.7",
            "BackupRetentionPeriod": 1,
            "AvailabilityZones": [
                "us-east-1b",
                "us-east-1c",
                "us-east-1d"
            ],
            "LatestRestorableTime": "2023-03-31T20:00:11.491Z",
            "PreferredMaintenanceWindow": "sun:03:53-sun:04:23"
        }
    ]
}
```

RDS API

To view DB cluster information using the Amazon RDS API, use the DescribeDBClusters operation.

Viewing DB cluster status

The status of a DB cluster indicates its current operational state. You can view the status of a DB cluster and the cluster instances by using the Amazon RDS console, the Amazon CLI, or the API.

> **Note**
>
> Aurora also uses another status called *maintenance status*, which is shown in the **Maintenance** column of the Amazon RDS console. This value indicates the status of any maintenance patches that need to be applied to a DB cluster. Maintenance status is independent of DB cluster status. For more information about maintenance status, see Applying updates to a DB cluster.

Find the possible status values for DB clusters in the following table.

DB cluster status	Billed	Description
Available	Billed	The DB cluster is available for modifications. When an Aurora Serverless cluster is available and paused, you're billed for storage only.
Backing-up	Billed	The DB cluster is currently being backed up.
Backtracking	Billed	The DB cluster is currently being backtracked. This status only applies to Aurora MySQL.
Cloning-failed	Not billed	Cloning a DB cluster failed.
Creating	Not billed	The DB cluster is being created. The DB cluster is inaccessible while it is being created.
Deleting	Not billed	The DB cluster is being deleted.
Failing-over	Billed	A failover from the primary instance to an Aurora Replica is being performed.

DB cluster status	Billed	Description
Inaccessible-encryption-credentials	Not billed	The Amazon KMS key used to encrypt or decrypt the DB cluster can't be accessed or recovered.
Inaccessible-encryption-credentials-recoverable	Billed for storage	The KMS key used to encrypt or decrypt the DB cluster can't be accessed. However, if the KMS key is active, restarting the DB cluster can recover it. For more information, see Encrypting an Amazon Aurora DB cluster.
Maintenance	Billed	Amazon RDS is applying a maintenance update to the DB cluster. This status is used for DB cluster-level maintenance that RDS schedules well in advance.
Migrating	Billed	A DB cluster snapshot is being restored to a DB cluster.
Migration-failed	Not billed	A migration failed.
Modifying	Billed	The DB cluster is being modified because of a customer request to modify the DB cluster.
Promoting	Billed	A read replica is being promoted to a standalone DB cluster.
Preparing-data-migration	Billed	Amazon RDS is preparing to migrate data to Aurora.
Renaming	Billed	The DB cluster is being renamed because of a customer request to rename it.
Resetting-master-credentials	Billed	The master credentials for the DB cluster are being reset because of a customer request to reset them.


DB cluster status	Billed	Description
Starting	Billed for storage	The DB cluster is starting.
Stopped	Billed for storage	The DB cluster is stopped.
Stopping	Billed for storage	The DB cluster is being stopped.
Storage-optimization	Billed	Your DB instance is being modified to change the storage size or type. The DB instance is fully operational. However, while the status of your DB instance is **storage-optimization**, you can't request any changes to the storage of your DB instance. The storage optimization process is usually short, but can sometimes take up to and even beyond 24 hours.
Update-iam-db-auth	Billed	IAM authorization for the DB cluster is being updated.
Upgrading	Billed	The DB cluster engine or operating system version is being upgraded.
upgrade-failed	Not billed	The DB cluster has failed to upgrade to a supported version. Aurora creates a final snapshot with the prefix `rds-final` .

Console

To view the status of a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.

   The **Databases page** appears with the list of DB clusters. For each DB cluster, the status value is displayed.

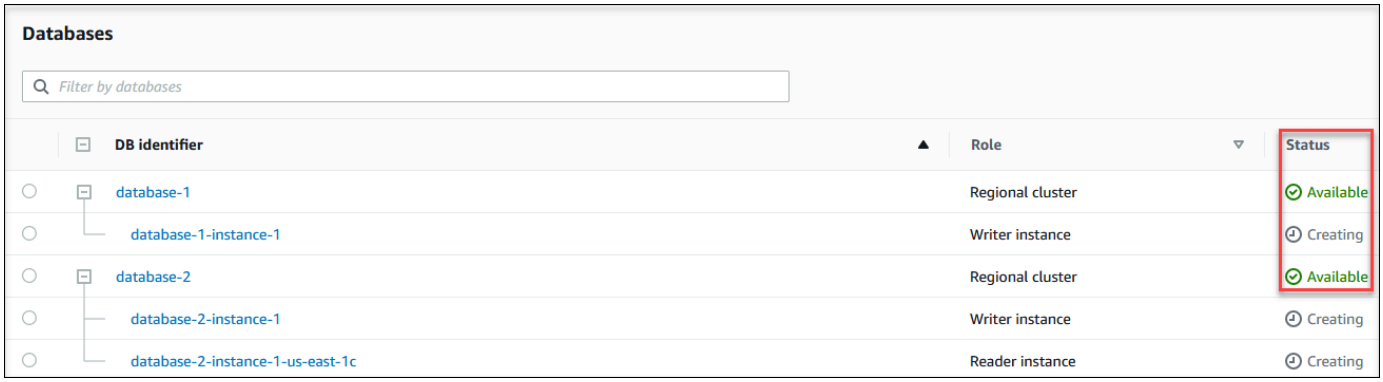

CLI

To view just the status of the DB clusters, use the following query in Amazon CLI.

```
aws rds describe-db-clusters --query 'DBClusters[*].[DBClusterIdentifier,Status]' --
output table
```

Viewing DB instance statusin an Aurora cluster

The status of a DB instance in an Aurora cluster indicates its current operational state. You can use the following procedures to view the DB instance status of a cluster in the Amazon RDS console, the Amazon CLI command, or the API operation.

> **Note**
>
> Amazon RDS also uses another status called *maintenance status*, which is shown in the **Maintenance** column of the Amazon RDS console. This value indicates the status of any maintenance patches that need to be applied to a DB instance. Maintenance status is independent of DB instance status. For more information about maintenance status, see Applying updates to a DB cluster.

Find the possible status values for DB instances in the following table. This table also shows whether you will be billed for the DB instance and storage, billed only for storage, or not billed. For all DB instance statuses, you are always billed for backup usage.

DB instance status	Billed	Description
available	Billed	The DB instance is available for modifications.
backing-up	Billed	The DB instance is currently being backed up.
backtracking	Billed	The DB instance is currently being backtracked. This status only applies to Aurora MySQL.
configuring-enhanced-monitoring	Billed	Enhanced Monitoring is being enabled or disabled for this DB instance.
configuring-iam-database-auth	Billed	Amazon Identity and Access Management (IAM) database authentication is being enabled or disabled for this DB instance.
configuring-log-exports	Billed	Publishing log files to Amazon CloudWatch Logs is being enabled or disabled for this DB instance.

DB instance status	Billed	Description
converting-to-vpc	Billed	The DB instance is being converted from a DB instance that is not in an Amazon Virtual Private Cloud (Amazon VPC) to a DB instance that is in an Amazon VPC.
creating	Not billed (non-PITR) Billed (PITR only)	The DB instance is being created. The DB instance is inaccessible while it is being created. If you restore a database during point-in-time recovery (PITR), you're billed while the database is in the **creating** state. This is the only scenario in which the **creating** state incurs charges.
delete-precheck	Not billed	Amazon RDS is validating that read replicas are safe to delete.
deleting	Not billed	The DB instance is being deleted.
failed	Not billed	The DB instance has failed and Amazon RDS can't recover it. Perform a point-in-time restore to the latest restorable time of the DB instance to recover the data.
inaccessible-encryption-credentials	Not billed	The Amazon KMS key used to encrypt or decrypt the DB instance can't be accessed or recovered.
inaccessible-encryption-credentials-recoverable	Billed for storage	The KMS key used to encrypt or decrypt the DB instance can't be accessed. However, if the KMS key is active, restarting the DB instance can recover it. For more information, see Encrypting an Amazon Aurora DB cluster.

DB instance status	Billed	Description
incompatible-create	Not billed	Amazon RDS is attempting to create a DB instance but can't do so because resources are incompatible with your DB instance. This status can occur if, for example, the instance profile for your DB instance doesn't have the correct permissions.
incompatible-network	Not billed	Amazon RDS is attempting to perform a recovery action on a DB instance but can't do so because the VPC is in a state that prevents the action from being completed. This status can occur if, for example, all available IP addresses in a subnet are in use and Amazon RDS can't get an IP address for the DB instance.
incompatible-option-group	Billed	Amazon RDS attempted to apply an option group change but can't do so, and Amazon RDS can't roll back to the previous option group state. For more information, check the **Recent Events** list for the DB instance. This status can occur if, for example, the option group contains an option such as TDE and the DB instance doesn't contain encrypted i nformation.

DB instance status	Billed	Description
incompatible-parameters	Billed	Amazon RDS can't start the DB instance because the parameters specified in the DB instance's DB parameter group aren't compatible with the DB instance. Revert the parameter changes or make them compatible with the DB instance to regain access to your DB instance. For more information about the incompatible parameters, check the **Recent Events** list for the DB instance. For Aurora serverless DB instances, this status can also indicate that CPU or memory demand repeatedly exceeded the maximum capacity configured for the DB cluster. For more information, see Avoiding out-of-memory errors and CPU saturation.
incompatible-restore	Not billed	Amazon RDS can't do a point-in-time restore. Common causes for this status include using temp tables or using MyISAM tables with MySQL.
insufficient-capacity	Not billed	Amazon RDS can't create your instance because sufficient capacity isn't currently available. To create your DB instance in the same AZ with the same instance type, delete your DB instance, wait a few hours, and try to create again. Alternatively, create a new instance using a different instance class or AZ.
maintenance	Billed	Amazon RDS is applying a maintenance update to the DB instance. This status is used for instance-level maintenance that RDS schedules well in advance.
modifying	Billed	The DB instance is being modified because of a customer request to modify the DB instance.

DB instance status	Billed	Description
moving-to-vpc	Billed	The DB instance is being moved to a new Amazon Virtual Private Cloud (Amazon VPC).
rebooting	Billed	The DB instance is being rebooted because of a customer request or an Amazon RDS process that requires the rebooting of the DB instance.
resetting-master-credentials	Billed	The master credentials for the DB instance are being reset because of a customer request to reset them.
renaming	Billed	The DB instance is being renamed because of a customer request to rename it.
restore-error	Billed	The DB instance encountered an error attempting to restore to a point-in-time or from a snapshot.
starting	Billed for storage	The DB instance is starting.
stopped	Billed for storage	The DB instance is stopped.
stopping	Billed for storage	The DB instance is being stopped.
storage-config-upgrade	Billed	The storage file system configuration of the DB instance is being upgraded. This status only applies to green databases within a blue/green deployment, or to DB instance read replicas.

DB instance status	Billed	Description
storage-full	Billed	The DB instance has reached its storage capacity allocation. This is a critical status, and we recommend that you fix this issue immediately. To do so, scale up your storage by modifying the DB instance. To avoid this situation, set Amazon CloudWatch alarms to warn you when storage space is getting low.
storage-initialization	Billed	The DB instance is loading data blocks from Amazon S3 to optimize volume performance after being restored from a snapshot. It remains available for operations, but performance might not be at its fullest until initialization completes. This status is set only for the green environment of a blue/green deployment. For other workflows that hydrate volumes from Amazon S3 (such as point-in-time recovery, snapshot restore, read replica creation, and Single-AZ to Multi-AZ conversion), the DB instance status remains **available** while initialization runs in the background. To monitor initialization progress per volume in all cases, use the `StorageOperationStatus` and `StorageOperationPercentProgress` fields in the DescribeDBInstances response. During initialization, `StorageOperationStatus` is set to `Initializing`.


DB instance status	Billed	Description
storage-optimization	Billed	Amazon RDS is optimizing the storage of your DB instance. The storage optimization process is usually short, but can sometimes take up to and even beyond 24 hours. During storage optimization, the DB instance remains available. Storage optimization is a background process that doesn't affect the instance's availability. To monitor optimization progress per volume, use the `StorageOperationStatus` and `StorageOperationPercentProgress` fields in the DescribeDBInstances response. During optimization, `StorageOperationStatus` is set to `Optimizing`.
upgrading	Billed	The database engine or operating system version is being upgraded.
upgrade-failed	Not billed	The DB instance has failed to upgrade to a supported version. Aurora creates a final snapshot with the prefix `rds-final`.

Console

To view the status of a DB instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.

   The **Databases page** appears with the list of DB instances. For each DB instance in a cluster, the status value is displayed.

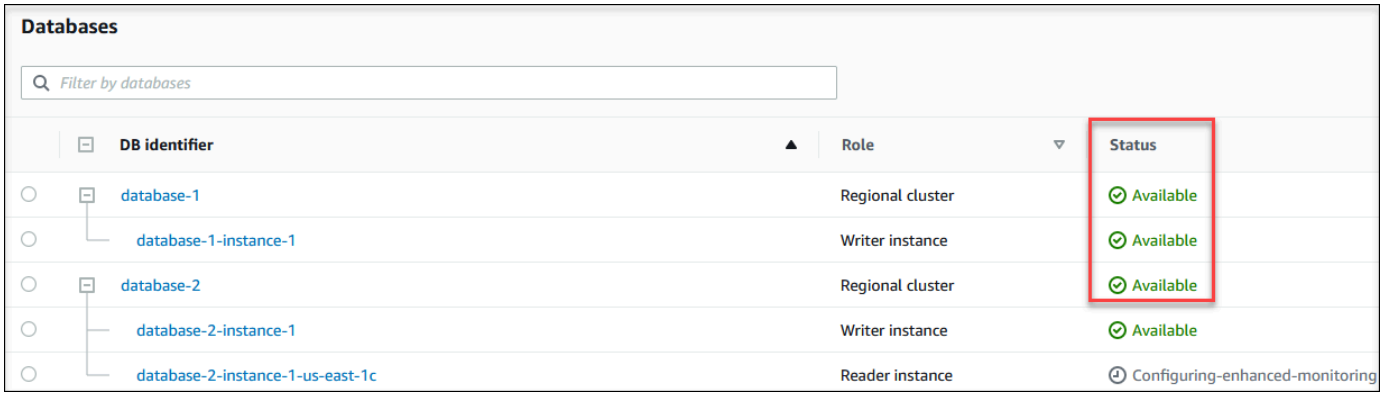

CLI

To view DB instance and its status information by using the Amazon CLI, use the describe-db-instances command. For example, the following Amazon CLI command lists all the DB instances information .

```
aws rds describe-db-instances
```

To view a specific DB instance and its status, call the describe-db-instances command with the following option:

- `DBInstanceIdentifier` – The name of the DB instance.

```
aws rds describe-db-instances --db-instance-identifier mydbinstance
```

To view just the status of all the DB instances, use the following query in Amazon CLI.

```
aws rds describe-db-instances --query 'DBInstances[*].
[DBInstanceIdentifier,DBInstanceStatus]' --output table
```

API

To view the status of the DB instance using the Amazon RDS API, call the DescribeDBInstances operation.

Recommendations from Amazon Aurora

Amazon Aurora provides automated recommendations for database resources, such as DB instances, DB clusters, and DB parameter groups. These recommendations provide best practice guidance by analyzing DB cluster configuration, DB instance configuration, usage, and performance data.

Amazon RDS Performance Insights monitors specific metrics and automatically creates thresholds by analyzing what levels are considered potentially problematic for a specified resource. When new metric values cross a predefined threshold over a given period of time, Performance Insights generates a proactive recommendation. This recommendation helps to prevent future database performance impact. For example, the "Idle In Transaction" recommendation is generated for Aurora PostgreSQL instances when the sessions connected to the database are not performing active work, but can keep database resources blocked. To receive proactive recommendations, you must turn on Performance Insights with a paid tier retention period. For information about turning on Performance Insights, see Enabling and disabling detailed per-query and database counter metrics. For information about pricing and data retention for Performance Insights see Pricing and data retention for Database Insights.

DevOps Guru for RDS monitors certain metrics to detect when the metric's behavior becomes highly unusual or anomalous. These anomalies are reported as reactive insights with recommendations. For example, DevOps Guru for RDS might recommend you to consider increasing CPU capacity or investigate wait events that are contributing to DB load. DevOps Guru for RDS also provides threshold based proactive recommendations. For these recommendations, you must turn on DevOps Guru for RDS. For information about turning on DevOps Guru for RDS, see Turning on DevOps Guru and specifying resource coverage.

Recommendations will be in any of the following status: active, dismissed, pending, or resolved. Resolved recommendations are available for 365 days.

You can view or dismiss the recommendations. You can apply a configuration based active recommendation immediately, schedule it in the next maintenance window, or dismiss it. For threshold based proactive and machine learning based reactive recommendations, you need to review the suggested cause of the issue and then perform the recommended actions to fix the issue.

For information about viewing and responding to recommendations, see Viewing Amazon Aurora recommendations.

Recommendations are supported in the following Amazon Web Services Regions:

- US East (Ohio)
- US East (N. Virginia)
- US West (N. California)
- US West (Oregon)
- Asia Pacific (Mumbai)
- Asia Pacific (Seoul)
- Asia Pacific (Singapore)
- Asia Pacific (Sydney)
- Asia Pacific (Tokyo)
- Canada (Central)
- Europe (Frankfurt)
- Europe (Ireland)
- Europe (London)
- Europe (Paris)
- Europe (Stockholm)
- South America (São Paulo)

Learn to view, apply, dismiss, and modify recommendations from Amazon Aurora in the following sections.

Topics

- Viewing Amazon Aurora recommendations
- Applying Amazon Aurora recommendations
- Dismissing Amazon Aurora recommendations
- Modifying dismissed Amazon Aurora recommendations to active recommendations
- Recommendations from Amazon Aurora reference

Viewing Amazon Aurora recommendations


Using the Amazon RDS console, you can view Amazon Aurora recommendations for your database resources. For a DB cluster, the recommendations appear for the DB cluster and its instances.

Console


To view the Amazon Aurora recommendations

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, do any of the following:

   - Choose **Recommendations**. The number of active recommendations for your resources and the number of recommendations with the highest severity generated in the last month are available next to **Recommendations**. To find the number of active recommendations for each severity, choose the number that shows the highest severity.

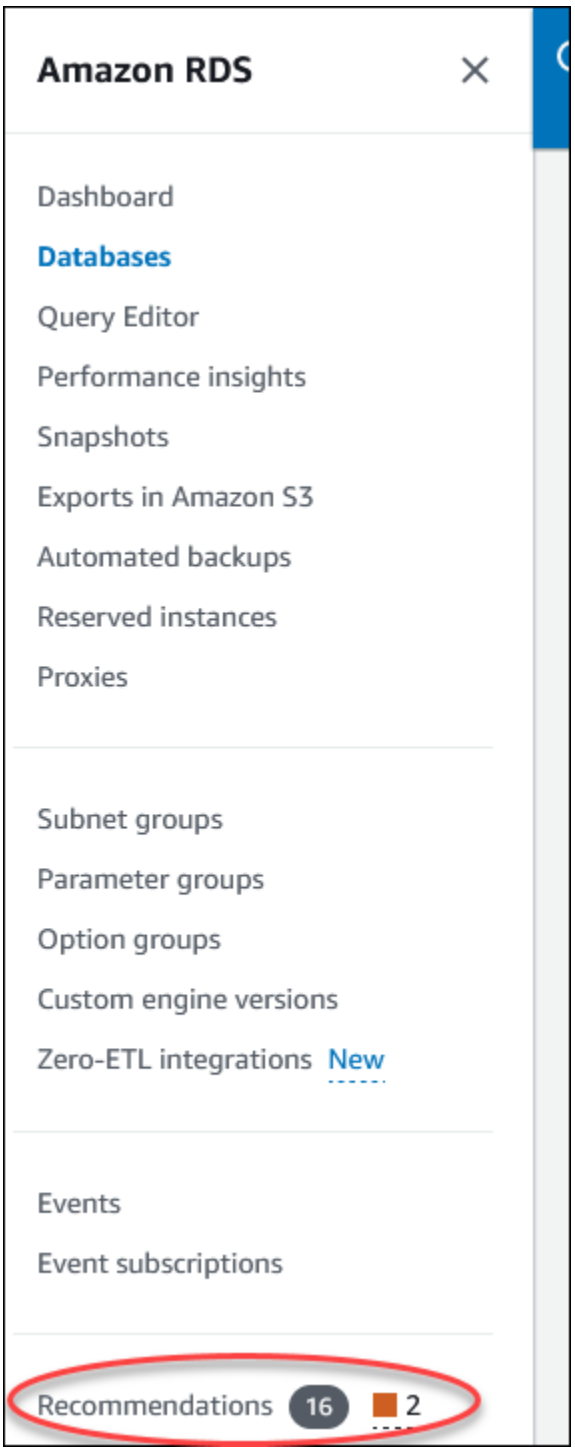


By default, the **Recommendations** page displays a list of new recommendations in the last month. Amazon Aurora gives recommendations for all the resources in your account and sorts the recommendations by their severity.

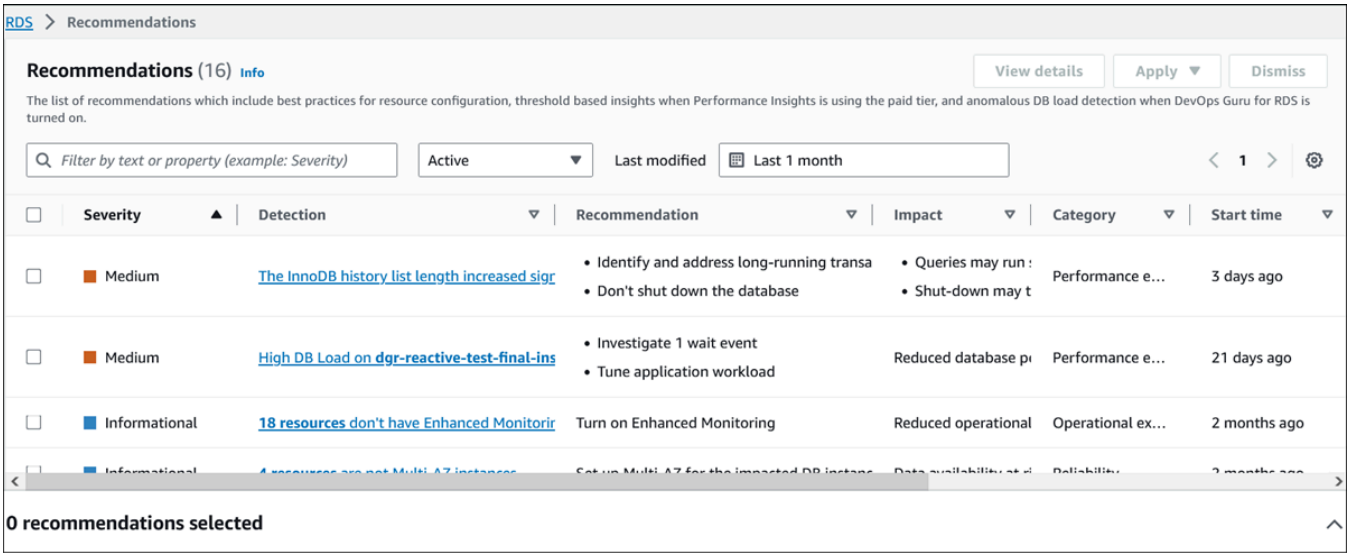


You can choose a recommendation to view the affected resources and details of how the recommendation will be applied.

- In the **Databases** page, choose **Recommendations** for a resource.

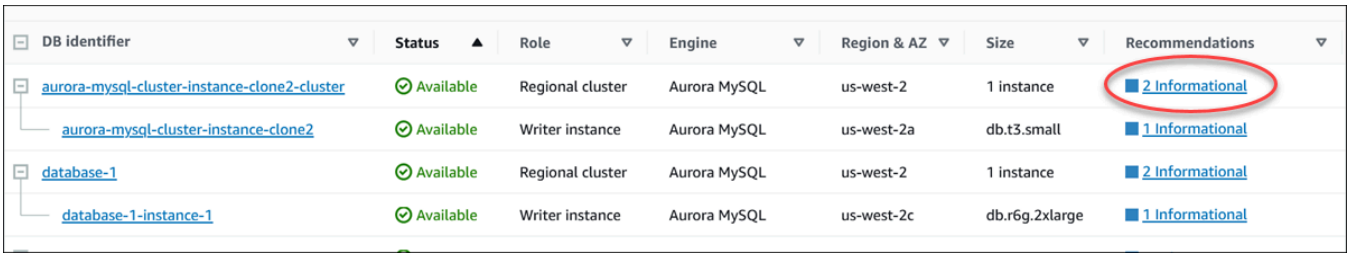


The **Recommendations** tab displays the recommendations and its details for the selected resource.

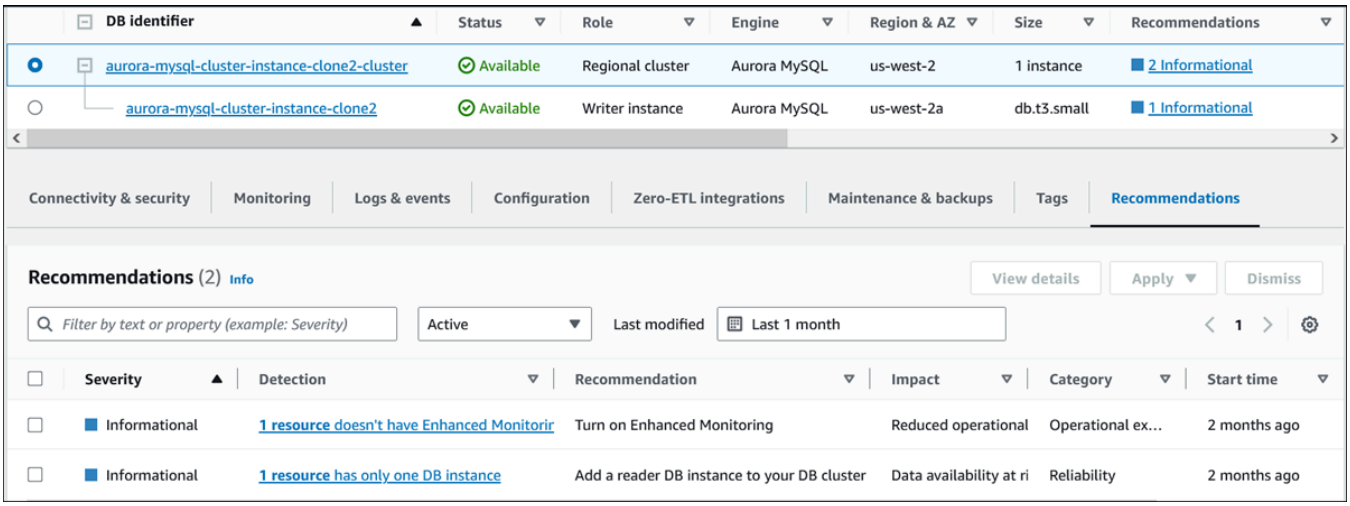

The following details are available for the recommendations:

- **Severity** – The implication level of the issue. The severity levels are **High**, **Medium**, **Low**, and **Informational**.
- **Detection** – The number of affected resources and a short description of the issue. Choose this link to view the recommendation and the analysis details.
- **Recommendation** – A short description of the recommended action to apply.
- **Impact** – A short description of the possible impact when the recommendation isn't applied.
- **Category** – The type of recommendation. The categories are **Performance efficiency**, **Security**, **Reliability**, **Cost optimization**, **Operational excellence**, and **Sustainability**.
- **Status** – The current status of the recommendation. The possible statuses are **All**, **Active**, **Dismissed**, **Resolved**, and **Pending**.
- **Start time** – The time when the issue began. For example, **18 hours ago**.
- **Last modified** – The time when the recommendation was last updated by the system because of a change in the **Severity**, or the time you responded to the recommendation. For example, **10 hours ago**.
- **End time** – The time when the issue ended. The time won't display for any continuing issues.
- **Resource identifier** – The name of one or more resources.


3. (Optional) Choose **Severity** or **Category** operators in the field to filter the list of recommendations.

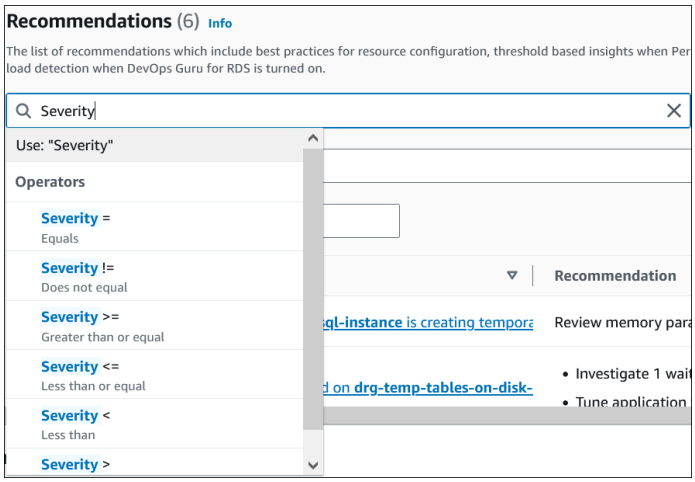


The recommendations for the selected operation appear.

4. (Optional) Choose any of the following recommendation status:

- **Active** (default) – Shows the current recommendations that you can apply, schedule it for the next maintenance window, or dismiss.
- **All** – Shows all the recommendations with the current status.
- **Dismissed** – Shows the dismissed recommendations.
- **Resolved** – Shows the recommendations that are resolved.
- **Pending** – Shows the recommendations whose recommended actions are in progress or scheduled for the next maintenance window.

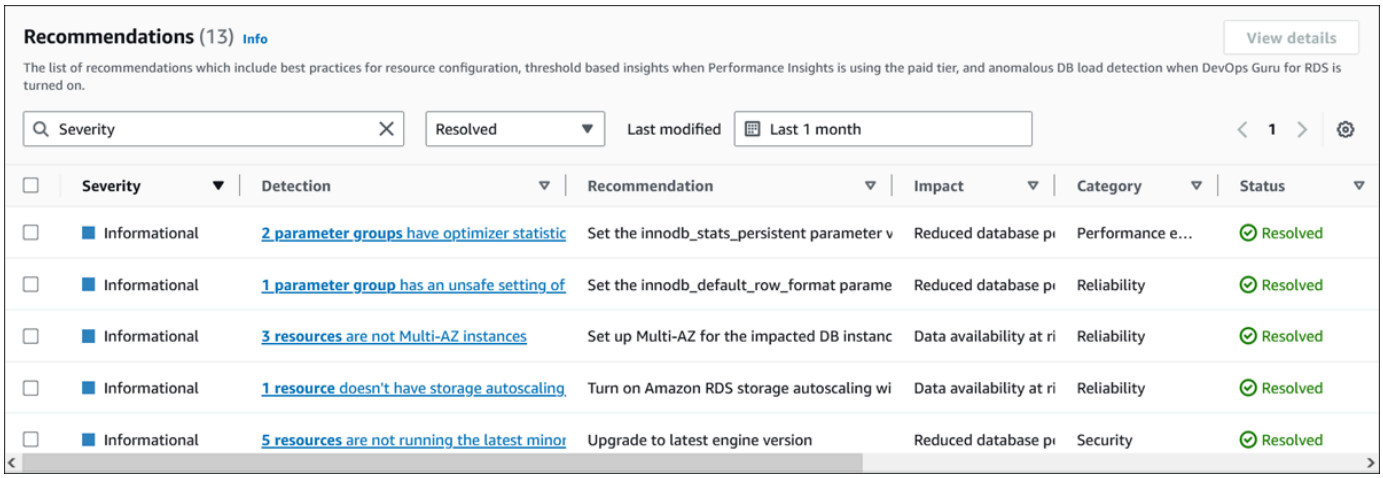


5. (Optional) Choose **Relative mode** or **Absolute mode** in **Last modified** to modify the time period. The **Recommendations** page displays the recommendations generated in the time period. The default time period is the last month. In the **Absolute mode**, you can choose the time period, or enter the time in **Start date** and **End date** fields.

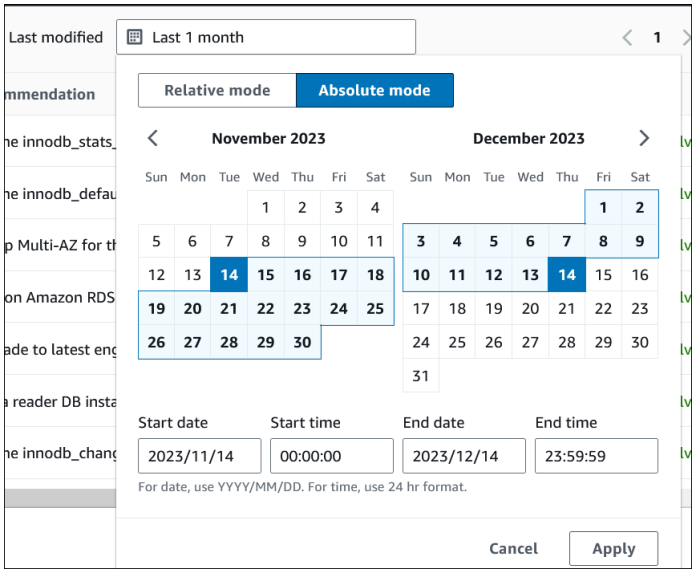

The recommendations for the set time period display.

Note that you can see all recommendations for resources in your account by setting the range to **All**.

6. (Optional) Choose **Preferences** in the right to customize the details to display. You can choose a page size, wrap the lines of the text, and allow or hide the columns.
7. (Optional) Choose a recommendation and then choose **View details**.

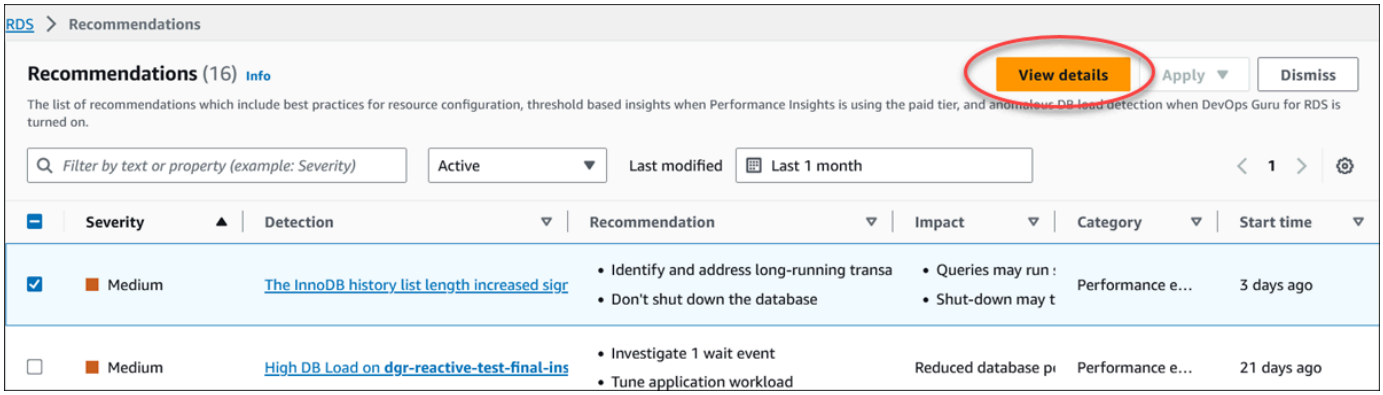


The recommendation details page appears. The title provides the total count of the resources with the issue detected and the severity.

For information about the components on the details page for an anomaly based reactive recommendation, see Viewing reactive anomalies in the *Amazon DevOps Guru User Guide*.


For information about the components on the details page for a threshold based proactive recommendation, see Viewing Database Insights proactive recommendations.

The other automated recommendations display the following components on the recommendation details page:


- **Recommendation** – A summary of the recommendation and whether downtime is required to apply the recommendation.

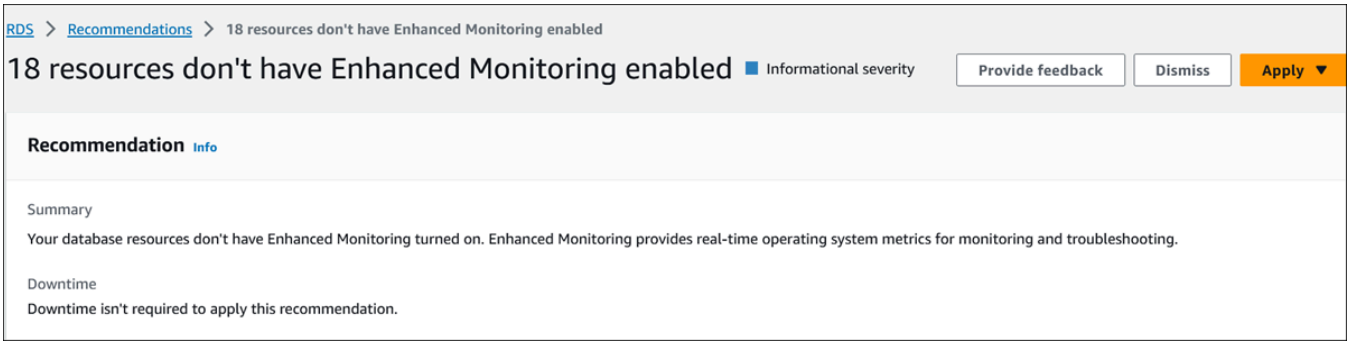

- **Resources affected** – Details of the affected resources.

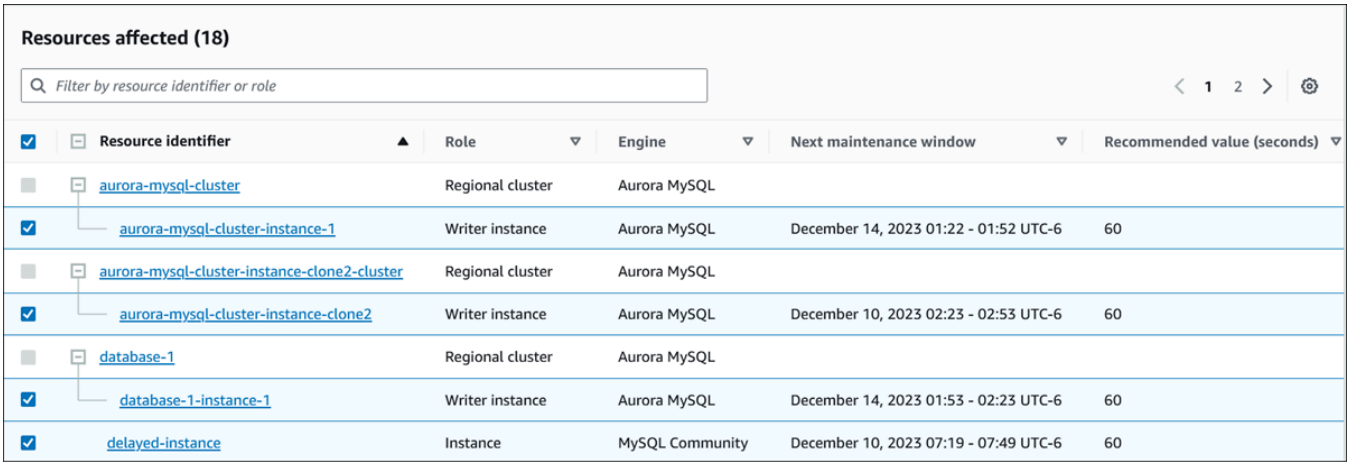

- **Recommendation details** – Supported engine information, any required associated cost to apply the recommendation, and documentation link to learn more.

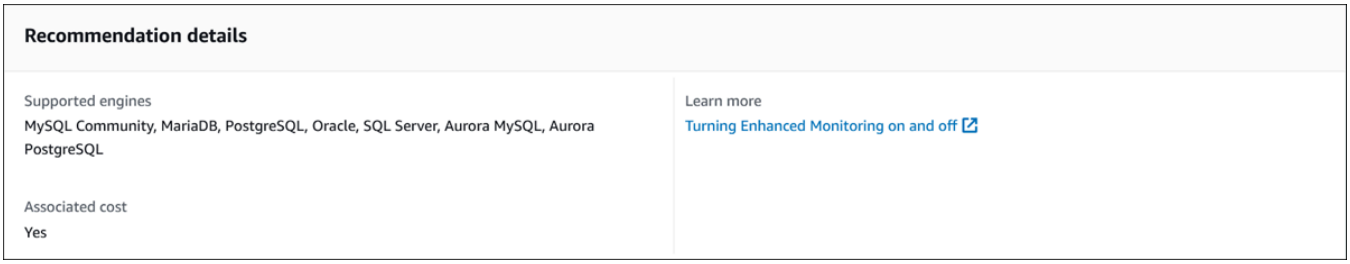

CLI

To view Amazon RDS recommendations of the DB instances or DB clusters, use the following command in Amazon CLI.

```
aws rds describe-db-recommendations
```

RDS API

To view Amazon RDS recommendations using the Amazon RDS API, use the DescribeDBRecommendations operation.

Applying Amazon Aurora recommendations

To apply Amazon Aurora recommendations using the Amazon RDS console, select a configuration based recommendation or an affected resource in the details page. Then, choose to apply the recommendation immediately or schedule it for the next maintenance window. The resource might need to restart for the change to take effect. For a few DB parameter group recommendations, you might need to restart the resources.

The threshold based proactive or anomaly based reactive recommendations won't have the apply option and might need additional review.

Console

To apply a configuration based recommendation

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, perform any of the following:

   - Choose **Recommendations**.

     The **Recommendations** page appears with the list of all recommendations.
   - Choose **Databases** and then choose **Recommendations** for a resource in the databases page.


     The details appear in the **Recommendations** tab for the selected recommendation.
   - Choose **Detection** for an active recommendation in the **Recommendations** page or the **Recommendations** tab in the **Databases** page.

     The recommendation details page appears.
3. Choose a recommendation, or one or more affected resources in the recommendation details page, and do any of the following:

   - Choose **Apply** and then choose **Apply immediately** to apply the recommendation immediately.

- Choose **Apply** and then choose **Apply in next maintenance window** to schedule in the next maintenance window.


  The selected recommendation status is updated to pending until the next maintenance window.

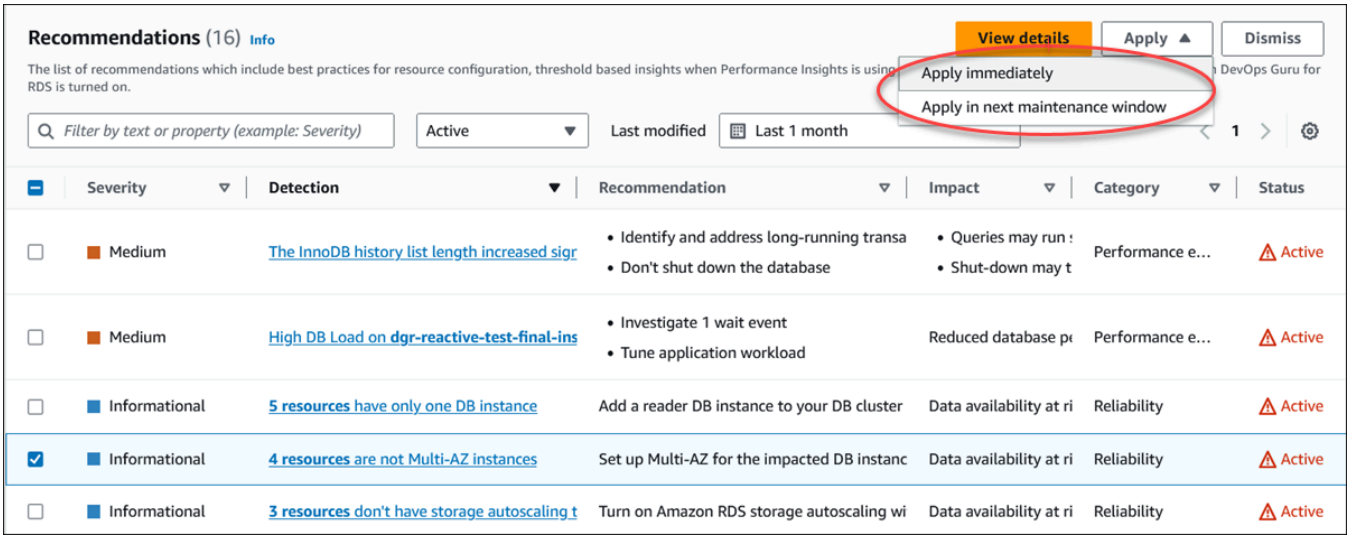


  A confirmation window appears.

4. Choose **Confirm application** to apply the recommendation. This window confirms whether the resources need an automatic or manual restart for the changes to take effect.

   The following example shows the confirmation window to apply the recommendation immediately.

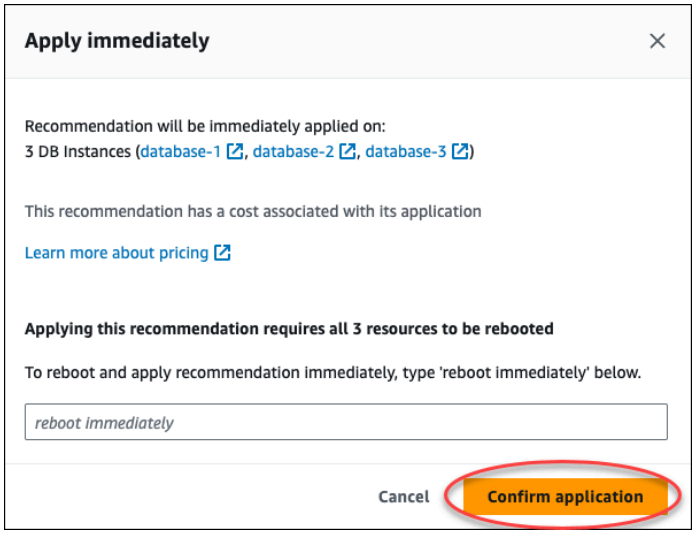

The following example shows the confirmation window to schedule applying the recommendation in the next maintenance window.

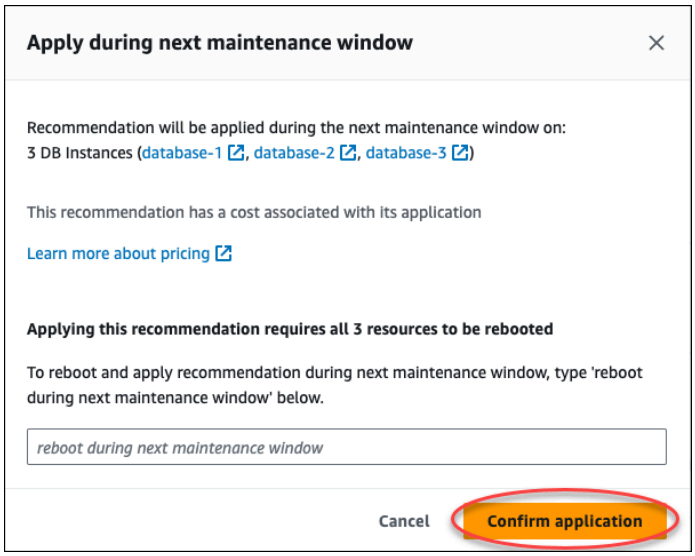

A banner displays a message when the recommendation applied is successful or has failed.

The following example shows the banner with the successful message.



The following example shows the banner with the failure message.



RDS API

To apply a configuration based Aurora recommendation using the Amazon RDS API

1. Use the DescribeDBRecommendations operation. The `RecommendedActions` in the output can have one or more recommended actions.
2. Use the RecommendedAction object for each recommended action from step 1. The output contains `Operation` and `Parameters`.

   The following example shows the output with one recommended action.

```
    "RecommendedActions": [
        {
            "ActionId": "0b19ed15-840f-463c-a200-b10af1b552e3",
            "Title": "Turn on auto backup", // localized
            "Description": "Turn on auto backup for my-mysql-instance-1", //
localized
            "Operation": "ModifyDbInstance",
            "Parameters": [
                {
                    "Key": "DbInstanceIdentifier",
                    "Value": "my-mysql-instance-1"
                },
                {
                    "Key": "BackupRetentionPeriod",
                    "Value": "7"
                }
            ],
            "ApplyModes": ["immediately", "next-maintenance-window"],
            "Status": "applied"
        },
        ... // several others
    ],
```

3. Use the `operation` for each recommended action from the output in step 2 and input the `Parameters` values.
4. After the operation in step 2 is successful, use the ModifyDBRecommendation operation to modify the recommendation status.

Dismissing Amazon Aurora recommendations

You can dismiss one or more Amazon Aurora recommendations using the Amazon RDS console, Amazon CLI, or Amazon RDS API.

Console

To dismiss one or more recommendations

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, perform any of the following:

- Choose **Recommendations**.

  The **Recommendations** page appears with the list of all recommendations.

- Choose **Databases** and then choose **Recommendations** for a resource in the databases page.


  The details appear in the **Recommendations** tab for the selected recommendation.

- Choose **Detection** for an active recommendation in the **Recommendations** page or the **Recommendations** tab in the **Databases** page.

  The recommendation details page displays the list of affected resources.


3. Choose one or more recommendation, or one or more affected resources in the recommendation details page, and then choose **Dismiss**.

   The following example shows the **Recommendations** page with multiple active recommendations selected to dismiss.

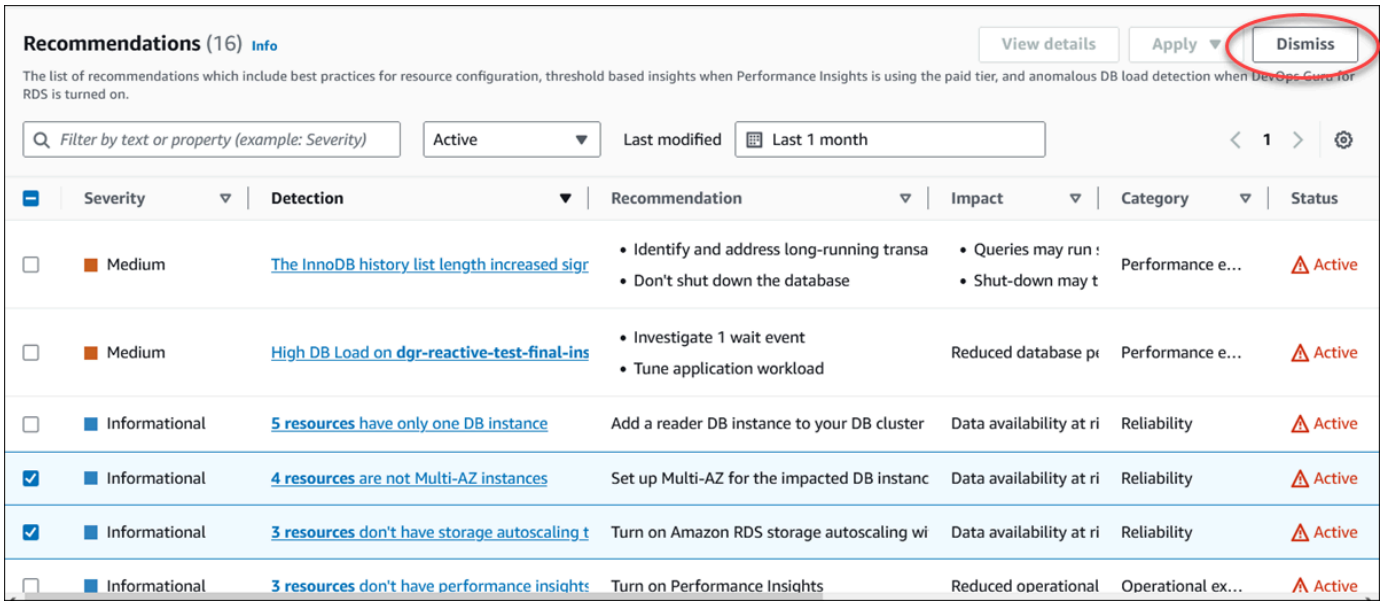

   A banner displays a message when the selected one or more recommendations are dismissed.

   The following example shows the banner with the successful message.



   The following example shows the banner with the failure message.



CLI

To dismiss an Aurora recommendation using the Amazon CLI

1. Run the command `aws rds describe-db-recommendations --filters "Name=status,Values=active"`.

   The output provides a list of recommendations in `active` status.
2. Find the `recommendationId` for the recommendation that you want to dismiss from step 1.
3. Run the command `>aws rds modify-db-recommendation --status dismissed --recommendationId <ID>` with the `recommendationId` from step 2 to dismiss the recommendation.

RDS API

To dismiss an Aurora recommendation using the Amazon RDS API, use the ModifyDBRecommendation operation.

Modifying dismissed Amazon Aurora recommendations to active recommendations

You can move one or more dismissed Amazon Aurora recommendations to active recommendations using the Amazon RDS console, Amazon CLI, or Amazon RDS API.

Console

To move one or more dismissed recommendations to active recommendations

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, perform any of the following:


   - Choose **Recommendations**.

The **Recommendations** page displays a list of recommendations sorted by the severity for all the resources in your account.

- Choose **Databases** and then choose **Recommendations** for a resource in the databases page.


  The **Recommendations** tab displays the recommendations and its details for the selected resource.

3. Choose one or more dismissed recommendations from the list and then choose **Move to active**.

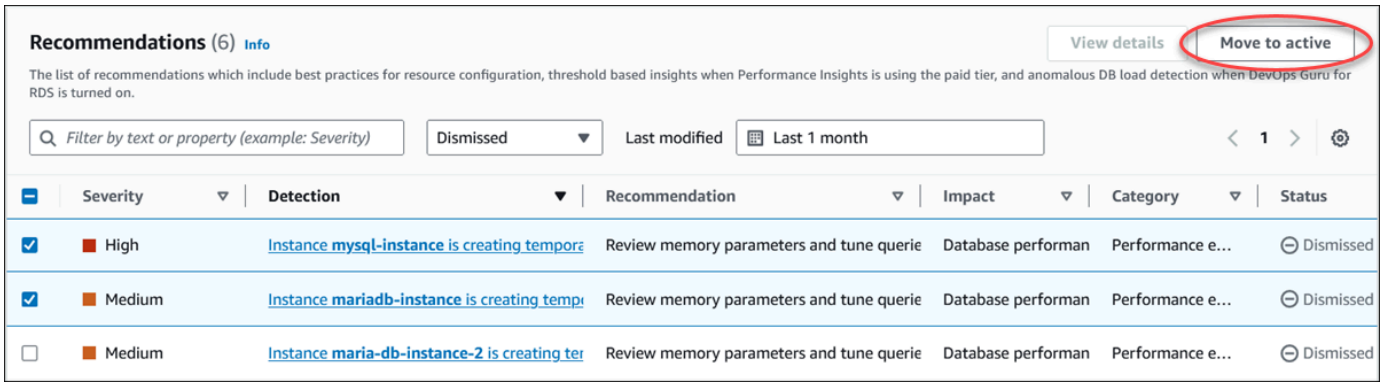

A banner displays a successful or failure message when the moving the selected recommendations from dismissed to active status.

The following example shows the banner with the successful message.



The following example shows the banner with the failure message.



CLI

To change a dismissed Aurora recommendation to active recommendation using the Amazon CLI

1. Run the command `aws rds describe-db-recommendations --filters "Name=status,Values=dismissed"`.

The output provides a list of recommendations in `dismissed` status.

2. Find the `recommendationId` for the recommendation that you want to change the status from step 1.
3. Run the command `>aws rds modify-db-recommendation --status active --recommendationId <ID>` with the `recommendationId` from step 2 to change to active recommendation.

RDS API

To change a dismissed Aurora recommendation to active recommendation using the Amazon RDS API, use the ModifyDBRecommendation operation.

Recommendations from Amazon Aurora reference

Amazon Aurora generates recommendations for a resource when the resource is created or modified. You can find examples of recommendations from Amazon Aurora in the following table.

Type	Description	Recommendation	Downt require	Additional informati on
Resource Automated backups is turned off	Automated backups aren't turned on for your DB instances. Automated backups are recommend ed because they enable point-in-time recovery of your DB instances.	Turn on automated backups with a retention period of up to 14 days.	Yes	Overview of backing up and restoring an Aurora DB cluster Demystifying Amazon RDS backup storage costs on the Amazon Database Blog
Engine minor version upgrade is required	Your database resources aren't running the latest minor DB engine version. The latest minor version	Upgrade to latest engine version.	Yes	Maintaining an Amazon Aurora DB cluster

Type	Description	Recommendation	Downt require	Additional informati on
	contains the latest security fixes and other improvements.			
Enhanced Monitoring is turned off	Your database resources don't have Enhanced Monitoring turned on. Enhanced Monitoring provides real-time operating system metrics for monitoring and troubleshooting.	Turn on Enhanced Monitoring.	No	Monitoring OS metrics with Enhanced Monitoring

Type	Description	Recommendation	Downt require	Additional informati on
Storage encryption is turned off	Amazon RDS supports encryptio n at rest for all the database engines by using the keys that you manage in Amazon Key Management Service (Amazon KMS). On an active DB instance with Amazon RDS encryption, the data stored at rest in the storage is encrypted, similar to automated backups, read replicas, and snapshots. If encryption isn't turned on while creating an Aurora DB cluster, you must restore a decrypted snapshot to an encrypted DB cluster.	Turn on encryption of data at rest for your DB cluster.	Yes	Security in Amazon Aurora
DB clusters with all instances in the same Availability Zone	The DB clusters are currently in a single Availability Zone. Use multiple Availability Zones to improve the availability.	Add the DB instances to multiple Availabil ity Zones in your DB cluster.	No	High availability for Amazon Aurora

Type	Description	Recommendation	Downt require	Additional informati on
DB instances in the clusters with heterogen eous instance sizes	We recommend that you use the same DB instance class and size for all the DB instances in your DB cluster.	Use the same instance class and size for all the DB instances in your DB cluster.	Yes	Replication with Amazon Aurora
DB instances in the clusters with heterogen eous instance classes	We recommend that you use the same DB instance class and size for all the DB instances in your DB cluster.	Use the same instance class and size for all the DB instances in your DB cluster.	Yes	Replication with Amazon Aurora
DB instances in the clusters with heterogen eous parameter groups	We recommend that all of the DB instances in the DB cluster use the same DB parameter group.	Associate the DB instance with the DB parameter group associated with the writer instance in your DB cluster.	No	Parameter groups for Amazon Aurora
Amazon RDS DB clusters have one DB instance	Add at least one more DB instance to your DB cluster to improve availability and performance.	Add a reader DB instance to your DB cluster.	No	High availability for Amazon Aurora

Type	Description	Recommendation	Downt require	Additional informati on
Performan ce Insights is turned off	Performance Insights monitors your DB instance load to help you analyze and resolve database performance issues. We recommend that you turn on Performance Insights.	Turn on Performance Insights.	No	Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora
RDS resources major versions update is required	Databases with the current major version for the DB engine won't be supported. We recommend that you upgrade to the latest major version which includes new functionality and enhancements.	Upgrade to the latest major version for the DB engine.	Yes	Amazon Aurora updates Creating a blue/gree n deployment in Amazon Aurora
DB cluster maximum volume size	Newer engine versions support larger storage volumes for your DB cluster.	We recommend that you upgrade the engine version of your DB cluster to the latest version to benefit from increased storage capacity.	Yes	Amazon Aurora size limits

Type	Description	Recommendation	Downt require	Additional informati on
DB clusters with all reader instances in the same Availability Zone	Availability Zones (AZs) are locations that are distinct from each other to provide isolation in case of outages within each Amazon Region. We recommend that you distribute the primary instance and reader instances in your DB cluster across multiple AZs to improve the availability of your DB cluster. You can create a Multi-AZ cluster using the Amazon Managemen t Console, Amazon CLI, or Amazon RDS API when you create the cluster. You can modify the existing Aurora cluster to a Multi-AZ cluster by adding a new reader instance and specifying a different AZ.	Your DB cluster has all of its read instances in the same Availability Zone. We recommend that you distribute the reader instances across multiple Availability Zones. Distribution increases availabil ity and improves response time by reducing network latency between clients and the database.	No	High availability for Amazon Aurora

Type	Description	Recommendation	Downt require	Additional informati on
DB memory parameters are diverging from default	The memory parameters of the DB instances are significa ntly different from the default values. These settings can impact performance and cause errors. We recommend that you reset the custom memory parameters for the DB instance to their default values in the DB parameter group.	Reset the memory parameters to their default values.	No	Parameter groups for Amazon Aurora
Query cache parameter is turned on	When changes require that your query cache is purged, your DB instance will appear to stall. Most workloads don't benefit from a query cache. The query cache was removed from MySQL 8.0 and higher versions. We recommend that you set the query_cac he_type parameter to 0.	Set the `query_cac he_type` parameter value to `0` in your DB parameter groups.	Yes	Parameter groups for Amazon Aurora

Type	Description	Recommendation	Downt require	Additional informati on
log_outpu t parameter is set to table	When log_output is set to TABLE, more storage is used than when log_outpu t is set to FILE. We recommend that you set the parameter to FILE, to avoid reaching the storage size limit. Set to FILE by default in MySQL 8.4 and higher versions.	Set the log_outpu t parameter value to FILE in your DB parameter groups.	No	AuroraMySQL database log files
autovacuu m parameter is turned off	The autovacuum parameter is turned off for your DB clusters. Turning autovacuum off increases the table and index bloat and impacts the performance. We recommend that you turn on autovacuum in your DB parameter groups.	Turn on the autovacuum parameter in your DB cluster parameter groups.	No	Understanding autovacuum in Amazon RDS for PostgreSQL environments on the Amazon Database Blog

Type	Description	Recommendation	Downt require	Additional informati on
synchrono us_commit parameter is turned off	When synchrono us_commit parameter is turned off, data can be lost in a database crash. The durability of the database is at risk. We recommend that you turn on the synchrono us_commit parameter.	Turn on synchrono us_commit parameter in your DB parameter groups.	Yes	Amazon Aurora PostgreSQL parameters: Replicati on, security, and logging on the Amazon Database Blog
track_cou nts parameter is turned off	When the track_counts parameter is turned off, the database doesn't collect the database activity statistics. Autovacuu m requires these statistics to work correctly. We recommend that you set track_cou nts parameter to 1.	Set track_counts parameter to 1.	No	Run-time Statistics for PostgreSQL

Type	Description	Recommendation	Downt require	Additional informati on
enable_in dexonlysc an parameter is turned off	The query planner or optimizer can't use the index-only scan plan type when it is turned off. We recommend that you set the enable_in dexonlyscan parameter value to 1.	Set the enable_in dexonlyscan parameter value to 1.	No	Planner Method Configuration for PostgreSQL
enable_in dexscan parameter is turned off	The query planner or optimizer can't use the index scan plan type when it is turned off. We recommend that you set the enable_in dexscan value to 1.	Set the enable_in dexscan parameter value to 1.	No	Planner Method Configuration for PostgreSQL

Type	Description	Recommendation	Downt require	Additional informati on
innodb_fl ush_log_a t_trx parameter is turned off	The value of the innodb_fl ush_log_at_trx parameter of your DB instance isn't safe value. This parameter controls the persistence of commit operations to disk. We recommend that you set the innodb_fl ush_log_at_trx parameter to 1.	Set the innodb_fl ush_log_at_trx parameter value to 1.	No	Configuring how frequently the log buffer is flushed

Type	Description	Recommendation	Downt require	Additional informati on
`innodb_st ats_persi stent` parameter is turned off	Your DB instance isn't configured to persist the InnoDB statistics to the disk. When the statistics aren't stored, they are recalculated each time the instance restarts and the table accessed. This leads to variations in the query execution plan. You can modify the value of this global parameter at the table level. We recommend that you set the `innodb_st ats_persistent` parameter value to `ON`.	Set the `innodb_st ats_persistent` parameter value to `ON`.	No	Parameter groups for Amazon Aurora

Type	Description	Recommendation	Downt require	Additional informati on
innodb_op en_files parameter is low	The innodb_op en_files parameter controls the number of files InnoDB can open at one time. InnoDB opens all of the log and system tablespac e files when mysqld is running. Your DB instance has a low value for the maximum number of files InnoDB can open at one time. We recommend that you set the innodb_op en_files parameter to a minimum value of 65.	Set the innodb_op en_files parameter to a minimum value of 65.	Yes	InnoDB open files for MySQL

Type	Description	Recommendation	Downt require	Additional informati on
max_user_ connectio ns parameter is low	Your DB instance has a low value for the maximum number of simultaneous connections for each database account. We recommend setting the max_user_ connections parameter to a number greater than 5.	Increase the value of the max_user_ connections parameter to a number greater than 5.	Yes	Setting Account Resource Limits for MySQL
Read Replicas are open in writable mode	Your DB instance has a read replica in writable mode, which allows updates from clients. We recommend that you set the read_only parameter to TrueIfReplica so that the read replicas isn't in writable mode.	Set the read_only parameter value to TrueIfReplica .	No	Parameter groups for Amazon Aurora

Type	Description	Recommendation	Downt require	Additional informati on
innodb_de fault_row _format parameter setting is unsafe	Your DB instance encounters a known issue: A table created in a MySQL version lower than 8.0.26 with the row_forma t set to COMPACT or REDUNDANT will be inaccessible and unrecoverable when the index exceeds 767 bytes. We recommend that you set the innodb_de fault_row _format parameter value to DYNAMIC.	Set the innodb_de fault_row _format parameter value to DYNAMIC.	No	Changes in MySQL 8.0.26

Type	Description	Recommendation	Downt requir	Additional informati on
`general_l ogging` parameter is turned on	The general logging is turned on for your DB instance. This setting is useful while troubleshooting the database issues. However, turning on general logging increases the amount of I/O operations and allocated storage space, which might result in contentio n and performance degradation. Check your requireme nts for general logging usage. We recommend that you set the `general_l ogging` parameter value to `0`.	Check your requireme nts for general logging usage. If it isn't mandatory , we recommend that you to set the `general_logging` parameter value to `0`.	No	Overview of Aurora MySQL database logs

Type	Description	Recommendation	Downt require	Additional informati on
DB cluster under-pro visioned for read workload	We recommend that you add a reader DB instance to your DB cluster with the same instance class and size as the writer DB instance in the cluster. The current configuration has one DB instance with a continuou sly high database load caused mostly by read operation s. Distribute these operations by adding another DB instance to the cluster and directing the read workload to the DB cluster read-only endpoint.	Add a reader DB instance to the cluster.	No	Adding Aurora Replicas to a DB cluster Managing performan ce and scaling for Aurora DB clusters Amazon RDS pricing

Type	Description	Recommendation	Downt require	Additional informati on
RDS instance under-pro visioned for system memory capacity	We recommend that you tune your queries to use lesser memory or use a DB instance type with higher allocated memory. When the instance is running low on memory, then the database performan ce is impacted.	Use a DB instance with higher memory capacity	Yes	Scaling Your Amazon RDS Instance Verticall y and Horizontally on the Amazon Database Blog Amazon RDS instance types Amazon RDS pricing
RDS instance under-pro visioned for system CPU capacity	We recommend that you tune your queries to use less CPU or modify your DB instance to use a DB instance class with higher allocated vCPUs. Database performance might decline when a DB instance is running low on CPU.	Use a DB instance with higher CPU capacity	Yes	Scaling Your Amazon RDS Instance Verticall y and Horizontally on the Amazon Database Blog Amazon RDS instance types Amazon RDS pricing

Type	Description	Recommendation	Downt require	Additional informati on
RDS resources are not utilizing connectio n pooling correctly	We recommend that you enable Amazon RDS Proxy to efficient ly pool and share existing database connections. If you are already using a proxy for your database, configure it correctly to improve connection pooling and load balancing across multiple DB instances. RDS Proxy can help reduce the risk of connectio n exhaustion and downtime while improving availability and scalability.	Enable RDS Proxy or modify your existing proxy configuration	No	Scaling Your Amazon RDS Instance Verticall y and Horizontally on the Amazon Database Blog Amazon RDS Proxy for Aurora Amazon RDS Proxy Pricing

Viewing metrics in the Amazon RDS console

Amazon RDS integrates with Amazon CloudWatch to display a variety of Aurora DB cluster metrics in the RDS console. Some metrics are apply at the cluster level, whereas others apply at the instance level. For descriptions of the instance-level and cluster-level metrics, see Metrics reference for Amazon Aurora.

For your Aurora DB cluster, the following categories of metrics are monitored:

- **CloudWatch** – Shows the Amazon CloudWatch metrics for Aurora that you can access in the RDS console. You can also access these metrics in the CloudWatch console. Each metric includes a graph that shows the metric monitored over a specific time span. For a list of CloudWatch metrics, see Amazon CloudWatch metrics for Amazon Aurora.
- **Enhanced monitoring** – Shows a summary of operating-system metrics when your Aurora DB cluster has turned on Enhanced Monitoring. RDS delivers the metrics from Enhanced Monitoring to your Amazon CloudWatch Logs account. Each OS metric includes a graph showing the metric monitored over a specific time span. For an overview, see Monitoring OS metrics with Enhanced Monitoring. For a list of Enhanced Monitoring metrics, see OS metrics in Enhanced Monitoring.
- **OS Process list** – Shows details for each process running in your DB cluster.
- **Database Insights** – Opens the Amazon CloudWatch Database Insights dashboard for a DB instance in your Aurora DB cluster. Database Insights isn't supported at the cluster level. For an overview, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora. For a list of metrics, see Amazon CloudWatch metrics for Amazon RDS Performance Insights.

Amazon CloudWatch Database Insights provides a consolidated view of database load and CloudWatch metrics for your DB cluster. For more information, see Monitoring Amazon Aurora databases with CloudWatch Database Insights.

Monitoring Amazon Aurora metrics with Amazon CloudWatch

Amazon CloudWatch is a metrics repository. The repository collects and processes raw data from Amazon Aurora into readable, near real-time metrics. For a complete list of Amazon Aurora metrics sent to CloudWatch, see Metrics reference for Amazon Aurora.

To analyze and troubleshoot the performance of your databases at scale, use CloudWatch Database Insights.

Topics


- Overview of Amazon Aurora and Amazon CloudWatch
- Viewing DB cluster metrics in the CloudWatch console and Amazon CLI
- Creating CloudWatch alarms to monitor Amazon Aurora

Overview of Amazon Aurora and Amazon CloudWatch

By default, Amazon Aurora automatically sends metric data to CloudWatch in 1-minute periods. For example, the `CPUUtilization` metric records the percentage of CPU utilization for a DB instance over time. Data points with a period of 60 seconds (1 minute) are available for 15 days. This means that you can access historical information and see how your web application or service is performing.

For information about monitoring database load in CloudWatch, see Monitoring Amazon Aurora databases with CloudWatch Database Insights.

As shown in the following diagram, you can set up alarms for your CloudWatch metrics. For example, you might create an alarm that signals when the CPU utilization for an instance is over 70%. You can configure Amazon Simple Notification Service to email you when the threshold is passed.

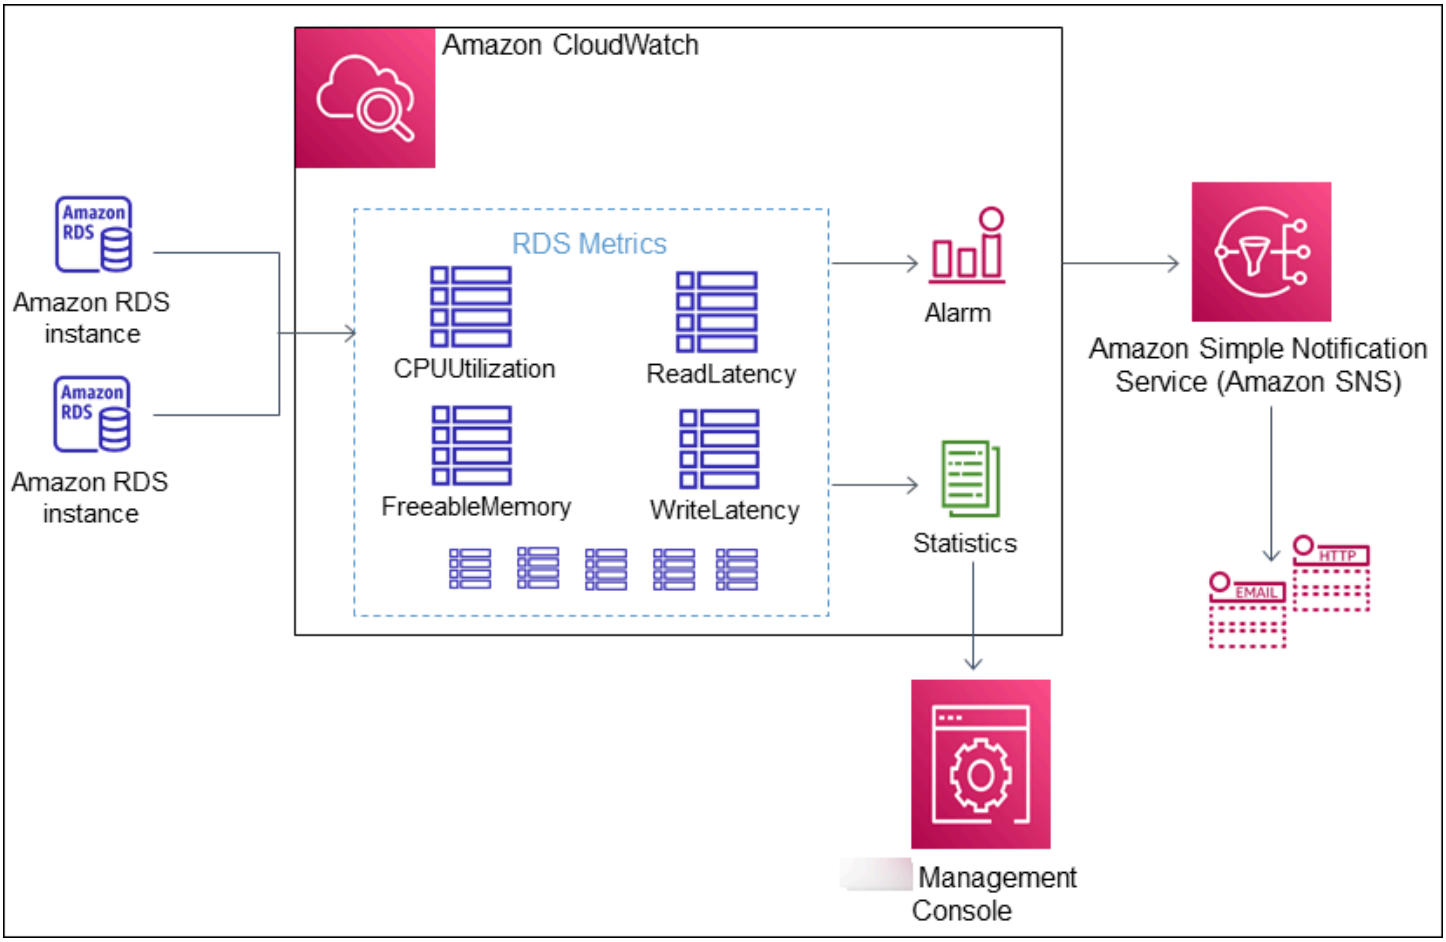

Amazon RDS publishes the following types of metrics to Amazon CloudWatch:

- Aurora metrics at both the cluster and instance level

  For a table of these metrics, see Amazon CloudWatch metrics for Amazon Aurora.

- Detailed per-query and database counter metrics (exposed through the Performance Insights API)

  For a table of these metrics, see Amazon CloudWatch metrics for Amazon RDS Performance Insights and Detailed Database Metrics.

- Enhanced Monitoring metrics (published to Amazon CloudWatch Logs)

  For a table of these metrics, see OS metrics in Enhanced Monitoring.

- Usage metrics for the Amazon RDS service quotas in your Amazon Web Services account

  For a table of these metrics, see Amazon CloudWatch usage metrics for Amazon Aurora. For more information about Amazon RDS quotas, see Quotas and constraints for Amazon Aurora.

For more information about CloudWatch, see What is Amazon CloudWatch? in the *Amazon CloudWatch User Guide*. For more information about CloudWatch metrics retention, see Metrics retention.

Viewing DB cluster metrics in the CloudWatch console and Amazon CLI

Following, you can find details about how to view metrics for your DB instance using CloudWatch. For information on monitoring metrics for your DB instance's operating system in real time using CloudWatch Logs, see Monitoring OS metrics with Enhanced Monitoring.

When you use Amazon Aurora resources, Amazon Aurora sends metrics and dimensions to Amazon CloudWatch every minute.

For information about monitoring database load in CloudWatch, see Monitoring Amazon Aurora databases with CloudWatch Database Insights.

Use the following procedures to view the metrics for Amazon Aurora in the CloudWatch console and CLI.


Console

To view metrics using the Amazon CloudWatch console

Metrics are grouped first by the service namespace, and then by the various dimension combinations within each namespace.


1. Open the CloudWatch console at https://console.amazonaws.cn/cloudwatch/.

   The CloudWatch overview home page appears.

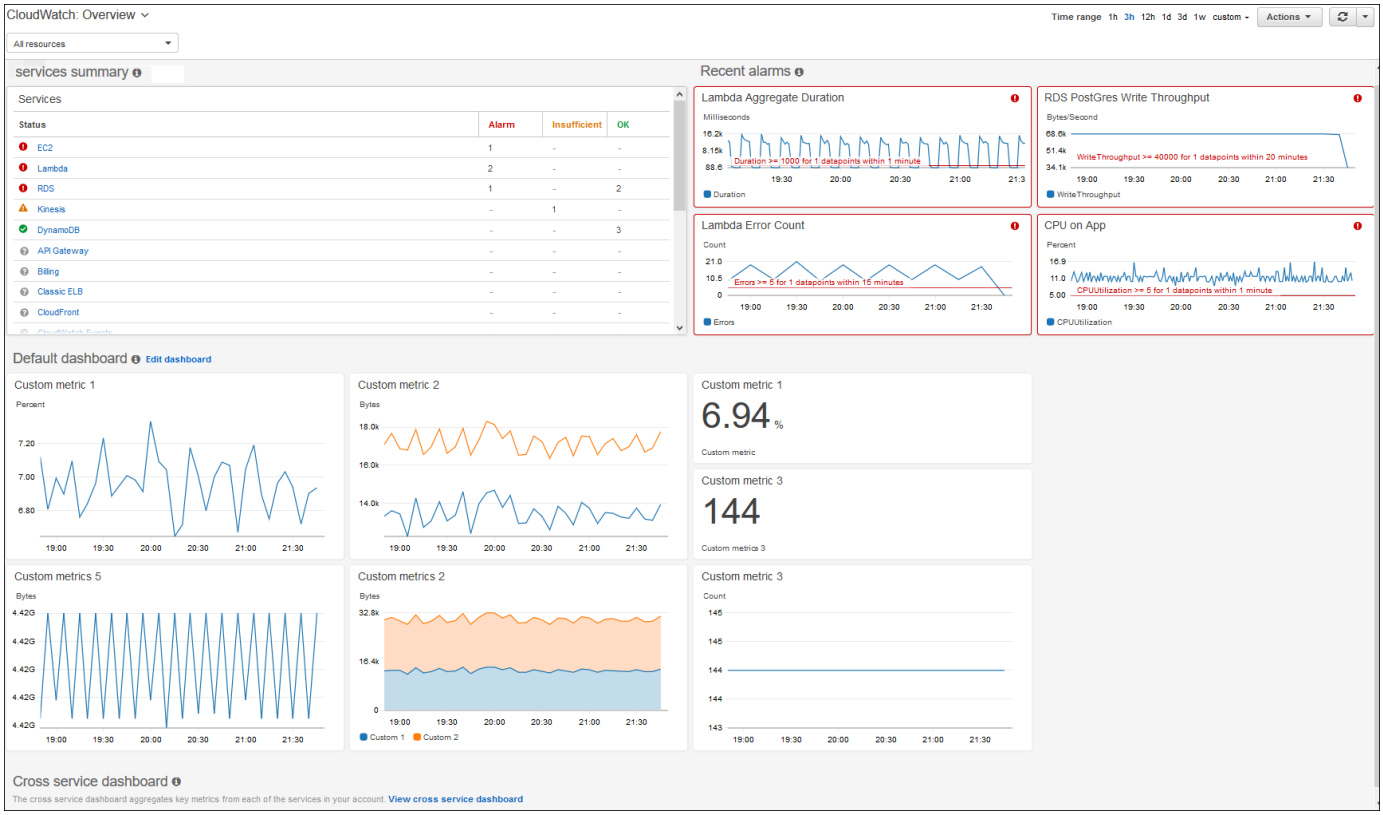


2. If necessary, change the Amazon Web Services Region. From the navigation bar, choose the Amazon Web Services Region where your Amazon resources are. For more information, see Regions and endpoints.

3. In the navigation pane, choose **Metrics** and then **All metrics**.

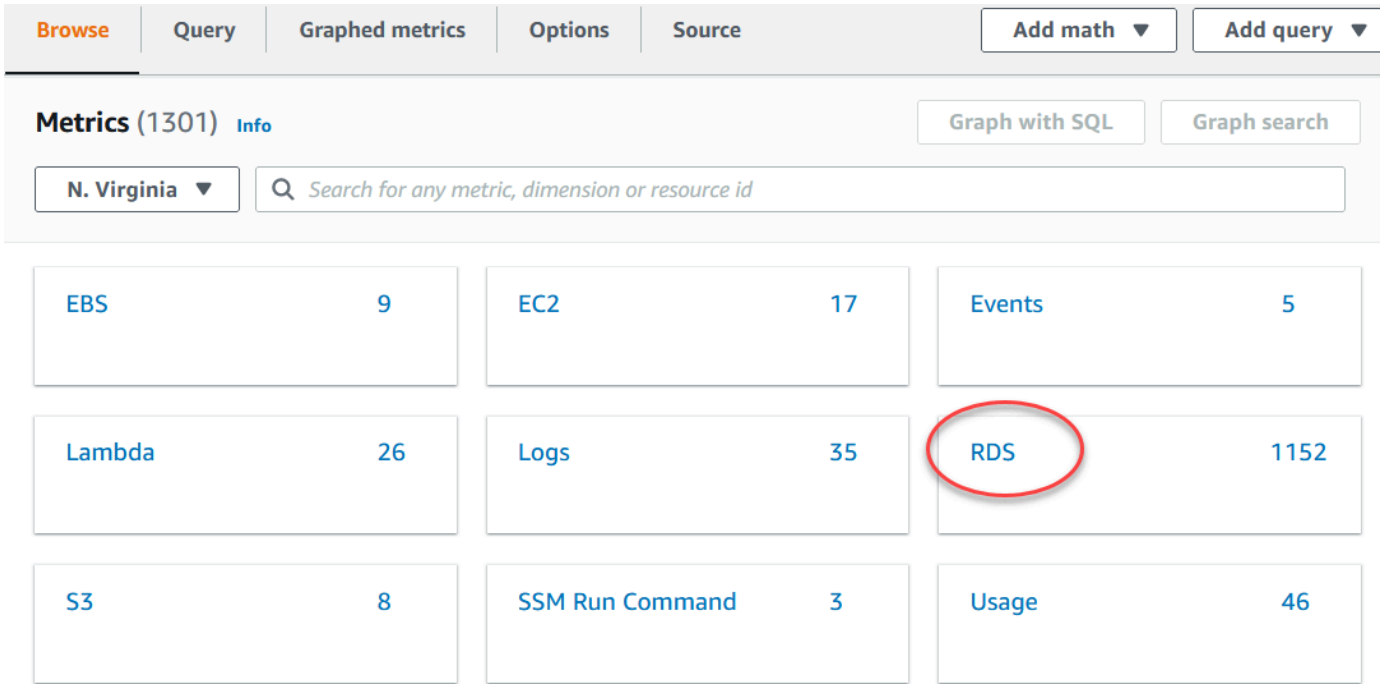


4. Scroll down and choose the **RDS** metric namespace.

   The page displays the Amazon Aurora dimensions. For descriptions of these dimensions, see [Amazon CloudWatch dimensions for Aurora].

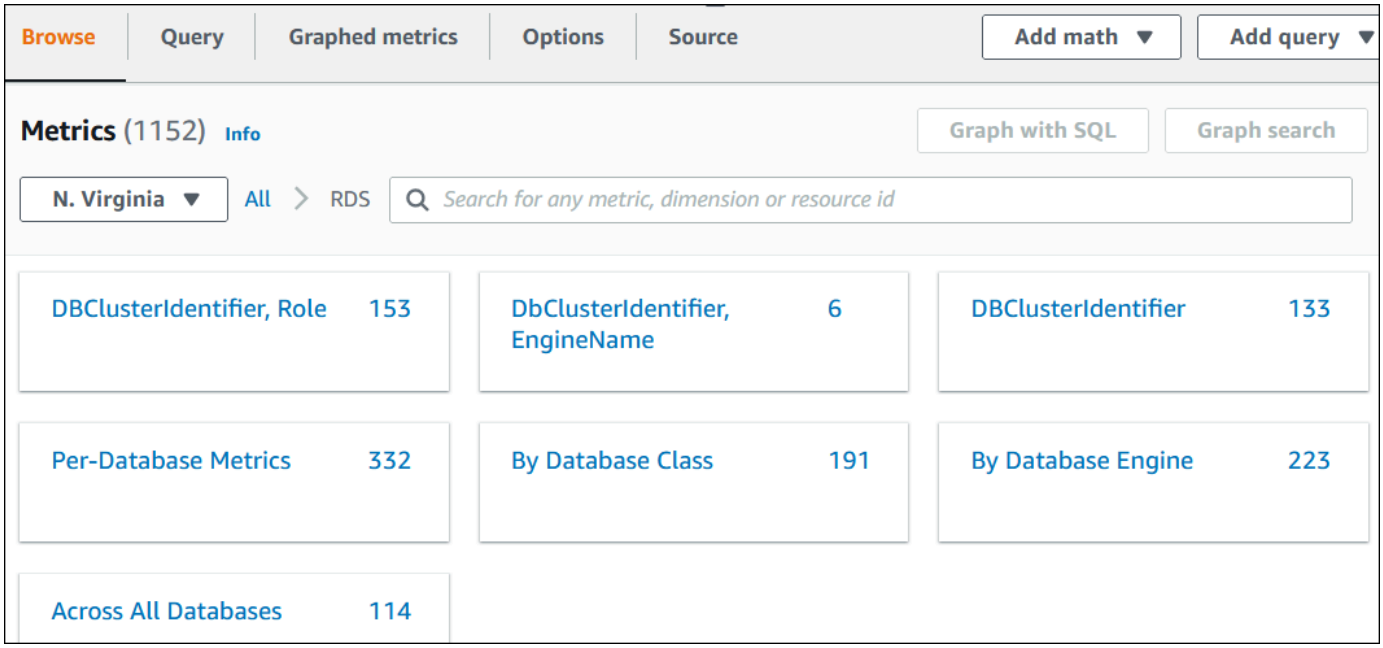


5. Choose a metric dimension, for example **By Database Class**.

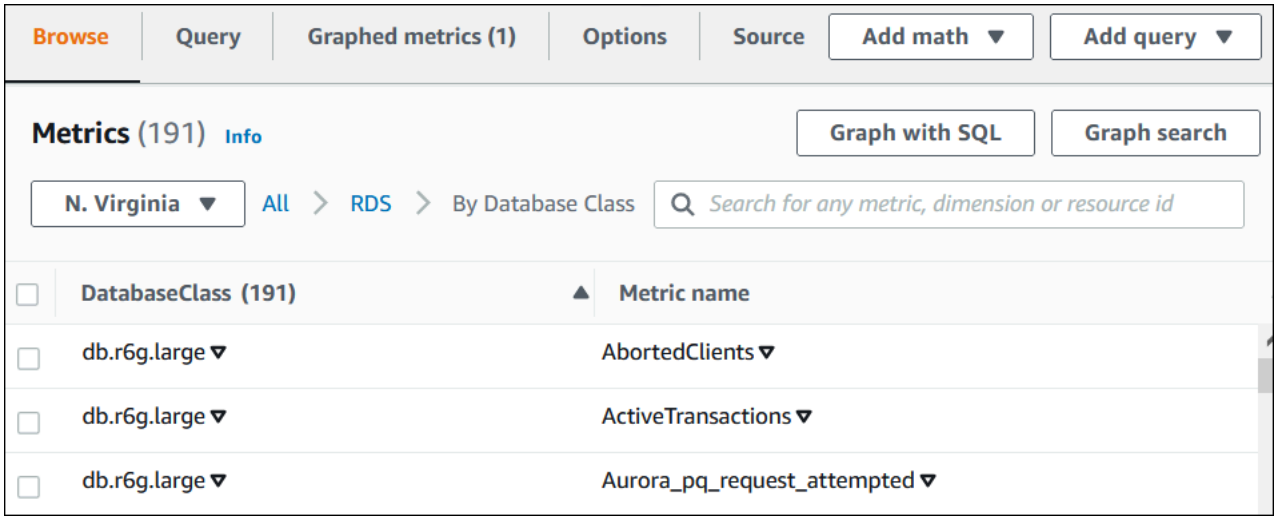

6. Do any of the following actions:

   - To sort the metrics, use the column heading.
   - To graph a metric, select the check box next to the metric.
   - To filter by resource, choose the resource ID, and then choose **Add to search**.
   - To filter by metric, choose the metric name, and then choose **Add to search**.

   The following example filters on the **db.t3.medium** class and graphs the **CPUUtilization** metric.

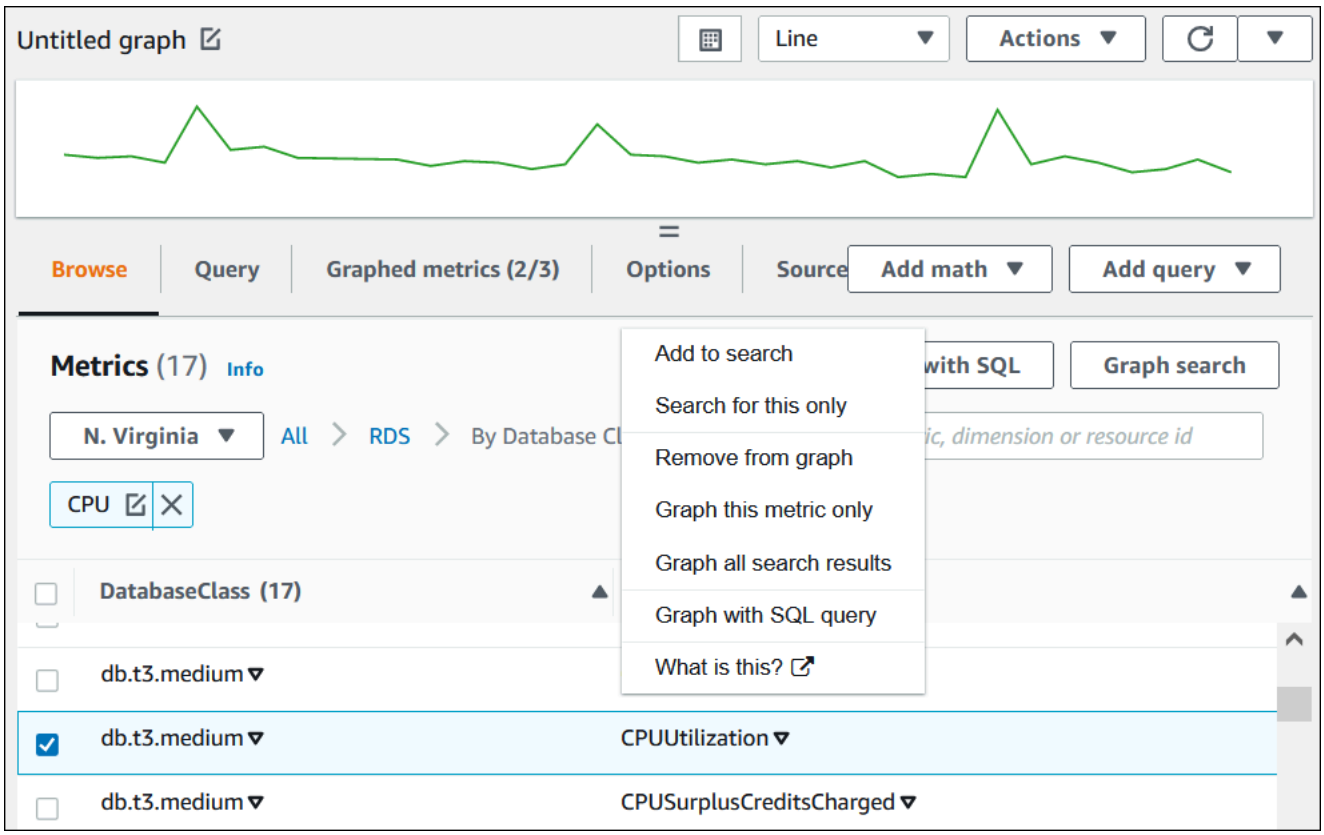

You can find details about how to analyze resource usage for Aurora PostgreSQL using CloudWatch metrics. For more information, see [Using Amazon CloudWatch metrics to analyze resource usage for Aurora PostgreSQL]

Amazon CLI

To obtain metric information by using the Amazon CLI, use the CloudWatch command `list-metrics`. In the following example, you list all metrics in the `AWS/RDS` namespace.

```
aws cloudwatch list-metrics --namespace AWS/RDS
```

To obtain metric data, use the command `get-metric-data`.

The following example gets `CPUUtilization` statistics for instance `my-instance` over the specific 24-hour period, with a 5-minute granularity.

Create a JSON file `CPU_metric.json` with the following contents.

```
{
   "StartTime" : "2023-12-25T00:00:00Z",
```

```
   "EndTime" : "2023-12-26T00:00:00Z",
   "MetricDataQueries" : [{
     "Id" : "cpu",
     "MetricStat" : {
    "Metric" : {
        "Namespace" : "AWS/RDS",
        "MetricName" : "CPUUtilization",
        "Dimensions" : [{ "Name" : "DBInstanceIdentifier" , "Value" : my-instance}]
    },
       "Period" : 360,
       "Stat" : "Minimum"
     }
   }]
}
```

Example

For Linux, macOS, or Unix:

```
aws cloudwatch get-metric-data \
    --cli-input-json file://CPU_metric.json
```

For Windows:

```
aws cloudwatch get-metric-data ^
     --cli-input-json file://CPU_metric.json
```

Sample output appears as follows:

```
{
    "MetricDataResults": [
        {
            "Id": "cpu",
            "Label": "CPUUtilization",
            "Timestamps": [
                "2023-12-15T23:48:00+00:00",
                "2023-12-15T23:42:00+00:00",
                "2023-12-15T23:30:00+00:00",
                "2023-12-15T23:24:00+00:00",
                ...
            ],
            "Values": [
```

```
                13.299778337027714,
                13.677507543049558,
                14.24976250395827,
                13.02521708695145,
                ...
            ],
            "StatusCode": "Complete"
        }
    ],
    "Messages": []
}
```

For more information, see Getting statistics for a metric in the *Amazon CloudWatch User Guide*.

Creating CloudWatch alarms to monitor Amazon Aurora

You can create a CloudWatch alarm that sends an Amazon SNS message when the alarm changes state. An alarm watches a single metric over a time period that you specify. The alarm can also perform one or more actions based on the value of the metric relative to a given threshold over a number of time periods. The action is a notification sent to an Amazon SNS topic or Amazon EC2 Auto Scaling policy.

Alarms invoke actions for sustained state changes only. CloudWatch alarms don't invoke actions simply because they are in a particular state. The state must have changed and have been maintained for a specified number of time periods.

> **Note**
>
> For Aurora, use `WRITER` or `READER` role metrics to set up alarms instead of relying on metrics for specific DB instances. Aurora DB instance roles can change roles over time. You can find these role-based metrics in the CloudWatch console.
> Aurora Auto Scaling automatically sets alarms based on `READER` role metrics. For more information about Aurora Auto Scaling, see Amazon Aurora Auto Scaling with Aurora Replicas.

You can use the **DB_PERF_INSIGHTS** metric math function in the CloudWatch console to query Amazon RDS for detailed per-query and database counter metrics, which are exposed through the Performance Insights API. The **DB_PERF_INSIGHTS** function also includes the DBLoad metric at sub-minute intervals. You can set CloudWatch alarms on these metrics.

For more details on how to create an alarm, see Create an alarm on Performance Insights counter metrics from an Amazon database.

To set an alarm using the Amazon CLI

- Call `put-metric-alarm`. For more information, see *Amazon CLI Command Reference*.

To set an alarm using the CloudWatch API

- Call `PutMetricAlarm`. For more information, see *Amazon CloudWatch API Reference*

For more information about setting up Amazon SNS topics and creating alarms, see Using Amazon CloudWatch alarms.

Monitoring Amazon Aurora databases with CloudWatch Database Insights

Monitor the database load (DB Load) for your fleet of Amazon Aurora DB instances with Database Insights. DB Load measures the level of session activity in your database. You can use Database Insights to analyze and troubleshoot the performance of your Amazon Aurora databases at scale.

With Database Insights, you can visualize the DB Load on your fleet of databases and filter the load by waits, SQL statements, hosts, or users.

By default, RDS enables the Standard mode of Database Insights for your Amazon Aurora databases. When you turn on the Advanced mode of Database Insights for a DB cluster, RDS enables Database Insights for every DB instance in the cluster.

For information about using Database Insights in the Amazon CloudWatch console, see CloudWatch Database Insights in the *Amazon CloudWatch User Guide*.

Pricing

For information about pricing, see Amazon CloudWatch Pricing.

Topics

- Amazon Aurora DB engine, Region, and instance class support for Database Insights
- Turning on the Advanced mode of Database Insights for Amazon Aurora
- Turning on the Standard mode of Database Insights for Amazon Aurora
- Configuring your database to monitor slow SQL queries with Database Insights for Amazon Aurora
- Considerations for Database Insights for Amazon Aurora
- Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora

Amazon Aurora DB engine, Region, and instance class support for Database Insights

The following table provides Amazon Aurora DB engines that support Database Insights.

Amazon Aurora DB engine	Supported engine versions and Regions	Instance class restrictions
Amazon Aurora MySQL-Compatible Edition	For more information on version and Region availability of Database Insights with Aurora MySQL, see Database Insights with Aurora MySQL.	Database Insights has the following engine class restrictions: • db.t2 – Not supported • db.t3 – Not supported • db.t4g.micro and db.t4g.small – Not supported
Amazon Aurora PostgreSQL-Compatible Edition	For more information on version and Region availability of Database Insights with Aurora PostgreSQL, see Database Insights with Aurora PostgreSQL.	Not applicable
Aurora PostgreSQL Limitless Database	For more information about using Database Insights with Aurora PostgreSQL Limitless Database, see Monitoring Aurora PostgreSQL Limitless Database with CloudWatch Database Insights.	Not applicable

Database Insights supports Amazon Aurora serverless.

Amazon Aurora DB engine, Region, and instance class support for Database Insights features

The following table provides Amazon Aurora DB engines that support Database Insights features.

Feature	Pricing tier	Supported regions	Supported DB engines	Supported instance classes
SQL statistics for Performance Insights	All	All	All	All
Analyzing database performance for a period of time	Paid tier only	All	All	All except db.serverless (Aurora serverless)
Viewing Database Insights proactive recommendations	Paid tier only	• US East (Ohio) • US East (N. Virginia) • US West (N. California) • US West (Oregon) • Asia Pacific (Mumbai) • Asia Pacific (Seoul) • Asia Pacific (Singapore) • Asia Pacific (Sydney) • Asia Pacific (Tokyo) • Canada (Central) • Europe (Frankfurt)	All	All except db.serverless (Aurora serverless)

Feature	Pricing tier	Supported regions	Supported DB engines	Supported instance classes
		• Europe (Ireland) • Europe (London) • Europe (Paris) • Europe (Stockholm) • South America (São Paulo)		

Amazon Aurora Region support for Database Insights

Aurora supports Database Insights in the following Amazon Web Services Regions.

- US East (N. Virginia)
- US East (Ohio)
- US West (N. California)
- US West (Oregon)
- Africa (Cape Town)
- Asia Pacific (Hong Kong)
- Asia Pacific (Hyderabad)
- Asia Pacific (Jakarta)
- Asia Pacific (Malaysia)
- Asia Pacific (Melbourne)
- Asia Pacific (Mumbai)
- Asia Pacific (Osaka)
- Asia Pacific (Seoul)
- Asia Pacific (Singapore)
- Asia Pacific (Sydney)

- Asia Pacific (Tokyo)
- Canada (Central)
- Canada West (Calgary)
- Europe (Frankfurt)
- Europe (Ireland)
- Europe (London)
- Europe (Milan)
- Europe (Paris)
- Europe (Spain)
- Europe (Stockholm)
- Europe (Zurich)
- Israel (Tel Aviv)
- Middle East (Bahrain)
- Middle East (UAE)
- South America (São Paulo)
- Amazon GovCloud (US-East)
- Amazon GovCloud (US-West)

Turning on the Advanced mode of Database Insights for Amazon Aurora

To turn on the Advanced mode of Database Insights for Amazon Aurora, use the following procedures.

Turning on the Advanced mode of Database Insights when creating a DB cluster

Turn on the Advanced mode of Database Insights when creating a database for Amazon Aurora.

Console

In the console, you can turn on the Advanced mode of Database Insights when you create a DB cluster. Settings for Database Insights apply to all DB instances in your DB cluster.

To turn on the Advanced mode of Database Insights when creating a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose **Create database**.
4. In the **Database Insights** section, select **Advanced mode**. Then, choose the following options:
   - **Retention** – The amount of time to retain Performance Insights data. The retention period must be 15 months for the Advanced mode of Database Insights.
   - **Amazon KMS key** – Specify your KMS key. Performance Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Encrypting Amazon Aurora resources.
5. Choose **Create database**.

Amazon CLI

To turn on the Advanced mode of Database Insights when creating a DB cluster, call the create-db-cluster Amazon CLI command and supply the following values:

- `--database-insights-mode advanced` to turn on the Advanced mode of Database Insights.
- `--engine` – The database engine for the DB cluster.
- `--db-cluster-identifier` – The identifier for the DB cluster.
- `--enable-performance-insights` to turn on Performance Insights for Database Insights.
- `--performance-insights-retention-period` – The retention period for data for your DB cluster. To turn on Database Insights, the retention period must be at least 465 days.

The following example enables the Advanced mode of Database Insights when creating a DB cluster.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
```

```
    --database-insights-mode advanced \
    --engine aurora-postgresql \
    --db-cluster-identifier sample-db-identifier \
    --enable-performance-insights \
    --performance-insights-retention-period 465
```

For Windows:

```
aws rds create-db-cluster ^
    --database-insights-mode advanced ^
    --engine aurora-postgresql ^
    --db-cluster-identifier sample-db-identifier ^
    --enable-performance-insights ^
    --performance-insights-retention-period 465
```

RDS API

To turn on the Advanced mode of Database Insights when you create a DB cluster, specify the following parameters for your CreateDBCluster Amazon RDS API operation.

- `DatabaseInsightsMode` to `advanced`
- `EnablePerformanceInsights` to `True`
- `PerformanceInsightsRetentionPeriod` to at least 465 days

Turning on the Advanced mode of Database Insights when modifying a DB cluster

Turn on Database Insights when modifying a database for Amazon Aurora. Modifying a DB cluster to enable the Advanced mode of Database Insights doesn't cause downtime.

> **Note**
>
> To enable Database Insights, each DB instance in a DB cluster must have the same Performance Insights and Enhanced Monitoring settings.

Console

In the console, you can turn on the Advanced mode of Database Insights when you modify a DB cluster. Settings for Database Insights apply to all DB instances in your DB cluster.

To turn on the Advanced mode of Database Insights when modifying a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose a DB cluster, and choose **Modify**.
4. In the **Database Insights** section, select **Advanced mode**. Then, choose the following options:
   - **Retention** – The amount of time to retain Performance Insights data. The retention period must be 15 months for the Advanced mode of Database Insights.
   - **Amazon KMS key** – Specify your KMS key. Performance Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Encrypting Amazon Aurora resources.
5. Choose **Continue**.
6. For **Scheduling of Modifications**, choose **Apply immediately**. If you choose **Apply during the next scheduled maintenance window**, your database ignores this setting and turns on the Advanced mode of Database Insights immediately.
7. Choose **Modify cluster**.

Amazon CLI

To turn on the Advanced mode of Database Insights when modifying a DB cluster, call the modify-db-cluster Amazon CLI command and supply the following values:

- `--database-insights-mode advanced` to turn on the Advanced mode of Database Insights.
- `--db-cluster-identifier` – The identifier for the DB cluster.
- `--enable-performance-insights` to turn on Performance Insights for Database Insights.
- `--performance-insights-retention-period` – The retention period for data for your DB cluster. To turn on the Advanced mode of Database Insights, the retention period must be at least 465 days.

The following example enables the Advanced mode of Database Insights when modifying a DB cluster.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --database-insights-mode advanced \
    --db-cluster-identifier sample-db-identifier \
    --enable-performance-insights \
    --performance-insights-retention-period 465
```

For Windows:

```
aws rds modify-db-cluster ^
    --database-insights-mode advanced ^
    --db-cluster-identifier sample-db-identifier ^
    --enable-performance-insights ^
    --performance-insights-retention-period 465
```

RDS API

To turn on the Advanced mode of Database Insights when you modify a DB cluster, specify the following parameters for your ModifyDBCluster Amazon RDS API operation.

- `DatabaseInsightsMode` to `advanced`
- `EnablePerformanceInsights` to `True`
- `PerformanceInsightsRetentionPeriod` to at least 465 days

Turning on the Standard mode of Database Insights for Amazon Aurora

To turn on the Standard mode of Database Insights for Amazon Aurora, use the following procedures.

Turning on the Standard mode of Database Insights when creating a DB cluster

Turn on the Standard mode of Database Insights when creating a database for Amazon Aurora.

Console

In the console, you can turn on the Standard mode of Database Insights when you create a DB cluster. Settings for Database Insights apply to all DB instances in your DB cluster.

To turn on the Standard mode of Database Insights when creating a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose **Create database**.
4. In the **Database Insights** section, select **Standard mode**. Then, choose from the following options to turn Performance Insights on or off:
   - To turn off Performance Insights, deselect **Enable Performance Insights**.
   - To turn on Performance Insights, select **Enable Performance Insights**. To configure Performance Insights, specify the following options:
     - **Retention** – The amount of time to retain Performance Insights data. The retention period must be at least 7 days.
     - **Amazon KMS key** – Specify your KMS key. Performance Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Encrypting Amazon Aurora resources.
5. Choose **Create database**.

Amazon CLI

To turn on the Standard mode of Database Insights when creating a DB cluster, call the create-db-cluster Amazon CLI command and supply the following values:

- `--database-insights-mode standard` to turn on the Standard mode of Database Insights.
- `--engine` – The database engine for the DB cluster.
- `--db-cluster-identifier` – The identifier for the DB cluster.
- `--enable-performance-insights` or `--no-enable-performance-insights` to turn Performance Insights on or off. If you specify `--enable-performance-insights`, you must also specify the `--performance-insights-retention-period` – The retention period for data for your DB cluster. The retention period must be at least 7 days.

The following example enables the Standard mode of Database Insights and Performance Insights when creating a DB cluster.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
    --database-insights-mode standard \
    --engine aurora-postgresql \
    --db-cluster-identifier sample-db-identifier \
    --enable-performance-insights \
    --performance-insights-retention-period 7
```

For Windows:

```
aws rds create-db-cluster ^
    --database-insights-mode standard ^
    --engine aurora-postgresql ^
    --db-cluster-identifier sample-db-identifier ^
    --enable-performance-insights ^
    --performance-insights-retention-period 7
```

The following example enables the Standard mode of Database Insights and disables Performance Insights when creating a DB cluster.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
    --database-insights-mode standard \
    --engine aurora-postgresql \
    --db-cluster-identifier sample-db-identifier \
    --no-enable-performance-insights
```

For Windows:

```
aws rds create-db-cluster ^
    --database-insights-mode standard ^
    --engine aurora-postgresql ^
    --db-cluster-identifier sample-db-identifier ^
    --no-enable-performance-insights
```

RDS API

To turn on the Standard mode of Database Insights when you create a DB cluster, specify the following parameters for your CreateDBCluster Amazon RDS API operation.

- `DatabaseInsightsMode` to `standard`
- `EnablePerformanceInsights` to `True` or `False`. If you set `EnablePerformanceInsights` to `True`, you must set `PerformanceInsightsRetentionPeriod` to at least 7 days.

Turning on the Standard mode of Database Insights when modifying a DB cluster

Turn on Standard mode of Database Insights when modifying a database for Amazon Aurora. Modifying a DB cluster to enable the Standard mode of Database Insights doesn't cause downtime.

> **Note**
>
> To enable Database Insights, each DB instance in a DB cluster must have the same Performance Insights and Enhanced Monitoring settings.

Console

In the console, you can turn on the Standard mode of Database Insights when you modify a DB cluster. Settings for Database Insights apply to all DB instances in your DB cluster.

To turn on the Standard mode of Database Insights when modifying a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose a DB cluster, and choose **Modify**.
4. In the **Database Insights** section, select **Standard mode**. Then, choose from the following options:
   - To turn off Performance Insights, deselect **Enable Performance Insights**.

- To turn on Performance Insights, select **Enable Performance Insights**. To configure Performance Insights, specify the following options:
  - **Retention** – The amount of time to retain Performance Insights data. The retention period must be at least 7 days.
  - **Amazon KMS key** – Specify your KMS key. Performance Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Encrypting Amazon Aurora resources.

5. Choose **Continue**.
6. For **Scheduling of Modifications**, choose **Apply immediately**. If you choose **Apply during the next scheduled maintenance window**, your database ignores this setting and turns on the Standard mode of Database Insights immediately.
7. Choose **Modify cluster**.

Amazon CLI

To turn on the Standard mode of Database Insights when modifying a DB cluster, call the modify-db-cluster Amazon CLI command and supply the following values:

- `--database-insights-mode standard` to turn on the Standard mode of Database Insights.
- `--db-cluster-identifier` – The identifier for the DB cluster.
- `--enable-performance-insights` or `--no-enable-performance-insights` to turn Performance Insights on or off. If you specify `--enable-performance-insights`, you must also specify the `--performance-insights-retention-period` – The retention period for data for your DB cluster. The retention period must be at least 7 days.

The following example enables the Standard mode of Database Insights and enables Performance Insights when modifying a DB cluster.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --database-insights-mode standard \
    --db-cluster-identifier sample-db-identifier \
    --enable-performance-insights \
    --performance-insights-retention-period 7
```

For Windows:

```
aws rds modify-db-cluster ^
    --database-insights-mode standard ^
    --db-cluster-identifier sample-db-identifier ^
    --enable-performance-insights ^
    --performance-insights-retention-period 7
```

The following example enables the Standard mode of Database Insights and disables Performance Insights when modifying a DB cluster.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --database-insights-mode standard \
    --db-cluster-identifier sample-db-identifier \
    --no-enable-performance-insights
```

For Windows:

```
aws rds modify-db-cluster ^
    --database-insights-mode standard ^
    --db-cluster-identifier sample-db-identifier ^
    --no-enable-performance-insights
```

RDS API

To turn on the Standard mode of Database Insights when you modify a DB cluster, specify the following parameters for your ModifyDBCluster Amazon RDS API operation.

- `DatabaseInsightsMode` to `standard`
- `EnablePerformanceInsights` to `True` or `False`. If you set `EnablePerformanceInsights` to `True`, you must set `PerformanceInsightsRetentionPeriod` to at least 7 days.

Configuring your database to monitor slow SQL queries with Database Insights for Amazon Aurora

To monitor slow SQL queries for your database, you can use the **Slow SQL Queries** section in the Database Insights dashboard. Before configuring your database to monitor slow SQL queries, the **Slow SQL Queries** section is blank.

For more information about monitoring slow SQL queries in the Database Insights dashboard, see Viewing the Database Instance Dashboard for CloudWatch Database Insights in the *Amazon CloudWatch User Guide*.

To configure your database to monitor slow SQL queries with Database Insights, complete the following steps:

1. Enable log exports to CloudWatch Logs.
2. Create or modify the DB cluster parameter group for your DB cluster.

For information about configuring log exports, see Publishing database logs to Amazon CloudWatch Logs in the *Amazon Aurora User Guide*.

To create or modify your DB cluster parameter group, see the following topics.

- Creating a DB cluster parameter groupin Amazon Aurora
- Modifying parameters in a DB cluster parameter groupin Amazon Aurora

Amazon Aurora MySQL

To configure your Amazon Aurora MySQL DB cluster to monitor slow SQL queries, you can use the following parameter combination as an example:

- `slow_query_log` – set to `1`
- `long_query_time` – set to `1.0`
- `log_output` – set to `FILE`

This is one possible configuration. For a comprehensive guide to MySQL slow query log parameters and additional configuration options, see the MySQL documentation for the slow query log.

Amazon Aurora PostgreSQL

To configure your Amazon Aurora PostgreSQL DB cluster to monitor slow SQL queries, you can use the following parameter combination as an example. Note that setting these parameters might reduce the performance of your DB cluster.

- `log_min_duration_statement` – set to `1000`
- `log_statement` – set to none
- `log_destination` – set to `stderr`

This is one possible configuration. For a comprehensive guide to PostgreSQL logging parameters and additional configuration options, see the PostgreSQL documentation for logging configuration.

Note

For Aurora MySQL, you can configure the parameter `long_query_time` with 1-microsecond granularity. For example, you can set this parameter to `0.000001`. Depending on the amount of queries on the DB instance, the value of the parameter `long_query_time` can reduce performance. Start with the value `1.0`, and adjust it based on your workload. When you set this parameter to `0`, Database Insights logs all queries.

For information about Aurora MySQL and Aurora PostgreSQL logs, see the following.

- AuroraMySQL database log files
- Aurora PostgreSQL database log files

Considerations for Database Insights for Amazon Aurora

Following are considerations for Database Insights for Amazon Aurora.

- You can't manage Database Insights for a DB instance in a DB cluster.
- To enable the Advanced mode of Database Insights, you must enable Performance Insights and set the Performance Insights retention period to at least 465 days (15 months). There is no additional cost to set the Performance Insights retention period to 15 months besides the cost of

Database Insights. For information about pricing for Database Insights, see Amazon CloudWatch Pricing.

- To enable Database Insights, each DB instance in a DB cluster must have the same Performance Insights and Enhanced Monitoring settings.
- Modifying a DB cluster to enable either mode of Database Insights doesn't cause downtime.

Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora

Amazon CloudWatch Database Insights expands on existing Amazon Aurora monitoring features to illustrate and help you analyze your cluster performance. With the Amazon CloudWatch Database Insights dashboard, you can visualize the database load on your Amazon Aurora cluster load and filter the load by waits, SQL statements, hosts, or users.

For information about using Performance Insights with Amazon DocumentDB, see *Amazon DocumentDB Developer Guide*.

Topics

- Overview of Database Insights on Amazon Aurora
- Enabling and disabling detailed per-query and database counter metrics
- Overview of the Performance Schema for Database Insights in Aurora MySQL
- Configuring access policies for Database Insights
- Viewing Database Insights proactive recommendations
- Retrieving metrics with the Performance Insights API for Aurora
- Logging Performance Insights calls using Amazon CloudTrail
- Performance Insights API and interface VPC endpoints (Amazon PrivateLink)

Overview of Database Insights on Amazon Aurora

By default, RDS enables Database Insights in Advanced mode, which includes lock diagnostics, execution plan capture, and fleet-level monitoring.

Topics

- Database load
- Maximum CPU

- Pricing and data retention for Database Insights

Database load

Database load (DB load) measures the level of session activity in your database. DBLoad is the key metric in Database Insights, and Database Insights collects DB load every second.

Topics

- Active sessions
- Average active sessions
- Average active executions
- Dimensions

Active sessions

A *database session* represents an application's dialogue with a relational database. An *active session* is a connection that has submitted work to the DB engine and is waiting for a response.

A session is active when it's either running on CPU or waiting for a resource to become available so that it can proceed. For example, an active session might wait for a page (or block) to be read into memory, and then consume CPU while it reads data from the page.

Average active sessions

The *average active sessions (AAS)* is the unit for the DBLoad metric in Database Insights. It measures how many sessions are concurrently active on the database.

Every second, Database Insights samples the number of sessions concurrently running a query. For each active session, Database Insights collects the following data:

- SQL statement
- Session state (running on CPU or waiting)
- Host
- User running the SQL

Database Insights calculates the AAS by dividing the total number of sessions by the number of samples for a specific time period. For example, the following table shows 5 consecutive samples of a running query taken at 1-second intervals.

Sample	Number of sessions running query	AAS	Calculation
1	2	2	2 total sessions / 1 sample
2	0	1	2 total sessions / 2 samples
3	4	2	6 total sessions / 3 samples
4	0	1.5	6 total sessions / 4 samples
5	4	2	10 total sessions / 5 samples

In the preceding example, the DB load for the time interval was 2 AAS. This measurement means that, on average, 2 sessions were active at any given time during the interval when the 5 samples were taken.

Average active executions

The *average active executions (AAE)* per second is related to AAS. To calculate the AAE, Database Insights divides the total execution time of a query by the time interval. The following table shows the AAE calculation for the same query in the preceding table.

Elapsed time (sec)	Total execution time (sec)	AAE	Calculation
60	120	2	120 execution seconds/60 elapsed seconds
120	120	1	120 execution seconds/120 elapsed seconds
180	380	2.11	380 execution seconds/180 elapsed seconds

Elapsed time (sec)	Total execution time (sec)	AAE	Calculation
240	380	1.58	380 execution seconds/240 elapsed seconds
300	600	2	600 execution seconds/300 elapsed seconds

In most cases, the AAS and AAE for a query are approximately the same. However, because the inputs to the calculations are different data sources, the calculations often vary slightly.

Dimensions

The `db.load` metric is different from the other time-series metrics because you can break it into subcomponents called *dimensions*. You can think of dimensions as "slice by" categories for the different characteristics of the `DBLoad` metric.

When you are diagnosing performance issues, the following dimensions are often the most useful:

Topics

- Wait events
- Top SQL

For a complete list of dimensions for the Aurora engines, see Database Insights.

Wait events

A *wait event* causes a SQL statement to wait for a specific event to happen before it can continue running. Wait events are an important dimension, or category, for DB load because they indicate where work is impeded.

Every active session is either running on the CPU or waiting. For example, sessions consume CPU when they search memory for a buffer, perform a calculation, or run procedural code. When sessions aren't consuming CPU, they might be waiting for a memory buffer to become free, a data

file to be read, or a log to be written to. The more time that a session waits for resources, the less time it runs on the CPU.

When you tune a database, you often try to find out the resources that sessions are waiting for. For example, two or three wait events might account for 90 percent of DB load. This measure means that, on average, active sessions are spending most of their time waiting for a small number of resources. If you can find out the cause of these waits, you can attempt a solution.

Wait events vary by DB engine:

- For a list of the common wait events for Aurora MySQL, see Aurora MySQL wait events. To learn how to tune using these wait events, see Tuning Aurora MySQL.
- For information about all MySQL wait events, see Wait Event Summary Tables in the MySQL documentation.
- For a list of common wait events for Aurora PostgreSQL, see Amazon Aurora PostgreSQL wait events. To learn how to tune using these wait events, see Tuning with wait events for Aurora PostgreSQL.
- For information about all PostgreSQL wait events, see The Statistics Collector > Wait Event tables in the PostgreSQL documentation.

Top SQL

Where wait events show bottlenecks, top SQL shows which queries are contributing the most to DB load. For example, many queries might be currently running on the database, but a single query might consume 99 percent of the DB load. In this case, the high load might indicate a problem with the query.

By default, the Database Insights console displays top SQL queries that are contributing to the database load. The console also shows relevant statistics for each statement. To diagnose performance problems for a specific statement, you can examine its execution plan.

Maximum CPU

In the dashboard, the **Database load** chart collects, aggregates, and displays session information. To see whether active sessions are exceeding the maximum CPU, look at their relationship to the **Max vCPU** line. Performance Insights determines the **Max vCPU** value by the number of vCPU (virtual CPU) cores for your DB instance. For Aurora serverless, **Max vCPU** represents the estimated number of vCPUs.


One process can run on a vCPU at a time. If the number of processes exceeds the number of vCPUs, the processes start queuing. When queuing increases, database performance decreases. If the DB load is often above the **Max vCPU** line, and the primary wait state is CPU, the CPU is overloaded. In this case, you might want to throttle connections to the instance, tune any SQL queries with a high CPU load, or consider a larger instance class. High and consistent instances of any wait state indicate that there might be bottlenecks or resource contention issues to resolve. This can be true even if the DB load doesn't cross the **Max vCPU** line.

Pricing and data retention for Database Insights

By default, Database Insights includes 7 days of performance data history and 1 million API requests per month. You can also purchase longer retention periods. For complete pricing information, see Database Insights Pricing.

In the RDS console, you can choose any of the following retention periods for your Database Insights data:

- **Default (7 days)**
- ***n*** **months**, where ***n*** is a number from 1–24

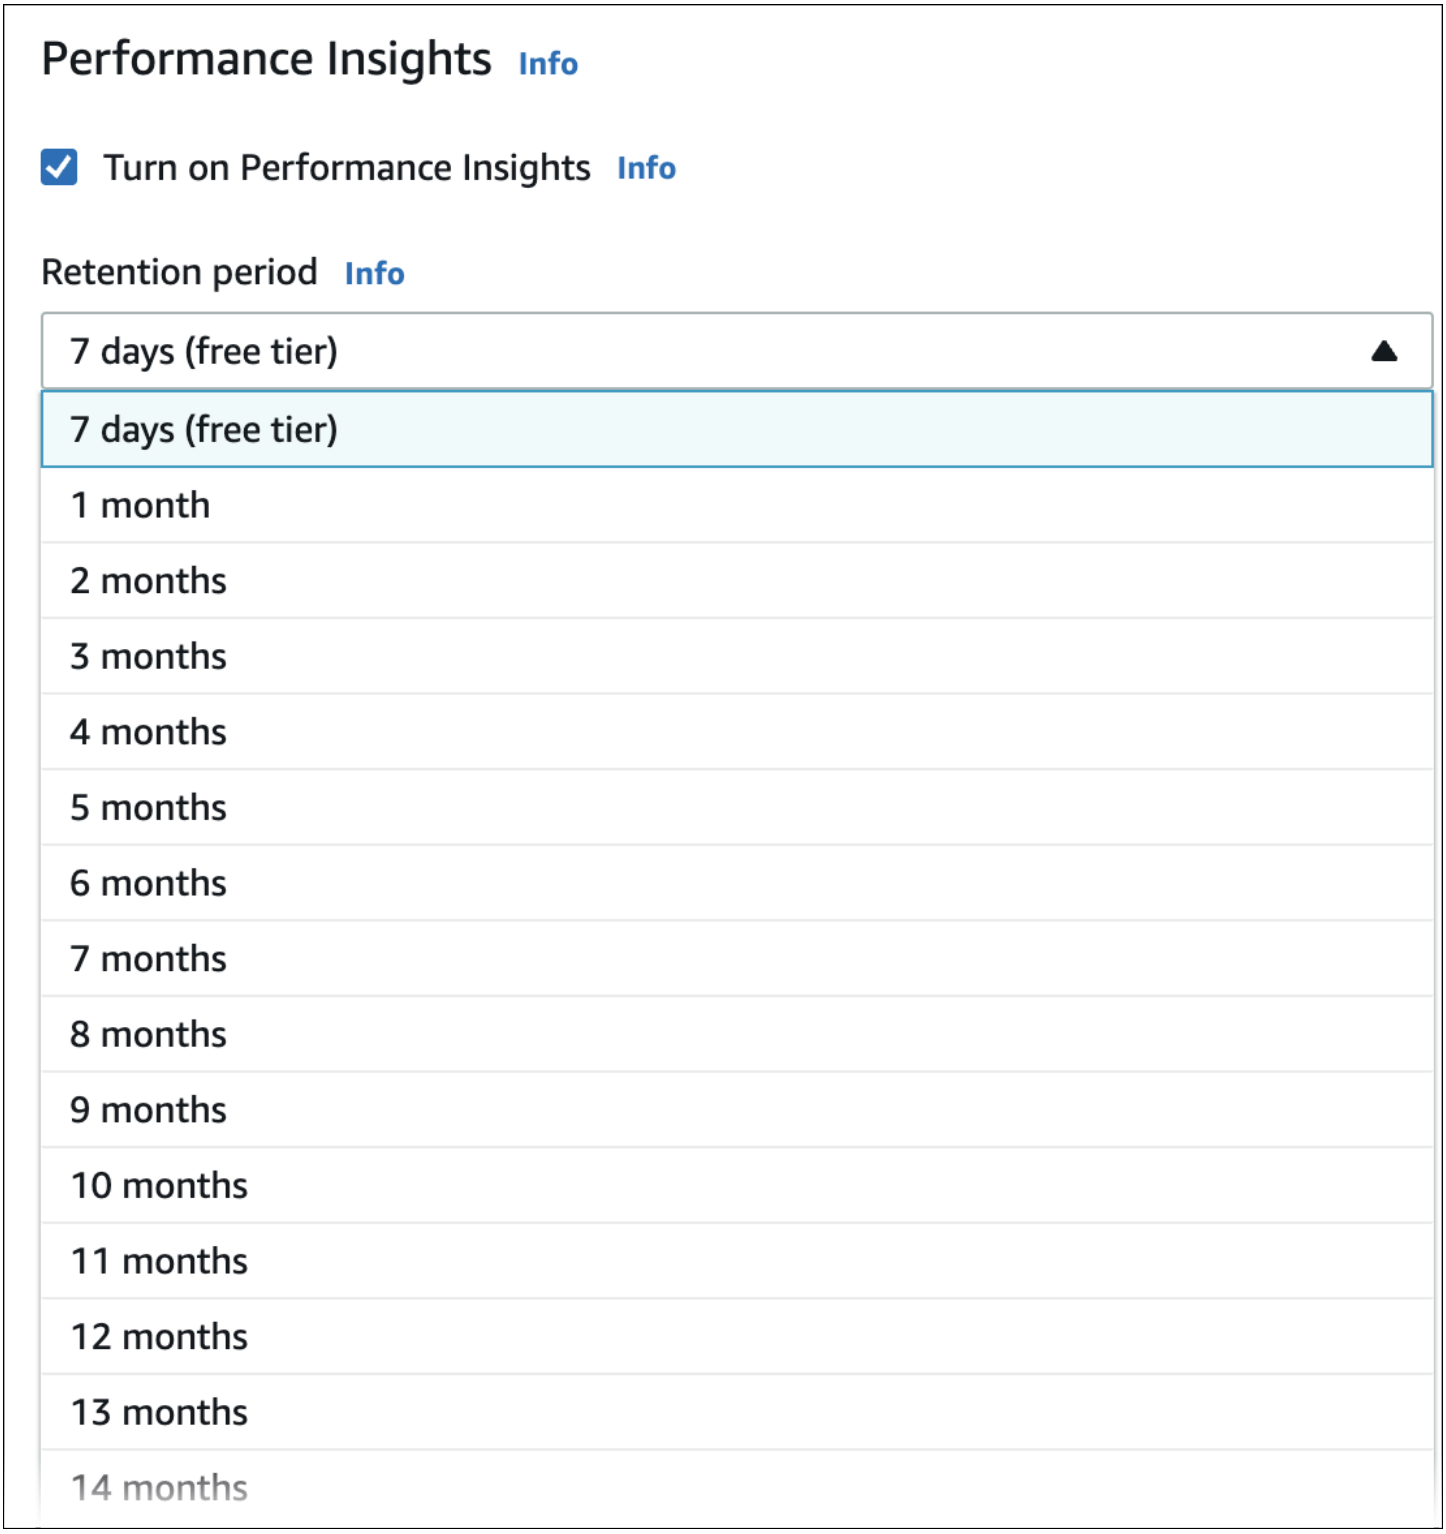

To learn how to set a retention period using the Amazon CLI, see Enabling and disabling detailed per-query and database counter metrics.

> **Note**
>
> Stopping a DB cluster with Database Insights enabled doesn't affect data retention. While a DB cluster is stopped, Database Insights won't collect any data.

Enabling and disabling detailed per-query and database counter metrics

Detailed per-query and database counter metrics are enabled by default when you select Database Insights Advanced mode. If you select Database Insights Standard mode, you can enable them when you create your DB cluster, and turn them off later by modifying your DB cluster from the console. Enabling detailed per-query and database counter metrics doesn't cause downtime, a reboot, or a failover.

> **Note**
>
> Performance Schema is an optional performance tool used by Aurora MySQL. If you turn Performance Schema on or off, you need to reboot. If you enable or disable detailed per-query and database counter metrics, however, you don't need to reboot. For more information, see Overview of the Performance Schema for Database Insights in Aurora MySQL.

If you use detailed per-query and database counter metrics with Aurora global databases, turn them on individually for the databases in each Amazon Web Services Region. For details, see Monitoring an Amazon Aurora global database with Amazon RDS Performance Insights.

The Database Insights agent consumes limited CPU and memory on the DB host. When the DB load is high, the agent limits the performance impact by collecting data less frequently.

Console


In the console, you can enable collecting detailed per-query and database counter metrics for Database Insights Standard mode when you create or modify a DB cluster. Enabling detailed per-query and database counter metrics allows you to manage Database Insights settings and options for your DB cluster. Cluster level settings apply to all DB instances in the cluster.

Enabling or disabling detailed per-query and database counter metrics when creating a DB cluster

After creating a new DB cluster, Amazon RDS enables detailed per-query and database counter metrics by default. To turn it off, choose the option **Database Insights – Standard** and deselect the option **Enable collecting detailed per-query and database counter metrics**.

To create a DB cluster, follow the instructions for your DB engine in Creating an Amazon Aurora DB cluster.

The following screenshot shows the **Database Insights** section.

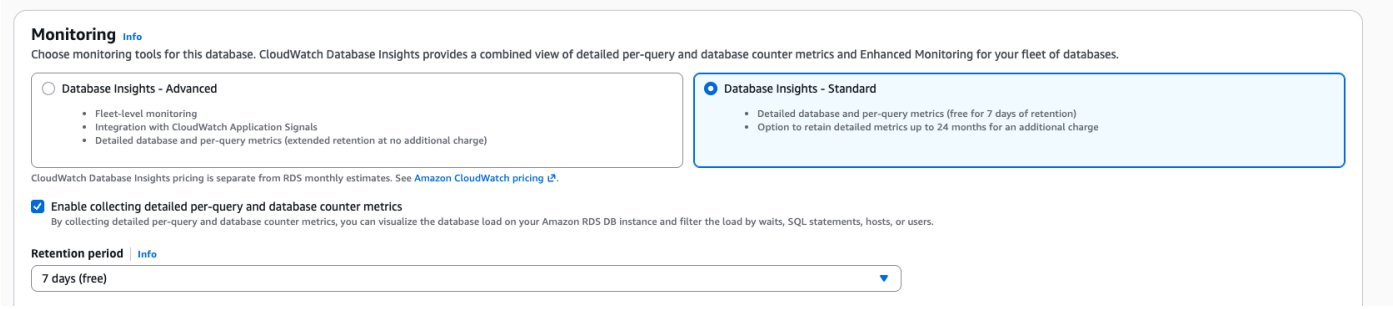

If you choose **Enable collecting detailed per-query and database counter metrics**, you have the following options:

- **Retention** – The amount of time to retain Database Insights data. The retention setting is **Default (7 days)**. To retain your performance data for longer, specify 1–24 months. For more information about retention periods, see Pricing and data retention for Database Insights.
- **Amazon KMS key** – Specify your Amazon KMS key. Database Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Changing an KMS key policy for Database Insights.

Enabling or disabling detailed per-query and database counter metrics when modifying a DB cluster

In the console, you can modify a DB cluster to manage detailed per-query and database counter metrics for Database Insights.


To manage detailed per-query and database counter metrics for a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.

3. Choose a DB cluster, and choose **Modify**.
4. Select **Enable collecting detailed per-query and database counter metrics** to enable it. To turn it off for your DB cluster, choose the option **Database Insights – Standard** and deselect the option **Enable collecting detailed per-query and database counter metrics**.

   If you choose **Enable collecting detailed per-query and database counter metrics**, you have the following options:

   - **Retention** – The amount of time to retain Database Insights data. The retention setting is **Default (7 days)**. To retain your performance data for longer, specify 1–24 months. For more information about retention periods, see Pricing and data retention for Database Insights.
   - **Amazon KMS key** – Specify your KMS key. Database Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Encrypting Amazon Aurora resources.

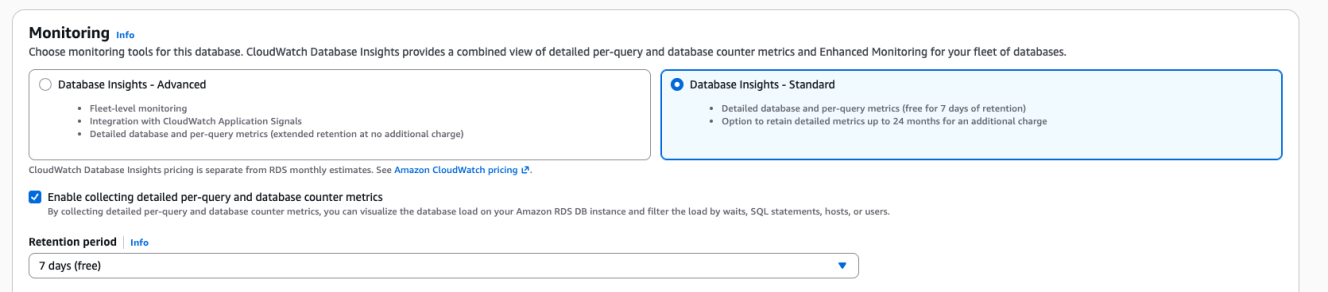

5. Choose **Continue**.
6. For **Scheduling of Modifications**, choose Apply immediately. If you choose Apply during the next scheduled maintenance window, your instance ignores this setting and turns on collecting detailed per-query and database counter metrics immediately.
7. Choose **Modify instance**.

Amazon CLI

When you use the create-db-instance Amazon CLI command, turn on detailed per-query and database counter metrics by specifying `--enable-performance-insights` and set `--database-insights-mode` to either `advanced` or `standard`. To turn them off, specify `--no-enable-performance-insights` and set `database-insights-mode` to `standard`.

You can also specify these values using the following Amazon CLI commands:

- create-db-cluster
- modify-db-cluster
- create-db-instance-read-replica
- modify-db-instance
- restore-db-instance-from-s3

To manage detailed per-query and database counter metrics for a DB cluster using the Amazon CLI

- Call the modify-db-cluster Amazon CLI command and supply the following values:
  - `--db-cluster-identifier` – The name of the DB instance in your DB cluster.
  - `--enable-performance-insights` to turn on or `--no-enable-performance-insights` to turn off
  - `database-insights-mode` – The mode of Database Insights for the DB cluster. To turn off detailed per-query and database counter metrics, set this value to `standard`.

  The following example turns on detailed per-query and database counter metrics for `sample-db-cluster`.

  For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
 --database-insights-mode standard \
    --db-cluster-identifier sample-db-instance \
    --enable-performance-insights
```

  For Windows:

```
aws rds modify-db-cluster ^
 --database-insights-mode standard ^
    --db-cluster-identifier sample-db-instance ^
    --enable-performance-insights
```

When you turn on detailed per-query and database counter metrics in the CLI, you can optionally specify the number of days to retain the data with the `--performance-insights-`

`retention-period` option. You can specify 7, *`month`* * 31 (where *`month`* is a number from 1–23), or 731. For example, if you want to retain your performance data for 3 months, specify 93, which is 3 * 31. The default is 7 days. For more information about retention periods, see Pricing and data retention for Database Insights.

The following example turns on detailed per-query and database counter metrics for `sample-db-cluster` and specifies that the data is retained for 93 days (3 months).

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
 --database-insights-mode standard \
    --db-cluster-identifier sample-db-instance \
    --enable-performance-insights \
    --performance-insights-retention-period 93
```

For Windows:

```
aws rds modify-db-cluster ^
 --database-insights-mode standard ^
    --db-cluster-identifier sample-db-instance ^
    --enable-performance-insights ^
    --performance-insights-retention-period 93
```

If you specify a retention period such as 94 days, which isn't a valid value, RDS issues an error.

```
An error occurred (InvalidParameterValue) when calling the CreateDBInstance
 operation:
Invalid Performance Insights retention period. Valid values are: [7, 31, 62, 93,
 124, 155, 186, 217,
248, 279, 310, 341, 372, 403, 434, 465, 496, 527, 558, 589, 620, 651, 682, 713, 731]
```

> **Note**
>
> You can only toggle detailed per-query and database counter metrics for an instance in a DB cluster where they are not managed at the cluster level.

RDS API

When you create a new DB instance in your DB cluster using the CreateDBInstance operation Amazon RDS API operation, turn on detailed per-query and database counter metrics by setting `EnablePerformanceInsights` to `True`. To turn them off, set `EnablePerformanceInsights` to `False` and set `DatabaseInsightsMode` to `standard`.

You can also specify the `EnablePerformanceInsights` value using the following API operations:

- CreateDBCluster
- ModifyDBCluster
- ModifyDBInstance
- CreateDBInstanceReadReplica
- RestoreDBInstanceFromS3

When you turn on detailed per-query and database counter metrics, you can optionally specify the amount of time, in days, to retain the data with the `PerformanceInsightsRetentionPeriod` parameter. You can specify 7, *`month`* * 31 (where *`month`* is a number from 1–23), or 731. For example, if you want to retain your performance data for 3 months, specify 93, which is 3 * 31. The default is 7 days. For more information about retention periods, see Pricing and data retention for Database Insights.

Overview of the Performance Schema for Database Insights in Aurora MySQL

The Performance Schema is an optional feature for monitoring Aurora MySQL runtime performance at a low level of detail. The Performance Schema is designed to have minimal impact on database performance. Database Insights is a separate feature that you can use with or without the Performance Schema.

Topics

- Overview of the Performance Schema
- Database Insights and the Performance Schema
- Automatic management of the Performance Schema by Database Insights
- Effect of a reboot on the Performance Schema
- Determining whether Database Insights is managing the Performance Schema

- Turn on the Performance Schema for Aurora MySQL

Overview of the Performance Schema

The Performance Schema monitors events in Aurora MySQL databases. An *event* is a database server action that consumes time and has been instrumented so that timing information can be collected. Examples of events include the following:

- Function calls
- Waits for the operating system
- Stages of SQL execution
- Groups of SQL statements

The `PERFORMANCE_SCHEMA` storage engine is a mechanism for implementing the Performance Schema feature. This engine collects event data using instrumentation in the database source code. The engine stores events in memory-only tables in the `performance_schema` database. You can query `performance_schema` just as you can query any other tables. For more information, see MySQL Performance Schema in the *MySQL Reference Manual*.

Database Insights and the Performance Schema

Database Insights and the Performance Schema are separate features, but they are connected. The behavior of Database Insights for Aurora MySQL depends on whether the Performance Schema is turned on, and if so, whether Database Insights manages the Performance Schema automatically. The following table describes the behavior.

Performance Schema turned on	Database Insights management mode	Database Insights behavior
Yes	Automatic	• Collects detailed, low-level monitoring information • Collects active session metrics every second •

Performance Schema turned on	Database Insights management mode	Database Insights behavior
		Displays DB load categorized by detailed wait events, which you can use to identify bottlenecks
Yes	Manual	• Collects wait events and per-SQL metrics • Collects active session metrics every second • Reports user states such as inserting and sending, which don't help you identify bottlenecks
No	N/A	• Doesn't collect wait events, per-SQL metrics, or other detailed, low-level monitoring information • Collects active session metrics every five seconds instead of every second • Reports user states such as inserting and sending, which don't help you identify bottlenecks

Automatic management of the Performance Schema by Database Insights

When you create an Aurora MySQL DB instance with Database Insights turned on, the Performance Schema is also turned on. In this case, Database Insights automatically manages your Performance Schema parameters. This is the recommended configuration.

When Database Insights manages the Performance Schema automatically, the **Source** of `performance_schema` is `System default`.

> **Note**
>
> Automatic management of the Performance Schema isn't supported for the t4g.medium instance class.

You can also manage the Performance Schema manually. If you choose this option, set the parameters according to the values in the following table.

Parameter name	Parameter value
`performance_schema`	1 (**Source** column has the value `Modified`)
`performance-schema-consumer-events-waits-current`	`ON`
`performance-schema-instrument`	`wait/%=ON`
`performance_schema_consumer_global_instrumentation`	`1`
`performance_schema_consumer_thread_instrumentation`	`1`

If you change the `performance_schema` parameter value manually, and then later want to change to automatic management, see Turn on the Performance Schema for Aurora MySQL.

> **Important**
>
> When Database Insights turns on the Performance Schema, it doesn't change the parameter group values. However, the values are changed on the DB instances that are running. The only way to see the changed values is to run the `SHOW GLOBAL VARIABLES` command.

Effect of a reboot on the Performance Schema

Database Insights and the Performance Schema differ in their requirements for DB instance reboots:

Performance Schema

To turn this feature on or off, you must reboot the DB instance.

Database Insights

To turn this feature on or off, you don't need to reboot the DB instance.

If the Performance Schema isn't currently turned on, and you turn on Database Insights without rebooting the DB instance, the Performance Schema won't be turned on.

Determining whether Database Insights is managing the Performance Schema

To find out whether Database Insights is currently managing the Performance Schema for all supported major engine versions, review the following table.

Setting of performan ce_schema parameter	Setting of the Source column	Database Insights is managing the Performance Schema?
`0`	`System default`	Yes
`0` or `1`	`Modified`	No

In the following procedure, you determine whether Database Insights is managing the Performance Schema automatically.

To determine whether Database Insights is managing the Performance Schema automatically

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Parameter groups**.
3. Select the name of the parameter group for your DB instance.

4. Enter **`performance_schema`** in the search bar.
5. Check whether **Source** is the system default and **Value** is **0**. If so, Database Insights is managing the Performance Schema automatically.

   In the example shown here, Database Insights isn't managing the Performance Schema automatically.



Turn on the Performance Schema for Aurora MySQL

Assume that Database Insights is turned on for your DB instance but isn't currently managing the Performance Schema. If you want to allow Database Insights to manage the Performance Schema automatically, complete the following steps.

To configure the Performance Schema for automatic management

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Parameter groups**.
3. Select the name of the parameter group for your DB instance.
4. Choose **Edit**.
5. Enter **`performance_schema`** in the search bar.
6. Select the `performance_schema` parameter.
7. Choose **Set to default value**.
8. Confirm by choosing **Set values to default**.
9. Choose **Save Changes**.
10. Reboot the DB instance.

> **Important**
>
> Whenever you turn the Performance Schema on or off, make sure to reboot the DB instance.

For more information about modifying instance parameters, see Modifying parameters in a DB parameter group in Amazon Aurora. For more information about the dashboard, see Database Insights. For more information about the MySQL performance schema, see MySQL Performance Schema (for 8.0) and MySQL Performance Schema (for 8.4) in the MySQL documentation.

Configuring access policies for Database Insights

To access Database Insights, a principal must have the appropriate permissions from Amazon Identity and Access Management (IAM).

> **Note**
>
> To use Database Insights with a customer-managed key, grant users the `kms:Decrypt` and `kms:GenerateDataKey` permissions for your Amazon Amazon KMS key.

Access Database Insights using these methods:

- Attach the `AmazonRDSPerformanceInsightsReadOnly` managed policy for read-only access
- Attach the `AmazonRDSPerformanceInsightsFullAccess` managed policy for access to all operations of the Database Insights API
- Create a custom IAM policy with specific permissions
- Configure Amazon KMS permissions for encrypted Database Insights data
- Set up fine-grained access using resource-level permissions
- Use tag-based access control to manage permissions through resource tags

Attaching the AmazonRDSPerformanceInsightsReadOnly policy to an IAM principal

`AmazonRDSPerformanceInsightsReadOnly` is an Amazon managed policy that grants access to all read-only operations of the Amazon RDS Database Insights API.

If you attach `AmazonRDSPerformanceInsightsReadOnly` to a permission set or role, you must also attach the following CloudWatch permissions:

- `GetMetricStatistics`
- `ListMetrics`

- `GetMetricData`

With these permissions, the recipient can use Database Insights with other console features.

For more information about CloudWatch permissions, see Amazon CloudWatch permissions reference.

For more information about `AmazonRDSPerformanceInsightsReadOnly`, see Amazon managed policy: AmazonRDSPerformanceInsightsReadOnly.

Attaching the AmazonRDSPerformanceInsightsFullAccess policy to an IAM principal

`AmazonRDSPerformanceInsightsFullAccess` is an Amazon managed policy that grants access to all operations of the Amazon RDS Database Insights API.

If you attach `AmazonRDSPerformanceInsightsFullAccess` to a permission set or role, you must also attach the following CloudWatch permissions:

- `GetMetricStatistics`
- `ListMetrics`
- `GetMetricData`

With these permissions, the recipient can use Database Insights with other console features.

For more information about CloudWatch permissions, see Amazon CloudWatch permissions reference.

For more information about `AmazonRDSPerformanceInsightsFullAccess`, see Amazon managed policy: AmazonRDSPerformanceInsightsFullAccess.

Creating a custom IAM policy for Database Insights

For users who don't have either the `AmazonRDSPerformanceInsightsReadOnly` or `AmazonRDSPerformanceInsightsFullAccess` policy, you can grant access to Database Insights by creating or modifying a user-managed IAM policy. When you attach the policy to an IAM permission set or role, the recipient can use Database Insights.

To create a custom policy

1. Open the IAM console at https://console.amazonaws.cn/iam/.

2. In the navigation pane, choose **Policies**.
3. Choose **Create policy**.
4. On the **Create Policy** page, choose the **JSON** option.
5. Copy and paste the text provided in the *JSON policy document* section in the *Amazon Managed Policy Reference Guide* for AmazonRDSPerformanceInsightsReadOnly or AmazonRDSPerformanceInsightsFullAccess policy.
6. Choose **Review policy**.
7. Provide a name for the policy and optionally a description, and then choose **Create policy**.


You can now attach the policy to a permission set or role. The following procedure assumes that you already have a user available for this purpose.

To attach the policy to a user

1. Open the IAM console at https://console.amazonaws.cn/iam/.
2. In the navigation pane, choose **Users**.
3. Choose an existing user from the list.

> **Important**
>
> To use Database Insights, make sure that you have access to Amazon RDS in addition to the custom policy. For example, the `AmazonRDSPerformanceInsightsReadOnly` predefined policy provides read-only access to Amazon RDS. For more information, see Managing access using policies.

4. On the **Summary** page, choose **Add permissions**.
5. Choose **Attach existing policies directly**. For **Search**, type the first few characters of your policy name, as shown in the following image.

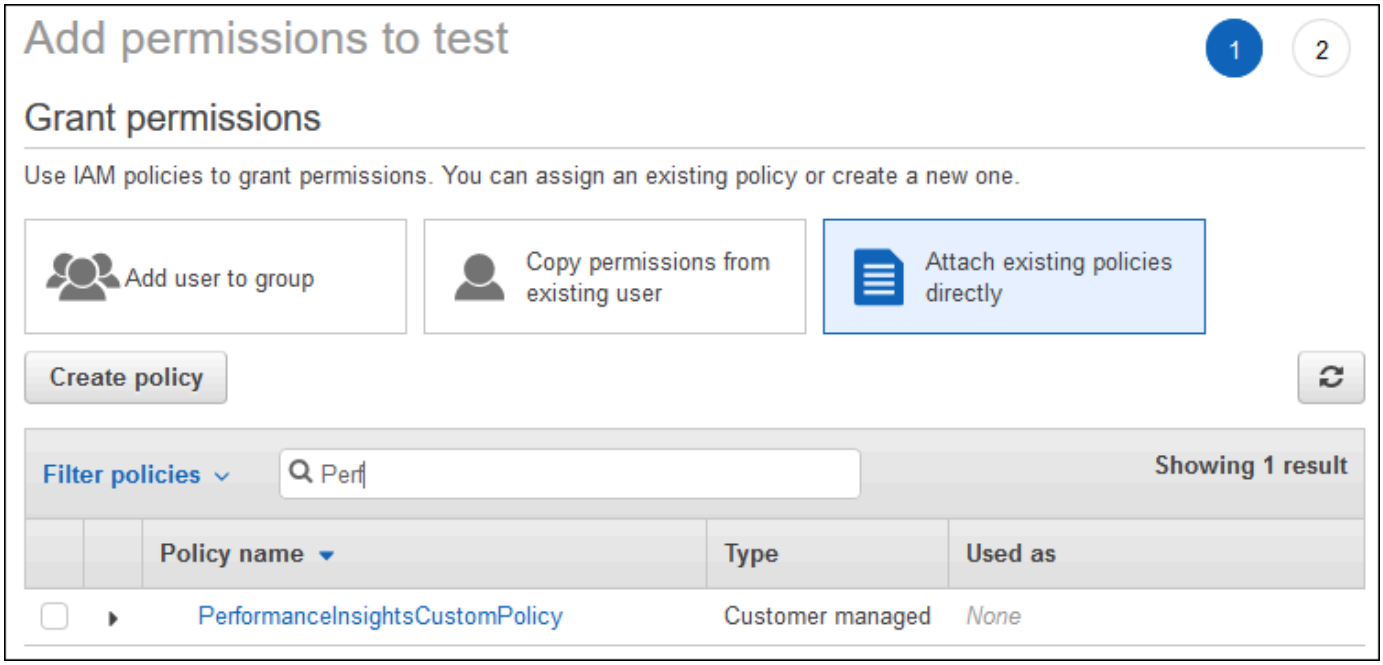

6. Choose your policy, and then choose **Next: Review**.
7. Choose **Add permissions**.

Changing an Amazon KMS policy for Database Insights

Database Insights uses an Amazon KMS key to encrypt sensitive data. When you enable Database Insights through the API or the console, you can do either of the following:

- Choose the default Amazon managed key.

  Amazon RDS uses the Amazon managed key for your new DB instance. Amazon RDS creates an Amazon managed key for your Amazon Web Services account. Your Amazon Web Services account has a different Amazon managed key for Amazon RDS for each Amazon Web Services Region.

- Choose a customer managed key.

  If you specify a customer managed key, users in your account that call the Database Insights API need the `kms:Decrypt` and `kms:GenerateDataKey` permissions on the KMS key. You can configure these permissions through IAM policies. However, we recommend that you manage these permissions through your KMS key policy. For more information, see Key policies in Amazon KMS in the *Amazon Key Management Service Developer Guide*.

Example

The following example shows how to add statements to your KMS key policy. These statements allow access to Database Insights. Depending on how you use the KMS key, you might want to change some restrictions. Before adding statements to your policy, remove all comments.

JSON

```
{
    "Version":"2012-10-17",
    "Id" : "your-policy",
    "Statement" : [
        {
            "Sid" : "AllowViewingRDSPerformanceInsights",
            "Effect": "Allow",
            "Principal": {
                "AWS": [
                    "arn:aws-cn:iam::444455556666:role/Role1"
                ]
                },
             "Action": [
                "kms:Decrypt",
                "kms:GenerateDataKey"
                ],
            "Resource": "*",
            "Condition" : {
            "StringEquals" : {
                "kms:ViaService" : "rds.us-east-1.amazonaws.com"
                },
            "ForAnyValue:StringEquals": {
                "kms:EncryptionContext:aws:pi:service": "rds",
                "kms:EncryptionContext:service": "pi",
                "kms:EncryptionContext:aws:rds:db-id": "db-
AAAAABBBBBCCCCDDDDDEEEEE"
                }
            }
        }
    ]
}
```

How Database Insights uses Amazon KMS customer managed key

Database Insights uses customer managed keys to encrypt sensitive data. When you turn on Database Insights, you can provide an Amazon KMS key through the API. Database Insights creates Amazon KMS permissions on this key. It uses the key and performs the necessary operations to process sensitive data. Sensitive data includes fields such as user, database, application, and SQL query text. Database Insights ensures that the data remains encrypted both at rest and in-flight.

How Database Insights IAM works with Amazon KMS

IAM gives permissions to specific APIs. Database Insights has the following public APIs, which you can restrict using IAM policies:

- `DescribeDimensionKeys`
- `GetDimensionKeyDetails`
- `GetResourceMetadata`
- `GetResourceMetrics`
- `ListAvailableResourceDimensions`
- `ListAvailableResourceMetrics`

You can use the following API requests to get sensitive data.

- `DescribeDimensionKeys`
- `GetDimensionKeyDetails`
- `GetResourceMetrics`

When you use the API to get sensitive data, Database Insights leverages the caller's credentials. This check ensures that access to sensitive data is limited to those with access to the KMS key.

When calling these APIs, you need permissions to call the API through the IAM policy and permissions to invoke the `kms:decrypt` action through the Amazon KMS key policy.

The `GetResourceMetrics` API can return both sensitive and non-sensitive data. The request parameters determine whether the response should include sensitive data. The API returns sensitive data when the request includes a sensitive dimension in either the filter or group-by parameters.

For more information about the dimensions that you can use with the `GetResourceMetrics` API, see DimensionGroup.

Examples

The following example requests the sensitive data for the `db.user` group:

```
POST / HTTP/1.1
Host: <Hostname>
Accept-Encoding: identity
X-Amz-Target: PerformanceInsightsv20180227.GetResourceMetrics
Content-Type: application/x-amz-json-1.1
User-Agent: <UserAgentString>
X-Amz-Date: <Date>
Authorization: AWS4-HMAC-SHA256 Credential=<Credential>, SignedHeaders=<Headers>,
 Signature=<Signature>
Content-Length: <PayloadSizeBytes>
{
  "ServiceType": "RDS",
  "Identifier": "db-ABC1DEFGHIJKL2MNOPQRSTUV3W",
  "MetricQueries": [
    {
      "Metric": "db.load.avg",
      "GroupBy": {
        "Group": "db.user",
        "Limit": 2
      }
    }
  ],
  "StartTime": 1693872000,
  "EndTime": 1694044800,
  "PeriodInSeconds": 86400
}
```

Example

The following example requests the non-sensitive data for the `db.load.avg` metric:

```
POST / HTTP/1.1
Host: <Hostname>
```

```
Accept-Encoding: identity
X-Amz-Target: PerformanceInsightsv20180227.GetResourceMetrics
Content-Type: application/x-amz-json-1.1
User-Agent: <UserAgentString>
X-Amz-Date: <Date>
Authorization: AWS4-HMAC-SHA256 Credential=<Credential>, SignedHeaders=<Headers>,
 Signature=<Signature>
Content-Length: <PayloadSizeBytes>
{
    "ServiceType": "RDS",
    "Identifier": "db-ABC1DEFGHIJKL2MNOPQRSTUV3W",
    "MetricQueries": [
        {
            "Metric": "db.load.avg"
        }
    ],
    "StartTime": 1693872000,
    "EndTime": 1694044800,
    "PeriodInSeconds": 86400
}
```

Granting fine-grained access for Database Insights

Fine-grained access control offers additional ways of controlling access to Database Insights. This access control can allow or deny access to individual dimensions for `GetResourceMetrics`, `DescribeDimensionKeys`, and `GetDimensionKeyDetails` Database Insights actions. To use fine-grained access, specify dimensions in the IAM policy by using condition keys. The evaluation of the access follows the IAM policy evaluation logic. For more information, see Policy evaluation logic in the *IAM User Guide*. If the IAM policy statement doesn't specify any dimension, then the statement controls access to all the dimensions for the specified action. For the list of available dimensions, see DimensionGroup.

To find out the dimensions that your credentials are authorized to access, use the `AuthorizedActions` parameter in `ListAvailableResourceDimensions` and specify the action. The allowed values for `AuthorizedActions` are as follows:

- `GetResourceMetrics`
- `DescribeDimensionKeys`
- `GetDimensionKeyDetails`

For example, if you specify `GetResourceMetrics` to the `AuthorizedActions` parameter, `ListAvailableResourceDimensions` returns the list of dimensions that the `GetResourceMetrics` action is authorized to access. If you specify multiple actions in the `AuthorizedActions` parameter, then `ListAvailableResourceDimensions` returns an intersection of dimensions that those actions are authorized to access.

Example

The following example provides access to the specified dimensions for `GetResourceMetrics` and `DescribeDimensionKeys` actions.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "AllowToDiscoverDimensions",
            "Effect": "Allow",
            "Action": [
                "pi:ListAvailableResourceDimensions"
            ],
            "Resource": [
                "arn:aws-cn:pi:us-east-1:123456789012:metrics/rds/db-
ABC1DEFGHIJKL2MNOPQRSTUV3W"
            ]
        },
        {
            "Sid": "SingleAllow",
            "Effect": "Allow",
            "Action": [
                "pi:GetResourceMetrics",
                "pi:DescribeDimensionKeys"
            ],
            "Resource": [
                "arn:aws-cn:pi:us-east-1:123456789012:metrics/rds/db-
ABC1DEFGHIJKL2MNOPQRSTUV3W"
            ],
            "Condition": {
                "ForAllValues:StringEquals": {
                    "pi:Dimensions": [
                        "db.sql_tokenized.id",
```

```
                        "db.sql_tokenized.statement"
                    ]
                }
            }
        }


    ]
}
```

The following is the response for the requested dimension:

```
 // ListAvailableResourceDimensions API
// Request
{
    "ServiceType": "RDS",
    "Identifier": "db-ABC1DEFGHIJKL2MNOPQRSTUV3W",
    "Metrics": [ "db.load" ],
    "AuthorizedActions": ["DescribeDimensionKeys"]
}

// Response
{
    "MetricDimensions": [ {
        "Metric": "db.load",
        "Groups": [
            {
                "Group": "db.sql_tokenized",
                "Dimensions": [
                    { "Identifier": "db.sql_tokenized.id" },
                  //  { "Identifier": "db.sql_tokenized.db_id" }, // not included
 because not allows in the IAM Policy
                    { "Identifier": "db.sql_tokenized.statement" }
                ]
            }

        ] }
    ]
}
```

The following example specifies one allow and two deny access for the dimensions.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
          {
            "Sid": "AllowToDiscoverDimensions",
            "Effect": "Allow",
            "Action": [
                "pi:ListAvailableResourceDimensions"
            ],
            "Resource": [
                "arn:aws-cn:pi:us-east-1:123456789012:metrics/rds/db-
ABC1DEFGHIJKL2MNOPQRSTUV3W"
            ]
          },

          {
            "Sid": "O01AllowAllWithoutSpecifyingDimensions",
            "Effect": "Allow",
            "Action": [
                "pi:GetResourceMetrics",
                "pi:DescribeDimensionKeys"
            ],
            "Resource": [
                "arn:aws-cn:pi:us-east-1:123456789012:metrics/rds/db-
ABC1DEFGHIJKL2MNOPQRSTUV3W"
            ]
        },

        {
            "Sid": "O01DenyAppDimensionForAll",
            "Effect": "Deny",
            "Action": [
                "pi:GetResourceMetrics",
                "pi:DescribeDimensionKeys"
            ],
            "Resource": [
                "arn:aws-cn:pi:us-east-1:123456789012:metrics/rds/db-
ABC1DEFGHIJKL2MNOPQRSTUV3W"
            ],
            "Condition": {
                "ForAnyValue:StringEquals": {
```

```
                    "pi:Dimensions": [
                        "db.application.name"
                    ]
                }
            }
        },

        {
            "Sid": "O01DenySQLForGetResourceMetrics",
            "Effect": "Deny",
            "Action": [
                "pi:GetResourceMetrics"
            ],
            "Resource": [
                "arn:aws-cn:pi:us-east-1:123456789012:metrics/rds/db-
ABC1DEFGHIJKL2MNOPQRSTUV3W"
            ],
            "Condition": {
                "ForAnyValue:StringEquals": {
                    "pi:Dimensions": [
                        "db.sql_tokenized.statement"
                    ]
                }
            }
        }
    ]
}
```

The following are the responses for the requested dimensions:

```
   // ListAvailableResourceDimensions API
// Request
{
    "ServiceType": "RDS",
    "Identifier": "db-ABC1DEFGHIJKL2MNOPQRSTUV3W",
    "Metrics": [ "db.load" ],
    "AuthorizedActions": ["GetResourceMetrics"]
}

// Response
```

```
{
    "MetricDimensions": [ {
        "Metric": "db.load",
        "Groups": [
            {
                "Group": "db.application",
                "Dimensions": [

                  // removed from response because denied by the IAM Policy
                  //  { "Identifier": "db.application.name" }
                ]
            },
            {
                "Group": "db.sql_tokenized",
                "Dimensions": [
                    { "Identifier": "db.sql_tokenized.id" },
                    { "Identifier": "db.sql_tokenized.db_id" },

                  // removed from response because denied by the IAM Policy
                  //  { "Identifier": "db.sql_tokenized.statement" }
                ]
            },
            ...
        ] }
    ]
}
```

```
// ListAvailableResourceDimensions API
// Request
{
    "ServiceType": "RDS",
    "Identifier": "db-ABC1DEFGHIJKL2MNOPQRSTUV3W",
    "Metrics": [ "db.load" ],
    "AuthorizedActions": ["DescribeDimensionKeys"]
}

// Response
{
    "MetricDimensions": [ {
        "Metric": "db.load",
        "Groups": [
            {
```

```
                "Group": "db.application",
                "Dimensions": [
                  // removed from response because denied by the IAM Policy
                  //  { "Identifier": "db.application.name" }
                ]
            },
            {
                "Group": "db.sql_tokenized",
                "Dimensions": [
                    { "Identifier": "db.sql_tokenized.id" },
                    { "Identifier": "db.sql_tokenized.db_id" },

                  // allowed for DescribeDimensionKeys because our IAM Policy
                  // denies it only for GetResourceMetrics
                    { "Identifier": "db.sql_tokenized.statement" }
                ]
            },
            ...
        ] }
    ]
}
```

Using tag-based access control for Database Insights

You can control access to Database Insights metrics using tags inherited from the parent DB instance. To control access to Database Insights operations, use IAM policies. These policies can check the tags on your DB instance to determine permissions.

How tags work with Database Insights

Database Insights automatically applies your DB instance tags to authorize Database Insights metrics. When you add tags to your DB instance, you can immediately use those tags to control access to Database Insights data.

- To add or update tags for Database Insights metrics, modify the tags on your DB instance.
- To view tags for Database Insights metrics, call `ListTagsForResource` on the Database Insights metric resource. It will return the tags from the DB instance associated with the metric.

Note

The `TagResource` and `UntagResource` operations return an error if you try to use them directly on Database Insights metrics.

Creating tag-based IAM policies

To control access to Database Insights operations, use the `aws:ResourceTag` condition key in your IAM policies. These policies check the tags on yourDB instance.

Example

This policy prevents access to Database Insights metrics for production databases. The policy denies the `pi:GetResourceMetrics` operation in Database Insights for any database resource tagged with `env:prod`.

```
 {
    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Deny",
            "Action": "pi:GetResourceMetrics",
            "Resource": "*",
            "Condition": {
                "StringEquals": {
                    "aws:ResourceTag/env": "prod"
                }
            }
        }
    ]
}
```

Viewing Database Insights proactive recommendations

Amazon RDS monitors specific metrics and automatically creates thresholds by analyzing what levels might be potentially problematic for a specified resource. When the new metric values cross a predefined threshold over a given period of time, Amazon RDS generates a proactive recommendation. This recommendation helps to prevent future database performance impact.

To receive these proactive recommendations, you must enable collecting detailed per-query and database counter metrics with a paid tier retention period.

For more information about enabling detailed per-query and database counter metrics, see Enabling and disabling detailed per-query and database counter metrics. For information about pricing and data retention for Database Insights, see Pricing and data retention for Database Insights.

To find out the regions, DB engines, and instance classes supported for the proactive recommendations, see Database Insights.

You can view the detailed analysis and recommended investigations of proactive recommendations in the recommendation details page.

For more information about recommendations, see Recommendations from Amazon Aurora.

To view the detailed analysis of a proactive recommendation

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, do any of the following:

   - Choose **Recommendations**.


     The **Recommendations** page displays a list of recommendations sorted by the severity for all the resources in your account.
   - Choose **Databases** and then choose **Recommendations** for a resource in the databases page.

     The **Recommendations** tab displays the recommendations and its details for the selected resource.
3. Find a proactive recommendation and choose **View details**.


   The recommendation details page appears. The title provides the name of the affected resource with the issue detected and the severity.

   The following are the components on the recommendation details page:


   - **Recommendation summary** – The detected issue, recommendation and issue status, issue start and end time, recommendation modified time, and the engine type.

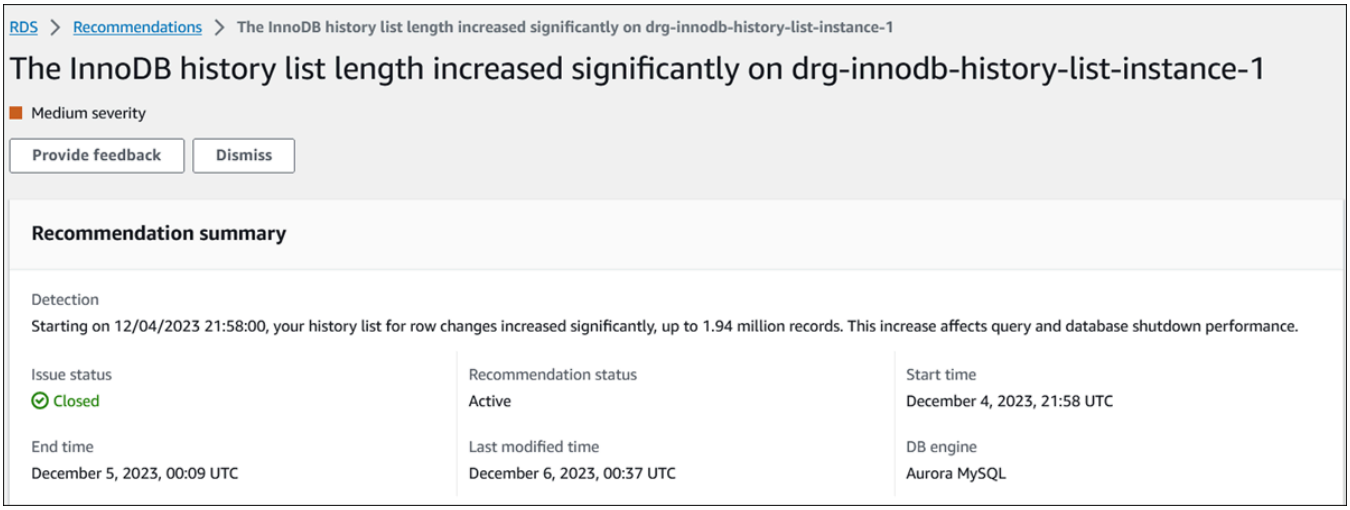

- **Metrics** – The graphs of the detected issue. Each graph displays a threshold determined by the resource's baseline behavior and data of the metric reported from the issue start time.

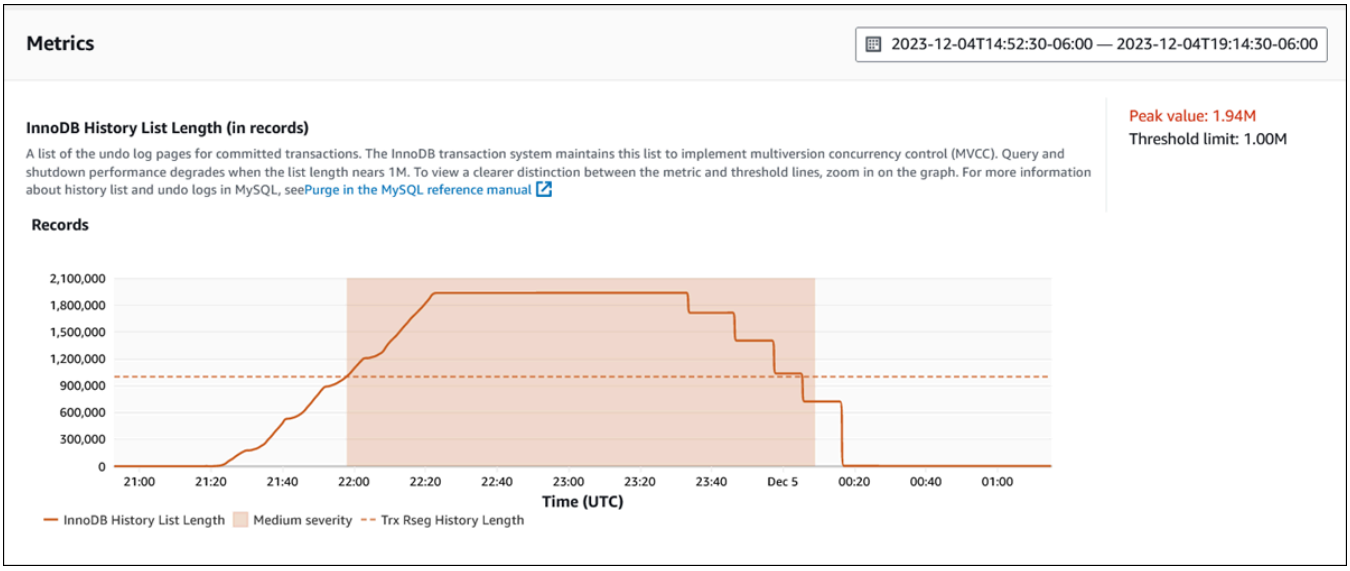

- **Analysis and recommendations** – The recommendation and the reason for the suggested recommendation.

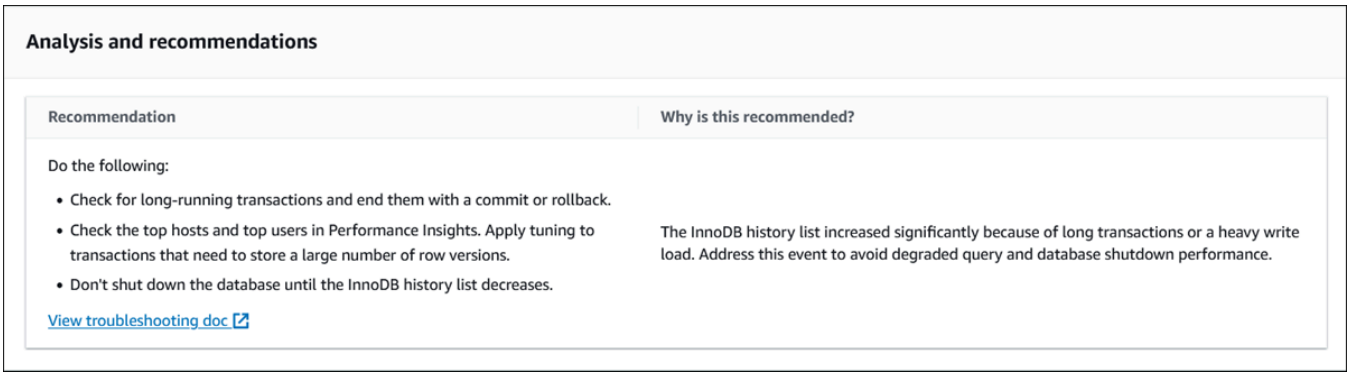

You can review the cause of the issue and then perform the suggested recommended actions to fix the issue, or choose **Dismiss** to dismiss the recommendation.

Retrieving metrics with the Performance Insights API for Aurora

When you enable detailed per-query and database counter metrics, the API provides visibility into instance performance. Amazon CloudWatch Logs provides the authoritative source for vended monitoring metrics for Amazon services.

Database Insights offers a domain-specific view of database load measured as average active sessions (AAS). This metric appears to API consumers as a two-dimensional time-series dataset. The time dimension of the data provides DB load data for each time point in the queried time range. Each time point decomposes overall load in relation to the requested dimensions, such as SQL, `Wait-event`, `User`, or `Host`, measured at that time point.

Amazon CloudWatch Database Insights monitors your Amazon Aurora cluster so that you can analyze and troubleshoot database performance. One way to view Database Insights data is in the Amazon Web Services Management Console. Performance Insights also provides a public API so that you can query your own data. You can use the API to do the following:

- Offload data into a database
- Add Database Insights data to existing monitoring dashboards
- Build monitoring tools

To use the Performance Insights API, enable detailed per-query and database counter metrics on one of your Amazon RDS DB instances. For information about enabling detailed per-query and database counter metrics, see Enabling and disabling detailed per-query and database counter metrics. For more information about the Performance Insights API, see the Amazon RDS Performance Insights API Reference.

The Performance Insights API provides the following operations.

Performance Insights action	Amazon CLI command	Description
CreatePerformanceAnalysisReport	aws pi create-performance-analysis-report	Creates a performance analysis report for a specific time period for the DB instance. The result is AnalysisReportId which is the unique identifier of the report.
DeletePerformanceAnalysisReport	aws pi delete-performance-analysis-report	Deletes a performance analysis report.
DescribeDimensionKeys	aws pi describe-dimension-keys	Retrieves the top N dimension keys for a metric for a specific time period.
GetDimensionKeyDetails	aws pi get-dimension-key-details	Retrieves the attributes of the specified dimension group for a DB instance or data source. For example, if you specify a SQL ID, and if the dimension details are available, GetDimensionKeyDetails retrieves the full text of the dimension db.sql.statement associated with this ID. This operation is useful because GetResourceMetrics and DescribeDimensionKeys don't support retrieval of large SQL statement text.

Performance Insights action	Amazon CLI command	Description
GetPerformanceAnalysisReport	aws pi get-performance-analysis-report	Retrieves the report including the insights for the report. The result includes the report status, report ID, report time details, insights, and recommendations.
GetResourceMetadata	aws pi get-resource-metadata	Retrieve the metadata for different features. For example, the metadata might indicate that a feature is turned on or off on a specific DB instance.
GetResourceMetrics	aws pi get-resource-metrics	Retrieves Performance Insights metrics for a set of data sources over a time period. You can provide specific dimension groups and dimensions, and provide aggregation and filtering criteria for each group.
ListAvailableResourceDimensions	aws pi list-available-resource-dimensions	Retrieve the dimensions that can be queried for each specified metric type on a specified instance.
ListAvailableResourceMetrics	aws pi list-available-resource-metrics	Retrieve all available metrics of the specified metric types that can be queried for a specified DB instance.

Performance Insights action	Amazon CLI command	Description
ListPerformanceAnalysisReports	aws pi list-performance-analysis-reports	Retrieves all the analysis reports available for the DB instance. The reports are listed based on the start time of each report.
ListTagsForResource	aws pi list-tags-for-resource	Lists all the metadata tags added to the resource. The list includes the name and value of the tag.
TagResource	aws pi tag-resource	Adds metadata tags to the Amazon RDS resource. The tag includes a name and a value.
UntagResource	aws pi untag-resource	Removes the metadata tag from the resource.

For more information about retrieving time-series metrics and Amazon CLI examples for Performance Insights, see the following topics.


Topics

- Retrieving time-series metrics for Performance Insights
- Amazon CLI examples for Performance Insights

Retrieving time-series metrics for Performance Insights

The `GetResourceMetrics` operation retrieves one or more time-series metrics from the Performance Insights data. `GetResourceMetrics` requires a metric and time period, and returns a response with a list of data points.

For example, the Amazon Web Services Management Console uses `GetResourceMetrics` to populate the **Counter Metrics** chart and the **Database Load** chart, as seen in the following image.

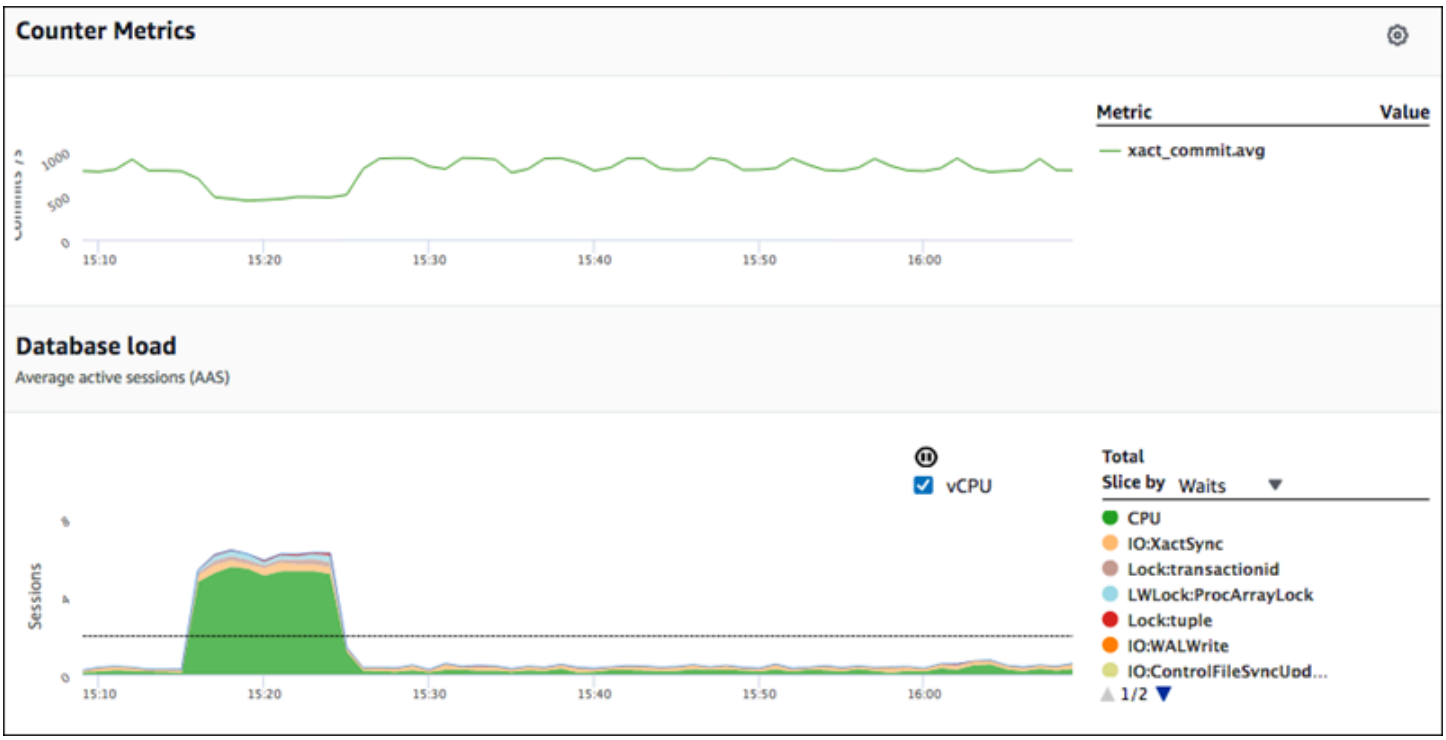

All metrics returned by `GetResourceMetrics` are standard time-series metrics, with the exception of `db.load`. This metric is displayed in the **Database Load** chart. The `db.load` metric is different from the other time-series metrics because you can break it into subcomponents called *dimensions*. In the previous image, `db.load` is broken down and grouped by the waits states that make up the `db.load`.

> **Note**
>
> `GetResourceMetrics` can also return the `db.sampleload` metric, but the `db.load` metric is appropriate in most cases.

For information about the counter metrics returned by `GetResourceMetrics`, see Detailed Database Metrics.

The following calculations are supported for the metrics:

- Average – The average value for the metric over a period of time. Append `.avg` to the metric name.
- Minimum – The minimum value for the metric over a period of time. Append `.min` to the metric name.

- Maximum – The maximum value for the metric over a period of time. Append `.max` to the metric name.
- Sum – The sum of the metric values over a period of time. Append `.sum` to the metric name.
- Sample count – The number of times the metric was collected over a period of time. Append `.sample_count` to the metric name.

For example, assume that a metric is collected for 300 seconds (5 minutes), and that the metric is collected one time each minute. The values for each minute are 1, 2, 3, 4, and 5. In this case, the following calculations are returned:

- Average – 3
- Minimum – 1
- Maximum – 5
- Sum – 15
- Sample count – 5

For information about using the `get-resource-metrics` Amazon CLI command, see `get-resource-metrics`.

For the `--metric-queries` option, specify one or more queries that you want to get results for. Each query consists of a mandatory `Metric` and optional `GroupBy` and `Filter` parameters. The following is an example of a `--metric-queries` option specification.

```
{
   "Metric": "string",
   "GroupBy": {
     "Group": "string",
     "Dimensions": ["string", ...],
     "Limit": integer
   },
   "Filter": {"string": "string"
     ...}
```

Amazon CLI examples for Performance Insights

In the following sections, learn more about the Amazon Command Line Interface (Amazon CLI) for Performance Insights and use Amazon CLI examples.

Topics

- Built-in help for the Amazon CLI for Performance Insights
- Retrieving counter metrics
- Retrieving the DB load average for top wait events
- Retrieving the DB load average for top SQL
- Retrieving the DB load average filtered by SQL
- Retrieving the full text of a SQL statement
- Creating a performance analysis report for a time period
- Retrieving a performance analysis report
- Listing all the performance analysis reports for the DB instance
- Deleting a performance analysis report
- Adding tag to a performance analysis report
- Listing all the tags for a performance analysis report
- Deleting tags from a performance analysis report

Built-in help for the Amazon CLI for Performance Insights


You can view Performance Insights data using the Amazon CLI. You can view help for the Amazon CLI commands for Performance Insights by entering the following on the command line.

```
aws pi help
```

If you don't have the Amazon CLI installed, see Installing the Amazon CLI in the *Amazon CLI User Guide* for information about installing it.

Retrieving counter metrics

The following screenshot shows two counter metrics charts in the Amazon Web Services Management Console.

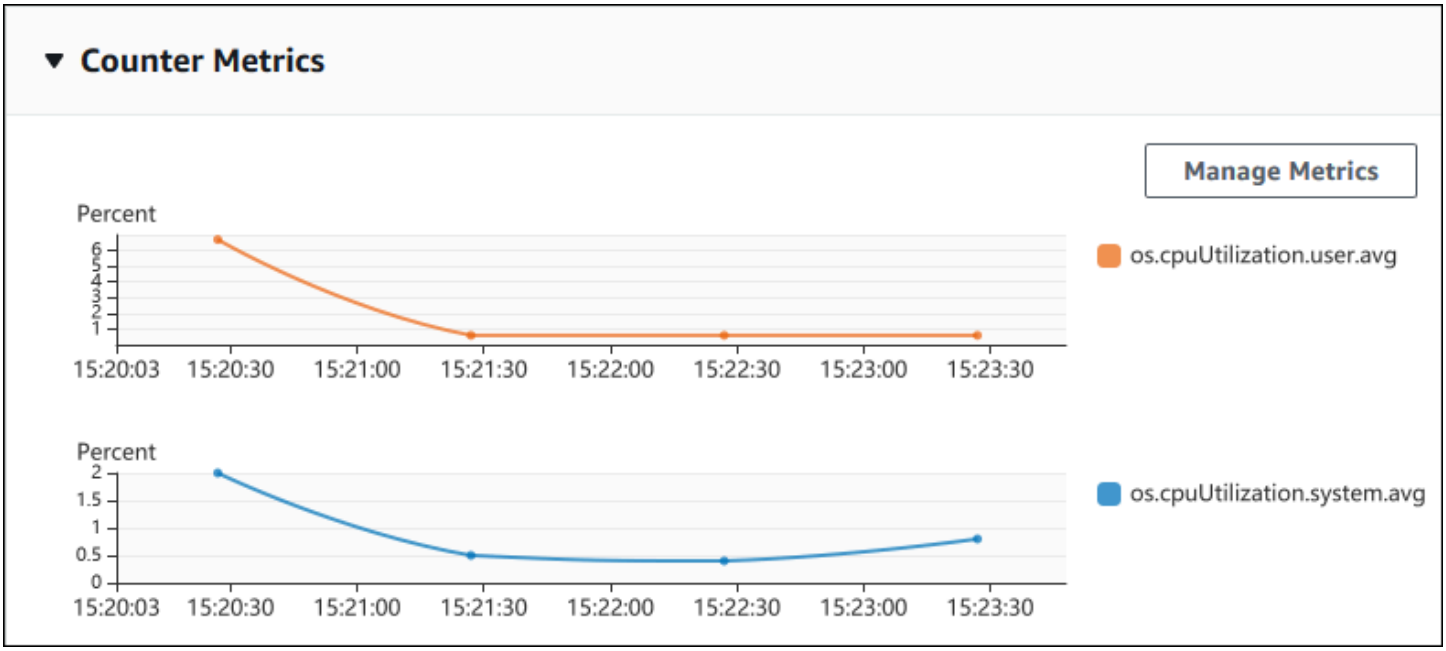

The following example shows how to gather the same data that the Amazon Web Services Management Console uses to generate the two counter metric charts.

For Linux, macOS, or Unix:

```
aws pi get-resource-metrics \
   --service-type RDS \
   --identifier db-ID \
   --start-time 2018-10-30T00:00:00Z \
   --end-time   2018-10-30T01:00:00Z \
   --period-in-seconds 60 \
   --metric-queries '[{"Metric": "os.cpuUtilization.user.avg"  },
                      {"Metric": "os.cpuUtilization.idle.avg"}]'
```

For Windows:

```
aws pi get-resource-metrics ^
   --service-type RDS ^
   --identifier db-ID ^
   --start-time 2018-10-30T00:00:00Z ^
   --end-time   2018-10-30T01:00:00Z ^
   --period-in-seconds 60 ^
   --metric-queries '[{"Metric": "os.cpuUtilization.user.avg"  },
                      {"Metric": "os.cpuUtilization.idle.avg"}]'
```

You can also make a command easier to read by specifying a file for the `--metrics-query` option. The following example uses a file called query.json for the option. The file has the following contents.

```
[
    {
        "Metric": "os.cpuUtilization.user.avg"
    },
    {
        "Metric": "os.cpuUtilization.idle.avg"
    }
]
```

Run the following command to use the file.

For Linux, macOS, or Unix:

```
aws pi get-resource-metrics \
   --service-type RDS \
   --identifier db-ID \
   --start-time 2018-10-30T00:00:00Z \
   --end-time   2018-10-30T01:00:00Z \
   --period-in-seconds 60 \
   --metric-queries file://query.json
```

For Windows:

```
aws pi get-resource-metrics ^
   --service-type RDS ^
   --identifier db-ID ^
   --start-time 2018-10-30T00:00:00Z ^
   --end-time   2018-10-30T01:00:00Z ^
   --period-in-seconds 60 ^
   --metric-queries file://query.json
```

The preceding example specifies the following values for the options:

- `--service-type` – RDS for Amazon RDS
- `--identifier` – The resource ID for the DB instance
- `--start-time` and `--end-time` – The ISO 8601 `DateTime` values for the period to query, with multiple supported formats

It queries for a one-hour time range:

- `--period-in-seconds` – `60` for a per-minute query
- `--metric-queries` – An array of two queries, each just for one metric.

  The metric name uses dots to classify the metric in a useful category, with the final element being a function. In the example, the function is `avg` for each query. As with Amazon CloudWatch, the supported functions are `min`, `max`, `total`, and `avg`.

The response looks similar to the following.

```
{
    "Identifier": "db-XXX",
    "AlignedStartTime": 1540857600.0,
    "AlignedEndTime": 1540861200.0,
    "MetricList": [
        { //A list of key/datapoints
            "Key": {
                "Metric": "os.cpuUtilization.user.avg" //Metric1
            },
            "DataPoints": [
                //Each list of datapoints has the same timestamps and same number of
 items
                {
                    "Timestamp": 1540857660.0, //Minute1
                    "Value": 4.0
                },
                {
                    "Timestamp": 1540857720.0, //Minute2
                    "Value": 4.0
                },
                {
                    "Timestamp": 1540857780.0, //Minute 3
                    "Value": 10.0
                }
                //... 60 datapoints for the os.cpuUtilization.user.avg metric
            ]
        },
        {
            "Key": {
                "Metric": "os.cpuUtilization.idle.avg" //Metric2
            },
```

```
            "DataPoints": [
                {
                    "Timestamp": 1540857660.0, //Minute1
                    "Value": 12.0
                },
                {
                    "Timestamp": 1540857720.0, //Minute2
                    "Value": 13.5
                },
                //... 60 datapoints for the os.cpuUtilization.idle.avg metric
            ]
        }
    ] //end of MetricList
} //end of response
```

The response has an `Identifier`, `AlignedStartTime`, and `AlignedEndTime`. B the `--period-in-seconds` value was `60`, the start and end times have been aligned to the minute. If the `--period-in-seconds` was `3600`, the start and end times would have been aligned to the hour.

The `MetricList` in the response has a number of entries, each with a `Key` and a `DataPoints` entry. Each `DataPoint` has a `Timestamp` and a `Value`. Each `Datapoints` list has 60 data points because the queries are for per-minute data over an hour, with `Timestamp1/Minute1`, `Timestamp2/Minute2`, and so on, up to `Timestamp60/Minute60`.

Because the query is for two different counter metrics, there are two elements in the response `MetricList`.

Retrieving the DB load average for top wait events

The following example is the same query that the Amazon Web Services Management Console uses to generate a stacked area line graph. This example retrieves the `db.load.avg` for the last hour with load divided according to the top seven wait events. The command is the same as the command in Retrieving counter metrics. However, the query.json file has the following contents.

```
[
    {
        "Metric": "db.load.avg",
        "GroupBy": { "Group": "db.wait_event", "Limit": 7 }
    }
]
```

Run the following command.

For Linux, macOS, or Unix:

```
aws pi get-resource-metrics \
   --service-type RDS \
   --identifier db-ID \
   --start-time 2018-10-30T00:00:00Z \
   --end-time   2018-10-30T01:00:00Z \
   --period-in-seconds 60 \
   --metric-queries file://query.json
```

For Windows:

```
aws pi get-resource-metrics ^
   --service-type RDS ^
   --identifier db-ID ^
   --start-time 2018-10-30T00:00:00Z ^
   --end-time   2018-10-30T01:00:00Z ^
   --period-in-seconds 60 ^
   --metric-queries file://query.json
```

The example specifies the metric of `db.load.avg` and a `GroupBy` of the top seven wait events. For details about valid values for this example, see DimensionGroup in the *Performance Insights API Reference.*

The response looks similar to the following.

```
{
    "Identifier": "db-XXX",
    "AlignedStartTime": 1540857600.0,
    "AlignedEndTime": 1540861200.0,
    "MetricList": [
        { //A list of key/datapoints
            "Key": {
                //A Metric with no dimensions. This is the total db.load.avg
                "Metric": "db.load.avg"
            },
            "DataPoints": [
                //Each list of datapoints has the same timestamps and same number of
 items
                {
                    "Timestamp": 1540857660.0, //Minute1
                    "Value": 0.5166666666666667
```

```
                },
                {
                    "Timestamp": 1540857720.0, //Minute2
                    "Value": 0.38333333333333336
                },
                {
                    "Timestamp": 1540857780.0, //Minute 3
                    "Value": 0.26666666666666666
                }
                //... 60 datapoints for the total db.load.avg key
            ]
        },
        {
            "Key": {
                //Another key. This is db.load.avg broken down by CPU
                "Metric": "db.load.avg",
                "Dimensions": {
                    "db.wait_event.name": "CPU",
                    "db.wait_event.type": "CPU"
                }
            },
            "DataPoints": [
                {
                    "Timestamp": 1540857660.0, //Minute1
                    "Value": 0.35
                },
                {
                    "Timestamp": 1540857720.0, //Minute2
                    "Value": 0.15
                },
                //... 60 datapoints for the CPU key
            ]
        },
        //... In total we have 8 key/datapoints entries, 1) total, 2-8) Top Wait Events
    ] //end of MetricList
} //end of response
```

In this response, there are eight entries in the `MetricList`. There is one entry for the total `db.load.avg`, and seven entries each for the `db.load.avg` divided according to one of the top seven wait events. Unlike in the first example, because there was a grouping dimension, there must be one key for each grouping of the metric. There can't be only one key for each metric, as in the basic counter metric use case.

Retrieving the DB load average for top SQL

The following example groups `db.wait_events` by the top 10 SQL statements. There are two different groups for SQL statements:

- `db.sql` – The full SQL statement, such as `select * from customers where customer_id = 123`
- `db.sql_tokenized` – The tokenized SQL statement, such as `select * from customers where customer_id = ?`

When analyzing database performance, it can be useful to consider SQL statements that only differ by their parameters as one logic item. So, you can use `db.sql_tokenized` when querying. However, especially when you're interested in explain plans, sometimes it's more useful to examine full SQL statements with parameters, and query grouping by `db.sql`. There is a parent-child relationship between tokenized and full SQL, with multiple full SQL (children) grouped under the same tokenized SQL (parent).

The command in this example is the similar to the command in Retrieving the DB load average for top wait events. However, the query.json file has the following contents.

```
[
    {
        "Metric": "db.load.avg",
        "GroupBy": { "Group": "db.sql_tokenized", "Limit": 10 }
    }
]
```

The following example uses `db.sql_tokenized`.

For Linux, macOS, or Unix:

```
aws pi get-resource-metrics \
   --service-type RDS \
   --identifier db-ID \
   --start-time 2018-10-29T00:00:00Z \
   --end-time   2018-10-30T00:00:00Z \
   --period-in-seconds 3600 \
   --metric-queries file://query.json
```

For Windows:

```
aws pi get-resource-metrics ^
   --service-type RDS ^
   --identifier db-ID ^
   --start-time 2018-10-29T00:00:00Z ^
   --end-time   2018-10-30T00:00:00Z  ^
   --period-in-seconds 3600 ^
   --metric-queries file://query.json
```

This example queries over 24 hours, with a one hour period-in-seconds.

The example specifies the metric of `db.load.avg` and a `GroupBy` of the top seven wait events. For details about valid values for this example, see DimensionGroup in the *Performance Insights API Reference.*

The response looks similar to the following.

```
{
    "AlignedStartTime": 1540771200.0,
    "AlignedEndTime": 1540857600.0,
    "Identifier": "db-XXX",

    "MetricList": [ //11 entries in the MetricList
        {
            "Key": { //First key is total
                "Metric": "db.load.avg"
            }
            "DataPoints": [ //Each DataPoints list has 24 per-hour Timestamps and a
 value
                {
                    "Value": 1.6964980544747081,
                    "Timestamp": 1540774800.0
                },
                //... 24 datapoints
            ]
        },
        {
            "Key": { //Next key is the top tokenized SQL
                "Dimensions": {
                    "db.sql_tokenized.statement": "INSERT INTO authors (id,name,email)
 VALUES\n( nextval(?)  ,?,?)",
                    "db.sql_tokenized.db_id": "pi-2372568224",
                    "db.sql_tokenized.id": "AKIAIOSFODNN7EXAMPLE"
                },
```

```
                "Metric": "db.load.avg"
            },
            "DataPoints": [ //... 24 datapoints
            ]
        },
        // In total 11 entries, 10 Keys of top tokenized SQL, 1 total key
    ] //End of MetricList
} //End of response
```

This response has 11 entries in the `MetricList` (1 total, 10 top tokenized SQL), with each entry having 24 per-hour `DataPoints`.

For tokenized SQL, there are three entries in each dimensions list:

- `db.sql_tokenized.statement` – The tokenized SQL statement.
- `db.sql_tokenized.db_id` – Either the native database ID used to refer to the SQL, or a synthetic ID that Performance Insights generates for you if the native database ID isn't available. This example returns the `pi-2372568224` synthetic ID.
- `db.sql_tokenized.id` – The ID of the query inside Performance Insights.

  In the Amazon Web Services Management Console, this ID is called the Support ID. It's named this because the ID is data that Amazon Support can examine to help you troubleshoot an issue with your database. Amazon takes the security and privacy of your data extremely seriously, and almost all data is stored encrypted with your Amazon KMS key. Therefore, nobody inside Amazon can look at this data. In the example preceding, both the `tokenized.statement` and the `tokenized.db_id` are stored encrypted. If you have an issue with your database, Amazon Support can help you by referencing the Support ID.

When querying, it might be convenient to specify a `Group` in `GroupBy`. However, for finer-grained control over the data that's returned, specify the list of dimensions. For example, if all that is needed is the `db.sql_tokenized.statement`, then a `Dimensions` attribute can be added to the query.json file.

```
[
    {
        "Metric": "db.load.avg",
        "GroupBy": {
            "Group": "db.sql_tokenized",
            "Dimensions":["db.sql_tokenized.statement"],
```

```
            "Limit": 10
        }
    }
]
```

Retrieving the DB load average filtered by SQL



The preceding image shows that a particular query is selected, and the top average active sessions stacked area line graph is scoped to that query. Although the query is still for the top seven overall wait events, the value of the response is filtered. The filter causes it to take into account only sessions that are a match for the particular filter.

The corresponding API query in this example is similar to the command in [Retrieving the DB load average for top SQL](). However, the query.json file has the following contents.

```
[
 {
        "Metric": "db.load.avg",
        "GroupBy": { "Group": "db.wait_event", "Limit": 5  },
        "Filter": { "db.sql_tokenized.id": "AKIAIOSFODNN7EXAMPLE" }
    }
]
```

For Linux, macOS, or Unix:

```
aws pi get-resource-metrics \
   --service-type RDS \
   --identifier db-ID \
   --start-time 2018-10-30T00:00:00Z \
   --end-time   2018-10-30T01:00:00Z \
   --period-in-seconds 60 \
   --metric-queries file://query.json
```

For Windows:

```
aws pi get-resource-metrics ^
   --service-type RDS ^
   --identifier db-ID ^
   --start-time 2018-10-30T00:00:00Z ^
   --end-time   2018-10-30T01:00:00Z ^
   --period-in-seconds 60 ^
   --metric-queries file://query.json
```

The response looks similar to the following.

```
{
    "Identifier": "db-XXX",
    "AlignedStartTime": 1556215200.0,
    "MetricList": [
        {
            "Key": {
                "Metric": "db.load.avg"
            },
            "DataPoints": [
                {
                    "Timestamp": 1556218800.0,
                    "Value": 1.4878117913832196
                },
                {
                    "Timestamp": 1556222400.0,
                    "Value": 1.192823803967328
                }
            ]
        },
        {
            "Key": {
```

```
                "Metric": "db.load.avg",
                "Dimensions": {
                    "db.wait_event.type": "io",
                    "db.wait_event.name": "wait/io/aurora_redo_log_flush"
                }
            },
            "DataPoints": [
                {
                    "Timestamp": 1556218800.0,
                    "Value": 1.1360544217687074
                },
                {
                    "Timestamp": 1556222400.0,
                    "Value": 1.058051341890315
                }
            ]
        },
        {
            "Key": {
                "Metric": "db.load.avg",
                "Dimensions": {
                    "db.wait_event.type": "io",
                    "db.wait_event.name": "wait/io/table/sql/handler"
                }
            },
            "DataPoints": [
                {
                    "Timestamp": 1556218800.0,
                    "Value": 0.16241496598639457
                },
                {
                    "Timestamp": 1556222400.0,
                    "Value": 0.05163360560093349
                }
            ]
        },
        {
            "Key": {
                "Metric": "db.load.avg",
                "Dimensions": {
                    "db.wait_event.type": "synch",
                    "db.wait_event.name": "wait/synch/mutex/innodb/
aurora_lock_thread_slot_futex"
                }
```

```
            },
            "DataPoints": [
                {
                    "Timestamp": 1556218800.0,
                    "Value": 0.11479591836734694
                },
                {
                    "Timestamp": 1556222400.0,
                    "Value": 0.013127187864644107
                }
            ]
        },
        {
            "Key": {
                "Metric": "db.load.avg",
                "Dimensions": {
                    "db.wait_event.type": "CPU",
                    "db.wait_event.name": "CPU"
                }
            },
            "DataPoints": [
                {
                    "Timestamp": 1556218800.0,
                    "Value": 0.05215419501133787
                },
                {
                    "Timestamp": 1556222400.0,
                    "Value": 0.05805134189031505
                }
            ]
        },
        {
            "Key": {
                "Metric": "db.load.avg",
                "Dimensions": {
                    "db.wait_event.type": "synch",
                    "db.wait_event.name": "wait/synch/mutex/innodb/lock_wait_mutex"
                }
            },
            "DataPoints": [
                {
                    "Timestamp": 1556218800.0,
                    "Value": 0.017573696145124718
                },
```

```
                {
                    "Timestamp": 1556222400.0,
                    "Value": 0.002333722287047841
                }
            ]
        }
    ],
    "AlignedEndTime": 1556222400.0
} //end of response
```

In this response, all values are filtered according to the contribution of tokenized SQL AKIAIOSFODNN7EXAMPLE specified in the query.json file. The keys also might follow a different order than a query without a filter, because it's the top five wait events that affected the filtered SQL.

Retrieving the full text of a SQL statement

The following example retrieves the full text of a SQL statement for DB instance `db-10BCD2EFGHIJ3KL4M5NO6PQRS5`. The `--group` is `db.sql`, and the `--group-identifier` is `db.sql.id`. In this example, *`my-sql-id`* represents a SQL ID retrieved by invoking `pi get-resource-metrics` or `pi describe-dimension-keys`.

Run the following command.

For Linux, macOS, or Unix:

```
aws pi get-dimension-key-details \
   --service-type RDS \
   --identifier db-10BCD2EFGHIJ3KL4M5NO6PQRS5 \
   --group db.sql \
   --group-identifier my-sql-id \
   --requested-dimensions statement
```

For Windows:

```
aws pi get-dimension-key-details ^
   --service-type RDS ^
   --identifier db-10BCD2EFGHIJ3KL4M5NO6PQRS5 ^
   --group db.sql ^
   --group-identifier my-sql-id ^
   --requested-dimensions statement
```

In this example, the dimensions details are available. Thus, Performance Insights retrieves the full text of the SQL statement, without truncating it.

```
{
    "Dimensions":[
    {
        "Value": "SELECT e.last_name, d.department_name FROM employees e, departments d
 WHERE e.department_id=d.department_id",
        "Dimension": "db.sql.statement",
        "Status": "AVAILABLE"
    },
    ...
    ]
}
```

Creating a performance analysis report for a time period

The following example creates a performance analysis report with the `1682969503` start time and `1682979503` end time for the `db-loadtest-0` database.

```
aws pi create-performance-analysis-report \
        --service-type RDS \
        --identifier db-loadtest-0 \
        --start-time 1682969503 \
        --end-time 1682979503 \
        --region us-west-2
```

The response is the unique identifier `report-0234d3ed98e28fb17` for the report.

```
{
   "AnalysisReportId": "report-0234d3ed98e28fb17"
}
```

Retrieving a performance analysis report

The following example retrieves the analysis report details for the `report-0d99cc91c4422ee61` report.

```
aws pi get-performance-analysis-report \
--service-type RDS \
--identifier db-loadtest-0 \
```

```
--analysis-report-id report-0d99cc91c4422ee61 \
--region us-west-2
```

The response provides the report status, ID, time details, and insights.

```
        {
    "AnalysisReport": {
        "Status": "Succeeded",
        "ServiceType": "RDS",
        "Identifier": "db-loadtest-0",
        "StartTime": 1680583486.584,
        "AnalysisReportId": "report-0d99cc91c4422ee61",
        "EndTime": 1680587086.584,
        "CreateTime": 1680587087.139,
        "Insights": [
           ... (Condensed for space)
        ]
    }
}
```

Listing all the performance analysis reports for the DB instance

The following example lists all the available performance analysis reports for the `db-loadtest-0` database.

```
aws pi list-performance-analysis-reports \
--service-type RDS \
--identifier db-loadtest-0 \
--region us-west-2
```

The response lists all the reports with the report ID, status, and time period details.

```
{
    "AnalysisReports": [
        {
            "Status": "Succeeded",
            "EndTime": 1680587086.584,
            "CreationTime": 1680587087.139,
            "StartTime": 1680583486.584,
            "AnalysisReportId": "report-0d99cc91c4422ee61"
        },
```

```
        {
            "Status": "Succeeded",
            "EndTime": 1681491137.914,
            "CreationTime": 1681491145.973,
            "StartTime": 1681487537.914,
            "AnalysisReportId": "report-002633115cc002233"
        },
        {
            "Status": "Succeeded",
            "EndTime": 1681493499.849,
            "CreationTime": 1681493507.762,
            "StartTime": 1681489899.849,
            "AnalysisReportId": "report-043b1e006b47246f9"
        },
        {
            "Status": "InProgress",
            "EndTime": 1682979503.0,
            "CreationTime": 1682979618.994,
            "StartTime": 1682969503.0,
            "AnalysisReportId": "report-01ad15f9b88bcbd56"
        }
    ]
}
```

Deleting a performance analysis report

The following example deletes the analysis report for the `db-loadtest-0` database.

```
aws pi delete-performance-analysis-report \
--service-type RDS \
--identifier db-loadtest-0 \
--analysis-report-id report-0d99cc91c4422ee61 \
--region us-west-2
```

Adding tag to a performance analysis report

The following example adds a tag with a key `name` and value `test-tag` to the `report-01ad15f9b88bcbd56` report.

```
aws pi tag-resource \
--service-type RDS \
--resource-arn arn:aws:pi:us-west-2:356798100956:perf-reports/RDS/db-loadtest-0/
report-01ad15f9b88bcbd56 \
```

```
--tags Key=name,Value=test-tag \
--region us-west-2
```

Listing all the tags for a performance analysis report

The following example lists all the tags for the `report-01ad15f9b88bcbd56` report.

```
aws pi list-tags-for-resource \
--service-type RDS \
--resource-arn arn:aws:pi:us-west-2:356798100956:perf-reports/RDS/db-loadtest-0/
report-01ad15f9b88bcbd56 \
--region us-west-2
```

The response lists the value and key for all the tags added to the report:

```
{
    "Tags": [
        {
            "Value": "test-tag",
            "Key": "name"
        }
    ]
}
```

Deleting tags from a performance analysis report

The following example deletes the `name` tag from the `report-01ad15f9b88bcbd56` report.

```
aws pi untag-resource \
--service-type RDS \
--resource-arn arn:aws:pi:us-west-2:356798100956:perf-reports/RDS/db-loadtest-0/
report-01ad15f9b88bcbd56 \
--tag-keys name \
--region us-west-2
```

After the tag is deleted, calling the `list-tags-for-resource` API doesn't list this tag.

Logging Performance Insights calls using Amazon CloudTrail

Performance Insights runs with Amazon CloudTrail, a service that provides a record of actions taken by a user, role, or an Amazon service in Performance Insights. CloudTrail captures all API calls

for Performance Insights as events. This capture includes calls from the Amazon RDS console and from code calls to the Performance Insights API operations.

If you create a trail, you can enable continuous delivery of CloudTrail events to an Amazon S3 bucket, including events for Performance Insights. If you don't configure a trail, you can still view the most recent events in the CloudTrail console in **Event history**. Using the data collected by CloudTrail, you can determine certain information. This information includes the request that was made to Performance Insights, the IP address the request was made from, who made the request, and when it was made. It also includes additional details.

To learn more about CloudTrail, see the Amazon CloudTrail User Guide.

Working with Performance Insights information in CloudTrail

CloudTrail is enabled on your Amazon account when you create the account. When activity occurs in Performance Insights, that activity is recorded in a CloudTrail event along with other Amazon service events in the CloudTrail console in **Event history**. You can view, search, and download recent events in your Amazon account. For more information, see Viewing Events with CloudTrail Event History in *Amazon CloudTrail User Guide.*

For an ongoing record of events in your Amazon account, including events for Performance Insights, create a trail. A *trail* enables CloudTrail to deliver log files to an Amazon S3 bucket. By default, when you create a trail in the console, the trail applies to all Amazon Regions. The trail logs events from all Amazon Regions in the Amazon partition and delivers the log files to the Amazon S3 bucket that you specify. Additionally, you can configure other Amazon services to further analyze and act upon the event data collected in CloudTrail logs. For more information, see the following topics in *Amazon CloudTrail User Guide:*

- Overview for Creating a Trail
- CloudTrail Supported Services and Integrations
- Configuring Amazon SNS Notifications for CloudTrail
- Receiving CloudTrail Log Files from Multiple Regions and Receiving CloudTrail Log Files from Multiple Accounts

All Performance Insights operations are logged by CloudTrail and are documented in the Performance Insights API Reference. For example, calls to the `DescribeDimensionKeys` and `GetResourceMetrics` operations generate entries in the CloudTrail log files.

Every event or log entry contains information about who generated the request. The identity information helps you determine the following:

- Whether the request was made with root or IAM user credentials.
- Whether the request was made with temporary security credentials for a role or federated user.
- Whether the request was made by another Amazon service.

For more information, see the CloudTrail userIdentity Element.

Performance Insights log file entries

A *trail* is a configuration that enables delivery of events as log files to an Amazon S3 bucket that you specify. CloudTrail log files contain one or more log entries. An *event* represents a single request from any source. Each event includes information about the requested operation, the date and time of the operation, request parameters, and so on. CloudTrail log files aren't an ordered stack trace of the public API calls, so they don't appear in any specific order.

The following example shows a CloudTrail log entry that demonstrates the `GetResourceMetrics` operation.


```
{
    "eventVersion": "1.05",
    "userIdentity": {
        "type": "IAMUser",
         "principalId": "AKIAIOSFODNN7EXAMPLE",
        "arn": "arn:aws-cn:iam::123456789012:user/johndoe",
        "accountId": "123456789012",
        "accessKeyId": "AKIAI44QH8DHBEXAMPLE",
        "userName": "johndoe"
    },
    "eventTime": "2019-12-18T19:28:46Z",
    "eventSource": "pi.amazonaws.com",
    "eventName": "GetResourceMetrics",
    "awsRegion": "us-east-1",
    "sourceIPAddress": "72.21.198.67",
    "userAgent": "aws-cli/1.16.240 Python/3.7.4 Darwin/18.7.0 botocore/1.12.230",
    "requestParameters": {
        "identifier": "db-YTDU5J5V66X7CXSCVDFD2V3SZM",
        "metricQueries": [
            {
                "metric": "os.cpuUtilization.user.avg"
```

```
            },
            {
                "metric": "os.cpuUtilization.idle.avg"
            }
        ],
        "startTime": "Dec 18, 2019 5:28:46 PM",
        "periodInSeconds": 60,
        "endTime": "Dec 18, 2019 7:28:46 PM",
        "serviceType": "RDS"
    },
    "responseElements": null,
    "requestID": "9ffbe15c-96b5-4fe6-bed9-9fccff1a0525",
    "eventID": "08908de0-2431-4e2e-ba7b-f5424f908433",
    "eventType": "AwsApiCall",
    "recipientAccountId": "123456789012"
}
```


Performance Insights API and interface VPC endpoints (Amazon PrivateLink)

You can use Amazon PrivateLink to create a private connection between your VPC and Amazon RDS Performance Insights. You can access Performance Insights as if it were in your VPC, without the use of an internet gateway, NAT device, VPN connection, or Amazon Direct Connect connection. Instances in your VPC don't need public IP addresses to access Performance Insights.

You establish this private connection by creating an *interface endpoint*, powered by Amazon PrivateLink. We create an endpoint network interface in each subnet that you enable for the interface endpoint. These are requester-managed network interfaces that serve as the entry point for traffic destined for Performance Insights.

For more information, see Access Amazon Web Services services through Amazon PrivateLink in the *Amazon PrivateLink Guide*.

Considerations for Performance Insights

Before you set up an interface endpoint for Performance Insights, review Considerations in the *Amazon PrivateLink Guide*.

Performance Insights supports making calls to all of its API actions through the interface endpoint.

By default, full access to Performance Insights is allowed through the interface endpoint. To control traffic to Performance Insights through the interface endpoint, associate a security group with the endpoint network interfaces.

Availability

Performance Insights API currently supports VPC endpoints in Amazon Web Services Regions that support Performance Insights. For information about Performance Insights availability, see Supported Regions and Aurora DB engines for Database Insights.

Create an interface endpoint for Performance Insights

You can create an interface endpoint for Performance Insights using either the Amazon VPC console or the Amazon Command Line Interface (Amazon CLI). For more information, see Create an interface endpoint in the *Amazon PrivateLink Guide*.

Create an interface endpoint for Performance Insights using the following service name:

If you enable private DNS for the interface endpoint, you can make API requests to Performance Insights using its default Regional DNS name. For example, `pi.us-east-1.amazonaws.com`.

Creating a VPC endpoint policy for Performance Insights API

An endpoint policy is an IAM resource that you can attach to an interface endpoint. The default endpoint policy allows full access to Performance Insights through the interface endpoint. To control the access allowed to Performance Insights from your VPC, attach a custom endpoint policy to the interface endpoint.

An endpoint policy specifies the following information:

- The principals that can perform actions (Amazon Web Services accounts, IAM users, and IAM roles).
- The actions that can be performed.
- The resources on which the actions can be performed.

For more information, see Control access to services using endpoint policies in the *Amazon PrivateLink Guide*.

Example: VPC endpoint policy for Performance Insights actions

The following is an example of a custom endpoint policy. When you attach this policy to your interface endpoint, it grants access to the listed Performance Insights actions for all principals on all resources.

```
{
   "Statement":[
      {
         "Principal":"*",
         "Effect":"Allow",
         "Action":[
            "pi:CreatePerformanceAnalysisReport",
            "pi:DeletePerformanceAnalysisReport",
            "pi:GetPerformanceAnalysisReport"
         ],
         "Resource":"*"
      }
   ]
}
```

Example: VPC endpoint policy that denies all access from a specified Amazon account

The following VPC endpoint policy denies Amazon account 123456789012 all access to resources using the endpoint. The policy allows all actions from other accounts.

```
{
  "Statement": [
    {
      "Action": "*",
      "Effect": "Allow",
      "Resource": "*",
      "Principal": "*"
    },
    {
      "Action": "*",
      "Effect": "Deny",
      "Resource": "*",
      "Principal": { "AWS": [ "123456789012" ] }
     }
   ]
}
```

IP addressing for Performance Insights

IP addresses enable resources in your VPC to communicate with each other, and with resources over the internet. Performance Insights supports both IPv4 and IPv6 addressing protocols. By default, Performance Insights and Amazon VPC use the IPv4 addressing protocol. You can't turn off

this behavior. When you create a VPC, make sure to specify an IPv4 CIDR block (a range of private IPv4 addresses).

You can optionally assign an IPv6 CIDR block to your VPC and subnets, and assign IPv6 addresses from that block to RDS resources in your subnet. Support for the IPv6 protocol expands the number of supported IP addresses. By using the IPv6 protocol, you ensure that you have sufficient available addresses for the future growth of the internet. New and existing RDS resources can use IPv4 and IPv6 addresses within your VPC. Configuring, securing, and translating network traffic between the two protocols used in different parts of an application can cause operational overhead. You can standardize on the IPv6 protocol for Amazon RDS resources to simplify your network configuration. For more information about service endpoints and quotas, see Amazon Relational Database Service endpoints and quotas.

For more information about Aurora IP addressing, see Aurora IP addressing.

Analyzing Aurora performance anomalies with Amazon DevOps Guru for Amazon RDS

Amazon DevOps Guru is a fully managed operations service that helps developers and operators improve the performance and availability of their applications. DevOps Guru offloads the tasks associated with identifying operational issues so that you can quickly implement recommendations to improve your application. For more information, see What is Amazon DevOps Guru? in the *Amazon DevOps Guru User Guide*.

DevOps Guru detects, analyzes, and makes recommendations for existing operational issues for all Amazon RDS DB engines. DevOps Guru for RDS extends this capability by applying machine learning to detailed per-query and database counter metrics (exposed through the Performance Insights API) for Amazon Aurora databases. These monitoring features allow DevOps Guru for RDS to detect and diagnose performance bottlenecks and recommend specific corrective actions. DevOps Guru for RDS can also detect problematic conditions in your Aurora databases before they occur.

You can now view these recommendations in RDS console. For more information, see Recommendations from Amazon Aurora.

> **Important**
>
> Amazon DevOps Guru isn't available for Aurora Serverless DB clusters.

The following video is an overview of DevOps Guru for RDS.

For a deep dive on this subject, see Amazon DevOps Guru for RDS under the hood.

Topics

- Benefits of DevOps Guru for RDS
- How DevOps Guru for RDS works
- Setting up DevOps Guru for RDS

Benefits of DevOps Guru for RDS

If you're responsible for an Amazon Aurora database, you might not know that an event or regression that is affecting that database is occurring. When you learn about the issue, you might not know why it's occurring or what to do about it. Rather than turning to a database administrator (DBA) for help or relying on third-party tools, you can follow recommendations from DevOps Guru for RDS.

You gain the following advantages from the detailed analysis of DevOps Guru for RDS:

Fast diagnosis

DevOps Guru for RDS continuously monitors and analyzes database telemetry. Performance Insights, Enhanced Monitoring, and Amazon CloudWatch collect telemetry data for your database cluster. DevOps Guru for RDS uses statistical and machine learning techniques to mine this data and detect anomalies. To learn more about telemetry data, see Monitoring DB load with Performance Insights on Amazon Aurora and Monitoring OS metrics with Enhanced Monitoring in the *Amazon Aurora User Guide* .

Fast resolution

Each anomaly identifies the performance issue and suggests avenues of investigation or corrective actions. For example, DevOps Guru for RDS might recommend that you investigate specific wait events. Or it might recommend that you tune your application pool settings to limit the number of database connections. Based on these recommendations, you can resolve performance issues more quickly than by troubleshooting manually.

Proactive insights

DevOps Guru for RDS uses metrics from your resources to detect potentially problematic behavior before it becomes a bigger problem. For example, it can detect when your database is using an increasing number of on-disk temporary tables, which could start to impact performance. DevOps Guru then provides recommendations to help you address issues before they become bigger problems.

Deep knowledge of Amazon engineers and machine learning

To detect performance issues and help you resolve bottlenecks, DevOps Guru for RDS relies on machine learning (ML) and advanced mathematical formulas. Amazon database engineers contributed to the development of the DevOps Guru for RDS findings, which encapsulate many years of managing hundreds of thousands of databases. By drawing on this collective knowledge, DevOps Guru for RDS can teach you best practices.

How DevOps Guru for RDS works

DevOps Guru for RDS collects data about your Aurora databases from Amazon RDS Performance Insights. The most important metric is DBLoad. DevOps Guru for RDS consumes these detailed per-query and database counter metrics, analyzes them with machine learning, and publishes insights to the dashboard.

An *insight* is a collection of related anomalies that were detected by DevOps Guru.

In DevOps Guru for RDS, an *anomaly* is a pattern that deviates from what is considered normal performance for your Amazon Aurora database.

Proactive insights

A *proactive insight* lets you know about problematic behavior before it occurs. It contains anomalies with recommendations and related metrics to help you address issues in your Amazon Aurora databases before become bigger problems. These insights are published in the DevOps Guru dashboard.

For example, DevOps Guru might detect that your Aurora PostgreSQL database is creating many on-disk temporary tables. If not addressed, this trend might lead to performance issues. Each proactive insight includes recommendations for corrective behavior and links to relevant topics in either Tuning Aurora MySQL with Amazon DevOps Guru proactive insights or Tuning Aurora PostgreSQL with Amazon DevOps Guru proactive insights. For more information, see Working with insights in DevOps Guru in the *Amazon DevOps Guru User Guide*.

Reactive insights

A *reactive insight* identifies anomalous behavior as it occurs. If DevOps Guru for RDS finds performance issues in your Amazon Aurora DB instances, it publishes a reactive insight in the DevOps Guru dashboard. For more information, see Working with insights in DevOps Guru in the *Amazon DevOps Guru User Guide*.

Causal anomalies

A *causal anomaly* is a top-level anomaly within a reactive insight. **Database load (DB load)** is the causal anomaly for DevOps Guru for RDS.

An anomaly measures performance impact by assigning a severity level of **High**, **Medium**, or **Low**. To learn more, see Key concepts for DevOps Guru for RDS in the *Amazon DevOps Guru User Guide*.

If DevOps Guru detects a current anomaly on your DB instance, you're alerted in the **Databases** page of the RDS console. The console also alerts you to anomalies that occurred in the past 24 hours. To go to the anomaly page from the RDS console, choose the link in the alert message. The RDS console also alerts you in the page for your Amazon Aurora DB cluster .

Contextual anomalies

A *contextual anomaly* is a finding within **Database load (DB load)** that is related to a reactive insight. Each contextual anomaly describes a specific Amazon Aurora performance issue that requires investigation. For example, DevOps Guru for RDS might recommend that you consider increasing CPU capacity or investigate wait events that are contributing to DB load.

> **Important**
>
> We recommend that you test any changes on a test instance before modifying a production instance. In this way, you understand the impact of the change.

To learn more, see Analyzing anomalies in Amazon RDS in the *Amazon DevOps Guru User Guide*.

Setting up DevOps Guru for RDS

To allow DevOps Guru for Amazon RDS to publish insights for an Amazon Aurora database, complete the following tasks.

Topics

- Configuring IAM access policies for DevOps Guru for RDS
- Turning on Performance Insights for your Aurora DB instances
- Turning on DevOps Guru and specifying resource coverage

Configuring IAM access policies for DevOps Guru for RDS

To view alerts from DevOps Guru in the RDS console, your Amazon Identity and Access Management (IAM) user or role must have either of the following policies:

- The Amazon managed policy `AmazonDevOpsGuruConsoleFullAccess`
- The Amazon managed policy `AmazonDevOpsGuruConsoleReadOnlyAccess` and either of the following policies:

- The Amazon managed policy `AmazonRDSFullAccess`
- A customer managed policy that includes `pi:GetResourceMetrics` and `pi:DescribeDimensionKeys`

For more information, see Configuring access policies for Database Insights.

Turning on Performance Insights for your Aurora DB instances

DevOps Guru for RDS relies on Performance Insights for its data. Without Performance Insights, DevOps Guru publishes anomalies, but doesn't include the detailed analysis and recommendations.

When you create an Aurora DB cluster or modify a cluster instance, you can turn on Performance Insights. For more information, see Enabling and disabling detailed per-query and database counter metrics.

Turning on DevOps Guru and specifying resource coverage

You can turn on DevOps Guru to have it monitor your Amazon Aurora databases in either of the following ways.

Topics

- Turning on DevOps Guru in the RDS console
- Adding Aurora resources in the DevOps Guru console
- Adding Aurora resources using Amazon CloudFormation

Turning on DevOps Guru in the RDS console

You can take multiple paths in the Amazon RDS console to turn on DevOps Guru.

Topics


- Turning on DevOps Guru when you create an Aurora database
- Turning on DevOps Guru from the notification banner
- Responding to a permissions error when you turn on DevOps Guru

Turning on DevOps Guru when you create an Aurora database

The creation workflow includes a setting that turns on DevOps Guru coverage for your database. This setting is turned on by default when you choose the **Production** template.

To turn on DevOps Guru when you create an Aurora database

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Follow the steps in Creating a DB cluster, up to but not including the step where you choose monitoring settings.
3. In **Monitoring**, choose **Turn on Performance Insights**. For DevOps Guru for RDS to provide detailed analysis of performance anomalies, Performance Insights must be turned on.
4. Choose **Turn on DevOps Guru**.

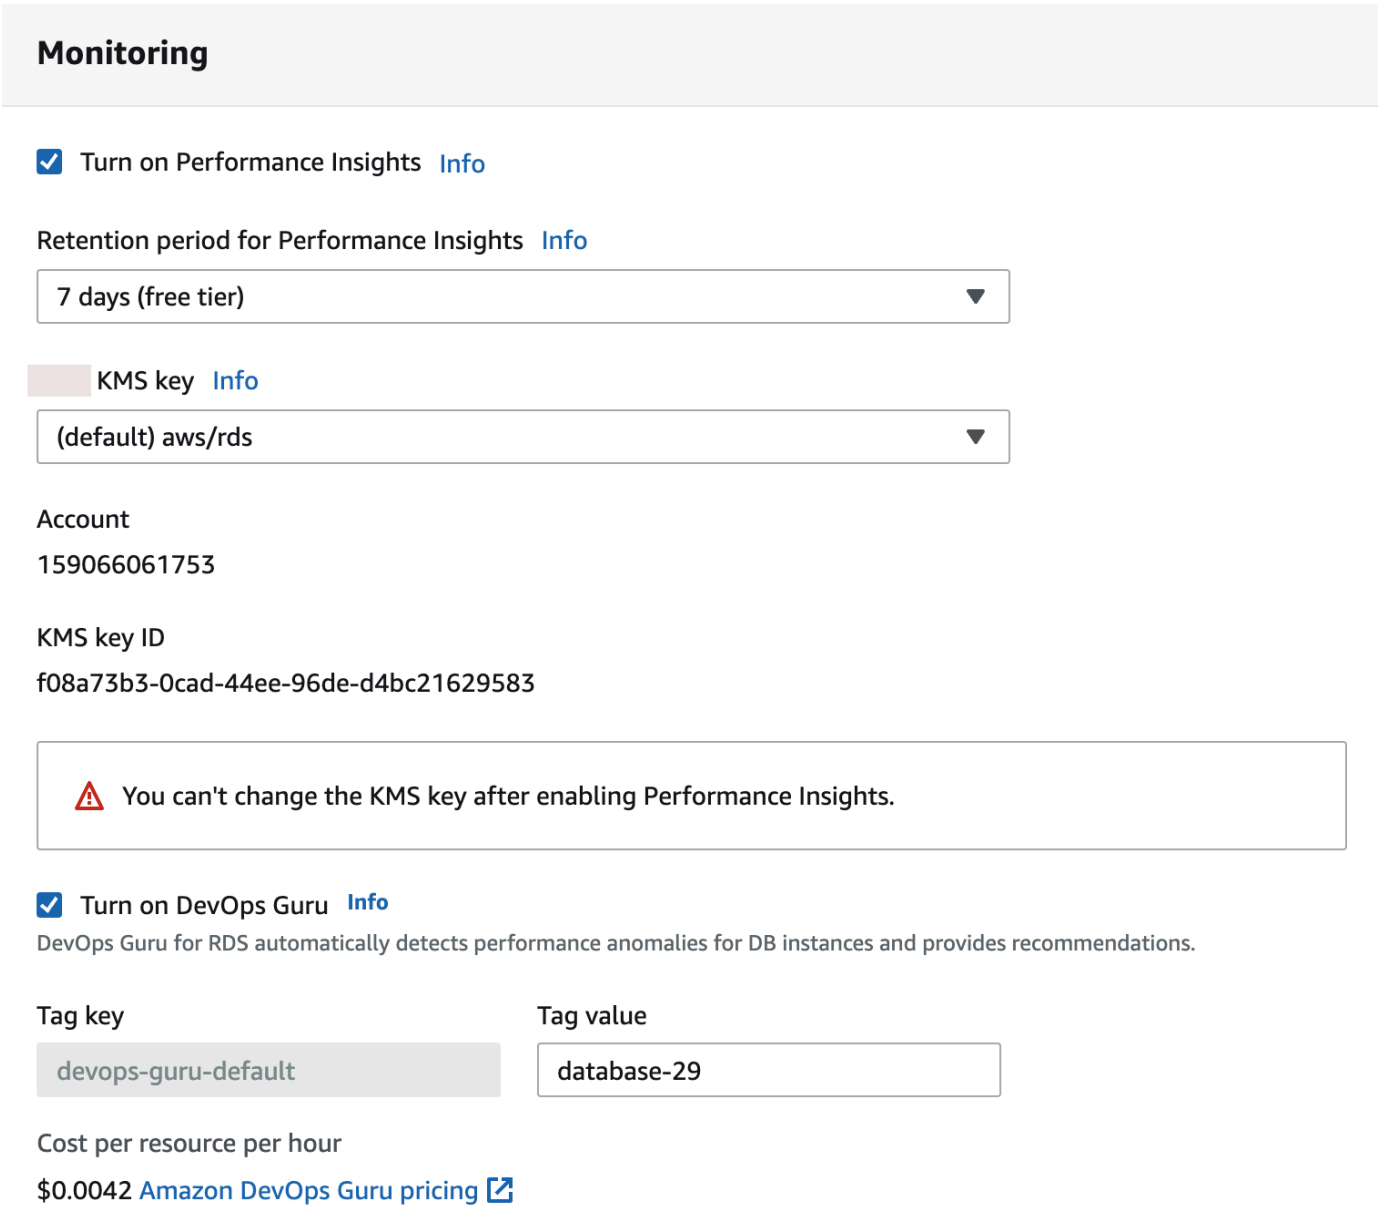

5. Create a tag for your database so that DevOps Guru can monitor it. Do the following:

   - In the text field for **Tag key**, enter a name that begins with **`Devops-Guru-`**.
   - In the text field for **Tag value**, enter any value. For example, if you enter **`rds-database-1`** for the name of your Aurora database, you can also enter **`rds-database-1`** as the tag value.


   For more information about tags, see "Use tags to identify resources in your DevOps Guru applications" in the *Amazon DevOps Guru User Guide*.

6. Complete the remaining steps in Creating a DB cluster.

Turning on DevOps Guru from the notification banner


If your resources aren't covered by DevOps Guru, Amazon RDS notifies you with a banner in the following locations:

- The **Monitoring** tab of a DB cluster instance
- The Performance Insights dashboard

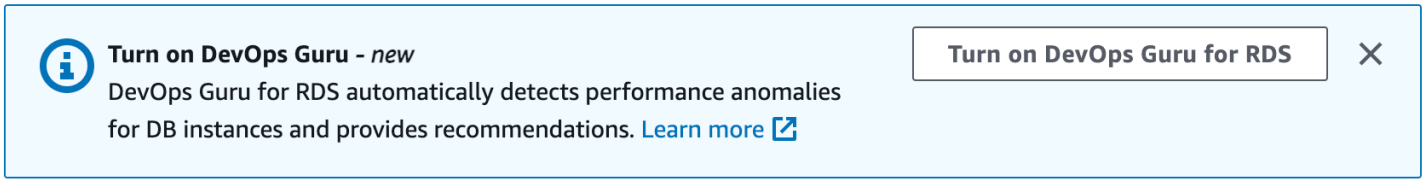

To turn on DevOps Guru for your Aurora database

1. In the banner, choose **Turn on DevOps Guru for RDS**.
2. Enter a tag key name and value. For more information about tags, see "Use tags to identify resources in your DevOps Guru applications" in the *Amazon DevOps Guru User Guide*.

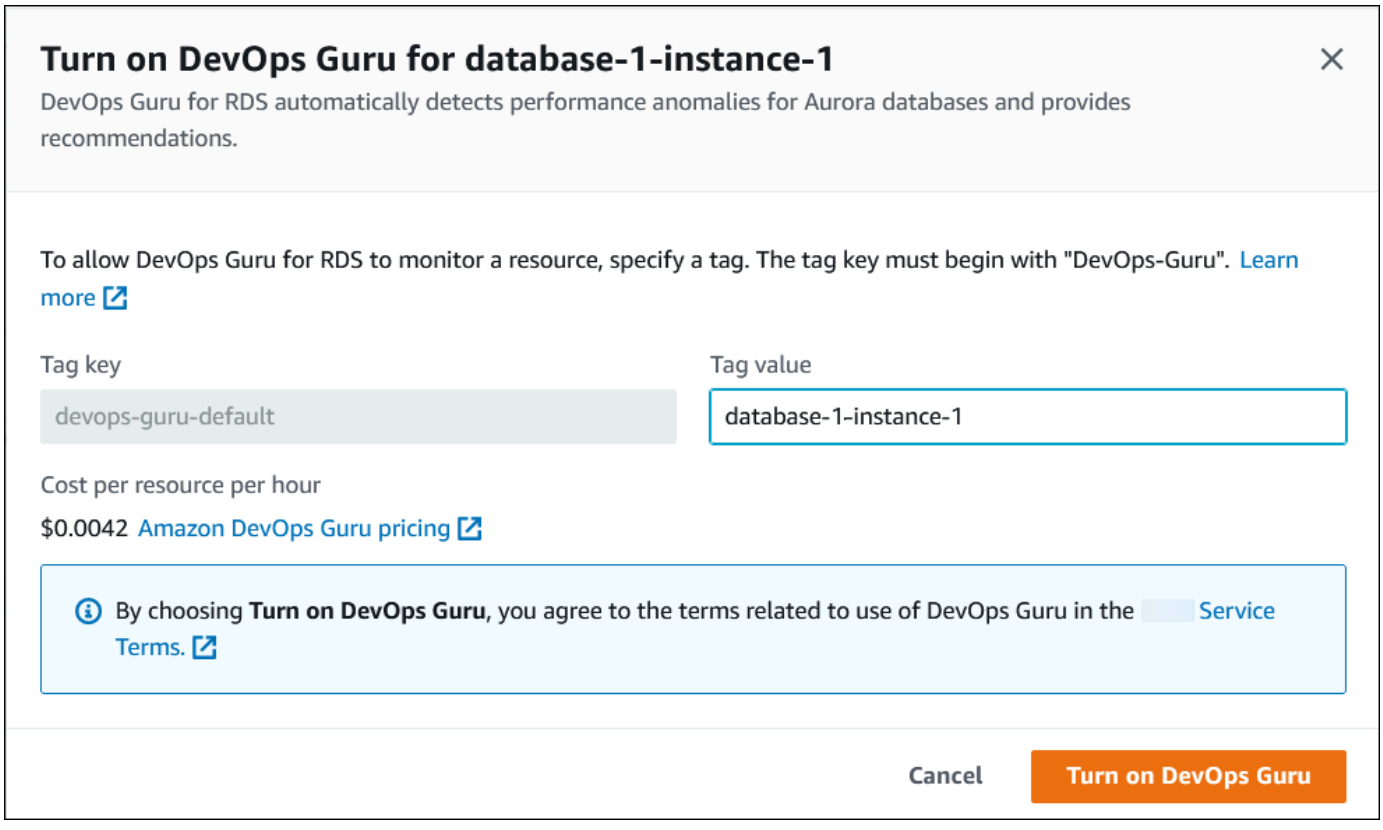

3. Choose **Turn on DevOps Guru**.


Responding to a permissions error when you turn on DevOps Guru

If you turn on DevOps Guru from the RDS console when you create a database, RDS might display the following banner about missing permissions.




To respond to a permissions error

1. Grant your IAM user or role the user managed role `AmazonDevOpsGuruConsoleFullAccess`. For more information, see Configuring IAM access policies for DevOps Guru for RDS.
2. Open the RDS console.
3. In the navigation pane, choose **Performance Insights**.
4. Choose a DB instance in the cluster that you just created.
5. Choose the switch to turn on **DevOps Guru for RDS**.

6. Choose a tag value. For more information, see "Use tags to identify resources in your DevOps Guru applications" in the *Amazon DevOps Guru User Guide*.

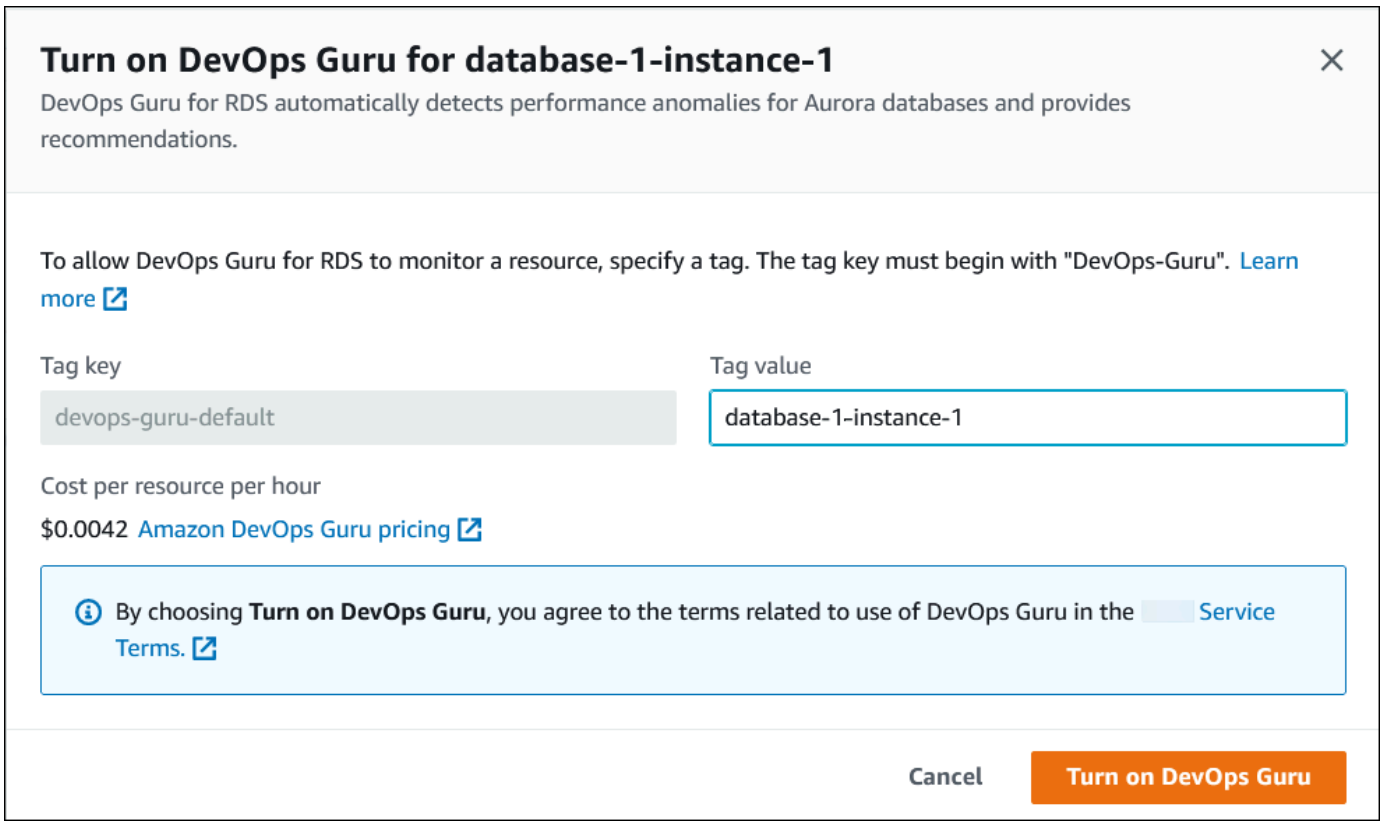

7. Choose **Turn on DevOps Guru**.

Adding Aurora resources in the DevOps Guru console

You can specify your DevOps Guru resource coverage on the DevOps Guru console. Follow the step described in Specify your DevOps Guru resource coverage in the *Amazon DevOps Guru User Guide*. When you edit your analyzed resources, choose one of the following options:

- Choose **All account resources** to analyze all supported resources, including the Aurora databases, in your Amazon Web Services account and Region.
- Choose **CloudFormation stacks** to analyze the Aurora databases that are in stacks you choose. For more information, see Use Amazon CloudFormation stacks to identify resources in your DevOps Guru applications in the *Amazon DevOps Guru User Guide*.
- Choose **Tags** to analyze the Aurora databases that you have tagged. For more information, see Use tags to identify resources in your DevOps Guru applications in the *Amazon DevOps Guru User Guide*.

For more information, see Enable DevOps Guru in the *Amazon DevOps Guru User Guide*.

Adding Aurora resources using Amazon CloudFormation

You can use tags to add coverage for your Aurora resources to your CloudFormation templates. The following procedure assumes that you have a CloudFormation template both for your Aurora DB instance and DevOps Guru stack.

To specify an Aurora DB instance using a CloudFormation tag

1. In the CloudFormation template for your DB instance, define a tag using a key/value pair.

   The following example assigns the value `my-aurora-db-instance1` to `Devops-guru-cfn-default` for an Aurora DB instance.

   ```
   MyAuroraDBInstance1:
     Type: "AWS::RDS::DBInstance"
     Properties:
       DBClusterIdentifier: my-aurora-db-cluster
       DBInstanceIdentifier: my-aurora-db-instance1
       Tags:
         - Key: Devops-guru-cfn-default
           Value: devopsguru-my-aurora-db-instance1
   ```

2. In the CloudFormation template for your DevOps Guru stack, specify the same tag in your resource collection filter.

   The following example configures DevOps Guru to provide coverage for the resource with the tag value `my-aurora-db-instance1`.

   ```
   DevOpsGuruResourceCollection:
     Type: AWS::DevOpsGuru::ResourceCollection
     Properties:
       ResourceCollectionFilter:
         Tags:
           - AppBoundaryKey: "Devops-guru-cfn-default"
             TagValues:
             - "devopsguru-my-aurora-db-instance1"
   ```

   The following example provides coverage for all resources within the application boundary `Devops-guru-cfn-default`.

   ```
   DevOpsGuruResourceCollection:
   ```

```
Type: AWS::DevOpsGuru::ResourceCollection
Properties:
  ResourceCollectionFilter:
    Tags:
      - AppBoundaryKey: "Devops-guru-cfn-default"
        TagValues:
        - "*"
```

For more information, see AWS::DevOpsGuru::ResourceCollection and AWS::RDS::DBInstance in the *Amazon CloudFormation User Guide*.

Monitoring OS metrics with Enhanced Monitoring

With Enhanced Monitoring, you can monitor the operating system of your DB instance in real time. When you want to see how different processes or threads use the CPU, Enhanced Monitoring metrics are useful.

Topics

- Overview of Enhanced Monitoring
- Setting up and enabling Enhanced Monitoring
- Viewing OS metrics in the RDS console
- Viewing OS metrics using CloudWatch Logs

Overview of Enhanced Monitoring

Amazon RDS provides metrics in real time for the operating system (OS) that your DB instance runs on. You can view all the system metrics and process information for your RDS DB instances on the console. You can manage which metrics you want to monitor for each instance and customize the dashboard according to your requirements. For descriptions of the Enhanced Monitoring metrics, see OS metrics in Enhanced Monitoring.

RDS delivers the metrics from Enhanced Monitoring into your Amazon CloudWatch Logs account. You can create metrics filters in CloudWatch from CloudWatch Logs and display the graphs on the CloudWatch dashboard. You can consume the Enhanced Monitoring JSON output from CloudWatch Logs in a monitoring system of your choice. For more information, see Enhanced Monitoring in the Amazon RDS FAQs.

Topics

- Differences between CloudWatch and Enhanced Monitoring metrics
- Retention of Enhanced Monitoring metrics
- Cost of Enhanced Monitoring

Differences between CloudWatch and Enhanced Monitoring metrics

A *hypervisor* creates and runs virtual machines (VMs). Using a hypervisor, an instance can support multiple guest VMs by virtually sharing memory and CPU. CloudWatch gathers metrics about CPU

utilization from the hypervisor for a DB instance. In contrast, Enhanced Monitoring gathers its metrics from an agent on the DB instance.

You might find differences between the CloudWatch and Enhanced Monitoring measurements, because the hypervisor layer performs a small amount of work. The differences can be greater if your DB instances use smaller instance classes. In this scenario, more virtual machines (VMs) are probably managed by the hypervisor layer on a single physical instance.

For descriptions of the Enhanced Monitoring metrics, see OS metrics in Enhanced Monitoring. For more information about CloudWatch metrics, see the *Amazon CloudWatch User Guide*.

Retention of Enhanced Monitoring metrics

By default, Enhanced Monitoring metrics are stored for 30 days in the CloudWatch Logs. This retention period is different from typical CloudWatch metrics.

To modify the amount of time the metrics are stored in the CloudWatch Logs, change the retention for the `RDSOSMetrics` log group in the CloudWatch console. For more information, see Change log data retention in CloudWatch logs in the *Amazon CloudWatch Logs User Guide*.

Cost of Enhanced Monitoring

Enhanced Monitoring metrics are stored in the CloudWatch Logs instead of in CloudWatch metrics. The cost of Enhanced Monitoring depends on the following factors:

- You are charged for Enhanced Monitoring only if you exceed the amount of data transfer and storage provided by Amazon CloudWatch Logs. Charges are based on CloudWatch Logs data transfer and storage rates.
- The amount of information transferred for an RDS instance is directly proportional to the defined granularity for the Enhanced Monitoring feature. A smaller monitoring interval results in more frequent reporting of OS metrics and increases your monitoring cost. To manage costs, set different granularities for different instances in your accounts.
- Usage costs for Enhanced Monitoring are applied for each DB instance that Enhanced Monitoring is enabled for. Monitoring a large number of DB instances is more expensive than monitoring only a few.
- DB instances that support a more compute-intensive workload have more OS process activity to report and higher costs for Enhanced Monitoring.

Setting up and enabling Enhanced Monitoring

To use Enhanced Monitoring, you must create an IAM role, and then enable Enhanced Monitoring.

Topics

- Creating an IAM role for Enhanced Monitoring
- Turning Enhanced Monitoring on and off
- Protecting against the confused deputy problem

Creating an IAM role for Enhanced Monitoring

Enhanced Monitoring requires permission to act on your behalf to send OS metric information to CloudWatch Logs. You grant Enhanced Monitoring permissions using an Amazon Identity and Access Management (IAM) role. You can either create this role when you enable Enhanced Monitoring or create it beforehand.

Topics

- Creating the IAM role when you enable Enhanced Monitoring
- Creating the IAM role before you enable Enhanced Monitoring

Creating the IAM role when you enable Enhanced Monitoring

When you enable Enhanced Monitoring in the RDS console, Amazon RDS can create the required IAM role for you. The role is named `rds-monitoring-role`. RDS uses this role for the specified DB instance, read replica, or Multi-AZ DB cluster.

To create the IAM role when enabling Enhanced Monitoring

1. Follow the steps in Turning Enhanced Monitoring on and off.
2. Set **Monitoring Role** to **Default** in the step where you choose a role.

Creating the IAM role before you enable Enhanced Monitoring

You can create the required role before you enable Enhanced Monitoring. When you enable Enhanced Monitoring, specify your new role's name. You must create this required role if you enable Enhanced Monitoring using the Amazon CLI or the RDS API.

The user that enables Enhanced Monitoring must be granted the `PassRole` permission. For more information, see Example 2 in Granting a user permissions to pass a role to an Amazon service in the *IAM User Guide*.

To create an IAM role for Amazon RDS enhanced monitoring

1. Open the IAM console at https://console.amazonaws.cn.
2. In the navigation pane, choose **Roles**.
3. Choose **Create role**.
4. Choose the **Amazon service** tab, and then choose **RDS** from the list of services.
5. Choose **RDS - Enhanced Monitoring**, and then choose **Next**.
6. Ensure that the **Permissions policies** shows **AmazonRDSEnhancedMonitoringRole**, and then choose **Next**.
7. For **Role name**, enter a name for your role. For example, enter **`emaccess`**.

   The trusted entity for your role is the Amazon service **monitoring.rds.amazonaws.com**.
8. Choose **Create role**.

Turning Enhanced Monitoring on and off

You can manage Enhanced Monitoring using the Amazon Web Services Management Console, Amazon CLI, or RDS API. You can set different granularities for metric collection on each DB cluster. You can also toggle Enhanced Monitoring for an existing DB cluster from the console.

Console

You can turn on Enhanced Monitoring when you create a DB cluster or read replica, or when you modify a DB cluster. If you modify a DB instance or cluster to turn on Enhanced Monitoring, you don't need to reboot your DB instance for the change to take effect.

You can turn on Enhanced Monitoring in the RDS console when you do one of the following actions in the **Databases** page:

- **Create a DB cluster** – Choose **Create database**.
- **Create a read replica** – Choose **Actions**, then **Create read replica**.
- **Modify a DB instance or DB cluster** – Choose **Modify**.


> **Note**
>
> When you enable Enhanced Monitoring for a DB cluster, you can't manage Enhanced Monitoring for individual DB instances within the cluster.

If you are managing Enhanced Monitoring for individual DB instances in a DB cluster and the granularity is set to different values for different instances, your DB cluster is heterogeneous with respect to Enhanced Monitoring. In such cases, you can't modify the DB cluster to manage Enhanced Monitoring at the cluster level.


To turn Enhanced Monitoring on or off in the RDS console

1. Scroll to **Additional configuration**.
2. In **Monitoring**, choose **Enable Enhanced Monitoring** for your DB , cluster, or read replica. Enabling Enhanced Monitoring at the cluster level allows you manage Enhanced Monitoring settings and options at the cluster level. Cluster level settings apply to all DB instances the cluster. Deselect the option to disable Enhanced Monitoring at the cluster level. You can later modify Enhanced Monitoring settings for individual DB instances in the cluster.

   In the **Create database** page, you can select to turn on Enhanced Monitoring at the cluster level.

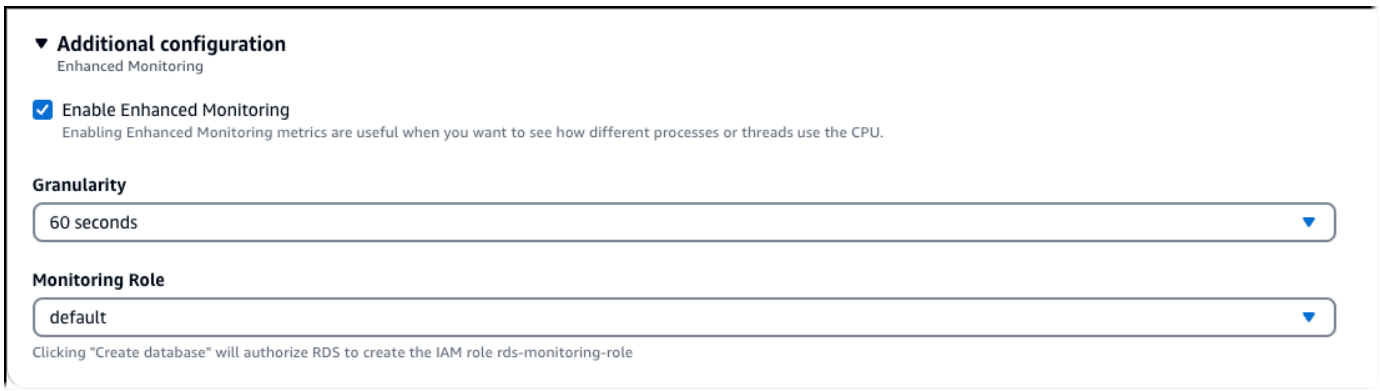   If you don't enable Enhanced Monitoring while creating a cluster, you can modify the cluster In the **Modify DB cluster** page.

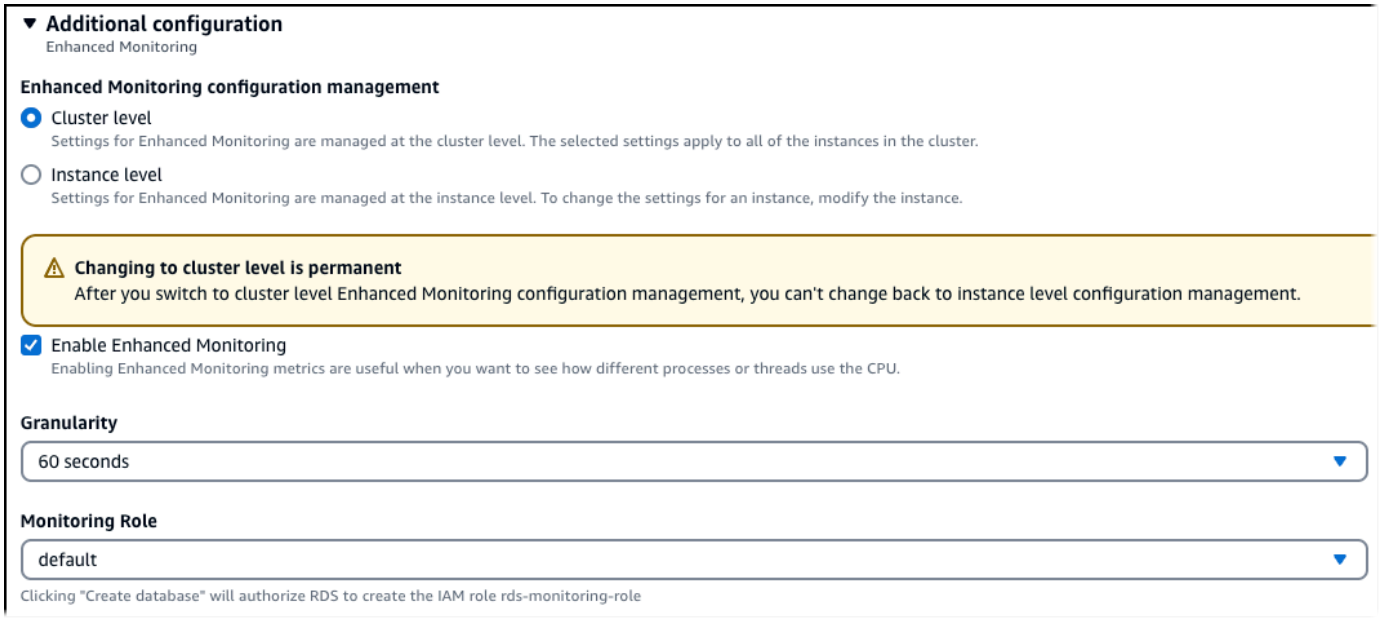

> **Note**
>
> You can't manage Enhanced Monitoring for an individual DB instance in a DB cluster that already has Enhanced Monitoring managed at the cluster level.

3. You can't choose to manage Enhanced Monitoring at the cluster level if the cluster is heterogeneous with respect to Enhanced Monitoring. To manage Enhanced Monitoring at the cluster level, change the Enhanced Monitoring settings for each instance so they match. You can now choose to manage Enhanced Monitoring at the cluster level when you modify your cluster.
4. Set the **Monitoring Role** property to the IAM role that you created to permit Amazon RDS to communicate with Amazon CloudWatch Logs for you, or choose **Default** to have RDS create a role for you named `rds-monitoring-role`.

> **Note**
>
> If role manager is enabled in your account, Amazon RDS attaches the role for you, and the role options described here are replaced by a **Customize** option. To use a different role, choose **Customize**. For more information, see IAM role creation in the *IAM User Guide*.

5. Set the **Granularity** property to the interval, in seconds, between points when metrics are collected for your DB instance, DB cluster, or read replica. The **Granularity** property can be set to one of the following values: 1, 5, 10, 15, 30, or 60.

   The fastest that the RDS console refreshes is every 5 seconds. If you set the granularity to 1 second in the RDS console, you still see updated metrics only every 5 seconds. You can retrieve 1-second metric updates by using CloudWatch Logs.

Amazon CLI

To turn on Enhanced Monitoring using the Amazon CLI, in the following commands, set the `--monitoring-interval` option to a value other than `0` and set the `--monitoring-role-arn` option to the role you created in Creating an IAM role for Enhanced Monitoring.

- create-db-cluster
- modify-db-cluster
- create-db-instance
- create-db-instance-read-replica
- modify-db-instance

The `--monitoring-interval` option specifies the interval, in seconds, between points when Enhanced Monitoring metrics are collected. Valid values for the option are `0`, `1`, `5`, `10`, `15`, `30`, and `60`.

To turn off Enhanced Monitoring using the Amazon CLI, set the `--monitoring-interval` option to `0` in these commands.

Example

The following example turns on Enhanced Monitoring for a DB instance:

For Linux, macOS, or Unix:

```
aws rds modify-db-instance \
    --db-instance-identifier mydbinstance \
    --monitoring-interval 30 \
    --monitoring-role-arn arn:aws-cn:iam::123456789012:role/emaccess
```

For Windows:

```
aws rds modify-db-instance ^
    --db-instance-identifier mydbinstance ^
    --monitoring-interval 30 ^
    --monitoring-role-arn arn:aws-cn:iam::123456789012:role/emaccess
```

Example

The following example turns on Enhanced Monitoring for a DB cluster:

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbinstance \
    --monitoring-interval 30 \
    --monitoring-role-arn arn:aws-cn:iam::123456789012:role/emaccess
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbinstance ^
    --monitoring-interval 30 ^
    --monitoring-role-arn arn:aws-cn:iam::123456789012:role/emaccess
```

Example

The following example turns on Enhanced Monitoring for a Multi-AZ DB cluster:

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbcluster \
    --monitoring-interval 30 \
    --monitoring-role-arn arn:aws-cn:iam::123456789012:role/emaccess
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --monitoring-interval 30 ^
```

```
    --monitoring-role-arn arn:aws-cn:iam::123456789012:role/emaccess
```

RDS API

To turn on Enhanced Monitoring using the RDS API, set the `MonitoringInterval` parameter to a value other than `0` and set the `MonitoringRoleArn` parameter to the role you created in Creating an IAM role for Enhanced Monitoring. Set these parameters in the following actions:

- CreateDBCluster
- ModifyDBCluster
- CreateDBInstance
- CreateDBInstanceReadReplica
- ModifyDBInstance

The `MonitoringInterval` parameter specifies the interval, in seconds, between points when Enhanced Monitoring metrics are collected. Valid values are `0`, `1`, `5`, `10`, `15`, `30`, and `60`.

To turn off Enhanced Monitoring using the RDS API, set `MonitoringInterval` to `0`.

Protecting against the confused deputy problem

The confused deputy problem is a security issue where an entity that doesn't have permission to perform an action can coerce a more-privileged entity to perform the action. In Amazon, cross-service impersonation can result in the confused deputy problem. Cross-service impersonation can occur when one service (the *calling service*) calls another service (the *called service*). The calling service can be manipulated to use its permissions to act on another customer's resources in a way it should not otherwise have permission to access. To prevent this, Amazon provides tools that help you protect your data for all services with service principals that have been given access to resources in your account. For more information, see The confused deputy problem.

To limit the permissions to the resource that Amazon RDS can give another service, we recommend using the `aws:SourceArn` and `aws:SourceAccount` global condition context keys in a trust policy for your Enhanced Monitoring role. If you use both global condition context keys, they must use the same account ID.

The most effective way to protect against the confused deputy problem is to use the `aws:SourceArn` global condition context key with the full ARN of the resource. For Amazon RDS, set `aws:SourceArn` to `arn:aws:rds:`*`Region`*`:`*`my-account-id`*`:db:`*`dbname`*.

The following example uses the `aws:SourceArn` and `aws:SourceAccount` global condition context keys in a trust policy to prevent the confused deputy problem.


JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {
        "Service": "monitoring.rds.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringLike": {
          "aws:SourceArn": "arn:aws-cn:rds:Region:my-123456789012:db:dbname"
        },
        "StringEquals": {
          "aws:SourceAccount": "my-123456789012"
        }
      }
    }
  ]
}
```

Viewing OS metrics in the RDS console


You can view OS metrics reported by Enhanced Monitoring in the RDS console by choosing **Enhanced monitoring** for **Monitoring**.

The following example shows the Enhanced Monitoring page. For descriptions of the Enhanced Monitoring metrics, see OS metrics in Enhanced Monitoring.

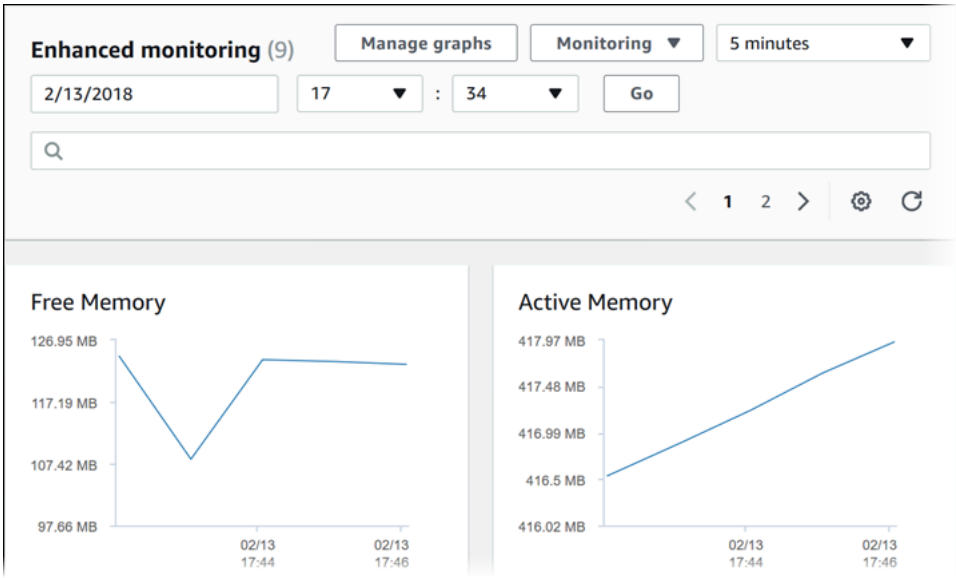

If you want to see details for the processes running on your DB instance, choose **OS process list** for **Monitoring**.

The **Process List** view is shown following.

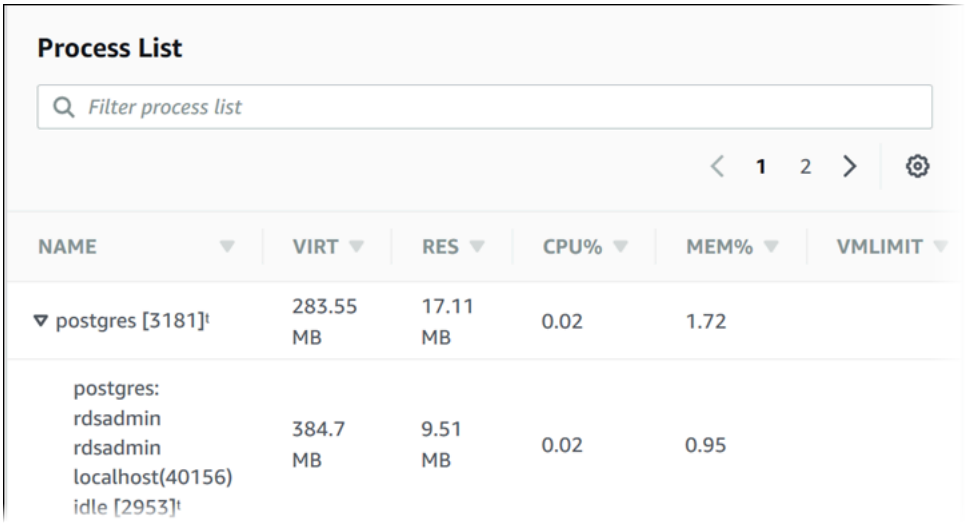

The Enhanced Monitoring metrics shown in the **Process list** view are organized as follows:

- **RDS child processes** – Shows a summary of the RDS processes that support the DB instance, for example `aurora` for Amazon Aurora DB clusters. Process threads appear nested beneath the parent process. Process threads show CPU utilization only as other metrics are the same for all threads for the process. The console displays a maximum of 100 processes and threads. The results are a combination of the top CPU consuming and memory consuming processes and threads. If there are more than 50 processes and more than 50 threads, the console displays the

top 50 consumers in each category. This display helps you identify which processes are having the greatest impact on performance.

- **RDS processes** – Shows a summary of the resources used by the RDS management agent, diagnostics monitoring processes, and other Amazon processes that are required to support RDS DB instances.
- **OS processes** – Shows a summary of the kernel and system processes, which generally have minimal impact on performance.

The items listed for each process are:

- **VIRT** – Displays the virtual size of the process.
- **RES** – Displays the actual physical memory being used by the process.
- **CPU%** – Displays the percentage of the total CPU bandwidth being used by the process.
- **MEM%** – Displays the percentage of the total memory being used by the process.

The monitoring data that is shown in the RDS console is retrieved from Amazon CloudWatch Logs. You can also retrieve the metrics for a DB instance as a log stream from CloudWatch Logs. For more information, see Viewing OS metrics using CloudWatch Logs.

Enhanced Monitoring metrics are not returned during the following:

- A failover of the DB instance.
- Changing the instance class of the DB instance (scale compute).

Enhanced Monitoring metrics are returned during a reboot of a DB instance because only the database engine is rebooted. Metrics for the operating system are still reported.

Viewing OS metrics using CloudWatch Logs

After you have enabled Enhanced Monitoring for your DB cluster, you can view the metrics for it using CloudWatch Logs, with each log stream representing a single DB instance or DB cluster being monitored. The log stream identifier is the resource identifier (`DbiResourceId`) for the DB instance or DB cluster.

To view Enhanced Monitoring log data

1. Open the CloudWatch console at https://console.amazonaws.cn/cloudwatch/.

2. If necessary, choose the Amazon Web Services Region that your DB cluster is in. For more information, see Regions and endpoints in the *Amazon Web Services General Reference*.
3. Choose **Logs** in the navigation pane.
4. Choose **RDSOSMetrics** from the list of log groups.
5. Choose the log stream that you want to view from the list of log streams.

Metrics reference for Amazon Aurora

In this reference, you can find descriptions of Amazon Aurora metrics for Amazon CloudWatch, the Performance Insights API, and Enhanced Monitoring.

Topics

- Amazon CloudWatch metrics for Amazon Aurora
- Amazon CloudWatch dimensions for Aurora
- Availability of Aurora metrics in the Amazon RDS console
- Amazon CloudWatch metrics for Amazon RDS Performance Insights
- Detailed Database Metrics
- SQL statistics for Performance Insights
- OS metrics in Enhanced Monitoring

Amazon CloudWatch metrics for Amazon Aurora

The AWS/RDS namespace includes the following metrics that apply to database entities running on Amazon Aurora. Some metrics apply to either Aurora MySQL, Aurora PostgreSQL, or both. Furthermore, some metrics are specific to a DB cluster, primary DB instance, replica DB instance, or all DB instances.

For Aurora global database metrics, see Amazon CloudWatch metrics for write forwarding in Aurora MySQL and Amazon CloudWatch metrics for write forwarding in Aurora PostgreSQL. For Aurora parallel query metrics, see Monitoring parallel query for Aurora MySQL.

Topics

- Cluster-level metrics for Amazon Aurora
- Instance-level metrics for Amazon Aurora
- Amazon CloudWatch usage metrics for Amazon Aurora

Cluster-level metrics for Amazon Aurora

The following table describes metrics that are specific to Aurora clusters.

Metric	Description	Applies to	Units
`AuroraGlobalDBDataTransferBytes`	In an Aurora Global Database, the amount of redo log data transferred from the source Amazon Region to a secondary Amazon Region. **Note** This metric is available only in secondary Amazon Web Services Regions.	Aurora MySQL and Aurora PostgreSQL	Bytes
`AuroraGlobalDBProgressLag`	In an Aurora Global Database, the measure of how far the secondary cluster's storage volume is behind the primary cluster's storage volume for both user transactions and system transactions. **Note** This metric is available only in secondary Amazon Web Services Regions.	Aurora MySQL and Aurora PostgreSQL	Milliseconds
`AuroraGlobalDBReplicatedWriteIO`	In an Aurora Global Database, the number	Aurora MySQL	Count

Metric	Description	Applies to	Units
	of write I/O operations replicated from the primary Amazon Region to the cluster volume in a secondary Amazon Region. The billing calculations for the secondary Amazon Regions in a global database use `VolumeWriteIOPs` to account for writes performed within the cluster. The billing calculations for the primary Amazon Region in a global database use `VolumeWriteIOPs` to account for the write activity within that cluster, and `AuroraGlobalDBReplicatedWriteIO` to account for cross-Region replication within the global database. **Note** This metric is available only in secondary Amazon Web Services Regions.	and Aurora PostgreSQL	

Metric	Description	Applies to	Units
`AuroraGlobalDBReplicationLag`	For an Aurora Global Database, the average time elapsed replicating updates between the primary cluster's replication server and the secondary cluster's replication server. **Note** This metric is available only in secondary Amazon Web Services Regions.	Aurora MySQL and Aurora PostgreSQL	Milliseconds
`AuroraGlobalDBRPOLag`	In an Aurora Global Database, the recovery point objective (RPO) lag time. This metric measures how far the secondary cluster is behind the primary cluster for user transactions. **Note** This metric is available only in secondary Amazon Web Services Regions.	Aurora MySQL and Aurora PostgreSQL	Milliseconds

Metric	Description	Applies to	Units
`AuroraVolumeBytesLeftTotal`	The remaining available space for the cluster volume. As the cluster volume grows, this value decreases. If it reaches zero, the cluster reports an out-of-space error. To detect whether your Aurora MySQL cluster is approaching the maximum cluster volume size for its engine version (up to 256 tebibytes (TiB)), monitor this value instead of `VolumeBytesUsed` , which is less reliable. For the maximum size for each engine version, see Amazon Aurora size limits. `AuroraVolumeBytesLeftTotal` takes into account storage used for internal housekeeping and other allocations that don't affect your storage billing.	Aurora MySQL	Bytes
`BacktrackChangeRecordsCreationRate`	The number of backtrack change records created over 5 minutes for your DB cluster.	Aurora MySQL	Count per 5 minutes
`BacktrackChangeRecordsStored`	The number of backtrack change records used by your DB cluster.	Aurora MySQL	Count

Metric	Description	Applies to	Units
`BackupRetentionPeriodStorageUsed`	The total amount of backup storage used to support the point-in-time restore feature within the Aurora DB cluster's backup retention window. This amount is included in the total reported by the `TotalBackupStorageBilled` metric. It is computed separately for each Aurora cluster. For instructions, see Understanding Amazon Aurora backup storage usage.	Aurora MySQL and Aurora PostgreSQL	Bytes
`ServerlessDatabaseCapacity`	The current capacity of an Aurora Serverless DB cluster.	Aurora MySQL and Aurora PostgreSQL	Count

Metric	Description	Applies to	Units
SnapshotStorageUsed	The total amount of backup storage consumed by all Aurora snapshots for an Aurora DB cluster outside its backup retention window. This amount is included in the total reported by the TotalBackupStorageBilled metric. It is computed separately for each Aurora cluster. For instructions, see Understanding Amazon Aurora backup storage usage.	Aurora MySQL and Aurora PostgreSQL	Bytes
TotalBackupStorageBilled	The total amount of backup storage in bytes for which you are billed for a given Aurora DB cluster. The metric includes the backup storage measured by the BackupRetentionPeriodStorageUsed and SnapshotStorageUsed metrics. This metric is computed separately for each Aurora cluster. For instructions, see Understanding Amazon Aurora backup storage usage.	Aurora MySQL and Aurora PostgreSQL	Bytes

Metric	Description	Applies to	Units
`VolumeBytesUsed`	The amount of storage used by your Aurora DB cluster. This value affects the cost of the Aurora DB cluster (for pricing information, see the Amazon RDS pricing page). This value doesn't reflect some internal storage allocations that don't affect storage billing. For Aurora MySQL you can anticipat e out-of-space issues more accurately by testing whether `AuroraVol umeBytesLeftTotal` is approaching zero instead of comparing `VolumeByt esUsed` against the maximum cluster volume size for its engine version. For clusters that are clones, the value of this metric depends on the amount of data added or changed on the clone. The metric can also increase or decrease when the original cluster is deleted, or as new clones are added or deleted. For details, see Deleting a source cluster volume	Aurora MySQL and Aurora PostgreSQL	Bytes

Metric	Description	Applies to	Units
	Note that it doesn't make sense to choose a `--period` value that's small, because Amazon RDS collects this metrics at intervals, not continuously.		

Metric	Description	Applies to	Units
VolumeReadIOPs	The number of billed read I/O operations from a cluster volume within a 5-minute interval. Billed read operations are calculated at the cluster volume level, aggregated from all instances in the Aurora DB cluster, and then reported at 5-minute intervals. The value is calculated by taking the value of the **Read operations** metric over a 5-minute period. You can determine the amount of billed read operations per second by taking the value of the **Billed read operations** metric and dividing by 300 seconds. For example, if the **Billed read operations** returns 13,686, then the billed read operations per second is 45 (13,686 / 300 = 45.62). You accrue billed read operations for queries that request database pages that aren't in the buffer cache and must be loaded from storage. You might see spikes in billed read	Aurora MySQL and Aurora PostgreSQL	Count per 5 minutes

Metric	Description	Applies to	Units
	operations as query results are read from storage and then loaded into the buffer cache. Note that it doesn't make sense to choose a `--period` value that's small, because Amazon RDS collects this metrics at intervals, not continuously. **Tip** If your Aurora MySQL cluster uses parallel query, you might see an increase in `VolumeReadIOPS` values. Parallel queries don't use the buffer pool. Thus, although the queries are fast, this optimized processin g can result in an increase in read operations and associated charges.		

Metric	Description	Applies to	Units
VolumeWriteIOPs	The number of write disk I/O operations to the cluster volume, reported at 5-minute intervals. For a detailed description of how billed write operations are calculated, see VolumeReadIOPs . Note that it doesn't make sense to choose a --period value that's small, because Amazon RDS collects this metrics at intervals, not continuously.	Aurora MySQL and Aurora PostgreSQL	Count per 5 minutes

Instance-level metrics for Amazon Aurora

The following instance-specific Amazon CloudWatch metrics apply to all Aurora MySQL and Aurora PostgreSQL instances unless noted otherwise.

Metric	Description	Applies to	Units
AbortedClients	The number of client connections that have not been closed properly.	Aurora MySQL	Count
ActiveTransactions	The average number of current transactions executing on an Aurora database instance per second. Aurora doesn't enable this metric by default in versions	Aurora MySQL	Count per second

Metric	Description	Applies to	Units
	prior to 3.08. To begin measuring this value, set `innodb_monitor_enable='all'` in the DB parameter group for a specific DB instance. In versions 3.08 and later, the value is sourced from internal tables by default and doesn't require the InnoDB monitor to be enabled.		
`ACUUtilization`	The value of the `ServerlessDatabaseCapacity` metric divided by the maximum ACU value of the DB cluster. This metric is applicable only for Aurora serverless.	Aurora MySQL and Aurora PostgreSQL	Percentage

Metric	Description	Applies to	Units
AuroraBinlogReplicaLag	The amount of time that a binary log replica DB cluster running on Aurora MySQL lags behind the binary log replication source. A lag means that the source is generating records faster than the replica can apply them. This metric reports different values depending on the engine version: **Aurora MySQL version 2** The Seconds_Behind_Master field of the MySQL SHOW SLAVE STATUS **Aurora MySQL version 3** SHOW REPLICA STATUS You can use this metric to monitor errors and replica lag in a cluster that acts as a binary log replica. The metric value indicates the following: **A high value** The replica is lagging the replication source.	Primary for Aurora MySQL	Seconds

Metric	Description	Applies to	Units
	`0` or a value close to `0` The replica process is active and current. **`-1`** Aurora can't determine the lag, which can happen during replica setup or when the replica is in an error state. Because binary log replicati on only occurs on the writer instance of the cluster, we recommend using the version of this metric associated with the WRITER role. For more information about administering replication, see Replicating Amazon Aurora MySQL DB clusters across Amazon Web Services Regions. For more informati on about troubleshooting, see Amazon Aurora MySQL replication issues.		
`AuroraDMLRejectedM asterFull`	The number of forwarded queries that are rejected because the session is full on the writer DB instance.	Primary for Aurora MySQL version 2	Count

Metric	Description	Applies to	Units
AuroraDMLRejectedWriterFull	The number of forwarded queries that are rejected because the session is full on the writer DB instance.	Primary for Aurora MySQL version 3	Count
AuroraEstimatedSharedMemoryBytes	The estimated amount of shared buffer or buffer pool memory which was actively used during the last configured polling interval.	Aurora PostgreSQL	Bytes
AuroraMemoryHealthState	Indicates the memory health state. 0 means healthy (no memory pressure), 5 means moderate memory pressure, 10 means critical memory pressure. For more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases.	Aurora MySQL version 3.06.1 and higher	Gauge
AuroraMemoryNumDeclinedSqlTotal	The incremental number of queries declined as part of out-of-memory (OOM) avoidance. For more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases.	Aurora MySQL version 3.06.1 and higher	Count

Metric	Description	Applies to	Units
AuroraMemoryNumKillConnTotal	The incremental number of connections closed as part of OOM avoidance. For more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases.	Aurora MySQL version 3.06.1 and higher	Count
AuroraMemoryNumKillQueryTotal	The incremental number of queries ended as part of OOM avoidance. For more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases.	Aurora MySQL version 3.06.1 and higher	Count
AuroraMillisecondsSpentInOomRecovery	The amount of time since the memory health dropped below the normal state. For more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases.	Aurora MySQL version 3.08.0 and higher	Milliseconds
AuroraNumOomRecoverySuccessful	The number of times that the memory health was restored to the normal state. For more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases.	Aurora MySQL version 3.08.0 and higher	Count

Metric	Description	Applies to	Units
`AuroraNumOomRecoveryTriggered`	The number of times that the memory health dropped below the normal state. For more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases.	Aurora MySQL version 3.08.0 and higher	Count
`AuroraOptimizedReadsCacheHitRatio`	The percentage of requests that are served by the Optimized Reads cache. The value is calculated using the following formula: `orcache_blks_hit/ (orcache_blks_hit + storage_blks_read)` When `AuroraOptimizedReadsCacheHitRatio` is 100%, it means that all pages were read from the optimized reads cache. If the `AuroraOptimizedReadsCacheHitRatio` is `0`, it means that no pages were read from the optimized reads cache.	Primary for Aurora PostgreSQL	Percentage

Metric	Description	Applies to	Units
AuroraReplicaLag	In a single-region Aurora cluster or Global Database primary cluster, the amount of time elapsed replicating updates to a replica instance from the writer instance in the same region. In a Global Database secondary cluster, the amount of time elapsed replicating updates to the replica instance and the secondary cluster's replicati on server in the same region.	Replica for Aurora MySQL and Aurora PostgreSQL	Milliseconds
AuroraReplicaLagMa ximum	The maximum amount of lag between the primary instance and any of the Aurora DB instance in the DB cluster. When read replicas are deleted or renamed, there can be a temporary spike in replication lag as the old resource undergoes a recycling process. To obtain an accurate represent ation of the replication lag during that period, we recommend that you monitor the AuroraRep licaLag metric on each read replica instance.	Primary for Aurora MySQL and Aurora PostgreSQL	Milliseconds

Metric	Description	Applies to	Units
AuroraReplicaLagMinimum	The minimum amount of lag between the primary instance and any of the Aurora DB instance in the DB cluster.	Primary for Aurora MySQL and Aurora PostgreSQL	Milliseconds
AuroraSlowConnectionHandleCount	The number of connections that have waited two seconds or longer to start the handshake. This metric applies only to Aurora MySQL version 3.	Aurora MySQL	Count
AuroraSlowHandshakeCount	The number of connections that have taken 50 milliseconds or longer to finish the handshake. This metric applies only to Aurora MySQL version 3.	Aurora MySQL	Count
BacktrackWindowActual	The difference between the target backtrack window and the actual backtrack window.	Primary for Aurora MySQL	Minutes
BacktrackWindowAlert	The number of times that the actual backtrack window is smaller than the target backtrack window for a given period of time.	Primary for Aurora MySQL	Count
BlockedTransactions	The average number of transactions in the database that are blocked per second.	Aurora MySQL	Count per second

Metric	Description	Applies to	Units
BufferCacheHitRatio	The percentage of requests that are served by the buffer cache.	Aurora MySQL and Aurora PostgreSQL	Percentage
CommitLatency	The average duration taken by the engine and storage to complete the commit operations.	Aurora MySQL and Aurora PostgreSQL	Milliseconds
CommitThroughput	The average number of commit operations per second.	Aurora MySQL and Aurora PostgreSQL	Count per second
ConnectionAttempts	The number of attempts to connect to an instance, whether successful or not.	Aurora MySQL	Count

Metric	Description	Applies to	Units
`CPUCreditBalance`	The number of CPU credits that an instance has accumulated, reported at 5-minute intervals. You can use this metric to determine how long a DB instance can burst beyond its baseline performance level at a given rate. This metric applies only to these instance classes: • Aurora MySQL: `db.t2.small` , `db.t2.medium` , `db.t3`, and `db.t4g` • Aurora PostgreSQL: `db.t3` and `db.t4g` **Note** We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see DB instance class types.	Aurora MySQL and Aurora PostgreSQL	Count

Metric	Description	Applies to	Units
	Launch credits work the same way in Amazon RDS as they do in Amazon EC2. For more information, see Launch credits in the *Amazon Elastic Compute Cloud User Guide for Linux Instances*.		

Metric	Description	Applies to	Units
`CPUCreditUsage`	The number of CPU credits consumed during the specified period, reported at 5-minute intervals. This metric measures the amount of time during which physical CPUs have been used for processing instructi ons by virtual CPUs allocated to the DB instance. This metric applies only to these instance classes: • Aurora MySQL: `db.t2.small` , `db.t2.medium` , `db.t3`, and `db.t4g` • Aurora PostgreSQL: `db.t3` and `db.t4g` **Note** We recommend using the T DB instance classes only for development and test servers, or other non-produ ction servers. For more details on the T instance classes,	Aurora MySQL and Aurora PostgreSQL	Count

Metric	Description	Applies to	Units
	see DB instance class types.		
`CPUSurplusCreditBalance`	The number of surplus credits that have been spent by an unlimited instance when its `CPUCreditBalance` value is zero. The `CPUSurplusCreditBalance` value is paid down by earned CPU credits. If the number of surplus credits exceeds the maximum number of credits that the instance can earn in a 24-hour period, the spent surplus credits above the maximum incur an additional charge. CPU credit metrics are available at a 5-minute frequency only.	Aurora MySQL and Aurora PostgreSQL	Credits (vCPU-minutes)

Metric	Description	Applies to	Units
`CPUSurplusCreditsCharged`	The number of spent surplus credits that are not paid down by earned CPU credits, and which thus incur an additional charge. Spent surplus credits are charged when any of the following occurs: • The spent surplus credits exceed the maximum number of credits that the instance can earn in a 24-hour period. Spent surplus credits above the maximum are charged at the end of the hour. • The instance is stopped or terminated. • The instance is switched from `unlimited` to `standard`. CPU credit metrics are available at a 5-minute frequency only.	Aurora MySQL and Aurora PostgreSQL	Credits (vCPU-minutes)
`CPUUtilization`	The percentage of CPU used by an Aurora DB instance.	Aurora MySQL and Aurora PostgreSQL	Percentage

Metric	Description	Applies to	Units
DatabaseConnections	The number of client network connections to the database instance. The number of database sessions can be higher than the metric value because the metric value doesn't include the following: • Sessions that no longer have a network connectio n but which the database hasn't cleaned up • Sessions created by the database engine for its own purposes • Sessions created by the database engine's parallel execution capabilities • Sessions created by the database engine job scheduler • Amazon Aurora connectio ns	Aurora MySQL and Aurora PostgreSQL	Count
DDLLatency	The average duration of requests such as example, create, alter, and drop requests.	Aurora MySQL	Milliseconds
DDLThroughput	The average number of DDL requests per second.	Aurora MySQL	Count per second

Metric	Description	Applies to	Units
`Deadlocks`	The average number of deadlocks in the database per second.	Aurora MySQL and Aurora PostgreSQL	Count per second
`DeleteLatency`	The average duration of delete operations.	Aurora MySQL	Milliseconds
`DeleteThroughput`	The average number of delete queries per second.	Aurora MySQL	Count per second
`DiskQueueDepth`	The number of outstanding read/write requests waiting to access the disk.	Aurora MySQL and Aurora PostgreSQL	Count
`DMLLatency`	The average duration of inserts, updates, and deletes.	Aurora MySQL	Milliseconds
`DMLThroughput`	The average number of inserts, updates, and deletes per second.	Aurora MySQL	Count per second
`EngineUptime`	The amount of time that the instance has been running.	Aurora MySQL and Aurora PostgreSQL	Seconds
`FreeableMemory`	The amount of available random access memory. For Aurora MySQL and Aurora PostgreSQL databases, this metric reports the value of the `MemAvailable` field of `/proc/meminfo`.	Aurora MySQL and Aurora PostgreSQL	Bytes

Metric	Description	Applies to	Units
FTSCacheMemoryUsed	The total memory used by the InnoDB Full-Text Search (FTS) cache across all tables on the DB instance.	Aurora MySQL	Bytes
FreeEphemeralStorage	The amount of available Ephemeral NVMe storage.	Aurora PostgreSQL	Bytes
FreeLocalStorage	The amount of local storage available. Unlike for other DB engines, for Aurora DB instances this metric reports the amount of storage available to each DB instance. This value depends on the DB instance class (for pricing information, see the Amazon RDS pricing page). You can increase the amount of free storage space for an instance by choosing a larger DB instance class for your instance. (This doesn't apply to Aurora serverless.)	Aurora MySQL and Aurora PostgreSQL	Bytes
InsertLatency	The average duration of insert operations.	Aurora MySQL	Milliseconds
InsertThroughput	The average number of insert operations per second.	Aurora MySQL	Count per second

Metric	Description	Applies to	Units
`LoginFailures`	The average number of failed login attempts per second.	Aurora MySQL	Count per second
`MaximumUsedTransactionIDs`	The age of the oldest unvacuumed transaction ID, in transactions. If this value reaches 2,146,483,648 (2^31 - 1,000,000), the database is forced into read-only mode, to avoid transaction ID wraparound. For more information, see Preventing transaction ID wraparound failures in the PostgreSQL documentation. This metric excludes databases that PostgreSQL has marked as invalid. An invalid database has a `datconnlimit` value of `-2` in `pg_catalog.pg_database`, for example after an interrupted `DROP DATABASE` operation. Autovacuum ignores invalid databases, so they don't contribute to transaction ID wraparound. To remove an invalid database, use `DROP DATABASE` again.	Aurora PostgreSQL	Count

Metric	Description	Applies to	Units
NetworkReceiveThroughput	The amount of network throughput received from clients by each instance in the Aurora DB cluster. This throughput doesn't include network traffic between instances in the Aurora DB cluster and the cluster volume.	Aurora MySQL and Aurora PostgreSQL	Bytes per second (console shows Megabytes per second)
NetworkThroughput	The amount of network throughput both received from and transmitted to clients by each instance in the Aurora DB cluster. This throughput doesn't include network traffic between instances in the Aurora DB cluster and the cluster volume.	Aurora MySQL and Aurora PostgreSQL	Bytes per second
NetworkTransmitThroughput	The amount of network throughput sent to clients by each instance in the Aurora DB cluster. This throughput doesn't include network traffic between instances in the DB cluster and the cluster volume.	Aurora MySQL and Aurora PostgreSQL	Bytes per second (console shows Megabytes per second)
NumBinaryLogFiles	The number of binlog files generated.	Aurora MySQL	Count

Metric	Description	Applies to	Units
NumUndoRowOperations	The total number of rows modified in current active transactions.	Aurora MySQL version 3, versions 3.08 and higher	Count
OldestReplicationSlotLag	The lagging size of the replica lagging the most in terms of write-ahead log (WAL) data received.	Aurora PostgreSQL	Bytes
PurgeBoundary	Transaction number up to which InnoDB purging is allowed. If this metric doesn't advance for extended periods of time, it's a good indication that InnoDB purging is blocked by long-running transactions. To investigate, check the active transactions on your Aurora MySQL DB cluster.	Aurora MySQL version 2, versions 2.11 and higher Aurora MySQL version 3, versions 3.08 and higher	Count
PurgeFinishedPoint	Transaction number up to which InnoDB purging is performed. This metric can help you examine how fast InnoDB purging is progressing.	Aurora MySQL version 2, versions 2.11 and higher Aurora MySQL version 3, versions 3.08 and higher	Count

Metric	Description	Applies to	Units
Queries	The average number of queries executed per second.	Aurora MySQL	Count per second
RDSToAuroraPostgreSQLReplicaLag	The lag when replicating updates from the primary RDS PostgreSQL instance to other nodes in the cluster.	Replica for Aurora PostgreSQL	Seconds
ReadIOPS	The average number of disk I/O operations per second but the reports read and write separately, in 1-minute intervals.	Aurora MySQL and Aurora PostgreSQL	Count per second
ReadIOPSEphemeralStorage	The average number of disk read I/O operations to Ephemeral NVMe storage.	Aurora PostgreSQL	Count per second
ReadLatency	The average amount of time taken per disk I/O operation.	Aurora MySQL and Aurora PostgreSQL	Seconds
ReadLatencyEphemeralStorage	The average amount of time taken per disk read I/O operation for Ephemeral NVMe storage.	Aurora PostgreSQL	Seconds
ReadThroughput	The average number of bytes read from disk per second.	Aurora MySQL and Aurora PostgreSQL	Bytes per second

Metric	Description	Applies to	Units
ReadThroughputEphemeralStorage	The average number of bytes read from disk per second for Ephemeral NVMe storage.	Aurora PostgreSQL	Bytes per second
ReplicationSlotDiskUsage	The amount of disk space consumed by replication slot files.	Aurora PostgreSQL	Bytes
ResultSetCacheHitRatio	The percentage of requests that are served by the Resultset cache.	Aurora MySQL version 2	Percentage
RollbackSegmentHistoryListLength	The undo logs that record committed transactions with delete-marked records. These records are scheduled to be processed by the InnoDB purge operation.	Aurora MySQL	Count
RowLockTime	The total time spent acquiring row locks for InnoDB tables.	Aurora MySQL	Milliseconds
SelectLatency	The average amount of time for select operations.	Aurora MySQL	Milliseconds
SelectThroughput	The average number of select queries per second.	Aurora MySQL	Count per second
ServerlessDatabaseCapacity	The current capacity of an Aurora Serverless DB cluster.	Aurora MySQL and Aurora PostgreSQL	Count

Metric	Description	Applies to	Units
StorageNetworkReceiveThroughput	The amount of network throughput received from the Aurora storage subsystem by each instance in the DB cluster.	Aurora MySQL and Aurora PostgreSQL	Bytes per second
StorageNetworkThroughput	The amount of network throughput received from and sent to the Aurora storage subsystem by each instance in the Aurora DB cluster.	Aurora MySQL and Aurora PostgreSQL	Bytes per second
StorageNetworkTransmitThroughput	The amount of network throughput sent to the Aurora storage subsystem by each instance in the Aurora DB cluster.	Aurora MySQL and Aurora PostgreSQL	Bytes per second
SumBinaryLogSize	The total size of the binlog files.	Aurora MySQL	Bytes
SwapUsage	The amount of swap space used. This metric isn't available for the following DB instance classes: • db.r3.*, db.r4.*, and db.r7g.* (Aurora MySQL) • db.r7g.* (Aurora PostgreSQL)	Aurora MySQL and Aurora PostgreSQL	Bytes

Metric	Description	Applies to	Units
TempStorageIOPS	The number of IOPS for both read and writes on local storage attached to the DB instance. This metric represents a count and is measured once per second. This metric is applicable only for Aurora serverless.	Aurora MySQL and Aurora PostgreSQL	Count per second
TempStorageThroughput	The amount of data transferred to and from local storage associated with the DB instance. This metric represents bytes and is measured once per second. This metric is applicable only for Aurora serverless.	Aurora MySQL and Aurora PostgreSQL	Bytes per second
TransactionAgeMaximum	The age of the oldest active running transaction.	Aurora MySQL version 3, versions 3.08 and higher	Seconds

Metric	Description	Applies to	Units
`TransactionLogsDiskUsage`	The amount of disk space consumed by transaction logs on the Aurora PostgreSQL DB instance. This metric is generated only when Aurora PostgreSQL is using logical replication or Amazon Database Migration Service. By default, Aurora PostgreSQL uses log records, not transaction logs. When transaction logs aren't in use, the value for this metric is `-1`.	Primary for Aurora PostgreSQL	Bytes
`TruncateFinishedPoint`	The transaction identifier up to which undo truncation is performed.	Aurora MySQL version 2, versions 2.11 and higher Aurora MySQL version 3, versions 3.08 and higher	Count
`UpdateLatency`	The average amount of time taken for update operations.	Aurora MySQL	Milliseconds
`UpdateThroughput`	The average number of updates per second.	Aurora MySQL	Count per second

Metric	Description	Applies to	Units
WriteIOPS	The number of Aurora storage write records generated per second. This is more or less the number of log records generated by the database. These do not correspond to 8K page writes, and do not correspon d to network packets sent.	Aurora MySQL and Aurora PostgreSQL	Count per second
WriteIOPSEphemeral Storage	The average number of disk write I/O operations to Ephemeral NVMe storage.	Aurora PostgreSQL	Count per second
WriteLatency	The average amount of time taken per disk I/O operation.	Aurora MySQL and Aurora PostgreSQL	Seconds
WriteLatencyEpheme ralStorage	The average amount of time taken per disk write I/O operation for Ephemeral NVMe storage.	Aurora PostgreSQL	Seconds
WriteThroughput	The average number of bytes written to persistent storage every second.	Aurora MySQL and Aurora PostgreSQL	Bytes per second
WriteThroughputEph emeralStorage	The average number of bytes written to disk per second for Ephemeral NVMe storage.	Aurora PostgreSQL	Bytes per second

Amazon CloudWatch usage metrics for Amazon Aurora

The `AWS/Usage` namespace in Amazon CloudWatch includes account-level usage metrics for your Amazon RDS service quotas. CloudWatch collects usage metrics automatically for all Amazon Web Services Regions.

For more information, see CloudWatch usage metrics in the *Amazon CloudWatch User Guide*. For more information about quotas, see Quotas and constraints for Amazon Aurora and Requesting a quota increase in the *Service Quotas User Guide*.

Metric	Description	Units*
`AuthorizationsPerDBSecurityGroup`	The number of ingress rules per DB security group in your Amazon Web Services account. The used value is the highest number of ingress rules in a DB security group in the account. Other DB security groups in the account might have a lower number of ingress rules.	Count
`CustomEndpointsPerDBCluster`	The number of custom endpoints per DB cluster in your Amazon Web Services account. The used value is the highest number of custom endpoints in a DB cluster in the account. Other DB clusters in the account might have a lower number of custom endpoints.	Count
`DBClusterParameterGroups`	The number of DB cluster parameter groups in your Amazon Web Services account. The count excludes default parameter groups.	Count
`DBClusterRoles`	The number of associated Amazon Identity and Access Management (IAM) roles per DB cluster in your Amazon Web Services account. The used value is the highest number of associated IAM roles for a DB cluster in the account. Other DB clusters in the account might have a lower number of associated IAM roles.	Count
`DBClusters`	The number of Amazon Aurora DB clusters in your Amazon Web Services account.	Count

Metric	Description	Units*
DBInstanceRoles	The number of associated Amazon Identity and Access Management (IAM) roles per DB instance in your Amazon Web Services account. The used value is the highest number of associated IAM roles for a DB instance in the account. Other DB instances in the account might have a lower number of associated IAM roles.	Count
DBInstances	The number of DB instances in your Amazon Web Services account.	Count
DBParameterGroups	The number of DB parameter groups in your Amazon Web Services account. The count excludes the default DB parameter groups.	Count
DBSubnetGroups	The number of DB subnet groups in your Amazon Web Services account. The count excludes the default subnet group.	Count
EventSubscriptions	The number of event notification subscriptions in your Amazon Web Services account.	Count
Integrations	The number of zero-ETL integrations with Amazon Redshift in your Amazon Web Services account.	Count
ManualClusterSnapshots	The number of manually created DB cluster snapshots in your Amazon Web Services account. The count excludes invalid snapshots.	Count
OptionGroups	The number of option groups in your Amazon Web Services account. The count excludes the default option groups.	Count
Proxies	The number of RDS proxies in your Amazon account.	Count

Metric	Description	Units*
ReadReplicasPerMaster	The number of read replicas per DB instance in your account. The used value is the highest number of read replicas for a DB instance in the account. Other DB instances in the account might have a lower number of read replicas.	Count
ReservedDBInstances	The number of reserved DB instances in your Amazon Web Services account. The count excludes retired or declined instances.	Count
SubnetsPerDBSubnetGroup	The number of subnets per DB subnet group in your Amazon Web Services account. The highest number of subnets for a DB subnet group in the account. Other DB subnet groups in the account might have a lower number of subnets.	Count

Note

Amazon RDS doesn't publish units for usage metrics to CloudWatch. The units only appear in the documentation.

Amazon CloudWatch dimensions for Aurora

You can filter Aurora metrics data by using any dimension in the following table.

Dimension	Filters the requested data for . . .
DBInstanceIdentifier	A specific DB instance.
DBClusterIdentifier	A specific Aurora DB cluster.
DBClusterIdentifier, Role	A specific Aurora DB cluster, aggregating the metric by instance role (WRITER/READER). For example, you can aggregate metrics for all READER instances that belong to a cluster.

Dimension	Filters the requested data for . . .
`DbClusterIdentifier, EngineName`	A specific Aurora DB cluster and engine name combination. For example, you can view the `VolumeReadIOPs` metric for cluster `ams1` and engine `aurora`.
`DatabaseClass`	All instances in a database class. For example, you can aggregate metrics for all instances that belong to the database class `db.r5.large` .
`EngineName`	The identified engine name only. For example, you can aggregate metrics for all instances that have the engine name `aurora-postgresql` .
`SourceRegion`	The specified Region only. For example, you can aggregate metrics for all DB instances in the `us-east-1` Region.

Availability of Aurora metrics in the Amazon RDS console

Not all metrics provided by Amazon Aurora are available in the Amazon RDS console. You can view these metrics using tools such as the Amazon CLI and CloudWatch API. Also, some metrics in the Amazon RDS console are either shown only for specific instance classes, or with different names and units of measurement.

Topics

- Aurora metrics available in the Last Hour view
- Aurora metrics available in specific cases
- Aurora metrics that aren't available in the console

Aurora metrics available in the Last Hour view

You can view a subset of categorized Aurora metrics in the default Last Hour view in the Amazon RDS console. The following table lists the categories and associated metrics displayed in the Amazon RDS console for an Aurora instance.

Category	Metrics
SQL	ActiveTransactions BlockedTransactions BufferCacheHitRatio CommitLatency CommitThroughput DatabaseConnections DDLLatency DDLThroughput Deadlocks DMLLatency DMLThroughput LoginFailures ResultSetCacheHitRatio SelectLatency SelectThroughput
System	AuroraReplicaLag AuroraReplicaLagMaximum AuroraReplicaLagMinimum CPUCreditBalance CPUCreditUsage CPUUtilization

Category	Metrics
	FreeableMemory FreeLocalStorage (This doesn't apply to Aurora serverless.) NetworkReceiveThroughput
Deployment	AuroraReplicaLag BufferCacheHitRatio ResultSetCacheHitRatio SelectThroughput

Aurora metrics available in specific cases

In addition, some Aurora metrics are either shown only for specific instance classes, or only for DB instances, or with different names and different units of measurement:

- The CPUCreditBalance and CPUCreditUsage metrics are displayed only for Aurora MySQL db.t2 instance classes and for Aurora PostgreSQL db.t3 instance classes.
- The following metrics that are displayed with different names, as listed:

Metric	Display name
AuroraReplicaLagMaximum	Replica lag maximum
AuroraReplicaLagMinimum	Replica lag minimum
DDLThroughput	DDL
NetworkReceiveThroughput	Network throughput
VolumeBytesUsed	[Billed] Volume bytes used
VolumeReadIOPs	[Billed] Volume read IOPS
VolumeWriteIOPs	[Billed] Volume write IOPS

- The following metrics apply to an entire Aurora DB cluster, but are displayed only when viewing DB instances for an Aurora DB cluster in the Amazon RDS console:
  - `VolumeBytesUsed`
  - `VolumeReadIOPs`
  - `VolumeWriteIOPs`
- The following metrics are displayed in megabytes, instead of bytes, in the Amazon RDS console:
  - `FreeableMemory`
  - `FreeLocalStorage`
  - `NetworkReceiveThroughput`
  - `NetworkTransmitThroughput`
- The following metrics apply to an Aurora PostgreSQL DB cluster with Aurora Optimized Reads:
  - `AuroraOptimizedReadsCacheHitRatio`
  - `FreeEphemeralStorage`
  - `ReadIOPSEphemeralStorage`
  - `ReadLatencyEphemeralStorage`
  - `ReadThroughputEphemeralStorage`
  - `WriteIOPSEphemeralStorage`
  - `WriteLatencyEphemeralStorage`
  - `WriteThroughputEphemeralStorage`

Aurora metrics that aren't available in the console

The following Aurora metrics aren't available in the Amazon RDS console:

- `AuroraBinlogReplicaLag`
- `DeleteLatency`
- `DeleteThroughput`
- `EngineUptime`
- `InsertLatency`
- `InsertThroughput`
- `NetworkThroughput`
- `Queries`

- `UpdateLatency`
- `UpdateThroughput`

Amazon CloudWatch metrics for Amazon RDS Performance Insights

Performance Insights automatically publishes some metrics to Amazon CloudWatch. The same data can be queried from Performance Insights, but having the metrics in CloudWatch makes it easy to add CloudWatch alarms. It also makes it easy to add the metrics to existing CloudWatch Dashboards.

Metric	Description
DBLoad	The number of active sessions for the database. Typically, you want the data for the average number of active sessions. In Performance Insights, this data is queried as `db.load.avg` .
DBLoadCPU	The number of active sessions where the wait event type is CPU. In Performance Insights, this data is queried as `db.load.avg` , filtered by the wait event type CPU.
DBLoadNonCPU	The number of active sessions where the wait event type is not CPU.
DBLoadRelativeToNumVCPUs	The ratio of the DB load to the number of virtual CPUs for the database.

Note

These metrics are published to CloudWatch only if there is load on the DB instance.

You can examine these metrics using the CloudWatch console, the Amazon CLI, or the CloudWatch API. You can also examine other detailed per-query and database counter metrics using a special

metric math function. For more information, see Querying other detailed database metrics in CloudWatch.

For example, you can get the statistics for the DBLoad metric by running the get-metric-statistics command.

```
aws cloudwatch get-metric-statistics \
    --region us-west-2 \
    --namespace AWS/RDS \
    --metric-name DBLoad  \
    --period 60 \
    --statistics Average \
    --start-time 1532035185 \
    --end-time 1532036185 \
    --dimensions Name=DBInstanceIdentifier,Value=db-loadtest-0
```

This example generates output similar to the following.

```
{
  "Datapoints": [
  {
  "Timestamp": "2021-07-19T21:30:00Z",
  "Unit": "None",
  "Average": 2.1
  },
  {
  "Timestamp": "2021-07-19T21:34:00Z",
  "Unit": "None",
  "Average": 1.7
  },
  {
  "Timestamp": "2021-07-19T21:35:00Z",
  "Unit": "None",
  "Average": 2.8
  },
  {
  "Timestamp": "2021-07-19T21:31:00Z",
  "Unit": "None",
  "Average": 1.5
  },
  {
  "Timestamp": "2021-07-19T21:32:00Z",
  "Unit": "None",
```

```
"Average": 1.8
},
{
"Timestamp": "2021-07-19T21:29:00Z",
"Unit": "None",
"Average": 3.0
},
{
"Timestamp": "2021-07-19T21:33:00Z",
"Unit": "None",
"Average": 2.4
}
],
"Label": "DBLoad"
}
```

For more information about CloudWatch, see What is Amazon CloudWatch? in the *Amazon CloudWatch User Guide*.

Querying other detailed database metrics in CloudWatch

> **Note**
>
> If you enable the Advanced mode of Database Insights, Amazon RDS publishes detailed per-query and database counter metrics to Amazon CloudWatch. With Database Insights, you don't need to use the `DB_PERF_INSIGHTS` metric math function. You can use the CloudWatch Database Insights dashboard to search, query, and set alarms for these metrics.

You can query, set alarms on, and graph detailed per-query and database counter metrics from CloudWatch. You can access information about your DB cluster by using the `DB_PERF_INSIGHTS` metric math function for CloudWatch. This function allows you to use the metrics that are not directly reported to CloudWatch to create a new time series.

You can use the new Metric Math function by clicking on the **Add Math** drop-down menu in the **Select metric** screen in the CloudWatch console. You can use it to create alarms and graphs on database counter metrics or on combinations of CloudWatch and these metrics, including high-resolution alarms for sub-minute metrics. You can also use the function programmatically by

including the Metric Math expression in a `get-metric-data` request. For more information, see Metric math syntax and functions and Create an alarm on Performance Insights counter metrics from an Amazon database.

Detailed Database Metrics

Counter metrics are operating system and database performance metrics. These metrics are exposed through the Performance Insights API. To help identify and analyze performance problems, you can correlate counter metrics with DB load. You must append a statistic function to the metric to get the metric values. For example, the supported functions for `os.memory.active` metric are `.avg`, `.min`, `.max`, `.sum`, and `.sample_count`.

The counter metrics are collected one time each minute. The OS metrics collection depends on whether Enhanced Monitoring is turned on or off. If Enhanced Monitoring is turned off, the OS metrics are collected one time each minute. If Enhanced Monitoring is turned on, the OS metrics are collected for the selected time period. For more information about turning Enhanced Monitoring on or off, see Turning Enhanced Monitoring on and off.

Topics

- Operating system counters
- Detailed Database Metrics for Aurora MySQL
- Detailed Database Metrics for Aurora PostgreSQL

Operating system counters

The following operating system counters, which are prefixed with `os`, are available through the Performance Insights API for Aurora PostgreSQL and Aurora MySQL.

You can use `ListAvailableResourceMetrics` API for the list of available counter metrics for your DB instance. For more information, see ListAvailableResourceMetrics in the Amazon RDS Performance Insights API Reference guide.

Counter	Type	Unit	Metric	Description
Active	Memory	Kilobytes	os.memory .active	The amount of assigned

Counter	Type	Unit	Metric	Description
				memory, in kilobytes.
Buffers	Memory	Kilobytes	os.memory.buffers	The amount of memory used for buffering I/O requests prior to writing to the storage device, in kilobytes.
Cached	Memory	Kilobytes	os.memory.cached	The amount of memory used for caching file system–based I/O, in kilobytes.
DB Cache	Memory	Bytes	os.memory.db.cache	The amount of memory used for page cache by database process in cluding tmpfs (shmem), in bytes.
DB Resident Set Size	Memory	Bytes	os.memory.db.residentSetSize	The amount of memory used for anonymous and swap cache by database process not including tmpfs (shmem), in bytes.

Counter	Type	Unit	Metric	Description
DB Swap	Memory	Bytes	os.memory .db.swap	The amount of memory used for swap by database process, in bytes.
Dirty	Memory	Kilobytes	os.memory.dirty	The amount of memory pages in RAM that have been modified but not written to their related data block in storage, in kilobytes.
Free	Memory	Kilobytes	os.memory.free	The amount of unassigne d memory, in kilobytes.
Huge Pages Free	Memory	Pages	os.memory .hugePagesFree	The number of free huge pages. Huge pages are a feature of the Linux kernel.
Huge Pages Rsvd	Memory	Pages	os.memory .hugePagesRsvd	The number of committed huge pages.
Huge Pages Size	Memory	Kilobytes	os.memory .hugePagesSize	The size for each huge pages unit, in kilobytes.

Counter	Type	Unit	Metric	Description
Huge Pages Surp	Memory	Pages	os.memory .hugePagesSurp	The number of available surplus huge pages over the total.
Huge Pages Total	Memory	Pages	os.memory .hugePagesTotal	The total number of huge pages.
Inactive	Memory	Kilobytes	os.memory .inactive	The amount of least-fre quently used memory pages, in kilobytes.
Mapped	Memory	Kilobytes	os.memory .mapped	The total amount of file-system contents that is memory mapped inside a process address space, in kilobytes.
Out of Memory Kill Count	Memory	Kills	os.memory .outOfMem oryKillCount	The number of OOM kills that happened over the last collectio n interval.
Page Tables	Memory	Kilobytes	os.memory .pageTables	The amount of memory used by page tables, in kilobytes.

Counter	Type	Unit	Metric	Description
Slab	Memory	Kilobytes	os.memory.slab	The amount of reusable kernel data structures, in kilobytes.
Total	Memory	Kilobytes	os.memory.total	The total amount of memory, in kilobytes.
Writeback	Memory	Kilobytes	os.memory.writeback	The amount of dirty pages in RAM that are still being written to the backing storage, in kilobytes.
Guest	Cpu Utilization	Percentage	os.cpuUtilization.guest	The percentage of CPU in use by guest programs.
Idle	Cpu Utilization	Percentage	os.cpuUtilization.idle	The percentage of CPU that is idle.
Irq	Cpu Utilization	Percentage	os.cpuUtilization.irq	The percentage of CPU in use by software interrupts.
Nice	Cpu Utilization	Percentage	os.cpuUtilization.nice	The percentage of CPU in use by programs running at lowest priority.

Counter	Type	Unit	Metric	Description
Steal	Cpu Utilization	Percentage	os.cpuUtilization.steal	The percentage of CPU in use by other virtual machines.
System	Cpu Utilization	Percentage	os.cpuUtilization.system	The percentage of CPU in use by the kernel.
Total	Cpu Utilization	Percentage	os.cpuUtilization.total	The total percentage of the CPU in use. This value includes the nice value.
User	Cpu Utilization	Percentage	os.cpuUtilization.user	The percentage of CPU in use by user programs.
Wait	Cpu Utilization	Percentage	os.cpuUtilization.wait	The percentage of CPU unused while waiting for I/O access.
Aurora Storage Aurora Storage Bytes Rx	Disk IO	Bytes per second	os.diskIO.auroraStorage.auroraStorageBytesRx	The number of bytes received from Aurora storage per second.
Aurora Storage Aurora Storage Bytes Tx	Disk IO	Bytes per second	os.diskIO.auroraStorage.auroraStorageBytesTx	The number of bytes uploaded to aurora storage per second.

Counter	Type	Unit	Metric	Description
Aurora Storage Disk Queue Depth	Disk IO	Requests	os.diskIO.auroraStorage.diskQueueDepth	The length of Aurora storage disk queue.
Aurora Storage Read IOs PS	Disk IO	Requests per second	os.diskIO.auroraStorage.readIOsPS	The number of read operations per second.
Aurora Storage Read Latency	Disk IO	Milliseconds	os.diskIO.auroraStorage.readLatency	The average latency of a read I/O request to Aurora storage, in milliseconds.
Aurora Storage Read Throughput	Disk IO	Bytes per second	os.diskIO.auroraStorage.readThroughput	The amount of network throughput used by requests to the DB cluster, in bytes per second.
Aurora Storage Write IOs PS	Disk IO	Requests per second	os.diskIO.auroraStorage.writeIOsPS	The number of write operations per second.
Aurora Storage Write Latency	Disk IO	Milliseconds	os.diskIO.auroraStorage.writeLatency	The average latency of a write I/O request to Aurora storage, in milliseconds.

Counter	Type	Unit	Metric	Description
Aurora Storage Write Throughput	Disk IO	Bytes per second	os.diskIO.auroraStorage.writeThroughput	The amount of network throughput used by responses from the DB cluster, in bytes per second.
Rdstemp Avg Queue Len	Disk IO	Requests	os.diskIO.rdstemp.avgQueueLen	The number of requests waiting in the I/O device's queue.
Rdstemp Avg Req Sz	Disk IO	Requests	os.diskIO.rdstemp.avgReqSz	The number of requests waiting in the I/O device's queue.
Rdstemp Await	Disk IO	Milliseconds	os.diskIO.rdstemp.await	The number of milliseconds required to respond to requests, including queue time and service time.
Rdstemp Read IOs PS	Disk IO	Requests	os.diskIO.rdstemp.readIOsPS	The number of read operations per second.
Rdstemp Read KB	Disk IO	Kilobytes	os.diskIO.rdstemp.readKb	The total number of kilobytes read.

Counter	Type	Unit	Metric	Description
Rdstemp Read KB PS	Disk IO	Kilobytes per second	os.diskIO .rdstemp. readKbPS	The number of kilobytes read per second.
Rdstemp Rrqm PS	Disk IO	Requests per second	os.diskIO .rdstemp.rrqmPS	The number of merged read requests queued per second.
Rdstemp TPS	Disk IO	Transactions per second	os.diskIO .rdstemp.tps	The number of I/O transactions per second.
Rdstemp Util	Disk IO	Percentage	os.diskIO .rdstemp.util	The percentag e of CPU time during which requests were issued.
Rdstemp Write IOs PS	Disk IO	Requests per second	os.diskIO .rdstemp. writeIOsPS	The number of write operations per second.
Rdstemp Write KB	Disk IO	Kilobytes	os.diskIO .rdstemp. writeKb	The total number of kilobytes written.
Rdstemp Write KB PS	Disk IO	Kilobytes per second	os.diskIO .rdstemp. writeKbPS	The number of kilobytes written per second.
Rdstemp Wrqm PS	Disk IO	Requests per second	os.diskIO .rdstemp. wrqmPS	The number of merged write requests queued per second.

Counter	Type	Unit	Metric	Description
Blocked	Tasks	Tasks	os.tasks.blocked	The number of tasks that are blocked.
Running	Tasks	Tasks	os.tasks.running	The number of tasks that are running.
Sleeping	Tasks	Tasks	os.tasks.sleeping	The number of tasks that are sleeping.
Stopped	Tasks	Tasks	os.tasks.stopped	The number of tasks that are stopped.
Total	Tasks	Tasks	os.tasks.total	The total number of tasks.
Zombie	Tasks	Tasks	os.tasks.zombie	The number of child tasks that are inactive with an active parent task.
One	Load Average Minute	Processes	os.loadAverageMinute.one	The number of processes requesting CPU time over the last minute.
Fifteen	Load Average Minute	Processes	os.loadAverageMinute.fifteen	The number of processes requesting CPU time over the last 15 minutes.

Counter	Type	Unit	Metric	Description
Five	Load Average Minute	Processes	os.loadAverageMinute.five	The number of processes requesting CPU time over the last 5 minutes.
Cached	Swap	Kilobytes	os.swap.cached	The amount of swap memory, in kilobytes, used as cache memory.
Free	Swap	Kilobytes	os.swap.free	The amount of swap memory free, in kilobytes.
In	Swap	Kilobytes	os.swap.in	The amount of memory, in kilobytes, swapped in from disk.
Out	Swap	Kilobytes	os.swap.out	The amount of memory, in kilobytes, swapped out to disk.
Total	Swap	Kilobytes	os.swap.total	The total amount of swap memory available in kilobytes.

Counter	Type	Unit	Metric	Description
Max Files	File Sys	Files	os.fileSys.maxFiles	The maximum number of files that can be created for the file system across all storage volumes.
Used Files	File Sys	Files	os.fileSys.usedFiles	The number of files in the file system across all storage volumes.
Used File Percent	File Sys	Files	os.fileSys.usedFilePercent	The percentage of available files in use across all storage volumes.
Used Percent	File Sys	Percentage	os.fileSys.usedPercent	The percentage of the file-system disk space in use across all storage volumes.
Used	File Sys	Kilobytes	os.fileSys.used	The amount of disk space used by files in the file system across all storage volumes, in kilobytes.

Counter	Type	Unit	Metric	Description
Total	File Sys	Kilobytes	os.fileSys.total	The total disk space available for the file system across all storage volumes, in kilobytes.
Max Files	File Sys	Files	os.fileSys.<volume Name>.maxFiles	The maximum number of files that can be created for the storage volume.
Used Files	File Sys	Files	os.fileSys.<volume Name>.usedFiles	The number of files in the storage volume.
Used File Percent	File Sys	Files	os.fileSys.<volume Name>.usedFilePercent	The percentage of available files in use in the storage volume.
Used Percent	File Sys	Percentage	os.fileSys.<volume Name>.usedPercent	The percentage of the storage volume disk space in use.
Used	File Sys	Kilobytes	os.fileSys.<volume Name>.used	The amount of disk space used by files in the storage volume, in kilobytes.

Counter	Type	Unit	Metric	Description
Total	File Sys	Kilobytes	os.fileSys.<volume Name>.total	The total disk space available in the storage volume, in kilobytes.
Rx	Network	Bytes per second	os.network.rx	The number of bytes received per second.
Tx	Network	Bytes per second	os.network.tx	The number of bytes uploaded per second.
Acu Utilization	General	Percentage	os.general.acuUtilization	The percentage of current capacity out of the maximum configured capacity.
Max Configured Acu	General	ACUs	os.general.maxConfiguredAcu	The maximum capacity configured by the user, in Aurora capacity units (ACUs).
Min Configured Acu	General	ACUs	os.general.minConfiguredAcu	The minimum capacity configured by the user, in ACUs.

Counter	Type	Unit	Metric	Description
Num VCPUs	General	vCPUs	os.general.numVCPUs	The number of virtual CPUs (vCPUs) for the DB instance.
Serverless Database Capacity	General	ACUs	os.general.serverlessDatabaseCapacity	The current capacity of the instance, in ACUs.

Detailed Database Metrics for Aurora MySQL

The following database counters are available through the Performance Insights API for Aurora MySQL.

Topics

- Native counters for Aurora MySQL
- Non-native counters for Aurora MySQL

Native counters for Aurora MySQL

Native metrics are defined by the database engine and not by Amazon Aurora. You can find definitions for these native metrics in Server status variables in the MySQL documentation.

Counter	Type	Unit	Metric
Com_analyze	SQL	Queries per second	db.SQL.Com_analyze
Com_optimize	SQL	Queries per second	db.SQL.Com_optimize

Counter	Type	Unit	Metric
Com_select	SQL	Queries per second	db.SQL.Com_select
Innodb_rows_deleted	SQL	Rows per second	db.SQL.Innodb_rows_deleted
Innodb_rows_inserted	SQL	Rows per second	db.SQL.Innodb_rows_inserted
Innodb_rows_read	SQL	Rows per second	db.SQL.Innodb_rows_read
Innodb_rows_updated	SQL	Rows per second	db.SQL.Innodb_rows_updated
Queries	SQL	Queries per second	db.SQL.Queries
Questions	SQL	Queries per second	db.SQL.Questions
Select_full_join	SQL	Queries per second	db.SQL.Select_full_join
Select_full_range_join	SQL	Queries per second	db.SQL.Select_full_range_join
Select_range	SQL	Queries per second	db.SQL.Select_range

Counter	Type	Unit	Metric
Select_range_check	SQL	Queries per second	db.SQL.Select_range_check
Select_scan	SQL	Queries per second	db.SQL.Select_scan
Slow_queries	SQL	Queries per second	db.SQL.Slow_queries
Sort_merge_passes	SQL	Queries per second	db.SQL.Sort_merge_passes
Sort_range	SQL	Queries per second	db.SQL.Sort_range
Sort_rows	SQL	Queries per second	db.SQL.Sort_rows
Sort_scan	SQL	Queries per second	db.SQL.Sort_scan
Total_query_time	SQL	Milliseconds	db.SQL.Total_query_time
Table_locks_immediate	Locks	Requests per second	db.Locks.Table_locks_immediate

Counter	Type	Unit	Metric
Table_locks_waited	Locks	Requests per second	db.Locks.Table_locks_waited
Innodb_row_lock_time	Locks	Milliseconds (average)	db.Locks.Innodb_row_lock_time
Aborted_clients	Users	Connections	db.Users.Aborted_clients
Aborted_connects	Users	Connections	db.Users.Aborted_connects
Connections	Users	Connections	db.Users.Connections
External_threads_connected	Users	Connections	db.Users.External_threads_connected
max_connections	Users	Connections	db.Users.max_connections
Threads_connected	Users	Connections	db.Users.Threads_connected
Threads_created	Users	Connections	db.Users.Threads_created
Threads_running	Users	Connections	db.Users.Threads_running
Created_tmp_disk_tables	Temp	Tables per second	db.Temp.Created_tmp_disk_tables
Created_tmp_tables	Temp	Tables per second	db.Temp.Created_tmp_tables

Counter	Type	Unit	Metric
Innodb_buffer_pool_pages_data	Cache	Pages	db.Cache.Innodb_buffer_pool_pages_data
Innodb_buffer_pool_pages_total	Cache	Pages	db.Cache.Innodb_buffer_pool_pages_total
Innodb_buffer_pool_read_requests	Cache	Pages per second	db.Cache.Innodb_buffer_pool_read_requests
Innodb_buffer_pool_reads	Cache	Pages per second	db.Cache.Innodb_buffer_pool_reads
Opened_tables	Cache	Tables	db.Cache.Opened_tables
Opened_table_definitions	Cache	Tables	db.Cache.Opened_table_definitions
Qcache_hits	Cache	Queries	db.Cache.Qcache_hits

Non-native counters for Aurora MySQL

Non-native counter metrics are counters defined by Amazon RDS. A non-native metric can be a metric that you get with a specific query. A non-native metric also can be a derived metric, where two or more native counters are used in calculations for ratios, hit rates, or latencies.

Counter	Type	Unit	Metric	Description	Definition
active_transactions	Transac ons	db.Tran ctions.a tive_tra saction	The total active transacti ons.	`SELECT COUNT(1) AS active_transactions FROM INFORMATION_SCHEMA.INNODB_TRX`	
innodb_buffer_pool_hit_rate	Cache	db.Cach innoDB	The percentag	`100 * innodb_buffer_pool`	

Counter	Type	Unit	Metric	Description	Definition
		ffer_po _hit_ra	e of reads that InnoDB could satisfy from the buffer pool.	`_read_req uests / (innodb_ buffer_po ol_read_r equests + innodb_bu ffer_pool _reads)`	
innodb_bu ffer_pool_hits	Cache	Pages per second	db.Cache. innoDB_bu ffer_pool _hits	The number of reads that InnoDB could satisfy from the buffer pool.	`innodb_bu ffer_pool _read_requests - innodb_bu ffer_pool _reads`

Counter	Type	Unit	Metric	Description	Definition
innodb_buffer_pool_usage	Cache	Percent	db.Cache.innoDB_buffer_pool_usage	The percentage of the InnoDB buffer pool that contains data (pages). **Note** When using compressed tables, this value can vary. For more information, see the information about `Innodb_buffer_pool_pages_data` and `Innodb_buffer_pool_pages_total` in Server status sariables in the MySQL documentation.	`Innodb_buffer_pool_pages_data / Innodb_buffer_pool_pages_total * 100.0`

Counter	Type	Unit	Metric	Description	Definition
innodb_deadlocks	Locks	db.Locl innodb adlocks	The total number of deadlocks.	SELECT COUNT AS innodb_de adlocks FROM INFORMATION_SC HEMA.INNO DB_METRICS WHERE NAME= 'lock_dea dlocks'	
innodb_lo ck_timeouts	Locks	db.Locl innodb ck_time ts	The total number of deadlocks that timed out.	SELECT COUNT AS innodb_lo ck_timeouts FROM INFOR MATION_SC HEMA.INNO DB_METRICS WHERE NAME= 'lock_tim eouts'	
innodb_ro w_lock_waits	Locks	db.Locl innodb w_lock its	The total number of row locks that resulted in a wait.	SELECT COUNT AS innodb_ro w_lock_waits FROM INFOR MATION_SC HEMA.INNO DB_METRICS WHERE NAME ='lock_ro w_lock_waits'	

Counter	Type	Unit	Metric	Description	Definition
innodb_rows_changed	SQL	db.SQL nodb_r _chang	The total InnoDB row operations.	db.SQL.Innodb_rows_inserted + db.SQL.Innodb_rows_deleted + db.SQL.Innodb_rows_updated	
query_cache_hit_rate	Cache	Percent e	db.Cache.query_cache_hit_rate	The hit ratio for the MySQL result set cache (query cache).	Qcache_hits / (QCache_hits + Com_select) * 100
temp_disk_tables_percent	Temp	db.Temp_di tables_ rcent	The percentage of temporary tables that are created on disk by the server when running statements.	(db.Temp.Created_tmp_disk_tables / db.Temp.Created_tmp_tables) * 100	

Counter	Type	Unit	Metric	Description	Definition
trx_rseg_history_len	Transactions	None	db.Transactions.trx_rseg_history_len	A list of the undo log pages for committed transactions that is maintained by the InnoDB transaction system to implement multi-version concurrency control. For more information about undo log records details, see https://dev.mysql.com/doc/refman/8.0/en/innodb-multi-versioning.html in the MySQL documentation.	`SELECT COUNT AS trx_rseg_history_len FROM INFORMATION_SCHEMA.INNODB_METRICS WHERE NAME='trx_rseg_history_len'`

Detailed Database Metrics for Aurora PostgreSQL

The following database counters are available through the Performance Insights API for Aurora PostgreSQL.

Topics

- Native counters for Aurora PostgreSQL
- Non-native counters for Aurora PostgreSQL

Native counters for Aurora PostgreSQL

Native metrics are defined by the database engine and not by Amazon Aurora. You can find definitions for these native metrics in Viewing Statistics in the PostgreSQL documentation.

Counter	Type	Unit	Metric
tup_deleted	SQL	Tuples per second	db.SQL.tup_deleted
tup_fetched	SQL	Tuples per second	db.SQL.tup_fetched
tup_inserted	SQL	Tuples per second	db.SQL.tup_inserted
tup_returned	SQL	Tuples per second	db.SQL.tup_returned
tup_updated	SQL	Tuples per second	db.SQL.tup_updated
blks_hit	Cache	Blocks per second	db.Cache.blks_hit
buffers_alloc	Cache	Blocks per second	db.Cache.buffers_alloc
buffers_checkpoint	Checkpoint	Blocks per second	db.Checkpoint.buffers_checkpoint
checkpoints_req	Checkpoint	Checkpoints per minute	db.Checkpoint.checkpoints_req
checkpoint_sync_time	Checkpoint	Milliseconds per checkpoint	db.Checkpoint.checkpoint_sync_time
checkpoints_timed	Checkpoint	Checkpoints per minute	db.Checkpoint.checkpoints_timed
checkpoint_write_time	Checkpoint	Milliseconds per checkpoint	db.Checkpoint.checkpoint_write_time
maxwritten_clean	Checkpoint	Bgwriter clean stops per minute	db.Checkpoint.maxwritten_clean
deadlocks	Concurrency	Deadlocks per minute	db.Concurrency.deadlocks
blk_read_time	I/O	Milliseconds	db.IO.blk_read_time

Counter	Type	Unit	Metric
blks_read	I/O	Blocks per second	db.IO.blks_read
buffers_backend	I/O	Blocks per second	db.IO.buffers_backend
buffers_backend_fsync	I/O	Blocks per second	db.IO.buffers_backend_fsync
buffers_clean	I/O	Blocks per second	db.IO.buffers_clean
temp_bytes	Temp	Bytes per second	db.Temp.temp_bytes
temp_files	Temp	Files per minute	db.Temp.temp_files
xact_commit	Transactions	Commits per second	db.Transactions.xact_commit
xact_rollback	Transactions	Rollbacks per second	db.Transactions.xact_rollback
numbackends	User	Connections	db.User.numbackends
archived_count	WAL	Files per minute	db.WAL.archived_count

Non-native counters for Aurora PostgreSQL

Non-native counter metrics are counters defined by Amazon Aurora. A non-native metric can be a metric that you get with a specific query. A non-native metric also can be a derived metric, where two or more native counters are used in calculations for ratios, hit rates, or latencies.

Counter	Type	Unit	Metric	Description	Definition
checkpoint_sync_latency	Checkpoint	Milliseconds	db.Checkpoint.checkpoint_sy	The total amount of time that has been spent in the portion of checkpoin	`checkpoint_sync_time / (checkpoints_timed`

Counter	Type	Unit	Metric	Description	Definition
			nc_latency	t processing where files are synchronized to disk.	`+ checkpoints_req)`
checkpoint_write_latency	Checkpoint	Milliseconds	db.Checkpoint.checkpoint_write_latency	The total amount of time that has been spent in the portion of checkpoint processing where files are written to disk.	`checkpoint_write_time / (checkpoints_timed + checkpoints_req)`
local_blks_read	I/O	Blocks	db.IO.local_blks_read	Total number of local blocks read.	Not applicable
local_blk_read_time	I/O	Milliseconds	db.IO.local_blk_read_time	If `track_io_timing` is enabled, it tracks the total time spent reading local data file blocks, in milliseconds, otherwise the value is zero. For more information, see track_io_timing.	Not applicable
num_blocked_sessions	Locks	db.Locks.num_blocked_sessions	The number of blocked sessions.	–	

Counter	Type	Unit	Metric	Description	Definition
orcache_blks_hit	I/O	Queries	db.IO.orcache_blks_hit	Total number of shared blocks hits from optimized reads cache.	Not applicable
orcache_blk_read_time	I/O	Milliseconds	db.IO.orcache_blk_read_time	If `track_io_timing` is enabled, it tracks the total time spent reading data file blocks from Optimized Reads cache, in milliseconds, otherwise the value is zero. For more information, see track_io_timing.	Not applicable
read_latency	I/O	Milliseconds	db.IO.read_latency	The time spent reading data file blocks by backends in this instance.	`blk_read_time / blks_read`
storage_blks_read	I/O	Blocks	db.IO.storage_blks_read	Total number of shared blocks read from aurora storage.	Not applicable

Counter	Type	Unit	Metric	Description	Definition
storage_blk_read_time	I/O	Milliseconds	db.IO.storage_blk_read_time	If `track_io_timing` is enabled, it tracks the total time spent reading data file blocks from Aurora storage, in milliseconds, otherwise the value is zero. For more information, see track_io_timing.	Not applicable
active_count	State	Sessions	db.state.active_count	The number of sessions in the `active` state.	Not applicable
idle_count	State	Sessions	db.state.idle_count	The number of sessions in the `idle` state.	Not applicable
idle_in_transaction_aborted_count	State	Sessions	db.state.idle_in_transaction_aborted_count	The number of sessions in the `idle in transaction (aborted)` state.	Not applicable
idle_in_transaction_count	State	Sessions	db.state.idle_in_transaction_count	The number of sessions in the `idle in transaction` state.	Not applicable

Counter	Type	Unit	Metric	Description	Definition
idle_in_transaction_max_time	State	Seconds	db.state.idle_in_transaction_max_time	The duration of the longest running transaction in the `idle in transaction` state, in seconds.	Not applicable
logical_reads	SQL	Blocks	db.SQL.logical_reads	The total number of blocks hit and read.	`blks_hit + blks_read`
queries_started	SQL	Queries	db.SQL.queries	The number of queries started.	Not applicable
queries_finished	SQL	Queries	db.SQL.queries	The number of queries finished.	Not applicable
total_query_time	SQL	Milliseconds	db.SQL.total_query_time	The total time spent executing statements, in milliseconds.	Not applicable
active_transactions	Transactions	Transactions	db.Transactions.active_transactions	The number of active transactions.	Not applicable
blocked_transactions	Transactions	Transactions	db.Transactions.blocked_transactions	The number of blocked transactions.	Not applicable

Counter	Type	Unit	Metric	Description	Definition
commit_latency	Transactions	Microseconds	db.Transactions.commit_latency	The average duration of commit operations.	`db.Transactions.duration_commits / db.Transactions.xact_commit`
duration_commits	Transactions	Milliseconds	db.Transactions.duration_commits	The total transaction time spent in the last minute, in milliseconds.	Not applicable
max_used_xact_ids	Transactions	Transactions	db.Transactions.max_used_xact_ids	The number of transactions that haven't been vacuumed.	Not applicable
oldest_inactive_logical_replication_slot_xid_age	Transactions	Length	db.Transactions.oldest_inactive_logical_replication_slot_xid_age	The age of the oldest transaction in an inactive logical replication slot.	Not applicable
oldest_active_logical_replication_slot_xid_age	Transactions	Length	db.Transactions.oldest_active_logical_replication_slot_xid_age	The age of the oldest transaction in an active logical replication slot.	Not applicable

Counter	Type	Unit	Metric	Description	Definition
oldest_reader_feedback_xid_age	Transactions	Length	db.Transactions.oldest_reader_feedback_xid_age	The age of the oldest transaction of a long-running transaction on an Aurora reader instance or Aurora global DB reader instance.	Not applicable
oldest_prepared_transaction_xid_age	Transactions	Length	db.Transactions.oldest_prepared_transaction_xid_age	The age of the oldest prepared transaction.	Not applicable
oldest_running_transaction_xid_age	Transactions	Length	db.Transactions.oldest_running_transaction_xid_age	The age of the oldest running transaction.	Not applicable
max_connections	Users	Users	db.User.max_connections	The maximum number of connections allowed for a database as configured in `max_connections` parameter.	Not applicable
total_auth_attempts	Users	Users	db.User.total_auth_attempts	The number of connection attempts to this instance.	Not applicable

Counter	Type	Unit	Metric	Description	Definition
archive_failed_count	WAL	Files per minute	db.WAL.archive_failed_count	The number of failed attempts for archiving WAL files, in files per minute.	Not applicable

SQL statistics for Performance Insights

SQL statistics are performance-related metrics about SQL queries. These detailed per-query metrics are exposed through the Performance Insights API, which gathers statistics for each second that a query is running and for each SQL call. The SQL statistics are an average for the selected time range.

A SQL digest is a composite of all queries having a given pattern but not necessarily having the same literal values. The digest replaces literal values with a question mark. For example, `SELECT * FROM emp WHERE lname= ?`. This digest might consist of the following child queries:

```
SELECT * FROM emp WHERE lname = 'Sanchez'
SELECT * FROM emp WHERE lname = 'Olagappan'
SELECT * FROM emp WHERE lname = 'Wu'
```

All engines support SQL statistics for digest queries.

For the region, DB engine, and instance class support information for this feature, see Database Insights.

Topics

- SQL statistics for Aurora MySQL
- SQL statistics for Aurora PostgreSQL

SQL statistics for Aurora MySQL

Aurora MySQL collect SQL statistics only at the digest level. No statistics are shown at the statement level.

Topics

- Digest statistics for Aurora MySQL
- Per-second statistics for Aurora MySQL
- Per-call statistics for Aurora MySQL
- Primary statistics for Aurora MySQL

Digest statistics for Aurora MySQL

Performance Insights collects SQL digest statistics from the `events_statements_summary_by_digest` table. The `events_statements_summary_by_digest` table is managed by your database.

The digest table doesn't have an eviction policy. When the table is full, the Amazon Web Services Management Console shows the following message:

```
Performance Insights is unable to collect SQL Digest statistics on new queries because
 the table events_statements_summary_by_digest is full.
Please truncate events_statements_summary_by_digest table to clear the issue. Check the
 User Guide for more details.
```

In this situation, Aurora MySQL doesn't track SQL queries. To address this issue, Performance Insights automatically truncates the digest table when both of the following conditions are met:

- The table is full.
- Performance Insights manages the Performance Schema automatically.

  For automatic management, the `performance_schema` parameter must be set to `0` and the **Source** must not be set to `user`. If Performance Insights isn't managing the Performance Schema automatically, see Overview of the Performance Schema for Database Insights in Aurora MySQL.

In the Amazon CLI, check the source of a parameter value by running the describe-db-parameters command.

Per-second statistics for Aurora MySQL

The following SQL statistics are available for Aurora MySQL DB clusters.

Metric	Unit
db.sql_tokenized.stats.count_star_per_sec	Calls per second
db.sql_tokenized.stats.sum_timer_wait_per_sec	Average latency per second (in ms)
db.sql_tokenized.stats.sum_select_full_join_per_sec	Select full join per second
db.sql_tokenized.stats.sum_select_range_check_per_sec	Select range check per second
db.sql_tokenized.stats.sum_select_scan_per_sec	Select scan per second
db.sql_tokenized.stats.sum_sort_merge_passes_per_sec	Sort merge passes per second
db.sql_tokenized.stats.sum_sort_scan_per_sec	Sort scans per second
db.sql_tokenized.stats.sum_sort_range_per_sec	Sort ranges per second
db.sql_tokenized.stats.sum_sort_rows_per_sec	Sort rows per second
db.sql_tokenized.stats.sum_rows_affected_per_sec	Rows affected per second
db.sql_tokenized.stats.sum_rows_examined_per_sec	Rows examined per second
db.sql_tokenized.stats.sum_rows_sent_per_sec	Rows sent per second
db.sql_tokenized.stats.sum_created_tmp_disk_tables_per_sec	Created temporary disk tables per second
db.sql_tokenized.stats.sum_created_tmp_tables_per_sec	Created temporary tables per second

Metric	Unit
db.sql_tokenized.stats.sum_lock_time_per_sec	Lock time per second (in ms)

Per-call statistics for Aurora MySQL

The following metrics provide per call statistics for a SQL statement.

Metric	Unit
db.sql_tokenized.stats.sum_timer_wait_per_call	Average latency per call (in ms)
db.sql_tokenized.stats.sum_select_full_join_per_call	Select full joins per call
db.sql_tokenized.stats.sum_select_range_check_per_call	Select range check per call
db.sql_tokenized.stats.sum_select_scan_per_call	Select scans per call
db.sql_tokenized.stats.sum_sort_merge_passes_per_call	Sort merge passes per call
db.sql_tokenized.stats.sum_sort_scan_per_call	Sort scans per call
db.sql_tokenized.stats.sum_sort_range_per_call	Sort ranges per call
db.sql_tokenized.stats.sum_sort_rows_per_call	Sort rows per call
db.sql_tokenized.stats.sum_rows_affected_per_call	Rows affected per call
db.sql_tokenized.stats.sum_rows_examined_per_call	Rows examined per call

Metric	Unit
db.sql_tokenized.stats.sum_rows_sent_per_call	Rows sent per call
db.sql_tokenized.stats.sum_created_tmp_disk_tables_per_call	Created temporary disk tables per call
db.sql_tokenized.stats.sum_created_tmp_tables_per_call	Created temporary tables per call
db.sql_tokenized.stats.sum_lock_time_per_call	Lock time per call (in ms)

Primary statistics for Aurora MySQL

The following SQL statistics are available for Aurora MySQL DB clusters.

Metric	Unit
db.sql_tokenized.stats.count_star	Calls
db.sql_tokenized.stats.sum_timer_wait	Wait time (in ms)
db.sql_tokenized.stats.sum_select_full_join	Select full join
db.sql_tokenized.stats.sum_select_range_check	Select range checks
db.sql_tokenized.stats.sum_select_scan	Select scans
db.sql_tokenized.stats.sum_sort_merge_passes	Sort merge passes
db.sql_tokenized.stats.sum_sort_scan	Sort scans
db.sql_tokenized.stats.sum_sort_range	Sort ranges
db.sql_tokenized.stats.sum_sort_rows	Sort rows
db.sql_tokenized.stats.sum_rows_affected	Rows affected

Metric	Unit
db.sql_tokenized.stats.sum_rows_examined	Rows examined
db.sql_tokenized.stats.sum_rows_sent	Rows sent
db.sql_tokenized.stats.sum_created_tmp_disk_tables	Created temporary disk tables
db.sql_tokenized.stats.sum_created_tmp_tables	Created temporary tables
db.sql_tokenized.stats.sum_lock_time	Lock time (in ms)

SQL statistics for Aurora PostgreSQL

For each SQL call and for each second that a query runs, Performance Insights collects SQL statistics. All Aurora engines collect statistics only at the digest-level.

Following, you can find information about digest-level statistics for Aurora PostgreSQL.

Topics

- Digest statistics for Aurora PostgreSQL
- Per-second digest statistics for Aurora PostgreSQL
- Per-call digest statistics for Aurora PostgreSQL
- Primary statistics for Aurora PostgreSQL

Digest statistics for Aurora PostgreSQL

To view SQL digest statistics, the `pg_stat_statements` library must be loaded. For Aurora PostgreSQL DB clusters that are compatible with PostgreSQL 10, this library is loaded by default. For Aurora PostgreSQL DB clusters that are compatible with PostgreSQL 9.6, you enable this library manually. To enable it manually, add `pg_stat_statements` to `shared_preload_libraries` in the DB parameter group associated with the DB instance. Then reboot your DB instance. For more information, see Parameter groups for Amazon Aurora.

Note

Performance Insights can only collect statistics for queries in `pg_stat_activity` that aren't truncated. By default, PostgreSQL databases truncate queries longer than 4,096 bytes. To increase the query size, change the `track_activity_query_size` parameter in the DB parameter group associated with your DB instance. When you change this parameter, a DB instance reboot is required.

Per-second digest statistics for Aurora PostgreSQL

The following SQL digest statistics are available for Aurora PostgreSQL DB instances.

Metric	Unit
db.sql_tokenized.stats.calls_per_sec	Calls per second
db.sql_tokenized.stats.rows_per_sec	Rows per second
db.sql_tokenized.stats.total_time_per_sec	Average active executions per second (AAE)
db.sql_tokenized.stats.shared_blks_hit_per_sec	Block hits per second
db.sql_tokenized.stats.shared_blks_read_per_sec	Block reads per second
db.sql_tokenized.stats.shared_blks_dirtied_per_sec	Blocks dirtied per second
db.sql_tokenized.stats.shared_blks_written_per_sec	Block writes per second
db.sql_tokenized.stats.local_blks_hit_per_sec	Local block hits per second
db.sql_tokenized.stats.local_blks_read_per_sec	Local block reads per second
db.sql_tokenized.stats.local_blks_dirtied_per_sec	Local block dirtied per second

Metric	Unit
db.sql_tokenized.stats.local_blks_written_per_sec	Local block writes per second
db.sql_tokenized.stats.temp_blks_written_per_sec	Temporary writes per second
db.sql_tokenized.stats.temp_blks_read_per_sec	Temporary reads per second
db.sql_tokenized.stats.blk_read_time_per_sec	Average concurrent reads per second
db.sql_tokenized.stats.blk_write_time_per_sec	Average concurrent writes per second

Per-call digest statistics for Aurora PostgreSQL

The following metrics provide per call statistics for a SQL statement.

Metric	Unit
db.sql_tokenized.stats.rows_per_call	Rows per call
db.sql_tokenized.stats.avg_latency_per_call	Average latency per call (in ms)
db.sql_tokenized.stats.shared_blks_hit_per_call	Block hits per call
db.sql_tokenized.stats.shared_blks_read_per_call	Block reads per call
db.sql_tokenized.stats.shared_blks_written_per_call	Block writes per call
db.sql_tokenized.stats.shared_blks_dirtied_per_call	Blocks dirtied per call
db.sql_tokenized.stats.local_blks_hit_per_call	Local block hits per call

Metric	Unit
db.sql_tokenized.stats.local_blks_read_per_call	Local block reads per call
db.sql_tokenized.stats.local_blks_dirtied_per_call	Local block dirtied per call
db.sql_tokenized.stats.local_blks_written_per_call	Local block writes per call
db.sql_tokenized.stats.temp_blks_written_per_call	Temporary block writes per call
db.sql_tokenized.stats.temp_blks_read_per_call	Temporary block reads per call
db.sql_tokenized.stats.blk_read_time_per_call	Read time per call (in ms)
db.sql_tokenized.stats.blk_write_time_per_call	Write time per call (in ms)

Primary statistics for Aurora PostgreSQL

The following SQL statistics are available for Aurora PostgreSQL DB instances.

Metric	Unit
db.sql_tokenized.stats.calls	Calls
db.sql_tokenized.stats.rows	Rows
db.sql_tokenized.stats.total_time	Total time (in ms)
db.sql_tokenized.stats.shared_blks_hit	Block hits
db.sql_tokenized.stats.shared_blks_read	Block reads
db.sql_tokenized.stats.shared_blks_dirtied	Blocks dirtied
db.sql_tokenized.stats.shared_blks_written	Block writes

Metric	Unit
db.sql_tokenized.stats.local_blks_hit	Local block hits
db.sql_tokenized.stats.local_blks_read	Local block reads
db.sql_tokenized.stats.local_blks_dirtied	Local blocks dirtied
db.sql_tokenized.stats.local_blks_written	Local block writes
db.sql_tokenized.stats.temp_blks_written	Temporary writes
db.sql_tokenized.stats.temp_blks_read	Temporary reads
db.sql_tokenized.stats.blk_read_time	Average concurrent reads (in ms)
db.sql_tokenized.stats.blk_write_time	Average concurrent writes (in ms)

For more information about these metrics, see pg_stat_statements in the PostgreSQL documentation.

OS metrics in Enhanced Monitoring

Amazon Aurora provides metrics in real time for the operating system (OS) that your DB cluster runs on. Aurora delivers the metrics from Enhanced Monitoring to your Amazon CloudWatch Logs account. The following tables list the OS metrics available using Amazon CloudWatch Logs.

Topics

- OS metrics for Aurora

OS metrics for Aurora

Group	Metric	Console name	Description
General	engine	Not applicable	The database engine for the DB instance.

Group	Metric	Console name	Description
	instanceID	Not applicable	The DB instance identifier.
	instanceResourceID	Not applicable	An immutable identifier for the DB instance that is unique to an Amazon Region, also used as the log stream identifier.
	numVCPUs	Not applicable	The number of virtual CPUs for the DB instance.
	timestamp	Not applicable	The time at which the metrics were taken.
	uptime	Not applicable	The amount of time that the DB instance has been active.
	version	Not applicable	The version of the OS metrics' stream JSON format.
cpuUtilization	guest	**CPU Guest**	The percentage of CPU in use by guest programs.
	idle	**CPU Idle**	The percentage of CPU that is idle.
	irq	**CPU IRQ**	The percentage of CPU in use by software interrupts.
	nice	**CPU Nice**	The percentage of CPU in use by programs running at lowest priority.
	steal	**CPU Steal**	The percentage of CPU in use by other virtual machines.
	system	**CPU System**	The percentage of CPU in use by the kernel.
	total	**CPU Total**	The total percentage of the CPU in use. This value includes the nice value.

Group	Metric	Console name	Description
	user	**CPU User**	The percentage of CPU in use by user programs.
	wait	**CPU Wait**	The percentage of CPU unused while waiting for I/O access.
diskIO	avgQueueLen	**Avg Queue Size**	The number of requests waiting in the I/O device's queue.
	avgReqSz	**Ave Request Size**	The average request size, in kilobytes.
	await	**Disk I/O Await**	The number of milliseconds required to respond to requests, including queue time and service time.
	device	Not applicable	The identifier of the disk device in use.
	readIOsPS	**Read IO/s**	The number of read operations per second.
	readKb	**Read Total**	The total number of kilobytes read.
	readKbPS	**Read Kb/s**	The number of kilobytes read per second.
	readLatency	**Read Latency**	The elapsed time between the submission of a read I/O request and its completion, in milliseconds. This metric is only available for Amazon Aurora.
	readThroughput	**Read Throughput**	The amount of network throughput used by requests to the DB cluster, in bytes per second. This metric is only available for Amazon Aurora.
	rrqmPS	**Rrqms**	The number of merged read requests queued per second.

Group	Metric	Console name	Description
	tps	**TPS**	The number of I/O transactions per second.
	util	**Disk I/O Util**	The percentage of CPU time during which requests were issued.
	writeIOsPS	**Write IO/s**	The number of write operations per second.
	writeKb	**Write Total**	The total number of kilobytes written.
	writeKbPS	**Write Kb/s**	The number of kilobytes written per second.
	writeLatency	**Write Latency**	The average elapsed time between the submission of a write I/O request and its completion, in milliseconds. This metric is only available for Amazon Aurora.
	writeThroughput	**Write Throughput**	The amount of network throughput used by responses from the DB cluster, in bytes per second. This metric is only available for Amazon Aurora.
	wrqmPS	**Wrqms**	The number of merged write requests queued per second.
mountPoint	Not applicable	The path to the file system.	
fileSys	maxFiles	**Max Inodes**	The maximum number of files that can be created for the file system.

Group	Metric	Console name	Description
	`mountPoint`	Not applicable	The path to the file system. When this is `/rdsdbdata*` , it represents the aggregate of all storage volumes.
	`name`	Not applicable	The name of the file system.
	`total`	**Total Filesystem**	The total number of disk space available for the file system, in kilobytes.
	`used`	**Used Filesystem**	The amount of disk space used by files in the file system, in kilobytes.
	`usedFilePercent`	**Used Inodes**	The percentage of available files in use.
	`usedFiles`	**Used%**	The number of files in the file system.
	`usedPercent`	**Used Filesystem**	The percentage of the file-system disk space in use.
`loadAverageMinute`	`fifteen`	**Load Avg 15 min**	The number of processes requesting CPU time over the last 15 minutes.
	`five`	**Load Avg 5 min**	The number of processes requesting CPU time over the last 5 minutes.
	`one`	**Load Avg 1 min**	The number of processes requesting CPU time over the last minute.
`memory`	`active`	**Active Memory**	The amount of assigned memory, in kilobytes.

Group	Metric	Console name	Description
	buffers	**Buffered Memory**	The amount of memory used for buffering I/O requests prior to writing to the storage device, in kilobytes.
	cached	**Cached Memory**	The amount of memory used for caching file system–based I/O.
	dirty	**Dirty Memory**	The amount of memory pages in RAM that have been modified but not written to their related data block in storage, in kilobytes.
	free	**Free Memory**	The amount of unassigned memory, in kilobytes.
	hugePagesFree	**Huge Pages Free**	The number of free huge pages. Huge pages are a feature of the Linux kernel.
	hugePagesRsvd	**Huge Pages Rsvd**	The number of committed huge pages.
	hugePagesSize	**Huge Pages Size**	The size for each huge pages unit, in kilobytes.
	hugePagesSurp	**Huge Pages Surp**	The number of available surplus huge pages over the total.
	hugePagesTotal	**Huge Pages Total**	The total number of huge pages.
	inactive	**Inactive Memory**	The amount of least-frequently used memory pages, in kilobytes.

Group	Metric	Console name	Description
	mapped	**Mapped Memory**	The total amount of file-system contents that is memory mapped inside a process address space, in kilobytes.
	pageTables	**Page Tables**	The amount of memory used by page tables, in kilobytes.
	slab	**Slab Memory**	The amount of reusable kernel data structures, in kilobytes.
	total	**Total Memory**	The total amount of memory, in kilobytes.
	writeback	**Writeback Memory**	The amount of dirty pages in RAM that are still being written to the backing storage, in kilobytes.
network	interface	Not applicable	The identifier for the network interface being used for the DB instance.
	rx	**RX**	The number of bytes received per second.
	tx	**TX**	The number of bytes uploaded per second.
processList	cpuUsedPc	**CPU %**	The percentage of CPU used by the process.
	id	Not applicable	The identifier of the process.
	memoryUsedPc	**MEM%**	The percentage of memory used by the process.
	name	Not applicable	The name of the process.
	parentID	Not applicable	The process identifier for the parent process of the process.

Group	Metric	Console name	Description
	rss	**RES**	The amount of RAM allocated to the process, in kilobytes.
	tgid	Not applicable	The thread group identifier, which is a number representing the process ID to which a thread belongs. This identifier is used to group threads from the same process.
	vss	**VIRT**	The amount of virtual memory allocated to the process, in kilobytes.
swap	total	**Swap**	The amount of swap memory available, in kilobytes.
	in	**Swaps in**	The amount of memory, in kilobytes, swapped in from disk.
	out	**Swaps out**	The amount of memory, in kilobytes, swapped out to disk.
	free	**Free Swap**	The amount of swap memory free, in kilobytes.
	cached	**Committed Swap**	The amount of swap memory, in kilobytes, used as cache memory.
tasks	blocked	**Tasks Blocked**	The number of tasks that are blocked.
	running	**Tasks Running**	The number of tasks that are running.
	sleeping	**Tasks Sleeping**	The number of tasks that are sleeping.
	stopped	**Tasks Stopped**	The number of tasks that are stopped.

Group	Metric	Console name	Description
	`total`	**Tasks Total**	The total number of tasks.
	`zombie`	**Tasks Zombie**	The number of child tasks that are inactive with an active parent task.

Monitoring events, logs, and streams in an Amazon Aurora DB cluster

When you monitor your Amazon Aurora databases and your other Amazon solutions, your goal is to maintain the following:

- Reliability
- Availability
- Performance
- Security

Monitoring metrics in an Amazon Aurora cluster explains how to monitor your cluster using metrics. A complete solution must also monitor database events, log files, and activity streams. Amazon provides you with the following monitoring tools:

- *Amazon EventBridge* is a serverless event bus service that makes it easy to connect your applications with data from a variety of sources. EventBridge delivers a stream of real-time data from your own applications, Software-as-a-Service (SaaS) applications, and Amazon services. EventBridge routes that data to targets such as Amazon Lambda. This way, you can monitor events that happen in services and build event-driven architectures. For more information, see the Amazon EventBridge User Guide.
- *Amazon CloudWatch Logs* provides a way to monitor, store, and access your log files from Amazon Aurora instances, Amazon CloudTrail, and other sources. Amazon CloudWatch Logs can monitor information in the log files and notify you when certain thresholds are met. You can also archive your log data in highly durable storage. For more information, see the Amazon CloudWatch Logs User Guide.
- *Amazon CloudTrail* captures API calls and related events made by or on behalf of your Amazon Web Services account. CloudTrail delivers the log files to an Amazon S3 bucket that you specify. You can identify which users and accounts called Amazon, the source IP address from which the calls were made, and when the calls occurred. For more information, see the Amazon CloudTrail User Guide.
- *Database Activity Streams* is an Amazon Aurora feature that provides a near real-time stream of the activity in your DB cluster. Amazon Aurora pushes activities to an Amazon Kinesis data stream. The Kinesis stream is created automatically. From Kinesis, you can configure Amazon

services such as Amazon Data Firehose and Amazon Lambda to consume the stream and store the data.

Topics

- Viewing logs, events, and streams in the Amazon RDS console
- Monitoring Amazon Aurora events
- Monitoring Amazon Aurora log files
- Monitoring Amazon Aurora API calls in Amazon CloudTrail
- Monitoring Amazon Aurora with Database Activity Streams
- Monitoring threats with Amazon GuardDuty RDS Protectionfor Amazon Aurora

Viewing logs, events, and streams in the Amazon RDS console

Amazon RDS integrates with Amazon Web Services services to show information about logs, events, and database activity streams in the RDS console.

The **Logs & events** tab for your Aurora DB cluster shows the following information:

- **Auto scaling policies and activities** – Shows policies and activities relating to the Aurora Auto Scaling feature. This information only appears in the **Logs & events** tab at the cluster level.
- **Amazon CloudWatch alarms** – Shows any metric alarms that you have configured for the DB instance in your Aurora cluster. If you haven't configured alarms, you can create them in the RDS console.
- **Recent events** – Shows a summary of events (environment changes) for your Aurora DB instance or cluster. For more information, see Viewing Amazon RDS events.
- **Logs** – Shows database log files generated by a DB instance in your Aurora cluster. For more information, see Monitoring Amazon Aurora log files.


The **Configuration** tab displays information about database activity streams.

To view logs, events, and streams for your AuroraDB cluster in the RDS console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.


3. Choose the name of the Aurora DB cluster that you want to monitor.

   The database page appears. The following example shows an Amazon Aurora PostgreSQL DB cluster named apga.

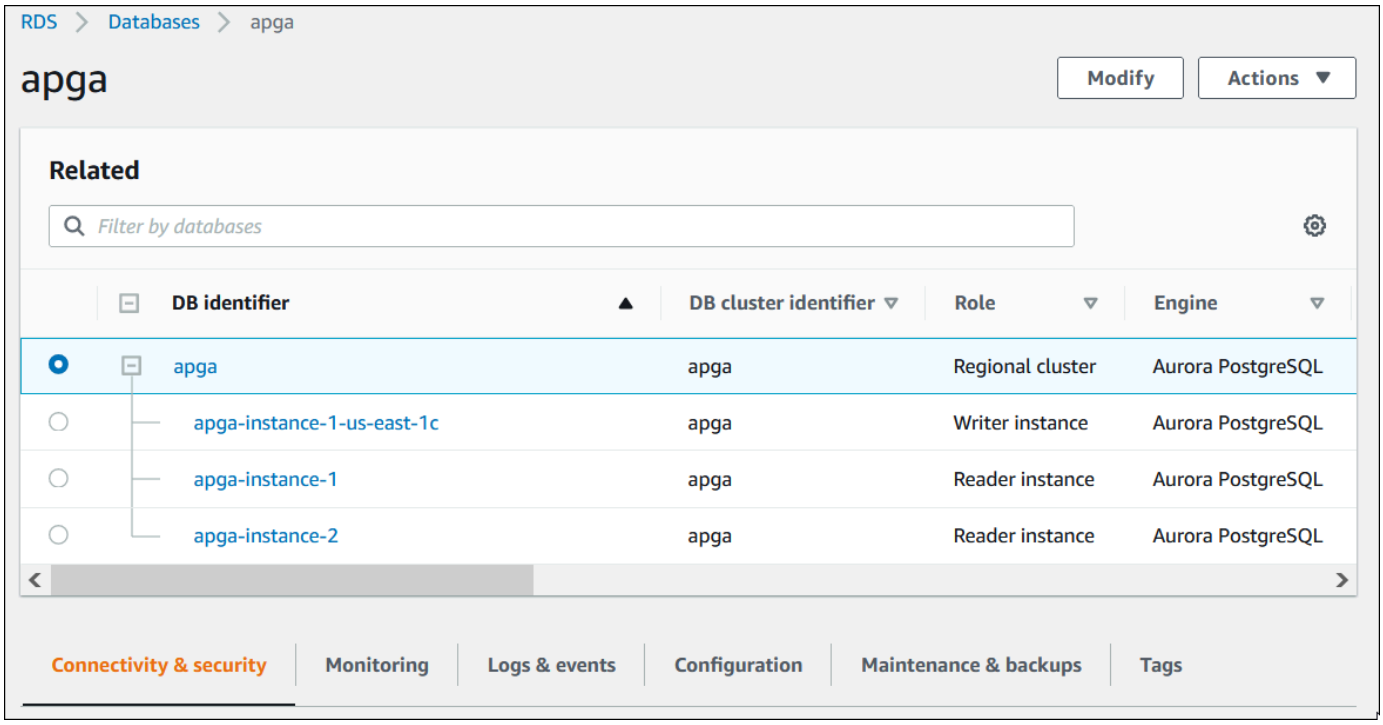


4. Scroll down and choose **Configuration**.

   The following example shows the status of the database activity streams for your cluster.

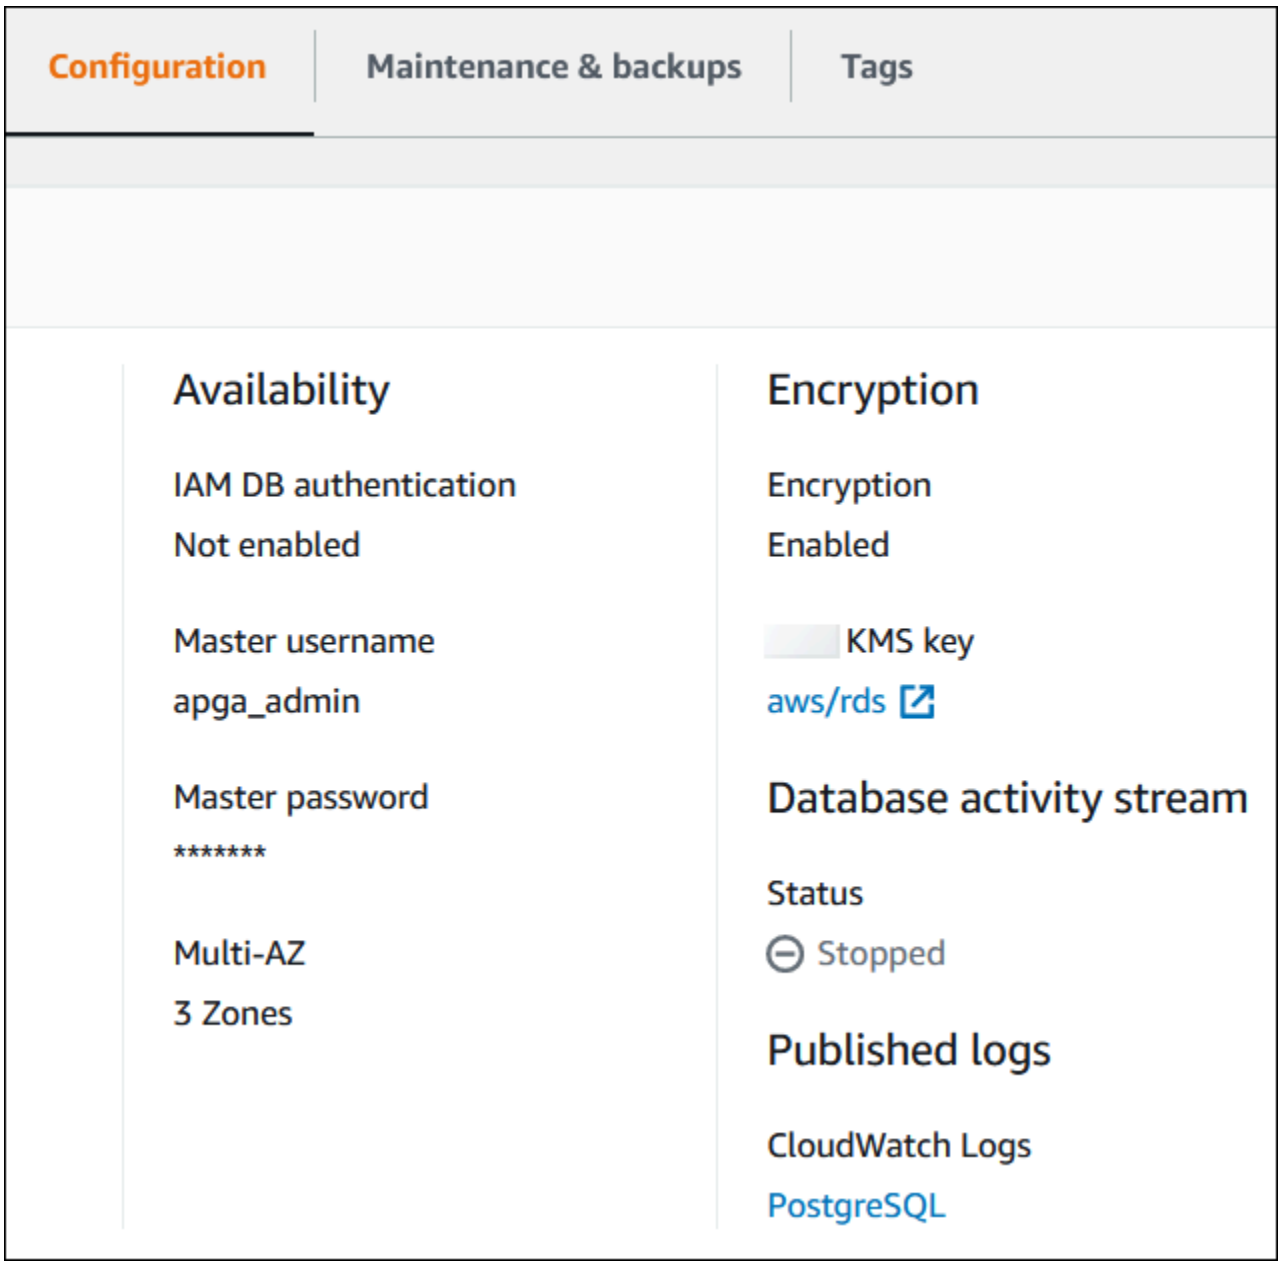


5. Choose **Logs & events**.

   The Logs & events section appears.

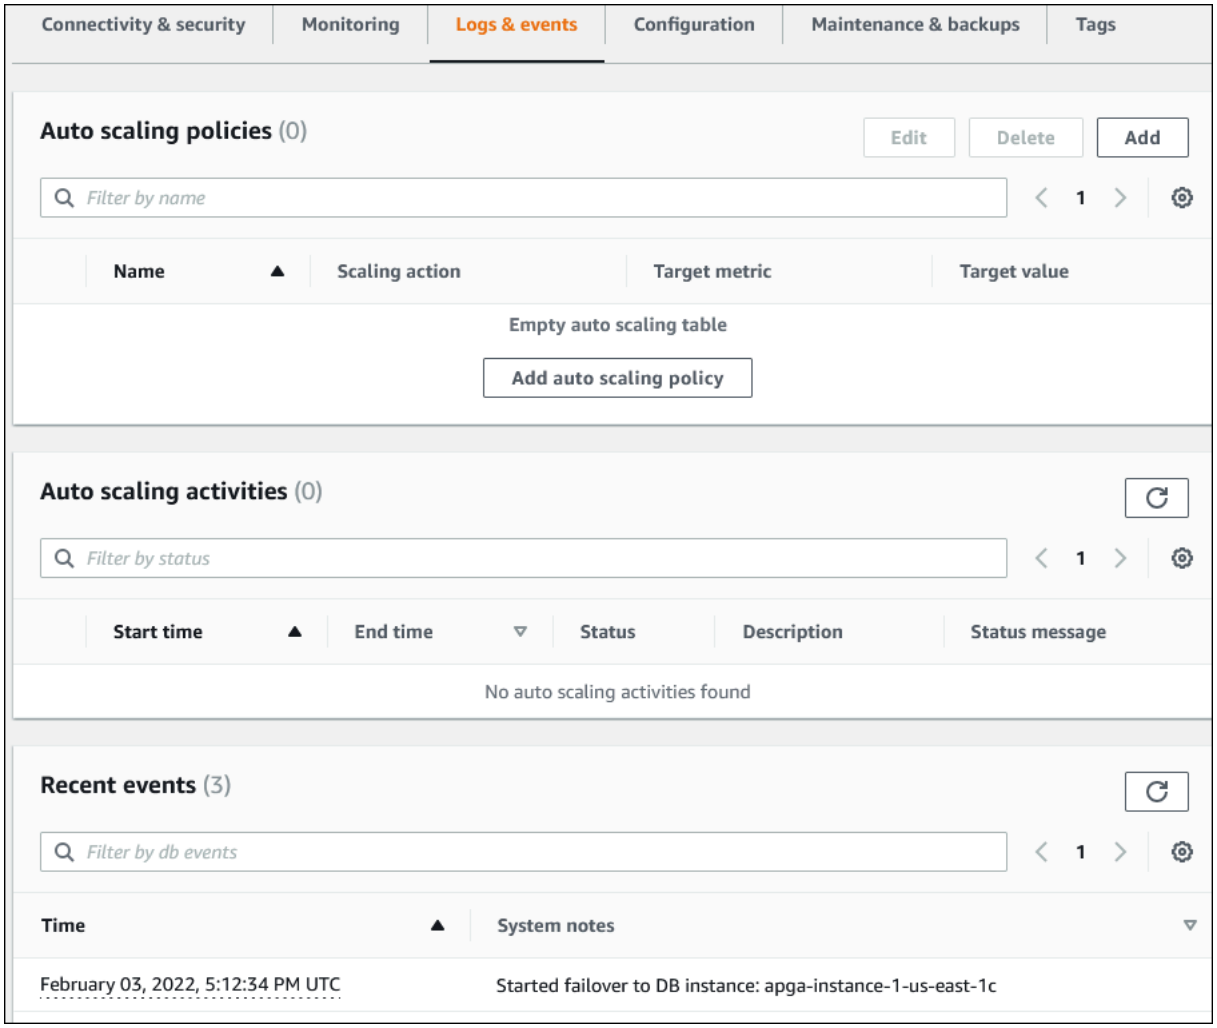

6. Choose a DB instance in your Aurora cluster, and then choose **Logs & events** for the instance.

   The following example shows that the contents are different between the DB instance page and the DB cluster page. The DB instance page shows logs and alarms.

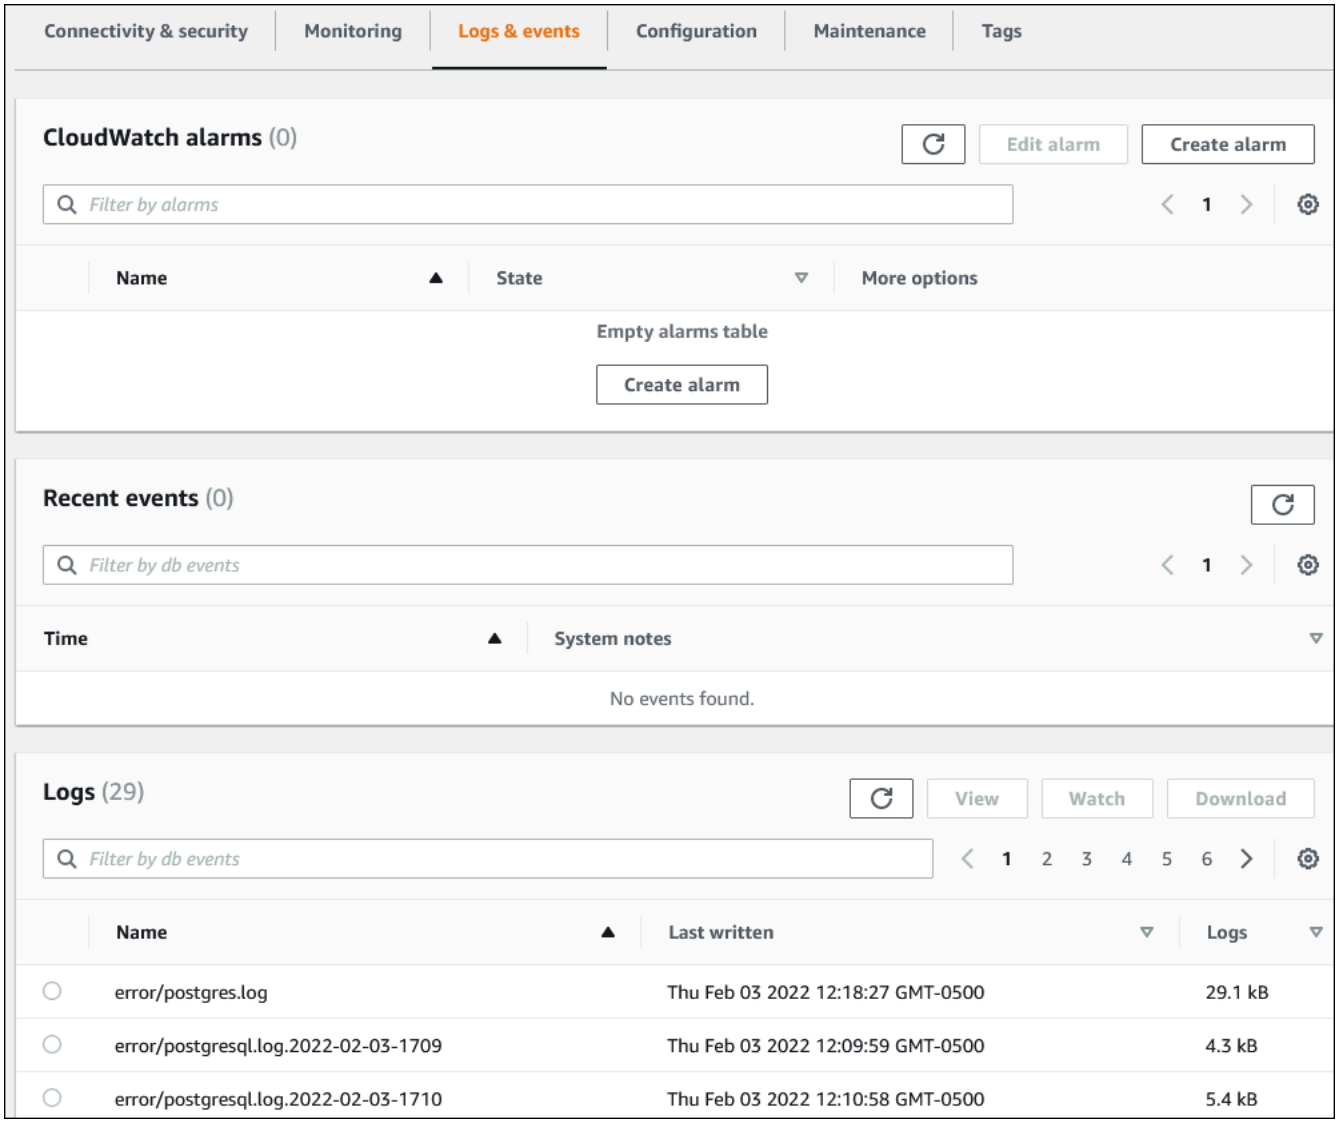
Connectivity & security
Monitoring
Logs & events
Configuration
Maintenance
Tags
CloudWatch alarms (0)
Edit alarm
Create alarm
Filter by alarms
1
Name
State
More options
Empty alarms table
Create alarm
Recent events (0)
Filter by db events
1
Time
System notes
No events found.
Logs (29)
View
Watch
Download
Filter by db events
1 2 3 4 5 6
Name
Last written
Logs
error/postgres.log
Thu Feb 03 2022 12:18:27 GMT-0500
29.1 kB
error/postgresql.log.2022-02-03-1709
Thu Feb 03 2022 12:09:59 GMT-0500
4.3 kB
error/postgresql.log.2022-02-03-1710
Thu Feb 03 2022 12:10:58 GMT-0500
5.4 kB

Monitoring Amazon Aurora events

An *event* indicates a change in an environment. This can be an Amazon environment, an SaaS partner service or application, or a custom application or service. For descriptions of the Aurora events, see Amazon RDS event categories and event messages for Aurora.

Topics

- Overview of events for Aurora
- Viewing Amazon RDS events
- Working with Amazon RDS event notification
- Creating a rule that triggers on an Amazon Aurora event
- Amazon RDS event categories and event messages for Aurora

Overview of events for Aurora

An *RDS event* indicates a change in the Aurora environment. For example, Amazon Aurora generates an event when a DB cluster is patched. Amazon Aurora delivers events to EventBridge in near-real time.

> **Note**
>
> Amazon RDS emits events on a best effort basis. We recommend that you avoid writing programs that depend on the order or existence of notification events, because they might be out of sequence or missing.

Amazon RDS records events that relate to the following resources:

- DB clusters

  For a list of cluster events, see DB cluster events.
- DB instances

  For a list of DB instance events, see DB instance events.
- DB parameter groups

  For a list of DB parameter group events, see DB parameter group events.

- DB security groups

  For a list of DB security group events, see DB security group events.
- DB cluster snapshots

  For a list of DB cluster snapshot events, see DB cluster snapshot events.
- RDS Proxy events

  For a list of RDS Proxy events, see RDS Proxy events.
- Blue/green deployment events

  For a list of blue/green deployment events, see Blue/green deployment events.

This information includes the following:

- The date and time of the event
- The source name and source type of the event
- A message associated with the event
- Event notifications include tags from when the message was sent and may not reflect tags at the time when the event occurred

Viewing Amazon RDS events

You can retrieve the following event information for your Amazon Aurora resources:

- Resource name
- Resource type
- Time of the event
- Message summary of the event

You can access events in the following parts of the Amazon Web Services Management Console:

- The **Events** tab, which shows events from the past 24 hours.
- The **Recent events** table in the **Logs & events** section in the **Databases** tab, which can show events for up to the past 2 weeks.

You can also retrieve events by using the describe-events Amazon CLI command, or the DescribeEvents RDS API operation. If you use the Amazon CLI or the RDS API to view events, you can retrieve events for up to the past 14 days.

> **Note**
>
> If you need to store events for longer periods of time, you can send Amazon RDS events to EventBridge. For more information, see Creating a rule that triggers on an Amazon Aurora event

For descriptions of the Amazon Aurora events, see Amazon RDS event categories and event messages for Aurora.

To access detailed information about events using Amazon CloudTrail, including request parameters, see CloudTrail events.

Console

To view all Amazon RDS events for the past 24 hours


1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

2. In the navigation pane, choose **Events**.

   The available events appear in a list.

3. (Optional) Enter a search term to filter your results.

   The following example shows a list of events filtered by the characters **apg**.

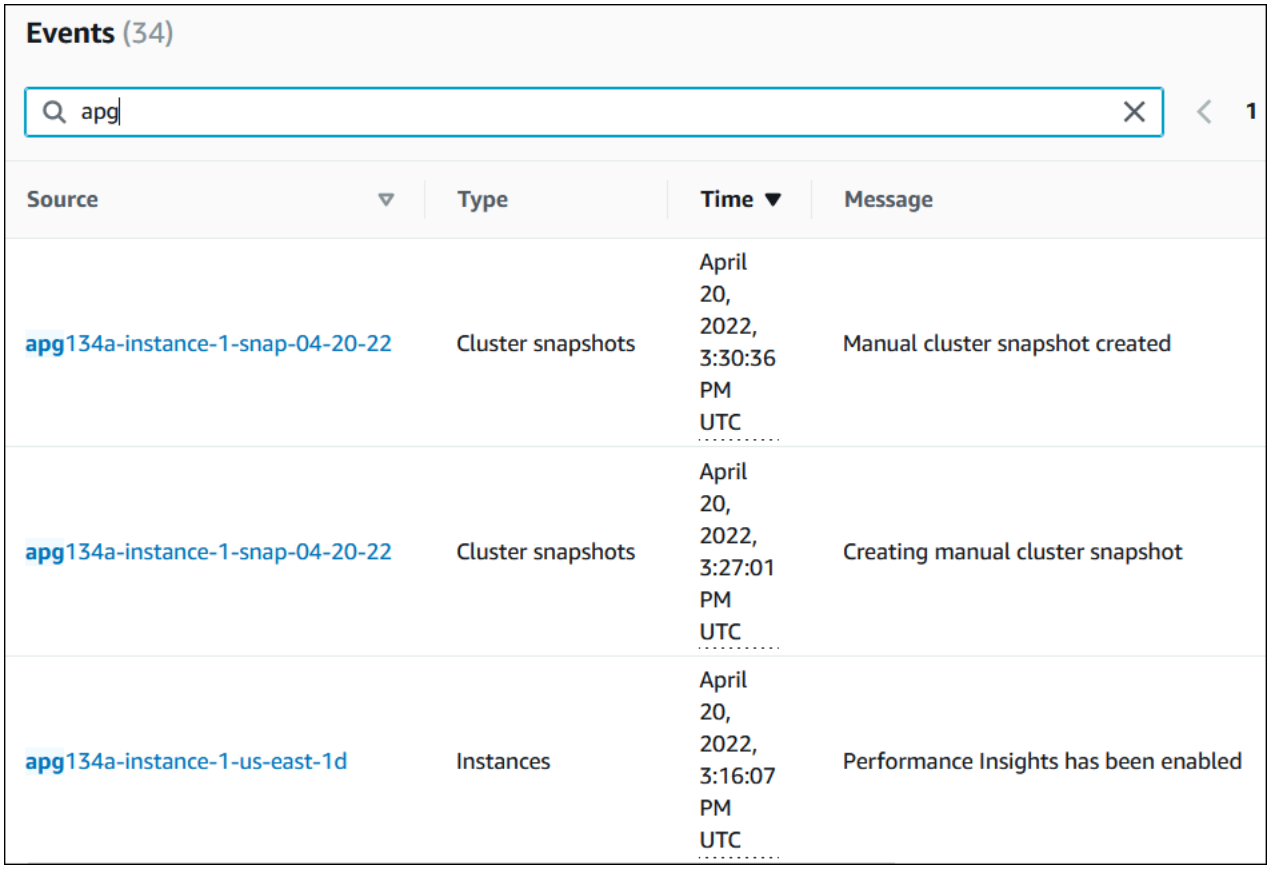

Amazon CLI

To view all events generated in the last hour, call [describe-events](#) with no parameters.

```
aws rds describe-events
```

The following sample output shows that a DB cluster instance has started recovery.

```
{
    "Events": [
        {
            "EventCategories": [
                "recovery"
```

```
            ],
            "SourceType": "db-instance",
            "SourceArn": "arn:aws:rds:us-east-1:123456789012:db:mycluster-instance-1",
            "Date": "2022-04-20T15:02:38.416Z",
            "Message": "Recovery of the DB instance has started. Recovery time will
 vary with the amount of data to be recovered.",
            "SourceIdentifier": "mycluster-instance-1"
        }, ...
```

To view all Amazon RDS events for the past 10080 minutes (7 days), call the [describe-events](#) Amazon CLI command and set the `--duration` parameter to `10080`.

```
aws rds describe-events --duration 10080
```

The following example shows the events in the specified time range for DB instance *`test-instance`*.

```
aws rds describe-events \
    --source-identifier test-instance \
    --source-type db-instance \
    --start-time 2022-03-13T22:00Z \
    --end-time 2022-03-13T23:59Z
```

The following sample output shows the status of a backup.

```
{
    "Events": [
        {
            "SourceType": "db-instance",
            "SourceIdentifier": "test-instance",
            "EventCategories": [
                "backup"
            ],
            "Message": "Backing up DB instance",
            "Date": "2022-03-13T23:09:23.983Z",
            "SourceArn": "arn:aws:rds:us-east-1:123456789012:db:test-instance"
        },
        {
            "SourceType": "db-instance",
            "SourceIdentifier": "test-instance",
            "EventCategories": [
                "backup"
```

```
            ],
            "Message": "Finished DB Instance backup",
            "Date": "2022-03-13T23:15:13.049Z",
            "SourceArn": "arn:aws:rds:us-east-1:123456789012:db:test-instance"
        }
    ]
}
```

API

You can view all Amazon RDS instance events for the past 14 days by calling the DescribeEvents RDS API operation and setting the `Duration` parameter to `20160`.

Working with Amazon RDS event notification

Amazon RDS uses the Amazon Simple Notification Service (Amazon SNS) to provide notification when an Amazon RDS event occurs. These notifications can be in any notification form supported by Amazon SNS for an Amazon Region, such as an email, a text message, or a call to an HTTP endpoint.

Topics

- Overview of Amazon RDS event notification
- Granting permissions to publish notifications to an Amazon SNS topic
- Subscribing to Amazon RDS event notification
- Amazon RDS event notification tags and attributes
- Listing Amazon RDS event notification subscriptions
- Modifying an Amazon RDS event notification subscription
- Adding a source identifier to an Amazon RDS event notification subscription
- Removing a source identifier from an Amazon RDS event notification subscription
- Listing the Amazon RDS event notification categories
- Deleting an Amazon RDS event notification subscription

Overview of Amazon RDS event notification

Amazon RDS groups events into categories that you can subscribe to so that you can be notified when an event in that category occurs.

Topics

- RDS resources eligible for event subscription
- Basic process for subscribing to Amazon RDS event notifications
- Delivery of RDS event notifications
- Billing for Amazon RDS event notifications
- Examples of Aurora events using Amazon EventBridge

RDS resources eligible for event subscription

For Amazon Aurora, events occur at both the DB cluster and the DB instance level. You can subscribe to an event category for the following resources:

- DB instance
- DB cluster
- DB cluster snapshot
- DB parameter group
- DB security group
- RDS Proxy
- Custom engine version

For example, if you subscribe to the backup category for a given DB instance, you're notified whenever a backup-related event occurs that affects the DB instance. If you subscribe to a configuration change category for a DB instance, you're notified when the DB instance is changed. You also receive notification when an event notification subscription changes.

You might want to create several different subscriptions. For example, you might create one subscription that receives all event notifications for all DB instances and another subscription that includes only critical events for a subset of the DB instances. For the second subscription, specify one or more DB instances in the filter.

Basic process for subscribing to Amazon RDS event notifications

The process for subscribing to Amazon RDS event notification is as follows:

1. You create an Amazon RDS event notification subscription by using the Amazon RDS console, Amazon CLI, or API.

   Amazon RDS uses the ARN of an Amazon SNS topic to identify each subscription. The Amazon RDS console creates the ARN for you when you create the subscription. Create the ARN by using the Amazon SNS console, the Amazon CLI, or the Amazon SNS API.
2. Amazon RDS sends an approval email or SMS message to the addresses you submitted with your subscription.
3. You confirm your subscription by choosing the link in the notification you received.

4. The Amazon RDS console updates the **My Event Subscriptions** section with the status of your subscription.
5. Amazon RDS begins sending the notifications to the addresses that you provided when you created the subscription.

To learn about identity and access management when using Amazon SNS, see Identity and access management in Amazon SNS in the *Amazon Simple Notification Service Developer Guide*.

You can use Amazon Lambda to process event notifications from a DB instance. For more information, see Using Amazon Lambda with Amazon RDS in the *Amazon Lambda Developer Guide*.

Delivery of RDS event notifications

Amazon RDS sends notifications to the addresses that you provide when you create the subscription. The notification can include message attributes which provide structured metadata about the message. For more information about message attributes, see Amazon RDS event categories and event messages for Aurora.

Event notifications might take up to five minutes to be delivered.

> **Important**
>
> Amazon RDS doesn't guarantee the order of events sent in an event stream. The event order is subject to change.

When Amazon SNS sends a notification to a subscribed HTTP or HTTPS endpoint, the POST message sent to the endpoint has a message body that contains a JSON document. For more information, see Amazon SNS message and JSON formats in the *Amazon Simple Notification Service Developer Guide*.

You can configure SNS to notify you with text messages. For more information, see Mobile text messaging (SMS) in the *Amazon Simple Notification Service Developer Guide*.

To turn off notifications without deleting a subscription, choose **No** for **Enabled** in the Amazon RDS console. Or you can set the `Enabled` parameter to `false` using the Amazon CLI or Amazon RDS API.

Billing for Amazon RDS event notifications

Billing for Amazon RDS event notification is through Amazon SNS. Amazon SNS fees apply when using event notification. For more information about Amazon SNS billing, see Amazon Simple Notification Service pricing.

Examples of Aurora events using Amazon EventBridge

The following examples illustrate different types of Aurora events in JSON format. For a tutorial that shows you how to capture and view events in JSON format, see Tutorial: Log DB instance state changes using Amazon EventBridge.

Topics

- Example of a DB cluster event
- Example of a DB parameter group event
- Example of a DB cluster snapshot event

Example of a DB cluster event

The following is an example of a DB cluster event in JSON format. The event shows that the cluster named `my-db-cluster` was patched. The event ID is `RDS-EVENT-0173`.

```
{
  "version": "0",
  "id": "844e2571-85d4-695f-b930-0153b71dcb42",
  "detail-type": "RDS DB Cluster Event",
  "source": "aws.rds",
  "account": "123456789012",
  "time": "2018-10-06T12:26:13Z",
  "region": "us-east-1",
  "resources": [
    "arn:aws-cn:rds:us-east-1:123456789012:cluster:my-db-cluster"
  ],
  "detail": {
    "EventCategories": [
      "notification"
    ],
    "SourceType": "CLUSTER",
    "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:my-db-cluster",
    "Date": "2018-10-06T12:26:13.882Z",
    "Message": "Database cluster has been patched",
```

```
    "SourceIdentifier": "my-db-cluster",
    "EventID": "RDS-EVENT-0173"
  }
}
```

Example of a DB parameter group event

The following is an example of a DB parameter group event in JSON format. The event shows that the parameter `time_zone` was updated in parameter group `my-db-param-group`. The event ID is RDS-EVENT-0037.

```
{
  "version": "0",
  "id": "844e2571-85d4-695f-b930-0153b71dcb42",
  "detail-type": "RDS DB Parameter Group Event",
  "source": "aws.rds",
  "account": "123456789012",
  "time": "2018-10-06T12:26:13Z",
  "region": "us-east-1",
  "resources": [
    "arn:aws-cn:rds:us-east-1:123456789012:pg:my-db-param-group"
  ],
  "detail": {
    "EventCategories": [
      "configuration change"
    ],
    "SourceType": "DB_PARAM",
    "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:pg:my-db-param-group",
    "Date": "2018-10-06T12:26:13.882Z",
    "Message": "Updated parameter time_zone to UTC with apply method immediate",
    "SourceIdentifier": "my-db-param-group",
    "EventID": "RDS-EVENT-0037"
  }
}
```

Example of a DB cluster snapshot event

The following is an example of a DB cluster snapshot event in JSON format. The event shows the creation of the snapshot named `my-db-cluster-snapshot`. The event ID is RDS-EVENT-0074.

```
{
  "version": "0",
```

```
  "id": "844e2571-85d4-695f-b930-0153b71dcb42",
  "detail-type": "RDS DB Cluster Snapshot Event",
  "source": "aws.rds",
  "account": "123456789012",
  "time": "2018-10-06T12:26:13Z",
  "region": "us-east-1",
  "resources": [
    "arn:aws-cn:rds:us-east-1:123456789012:cluster-snapshot:rds:my-db-cluster-snapshot"
  ],
  "detail": {
    "EventCategories": [
      "backup"
    ],
    "SourceType": "CLUSTER_SNAPSHOT",
    "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster-snapshot:rds:my-db-
cluster-snapshot",
    "Date": "2018-10-06T12:26:13.882Z",
    "SourceIdentifier": "my-db-cluster-snapshot",
    "Message": "Creating manual cluster snapshot",
    "EventID": "RDS-EVENT-0074"
  }
}
```

Granting permissions to publish notifications to an Amazon SNS topic

To grant Amazon RDS permissions to publish notifications to an Amazon Simple Notification Service (Amazon SNS) topic, attach an Amazon Identity and Access Management (IAM) policy to the destination topic. For more information about permissions, see Example cases for Amazon Simple Notification Service access control in the *Amazon Simple Notification Service Developer Guide*.

By default, an Amazon SNS topic has a policy allowing all Amazon RDS resources within the same account to publish notifications to it. You can attach a custom policy to allow cross-account notifications, or to restrict access to certain resources.

The following is an example of an IAM policy that you attach to the destination Amazon SNS topic. It restricts the topic to DB instances with names that match the specified prefix. To use this policy, specify the following values:

- `Resource` – The Amazon Resource Name (ARN) for your Amazon SNS topic
- `SourceARN` – Your RDS resource ARN
- `SourceAccount` – Your Amazon Web Services account ID

To see a list of resource types and their ARNs, see Resources Defined by Amazon RDS in the *Service Authorization Reference*.

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {
        "Service": "events.rds.amazonaws.com"
      },
      "Action": [
        "sns:Publish"
      ],
      "Resource": "arn:aws-cn:sns:us-east-1:123456789012:topic_name",
      "Condition": {
        "ArnLike": {
          "aws:SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:db:prefix-*"
        },
```

```
        "StringEquals": {
          "aws:SourceAccount": "123456789012"
        }
      }
    }
  ]
}
```

Subscribing to Amazon RDS event notification

The simplest way to create a subscription is with the RDS console. If you choose to create event notification subscriptions using the CLI or API, you must create an Amazon Simple Notification Service topic and subscribe to that topic with the Amazon SNS console or Amazon SNS API. You will also need to retain the Amazon Resource Name (ARN) of the topic because it is used when submitting CLI commands or API operations. For information on creating an SNS topic and subscribing to it, see Getting started with Amazon SNS in the *Amazon Simple Notification Service Developer Guide*.

You can specify the type of source you want to be notified of and the Amazon RDS source that triggers the event:

Source type

The type of source. For example, **Source type** might be **Instances**. You must choose a source type.

Resources **to include**

The Amazon RDS resources that are generating the events. For example, you might choose **Select specific instances** and then **myDBInstance1**.

The following table explains the result when you specify or don't specify ***Resources*** **to include**.

Resources to include	Description	Example
Specified	RDS notifies you about all events for the specified resource only.	If your **Source type** is **Instances** and your resource is **myDBInstance1**, RDS notifies you about all events for myDBInstance1 only.
Not specified	RDS notifies you about the events for the specified source type for all your Amazon RDS resources.	If your **Source type** is **Instances**, RDS notifies you about all instance-related events in your account.

An Amazon SNS topic subscriber receives every message published to the topic by default. To receive only a subset of the messages, the subscriber must assign a filter policy to the topic subscription. For more information about SNS message filtering, see Amazon SNS message filtering in the *Amazon Simple Notification Service Developer Guide*

Console

To subscribe to RDS event notification

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In navigation pane, choose **Event subscriptions**.
3. In the **Event subscriptions** pane, choose **Create event subscription**.
4. Enter your subscription details as follows:

   a. For **Name**, enter a name for the event notification subscription.

   b. For **Send notifications to**, do one of the following:


   - Choose **New email topic**. Enter a name for your email topic and a list of recipients. We recommend that you configure the events subscriptions to the same email address as your primary account contact. The recommendations, service events, and personal health messages are sent using different channels. The subscriptions to the same email address ensures that all the messages are consolidated in one location.
   - Choose **Amazon Resource Name (ARN)**. Then choose existing Amazon SNS ARN for an Amazon SNS topic.

     If you want to use a topic that has been enabled for server-side encryption (SSE), grant Amazon RDS the necessary permissions to access the Amazon KMS key. For more information, see Enable compatibility between event sources from Amazon services and encrypted topics in the *Amazon Simple Notification Service Developer Guide*.

   c. For **Source type**, choose a source type. For example, choose **Clusters** or **Cluster snapshots**.


   d. Choose the event categories and resources that you want to receive event notifications for.

   The following example configures event notifications for the DB instance named `testinst`.

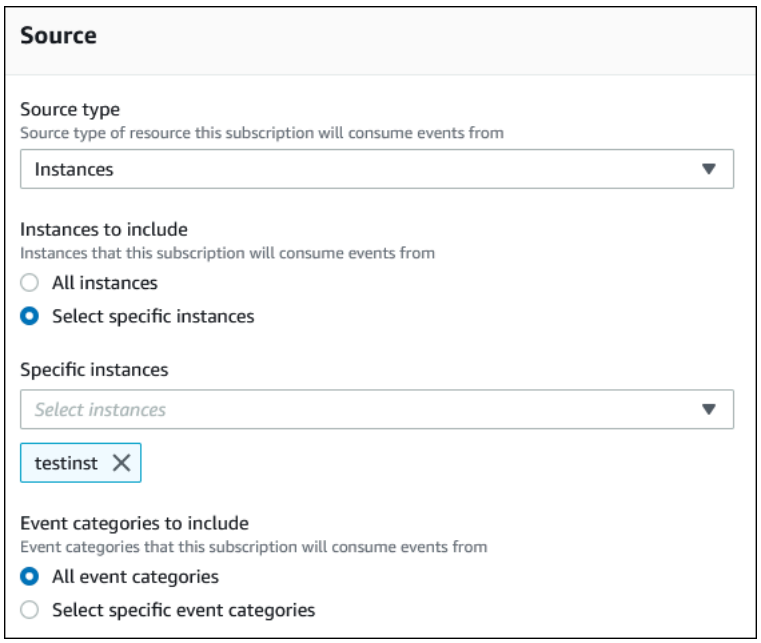

e. Choose **Create**.

The Amazon RDS console indicates that the subscription is being created.

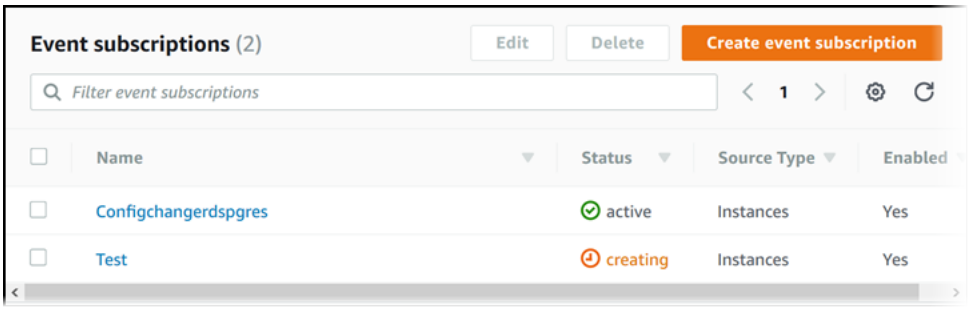

Amazon CLI

To subscribe to RDS event notification, use the Amazon CLI `create-event-subscription` command. Include the following required parameters:

- `--subscription-name`
- `--sns-topic-arn`

Example

For Linux, macOS, or Unix:

```
aws rds create-event-subscription \
```

```
    --subscription-name myeventsubscription \
    --sns-topic-arn arn:aws-cn:sns:us-east-1:123456789012:myawsuser-RDS \
    --enabled
```

For Windows:

```
aws rds create-event-subscription ^
    --subscription-name myeventsubscription ^
    --sns-topic-arn arn:aws-cn:sns:us-east-1:123456789012:myawsuser-RDS ^
    --enabled
```

API

To subscribe to Amazon RDS event notification, call the Amazon RDS API function `CreateEventSubscription`. Include the following required parameters:

- `SubscriptionName`
- `SnsTopicArn`

Amazon RDS event notification tags and attributes

When Amazon RDS sends an event notification to Amazon Simple Notification Service (SNS) or Amazon EventBridge, the notification contains message attributes and event tags. RDS sends the message attributes separately along with the message, while the event tags are in the body of the message. Use the message attributes and the Amazon RDS tags to add metadata to your resources. You can modify these tags with your own notations about the DB instances, Aurora clusters, and so on. For more information about tagging Amazon RDS resources, see Tagging Amazon Aurora andAmazon RDS resources.

By default, the Amazon SNS and Amazon EventBridge receives every message sent to them. SNS and EventBridge can filter the message and send the notifications to the preferred communication mode, such as an email, a text message, or a call to an HTTP endpoint.

> **Note**
>
> The notification sent in an email or a text message will not have event tags.

The following table shows the message attributes for RDS events sent to the topic subscriber.

Amazon RDS event attribute	Description
EventID	Identifier for the RDS event message, for example, RDS-EVENT-0006.
Resource	The ARN identifier for the resource emitting the event, for example, `arn:aws:rds:ap-southeast-2:123456789012:db:database-1` .

The RDS tags provide data about the resource that was affected by the service event. RDS adds the current state of the tags in the message body when the notification is sent to SNS or EventBridge.

For more information about filtering message attributes for SNS, see Amazon SNS message filtering in the *Amazon Simple Notification Service Developer Guide*.

For more information about filtering event tags for EventBridge, see Comparison operators for use in event patterns in Amazon EventBridge in the *Amazon EventBridge User Guide*.

For more information about filtering payload-based tags for SNS, see Introducing payload-based message filtering for Amazon SNS


Listing Amazon RDS event notification subscriptions

You can list your current Amazon RDS event notification subscriptions.

Console

To list your current Amazon RDS event notification subscriptions

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Event subscriptions**. The **Event subscriptions** pane shows all your event notification subscriptions.

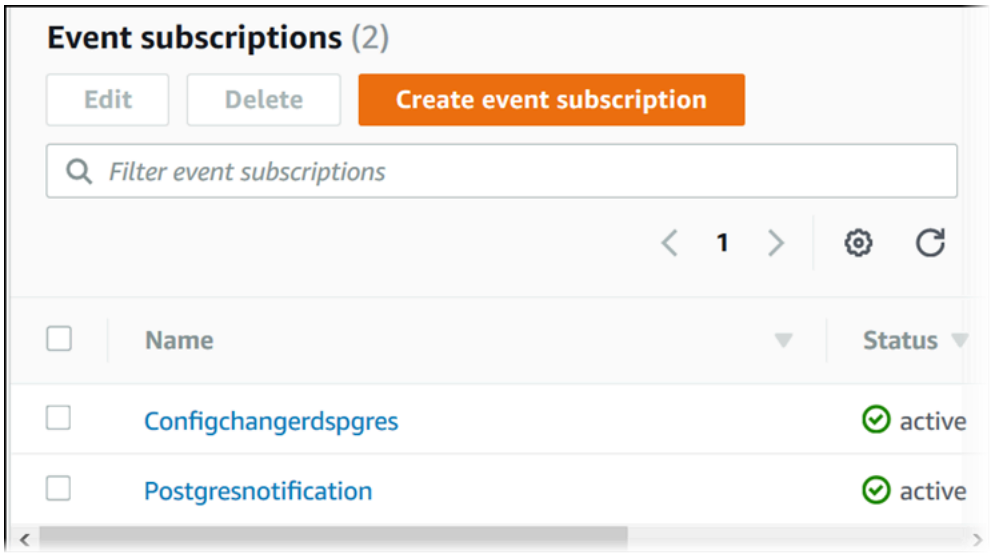

Amazon CLI

To list your current Amazon RDS event notification subscriptions, use the Amazon CLI `describe-event-subscriptions` command.

Example

The following example describes all event subscriptions.

```
aws rds describe-event-subscriptions
```

The following example describes the `myfirsteventsubscription`.

```
aws rds describe-event-subscriptions --subscription-name myfirsteventsubscription
```

API

To list your current Amazon RDS event notification subscriptions, call the Amazon RDS API `DescribeEventSubscriptions` action.


Modifying an Amazon RDS event notification subscription

After you have created a subscription, you can change the subscription name, source identifier, categories, or topic ARN.

Console

To modify an Amazon RDS event notification subscription

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Event subscriptions**.
3. In the **Event subscriptions** pane, choose the subscription that you want to modify and choose **Edit**.
4. Make your changes to the subscription in either the **Target** or **Source** section.
5. Choose **Edit**. The Amazon RDS console indicates that the subscription is being modified.

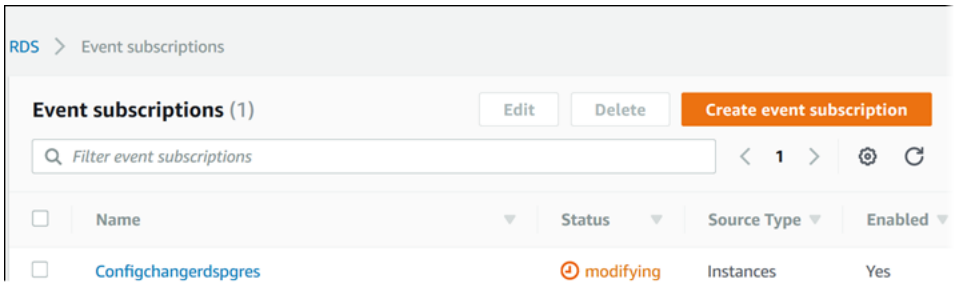

Amazon CLI

To modify an Amazon RDS event notification subscription, use the Amazon CLI `modify-event-subscription` command. Include the following required parameter:

- `--subscription-name`

Example

The following code enables `myeventsubscription`.

For Linux, macOS, or Unix:

```
aws rds modify-event-subscription \
```

```
    --subscription-name myeventsubscription \
    --enabled
```

For Windows:

```
aws rds modify-event-subscription ^
    --subscription-name myeventsubscription ^
    --enabled
```

API

To modify an Amazon RDS event, call the Amazon RDS API operation `ModifyEventSubscription`. Include the following required parameter:

- `SubscriptionName`

Adding a source identifier to an Amazon RDS event notification subscription

You can add a source identifier (the Amazon RDS source generating the event) to an existing subscription.

Console

You can easily add or remove source identifiers using the Amazon RDS console by selecting or deselecting them when modifying a subscription. For more information, see Modifying an Amazon RDS event notification subscription.

Amazon CLI

To add a source identifier to an Amazon RDS event notification subscription, use the Amazon CLI `add-source-identifier-to-subscription` command. Include the following required parameters:

- `--subscription-name`
- `--source-identifier`

Example

The following example adds the source identifier `mysqldb` to the `myrdseventsubscription` subscription.

For Linux, macOS, or Unix:

```
aws rds add-source-identifier-to-subscription \
    --subscription-name myrdseventsubscription \
    --source-identifier mysqldb
```

For Windows:

```
aws rds add-source-identifier-to-subscription ^
    --subscription-name myrdseventsubscription ^
    --source-identifier mysqldb
```

API

To add a source identifier to an Amazon RDS event notification subscription, call the Amazon RDS API `AddSourceIdentifierToSubscription`. Include the following required parameters:

- `SubscriptionName`
- `SourceIdentifier`

Removing a source identifier from an Amazon RDS event notification subscription

You can remove a source identifier (the Amazon RDS source generating the event) from a subscription if you no longer want to be notified of events for that source.

Console

You can easily add or remove source identifiers using the Amazon RDS console by selecting or deselecting them when modifying a subscription. For more information, see Modifying an Amazon RDS event notification subscription.

Amazon CLI

To remove a source identifier from an Amazon RDS event notification subscription, use the Amazon CLI `remove-source-identifier-from-subscription` command. Include the following required parameters:

- `--subscription-name`
- `--source-identifier`

Example

The following example removes the source identifier `mysqldb` from the `myrdseventsubscription` subscription.

For Linux, macOS, or Unix:

```
aws rds remove-source-identifier-from-subscription \
    --subscription-name myrdseventsubscription \
    --source-identifier mysqldb
```

For Windows:

```
aws rds remove-source-identifier-from-subscription ^
    --subscription-name myrdseventsubscription ^
    --source-identifier mysqldb
```

API

To remove a source identifier from an Amazon RDS event notification subscription, use the Amazon RDS API `RemoveSourceIdentifierFromSubscription` command. Include the following required parameters:


- `SubscriptionName`
- `SourceIdentifier`

Listing the Amazon RDS event notification categories

All events for a resource type are grouped into categories. To view the list of categories available, use the following procedures.

Console

When you create or modify an event notification subscription, the event categories are displayed in the Amazon RDS console. For more information, see Modifying an Amazon RDS event notification subscription.

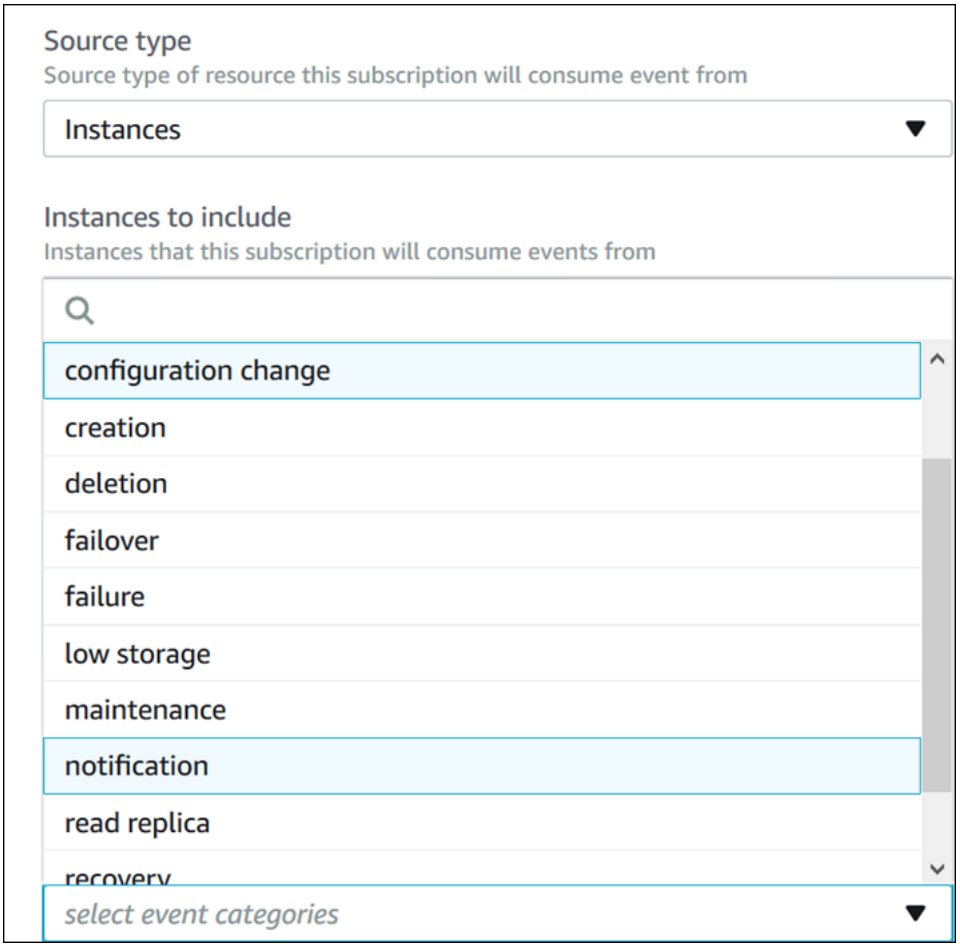

Amazon CLI

To list the Amazon RDS event notification categories, use the Amazon CLI `describe-event-categories` command. This command has no required parameters.

Example

```
aws rds describe-event-categories
```

API

To list the Amazon RDS event notification categories, use the Amazon RDS API `DescribeEventCategories` command. This command has no required parameters.


Deleting an Amazon RDS event notification subscription

You can delete a subscription when you no longer need it. All subscribers to the topic will no longer receive event notifications specified by the subscription.

Console

To delete an Amazon RDS event notification subscription

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **DB Event Subscriptions**.
3. In the **My DB Event Subscriptions** pane, choose the subscription that you want to delete.
4. Choose **Delete**.
5. The Amazon RDS console indicates that the subscription is being deleted.

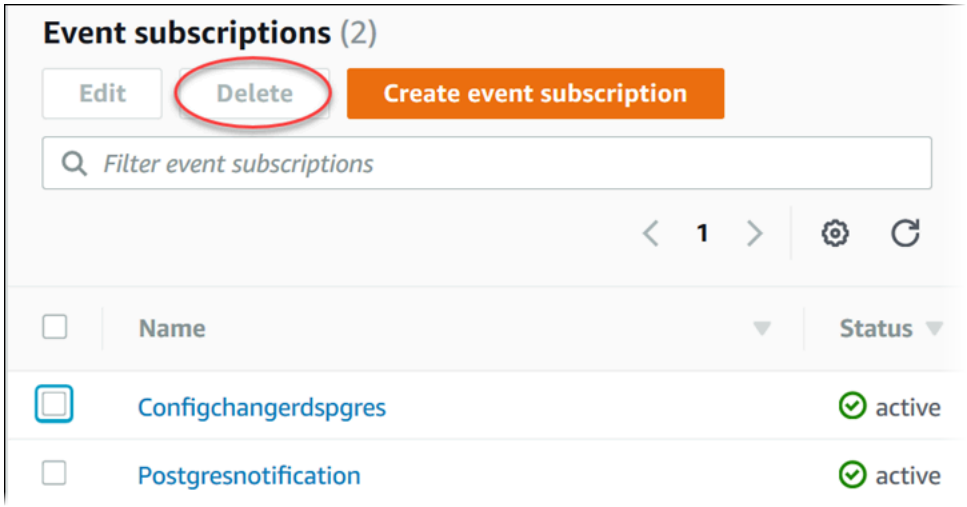

Amazon CLI

To delete an Amazon RDS event notification subscription, use the Amazon CLI `delete-event-subscription` command. Include the following required parameter:

- `--subscription-name`

Example

The following example deletes the subscription `myrdssubscription`.

```
aws rds delete-event-subscription --subscription-name myrdssubscription
```

API

To delete an Amazon RDS event notification subscription, use the RDS API `DeleteEventSubscription` command. Include the following required parameter:

- `SubscriptionName`

Creating a rule that triggers on an Amazon Aurora event

Using Amazon EventBridge, you can automate Amazon services and respond to system events such as application availability issues or resource changes.

Topics

- Tutorial: Log DB instance state changes using Amazon EventBridge

Tutorial: Log DB instance state changes using Amazon EventBridge

In this tutorial, you create an Amazon Lambda function that logs the state changes for an instance. You then create a rule that runs the function whenever there is a state change of an existing RDS DB instance. The tutorial assumes that you have a small running test instance that you can shut down temporarily.

> **Important**
>
> Don't perform this tutorial on a running production DB instance.

Topics

- Step 1: Create an Amazon Lambda function
- Step 2: Create a rule
- Step 3: Test the rule

Step 1: Create an Amazon Lambda function

Create a Lambda function to log the state change events. You specify this function when you create your rule.

To create a Lambda function

1. Open the Amazon Lambda console at https://console.amazonaws.cn/lambda/.
2. If you're new to Lambda, you see a welcome page. Choose **Get Started Now**. Otherwise, choose **Create function**.
3. Choose **Author from scratch**.
4. On the **Create function** page, do the following:

a. Enter a name and description for the Lambda function. For example, name the function **`RDSInstanceStateChange`**.

b. In **Runtime**, select **Node.js 16x**.

c. For **Architecture**, choose **x86_64**.

d. For **Execution role**, do either of the following:

- Choose **Create a new role with basic Lambda permissions**.
- For **Existing role**, choose **Use an existing role**. Choose the role that you want to use.

e. Choose **Create function**.

5. On the **RDSInstanceStateChange** page, do the following:

a. In **Code source**, select **index.js**.

b. In the **index.js** pane, delete the existing code.

c. Enter the following code:

```
console.log('Loading function');

exports.handler = async (event, context) => {
    console.log('Received event:', JSON.stringify(event));
};
```

d. Choose **Deploy**.

Step 2: Create a rule

Create a rule to run your Lambda function whenever you launch an Amazon RDS instance.

To create the EventBridge rule

1. Open the Amazon EventBridge console at https://console.amazonaws.cn/events/.
2. In the navigation pane, choose **Rules**.
3. Choose **Create rule**.
4. Enter a name and description for the rule. For example, enter **`RDSInstanceStateChangeRule`**.
5. Choose **Rule with an event pattern**, and then choose **Next**.
6. For **Event source**, choose **Amazon events or EventBridge partner events**.

7. Scroll down to the **Event pattern** section.
8. For **Event source**, choose **Amazon Web Services services**.
9. For **Amazon service**, choose **Relational Database Service (RDS)**.
10. For **Event type**, choose **RDS DB Instance Event**.
11. Leave the default event pattern. Then choose **Next**.
12. For **Target types**, choose **Amazon service**.
13. For **Select a target**, choose **Lambda function**.
14. For **Function**, choose the Lambda function that you created. Then choose **Next**.
15. In **Configure tags**, choose **Next**.
16. Review the steps in your rule. Then choose **Create rule**.

Step 3: Test the rule

To test your rule, shut down an RDS DB instance. After waiting a few minutes for the instance to shut down, verify that your Lambda function was invoked.

To test your rule by stopping a DB instance

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Stop an RDS DB instance.
3. Open the Amazon EventBridge console at https://console.amazonaws.cn/events/.
4. In the navigation pane, choose **Rules**, choose the name of the rule that you created.
5. In **Rule details**, choose **Monitoring**.

   You are redirected to the Amazon CloudWatch console. If you are not redirected, choose **View the metrics in CloudWatch**.
6. In **All metrics**, choose the name of the rule that you created.

   The graph should indicate that the rule was invoked.
7. In the navigation pane, choose **Log groups**.
8. Choose the name of the log group for your Lambda function (**/aws/lambda/*function-name***).
9. Choose the name of the log stream to view the data provided by the function for the instance that you launched. You should see a received event similar to the following:

```
{
    "version": "0",
    "id": "12a345b6-78c9-01d2-34e5-123f4ghi5j6k",
    "detail-type": "RDS DB Instance Event",
    "source": "aws.rds",
    "account": "111111111111",
    "time": "2021-03-19T19:34:09Z",
    "region": "us-east-1",
    "resources": [
        "arn:aws-cn:rds:us-east-1:111111111111:db:testdb"
    ],
    "detail": {
        "EventCategories": [
            "notification"
        ],
        "SourceType": "DB_INSTANCE",
        "SourceArn": "arn:aws-cn:rds:us-east-1:111111111111:db:testdb",
        "Date": "2021-03-19T19:34:09.293Z",
        "Message": "DB instance stopped",
        "SourceIdentifier": "testdb",
        "EventID": "RDS-EVENT-0087"
    }
}
```


For more examples of RDS events in JSON format, see Overview of events for Aurora.

10. (Optional) When you're finished, you can open the Amazon RDS console and start the instance that you stopped.

Amazon RDS event categories and event messages for Aurora

Amazon RDS generates a significant number of events in categories that you can subscribe to using the Amazon RDS Console, Amazon CLI, or the API.

Topics

- DB cluster events
- DB cluster snapshot events
- DB instance events
- DB parameter group events
- DB security group events
- DB shard group events
- RDS Proxy events
- Blue/green deployment events

DB cluster events

The following table shows the event category and a list of events when a DB cluster is the source type.

> **Note**
>
> No event category exists for Aurora Serverless in the DB cluster event type. The Aurora Serverless events range from RDS-EVENT-0141 to RDS-EVENT-0149.

Category	RDS event ID	Message	Notes
configuration change	RDS-EVENT-0016	Reset master credentials.	None
configuration change	RDS-EVENT-0179	Database Activity Streams is started on your database cluster.	For more information see Monitoring Amazon Aurora with Database Activity Streams.

Category	RDS event ID	Message	Notes
configuration change	RDS-EVENT-0180	Database Activity Streams is stopped on your database cluster.	For more information see Monitoring Amazon Aurora with Database Activity Streams.
creation	RDS-EVENT-0170	DB cluster created.	None
deletion	RDS-EVENT-0171	DB cluster deleted.	None
failover	RDS-EVENT-0069	Cluster failover failed, check the health of your cluster instances and try again.	None
failover	RDS-EVENT-0070	Promoting previous primary again: *name*.	None
failover	RDS-EVENT-0071	Completed failover to DB instance: *name*.	None
failover	RDS-EVENT-0072	Started same AZ failover to DB instance: *name*.	None
failover	RDS-EVENT-0073	Started cross AZ failover to DB instance: *name*.	None

Category	RDS event ID	Message	Notes
failure	RDS-EVENT-0083	Amazon RDS has been unable to create credentials to access your Amazon S3 Bucket for your DB cluster *name*. This is due to the S3 snapshot ingestion IAM role not being configured correctly in your account or the specified Amazon S3 bucket cannot be found. Please refer to the troubleshooting section in the Amazon RDS documentation for further details.	For more information, see Physical migration from MySQL by using Percona XtraBackup and Amazon S3 .
failure	RDS-EVENT-0143	The DB cluster failed to scale from *units* to *units* for this reason: *reason*.	Scaling failed for the Aurora Serverless DB cluster.
failure	RDS-EVENT-0354	You can't create the DB cluster because of incompatible resources. *message*.	The *message* includes details about the failure.
failure	RDS-EVENT-0355	The DB cluster can't be created because of insufficient resource limits. *message*.	The *message* includes details about the failure.

Category	RDS event ID	Message	Notes
failure	RDS-EVENT-0387	Failed to partition DB instances in DB cluster *name* for patching.	The operating system upgrades for the DB instances in the DB cluster failed.
failure	RDS-EVENT-0517	The *upgrade_type* version upgrade for DB cluster *name* was canceled because a failover occurred on the associate d global database. The DB cluster is now running engine version *version*. Retry the upgrade when the global database is available.	Retry the upgrade when the global database is available.
global failover	RDS-EVENT-0181	Global switchover to DB cluster *name* in Region *name* started.	This event is for a switchover operation (previously called "managed planned failover"). The process can be delayed because other operation s are running on the DB cluster.

Category	RDS event ID	Message	Notes
global failover	RDS-EVENT-0182	Old primary DB cluster *name* in Region *name* successfully shut down.	This event is for a switchover operation (previously called "managed planned failover"). The old primary instance in the global database isn't accepting writes. All volumes are synchronized.
global failover	RDS-EVENT-0183	Waiting for data synchronization across global cluster members. Current lags behind primary DB cluster: *reason*.	This event is for a switchover operation (previously called "managed planned failover"). A replication lag is occurring during the synchronization phase of the global database failover.
global failover	RDS-EVENT-0184	New primary DB cluster *name* in Region *name* was successfully promoted.	This event is for a switchover operation (previously called "managed planned failover"). The volume topology of the global database is reestablished with the new primary volume.

Category	RDS event ID	Message	Notes
global failover	RDS-EVENT-0185	Global switchover to DB cluster *name* in Region *name* finished.	This event is for a switchover operation (previously called "managed planned failover"). The global database switchover is finished on the primary DB cluster. Replicas might take long to come online after the failover completes.
global failover	RDS-EVENT-0186	Global switchover to DB cluster *name* in Region *name* is cancelled.	This event is for a switchover operation (previously called "managed planned failover").
global failover	RDS-EVENT-0187	Global switchover to DB cluster *name* in Region *name* failed.	This event is for a switchover operation (previously called "managed planned failover").
global failover	RDS-EVENT-0238	Global failover to DB cluster *name* in Region *name* completed.	None
global failover	RDS-EVENT-0239	Global failover to DB cluster *name* in Region *name* failed.	None

Category	RDS event ID	Message	Notes
global failover	RDS-EVENT-0240	Started resynchronizing members of DB cluster *name* in Region *name* after global failover.	None
global failover	RDS-EVENT-0241	Finished resynchronizing members of DB cluster *name* in Region *name* after global failover.	None
global failover	RDS-EVENT-0397	Aurora finished changing the DNS name that the global writer endpoint resolves to.	None
global failover	RDS-EVENT-0519	Global database failover to DB cluster *name* in global database *name* completed . The DB cluster has no instances. Create a DB instance to access your data.	Create a DB instance to access your data.
global failover	RDS-EVENT-0423	Waiting for data synchronization with the target DB cluster. Current target DB cluster lag behind the primary DB cluster: *%s*.	This event is for a switchover operation (previously called "managed planned failover"). A replication lag is occurring during the synchronization phase of the global database failover.

Category	RDS event ID	Message	Notes
maintenance	RDS-EVENT-0156	The DB cluster has a DB engine minor version upgrade available.	None
maintenance	RDS-EVENT-0173	Database cluster engine version has been upgraded.	Patching of the DB cluster has completed.
maintenance	RDS-EVENT-0174	Database cluster is in a state that cannot be upgraded.	None
maintenance	RDS-EVENT-0176	Database cluster engine major version has been upgraded.	None
maintenance	RDS-EVENT-0177	Database cluster upgrade is in progress.	None
maintenance	RDS-EVENT-0286	Database cluster engine *version_number* version upgrade started. Cluster remains online.	None
maintenance	RDS-EVENT-0287	Operating system upgrade requirement detected.	None
maintenance	RDS-EVENT-0288	Cluster operating system upgrade starting.	None
maintenance	RDS-EVENT-0289	Cluster operating system upgrade completed.	None
maintenance	RDS-EVENT-0290	Database cluster has been patched: source version *version_number* => *new_version_number* .	None

Category	RDS event ID	Message	Notes
maintenance	RDS-EVENT-0363	Upgrade preparation in progress: *cluster_name*	Upgrade prechecks have started for the DB cluster.
maintenance	RDS-EVENT-0388	Starting offline patches to DB instances in partition *name*/*name* for DB cluster *name*: *partition_n* .	Starting the operating system upgrades for the DB instances in the DB cluster.
maintenance	RDS-EVENT-0389	We were unable to upgrade your DB cluster operating system. You can wait for the next maintenance window, or you can upgrade your DB cluster operating system manually.	None
maintenance	RDS-EVENT-0518	The engine version of DB cluster *name* has been changed from *previous_version* to *current_version* to align with the new primary cluster *name* after a failover.	No action required. This change is automatic and keeps your global database consistent.

Category	RDS event ID	Message	Notes
maintenance	RDS-EVENT-0424	The DB cluster *name* is running version *version*, which is higher than the target upgrade version *version* for the global cluster. We don't recommend having a secondary cluster on a higher version than the global cluster, as it can cause issues during failover or switchover. Consider upgrading your global cluster to match.	None
notification	RDS-EVENT-0076	Failed to migrate from *name* to *name*. Reason: *reason*.	Migration to an Aurora DB cluster failed.
notification	RDS-EVENT-0077	Failed to convert *name*.*name* to InnoDB. Reason: *reason*.	An attempt to convert a table from the source database to InnoDB failed during the migration to an Aurora DB cluster.
notification	RDS-EVENT-0085	Unable to upgrade DB cluster *name* because the instance *name* has a status of *name*. Resolve the issue or delete the instance and try again.	An error occurred while attempting to patch the Aurora DB cluster. Check your instance status, resolve the issue, and try again. For more informati on see Maintaining an Amazon Aurora DB cluster.

Category	RDS event ID	Message	Notes
notification	RDS-EVENT-0141	Scaling DB cluster from *units* to *units* for this reason: *reason*.	Scaling initiated for the Aurora Serverless DB cluster.
notification	RDS-EVENT-0142	The DB cluster has scaled from *units* to *units*.	Scaling completed for the Aurora Serverless DB cluster.
notification	RDS-EVENT-0144	The DB cluster is being paused.	An automatic pause was initiated for the Aurora Serverless DB cluster.
notification	RDS-EVENT-0145	The DB cluster is paused.	The Aurora Serverless DB cluster has been paused.
notification	RDS-EVENT-0146	Pause was canceled for the DB cluster.	The pause was canceled for the Aurora Serverless DB cluster.
notification	RDS-EVENT-0147	The DB cluster is being resumed.	A resume operation was initiated for the Aurora Serverless DB cluster.
notification	RDS-EVENT-0148	The DB cluster is resumed.	The resume operation completed for the Aurora Serverless DB cluster.
notification	RDS-EVENT-0149	The DB cluster has scaled from *units* to *units*, but scaling wasn't seamless for this reason: *reason*.	Seamless scaling completed with the force option for the Aurora Serverless DB cluster. Connections might have been interrupted as required.
notification	RDS-EVENT-0150	DB cluster stopped.	None

Category	RDS event ID	Message	Notes
notification	RDS-EVENT-0151	DB cluster started.	None
notification	RDS-EVENT-0152	DB cluster stop failed.	None
notification	RDS-EVENT-0153	DB cluster is being started due to it exceeding the maximum allowed time being stopped.	None
notification	RDS-EVENT-0172	Renamed cluster from *name* to *name*.	None
notification	RDS-EVENT-0234	Export task failed.	The DB cluster export task failed.
notification	RDS-EVENT-0235	Export task canceled.	The DB cluster export task was canceled.
notification	RDS-EVENT-0236	Export task completed.	The DB cluster export task completed.
notification	RDS-EVENT-0386	DB instances in DB cluster *name* have been partitioned: *list_of_partitions* . DB cluster is online.	The operating system upgrades for the DB instances in the DB cluster were successful.
notification	RDS-EVENT-0426	RDS can't configure the DB cluster *name* as a replication source because of idle or long-running transactions. Wait for the transactions to complete or cancel them, and try again.	None
notification	RDS-EVENT-0512	Volume replacement for DB cluster *name* started.	None

Category	RDS event ID	Message	Notes
notification	RDS-EVENT-0513	Volume replacement for DB cluster *name* completed.	None
maintenance, serverless	RDS-EVENT-0521	DB cluster serverless platform update starting.	None
maintenance, serverless	RDS-EVENT-0522	DB cluster serverles s platform update completed. Database cluster is online.	None

DB cluster snapshot events

The following table shows the event category and a list of events when a DB cluster snapshot is the source type.

Category	RDS event ID	Message	Notes
backup	RDS-EVENT-0074	Creating manual cluster snapshot.	None
backup	RDS-EVENT-0075	Manual cluster snapshot created.	None
notification	RDS-EVENT-0162	The cluster snapshot export task failed.	None
notification	RDS-EVENT-0163	The cluster snapshot export task was canceled.	None
notification	RDS-EVENT-0164	The cluster snapshot export task completed.	None
backup	RDS-EVENT-0168	Creating automated cluster snapshot.	None

Category	RDS event ID	Message	Notes
backup	RDS-EVENT-0169	Automated cluster snapshot created.	None
failure	RDS-EVENT-0489	Export task *name*: Table extraction failed for table *name* due to *message*.	This event is not supported by faster export.
notification	RDS-EVENT-0491	Export task *name*: Table *name* will be exported in a slower single-threaded mode. Please expect a delay in export completio n.	This event is not supported by faster export.
notification	RDS-EVENT-0492	Export task *name*: Table *name* is in progress, and the exported size is *number* GB.	This event will only be sent for tables taking more than 1 hour to complete. This event is not supported by faster export.
notification	RDS-EVENT-0493	Export task *name* is at *name* stage.	None
		Export task *name*: Export progress is at *number*% with *number* table(s) in-progress and *number* table(s) finished. The total size of finished tables is *number* GB.	This event is not supported by faster export.

DB instance events

The following table shows the event category and a list of events when a DB instance is the source type.

Category	RDS event ID	Message	Notes
availability	RDS-EVENT-0004	DB instance shutdown.	None
availability	RDS-EVENT-0006	DB instance restarted.	None
availability	RDS-EVENT-0022	Error restarting mysql: *message*.	An error has occurred while restarting Aurora MySQL or RDS for MariaDB.
availability	RDS-EVENT-0419	Amazon RDS has been unable to access the KMS encryption key for database instance *name*. This database will be placed into an inaccessi ble state. Please refer to the troubleshooting section in the Amazon RDS documentation for further details.	None
backtrack	RDS-EVENT-0131	The actual Backtrack window is smaller than the target Backtrack window you specified. Consider reducing the number of hours in your target Backtrack window.	For more information about backtracking, see Backtracking an Aurora DB cluster.
backtrack	RDS-EVENT-0132	The actual Backtrack window is the same as the target Backtrack window.	None
configuration change	RDS-EVENT-0011	Updated to use DBParamet erGroup *name*.	None

Category	RDS event ID	Message	Notes
configuration change	RDS-EVENT-0012	Applying modification to database instance class.	None
configuration change	RDS-EVENT-0014	Finished applying modification to DB instance class.	None
configuration change	RDS-EVENT-0017	Finished applying modification to allocated storage.	None
configuration change	RDS-EVENT-0025	Finished applying modification to convert to a Multi-AZ DB instance.	None
configuration change	RDS-EVENT-0029	Finished applying modification to convert to a standard (Single-AZ) DB instance.	None
configuration change	RDS-EVENT-0033	There are *number* users matching the master username; only resetting the one not tied to a specific host.	None
configuration change	RDS-EVENT-0067	Unable to reset your password. Error informati on: *message*.	None
configuration change	RDS-EVENT-0078	Monitoring Interval changed to *number*.	The Enhanced Monitorin g configuration has been changed.
configuration change	RDS-EVENT-0092	Finished updating DB parameter group.	None

Category	RDS event ID	Message	Notes
creation	RDS-EVENT-0005	DB instance created.	None
deletion	RDS-EVENT-0003	DB instance deleted.	None
failure	RDS-EVENT-0035	Database instance put into *state*. *message*.	The DB instance has invalid parameters. For example, if the DB instance could not start because a memory-related parameter is set too high for this instance class, your action would be to modify the memory parameter and reboot the DB instance.
failure	RDS-EVENT-0036	Database instance in *state*. *message*.	The DB instance is in an incompatible network. Some of the specified subnet IDs are invalid or do not exist.
failure	RDS-EVENT-0079	Amazon RDS has been unable to create credentials for enhanced monitoring and this feature has been disabled. This is likely due to the rds-monitoring-role not being present and configured correctly in your account. Please refer to the troubleshooting section in the Amazon RDS documentation for further details.	Enhanced Monitoring can't be enabled without the Enhanced Monitoring IAM role. For information about creating the IAM role, see To create an IAM role for Amazon RDS enhanced monitoring.

Category	RDS event ID	Message	Notes
failure	RDS-EVENT-0080	Amazon RDS has been unable to configure enhanced monitoring on your instance: *name* and this feature has been disabled. This is likely due to the rds-monitoring-rol e not being present and configured correctly in your account. Please refer to the troubleshooting section in the Amazon RDS documentation for further details.	Enhanced Monitoring was disabled because an error occurred during the configuration change. It is likely that the Enhanced Monitoring IAM role is configured incorrectly. For information about creating the enhanced monitoring IAM role, see To create an IAM role for Amazon RDS enhanced monitoring.
failure	RDS-EVENT-0082	Amazon RDS has been unable to create credentia ls to access your Amazon S3 Bucket for your DB instance *name*. This is due to the S3 snapshot ingestion IAM role not being configured correctly in your account or the specified Amazon S3 bucket cannot be found. Please refer to the troubleshooting section in the Amazon RDS documentation for further details.	Aurora was unable to copy backup data from an Amazon S3 bucket. It is likely that the permissio ns for Aurora to access the Amazon S3 bucket are configured incorrectly. For more information, see Physical migration from MySQL by using Percona XtraBackup and Amazon S3 .

Category	RDS event ID	Message	Notes
failure	RDS-EVENT-0353	The DB instance can't be created because of insufficient resource limits. *message*.	The *message* includes details about the failure.
failure	RDS-EVENT-0418	Amazon RDS is unable to access the KMS encryption key for database instance *name*. This is likely due to the key being disabled or Amazon RDS being unable to access it. If this continues the database will be placed into an inaccessible state. Please refer to the troublesh ooting section in the Amazon RDS documenta tion for further details.	None
failure	RDS-EVENT-0420	Amazon RDS can now successfully access the KMS encryption key for database instance *name*.	None

Category	RDS event ID	Message	Notes
low storage	RDS-EVENT-0007	Allocated storage has been exhausted. Allocate additional storage to resolve.	The allocated storage for the DB instance has been consumed. To resolve this issue, allocate additional storage for the DB instance. For more information, see the RDS FAQ. You can monitor the storage space for a DB instance using the **Free Storage Space** metric.
low storage	RDS-EVENT-0089	The free storage capacity for DB instance: *name* is low at *percentage* of the provisioned storage [Provisioned Storage: *size*, Free Storage: *size*]. You may want to increase the provisioned storage to address this issue.	The DB instance has consumed more than 90% of its allocated storage. You can monitor the storage space for a DB instance using the **Free Storage Space** metric.
low storage	RDS-EVENT-0227	Your Aurora cluster's storage is dangerously low with only *amount* terabytes remaining. Please take measures to reduce the storage load on your cluster.	The Aurora storage subsystem is running low on space.
maintenance	RDS-EVENT-0026	Applying off-line patches to DB instance.	Offline maintenance of the DB instance is taking place. The DB instance is currently unavailable.

Category	RDS event ID	Message	Notes
maintenance	RDS-EVENT-0027	Finished applying off-line patches to DB instance.	Offline maintenance of the DB instance is complete. The DB instance is now available.
maintenance	RDS-EVENT-0047	Database instance patched.	None
maintenance	RDS-EVENT-0155	The DB instance has a DB engine minor version upgrade available.	None
maintenance	RDS-EVENT-0178	Database instance upgrade is in progress.	None
maintenance	RDS-EVENT-0422	RDS will replace the host of DB instance *name* due to a pending maintenance action.	None
notification	RDS-EVENT-0044	*message*	This is an operator-issued notification. For more information, see the event message.
notification	RDS-EVENT-0048	Delaying database engine upgrade since this instance has read replicas that need to be upgraded first.	Patching of the DB instance has been delayed.
notification	RDS-EVENT-0087	DB instance stopped.	None
notification	RDS-EVENT-0088	DB instance started.	None

Category	RDS event ID	Message	Notes
notification	RDS-EVENT-0365	Timezone files were updated. Restart your RDS instance for the changes to take effect.	None
notification, serverless	RDS-EVENT-0370	Initiated pause for the DB instance.	A new attempt to pause an idle Aurora serverless DB instance was started.
notification, serverless	RDS-EVENT-0371	Pause was canceled for the DB instance.	An attempt to pause an idle Aurora serverless DB instance was unsuccessful, due to workload.
notification, serverless	RDS-EVENT-0372	Successfully paused the DB instance.	The Aurora serverless DB instance was paused.
notification, serverless	RDS-EVENT-0373	Initiated resume for the DB instance.	The Aurora serverles s DB instance started resuming, due to new workload or administrative or maintenance activity.
notification, serverless	RDS-EVENT-0374	Successfully resumed the DB instance.	The Aurora serverless DB instance resumed.
notification	RDS-EVENT-0385	Cluster topology is updated.	There are DNS changes to the DB cluster for the DB instance. This includes when new DB instances are added or deleted, or there's a failover.

Category	RDS event ID	Message	Notes
notification, global database	RDS-EVENT-0390	Attempt to block writes for DB cluster *cluster_id* in Region *region_id* succeeded.	Aurora began blocking writes at the storage layer in preparation for switchover or failover of an Aurora global database.
notification, global database	RDS-EVENT-0391	Attempt to block writes for DB cluster *cluster_id* in Region *region_id* timed out.	Aurora wasn't able to block writes at the storage layer in preparation for switchover or failover of an Aurora global database. The switchover or failover will proceed but you might need to recover recently written data from the snapshot of the original primary cluster.
read replica	RDS-EVENT-0045	Replication has stopped.	This message appears when there is an error during replication. To determine the type of error, see Troubleshooting a MySQL read replica problem.

Category	RDS event ID	Message	Notes
read replica	RDS-EVENT-0046	Replication for the Read Replica resumed.	This message appears when you first create a read replica, or as a monitoring message confirming that replication is functioning properly. If this message follows an `RDS-EVENT-0045` notification, then replication has resumed following an error or after replication was stopped.
read replica	RDS-EVENT-0057	Replication streaming has been terminated.	None
recovery	RDS-EVENT-0020	Recovery of the DB instance has started. Recovery time will vary with the amount of data to be recovered.	None
recovery	RDS-EVENT-0021	Recovery of the DB instance is complete.	None
recovery	RDS-EVENT-0023	Emergent Snapshot Request: *`message`*.	A manual backup has been requested but Amazon RDS is currently in the process of creating a DB snapshot. Submit the request again after Amazon RDS has completed the DB snapshot.

Category	RDS event ID	Message	Notes
recovery	RDS-EVENT-0052	Multi-AZ instance recovery started.	Recovery time will vary with the amount of data to be recovered.
recovery	RDS-EVENT-0053	Multi-AZ instance recovery completed. Pending failover or activation.	This message indicates that Amazon RDS has prepared your DB instance to initiate a failover to the secondary instance if necessary.
recovery	RDS-EVENT-0361	Recovery of standby DB instance has started.	The standby DB instance is rebuilt during the recovery process. Database performance is impacted during the recovery process.
recovery	RDS-EVENT-0362	Recovery of standby DB instance has completed.	The standby DB instance is rebuilt during the recovery process. Database performance is impacted during the recovery process.
restoration	RDS-EVENT-0019	Restored from DB instance *name* to *name*.	The DB instance has been restored from a point-in-time backup.

Category	RDS event ID	Message	Notes
security patching	RDS-EVENT-0230	A system update is available for your DB instance. For information about applying updates, see 'Maintaining a DB instance' in the RDS User Guide.	A new, minor version, operating system patch is available for your DB instance. For information about applying updates, see Operating system updates for Aurora DB clusters.
maintenance	RDS-EVENT-0425	Amazon RDS can't perform the OS upgrade because there are no available IP addresses in the specified subnets. Choose subnets with available IP addresses and try again.	None
maintenance	RDS-EVENT-0429	Amazon RDS can't perform the OS upgrade because of insufficient capacity available for the *type* instance type in the *zone* Availability Zone	None

Category	RDS event ID	Message	Notes
maintenance	RDS-EVENT-0501	Amazon RDS DB instance's server certificate requires rotation through a pending maintenance action.	DB instance's server certificate requires rotation through a pending maintenance action. Amazon RDS reboots your database during this maintenance to complete the certificate rotation. To schedule this maintenance, go to the **Maintenance & backups** tab and choose **Apply now** or **Schedule for next maintenance window**. If the change is not scheduled, Amazon RDS automatically applies it in your mainteance window on the auto apply date shown in your maintenance action.
maintenance	RDS-EVENT-0502	Amazon RDS has scheduled a server certificate rotation for DB instance during the next maintenance window. This maintenance will require a database reboot.	None

Category	RDS event ID	Message	Notes
maintenance, serverless	RDS-EVENT-0523	Amazon RDS can't perform the Serverless platform update because there are no available IP addresses in the specified subnets. Choose subnets with available IP addresses and try again.	None
maintenance, serverless	RDS-EVENT-0524	Amazon RDS can't perform the Serverless platform update because of insufficient capacity available.	None
maintenance, serverless	RDS-EVENT-0525	The Serverless platform update failed for the DB instance *name*.	None
notification	RDS-EVENT-0610	The log file *log_name* will be deleted since it is past the log retention period and may not be uploaded to CloudWatch Logs.	None

Category	RDS event ID	Message	Notes
notification	RDS-EVENT-0611	Due to storage space constraints, the log file *log_name* will be deleted and will not be uploaded to CloudWatch Logs.	The log records in this file that weren't uploaded aren't available in CloudWatch Logs. The storage available for log files depends on the DB instance class. To reduce the log volume, adjust your logging settings. For more information, see Monitoring Amazon Aurora log files.

DB parameter group events

The following table shows the event category and a list of events when a DB parameter group is the source type.

Category	RDS event ID	Message	Notes
configuration change	RDS-EVENT-0037	Updated parameter *name* to *value* with apply method *method*.	None

DB security group events

The following table shows the event category and a list of events when a DB security group is the source type.

> **Note**
>
> DB security groups are resources for EC2-Classic. EC2-Classic was retired on August 15, 2022. If you haven't migrated from EC2-Classic to a VPC, we recommend that you migrate as soon as possible. For more information, see Migrate from EC2-Classic to a VPC in the

Amazon EC2 User Guide and the blog EC2-Classic Networking is Retiring – Here's How to Prepare.

Category	RDS event ID	Message	Notes
configuration change	RDS-EVENT-0038	Applied change to security group.	None
failure	RDS-EVENT-0039	Revoking authorization as *user*.	The security group owned by *user* doesn't exist. The authorization for the security group has been revoked because it is invalid.

DB shard group events

The following table shows the event category and a list of events when a DB shard group is the source type.

Category	RDS event ID	Message	Notes
failure	RDS-EVENT-0324	Data load job failed.	The data loading job failed for the reason that appears in the error message.
maintenance	RDS-EVENT-0302	Your action is required to finalize a pending split shard job *job_ID* for subcluster ID *number* in DB shard group *name*. To complete the operation invoke the SQL:	None

Category	RDS event ID	Message	Notes
		`SELECT rds_aurora.limitless_finalize_split_shard( job_ID);`	
maintenance	RDS-EVENT-0303	Finalize for the split shard job *job_ID* has started for subcluster ID *number* in DB shard group *name*.	None
maintenance	RDS-EVENT-0304	Split shard job *job_ID* has completed successfully for subcluster ID *number* in DB shard group *name*. A new shard with subcluster ID *number* was added to DB shard group *name*.	None
maintenance	RDS-EVENT-0305	Split shard job *job_ID* has failed for subcluster ID *number* in DB shard group *name*.	None
maintenance	RDS-EVENT-0366	Split shard job *job_ID* has started for subcluster ID *number* in DB shard group *name*.	None
maintenance	RDS-EVENT-0367	Add router job *job_ID* has started in DB shard group *name*.	None

Category	RDS event ID	Message	Notes
maintenance	RDS-EVENT-0368	Add router job *job_ID* has completed successfully. A new router with subcluste r ID *number* was added to DB shard group *name*.	None
maintenance	RDS-EVENT-0369	Add router job *job_ID* has failed in DB shard group *name*.	None
maintenance	RDS-EVENT-0394	Add router job *job_ID* has been canceled in DB shard group *name*.	None
maintenance	RDS-EVENT-0395	Split shard job *job_ID* has been canceled in DB shard group *name*.	None
notification	RDS-EVENT-0321	Initializing infrastructure for the Data Load job.	None
notification	RDS-EVENT-0322	Data load job is in progress.	None
notification	RDS-EVENT-0323	Data load job completed successfully.	None
notification	RDS-EVENT-0325	Canceling Data load job as per customer's request.	None
notification	RDS-EVENT-0326	Data load job canceled.	None

RDS Proxy events

The following table shows the event category and a list of events when an RDS Proxy is the source type.

Category	RDS event ID	Message	Notes
configuration change	RDS-EVENT-0204	RDS modified DB proxy *name*.	None
configuration change	RDS-EVENT-0207	RDS modified the end point of the DB proxy *name*.	None
configuration change	RDS-EVENT-0213	RDS detected the addition of the DB instance and automatically added it to the target group of the DB proxy *name*.	None
configuration change	RDS-EVENT-0214	RDS detected deletion of DB instance *name* and automatically removed it from target group *name* of DB proxy *name*.	None
configuration change	RDS-EVENT-0215	RDS detected deletion of DB cluster *name* and automatically removed it from target group *name* of DB proxy *name*.	None
creation	RDS-EVENT-0203	RDS created DB proxy *name*.	None
creation	RDS-EVENT-0206	RDS created endpoint *name* for DB proxy *name*.	None
deletion	RDS-EVENT-0205	RDS deleted DB proxy *name*.	None
deletion	RDS-EVENT-0208	RDS deleted endpoint *name* for DB proxy *name*.	None

Category	RDS event ID	Message	Notes
failure	RDS-EVENT-0243	RDS failed to provision capacity for proxy *name* because there aren't enough IP addresses available in your subnets: *name*. To fix the issue, make sure that your subnets have the minimum number of unused IP addresses as recommend ed in the RDS Proxy documentation.	To determine the recommended number for your instance class, see Planning for IP address capacity.
failure	RDS-EVENT-0275	RDS throttled some connections to DB proxy *name*. The number of simultaneous connection requests from the client to the proxy has exceeded the limit.	None

Blue/green deployment events

The following table shows the event category and a list of events when a blue/green deployment is the source type.

For more information about blue/green deployments, see Using Amazon Aurora Blue/Green Deployments for database updates.

Category	Amazon RDS event ID	Message	Notes
creation	RDS-EVENT-0244	Blue/green deployment tasks completed. You can make more modifications	None

Category	Amazon RDS event ID	Message	Notes
		to the green environment databases or switch over the deployment.	
failure	RDS-EVENT-0245	Creation of blue/green deployment failed because *reason*.	None
deletion	RDS-EVENT-0246	Blue/green deployment deleted.	None
notification	RDS-EVENT-0247	Switchover from *blue* to *green* started.	None
notification	RDS-EVENT-0248	Switchover completed on blue/green deployment.	None
failure	RDS-EVENT-0249	Switchover canceled on blue/green deployment.	None
notification	RDS-EVENT-0259	Switchover from DB cluster *blue* to *green* started.	None
notification	RDS-EVENT-0260	Switchover from DB cluster *blue* to *green* completed . Renamed *blue* to *blue-old* and *green* to *blue*.	None
failure	RDS-EVENT-0261	Switchover from DB cluster *blue* to *green* was canceled due to *reason*.	None

Category	Amazon RDS event ID	Message	Notes
notification	RDS-EVENT-0311	Sequence sync for switchover of DB cluster *blue* to *green* has initiated. Switchover when using sequences may lead to extended downtime.	None
notification	RDS-EVENT-0312	Sequence sync for switchover of DB cluster *blue* to *green* has completed.	None
failure	RDS-EVENT-0314	Sequence sync for switchover of DB cluster *blue* to *green* was cancelled because sequences failed to sync.	None
notification	RDS-EVENT-0409	*message*	None

Monitoring Amazon Aurora log files

Every RDS database engine generates logs that you can access for auditing and troubleshooting. The type of logs depends on your database engine.

You can access database logs for DB instances using the Amazon Web Services Management Console, the Amazon Command Line Interface (Amazon CLI), or the Amazon RDS API. You can't view, watch, or download transaction logs.

> **Note**
>
> In some cases, logs contain hidden data. Therefore, the Amazon Web Services Management Console might show content in a log file, but the log file might be empty when you download it.

Topics

- Viewing and listing database log files
- Downloading a database log file
- Watching a database log file
- Publishing database logs to Amazon CloudWatch Logs
- Reading log file contents using REST
- AuroraMySQL database log files
- Aurora PostgreSQL database log files

Viewing and listing database log files

You can view database log files for your Amazon Aurora DB engine by using the Amazon Web Services Management Console. You can list what log files are available for download or monitoring by using the Amazon CLI or Amazon RDS API.


> **Note**
>
> You can't view the log files for Aurora Serverless v1 DB clusters in the RDS console. However, you can view them in the Amazon CloudWatch console at https://console.amazonaws.cn/cloudwatch/.

Console

To view a database log file

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the name of the DB instance that has the log file that you want to view.
4. Choose the **Logs & events** tab.
5. Scroll down to the **Logs** section.
6. (Optional) Enter a search term to filter your results.

   The following example lists logs filtered by the text **`error`**.

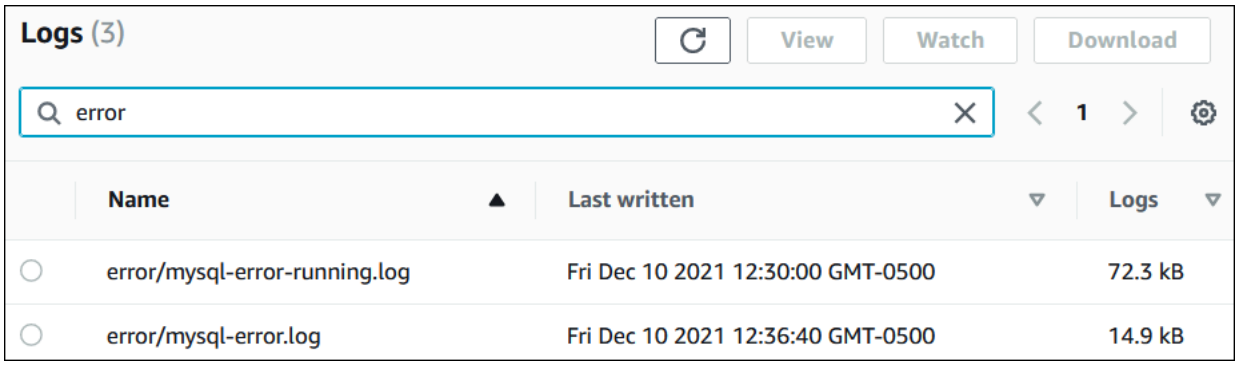

7. Choose the log that you want to view, and then choose **View**.

Amazon CLI

To list the available database log files for a DB instance, use the Amazon CLI `describe-db-log-files` command.

The following example returns a list of log files for a DB instance named `my-db-instance`.

Example

```
aws rds describe-db-log-files --db-instance-identifier my-db-instance
```

RDS API

To list the available database log files for a DB instance, use the Amazon RDS API `DescribeDBLogFiles` action.

Downloading a database log file

You can use the Amazon Web Services Management Console, Amazon CLI, or API to download a database log file.

Console

To download a database log file

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the name of the DB instance that has the log file that you want to view.
4. Choose the **Logs & events** tab.
5. Scroll down to the **Logs** section.
6. In the **Logs** section, choose the button next to the log that you want to download, and then choose **Download**.
7. Open the context (right-click) menu for the link provided, and then choose **Save Link As**. Enter the location where you want the log file to be saved, and then choose **Save**.



Amazon CLI

To download a database log file, use the Amazon CLI command `download-db-log-file-portion`. By default, this command downloads only the latest portion of a log file. However, you can download an entire file by specifying the parameter `--starting-token 0`.

The following example shows how to download the entire contents of a log file called *log/ERROR.4* and store it in a local file called *errorlog.txt*.

Example

For Linux, macOS, or Unix:

```
aws rds download-db-log-file-portion \
    --db-instance-identifier myexampledb \
    --starting-token 0 --output text \
    --log-file-name log/ERROR.4 > errorlog.txt
```

For Windows:

```
aws rds download-db-log-file-portion ^
    --db-instance-identifier myexampledb ^
    --starting-token 0 --output text ^
    --log-file-name log/ERROR.4 > errorlog.txt
```

RDS API


To download a database log file, use the Amazon RDS API `DownloadDBLogFilePortion` action.

Watching a database log file


Watching a database log file is equivalent to tailing the file on a UNIX or Linux system. You can watch a log file by using the Amazon Web Services Management Console. RDS refreshes the tail of the log every 5 seconds.

To watch a database log file


1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the name of the DB instance that has the log file that you want to view.
4. Choose the **Logs & events** tab.

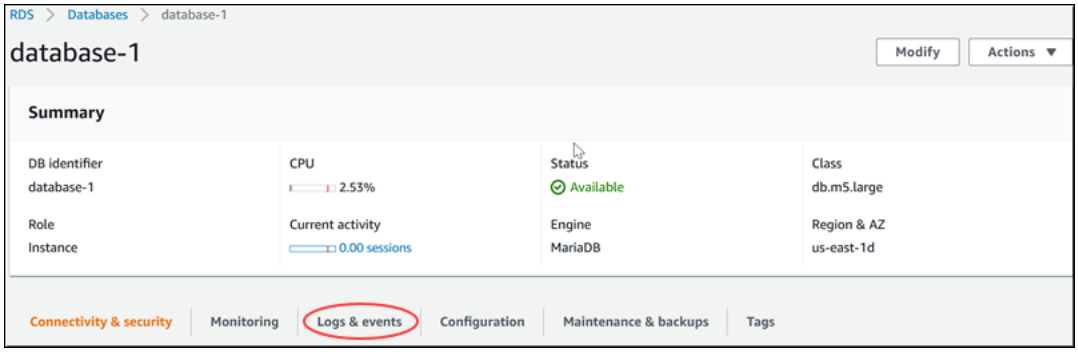

5. In the **Logs** section, choose a log file, and then choose **Watch**.

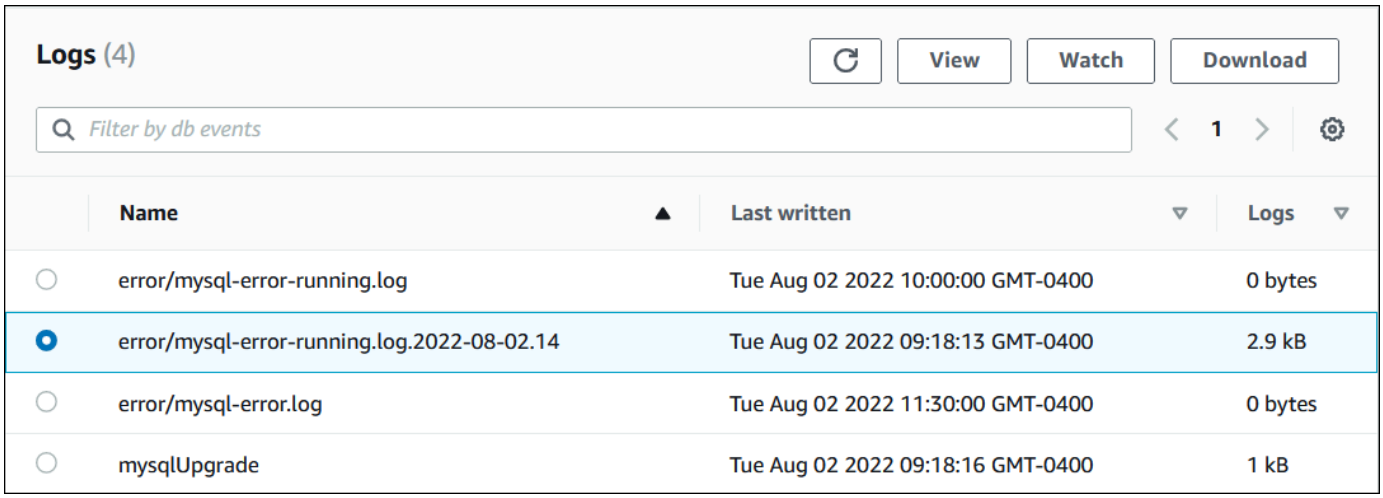

RDS shows the tail of the log, as in the following MySQL example.

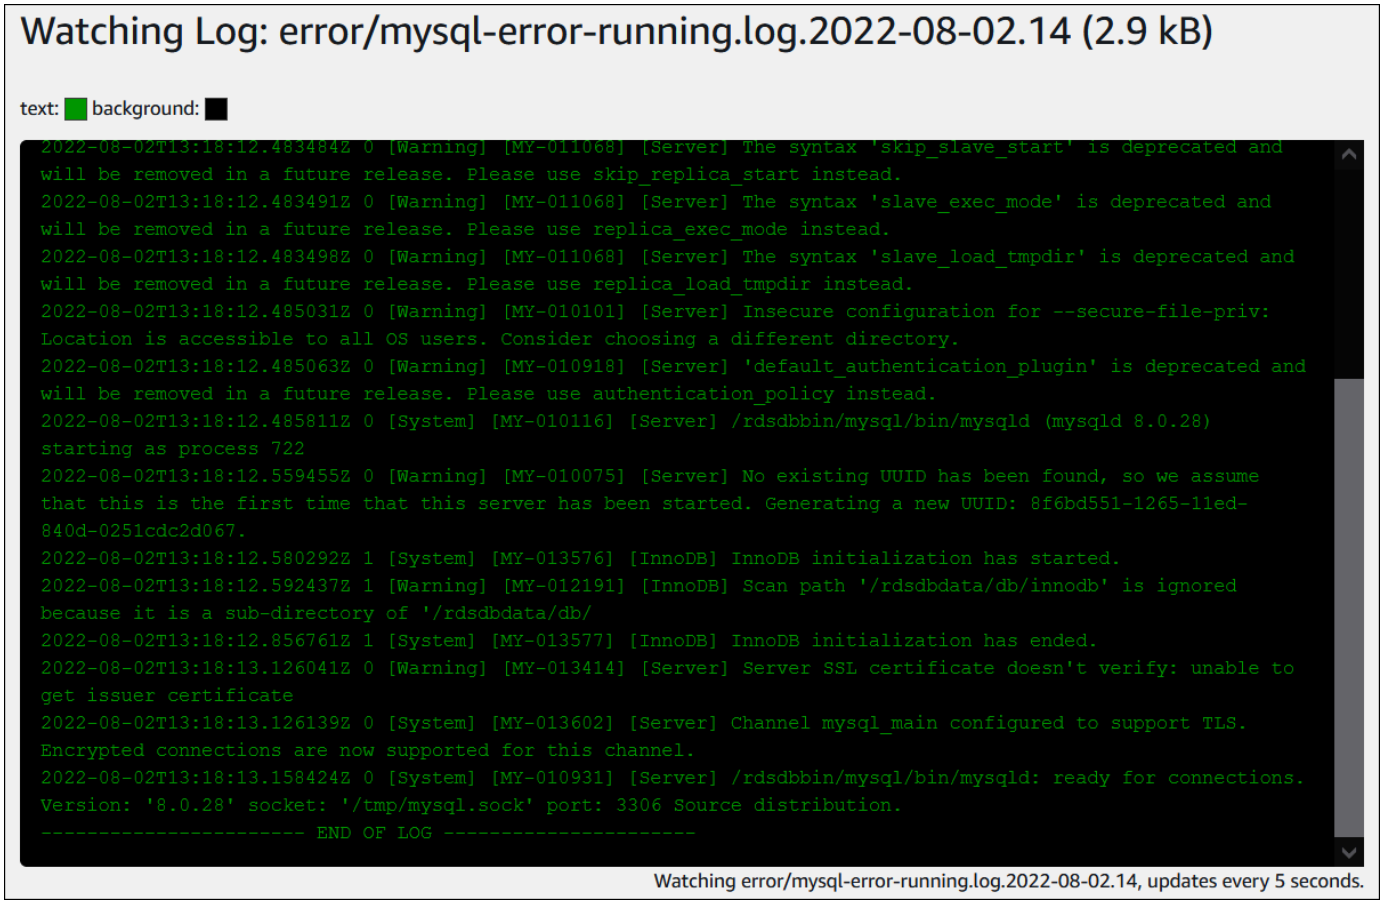

Publishing database logs to Amazon CloudWatch Logs

In an on-premises database, the database logs reside on the file system. Amazon RDS doesn't provide host access to the database logs on the file system of your DB cluster. For this reason, Amazon RDS lets you export database logs to Amazon CloudWatch Logs. With CloudWatch Logs, you can perform real-time analysis of the log data. You can also store the data in highly durable storage and manage the data with the CloudWatch Logs Agent.

Topics

- Overview of RDS integration with CloudWatch Logs
- Deciding which logs to publish to CloudWatch Logs
- Specifying the logs to publish to CloudWatch Logs
- Searching and filtering your logs in CloudWatch Logs

Overview of RDS integration with CloudWatch Logs

In CloudWatch Logs, a *log stream* is a sequence of log events that share the same source. Each separate source of logs in CloudWatch Logs makes up a separate log stream. A *log group* is a group of log streams that share the same retention, monitoring, and access control settings.

Amazon Aurora continuously streams your DB cluster log records to a log group. For example, you have a log group `/aws/rds/cluster/`*`cluster_name`*`/`*`log_type`* for each type of log that you publish. This log group is in the same Amazon Region as the database instance that generates the log.

Amazon retains log data published to CloudWatch Logs for an indefinite time period unless you specify a retention period. For more information, see Change log data retention in CloudWatch Logs.

Deciding which logs to publish to CloudWatch Logs

Each RDS database engine supports its own set of logs. To learn about the options for your database engine, review the following topics:

- the section called "Publishing Aurora MySQL logs to CloudWatch Logs"
- the section called "Publishing Aurora PostgreSQL logs to CloudWatch Logs"

Specifying the logs to publish to CloudWatch Logs

You specify which logs to publish in the console. Make sure that you have a service-linked role in Amazon Identity and Access Management (IAM). For more information about service-linked roles, see Using service-linked roles for Amazon Aurora.

To specify the logs to publish

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Do either of the following:
   - Choose **Create database**.
   - Choose a database from the list, and then choose **Modify**.
4. In **Logs exports**, choose which logs to publish.

The following example specifies the audit log, error logs, general log, instance log, IAM database authentication error log, and slow query log for an Aurora MySQL DB cluster.

Searching and filtering your logs in CloudWatch Logs

You can search for log entries that meet a specified criteria using the CloudWatch Logs console. You can access the logs either through the RDS console, which leads you to the CloudWatch Logs console, or from the CloudWatch Logs console directly.

To search your RDS logs using the RDS console

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose a DB cluster or a DB instance.
4. Choose **Configuration**.
5. Under **Published logs**, choose the database log that you want to view.

To search your RDS logs using the CloudWatch Logs console

1. Open the CloudWatch console at https://console.amazonaws.cn/cloudwatch/.
2. In the navigation pane, choose **Log groups**.
3. In the filter box, enter **`/aws/rds`**.
4. For **Log Groups**, choose the name of the log group containing the log stream to search.
5. For **Log Streams**, choose the name of the log stream to search.
6. Under **Log events**, enter the filter syntax to use.

For more information, see Searching and filtering log data in the *Amazon CloudWatch Logs User Guide*. For a blog tutorial explaining how to monitor RDS logs, see Build proactive database monitoring for Amazon RDS with Amazon CloudWatch Logs, Amazon Lambda, and Amazon SNS.

Reading log file contents using REST

Amazon RDS provides a REST endpoint that allows access to DB instance log files. This is useful if you need to write an application to stream Amazon RDS log file contents.

The syntax is:

```
GET /v13/downloadCompleteLogFile/DBInstanceIdentifier/LogFileName HTTP/1.1
Content-type: application/json
host: rds.region.amazonaws.com
```

The following parameters are required:

- *DBInstanceIdentifier*—the name of the DB instance that contains the log file you want to download.
- *LogFileName*—the name of the log file to be downloaded.

The response contains the contents of the requested log file, as a stream.

The following example downloads the log file named *log/ERROR.6* for the DB instance named *sample-sql* in the *us-west-2* region.

```
GET /v13/downloadCompleteLogFile/sample-sql/log/ERROR.6 HTTP/1.1
host: rds.us-west-2.amazonaws.com
X-Amz-Security-Token: AQoDYXdzEIH//////////
wEa0AIXLhngC5zp9CyB1R6abwKrXHVR5efnAVN3XvR7IwqKYalFSn6UyJuEFTft9nObglx4QJ+GXV9cpACkETq=
X-Amz-Date: 20140903T233749Z
X-Amz-Algorithm: AWS4-HMAC-SHA256
X-Amz-Credential: AKIADQKE4SARGYLE/20140903/us-west-2/rds/aws4_request
X-Amz-SignedHeaders: host
X-Amz-Content-SHA256: e3b0c44298fc1c229afbf4c8996fb92427ae41e4649b934de495991b7852b855
X-Amz-Expires: 86400
X-Amz-Signature: 353a4f14b3f250142d9afc34f9f9948154d46ce7d4ec091d0cdabbcf8b40c558
```

If you specify a nonexistent DB instance, the response consists of the following error:

- DBInstanceNotFound—*DBInstanceIdentifier* does not refer to an existing DB instance. (HTTP status code: 404)

AuroraMySQL database log files

You can monitor the Aurora MySQL logs directly through the Amazon RDS console, Amazon RDS API, Amazon CLI, or Amazon SDKs. You can also access MySQL logs by directing the logs to a database table in the main database and querying that table. You can use the mysqlbinlog utility to download a binary log.

For more information about viewing, downloading, and watching file-based database logs, see Monitoring Amazon Aurora log files.

Topics

- Overview of Aurora MySQL database logs
- Sending AuroraMySQL log output to tables
- Configuring Aurora MySQL binary logging
- Accessing MySQL binary logs

Overview of Aurora MySQL database logs

You can monitor the following types of Aurora MySQL log files:

- Error log
- Slow query log
- General log
- Audit log
- Instance log
- IAM database authentication error log

The Aurora MySQL error log is generated by default. You can generate the slow query and general logs by setting parameters in your DB parameter group.

Topics

- Aurora MySQL error logs
- Aurora MySQL slow query and general logs
- Aurora MySQL audit log

- Aurora MySQL instance log
- Log rotation and retention for Aurora MySQL
- Publishing Aurora MySQL logs to Amazon CloudWatch Logs

Aurora MySQL error logs

Aurora MySQL writes errors in the `mysql-error.log` file. Each log file has the hour it was generated (in UTC) appended to its name. The log files also have a timestamp that helps you determine when the log entries were written.

Aurora MySQL writes to the error log only on startup, shutdown, and when it encounters errors. A DB instance can go hours or days without new entries being written to the error log. If you see no recent entries, it's because the server didn't encounter an error that would result in a log entry.

By design, the error logs are filtered so that only unexpected events such as errors are shown. However, the error logs also contain some additional database information, for example query progress, which isn't shown. Therefore, even without any actual errors the size of the error logs might increase because of ongoing database activities. And while you might see a certain size in bytes or kilobytes for the error logs in the Amazon Web Services Management Console, they might have 0 bytes when you download them.

Aurora MySQL writes `mysql-error.log` to disk every 5 minutes. It appends the contents of the log to `mysql-error-running.log`.

Aurora MySQL rotates the `mysql-error-running.log` file every hour.

> **Note**
>
> The log retention period is different between Amazon RDS and Aurora.

Aurora MySQL slow query and general logs

You can write the Aurora MySQL slow query log and the general log to a file or a database table. To do so, set parameters in your DB parameter group. For information about creating and modifying a DB parameter group, see Parameter groups for Amazon Aurora. You must set these parameters before you can view the slow query log or general log in the Amazon RDS console or by using the Amazon RDS API, Amazon RDS CLI, or Amazon SDKs.

You can control Aurora MySQL logging by using the parameters in this list:

- `slow_query_log`: To create the slow query log, set to 1. The default is 0.
- `general_log`: To create the general log, set to 1. The default is 0.
- `long_query_time`: To prevent fast-running queries from being logged in the slow query log, specify a value for the shortest query runtime to be logged, in seconds. The default is 10 seconds; the minimum is 0. If log_output = FILE, you can specify a floating point value that goes to microsecond resolution. If log_output = TABLE, you must specify an integer value with second resolution. Only queries whose runtime exceeds the `long_query_time` value are logged. For example, setting `long_query_time` to 0.1 prevents any query that runs for less than 100 milliseconds from being logged.
- `log_queries_not_using_indexes`: To log all queries that do not use an index to the slow query log, set to 1. Queries that don't use an index are logged even if their runtime is less than the value of the `long_query_time` parameter. The default is 0.
- `log_output` *`option`*: You can specify one of the following options for the `log_output` parameter.
  - **TABLE** – Write general queries to the `mysql.general_log` table, and slow queries to the `mysql.slow_log` table.
  - **FILE** – Write both general and slow query logs to the file system.
  - **NONE** – Disable logging.

  For Aurora MySQL versions 2 and 3, the default for `log_output` is `FILE`.

For slow query data to appear in Amazon CloudWatch Logs, the following conditions must be met:

- CloudWatch Logs must be configured to include slow query logs.
- `slow_query_log` must be enabled.
- `log_output` must be set to `FILE`.
- The query must take longer than the time configured for `long_query_time`.

For more information about the slow query and general logs, go to the following topics in the MySQL documentation:

- The slow query log
- The general query log

Aurora MySQL audit log

Audit logging for Aurora MySQL is called Advanced Auditing. To turn on Advanced Auditing, you set certain DB cluster parameters. For more information, see Using Advanced Auditing with an Amazon Aurora MySQL DB cluster.

Aurora MySQL instance log

Aurora creates a separate log file for DB instances that have auto-pause enabled. This instance.log file records any reasons why these DB instances couldn't be paused when expected. For more information on instance log file behavior and Aurora auto-pause capability, see Monitoring Aurora serverless pause and resume activity.

Log rotation and retention for Aurora MySQL

When logging is enabled, Amazon Aurora rotates or deletes log files at regular intervals. This measure is a precaution to reduce the possibility of a large log file either blocking database use or affecting performance. Aurora MySQL handles rotation and deletion as follows:

- The Aurora MySQL error log file sizes are constrained to no more than 15 percent of the local storage for a DB instance. To maintain this threshold, logs are automatically rotated every hour. Aurora MySQL removes logs after 30 days or when 15% of disk space is reached. If the combined log file size exceeds the threshold after removing old log files, then the oldest log files are deleted until the log file size no longer exceeds the threshold.
- Aurora MySQL removes the audit, general, and slow query logs after either 24 hours or when 15% of storage has been consumed.
- When `FILE` logging is enabled, general log and slow query log files are examined every hour and log files more than 24 hours old are deleted. In some cases, the remaining combined log file size after the deletion might exceed the threshold of 15 percent of a DB instance's local space. In these cases, the oldest log files are deleted until the log file size no longer exceeds the threshold.
- When `TABLE` logging is enabled, log tables aren't rotated or deleted. Log tables are truncated when the size of all logs combined is too large. You can subscribe to the `low storage` event category to be notified when log tables should be manually rotated or deleted to free up space. For more information, see Working with Amazon RDS event notification.

  You can rotate the `mysql.general_log` table manually by calling the `mysql.rds_rotate_general_log` procedure. You can rotate the `mysql.slow_log` table by calling the `mysql.rds_rotate_slow_log` procedure.

When you rotate log tables manually, the current log table is copied to a backup log table and the entries in the current log table are removed. If the backup log table already exists, then it is deleted before the current log table is copied to the backup. You can query the backup log table if needed. The backup log table for the `mysql.general_log` table is named `mysql.general_log_backup`. The backup log table for the `mysql.slow_log` table is named `mysql.slow_log_backup`.

- The Aurora MySQL audit logs are rotated when the file size reaches 100 MB, and removed after 24 hours.
- Amazon RDS rotates IAM database authentication error log files larger than 10 MB. Amazon RDS removes IAM database authentication error log files that are older than five days or larger than 100 MB.

To work with the logs from the Amazon RDS console, Amazon RDS API, Amazon RDS CLI, or Amazon SDKs, set the `log_output` parameter to FILE. Like the Aurora MySQL error log, these log files are rotated hourly. The log files that were generated during the previous 24 hours are retained. Note that the retention period is different between Amazon RDS and Aurora.

Publishing Aurora MySQL logs to Amazon CloudWatch Logs

You can configure your Aurora MySQL DB cluster to publish log data to a log group in Amazon CloudWatch Logs. With CloudWatch Logs, you can perform real-time analysis of the log data, and use CloudWatch to create alarms and view metrics. You can use CloudWatch Logs to store your log records in highly durable storage. For more information, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.

Sending AuroraMySQL log output to tables

You can direct the general and slow query logs to tables on the DB instance by creating a DB parameter group and setting the `log_output` server parameter to `TABLE`. General queries are then logged to the `mysql.general_log` table, and slow queries are logged to the `mysql.slow_log` table. You can query the tables to access the log information. Enabling this logging increases the amount of data written to the database, which can degrade performance.

Both the general log and the slow query logs are disabled by default. In order to enable logging to tables, you must also set the `general_log` and `slow_query_log` server parameters to 1.

Log tables keep growing until the respective logging activities are turned off by resetting the appropriate parameter to `0`. A large amount of data often accumulates over time, which can use

up a considerable percentage of your allocated storage space. Amazon Aurora doesn't allow you to truncate the log tables, but you can move their contents. Rotating a table saves its contents to a backup table and then creates a new empty log table. You can manually rotate the log tables with the following command line procedures, where the command prompt is indicated by PROMPT>:

```
PROMPT> CALL mysql.rds_rotate_slow_log;
PROMPT> CALL mysql.rds_rotate_general_log;
```

To completely remove the old data and reclaim the disk space, call the appropriate procedure twice in succession.

Configuring Aurora MySQL binary logging

The *binary log* is a set of log files that contain information about data modifications made to an Aurora MySQL DB cluster. The binary log contains information such as the following:

- Events that describe database changes such as table creation or row modifications
- Information about the duration of each statement that updated data
- Events for statements that could have updated data but didn't

The binary log records statements that are sent during replication. It is also required for some recovery operations. For more information, see The Binary Log in the MySQL documentation.

Binary logs are accessible only from the primary DB instance, not from the replicas.

MySQL on Amazon Aurora supports the *row-based*, *statement-based*, and *mixed* binary logging formats. We recommend mixed unless you need a specific binlog format. For details on the different Aurora MySQL binary log formats, see Binary Logging Formats in the MySQL documentation.

If you plan to use replication, the binary logging format is important because it determines the record of data changes that is recorded in the source and sent to the replication targets. For information about the advantages and disadvantages of different binary logging formats for replication, see Advantages and Disadvantages of Statement-Based and Row-Based Replication in the MySQL documentation.

Important

With MySQL 8.0.34, MySQL deprecated the `binlog_format` parameter. In later MySQL versions, MySQL plans to remove the parameter and only support row-based replication. As a result, we recommend using row-based logging for new MySQL replication setups. For more information, see binlog_format in the MySQL documentation.
MySQL versions 8.0 and 8.4 accept the parameter `binlog_format`. When using this parameter, MySQL issues a deprecation warning. In a future major release, MySQL will remove the parameter `binlog_format`.
Statement-based replication can cause inconsistencies between the source DB cluster and a read replica. For more information, see Determination of Safe and Unsafe Statements in Binary Logging in the MySQL documentation.
Enabling binary logging increases the number of write disk I/O operations to the DB cluster. You can monitor IOPS usage with the `VolumeWriteIOPs` CloudWatch metric.

To set the MySQL binary logging format

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. Choose the DB cluster parameter group, associated with the DB cluster, that you want to modify.

   You can't modify a default parameter group. If the DB cluster is using a default parameter group, create a new parameter group and associate it with the DB cluster.

   For more information on parameter groups, see Parameter groups for Amazon Aurora.
4. From **Actions**, choose **Edit**.
5. Set the `binlog_format` parameter to the binary logging format of your choice (`ROW`, `STATEMENT`, or `MIXED`). You can also use the value `OFF` to turn off binary logging.

   Note

   Setting `binlog_format` to `OFF` in the DB cluster parameter group disables the `log_bin` session variable. This disables binary logging on the Aurora MySQL DB

cluster, which in turn resets the `binlog_format` session variable to the default value of `ROW` in the database.

6. Choose **Save changes** to save the updates to the DB cluster parameter group.

After you perform these steps, you must reboot the writer instance in the DB cluster for your changes to apply. In Aurora MySQL version 2.09 and lower, when you reboot the writer instance, all of the reader instances in the DB cluster are also rebooted. In Aurora MySQL version 2.10 and higher, you must reboot all of the reader instances manually. For more information, see Rebooting an Amazon Aurora DB cluster or Amazon Aurora DB instance.

Important

Changing a DB cluster parameter group affects all DB clusters that use that parameter group. If you want to specify different binary logging formats for different Aurora MySQL DB clusters in an Amazon Region, the DB clusters must use different DB cluster parameter groups. These parameter groups identify different logging formats. Assign the appropriate DB cluster parameter group to each DB clusters. For more information about Aurora MySQL parameters, see Aurora MySQL configuration parameters.

Accessing MySQL binary logs

You can use the mysqlbinlog utility to download or stream binary logs from RDS for MySQL DB instances. The binary log is downloaded to your local computer, where you can perform actions such as replaying the log using the mysql utility. For more information about using the mysqlbinlog utility, see Using mysqlbinlog to back up binary log files in the MySQL documentation.

To run the mysqlbinlog utility against an Amazon RDS instance, use the following options:

- `--read-from-remote-server` – Required.
- `--host` – The DNS name from the endpoint of the instance.
- `--port` – The port used by the instance.
- `--user` – A MySQL user that has been granted the `REPLICATION SLAVE` permission.
- `--password` – The password for the MySQL user, or omit a password value so that the utility prompts you for a password.

- `--raw` – Download the file in binary format.
- `--result-file` – The local file to receive the raw output.
- `--stop-never` – Stream the binary log files.
- `--verbose` – When you use the `ROW` binlog format, include this option to see the row events as pseudo-SQL statements. For more information on the `--verbose` option, see mysqlbinlog row event display in the MySQL documentation.
- Specify the names of one or more binary log files. To get a list of the available logs, use the SQL command `SHOW BINARY LOGS`.

For more information about mysqlbinlog options, see mysqlbinlog — Utility for processing binary log files in the MySQL documentation.

The following examples show how to use the mysqlbinlog utility.

For Linux, macOS, or Unix:

```
mysqlbinlog \
    --read-from-remote-server \
    --host=MySQLInstance1.cg034hpkmmjt.region.rds.amazonaws.com \
    --port=3306  \
    --user ReplUser \
    --password \
    --raw \
    --verbose \
    --result-file=/tmp/ \
    binlog.00098
```

For Windows:

```
mysqlbinlog ^
    --read-from-remote-server ^
    --host=MySQLInstance1.cg034hpkmmjt.region.rds.amazonaws.com ^
    --port=3306  ^
    --user ReplUser ^
    --password ^
    --raw ^
    --verbose ^
    --result-file=/tmp/ ^
    binlog.00098
```

Binary logs must remain available on the DB instance for the mysqlbinlog utility to access them. To ensure their availability, use the mysql.rds_set_configuration stored procedure and specify a period with enough time for you to download the logs. If this configuration isn't set, Amazon RDS purges the binary logs as soon as possible, leading to gaps in the binary logs that the mysqlbinlog utility retrieves.

The following example sets the retention period to 1 day.

```
call mysql.rds_set_configuration('binlog retention hours', 24);
```

To display the current setting, use the mysql.rds_show_configuration stored procedure.

```
call mysql.rds_show_configuration;
```

Aurora PostgreSQL database log files

You can monitor the following types of Aurora PostgreSQL log files:

- PostgreSQL log
- Instance log
- IAM database authentication error log

> **Note**
>
> To enable IAM database authentication error logs, you must first enable IAM database authentication for your Aurora PostgreSQL DB cluster. For more information about enabling IAM database authentication, see Enabling and disabling IAM database authentication.

Aurora PostgreSQL logs database activities to the default PostgreSQL log file. For an on-premises PostgreSQL DB instance, these messages are stored locally in `log/postgresql.log`. For an Aurora PostgreSQL DB cluster, the log file is available on the Aurora cluster. These logs are also accessible via the Amazon Web Services Management Console, where you can view or download them. The default logging level captures login failures, fatal server errors, deadlocks, and query failures.

For more information about how you can view, download, and watch file-based database logs, see Monitoring Amazon Aurora log files. To learn more about PostgreSQL logs, see Working with Amazon RDS and Aurora PostgreSQL logs: Part 1 and Working with Amazon RDS and Aurora PostgreSQL logs: Part 2.

In addition to the standard PostgreSQL logs discussed in this topic, Aurora PostgreSQL also supports the PostgreSQL Audit extension (`pgAudit`). Most regulated industries and government agencies need to maintain an audit log or audit trail of changes made to data to comply with legal requirements. For information about installing and using pgAudit, see Using pgAudit to log database activity.

Aurora creates a separate log file for DB instances that have auto-pause enabled. This instance.log file records any reasons why these DB instances couldn't be paused when expected. For more information on instance log file behavior and Aurora auto-pause capability, see Monitoring Aurora serverless pause and resume activity.

Topics

- Parameters for logging in Aurora PostgreSQL
- Turning on query logging for your Aurora PostgreSQL DB cluster

Parameters for logging in Aurora PostgreSQL

You can customize the logging behavior for your Aurora PostgreSQL DB cluster by modifying various parameters. In the following table you can find the parameters that affect how long the logs are stored, when to rotate the log, and whether to output the log as a CSV (comma-separated value) format. You can also find the text output sent to STDERR, among other settings. To change settings for the parameters that are modifiable, use a custom DB cluster parameter group for your Aurora PostgreSQL DB cluster. For more information, see Parameter groups for Amazon Aurora.

Parameter	Default	Description
log_destination	stderr	Sets the output format for the log. The default is `stderr`, but you can also specify comma-separated values (CSV) by adding `csvlog` to the setting. To output the log in JSON format, add `jsonlog` to the setting. The `jsonlog` value is available for PostgreSQL version 15 and later. For more information, see Setting the log destination (`stderr`, `csvlog`, `jsonlog`).
log_filename	postgresql.log.%Y-%m-%d-%H%M	Specifies the pattern for the log file name. In addition to the default, this parameter supports `postgresql.log.%Y-%m-%d` and `postgresql.log.%Y-%m-%d-%H` for the filename pattern. For Aurora PostgreSQL version 17.4 and later, you can't modify this parameter.
log_line_prefix	%t:%r:%u@%d:[%p]:	Defines the prefix for each log line that gets written to `stderr`, to note the time (%t),

Parameter	Default	Description
		remote host (%r), user (%u), database (%d), and process ID (%p).
log_rotation_age	60	Minutes after which log file is automatically rotated. You can change this value within the range of 1 and 1440 minutes. For more infor mation, see Setting log file rotation.
log_rotation_size	–	The size (kB) at which the log is automatically rotated. You can change this value within the range of 50,000 to 1,000,000 kilobytes. To learn more, see Setting log file rotation.
rds.log_retention_ period	4320	PostgreSQL logs that are older than the specified number of minutes are deleted. The default value of 4320 minutes deletes log files after 3 days. For more information, see Setting the log retention period.

To identify application issues, you can look for query failures, login failures, deadlocks, and fatal server errors in the log. For example, suppose that you converted a legacy application from Oracle to Aurora PostgreSQL, but not all queries converted correctly. These incorrectly formatted queries generate error messages that you can find in the logs to help identify problems. For more information about logging queries, see Turning on query logging for your Aurora PostgreSQL DB cluster .

In the following topics, you can find information about how to set various parameters that control the basic details for your PostgreSQL logs.

Topics

- Setting the log retention period
- Setting log file rotation
- Setting the log destination (stderr, csvlog, jsonlog)
- Understanding the log_line_prefix parameter

Setting the log retention period

The `rds.log_retention_period` parameter specifies how long your Aurora PostgreSQL DB cluster keeps its log files. The default setting is 3 days (4,320 minutes), but you can set this value to anywhere from 1 day (1,440 minutes) to 7 days (10,080 minutes). Be sure that your Aurora PostgreSQL DB cluster has sufficient storage to hold the log files for the period of time.

We recommend that you have your logs routinely published to Amazon CloudWatch Logs so that you can view and analyze system data long after the logs have been removed from your Aurora PostgreSQL DB cluster. For more information, see Publishing Aurora PostgreSQL logs to Amazon CloudWatch Logs. After you set up CloudWatch publishing, Aurora doesn't delete a log until after it's published to CloudWatch Logs.

Amazon Aurora compresses older PostgreSQL logs when storage for the DB instance reaches a threshold. Aurora compresses the files using the gzip compression utility. For more information, see the gzip website.

When storage for the DB instance is low and all available logs are compressed, you get a warning such as the following:

```
Warning: local storage for PostgreSQL log files is critically low for
this Aurora PostgreSQL instance, and could lead to a database outage.
```

If there's not enough storage, Aurora might delete compressed PostgreSQL logs before the end of a specified retention period. If that happens, you see a message similar to the following:

```
The oldest PostgreSQL log files were deleted due to local storage constraints.
```

Setting log file rotation

Aurora creates new log files every hour by default. The timing is controlled by the `log_rotation_age` parameter. This parameter has a default value of 60 (minutes), but you can set it to anywhere from 1 minute to 24 hours (1,440 minutes). When it's time for rotation, a new distinct log file is created. The file is named according to the pattern specified by the `log_filename` parameter.

Log files can also be rotated according to their size, as specified in the `log_rotation_size` parameter. This parameter specifies that the log should be rotated when it reaches the specified size (in kilobytes). The default `log_rotation_size` is 100000 kB (kilobytes) for an Aurora PostgreSQL DB cluster, but you can set this value to anywhere from 50,000 to 1,000,000 kilobytes.

The log file names are based on the file name pattern specified in the `log_filename` parameter. The available settings for this parameter are as follows:

- `postgresql.log.%Y-%m-%d` – Default format for the log file name. Includes the year, month, and date in the name of the log file.
- `postgresql.log.%Y-%m-%d-%H` – Includes the hour in the log file name format.
- `postgresql.log.%Y-%m-%d-%H%M` – Includes hour:minute in the log file name format.

If you set `log_rotation_age` parameter to less than 60 minutes, set the `log_filename` parameter to the minute format.

For more information, see `log_rotation_age` and `log_rotation_size` in the PostgreSQL documentation.

Setting the log destination (`stderr`, `csvlog`, `jsonlog`)

By default, Aurora PostgreSQL generates logs in standard error (stderr) format. This format is the default setting for the `log_destination` parameter. Each message is prefixed using the pattern specified in the `log_line_prefix` parameter. For more information, see Understanding the log_line_prefix parameter.

Aurora PostgreSQL can also generate the logs in `csvlog` format. The `csvlog` is useful for analyzing the log data as comma-separated values (CSV) data. For example, suppose that you use the `log_fdw` extension to work with your logs as foreign tables. The foreign table created on `stderr` log files contains a single column with log event data. By adding `csvlog` to the `log_destination` parameter, you get the log file in the CSV format with demarcations for the multiple columns of the foreign table. You can now sort and analyze your logs more easily.

Aurora PostgreSQL can also generate the logs in `jsonlog` format, which outputs the log in JSON format. The `jsonlog` value is available for PostgreSQL version 15 and later. Like `csvlog`, adding `jsonlog` to the `log_destination` parameter generates both the `stderr` log and a JSON log file. The JSON format makes it easier to parse and analyze your logs programmatically.

If you specify `csvlog` or `jsonlog` for this parameter, PostgreSQL generates both `stderr` and the additional `csvlog` or `jsonlog` files. Make sure to monitor the storage consumed by the logs, taking into account the `rds.log_retention_period` and other settings that affect log storage and turnover. Using `stderr` together with `csvlog` or `jsonlog` more than doubles the storage consumed by the logs.

If you add `csvlog` to `log_destination` and you want to revert to `stderr` alone, you need to reset the parameter. To do so, open the Amazon RDS console and then open the custom DB cluster parameter group for your instance. Choose **Edit**, choose the **log_destination** parameter, choose **Set to default value**, and then choose **Save Changes**.

For more information about configuring logging, see Working with Amazon RDS and Aurora PostgreSQL logs: Part 1.

Understanding the log_line_prefix parameter

The `stderr` log format prefixes each log message with the details specified by the `log_line_prefix` parameter. The default value is:

```
%t:%r:%u@%d:[%p]:
```

Starting from Aurora PostgreSQL version 16, you can also choose:

```
%m:%r:%u@%d:[%p]:%l:%e:%s:%v:%x:%c:%q%a:
```

Each log entry sent to stderr includes the following information based on the selected value:

- `%t` – Time of log entry without milliseconds
- `%m` – Time of log entry with milliseconds
- `%r` – Remote host address
- `%u@%d` – User name @ database name
- `[%p]` – Process ID if available
- `%l` – Log line number per session
- `%e` – SQL error code
- `%s` – Process start timestamp
- `%v` – Virtual transaction id
- `%x` – Transaction ID
- `%c` – Session ID
- `%q` – Non-session terminator
- `%a` – Application name

Turning on query logging for your Aurora PostgreSQL DB cluster

You can collect more detailed information about your database activities, including queries, queries waiting for locks, checkpoints, and many other details by setting some of the parameters listed in the following table. This topic focuses on logging queries.

Parameter	Default	Description
log_connections	–	Logs each successful connection. To learn how to use this parameter with `log_disconnections` to detect connection churn, see Managing Aurora PostgreSQL connection churn with pooling.
log_disconnections	–	Logs the end of each session and its duration. To learn how to use this parameter with `log_connections` to detect connection churn, see Managing Aurora PostgreSQL connection churn with pooling.
log_checkpoints	–	Not applicable for Aurora PostgreSQL
log_lock_waits	–	Logs long lock waits. By default, this parameter isn't set.
log_min_duration_sample	–	(ms) Sets the minimum execution time above which a sample of statements is logged. Sample size is set using the `log_statement_sample_rate` parameter.
log_min_duration_statement	–	Any SQL statement that runs atleast for the specified amount of time or longer gets logged. By default, this parameter isn't set. Turning on this parameter can help you find unoptimized queries.
log_statement	–	Sets the type of statements logged. By default, this parameter isn't set, but you can change it to `all`, `ddl`, or mod to specify

Parameter	Default	Description
		the types of SQL statements that you want logged. If you specify anything other than none for this parameter, you should also take additional steps to prevent the exposure of passwords in the log files. For more informati on, see Mitigating risk of password exposure when using query logging.
log_statement_samp le_rate	–	The percentage of statements exceeding the time specified in `log_min_duration_s ample` to be logged, expressed as a floating point value between 0.0 and 1.0.
log_statement_stats	–	Writes cumulative performance statistics to the server log.

Using logging to find slow performing queries

You can log SQL statements and queries to help find slow performing queries. You turn on this capability by modifying the settings in the `log_statement` and `log_min_duration` parameters as outlined in this section. Before turning on query logging for your Aurora PostgreSQL DB cluster, you should be aware of possible password exposure in the logs and how to mitigate the risks. For more information, see Mitigating risk of password exposure when using query logging.

Following, you can find reference information about the `log_statement` and `log_min_duration` parameters.

log_statement

This parameter specifies the type of SQL statements that should get sent to the log. The default value is none. If you change this parameter to `all`, `ddl`, or `mod`, be sure to apply recommended actions to mitigate the risk of exposing passwords in the logs. For more information, see Mitigating risk of password exposure when using query logging.

all

Logs all statements. This setting is recommended for debugging purposes.

ddl

Logs all data definition language (DDL) statements, such as CREATE, ALTER, DROP, and so on.

mod

Logs all DDL statements and data manipulation language (DML) statements, such as INSERT, UPDATE, and DELETE, which modify the data.

none

No SQL statements get logged. We recommend this setting to avoid the risk of exposing passwords in the logs.

log_min_duration_statement

Any SQL statement that runs atleast for the specified amount of time or longer gets logged. By default, this parameter isn't set. Turning on this parameter can help you find unoptimized queries.

–1–2147483647

The number of milliseconds (ms) of runtime over which a statement gets logged.

To set up query logging

These steps assume that your Aurora PostgreSQL DB cluster uses a custom DB cluster parameter group.

1. Set the `log_statement` parameter to `all`. The following example shows the information that is written to the `postgresql.log` file with this parameter setting.

```
2022-10-05 22:05:52 UTC:52.95.4.1(11335):postgres@labdb:[3639]:LOG: statement:
 SELECT feedback, s.sentiment,s.confidence
FROM support,aws_comprehend.detect_sentiment(feedback, 'en') s
ORDER BY s.confidence DESC;
2022-10-05 22:05:52 UTC:52.95.4.1(11335):postgres@labdb:[3639]:LOG: QUERY
 STATISTICS
2022-10-05 22:05:52 UTC:52.95.4.1(11335):postgres@labdb:[3639]:DETAIL: ! system
 usage stats:
! 0.017355 s user, 0.000000 s system, 0.168593 s elapsed
! [0.025146 s user, 0.000000 s system total]
! 36644 kB max resident size
! 0/8 [0/8] filesystem blocks in/out
```

```
! 0/733 [0/1364] page faults/reclaims, 0 [0] swaps
! 0 [0] signals rcvd, 0/0 [0/0] messages rcvd/sent
! 19/0 [27/0] voluntary/involuntary context switches
2022-10-05 22:05:52 UTC:52.95.4.1(11335):postgres@labdb:[3639]:STATEMENT: SELECT
 feedback, s.sentiment,s.confidence
FROM support,aws_comprehend.detect_sentiment(feedback, 'en') s
ORDER BY s.confidence DESC;
2022-10-05 22:05:56 UTC:52.95.4.1(11335):postgres@labdb:[3639]:ERROR: syntax error
 at or near "ORDER" at character 1
2022-10-05 22:05:56 UTC:52.95.4.1(11335):postgres@labdb:[3639]:STATEMENT: ORDER BY
 s.confidence DESC;
---------------------- END OF LOG ----------------------
```

2. Set the `log_min_duration_statement` parameter. The following example shows the information that is written to the `postgresql.log` file when the parameter is set to 1.

   Queries that exceed the duration specified in the `log_min_duration_statement` parameter are logged. The following shows an example. You can view the log file for your Aurora PostgreSQL DB cluster in the Amazon RDS Console.

```
2022-10-05 19:05:19 UTC:52.95.4.1(6461):postgres@labdb:[6144]:LOG: statement: DROP
 table comments;
2022-10-05 19:05:19 UTC:52.95.4.1(6461):postgres@labdb:[6144]:LOG: duration:
 167.754 ms
2022-10-05 19:08:07 UTC::@:[355]:LOG: checkpoint starting: time
2022-10-05 19:08:08 UTC::@:[355]:LOG: checkpoint complete: wrote 11 buffers
 (0.0%); 0 WAL file(s) added, 0 removed, 0 recycled; write=1.013 s, sync=0.006 s,
 total=1.033 s; sync files=8, longest=0.004 s, average=0.001 s; distance=131028 kB,
 estimate=131028 kB
---------------------- END OF LOG ----------------------
```

Mitigating risk of password exposure when using query logging

We recommend that you keep `log_statement` set to none to avoid exposing passwords. If you set `log_statement` to `all`, `ddl`, or `mod`, we recommend that you take one or more of the following steps.

- For the client, encrypt sensitive information. For more information, see Encryption Options in the PostgreSQL documentation. Use the ENCRYPTED (and UNENCRYPTED) options of the CREATE and ALTER statements. For more information, see CREATE USER in the PostgreSQL documentation.

- For your Aurora PostgreSQL DB cluster, set up and use the PostgreSQL Auditing (pgAudit) extension. This extension redacts sensitive information in CREATE and ALTER statements sent to the log. For more information, see Using pgAudit to log database activity.
- Restrict access to the CloudWatch logs.
- Use stronger authentication mechanisms such as IAM.

Monitoring Amazon Aurora API calls in Amazon CloudTrail

Amazon CloudTrail is an Amazon service that helps you audit your Amazon account. Amazon CloudTrail is turned on for your Amazon account when you create it. For more information about CloudTrail, see the Amazon CloudTrail User Guide.

Topics

- CloudTrail integration with Amazon Aurora
- Amazon Aurora log file entries

CloudTrail integration with Amazon Aurora

All Amazon Aurora actions are logged by CloudTrail. CloudTrail provides a record of actions taken by a user, role, or an Amazon service in Amazon Aurora.

CloudTrail events

CloudTrail captures API calls for Amazon Aurora as events. An *event* represents a single request from any source and includes information about the requested action, the date and time of the action, request parameters, and so on. Events include calls from the Amazon RDS console and from code calls to the Amazon RDS API operations.

Amazon Aurora activity is recorded in a CloudTrail event in **Event history**. You can use the CloudTrail console to view the last 90 days of recorded API activity and events in an Amazon Region. For more information, see Viewing events with CloudTrail event history.

CloudTrail trails

For an ongoing record of events in your Amazon account, including events for Amazon Aurora, create a *trail*. A trail is a configuration that enables delivery of events to a specified Amazon S3 bucket. CloudTrail typically delivers log files within 15 minutes of account activity.

> **Note**
>
> If you don't configure a trail, you can still view the most recent events in the CloudTrail console in **Event history**.

You can create two types of trails for an Amazon account: a trail that applies to all Regions, or a trail that applies to one Region. By default, when you create a trail in the console, the trail applies to all Regions.

Additionally, you can configure other Amazon services to further analyze and act upon the event data collected in CloudTrail logs. For more information, see:

- Overview for creating a trail
- CloudTrail supported services and integrations
- Configuring Amazon SNS notifications for CloudTrail
- Receiving CloudTrail log files from multiple Regions and Receiving CloudTrail log files from multiple accounts

Amazon Aurora log file entries

CloudTrail log files contain one or more log entries. CloudTrail log files are not an ordered stack trace of the public API calls, so they do not appear in any specific order.

The following example shows a CloudTrail log entry that demonstrates the `CreateDBInstance` action.

```
{
    "eventVersion": "1.04",
    "userIdentity": {
        "type": "IAMUser",
        "principalId": "AKIAIOSFODNN7EXAMPLE",
        "arn": "arn:aws-cn:iam::123456789012:user/johndoe",
        "accountId": "123456789012",
        "accessKeyId": "AKIAI44QH8DHBEXAMPLE",
        "userName": "johndoe"
    },
    "eventTime": "2018-07-30T22:14:06Z",
    "eventSource": "rds.amazonaws.com",
    "eventName": "CreateDBInstance",
    "awsRegion": "us-east-1",
    "sourceIPAddress": "192.0.2.0",
    "userAgent": "aws-cli/1.15.42 Python/3.6.1 Darwin/17.7.0 botocore/1.10.42",
    "requestParameters": {
        "enableCloudwatchLogsExports": [
```

```
            "audit",
            "error",
            "general",
            "slowquery"
        ],
        "dBInstanceIdentifier": "test-instance",
        "engine": "mysql",
        "masterUsername": "myawsuser",
        "allocatedStorage": 20,
        "dBInstanceClass": "db.m1.small",
        "masterUserPassword": "****"
    },
    "responseElements": {
        "dBInstanceArn": "arn:aws-cn:rds:us-east-1:123456789012:db:test-instance",
        "storageEncrypted": false,
        "preferredBackupWindow": "10:27-10:57",
        "preferredMaintenanceWindow": "sat:05:47-sat:06:17",
        "backupRetentionPeriod": 1,
        "allocatedStorage": 20,
        "storageType": "standard",
        "engineVersion": "8.0.28",
        "dbInstancePort": 0,
        "optionGroupMemberships": [
            {
                "status": "in-sync",
                "optionGroupName": "default:mysql-8-0"
            }
        ],
        "dBParameterGroups": [
            {
                "dBParameterGroupName": "default.mysql8.0",
                "parameterApplyStatus": "in-sync"
            }
        ],
        "monitoringInterval": 0,
        "dBInstanceClass": "db.m1.small",
        "readReplicaDBInstanceIdentifiers": [],
        "dBSubnetGroup": {
            "dBSubnetGroupName": "default",
            "dBSubnetGroupDescription": "default",
            "subnets": [
                {
                    "subnetAvailabilityZone": {"name": "us-east-1b"},
                    "subnetIdentifier": "subnet-cbfff283",
```

```
                    "subnetStatus": "Active"
                },
                {
                    "subnetAvailabilityZone": {"name": "us-east-1e"},
                    "subnetIdentifier": "subnet-d7c825e8",
                    "subnetStatus": "Active"
                },
                {
                    "subnetAvailabilityZone": {"name": "us-east-1f"},
                    "subnetIdentifier": "subnet-6746046b",
                    "subnetStatus": "Active"
                },
                {
                    "subnetAvailabilityZone": {"name": "us-east-1c"},
                    "subnetIdentifier": "subnet-bac383e0",
                    "subnetStatus": "Active"
                },
                {
                    "subnetAvailabilityZone": {"name": "us-east-1d"},
                    "subnetIdentifier": "subnet-42599426",
                    "subnetStatus": "Active"
                },
                {
                    "subnetAvailabilityZone": {"name": "us-east-1a"},
                    "subnetIdentifier": "subnet-da327bf6",
                    "subnetStatus": "Active"
                }
            ],
            "vpcId": "vpc-136a4c6a",
            "subnetGroupStatus": "Complete"
        },
        "masterUsername": "myawsuser",
        "multiAZ": false,
        "autoMinorVersionUpgrade": true,
        "engine": "mysql",
        "cACertificateIdentifier": "rds-ca-2015",
        "dbiResourceId": "db-ETDZIIXHEWY5N7GXVC4SH7H5IA",
        "dBSecurityGroups": [],
        "pendingModifiedValues": {
            "masterUserPassword": "****",
            "pendingCloudwatchLogsExports": {
                "logTypesToEnable": [
                    "audit",
                    "error",
```

```
                    "general",
                    "slowquery"
                ]
            }
        },
        "dBInstanceStatus": "creating",
        "publiclyAccessible": true,
        "domainMemberships": [],
        "copyTagsToSnapshot": false,
        "dBInstanceIdentifier": "test-instance",
        "licenseModel": "general-public-license",
        "iAMDatabaseAuthenticationEnabled": false,
        "performanceInsightsEnabled": false,
        "vpcSecurityGroups": [
            {
                "status": "active",
                "vpcSecurityGroupId": "sg-f839b688"
            }
        ]
    },
    "requestID": "daf2e3f5-96a3-4df7-a026-863f96db793e",
    "eventID": "797163d3-5726-441d-80a7-6eeb7464acd4",
    "eventType": "AwsApiCall",
    "recipientAccountId": "123456789012"
}
```


As shown in the `userIdentity` element in the preceding example, every event or log entry contains information about who generated the request. The identity information helps you determine the following:

- Whether the request was made with root or IAM user credentials.
- Whether the request was made with temporary security credentials for a role or federated user.
- Whether the request was made by another Amazon service.

For more information about the `userIdentity`, see the CloudTrail userIdentity element. For more information about `CreateDBInstance` and other Amazon Aurora actions, see the Amazon RDS API Reference.

Monitoring Amazon Aurora with Database Activity Streams

By using Database Activity Streams, you can monitor near real-time streams of database activity.

Topics

- Overview of Database Activity Streams
- Network prerequisites for Aurora MySQL database activity streams
- Starting a database activity stream
- Getting the status of a database activity stream
- Stopping a database activity stream
- Monitoring database activity streams
- IAM policy examples for database activity streams

Overview of Database Activity Streams

As an Amazon Aurora database administrator, you need to safeguard your database and meet compliance and regulatory requirements. One strategy is to integrate database activity streams with your monitoring tools. In this way, you monitor and set alarms for auditing activity in your Amazon Aurora cluster.

Security threats are both external and internal. To protect against internal threats, you can control administrator access to data streams by configuring the Database Activity Streams feature. DBAs don't have access to the collection, transmission, storage, and processing of the streams.

Contents

- How database activity streams work
- Asynchronous and synchronousmode for database activity streams
- Requirements and limitations for database activity streams
- Region and version availability
- Supported DB instance classes for database activity streams

How database activity streams work

In Amazon Aurora, you start a database activity stream at the cluster level. All DB instances within your cluster have database activity streams enabled.


Your Aurora DB cluster pushes activities to an Amazon Kinesis data stream in near real time. The Kinesis stream is created automatically. From Kinesis, you can configure Amazon services such as Amazon Data Firehose and Amazon Lambda to consume the stream and store the data.

> **Important**
>
> Use of the database activity streams feature in Amazon Aurora is free, but Amazon Kinesis charges for a data stream. For more information, see Amazon Kinesis Data Streams pricing.

If you use an Aurora global database, start a database activity stream on each DB cluster separately. Each cluster delivers audit data to its own Kinesis stream within its own Amazon Web Services Region. The activity streams don't operate differently during a failover. They continue to audit your global database as usual.

You can configure applications for compliance management to consume database activity streams. For Aurora PostgreSQL, compliance applications include IBM's Security Guardium and Imperva's SecureSphere Database Audit and Protection. These applications can use the stream to generate alerts and audit activity on your Aurora DB cluster.

The following graphic shows an Aurora DB cluster configured with Amazon Data Firehose.

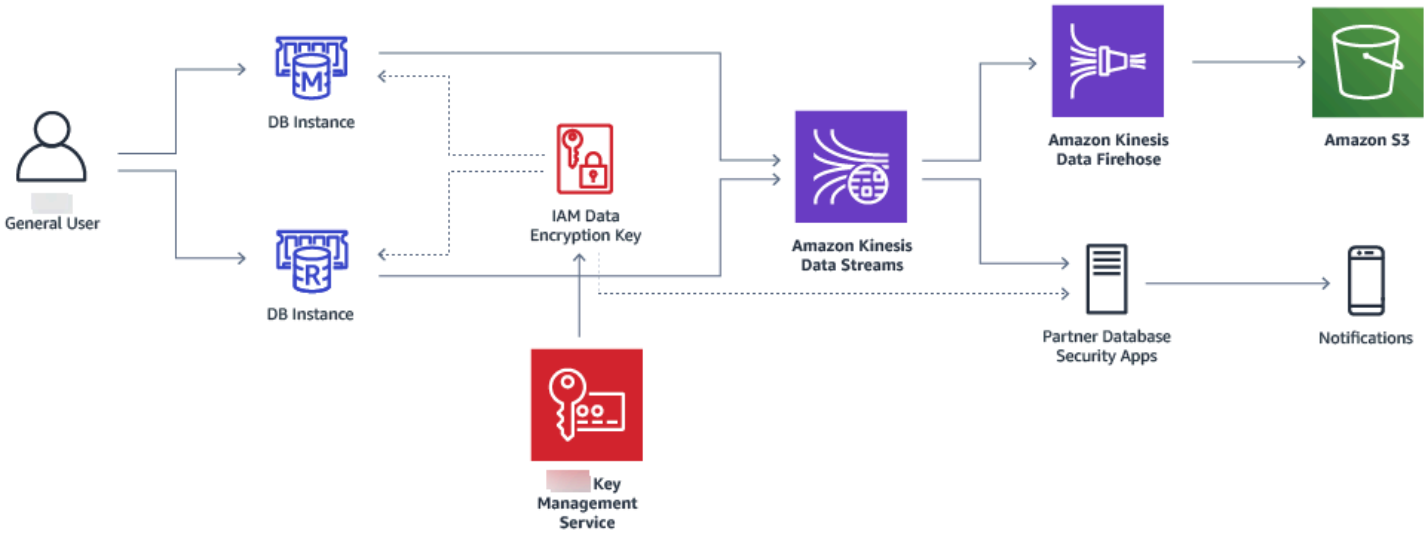

Asynchronous and synchronousmode for database activity streams

You can choose to have the database session handle database activity events in either of the following modes:

- **Asynchronous mode** – When a database session generates an activity stream event, the session returns to normal activities immediately. In the background, the activity stream event is made a durable record. If an error occurs in the background task, an RDS event is sent. This event indicates the beginning and end of any time windows where activity stream event records might have been lost.

  Asynchronous mode favors database performance over the accuracy of the activity stream.

  > **Note**
  >
  > Asynchronous mode is available for both Aurora PostgreSQL and Aurora MySQL.

- **Synchronous mode** – When a database session generates an activity stream event, the session blocks other activities until the event is made durable. If the event can't be made durable for some reason, the database session returns to normal activities. However, an RDS event is sent indicating that activity stream records might be lost for some time. A second RDS event is sent after the system is back to a healthy state.

  The synchronous mode favors the accuracy of the activity stream over database performance.

  > **Note**
  >
  > Synchronous mode is available for Aurora PostgreSQL. You can't use synchronous mode with Aurora MySQL.

Requirements and limitations for database activity streams

In Aurora, database activity streams have the following requirements and limitations:

- Amazon Kinesis is required for database activity streams.
- Amazon Key Management Service (Amazon KMS) is required for database activity streams because they are always encrypted.
- Applying additional encryption to your Amazon Kinesis data stream is incompatible with database activity streams, which are already encrypted with your Amazon KMS key.
- Start your database activity stream at the DB cluster level. If you add a DB instance to your cluster, you don't need to start an activity stream on the instance: it is audited automatically.

- In an Aurora global database, make sure to start an activity stream on each DB cluster separately. Each cluster delivers audit data to its own Kinesis stream within its own Amazon Web Services Region.
- In Aurora PostgreSQL, make sure to stop database activity stream before a major version upgrade. You can start the database activity stream after the upgrade completes.

Region and version availability

Feature availability and support varies across specific versions of each Aurora database engine, and across Amazon Web Services Regions. For more information on version and Region availability with Aurora and database activity streams, see Supported Regions and Aurora DB engines for database activity streams.

Supported DB instance classes for database activity streams

For Aurora MySQL, you can use database activity streams with the following DB instance classes:

- db.r8g.*large
- db.r7g.*large
- db.r7i.*large
- db.r6g.*large
- db.r6i.*large
- db.r5.*large
- db.x2g.*

For Aurora PostgreSQL, you can use database activity streams with the following DB instance classes:

- db.r8g.*large
- db.r7i.*large
- db.r7g.*large
- db.r6g.*large
- db.r6i.*large
- db.r6id.*large
- db.r5.*large

- db.r4.*large
- db.x2g.*

Network prerequisites for Aurora MySQL database activity streams

In the following section, you can find how to configure your virtual private cloud (VPC) for use with database activity streams.

> **Note**
>
> Aurora MySQL network prerequisites are applicable to the following engine versions:
>
> - Aurora MySQL version 2, up to 2.11.3
> - Aurora MySQL version 2.12.0
> - Aurora MySQL version 3, up to 3.04.2

Topics

- Prerequisites for Amazon KMS endpoints
- Prerequisites for public availability
- Prerequisites for private availability

Prerequisites for Amazon KMS endpoints

Instances in an Aurora MySQL cluster that use activity streams must be able to access Amazon KMS endpoints. Make sure this requirement is satisfied before enabling database activity streams for your Aurora MySQL cluster. If the Aurora cluster is publicly available, this requirement is satisfied automatically.

> **Important**
>
> If the Aurora MySQL DB cluster can't access the Amazon KMS endpoint, the activity stream stops. In that case, Aurora notifies you about this issue using RDS Events.

Prerequisites for public availability

For an Aurora DB cluster to be public, it must meet the following requirements:

- **Publicly Accessible** is **Yes** in the Amazon Web Services Management Console cluster details page.
- The DB cluster is in an Amazon VPC public subnet. For more information about publicly accessible DB instances, see Working with a DB cluster in a VPC. For more information about public Amazon VPC subnets, see Your VPC and Subnets.

Prerequisites for private availability

If your Aurora DB cluster is in a VPC public subnet and isn't publicly accessible, it's private. To keep your cluster private and use it with database activity streams, you have the following options:

- Configure Network Address Translation (NAT) in your VPC. For more information, see NAT Gateways.
- Create an Amazon KMS endpoint in your VPC. This option is recommended because it's easier to configure.

To create an Amazon KMS endpoint in your VPC

1. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.
2. In the navigation pane, choose **Endpoints**.
3. Choose **Create Endpoint**.

   The **Create Endpoint** page appears.
4. Do the following:
   - In **Service category**, choose **Amazon services**.
   - In **Service Name**, choose **com.amazonaws.*region*.kms**, where *region* is the Amazon Web Services Region where your cluster is located.
   - For **VPC**, choose the VPC where your cluster is located.
5. Choose **Create Endpoint**.

For more information about configuring VPC endpoints, see VPC Endpoints.

Starting a database activity stream

To monitor database activity for all instances in your Aurora DB cluster, start an activity stream at the cluster level. Any DB instances that you add to the cluster are also automatically monitored. If you use an Aurora global database, start a database activity stream on each DB cluster separately. Each cluster delivers audit data to its own Kinesis stream within its own Amazon Web Services Region.

When you start an activity stream, each database activity event that you configured in the audit policy generates an activity stream event. SQL commands such as `CONNECT` and `SELECT` generate access events. SQL commands such as `CREATE` and `INSERT` generate change events.

Console

To start a database activity stream

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the DB cluster on which you want to start an activity stream.
4. For **Actions**, choose **Start activity stream**.

   The **Start database activity stream:** *name* window appears, where *name* is your DB cluster.
5. Enter the following settings:

   - For **Amazon KMS key**, choose a key from the list of Amazon KMS keys.

     > **Note**
     >
     > If your Aurora MySQL cluster can't access KMS keys, follow the instructions in Network prerequisites for Aurora MySQL database activity streams to enable such access first.

     Aurora uses the KMS key to encrypt the key that in turn encrypts database activity. Choose a KMS key other than the default key. For more information about encryption keys and Amazon KMS, see What is Amazon Key Management Service? in the *Amazon Key Management Service Developer Guide.*
   - For **Database activity stream mode**, choose **Asynchronous** or **Synchronous**.

> **Note**
>
> This choice applies only to Aurora PostgreSQL. For Aurora MySQL, you can use only asynchronous mode.

- Choose **Immediately**.

  When you choose **Immediately**, the DB cluster restarts right away. If you choose **During the next maintenance window**, the DB cluster doesn't restart right away. In this case, the database activity stream doesn't start until the next maintenance window.

6. Choose **Start database activity stream**.

   The status for the DB cluster shows that the activity stream is starting.

> **Note**
>
> If you get the error `You can't start a database activity stream in this configuration`, check Supported DB instance classes for database activity streams to see whether your DB cluster is using a supported instance class.

Amazon CLI

To start database activity streams for a DB cluster , configure the DB cluster using the start-activity-stream Amazon CLI command.

- `--resource-arn` *`arn`* – Specifies the Amazon Resource Name (ARN) of the DB cluster.
- `--mode` *`sync-or-async`* – Specifies either synchronous (`sync`) or asynchronous (`async`) mode. For Aurora PostgreSQL, you can choose either value. For Aurora MySQL, specify `async`.
- `--kms-key-id` *`key`* – Specifies the KMS key identifier for encrypting messages in the database activity stream. The Amazon KMS key identifier is the key ARN, key ID, alias ARN, or alias name for the Amazon KMS key.

The following example starts a database activity stream for a DB cluster in asynchronous mode.

For Linux, macOS, or Unix:

```
aws rds start-activity-stream \
    --mode async \
    --kms-key-id my-kms-key-arn \
    --resource-arn my-cluster-arn \
    --apply-immediately
```

For Windows:

```
aws rds start-activity-stream ^
    --mode async ^
    --kms-key-id my-kms-key-arn ^
    --resource-arn my-cluster-arn ^
    --apply-immediately
```

Amazon RDS API

To start database activity streams for a DB cluster, configure the cluster using the StartActivityStream operation.

Call the action with the parameters below:

- `Region`
- `KmsKeyId`
- `ResourceArn`
- `Mode`

Note

If you get an error stating that you can't start a database activity stream with the current version of your Aurora PostgreSQL database, apply the latest patch for Aurora PostgreSQL before starting a database activity stream. For information about upgrading your Aurora PostgreSQL database, see Upgrading Amazon Aurora DB clusters.
Following are the minimum patch versions to start database activity streams with Aurora PostgreSQL.

- 3.4.15 (11.9.15), 11.21.10
- 12.9.15, 12.15.9, 12.16.10, 12.17.7, 12.18.5, 12.19.4, 12.20.3, 12.22.3
- 13.9.12, 13.11.9, 13.12.10, 13.13.7, 13.14.5, 13.15.4, 13.16.3, 13.18.3

- 14.6.12, 14.8.9, 14.9.10, 14.10.7, 14.11.5, 14.12.4, 14.13.3, 14.15.3
- 15.3.9, 15.4.10, 15.5.7, 15.6.5, 15.7.4, 15.8.3, 15.10.3
- 16.1.7, 16.2.5, 16.3.4, 16.4.3, 16.6.3

Getting the status of a database activity stream

You can get the status of an activity stream using the console or Amazon CLI.

Console

To get the status of a database activity stream

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB cluster link.
3. Choose the **Configuration** tab, and check **Database activity stream** for status.

Amazon CLI

You can get the activity stream configuration for a DB cluster as the response to a describe-db-clusters CLI request.

The following example describes *my-cluster*.

```
aws rds --region my-region describe-db-clusters --db-cluster-identifier my-cluster
```

The following example shows a JSON response. The following fields are shown:

- `ActivityStreamKinesisStreamName`
- `ActivityStreamKmsKeyId`
- `ActivityStreamStatus`
- `ActivityStreamMode`
-

These fields are the same for Aurora PostgreSQL and Aurora MySQL, except that `ActivityStreamMode` is always `async` for Aurora MySQL, while for Aurora PostgreSQL it might be `sync` or `async`.

```
{
    "DBClusters": [
        {
      "DBClusterIdentifier": "my-cluster",
            ...
            "ActivityStreamKinesisStreamName": "aws-rds-das-cluster-
A6TSYXITZCZXJHIRVFUBZ5LTWY",
            "ActivityStreamStatus": "starting",
            "ActivityStreamKmsKeyId": "12345678-abcd-efgh-ijkl-bd041f170262",
            "ActivityStreamMode": "async",
            "DbClusterResourceId": "cluster-ABCD123456"
            ...
        }
    ]
}
```

RDS API

You can get the activity stream configuration for a DB cluster as the response to a DescribeDBClusters operation.

Stopping a database activity stream

You can stop an activity stream using the console or Amazon CLI.

If you delete your DB cluster, the activity stream is stopped and the underlying Amazon Kinesis stream is deleted automatically.

Console

To turn off an activity stream

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose a DB cluster that you want to stop the database activity stream for.
4. For **Actions**, choose **Stop activity stream**. The **Database Activity Stream** window appears.
    a. Choose **Immediately**.

When you choose **Immediately**, the DB cluster restarts right away. If you choose **During the next maintenance window**, the DB cluster doesn't restart right away. In this case, the database activity stream doesn't stop until the next maintenance window.

b. Choose **Continue**.

Amazon CLI

To stop database activity streams for your DB cluster, configure the DB cluster using the Amazon CLI command stop-activity-stream. Identify the Amazon Region for the DB cluster using the `--region` parameter. The `--apply-immediately` parameter is optional.

For Linux, macOS, or Unix:

```
aws rds --region MY_REGION \
    stop-activity-stream \
    --resource-arn MY_CLUSTER_ARN \
    --apply-immediately
```

For Windows:

```
aws rds --region MY_REGION ^
    stop-activity-stream ^
    --resource-arn MY_CLUSTER_ARN ^
    --apply-immediately
```

RDS API

To stop database activity streams for your DB cluster, configure the cluster using the StopActivityStream operation. Identify the Amazon Region for the DB cluster using the `Region` parameter. The `ApplyImmediately` parameter is optional.

Monitoring database activity streams

Database activity streams monitor and report activities. The stream of activity is collected and transmitted to Amazon Kinesis. From Kinesis, you can monitor the activity stream, or other services and applications can consume the activity stream for further analysis. You can find the underlying Kinesis stream name by using the Amazon CLI command `describe-db-clusters` or the RDS API `DescribeDBClusters` operation.

Aurora manages the Kinesis stream for you as follows:

- Aurora creates the Kinesis stream automatically with a 24-hour retention period.
- Aurora scales the Kinesis stream if necessary.
- If you stop the database activity stream or delete the DB cluster, Aurora deletes the Kinesis stream.

The following categories of activity are monitored and put in the activity stream audit log:

- **SQL commands** – All SQL commands are audited, and also prepared statements, built-in functions, and functions in PL/SQL. Calls to stored procedures are audited. Any SQL statements issued inside stored procedures or functions are also audited.
- **Other database information** – Activity monitored includes the full SQL statement, the row count of affected rows from DML commands, accessed objects, and the unique database name. For Aurora PostgreSQL, database activity streams also monitor the bind variables and stored procedure parameters.

  Important

  The full SQL text of each statement is visible in the activity stream audit log, including any sensitive data. However, database user passwords are redacted if Aurora can determine them from the context, such as in the following SQL statement.

  ```
  ALTER ROLE role-name WITH password
  ```

- **Connection information** – Activity monitored includes session and network information, the server process ID, and exit codes.

If an activity stream has a failure while monitoring your DB instance, you are notified through RDS events.

In the following sections, you can access, audit, and process database activity streams.

Topics

- Accessing an activity stream from Amazon Kinesis
- Audit log contents and examples for database activity streams

- databaseActivityEventList JSON array for database activity streams
- Processing a database activity stream using the Amazon SDK

Accessing an activity stream from Amazon Kinesis

When you enable an activity stream for a DB cluster, a Kinesis stream is created for you. From Kinesis, you can monitor your database activity in real time. To further analyze database activity, you can connect your Kinesis stream to consumer applications. You can also connect the stream to compliance management applications such as IBM's Security Guardium or Imperva's SecureSphere Database Audit and Protection.

You can access your Kinesis stream either from the RDS console or the Kinesis console.

To access an activity stream from Kinesis using the RDS console

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the DB cluster on which you started an activity stream.
4. Choose **Configuration**.
5. Under **Database activity stream**, choose the link under **Kinesis stream**.
6. In the Kinesis console, choose **Monitoring** to begin observing the database activity.

To access an activity stream from Kinesis using the Kinesis console

1. Open the Kinesis console at https://console.amazonaws.cn/kinesis.
2. Choose your activity stream from the list of Kinesis streams.

   An activity stream's name includes the prefix `aws-rds-das-cluster-` followed by the resource ID of the DB cluster. The following is an example.

   ```
   aws-rds-das-cluster-NHVOV4PCLWHGF52NP
   ```

   To use the Amazon RDS console to find the resource ID for the DB cluster, choose your DB cluster from the list of databases, and then choose the **Configuration** tab.

To use the Amazon CLI to find the full Kinesis stream name for an activity stream, use a describe-db-clusters CLI request and note the value of `ActivityStreamKinesisStreamName` in the response.

3. Choose **Monitoring** to begin observing the database activity.

For more information about using Amazon Kinesis, see What Is Amazon Kinesis Data Streams?.

Audit log contents and examples for database activity streams

Monitored events are represented in the database activity stream as JSON strings. The structure consists of a JSON object containing a `DatabaseActivityMonitoringRecord`, which in turn contains a `databaseActivityEventList` array of activity events.

> **Note**
>
> For database activity streams, the `paramList` JSON array doesn't include null values from Hibernate applications.

Topics

- Examples of an audit log for an activity stream
- DatabaseActivityMonitoringRecords JSON object
- databaseActivityEvents JSON Object

Examples of an audit log for an activity stream

Following are sample decrypted JSON audit logs of activity event records.

Example Activity event record of an Aurora PostgreSQL CONNECT SQL statement

The following activity event record shows a login with the use of a `CONNECT` SQL statement (`command`) by a psql client (`clientApplication`).

```
{
  "type":"DatabaseActivityMonitoringRecords",
  "version":"1.1",
  "databaseActivityEvents":
```

```
    {
      "type":"DatabaseActivityMonitoringRecord",
      "clusterId":"cluster-4HNY5V4RRNPKKYB7ICFKE5JBQQ",
      "instanceId":"db-FZJTMYKCXQBUUZ6VLU7NW3ITCM",
      "databaseActivityEventList":[
        {
          "startTime": "2019-10-30 00:39:49.940668+00",
          "logTime": "2019-10-30 00:39:49.990579+00",
          "statementId": 1,
          "substatementId": 1,
          "objectType": null,
          "command": "CONNECT",
          "objectName": null,
          "databaseName": "postgres",
          "dbUserName": "rdsadmin",
          "remoteHost": "172.31.3.195",
          "remotePort": "49804",
          "sessionId": "5ce5f7f0.474b",
          "rowCount": null,
          "commandText": null,
          "paramList": [],
          "pid": 18251,
          "clientApplication": "psql",
          "exitCode": null,
          "class": "MISC",
          "serverVersion": "2.3.1",
          "serverType": "PostgreSQL",
          "serviceName": "Amazon Aurora PostgreSQL-Compatible edition",
          "serverHost": "172.31.3.192",
          "netProtocol": "TCP",
          "dbProtocol": "Postgres 3.0",
          "type": "record",
          "errorMessage": null
        }
      ]
    },
   "key":"decryption-key"
}
```


Example Activity event record of an Aurora MySQL CONNECT SQL statement

The following activity event record shows a logon with the use of a `CONNECT` SQL statement (`command`) by a mysql client (`clientApplication`).

```
{
  "type":"DatabaseActivityMonitoringRecord",
  "clusterId":"cluster-some_id",
  "instanceId":"db-some_id",
  "databaseActivityEventList":[
    {
      "logTime":"2020-05-22 18:07:13.267214+00",
      "type":"record",
      "clientApplication":null,
      "pid":2830,
      "dbUserName":"rdsadmin",
      "databaseName":"",
      "remoteHost":"localhost",
      "remotePort":"11053",
      "command":"CONNECT",
      "commandText":"",
      "paramList":null,
      "objectType":"TABLE",
      "objectName":"",
      "statementId":0,
      "substatementId":1,
      "exitCode":"0",
      "sessionId":"725121",
      "rowCount":0,
      "serverHost":"master",
      "serverType":"MySQL",
      "serviceName":"Amazon Aurora MySQL",
      "serverVersion":"MySQL 5.7.12",
      "startTime":"2020-05-22 18:07:13.267207+00",
      "endTime":"2020-05-22 18:07:13.267213+00",
      "transactionId":"0",
      "dbProtocol":"MySQL",
      "netProtocol":"TCP",
      "errorMessage":"",
      "class":"MAIN"
    }
  ]
}
```

Example Activity event record of an Aurora PostgreSQL CREATE TABLE statement

The following example shows a `CREATE TABLE` event for Aurora PostgreSQL.

```
{
  "type":"DatabaseActivityMonitoringRecords",
  "version":"1.1",
  "databaseActivityEvents":
    {
      "type":"DatabaseActivityMonitoringRecord",
      "clusterId":"cluster-4HNY5V4RRNPKKYB7ICFKE5JBQQ",
      "instanceId":"db-FZJTMYKCXQBUUZ6VLU7NW3ITCM",
      "databaseActivityEventList":[
        {
          "startTime": "2019-05-24 00:36:54.403455+00",
          "logTime": "2019-05-24 00:36:54.494235+00",
          "statementId": 2,
          "substatementId": 1,
          "objectType": null,
          "command": "CREATE TABLE",
          "objectName": null,
          "databaseName": "postgres",
          "dbUserName": "rdsadmin",
          "remoteHost": "172.31.3.195",
          "remotePort": "34534",
          "sessionId": "5ce73c6f.7e64",
          "rowCount": null,
          "commandText": "create table my_table (id serial primary key, name
 varchar(32));",
          "paramList": [],
          "pid": 32356,
          "clientApplication": "psql",
          "exitCode": null,
          "class": "DDL",
          "serverVersion": "2.3.1",
          "serverType": "PostgreSQL",
          "serviceName": "Amazon Aurora PostgreSQL-Compatible edition",
          "serverHost": "172.31.3.192",
          "netProtocol": "TCP",
          "dbProtocol": "Postgres 3.0",
          "type": "record",
          "errorMessage": null
        }
      ]
    },
   "key":"decryption-key"
}
```

Example Activity event record of an Aurora MySQL CREATE TABLE statement

The following example shows a `CREATE TABLE` statement for Aurora MySQL. The operation is represented as two separate event records. One event has `"class":"MAIN"`. The other event has `"class":"AUX"`. The messages might arrive in any order. The `logTime` field of the `MAIN` event is always earlier than the `logTime` fields of any corresponding `AUX` events.

The following example shows the event with a `class` value of `MAIN`.


```
{
  "type":"DatabaseActivityMonitoringRecord",
  "clusterId":"cluster-some_id",
  "instanceId":"db-some_id",
  "databaseActivityEventList":[
    {
      "logTime":"2020-05-22 18:07:12.250221+00",
      "type":"record",
      "clientApplication":null,
      "pid":2830,
      "dbUserName":"master",
      "databaseName":"test",
      "remoteHost":"localhost",
      "remotePort":"11054",
      "command":"QUERY",
      "commandText":"CREATE TABLE test1 (id INT)",
      "paramList":null,
      "objectType":"TABLE",
      "objectName":"test1",
      "statementId":65459278,
      "substatementId":1,
      "exitCode":"0",
      "sessionId":"725118",
      "rowCount":0,
      "serverHost":"master",
      "serverType":"MySQL",
      "serviceName":"Amazon Aurora MySQL",
      "serverVersion":"MySQL 5.7.12",
      "startTime":"2020-05-22 18:07:12.226384+00",
      "endTime":"2020-05-22 18:07:12.250222+00",
      "transactionId":"0",
      "dbProtocol":"MySQL",
      "netProtocol":"TCP",
      "errorMessage":"",
```

```
      "class":"MAIN"
    }
  ]
}
```

The following example shows the corresponding event with a `class` value of AUX.

```
{
  "type":"DatabaseActivityMonitoringRecord",
  "clusterId":"cluster-some_id",
  "instanceId":"db-some_id",
  "databaseActivityEventList":[
    {
      "logTime":"2020-05-22 18:07:12.247182+00",
      "type":"record",
      "clientApplication":null,
      "pid":2830,
      "dbUserName":"master",
      "databaseName":"test",
      "remoteHost":"localhost",
      "remotePort":"11054",
      "command":"CREATE",
      "commandText":"test1",
      "paramList":null,
      "objectType":"TABLE",
      "objectName":"test1",
      "statementId":65459278,
      "substatementId":2,
      "exitCode":"",
      "sessionId":"725118",
      "rowCount":0,
      "serverHost":"master",
      "serverType":"MySQL",
      "serviceName":"Amazon Aurora MySQL",
      "serverVersion":"MySQL 5.7.12",
      "startTime":"2020-05-22 18:07:12.226384+00",
      "endTime":"2020-05-22 18:07:12.247182+00",
      "transactionId":"0",
      "dbProtocol":"MySQL",
      "netProtocol":"TCP",
      "errorMessage":"",
      "class":"AUX"
    }
```

```
  ]
}
```

Example Activity event record of an Aurora PostgreSQL SELECT statement

The following example shows a SELECT event .

```
{
  "type":"DatabaseActivityMonitoringRecords",
  "version":"1.1",
  "databaseActivityEvents":
    {
      "type":"DatabaseActivityMonitoringRecord",
      "clusterId":"cluster-4HNY5V4RRNPKKYB7ICFKE5JBQQ",
      "instanceId":"db-FZJTMYKCXQBUUZ6VLU7NW3ITCM",
      "databaseActivityEventList":[
        {
          "startTime": "2019-05-24 00:39:49.920564+00",
          "logTime": "2019-05-24 00:39:49.940668+00",
          "statementId": 6,
          "substatementId": 1,
          "objectType": "TABLE",
          "command": "SELECT",
          "objectName": "public.my_table",
          "databaseName": "postgres",
          "dbUserName": "rdsadmin",
          "remoteHost": "172.31.3.195",
          "remotePort": "34534",
          "sessionId": "5ce73c6f.7e64",
          "rowCount": 10,
          "commandText": "select * from my_table;",
          "paramList": [],
          "pid": 32356,
          "clientApplication": "psql",
          "exitCode": null,
          "class": "READ",
          "serverVersion": "2.3.1",
          "serverType": "PostgreSQL",
          "serviceName": "Amazon Aurora PostgreSQL-Compatible edition",
          "serverHost": "172.31.3.192",
          "netProtocol": "TCP",
          "dbProtocol": "Postgres 3.0",
          "type": "record",
          "errorMessage": null
```

```
        }
      ]
    },
   "key":"decryption-key"
}
```

```
{
    "type": "DatabaseActivityMonitoringRecord",
    "clusterId": "",
    "instanceId": "db-4JCWQLUZVFYP7DIWP6JVQ77O3Q",
    "databaseActivityEventList": [
        {
            "class": "TABLE",
            "clientApplication": "Microsoft SQL Server Management Studio - Query",
            "command": "SELECT",
            "commandText": "select * from [testDB].[dbo].[TestTable]",
            "databaseName": "testDB",
            "dbProtocol": "SQLSERVER",
            "dbUserName": "test",
            "endTime": null,
            "errorMessage": null,
            "exitCode": 1,
            "logTime": "2022-10-06 21:24:59.9422268+00",
            "netProtocol": null,
            "objectName": "TestTable",
            "objectType": "TABLE",
            "paramList": null,
            "pid": null,
            "remoteHost": "local machine",
            "remotePort": null,
            "rowCount": 0,
            "serverHost": "172.31.30.159",
            "serverType": "SQLSERVER",
            "serverVersion": "15.00.4073.23.v1.R1",
            "serviceName": "sqlserver-ee",
            "sessionId": 62,
            "startTime": null,
            "statementId": "0x03baed90412f564fad640ebe51f89b99",
            "substatementId": 1,
            "transactionId": "4532935",
            "type": "record",
            "engineNativeAuditFields": {
                "target_database_principal_id": 0,
```

```
                "target_server_principal_id": 0,
                "target_database_principal_name": "",
                "server_principal_id": 2,
                "user_defined_information": "",
                "response_rows": 0,
                "database_principal_name": "dbo",
                "target_server_principal_name": "",
                "schema_name": "dbo",
                "is_column_permission": true,
                "object_id": 581577110,
                "server_instance_name": "EC2AMAZ-NFUJJNO",
                "target_server_principal_sid": null,
                "additional_information": "",
                "duration_milliseconds": 0,
                "permission_bitmask": "0x00000000000000000000000000000001",
                "data_sensitivity_information": "",
                "session_server_principal_name": "test",
                "connection_id": "AD3A5084-FB83-45C1-8334-E923459A8109",
                "audit_schema_version": 1,
                "database_principal_id": 1,
                "server_principal_sid":
 "0x0105000000000005150000000bdc2795e2d0717901ba6998cf4010000",
                "user_defined_event_id": 0,
                "host_name": "EC2AMAZ-NFUJJNO"
            }
        }
    ]
}
```

Example Activity event record of an Aurora MySQL SELECT statement

The following example shows a SELECT event.

The following example shows the event with a `class` value of `MAIN`.

```
{
  "type":"DatabaseActivityMonitoringRecord",
  "clusterId":"cluster-some_id",
  "instanceId":"db-some_id",
  "databaseActivityEventList":[
    {
      "logTime":"2020-05-22 18:29:57.986467+00",
      "type":"record",
      "clientApplication":null,
```

```
      "pid":2830,
      "dbUserName":"master",
      "databaseName":"test",
      "remoteHost":"localhost",
      "remotePort":"11054",
      "command":"QUERY",
      "commandText":"SELECT * FROM test1 WHERE id < 28",
      "paramList":null,
      "objectType":"TABLE",
      "objectName":"test1",
      "statementId":65469218,
      "substatementId":1,
      "exitCode":"0",
      "sessionId":"726571",
      "rowCount":2,
      "serverHost":"master",
      "serverType":"MySQL",
      "serviceName":"Amazon Aurora MySQL",
      "serverVersion":"MySQL 5.7.12",
      "startTime":"2020-05-22 18:29:57.986364+00",
      "endTime":"2020-05-22 18:29:57.986467+00",
      "transactionId":"0",
      "dbProtocol":"MySQL",
      "netProtocol":"TCP",
      "errorMessage":"",
      "class":"MAIN"
    }
  ]
}
```

The following example shows the corresponding event with a `class` value of AUX.

```
{
  "type":"DatabaseActivityMonitoringRecord",
  "instanceId":"db-some_id",
  "databaseActivityEventList":[
    {
      "logTime":"2020-05-22 18:29:57.986399+00",
      "type":"record",
      "clientApplication":null,
      "pid":2830,
      "dbUserName":"master",
      "databaseName":"test",
```

```
      "remoteHost":"localhost",
      "remotePort":"11054",
      "command":"READ",
      "commandText":"test1",
      "paramList":null,
      "objectType":"TABLE",
      "objectName":"test1",
      "statementId":65469218,
      "substatementId":2,
      "exitCode":"",
      "sessionId":"726571",
      "rowCount":0,
      "serverHost":"master",
      "serverType":"MySQL",
      "serviceName":"Amazon Aurora MySQL",
      "serverVersion":"MySQL 5.7.12",
      "startTime":"2020-05-22 18:29:57.986364+00",
      "endTime":"2020-05-22 18:29:57.986399+00",
      "transactionId":"0",
      "dbProtocol":"MySQL",
      "netProtocol":"TCP",
      "errorMessage":"",
      "class":"AUX"
    }
  ]
}
```

DatabaseActivityMonitoringRecords JSON object

The database activity event records are in a JSON object that contains the following information.

JSON Field	Data Type	Description
`type`	string	The type of JSON record. The value is `DatabaseActivityMonitoringRecords` .
`version`	string	The version of the database activity monitoring records.

JSON Field	Data Type	Description
		The version of the generated database activity records depends on the engine version of the DB cluster: • Version 1.1 database activity records are generated for Aurora PostgreSQL DB clusters running the engine versions 10.10 and later minor versions and engine versions 11.5 and later. • Version 1.0 database activity records are generated for Aurora PostgreSQL DB clusters running the engine versions 10.7 and 11.4. All of the following fields are in both version 1.0 and version 1.1 except where specifically noted.
databaseActivityEvents	string	A JSON object that contains the activity events.
key	string	An encryption key that you use to decrypt the databaseActivityEventList JSON array

databaseActivityEvents JSON Object

The `databaseActivityEvents` JSON object contains the following information.

Top-level fields in JSON record

Each event in the audit log is wrapped inside a record in JSON format. This record contains the following fields.

type

This field always has the value `DatabaseActivityMonitoringRecords`.

version

This field represents the version of the database activity stream data protocol or contract. It defines which fields are available.

Version 1.0 represents the original data activity streams support for Aurora PostgreSQL versions 10.7 and 11.4. Version 1.1 represents the data activity streams support for Aurora PostgreSQL versions 10.10 and higher and Aurora PostgreSQL 11.5 and higher. Version 1.1 includes the additional fields `errorMessage` and `startTime`. Version 1.2 represents the data activity streams support for Aurora MySQL 2.08 and higher. Version 1.2 includes the additional fields `endTime` and `transactionId`.

databaseActivityEvents

An encrypted string representing one or more activity events. It's represented as a base64 byte array. When you decrypt the string, the result is a record in JSON format with fields as shown in the examples in this section.

key

The encrypted data key used to encrypt the `databaseActivityEvents` string. This is the same Amazon KMS key that you provided when you started the database activity stream.

The following example shows the format of this record.

```
{
  "type":"DatabaseActivityMonitoringRecords",
  "version":"1.1",
  "databaseActivityEvents":"encrypted audit records",
  "key":"encrypted key"
}
```

Take the following steps to decrypt the contents of the `databaseActivityEvents` field:

1. Decrypt the value in the `key` JSON field using the KMS key you provided when starting database activity stream. Doing so returns the data encryption key in clear text.
2. Base64-decode the value in the `databaseActivityEvents` JSON field to obtain the ciphertext, in binary format, of the audit payload.
3. Decrypt the binary ciphertext with the data encryption key that you decoded in the first step.
4. Decompress the decrypted payload.

- The encrypted payload is in the `databaseActivityEvents` field.
- The `databaseActivityEventList` field contains an array of audit records. The `type` fields in the array can be `record` or `heartbeat`.

The audit log activity event record is a JSON object that contains the following information.

JSON Field	Data Type	Description
`type`	string	The type of JSON record. The value is `DatabaseActivityMonitoringRecord`.
`clusterId`	string	The DB cluster resource identifier. It corresponds to the DB cluster attribute `DbClusterResourceId`.
`instanceId`	string	The DB instance resource identifier. It corresponds to the DB instance attribute `DbiResourceId`.
databaseActivityEventList JSON array	string	An array of activity audit records or heartbeat messages.

databaseActivityEventList JSON array for database activity streams

The audit log payload is an encrypted `databaseActivityEventList` JSON array. The following tables lists alphabetically the fields for each activity event in the decrypted `DatabaseActivityEventList` array of an audit log. The fields differ depending on whether you use Aurora PostgreSQL or Aurora MySQL. Consult the table that applies to your database engine.

> **Important**
>
> The event structure is subject to change. Aurora might add new fields to activity events in the future. In applications that parse the JSON data, make sure that your code can ignore or take appropriate actions for unknown field names.

databaseActivityEventList fields for Aurora PostgreSQL

The following are `databaseActivityEventList` fields for Aurora PostgreSQL.

Field	Data Type	Description
`class`	string	The class of activity event. Valid values for Aurora PostgreSQL are the following: • `ALL` • `CONNECT` – A connect or disconnect event. • `DDL` – A DDL statement that is not included in the list of statements for the `ROLE` class. • `FUNCTION` – A function call or a `DO` block. • `MISC` – A miscellaneous command such as `DISCARD`, `FETCH`, `CHECKPOINT` , or `VACUUM`. • `NONE` • `READ` – A `SELECT` or `COPY` statement when the source is a relation or a query. • `ROLE` – A statement related to roles and privileges including `GRANT`, `REVOKE`, and `CREATE/ALTER/DROP ROLE`. • `WRITE` – An `INSERT`, `UPDATE`, `DELETE`, `TRUNCATE`, or `COPY` statement when the destination is a relation.
`clientApplication`	string	The application the client used to connect as reported by the client. The client doesn't have to provide this informati on, so the value can be null.
`command`	string	The name of the SQL command without any command details.
`commandText`	string	The actual SQL statement passed in by the user. For Aurora PostgreSQL, the value is identical to the original SQL statement. This field is used for all types of records except for connect or disconnect records, in which case the value is null.

Field	Data Type	Description
		Important The full SQL text of each statement is visible in the activity stream audit log, including any sensitive data. However, database user passwords are redacted if Aurora can determine them from the context, such as in the following SQL statement. `ALTER ROLE role-name WITH password`
`databaseName`	string	The database to which the user connected.
`dbProtocol`	string	The database protocol, for example `Postgres 3.0`.
`dbUserName`	string	The database user with which the client authenticated.
`errorMessage` (version 1.1 database activity records only)	string	If there was any error, this field is populated with the error message that would've been generated by the DB server. The `errorMessage` value is null for normal statements that didn't result in an error. An error is defined as any activity that would produce a client-visible PostgreSQL error log event at a severity level of ERROR or greater. For more information, see PostgreSQL Message Severity Levels. For example, syntax errors and query cancellations generate an error message. Internal PostgreSQL server errors such as background checkpointer process errors do not generate an error message. However, records for such events are still emitted regardless of the setting of the log severity level. This prevents attackers from turning off logging to attempt avoiding detection. See also the `exitCode` field.

Field	Data Type	Description
`exitCode`	int	A value used for a session exit record. On a clean exit, this contains the exit code. An exit code can't always be obtained in some failure scenarios. Examples are if PostgreSQL does an `exit()` or if an operator performs a command such as `kill -9`. If there was any error, the `exitCode` field shows the SQL error code, `SQLSTATE`, as listed in PostgreSQL Error Codes. See also the `errorMessage` field.
`logTime`	string	A timestamp as recorded in the auditing code path. This represents the SQL statement execution end time. See also the `startTime` field.
`netProtocol`	string	The network communication protocol.
`objectName`	string	The name of the database object if the SQL statement is operating on one. This field is used only where the SQL statement operates on a database object. If the SQL statement is not operating on an object, this value is null.

Field	Data Type	Description
objectType	string	The database object type such as table, index, view, and so on. This field is used only where the SQL statement operates on a database object. If the SQL statement is not operating on an object, this value is null. Valid values include the following: • COMPOSITE TYPE • FOREIGN TABLE • FUNCTION • INDEX • MATERIALIZED VIEW • SEQUENCE • TABLE • TOAST TABLE • VIEW • UNKNOWN
paramList	string	An array of comma-separated parameters passed to the SQL statement. If the SQL statement has no parameters, this value is an empty array.
pid	int	The process ID of the backend process that is allocated for serving the client connection.
remoteHost	string	Either the client IP address or hostname. For Aurora PostgreSQL, which one is used depends on the database's log_hostname parameter setting. The remoteHost value also includes [local] and localhost which indicate activity from the rdsadmin user.
remotePort	string	The client port number.

Field	Data Type	Description
rowCount	int	The number of table rows affected or retrieved by the SQL statement. This field is used only for SQL statements that are data manipulation language (DML) statements. If the SQL statement is not a DML statement, this value is null.
serverHost	string	The database server host IP address. The serverHost value also includes [local] and localhost which indicate activity from the rdsadmin user.
serverType	string	The database server type, for example PostgreSQL .
serverVersion	string	The database server version, for example 2.3.1 for Aurora PostgreSQL.
serviceName	string	The name of the service, for example Amazon Aurora PostgreSQL-Compatible edition .
sessionId	int	A pseudo-unique session identifier.
sessionId	int	A pseudo-unique session identifier.
startTime (version 1.1 database activity records only)	string	The time when execution began for the SQL statement. To calculate the approximate execution time of the SQL statement, use logTime - startTime . See also the logTime field.
statementId	int	An identifier for the client's SQL statement. The counter is at the session level and increments with each SQL statement entered by the client.
substatementId	int	An identifier for a SQL substatement. This value counts the contained substatements for each SQL statement identified by the statementId field.
type	string	The event type. Valid values are record or heartbeat .

databaseActivityEventList fields for Aurora MySQL

The following are `databaseActivityEventList` fields for Aurora MySQL.

Field	Data Type	Description
`class`	string	The class of activity event. Valid values for Aurora MySQL are the following: • `MAIN` – The primary event representing a SQL statement. • `AUX` – A supplemental event containing additional details. For example, a statement that renames an object might have an event with class `AUX` that reflects the new name. To find `MAIN` and `AUX` events corresponding to the same statement, check for different events that have the same values for the `pid` field and for the `statementId` field.
`clientApplication`	string	The application the client used to connect as reported by the client. The client doesn't have to provide this information, so the value can be null.
`command`	string	The general category of the SQL statement. The values for this field depend on the value of `class`. The values when `class` is `MAIN` include the following: • `CONNECT` – When a client session is connected. • `QUERY` – A SQL statement. Accompanied by one or more events with a `class` value of `AUX`. • `DISCONNECT` – When a client session is disconnected. • `FAILED_CONNECT` – When a client attempts to connect but isn't able to. • `CHANGEUSER` – A state change that's part of the MySQL network protocol, not from a statement that you issue. The values when `class` is `AUX` include the following:

Field	Data Type	Description
		• READ – A SELECT or COPY statement when the source is a relation or a query. • WRITE – An INSERT, UPDATE, DELETE, TRUNCATE, or COPY statement when the destination is a relation. • DROP – Deleting an object. • CREATE – Creating an object. • RENAME – Renaming an object. • ALTER – Changing the properties of an object.

Field	Data Type	Description
commandText	string	For events with a class value of MAIN, this field represents the actual SQL statement passed in by the user. This field is used for all types of records except for connect or disconnect records, in which case the value is null. For events with a class value of AUX, this field contains supplemental information about the objects involved in the event. For Aurora MySQL, characters such as quotation marks are preceded by a backslash, representing an escape character. **Important** The full SQL text of each statement is visible in the audit log, including any sensitive data. However, database user passwords are redacted if Aurora can determine them from the context, such as in the following SQL statement. `mysql> SET PASSWORD = 'my-password ';` **Note** Specify a password other than the prompt shown here as a security best practice.
databaseName	string	The database to which the user connected.
dbProtocol	string	The database protocol. Currently, this value is always MySQL for Aurora MySQL.
dbUserName	string	The database user with which the client authenticated.

Field	Data Type	Description
`endTime` (version 1.2 database activity records only)	string	The time when execution ended for the SQL statement. It is represented in Coordinated Universal Time (UTC) format. To calculate the execution time of the SQL statement, use `endTime - startTime` . See also the `startTime` field.
`errorMessage` (version 1.1 database activity records only)	string	If there was any error, this field is populated with the error message that would've been generated by the DB server. The `errorMessage` value is null for normal statements that didn't result in an error. An error is defined as any activity that would produce a client-visible MySQL error log event at a severity level of ERROR or greater. For more information, see The Error Log in the *MySQL Reference Manual*. For example, syntax errors and query cancellations generate an error message. Internal MySQL server errors such as background checkpoin ter process errors do not generate an error message. However, records for such events are still emitted regardles s of the setting of the log severity level. This prevents attackers from turning off logging to attempt avoiding detection. See also the `exitCode` field.
`exitCode`	int	A value used for a session exit record. On a clean exit, this contains the exit code. An exit code can't always be obtained in some failure scenarios. In such cases, this value might be zero or might be blank.
`logTime`	string	A timestamp as recorded in the auditing code path. It is represented in Coordinated Universal Time (UTC) format. For the most accurate way to calculate statement duration, see the `startTime` and `endTime` fields.

Field	Data Type	Description
`netProtocol`	string	The network communication protocol. Currently, this value is always `TCP` for Aurora MySQL.
`objectName`	string	The name of the database object if the SQL statement is operating on one. This field is used only where the SQL statement operates on a database object. If the SQL statement isn't operating on an object, this value is blank. To construct the fully qualified name of the object, combine `databaseName` and `objectName` . If the query involves multiple objects, this field can be a comma-separated list of names.
`objectType`	string	The database object type such as table, index, and so on. This field is used only where the SQL statement operates on a database object. If the SQL statement is not operating on an object, this value is null. Valid values for Aurora MySQL include the following: • `INDEX` • `TABLE` • `UNKNOWN`
`paramList`	string	This field isn't used for Aurora MySQL and is always null.
`pid`	int	The process ID of the backend process that is allocated for serving the client connection. When the database server is restarted, the `pid` changes and the counter for the `statementId` field starts over.
`remoteHost`	string	Either the IP address or hostname of the client that issued the SQL statement. For Aurora MySQL, which one is used depends on the database's `skip_name_resolve` parameter setting. The value `localhost` indicates activity from the `rdsadmin` special user.

Field	Data Type	Description
remotePort	string	The client port number.
rowCount	int	The number of rows returned by the SQL statement. For example, if a SELECT statement returns 10 rows, rowCount is 10. For INSERT or UPDATE statements, rowCount is 0.
serverHost	string	The database server instance identifier.
serverType	string	The database server type, for example MySQL.
serverVersion	string	The database server version. Currently, this value is always MySQL 5.7.12 for Aurora MySQL.
serviceName	string	The name of the service. Currently, this value is always Amazon Aurora MySQL for Aurora MySQL.
sessionId	int	A pseudo-unique session identifier.
startTime (version 1.1 database activity records only)	string	The time when execution began for the SQL statement. It is represented in Coordinated Universal Time (UTC) format. To calculate the execution time of the SQL statement, use endTime - startTime . See also the endTime field.
statementId	int	An identifier for the client's SQL statement. The counter increments with each SQL statement entered by the client. The counter is reset when the DB instance is restarted.
substatementId	int	An identifier for a SQL substatement. This value is 1 for events with class MAIN and 2 for events with class AUX. Use the statementId field to identify all the events generated by the same statement.

Field	Data Type	Description
`transactionId` (version 1.2 database activity records only)	int	An identifier for a transaction.
`type`	string	The event type. Valid values are `record` or `heartbeat` .

Processing a database activity stream using the Amazon SDK

You can programmatically process an activity stream by using the Amazon SDK. The following are fully functioning Java and Python examples of how you might process the Kinesis data stream.

Java

```
import java.io.ByteArrayInputStream;
import java.io.ByteArrayOutputStream;
import java.io.IOException;
import java.net.InetAddress;
import java.nio.ByteBuffer;
import java.nio.charset.StandardCharsets;
import java.security.NoSuchAlgorithmException;
import java.security.NoSuchProviderException;
import java.security.Security;
import java.util.HashMap;
import java.util.List;
import java.util.Map;
import java.util.UUID;
import java.util.zip.GZIPInputStream;

import javax.crypto.Cipher;
import javax.crypto.NoSuchPaddingException;
import javax.crypto.spec.SecretKeySpec;

import com.amazonaws.auth.AWSStaticCredentialsProvider;
import com.amazonaws.auth.BasicAWSCredentials;
import com.amazonaws.encryptionsdk.AwsCrypto;
import com.amazonaws.encryptionsdk.CryptoInputStream;
```

```
import com.amazonaws.encryptionsdk.jce.JceMasterKey;
import
 com.amazonaws.services.kinesis.clientlibrary.exceptions.InvalidStateException;
import com.amazonaws.services.kinesis.clientlibrary.exceptions.ShutdownException;
import com.amazonaws.services.kinesis.clientlibrary.exceptions.ThrottlingException;
import com.amazonaws.services.kinesis.clientlibrary.interfaces.IRecordProcessor;
import
 com.amazonaws.services.kinesis.clientlibrary.interfaces.IRecordProcessorCheckpointer;
import
 com.amazonaws.services.kinesis.clientlibrary.interfaces.IRecordProcessorFactory;
import
 com.amazonaws.services.kinesis.clientlibrary.lib.worker.InitialPositionInStream;
import
 com.amazonaws.services.kinesis.clientlibrary.lib.worker.KinesisClientLibConfiguration;
import com.amazonaws.services.kinesis.clientlibrary.lib.worker.ShutdownReason;
import com.amazonaws.services.kinesis.clientlibrary.lib.worker.Worker;
import com.amazonaws.services.kinesis.clientlibrary.lib.worker.Worker.Builder;
import com.amazonaws.services.kinesis.model.Record;
import com.amazonaws.services.kms.AWSKMS;
import com.amazonaws.services.kms.AWSKMSClientBuilder;
import com.amazonaws.services.kms.model.DecryptRequest;
import com.amazonaws.services.kms.model.DecryptResult;
import com.amazonaws.util.Base64;
import com.amazonaws.util.IOUtils;
import com.google.gson.Gson;
import com.google.gson.GsonBuilder;
import com.google.gson.annotations.SerializedName;
import org.bouncycastle.jce.provider.BouncyCastleProvider;

public class DemoConsumer {

    private static final String STREAM_NAME = "aws-rds-das-[cluster-external-
resource-id]";
    private static final String APPLICATION_NAME = "AnyApplication"; //unique
 application name for dynamo table generation that holds kinesis shard tracking
    private static final String AWS_ACCESS_KEY =
 "[AWS_ACCESS_KEY_TO_ACCESS_KINESIS]";
    private static final String AWS_SECRET_KEY =
 "[AWS_SECRET_KEY_TO_ACCESS_KINESIS]";
    private static final String DBC_RESOURCE_ID = "[cluster-external-resource-id]";
    private static final String REGION_NAME = "[region-name]"; //us-east-1, us-
east-2...
    private static final BasicAWSCredentials CREDENTIALS = new
 BasicAWSCredentials(AWS_ACCESS_KEY, AWS_SECRET_KEY);
```

```
   private static final AWSStaticCredentialsProvider CREDENTIALS_PROVIDER = new
AWSStaticCredentialsProvider(CREDENTIALS);

   private static final AwsCrypto CRYPTO = new AwsCrypto();
   private static final AWSKMS KMS = AWSKMSClientBuilder.standard()
           .withRegion(REGION_NAME)
           .withCredentials(CREDENTIALS_PROVIDER).build();

   class Activity {
       String type;
       String version;
       String databaseActivityEvents;
       String key;
   }

   class ActivityEvent {
       @SerializedName("class") String _class;
       String clientApplication;
       String command;
       String commandText;
       String databaseName;
       String dbProtocol;
       String dbUserName;
       String endTime;
       String errorMessage;
       String exitCode;
       String logTime;
       String netProtocol;
       String objectName;
       String objectType;
       List<String> paramList;
       String pid;
       String remoteHost;
       String remotePort;
       String rowCount;
       String serverHost;
       String serverType;
       String serverVersion;
       String serviceName;
       String sessionId;
       String startTime;
       String statementId;
       String substatementId;
       String transactionId;
```

```
        String type;
    }

    class ActivityRecords {
        String type;
        String clusterId;
        String instanceId;
        List<ActivityEvent> databaseActivityEventList;
    }

    static class RecordProcessorFactory implements IRecordProcessorFactory {
        @Override
        public IRecordProcessor createProcessor() {
            return new RecordProcessor();
        }
    }

    static class RecordProcessor implements IRecordProcessor {

        private static final long BACKOFF_TIME_IN_MILLIS = 3000L;
        private static final int PROCESSING_RETRIES_MAX = 10;
        private static final long CHECKPOINT_INTERVAL_MILLIS = 60000L;
        private static final Gson GSON = new
GsonBuilder().serializeNulls().create();

        private static final Cipher CIPHER;
        static {
            Security.insertProviderAt(new BouncyCastleProvider(), 1);
            try {
                CIPHER = Cipher.getInstance("AES/GCM/NoPadding", "BC");
            } catch (NoSuchAlgorithmException | NoSuchPaddingException |
NoSuchProviderException e) {
                throw new ExceptionInInitializerError(e);
            }
        }

        private long nextCheckpointTimeInMillis;

        @Override
        public void initialize(String shardId) {
        }

        @Override
```

```
        public void processRecords(final List<Record> records, final
IRecordProcessorCheckpointer checkpointer) {
            for (final Record record : records) {
                processSingleBlob(record.getData());
            }

            if (System.currentTimeMillis() > nextCheckpointTimeInMillis) {
                checkpoint(checkpointer);
                nextCheckpointTimeInMillis = System.currentTimeMillis() +
CHECKPOINT_INTERVAL_MILLIS;
            }
        }

        @Override
        public void shutdown(IRecordProcessorCheckpointer checkpointer,
ShutdownReason reason) {
            if (reason == ShutdownReason.TERMINATE) {
                checkpoint(checkpointer);
            }
        }

        private void processSingleBlob(final ByteBuffer bytes) {
            try {
                // JSON $Activity
                final Activity activity = GSON.fromJson(new String(bytes.array(),
StandardCharsets.UTF_8), Activity.class);

                // Base64.Decode
                final byte[] decoded =
Base64.decode(activity.databaseActivityEvents);
                final byte[] decodedDataKey = Base64.decode(activity.key);

                Map<String, String> context = new HashMap<>();
                context.put("aws:rds:dbc-id", DBC_RESOURCE_ID);

                // Decrypt
                final DecryptRequest decryptRequest = new DecryptRequest()

.withCiphertextBlob(ByteBuffer.wrap(decodedDataKey)).withEncryptionContext(context);
                final DecryptResult decryptResult = KMS.decrypt(decryptRequest);
                final byte[] decrypted = decrypt(decoded,
getByteArray(decryptResult.getPlaintext()));

                // GZip Decompress
```

```
                final byte[] decompressed = decompress(decrypted);
                // JSON $ActivityRecords
                final ActivityRecords activityRecords = GSON.fromJson(new
String(decompressed, StandardCharsets.UTF_8), ActivityRecords.class);

                // Iterate throught $ActivityEvents
                for (final ActivityEvent event :
activityRecords.databaseActivityEventList) {
                    System.out.println(GSON.toJson(event));
                }
            } catch (Exception e) {
                // Handle error.
                e.printStackTrace();
            }
        }

        private static byte[] decompress(final byte[] src) throws IOException {
            ByteArrayInputStream byteArrayInputStream = new
ByteArrayInputStream(src);
            GZIPInputStream gzipInputStream = new
GZIPInputStream(byteArrayInputStream);
            return IOUtils.toByteArray(gzipInputStream);
        }

        private void checkpoint(IRecordProcessorCheckpointer checkpointer) {
            for (int i = 0; i < PROCESSING_RETRIES_MAX; i++) {
                try {
                    checkpointer.checkpoint();
                    break;
                } catch (ShutdownException se) {
                    // Ignore checkpoint if the processor instance has been shutdown
(fail over).
                    System.out.println("Caught shutdown exception, skipping
checkpoint." + se);
                    break;
                } catch (ThrottlingException e) {
                    // Backoff and re-attempt checkpoint upon transient failures
                    if (i >= (PROCESSING_RETRIES_MAX - 1)) {
                        System.out.println("Checkpoint failed after " + (i + 1) +
"attempts." + e);
                        break;
                    } else {
                        System.out.println("Transient issue when checkpointing -
attempt " + (i + 1) + " of " + PROCESSING_RETRIES_MAX + e);
```

```
                    }
                } catch (InvalidStateException e) {
                    // This indicates an issue with the DynamoDB table (check for
table, provisioned IOPS).
                    System.out.println("Cannot save checkpoint to the DynamoDB table
used by the Amazon Kinesis Client Library." + e);
                    break;
                }
                try {
                    Thread.sleep(BACKOFF_TIME_IN_MILLIS);
                } catch (InterruptedException e) {
                    System.out.println("Interrupted sleep" + e);
                }
            }
        }
    }

    private static byte[] decrypt(final byte[] decoded, final byte[] decodedDataKey)
throws IOException {
        // Create a JCE master key provider using the random key and an AES-GCM
encryption algorithm
        final JceMasterKey masterKey = JceMasterKey.getInstance(new
SecretKeySpec(decodedDataKey, "AES"),
                "BC", "DataKey", "AES/GCM/NoPadding");
        try (final CryptoInputStream<JceMasterKey> decryptingStream =
CRYPTO.createDecryptingStream(masterKey, new ByteArrayInputStream(decoded));
             final ByteArrayOutputStream out = new ByteArrayOutputStream()) {
            IOUtils.copy(decryptingStream, out);
            return out.toByteArray();
        }
    }

    public static void main(String[] args) throws Exception {
        final String workerId = InetAddress.getLocalHost().getCanonicalHostName() +
":" + UUID.randomUUID();
        final KinesisClientLibConfiguration kinesisClientLibConfiguration =
                new KinesisClientLibConfiguration(APPLICATION_NAME, STREAM_NAME,
CREDENTIALS_PROVIDER, workerId);

kinesisClientLibConfiguration.withInitialPositionInStream(InitialPositionInStream.LATEST);
        kinesisClientLibConfiguration.withRegionName(REGION_NAME);
        final Worker worker = new Builder()
                .recordProcessorFactory(new RecordProcessorFactory())
                .config(kinesisClientLibConfiguration)
```

```
                .build();

        System.out.printf("Running %s to process stream %s as worker %s...\n",
 APPLICATION_NAME, STREAM_NAME, workerId);

        try {
            worker.run();
        } catch (Throwable t) {
            System.err.println("Caught throwable while processing data.");
            t.printStackTrace();
            System.exit(1);
        }
        System.exit(0);
    }

    private static byte[] getByteArray(final ByteBuffer b) {
        byte[] byteArray = new byte[b.remaining()];
        b.get(byteArray);
        return byteArray;
    }
}
```

Python

```
import base64
import json
import zlib
import aws_encryption_sdk
from aws_encryption_sdk import CommitmentPolicy
from aws_encryption_sdk.internal.crypto import WrappingKey
from aws_encryption_sdk.key_providers.raw import RawMasterKeyProvider
from aws_encryption_sdk.identifiers import WrappingAlgorithm, EncryptionKeyType
import boto3

REGION_NAME = '<region>'                    # us-east-1
RESOURCE_ID = '<external-resource-id>'      # cluster-ABCD123456
STREAM_NAME = 'aws-rds-das-' + RESOURCE_ID  # aws-rds-das-cluster-ABCD123456

enc_client =
 aws_encryption_sdk.EncryptionSDKClient(commitment_policy=CommitmentPolicy.FORBID_ENCRYPT_AL

class MyRawMasterKeyProvider(RawMasterKeyProvider):
    provider_id = "BC"
```

```
    def __new__(cls, *args, **kwargs):
        obj = super(RawMasterKeyProvider, cls).__new__(cls)
        return obj

    def __init__(self, plain_key):
        RawMasterKeyProvider.__init__(self)
        self.wrapping_key =
 WrappingKey(wrapping_algorithm=WrappingAlgorithm.AES_256_GCM_IV12_TAG16_NO_PADDING,
                                          wrapping_key=plain_key,
 wrapping_key_type=EncryptionKeyType.SYMMETRIC)

    def _get_raw_key(self, key_id):
        return self.wrapping_key


def decrypt_payload(payload, data_key):
    my_key_provider = MyRawMasterKeyProvider(data_key)
    my_key_provider.add_master_key("DataKey")
    decrypted_plaintext, header = enc_client.decrypt(
        source=payload,

 materials_manager=aws_encryption_sdk.materials_managers.default.DefaultCryptoMaterialsManag
    return decrypted_plaintext


def decrypt_decompress(payload, key):
    decrypted = decrypt_payload(payload, key)
    return zlib.decompress(decrypted, zlib.MAX_WBITS + 16)


def main():
    session = boto3.session.Session()
    kms = session.client('kms', region_name=REGION_NAME)
    kinesis = session.client('kinesis', region_name=REGION_NAME)

    response = kinesis.describe_stream(StreamName=STREAM_NAME)
    shard_iters = []
    for shard in response['StreamDescription']['Shards']:
        shard_iter_response = kinesis.get_shard_iterator(StreamName=STREAM_NAME,
 ShardId=shard['ShardId'],

 ShardIteratorType='LATEST')
        shard_iters.append(shard_iter_response['ShardIterator'])
```

```
    while len(shard_iters) > 0:
        next_shard_iters = []
        for shard_iter in shard_iters:
            response = kinesis.get_records(ShardIterator=shard_iter, Limit=10000)
            for record in response['Records']:
                record_data = record['Data']
                record_data = json.loads(record_data)
                payload_decoded =
 base64.b64decode(record_data['databaseActivityEvents'])
                data_key_decoded = base64.b64decode(record_data['key'])
                data_key_decrypt_result =
 kms.decrypt(CiphertextBlob=data_key_decoded,

 EncryptionContext={'aws:rds:dbc-id': RESOURCE_ID})
                print (decrypt_decompress(payload_decoded,
 data_key_decrypt_result['Plaintext']))
            if 'NextShardIterator' in response:
                next_shard_iters.append(response['NextShardIterator'])
        shard_iters = next_shard_iters


if __name__ == '__main__':
    main()
```

IAM policy examples for database activity streams

Any user with appropriate Amazon Identity and Access Management (IAM) role privileges for database activity streams can create, start, stop, and modify the activity stream settings for a DB cluster. These actions are included in the audit log of the stream. For best compliance practices, we recommend that you don't provide these privileges to DBAs.

You set access to database activity streams using IAM policies. For more information about Aurora authentication, see Identity and access management for Amazon Aurora. For more information about creating IAM policies, see Creating and using an IAM policy for IAM database access.

Example Policy to allow configuring database activity streams

To give users fine-grained access to modify activity streams, use the service-specific operation context keys `rds:StartActivityStream` and `rds:StopActivityStream` in an IAM policy. The following IAM policy example allows a user or role to configure activity streams.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "ConfigureActivityStreams",
            "Effect": "Allow",
            "Action": [
                "rds:StartActivityStream",
                "rds:StopActivityStream"
            ],
            "Resource": "*"
        }
    ]
}
```

Example Policy to allow starting database activity streams

The following IAM policy example allows a user or role to start activity streams.

JSON

```
{
    "Version":"2012-10-17",
    "Statement":[
        {
            "Sid":"AllowStartActivityStreams",
            "Effect":"Allow",
            "Action":"rds:StartActivityStream",
            "Resource":"*"
        }
    ]
}
```

Example Policy to allow stopping database activity streams

The following IAM policy example allows a user or role to stop activity streams.

JSON

```
{
    "Version":"2012-10-17",
    "Statement":[
        {
            "Sid":"AllowStopActivityStreams",
            "Effect":"Allow",
            "Action":"rds:StopActivityStream",
            "Resource":"*"
        }
     ]
}
```

Example Policy to deny starting database activity streams

The following IAM policy example prevents a user or role from starting activity streams.

JSON

```
{
    "Version":"2012-10-17",
    "Statement":[
        {
            "Sid":"DenyStartActivityStreams",
            "Effect":"Deny",
            "Action":"rds:StartActivityStream",
            "Resource":"*"
        }
     ]
}
```

Example Policy to deny stopping database activity streams

The following IAM policy example prevents a user or role from stopping activity streams.

JSON

```
{
```

```
    "Version":"2012-10-17",
    "Statement":[
        {
            "Sid":"DenyStopActivityStreams",
            "Effect":"Deny",
            "Action":"rds:StopActivityStream",
            "Resource":"*"
        }
    ]
}
```

Monitoring threats with Amazon GuardDuty RDS Protectionfor Amazon Aurora

Amazon GuardDuty is a threat detection service that helps protect your accounts, containers, workloads, and the data within your Amazon environment. Using machine learning (ML) models, and anomaly and threat detection capabilities, GuardDuty continuously monitors different log sources and runtime activity to identify and prioritize potential security risks and malicious activities in your environment.

GuardDuty RDS Protection analyzes and profiles login events for potential access threats to your Amazon Aurora databases. When you turn on RDS Protection, GuardDuty consumes RDS login events from your Aurora databases. RDS Protection monitors these events and profiles them for potential insider threats or external actors.

For more information about enabling GuardDuty RDS Protection, see GuardDuty RDS Protection in the *Amazon GuardDuty User Guide*.

When RDS Protection detects a potential threat, such as an unusual pattern in successful or failed login attempts, GuardDuty generates a new finding with details about the potentially compromised database. You can view the finding details in the finding summary section in the Amazon GuardDuty console. The finding details vary based on the finding type. The primary details, resource type and resource role, determine the kind of information available for any finding. For more information about the commonly available details for findings and the finding types, see Finding details and GuardDuty RDS Protection finding types respectively in the *Amazon GuardDuty User Guide*.

You can turn the RDS Protection feature on or off for any Amazon Web Services account in any Amazon Web Services Region where this feature is available. When RDS Protection isn't enabled, GuardDuty doesn't detect potentially compromised Aurora databases or provide details of the compromise.

An existing GuardDuty account can enable RDS Protection with a 30-day trial period. For a new GuardDuty account, RDS Protection is already enabled and included in the 30-day free trial period. For more information, see Estimating GuardDuty cost in the *Amazon GuardDuty User Guide*.

For information about the Amazon Web Services Regions where GuardDuty doesn't yet support RDS Protection, see Region-specific feature availability in the *Amazon GuardDuty User Guide*.

For information about the Aurora database versions that GuardDuty RDS Protection supports, see Supported Amazon Aurora, Amazon RDS, and Aurora Limitless databases in the *Amazon GuardDuty User Guide*.

Working with Amazon Aurora MySQL

Amazon Aurora MySQL is a fully managed, MySQL-compatible, relational database engine that combines the speed and reliability of high-end commercial databases with the simplicity and cost-effectiveness of open-source databases. Aurora MySQL is a drop-in replacement for MySQL and makes it simple and cost-effective to set up, operate, and scale your new and existing MySQL deployments, thus freeing you to focus on your business and applications. Amazon RDS provides administration for Aurora by handling routine database tasks such as provisioning, patching, backup, recovery, failure detection, and repair. Amazon RDS also provides push-button migration tools to convert your existing Amazon RDS for MySQL applications to Aurora MySQL.

Topics

- Overview of Amazon Aurora MySQL
- Security with Amazon Aurora MySQL
- Updating applications to connect to Aurora MySQL DB clusters using new TLS certificates
- Using Kerberos authentication for Aurora MySQL
- Migrating data to an Amazon Aurora MySQL DB cluster
- Managing Amazon Aurora MySQL
- Tuning Aurora MySQL
- Parallel query for Amazon Aurora MySQL
- Using Advanced Auditing with an Amazon Aurora MySQL DB cluster
- Replication with Amazon Aurora MySQL
- Using local write forwarding in an Amazon Aurora MySQL DB cluster
- Integrating Amazon Aurora MySQL with other Amazon services
- Amazon Aurora MySQL lab mode
- Best practices with Amazon Aurora MySQL
- Troubleshooting Amazon Aurora MySQL database performance
- Amazon Aurora MySQL reference
- Database engine updates for Amazon Aurora MySQL

Overview of Amazon Aurora MySQL

The following sections provide an overview of Amazon Aurora MySQL.

Topics

- Amazon Aurora MySQL performance enhancements
- Amazon Aurora MySQL and spatial data
- Aurora MySQL version 8.4 compatible with MySQL 8.4
- Aurora MySQL version 3 compatible with MySQL 8.0
- Aurora MySQL version 2 compatible with MySQL 5.7

Amazon Aurora MySQL performance enhancements

Amazon Aurora includes performance enhancements to support the diverse needs of high-end commercial databases.

Amazon Aurora MySQL and spatial data

The following list summarizes the main Aurora MySQL spatial features and explains how they correspond to spatial features in MySQL:

- Aurora MySQL version 2 supports the same spatial data types and spatial relation functions as MySQL 5.7. For more information about these data types and functions, see Spatial Data Types and Spatial Relation Functions in the MySQL 5.7 documentation.
- Aurora MySQL version 3 supports the same spatial data types and spatial relation functions as MySQL 8.0. For more information about these data types and functions, see Spatial Data Types and Spatial Relation Functions in the MySQL 8.0 documentation.
- Aurora MySQL version 8.4 supports the same spatial data types and spatial relation functions as MySQL 8.4. For more information about these data types and functions, see Spatial Data Types and Spatial Relation Functions in the MySQL 8.4 documentation.
- Aurora MySQL supports spatial indexing on InnoDB tables. Spatial indexing improves query performance on large datasets for queries on spatial data. In MySQL, spatial indexing for InnoDB tables is available in MySQL 5.7 and 8.0.

Aurora MySQL uses a different spatial indexing strategy from MySQL for high performance with spatial queries. The Aurora spatial index implementation uses a space-filling curve on a B-tree, which is intended to provide higher performance for spatial range scans than an R-tree.

> **Note**
>
> In Aurora MySQL, a transaction on a table with a spatial index defined on a column with a spatial reference identifier (SRID) can't insert into an area selected for update by another transaction.

The following data definition language (DDL) statements are supported for creating indexes on columns that use spatial data types.

CREATE TABLE

You can use the `SPATIAL INDEX` keywords in a `CREATE TABLE` statement to add a spatial index to a column in a new table. Following is an example.

```
CREATE TABLE test (shape POLYGON NOT NULL, SPATIAL INDEX(shape));
```

ALTER TABLE

You can use the `SPATIAL INDEX` keywords in an `ALTER TABLE` statement to add a spatial index to a column in an existing table. Following is an example.

```
ALTER TABLE test ADD SPATIAL INDEX(shape);
```

CREATE INDEX

You can use the `SPATIAL` keyword in a `CREATE INDEX` statement to add a spatial index to a column in an existing table. Following is an example.

```
CREATE SPATIAL INDEX shape_index ON test (shape);
```

Aurora MySQL version 8.4 compatible with MySQL 8.4

Aurora MySQL version 8.4 is the latest major version of Amazon Aurora MySQL-Compatible Edition, compatible with MySQL 8.4 Community Edition. You can use Aurora MySQL version 8.4 to get the latest MySQL-compatible features, performance enhancements, and bug fixes.

Aurora MySQL version 8.4 supports the same Aurora features as the latest Aurora MySQL version 3 releases, with the following exceptions:

- Fast insert is not available in Aurora MySQL version 8.4.

Aurora MySQL version 8.4 uses a simplified version numbering scheme. The version number follows a *major-version*.*minor-version* format, where the major version (such as 8.4) represents MySQL compatibility and the minor version represents the feature and bug fix release. For example, 8.4.7 is the first minor version in the 8.4 major version family. For more information, see Checking Aurora MySQL version numbers.

Topics

- Features from MySQL 8.4 Community Edition
- Features removed in MySQL 8.4
- Security enhancements in Aurora MySQL version 8.4
- Release notes for Aurora MySQL version 8.4
- Upgrading to Aurora MySQL version 8.4
- Post-upgrade cleanup for Aurora MySQL version 8.4
- Comparing Aurora MySQL version 3 and Aurora MySQL version 8.4
- Comparing Aurora MySQL version 8.4 and MySQL 8.4 Community Edition
- Security considerations for upgrading from Aurora MySQL version 3 to version 8.4

Features from MySQL 8.4 Community Edition

Aurora MySQL version 8.4 is compatible with MySQL 8.4 Community Edition. MySQL 8.4 is a Long-Term Support (LTS) release that builds on MySQL 8.0 with the following key changes:

- The `mysql_native_password` authentication plugin is enabled by default but the setting is not modifiable. The default `authentication_policy` is `*:caching_sha2_password`, so

new users are created with `caching_sha2_password` by default. Users authenticating with `mysql_native_password` will continue working after upgrading, but we recommend migrating to `caching_sha2_password`.

- Non-inclusive replication terminology is enforced. Older SQL statements such as `SHOW SLAVE STATUS`, `CHANGE MASTER TO`, and `START SLAVE` now return syntax errors. Use the replacement statements such as `SHOW REPLICA STATUS`, `CHANGE REPLICATION SOURCE TO`, and `START REPLICA` instead.
- Hash table optimization for `EXCEPT` and `INTERSECT` set operations, improving performance for these queries.
- In Aurora MySQL version 8.4.7 and higher, automatic histogram updates are disabled. If you specify `AUTO UPDATE` when creating or altering a histogram, Aurora MySQL issues a warning and treats the histogram as `MANUAL UPDATE`. Continue to refresh histogram statistics by running `ANALYZE TABLE` *`table_name`* `UPDATE HISTOGRAM ON` *`column_name`*.
- Several parameters now have dynamic defaults that scale based on instance memory and CPU cores, including `temptable_max_ram` (now 3% of total memory) and `innodb_buffer_pool_instances`.
- The `SET_USER_ID` privilege is replaced by two new privileges: `SET_ANY_DEFINER` and `ALLOW_NONEXISTENT_DEFINER`. Two additional new privileges are also introduced: `FLUSH_PRIVILEGES` and `OPTIMIZE_LOCAL_TABLE`.
- Foreign keys referencing non-unique keys are now blocked by default, controlled by the `restrict_fk_on_non_standard_key` parameter.

For the full list of changes in MySQL 8.4, see What Is New in MySQL 8.4 in the *MySQL Reference Manual*.

Important

Before upgrading to Aurora MySQL version 8.4, review your database users and ensure they are using the `caching_sha2_password` authentication plugin. In Aurora MySQL version 8.4, the `mysql_native_password` plugin is enabled by default and this setting is not modifiable by customers. When you upgrade from version 3, existing accounts that use `mysql_native_password` continue to work. However, the default `authentication_policy` is `*:caching_sha2_password`, so we recommend migrating users to `caching_sha2_password` before upgrading. For more information about the

`authentication_policy` parameter, see Authentication plugin management and Authentication policy (new in 8.4).

Features removed in MySQL 8.4

The following features that were deprecated in MySQL 8.0 have been removed in MySQL 8.4:

- The `mysql_native_password` authentication plugin is enabled by default in Aurora MySQL version 8.4, and this setting is not modifiable. The default `authentication_policy` is `*:caching_sha2_password`, so new users are created with `caching_sha2_password` by default. In community MySQL 8.4, `mysql_native_password` is disabled by default. Aurora MySQL 8.4 differs in that the plugin remains enabled to preserve compatibility with existing users.
- Non-inclusive replication SQL statements are removed. Statements such as `CHANGE MASTER TO`, `SHOW SLAVE STATUS`, `START SLAVE`, `STOP SLAVE`, `SHOW SLAVE HOSTS`, `RESET SLAVE`, `RESET MASTER`, `SHOW MASTER STATUS`, and `PURGE MASTER LOGS` now return syntax errors. Use the replacement statements instead.
- The `INFORMATION_SCHEMA.TABLESPACES` table has been removed.
- The `LOW_PRIORITY` modifier with `LOCK TABLES ... WRITE` now causes a syntax error.
- The `AUTO_INCREMENT` modifier with `FLOAT` and `DOUBLE` columns is no longer supported.
- The `SET_USER_ID` privilege has been removed. Use `SET_ANY_DEFINER` and `ALLOW_NONEXISTENT_DEFINER` instead.
- The `expire_logs_days` parameter has been removed. Use `binlog_expire_logs_seconds` instead.
- Weak TLS ciphers that do not provide perfect forward secrecy or do not use SHA2 are no longer allowed for encrypted connections.

For the full list of removals, see Features Removed in MySQL 8.4 in the *MySQL Reference Manual*.

Security enhancements in Aurora MySQL version 8.4

Aurora MySQL version 8.4 introduces several security enhancements and changes, including the following:

- Enhanced authentication with the `authentication_policy` parameter, replacing the `default_authentication_plugin` parameter. For more information, see Comparing Aurora MySQL version 3 and Aurora MySQL version 8.4.
- Aurora MySQL version 8.4 enforces stricter cryptographic standards aligned with the latest security requirements on the `ssl_ciphers` (TLS 1.2) and `tls_ciphersuites` (TLS 1.3) DB cluster parameters. For more information, see Security with Amazon Aurora MySQL.
- Comprehensive password policy support and improved password validation. For more information, see Password policies and Password validation in Aurora MySQL.
- New dynamic privileges and changes to master user behavior. For more information, see Master user account privileges.

For the full list of changes in MySQL 8.4 community edition, see MySQL 8.4 Release Notes in the *MySQL Reference Manual*.

Release notes for Aurora MySQL version 8.4

For the release notes for all Aurora MySQL version 8.4 releases, see Database engine updates for Amazon Aurora MySQL version 8.4 in the *Release Notes for Aurora MySQL*.

Upgrading to Aurora MySQL version 8.4

You can upgrade from Aurora MySQL version 3 to version 8.4 using an in-place major version upgrade. Direct upgrades from Aurora MySQL version 2 to version 8.4 are not supported. If you are running version 2, you must first upgrade to version 3.

For general information about the major version upgrade process, see Upgrading the major version of an Amazon Aurora MySQL DB cluster.

Before upgrading to version 8.4

Before you upgrade, complete the following preparation steps:

Aurora runs upgrade prechecks automatically before the upgrade begins. These prechecks identify compatibility issues that can block the upgrade. For details about each precheck, see Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4.

1. **Migrate authentication plugins.** Review all database users and migrate any users using `mysql_native_password` to `caching_sha2_password`. In Aurora MySQL version

8.4, the `mysql_native_password` plugin is still supported but deprecated. The default `authentication_policy` is `*:caching_sha2_password`, so new users are created with `caching_sha2_password` by default.

```
-- Find users using mysql_native_password
SELECT user, host, plugin FROM mysql.user WHERE plugin = 'mysql_native_password';

-- Migrate a user to caching_sha2_password
ALTER USER 'username'@'host' IDENTIFIED WITH caching_sha2_password BY 'new_password';
```

2. **Update replication SQL statements.** If your applications or scripts use deprecated replication statements (such as `SHOW SLAVE STATUS` or `CHANGE MASTER TO`), update them to use the replacement statements. These old statements return syntax errors in version 8.4. For the full list, see Comparing Aurora MySQL version 3 and Aurora MySQL version 8.4.
3. **Check for removed parameters.** If your custom parameter groups use parameters removed in version 8.4 (such as `expire_logs_days` or `default_authentication_plugin`), create new MySQL 8.4–compatible parameter groups with the replacement parameters. Apply any necessary custom parameter values to the new parameter groups. For details, see Comparing Aurora MySQL version 3 and Aurora MySQL version 8.4.
4. **Check for incompatible SQL syntax.** Review your application code for removed syntax such as `LOW_PRIORITY` with `LOCK TABLES ... WRITE`, and `AUTO_INCREMENT` on `FLOAT` or `DOUBLE` columns.
5. **Check foreign key constraints.** If your schema uses foreign keys that reference non-unique keys, note that creating new such foreign keys is blocked by default in version 8.4. Existing foreign keys continue to work, but new ones require setting `restrict_fk_on_non_standard_key=OFF`.
6. **Check for new reserved keywords.** Verify that your database objects don't use any of the new reserved keywords added in MySQL 8.4 as unquoted identifiers.
7. **Test the upgrade.** We recommend testing the upgrade on a clone of your production cluster before upgrading the production cluster itself.
8. **Review security considerations.** Review authentication plugin changes, TLS and cipher changes, password policies, the `validate_password` component, and new dynamic privileges before upgrading. For details about these changes and upgrade prechecks, see Security considerations for upgrading from Aurora MySQL version 3 to version 8.4.

How to upgrade to version 8.4

To perform the upgrade, follow the in-place major version upgrade procedure described in Upgrading the major version of an Amazon Aurora MySQL DB cluster. Select the target version 8.4 engine version when modifying your DB cluster.

Alternatively, you can use a Using Amazon Aurora Blue/Green Deployments for database updates to upgrade with minimal downtime. A Blue/Green deployment creates a staging environment that runs the new version alongside your current production environment, allowing you to test and validate before switching over.

After the upgrade completes, perform the post-upgrade cleanup steps described in Post-upgrade cleanup for Aurora MySQL version 8.4.

Post-upgrade cleanup for Aurora MySQL version 8.4

After you finish upgrading your Aurora MySQL version 3 cluster to version 8.4, perform the following cleanup actions:

- **Migrate users to caching_sha2_password.** The default `authentication_policy` is `*:caching_sha2_password` in Aurora MySQL version 8.4. We recommend migrating any remaining users from `mysql_native_password` to `caching_sha2_password` before the upgrade is complete.
- **Update monitoring and automation.** Update any CloudWatch alarms, setup scripts, and automation that use removed replication status variables (such as `Com_show_slave_status` or `Com_slave_start`). Use the replacement status variables instead.
- **Update Amazon CloudFormation templates.** Update any Amazon CloudFormation templates to remove references to removed parameters and use the replacement parameters.

Comparing Aurora MySQL version 3 and Aurora MySQL version 8.4

Amazon Aurora MySQL version 8.4 introduces significant enhancements and changes compared to Aurora MySQL version 3 (compatible with MySQL 8.0). This guide highlights the key differences to help you understand what is new and what has changed.

Topics

- Authentication and Security
- Password Management

- Parameter default changes
- Privileges and Roles

Authentication and Security

Authentication plugin management

Aurora MySQL version 3 uses the `default_authentication_plugin` parameter to configure the default authentication plugin for new database users.

Aurora MySQL version 8.4 replaces the `default_authentication_plugin` with the `authentication_policy` parameter, which provides more flexible authentication configuration.

TLS and encryption

Aurora MySQL version 8.4 enforces stricter security standards:

- The `require_secure_transport` parameter is set to `ON` by default, requiring TLS for all connections.
- Supports only TLS 1.2 and TLS 1.3.
- Enforces modern cryptographic standards with restricted cipher suites.

For more information, see Security with Amazon Aurora MySQL.

Password Management

Password validation

Aurora MySQL version 3 supports the `validate_password` plugin and component through manual installation, limited to default parameters with no customization available.

Aurora MySQL version 8.4 supports managing the `validate_password` component through DB cluster parameters:

- New cluster parameter: `aurora_enable_validate_password_component`
- No manual installation needed – simply enable or disable via parameter.
- Component not listed in `mysql.component` table.
- Component status can be checked via cluster parameter group APIs or global variable `aurora_enable_validate_password_component`.

Aurora MySQL version 8.4 introduces the following cluster-level parameters for password validation customization:

- `validate_password.check_user_name`
- `validate_password.length`
- `validate_password.mixed_case_count`
- `validate_password.number_count`
- `validate_password.policy` (supports LOW and MEDIUM levels only)
- `validate_password.special_char_count`

For more information, see Password policies and Password validation in Aurora MySQL.

The following non-modifiable instance-level `validate_password` plugin parameters are removed in Aurora MySQL version 8.4:

- `validate-password`
- `validate_password_dictionary_file`
- `validate_password_length`
- `validate_password_mixed_case_count`
- `validate_password_number_count`
- `validate_password_policy`
- `validate_password_special_char_count`

For more information, see Aurora MySQL configuration parameters.

Password policies

Aurora MySQL version 8.4 adds comprehensive password policy support through new cluster parameters:

- `default_password_lifetime`
- `password_history`
- `password_reuse_interval`
- `password_require_current`
- `disconnect_on_expired_password`

These parameters work alongside per-account password policies for granular control. For more information, see Password policies and Password validation in Aurora MySQL.

Parameter default changes

temptable_max_mmap

Aurora MySQL version 3 uses a fixed default of 1 GiB (1073741824) for the `temptable_max_mmap` parameter across all instance classes and storage configurations.

Aurora MySQL version 8.4.7 and higher calculates the default dynamically based on the cluster's allocated storage. The formula is:

```
LEAST(4294967296, {AllocatedStorage*3/100})
```

This sets the default to 3% of allocated storage, capped at a maximum of 4 GiB. The default scales with storage capacity while remaining bounded, which helps reduce query failures on reader instances that use the TempTable storage engine.

For the parameter reference entry, see Aurora MySQL configuration parameters.

max_connections

Aurora MySQL version 3 supports a maximum `max_connections` value of 16,000.

Aurora MySQL version 8.4 supports a maximum `max_connections` value of 50,000, starting with version 8.4.10.

> **Note**
>
> The increased maximum applies only to Aurora MySQL version 8.4.10 and higher. For earlier 8.4 versions, the maximum value is 16,000.

The default value of `max_connections` is unchanged. For recommendations on configuring more than 16,000 connections, see Maximum connections to an Aurora MySQL DB instance.

Privileges and Roles

New dynamic privileges

Aurora MySQL version 8.4 supports new privileges, granted to `rds_superuser_role`:

- ALLOW_NONEXISTENT_DEFINER
- FLUSH_PRIVILEGES
- OPTIMIZE_LOCAL_TABLE
- SET_ANY_DEFINER

The SET_USER_ID privilege is removed as it is replaced by ALLOW_NONEXISTENT_DEFINER and SET_ANY_DEFINER.

For more information, see Master user account privileges.

Master user behavior

Aurora MySQL version 3: Master user uses mysql_native_password auth plugin for password-based authentication by default.

Aurora MySQL version 8.4: Master user authentication plugin is set to the default value defined in the authentication_policy cluster parameter (By default, caching_sha2_password plugin).

When resetting the master user password via the Amazon Web Services Management Console, CLI, or API, or through Amazon Secrets Manager rotation, Aurora automatically uses the authentication plugin defined by the current authentication_policy parameter value at the time of the reset.

Protected user enforcement for rdsproxyadmin

Aurora MySQL version 3: rdsproxyadmin is a reserved user name for RDS Proxy. However, the engine does not prevent you from creating, modifying, or dropping a database user with that name.

Aurora MySQL version 8.4 (starting in 8.4.7): rdsproxyadmin is a protected user. The engine rejects CREATE, DROP, RENAME, GRANT, REVOKE, and SET PASSWORD operations against rdsproxyadmin at any host. For the full list of rejected operations and example errors, see Reserved users in Aurora MySQL.

If you created an rdsproxyadmin user in a version 3 cluster, see Protected user enforcement for rdsproxyadmin for pre-upgrade guidance.

Comparing Aurora MySQL version 8.4 and MySQL 8.4 Community Edition

This topic describes the differences between Aurora MySQL version 8.4 and MySQL 8.4 Community Edition.

Topics

- Authentication
- Reserved users
- rds_superuser_role
- Password validation component support in Aurora MySQL version 8.4
- Parameter default changes

Authentication

Aurora MySQL version 8.4 only supports the following values for the `authentication_policy` parameter:

- `*:caching_sha2_password` (Default value. Allows any single factor authentication plugin, using `caching_sha2_password` if none is specified)
- `*:mysql_native_password` (Allows any single factor authentication plugin, using `mysql_native_password` if none is specified)

> **Note**
>
> Multi-factor authentication configurations are not supported in Aurora MySQL.

Reserved users

Aurora MySQL reserves certain usernames for internal features. These usernames cannot be used for your database user accounts. For more information, see Reserved users in Aurora MySQL.

Starting in Aurora MySQL version 8.4.7, the engine protects `rdsproxyadmin` because it is the monitoring user for RDS Proxy. Aurora creates the `rdsproxyadmin` account automatically when you register a proxy target. For details about the rejected operations and error output, see Reserved users in Aurora MySQL.

rds_superuser_role

Aurora MySQL version 8.4 includes a special role that has all the following privileges. This role is named `rds_superuser_role`. The master user for each cluster already has this role granted. The `rds_superuser_role` role includes the following privileges for all database objects:

- ALTER
- ALLOW_NONEXISTENT_DEFINER
- APPLICATION_PASSWORD_ADMIN
- ALTER ROUTINE
- CONNECTION_ADMIN
- CREATE
- CREATE ROLE
- CREATE ROUTINE
- CREATE TEMPORARY TABLES
- CREATE USER
- CREATE VIEW
- DELETE
- DROP
- DROP ROLE
- EVENT
- EXECUTE
- FLUSH_OPTIMIZER_COSTS
- FLUSH_PRIVILEGES
- FLUSH_STATUS
- FLUSH_TABLES
- FLUSH_USER_RESOURCES
- INDEX
- INSERT
- LOCK TABLES
- OPTIMIZE_LOCAL_TABLE
- PROCESS
- REFERENCES
- RELOAD
- REPLICATION CLIENT
- REPLICATION SLAVE

- ROLE_ADMIN
- SELECT
- SET_ANY_DEFINER
- SHOW DATABASES
- SHOW_ROUTINE
- SHOW VIEW
- TRIGGER
- UPDATE
- XA_RECOVER_ADMIN

Password validation component support in Aurora MySQL version 8.4

- The validate_password component is supported, including its customizations. The component is managed through the database parameter aurora_enable_validate_password_component instead of INSTALL COMPONENT and UNINSTALL COMPONENT commands.
- The validate_password plugin is partially supported to allow migration to the component.

For more information, see Password policies and Password validation in Aurora MySQL.

Parameter default changes

temptable_max_mmap

In MySQL 8.4 Community Edition, the default value of temptable_max_mmap is 0, which disables memory-mapped temporary tables.

Aurora MySQL version 8.4.7 and higher overrides this default. Aurora sets temptable_max_mmap to a value calculated from the cluster's allocated storage, using the following formula:

```
LEAST(4294967296, {AllocatedStorage*3/100})
```

This sets the default to 3% of allocated storage, capped at a maximum of 4 GiB. Memory-mapped temporary tables remain enabled by default in Aurora MySQL version 8.4.7 and higher, in contrast to community MySQL 8.4.

For the parameter reference entry, see Aurora MySQL configuration parameters.

Security considerations for upgrading from Aurora MySQL version 3 to version 8.4

When migrating from Aurora MySQL version 3 (MySQL 8.0-compatible) to Aurora MySQL version 8.4, several important security-related changes require careful planning and consideration. This guide outlines the key security changes and provides recommendations for a smooth migration.

Topics

- Authentication policy (new in 8.4)
- Master user behavior
- Encryption and TLS changes
- Password validation component migration
- New dynamic privileges
- Protected user enforcement for rdsproxyadmin

Authentication policy (new in 8.4)

Aurora MySQL version 3 (compatible with MySQL 8.0) uses the `default_authentication_plugin` parameter to configure the default authentication plugin used when creating database users. In Aurora MySQL version 8.4, this parameter is replaced with the `authentication_policy` parameter, set to `*:caching_sha2_password` by default.

Supported values in Aurora MySQL:

- `*:caching_sha2_password` (Default value. Allows any single factor authentication plugin, using `caching_sha2_password` if none is specified)
- `*:mysql_native_password` (Allows any single factor authentication plugin, using `mysql_native_password` if none is specified)

> **Note**
>
> Multi-factor authentication configurations are not supported in Aurora MySQL version 8.4.

The upgrade precheck deprecatedDefaultAuth warns if your source cluster has `default_authentication_plugin` set to `mysql_native_password`. Review this warning and

configure the `authentication_policy` parameter on your target cluster parameter group when upgrading.

Master user behavior

New clusters

The master user is created with the authentication plugin set by the `authentication_policy` parameter at cluster creation time. If you use the default parameter group, the master user is created with `caching_sha2_password` authentication plugin. If you use a custom parameter group with the `authentication_policy` parameter set to `*:mysql_native_password`, the master user is created with `mysql_native_password` authentication plugin.

Master user password reset

When you reset the master user password – via the Amazon Web Services Management Console, CLI (`modify-db-cluster --master-user-password`), or API – Aurora uses the current default plugin defined by the `authentication_policy` parameter at the time of reset.

Secrets Manager and password rotation

When using Amazon Secrets Manager to manage your master user password, if you update the value of the `authentication_policy` parameter, the next password rotation will set the master user's authentication plugin to match the new `authentication_policy` parameter value.

Database users created after upgrade

Existing database users that use the `mysql_native_password` authentication plugin continue to work after upgrade. Database users that you create after upgrade without specifying an `IDENTIFIED WITH` clause use the authentication plugin defined by the `authentication_policy` parameter. When the parameter is at its default value of `*:caching_sha2_password`, new users are created with the `caching_sha2_password` authentication plugin.

To change the default authentication plugin for all new users, update the value of `authentication_policy`. For more information about supported values, see Authentication policy (new in 8.4).

To create a user with a different authentication plugin than the default, specify it explicitly in the `CREATE USER` statement:

```
CREATE USER 'username'@'host' IDENTIFIED WITH authentication-plugin BY 'password';
```

Encryption and TLS changes

To require TLS for all user connections to your Aurora MySQL DB cluster, use the `require_secure_transport` DB cluster parameter. By default, this parameter is set to `ON` in Aurora MySQL version 8.4.

Aurora MySQL version 8.4 enforces stricter cryptographic standards aligned with the latest security requirements on the `ssl_ciphers` (TLS 1.2) and `tls_ciphersuites` (TLS 1.3) DB cluster parameters. For more information, see Security with Amazon Aurora MySQL.

To prevent connection disruptions, verify the TLS configurations for your MySQL client and your target DB cluster before migration.

Password validation component migration

Aurora MySQL version 8.4 introduces the `aurora_enable_validate_password_component` cluster parameter to enable or disable the `validate_password` component. This removes the need to manually install or uninstall it. If you had previously installed the `validate_password` plugin and have since enabled the component after upgrading, only the component is effective – the plugin is ignored.

Starting from Aurora MySQL version 8.4, if you had previously installed the `validate_password` plugin through the `INSTALL PLUGIN` command, you can migrate to the `validate_password` component. Enable the parameter `aurora_enable_validate_password_component` and then remove the plugin through the `UNINSTALL PLUGIN` command on your writer instance.

If you previously installed the `validate_password` component manually using `INSTALL COMPONENT 'file://component_validate_password'`, set the `aurora_enable_validate_password_component` parameter in your target DB cluster parameter group when upgrading. After upgrading, the component will no longer be listed in the `mysql.component` table. You can use the `aurora_enable_validate_password_component` global variable to verify the status of the component.

On the first DB engine startup after upgrade, you will see the following message in your MySQL error log if you had previously installed the component manually:

```
Component 'file://component_validate_password' is being removed from mysql.component
 table.
```

```
validate_password component can be enabled/disabled through
 'aurora_enable_validate_password_component' cluster parameter.
```

The upgrade precheck auroraValidatePasswordPluginCheck warns if the `validate_password` plugin is installed on your source cluster. This warning does not block the upgrade, but you should plan to transition to the component after upgrading.

New dynamic privileges

Aurora MySQL version 8.4 supports the following new privileges:

- `ALLOW_NONEXISTENT_DEFINER`
- `FLUSH_PRIVILEGES`
- `OPTIMIZE_LOCAL_TABLE`
- `SET_ANY_DEFINER`

These privileges are automatically granted to the Master user account privileges for your master user accounts on upgrade.

Protected user enforcement for `rdsproxyadmin`

Starting in Aurora MySQL version 8.4.7, `rdsproxyadmin` is a protected user. The engine rejects `CREATE`, `DROP`, `RENAME`, `GRANT`, `REVOKE`, and `SET PASSWORD` operations against `rdsproxyadmin` at any host. For the full list of rejected operations and example errors, see Reserved users in Aurora MySQL.

Aurora MySQL version 3 does not reserve the `rdsproxyadmin` name. If you created a database user named `rdsproxyadmin` in version 3 (rather than letting the system create it when you register a proxy target), review this section before upgrading to version 8.4.

Before you upgrade

If you created an `rdsproxyadmin` user in your version 3 cluster, rename or drop the account before you upgrade to version 8.4. You can use a version 3 connection to run one of the following statements:

```
-- Rename the existing account to a non-reserved name
RENAME USER 'rdsproxyadmin'@'host' TO 'new_user'@'host';
```

```
-- Or drop the account if it is no longer needed
DROP USER 'rdsproxyadmin'@'host';
```

Update any applications or stored credentials that reference the old user name before starting the upgrade.

If you don't rename or drop the user before upgrading

If you upgrade a cluster that already has an `rdsproxyadmin` user that you created, the upgrade completes successfully. The account is preserved with its existing password and privileges, and you can still connect to the cluster as `rdsproxyadmin` by using the original password.

However, after the upgrade, you can't modify the account. If you try to drop, rename, change privileges on, or change the password for `rdsproxyadmin`, the statement returns an error.

If you want to remove the account after the upgrade, or reclaim the `rdsproxyadmin` name for RDS Proxy to use, contact Amazon Support. Amazon Support can remove a pre-existing `rdsproxyadmin` user carried forward from version 3.

Aurora MySQL version 3 compatible with MySQL 8.0

You can use Aurora MySQL version 3 to get the latest MySQL-compatible features, performance enhancements, and bug fixes. Following, you can learn about Aurora MySQL version 3, with MySQL 8.0 compatibility. You can learn how to upgrade your clusters and applications to Aurora MySQL version 3.

Some Aurora features, such as Aurora Serverless v2, require Aurora MySQL version 3.

> **Tip**
>
> Newer Aurora MySQL major versions are now available, starting with Aurora MySQL version 8.4 (compatible with MySQL 8.4). You can upgrade from Aurora MySQL version 3 to a newer major version. For more information about version numbering, see Checking Aurora MySQL version numbers.

Topics

- Features from MySQL 8.0 Community Edition
- Aurora MySQL version 3 prerequisite for Aurora MySQL Serverless v2

- Release notes for Aurora MySQL version 3
- New parallel query optimizations
- Optimizations to reduce database restart time
- New temporary table behavior in Aurora MySQL version 3
- Comparing Aurora MySQL version 2 and Aurora MySQL version 3
- Comparing Aurora MySQL version 3 and MySQL 8.0 Community Edition
- Upgrading to Aurora MySQL version 3

Features from MySQL 8.0 Community Edition

The initial release of Aurora MySQL version 3 is compatible with MySQL 8.0.23 Community Edition. MySQL 8.0 introduces several new features, including the following:

- Atomic Data Definition Language (DDL) support. For more information, see Atomic Data Definition Language (DDL) support.
- JSON functions. For usage information, see JSON Functions in the *MySQL Reference Manual*.
- Window functions. For usage information, see Window Functions in the *MySQL Reference Manual*.
- Common table expressions (CTEs), using the `WITH` clause. For usage information, see WITH (Common Table Expressions) in the *MySQL Reference Manual*.
- Optimized `ADD COLUMN` and `RENAME COLUMN` clauses for the `ALTER TABLE` statement. These optimizations are called "instant DDL." Aurora MySQL version 3 is compatible with the community MySQL instant DDL feature. The former Aurora fast DDL feature isn't used. For usage information for instant DDL, see Instant DDL (Aurora MySQL version 3 and version 8.4).
- Descending, functional, and invisible indexes. For usage information, see Invisible Indexes, Descending Indexes, and CREATE INDEX Statement in the *MySQL Reference Manual*.
- Role-based privileges controlled through SQL statements. For more information on changes to the privilege model, see Role-based privilege model.
- `NOWAIT` and `SKIP LOCKED` clauses with the `SELECT ... FOR SHARE` statement. These clauses avoid waiting for other transactions to release row locks. For usage information, see Locking Reads in the *MySQL Reference Manual*.
- Improvements to binary log (binlog) replication. For the Aurora MySQL details, see Binary log replication. In particular, you can perform filtered replication. For usage information about

filtered replication, see How Servers Evaluate Replication Filtering Rules in the *MySQL Reference Manual*.

- Hints. Some of the MySQL 8.0–compatible hints were already backported to Aurora MySQL version 2. For information about using hints with Aurora MySQL, see Aurora MySQL hints. For the full list of hints in community MySQL 8.0, see Optimizer Hints in the *MySQL Reference Manual*.

For the full list of features added to MySQL 8.0 community edition, see the blog post The complete list of new features in MySQL 8.0.

Aurora MySQL version 3 also includes changes to keywords for inclusive language, backported from community MySQL 8.0.26. For details about those changes, see Inclusive language changes for Aurora MySQL version 3.

Aurora MySQL version 3 prerequisite for Aurora MySQL Serverless v2

Aurora MySQL version 3 is a prerequisite for all DB instances in an Aurora MySQL Aurora serverless cluster. Aurora MySQL Aurora serverless includes support for reader instances in a DB cluster, and other Aurora features that aren't available for Aurora MySQL Serverless v1. It also has faster and more granular scaling than Aurora MySQL Serverless v1.

Release notes for Aurora MySQL version 3

For the release notes for all Aurora MySQL version 3 releases, see Database engine updates for Amazon Aurora MySQL version 3 in the *Release Notes for Aurora MySQL*.

New parallel query optimizations

The Aurora parallel query optimization now applies to more SQL operations:

- Parallel query now applies to tables containing the data types `TEXT`, `BLOB`, `JSON`, `GEOMETRY`, and `VARCHAR` and `CHAR` longer than 768 bytes.
- Parallel query can optimize queries involving partitioned tables.
- Parallel query can optimize queries involving aggregate function calls in the select list and the `HAVING` clause.

For more information about these enhancements, see Upgrading parallel query clusters to Aurora MySQL version 3. For general information about Aurora parallel query, see Parallel query for Amazon Aurora MySQL.

Optimizations to reduce database restart time

Your Aurora MySQL DB cluster must be highly available during both planned and unplanned outages.

Database administrators need to perform occasional database maintenance. This maintenance includes database patching, upgrades, database parameter modifications requiring a manual reboot, performing a failover to reduce the time it takes for instance class changes, and so on. These planned actions require downtime.

However, downtime can also be caused by unplanned actions, such as an unexpected failover due to an underlying hardware fault or database resource throttling. All of these planned and unplanned actions result in a database restart.

In Aurora MySQL version 3.05 and higher, we've introduced optimizations that reduce the database restart time. These optimizations provide up to 65% less downtime than without optimizations, and fewer disruptions to your database workloads, after a restart.

During database startup, many internal memory components are initialized. The largest of these is the InnoDB buffer pool, which in Aurora MySQL is 75% of the instance memory size by default. Our testing has found that the initialization time is proportional to the size of InnoDB buffer pool, and therefore scales with the DB instance class size. During this initialization phase, the database can't accept connections, which causes longer downtime during restarts. The first phase of Aurora MySQL fast restart optimizes the buffer pool initialization, which reduces the time for database initialization and thereby reduces the overall restart time.

For more details, see the blog Reduce downtime with Amazon Aurora MySQL database restart time optimizations.

New temporary table behavior in Aurora MySQL version 3

Aurora MySQL version 3 handles temporary tables differently from earlier Aurora MySQL versions. This new behavior is inherited from MySQL 8.0 Community Edition. There are two types of temporary tables that can be created with Aurora MySQL version 3:

- Internal (or *implicit*) temporary tables – Created by the Aurora MySQL engine to handle operations such as sorting aggregation, derived tables, or common table expressions (CTEs).
- User-created (or *explicit*) temporary tables – Created by the Aurora MySQL engine when you use the `CREATE TEMPORARY TABLE` statement.

There are additional considerations for both internal and user-created temporary tables on Aurora reader DB instances. We discuss these changes in the following sections.

Topics

- Storage engine for internal (implicit) temporary tables
- Limiting the size of internal, in-memory temporary tables
- Mitigating fullness issues for internal temporary tables on Aurora Replicas
- Optimizing the temptable_max_mmap parameter on Aurora MySQL DB instances
- User-created (explicit) temporary tables on reader DB instances
- Temporary table creation errors and mitigation

Storage engine for internal (implicit) temporary tables

When generating intermediate result sets, Aurora MySQL initially attempts to write to in-memory temporary tables. This might be unsuccessful, because of either incompatible data types or configured limits. If so, the temporary table is converted to an on-disk temporary table rather than being held in memory. More information on this can be found in the Internal Temporary Table Use in MySQL in the MySQL documentation.

In Aurora MySQL version 3, the way internal temporary tables work is different from earlier Aurora MySQL versions. Instead of choosing between the InnoDB and MyISAM storage engines for such temporary tables, now you choose between the `TempTable` and `MEMORY` storage engines.

With the `TempTable` storage engine, you can make an additional choice for how to handle certain data. The data affected overflows the memory pool that holds all the internal temporary tables for the DB instance.

Those choices can influence the performance for queries that generate high volumes of temporary data, for example while performing aggregations such as `GROUP BY` on large tables.

> **Tip**
>
> If your workload includes queries that generate internal temporary tables, confirm how your application performs with this change by running benchmarks and monitoring performance-related metrics.
> In some cases, the amount of temporary data fits within the `TempTable` memory pool or only overflows the memory pool by a small amount. In these cases, we recommend using

the `TempTable` setting for internal temporary tables and memory-mapped files to hold any overflow data. This setting is the default.

The `TempTable` storage engine is the default. `TempTable` uses a common memory pool for all temporary tables that use this engine, instead of a maximum memory limit per table. The size of this memory pool is specified by the temptable_max_ram parameter. It defaults to 1 GiB on DB instances with 16 or more GiB of memory, and 16 MB on DB instances with less than 16 GiB of memory. The size of the memory pool influences session-level memory consumption.

In some cases when you use the `TempTable` storage engine, the temporary data might exceed the size of the memory pool. If so, Aurora MySQL stores the overflow data using a secondary mechanism.

You can set the temptable_max_mmap parameter to choose whether the data overflows to memory-mapped temporary files or to InnoDB internal temporary tables on disk. The different data formats and overflow criteria of these overflow mechanisms can affect query performance. They do so by influencing the amount of data written to disk and the demand on disk storage throughput.

Aurora MySQL version 3 stores the overflow data in the following way:

- On the writer DB instance, data that overflows to InnoDB internal temporary tables or memory-mapped temporary files resides in local storage on the instance.
- On reader DB instances, overflow data always resides in memory-mapped temporary files in local storage.

  Read-only instances can't store any data on the Aurora cluster volume.

The configuration parameters related to internal temporary tables apply differently to the writer and reader instances in your cluster:

- On reader instances, Aurora MySQL always uses the `TempTable` storage engine.
- The size for `temptable_max_mmap` defaults to 1 GiB for both writer and reader instances, regardless of the DB instance memory size. You can adjust this value on both writer and reader instances.
- Setting `temptable_max_mmap` to `0` turns off the use of memory-mapped temporary files on writer instances.

- You can't set `temptable_max_mmap` to `0` on reader instances.

> **Note**
>
> We don't recommend using the temptable_use_mmap parameter. It has been deprecated, and support for it is expected to be removed in a future MySQL release.

Limiting the size of internal, in-memory temporary tables

As discussed in Storage engine for internal (implicit) temporary tables, you can control temporary table resources globally by using the temptable_max_ram and temptable_max_mmap settings.

You can also limit the size of any individual internal, in-memory temporary table by using the tmp_table_size DB parameter. This limit is intended to prevent individual queries from consuming an inordinate amount of global temporary table resources, which can affect the performance of concurrent queries that require these resources.

The `tmp_table_size` parameter defines the maximum size of temporary tables created by the `MEMORY` storage engine in Aurora MySQL version 3.

In Aurora MySQL version 3.04 and higher, `tmp_table_size` also defines the maximum size of temporary tables created by the `TempTable` storage engine when the `aurora_tmptable_enable_per_table_limit` DB parameter is set to `ON`. This behavior is disabled by default (`OFF`), which is the same behavior as in Aurora MySQL version 3.03 and lower versions.

- When `aurora_tmptable_enable_per_table_limit` is `OFF`, `tmp_table_size` isn't considered for internal, in-memory temporary tables created by the `TempTable` storage engine.

  However, the global `TempTable` resources limit still applies. Aurora MySQL has the following behavior when the global `TempTable` resources limit is reached:

  - Writer DB instances – Aurora MySQL automatically converts the in-memory temporary table to an InnoDB on-disk temporary table.
  - Reader DB instances – The query ends with an error.

    ```
    ERROR 1114 (HY000): The table '/rdsdbdata/tmp/#sqlxx_xxx' is full
    ```

- When `aurora_tmptable_enable_per_table_limit` is `ON`, Aurora MySQL has the following behavior when the `tmp_table_size` limit is reached:
  - Writer DB instances – Aurora MySQL automatically converts the in-memory temporary table to an InnoDB on-disk temporary table.
  - Reader DB instances – The query ends with an error.

    ```
    ERROR 1114 (HY000): The table '/rdsdbdata/tmp/#sqlxx_xxx' is full
    ```

    Both the global `TempTable` resources limit and the per-table limit apply in this case.

> **Note**
>
> The `aurora_tmptable_enable_per_table_limit` parameter has no effect when `internal_tmp_mem_storage_engine` is set to `MEMORY`. In this case, the maximum size of an in-memory temporary table is defined by the `tmp_table_size` or `max_heap_table_size` value, whichever is smaller.

The following examples show the behavior of the `aurora_tmptable_enable_per_table_limit` parameter for writer and reader DB instances.

Example of writer DB instance with `aurora_tmptable_enable_per_table_limit` set to `OFF`

The in-memory temporary table isn't converted to an InnoDB on-disk temporary table.

```
mysql> set aurora_tmptable_enable_per_table_limit=0;
Query OK, 0 rows affected (0.00 sec)

mysql> select
 @@innodb_read_only,@@aurora_version,@@aurora_tmptable_enable_per_table_limit,@@temptable_max_r
+--------------------+-----------------+---------------------------------------
+---------------------+----------------------+
| @@innodb_read_only | @@aurora_version | @@aurora_tmptable_enable_per_table_limit |
 @@temptable_max_ram | @@temptable_max_mmap |
+--------------------+-----------------+---------------------------------------
+---------------------+----------------------+
|                  0 | 3.04.0           |                                     0 |
       1073741824 |           1073741824 |
```

```
+--------------------+-----------------+----------------------------------------
+---------------------+----------------------+
1 row in set (0.00 sec)

mysql> show status like '%created_tmp_disk%';
+--------------------------+-------+
| Variable_name            | Value |
+--------------------------+-------+
| Created_tmp_disk_tables | 0     |
+--------------------------+-------+
1 row in set (0.00 sec)

mysql> set cte_max_recursion_depth=4294967295;
Query OK, 0 rows affected (0.00 sec)

mysql> WITH RECURSIVE cte (n) AS (SELECT 1 UNION ALL SELECT n + 1 FROM cte WHERE n <
 60000000) SELECT max(n) FROM cte;
+----------+
| max(n)   |
+----------+
| 60000000 |
+----------+
1 row in set (13.99 sec)

mysql> show status like '%created_tmp_disk%';
+--------------------------+-------+
| Variable_name            | Value |
+--------------------------+-------+
| Created_tmp_disk_tables | 0     |
+--------------------------+-------+
1 row in set (0.00 sec)
```

Example of writer DB instance with `aurora_tmptable_enable_per_table_limit` set to `ON`

The in-memory temporary table is converted to an InnoDB on-disk temporary table.

```
mysql> set aurora_tmptable_enable_per_table_limit=1;
Query OK, 0 rows affected (0.00 sec)

mysql> select
 @@innodb_read_only,@@aurora_version,@@aurora_tmptable_enable_per_table_limit,@@tmp_table_size;
+--------------------+-----------------+----------------------------------------
+------------------+
```

```
| @@innodb_read_only | @@aurora_version | @@aurora_tmptable_enable_per_table_limit |
 @@tmp_table_size |
+--------------------+------------------+------------------------------------------
+------------------+
|                  0 | 3.04.0           |                                        1 |
      16777216 |
+--------------------+------------------+------------------------------------------
+------------------+
1 row in set (0.00 sec)

mysql> set cte_max_recursion_depth=4294967295;
Query OK, 0 rows affected (0.00 sec)

mysql> show status like '%created_tmp_disk%';
+-------------------------+-------+
| Variable_name           | Value |
+-------------------------+-------+
| Created_tmp_disk_tables | 0     |
+-------------------------+-------+
1 row in set (0.00 sec)

mysql> WITH RECURSIVE cte (n) AS (SELECT 1 UNION ALL SELECT n + 1 FROM cte WHERE n <
 6000000) SELECT max(n) FROM cte;
+---------+
| max(n)  |
+---------+
| 6000000 |
+---------+
1 row in set (4.10 sec)

mysql> show status like '%created_tmp_disk%';
+-------------------------+-------+
| Variable_name           | Value |
+-------------------------+-------+
| Created_tmp_disk_tables | 1     |
+-------------------------+-------+
1 row in set (0.00 sec)
```

Example of reader DB instance with `aurora_tmptable_enable_per_table_limit` set to `OFF`

The query finishes without an error because `tmp_table_size` doesn't apply, and the global `TempTable` resources limit hasn't been reached.

```
mysql> set aurora_tmptable_enable_per_table_limit=0;
Query OK, 0 rows affected (0.00 sec)

mysql> select
 @@innodb_read_only,@@aurora_version,@@aurora_tmptable_enable_per_table_limit,@@temptable_max_r
+-------------------+-----------------+-----------------------------------------
+---------------------+----------------------+
| @@innodb_read_only | @@aurora_version | @@aurora_tmptable_enable_per_table_limit |
 @@temptable_max_ram | @@temptable_max_mmap |
+-------------------+-----------------+-----------------------------------------
+---------------------+----------------------+
|                  1 | 3.04.0          |                                        0 |
       1073741824 |          1073741824 |
+-------------------+-----------------+-----------------------------------------
+---------------------+----------------------+
1 row in set (0.00 sec)

mysql> set cte_max_recursion_depth=4294967295;
Query OK, 0 rows affected (0.00 sec)

mysql> WITH RECURSIVE cte (n) AS (SELECT 1 UNION ALL SELECT n + 1 FROM cte WHERE n <
 60000000) SELECT max(n) FROM cte;
+----------+
| max(n)   |
+----------+
| 60000000 |
+----------+
1 row in set (14.05 sec)
```

Example of reader DB instance with `aurora_tmptable_enable_per_table_limit` set to `OFF`

This query reaches the global TempTable resources limit with `aurora_tmptable_enable_per_table_limit` set to OFF. The query ends with an error on reader instances.

```
mysql> set aurora_tmptable_enable_per_table_limit=0;
Query OK, 0 rows affected (0.00 sec)

mysql> select
 @@innodb_read_only,@@aurora_version,@@aurora_tmptable_enable_per_table_limit,@@temptable_max_r
+-------------------+-----------------+-----------------------------------------
+---------------------+----------------------+
```

```
| @@innodb_read_only | @@aurora_version | @@aurora_tmptable_enable_per_table_limit |
 @@temptable_max_ram | @@temptable_max_mmap |
+--------------------+------------------+------------------------------------------
+---------------------+----------------------+
|                  1 | 3.04.0           |                                        0 |
       1073741824 |           1073741824 |
+--------------------+------------------+------------------------------------------
+---------------------+----------------------+
1 row in set (0.00 sec)

mysql> set cte_max_recursion_depth=4294967295;
Query OK, 0 rows affected (0.01 sec)

mysql> WITH RECURSIVE cte (n) AS (SELECT 1 UNION ALL SELECT n + 1 FROM cte WHERE n <
 120000000) SELECT max(n) FROM cte;
ERROR 1114 (HY000): The table '/rdsdbdata/tmp/#sqlfd_1586_2' is full
```

Example of reader DB instance with `aurora_tmptable_enable_per_table_limit` set to `ON`

The query ends with an error when the `tmp_table_size` limit is reached.

```
mysql> set aurora_tmptable_enable_per_table_limit=1;
Query OK, 0 rows affected (0.00 sec)

mysql> select
 @@innodb_read_only,@@aurora_version,@@aurora_tmptable_enable_per_table_limit,@@tmp_table_size;
+--------------------+------------------+------------------------------------------
+------------------+
| @@innodb_read_only | @@aurora_version | @@aurora_tmptable_enable_per_table_limit |
 @@tmp_table_size |
+--------------------+------------------+------------------------------------------
+------------------+
|                  1 | 3.04.0           |                                        1 |
      16777216 |
+--------------------+------------------+------------------------------------------
+------------------+
1 row in set (0.00 sec)

mysql> set cte_max_recursion_depth=4294967295;
Query OK, 0 rows affected (0.00 sec)

mysql> WITH RECURSIVE cte (n) AS (SELECT 1 UNION ALL SELECT n + 1 FROM cte WHERE n <
 6000000) SELECT max(n) FROM cte;
```

```
ERROR 1114 (HY000): The table '/rdsdbdata/tmp/#sqlfd_8_2' is full
```

Mitigating fullness issues for internal temporary tables on Aurora Replicas

To avoid size limitation issues for temporary tables, set the `temptable_max_ram` and `temptable_max_mmap` parameters to a combined value that can fit the requirements of your workload.

Be careful when setting the value of the `temptable_max_ram` parameter. Setting the value too high reduces the available memory on the database instance, which can cause an out-of-memory condition. Monitor the average freeable memory on the DB instance. Then determine an appropriate value for `temptable_max_ram` so that you will still have a reasonable amount of free memory left on the instance. For more information, see Freeable memory issues in Amazon Aurora.

It is also important to monitor the size of the local storage and the temporary table space consumption. You can monitor the temporary storage available for a specific DB instance with the `FreeLocalStorage` Amazon CloudWatch metric, described in Amazon CloudWatch metrics for Amazon Aurora.

> **Note**
>
> This procedure doesn't work when the `aurora_tmptable_enable_per_table_limit` parameter is set to `ON`. For more information, see Limiting the size of internal, in-memory temporary tables.

Example 1

You know that your temporary tables grow to a cumulative size of 20 GiB. You want to set in-memory temporary tables to 2 GiB and to grow to a maximum of 20 GiB on disk.

Set `temptable_max_ram` to **`2,147,483,648`** and `temptable_max_mmap` to **`21,474,836,480`**. These values are in bytes.

These parameter settings make sure that your temporary tables can grow to a cumulative total of 22 GiB.

Example 2

Your current instance size is 16xlarge or larger. You don't know the total size of the temporary tables that you might need. You want to be able to use up to 4 GiB in memory and up to the maximum available storage size on disk.

Set `temptable_max_ram` to **`4,294,967,296`** and `temptable_max_mmap` to **`1,099,511,627,776`**. These values are in bytes.

Here you're setting `temptable_max_mmap` to 1 TiB, which is less than the maximum local storage of 1.2 TiB on a 16xlarge Aurora DB instance.

On a smaller instance size, adjust the value of `temptable_max_mmap` so that it doesn't fill up the available local storage. For example, a 2xlarge instance has only 160 GiB of local storage available. Hence, we recommend setting the value to less than 160 GiB. For more information on the available local storage for DB instance sizes, see Temporary storage limits for Aurora MySQL.

Optimizing the temptable_max_mmap parameter on Aurora MySQL DB instances

The `temptable_max_mmap` parameter in Aurora MySQL controls the maximum amount of local disk space that can be used by memory mapped files before overflowing to the on-disk InnoDB temporary tables (on writer DB instances) or causing an error (on reader DB instances). Setting this DB instance parameter properly can help optimize the performance of your DB instances.

Prerequisites

1. Make sure that the Performance Schema is enabled. You can verify this by running the following SQL command:

   ```
   SELECT @@performance_schema;
   ```

   An output value of 1 indicates that it's enabled.
2. Confirm that the temporary table memory instrumentation is enabled. You can verify this by running the following SQL command:

   ```
   SELECT name, enabled FROM performance_schema.setup_instruments WHERE name LIKE
    '%memory%temptable%';
   ```

   The `enabled` column shows YES for the relevant temporary table memory instrumentation entries.

Monitoring temporary table usage

When setting the initial value for `temptable_max_mmap`, we recommend that you start with 80% of the local storage size for the DB instance class that you're using. This ensures that the temporary tables have enough disk space to operate efficiently, while leaving room for other disk usage on the instance.

To find the local storage size for your DB instance class, see Temporary storage limits for Aurora MySQL.

For example, if you're using the db.r5.large DB instance class, the local storage size is 32 GiB. In this case, you would initially set the `temptable_max_mmap` parameter to 80% of 32 GiB, which is 25.6 GiB.

After setting the initial `temptable_max_mmap` value, run your peak workload on the Aurora MySQL instances. Monitor the current and high temporary table disk usage using the following SQL query:

```
SELECT event_name, current_count, current_alloc, current_avg_alloc, high_count,
 high_alloc, high_avg_alloc
FROM sys.memory_global_by_current_bytes WHERE event_name LIKE 'memory/temptable/%';
```

This query retrieves the following information:

- `event_name` – The name of the temporary table memory or disk usage event.
- `current_count` – The current number of allocated temporary table memory or disk blocks.
- `current_alloc` – The current amount of memory or disk allocated for temporary tables.
- `current_avg_alloc` – The current average size of temporary table memory or disk blocks.
- `high_count` – The highest number of allocated temporary table memory or disk blocks.
- `high_alloc` – The highest amount of memory or disk allocated for temporary tables.
- `high_avg_alloc` – The highest average size of temporary table memory or disk blocks.

If your queries fail with a Table is full error using this setting, it indicates that your workload requires more disk space for temporary table operations. In this case, consider increasing your DB instance size to one with more local storage space.

Setting the optimal `temptable_max_mmap` value

Use the following procedure to monitor and set the right size for the `temptable_max_mmap` parameter.

1. Review the output of the previous query, and identify the peak temporary table disk usage, as indicated by the `high_alloc` column.
2. Based on the peak temporary table disk usage, adjust the `temptable_max_mmap` parameter in the DB parameter group for your Aurora MySQL DB instances.

   Set the value to be slightly higher than the peak temporary table disk usage to accommodate future growth.
3. Apply the parameter group changes to your DB instances.
4. Monitor the temporary table disk usage again during your peak workload to make sure that the new `temptable_max_mmap` value is appropriate.
5. Repeat the previous steps as needed to fine tune the `temptable_max_mmap` parameter.

User-created (explicit) temporary tables on reader DB instances

You can create explicit temporary tables using the `TEMPORARY` keyword in your `CREATE TABLE` statement. Explicit temporary tables are supported on the writer DB instance in an Aurora DB cluster. You can also use explicit temporary tables on reader DB instances, but the tables can't enforce the use of the InnoDB storage engine.

To avoid errors while creating explicit temporary tables on Aurora MySQL reader DB instances, make sure that you run all `CREATE TEMPORARY TABLE` statements in either or both of the following ways:

- Don't specify the `ENGINE=InnoDB` clause.
- Don't set the SQL mode to `NO_ENGINE_SUBSTITUTION`.

Temporary table creation errors and mitigation

The error that you receive is different depending on whether you use a plain `CREATE TEMPORARY TABLE` statement or the variation `CREATE TEMPORARY TABLE AS SELECT`. The following examples show the different kinds of errors.

This temporary table behavior only applies to read-only instances. This first example confirms that's the kind of instance the session is connected to.

```
mysql> select @@innodb_read_only;
+--------------------+
```

```
| @@innodb_read_only |
+--------------------+
|                  1 |
+--------------------+
```

For plain CREATE TEMPORARY TABLE statements, the statement fails when the NO_ENGINE_SUBSTITUTION SQL mode is turned on. When NO_ENGINE_SUBSTITUTION is turned off (default), the appropriate engine substitution is made, and the temporary table creation succeeds.

```
mysql> set sql_mode = 'NO_ENGINE_SUBSTITUTION';

mysql>  CREATE TEMPORARY TABLE tt2 (id int) ENGINE=InnoDB;
ERROR 3161 (HY000): Storage engine InnoDB is disabled (Table creation is disallowed).

mysql> SET sql_mode = '';

mysql> CREATE TEMPORARY TABLE tt4 (id int) ENGINE=InnoDB;

mysql> SHOW CREATE TABLE tt4\G
*************************** 1. row ***************************
       Table: tt4
Create Table: CREATE TEMPORARY TABLE `tt4` (
  `id` int DEFAULT NULL
) ENGINE=MyISAM DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_0900_ai_ci
```

For CREATE TEMPORARY TABLE AS SELECT statements, the statement fails when the NO_ENGINE_SUBSTITUTION SQL mode is turned on. When NO_ENGINE_SUBSTITUTION is turned off (default), the appropriate engine substitution is made, and the temporary table creation succeeds.

```
mysql> set sql_mode = 'NO_ENGINE_SUBSTITUTION';

mysql> CREATE TEMPORARY TABLE tt1 ENGINE=InnoDB AS SELECT * FROM t1;
ERROR 3161 (HY000): Storage engine InnoDB is disabled (Table creation is disallowed).

mysql> SET sql_mode = '';

mysql> show create table tt3;
+-------+-----------------------------------------------------------+
| Table | Create Table                                              |
+-------+-----------------------------------------------------------+
```

```
| tt3   | CREATE TEMPORARY TABLE `tt3` (
  `id` int DEFAULT NULL
) ENGINE=MyISAM DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_0900_ai_ci |
+-------+----------------------------------------------------------+
1 row in set (0.00 sec)
```

For more information about the storage aspects and performance implications of temporary tables in Aurora MySQL version 3, see the blog post Use the TempTable storage engine on Amazon RDS for MySQL and Amazon Aurora MySQL.

Comparing Aurora MySQL version 2 and Aurora MySQL version 3

Use the following to learn about changes to be aware of when you upgrade your Aurora MySQL version 2 cluster to version 3.

Topics

- Atomic Data Definition Language (DDL) support
- Feature differences between Aurora MySQL version 2 and 3
- Instance class support
- Parameter changes for Aurora MySQL version 3
- Status variables
- Inclusive language changes for Aurora MySQL version 3
- AUTO_INCREMENT values
- Binary log replication

Atomic Data Definition Language (DDL) support

One of the largest changes from MySQL 5.7 to 8.0 is the introduction of the Atomic Data Dictionary. Before MySQL 8.0, the MySQL data dictionary used a file-based approach to store metadata such as table definitions (.frm), triggers (.trg), and functions separately from the storage engine's metadata (such as InnoDB's). This had some issues, including the risk of tables becoming "orphaned" if something unexpected happened during a DDL operation, causing the file-based and storage engine metadata to get out of sync.

To fix this, MySQL 8.0 introduced the Atomic Data Dictionary, which stores all metadata in a set of internal InnoDB tables in the `mysql` schema. This new architecture provides a transactional, ACID-

compliant way to manage database metadata, solving the "atomic DDL" problem from the old file-based approach. For more information on the Atomic Data Dictionary, see Removal of file-based metadata storage and Atomic data definition statement support in the *MySQL Reference Manual*.

Due to this architectural change, you must consider the following when upgrading from Aurora MySQL version 2 to version 3:

- The file-based metadata from version 2 must be migrated to the new data dictionary tables during the upgrade process to version 3. Depending on how many database objects are migrated, this could take some time.
- The changes have also introduced some new incompatibilities that might need to be addressed before you can upgrade from MySQL 5.7 to 8.0. For example, 8.0 has some new reserved keywords that could conflict with existing database object names.

To help you identify these incompatibilities before upgrading the engine, Aurora MySQL runs a series of upgrade compatibility checks (prechecks) to determine whether there are any incompatible objects in your database dictionary, before performing the data dictionary upgrade. For more information on the prechecks, see Major version upgrade prechecks for Aurora MySQL.

Feature differences between Aurora MySQL version 2 and 3

The following Amazon Aurora MySQL features are supported in Aurora MySQL for MySQL 5.7, but these features aren't supported in Aurora MySQL for MySQL 8.0:

- You can't use Aurora MySQL version 3 for Aurora Serverless v1 clusters. Aurora MySQL version 3 works with Aurora Serverless v2.
- Lab mode doesn't apply to Aurora MySQL version 3. There aren't any lab mode features in Aurora MySQL version 3. Instant DDL supersedes the fast online DDL feature that was formerly available in lab mode. For an example, see Instant DDL (Aurora MySQL version 3 and version 8.4).
- The query cache is removed from community MySQL 8.0 and also from Aurora MySQL version 3.
- Aurora MySQL version 3 is compatible with the community MySQL hash join feature. The Aurora-specific implementation of hash joins in Aurora MySQL version 2 isn't used. For information about using hash joins with Aurora parallel query, see Turning on hash join for parallel query clusters and Aurora MySQL hints. For general usage information about hash joins, see Hash Join Optimization in the *MySQL Reference Manual*.
- The `mysql.lambda_async` stored procedure that was deprecated in Aurora MySQL version 2 is removed in version 3. For version 3, use the asynchronous function `lambda_async` instead.

- The default character set in Aurora MySQL version 3 is `utf8mb4`. In Aurora MySQL version 2, the default character set was `latin1`. For information about this character set, see The utf8mb4 Character Set (4-Byte UTF-8 Unicode Encoding) in the *MySQL Reference Manual*.

Some Aurora MySQL features are available for certain combinations of Amazon Region and DB engine version. For details, see Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine.

Instance class support

Aurora MySQL version 3 supports a different set of instance classes from Aurora MySQL version 2:

- For larger instances, you can use the modern instance classes such as `db.r5`, `db.r6g`, and `db.x2g`.
- For smaller instances, you can use the modern instance classes such as `db.t3` and `db.t4g`.

> **Note**
>
> We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see Using T instance classes for development and testing.

The following instance classes from Aurora MySQL version 2 aren't available for Aurora MySQL version 3:

- `db.r4`
- `db.r3`
- `db.t3.small`
- `db.t2`

Check your administration scripts for any CLI statements that create Aurora MySQL DB instances. Hardcode instance class names that aren't available for Aurora MySQL version 3. If necessary, modify the instance class names to ones that Aurora MySQL version 3 supports.

> **Tip**
>
> To check the instance classes that you can use for a specific combination of Aurora MySQL version and Amazon Region, use the `describe-orderable-db-instance-options` Amazon CLI command.

For full details about Aurora instance classes, see Amazon AuroraDB instance classes.

Parameter changes for Aurora MySQL version 3

Aurora MySQL version 3 includes new cluster-level and instance-level configuration parameters. Aurora MySQL version 3 also removes some parameters that were present in Aurora MySQL version 2. Some parameter names are changed as a result of the initiative for inclusive language. For backward compatibility, you can still retrieve the parameter values using either the old names or the new names. However, you must use the new names to specify parameter values in a custom parameter group.

In Aurora MySQL version 3, the value of the `lower_case_table_names` parameter is set permanently at the time the cluster is created. If you use a nondefault value for this option, set up your Aurora MySQL version 3 custom parameter group before upgrading. Then specify the parameter group during the create cluster or snapshot restore operation.

> **Note**
>
> With an Aurora global database based on Aurora MySQL, you can't perform an in-place upgrade from Aurora MySQL version 2 to version 3 if the `lower_case_table_names` parameter is turned on. Use the snapshot restore method instead.

In Aurora MySQL version 3, the `init_connect` and `read_only` parameters don't apply for users who have the `CONNECTION_ADMIN` privilege. This includes the Aurora master user. For more information, see Role-based privilege model.

For the full list of Aurora MySQL cluster parameters, see Cluster-level parameters. The table covers all the parameters from Aurora MySQL version 2 and 3. The table includes notes showing which parameters are new in Aurora MySQL version 3 or were removed from Aurora MySQL version 3.

For the full list of Aurora MySQL instance parameters, see Instance-level parameters. The table covers all the parameters from Aurora MySQL version 2 and 3. The table includes notes showing which parameters are new in Aurora MySQL version 3 and which parameters were removed from Aurora MySQL version 3. It also includes notes showing which parameters were modifiable in earlier versions but not Aurora MySQL version 3.

For information about parameter names that changed, see Inclusive language changes for Aurora MySQL version 3.

Status variables

For information about status variables that aren't applicable to Aurora MySQL, see MySQL status variables that don't apply to Aurora MySQL.

Inclusive language changes for Aurora MySQL version 3

Aurora MySQL version 3 is compatible with version 8.0.23 from the MySQL community edition. Aurora MySQL version 3 also includes changes from MySQL 8.0.26 related to keywords and system schemas for inclusive language. For example, the `SHOW REPLICA STATUS` command is now preferred instead of `SHOW SLAVE STATUS`.

The following Amazon CloudWatch metrics have new names in Aurora MySQL version 3.

In Aurora MySQL version 3, only the new metric names are available. Make sure to update any alarms or other automation that relies on metric names when you upgrade to Aurora MySQL version 3.

Old name	New name	
`ForwardingMasterDMLLatency`	`ForwardingWriterDMLLatency`	
`ForwardingMasterOpenSessions`	`ForwardingWriterOpenSessions`	
`AuroraDMLRejectedMasterFull`	`AuroraDMLRejectedWriterFull`	
`ForwardingMasterDMLThroughput`	`ForwardingWriterDMLThroughput`	

The following status variables have new names in Aurora MySQL version 3.

For compatibility, you can use either name in the initial Aurora MySQL version 3 release. The old status variable names are to be removed in a future release.

Name to be removed	New or preferred name
`Aurora_fwd_master_dml_stmt_duration`	`Aurora_fwd_writer_dml_stmt_duration`
`Aurora_fwd_master_dml_stmt_count`	`Aurora_fwd_writer_dml_stmt_count`
`Aurora_fwd_master_select_stmt_duration`	`Aurora_fwd_writer_select_stmt_duration`
`Aurora_fwd_master_select_stmt_count`	`Aurora_fwd_writer_select_stmt_count`
`Aurora_fwd_master_errors_session_timeout`	`Aurora_fwd_writer_errors_session_timeout`
`Aurora_fwd_master_open_sessions`	`Aurora_fwd_writer_open_sessions`
`Aurora_fwd_master_errors_session_limit`	`Aurora_fwd_writer_errors_session_limit`
`Aurora_fwd_master_errors_rpc_timeout`	`Aurora_fwd_writer_errors_rpc_timeout`

The following configuration parameters have new names in Aurora MySQL version 3.

For compatibility, you can check the parameter values in the `mysql` client by using either name in the initial Aurora MySQL version 3 release. You can use only the new names when modifying values in a custom parameter group. The old parameter names are to be removed in a future release.

Name to be removed	New or preferred name
aurora_fwd_master_idle_timeout	aurora_fwd_writer_idle_timeout
aurora_fwd_master_max_connections_pct	aurora_fwd_writer_max_connections_pct
master_verify_checksum	source_verify_checksum
sync_master_info	sync_source_info
init_slave	init_replica
rpl_stop_slave_timeout	rpl_stop_replica_timeout
log_slow_slave_statements	log_slow_replica_statements
slave_max_allowed_packet	replica_max_allowed_packet
slave_compressed_protocol	replica_compressed_protocol
slave_exec_mode	replica_exec_mode
slave_type_conversions	replica_type_conversions
slave_sql_verify_checksum	replica_sql_verify_checksum
slave_parallel_type	replica_parallel_type

Name to be removed	New or preferred name	
slave_preserve_commit_order	replica_preserve_commit_order	
log_slave_updates	log_replica_updates	
slave_allow_batching	replica_allow_batching	
slave_load_tmpdir	replica_load_tmpdir	
slave_net_timeout	replica_net_timeout	
sql_slave_skip_counter	sql_replica_skip_counter	
slave_skip_errors	replica_skip_errors	
slave_checkpoint_period	replica_checkpoint_period	
slave_checkpoint_group	replica_checkpoint_group	
slave_transaction_retries	replica_transaction_retries	
slave_parallel_workers	replica_parallel_workers	
slave_pending_jobs_size_max	replica_pending_jobs_size_max	
pseudo_slave_mode	pseudo_replica_mode	

The following stored procedures have new names in Aurora MySQL version 3.

For compatibility, you can use either name in the initial Aurora MySQL version 3 release. The old procedure names are to be removed in a future release.

Name to be removed	New or preferred name	
mysql.rds_set_master_auto_position	mysql.rds_set_source_auto_position	
mysql.rds_set_external_master	mysql.rds_set_external_source	
mysql.rds_set_external_master_with_auto_position	mysql.rds_set_external_source_with_auto_position	
mysql.rds_reset_external_master	mysql.rds_reset_external_source	
mysql.rds_next_master_log	mysql.rds_next_source_log	

AUTO_INCREMENT values

In Aurora MySQL version 3, Aurora preserves the AUTO_INCREMENT value for each table when it restarts each DB instance. In Aurora MySQL version 2, the AUTO_INCREMENT value wasn't preserved after a restart.

The AUTO_INCREMENT value isn't preserved when you set up a new cluster by restoring from a snapshot, performing a point-in-time recovery, and cloning a cluster. In these cases, the AUTO_INCREMENT value is initialized to the value based on the largest column value in the table at the time the snapshot was created. This behavior is different than in RDS for MySQL 8.0, where the AUTO_INCREMENT value is preserved during these operations.

Binary log replication

In MySQL 8.0 community edition, binary log replication is turned on by default. In Aurora MySQL version 3, binary log replication is turned off by default.

> **Tip**
>
> If your high availability requirements are fulfilled by the Aurora built-in replication features, you can leave binary log replication turned off. That way, you can avoid the performance

overhead of binary log replication. You can also avoid the associated monitoring and troubleshooting that are needed to manage binary log replication.

Aurora supports binary log replication from a MySQL 5.7–compatible source to Aurora MySQL version 3. The source system can be an Aurora MySQL DB cluster, an RDS for MySQL DB instance, or an on-premises MySQL instance.

As does community MySQL, Aurora MySQL supports replication from a source running a specific version to a target running the same major version or one major version higher. For example, replication from a MySQL 5.6–compatible system to Aurora MySQL version 3 isn't supported. Replicating from Aurora MySQL version 3 to a MySQL 5.7–compatible or MySQL 5.6–compatible system isn't supported. For details about using binary log replication, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

Aurora MySQL version 3 includes improvements to binary log replication in community MySQL 8.0, such as filtered replication. For details about the community MySQL 8.0 improvements, see How Servers Evaluate Replication Filtering Rules in the *MySQL Reference Manual*.

Transaction compression for binary log replication

For usage information about binary log compression, see Binary Log Transaction Compression in the MySQL Reference Manual.

The following limitations apply to binary log compression in Aurora MySQL version 3:

- Transactions whose binary log data is larger than the maximum allowed packet size aren't compressed. This is true regardless of whether the Aurora MySQL binary log compression setting is turned on. Such transactions are replicated without being compressed.
- If you use a connector for change data capture (CDC) that doesn't support MySQL 8.0 yet, you can't use this feature. We recommend that you test any third-party connectors thoroughly with binary log compression. Also, we recommend that you do so before turning on binlog compression on systems that use binlog replication for CDC.

Comparing Aurora MySQL version 3 and MySQL 8.0 Community Edition

You can use the following information to learn about the changes to be aware of when you convert from a different MySQL 8.0–compatible system to Aurora MySQL version 3.

In general, Aurora MySQL version 3 supports the feature set of community MySQL 8.0.23. Some new features from MySQL 8.0 community edition don't apply to Aurora MySQL. Some of those features aren't compatible with some aspect of Aurora, such as the Aurora storage architecture. Other features aren't needed because the Amazon RDS management service provides equivalent functionality. The following features in community MySQL 8.0 aren't supported or work differently in Aurora MySQL version 3.

For release notes for all Aurora MySQL version 3 releases, see Database engine updates for Amazon Aurora MySQL version 3 in the *Release Notes for Aurora MySQL*.

Topics

- MySQL 8.0 features not available in Aurora MySQL version 3
- Role-based privilege model
- Finding the database server ID
- Authentication

MySQL 8.0 features not available in Aurora MySQL version 3

The following features from community MySQL 8.0 aren't available or work differently in Aurora MySQL version 3.

- Resource groups and associated SQL statements aren't supported in Aurora MySQL.
- Aurora MySQL doesn't support user-defined undo tablespaces and associated SQL statements, such as `CREATE UNDO TABLESPACE`, `ALTER UNDO TABLESPACE ... SET INACTIVE`, and `DROP UNDO TABLESPACE`.
- Aurora MySQL doesn't support undo tablespace truncation for Aurora MySQL versions lower than 3.06. In Aurora MySQL version 3.06 and higher, automated undo tablespace truncation is supported.
- Password validation plugin is supported.
- You can't modify the settings of any MySQL plugins, including password validation plugin.
- The X plugin isn't supported.
- Multisource replication isn't supported.

Role-based privilege model

With Aurora MySQL version 3, you can't modify the tables in the `mysql` database directly. In particular, you can't set up users by inserting into the `mysql.user` table. Instead, you use SQL statements to grant role-based privileges. You also can't create other kinds of objects such as stored procedures in the `mysql` database. You can still query the `mysql` tables. If you use binary log replication, changes made directly to the `mysql` tables on the source cluster aren't replicated to the target cluster.

In some cases, your application might use shortcuts to create users or other objects by inserting into the `mysql` tables. If so, change your application code to use the corresponding statements such as `CREATE USER`. If your application creates stored procedures or other objects in the `mysql` database, use a different database instead.

To export metadata for database users during the migration from an external MySQL database, you can use a MySQL Shell command instead of `mysqldump`. For more information, see Instance Dump Utility, Schema Dump Utility, and Table Dump Utility.

To simplify managing permissions for many users or applications, you can use the `CREATE ROLE` statement to create a role that has a set of permissions. Then you can use the `GRANT` and `SET ROLE` statements and the `current_role` function to assign roles to users or applications, switch the current role, and check which roles are in effect. For more information on the role-based permission system in MySQL 8.0, see Using Roles in the MySQL Reference Manual.

> **Important**
>
> We strongly recommend that you do not use the master user directly in your applications. Instead, adhere to the best practice of using a database user created with the minimal privileges required for your application.

Topics

- rds_superuser_role
- Privilege checks user for binary log replication
- Roles for accessing other Amazon services

rds_superuser_role

Aurora MySQL version 3 includes a special role that has all of the following privileges. This role is named `rds_superuser_role`. The primary administrative user for each cluster already has this role granted. The `rds_superuser_role` role includes the following privileges for all database objects:

- `ALTER`
- `APPLICATION_PASSWORD_ADMIN`
- `ALTER ROUTINE`
- `CONNECTION_ADMIN`
- `CREATE`
- `CREATE ROLE`
- `CREATE ROUTINE`
- `CREATE TEMPORARY TABLES`
- `CREATE USER`
- `CREATE VIEW`
- `DELETE`
- `DROP`
- `DROP ROLE`
- `EVENT`
- `EXECUTE`
- `FLUSH_OPTIMIZER_COSTS` (Aurora MySQL version 3.09 and higher)
- `FLUSH_STATUS` (Aurora MySQL version 3.09 and higher)
- `FLUSH_TABLES` (Aurora MySQL version 3.09 and higher)
- `FLUSH_USER_RESOURCES` (Aurora MySQL version 3.09 and higher)
- `INDEX`
- `INSERT`
- `LOCK TABLES`
- `PROCESS`

- REFERENCES
- RELOAD
- REPLICATION CLIENT
- REPLICATION SLAVE
- ROLE_ADMIN
- SET_USER_ID
- SELECT
- SHOW DATABASES
- SHOW_ROUTINE (Aurora MySQL version 3.04 and higher)
- SHOW VIEW
- TRIGGER
- UPDATE
- XA_RECOVER_ADMIN

The role definition also includes WITH GRANT OPTION so that an administrative user can grant that role to other users. In particular, the administrator must grant any privileges needed to perform binary log replication with the Aurora MySQL cluster as the target.

Tip

To see the full details of the permissions, enter the following statements.

```
SHOW GRANTS FOR rds_superuser_role@'%';
SHOW GRANTS FOR name_of_administrative_user_for_your_cluster@'%';
```

Privilege checks user for binary log replication

Aurora MySQL version 3 includes a privilege checks user for binary log (binlog) replication, rdsrepladmin_priv_checks_user. In addition to the privileges of rds_superuser_role, this user has the replication_applier privilege.

When you turn on binlog replication by calling the mysql.rds_start_replication stored procedure, rdsrepladmin_priv_checks_user is created.

The `rdsrepladmin_priv_checks_user@localhost` user is a reserved user. Don't modify it.

Roles for accessing other Amazon services

Aurora MySQL version 3 includes roles that you can use to access other Amazon services. You can set many of these roles as an alternative to granting privileges. For example, you specify `GRANT AWS_LAMBDA_ACCESS TO user` instead of `GRANT INVOKE LAMBDA ON *.* TO user`. For the procedures to access other Amazon services, see Integrating Amazon Aurora MySQL with other Amazon services. Aurora MySQL version 3 includes the following roles related to accessing other Amazon services:

- `AWS_LAMBDA_ACCESS` – An alternative to the `INVOKE LAMBDA` privilege. For usage information, see Invoking a Lambda function from an Amazon Aurora MySQL DB cluster.
- `AWS_LOAD_S3_ACCESS` – An alternative to the `LOAD FROM S3` privilege. For usage information, see Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket.
- `AWS_SELECT_S3_ACCESS` – An alternative to the `SELECT INTO S3` privilege. For usage information, see Saving data from an Amazon Aurora MySQL DB cluster into text files in an Amazon S3 bucket.
- `AWS_COMPREHEND_ACCESS` – An alternative to the `INVOKE COMPREHEND` privilege. For usage information, see Granting database users access to Aurora machine learning.
- `AWS_SAGEMAKER_ACCESS` – An alternative to the `INVOKE SAGEMAKER` privilege. For usage information, see Granting database users access to Aurora machine learning.
- `AWS_BEDROCK_ACCESS` – There's no analogous `INVOKE` privilege for Amazon Bedrock. For usage information, see Granting database users access to Aurora machine learning.

When you grant access by using roles in Aurora MySQL version 3, you also activate the role by using the `SET ROLE role_name` or `SET ROLE ALL` statement. The following example shows how. Substitute the appropriate role name for `AWS_SELECT_S3_ACCESS`.

```
# Grant role to user.

mysql> GRANT AWS_SELECT_S3_ACCESS TO 'user'@'domain-or-ip-address'

# Check the current roles for your user. In this case, the AWS_SELECT_S3_ACCESS role
 has not been activated.
# Only the rds_superuser_role is currently in effect.
mysql> SELECT CURRENT_ROLE();
```

```
+--------------------------+
| CURRENT_ROLE()           |
+--------------------------+
| `rds_superuser_role`@`%` |
+--------------------------+
1 row in set (0.00 sec)

# Activate all roles associated with this user using SET ROLE.
# You can activate specific roles or all roles.
# In this case, the user only has 2 roles, so we specify ALL.
mysql> SET ROLE ALL;
Query OK, 0 rows affected (0.00 sec)

# Verify role is now active
mysql> SELECT CURRENT_ROLE();
+-----------------------------------------------------+
| CURRENT_ROLE()                                      |
+-----------------------------------------------------+
| `AWS_SELECT_S3_ACCESS`@`%`,`rds_superuser_role`@`%` |
+-----------------------------------------------------+
```

Finding the database server ID

The database server ID (`server_id`) is required for binary logging (binlog) replication. The way to find the server ID is different in Aurora MySQL from Community MySQL.

In Community MySQL, the server ID is a number, which you obtain by using the following syntax while logged into the server:

```
mysql> select @@server_id;

+-------------+
| @@server_id |
+-------------+
| 2           |
+-------------+
1 row in set (0.00 sec)
```

In Aurora MySQL, the server ID is the DB instance ID, which you obtain by using the following syntax while logged into the DB instance:

```
mysql> select @@aurora_server_id;
```

```
+------------------------+
| @@aurora_server_id     |
+------------------------+
| mydbcluster-instance-2 |
+------------------------+
1 row in set (0.00 sec)
```

For more information on binlog replication, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

Authentication

In community MySQL 8.0, the default authentication plugin is `caching_sha2_password`. Aurora MySQL version 3 still uses the `mysql_native_password` plugin. You can't change the `default_authentication_plugin` setting. You can, however, create new users and alter current users, and their individual passwords use the new authentication plugin. Following is an example.

```
mysql> CREATE USER 'testnewsha'@'%' IDENTIFIED WITH caching_sha2_password BY
 'aNewShaPassword';
Query OK, 0 rows affected (0.74 sec)
```

Upgrading to Aurora MySQL version 3

For information on upgrading your database from Aurora MySQL version 2 to version 3, see Upgrading the major version of an Amazon Aurora MySQL DB cluster.

Aurora MySQL version 2 compatible with MySQL 5.7

This topic describes the differences between Aurora MySQL version 2 and MySQL 5.7 Community Edition.

> **Important**
>
> Aurora MySQL version 2 reached the end of standard support on October 31, 2024. For more information, see Preparing for Amazon Aurora MySQL-Compatible Edition version 2 end of standard support.

Features not supported in Aurora MySQL version 2

The following features are supported in MySQL 5.7, but are currently not supported in Aurora MySQL version 2:

- `CREATE TABLESPACE` SQL statement
- Group replication plugin
- Increased page size
- InnoDB buffer pool loading at startup
- InnoDB full-text parser plugin
- Multisource replication
- Online buffer pool resizing
- Password validation plugin – You can install the plugin, but it isn't supported. You can't customize the plugin.
- Query rewrite plugins
- Replication filtering
- X Protocol

For more information about these features, see the MySQL 5.7 documentation.

Temporary tablespace behavior in Aurora MySQL version 2

In MySQL 5.7, the temporary tablespace is autoextending and increases in size as necessary to accommodate on-disk temporary tables. When temporary tables are dropped, freed space can be reused for new temporary tables, but the temporary tablespace remains at the extended size and doesn't shrink. The temporary tablespace is dropped and re-created when engine is restarted.

In Aurora MySQL version 2, the following behavior applies:

- For new Aurora MySQL DB clusters created with version 2.10 and higher, the temporary tablespace is removed and re-created when you restart the database. This allows the dynamic resizing feature to reclaim the storage space.
- For existing Aurora MySQL DB clusters upgraded to:
  - Version 2.10 or higher – The temporary tablespace is removed and re-created when you restart the database. This allows the dynamic resizing feature to reclaim the storage space.

- Version 2.09 – Temporary table space isn't removed when you restart the database.

You can check the size of the temporary tablespace on your Aurora MySQL version 2 DB cluster by using the following query:

```
SELECT
    FILE_NAME,
    TABLESPACE_NAME,
    ROUND((TOTAL_EXTENTS * EXTENT_SIZE) / 1024 / 1024 / 1024, 4) AS SIZE
FROM
    INFORMATION_SCHEMA.FILES
WHERE
    TABLESPACE_NAME = 'innodb_temporary';
```

For more information, see The Temporary Tablespace in the MySQL documentation.

Storage engine for on-disk temporary tables

Aurora MySQL version 2 uses different storage engines for on-disk internal temporary tables depending on the role of the instance.

- On the writer instance, on-disk temporary tables use the InnoDB storage engine by default. They're stored in the temporary tablespace in the Aurora cluster volume.

  You can change this behavior on the writer instance by modifying the value for the DB parameter `internal_tmp_disk_storage_engine`. For more information, see Instance-level parameters.
- On reader instances, on-disk temporary tables use the MyISAM storage engine, which uses local storage. That's because read-only instances can't store any data on the Aurora cluster volume.

Security with Amazon Aurora MySQL

Security for Amazon Aurora MySQL is managed at three levels:

- To control who can perform Amazon RDS management actions on Aurora MySQL DB clusters and DB instances, you use Amazon Identity and Access Management (IAM). When you connect to Amazon using IAM credentials, your Amazon account must have IAM policies that grant the permissions required to perform Amazon RDS management operations. For more information, see Identity and access management for Amazon Aurora

  If you are using IAM to access the Amazon RDS console, make sure to first sign in to the Amazon Web Services Management Console with your IAM user credentials. Then go to the Amazon RDS console at https://console.amazonaws.cn/rds/.
- Make sure to create Aurora MySQL DB clusters in a virtual public cloud (VPC) based on the Amazon VPC service. To control which devices and Amazon EC2 instances can open connections to the endpoint and port of the DB instance for Aurora MySQL DB clusters in a VPC, use a VPC security group. You can make these endpoint and port connections by using Transport Layer Security (TLS). In addition, firewall rules at your company can control whether devices running at your company can open connections to a DB instance. For more information on VPCs, see Amazon VPC and Amazon Aurora.

  The supported VPC tenancy depends on the DB instance class used by your Aurora MySQL DB clusters. With `default` VPC tenancy, the VPC runs on shared hardware. With `dedicated` VPC tenancy, the VPC runs on a dedicated hardware instance. The burstable performance DB instance classes support default VPC tenancy only. The burstable performance DB instance classes include the db.t2, db.t3, and db.t4g DB instance classes. All other Aurora MySQL DB instance classes support both default and dedicated VPC tenancy.

  > **Note**
  >
  > We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see Using T instance classes for development and testing.

  For more information about instance classes, see Amazon AuroraDB instance classes. For more information about `default` and `dedicated` VPC tenancy, see Dedicated instances in the *Amazon Elastic Compute Cloud User Guide*.

- To authenticate login and permissions for an Amazon Aurora MySQL DB cluster, you can take either of the following approaches, or a combination of them:
  - You can take the same approach as with a standalone instance of MySQL.

    Commands such as `CREATE USER`, `RENAME USER`, `GRANT`, `REVOKE`, and `SET PASSWORD` work just as they do in on-premises databases, as does directly modifying database schema tables. For more information, see Access control and account management in the MySQL documentation.
  - You can also use IAM database authentication.

    With IAM database authentication, you authenticate to your DB cluster by using an IAM user or IAM role and an authentication token. An *authentication token* is a unique value that is generated using the Signature Version 4 signing process. By using IAM database authentication, you can use the same credentials to control access to your Amazon resources and your databases. For more information, see IAM database authentication .

> **Note**
>
> For more information, see Security in Amazon Aurora.

In the following sections, see information about user permissions for Aurora MySQL and TLS connections with Aurora MySQL DB clusters.

Topics

- Master user privileges with Amazon Aurora MySQL
- TLS connections to Aurora MySQL DB clusters
- Reserved users in Aurora MySQL
- Password policies and Password validation in Aurora MySQL

Master user privileges with Amazon Aurora MySQL

When you create an Amazon Aurora MySQL DB instance, the master user has the default privileges listed in Master user account privileges.

To provide management services for each DB cluster, the `admin` and `rdsadmin` users are created when the DB cluster is created. Attempting to drop, rename, change the password, or change privileges for the `rdsadmin` account results in an error.

In Aurora MySQL version 2 DB clusters, the `admin` and `rdsadmin` users are created when the DB cluster is created. In Aurora MySQL version 3 DB clusters, the `admin`, `rdsadmin`, and `rds_superuser_role` users are created.

> **Important**
>
> We strongly recommend that you do not use the master user directly in your applications. Instead, adhere to the best practice of using a database user created with the minimal privileges required for your application.

You can choose between multiple authentication methods for your master user when creating or modifying your DB cluster:

- IAM database authentication
- Password management with Amazon Aurora and Amazon Secrets Manager
- Self-managed password-based authentication

Starting Aurora MySQL version 8.4, when resetting the master user password via the Amazon Web Services Management Console, CLI, or API, or through Amazon Secrets Manager rotation, Aurora automatically uses the authentication plugin defined by the current `authentication_policy` parameter value at the time of the reset. In Aurora MySQL version 2 and 3, the `mysql_native_password` plugin is always used.

For management of the Aurora MySQL DB cluster, the standard `kill` and `kill_query` commands have been restricted. Instead, use the Amazon RDS commands `rds_kill` and `rds_kill_query` to terminate user sessions or queries on Aurora MySQL DB instances.

> **Note**
>
> Encryption of a database instance and snapshots is not supported for the China (Ningxia) region.

TLS connections to Aurora MySQL DB clusters

Amazon Aurora MySQL DB clusters support Transport Layer Security (TLS) connections from applications using the same process and public key as RDS for MySQL DB instances.

Amazon RDS creates an TLS certificate and installs the certificate on the DB instance when Amazon RDS provisions the instance. These certificates are signed by a certificate authority. The TLS certificate includes the DB instance endpoint as the Common Name (CN) for the TLS certificate to guard against spoofing attacks. As a result, you can only use the DB cluster endpoint to connect to a DB cluster using TLS if your client supports Subject Alternative Names (SAN). Otherwise, you must use the instance endpoint of a writer instance.

For information about downloading certificates, see Using SSL/TLS to encrypt a connection to a DB cluster.

We recommend the Amazon JDBC Driver as a client that supports SAN with TLS. For more information about the Amazon JDBC Driver and complete instructions for using it, see the Amazon Web Services (Amazon) JDBC Driver GitHub repository.

Topics

- Requiring a TLS connection to an Aurora MySQL DB cluster
- TLS versions for Aurora MySQL
- Configuring cipher suites for connections to Aurora MySQL DB clusters
- Encrypting connections to an Aurora MySQL DB cluster

Requiring a TLS connection to an Aurora MySQL DB cluster

You can require that all user connections to your Aurora MySQL DB cluster use TLS by using the `require_secure_transport` DB cluster parameter. By default, the `require_secure_transport` parameter is set to `ON` in Aurora MySQL version 8.4, while it is set to `OFF` in Aurora MySQL versions 2 and 3. You can set the `require_secure_transport` parameter to `ON` to require TLS for connections to your DB cluster.

You can set the `require_secure_transport` parameter value by updating the DB cluster parameter group for your DB cluster. You don't need to reboot your DB cluster for the change to take effect. For more information on parameter groups, see Parameter groups for Amazon Aurora.

> **Note**
>
> The `require_secure_transport` parameter is available for Aurora MySQL versions 2 and above. You can set this parameter in a custom DB cluster parameter group. The parameter isn't available in DB instance parameter groups.

When the `require_secure_transport` parameter is set to `ON` for a DB cluster, a database client can connect to it if it can establish an encrypted connection. Otherwise, an error message similar to the following is returned to the client:

```
MySQL Error 3159 (HY000): Connections using insecure transport are prohibited while --
require_secure_transport=ON.
```

TLS versions for Aurora MySQL

Aurora MySQL supports Transport Layer Security (TLS) versions 1.0, 1.1, 1.2, and 1.3. Starting in Aurora MySQL version 3.04.0 and higher, you can use the TLS 1.3 protocol to secure your connections. The following table shows the TLS support for Aurora MySQL versions.

Aurora MySQL version	TLS 1.0	TLS 1.1	TLS 1.2	TLS 1.3	Default
Aurora MySQL version 2	Deprecated	Deprecated	Supported	Not supported	TLS 1.2
Aurora MySQL version 3 (lower than 3.04.0)	Deprecated	Deprecated	Supported	Not supported	TLS 1.2
Aurora MySQL version 3	Not supported	Not supported	Supported	Supported	TLS 1.2, TLS 1.3

Aurora MySQL version	TLS 1.0	TLS 1.1	TLS 1.2	TLS 1.3	Default
(3.04.0 and higher)					
Aurora MySQL version 8.4	Not supported	Not supported	Supported	Supported	TLS 1.2, TLS 1.3
Aurora MySQL version 8.4	Not supported	Not supported	Supported	Supported	All supported TLS versions

Important

If you're using custom parameter groups for your Aurora MySQL clusters with version 2 and versions lower than 3.04.0, we recommend using TLS 1.2 because TLS 1.0 and 1.1 are less secure. The community edition of MySQL 8.0.26 and Aurora MySQL 3.03 and its minor versions deprecated support for TLS versions 1.1 and 1.0.
The community edition of MySQL 8.0.28 and compatible Aurora MySQL versions 3.04.0 and higher do not support TLS 1.1 and TLS 1.0. If you're using Aurora MySQL version 3.04.0 or higher, do not set the TLS protocol to 1.0 and 1.1 in your custom parameter group.
For Aurora MySQL versions 3.04.0 and higher, the default setting is TLS 1.3 and TLS 1.2.

You can use the `tls_version` DB cluster parameter to indicate the permitted protocol versions. Similar client parameters exist for most client tools or database drivers. Some older clients might not support newer TLS versions. By default, the DB cluster attempts to use the highest TLS protocol version allowed by both the server and client configuration.

Set the `tls_version` DB cluster parameter to one of the following values:

- `TLSv1.3`
- `TLSv1.2`
- `TLSv1.1`

- TLSv1

You can also set the `tls_version` parameter as a string of comma-separated list. If you want to use both TLS 1.2 and TLS 1.3 protocols, the `tls_version` parameter must include all protocols from the lowest to the highest protocol. In this case, `tls_version` is set as:

```
tls_version=TLSv1.2,TLSv1.3
```

For information about modifying parameters in a DB cluster parameter group, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora. If you use the Amazon CLI to modify the `tls_version` DB cluster parameter, the `ApplyMethod` must be set to `pending-reboot`. When the application method is `pending-reboot`, changes to parameters are applied after you stop and restart the DB clusters associated with the parameter group.

Configuring cipher suites for connections to Aurora MySQL DB clusters

By using configurable cipher suites, you can have more control over the security of your database connections. You can specify a list of cipher suites that you want to allow to secure client TLS connections to your database. With configurable cipher suites, you can control the connection encryption that your database server accepts. Doing this prevents the use of insecure or deprecated ciphers.

Configurable cipher suites are supported in Aurora MySQL version 2 and above. To specify the list of permissible TLS 1.2, TLS 1.1, TLS 1.0 ciphers for encrypting connections, modify the `ssl_cipher` cluster parameter. Set the `ssl_cipher` parameter in a cluster parameter group using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Aurora MySQL version 8.4 only supports ciphers aligned with modern cryptographic standards. Only GCM and CCM mode ciphers are supported. All other cipher modes, including CBC and CHACHA20-POLY1305, are not supported.

Set the `ssl_cipher` parameter to a string of comma-separated cipher values for your TLS version. For the client application, you can specify the ciphers to use for encrypted connections by using the `--ssl-cipher` option when connecting to the database. For more about connecting to your database, see Connecting to an Amazon Aurora MySQL DB cluster.

Starting in Aurora MySQL version 3.04.0 and higher, you can specify TLS 1.3 cipher suites. To specify the permissible TLS 1.3 cipher suites, modify the `tls_ciphersuites` parameter in your parameter group. TLS 1.3 has reduced the number of available cipher suites due to changes in

the naming convention that removes the key exchange mechanism and certificate used. Set the `tls_ciphersuites` to a string of comma-separated cipher values for TLS 1.3.

The following table shows the supported ciphers along with the TLS encryption protocol and valid Aurora MySQL engine versions for each cipher.

Cipher	Aurora MySQL 2.11.0+	Aurora MySQL 3.04.0+	Aurora MySQL 8.4.7+
TLS 1.0 Ciphers			
ECDHE-RSA-AES128-SHA	✓	✓	X
ECDHE-RSA-AES256-SHA	✓	✓	X
ECDHE-ECDSA-AES128-SHA	✓	✓	X
ECDHE-ECDSA-AES256-SHA	✓	✓	X
TLS 1.2 Ciphers			
ECDHE-RSA-AES128-GCM-SHA256	✓	✓	✓
ECDHE-RSA-AES256-GCM-SHA384	✓	✓	✓
ECDHE-ECDSA-AES128-GCM-SHA256	✓	✓	✓
ECDHE-ECDSA-AES256-GCM-SHA384	✓	✓	✓
ECDHE-RSA-AES128-SHA256	✓	✓	X
ECDHE-RSA-CHACHA20-POLY1305	✓	✓	X

Cipher	Aurora MySQL 2.11.0+	Aurora MySQL 3.04.0+	Aurora MySQL 8.4.7+
ECDHE-ECDSA-CHACHA20-POLY1305	✓	✓	X
TLS 1.3 Ciphers			
TLS_AES_128_GCM_SHA256	X	✓	✓
TLS_AES_256_GCM_SHA384	X	✓	✓
TLS_CHACHA20_POLY1305_SHA256	X	✓	X

Important

Before upgrading to Aurora MySQL version 8.4, verify that your applications support the updated cipher suites. Applications using TLS 1.0/1.1 or unsupported ciphers will not connect after upgrading if you have set the `require_secure_transport` parameter to `ON`.

For information about modifying parameters in a DB cluster parameter group, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora. If you use the CLI to modify the `ssl_cipher` DB cluster parameter, make sure to set the `ApplyMethod` to `pending-reboot`. When the application method is `pending-reboot`, changes to parameters are applied after you stop and restart the DB clusters associated with the parameter group.

You can also use the describe-engine-default-cluster-parameters CLI command to determine which cipher suites are currently supported for a specific parameter group family. The following example shows how to get the allowed values for the `ssl_cipher` cluster parameter for Aurora MySQL version 2.

```
aws rds describe-engine-default-cluster-parameters --db-parameter-group-family aurora-mysql5.7
```

```
        ...some output truncated...
 {
        "ParameterName": "ssl_cipher",
        "ParameterValue": "ECDHE-RSA-AES128-SHA,ECDHE-RSA-AES128-SHA256,ECDHE-RSA-
AES128-GCM-SHA256,ECDHE-RSA-AES256-SHA,ECDHE-RSA-AES256-GCM-SHA384,ECDHE-RSA-CHACHA20-
POLY1305,ECDHE-ECDSA-AES256-SHA,ECDHE-ECDSA-CHACHA20-POLY1305,ECDHE-ECDSA-AES256-GCM-
SHA384,ECDHE-ECDSA-AES128-GCM-SHA256,ECDHE-ECDSA-AES128-SHA",
        "Description": "The list of permissible ciphers for connection encryption.",
        "Source": "system",
        "ApplyType": "static",
        "DataType": "list",
        "AllowedValues": "ECDHE-RSA-AES128-SHA,ECDHE-RSA-AES128-SHA256,ECDHE-RSA-
AES128-GCM-SHA256,ECDHE-RSA-AES256-SHA,ECDHE-RSA-AES256-GCM-SHA384,ECDHE-RSA-CHACHA20-
POLY1305,ECDHE-ECDSA-AES256-SHA,ECDHE-ECDSA-CHACHA20-POLY1305,ECDHE-ECDSA-AES256-GCM-
SHA384,ECDHE-ECDSA-AES128-GCM-SHA256,ECDHE-ECDSA-AES128-SHA",
        "IsModifiable": true,
        "SupportedEngineModes": [
            "provisioned"
        ]
    },
       ...some output truncated...
```

For more information about ciphers, see the ssl_cipher variable in the MySQL documentation. For more information about cipher suite formats, see the openssl-ciphers list format and openssl-ciphers string format documentation on the OpenSSL website.

Encrypting connections to an Aurora MySQL DB cluster

To encrypt connections using the default `mysql` client, launch the mysql client using the `--ssl-ca` parameter to reference the public key, for example:

For MySQL 5.7 and 8.0:

```
mysql -h myinstance.123456789012.rds-cn-north-1.amazonaws.com
--ssl-ca=full_path_to_CA_certificate --ssl-mode=VERIFY_IDENTITY
```

For MySQL 5.6:

```
mysql -h myinstance.123456789012.rds-cn-north-1.amazonaws.com
--ssl-ca=full_path_to_CA_certificate --ssl-verify-server-cert
```

Replace *full_path_to_CA_certificate* with the full path to your Certificate Authority (CA) certificate. For information about downloading a certificate, see Using SSL/TLS to encrypt a connection to a DB cluster.

You can require TLS connections for specific users accounts. For example, you can use one of the following statements, depending on your MySQL version, to require TLS connections on the user account `encrypted_user`.

For MySQL 5.7 and 8.0:

```
ALTER USER 'encrypted_user'@'%' REQUIRE SSL;
```

For MySQL 5.6:

```
GRANT USAGE ON *.* TO 'encrypted_user'@'%' REQUIRE SSL;
```

When you use an RDS Proxy, you connect to the proxy endpoint instead of the usual cluster endpoint. You can make SSL/TLS required or optional for connections to the proxy, in the same way as for connections directly to the Aurora DB cluster. For information about using RDS Proxy, see Amazon RDS Proxy for Aurora.

> **Note**
>
> For more information on TLS connections with MySQL, see the MySQL documentation.

Reserved users in Aurora MySQL

The following usernames are reserved for Aurora MySQL features and cannot be used for your database user accounts:

- `rdsadmin`
- `rdsproxyadmin`
- `rdsrepladmin`
- `rdsrepladmin_priv_checks_user`
- `rds_superuser_role`
- `AWS_COMPREHEND_ACCESS`

- AWS_LAMBDA_ACCESS
- AWS_LOAD_S3_ACCESS
- AWS_SAGEMAKER_ACCESS
- AWS_SELECT_S3_ACCESS
- AWS_BEDROCK_ACCESS

Starting in Aurora MySQL version 8.4.7, you can't CREATE, DROP, RENAME, GRANT, REVOKE, or SET PASSWORD for the rdsproxyadmin user. Enforcement applies at any host, including rdsproxyadmin@%, rdsproxyadmin@localhost, and specific hosts or IP addresses. These operations return an error similar to the following:

```
mysql> DROP USER 'rdsproxyadmin'@'%';
ERROR 1396 (HY000): Operation DROP USER failed for 'rdsproxyadmin'@'%'

mysql> GRANT SELECT ON testdb.* TO 'rdsproxyadmin'@'%';
ERROR 1132 (42000): Access denied on rdsproxyadmin
```

The rdsproxyadmin account is created automatically the first time you register a proxy target for your DB cluster. For more information about the RDS Proxy monitoring user, see Amazon RDS Proxy for Aurora.

Password policies and Password validation in Aurora MySQL

Topics

- Password policies
- Using the validate_password component
- Related documentation

Password policies

Aurora MySQL supports the following MySQL password policy features. For more information on these policies, see MySQL Password Management documentation.

Password expiration

Password expiration parameters

Parameter/Clause	Notes
Cluster parameter `default_password_lifetime`	Available in Aurora MySQL version 3 (compatible with MySQL 8.0) and higher.
Per account DCL clause `PASSWORD EXPIRE INTERVAL N DAY`	None
Per account DCL clause `PASSWORD EXPIRE NEVER`	None
Per account DCL clause `PASSWORD EXPIRE DEFAULT`	None
Cluster parameter `disconnect_on_expired_password`	Available in Aurora MySQL version 8.4 and higher.

Password reuse restrictions

Password reuse restriction parameters

Parameter/Clause	Notes
Cluster parameter `password_history`	Available in Aurora MySQL version 8.4 and higher.
Cluster parameter `password_reuse_interval`	Available in Aurora MySQL version 8.4 and higher.
Per account DCL clause `PASSWORD HISTORY N`	None
Per account DCL clause `PASSWORD REUSE INTERVAL N DAY`	None
Per account DCL clause `PASSWORD HISTORY DEFAULT`	None

Current password verification

Current password verification parameters

Parameter/Clause	Notes
Parameter `password_require_current`	Available in Aurora MySQL version 8.4 and higher.
Per account DCL clause `PASSWORD REQUIRE CURRENT`	None
Per account DCL clause `PASSWORD REQUIRE CURRENT OPTIONAL`	None
Per account DCL clause `PASSWORD REQUIRE CURRENT DEFAULT`	None

Dual password support

Dual password support clauses

Parameter/Clause	Notes
Per account DCL clause `RETAIN CURRENT PASSWORD`	None
Per account DCL clause `DISCARD OLD PASSWORD`	None

Failed-login tracking and temporary account locking

Failed-login tracking clauses

Parameter/Clause	Notes
Per account DCL clause `FAILED_LOGIN_ATTEMPTS N`	None
Per account DCL clause `PASSWORD_LOCK_TIME N`	None
Per account DCL clause `PASSWORD_LOCK_TIME UNBOUNDED`	None

Using the validate_password component

The `validate_password` component is a MySQL server component that provides password strength validation and enforcement capabilities. It tests passwords against configurable rules to ensure they meet the specified security requirements before being accepted.

When enabled, the `validate_password` component automatically validates passwords during:

- User account creation (`CREATE USER`)
- Password changes (`ALTER USER`, `SET PASSWORD`)

This helps organizations maintain strong password hygiene across their database users and comply with security policies and regulatory requirements.

Aurora MySQL version 8.4 provides a parameter-based approach to enable and manage the `validate_password` component, eliminating the need for manual `INSTALL COMPONENT` and `UNINSTALL COMPONENT` commands.

Enabling the validate_password component

To enable password validation in your Aurora MySQL cluster, use the cluster parameter:

Parameter name: `aurora_enable_validate_password_component`

To enable: Set `aurora_enable_validate_password_component` to `true` (or `1`) in your DB cluster parameter group.

To disable: Set `aurora_enable_validate_password_component` to `false` (or `0`) in your DB cluster parameter group.

> **Note**
>
> You will not be able to use the `INSTALL/UNINSTALL COMPONENT` commands for the `validate_password` component.

> **Note**
>
> Starting from Aurora MySQL version 8.4, the `validate_password` component is not listed in the `mysql.component` table. You can see the status of the component in your DB cluster parameter group or through the global variable `aurora_enable_validate_password_component`:
>
> ```
> SELECT @@global.aurora_enable_validate_password_component;
> ```

Supported validate_password component parameters

validate_password component parameters

Parameter name	Notes
`validate_password.check_user_name`	Available in Aurora MySQL version 8.4 and higher.
`validate_password.length`	Available in Aurora MySQL version 8.4 and higher.
`validate_password.mixed_case_count`	Available in Aurora MySQL version 8.4 and higher.
`validate_password.number_count`	Available in Aurora MySQL version 8.4 and higher.
`validate_password.policy`	Available in Aurora MySQL version 8.4 and higher. Only LOW and MEDIUM levels are supported.
`validate_password.special_char_count`	Available in Aurora MySQL version 8.4 and higher.

For more information on MySQL validate_password parameters, see MySQL Password Validation Options and Variables documentation.

validate_password plugin and component migration from RDS for MySQL or Aurora MySQL version 3 to Aurora MySQL version 8.4

Starting from Aurora MySQL version 8.4, if you had previously installed the `validate_password` plugin through the `INSTALL PLUGIN` command, you can migrate to the `validate_password` component. Enable the parameter `aurora_enable_validate_password_component` and then remove the plugin through the `UNINSTALL PLUGIN` command on your writer instance.

> **Note**
>
> If you have both the plugin installed and the parameter `aurora_enable_validate_password_component` enabled, the `validate_password` component will take precedence over the plugin.

If you previously installed the `validate_password` component manually using `INSTALL COMPONENT 'file://component_validate_password'`, set the `aurora_enable_validate_password_component` parameter in your target DB cluster parameter group when upgrading. After upgrading, the component will no longer be listed in the `mysql.component` table. You can use the `aurora_enable_validate_password_component` global variable to verify the status of the component.

On the first DB engine startup after upgrade, you will see the following message in your MySQL error log if you had previously installed the component manually:

```
Component 'file://component_validate_password' is being removed from mysql.component
 table.
validate_password component can be enabled/disabled through
 'aurora_enable_validate_password_component' cluster parameter.
```

Manual installation restrictions

Starting Aurora MySQL version 8.4 releases, manual `validate_password` component install and uninstall commands are not allowed:

```
mysql> INSTALL COMPONENT 'file://component_validate_password';
ERROR HY000: Cannot load component from specified URN: 'validate_password component can
 be
enabled/disabled through 'aurora_enable_validate_password_component' cluster
 parameter.'
```

Monitoring component status

Aurora MySQL logs component state changes to the MySQL error log:

When enabled:

```
Component 'validate_password' is enabled by parameter
 aurora_enable_validate_password_component
```

When disabled:

```
Component 'validate_password' is disabled by parameter
 aurora_enable_validate_password_component
```

Password validation impact on master user password

When resetting the master user password through the `modify-db-cluster` API, if the new password does not comply with the configured password validation rules, Aurora MySQL emits a customer-visible event indicating the failure. You must retry the operation with a compliant password.

Password validation impact on Amazon RDS managed master user password

For clusters using Amazon RDS-managed master user credentials stored in Amazon Secrets Manager, if the automatically generated password during rotation does not comply with the configured validation requirements, the rotation will fail. Adjust your password validation parameters to allow the rotation to succeed. We suggest not using the `validate_password` component and managed master user password together.

Related documentation

- Aurora MySQL configuration parameters
- Security with Amazon Aurora MySQL
- MySQL validate_password Component Documentation
- Parameter groups for Amazon Aurora

Updating applications to connect to Aurora MySQL DB clusters using new TLS certificates

As of January 13, 2023, Amazon RDS has published new Certificate Authority (CA) certificates for connecting to your Aurora DB clusters using Transport Layer Security (TLS). Following, you can find information about updating your applications to use the new certificates.

This topic can help you to determine whether any client applications use TLS to connect to your DB clusters. If they do, you can further check whether those applications require certificate verification to connect.

> **Note**
>
> Some applications are configured to connect to Aurora MySQL DB clusters only if they can successfully verify the certificate on the server.
> For such applications, you must update your client application trust stores to include the new CA certificates.

After you update your CA certificates in the client application trust stores, you can rotate the certificates on your DB clusters. We strongly recommend testing these procedures in a development or staging environment before implementing them in your production environments.

For more information about certificate rotation, see Rotating your SSL/TLS certificate. For more information about downloading certificates, see Using SSL/TLS to encrypt a connection to a DB cluster. For information about using TLS with Aurora MySQL DB clusters, see TLS connections to Aurora MySQL DB clusters.

Topics

- Determining whether any applications are connecting to your Aurora MySQL DB cluster using TLS
- Determining whether a client requires certificate verification to connect
- Updating your application trust store
- Example Java code for establishing TLS connections

Determining whether any applications are connecting to your Aurora MySQL DB cluster using TLS

If you are using Aurora MySQL version 2 (compatible with MySQL 5.7) and the Performance Schema is enabled, run the following query to check if connections are using TLS. For information about enabling the Performance Schema, see Performance Schema quick start in the MySQL documentation.

```
mysql> SELECT id, user, host, connection_type
       FROM performance_schema.threads pst
       INNER JOIN information_schema.processlist isp
       ON pst.processlist_id = isp.id;
```

In this sample output, you can see both your own session (`admin`) and an application logged in as `webapp1` are using TLS.

```
+----+-----------------+------------------+-----------------+
| id | user            | host             | connection_type |
+----+-----------------+------------------+-----------------+
|  8 | admin           | 10.0.4.249:42590 | SSL/TLS         |
|  4 | event_scheduler | localhost        | NULL            |
| 10 | webapp1         | 159.28.1.1:42189 | SSL/TLS         |
+----+-----------------+------------------+-----------------+
3 rows in set (0.00 sec)
```

Determining whether a client requires certificate verification to connect

You can check whether JDBC clients and MySQL clients require certificate verification to connect.

JDBC

The following example with MySQL Connector/J 8.0 shows one way to check an application's JDBC connection properties to determine whether successful connections require a valid certificate. For more information on all of the JDBC connection options for MySQL, see Configuration properties in the MySQL documentation.

When using the MySQL Connector/J 8.0, an TLS connection requires verification against the server CA certificate if your connection properties have `sslMode` set to `VERIFY_CA` or `VERIFY_IDENTITY`, as in the following example.

```
Properties properties = new Properties();
properties.setProperty("sslMode", "VERIFY_IDENTITY");
properties.put("user", DB_USER);
properties.put("password", DB_PASSWORD);
```

> **Note**
>
> If you use either the MySQL Java Connector v5.1.38 or later, or the MySQL Java Connector v8.0.9 or later to connect to your databases, even if you haven't explicitly configured your applications to use TLS when connecting to your databases, these client drivers default to using TLS. In addition, when using TLS, they perform partial certificate verification and fail to connect if the database server certificate is expired.

MySQL

The following examples with the MySQL Client show two ways to check a script's MySQL connection to determine whether successful connections require a valid certificate. For more information on all of the connection options with the MySQL Client, see Client-side configuration for encrypted connections in the MySQL documentation.

When using the MySQL 5.7 or MySQL 8.0 Client, an TLS connection requires verification against the server CA certificate if for the `--ssl-mode` option you specify `VERIFY_CA` or `VERIFY_IDENTITY`, as in the following example.

```
mysql -h mysql-database.rds.amazonaws.com -uadmin -ppassword --ssl-ca=/tmp/ssl-cert.pem
 --ssl-mode=VERIFY_CA
```

When using the MySQL 5.6 Client, an SSL connection requires verification against the server CA certificate if you specify the `--ssl-verify-server-cert` option, as in the following example.

```
mysql -h mysql-database.rds.amazonaws.com -uadmin -ppassword --ssl-ca=/tmp/ssl-cert.pem
 --ssl-verify-server-cert
```

Updating your application trust store

For information about updating the trust store for MySQL applications, see Installing SSL certificates in the MySQL documentation.

> **Note**
>
> When you update the trust store, you can retain older certificates in addition to adding the new certificates.

Updating your application trust store for JDBC

You can update the trust store for applications that use JDBC for TLS connections.

For information about downloading the root certificate, see Using SSL/TLS to encrypt a connection to a DB cluster.

For sample scripts that import certificates, see Sample script for importing certificates into your trust store.

If you are using the mysql JDBC driver in an application, set the following properties in the application.

```
System.setProperty("javax.net.ssl.trustStore", certs);
System.setProperty("javax.net.ssl.trustStorePassword", "password");
```

> **Note**
>
> Specify a password other than the prompt shown here as a security best practice.

When you start the application, set the following properties.

```
java -Djavax.net.ssl.trustStore=/path_to_truststore/MyTruststore.jks -
Djavax.net.ssl.trustStorePassword=my_truststore_password com.companyName.MyApplication
```

Example Java code for establishing TLS connections

The following code example shows how to set up the SSL connection that validates the server certificate using JDBC.

```
public class MySQLSSLTest {
```

```
        private static final String DB_USER = "user name";
        private static final String DB_PASSWORD = "password";
        // This key store has only the prod root ca.
        private static final String KEY_STORE_FILE_PATH = "file-path-to-keystore";
        private static final String KEY_STORE_PASS = "keystore-password";

    public static void test(String[] args) throws Exception {
        Class.forName("com.mysql.jdbc.Driver");


        System.setProperty("javax.net.ssl.trustStore", KEY_STORE_FILE_PATH);
        System.setProperty("javax.net.ssl.trustStorePassword", KEY_STORE_PASS);

        Properties properties = new Properties();
        properties.setProperty("sslMode", "VERIFY_IDENTITY");
        properties.put("user", DB_USER);
        properties.put("password", DB_PASSWORD);

        Connection connection = DriverManager.getConnection("jdbc:mysql://jagdeeps-ssl-
test.cni62e2e7kwh.us-east-1.rds.amazonaws.com:3306",properties);
        Statement stmt=connection.createStatement();

        ResultSet rs=stmt.executeQuery("SELECT 1 from dual");

        return;
    }
}
```

Important

After you have determined that your database connections use TLS and have updated your application trust store, you can update your database to use the rds-ca-rsa2048-g1 certificates. For instructions, see step 3 in Updating your CA certificate by modifying your DB instance .

Using Kerberos authentication for Aurora MySQL

You can use Kerberos authentication to authenticate users when they connect to your Aurora MySQL DB cluster. To do so, configure your DB cluster to use Amazon Directory Service for Microsoft Active Directory for Kerberos authentication. Amazon Directory Service for Microsoft Active Directory is also called Amazon Managed Microsoft AD. It's a feature available with Amazon Directory Service. To learn more, see What is Amazon Directory Service? in the *Amazon Directory Service Administration Guide*.

To start, create an Amazon Managed Microsoft AD directory to store user credentials. Then, provide the Active Directory's domain and other information to your Aurora MySQL DB cluster. When users authenticate with the Aurora MySQL DB cluster, authentication requests are forwarded to the Amazon Managed Microsoft AD directory.

Keeping all of your credentials in the same directory can save you time and effort. With this approach, you have a centralized location for storing and managing credentials for multiple DB clusters. Using a directory can also improve your overall security profile.

In addition, you can access credentials from your own on-premises Microsoft Active Directory. To do so, create a trusting domain relationship so that the Amazon Managed Microsoft AD directory trusts your on-premises Microsoft Active Directory. In this way, your users can access your Aurora MySQL DB clusters with the same Windows single sign-on (SSO) experience as when they access workloads in your on-premises network.

A database can use Kerberos, Amazon Identity and Access Management (IAM), or both Kerberos and IAM authentication. However, because Kerberos and IAM authentication provide different authentication methods, a specific user can log in to a database using only one or the other authentication method, but not both. For more information about IAM authentication, see IAM database authentication .

Contents

- Overview of Kerberos authentication for Aurora MySQL DB clusters
- Limitations of Kerberos authentication for Aurora MySQL
- Setting up Kerberos authentication for Aurora MySQL DB clusters
  - Step 1: Create a directory using Amazon Managed Microsoft AD
  - Step 2: (Optional) Create a trust for an on-premises Active Directory
  - Step 3: Create an IAM role for use by Amazon Aurora

- Step 4: Create and configure users
- Step 5: Create or modify an Aurora MySQL DB cluster
- Step 6: Create Aurora MySQL users that use Kerberos authentication
  - Modifying an existing Aurora MySQL login
- Step 7: Configure a MySQL client
- Step 8: (Optional) Configure case-insensitive username comparison
- Connecting to Aurora MySQL with Kerberos authentication
  - Using the Aurora MySQL Kerberos login to connect to the DB cluster
  - Kerberos authentication with Aurora global databases
  - Migrating from RDS for MySQL to Aurora MySQL
  - Preventing ticket caching
  - Logging for Kerberos authentication
- Managing a DB cluster in a domain
  - Understanding domain membership

Overview of Kerberos authentication for Aurora MySQL DB clusters

To set up Kerberos authentication for an Aurora MySQL DB cluster, complete the following general steps. These steps are described in more detail later.

1. Use Amazon Managed Microsoft AD to create an Amazon Managed Microsoft AD directory. You can use the Amazon Web Services Management Console, the Amazon CLI, or the Amazon Directory Service to create the directory. For detailed instructions, see Create your Amazon Managed Microsoft AD directory in the *Amazon Directory Service Administration Guide*.
2. Create an Amazon Identity and Access Management (IAM) role that uses the managed IAM policy `AmazonRDSDirectoryServiceAccess`. The role allows Amazon Aurora to make calls to your directory.

   For the role to allow access, the Amazon Security Token Service (Amazon STS) endpoint must be activated in the Amazon Web Services Region for your Amazon account. Amazon STS endpoints are active by default in all Amazon Web Services Regions, and you can use them without any further action. For more information, see Activating and deactivating Amazon STS in an Amazon Web Services Region in the *IAM User Guide*.

3. Create and configure users in the Amazon Managed Microsoft AD directory using the Microsoft Active Directory tools. For more information about creating users in your Active Directory, see Manage users and groups in Amazon managed Microsoft AD in the *Amazon Directory Service Administration Guide*.
4. Create or modify an Aurora MySQL DB cluster. If you use either the CLI or RDS API in the create request, specify a domain identifier with the `Domain` parameter. Use the `d-*` identifier that was generated when you created your directory and the name of the IAM role that you created.

   If you modify an existing Aurora MySQL DB cluster to use Kerberos authentication, set the domain and IAM role parameters for the DB cluster. Locate the DB cluster in the same VPC as the domain directory.
5. Use the Amazon RDS primary user credentials to connect to the Aurora MySQL DB cluster. Create the database user in Aurora MySQL by using the instructions in Step 6: Create Aurora MySQL users that use Kerberos authentication.

   Users that you create this way can log in to the Aurora MySQL DB cluster using Kerberos authentication. For more information, see Connecting to Aurora MySQL with Kerberos authentication.

To use Kerberos authentication with an on-premises or self-hosted Microsoft Active Directory, create a *forest trust*. A forest trust is a trust relationship between two groups of domains. The trust can be one-way or two-way. For more information about setting up forest trusts using Amazon Directory Service, see When to create a trust relationship in the *Amazon Directory Service Administration Guide*.

Limitations of Kerberos authentication for Aurora MySQL

The following limitations apply to Kerberos authentication for Aurora MySQL:

- Kerberos authentication is supported for Aurora MySQL version 3.03 and higher, and version 8.4.7 and higher.

  For information about Amazon Web Services Region support, see Kerberos authentication with Aurora MySQL.
- To use Kerberos authentication with Aurora MySQL, your MySQL client or connector must use version 8.0.26 or higher on Unix platforms, 8.0.27 or higher on Windows. Otherwise, the client-side `authentication_kerberos_client` plugin isn't available and you can't authenticate.

- Only Amazon Managed Microsoft AD is supported on Aurora MySQL. However, you can join Aurora MySQL DB clusters to shared Managed Microsoft AD domains owned by different accounts in the same Amazon Web Services Region.

  You can also use your own on-premises Active Directory. For more information, see Step 2: (Optional) Create a trust for an on-premises Active Directory.
- When using Kerberos to authenticate a user connecting to the Aurora MySQL cluster from MySQL clients or from drivers on the Windows operating system, by default the character case of the database username must match the case of the user in the Active Directory. For example, if the user in the Active Directory appears as `Admin`, the database username must be `Admin`.

  However, you can now use case-insensitive username comparison with the `authentication_kerberos` plugin. For more information, see Step 8: (Optional) Configure case-insensitive username comparison.
- You must reboot the reader DB instances after turning on the feature to install the `authentication_kerberos` plugin.
- Replicating to DB instances that don't support the `authentication_kerberos` plugin can lead to replication failure.
- For Aurora global databases to use Kerberos authentication, you must configure it for every DB cluster in the global database.
- The domain name must be less than 62 characters long.
- Don't modify the DB cluster port after turning on Kerberos authentication. If you modify the port, then Kerberos authentication will no longer work.
- When you enable Kerberos authentication, your DB cluster prioritizes Amazon Managed Microsoft AD DNS servers over Amazon DNS resolvers. If your Amazon Managed Microsoft AD DNS contains endpoint records for Amazon services (such as Lambda VPC endpoints), your database may resolve these services to IP addresses in your Active Directory VPC rather than your database VPC. This configuration prevents successful connections from your DB cluster to these Amazon services.

  > **Note**
  >
  > This limitation applies only if you have Amazon service VPC endpoints configured in your Amazon Managed Microsoft AD VPC.

Setting up Kerberos authentication for Aurora MySQL DB clusters

Use Amazon Managed Microsoft AD to set up Kerberos authentication for an Aurora MySQL DB cluster. To set up Kerberos authentication, take the following steps.

Topics

- Step 1: Create a directory using Amazon Managed Microsoft AD
- Step 2: (Optional) Create a trust for an on-premises Active Directory
- Step 3: Create an IAM role for use by Amazon Aurora
- Step 4: Create and configure users
- Step 5: Create or modify an Aurora MySQL DB cluster
- Step 6: Create Aurora MySQL users that use Kerberos authentication
- Step 7: Configure a MySQL client
- Step 8: (Optional) Configure case-insensitive username comparison

Step 1: Create a directory using Amazon Managed Microsoft AD

Amazon Directory Service creates a fully managed Active Directory in the Amazon Cloud. When you create an Amazon Managed Microsoft AD directory, Amazon Directory Service creates two domain controllers and Domain Name System (DNS) servers on your behalf. The directory servers are created in different subnets in a VPC. This redundancy helps make sure that your directory remains accessible even if a failure occurs.

When you create an Amazon Managed Microsoft AD directory, Amazon Directory Service performs the following tasks on your behalf:

- Sets up an Active Directory within the VPC.
- Creates a directory administrator account with the username `Admin` and the specified password. You use this account to manage your directory.

  > **Note**
  >
  > Be sure to save this password. Amazon Directory Service doesn't store it. You can reset it, but you can't retrieve it.

- Creates a security group for the directory controllers.

When you launch an Amazon Managed Microsoft AD, Amazon creates an Organizational Unit (OU) that contains all of your directory's objects. This OU has the NetBIOS name that you entered when you created your directory. It is located in the domain root, which is owned and managed by Amazon.

The `Admin` account that was created with your Amazon Managed Microsoft AD directory has permissions for the most common administrative activities for your OU, including:

- Create, update, or delete users
- Add resources to your domain, such as file or print servers, and then assign permissions for those resources to users in your OU
- Create additional OUs and containers
- Delegate authority
- Restore deleted objects from the Active Directory Recycle Bin
- Run AD and DNS Windows PowerShell modules on the Active Directory Web Service

The `Admin` account also has rights to perform the following domain-wide activities:

- Manage DNS configurations (add, remove, or update records, zones, and forwarders)
- View DNS event logs
- View security event logs

To create a directory with Amazon Managed Microsoft AD

1. Sign in to the Amazon Web Services Management Console and open the Amazon Directory Service console at https://console.amazonaws.cn/directoryservicev2/.
2. In the navigation pane, choose **Directories** and choose **Set up Directory**.
3. Choose **Amazon Managed Microsoft AD**. Amazon Managed Microsoft AD is the only option that you can currently use with Amazon RDS.
4. Enter the following information:

   Directory DNS name

   The fully qualified name for the directory, such as **`corp.example.com`**.

Directory NetBIOS name

The short name for the directory, such as **CORP**.

Directory description

(Optional) A description for the directory.

Admin password

The password for the directory administrator. The directory creation process creates an administrator account with the username Admin and this password.

The directory administrator password and can't include the word "admin." The password is case-sensitive and must be 8–64 characters in length. It must also contain at least one character from three of the following four categories:

- Lowercase letters (a–z)
- Uppercase letters (A–Z)
- Numbers (0–9)
- Non-alphanumeric characters (~!@#$%^&*_-+=`|\(){}[]:;"'<>,.?/)

Confirm password

The administrator password re-entered.

5. Choose **Next**.
6. Enter the following information in the **Networking** section and then choose **Next**:

   VPC

   The VPC for the directory. Create the Aurora MySQL DB cluster in this same VPC.

   Subnets

   Subnets for the directory servers. The two subnets must be in different Availability Zones.
7. Review the directory information and make any necessary changes. When the information is correct, choose **Create directory**.
   Directory details page during creation.

It takes several minutes to create the directory. When it has been successfully created, the **Status** value changes to **Active**.

To see information about your directory, choose the directory name in the directory listing. Note the **Directory ID** value because you need this value when you create or modify your Aurora MySQL DB cluster.
Directory ID in the Directory details page.


Step 2: (Optional) Create a trust for an on-premises Active Directory

If you don't plan to use your own on-premises Microsoft Active Directory, skip to Step 3: Create an IAM role for use by Amazon Aurora.

To use Kerberos authentication with your on-premises Active Directory, you need to create a trusting domain relationship using a forest trust between your on-premises Microsoft Active Directory and the Amazon Managed Microsoft AD directory (created in Step 1: Create a directory using Amazon Managed Microsoft AD). The trust can be one-way, where the Amazon Managed Microsoft AD directory trusts the on-premises Microsoft Active Directory. The trust can also be two-way, where both Active Directories trust each other. For more information about setting up trusts using Amazon Directory Service, see When to create a trust relationship in the *Amazon Directory Service Administration Guide*.

> **Note**
>
> If you use an on-premises Microsoft Active Directory:
>
> - Windows clients can't connect using Aurora custom endpoints. To learn more, see Amazon Aurora endpoint connections.
> - For global databases:
>   - Windows clients can connect using instance endpoints or cluster endpoints in the primary Amazon Web Services Region of the global database only.
>   - Windows clients can't connect using cluster endpoints in secondary Amazon Web Services Regions.

Make sure that your on-premises Microsoft Active Directory domain name includes a DNS suffix routing that corresponds to the newly created trust relationship. The following screenshot shows an example.

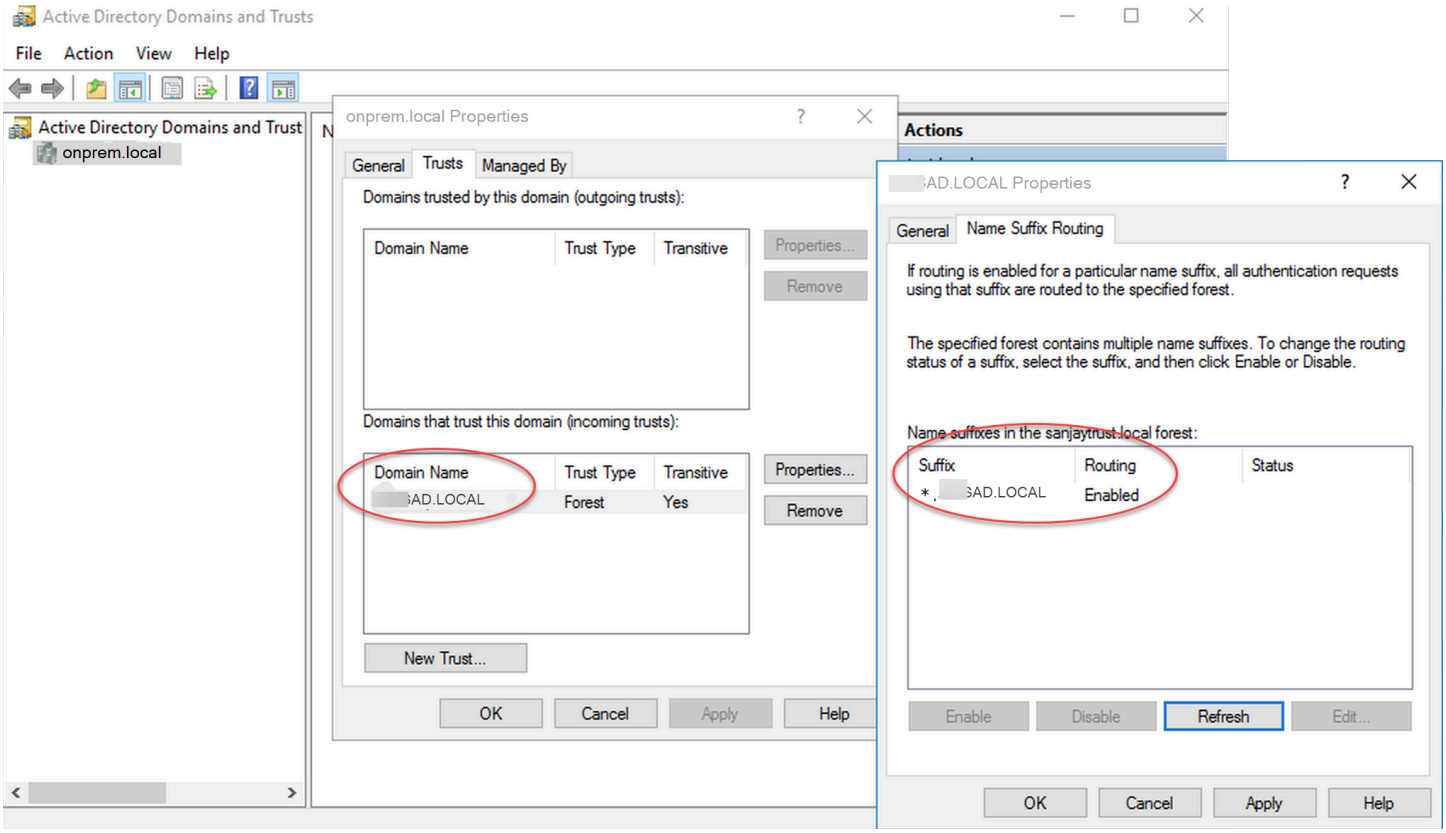

Step 3: Create an IAM role for use by Amazon Aurora

For Amazon Aurora to call Amazon Directory Service for you, you need an Amazon Identity and Access Management (IAM) role that uses the managed IAM policy `AmazonRDSDirectoryServiceAccess`. This role allows Aurora to make calls to the Amazon Directory Service.

When you create a DB cluster using the Amazon Web Services Management Console, and you have the `iam:CreateRole` permission, the console creates this role automatically. In this case, the role name is `rds-directoryservice-kerberos-access-role`. Otherwise, you must create the IAM role manually. When you create this IAM role, choose `Directory Service`, and attach the Amazon managed policy `AmazonRDSDirectoryServiceAccess` to it.

For more information about creating IAM roles for a service, see Creating a role to delegate permissions to an Amazon service in the *IAM User Guide*.

Optionally, you can create policies with the required permissions instead of using the managed IAM policy `AmazonRDSDirectoryServiceAccess`. In this case, the IAM role must have the following IAM trust policy.

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": [
          "directoryservice.rds.amazonaws.com",
          "rds.amazonaws.com"
        ]
      },
      "Action": "sts:AssumeRole"
    }
  ]
}
```

The role must also have the following IAM role policy.

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Action": [
        "ds:DescribeDirectories",
        "ds:AuthorizeApplication",
        "ds:UnauthorizeApplication",
        "ds:GetAuthorizedApplicationDetails"
      ],
    "Effect": "Allow",
    "Resource": "*"
    }
  ]
}
```

For opt-in Amazon Web Services Regions, use Region-specific service principals in IAM role trust policies. When you create a trust policy for services in these Regions, specify the Region code in the service principal.

The following example shows a trust policy that includes Region-specific service principals:

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {
        "Service": [
          "directoryservice.rds.REGION-CODE.amazonaws.com",
          "rds.REGION-CODE.amazonaws.com"
        ]
      },
      "Action": "sts:AssumeRole"
    }
  ]
}
```

Replace REGION-CODE with the code for your specific Region. For example, use the following service principals for the Asia Pacific (Melbourne) Region:

```
"Service": [
  "directoryservice.rds.ap-southeast-4.amazonaws.com",
  "rds.ap-southeast-4.amazonaws.com"
]
```

For Amazon Web Services Regions launched after Israel (Tel Aviv), starting with Canada West (Calgary), use the engine-specific service principal `directoryservice-`*`engine`*`.rds.`*`region-code`*`.amazonaws.com`, where *`engine`* is `aurora-mysql`. For example, for Canada West (Calgary) Region:

```
"Service": [
  "directoryservice-aurora-mysql.rds.ca-west-1.amazonaws.com",
  "rds.ca-west-1.amazonaws.com"
```

```
]
```

Step 4: Create and configure users

You can create users with the Active Directory Users and Computers tool. This tool is part of the Active Directory Domain Services and Active Directory Lightweight Directory Services tools. Users represent individual people or entities that have access to your directory.

To create users in an Amazon Directory Service directory, you use an on-premises or Amazon EC2 instance based on Microsoft Windows that is joined to your Amazon Directory Service directory. You must be logged in to the instance as a user that has privileges to create users. For more information, see Manage users and groups in Amazon Managed Microsoft AD in the *Amazon Directory Service Administration Guide*.

Step 5: Create or modify an Aurora MySQL DB cluster

Create or modify an Aurora MySQL DB cluster for use with your directory. You can use the console, Amazon CLI, or RDS API to associate a DB cluster with a directory. You can do this task in one of the following ways:

- Create a new Aurora MySQL DB cluster using the console, the create-db-cluster CLI command, or the CreateDBCluster RDS API operation.

  For instructions, see Creating an Amazon Aurora DB cluster.
- Modify an existing Aurora MySQL DB cluster using the console, the modify-db-cluster CLI command, or the ModifyDBCluster RDS API operation.

  For instructions, see Modifying an Amazon Aurora DB cluster.
- Restore an Aurora MySQL DB cluster from a DB snapshot using the console, the restore-db-cluster-from-snapshot CLI command, or the RestoreDBClusterFromSnapshot RDS API operation.

  For instructions, see Restoring from a DB cluster snapshot.
- Restore an Aurora MySQL DB cluster to a point-in-time using the console, the restore-db-cluster-to-point-in-time CLI command, or the RestoreDBClusterToPointInTime RDS API operation.

  For instructions, see Restoring a DB cluster to a specified time.

Kerberos authentication is only supported for Aurora MySQL DB clusters in a VPC. The DB cluster can be in the same VPC as the directory, or in a different VPC. The DB cluster's VPC must have a VPC security group that allows outbound communication to your directory.

Console

When you use the console to create, modify, or restore a DB cluster, choose **Kerberos authentication** in the **Database authentication** section. Choose **Browse Directory** and then select the directory, or choose **Create a new directory**.
Kerberos authentication setting when creating a DB cluster.

Amazon CLI

When you use the Amazon CLI or RDS API, associate a DB cluster with a directory. The following parameters are required for the DB cluster to use the domain directory you created:

- For the `--domain` parameter, use the domain identifier ("d-*" identifier) generated when you created the directory.
- For the `--domain-iam-role-name` parameter, use the role you created that uses the managed IAM policy `AmazonRDSDirectoryServiceAccess`.

For example, the following CLI command modifies a DB cluster to use a directory.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbcluster \
    --domain d-ID \
    --domain-iam-role-name role-name
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --domain d-ID ^
    --domain-iam-role-name role-name
```

> **Important**
>
> If you modify a DB cluster to turn on Kerberos authentication, reboot the reader DB instances after making the change.

Step 6: Create Aurora MySQL users that use Kerberos authentication

The DB cluster is joined to the Amazon Managed Microsoft AD domain. Thus, you can create Aurora MySQL users from the Active Directory users in your domain. Database permissions are managed through standard Aurora MySQL permissions that are granted to and revoked from these users.

You can allow an Active Directory user to authenticate with Aurora MySQL. To do this, first use the Amazon RDS primary user credentials to connect to the Aurora MySQL DB cluster as with any other DB cluster. After you're logged in, create an externally authenticated user with Kerberos authentication in Aurora MySQL as shown here:

```
CREATE USER user_name@'host_name' IDENTIFIED WITH 'authentication_kerberos' BY
 'realm_name';
```

- Replace *user_name* with the username. Users (both humans and applications) from your domain can now connect to the DB cluster from a domain-joined client machine using Kerberos authentication.
- Replace *host_name* with the hostname. You can use `%` as a wild card. You can also use specific IP addresses for the hostname.
- Replace *realm_name* with the directory realm name of the domain. The realm name is usually the same as the DNS domain name in uppercase letters, such as `CORP.EXAMPLE.COM`. A realm is a group of systems that use the same Kerberos Key Distribution Center.

The following example creates a database user with the name `Admin` that authenticates against the Active Directory with the realm name `MYSQL.LOCAL`.

```
CREATE USER Admin@'%' IDENTIFIED WITH 'authentication_kerberos' BY 'MYSQL.LOCAL';
```

Modifying an existing Aurora MySQL login

You can also modify an existing Aurora MySQL login to use Kerberos authentication by using the following syntax:

```
ALTER USER user_name IDENTIFIED WITH 'authentication_kerberos' BY 'realm_name';
```

Step 7: Configure a MySQL client

To configure a MySQL client, take the following steps:

1. Create a `krb5.conf` file (or equivalent) to point to the domain.
2. Verify that traffic can flow between the client host and Amazon Directory Service. Use a network utility such as Netcat, for the following:
   - Verify traffic over DNS for port 53.
   - Verify traffic over TCP/UDP for port 53 and for Kerberos, which includes ports 88 and 464 for Amazon Directory Service.
3. Verify that traffic can flow between the client host and the DB instance over the database port. For example, use `mysql` to connect and access the database.

The following is sample `krb5.conf` content for Amazon Managed Microsoft AD.

```
[libdefaults]
 default_realm = EXAMPLE.COM
[realms]
 EXAMPLE.COM = {
  kdc = example.com
  admin_server = example.com
 }
[domain_realm]
 .example.com = EXAMPLE.COM
 example.com = EXAMPLE.COM
```

The following is sample `krb5.conf` content for an on-premises Microsoft Active Directory.

```
[libdefaults]
 default_realm = EXAMPLE.COM
[realms]
 EXAMPLE.COM = {
  kdc = example.com
  admin_server = example.com
 }
 ONPREM.COM = {
  kdc = onprem.com
```

```
  admin_server = onprem.com
 }
[domain_realm]
 .example.com = EXAMPLE.COM
 example.com = EXAMPLE.COM
 .onprem.com = ONPREM.COM
 onprem.com = ONPREM.COM
 .rds.amazonaws.com = EXAMPLE.COM
 .amazonaws.com.cn = EXAMPLE.COM
 .amazon.com = EXAMPLE.COM
```

Step 8: (Optional) Configure case-insensitive username comparison

By default, the character case of the MySQL database username must match that of the Active Directory login. However, you can now use case-insensitive username comparison with the `authentication_kerberos` plugin. To do so, you set the `authentication_kerberos_caseins_cmp` DB cluster parameter to `true`.

To use case-insensitive username comparison

1. Create a custom DB cluster parameter group. Follow the procedures in Creating a DB cluster parameter groupin Amazon Aurora.
2. Edit the new parameter group to set the value of `authentication_kerberos_caseins_cmp` to `true`. Follow the procedures in Modifying parameters in a DB cluster parameter groupin Amazon Aurora.
3. Associate the DB cluster parameter group with your Aurora MySQL DB cluster. Follow the procedures in Associating a DB cluster parameter group with a DB cluster in Amazon Aurora.
4. Reboot the DB cluster.

Connecting to Aurora MySQL with Kerberos authentication

To avoid errors, use a MySQL client with version 8.0.26 or higher on Unix platforms, 8.0.27 or higher on Windows.

Using the Aurora MySQL Kerberos login to connect to the DB cluster

To connect to Aurora MySQL with Kerberos authentication, you log in as a database user that you created using the instructions in Step 6: Create Aurora MySQL users that use Kerberos authentication.

At a command prompt, connect to one of the endpoints associated with your Aurora MySQL DB cluster. When you're prompted for the password, enter the Kerberos password associated with that username.

When you authenticate with Kerberos, a *ticket-granting ticket* (TGT) is generated if one doesn't already exist. The `authentication_kerberos` plugin uses the TGT to get a *service ticket*, which is then presented to the Aurora MySQL database server.

You can use the MySQL client to connect to Aurora MySQL with Kerberos authentication using either Windows or Unix.

Unix

You can connect by using either one of the following methods:

- Obtain the TGT manually. In this case, you don't need to supply the password to the MySQL client.
- Supply the password for the Active Directory login directly to the MySQL client.

The client-side plugin is supported on Unix platforms for MySQL client versions 8.0.26 and higher.

To connect by obtaining the TGT manually

1. At the command line interface, use the following command to obtain the TGT.

```
kinit user_name
```

2. Use the following `mysql` command to log in to the DB instance endpoint of your DB cluster.

```
mysql -h DB_instance_endpoint -P 3306 -u user_name -p
```

> **Note**
>
> Authentication can fail if the keytab is rotated on the DB instance. In this case, obtain a new TGT by rerunning `kinit`.

To connect directly

1. At the command line interface, use the following `mysql` command to log in to the DB instance endpoint of your DB cluster.

```
mysql -h DB_instance_endpoint -P 3306 -u user_name -p
```

2. Enter the password for the Active Directory user.

Windows

On Windows, authentication is usually done at login time, so you don't need to obtain the TGT manually to connect to the Aurora MySQL DB cluster. The case of the database username must match the character case of the user in the Active Directory. For example, if the user in the Active Directory appears as `Admin`, the database username must be `Admin`.

The client-side plugin is supported on Windows for MySQL client versions 8.0.27 and higher.

To connect directly

- At the command line interface, use the following `mysql` command to log in to the DB instance endpoint of your DB cluster.

```
mysql -h DB_instance_endpoint -P 3306 -u user_name
```

Kerberos authentication with Aurora global databases

Kerberos authentication for Aurora MySQL is supported for Aurora global databases. To authenticate users on the secondary DB cluster using the Active Directory of the primary DB cluster, replicate the Active Directory to the secondary Amazon Web Services Region. You turn on Kerberos authentication on the secondary cluster using the same domain ID as for the primary cluster. Amazon Managed Microsoft AD replication is supported only with the Enterprise version of Active Directory. For more information, see Multi-Region replication in the *Amazon Directory Service Administration Guide*.

Migrating from RDS for MySQL to Aurora MySQL

After you migrate from RDS for MySQL with Kerberos authentication enabled to Aurora MySQL, modify users created with the `auth_pam` plugin to use the `authentication_kerberos` plugin. For example:

```
ALTER USER user_name IDENTIFIED WITH 'authentication_kerberos' BY 'realm_name';
```

Preventing ticket caching

If a valid TGT doesn't exist when the MySQL client application starts, the application can obtain and cache the TGT. If you want to prevent the TGT from being cached, set a configuration parameter in the `/etc/krb5.conf` file.

> **Note**
>
> This configuration only applies to client hosts running Unix, not Windows.

To prevent TGT caching

- Add an `[appdefaults]` section to `/etc/krb5.conf` as follows:

```
[appdefaults]
  mysql = {
    destroy_tickets = true
  }
```

Logging for Kerberos authentication

The `AUTHENTICATION_KERBEROS_CLIENT_LOG` environment variable sets the logging level for Kerberos authentication. You can use the logs for client-side debugging.

The permitted values are 1–5. Log messages are written to the standard error output. The following table describes each logging level.

Logging level	Description
1 or not set	No logging

Logging level	Description
2	Error messages
3	Error and warning messages
4	Error, warning, and information messages
5	Error, warning, information, and debug messages

Managing a DB cluster in a domain

You can use the Amazon CLI or the RDS API to manage your DB cluster and its relationship with your managed Active Directory. For example, you can associate an Active Directory for Kerberos authentication and disassociate an Active Directory to turn off Kerberos authentication. You can also move a DB cluster to be externally authenticated by one Active Directory to another.

For example, using the Amazon RDS API, you can do the following:

- To reattempt turning on Kerberos authentication for a failed membership, use the `ModifyDBInstance` API operation and specify the current membership's directory ID.
- To update the IAM role name for membership, use the `ModifyDBInstance` API operation and specify the current membership's directory ID and the new IAM role.
- To turn off Kerberos authentication on a DB cluster, use the `ModifyDBInstance` API operation and specify `none` as the domain parameter.
- To move a DB cluster from one domain to another, use the `ModifyDBInstance` API operation and specify the domain identifier of the new domain as the domain parameter.
- To list membership for each DB cluster, use the `DescribeDBInstances` API operation.

Understanding domain membership

After you create or modify your DB cluster, it becomes a member of the domain. You can view the status of the domain membership for the DB cluster by running the describe-db-clusters CLI command. The status of the DB cluster can be one of the following:

- `kerberos-enabled` – The DB cluster has Kerberos authentication turned on.

- `enabling-kerberos` – Amazon is in the process of turning on Kerberos authentication on this DB cluster.
- `pending-enable-kerberos` – Turning on Kerberos authentication is pending on this DB cluster.
- `pending-maintenance-enable-kerberos` – Amazon will attempt to turn on Kerberos authentication on the DB cluster during the next scheduled maintenance window.
- `pending-disable-kerberos` – Turning off Kerberos authentication is pending on this DB cluster.
- `pending-maintenance-disable-kerberos` – Amazon will attempt to turn off Kerberos authentication on the DB cluster during the next scheduled maintenance window.
- `enable-kerberos-failed` – A configuration problem has prevented Amazon from turning on Kerberos authentication on the DB cluster. Check and fix your configuration before reissuing the DB cluster modify command.
- `disabling-kerberos` – Amazon is in the process of turning off Kerberos authentication on this DB cluster.

A request to turn on Kerberos authentication can fail because of a network connectivity issue or an incorrect IAM role. For example, suppose that you create a DB cluster or modify an existing DB cluster and the attempt to turn on Kerberos authentication fails. In this case, reissue the modify command or modify the newly created DB cluster to join the domain.

Migrating data to an Amazon Aurora MySQL DB cluster

You have several options for migrating data from your existing database to an Amazon Aurora MySQL DB cluster. Your migration options also depend on the database that you are migrating from and the size of the data that you are migrating.

There are two different types of migration: physical and logical. Physical migration means that physical copies of database files are used to migrate the database. Logical migration means that the migration is accomplished by applying logical database changes, such as inserts, updates, and deletes.

Physical migration has the following advantages:

- Physical migration is faster than logical migration, especially for large databases.
- Database performance does not suffer when a backup is taken for physical migration.
- Physical migration can migrate everything in the source database, including complex database components.

Physical migration has the following limitations:

- The `innodb_page_size` parameter must be set to its default value (16KB).
- The `innodb_data_file_path` parameter must be configured with only one data file that uses the default data file name `"ibdata1:12M:autoextend"`. Databases with two data files, or with a data file with a different name, can't be migrated using this method.

  The following are examples of file names that are not allowed: `"innodb_data_file_path=ibdata1:50M; ibdata2:50M:autoextend"` and `"innodb_data_file_path=ibdata01:50M:autoextend"`.
- The `innodb_log_files_in_group` parameter must be set to its default value (2).

Logical migration has the following advantages:

- You can migrate subsets of the database, such as specific tables or parts of a table.
- The data can be migrated regardless of the physical storage structure.

Logical migration has the following limitations:

- Logical migration is usually slower than physical migration.
- Complex database components can slow down the logical migration process. In some cases, complex database components can even block logical migration.

The following table describes your options and the type of migration for each option.

Migrating from	Migration type	Solution
An RDS for MySQL DB instance	Physical	You can migrate from an RDS for MySQL DB instance by first creating an Aurora MySQL read replica of a MySQL DB instance. When the replica lag between the MySQL DB instance and the Aurora MySQL read replica is 0, you can direct your client applicati ons to read from the Aurora read replica and then stop replication to make the Aurora MySQL read replica a standalone Aurora MySQL DB cluster for reading and writing. For details, see Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster by using an Aurora read replica.
An RDS for MySQL DB snapshot	Physical	You can migrate data directly from an RDS for MySQL DB snapshot to an Amazon Aurora MySQL DB cluster. For details, see Migrating an RDS for MySQL snapshot to Aurora.
A MySQL database external to Amazon RDS	Logical	You can create a dump of your data using the `mysqldump` utility, and then import that data into an existing Amazon Aurora MySQL DB cluster. For details, see Logical migration from MySQL to Amazon Aurora MySQL by using mysqldump. To export metadata for database users during the migration from an external MySQL database, you can also use

Migrating from	Migration type	Solution
		a MySQL Shell command instead of `mysqldump` . For more information, see Instance Dump Utility, Schema Dump Utility, and Table Dump Utility. **Note** The mysqlpump utility is deprecated as of MySQL 8.0.34.
A MySQL database external to Amazon RDS	Physical	You can copy the backup files from your database to an Amazon Simple Storage Service (Amazon S3) bucket, and then restore an Amazon Aurora MySQL DB cluster from those files. This option can be considerably faster than migrating data using `mysqldump` . For details, see Physical migration from MySQL by using Percona XtraBackup and Amazon S3.
A MySQL database external to Amazon RDS	Logical	You can save data from your database as text files and copy those files to an Amazon S3 bucket. You can then load that data into an existing Aurora MySQL DB cluster using the `LOAD DATA FROM S3` MySQL command. For more information, see Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket.

Migrating from	Migration type	Solution
A database that isn't MySQL-compatible	Logical	You can use Amazon Database Migration Service (Amazon DMS) to migrate data from a database that isn't MySQL-compatible. For more information on Amazon DMS, see What is Amazon database migration service?

Note

If you're migrating a MySQL database external to Amazon RDS, the migration options described in the table are supported only if your database supports the InnoDB or MyISAM tablespaces.

If the MySQL database you're migrating to Aurora MySQL uses `memcached`, remove `memcached` before migrating it.

You can't migrate to Aurora MySQL version 3.05 and higher from some older MySQL 8.0 versions, including 8.0.11, 8.0.13, and 8.0.15. We recommend that you upgrade to MySQL version 8.0.28 before migrating.

Migrating data from an external MySQL database to an Amazon Aurora MySQL DB cluster

If your database supports the InnoDB or MyISAM tablespaces, you have these options for migrating your data to an Amazon Aurora MySQL DB cluster:

- You can create a dump of your data using the `mysqldump` utility, and then import that data into an existing Amazon Aurora MySQL DB cluster. For more information, see Logical migration from MySQL to Amazon Aurora MySQL by using mysqldump.
- You can copy the full and incremental backup files from your database to an Amazon S3 bucket, and then restore to an Amazon Aurora MySQL DB cluster from those files. This option can be considerably faster than migrating data using `mysqldump`. For more information, see Physical migration from MySQL by using Percona XtraBackup and Amazon S3.

Topics

- Physical migration from MySQL by using Percona XtraBackup and Amazon S3
- Logical migration from MySQL to Amazon Aurora MySQL by using mysqldump

Physical migration from MySQL by using Percona XtraBackup and Amazon S3

You can copy the full and incremental backup files from your source MySQL version 5.7 or 8.0 database to an Amazon S3 bucket. Then you can restore to an Amazon Aurora MySQL DB cluster with the same major DB engine version from those files.

This option can be considerably faster than migrating data using `mysqldump`, because using `mysqldump` replays all of the commands to recreate the schema and data from your source database in your new Aurora MySQL DB cluster. By copying your source MySQL data files, Aurora MySQL can immediately use those files as the data for an Aurora MySQL DB cluster.

You can also minimize downtime by using binary log replication during the migration process. If you use binary log replication, the external MySQL database remains open to transactions while the data is being migrated to the Aurora MySQL DB cluster. After the Aurora MySQL DB cluster has been created, you use binary log replication to synchronize the Aurora MySQL DB cluster with the transactions that happened after the backup. When the Aurora MySQL DB cluster is caught up with the MySQL database, you finish the migration by completely switching to the Aurora MySQL DB cluster for new transactions. For more information, see Synchronizing the Amazon Aurora MySQL DB cluster with the MySQL database using replication.

Contents

- Limitations and considerations
- Before you begin
  - Installing Percona XtraBackup
  - Required permissions
  - Creating the IAM service role
- Backing up files to be restored as an Amazon Aurora MySQL DB cluster
  - Creating a full backup with Percona XtraBackup
  - Using incremental backups with Percona XtraBackup
  - Backup considerations
- Restoring an Amazon Aurora MySQL DB cluster from an Amazon S3 bucket
- Synchronizing the Amazon Aurora MySQL DB cluster with the MySQL database using replication
  - Configuring your external MySQL database and your Aurora MySQL DB cluster for encrypted replication
  - Synchronizing the Amazon Aurora MySQL DB cluster with the external MySQL database
- Reducing the time for physical migration to Amazon Aurora MySQL
  - Unsupported table types
  - User accounts with unsupported privileges
  - Dynamic privileges in Aurora MySQL version 3
  - Stored objects with 'rdsadmin'@'localhost' as the definer

Limitations and considerations

The following limitations and considerations apply to restoring to an Amazon Aurora MySQL DB cluster from an Amazon S3 bucket:

- You can migrate your data only to a new DB cluster, not an existing DB cluster.
- You must use Percona XtraBackup to back up your data to S3. For more information, see Installing Percona XtraBackup.
- The Amazon S3 bucket and the Aurora MySQL DB cluster must be in the same Amazon Region.
- You can't restore from the following:
  - A DB cluster snapshot export to Amazon S3. You also can't migrate data from a DB cluster snapshot export to your S3 bucket.

  - An encrypted source database, but you can encrypt the data being migrated. You can also leave the data unencrypted during the migration process.
  - A MySQL 5.5 or 5.6 database
- Percona Server for MySQL isn't supported as a source database, because it can contain `compression_dictionary*` tables in the `mysql` schema.
- You can't restore to an Aurora Serverless DB cluster.
- Backward migration isn't supported for either major versions or minor versions. For example, you can't migrate from MySQL version 8.0 to Aurora MySQL version 2 (compatible with MySQL 5.7), and you can't migrate from MySQL version 8.0.32 to Aurora MySQL version 3.03, which is compatible with MySQL community version 8.0.26.
- You can't migrate to Aurora MySQL version 3.05 and higher from some older MySQL 8.0 versions, including 8.0.11, 8.0.13, and 8.0.15. We recommend that you upgrade to MySQL version 8.0.28 before migrating.
- Importing from Amazon S3 isn't supported on the db.t2.micro DB instance class. However, you can restore to a different DB instance class, and change the DB instance class later. For more information about DB instance classes, see Amazon AuroraDB instance classes.
- Amazon S3 limits the size of a file uploaded to an S3 bucket to 5 TB. If a backup file exceeds 5 TB, then you must split the backup file into smaller files.
- Amazon RDS limits the number of files uploaded to an S3 bucket to 1 million. If the backup data for your database, including all full and incremental backups, exceeds 1 million files, use a Gzip (.gz), tar (.tar.gz), or Percona xbstream (.xbstream) file to store full and incremental backup files in the S3 bucket. Percona XtraBackup 8.0 only supports Percona xbstream for compression.
- To provide management services for each DB cluster, the `rdsadmin` user is created when the DB cluster is created. As this is a reserved user in RDS, the following limitations apply:
  - Functions, procedures, views, events, and triggers with the `'rdsadmin'@'localhost'` definer aren't imported. For more information, see Stored objects with 'rdsadmin'@'localhost' as the definer and Master user privileges with Amazon Aurora MySQL.
  - When the Aurora MySQL DB cluster is created, a master user is created with the maximum privileges supported. While restoring from backup, any unsupported privileges assigned to users being imported are removed automatically during import.

    To identify users that might be affected by this, see User accounts with unsupported privileges. For more information on supported privileges in Aurora MySQL, see Role-based privilege model.

- For Aurora MySQL version 3, dynamic privileges aren't imported. Aurora-supported dynamic privileges can be imported after migration. For more information, see Dynamic privileges in Aurora MySQL version 3.
- User-created tables in the `mysql` schema aren't migrated.
- The `innodb_data_file_path` parameter must be configured with only one data file that uses the default data file name `ibdata1:12M:autoextend`. Databases with two data files, or with a data file with a different name, can't be migrated using this method.

  The following are examples of file names that aren't allowed: `innodb_data_file_path=ibdata1:50M`, `ibdata2:50M:autoextend`, and `innodb_data_file_path=ibdata01:50M:autoextend`.
- You can't migrate from a source database that has tables defined outside of the default MySQL data directory.
- The maximum supported size for uncompressed backups using this method is currently limited to 64 TiB. For compressed backups, this limit goes lower to account for the uncompression space requirements. In such cases, the maximum supported backup size would be (`64 TiB – compressed backup size`).
- Aurora MySQL doesn't support the importing of MySQL and other external components and plugins.
- Aurora MySQL doesn't restore everything from your database. We recommend that you save the database schema and values for the following items from your source MySQL database, then add them to your restored Aurora MySQL DB cluster after it has been created:
  - User accounts
  - Functions
  - Stored procedures
  - Time zone information. Time zone information is loaded from the local operating system of your Aurora MySQL DB cluster. For more information, see Local time zone for Amazon Aurora DB clusters.

Before you begin

Before you can copy your data to an Amazon S3 bucket and restore to a DB cluster from those files, you must do the following:

- Install Percona XtraBackup on your local server.

- Permit Aurora MySQL to access your Amazon S3 bucket on your behalf.

Installing Percona XtraBackup

Amazon Aurora can restore a DB cluster from files that were created using Percona XtraBackup. You can install Percona XtraBackup from Software Downloads - Percona.

For MySQL 5.7 migration, use Percona XtraBackup 2.4.

For MySQL 8.0 migration, use Percona XtraBackup 8.0. Make sure that the Percona XtraBackup version is compatible with the engine version of your source database.

Required permissions

To migrate your MySQL data to an Amazon Aurora MySQL DB cluster, several permissions are required:

- The user that is requesting that Aurora create a new cluster from an Amazon S3 bucket must have permission to list the buckets for your Amazon account. You grant the user this permission using an Amazon Identity and Access Management (IAM) policy.
- Aurora requires permission to act on your behalf to access the Amazon S3 bucket where you store the files used to create your Amazon Aurora MySQL DB cluster. You grant Aurora the required permissions using an IAM service role.
- The user making the request must also have permission to list the IAM roles for your Amazon account.
- If the user making the request is to create the IAM service role or request that Aurora create the IAM service role (by using the console), then the user must have permission to create an IAM role for your Amazon account.
- If you plan to encrypt the data during the migration process, update the IAM policy of the user who will perform the migration to grant RDS access to the Amazon KMS keys used for encrypting the backups. For instructions, see Creating an IAM policy to access Amazon KMS resources.

For example, the following IAM policy grants a user the minimum required permissions to use the console to list IAM roles, create an IAM role, list the Amazon S3 buckets for your account, and list the KMS keys.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "iam:ListRoles",
                "iam:CreateRole",
                "iam:CreatePolicy",
                "iam:AttachRolePolicy",
                "s3:ListBucket",
                "kms:ListKeys"
            ],
            "Resource": "*"
        }
    ]
}
```

Additionally, for a user to associate an IAM role with an Amazon S3 bucket, the IAM user must have the `iam:PassRole` permission for that IAM role. This permission allows an administrator to restrict which IAM roles a user can associate with Amazon S3 buckets.

For example, the following IAM policy allows a user to associate the role named `S3Access` with an Amazon S3 bucket.

JSON

```
{
    "Version":"2012-10-17",
    "Statement":[
        {
            "Sid":"AllowS3AccessRole",
            "Effect":"Allow",
            "Action":"iam:PassRole",
            "Resource":"arn:aws-cn:iam::123456789012:role/S3Access"
        }
    ]
}
```

For more information on IAM user permissions, see Managing access using policies.

Creating the IAM service role

You can have the Amazon Web Services Management Console create a role for you by choosing the **Create a New Role** option (shown later in this topic). If you select this option and specify a name for the new role, then Aurora creates the IAM service role required for Aurora to access your Amazon S3 bucket with the name that you supply.

As an alternative, you can manually create the role using the following procedure.

To create an IAM role for Aurora to access Amazon S3

1. Complete the steps in Creating an IAM policy to access Amazon S3 resources.
2. Complete the steps in Creating an IAM role to allow Amazon Aurora to access Amazon services.
3. Complete the steps in Associating an IAM role with an Amazon Aurora MySQL DB cluster.

Backing up files to be restored as an Amazon Aurora MySQL DB cluster

You can create a full backup of your MySQL database files using Percona XtraBackup and upload the backup files to an Amazon S3 bucket. Alternatively, if you already use Percona XtraBackup to back up your MySQL database files, you can upload your existing full and incremental backup directories and files to an Amazon S3 bucket.

Topics

- Creating a full backup with Percona XtraBackup
- Using incremental backups with Percona XtraBackup
- Backup considerations

Creating a full backup with Percona XtraBackup

To create a full backup of your MySQL database files that can be restored from Amazon S3 to create an Aurora MySQL DB cluster, use the Percona XtraBackup utility (`xtrabackup`) to back up your database.

For example, the following command creates a backup of a MySQL database and stores the files in the `/on-premises/s3-restore/backup` folder.

```
xtrabackup --backup --user=<myuser> --password=<password> --target-dir=</on-premises/
s3-restore/backup>
```

If you want to compress your backup into a single file (which can be split, if needed), you can use the `--stream` option to save your backup in one of the following formats:

- Gzip (.gz)
- tar (.tar)
- Percona xbstream (.xbstream)

The following command creates a backup of your MySQL database split into multiple Gzip files.

```
xtrabackup --backup --user=<myuser> --password=<password> --stream=tar \
   --target-dir=</on-premises/s3-restore/backup> | gzip - | split -d --bytes=500MB \
   - </on-premises/s3-restore/backup/backup>.tar.gz
```

The following command creates a backup of your MySQL database split into multiple tar files.

```
xtrabackup --backup --user=<myuser> --password=<password> --stream=tar \
   --target-dir=</on-premises/s3-restore/backup> | split -d --bytes=500MB \
   - </on-premises/s3-restore/backup/backup>.tar
```

The following command creates a backup of your MySQL database split into multiple xbstream files.

```
xtrabackup --backup --user=<myuser> --password=<password> --stream=xbstream \
   --target-dir=</on-premises/s3-restore/backup> | split -d --bytes=500MB \
   - </on-premises/s3-restore/backup/backup>.xbstream
```

Note

If you see the following error, it might be caused by mixing file formats in your command:

```
ERROR:/bin/tar: This does not look like a tar archive
```

Once you have backed up your MySQL database using the Percona XtraBackup utility, you can copy your backup directories and files to an Amazon S3 bucket.

For information on creating and uploading a file to an Amazon S3 bucket, see Getting started with Amazon Simple Storage Service in the *Amazon S3 Getting Started Guide*.

Using incremental backups with Percona XtraBackup

Amazon Aurora MySQL supports both full and incremental backups created using Percona XtraBackup. If you already use Percona XtraBackup to perform full and incremental backups of your MySQL database files, you don't need to create a full backup and upload the backup files to Amazon S3. Instead, you can save a significant amount of time by copying your existing backup directories and files for your full and incremental backups to an Amazon S3 bucket. For more information, see Create an incremental backup on the Percona website.

When copying your existing full and incremental backup files to an Amazon S3 bucket, you must recursively copy the contents of the base directory. Those contents include the full backup and also all incremental backup directories and files. This copy must preserve the directory structure in the Amazon S3 bucket. Aurora iterates through all files and directories. Aurora uses the `xtrabackup-checkpoints` file included with each incremental backup to identify the base directory and to order incremental backups by log sequence number (LSN) range.

For information on creating and uploading a file to an Amazon S3 bucket, see Getting started with Amazon Simple Storage Service in the *Amazon S3 Getting Started Guide*.

Backup considerations

Aurora doesn't support partial backups created using Percona XtraBackup. You can't use the following options to create a partial backup when you back up the source files for your database: `--tables`, `--tables-exclude`, `--tables-file`, `--databases`, `--databases-exclude`, or `--databases-file`.

For more information about backing up your database with Percona XtraBackup, see Percona XtraBackup - Documentation and Work with binary logs on the Percona website.

Aurora supports incremental backups created using Percona XtraBackup. For more information, see Create an incremental backup on the Percona website.

Aurora consumes your backup files based on the file name. Be sure to name your backup files with the appropriate file extension based on the file format—for example, `.xbstream` for files stored using the Percona xbstream format.

Aurora consumes your backup files in alphabetical order and also in natural number order. Always use the `split` option when you issue the `xtrabackup` command to ensure that your backup files are written and named in the proper order.

Amazon S3 limits the size of a file uploaded to an Amazon S3 bucket to 5 TB. If the backup data for your database exceeds 5 TB, use the `split` command to split the backup files into multiple files that are each less than 5 TB.

Aurora limits the number of source files uploaded to an Amazon S3 bucket to 1 million files. In some cases, backup data for your database, including all full and incremental backups, can come to a large number of files. In these cases, use a tarball (.tar.gz) file to store full and incremental backup files in the Amazon S3 bucket.

When you upload a file to an Amazon S3 bucket, you can use server-side encryption to encrypt the data. You can then restore an Amazon Aurora MySQL DB cluster from those encrypted files. Amazon Aurora MySQL can restore a DB cluster with files encrypted using the following types of server-side encryption:

- Server-side encryption with Amazon S3–managed keys (SSE-S3) – Each object is encrypted with a unique key employing strong multifactor encryption.
- Server-side encryption with Amazon KMS–managed keys (SSE-KMS) – Similar to SSE-S3, but you have the option to create and manage encryption keys yourself, and also other differences.

For information about using server-side encryption when uploading files to an Amazon S3 bucket, see Protecting data using server-side encryption in the *Amazon S3 Developer Guide*.

Restoring an Amazon Aurora MySQL DB cluster from an Amazon S3 bucket


You can restore your backup files from your Amazon S3 bucket to create a new Amazon Aurora MySQL DB cluster by using the Amazon RDS console.

To restore an Amazon Aurora MySQL DB cluster from files on an Amazon S3 bucket

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the Amazon RDS console, choose the Amazon Region in which to create your DB cluster. Choose the same Amazon Region as the Amazon S3 bucket that contains your database backup.

3. In the navigation pane, choose **Databases**, and then choose **Restore from S3**.
4. Choose **Restore from S3**.

   The **Create database by restoring from S3** page appears.

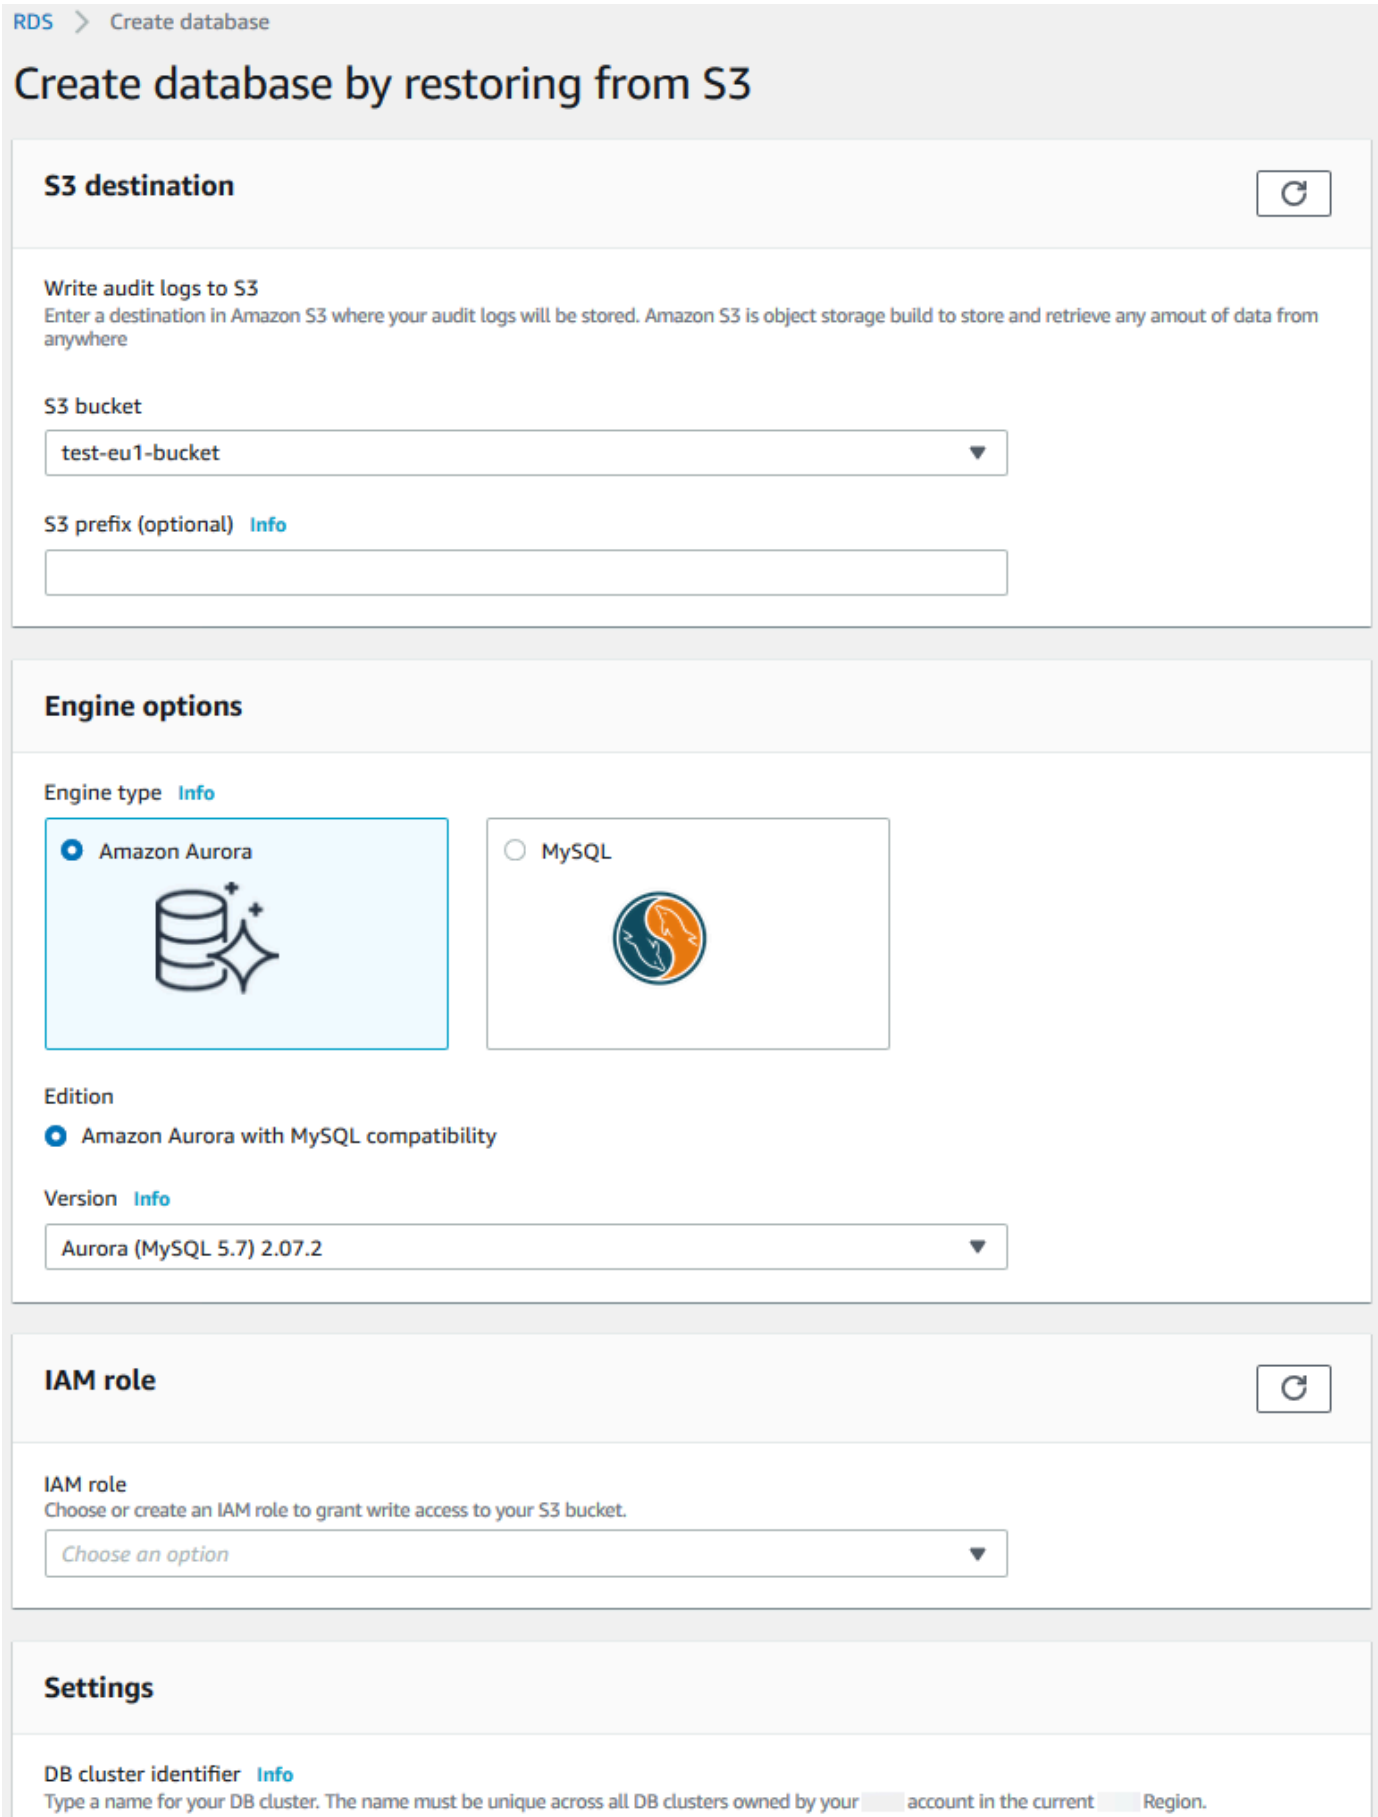
RDS > Create database
Create database by restoring from S3
S3 destination
Write audit logs to S3
Enter a destination in Amazon S3 where your audit logs will be stored. Amazon S3 is object storage build to store and retrieve any amout of data from anywhere
S3 bucket
test-eu1-bucket
S3 prefix (optional) Info
Engine options
Engine type Info
Amazon Aurora
MySQL
Edition
Amazon Aurora with MySQL compatibility
Version Info
Aurora (MySQL 5.7) 2.07.2
IAM role
IAM role
Choose or create an IAM role to grant write access to your S3 bucket.
Choose an option
Settings
DB cluster identifier Info
Type a name for your DB cluster. The name must be unique across all DB clusters owned by your account in the current Region.
database-1
The DB cluster identifier is case-insensitive, but is stored as all lowercase (as in "mydbcluster"). Constraints: 1 to 60 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

5. Under **S3 destination**:

    a. Choose the **S3 bucket** that contains the backup files.

    b. (Optional) For **S3 folder path prefix**, enter a file path prefix for the files stored in your Amazon S3 bucket.

    If you don't specify a prefix, then RDS creates your DB instance using all of the files and folders in the root folder of the S3 bucket. If you do specify a prefix, then RDS creates your DB instance using the files and folders in the S3 bucket where the path for the file begins with the specified prefix.

    For example, suppose that you store your backup files on S3 in a subfolder named backups, and you have multiple sets of backup files, each in its own directory (gzip_backup1, gzip_backup2, and so on). In this case, you specify a prefix of backups/gzip_backup1 to restore from the files in the gzip_backup1 folder.

6. Under **Engine options**:

    a. For **Engine type**, choose **Amazon Aurora**.

    b. For **Version**, choose the Aurora MySQL engine version for your restored DB instance.

7. For **IAM role**, you can choose an existing IAM role.

8. (Optional) You can also have a new IAM role created for you by choosing **Create a new role**. If so:

    a. Enter the **IAM role name**.

    b. Choose whether to **Allow access to KMS key**:

    - If you didn't encrypt the backup files, choose **No**.
    - If you encrypted the backup files with AES-256 (SSE-S3) when you uploaded them to Amazon S3, choose **No**. In this case, the data is decrypted automatically.
    - If you encrypted the backup files with Amazon KMS (SSE-KMS) server-side encryption when you uploaded them to Amazon S3, choose **Yes**. Next, choose the correct KMS key for **Amazon KMS key**.


      The Amazon Web Services Management Console creates an IAM policy that enables Aurora to decrypt the data.

For more information, see Protecting data using server-side encryption in the *Amazon S3 Developer Guide*.

9. Choose settings for your DB cluster, such as the DB cluster storage configuration, DB instance class, DB cluster identifier, and login credentials. For information about each setting, see Settings for Aurora DB clusters.
10. Customize additional settings for your Aurora MySQL DB cluster as needed.
11. Choose **Create database** to launch your Aurora DB instance.

On the Amazon RDS console, the new DB instance appears in the list of DB instances. The DB instance has a status of **creating** until the DB instance is created and ready for use. When the state changes to **available**, you can connect to the primary instance for your DB cluster. Depending on the DB instance class and store allocated, it can take several minutes for the new instance to be available.

To view the newly created cluster, choose the **Databases** view in the Amazon RDS console and choose the DB cluster. For more information, see Viewing an Amazon Aurora DB cluster.

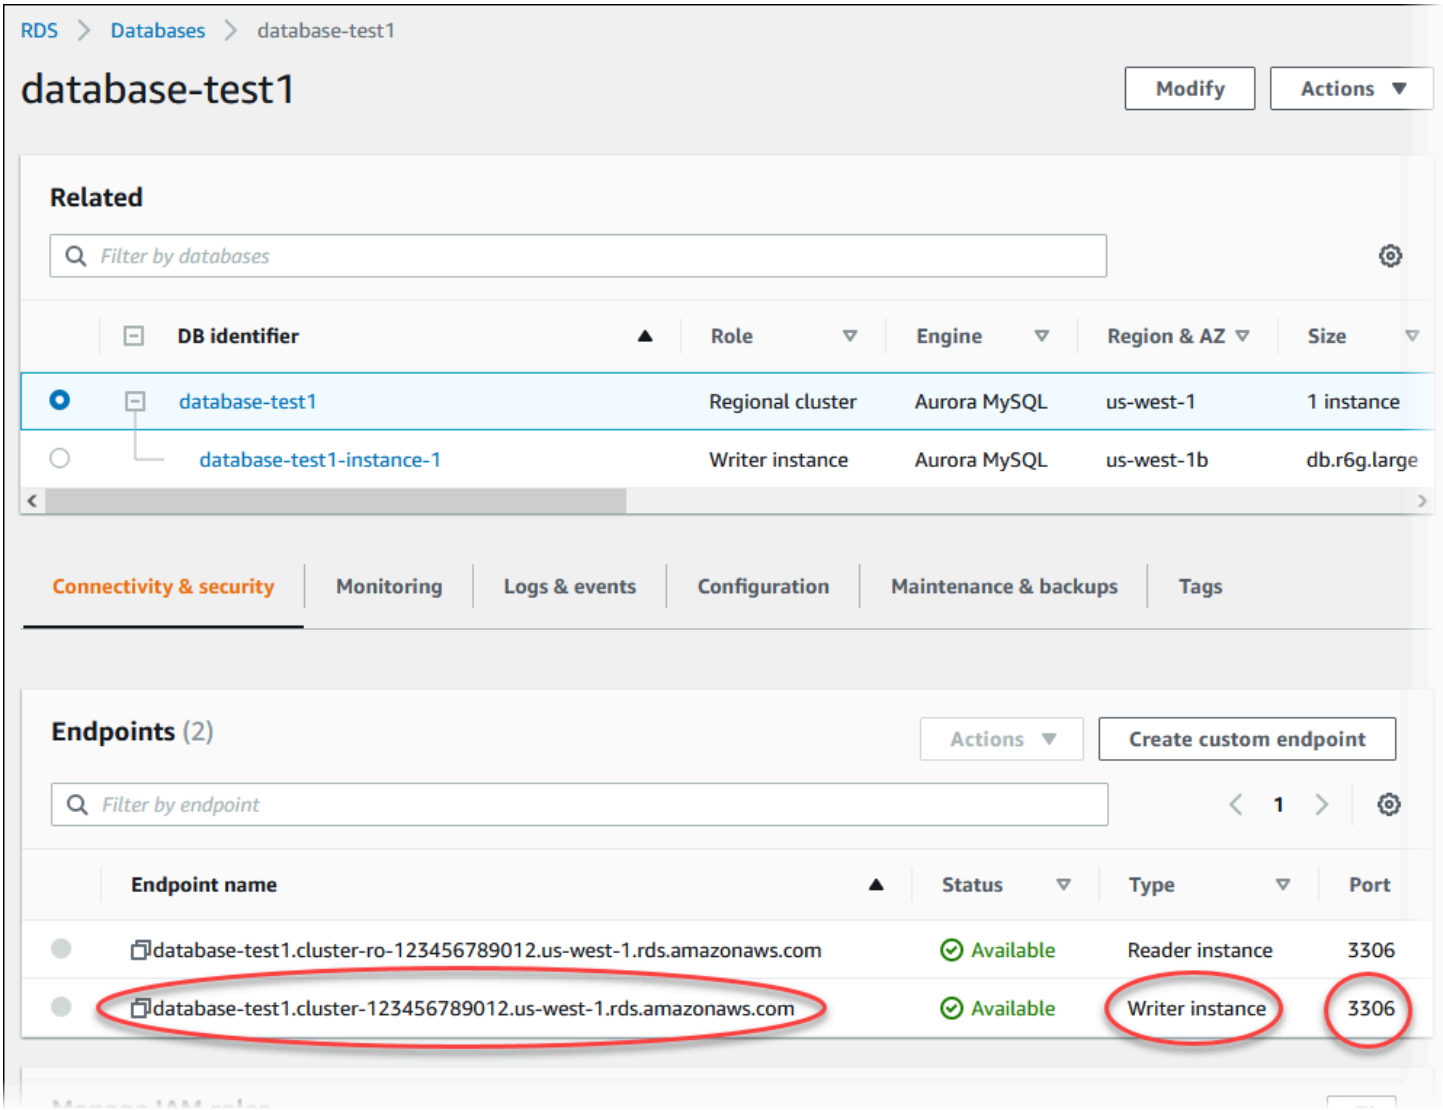

Note the port and the writer endpoint of the DB cluster. Use the writer endpoint and port of the DB cluster in your JDBC and ODBC connection strings for any application that performs write or read operations.

Synchronizing the Amazon Aurora MySQL DB cluster with the MySQL database using replication

To achieve little or no downtime during the migration, you can replicate transactions that were committed on your MySQL database to your Aurora MySQL DB cluster. Replication enables the DB cluster to catch up with the transactions on the MySQL database that happened during the migration. When the DB cluster is completely caught up, you can stop the replication and finish the migration to Aurora MySQL.

Topics

- Configuring your external MySQL database and your Aurora MySQL DB cluster for encrypted replication
- Synchronizing the Amazon Aurora MySQL DB cluster with the external MySQL database

Configuring your external MySQL database and your Aurora MySQL DB cluster for encrypted replication

To replicate data securely, you can use encrypted replication.

> **Note**
>
> If you don't need to use encrypted replication, you can skip these steps and move on to the instructions in Synchronizing the Amazon Aurora MySQL DB cluster with the external MySQL database.

The following are prerequisites for using encrypted replication:

- Secure Sockets Layer (SSL) must be enabled on the external MySQL primary database.
- A client key and client certificate must be prepared for the Aurora MySQL DB cluster.

During encrypted replication, the Aurora MySQL DB cluster acts a client to the MySQL database server. The certificates and keys for the Aurora MySQL client are in files in .pem format.

To configure your external MySQL database and your Aurora MySQL DB cluster for encrypted replication

1. Ensure that you are prepared for encrypted replication:
   - If you don't have SSL enabled on the external MySQL primary database and don't have a client key and client certificate prepared, enable SSL on the MySQL database server and generate the required client key and client certificate.
   - If SSL is enabled on the external primary, supply a client key and certificate for the Aurora MySQL DB cluster. If you don't have these, generate a new key and certificate for the Aurora MySQL DB cluster. To sign the client certificate, you must have the certificate authority key that you used to configure SSL on the external MySQL primary database.

For more information, see Creating SSL certificates and keys using openssl in the MySQL documentation.

You need the certificate authority certificate, the client key, and the client certificate.

2. Connect to the Aurora MySQL DB cluster as the primary user using SSL.

   For information about connecting to an Aurora MySQL DB cluster with SSL, see TLS connections to Aurora MySQL DB clusters.

3. Run the mysql.rds_import_binlog_ssl_material stored procedure to import the SSL information into the Aurora MySQL DB cluster.

   For the `ssl_material_value` parameter, insert the information from the .pem format files for the Aurora MySQL DB cluster in the correct JSON payload.

   The following example imports SSL information into an Aurora MySQL DB cluster. In .pem format files, the body code typically is longer than the body code shown in the example.

```
call mysql.rds_import_binlog_ssl_material(
'{"ssl_ca":"-----BEGIN CERTIFICATE-----
AAAAB3NzaC1yc2EAAAADAQABAAABAQClKsfkNkuSevGj3eYhCe53pcjqP3maAhDFcvBS7O6V
hz2ItxCih+PnDSUaw+WNQn/mZphTk/a/gU8jEzoOWbkM4yxyb/wB96xbiFveSFJuOp/d6RJhJOI0iBXr
lsLnBItntckiJ7FbtxJMXLvvwJryDUilBMTjYtwB+QhYXUMOzce5Pjz5/i8SeJtjnV3iAoG/cQk+0FzZ
qaeJAAHco+CY/5WrUBkrHmFJr6HcXkvJdWPkYQS3xqC0+FmUZofz221CBt5IMucxXPkX4rWi+z7wB3Rb
BQoQzd8v7yeb7OzlPnWOyN0qFU0XA246RA8QFYiCNYwI3f05p6KLxEXAMPLE
-----END CERTIFICATE-----\n","ssl_cert":"-----BEGIN CERTIFICATE-----
AAAAB3NzaC1yc2EAAAADAQABAAABAQClKsfkNkuSevGj3eYhCe53pcjqP3maAhDFcvBS7O6V
hz2ItxCih+PnDSUaw+WNQn/mZphTk/a/gU8jEzoOWbkM4yxyb/wB96xbiFveSFJuOp/d6RJhJOI0iBXr
lsLnBItntckiJ7FbtxJMXLvvwJryDUilBMTjYtwB+QhYXUMOzce5Pjz5/i8SeJtjnV3iAoG/cQk+0FzZ
qaeJAAHco+CY/5WrUBkrHmFJr6HcXkvJdWPkYQS3xqC0+FmUZofz221CBt5IMucxXPkX4rWi+z7wB3Rb
BQoQzd8v7yeb7OzlPnWOyN0qFU0XA246RA8QFYiCNYwI3f05p6KLxEXAMPLE
-----END CERTIFICATE-----\n","ssl_key":"-----BEGIN RSA PRIVATE KEY-----
AAAAB3NzaC1yc2EAAAADAQABAAABAQClKsfkNkuSevGj3eYhCe53pcjqP3maAhDFcvBS7O6V
hz2ItxCih+PnDSUaw+WNQn/mZphTk/a/gU8jEzoOWbkM4yxyb/wB96xbiFveSFJuOp/d6RJhJOI0iBXr
lsLnBItntckiJ7FbtxJMXLvvwJryDUilBMTjYtwB+QhYXUMOzce5Pjz5/i8SeJtjnV3iAoG/cQk+0FzZ
qaeJAAHco+CY/5WrUBkrHmFJr6HcXkvJdWPkYQS3xqC0+FmUZofz221CBt5IMucxXPkX4rWi+z7wB3Rb
BQoQzd8v7yeb7OzlPnWOyN0qFU0XA246RA8QFYiCNYwI3f05p6KLxEXAMPLE
-----END RSA PRIVATE KEY-----\n"}');
```

For more information, see mysql.rds_import_binlog_ssl_material and TLS connections to Aurora MySQL DB clusters.

> **Note**
>
> After running the procedure, the secrets are stored in files. To erase the files later, you can run the mysql.rds_remove_binlog_ssl_material stored procedure.

Synchronizing the Amazon Aurora MySQL DB cluster with the external MySQL database

You can synchronize your Amazon Aurora MySQL DB cluster with the MySQL database using replication.

To synchronize your Aurora MySQL DB cluster with the MySQL database using replication

1. Ensure that the /etc/my.cnf file for the external MySQL database has the relevant entries.

   If encrypted replication is not required, ensure that the external MySQL database is started with binary logs (binlogs) enabled and SSL disabled. The following are the relevant entries in the /etc/my.cnf file for unencrypted data.

   ```
   log-bin=mysql-bin
   server-id=2133421
   innodb_flush_log_at_trx_commit=1
   sync_binlog=1
   ```

   If encrypted replication is required, ensure that the external MySQL database is started with SSL and binlogs enabled. The entries in the /etc/my.cnf file include the .pem file locations for the MySQL database server.

   ```
   log-bin=mysql-bin
   server-id=2133421
   innodb_flush_log_at_trx_commit=1
   sync_binlog=1

   # Setup SSL.
   ssl-ca=/home/sslcerts/ca.pem
   ```

```
ssl-cert=/home/sslcerts/server-cert.pem
ssl-key=/home/sslcerts/server-key.pem
```

You can verify that SSL is enabled with the following command.

```
mysql> show variables like 'have_ssl';
```

Your output should be similar the following.

```
+~-~-~-~-~-~-~-~-~-~-~-~-~-~--+~-~-~-~-~-~--+
| Variable_name | Value |
+~-~-~-~-~-~-~-~-~-~-~-~-~-~--+~-~-~-~-~-~--+
| have_ssl      | YES   |
+~-~-~-~-~-~-~-~-~-~-~-~-~-~--+~-~-~-~-~-~--+
1 row in set (0.00 sec)
```


2. Determine the starting binary log position for replication. You specify the position to start replication in a later step.

   Using the Amazon Web Services Management Console

   a. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

   b. In the navigation pane, choose **Events**.

   c. In the **Events** list, note the position in the **Recovered from Binary log filename** event.

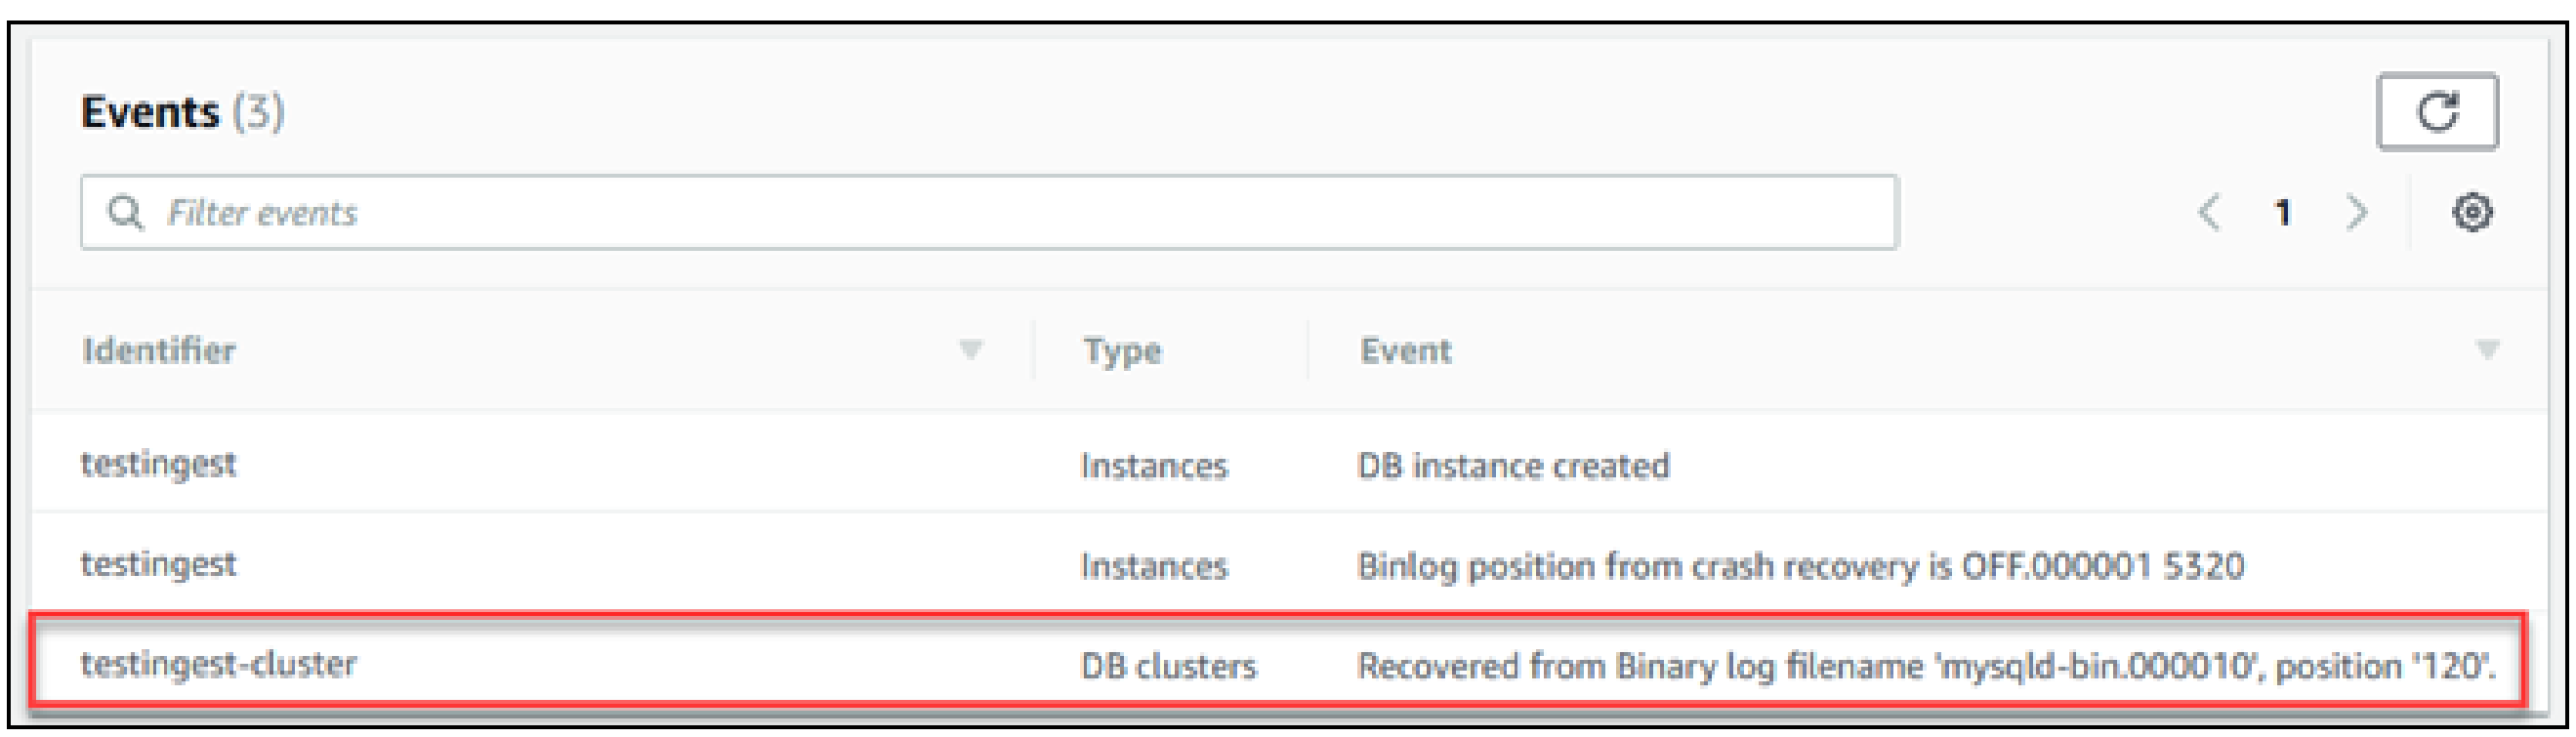

   Using the Amazon CLI

You can also get the binlog file name and position by using the describe-events Amazon CLI command. The following shows an example `describe-events` command.

```
PROMPT> aws rds describe-events
```

In the output, identify the event that shows the binlog position.

3. While connected to the external MySQL database, create a user to be used for replication. This account is used solely for replication and must be restricted to your domain to improve security. The following is an example.

```
mysql> CREATE USER '<user_name>'@'<domain_name>' IDENTIFIED BY '<password>';
```

The user requires the `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges. Grant these privileges to the user.

```
GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO
 '<user_name>'@'<domain_name>';
```

If you need to use encrypted replication, require SSL connections for the replication user. For example, you can use the following statement to require SSL connections on the user account *<user_name>*.

```
GRANT USAGE ON *.* TO '<user_name>'@'<domain_name>' REQUIRE SSL;
```

> **Note**
>
> If `REQUIRE SSL` is not included, the replication connection might silently fall back to an unencrypted connection.

4. In the Amazon RDS console, add the IP address of the server that hosts the external MySQL database to the VPC security group for the Aurora MySQL DB cluster. For more information on modifying a VPC security group, see Security groups for your VPC in the *Amazon Virtual Private Cloud User Guide*.

You might also need to configure your local network to permit connections from the IP address of your Aurora MySQL DB cluster, so that it can communicate with your external MySQL database. To find the IP address of the Aurora MySQL DB cluster, use the `host` command.

```
host <db_cluster_endpoint>
```

The host name is the DNS name from the Aurora MySQL DB cluster endpoint.

5. Enable binary log replication by running the mysql.rds_reset_external_master (Aurora MySQL version 2) or mysql.rds_reset_external_source (Aurora MySQL version 3) stored procedure. This stored procedure has the following syntax.

```
CALL mysql.rds_set_external_master (
  host_name
  , host_port
  , replication_user_name
  , replication_user_password
  , mysql_binary_log_file_name
  , mysql_binary_log_file_location
  , ssl_encryption
);

CALL mysql.rds_set_external_source (
  host_name
  , host_port
  , replication_user_name
  , replication_user_password
  , mysql_binary_log_file_name
  , mysql_binary_log_file_location
  , ssl_encryption
);
```

For information about the parameters, see mysql.rds_reset_external_master (Aurora MySQL version 2) and mysql.rds_reset_external_source (Aurora MySQL version 3).

For `mysql_binary_log_file_name` and `mysql_binary_log_file_location`, use the position in the **Recovered from Binary log filename** event you noted earlier.

If the data in the Aurora MySQL DB cluster is not encrypted, the `ssl_encryption` parameter must be set to `0`. If the data is encrypted, the `ssl_encryption` parameter must be set to `1`.

The following example runs the procedure for an Aurora MySQL DB cluster that has encrypted data.

```
CALL mysql.rds_set_external_master(
  'Externaldb.some.com',
  3306,
  'repl_user'@'mydomain.com',
  'password',
  'mysql-bin.000010',
  120,
  1);

CALL mysql.rds_set_external_source(
  'Externaldb.some.com',
  3306,
  'repl_user'@'mydomain.com',
  'password',
  'mysql-bin.000010',
  120,
  1);
```

This stored procedure sets the parameters that the Aurora MySQL DB cluster uses for connecting to the external MySQL database and reading its binary log. If the data is encrypted, it also downloads the SSL certificate authority certificate, client certificate, and client key to the local disk.

6. Start binary log replication by running the mysql.rds_start_replication stored procedure.

```
CALL mysql.rds_start_replication;
```

7. Monitor how far the Aurora MySQL DB cluster is behind the MySQL replication primary database. To do so, connect to the Aurora MySQL DB cluster and run the following command.

```
Aurora MySQL version 2:
SHOW SLAVE STATUS;
```

```
Aurora MySQL version 3:
SHOW REPLICA STATUS;
```

In the command output, the `Seconds Behind Master` field shows how far the Aurora MySQL DB cluster is behind the MySQL primary. When this value is `0` (zero), the Aurora MySQL DB cluster has caught up to the primary, and you can move on to the next step to stop replication.

8. Connect to the MySQL replication primary database and stop replication. To do so, run the mysql.rds_stop_replication stored procedure.

```
CALL mysql.rds_stop_replication;
```

Reducing the time for physical migration to Amazon Aurora MySQL

You can make the following database modifications to speed up the process of migrating a database to Amazon Aurora MySQL.

> **Important**
>
> Make sure to perform these updates on a copy of a production database, rather than on a production database. You can then back up the copy and restore it to your Aurora MySQL DB cluster to avoid any service interruptions on your production database.

Unsupported table types

Aurora MySQL supports only the InnoDB engine for database tables. If you have MyISAM tables in your database, then those tables must be converted before migrating to Aurora MySQL. The conversion process requires additional space for the MyISAM to InnoDB conversion during the migration procedure.

To reduce your chances of running out of space or to speed up the migration process, convert all of your MyISAM tables to InnoDB tables before migrating them. The size of the resulting InnoDB table is equivalent to the size required by Aurora MySQL for that table. To convert a MyISAM table to InnoDB, run the following command:

```
ALTER TABLE schema.table_name engine=innodb, algorithm=copy;
```

Aurora MySQL doesn't support compressed tables or pages, that is, tables created with `ROW_FORMAT=COMPRESSED` or `COMPRESSION = {"zlib"|"lz4"}`.

To reduce your chances of running out of space or to speed up the migration process, expand your compressed tables by setting `ROW_FORMAT` to `DEFAULT`, `COMPACT`, `DYNAMIC`, or `REDUNDANT`. For compressed pages, set `COMPRESSION="none"`.

For more information, see InnoDB row formats and InnoDB table and page compressionin the MySQL documentation.

You can use the following SQL script on your existing MySQL DB instance to list the tables in your database that are MyISAM tables, compressed tables, or tables with compressed pages.

```
-- This script examines a MySQL database for conditions that block
-- migrating the database into Aurora MySQL.
-- It must be run from an account that has read permission for the
-- INFORMATION_SCHEMA database.

-- Verify that this is a supported version of MySQL.

select msg as `==> Checking current version of MySQL.`
from
  (
  select
    'This script should be run on MySQL version 5.6 or higher. ' +
    'Earlier versions are not supported.' as msg,
    cast(substring_index(version(), '.', 1) as unsigned) * 100 +
      cast(substring_index(substring_index(version(), '.', 2), '.', -1)
      as unsigned)
    as major_minor
  ) as T
where major_minor <> 506;


-- List MyISAM and compressed tables. Include the table size.

select concat(TABLE_SCHEMA, '.', TABLE_NAME) as `==> MyISAM or Compressed Tables`,
round(((data_length + index_length) / 1024 / 1024), 2) "Approx size (MB)"
from INFORMATION_SCHEMA.TABLES
where
```

```
  ENGINE <> 'InnoDB'
  and
  (
    -- User tables
    TABLE_SCHEMA not in ('mysql', 'performance_schema',
                         'information_schema')
    or
    -- Non-standard system tables
    (
      TABLE_SCHEMA = 'mysql' and TABLE_NAME not in
        (
          'columns_priv', 'db', 'event', 'func', 'general_log',
          'help_category', 'help_keyword', 'help_relation',
          'help_topic', 'host', 'ndb_binlog_index', 'plugin',
          'proc', 'procs_priv', 'proxies_priv', 'servers', 'slow_log',
          'tables_priv', 'time_zone', 'time_zone_leap_second',
          'time_zone_name', 'time_zone_transition',
          'time_zone_transition_type', 'user'
        )
    )
  )
  or
  (
    -- Compressed tables
       ROW_FORMAT = 'Compressed'
  )
  or
  (
    -- Tables with compressed pages
       LOWER(CREATE_OPTIONS) like '%compression="zlib"%'
       or LOWER(CREATE_OPTIONS) like '%compression="lz4"%'
  );
```

User accounts with unsupported privileges

User accounts with privileges that aren't supported by Aurora MySQL are imported without the unsupported privileges. For the list of supported privileges, see Role-based privilege model.

You can run the following SQL query on your source database to list the user accounts that have unsupported privileges.

```
SELECT
    user,
```

```
    host
FROM
    mysql.user
WHERE
    Shutdown_priv = 'y'
    OR File_priv = 'y'
    OR Super_priv = 'y'
    OR Create_tablespace_priv = 'y';
```

Dynamic privileges in Aurora MySQL version 3

Dynamic privileges aren't imported. Aurora MySQL version 3 supports the following dynamic privileges.

```
'APPLICATION_PASSWORD_ADMIN',
'CONNECTION_ADMIN',
'REPLICATION_APPLIER',
'ROLE_ADMIN',
'SESSION_VARIABLES_ADMIN',
'SET_USER_ID',
'XA_RECOVER_ADMIN'
```

The following example script grants the supported dynamic privileges to the user accounts in the Aurora MySQL DB cluster.

```
-- This script finds the user accounts that have Aurora MySQL supported dynamic
 privileges
-- and grants them to corresponding user accounts in the Aurora MySQL DB cluster.

/home/ec2-user/opt/mysql/8.0.26/bin/mysql -uusername -pxxxxx -P8026 -h127.0.0.1 -BNe
 "SELECT
  CONCAT('GRANT ', GRANTS, ' ON *.* TO ', GRANTEE ,';') AS grant_statement
  FROM (select GRANTEE, group_concat(privilege_type) AS GRANTS FROM
 information_schema.user_privileges
      WHERE privilege_type IN (
        'APPLICATION_PASSWORD_ADMIN',
        'CONNECTION_ADMIN',
        'REPLICATION_APPLIER',
        'ROLE_ADMIN',
        'SESSION_VARIABLES_ADMIN',
        'SET_USER_ID',
        'XA_RECOVER_ADMIN')
```

```
      AND GRANTEE NOT IN (\"'mysql.session'@'localhost'\",
\"'mysql.infoschema'@'localhost'\",\"'mysql.sys'@'localhost'\") GROUP BY GRANTEE)
      AS PRIVGRANTS; " | /home/ec2-user/opt/mysql/8.0.26/bin/mysql -u master_username -
p master_password -h DB_cluster_endpoint
```

Stored objects with 'rdsadmin'@'localhost' as the definer

Functions, procedures, views, events, and triggers with `'rdsadmin'@'localhost'` as the definer aren't imported.

You can use the following SQL script on your source MySQL database to list the stored objects that have the unsupported definer.

```
-- This SQL query lists routines with `rdsadmin`@`localhost` as the definer.

SELECT
    ROUTINE_SCHEMA,
    ROUTINE_NAME
FROM
    information_schema.routines
WHERE
    definer = 'rdsadmin@localhost';

-- This SQL query lists triggers with `rdsadmin`@`localhost` as the definer.

SELECT
    TRIGGER_SCHEMA,
    TRIGGER_NAME,
    DEFINER
FROM
    information_schema.triggers
WHERE
    DEFINER = 'rdsadmin@localhost';

-- This SQL query lists events with `rdsadmin`@`localhost` as the definer.

SELECT
    EVENT_SCHEMA,
    EVENT_NAME
FROM
    information_schema.events
WHERE
    DEFINER = 'rdsadmin@localhost';
```

```
-- This SQL query lists views with `rdsadmin`@`localhost` as the definer.
SELECT
    TABLE_SCHEMA,
    TABLE_NAME
FROM
    information_schema.views
WHERE
    DEFINER = 'rdsadmin@localhost';
```

Logical migration from MySQL to Amazon Aurora MySQL by using mysqldump

Because Amazon Aurora MySQL is a MySQL-compatible database, you can use the `mysqldump` utility to copy data from your MySQL database or the `mariadb-dump` utility to copy your data from your MariaDB database to an existing Aurora MySQL DB cluster.

For a discussion of how to do so with MySQL or MariaDB databases that are very large, see the following topics in the *Amazon Relational Database Service User Guide*:

- MySQL – Importing data to an Amazon RDS for MySQL database with reduced downtime
- MariaDB – Importing data to an Amazon RDS for MariaDB database with reduced downtime

For MySQL or MariaDB databases that have smaller amounts of data, see the following topics in the *Amazon Relational Database Service User Guide*:

- MySQL – Importing data from an external MySQL database to an Amazon RDS for MySQL DB instance
- MariaDB – Importing data from an external MariaDB database to an Amazon RDS for MariaDB DB instance

Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster

You can migrate (copy) data to an Amazon Aurora MySQL DB cluster from an RDS for MySQL DB instance.

Topics

- Migrating an RDS for MySQL snapshot to Aurora
- Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster by using an Aurora read replica

> **Note**
>
> Because Amazon Aurora MySQL is compatible with MySQL, you can migrate data from your MySQL database by setting up replication between your MySQL database and an Amazon Aurora MySQL DB cluster. For more information, see Replication with Amazon Aurora.

Migrating an RDS for MySQL snapshot to Aurora

You can migrate a DB snapshot of an RDS for MySQL DB instance to create an Aurora MySQL DB cluster. The new Aurora MySQL DB cluster is populated with the data from the original RDS for MySQL DB instance. The DB snapshot must have been made from an Amazon RDS DB instance running a MySQL version that's compatible with Aurora MySQL.

You can migrate either a manual or automated DB snapshot. After the DB cluster is created, you can then create optional Aurora Replicas.

> **Note**
>
> You can also migrate an RDS for MySQL DB instance to an Aurora MySQL DB cluster by creating an Aurora read replica of your source RDS for MySQL DB instance. For more information, see Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster by using an Aurora read replica.
> You can't migrate to Aurora MySQL version 3.05 and higher from some older MySQL 8.0 versions, including 8.0.11, 8.0.13, and 8.0.15. We recommend that you upgrade to MySQL version 8.0.28 before migrating.

The general steps you must take are as follows:

1. Determine the amount of space to provision for your Aurora MySQL DB cluster. For more information, see How much space do I need?
2. Use the console to create the snapshot in the Amazon Region where the Amazon RDS MySQL instance is located. For information about creating a DB snapshot, see Creating a DB snapshot.
3. If the DB snapshot is not in the same Amazon Region as your DB cluster, use the Amazon RDS console to copy the DB snapshot to that Amazon Region. For information about copying a DB snapshot, see Copying a DB snapshot.
4. Use the console to migrate the DB snapshot and create an Aurora MySQL DB cluster with the same databases as the original MySQL DB instance.

> **Warning**
>
> Amazon RDS limits each Amazon account to one snapshot copy into each Amazon Region at a time.

How much space do I need?

When you migrate a snapshot of a MySQL DB instance into an Aurora MySQL DB cluster, Aurora uses an Amazon Elastic Block Store (Amazon EBS) volume to format the data from the snapshot before migrating it. In some cases, additional space is needed to format the data for migration.

Tables that are not MyISAM tables and are not compressed can be up to 16 TB in size. If you have MyISAM tables, then Aurora must use additional space in the volume to convert the tables to be compatible with Aurora MySQL. If you have compressed tables, then Aurora must use additional space in the volume to expand these tables before storing them on the Aurora cluster volume. Because of this additional space requirement, you should ensure that none of the MyISAM and compressed tables being migrated from your MySQL DB instance exceeds 8 TB in size.

Reducing the amount of space required to migrate data into Amazon Aurora MySQL

You might want to modify your database schema prior to migrating it into Amazon Aurora. Such modification can be helpful in the following cases:

- You want to speed up the migration process.
- You are unsure of how much space you need to provision.

- You have attempted to migrate your data and the migration has failed due to a lack of provisioned space.

You can make the following changes to improve the process of migrating a database into Amazon Aurora.

> **Important**
>
> Be sure to perform these updates on a new DB instance restored from a snapshot of a production database, rather than on a production instance. You can then migrate the data from the snapshot of your new DB instance into your Aurora DB cluster to avoid any service interruptions on your production database.

Table type	Limitation or guideline
MyISAM tables	Aurora MySQL supports InnoDB tables only. If you have MyISAM tables in your database, then those tables must be converted before being migrated into Aurora MySQL. The conversion process requires additional space for the MyISAM to InnoDB conversion during the migration procedure. To reduce your chances of running out of space or to speed up the migration process, convert all of your MyISAM tables to InnoDB tables before migrating them. The size of the resulting InnoDB table is equivalent to the size required by Aurora MySQL for that table. To convert a MyISAM table to InnoDB, run the following command: `alter table <schema>.<table_name> engine=innodb, algorithm=copy;`
Compressed tables	Aurora MySQL doesn't support compressed tables (that is, tables created with `ROW_FORMAT=COMPRESSED`). To reduce your chances of running out of space or to speed up the migration process, expand your compressed tables by setting `ROW_FORMAT` to `DEFAULT`, `COMPACT`, `DYNAMIC`, or `REDUNDANT`

Table type	Limitation or guideline
	. For more information, see InnoDB row formats in the MySQL documentation.

You can use the following SQL script on your existing MySQL DB instance to list the tables in your database that are MyISAM tables or compressed tables.

```
-- This script examines a MySQL database for conditions that block
-- migrating the database into Amazon Aurora.
-- It needs to be run from an account that has read permission for the
-- INFORMATION_SCHEMA database.

-- Verify that this is a supported version of MySQL.

select msg as `==> Checking current version of MySQL.`
from
  (
  select
    'This script should be run on MySQL version 5.6 or higher. ' +
    'Earlier versions are not supported.' as msg,
    cast(substring_index(version(), '.', 1) as unsigned) * 100 +
      cast(substring_index(substring_index(version(), '.', 2), '.', -1)
      as unsigned)
    as major_minor
  ) as T
where major_minor <> 506;


-- List MyISAM and compressed tables. Include the table size.

select concat(TABLE_SCHEMA, '.', TABLE_NAME) as `==> MyISAM or Compressed Tables`,
round(((data_length + index_length) / 1024 / 1024), 2) "Approx size (MB)"
from INFORMATION_SCHEMA.TABLES
where
  ENGINE <> 'InnoDB'
  and
  (
    -- User tables
    TABLE_SCHEMA not in ('mysql', 'performance_schema',
                         'information_schema')
    or
```

```
    -- Non-standard system tables
    (
      TABLE_SCHEMA = 'mysql' and TABLE_NAME not in
        (
          'columns_priv', 'db', 'event', 'func', 'general_log',
          'help_category', 'help_keyword', 'help_relation',
          'help_topic', 'host', 'ndb_binlog_index', 'plugin',
          'proc', 'procs_priv', 'proxies_priv', 'servers', 'slow_log',
          'tables_priv', 'time_zone', 'time_zone_leap_second',
          'time_zone_name', 'time_zone_transition',
          'time_zone_transition_type', 'user'
        )
    )
  )
  or
  (
    -- Compressed tables
       ROW_FORMAT = 'Compressed'
  );
```

The script produces output similar to the output in the following example. The example shows two tables that must be converted from MyISAM to InnoDB. The output also includes the approximate size of each table in megabytes (MB).

```
+---------------------------------+------------------+
| ==> MyISAM or Compressed Tables | Approx size (MB) |
+---------------------------------+------------------+
| test.name_table                 |          2102.25 |
| test.my_table                   |            65.25 |
+---------------------------------+------------------+
2 rows in set (0.01 sec)
```

Migrating an RDS for MySQL DB snapshot to an Aurora MySQL DB cluster

You can migrate a DB snapshot of an RDS for MySQL DB instance to create an Aurora MySQL DB cluster using the Amazon Web Services Management Console or the Amazon CLI. The new Aurora MySQL DB cluster is populated with the data from the original RDS for MySQL DB instance. For information about creating a DB snapshot, see Creating a DB snapshot.

If the DB snapshot is not in the Amazon Region where you want to locate your data, copy the DB snapshot to that Amazon Region. For information about copying a DB snapshot, see Copying a DB snapshot.

Console

When you migrate the DB snapshot by using the Amazon Web Services Management Console, the console takes the actions necessary to create only the DB cluster.

You can also choose for your new Aurora MySQL DB cluster to be encrypted at rest using an Amazon KMS key.

To migrate a MySQL DB snapshot by using the Amazon Web Services Management Console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Either start the migration from the MySQL DB instance or from the snapshot:

   To start the migration from the DB instance:

   1. In the navigation pane, choose **Databases**, and then select the MySQL DB instance.
   2. For **Actions**, choose **Migrate latest snapshot**.

   To start the migration from the snapshot:

   1. Choose **Snapshots**.
   2. On the **Snapshots** page, choose the snapshot that you want to migrate into an Aurora MySQL DB cluster.
   3. Choose **Snapshot Actions**, and then choose **Migrate Snapshot**.

   The **Migrate Database** page appears.
3. Set the following values on the **Migrate Database** page:

   - **Migrate to DB Engine**: Select `aurora`.
   - **DB Engine Version**: Select the DB engine version for the Aurora MySQL DB cluster.
   - **DB Instance Class**: Select a DB instance class that has the required storage and capacity for your database, for example `db.r3.large`. Aurora cluster volumes automatically grow as the amount of data in your database increases. An Aurora cluster volume can grow to 256 tebibytes (TiB), depending on the engine version. For the maximum size for each engine version, see Amazon Aurora size limits. Because storage grows automatically, choose a DB

instance class that meets your current storage requirements. For more information, see Overview of Amazon Aurora storage.

- **DB Instance Identifier**: Type a name for the DB cluster that is unique for your account in the Amazon Region you selected. This identifier is used in the endpoint addresses for the instances in your DB cluster. You might choose to add some intelligence to the name, such as including the Amazon Region and DB engine you selected, for example **`aurora-cluster1`**.

  The DB instance identifier has the following constraints:

  - It must contain from 1 to 63 alphanumeric characters or hyphens.
  - Its first character must be a letter.
  - It cannot end with a hyphen or contain two consecutive hyphens.
  - It must be unique for all DB instances per Amazon account, per Amazon Region.
- **Virtual Private Cloud (VPC)**: If you have an existing VPC, then you can use that VPC with your Aurora MySQL DB cluster by selecting your VPC identifier, for example `vpc-a464d1c1`. For information on creating a VPC, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only).

  Otherwise, you can choose to have Aurora create a VPC for you by selecting **Create a new VPC**.
- **DB subnet group**: If you have an existing subnet group, then you can use that subnet group with your Aurora MySQL DB cluster by selecting your subnet group identifier, for example `gs-subnet-group1`.

  Otherwise, you can choose to have Aurora create a subnet group for you by selecting **Create a new subnet group**.
- **Public accessibility**: Select **No** to specify that instances in your DB cluster can only be accessed by resources inside of your VPC. Select **Yes** to specify that instances in your DB cluster can be accessed by resources on the public network. The default is **Yes**.

  > **Note**
  >
  > Your production DB cluster might not need to be in a public subnet, because only your application servers require access to your DB cluster. If your DB cluster doesn't need to be in a public subnet, set **Publicly Accessible** to **No**.

- **Availability Zone**: Select the Availability Zone to host the primary instance for your Aurora MySQL DB cluster. To have Aurora select an Availability Zone for you, select **No Preference**.
- **Database Port**: Type the default port to be used when connecting to instances in the Aurora MySQL DB cluster. The default is `3306`.

  > **Note**
  >
  > You might be behind a corporate firewall that doesn't allow access to default ports such as the MySQL default port, 3306. In this case, provide a port value that your corporate firewall allows. Remember that port value later when you connect to the Aurora MySQL DB cluster.

- **Encryption**: Choose **Enable Encryption** for your new Aurora MySQL DB cluster to be encrypted at rest. If you choose **Enable Encryption**, you must choose a KMS key as the **Amazon KMS key** value.

  If your DB snapshot isn't encrypted, specify an encryption key to have your DB cluster encrypted at rest.

  If your DB snapshot is encrypted, specify an encryption key to have your DB cluster encrypted at rest using the specified encryption key. You can specify the encryption key used by the DB snapshot or a different key. You can't create an unencrypted DB cluster from an encrypted DB snapshot.

- **Auto Minor Version Upgrade**: This setting doesn't apply to Aurora MySQL DB clusters.

  For more information about engine updates for Aurora MySQL, see Database engine updates for Amazon Aurora MySQL.

4. Choose **Migrate** to migrate your DB snapshot.
5. Choose **Instances**, and then choose the arrow icon to show the DB cluster details and monitor the progress of the migration. On the details page, you can find the cluster endpoint used to connect to the primary instance of the DB cluster. For more information on connecting to an Aurora MySQL DB cluster, see Connecting to an Amazon Aurora DB cluster.

Amazon CLI

You can create an Aurora DB cluster from a DB snapshot of an RDS for MySQL DB instance by using the `restore-db-cluster-from-snapshot` command with the following parameters:

- `--db-cluster-identifier` – The name of the DB cluster to create.
- `--engine aurora-mysql` – For a MySQL 5.7–compatible or 8.0–compatible DB cluster.
- `--kms-key-id` – The Amazon KMS key to optionally encrypt the DB cluster with, depending on whether your DB snapshot is encrypted.
  - If your DB snapshot isn't encrypted, specify an encryption key to have your DB cluster encrypted at rest. Otherwise, your DB cluster isn't encrypted.
  - If your DB snapshot is encrypted, specify an encryption key to have your DB cluster encrypted at rest using the specified encryption key. Otherwise, your DB cluster is encrypted at rest using the encryption key for the DB snapshot.

    Note

    You can't create an unencrypted DB cluster from an encrypted DB snapshot.
- `--snapshot-identifier` – The Amazon Resource Name (ARN) of the DB snapshot to migrate. For more information about Amazon RDS ARNs, see Amazon Relational Database Service (Amazon RDS).

When you migrate the DB snapshot by using the `RestoreDBClusterFromSnapshot` command, the command creates both the DB cluster and the primary instance.

In this example, you create a MySQL 5.7–compatible DB cluster named *`mydbcluster`* from a DB snapshot with an ARN set to *`mydbsnapshotARN`*.

For Linux, macOS, or Unix:

```
aws rds restore-db-cluster-from-snapshot \
    --db-cluster-identifier mydbcluster \
    --snapshot-identifier mydbsnapshotARN \
    --engine aurora-mysql
```

For Windows:

```
aws rds restore-db-cluster-from-snapshot ^
    --db-cluster-identifier mydbcluster ^
    --snapshot-identifier mydbsnapshotARN ^
    --engine aurora-mysql
```

In this example, you create a MySQL 5.7–compatible DB cluster named *mydbcluster* from a DB snapshot with an ARN set to *mydbsnapshotARN*.

For Linux, macOS, or Unix:

```
aws rds restore-db-cluster-from-snapshot \
    --db-cluster-identifier mydbcluster \
    --snapshot-identifier mydbsnapshotARN \
    --engine aurora-mysql
```

For Windows:

```
aws rds restore-db-cluster-from-snapshot ^
    --db-cluster-identifier mydbcluster ^
    --snapshot-identifier mydbsnapshotARN ^
    --engine aurora-mysql
```

Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster by using an Aurora read replica

Aurora uses the MySQL DB engines' binary log replication functionality to create a special type of DB cluster called an Aurora read replica for a source RDS for MySQL DB instance. Updates made to the source RDS for MySQL DB instance are asynchronously replicated to the Aurora read replica.

We recommend using this functionality to migrate from a RDS for MySQL DB instance to an Aurora MySQL DB cluster by creating an Aurora read replica of your source RDS for MySQL DB instance. When the replica lag between the RDS for MySQL DB instance and the Aurora read replica is 0, you can direct your client applications to the Aurora read replica and then stop replication to make the Aurora read replica a standalone Aurora MySQL DB cluster. Be prepared for migration to take a while, roughly several hours per tebibyte (TiB) of data.

For a list of regions where Aurora is available, see Amazon Aurora in the *Amazon Web Services General Reference*.

When you create an Aurora read replica of an RDS for MySQL DB instance, Amazon RDS creates a DB snapshot of your source RDS for MySQL DB instance (private to Amazon RDS, and incurring no charges). Amazon RDS then migrates the data from the DB snapshot to the Aurora read replica. After the data from the DB snapshot has been migrated to the new Aurora MySQL DB cluster, Amazon RDS starts replication between your RDS for MySQL DB instance and the Aurora MySQL DB cluster. If your RDS for MySQL DB instance contains tables that use storage engines other than InnoDB, or that use compressed row format, you can speed up the process of creating an Aurora read replica by altering those tables to use the InnoDB storage engine and dynamic row format before you create your Aurora read replica. For more information about the process of copying a MySQL DB snapshot to an Aurora MySQL DB cluster, see Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster.

You can have only one Aurora read replica for an RDS for MySQL DB instance.

> **Note**
>
> Replication issues can arise due to feature differences between Aurora MySQL and the MySQL database engine version of your RDS for MySQL DB instance that is the replication primary. If you encounter an error, you can find help in the Amazon RDS community forum or by contacting Amazon Web Services Support.
>
> You can't create an Aurora read replica if your RDS for MySQL DB instance is already the source for a cross-Region read replica.

You can't migrate to Aurora MySQL version 3.05 and higher from some older RDS for MySQL 8.0 versions, including 8.0.11, 8.0.13, and 8.0.15. We recommend that you upgrade to RDS for MySQL version 8.0.28 before migrating.

For more information on MySQL read replicas, see Working with read replicas of MariaDB, MySQL, and PostgreSQL DB instances.

Creating an Aurora read replica

You can create an Aurora read replica for an RDS for MySQL DB instance by using the console, the Amazon CLI, or the RDS API.

Console

To create an Aurora read replica from a source RDS for MySQL DB instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the MySQL DB instance that you want to use as the source for your Aurora read replica.
4. For **Actions**, choose **Create Aurora read replica**.
5. Choose the DB cluster specifications you want to use for the Aurora read replica, as described in the following table.

Option	Description
DB instance class	Choose a DB instance class that defines the processin g and memory requirements for the primary instance in the DB cluster. For more information about DB instance class options, see Amazon AuroraDB instance classes.
Multi-AZ deployment	Choose **Create Replica in Different Zone** to create a standby replica of the new DB cluster in another Availability Zone in the target Amazon Region for failover support. For more information about multiple Availability Zones, see Regions and Availability Zones.

Option	Description
DB instance identifier	Type a name for the primary instance in your Aurora read replica DB cluster. This identifier is used in the endpoint address for the primary instance of the new DB cluster. The DB instance identifier has the following constrain ts: • It must contain from 1 to 63 alphanumeric characters or hyphens. • Its first character must be a letter. • It cannot end with a hyphen or contain two consecutive hyphens. • It must be unique for all DB instances for each Amazon account, for each Amazon Region. Because the Aurora read replica DB cluster is created from a snapshot of the source DB instance, the master user name and master password for the Aurora read replica are the same as the master user name and master password for the source DB instance.
Virtual Private Cloud (VPC)	Select the VPC to host the DB cluster. Select **Create new VPC** to have Aurora create a VPC for you. For more information, see DB cluster prerequisites.
DB subnet group	Select the DB subnet group to use for the DB cluster. Select **Create new DB subnet group** to have Aurora create a DB subnet group for you. For more informati on, see DB cluster prerequisites.

Option	Description
Public accessibility	Select `Yes` to give the DB cluster a public IP address; otherwise, select `No`. The instances in your DB cluster can be a mix of both public and private DB instances . For more information about hiding instances from public access, see Hiding a DB cluster in a VPC from the internet.
Availability zone	Determine if you want to specify a particular Availability Zone. For more information about Availability Zones, see Regions and Availability Zones.
VPC security group (firewall)	Select **Create new VPC security group** to have Aurora create a VPC security group for you. Select **Select existing VPC security groups** to specify one or more VPC security groups to secure network access to the DB cluster. For more information, see DB cluster prerequisites.
Database port	Specify the port for applications and utilities to use to access the database. Aurora MySQL DB clusters default to the default MySQL port, 3306. Firewalls at some companies block connections to this port. If your company firewall blocks the default port, choose another port for the new DB cluster.
DB parameter group	Select a DB parameter group for the Aurora MySQL DB cluster. Aurora has a default DB parameter group you can use, or you can create your own DB parameter group. For more information about DB parameter groups, see Parameter groups for Amazon Aurora.

Option	Description
DB cluster parameter group	Select a DB cluster parameter group for the Aurora MySQL DB cluster. Aurora has a default DB cluster parameter group you can use, or you can create your own DB cluster parameter group. For more informati on about DB cluster parameter groups, see Parameter groups for Amazon Aurora.
Encryption	Choose **Disable encryption** if you don't want your new Aurora DB cluster to be encrypted. Choose **Enable encryption** for your new Aurora DB cluster to be encrypted at rest. If you choose **Enable encryptio n**, you must choose a KMS key as the **Amazon KMS key** value. If your MySQL DB instance isn't encrypted, specify an encryption key to have your DB cluster encrypted at rest. If your MySQL DB instance is encrypted, specify an encryption key to have your DB cluster encrypted at rest using the specified encryption key. You can specify the encryption key used by the MySQL DB instance or a different key. You can't create an unencrypted DB cluster from an encrypted MySQL DB instance.
Priority	Choose a failover priority for the DB cluster. If you don't select a value, the default is **tier-1**. This priority determines the order in which Aurora Replicas are promoted when recovering from a primary instance failure. For more information, see Fault tolerance for an Aurora DB cluster.

Option	Description
Backup retention period	Select the length of time, from 1 to 35 days, that Aurora retains backup copies of the database. Backup copies can be used for point-in-time restores (PITR) of your database down to the second.
Enhanced Monitoring	Choose **Enable enhanced monitoring** to enable gathering metrics in real time for the operating system that your DB cluster runs on. For more information, see Monitoring OS metrics with Enhanced Monitoring.
Monitoring Role	Only available if **Enhanced Monitoring** is set to **Enable enhanced monitoring**. Choose the IAM role that you created to permit Aurora to communicate with Amazon CloudWatch Logs for you, or choose **Default** to have Aurora create a role for you named `rds-monitoring-role` . For more information, see Monitoring OS metrics with Enhanced Monitoring.
Granularity	Only available if **Enhanced Monitoring** is set to **Enable enhanced monitoring**. Set the interval, in seconds, between when metrics are collected for your DB cluster.
Auto minor version upgrade	This setting doesn't apply to Aurora MySQL DB clusters. For more information about engine updates for Aurora MySQL, see Database engine updates for Amazon Aurora MySQL.
Maintenance window	Select **Select window** and specify the weekly time range during which system maintenance can occur. Or, select **No preference** for Aurora to assign a period randomly.

6. Choose **Create read replica**.

Amazon CLI

To create an Aurora read replica from a source RDS for MySQL DB instance, use the `create-db-cluster` and `create-db-instance` Amazon CLI commands to create a new Aurora MySQL DB cluster. When you call the `create-db-cluster` command, include the `--replication-source-identifier` parameter to identify the Amazon Resource Name (ARN) for the source MySQL DB instance. For more information about Amazon RDS ARNs, see Amazon Relational Database Service (Amazon RDS).

Don't specify the master username, master password, or database name as the Aurora read replica uses the same master username, master password, and database name as the source MySQL DB instance.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster --db-cluster-identifier sample-replica-cluster --engine
 aurora \
    --db-subnet-group-name mysubnetgroup --vpc-security-group-ids sg-c7e5b0d2 \
    --replication-source-identifier arn:aws-cn:rds:us-west-2:123456789012:db:primary-
mysql-instance
```

For Windows:

```
aws rds create-db-cluster --db-cluster-identifier sample-replica-cluster --engine
 aurora ^
    --db-subnet-group-name mysubnetgroup --vpc-security-group-ids sg-c7e5b0d2 ^
    --replication-source-identifier arn:aws-cn:rds:us-west-2:123456789012:db:primary-
mysql-instance
```

If you use the console to create an Aurora read replica, then Aurora automatically creates the primary instance for your DB cluster Aurora read replica. If you use the Amazon CLI to create an Aurora read replica, you must explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster.

You can create a primary instance for your DB cluster by using the `create-db-instance` Amazon CLI command with the following parameters.

- `--db-cluster-identifier`

  The name of your DB cluster.
- `--db-instance-class`

The name of the DB instance class to use for your primary instance.

- `--db-instance-identifier`

  The name of your primary instance.

- `--engine aurora`

In this example, you create a primary instance named *myreadreplicainstance* for the DB cluster named *myreadreplicacluster*, using the DB instance class specified in *myinstanceclass*.

Example

For Linux, macOS, or Unix:

```
aws rds create-db-instance \
    --db-cluster-identifier myreadreplicacluster \
    --db-instance-class myinstanceclass \
    --db-instance-identifier myreadreplicainstance \
    --engine aurora
```

For Windows:

```
aws rds create-db-instance ^
    --db-cluster-identifier myreadreplicacluster ^
    --db-instance-class myinstanceclass ^
    --db-instance-identifier myreadreplicainstance ^
    --engine aurora
```

RDS API

To create an Aurora read replica from a source RDS for MySQL DB instance, use the `CreateDBCluster` and `CreateDBInstance` Amazon RDS API commands to create a new Aurora DB cluster and primary instance. Do not specify the master username, master password, or database name as the Aurora read replica uses the same master username, master password, and database name as the source RDS for MySQL DB instance.

You can create a new Aurora DB cluster for an Aurora read replica from a source RDS for MySQL DB instance by using the `CreateDBCluster` Amazon RDS API command with the following parameters:

- `DBClusterIdentifier`

  The name of the DB cluster to create.

- `DBSubnetGroupName`

  The name of the DB subnet group to associate with this DB cluster.

- `Engine=aurora`
- `KmsKeyId`

  The Amazon KMS key to optionally encrypt the DB cluster with, depending on whether your MySQL DB instance is encrypted.

  - If your MySQL DB instance isn't encrypted, specify an encryption key to have your DB cluster encrypted at rest. Otherwise, your DB cluster is encrypted at rest using the default encryption key for your account.
  - If your MySQL DB instance is encrypted, specify an encryption key to have your DB cluster encrypted at rest using the specified encryption key. Otherwise, your DB cluster is encrypted at rest using the encryption key for the MySQL DB instance.

  > **Note**
  >
  > You can't create an unencrypted DB cluster from an encrypted MySQL DB instance.

- `ReplicationSourceIdentifier`

  The Amazon Resource Name (ARN) for the source MySQL DB instance. For more information about Amazon RDS ARNs, see Amazon Relational Database Service (Amazon RDS).

- `VpcSecurityGroupIds`

  The list of EC2 VPC security groups to associate with this DB cluster.

In this example, you create a DB cluster named *`myreadreplicacluster`* from a source MySQL DB instance with an ARN set to *`mysqlprimaryARN`*, associated with a DB subnet group named *`mysubnetgroup`* and a VPC security group named *`mysecuritygroup`*.

Example

```
https://rds.us-east-1.amazonaws.com/
    ?Action=CreateDBCluster
```

```
    &DBClusterIdentifier=myreadreplicacluster
    &DBSubnetGroupName=mysubnetgroup
    &Engine=aurora
    &ReplicationSourceIdentifier=mysqlprimaryARN
    &SignatureMethod=HmacSHA256
    &SignatureVersion=4
    &Version=2014-10-31
    &VpcSecurityGroupIds=mysecuritygroup
    &X-Amz-Algorithm=AWS4-HMAC-SHA256
    &X-Amz-Credential=AKIADQKE4SARGYLE/20150927/us-east-1/rds/aws4_request
    &X-Amz-Date=20150927T164851Z
    &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
    &X-Amz-Signature=6a8f4bd6a98f649c75ea04a6b3929ecc75ac09739588391cd7250f5280e716db
```

If you use the console to create an Aurora read replica, then Aurora automatically creates the primary instance for your DB cluster Aurora read replica. If you use the Amazon CLI to create an Aurora read replica, you must explicitly create the primary instance for your DB cluster. The primary instance is the first instance that is created in a DB cluster.

You can create a primary instance for your DB cluster by using the `CreateDBInstance` Amazon RDS API command with the following parameters:

- `DBClusterIdentifier`

  The name of your DB cluster.
- `DBInstanceClass`

  The name of the DB instance class to use for your primary instance.
- `DBInstanceIdentifier`

  The name of your primary instance.
- `Engine=aurora`

In this example, you create a primary instance named *`myreadreplicainstance`* for the DB cluster named *`myreadreplicacluster`*, using the DB instance class specified in *`myinstanceclass`*.

Example

```
https://rds.us-east-1.amazonaws.com/
```

```
    ?Action=CreateDBInstance
    &DBClusterIdentifier=myreadreplicacluster
    &DBInstanceClass=myinstanceclass
    &DBInstanceIdentifier=myreadreplicainstance
    &Engine=aurora
    &SignatureMethod=HmacSHA256
    &SignatureVersion=4
    &Version=2014-09-01
    &X-Amz-Algorithm=AWS4-HMAC-SHA256
    &X-Amz-Credential=AKIADQKE4SARGYLE/20140424/us-east-1/rds/aws4_request
    &X-Amz-Date=20140424T194844Z
    &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
    &X-Amz-Signature=bee4aabc750bf7dad0cd9e22b952bd6089d91e2a16592c2293e532eeaab8bc77
```


Viewing an Aurora read replica

You can view the MySQL to Aurora MySQL replication relationships for your Aurora MySQL DB clusters by using the Amazon Web Services Management Console or the Amazon CLI.

Console

To view the primary MySQL DB instance for an Aurora read replica

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the DB cluster for the Aurora read replica to display its details. The primary MySQL DB instance information is in the **Replication source** field.

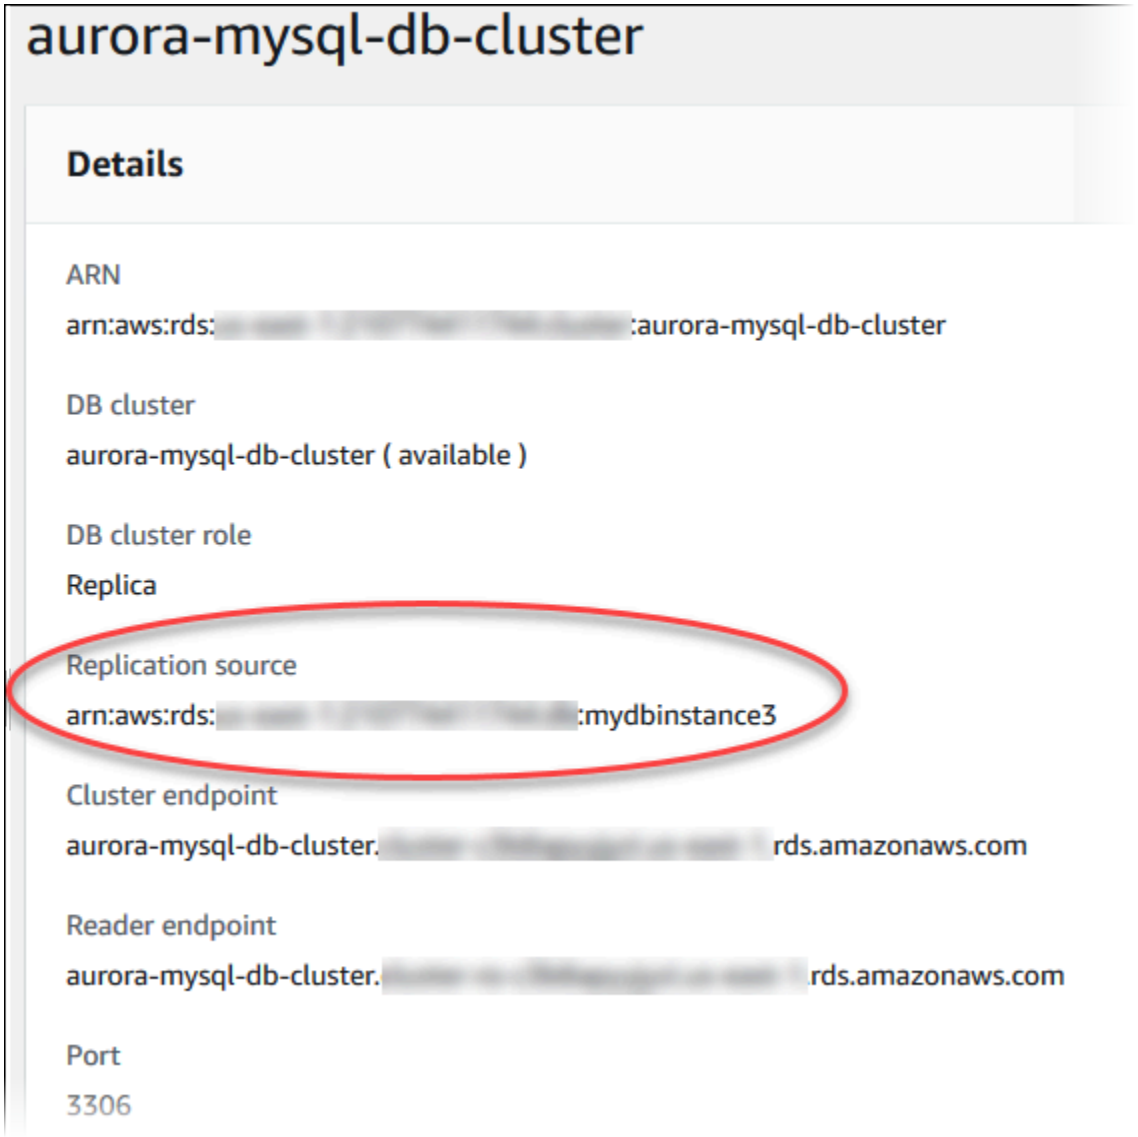

Amazon CLI

To view the MySQL to Aurora MySQL replication relationships for your Aurora MySQL DB clusters by using the Amazon CLI, use the `describe-db-clusters` and `describe-db-instances` commands.

To determine which MySQL DB instance is the primary, use the `describe-db-clusters` and specify the cluster identifier of the Aurora read replica for the `--db-cluster-identifier` option. Refer to the `ReplicationSourceIdentifier` element in the output for the ARN of the DB instance that is the replication primary.

To determine which DB cluster is the Aurora read replica, use the `describe-db-instances` and specify the instance identifier of the MySQL DB instance for the `--db-instance-identifier` option. Refer to the `ReadReplicaDBClusterIdentifiers` element in the output for the DB cluster identifier of the Aurora read replica.

Example

For Linux, macOS, or Unix:

```
aws rds describe-db-clusters \
    --db-cluster-identifier myreadreplicacluster
```

```
aws rds describe-db-instances \
    --db-instance-identifier mysqlprimary
```

For Windows:

```
aws rds describe-db-clusters ^
    --db-cluster-identifier myreadreplicacluster
```

```
aws rds describe-db-instances ^
    --db-instance-identifier mysqlprimary
```

Promoting an Aurora read replica

After migration completes, you can promote the Aurora read replica to a stand-alone DB cluster using the Amazon Web Services Management Console or Amazon CLI.

Then you can direct your client applications to the endpoint for the Aurora read replica. For more information on the Aurora endpoints, see Amazon Aurora endpoint connections. Promotion should complete fairly quickly, and you can read from and write to the Aurora read replica during promotion. However, you can't delete the primary MySQL DB instance or unlink the DB Instance and the Aurora read replica during this time.

Before you promote your Aurora read replica, stop any transactions from being written to the source MySQL DB instance, and then wait for the replica lag on the Aurora read replica to reach 0. You can view the replica lag for an Aurora read replica by calling the `SHOW SLAVE STATUS` (Aurora MySQL version 2) or `SHOW REPLICA STATUS` (Aurora MySQL version 3) command on your Aurora read replica. Check the **Seconds behind master** value.

You can start writing to the Aurora read replica after write transactions to the primary have stopped and replica lag is 0. If you write to the Aurora read replica before this and you modify tables that are also being modified on the MySQL primary, you risk breaking replication to Aurora. If this happens, you must delete and recreate your Aurora read replica.

Console

To promote an Aurora read replica to an Aurora DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the DB cluster for the Aurora read replica.
4. For **Actions**, choose **Promote**.
5. Choose **Promote read replica**.

After you promote, confirm that the promotion has completed by using the following procedure.

To confirm that the Aurora read replica was promoted

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Events**.
3. On the **Events** page, verify that there is a `Promoted Read Replica cluster to a stand-alone database cluster` event for the cluster that you promoted.

After promotion is complete, the primary MySQL DB instance and the Aurora read replica are unlinked, and you can safely delete the DB instance if you want.

Amazon CLI

To promote an Aurora read replica to a stand-alone DB cluster, use the `promote-read-replica-db-cluster` Amazon CLI command.

Example

For Linux, macOS, or Unix:

```
aws rds promote-read-replica-db-cluster \
    --db-cluster-identifier myreadreplicacluster
```

For Windows:

```
aws rds promote-read-replica-db-cluster ^
    --db-cluster-identifier myreadreplicacluster
```

Managing Amazon Aurora MySQL

The following sections discuss managing an Amazon Aurora MySQL DB cluster.

Topics

- Managing performance and scaling for Amazon Aurora MySQL
- Backtracking an Aurora DB cluster
- Testing Amazon Aurora MySQL using fault injection queries
- Altering tables in Amazon Aurora using Fast DDL
- Displaying volume status for an Aurora MySQL DB cluster
- Transaction timeout in Amazon Aurora MySQL

Managing performance and scaling for Amazon Aurora MySQL

Scaling Aurora MySQL DB instances

You can scale Aurora MySQL DB instances in two ways, instance scaling and read scaling. For more information about read scaling, see Read scaling.

You can scale your Aurora MySQL DB cluster by modifying the DB instance class for each DB instance in the DB cluster. Aurora MySQL supports several DB instance classes optimized for Aurora. Don't use db.t2 or db.t3 instance classes for larger Aurora clusters of size greater than 40 TB. For the specifications of the DB instance classes supported by Aurora MySQL, see Amazon AuroraDB instance classes.

> **Note**
>
> We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see Using T instance classes for development and testing.

Maximum connections to an Aurora MySQL DB instance

The maximum number of connections allowed to an Aurora MySQL DB instance is determined by the `max_connections` parameter in the instance-level parameter group for the DB instance.

The following table lists the resulting default value of `max_connections` for each DB instance class available to Aurora MySQL. You can increase the maximum number of connections to your Aurora MySQL DB instance by scaling the instance up to a DB instance class with more memory, or by setting a larger value for the `max_connections` parameter in the DB parameter group for your instance. The maximum value is 50,000 for Aurora MySQL version 8.4.10 and higher, and 16,000 for all other versions.

Recommendations for configuring more than 16,000 connections

- **Use a DB instance class of 24xlarge or larger.** Each connection consumes memory and CPU resources, including connections that are idle. On smaller DB instance classes, maintaining a very large number of connections can significantly increase query latency.
- **Plan capacity based on the number of concurrently active connections.** A connection pool in which most connections are idle has limited impact on performance. However, as the number of concurrently active connections increases, throughput per connection decreases and query latency increases. Size your DB instance for the peak number of connections that you expect to be active at the same time.
- **Avoid opening a large number of connections simultaneously.** When many connection requests arrive at the same time, Aurora MySQL admits them progressively. During this period, individual connection attempts can take significantly longer to complete. However, Aurora MySQL doesn't refuse them unless the total number of connections would exceed the `max_connections` value. To maintain predictable connection latency, increase the size of connection pools gradually, or use Amazon RDS Proxy to manage connections.

> **Tip**
>
> If your applications frequently open and close connections, or keep a large number of long-lived connections open, we recommend that you use Amazon RDS Proxy. RDS Proxy is a fully managed, highly available database proxy that uses connection pooling to share database connections securely and efficiently. To learn more about RDS Proxy, see Amazon RDS Proxy for Aurora.

For details about how Aurora serverless instances handle this parameter, see Maximum connections for Aurora serverless.

Instance class	max_connections default value		
db.t2.small	45		
db.t2.medium	90		
db.t3.small	45		
db.t3.medium	90		
db.t3.large	135		
db.t4g.medium	90		
db.t4g.large	135		
db.r3.large	1000		
db.r3.xlarge	2000		
db.r3.2xlarge	3000		
db.r3.4xlarge	4000		
db.r3.8xlarge	5000		
db.r4.large	1000		
db.r4.xlarge	2000		
db.r4.2xlarge	3000		
db.r4.4xlarge	4000		
db.r4.8xlarge	5000		
db.r4.16xlarge	6000		

Instance class	max_connections default value
db.r5.large	1000
db.r5.xlarge	2000
db.r5.2xlarge	3000
db.r5.4xlarge	4000
db.r5.8xlarge	5000
db.r5.12xlarge	6000
db.r5.16xlarge	6000
db.r5.24xlarge	7000
db.r6g.large	1000
db.r6g.xlarge	2000
db.r6g.2xlarge	3000
db.r6g.4xlarge	4000
db.r6g.8xlarge	5000
db.r6g.12xlarge	6000
db.r6g.16xlarge	6000
db.r6i.large	1000
db.r6i.xlarge	2000
db.r6i.2xlarge	3000
db.r6i.4xlarge	4000

Instance class	max_connections default value
db.r6i.8xlarge	5000
db.r6i.12xlarge	6000
db.r6i.16xlarge	6000
db.r6i.24xlarge	7000
db.r6i.32xlarge	7000
db.r7g.large	1000
db.r7g.xlarge	2000
db.r7g.2xlarge	3000
db.r7g.4xlarge	4000
db.r7g.8xlarge	5000
db.r7g.12xlarge	6000
db.r7g.16xlarge	6000
db.r7i.large	1000
db.r7i.xlarge	2000
db.r7i.2xlarge	3000
db.r7i.4xlarge	4000
db.r7i.8xlarge	5000
db.r7i.12xlarge	6000
db.r7i.16xlarge	6000

Instance class	max_connections default value
db.r7i.24xlarge	7000
db.r7i.48xlarge	8000
db.r8g.large	1000
db.r8g.xlarge	2000
db.r8g.2xlarge	3000
db.r8g.4xlarge	4000
db.r8g.8xlarge	5000
db.r8g.12xlarge	6000
db.r8g.16xlarge	6000
db.r8g.24xlarge	7000
db.r8g.48xlarge	8000
db.x2g.large	2000
db.x2g.xlarge	3000
db.x2g.2xlarge	4000
db.x2g.4xlarge	5000
db.x2g.8xlarge	6000
db.x2g.12xlarge	7000
db.x2g.16xlarge	7000

Tip

The `max_connections` parameter calculation uses log base 2 (distinct from natural logarithm) and the `DBInstanceClassMemory` value in bytes for the selected Aurora MySQL instance class. The parameter accepts only integer values, with decimal portions truncated from calculations. The formula implements connection limits as follows:

- 1000 connection increment for larger R3, R4, and R5 instances
- 45 connection increment for T2 and T3 instance memory variants

Example: For db.r6g.large, while the formula calculates 1069.2, the system implements 1000 to maintain consistent incremental patterns.

If you create a new parameter group to customize your own default for the connection limit, you'll see that the default connection limit is derived using a formula based on the `DBInstanceClassMemory` value. As shown in the preceding table, the formula produces connection limits that increase by 1000 as the memory doubles between progressively larger R3, R4, and R5 instances, and by 45 for different memory sizes of T2 and T3 instances.

See Specifying DB parameters for more details on how `DBInstanceClassMemory` is calculated.

Aurora MySQL and RDS for MySQL DB instances have different amounts of memory overhead. Therefore, the `max_connections` value can be different for Aurora MySQL and RDS for MySQL DB instances that use the same instance class. The values in the table only apply to Aurora MySQL DB instances.

Note

The much lower connectivity limits for T2 and T3 instances are because with Aurora, those instance classes are intended only for development and test scenarios, not for production workloads.

The default connection limits are tuned for systems that use the default values for other major memory consumers, such as the buffer pool and query cache. If you change those other settings for your cluster, consider adjusting the connection limit to account for the increase or decrease in available memory on the DB instances.

Temporary storage limits for Aurora MySQL

Aurora MySQL stores tables and indexes in the Aurora storage subsystem. Aurora MySQL uses separate temporary or local storage for nonpersistent temporary files and non-InnoDB temporary tables. Local storage also includes files that are used for such purposes as sorting large datasets during query processing or for index build operations. It doesn't include InnoDB temporary tables.

For more information on temporary tables in Aurora MySQL version 3, see New temporary table behavior in Aurora MySQL version 3. For more information on temporary tables in version 2, see Temporary tablespace behavior in Aurora MySQL version 2.

The data and temporary files on these volumes are lost when starting and stopping the DB instance, and during host replacement.

These local storage volumes are backed by Amazon Elastic Block Store (EBS) and can be extended by using a larger DB instance class. For more information about storage, see Amazon Aurora storage.

Local storage is also used for importing data from Amazon S3 using `LOAD DATA FROM S3` or `LOAD XML FROM S3`, and for exporting data to S3 using SELECT INTO OUTFILE S3. For more information on importing from and exporting to S3, see the following:

- Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket
- Saving data from an Amazon Aurora MySQL DB cluster into text files in an Amazon S3 bucket

Aurora MySQL uses separate permanent storage for error logs, general logs, slow query logs, and audit logs for most of the Aurora MySQL DB instance classes (not including burstable-performance instance class types such as db.t2, db.t3, and db.t4g). The data on this volume is retained when starting and stopping the DB instance, and during host replacement.

This permanent storage volume is also backed by Amazon EBS and has a fixed size according to the DB instance class. It can't be extended by using a larger DB instance class.

The following table shows the maximum amount of temporary and permanent storage available for each Aurora MySQL DB instance class. For more information on DB instance class support for Aurora, see Amazon AuroraDB instance classes.

DB instance class	Maximum temporary/local storage available (GiB)	Additional maximum storage available for log files (GiB)
db.x2g.16xlarge	1280	500
db.x2g.12xlarge	960	500
db.x2g.8xlarge	640	500
db.x2g.4xlarge	320	500
db.x2g.2xlarge	160	60
db.x2g.xlarge	80	60
db.x2g.large	40	60
db.r8g.48xlarge	3840	500
db.r8g.24xlarge	1920	500
db.r8g.16xlarge	1280	500
db.r8g.12xlarge	960	500
db.r8g.8xlarge	640	500
db.r8g.4xlarge	320	500
db.r8g.2xlarge	160	60
db.r8g.xlarge	80	60
db.r8g.large	32	60
db.r7i.48xlarge	3840	500
db.r7i.24xlarge	1920	500
db.r7i.16xlarge	1280	500
db.r7i.12xlarge	960	500

DB instance class	Maximum temporary/local storage available (GiB)	Additional maximum storage available for log files (GiB)
db.r7i.8xlarge	640	500
db.r7i.4xlarge	320	500
db.r7i.2xlarge	160	60
db.r7i.xlarge	80	60
db.r7i.large	32	60
db.r7g.16xlarge	1280	500
db.r7g.12xlarge	960	500
db.r7g.8xlarge	640	500
db.r7g.4xlarge	320	500
db.r7g.2xlarge	160	60
db.r7g.xlarge	80	60
db.r7g.large	32	60
db.r6i.32xlarge	2560	500
db.r6i.24xlarge	1920	500
db.r6i.16xlarge	1280	500
db.r6i.12xlarge	960	500
db.r6i.8xlarge	640	500
db.r6i.4xlarge	320	500
db.r6i.2xlarge	160	60
db.r6i.xlarge	80	60

DB instance class	Maximum temporary/local storage available (GiB)	Additional maximum storage available for log files (GiB)
db.r6i.large	32	60
db.r6g.16xlarge	1280	500
db.r6g.12xlarge	960	500
db.r6g.8xlarge	640	500
db.r6g.4xlarge	320	500
db.r6g.2xlarge	160	60
db.r6g.xlarge	80	60
db.r6g.large	32	60
db.r5.24xlarge	1920	500
db.r5.16xlarge	1280	500
db.r5.12xlarge	960	500
db.r5.8xlarge	640	500
db.r5.4xlarge	320	500
db.r5.2xlarge	160	60
db.r5.xlarge	80	60
db.r5.large	32	60
db.r4.16xlarge	1280	500
db.r4.8xlarge	640	500
db.r4.4xlarge	320	500
db.r4.2xlarge	160	60

DB instance class	Maximum temporary/local storage available (GiB)	Additional maximum storage available for log files (GiB)
db.r4.xlarge	80	60
db.r4.large	32	60
db.t4g.large	32	–
db.t4g.medium	32	–
db.t3.large	32	–
db.t3.medium	32	–
db.t3.small	32	–
db.t2.medium	32	–
db.t2.small	32	–

Important

These values represent the theoretical maximum amount of free storage on each DB instance. The actual local storage available to you might be lower. Aurora uses some local storage for its management processes, and the DB instance uses some local storage even before you load any data. You can monitor the temporary storage available for a specific DB instance with the `FreeLocalStorage` CloudWatch metric, described in Amazon CloudWatch metrics for Amazon Aurora. You can check the amount of free storage at the present time. You can also chart the amount of free storage over time. Monitoring the free storage over time helps you to determine whether the value is increasing or decreasing, or to find the minimum, maximum, or average values.
(This doesn't apply to Aurora serverless.)

Backtracking an Aurora DB cluster

With Amazon Aurora MySQL-Compatible Edition, you can backtrack a DB cluster to a specific time, without restoring data from a backup.

> **Important**
>
> Backtracking is supported in Aurora MySQL version 2, version 3, and version 8.4.

Contents

- Overview of backtracking
  - Backtrack window
  - Backtracking time
  - Backtracking limitations
- Region and version availability
- Upgrade considerations for backtrack-enabled clusters
- Configuring backtracking a Aurora MySQL DB cluster
- Performing a backtrack for an Aurora MySQL DB cluster
- Monitoring backtracking for an Aurora MySQL DB cluster
- Subscribing to a backtrack event with the console
- Retrieving existing backtracks
- Disabling backtracking for an Aurora MySQL DB cluster

Overview of backtracking

Backtracking "rewinds" the DB cluster to the time you specify. Backtracking is not a replacement for backing up your DB cluster so that you can restore it to a point in time. However, backtracking provides the following advantages over traditional backup and restore:

- You can easily undo mistakes. If you mistakenly perform a destructive action, such as a DELETE without a WHERE clause, you can backtrack the DB cluster to a time before the destructive action with minimal interruption of service.

- You can backtrack a DB cluster quickly. Restoring a DB cluster to a point in time launches a new DB cluster and restores it from backup data or a DB cluster snapshot, which can take hours. Backtracking a DB cluster doesn't require a new DB cluster and rewinds the DB cluster in minutes.
- You can explore earlier data changes. You can repeatedly backtrack a DB cluster back and forth in time to help determine when a particular data change occurred. For example, you can backtrack a DB cluster three hours and then backtrack forward in time one hour. In this case, the backtrack time is two hours before the original time.

> **Note**
>
> For information about restoring a DB cluster to a point in time, see Overview of backing up and restoring an Aurora DB cluster.

Backtrack window

With backtracking, there is a target backtrack window and an actual backtrack window:

- The *target backtrack window* is the amount of time you want to be able to backtrack your DB cluster. When you enable backtracking, you specify a *target backtrack window*. For example, you might specify a target backtrack window of 24 hours if you want to be able to backtrack the DB cluster one day.
- The *actual backtrack window* is the actual amount of time you can backtrack your DB cluster, which can be smaller than the target backtrack window. The actual backtrack window is based on your workload and the storage available for storing information about database changes, called *change records.*

As you make updates to your Aurora DB cluster with backtracking enabled, you generate change records. Aurora retains change records for the target backtrack window, and you pay an hourly rate for storing them. Both the target backtrack window and the workload on your DB cluster determine the number of change records you store. The workload is the number of changes you make to your DB cluster in a given amount of time. If your workload is heavy, you store more change records in your backtrack window than you do if your workload is light.

You can think of your target backtrack window as the goal for the maximum amount of time you want to be able to backtrack your DB cluster. In most cases, you can backtrack the maximum amount of time that you specified. However, in some cases, the DB cluster can't store enough

change records to backtrack the maximum amount of time, and your actual backtrack window is smaller than your target. Typically, the actual backtrack window is smaller than the target when you have extremely heavy workload on your DB cluster. When your actual backtrack window is smaller than your target, we send you a notification.

When backtracking is enabled for a DB cluster, and you delete a table stored in the DB cluster, Aurora keeps that table in the backtrack change records. It does this so that you can revert back to a time before you deleted the table. If you don't have enough space in your backtrack window to store the table, the table might be removed from the backtrack change records eventually.

Backtracking time

Aurora always backtracks to a time that is consistent for the DB cluster. Doing so eliminates the possibility of uncommitted transactions when the backtrack is complete. When you specify a time for a backtrack, Aurora automatically chooses the nearest possible consistent time. This approach means that the completed backtrack might not exactly match the time you specify, but you can determine the exact time for a backtrack by using the describe-db-cluster-backtracks Amazon CLI command. For more information, see Retrieving existing backtracks.

Backtracking limitations

The following limitations apply to backtracking:

- Backtracking is only available for DB clusters that were created with the Backtrack feature enabled. You can't modify a DB cluster to enable the Backtrack feature. You can enable the Backtrack feature when you create a new DB cluster or restore a snapshot of a DB cluster.
- The limit for a backtrack window is 72 hours.
- Backtracking affects the entire DB cluster. For example, you can't selectively backtrack a single table or a single data update.
- You can't create cross-Region read replicas from a backtrack-enabled cluster, but you can still enable binary log (binlog) replication on the cluster. If you try to backtrack a DB cluster for which binary logging is enabled, an error typically occurs unless you choose to force the backtrack. Any attempts to force a backtrack will break downstream read replicas and interfere with other operations such as blue/green deployments.
- You can't backtrack a database clone to a time before that database clone was created. However, you can use the original database to backtrack to a time before the clone was created. For more information about database cloning, see Cloning a volume for an Amazon Aurora DB cluster.

- Backtracking causes a brief DB instance disruption. You must stop or pause your applications before starting a backtrack operation to ensure that there are no new read or write requests. During the backtrack operation, Aurora pauses the database, closes any open connections, and drops any uncommitted reads and writes. It then waits for the backtrack operation to complete.
- You can't restore a cross-Region snapshot of a backtrack-enabled cluster in an Amazon Region that doesn't support backtracking.
- If you perform an in-place upgrade for a backtrack-enabled cluster from Aurora MySQL version 2 to version 3, or from version 3 to version 8.4, you can't backtrack to a point in time before the upgrade happened.

Region and version availability

Backtrack is not available for Aurora PostgreSQL.

Following are the supported engines and Region availability for Backtrack with Aurora MySQL.

Region	Aurora MySQL version 8.4	Aurora MySQL version 3	Aurora MySQL version 2
US East (N. Virginia)	All versions	All versions	All versions
US East (Ohio)	All versions	All versions	All versions
US West (N. California)	All versions	All versions	All versions
US West (Oregon)	All versions	All versions	All versions
Africa (Cape Town)	–	–	–

Region	Aurora MySQL version 8.4	Aurora MySQL version 3	Aurora MySQL version 2
Asia Pacific (Hong Kong)	–	–	–
Asia Pacific (Jakarta)	–	–	–
Asia Pacific (Malaysia)	–	–	–
Asia Pacific (Melbourne)	–	–	–
Asia Pacific (Mumbai)	All versions	All versions	All versions
Asia Pacific (New Zealand)	–	–	–
Asia Pacific (Osaka)	All versions	All versions	Version 2.07.3 and higher
Asia Pacific (Seoul)	All versions	All versions	All versions
Asia Pacific (Singapore)	All versions	All versions	All versions
Asia Pacific (Sydney)	All versions	All versions	All versions
Asia Pacific (Taipei)	–	–	–

Region	Aurora MySQL version 8.4	Aurora MySQL version 3	Aurora MySQL version 2
Asia Pacific (Thailand)	–	–	–
Asia Pacific (Tokyo)	All versions	All versions	All versions
Canada (Central)	All versions	All versions	All versions
Canada West (Calgary)	–	–	–
China (Beijing)	–	–	–
China (Ningxia)	–	–	–
Europe (Frankfurt)	All versions	All versions	All versions
Europe (Ireland)	All versions	All versions	All versions
Europe (London)	All versions	All versions	All versions
Europe (Milan)	–	–	–
Europe (Paris)	All versions	All versions	All versions
Europe (Spain)	–	–	–

Region	Aurora MySQL version 8.4	Aurora MySQL version 3	Aurora MySQL version 2
Europe (Stockholm)	–	–	–
Europe (Zurich)	–	–	–
Israel (Tel Aviv)	–	–	–
Mexico (Central)	–	–	–
Middle East (Bahrain)	–	–	–
Middle East (UAE)	–	–	–
South America (São Paulo)	–	–	–
Amazon GovCloud (US-East)	–	–	–
Amazon GovCloud (US-West)	–	–	–

Upgrade considerations for backtrack-enabled clusters

You can upgrade a backtrack-enabled DB cluster from Aurora MySQL version 2 to version 3, or from version 3 to version 8.4, because all minor versions of Aurora MySQL version 3 and version 8.4 are supported for Backtrack.

Configuring backtracking a Aurora MySQL DB cluster

To use the Backtrack feature, you must enable backtracking and specify a target backtrack window. Otherwise, backtracking is disabled.

For the target backtrack window, specify the amount of time that you want to be able to rewind your database using Backtrack. Aurora tries to retain enough change records to support that window of time.

Console

You can use the console to configure backtracking when you create a new DB cluster. You can also modify a DB cluster to change the backtrack window for a backtrack-enabled cluster. If you turn off backtracking entirely for a cluster by setting the backtrack window to 0, you can't enable backtrack again for that cluster.


Topics

- Configuring backtracking with the console when creating a DB cluster
- Configuring backtrack with the console when modifying a DB cluster

Configuring backtracking with the console when creating a DB cluster

When you create a new Aurora MySQL DB cluster, backtracking is configured when you choose **Enable Backtrack** and specify a **Target Backtrack window** value that is greater than zero in the **Backtrack** section.

To create a DB cluster, follow the instructions in Creating an Amazon Aurora DB cluster. The following image shows the **Backtrack** section.

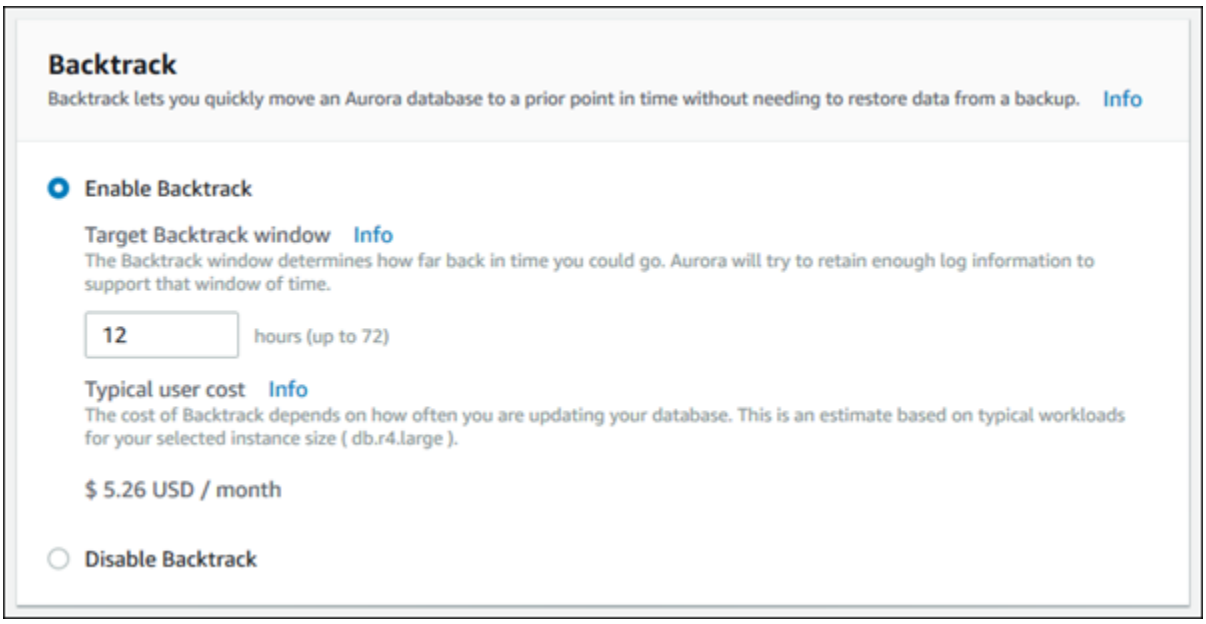

When you create a new DB cluster, Aurora has no data for the DB cluster's workload. So it can't estimate a cost specifically for the new DB cluster. Instead, the console presents a typical user cost for the specified target backtrack window based on a typical workload. The typical cost is meant to provide a general reference for the cost of the Backtrack feature.

> **Important**
>
> Your actual cost might not match the typical cost, because your actual cost is based on your DB cluster's workload.


Configuring backtrack with the console when modifying a DB cluster

You can modify backtracking for a DB cluster using the console.

> **Note**
>
> Currently, you can modify backtracking only for a DB cluster that has the Backtrack feature enabled. The **Backtrack** section doesn't appear for a DB cluster that was created with the Backtrack feature disabled or if the Backtrack feature has been disabled for the DB cluster.

To modify backtracking for a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose the cluster that you want to modify, and choose **Modify**.
4. For **Target Backtrack window**, modify the amount of time that you want to be able to backtrack. The limit is 72 hours.

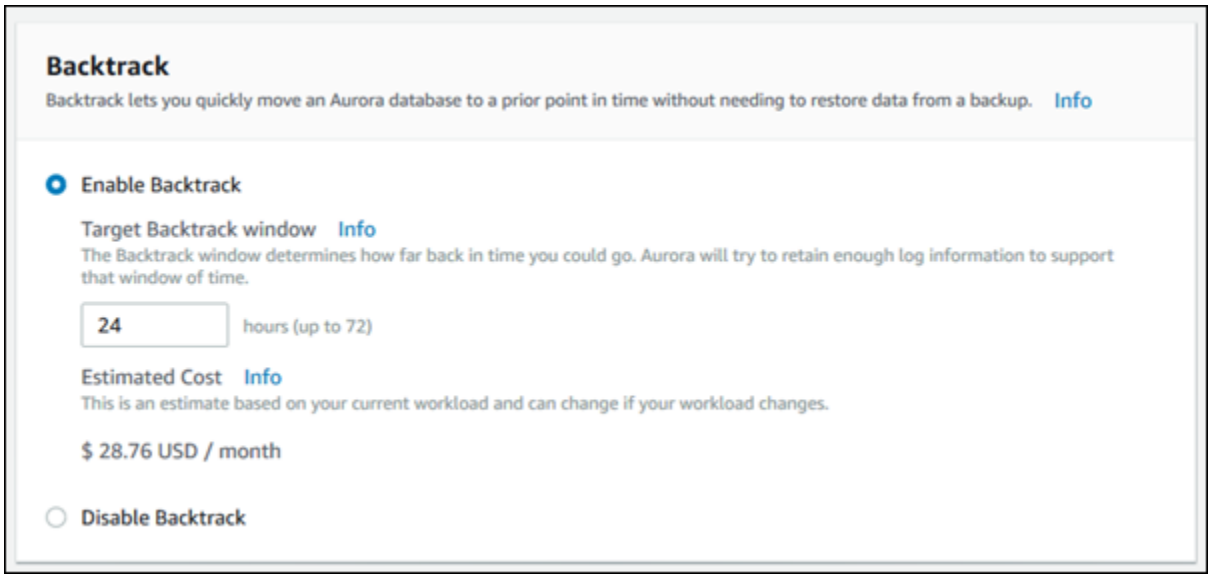

   The console shows the estimated cost for the amount of time you specified based on the DB cluster's past workload:

   - If backtracking was disabled on the DB cluster, the cost estimate is based on the `VolumeWriteIOPS` metric for the DB cluster in Amazon CloudWatch.
   - If backtracking was enabled previously on the DB cluster, the cost estimate is based on the `BacktrackChangeRecordsCreationRate` metric for the DB cluster in Amazon CloudWatch.
5. Choose **Continue**.
6. For **Scheduling of Modifications**, choose one of the following:

   - **Apply during the next scheduled maintenance window** – Wait to apply the **Target Backtrack window** modification until the next maintenance window.
   - **Apply immediately** – Apply the **Target Backtrack window** modification as soon as possible.
7. Choose **Modify cluster**.

Amazon CLI

When you create a new Aurora MySQL DB cluster using the create-db-cluster Amazon CLI command, backtracking is configured when you specify a `--backtrack-window` value that is greater than zero. The `--backtrack-window` value specifies the target backtrack window. For more information, see Creating an Amazon Aurora DB cluster.

You can also specify the `--backtrack-window` value using the following Amazon CLI commands:

- modify-db-cluster
- restore-db-cluster-from-s3
- restore-db-cluster-from-snapshot
- restore-db-cluster-to-point-in-time

The following procedure describes how to modify the target backtrack window for a DB cluster using the Amazon CLI.

To modify the target backtrack window for a DB cluster using the Amazon CLI

- Call the modify-db-cluster Amazon CLI command and supply the following values:
  - `--db-cluster-identifier` – The name of the DB cluster.
  - `--backtrack-window` – The maximum number of seconds that you want to be able to backtrack the DB cluster.

  The following example sets the target backtrack window for `sample-cluster` to one day (86,400 seconds).

  For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier sample-cluster \
    --backtrack-window 86400
```

  For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier sample-cluster ^
    --backtrack-window 86400
```

> **Note**
>
> Currently, you can enable backtracking only for a DB cluster that was created with the Backtrack feature enabled.

RDS API

When you create a new Aurora MySQL DB cluster using the CreateDBCluster Amazon RDS API operation, backtracking is configured when you specify a `BacktrackWindow` value that is greater than zero. The `BacktrackWindow` value specifies the target backtrack window for the DB cluster specified in the `DBClusterIdentifier` value. For more information, see Creating an Amazon Aurora DB cluster.

You can also specify the `BacktrackWindow` value using the following API operations:

- ModifyDBCluster
- RestoreDBClusterFromS3
- RestoreDBClusterFromSnapshot
- RestoreDBClusterToPointInTime

> **Note**
>
> Currently, you can enable backtracking only for a DB cluster that was created with the Backtrack feature enabled.

Performing a backtrack for an Aurora MySQL DB cluster

You can backtrack a DB cluster to a specified backtrack time stamp. If the backtrack time stamp isn't earlier than the earliest possible backtrack time, and isn't in the future, the DB cluster is backtracked to that time stamp.

Otherwise, an error typically occurs. Also, if you try to backtrack a DB cluster for which binary logging is enabled, an error typically occurs unless you've chosen to force the backtrack to occur. Forcing a backtrack to occur can interfere with other operations that use binary logging.

Important

Backtracking doesn't generate binlog entries for the changes that it makes. If you have binary logging enabled for the DB cluster, backtracking might not be compatible with your binlog implementation.

Note


For database clones, you can't backtrack the DB cluster earlier than the date and time when the clone was created. For more information about database cloning, see Cloning a volume for an Amazon Aurora DB cluster.

Console

The following procedure describes how to perform a backtrack operation for a DB cluster using the console.

To perform a backtrack operation using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Instances**.
3. Choose the primary instance for the DB cluster that you want to backtrack.
4. For **Actions**, choose **Backtrack DB cluster**.
5. On the **Backtrack DB cluster** page, enter the backtrack time stamp to backtrack the DB cluster to.

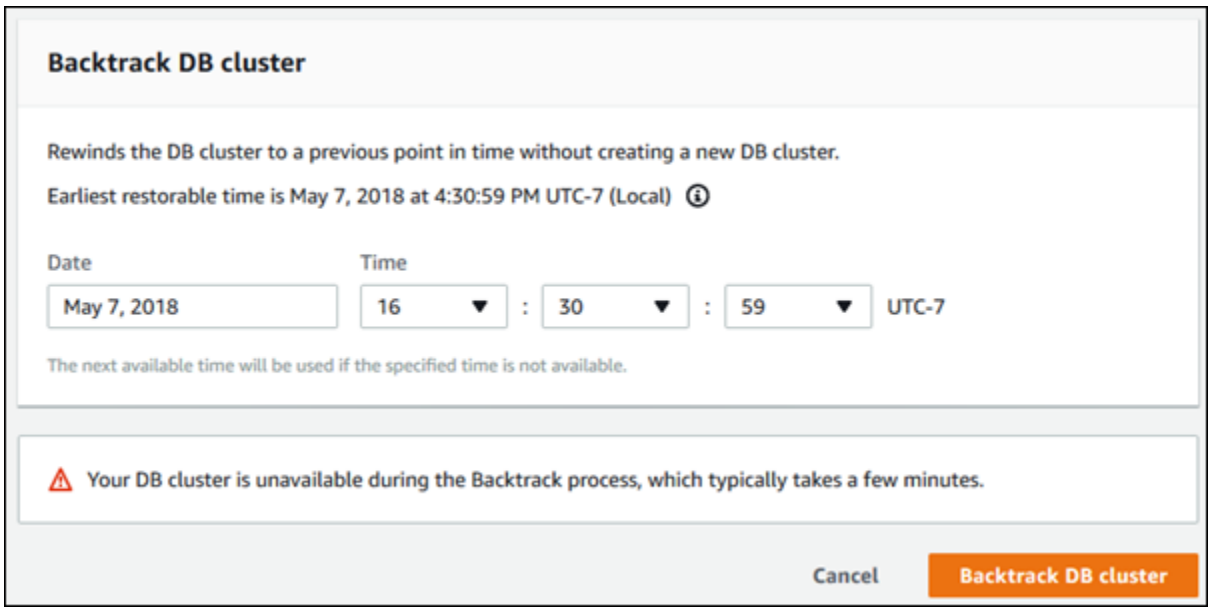

6. Choose **Backtrack DB cluster**.

Amazon CLI

The following procedure describes how to backtrack a DB cluster using the Amazon CLI.

To backtrack a DB cluster using the Amazon CLI

- Call the backtrack-db-cluster Amazon CLI command and supply the following values:
  - `--db-cluster-identifier` – The name of the DB cluster.
  - `--backtrack-to` – The backtrack time stamp to backtrack the DB cluster to, specified in ISO 8601 format.

  The following example backtracks the DB cluster `sample-cluster` to March 19, 2018, at 10 a.m.

  For Linux, macOS, or Unix:

```
aws rds backtrack-db-cluster \
    --db-cluster-identifier sample-cluster \
    --backtrack-to 2018-03-19T10:00:00+00:00
```

  For Windows:

```
aws rds backtrack-db-cluster ^
    --db-cluster-identifier sample-cluster ^
    --backtrack-to 2018-03-19T10:00:00+00:00
```

RDS API

To backtrack a DB cluster using the Amazon RDS API, use the BacktrackDBCluster operation. This operation backtracks the DB cluster specified in the `DBClusterIdentifier` value to the specified time.

Monitoring backtracking for an Aurora MySQL DB cluster


You can view backtracking information and monitor backtracking metrics for a DB cluster.

Console

To view backtracking information and monitor backtracking metrics using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose the DB cluster name to open information about it.

   The backtrack information is in the **Backtrack** section.

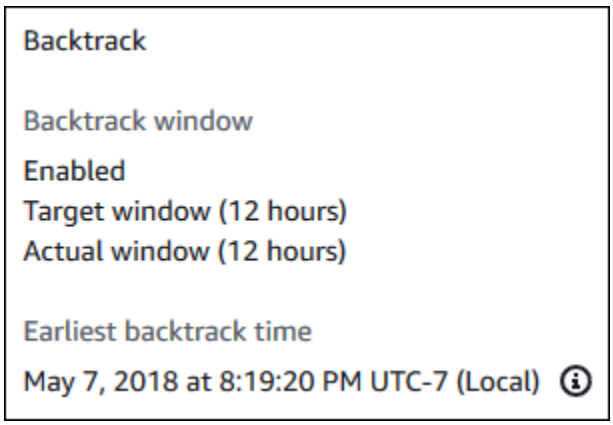   When backtracking is enabled, the following information is available:


- **Target window** – The current amount of time specified for the target backtrack window. The target is the maximum amount of time that you can backtrack if there is sufficient storage.
- **Actual window** – The actual amount of time you can backtrack, which can be smaller than the target backtrack window. The actual backtrack window is based on your workload and the storage available for retaining backtrack change records.
- **Earliest backtrack time** – The earliest possible backtrack time for the DB cluster. You can't backtrack the DB cluster to a time before the displayed time.

4. Do the following to view backtracking metrics for the DB cluster:

   a. In the navigation pane, choose **Instances**.

   b. Choose the name of the primary instance for the DB cluster to display its details.

   c. In the **CloudWatch** section, type **`Backtrack`** into the **CloudWatch** box to show only the Backtrack metrics.

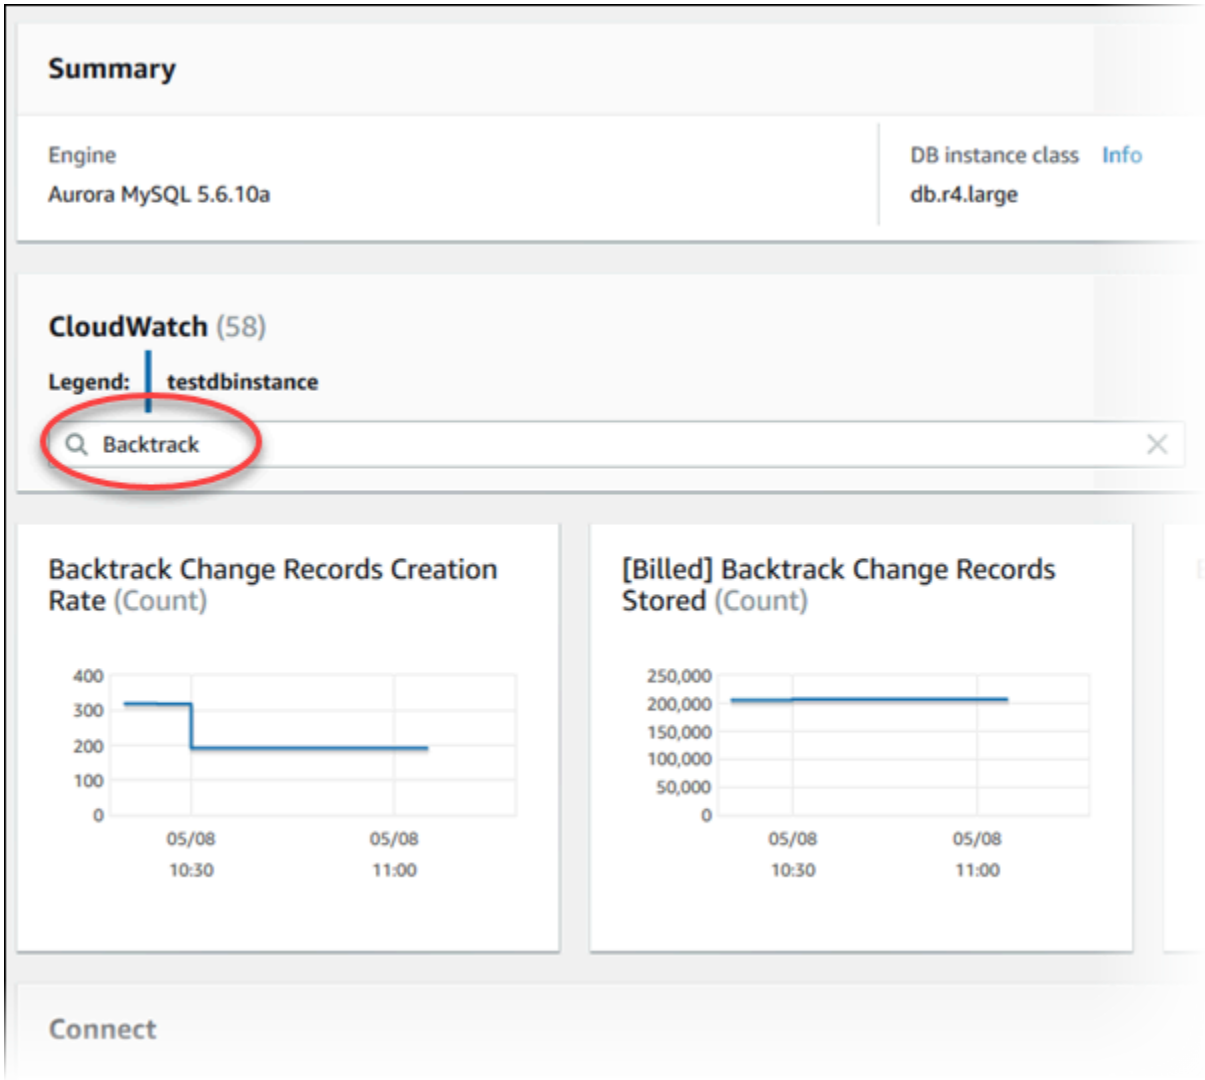

The following metrics are displayed:

- **Backtrack Change Records Creation Rate (Count)** – This metric shows the number of backtrack change records created over five minutes for your DB cluster. You can use this metric to estimate the backtrack cost for your target backtrack window.
- **[Billed] Backtrack Change Records Stored (Count)** – This metric shows the actual number of backtrack change records used by your DB cluster.
- **Backtrack Window Actual (Minutes)** – This metric shows whether there is a difference between the target backtrack window and the actual backtrack window. For example, if your target backtrack window is 2 hours (120 minutes), and this metric shows that the actual backtrack window is 100 minutes, then the actual backtrack window is smaller than the target.

- **Backtrack Window Alert (Count)** – This metric shows how often the actual backtrack window is smaller than the target backtrack window for a given period of time.

> **Note**
>
> The following metrics might lag behind the current time:
>
> - **Backtrack Change Records Creation Rate (Count)**
> - **[Billed] Backtrack Change Records Stored (Count)**

Amazon CLI

The following procedure describes how to view backtrack information for a DB cluster using the Amazon CLI.

To view backtrack information for a DB cluster using the Amazon CLI

- Call the describe-db-clusters Amazon CLI command and supply the following values:
  - `--db-cluster-identifier` – The name of the DB cluster.

  The following example lists backtrack information for `sample-cluster`.

  For Linux, macOS, or Unix:

```
aws rds describe-db-clusters \
    --db-cluster-identifier sample-cluster
```

  For Windows:

```
aws rds describe-db-clusters ^
    --db-cluster-identifier sample-cluster
```

RDS API

To view backtrack information for a DB cluster using the Amazon RDS API, use the DescribeDBClusters operation. This operation returns backtrack information for the DB cluster specified in the `DBClusterIdentifier` value.


Subscribing to a backtrack event with the console

The following procedure describes how to subscribe to a backtrack event using the console. The event sends you an email or text notification when your actual backtrack window is smaller than your target backtrack window.

To view backtrack information using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Event subscriptions**.
3. Choose **Create event subscription**.
4. In the **Name** box, type a name for the event subscription, and ensure that **Yes** is selected for **Enabled**.
5. In the **Target** section, choose **New email topic**.
6. For **Topic name**, type a name for the topic, and for **With these recipients**, enter the email addresses or phone numbers to receive the notifications.
7. In the **Source** section, choose **Instances** for **Source type**.
8. For **Instances to include**, choose **Select specific instances**, and choose your DB instance.
9. For **Event categories to include**, choose **Select specific event categories**, and choose **backtrack**.

   Your page should look similar to the following page.

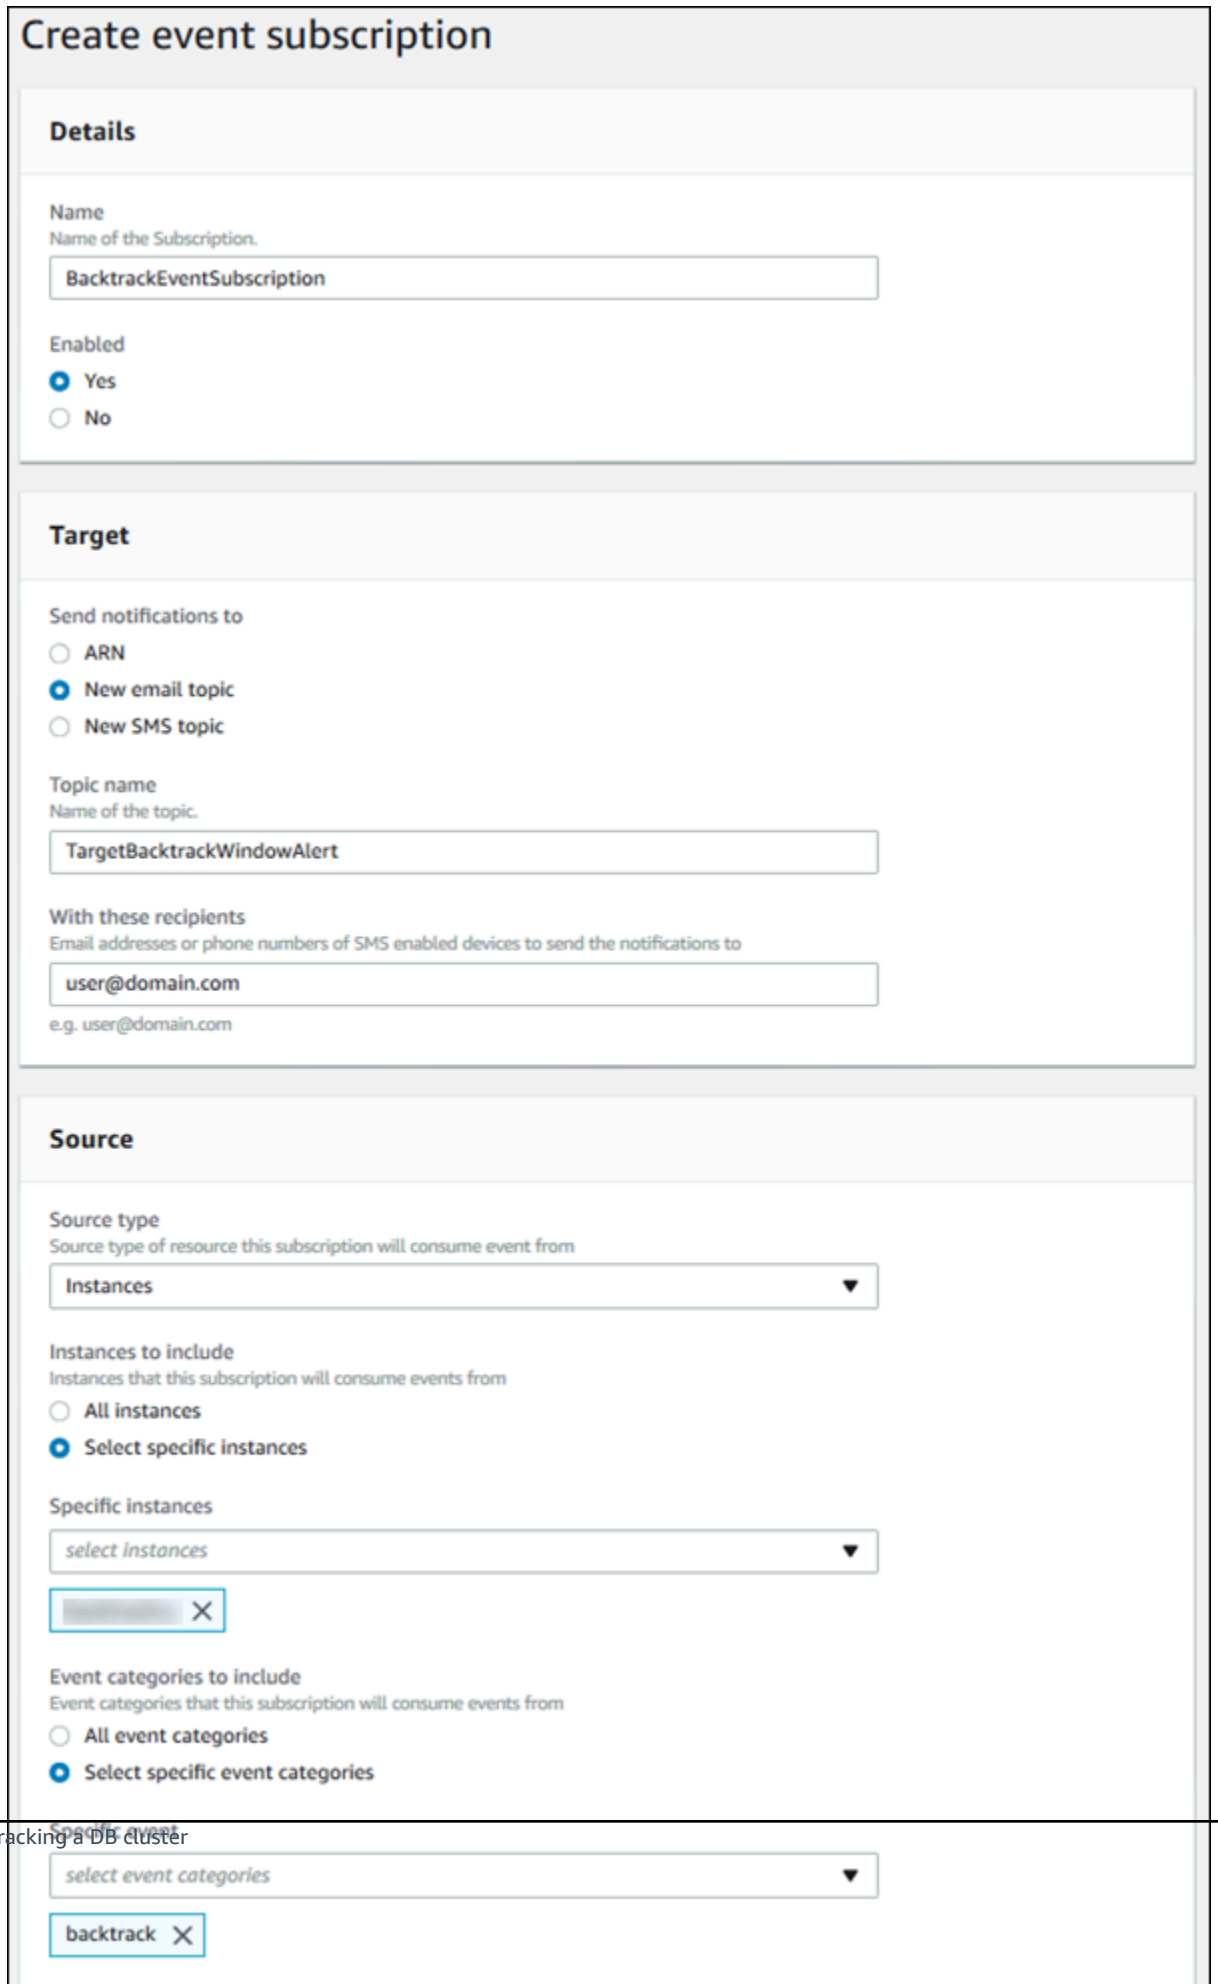
Create event subscription
Details
Name
Name of the Subscription.
BacktrackEventSubscription
Enabled
Yes
No
Target
Send notifications to
ARN
New email topic
New SMS topic
Topic name
Name of the topic.
TargetBacktrackWindowAlert
With these recipients
Email addresses or phone numbers of SMS enabled devices to send the notifications to
user@domain.com
e.g. user@domain.com
Source
Source type
Source type of resource this subscription will consume event from
Instances
Instances to include
Instances that this subscription will consume events from
All instances
Select specific instances
Specific instances
select instances
Event categories to include
Event categories that this subscription will consume events from
All event categories
Select specific event categories
select event categories
backtrack

10. Choose **Create**.

Retrieving existing backtracks

You can retrieve information about existing backtracks for a DB cluster. This information includes the unique identifier of the backtrack, the date and time backtracked to and from, the date and time the backtrack was requested, and the current status of the backtrack.

> **Note**
>
> Currently, you can't retrieve existing backtracks using the console.

Amazon CLI

The following procedure describes how to retrieve existing backtracks for a DB cluster using the Amazon CLI.

To retrieve existing backtracks using the Amazon CLI

- Call the describe-db-cluster-backtracks Amazon CLI command and supply the following values:
  - `--db-cluster-identifier` – The name of the DB cluster.

  The following example retrieves existing backtracks for `sample-cluster`.

  For Linux, macOS, or Unix:

```
aws rds describe-db-cluster-backtracks \
    --db-cluster-identifier sample-cluster
```

  For Windows:

```
aws rds describe-db-cluster-backtracks ^
    --db-cluster-identifier sample-cluster
```

RDS API

To retrieve information about the backtracks for a DB cluster using the Amazon RDS API, use the DescribeDBClusterBacktracks operation. This operation returns information about backtracks for the DB cluster specified in the `DBClusterIdentifier` value.

Disabling backtracking for an Aurora MySQL DB cluster

You can disable the Backtrack feature for a DB cluster.

Console

You can disable backtracking for a DB cluster using the console. After you turn off backtracking entirely for a cluster, you can't enable it again for that cluster.

To disable the Backtrack feature for a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose the cluster you want to modify, and choose **Modify**.
4. In the **Backtrack** section, choose **Disable Backtrack**.
5. Choose **Continue**.
6. For **Scheduling of Modifications**, choose one of the following:
   - **Apply during the next scheduled maintenance window** – Wait to apply the modification until the next maintenance window.
   - **Apply immediately** – Apply the modification as soon as possible.
7. Choose **Modify Cluster**.

Amazon CLI

You can disable the Backtrack feature for a DB cluster using the Amazon CLI by setting the target backtrack window to `0` (zero). After you turn off backtracking entirely for a cluster, you can't enable it again for that cluster.

To modify the target backtrack window for a DB cluster using the Amazon CLI

- Call the modify-db-cluster Amazon CLI command and supply the following values:

- `--db-cluster-identifier` – The name of the DB cluster.
- `--backtrack-window` – specify `0` to turn off backtracking.

The following example disables the Backtrack feature for the `sample-cluster` by setting `--backtrack-window` to `0`.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier sample-cluster \
    --backtrack-window 0
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier sample-cluster ^
    --backtrack-window 0
```

RDS API

To disable the Backtrack feature for a DB cluster using the Amazon RDS API, use the ModifyDBCluster operation. Set the `BacktrackWindow` value to `0` (zero), and specify the DB cluster in the `DBClusterIdentifier` value. After you turn off backtracking entirely for a cluster, you can't enable it again for that cluster.

Testing Amazon Aurora MySQL using fault injection queries

You can test the fault tolerance of your Aurora MySQL DB cluster by using fault injection queries. Fault injection queries are issued as SQL commands to an Amazon Aurora instance. They let you schedule a simulated occurrence of one of the following events:

- A crash of a writer or reader DB instance
- A failure of an Aurora Replica
- A disk failure
- Disk congestion

When a fault injection query specifies a crash, it forces a crash of the Aurora MySQL DB instance. The other fault injection queries result in simulations of failure events, but don't cause the event to occur. When you submit a fault injection query, you also specify an amount of time for the failure event simulation to occur for.

You can submit a fault injection query to one of your Aurora Replica instances by connecting to the endpoint for the Aurora Replica. For more information, see Amazon Aurora endpoint connections.

Running fault injection queries requires all of the master user privileges. For more information, see Master user account privileges.

Testing an instance crash

You can force a crash of an Amazon Aurora instance using the `ALTER SYSTEM CRASH` fault injection query.

For this fault injection query, a failover will not occur. If you want to test a failover, then you can choose the **Failover** instance action for your DB cluster in the RDS console, or use the failover-db-cluster Amazon CLI command or the FailoverDBCluster RDS API operation.

Syntax

```
ALTER SYSTEM CRASH [ INSTANCE | DISPATCHER | NODE ];
```

Options

This fault injection query takes one of the following crash types:

- **`INSTANCE`** — A crash of the MySQL-compatible database for the Amazon Aurora instance is simulated.
- **`DISPATCHER`** — A crash of the dispatcher on the writer instance for the Aurora DB cluster is simulated. The *dispatcher* writes updates to the cluster volume for an Amazon Aurora DB cluster.
- **`NODE`** — A crash of both the MySQL-compatible database and the dispatcher for the Amazon Aurora instance is simulated. For this fault injection simulation, the cache is also deleted.

The default crash type is `INSTANCE`.

Testing an Aurora replica failure

You can simulate the failure of an Aurora Replica using the `ALTER SYSTEM SIMULATE READ REPLICA FAILURE` fault injection query.

An Aurora Replica failure blocks all requests from the writer instance to an Aurora Replica or all Aurora Replicas in the DB cluster for a specified time interval. When the time interval completes, the affected Aurora Replicas will be automatically synced up with the writer instance.

Syntax

```
ALTER SYSTEM SIMULATE percentage_of_failure PERCENT READ REPLICA FAILURE
    [ TO ALL | TO "replica name" ]
    FOR INTERVAL quantity { YEAR | QUARTER | MONTH | WEEK | DAY | HOUR | MINUTE |
 SECOND };
```

Options

This fault injection query takes the following parameters:

- **`percentage_of_failure`** — The percentage of requests to block during the failure event. This value can be a double between 0 and 100. If you specify 0, then no requests are blocked. If you specify 100, then all requests are blocked.
- **Failure type** — The type of failure to simulate. Specify `TO ALL` to simulate failures for all Aurora Replicas in the DB cluster. Specify `TO` and the name of the Aurora Replica to simulate a failure of a single Aurora Replica. The default failure type is `TO ALL`.
- **`quantity`** — The amount of time for which to simulate the Aurora Replica failure. The interval is an amount followed by a time unit. The simulation will occur for that amount of the specified unit. For example, `20 MINUTE` will result in the simulation running for 20 minutes.

> **Note**
>
> Take care when specifying the time interval for your Aurora Replica failure event. If you specify too long of a time interval, and your writer instance writes a large amount of data during the failure event, then your Aurora DB cluster might assume that your Aurora Replica has crashed and replace it.

Testing a disk failure

You can simulate a disk failure for an Aurora DB cluster using the `ALTER SYSTEM SIMULATE DISK FAILURE` fault injection query.

During a disk failure simulation, the Aurora DB cluster randomly marks disk segments as faulting. Requests to those segments will be blocked for the duration of the simulation.

Syntax

```
ALTER SYSTEM SIMULATE percentage_of_failure PERCENT DISK FAILURE
    [ IN DISK index | NODE index ]
    FOR INTERVAL quantity { YEAR | QUARTER | MONTH | WEEK | DAY | HOUR | MINUTE |
 SECOND };
```

Options

This fault injection query takes the following parameters:

- **`percentage_of_failure`** — The percentage of the disk to mark as faulting during the failure event. This value can be a double between 0 and 100. If you specify 0, then none of the disk is marked as faulting. If you specify 100, then the entire disk is marked as faulting.
- **`DISK index`** — A specific logical block of data to simulate the failure event for. If you exceed the range of available logical blocks of data, you will receive an error that tells you the maximum index value that you can specify. For more information, see Displaying volume status for an Aurora MySQL DB cluster.
- **`NODE index`** — A specific storage node to simulate the failure event for. If you exceed the range of available storage nodes, you will receive an error that tells you the maximum index value that you can specify. For more information, see Displaying volume status for an Aurora MySQL DB cluster.
- **`quantity`** — The amount of time for which to simulate the disk failure. The interval is an amount followed by a time unit. The simulation will occur for that amount of the specified unit. For example, `20 MINUTE` will result in the simulation running for 20 minutes.

Testing disk congestion

You can simulate a disk failure for an Aurora DB cluster using the `ALTER SYSTEM SIMULATE DISK CONGESTION` fault injection query.

During a disk congestion simulation, the Aurora DB cluster randomly marks disk segments as congested. Requests to those segments will be delayed between the specified minimum and maximum delay time for the duration of the simulation.

Syntax

```
ALTER SYSTEM SIMULATE percentage_of_failure PERCENT DISK CONGESTION
    BETWEEN minimum AND maximum MILLISECONDS
    [ IN DISK index | NODE index ]
    FOR INTERVAL quantity { YEAR | QUARTER | MONTH | WEEK | DAY | HOUR | MINUTE |
 SECOND };
```

Options

This fault injection query takes the following parameters:

- **`percentage_of_failure`** — The percentage of the disk to mark as congested during the failure event. This value can be a double between 0 and 100. If you specify 0, then none of the disk is marked as congested. If you specify 100, then the entire disk is marked as congested.
- **`DISK index` Or `NODE index`** — A specific disk or node to simulate the failure event for. If you exceed the range of indexes for the disk or node, you will receive an error that tells you the maximum index value that you can specify.
- **`minimum` And `maximum`** — The minimum and maximum amount of congestion delay, in milliseconds. Disk segments marked as congested will be delayed for a random amount of time within the range of the minimum and maximum amount of milliseconds for the duration of the simulation.
- **`quantity`** — The amount of time for which to simulate the disk congestion. The interval is an amount followed by a time unit. The simulation will occur for that amount of the specified time unit. For example, `20 MINUTE` will result in the simulation running for 20 minutes.

Altering tables in Amazon Aurora using Fast DDL

Amazon Aurora includes optimizations to run an `ALTER TABLE` operation in place, nearly instantaneously. The operation completes without requiring the table to be copied and without having a material impact on other DML statements. Because the operation doesn't consume temporary storage for a table copy, it makes DDL statements practical even for large tables on small instance classes.

Aurora MySQL version 3 is compatible with the MySQL 8.0 feature called instant DDL. Aurora MySQL version 2 uses a different implementation called Fast DDL.

Topics

- Instant DDL (Aurora MySQL version 3 and version 8.4)
- Fast DDL (Aurora MySQL version 2)

Instant DDL (Aurora MySQL version 3 and version 8.4)

The optimization performed by Aurora MySQL version 3 and version 8.4 to improve the efficiency of some DDL operations is called instant DDL.

Aurora MySQL version 3 is compatible with the instant DDL from community MySQL 8.0. You perform an instant DDL operation by using the clause `ALGORITHM=INSTANT` with the `ALTER TABLE` statement. For syntax and usage details about instant DDL, see ALTER TABLE and Online DDL Operations in the MySQL documentation.

The following examples demonstrate the instant DDL feature. The `ALTER TABLE` statements add columns and change default column values. The examples include both regular and virtual columns, and both regular and partitioned tables. At each step, you can see the results by issuing `SHOW CREATE TABLE` and `DESCRIBE` statements.

```
mysql> CREATE TABLE t1 (a INT, b INT, KEY(b)) PARTITION BY KEY(b) PARTITIONS 6;
Query OK, 0 rows affected (0.02 sec)

mysql> ALTER TABLE t1 RENAME TO t2, ALGORITHM = INSTANT;
Query OK, 0 rows affected (0.01 sec)

mysql> ALTER TABLE t2 ALTER COLUMN b SET DEFAULT 100, ALGORITHM = INSTANT;
Query OK, 0 rows affected (0.00 sec)

mysql> ALTER TABLE t2 ALTER COLUMN b DROP DEFAULT, ALGORITHM = INSTANT;
Query OK, 0 rows affected (0.01 sec)

mysql> ALTER TABLE t2 ADD COLUMN c ENUM('a', 'b', 'c'), ALGORITHM = INSTANT;
Query OK, 0 rows affected (0.01 sec)

mysql> ALTER TABLE t2 MODIFY COLUMN c ENUM('a', 'b', 'c', 'd', 'e'), ALGORITHM =
 INSTANT;
Query OK, 0 rows affected (0.01 sec)
```

```
mysql> ALTER TABLE t2 ADD COLUMN (d INT GENERATED ALWAYS AS (a + 1) VIRTUAL), ALGORITHM
 = INSTANT;
Query OK, 0 rows affected (0.02 sec)

mysql> ALTER TABLE t2 ALTER COLUMN a SET DEFAULT 20,
    ->   ALTER COLUMN b SET DEFAULT 200, ALGORITHM = INSTANT;
Query OK, 0 rows affected (0.01 sec)

mysql> CREATE TABLE t3 (a INT, b INT) PARTITION BY LIST(a)(
    ->   PARTITION mypart1 VALUES IN (1,3,5),
    ->   PARTITION MyPart2 VALUES IN (2,4,6)
    -> );
Query OK, 0 rows affected (0.03 sec)

mysql> ALTER TABLE t3 ALTER COLUMN a SET DEFAULT 20, ALTER COLUMN b SET DEFAULT 200,
 ALGORITHM = INSTANT;
Query OK, 0 rows affected (0.01 sec)

mysql> CREATE TABLE t4 (a INT, b INT) PARTITION BY RANGE(a)
    ->   (PARTITION p0 VALUES LESS THAN(100), PARTITION p1 VALUES LESS THAN(1000),
    ->   PARTITION p2 VALUES LESS THAN MAXVALUE);
Query OK, 0 rows affected (0.05 sec)

mysql> ALTER TABLE t4 ALTER COLUMN a SET DEFAULT 20,
    ->   ALTER COLUMN b SET DEFAULT 200, ALGORITHM = INSTANT;
Query OK, 0 rows affected (0.01 sec)

/* Sub-partitioning example */
mysql> CREATE TABLE ts (id INT, purchased DATE, a INT, b INT)
    ->   PARTITION BY RANGE( YEAR(purchased) )
    ->     SUBPARTITION BY HASH( TO_DAYS(purchased) )
    ->     SUBPARTITIONS 2 (
    ->       PARTITION p0 VALUES LESS THAN (1990),
    ->       PARTITION p1 VALUES LESS THAN (2000),
    ->       PARTITION p2 VALUES LESS THAN MAXVALUE
    ->    );
Query OK, 0 rows affected (0.10 sec)

mysql> ALTER TABLE ts ALTER COLUMN a SET DEFAULT 20,
    ->   ALTER COLUMN b SET DEFAULT 200, ALGORITHM = INSTANT;
Query OK, 0 rows affected (0.01 sec)
```

Fast DDL (Aurora MySQL version 2)

Fast DDL in Aurora MySQL is an optimization designed to improve the performance of certain schema changes, such as adding or dropping columns, by reducing downtime and resource usage. It allows these operations to be completed more efficiently compared to traditional DDL methods.

> **Important**
>
> Currently, you must enable Aurora lab mode to use Fast DDL. For information about enabling lab mode, see Amazon Aurora MySQL lab mode.
> The Fast DDL optimization was initially introduced in lab mode on Aurora MySQL version 2 to enhance the efficiency of certain DDL operations. In Aurora MySQL version 3, lab mode has been discontinued, and Fast DDL has been replaced by the MySQL 8.0 Instant DDL feature.

In MySQL, many data definition language (DDL) operations have a significant performance impact.

For example, suppose that you use an `ALTER TABLE` operation to add a column to a table. Depending on the algorithm specified for the operation, this operation can involve the following:

- Creating a full copy of the table
- Creating a temporary table to process concurrent data manipulation language (DML) operations
- Rebuilding all indexes for the table
- Applying table locks while applying concurrent DML changes
- Slowing concurrent DML throughput

This performance impact can be particularly challenging in environments with large tables or high transaction volumes. Fast DDL helps mitigate these challenges by optimizing schema changes, which enables quicker and less resource-intensive operations.

Fast DDL limitations

Currently, Fast DDL has the following limitations:

- Fast DDL only supports adding nullable columns, without default values, to the end of an existing table.
- Fast DDL doesn't work for partitioned tables.
- Fast DDL doesn't work for InnoDB tables that use the REDUNDANT row format.

- Fast DDL doesn't work for tables with full-text search indexes.
- If the maximum possible record size for the DDL operation is too large, Fast DDL is not used. A record size is too large if it is greater than half the page size. The maximum size of a record is computed by adding the maximum sizes of all columns. For variable sized columns, according to InnoDB standards, extern bytes are not included for computation.

Fast DDL syntax

```
ALTER TABLE tbl_name ADD COLUMN col_name column_definition
```

This statement takes the following options:

- **`tbl_name`** — The name of the table to be modified.
- **`col_name`** — The name of the column to be added.
- **`col_definition`** — The definition of the column to be added.

> **Note**
>
> You must specify a nullable column definition without a default value. Otherwise, Fast DDL isn't used.

Fast DDL examples

The following examples demonstrate the speedup from Fast DDL operations. The first SQL example runs `ALTER TABLE` statements on a large table without using Fast DDL. This operation takes substantial time. A CLI example shows how to enable Fast DDL for the cluster. Then another SQL example runs the same `ALTER TABLE` statements on an identical table. With Fast DDL enabled, the operation is very fast.

This example uses the `ORDERS` table from the TPC-H benchmark, containing 150 million rows. This cluster intentionally uses a relatively small instance class, to demonstrate how long `ALTER TABLE` statements can take when you can't use Fast DDL. The example creates a clone of the original table containing identical data. Checking the `aurora_lab_mode` setting confirms that the cluster can't use Fast DDL, because lab mode isn't enabled. Then `ALTER TABLE ADD COLUMN` statements take substantial time to add new columns at the end of the table.

```
mysql> create table orders_regular_ddl like orders;
```

```
Query OK, 0 rows affected (0.06 sec)

mysql> insert into orders_regular_ddl select * from orders;
Query OK, 150000000 rows affected (1 hour 1 min 25.46 sec)

mysql> select @@aurora_lab_mode;
+------------------+
| @@aurora_lab_mode |
+------------------+
|                0 |
+------------------+

mysql> ALTER TABLE orders_regular_ddl ADD COLUMN o_refunded boolean;
Query OK, 0 rows affected (40 min 31.41 sec)

mysql> ALTER TABLE orders_regular_ddl ADD COLUMN o_coverletter varchar(512);
Query OK, 0 rows affected (40 min 44.45 sec)
```

This example does the same preparation of a large table as the previous example. However, you can't simply enable lab mode within an interactive SQL session. That setting must be enabled in a custom parameter group. Doing so requires switching out of the `mysql` session and running some Amazon CLI commands or using the Amazon Web Services Management Console.

```
mysql> create table orders_fast_ddl like orders;
Query OK, 0 rows affected (0.02 sec)

mysql> insert into orders_fast_ddl select * from orders;
Query OK, 150000000 rows affected (58 min 3.25 sec)

mysql> set aurora_lab_mode=1;
ERROR 1238 (HY000): Variable 'aurora_lab_mode' is a read only variable
```

Enabling lab mode for the cluster requires some work with a parameter group. This Amazon CLI example uses a cluster parameter group, to ensure that all DB instances in the cluster use the same value for the lab mode setting.

```
$ aws rds create-db-cluster-parameter-group \
  --db-parameter-group-family aurora5.7 \
    --db-cluster-parameter-group-name lab-mode-enabled-57 --description 'TBD'
$ aws rds describe-db-cluster-parameters \
  --db-cluster-parameter-group-name lab-mode-enabled-57 \
    --query '*[*].[ParameterName,ParameterValue]' \
```

```
      --output text | grep aurora_lab_mode
aurora_lab_mode 0
$ aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name lab-mode-enabled-57 \
    --parameters ParameterName=aurora_lab_mode,ParameterValue=1,ApplyMethod=pending-
reboot
{
    "DBClusterParameterGroupName": "lab-mode-enabled-57"
}

# Assign the custom parameter group to the cluster that's going to use Fast DDL.
$ aws rds modify-db-cluster --db-cluster-identifier tpch100g \
  --db-cluster-parameter-group-name lab-mode-enabled-57
{
  "DBClusterIdentifier": "tpch100g",
  "DBClusterParameterGroup": "lab-mode-enabled-57",
  "Engine": "aurora-mysql",
  "EngineVersion": "5.7.mysql_aurora.2.10.2",
  "Status": "available"
}

# Reboot the primary instance for the cluster tpch100g:
$ aws rds reboot-db-instance --db-instance-identifier instance-2020-12-22-5208
{
  "DBInstanceIdentifier": "instance-2020-12-22-5208",
  "DBInstanceStatus": "rebooting"
}

$ aws rds describe-db-clusters --db-cluster-identifier tpch100g \
  --query '*[].[DBClusterParameterGroup]' --output text
lab-mode-enabled-57

$ aws rds describe-db-cluster-parameters \
  --db-cluster-parameter-group-name lab-mode-enabled-57 \
    --query '*[*].{ParameterName:ParameterName,ParameterValue:ParameterValue}' \
      --output text | grep aurora_lab_mode
aurora_lab_mode 1
```

The following example shows the remaining steps after the parameter group change takes effect. It tests the `aurora_lab_mode` setting to make sure that the cluster can use Fast DDL. Then it runs `ALTER TABLE` statements to add columns to the end of another large table. This time, the statements finish very quickly.

```
mysql> select @@aurora_lab_mode;
+-------------------+
| @@aurora_lab_mode |
+-------------------+
|                 1 |
+-------------------+

mysql> ALTER TABLE orders_fast_ddl ADD COLUMN o_refunded boolean;
Query OK, 0 rows affected (1.51 sec)

mysql> ALTER TABLE orders_fast_ddl ADD COLUMN o_coverletter varchar(512);
Query OK, 0 rows affected (0.40 sec)
```

Displaying volume status for an Aurora MySQL DB cluster

In Amazon Aurora, a DB cluster volume consists of a collection of logical blocks. Each of these represents 10 gigabytes of allocated storage. These blocks are called *protection groups*.

The data in each protection group is replicated across six physical storage devices, called *storage nodes*. These storage nodes are allocated across three Availability Zones (AZs) in the Amazon Region where the DB cluster resides. In turn, each storage node contains one or more logical blocks of data for the DB cluster volume. For more information about protection groups and storage nodes, see Introducing the Aurora storage engine on the Amazon Database Blog.

You can simulate the failure of an entire storage node, or a single logical block of data within a storage node. To do so, you use the `ALTER SYSTEM SIMULATE DISK FAILURE` fault injection statement. For the statement, you specify the index value of a specific logical block of data or storage node. However, if you specify an index value greater than the number of logical blocks of data or storage nodes used by the DB cluster volume, the statement returns an error. For more information about fault injection queries, see Testing Amazon Aurora MySQL using fault injection queries.

You can avoid that error by using the `SHOW VOLUME STATUS` statement. The statement returns two server status variables, `Disks` and `Nodes`. These variables represent the total number of logical blocks of data and storage nodes, respectively, for the DB cluster volume.

Syntax

```
SHOW VOLUME STATUS
```

Example

The following example illustrates a typical SHOW VOLUME STATUS result.

```
mysql> SHOW VOLUME STATUS;
+---------------+-------+
| Variable_name | Value |
+---------------+-------+
| Disks         | 96    |
| Nodes         | 74    |
+---------------+-------+
```

Transaction timeout in Amazon Aurora MySQL

The `aurora_transaction_timeout` parameter sets the maximum duration for a transaction. This parameter can help prevent long-running transactions (active or idle) from blocking InnoDB purge, which can lead to performance issues. This parameter is available in Aurora MySQL version 8.4.8 and higher.

Topics

- Parameter details
- Timeout behavior
- Examples
- Key notes
- Client error
- Error log
- Monitoring transaction timeouts
- Interaction with other timeouts

Parameter details

The `aurora_transaction_timeout` parameter terminates any InnoDB transaction that spans longer than the specified duration, including read-only transactions. You specify the value in seconds. A value of zero (the default) disables the timeout.

The following table summarizes the parameter details.

Property	Value
Name	`aurora_transaction_timeout`
Scope	Session, Global
Default	0 (disabled)
Unit	Seconds
Dynamic	Yes, applies to new InnoDB transactions only

You can set the `aurora_transaction_timeout` parameter at the cluster, instance, or session level. For more information about working with parameter groups, see Parameter groups for Amazon Aurora.

Timeout behavior

The `aurora_transaction_timeout` parameter applies to InnoDB transactions that execute DML statements, including read-only transactions. All implicit commit statements, except `CREATE TABLE .. AS SELECT` (CTAS) and `LOAD DATA`, are excluded from the timeout. The timeout value is captured when the first InnoDB statement runs. The value remains fixed for the lifetime of that transaction.

When the timeout expires, the outcome depends on the transaction state:

- If there is an active query in the transaction, the query is interrupted and the transaction is rolled back. The connection remains usable.
- If there is no active query (that is, the transaction is idle), the connection is terminated.

Examples

The following examples show when the timer starts for different transaction scenarios.

Explicit transaction

```
BEGIN;                    -- Does NOT start InnoDB transaction. No timer.
SELECT * FROM t1;         -- Starts InnoDB transaction. Timer starts HERE (at statement
 2).
```

The timer starts at statement 2 (the first InnoDB statement).

autocommit=0

```
SET SESSION autocommit=0;  -- No transaction yet
SELECT * FROM t1;          -- Starts InnoDB transaction. Timer starts HERE.
INSERT INTO t1 ...;        -- Same transaction, timer still running from step 2.
```

The timer starts at statement 2 (the first InnoDB statement after autocommit is disabled).

Stored procedures

A stored procedure runs within the caller's transaction context. If the caller already has an active InnoDB transaction, the timer was already started before the procedure call. If the procedure is the first thing to touch InnoDB, the timer starts at the first InnoDB statement inside the procedure.

```
BEGIN;
CALL my_proc();  -- If my_proc() does SELECT/INSERT, timer starts at that first InnoDB
 statement inside the proc
```

Key notes

- **Timeout is captured at transaction start** – The timeout value is captured when the first InnoDB statement executes. Changing `aurora_transaction_timeout` in the middle of a transaction takes effect on the next transaction, not the current one. No warning is raised.
- **XA PREPARED transactions are excluded** – Prepared transactions are not subject to `aurora_transaction_timeout`.
- **Write forwarding sessions are not subject to transaction timeout** – When write forwarding is enabled, any statement or transaction that contains a forwarded statement is not subject to `aurora_transaction_timeout`. Subsequent transactions on the same session that do not include forwarded statements are subject to timeout as normal. To control idle timeout for forwarded transactions, you can use the `aurora_fwd_writer_idle_timeout` parameter. For more information, see Configuration parameters for write forwarding in Aurora MySQL.
- **Use caution with high timeout values** – When a long-running transaction is rolled back, the rollback can take several times longer than the original data change operations. Killing the database process does not help because the rollback restarts on server startup. Choose a timeout value that balances your workload needs against rollback cost. For more information, see Optimizing InnoDB Transaction Management in the MySQL documentation.

Client error

When a transaction with an active query exceeds the timeout, the client receives the following error:

```
ERROR 63952 (40001): Transaction exceeded maximum allowed duration of <N> seconds and
 was rolled back. See aurora_transaction_timeout for configuring this behavior.
```

When an idle transaction exceeds the timeout, the subsequent query receives the same error as the MySQL "server gone away" error. For more information, see MySQL server has gone away in the MySQL documentation.

Error log

An informational message is written to the database error log when a transaction timeout occurs:

```
[Note] Transaction breached timeout threshold and will be rolled back, if still in
 progress. If idle, the connection will be aborted. Check response for confirmation.
 connection_id: 4821, trx_id: 28193, user: app_user, timeout: 5 seconds, duration: 7
 seconds
```

> **Note**
>
> This log message is for diagnostic purposes only. Rely on the client response as the definitive indicator of a timed-out transaction.

Monitoring transaction timeouts

Use the `Aurora_transaction_timeouts` status variable to track how many transactions have timed out since the DB instance restarted.

```
SHOW GLOBAL STATUS LIKE 'Aurora_transaction_timeouts';
```

When `performance_schema` is enabled, the timeout error (`ER_AURORA_TRANSACTION_TIMEOUT_ERROR`) is also tracked in `performance_schema.events_errors_summary_global_by_error` and related tables. Note that only active transaction timeouts increment this counter; idle transaction timeouts terminate the connection without raising the `ER_AURORA_TRANSACTION_TIMEOUT_ERROR` error.

Interaction with other timeouts

The `aurora_transaction_timeout` works alongside existing timeout parameters. If a transaction remains open longer than the configured `aurora_transaction_timeout`, it is terminated regardless of other timeout settings. Whether other timeouts also roll back the transaction depends on their own implementation. For details on these parameters, see the MySQL documentation.

Tuning Aurora MySQL

Wait events and thread states are important tuning tools for Aurora MySQL. If you can find out why sessions are waiting for resources and what they are doing, you are better able to reduce bottlenecks. You can use the information in this section to find possible causes and corrective actions.

Amazon DevOps Guru for RDS can proactively determine whether your Aurora MySQL databases are experiencing problematic conditions that might cause bigger problems later. Amazon DevOps Guru for RDS publishes an explanation and recommendations for corrective actions in a proactive insight. This section contains insights for common problems.

> **Important**
>
> The wait events and thread states in this section are specific to Aurora MySQL. Use the information in this section to tune only Amazon Aurora, not Amazon RDS for MySQL. Some wait events in this section have no analogs in the open source versions of these database engines. Other wait events have the same names as events in open source engines, but behave differently. For example, Amazon Aurora storage works different from open source storage, so storage-related wait events indicate different resource conditions.

Topics

- Essential concepts for Aurora MySQL tuning
- Tuning Aurora MySQL with wait events
- Tuning Aurora MySQL with thread states
- Tuning Aurora MySQL with Amazon DevOps Guru proactive insights

Essential concepts for Aurora MySQL tuning

Before you tune your Aurora MySQL database, make sure to learn what wait events and thread states are and why they occur. Also review the basic memory and disk architecture of Aurora MySQL when using the InnoDB storage engine. For a helpful architecture diagram, see the MySQL Reference Manual.

Topics

- Aurora MySQL wait events
- Aurora MySQL thread states
- Aurora MySQL memory
- Aurora MySQL processes

Aurora MySQL wait events

A *wait event* indicates a resource for which a session is waiting. For example, the wait event `io/socket/sql/client_connection` indicates that a thread is in the process of handling a new connection. Typical resources that a session waits for include the following:

- Single-threaded access to a buffer, for example, when a session is attempting to modify a buffer
- A row that is currently locked by another session
- A data file read
- A log file write

For example, to satisfy a query, the session might perform a full table scan. If the data isn't already in memory, the session waits for the disk I/O to complete. When the buffers are read into memory, the session might need to wait because other sessions are accessing the same buffers. The database records the waits by using a predefined wait event. These events are grouped into categories.

A wait event doesn't by itself show a performance problem. For example, if requested data isn't in memory, reading data from disk is necessary. If one session locks a row for an update, another session waits for the row to be unlocked so that it can update it. A commit requires waiting for the write to a log file to complete. Waits are integral to the normal functioning of a database.

Large numbers of wait events typically show a performance problem. In such cases, you can use wait event data to determine where sessions are spending time. For example, if a report that typically runs in minutes now runs for hours, you can identify the wait events that contribute the most to total wait time. If you can determine the causes of the top wait events, you can sometimes make changes that improve performance. For example, if your session is waiting on a row that has been locked by another session, you can end the locking session.

Aurora MySQL thread states

A *general thread state* is a `State` value that is associated with general query processing. For example, the thread state `sending data` indicates that a thread is reading and filtering rows for a query to determine the correct result set.

You can use thread states to tune Aurora MySQL in a similar fashion to how you use wait events. For example, frequent occurrences of `sending data` usually indicate that a query isn't using an index. For more information about thread states, see General Thread States in the *MySQL Reference Manual*.

When you use Performance Insights, one of the following conditions is true:

- Performance Schema is turned on – Aurora MySQL shows wait events rather than the thread state.
- Performance Schema isn't turned on – Aurora MySQL shows the thread state.

We recommend that you configure the Performance Schema for automatic management. The Performance Schema provides additional insights and better tools to investigate potential performance problems. For more information, see Overview of the Performance Schema for Database Insights in Aurora MySQL.

Aurora MySQL memory

In Aurora MySQL, the most important memory areas are the buffer pool and log buffer.

Topics

- Buffer pool

Buffer pool

The *buffer pool* is the shared memory area where Aurora MySQL caches table and index data. Queries can access frequently used data directly from memory without reading from disk.

The buffer pool is structured as a linked list of pages. A *page* can hold multiple rows. Aurora MySQL uses a least recently used (LRU) algorithm to age pages out of the pool.

For more information, see Buffer Pool in the *MySQL Reference Manual*.

Aurora MySQL processes

Aurora MySQL uses a process model that is very different from Aurora PostgreSQL.

Topics

- MySQL server (mysqld)
- Threads
- Thread pool

MySQL server (mysqld)

The MySQL server is a single operating-system process named mysqld. The MySQL server doesn't spawn additional processes. Thus, an Aurora MySQL database uses mysqld to perform most of its work.

When the MySQL server starts, it listens for network connections from MySQL clients. When a client connects to the database, mysqld opens a thread.

Threads

Connection manager threads associate each client connection with a dedicated thread. This thread manages authentication, runs statements, and returns results to the client. Connection manager creates new threads when necessary.

The *thread cache* is the set of available threads. When a connection ends, MySQL returns the thread to the thread cache if the cache isn't full. The `thread_cache_size` system variable determines the thread cache size.

Thread pool

The *thread pool* consists of a number of thread groups. Each group manages a set of client connections. When a client connects to the database, the thread pool assigns the connections to thread groups in round-robin fashion. The thread pool separates connections and threads. There is no fixed relationship between connections and the threads that run statements received from those connections.

Tuning Aurora MySQL with wait events

The following table summarizes the Aurora MySQL wait events that most commonly indicate performance problems. The following wait events are a subset of the list in Aurora MySQL wait events.

Wait event	Description
cpu	This event occurs when a thread is active in CPU or is waiting for CPU.
io/aurora_redo_log_flush	This event occurs when a session is writing persistent data to Aurora storage.
io/aurora_respond_to_client	This event occurs when a thread is waiting to return a result set to a client.
io/redo_log_flush	This event occurs when a session is writing persistent data to Aurora storage.
io/socket/sql/client_connection	This event occurs when a thread is in the process of handling a new connection.
io/table/sql/handler	This event occurs when work has been delegated to a storage engine.
synch/cond/innodb/row_lock_wait	This event occurs when one session has locked a row for an update, and another session tries to update the same row.
synch/cond/innodb/row_lock_wait_cond	This event occurs when one session has locked a row for an update, and another session tries to update the same row.
synch/cond/sql/MDL_context::COND_wait_status	This event occurs when there are threads waiting on a table metadata lock.

Wait event	Description
synch/mutex/innodb/aurora_lock_thread_slot_futex	This event occurs when one session has locked a row for an update, and another session tries to update the same row.
synch/mutex/innodb/buf_pool_mutex	This event occurs when a thread has acquired a lock on the InnoDB buffer pool to access a page in memory.
synch/mutex/innodb/fil_system_mutex	This event occurs when a session is waiting to access the tablespace memory cache.
synch/mutex/innodb/trx_sys_mutex	This event occurs when there is high database activity with a large number of transactions.
synch/sxlock/innodb/hash_table_locks	This event occurs when pages not found in the buffer pool must be read from a file.
synch/mutex/innodb/temp_pool_manager_mutex	This event occurs when a session is waiting to acquire a mutex for managing the pool of session temporary tablespaces.

cpu

The cpu wait event occurs when a thread is active in CPU or is waiting for CPU.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL versions 2 and 3

Context

For every vCPU, a connection can run work on this CPU. In some situations, the number of active connections that are ready to run is higher than the number of vCPUs. This imbalance results in connections waiting for CPU resources. If the number of active connections stays consistently higher than the number of vCPUs, then your instance experiences CPU contention. The contention causes the `cpu` wait event to occur.

> **Note**
>
> The database metric for CPU is `DBLoadCPU`, which is exposed through the Performance Insights API. The value for `DBLoadCPU` can differ from the value for the CloudWatch metric `CPUUtilization`. The latter metric is collected from the HyperVisor for a database instance.

The database counter metrics include OS metrics that provide information about CPU utilization. For example, you can display the following metrics:

- `os.cpuUtilization.nice.avg`
- `os.cpuUtilization.total.avg`
- `os.cpuUtilization.wait.avg`
- `os.cpuUtilization.idle.avg`

Performance Insights reports the CPU usage by the database engine as `os.cpuUtilization.nice.avg`.

Likely causes of increased waits

When this event occurs more than normal, possibly indicating a performance problem, typical causes include the following:

- Analytic queries
- Highly concurrent transactions
- Long-running transactions
- A sudden increase in the number of connections, known as a *login storm*

- An increase in context switching

Actions

If the cpu wait event dominates database activity, it doesn't necessarily indicate a performance problem. Respond to this event only when performance degrades.

Depending on the cause of the increase in CPU utilization, consider the following strategies:

- Increase the CPU capacity of the host. This approach typically gives only temporary relief.
- Identify top queries for potential optimization.
- Redirect some read-only workload to reader nodes, if applicable.

Topics

- Identify the sessions or queries that are causing the problem
- Analyze and optimize the high CPU workload

Identify the sessions or queries that are causing the problem

To find the sessions and queries, look at the **Top SQL** table in Performance Insights for the SQL statements that have the highest CPU load. For more information, see Database Insights.

Typically, one or two SQL statements consume the majority of CPU cycles. Concentrate your efforts on these statements. Suppose that your DB instance has 2 vCPUs with a DB load of 3.1 average active sessions (AAS), all in the CPU state. In this case, your instance is CPU bound. Consider the following strategies:

- Upgrade to a larger instance class with more vCPUs.
- Tune your queries to have lower CPU load.

In this example, the top SQL queries have a DB load of 1.5 AAS, all in the CPU state. Another SQL statement has a load of 0.1 in the CPU state. In this example, if you stopped the lowest-load SQL statement, you don't significantly reduce database load. However, if you optimize the two high-load queries to be twice as efficient, you eliminate the CPU bottleneck. If you reduce the CPU load of 1.5 AAS by 50 percent, the AAS for each statement decreases to 0.75. The total DB load spent on CPU is now 1.6 AAS. This value is below the maximum vCPU line of 2.0.

For a useful overview of troubleshooting using Performance Insights, see the blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights. Also see the Amazon Support article How can I troubleshoot and resolve high CPU utilization on my Amazon RDS for MySQL instances?.

Analyze and optimize the high CPU workload

After you identify the query or queries increasing CPU usage, you can either optimize them or end the connection. The following example shows how to end a connection.

```
CALL mysql.rds_kill(processID);
```

For more information, see mysql.rds_kill.

If you end a session, the action might trigger a long rollback.

Follow the guidelines for optimizing queries

To optimize queries, consider the following guidelines:

- Run the `EXPLAIN` statement.

  This command shows the individual steps involved in running a query. For more information, see Optimizing Queries with EXPLAIN in the MySQL documentation.
- Run the `SHOW PROFILE` statement.

  Use this statement to review profile details that can indicate resource usage for statements that are run during the current session. For more information, see SHOW PROFILE Statement in the MySQL documentation.
- Run the `ANALYZE TABLE` statement.

  Use this statement to refresh the index statistics for the tables accessed by the high-CPU consuming query. By analyzing the statement, you can help the optimizer choose an appropriate execution plan. For more information, see ANALYZE TABLE Statement in the MySQL documentation.

Follow the guidelines for improving CPU usage

To improve CPU usage in a database instance, follow these guidelines:

- Ensure that all queries are using proper indexes.

- Find out whether you can use Aurora parallel queries. You can use this technique to reduce CPU usage on the head node by pushing down function processing, row filtering, and column projection for the `WHERE` clause.
- Find out whether the number of SQL executions per second meets the expected thresholds.
- Find out whether index maintenance or new index creation takes up CPU cycles needed by your production workload. Schedule maintenance activities outside of peak activity times.
- Find out whether you can use partitioning to help reduce the query data set. For more information, see the blog post How to plan and optimize Amazon Aurora with MySQL compatibility for consolidated workloads.

Check for connection storms

If the `DBLoadCPU` metric is not very high, but the `CPUUtilization` metric is high, the cause of the high CPU utilization lies outside of the database engine. A classic example is a connection storm.

Check whether the following conditions are true:

- There is an increase in both the `CPUUtilization` metric and the Amazon CloudWatch `DatabaseConnections` metric.
- The number of threads in the CPU is greater than the number of vCPUs.

If the preceding conditions are true, consider decreasing the number of database connections. For example, you can use a connection pool such as RDS Proxy. To learn the best practices for effective connection management and scaling, see the whitepaper Amazon Aurora MySQL DBA Handbook for Connection Management.

io/aurora_redo_log_flush

The `io/aurora_redo_log_flush` event occurs when a session is writing persistent data to Amazon Aurora storage.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL version 2

Context

The `io/aurora_redo_log_flush` event is for a write input/output (I/O) operation in Aurora MySQL.


> **Note**
>
> In Aurora MySQL version 3, this wait event is named io/redo_log_flush.

Likely causes of increased waits


For data persistence, commits require a durable write to stable storage. If the database is doing too many commits, there is a wait event on the write I/O operation, the `io/aurora_redo_log_flush` wait event.

In the following examples, 50,000 records are inserted into an Aurora MySQL DB cluster using the db.r5.xlarge DB instance class:

- In the first example, each session inserts 10,000 records row by row. By default, if a data manipulation language (DML) command isn't within a transaction, Aurora MySQL uses implicit commits. Autocommit is turned on. This means that for each row insertion there is a commit. Performance Insights shows that the connections spend most of their time waiting on the `io/aurora_redo_log_flush` wait event.

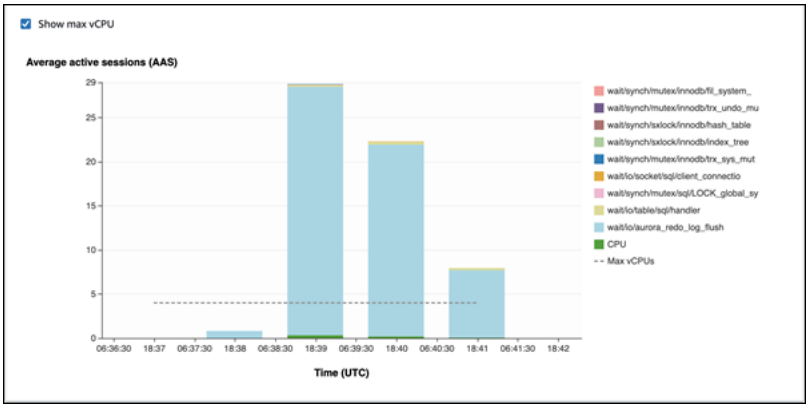


This is caused by the simple insert statements used.

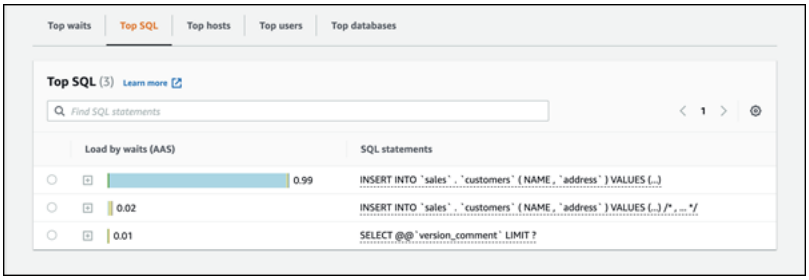

The 50,000 records take 3.5 minutes to be inserted.

- In the second example, inserts are made in 1,000 batches, that is each connection performs 10 commits instead of 10,000. Performance Insights shows that the connections don't spend most of their time on the `io/aurora_redo_log_flush` wait event.

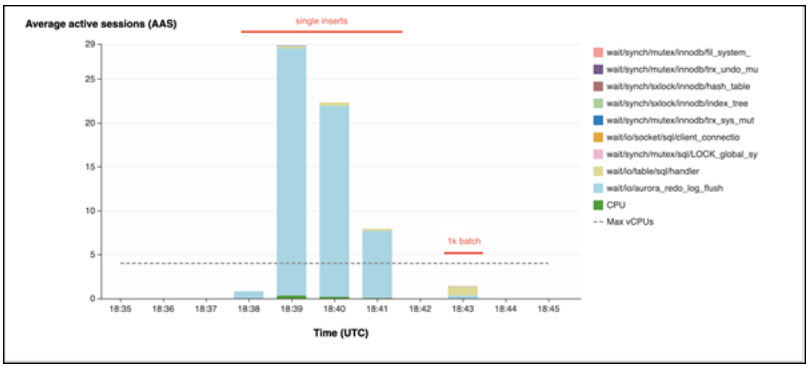

The 50,000 records take 4 seconds to be inserted.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Identify the problematic sessions and queries
- Group your write operations
- Turn off autocommit
- Use transactions
- Use batches

Identify the problematic sessions and queries

If your DB instance is experiencing a bottleneck, your first task is to find the sessions and queries that cause it. For a useful Amazon Database Blog post, see Analyze Amazon Aurora MySQL Workloads with Performance Insights.

To identify sessions and queries causing a bottleneck

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose your DB instance.
4. In **Database load**, choose **Slice by wait**.
5. Choose the **Top SQL** tab.

   The queries listed first are causing the highest load on the database.

Group your write operations

The following examples trigger the `io/aurora_redo_log_flush` wait event. (Autocommit is turned on.)

```
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
....
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');

UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE id=xx;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE id=xx;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE id=xx;
....
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE id=xx;

DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
....
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
```

To reduce the time spent waiting on the `io/aurora_redo_log_flush` wait event, group your write operations logically into a single commit to reduce persistent calls to storage.

Turn off autocommit

Turn off autocommit before making large changes that aren't within a transaction, as shown in the following example.

```
SET SESSION AUTOCOMMIT=OFF;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1=xx;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1=xx;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1=xx;
....
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1=xx;
-- Other DML statements here
COMMIT;

SET SESSION AUTOCOMMIT=ON;
```

Use transactions

You can use transactions, as shown in the following example.

```
BEGIN
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
....
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');

DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
....
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;

-- Other DML statements here
END
```

Use batches

You can make changes in batches, as shown in the following example. However, using batches that are too large can cause performance issues, especially in read replicas or when doing point-in-time recovery (PITR).

```
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES
('xxxx','xxxxx'),('xxxx','xxxxx'),...,('xxxx','xxxxx'),('xxxx','xxxxx');

UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1 BETWEEN xx AND
 xxx;

DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1<xx;
```

io/aurora_respond_to_client

The `io/aurora_respond_to_client` event occurs when a thread is waiting to return a result set to a client.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL version 2

Context

The event `io/aurora_respond_to_client` indicates that a thread is waiting to return a result set to a client.

The query processing is complete, and the results are being returned back to the application client. However, because there isn't enough network bandwidth on the DB cluster, a thread is waiting to return the result set.

Likely causes of increased waits

When the `io/aurora_respond_to_client` event appears more than normal, possibly indicating a performance problem, typical causes include the following:

DB instance class insufficient for the workload

The DB instance class used by the DB cluster doesn't have the necessary network bandwidth to process the workload efficiently.

Large result sets

There was an increase in size of the result set being returned, because the query returns higher numbers of rows. The larger result set consumes more network bandwidth.

Increased load on the client

There might be CPU pressure, memory pressure, or network saturation on the client. An increase in load on the client delays the reception of data from the Aurora MySQL DB cluster.

Increased network latency

There might be increased network latency between the Aurora MySQL DB cluster and client. Higher network latency increases the time required for the client to receive the data.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Identify the sessions and queries causing the events
- Scale the DB instance class
- Check workload for unexpected results
- Distribute workload with reader instances
- Use the SQL_BUFFER_RESULT modifier

Identify the sessions and queries causing the events

You can use Performance Insights to show queries blocked by the `io/aurora_respond_to_client` wait event. Typically, databases with moderate to significant load

have wait events. The wait events might be acceptable if performance is optimal. If performance isn't optimal, then examine where the database is spending the most time. Look at the wait events that contribute to the highest load, and find out whether you can optimize the database and application to reduce those events.

To find SQL queries that are responsible for high load

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose a DB instance. The Performance Insights dashboard is shown for that DB instance.
4. In the **Database load** chart, choose **Slice by wait**.
5. Choose the **Top SQL** tab.

   The chart lists the SQL queries that are responsible for the load. Those listed first are most responsible. To resolve a bottleneck, focus on these statements.

For a useful overview of troubleshooting using Performance Insights, see the Amazon Database Blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Scale the DB instance class

Check for the increase in the value of the Amazon CloudWatch metrics related to network throughput, such as `NetworkReceiveThroughput` and `NetworkTransmitThroughput`. If the DB instance class network bandwidth is being reached, you can scale the DB instance class used by the DB cluster by modifying the DB cluster. A DB instance class with larger network bandwidth returns data to clients more efficiently.

For information about monitoring Amazon CloudWatch metrics, see Viewing metrics in the Amazon RDS console. For information about DB instance classes, see Amazon AuroraDB instance classes. For information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

Check workload for unexpected results

Check the workload on the DB cluster and make sure that it isn't producing unexpected results. For example, there might be queries that are returning a higher number of rows than expected. In this case, you can use Performance Insights counter metrics such as `Innodb_rows_read`. For more information, see Detailed Database Metrics.

Distribute workload with reader instances

You can distribute read-only workload with Aurora replicas. You can scale horizontally by adding more Aurora replicas. Doing so can result in an increase in the throttling limits for network bandwidth. For more information, see Amazon Aurora DB clusters.

Use the SQL_BUFFER_RESULT modifier

You can add the `SQL_BUFFER_RESULT` modifier to `SELECT` statements to force the result into a temporary table before they are returned to the client. This modifier can help with performance issues when InnoDB locks aren't being freed because queries are in the `io/aurora_respond_to_client` wait state. For more information, see SELECT Statement in the MySQL documentation.

io/redo_log_flush

The `io/redo_log_flush` event occurs when a session is writing persistent data to Amazon Aurora storage.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL version 3

Context

The `io/redo_log_flush` event is for a write input/output (I/O) operation in Aurora MySQL.

> **Note**
>
> In Aurora MySQL version 2, this wait event is named io/aurora_redo_log_flush.

Likely causes of increased waits

For data persistence, commits require a durable write to stable storage. If the database is doing too many commits, there is a wait event on the write I/O operation, the `io/redo_log_flush` wait event.

For examples of the behavior of this wait event, see io/aurora_redo_log_flush.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Identify the problematic sessions and queries
- Group your write operations
- Turn off autocommit
- Use transactions
- Use batches

Identify the problematic sessions and queries

If your DB instance is experiencing a bottleneck, your first task is to find the sessions and queries that cause it. For a useful Amazon Database Blog post, see Analyze Amazon Aurora MySQL Workloads with Performance Insights.

To identify sessions and queries causing a bottleneck

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose your DB instance.
4. In **Database load**, choose **Slice by wait**.
5. Choose the **Top SQL** tab.

   The queries listed first are causing the highest load on the database.

Group your write operations

The following examples trigger the `io/redo_log_flush` wait event. (Autocommit is turned on.)

```
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
....
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');

UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE id=xx;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE id=xx;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE id=xx;
....
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE id=xx;

DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
....
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
```

To reduce the time spent waiting on the `io/redo_log_flush` wait event, group your write operations logically into a single commit to reduce persistent calls to storage.

Turn off autocommit

Turn off autocommit before making large changes that aren't within a transaction, as shown in the following example.

```
SET SESSION AUTOCOMMIT=OFF;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1=xx;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1=xx;
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1=xx;
....
UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1=xx;
-- Other DML statements here
COMMIT;

SET SESSION AUTOCOMMIT=ON;
```

Use transactions

You can use transactions, as shown in the following example.

```
BEGIN
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');
....
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES ('xxxx','xxxxx');

DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;
....
DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1=xx;

-- Other DML statements here
END
```

Use batches

You can make changes in batches, as shown in the following example. However, using batches that are too large can cause performance issues, especially in read replicas or when doing point-in-time recovery (PITR).

```
INSERT INTO `sampleDB`.`sampleTable` (sampleCol2, sampleCol3) VALUES
('xxxx','xxxxx'),('xxxx','xxxxx'),...,('xxxx','xxxxx'),('xxxx','xxxxx');

UPDATE `sampleDB`.`sampleTable` SET sampleCol3='xxxxx' WHERE sampleCol1 BETWEEN xx AND
 xxx;

DELETE FROM `sampleDB`.`sampleTable` WHERE sampleCol1<xx;
```

io/socket/sql/client_connection

The `io/socket/sql/client_connection` event occurs when a thread is in the process of handling a new connection.

Topics

- Supported engine versions

- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL versions 2 and 3

Context

The event `io/socket/sql/client_connection` indicates that mysqld is busy creating threads to handle incoming new client connections. In this scenario, the processing of servicing new client connection requests slows down while connections wait for the thread to be assigned. For more information, see MySQL server (mysqld).

Likely causes of increased waits

When this event appears more than normal, possibly indicating a performance problem, typical causes include the following:

- There is a sudden increase in new user connections from the application to your Amazon RDS instance.
- Your DB instance can't process new connections because the network, CPU, or memory is being throttled.

Actions

If `io/socket/sql/client_connection` dominates database activity, it doesn't necessarily indicate a performance problem. In a database that isn't idle, a wait event is always on top. Act only when performance degrades. We recommend different actions depending on the causes of your wait event.

Topics

- Identify the problematic sessions and queries
- Follow best practices for connection management

- Scale up your instance if resources are being throttled
- Check the top hosts and top users
- Query the performance_schema tables
- Check the thread states of your queries
- Audit your requests and queries
- Pool your database connections

Identify the problematic sessions and queries

If your DB instance is experiencing a bottleneck, your first task is to find the sessions and queries that cause it. For a useful blog post, see Analyze Amazon Aurora MySQL Workloads with Performance Insights.

To identify sessions and queries causing a bottleneck

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose your DB instance.
4. In **Database load**, choose **Slice by wait**.
5. Choose the **Top SQL** tab.

   The queries listed first are causing the highest load on the database.

Follow best practices for connection management

To manage your connections, consider the following strategies:

- Use connection pooling.

  You can gradually increase the number of connections as required. For more information, see the whitepaper Amazon Aurora MySQL Database Administrator's Handbook.
- Use a reader node to redistribute read-only traffic.

  For more information, see Aurora Replicas and Amazon Aurora endpoint connections.

Scale up your instance if resources are being throttled

Look for examples of throttling in the following resources:

- CPU

  Check your Amazon CloudWatch metrics for high CPU usage.
- Network

  Check for an increase in the value of the CloudWatch metrics `network receive throughput` and `network transmit throughput`. If your instance has reached the network bandwidth limit for your instance class, consider scaling up your RDS instance to a higher instance class type. For more information, see Amazon AuroraDB instance classes.
- Freeable memory

  Check for a drop in the CloudWatch metric `FreeableMemory`. Also, consider turning on Enhanced Monitoring. For more information, see Monitoring OS metrics with Enhanced Monitoring.

Check the top hosts and top users

Use Performance Insights to check the top hosts and top users. For more information, see Database Insights.

Query the performance_schema tables

To get an accurate count of the current and total connections, query the `performance_schema` tables. With this technique, you identify the source user or host that is responsible for creating a high number of connections. For example, query the `performance_schema` tables as follows.

```
SELECT * FROM performance_schema.accounts;
SELECT * FROM performance_schema.users;
SELECT * FROM performance_schema.hosts;
```

Check the thread states of your queries

If your performance issue is ongoing, check the thread states of your queries. In the `mysql` client, issue the following command.

```
show processlist;
```

Audit your requests and queries

To check the nature of the requests and queries from user accounts, use AuroraAurora MySQL Advanced Auditing. To learn how to turn on auditing, see Using Advanced Auditing with an Amazon Aurora MySQL DB cluster.

Pool your database connections

Consider using Amazon RDS Proxy for connection management. By using RDS Proxy, you can allow your applications to pool and share database connections to improve their ability to scale. RDS Proxy makes applications more resilient to database failures by automatically connecting to a standby DB instance while preserving application connections. For more information, see Amazon RDS Proxy for Aurora.

io/table/sql/handler

The `io/table/sql/handler` event occurs when work has been delegated to a storage engine.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL versions 2 and 3

Context

The event `io/table` indicates a wait for access to a table. This event occurs regardless of whether the data is cached in the buffer pool or accessed on disk. The `io/table/sql/handler` event indicates an increase in workload activity.

A *handler* is a routine specialized in a certain type of data or focused on certain special tasks. For example, an event handler receives and digests events and signals from the operating system or

from a user interface. A memory handler performs tasks related to memory. A file input handler is a function that receives file input and performs special tasks on the data, according to context.

Views such as `performance_schema.events_waits_current` often show `io/table/sql/handler` when the actual wait is a nested wait event such as a lock. When the actual wait isn't `io/table/sql/handler`, Performance Insights reports the nested wait event. When Performance Insights reports `io/table/sql/handler`, it represents InnoDB processing of the I/O request and not a hidden nested wait event. For more information, see Performance Schema Atom and Molecule Events in the *MySQL Reference Manual*.

The `io/table/sql/handler` event often appears in top wait events with I/O waits such as `io/aurora_redo_log_flush`.

Likely causes of increased waits

In Performance Insights, sudden spikes in the `io/table/sql/handler` event indicate an increase in workload activity. Increased activity means increased I/O.

Performance Insights filters the nesting event IDs and doesn't report a `io/table/sql/handler` wait when the underlying nested event is a lock wait. For example, if the root cause event is synch/mutex/innodb/aurora_lock_thread_slot_futex, Performance Insights displays this wait in top wait events and not `io/table/sql/handler`.

In views such as `performance_schema.events_waits_current`, waits for `io/table/sql/handler` often appear when the actual wait is a nested wait event such as a lock. When the actual wait differs from `io/table/sql/handler`, Performance Insights looks up the nested wait and reports the actual wait instead of `io/table/sql/handler`. When Performance Insights reports `io/table/sql/handler`, the real wait is `io/table/sql/handler` and not a hidden nested wait event. For more information, see Performance Schema Atom and Molecule Events in the *MySQL 5.7 Reference Manual*.

Actions

If this wait event dominates database activity, it doesn't necessarily indicate a performance problem. A wait event is always on top when the database is active. You need to act only when performance degrades.

We recommend different actions depending on the other wait events that you see.

Topics

- Identify the sessions and queries causing the events
- Check for a correlation with detailed database metrics
- Check for other correlated wait events

Identify the sessions and queries causing the events

Typically, databases with moderate to significant load have wait events. The wait events might be acceptable if performance is optimal. If performance is isn't optimal, then examine where the database is spending the most time. Look at the wait events that contribute to the highest load, and find out whether you can optimize the database and application to reduce those events.

To find SQL queries that are responsible for high load

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose a DB instance. The Performance Insights dashboard is shown for that DB instance.
4. In the **Database load** chart, choose **Slice by wait**.
5. Choose the **Top SQL** tab.

   The chart lists the SQL queries that are responsible for the load. Those listed first are most responsible. To resolve a bottleneck, focus on these statements.

For a useful overview of troubleshooting using Performance Insights, see the blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Check for a correlation with detailed database metrics

Check for database counter metrics such as `Innodb_rows_changed`. If counter metrics are correlated with `io/table/sql/handler`, follow these steps:

1. In Performance Insights, look for the SQL statements accounting for the `io/table/sql/handler` top wait event. If possible, optimize this statement so that it returns fewer rows.
2. Retrieve the top tables from the `schema_table_statistics` and `x$schema_table_statistics` views. These views show the amount of time spent per table. For more information, see The schema_table_statistics and x$schema_table_statistics Views in the *MySQL Reference Manual*.

By default, rows are sorted by descending total wait time. Tables with the most contention appear first. The output indicates whether time is spent on reads, writes, fetches, inserts, updates, or deletes.

```
mysql> select * from sys.schema_table_statistics limit 1\G

*************************** 1. row ***************************
     table_schema: read_only_db
       table_name: sbtest41
    total_latency: 54.11 m
     rows_fetched: 6001557
    fetch_latency: 39.14 m
    rows_inserted: 14833
   insert_latency: 5.78 m
     rows_updated: 30470
   update_latency: 5.39 m
     rows_deleted: 14833
   delete_latency: 3.81 m
 io_read_requests: NULL
          io_read: NULL
  io_read_latency: NULL
io_write_requests: NULL
         io_write: NULL
 io_write_latency: NULL
 io_misc_requests: NULL
  io_misc_latency: NULL
1 row in set (0.11 sec)
```

Check for other correlated wait events

If `synch/sxlock/innodb/btr_search_latch` and `io/table/sql/handler` contribute most to the DB load anomaly together, check whether the `innodb_adaptive_hash_index` variable is turned on. If it is, consider increasing the `innodb_adaptive_hash_index_parts` parameter value.

If the Adaptive Hash Index is turned off, consider turning it on. To learn more about the MySQL Adaptive Hash Index, see the following resources:

- The article Is Adaptive Hash Index in InnoDB right for my workload? on the Percona website
- Adaptive Hash Index in the *MySQL Reference Manual*

- The article Contention in MySQL InnoDB: Useful Info From the Semaphores Section on the Percona website

> **Note**
>
> The Adaptive Hash Index isn't supported on Aurora reader DB instances.
> In some cases, performance might be poor on a reader instance when `synch/sxlock/innodb/btr_search_latch` and `io/table/sql/handler` are dominant. If so, consider redirecting the workload temporarily to the writer DB instance and turning on the Adaptive Hash Index.

synch/cond/innodb/row_lock_wait

The `synch/cond/innodb/row_lock_wait` event occurs when one session has locked a row for an update, and another session tries to update the same row. For more information, see InnoDB locking in the MySQL documentation.

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL version 3

Likely causes of increased waits

Multiple data manipulation language (DML) statements are accessing the same row or rows simultaneously.

Actions

We recommend different actions depending on the other wait events that you see.

Topics

- Find and respond to the SQL statements responsible for this wait event
- Find and respond to the blocking session

Find and respond to the SQL statements responsible for this wait event

Use Performance Insights to identify the SQL statements responsible for this wait event. Consider the following strategies:

- If row locks are a persistent problem, consider rewriting the application to use optimistic locking.
- Use multirow statements.
- Spread the workload over different database objects. You can do this through partitioning.
- Check the value of the `innodb_lock_wait_timeout` parameter. It controls how long transactions wait before generating a timeout error.

For a useful overview of troubleshooting using Performance Insights, see the blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Find and respond to the blocking session

Determine whether the blocking session is idle or active. Also, find out whether the session comes from an application or an active user.

To identify the session holding the lock, you can run `SHOW ENGINE INNODB STATUS`. The following example shows sample output.

```
mysql> SHOW ENGINE INNODB STATUS;

---TRANSACTION 1688153, ACTIVE 82 sec starting index read
mysql tables in use 1, locked 1
LOCK WAIT 2 lock struct(s), heap size 1136, 2 row lock(s)
MySQL thread id 4244, OS thread handle 70369524330224, query id 4020834 172.31.14.179
 reinvent executing
select id1 from test.t1 where id1=1 for update
------- TRX HAS BEEN WAITING 24 SEC FOR THIS LOCK TO BE GRANTED:
RECORD LOCKS space id 11 page no 4 n bits 72 index GEN_CLUST_INDEX of table test.t1 trx
 id 1688153 lock_mode X waiting
Record lock, heap no 2 PHYSICAL RECORD: n_fields 5; compact format; info bits 0
```

Or you can use the following query to extract details on current locks.

```
mysql> SELECT p1.id waiting_thread,
    p1.user waiting_user,
    p1.host waiting_host,
```

```
    it1.trx_query waiting_query,
    ilw.requesting_engine_transaction_id waiting_transaction,
    ilw.blocking_engine_lock_id blocking_lock,
    il.lock_mode blocking_mode,
    il.lock_type blocking_type,
    ilw.blocking_engine_transaction_id blocking_transaction,
    CASE it.trx_state
        WHEN 'LOCK WAIT'
        THEN it.trx_state
        ELSE p.state end blocker_state,
    concat(il.object_schema,'.', il.object_name) as locked_table,
    it.trx_mysql_thread_id blocker_thread,
    p.user blocker_user,
    p.host blocker_host
FROM performance_schema.data_lock_waits ilw
JOIN performance_schema.data_locks il
ON ilw.blocking_engine_lock_id = il.engine_lock_id
AND ilw.blocking_engine_transaction_id = il.engine_transaction_id
JOIN information_schema.innodb_trx it
ON ilw.blocking_engine_transaction_id = it.trx_id join information_schema.processlist p
ON it.trx_mysql_thread_id = p.id join information_schema.innodb_trx it1
ON ilw.requesting_engine_transaction_id = it1.trx_id join
 information_schema.processlist p1
ON it1.trx_mysql_thread_id = p1.id\G

*************************** 1. row ***************************
waiting_thread: 4244
waiting_user: reinvent
waiting_host: 123.456.789.012:18158
waiting_query: select id1 from test.t1 where id1=1 for update
waiting_transaction: 1688153
blocking_lock: 70369562074216:11:4:2:70369549808672
blocking_mode: X
blocking_type: RECORD
blocking_transaction: 1688142
blocker_state: User sleep
locked_table: test.t1
blocker_thread: 4243
blocker_user: reinvent
blocker_host: 123.456.789.012:18156
1 row in set (0.00 sec)
```

When you identify the session, your options include the following:

- Contact the application owner or the user.
- If the blocking session is idle, consider ending the blocking session. This action might trigger a long rollback. To learn how to end a session, see Ending a session or query.

For more information about identifying blocking transactions, see Using InnoDB transaction and locking information in the MySQL documentation.

synch/cond/innodb/row_lock_wait_cond

The `synch/cond/innodb/row_lock_wait_cond` event occurs when one session has locked a row for an update, and another session tries to update the same row. For more information, see InnoDB locking in the MySQL documentation.

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL version 2

Likely causes of increased waits

Multiple data manipulation language (DML) statements are accessing the same row or rows simultaneously.

Actions

We recommend different actions depending on the other wait events that you see.

Topics

- Find and respond to the SQL statements responsible for this wait event
- Find and respond to the blocking session

Find and respond to the SQL statements responsible for this wait event

Use Performance Insights to identify the SQL statements responsible for this wait event. Consider the following strategies:

- If row locks are a persistent problem, consider rewriting the application to use optimistic locking.

- Use multirow statements.
- Spread the workload over different database objects. You can do this through partitioning.
- Check the value of the `innodb_lock_wait_timeout` parameter. It controls how long transactions wait before generating a timeout error.

For a useful overview of troubleshooting using Performance Insights, see the blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Find and respond to the blocking session

Determine whether the blocking session is idle or active. Also, find out whether the session comes from an application or an active user.

To identify the session holding the lock, you can run `SHOW ENGINE INNODB STATUS`. The following example shows sample output.

```
mysql> SHOW ENGINE INNODB STATUS;

---TRANSACTION 2771110, ACTIVE 112 sec starting index read
mysql tables in use 1, locked 1
LOCK WAIT 2 lock struct(s), heap size 1136, 1 row lock(s)
MySQL thread id 24, OS thread handle 70369573642160, query id 13271336 172.31.14.179
 reinvent Sending data
select id1 from test.t1 where id1=1 for update
------- TRX HAS BEEN WAITING 43 SEC FOR THIS LOCK TO BE GRANTED:
RECORD LOCKS space id 11 page no 3 n bits 0 index GEN_CLUST_INDEX of table test.t1 trx
 id 2771110 lock_mode X waiting
Record lock, heap no 2 PHYSICAL RECORD: n_fields 5; compact format; info bits 0
```

Or you can use the following query to extract details on current locks.

```
mysql> SELECT p1.id waiting_thread,
              p1.user waiting_user,
              p1.host waiting_host,
              it1.trx_query waiting_query,
              ilw.requesting_trx_id waiting_transaction,
              ilw.blocking_lock_id blocking_lock,
              il.lock_mode blocking_mode,
              il.lock_type blocking_type,
              ilw.blocking_trx_id blocking_transaction,
              CASE it.trx_state
```

```
                WHEN 'LOCK WAIT'
                THEN it.trx_state
                ELSE p.state
              END blocker_state,
              il.lock_table locked_table,
              it.trx_mysql_thread_id blocker_thread,
              p.user blocker_user,
              p.host blocker_host
       FROM information_schema.innodb_lock_waits ilw
       JOIN information_schema.innodb_locks il
         ON ilw.blocking_lock_id = il.lock_id
        AND ilw.blocking_trx_id = il.lock_trx_id
       JOIN information_schema.innodb_trx it
         ON ilw.blocking_trx_id = it.trx_id
       JOIN information_schema.processlist p
         ON it.trx_mysql_thread_id = p.id
       JOIN information_schema.innodb_trx it1
         ON ilw.requesting_trx_id = it1.trx_id
       JOIN information_schema.processlist p1
         ON it1.trx_mysql_thread_id = p1.id\G

*************************** 1. row ***************************
      waiting_thread: 3561959471
        waiting_user: reinvent
        waiting_host: 123.456.789.012:20485
       waiting_query: select id1 from test.t1 where id1=1 for update
 waiting_transaction: 312337314
       blocking_lock: 312337287:261:3:2
       blocking_mode: X
       blocking_type: RECORD
blocking_transaction: 312337287
       blocker_state: User sleep
        locked_table: `test`.`t1`
      blocker_thread: 3561223876
        blocker_user: reinvent
        blocker_host: 123.456.789.012:17746
1 row in set (0.04 sec)
```

When you identify the session, your options include the following:

- Contact the application owner or the user.
- If the blocking session is idle, consider ending the blocking session. This action might trigger a long rollback. To learn how to end a session, see Ending a session or query.

For more information about identifying blocking transactions, see Using InnoDB transaction and locking information in the MySQL documentation.

synch/cond/sql/MDL_context::COND_wait_status

The `synch/cond/sql/MDL_context::COND_wait_status` event occurs when there are threads waiting on a table metadata lock.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL versions 2 and 3

Context

The event `synch/cond/sql/MDL_context::COND_wait_status` indicates that there are threads waiting on a table metadata lock. In some cases, one session holds a metadata lock on a table and another session tries to get the same lock on the same table. In such a case, the second session waits on the `synch/cond/sql/MDL_context::COND_wait_status` wait event.

MySQL uses metadata locking to manage concurrent access to database objects and to ensure data consistency. Metadata locking applies to tables, schemas, scheduled events, tablespaces, and user locks acquired with the `get_lock` function, and stored programs. Stored programs include procedures, functions, and triggers. For more information, see Metadata locking in the MySQL documentation.

The MySQL process list shows this session in the state `waiting for metadata lock`. In Performance Insights, if `Performance_schema` is turned on, the event `synch/cond/sql/MDL_context::COND_wait_status` appears.

The default timeout for a query waiting on a metadata lock is based on the value of the `lock_wait_timeout` parameter, which defaults to 31,536,000 seconds (365 days).

For more details on different InnoDB locks and the types of locks that can cause conflicts, see InnoDB Locking in the MySQL documentation.

Likely causes of increased waits

When the `synch/cond/sql/MDL_context::COND_wait_status` event appears more than normal, possibly indicating a performance problem, typical causes include the following:

Long-running transactions

One or more transactions are modifying a large amount of data and holding locks on tables for a very long time.

Idle transactions

One or more transactions remain open for a long time, without being committed or rolled back.

DDL statements on large tables

One or more data definition statements (DDL) statements, such as `ALTER TABLE` commands, were run on very large tables.

Explicit table locks

There are explicit locks on tables that aren't being released in a timely manner. For example, an application might run `LOCK TABLE` statements improperly.

Actions

We recommend different actions depending on the causes of your wait event and on the version of the Aurora MySQL DB cluster.

Topics

- Identify the sessions and queries causing the events
- Check for past events
- Run queries on Aurora MySQL version 2
- Respond to the blocking session

Identify the sessions and queries causing the events

You can use Performance Insights to show queries blocked by the `synch/cond/sql/MDL_context::COND_wait_status` wait event. However, to identify the blocking session, query metadata tables from `performance_schema` and `information_schema` on the DB cluster.

Typically, databases with moderate to significant load have wait events. The wait events might be acceptable if performance is optimal. If performance isn't optimal, then examine where the database is spending the most time. Look at the wait events that contribute to the highest load, and find out whether you can optimize the database and application to reduce those events.

To find SQL queries that are responsible for high load

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose a DB instance. The Performance Insights dashboard for that DB instance appears.
4. In the **Database load** chart, choose **Slice by wait**.
5. Choose the **Top SQL** tab.

   The chart lists the SQL queries that are responsible for the load. Those listed first are most responsible. To resolve a bottleneck, focus on these statements.

For a useful overview of troubleshooting using Performance Insights, see the Amazon Database Blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Check for past events

You can gain insight into this wait event to check for past occurrences of it. To do so, complete the following actions:

- Check the data manipulation language (DML) and DDL throughput and latency to see if there were any changes in workload.

  You can use Performance Insights to find queries waiting on this event at the time of the issue. Also, you can view the digest of the queries run near the time of issue.
- If audit logs or general logs are turned on for the DB cluster, you can check for all queries run on the objects (schema.table) involved in the waiting transaction. You can also check for the queries that completed running before the transaction.

The information available to troubleshoot past events is limited. Performing these checks doesn't show which object is waiting for information. However, you can identify tables with heavy load at the time of the event and the set of frequently operated rows causing conflict at the time of issue. You can then use this information to reproduce the issue in a test environment and provide insights about its cause.

Run queries on Aurora MySQL version 2

In Aurora MySQL version 2, you can identify the blocked session directly by querying `performance_schema` tables or `sys` schema views. An example can illustrate how to query tables to identify blocking queries and sessions.

In the following process list output, the connection ID 89 is waiting on a metadata lock, and it's running a `TRUNCATE TABLE` command. In a query on the `performance_schema` tables or `sys` schema views, the output shows that the blocking session is 76.

```
MySQL [(none)]> select @@version, @@aurora_version;
+-----------+------------------+
| @@version | @@aurora_version |
+-----------+------------------+
| 5.7.12    | 2.11.5           |
+-----------+------------------+
1 row in set (0.01 sec)

MySQL [(none)]> show processlist;
+----+-----------------+--------------------+-----------+---------+------
+---------------------------------+------------------------------+
| Id | User            | Host               | db        | Command | Time | State
                    | Info                           |
+----+-----------------+--------------------+-----------+---------+------
+---------------------------------+------------------------------+
|  2 | rdsadmin        | localhost          | NULL      | Sleep   |    0 | NULL
                    | NULL                           |
|  4 | rdsadmin        | localhost          | NULL      | Sleep   |    2 | NULL
                    | NULL                           |
|  5 | rdsadmin        | localhost          | NULL      | Sleep   |    1 | NULL
                    | NULL                           |
| 20 | rdsadmin        | localhost          | NULL      | Sleep   |    0 | NULL
                    | NULL                           |
| 21 | rdsadmin        | localhost          | NULL      | Sleep   |  261 | NULL
                    | NULL                           |
```

```
| 66 | auroramysql5712 | 172.31.21.51:52154 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 67 | auroramysql5712 | 172.31.21.51:52158 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 68 | auroramysql5712 | 172.31.21.51:52150 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 69 | auroramysql5712 | 172.31.21.51:52162 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 70 | auroramysql5712 | 172.31.21.51:52160 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 71 | auroramysql5712 | 172.31.21.51:52152 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 72 | auroramysql5712 | 172.31.21.51:52156 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 73 | auroramysql5712 | 172.31.21.51:52164 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 74 | auroramysql5712 | 172.31.21.51:52166 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 75 | auroramysql5712 | 172.31.21.51:52168 | sbtest123 | Sleep   |    0 | NULL
                    | NULL                          |
| 76 | auroramysql5712 | 172.31.21.51:52170 | NULL      | Query   |    0 | starting
                    | show processlist              |
| 88 | auroramysql5712 | 172.31.21.51:52194 | NULL      | Query   |   22 | User sleep
                    | select sleep(10000)           |
| 89 | auroramysql5712 | 172.31.21.51:52196 | NULL      | Query   |    5 | Waiting for
 table metadata lock | truncate table sbtest.sbtest1 |
+----+-----------------+--------------------+-----------+---------+------
+---------------------------------+------------------------------+
18 rows in set (0.00 sec)
```

Next, a query on the `performance_schema` tables or `sys` schema views shows that the blocking session is 76.

```
MySQL [(none)]> select * from sys.schema_table_lock_waits;

+---------------+-------------+-------------------+-------------
+-------------------------------+-------------------+-----------------------
+-------------------------------+--------------------+-----------------------------
+-------------------------------+--------------------+--------------
+-------------------------------+--------------------+-----------------------
+--------------------------+------------------------------+
| object_schema | object_name | waiting_thread_id | waiting_pid | waiting_account
           | waiting_lock_type | waiting_lock_duration | waiting_query
```

```
   | waiting_query_secs | waiting_query_rows_affected | waiting_query_rows_examined |
 blocking_thread_id | blocking_pid | blocking_account             | blocking_lock_type
 | blocking_lock_duration | sql_kill_blocking_query | sql_kill_blocking_connection |
+--------------+------------+------------------+------------
+------------------------------+------------------+----------------------
+------------------------------+--------------------+---------------------------
+------------------------------+--------------------+-------------
+------------------------------+--------------------+----------------------
+--------------------------+------------------------------+
| sbtest        | sbtest1     |               121 |          89 |
 auroramysql5712@192.0.2.0    | EXCLUSIVE         | TRANSACTION           | truncate
 table sbtest.sbtest1 |                 10 |                           0 |
               0 |                108 |           76 | auroramysql5712@192.0.2.0    |
 SHARED_READ        | TRANSACTION            | KILL QUERY 76           | KILL 76
              |
+--------------+------------+------------------+------------
+------------------------------+------------------+----------------------
+------------------------------+--------------------+---------------------------
+------------------------------+--------------------+-------------
+------------------------------+--------------------+----------------------
+--------------------------+------------------------------+
1 row in set (0.00 sec)
```

Respond to the blocking session

When you identify the session, your options include the following:

- Contact the application owner or the user.
- If the blocking session is idle, consider ending the blocking session. This action might trigger a long rollback. To learn how to end a session, see Ending a session or query.

For more information about identifying blocking transactions, see Using InnoDB Transaction and Locking Information in the MySQL documentation.

synch/mutex/innodb/aurora_lock_thread_slot_futex

The `synch/mutex/innodb/aurora_lock_thread_slot_futex` event occurs when one session has locked a row for an update, and another session tries to update the same row. For more information, see InnoDB locking in the *MySQL Reference*.

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL version 2

Likely causes of increased waits

Multiple data manipulation language (DML) statements are accessing the same row or rows simultaneously.

Actions

We recommend different actions depending on the other wait events that you see.

Topics

- Find and respond to the SQL statements responsible for this wait event
- Find and respond to the blocking session

Find and respond to the SQL statements responsible for this wait event

Use Performance Insights to identify the SQL statements responsible for this wait event. Consider the following strategies:

- If row locks are a persistent problem, consider rewriting the application to use optimistic locking.
- Use multirow statements.
- Spread the workload over different database objects. You can do this through partitioning.
- Check the value of the `innodb_lock_wait_timeout` parameter. It controls how long transactions wait before generating a timeout error.

For a useful overview of troubleshooting using Performance Insights, see the blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Find and respond to the blocking session

Determine whether the blocking session is idle or active. Also, find out whether the session comes from an application or an active user.

To identify the session holding the lock, you can run `SHOW ENGINE INNODB STATUS`. The following example shows sample output.

```
mysql> SHOW ENGINE INNODB STATUS;

----------------------TRANSACTION 302631452, ACTIVE 2 sec starting index read
mysql tables in use 1, locked 1
LOCK WAIT 2 lock struct(s), heap size 376, 1 row lock(s)
MySQL thread id 80109, OS thread handle 0x2ae915060700, query id 938819 10.0.4.12
 reinvent updating
UPDATE sbtest1 SET k=k+1 WHERE id=503
------- TRX HAS BEEN WAITING 2 SEC FOR THIS LOCK TO BE GRANTED:
RECORD LOCKS space id 148 page no 11 n bits 30 index `PRIMARY` of table
 `sysbench2`.`sbtest1` trx id 302631452 lock_mode X locks rec but not gap waiting
Record lock, heap no 30 PHYSICAL RECORD: n_fields 6; compact format; info bits 0
```

Or you can use the following query to extract details on current locks.

```
mysql> SELECT p1.id waiting_thread,
              p1.user waiting_user,
              p1.host waiting_host,
              it1.trx_query waiting_query,
              ilw.requesting_trx_id waiting_transaction,
              ilw.blocking_lock_id blocking_lock,
              il.lock_mode blocking_mode,
              il.lock_type blocking_type,
              ilw.blocking_trx_id blocking_transaction,
              CASE it.trx_state
                WHEN 'LOCK WAIT'
                THEN it.trx_state
                ELSE p.state
              END blocker_state,
              il.lock_table locked_table,
              it.trx_mysql_thread_id blocker_thread,
              p.user blocker_user,
              p.host blocker_host
       FROM information_schema.innodb_lock_waits ilw
       JOIN information_schema.innodb_locks il
         ON ilw.blocking_lock_id = il.lock_id
        AND ilw.blocking_trx_id = il.lock_trx_id
       JOIN information_schema.innodb_trx it
         ON ilw.blocking_trx_id = it.trx_id
       JOIN information_schema.processlist p
```

```
         ON it.trx_mysql_thread_id = p.id
       JOIN information_schema.innodb_trx it1
         ON ilw.requesting_trx_id = it1.trx_id
       JOIN information_schema.processlist p1
         ON it1.trx_mysql_thread_id = p1.id\G

*************************** 1. row ***************************
      waiting_thread: 3561959471
        waiting_user: reinvent
        waiting_host: 123.456.789.012:20485
       waiting_query: select id1 from test.t1 where id1=1 for update
 waiting_transaction: 312337314
       blocking_lock: 312337287:261:3:2
       blocking_mode: X
       blocking_type: RECORD
blocking_transaction: 312337287
       blocker_state: User sleep
        locked_table: `test`.`t1`
      blocker_thread: 3561223876
        blocker_user: reinvent
        blocker_host: 123.456.789.012:17746
1 row in set (0.04 sec)
```

When you identify the session, your options include the following:

- Contact the application owner or the user.
- If the blocking session is idle, consider ending the blocking session. This action might trigger a long rollback. To learn how to end a session, see Ending a session or query.

For more information about identifying blocking transactions, see Using InnoDB Transaction and Locking Information in the *MySQL Reference Manual*.

synch/mutex/innodb/buf_pool_mutex

The `synch/mutex/innodb/buf_pool_mutex` event occurs when a thread has acquired a lock on the InnoDB buffer pool to access a page in memory.

Topics

- Relevant engine versions
- Context

- Likely causes of increased waits
- Actions

Relevant engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL version 2

Context

The `buf_pool` mutex is a single mutex that protects the control data structures of the buffer pool.

For more information, see Monitoring InnoDB Mutex Waits Using Performance Schema in the MySQL documentation.

Likely causes of increased waits

This is a workload-specific wait event. Common causes for `synch/mutex/innodb/buf_pool_mutex` to appear among the top wait events include the following:

- The buffer pool size isn't large enough to hold the working set of data.
- The workload is more specific to certain pages from a specific table in the database, leading to contention in the buffer pool.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Identify the sessions and queries causing the events
- Use Performance Insights
- Create Aurora Replicas
- Examine the buffer pool size
- Monitor the global status history

Identify the sessions and queries causing the events

Typically, databases with moderate to significant load have wait events. The wait events might be acceptable if performance is optimal. If performance isn't optimal, then examine where the database is spending the most time. Look at the wait events that contribute to the highest load, and find out whether you can optimize the database and application to reduce those events.

To view the Top SQL chart in the Amazon Management Console

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose a DB instance. The Performance Insights dashboard is shown for that DB instance.
4. In the **Database load** chart, choose **Slice by wait**.
5. Underneath the **Database load** chart, choose **Top SQL**.

   The chart lists the SQL queries that are responsible for the load. Those listed first are most responsible. To resolve a bottleneck, focus on these statements.

For a useful overview of troubleshooting using Performance Insights, see the blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Use Performance Insights

This event is related to workload. You can use Performance Insights to do the following:

- Identify when wait events start, and whether there's any change in the workload around that time from the application logs or related sources.
- Identify the SQL statements responsible for this wait event. Examine the execution plan of the queries to make sure that these queries are optimized and using appropriate indexes.

  If the top queries responsible for the wait event are related to the same database object or table, then consider partitioning that object or table.

Create Aurora Replicas

You can create Aurora Replicas to serve read-only traffic. You can also use Aurora Auto Scaling to handle surges in read traffic. Make sure to run scheduled read-only tasks and logical backups on Aurora Replicas.

For more information, see Amazon Aurora Auto Scaling with Aurora Replicas.

Examine the buffer pool size

Check whether the buffer pool size is sufficient for the workload by looking at the metric `innodb_buffer_pool_wait_free`. If the value of this metric is high and increasing continuously, that indicates that the size of the buffer pool isn't sufficient to handle the workload. If `innodb_buffer_pool_size` has been set properly, the value of `innodb_buffer_pool_wait_free` should be small. For more information, see Innodb_buffer_pool_wait_free in the MySQL documentation.

Increase the buffer pool size if the DB instance has enough memory for session buffers and operating-system tasks. If it doesn't, change the DB instance to a larger DB instance class to get additional memory that can be allocated to the buffer pool.

> **Note**
>
> Aurora MySQL automatically adjusts the value of `innodb_buffer_pool_instances` based on the configured `innodb_buffer_pool_size`.

Monitor the global status history

By monitoring the change rates of status variables, you can detect locking or memory issues on your DB instance. Turn on Global Status History (GoSH) if it isn't already turned on. For more information on GoSH, see Managing the global status history.

You can also create custom Amazon CloudWatch metrics to monitor status variables. For more information, see Publishing custom metrics.

synch/mutex/innodb/fil_system_mutex

The `synch/mutex/innodb/fil_system_mutex` event occurs when a session is waiting to access the tablespace memory cache.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits

- Actions

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL versions 2 and 3

Context

InnoDB uses tablespaces to manage the storage area for tables and log files. The *tablespace memory cache* is a global memory structure that maintains information about tablespaces. MySQL uses `synch/mutex/innodb/fil_system_mutex` waits to control concurrent access to the tablespace memory cache.

The event `synch/mutex/innodb/fil_system_mutex` indicates that there is currently more than one operation that needs to retrieve and manipulate information in the tablespace memory cache for the same tablespace.

Likely causes of increased waits

When the `synch/mutex/innodb/fil_system_mutex` event appears more than normal, possibly indicating a performance problem, this typically occurs when all of the following conditions are present:

- An increase in concurrent data manipulation language (DML) operations that update or delete data in the same table.
- The tablespace for this table is very large and has a lot of data pages.
- The fill factor for these data pages is low.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Identify the sessions and queries causing the events
- Reorganize large tables during off-peak hours

Identify the sessions and queries causing the events

Typically, databases with moderate to significant load have wait events. The wait events might be acceptable if performance is optimal. If performance isn't optimal, examine where the database is spending the most time. Look at the wait events that contribute to the highest load, and find out whether you can optimize the database and application to reduce those events.

To find SQL queries that are responsible for high load

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose a DB instance. The Performance Insights dashboard appears for that DB instance.
4. In the **Database load** chart, choose **Slice by wait**.
5. Choose the **Top SQL** tab.

   The chart lists the SQL queries that are responsible for the load. Those listed first are most responsible. To resolve a bottleneck, focus on these statements.

For a useful overview of troubleshooting using Performance Insights, see the blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Another way to find out which queries are causing high numbers of `synch/mutex/innodb/fil_system_mutex` waits is to check `performance_schema`, as in the following example.

```
mysql> select * from performance_schema.events_waits_current where EVENT_NAME='wait/
synch/mutex/innodb/fil_system_mutex'\G
*************************** 1. row ***************************
            THREAD_ID: 19
             EVENT_ID: 195057
         END_EVENT_ID: 195057
           EVENT_NAME: wait/synch/mutex/innodb/fil_system_mutex
               SOURCE: fil0fil.cc:6700
          TIMER_START: 1010146190118400
            TIMER_END: 1010146196524000
           TIMER_WAIT: 6405600
                SPINS: NULL
        OBJECT_SCHEMA: NULL
          OBJECT_NAME: NULL
           INDEX_NAME: NULL
```

```
          OBJECT_TYPE: NULL
OBJECT_INSTANCE_BEGIN: 47285552262176
     NESTING_EVENT_ID: NULL
   NESTING_EVENT_TYPE: NULL
            OPERATION: lock
      NUMBER_OF_BYTES: NULL
                FLAGS: NULL
*************************** 2. row ***************************
            THREAD_ID: 23
             EVENT_ID: 5480
         END_EVENT_ID: 5480
           EVENT_NAME: wait/synch/mutex/innodb/fil_system_mutex
               SOURCE: fil0fil.cc:5906
          TIMER_START: 995269979908800
            TIMER_END: 995269980159200
           TIMER_WAIT: 250400
                SPINS: NULL
        OBJECT_SCHEMA: NULL
          OBJECT_NAME: NULL
           INDEX_NAME: NULL
          OBJECT_TYPE: NULL
OBJECT_INSTANCE_BEGIN: 47285552262176
     NESTING_EVENT_ID: NULL
   NESTING_EVENT_TYPE: NULL
            OPERATION: lock
      NUMBER_OF_BYTES: NULL
                FLAGS: NULL
*************************** 3. row ***************************
            THREAD_ID: 55
             EVENT_ID: 23233794
         END_EVENT_ID: NULL
           EVENT_NAME: wait/synch/mutex/innodb/fil_system_mutex
               SOURCE: fil0fil.cc:449
          TIMER_START: 1010492125341600
            TIMER_END: 1010494304900000
           TIMER_WAIT: 2179558400
                SPINS: NULL
        OBJECT_SCHEMA: NULL
          OBJECT_NAME: NULL
           INDEX_NAME: NULL
          OBJECT_TYPE: NULL
OBJECT_INSTANCE_BEGIN: 47285552262176
     NESTING_EVENT_ID: 23233786
   NESTING_EVENT_TYPE: WAIT
```

```
            OPERATION: lock
      NUMBER_OF_BYTES: NULL
                FLAGS: NULL
```

Reorganize large tables during off-peak hours

Reorganize large tables that you identify as the source of high numbers of `synch/mutex/innodb/fil_system_mutex` wait events during a maintenance window outside of production hours. Doing so ensures that the internal tablespaces map cleanup doesn't occur when quick access to the table is critical. For information about reorganizing tables, see OPTIMIZE TABLE Statement in the *MySQL Reference*.

synch/mutex/innodb/trx_sys_mutex

The `synch/mutex/innodb/trx_sys_mutex` event occurs when there is high database activity with a large number of transactions.

Topics

- Relevant engine versions
- Context
- Likely causes of increased waits
- Actions

Relevant engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL versions 2 and 3

Context

Internally, the InnoDB database engine uses the repeatable read isolation level with snapshots to provide read consistency. This gives you a point-in-time view of the database at the time the snapshot was created.

In InnoDB, all changes are applied to the database as soon as they arrive, regardless of whether they're committed. This approach means that without multiversion concurrency control (MVCC),

all users connected to the database see all of the changes and the latest rows. Therefore, InnoDB requires a way to track the changes to understand what to roll back when necessary.

To do this, InnoDB uses a transaction system (`trx_sys`) to track snapshots. The transaction system does the following:

- Tracks the transaction ID for each row in the undo logs.
- Uses an internal InnoDB structure called `ReadView` that helps to identify which transaction IDs are visible for a snapshot.

Likely causes of increased waits

Any database operation that requires the consistent and controlled handling (creating, reading, updating, and deleting) of transactions IDs generates a call from `trx_sys` to the mutex.

These calls happen inside three functions:

- `trx_sys_mutex_enter` – Creates the mutex.
- `trx_sys_mutex_exit` – Releases the mutex.
- `trx_sys_mutex_own` – Tests whether the mutex is owned.

The InnoDB Performance Schema instrumentation tracks all `trx_sys` mutex calls. Tracking includes, but isn't limited to, management of `trx_sys` on database startup or shutdown, rollback operations, undo cleanups, row read access, and buffer pool loads. High database activity with a large number of transactions results in `synch/mutex/innodb/trx_sys_mutex` appearing among the top wait events.

For more information, see Monitoring InnoDB Mutex Waits Using Performance Schema in the MySQL documentation.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Identify the sessions and queries causing the events
- Examine other wait events

Identify the sessions and queries causing the events

Typically, databases with moderate to significant load have wait events. The wait events might be acceptable if performance is optimal. If performance isn't optimal, then examine where the database is spending the most time. Look at the wait events that contribute to the highest load. Find out whether you can optimize the database and application to reduce those events.

To view the Top SQL chart in the Amazon Web Services Management Console

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose a DB instance. The Performance Insights dashboard is shown for that DB instance.
4. In the **Database load** chart, choose **Slice by wait**.
5. Under the **Database load** chart, choose **Top SQL**.

   The chart lists the SQL queries that are responsible for the load. Those listed first are most responsible. To resolve a bottleneck, focus on these statements.

For a useful overview of troubleshooting using Performance Insights, see the blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Examine other wait events

Examine the other wait events associated with the `synch/mutex/innodb/trx_sys_mutex` wait event. Doing this can provide more information about the nature of the workload. A large number of transactions might reduce throughput, but the workload might also make this necessary.

For more information on how to optimize transactions, see Optimizing InnoDB Transaction Management in the MySQL documentation.

synch/sxlock/innodb/hash_table_locks

The `synch/sxlock/innodb/hash_table_locks` event occurs when pages not found in the buffer pool must be read from storage.

Topics

- Supported engine versions
- Context

- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for the following versions:

- Aurora MySQL versions 2 and 3

Context

The event `synch/sxlock/innodb/hash_table_locks` indicates that a workload is frequently accessing data that isn't stored in the buffer pool. This wait event is associated with new page additions and old data evictions from the buffer pool. The data stored in the buffer pool aged and new data must be cached, so the aged pages are evicted to allow caching of the new pages. MySQL uses a least recently used (LRU) algorithm to evict pages from the buffer pool. The workload is trying to access data that hasn't been loaded into the buffer pool or data that has been evicted from the buffer pool.

This wait event occurs when the workload must access the data in files on disk or when blocks are freed from or added to the buffer pool's LRU list. These operations wait to obtain a shared excluded lock (SX-lock). This SX-lock is used for the synchronization over the *hash table*, which is a table in memory designed to improve buffer pool access performance.

For more information, see Buffer Pool in the MySQL documentation.

Likely causes of increased waits

When the `synch/sxlock/innodb/hash_table_locks` wait event appears more than normal, possibly indicating a performance problem, typical causes include the following:

An undersized buffer pool

The size of the buffer pool is too small to keep all of the frequently accessed pages in memory.

Heavy workload

The workload is causing frequent evictions and data pages reloads in the buffer cache.

Errors reading the pages

There are errors reading pages in the buffer pool, which might indicate data corruption.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Increase the size of the buffer pool
- Improve data access patterns
- Reduce or avoid full-table scans
- Check the error logs for page corruption

Increase the size of the buffer pool

Make sure that the buffer pool is appropriately sized for the workload. To do so, you can check the buffer pool cache hit rate. Typically, if the value drops below 95 percent, consider increasing the buffer pool size. A larger buffer pool can keep frequently accessed pages in memory longer. To increase the size of the buffer pool, modify the value of the `innodb_buffer_pool_size` parameter. The default value of this parameter is based on the DB instance class size. For more information, see Best practices for Amazon Aurora MySQL database configuration.

Improve data access patterns

Check the queries affected by this wait and their execution plans. Consider improving data access patterns. For example, if you are using mysqli_result::fetch_array, you can try increasing the array fetch size.

You can use Performance Insights to show queries and sessions that might be causing the `synch/sxlock/innodb/hash_table_locks` wait event.

To find SQL queries that are responsible for high load

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose a DB instance. The Performance Insights dashboard is shown for that DB instance.
4. In the **Database load** chart, choose **Slice by wait**.
5. Choose the **Top SQL** tab.

The chart lists the SQL queries that are responsible for the load. Those listed first are most responsible. To resolve a bottleneck, focus on these statements.

For a useful overview of troubleshooting using Performance Insights, see the Amazon Database Blog post Analyze Amazon Aurora MySQL Workloads with Performance Insights.

Reduce or avoid full-table scans

Monitor your workload to see if it's running full-table scans, and, if it is, reduce or avoid them. For example, you can monitor status variables such as `Handler_read_rnd_next`. For more information, see Server Status Variables in the MySQL documentation.

Check the error logs for page corruption

You can check the mysql-error.log for corruption-related messages that were detected near the time of the issue. Messages that you can work with to resolve the issue are in the error log. You might need to recreate objects that were reported as corrupted.

synch/mutex/innodb/temp_pool_manager_mutex

The `synch/mutex/innodb/temp_pool_manager_mutex` wait event occurs when a session is waiting to acquire a mutex for managing the pool of session temporary tablespaces.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for the following engine versions:

- Aurora MySQL version 3

Context

Aurora MySQL version 3.x and higher uses `temp_pool_manager_mutex` to control multiple sessions accessing the temporary tablespace pool at the same time. Aurora MySQL manages storage through an Aurora cluster volume for persistent data and local storage for temporary files. A temporary tablespace is needed when a session creates a temporary table on the Aurora cluster volume.

When a session first requests a temporary tablespace, MySQL allocates session temporary tablespaces from the shared pool. A session can hold up to 2 temporary tablespaces at a time for the following table types:

- User-created temporary tables
- Optimizer-generated internal temporary tables

The default `TempTable` engine uses the following overflow mechanism to handle temporary tables:

- Stores tables in RAM up to the `temptable_max_ram` limit.
- Moves to memory-mapped files on local storage when RAM is full.
- Uses the shared cluster volume when memory-mapped files reach their `temptable_max_mmap` limit.

After temporary tables exceed both RAM and local storage limits, MySQL manages them using on-disk tablespace.

When a session requires an on-disk temporary table, MySQL:

- Looks for available `INACTIVE` tablespaces in the pool to reuse.
- Creates 10 new tablespaces if no `INACTIVE` spaces exist.

When a session disconnects, MySQL:

- Truncates the session's temporary tablespaces.
- Marks them as INACTIVE in the pool for reuse.
- Maintains the current pool size until server restart.
- Returns to the default pool size (10 tablespaces) after restart.

Likely causes of increased waits

Common situations that cause this wait event:

- Concurrent sessions creating internal temporary tables on the cluster volume.
- Concurrent sessions creating user temporary tables on the cluster volume.
- Sudden termination of sessions using active tablespaces.
- Tablespace pool expansion during heavy write workloads.
- Concurrent queries accessing `INFORMATION_SCHEMA`.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Monitor and optimize temporary table usage
- Review queries using INFORMATION_SCHEMA
- Increase innodb_sync_array_size parameter
- Implement connection pooling

Monitor and optimize temporary table usage

To monitor and optimize temporary table usage, use one of these methods:

- Check the `Created_tmp_disk_tables` counter in Performance Insights to track on-disk temporary table creation across your Aurora cluster.
- Run this command in your database to directly monitor temporary table creation: `mysql> show status like '%created_tmp_disk%'`.

> **Note**
>
> Temporary table behavior differs between Aurora MySQL reader nodes and writer nodes. For more information, see New temporary table behavior in Aurora MySQL version 3.

After identifying queries creating temporary tables, take these optimization steps:

- Use `EXPLAIN` to examine query execution plans and identify where and why temporary tables are being created.
- Modify queries to reduce temporary table usage where possible.

If query optimization alone doesn't resolve performance issues, consider adjusting these configuration parameters:

- `temptable_max_ram`- Controls maximum RAM usage for temporary tables.
- `temptable_max_mmap` - Sets the limit for memory-mapped file storage.
- `tmp_table_size`- Applies when `aurora_tmptable_enable_per_table_limit` is enabled (disabled by default).

> **Important**
>
> Note that certain query conditions will always require on-disk temporary tables, regardless of configuration settings. For more information `TempTable` storage engine, see Use the TempTable storage engine on Amazon RDS for MySQL and Amazon Aurora MySQL .

Review queries using INFORMATION_SCHEMA

When you query `INFORMATION_SCHEMA` tables, MySQL creates InnoDB temporary tables on the cluster volume. Each session needs a temporary tablespace for these tables, which can lead to performance issues during high concurrent access.

To improve performance:

- Use `PERFORMANCE_SCHEMA` instead of `INFORMATION_SCHEMA` where possible.
- If you must use `INFORMATION_SCHEMA`, reduce how often you run these queries.

Increase innodb_sync_array_size parameter

The `innodb_sync_array_size` parameter controls the size of the mutex/lock wait array in MySQL. The default value of 1 works for general workloads, but increasing it can reduce thread contention during high concurrency.

When your workload shows increasing numbers of waiting threads:

- Monitor the number of waiting threads in your workload.
- Set `innodb_sync_array_size` equal to or higher than your instance's vCPU count to split the thread coordination structure and reduce contention.

> **Note**
>
> To determine the number of vCPUs available on your RDS instance, see the vCPU specifications in Amazon RDS instance types .

Implement connection pooling

MySQL assigns a dedicated tablespace to each session that creates a temporary table. This tablespace remains active until the database connection ends. To manage your resources more efficiently:

- Implement connection pooling to limit the number of active temporary tablespaces.
- Reuse existing connections instead of creating new ones for each operation.

Tuning Aurora MySQL with thread states

The following table summarizes the most common general thread states for Aurora MySQL.

General thread state	Description
???	This thread state indicates that a thread is processing a SELECT statement that requires the use of an internal temporary table to sort the data.
???	This thread state indicates that a thread is reading and filtering rows for a query to determine the correct result set.

creating sort index

The `creating sort index` thread state indicates that a thread is processing a SELECT statement that requires the use of an internal temporary table to sort the data.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This thread state information is supported for the following versions:

- Aurora MySQL version 2 up to 2.09.2

Context

The `creating sort index` state appears when a query with an ORDER BY or GROUP BY clause can't use an existing index to perform the operation. In this case, MySQL needs to perform a more

expensive `filesort` operation. This operation is typically performed in memory if the result set isn't too large. Otherwise, it involves creating a file on disk.

Likely causes of increased waits

The appearance of `creating sort index` doesn't by itself indicate a problem. If performance is poor, and you see frequent instances of `creating sort index`, the most likely cause is slow queries with `ORDER BY` or `GROUP BY` operators.

Actions

The general guideline is to find queries with `ORDER BY` or `GROUP BY` clauses that are associated with the increases in the `creating sort index` state. Then see whether adding an index or increasing the sort buffer size solves the problem.

Topics

- Turn on the Performance Schema if it isn't turned on
- Identify the problem queries
- Examine the explain plans for filesort usage
- Increase the sort buffer size

Turn on the Performance Schema if it isn't turned on

Performance Insights reports thread states only if Performance Schema instruments aren't turned on. When Performance Schema instruments are turned on, Performance Insights reports wait events instead. Performance Schema instruments provide additional insights and better tools when you investigate potential performance problems. Therefore, we recommend that you turn on the Performance Schema. For more information, see Overview of the Performance Schema for Database Insights in Aurora MySQL.

Identify the problem queries

To identify current queries that are causing increases in the `creating sort index` state, run `show processlist` and see if any of the queries have `ORDER BY` or `GROUP BY`. Optionally, run `explain for connection N`, where `N` is the process list ID of the query with `filesort`.

To identify past queries that are causing these increases, turn on the slow query log and find the queries with `ORDER BY`. Run `EXPLAIN` on the slow queries and look for "using filesort." For more information, see Examine the explain plans for filesort usage.

Examine the explain plans for filesort usage

Identify the statements with `ORDER BY` or `GROUP BY` clauses that result in the `creating sort index` state.

The following example shows how to run `explain` on a query. The `Extra` column shows that this query uses `filesort`.

```
mysql> explain select * from mytable order by c1 limit 10\G
*************************** 1. row ***************************
           id: 1
  select_type: SIMPLE
        table: mytable
   partitions: NULL
         type: ALL
possible_keys: NULL
          key: NULL
      key_len: NULL
          ref: NULL
         rows: 2064548
     filtered: 100.00
        Extra: Using filesort
1 row in set, 1 warning (0.01 sec)
```

The following example shows the result of running `EXPLAIN` on the same query after an index is created on column `c1`.

```
mysql> alter table mytable add index (c1);
```

```
mysql> explain select * from mytable order by c1 limit 10\G
*************************** 1. row ***************************
           id: 1
  select_type: SIMPLE
        table: mytable
   partitions: NULL
         type: index
possible_keys: NULL
          key: c1
      key_len: 1023
          ref: NULL
         rows: 10
```

```
     filtered: 100.00
        Extra: Using index
1 row in set, 1 warning (0.01 sec)
```

For information on using indexes for sort order optimization, see ORDER BY Optimization in the MySQL documentation.

Increase the sort buffer size

To see whether a specific query required a `filesort` process that created a file on disk, check the `sort_merge_passes` variable value after running the query. The following shows an example.

```
mysql> show session status like 'sort_merge_passes';
+-------------------+-------+
| Variable_name     | Value |
+-------------------+-------+
| Sort_merge_passes | 0     |
+-------------------+-------+
1 row in set (0.01 sec)

--- run query
mysql> select * from mytable order by u limit 10;
--- run status again:

mysql> show session status like 'sort_merge_passes';
+-------------------+-------+
| Variable_name     | Value |
+-------------------+-------+
| Sort_merge_passes | 0     |
+-------------------+-------+
1 row in set (0.01 sec)
```

If the value of `sort_merge_passes` is high, consider increasing the sort buffer size. Apply the increase at the session level, because increasing it globally can significantly increase the amount of RAM MySQL uses. The following example shows how to change the sort buffer size before running a query.

```
mysql> set session sort_buffer_size=10*1024*1024;
Query OK, 0 rows affected (0.00 sec)
-- run query
```

sending data

The `sending data` thread state indicates that a thread is reading and filtering rows for a query to determine the correct result set. The name is misleading because it implies the state is transferring data, not collecting and preparing data to be sent later.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This thread state information is supported for the following versions:

- Aurora MySQL version 2 up to 2.09.2

Context

Many thread states are short-lasting. Operations occurring during `sending data` tend to perform large numbers of disk or cache reads. Therefore, `sending data` is often the longest-running state over the lifetime of a given query. This state appears when Aurora MySQL is doing the following:

- Reading and processing rows for a `SELECT` statement
- Performing a large number of reads from either disk or memory
- Completing a full read of all data from a specific query
- Reading data from a table, an index, or the work of a stored procedure
- Sorting, grouping, or ordering data

After the `sending data` state finishes preparing the data, the thread state `writing to net` indicates the return of data to the client. Typically, `writing to net` is captured only when the result set is very large or severe network latency is slowing the transfer.

Likely causes of increased waits

The appearance of `sending data` doesn't by itself indicate a problem. If performance is poor, and you see frequent instances of `sending data`, the most likely causes are as follows.

Topics

- Inefficient query
- Suboptimal server configuration

Inefficient query

In most cases, what's responsible for this state is a query that isn't using an appropriate index to find the result set of a specific query. For example, consider a query reading a 10 million record table for all orders placed in California, where the state column isn't indexed or is poorly indexed. In the latter case, the index might exist, but the optimizer ignores it because of low cardinality.

Suboptimal server configuration

If several queries appear in the `sending data` state, the database server might be configured poorly. Specifically, the server might have the following issues:

- The database server doesn't have enough computing capacity: disk I/O, disk type and speed, CPU, or number of CPUs.
- The server is starved for allocated resources, such as the InnoDB buffer pool for InnoDB tables or the key buffer for MyIsam tables.
- Per-thread memory settings such as `sort_buffer`, `read_buffer`, and `join_buffer` consume more RAM than required, starving the physical server for memory resources.

Actions

The general guideline is to find queries that return large numbers of rows by checking the Performance Schema. If logging queries that don't use indexes is turned on, you can also examine the results from the slow logs.

Topics

- Turn on the Performance Schema if it isn't turned on
- Examine memory settings

- Examine the explain plans for index usage
- Check the volume of data returned
- Check for concurrency issues
- Check the structure of your queries

Turn on the Performance Schema if it isn't turned on

Performance Insights reports thread states only if Performance Schema instruments aren't turned on. When Performance Schema instruments are turned on, Performance Insights reports wait events instead. Performance Schema instruments provide additional insights and better tools when you investigate potential performance problems. Therefore, we recommend that you turn on the Performance Schema. For more information, see Overview of the Performance Schema for Database Insights in Aurora MySQL.

Examine memory settings

Examine the memory settings for the primary buffer pools. Make sure that these pools are appropriately sized for the workload. If your database uses multiple buffer pool instances, make sure that they aren't divided into many small buffer pools. Threads can only use one buffer pool at a time.

Make sure that the following memory settings used for each thread are properly sized:

- read_buffer
- read_rnd_buffer
- sort_buffer
- join_buffer
- binlog_cache

Unless you have a specific reason to modify the settings, use the default values.

Examine the explain plans for index usage

For queries in the `sending data` thread state, examine the plan to determine whether appropriate indexes are used. If a query isn't using a useful index, consider adding hints like `USE INDEX` or `FORCE INDEX`. Hints can greatly increase or decrease the time it takes to run a query, so use care before adding them.

Check the volume of data returned

Check the tables that are being queried and the amount of data that they contain. Can any of this data be archived? In many cases, the cause of poor query execution times isn't the result of the query plan, but the volume of data to be processed. Many developers are very efficient in adding data to a database but seldom consider dataset life cycle in the design and development phases.

Look for queries that perform well in low-volume databases but perform poorly in your current system. Sometimes developers who design specific queries might not realize that these queries are returning 350,000 rows. The developers might have developed the queries in a lower-volume environment with smaller datasets than production environments have.

Check for concurrency issues

Check whether multiple queries of the same type are running at the same time. Some forms of queries run efficiently when they run alone. However, if similar forms of query run together, or in high volume, they can cause concurrency issues. Often, these issues are caused when the database uses temp tables to render results. A restrictive transaction isolation level can also cause concurrency issues.

If tables are read and written to concurrently, the database might be using locks. To help identify periods of poor performance, examine the use of databases through large-scale batch processes. To see recent locks and rollbacks, examine the output of the `SHOW ENGINE INNODB STATUS` command.

Check the structure of your queries

Check whether captured queries from these states use subqueries. This type of query often leads to poor performance because the database compiles the results internally and then substitutes them back into the query to render data. This process is an extra step for the database. In many cases, this step can cause poor performance in a highly concurrent loading condition.

Also check whether your queries use large numbers of `ORDER BY` and `GROUP BY` clauses. In such operations, often the database must first form the entire dataset in memory. Then it must order or group it in a specific manner before returning it to the client.

Tuning Aurora MySQL with Amazon DevOps Guru proactive insights

DevOps Guru proactive insights detect known problematic conditions on your Aurora MySQL DB clusters before they occur. DevOps Guru can do the following:

- Prevent many common database issues by cross-checking your database configuration against common recommended settings.
- Alert you to critical issues in your fleet that, if left unchecked, can lead to larger problems later.
- Alert you to newly discovered problems.

Every proactive insight contains an analysis of the cause of the problem and recommendations for corrective actions.

Topics

- The InnoDB history list length increased significantly
- Database is creating temporary tables on disk

The InnoDB history list length increased significantly

Starting on *`date`*, your history list for row changes increased significantly, up to *`length`* on *`db-instance`*. This increase affects query and database shutdown performance.

Topics

- Supported engine versions
- Context
- Likely causes for this issue
- Actions
- Relevant metrics

Supported engine versions

This insight information is supported for all versions of Aurora MySQL.

Context

The InnoDB transaction system maintains multiversion concurrency control (MVCC). When a row is modified, the pre-modification version of the data being modified is stored as an undo record in an undo log. Every undo record has a reference to its previous redo record, forming a linked list.

The *InnoDB history list* is a global list of the undo logs for committed transactions. MySQL uses the history list to purge records and log pages when transactions no longer require the history.

The *history list length* is the total number of undo logs that contain modifications in the history list. Each log contains one or more modifications. If the InnoDB history list length grows too large, indicating a large number of old row versions, queries and database shutdowns become slower.

Likely causes for this issue

Typical causes of a long history list include the following:

- Long-running transactions, either read or write
- A heavy write load

Actions

We recommend different actions depending on the causes of your insight.

Topics

- Don't begin any operation involving a database shutdown until the InnoDB history list decreases
- Identify and end long-running transactions
- Identify the top hosts and top users by using Performance Insights.
- Use transaction timeout to prevent future occurrences

Don't begin any operation involving a database shutdown until the InnoDB history list decreases

Because a long InnoDB history list slows database shutdowns, reduce the list size before initiating operations involving a database shutdown. These operations include major version database upgrades.

Identify and end long-running transactions

You can find long-running transactions by querying `information_schema.innodb_trx`.

> **Note**
>
> Make sure also to look for long-running transactions on read replicas.

To identify and end long-running transactions

1. In your SQL client, run the following query:

```
SELECT a.trx_id,
      a.trx_state,
      a.trx_started,
      TIMESTAMPDIFF(SECOND,a.trx_started, now()) as "Seconds Transaction Has Been
 Open",
      a.trx_rows_modified,
      b.USER,
      b.host,
      b.db,
      b.command,
      b.time,
      b.state
FROM  information_schema.innodb_trx a,
      information_schema.processlist b
WHERE a.trx_mysql_thread_id=b.id
  AND TIMESTAMPDIFF(SECOND,a.trx_started, now()) > 10
ORDER BY trx_started
```

2. End each long-running transaction with the stored procedure mysql.rds_kill.

Identify the top hosts and top users by using Performance Insights.

Optimize transactions so that large numbers of modified rows are immediately committed.

Use transaction timeout to prevent future occurrences

To prevent long-running transactions from causing a large history list in the future, consider enabling the `aurora_transaction_timeout` parameter. This parameter automatically terminates transactions that exceed a specified duration. For more information, see Transaction timeout in Amazon Aurora MySQL.

Relevant metrics

The following metrics are related to this insight:

- `trx_rseg_history_len` – This counter metric can be viewed in Performance Insights, as well as the `INFORMATION_SCHEMA.INNODB_METRICS` table. For more information, see InnoDB INFORMATION_SCHEMA metrics table in the MySQL documentation.

- `RollbackSegmentHistoryListLength` – This Amazon CloudWatch metric measures the undo logs that record committed transactions with delete-marked records. These records are scheduled to be processed by the InnoDB purge operation. The metric `trx_rseg_history_len` has the same value as `RollbackSegmentHistoryListLength`.
- `PurgeBoundary` – The transaction number up to which InnoDB purging is allowed. If this CloudWatch metric doesn't advance for extended periods of time, it's a good indication that InnoDB purging is blocked by long-running transactions. To investigate, check the active transactions on your Aurora MySQL DB cluster. This metric is available only for Aurora MySQL version 2.11 and higher, and version 3.08 and higher.
- `PurgeFinishedPoint` – The transaction number up to which InnoDB purging is performed. This CloudWatch metric can help you examine how fast InnoDB purging is progressing. This metric is available only for Aurora MySQL version 2.11 and higher, and version 3.08 and higher.
- `TransactionAgeMaximum` – The age of the oldest active running transaction. This CloudWatch metric is available only for Aurora MySQL version 3.08 and higher.
- `TruncateFinishedPoint` – The transaction number up to which undo truncation is performed. This CloudWatch metric is available only for Aurora MySQL version 2.11 and higher, and version 3.08 and higher.

For more information on the CloudWatch metrics, see Instance-level metrics for Amazon Aurora.

Database is creating temporary tables on disk

Your recent on-disk temporary table usage increased significantly, up to *`percentage`*. The database is creating around *`number`* temporary tables per second. This might impact performance and increase disk operations on *`db-instance`*.

Topics

- Supported engine versions
- Context
- Likely causes for this issue
- Actions
- Relevant metrics

Supported engine versions

This insight information is supported for all versions of Aurora MySQL.

Context

Sometimes it's necessary for the MySQL server to create an internal temporary table while processing a query. Aurora MySQL can hold an internal temporary table in memory, where it can be processed by the TempTable or MEMORY storage engine, or stored on disk by InnoDB. For more information, see Internal Temporary Table Use in MySQL in the *MySQL Reference Manual*.

Likely causes for this issue

An increase in on-disk temporary tables indicates the use of complex queries. If the configured memory is insufficient to store temporary tables in memory, Aurora MySQL creates the tables on disk. This can impact performance and increase disk operations.

Actions

We recommend different actions depending on the causes of your insight.

- For Aurora MySQL version 3, we recommend that you use the TempTable storage engine.
- Optimize your queries to return less data by selecting only necessary columns.

  If you turn on the Performance Schema with all `statement` instruments enabled and timed, you can query `SYS.statements_with_temp_tables` to retrieve the list of queries that use temporary tables. For more information, see Prerequisites for Using the sys Schema in the MySQL documentation.
- Consider indexing columns that are involved in sorting and grouping operations.
- Rewrite your queries to avoid `BLOB` and `TEXT` columns. These columns always use disk.
- Tune the following database parameters: `tmp_table_size` and `max_heap_table_size`.

  The default values for these parameters is 16 MiB. When using the MEMORY storage engine for in-memory temporary tables, their maximum size is defined by the `tmp_table_size` or `max_heap_table_size` value, whichever is smaller. When this maximum size is reached, MySQL automatically converts the in-memory internal temporary table to an InnoDB on-disk internal temporary table. For more information, see Use the TempTable storage engine on Amazon RDS for MySQL and Amazon Aurora MySQL.

> **Note**
>
> When explicitly creating MEMORY tables with CREATE TABLE, only the `max_heap_table_size` variable determines how large a table can grow. There is also no conversion to an on-disk format.

Relevant metrics

The following detailed per-query and database counter metrics, exposed through the Performance Insights API, are related to this insight:

- Created_tmp_disk_tables
- Created_tmp_tables

For more information, see Created_tmp_disk_tables in the MySQL documentation.

Parallel query for Amazon Aurora MySQL

This topic describes the parallel query performance optimization for Amazon Aurora MySQL-Compatible Edition. This feature uses a special processing path for certain data-intensive queries, taking advantage of the Aurora shared storage architecture. Parallel query works best with Aurora MySQL DB clusters that have tables with millions of rows and analytic queries that take minutes or hours to complete.

Topics

- Overview of parallel query for Aurora MySQL
- Creating a parallel query DB cluster in Aurora MySQL
- Turning parallel query on and off in Aurora MySQL
- Optimizing parallel query in Aurora MySQL
- Verifying which statements use parallel query for Aurora MySQL
- Monitoring parallel query for Aurora MySQL
- SQL constructs for parallel query in Aurora MySQL

Overview of parallel query for Aurora MySQL

Aurora MySQL parallel query is an optimization that parallelizes some of the I/O and computation involved in processing data-intensive queries. The work that is parallelized includes retrieving rows from storage, extracting column values, and determining which rows match the conditions in the `WHERE` clause and join clauses. This data-intensive work is delegated (in database optimization terms, *pushed down*) to multiple nodes in the Aurora distributed storage layer. Without parallel query, each query brings all the scanned data to a single node within the Aurora MySQL cluster (the head node) and performs all the query processing there.

> **Tip**
>
> The PostgreSQL database engine also has a feature called "parallel query." That feature is unrelated to Aurora parallel query.

When the parallel query feature is turned on, the Aurora MySQL engine automatically determines when queries can benefit, without requiring SQL changes such as hints or table attributes. In the

following sections, you can find an explanation of when parallel query is applied to a query. You can also find how to make sure that parallel query is applied where it provides the most benefit.

> **Note**
>
> The parallel query optimization provides the most benefit for long-running queries that take minutes or hours to complete. Aurora MySQL generally doesn't perform parallel query optimization for inexpensive queries. It also generally doesn't perform parallel query optimization if another optimization technique makes more sense, such as query caching, buffer pool caching, or index lookups. If you find that parallel query isn't being used when you expect it, see Verifying which statements use parallel query for Aurora MySQL.

Topics

- Benefits
- Architecture
- Prerequisites
- Limitations
- I/O costs with parallel query

Benefits

With parallel query, you can run data-intensive analytic queries on Aurora MySQL tables. In many cases, you can get an order-of-magnitude performance improvement over the traditional division of labor for query processing.

Benefits of parallel query include the following:

- Improved I/O performance, due to parallelizing physical read requests across multiple storage nodes.
- Reduced network traffic. Aurora doesn't transmit entire data pages from storage nodes to the head node and then filter out unnecessary rows and columns afterward. Instead, Aurora transmits compact tuples containing only the column values needed for the result set.
- Reduced CPU usage on the head node, due to pushing down function processing, row filtering, and column projection for the `WHERE` clause.

- Reduced memory pressure on the buffer pool. The pages processed by the parallel query aren't added to the buffer pool. This approach reduces the chance of a data-intensive scan evicting frequently used data from the buffer pool.
- Potentially reduced data duplication in your extract, transform, load (ETL) pipeline, by making it practical to perform long-running analytic queries on existing data.

Architecture

The parallel query feature uses the major architectural principles of Aurora MySQL: decoupling the database engine from the storage subsystem, and reducing network traffic by streamlining communication protocols. Aurora MySQL uses these techniques to speed up write-intensive operations such as redo log processing. Parallel query applies the same principles to read operations.

> **Note**
>
> The architecture of Aurora MySQL parallel query differs from that of similarly named features in other database systems. Aurora MySQL parallel query doesn't involve symmetric multiprocessing (SMP) and so doesn't depend on the CPU capacity of the database server. The parallel processing happens in the storage layer, independent of the Aurora MySQL server that serves as the query coordinator.

By default, without parallel query, the processing for an Aurora query involves transmitting raw data to a single node within the Aurora cluster (the *head node*). Aurora then performs all further processing for that query in a single thread on that single node. With parallel query, much of this I/O-intensive and CPU-intensive work is delegated to nodes in the storage layer. Only the compact rows of the result set are transmitted back to the head node, with rows already filtered, and column values already extracted and transformed. The performance benefit comes from the reduction in network traffic, reduction in CPU usage on the head node, and parallelizing the I/O across the storage nodes. The amount of parallel I/O, filtering, and projection is independent of the number of DB instances in the Aurora cluster that runs the query.

Prerequisites

Using all features of parallel query requires an Aurora MySQL DB cluster that's running version 2.09 or higher. If you already have a cluster that you want to use with parallel query, you can upgrade it to a compatible version and turn on parallel query afterward. In that case, make sure to follow the

upgrade procedure in Upgrade considerations for parallel query because the configuration setting names and default values are different in these newer versions.

The DB instances in your cluster must use the `db.r*` instance classes.

Make sure that hash join optimization is turned on for your cluster. To learn how, see Turning on hash join for parallel query clusters.

To customize parameters such as `aurora_parallel_query` and `aurora_disable_hash_join`, you must have a custom parameter group that you use with your cluster. You can specify these parameters individually for each DB instance by using a DB parameter group. However, we recommend that you specify them in a DB cluster parameter group. That way, all DB instances in your cluster inherit the same settings for these parameters.

Limitations

The following limitations apply to the parallel query feature:

- Parallel query isn't supported with the Aurora I/O-Optimized DB cluster storage configuration.
- You can't use parallel query with the db.t2 or db.t3 instance classes. This limitation applies even if you request parallel query using the `aurora_pq_force` session variable.
- Parallel query doesn't apply to tables using the `COMPRESSED` or `REDUNDANT` row formats. Use the `COMPACT` or `DYNAMIC` row formats for tables you plan to use with parallel query.
- Aurora uses a cost-based algorithm to determine whether to use the parallel query mechanism for each SQL statement. Using certain SQL constructs in a statement can prevent parallel query or make parallel query unlikely for that statement. For information about compatibility of SQL constructs with parallel query, see SQL constructs for parallel query in Aurora MySQL.
- Each Aurora DB instance can run only a certain number of parallel query sessions at one time. If a query has multiple parts that use parallel query, such as subqueries, joins, or `UNION` operators, those phases run in sequence. The statement only counts as a single parallel query session at any one time. You can monitor the number of active sessions using the parallel query status variables. You can check the limit on concurrent sessions for a given DB instance by querying the status variable `Aurora_pq_max_concurrent_requests`.
- Parallel query is available in all Amazon Web Services Regions that Aurora supports. For most Amazon Web Services Regions, the minimum required Aurora MySQL version to use parallel query is 2.09.
- Parallel query is designed to improve the performance of data-intensive queries. It isn't designed for lightweight queries.

- We recommend that you use reader nodes for SELECT statements, especially data-intensive ones.

I/O costs with parallel query

If your Aurora MySQL cluster uses parallel query, you might see an increase in `VolumeReadIOPS` values. Parallel queries don't use the buffer pool. Thus, although the queries are fast, this optimized processing can result in an increase in read operations and associated charges.

Parallel query I/O costs for your query are metered at the storage layer, and will be the same or larger with parallel query turned on. Your benefit is the improvement in query performance. There are two reasons for potentially higher I/O costs with parallel query:

- Even if some of the data in a table is in the buffer pool, parallel query requires all data to be scanned at the storage layer, incurring I/O costs.
- Running a parallel query doesn't warm up the buffer pool. As a result, consecutive runs of the same parallel query incur the full I/O cost.

Creating a parallel query DB cluster in Aurora MySQL

To create an Aurora MySQL cluster with parallel query, add new instances to it, or perform other administrative operations, you use the same Amazon Web Services Management Console and Amazon CLI techniques that you do with other Aurora MySQL clusters. You can create a new cluster to work with parallel query. You can also create a DB cluster to work with parallel query by restoring from a snapshot of a MySQL-compatible Aurora DB cluster. If you aren't familiar with the process for creating a new Aurora MySQL cluster, you can find background information and prerequisites in Creating an Amazon Aurora DB cluster.

When you choose an Aurora MySQL engine version, we recommend that you choose the latest one available. Currently, all available Aurora MySQL versions support parallel query. You have more flexibility to turn parallel query on and off, or use parallel query with existing clusters, if you use the latest versions.

Whether you create a new cluster or restore from a snapshot, you use the same techniques to add new DB instances that you do with other Aurora MySQL clusters.

You can create a parallel query cluster using the Amazon RDS console or the Amazon CLI.

Contents

- Creating a parallel query cluster using the console
- Creating a parallel query cluster using the CLI

Creating a parallel query cluster using the console

You can create a new parallel query cluster with the console as described following.

To create a parallel query cluster with the Amazon Web Services Management Console

1. Follow the general Amazon Web Services Management Console procedure in Creating an Amazon Aurora DB cluster.
2. For **Engine type**, choose Aurora MySQL.
3. For **Additional configuration**, choose a parameter group that you created for **DB cluster parameter group**. Using such a custom parameter group is required for Aurora MySQL 2.09 and higher. In your DB cluster parameter group, specify the parameter settings `aurora_parallel_query=ON` and `aurora_disable_hash_join=OFF`. Doing so turns on parallel query for the cluster, and turns on the hash join optimization that works in combination with parallel query.

To verify that a new cluster can use parallel query

1. Create a cluster using the preceding technique.
2. (For Aurora MySQL version 2, version 3, or version 8.4) Check that the `aurora_parallel_query` configuration setting is true.

```
mysql> select @@aurora_parallel_query;
+-------------------------+
| @@aurora_parallel_query |
+-------------------------+
|                       1 |
+-------------------------+
```

3. (For Aurora MySQL version 2) Check that the `aurora_disable_hash_join` setting is false.

```
mysql> select @@aurora_disable_hash_join;
+----------------------------+
| @@aurora_disable_hash_join |
+----------------------------+
```

```
|                            0 |
+------------------------------+
```

4. With some large tables and data-intensive queries, check the query plans to confirm that some of your queries are using the parallel query optimization. To do so, follow the procedure in Verifying which statements use parallel query for Aurora MySQL.

Creating a parallel query cluster using the CLI

You can create a new parallel query cluster with the CLI as described following.

To create a parallel query cluster with the Amazon CLI

1. (Optional) Check which Aurora MySQL versions are compatible with parallel query clusters. To do so, use the `describe-db-engine-versions` command and check the value of the `SupportsParallelQuery` field. For an example, see Checking Aurora MySQL version compatibility for parallel query.
2. (Optional) Create a custom DB cluster parameter group with the settings `aurora_parallel_query=ON` and `aurora_disable_hash_join=OFF`. Use commands such as the following.

```
aws rds create-db-cluster-parameter-group --db-parameter-group-family aurora-
mysql8.0 --db-cluster-parameter-group-name pq-enabled-80-compatible
aws rds modify-db-cluster-parameter-group --db-cluster-parameter-group-name pq-
enabled-80-compatible \
  --parameters
 ParameterName=aurora_parallel_query,ParameterValue=ON,ApplyMethod=pending-reboot
aws rds modify-db-cluster-parameter-group --db-cluster-parameter-group-name pq-
enabled-80-compatible \
  --parameters
 ParameterName=aurora_disable_hash_join,ParameterValue=OFF,ApplyMethod=pending-
reboot
```

   If you perform this step, specify the option `--db-cluster-parameter-group-name` *`my_cluster_parameter_group`* in the subsequent `create-db-cluster` statement. Substitute the name of your own parameter group. If you omit this step, you create the parameter group and associate it with the cluster later, as described in Turning parallel query on and off in Aurora MySQL.
3. Follow the general Amazon CLI procedure in Creating an Amazon Aurora DB cluster.

4. Specify the following set of options:

   - For the `--engine` option, use `aurora-mysql`. These values produce parallel query clusters that are compatible with MySQL 5.7 or 8.0.
   - For the `--db-cluster-parameter-group-name` option, specify the name of a DB cluster parameter group that you created and specified the parameter value `aurora_parallel_query=ON`. If you omit this option, you can create the cluster with a default parameter group and later modify it to use such a custom parameter group.
   - For the `--engine-version` option, use an Aurora MySQL version that's compatible with parallel query. Use the procedure from Optimizing parallel query in Aurora MySQL to get a list of versions if necessary.

     The following code example shows how. Substitute your own value for each of the environment variables such as *$CLUSTER_ID*. This example also specifies the `--manage-master-user-password` option to generate the master user password and manage it in Secrets Manager. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager. Alternatively, you can use the `--master-password` option to specify and manage the password yourself.

```
aws rds create-db-cluster --db-cluster-identifier $CLUSTER_ID \
  --engine aurora-mysql --engine-version 8.0.mysql_aurora.3.04.1 \
  --master-username $MASTER_USER_ID --manage-master-user-password \
  --db-cluster-parameter-group-name $CUSTOM_CLUSTER_PARAM_GROUP

aws rds create-db-instance --db-instance-identifier ${INSTANCE_ID}-1 \
  --engine same_value_as_in_create_cluster_command \
  --db-cluster-identifier $CLUSTER_ID --db-instance-class $INSTANCE_CLASS
```

5. Verify that a cluster you created or restored has the parallel query feature available.

   Check that the `aurora_parallel_query` configuration setting exists. If this setting has the value 1, parallel query is ready for you to use. If this setting has the value 0, set it to 1 before you can use parallel query. Either way, the cluster is capable of performing parallel queries.

```
mysql> select @@aurora_parallel_query;
+------------------------+
| @@aurora_parallel_query|
+------------------------+
|                      1 |
```

```
+------------------------+
```

To restore a snapshot to a parallel query cluster with the Amazon CLI

1. Check which Aurora MySQL versions are compatible with parallel query clusters. To do so, use the `describe-db-engine-versions` command and check the value of the `SupportsParallelQuery` field. For an example, see Checking Aurora MySQL version compatibility for parallel query. Decide which version to use for the restored cluster.
2. Locate an Aurora MySQL-compatible cluster snapshot.
3. Follow the general Amazon CLI procedure in Restoring from a DB cluster snapshot.

```
aws rds restore-db-cluster-from-snapshot \
  --db-cluster-identifier mynewdbcluster \
  --snapshot-identifier mydbclustersnapshot \
  --engine aurora-mysql
```

4. Verify that a cluster you created or restored has the parallel query feature available. Use the same verification procedure as in Creating a parallel query cluster using the CLI.

Turning parallel query on and off in Aurora MySQL

When parallel query is turned on, Aurora MySQL determines whether to use it at runtime for each query. In the case of joins, unions, subqueries, and so on, Aurora MySQL determines whether to use parallel query at runtime for each query block. For details, see Verifying which statements use parallel query for Aurora MySQL and SQL constructs for parallel query in Aurora MySQL.

You can turn on and turn off parallel query dynamically at both the global and session level for a DB instance by using the **aurora_parallel_query** option. You can change the `aurora_parallel_query` setting in your DB cluster group to turn parallel query on or off by default.

```
mysql> select @@aurora_parallel_query;
+------------------------+
| @@aurora_parallel_query|
+------------------------+
|                      1 |
+------------------------+
```

To toggle the `aurora_parallel_query` parameter at the session level, use the standard methods to change a client configuration setting. For example, you can do so through the `mysql` command line or within a JDBC or ODBC application. The command on the standard MySQL client is `set session aurora_parallel_query = {'ON'/'OFF'}`. You can also add the session-level parameter to the JDBC configuration or within your application code to turn on or turn off parallel query dynamically.

You can permanently change the setting for the `aurora_parallel_query` parameter, either for a specific DB instance or for your whole cluster. If you specify the parameter value in a DB parameter group, that value only applies to specific DB instance in your cluster. If you specify the parameter value in a DB cluster parameter group, all DB instances in the cluster inherit the same setting. To toggle the `aurora_parallel_query` parameter, use the techniques for working with parameter groups, as described in Parameter groups for Amazon Aurora. Follow these steps:

1. Create a custom cluster parameter group (recommended) or a custom DB parameter group.
2. In this parameter group, update `parallel_query` to the value that you want.
3. Depending on whether you created a DB cluster parameter group or a DB parameter group, attach the parameter group to your Aurora cluster or to the specific DB instances where you plan to use the parallel query feature.

> **Tip**
>
> Because `aurora_parallel_query` is a dynamic parameter, it doesn't require a cluster restart after changing this setting. However, any connections that were using parallel query before toggling the option will continue to do so until the connection is closed, or the instance is rebooted.

You can modify the parallel query parameter by using the ModifyDBClusterParameterGroup or ModifyDBParameterGroup API operation or the Amazon Web Services Management Console.

You can turn on hash join for parallel query clusters, turn parallel query on and off using the Amazon RDS console or the Amazon CLI, and override the parallel query optimizer.

Contents

- Turning on hash join for parallel query clusters
- Turning on and turning off parallel query using the console

- Turning on and turning off parallel query using the CLI
- Overriding the parallel query optimizer

Turning on hash join for parallel query clusters

Parallel query is typically used for the kinds of resource-intensive queries that benefit from the hash join optimization. Thus, it's helpful to make sure that hash joins are turned on for clusters where you plan to use parallel query. For information about how to use hash joins effectively, see Optimizing large Aurora MySQL join queries with hash joins.

Turning on and turning off parallel query using the console

You can turn on or turn off parallel query at the DB instance level or the DB cluster level by working with parameter groups.

To turn on or turn off parallel query for a DB cluster with the Amazon Web Services Management Console

1. Create a custom parameter group, as described in Parameter groups for Amazon Aurora.
2. Update **aurora_parallel_query** to **1** (turned on) or **0** (turned off). For clusters where the parallel query feature is available, **aurora_parallel_query** is turned off by default.
3. If you use a custom cluster parameter group, attach it to the Aurora DB cluster where you plan to use the parallel query feature. If you use a custom DB parameter group, attach it to one or more DB instances in the cluster. We recommend using a cluster parameter group. Doing so makes sure that all DB instances in the cluster have the same settings for parallel query and associated features such as hash join.

Turning on and turning off parallel query using the CLI

You can modify the parallel query parameter by using the `modify-db-cluster-parameter-group` or `modify-db-parameter-group` command. Choose the appropriate command depending on whether you specify the value of `aurora_parallel_query` through a DB cluster parameter group or a DB parameter group.

To turn on or turn off parallel query for a DB cluster with the CLI

- Modify the parallel query parameter by using the `modify-db-cluster-parameter-group` command. Use a command such as the following. Substitute the appropriate name for your

own custom parameter group. Substitute either `ON` or `OFF` for the `ParameterValue` portion of the `--parameters` option.

```
$ aws rds modify-db-cluster-parameter-group --db-cluster-parameter-group-
name cluster_param_group_name \
  --parameters
 ParameterName=aurora_parallel_query,ParameterValue=ON,ApplyMethod=pending-reboot
{
    "DBClusterParameterGroupName": "cluster_param_group_name"
}

aws rds modify-db-cluster-parameter-group --db-cluster-parameter-group-
name cluster_param_group_name \
  --parameters ParameterName=aurora_pq,ParameterValue=ON,ApplyMethod=pending-reboot
```

You can also turn on or turn off parallel query at the session level, for example through the `mysql` command line or within a JDBC or ODBC application. To do so, use the standard methods to change a client configuration setting. For example, the command on the standard MySQL client is `set session aurora_parallel_query = {'ON'/'OFF'}` for Aurora MySQL.

You can also add the session-level parameter to the JDBC configuration or within your application code to turn on or turn off parallel query dynamically.

Overriding the parallel query optimizer

You can use the `aurora_pq_force` session variable to override the parallel query optimizer and request parallel query for every query. We recommend that you do this only for testing purposes The following example shows how to use `aurora_pq_force` in a session.

```
set SESSION aurora_parallel_query = ON;
set SESSION aurora_pq_force = ON;
```

To turn off the override, do the following:

```
set SESSION aurora_pq_force = OFF;
```

Optimizing parallel query in Aurora MySQL

To optimize your DB cluster for parallel query, consider which DB clusters would benefit from parallel query and whether to upgrade for parallel query. Then, tune your workload and create schema objects for parallel query.

Contents

- Planning for a parallel query cluster
  - Checking Aurora MySQL version compatibility for parallel query
- Upgrade considerations for parallel query
  - Upgrading parallel query clusters to Aurora MySQL version 3
  - Upgrading to Aurora MySQL 2.09 and higher
- Performance tuning for parallel query
- Creating schema objects to take advantage of parallel query

Planning for a parallel query cluster

Planning for a DB cluster that has parallel query turned on requires making some choices. These include performing setup steps (either creating or restoring a full Aurora MySQL cluster) and deciding how broadly to turn on parallel query across your DB cluster.

Consider the following as part of planning:

- If you use Aurora MySQL that's compatible with MySQL 5.7, you must create a provisioned cluster. Then you turn on parallel query using the `aurora_parallel_query` parameter.

  If you have an existing Aurora MySQL cluster, you don't have to create a new cluster to use parallel query. You can associate your cluster, or specific DB instances in the cluster, with a parameter group that has the `aurora_parallel_query` parameter turned on. By doing so, you can reduce the time and effort to set up the relevant data to use with parallel query.
- Plan for any large tables that you need to reorganize so that you can use parallel query when accessing them. You might need to create new versions of some large tables where parallel query is useful. For example, you might need to remove full-text search indexes. For details, see Creating schema objects to take advantage of parallel query.

Checking Aurora MySQL version compatibility for parallel query

To check which Aurora MySQL versions are compatible with parallel query clusters, use the `describe-db-engine-versions` Amazon CLI command and check the value of the `SupportsParallelQuery` field. The following code example shows how to check which combinations are available for parallel query clusters in a specified Amazon Region. Make sure to specify the full `--query` parameter string on a single line.

```
aws rds describe-db-engine-versions --region us-east-1 --engine aurora-mysql \
--query '*[]|[?SupportsParallelQuery == `true`].[EngineVersion]' --output text
```

The preceding commands produce output similar to the following. The output might vary depending on which Aurora MySQL versions are available in the specified Amazon Region.

```
5.7.mysql_aurora.2.11.1
5.7.mysql_aurora.2.11.2
5.7.mysql_aurora.2.11.3
5.7.mysql_aurora.2.11.4
5.7.mysql_aurora.2.11.5
5.7.mysql_aurora.2.11.6
5.7.mysql_aurora.2.12.0
5.7.mysql_aurora.2.12.1
5.7.mysql_aurora.2.12.2
5.7.mysql_aurora.2.12.3
5.7.mysql_aurora.2.12.4
8.0.mysql_aurora.3.04.0
8.0.mysql_aurora.3.04.1
8.0.mysql_aurora.3.04.2
8.0.mysql_aurora.3.04.3
8.0.mysql_aurora.3.05.2
8.0.mysql_aurora.3.06.0
8.0.mysql_aurora.3.06.1
8.0.mysql_aurora.3.07.0
8.0.mysql_aurora.3.07.1
```

After you start using parallel query with a cluster, you can monitor performance and remove obstacles to parallel query usage. For those instructions, see Performance tuning for parallel query.

Upgrade considerations for parallel query

Depending on the original and destination versions when you upgrade a parallel query cluster, you might find enhancements in the types of queries that parallel query can optimize. You might

also find that you don't need to specify a special engine mode parameter for parallel query. The following sections explain the considerations when you upgrade a cluster that has parallel query turned on.

Upgrading parallel query clusters to Aurora MySQL version 3

Several SQL statements, clauses, and data types have new or improved parallel query support starting in Aurora MySQL version 3. When you upgrade from a release that's earlier than version 3, check whether additional queries can benefit from parallel query optimizations. For information about these parallel query enhancements, see Column data types, Partitioned tables, and Aggregate functions, GROUP BY clauses, and HAVING clauses.

If you're upgrading a parallel query cluster from Aurora MySQL 2.08 or lower, also learn about changes in how to turn on parallel query. To do so, read Upgrading to Aurora MySQL 2.09 and higher.

In Aurora MySQL version 3, hash join optimization is turned on by default. The `aurora_disable_hash_join` configuration option from earlier versions isn't used.

Upgrading to Aurora MySQL 2.09 and higher

In Aurora MySQL version 2.09 and higher, parallel query works for provisioned clusters and doesn't require the `parallelquery` engine mode parameter. Thus, you don't need to create a new cluster or restore from an existing snapshot to use parallel query with these versions. You can use the upgrade procedures described in Upgrading the minor version or patch level of an Aurora MySQL DB cluster to upgrade your cluster to such a version. You can upgrade an older cluster regardless of whether it was a parallel query cluster or a provisioned cluster. To reduce the number of choices in the **Engine version** menu, you can choose **Show versions that support the parallel query feature** to filter the entries in that menu. Then choose Aurora MySQL 2.09 or higher.

After you upgrade an earlier parallel query cluster to Aurora MySQL 2.09 or higher, you turn on parallel query in the upgraded cluster. Parallel query is turned off by default in these versions, and the procedure for enabling it is different. The hash join optimization is also turned off by default and must be turned on separately. Thus, make sure that you turn on these settings again after the upgrade. For instructions on doing so, see Turning parallel query on and off in Aurora MySQL and Turning on hash join for parallel query clusters.

In particular, you turn on parallel query by using the configuration parameters `aurora_parallel_query=ON` and `aurora_disable_hash_join=OFF` instead of

`aurora_pq_supported` and `aurora_pq`. The `aurora_pq_supported` and `aurora_pq` parameters are deprecated in the newer Aurora MySQL versions.

In the upgraded cluster, the `EngineMode` attribute has the value `provisioned` instead of `parallelquery`. To check whether parallel query is available for a specified engine version, now you check the value of the `SupportsParallelQuery` field in the output of the `describe-db-engine-versions` Amazon CLI command. In earlier Aurora MySQL versions, you checked for the presence of `parallelquery` in the `SupportedEngineModes` list.

After you upgrade to Aurora MySQL version 2.09 or higher, you can take advantage of the following features. These features aren't available to parallel query clusters running older Aurora MySQL versions.

- Performance Insights. For more information, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.
- Backtracking. For more information, see Backtracking an Aurora DB cluster.
- Stopping and starting the cluster. For more information, see Stopping and starting an Amazon Aurora DB cluster.

Performance tuning for parallel query

To manage the performance of a workload with parallel query, make sure that parallel query is used for the queries where this optimization helps the most.

To do so, you can do the following:

- Make sure that your biggest tables are compatible with parallel query. You might change table properties or recreate some tables so that queries for those tables can take advantage of the parallel query optimization. To learn how, see Creating schema objects to take advantage of parallel query.
- Monitor which queries use parallel query. To learn how, see Monitoring parallel query for Aurora MySQL.
- Verify that parallel query is being used for the most data-intensive and long-running queries, and with the right level of concurrency for your workload. To learn how, see Verifying which statements use parallel query for Aurora MySQL.
- Fine-tune your SQL code to turn on parallel query to apply to the queries that you expect. To learn how, see SQL constructs for parallel query in Aurora MySQL.

Creating schema objects to take advantage of parallel query

Before you create or modify tables that you plan to use for parallel query, make sure to familiarize yourself with the requirements described in Prerequisites and Limitations.

Because parallel query requires tables to use the `ROW_FORMAT=Compact` or `ROW_FORMAT=Dynamic` setting, check your Aurora configuration settings for any changes to the `INNODB_FILE_FORMAT` configuration option. Issue the `SHOW TABLE STATUS` statement to confirm the row format for all the tables in a database.

Before changing your schema to turn on parallel query to work with more tables, make sure to test. Your tests should confirm if parallel query results in a net increase in performance for those tables. Also, make sure that the schema requirements for parallel query are otherwise compatible with your goals.

For example, before switching from `ROW_FORMAT=Compressed` to `ROW_FORMAT=Compact` or `ROW_FORMAT=Dynamic`, test the performance of workloads for the original and new tables. Also, consider other potential effects such as increased data volume.

Verifying which statements use parallel query for Aurora MySQL

In typical operation, you don't need to perform any special actions to take advantage of parallel query. After a query meets the essential requirements for parallel query, the query optimizer automatically decides whether to use parallel query for each specific query.

If you run experiments in a development or test environment, you might find that parallel query isn't used because your tables are too small in number of rows or overall data volume. The data for the table might also be entirely in the buffer pool, especially for tables that you created recently to perform experiments.

As you monitor or tune cluster performance, make sure to decide whether parallel query is being used in the appropriate contexts. You might adjust the database schema, settings, SQL queries, or even the cluster topology and application connection settings to take advantage of this feature.

To check if a query is using parallel query, check the query plan (also known as the "explain plan") by running the EXPLAIN statement. For examples of how SQL statements, clauses, and expressions affect `EXPLAIN` output for parallel query, see SQL constructs for parallel query in Aurora MySQL.

The following example demonstrates the difference between a traditional query plan and a parallel query plan. This explain plan is from Query 3 from the TPC-H benchmark. Many of the sample

queries throughout this section use the tables from the TPC-H dataset. You can get the table definitions, queries, and the dbgen program that generates sample data from the TPC-h website.

```
EXPLAIN SELECT l_orderkey,
  sum(l_extendedprice * (1 - l_discount)) AS revenue,
  o_orderdate,
  o_shippriority
FROM customer,
  orders,
  lineitem
WHERE c_mktsegment = 'AUTOMOBILE'
AND c_custkey = o_custkey
AND l_orderkey = o_orderkey
AND o_orderdate < date '1995-03-13'
AND l_shipdate > date '1995-03-13'
GROUP BY l_orderkey,
  o_orderdate,
  o_shippriority
ORDER BY revenue DESC,
  o_orderdate LIMIT 10;
```

By default, the query might have a plan like the following. If you don't see hash join used in the query plan, make sure that optimization is turned on first.

```
+----+-------------+----------+------------+------+---------------+------+---------
+------+----------+----------+----------------------------------------------------+
| id | select_type | table    | partitions | type | possible_keys | key  | key_len |
 ref  | rows     | filtered | Extra                                              |
+----+-------------+----------+------------+------+---------------+------+---------
+------+----------+----------+----------------------------------------------------+
|  1 | SIMPLE      | customer | NULL       | ALL  | NULL          | NULL | NULL    |
 NULL |  1480234 |    10.00 | Using where; Using temporary; Using filesort       |
|  1 | SIMPLE      | orders   | NULL       | ALL  | NULL          | NULL | NULL    |
 NULL | 14875240 |     3.33 | Using where; Using join buffer (Block Nested Loop) |
|  1 | SIMPLE      | lineitem | NULL       | ALL  | NULL          | NULL | NULL    |
 NULL | 59270573 |     3.33 | Using where; Using join buffer (Block Nested Loop) |
+----+-------------+----------+------------+------+---------------+------+---------
+------+----------+----------+----------------------------------------------------+
```

For Aurora MySQL version 3, you turn on hash join at the session level by issuing the following statement.

```
SET optimizer_switch='block_nested_loop=on';
```

For Aurora MySQL version 2.09 and higher, you set the `aurora_disable_hash_join` DB parameter or DB cluster parameter to `0` (off). Turning off `aurora_disable_hash_join` sets the value of `optimizer_switch` to `hash_join=on`.

After you turn on hash join, try running the `EXPLAIN` statement again. For information about how to use hash joins effectively, see Optimizing large Aurora MySQL join queries with hash joins.

With hash join turned on but parallel query turned off, the query might have a plan like the following, which uses hash join but not parallel query.

```
+----+-------------+----------+...+-----------
+-------------------------------------------------------------------+
| id | select_type | table    |...| rows      | Extra
                          |
+----+-------------+----------+...+-----------
+-------------------------------------------------------------------+
|  1 | SIMPLE      | customer |...|   5798330 | Using where; Using index; Using
 temporary; Using filesort       |
|  1 | SIMPLE      | orders   |...| 154545408 | Using where; Using join buffer (Hash
 Join Outer table orders)   |
|  1 | SIMPLE      | lineitem |...| 606119300 | Using where; Using join buffer (Hash
 Join Outer table lineitem) |
+----+-------------+----------+...+-----------
+-------------------------------------------------------------------+
```

After parallel query is turned on, two steps in this query plan can use the parallel query optimization, as shown under the `Extra` column in the `EXPLAIN` output. The I/O-intensive and CPU-intensive processing for those steps is pushed down to the storage layer.

```
+----+...
+-------------------------------------------------------------------------------------------------
+
| id |...| Extra
                                                    |
+----+...
+-------------------------------------------------------------------------------------------------
+
|  1 |...| Using where; Using index; Using temporary; Using filesort
                                                    |
```

```
|  1 |...| Using where; Using join buffer (Hash Join Outer table orders); Using
 parallel query (4 columns, 1 filters, 1 exprs; 0 extra)   |
|  1 |...| Using where; Using join buffer (Hash Join Outer table lineitem); Using
 parallel query (4 columns, 1 filters, 1 exprs; 0 extra) |
+----+...
+-----------------------------------------------------------------------------------------------
+
```

For information about how to interpret EXPLAIN output for a parallel query and the parts of SQL statements that parallel query can apply to, see SQL constructs for parallel query in Aurora MySQL.

The following example output shows the results of running the preceding query on a db.r4.2xlarge instance with a cold buffer pool. The query runs substantially faster when using parallel query.

> **Note**
>
> Because timings depend on many environmental factors, your results might be different. Always conduct your own performance tests to confirm the findings with your own environment, workload, and so on.

```
-- Without parallel query
+------------+-------------+-------------+----------------+
| l_orderkey | revenue     | o_orderdate | o_shippriority |
+------------+-------------+-------------+----------------+
|   92511430 | 514726.4896 | 1995-03-06  |              0 |
.
.
|   28840519 | 454748.2485 | 1995-03-08  |              0 |
+------------+-------------+-------------+----------------+
10 rows in set (24 min 49.99 sec)
```

```
-- With parallel query
+------------+-------------+-------------+----------------+
| l_orderkey | revenue     | o_orderdate | o_shippriority |
+------------+-------------+-------------+----------------+
|   92511430 | 514726.4896 | 1995-03-06  |              0 |
.
.
|   28840519 | 454748.2485 | 1995-03-08  |              0 |
+------------+-------------+-------------+----------------+
```

```
10 rows in set (1 min 49.91 sec)
```

Many of the sample queries throughout this section use the tables from this TPC-H dataset, particularly the PART table, which has 20 million rows and the following definition.

```
+---------------+---------------+------+-----+---------+-------+
| Field         | Type          | Null | Key | Default | Extra |
+---------------+---------------+------+-----+---------+-------+
| p_partkey     | int(11)       | NO   | PRI | NULL    |       |
| p_name        | varchar(55)   | NO   |     | NULL    |       |
| p_mfgr        | char(25)      | NO   |     | NULL    |       |
| p_brand       | char(10)      | NO   |     | NULL    |       |
| p_type        | varchar(25)   | NO   |     | NULL    |       |
| p_size        | int(11)       | NO   |     | NULL    |       |
| p_container   | char(10)      | NO   |     | NULL    |       |
| p_retailprice | decimal(15,2) | NO   |     | NULL    |       |
| p_comment     | varchar(23)   | NO   |     | NULL    |       |
+---------------+---------------+------+-----+---------+-------+
```

Experiment with your workload to get a sense of whether individual SQL statements can take advantage of parallel query. Then use the following monitoring techniques to help verify how often parallel query is used in real workloads over time. For real workloads, extra factors such as concurrency limits apply.

Monitoring parallel query for Aurora MySQL

If your Aurora MySQL cluster uses parallel query, you might see an increase in `VolumeReadIOPS` values. Parallel queries don't use the buffer pool. Thus, although the queries are fast, this optimized processing can result in an increase in read operations and associated charges.

In addition to the Amazon CloudWatch metrics described in Viewing metrics in the Amazon RDS console, Aurora provides other global status variables. You can use these global status variables to help monitor parallel query execution. They can give you insights into why the optimizer might use or not use parallel query in a given situation. To access these variables, you can use the `SHOW GLOBAL STATUS` command. You can also find these variables listed following.

A parallel query session isn't necessarily a one-to-one mapping with the queries performed by the database. For example, suppose that your query plan has two steps that use parallel query. In that case, the query involves two parallel sessions and the counters for requests attempted and requests successful are incremented by two.

When you experiment with parallel query by issuing `EXPLAIN` statements, expect to see increases in the counters designated as "not chosen" even though the queries aren't actually running. When you work with parallel query in production, you can check if the "not chosen" counters are increasing faster than you expect. At this point, you can adjust so that parallel query runs for the queries that you expect. To do so, you can change your cluster settings, query mix, DB instances where parallel query is turned on, and so on.

These counters are tracked at the DB instance level. When you connect to a different endpoint, you might see different metrics because each DB instance runs its own set of parallel queries. You might also see different metrics when the reader endpoint connects to a different DB instance for each session.

Name	Description
`Aurora_pq_bytes_returned`	The number of bytes for the tuple data structures transmitted to the head node during parallel queries. Divide by 16,384 to compare against `Aurora_pq_pages_pushed_down` .
`Aurora_pq_max_concurrent_requests`	The maximum number of parallel query sessions that can run concurrently on this Aurora DB instance. This is a fixed number that depends on the Amazon DB instance class.
`Aurora_pq_pages_pushed_down`	The number of data pages (each with a fixed size of 16 KiB) where parallel query avoided a network transmission to the head node.
`Aurora_pq_request_attempted`	The number of parallel query sessions requested. This value might represent more than one session per query, depending on SQL constructs such as subqueries and joins.
`Aurora_pq_request_executed`	The number of parallel query sessions run successfully.
`Aurora_pq_request_failed`	The number of parallel query sessions that returned an error to the client. In some cases,

Name	Description
	a request for a parallel query might fail, for example due to a problem in the storage layer. In these cases, the query part that failed is retried using the nonparallel query mechanism . If the retried query also fails, an error is returned to the client and this counter is incremented.
`Aurora_pq_request_in_progress`	The number of parallel query sessions currently in progress. This number applies to the particular Aurora DB instance that you are connected to, not the entire Aurora DB cluster. To see if a DB instance is close to its concurrency limit, compare this value to `Aurora_pq_max_concurrent_requests` .
`Aurora_pq_request_not_chosen`	The number of times parallel query wasn't chosen to satisfy a query. This value is the sum of several other more granular counters. An `EXPLAIN` statement can increment this counter even though the query isn't actually performed.
`Aurora_pq_request_not_chosen_below_min_rows`	The number of times parallel query wasn't chosen due to the number of rows in the table. An `EXPLAIN` statement can increment this counter even though the query isn't actually performed.
`Aurora_pq_request_not_chosen_column_bit`	The number of parallel query requests that use the nonparallel query processing path because of an unsupported data type in the list of projected columns.

Name	Description
Aurora_pq_request_not_chosen_column_geometry	The number of parallel query requests that use the nonparallel query processing path because the table has columns with the GEOMETRY data type. For information about Aurora MySQL versions that remove this limitation, see Upgrading parallel query clusters to Aurora MySQL version 3.
Aurora_pq_request_not_chosen_column_lob	The number of parallel query requests that use the nonparallel query processing path because the table has columns with a LOB data type, or VARCHAR columns that are stored externally due to the declared length. For information about Aurora MySQL versions that remove this limitation, see Upgrading parallel query clusters to Aurora MySQL version 3.
Aurora_pq_request_not_chosen_column_virtual	The number of parallel query requests that use the nonparallel query processing path because the table contains a virtual column.
Aurora_pq_request_not_chosen_custom_charset	The number of parallel query requests that use the nonparallel query processing path because the table has columns with a custom character set.
Aurora_pq_request_not_chosen_fast_ddl	The number of parallel query requests that use the nonparallel query processing path because the table is currently being altered by a fast DDL ALTER statement.

Name	Description
Aurora_pq_request_not_chosen_ few_pages_outside_buffer_pool	The number of times parallel query wasn't chosen, even though less than 95 percent of the table data was in the buffer pool, because there wasn't enough unbuffered table data to make parallel query worthwhile.
Aurora_pq_request_not_chose n_full_text_index	The number of parallel query requests that use the nonparallel query processing path because the table has full-text indexes.
Aurora_pq_request_not_chosen_ high_buffer_pool_pct	The number of times parallel query wasn't chosen because a high percentage of the table data (currently, greater than 95 percent) was already in the buffer pool. In these cases, the optimizer determines that reading the data from the buffer pool is more efficient . An EXPLAIN statement can increment this counter even though the query isn't actually performed.
Aurora_pq_request_not_chose n_index_hint	The number of parallel query requests that use the nonparallel query processing path because the query includes an index hint.
Aurora_pq_request_not_chose n_innodb_table_format	The number of parallel query requests that use the nonparallel query processing path because the table uses an unsupported InnoDB row format. Aurora parallel query only applies to the COMPACT, REDUNDANT , and DYNAMIC row formats.

Name	Description
Aurora_pq_request_not_chosen_long_trx	The number of parallel query requests that used the nonparallel query processing path, due to the query being started inside a long-running transaction. An EXPLAIN statement can increment this counter even though the query isn't actually performed.
Aurora_pq_request_not_chosen_no_where_clause	The number of parallel query requests that use the nonparallel query processing path because the query doesn't include any WHERE clause.
Aurora_pq_request_not_chosen_range_scan	The number of parallel query requests that use the nonparallel query processing path because the query uses a range scan on an index.
Aurora_pq_request_not_chosen_row_length_too_long	The number of parallel query requests that use the nonparallel query processing path because the total combined length of all the columns is too long.
Aurora_pq_request_not_chosen_small_table	The number of times parallel query wasn't chosen due to the overall size of the table, as determined by number of rows and average row length. An EXPLAIN statement can increment this counter even though the query isn't actually performed.
Aurora_pq_request_not_chosen_temporary_table	The number of parallel query requests that use the nonparallel query processing path because the query refers to temporary tables that use the unsupported MyISAM or memory table types.

Name	Description
`Aurora_pq_request_not_chosen_tx_isolation`	The number of parallel query requests that use the nonparallel query processing path because query uses an unsupported transaction isolation level. On reader DB instances, parallel query only applies to the `REPEATABLE READ` and `READ COMMITTED` isolation levels.
`Aurora_pq_request_not_chosen_update_delete_stmts`	The number of parallel query requests that use the nonparallel query processing path because the query is part of an `UPDATE` or `DELETE` statement.
`Aurora_pq_request_not_chosen_unsupported_access`	The number of parallel query requests that use the nonparallel query processing path because the `WHERE` clause doesn't meet the criteria for parallel query. This result can occur if the query doesn't require a data-intensive scan, or if the query is a `DELETE` or `UPDATE` statement.
`Aurora_pq_request_not_chosen_unsupported_storage_type`	The number of parallel query requests that use the nonparallel query processing path because the Aurora MySQL DB cluster isn't using a supported Aurora cluster storage configuration. This parameter is available in Aurora MySQL version 3.04 and higher. For more information, see Limitations.
`Aurora_pq_request_throttled`	The number of times parallel query wasn't chosen due to the maximum number of concurrent parallel queries already running on a particular Aurora DB instance.

SQL constructs for parallel query in Aurora MySQL

In the following section, you can find more detail about why particular SQL statements use or don't use parallel query. This section also details how Aurora MySQL features interact with parallel query. This information can help you diagnose performance issues for a cluster that uses parallel query or understand how parallel query applies for your particular workload.

The decision to use parallel query relies on many factors that occur at the moment that the statement runs. Thus, parallel query might be used for certain queries always, never, or only under certain conditions.

> **Tip**
>
> When you view these examples in HTML, you can use the **Copy** widget on each code listing to copy the SQL code to try yourself. Using the **Copy** widget avoids copying the extra characters around the `mysql>` prompt and `->` continuation lines.

Topics

- EXPLAIN statement
- WHERE clause
- Data definition language (DDL)
- Column data types
- Partitioned tables
- Aggregate functions, GROUP BY clauses, and HAVING clauses
- Function calls in WHERE clause
- LIMIT clause
- Comparison operators
- Joins
- Subqueries
- UNION
- Views
- Data manipulation language (DML) statements

- Transactions and locking
- B-tree indexes
- Full-text search (FTS) indexes
- Virtual columns
- Built-in caching mechanisms
- Optimizer hints
- MyISAM temporary tables

EXPLAIN statement

As shown in examples throughout this section, the `EXPLAIN` statement indicates whether each stage of a query is currently eligible for parallel query. It also indicates which aspects of a query can be pushed down to the storage layer. The most important items in the query plan are the following:

- A value other than `NULL` for the `key` column suggests that the query can be performed efficiently using index lookups, and parallel query is unlikely.
- A small value for the `rows` column (a value not in the millions) suggests that the query isn't accessing enough data to make parallel query worthwhile. This means that parallel query is unlikely.
- The `Extra` column shows you if parallel query is expected to be used. This output looks like the following example.

  ```
  Using parallel query (A columns, B filters, C exprs; D extra)
  ```

  The `columns` number represents how many columns are referred to in the query block.

  The `filters` number represents the number of `WHERE` predicates representing a simple comparison of a column value to a constant. The comparison can be for equality, inequality, or a range. Aurora can parallelize these kinds of predicates most effectively.

  The `exprs` number represents the number of expressions such as function calls, operators, or other expressions that can also be parallelized, though not as effectively as a filter condition.

  The `extra` number represents how many expressions can't be pushed down and are performed by the head node.

For example, consider the following EXPLAIN output.

```
mysql> explain select p_name, p_mfgr from part
    -> where p_brand is not null
    -> and upper(p_type) is not null
    -> and round(p_retailprice) is not null;
+----+-------------+-------+...+----------
+-------------------------------------------------------------------------------+
| id | select_type | table |...| rows     | Extra
                                |
+----+-------------+-------+...+----------
+-------------------------------------------------------------------------------+
|  1 | SIMPLE      | part  |...| 20427936 | Using where; Using parallel query (5
 columns, 1 filters, 2 exprs; 0 extra) |
+----+-------------+-------+...+----------
+-------------------------------------------------------------------------------+
```

The information from the Extra column shows that five columns are extracted from each row to evaluate the query conditions and construct the result set. One WHERE predicate involves a filter, that is, a column that is directly tested in the WHERE clause. Two WHERE clauses require evaluating more complicated expressions, in this case involving function calls. The 0 extra field confirms that all the operations in the WHERE clause are pushed down to the storage layer as part of parallel query processing.

In cases where parallel query isn't chosen, you can typically deduce the reason from the other columns of the EXPLAIN output. For example, the rows value might be too small, or the possible_keys column might indicate that the query can use an index lookup instead of a data-intensive scan. The following example shows a query where the optimizer can estimate that the query will scan only a small number of rows. It does so based on the characteristics of the primary key. In this case, parallel query isn't required.

```
mysql> explain select count(*) from part where p_partkey between 1 and 100;
+----+-------------+-------+-------+---------------+---------+---------+------+------
+--------------------------+
| id | select_type | table | type  | possible_keys | key     | key_len | ref  | rows |
 Extra                    |
+----+-------------+-------+-------+---------------+---------+---------+------+------
+--------------------------+
|  1 | SIMPLE      | part  | range | PRIMARY       | PRIMARY | 4       | NULL |   99 |
 Using where; Using index |
```

```
+----+-------------+-------+-------+---------------+---------+---------+------+------
+--------------------------+
```

The output showing whether parallel query will be used takes into account all available factors at the moment that the EXPLAIN statement is run. The optimizer might make a different choice when the query is actually run, if the situation changed in the meantime. For example, EXPLAIN might report that a statement will use parallel query. But when the query is actually run later, it might not use parallel query based on the conditions then. Such conditions can include several other parallel queries running concurrently. They can also include rows being deleted from the table, a new index being created, too much time passing within an open transaction, and so on.

WHERE clause

For a query to use the parallel query optimization, it *must* include a WHERE clause.

The parallel query optimization speeds up many kinds of expressions used in the WHERE clause:

- Simple comparisons of a column value to a constant, known as *filters*. These comparisons benefit the most from being pushed down to the storage layer. The number of filter expressions in a query is reported in the EXPLAIN output.
- Other kinds of expressions in the WHERE clause are also pushed down to the storage layer where possible. The number of such expressions in a query is reported in the EXPLAIN output. These expressions can be function calls, LIKE operators, CASE expressions, and so on.
- Certain functions and operators aren't currently pushed down by parallel query. The number of such expressions in a query is reported as the extra counter in the EXPLAIN output. The rest of the query can still use parallel query.
- While expressions in the select list aren't pushed down, queries containing such functions can still benefit from reduced network traffic for the intermediate results of parallel queries. For example, queries that call aggregation functions in the select list can benefit from parallel query, even though the aggregation functions aren't pushed down.

For example, the following query does a full-table scan and processes all the values for the P_BRAND column. However, it doesn't use parallel query because the query doesn't include any WHERE clause.

```
mysql> explain select count(*), p_brand from part group by p_brand;
+----+-------------+-------+------+---------------+------+---------+------+----------
+--------------------------------+
```

```
| id | select_type | table | type | possible_keys | key  | key_len | ref  | rows     |
 Extra                          |
+----+-------------+-------+------+---------------+------+---------+------+----------
+--------------------------------+
|  1 | SIMPLE      | part  | ALL  | NULL          | NULL | NULL    | NULL | 20427936 |
 Using temporary; Using filesort |
+----+-------------+-------+------+---------------+------+---------+------+----------
+--------------------------------+
```

In contrast, the following query includes `WHERE` predicates that filter the results, so parallel query can be applied:

```
mysql> explain select count(*), p_brand from part where p_name is not null
    ->   and p_mfgr in ('Manufacturer#1', 'Manufacturer#3') and p_retailprice > 1000
    -> group by p_brand;
+----+...+----------
+-------------------------------------------------------------------------------------------------------
+
| id |...| rows     | Extra
                                          |
+----+...+----------
+-------------------------------------------------------------------------------------------------------
+
|  1 |...| 20427936 | Using where; Using temporary; Using filesort; Using parallel
 query (5 columns, 1 filters, 2 exprs; 0 extra) |
+----+...+----------
+-------------------------------------------------------------------------------------------------------
+
```

If the optimizer estimates that the number of returned rows for a query block is small, parallel query isn't used for that query block. The following example shows a case where a greater-than operator on the primary key column applies to millions of rows, which causes parallel query to be used. The converse less-than test is estimated to apply to only a few rows and doesn't use parallel query.

```
mysql> explain select count(*) from part where p_partkey > 10;
+----+...+----------
+-------------------------------------------------------------------------+
| id |...| rows     | Extra
          |
+----+...+----------
+-------------------------------------------------------------------------+
```

```
|  1 |...| 20427936 | Using where; Using parallel query (1 columns, 1 filters, 0 exprs;
 0 extra) |
+----+...+----------
+-------------------------------------------------------------------------+

mysql> explain select count(*) from part where p_partkey < 10;
+----+...+------+-------------------------+
| id |...| rows | Extra                   |
+----+...+------+-------------------------+
|  1 |...|    9 | Using where; Using index |
+----+...+------+-------------------------+
```

Data definition language (DDL)

In Aurora MySQL version 2, parallel query is only available for tables for which no fast data definition language (DDL) operations are pending. In Aurora MySQL version 3, you can use parallel query on a table at the same time as an instant DDL operation.

Instant DDL in Aurora MySQL version 3 replaces the fast DDL feature in Aurora MySQL version 2. For information about instant DDL, see Instant DDL (Aurora MySQL version 3 and version 8.4).

Column data types

In Aurora MySQL version 3, parallel query can work with tables containing columns with data types `TEXT`, `BLOB`, `JSON`, and `GEOMETRY`. It can also work with `VARCHAR` and `CHAR` columns with a maximum declared length longer than 768 bytes. If your query refers to any columns containing such large object types, the additional work to retrieve them does add some overhead to query processing. In that case, check if the query can omit the references to those columns. If not, run benchmarks to confirm if such queries are faster with parallel query turned on or turned off.

In Aurora MySQL version 2, parallel query has these limitations for large object types:

- `TEXT`, `BLOB`, `JSON`, and `GEOMETRY` data types aren't supported with parallel query. A query that refers to any columns of these types can't use parallel query.
- Variable-length columns (`VARCHAR` and `CHAR` data types) are compatible with parallel query up to a maximum declared length of 768 bytes. A query that refers to any columns of the types declared with a longer maximum length can't use parallel query. For columns that use multibyte character sets, the byte limit takes into account the maximum number of bytes in the character set. For example, for the character set `utf8mb4` (which has a maximum character length of 4

bytes), a `VARCHAR(192)` column is compatible with parallel query but a `VARCHAR(193)` column isn't.

Partitioned tables

You can use partitioned tables with parallel query in Aurora MySQL version 3. Because partitioned tables are represented internally as multiple smaller tables, a query that uses parallel query on a nonpartitioned table might not use parallel query on an identical partitioned table. Aurora MySQL considers whether each partition is large enough to qualify for the parallel query optimization, instead of evaluating the size of the entire table. Check whether the `Aurora_pq_request_not_chosen_small_table` status variable is incremented if a query on a partitioned table doesn't use parallel query when you expect it to.

For example, consider one table partitioned with `PARTITION BY HASH (`*`column`*`) PARTITIONS 2` and another table partitioned with `PARTITION BY HASH (`*`column`*`) PARTITIONS 10`. In the table with two partitititions, the partitions are five times as large as the table with ten partitions. Thus, parallel query is more likely to be used for queries against the table with fewer partitions. In the following example, the table `PART_BIG_PARTITIONS` has two partitions and `PART_SMALL_PARTITIONS` has ten partitions. With identical data, parallel query is more likely to be used for the table with fewer big partitions.

```
mysql> explain select count(*), p_brand from part_big_partitions where p_name is not
 null
    ->   and p_mfgr in ('Manufacturer#1', 'Manufacturer#3') and p_retailprice > 1000
 group by p_brand;
+----+-------------+--------------------+------------
+-------------------------------------------------------------------------------------
+
| id | select_type | table              | partitions | Extra
                                                                                    |
+----+-------------+--------------------+------------
+-------------------------------------------------------------------------------------
+
|  1 | SIMPLE      | part_big_partitions | p0,p1      | Using where; Using temporary;
 Using parallel query (4 columns, 1 filters, 1 exprs; 0 extra; 1 group-bys, 1 aggrs) |
+----+-------------+--------------------+------------
+-------------------------------------------------------------------------------------
+
```

```
mysql> explain select count(*), p_brand from part_small_partitions where p_name is not
 null
    ->   and p_mfgr in ('Manufacturer#1', 'Manufacturer#3') and p_retailprice > 1000
 group by p_brand;
+----+-------------+----------------------+------------------------------
+------------------------------+
| id | select_type | table                | partitions                   | Extra
                  |
+----+-------------+----------------------+------------------------------
+------------------------------+
|  1 | SIMPLE      | part_small_partitions | p0,p1,p2,p3,p4,p5,p6,p7,p8,p9 | Using
 where; Using temporary |
+----+-------------+----------------------+------------------------------
+------------------------------+
```

Aggregate functions, GROUP BY clauses, and HAVING clauses

Queries involving aggregate functions are often good candidates for parallel query, because they involve scanning large numbers of rows within large tables.

In Aurora MySQL 3, parallel query can optimize aggregate function calls in the select list and the `HAVING` clause.

Before Aurora MySQL 3, aggregate function calls in the select list or the `HAVING` clause aren't pushed down to the storage layer. However, parallel query can still improve the performance of such queries with aggregate functions. It does so by first extracting column values from the raw data pages in parallel at the storage layer. It then transmits those values back to the head node in a compact tuple format instead of as entire data pages. As always, the query requires at least one `WHERE` predicate for parallel query to be activated.

The following simple examples illustrate the kinds of aggregate queries that can benefit from parallel query. They do so by returning intermediate results in compact form to the head node, filtering nonmatching rows from the intermediate results, or both.

```
mysql> explain select sql_no_cache count(distinct p_brand) from part where p_mfgr =
 'Manufacturer#5';
+----+...+-------------------------------------------------------------------------+
| id |...| Extra                                                                   |
+----+...+-------------------------------------------------------------------------+
|  1 |...| Using where; Using parallel query (2 columns, 1 filters, 0 exprs; 0 extra) |
+----+...+-------------------------------------------------------------------------+
```

```
mysql> explain select sql_no_cache p_mfgr from part where p_retailprice > 1000 group by
 p_mfgr having count(*) > 100;
+----+...
+-------------------------------------------------------------------------------------------
+
| id |...| Extra
                                  |
+----+...
+-------------------------------------------------------------------------------------------
+
|  1 |...| Using where; Using temporary; Using filesort; Using parallel query (3
 columns, 0 filters, 1 exprs; 0 extra) |
+----+...
+-------------------------------------------------------------------------------------------
+
```

Function calls in WHERE clause

Aurora can apply the parallel query optimization to calls to most built-in functions in the `WHERE` clause. Parallelizing these function calls offloads some CPU work from the head node. Evaluating the predicate functions in parallel during the earliest query stage helps Aurora minimize the amount of data transmitted and processed during later stages.

Currently, the parallelization doesn't apply to function calls in the select list. Those functions are evaluated by the head node, even if identical function calls appear in the `WHERE` clause. The original values from relevant columns are included in the tuples transmitted from the storage nodes back to the head node. The head node performs any transformations such as `UPPER`, `CONCATENATE`, and so on to produce the final values for the result set.

In the following example, parallel query parallelizes the call to `LOWER` because it appears in the `WHERE` clause. Parallel query doesn't affect the calls to `SUBSTR` and `UPPER` because they appear in the select list.

```
mysql> explain select sql_no_cache distinct substr(upper(p_name),1,5) from part
    -> where lower(p_name) like '%cornflower%' or lower(p_name) like '%goldenrod%';
+----+...
+-------------------------------------------------------------------------------------------
+
| id |...| Extra
                |
```

```
+----+...
+-------------------------------------------------------------------------------------------
+
|  1 |...| Using where; Using temporary; Using parallel query (2 columns, 0 filters, 1
 exprs; 0 extra) |
+----+...
+-------------------------------------------------------------------------------------------
+
```

The same considerations apply to other expressions, such as CASE expressions or LIKE operators. For example, the following example shows that parallel query evaluates the CASE expression and LIKE operators in the WHERE clause.

```
mysql> explain select p_mfgr, p_retailprice from part
    -> where p_retailprice > case p_mfgr
    ->   when 'Manufacturer#1' then 1000
    ->   when 'Manufacturer#2' then 1200
    ->   else 950
    -> end
    -> and p_name like '%vanilla%'
    -> group by p_retailprice;
+----+...
+-------------------------------------------------------------------------------------------
+
| id |...| Extra
                                  |
+----+...
+-------------------------------------------------------------------------------------------
+
|  1 |...| Using where; Using temporary; Using filesort; Using parallel query (4
 columns, 0 filters, 2 exprs; 0 extra) |
+----+...
+-------------------------------------------------------------------------------------------
+
```

LIMIT clause

Currently, parallel query isn't used for any query block that includes a LIMIT clause. Parallel query might still be used for earlier query phases with GROUP by, ORDER BY, or joins.

Comparison operators

The optimizer estimates how many rows to scan to evaluate comparison operators, and determines whether to use parallel query based on that estimate.

The first example following shows that an equality comparison against the primary key column can be performed efficiently without parallel query. The second example following shows that a similar comparison against an unindexed column requires scanning millions of rows and therefore can benefit from parallel query.

```
mysql> explain select * from part where p_partkey = 10;
+----+...+------+-------+
| id |...| rows | Extra |
+----+...+------+-------+
|  1 |...|    1 | NULL  |
+----+...+------+-------+

mysql> explain select * from part where p_type = 'LARGE BRUSHED BRASS';
+----+...+----------
+-------------------------------------------------------------------------------+
| id |...| rows     | Extra
          |
+----+...+----------
+-------------------------------------------------------------------------------+
|  1 |...| 20427936 | Using where; Using parallel query (9 columns, 1 filters, 0 exprs;
 0 extra) |
+----+...+----------
+-------------------------------------------------------------------------------+
```

The same considerations apply for not-equals tests and for range comparisons such as less than, greater than or equal to, or `BETWEEN`. The optimizer estimates the number of rows to scan, and determines whether parallel query is worthwhile based on the overall volume of I/O.

Joins

Join queries with large tables typically involve data-intensive operations that benefit from the parallel query optimization. The comparisons of column values between multiple tables (that is, the join predicates themselves) currently aren't parallelized. However, parallel query can push down some of the internal processing for other join phases, such as constructing the Bloom filter during a hash join. Parallel query can apply to join queries even without a `WHERE` clause. Therefore, a join query is an exception to the rule that a `WHERE` clause is required to use parallel query.

Each phase of join processing is evaluated to check if it is eligible for parallel query. If more than one phase can use parallel query, these phases are performed in sequence. Thus, each join query counts as a single parallel query session in terms of concurrency limits.

For example, when a join query includes `WHERE` predicates to filter the rows from one of the joined tables, that filtering option can use parallel query. As another example, suppose that a join query uses the hash join mechanism, for example to join a big table with a small table. In this case, the table scan to produce the Bloom filter data structure might be able to use parallel query.

> **Note**
>
> Parallel query is typically used for the kinds of resource-intensive queries that benefit from the hash join optimization. The method for turning on the hash join optimization depends on the Aurora MySQL version. For details for each version, see Turning on hash join for parallel query clusters. For information about how to use hash joins effectively, see Optimizing large Aurora MySQL join queries with hash joins.

```
mysql> explain select count(*) from orders join customer where o_custkey = c_custkey;
+----+...+----------+------+--------------+-------------+...+-----------
+-------------------------------------------------------------------------------------------------
+
| id |...| table    | type  | possible_keys | key         |...| rows      | Extra

              |
+----+...+----------+------+--------------+-------------+...+-----------
+-------------------------------------------------------------------------------------------------
+
|  1 |...| customer | index | PRIMARY       | c_nationkey |...|  15051972 | Using index

              |
|  1 |...| orders   | ALL   | o_custkey     | NULL        |...| 154545408 | Using join
 buffer (Hash Join Outer table orders); Using parallel query (1 columns, 0 filters, 1
 exprs; 0 extra) |
+----+...+----------+------+--------------+-------------+...+-----------
+-------------------------------------------------------------------------------------------------
+
```

For a join query that uses the nested loop mechanism, the outermost nested loop block might use parallel query. The use of parallel query depends on the same factors as usual, such as the presence of additional filter conditions in the WHERE clause.

```
mysql> -- Nested loop join with extra filter conditions can use parallel query.
mysql> explain select count(*) from part, partsupp where p_partkey != ps_partkey and
 p_name is not null and ps_availqty > 0;
+----+-------------+----------+...+----------
+-------------------------------------------------------------------------------+
| id | select_type | table    |...| rows     | Extra
                                  |
+----+-------------+----------+...+----------
+-------------------------------------------------------------------------------+
|  1 | SIMPLE      | part     |...| 20427936 | Using where; Using parallel query (2
 columns, 1 filters, 0 exprs; 0 extra) |
|  1 | SIMPLE      | partsupp |...| 78164450 | Using where; Using join buffer (Block
 Nested Loop)                       |
+----+-------------+----------+...+----------
+-------------------------------------------------------------------------------+
```

Subqueries

The outer query block and inner subquery block might each use parallel query, or not. Whether they do is based on the usual characteristics of the table, WHERE clause, and so on, for each block. For example, the following query uses parallel query for the subquery block but not the outer block.

```
mysql> explain select count(*) from part where
   --> p_partkey < (select max(p_partkey) from part where p_name like '%vanilla%');
+----+-------------+...+----------
+-------------------------------------------------------------------------------+
| id | select_type |...| rows     | Extra
                       |
+----+-------------+...+----------
+-------------------------------------------------------------------------------+
|  1 | PRIMARY     |...|     NULL | Impossible WHERE noticed after reading const tables
                        |
|  2 | SUBQUERY    |...| 20427936 | Using where; Using parallel query (2 columns, 0
 filters, 1 exprs; 0 extra) |
+----+-------------+...+----------
+-------------------------------------------------------------------------------+
```

Currently, correlated subqueries can't use the parallel query optimization.

UNION

Each query block in a `UNION` query can use parallel query, or not, based on the usual characteristics of the table, `WHERE` clause, and so on, for each part of the `UNION`.

```
mysql> explain select p_partkey from part where p_name like '%choco_ate%'
    -> union select p_partkey from part where p_name like '%vanil_a%';
+----+---------------+...+----------
+-------------------------------------------------------------------------------+
| id | select_type    |...| rows     | Extra
                          |
+----+---------------+...+----------
+-------------------------------------------------------------------------------+
|  1 | PRIMARY        |...| 20427936 | Using where; Using parallel query (2 columns, 0
 filters, 1 exprs; 0 extra) |
|  2 | UNION          |...| 20427936 | Using where; Using parallel query (2 columns, 0
 filters, 1 exprs; 0 extra) |
| NULL | UNION RESULT | <union1,2> |...|     NULL | Using temporary
                        |
+----+--------------+...+----------
+-------------------------------------------------------------------------------+
```

> **Note**
>
> Each `UNION` clause within the query is run sequentially. Even if the query includes multiple stages that all use parallel query, it only runs a single parallel query at any one time. Therefore, even a complex multistage query only counts as 1 toward the limit of concurrent parallel queries.

Views

The optimizer rewrites any query using a view as a longer query using the underlying tables. Thus, parallel query works the same whether table references are views or real tables. All the same considerations about whether to use parallel query for a query, and which parts are pushed down, apply to the final rewritten query.

For example, the following query plan shows a view definition that usually doesn't use parallel query. When the view is queried with additional `WHERE` clauses, Aurora MySQL uses parallel query.

```
mysql> create view part_view as select * from part;
mysql> explain select count(*) from part_view where p_partkey is not null;
+----+...+----------
+-------------------------------------------------------------------------------+
| id |...| rows     | Extra
          |
+----+...+----------
+-------------------------------------------------------------------------------+
|  1 |...| 20427936 | Using where; Using parallel query (1 columns, 0 filters, 0 exprs;
 1 extra) |
+----+...+----------
+-------------------------------------------------------------------------------+
```

Data manipulation language (DML) statements

The INSERT statement can use parallel query for the SELECT phase of processing, if the SELECT part meets the other conditions for parallel query.

```
mysql> create table part_subset like part;
mysql> explain insert into part_subset select * from part where p_mfgr =
 'Manufacturer#1';
+----+...+----------
+-------------------------------------------------------------------------------+
| id |...| rows     | Extra
          |
+----+...+----------
+-------------------------------------------------------------------------------+
|  1 |...| 20427936 | Using where; Using parallel query (9 columns, 1 filters, 0 exprs;
 0 extra) |
+----+...+----------
+-------------------------------------------------------------------------------+
```

> **Note**
>
> Typically, after an INSERT statement, the data for the newly inserted rows is in the buffer pool. Therefore, a table might not be eligible for parallel query immediately after inserting a large number of rows. Later, after the data is evicted from the buffer pool during normal operation, queries against the table might begin using parallel query again.

The CREATE TABLE AS SELECT statement doesn't use parallel query, even if the SELECT portion of the statement would otherwise be eligible for parallel query. The DDL aspect of this statement makes it incompatible with parallel query processing. In contrast, in the INSERT ... SELECT statement, the SELECT portion can use parallel query.

Parallel query is never used for DELETE or UPDATE statements, regardless of the size of the table and predicates in the WHERE clause.

```
mysql> explain delete from part where p_name is not null;
+----+-------------+...+----------+-------------+
| id | select_type |...| rows     | Extra       |
+----+-------------+...+----------+-------------+
|  1 | SIMPLE      |...| 20427936 | Using where |
+----+-------------+...+----------+-------------+
```

Transactions and locking

You can use all the isolation levels on the Aurora primary instance.

On Aurora reader DB instances, parallel query applies to statements performed under the REPEATABLE READ isolation level. Aurora MySQL version 2.09 or higher can also use the READ COMMITTED isolation level on reader DB instances. REPEATABLE READ is the default isolation level for Aurora reader DB instances. To use READ COMMITTED isolation level on reader DB instances requires setting the aurora_read_replica_read_committed configuration option at the session level. The READ COMMITTED isolation level for reader instances complies with SQL standard behavior. However, the isolation is less strict on reader instances than when queries use READ COMMITTED isolation level on the writer instance.

For more information about Aurora isolation levels, especially the differences in READ COMMITTED between writer and reader instances, see Aurora MySQL isolation levels.

After a big transaction is finished, the table statistics might be stale. Such stale statistics might require an ANALYZE TABLE statement before Aurora can accurately estimate the number of rows. A large-scale DML statement might also bring a substantial portion of the table data into the buffer pool. Having this data in the buffer pool can lead to parallel query being chosen less frequently for that table until the data is evicted from the pool.

When your session is inside a long-running transaction (by default, 10 minutes), further queries inside that session don't use parallel query. A timeout can also occur during a single long-running

query. This type of timeout might happen if the query runs for longer than the maximum interval (currently 10 minutes) before the parallel query processing starts.

You can reduce the chance of starting long-running transactions accidentally by setting `autocommit=1` in `mysql` sessions where you perform ad hoc (one-time) queries. Even a `SELECT` statement against a table begins a transaction by creating a read view. A *read view* is a consistent set of data for subsequent queries that remains until the transaction is committed. Be aware of this restriction also when using JDBC or ODBC applications with Aurora, because such applications might run with the `autocommit` setting turned off.

The following example shows how, with the `autocommit` setting turned off, running a query against a table creates a read view that implicitly begins a transaction. Queries that are run shortly afterward can still use parallel query. However, after a pause of several minutes, queries are no longer eligible for parallel query. Ending the transaction with `COMMIT` or `ROLLBACK` restores parallel query eligibility.

```
mysql> set autocommit=0;

mysql> explain select sql_no_cache count(*) from part where p_retailprice > 10.0;
+----+...+---------
+-------------------------------------------------------------------------------+
| id |...| rows    | Extra
         |
+----+...+---------
+-------------------------------------------------------------------------------+
|  1 |...| 2976129 | Using where; Using parallel query (1 columns, 1 filters, 0 exprs;
 0 extra) |
+----+...+---------
+-------------------------------------------------------------------------------+

mysql> select sleep(720); explain select sql_no_cache count(*) from part where
 p_retailprice > 10.0;
+------------+
| sleep(720) |
+------------+
|          0 |
+------------+
1 row in set (12 min 0.00 sec)

+----+...+---------+-------------+
| id |...| rows    | Extra       |
+----+...+---------+-------------+
```

```
|  1 |...| 2976129 | Using where |
+----+...+---------+-------------+

mysql> commit;

mysql> explain select sql_no_cache count(*) from part where p_retailprice > 10.0;
+----+...+---------
+-------------------------------------------------------------------------------+
| id |...| rows    | Extra
         |
+----+...+---------
+-------------------------------------------------------------------------------+
|  1 |...| 2976129 | Using where; Using parallel query (1 columns, 1 filters, 0 exprs;
 0 extra) |
+----+...+---------
+-------------------------------------------------------------------------------+
```

To see how many times queries weren't eligible for parallel query because they were inside long-running transactions, check the status variable `Aurora_pq_request_not_chosen_long_trx`.

```
mysql> show global status like '%pq%trx%';
+---------------------------------------+-------+
| Variable_name                         | Value |
+---------------------------------------+-------+
| Aurora_pq_request_not_chosen_long_trx | 4     |
+-------------------------------+-------+
```

Any `SELECT` statement that acquires locks, such as the `SELECT FOR UPDATE` or `SELECT LOCK IN SHARE MODE` syntax, can't use parallel query.

Parallel query can work for a table that is locked by a `LOCK TABLES` statement.

```
mysql> explain select o_orderpriority, o_shippriority from orders where o_clerk =
 'Clerk#000095055';
+----+...+-----------
+-------------------------------------------------------------------------------+
| id |...| rows      | Extra
           |
+----+...+-----------
+-------------------------------------------------------------------------------+
|  1 |...| 154545408 | Using where; Using parallel query (3 columns, 1 filters, 0
 exprs; 0 extra) |
```

```
+----+...+-----------
+-------------------------------------------------------------------------------+

mysql> explain select o_orderpriority, o_shippriority from orders where o_clerk =
 'Clerk#000095055' for update;
+----+...+-----------+-------------+
| id |...| rows      | Extra       |
+----+...+-----------+-------------+
|  1 |...| 154545408 | Using where |
+----+...+-----------+-------------+
```

B-tree indexes

The statistics gathered by the `ANALYZE TABLE` statement help the optimizer to decide when to use parallel query or index lookups, based on the characteristics of the data for each column. Keep statistics current by running `ANALYZE TABLE` after DML operations that make substantial changes to the data within a table.

If index lookups can perform a query efficiently without a data-intensive scan, Aurora might use index lookups. Doing so avoids the overhead of parallel query processing. There are also concurrency limits on the number of parallel queries that can run simultaneously on any Aurora DB cluster. Make sure to use best practices for indexing your tables, so that your most frequent and most highly concurrent queries use index lookups.

Full-text search (FTS) indexes

Currently, parallel query isn't used for tables that contain a full-text search index, regardless of whether the query refers to such indexed columns or uses the `MATCH` operator.

Virtual columns

Currently, parallel query isn't used for tables that contain a virtual column, regardless of whether the query refers to any virtual columns.

Built-in caching mechanisms

Aurora includes built-in caching mechanisms, namely the buffer pool and the query cache. The Aurora optimizer chooses between these caching mechanisms and parallel query depending on which one is most effective for a particular query.

When a parallel query filters rows and transforms and extracts column values, data is transmitted back to the head node as tuples rather than as data pages. Therefore, running a parallel query doesn't add any pages to the buffer pool, or evict pages that are already in the buffer pool.

Aurora checks the number of pages of table data that are present in the buffer pool, and what proportion of the table data that number represents. Aurora uses that information to determine whether it is more efficient to use parallel query (and bypass the data in the buffer pool). Alternatively, Aurora might use the nonparallel query processing path, which uses data cached in the buffer pool. Which pages are cached and how data-intensive queries affect caching and eviction depends on configuration settings related to the buffer pool. Therefore, it can be hard to predict whether any particular query uses parallel query, because the choice depends on the ever-changing data within the buffer pool.

Also, Aurora imposes concurrency limits on parallel queries. Because not every query uses parallel query, tables that are accessed by multiple queries simultaneously typically have a substantial portion of their data in the buffer pool. Therefore, Aurora often doesn't choose these tables for parallel queries.

When you run a sequence of nonparallel queries on the same table, the first query might be slow due to the data not being in the buffer pool. Then the second and subsequent queries are much faster because the buffer pool is now "warmed up". Parallel queries typically show consistent performance from the very first query against the table. When conducting performance tests, benchmark the nonparallel queries with both a cold and a warm buffer pool. In some cases, the results with a warm buffer pool can compare well to parallel query times. In these cases, consider factors such as the frequency of queries against that table. Also consider whether it is worthwhile to keep the data for that table in the buffer pool.

The query cache avoids rerunning a query when an identical query is submitted and the underlying table data hasn't changed. Queries optimized by parallel query feature can go into the query cache, effectively making them instantaneous when run again.

Note

When conducting performance comparisons, the query cache can produce artificially low timing numbers. Therefore, in benchmark-like situations, you can use the `sql_no_cache` hint. This hint prevents the result from being served from the query cache, even if the same query had been run previously. The hint comes immediately after the SELECT statement in a query. Many parallel query examples in this topic include this hint, to make query times

comparable between versions of the query for which parallel query is turned on and turned off.
Make sure that you remove this hint from your source when you move to production use of parallel query.

Optimizer hints

Another way to control the optimizer is by using optimizer hints, which can be specified within individual statements. For example, you can turn on an optimization for one table in a statement, and then turn off the optimization for a different table. For more information about these hints, see Optimizer Hints in the *MySQL Reference Manual*.

You can use SQL hints with Aurora MySQL queries to fine-tune performance. You can also use hints to prevent execution plans for important queries from changing because of unpredictable conditions.

We have extended the SQL hints feature to help you control optimizer choices for your query plans. These hints apply to queries that use parallel query optimization. For more information, see Aurora MySQL hints.

MyISAM temporary tables

The parallel query optimization only applies to InnoDB tables. Because Aurora MySQL uses MyISAM behind the scenes for temporary tables, internal query phases involving temporary tables never use parallel query. These query phases are indicated by `Using temporary` in the `EXPLAIN` output.

Using Advanced Auditing with an Amazon Aurora MySQL DB cluster

You can use the high-performance Advanced Auditing feature in Amazon Aurora MySQL to audit database activity. To do so, you enable the collection of audit logs by setting several DB cluster parameters. When Advanced Auditing is enabled, you can use it to log any combination of supported events.

You can view or download the audit logs to review the audit information for one DB instance at a time. To do so, you can use the procedures in Monitoring Amazon Aurora log files.

> **Tip**
>
> For an Aurora DB cluster containing multiple DB instances, you might find it more convenient to examine the audit logs for all instances in the cluster. To do so, you can use CloudWatch Logs. You can turn on a setting at the cluster level to publish the Aurora MySQL audit log data to a log group in CloudWatch. Then you can view, filter, and search the audit logs through the CloudWatch interface. For more information, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.

Enabling Advanced Auditing

Use the parameters described in this section to enable and configure Advanced Auditing for your DB cluster.

Use the `server_audit_logging` parameter to enable or disable Advanced Auditing.

Use the `server_audit_events` parameter to specify what events to log.

Use the `server_audit_incl_users` and `server_audit_excl_users` parameters to specify who gets audited. By default, all users are audited. For details about how these parameters work when one or both are left empty, or the same user names are specified in both, see server_audit_incl_users and server_audit_excl_users.

Configure Advanced Auditing by setting these parameters in the parameter group used by your DB cluster. You can use the procedure shown in Modifying parameters in a DB parameter group in Amazon Aurora to modify DB cluster parameters using the Amazon Web Services Management

Console. You can use the modify-db-cluster-parameter-group Amazon CLI command or the ModifyDBClusterParameterGroup Amazon RDS API operation to modify DB cluster parameters programmatically.

Modifying these parameters doesn't require a DB cluster restart when the parameter group is already associated with your cluster. When you associate the parameter group with the cluster for the first time, a cluster restart is required.

Topics

- server_audit_logging
- server_audit_events
- server_audit_incl_users
- server_audit_excl_users

server_audit_logging

Enables or disables Advanced Auditing. This parameter defaults to OFF; set it to ON to enable Advanced Auditing.

No audit data appears in the logs unless you also define one or more types of events to audit using the `server_audit_events` parameter.

To confirm that audit data is logged for a DB instance, check that some log files for that instance have names of the form `audit/audit.log.`*`other_identifying_information`*. To see the names of the log files, follow the procedure in Viewing and listing database log files.

server_audit_events

Contains the comma-delimited list of events to log. Events must be specified in all caps, and there should be no white space between the list elements, for example: `CONNECT,QUERY_DDL`. This parameter defaults to an empty string.

You can log any combination of the following events:

- CONNECT – Logs both successful and failed connections and also disconnections. This event includes user information.
- QUERY – Logs all queries in plain text, including queries that fail due to syntax or permission errors.

> **Tip**
>
> With this event type turned on, the audit data includes information about the continuous monitoring and health-checking information that Aurora does automatically. If you are only interested in particular kinds of operations, you can use the more specific kinds of events. You can also use the CloudWatch interface to search in the logs for events related to specific databases, tables, or users.

- QUERY_DCL – Similar to the QUERY event, but returns only data control language (DCL) queries (GRANT, REVOKE, and so on).
- QUERY_DDL – Similar to the QUERY event, but returns only data definition language (DDL) queries (CREATE, ALTER, and so on).
- QUERY_DML – Similar to the QUERY event, but returns only data manipulation language (DML) queries (INSERT, UPDATE, and so on, and also SELECT).
- TABLE – Logs the tables that were affected by query execution.

> **Note**
>
> There's no filter in Aurora that excludes certain queries from audit logs. To exclude `SELECT` queries, you must exclude all DML statements.
> If a certain user is reporting these internal `SELECT` queries in the audit logs, then you can exclude that user by setting the server_audit_excl_users DB cluster parameter. However, if that user is also used in other activities and can't be omitted, then there is no other option for excluding `SELECT` queries.

server_audit_incl_users

Contains the comma-delimited list of user names for users whose activity is logged. There should be no white space between the list elements, for example: `user_3,user_4`. This parameter defaults to an empty string. The maximum length is 1024 characters. Specified user names must match corresponding values in the `User` column of the `mysql.user` table. For more information about user names, see Account User Names and Passwords in the MySQL documentation.

If `server_audit_incl_users` and `server_audit_excl_users` are both empty (the default), all users are audited.

If you add users to `server_audit_incl_users` and leave `server_audit_excl_users` empty, then only those users are audited.

If you add users to `server_audit_excl_users` and leave `server_audit_incl_users` empty, then all users are audited, except for those listed in `server_audit_excl_users`.

If you add the same users to both `server_audit_excl_users` and `server_audit_incl_users`, then those users are audited. When the same user is listed in both settings, `server_audit_incl_users` is given higher priority.

Connect and disconnect events aren't affected by this variable; they are always logged if specified. A user is logged even if that user is also specified in the `server_audit_excl_users` parameter, because `server_audit_incl_users` has higher priority.

server_audit_excl_users

Contains the comma-delimited list of user names for users whose activity isn't logged. There should be no white space between the list elements, for example: `rdsadmin,user_1,user_2`. This parameter defaults to an empty string. The maximum length is 1024 characters. Specified user names must match corresponding values in the `User` column of the `mysql.user` table. For more information about user names, see Account User Names and Passwords in the MySQL documentation.

If `server_audit_incl_users` and `server_audit_excl_users` are both empty (the default), all users are audited.

If you add users to `server_audit_excl_users` and leave `server_audit_incl_users` empty, then only those users that you list in `server_audit_excl_users` are not audited, and all other users are.

If you add the same users to both `server_audit_excl_users` and `server_audit_incl_users`, then those users are audited. When the same user is listed in both settings, `server_audit_incl_users` is given higher priority.

Connect and disconnect events aren't affected by this variable; they are always logged if specified. A user is logged if that user is also specified in the `server_audit_incl_users` parameter, because that setting has higher priority than `server_audit_excl_users`.

Viewing audit logs

You can view and download the audit logs by using the console. On the **Databases** page, choose the DB instance to show its details, then scroll to the **Logs** section. The audit logs produced by the Advanced Auditing feature have names of the form `audit/audit.log.`*`other_identifying_information`*.

To download a log file, choose that file in the **Logs** section and then choose **Download**.

You can also get a list of the log files by using the describe-db-log-files Amazon CLI command. You can download the contents of a log file by using the download-db-log-file-portion Amazon CLI command. For more information, see Viewing and listing database log files and Downloading a database log file.

Audit log details

Log files are represented as comma-separated variable (CSV) files in UTF-8 format. Queries are also wrapped in single quotes (').

The audit log is stored separately on the local storage of each Aurora MySQL DB instance. Each instance distributes writes across four log files at a time. The maximum size of a log file is 100 MB. When this non-configurable limit is reached, Aurora rotates the file and generates a new file.

> **Tip**
>
> Log file entries are not in sequential order. To order the entries, use the timestamp value. To see the latest events, you might have to review all log files. For more flexibility in sorting and searching the log data, turn on the setting to upload the audit logs to CloudWatch and view them using the CloudWatch interface.
>
> To view audit data with more types of fields and with output in JSON format, you can also use the Database Activity Streams feature. For more information, see Monitoring Amazon Aurora with Database Activity Streams.

The audit log files include the following comma-delimited information in rows, in the specified order:

Field	Description
timestamp	The Unix time stamp for the logged event with microsecond precision.
serverhost	The name of the instance that the event is logged for.
username	The connected user name of the user.
host	The host that the user connected from.
connectionid	The connection ID number for the logged operation.
queryid	The query ID number, which can be used for finding the relational table events and related queries. For `TABLE` events, multiple lines are added.
operation	The recorded action type. Possible values are: `CONNECT`, `QUERY`, `READ`, `WRITE`, `CREATE`, `ALTER`, `RENAME`, and `DROP`.
database	The active database, as set by the `USE` command.
object	For `QUERY` events, this value indicates the query that the database performed. For `TABLE` events, it indicates the table name.
retcode	The return code of the logged operation.

Replication with Amazon Aurora MySQL

The Aurora MySQL replication features are key to the high availability and performance of your cluster. Aurora makes it easy to create or resize clusters with up to 15 Aurora Replicas.

All the replicas work from the same underlying data. If some database instances go offline, others remain available to continue processing queries or to take over as the writer if needed. Aurora automatically spreads your read-only connections across multiple database instances, helping an Aurora cluster to support query-intensive workloads.

In the following topics, you can find information about how Aurora MySQL replication works and how to fine-tune replication settings for best availability and performance.

Topics

- Using Aurora Replicas
- Replication options for Amazon Aurora MySQL
- Performance considerations for Amazon Aurora MySQL replication
- Configuring replication filters with Aurora MySQL
- Monitoring Amazon Aurora MySQL replication
- Replicating Amazon Aurora MySQL DB clusters across Amazon Web Services Regions
- Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication)
- Using GTID-based replication
- Configure delayed replication with Amazon Aurora MySQL
- Configure multi-source replication for Amazon Aurora MySQL

Using Aurora Replicas

Aurora Replicas are independent endpoints in an Aurora DB cluster, best used for scaling read operations and increasing availability. Up to 15 Aurora Replicas can be distributed across the Availability Zones that a DB cluster spans within an Amazon Web Services Region. Although the DB cluster volume is made up of multiple copies of the data for the DB cluster, the data in the cluster volume is represented as a single, logical volume to the primary instance and to Aurora Replicas in the DB cluster. For more information about Aurora Replicas, see Aurora Replicas.

Aurora Replicas work well for read scaling because they are fully dedicated to read operations on your cluster volume. Write operations are managed by the primary instance. Because the cluster volume is shared among all instances in your Aurora MySQL DB cluster, no additional work is required to replicate a copy of the data for each Aurora Replica. In contrast, MySQL read replicas must replay, on a single thread, all write operations from the source DB instance to their local data store. This limitation can affect the ability of MySQL read replicas to support large volumes of read traffic.

With Aurora MySQL, when an Aurora Replica is deleted, its instance endpoint is removed immediately, and the Aurora Replica is removed from the reader endpoint. If there are statements running on the Aurora Replica that is being deleted, there is a three minute grace period. Existing statements can finish gracefully during the grace period. When the grace period ends, the Aurora Replica is shut down and deleted.

Important

Aurora Replicas for Aurora MySQL always use the `REPEATABLE READ` default transaction isolation level for operations on InnoDB tables. You can use the `SET TRANSACTION ISOLATION LEVEL` command to change the transaction level only for the primary instance of an Aurora MySQL DB cluster. This restriction avoids user-level locks on Aurora Replicas, and allows Aurora Replicas to scale to support thousands of active user connections while still keeping replica lag to a minimum.

Note

DDL statements that run on the primary instance might interrupt database connections on the associated Aurora Replicas. If an Aurora Replica connection is actively using a database object, such as a table, and that object is modified on the primary instance using a DDL statement, the Aurora Replica connection is interrupted.

Note

The China (Ningxia) Region does not support cross-Region read replicas.

Replication options for Amazon Aurora MySQL

You can set up replication between any of the following options:

- Two Aurora MySQL DB clusters in different Amazon Web Services Regions, by creating a cross-Region read replica of an Aurora MySQL DB cluster.

  For more information, see Replicating Amazon Aurora MySQL DB clusters across Amazon Web Services Regions.
- Two Aurora MySQL DB clusters in the same Amazon Web Services Region, by using MySQL binary log (binlog) replication.

  For more information, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).
- An RDS for MySQL DB instance as the source and an Aurora MySQL DB cluster, by creating an Aurora read replica of an RDS for MySQL DB instance.

  You can use this approach to bring existing and ongoing data changes into Aurora MySQL during migration to Aurora. For more information, see Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster by using an Aurora read replica.

  You can also use this approach to increase the scalability of read queries for your data. You do so by querying the data using one or more DB instances within a read-only Aurora MySQL cluster. For more information, see Scaling reads for your MySQL database with Amazon Aurora.
- An Aurora MySQL DB cluster in one Amazon Web Services Region and up to five Aurora read-only Aurora MySQL DB clusters in different Regions, by creating an Aurora global database.

  You can use an Aurora global database to support applications with a world-wide footprint. The primary Aurora MySQL DB cluster has a Writer instance and up to 15 Aurora Replicas. The read-only secondary Aurora MySQL DB clusters can each be made up of as many as 16 Aurora Replicas. For more information, see Using Amazon Aurora Global Database.

> **Note**
>
> Rebooting the primary instance of an Amazon Aurora DB cluster also automatically reboots the Aurora Replicas for that DB cluster, to re-establish an entry point that guarantees read/write consistency across the DB cluster.

Performance considerations for Amazon Aurora MySQL replication

The following features help you to fine-tune the performance of Aurora MySQL replication.

The replica log compression feature automatically reduces network bandwidth for replication messages. Because each message is transmitted to all Aurora Replicas, the benefits are greater for larger clusters. This feature involves some CPU overhead on the writer node to perform the compression. It's always enabled in Aurora MySQL version 2 and version 3.

The binlog filtering feature automatically reduces network bandwidth for replication messages. Because the Aurora Replicas don't use the binlog information that is included in the replication messages, that data is omitted from the messages sent to those nodes.

In Aurora MySQL version 2, you can control this feature by changing the `aurora_enable_repl_bin_log_filtering` parameter. This parameter is on by default. Because this optimization is intended to be transparent, you might turn off this setting only during diagnosis or troubleshooting for issues related to replication. For example, you can do so to match the behavior of an older Aurora MySQL cluster where this feature was not available.

Binlog filtering is always enabled in Aurora MySQL version 3 and version 8.4.

Configuring replication filters with Aurora MySQL

You can use replication filters to specify which databases and tables are replicated with a read replica. Replication filters can include databases and tables in replication or exclude them from replication.

The following are some use cases for replication filters:

- To reduce the size of a read replica. With replication filtering, you can exclude the databases and tables that aren't needed on the read replica.
- To exclude databases and tables from read replicas for security reasons.
- To replicate different databases and tables for specific use cases at different read replicas. For example, you might use specific read replicas for analytics or sharding.
- For a DB cluster that has read replicas in different Amazon Web Services Regions, to replicate different databases or tables in different Amazon Web Services Regions.
- To specify which databases and tables are replicated with an Aurora MySQL DB cluster that is configured as a replica in an inbound replication topology. For more information about this

configuration, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

Topics

- Setting replication filtering parameters for Aurora MySQL
- Replication filtering limitations for Aurora MySQL
- Replication filtering examples for Aurora MySQL
- Viewing the replication filters for a read replica

Setting replication filtering parameters for Aurora MySQL

To configure replication filters, set the following parameters:

- `binlog-do-db` – Replicate changes to the specified binary logs. When you set this parameter for a binlog source cluster, only the binary logs specified in the parameter are replicated.
- `binlog-ignore-db` – Don't replicate changes to the specified binary logs. When the `binlog-do-db` parameter is set for a binlog source cluster, this parameter isn't evaluated.
- `replicate-do-db` – Replicate changes to the specified databases. When you set this parameter for a binlog replica cluster, only the databases specified in the parameter are replicated.
- `replicate-ignore-db` – Don't replicate changes to the specified databases. When the `replicate-do-db` parameter is set for a binlog replica cluster, this parameter isn't evaluated.
- `replicate-do-table` – Replicate changes to the specified tables. When you set this parameter for a read replica, only the tables specified in the parameter are replicated. Also, when the `replicate-do-db` or `replicate-ignore-db` parameter is set, make sure to include the database that includes the specified tables in replication with the binlog replica cluster.
- `replicate-ignore-table` – Don't replicate changes to the specified tables. When the `replicate-do-table` parameter is set for a binlog replica cluster, this parameter isn't evaluated.
- `replicate-wild-do-table` – Replicate tables based on the specified database and table name patterns. The `%` and `_` wildcard characters are supported. When the `replicate-do-db` or `replicate-ignore-db` parameter is set, make sure to include the database that includes the specified tables in replication with the binlog replica cluster.
- `replicate-wild-ignore-table` – Don't replicate tables based on the specified database and table name patterns. The `%` and `_` wildcard characters are supported. When the `replicate-`

`do-table` or `replicate-wild-do-table` parameter is set for a binlog replica cluster, this parameter isn't evaluated.

The parameters are evaluated in the order that they are listed. For more information about how these parameters work, see the MySQL documentation:

- For general information, see Replica Server Options and Variables.
- For information about how database replication filtering parameters are evaluated, see Evaluation of Database-Level Replication and Binary Logging Options.
- For information about how table replication filtering parameters are evaluated, see Evaluation of Table-Level Replication Options.

By default, each of these parameters has an empty value. On each binlog cluster, you can use these parameters to set, change, and delete replication filters. When you set one of these parameters, separate each filter from others with a comma.

You can use the `%` and `_` wildcard characters in the `replicate-wild-do-table` and `replicate-wild-ignore-table` parameters. The `%` wildcard matches any number of characters, and the `_` wildcard matches only one character.

The binary logging format of the source DB instance is important for replication because it determines the record of data changes. The setting of the `binlog_format` parameter determines whether the replication is row-based or statement-based. For more information, see Configuring Aurora MySQL binary logging .

> **Note**
>
> All data definition language (DDL) statements are replicated as statements, regardless of the `binlog_format` setting on the source DB instance.

Replication filtering limitations for Aurora MySQL

The following limitations apply to replication filtering for Aurora MySQL:

- Replication filters are supported only for Aurora MySQL version 3 and version 8.4.
- Each replication filtering parameter has a 2,000-character limit.

- Commas aren't supported in replication filters.
- Replication filtering doesn't support XA transactions.

  For more information, see Restrictions on XA Transactions in the MySQL documentation.

Replication filtering examples for Aurora MySQL

To configure replication filtering for a read replica, modify the replication filtering parameters in the DB cluster parameter group associated with the read replica.

> **Note**
>
> You can't modify a default DB cluster parameter group. If the read replica is using a default parameter group, create a new parameter group and associate it with the read replica. For more information on DB cluster parameter groups, see Parameter groups for Amazon Aurora.

You can set parameters in a DB cluster parameter group using the Amazon Web Services Management Console, Amazon CLI, or RDS API. For information about setting parameters, see Modifying parameters in a DB parameter group in Amazon Aurora. When you set parameters in a DB cluster parameter group, all of the DB clusters associated with the parameter group use the parameter settings. If you set the replication filtering parameters in a DB cluster parameter group, make sure that the parameter group is associated only with read replica clusters. Leave the replication filtering parameters empty for source DB instances.

The following examples set the parameters using the Amazon CLI. These examples set `ApplyMethod` to `immediate` so that the parameter changes occur immediately after the CLI command completes. If you want a pending change to be applied after the read replica is rebooted, set `ApplyMethod` to `pending-reboot`.

The following examples set replication filters:

- Including databases in replication
- Including tables in replication
- Including tables in replication with wildcard characters
- Excluding databases from replication

- Excluding tables from replication
- Excluding tables from replication using wildcard characters

Example Including databases in replication

The following example includes the `mydb1` and `mydb2` databases in replication.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name myparametergroup \
  --parameters "ParameterName=replicate-do-
db,ParameterValue='mydb1,mydb2',ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
  --db-cluster-parameter-group-name myparametergroup ^
  --parameters "ParameterName=replicate-do-
db,ParameterValue='mydb1,mydb2',ApplyMethod=immediate"
```

Example Including tables in replication

The following example includes the `table1` and `table2` tables in database `mydb1` in replication.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name myparametergroup \
  --parameters "ParameterName=replicate-do-
table,ParameterValue='mydb1.table1,mydb1.table2',ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
  --db-cluster-parameter-group-name myparametergroup ^
  --parameters "ParameterName=replicate-do-
table,ParameterValue='mydb1.table1,mydb1.table2',ApplyMethod=immediate"
```

Example Including tables in replication using wildcard characters

The following example includes tables with names that begin with `order` and `return` in database `mydb` in replication.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name myparametergroup \
  --parameters "ParameterName=replicate-wild-do-table,ParameterValue='mydb.order
%,mydb.return%',ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
  --db-cluster-parameter-group-name myparametergroup ^
  --parameters "ParameterName=replicate-wild-do-table,ParameterValue='mydb.order
%,mydb.return%',ApplyMethod=immediate"
```

Example Excluding databases from replication

The following example excludes the `mydb5` and `mydb6` databases from replication.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name myparametergroup \
  --parameters "ParameterName=replicate-ignore-
db,ParameterValue='mydb5,mydb6',ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
  --db-cluster-parameter-group-name myparametergroup ^
  --parameters "ParameterName=replicate-ignore-
db,ParameterValue='mydb5,mydb6,ApplyMethod=immediate"
```

Example Excluding tables from replication

The following example excludes tables `table1` in database `mydb5` and `table2` in database `mydb6` from replication.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name myparametergroup \
  --parameters "ParameterName=replicate-ignore-
table,ParameterValue='mydb5.table1,mydb6.table2',ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
  --db-cluster-parameter-group-name myparametergroup ^
  --parameters "ParameterName=replicate-ignore-
table,ParameterValue='mydb5.table1,mydb6.table2',ApplyMethod=immediate"
```

Example Excluding tables from replication using wildcard characters

The following example excludes tables with names that begin with `order` and `return` in database `mydb7` from replication.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name myparametergroup \
  --parameters "ParameterName=replicate-wild-ignore-table,ParameterValue='mydb7.order
%,mydb7.return%',ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
  --db-cluster-parameter-group-name myparametergroup ^
  --parameters "ParameterName=replicate-wild-ignore-table,ParameterValue='mydb7.order
%,mydb7.return%',ApplyMethod=immediate"
```

Viewing the replication filters for a read replica

You can view the replication filters for a read replica in the following ways:

- Check the settings of the replication filtering parameters in the parameter group associated with the read replica.

  For instructions, see Viewing parameter values for a DB parameter group in Amazon Aurora.

- In a MySQL client, connect to the read replica and run the `SHOW REPLICA STATUS` statement.

  In the output, the following fields show the replication filters for the read replica:

  - `Binlog_Do_DB`
  - `Binlog_Ignore_DB`
  - `Replicate_Do_DB`
  - `Replicate_Ignore_DB`
  - `Replicate_Do_Table`
  - `Replicate_Ignore_Table`
  - `Replicate_Wild_Do_Table`
  - `Replicate_Wild_Ignore_Table`

  For more information about these fields, see Checking Replication Status in the MySQL documentation.

Monitoring Amazon Aurora MySQL replication

Read scaling and high availability depend on minimal lag time. You can monitor how far an Aurora Replica is lagging behind the primary instance of your Aurora MySQL DB cluster by monitoring the Amazon CloudWatch `AuroraReplicaLag` metric. The `AuroraReplicaLag` metric is recorded in each Aurora Replica.

The primary DB instance also records the `AuroraReplicaLagMaximum` and `AuroraReplicaLagMinimum` Amazon CloudWatch metrics. The `AuroraReplicaLagMaximum` metric records the maximum amount of lag between the primary DB instance and each Aurora Replica in the DB cluster. The `AuroraReplicaLagMinimum` metric records the minimum amount of lag between the primary DB instance and each Aurora Replica in the DB cluster.

If you need the most current value for Aurora Replica lag, you can check the `AuroraReplicaLag` metric in Amazon CloudWatch. The Aurora Replica lag is also recorded on each Aurora Replica of your Aurora MySQL DB cluster in the `information_schema.replica_host_status` table. For more information on this table, see information_schema.replica_host_status.

For more information on monitoring RDS instances and CloudWatch metrics, see Monitoring metrics in an Amazon Aurora cluster.

Replicating Amazon Aurora MySQL DB clusters across Amazon Web Services Regions

You can create an Amazon Aurora MySQL DB cluster as a read replica in a different Amazon Web Services Region than the source DB cluster. Taking this approach can improve your disaster recovery capabilities, let you scale read operations into an Amazon Web Services Region that is closer to your users, and make it easier to migrate from one Amazon Web Services Region to another.

You can create read replicas of both encrypted and unencrypted DB clusters. The read replica must be encrypted if the source DB cluster is encrypted.

For each source DB cluster, you can have up to five cross-Region DB clusters that are read replicas.

> **Note**
>
> As an alternative to cross-Region read replicas, you can scale read operations with minimal lag time by using an Aurora global database. An Aurora global database has a primary Aurora DB cluster in one Amazon Web Services Region and up to 10 secondary read-only DB clusters in different Regions. Each secondary DB cluster can include up to 16 (rather than 15) Aurora Replicas. Replication from the primary DB cluster to all secondaries is handled by the Aurora storage layer rather than by the database engine, so lag time for replicating changes is minimal—typically, less than 1 second. Keeping the database engine out of the replication process means that the database engine is dedicated to processing workloads. It also means that you don't need to configure or manage the Aurora MySQL binlog (binary logging) replication. To learn more, see Using Amazon Aurora Global Database.

When you create an Aurora MySQL DB cluster read replica in another Amazon Web Services Region, you should be aware of the following:

- Both your source DB cluster and your cross-Region read replica DB cluster can have up to 15 Aurora Replicas, along with the primary instance for the DB cluster. By using this functionality, you can scale read operations for both your source Amazon Web Services Region and your replication target Amazon Web Services Region.
- In a cross-Region scenario, there is more lag time between the source DB cluster and the read replica due to the longer network channels between Amazon Web Services Regions.

- Data transferred for cross-Region replication incurs Amazon RDS data transfer charges. The following cross-Region replication actions generate charges for the data transferred out of the source Amazon Web Services Region:
  - When you create the read replica, Amazon RDS takes a snapshot of the source cluster and transfers the snapshot to the Amazon Web Services Region that holds the read replica.
  - For each data modification made in the source databases, Amazon RDS transfers data from the source region to the Amazon Web Services Region that holds the read replica.

  For more information about Amazon RDS data transfer pricing, see Amazon Aurora pricing.
- You can run multiple concurrent create or delete actions for read replicas that reference the same source DB cluster. However, you must stay within the limit of five read replicas for each source DB cluster.
- For replication to operate effectively, each read replica should have the same amount of compute and storage resources as the source DB cluster. If you scale the source DB cluster, you should also scale the read replicas.

Topics

- Before you begin
- Creating a cross-Region read replica DB cluster for Aurora MySQL
- Promoting a read replica to a DB cluster for Aurora MySQL
- Troubleshooting cross-Region replicas for Amazon Aurora MySQL

Before you begin

Before you can create an Aurora MySQL DB cluster that is a cross-Region read replica, you must turn on binary logging on your source Aurora MySQL DB cluster. Cross-region replication for Aurora MySQL uses MySQL binary replication to replay changes on the cross-Region read replica DB cluster.

To turn on binary logging on an Aurora MySQL DB cluster, update the `binlog_format` parameter for your source DB cluster. The `binlog_format` parameter is a cluster-level parameter that is in the default cluster parameter group. If your DB cluster uses the default DB cluster parameter group, create a new DB cluster parameter group to modify `binlog_format` settings. We recommend that you set the `binlog_format` to `MIXED`. However, you can also set

`binlog_format` to `ROW` or `STATEMENT` if you need a specific binlog format. Reboot your Aurora DB cluster for the change to take effect.

For more information about using binary logging with Aurora MySQL, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication). For more information about modifying Aurora MySQL configuration parameters, see Amazon Aurora DB cluster and DB instance parameters and Parameter groups for Amazon Aurora.

Creating a cross-Region read replica DB cluster for Aurora MySQL

You can create an Aurora DB cluster that is a cross-Region read replica by using the Amazon Web Services Management Console, the Amazon Command Line Interface (Amazon CLI), or the Amazon RDS API. You can create cross-Region read replicas from both encrypted and unencrypted DB clusters.

When you create a cross-Region read replica for Aurora MySQL by using the Amazon Web Services Management Console, Amazon RDS creates a DB cluster in the target Amazon Web Services Region, and then automatically creates a DB instance that is the primary instance for that DB cluster.

When you create a cross-Region read replica using the Amazon CLI or RDS API, you first create the DB cluster in the target Amazon Web Services Region and wait for it to become active. Once it is active, you then create a DB instance that is the primary instance for that DB cluster.

Replication begins when the primary instance of the read replica DB cluster becomes available.

Use the following procedures to create a cross-Region read replica from an Aurora MySQL DB cluster. These procedures work for creating read replicas from either encrypted or unencrypted DB clusters.

Console

To create an Aurora MySQL DB cluster that is a cross-Region read replica with the Amazon Web Services Management Console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the Amazon Web Services Management Console, select the Amazon Web Services Region that hosts your source DB cluster.

3. In the navigation pane, choose **Databases**.
4. Choose the DB cluster for which you want to create a cross-Region read replica.
5. For **Actions**, choose **Create cross-Region read replica**.
6. On the **Create cross region read replica** page, choose the option settings for your cross-Region read replica DB cluster, as described in the following table.

Option	Description
Destination region	Choose the Amazon Web Services Region to host the new cross-Region read replica DB cluster.
Destination DB subnet group	Choose the DB subnet group to use for the cross-Region read replica DB cluster.
Publicly accessible	Choose **Yes** to give the cross-Region read replica DB cluster a public IP address; otherwise, select **No**.
Encryption	Select **Enable Encryption** to turn on encryption at rest for this DB cluster. For more information, see Encrypting Amazon Aurora resources.
Amazon KMS key	Only available if **Encryption** is set to **Enable Encryption**. Select the Amazon KMS key to use for encrypting this DB cluster. For more information, see Encrypting Amazon Aurora resources.
DB instance class	Choose a DB instance class that defines the processing and memory requirements for the primary instance in the DB cluster. For more information about DB instance class options, see Amazon AuroraDB instance classes.
Multi-AZ deployment	Choose **Yes** to create a read replica of the new DB cluster in another Availability Zone in the target Amazon Web Services Region for failover support. For more information about multiple Availability Zones, see Regions and Availability Zones.

Option	Description
Read replica source	Choose the source DB cluster to create a cross-Region read replica for.
DB instance identifier	Type a name for the primary instance in your cross-Region read replica DB cluster. This identifier is used in the endpoint address for the primary instance of the new DB cluster. The DB instance identifier has the following constrain ts: • It must contain from 1 to 63 alphanumeric characters or hyphens. • Its first character must be a letter. • It cannot end with a hyphen or contain two consecutive hyphens. • It must be unique for all DB instances for each Amazon Web Services account, for each Amazon Web Services Region. Because the cross-Region read replica DB cluster is created from a snapshot of the source DB cluster, the master user name and master password for the read replica are the same as the master user name and master password for the source DB cluster.

Option	Description
DB cluster identifier	Type a name for your cross-Region read replica DB cluster that is unique for your account in the target Amazon Web Services Region for your replica. This identifier is used in the cluster endpoint address for your DB cluster. For information on the cluster endpoint, see Amazon Aurora endpoint connections. The DB cluster identifier has the following constrain ts: • It must contain from 1 to 63 alphanumeric characters or hyphens. • Its first character must be a letter. • It cannot end with a hyphen or contain two consecutive hyphens. • It must be unique for all DB clusters for each Amazon Web Services account, for each Amazon Web Services Region.
Priority	Choose a failover priority for the primary instance of the new DB cluster. This priority determines the order in which Aurora Replicas are promoted when recovering from a primary instance failure. If you don't select a value, the default is **tier-1**. For more information, see Fault tolerance for an Aurora DB cluster.
Database port	Specify the port for applications and utilities to use to access the database. Aurora DB clusters default to the default MySQL port, 3306. Firewalls at some companies block connections to this port. If your company firewall blocks the default port, choose another port for the new DB cluster.

Option	Description
Enhanced monitoring	Choose **Enable enhanced monitoring** to turn on gathering metrics in real time for the operating system that your DB cluster runs on. For more information, see Monitoring OS metrics with Enhanced Monitoring.
Monitoring Role	Only available if **Enhanced Monitoring** is set to **Enable enhanced monitoring**. Choose the IAM role that you created to permit Amazon RDS to communicate with Amazon CloudWatch Logs for you, or choose **Default** to have RDS create a role for you named `rds-monitoring-role` . For more information, see Monitoring OS metrics with Enhanced Monitoring.
Granularity	Only available if **Enhanced Monitoring** is set to **Enable enhanced monitoring**. Set the interval, in seconds, between when metrics are collected for your DB cluster.
Auto minor version upgrade	This setting doesn't apply to Aurora MySQL DB clusters. For more information about engine updates for Aurora MySQL, see Database engine updates for Amazon Aurora MySQL.

7. Choose **Create** to create your cross-Region read replica for Aurora.

Amazon CLI

To create an Aurora MySQL DB cluster that is a cross-Region read replica with the CLI

1. Call the Amazon CLI create-db-cluster command in the Amazon Web Services Region where you want to create the read replica DB cluster. Include the `--replication-source-`

`identifier` option and specify the Amazon Resource Name (ARN) of the source DB cluster to create a read replica for.

For cross-Region replication where the DB cluster identified by `--replication-source-identifier` is encrypted, specify the `--kms-key-id` option and the `--storage-encrypted` option.

> **Note**
>
> You can set up cross-Region replication from an unencrypted DB cluster to an encrypted read replica by specifying `--storage-encrypted` and providing a value for `--kms-key-id`.

You can't specify the `--master-username` and `--master-user-password` parameters. Those values are taken from the source DB cluster.

The following code example creates a read replica in the us-east-1 Region from an unencrypted DB cluster snapshot in the us-west-2 Region. The command is called in the us-east-1 Region. This example specifies the `--manage-master-user-password` option to generate the master user password and manage it in Secrets Manager. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager. Alternatively, you can use the `--master-password` option to specify and manage the password yourself.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
  --db-cluster-identifier sample-replica-cluster \
  --engine aurora-mysql \
  --engine-version 8.0.mysql_aurora.3.08.0 \
  --replication-source-identifier arn:aws-cn:rds:us-
west-2:123456789012:cluster:sample-master-cluster
```

For Windows:

```
aws rds create-db-cluster ^
  --db-cluster-identifier sample-replica-cluster ^
  --engine aurora-mysql ^
  --engine-version 8.0.mysql_aurora.3.08.0 ^
```

```
  --replication-source-identifier arn:aws-cn:rds:us-
west-2:123456789012:cluster:sample-master-cluster
```

The following code example creates a read replica in the us-east-1 Region from an encrypted DB cluster snapshot in the us-west-2 Region. The command is called in the us-east-1 Region.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
  --db-cluster-identifier sample-replica-cluster \
  --engine aurora-mysql \
  --engine-version 8.0.mysql_aurora.3.08.0 \
  --replication-source-identifier arn:aws-cn:rds:us-
west-2:123456789012:cluster:sample-master-cluster \
  --kms-key-id my-us-east-1-key \
  --storage-encrypted
```

For Windows:

```
aws rds create-db-cluster ^
  --db-cluster-identifier sample-replica-cluster ^
  --engine aurora-mysql ^
  --engine-version 8.0.mysql_aurora.3.08.0 ^
  --replication-source-identifier arn:aws-cn:rds:us-
west-2:123456789012:cluster:sample-master-cluster ^
  --kms-key-id my-us-east-1-key ^
  --storage-encrypted
```

If `--source-region` isn't specified, specify a `--pre-signed-url` value. A *presigned URL* is a URL that contains a Signature Version 4 signed request for the `create-db-cluster` command that is called in the source Amazon Web Services Region. To learn more about the `pre-signed-url` option, see create-db-cluster in the *Amazon CLI Command Reference*.

2. Check that the DB cluster has become available to use by using the Amazon CLI describe-db-clusters command, as shown in the following example.

```
aws rds describe-db-clusters --db-cluster-identifier sample-replica-cluster
```

When the **`describe-db-clusters`** results show a status of `available`, create the primary instance for the DB cluster so that replication can begin. To do so, use the Amazon CLI create-db-instance command as shown in the following example.

For Linux, macOS, or Unix:

```
aws rds create-db-instance \
  --db-cluster-identifier sample-replica-cluster \
  --db-instance-class db.r5.large \
  --db-instance-identifier sample-replica-instance \
  --engine aurora-mysql
```

For Windows:

```
aws rds create-db-instance ^
  --db-cluster-identifier sample-replica-cluster ^
  --db-instance-class db.r5.large ^
  --db-instance-identifier sample-replica-instance ^
  --engine aurora-mysql
```

When the DB instance is created and available, replication begins. You can determine if the DB instance is available by calling the Amazon CLI describe-db-instances command.

RDS API

To create an Aurora MySQL DB cluster that is a cross-Region read replica with the API

1. Call the RDS API CreateDBCluster operation in the Amazon Web Services Region where you want to create the read replica DB cluster. Include the `ReplicationSourceIdentifier` parameter and specify the Amazon Resource Name (ARN) of the source DB cluster to create a read replica for.

   For cross-Region replication where the DB cluster identified by `ReplicationSourceIdentifier` is encrypted, specify the `KmsKeyId` parameter and set the `StorageEncrypted` parameter to `true`.

> **Note**
>
> You can set up cross-Region replication from an unencrypted DB cluster to an encrypted read replica by specifying `StorageEncrypted` as **`true`** and providing a value for `KmsKeyId`. In this case, you don't need to specify `PreSignedUrl`.

You don't need to include the `MasterUsername` and `MasterUserPassword` parameters, because those values are taken from the source DB cluster.

The following code example creates a read replica in the us-east-1 Region from an unencrypted DB cluster snapshot in the us-west-2 Region. The action is called in the us-east-1 Region.

```
https://rds.us-east-1.amazonaws.com/
  ?Action=CreateDBCluster
  &ReplicationSourceIdentifier=arn:aws-cn:rds:us-
west-2:123456789012:cluster:sample-master-cluster
  &DBClusterIdentifier=sample-replica-cluster
  &Engine=aurora-mysql
  &SignatureMethod=HmacSHA256
  &SignatureVersion=4
  &Version=2014-10-31
  &X-Amz-Algorithm=AWS4-HMAC-SHA256
  &X-Amz-Credential=AKIADQKE4SARGYLE/20161117/us-east-1/rds/aws4_request
  &X-Amz-Date=20160201T001547Z
  &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
  &X-Amz-Signature=a04c831a0b54b5e4cd236a90dcb9f5fab7185eb3b72b5ebe9a70a4e95790c8b7
```

The following code example creates a read replica in the us-east-1 Region from an encrypted DB cluster snapshot in the us-west-2 Region. The action is called in the us-east-1 Region.

```
https://rds.us-east-1.amazonaws.com/
  ?Action=CreateDBCluster
  &KmsKeyId=my-us-east-1-key
  &StorageEncrypted=true
  &PreSignedUrl=https%253A%252F%252Frds.us-west-2.amazonaws.com%252F
         %253FAction%253DCreateDBCluster
         %2526DestinationRegion%253Dus-east-1
         %2526KmsKeyId%253Dmy-us-east-1-key
```

```
        %2526ReplicationSourceIdentifier%253Darn%25253Aaws%25253Ards%25253Aus-
west-2%25253A123456789012%25253Acluster%25253Asample-master-cluster
        %2526SignatureMethod%253DHmacSHA256
        %2526SignatureVersion%253D4
        %2526Version%253D2014-10-31
        %2526X-Amz-Algorithm%253DAWS4-HMAC-SHA256
        %2526X-Amz-Credential%253DAKIADQKE4SARGYLE%252F20161117%252Fus-
west-2%252Frds%252Faws4_request
        %2526X-Amz-Date%253D20161117T215409Z
        %2526X-Amz-Expires%253D3600
        %2526X-Amz-SignedHeaders%253Dcontent-type%253Bhost%253Buser-agent%253Bx-
amz-content-sha256%253Bx-amz-date
        %2526X-Amz-Signature
%253D255a0f17b4e717d3b67fad163c3ec26573b882c03a65523522cf890a67fca613
  &ReplicationSourceIdentifier=arn:aws-cn:rds:us-
west-2:123456789012:cluster:sample-master-cluster
  &DBClusterIdentifier=sample-replica-cluster
  &Engine=aurora-mysql
  &SignatureMethod=HmacSHA256
  &SignatureVersion=4
  &Version=2014-10-31
  &X-Amz-Algorithm=AWS4-HMAC-SHA256
  &X-Amz-Credential=AKIADQKE4SARGYLE/20161117/us-east-1/rds/aws4_request
  &X-Amz-Date=20160201T001547Z
  &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
  &X-Amz-Signature=a04c831a0b54b5e4cd236a90dcb9f5fab7185eb3b72b5ebe9a70a4e95790c8b7
```

2. Check that the DB cluster has become available to use by using the RDS API DescribeDBClusters operation, as shown in the following example.

```
https://rds.us-east-1.amazonaws.com/
  ?Action=DescribeDBClusters
  &DBClusterIdentifier=sample-replica-cluster
  &SignatureMethod=HmacSHA256
  &SignatureVersion=4
  &Version=2014-10-31
  &X-Amz-Algorithm=AWS4-HMAC-SHA256
  &X-Amz-Credential=AKIADQKE4SARGYLE/20161117/us-east-1/rds/aws4_request
  &X-Amz-Date=20160201T002223Z
  &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
  &X-Amz-Signature=84c2e4f8fba7c577ac5d820711e34c6e45ffcd35be8a6b7c50f329a74f35f426
```

When `DescribeDBClusters` results show a status of `available`, create the primary instance for the DB cluster so that replication can begin. To do so, use the RDS API CreateDBInstance action as shown in the following example.

```
https://rds.us-east-1.amazonaws.com/
  ?Action=CreateDBInstance
  &DBClusterIdentifier=sample-replica-cluster
  &DBInstanceClass=db.r5.large
  &DBInstanceIdentifier=sample-replica-instance
  &Engine=aurora-mysql
  &SignatureMethod=HmacSHA256
  &SignatureVersion=4
  &Version=2014-10-31
  &X-Amz-Algorithm=AWS4-HMAC-SHA256
  &X-Amz-Credential=AKIADQKE4SARGYLE/20161117/us-east-1/rds/aws4_request
  &X-Amz-Date=20160201T003808Z
  &X-Amz-SignedHeaders=content-type;host;user-agent;x-amz-content-sha256;x-amz-date
  &X-Amz-Signature=125fe575959f5bbcebd53f2365f907179757a08b5d7a16a378dfa59387f58cdb
```

When the DB instance is created and available, replication begins. You can determine if the DB instance is available by calling the Amazon CLI DescribeDBInstances command.

Viewing Amazon Aurora MySQL cross-Region replicas

You can view the cross-Region replication relationships for your Amazon Aurora MySQL DB clusters by calling the describe-db-clusters Amazon CLI command or the DescribeDBClusters RDS API operation. In the response, refer to the `ReadReplicaIdentifiers` field for the DB cluster identifiers of any cross-Region read replica DB clusters. Refer to the `ReplicationSourceIdentifier` element for the ARN of the source DB cluster that is the replication source.

Promoting a read replica to a DB cluster for Aurora MySQL

You can promote an Aurora MySQL read replica to a standalone DB cluster. When you promote an Aurora MySQL read replica, its DB instances are rebooted before they become available.

Typically, you promote an Aurora MySQL read replica to a standalone DB cluster as a data recovery scheme if the source DB cluster fails.

To do this, first create a read replica and then monitor the source DB cluster for failures. In the event of a failure, do the following:

1. Promote the read replica.
2. Direct database traffic to the promoted DB cluster.
3. Create a replacement read replica with the promoted DB cluster as its source.

When you promote a read replica, the read replica becomes a standalone Aurora DB cluster. The promotion process can take several minutes or longer to complete, depending on the size of the read replica. After you promote the read replica to a new DB cluster, it's just like any other DB cluster. For example, you can create read replicas from it and perform point-in-time restore operations. You can also create Aurora Replicas for the DB cluster.

Because the promoted DB cluster is no longer a read replica, you can't use it as a replication target.

The following steps show the general process for promoting a read replica to a DB cluster:

1. Stop any transactions from being written to the read replica source DB cluster, and then wait for all updates to be made to the read replica. Database updates occur on the read replica after they have occurred on the source DB cluster, and this replication lag can vary significantly. Use the `ReplicaLag` metric to determine when all updates have been made to the read replica. The `ReplicaLag` metric records the amount of time a read replica DB instance lags behind the source DB instance. When the `ReplicaLag` metric reaches `0`, the read replica has caught up to the source DB instance.
2. Promote the read replica by using the **Promote** option on the Amazon RDS console, the Amazon CLI command promote-read-replica-db-cluster, or the PromoteReadReplicaDBCluster Amazon RDS API operation.

   You choose an Aurora MySQL DB instance to promote the read replica. After the read replica is promoted, the Aurora MySQL DB cluster is promoted to a standalone DB cluster. The DB instance with the highest failover priority is promoted to the primary DB instance for the DB cluster. The other DB instances become Aurora Replicas.

> **Note**
>
> The promotion process takes a few minutes to complete. When you promote a read replica, replication is stopped and the DB instances are rebooted. When the reboot is complete, the read replica is available as a new DB cluster.

Console

To promote an Aurora MySQL read replica to a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. On the console, choose **Instances**.

   The **Instance** pane appears.
3. In the **Instances** pane, choose the read replica that you want to promote.

   The read replicas appear as Aurora MySQL DB instances.
4. For **Actions**, choose **Promote read replica**.
5. On the acknowledgment page, choose **Promote read replica**.

Amazon CLI

To promote a read replica to a DB cluster, use the Amazon CLI promote-read-replica-db-cluster command.

Example

For Linux, macOS, or Unix:

```
aws rds promote-read-replica-db-cluster \
    --db-cluster-identifier mydbcluster
```

For Windows:

```
aws rds promote-read-replica-db-cluster ^
```

```
    --db-cluster-identifier mydbcluster
```

RDS API

To promote a read replica to a DB cluster, call PromoteReadReplicaDBCluster.

Troubleshooting cross-Region replicas for Amazon Aurora MySQL

Following you can find a list of common error messages that you might encounter when creating an Amazon Aurora cross-Region read replica, and how to resolve the specified errors.

Source cluster [DB cluster ARN] doesn't have binlogs enabled

To resolve this issue, turn on binary logging on the source DB cluster. For more information, see Before you begin.

Source cluster [DB cluster ARN] doesn't have cluster parameter group in sync on writer

You receive this error if you have updated the `binlog_format` DB cluster parameter, but have not rebooted the primary instance for the DB cluster. Reboot the primary instance (that is, the writer) for the DB cluster and try again.

Source cluster [DB cluster ARN] already has a read replica in this region

You can have up to five cross-Region DB clusters that are read replicas for each source DB cluster in any Amazon Web Services Region. If you already have the maximum number of read replicas for a DB cluster in a particular Amazon Web Services Region, you must delete an existing one before you can create a new cross-Region DB cluster in that Region.

DB cluster [DB cluster ARN] requires a database engine upgrade for cross-Region replication support

To resolve this issue, upgrade the database engine version for all of the instances in the source DB cluster to the most recent database engine version, and then try creating a cross-Region read replica DB again.

Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication)

Because Amazon Aurora MySQL is compatible with MySQL, you can set up replication between a MySQL database and an Amazon Aurora MySQL DB cluster. This type of replication uses the MySQL

binary log replication, also referred to as *binlog replication*. If you use binary log replication with Aurora, we recommend that your MySQL database run MySQL version 5.5 or later. You can set up replication where your Aurora MySQL DB cluster is the replication source or the replica. You can replicate with an Amazon RDS MySQL DB instance, a MySQL database external to Amazon RDS, or another Aurora MySQL DB cluster.

> **Note**
>
> You can't use binlog replication to or from certain types of Aurora DB clusters. In particular, binlog replication isn't available for Aurora Serverless v1 clusters. If the `SHOW MASTER STATUS` and `SHOW SLAVE STATUS` (Aurora MySQL version 2) or `SHOW REPLICA STATUS` (Aurora MySQL version 3) statement returns no output, check that the cluster you're using supports binlog replication.

You can also replicate with an RDS for MySQL DB instance or Aurora MySQL DB cluster in another Amazon Web Services Region. When you're performing replication across Amazon Web Services Regions, make sure that your DB clusters and DB instances are publicly accessible. If the Aurora MySQL DB clusters are in private subnets in your VPC, use VPC peering between the Amazon Web Services Regions. For more information, see A DB cluster in a VPC accessed by an EC2 instance in a different VPC.

If you want to configure replication between an Aurora MySQL DB cluster and an Aurora MySQL DB cluster in another Amazon Web Services Region, you can create an Aurora MySQL DB cluster as a read replica in a different Amazon Web Services Region from the source DB cluster. For more information, see Replicating Amazon Aurora MySQL DB clusters across Amazon Web Services Regions.

With Aurora MySQL version 2 and 3, you can replicate between Aurora MySQL and an external source or target that uses global transaction identifiers (GTIDs) for replication. Ensure that the GTID-related parameters in the Aurora MySQL DB cluster have settings that are compatible with the GTID status of the external database. To learn how to do this, see Using GTID-based replication. In Aurora MySQL version 3.01 and higher, you can choose how to assign GTIDs to transactions that are replicated from a source that doesn't use GTIDs. For information about the stored procedure that controls that setting, see mysql.rds_assign_gtids_to_anonymous_transactions (Aurora MySQL version 3).

Warning

When you replicate between Aurora MySQL and MySQL, make sure that you use only InnoDB tables. If you have MyISAM tables that you want to replicate, you can convert them to InnoDB before setting up replication with the following command.

```
alter table <schema>.<table_name> engine=innodb, algorithm=copy;
```

In the following sections, set up replication, stop replication, scale reads for your database, optimize binlog replication, and set up enhanced binlog.

Topics

- Setting up binary log replication for Aurora MySQL
- Stopping binary log replication for Aurora MySQL
- Scaling reads for your MySQL database with Amazon Aurora
- Optimizing binary log replication for Aurora MySQL
- Setting up enhanced binlog for Aurora MySQL

Setting up binary log replication for Aurora MySQL

Setting up MySQL replication with Aurora MySQL involves the following steps, which are discussed in detail:

Contents

- 1. Turn on binary logging on the replication source
- 2. Retain binary logs on the replication source until no longer needed
- 3. Create a copy or dump of your replication source
- 4. Load the dump into your replica target (if needed)
- 5. Create a replication user on your replication source
- 6. Turn on replication on your replica target
  - Setting a location to stop replication to a read replica
- 7. Monitor your replica
- Synchronizing passwords between replication source and target

1. Turn on binary logging on the replication source

Find instructions on how to turn on binary logging on the replication source for your database engine following.

Database engine	Instructions
Aurora MySQL	**To turn on binary logging on an Aurora MySQL DB cluster** Set the `binlog_format` DB cluster parameter to `ROW`, `STATEMENT` , or `MIXED`. `MIXED` is recommended unless you have a need for a specific binlog format. (The default value is `OFF`.) To change the `binlog_format` parameter, create a custom DB cluster parameter group and associate that custom parameter group with your DB cluster. You can't change parameters in the default DB cluster parameter group. If you're changing the `binlog_format` parameter from `OFF` to another value, reboot your Aurora DB cluster for the change to take effect. For more information, see Amazon Aurora DB cluster and DB instance parameters and Parameter groups for Amazon Aurora.
RDS for MySQL	**To turn on binary logging on an Amazon RDS DB instance** You can't turn on binary logging directly for an Amazon RDS DB instance, but you can turn it on by doing one of the following: • Turn on automated backups for the DB instance. You can turn on automated backups when you create a DB instance, or you can turn on backups by modifying an existing DB instance. For more information, see Creating a DB instance in the *Amazon RDS User Guide*. • Create a read replica for the DB instance. For more information, see Working with read replicas in the *Amazon RDS User Guide*.
MySQL (external)	**To set up encrypted replication** To replicate data securely with Aurora MySQL version 2, you can use encrypted replication.

Database engine	Instructions

> **Note**
>
> If you don't need to use encrypted replication, you can skip these steps.

The following are prerequisites for using encrypted replication:

- Secure Sockets Layer (SSL) must be enabled on the external MySQL source database.
- A client key and client certificate must be prepared for the Aurora MySQL DB cluster.

During encrypted replication, the Aurora MySQL DB cluster acts a client to the MySQL database server. The certificates and keys for the Aurora MySQL client are in files in .pem format.

1. Ensure that you are prepared for encrypted replication:

   - If you don't have SSL enabled on the external MySQL source database and don't have a client key and client certificate prepared, turn on SSL on the MySQL database server and generate the required client key and client certificate.
   - If SSL is enabled on the external source, supply a client key and certificate for the Aurora MySQL DB cluster. If you don't have these, generate a new key and certificate for the Aurora MySQL DB cluster. To sign the client certificate, you must have the certificate authority key that you used to configure SSL on the external MySQL source database.

   For more information, see Creating SSL certificates and keys using openssl in the MySQL documentation.

   You need the certificate authority certificate, the client key, and the client certificate.
2. Connect to the Aurora MySQL DB cluster as the master user using SSL.

Database engine	Instructions

For information about connecting to an Aurora MySQL DB cluster with SSL, see TLS connections to Aurora MySQL DB clusters.

3. Run the `mysql.rds_import_binlog_ssl_material` stored procedure to import the SSL information into the Aurora MySQL DB cluster.

   For the `ssl_material_value` parameter, insert the information from the .pem format files for the Aurora MySQL DB cluster in the correct JSON payload.

   The following example imports SSL information into an Aurora MySQL DB cluster. In .pem format files, the body code typically is longer than the body code shown in the example.

```
call mysql.rds_import_binlog_ssl_material(
'{"ssl_ca":"-----BEGIN CERTIFICATE-----
AAAAB3NzaC1yc2EAAAADAQABAAABAQClKsfkNkuSevGj3eYhCe53pcj
qP3maAhDFcvBS7O6V
hz2ItxCih+PnDSUaw+WNQn/mZphTk/a/gU8jEzoOWbkM4yxyb/wB96
xbiFveSFJuOp/d6RJhJOI0iBXr
lsLnBItntckiJ7FbtxJMXLvvwJryDUilBMTjYtwB+QhYXUMOzce5Pjz5/
i8SeJtjnV3iAoG/cQk+0FzZ
qaeJAAHco+CY/5WrUBkrHmFJr6HcXkvJdWPkYQS3xqC0+FmUZofz22
1CBt5IMucxXPkX4rWi+z7wB3Rb
BQoQzd8v7yeb7OzlPnWOyN0qFU0XA246RA8QFYiCNYwI3f05p6KLxEXAMPLE
-----END CERTIFICATE-----\n","ssl_cert":"-----BEGIN CERTIFICA
TE-----
AAAAB3NzaC1yc2EAAAADAQABAAABAQClKsfkNkuSevGj3eYhCe53pcj
qP3maAhDFcvBS7O6V
hz2ItxCih+PnDSUaw+WNQn/mZphTk/a/gU8jEzoOWbkM4yxyb/wB96
xbiFveSFJuOp/d6RJhJOI0iBXr
lsLnBItntckiJ7FbtxJMXLvvwJryDUilBMTjYtwB+QhYXUMOzce5Pjz5/
i8SeJtjnV3iAoG/cQk+0FzZ
qaeJAAHco+CY/5WrUBkrHmFJr6HcXkvJdWPkYQS3xqC0+FmUZofz22
1CBt5IMucxXPkX4rWi+z7wB3Rb
BQoQzd8v7yeb7OzlPnWOyN0qFU0XA246RA8QFYiCNYwI3f05p6KLxEXAMPLE
-----END CERTIFICATE-----\n","ssl_key":"-----BEGIN RSA PRIVATE
 KEY-----
```

Database engine	Instructions

```
AAAAB3NzaC1yc2EAAAADAQABAAABAQClKsfkNkuSevGj3eYhCe53pc
jqP3maAhDFcvBS7O6V
hz2ItxCih+PnDSUaw+WNQn/mZphTk/a/gU8jEzoOWbkM4yxyb/wB96xbiFveSF
JuOp/d6RJhJOI0iBXr
lsLnBItntckiJ7FbtxJMXLvvwJryDUilBMTjYtwB+QhYXUMOzce5Pjz5/i8SeJ
tjnV3iAoG/cQk+0FzZ
qaeJAAHco+CY/5WrUBkrHmFJr6HcXkvJdWPkYQS3xqC0+FmUZofz221CBt5IMu
cxXPkX4rWi+z7wB3Rb
BQoQzd8v7yeb7OzlPnWOyN0qFU0XA246RA8QFYiCNYwI3f05p6KLxEXAMPLE
-----END RSA PRIVATE KEY-----\n"}');
```

For more information, see mysql.rds_import_binlog_ssl_material and TLS connections to Aurora MySQL DB clusters.

> **Note**
>
> After running the procedure, the secrets are stored in files. To erase the files later, you can run the mysql.rds_remove_binlog_ssl_material stored procedure.

To turn on binary logging on an external MySQL database

1. From a command shell, stop the mysql service.

```
sudo service mysqld stop
```

2. Edit the `my.cnf` file (this file is usually under `/etc`).

```
sudo vi /etc/my.cnf
```

Add the `log_bin` and `server_id` options to the `[mysqld]` section. The `log_bin` option provides a file name identifier for binary log files. The `server_id` option provides a unique identifier for the server in source-replica relationships.

Database engine	Instructions

	If encrypted replication isn't required, ensure that the external MySQL database is started with binlogs enabled and SSL is turned off.
	
	The following are the relevant entries in the `/etc/my.cnf` file for unencrypted data.
	
	`log-bin=mysql-bin`
	`server-id=2133421`
	`innodb_flush_log_at_trx_commit=1`
	`sync_binlog=1`
	
	If encrypted replication is required, ensure that the external MySQL database is started with SSL and binlogs enabled.
	
	The entries in the `/etc/my.cnf` file include the .pem file locations for the MySQL database server.
	
	`log-bin=mysql-bin`
	`server-id=2133421`
	`innodb_flush_log_at_trx_commit=1`
	`sync_binlog=1`
	
	`# Setup SSL.`
	`ssl-ca=/home/sslcerts/ca.pem`
	`ssl-cert=/home/sslcerts/server-cert.pem`
	`ssl-key=/home/sslcerts/server-key.pem`
	
	Additionally, the `sql_mode` option for your MySQL DB instance must be set to 0, or must not be included in your my.cnf file.
	
	While connected to the external MySQL database, record the external MySQL database's binary log position.
	
	`mysql> SHOW MASTER STATUS;`
	
	Your output should be similar to the following:

Database engine	Instructions

```
+------------------+----------+--------------+------------------
+-------------------+
| File             | Position | Binlog_Do_DB | Binlog_Ignore_DB |
 Executed_Gtid_Set |
+------------------+----------+--------------+------------------
+-------------------+
| mysql-bin.000031 |      107 |              |                  |
              |
+------------------+----------+--------------+------------------
+-------------------+
1 row in set (0.00 sec)
```

For more information, see Setting the replication source configuration in the MySQL documentation.

3. Start the mysql service.

```
sudo service mysqld start
```

2. Retain binary logs on the replication source until no longer needed

When you use MySQL binary log replication, Amazon RDS doesn't manage the replication process. As a result, you need to ensure that the binlog files on your replication source are retained until after the changes have been applied to the replica. This maintenance helps you to restore your source database in the event of a failure.

Use the following instructions to retain binary logs for your database engine.

Database engine	Instructions
Aurora MySQL	**To retain binary logs on an Aurora MySQL DB cluster** You don't have access to the binlog files for an Aurora MySQL DB cluster. As a result, you must choose a time frame to retain the binlog files on your replication source long enough to ensure that the changes have been applied to your replica before

Database engine	Instructions
	the binlog file is deleted by Amazon RDS. You can retain binlog files on an Aurora MySQL DB cluster for up to 90 days. If you're setting up replication with a MySQL database or RDS for MySQL DB instance as the replica, and the database that you are creating a replica for is very large, choose a large time frame to retain binlog files until the initial copy of the database to the replica is complete and the replica lag has reached 0. To set the binary log retention time frame, use the mysql.rds_set_configuration procedure and specify a configuration parameter of `'binlog retention hours'` along with the number of hours to retain binlog files on the DB cluster. The maximum value for Aurora MySQL version 2.11.0 and higher and version 3 is 2160 (90 days). The following example sets the retention period for binlog files to 6 days: `CALL mysql.rds_set_configuration('binlog retention hours', 144);` After replication has been started, you can verify that changes have been applied to your replica by running the `SHOW SLAVE STATUS` (Aurora MySQL version 2) or `SHOW REPLICA STATUS` (Aurora MySQL version 3) command on your replica and checking the `Seconds behind master` field. If the `Seconds behind master` field is 0, then there is no replica lag. When there is no replica lag, reduce the length of time that binlog files are retained by setting the `binlog retention hours` configuration parameter to a smaller time frame. If this setting isn't specified, the default for Aurora MySQL is 24 (1 day). If you specify a value for `'binlog retention hours'` that is higher than the maximum value, then Aurora MySQL uses the maximum.

Database engine	Instructions
RDS for MySQL	**To retain binary logs on an Amazon RDS DB instance** You can retain binary log files on an Amazon RDS DB instance by setting the binlog retention hours just as with an Aurora MySQL DB cluster, described in the previous row. You can also retain binlog files on an Amazon RDS DB instance by creating a read replica for the DB instance. This read replica is temporary and solely for the purpose of retaining binlog files. After the read replica has been created, call the mysql.rds_stop_replication procedure on the read replica. While replication is stopped, Amazon RDS doesn't delete any of the binlog files on the replication source. After you have set up replication with your permanent replica, you can delete the read replica when the replica lag (`Seconds behind master` field) between your replication source and your permanent replica reaches 0.
MySQL (external)	**To retain binary logs on an external MySQL database** Because binlog files on an external MySQL database are not managed by Amazon RDS, they are retained until you delete them. After replication has been started, you can verify that changes have been applied to your replica by running the `SHOW SLAVE STATUS` (Aurora MySQL version 2) or `SHOW REPLICA STATUS` (Aurora MySQL version 3) command on your replica and checking the `Seconds behind master` field. If the `Seconds behind master` field is 0, then there is no replica lag. When there is no replica lag, you can delete old binlog files.

3. Create a copy or dump of your replication source

You use a snapshot, clone, or dump of your replication source to load a baseline copy of your data onto your replica. Then you start replicating from that point.

Use the following instructions to create a copy or dump of the replication source for your database engine.

Database engine	Instructions

Aurora MySQL	**To create a copy of an Aurora MySQL DB cluster**
	
	Use one of the following methods:
	
	• Restore from a DB cluster snapshot:
	1. Create a DB cluster snapshot of your Amazon Aurora DB cluster. For more information, see Creating a DB cluster snapshot.
	2. Create a new Aurora DB cluster by restoring from the DB cluster snapshot that you just created.
	
	Be sure to retain the same DB parameter group for your restored DB cluster as your original DB cluster. Doing this ensures that the copy of your DB cluster has binary logging enabled. For more information, see Restoring from a DB cluster snapshot.
	• Clone your DB cluster. For more information, see Cloning a volume for an Amazon Aurora DB cluster.
	
	To determine the binlog file name and position
	
	Use one of the following methods:
	
	• In the Amazon Web Services Management Console:
	1. Choose **Databases**, then choose the primary instance (writer) for your new Aurora DB cluster to show its details.
	2. Scroll to **Recent Events**. An event message shows that includes the binlog file name and position. The event message is in the following format.
	
	`Binlog position from crash recovery is binlog-file-name binlog-position`
	
	3. Save the binlog file name and position values for when you start replication.
	• Call the describe-events Amazon CLI command, as in the following example.
	
	`aws rds describe-events`

Database engine	Instructions

```
{
    "Events": [
        {
            "EventCategories": [],
            "SourceType": "db-instance",
            "SourceArn": "arn:aws:rds:us-west-2:123456789012:
db:sample-restored-instance",
            "Date": "2016-10-28T19:43:46.862Z",
            "Message": "Binlog position from crash recovery is mysql-
bin-changelog.000003 4278",
            "SourceIdentifier": "sample-restored-instance"
        }
    ]
}
```

- Check the MySQL error log for the last MySQL binlog file position.

To create a dump of an Aurora MySQL DB cluster

If your replica target is an external MySQL database or an RDS for MySQL DB instance, then you must create a dump file from your Aurora DB cluster.

Be sure to run the `mysqldump` command against the copy of your source DB cluster that you created. This is to avoid locking considerations when taking the dump. If the dump were taken on the source DB cluster directly, it would be necessary to lock the source tables to prevent concurrent writes to them while the dump is in progress.

1. Connect to your DB cluster using a MySQL client.
2. Issue the `mysqldump` command. For example:

```
PROMPT> mysqldump --databases database_name --single-transaction
--order-by-primary -r backup.sql -u local_user s -p
```

3. After you create the dump file, you can delete the DB cluster copy.

Database engine	Instructions
RDS for MySQL	**To create a snapshot of an Amazon RDS DB instance** Create a read replica of your Amazon RDS DB instance. For more information, see Creating a read replica in the *Amazon Relational Database Service User Guide*. 1. Connect to your read replica and stop replication by running the mysql.rds_stop_replication procedure. 2. While the read replica is **Stopped**, Connect to the read replica and run the `SHOW SLAVE STATUS` (Aurora MySQL version 2) or `SHOW REPLICA STATUS` (Aurora MySQL version 3) command. Retrieve the current binary log file name from the `Relay_Master_Log_File` field and the log file position from the `Exec_Master_Log_Pos` field. Save these values for when you start replication. 3. While the read replica remains **Stopped**, create a DB snapshot of the read replica. For more information, see Creating a DB snapshot in the *Amazon Relational Database Service User Guide*. 4. Delete the read replica.

Database engine	Instructions

MySQL (external)	**To create a dump of an external MySQL database**
	1. Before you create a dump, you need to ensure that the binlog location for the dump is current with the data in your source instance. To do this, you must first stop any write operations to the instance with the following command:
	`mysql> FLUSH TABLES WITH READ LOCK;`
	2. Create a dump of your MySQL database using the `mysqldump` command as shown following:
	`PROMPT> sudo mysqldump --databases database_name --master-data=2 --single-transaction \ --order-by-primary -r backup.sql -u local_user -p`
	3. After you have created the dump, unlock the tables in your MySQL database with the following command:
	`mysql> UNLOCK TABLES;`

4. Load the dump into your replica target (if needed)

If you plan to load data from a dump of a MySQL database that is external to Amazon RDS, you might want to create an EC2 instance to copy the dump files to. Then you can load the data into your DB cluster or DB instance from that EC2 instance. Using this approach, you can compress the dump file(s) before copying them to the EC2 instance in order to reduce the network costs associated with copying data to Amazon RDS. You can also encrypt the dump file or files to secure the data as it is being transferred across the network.

> **Note**
>
> If you create a new Aurora MySQL DB cluster as your replica target, then you don't need to load a dump file:

- You can restore from a DB cluster snapshot to create a new DB cluster. For more information, see Restoring from a DB cluster snapshot.
- You can clone your source DB cluster to create a new DB cluster. For more information, see Cloning a volume for an Amazon Aurora DB cluster.
- You can migrate the data from a DB instance snapshot into a new DB cluster. For more information, see Migrating data to an Amazon Aurora MySQL DB cluster.

Use the following instructions to load the dump of your replication source into your replica target for your database engine.

Database engine	Instructions

Aurora MySQL	**To load a dump into an Aurora MySQL DB cluster**
	1. Copy the output of the `mysqldump` command from your replication source to a location that can also connect to your Aurora MySQL DB cluster.
	2. Connect to your Aurora MySQL DB cluster using the `mysql` command. The following is an example.
	`PROMPT> mysql -h host_name -port=3306 -u db_master_user -p`
	3. At the `mysql` prompt, run the `source` command and pass it the name of your database dump file to load the data into the Aurora MySQL DB cluster, for example:
	`mysql> source backup.sql;`

RDS for MySQL	**To load a dump into an Amazon RDS DB instance** 1. Copy the output of the `mysqldump` command from your replication source to a location that can also connect to your MySQL DB instance. 2. Connect to your MySQL DB instance using the `mysql` command. The following is an example.

Database engine	Instructions
	``` PROMPT> mysql -h host_name -port=3306 -u db_master_user -p ``` 3. At the `mysql` prompt, run the `source` command and pass it the name of your database dump file to load the data into the MySQL DB instance, for example: ``` mysql> source backup.sql; ```
MySQL (external)	**To load a dump into an external MySQL database** You can't load a DB snapshot or a DB cluster snapshot into an external MySQL database. Instead, you must use the output from the `mysqldump` command. 1. Copy the output of the `mysqldump` command from your replication source to a location that can also connect to your MySQL database. 2. Connect to your MySQL database using the `mysql` command. The following is an example. ``` PROMPT> mysql -h host_name -port=3306 -u db_master_user -p ``` 3. At the `mysql` prompt, run the `source` command and pass it the name of your database dump file to load the data into your MySQL database. The following is an example. ``` mysql> source backup.sql; ```

5. Create a replication user on your replication source

Create a user ID on the source that is used solely for replication. The following example is for RDS for MySQL or external MySQL source databases.

```
mysql> CREATE USER 'repl_user'@'domain_name' IDENTIFIED BY 'password';
```

For Aurora MySQL source databases, the `skip_name_resolve` DB cluster parameter is set to 1 (ON) and can't be modified, so you must use an IP address for the host instead of a domain name. For more information, see skip_name_resolve in the MySQL documentation.

```
mysql> CREATE USER 'repl_user'@'IP_address' IDENTIFIED BY 'password';
```

The user requires the `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges. Grant these privileges to the user.

If you need to use encrypted replication, require SSL connections for the replication user. For example, you can use one of the following statements to require SSL connections on the user account `repl_user`.

```
GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'IP_address';
```

```
GRANT USAGE ON *.* TO 'repl_user'@'IP_address' REQUIRE SSL;
```

> **Note**
>
> If `REQUIRE SSL` isn't included, the replication connection might silently fall back to an unencrypted connection.

6. Turn on replication on your replica target

Before you turn on replication, we recommend that you take a manual snapshot of the Aurora MySQL DB cluster or RDS for MySQL DB instance replica target. If a problem arises and you need to re-establish replication with the DB cluster or DB instance replica target, you can restore the DB cluster or DB instance from this snapshot instead of having to import the data into your replica target again.

Use the following instructions to turn on replication for your database engine.

Database engine	Instructions
Aurora MySQL	**To turn on replication from an Aurora MySQL DB cluster**

Database engine	Instructions
	1. Find the starting place for replication. You need the binlog file name and binlog position. If your DB cluster replica target was created from the following: • DB cluster snapshot or clone – Retrieve the binlog file name and position from the recent events for your new DB cluster, as shown in 3. Create a copy or dump of your replication source. • DB snapshot – You retrieved the binlog file name and position from the `SHOW SLAVE STATUS` (Aurora MySQL version 2) or `SHOW REPLICA STATUS` (Aurora MySQL version 3) command when you created the snapshot of your replication source. 2. Connect to the DB cluster and call the following procedures to start replication with your replication source using the binary log file name and location from the previous step: • mysql.rds_set_external_source (Aurora MySQL version 3) • mysql.rds_set_external_master (Aurora MySQL version 2) • mysql.rds_start_replication (all versions) The following example is for Aurora MySQL version 3. `CALL mysql.rds_set_external_source ('mydbinstance.123456789012 .us-east-1.rds.amazonaws.com', 3306, 'repl_user', 'password', 'mysql-bin-changelog.000031', 107, 0); CALL mysql.rds_start_replication;` To use SSL encryption, set the final value to 1 instead of `0`.

Database engine	Instructions
RDS for MySQL	**To turn on replication from an Amazon RDS DB instance** 1. If your DB instance replica target was created from a DB snapshot, then you need the binlog file and binlog position that are the starting place for replication. You retrieved these values from the `SHOW SLAVE STATUS` (Aurora MySQL version 2) or `SHOW REPLICA STATUS` (Aurora MySQL version 3) command when you created the snapshot of your replication source. 2. Connect to the DB instance and call the mysql.rds_set_external_master (Aurora MySQL version 2) or mysql.rds_set_external_source (Aurora MySQL version 3) and mysql.rds_start_replication procedures to start replication with your replicati on source. Use the binary log file name and location from the previous step. The following is an example. `CALL mysql.rds_set_external_master ('mydbcluster.cluster-12345 6789012.us-east-1.rds.amazonaws.com', 3306, 'repl_user', 'password', 'mysql-bin-changelog.000031', 107, 0); CALL mysql.rds_start_replication;` To use SSL encryption, set the final value to `1` instead of `0`.

Database engine	Instructions

MySQL (external)	**To turn on replication from an external MySQL database**
	1. Retrieve the binlog file and binlog position that are the starting place for replicati on. You retrieved these values from the `SHOW SLAVE STATUS` (Aurora MySQL version 2) or `SHOW REPLICA STATUS` (Aurora MySQL version 3) command when you created the snapshot of your replication source. If your external MySQL replica target was populated from the output of the `mysqldump` command with the `--master-data=2` option, then the binlog file and binlog position are included in the output. The following is an example.
	`-- -- Position to start replication or point-in-time recovery from -- -- CHANGE MASTER TO MASTER_LOG_FILE='mysql-bin-changelog.000031', MASTER_LOG_POS=107;`
	2. Connect to the external MySQL replica target, and issue `CHANGE MASTER TO` and `START SLAVE` (Aurora MySQL version 2) or `START REPLICA` (Aurora MySQL version 3) to start replication with your replication source using the binary log file name and location from the previous step, for example:
	`CHANGE MASTER TO MASTER_HOST = 'mydbcluster.cluster-123456789012.us-east-1.rds.amazonaws.com', MASTER_PORT = 3306, MASTER_USER = 'repl_user', MASTER_PASSWORD = 'password', MASTER_LOG_FILE = 'mysql-bin-changelog.000031', MASTER_LOG_POS = 107; -- And one of these statements depending on your engine version: START SLAVE; -- Aurora MySQL version 2 START REPLICA; -- Aurora MySQL version 3`

If replication fails, it can result in a large increase in unintentional I/O on the replica, which can degrade performance. If replication fails or is no longer needed, you can run the

mysql.rds_reset_external_master (Aurora MySQL version 2) or mysql.rds_reset_external_source (Aurora MySQL version 3) stored procedure to remove the replication configuration.

Setting a location to stop replication to a read replica

In Aurora MySQL version 3.04 and higher, you can start replication and then stop it at a specified binary log file location using the mysql.rds_start_replication_until(Aurora MySQL version 3) stored procedure.

To start replication to a read replica and stop replication at a specific location

1. Using a MySQL client, connect to the replica Aurora MySQL DB cluster as the master user.
2. Run the mysql.rds_start_replication_until(Aurora MySQL version 3) stored procedure.

   The following example initiates replication and replicates changes until it reaches location `120` in the `mysql-bin-changelog.000777` binary log file. In a disaster recovery scenario, assume that location `120` is just before the disaster.

   ```
   call mysql.rds_start_replication_until(
     'mysql-bin-changelog.000777',
     120);
   ```

Replication stops automatically when the stop point is reached. The following RDS event is generated: `Replication has been stopped since the replica reached the stop point specified by the rds_start_replication_until stored procedure`.

If you use GTID-based replication, use the mysql.rds_start_replication_until_gtid(Aurora MySQL version 3) stored procedure instead of the mysql.rds_start_replication_until(Aurora MySQL version 3) stored procedure. For more information about GTID-based replication, see Using GTID-based replication.

7. Monitor your replica

When you set up MySQL replication with an Aurora MySQL DB cluster, you must monitor failover events for the Aurora MySQL DB cluster when it is the replica target. If a failover occurs, then the DB cluster that is your replica target might be recreated on a new host with a different network address. For information on how to monitor failover events, see Working with Amazon RDS event notification.

You can also monitor how far the replica target is behind the replication source by connecting to the replica target and running the `SHOW SLAVE STATUS` (Aurora MySQL version 2) or `SHOW REPLICA STATUS` (Aurora MySQL version 3) command. In the command output, the `Seconds Behind Master` field tells you how far the replica target is behind the source.

> **Important**
>
> If you upgrade your DB cluster and specify a custom parameter group, make sure to manually reboot the cluster after the upgrade finishes. Doing so makes the cluster use your new custom parameter settings, and restarts binlog replication.

Synchronizing passwords between replication source and target

When you change user accounts and passwords on the replication source using SQL statements, those changes are replicated to the replication target automatically.

If you use the Amazon Web Services Management Console, the Amazon CLI, or the RDS API to change the master password on the replication source, those changes are not automatically replicated to the replication target. If you want to synchronize the master user and master password between the source and target systems, you must make the same change on the replication target yourself.

Stopping binary log replication for Aurora MySQL

To stop binary log replication with a MySQL DB instance, external MySQL database, or another Aurora DB cluster, follow these steps, discussed in detail following in this topic.

1. Stop binary log replication on the replica target

2. Turn off binary logging on the replication source

1. Stop binary log replication on the replica target

Use the following instructions to stop binary log replication for your database engine.

Database engine	Instructions
Aurora MySQL	**To stop binary log replication on an Aurora MySQL DB cluster replica target**

Database engine	Instructions
	Connect to the Aurora DB cluster that is the replica target, and call the mysql.rds_stop_replication procedure.
RDS for MySQL	**To stop binary log replication on an Amazon RDS DB instance** Connect to the RDS DB instance that is the replica target and call the mysql.rds_stop_replication procedure.
MySQL (external)	**To stop binary log replication on an external MySQL database** Connect to the MySQL database and run the `STOP SLAVE` (version 5.7) or `STOP REPLICA` (version 8.0) command.

2. Turn off binary logging on the replication source

Use the instructions in the following table to turn off binary logging on the replication source for your database engine.

Database engine	Instructions
Aurora MySQL	**To turn off binary logging on an Amazon Aurora DB cluster** 1. Connect to the Aurora DB cluster that is the replication source. 2. Use the mysql.rds_set_configuration procedure and specify the configuration parameter `binlog retention hours`, with the value `NULL`, as shown in the following example. `CALL mysql.rds_set_configuration('binlog retention hours', NULL);` **Note** You can't use the value `0` for `binlog retention hours`.

Database engine	Instructions
	3. Set the `binlog_format` parameter to `OFF` on the replication source. The `binlog_format` parameter is in the custom DB cluster parameter group associated with your DB cluster. After you've changed the `binlog_format` parameter value, reboot your DB cluster for the change to take effect. For more information, see Amazon Aurora DB cluster and DB instance parameters and Modifying parameters in a DB parameter group in Amazon Aurora.
RDS for MySQL	**To turn off binary logging on an Amazon RDS DB instance** You can't turn off binary logging directly for an Amazon RDS DB instance, but you can turn it off by doing the following: 1. Turn off automated backups for the DB instance. You can turn off automated backups by modifying an existing DB instance and setting the **Backup Retention Period** to 0. For more information, see Modifying an Amazon RDS DB instance and Working with backups in the *Amazon Relational Database Service User Guide*. 2. Delete all read replicas for the DB instance. For more information, see Working with read replicas of MariaDB, MySQL, and PostgreSQL DB instances in the *Amazon Relational Database Service User Guide*.

Database engine	Instructions

MySQL (external)	**To turn off binary logging on an external MySQL database**
	
	Connect to the MySQL database and call the `STOP REPLICATION` command.
	
	1. From a command shell, stop the `mysqld` service,
	
	`sudo service mysqld stop`
	
	2. Edit the `my.cnf` file (this file is usually under `/etc`).
	
	`sudo vi /etc/my.cnf`
	
	Delete the `log_bin` and `server_id` options from the `[mysqld]` section.
	
	For more information, see Setting the replication source configuration in the MySQL documentation.
	
	3. Start the mysql service.
	
	`sudo service mysqld start`

Scaling reads for your MySQL database with Amazon Aurora

You can use Amazon Aurora with your MySQL DB instance to take advantage of the read scaling capabilities of Amazon Aurora and expand the read workload for your MySQL DB instance. To use Aurora to scale reads for your MySQL DB instance, create an Amazon Aurora MySQL DB cluster and make it a read replica of your MySQL DB instance. This applies to an RDS for MySQL DB instance, or a MySQL database running external to Amazon RDS.

For information on creating an Amazon Aurora DB cluster, see Creating an Amazon Aurora DB cluster.

When you set up replication between your MySQL DB instance and your Amazon Aurora DB cluster, be sure to follow these guidelines:

- Use the Amazon Aurora DB cluster endpoint address when you reference your Amazon Aurora MySQL DB cluster. If a failover occurs, then the Aurora Replica that is promoted to the primary instance for the Aurora MySQL DB cluster continues to use the DB cluster endpoint address.
- Maintain the binlogs on your writer instance until you have verified that they have been applied to the Aurora Replica. This maintenance ensures that you can restore your writer instance in the event of a failure.

Important

When using self-managed replication, you're responsible for monitoring and resolving any replication issues that may occur. For more information, see Diagnosing and resolving lag between read replicas.

Note

The permissions required to start replication on an Aurora MySQL DB cluster are restricted and not available to your Amazon RDS master user. Therefore, you must use the mysql.rds_set_external_master (Aurora MySQL version 2) or mysql.rds_set_external_source (Aurora MySQL version 3) and mysql.rds_start_replication procedures to set up replication between your Aurora MySQL DB cluster and your MySQL DB instance.

Start replication between an external source instance and an Aurora MySQL DB cluster

1. Make the source MySQL DB instance read-only:

```
mysql> FLUSH TABLES WITH READ LOCK;
mysql> SET GLOBAL read_only = ON;
```

2. Run the SHOW MASTER STATUS command on the source MySQL DB instance to determine the binlog location. You receive output similar to the following example:

```
File                          Position
-----------------------------------
 mysql-bin-changelog.000031      107
-----------------------------------
```

3. Copy the database from the external MySQL DB instance to the Amazon Aurora MySQL DB cluster using `mysqldump`. For very large databases, you might want to use the procedure in Importing data to an Amazon RDS for MySQL database with reduced downtime in the *Amazon Relational Database Service User Guide*.

   For Linux, macOS, or Unix:

```
mysqldump \
    --databases <database_name> \
    --single-transaction \
    --compress \
    --order-by-primary \
    -u local_user \
    -p local_password | mysql \
        --host aurora_cluster_endpoint_address \
        --port 3306 \
        -u RDS_user_name \
        -p RDS_password
```

   For Windows:

```
mysqldump ^
    --databases <database_name> ^
    --single-transaction ^
    --compress ^
    --order-by-primary ^
    -u local_user ^
    -p local_password | mysql ^
        --host aurora_cluster_endpoint_address ^
        --port 3306 ^
        -u RDS_user_name ^
        -p RDS_password
```

   Note

   Make sure that there is not a space between the `-p` option and the entered password.

   Use the `--host`, `--user (-u)`, `--port` and `-p` options in the `mysql` command to specify the hostname, user name, port, and password to connect to your Aurora DB cluster. The

host name is the DNS name from the Amazon Aurora DB cluster endpoint, for example, `mydbcluster.cluster-123456789012.us-east-1.rds.amazonaws.com`. You can find the endpoint value in the cluster details in the Amazon RDS Management Console.

4. Make the source MySQL DB instance writeable again:

```
mysql> SET GLOBAL read_only = OFF;
mysql> UNLOCK TABLES;
```

For more information on making backups for use with replication, see Backing up a source or replica by making it read only in the MySQL documentation.

5. In the Amazon RDS Management Console, add the IP address of the server that hosts the source MySQL database to the VPC security group for the Amazon Aurora DB cluster. For more information on modifying a VPC security group, see Security groups for your VPC in the *Amazon Virtual Private Cloud User Guide*.

You might also need to configure your local network to permit connections from the IP address of your Amazon Aurora DB cluster, so that it can communicate with your source MySQL instance. To find the IP address of the Amazon Aurora DB cluster, use the `host` command.

```
host aurora_endpoint_address
```

The host name is the DNS name from the Amazon Aurora DB cluster endpoint.

6. Using the client of your choice, connect to the external MySQL instance and create a MySQL user to be used for replication. This account is used solely for replication and must be restricted to your domain to improve security. The following is an example.

```
CREATE USER 'repl_user'@'example.com' IDENTIFIED BY 'password';
```

7. For the external MySQL instance, grant `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges to your replication user. For example, to grant the `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges on all databases for the '`repl_user`' user for your domain, issue the following command.

```
GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'example.com'
    IDENTIFIED BY 'password';
```

8. Take a manual snapshot of the Aurora MySQL DB cluster to be the read replica before setting up replication. If you need to reestablish replication with the DB cluster as a read replica, you can restore the Aurora MySQL DB cluster from this snapshot instead of having to import the data from your MySQL DB instance into a new Aurora MySQL DB cluster.
9. Make the Amazon Aurora DB cluster the replica. Connect to the Amazon Aurora DB cluster as the master user and identify the source MySQL database as the replication source by using the mysql.rds_set_external_master (Aurora MySQL version 2) or mysql.rds_set_external_source (Aurora MySQL version 3) and mysql.rds_start_replication procedures.

   Use the binlog file name and position that you determined in Step 2. The following is an example.

   ```
   For Aurora MySQL version 2:
   CALL mysql.rds_set_external_master ('mymasterserver.example.com', 3306,
       'repl_user', 'password', 'mysql-bin-changelog.000031', 107, 0);

   For Aurora MySQL version 3:
   CALL mysql.rds_set_external_source ('mymasterserver.example.com', 3306,
       'repl_user', 'password', 'mysql-bin-changelog.000031', 107, 0);
   ```
10. On the Amazon Aurora DB cluster, call the mysql.rds_start_replication procedure to start replication.

    ```
    CALL mysql.rds_start_replication;
    ```

After you have established replication between your source MySQL DB instance and your Amazon Aurora DB cluster, you can add Aurora Replicas to your Amazon Aurora DB cluster. You can then connect to the Aurora Replicas to read scale your data. For information on creating an Aurora Replica, see Adding Aurora Replicas to a DB cluster.

Optimizing binary log replication for Aurora MySQL

Following, you can learn how to optimize binary log replication performance and troubleshoot related issues in Aurora MySQL.

> **Tip**
>
> This discussion presumes that you are familiar with the MySQL binary log replication mechanism and how it works. For background information, see Replication Implementation in the MySQL documentation.

Multithreaded binary log replication

With multithreaded binary log replication, a SQL thread reads events from the relay log and queues them up for SQL worker threads to apply. The SQL worker threads are managed by the coordinator thread. The binary log events are applied in parallel when possible. The level of parallelism depends on factors including version, parameters, schema design, and workload characteristics.

Multithreaded binary log replication is supported in Aurora MySQL version 3, and in Aurora MySQL version 2.12.1 and higher. For a multithreaded replica to efficiently process binlog events in parallel, you must configure the source for multithreaded binary log replication, and the source must use a version that includes the parallelism information on its binary log files.

When an Aurora MySQL DB instance is configured to use binary log replication, by default the replica instance uses single-threaded replication for Aurora MySQL versions lower than 3.04. To enable multithreaded replication, you update the `replica_parallel_workers` parameter to a value greater than 1 in your custom parameter group.

For Aurora MySQL version 3.04 and higher, replication is multithreaded by default, with `replica_parallel_workers` set to 4. You can modify this parameter in your custom parameter group.

To increase the resilience of your database against unexpected halts, we recommend that you enable GTID replication on the source and allow GTIDs on the replica. To allow GTID replication, set `gtid_mode` to `ON_PERMISSIVE` on both the source and replica. For more information about GTID-based replication, see Using GTID-based replication.

The following configuration options help you to fine-tune multithreaded replication. For usage information, see Replication and Binary Logging Options and Variables in the *MySQL Reference Manual*. For more information about multithreaded replication, see the MySQL Blog *Improving the Parallel Applier with Writeset-based Dependency Tracking*.

Optimal parameter values depend on several factors. For example, performance for binary log replication is influenced by your database workload characteristics and the DB instance class the replica is running on. Thus, we recommend that you thoroughly test all changes to these configuration parameters before applying new parameter settings to a production instance:

- `binlog_format recommended value` – set to `ROW`
- `binlog_group_commit_sync_delay`
- `binlog_group_commit_sync_no_delay_count`
- `binlog_transaction_dependency_history_size`
- `binlog_transaction_dependency_tracking` – recommended value is `WRITESET`
- `replica_preserve_commit_order`
- `replica_parallel_type` – recommended value is `LOGICAL_CLOCK`
- `replica_parallel_workers`
- `replica_pending_jobs_size_max`
- `transaction_write_set_extraction` – recommended value is `XXHASH64`

Your schema and workload characteristics are factors that affect replication in parallel. The most common factors are the following.

- Absence of primary keys – RDS can't establish writeset dependency for tables without primary keys. With `ROW` format, a single multi-row statement can be accomplished with a single full table scan on the source, but results in one full table scan per row modified on the replica. The absence of primary keys significantly decreases replication throughput.
- Presence of foreign keys – If foreign keys are present, Amazon RDS can't use writeset dependency for parallelism of the tables with the FK relationship.
- Size of transactions – If a single transaction spans dozens or hundreds of megabytes or gigabytes, the coordinator thread and one of the worker threads might spend a long time processing only that transaction. During that time, all other worker threads might remain idle after they conclude processing their previous transactions.

In Aurora MySQL version 3.06 and higher, you can improve performance for binary log replicas when replicating transactions for large tables with more than one secondary index. This feature introduces a thread pool to apply secondary index changes in parallel on a binlog replica. The feature is controlled by the `aurora_binlog_replication_sec_index_parallel_workers`

DB cluster parameter, which controls the total number of parallel threads available to apply the secondary index changes. The parameter is set to `0` (disabled) by default. Enabling this feature doesn't require an instance restart. To enable this feature, stop ongoing replication, set the desired number of parallel worker threads, and then start replication again.

Optimizing binlog replication

In Aurora MySQL 2.10 and higher, Aurora automatically applies an optimization known as the binlog I/O cache to binary log replication. By caching the most recently committed binlog events, this optimization is designed to improve binlog dump thread performance while limiting the impact to foreground transactions on the binlog source instance.

> **Note**
>
> This memory used for this feature is independent of the MySQL `binlog_cache` setting. This feature doesn't apply to Aurora DB instances that use the `db.t2` and `db.t3` instance classes.

You don't need to adjust any configuration parameters to turn on this optimization. In particular, if you had adjusted the configuration parameter `aurora_binlog_replication_max_yield_seconds` to a nonzero value in earlier Aurora MySQL versions, set it back to zero for currently available versions.

The status variables `aurora_binlog_io_cache_reads` and `aurora_binlog_io_cache_read_requests` help you to monitor how often the data is read from the binlog I/O cache.

- `aurora_binlog_io_cache_read_requests` shows the number of binlog I/O read requests from the cache.
- `aurora_binlog_io_cache_reads` shows the number of binlog I/O reads that retrieve information from the cache.

The following SQL query computes the percentage of binlog read requests that take advantage of the cached information. In this case, the closer the ratio is to 100, the better it is.

```
mysql> SELECT
  (SELECT VARIABLE_VALUE FROM INFORMATION_SCHEMA.GLOBAL_STATUS
    WHERE VARIABLE_NAME='aurora_binlog_io_cache_reads')
```

```
  / (SELECT VARIABLE_VALUE FROM INFORMATION_SCHEMA.GLOBAL_STATUS
    WHERE VARIABLE_NAME='aurora_binlog_io_cache_read_requests')
  * 100
  as binlog_io_cache_hit_ratio;
+---------------------------+
| binlog_io_cache_hit_ratio |
+---------------------------+
|         99.99847949080622 |
+---------------------------+
```

The binlog I/O cache feature also includes new metrics related to the binlog dump threads. *Dump threads* are the threads that are created when new binlog replicas are connected to the binlog source instance.

The dump thread metrics are printed to the database log every 60 seconds with the prefix `[Dump thread metrics]`. The metrics include information for each binlog replica such as `Secondary_id`, `Secondary_uuid`, binlog file name, and the position that each replica is reading. The metrics also include `Bytes_behind_primary` representing the distance in bytes between replication source and replica. This metric measures the lag of the replica I/O thread. That figure is different from the lag of the replica SQL applier thread, which is represented by the `seconds_behind_master` metric on the binlog replica. You can determine whether binlog replicas are catching up to the source or falling behind by checking whether the distance decreases or increases.

In-memory relay log

In Aurora MySQL version 3.10 and higher, Aurora introduces an optimization known as in-memory relay log to improve replication throughput. This optimization enhances relay log I/O performance by caching all intermediate relay log content in memory. As a result, it reduces commit latency by minimizing storage I/O operations since the relay log content remains readily accessible in memory.

By default, the in-memory relay log feature is disabled. To enable it, set `aurora_in_memory_relaylog` to `ON` in the DB cluster parameter group.

Once enabled, the in-memory relay log feature takes effect only for Aurora-managed replication scenarios (including blue-green deployments, Aurora-Aurora replication, and cross-region replicas) when the replica uses one of the following settings:

- Single-threaded replication mode (`replica_parallel_workers = 0`)

- Multi-threaded replication with GTID mode enabled:
  - Auto-position enabled
  - GTID mode set to ON on the replica
- File-based replication with `replica_preserve_commit_order = ON`

The in-memory relay log feature is supported on instance classes larger than t3.large, but is not available on Aurora Serverless instances. The relay log circular buffer has a fixed size of 128 MB. To monitor the memory consumption of this feature, you can run the following query:

```
SELECT event_name, current_alloc FROM sys.memory_global_by_current_bytes WHERE
 event_name = 'memory/sql/relaylog_io_cache';
```

The in-memory relay log feature is controlled by the aurora_in_memory_relaylog parameter, which can be set at either the DB cluster or instance level. You can enable or disable this feature dynamically without restarting your instance:

1. Stop the ongoing replication
2. Set aurora_in_memory_relaylog to ON (to enable) or OFF (to disable) in parameter group
3. Restart replication

Example:

```
CALL mysql.rds_stop_replication;
set aurora_in_memory_relaylog to ON to enable or OFF to disable in cluster parameter
 group
CALL mysql.rds_start_replication;
```

Even when aurora_in_memory_relaylog is set to ON, the in-memory relay log feature might still be disabled under certain conditions. To verify the feature's current status, you can use the following command:

```
SHOW GLOBAL STATUS LIKE 'Aurora_in_memory_relaylog_status';
```

If the feature is unexpectedly disabled, you can identify the reason by running:

```
SHOW GLOBAL STATUS LIKE 'Aurora_in_memory_relaylog_disabled_reason';
```

This command returns a message explaining why the feature is currently disabled.

Setting up enhanced binlog for Aurora MySQL

Enhanced binlog reduces the compute performance overhead caused by turning on binlog, which can reach up to 50% in certain cases. With enhanced binlog, this overhead can be reduced to about 13%. To reduce overhead, enhanced binlog writes the binary and transactions logs to storage in parallel, which minimizes the data written at the transaction commit time.

Using enhanced binlog also improves database recovery time after restarts and failovers by up to 99% compared to community MySQL binlog. The enhanced binlog is compatible with existing binlog-based workloads, and you interact with it the same way you interact with the community MySQL binlog.

Enhanced binlog is available on Aurora MySQL version 3.03.1 and higher.

Topics

- Configuring enhanced binlog parameters
- Other related parameters
- Differences between enhanced binlog and community MySQL binlog
- Amazon CloudWatch metrics for enhanced binlog
- Enhanced binlog limitations

Configuring enhanced binlog parameters

You can switch between community MySQL binlog and enhanced binlog by turning on/off the enhanced binlog parameters. The existing binlog consumers can continue to read and consume the binlog files without any gaps in the binlog file sequence.

To turn on enhanced binlog, set the following parameters:

Parameter	Default	Description
`binlog_format`	–	Set the `binlog_format` parameter to the binary logging format of your choice to turn on enhanced binlog.

Parameter	Default	Description
		Make sure the `binlog_format` parameter isn't set to OFF. For more information, see Configuring Aurora MySQL binary logging.
`aurora_enhanced_binlog`	`0`	Set the value of this parameter to 1 in the DB cluster parameter group associated with the Aurora MySQL cluster. When you change the value of this parameter, you must reboot the writer instance when the `DBClusterParameterGroupStatus` value is shown as `pending-reboot`.
`binlog_backup`	`1`	Turn off this parameter to turn on enhanced binlog. To do so, set the value of this parameter to `0`.
`binlog_replication_globaldb`	`1`	Turn off this parameter to turn on enhanced binlog. To do so, set the value of this parameter to `0`.

Important

You can turn off the `binlog_backup` and `binlog_replication_globaldb` parameters only when you use enhanced binlog.

To turn off enhanced binlog, set the following parameters:

Parameter	Description
aurora_enhanced_binlog	Set the value of this parameter to 0 in the DB cluster parameter group associated with the Aurora MySQL cluster. Whenever you change the value of this parameter, you must reboot the writer instance when the DBCluster ParameterGroupStatus value is shown as pending-reboot .
binlog_backup	Turn on this parameter when you turn off enhanced binlog. To do so, set the value of this parameter to 1.
binlog_replication_globaldb	Turn on this parameter when you turn off enhanced binlog. To do so, set the value of this parameter to 1.

To check whether enhanced binlog is turned on, use the following command in the MySQL client:

```
mysql>show status like 'aurora_enhanced_binlog';

+------------------------+--------+
| Variable_name          | Value  |
+------------------------+--------+
| aurora_enhanced_binlog | ACTIVE |
+------------------------+--------+
1 row in set (0.00 sec)
```

When enhanced binlog is turned on, the output shows ACTIVE for aurora_enhanced_binlog.

Other related parameters

When you turn on the enhanced binlog, the following parameters are affected:

- The max_binlog_size parameter is visible but not modifiable. It's default value 134217728 is automatically adjusted to 268435456 when enhanced binlog is turned on.

- Unlike in community MySQL binlog, the `binlog_checksum` doesn't act as a dynamic parameter when the enhanced binlog is turned on. For the change to this parameter to take effect, you must manually reboot the DB cluster even when the `ApplyMethod` is `immediate`.
- The value you set on the `binlog_order_commits` parameter has no effect on the order of the commits when enhanced binlog is turned on. The commits are always ordered without any further performance implications.

Differences between enhanced binlog and community MySQL binlog

Enhanced binlog interacts differently with clones, backups, and Aurora global database when compared to community MySQL binlog. We recommend that you understand the following differences before using enhanced binlog.

- Enhanced binlog files from the source DB cluster aren't available on a cloned DB cluster.
- Enhanced binlog files aren't included in Aurora backups. Therefore, enhanced binlog files from the source DB cluster aren't available after restoring a DB cluster despite any retention period set on it.
- When used with an Aurora global database, the enhanced binlog files of the primary DB cluster aren't replicated to the DB cluster in the secondary regions.

Examples

The following examples illustrate the differences between enhanced binlog and community MySQL binlog.

On a restored or cloned DB cluster

When enhanced binlog is turned on, the historical binlog files aren't available in the restored or cloned DB cluster. After a restore or clone operation, if binlog is turned on, the new DB cluster starts writing its own sequence of binlog files, starting from 1 (mysql-bin-changelog.000001).

To turn on enhanced binlog after a restore or clone operation, set the required DB cluster parameters on the restored or cloned DB cluster. For more information, see Configuring enhanced binlog parameters.

Example: Clone or restore operation performed when enhanced binlog is turned on

Source DB Cluster:

```
mysql> show binary logs;

+----------------------------+-----------+-----------+
| Log_name                   | File_size | Encrypted |
+----------------------------+-----------+-----------+
| mysql-bin-changelog.000001 |       156 | No        |
| mysql-bin-changelog.000002 |       156 | No        |
| mysql-bin-changelog.000003 |       156 | No        |
| mysql-bin-changelog.000004 |       156 | No        | --> Enhanced Binlog turned on
| mysql-bin-changelog.000005 |       156 | No        | --> Enhanced Binlog turned on
| mysql-bin-changelog.000006 |       156 | No        | --> Enhanced Binlog turned on
+----------------------------+-----------+-----------+
6 rows in set (0.00 sec)
```

On a restored or cloned DB cluster, binlog files aren't backed up when enhanced binlog is turned on. To avoid discontinuity in the binlog data, the binlog files written before turning on the enhanced binlog are also not available.

```
mysql>show binary logs;

+----------------------------+-----------+-----------+
| Log_name                   | File_size | Encrypted |
+----------------------------+-----------+-----------+
| mysql-bin-changelog.000001 |       156 | No        | --> New sequence of Binlog files
+----------------------------+-----------+-----------+
1 row in set (0.00 sec)
```

Example: Clone or restore operation performed when enhanced binlog is turned off

Source DB cluster:

```
mysql>show binary logs;

+----------------------------+-----------+-----------+
| Log_name                   | File_size | Encrypted |
+----------------------------+-----------+-----------+
| mysql-bin-changelog.000001 |       156 | No        |
| mysql-bin-changelog.000002 |       156 | No        | --> Enhanced Binlog enabled
```

```
| mysql-bin-changelog.000003 |       156 | No        | --> Enhanced Binlog enabled
| mysql-bin-changelog.000004 |       156 | No        |
| mysql-bin-changelog.000005 |       156 | No        |
| mysql-bin-changelog.000006 |       156 | No        |
+----------------------------+-----------+-----------+
6 rows in set (0.00 sec)
```

Enhanced binlog is disabled after `mysql-bin-changelog.000003`. On a restored or cloned DB cluster, binlog files written after turning off the enhanced binlog are available.

```
mysql>show binary logs;

+----------------------------+-----------+-----------+
| Log_name                   | File_size | Encrypted |
+----------------------------+-----------+-----------+
| mysql-bin-changelog.000004 |       156 | No        |
| mysql-bin-changelog.000005 |       156 | No        |
| mysql-bin-changelog.000006 |       156 | No        |
+----------------------------+-----------+-----------+
1 row in set (0.00 sec)
```

On an Amazon Aurora global database

On an Amazon Aurora global database, the binlog data of the primary DB cluster isn't replicated to the secondary DB clusters. After a cross-Region failover process, the binlog data isn't available in the newly promoted primary DB cluster. If binlog is turned on, the newly promoted DB cluster starts its own sequence of binlog files, starting from 1 (mysql-bin-changelog.000001).

To turn on enhanced binlog after failover, you must set the required DB cluster parameters on the secondary DB cluster. For more information, see Configuring enhanced binlog parameters.

Example: Global database failover operation is performed when enhanced binlog is turned on

Old primary DB Cluster (before failover):

```
mysql>show binary logs;

+----------------------------+-----------+-----------+
```

```
| Log_name                   | File_size | Encrypted |
+----------------------------+-----------+-----------+
| mysql-bin-changelog.000001 |       156 | No        |
| mysql-bin-changelog.000002 |       156 | No        |
| mysql-bin-changelog.000003 |       156 | No        |
| mysql-bin-changelog.000004 |       156 | No        | --> Enhanced Binlog enabled
| mysql-bin-changelog.000005 |       156 | No        | --> Enhanced Binlog enabled
| mysql-bin-changelog.000006 |       156 | No        | --> Enhanced Binlog enabled
+----------------------------+-----------+-----------+
6 rows in set (0.00 sec)
```

New primary DB cluster (after failover):

Binlog files aren't replicated to secondary regions when enhanced binlog is turned on. To avoid discontinuity in the binlog data, the binlog files written before turning on the enhanced binlog aren't available.

```
mysql>show binary logs;

+----------------------------+-----------+-----------+
| Log_name                   | File_size | Encrypted |
+----------------------------+-----------+-----------+
| mysql-bin-changelog.000001 |       156 | No        | --> Fresh sequence of Binlog
 files
+----------------------------+-----------+-----------+
1 row in set (0.00 sec)
```

Example: Global database failover operation is performed when enhanced binlog is turned off

Source DB Cluster:

```
mysql>show binary logs;

+----------------------------+-----------+-----------+
| Log_name                   | File_size | Encrypted |
+----------------------------+-----------+-----------+
| mysql-bin-changelog.000001 |       156 | No        |
| mysql-bin-changelog.000002 |       156 | No        | --> Enhanced Binlog enabled
| mysql-bin-changelog.000003 |       156 | No        | --> Enhanced Binlog enabled
| mysql-bin-changelog.000004 |       156 | No        |
```

```
| mysql-bin-changelog.000005 |       156 | No        |
| mysql-bin-changelog.000006 |       156 | No        |
+----------------------------+-----------+-----------+
6 rows in set (0.00 sec)
```

Restored or cloned DB cluster:

Enhanced binlog is disabled after `mysql-bin-changelog.000003`. Binlog files that are written after turning off the enhanced binlog are replicated and are available in the newly promoted DB cluster.

```
mysql>show binary logs;

+----------------------------+-----------+-----------+
| Log_name                   | File_size | Encrypted |
+----------------------------+-----------+-----------+
| mysql-bin-changelog.000004 |       156 | No        |
| mysql-bin-changelog.000005 |       156 | No        |
| mysql-bin-changelog.000006 |       156 | No        |
+----------------------------+-----------+-----------+
3 rows in set (0.00 sec)
```

Amazon CloudWatch metrics for enhanced binlog

The following Amazon CloudWatch metrics are published only when enhanced binlog is turned on.

CloudWatch metric	Description	Units
ChangeLogBytesUsed	The amount of storage used by the enhanced binlog.	Bytes
ChangeLogReadIOPs	The number of read I/O operations performed in the enhanced binlog within a 5-minute interval.	Count per 5 minutes
ChangeLogWriteIOPs	The number of write disk I/O operations performed in the	Count per 5 minutes

CloudWatch metric	Description	Units
	enhanced binlog within a 5-minute interval.	

Enhanced binlog limitations

The following limitations apply to Amazon Aurora DB clusters when enhanced binlog is turned on.

- Enhanced binlog is only supported on Aurora MySQL version3.03.1 and higher.
- The enhanced binlog files written on the primary DB cluster aren't copied to the cloned or restored DB clusters.
- When used with Amazon Aurora global database, the enhanced binlog files of the primary DB cluster aren't replicated to the secondary DB clusters. Therefore, after the failover process, the historical binlog data isn't available in the new primary DB cluster.
- The following binlog configuration parameters are ignored:
  - `binlog_group_commit_sync_delay`
  - `binlog_group_commit_sync_no_delay_count`
  - `binlog_max_flush_queue_time`
- You can't drop or rename a corrupted table in a database. To drop these tables, you can contact Amazon Web Services Support.
- The binlog I/O cache is disabled when enhanced binlog is turned on. For more information, see Optimizing binary log replication for Aurora MySQL.

  > **Note**
  >
  > Enhanced binlog provides similar read performance improvements as binlog I/O cache and better write performance improvements.

- Enhanced binlog can't be turned on in a DB cluster with the backtrack feature currently enabled.

Using GTID-based replication

The following content explains how to use global transaction identifiers (GTIDs) with binary log (binlog) replication between an Aurora MySQL cluster and an external source.

> **Note**
>
> For Aurora, you can use this feature only with Aurora MySQL clusters that use binlog replication to or from an external MySQL database. The other database might be an Amazon RDS MySQL instance, an on-premises MySQL database, or an Aurora DB cluster in a different Amazon Web Services Region. To learn how to configure that kind of replication, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

If you use binlog replication and aren't familiar with GTID-based replication with MySQL, see Replication with global transaction identifiers in the MySQL documentation.

GTID-based replication is supported for Aurora MySQL version 2 and 3.

Topics

- Overview of global transaction identifiers (GTIDs)
- Parameters for GTID-based replication
- Enabling GTID-based replication for an Aurora MySQL cluster
- Using GTID tags with an Aurora MySQL DB cluster
- Disabling GTID-based replication for an Aurora MySQL DB cluster

Overview of global transaction identifiers (GTIDs)

Global transaction identifiers (GTIDs) are unique identifiers generated for committed MySQL transactions. You can use GTIDs to make binlog replication simpler and easier to troubleshoot.

> **Note**
>
> When Aurora synchronizes data among the DB instances in a cluster, that replication mechanism doesn't involve the binary log (binlog). For Aurora MySQL, GTID-based replication only applies when you also use binlog replication to replicate into or out of an Aurora MySQL DB cluster from an external MySQL-compatible database.

MySQL uses two different types of transactions for binlog replication:

- *GTID transactions* – Transactions that are identified by a GTID.
- *Anonymous transactions* – Transactions that don't have a GTID assigned.

In a replication configuration, GTIDs are unique across all DB instances. GTIDs simplify replication configuration because when you use them, you don't have to refer to log file positions. GTIDs also make it easier to track replicated transactions and determine whether the source instance and replicas are consistent.

You typically use GTID-based replication with Aurora when replicating from an external MySQL-compatible database into an Aurora cluster. You can set up this replication configuration as part of a migration from an on-premises or Amazon RDS database into Aurora MySQL. If the external database already uses GTIDs, enabling GTID-based replication for the Aurora cluster simplifies the replication process.

You configure GTID-based replication for an Aurora MySQL cluster by first setting the relevant configuration parameters in a DB cluster parameter group. You then associate that parameter group with the cluster.

Parameters for GTID-based replication

Use the following parameters to configure GTID-based replication.

Parameter	Valid values	Description
`gtid_mode`	`OFF`, `OFF_PERMISSIVE` , `ON_PERMISSIVE` , `ON`	`OFF` specifies that new transactions are anonymous transactions (that is, don't have GTIDs), and a transaction must be anonymous to be replicated. `OFF_PERMISSIVE` specifies that new transactions are anonymous transactions, but all transactions can be replicated. `ON_PERMISSIVE` specifies that new transactions are GTID transactions, but all transactions can be replicated.

Parameter	Valid values	Description
		ON specifies that new transactions are GTID transactions, and a transaction must be a GTID transaction to be replicated.
enforce_gtid_consistency	OFF, ON, WARN	OFF allows transactions to violate GTID consistency. ON prevents transactions from violating GTID consistency. WARN allows transactions to violate GTID consistency but generates a warning when a violation occurs.

Note

In the Amazon Web Services Management Console, the gtid_mode parameter appears as gtid-mode.

For GTID-based replication, use these settings for the DB cluster parameter group for your Aurora MySQL DB cluster:

- ON and ON_PERMISSIVE apply only to outgoing replication from an Aurora MySQL cluster. Both of these values cause your Aurora DB cluster to use GTIDs for transactions that are replicated to an external database. ON requires that the external database also use GTID-based replication. ON_PERMISSIVE makes GTID-based replication optional on the external database.
- OFF_PERMISSIVE, if set, means that your Aurora DB cluster can accept incoming replication from an external database. It can do this whether the external database uses GTID-based replication or not.
- OFF, if set, means that your Aurora DB cluster only accepts incoming replication from external databases that don't use GTID-based replication.

> **Tip**
>
> Incoming replication is the most common binlog replication scenario for Aurora MySQL clusters. For incoming replication, we recommend that you set the GTID mode to `OFF_PERMISSIVE`. That setting allows incoming replication from external databases regardless of the GTID settings at the replication source.

For more information about parameter groups, see Parameter groups for Amazon Aurora.

Enabling GTID-based replication for an Aurora MySQL cluster

When GTID-based replication is enabled for an Aurora MySQL DB cluster, the GTID settings apply to both inbound and outbound binlog replication.

To enable GTID-based replication for an Aurora MySQL cluster

1. Create or edit a DB cluster parameter group using the following parameter settings:
   - `gtid_mode` – `ON` or `ON_PERMISSIVE`
   - `enforce_gtid_consistency` – `ON`
2. Associate the DB cluster parameter group with the Aurora MySQL cluster. To do so, follow the procedures in Parameter groups for Amazon Aurora.
3. (Optional) Specify how to assign GTIDs to transactions that don't include them. To do so, call the stored procedure in mysql.rds_assign_gtids_to_anonymous_transactions (Aurora MySQL version 3).

Using GTID tags with an Aurora MySQL DB cluster

Starting with Aurora MySQL version 8.4.10, you can add a tag to the global transaction identifiers (GTIDs) of your transactions. Tags make it easier to identify and track groups of related transactions, such as the transactions from a specific application or batch job. A tagged GTID has the format *`source_id`*`:`*`tag`*`:`*`transaction_id`*, for example `ed102faf-eb00-11eb-8f20-0c5415bfaa1d:tag1:117`. Tagged and untagged GTIDs can exist together in the same DB cluster.

A tag name can be up to 32 characters long. It must start with a letter or underscore, and it can contain only letters, digits, and underscores. Tag names aren't case-sensitive, so `TAG1` and `tag1` are the same tag.

Before you start, enable binary logging, set `gtid_mode` and `enforce_gtid_consistency` to `ON` in your DB cluster parameter group. Your database user also needs the `TRANSACTION_GTID_TAG` privilege. To grant it, connect as your administrative user and run the following:

```
GRANT TRANSACTION_GTID_TAG ON *.* TO 'user'@'host';
```

To tag transactions, set `gtid_next` to `AUTOMATIC:` followed by your tag name. For example, the following tags a transaction with `tag1` and then turns off tagging:

```
SET @@SESSION.gtid_next = 'AUTOMATIC:tag1';

START TRANSACTION;
-- your statements
COMMIT;

SET @@SESSION.gtid_next = 'AUTOMATIC';
```

The tag applies to every transaction in the session until you set `gtid_next` back to `AUTOMATIC` or to a different tag. If you use a connection pool, reset `gtid_next` to `AUTOMATIC` before you return the connection to the pool. You can't change `gtid_next` while a transaction is open.

To view your tagged transactions, query `gtid_executed`:

```
SELECT @@GLOBAL.gtid_executed;
```

Tagged transactions appear as a separate range after the untagged range, for example `3E11FA47-71CA-11E1-9E33-C80AA9429562:1-20:tag1:1-5`. Each tag has its own sequence of transaction numbers.

Disabling GTID-based replication for an Aurora MySQL DB cluster

You can disable GTID-based replication for an Aurora MySQL DB cluster. Doing so means that the Aurora cluster can't perform inbound or outbound binlog replication with external databases that use GTID-based replication.

> **Note**
>
> In the following procedure, *read replica* means the replication target in an Aurora configuration with binlog replication to or from an external database. It doesn't mean the read-only Aurora Replica DB instances. For example, when an Aurora cluster accepts incoming replication from an external source, the Aurora primary instance acts as the read replica for binlog replication.

For more details about the stored procedures mentioned in this section, see Aurora MySQL stored procedure reference.

To disable GTID-based replication for an Aurora MySQL DB cluster

1. On the Aurora replicas, run the following procedure:

   For version 3

   ```
   CALL mysql.rds_set_source_auto_position(0);
   ```

   For version 2

   ```
   CALL mysql.rds_set_master_auto_position(0);
   ```

2. Reset the `gtid_mode` to `ON_PERMISSIVE`.

   a. Make sure that the DB cluster parameter group associated with the Aurora MySQL cluster has `gtid_mode` set to `ON_PERMISSIVE`.

      For more information about setting configuration parameters using parameter groups, see Parameter groups for Amazon Aurora.

   b. Restart the Aurora MySQL DB cluster.

3. Reset the `gtid_mode` to `OFF_PERMISSIVE`.

   a. Make sure that the DB cluster parameter group associated with the Aurora MySQL cluster has `gtid_mode` set to `OFF_PERMISSIVE`.

   b. Restart the Aurora MySQL DB cluster.

4. Wait for all of the GTID transactions to be applied on the Aurora primary instance. To check that these are applied, do the following steps:

   a. On the Aurora primary instance, run the `SHOW MASTER STATUS` command.

      Your output should be similar to the following output.

```
File                        Position
-------------------------------------
mysql-bin-changelog.000031      107
-------------------------------------
```

      Note the file and position in your output.

   b. On each read replica, use the file and position information from its source instance in the previous step to run the following query:

      For version 3

```
SELECT SOURCE_POS_WAIT('file', position);
```

      For version 2

```
SELECT MASTER_POS_WAIT('file', position);
```

      For example, if the file name is `mysql-bin-changelog.000031` and the position is `107`, run the following statement:

      For version 3

```
SELECT SOURCE_POS_WAIT('mysql-bin-changelog.000031', 107);
```

      For version 2

```
SELECT MASTER_POS_WAIT('mysql-bin-changelog.000031', 107);
```

5. Reset the GTID parameters to disable GTID-based replication.

a. Make sure that the DB cluster parameter group associated with the Aurora MySQL cluster has the following parameter settings:

   - `gtid_mode` – `OFF`
   - `enforce_gtid_consistency` – `OFF`

b. Restart the Aurora MySQL DB cluster.

Configure delayed replication with Amazon Aurora MySQL

You can use delayed replication as a strategy for disaster recovery with Aurora MySQL. With delayed replication, you specify the minimum amount of time, in seconds, to delay replication from the source to the read replica. In the event of a disaster, such as a table deleted unintentionally, you complete the following steps to recover from the disaster quickly:

1. Stop replication to the read replica before the source sends the change that caused the disaster. Use the mysql.rds_stop_replication stored procedure to stop replication.
2. Start replication and specify that replication stops automatically at a log file location. You specify a location just before the disaster using the mysql.rds_start_replication_until(Aurora MySQL version 3) stored procedure.
3. Promote the read replica to be the new source DB cluster by using the instructions in Promoting a read replica to a DB cluster for Aurora MySQL.

> **Note**
>
> Aurora MySQL supports delayed replication for version 8.4.8 and higher.
>
> - Use stored procedures to configure delayed replication. You can't configure delayed replication with the Amazon Web Services Management Console, the Amazon CLI, or the Amazon RDS API.
> - You can use replication based on global transaction identifiers (GTIDs) in a delayed replication configuration on Aurora MySQL version 8.4.8 and higher.
> - If you use GTID-based replication, use the mysql.rds_start_replication_until_gtid(Aurora MySQL version 3) stored procedure instead of the mysql.rds_start_replication_until(Aurora MySQL version 3) stored procedure.

- Aurora MySQL supports multi-source replication with up to 15 channels. Use the `_for_channel` procedure variants to configure delayed replication on specific channels.

Topics

- Use cases for delayed replication
- Configure external replication with a delay
- Modify delayed replication for an existing read replica
- Set a location to stop replication to a read replica
- Promote a read replica
- Related topics

Use cases for delayed replication

Delayed replication on Aurora MySQL applies to binary log based replication. This includes replication from an Aurora MySQL writer DB cluster to a binlog replica, from an external MySQL source into an Aurora MySQL DB cluster, or across multi-source replication channels. It does not apply to Aurora Replicas within a single DB cluster, because those read from shared cluster storage rather than from the binary log. Common use cases include the following:

- **Disaster recovery from operator error** – Maintain a binlog replica that lags the source by a set interval. If a destructive statement runs unintentionally (for example, dropping a table), stop replication on the delayed replica before the source applies the change. Then roll forward to just before the event using mysql.rds_start_replication_until(Aurora MySQL version 3) or mysql.rds_start_replication_until_gtid(Aurora MySQL version 3). Finally, promote the replica. This approach provides a faster recovery path than point-in-time recovery, which requires crash recovery and binary log replay.
- **Protection against logical data corruption** – A delayed replica also guards against a faulty application deployment or migration that gradually corrupts data. Because the replica holds the pre-corruption state for the length of the delay, you can recover before the faulty transactions are applied.
- **Major version and blue/green upgrades** – Keep a delayed binlog replica during an upgrade or blue/green deployment as a safety net, so that you can fall back to a known-good state if the upgrade introduces problems.

- **Change data capture (CDC) from an external source** – When you ingest changes into an Aurora MySQL DB cluster from an external MySQL source, an intentional delay gives you a controlled buffer before changes are applied downstream.
- **Historical inspection without a restore** – Query the delayed replica to see what your data looked like at an earlier time. This is useful for debugging, auditing, or investigating what changed, without provisioning a clone or running a point-in-time restore.
- **Testing application behavior under replication lag** – Use an artificially inflated delay to validate how your application behaves when a replica lags, and to run regression tests for lag-sensitive conditions, without having to generate heavy load to reproduce the lag.

Configure external replication with a delay

To configure an external source with delayed replication, use the mysql.rds_set_external_source_with_delay (Aurora MySQL version 8.4.8 and higher) stored procedure. For more information about all replication stored procedures, see Configuring, starting, and stopping binary log (binlog) replication.

Example (default channel):

```
CALL mysql.rds_set_external_source_with_delay(
  'source-host.example.com',
  3306,
  'repl_user',
  'repl_password',
  'mysql-bin-changelog.000001',
  120,
  0,
  3600);
```

Example (specific channel):

```
CALL mysql.rds_set_external_source_with_delay_for_channel(
  'source-host.example.com',
  3306,
  'repl_user',
  'repl_password',
  'mysql-bin-changelog.000001',
  120,
  0,
  3600,
```

```
  'channel_1');
```

Parameters:

host_name

The host name or IP address of the external source.

host_port

The port number of the external source.

replication_user_name

The replication user on the external source.

replication_user_password

The password for the replication user.

mysql_binary_log_file_name

The name of the binary log file on the external source.

mysql_binary_log_file_location

The position in the binary log file to begin replication.

ssl_encryption

Set this parameter to 1 to enable SSL encryption for the replication connection, or to `0` to disable SSL encryption.

delay

The minimum delay in seconds (0–259,200).

channel

(for_channel variant only) The channel name for multi-source replication.

Constraints:

- Aurora MySQL supports a maximum of 15 replication channels.
- Each channel must replicate from a different source (host:port combination).
- The delay must be between 0 and 259,200 seconds (72 hours).
- Stop replication before modifying the channel configuration.

Modify delayed replication for an existing read replica

To modify delayed replication for an existing read replica, run the mysql.rds_set_source_delay (Aurora MySQL version 8.4.8 and higher) stored procedure. For more information about all replication stored procedures, see Configuring, starting, and stopping binary log (binlog) replication.

To modify delayed replication for an existing read replica:

1. Using a MySQL client, connect to the read replica as the admin user.
2. Use the mysql.rds_stop_replication stored procedure to stop replication.
3. Run the mysql.rds_set_source_delay (Aurora MySQL version 8.4.8 and higher) stored procedure.
4. Use the mysql.rds_start_replication stored procedure to start replication.

Example (default channel):

```
CALL mysql.rds_set_source_delay(3600);
```

Example (specific channel):

```
CALL mysql.rds_set_source_delay_for_channel(3600, 'channel_1');
```

This specifies that replication to the read replica is delayed by at least one hour (3,600 seconds). The delay value must be between 0 and 259,200 seconds (72 hours).

> **Note**
>
> Stop replication before setting the delay. If replication is running, you receive an error that asks you to call mysql.rds_stop_replication (or `mysql.rds_stop_replication_for_channel` for a specific channel) first.

Set a location to stop replication to a read replica

After stopping replication to the read replica, you can start replication and then stop it at a specified binary log file location using the mysql.rds_start_replication_until(Aurora MySQL version 3) stored procedure.

To start replication and stop at a specific location:

1. Using a MySQL client, connect to the read replica as the admin user.
2. Run the mysql.rds_start_replication_until(Aurora MySQL version 3) stored procedure.

Example:

```
CALL mysql.rds_start_replication_until(
  'mysql-bin-changelog.000777',
  120);
```

This initiates replication and replicates changes until it reaches location 120 in the `mysql-bin-changelog.000777` binary log file. In a disaster recovery scenario, assume that location 120 is just before the disaster.

Replication stops automatically when Aurora MySQL reaches the stop point. Aurora MySQL generates the following event: `Replication has been stopped since the replica reached the stop point specified by the rds_start_replication_until stored procedure`.

If you are using GTID-based replication, use the mysql.rds_start_replication_until_gtid(Aurora MySQL version 3) stored procedure instead.

Promote a read replica

After replication is stopped, in a disaster recovery scenario, you can promote a read replica to be the new source DB cluster. For information about promoting a read replica, see Promoting a read replica to a DB cluster for Aurora MySQL.

Related topics

- For a complete reference of all replication stored procedures, see Configuring, starting, and stopping binary log (binlog) replication.

Configure multi-source replication for Amazon Aurora MySQL

With multi-source replication, you can set up an Amazon Aurora MySQL DB cluster as a replica that receives binary log events from more than one source MySQL database. Each source can be an RDS

for MySQL DB instance, another Aurora MySQL DB cluster, or a MySQL database running external to Amazon RDS.

Multi-source replication is supported for Aurora MySQL DB clusters running the following engine versions:

- Aurora MySQL 8.4.8 and above

For more information about MySQL multi-source replication, see MySQL Multi-Source Replication in the MySQL documentation.

> **Note**
>
> Multi-source replication on Aurora MySQL uses the writer (primary) instance of the Aurora DB cluster as the replication target. All replication stored procedures must be called while connected to the writer instance of the cluster.

Use cases for multi-source replication

Consider using multi-source replication on Aurora MySQL in the following cases:

- **Shard consolidation** – Applications that need to merge or combine data from multiple shards hosted on separate DB instances into a single Aurora MySQL DB cluster.
- **Consolidated reporting** – Applications that need to generate reports from data consolidated from multiple sources, taking advantage of Aurora's read scaling capabilities.
- **Long-term backups** – Requirements to create consolidated long-term backups of data that's distributed among multiple MySQL-compatible DB instances.
- **Cross-engine migration** – Consolidating data from multiple RDS for MySQL instances or external MySQL servers into a single Aurora MySQL cluster during migration.
- **Multi-tenant aggregation** – Consolidating multiple single-tenant databases into a multi-tenant Aurora cluster for cost optimization and simplified management.

Prerequisites for multi-source replication

Before you configure multi-source replication on your Aurora MySQL DB cluster, complete the standard prerequisites for binary log replication as described in Setting up binary log replication

for Aurora MySQL. This includes enabling binary logging on each source, retaining binary logs, creating a replication user, and creating a copy or dump of each source. For multi-source replication, repeat these steps for each source DB instance.

In addition to the standard prerequisites, ensure that you meet the following requirements specific to multi-source replication.

- Verify the Aurora MySQL target cluster version and configuration
  - The Aurora MySQL DB cluster must be running a supported engine version (Aurora MySQL 8.4.8 and above).
  - Enable autocommit on the Aurora MySQL writer instance. Set the `autocommit` parameter to 1 in your DB cluster parameter group.
- Configure network connectivity for each source

  For each source DB instance, ensure that the Aurora MySQL writer instance can connect to the source on the specified port. Options include:
  - If both source and target are in the same VPC, configure the security group on the source DB instance to allow inbound connections on port 3306 (or your custom port) from the Aurora MySQL cluster's security group.
  - If they are in different VPCs, set up VPC peering or use a transit gateway. For more information, see A DB cluster in a VPC accessed by an EC2 instance in a different VPC.
  - If the source is external to Amazon, ensure network routes are available (for example, through or a VPN connection).

> **Note**
>
> Because multi-source replication involves multiple sources, you must verify connectivity to each source independently. Ensure that security groups and routing accommodate all source endpoints simultaneously.

Configure multi-source replication channels on Aurora MySQL DB clusters

Configuring multi-source replication channels on Aurora MySQL is similar to configuring single-source replication. For multi-source replication, you first enable binary logging on the source

instances, import data from the sources to the Aurora MySQL cluster, and then start replication from each source using the binary log coordinates or GTID auto-positioning.

> **Important**
>
> All multi-source replication stored procedures must be called while connected to the **writer instance** of the Aurora MySQL DB cluster. If a failover occurs, you must reconnect to the new writer instance.

Step 1: Import data from the source DB instances to the Aurora MySQL cluster

Perform the following steps for each source DB instance.

1. Determine the current binary log file and position on the source DB instance.

For MySQL 8.4

```
SHOW BINARY LOG STATUS;
```

For MySQL 8.0 and earlier

```
SHOW MASTER STATUS;
```

Example output:

```
+----------------------------+----------+
| File                       | Position |
+----------------------------+----------+
| mysql-bin-changelog.000031 |      107 |
+----------------------------+----------+
```

Record the `File` and `Position` values. You need them in a later step.

2. Copy the database from the source DB instance to the Aurora MySQL cluster using `mysqldump`.

```
mysqldump --databases database_name \
  --single-transaction \
  --compress \
  --order-by-primary \
  -u RDS_user_name \
```

```
  -p'RDS_password' \
  --host=source-endpoint.region.rds.amazonaws.com | mysql \
  --host=aurora-cluster-endpoint.cluster-xxxxxx.region.rds.amazonaws.com \
  --port=3306 \
  -u aurora_user_name \
  -p'aurora_password'
```

> **Tip**
>
> For large databases, consider using Amazon DMS or creating a snapshot and restoring to reduce data transfer time.

3. After the data import is complete, you can re-enable writes on the source DB instance if you had previously set it to read-only.

Step 2: Start replication from the source DB instances to the Aurora MySQL cluster

For each source DB instance, connect to the **writer instance** of the Aurora MySQL DB cluster and run the stored procedures to configure and start replication on a channel.

Option A: Using binary log file position

```
CALL mysql.rds_set_external_source_for_channel(
  'source-endpoint.region.rds.amazonaws.com',
  3306,
  'repl_user',
  'password',
  'mysql-bin-changelog.000031',
  107,
  0,
  'channel_1'
);

CALL mysql.rds_start_replication_for_channel('channel_1');
```

Option B: Using GTID auto-positioning

If your source DB instances use GTID-based replication, you can use auto-positioning instead of specifying binary log coordinates:

```
CALL mysql.rds_set_external_source_with_auto_position_for_channel(
```

```
  'source-endpoint.region.rds.amazonaws.com',
  3306,
  'repl_user',
  'password',
  0,
  0,
  'channel_1'
);

CALL mysql.rds_start_replication_for_channel('channel_1');
```

> **Note**
>
> When using GTID auto-positioning, ensure that the `gtid_mode` and `enforce_gtid_consistency` parameters are configured consistently across all source instances and the Aurora MySQL cluster.

Repeat these steps for each source DB instance, specifying a unique channel name for each (for example, `channel_1`, `channel_2`, `channel_3`).

Use filters with multi-source replication

You can use replication filters to specify which databases and tables are replicated to the Aurora MySQL multi-source replica. For more information about replication filters, see Configuring replication filters with Aurora MySQL. The following describes additional channel-level filter capabilities available with multi-source replication.

With multi-source replication, you can configure replication filters at two levels:

- **Global filters** – Apply to all channels. Set using the Aurora MySQL DB cluster parameter group (for example, `replicate-do-db`, `replicate-ignore-db`).
- **Channel-level filters** – Apply only to specific channels, overriding global filters for that channel.

Key behavior

- You must restart replication after changing channel-level filters.
- If no channel-specific filter is configured, Aurora MySQL applies the global filters for that channel.

- If a filter is applied both globally and at the channel level, only the channel-level filter is applied for that channel.

Monitor multi-source replication channels

You can monitor individual channels on an Aurora MySQL multi-source replica using the following methods.

Use SHOW REPLICA STATUS

Connect to the writer instance of the Aurora MySQL DB cluster and run:

```
-- View status for all channels
SHOW REPLICA STATUS\G

-- View status for a specific channel
SHOW REPLICA STATUS FOR CHANNEL 'channel_1'\G
```

Key fields to monitor:

Field	Description
`Replica_IO_Running`	Whether the I/O thread for the channel is running
`Replica_SQL_Running`	Whether the SQL thread for the channel is running
`Seconds_Behind_Source`	Replication lag in seconds for the channel
`Last_IO_Error`	Last I/O error encountered on the channel
`Last_SQL_Error`	Last SQL error encountered on the channel
`Source_Log_File`	The current binary log file being read from the source
`Exec_Source_Log_Pos`	The position in the binary log that the SQL thread has applied

Use CloudWatch metrics

Monitor the `ReplicationChannelLag` CloudWatch metric for each replication channel. This metric provides per-channel replication lag data with a 60-second period and is available for 15 days. To locate the replication channel lag, use the Aurora DB cluster instance identifier and the replication channel name as dimensions. You can configure CloudWatch alarms to receive notification when the lag exceeds a specific threshold. For more information, see Monitoring metrics in an Amazon Aurora cluster.

Manage multi-source replication stored procedures

For information about using stored procedures to set up and manage your multi-source replication channels, see Managing multi-source replication.

Considerations and best practices

For general replication optimization recommendations including binary log format, parallel workers, and Enhanced Binlog, see Optimizing binary log replication for Aurora MySQL. The following considerations are specific to multi-source replication.

Resource planning

When running multiple replication channels, the total number of replication threads allocated on the replica is: (`replica_parallel_workers` + 1 coordinator thread) × number of channels. For example, with the default `replica_parallel_workers` value of 4 and 10 channels, Aurora MySQL allocates 50 replication threads. Consider using a larger DB instance class (such as db.r6g.2xlarge or larger) based on your total source throughput and channel count. Each channel receives the same number of parallel workers. MySQL does not support setting different parallel worker counts per channel.

Avoiding conflicts

MySQL multi-source replication does not provide conflict detection or resolution. You must ensure that changes from different sources are non-conflicting. Common strategies include:

- Each source writes to a different database or set of tables.
- Use replication filters (`replicate-do-db`) to ensure each channel replicates only the databases it is responsible for.
- Use the `replicate-rewrite-db` option to remap a schema name from the source to a different name on the replica, if needed.

To prevent conflicting writes from applications connecting directly to the multi-source replica, enable read-only mode on the Aurora MySQL cluster: `CALL mysql.rds_set_read_only(1);`

Operational best practices

- **One channel at a time** – Perform management operations (such as configuration changes, skipping errors, or starting/stopping replication) on one channel at a time. Avoid concurrent changes to multiple channels from different connections.
- **Monitor per-channel lag** – Monitor replication lag for each channel using the `ReplicationChannelLag` CloudWatch metric.
- **Source failover handling** – If a source DB instance fails over (for example, an Amazon RDS Multi-AZ failover), the replication channel may stop with an I/O error. After the source is available again:
  - Call `mysql.rds_start_replication_for_channel` to resume replication.
  - If error 1236 occurs (log file not found), call `mysql.rds_next_source_log_for_channel` to advance to the next binary log file.
- **Aurora writer failover** – If the Aurora MySQL writer instance fails over to a reader, replication channel configurations are preserved on the cluster's shared storage. After failover completes, the replication threads are automatically restarted on the new writer instance.

Limitations

The following limitations are specific to Aurora MySQL multi-source replication. For general MySQL multi-source replication limitations (such as parallel worker configuration per channel), see MySQL Multi-Source Replication in the MySQL documentation.

- Multi-source replication is supported only on Aurora MySQL version 8.4.8 and higher.
- Aurora MySQL supports configuring a maximum of **15 channels** for a multi-source replica.

Troubleshooting

For general replication troubleshooting, see Amazon Aurora MySQL replication issues. The following are multi-source replication specific troubleshooting notes.

Channel configuration not restored after snapshot restore

DB cluster snapshots don't include multi-source channel configurations. After you restore from a snapshot:

- Reconfigure each channel using `mysql.rds_set_external_source_for_channel` or `mysql.rds_set_external_source_with_auto_position_for_channel`.
- If using GTID auto-positioning, the replica can automatically resume from where it left off.
- If using binary log file positions, determine the current position by comparing the source's binary log with the last applied transaction on the restored cluster.

Replication lag increasing on one or more channels

- Check the writer instance's CPU and I/O metrics. If resource utilization is high, scale up the instance class.
- Consider increasing `replica_parallel_workers` to improve SQL thread throughput.
- Verify that there are no long-running transactions or DDL operations on the channel that might be blocking the SQL thread.
- Check for conflicting filter configurations that might cause replication to process and then discard large numbers of events.

Example: Complete multi-source setup with three sources

The following example demonstrates configuring an Aurora MySQL DB cluster as a multi-source replica of three RDS for MySQL source instances.

Step 1: Record binary log positions on each source

Connect to each source and record the binary log coordinates:

```
-- On source 1 (orders-db.xxxxx.us-east-1.rds.amazonaws.com)
SHOW BINARY LOG STATUS;
-- Result: mysql-bin-changelog.000045, Position: 3892

-- On source 2 (inventory-db.xxxxx.us-east-1.rds.amazonaws.com)
SHOW BINARY LOG STATUS;
-- Result: mysql-bin-changelog.000012, Position: 1567
```

```
-- On source 3 (analytics-db.xxxxx.us-east-1.rds.amazonaws.com)
SHOW BINARY LOG STATUS;
-- Result: mysql-bin-changelog.000078, Position: 9421
```

Step 2: Import data from each source

```
# Import from source 1
mysqldump --databases orders_db --single-transaction --compress \
 -u admin -p --host=orders-db.xxxxx.us-east-1.rds.amazonaws.com | \
 mysql --host=my-aurora-cluster.cluster-xxxxx.us-east-1.rds.amazonaws.com -u admin -p

# Import from source 2
mysqldump --databases inventory_db --single-transaction --compress \
 -u admin -p --host=inventory-db.xxxxx.us-east-1.rds.amazonaws.com | \
 mysql --host=my-aurora-cluster.cluster-xxxxx.us-east-1.rds.amazonaws.com -u admin -p

# Import from source 3
mysqldump --databases analytics_db --single-transaction --compress \
 -u admin -p --host=analytics-db.xxxxx.us-east-1.rds.amazonaws.com | \
 mysql --host=my-aurora-cluster.cluster-xxxxx.us-east-1.rds.amazonaws.com -u admin -p
```

Step 3: Configure and start replication channels

Connect to the Aurora MySQL writer instance:

```
-- Configure channel for source 1 (orders)
CALL mysql.rds_set_external_source_for_channel(
 'orders-db.xxxxx.us-east-1.rds.amazonaws.com',
 3306, 'repl_user', 'password',
 'mysql-bin-changelog.000045', 3892, 0, 'orders_channel'
);

-- Configure channel for source 2 (inventory)
CALL mysql.rds_set_external_source_for_channel(
 'inventory-db.xxxxx.us-east-1.rds.amazonaws.com',
 3306, 'repl_user', 'password',
 'mysql-bin-changelog.000012', 1567, 0, 'inventory_channel'
);

-- Configure channel for source 3 (analytics)
CALL mysql.rds_set_external_source_for_channel(
 'analytics-db.xxxxx.us-east-1.rds.amazonaws.com',
 3306, 'repl_user', 'password',
```

```
 'mysql-bin-changelog.000078', 9421, 0, 'analytics_channel'
);

-- Start all channels
CALL mysql.rds_start_replication_for_channel('orders_channel');
CALL mysql.rds_start_replication_for_channel('inventory_channel');
CALL mysql.rds_start_replication_for_channel('analytics_channel');
```

Step 4: Verify replication status

```
SHOW REPLICA STATUS\G
```

Confirm that for each channel:

- `Replica_IO_Running: Yes`
- `Replica_SQL_Running: Yes`
- `Seconds_Behind_Source: 0` (or a low value)

Related resources

- MySQL Multi-Source Replication – MySQL documentation
- Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication) – Aurora User Guide
- Optimizing binary log replication for Aurora MySQL – Aurora User Guide
- Configuring replication filters with Aurora MySQL – Aurora User Guide
- Using GTID-based replication – Aurora User Guide

Using local write forwarding in an Amazon Aurora MySQL DB cluster

Local (in-cluster) write forwarding allows your applications to issue read/write transactions directly on an Aurora Replica. These transactions are then forwarded to the writer DB instance to be committed. You can use local write forwarding when your applications require *read-after-write consistency*, which is the ability to read the latest write in a transaction.

Read replicas receive updates asynchronously from the writer. Without write forwarding, you have to transact any reads that require read-after-write consistency on the writer DB instance. Or you have to develop complex custom application logic to take advantage of multiple read replicas for scalability. Your applications must fully split all read and write traffic, maintaining two sets of database connections to send the traffic to the correct endpoint. This development overhead complicates application design when the queries are part of a single logical session, or transaction, within the application. Moreover, because replication lag can differ among read replicas, it's difficult to achieve global read consistency across all instances in the database.

Write forwarding avoids the need to split those transactions or send them exclusively to the writer, which simplifies application development. This new capability makes it easy to achieve read scale for workloads that need to read the latest write in a transaction and aren't sensitive to write latency.

Local write forwarding is different from global write forwarding, which forwards writes from a secondary DB cluster to the primary DB cluster in an Aurora global database. You can use local write forwarding in a DB cluster that is part of an Aurora global database. For more information, see Using write forwarding in an Amazon Aurora global database.

Local write forwarding requires Aurora MySQL version 3.04 or higher, including version 8.4.

Topics

- Enabling local write forwarding
- Checking if a DB cluster has write forwarding enabled
- Application and SQL compatibility with write forwarding
- Isolation levels for write forwarding
- Read consistency for write forwarding
- Running multipart statements with write forwarding
- Transactions with write forwarding

- Configuration parameters for write forwarding
- Amazon CloudWatch metrics and Aurora MySQL status variables for write forwarding
- Identifying forwarded transactions and queries

Enabling local write forwarding

By default, local write forwarding isn't enabled for Aurora MySQL DB clusters. You enable local write forwarding at the cluster level, not at the instance level.

> **Important**
>
> You can also enable local write forwarding for cross-Region read replicas that use binary logging, but write operations aren't forwarded to the source Amazon Web Services Region. They're forwarded to the writer DB instance of the binlog read replica cluster.
> Use this method only if you have a use case for writing to the binlog read replica in the secondary Amazon Web Services Region. Otherwise, you might end up with a "split-brain" scenario where replicated datasets are inconsistent with each other.
> We recommend that you use global write forwarding with global databases, rather than local write forwarding on cross-Region read replicas, unless absolutely necessary. For more information, see Using write forwarding in an Amazon Aurora global database.

Console

Using the Amazon Web Services Management Console, select the **Turn on local write forwarding** check box under **Read replica write forwarding** when you create or modify a DB cluster.

Amazon CLI

To enable write forwarding with the Amazon CLI, use the `--enable-local-write-forwarding` option. This option works when you create a new DB cluster using the `create-db-cluster` command. It also works when you modify an existing DB cluster using the `modify-db-cluster` command. You can disable write forwarding by using the `--no-enable-local-write-forwarding` option with these same CLI commands.

The following example creates an Aurora MySQL DB cluster with write forwarding enabled.

```
aws rds create-db-cluster \
  --db-cluster-identifier write-forwarding-test-cluster \
```

```
  --enable-local-write-forwarding \
  --engine aurora-mysql \
  --engine-version 8.0.mysql_aurora.3.04.0 \
  --master-username myuser \
  --master-user-password mypassword \
  --backup-retention 1
```

You then create writer and reader DB instances so that you can use write forwarding. For more information, see Creating an Amazon Aurora DB cluster.

RDS API

To enable write forwarding using the Amazon RDS API, set the `EnableLocalWriteForwarding` parameter to `true`. This parameter works when you create a new DB cluster using the `CreateDBCluster` operation. It also works when you modify an existing DB cluster using the `ModifyDBCluster` operation. You can disable write forwarding by setting the `EnableLocalWriteForwarding` parameter to `false`.

Enabling write forwarding for database sessions

The `aurora_replica_read_consistency` parameter is a DB parameter and DB cluster parameter that enables write forwarding. You can specify `EVENTUAL`, `SESSION`, or `GLOBAL` for the read consistency level. To learn more about consistency levels, see Read consistency for write forwarding.

The following rules apply to this parameter:

- The default value is '' (null).
- Write forwarding is available only if you set `aurora_replica_read_consistency` to `EVENTUAL`, `SESSION`, or `GLOBAL`. This parameter is relevant only in reader instances of DB clusters that have write forwarding enabled.
- You can't set this parameter (when empty) or unset it (when already set) inside a multistatement transaction. You can change it from one valid value to another valid value during such a transaction, but we don't recommend this action.

Checking if a DB cluster has write forwarding enabled

To determine that you can use write forwarding in a DB cluster, confirm that the cluster has the attribute `LocalWriteForwardingStatus` set to `enabled`.

In the Amazon Web Services Management Console, on the **Configuration** tab of the details page for the cluster, you see the status **Enabled** for **Local read replica write forwarding**.

To see the status of the write forwarding setting for all of your clusters, run the following Amazon CLI command.

Example

```
aws rds describe-db-clusters \
--query '*[].
{DBClusterIdentifier:DBClusterIdentifier,LocalWriteForwardingStatus:LocalWriteForwardingStatus}

[
    {
        "LocalWriteForwardingStatus": "enabled",
        "DBClusterIdentifier": "write-forwarding-test-cluster-1"
    },
    {
        "LocalWriteForwardingStatus": "disabled",
        "DBClusterIdentifier": "write-forwarding-test-cluster-2"
    },
    {
        "LocalWriteForwardingStatus": "requested",
        "DBClusterIdentifier": "test-global-cluster-2"
    },
    {
        "LocalWriteForwardingStatus": "null",
        "DBClusterIdentifier": "aurora-mysql-v2-cluster"
    }
]
```

A DB cluster can have the following values for `LocalWriteForwardingStatus`:

- `disabled` – Write forwarding is disabled.
- `disabling` – Write forwarding is in the process of being disabled.
- `enabled` – Write forwarding is enabled.
- `enabling` – Write forwarding is in the process of being enabled.
- `null` – Write forwarding isn't available for this DB cluster.
- `requested` – Write forwarding has been requested, but is not yet active.

Application and SQL compatibility with write forwarding

You can use the following kinds of SQL statements with write forwarding:

- Data manipulation language (DML) statements, such as `INSERT`, `DELETE`, and `UPDATE`. There are some restrictions on the properties of these statements that you can use with write forwarding, as described following.
- `SELECT ... LOCK IN SHARE MODE` and `SELECT FOR UPDATE` statements.
- `PREPARE` and `EXECUTE` statements.

Certain statements aren't allowed or can produce stale results when you use them in a DB cluster with write forwarding. In addition, user defined functions and user defined procedures aren't supported. Thus, the `EnableLocalWriteForwarding` setting is disabled by default for DB clusters. Before enabling it, check to make sure that your application code isn't affected by any of these restrictions.

The following restrictions apply to the SQL statements you use with write forwarding.
In some cases, you can use the statements on DB clusters with write forwarding enabled. This approach works if write forwarding isn't enabled within the session by the `aurora_replica_read_consistency` configuration parameter. If you try to use a statement when it's not allowed because of write forwarding, then you will see an error message similar to the following:

```
ERROR 1235 (42000): This version of MySQL doesn't yet support 'operation with write
 forwarding'.
```

Data definition language (DDL)

Connect to the writer DB instance to run DDL statements. You can't run them from reader DB instances.

Updating a permanent table using data from a temporary table

You can use temporary tables on DB clusters with write forwarding enabled. However, you can't use a DML statement to modify a permanent table if the statement refers to a temporary table. For example, you can't use an `INSERT ... SELECT` statement that takes the data from a temporary table.

XA transactions

You can't use the following statements on a DB cluster when write forwarding is enabled within the session. You can use these statements on DB clusters that don't have write forwarding enabled, or within sessions where the `aurora_replica_read_consistency` setting is empty. Before enabling write forwarding within a session, check if your code uses these statements.

```
XA {START|BEGIN} xid [JOIN|RESUME]
XA END xid [SUSPEND [FOR MIGRATE]]
XA PREPARE xid
XA COMMIT xid [ONE PHASE]
XA ROLLBACK xid
XA RECOVER [CONVERT XID]
```

LOAD statements for permanent tables

You can't use the following statements on a DB cluster with write forwarding enabled.

```
LOAD DATA INFILE 'data.txt' INTO TABLE t1;
LOAD XML LOCAL INFILE 'test.xml' INTO TABLE t1;
```

Plugin statements

You can't use the following statements on a DB cluster with write forwarding enabled.

```
INSTALL PLUGIN example SONAME 'ha_example.so';
UNINSTALL PLUGIN example;
```

SAVEPOINT statements

You can't use the following statements on a DB cluster when write forwarding is enabled within the session. You can use these statements on DB clusters that don't have write forwarding enabled, or within sessions where the `aurora_replica_read_consistency` setting is blank. Check if your code uses these statements before enabling write forwarding within a session.

```
SAVEPOINT t1_save;
ROLLBACK TO SAVEPOINT t1_save;
RELEASE SAVEPOINT t1_save;
```

Isolation levels for write forwarding

In sessions that use write forwarding, you can only use the `REPEATABLE READ` isolation level. Although you can also use the `READ COMMITTED` isolation level with Aurora Replicas, that isolation level doesn't work with write forwarding. For information about the `REPEATABLE READ` and `READ COMMITTED` isolation levels, see Aurora MySQL isolation levels.

Read consistency for write forwarding

You can control the degree of read consistency on a DB cluster. The read consistency level determines how long the DB cluster waits before each read operation to ensure that some or all changes are replicated from the writer. You can adjust the read consistency level to make sure that all forwarded write operations from your session are visible in the DB cluster before any subsequent queries. You can also use this setting to make sure that queries on the DB cluster always see the most current updates from the writer. This setting also applies to queries submitted by other sessions or other clusters. To specify this type of behavior for your application, choose a value for the `aurora_replica_read_consistency` DB parameter or DB cluster parameter.

> **Important**
>
> Always set the `aurora_replica_read_consistency` DB parameter or DB cluster parameter when you want to forward writes. If you don't, then Aurora doesn't forward writes. This parameter has an empty value by default, so choose a specific value when you use this parameter. The `aurora_replica_read_consistency` parameter only affects DB clusters or instances that have write forwarding enabled.

As you increase the consistency level, your application spends more time waiting for changes to be propagated between DB instances. You can choose the balance between fast response time and making sure that changes made in other DB instances are fully available before your queries run.

You can specify the following values for the `aurora_replica_read_consistency` parameter:

- `EVENTUAL` – Results of write operations in the same session aren't visible until the write operation is performed on the writer DB instance. The query doesn't wait for the updated results to be available. Thus it might retrieve the older data or the updated data, depending on the timing of the statements and the amount of replication lag. This is the same consistency as for Aurora MySQL DB clusters that don't use write forwarding.

- SESSION – All queries that use write forwarding see the results of all changes made in that session. The changes are visible regardless of whether the transaction is committed. If necessary, the query waits for the results of forwarded write operations to be replicated.
- GLOBAL – A session sees all committed changes across all sessions and instances in the DB cluster. Each query might wait for a period that varies depending on the amount of session lag. The query proceeds when the DB cluster is up-to-date with all committed data from the writer, as of the time that the query began.

For information about the configuration parameters involved in write forwarding, see Configuration parameters for write forwarding.

Note

You can also use aurora_replica_read_consistency as a session variable, for example:

```
mysql> set aurora_replica_read_consistency = 'session';
```

Examples of using write forwarding

The following examples show the effects of the aurora_replica_read_consistency parameter on running INSERT statements followed by SELECT statements. The results can differ, depending on the value of aurora_replica_read_consistency and the timing of the statements.

To achieve higher consistency, you might wait briefly before issuing the SELECT statement. Or Aurora can automatically wait until the results finish replicating before proceeding with SELECT.

For information on setting DB parameters, see Parameter groups for Amazon Aurora.

Example with aurora_replica_read_consistency set to EVENTUAL

Running an INSERT statement, immediately followed by a SELECT statement, returns a value for COUNT(*) with the number of rows before the new row is inserted. Running the SELECT again a short time later returns the updated row count. The SELECT statements don't wait.

```
mysql> select count(*) from t1;
+----------+
```

```
| count(*) |
+----------+
|        5 |
+----------+
1 row in set (0.00 sec)

mysql> insert into t1 values (6); select count(*) from t1;
+----------+
| count(*) |
+----------+
|        5 |
+----------+
1 row in set (0.00 sec)

mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        6 |
+----------+
1 row in set (0.00 sec)
```

Example with `aurora_replica_read_consistency` set to `SESSION`

A `SELECT` statement immediately after an `INSERT` waits until the changes from the `INSERT` statement are visible. Subsequent `SELECT` statements don't wait.

```
mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        6 |
+----------+
1 row in set (0.01 sec)

mysql> insert into t1 values (6); select count(*) from t1; select count(*) from t1;
Query OK, 1 row affected (0.08 sec)
+----------+
| count(*) |
+----------+
|        7 |
+----------+
1 row in set (0.37 sec)
```

```
+----------+
| count(*) |
+----------+
|        7 |
+----------+
1 row in set (0.00 sec)
```

With the read consistency setting still set to SESSION, introducing a brief wait after performing an INSERT statement makes the updated row count available by the time the next SELECT statement runs.

```
mysql> insert into t1 values (6); select sleep(2); select count(*) from t1;
Query OK, 1 row affected (0.07 sec)
+----------+
| sleep(2) |
+----------+
|        0 |
+----------+
1 row in set (2.01 sec)
+----------+
| count(*) |
+----------+
|        8 |
+----------+
1 row in set (0.00 sec)
```

Example with `aurora_replica_read_consistency` set to `GLOBAL`

Each SELECT statement waits for all data changes, as of the start time of the statement, to be visible before performing the query. The wait time for each SELECT statement varies, depending on the amount of replication lag.

```
mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        8 |
+----------+
1 row in set (0.75 sec)

mysql> select count(*) from t1;
+----------+
```

```
| count(*) |
+----------+
|        8 |
+----------+
1 row in set (0.37 sec)

mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        8 |
+----------+
1 row in set (0.66 sec)
```

Running multipart statements with write forwarding

A DML statement might consist of multiple parts, such as an `INSERT ... SELECT` statement or a `DELETE ... WHERE` statement. In this case, the entire statement is forwarded to the writer DB instance and run there.

Transactions with write forwarding

If the transaction access mode is set to read only, write forwarding isn't used. You can specify the access mode for the transaction by using the `SET TRANSACTION` statement or the `START TRANSACTION` statement. You can also specify the transaction access mode by changing the value of the transaction_read_only session variable. You can change this session value only while you're connected to a DB cluster that has write forwarding enabled.

If a long-running transaction doesn't issue any statement for a substantial period of time, it might exceed the idle timeout period. This period has a default of one minute. You can set the `aurora_fwd_writer_idle_timeout` parameter to increase it up to one day. A transaction that exceeds the idle timeout is canceled by the writer instance. The next subsequent statement you submit receives a timeout error. Then Aurora rolls back the transaction.

This type of error can occur in other cases when write forwarding becomes unavailable. For example, Aurora cancels any transactions that use write forwarding if you restart the DB cluster or if you disable write forwarding.

When a writer instance in a cluster using local write forwarding is restarted, any active, forwarded transactions and queries on reader instances using local write forwarding are automatically closed. After the writer instance is available again, you can retry these transactions.

Configuration parameters for write forwarding

The Aurora DB parameter groups include settings for the write forwarding feature. Details about these parameters are summarized in the following table, with usage notes after the table.

Parameter	Scope	Type	Default value	Valid values
aurora_fwd_writer_idle_timeout	Cluster	Unsigned integer	60	1–86,400
aurora_fwd_writer_max_connections_pct	Cluster	Unsigned long integer	10	0–90
aurora_replica_read_consistency	Cluster or instance	Enum	'' (null)	EVENTUAL, SESSION, GLOBAL

To control incoming write requests, use these settings:

- aurora_fwd_writer_idle_timeout – The number of seconds the writer DB instance waits for activity on a connection that's forwarded from a reader instance before closing it. If the session remains idle beyond this period, Aurora cancels the session.
- aurora_fwd_writer_max_connections_pct – The upper limit on database connections that can be used on a writer DB instance to handle queries forwarded from reader instances. It's expressed as a percentage of the max_connections setting for the writer. For example, if max_connections is 800 and aurora_fwd_master_max_connections_pct or aurora_fwd_writer_max_connections_pct is 10, then the writer allows a maximum of 80 simultaneous forwarded sessions. These connections come from the same connection pool managed by the max_connections setting.

  This setting applies only on the writer when it has write forwarding enabled. If you decrease the value, existing connections aren't affected. Aurora takes the new value of the setting into account when attempting to create a new connection from a DB cluster. The default value is 10, representing 10% of the max_connections value.

> **Note**
>
> Because `aurora_fwd_writer_idle_timeout` and `aurora_fwd_writer_max_connections_pct` are DB cluster parameters, all DB instances in each cluster have the same values for these parameters.

For more information about `aurora_replica_read_consistency`, see Read consistency for write forwarding.

For more information on DB parameter groups, see Parameter groups for Amazon Aurora.

Amazon CloudWatch metrics and Aurora MySQL status variables for write forwarding

The following Amazon CloudWatch metrics and Aurora MySQL status variables apply when you use write forwarding for Aurora MySQL. For more information about metrics for Aurora MySQL writer and reader DB instances, see the following topics.

Topics

- Metrics for write forwarding for Aurora MySQL writer DB instances
- Metrics for write forwarding for Aurora MySQL reader DB instances

Metrics for write forwarding for Aurora MySQL writer DB instances

The following Amazon CloudWatch metrics apply when you use write forwarding on one or more DB clusters. These metrics are all measured on the writer DB instance.

CloudWatch metric	Unit	Description
`ForwardingWriterDMLLatency`	Milliseconds	Average time to process each forwarded DML statement on the writer DB instance. It doesn't include the time for the DB cluster to forward the write request, or the time to

CloudWatch metric	Unit	Description
		replicate changes back to the writer.
`ForwardingWriterDMLThroughput`	Count per second	Number of forwarded DML statements processed each second by this writer DB instance.
`ForwardingWriterOpenSessions`	Count	Number of forwarded sessions on the writer DB instance.

The following Aurora MySQL status variables apply when you use write forwarding on one or more DB clusters. These status variables are all measured on the writer DB instance.

Aurora MySQL status variable	Unit	Description
`Aurora_fwd_writer_dml_stmt_count`	Count	Total number of DML statements forwarded to this writer DB instance.
`Aurora_fwd_writer_dml_stmt_duration`	Microseconds	Total duration of DML statements forwarded to this writer DB instance.
`Aurora_fwd_writer_open_sessions`	Count	Number of forwarded sessions on the writer DB instance.
`Aurora_fwd_writer_select_stmt_count`	Count	Total number of `SELECT` statements forwarded to this writer DB instance.

Aurora MySQL status variable	Unit	Description
`Aurora_fwd_writer_select_stmt_duration`	Microseconds	Total duration of `SELECT` statements forwarded to this writer DB instance.

Metrics for write forwarding for Aurora MySQL reader DB instances

The following CloudWatch metrics are measured on each reader DB instance in a DB cluster with write forwarding enabled.

CloudWatch metric	Unit	Description
`ForwardingReplicaDMLLatency`	Milliseconds	Average response time of forwarded DMLs on replica.
`ForwardingReplicaDMLThroughput`	Count per second	Number of forwarded DML statements processed each second.
`ForwardingReplicaOpenSessions`	Count	Number of sessions that are using write forwarding on a reader DB instance.
`ForwardingReplicaReadWaitLatency`	Milliseconds	Average wait time that a `SELECT` statement on a reader DB instance waits to catch up to the writer. The degree to which the reader DB instance waits before processing a query depends on the `aurora_replica_read_consistency` setting.

CloudWatch metric	Unit	Description
ForwardingReplicaReadWaitThroughput	Count per second	Total number of SELECT statements processed each second in all sessions that are forwarding writes.
ForwardingReplicaSelectLatency	Milliseconds	Forwarded SELECT latency, averaged over all forwarded SELECT statements within the monitoring period.
ForwardingReplicaSelectThroughput	Count per second	Forwarded SELECT throughput per second average within the monitoring period.

The following Aurora MySQL status variables are measured on each reader DB instance in a DB cluster with write forwarding enabled.

Aurora MySQL status variable	Unit	Description
Aurora_fwd_replica_dml_stmt_count	Count	Total number of DML statements forwarded from this reader DB instance.
Aurora_fwd_replica_dml_stmt_duration	Microseconds	Total duration of all DML statements forwarded from this reader DB instance.
Aurora_fwd_replica_errors_session_limit	Count	Number of sessions rejected by the primary cluster due to one of the following error conditions: • writer full

Aurora MySQL status variable	Unit	Description
		• Too many forwarded statements in progress.
`Aurora_fwd_replica_open_sessions`	Count	Number of sessions that are using write forwarding on a reader DB instance.
`Aurora_fwd_replica_read_wait_count`	Count	Total number of read-after-write waits on this reader DB instance.
`Aurora_fwd_replica_read_wait_duration`	Microseconds	Total duration of waits due to the read consistency setting on this reader DB instance.
`Aurora_fwd_replica_select_stmt_count`	Count	Total number of `SELECT` statements forwarded from this reader DB instance.
`Aurora_fwd_replica_select_stmt_duration`	Microseconds	Total duration of `SELECT` statements forwarded from this reader DB instance.

Identifying forwarded transactions and queries

You can use the `information_schema.aurora_forwarding_processlist` table to identify forwarded transactions and queries. For more information on this table, see information_schema.aurora_forwarding_processlist.

The following example shows all forwarded connections on a writer DB instance.

```
mysql> select * from information_schema.AURORA_FORWARDING_PROCESSLIST where
 IS_FORWARDED=1 order by REPLICA_SESSION_ID;
```

```
+-----+----------+-------------------+----------+---------+------+-------------
+-----------------------------------------+-------------+-------------------
+---------------------------------+---------------------+----------------+
| ID  | USER     | HOST              | DB       | COMMAND | TIME | STATE        |
 INFO                                    | IS_FORWARDED | REPLICA_SESSION_ID |
 REPLICA_INSTANCE_IDENTIFIER     | REPLICA_CLUSTER_NAME | REPLICA_REGION |
+-----+----------+-------------------+----------+---------+------+-------------
+-----------------------------------------+-------------+-------------------
+---------------------------------+--------------------------------------+
| 648 | myuser   | IP_address:port1   | sysbench | Query   |    0 | async commit |
 UPDATE sbtest58 SET k=k+1 WHERE id=4802579 |            1 |                637 | my-
db-cluster-instance-2        | my-db-cluster        | us-west-2      |
| 650 | myuser   | IP_address:port2   | sysbench | Query   |    0 | async commit |
 UPDATE sbtest54 SET k=k+1 WHERE id=2503953 |            1 |                639 | my-
db-cluster-instance-2        | my-db-cluster        | us-west-2      |
+-----+----------+-------------------+----------+---------+------+-------------
+-----------------------------------------+-------------+-------------------
+---------------------------------+---------------------+----------------+
```

On the forwarding reader DB instance, you can see the threads associated with these writer DB connections by running `SHOW PROCESSLIST`. The `REPLICA_SESSION_ID` values on the writer, 637 and 639, are the same as the `Id` values on the reader.

```
mysql> select @@aurora_server_id;

+---------------------------------+
| @@aurora_server_id              |
+---------------------------------+
| my-db-cluster-instance-2        |
+---------------------------------+
1 row in set (0.00 sec)

mysql> show processlist;

+-----+----------+-------------------+----------+---------+------+-------------
+-----------------------------------------+
| Id  | User     | Host              | db       | Command | Time | State        | Info
                                        |
+-----+----------+-------------------+----------+---------+------+-------------
+-----------------------------------------+
| 637 | myuser   | IP_address:port1   | sysbench | Query   |    0 | async commit |
 UPDATE sbtest12 SET k=k+1 WHERE id=4802579  |
```

```
| 639 | myuser   | IP_address:port2   | sysbench | Query   |    0 | async commit |
 UPDATE sbtest61 SET k=k+1 WHERE id=2503953  |
+-----+----------+--------------------+----------+---------+------+--------------
+-------------------------------------------+
12 rows in set (0.00 sec)
```

Integrating Amazon Aurora MySQL with other Amazon services

Amazon Aurora MySQL integrates with other Amazon services so that you can extend your Aurora MySQL DB cluster to use additional capabilities in the Amazon Cloud. Your Aurora MySQL DB cluster can use Amazon services to do the following:

- Synchronously or asynchronously invoke an Amazon Lambda function using the native functions `lambda_sync` or `lambda_async`. For more information, see Invoking a Lambda function from an Amazon Aurora MySQL DB cluster.
- Load data from text or XML files stored in an Amazon Simple Storage Service (Amazon S3) bucket into your DB cluster using the `LOAD DATA FROM S3` or `LOAD XML FROM S3` command. For more information, see Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket.
- Save data to text files stored in an Amazon S3 bucket from your DB cluster using the `SELECT INTO OUTFILE S3` command. For more information, see Saving data from an Amazon Aurora MySQL DB cluster into text files in an Amazon S3 bucket.
- Automatically add or remove Aurora Replicas with Application Auto Scaling. For more information, see Amazon Aurora Auto Scaling with Aurora Replicas.
- Perform sentiment analysis with Amazon Comprehend, or a wide variety of machine learning algorithms with SageMaker AI. For more information, see Using Amazon Aurora machine learning.

Aurora secures the ability to access other Amazon services by using Amazon Identity and Access Management (IAM). You grant permission to access other Amazon services by creating an IAM role with the necessary permissions, and then associating the role with your DB cluster. For details and instructions on how to permit your Aurora MySQL DB cluster to access other Amazon services on your behalf, see Authorizing Amazon Aurora MySQL to access other Amazon services on your behalf.

Authorizing Amazon Aurora MySQL to access other Amazon services on your behalf

For your Aurora MySQL DB cluster to access other services on your behalf, create and configure an Amazon Identity and Access Management (IAM) role. This role authorizes database users in your DB cluster to access other Amazon services. For more information, see Setting up IAM roles to access Amazon services.

You must also configure your Aurora DB cluster to allow outbound connections to the target Amazon service. For more information, see Enabling network communication from Amazon Aurora to other Amazon services.

If you do so, your database users can perform these actions using other Amazon services:

- Synchronously or asynchronously invoke an Amazon Lambda function using the native functions `lambda_sync` or `lambda_async`. Or, asynchronously invoke an Amazon Lambda function using the `mysql.lambda_async` procedure. For more information, see Invoking a Lambda function with an Aurora MySQL native function.
- Load data from text or XML files stored in an Amazon S3 bucket into your DB cluster by using the `LOAD DATA FROM S3` or `LOAD XML FROM S3` statement. For more information, see Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket.
- Save data from your DB cluster into text files stored in an Amazon S3 bucket by using the `SELECT INTO OUTFILE S3` statement. For more information, see Saving data from an Amazon Aurora MySQL DB cluster into text files in an Amazon S3 bucket.
- Export log data to Amazon CloudWatch Logs MySQL. For more information, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.
- Automatically add or remove Aurora Replicas with Application Auto Scaling. For more information, see Amazon Aurora Auto Scaling with Aurora Replicas.

Setting up IAM roles to access Amazon services

To permit your Aurora DB cluster to access another Amazon service, do the following:

1. Create an IAM policy that grants permission to the Amazon service. For more information, see the following topics.
   - Creating an IAM policy to access Amazon S3 resources
   - Creating an IAM policy to access Amazon Lambda resources
   - Creating an IAM policy to access CloudWatch Logs resources
   - Creating an IAM policy to access Amazon KMS resources
2. Create an IAM role and attach the policy that you created. For more information, see Creating an IAM role to allow Amazon Aurora to access Amazon services.
3. Associate that IAM role with your Aurora DB cluster. For more information, see Associating an IAM role with an Amazon Aurora MySQL DB cluster.

Creating an IAM policy to access Amazon S3 resources

Aurora can access Amazon S3 resources to either load data to or save data from an Aurora DB cluster. However, you must first create an IAM policy that provides the bucket and object permissions that allow Aurora to access Amazon S3.

The following table lists the Aurora features that can access an Amazon S3 bucket on your behalf, and the minimum required bucket and object permissions required by each feature.

Feature	Bucket permissions	Object permissions
LOAD DATA FROM S3	ListBucket	GetObject GetObjectVersion
LOAD XML FROM S3	ListBucket	GetObject GetObjectVersion
SELECT INTO OUTFILE S3	ListBucket	AbortMultipartUpload DeleteObject GetObject ListMultipartUploadParts PutObject

The following policy adds the permissions that might be required by Aurora to access an Amazon S3 bucket on your behalf.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "AllowAuroraToExampleBucket",
```

```
            "Effect": "Allow",
            "Action": [
                "s3:PutObject",
                "s3:GetObject",
                "s3:AbortMultipartUpload",
                "s3:ListBucket",
                "s3:DeleteObject",
                "s3:GetObjectVersion",
                "s3:ListMultipartUploadParts"
            ],
            "Resource": [
                "arn:aws-cn:s3:::amzn-s3-demo-bucket/*",
                "arn:aws-cn:s3:::amzn-s3-demo-bucket"
            ]
        }
    ]
}
```

Note

Make sure to include both entries for the `Resource` value. Aurora needs the permissions on both the bucket itself and all the objects inside the bucket.
Based on your use case, you might not need to add all of the permissions in the sample policy. Also, other permissions might be required. For example, if your Amazon S3 bucket is encrypted, you need to add `kms:Decrypt` permissions.

You can use the following steps to create an IAM policy that provides the minimum required permissions for Aurora to access an Amazon S3 bucket on your behalf. To allow Aurora to access all of your Amazon S3 buckets, you can skip these steps and use either the `AmazonS3ReadOnlyAccess` or `AmazonS3FullAccess` predefined IAM policy instead of creating your own.

To create an IAM policy to grant access to your Amazon S3 resources

1. Open the IAM Management Console.
2. In the navigation pane, choose **Policies**.
3. Choose **Create policy**.
4. On the **Visual editor** tab, choose **Choose a service**, and then choose **S3**.

5. For **Actions**, choose **Expand all**, and then choose the bucket permissions and object permissions needed for the IAM policy.

   Object permissions are permissions for object operations in Amazon S3, and need to be granted for objects in a bucket, not the bucket itself. For more information about permissions for object operations in Amazon S3, see Permissions for object operations.

6. Choose **Resources**, and choose **Add ARN** for **bucket**.

7. In the **Add ARN(s)** dialog box, provide the details about your resource, and choose **Add**.

   Specify the Amazon S3 bucket to allow access to. For instance, if you want to allow Aurora to access the Amazon S3 bucket named *amzn-s3-demo-bucket*, then set the Amazon Resource Name (ARN) value to `arn:aws-cn:s3:::`*amzn-s3-demo-bucket*.

8. If the **object** resource is listed, choose **Add ARN** for **object**.

9. In the **Add ARN(s)** dialog box, provide the details about your resource.

   For the Amazon S3 bucket, specify the Amazon S3 bucket to allow access to. For the object, you can choose **Any** to grant permissions to any object in the bucket.

   > **Note**
   >
   > You can set **Amazon Resource Name (ARN)** to a more specific ARN value in order to allow Aurora to access only specific files or folders in an Amazon S3 bucket. For more information about how to define an access policy for Amazon S3, see Managing access permissions to your Amazon S3 resources.

10. (Optional) Choose **Add ARN** for **bucket** to add another Amazon S3 bucket to the policy, and repeat the previous steps for the bucket.

    > **Note**
    >
    > You can repeat this to add corresponding bucket permission statements to your policy for each Amazon S3 bucket that you want Aurora to access. Optionally, you can also grant access to all buckets and objects in Amazon S3.

11. Choose **Review policy**.

12. For **Name**, enter a name for your IAM policy, for example `AllowAuroraToExampleBucket`. You use this name when you create an IAM role to associate with your Aurora DB cluster. You can also add an optional **Description** value.
13. Choose **Create policy**.
14. Complete the steps in Creating an IAM role to allow Amazon Aurora to access Amazon services.

Creating an IAM policy to access Amazon Lambda resources

You can create an IAM policy that provides the minimum required permissions for Aurora to invoke an Amazon Lambda function on your behalf.

The following policy adds the permissions required by Aurora to invoke an Amazon Lambda function on your behalf.

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Sid": "AllowAuroraToExampleFunction",
      "Effect": "Allow",
      "Action": "lambda:InvokeFunction",
      "Resource": "arn:aws-cn:lambda:us-
east-1:123456789012:function:example_function"
    }
  ]
}
```

You can use the following steps to create an IAM policy that provides the minimum required permissions for Aurora to invoke an Amazon Lambda function on your behalf. To allow Aurora to invoke all of your Amazon Lambda functions, you can skip these steps and use the predefined `AWSLambdaRole` policy instead of creating your own.

To create an IAM policy to grant invoke to your Amazon Lambda functions

1. Open the IAM console.

2. In the navigation pane, choose **Policies**.
3. Choose **Create policy**.
4. On the **Visual editor** tab, choose **Choose a service**, and then choose **Lambda**.
5. For **Actions**, choose **Expand all**, and then choose the Amazon Lambda permissions needed for the IAM policy.

   Ensure that `InvokeFunction` is selected. It is the minimum required permission to enable Amazon Aurora to invoke an Amazon Lambda function.
6. Choose **Resources** and choose **Add ARN** for **function**.
7. In the **Add ARN(s)** dialog box, provide the details about your resource.

   Specify the Lambda function to allow access to. For instance, if you want to allow Aurora to access a Lambda function named `example_function`, then set the ARN value to `arn:aws-cn:lambda:::function:example_function`.

   For more information on how to define an access policy for Amazon Lambda, see Authentication and access control for Amazon Lambda.
8. Optionally, choose **Add additional permissions** to add another Amazon Lambda function to the policy, and repeat the previous steps for the function.

   > **Note**
   >
   > You can repeat this to add corresponding function permission statements to your policy for each Amazon Lambda function that you want Aurora to access.
9. Choose **Review policy**.
10. Set **Name** to a name for your IAM policy, for example `AllowAuroraToExampleFunction`. You use this name when you create an IAM role to associate with your Aurora DB cluster. You can also add an optional **Description** value.
11. Choose **Create policy**.
12. Complete the steps in Creating an IAM role to allow Amazon Aurora to access Amazon services.

Creating an IAM policy to access CloudWatch Logs resources

Aurora can access CloudWatch Logs to export audit log data from an Aurora DB cluster. However, you must first create an IAM policy that provides the log group and log stream permissions that allow Aurora to access CloudWatch Logs.

The following policy adds the permissions required by Aurora to access Amazon CloudWatch Logs on your behalf, and the minimum required permissions to create log groups and export data.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "EnableCreationAndManagementOfRDSCloudwatchLogEvents",
            "Effect": "Allow",
            "Action": [
                "logs:GetLogEvents",
                "logs:PutLogEvents"
            ],
            "Resource": "arn:aws-cn:logs:*:*:log-group:/aws/rds/*:log-stream:*"
        },
        {
            "Sid":
 "EnableCreationAndManagementOfRDSCloudwatchLogGroupsAndStreams",
            "Effect": "Allow",
            "Action": [
                "logs:CreateLogStream",
                "logs:DescribeLogStreams",
                "logs:PutRetentionPolicy",
                "logs:CreateLogGroup"
            ],
            "Resource": "arn:aws-cn:logs:*:*:log-group:/aws/rds/*"
        }
    ]
}
```

You can modify the ARNs in the policy to restrict access to a specific Amazon Region and account.

You can use the following steps to create an IAM policy that provides the minimum required permissions for Aurora to access CloudWatch Logs on your behalf. To allow Aurora full access to CloudWatch Logs, you can skip these steps and use the `CloudWatchLogsFullAccess` predefined IAM policy instead of creating your own. For more information, see Using identity-based policies (IAM policies) for CloudWatch Logs in the *Amazon CloudWatch User Guide.*

To create an IAM policy to grant access to your CloudWatch Logs resources

1. Open the IAM console.
2. In the navigation pane, choose **Policies**.
3. Choose **Create policy**.
4. On the **Visual editor** tab, choose **Choose a service**, and then choose **CloudWatch Logs**.
5. For **Actions**, choose **Expand all**, and then choose the Amazon CloudWatch Logs permissions needed for the IAM policy.

   Ensure that the following permissions are selected:

   - `CreateLogGroup`
   - `CreateLogStream`
   - `DescribeLogStreams`
   - `GetLogEvents`
   - `PutLogEvents`
   - `PutRetentionPolicy`
6. Choose **Resources** and choose **Add ARN** for **log-group**.
7. In the **Add ARN(s)** dialog box, enter the following values:

   - **Region** – An Amazon Region or *
   - **Account** – An account number or *
   - **Log Group Name** – `/aws/rds/*`
8. In the **Add ARN(s)** dialog box, choose **Add**.
9. Choose **Add ARN** for **log-stream**.
10. In the **Add ARN(s)** dialog box, enter the following values:

    - **Region** – An Amazon Region or *
    - **Account** – An account number or *

- **Log Group Name** – `/aws/rds/*`
- **Log Stream Name** – *

11. In the **Add ARN(s)** dialog box, choose **Add**.
12. Choose **Review policy**.
13. Set **Name** to a name for your IAM policy, for example `AmazonRDSCloudWatchLogs`. You use this name when you create an IAM role to associate with your Aurora DB cluster. You can also add an optional **Description** value.
14. Choose **Create policy**.
15. Complete the steps in Creating an IAM role to allow Amazon Aurora to access Amazon services.

Creating an IAM policy to access Amazon KMS resources

Aurora can access the Amazon KMS keys used for encrypting their database backups. However, you must first create an IAM policy that provides the permissions that allow Aurora to access KMS keys.

The following policy adds the permissions required by Aurora to access KMS keys on your behalf.

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Sid": "AllowAuroraToAccessKey",
      "Effect": "Allow",
      "Action": [
        "kms:Decrypt"
      ],
      "Resource": "arn:aws-cn:kms:us-east-1:123456789012:key/key-ID"
    }
  ]
}
```

You can use the following steps to create an IAM policy that provides the minimum required permissions for Aurora to access KMS keys on your behalf.

To create an IAM policy to grant access to your KMS keys

1. Open the IAM console.
2. In the navigation pane, choose **Policies**.
3. Choose **Create policy**.
4. On the **Visual editor** tab, choose **Choose a service**, and then choose **KMS**.
5. For **Actions**, choose **Write**, and then choose **Decrypt**.
6. Choose **Resources**, and choose **Add ARN**.
7. In the **Add ARN(s)** dialog box, enter the following values:
   - **Region** – Type the Amazon Region, such as `us-west-2`.
   - **Account** – Type the user account number.
   - **Log Stream Name** – Type the KMS key identifier.
8. In the **Add ARN(s)** dialog box, choose **Add**.
9. Choose **Review policy**.
10. Set **Name** to a name for your IAM policy, for example `AmazonRDSKMSKey`. You use this name when you create an IAM role to associate with your Aurora DB cluster. You can also add an optional **Description** value.
11. Choose **Create policy**.
12. Complete the steps in Creating an IAM role to allow Amazon Aurora to access Amazon services.

Creating an IAM role to allow Amazon Aurora to access Amazon services

After creating an IAM policy to allow Aurora to access Amazon resources, you must create an IAM role and attach the IAM policy to the new IAM role.

To create an IAM role to permit your Amazon RDS cluster to communicate with other Amazon services on your behalf, take the following steps.

To create an IAM role to allow Amazon RDS to access Amazon services

1. Open the IAM console.
2. In the navigation pane, choose **Roles**.
3. Choose **Create role**.

4. Under **Amazon service**, choose **RDS**.
5. Under **Select your use case**, choose **RDS – Add Role to Database**.
6. Choose **Next**.
7. On the **Permissions policies** page, enter the name of your policy in the **Search** field.
8. When it appears in the list, select the policy that you defined earlier using the instructions in one of the following sections:

   - Creating an IAM policy to access Amazon S3 resources
   - Creating an IAM policy to access Amazon Lambda resources
   - Creating an IAM policy to access CloudWatch Logs resources
   - Creating an IAM policy to access Amazon KMS resources
9. Choose **Next**.
10. In **Role name**, enter a name for your IAM role, for example `RDSLoadFromS3`. You can also add an optional **Description** value.
11. Choose **Create Role**.
12. Complete the steps in Associating an IAM role with an Amazon Aurora MySQL DB cluster.

Associating an IAM role with an Amazon Aurora MySQL DB cluster

To permit database users in an Amazon Aurora DB cluster to access other Amazon services, you associate the IAM role that you created in Creating an IAM role to allow Amazon Aurora to access Amazon services with that DB cluster. You can also have Amazon create a new IAM role by associating the service directly.

To associate an IAM role with a DB cluster you do two things:

1. Add the role to the list of associated roles for a DB cluster by using the RDS console, the add-role-to-db-cluster Amazon CLI command, or the AddRoleToDBCluster RDS API operation.

   You can add a maximum of five IAM roles for each Aurora DB cluster.
2. Set the cluster-level parameter for the related Amazon service to the ARN for the associated IAM role.

   The following table describes the cluster-level parameter names for the IAM roles used to access other Amazon services.

Cluster-level parameter	Description	
aws_default_lambda_role	Used when invoking a Lambda function from your DB cluster.	
aws_default_logs_role	Used when publishing log data from your DB cluster to Amazon CloudWatch Logs with the server_audit_logs_upload parameter. For more information about publishing log data to Amazon CloudWatch Logs, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.	
aws_default_s3_role	Used when invoking the LOAD DATA FROM S3, LOAD XML FROM S3, or SELECT INTO OUTFILE S3 statement from your DB cluster. In Aurora MySQL version 2, the IAM role specified in this parameter is used if an IAM role isn't specified for aurora_load_from_s3_role or aurora_select_into_s3_role for the appropriate statement. In Aurora MySQL version 3 and version 8.4, the IAM role specified for this parameter is always used.	


Cluster-level parameter	Description	
aurora_load_from_s3_role	Used when invoking the LOAD DATA FROM S3 or LOAD XML FROM S3 statement from your DB cluster. If an IAM role is not specified for this parameter, the IAM role specified in aws_default_s3_role is used. In Aurora MySQL version 3 and version 8.4, this parameter isn't available.	
aurora_select_into_s3_role	Used when invoking the SELECT INTO OUTFILE S3 statement from your DB cluster. If an IAM role is not specified for this parameter, the IAM role specified in aws_default_s3_role is used. In Aurora MySQL version 3 and version 8.4, this parameter isn't available.	

To associate an IAM role to permit your Amazon RDS cluster to communicate with other Amazon services on your behalf, take the following steps.

Console

To associate an IAM role with an Aurora DB cluster using the console

1. Open the RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose the name of the Aurora DB cluster that you want to associate an IAM role with to show its details.
4. On the **Connectivity & security** tab, in the **Manage IAM roles** section, do one of the following:
   - **Select IAM roles to add to this cluster** (default)
   - **Select a service to connect to this cluster**

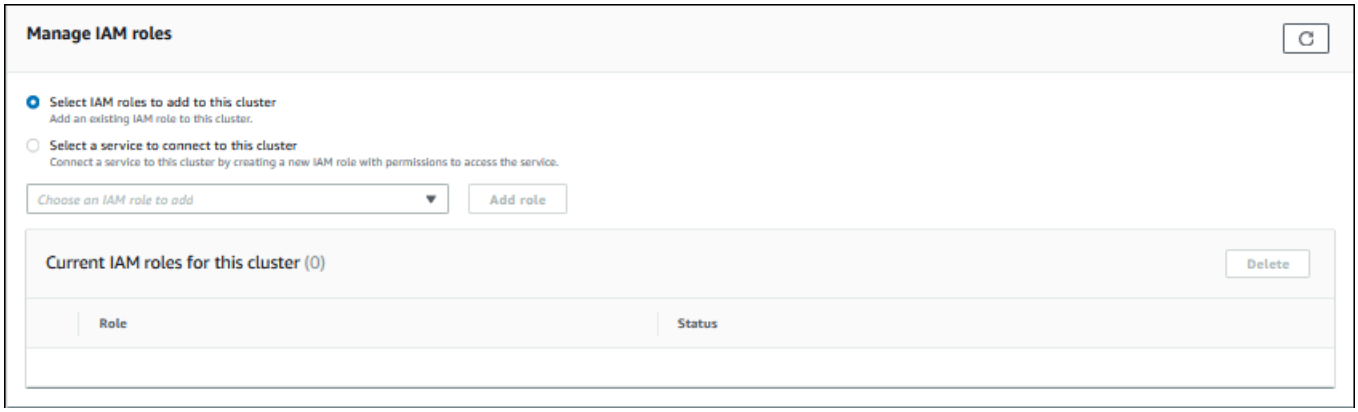

5. To use an existing IAM role, choose it from the menu, then choose **Add role**.

   If adding the role is successful, its status shows as `Pending`, then `Available`.

6. To connect a service directly:

   a. Choose **Select a service to connect to this cluster**.

   b. Choose the service from the menu, then choose **Connect service**.

   c. For **Connect cluster to *`Service Name`***, enter the Amazon Resource Name (ARN) to use to connect to the service, then choose **Connect service**.

   Amazon creates a new IAM role for connecting to the service. Its status shows as `Pending`, then `Available`.

7. (Optional) To stop associating an IAM role with a DB cluster and remove the related permission, choose the role and then choose **Delete**.

To set the cluster-level parameter for the associated IAM role

1. In the RDS console, choose **Parameter groups** in the navigation pane.
2. If you are already using a custom DB parameter group, you can select that group to use instead of creating a new DB cluster parameter group. If you are using the default DB cluster parameter group, create a new DB cluster parameter group, as described in the following steps:


   a. Choose **Create parameter group**.

b. For **Parameter group family**, choose `aurora-mysql8.0` for an Aurora MySQL 8.0-compatible DB cluster, or `aurora-mysql5.7` for an Aurora MySQL 5.7-compatible DB cluster.

c. For **Type**, choose **DB Cluster Parameter Group**.

d. For **Group name**, type the name of your new DB cluster parameter group.

e. For **Description**, type a description for your new DB cluster parameter group.

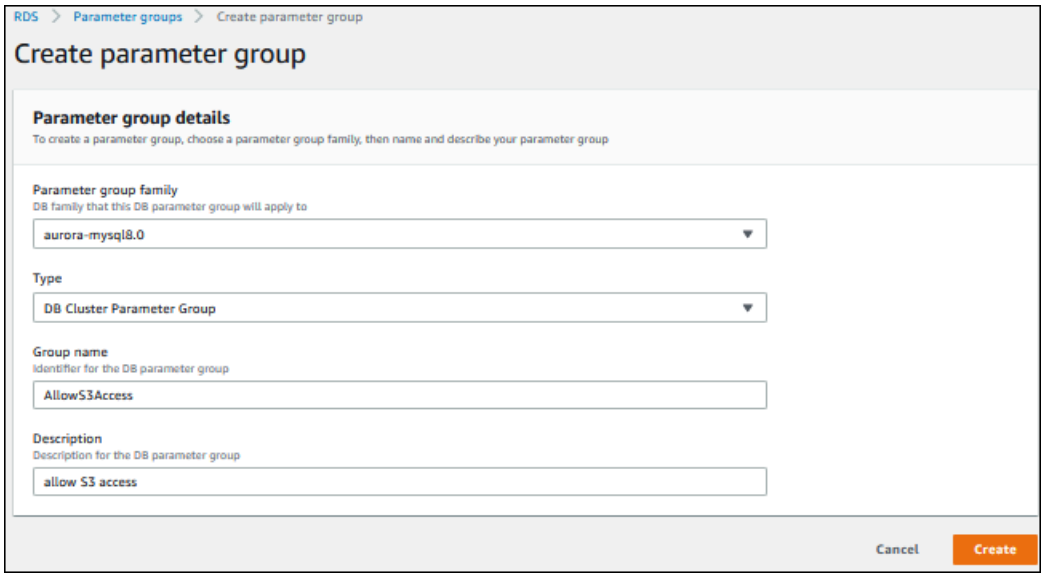

f. Choose **Create**.

3. On the **Parameter groups** page, select your DB cluster parameter group and choose **Edit** for **Parameter group actions**.

4. Set the appropriate cluster-level parameters to the related IAM role ARN values.

   For example, you can set just the `aws_default_s3_role` parameter to `arn:aws-cn:iam::123456789012:role/AllowS3Access`.

5. Choose **Save changes**.

6. To change the DB cluster parameter group for your DB cluster, complete the following steps:

   a. Choose **Databases**, and then choose your Aurora DB cluster.

   b. Choose **Modify**.

   c. Scroll to **Database options** and set **DB cluster parameter group** to the DB cluster parameter group.

   d. Choose **Continue**.

   e. Verify your changes and then choose **Apply immediately**.

f. Choose **Modify cluster**.

g. Choose **Databases**, and then choose the primary instance for your DB cluster.

h. For **Actions**, choose **Reboot**.

When the instance has rebooted, your IAM role is associated with your DB cluster.

For more information about cluster parameter groups, see Aurora MySQL configuration parameters.

CLI

To associate an IAM role with a DB cluster by using the Amazon CLI

1. Call the `add-role-to-db-cluster` command from the Amazon CLI to add the ARNs for your IAM roles to the DB cluster, as shown following.

```
PROMPT> aws rds add-role-to-db-cluster --db-cluster-identifier my-cluster --role-
arn arn:aws-cn:iam::123456789012:role/AllowAuroraS3Role
PROMPT> aws rds add-role-to-db-cluster --db-cluster-identifier my-cluster --role-
arn arn:aws-cn:iam::123456789012:role/AllowAuroraLambdaRole
```

2. If you are using the default DB cluster parameter group, create a new DB cluster parameter group. If you are already using a custom DB parameter group, you can use that group instead of creating a new DB cluster parameter group.

   To create a new DB cluster parameter group, call the `create-db-cluster-parameter-group` command from the Amazon CLI, as shown following.

```
PROMPT> aws rds create-db-cluster-parameter-group  --db-cluster-parameter-group-
name AllowAWSAccess \
     --db-parameter-group-family aurora5.7 --description "Allow access to Amazon S3
 and Amazon Lambda"
```

   For an Aurora MySQL 5.7-compatible DB cluster, specify `aurora-mysql5.7` for `--db-parameter-group-family`. For an Aurora MySQL 8.0-compatible DB cluster, specify `aurora-mysql8.0` for `--db-parameter-group-family`.

3. Set the appropriate cluster-level parameter or parameters and the related IAM role ARN values in your DB cluster parameter group, as shown following.

```
PROMPT> aws rds modify-db-cluster-parameter-group --db-cluster-parameter-group-name
 AllowAWSAccess \
    --parameters "ParameterName=aws_default_s3_role,ParameterValue=arn:aws-
cn:iam::123456789012:role/AllowAuroraS3Role,method=pending-reboot" \
    --parameters "ParameterName=aws_default_lambda_role,ParameterValue=arn:aws-
cn:iam::123456789012:role/AllowAuroraLambdaRole,method=pending-reboot"
```

4. Modify the DB cluster to use the new DB cluster parameter group and then reboot the cluster, as shown following.

```
PROMPT> aws rds modify-db-cluster --db-cluster-identifier my-cluster --db-cluster-
parameter-group-name AllowAWSAccess
PROMPT> aws rds reboot-db-instance --db-instance-identifier my-cluster-primary
```

When the instance has rebooted, your IAM roles are associated with your DB cluster.

For more information about cluster parameter groups, see Aurora MySQL configuration parameters.

Enabling network communication from Amazon Aurora to other Amazon services

To use certain other Amazon services with Amazon Aurora, the network configuration of your Aurora DB cluster must allow outbound connections to endpoints for those services. The following operations require this network configuration.

- Invoking Amazon Lambda functions. To learn about this feature, see Invoking a Lambda function with an Aurora MySQL native function.
- Accessing files from Amazon S3. To learn about this feature, see Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket and Saving data from an Amazon Aurora MySQL DB cluster into text files in an Amazon S3 bucket.
- Accessing Amazon KMS endpoints. Amazon KMS access is required to use database activity streams with Aurora MySQL. To learn about this feature, see Monitoring Amazon Aurora with Database Activity Streams.
- Accessing SageMaker AI endpoints. SageMaker AI access is required to use SageMaker AI machine learning with Aurora MySQL. To learn about this feature, see Using Amazon Aurora machine learning with Aurora MySQL.

Aurora returns the following error messages if it can't connect to a service endpoint.

```
ERROR 1871 (HY000): S3 API returned error: Network Connection
```

```
ERROR 1873 (HY000): Lambda API returned error: Network Connection. Unable to connect to
 endpoint
```

```
ERROR 1815 (HY000): Internal error: Unable to initialize S3Stream
```

For database activity streams using Aurora MySQL, the activity stream stops functioning if the DB cluster can't access the Amazon KMS endpoint. Aurora notifies you about this issue using RDS Events.

If you encounter these messages while using the corresponding Amazon services, check if your Aurora DB cluster is public or private. If your Aurora DB cluster is private, you must configure it to enable connections.

For an Aurora DB cluster to be public, it must be marked as publicly accessible. If you look at the details for the DB cluster in the Amazon Web Services Management Console, **Publicly Accessible** is **Yes** if this is the case. The DB cluster must also be in an Amazon VPC public subnet. For more information about publicly accessible DB instances, see Working with a DB cluster in a VPC. For more information about public Amazon VPC subnets, see Your VPC and subnets.

If your Aurora DB cluster isn't publicly accessible and in a VPC public subnet, it is private. You might have a DB cluster that is private and want to use one of the features that requires this network configuration. If so, configure the cluster so that it can connect to Internet addresses through Network Address Translation (NAT). As an alternative for Amazon S3, Amazon SageMaker AI, and Amazon Lambda, you can instead configure the VPC to have a VPC endpoint for the other service associated with the DB cluster's route table, see Working with a DB cluster in a VPC. For more information about configuring NAT in your VPC, see NAT gateways. For more information about configuring VPC endpoints, see VPC endpoints. You can also create an S3 gateway endpoint to access your S3 bucket. For more information, see Gateway endpoints for Amazon S3.

You might also have to open the ephemeral ports for your network access control lists (ACLs) in the outbound rules for your VPC security group. For more information on ephemeral ports for network ACLs, see Ephemeral ports in the *Amazon Virtual Private Cloud User Guide*.

DNS resolution conflicts with Kerberos authentication and Amazon service VPC endpoints

Connections from your DB cluster to Amazon services may fail if you enable Kerberos authentication and configure VPC endpoints for those services in your Amazon Managed Microsoft AD VPC.
When you enable Kerberos authentication, your DB cluster prioritizes Amazon Managed Microsoft AD DNS servers over the VPC DNS resolver. If endpoint records for Amazon services (such as Lambda, Amazon S3, SageMaker AI, or Amazon KMS) exist in your Amazon Managed Microsoft AD DNS, the endpoints may resolve to IP addresses in your Active Directory VPC rather than your database VPC. This configuration prevents successful connections from your DB cluster to those services.
For more information, see Using Kerberos authentication for Aurora MySQL.

Related topics

- Integrating Aurora with other Amazon services
- Managing an Amazon Aurora DB cluster

Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket

You can use the `LOAD DATA FROM S3` or `LOAD XML FROM S3` statement to load data from files stored in an Amazon S3 bucket. In Aurora MySQL, the files are first stored on the local disk, and then imported to the database. After the imports to the database are done, the local files are deleted.

Contents

- Giving Aurora access to Amazon S3
- Granting privileges to load data in Amazon Aurora MySQL
- Specifying the path (URI) to an Amazon S3 bucket
- LOAD DATA FROM S3
  - Syntax
  - Parameters

- Using a manifest to specify data files to load
  - Verifying loaded files using the aurora_s3_load_history table
- Examples
- LOAD XML FROM S3
  - Syntax
  - Parameters

Giving Aurora access to Amazon S3

Before you can load data from an Amazon S3 bucket, you must first give your Aurora MySQL DB cluster permission to access Amazon S3.

To give Aurora MySQL access to Amazon S3

1. Create an Amazon Identity and Access Management (IAM) policy that provides the bucket and object permissions that allow your Aurora MySQL DB cluster to access Amazon S3. For instructions, see Creating an IAM policy to access Amazon S3 resources.

   > **Note**
   >
   > In Aurora MySQL version 3.05 and higher, you can load objects that are encrypted using customer-managed Amazon KMS keys. To do so, include the `kms:Decrypt` permission in your IAM policy. For more information, see Creating an IAM policy to access Amazon KMS resources.
   > You don't need this permission to load objects that are encrypted using Amazon managed keys or Amazon S3 managed keys (SSE-S3).

2. Create an IAM role, and attach the IAM policy you created in Creating an IAM policy to access Amazon S3 resources to the new IAM role. For instructions, see Creating an IAM role to allow Amazon Aurora to access Amazon services.
3. Make sure the DB cluster is using a custom DB cluster parameter group.

   For more information about creating a custom DB cluster parameter group, see Creating a DB cluster parameter groupin Amazon Aurora.
4. For Aurora MySQL version 2, set either the `aurora_load_from_s3_role` or `aws_default_s3_role` DB cluster parameter to the Amazon Resource Name (ARN) of the

new IAM role. If an IAM role isn't specified for `aurora_load_from_s3_role`, Aurora uses the IAM role specified in `aws_default_s3_role`.

For Aurora MySQL version 3 and version 8.4, use `aws_default_s3_role`.

If the cluster is part of an Aurora global database, set this parameter for each Aurora cluster in the global database. Although only the primary cluster in an Aurora global database can load data, another cluster might be promoted by the failover mechanism and become the primary cluster.

For more information about DB cluster parameters, see Amazon Aurora DB cluster and DB instance parameters.

5. To permit database users in an Aurora MySQL DB cluster to access Amazon S3, associate the role that you created in Creating an IAM role to allow Amazon Aurora to access Amazon services with the DB cluster. For an Aurora global database, associate the role with each Aurora cluster in the global database. For information about associating an IAM role with a DB cluster, see Associating an IAM role with an Amazon Aurora MySQL DB cluster.
6. Configure your Aurora MySQL DB cluster to allow outbound connections to Amazon S3. For instructions, see Enabling network communication from Amazon Aurora to other Amazon services.

   If your DB cluster isn't publicly accessible and in a VPC public subnet, it is private. You can create an S3 gateway endpoint to access your S3 bucket. For more information, see Gateway endpoints for Amazon S3.

   For an Aurora global database, enable outbound connections for each Aurora cluster in the global database.

Granting privileges to load data in Amazon Aurora MySQL

The database user that issues the `LOAD DATA FROM S3` or `LOAD XML FROM S3` statement must have a specific role or privilege to issue either statement. In Aurora MySQL version 3 and version 8.4, you grant the `AWS_LOAD_S3_ACCESS` role. In Aurora MySQL version 2, you grant the `LOAD FROM S3` privilege. The administrative user for a DB cluster is granted the appropriate role or privilege by default. You can grant the privilege to another user by using one of the following statements.

Use the following statement for Aurora MySQL version 3 and version 8.4:

```
GRANT AWS_LOAD_S3_ACCESS TO 'user'@'domain-or-ip-address'
```

Tip

When you use the role technique in Aurora MySQL version 3, you can also activate the role by using the `SET ROLE role_name` or `SET ROLE ALL` statement. If you aren't familiar with the MySQL 8.0 role system, you can learn more in Role-based privilege model. For more details, see Using roles in the *MySQL Reference Manual*.

This only applies to the current active session. When you reconnect, you must run the `SET ROLE` statement again to grant privileges. For more information, see SET ROLE statement in the *MySQL Reference Manual*.

You can use the `activate_all_roles_on_login` DB cluster parameter to automatically activate all roles when a user connects to a DB instance. When this parameter is set, you generally don't have to call the `SET ROLE` statement explicitly to activate a role. For more information, see activate_all_roles_on_login in the *MySQL Reference Manual*.

However, you must call `SET ROLE ALL` explicitly at the beginning of a stored procedure to activate the role, when the stored procedure is called by a different user.

Use the following statement for Aurora MySQL version 2:

```
GRANT LOAD FROM S3 ON *.* TO 'user'@'domain-or-ip-address'
```

The `AWS_LOAD_S3_ACCESS` role and `LOAD FROM S3` privilege are specific to Amazon Aurora and are not available for external MySQL databases or RDS for MySQL DB instances. If you have set up replication between an Aurora DB cluster as the replication source and a MySQL database as the replication client, then the `GRANT` statement for the role or privilege causes replication to stop with an error. You can safely skip the error to resume replication. To skip the error on an RDS for MySQL instance, use the mysql_rds_skip_repl_error procedure. To skip the error on an external MySQL database, use the slave_skip_errors system variable (Aurora MySQL version 2) or replica_skip_errors system variable (Aurora MySQL version 3).

Note

The database user must have `INSERT` privileges for the database into which it's loading data.

Specifying the path (URI) to an Amazon S3 bucket

The syntax for specifying the path (URI) to files stored on an Amazon S3 bucket is as follows.

```
s3-region://amzn-s3-demo-bucket/file-name-or-prefix
```

The path includes the following values:

- `region` (optional) – The Amazon Region that contains the Amazon S3 bucket to load from. This value is optional. If you don't specify a `region` value, then Aurora loads your file from Amazon S3 in the same region as your DB cluster.
- `bucket-name` – The name of the Amazon S3 bucket that contains the data to load. Object prefixes that identify a virtual folder path are supported.
- `file-name-or-prefix` – The name of the Amazon S3 text file or XML file, or a prefix that identifies one or more text or XML files to load. You can also specify a manifest file that identifies one or more text files to load. For more information about using a manifest file to load text files from Amazon S3, see Using a manifest to specify data files to load.

To copy the URI for files in an S3 bucket

1. Sign in to the Amazon Web Services Management Console and open the Amazon S3 console at https://console.amazonaws.cn/s3/.
2. In the navigation pane, choose **Buckets**, and then choose the bucket whose URI you want to copy.
3. Select the prefix or file that you want to load from S3.
4. Choose **Copy S3 URI**.

LOAD DATA FROM S3

You can use the `LOAD DATA FROM S3` statement to load data from any text file format that is supported by the MySQL LOAD DATA INFILE statement, such as text data that is comma-delimited. Compressed files are not supported.

> **Note**
>
> Make sure that your Aurora MySQL DB cluster allows outbound connections to S3. For more information, see Enabling network communication from Amazon Aurora to other Amazon services.

Syntax

```
LOAD DATA [FROM] S3 [FILE | PREFIX | MANIFEST] 'S3-URI'
    [REPLACE | IGNORE]
    INTO TABLE tbl_name
    [PARTITION (partition_name,...)]
    [CHARACTER SET charset_name]
    [{FIELDS | COLUMNS}
        [TERMINATED BY 'string']
        [[OPTIONALLY] ENCLOSED BY 'char']
        [ESCAPED BY 'char']
    ]
    [LINES
        [STARTING BY 'string']
        [TERMINATED BY 'string']
    ]
    [IGNORE number {LINES | ROWS}]
    [(col_name_or_user_var,...)]
    [SET col_name = expr,...]
```

> **Note**
>
> In Aurora MySQL version 3.05 and higher, the keyword `FROM` is optional.

Parameters

The `LOAD DATA FROM S3` statement uses the following required and optional parameters. You can find more details about some of these parameters in LOAD DATA Statement in the MySQL documentation.

FILE | PREFIX | MANIFEST

Identifies whether to load the data from a single file, from all files that match a given prefix, or from all files in a specified manifest. `FILE` is the default.

S3-URI

Specifies the URI for a text or manifest file to load, or an Amazon S3 prefix to use. Specify the URI using the syntax described in Specifying the path (URI) to an Amazon S3 bucket.

REPLACE | IGNORE

Determines what action to take if an input row has the same unique key values as an existing row in the database table.

- Specify `REPLACE` if you want the input row to replace the existing row in the table.
- Specify `IGNORE` if you want to discard the input row.

INTO TABLE

Identifies the name of the database table to load the input rows into.

PARTITION

Requires that all input rows be inserted into the partitions identified by the specified list of comma-separated partition names. If an input row cannot be inserted into one of the specified partitions, then the statement fails and an error is returned.

CHARACTER SET

Identifies the character set of the data in the input file.

FIELDS | COLUMNS

Identifies how the fields or columns in the input file are delimited. Fields are tab-delimited by default.

LINES

Identifies how the lines in the input file are delimited. Lines are delimited by a newline character (`'\n'`) by default.

IGNORE *number* LINES | ROWS

Specifies to ignore a certain number of lines or rows at the start of the input file. For example, you can use `IGNORE 1 LINES` to skip over an initial header line containing column names, or

`IGNORE 2 ROWS` to skip over the first two rows of data in the input file. If you also use `PREFIX`, `IGNORE` skips a certain number of lines or rows at the start of the first input file.

col_name_or_user_var, ...

Specifies a comma-separated list of one or more column names or user variables that identify which columns to load by name. The name of a user variable used for this purpose must match the name of an element from the text file, prefixed with @. You can employ user variables to store the corresponding field values for subsequent reuse.

For example, the following statement loads the first column from the input file into the first column of `table1`, and sets the value of the `table_column2` column in `table1` to the input value of the second column divided by 100.

```
LOAD DATA FROM S3 's3://amzn-s3-demo-bucket/data.txt'
    INTO TABLE table1
    (column1, @var1)
    SET table_column2 = @var1/100;
```

SET

Specifies a comma-separated list of assignment operations that set the values of columns in the table to values not included in the input file.

For example, the following statement sets the first two columns of `table1` to the values in the first two columns from the input file, and then sets the value of the `column3` in `table1` to the current time stamp.

```
LOAD DATA FROM S3  's3://amzn-s3-demo-bucket/data.txt'
    INTO TABLE table1
    (column1, column2)
    SET column3 = CURRENT_TIMESTAMP;
```

You can use subqueries in the right side of `SET` assignments. For a subquery that returns a value to be assigned to a column, you can use only a scalar subquery. Also, you cannot use a subquery to select from the table that is being loaded.

You can't use the `LOCAL` keyword of the `LOAD DATA FROM S3` statement if you're loading data from an Amazon S3 bucket.

Using a manifest to specify data files to load

You can use the `LOAD DATA FROM S3` statement with the `MANIFEST` keyword to specify a manifest file in JSON format that lists the text files to be loaded into a table in your DB cluster.

The following JSON schema describes the format and content of a manifest file.

```
{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "additionalProperties": false,
    "definitions": {},
    "id": "Aurora_LoadFromS3_Manifest",
    "properties": {
        "entries": {
            "additionalItems": false,
            "id": "/properties/entries",
            "items": {
                "additionalProperties": false,
                "id": "/properties/entries/items",
                "properties": {
                    "mandatory": {
                        "default": "false",
                        "id": "/properties/entries/items/properties/mandatory",
                        "type": "boolean"
                    },
                    "url": {
                        "id": "/properties/entries/items/properties/url",
                        "maxLength": 1024,
                        "minLength": 1,
                        "type": "string"
                    }
                },
                "required": [
                    "url"
                ],
                "type": "object"
            },
            "type": "array",
            "uniqueItems": true
        }
    },
    "required": [
        "entries"
    ],
```

```
    "type": "object"
}
```

Each `url` in the manifest must specify a URL with the bucket name and full object path for the file, not just a prefix. You can use a manifest to load files from different buckets, different regions, or files that do not share the same prefix. If a region is not specified in the URL, the region of the target Aurora DB cluster is used. The following example shows a manifest file that loads four files from different buckets.

```
{
  "entries": [
    {
      "url":"s3://aurora-bucket/2013-10-04-customerdata",
      "mandatory":true
    },
    {
      "url":"s3-us-west-2://aurora-bucket-usw2/2013-10-05-customerdata",
      "mandatory":true
    },
    {
      "url":"s3://aurora-bucket/2013-10-04-customerdata",
      "mandatory":false
    },
    {
      "url":"s3://aurora-bucket/2013-10-05-customerdata"
    }
  ]
}
```

The optional `mandatory` flag specifies whether `LOAD DATA FROM S3` should return an error if the file is not found. The `mandatory` flag defaults to `false`. Regardless of how `mandatory` is set, `LOAD DATA FROM S3` terminates if no files are found.

Manifest files can have any extension. The following example runs the `LOAD DATA FROM S3` statement with the manifest in the previous example, which is named **`customer.manifest`**.

```
LOAD DATA FROM S3 MANIFEST 's3-us-west-2://aurora-bucket/customer.manifest'
    INTO TABLE CUSTOMER
    FIELDS TERMINATED BY ','
    LINES TERMINATED BY '\n'
    (ID, FIRSTNAME, LASTNAME, EMAIL);
```

After the statement completes, an entry for each successfully loaded file is written to the `aurora_s3_load_history` table.

Verifying loaded files using the aurora_s3_load_history table

Every successful `LOAD DATA FROM S3` statement updates the `aurora_s3_load_history` table in the `mysql` schema with an entry for each file that was loaded.

After you run the `LOAD DATA FROM S3` statement, you can verify which files were loaded by querying the `aurora_s3_load_history` table. To see the files that were loaded from one iteration of the statement, use the `WHERE` clause to filter the records on the Amazon S3 URI for the manifest file used in the statement. If you have used the same manifest file before, filter the results using the `timestamp` field.

```
select * from mysql.aurora_s3_load_history where load_prefix = 'S3_URI';
```

The following table describes the fields in the `aurora_s3_load_history` table.

Field	Description
`load_prefix`	The URI that was specified in the load statement. This URI can map to any of the following: • A single data file for a `LOAD DATA FROM S3 FILE` statement • An Amazon S3 prefix that maps to multiple data files for a `LOAD DATA FROM S3 PREFIX` statement • A single manifest file that contains the names of files to be loaded for a `LOAD DATA FROM S3 MANIFEST` statement
`file_name`	The name of a file that was loaded into Aurora from Amazon S3 using the URI identified in the `load_prefix` field.
`version_number`	The version number of the file identified by the `file_name` field that was loaded, if the Amazon S3 bucket has a version number.
`bytes_loaded`	The size of the file loaded, in bytes.

Field	Description
load_timestamp	The timestamp when the LOAD DATA FROM S3 statement completed.

Examples

The following statement loads data from an Amazon S3 bucket that is in the same region as the Aurora DB cluster. The statement reads the comma-delimited data in the file customerdata.txt that is in the *amzn-s3-demo-bucket* Amazon S3 bucket, and then loads the data into the table store-schema.customer-table.

```
LOAD DATA FROM S3 's3://amzn-s3-demo-bucket/customerdata.csv'
    INTO TABLE store-schema.customer-table
    FIELDS TERMINATED BY ','
    LINES TERMINATED BY '\n'
    (ID, FIRSTNAME, LASTNAME, ADDRESS, EMAIL, PHONE);
```

The following statement loads data from an Amazon S3 bucket that is in a different region from the Aurora DB cluster. The statement reads the comma-delimited data from all files that match the employee-data object prefix in the *amzn-s3-demo-bucket* Amazon S3 bucket in the us-west-2 region, and then loads the data into the employees table.

```
LOAD DATA FROM S3 PREFIX 's3-us-west-2://amzn-s3-demo-bucket/employee_data'
    INTO TABLE employees
    FIELDS TERMINATED BY ','
    LINES TERMINATED BY '\n'
    (ID, FIRSTNAME, LASTNAME, EMAIL, SALARY);
```

The following statement loads data from the files specified in a JSON manifest file named q1_sales.json into the sales table.

```
LOAD DATA FROM S3 MANIFEST 's3-us-west-2://amzn-s3-demo-bucket1/q1_sales.json'
    INTO TABLE sales
    FIELDS TERMINATED BY ','
    LINES TERMINATED BY '\n'
    (MONTH, STORE, GROSS, NET);
```

LOAD XML FROM S3

You can use the `LOAD XML FROM S3` statement to load data from XML files stored on an Amazon S3 bucket in one of three different XML formats:

- Column names as attributes of a `<row>` element. The attribute value identifies the contents of the table field.

```
<row column1="value1" column2="value2" .../>
```

- Column names as child elements of a `<row>` element. The value of the child element identifies the contents of the table field.

```
<row>
  <column1>value1</column1>
  <column2>value2</column2>
</row>
```

- Column names in the `name` attribute of `<field>` elements in a `<row>` element. The value of the `<field>` element identifies the contents of the table field.

```
<row>
  <field name='column1'>value1</field>
  <field name='column2'>value2</field>
</row>
```

Syntax

```
LOAD XML FROM S3 'S3-URI'
    [REPLACE | IGNORE]
    INTO TABLE tbl_name
    [PARTITION (partition_name,...)]
    [CHARACTER SET charset_name]
    [ROWS IDENTIFIED BY '<element-name>']
    [IGNORE number {LINES | ROWS}]
    [(field_name_or_user_var,...)]
    [SET col_name = expr,...]
```

Parameters

The `LOAD XML FROM S3` statement uses the following required and optional parameters. You can find more details about some of these parameters in LOAD XML Statement in the MySQL documentation.

FILE | PREFIX

Identifies whether to load the data from a single file, or from all files that match a given prefix. `FILE` is the default.

REPLACE | IGNORE

Determines what action to take if an input row has the same unique key values as an existing row in the database table.

- Specify `REPLACE` if you want the input row to replace the existing row in the table.
- Specify `IGNORE` if you want to discard the input row. `IGNORE` is the default.

INTO TABLE

Identifies the name of the database table to load the input rows into.

PARTITION

Requires that all input rows be inserted into the partitions identified by the specified list of comma-separated partition names. If an input row cannot be inserted into one of the specified partitions, then the statement fails and an error is returned.

CHARACTER SET

Identifies the character set of the data in the input file.

ROWS IDENTIFIED BY

Identifies the element name that identifies a row in the input file. The default is `<row>`.

IGNORE *number* LINES | ROWS

Specifies to ignore a certain number of lines or rows at the start of the input file. For example, you can use `IGNORE 1 LINES` to skip over the first line in the text file, or `IGNORE 2 ROWS` to skip over the first two rows of data in the input XML.

field_name_or_user_var, ...

Specifies a comma-separated list of one or more XML element names or user variables that identify which elements to load by name. The name of a user variable used for this purpose

must match the name of an element from the XML file, prefixed with @. You can employ user variables to store the corresponding field values for subsequent reuse.

For example, the following statement loads the first column from the input file into the first column of `table1`, and sets the value of the `table_column2` column in `table1` to the input value of the second column divided by 100.

```
LOAD XML FROM S3 's3://amzn-s3-demo-bucket/data.xml'
   INTO TABLE table1
   (column1, @var1)
   SET table_column2 = @var1/100;
```

SET

Specifies a comma-separated list of assignment operations that set the values of columns in the table to values not included in the input file.

For example, the following statement sets the first two columns of `table1` to the values in the first two columns from the input file, and then sets the value of the `column3` in `table1` to the current time stamp.

```
LOAD XML FROM S3 's3://amzn-s3-demo-bucket/data.xml'
   INTO TABLE table1
   (column1, column2)
   SET column3 = CURRENT_TIMESTAMP;
```

You can use subqueries in the right side of SET assignments. For a subquery that returns a value to be assigned to a column, you can use only a scalar subquery. Also, you can't use a subquery to select from the table that's being loaded.

Saving data from an Amazon Aurora MySQL DB cluster into text files in an Amazon S3 bucket

You can use the `SELECT INTO OUTFILE S3` statement to query data from an Amazon Aurora MySQL DB cluster and save it into text files stored in an Amazon S3 bucket. In Aurora MySQL, the files are first stored on the local disk, and then exported to S3. After the exports are done, the local files are deleted.

You can encrypt the Amazon S3 bucket using an Amazon S3 managed key (SSE-S3) or Amazon KMS key (SSE-KMS: Amazon managed key or customer managed key).

The `LOAD DATA FROM S3` statement can use files created by the `SELECT INTO OUTFILE S3` statement to load data into an Aurora DB cluster. For more information, see Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket.

> **Note**
>
> You can also save DB cluster data and DB cluster snapshot data to Amazon S3 using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API. For more information, see Exporting DB cluster data to Amazon S3 and Exporting DB cluster snapshot data to Amazon S3.

Contents

- Giving Aurora MySQL access to Amazon S3
- Granting privileges to save data in Aurora MySQL
- Specifying a path to an Amazon S3 bucket
- Creating a manifest to list data files
- SELECT INTO OUTFILE S3
  - Syntax
  - Parameters
  - Considerations
  - Examples

Giving Aurora MySQL access to Amazon S3

Before you can save data into an Amazon S3 bucket, you must first give your Aurora MySQL DB cluster permission to access Amazon S3.

To give Aurora MySQL access to Amazon S3

1. Create an Amazon Identity and Access Management (IAM) policy that provides the bucket and object permissions that allow your Aurora MySQL DB cluster to access Amazon S3. For instructions, see Creating an IAM policy to access Amazon S3 resources.

> **Note**
>
> In Aurora MySQL version 3.05 and higher, you can encrypt objects using Amazon KMS customer managed keys. To do so, include the `kms:GenerateDataKey` permission in your IAM policy. For more information, see Creating an IAM policy to access Amazon KMS resources.
> You don't need this permission to encrypt objects using Amazon managed keys or Amazon S3 managed keys (SSE-S3).

2. Create an IAM role, and attach the IAM policy you created in Creating an IAM policy to access Amazon S3 resources to the new IAM role. For instructions, see Creating an IAM role to allow Amazon Aurora to access Amazon services.
3. For Aurora MySQL version 2, set either the `aurora_select_into_s3_role` or `aws_default_s3_role` DB cluster parameter to the Amazon Resource Name (ARN) of the new IAM role. If an IAM role isn't specified for `aurora_select_into_s3_role`, Aurora uses the IAM role specified in `aws_default_s3_role`.

   For Aurora MySQL version 3 and version 8.4, use `aws_default_s3_role`.

   If the cluster is part of an Aurora global database, set this parameter for each Aurora cluster in the global database.

   For more information about DB cluster parameters, see Amazon Aurora DB cluster and DB instance parameters.
4. To permit database users in an Aurora MySQL DB cluster to access Amazon S3, associate the role that you created in Creating an IAM role to allow Amazon Aurora to access Amazon services with the DB cluster.

   For an Aurora global database, associate the role with each Aurora cluster in the global database.

   For information about associating an IAM role with a DB cluster, see Associating an IAM role with an Amazon Aurora MySQL DB cluster.
5. Configure your Aurora MySQL DB cluster to allow outbound connections to Amazon S3. For instructions, see Enabling network communication from Amazon Aurora to other Amazon services.

For an Aurora global database, enable outbound connections for each Aurora cluster in the global database.

Granting privileges to save data in Aurora MySQL

The database user that issues the `SELECT INTO OUTFILE S3` statement must have a specific role or privilege. In Aurora MySQL version 3 and version 8.4, you grant the `AWS_SELECT_S3_ACCESS` role. In Aurora MySQL version 2, you grant the `SELECT INTO S3` privilege. The administrative user for a DB cluster is granted the appropriate role or privilege by default. You can grant the privilege to another user by using one of the following statements.

Use the following statement for Aurora MySQL version 3 and version 8.4:

```
GRANT AWS_SELECT_S3_ACCESS TO 'user'@'domain-or-ip-address'
```

Tip

When you use the role technique in Aurora MySQL version 3, you can also activate the role by using the `SET ROLE role_name` or `SET ROLE ALL` statement. If you aren't familiar with the MySQL 8.0 role system, you can learn more in Role-based privilege model. For more details, see Using roles in the *MySQL Reference Manual*.

This only applies to the current active session. When you reconnect, you must run the `SET ROLE` statement again to grant privileges. For more information, see SET ROLE statement in the *MySQL Reference Manual*.

You can use the `activate_all_roles_on_login` DB cluster parameter to automatically activate all roles when a user connects to a DB instance. When this parameter is set, you generally don't have to call the `SET ROLE` statement explicitly to activate a role. For more information, see activate_all_roles_on_login in the *MySQL Reference Manual*.

However, you must call `SET ROLE ALL` explicitly at the beginning of a stored procedure to activate the role, when the stored procedure is called by a different user.

Use the following statement for Aurora MySQL version 2:

```
GRANT SELECT INTO S3 ON *.* TO 'user'@'domain-or-ip-address'
```

The AWS_SELECT_S3_ACCESS role and SELECT INTO S3 privilege are specific to Amazon Aurora MySQL and are not available for MySQL databases or RDS for MySQL DB instances. If you have set up replication between an Aurora MySQL DB cluster as the replication source and a MySQL database as the replication client, then the GRANT statement for the role or privilege causes replication to stop with an error. You can safely skip the error to resume replication. To skip the error on an RDS for MySQL DB instance, use the mysql_rds_skip_repl_error procedure. To skip the error on an external MySQL database, use the slave_skip_errors system variable (Aurora MySQL version 2) or replica_skip_errors system variable (Aurora MySQL version 3).

Specifying a path to an Amazon S3 bucket

The syntax for specifying a path to store the data and manifest files on an Amazon S3 bucket is similar to that used in the LOAD DATA FROM S3 PREFIX statement, as shown following.

```
s3-region://bucket-name/file-prefix
```

The path includes the following values:

- region (optional) – The Amazon Region that contains the Amazon S3 bucket to save the data into. This value is optional. If you don't specify a region value, then Aurora saves your files into Amazon S3 in the same region as your DB cluster.
- bucket-name – The name of the Amazon S3 bucket to save the data into. Object prefixes that identify a virtual folder path are supported.
- file-prefix – The Amazon S3 object prefix that identifies the files to be saved in Amazon S3.

The data files created by the SELECT INTO OUTFILE S3 statement use the following path, in which *00000* represents a 5-digit, zero-based integer number.

```
s3-region://bucket-name/file-prefix.part_00000
```

For example, suppose that a SELECT INTO OUTFILE S3 statement specifies s3-us-west-2://bucket/prefix as the path in which to store data files and creates three data files. The specified Amazon S3 bucket contains the following data files.

- s3-us-west-2://bucket/prefix.part_00000
- s3-us-west-2://bucket/prefix.part_00001
- s3-us-west-2://bucket/prefix.part_00002

Creating a manifest to list data files

You can use the `SELECT INTO OUTFILE S3` statement with the `MANIFEST ON` option to create a manifest file in JSON format that lists the text files created by the statement. The `LOAD DATA FROM S3` statement can use the manifest file to load the data files back into an Aurora MySQL DB cluster. For more information about using a manifest to load data files from Amazon S3 into an Aurora MySQL DB cluster, see Using a manifest to specify data files to load.

The data files included in the manifest created by the `SELECT INTO OUTFILE S3` statement are listed in the order that they're created by the statement. For example, suppose that a `SELECT INTO OUTFILE S3` statement specified `s3-us-west-2://bucket/prefix` as the path in which to store data files and creates three data files and a manifest file. The specified Amazon S3 bucket contains a manifest file named `s3-us-west-2://bucket/prefix.manifest`, that contains the following information.

```
{
  "entries": [
    {
      "url":"s3-us-west-2://bucket/prefix.part_00000"
    },
    {
      "url":"s3-us-west-2://bucket/prefix.part_00001"
    },
    {
      "url":"s3-us-west-2://bucket/prefix.part_00002"
    }
  ]
}
```

SELECT INTO OUTFILE S3

You can use the `SELECT INTO OUTFILE S3` statement to query data from a DB cluster and save it directly into delimited text files stored in an Amazon S3 bucket.

Compressed files aren't supported. Encrypted files are supported starting in Aurora MySQL version 2.09.0.

Syntax

```
SELECT
```

```
    [ALL | DISTINCT | DISTINCTROW ]
        [HIGH_PRIORITY]
        [STRAIGHT_JOIN]
        [SQL_SMALL_RESULT] [SQL_BIG_RESULT] [SQL_BUFFER_RESULT]
        [SQL_CACHE | SQL_NO_CACHE] [SQL_CALC_FOUND_ROWS]
    select_expr [, select_expr ...]
    [FROM table_references
        [PARTITION partition_list]
    [WHERE where_condition]
    [GROUP BY {col_name | expr | position}
        [ASC | DESC], ... [WITH ROLLUP]]
    [HAVING where_condition]
    [ORDER BY {col_name | expr | position}
         [ASC | DESC], ...]
    [LIMIT {[offset,] row_count | row_count OFFSET offset}]
INTO OUTFILE S3 's3_uri'
[CHARACTER SET charset_name]
    [export_options]
    [MANIFEST {ON | OFF}]
    [OVERWRITE {ON | OFF}]
    [ENCRYPTION {ON | OFF | SSE_S3 | SSE_KMS ['cmk_id']}]

export_options:
    [FORMAT {CSV|TEXT} [HEADER]]
    [{FIELDS | COLUMNS}
        [TERMINATED BY 'string']
        [[OPTIONALLY] ENCLOSED BY 'char']
        [ESCAPED BY 'char']
    ]
    [LINES
        [STARTING BY 'string']
        [TERMINATED BY 'string']
]
```

Parameters

The `SELECT INTO OUTFILE S3` statement uses the following required and optional parameters that are specific to Aurora.

s3-uri

Specifies the URI for an Amazon S3 prefix to use. Use the syntax described in Specifying a path to an Amazon S3 bucket.

FORMAT {CSV|TEXT} [HEADER]

Optionally saves the data in CSV format.

The `TEXT` option is the default and produces the existing MySQL export format.

The `CSV` option produces comma-separated data values. The CSV format follows the specification in RFC-4180. If you specify the optional keyword `HEADER`, the output file contains one header line. The labels in the header line correspond to the column names from the `SELECT` statement. You can use the CSV files for training data models for use with Amazon ML services. For more information about using exported Aurora data with Amazon ML services, see Exporting data to Amazon S3 for SageMaker AI model training (Advanced).

MANIFEST {ON | OFF}

Indicates whether a manifest file is created in Amazon S3. The manifest file is a JavaScript Object Notation (JSON) file that can be used to load data into an Aurora DB cluster with the `LOAD DATA FROM S3 MANIFEST` statement. For more information about `LOAD DATA FROM S3 MANIFEST`, see Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket.

If `MANIFEST ON` is specified in the query, the manifest file is created in Amazon S3 after all data files have been created and uploaded. The manifest file is created using the following path:

```
s3-region://bucket-name/file-prefix.manifest
```

For more information about the format of the manifest file's contents, see Creating a manifest to list data files.

OVERWRITE {ON | OFF}

Indicates whether existing files in the specified Amazon S3 bucket are overwritten. If `OVERWRITE ON` is specified, existing files that match the file prefix in the URI specified in `s3-uri`are overwritten. Otherwise, an error occurs.

ENCRYPTION {ON | OFF | SSE_S3 | SSE_KMS ['*cmk_id*']}

Indicates whether to use server-side encryption with Amazon S3 managed keys (SSE-S3) or Amazon KMS keys (SSE-KMS, including Amazon managed keys and customer managed keys). The `SSE_S3` and `SSE_KMS` settings are available in Aurora MySQL version 3.05 and higher.

You can also use the aurora_select_into_s3_encryption_default session variable instead of the ENCRYPTION clause, as shown in the following example. Use either the SQL clause or the session variable, but not both.

```
set session set session aurora_select_into_s3_encryption_default={ON | OFF | SSE_S3
 | SSE_KMS};
```

The SSE_S3 and SSE_KMS settings are available in Aurora MySQL version 3.05 and higher.

When you set aurora_select_into_s3_encryption_default to the following value:

- OFF – The default encryption policy of the S3 bucket is followed. The default value of aurora_select_into_s3_encryption_default is OFF.
- ON or SSE_S3 – The S3 object is encrypted using Amazon S3 managed keys (SSE-S3).
- SSE_KMS – The S3 object is encrypted using an Amazon KMS key.

  In this case, you also include the session variable aurora_s3_default_cmk_id, for example:

  ```
  set session aurora_select_into_s3_encryption_default={SSE_KMS};
  set session aurora_s3_default_cmk_id={NULL | 'cmk_id'};
  ```

  - When aurora_s3_default_cmk_id is NULL, the S3 object is encrypted using an Amazon managed key.
  - When aurora_s3_default_cmk_id is a nonempty string cmk_id, the S3 object is encrypted using a customer managed key.

    The value of cmk_id can't be an empty string.

When you use the SELECT INTO OUTFILE S3 command, Aurora determines the encryption as follows:

- If the ENCRYPTION clause is present in the SQL command, Aurora relies only on the value of ENCRYPTION, and doesn't use a session variable.
- If the ENCRYPTION clause isn't present, Aurora relies on the value of the session variable.

For more information, see Using server-side encryption with Amazon S3 managed keys (SSE-S3) and Using server-side encryption withAmazon KMS keys (SSE-KMS) in the *Amazon Simple Storage Service User Guide*.

You can find more details about other parameters in SELECT statement and LOAD DATA statement, in the MySQL documentation.

Considerations

The number of files written to the Amazon S3 bucket depends on the amount of data selected by the `SELECT INTO OUTFILE S3` statement and the file size threshold for Aurora MySQL. The default file size threshold is 6 gigabytes (GB). If the data selected by the statement is less than the file size threshold, a single file is created; otherwise, multiple files are created. Other considerations for files created by this statement include the following:

- Aurora MySQL guarantees that rows in data files are not split across file boundaries. For multiple files, the size of every data file except the last is typically close to the file size threshold. However, occasionally staying under the file size threshold results in a row being split across two data files. In this case, Aurora MySQL creates a data file that keeps the row intact, but might be larger than the file size threshold.
- Because each `SELECT` statement in Aurora MySQL runs as an atomic transaction, a `SELECT INTO OUTFILE S3` statement that selects a large data set might run for some time. If the statement fails for any reason, you might need to start over and issue the statement again. If the statement fails, however, files already uploaded to Amazon S3 remain in the specified Amazon S3 bucket. You can use another statement to upload the remaining data instead of starting over again.
- If the amount of data to be selected is large (more than 25 GB), we recommend that you use multiple `SELECT INTO OUTFILE S3` statements to save the data to Amazon S3. Each statement should select a different portion of the data to be saved, and also specify a different `file_prefix` in the `s3-uri` parameter to use when saving the data files. Partitioning the data to be selected with multiple statements makes it easier to recover from an error in one statement. If an error occurs for one statement, only a portion of data needs to be re-selected and uploaded to Amazon S3. Using multiple statements also helps to avoid a single long-running transaction, which can improve performance.
- If multiple `SELECT INTO OUTFILE S3` statements that use the same `file_prefix` in the `s3-uri` parameter run in parallel to select data into Amazon S3, the behavior is undefined.
- Metadata, such as table schema or file metadata, is not uploaded by Aurora MySQL to Amazon S3.
- In some cases, you might re-run a `SELECT INTO OUTFILE S3` query, such as to recover from a failure. In these cases, you must either remove any existing data files in the Amazon S3 bucket

with the same file prefix specified in `s3-uri`, or include `OVERWRITE ON` in the `SELECT INTO OUTFILE S3` query.

The `SELECT INTO OUTFILE S3` statement returns a typical MySQL error number and response on success or failure. If you don't have access to the MySQL error number and response, the easiest way to determine when it's done is by specifying `MANIFEST ON` in the statement. The manifest file is the last file written by the statement. In other words, if you have a manifest file, the statement has completed.

Currently, there's no way to directly monitor the progress of the `SELECT INTO OUTFILE S3` statement while it runs. However, suppose that you're writing a large amount of data from Aurora MySQL to Amazon S3 using this statement, and you know the size of the data selected by the statement. In this case, you can estimate progress by monitoring the creation of data files in Amazon S3.

To do so, you can use the fact that a data file is created in the specified Amazon S3 bucket for about every 6 GB of data selected by the statement. Divide the size of the data selected by 6 GB to get the estimated number of data files to create. You can then estimate the progress of the statement by monitoring the number of files uploaded to Amazon S3 while the statement runs.

Examples

The following statement selects all of the data in the `employees` table and saves the data into an Amazon S3 bucket that is in a different region from the Aurora MySQL DB cluster. The statement creates data files in which each field is terminated by a comma (`,`) character and each row is terminated by a newline (`\n`) character. The statement returns an error if files that match the `sample_employee_data` file prefix exist in the specified Amazon S3 bucket.

```
SELECT * FROM employees INTO OUTFILE S3 's3-us-west-2://aurora-select-into-s3-pdx/
sample_employee_data'
    FIELDS TERMINATED BY ','
    LINES TERMINATED BY '\n';
```

The following statement selects all of the data in the `employees` table and saves the data into an Amazon S3 bucket that is in the same region as the Aurora MySQL DB cluster. The statement creates data files in which each field is terminated by a comma (`,`) character and each row is terminated by a newline (`\n`) character, and also a manifest file. The statement returns an error if files that match the `sample_employee_data` file prefix exist in the specified Amazon S3 bucket.

```
SELECT * FROM employees INTO OUTFILE S3 's3://aurora-select-into-s3-pdx/
sample_employee_data'
    FIELDS TERMINATED BY ','
    LINES TERMINATED BY '\n'
    MANIFEST ON;
```

The following statement selects all of the data in the `employees` table and saves the data into an Amazon S3 bucket that is in a different region from the Aurora DB cluster. The statement creates data files in which each field is terminated by a comma (`,`) character and each row is terminated by a newline (\n) character. The statement overwrites any existing files that match the `sample_employee_data` file prefix in the specified Amazon S3 bucket.

```
SELECT * FROM employees INTO OUTFILE S3 's3-us-west-2://aurora-select-into-s3-pdx/
sample_employee_data'
    FIELDS TERMINATED BY ','
    LINES TERMINATED BY '\n'
    OVERWRITE ON;
```

The following statement selects all of the data in the `employees` table and saves the data into an Amazon S3 bucket that is in the same region as the Aurora MySQL DB cluster. The statement creates data files in which each field is terminated by a comma (`,`) character and each row is terminated by a newline (\n) character, and also a manifest file. The statement overwrites any existing files that match the `sample_employee_data` file prefix in the specified Amazon S3 bucket.

```
SELECT * FROM employees INTO OUTFILE S3 's3://aurora-select-into-s3-pdx/
sample_employee_data'
    FIELDS TERMINATED BY ','
    LINES TERMINATED BY '\n'
    MANIFEST ON
    OVERWRITE ON;
```

Invoking a Lambda function from an Amazon Aurora MySQL DB cluster

You can invoke an Amazon Lambda function from an Amazon Aurora MySQL-Compatible Edition DB cluster with the native function `lambda_sync` or `lambda_async`. Before invoking a Lambda function from an Aurora MySQL, the Aurora DB cluster must have access to Lambda. For details about granting access to Aurora MySQL, see Giving Aurora access to Lambda. For information

about the `lambda_sync` and `lambda_async` stored functions, see Invoking a Lambda function with an Aurora MySQL native function.

You can also call an Amazon Lambda function by using a stored procedure. However, using a stored procedure is deprecated. We strongly recommend using an Aurora MySQL native function if you are using one of the following Aurora MySQL versions:

- Aurora MySQL version 2, for MySQL 5.7-compatible clusters.
- Aurora MySQL version 3.01 and higher, for MySQL 8.0-compatible clusters. The stored procedure isn't available in Aurora MySQL version 3.

For information about giving Aurora access to Lambda and invoking a Lambda function, see the following topics.

Topics

- Giving Aurora access to Lambda
- Invoking a Lambda function with an Aurora MySQL native function
- Invoking a Lambda function with an Aurora MySQL stored procedure (deprecated)

Giving Aurora access to Lambda

Before you can invoke Lambda functions from an Aurora MySQL DB cluster, make sure to first give your cluster permission to access Lambda.

To give Aurora MySQL access to Lambda

1. Create an Amazon Identity and Access Management (IAM) policy that provides the permissions that allow your Aurora MySQL DB cluster to invoke Lambda functions. For instructions, see Creating an IAM policy to access Amazon Lambda resources.
2. Create an IAM role, and attach the IAM policy you created in Creating an IAM policy to access Amazon Lambda resources to the new IAM role. For instructions, see Creating an IAM role to allow Amazon Aurora to access Amazon services.
3. Set the `aws_default_lambda_role` DB cluster parameter to the Amazon Resource Name (ARN) of the new IAM role.

   If the cluster is part of an Aurora global database, apply the same setting for each Aurora cluster in the global database.

For more information about DB cluster parameters, see Amazon Aurora DB cluster and DB instance parameters.

4. To permit database users in an Aurora MySQL DB cluster to invoke Lambda functions, associate the role that you created in Creating an IAM role to allow Amazon Aurora to access Amazon services with the DB cluster. For information about associating an IAM role with a DB cluster, see Associating an IAM role with an Amazon Aurora MySQL DB cluster.

   If the cluster is part of an Aurora global database, associate the role with each Aurora cluster in the global database.

5. Configure your Aurora MySQL DB cluster to allow outbound connections to Lambda. For instructions, see Enabling network communication from Amazon Aurora to other Amazon services.

   If the cluster is part of an Aurora global database, enable outbound connections for each Aurora cluster in the global database.

DNS resolution conflicts with Kerberos authentication and Lambda VPC endpoints

Lambda invocations from your DB cluster may fail if you enable Kerberos authentication and configure Lambda VPC endpoints in your Amazon Managed Microsoft AD VPC. When you enable Kerberos authentication, your DB cluster prioritizes Amazon Managed Microsoft AD DNS servers over the VPC DNS resolver. If Lambda endpoint records exist in your Amazon Managed Microsoft AD DNS, the endpoints may resolve to IP addresses in your Active Directory VPC rather than your database VPC. This configuration prevents successful Lambda invocations.
For more information, see Using Kerberos authentication for Aurora MySQL.

Invoking a Lambda function with an Aurora MySQL native function

Note

You can call the native functions `lambda_sync` and `lambda_async` when you use Aurora MySQL version 2, or Aurora MySQL version 3.01 and higher. For more information about Aurora MySQL versions, see Database engine updates for Amazon Aurora MySQL.

You can invoke an Amazon Lambda function from an Aurora MySQL DB cluster by calling the native functions `lambda_sync` and `lambda_async`. This approach can be useful when you want to integrate your database running on Aurora MySQL with other Amazon services. For example, you might want to send a notification using Amazon Simple Notification Service (Amazon SNS) whenever a row is inserted into a specific table in your database.

Contents

- Working with native functions to invoke a Lambda function
  - Granting the role in Aurora MySQL version 3 and version 8.4
  - Granting the privilege in Aurora MySQL version 2
  - Syntax for the lambda_sync function
  - Parameters for the lambda_sync function
  - Example for the lambda_sync function
  - Syntax for the lambda_async function
  - Parameters for the lambda_async function
  - Example for the lambda_async function
  - Invoking a Lambda function within a trigger

Working with native functions to invoke a Lambda function

The `lambda_sync` and `lambda_async` functions are built-in, native functions that invoke a Lambda function synchronously or asynchronously. When you must know the result of the Lambda function before moving on to another action, use the synchronous function `lambda_sync`. When you don't need to know the result of the Lambda function before moving on to another action, use the asynchronous function `lambda_async`.

Granting the role in Aurora MySQL version 3 and version 8.4

In Aurora MySQL version 3 and version 8.4, the user invoking a native function must be granted the `AWS_LAMBDA_ACCESS` role. To grant this role to a user, connect to the DB instance as the administrative user, and run the following statement.

```
GRANT AWS_LAMBDA_ACCESS TO user@domain-or-ip-address
```

You can revoke this role by running the following statement.

```
REVOKE AWS_LAMBDA_ACCESS FROM user@domain-or-ip-address
```

Tip

When you use the role technique in Aurora MySQL version 3, you can also activate the role by using the `SET ROLE role_name` or `SET ROLE ALL` statement. If you aren't familiar with the MySQL 8.0 role system, you can learn more in Role-based privilege model. For more details, see Using roles in the *MySQL Reference Manual*.

This only applies to the current active session. When you reconnect, you must run the `SET ROLE` statement again to grant privileges. For more information, see SET ROLE statement in the *MySQL Reference Manual*.

You can use the `activate_all_roles_on_login` DB cluster parameter to automatically activate all roles when a user connects to a DB instance. When this parameter is set, you generally don't have to call the `SET ROLE` statement explicitly to activate a role. For more information, see activate_all_roles_on_login in the *MySQL Reference Manual*.

However, you must call `SET ROLE ALL` explicitly at the beginning of a stored procedure to activate the role, when the stored procedure is called by a different user.

If you get an error such as the following when you try to invoke a Lambda function, then run a `SET ROLE` statement.

```
SQL Error [1227] [42000]: Access denied; you need (at least one of) the Invoke Lambda
 privilege(s) for this operation
```

Make sure that you're granting the role to the correct user, as shown in the `mysql.users` table entries. There might be multiple users with the same name, but on different hosts. Depending on which application or host is invoking the `lambda_sync` function, MySQL selects the user with the best match according to the `host` column entries.

Granting the privilege in Aurora MySQL version 2

In Aurora MySQL version 2, the user invoking a native function must be granted the `INVOKE LAMBDA` privilege. To grant this privilege to a user, connect to the DB instance as the administrative user, and run the following statement.

```
GRANT INVOKE LAMBDA ON *.* TO user@domain-or-ip-address
```

You can revoke this privilege by running the following statement.

```
REVOKE INVOKE LAMBDA ON *.* FROM user@domain-or-ip-address
```

Syntax for the lambda_sync function

You invoke the `lambda_sync` function synchronously with the `RequestResponse` invocation type. The function returns the result of the Lambda invocation in a JSON payload. The function has the following syntax.

```
lambda_sync (
  lambda_function_ARN,
  JSON_payload
)
```

Parameters for the lambda_sync function

The `lambda_sync` function has the following parameters.

lambda_function_ARN

The Amazon Resource Name (ARN) of the Lambda function to invoke.

JSON_payload

The payload for the invoked Lambda function, in JSON format.

> **Note**
>
> Aurora MySQL version 3 supports the JSON parsing functions from MySQL 8.0. However, Aurora MySQL version 2 doesn't include those functions. JSON parsing isn't required when a Lambda function returns an atomic value, such as a number or a string.

Example for the lambda_sync function

The following query based on `lambda_sync` invokes the Lambda function `BasicTestLambda` synchronously using the function ARN. The payload for the function is `{"operation": "ping"}`.

```
SELECT lambda_sync(
```

```
    'arn:aws-cn:lambda:us-east-1:123456789012:function:BasicTestLambda',
    '{"operation": "ping"}');
```

Syntax for the lambda_async function

You invoke the `lambda_async` function asynchronously with the `Event` invocation type. The function returns the result of the Lambda invocation in a JSON payload. The function has the following syntax.

```
lambda_async (
  lambda_function_ARN,
  JSON_payload
)
```

Parameters for the lambda_async function

The `lambda_async` function has the following parameters.

lambda_function_ARN

The Amazon Resource Name (ARN) of the Lambda function to invoke.

JSON_payload

The payload for the invoked Lambda function, in JSON format.

> **Note**
>
> Aurora MySQL version 3 supports the JSON parsing functions from MySQL 8.0. However, Aurora MySQL version 2 doesn't include those functions. JSON parsing isn't required when a Lambda function returns an atomic value, such as a number or a string.

Example for the lambda_async function

The following query based on `lambda_async` invokes the Lambda function `BasicTestLambda` asynchronously using the function ARN. The payload for the function is `{"operation": "ping"}`.

```
SELECT lambda_async(
    'arn:aws-cn:lambda:us-east-1:123456789012:function:BasicTestLambda',
```

```
    '{"operation": "ping"}');
```

Invoking a Lambda function within a trigger

You can use triggers to call Lambda on data-modifying statements. The following example uses the `lambda_async` native function and stores the result in a variable.

```
mysql>SET @result=0;
mysql>DELIMITER //
mysql>CREATE TRIGGER myFirstTrigger
      AFTER INSERT
          ON Test_trigger FOR EACH ROW
      BEGIN
      SELECT lambda_async(
          'arn:aws-cn:lambda:us-east-1:123456789012:function:BasicTestLambda',
          '{"operation": "ping"}')
          INTO @result;
      END; //
mysql>DELIMITER ;
```

Note

Triggers aren't run once per SQL statement, but once per row modified, one row at a time. When a trigger runs, the process is synchronous. The data-modifying statement only returns when the trigger completes.
Be careful when invoking an Amazon Lambda function from triggers on tables that experience high write traffic. `INSERT`, `UPDATE`, and `DELETE` triggers are activated per row. A write-heavy workload on a table with `INSERT`, `UPDATE`, or `DELETE` triggers results in a large number of calls to your Amazon Lambda function.

Invoking a Lambda function with an Aurora MySQL stored procedure (deprecated)

You can invoke an Amazon Lambda function from an Aurora MySQL DB cluster by calling the `mysql.lambda_async` procedure. This approach can be useful when you want to integrate your database running on Aurora MySQL with other Amazon services. For example, you might want to send a notification using Amazon Simple Notification Service (Amazon SNS) whenever a row is inserted into a specific table in your database.

Contents

- Aurora MySQL version considerations
- Working with the mysql.lambda_async procedure to invoke a Lambda function (deprecated)
  - Syntax
  - Parameters
  - Examples

Aurora MySQL version considerations

Starting in Aurora MySQL version 2, you can use the native function method instead of these stored procedures to invoke a Lambda function. For more information about the native functions, see Working with native functions to invoke a Lambda function.

In Aurora MySQL version 2, the stored procedure `mysql.lambda_async` is no longer supported. We strongly recommend that you work with native Lambda functions instead.

In Aurora MySQL version 3, the stored procedure isn't available.

Working with the mysql.lambda_async procedure to invoke a Lambda function (deprecated)

The `mysql.lambda_async` procedure is a built-in stored procedure that invokes a Lambda function asynchronously. To use this procedure, your database user must have `EXECUTE` privilege on the `mysql.lambda_async` stored procedure.

Syntax

The `mysql.lambda_async` procedure has the following syntax.

```
CALL mysql.lambda_async (
  lambda_function_ARN,
  lambda_function_input
)
```

Parameters

The `mysql.lambda_async` procedure has the following parameters.

lambda_function_ARN

The Amazon Resource Name (ARN) of the Lambda function to invoke.

lambda_function_input

The input string, in JSON format, for the invoked Lambda function.

Examples

As a best practice, we recommend that you wrap calls to the `mysql.lambda_async` procedure in a stored procedure that can be called from different sources such as triggers or client code. This approach can help to avoid impedance mismatch issues and make it easier to invoke Lambda functions.

> **Note**
>
> Be careful when invoking an Amazon Lambda function from triggers on tables that experience high write traffic. `INSERT`, `UPDATE`, and `DELETE` triggers are activated per row. A write-heavy workload on a table with `INSERT`, `UPDATE`, or `DELETE` triggers results in a large number of calls to your Amazon Lambda function.
> Although calls to the `mysql.lambda_async` procedure are asynchronous, triggers are synchronous. A statement that results in a large number of trigger activations doesn't wait for the call to the Amazon Lambda function to complete, but it does wait for the triggers to complete before returning control to the client.

Example: Invoke an Amazon Lambda function to send email

The following example creates a stored procedure that you can call in your database code to send an email using a Lambda function.

Amazon Lambda Function

```
import boto3

ses = boto3.client('ses')

def SES_send_email(event, context):

    return ses.send_email(
        Source=event['email_from'],
        Destination={
```

```
            'ToAddresses': [
            event['email_to'],
            ]
        },

        Message={
            'Subject': {
            'Data': event['email_subject']
            },
            'Body': {
                'Text': {
                    'Data': event['email_body']
                }
            }
        }
    )
```

Stored Procedure

```
DROP PROCEDURE IF EXISTS SES_send_email;
DELIMITER ;;
  CREATE PROCEDURE SES_send_email(IN email_from VARCHAR(255),
                                  IN email_to VARCHAR(255),
                                  IN subject VARCHAR(255),
                                  IN body TEXT) LANGUAGE SQL
  BEGIN
    CALL mysql.lambda_async(
         'arn:aws-cn:lambda:us-west-2:123456789012:function:SES_send_email',
         CONCAT('{"email_to" : "', email_to,
             '", "email_from" : "', email_from,
             '", "email_subject" : "', subject,
             '", "email_body" : "', body, '"}')
     );
  END
  ;;
DELIMITER ;
```

Call the Stored Procedure to Invoke the Amazon Lambda Function

```
mysql> call SES_send_email('example_from@amazon.com', 'example_to@amazon.com', 'Email
 subject', 'Email content');
```

Example: Invoke an Amazon Lambda function to publish an event from a trigger

The following example creates a stored procedure that publishes an event by using Amazon SNS. The code calls the procedure from a trigger when a row is added to a table.

Amazon Lambda Function

```
import boto3

sns = boto3.client('sns')

def SNS_publish_message(event, context):

    return sns.publish(
        TopicArn='arn:aws-cn:sns:us-west-2:123456789012:Sample_Topic',
        Message=event['message'],
        Subject=event['subject'],
        MessageStructure='string'
    )
```

Stored Procedure

```
DROP PROCEDURE IF EXISTS SNS_Publish_Message;
DELIMITER ;;
CREATE PROCEDURE SNS_Publish_Message (IN subject VARCHAR(255),
                                      IN message TEXT) LANGUAGE SQL
BEGIN
  CALL mysql.lambda_async('arn:aws-cn:lambda:us-
west-2:123456789012:function:SNS_publish_message',
     CONCAT('{ "subject" : "', subject,
            '", "message" : "', message, '" }')
     );
END
;;
DELIMITER ;
```

Table

```
CREATE TABLE 'Customer_Feedback' (
  'id' int(11) NOT NULL AUTO_INCREMENT,
  'customer_name' varchar(255) NOT NULL,
  'customer_feedback' varchar(1024) NOT NULL,
```

```
  PRIMARY KEY ('id')
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

Trigger

```
DELIMITER ;;
CREATE TRIGGER TR_Customer_Feedback_AI
  AFTER INSERT ON Customer_Feedback
  FOR EACH ROW
BEGIN
  SELECT CONCAT('New customer feedback from ', NEW.customer_name),
 NEW.customer_feedback INTO @subject, @feedback;
  CALL SNS_Publish_Message(@subject, @feedback);
END
;;
DELIMITER ;
```

Insert a Row into the Table to Trigger the Notification

```
mysql> insert into Customer_Feedback (customer_name, customer_feedback) VALUES ('Sample
 Customer', 'Good job guys!');
```

Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs

You can configure your Aurora MySQL DB cluster to publish general, slow, audit, and error log data to a log group in Amazon CloudWatch Logs. With CloudWatch Logs, you can perform real-time analysis of the log data, and use CloudWatch to create alarms and view metrics. You can use CloudWatch Logs to store your log records in highly durable storage.

To publish logs to CloudWatch Logs, the respective logs must be enabled. Error logs are enabled by default, but you must enable the other types of logs explicitly. For information about enabling logs in MySQL, see Selecting general query and slow query log output destinations in the MySQL documentation. For more information about enabling Aurora MySQL audit logs, see Enabling Advanced Auditing.

Note

- If exporting log data is disabled, Aurora doesn't delete existing log groups or log streams. If exporting log data is disabled, existing log data remains available in CloudWatch Logs, depending on log retention, and you still incur charges for stored audit log data. You can

delete log streams and log groups using the CloudWatch Logs console, the Amazon CLI, or the CloudWatch Logs API.

- An alternative way to publish audit logs to CloudWatch Logs is by enabling Advanced Auditing, then creating a custom DB cluster parameter group and setting the `server_audit_logs_upload` parameter to `1`. The default for the `server_audit_logs_upload` DB cluster parameter is `0`. For information on enabling Advanced Auditing, see Using Advanced Auditing with an Amazon Aurora MySQL DB cluster.

  If you use this alternative method, you must have an IAM role to access CloudWatch Logs and set the `aws_default_logs_role` cluster-level parameter to the ARN for this role. For information about creating the role, see Setting up IAM roles to access Amazon services.
- If you don't want to export audit logs to CloudWatch Logs, make sure that all methods of exporting audit logs are disabled. These methods are the Amazon Web Services Management Console, the Amazon CLI, the RDS API, and the `server_audit_logs_upload` parameter.

Console

You can publish Aurora MySQL logs for provisioned clusters to CloudWatch Logs with the console.

To publish Aurora MySQL logs from the console

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the Aurora MySQL DB cluster that you want to publish the log data for.
4. Choose **Modify**.
5. In the **Log exports** section, choose the logs that you want to start publishing to CloudWatch Logs.
6. Choose **Continue**, and then choose **Modify DB Cluster** on the summary page.

Amazon CLI

You can publish Aurora MySQL logs for provisioned clusters with the Amazon CLI. To do so, you run the modify-db-cluster Amazon CLI command with the following options:

- `--db-cluster-identifier`—The DB cluster identifier.
- `--cloudwatch-logs-export-configuration`—The configuration setting for the log types to be enabled for export to CloudWatch Logs for the DB cluster.

You can also publish Aurora MySQL logs by running one of the following Amazon CLI commands:

- create-db-cluster
- restore-db-cluster-from-s3
- restore-db-cluster-from-snapshot
- restore-db-cluster-to-point-in-time

Run one of these Amazon CLI commands with the following options:

- `--db-cluster-identifier`—The DB cluster identifier.
- `--engine`—The database engine.
- `--enable-cloudwatch-logs-exports`—The configuration setting for the log types to be enabled for export to CloudWatch Logs for the DB cluster.

Other options might be required depending on the Amazon CLI command that you run.

Example

The following command modifies an existing Aurora MySQL DB cluster to publish log files to CloudWatch Logs.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbcluster \
    --cloudwatch-logs-export-configuration '{"EnableLogTypes":
["error","general","slowquery","audit","instance"]}'
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbcluster ^
```

```
    --cloudwatch-logs-export-configuration '{"EnableLogTypes":
["error","general","slowquery","audit","instance"]}'
```

Example

The following command creates an Aurora MySQL DB cluster to publish log files to CloudWatch Logs.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
    --db-cluster-identifier mydbcluster \
    --engine aurora \
    --enable-cloudwatch-logs-exports
 '["error","general","slowquery","audit","instance"]'
```

For Windows:

```
aws rds create-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --engine aurora ^
    --enable-cloudwatch-logs-exports
 '["error","general","slowquery","audit","instance"]'
```

RDS API

You can publish Aurora MySQL logs for provisioned clusters with the RDS API. To do so, you run the ModifyDBCluster operation with the following options:

- `DBClusterIdentifier`—The DB cluster identifier.
- `CloudwatchLogsExportConfiguration`—The configuration setting for the log types to be enabled for export to CloudWatch Logs for the DB cluster.

You can also publish Aurora MySQL logs with the RDS API by running one of the following RDS API operations:

- CreateDBCluster

- RestoreDBClusterFromS3
- RestoreDBClusterFromSnapshot
- RestoreDBClusterToPointInTime

Run the RDS API operation with the following parameters:

- `DBClusterIdentifier`—The DB cluster identifier.
- `Engine`—The database engine.
- `EnableCloudwatchLogsExports`—The configuration setting for the log types to be enabled for export to CloudWatch Logs for the DB cluster.

Other parameters might be required depending on the Amazon CLI command that you run.

Monitoring log events in Amazon CloudWatch

After enabling Aurora MySQL log events, you can monitor the events in Amazon CloudWatch Logs. A new log group is automatically created for the Aurora DB cluster under the following prefix, in which *`cluster-name`* represents the DB cluster name, and *`log_type`* represents the log type.

```
/aws/rds/cluster/cluster-name/log_type
```

For example, if you configure the export function to include the slow query log for a DB cluster named `mydbcluster`, slow query data is stored in the `/aws/rds/cluster/mydbcluster/slowquery` log group.

The events from all instances in your cluster are pushed to a log group using different log streams. The behavior depends on which of the following conditions is true:

- A log group with the specified name exists.

  Aurora uses the existing log group to export log data for the cluster. To create log groups with predefined log retention periods, metric filters, and customer access, you can use automated configuration, such as Amazon CloudFormation.
- A log group with the specified name doesn't exist.

  When a matching log entry is detected in the log file for the instance, Aurora MySQL creates a new log group in CloudWatch Logs automatically. The log group uses the default log retention period of **Never Expire**.

To change the log retention period, use the CloudWatch Logs console, the Amazon CLI, or the CloudWatch Logs API. For more information about changing log retention periods in CloudWatch Logs, see Change log data retention in CloudWatch Logs.

To search for information within the log events for a DB cluster, use the CloudWatch Logs console, the Amazon CLI, or the CloudWatch Logs API. For more information about searching and filtering log data, see Searching and filtering log data.

Amazon Aurora MySQL lab mode

> **Important**
>
> Lab mode was introduced in Aurora MySQL version 2 to enable the Fast DDL optimization, which improved the efficiency of certain DDL operations. In Aurora MySQL version 3 and version 8.4, lab mode has been removed, and Fast DDL has been replaced by the MySQL 8.0 feature called Instant DDL.

Aurora lab mode is used to enable Aurora features that are available in the current Aurora database version, but are not enabled by default. While Aurora lab mode features are not recommended for use in production DB clusters, you can use Aurora lab mode to enable these features for DB clusters in your development and test environments. For more information about Aurora features available when Aurora lab mode is enabled, see Aurora lab mode features.

The `aurora_lab_mode` parameter is an instance-level parameter that is in the default parameter group. The parameter is set to `0` (disabled) in the default parameter group. To enable Aurora lab mode, create a custom parameter group, set the `aurora_lab_mode` parameter to 1 (enabled) in the custom parameter group, and modify one or more DB instances in your Aurora cluster to use the custom parameter group. Then connect to the appropriate instance endpoint to try the lab mode features. For information on modifying a DB parameter group, see Modifying parameters in a DB parameter group in Amazon Aurora. For information on parameter groups and Amazon Aurora, see Aurora MySQL configuration parameters.

Aurora lab mode features

The following Aurora feature is currently available when Aurora lab mode is enabled. You must enable Aurora lab mode before any of these features can be used.

Fast DDL

This feature allows you to run an `ALTER TABLE` *`tbl_name`* `ADD COLUMN` *`col_name column_definition`* operation nearly instantaneously. The operation completes without requiring the table to be copied and without materially impacting other DML statements. Because it doesn't consume temporary storage for a table copy, it makes DDL statements practical even for large tables on small instance classes.

Fast DDL is currently only supported for adding a nullable column, without a default value, at the end of a table. For more information about using this feature, see Altering tables in Amazon Aurora using Fast DDL.

Best practices with Amazon Aurora MySQL

This topic includes information on best practices and options for using or migrating data to an Amazon Aurora MySQL DB cluster. The information in this topic summarizes and reiterates some of the guidelines and procedures that you can find in Managing an Amazon Aurora DB cluster.

Contents

- Determining which DB instance you are connected to
- Best practices for Aurora MySQL performance and scaling
  - Using T instance classes for development and testing
  - Optimizing Aurora MySQL indexed join queries with asynchronous key prefetch
    - Enabling asynchronous key prefetch
    - Optimizing queries for asynchronous key prefetch
  - Optimizing large Aurora MySQL join queries with hash joins
    - Enabling hash joins
    - Optimizing queries for hash joins
  - Using Amazon Aurora to scale reads for your MySQL database
  - Optimizing timestamp operations
  - Virtual index ID overflow errors
- Best practices for Aurora MySQL high availability
  - Using Amazon Aurora for Disaster Recovery with your MySQL databases
  - Migrating from MySQL to Amazon Aurora MySQL with reduced downtime
  - Avoiding slow performance, automatic restart, and failover for Aurora MySQL DB instances
- Recommendations for MySQL features in Aurora MySQL
  - Using multithreaded replication in Aurora MySQL
  - Invoking Amazon Lambda functions using native MySQL functions
  - Avoiding XA transactions with Amazon Aurora MySQL
  - Keeping foreign keys turned on during DML statements
  - Configuring how frequently the log buffer is flushed
  - Minimizing and troubleshooting Aurora MySQL deadlocks
    - Minimizing InnoDB deadlocks
    - Monitoring InnoDB deadlocks

- Evaluating DB instance usage for Aurora MySQL with Amazon CloudWatch metrics

Determining which DB instance you are connected to

To determine which DB instance in an Aurora MySQL DB cluster a connection is connected to, check the `innodb_read_only` global variable, as shown in the following example.

```
SHOW GLOBAL VARIABLES LIKE 'innodb_read_only';
```

The `innodb_read_only` variable is set to `ON` if you are connected to a reader DB instance. This setting is `OFF` if you are connected to a writer DB instance, such as primary instance in a provisioned cluster.

This approach can be helpful if you want to add logic to your application code to balance the workload or to ensure that a write operation is using the correct connection.

Best practices for Aurora MySQL performance and scaling

You can apply the following best practices to improve the performance and scalability of your Aurora MySQL clusters.

Topics

- Using T instance classes for development and testing
- Optimizing Aurora MySQL indexed join queries with asynchronous key prefetch
- Optimizing large Aurora MySQL join queries with hash joins
- Using Amazon Aurora to scale reads for your MySQL database
- Optimizing timestamp operations
- Virtual index ID overflow errors

Using T instance classes for development and testing

Amazon Aurora MySQL instances that use the `db.t2`, `db.t3`, or `db.t4g` DB instance classes are best suited for applications that do not support a high workload for an extended amount of time. The T instances are designed to provide moderate baseline performance and the capability to burst to significantly higher performance as required by your workload. They are intended for workloads

that don't use the full CPU often or consistently, but occasionally need to burst. We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see Burstable performance instances.

If your Aurora cluster is larger than 40 TB, don't use the T instance classes. When your database has a large volume of data, the memory overhead for managing schema objects can exceed the capacity of a T instance.

Don't enable the MySQL Performance Schema on Amazon Aurora MySQL T instances. If the Performance Schema is enabled, the instance might run out of memory.

> **Tip**
>
> If your database is sometimes idle but at other times has a substantial workload, you can use Aurora serverless as an alternative to T instances. With Aurora serverless, you define a capacity range and Aurora automatically scales your database up or down depending on the current workload. For usage details, see Using Aurora serverless. For the database engine versions that you can use with Aurora serverless, see Requirements and limitations for Aurora serverless.

When you use a T instance as a DB instance in an Aurora MySQL DB cluster, we recommend the following:

- Use the same DB instance class for all instances in your DB cluster. For example, if you use `db.t2.medium` for your writer instance, then we recommend that you use `db.t2.medium` for your reader instances also.
- Don't adjust any memory-related configuration settings, such as `innodb_buffer_pool_size`. Aurora uses a highly tuned set of default values for memory buffers on T instances. These special defaults are needed for Aurora to run on memory-constrained instances. If you change any memory-related settings on a T instance, you are much more likely to encounter out-of-memory conditions, even if your change is intended to increase buffer sizes.
- Monitor your CPU Credit Balance (`CPUCreditBalance`) to ensure that it is at a sustainable level. That is, CPU credits are being accumulated at the same rate as they are being used.

  When you have exhausted the CPU credits for an instance, you see an immediate drop in the available CPU and an increase in the read and write latency for the instance. This situation results in a severe decrease in the overall performance of the instance.

If your CPU credit balance is not at a sustainable level, then we recommend that you modify your DB instance to use a one of the supported R DB instance classes (scale compute).

For more information on monitoring metrics, see Viewing metrics in the Amazon RDS console.

- Monitor the replica lag (`AuroraReplicaLag`) between the writer instance and the reader instances.

  If a reader instance runs out of CPU credits before the writer instance does, the resulting lag can cause the reader instance to restart frequently. This result is common when an application has a heavy load of read operations distributed among reader instances, at the same time that the writer instance has a minimal load of write operations.

  If you see a sustained increase in replica lag, make sure that your CPU credit balance for the reader instances in your DB cluster is not being exhausted.

  If your CPU credit balance is not at a sustainable level, then we recommend that you modify your DB instance to use one of the supported R DB instance classes (scale compute).

- Keep the number of inserts per transaction below 1 million for DB clusters that have binary logging enabled.

  If the DB cluster parameter group for your DB cluster has the `binlog_format` parameter set to a value other than `OFF`, then your DB cluster might experience out-of-memory conditions if the DB cluster receives transactions that contain over 1 million rows to insert. You can monitor the freeable memory (`FreeableMemory`) metric to determine if your DB cluster is running out of available memory. You then check the write operations (`VolumeWriteIOPS`) metric to see if a writer instance is receiving a heavy load of write operations. If this is the case, then we recommend that you update your application to limit the number of inserts in a transaction to less than 1 million. Alternatively, you can modify your instance to use one of the supported R DB instance classes (scale compute).

Optimizing Aurora MySQL indexed join queries with asynchronous key prefetch

Aurora MySQL can use the asynchronous key prefetch (AKP) feature to improve the performance of queries that join tables across indexes. This feature improves performance by anticipating the rows needed to run queries in which a JOIN query requires use of the Batched Key Access (BKA) Join algorithm and Multi-Range Read (MRR) optimization features. For more information about BKA

and MRR, see Block nested-loop and batched key access joins and Multi-range read optimization in the MySQL documentation.

To take advantage of the AKP feature, a query must use both BKA and MRR. Typically, such a query occurs when the JOIN clause of a query uses a secondary index, but also needs some columns from the primary index. For example, you can use AKP when a JOIN clause represents an equijoin on index values between a small outer and large inner table, and the index is highly selective on the larger table. AKP works in concert with BKA and MRR to perform a secondary to primary index lookup during the evaluation of the JOIN clause. AKP identifies the rows required to run the query during the evaluation of the JOIN clause. It then uses a background thread to asynchronously load the pages containing those rows into memory before running the query.

AKP is available for Aurora MySQL version 2.10 and higher, and version 3. For more information about Aurora MySQL versions, see Database engine updates for Amazon Aurora MySQL.

Enabling asynchronous key prefetch

You can enable the AKP feature by setting `aurora_use_key_prefetch`, a MySQL server variable, to on. By default, this value is set to on. However, AKP can't be enabled until you also enable the BKA Join algorithm and disable cost-based MRR functionality. To do so, you must set the following values for `optimizer_switch`, a MySQL server variable:

- Set `batched_key_access` to on. This value controls the use of the BKA Join algorithm. By default, this value is set to `off`.
- Set `mrr_cost_based` to `off`. This value controls the use of cost-based MRR functionality. By default, this value is set to on.

Currently, you can set these values only at the session level. The following example illustrates how to set these values to enable AKP for the current session by executing SET statements.

```
mysql> set @@session.aurora_use_key_prefetch=on;
mysql> set @@session.optimizer_switch='batched_key_access=on,mrr_cost_based=off';
```

Similarly, you can use SET statements to disable AKP and the BKA Join algorithm and re-enable cost-based MRR functionality for the current session, as shown in the following example.

```
mysql> set @@session.aurora_use_key_prefetch=off;
```

```
mysql> set @@session.optimizer_switch='batched_key_access=off,mrr_cost_based=on';
```

For more information about the **batched_key_access** and **mrr_cost_based** optimizer switches, see Switchable optimizations in the MySQL documentation.

Optimizing queries for asynchronous key prefetch

You can confirm whether a query can take advantage of the AKP feature. To do so, use the `EXPLAIN` statement to profile the query before running it. The `EXPLAIN` statement provides information about the execution plan to use for a specified query.

In the output for the `EXPLAIN` statement, the `Extra` column describes additional information included with the execution plan. If the AKP feature applies to a table used in the query, this column includes one of the following values:

- `Using Key Prefetching`
- `Using join buffer (Batched Key Access with Key Prefetching)`

The following example shows the use of `EXPLAIN` to view the execution plan for a query that can take advantage of AKP.

```
mysql> explain select sql_no_cache
    ->     ps_partkey,
    ->     sum(ps_supplycost * ps_availqty) as value
    -> from
    ->     partsupp,
    ->     supplier,
    ->     nation
    -> where
    ->     ps_suppkey = s_suppkey
    ->     and s_nationkey = n_nationkey
    ->     and n_name = 'ETHIOPIA'
    -> group by
    ->     ps_partkey having
    ->         sum(ps_supplycost * ps_availqty) > (
    ->             select
    ->                 sum(ps_supplycost * ps_availqty) * 0.0000003333
    ->             from
    ->                 partsupp,
    ->                 supplier,
```

```
    ->                 nation
    ->             where
    ->                 ps_suppkey = s_suppkey
    ->                 and s_nationkey = n_nationkey
    ->                 and n_name = 'ETHIOPIA'
    ->         )
    -> order by
    ->     value desc;
+----+-------------+----------+------+----------------------+--------------
+---------+-----------------------------------+------+----------
+-------------------------------------------------------------+
| id | select_type | table    | type | possible_keys        | key          | key_len
 | ref                               | rows | filtered | Extra
                              |
+----+-------------+----------+------+----------------------+--------------
+---------+-----------------------------------+------+----------
+-------------------------------------------------------------+
|  1 | PRIMARY     | nation   | ALL  | PRIMARY              | NULL         | NULL
 | NULL                              |   25 |   100.00 | Using where; Using temporary;
 Using filesort                |
|  1 | PRIMARY     | supplier | ref  | PRIMARY,i_s_nationkey | i_s_nationkey | 5
 | dbt3_scale_10.nation.n_nationkey | 2057 |   100.00 | Using index
                              |
|  1 | PRIMARY     | partsupp | ref  | i_ps_suppkey         | i_ps_suppkey  | 4
 | dbt3_scale_10.supplier.s_suppkey |   42 |   100.00 | Using join buffer (Batched Key
 Access with Key Prefetching) |
|  2 | SUBQUERY    | nation   | ALL  | PRIMARY              | NULL         | NULL
 | NULL                              |   25 |   100.00 | Using where
                              |
|  2 | SUBQUERY    | supplier | ref  | PRIMARY,i_s_nationkey | i_s_nationkey | 5
 | dbt3_scale_10.nation.n_nationkey | 2057 |   100.00 | Using index
                              |
|  2 | SUBQUERY    | partsupp | ref  | i_ps_suppkey         | i_ps_suppkey  | 4
 | dbt3_scale_10.supplier.s_suppkey |   42 |   100.00 | Using join buffer (Batched Key
 Access with Key Prefetching) |
+----+-------------+----------+------+----------------------+--------------
+---------+-----------------------------------+------+----------
+-------------------------------------------------------------+
6 rows in set, 1 warning (0.00 sec)
```

For more information about the EXPLAIN output format, see Extended EXPLAIN output format in the MySQL documentation.

Optimizing large Aurora MySQL join queries with hash joins

When you need to join a large amount of data by using an equijoin, a hash join can improve query performance. You can enable hash joins for Aurora MySQL.

A hash join column can be any complex expression. In a hash join column, you can compare across data types in the following ways:

- You can compare anything across the category of precise numeric data types, such as `int`, `bigint`, `numeric`, and `bit`.
- You can compare anything across the category of approximate numeric data types, such as `float` and `double`.
- You can compare items across string types if the string types have the same character set and collation.
- You can compare items with date and timestamp data types if the types are the same.

> **Note**
>
> You can't compare data types in different categories.

The following restrictions apply to hash joins for Aurora MySQL:

- Left-right outer joins aren't supported for Aurora MySQL version 2, but are supported for version 3.
- Semijoins such as subqueries aren't supported, unless the subqueries are materialized first.
- Multiple-table updates or deletes aren't supported.

  > **Note**
  >
  > Single-table updates or deletes are supported.

- BLOB and spatial data type columns can't be join columns in a hash join.

Enabling hash joins

To enable hash joins:

- Aurora MySQL version 2 – Set the DB parameter or DB cluster parameter `aurora_disable_hash_join` to `0`. Turning off `aurora_disable_hash_join` sets the value of `optimizer_switch` to `hash_join=on`.
- Aurora MySQL version 3 – Set the MySQL server parameter `optimizer_switch` to `block_nested_loop=on`.

Hash joins are turned on by default in Aurora MySQL version 3 and turned off by default in Aurora MySQL version 2. The following example illustrates how to enable hash joins for Aurora MySQL version 3. You can issue the statement `select @@optimizer_switch` first to see what other settings are present in the SET parameter string. Updating one setting in the `optimizer_switch` parameter doesn't erase or modify the other settings.

```
mysql> SET optimizer_switch='block_nested_loop=on';
```

Note

For Aurora MySQL version 3, hash join support is available in all minor versions and is turned on by default.
For Aurora MySQL version 2, hash join support is available in all minor versions.
In Aurora MySQL version 2, the hash join feature is always controlled by the `aurora_disable_hash_join` value.

With this setting, the optimizer chooses to use a hash join based on cost, query characteristics, and resource availability. If the cost estimation is incorrect, you can force the optimizer to choose a hash join. You do so by setting `hash_join_cost_based`, a MySQL server variable, to `off`. The following example illustrates how to force the optimizer to choose a hash join.

```
mysql> SET optimizer_switch='hash_join_cost_based=off';
```

Note

This setting overrides the decisions of the cost-based optimizer. While the setting can be useful for testing and development, we recommend that you not use it in production.

Optimizing queries for hash joins

To find out whether a query can take advantage of a hash join, use the EXPLAIN statement to profile the query first. The EXPLAIN statement provides information about the execution plan to use for a specified query.

In the output for the EXPLAIN statement, the `Extra` column describes additional information included with the execution plan. If a hash join applies to the tables used in the query, this column includes values similar to the following:

- `Using where; Using join buffer (Hash Join Outer table` *`table1_name`*`)`
- `Using where; Using join buffer (Hash Join Inner table` *`table2_name`*`)`

The following example shows the use of EXPLAIN to view the execution plan for a hash join query.

```
mysql> explain SELECT sql_no_cache * FROM hj_small, hj_big, hj_big2
    ->     WHERE hj_small.col1 = hj_big.col1 and hj_big.col1=hj_big2.col1 ORDER BY 1;
+----+-------------+----------+------+---------------+------+---------+------+------
+----------------------------------------------------------------+
| id | select_type | table    | type | possible_keys | key  | key_len | ref  | rows |
 Extra                                                          |
+----+-------------+----------+------+---------------+------+---------+------+------
+----------------------------------------------------------------+
|  1 | SIMPLE      | hj_small | ALL  | NULL          | NULL | NULL    | NULL |    6 |
 Using temporary; Using filesort                                |
|  1 | SIMPLE      | hj_big   | ALL  | NULL          | NULL | NULL    | NULL |   10 |
 Using where; Using join buffer (Hash Join Outer table hj_big)  |
|  1 | SIMPLE      | hj_big2  | ALL  | NULL          | NULL | NULL    | NULL |   15 |
 Using where; Using join buffer (Hash Join Inner table hj_big2) |
+----+-------------+----------+------+---------------+------+---------+------+------
+----------------------------------------------------------------+
3 rows in set (0.04 sec)
```

In the output, the `Hash Join Inner table` is the table used to build hash table, and the `Hash Join Outer table` is the table that is used to probe the hash table.

For more information about the extended EXPLAIN output format, see Extended EXPLAIN Output Format in the MySQL product documentation.

In Aurora MySQL 2.08 and higher, you can use SQL hints to influence whether a query uses hash join or not, and which tables to use for the build and probe sides of the join. For details, see Aurora MySQL hints.

Using Amazon Aurora to scale reads for your MySQL database

You can use Amazon Aurora with your MySQL DB instance to take advantage of the read scaling capabilities of Amazon Aurora and expand the read workload for your MySQL DB instance. To use Aurora to read scale your MySQL DB instance, create an Aurora MySQL DB cluster and make it a read replica of your MySQL DB instance. Then connect to the Aurora MySQL cluster to process the read queries. The source database can be an RDS for MySQL DB instance, or a MySQL database running external to Amazon RDS. For more information, see Scaling reads for your MySQL database with Amazon Aurora.

Optimizing timestamp operations

When the value of the system variable `time_zone` is set to `SYSTEM`, each MySQL function call that requires a time zone calculation makes a system library call. When you run SQL statements that return or change such `TIMESTAMP` values at high concurrency, you might experience increased latency, lock contention, and CPU usage. For more information, see time_zone in the MySQL documentation.

To avoid this behavior, we recommend that you change the value of the `time_zone` DB cluster parameter to UTC. For more information, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

While the `time_zone` parameter is dynamic (doesn't require a database server restart), the new value is used only for new connections. To make sure that all connections are updated to use the new `time_zone` value, we recommend that you recycle your application connections after updating the DB cluster parameter.

Virtual index ID overflow errors

Aurora MySQL limits values for virtual index IDs to 8 bits prevent an issue caused by the undo format in MySQL. If an index exceeds the virtual index ID limit, your cluster might not be available. When an index approaches the virtual index ID limit or when you attempt to create an index above the virtual index ID limit, RDS might throw error code 63955 or warning code 63955. To address a virtual index ID limit error, we recommend you recreate your database with a logical dump and restore.

For more information about logical dump and restore for Amazon Aurora MySQL, see Migrate very large databases to Amazon Aurora MySQL using MyDumper and MyLoader. Fore more information about accessing error logs in Amazon Aurora, see Monitoring Amazon Aurora log files.

Best practices for Aurora MySQL high availability

You can apply the following best practices to improve the availability of your Aurora MySQL clusters.

Topics

- Using Amazon Aurora for Disaster Recovery with your MySQL databases
- Migrating from MySQL to Amazon Aurora MySQL with reduced downtime
- Avoiding slow performance, automatic restart, and failover for Aurora MySQL DB instances

Using Amazon Aurora for Disaster Recovery with your MySQL databases

You can use Amazon Aurora with your MySQL DB instance to create an offsite backup for disaster recovery. To use Aurora for disaster recovery of your MySQL DB instance, create an Amazon Aurora DB cluster and make it a read replica of your MySQL DB instance. This applies to an RDS for MySQL DB instance, or a MySQL database running external to Amazon RDS.

> **Important**
>
> When you set up replication between a MySQL DB instance and an Amazon Aurora MySQL DB cluster, you should monitor the replication to ensure that it remains healthy and repair it if necessary.

For instructions on how to create an Amazon Aurora MySQL DB cluster and make it a read replica of your MySQL DB instance, follow the procedure in Using Amazon Aurora to scale reads for your MySQL database.

For more information on disaster recovery models, see How to choose the best disaster recovery option for your Amazon Aurora MySQL cluster.

Migrating from MySQL to Amazon Aurora MySQL with reduced downtime

When importing data from a MySQL database that supports a live application to an Amazon Aurora MySQL DB cluster, you might want to reduce the time that service is interrupted while you

migrate. To do so, you can use the procedure documented in Importing data to an Amazon RDS for MySQL DB instance with reduced downtime in the *Amazon Relational Database Service User Guide*. This procedure can especially help if you are working with a very large database. You can use the procedure to reduce the cost of the import by minimizing the amount of data that is passed across the network to Amazon.

The procedure lists steps to transfer a copy of your database data to an Amazon EC2 instance and import the data into a new RDS for MySQL DB instance. Because Amazon Aurora is compatible with MySQL, you can instead use an Amazon Aurora DB cluster for the target Amazon RDS MySQL DB instance.

Avoiding slow performance, automatic restart, and failover for Aurora MySQL DB instances

If you're running a heavy workload or workloads that spike beyond the allocated resources of your DB instance, you can exhaust the resources on which you're running your application and Aurora database. To get metrics on your database instance such as CPU utilization, memory usage, and number of database connections used, you can refer to the metrics provided by Amazon CloudWatch, Performance Insights, and Enhanced Monitoring. For more information on monitoring your DB instance, see Monitoring metrics in an Amazon Aurora cluster.

If your workload exhausts the resources you're using, your DB instance might slow down, restart, or even fail over to another DB instance. To avoid this, monitor your resource utilization, examine the workload running on your DB instance, and make optimizations where necessary. If optimizations don't improve the instance metrics and mitigate the resource exhaustion, consider scaling up your DB instance before you reach its limits. For more information on available DB instance classes and their specifications, see Amazon AuroraDB instance classes.

Recommendations for MySQL features in Aurora MySQL

The following features are available in Aurora MySQL for MySQL compatibility. However, they have performance, scalability, stability, or compatibility issues in the Aurora environment. Thus, we recommend that you follow certain guidelines in your use of these features. For example, we recommend that you don't use certain features for production Aurora deployments.

Topics

- Using multithreaded replication in Aurora MySQL
- Invoking Amazon Lambda functions using native MySQL functions

- Avoiding XA transactions with Amazon Aurora MySQL
- Keeping foreign keys turned on during DML statements
- Configuring how frequently the log buffer is flushed
- Minimizing and troubleshooting Aurora MySQL deadlocks

Using multithreaded replication in Aurora MySQL

With multithreaded binary log replication, a SQL thread reads events from the relay log and queues them up for SQL worker threads to apply. The SQL worker threads are managed by a coordinator thread. The binary log events are applied in parallel when possible.

Multithreaded replication is supported in Aurora MySQL version 3, and in Aurora MySQL version 2.12.1 and higher.

For Aurora MySQL versions lower than 3.04, Aurora uses single-threaded replication by default when an Aurora MySQL DB cluster is used as a read replica for binary log replication.

Earlier versions of Aurora MySQL version 2 inherited several issues regarding multithreaded replication from MySQL Community Edition. For those versions, we recommend that you not use multithreaded replication in production.

If you do use multithreaded replication, we recommend that you test it thoroughly.

For more information about using replication in Amazon Aurora, see Replication with Amazon Aurora. For more information about multithreaded replication in Aurora MySQL, see Multithreaded binary log replication.

Invoking Amazon Lambda functions using native MySQL functions

We recommend using the native MySQL functions `lambda_sync` and `lambda_async` to invoke Lambda functions.

If you are using the deprecated `mysql.lambda_async` procedure, we recommend that you wrap calls to the `mysql.lambda_async` procedure in a stored procedure. You can call this stored procedure from different sources, such as triggers or client code. This approach can help to avoid impedance mismatch issues and make it easier for your database programmers to invoke Lambda functions.

For more information on invoking Lambda functions from Amazon Aurora, see Invoking a Lambda function from an Amazon Aurora MySQL DB cluster.

Avoiding XA transactions with Amazon Aurora MySQL

We recommend that you don't use eXtended Architecture (XA) transactions with Aurora MySQL, because they can cause long recovery times if the XA was in the PREPARED state. If you must use XA transactions with Aurora MySQL, follow these best practices:

- Don't leave an XA transaction open in the PREPARED state.
- Keep XA transactions as small as possible.

For more information about using XA transactions with MySQL, see XA transactions in the MySQL documentation.

Keeping foreign keys turned on during DML statements

We strongly recommend that you don't run any data definition language (DDL) statements when the `foreign_key_checks` variable is set to `0` (off).

If you need to insert or update rows that require a transient violation of foreign keys, follow these steps:

1. Set `foreign_key_checks` to `0`.
2. Make your data manipulation language (DML) changes.
3. Make sure that your completed changes don't violate any foreign key constraints.
4. Set `foreign_key_checks` to `1` (on).

In addition, follow these other best practices for foreign key constraints:

- Make sure that your client applications don't set the `foreign_key_checks` variable to `0` as a part of the `init_connect` variable.
- If a restore from a logical backup such as `mysqldump` fails or is incomplete, make sure that `foreign_key_checks` is set to `1` before starting any other operations in the same session. A logical backup sets `foreign_key_checks` to `0` when it starts.

Configuring how frequently the log buffer is flushed

In MySQL Community Edition, to make transactions durable, the InnoDB log buffer must be flushed to durable storage. You use the`innodb_flush_log_at_trx_commit` parameter to configure how frequently the log buffer is flushed to disk.

When you set the `innodb_flush_log_at_trx_commit` parameter to the default value of 1, the log buffer is flushed at each transaction commit. This setting helps to keep the database ACID compliant. We recommend that you keep the default setting of 1.

Changing `innodb_flush_log_at_trx_commit` to a nondefault value can help reduce data manipulation language (DML) latency, but sacrifices the durability of the log records. This lack of durability makes the database ACID noncompliant. We recommend that your databases be ACID compliant to avoid the risk of data loss in the event of a server restart. For more information on this parameter, see innodb_flush_log_at_trx_commit in the MySQL documentation.

In Aurora MySQL, redo log processing is offloaded to the storage layer, so no flushing to log files occurs on the DB instance. When a write is issued, redo logs are sent from the writer DB instance directly to the Aurora cluster volume. The only writes that cross the network are redo log records. No pages are ever written from the database tier.

By default, each thread committing a transaction waits for confirmation from the Aurora cluster volume. This confirmation indicates that this record and all previous redo log records are written and have achieved quorum. Persisting the log records and achieving quorum make the transaction durable, whether through autocommit or explicit commit. For more information on the Aurora storage architecture, see Amazon Aurora storage demystified.

Aurora MySQL doesn't flush logs to data files as MySQL Community Edition does. However, you can use the `innodb_flush_log_at_trx_commit` parameter to relax durability constraints when writing redo log records to the Aurora cluster volume.

For Aurora MySQL version 2:

- `innodb_flush_log_at_trx_commit` = 0 or 2 – The database doesn't wait for confirmation that the redo log records are written to the Aurora cluster volume.
- `innodb_flush_log_at_trx_commit` = 1 – The database waits for confirmation that the redo log records are written to the Aurora cluster volume.

For Aurora MySQL version 3:

- `innodb_flush_log_at_trx_commit` = 0 – The database doesn't wait for confirmation that the redo log records are written to the Aurora cluster volume.
- `innodb_flush_log_at_trx_commit` = 1 or 2 – The database waits for confirmation that the redo log records are written to the Aurora cluster volume.

Therefore, to obtain the same nondefault behavior in Aurora MySQL version 3 that you would with the value set to 0 or 2 in Aurora MySQL version 2, set the parameter to 0.

While these settings can lower DML latency to the client, they can also result in data loss in the event of a failover or restart. Therefore, we recommend that you keep the `innodb_flush_log_at_trx_commit` parameter set to the default value of 1.

While data loss can occur in both MySQL Community Edition and Aurora MySQL, behavior differs in each database because of their different architectures. These architectural differences can lead to varying degrees of data loss. To make sure that your database is ACID compliant, always set `innodb_flush_log_at_trx_commit` to 1.

> **Note**
>
> In Aurora MySQL version 3, before you can change `innodb_flush_log_at_trx_commit` to a value other than 1, you must first change the value of `innodb_trx_commit_allow_data_loss` to 1. By doing so, you acknowledge the risk of data loss.

Minimizing and troubleshooting Aurora MySQL deadlocks

Users running workloads that regularly experience constraint violations on unique secondary indexes or foreign keys, when modifying records on the same data page concurrently, might experience increased deadlocks and lock wait timeouts. These deadlocks and timeouts are because of a MySQL Community Edition bug fix.

This fix is included in MySQL Community Edition versions 5.7.26 and higher, and was backported into Aurora MySQL versions 2.10.3 and higher. The fix is necessary for enforcing *serializability*, by implementing additional locking for these types of data manipulation language (DML) operations, on changes made to records in an InnoDB table. This issue was uncovered as part of an investigation into deadlock issues introduced by a previous MySQL Community Edition bug fix.

The fix changed the internal handling for the *partial rollback* of a tuple (row) update in the InnoDB storage engine. Operations that generate constraint violations on foreign keys or unique secondary indexes cause partial rollback. This includes, but isn't limited to, concurrent `INSERT...ON DUPLICATE KEY UPDATE`, `REPLACE INTO`, and `INSERT IGNORE` statements (*upserts*).

In this context, partial rollback doesn't refer to the rollback of application-level transactions, but rather an internal InnoDB rollback of changes to a clustered index, when a constraint violation is encountered. For example, a duplicate key value is found during an upsert operation.

In a normal insert operation, InnoDB atomically creates clustered and secondary index entries for each index. If InnoDB detects a duplicate value on a unique secondary index during an upsert operation, the inserted entry in the clustered index has to be reverted (partial rollback), and the update then has to be applied to the existing duplicate row. During this internal partial rollback step, InnoDB must lock each record seen as part of the operation. The fix ensures transaction serializability by introducing additional locking after the partial rollback.

Minimizing InnoDB deadlocks

You can take the following approaches to reduce the frequency of deadlocks in your database instance. More examples can be found in the MySQL documentation.

1. To reduce the chances of deadlocks, commit transactions immediately after making a related set of changes. You can do this by breaking up large transactions (multiple row updates between commits) into smaller ones. If you're batch inserting rows, then try to reduce batch insert sizes, especially when using the upsert operations mentioned previously.

   To reduce the number of possible partial rollbacks, you can try some of the following approaches:

   a. Replace batch insert operations with inserting one row at a time. This can reduce the amount of time where locks are held by transactions that might have conflicts.

   b. Instead of using `REPLACE INTO`, rewrite the SQL statement as a multistatement transaction such as the following:

   ```
   BEGIN;
   DELETE conflicting rows;
   INSERT new rows;
   COMMIT;
   ```

   c. Instead of using `INSERT...ON DUPLICATE KEY UPDATE`, rewrite the SQL statement as a multistatement transaction such as the following:

```
BEGIN;
SELECT rows that conflict on secondary indexes;
UPDATE conflicting rows;
INSERT new rows;
COMMIT;
```

2. Avoid long-running transactions, active or idle, that might hold onto locks. This includes interactive MySQL client sessions that might be open for an extended period with an uncommitted transaction. When optimizing transaction sizes or batch sizes, the impact can vary depending on a number of factors such as concurrency, number of duplicates, and table structure. Any changes should be implemented and tested based on your workload.
3. In some situations, deadlocks can occur when two transactions attempt to access the same datasets, either in one or multiple tables, in different orders. To prevent this, you can modify the transactions to access the data in the same order, thereby serializing the access. For example, create a queue of transactions to be completed. This approach can help to avoid deadlocks when multiple transactions occur concurrently.
4. Adding carefully chosen indexes to your tables can improve selectivity and reduce the need to access rows, which leads to less locking.
5. If you encounter gap locking, you can modify the transaction isolation level to `READ COMMITTED` for the session or transaction to prevent it. For more information on InnoDB isolation levels and their behaviors, see Transaction isolation levels in the MySQL documentation.

> **Note**
>
> While you can take precautions to reduce the possibility of deadlocks occurring, deadlocks are an expected database behavior and can still occur. Applications should have the necessary logic to handle deadlocks when they are encountered. For example, implement retry and backing-off logic in the application. It's best to address the root cause of the issue but if a deadlock does occur, the application has the option to wait and retry.

Monitoring InnoDB deadlocks

Deadlocks can occur in MySQL when application transactions try to take table-level and row-level locks in a way that results in circular waiting. An occasional InnoDB deadlock isn't necessarily

an issue, because the InnoDB storage engine detects the condition immediately and rolls back one of the transactions automatically. If you encounter deadlocks frequently, we recommend reviewing and modifying your application to alleviate performance issues and avoid deadlocks. When deadlock detection is turned on (the default), InnoDB automatically detects transaction deadlocks and rolls back a transaction or transactions to break the deadlock. InnoDB tries to pick small transactions to roll back, where the size of a transaction is determined by the number of rows inserted, updated, or deleted.

- `SHOW ENGINE` statement – The `SHOW ENGINE INNODB STATUS \G` statement contains details of the most recent deadlock encountered on the database since the last restart.
- MySQL error log – If you encounter frequent deadlocks where the output of the `SHOW ENGINE` statement is inadequate, you can turn on the innodb_print_all_deadlocks DB cluster parameter.

  When this parameter is turned on, information about all deadlocks in InnoDB user transactions is recorded in the Aurora MySQL error log.
- Amazon CloudWatch metrics – We also recommend that you proactively monitor deadlocks using the CloudWatch metric `Deadlocks`. For more information, see Instance-level metrics for Amazon Aurora.
- Amazon CloudWatch Logs – With CloudWatch Logs, you can view metrics, analyze log data, and create real-time alarms. For more information, see Monitor errors in Amazon Aurora MySQL and Amazon RDS for MySQL using Amazon CloudWatch and send notifications using Amazon SNS.

  Using CloudWatch Logs with `innodb_print_all_deadlocks` turned on, you can configure alarms to notify you when the number of deadlocks exceeds a given threshold. To define a threshold, we recommend that you observe your trends and use a value based on your normal workload.
- Performance Insights – When you use Performance Insights, you can monitor the `innodb_deadlocks` and `innodb_lock_wait_timeout` metrics. For more information on these metrics, see Non-native counters for Aurora MySQL.

Evaluating DB instance usage for Aurora MySQL with Amazon CloudWatch metrics

You can use CloudWatch metrics to monitor your DB instance throughput and determine whether your DB instance class provides sufficient resources for your applications. For information about

your DB instance class limits, see Hardware specifications for DB instance classes for Aurora. Find the specifications for your DB instance class to find the network performance.

If your DB instance usage is near the instance class limit, then performance may begin to slow. The CloudWatch metrics can confirm this situation so you can plan to manually scale-up to a larger instance class.

Combine the following CloudWatch metrics values to find out if you are nearing the instance class limit:

- **NetworkThroughput** – The amount of network throughput received and transmitted by the clients for each instance in the Aurora DB cluster. This throughput value doesn't include network traffic between instances in the DB cluster and the cluster volume.
- **StorageNetworkThroughput** – The amount of network throughput received and sent to the Aurora storage subsystem by each instance in the Aurora DB cluster.

Add the **NetworkThroughput** to the **StorageNetworkThroughput** to find the network throughput received from and sent to the Aurora storage subsystem by each instance in your Aurora DB cluster. The instance class limit for your instance should be greater than the sum of these two combined metrics.

You can use the following metrics to review additional details of the network traffic from your client applications when sending and receiving:

- **NetworkReceiveThroughput** – The amount of network throughput received from clients by each DB instance in the Aurora MySQL DB cluster. This throughput doesn't include network traffic between instances in the DB cluster and the cluster volume.
- **NetworkTransmitThroughput** – The amount of network throughput sent to clients by each instance in the Aurora DB cluster. This throughput doesn't include network traffic between instances in the DB cluster and the cluster volume.
- **StorageNetworkReceiveThroughput** – The amount of network throughput received from the Aurora storage subsystem by each instance in the DB cluster.
- **StorageNetworkTransmitThroughput** – The amount of network throughput sent to the Aurora storage subsystem by each instance in the DB cluster.

Add all of these metrics together to evaluate how your network usage compares to the DB instance class limit. The instance class limit should be greater than the sum of these combined metrics.

The network limits and CPU usage for storage are directly related. When the network throughput increases, then the CPU usage also increases. Monitoring the CPU and network usage provides information about how and why the resources are being exhausted.

To help minimize network usage, you can consider the following:

- Using a larger DB instance class.
- Dividing the write requests in batches to reduce overall transactions.
- Directing the read-only workload to a read-only instance.
- Deleting any unused indexes.

Troubleshooting Amazon Aurora MySQL database performance

This topic focuses on some common Aurora MySQL DB performance issues, and how to troubleshoot or collect information to remediate these issues quickly. We divide database performance into two categories:

- Server performance – The entire database server runs slower.
- Query performance – One or more queries take longer to run.

For information about troubleshooting replication lag on Aurora MySQL DB clusters, see Troubleshooting binary log replication lag for Aurora MySQL.

Amazon monitoring options

We recommend that you use the following Amazon monitoring options to help with troubleshooting:

- Amazon CloudWatch – Amazon CloudWatch monitors your Amazon resources and the applications you run on Amazon in real time. You can use CloudWatch to collect and track metrics, which are variables you can measure for your resources and applications. For more information, see What is Amazon CloudWatch?.

  You can view all of the system metrics and process information for your DB instances on the Amazon Web Services Management Console. You can configure your Aurora MySQL DB cluster to publish general, slow, audit, and error log data to a log group in Amazon CloudWatch Logs. This allows you to view trends, maintain logs if a host is impacted, and create a baseline for "normal" performance to easily identify anomalies or changes. For more information, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.
- Enhanced Monitoring – To enable additional Amazon CloudWatch metrics for an Aurora MySQL database, turn on Enhanced Monitoring. When you create or modify an Aurora DB cluster, select **Enable Enhanced Monitoring**. This allows Aurora to publish performance metrics to CloudWatch. Some of the key metrics available include CPU usage, database connections, storage usage, and query latency. These can help identify performance bottlenecks.

  The amount of information transferred for a DB instance is directly proportional to the defined granularity for Enhanced Monitoring. A smaller monitoring interval results in more frequent reporting of OS metrics and increases your monitoring cost. To manage costs, set different granularities for different instances in your Amazon Web Services accounts. The default

granularity at creation of an instance is 60 seconds. For more information, see Cost of Enhanced Monitoring.

- Performance Insights – You can view all of the database call metrics. This includes DB locks, waits, and the number of rows processed, all of which you can use for troubleshooting. When you create or modify an Aurora DB cluster, select **Turn on Performance Insights**. By default, Performance Insights has a 7-day data retention period, but can be customized to analyze longer-term performance trends. For longer than 7-day retention, you need to upgrade to the paid tier. For more information, see Performance Insights pricing. You can set the data retention period for each Aurora DB instance separately. For more information, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

Most common reasons for Aurora MySQL database performance issues

You can use the following steps to troubleshoot performance issues in your Aurora MySQL database. We list these steps in the logical order of investigation, but they're not intended to be linear. One discovery could jump across steps, which allow for a series of investigative paths.

1. Workload – Understand your database workload.
2. Logging – Review all of the database logs.
3. Database connections – Make sure that the connections between your applications and your database are reliable.
4. Query performance – Examine your query execution plans to see if they've changed. Code changes can cause plans to change.

Troubleshooting workload issues for Aurora MySQL databases

Database workload can be viewed as reads and writes. With an understanding of "normal" database workload, you can tune queries and the database server to meet demand as it changes. There are a number of different reasons why performance can change, so the first step is to understand what has changed.

- Has there been a major or minor version upgrade?

  A major version upgrade includes changes to the engine code, particularly in the optimizer, that can change the query execution plan. When upgrading database versions, especially major versions, it's very important that you analyze the database workload and tune accordingly. Tuning can involve optimizing and rewriting queries, or adding and updating parameter settings, depending on the results of testing. Understanding what is causing the impact will allow you to start focusing on that specific area.

  For more information, see What is new in MySQL 8.0 and Server and status variables and options added, deprecated, or removed in MySQL 8.0 in the MySQL documentation, and Comparing Aurora MySQL version 2 and Aurora MySQL version 3.
- Has there been an increase in data being processed (row counts)?
- Are there more queries running concurrently?
- Are there schema or database changes?
- Have there been code defects or fixes?

Contents

- Instance host metrics
  - CPU usage
  - Memory usage
  - Network throughput
- Database metrics
- Troubleshooting memory usage issues for Aurora MySQL databases
  - Example 1: Continuous high memory usage
  - Example 2: Transient memory spikes
  - Example 3: Freeable memory drops continuously and isn't reclaimed

- Troubleshooting out-of-memory issues for Aurora MySQL databases
  - OOM response actions
    - kill_connect version-specific behavior
  - Default values by version
  - Aurora Serverless v2
  - Monitoring
    - Error log
    - Amazon CloudWatch metrics
    - Global status variables
    - Performance Insights
    - Performance Schema

Instance host metrics

Monitor instance host metrics such as CPU, memory, and network activity to help understand whether there has been a workload change. There are two main concepts for understanding workload changes:

- Utilization – The usage of a device, such as CPU or disk. It can be time-based or capacity-based.
  - Time-based – The amount of time that a resource is busy over a particular observation period.
  - Capacity-based – The amount of throughput that a system or component can deliver, as a percentage of its capacity.
- Saturation – The degree to which more work is required of a resource than it can process. When capacity-based usage reaches 100%, the extra work can't be processed and must be queued.

CPU usage

You can use the following tools to identify CPU usage and saturation:

- CloudWatch provides the `CPUUtilization` metric. If this reaches 100%, then the instance is saturated. However, CloudWatch metrics are averaged over 1 minute, and lack granularity.

  For more information on CloudWatch metrics, see Instance-level metrics for Amazon Aurora.
- Enhanced Monitoring provides metrics returned by the operating system `top` command. It shows load averages and the following CPU states, with 1-second granularity:

- `Idle (%)` = Idle time
- `IRQ (%)` = Software interrupts
- `Nice (%)` = Nice time for processes with a niced priority.
- `Steal (%)` = Time spent serving other tenants (virtualization related)
- `System (%)` = System time
- `User (%)` = User time
- `Wait (%)` = I/O wait

For more information on Enhanced Monitoring metrics, see OS metrics for Aurora.

Memory usage

If the system is under memory pressure, and resource consumption is reaching saturation, you should be observing a high degree of page scanning, paging, swapping, and out-of-memory errors.

You can use the following tools to identify memory usage and saturation:

CloudWatch provides the `FreeableMemory` metric, that shows how much memory can be reclaimed by flushing some of the OS caches and the current free memory.

For more information on CloudWatch metrics, see Instance-level metrics for Amazon Aurora.

Enhanced Monitoring provides the following metrics that can help you identify memory usage issues:

- `Buffers (KB)` – The amount of memory used for buffering I/O requests before writing to the storage device, in kilobytes.
- `Cached (KB)` – The amount of memory used for caching file system–based I/O.
- `Free (KB)` – The amount of unassigned memory, in kilobytes.
- `Swap` – Cached, Free, and Total.

For example, if you see that your DB instance uses `Swap` memory, then the total amount of memory for your workload is larger than your instance currently has available. We recommend increasing the size of your DB instance or tuning your workload to use less memory.

For more information on Enhanced Monitoring metrics, see OS metrics for Aurora.

For more detailed information on using the Performance Schema and `sys` schema to determine which connections and components are using memory, see Troubleshooting memory usage issues for Aurora MySQL databases.

Network throughput

CloudWatch provides the following metrics for total network throughput, all averaged over 1 minute:

- `NetworkReceiveThroughput` – The amount of network throughput received from clients by each instance in the Aurora DB cluster.
- `NetworkTransmitThroughput` – The amount of network throughput sent to clients by each instance in the Aurora DB cluster.
- `NetworkThroughput` – The amount of network throughput both received from and transmitted to clients by each instance in the Aurora DB cluster.
- `StorageNetworkReceiveThroughput` – The amount of network throughput received from the Aurora storage subsystem by each instance in the DB cluster.
- `StorageNetworkTransmitThroughput` – The amount of network throughput sent to the Aurora storage subsystem by each instance in the Aurora DB cluster.
- `StorageNetworkThroughput` – The amount of network throughput received from and sent to the Aurora storage subsystem by each instance in the Aurora DB cluster.

For more information on CloudWatch metrics, see Instance-level metrics for Amazon Aurora.

Enhanced Monitoring provides the `network` received (**RX**) and transmitted (**TX**) graphs, with up to 1-second granularity.

For more information on Enhanced Monitoring metrics, see OS metrics for Aurora.

Database metrics

Examine the following CloudWatch metrics for workload changes:

- `BlockedTransactions` – The average number of transactions in the database that are blocked per second.
- `BufferCacheHitRatio` – The percentage of requests that are served by the buffer cache.
- `CommitThroughput` – The average number of commit operations per second.

- `DatabaseConnections` – The number of client network connections to the database instance.
- `Deadlocks` – The average number of deadlocks in the database per second.
- `DMLThroughput` – The average number of inserts, updates, and deletes per second.
- `ResultSetCacheHitRatio` – The percentage of requests that are served by the query cache.
- `RollbackSegmentHistoryListLength` – The undo logs that record committed transactions with delete-marked records.
- `RowLockTime` – The total time spent acquiring row locks for InnoDB tables.
- `SelectThroughput` – The average number of select queries per second.

For more information on CloudWatch metrics, see Instance-level metrics for Amazon Aurora.

Consider the following questions when examining the workload:

1. Were there recent changes in DB instance class, for example reducing the instance size from 8xlarge to 4xlarge, or changing from db.r5 to db.r6?
2. Can you create a clone and reproduce the issue, or is it happening only on that one instance?
3. Is there server resource exhaustion, high CPU or memory exhaustion? If yes, this could mean that additional hardware is required.
4. Are one or more queries taking longer?
5. Are the changes caused by an upgrade, especially a major version upgrade? If yes, then compare the pre- and post-upgrade metrics.
6. Are there changes in the number of reader DB instances?
7. Have you enabled general, audit, or binary logging? For more information, see Logging for Aurora MySQL databases.
8. Did you enable, disable, or change your use of binary log (binlog) replication?
9. Are there any long-running transactions holding large numbers of row locks? Examine the InnoDB history list length (HLL) for indications of long-running transactions.

   For more information, see The InnoDB history list length increased significantly and the blog post Why is my SELECT query running slowly on my Amazon Aurora MySQL DB cluster?.

   a. If a large HLL is caused by a write transaction, it means that `UNDO` logs are accumulating (not being cleaned regularly). In a large write transaction, this accumulation can grow quickly. In MySQL, `UNDO` is stored in the SYSTEM tablespace. The `SYSTEM` tablespace is not shrinkable. The `UNDO` log might cause the `SYSTEM` tablespace to grow to several GB, or even TB. After the

purge, release the allocated space by taking a logical backup (dump) of the data, then import the dump to a new DB instance.

b. If a large HLL is caused by a read transaction (long-running query), it can mean that the query is using a large amount of temporary space. Release the temporary space by rebooting. Examine Performance Insights DB metrics for any changes in the `Temp` section, such as `created_tmp_tables`. For more information, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

10. Can you split long-running transactions into smaller ones that modify fewer rows?

11. Are there any changes in blocked transactions or increases in deadlocks? Examine Performance Insights DB metrics for any changes in status variables in the `Locks` section, such as `innodb_row_lock_time`, `innodb_row_lock_waits`, and `innodb_dead_locks`. Use 1-minute or 5-minute intervals.

12. Are there increased wait events? Examine Performance Insights wait events and wait types using 1-minute or 5-minute intervals. Analyze the top wait events and see whether they are correlated to workload changes or database contention. For example, `buf_pool mutex` indicates buffer pool contention. For more information, see Tuning Aurora MySQL with wait events.

Troubleshooting memory usage issues for Aurora MySQL databases

While CloudWatch, Enhanced Monitoring, and Performance Insights provide a good overview of memory usage at the operating system level, such as how much memory the database process is using, they don't allow you to break down what connections or components within the engine might be causing this memory usage.

To troubleshoot this, you can use the Performance Schema and `sys` schema. In Aurora MySQL version 3, memory instrumentation is enabled by default when the Performance Schema is enabled. In Aurora MySQL version 2, only memory instrumentation for Performance Schema memory usage is enabled by default. For information on tables available in the Performance Schema to track memory usage and enabling Performance Schema memory instrumentation, see Memory summary tables in the MySQL documentation. For more information on using the Performance Schema with Performance Insights, see Overview of the Performance Schema for Database Insights in Aurora MySQL.

While detailed information is available in the Performance Schema to track current memory usage, the MySQL sys schema has views on top of Performance Schema tables that you can use to quickly pinpoint where memory is being used.

In the sys schema, the following views are available to track memory usage by connection, component, and query.

View	Description
memory_by_host_by_current_bytes	Provides information on engine memory usage by host. This can be useful for identifying which application servers or client hosts are consuming memory.
memory_by_thread_by_current_bytes	Provides information on engine memory usage by thread ID. The thread ID in MySQL can be a client connection or a background thread. You can map thread IDs to MySQL connection IDs by using the sys.processlist view or performance_schema.threads table.
memory_by_user_by_current_bytes	Provides information on engine memory usage by user. This can be useful for identifying which user accounts or clients are consuming memory.
memory_global_by_current_bytes	Provides information on engine memory usage by engine component. This can be useful for identifying memory usage globally by engine buffers or components. For example, you might see the `memory/innodb/buf_buf_pool` event for the InnoDB buffer pool, or the `memory/sql/Prepared_statement::main_mem_root` event for prepared statements.
memory_global_total	Provides an overview of total tracked memory usage in the database engine.

In Aurora MySQL version 3.05 and higher, you can also track maximum memory usage by statement digest in the Performance Schema statement summary tables. The statement summary

tables contain normalized statement digests and aggregated statistics on their execution. The `MAX_TOTAL_MEMORY` column can help you identify maximum memory used by query digest since the statistics were last reset, or since the database instance was restarted. This can be useful in identifying specific queries that might be consuming a lot of memory.


> **Note**
>
> The Performance Schema and `sys` schema show you the current memory usage on the server, and the high-water marks for memory consumed per connection and engine component. Because the Performance Schema is maintained in memory, information is reset when the DB instance restarts. To maintain a history over time, we recommend that you configure retrieval and storage of this data outside of the Performance Schema.

Topics

- Example 1: Continuous high memory usage
- Example 2: Transient memory spikes
- Example 3: Freeable memory drops continuously and isn't reclaimed

Example 1: Continuous high memory usage

Looking globally at `FreeableMemory` in CloudWatch, we can see that memory usage greatly increased at 2024-03-26 02:59 UTC.

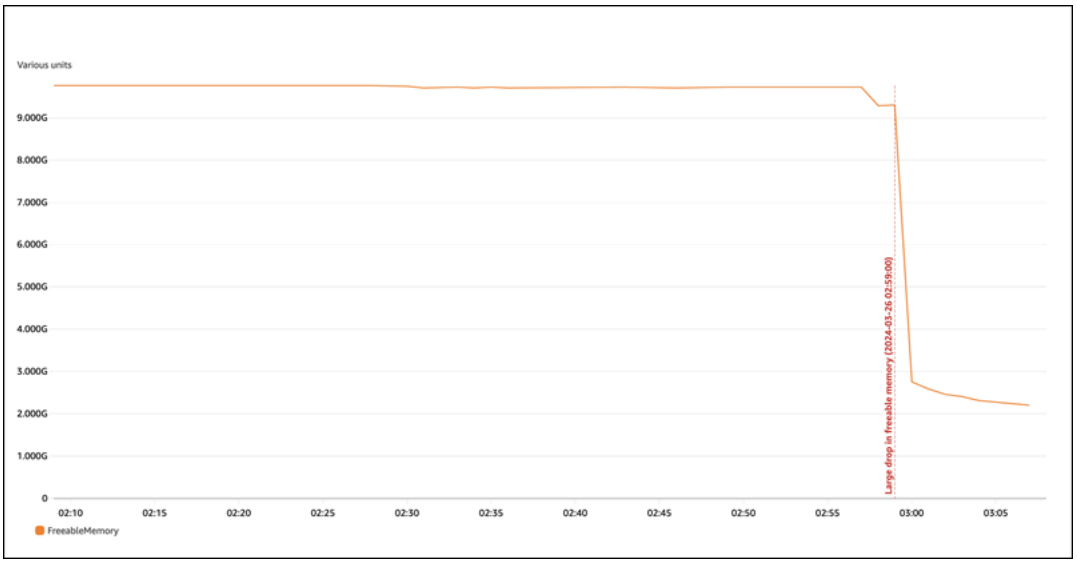

This doesn't tell us the whole picture. To determine which component is using the most memory, you can log into the database and look at `sys.memory_global_by_current_bytes`. This table contains a list of memory events that MySQL tracks, along with information on memory allocation per event. Each memory tracking event starts with `memory/%`, followed by other information on which engine component/feature the event is associated with.

For example, `memory/performance_schema/%` is for memory events related to the Performance Schema, `memory/innodb/%` is for InnoDB, and so on. For more information on event naming conventions, see Performance Schema instrument naming conventions in the MySQL documentation.

From the following query, we can find the likely culprit based on `current_alloc`, but we can also see many `memory/performance_schema/%` events.

```
mysql> SELECT * FROM sys.memory_global_by_current_bytes LIMIT 10;

+-------------------------------------------------------------------------------
+---------------+---------------+-------------------+------------+------------
+-----------------+
| event_name                                                                    |
 current_count | current_alloc | current_avg_alloc | high_count | high_alloc |
 high_avg_alloc |
+-------------------------------------------------------------------------------
+---------------+---------------+-------------------+------------+------------
+-----------------+
| memory/sql/Prepared_statement::main_mem_root                                  |
 512817 | 4.91 GiB      | 10.04 KiB         |     512823 | 4.91 GiB   | 10.04 KiB
 |
| memory/performance_schema/prepared_statements_instances                       |
   252 | 488.25 MiB    | 1.94 MiB          |        252 | 488.25 MiB | 1.94 MiB       |
| memory/innodb/hash0hash                                                       |
     4 | 79.07 MiB     | 19.77 MiB         |          4 | 79.07 MiB  | 19.77 MiB      |
| memory/performance_schema/events_errors_summary_by_thread_by_error            |
  1028 | 52.27 MiB     | 52.06 KiB         |       1028 | 52.27 MiB  | 52.06 KiB      |
| memory/performance_schema/events_statements_summary_by_thread_by_event_name |
     4 | 47.25 MiB     | 11.81 MiB         |          4 | 47.25 MiB  | 11.81 MiB      |
| memory/performance_schema/events_statements_summary_by_digest                |
     1 | 40.28 MiB     | 40.28 MiB         |          1 | 40.28 MiB  | 40.28 MiB      |
| memory/performance_schema/memory_summary_by_thread_by_event_name              |
     4 | 31.64 MiB     | 7.91 MiB          |          4 | 31.64 MiB  | 7.91 MiB       |
| memory/innodb/memory                                                          |
 15227 | 27.44 MiB     | 1.85 KiB          |      20619 | 33.33 MiB  | 1.66 KiB       |
```

```
| memory/sql/String::value                                                    |
 74411 | 21.85 MiB     |  307 bytes        |      76867 | 25.54 MiB  |  348 bytes     |
| memory/sql/TABLE                                                            |
  8381 | 21.03 MiB     | 2.57 KiB          |       8381 | 21.03 MiB  | 2.57 KiB       |
+-----------------------------------------------------------------------------
+---------------+---------------+-------------------+------------+------------
+----------------+
10 rows in set (0.02 sec)
```

We mentioned previously that the Performance Schema is stored in memory, which means that it's also tracked in the `performance_schema` memory instrumentation.

> **Note**
>
> If you find that the Performance Schema is using a lot of memory, and want to limit its memory usage, you can tune database parameters based on your requirements. For more information, see The Performance Schema memory-allocation model in the MySQL documentation.

For readability, you can rerun the same query but exclude Performance Schema events. The output shows the following:

- The main memory consumer is `memory/sql/Prepared_statement::main_mem_root`.
- The `current_alloc` column tells us that MySQL has 4.91 GiB currently allocated to this event.
- The `high_alloc` column tells us that 4.91 GiB is the high-water mark of `current_alloc` since the stats were last reset or since the server restarted. This means that `memory/sql/Prepared_statement::main_mem_root` is at its highest value.

```
mysql> SELECT * FROM sys.memory_global_by_current_bytes WHERE event_name NOT LIKE
 'memory/performance_schema/%' LIMIT 10;

+-----------------------------------------------+---------------+--------------
+------------------+-----------+-----------+----------------+
| event_name                                    | current_count | current_alloc |
 current_avg_alloc | high_count | high_alloc | high_avg_alloc |
+-----------------------------------------------+---------------+--------------
+------------------+-----------+-----------+----------------+
```

```
| memory/sql/Prepared_statement::main_mem_root  |        512817 | 4.91 GiB      | 10.04
 KiB         |     512823 | 4.91 GiB   | 10.04 KiB      |
| memory/innodb/hash0hash                       |             4 | 79.07 MiB     | 19.77
 MiB         |          4 | 79.07 MiB  | 19.77 MiB      |
| memory/innodb/memory                          |         17096 | 31.68 MiB     | 1.90
 KiB         |      22498 | 37.60 MiB  | 1.71 KiB       |
| memory/sql/String::value                      |        122277 | 27.94 MiB     |  239
 bytes       |     124699 | 29.47 MiB  |  247 bytes     |
| memory/sql/TABLE                              |          9927 | 24.67 MiB     | 2.55
 KiB         |       9929 | 24.68 MiB  | 2.55 KiB       |
| memory/innodb/lock0lock                       |          8888 | 19.71 MiB     | 2.27
 KiB         |       8888 | 19.71 MiB  | 2.27 KiB       |
| memory/sql/Prepared_statement::infrastructure |        257623 | 16.24 MiB     |   66
 bytes       |     257631 | 16.24 MiB  |   66 bytes     |
| memory/mysys/KEY_CACHE                        |             3 | 16.00 MiB     | 5.33
 MiB         |          3 | 16.00 MiB  | 5.33 MiB       |
| memory/innodb/sync0arr                        |             3 | 7.03 MiB      | 2.34
 MiB         |          3 | 7.03 MiB   | 2.34 MiB       |
| memory/sql/THD::main_mem_root                 |           815 | 6.56 MiB      | 8.24
 KiB         |        849 | 7.19 MiB   | 8.67 KiB       |
+-----------------------------------------------+---------------+---------------
+------------------+-----------+-----------+----------------+
10 rows in set (0.06 sec)
```

From the name of the event, we can tell that this memory is being used for prepared statements. If you want to see which connections are using this memory, you can check memory_by_thread_by_current_bytes.

In the following example, each connection has approximately 7 MiB allocated, with a high-water mark of approximately 6.29 MiB (`current_max_alloc`). This makes sense, because the example is using `sysbench` with 80 tables and 800 connections with prepared statements. If you want to reduce memory usage in this scenario, you can optimize your application's usage of prepared statements to reduce memory consumption.

```
mysql> SELECT * FROM sys.memory_by_thread_by_current_bytes;

+----------+-----------------------------------------+-------------------
+------------------+------------------+------------------+-----------------+
| thread_id | user                                    | current_count_used |
 current_allocated | current_avg_alloc | current_max_alloc | total_allocated |
+----------+-----------------------------------------+-------------------
+------------------+------------------+------------------+-----------------+
```

```
|        46 | rdsadmin@localhost                          |                405 | 8.47 MiB
          | 21.42 KiB         | 8.00 MiB          | 155.86 MiB      |
|        61 | reinvent@10.0.4.4                           |               1749 | 6.72 MiB
          | 3.93 KiB          | 6.29 MiB          | 14.24 MiB       |
|       101 | reinvent@10.0.4.4                           |               1845 | 6.71 MiB
          | 3.72 KiB          | 6.29 MiB          | 14.50 MiB       |
|        55 | reinvent@10.0.4.4                           |               1674 | 6.68 MiB
          | 4.09 KiB          | 6.29 MiB          | 14.13 MiB       |
|        57 | reinvent@10.0.4.4                           |               1416 | 6.66 MiB
          | 4.82 KiB          | 6.29 MiB          | 13.52 MiB       |
|       112 | reinvent@10.0.4.4                           |               1759 | 6.66 MiB
          | 3.88 KiB          | 6.29 MiB          | 14.17 MiB       |
|        66 | reinvent@10.0.4.4                           |               1428 | 6.64 MiB
          | 4.76 KiB          | 6.29 MiB          | 13.47 MiB       |
|        75 | reinvent@10.0.4.4                           |               1389 | 6.62 MiB
          | 4.88 KiB          | 6.29 MiB          | 13.40 MiB       |
|       116 | reinvent@10.0.4.4                           |               1333 | 6.61 MiB
          | 5.08 KiB          | 6.29 MiB          | 13.21 MiB       |
|        90 | reinvent@10.0.4.4                           |               1448 | 6.59 MiB
          | 4.66 KiB          | 6.29 MiB          | 13.58 MiB       |
|        98 | reinvent@10.0.4.4                           |               1440 | 6.57 MiB
          | 4.67 KiB          | 6.29 MiB          | 13.52 MiB       |
|        94 | reinvent@10.0.4.4                           |               1433 | 6.57 MiB
          | 4.69 KiB          | 6.29 MiB          | 13.49 MiB       |
|        62 | reinvent@10.0.4.4                           |               1323 | 6.55 MiB
          | 5.07 KiB          | 6.29 MiB          | 13.48 MiB       |
|        87 | reinvent@10.0.4.4                           |               1323 | 6.55 MiB
          | 5.07 KiB          | 6.29 MiB          | 13.25 MiB       |
|        99 | reinvent@10.0.4.4                           |               1346 | 6.54 MiB
          | 4.98 KiB          | 6.29 MiB          | 13.24 MiB       |
|       105 | reinvent@10.0.4.4                           |               1347 | 6.54 MiB
          | 4.97 KiB          | 6.29 MiB          | 13.34 MiB       |
|        73 | reinvent@10.0.4.4                           |               1335 | 6.54 MiB
          | 5.02 KiB          | 6.29 MiB          | 13.23 MiB       |
|        54 | reinvent@10.0.4.4                           |               1510 | 6.53 MiB
          | 4.43 KiB          | 6.29 MiB          | 13.49 MiB       |
.
                                                                          .
.
                                                                          .
.
                                                                          .
|       812 | reinvent@10.0.4.4                           |               1259 | 6.38 MiB
          | 5.19 KiB          | 6.29 MiB          | 13.05 MiB       |
```

```
|       214 | reinvent@10.0.4.4                          |               1279 | 6.38 MiB
          | 5.10 KiB          | 6.29 MiB          | 12.90 MiB       |
|       325 | reinvent@10.0.4.4                          |               1254 | 6.38 MiB
          | 5.21 KiB          | 6.29 MiB          | 12.99 MiB       |
|       705 | reinvent@10.0.4.4                          |               1273 | 6.37 MiB
          | 5.13 KiB          | 6.29 MiB          | 13.03 MiB       |
|       530 | reinvent@10.0.4.4                          |               1268 | 6.37 MiB
          | 5.15 KiB          | 6.29 MiB          | 12.92 MiB       |
|       307 | reinvent@10.0.4.4                          |               1263 | 6.37 MiB
          | 5.17 KiB          | 6.29 MiB          | 12.87 MiB       |
|       738 | reinvent@10.0.4.4                          |               1260 | 6.37 MiB
          | 5.18 KiB          | 6.29 MiB          | 13.00 MiB       |
|       819 | reinvent@10.0.4.4                          |               1252 | 6.37 MiB
          | 5.21 KiB          | 6.29 MiB          | 13.01 MiB       |
|        31 | innodb/srv_purge_thread                    |              17810 | 3.14 MiB
          |  184 bytes        | 2.40 MiB          | 205.69 MiB      |
|        38 | rdsadmin@localhost                         |                599 | 1.76 MiB
          | 3.01 KiB          | 1.00 MiB          | 25.58 MiB       |
|         1 | sql/main                                   |               3756 | 1.32 MiB
          |  367 bytes        | 355.78 KiB        | 6.19 MiB        |
|       854 | rdsadmin@localhost                         |                 46 | 1.08 MiB
          | 23.98 KiB         | 1.00 MiB          | 5.10 MiB        |
|        30 | innodb/clone_gtid_thread                   |               1596 | 573.14
 KiB        |  367 bytes        | 254.91 KiB        | 970.69 KiB      |
|        40 | rdsadmin@localhost                         |                235 | 245.19
 KiB        | 1.04 KiB          | 128.88 KiB        | 808.64 KiB      |
|       853 | rdsadmin@localhost                         |                 96 | 94.63
 KiB         | 1009 bytes        | 29.73 KiB         | 422.45 KiB      |
|        36 | rdsadmin@localhost                         |                 33 | 36.29
 KiB         | 1.10 KiB          | 16.08 KiB         | 74.15 MiB       |
|        33 | sql/event_scheduler                        |                  3 | 16.27
 KiB         | 5.42 KiB          | 16.04 KiB         | 16.27 KiB       |
|        35 | sql/compress_gtid_table                    |                  8 | 14.20
 KiB         | 1.77 KiB          | 8.05 KiB          | 18.62 KiB       |
|        25 | innodb/fts_optimize_thread                 |                 12 | 1.86 KiB
          |  158 bytes        |  648 bytes        | 1.98 KiB        |
|        23 | innodb/srv_master_thread                   |                 11 | 1.23 KiB
          |  114 bytes        |  361 bytes        | 24.40 KiB       |
|        24 | innodb/dict_stats_thread                   |                 11 | 1.23 KiB
          |  114 bytes        |  361 bytes        | 1.35 KiB        |
|         5 | innodb/io_read_thread                      |                  1 |  144
 bytes        |  144 bytes        |  144 bytes        |  144 bytes      |
|         6 | innodb/io_read_thread                      |                  1 |  144
 bytes        |  144 bytes        |  144 bytes        |  144 bytes      |
```

```
|         2 | sql/aws_oscar_log_level_monitor           |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|         4 | innodb/io_ibuf_thread                     |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|         7 | innodb/io_write_thread                    |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|         8 | innodb/io_write_thread                    |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|         9 | innodb/io_write_thread                    |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|        10 | innodb/io_write_thread                    |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|        11 | innodb/srv_lra_thread                     |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|        12 | innodb/srv_akp_thread                     |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|        18 | innodb/srv_lock_timeout_thread            |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |  248 bytes      |
|        19 | innodb/srv_error_monitor_thread           |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|        20 | innodb/srv_monitor_thread                 |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|        21 | innodb/buf_resize_thread                  |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|        22 | innodb/btr_search_sys_toggle_thread       |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|        32 | innodb/dict_persist_metadata_table_thread |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
|        34 | sql/signal_handler                        |                  0 |    0
 bytes        |    0 bytes        |    0 bytes        |    0 bytes      |
+-----------+-------------------------------------------+--------------------
+------------------+------------------+------------------+-----------------+
831 rows in set (2.48 sec)
```

As mentioned earlier, the thread ID (`thd_id`) value here can refer to server background threads or database connections. If you want to map thread ID values to database connection IDs, you can use the `performance_schema.threads` table or the `sys.processlist` view, where `conn_id` is the connection ID.

```
mysql> SELECT thd_id,conn_id,user,db,command,state,time,last_wait FROM sys.processlist
 WHERE user='reinvent@10.0.4.4';
```

```
+--------+---------+-------------------+----------+---------+----------------+------
+-------------------------------------------------+
| thd_id | conn_id | user              | db       | command | state          | time |
 last_wait                                        |
+--------+---------+-------------------+----------+---------+----------------+------
+-------------------------------------------------+
|    590 |     562 | reinvent@10.0.4.4 | sysbench | Execute | closing tables |    0 |
 wait/io/redo_log_flush                           |
|    578 |     550 | reinvent@10.0.4.4 | sysbench | Sleep   | NULL           |    0 |
 idle                                             |
|    579 |     551 | reinvent@10.0.4.4 | sysbench | Execute | closing tables |    0 |
 wait/io/redo_log_flush                           |
|    580 |     552 | reinvent@10.0.4.4 | sysbench | Execute | updating       |    0 |
 wait/io/table/sql/handler                        |
|    581 |     553 | reinvent@10.0.4.4 | sysbench | Execute | updating       |    0 |
 wait/io/table/sql/handler                        |
|    582 |     554 | reinvent@10.0.4.4 | sysbench | Sleep   | NULL           |    0 |
 idle                                             |
|    583 |     555 | reinvent@10.0.4.4 | sysbench | Sleep   | NULL           |    0 |
 idle                                             |
|    584 |     556 | reinvent@10.0.4.4 | sysbench | Execute | updating       |    0 |
 wait/io/table/sql/handler                        |
|    585 |     557 | reinvent@10.0.4.4 | sysbench | Execute | closing tables |    0 |
 wait/io/redo_log_flush                           |
|    586 |     558 | reinvent@10.0.4.4 | sysbench | Execute | updating       |    0 |
 wait/io/table/sql/handler                        |
|    587 |     559 | reinvent@10.0.4.4 | sysbench | Execute | closing tables |    0 |
 wait/io/redo_log_flush                           |
.
                                                  .
.
                                                  .
.
                                                  .
|    323 |     295 | reinvent@10.0.4.4 | sysbench | Sleep   | NULL           |    0 |
 idle                                             |
|    324 |     296 | reinvent@10.0.4.4 | sysbench | Execute | updating       |    0 |
 wait/io/table/sql/handler                        |
|    325 |     297 | reinvent@10.0.4.4 | sysbench | Execute | closing tables |    0 |
 wait/io/redo_log_flush                           |
|    326 |     298 | reinvent@10.0.4.4 | sysbench | Execute | updating       |    0 |
 wait/io/table/sql/handler                        |
|    438 |     410 | reinvent@10.0.4.4 | sysbench | Execute | System lock    |    0 |
 wait/lock/table/sql/handler                      |
```

```
|    280 |     252 | reinvent@10.0.4.4 | sysbench | Sleep   | starting       |    0 |
 wait/io/socket/sql/client_connection            |
|     98 |      70 | reinvent@10.0.4.4 | sysbench | Query   | freeing items  |    0 |
 NULL                                            |
+--------+---------+-------------------+----------+---------+----------------+------
+-------------------------------------------------+
804 rows in set (5.51 sec)
```

Now we stop the `sysbench` workload, which closes the connections and released the memory. Checking the events again, we can confirm that memory is released, but `high_alloc` still tells us what the high-water mark is. The `high_alloc` column can be very useful in identifying short spikes in memory usage, where you might not be able to immediately identify usage from `current_alloc`, which shows only currently allocated memory.

```
mysql> SELECT * FROM sys.memory_global_by_current_bytes WHERE event_name='memory/sql/
Prepared_statement::main_mem_root' LIMIT 10;

+-----------------------------------------------+---------------+---------------
+------------------+-----------+-----------+----------------+
| event_name                                    | current_count | current_alloc |
 current_avg_alloc | high_count | high_alloc | high_avg_alloc |
+-----------------------------------------------+---------------+---------------
+------------------+-----------+-----------+----------------+
| memory/sql/Prepared_statement::main_mem_root |            17 | 253.80 KiB    | 14.93
 KiB         |     512823 | 4.91 GiB   | 10.04 KiB      |
+-----------------------------------------------+---------------+---------------
+------------------+-----------+-----------+----------------+
1 row in set (0.00 sec)
```

If you want to reset `high_alloc`, you can truncate the `performance_schema` memory summary tables, but this resets all memory instrumentation. For more information, see Performance Schema general table characteristics in the MySQL documentation.

In the following example, we can see that `high_alloc` is reset after truncation.

```
mysql> TRUNCATE `performance_schema`.`memory_summary_global_by_event_name`;
Query OK, 0 rows affected (0.00 sec)

mysql> SELECT * FROM sys.memory_global_by_current_bytes WHERE event_name='memory/sql/
Prepared_statement::main_mem_root' LIMIT 10;
```


```
+----------------------------------------------+---------------+--------------
+------------------+-----------+-----------+----------------+
| event_name                                   | current_count | current_alloc |
 current_avg_alloc | high_count | high_alloc | high_avg_alloc |
+----------------------------------------------+---------------+--------------
+------------------+-----------+-----------+----------------+
| memory/sql/Prepared_statement::main_mem_root |            17 | 253.80 KiB    | 14.93
 KiB         |         17 | 253.80 KiB | 14.93 KiB      |
+----------------------------------------------+---------------+--------------
+------------------+-----------+-----------+----------------+
1 row in set (0.00 sec)
```

Example 2: Transient memory spikes

Another common occurrence is short spikes in memory usage on a database server. These can be periodic drops in freeable memory that are difficult to troubleshoot using `current_alloc` in `sys.memory_global_by_current_bytes`, because the memory has already been freed.

> **Note**
>
> If Performance Schema statistics have been reset, or the database instance has been restarted, this information won't be available in `sys` or `performance_schema`. To retain this information, we recommend that you configure external metrics collection.

The following graph of the `os.memory.free` metric in Enhanced Monitoring shows brief 7-second spikes in memory usage. Enhanced Monitoring allows you to monitor at intervals as short as 1 second, which is perfect for catching transient spikes like these.

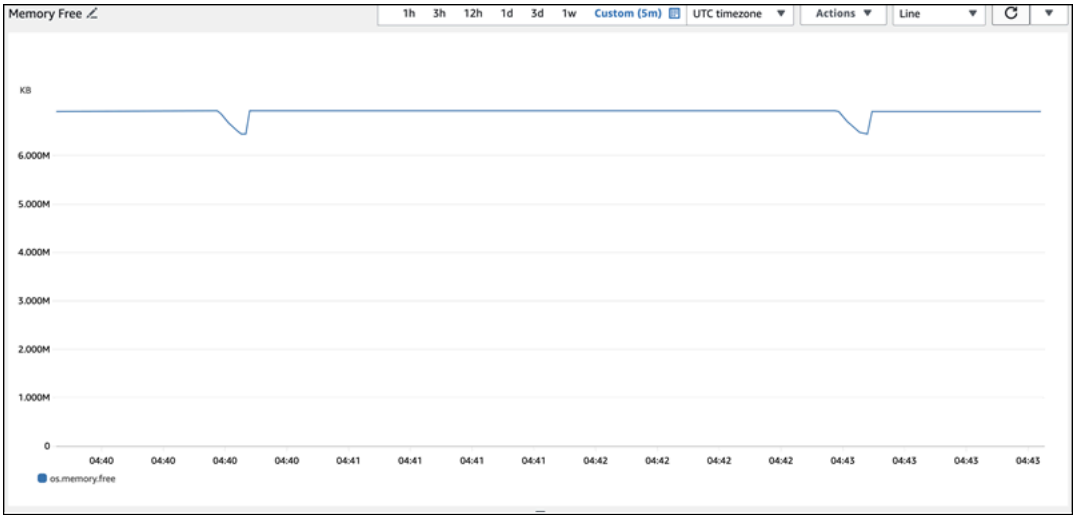

To help diagnose the cause of the memory usage here, we can use a combination of `high_alloc` in the `sys` memory summary views and Performance Schema statement summary tables to try to identify offending sessions and connections.

As expected, because memory usage isn't currently high, we can't see any major offenders in the `sys` schema view under `current_alloc`.

```
mysql> SELECT * FROM sys.memory_global_by_current_bytes LIMIT 10;

+-------------------------------------------------------------------------------
+---------------+---------------+------------------+------------+------------
+----------------+
| event_name                                                                    |
 current_count | current_alloc | current_avg_alloc | high_count | high_alloc |
 high_avg_alloc |
+-------------------------------------------------------------------------------
+---------------+---------------+------------------+------------+------------
+----------------+
| memory/innodb/hash0hash                                                       |
     4 | 79.07 MiB     | 19.77 MiB         |          4 | 79.07 MiB  | 19.77 MiB      |
| memory/innodb/os0event                                                        |
 439372 | 60.34 MiB     |  144 bytes        |     439372 | 60.34 MiB  |  144 bytes
 |
| memory/performance_schema/events_statements_summary_by_digest                |
     1 | 40.28 MiB     | 40.28 MiB         |          1 | 40.28 MiB  | 40.28 MiB      |
| memory/mysys/KEY_CACHE                                                        |
     3 | 16.00 MiB     | 5.33 MiB          |          3 | 16.00 MiB  | 5.33 MiB       |
| memory/performance_schema/events_statements_history_long                      |
     1 | 14.34 MiB     | 14.34 MiB         |          1 | 14.34 MiB  | 14.34 MiB      |
| memory/performance_schema/events_errors_summary_by_thread_by_error            |
   257 | 13.07 MiB     | 52.06 KiB         |        257 | 13.07 MiB  | 52.06 KiB      |
| memory/performance_schema/events_statements_summary_by_thread_by_event_name |
     1 | 11.81 MiB     | 11.81 MiB         |          1 | 11.81 MiB  | 11.81 MiB      |
| memory/performance_schema/events_statements_summary_by_digest.digest_text    |
     1 | 9.77 MiB      | 9.77 MiB          |          1 | 9.77 MiB   | 9.77 MiB       |
| memory/performance_schema/events_statements_history_long.digest_text         |
     1 | 9.77 MiB      | 9.77 MiB          |          1 | 9.77 MiB   | 9.77 MiB       |
| memory/performance_schema/events_statements_history_long.sql_text            |
     1 | 9.77 MiB      | 9.77 MiB          |          1 | 9.77 MiB   | 9.77 MiB       |
+-------------------------------------------------------------------------------
+---------------+---------------+------------------+------------+------------
+----------------+
10 rows in set (0.01 sec)
```

Expanding the view to order by `high_alloc`, we can now see that the `memory/temptable/physical_ram` component is a very good candidate here. At its highest, it consumed 515.00 MiB.

As its name suggests, `memory/temptable/physical_ram` instruments memory usage for the TEMP storage engine in MySQL, which was introduced in MySQL 8.0. For more information on how MySQL uses temporary tables, see Internal temporary table use in MySQL in the MySQL documentation.

> **Note**
>
> We're using the `sys.x$memory_global_by_current_bytes` view in this example.

```
mysql> SELECT event_name, format_bytes(current_alloc) AS "currently allocated",
 sys.format_bytes(high_alloc) AS "high-water mark"
FROM sys.x$memory_global_by_current_bytes ORDER BY high_alloc DESC LIMIT 10;

+-------------------------------------------------------------------------------
+--------------------+-----------------+
| event_name                                                                    |
 currently allocated | high-water mark |
+-------------------------------------------------------------------------------
+--------------------+-----------------+
| memory/temptable/physical_ram                                                 | 4.00
 MiB            | 515.00 MiB      |
| memory/innodb/hash0hash                                                       | 79.07
 MiB           | 79.07 MiB       |
| memory/innodb/os0event                                                        | 63.95
 MiB           | 63.95 MiB       |
| memory/performance_schema/events_statements_summary_by_digest                | 40.28
 MiB           | 40.28 MiB       |
| memory/mysys/KEY_CACHE                                                        | 16.00
 MiB           | 16.00 MiB       |
| memory/performance_schema/events_statements_history_long                      | 14.34
 MiB           | 14.34 MiB       |
| memory/performance_schema/events_errors_summary_by_thread_by_error           | 13.07
 MiB           | 13.07 MiB       |
| memory/performance_schema/events_statements_summary_by_thread_by_event_name | 11.81
 MiB           | 11.81 MiB       |
| memory/performance_schema/events_statements_summary_by_digest.digest_text    | 9.77
 MiB            | 9.77 MiB        |
```

```
| memory/performance_schema/events_statements_history_long.sql_text           | 9.77
 MiB            | 9.77 MiB        |
+-------------------------------------------------------------------------------
+--------------------+----------------+
10 rows in set (0.00 sec)
```

In Example 1: Continuous high memory usage, we checked the current memory usage for each connection to determine which connection is responsible for using the memory in question. In this example, the memory is already freed, so checking the memory usage for current connections isn't useful.

To dig deeper and find the offending statements, users, and hosts, we use the Performance Schema. The Performance Schema contains multiple statement summary tables that are sliced by different dimensions such as event name, statement digest, host, thread, and user. Each view will allow you dig deeper into where certain statements are being run and what they are doing. This section is focused on `MAX_TOTAL_MEMORY`, but you can find more information on all of the columns available in the Performance Schema statement summary tables documentation.

```
mysql> SHOW TABLES IN performance_schema LIKE 'events_statements_summary_%';

+-----------------------------------------------------------+
| Tables_in_performance_schema (events_statements_summary_%) |
+-----------------------------------------------------------+
| events_statements_summary_by_account_by_event_name         |
| events_statements_summary_by_digest                        |
| events_statements_summary_by_host_by_event_name            |
| events_statements_summary_by_program                       |
| events_statements_summary_by_thread_by_event_name          |
| events_statements_summary_by_user_by_event_name            |
| events_statements_summary_global_by_event_name             |
+-----------------------------------------------------------+
7 rows in set (0.00 sec)
```

First we check `events_statements_summary_by_digest` to see `MAX_TOTAL_MEMORY`.

From this we can see the following:

- The query with digest `20676ce4a690592ff05debcffcbc26faeb76f22005e7628364d7a498769d0c4a` seems to be a good candidate for this memory usage. The `MAX_TOTAL_MEMORY` is 537450710, which

matches the high-water mark we saw for the `memory/temptable/physical_ram` event in `sys.x$memory_global_by_current_bytes`.

- It has been run four times (`COUNT_STAR`), first at 2024-03-26 04:08:34.943256, and last at 2024-03-26 04:43:06.998310.

```
mysql> SELECT SCHEMA_NAME,DIGEST,COUNT_STAR,MAX_TOTAL_MEMORY,FIRST_SEEN,LAST_SEEN
FROM performance_schema.events_statements_summary_by_digest ORDER BY MAX_TOTAL_MEMORY
 DESC LIMIT 5;

+-------------+------------------------------------------------------------------
+------------+-----------------+---------------------------
+----------------------------+
| SCHEMA_NAME | DIGEST                                                           |
 COUNT_STAR | MAX_TOTAL_MEMORY | FIRST_SEEN                | LAST_SEEN
  |
+-------------+------------------------------------------------------------------
+------------+-----------------+---------------------------
+----------------------------+
| sysbench    | 20676ce4a690592ff05debcffcbc26faeb76f22005e7628364d7a498769d0c4a |
     4 |        537450710 | 2024-03-26 04:08:34.943256 | 2024-03-26 04:43:06.998310 |
| NULL        | f158282ea0313fefd0a4778f6e9b92fc7d1e839af59ebd8c5eea35e12732c45d |
     4 |          3636413 | 2024-03-26 04:29:32.712348 | 2024-03-26 04:36:26.269329 |
| NULL        | 0046bc5f642c586b8a9afd6ce1ab70612dc5b1fd2408fa8677f370c1b0ca3213 |
     2 |          3459965 | 2024-03-26 04:31:37.674008 | 2024-03-26 04:32:09.410718 |
| NULL        | 8924f01bba3c55324701716c7b50071a60b9ceaf17108c71fd064c20c4ab14db |
     1 |          3290981 | 2024-03-26 04:31:49.751506 | 2024-03-26 04:31:49.751506 |
| NULL        | 90142bbcb50a744fcec03a1aa336b2169761597ea06d85c7f6ab03b5a4e1d841 |
     1 |          3131729 | 2024-03-26 04:15:09.719557 | 2024-03-26 04:15:09.719557 |
+-------------+------------------------------------------------------------------
+------------+-----------------+---------------------------
+----------------------------+
5 rows in set (0.00 sec)
```

Now that we know the offending digest, we can get more details such as the query text, the user who ran it, and where it was run. Based on the digest text returned, we can see that this is a common table expression (CTE) that creates four temporary tables and performs four table scans, which is very inefficient.

```
mysql> SELECT
 SCHEMA_NAME,DIGEST_TEXT,QUERY_SAMPLE_TEXT,MAX_TOTAL_MEMORY,SUM_ROWS_SENT,SUM_ROWS_EXAMINED,SUM
FROM performance_schema.events_statements_summary_by_digest
```

```
WHERE DIGEST='20676ce4a690592ff05debcffcbc26faeb76f22005e7628364d7a498769d0c4a'\G;

*************************** 1. row ***************************
           SCHEMA_NAME: sysbench
           DIGEST_TEXT: WITH RECURSIVE `cte` ( `n` ) AS ( SELECT ? FROM `sbtest1` UNION
 ALL SELECT `id` + ? FROM `sbtest1` ) SELECT * FROM `cte`
     QUERY_SAMPLE_TEXT: WITH RECURSIVE cte (n) AS (   SELECT 1  from sbtest1 UNION ALL
  SELECT id + 1 FROM sbtest1) SELECT * FROM cte
      MAX_TOTAL_MEMORY: 537450710
         SUM_ROWS_SENT: 80000000
     SUM_ROWS_EXAMINED: 80000000
SUM_CREATED_TMP_TABLES: 4
     SUM_NO_INDEX_USED: 4
1 row in set (0.01 sec)
```

For more information on the `events_statements_summary_by_digest` table and other Performance Schema statement summary tables, see Statement summary tables in the MySQL documentation.

You can also run an EXPLAIN or EXPLAIN ANALYZE statement to see more details.

> **Note**
>
> EXPLAIN ANALYZE can provide more information than EXPLAIN, but it also runs the query, so be careful.

```
-- EXPLAIN
mysql> EXPLAIN WITH RECURSIVE cte (n) AS (SELECT 1  FROM sbtest1 UNION ALL SELECT id +
 1 FROM sbtest1) SELECT * FROM cte;

+----+-------------+------------+------------+-------+---------------+------+---------
+------+----------+----------+-------------+
| id | select_type | table      | partitions | type  | possible_keys | key  | key_len |
 ref  | rows     | filtered | Extra       |
+----+-------------+------------+------------+-------+---------------+------+---------
+------+----------+----------+-------------+
|  1 | PRIMARY     | <derived2> | NULL       | ALL   | NULL          | NULL | NULL    |
 NULL | 19221520 |   100.00 | NULL        |
|  2 | DERIVED     | sbtest1    | NULL       | index | NULL          | k_1  | 4       |
 NULL |  9610760 |   100.00 | Using index |
```

```
|  3 | UNION       | sbtest1    | NULL       | index | NULL          | k_1  | 4       |
 NULL |  9610760 |   100.00 | Using index |
+----+-------------+-----------+-----------+-------+--------------+------+---------
+------+---------+---------+------------+
3 rows in set, 1 warning (0.00 sec)

-- EXPLAIN format=tree
mysql> EXPLAIN format=tree WITH RECURSIVE cte (n) AS (SELECT 1 FROM sbtest1 UNION ALL
 SELECT id + 1 FROM sbtest1) SELECT * FROM cte\G;

*************************** 1. row ***************************
EXPLAIN: -> Table scan on cte  (cost=4.11e+6..4.35e+6 rows=19.2e+6)
    -> Materialize union CTE cte  (cost=4.11e+6..4.11e+6 rows=19.2e+6)
        -> Index scan on sbtest1 using k_1  (cost=1.09e+6 rows=9.61e+6)
        -> Index scan on sbtest1 using k_1  (cost=1.09e+6 rows=9.61e+6)
1 row in set (0.00 sec)

-- EXPLAIN ANALYZE
mysql> EXPLAIN ANALYZE WITH RECURSIVE cte (n) AS (SELECT 1 from sbtest1 UNION ALL
 SELECT id + 1 FROM sbtest1) SELECT * FROM cte\G;

*************************** 1. row ***************************
EXPLAIN: -> Table scan on cte  (cost=4.11e+6..4.35e+6 rows=19.2e+6) (actual
 time=6666..9201 rows=20e+6 loops=1)
    -> Materialize union CTE cte  (cost=4.11e+6..4.11e+6 rows=19.2e+6) (actual
 time=6666..6666 rows=20e+6 loops=1)
        -> Covering index scan on sbtest1 using k_1  (cost=1.09e+6 rows=9.61e+6)
 (actual time=0.0365..2006 rows=10e+6 loops=1)
        -> Covering index scan on sbtest1 using k_1  (cost=1.09e+6 rows=9.61e+6)
 (actual time=0.0311..2494 rows=10e+6 loops=1)
1 row in set (10.53 sec)
```

But who ran it? We can see in the Performance Schema that the `destructive_operator` user had `MAX_TOTAL_MEMORY` of 537450710, which again matches the previous results.

> **Note**
>
> The Performance Schema is stored in memory, so should not be relied upon as the sole source for auditing. If you need to maintain a history of statements run, and from which users, we recommend that you enable Aurora Advanced Auditing. If you also need to

maintain information on memory usage, we recommend that you configure monitoring to export and store these values.

```
mysql> SELECT USER,EVENT_NAME,COUNT_STAR,MAX_TOTAL_MEMORY FROM
 performance_schema.events_statements_summary_by_user_by_event_name
ORDER BY MAX_CONTROLLED_MEMORY DESC LIMIT 5;

+----------------------+---------------------------+------------+------------------+
| USER                 | EVENT_NAME                | COUNT_STAR | MAX_TOTAL_MEMORY |
+----------------------+---------------------------+------------+------------------+
| destructive_operator | statement/sql/select      |          4 |        537450710 |
| rdsadmin             | statement/sql/select      |       4172 |          3290981 |
| rdsadmin             | statement/sql/show_tables |          2 |          3615821 |
| rdsadmin             | statement/sql/show_fields |          2 |          3459965 |
| rdsadmin             | statement/sql/show_status |         75 |          1914976 |
+----------------------+---------------------------+------------+------------------+
5 rows in set (0.00 sec)

mysql> SELECT HOST,EVENT_NAME,COUNT_STAR,MAX_TOTAL_MEMORY FROM
 performance_schema.events_statements_summary_by_host_by_event_name
WHERE HOST != 'localhost' AND COUNT_STAR>0 ORDER BY MAX_CONTROLLED_MEMORY DESC LIMIT 5;

+------------+----------------------+------------+------------------+
| HOST       | EVENT_NAME           | COUNT_STAR | MAX_TOTAL_MEMORY |
+------------+----------------------+------------+------------------+
| 10.0.8.231 | statement/sql/select |          4 |        537450710 |
+------------+----------------------+------------+------------------+
1 row in set (0.00 sec)
```

Example 3: Freeable memory drops continuously and isn't reclaimed

The InnoDB database engine employs a range of specialized memory tracking events for different components. These specific events allow for granular tracking of memory usage in key InnoDB subsystems, for example:

- `memory/innodb/buf0buf` – Dedicated to monitoring memory allocations for the InnoDB buffer pool.
- `memory/innodb/ibuf0ibuf` – Specifically tracks memory changes related to the InnoDB change buffer.

To identify the top consumers of memory, we can query `sys.memory_global_by_current_bytes`:

```
mysql> SELECT event_name,current_alloc FROM sys.memory_global_by_current_bytes LIMIT
 10;

+-----------------------------------------------------------------+---------------+
| event_name                                                      | current_alloc |
+-----------------------------------------------------------------+---------------+
| memory/innodb/memory                                            | 5.28 GiB      |
| memory/performance_schema/table_io_waits_summary_by_index_usage | 495.00 MiB    |
| memory/performance_schema/table_shares                          | 488.00 MiB    |
| memory/sql/TABLE_SHARE::mem_root                                | 388.95 MiB    |
| memory/innodb/std                                               | 226.88 MiB    |
| memory/innodb/fil0fil                                           | 198.49 MiB    |
| memory/sql/binlog_io_cache                                      | 128.00 MiB    |
| memory/innodb/mem0mem                                           | 96.82 MiB     |
| memory/innodb/dict0dict                                         | 96.76 MiB     |
| memory/performance_schema/rwlock_instances                      | 88.00 MiB     |
+-----------------------------------------------------------------+---------------+
10 rows in set (0.00 sec)
```

The results show that `memory/innodb/memory` is the top consumer, using 5.28 GiB of currently allocated memory. This event serves as a category for memory allocations across various InnoDB components not associated with more specific wait events, such as `memory/innodb/buf0buf` mentioned previously.

Having established that InnoDB components are the primary consumers of memory, we can dive deeper into the specifics using the following MySQL command:

```
SHOW ENGINE INNODB STATUS \G;
```

The SHOW ENGINE INNODB STATUS command provides a comprehensive status report for the InnoDB storage engine, including detailed memory usage statistics for different InnoDB components. It can help identify which specific InnoDB structures or operations are consuming the most memory. For more information, see InnoDB in-memory structures in the MySQL documentation.

Analyzing the `BUFFER POOL AND MEMORY` section of the InnoDB status report, we see that 5,051,647,748 bytes (4.7 GiB) is allocated to the dictionary object cache, which accounts for 89% of the memory tracked by `memory/innodb/memory`.

```
----------------------
BUFFER POOL AND MEMORY
----------------------
Total large memory allocated 0
Dictionary memory allocated 5051647748
Buffer pool size 170512
Free buffers 142568
Database pages 27944
Old database pages 10354
Modified db pages 6
Pending reads 0
```

The dictionary object cache is a shared global cache that stores previously accessed data dictionary objects in memory to enable object reuse and improve performance. The high memory allocation to the dictionary object cache suggests a large number of database objects in the data dictionary cache.

Now that we know that the data dictionary cache is a primary consumer, we proceed to inspect the data dictionary cache for open tables. To find the number of tables in the table definition cache, query the global status variable open_table_definitions.

```
mysql> show global status like 'open_table_definitions';

+------------------------+-------+
| Variable_name          | Value |
+------------------------+-------+
| Open_table_definitions | 20000 |
+------------------------+-------+
1 row in set (0.00 sec)
```

For more information, see How MySQL opens and closes tables in the MySQL documentation.

You can limit the number of table definitions in the data dictionary cache by limiting the `table_definition_cache` parameter in the DB cluster or DB instance parameter group. For Aurora MySQL, this value serves as a soft limit for the number of tables in the table definition cache. The default value is dependent on the instance class and is set to the following:

```
LEAST({DBInstanceClassMemory/393040}, 20000)
```

When the number of tables exceeds the `table_definition_cache` limit, a least recently used (LRU) mechanism evicts and remove tables from the cache. However, tables involved in foreign key relationships aren't placed in the LRU list, preventing their removal.

In our current scenario, we run FLUSH TABLES to clear the table definition cache. This action results in a significant drop in the Open_table_definitions global status variable, from 20,000 to 12, as shown here:

```
mysql> show global status like 'open_table_definitions';

+------------------------+-------+
| Variable_name          | Value |
+------------------------+-------+
| Open_table_definitions | 12    |
+------------------------+-------+
1 row in set (0.00 sec)
```

Despite this reduction, we observe that the memory allocation for `memory/innodb/memory` remains high at 5.18 GiB, and the dictionary memory allocated also remains unchanged. This is evident from the following query results:

```
mysql> SELECT event_name,current_alloc FROM sys.memory_global_by_current_bytes LIMIT
 10;

+-----------------------------------------------------------------+---------------+
| event_name                                                      | current_alloc |
+-----------------------------------------------------------------+---------------+
| memory/innodb/memory                                            | 5.18 GiB      |
| memory/performance_schema/table_io_waits_summary_by_index_usage | 495.00 MiB    |
| memory/performance_schema/table_shares                          | 488.00 MiB    |
| memory/sql/TABLE_SHARE::mem_root                                | 388.95 MiB    |
| memory/innodb/std                                               | 226.88 MiB    |
| memory/innodb/fil0fil                                           | 198.49 MiB    |
| memory/sql/binlog_io_cache                                      | 128.00 MiB    |
| memory/innodb/mem0mem                                           | 96.82 MiB     |
| memory/innodb/dict0dict                                         | 96.76 MiB     |
| memory/performance_schema/rwlock_instances                      | 88.00 MiB     |
+-----------------------------------------------------------------+---------------+
10 rows in set (0.00 sec)
```

```
----------------------
```

```
BUFFER POOL AND MEMORY
----------------------
Total large memory allocated 0
Dictionary memory allocated 5001599639
Buffer pool size 170512
Free buffers 142568
Database pages 27944
Old database pages 10354
Modified db pages 6
Pending reads 0
```

This persistently high memory usage can be attributed to tables involved in foreign key relationships. These tables aren't placed in the LRU list for removal, explaining why the memory allocation remains high even after flushing the table definition cache.

To address this issue:

1. Review and optimize your database schema, particularly foreign key relationships.
2. Consider moving to a larger DB instance class that has more memory to accommodate your dictionary objects.

By following these steps and understanding the memory allocation patterns, you can better manage memory usage in your Aurora MySQL DB instance and prevent potential performance issues due to memory pressure.

Troubleshooting out-of-memory issues for Aurora MySQL databases

When an Aurora MySQL DB instance runs critically low on memory, the operating system can terminate the database process, causing an unplanned restart. To help prevent these restarts, Aurora MySQL includes memory management capabilities that monitor system memory and take automatic recovery actions when memory is low. These actions help prevent database unavailability due to memory exhaustion.

The following parameters control this behavior:

- `aurora_enable_memory_management` – Available only in Aurora MySQL 8.4.
  - When `ON` (default), Aurora automatically manages memory recovery actions and the `aurora_oom_response` parameter is ignored.
  - Set to `OFF` to manually control recovery actions through `aurora_oom_response`.

- `aurora_oom_response` – A comma-separated list of recovery actions. An empty string disables all actions. Available in Aurora MySQL version 3. Also available in Aurora MySQL 8.4 but only considered when `aurora_enable_memory_management` is set to `OFF`.

OOM response actions

The following actions can be included in `aurora_oom_response`, listed from least to most aggressive.

Action	What it does	Notes
`print`	Logs memory-intensive queries and connections to the error log. No queries or connections are terminated.	Available in Aurora MySQL versions 3 and 8.4.
`tune`	Shrinks internal table caches (`table_open_cache` , `table_definition_cache`) to free memory. Cache sizes are restored when memory returns to normal. Previously cached entries are not restored; new entries are only added as subsequent queries access them.	Available in Aurora MySQL versions 3 and 8.4. Provisioned instances only – not supported on Serverless v2.
`tune_buffer_pool`	Shrinks the InnoDB buffer pool to free memory. Buffer pool size is restored when memory returns to normal. Previously cached pages that were evicted are not reloaded automatically; new pages are cached only as subsequent queries access them.	Aurora MySQL version 3 (3.06 and higher) and Aurora MySQL 8.4 only. Supported on provisioned instances with 2 vCPUs only. Not supported on Serverless v2.
`decline`	Rejects new queries with an error while memory is low.	Available in Aurora MySQL versions 3 and 8.4.

Action	What it does	Notes
`kill_query`	Terminates running SELECT queries, starting with the highest memory consumers, until memory returns to normal. DDL, other DML, and transactions are not affected.	Available in Aurora MySQL versions 3 and 8.4. Mutually exclusive with `kill_connect` – if both are set, only `kill_connect` activates.
`kill_connect`	Terminates user connections, rolling back their active transactions and terminating DDL statements.	See version-specific behavior below.

Important

You must pair `tune_buffer_pool` with either `kill_query` or `kill_connect` in the `aurora_oom_response` parameter value. Without one of these, buffer pool resizing does not occur even when `tune_buffer_pool` is included.

kill_connect version-specific behavior

Aurora MySQL version	Behavior
Aurora MySQL 3.04 – Aurora MySQL 3.10	Terminates user connections to free enough memory for the database to recover from memory pressure.
Aurora MySQL 3.11+, Aurora MySQL 8.4	Terminates user connections to free enough memory for the database to recover from memory pressure. Also terminates any user connection that attempts to allocate memory during memory pressure.

On Serverless v2, Aurora responds to memory pressure by first scaling up ACUs to provide additional memory. If memory pressure persists while scaling is in progress, Aurora may terminate existing connections to recover memory. Termination of connections that try to allocate memory only occurs when the instance has reached its configured maximum ACU limit and can no longer scale further.

Default values by version

Aurora MySQL automatically configures `aurora_oom_response` based on engine version, instance type, and available memory.

In Aurora MySQL 8.4, when `aurora_enable_memory_management` is `ON` (the default), Aurora automatically manages memory recovery actions, and the `aurora_oom_response` value is not used. When set to `OFF`, Aurora uses the `aurora_oom_response` value directly, which is empty by default – meaning no recovery actions are taken unless you explicitly configure them. The following defaults table applies to Aurora MySQL version 3 only.

Small instance threshold: ≤2 GiB for versions 3.04 and 3.05. ≤4 GiB for version 3.06 and higher.

Large instance threshold: >2 GiB for versions 3.04 and 3.05. >4 GiB for version 3.06 and higher.

Version	Instance size	Provisioned	Serverless v2
Aurora MySQL 3.04–Aurora MySQL 3.05	Small	`print,tune`	`print`
	Large	*disabled*	*disabled*
Aurora MySQL 3.06	Small	`print,tune,decline,kill_connect`	`print`
	Large	*disabled*	*disabled*
Aurora MySQL 3.07	Small	`print,tune,decline,kill_connect`	`print`
	Large	`print`	`print`
Aurora MySQL 3.08	Small	`print,tune,tune_buffer_pool,decline,kill_connect`	`print`
	Large	`print`	`print`

Version	Instance size	Provisioned	Serverless v2
Aurora MySQL 3.09–Aurora MySQL 3.10	Small	`print,tune,tune_buffer_pool,decline,kill_connect`	`print`
	Large	`print,decline,kill_connect`	`print,decline,kill_connect`
Aurora MySQL 3.11+	Small	`print,tune,tune_buffer_pool,decline,kill_connect`	`print,decline,kill_connect`
	Large	`print,decline,kill_connect`	`print,decline,kill_connect`

Aurora Serverless v2

The `tune` and `tune_buffer_pool` actions are not supported on Aurora Serverless v2. All other actions work the same as on provisioned instances.

Memory thresholds adjust dynamically as the instance scales its ACUs. The Serverless v2 column in the defaults table above shows the effective defaults for each version.

Monitoring

You can monitor OOM avoidance activity through the following methods.

Error log

When memory recovery actions are taken, Aurora MySQL writes messages to the database error log. The message prefix varies by version and may change in future releases:

- **Aurora MySQL version 3:** Messages are prefixed with `OOM crash avoidance:`.
- **Aurora MySQL version 8.4:** Messages are prefixed with `Aurora memory management:`.

These messages include:

- Memory pressure detected and recovered notifications with total and available memory
- Details of queries or connections terminated for memory recovery
- Candidate queries identified by the `print` action

To view the error log, see Aurora MySQL error logs.

Amazon CloudWatch metrics

The following CloudWatch metrics track OOM avoidance activity at the instance level.

Metric	Description	Available from	Unit
`AuroraMemoryHealthState`	Indicates the memory health state. `0` means healthy (no memory pressure), `5` means moderate memory pressure, `10` means critical memory pressure.	Aurora MySQL 3.06.1+, Aurora MySQL 8.4	Gauge
`AuroraMemoryNumDeclinedSqlTotal`	The incremental number of queries declined as part of OOM avoidance.	Aurora MySQL 3.06.1+, Aurora MySQL 8.4	Count
`AuroraMemoryNumKillConnTotal`	The incremental number of connections closed as part of OOM avoidance.	Aurora MySQL 3.06.1+, Aurora MySQL 8.4	Count
`AuroraMemoryNumKillQueryTotal`	The incremental number of queries terminated as part of OOM avoidance.	Aurora MySQL 3.06.1+, Aurora MySQL 8.4	Count

Metric	Description	Available from	Unit
AuroraMillisecondsSpentInOomRecovery	The amount of time since memory health dropped below the normal state.	Aurora MySQL 3.08.0+, Aurora MySQL 8.4	Milliseconds
AuroraNumOomRecoverySuccessful	The number of times memory health was restored to the normal state.	Aurora MySQL 3.08.0+, Aurora MySQL 8.4	Count
AuroraNumOomRecoveryTriggered	The number of times memory health dropped below the normal state.	Aurora MySQL 3.08.0+, Aurora MySQL 8.4	Count

The following general CloudWatch metrics are also useful for monitoring memory pressure:

Metric	Description	Unit
FreeableMemory	The amount of available memory. Reports the `MemAvailable` value from `/proc/meminfo`.	Bytes
SwapUsage	The amount of swap space used.	Bytes

For the full list of Aurora MySQL instance-level metrics, see Instance-level metrics for Amazon Aurora.

Global status variables

The following status variables provide information about OOM state. Available in Aurora MySQL version 3.06.0 and higher.

Variable	Description
`Aurora_oom_response`	The currently active OOM response actions for this DB instance.
`aurora_oom_avoidance_recovery_state`	Whether OOM recovery is `ACTIVE` or `INACTIVE`.
`aurora_oom_status`	Current memory health state of the database: healthy (no memory pressure), moderate memory pressure, or critical memory pressure. Available in version 3 only.

To query: `SHOW GLOBAL STATUS LIKE 'aurora_oom%';`

For the full list of Aurora MySQL global status variables, see Aurora MySQL global status variables.

Performance Insights

If Performance Insights is enabled, you can use OS-level memory metrics to monitor memory pressure and detect OOM events. The following metrics are available under the `os.memory` and `os.swap` counters:

Metric	Description
`os.memory.outOfMemoryKillCount`	The number of OOM kills over the last collection interval. A non-zero value indicates the operating system terminated a process due to memory exhaustion, which typically results in a database restart.
`os.memory.total`	The total amount of memory, in kilobytes.
`os.memory.free`	The amount of unassigned memory, in kilobytes.
`os.memory.active`	The amount of assigned memory, in kilobytes.

Metric	Description
os.memory.cached	The amount of memory used for caching file system I/O, in kilobytes.
os.memory.dirty	The amount of memory pages modified but not yet written to storage, in kilobytes.
os.memory.inactive	The amount of least-frequently used memory pages, in kilobytes.
os.memory.db.residentSetSize	The amount of memory used by the database process (excluding shared memory), in bytes.
os.memory.db.cache	The amount of memory used for page cache by the database process, in bytes.
os.memory.db.swap	The amount of swap memory used by the database process, in bytes.
os.swap.in	The amount of memory swapped in from disk, in kilobytes.
os.swap.out	The amount of memory swapped out to disk, in kilobytes.

You can monitor `os.memory.outOfMemoryKillCount` to detect when the OS killed the database process due to out of memory. For the full list of OS counters, see Operating system counters.

Performance Schema

If `performance_schema` is enabled, you can use memory summary tables to identify which components and connections are consuming the most memory. For more information, see Troubleshooting memory usage issues for Aurora MySQL databases.

Logging for Aurora MySQL databases

Aurora MySQL logs provide essential information about database activity and errors. By enabling these logs, you can identify and troubleshoot issues, understand database performance, and audit database activity. We recommend that you enable these logs for all of your Aurora MySQL DB instances to ensure optimal performance and availability of the databases. The following types of logging can be enabled. Each log contains specific information that can lead to uncovering impacts to database processing.

- Error – Aurora MySQL writes to the error log only on startup, shutdown, and when it encounters errors. A DB instance can go hours or days without new entries being written to the error log. If you see no recent entries, it's because the server didn't encounter an error that would result in a log entry. Error logging is enabled by default. For more information, see Aurora MySQL error logs.
- General – The general log provides detailed information about database activity, including all SQL statements executed by the database engine. For more information on enabling general logging and setting logging parameters, see Aurora MySQL slow query and general logs, and The general query log in the MySQL documentation.

  > **Note**
  >
  > General logs can grow to be very large and consume your storage. For more information, see Log rotation and retention for Aurora MySQL.

- Slow query – The slow query log consists of SQL statements that take more than long_query_time seconds to run and require at least min_examined_row_limit rows to be examined. You can use the slow query log to find queries that take a long time to run and are therefore candidates for optimization.

  The default value for `long_query_time` is 10 seconds. We recommend that you start with a high value to identify the slowest queries, then work your way down for fine tuning.

  You can also use related parameters, such as `log_slow_admin_statements` and `log_queries_not_using_indexes`. Compare `rows_examined` with `rows_returned`. If `rows_examined` is much greater than `rows_returned`, then those queries can potentially be blocking.

In Aurora MySQL version 3, you can enable `log_slow_extra` to obtain more details. For more information, see Slow query log contents in the MySQL documentation. You can also modify `long_query_time` at the session level for debugging query execution interactively, which is especially useful if `log_slow_extra` is enabled globally.

For more information on enabling slow query logging and setting logging parameters, see Aurora MySQL slow query and general logs, and The slow query log in the MySQL documentation.

- Audit – The audit log monitors and logs database activity. Audit logging for Aurora MySQL is called Advanced Auditing. To enable Advanced Auditing, you set certain DB cluster parameters. For more information, see Using Advanced Auditing with an Amazon Aurora MySQL DB cluster.
- Binary – The binary log (binlog) contains events that describe database changes, such as table creation operations and changes to table data. It also contains events for statements that potentially could have made changes (for example, a DELETE that matched no rows), unless row-based logging is used. The binary log also contains information about how long each statement took that updated data.

  Running a server with binary logging enabled makes performance slightly slower. However, the benefits of the binary log in enabling you to set up replication and for restore operations generally outweigh this minor performance decrease.

  > **Note**
  >
  > Aurora MySQL doesn't require binary logging for restore operations.

  For more information on enabling binary logging and setting the binlog format, see Configuring Aurora MySQL binary logging , and The binary log in the MySQL documentation.

You can publish the error, general, slow, query, and audit logs to Amazon CloudWatch Logs. For more information, see Publishing database logs to Amazon CloudWatch Logs.

Another useful tool for summarizing slow, general, and binary log files is pt-query-digest.

Troubleshooting connection issues for Aurora MySQL databases

Ensuring reliable connectivity between your applications and your RDS DB instance is crucial for the smooth operation of your workloads. However, connectivity issues can arise because of various factors, such as network configurations, authentication problems, or resource constraints. This guide aims to provide a comprehensive approach to troubleshooting connectivity issues with Aurora MySQL.

Contents

- Identifying database connectivity issues for Aurora MySQL
- Gathering data on connectivity issues for Aurora MySQL
- Monitoring database connections for Aurora MySQL
  - Additional monitoring for Aurora MySQL
- Connectivity error codes for Aurora MySQL
- Parameter tuning recommendations for Aurora MySQL
- Examples of troubleshooting database connection issues for Aurora MySQL
  - Example 1: Troubleshooting failed connection attempts
  - Example 2: Troubleshooting abnormal client disconnects
  - Example 3: Troubleshooting IAM failed connection attempts

Identifying database connectivity issues for Aurora MySQL

Identifying the specific category of the connectivity issue can help narrow down the potential causes and guide the troubleshooting process. Each category might require different approaches and techniques for diagnosis and resolution. Database connectivity issues can broadly be classified into the following categories.

Connection errors and exceptions

Connection errors and exceptions can occur for various reasons, such as incorrect connection strings, authentication failures, network disruptions, or database server issues. Causes can include misconfigured connection parameters, invalid credentials, network outages, or database server crashes or restarts. Misconfigured security groups, virtual private cloud (VPC) settings, network Access Control Lists (ACLs), and route tables associated with subnets can also lead to connection issues.

Connection limit reached

This issue arises when the number of concurrent connections to the database server exceeds the maximum allowed limit. Database servers typically have a configurable maximum connection limit defined by the parameter max_connections in the clusters and instance parameter groups. By imposing a connection limit, the database server ensures that it has sufficient resources (for example, memory, CPU, and file handles) to handle the existing connections efficiently and provide acceptable performance. Causes can include connection leaks in the application, inefficient connection pooling, or an unexpected surge in connection requests.

Connection timeouts

Connection timeouts occur when the client application is unable to establish a connection with the database server within a specified timeout period. Common causes include network issues, server overload, firewall rules, and misconfigured connection settings.

Idle connection timeouts

Idle connections that remain inactive for a prolonged period might be closed automatically by the database server to conserve resources. This timeout is typically configurable using the `wait_timeout` and `interactive_timeout parameters`, and should be adjusted based on the application's connection usage patterns. Causes can include application logic that leaves connections idle for extended periods, or improper connection management.

Intermittent disconnect of existing connections

This class of errors refers to a scenario where established connections between a client application and the database are unexpectedly terminated or disconnected at irregular intervals, despite being active and in use. These disconnections occur intermittently, meaning they happen at irregular intervals and not consistently. The causes can include the following:

- Database server issues such as restarts or failovers
- Improper application connection handling
- Load balancing and proxy issues
- Network instability
- Problems with third-party components or middleware involved in the connection path
- Query execution timeouts
- Resource constraints on the server or client side

Identifying the root cause through comprehensive monitoring, logging, and analysis is crucial, while implementing proper error handling, connection pooling, and retry mechanisms can help

mitigate the impact of these intermittent disconnections on the application's functionality and user experience.

Gathering data on connectivity issues for Aurora MySQL

Gathering comprehensive data related to the application, database, network, and infrastructure components is crucial for effectively troubleshooting connectivity issues between an application and an Aurora MySQL database. By collecting relevant logs, configurations, and diagnostic information, you gain valuable insights that can help identify the root cause of the connectivity problems and guide you towards an appropriate resolution.

Network logs and configurations, such as security group rules, VPC settings, and route tables, are essential for identifying potential network-related bottlenecks or misconfigurations that could be preventing the application from establishing a successful connection with the database. By analyzing these network components, you can make sure that the necessary ports are open, IP addresses are allowed, and routing configurations are set up correctly.

Timestamps

Record the exact timestamps when the connectivity issues occur. This can help identify patterns or correlate the issues with other events or activities.

DB engine logs

In addition to the general database logs, review the database engine logs (for example, the MySQL error log and slow query log) for any relevant information or errors that might be related to the intermittent connectivity issues. For more information, see Logging for Aurora MySQL databases.

Client application logs

Collect detailed logs from the client applications that connect to the database. Application logs provide visibility into the connection attempts, errors, and any relevant information from the application's perspective, which can reveal issues related to connection strings, authentication credentials, or application-level connection handling.

Database logs, on the other hand, offer insights into database-side errors, slow queries, or events that might be contributing to the connectivity issues. For more information, see Logging for Aurora MySQL databases.

Client environment variables

Check whether any environment variables or configuration settings on the client side might be affecting the database connection, such as proxy settings, SSL/TLS settings, or any other relevant variables.

Client library versions

Make sure that the client is using the latest versions of any database drivers, libraries, or frameworks used for database connectivity. Outdated versions can have known issues or compatibility problems.

Client network capture

Perform a network capture on the client side using a tool such as Wireshark or `tcpdump` during the times when connectivity issues occur. This can help identify any network-related issues or anomalies on the client side.

Client network topology

Understand the client's network topology, including any firewalls, load balancers, or other components such as RDS Proxy or Proxy SQL that are making connections to the database instead of the client directly making connections.

Client operating system settings

Check the client's operating system settings that might affect network connectivity, such as firewall rules, network adapter settings, and any other relevant settings.

Connection pooling configuration

If you're using a connection pooling mechanism in your application, review the configuration settings and monitor the pool metrics (for example, active connections, idle connections, and connection timeouts) to ensure that the pool is functioning correctly. Also review the pool settings, such as the maximum pool size, minimum pool size, and connection validation settings, to ensure that they are configured correctly.

Connection string

The connection string typically includes parameters such as the hostname or endpoint, port number, database name, and authentication credentials. Analyzing the connection string can help identify potential misconfigurations or incorrect settings that may be causing connectivity problems. For example, an incorrect hostname or port number can prevent the client from reaching the database instance, while invalid authentication credentials can lead to authentication failures and connection rejections. Additionally, the connection string can reveal

issues related to connection pooling, timeouts, or other connection-specific settings that could contribute to connectivity issues. Providing the complete connection string used by the client application can help pinpoint any misconfigurations on the client.

Database metrics

Monitor database metrics such as CPU usage, memory usage, and disk I/O during the times when connectivity issues occur. These can help identify whether the DB instance is experiencing resource contention or performance issues.

DB engine version

Note the Aurora MySQL DB engine version. Amazon regularly releases updates addressing known issues, security vulnerabilities, and introducing performance enhancements. Therefore, we highly recommend that you upgrade to the latest available versions, as these updates often include bug fixes and improvements specifically related to connectivity, performance, and stability. Providing the database version information, along with the other collected details, can assist Amazon Web Services Support in effectively diagnosing and resolving connectivity issues.

Network metrics

Collect network metrics such as latency, packet loss, and throughput during the times when connectivity issues occur. Tools such as `ping`, `traceroute`, and network monitoring tools can help gather this data.

Source and client details

Determine the IP addresses of the application servers, load balancers, or any other components that are initiating the database connections. This could be a single IP address or a range of IP addresses (CIDR notation). If the source is an Amazon EC2 instance, it also helps to review the instance type, Availability Zone, subnet ID , and security groups associated with the instance, and network interface details such as private IP address and public IP address.

By thoroughly analyzing the gathered data, you can identify misconfigurations, resource constraints, network disruptions, or other underlying issues that are causing the intermittent or persistent connectivity problems. This information allows you to take targeted actions, such as adjusting configurations, resolving network issues, or addressing application-level connection handling.

Monitoring database connections for Aurora MySQL

To monitor and troubleshoot connectivity issues, you can use the following metrics and features.

CloudWatch metrics

- `CPUUtilization` – High CPU usage on the DB instance can lead to slow query execution, which can result in connection timeouts or rejections.
- `DatabaseConnections` – Monitor the number of active connections to the DB instance. A high number of connections close to the configured maximum can indicate potential connectivity issues or connection pool exhaustion.
- `FreeableMemory` – Low available memory can cause performance issues and connectivity problems because of resource constraints.
- `NetworkReceiveThroughput` and `NetworkTransmitThroughput` – Unusual spikes or drops in network throughput can indicate connectivity issues or network bottlenecks.

Performance Insights metrics

To troubleshoot connectivity issues in Aurora MySQL using Performance Insights, analyze Database metrics such as the following:

- Aborted_clients
- Aborted_connects
- Connections
- max_connections
- Threads_connected
- Threads_created
- Threads_running

These metrics can help you to identify connection bottlenecks, detect network or authentication problems, optimize connection pooling, and ensure efficient thread management. For more information, see Detailed Database Metrics for Aurora MySQL.

Performance Insights features

- **Database Load** – Visualize the database load over time and correlate it with connectivity issues or performance degradation.
- **SQL Statistics** – Analyze SQL statistics to identify inefficient queries or database operations that might contribute to connectivity problems.
- **Top Queries** – Identify and analyze the most resource-intensive queries, which can help identify potential performance bottlenecks or long-running queries that may be causing connectivity issues.

By monitoring these metrics and leveraging Performance Insights, you can gain visibility into the database instance's performance, resource usage, and potential bottlenecks that might be causing connectivity issues. For example:

- High `DatabaseConnections` close to the maximum limit can indicate connection pool exhaustion or improper connection handling, leading to connectivity problems.
- High `CPUUtilization` or low `FreeableMemory` can indicate resource constraints, which may cause slow query execution and connection timeouts or rejections.
- Analyzing the **Top Queries** and **SQL Statistics** can help identify inefficient or resource-intensive queries that may be contributing to connectivity issues.

Additionally, monitoring CloudWatch Logs and setting up alarms can help you proactively identify and respond to connectivity problems before they escalate.

It's important to note that while these metrics and tools can provide valuable insights, they should be used in conjunction with other troubleshooting steps. By also reviewing network configurations, security group rules, and application-level connection handling, you can comprehensively diagnose and resolve connectivity issues with Aurora MySQL DB instances.

Additional monitoring for Aurora MySQL

CloudWatch metrics

- `AbortedClients` – Tracks the number of client connections that have not been closed properly.
- `AuroraSlowConnectionHandleCount` – Tracks the number of slow connection handle operations, indicating potential connectivity issues or performance bottlenecks.
- `AuroraSlowHandshakeCount` – Measures the number of slow handshake operations, which can also be an indicator of connectivity problems.
- `ConnectionAttempts` – Measures the number of connection attempts made to the Aurora MySQL DB instance.

Global status variables

`Aurora_external_connection_count` – Shows the number of database connections to the DB instance, excluding RDS service connections used for database health checks.

By monitoring these metrics and global status variables you can gain visibility into the connection patterns, errors, and potential bottlenecks that may be causing connectivity issues with your Amazon Aurora MySQL instance.

For example, a high number of `AbortedClients` or `AuroraSlowConnectionHandleCount` can indicate connectivity problems.

Additionally, setting up CloudWatch alarms and notifications can help you proactively identify and respond to connectivity issues before they escalate and impact your application's performance.

Connectivity error codes for Aurora MySQL

The following are some common connectivity errors for Aurora MySQL databases, along with their error codes and explanations.

Error Code 1040: Too many connections

This error occurs when the client tries to establish more connections than the maximum allowed by the database server. Possible causes include the following:

- Connection pooling misconfiguration – If using a connection pooling mechanism, ensure that the maximum pool size is not set too high, and that connections are being properly released back to the pool.
- Database instance configuration – Verify the maximum allowed connections setting for the database instance and adjust it if necessary by setting the `max_connections` parameter.
- High concurrency – If multiple clients or applications are connecting to the database simultaneously, the maximum allowed connections limit may be reached.

Error Code 1045: Access denied for user '...'@'...' (using password: YES/NO)

This error indicates an authentication failure when attempting to connect to the database. Possible causes include the following:

- Authentication plugin compatibility – Check whether the authentication plugin used by the client is compatible with the database server's authentication mechanism.
- Incorrect username or password – Verify that the correct username and password are being used in the connection string or authentication mechanism.
- User permissions – Make sure that the user has the necessary permissions to connect to the database instance from the specified host or network.

Error Code 1049: Unknown database '...'

This error indicates that the client is attempting to connect to a database that does not exist on the server. Possible causes include the following:

- Database not created – Make sure that the specified database has been created on the database server.
- Incorrect database name – Double-check the database name used in the connection string or query for accuracy.
- User permissions – Verify that the user has the necessary permissions to access the specified database.

Error Code 1153: Got a packet bigger than 'max_allowed_packet' bytes

This error occurs when the client attempts to send or receive data that exceeds the maximum packet size allowed by the database server. Possible causes include the following:

- Large queries or result sets – If executing queries that involve large amounts of data, the packet size limit may be exceeded.
- Misconfigured packet size settings – Check the `max_allowed_packet` setting on the database server and adjust it if necessary.
- Network configuration issues – Make sure that the network configuration (for example, MTU size) allows for the required packet sizes.

Error Code 1226: User '...' has exceeded the 'max_user_connections' resource (current value: ...)

This error indicates that the user has exceeded the maximum number of concurrent connections allowed by the database server. Possible causes include the following::

- Connection pooling misconfiguration – If using a connection pooling mechanism, ensure that the maximum pool size is not set too high for the user's connection limit.
- Database instance configuration – Verify the `max_user_connections` setting for the database instance and adjust it if necessary.
- High concurrency – If multiple clients or applications are connecting to the database simultaneously using the same user, the user-specific connection limit may be reached.

Error Code 2003: Can't connect to MySQL server on '...' (10061)

This error typically occurs when the client is unable to establish a TCP/IP connection with the database server. It can be caused by various issues, such as the following:

- Database instance status – Make sure that the database instance is in the `available` state, and not undergoing any maintenance or backup operations.

- Firewall rules – Check whether any firewalls (operating system, network, or security group) are blocking the connection on the specified port (usually 3306 for MySQL).
- Incorrect hostname or endpoint – Make sure that the hostname or endpoint used in the connection string is correct and matches the database instance.
- Network connectivity issues – Verify that the client machine can reach the database instance over the network. Check for any network outages, routing issues, or VPC or subnet misconfigurations.

Error Code 2005: Unknown MySQL server host '...' (11001)

This error occurs when the client is unable to resolve the hostname or endpoint of the database server to an IP address. Possible causes include the following:

- DNS resolution issues – Verify that the client machine can resolve the hostname correctly using DNS. Check the DNS settings, DNS cache, and try using the IP address instead of the hostname.
- Incorrect hostname or endpoint – Double-check the hostname or endpoint used in the connection string for accuracy.
- Network configuration issues – Make sure that the client's network configuration (for example, VPC, subnet, and route tables) allows DNS resolution and connectivity to the database instance.

Error Code 2026: SSL connection error

This error occurs when there is an issue with the SSL/TLS configuration or certificate validation during the connection attempt. Possible causes include the following:

- Certificate expiration – Check whether the SSL/TLS certificate used by the server has expired and needs to be renewed.
- Certificate validation issues – Verify that the client is able to validate the server's SSL/TLS certificate correctly, and that the certificate is trusted.
- Network configuration issues – Make sure that the network configuration allows for SSL/TLS connections and doesn't block or interfere with the SSL/TLS handshake process.
- SSL/TLS configuration mismatch – Make sure that the SSL/TLS settings (for example, cipher suites and protocol versions) on the client and server are compatible.

By understanding the detailed explanations and potential causes for each error code, you can better troubleshoot and resolve connectivity issues when working with Aurora MySQL databases.

Parameter tuning recommendations for Aurora MySQL

Maximum connections

Adjusting these parameters can help prevent connection issues caused by reaching the maximum allowed connections limit. Make sure that these values are set appropriately based on your application's concurrency requirements and resource constraints.

- `max_connections` – This parameter specifies the maximum number of concurrent connections allowed to the DB instance.
- `max_user_connections` – This parameter can be specified during user creation and modification, and sets the maximum number of concurrent connections allowed for a specific user account.

Network buffer size

Increasing these values can improve network performance, especially for workloads involving large data transfers or result sets. However, be cautious as larger buffer sizes can consume more memory.

- `net_buffer_length` – This parameter sets the initial size for client connection and result buffers, balancing memory usage with query performance.
- `max_allowed_packet` – This parameter specifies the maximum size of a single network packet that can be sent or received by the DB instance.

Network compression (client side)

Enabling network compression can reduce network bandwidth usage, but it can increase CPU overhead on both the client and server sides.

- `compress` – This parameter enables or disables network compression for client/server communication.
- `compress_protocol` – This parameter specifies the compression protocol to use for network communication.

Network performance tuning

Adjusting these timeouts can help manage idle connections and prevent resource exhaustion, but be cautious as low values can cause premature connection terminations.

- `interactive_timeout` – This parameter specifies the number of seconds the server waits for activity on an interactive connection before closing it.

- `wait_timeout` – This parameter determines the number of seconds the server waits for activity on a noninteractive connection before closing it.

Network timeout settings

Adjusting these timeouts can help address issues related to slow or unresponsive connections. But be careful not to set them too low, as it can cause premature connection failures.

- `net_read_timeout` – This parameter specifies the number of seconds to wait for more data from a connection before ending the read operation.
- `net_write_timeout` – This parameter determines the number of seconds to wait for a block to be written to a connection before ending the write operation.

Examples of troubleshooting database connection issues for Aurora MySQL

The following examples show how to identify and troubleshoot database connection issues for Aurora MySQL.

Example 1: Troubleshooting failed connection attempts

Connection attempts can fail for several reasons, including authentication failures, SSL/TLS handshake failures, `max_connections` limit reached, and resource constraints on the DB instance.

You can track the number of failed connections either from Performance Insights or by using the following command.

```
mysql> show global status like 'aborted_connects';
+------------------+-------+
| Variable_name    | Value |
+------------------+-------+
| Aborted_connects | 7     |
+------------------+-------+
1 row in set (0.00 sec)
```

If the number of `Aborted_connects` increases over time, then the application could be having intermittent connectivity issues.

You can use Aurora Advanced Auditing to log the connects and disconnects from the client connections. You can do this by setting the following parameters in the DB cluster parameter group:

- `server_audit_logging` = `1`

- `server_audit_events` = `CONNECT`

The following is an extract from the audit logs for a failed login.

```
1728498527380921,auora-mysql-node1,user_1,172.31.49.222,147189,0,FAILED_CONNECT,,,1045
1728498527380940,auora-mysql-node1,user_1,172.31.49.222,147189,0,DISCONNECT,,,0
```

Where:

- `1728498527380921` – The epoch timestamp of when the failed login occurred
- `aurora-mysql-node1` – The instance identifier of the node of the Aurora MySQL cluster on which the connection failed
- `user_1` – The name of the database user for which the login failed
- `172.31.49.222` – The private IP address of the client from which the connection was established
- `147189` – The connection ID of the failed login
- `FAILED_CONNECT` – Indicates that the connection failed.
- `1045` – The return code. A nonzero value indicates an error. In this case, `1045` corresponds to access denied.

For more information, see Server error codes and Client error codes in the MySQL documentation.

You can also examine the Aurora MySQL error logs for any related error messages, for example:

```
2024-10-09T19:26:59.310443Z 220 [Note] [MY-010926] [Server] Access denied for user
 'user_1'@'172.31.49.222' (using password: YES) (sql_authentication.cc:1502)
```

Example 2: Troubleshooting abnormal client disconnects

You can track the number of abnormal client disconnects either from Performance Insights or by using the following command.

```
mysql> show global status like 'aborted_clients';
+-----------------+-------+
| Variable_name   | Value |
+-----------------+-------+
| Aborted_clients | 9     |
```

```
+-----------------+-------+
1 row in set (0.01 sec)
```

If the number of `Aborted_clients` increases over time, then the application isn't closing the connections to the database correctly. If connections aren't closed properly, it can lead to resource leaks and potential performance issues. Leaving connections open unnecessarily can consume system resources, such as memory and file descriptors, which can eventually cause the application or server to become unresponsive or restart.

You can use the following query to identify accounts that aren't closing connections properly. It retrieves the user account name, the host from which the user is connecting, the number of connections not closed, and the percentage of connections not closed.

```
SELECT
    ess.user,
    ess.host,
    (a.total_connections - a.current_connections) - ess.count_star AS not_closed,
    (((a.total_connections - a.current_connections) - ess.count_star) * 100) /
 (a.total_connections - a.current_connections) AS pct_not_closed
FROM
    performance_schema.events_statements_summary_by_account_by_event_name AS ess
    JOIN performance_schema.accounts AS a ON (ess.user = a.user AND ess.host = a.host)
WHERE
    ess.event_name = 'statement/com/quit'
    AND (a.total_connections - a.current_connections) > ess.count_star;

+----------+---------------+------------+----------------+
| user     | host          | not_closed | pct_not_closed |
+----------+---------------+------------+----------------+
| user1    | 172.31.49.222 |          1 |        33.3333 |
| user1    | 172.31.93.250 |       1024 |        12.1021 |
| user2    | 172.31.93.250 |         10 |        12.8551 |
+----------+---------------+------------+----------------+
3 rows in set (0.00 sec)
```

After you identify the user accounts and hosts from which the connections aren't closed, you can proceed to check the code that isn't closing the connections gracefully.

For example, with the MySQL connector in Python, use the `close()` method of the connection object to close connections. Here's an example function that establishes a connection to a database, performs a query, and closes the connection:

```
import mysql.connector

def execute_query(query):
    # Establish a connection to the database
    connection = mysql.connector.connect(
        host="your_host",
        user="your_username",
        password="your_password",
        database="your_database"
    )

    try:
        # Create a cursor object
        cursor = connection.cursor()

        # Execute the query
        cursor.execute(query)

        # Fetch and process the results
        results = cursor.fetchall()
        for row in results:
            print(row)

    finally:
        # Close the cursor and connection
        cursor.close()
        connection.close()
```

In this example, the `connection.close()` method is called in the `finally` block to make sure that the connection is closed, whether or not an exception occurs.

Example 3: Troubleshooting IAM failed connection attempts

Connectivity with Amazon Identity and Access Management (IAM) users can fail for several reasons, such as:

- Incorrect IAM policy configuration
- Expired security credentials
- Network connectivity issues
- Database permission mismatches

To troubleshoot these authentication errors, enable the `iam-db-auth-error` log export feature in your Amazon Relational Database Service (RDS) or Aurora database. This will allow you to view detailed authentication error messages in CloudWatch Log group for your Amazon RDS or Amazon Aurora cluster.

Once enabled, you can review these logs to identify and resolve the specific cause of your IAM authentication failures.

For example:

```
2025-09-22T12:02:30,806 [ERROR] Failed to authorize the connection request for
 user 'user_1' due to an internal IAM DB Auth error. (Status Code: 500, Error Code:
 InternalError)
```

and

```
2025-09-22T12:02:51,954 [ERROR] Failed to authenticate the connection request for user
 'user_2' because the provided token is malformed or otherwise invalid. (Status Code:
 400, Error Code: InvalidToken)
```

For troubleshooting guidance, refer to the Aurora troubleshooting guide for IAM DB authentication.

Troubleshooting query performance for Aurora MySQL databases

MySQL provides query optimizer control through system variables that affect how query plans are evaluated, switchable optimizations, optimizer and index hints, and the optimizer cost model. These data points can be helpful not only while comparing different MySQL environments, but also to compare previous query execution plans with current execution plans, and to understand the overall execution of a MySQL query at any point.

Query performance depends on many factors, including the execution plan, table schema and size, statistics, resources, indexes, and parameter configuration. Query tuning requires identifying bottlenecks and optimizing the execution path.

- Find the execution plan for the query and check whether the query is using appropriate indexes. You can optimize your query by using `EXPLAIN` and reviewing the details of each plan.
- Aurora MySQL version 3 (compatible with MySQL 8.0 Community Edition) uses an `EXPLAIN ANALYZE` statement. The `EXPLAIN ANALYZE` statement is a profiling tool that shows where MySQL spends time on your query and why. With `EXPLAIN ANALYZE`, Aurora MySQL plans, prepares, and runs the query while counting rows and measuring the time spent at various points of the execution plan. When the query completes, `EXPLAIN ANALYZE` prints the plan and its measurements instead of the query result.
- Keep your schema statistics updated by using the `ANALYZE` statement. The query optimizer can sometimes choose poor execution plans because of outdated statistics. This can lead to poor performance of a query because of inaccurate cardinality estimates of both tables and indexes. The `last_update` column of the innodb_table_stats table shows the last time your schema statistics were updated, which is a good indicator of "staleness."
- Other issues can occur, such as distribution skew of data, that aren't taken into account for table cardinality. For more information, see Estimating ANALYZE TABLE complexity for InnoDB tables and Histogram statistics in MySQL in the MySQL documentation.

Understanding the time spent by queries

The following are ways to determine the time spent by queries:

- Profiling
- Performance Schema
- Query optimizer

Profiling

By default, profiling is disabled. Enable profiling, then run the slow query and review its profile.

```
SET profiling = 1;
Run your query.
SHOW PROFILE;
```

1. Identify the stage where the most time is spent. According to General thread states in the MySQL documentation, reading and processing rows for a `SELECT` statement is often the longest-running state over the lifetime of a given query. You can use the `EXPLAIN` statement to understand how MySQL runs this query.
2. Review the slow query log to evaluate `rows_examined` and `rows_sent` to make sure that the workload is similar in each environment. For more information, see Logging for Aurora MySQL databases.
3. Run the following command for tables that are part of the identified query:

   ```
   SHOW TABLE STATUS\G;
   ```
4. Capture the following outputs before and after running the query on each environment:

   ```
   SHOW GLOBAL STATUS;
   ```
5. Run the following commands on each environment to see if there are any other query/session influencing the performance of this sample query.

   ```
   SHOW FULL PROCESSLIST;

   SHOW ENGINE INNODB STATUS\G;
   ```

   Sometimes, when resources on the server are busy, it impacts every other operation on the server, including queries. You can also capture information periodically when queries are run or set up a `cron` job to capture information at useful intervals.

Performance Schema

The Performance Schema provides useful information about server runtime performance, while having minimal impact on that performance. This is different from the `information_schema`, which provides schema information about the DB instance. For more information, see Overview of the Performance Schema for Database Insights in Aurora MySQL.

Query optimizer trace

To understand why a particular query plan was chosen for execution, you can set up `optimizer_trace` to access the MySQL query optimizer.

Run an optimizer trace to show extensive information on all the paths available to the optimizer and its choice.

```
SET SESSION OPTIMIZER_TRACE="enabled=on";
SET optimizer_trace_offset=-5, optimizer_trace_limit=5;

-- Run your query.
SELECT * FROM table WHERE x = 1 AND y = 'A';

-- After the query completes:
SELECT * FROM information_schema.OPTIMIZER_TRACE;
SET SESSION OPTIMIZER_TRACE="enabled=off";
```

Reviewing query optimizer settings

Aurora MySQL version 3 (compatible with MySQL 8.0 Community Edition) has many optimizer-related changes compared with Aurora MySQL version 2 (compatible with MySQL 5.7 Community Edition). If you have some custom values for the `optimizer_switch`, we recommend that you review the differences in the defaults and set `optimizer_switch` values that work best for your workload. We also recommend that you test the options available for Aurora MySQL version 3 to examine how your queries perform.

> **Note**
>
> Aurora MySQL version 3 uses the community default value of 20 for the innodb_stats_persistent_sample_pages parameter.

You can use the following command to show the `optimizer_switch` values:

```
SELECT @@optimizer_switch\G;
```

The following table shows the default `optimizer_switch` values for Aurora MySQL versions 2 and 3.

Setting	Aurora MySQL version 2	Aurora MySQL version 3
batched_key_access	off	off
block_nested_loop	on	on
condition_fanout_filter	on	on
derived_condition_pushdown	–	on
derived_merge	on	on
duplicateweedout	on	on
engine_condition_pushdown	on	on
firstmatch	on	on
hash_join	off	on
hash_join_cost_based	on	–
hypergraph_optimizer	–	off
index_condition_pushdown	on	on
index_merge	on	on
index_merge_intersection	on	on
index_merge_sort_union	on	on
index_merge_union	on	on
loosescan	on	on
materialization	on	on
mrr	on	on
mrr_cost_based	on	on

Setting	Aurora MySQL version 2	Aurora MySQL version 3
prefer_ordering_index	on	on
semijoin	on	on
skip_scan	–	on
subquery_materialization_cost_based	on	on
subquery_to_derived	–	off
use_index_extensions	on	on
use_invisible_indexes	–	off

For more information, see Switchable optimizations (MySQL 5.7) and Switchable optimizations (MySQL 8.0) in the MySQL documentation.

Troubleshooting binary log replication lag for Aurora MySQL

This section provides guidance on binary log replication lag for Aurora MySQL configured as a binary log replica. It covers replication architecture, parallel replication, dependency tracking, monitoring, and configuration best practices.

Binary log replication replicates data between MySQL-compatible databases. The binary log replication covered in this section is asynchronous: the source does not wait for replicas to confirm application of changes before committing transactions. This does not apply to semi-synchronous replication. In semi-synchronous replication, the source waits for at least one replica to acknowledge receipt of the transaction before committing. For example, Multi-AZ DB clusters for Amazon RDS for MySQL use semi-synchronous replication, which is out of scope for this section. The replica maintains a persistent connection to the source via the I/O thread to continuously stream binary log events. This section applies to all binlog replication topologies where Aurora MySQL is the replica. The source can be another Aurora MySQL cluster, Amazon RDS for MySQL, on-premises MySQL, or MySQL on Amazon EC2. This section also applies when Aurora MySQL is the source replicating to any MySQL-compatible target.

> **Note**
>
> For cross-region replication use cases, consider using Using Amazon Aurora Global Database as an alternative to binary log-based replication. Aurora Global Database uses dedicated infrastructure for replication, providing lower latency and requiring less operational management than binary log replication across regions.

Experiencing a lag spike right now? Skip the background material and start with Identifying the replication lag bottleneck to determine whether the I/O thread or the SQL thread is the bottleneck, then follow the link for that scenario: Troubleshooting I/O thread lag or Troubleshooting SQL thread lag.

Topics

- MySQL replication architecture
- Identifying the replication lag bottleneck
- Troubleshooting I/O thread lag
- Troubleshooting SQL thread lag
- Multi-threaded replication (MTR)

- Aurora-specific replication optimizations
- Monitoring parallel replication
- Best practices for minimizing replication lag

MySQL replication architecture

MySQL replication is implemented through specialized threads:

- **Binary log dump thread (source)** – Created when a replica connects. Sends binary log contents to the replica. Visible in `SHOW PROCESSLIST` as the "Binlog Dump" thread.
- **Replication I/O thread (replica)** – Connects to the source and requests binary log updates. Writes them to the replica's relay log. Always a single thread per replication channel regardless of multi-threaded replication (MTR) configuration.
- **Replication SQL thread (replica)** – Reads relay log and applies transactions. The applier always consists of one coordinator thread that reads transactions from the relay log, plus N worker threads that apply them, where N is the value of `replica_parallel_workers`. With `replica_parallel_workers=1`, the single worker applies transactions sequentially. With `replica_parallel_workers >= 2`, the coordinator assigns independent transactions to multiple worker threads for parallel apply.

> **Note**
>
> Setting `replica_parallel_workers=0` is deprecated as of MySQL 8.0.30 and is subject to removal in a future MySQL release. Use `replica_parallel_workers=1` for single-threaded apply instead.

The replication process works as follows:

1. The source executes DML, DCL, or DDL statements.
2. On commit, the source writes the data to the binary log.
3. The I/O thread on the replica fetches events and writes them to the relay log.
4. The SQL thread applies changes from the relay log (single-threaded or multi-threaded).

Identifying the replication lag bottleneck

Replication lag can occur in two areas: the I/O thread or the SQL thread. The first step is to determine which component is lagging.

> **Note**
>
> The `Seconds_Behind_Source` field in `SHOW REPLICA STATUS` measures the delay between when an event was logged on the source and when the SQL thread applies it. This metric does not indicate I/O thread lag specifically. To identify I/O thread lag, you must compare binary log positions as described in the following steps.

> **Note**
>
> Some MySQL commands and internal strings shown in this section, such as `SHOW MASTER STATUS`, use legacy terminology. This documentation uses the preferred terms "source" and "replica" throughout.

To determine which replication thread is lagging

1. On the replica, run `SHOW REPLICA STATUS` and compare `Source_Log_File` / `Read_Source_Log_Pos` (I/O thread position) with `File` / `Position` from `SHOW MASTER STATUS` on the source. If these differ significantly (>50 MB or >1 binlog file apart), the I/O thread is lagging.
2. Compare the I/O thread position with the SQL thread position (`Relay_Source_Log_File` / `Exec_Source_Log_Pos`). If the I/O thread is caught up but the SQL thread is behind (>50 MB apart), the SQL thread is the bottleneck.

> **Quick initial assessment using replica-only data**
>
> You can perform an initial assessment using only replica-side data. Run `SHOW REPLICA STATUS` twice, 1–2 minutes apart, and observe the following:
>
> - If `Read_Source_Log_Pos` is advancing but `Exec_Source_Log_Pos` is stalled or advancing much more slowly, the SQL thread is the bottleneck (Scenario B). Proceed to Troubleshooting SQL thread lag.

- If both `Read_Source_Log_Pos` and `Exec_Source_Log_Pos` are stalled while `Seconds_Behind_Source` is growing, the I/O thread is likely behind. Before making configuration changes, confirm by comparing the replica positions against the source using `SHOW MASTER STATUS` as described in step 1 of the preceding procedure.

Scenario	I/O thread vs Source	SQL thread vs I/O thread	Bottleneck
A	Far behind (>50 MB)	Close (<10 MB)	I/O thread
B	Close (<10 MB)	Far behind (>50 MB)	SQL thread
C	Far behind	Far behind	Both (start with I/O)

Example Interpreting binary log positions

The following example shows how to compare binary log positions to determine the bottleneck.

On the replica, `SHOW REPLICA STATUS` returns:

```
Source_Log_File:       mysql-bin.000045
Read_Source_Log_Pos:   524288000
Relay_Source_Log_File: mysql-bin.000045
Exec_Source_Log_Pos:   524200000
```

On the source, `SHOW MASTER STATUS` returns:

```
File:     mysql-bin.000045
Position: 1073741824
```

To determine the I/O thread lag, subtract the I/O thread position from the source position:

(1073741824 − 524288000) / 1048576 = **524 MB** – The I/O thread is far behind the source (Scenario A).

To determine the SQL thread lag, subtract the SQL thread position from the I/O thread position:

(524288000 − 524200000) / 1048576 = **0.08 MB** – The SQL thread is keeping up with the I/O thread.

In this case, focus troubleshooting on the I/O thread. For more information, see Troubleshooting I/O thread lag.

Anatomy of a replication lag spike

A common pattern is a sudden spike in `Seconds_Behind_Source` followed by a rapid return to near-zero. This occurs when a long-running DML on the source (such as an UPDATE scanning millions of rows but modifying only a few) takes minutes to execute. With ROW-based binary logging, only the modified rows are written to the binary log. When the SQL thread picks up this event, it calculates lag based on the transaction's start time on the source. This produces a large initial value. However, because only a few rows need to be applied, the replica catches up quickly. This is expected behavior and does not indicate a sustained replication problem.

Troubleshooting I/O thread lag

The I/O thread is responsible for fetching binary log events from the source and writing them to the relay log. Common causes and resolutions:

Cause	How to identify	Resolution
Network bandwidth limitations	Check CloudWatch `NetworkReceiveThroughput` / `NetworkTransmitThroughput`	Use instances with higher network capacity; ensure similar instance classes on source and replica
Network latency (cross-region or on-premises)	Geographic distance between source and replica; high round-trip time	For on-premises sources, use for dedicated, low-latency connectivity
Resource constraints on source	High CPU (`CPUUtilization`), memory	Scale up source instance. Each connected replica creates a binlog dump thread on the source – reduce

Cause	How to identify	Resolution
	pressure (`FreeableMemory`)	the number of connected replicas if the source is resource-constrained.
Large transactions with BLOB/TEXT data	Monitor binary log event sizes via `SumBinaryLogSize` CloudWatch metric	Set `binlog_row_image=noblob`; enable binary log transaction compression (`binlog_transaction_compression=ON`). Test in non-production first – compression increases CPU utilization on both source and replica.
Relay log space limit reached	`Replica_IO_State` shows "Waiting for the replica SQL thread to free enough relay log space"	This indicates the SQL thread is the root cause, not the I/O thread. Address SQL thread lag first. In Aurora MySQL, the default `relay_log_space_limit` is approximately 953 MiB. This message is part of normal operation when the SQL thread cannot apply changes fast enough. This message does not necessarily indicate an I/O thread performance issue.

Optimization strategies for I/O thread lag

1. **Use at least the same instance class as the source** – This approach provides sufficient CPU, memory, I/O capacity, and network bandwidth.
2. **Ensure sufficient network bandwidth** – Use instances with high network capacity. For on-premises sources, consider for dedicated bandwidth and a more consistent network experience.
3. **Check source-side resources, especially with many replicas** – Monitor the source's CPU, memory, network, and binlog I/O. Each connected replica adds a binlog dump thread on the source, so a source serving many replicas can itself become the bottleneck. We recommend confirming the source is not saturated before scaling up the replica. If the source is resource-constrained, consider reducing the number of connected replicas.

4. **Verify the Aurora binlog I/O cache is active** – The binlog I/O cache reduces disk I/O on the source for serving binary log events. It is enabled automatically in Aurora MySQL version 2.10 and higher – no configuration is required. If the source is an Aurora cluster, verify the cache is being used with `SHOW GLOBAL STATUS LIKE 'aurora_binlog_io_cache%'`. For more information, see Optimizing binlog replication.
5. **Enable binary log transaction compression** – Set `binlog_transaction_compression=ON` in the parameter group. Reduces bandwidth requirements. This setting has the following considerations:
   - Compression increases CPU utilization on both source and replica.
   - Test in a non-production environment first to find the optimal balance between compression and resource utilization.
   - Optionally, adjust the compression level using `binlog_transaction_compression_level_zstd` (default: 3, range: 1–22).
6. **Minimize writes to binary logs** – Set `binlog_row_image=noblob` to eliminate BLOB/TEXT data from binary logs. Do not use if the replica has triggers that reference BLOB columns. For more information, see binlog_row_image on the MySQL website.
7. **Implement replication filters on the source** – Use `binlog-do-db` or `binlog-ignore-db` to exclude unnecessary databases. These are static parameters requiring a reboot.

> **Important**
>
> Source-side filters affect what is written to binary logs entirely. Excluded databases are not replicated to any downstream replica. If the source is a self-managed MySQL instance (on-premises or on Amazon EC2), excluded databases are also not available for binary log-based point-in-time recovery. Amazon RDS for MySQL does not support source-side binlog filtering (`binlog-do-db`/`binlog-ignore-db` are not configurable); use replica-side replication filters instead. Aurora uses the cluster volume for PITR and is not affected by binary log filters for backup purposes.

Troubleshooting SQL thread lag

The SQL thread is the bottleneck when the I/O thread is caught up with the source but `Seconds_Behind_Source` is growing. To quantify the lag, monitor over a 15-minute window. Compare the binlog generation rate on the source (the `Position` delta from `SHOW MASTER STATUS`) with the SQL thread apply rate on the replica (the `Exec_Source_Log_Pos` delta).

Common causes and resolutions:

Cause	How to identify	Resolution
Single-threaded replication	`SELECT @@global.replica_parallel_workers;` returns 0 or 1	Enable multi-threaded replication (MTR) with WRITESET dependency tracking. MTR alone does not resolve lag if clock conflicts are high. See the section called "Dependency tracking on the source" for tuning dependency tracking and the section called "Error log multi-threaded replica statistics" for identifying clock conflicts.
Lack of primary keys	Without a primary key (or unique key with NOT NULL), the replica performs a full table scan for each modified row in UPDATE and DELETE operations. Use the following query to identify tables without primary keys: `SELECT t.table_schema, t.table_name FROM information_schema.tables t LEFT JOIN information_schema.table_constraints tc ON t.table_schema = tc.table_schema`	Add primary keys to all replicated tables. If adding explicit primary keys is not immediately feasible, consider enabling Generated Invisible Primary Keys (GIPK) by setting the `sql_generate_invisible_primary_key` parameter to `ON` (available in Aurora MySQL 3 versions based on MySQL 8.0.30 and later). For more information about Generated Invisible Primary Keys, see Generated Invisible Primary Keys on the MySQL website.

Cause	How to identify	Resolution

	<pre> AND t.table_name = tc.table_name
	    AND tc.constraint_type = 'PRIMARY KEY'
	WHERE tc.constraint_type IS NULL
	  AND t.table_type = 'BASE TABLE'
	  AND t.table_schema NOT IN ('information_schema', 'mysql', 'performance_schema', 'sys')
	ORDER BY 1;</pre>	

Cause	How to identify	Resolution
Large write transactions on source	A transaction that modifies many rows (for example, a bulk UPDATE or DELETE) replicate s as a single unit that only one worker thread can apply, regardless of MTR configuration. On the source, identify active long-running write transactions with: `SELECT trx_id, trx_started, trx_rows_modified, trx_query FROM informati on_schema.innodb_t rx WHERE trx_rows_ modified > 10000 ORDER BY trx_start ed;` On the replica, one worker stays busy on the same statement in `SHOW PROCESSLIST` while the others sit idle. Long-running idle transactions or transactions waiting on locks on the source do not by themselves cause replication lag – only the committed write volume matters, because events	Break bulk operations into smaller transactions (for example, a few thousand rows per commit) so the replica can apply them in parallel. For a worked example, see Example 4: A single large transaction cannot be parallelized.

Cause	How to identify	Resolution
	reach the binary log at commit time.	
DDL operations	DDL blocks other replication events	Use an online schema change tool, or use Blue/Green deployments. Schedule DDL during low-traffic periods. For `pt-online-schema-change`, see Percona Toolkit on the Percona website. For `gh-ost`, see gh-ost on the GitHub website.
Suboptimal parallel replication configuration	Low worker utilization; high clock conflicts in coordinator stats. Check the "Waited at clock conflicts" field in the multi-threaded replica statistics error log entry (see the section called "Error log multi-threaded replica statistics"). High values relative to "seconds elapsed" indicate transactions are frequently blocked by dependencies.	Tune dependency tracking (WRITESET) and worker count
Resource contention from analytical workloads	Complex OLAP queries competing with SQL thread for resources (CPU, memory)	Separate analytical workloads to dedicated replicas

Cause	How to identify	Resolution
Outdated table statistics	Suboptimal query plans on replica. Use the following query to identify tables with stale statistics (older than 7 days): `SELECT database_name, table_name, MIN(last_update) AS oldest_stat_update, DATEDIFF(NOW(), MIN(last_update)) AS stats_age_in_days FROM mysql.innodb_index_stats WHERE database_name NOT IN ('mysql', 'sys') GROUP BY database_name, table_name HAVING stats_age_in_days > 7 ORDER BY stats_age_in_days DESC;`	Run `ANALYZE TABLE` periodically on tables with stale statistics

Reduce apply workload with replica-side replication filters

Aurora MySQL version 3.01.0 and higher supports replica-side replication filters. Use these to skip irrelevant databases or tables during apply, reducing SQL thread workload. Replica-side filters are applied by the SQL thread – the I/O thread still fetches all binary log events from the source, so these filters reduce apply work only, not network transfer. Unlike source-side filters (which operate at the database level only), replica-side filters support table-level granularity using `replicate-`

`do-table` and `replicate-ignore-table`. For more information, see Configuring replication filters with Aurora MySQL.

Multi-threaded replication (MTR)

With MTR, the replica applies independent transactions in parallel. It cannot split a single large transaction into parallel parts. The degree of parallelism is limited by the dependency information written by the source.

When MTR is enabled (`replica_parallel_workers >= 2`), the SQL applier is split into a **coordinator thread** and multiple **worker threads**. The coordinator reads transactions from the relay log. It examines the logical timestamps (`last_committed` and `sequence_number`) that the source embeds in each transaction. It then assigns independent transactions to available worker threads for parallel execution. Two transactions are independent if they do not share data dependencies – that is, if they modify different rows. The source determines these dependencies at commit time using the configured dependency tracking method and records them in the binary log. The replica cannot increase parallelism beyond what the source permits.

MTR is the recommended default

We recommend running replicas with MTR enabled. MTR is enabled by default (`replica_parallel_workers=4`) in MySQL 8.0.27 and higher, including the Aurora MySQL 3 versions based on those releases. On earlier versions (Aurora MySQL 2.12.1 and higher, or versions based on MySQL releases before 8.0.27), enable it explicitly by setting `replica_parallel_workers` to a value of 2 or more. Keeping MTR enabled costs little when parallelism is unavailable and lets the replica take advantage of it whenever the workload allows.

MTR does not reduce lag in the following cases:

- The bottleneck is the I/O thread (network/bandwidth issue).
- Lag is caused by a single long-running transaction.
- The replica is CPU-saturated (more threads makes it worse).
- Tables lack primary keys (forces full table scans, negating parallelism).

Dependency tracking on the source

The source determines which transactions can be applied in parallel using the `binlog_transaction_dependency_tracking` parameter. Recommended value: `WRITESET`.

- **COMMIT_ORDER** – Tracks dependencies based on commit timing. Works best with high concurrency and large group commits. Limited parallelism in low-concurrency environments.
- **WRITESET (recommended)** – Tracks actual row-level data dependencies. Performance is always at least as good as COMMIT_ORDER. Significantly better with low-concurrency workloads. Requires tables to have primary keys.

  WRITESET dependency tracking produces empty or partial writesets (limiting parallelism) in the following cases:

  - Tables without primary or unique keys
  - DDL statements (CREATE TABLE, ALTER TABLE, and so on)
  - Transactions that modify parent tables in foreign key relationships

  Additionally, the dependency history is cleared when the binary log rotates or when the `binlog_transaction_dependency_history_size` limit is reached, temporarily reducing parallelism.
- **WRITESET_SESSION** – Same as WRITESET with an additional constraint that transactions from the same session cannot be parallelized.

> **Note**
>
> MySQL 8.4 has removed `binlog_transaction_dependency_tracking` and defaults to WRITESET (not configurable). Earlier versions default to COMMIT_ORDER.

Parallel type (`replica_parallel_type`)

The `replica_parallel_type` parameter determines how transactions are distributed among worker threads. There are two options:

- **LOGICAL_CLOCK (recommended)** – Uses logical timestamps to determine which transactions can be executed in parallel, even within the same database. This approach results in higher replication throughput and lower latency for most workloads. Use it unless you have a specific multi-database workload that does not benefit from it.
- **DATABASE** – Assigns transactions to worker threads based on the database they affect. Consider it only when your application uses multiple databases with clearly separated workloads and transactions rarely cross database boundaries. When using DATABASE, the

`binlog_transaction_dependency_tracking` setting on the source is not used – parallelism is determined solely by which database a transaction targets.

> **Note**
>
> In MySQL versions 8.0.26 and earlier, `replica_parallel_type` defaults to `DATABASE`. From MySQL 8.0.27 onwards, it defaults to `LOGICAL_CLOCK`. If you are using an older version, explicitly set this parameter to `LOGICAL_CLOCK` to take advantage of finer-grained dependency tracking.

MTR configuration

Source-side parameters

Parameter	Recommended value	Notes
`binlog_transaction_dependency_tracking`	WRITESET	Cluster parameter group. Dynamic. Not needed for MySQL 8.4.
`binlog_transaction_dependency_history_size`	25000 (default)	Cluster parameter group. Dynamic. Controls how many row hashes the source keeps for WRITESET dependency tracking; when the history fills up or the binary log rotates, it is cleared and parallelism temporarily drops. Consider doubling the value (for example, to 50000) on write-heavy sources if the replica shows periodic spikes in the "waited at clock conflicts" error log statistic (see the section called “Error log multi-threaded replica statistics”) that align with binary log rotation. Larger values consume more memory on the source.

Parameter	Recommended value	Notes
`binlog_format`	ROW	Cluster parameter group. Static (requires reboot).
`binlog_group_commit_sync_delay`	0 (default)	Microseconds to delay group commit. Increasing this value groups more transactions together, improving parallelism on the replica at the cost of slight commit latency increase on the source. Only beneficial when using COMMIT_ORDER dependency tracking – WRITESET already tracks actual row-level dependencies regardless of commit timing. Dynamic.
`binlog_group_commit_sync_no_delay_count`	0 (default)	Maximum number of transactions to wait for before committing. Use with `binlog_group_commit_sync_delay` to cap the delay once enough transactions are batched. Only relevant for COMMIT_ORDER dependency tracking. Dynamic.

Replica-side parameters

Parameter	Recommended value	Notes
`replica_parallel_workers`	Start at the vCPU count, up to twice the vCPU count	Instance parameter group. Dynamic but requires replication restart. The community default is 4 as of MySQL 8.0.27 (and Aurora MySQL 3 versions based on it); earlier versions default to 0, which is deprecated as of MySQL 8.0.30. We recommend starting at the vCPU

Parameter	Recommended value	Notes
		count, then monitoring CPU utilization and the "Waited (count) when Workers occupied" error log statistic (see the section called “Error log multi-threaded replica statistics”). Increase only when "Waited (count) when Workers occupied" is consistently high and CPU utilization remains below 80%.
`replica_parallel_type`	LOGICAL_CLOCK	Cluster parameter group. Dynamic but requires replication restart.
`replica_pending_jobs_size_max`	>= `max_allowed_packet` on source	Instance parameter group. Dynamic.
`replica_preserve_commit_order`	ON	Cluster parameter group. Dynamic but requires replication restart.
`binlog_format`	OFF	Cluster parameter group. Static. Aurora-specific extension to disable binary logging.

After changing parallel worker settings, restart replication:

```
CALL mysql.rds_stop_replication;
CALL mysql.rds_start_replication;
```

Aurora-specific replication optimizations

Aurora MySQL provides the following features to improve binary log replication performance. The following table summarizes the availability, default state, and how to enable each feature.

Feature	Version	Default	How to enable / verify
In-memory relay log	Aurora MySQL 3.10+	ON (for Aurora-managed replication when conditions are met)	Automatically enabled for Aurora-managed replication (blue/green deployments, Aurora-to-Aurora, and cross-region replicas) when the replica uses single-threaded replication (`replica_parallel_workers=0`), multi-threaded replication with GTID mode and auto-positioning enabled, or file-based replication with `replica_preserve_commit_order=ON`. Controlled by the dynamic `aurora_in_memory_relaylog` parameter (DB cluster or instance level): stop replication, set it to `ON` or `OFF` in the parameter group, then restart replication – no instance reboot required. Not available on Aurora Serverless. Verify the current status with `SHOW GLOBAL STATUS LIKE 'Aurora_in_memory_relaylog_status'`. For more information, see In-memory relay log.
Parallel secondary index changes	Aurora MySQL 3.06+	OFF (`0`)	Set `aurora_binlog_replication_sec_index_parallel_workers` to the desired thread count. Stop replication, set the parameter, then start replication. No instance restart required. For more information, see Multithreaded binary log replication.
Binlog I/O cache	Aurora MySQL 2.10+ and 3.x	ON (automatic)	Automatically enabled. Reduces disk I/O on the source when serving binary log events to replicas. No configura

Feature	Version	Default	How to enable / verify
			tion needed. For more information, see Optimizing binlog replication.

Monitoring parallel replication

Use the following methods to monitor replication performance and identify bottlenecks in parallel apply:

Performance Schema

Key tables for monitoring MTR:

- `performance_schema.replication_applier_status_by_worker` – Shows details of transactions handled by each worker thread, including apply timestamps and errors.
- `performance_schema.replication_applier_status_by_coordinator` – Shows information about the coordinator thread's buffering activity.

To evaluate how evenly work is distributed across worker threads, use the following query:

```
SELECT
  a.channel_name,
  rw1.thread_id AS replica_worker_thread_id,
  ts1.count_star AS number_of_trx_executed,
  ROUND((ts1.count_star / sum_count_star) * 100, 2) AS
 percent_of_trx_executed_by_worker
FROM (
  SELECT rw.channel_name, SUM(ts.count_star) AS sum_count_star
  FROM performance_schema.events_transactions_summary_by_thread_by_event_name AS ts
    JOIN performance_schema.replication_applier_status_by_worker AS rw
      ON ts.thread_id = rw.thread_id
  GROUP BY rw.channel_name
) AS a
JOIN performance_schema.replication_applier_status_by_worker AS rw1
  ON a.channel_name = rw1.channel_name
JOIN performance_schema.events_transactions_summary_by_thread_by_event_name AS ts1
  ON rw1.thread_id = ts1.thread_id;
```

If one or two workers handle the majority of transactions, it indicates high transaction dependencies limiting parallelism. Consider switching to WRITESET dependency tracking on the source.

If the I/O thread and SQL thread positions are close to each other but `Seconds_Behind_Source` is still growing, the coordinator thread itself might be the bottleneck. Check `performance_schema.replication_applier_status_by_coordinator` for buffering delays. A coordinator bottleneck typically indicates heavy transaction dependencies or an overloaded single coordinator thread that cannot distribute events fast enough.

Error log multi-threaded replica statistics

When `log_error_verbosity=3` (the default), Aurora MySQL writes multi-threaded replica statistics to the MySQL error log periodically. You can view these entries by:

- In the RDS console, in the **Logs & events** section, view the error log.
- Downloading via AWS CLI: `aws rds download-db-log-file-portion --db-instance-identifier <instance-id> --log-file-name error/mysql-error-running.log`
- If CloudWatch Logs export is enabled for the error log, searching in the exported log group.

To locate the multi-threaded replica statistics entries in the error log, search for the string shown in the following example. The MySQL error log uses legacy terminology in this internal string; this documentation uses the preferred term "replica" throughout.

The following is an example error log entry:

```
2026-05-10 14:54:28.045308 [Note] [MY-010559] [Repl] Multi-threaded slave statistics
 for channel '': seconds elapsed = 120; events assigned = 7215200; worker queues filled
 over overrun level = 0; waited due a Worker queue full = 0; waited due the total size
 = 0; waited at clock conflicts = 1203644200 waited (count) when Workers occupied =
 1022462 waited when Workers occupied = 62349203500
```

Key fields to analyze:

Field	Description	Action
seconds elapsed	Time in seconds since the last statistics output. Aurora MySQL does not write statistics at	Use to calculate throughput: events assigned / seconds

Field	Description	Action
	regular intervals – it writes them based on the number of events executed plus time elapsed.	elapsed = average events per interval.
events assigned	Number of events assigned by the coordinator thread to worker threads since the last output.	Monitor for changes in replicati on throughput over time.
Worker queues filled over overrun level	Number of events queued to worker threads in excess of the overrun level (90% of maximum queue length of 16384 events). If zero, no workers are operating at upper capacity.	Indicates workers cannot keep up with the coordinator. Check for long-running transactions or missing indexes.
Waited due a Worker queue full	Number of times the coordinat or had to wait because a worker thread's queue was full (reached 100% capacity).	Check for long-running transactions, missing indexes, or lock contention on worker threads.
Waited due the total size	Number of times the coordinat or waited because the `replica_pending_jo bs_size_max` limit was reached. If an unusually large event exceeds this size, the transaction is held until all workers have empty queues.	Increase `replica_p ending_jobs_size_max` . Check for large transactions on the source.

Field	Description	Action
Waited at clock conflicts	Number of nanoseconds the coordinator waited because a transaction depended on another transaction that had not yet been committed. This quantifies the time events could not be assigned due to dependencies.	Switch to WRITESET dependency tracking on the source. Ensure tables have primary keys. Some clock conflict waiting is expected – focus on reducing the ratio relative to other waits.
Waited (count) when Workers occupied	Number of times the coordinator needed to assign the first event of a transaction but all worker queues were non-empty. The coordinator sleeps until a queue becomes empty.	This indicates `replica_parallel_workers` is underprovisioned. Dependencies are not the bottleneck – you could have executed more events in parallel but lacked available worker threads. Increase `replica_parallel_workers`.
Waited when Workers occupied	Total nanoseconds the coordinator slept while waiting for an empty worker queue.	High values confirm worker capacity is the bottleneck. Increase `replica_parallel_workers`.

Worked examples: diagnosing parallel apply bottlenecks

The following examples show how to use the preceding monitoring sources to diagnose common parallel apply bottlenecks. Each example starts from the same symptom – `Seconds_Behind_Source` is steadily growing and you have already confirmed the SQL thread is the bottleneck (see Identifying the replication lag bottleneck) – and uses the multi-threaded replica statistics and Performance Schema to determine the corrective action.

Example 1: Workers are underprovisioned

In CloudWatch, the `ReplicaLag` metric climbs steadily from near zero to approximately 400 seconds over 30 minutes. CPU utilization on the replica stays around 55%, so the replica is not CPU-bound.

To confirm where the lag is, run `SHOW REPLICA STATUS` twice, 60 seconds apart. `Read_Source_Log_Pos` advances by approximately 1.2 GB while `Exec_Source_Log_Pos` advances by only approximately 300 MB. The I/O thread is keeping up with the source, but the SQL thread is falling behind – the SQL thread is the bottleneck.

MTR is enabled with `replica_parallel_workers=4`. Retrieve the most recent multi-threaded replica statistics from the error log (see the section called “Error log multi-threaded replica statistics”):

```
2026-05-10 14:54:28.045308 [Note] [MY-010559] [Repl] Multi-threaded slave statistics
 for channel '': seconds elapsed = 123; events assigned = 9876544; worker queues filled
 over overrun level = 0; waited due a Worker queue full = 0; waited due the total
 size = 0; waited at clock conflicts = 8455000 waited (count) when Workers occupied =
 2456789 waited when Workers occupied = 110293847000
```

Interpret the key fields:

- **waited when Workers occupied = 110293847000** nanoseconds, or approximately 110 seconds. Out of the 123 seconds in this interval, the coordinator spent roughly 90% of its time waiting for a worker thread to become free.
- **waited at clock conflicts = 8455000** nanoseconds, or approximately 0.008 seconds, which is negligible. Transaction dependencies are not the limiting factor.

Diagnosis: the coordinator consistently has more independent transactions ready to apply than it has workers to run them. Because clock-conflict waiting is negligible, parallelism is limited by worker count, not by dependencies.

Action: increase `replica_parallel_workers` to the replica's vCPU count (for example, 16 on a `db.r6g.4xlarge`) and restart replication:

```
CALL mysql.rds_stop_replication;
CALL mysql.rds_start_replication;
```

Verification: a later statistics line shows the wait has nearly disappeared, and `ReplicaLag` returns to under 5 seconds:

```
2026-05-10 15:02:14.882201 [Note] [MY-010559] [Repl] Multi-threaded slave statistics
 for channel '': seconds elapsed = 120; events assigned = 31840552; worker queues
 filled over overrun level = 0; waited due a Worker queue full = 0; waited due the
 total size = 0; waited at clock conflicts = 9120000 waited (count) when Workers
 occupied = 41233 waited when Workers occupied = 5980411000
```

"waited when Workers occupied" dropped from approximately 110 seconds to approximately 6 seconds, and throughput (events assigned) more than tripled. Stop increasing workers once CPU utilization approaches 80% or the wait stops decreasing.

Example 2: COMMIT_ORDER dependency tracking serializes a low-concurrency workload

The source is an Amazon RDS for MySQL instance running an OLTP workload with only 4–8 concurrently committing application threads. The replica is a `db.r6g.4xlarge` with `replica_parallel_workers=16` and `replica_parallel_type=LOGICAL_CLOCK`. Despite 16 workers, `ReplicaLag` holds steady around 600 seconds and replica CPU utilization is only about 20% – the workers look idle.

First, check how evenly transactions are distributed across workers using the worker-distribution query from the section called “Performance Schema”:

```
+--------------+--------------------------+-----------------------
+-----------------------------------+
| channel_name | replica_worker_thread_id | number_of_trx_executed |
 percent_of_trx_executed_by_worker |
+--------------+--------------------------+-----------------------
+-----------------------------------+
|              |                       45 |                1903556 |
          96.41 |
|              |                       46 |                  23104 |
           1.17 |
|              |                       47 |                  18995 |
           0.96 |
|              |                       48 |                  16720 |
           0.85 |
.
.
```

```
+--------------+--------------------------+-----------------------
+----------------------------------+
```

The preceding output shows the first 4 of the 16 worker threads. One worker is applying over 96% of transactions while the other 15 are nearly idle (each of the remaining workers executed less than 0.05%). Apply is effectively serial.

Next, confirm this with the multi-threaded replica statistics in the error log:

```
2026-05-10 15:22:11.110432 [Note] [MY-010559] [Repl] Multi-threaded slave statistics
 for channel '': seconds elapsed = 120; events assigned = 2014500; worker queues filled
 over overrun level = 0; waited due a Worker queue full = 0; waited due the total size
 = 0; waited at clock conflicts = 98712340000 waited (count) when Workers occupied =
 50122 waited when Workers occupied = 1209847000
```

- **waited at clock conflicts = 98712340000** nanoseconds, or approximately 99 of the 120 seconds. The coordinator spent about 82% of the interval unable to dispatch the next transaction because it depended on one still being applied.
- **waited when Workers occupied = 1209847000** nanoseconds, or approximately 1.2 seconds. Workers were almost always free, so more workers do not help.

This points to a dependency problem, not a capacity problem. Check the dependency tracking method on the **source**:

```
SELECT @@global.binlog_transaction_dependency_tracking;
```

```
+-------------------------------------------------+
| @@global.binlog_transaction_dependency_tracking |
+-------------------------------------------------+
| COMMIT_ORDER                                    |
+-------------------------------------------------+
```

Root cause: with `COMMIT_ORDER`, the source decides which transactions can run in parallel based on which transactions committed together in the same binary log group commit. In this low-concurrency workload only a handful of threads commit at a time, so group commits are tiny. As a result, the source stamps nearly every transaction with a `last_committed` value equal to the previous transaction's `sequence_number`, marking it as dependent on the one before it. The

replica must then apply them one after another – even though they modify completely unrelated rows – which is why 15 of the 16 workers sit idle.

Action: switch the source to row-level dependency tracking, which is independent of commit timing. Set it dynamically and persist it in the cluster (or DB) parameter group:

```
SET GLOBAL binlog_transaction_dependency_tracking = WRITESET;
```

`WRITESET` computes a hash of the rows each transaction modifies, so transactions touching different rows receive independent timestamps and can be applied in parallel regardless of when they committed. Ensure all tables have primary keys, because WRITESET produces empty writesets for tables without them (see Troubleshooting SQL thread lag). On MySQL 8.4, WRITESET is the default and this parameter no longer exists.

Verification: after the change, the worker-distribution query shows work spread evenly across all workers (showing the first 4 of 16; each worker now handles roughly 6% of transactions):

```
+--------------+--------------------------+-----------------------
+-----------------------------------+
| channel_name | replica_worker_thread_id | number_of_trx_executed |
 percent_of_trx_executed_by_worker |
+--------------+--------------------------+-----------------------
+-----------------------------------+
|              |                       45 |                 132540 |
          6.30 |
|              |                       46 |                 125610 |
          5.97 |
|              |                       47 |                 129774 |
          6.17 |
|              |                       48 |                 122901 |
          5.84 |
.
.
+--------------+--------------------------+-----------------------
+-----------------------------------+
```

and the error-log statistics show clock conflicts collapsing while `ReplicaLag` falls to near zero:

```
2026-05-10 15:41:55.204713 [Note] [MY-010559] [Repl] Multi-threaded slave statistics
 for channel '': seconds elapsed = 120; events assigned = 19874100; worker queues
 filled over overrun level = 0; waited due a Worker queue full = 0; waited due the
```

```
total size = 0; waited at clock conflicts = 412300000 waited (count) when Workers
occupied = 88122 waited when Workers occupied = 7019847000
```

"waited at clock conflicts" dropped from approximately 99 seconds to approximately 0.4 seconds, throughput rose roughly tenfold, and the bottleneck shifted from dependencies to worker capacity – at which point you can tune worker count as in Example 1.

Example 3: A missing primary key forces full table scans on the replica

`ReplicaLag` spikes during a nightly batch job that runs large `UPDATE` and `DELETE` statements, then recovers afterward. During the spike, replica CPU is moderate but one worker appears stuck.

On the replica, run `SHOW PROCESSLIST` and look at the replication worker threads. One worker stays in the `Updating` state on the same statement for many seconds at a time:

```
+----+-------------+------+---------+----------+------+
| Id | User        | db   | Command | State    | Time |
+----+-------------+------+---------+----------+------+
| 12 | system user | app  | Connect | Updating |   38 |
+----+-------------+------+---------+----------+------+
```

Check which replicated tables lack a primary key using the detection query from Troubleshooting SQL thread lag:

```
+--------------+----------------+
| table_schema | table_name     |
+--------------+----------------+
| app          | events_archive |
+--------------+----------------+
```

Root cause: with ROW-based binary logging, each row in an `UPDATE` or `DELETE` event must be located on the replica before it can be applied. If the table has no primary key or unique NOT NULL key, the replica performs a full table scan for **every** affected row. On a multi-million-row table, a batch operation turns into millions of full scans, and the worker applying it stalls – blocking apply progress and driving up lag.

Action: add a primary key to the table. If you cannot define an explicit key immediately, enable Generated Invisible Primary Keys (GIPK) by setting the `sql_generate_invisible_primary_key` parameter to `ON` (available in Aurora MySQL 3

versions based on MySQL 8.0.30 and later), so new tables receive an automatic primary key (see Troubleshooting SQL thread lag).

Verification: after adding the primary key, the worker no longer lingers in `Updating`, the SQL thread apply rate recovers, and `ReplicaLag` returns to baseline during the next batch window.

Example 4: A single large transaction cannot be parallelized

`ReplicaLag` jumps sharply at a predictable time each day, holds for several minutes, then drops back to near zero. WRITESET dependency tracking is enabled, `replica_parallel_workers=16`, and all tables have primary keys, so the earlier examples do not apply.

During the spike, the worker-distribution query shows one worker busy and the rest idle, but unlike Example 2 the error log shows neither high clock conflicts nor worker-occupied waits:

```
2026-05-10 02:13:40.551922 [Note] [MY-010559] [Repl] Multi-threaded slave statistics
 for channel '': seconds elapsed = 95; events assigned = 4120000; worker queues filled
 over overrun level = 0; waited due a Worker queue full = 0; waited due the total size
 = 0; waited at clock conflicts = 1530000 waited (count) when Workers occupied = 980
 waited when Workers occupied = 210440000
```

Both dependency waits and worker-occupied waits are low, yet only one worker is active. This rules out both the dependency bottleneck (Example 2) and the worker-capacity bottleneck (Example 1).

Inspect the busy worker in `performance_schema.replication_applier_status_by_worker`, or run `SHOW PROCESSLIST`. A single worker is applying one transaction for the entire duration of the spike. On the source, an application job runs one large statement – for example, `DELETE FROM orders WHERE created_at < '2025-01-01'` affecting several million rows – as a single transaction.

Root cause: MTR parallelizes **across** independent transactions; it cannot split a single transaction across workers. A large transaction is applied by exactly one worker, so adding workers, switching to WRITESET, or adding primary keys does not help. For more information, see Multi-threaded replication (MTR).

Action: break the large operation into smaller batches on the source (for example, delete in chunks of a few thousand rows per transaction, with a brief pause between batches). Smaller transactions commit independently, so the replica can spread them across workers. Schedule bulk jobs during low-traffic windows where possible.

Verification: after batching the job, the daily `ReplicaLag` spike flattens, and the worker-distribution query shows the batch spread across multiple workers instead of one.

Monitoring best practices

1. Configure CloudWatch alarms on the `ReplicaLag` metric with appropriate thresholds.
2. Use heartbeat tables for more accurate lag measurement than `Seconds_Behind_Source`. For example, use `pt-heartbeat`, which requires separate installation (see Percona Toolkit on the Percona website).
3. Monitor `SumBinaryLogSize` CloudWatch metric on the source to track binary log generation rate.
4. Enable CloudWatch Logs log exports for the error log to retain multi-threaded replica statistics.
5. Use Enhanced Monitoring for CPU, memory, and I/O utilization on both source and replica.
6. Use Amazon CloudWatch Database Insights to identify top wait events and queries causing resource contention. Performance Insights reaches end of life on July 31, 2026; after that date the Performance Insights console redirects to CloudWatch Database Insights. Choose the Database Insights mode that fits your needs – Standard mode preserves the core monitoring experience and pricing, while Advanced mode adds fleet-level monitoring, lock diagnostics, and execution plan capture. For more information, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

Best practices for minimizing replication lag

The following recommendations summarize the key actions for minimizing replication lag. For detailed guidance on each topic, follow the cross-reference links.

1. **Ensure all tables have primary keys** – Without primary keys, the replica performs full table scans for each modified row in UPDATE and DELETE operations. For more information, see Troubleshooting SQL thread lag.
2. **Enable multi-threaded replication with WRITESET** – Parallelizes SQL apply for independent transactions. For configuration details, see Multi-threaded replication (MTR).
3. **Use at least the same instance class as the source** – Provides sufficient CPU, memory, and network resources for replication. For more information, see the section called “Optimization strategies for I/O thread lag”.
4. **Keep transaction sizes small** – Large transactions reduce parallelism and increase History List Length. For more information, see Troubleshooting SQL thread lag.

5. **Disable binary logging on replicas** – Set `binlog_format=OFF` unless downstream replication is needed. For parameter details, see the section called “MTR configuration”.
6. **Avoid long-running transactions and queries on replicas** – Long-running read transactions prevent history list purging, which can degrade replication performance.
7. **Enable GTID-based replication** – Provides automatic position tracking and enables the Aurora in-memory relay log (Aurora MySQL 3.10+). For more information, see Aurora-specific replication optimizations.

Amazon Aurora MySQL reference

This reference includes information about Aurora MySQL parameters, status variables, and general SQL extensions or differences from the community MySQL database engine.

Topics

- Aurora MySQL configuration parameters
- Aurora MySQL global status variables
- Aurora MySQL wait events
- Aurora MySQL thread states
- Aurora MySQL isolation levels
- Aurora MySQL hints
- Aurora MySQL stored procedure reference
- Aurora MySQL–specific information_schema tables

Aurora MySQL configuration parameters

You manage your Amazon Aurora MySQL DB cluster in the same way that you manage other Amazon RDS DB instances, by using parameters in a DB parameter group. Amazon Aurora differs from other DB engines in that you have a DB cluster that contains multiple DB instances. As a result, some of the parameters that you use to manage your Aurora MySQL DB cluster apply to the entire cluster. Other parameters apply only to a particular DB instance in the DB cluster.

To manage cluster-level parameters, use DB cluster parameter groups. To manage instance-level parameters, use DB parameter groups. Each DB instance in an Aurora MySQL DB cluster is compatible with the MySQL database engine. However, you apply some of the MySQL database engine parameters at the cluster level, and you manage these parameters using DB cluster parameter groups. You can't find cluster-level parameters in the DB parameter group for an instance in an Aurora DB cluster. A list of cluster-level parameters appears later in this topic.

You can manage both cluster-level and instance-level parameters using the Amazon Web Services Management Console, the Amazon CLI, or the Amazon RDS API. You use separate commands for managing cluster-level parameters and instance-level parameters. For example, you can use the modify-db-cluster-parameter-group CLI command to manage cluster-level parameters in a DB cluster parameter group. You can use the modify-db-parameter-group CLI command to manage instance-level parameters in a DB parameter group for a DB instance in a DB cluster.

You can view both cluster-level and instance-level parameters in the console, or by using the CLI or RDS API. For example, you can use the describe-db-cluster-parameters Amazon CLI command to view cluster-level parameters in a DB cluster parameter group. You can use the describe-db-parameters CLI command to view instance-level parameters in a DB parameter group for a DB instance in a DB cluster.

> **Note**
>
> Each default parameter group contains the default values for all parameters in the parameter group. If the parameter has "engine default" for this value, see the version-specific MySQL or PostgreSQL documentation for the actual default value.
> Unless otherwise noted, parameters listed in the following tables are valid for Aurora MySQL versions 2 and 3.

For more information about DB parameter groups, see Parameter groups for Amazon Aurora.

Topics

- Cluster-level parameters
- Instance-level parameters
- MySQL parameters that don't apply to Aurora MySQL

Cluster-level parameters

The following table shows all of the parameters that apply to the entire Aurora MySQL DB cluster.

Parameter name	Modifiable	Notes
`aurora_binlog_read_buffer_size`	Yes	Only affects clusters that use binary log (binlog) replication. For information about binlog replication, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication). Removed from Aurora MySQL version 3.

Parameter name	Modifiable	Notes
aurora_binlog_replication_max_yield_seconds	Yes	Only affects clusters that use binary log (binlog) replication. For information about binlog replication, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).
aurora_binlog_replication_sec_index_parallel_workers	Yes	Sets the total number of parallel threads available to apply secondary index changes when replicating transactions for large tables with more than one secondary index. The parameter is set to 0 (disabled) by default. This parameter is available in Aurora MySQL version 306 and higher. For more information, see Optimizing binary log replication for Aurora MySQL.
aurora_binlog_use_large_read_buffer	Yes	Only affects clusters that use binary log (binlog) replication. For information about binlog replication, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication). Removed from Aurora MySQL version 3.

Parameter name	Modifiable	Notes
aurora_disable_hash_join	Yes	Set this parameter to ON to turn off hash join optimization in Aurora MySQL version 2.09 or higher. It isn't supported for version 3. For more information, see Parallel query for Amazon Aurora MySQL.
aurora_enable_memory_management	Yes	Available in Aurora MySQL version 8.4 and higher. When set to ON (the default), Aurora automatically manages memory recovery actions and the aurora_oom_response parameter is ignored. When set to OFF, Aurora uses the aurora_oom_response parameter to determine which recovery actions to take. For more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases.
aurora_enable_replica_log_compression	Yes	For more information, see Performance considerations for Amazon Aurora MySQL replication. Doesn't apply to clusters that are part of an Aurora global database. Removed from Aurora MySQL version 3.
aurora_enable_repl_bin_log_filtering	Yes	For more information, see Performance considerations for Amazon Aurora MySQL replication. Doesn't apply to clusters that are part of an Aurora global database. Removed from Aurora MySQL version 3.

Parameter name	Modifiable	Notes
aurora_enable_staggered_replica_restart	Yes	This setting is available in Aurora MySQL version 3, but it isn't used.
aurora_enable_zdr	Yes	This setting is turned on by default in Aurora MySQL 2.10 and higher.
aurora_enable_validate_password_component	Yes	This parameter is available in Aurora MySQL version 8.4.7 and higher. The default value is 0 (false). When set to 1 (or true), Aurora enables the validate_password component. When set to 0 (or false), Aurora disables the component. The component is managed through this parameter instead of the INSTALL COMPONENT and UNINSTALL COMPONENT commands. For more information, see Using the validate_password component.
aurora_in_memory_relaylog	Yes	Sets the in memory relay log mode. You can use this feature on binlog replicas to improve binary log replication performance. To turn this feature off, set the parameter to OFF. To turn this feature on, set the parameter to ON.
aurora_enhanced_binlog	Yes	Set the value of this parameter to 1 to turn on the enhanced binlog in Aurora MySQL version 3.03.1 and higher. For more information, see Setting up enhanced binlog for Aurora MySQL.

Parameter name	Modifiable	Notes
aurora_full_double_precision_in_json	Yes	Set the value of this parameter to enable the parsing of floating point numbers in JSON documents with full precision.
aurora_jemalloc_background_thread	Yes	Use this parameter to enable a background thread to perform memory maintenance operations. The allowed values are 0 (disabled) and 1 (enabled). The default value is 0. This parameter applies to Aurora MySQL version 3.05 and higher.
aurora_jemalloc_dirty_decay_ms	Yes	Use this parameter to retain freed memory for a certain amount of time (in milliseconds). Retaining memory allows for faster reuse. The allowed values are 0–18446744073709551615 . The default value is 10000 (10 seconds). You can use a shorter delay to help avoid out-of-memory issues, at the expense of slower performance. This parameter applies to Aurora MySQL version 3.05 and higher.

Parameter name	Modifiable	Notes
aurora_jemalloc_tcache_enabled	Yes	Use this parameter to serve small memory requests (up to 32 KiB) in a thread local cache, bypassing the memory arenas. The allowed values are 0 (disabled) and 1 (enabled). The default value is 1. This parameter applies to Aurora MySQL version 3.05 and higher.
aurora_load_from_s3_role	Yes	For more information, see Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket. Currently not available in Aurora MySQL version 3. Use aws_default_s3_role .
aurora_mask_password_hashes_type	Yes	This setting is turned on by default in Aurora MySQL 2.11 and higher. Use this setting to mask Aurora MySQL password hashes in the slow query and audit logs. The allowed values are 0 and 1 (default). When set to 1, passwords are logged as <secret>. When set to 0, passwords are logged as hash (#) values.
aurora_select_into_s3_role	Yes	For more information, see Saving data from an Amazon Aurora MySQL DB cluster into text files in an Amazon S3 bucket. Currently not available in Aurora MySQL version 3. Use aws_default_s3_role .

Parameter name	Modifiable	Notes
`authentication_kerberos_caseins_cmp`	Yes	Controls case-insensitive username comparison for the `authentication_kerberos` plugin. Set it to `true` for case-insensitive comparison. By default, case-sensitive comparison is used (`false`). For more information, see Using Kerberos authentication for Aurora MySQL. This parameter is available in Aurora MySQL version 3.03 and higher.
`authentication_policy`	Yes	This parameter is available in Aurora MySQL version 8.4.7 and higher. Supported values are `*:caching_sha2_password` (default) and `*:mysql_native_password` . For more information, see Authentication policy (new in 8.4).
`auto_increment_increment`	Yes	None
`auto_increment_offset`	Yes	None
`aws_default_lambda_role`	Yes	For more information, see Invoking a Lambda function from an Amazon Aurora MySQL DB cluster.

Parameter name	Modifiable	Notes
aws_default_s3_role	Yes	Used when invoking the LOAD DATA FROM S3, LOAD XML FROM S3, or SELECT INTO OUTFILE S3 statement from your DB cluster. In Aurora MySQL version 2, the IAM role specified in this parameter is used if an IAM role isn't specified for aurora_load_from_s3_role or aurora_select_into_s3_role for the appropriate statement. In Aurora MySQL version 3, the IAM role specified for this parameter is always used. For more information, see Associating an IAM role with an Amazon Aurora MySQL DB cluster.
binlog_backup	Yes	Set the value of this parameter to 0 to turn on the enhanced binlog in Aurora MySQL version 3.03.1 and higher. You can turn off this parameter only when you use enhanced binlog. For more information, see Setting up enhanced binlog for Aurora MySQL.
binlog_checksum	Yes	The Amazon CLI and RDS API report a value of None if this parameter isn't set. In that case, Aurora MySQL uses the engine default value, which is CRC32. This is different from the explicit setting of NONE, which turns off the checksum.

Parameter name	Modifiable	Notes
binlog-do-db	Yes	This parameter applies to Aurora MySQL version 3.
binlog_format	Yes	For more information, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).
binlog_group_commit_sync_delay	Yes	This parameter applies to Aurora MySQL version 3.
binlog_group_commit_sync_no_delay_count	Yes	This parameter applies to Aurora MySQL version 3.
binlog-ignore-db	Yes	This parameter applies to Aurora MySQL version 3.
binlog_replication_globaldb	Yes	Set the value of this parameter to 0 to turn on the enhanced binlog in Aurora MySQL version 3.03.1 and higher. You can turn off this parameter only when you use enhanced binlog. For more information, see Setting up enhanced binlog for Aurora MySQL.
binlog_row_image	Yes	None
binlog_row_metadata	Yes	This parameter applies to Aurora MySQL version 3.
binlog_row_value_options	Yes	This parameter applies to Aurora MySQL version 3.
binlog_rows_query_log_events	Yes	None

Parameter name	Modifiable	Notes
binlog_transaction_compression	Yes	This parameter applies to Aurora MySQL version 3.
binlog_transaction_compression_level_zstd	Yes	This parameter applies to Aurora MySQL version 3.
binlog_transaction_dependency_history_size	Yes	This parameter sets an upper limit on the number of row hashes that are kept in memory and used for looking up the transaction that last modified a given row. After this number of hashes has been reached, the history is purged. This parameter applies to Aurora MySQL version 2.12 and higher, and version 3.
binlog_transaction_dependency_tracking	Yes	This parameter only applies to Aurora MySQL version 3. In Aurora MySQL version 8.4.7, the server uses the WRITESET behavior by default.
character-set-client-handshake	Yes	None
character_set_client	Yes	None
character_set_connection	Yes	None
character_set_database	Yes	The character set used by the default database. The default value is utf8mb4.
character_set_filesystem	Yes	None
character_set_results	Yes	None

Parameter name	Modifiable	Notes
character_set_server	Yes	None
collation_connection	Yes	None
collation_server	Yes	None
completion_type	Yes	None
default_storage_engine	No	Aurora MySQL clusters use the InnoDB storage engine for all of your data.
enforce_gtid_consistency	Sometimes	Modifiable in Aurora MySQL version 2 and higher.
event_scheduler	Yes	Indicates the status of the Event Scheduler. Modifiable only at the cluster level in Aurora MySQL version 3.
gtid-mode	Sometimes	Modifiable in Aurora MySQL version 2 and higher.
information_schema_stats_expiry	Yes	The number of seconds after which the MySQL database server fetches data from the storage engine and replaces the data in the cache. The allowed values are 0–31536000. This parameter applies to Aurora MySQL version 3.

Parameter name	Modifiable	Notes
`init_connect`	Yes	The command to be run by the server for each client that connects. Use double quotes (") for settings to avoid connection failures, for example: `SET optimizer_switch="hash_join =off"` In Aurora MySQL version 3, this parameter doesn't apply for users who have the `CONNECTION_ADMIN` privilege. This includes the Aurora master user. For more information, see Role-based privilege model.
`innodb_adaptive_hash_index`	Yes	You can modify this parameter at the DB cluster level in Aurora MySQL versions 2 and 3. The Adaptive Hash Index isn't supported on reader DB instances.

Parameter name	Modifiable	Notes
innodb_aurora_instant_alter_column_allowed	Yes	Controls whether the INSTANT algorithm can be used for ALTER COLUMN operations at the global level. The allowed values are the following: • 0 – The INSTANT algorithm isn't allowed for ALTER COLUMN operations (OFF). Reverts to other algorithms. • 1 – The INSTANT algorithm is allowed for ALTER COLUMN operations (ON). This is the default value. For more information, see Column Operations in the MySQL documentation. This parameter applies to Aurora MySQL version 3.05 and higher.
innodb_autoinc_lock_mode	Yes	None
innodb_checksums	No	Removed from Aurora MySQL version 3.
innodb_cmp_per_index_enabled	Yes	None
innodb_commit_concurrency	Yes	None
innodb_data_home_dir	No	Aurora MySQL uses managed instances where you don't access the file system directly.

Parameter name	Modifiable	Notes
innodb_deadlock_detect	Yes	This option is used to disable deadlock detection in Aurora MySQL version 2.11 and higher and version 3. On high-concurrency systems, deadlock detection can cause a slowdown when numerous threads wait for the same lock. Consult the MySQL documentation for more information on this parameter.
innodb_default_row_format	Yes	This parameter defines the default row format for InnoDB tables (including user-created InnoDB temporary tables). It applies to Aurora MySQL versions 2 and 3. Its value can be DYNAMIC, COMPACT, or REDUNDANT.
innodb_file_per_table	Yes	This parameter affects how table storage is organized. For more information, see Storage scaling.
innodb_flush_log_at_trx_commit	Yes	We highly recommend that you use the default value of 1. In Aurora MySQL version 3, before you can set this parameter to a value other than 1, you must set the value of innodb_trx_commit_allow_data_loss to 1. For more information, see Configuring how frequently the log buffer is flushed.

Parameter name	Modifiable	Notes
innodb_ft_max_token_size	Yes	None
innodb_ft_min_token_size	Yes	None
innodb_ft_num_word_optimize	Yes	None
innodb_ft_sort_pll_degree	Yes	None
innodb_online_alter_log_max_size	Yes	None
innodb_optimize_fulltext_only	Yes	None
innodb_page_size	No	None
innodb_print_all_deadlocks	Yes	When turned on, records information about all InnoDB deadlocks in the Aurora MySQL error log. For more information, see Minimizing and troubleshooting Aurora MySQL deadlocks.
innodb_purge_batch_size	Yes	None
innodb_purge_threads	Yes	None
innodb_rollback_on_timeout	Yes	None
innodb_rollback_segments	Yes	None
innodb_spin_wait_delay	Yes	None
innodb_strict_mode	Yes	None
innodb_support_xa	Yes	Removed from Aurora MySQL version 3.

Parameter name	Modifiable	Notes
innodb_sync_array_size	Yes	None
innodb_sync_spin_loops	Yes	None
innodb_stats_include_delete_marked	Yes	When this parameter is enabled, InnoDB includes delete-marked records when calculating persistent optimizer statistics. This parameter applies to Aurora MySQL version 2.12 and higher, and version 3.
innodb_table_locks	Yes	None
innodb_trx_commit_allow_data_loss	Yes	In Aurora MySQL version 3, set the value of this parameter to 1 so that you can change the value of innodb_flush_log_at_trx_commit . The default value of innodb_trx_commit_allow_data_loss is 0. For more information, see Configuring how frequently the log buffer is flushed.
innodb_undo_directory	No	Aurora MySQL uses managed instances where you don't access the file system directly.

Parameter name	Modifiable	Notes
internal_tmp_disk_storage_engine	Yes	Controls which in-memory storage engine is used for internal temporary tables. Allowed values are INNODB and MYISAM. This parameter applies to Aurora MySQL version 2.
internal_tmp_mem_storage_engine	Yes	Controls which in-memory storage engine is used for internal temporary tables. Allowed values are MEMORY and TempTable . This parameter applies to Aurora MySQL version 3.
key_buffer_size	Yes	Key cache for MyISAM tables. For more information, see keycache->cache_lock mutex.
lc_time_names	Yes	None
log_error_suppression_list	Yes	Specifies a list of error codes that aren't logged in the MySQL error log. This allows you to ignore certain noncritical error conditions to help keep your error logs clean. For more information, see log_error_suppression_list in the MySQL documentation. This parameter applies to Aurora MySQL version 3.03 and higher.

Parameter name	Modifiable	Notes
low_priority_updates	Yes	INSERT, UPDATE, DELETE, and LOCK TABLE WRITE operations wait until there's no pending SELECT operation . This parameter affects only storage engines that use only table-level locking (MyISAM, MEMORY, MERGE). This parameter applies to Aurora MySQL version 3.

Parameter name	Modifiable	Notes
`lower_case_table_names`	Yes (Aurora MySQL version 2) Only at cluster creation time (Aurora MySQL version 3)	In Aurora MySQL version 2.10 and higher 2.x versions, make sure to reboot all reader instances after changing this setting and rebooting the writer instance. For details, see Rebooting an Aurora cluster with read availability. In Aurora MySQL version 3, the value of this parameter is set permanently at the time the cluster is created. If you use a nondefault value for this option, set up your Aurora MySQL version 3 custom parameter group before upgrading, and specify the parameter group during the snapshot restore operation that creates the version 3 cluster. With an Aurora global database based on Aurora MySQL, you can't perform an in-place upgrade from Aurora MySQL version 2 to version 3 if the `lower_case_table_names` parameter is turned on. For more information on the methods that you can use, see Major version upgrades.
`master-info-repository`	Yes	Removed from Aurora MySQL version 3.
`master_verify_checksum`	Yes	Aurora MySQL version 2. Use `source_verify_checksum` in Aurora MySQL version 3.

Parameter name	Modifiable	Notes
max_delayed_threads	Yes	Sets the maximum number of threads to handle INSERT DELAYED statements. This parameter applies to Aurora MySQL version 3.
max_error_count	Yes	The maximum number of error, warning, and note messages to be stored for display. This parameter applies to Aurora MySQL version 3.
max_execution_time	Yes	The timeout for running SELECT statements, in milliseconds. The value can be from 0–18446744073709551615. When set to 0, there is no timeout. For more information, see max_execution_time in the MySQL documentation.
min_examined_row_limit	Yes	Use this parameter to prevent queries that examine fewer than the specified number of rows from being logged.
partial_revokes	No	This parameter applies to Aurora MySQL version 3.
password_history	Yes	Available in Aurora MySQL version 8.4 and higher.
password_require_current	Yes	Available in Aurora MySQL version 8.4 and higher.

Parameter name	Modifiable	Notes
password_reuse_interval	Yes	Available in Aurora MySQL version 8.4 and higher.
preload_buffer_size	Yes	The size of the buffer that's allocated when preloading indexes. This parameter applies to Aurora MySQL version 3.
query_cache_type	Yes	Removed from Aurora MySQL version 3.

Parameter name	Modifiable	Notes
read_only	Yes	When this parameter is turned on, the server permits no updates except from those performed by replica threads. For Aurora MySQL version 2, valid values are the following: • 0 – OFF • 1 – ON • {TrueIfReplica} – ON for read replicas. This is the default value. • {TrueIfClusterReplica} – ON for replica clusters such as cross-Region read replicas, secondary clusters in an Aurora global database, and blue/green deployments. For Aurora MySQL version 3, valid values are the following: • 0 – OFF. This is the default value. • 1 – ON • {TrueIfClusterReplica} – ON for replica clusters such as cross-Region read replicas, secondary clusters in an Aurora global database, and blue/green deployments. In Aurora MySQL version 3, this parameter doesn't apply for users who have the CONNECTION_ADMIN privilege. This includes the Aurora

Parameter name	Modifiable	Notes
		master user. For more information, see Role-based privilege model.
relay-log-space-limit	Yes	This parameter applies to Aurora MySQL version 3.
replica_parallel_type	Yes	This parameter enables parallel execution on the replica of all uncommitted threads already in the prepare phase, without violating consistency. It applies to Aurora MySQL version 3. In Aurora MySQL version 3.03.* and lower, the default value is DATABASE. In Aurora MySQL version 3.04 and higher, the default value is LOGICAL_CLOCK.
replica_preserve_commit_order	Yes	This parameter applies to Aurora MySQL version 3.
replica_transaction_retries	Yes	This parameter applies to Aurora MySQL version 3.
replica_type_conversions	Yes	This parameter determines the type conversions used on replicas. The allowed values are: ALL_LOSSY , ALL_NON_LOSSY , ALL_SIGNED , and ALL_UNSIGNED . For more information, see Replication with differing table definitions on source and replica in the MySQL documentation. This parameter applies to Aurora MySQL version 3.

Parameter name	Modifiable	Notes
replicate-do-db	Yes	This parameter applies to Aurora MySQL version 3.
replicate-do-table	Yes	This parameter applies to Aurora MySQL version 3.
replicate-ignore-db	Yes	This parameter applies to Aurora MySQL version 3.
replicate-ignore-table	Yes	This parameter applies to Aurora MySQL version 3.
replicate-wild-do-table	Yes	This parameter applies to Aurora MySQL version 3.
replicate-wild-ignore-table	Yes	This parameter applies to Aurora MySQL version 3.
require_secure_transport	Yes	This parameter applies to Aurora MySQL version 2 and 3. For more information, see TLS connections to Aurora MySQL DB clusters.
rpl_read_size	Yes	This parameter applies to Aurora MySQL version 3.
server_audit_cw_upload	No	This parameter has been deprecated in Aurora MySQL. Use server_audit_logs_upload . For more information, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.
server_audit_events	Yes	For more information, see Using Advanced Auditing with an Amazon Aurora MySQL DB cluster.

Parameter name	Modifiable	Notes
server_audit_excl_users	Yes	For more information, see Using Advanced Auditing with an Amazon Aurora MySQL DB cluster.
server_audit_incl_users	Yes	For more information, see Using Advanced Auditing with an Amazon Aurora MySQL DB cluster.
server_audit_logging	Yes	For instructions on uploading the logs to Amazon CloudWatch Logs, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.
server_audit_logs_upload	Yes	You can publish audit logs to CloudWatch Logs by enabling Advanced Auditing and setting this parameter to 1. The default for the server_audit_logs_upload parameter is 0. For more information, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.
server_id	No	None
skip-character-set-client-handshake	Yes	None
skip_name_resolve	No	None
slave-skip-errors	Yes	Only applies to Aurora MySQL version 2 clusters, with MySQL 5.7 compatibility.
source_verify_checksum	Yes	This parameter applies to Aurora MySQL version 3.

Parameter name	Modifiable	Notes
sync_frm	Yes	Removed from Aurora MySQL version 3.
thread_cache_size	Yes	The number of threads to be cached. This parameter applies to Aurora MySQL versions 2 and 3.
time_zone	Yes	By default, the time zone for an Aurora DB cluster is Universal Time Coordinated (UTC). You can set the time zone for instances in your DB cluster to the local time zone for your application instead. For more information, see Local time zone for Amazon Aurora DB clusters.
tls_version	Yes	For more information, see TLS versions for Aurora MySQL.
validate_password.check_user_name	Yes	Available in Aurora MySQL version 8.4 and higher.
validate_password.dictionary_file	No	This parameter is not supported in Aurora MySQL version 8.4. The parameter is visible in the parameter group but cannot be modified.
validate_password.length	Yes	Available in Aurora MySQL version 8.4 and higher.
validate_password.mixed_case_count	Yes	Available in Aurora MySQL version 8.4 and higher.
validate_password.number_count	Yes	Available in Aurora MySQL version 8.4 and higher.

Parameter name	Modifiable	Notes
validate_password.policy	Yes	Available in Aurora MySQL version 8.4.7 and higher. Only LOW and MEDIUM levels are supported by Aurora MySQL.
validate_password.special_char_count	Yes	Available in Aurora MySQL version 8.4 and higher.

Instance-level parameters

The following table shows all of the parameters that apply to a specific DB instance in an Aurora MySQL DB cluster.

Parameter name	Modifiable	Notes
activate_all_roles_on_login	Yes	This parameter applies to Aurora MySQL version 3.
allow-suspicious-udfs	No	None
aurora_disable_hash_join	Yes	Set this parameter to ON to turn off hash join optimization in Aurora MySQL version 2.09 or higher. It isn't supported for version 3. For more information, see Parallel query for Amazon Aurora MySQL.
aurora_lab_mode	Yes	For more information, see Amazon Aurora MySQL lab mode. Removed from Aurora MySQL version 3.
aurora_oom_response	Yes	This parameter is supported for Aurora MySQL versions 2 and 3. Also available in Aurora MySQL 8.4 but only considered when aurora_enable_memory_management is set to OFF. For

Parameter name	Modifiable	Notes
		more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases.
aurora_parallel_query	Yes	Set to ON to turn on parallel query in Aurora MySQL version 2.09 or higher. The old aurora_pq parameter isn't used in these versions. For more information, see Parallel query for Amazon Aurora MySQL.
aurora_pq	Yes	Set to OFF to turn off parallel query for specific DB instances in Aurora MySQL versions before 2.09. In version 2.09 or higher, turn parallel query on and off with aurora_parallel_query instead. For more information, see Parallel query for Amazon Aurora MySQL.
aurora_read_replica_read_committed	Yes	Enables READ COMMITTED isolation level for Aurora Replicas and changes the isolation behavior to reduce purge lag during long-running queries. Enable this setting only if you understand the behavior changes and how they affect your query results. For example, this setting uses less-strict isolation than the MySQL default. When it's enabled, long-running queries might see more than one copy of the same row because Aurora reorganizes the table data while the query is running. For more information, see Aurora MySQL isolation levels.

Parameter name	Modifiable	Notes
aurora_tmptable_enable_per_table_limit	Yes	Determines whether the tmp_table_size parameter controls the maximum size of in-memory temporary tables created by the TempTable storage engine in Aurora MySQL version 3.04 and higher. For more information, see Limiting the size of internal, in-memory temporary tables.
aurora_transaction_timeout	Yes	Sets the maximum duration, in seconds, for an InnoDB transaction. Transactions that exceed this duration are rolled back. A value of 0 (the default) disables the timeout. Available in Aurora MySQL version 8.4.8 and higher. For more information, see Transaction timeout in Amazon Aurora MySQL.
aurora_use_vector_instructions	Yes	When this parameter is enabled, Aurora MySQL uses optimized vector processing instructions provided by modern CPUs to improve performance on I/O-intensive workloads. This setting is enabled by default in Aurora MySQL version 3.05 and higher.
autocommit	Yes	None
automatic_sp_privileges	Yes	None
back_log	Yes	None

Parameter name	Modifiable	Notes
basedir	No	Aurora MySQL uses managed instances where you don't access the file system directly.
binlog_cache_size	Yes	None
binlog_max_flush_queue_time	Yes	None
binlog_order_commits	Yes	None
binlog_stmt_cache_size	Yes	None
binlog_transaction_compression	Yes	This parameter applies to Aurora MySQL version 3.
binlog_transaction_compression_level_zstd	Yes	This parameter applies to Aurora MySQL version 3.
bulk_insert_buffer_size	Yes	None
concurrent_insert	Yes	None
connect_timeout	Yes	None
core-file	No	Aurora MySQL uses managed instances where you don't access the file system directly.
datadir	No	Aurora MySQL uses managed instances where you don't access the file system directly.
default_authentication_plugin	No	This parameter applies to Aurora MySQL version 3.
default_password_lifetime	Yes	Available in Aurora MySQL version 8.4 and higher.

Parameter name	Modifiable	Notes
default_time_zone	No	None
default_tmp_storage_engine	Yes	The default storage engine for temporary tables.
default_week_format	Yes	None
delay_key_write	Yes	None
disconnect_on_expired_password	Yes	Available in Aurora MySQL version 8.4 and higher.
delayed_insert_limit	Yes	None
delayed_insert_timeout	Yes	None
delayed_queue_size	Yes	None
div_precision_increment	Yes	None
end_markers_in_json	Yes	None
eq_range_index_dive_limit	Yes	None
event_scheduler	Sometimes	Indicates the status of the Event Scheduler. Modifiable only at the cluster level in Aurora MySQL version 3.
explicit_defaults_for_timestamp	Yes	None
flush	No	None
flush_time	Yes	None
ft_boolean_syntax	No	None

Parameter name	Modifiable	Notes
ft_max_word_len	Yes	None
ft_min_word_len	Yes	None
ft_query_expansion_limit	Yes	None
ft_stopword_file	Yes	None
general_log	Yes	For instructions on uploading the logs to CloudWatch Logs, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.
general_log_file	No	Aurora MySQL uses managed instances where you don't access the file system directly.
group_concat_max_len	Yes	None
host_cache_size	Yes	None
init_connect	Yes	The command to be run by the server for each client that connects. Use double quotes (") for settings to avoid connection failures, for example: `SET optimizer_switch="hash_join =off"` In Aurora MySQL version 3, this parameter doesn't apply for users who have the CONNECTION_ADMIN privilege, including the Aurora master user. For more information, see Role-based privilege model.

Parameter name	Modifiable	Notes
innodb_adaptive_hash_index	Yes	You can modify this parameter at the DB instance level in Aurora MySQL version 2. It's modifiable only at the DB cluster level in Aurora MySQL version 3. The Adaptive Hash Index isn't supported on reader DB instances.
innodb_adaptive_max_sleep_delay	Yes	Modifying this parameter has no effect because innodb_thread_concurrency is always 0 for Aurora.
innodb_aurora_max_partitions_for_range	Yes	In some cases where persisted statistics aren't available, you can use this parameter to improve the performance of row count estimations on partitioned tables. You can set it to a value from 0–8192, where the value determines the number of partitions to check during row count estimation. The default value is 0, which estimates using all of the partitions, consistent with default MySQL behavior. This parameter is available for Aurora MySQL version 3.03.1 and higher.
innodb_autoextend_increment	Yes	None
innodb_buffer_pool_dump_at_shutdown	No	None
innodb_buffer_pool_dump_now	No	None

Parameter name	Modifiable	Notes
innodb_buffer_pool_filename	No	None
innodb_buffer_pool_load_abort	No	None
innodb_buffer_pool_load_at_startup	No	None
innodb_buffer_pool_load_now	No	None
innodb_buffer_pool_size	Yes	The default value is represented by a formula. For details about how the DBInstanceClassMemory value in the formula is calculated, see DB parameter formula variables.
innodb_change_buffer_max_size	No	Aurora MySQL doesn't use the InnoDB change buffer at all.
innodb_compression_failure_threshold_pct	Yes	None
innodb_compression_level	Yes	None
innodb_compression_pad_pct_max	Yes	None
innodb_concurrency_tickets	Yes	Modifying this parameter has no effect, because innodb_thread_concurrency is always 0 for Aurora.

Parameter name	Modifiable	Notes
innodb_deadlock_detect	Yes	This option is used to disable deadlock detection in Aurora MySQL version 2.11 and higher and version 3. On high-concurrency systems, deadlock detection can cause a slowdown when numerous threads wait for the same lock. Consult the MySQL documenta tion for more information on this parameter.
innodb_file_format	Yes	Removed from Aurora MySQL version 3.
innodb_flushing_avg_loops	No	None
innodb_force_load_corrupted	No	None
innodb_ft_aux_table	Yes	None
innodb_ft_cache_size	Yes	None
innodb_ft_enable_stopword	Yes	None
innodb_ft_server_stopword_t able	Yes	None
innodb_ft_user_stopword_tab le	Yes	None
innodb_large_prefix	Yes	Removed from Aurora MySQL version 3.
innodb_lock_wait_timeout	Yes	None
innodb_log_compressed_pages	No	None

Parameter name	Modifiable	Notes
innodb_lru_scan_depth	Yes	None
innodb_max_purge_lag	Yes	None
innodb_max_purge_lag_delay	Yes	None
innodb_monitor_disable	Yes	None
innodb_monitor_enable	Yes	None
innodb_monitor_reset	Yes	None
innodb_monitor_reset_all	Yes	None
innodb_old_blocks_pct	Yes	None
innodb_old_blocks_time	Yes	None
innodb_open_files	Yes	None
innodb_print_all_deadlocks	Yes	When turned on, records informati on about all InnoDB deadlocks in the Aurora MySQL error log. For more information, see Minimizing and troubleshooting Aurora MySQL deadlocks.
innodb_random_read_ahead	Yes	None
innodb_read_ahead_threshold	Yes	None
innodb_read_io_threads	No	Aurora MySQL manages the value of this parameter automatically based on the DB instance class. The value scales with the number of vCPUs on the instance.

Parameter name	Modifiable	Notes
innodb_read_only	No	Aurora MySQL manages the read-only and read/write state of DB instances based on the type of cluster. For example, a provisioned cluster has one read/write DB instance (the *primary instance*) and any other instances in the cluster are read-only (the Aurora Replicas).
innodb_replication_delay	Yes	None
innodb_sort_buffer_size	Yes	None
innodb_stats_auto_recalc	Yes	None
innodb_stats_method	Yes	None
innodb_stats_on_metadata	Yes	None
innodb_stats_persistent	Yes	None
innodb_stats_persistent_sample_pages	Yes	None
innodb_stats_transient_sample_pages	Yes	None
innodb_thread_concurrency	No	None
innodb_thread_sleep_delay	Yes	Modifying this parameter has no effect because innodb_thread_concurrency is always 0 for Aurora.

Parameter name	Modifiable	Notes
interactive_timeout	Yes	Aurora evaluates the minimum value of interactive_timeout and wait_timeout . It then uses that minimum as the timeout to end all idle sessions, both interactive and noninteractive.
internal_tmp_disk_storage_engine	Yes	Controls which in-memory storage engine is used for internal temporary tables. Allowed values are INNODB and MYISAM. This parameter applies to Aurora MySQL version 2.
internal_tmp_mem_storage_engine	Sometimes	Controls which in-memory storage engine is used for internal temporary tables. Allowed values for writer DB instances are MEMORY and TempTable . For reader DB instances, this parameter is set to TempTable and can't be modified. This parameter applies to Aurora MySQL version 3.
join_buffer_size	Yes	None
keep_files_on_create	Yes	None
key_buffer_size	Yes	Key cache for MyISAM tables. For more information, see keycache->cache_lock mutex.
key_cache_age_threshold	Yes	None

Parameter name	Modifiable	Notes
key_cache_block_size	Yes	None
key_cache_division_limit	Yes	None
local_infile	Yes	None
lock_wait_timeout	Yes	None
log-bin	No	Setting binlog_format to STATEMENT, MIXED, or ROW automatically sets log-bin to ON. Setting binlog_format to OFF automatically sets log-bin to OFF. For more information, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).
log_bin_trust_function_creators	Yes	None
log_bin_use_v1_row_events	Yes	Removed from Aurora MySQL version 3.
log_error	No	None
log_error_suppression_list	Yes	Specifies a list of error codes that aren't logged in the MySQL error log. This allows you to ignore certain noncritical error conditions to help keep your error logs clean. For more information, see log_error_suppression_list in the MySQL documentation. This parameter applies to Aurora MySQL version 3.03 and higher.

Parameter name	Modifiable	Notes
log_output	Yes	None
log_queries_not_using_indexes	Yes	None
log_slave_updates	No	Aurora MySQL version 2. Use log_replica_updates in Aurora MySQL version 3.
log_replica_updates	No	Aurora MySQL version 3
log_throttle_queries_not_using_indexes	Yes	None
log_warnings	Yes	Removed from Aurora MySQL version 3.
long_query_time	Yes	None
low_priority_updates	Yes	INSERT, UPDATE, DELETE, and LOCK TABLE WRITE operations wait until there's no pending SELECT operation . This parameter affects only storage engines that use only table-level locking (MyISAM, MEMORY, MERGE). This parameter applies to Aurora MySQL version 3.
max_allowed_packet	Yes	None
max_binlog_cache_size	Yes	None
max_binlog_size	No	None
max_binlog_stmt_cache_size	Yes	None
max_connect_errors	Yes	None

Parameter name	Modifiable	Notes
max_connections	Yes	The default value is represented by a formula. For details about how the DBInstanceClassMemory value in the formula is calculated, see DB parameter formula variables. For the default values depending on the instance class, see Maximum connections to an Aurora MySQL DB instance.
max_delayed_threads	Yes	Sets the maximum number of threads to handle INSERT DELAYED statements. This parameter applies to Aurora MySQL version 3.
max_error_count	Yes	The maximum number of error, warning, and note messages to be stored for display. This parameter applies to Aurora MySQL version 3.
max_execution_time	Yes	The timeout for running SELECT statements, in milliseconds. The value can be from 0–18446744073709551615. When set to 0, there is no timeout. For more information, see max_execution_time in the MySQL documentation.
max_heap_table_size	Yes	None
max_insert_delayed_threads	Yes	None

Parameter name	Modifiable	Notes
max_join_size	Yes	None
max_length_for_sort_data	Yes	Removed from Aurora MySQL version 3.
max_prepared_stmt_count	Yes	None
max_seeks_for_key	Yes	None
max_sort_length	Yes	None
max_sp_recursion_depth	Yes	None
max_tmp_tables	Yes	Removed from Aurora MySQL version 3.
max_user_connections	Yes	None
max_write_lock_count	Yes	None
metadata_locks_cache_size	Yes	Removed from Aurora MySQL version 3.
min_examined_row_limit	Yes	Use this parameter to prevent queries that examine fewer than the specified number of rows from being logged. This parameter applies to Aurora MySQL version 3.
myisam_data_pointer_size	Yes	None
myisam_max_sort_file_size	Yes	None
myisam_mmap_size	Yes	None
myisam_sort_buffer_size	Yes	None
myisam_stats_method	Yes	None

Parameter name	Modifiable	Notes
myisam_use_mmap	Yes	None
net_buffer_length	Yes	None
net_read_timeout	Yes	None
net_retry_count	Yes	None
net_write_timeout	Yes	None
old-style-user-limits	Yes	None
old_passwords	Yes	Removed from Aurora MySQL version 3.
optimizer_prune_level	Yes	None
optimizer_search_depth	Yes	None
optimizer_switch	Yes	For information about Aurora MySQL features that use this switch, see Best practices with Amazon Aurora MySQL.
optimizer_trace	Yes	None
optimizer_trace_features	Yes	None
optimizer_trace_limit	Yes	None
optimizer_trace_max_mem_size	Yes	None
optimizer_trace_offset	Yes	None

Parameter name	Modifiable	Notes
performance-schema-consumer-events-waits-current	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance-schema-consumer-events-waits-current. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance-schema-instrument	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance-schema-instrument. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema	Yes	If the **Source** column is set to Modified, Performance Insights is managing the Performance Schema. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_accounts_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_accounts_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_consumer_global_instrumentation	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_global_instrumentation. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_consumer_thread_instrumentation	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_thread_instrumentation. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_consumer_events_stages_current	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_events_stages_current. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_consumer_events_stages_history	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_events_stages_history. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_consumer_events_stages_history_long	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_events_stages_history_long. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_consumer_events_statements_current	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_events_statements_current. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_consumer_events_statements_history	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_events_statements_history. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_consumer_events_statements_history_long	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_events_statements_history_long. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_consumer_events_waits_history	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_events_waits_history. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_consumer_events_waits_history_long	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_events_waits_history_long. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_consumer_statements_digest	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_consumer_statements_digest. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_digests_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_digests_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_events_stages_history_long_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_events_stages_history_long_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_events_stages_history_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_events_stages_history_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_events_statements_history_long_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_events_statements_history_long_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_events_statements_history_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_events_statements_history_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_events_transactions_history_long_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_events_transactions_history_long_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_events_transactions_history_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_events_transactions_history_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_events_waits_history_long_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_events_waits_history_long_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_events_waits_history_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_events_waits_history_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_hosts_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_hosts_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_cond_classes	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_cond_classes. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_cond_instances	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_cond_instances. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_max_digest_length	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_digest_length. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_file_classes	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_file_classes. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_file_handles	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_file_handles. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_max_file_instances	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_file_instances. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_index_stat	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_index_stat. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_memory_classes	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_memory_classes. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_max_metadata_locks	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_metadata_locks. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_mutex_classes	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_mutex_classes. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_mutex_instances	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_mutex_instances. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_max_prepared_statements_instances	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_prepared_statements_instances. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_program_instances	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_program_instances. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_rwlock_classes	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_rwlock_classes. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_max_rwlock_instances	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_rwlock_instances. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_socket_classes	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_socket_classes. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_socket_instances	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_socket_instances. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_max_sql_text_length	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_sql_text_length. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_stage_classes	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_stage_classes. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_statement_classes	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_statement_classes. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_max_statement_stack	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_statement_stack. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_table_handles	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_table_handles. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_table_instances	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_table_instances. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_max_table_lock_stat	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_table_lock_stat. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_thread_classes	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_thread_classes. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_max_thread_instances	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_max_thread_instances. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_session_connect_attrs_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_session_connect_attrs_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_setup_actors_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_setup_actors_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
performance_schema_setup_objects_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_setup_objects_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_show_processlist	Yes	This parameter determines which SHOW PROCESSLIST implementation to use: • The default implementation iterates across active threads from within the thread manager while holding a global mutex. This can cause slow performance, especially on busy systems. • The alternative SHOW PROCESSLIST implementation is based on the Performance Schema processlist table. This implementation queries active thread data from the Performance Schema rather than the thread manager and doesn't require a mutex. This parameter applies to Aurora MySQL version 2.12 and higher, and version 3. If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_show_processlist. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.

Parameter name	Modifiable	Notes
performance_schema_users_size	Yes	If the **Source** column for the parameter performance_schema is set to Modified, performance schema is using the parameter performance_schema_users_size. For more information about enabling the Performance Schema, see Determining whether Database Insights is managing the Performance Schema.
pid_file	No	None
plugin_dir	No	Aurora MySQL uses managed instances where you don't access the file system directly.
port	No	Aurora MySQL manages the connection properties and enforces consistent settings for all DB instances in a cluster.
preload_buffer_size	Yes	The size of the buffer that's allocated when preloading indexes. This parameter applies to Aurora MySQL version 3.
profiling_history_size	Yes	None
query_alloc_block_size	Yes	None
query_cache_limit	Yes	Removed from Aurora MySQL version 3.
query_cache_min_res_unit	Yes	Removed from Aurora MySQL version 3.

Parameter name	Modifiable	Notes
query_cache_size	Yes	The default value is represented by a formula. For details about how the DBInstanceClassMemory value in the formula is calculated, see DB parameter formula variables. Removed from Aurora MySQL version 3.
query_cache_type	Yes	Removed from Aurora MySQL version 3.
query_cache_wlock_invalidate	Yes	Removed from Aurora MySQL version 3.
query_prealloc_size	Yes	None
range_alloc_block_size	Yes	None
read_buffer_size	Yes	None

Parameter name	Modifiable	Notes
read_only	Yes	When this parameter is turned on, the server permits no updates except from those performed by replica threads. For Aurora MySQL version 2, valid values are the following: • 0 – OFF • 1 – ON • {TrueIfReplica} – ON for read replicas. This is the default value. • {TrueIfClusterReplica} – ON for instances in replica clusters such as cross-Region read replicas, secondary clusters in an Aurora global database, and blue/green deployments. We recommend that you use the DB cluster parameter group in Aurora MySQL version 2 to make sure that the read_only parameter is applied to new writer instances on failover. **Note** Reader instances are always read only, because Aurora MySQL sets innodb_read_only to 1 on all readers. Therefore, read_only is redundant on reader instances.

Parameter name	Modifiable	Notes
		Removed at the instance level from Aurora MySQL version 3.
read_rnd_buffer_size	Yes	None
relay-log	No	None
relay_log_info_repository	Yes	Removed from Aurora MySQL version 3.
relay_log_recovery	No	None
replica_checkpoint_group	Yes	Aurora MySQL version 3
replica_checkpoint_period	Yes	Aurora MySQL version 3
replica_parallel_workers	Yes	Aurora MySQL version 3
replica_pending_jobs_size_max	Yes	Aurora MySQL version 3
replica_skip_errors	Yes	Aurora MySQL version 3
replica_sql_verify_checksum	Yes	Aurora MySQL version 3
safe-user-create	Yes	None
secure_auth	Yes	This parameter is always turned on in Aurora MySQL version 2. Trying to turn it off generates an error. Removed from Aurora MySQL version 3.
secure_file_priv	No	Aurora MySQL uses managed instances where you don't access the file system directly.

Parameter name	Modifiable	Notes
show_create_table_verbosity	Yes	Enabling this variable causes SHOW_CREATE_TABLE to display the ROW_FORMAT regardless of whether it's the default format. This parameter applies to Aurora MySQL version 2.12 and higher, and version 3.
skip-slave-start	No	None
skip_external_locking	No	None
skip_show_database	Yes	None
slave_checkpoint_group	Yes	Aurora MySQL version 2. Use replica_checkpoint_group in Aurora MySQL version 3.
slave_checkpoint_period	Yes	Aurora MySQL version 2. Use replica_checkpoint_period in Aurora MySQL version 3.
slave_parallel_workers	Yes	Aurora MySQL version 2. Use replica_parallel_workers in Aurora MySQL version 3.
slave_pending_jobs_size_max	Yes	Aurora MySQL version 2. Use replica_pending_jobs_size_max in Aurora MySQL version 3.
slave_sql_verify_checksum	Yes	Aurora MySQL version 2. Use replica_sql_verify_checksum in Aurora MySQL version 3.
slow_launch_time	Yes	None

Parameter name	Modifiable	Notes
slow_query_log	Yes	For instructions on uploading the logs to CloudWatch Logs, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.
slow_query_log_file	No	Aurora MySQL uses managed instances where you don't access the file system directly.
socket	No	None
sort_buffer_size	Yes	None
sql_mode	Yes	None
sql_select_limit	Yes	None
stored_program_cache	Yes	None
sync_binlog	No	None
sync_master_info	Yes	None
sync_source_info	Yes	This parameter applies to Aurora MySQL version 3.
sync_relay_log	Yes	Removed from Aurora MySQL version 3.
sync_relay_log_info	Yes	None
sysdate-is-now	Yes	None
table_cache_element_entry_ttl	No	None

Parameter name	Modifiable	Notes
table_definition_cache	Yes	The default value is represented by a formula. For details about how the DBInstanceClassMemory value in the formula is calculated, see DB parameter formula variables.
table_open_cache	Yes	The default value is represented by a formula. For details about how the DBInstanceClassMemory value in the formula is calculated, see DB parameter formula variables.
table_open_cache_instances	Yes	None
temp-pool	Yes	Removed from Aurora MySQL version 3.
temptable_max_mmap	Yes	This parameter applies to Aurora MySQL version 3. For details, see New temporary table behavior in Aurora MySQL version 3. In Aurora MySQL version 8.4.7 and higher, the default value is calculated as LEAST(4294967296, {AllocatedStorage*3/100}) . This formula sets the default to 3% of allocated storage, capped at a maximum of 4 GiB, and replaces the fixed 1 GiB default used in Aurora MySQL version 3.
temptable_max_ram	Yes	This parameter applies to Aurora MySQL version 3. For details, see New temporary table behavior in Aurora MySQL version 3.

Parameter name	Modifiable	Notes
temptable_use_mmap	Yes	This parameter applies to Aurora MySQL version 3. For details, see New temporary table behavior in Aurora MySQL version 3.
thread_cache_size	Yes	The number of threads to be cached. This parameter applies to Aurora MySQL versions 2 and 3.
thread_handling	No	None
thread_stack	Yes	None
timed_mutexes	Yes	None
tmp_table_size	Yes	Defines the maximum size of internal in-memory temporary tables created by the MEMORY storage engine in Aurora MySQL version 3. In Aurora MySQL version 3.04 and higher, defines the maximum size of internal in-memory temporary tables created by the TempTable storage engine when aurora_tmptable_enable_per_table_limit is ON. For more information, see Limiting the size of internal, in-memory temporary tables.
tmpdir	No	Aurora MySQL uses managed instances where you don't access the file system directly.
transaction_alloc_block_size	Yes	None

Parameter name	Modifiable	Notes
transaction_isolation	Yes	This parameter applies to Aurora MySQL version 3. It replaces tx_isolation .
transaction_prealloc_size	Yes	None
tx_isolation	Yes	Removed from Aurora MySQL version 3. It is replaced by transaction_isolation .
updatable_views_with_limit	Yes	None
validate-password	No	Removed from Aurora MySQL version 8.4.
validate_password_dictionary_file	No	Removed from Aurora MySQL version 8.4.
validate_password_length	No	Removed from Aurora MySQL version 8.4.
validate_password_mixed_case_count	No	Removed from Aurora MySQL version 8.4.
validate_password_number_count	No	Removed from Aurora MySQL version 8.4.
validate_password_policy	No	Removed from Aurora MySQL version 8.4.
validate_password_special_char_count	No	Removed from Aurora MySQL version 8.4.

Parameter name	Modifiable	Notes
wait_timeout	Yes	Aurora evaluates the minimum value of interactive_timeout and wait_timeout . It then uses that minimum as the timeout to end all idle sessions, both interactive and noninteractive.

MySQL parameters that don't apply to Aurora MySQL

Because of architectural differences between Aurora MySQL and MySQL, some MySQL parameters don't apply to Aurora MySQL.

The following MySQL parameters don't apply to Aurora MySQL. This list isn't exhaustive.

- activate_all_roles_on_login – This parameter doesn't apply to Aurora MySQL version 2. It is available in Aurora MySQL version 3.
- big_tables
- bind_address
- character_sets_dir
- innodb_adaptive_flushing
- innodb_adaptive_flushing_lwm
- innodb_buffer_pool_chunk_size
- innodb_buffer_pool_instances
- innodb_change_buffering
- innodb_checksum_algorithm
- innodb_data_file_path
- innodb_dedicated_server
- innodb_doublewrite
- innodb_flush_log_at_timeout – This parameter doesn't apply to Aurora MySQL. For more information, see Configuring how frequently the log buffer is flushed.
- innodb_flush_method

- innodb_flush_neighbors
- innodb_io_capacity
- innodb_io_capacity_max
- innodb_log_buffer_size
- innodb_log_file_size
- innodb_log_files_in_group
- innodb_log_spin_cpu_abs_lwm
- innodb_log_spin_cpu_pct_hwm
- innodb_log_writer_threads
- innodb_max_dirty_pages_pct
- innodb_numa_interleave
- innodb_page_size
- innodb_redo_log_capacity
- innodb_redo_log_encrypt
- innodb_undo_log_encrypt
- innodb_undo_log_truncate
- innodb_undo_logs
- innodb_undo_tablespaces
- innodb_use_native_aio
- innodb_write_io_threads

Aurora MySQL global status variables

Aurora MySQL includes status variables from community MySQL and variables that are unique to Aurora. You can examine these variables to learn about what's happening inside the database engine. For more information about the status variables in community MySQL, see Server Status Variables in the community MySQL 8.0 documentation.

You can find the current values for Aurora MySQL global status variables by using a statement such as the following:

```
show global status like '%aurora%';
```

> **Note**
>
> Global status variables are cleared when the DB engine reboots.

The following table describes the global status variables that Aurora MySQL uses.

Name	Description
`AuroraDb_commits`	The total number of commits since the last restart.
`AuroraDb_commit_latency`	The aggregate commit latency since the last restart.
`AuroraDb_ddl_stmt_duration`	The aggregate DDL latency since the last restart.
`AuroraDb_select_stmt_duration`	The aggregate `SELECT` statement latency since the last restart.
`AuroraDb_insert_stmt_duration`	The aggregate `INSERT` statement latency since the last restart.
`AuroraDb_update_stmt_duration`	The aggregate `UPDATE` statement latency since the last restart.
`AuroraDb_delete_stmt_duration`	The aggregate `DELETE` statement latency since the last restart.
`Aurora_binlog_io_cache_allocated`	The number of bytes allocated to the binlog I/O cache.
`Aurora_binlog_io_cache_read_requests`	The number of read requests made to the binlog I/O cache.
`Aurora_binlog_io_cache_reads`	The number of read requests that were served from the binlog I/O cache.

Name	Description
Aurora_enhanced_binlog	Indicates whether enhanced binlog is enabled or disabled for this DB instance. For more information, see Setting up enhanced binlog for Aurora MySQL.
Aurora_external_connection_count	The number of database connections to the DB instance, excluding RDS service connectio ns used for database health checks.
Aurora_fast_insert_cache_hits	A counter that's incremented when the cached cursor is successfully retrieved and verified. For more information on the fast insert cache, see Amazon Aurora MySQL performance enhancements.
Aurora_fast_insert_cache_misses	A counter that's incremented when the cached cursor is no longer valid and Aurora performs a normal index traversal. For more information on the fast insert cache, see Amazon Aurora MySQL performance enhancements.
Aurora_fts_cache_memory_used	The amount of memory in bytes that the InnoDB full-text search system is using. This variable applies to Aurora MySQL version 3.07 and higher.
Aurora_fwd_master_dml_stmt_count	The total number of DML statements forwarded to this writer DB instance. This variable applies to Aurora MySQL version 2.
Aurora_fwd_master_dml_stmt_ duration	The total duration of DML statements forwarded to this writer DB instance. This variable applies to Aurora MySQL version 2.
Aurora_fwd_master_errors_rp c_timeout	The number of times a forwarded connection failed to be established on the writer.

Name	Description
Aurora_fwd_master_errors_session_limit	The number of forwarded queries that get rejected due to `session full` on the writer.
Aurora_fwd_master_errors_session_timeout	The number of times a forwarding session is ended due to a timeout on the writer.
Aurora_fwd_master_open_sessions	The number of forwarded sessions on the writer DB instance. This variable applies to Aurora MySQL version 2.
Aurora_fwd_master_select_stmt_count	The total number of SELECT statements forwarded to this writer DB instance. This variable applies to Aurora MySQL version 2.
Aurora_fwd_master_select_stmt_duration	The total duration of SELECT statements forwarded to this writer DB instance. This variable applies to Aurora MySQL version 2.
Aurora_fwd_writer_dml_stmt_count	The total number of DML statements forwarded to this writer DB instance. This variable applies to Aurora MySQL version 3.
Aurora_fwd_writer_dml_stmt_duration	The total duration of DML statements forwarded to this writer DB instance. This variable applies to Aurora MySQL version 3.
Aurora_fwd_writer_errors_rpc_timeout	The number of times a forwarded connection failed to be established on the writer.
Aurora_fwd_writer_errors_session_limit	The number of forwarded queries that get rejected due to `session full` on the writer.
Aurora_fwd_writer_errors_session_timeout	The number of times a forwarding session is ended due to a timeout on the writer.

Name	Description
Aurora_fwd_writer_open_sessions	The number of forwarded sessions on the writer DB instance. This variable applies to Aurora MySQL version 3.
Aurora_fwd_writer_select_stmt_count	The total number of SELECT statements forwarded to this writer DB instance. This variable applies to Aurora MySQL version 3.
Aurora_fwd_writer_select_stmt_duration	The total duration of SELECT statements forwarded to this writer DB instance. This variable applies to Aurora MySQL version 3.
Aurora_lockmgr_buffer_pool_memory_used	The amount of buffer pool memory in bytes that the Aurora MySQL lock manager is using.
Aurora_lockmgr_memory_used	The amount of memory in bytes that the Aurora MySQL lock manager is using.
Aurora_ml_actual_request_cnt	The aggregate request count that Aurora MySQLmakes to the Aurora machine learning services across all queries run by users of the DB instance. For more information, see Using Amazon Aurora machine learning with Aurora MySQL.
Aurora_ml_actual_response_cnt	The aggregate response count that Aurora MySQL receives from the Aurora machine learning services across all queries run by users of the DB instance. For more informati on, see Using Amazon Aurora machine learning with Aurora MySQL.

Name	Description
`Aurora_ml_cache_hit_cnt`	The aggregate internal cache hit count that Aurora MySQL receives from the Aurora machine learning services across all queries run by users of the DB instance. For more information, see Using Amazon Aurora machine learning with Aurora MySQL.
`Aurora_ml_logical_request_cnt`	The number of logical requests that the DB instance has evaluated to be sent to the Aurora machine learning services since the last status reset. Depending on whether batching has been used, this value can be higher than `Aurora_ml_actual_request_cnt` . For more information, see Using Amazon Aurora machine learning with Aurora MySQL.
`Aurora_ml_logical_response_cnt`	The aggregate response count that Aurora MySQL receives from the Aurora machine learning services across all queries run by users of the DB instance. For more informati on, see Using Amazon Aurora machine learning with Aurora MySQL.
`Aurora_ml_retry_request_cnt`	The number of retried requests that the DB instance has sent to the Aurora machine learning services since the last status reset. For more information, see Using Amazon Aurora machine learning with Aurora MySQL.
`Aurora_ml_single_request_cnt`	The aggregate count of Aurora machine learning functions that are evaluated by non-batch mode across all queries run by users of the DB instance. For more information, see Using Amazon Aurora machine learning with Aurora MySQL.

Name	Description
aurora_oom_avoidance_recovery_state	Indicates whether Aurora out-of-memory (OOM) avoidance recovery is in the ACTIVE or INACTIVE state for this DB instance. This variable applies to Aurora MySQL version 3.06.0 and higher.
aurora_oom_reserved_mem_enter_kb	Represents the threshold for entering the RESERVED state in Aurora's OOM handling mechanism. When the available memory on the server falls below this threshold, aurora_oom_status changes to RESERVED, indicating that the server is approaching a critical level of memory usage. This variable applies to Aurora MySQL version 3.06.0 and higher.
aurora_oom_reserved_mem_exit_kb	Represents the threshold for exiting the RESERVED state in Aurora's OOM handling mechanism. When the available memory on the server rises above this threshold, aurora_oom_status reverts to NORMAL, indicating that the server has returned to a more stable state with sufficient memory resources. This variable applies to Aurora MySQL version 3.06.0 and higher.

Name	Description
aurora_oom_status	Current memory health state of the DB instance: healthy (no memory pressure) , moderate memory pressure, or critical memory pressure. For more information, see Troubleshooting out-of-memory issues for Aurora MySQL databases. This variable applies to Aurora MySQL version 3.06.0 and higher.
Aurora_pq_bytes_returned	The number of bytes for the tuple data structures transmitted to the head node during parallel queries. Divide by 16,384 to compare against Aurora_pq_pages_pushed_down .
Aurora_pq_max_concurrent_requests	The maximum number of parallel query sessions that can run concurrently on this Aurora DB instance. This is a fixed number that depends on the Amazon DB instance class.
Aurora_pq_pages_pushed_down	The number of data pages (each with a fixed size of 16 KiB) where parallel query avoided a network transmission to the head node.
Aurora_pq_request_attempted	The number of parallel query sessions requested. This value might represent more than one session per query, depending on SQL constructs such as subqueries and joins.
Aurora_pq_request_executed	The number of parallel query sessions run successfully.

Name	Description
Aurora_pq_request_failed	The number of parallel query sessions that returned an error to the client. In some cases, a request for a parallel query might fail, for example due to a problem in the storage layer. In these cases, the query part that failed is retried using the nonparallel query mechanism . If the retried query also fails, an error is returned to the client and this counter is incremented.
Aurora_pq_request_in_progress	The number of parallel query sessions currently in progress. This number applies to the particular Aurora DB instance that you are connected to, not the entire Aurora DB cluster. To see if a DB instance is close to its concurrency limit, compare this value to Aurora_pq_max_concurrent_requests .
Aurora_pq_request_not_chosen	The number of times parallel query wasn't chosen to satisfy a query. This value is the sum of several other more granular counters. An EXPLAIN statement can increment this counter even though the query isn't actually performed.
Aurora_pq_request_not_chosen_below_min_rows	The number of times parallel query wasn't chosen due to the number of rows in the table. An EXPLAIN statement can increment this counter even though the query isn't actually performed.
Aurora_pq_request_not_chosen_column_bit	The number of parallel query requests that use the nonparallel query processing path because of an unsupported data type in the list of projected columns.

Name	Description
Aurora_pq_request_not_chosen_column_geometry	The number of parallel query requests that use the nonparallel query processing path because the table has columns with the GEOMETRY data type. For information about Aurora MySQL versions that remove this limitation, see Upgrading parallel query clusters to Aurora MySQL version 3.
Aurora_pq_request_not_chosen_column_lob	The number of parallel query requests that use the nonparallel query processing path because the table has columns with a LOB data type, or VARCHAR columns that are stored externally due to the declared length. For information about Aurora MySQL versions that remove this limitation, see Upgrading parallel query clusters to Aurora MySQL version 3.
Aurora_pq_request_not_chosen_column_virtual	The number of parallel query requests that use the nonparallel query processing path because the table contains a virtual column.
Aurora_pq_request_not_chosen_custom_charset	The number of parallel query requests that use the nonparallel query processing path because the table has columns with a custom character set.
Aurora_pq_request_not_chosen_fast_ddl	The number of parallel query requests that use the nonparallel query processing path because the table is currently being altered by a fast DDL ALTER statement.

Name	Description
Aurora_pq_request_not_chosen_ few_pages_outside_buffer_pool	The number of times parallel query wasn't chosen, even though less than 95 percent of the table data was in the buffer pool, because there wasn't enough unbuffered table data to make parallel query worthwhile.
Aurora_pq_request_not_chose n_full_text_index	The number of parallel query requests that use the nonparallel query processing path because the table has full-text indexes.
Aurora_pq_request_not_chosen_ high_buffer_pool_pct	The number of times parallel query wasn't chosen because a high percentage of the table data (currently, greater than 95 percent) was already in the buffer pool. In these cases, the optimizer determines that reading the data from the buffer pool is more efficient . An EXPLAIN statement can increment this counter even though the query isn't actually performed.
Aurora_pq_request_not_chose n_index_hint	The number of parallel query requests that use the nonparallel query processing path because the query includes an index hint.
Aurora_pq_request_not_chose n_innodb_table_format	The number of parallel query requests that use the nonparallel query processing path because the table uses an unsupported InnoDB row format. Aurora parallel query only applies to the COMPACT, REDUNDANT , and DYNAMIC row formats.

Name	Description
Aurora_pq_request_not_chosen_long_trx	The number of parallel query requests that used the nonparallel query processing path, due to the query being started inside a long-running transaction. An EXPLAIN statement can increment this counter even though the query isn't actually performed.
Aurora_pq_request_not_chosen_no_where_clause	The number of parallel query requests that use the nonparallel query processing path because the query doesn't include any WHERE clause.
Aurora_pq_request_not_chosen_range_scan	The number of parallel query requests that use the nonparallel query processing path because the query uses a range scan on an index.
Aurora_pq_request_not_chosen_row_length_too_long	The number of parallel query requests that use the nonparallel query processing path because the total combined length of all the columns is too long.
Aurora_pq_request_not_chosen_small_table	The number of times parallel query wasn't chosen due to the overall size of the table, as determined by number of rows and average row length. An EXPLAIN statement can increment this counter even though the query isn't actually performed.
Aurora_pq_request_not_chosen_temporary_table	The number of parallel query requests that use the nonparallel query processing path because the query refers to temporary tables that use the unsupported MyISAM or memory table types.

Name	Description
`Aurora_pq_request_not_chosen_tx_isolation`	The number of parallel query requests that use the nonparallel query processing path because query uses an unsupported transaction isolation level. On reader DB instances, parallel query only applies to the `REPEATABLE READ` and `READ COMMITTED` isolation levels.
`Aurora_pq_request_not_chosen_update_delete_stmts`	The number of parallel query requests that use the nonparallel query processing path because the query is part of an `UPDATE` or `DELETE` statement.
`Aurora_pq_request_not_chosen_unsupported_access`	The number of parallel query requests that use the nonparallel query processing path because the `WHERE` clause doesn't meet the criteria for parallel query. This result can occur if the query doesn't require a data-intensive scan, or if the query is a `DELETE` or `UPDATE` statement.
`Aurora_pq_request_not_chosen_unsupported_storage_type`	The number of parallel query requests that use the nonparallel query processing path because the Aurora MySQL DB cluster isn't using a supported Aurora cluster storage configuration. For more information, see Limitations. This parameter applies to Aurora MySQL version 3.04 and higher.
`Aurora_pq_request_throttled`	The number of times parallel query wasn't chosen due to the maximum number of concurrent parallel queries already running on a particular Aurora DB instance.

Name	Description
Aurora_repl_bytes_received	Number of bytes replicated to an Aurora MySQL reader database instance since the last restart. For more information, see Replication with Amazon Aurora MySQL.
Aurora_reserved_mem_exceeded_incidents	The number of times since the last restart that the engine has exceeded reserved memory limits. If aurora_oom_response is configured, this threshold defines when out-of-memory (OOM) avoidance activities are triggered. For more information on the Aurora MySQL OOM response, see Troubleshooting out-of-memory issues for Aurora MySQL databases.
aurora_temptable_max_ram_allocation	The maximum amount of memory, in bytes, used at any point by internal temporary tables since the last restart.
aurora_temptable_ram_allocation	The current amount of memory, in bytes, used by internal temporary tables.
Aurora_in_memory_relaylog_status	The current status of in memory relay log feature, the value can be ENABLED or DISABLED.
Aurora_in_memory_relaylog_disabled_reason	Shows the reason of current in memory relay log feature status, if the feature is disabled, display a message of explanation on why the feature is disabled.

Name	Description
`Aurora_in_memory_relaylog_fallback_count`	Show the total number of fallbacks of in memory relay log feature to persistent relay log mode (legacy). Fallback can be caused by either single event larger than cache size (currently 128MB) or transaction retry exceed the replica transaction retry limit replica_transaction_retries.
`Aurora_in_memory_relaylog_recovery_count`	Shows the total number of in memory relay log recovery performed automatically. This count includes the total number of fallbacks and the number of automatic mode switch back to in memory relay log mode after the temporary fallbacks.
`Aurora_thread_pool_thread_count`	The current number of threads in the Aurora thread pool. For more information on the thread pool in Aurora MySQL, see Thread pool.
`Aurora_tmz_version`	Denotes the current version of the time zone information used by the DB cluster. The values follow the Internet Assigned Numbers Authority (IANA) format: YYYY`suffix` , for example `2022a` and `2023c`. This parameter applies to Aurora MySQL version 2.12 and higher, and version 3.04 and higher.
`Aurora_zdr_oom_threshold`	Represents the memory threshold, in kilobytes (KB), for an Aurora DB instance to initiate a zero downtime restart (ZDR) to recover from potential memory-related issues.

Name	Description
server_aurora_das_running	Indicates whether Database Activity Streams (DAS) are enabled or disabled on this DB instance. For more information, see Monitoring Amazon Aurora with Database Activity Streams.

MySQL status variables that don't apply to Aurora MySQL

Because of architectural differences between Aurora MySQL and MySQL, some MySQL status variables don't apply to Aurora MySQL.

The following MySQL status variables don't apply to Aurora MySQL. This list isn't exhaustive.

- innodb_buffer_pool_bytes_dirty
- innodb_buffer_pool_pages_dirty
- innodb_buffer_pool_pages_flushed

Aurora MySQL version 3 removes the following status variables that were in Aurora MySQL version 2:

- AuroraDb_lockmgr_bitmaps0_in_use
- AuroraDb_lockmgr_bitmaps1_in_use
- AuroraDb_lockmgr_bitmaps_mem_used
- AuroraDb_thread_deadlocks
- available_alter_table_log_entries
- Aurora_lockmgr_memory_used
- Aurora_missing_history_on_replica_incidents
- Aurora_new_lock_manager_lock_release_cnt
- Aurora_new_lock_manager_lock_release_total_duration_micro
- Aurora_new_lock_manager_lock_timeout_cnt
- Aurora_total_op_memory

- Aurora_total_op_temp_space
- Aurora_used_alter_table_log_entries
- Aurora_using_new_lock_manager
- Aurora_volume_bytes_allocated
- Aurora_volume_bytes_left_extent
- Aurora_volume_bytes_left_total
- Com_alter_db_upgrade
- Compression
- External_threads_connected
- Innodb_available_undo_logs
- Last_query_cost
- Last_query_partial_plans
- Slave_heartbeat_period
- Slave_last_heartbeat
- Slave_received_heartbeats
- Slave_retried_transactions
- Slave_running
- Time_since_zero_connections

These MySQL status variables are available in Aurora MySQL version 2, but they aren't available in Aurora MySQL version 3:

- Innodb_redo_log_enabled
- Innodb_undo_tablespaces_total
- Innodb_undo_tablespaces_implicit
- Innodb_undo_tablespaces_explicit
- Innodb_undo_tablespaces_active

Aurora MySQL wait events

The following are some common wait events for Aurora MySQL.

> **Note**
>
> For information on tuning Aurora MySQL performance using wait events, see Tuning Aurora MySQL with wait events.
> For information about the naming conventions used in MySQL wait events, see Performance Schema instrument naming conventions in the MySQL documentation.

cpu

The number of active connections that are ready to run is consistently higher than the number of vCPUs. For more information, see cpu.

io/aurora_redo_log_flush

A session is persisting data to Aurora storage. Typically, this wait event is for a write I/O operation in Aurora MySQL. For more information, see io/aurora_redo_log_flush.

io/aurora_respond_to_client

Query processing has completed and results are being returned to the application client for the following Aurora MySQL versions: 2.10.2 and higher 2.10 versions, 2.09.3 and higher 2.09 versions, and 2.07.7 and higher 2.07 versions. Compare the network bandwidth of the DB instance class with the size of the result set being returned. Also, check client-side response times. If the client is unresponsive and can't process the TCP packets, packet drops and TCP retransmissions can occur. This situation negatively affects network bandwidth. In versions lower than 2.10.2, 2.09.3, and 2.07.7, the wait event erroneously includes idle time. To learn how to tune your database when this wait is prominent, see io/aurora_respond_to_client.

io/file/csv/data

Threads are writing to tables in comma-separated value (CSV) format. Check your CSV table usage. A typical cause of this event is setting `log_output` on a table.

io/file/sql/binlog

A thread is waiting on a binary log (binlog) file that is being written to disk.

io/redo_log_flush

A session is persisting data to Aurora storage. Typically, this wait event is for a write I/O operation in Aurora MySQL. For more information, see io/redo_log_flush.

io/socket/sql/client_connection

The `mysqld` program is busy creating threads to handle incoming new client connections. For more information, see io/socket/sql/client_connection.

io/table/sql/handler

The engine is waiting for access to a table. This event occurs regardless of whether the data is cached in the buffer pool or accessed on disk. For more information, see io/table/sql/handler.

lock/table/sql/handler

This wait event is a table lock wait event handler. For more information about atom and molecule events in the Performance Schema, see Performance Schema atom and molecule events in the MySQL documentation.

synch/cond/innodb/row_lock_wait

Multiple data manipulation language (DML) statements are accessing the same database rows at the same time. For more information, see synch/cond/innodb/row_lock_wait.

synch/cond/innodb/row_lock_wait_cond

Multiple DML statements are accessing the same database rows at the same time. For more information, see synch/cond/innodb/row_lock_wait_cond.

synch/cond/sql/MDL_context::COND_wait_status

Threads are waiting on a table metadata lock. The engine uses this type of lock to manage concurrent access to a database schema and to ensure data consistency. For more information, see Optimizing locking operations in the MySQL documentation. To learn how to tune your database when this event is prominent, see synch/cond/sql/MDL_context::COND_wait_status.

synch/cond/sql/MYSQL_BIN_LOG::COND_done

You have turned on binary logging. There might be a high commit throughput, large number transactions committing, or replicas reading binlogs. Consider using multirow statements or bundling statements into one transaction. In Aurora, use global databases instead of binary log replication, or use the `aurora_binlog_*` parameters.

synch/mutex/innodb/aurora_lock_thread_slot_futex

Multiple DML statements are accessing the same database rows at the same time. For more information, see synch/mutex/innodb/aurora_lock_thread_slot_futex.

synch/mutex/innodb/buf_pool_mutex

The buffer pool isn't large enough to hold the working data set. Or the workload accesses pages from a specific table, which leads to contention in the buffer pool. For more information, see synch/mutex/innodb/buf_pool_mutex.

synch/mutex/innodb/fil_system_mutex

The process is waiting for access to the tablespace memory cache. For more information, see synch/mutex/innodb/fil_system_mutex.

synch/mutex/innodb/trx_sys_mutex

Operations are checking, updating, deleting, or adding transaction IDs in InnoDB in a consistent or controlled manner. These operations require a `trx_sys` mutex call, which is tracked by Performance Schema instrumentation. Operations include management of the transaction system when the database starts or shuts down, rollbacks, undo cleanups, row read access, and buffer pool loads. High database load with a large number of transactions results in the frequent appearance of this wait event. For more information, see synch/mutex/innodb/trx_sys_mutex.

synch/mutex/mysys/KEY_CACHE::cache_lock

The `keycache->cache_lock` mutex controls access to the key cache for MyISAM tables. While Aurora MySQL doesn't allow usage of MyISAM tables to store persistent data, they are used to store internal temporary tables. Consider checking the `created_tmp_tables` or `created_tmp_disk_tables` status counters, because in certain situations, temporary tables are written to disk when they no longer fit in memory.

synch/mutex/sql/FILE_AS_TABLE::LOCK_offsets

The engine acquires this mutex when opening or creating a table metadata file. When this wait event occurs with excessive frequency, the number of tables being created or opened has spiked.

synch/mutex/sql/FILE_AS_TABLE::LOCK_shim_lists

The engine acquires this mutex while performing operations such as `reset_size`, `detach_contents`, or `add_contents` on the internal structure that keeps track of opened tables. The mutex synchronizes access to the list contents. When this wait event occurs with high frequency, it indicates a sudden change in the set of tables that were previously accessed. The engine needs to access new tables or let go of the context related to previously accessed tables.

synch/mutex/sql/LOCK_open

The number of tables that your sessions are opening exceeds the size of the table definition cache or the table open cache. Increase the size of these caches. For more information, see How MySQL opens and closes tables.

synch/mutex/sql/LOCK_table_cache

The number of tables that your sessions are opening exceeds the size of the table definition cache or the table open cache. Increase the size of these caches. For more information, see How MySQL opens and closes tables.

synch/mutex/sql/LOG

In this wait event, there are threads waiting on a log lock. For example, a thread might wait for a lock to write to the slow query log file.

synch/mutex/sql/MYSQL_BIN_LOG::LOCK_commit

In this wait event, there is a thread that is waiting to acquire a lock with the intention of committing to the binary log. Binary logging contention can occur on databases with a very high change rate. Depending on your version of MySQL, there are certain locks being used to protect the consistency and durability of the binary log. In RDS for MySQL, binary logs are used for replication and the automated backup process. In Aurora MySQL, binary logs are not needed for native replication or backups. They are disabled by default but can be enabled and used for external replication or change data capture. For more information, see The binary log in the MySQL documentation.

sync/mutex/sql/MYSQL_BIN_LOG::LOCK_dump_thread_metrics_collection

If binary logging is turned on, the engine acquires this mutex when it prints active dump threads metrics to the engine error log and to the internal operations map.

sync/mutex/sql/MYSQL_BIN_LOG::LOCK_inactive_binlogs_map

If binary logging is turned on, the engine acquires this mutex when it adds to, deletes from, or searches through the list of binlog files behind the latest one.

sync/mutex/sql/MYSQL_BIN_LOG::LOCK_io_cache

If binary logging is turned on, the engine acquires this mutex during Aurora binlog IO cache operations: allocate, resize, free, write, read, purge, and access cache info. If this event occurs frequently, the engine is accessing the cache where binlog events are stored. To reduce wait times, reduce commits. Try grouping multiple statements into a single transaction.

synch/mutex/sql/MYSQL_BIN_LOG::LOCK_log

You have turned on binary logging. There might be high commit throughput, many transactions committing, or replicas reading binlogs. Consider using multirow statements or bundling statements into one transaction. In Aurora, use global databases instead of binary log replication or use the `aurora_binlog_*` parameters.

synch/mutex/sql/SERVER_THREAD::LOCK_sync

The mutex `SERVER_THREAD::LOCK_sync` is acquired during the scheduling, processing, or launching of threads for file writes. The excessive occurrence of this wait event indicates increased write activity in the database.

synch/mutex/sql/TABLESPACES:lock

The engine acquires the `TABLESPACES:lock` mutex during the following tablespace operations: create, delete, truncate, and extend. The excessive occurrence of this wait event indicates a high frequency of tablespace operations. An example is loading a large amount of data into the database.

synch/rwlock/innodb/dict

In this wait event, there are threads waiting on an rwlock held on the InnoDB data dictionary.

synch/rwlock/innodb/dict_operation_lock

In this wait event, there are threads holding locks on InnoDB data dictionary operations.

synch/rwlock/innodb/dict sys RW lock

A high number of concurrent data control language statements (DCLs) in data definition language code (DDLs) are triggered at the same time. Reduce the application's dependency on DDLs during regular application activity.

synch/rwlock/innodb/index_tree_rw_lock

A large number of similar data manipulation language (DML) statements are accessing the same database object at the same time. Try using multirow statements. Also, spread the workload over different database objects. For example, implement partitioning.

synch/sxlock/innodb/dict_operation_lock

A high number of concurrent data control language statements (DCLs) in data definition language code (DDLs) are triggered at the same time. Reduce the application's dependency on DDLs during regular application activity.

synch/sxlock/innodb/dict_sys_lock

A high number of concurrent data control language statements (DCLs) in data definition language code (DDLs) are triggered at the same time. Reduce the application's dependency on DDLs during regular application activity.

synch/sxlock/innodb/hash_table_locks

The session couldn't find pages in the buffer pool. The engine either needs to read a file or modify the least-recently used (LRU) list for the buffer pool. Consider increasing the buffer cache size and improving access paths for the relevant queries.

synch/sxlock/innodb/index_tree_rw_lock

Many similar data manipulation language (DML) statements are accessing the same database object at the same time. Try using multirow statements. Also, spread the workload over different database objects. For example, implement partitioning.

synch/mutex/innodb/temp_pool_manager_mutex

This wait event occurs when a session is waiting to acquire a mutex for managing the pool of session temporary tablespaces.

For more information on troubleshooting synch wait events, see Why is my MySQL DB instance showing a high number of active sessions waiting on SYNCH wait events in Performance Insights?.

Aurora MySQL thread states

The following are some common thread states for Aurora MySQL.

checking permissions

The thread is checking whether the server has the required privileges to run the statement.

checking query cache for query

The server is checking whether the current query is present in the query cache.

cleaned up

This is the final state of a connection whose work is complete but which hasn't been closed by the client. The best solution is to explicitly close the connection in code. Or you can set a lower value for `wait_timeout` in your parameter group.

closing tables

The thread is flushing the changed table data to disk and closing the used tables. If this isn't a fast operation, verify the network bandwidth consumption metrics against the instance class network bandwidth. Also, check that the parameter values for `table_open_cache` and `table_definition_cache` parameter allow for enough tables to be simultaneously open so that the engine doesn't need to open and close tables frequently. These parameters influence the memory consumption on the instance.

converting HEAP to MyISAM

The query is converting a temporary table from in-memory to on-disk. This conversion is necessary because the temporary tables created by MySQL in the intermediate steps of query processing grew too big for memory. Check the values of `tmp_table_size` and `max_heap_table_size`. In later versions, this thread state name is `converting HEAP to ondisk`.

converting HEAP to ondisk

The thread is converting an internal temporary table from an in-memory table to an on-disk table.

copy to tmp table

The thread is processing an `ALTER TABLE` statement. This state occurs after the table with the new structure has been created but before rows are copied into it. For a thread in this state, you can use the Performance Schema to obtain information about the progress of the copy operation.

creating sort index

Aurora MySQL is performing a sort because it can't use an existing index to satisfy the `ORDER BY` or `GROUP BY` clause of a query. For more information, see creating sort index.

creating table

The thread is creating a permanent or temporary table.

delayed commit ok done

An asynchronous commit in Aurora MySQL has received an acknowledgement and is complete.

delayed commit ok initiated

The Aurora MySQL thread has started the async commit process but is waiting for acknowledgement. This is usually the genuine commit time of a transaction.

delayed send ok done

An Aurora MySQL worker thread that is tied to a connection can be freed while a response is sent to the client. The thread can begin other work. The state `delayed send ok` means that the asynchronous acknowledgement to the client completed.

delayed send ok initiated

An Aurora MySQL worker thread has sent a response asynchronously to a client and is now free to do work for other connections. The transaction has started an async commit process that hasn't yet been acknowledged.

executing

The thread has begun running a statement.

freeing items

The thread has run a command. Some freeing of items done during this state involves the query cache. This state is usually followed by cleaning up.

init

This state occurs before the initialization of `ALTER TABLE`, `DELETE`, `INSERT`, `SELECT`, or `UPDATE` statements. Actions in this state include flushing the binary log or InnoDB log, and some cleanup of the query cache.

Source has sent all binlog to replica; waiting for more updates

The primary node has finished its part of the replication. The thread is waiting for more queries to run so that it can write to the binary log (binlog).

opening tables

The thread is trying to open a table. This operation is fast unless an `ALTER TABLE` or a `LOCK TABLE` statement needs to finish, or it exceeds the value of `table_open_cache`.

optimizing

The server is performing initial optimizations for a query.

preparing

This state occurs during query optimization.

query end

This state occurs after processing a query but before the freeing items state.

removing duplicates

Aurora MySQL couldn't optimize a `DISTINCT` operation in the early stage of a query. Aurora MySQL must remove all duplicated rows before sending the result to the client.

searching rows for update

The thread is finding all matching rows before updating them. This stage is necessary if the `UPDATE` is changing the index that the engine uses to find the rows.

sending binlog event to slave

The thread read an event from the binary log and is sending it to the replica.

sending cached result to client

The server is taking the result of a query from the query cache and sending it to the client.

sending data

The thread is reading and processing rows for a `SELECT` statement but hasn't yet started sending data to the client. The process is identifying which pages contain the results necessary to satisfy the query. For more information, see sending data.

sending to client

The server is writing a packet to the client. In earlier MySQL versions, this wait event was labeled `writing to net`.

starting

This is the first stage at the beginning of statement execution.

statistics

The server is calculating statistics to develop a query execution plan. If a thread is in this state for a long time, the server is probably disk-bound while performing other work.

storing result in query cache

The server is storing the result of a query in the query cache.

system lock

The thread has called `mysql_lock_tables`, but the thread state hasn't been updated since the call. This general state occurs for many reasons.

update

The thread is preparing to start updating the table.

updating

The thread is searching for rows and is updating them.

user lock

The thread issued a `GET_LOCK` call. The thread either requested an advisory lock and is waiting for it, or is planning to request it.

waiting for more updates

The primary node has finished its part of the replication. The thread is waiting for more queries to run so that it can write to the binary log (binlog).

waiting for schema metadata lock

This is a wait for a metadata lock.

waiting for stored function metadata lock

This is a wait for a metadata lock.

waiting for stored procedure metadata lock

This is a wait for a metadata lock.

waiting for table flush

The thread is executing `FLUSH TABLES` and is waiting for all threads to close their tables. Or the thread received notification that the underlying structure for a table changed, so it must reopen the table to get the new structure. To reopen the table, the thread must wait until all other threads have closed the table. This notification takes place if another thread has used one of the following statements on the table: `FLUSH TABLES`, `ALTER TABLE`, `RENAME TABLE`, `REPAIR TABLE`, `ANALYZE TABLE`, or `OPTIMIZE TABLE`.

waiting for table level lock

One session is holding a lock on a table while another session tries to acquire the same lock on the same table.

waiting for table metadata lock

Aurora MySQL uses metadata locking to manage concurrent access to database objects and to ensure data consistency. In this wait event, one session is holding a metadata lock on a table while another session tries to acquire the same lock on the same table. When the Performance Schema is enabled, this thread state is reported as the wait event `synch/cond/sql/MDL_context::COND_wait_status`.

writing to net

The server is writing a packet to the network. In later MySQL versions, this wait event is labeled `Sending to client`.

Aurora MySQL isolation levels

Learn how DB instances in an Aurora MySQL cluster implement the database property of isolation. This topic explains how the Aurora MySQL default behavior balances between strict consistency and high performance. You can use this information to help you decide when to change the default settings based on the traits of your workload.

Available isolation levels for writer instances

You can use the isolation levels `REPEATABLE READ`, `READ COMMITTED`, `READ UNCOMMITTED`, and `SERIALIZABLE` on the primary instance of an Aurora MySQL DB cluster. These isolation levels work the same in Aurora MySQL as in RDS for MySQL.

REPEATABLE READ isolation level for reader instances

By default, Aurora MySQL DB instances that are configured as read-only Aurora Replicas always use the `REPEATABLE READ` isolation level. These DB instances ignore any `SET TRANSACTION ISOLATION LEVEL` statements and continue using the `REPEATABLE READ` isolation level.

READ COMMITTED isolation level for reader instances

If your application includes a write-intensive workload on the primary instance and long-running queries on the Aurora Replicas, you might experience substantial purge lag. *Purge lag* happens when internal garbage collection is blocked by long-running queries. The symptom that you see is a high value for `history list length` in the output from the `SHOW ENGINE INNODB STATUS` command. You can monitor this value using the `RollbackSegmentHistoryListLength` metric in CloudWatch. Substantial purge lag can reduce the effectiveness of secondary indexes, decrease overall query performance, and lead to wasted storage space.

If you experience such issues, you can set an Aurora MySQL session-level configuration setting, `aurora_read_replica_read_committed`, to use the `READ COMMITTED` isolation level on Aurora Replicas. When you apply this setting, you can help reduce slowdowns and wasted space that can result from performing long-running queries at the same time as transactions that modify your tables.

We recommend making sure that you understand the specific Aurora MySQL behavior of the READ COMMITTED isolation before using this setting. The Aurora Replica READ COMMITTED behavior complies with the ANSI SQL standard. However, the isolation is less strict than typical MySQL READ COMMITTED behavior that you might be familiar with. Therefore, you might see different query results under READ COMMITTED on an Aurora MySQL read replica than you might see for the same query under READ COMMITTED on the Aurora MySQL primary instance or on RDS for MySQL. You might consider using the aurora_read_replica_read_committed setting for such cases as a comprehensive report that scans a very large database. In contrast, you might avoid it for short queries with small result sets, where precision and repeatability are important.

The READ COMMITTED isolation level isn't available for sessions within a secondary cluster in an Aurora global database that use the write forwarding feature. For information about write forwarding, see Using write forwarding in an Amazon Aurora global database.

Using READ COMMITTED for readers

To use the READ COMMITTED isolation level for Aurora Replicas, set the aurora_read_replica_read_committed configuration setting to ON. Use this setting at the session level while connected to a specific Aurora Replica. To do so, run the following SQL commands.

```
set session aurora_read_replica_read_committed = ON;
set session transaction isolation level read committed;
```

You might use this configuration setting temporarily to perform interactive, one-time queries. You might also want to run a reporting or data analysis application that benefits from the READ COMMITTED isolation level, while leaving the default setting unchanged for other applications.

When the aurora_read_replica_read_committed setting is turned on, use the SET TRANSACTION ISOLATION LEVEL command to specify the isolation level for the appropriate transactions.

```
set transaction isolation level read committed;
```

Differences in READ COMMITTED behavior on Aurora replicas

The aurora_read_replica_read_committed setting makes the READ COMMITTED isolation level available for an Aurora Replica, with consistency behavior that is optimized for long-running transactions. The READ COMMITTED isolation level on Aurora Replicas has less strict isolation than

on Aurora primary instances. For that reason, enable this setting only on Aurora Replicas where you know that your queries can accept the possibility of certain types of inconsistent results.

Your queries can experience certain kinds of read anomalies when the `aurora_read_replica_read_committed` setting is turned on. Two kinds of anomalies are especially important to understand and handle in your application code. A *non-repeatable read* occurs when another transaction commits while your query is running. A long-running query can see different data at the start of the query than it sees at the end. A *phantom read* occurs when other transactions cause existing rows to be reorganized while your query is running, and one or more rows are read twice by your query.

Your queries might experience inconsistent row counts as a result of phantom reads. Your queries might also return incomplete or inconsistent results due to non-repeatable reads. For example, suppose that a join operation refers to tables that are concurrently modified by SQL statements such as `INSERT` or `DELETE`. In this case, the join query might read a row from one table but not the corresponding row from another table.

The ANSI SQL standard allows both of these behaviors for the `READ COMMITTED` isolation level. However, those behaviors are different than the typical MySQL implementation of `READ COMMITTED`. Thus, before enabling the `aurora_read_replica_read_committed` setting, check any existing SQL code to verify if it operates as expected under the looser consistency model.

Row counts and other results might not be strongly consistent under the `READ COMMITTED` isolation level while this setting is enabled. Thus, you typically enable the setting only while running analytic queries that aggregate large amounts of data and don't require absolute precision. If you don't have these kinds of long-running queries alongside a write-intensive workload, you probably don't need the `aurora_read_replica_read_committed` setting. Without the combination of long-running queries and a write-intensive workload, you're unlikely to encounter issues with the length of the history list.

Example Queries showing isolation behavior for READ COMMITTED on Aurora Replicas

The following example shows how `READ COMMITTED` queries on an Aurora Replica might return non-repeatable results if transactions modify the associated tables at the same time. The table `BIG_TABLE` contains 1 million rows before any queries start. Other data manipulation language (DML) statements add, remove, or change rows while they are running.

The queries on the Aurora primary instance under the `READ COMMITTED` isolation level produce predictable results. However, the overhead of keeping the consistent read view for the lifetime of every long-running query can lead to expensive garbage collection later.

The queries on the Aurora Replica under the `READ COMMITTED` isolation level are optimized to minimize this garbage collection overhead. The tradeoff is that the results might vary depending on whether the queries retrieve rows that are added, removed, or reorganized by transactions that are committed while the query is running. The queries are allowed to consider these rows, but aren't required to. For demonstration purposes, the queries check only the number of rows in the table by using the `COUNT(*)` function.

Time	DML statement on Aurora primary instance	Query on Aurora primary instance with READ COMMITTED	Query on Aurora Replica with READ COMMITTED
T1	`INSERT INTO big_table SELECT * FROM other_table LIMIT 1000000; COMMIT;`		
T2		**Q1:** `SELECT COUNT(*) FROM big_table;`	**Q2:** `SELECT COUNT(*) FROM big_table;`
T3	`INSERT INTO big_table (c1, c2) VALUES (1, 'one more row'); COMMIT;`		
T4		If Q1 finishes now, result is 1,000,000.	If Q2 finishes now, result is 1,000,000 or 1,000,001.
T5	`DELETE FROM big_table LIMIT 2; COMMIT;`		
T6		If Q1 finishes now, result is 1,000,000.	If Q2 finishes now, result is 1,000,000 or

Time	DML statement on Aurora primary instance	Query on Aurora primary instance with READ COMMITTED	Query on Aurora Replica with READ COMMITTED
			1,000,001 or 999,999 or 999,998.
T7	`UPDATE big_table SET c2 = CONCAT(c2 ,c2,c2); COMMIT;`		
T8		If Q1 finishes now, result is 1,000,000.	If Q2 finishes now, result is 1,000,000 or 1,000,001 or 999,999, or possibly some higher number.
T9		**Q3:** `SELECT COUNT(*) FROM big_table;`	**Q4:** `SELECT COUNT(*) FROM big_table;`
T10		If Q3 finishes now, result is 999,999.	If Q4 finishes now, result is 999,999.
T11		**Q5:** `SELECT COUNT(*) FROM parent_table p JOIN child_tab le c ON (p.id = c.id) WHERE p.id = 1000;`	**Q6:** `SELECT COUNT(*) FROM parent_table p JOIN child_tab le c ON (p.id = c.id) WHERE p.id = 1000;`

Time	DML statement on Aurora primary instance	Query on Aurora primary instance with READ COMMITTED	Query on Aurora Replica with READ COMMITTED
T12	`INSERT INTO parent_table (id, s) VALUES (1000, 'hello'); INSERT INTO child_table (id, s) VALUES (1000, 'world'); COMMIT;`		
T13		If Q5 finishes now, result is 0.	If Q6 finishes now, result is 0 or 1.

If the queries finish quickly, before any other transactions perform DML statements and commit, the results are predictable and the same between the primary instance and the Aurora Replica. Let's examine the differences in behavior in detail, starting with the first query.

The results for Q1 are highly predictable because `READ COMMITTED` on the primary instance uses a strong consistency model similar to the `REPEATABLE READ` isolation level.

The results for Q2 might vary depending on what transactions are committed while that query is running. For example, suppose that other transactions perform DML statements and commit while the queries are running. In this case, the query on the Aurora Replica with the `READ COMMITTED` isolation level might or might not take the changes into account. The row counts aren't predictable in the same way as under the `REPEATABLE READ` isolation level. They also aren't as predictable as queries running under the `READ COMMITTED` isolation level on the primary instance, or on an RDS for MySQL instance.

The `UPDATE` statement at T7 doesn't actually change the number of rows in the table. However, by changing the length of a variable-length column, this statement can cause rows to be reorganized internally. A long-running `READ COMMITTED` transaction might see the old version of a row, and

later within the same query see the new version of the same row. The query can also skip both the old and new versions of the row, so the row count might be different than expected.

The results of Q5 and Q6 might be identical or slightly different. Query Q6 on the Aurora Replica under `READ COMMITTED` is able to see, but is not required to see, the new rows that are committed while the query is running. It might also see the row from one table, but not from the other table. If the join query doesn't find a matching row in both tables, it returns a count of zero. If the query does find both the new rows in `PARENT_TABLE` and `CHILD_TABLE`, the query returns a count of one. In a long-running query, the lookups from the joined tables might happen at widely separated times.

> **Note**
>
> These differences in behavior depend on the timing of when transactions are committed and when the queries process the underlying table rows. Thus, you're most likely to see such differences in report queries that take minutes or hours and that run on Aurora clusters processing OLTP transactions at the same time. These are the kinds of mixed workloads that benefit the most from the `READ COMMITTED` isolation level on Aurora Replicas.

Aurora MySQL hints

You can use SQL hints with Aurora MySQL queries to fine-tune performance. You can also use hints to prevent execution plans for important queries from changing because of unpredictable conditions.

> **Tip**
>
> To verify the effect that a hint has on a query, examine the query plan produced by the `EXPLAIN` statement. Compare the query plans with and without the hint.

In Aurora MySQL version 3, you can use all the hints that are available in MySQL Community Edition 8.0. For more information about these hints, see Optimizer Hints in the *MySQL Reference Manual*.

In Aurora MySQL version 8.4, you can use all the hints that are available in MySQL Community Edition 8.4. For more information about these hints, see Optimizer Hints in the *MySQL Reference Manual*.

The following hints are available in Aurora MySQL version 2. These hints apply to queries that use the hash join feature in Aurora MySQL version 2, especially queries that use parallel query optimization.

PQ, NO_PQ

Specifies whether to force the optimizer to use parallel query on a per-table or per-query basis.

PQ forces the optimizer to use parallel query for specified tables or the whole query (block). NO_PQ prevents the optimizer from using parallel query for specified tables or the whole query (block).

This hint is available in Aurora MySQL version 2.11 and higher. The following examples show you how to use this hint.

> **Note**
>
> Specifying a table name forces the optimizer to apply the PQ/NO_PQ hint only on those select tables. Not specifying a table name forces the PQ/NO_PQ hint on all tables affected by the query block.

```
EXPLAIN SELECT /*+ PQ() */ f1, f2
    FROM num1 t1 WHERE f1 > 10 and f2 < 100;

EXPLAIN SELECT /*+ PQ(t1) */ f1, f2
    FROM num1 t1 WHERE f1 > 10 and f2 < 100;

EXPLAIN SELECT /*+ PQ(t1,t2) */ f1, f2
    FROM num1 t1, num1 t2 WHERE t1.f1 = t2.f21;

EXPLAIN SELECT /*+ NO_PQ() */ f1, f2
    FROM num1 t1 WHERE f1 > 10 and f2 < 100;

EXPLAIN SELECT /*+ NO_PQ(t1) */ f1, f2
    FROM num1 t1 WHERE f1 > 10 and f2 < 100;
```

```
EXPLAIN SELECT /*+ NO_PQ(t1,t2) */ f1, f2
    FROM num1 t1, num1 t2 WHERE t1.f1 = t2.f21;
```

HASH_JOIN, NO_HASH_JOIN

Turns on or off the ability of the parallel query optimizer to choose whether to use the hash join optimization method for a query. `HASH_JOIN` lets the optimizer use hash join if that mechanism is more efficient. `NO_HASH_JOIN` prevents the optimizer from using hash join for the query. This hint is available in Aurora MySQL version 2.08 and higher. It has no effect in Aurora MySQL version 3.

The following examples show you how to use this hint.

```
EXPLAIN SELECT/*+ HASH_JOIN(t2) */ f1, f2
  FROM t1, t2 WHERE t1.f1 = t2.f1;

EXPLAIN SELECT /*+ NO_HASH_JOIN(t2) */ f1, f2
  FROM t1, t2 WHERE t1.f1 = t2.f1;
```

HASH_JOIN_PROBING, NO_HASH_JOIN_PROBING

In a hash join query, specifies whether to use the specified table for the probe side of the join. The query tests if column values from the build table exist in the probe table, instead of reading the entire contents of the probe table. You can use `HASH_JOIN_PROBING` and `HASH_JOIN_BUILDING` to specify how hash join queries are processed without reordering the tables within the query text. This hint is available in Aurora MySQL version 2.08 and higher. It has no effect in Aurora MySQL version 3.

The following examples show how to use this hint. Specifying the `HASH_JOIN_PROBING` hint for the table `T2` has the same effect as specifying `NO_HASH_JOIN_PROBING` for the table `T1`.

```
EXPLAIN SELECT /*+ HASH_JOIN(t2) HASH_JOIN_PROBING(t2) */ f1, f2
  FROM t1, t2 WHERE t1.f1 = t2.f1;

EXPLAIN SELECT /*+ HASH_JOIN(t2) NO_HASH_JOIN_PROBING(t1) */ f1, f2
  FROM t1, t2 WHERE t1.f1 = t2.f1;
```

HASH_JOIN_BUILDING, NO_HASH_JOIN_BUILDING

In a hash join query, specifies whether to use the specified table for the build side of the join. The query processes all the rows from this table to build the list of column values to cross-

reference with the other table. You can use HASH_JOIN_PROBING and HASH_JOIN_BUILDING to specify how hash join queries are processed without reordering the tables within the query text. This hint is available in Aurora MySQL version 2.08 and higher. It has no effect in Aurora MySQL version 3.

The following example shows you how to use this hint. Specifying the HASH_JOIN_BUILDING hint for the table T2 has the same effect as specifying NO_HASH_JOIN_BUILDING for the table T1.

```
EXPLAIN SELECT /*+ HASH_JOIN(t2) HASH_JOIN_BUILDING(t2) */ f1, f2
  FROM t1, t2 WHERE t1.f1 = t2.f1;

EXPLAIN SELECT /*+ HASH_JOIN(t2) NO_HASH_JOIN_BUILDING(t1) */ f1, f2
  FROM t1, t2 WHERE t1.f1 = t2.f1;
```

JOIN_FIXED_ORDER

Specifies that tables in the query are joined based on the order they are listed in the query. It is useful with queries involving three or more tables. It is intended as a replacement for the MySQL STRAIGHT_JOIN hint and is equivalent to the MySQL JOIN_FIXED_ORDER hint. This hint is available in Aurora MySQL version 2.08 and higher.

The following example shows you how to use this hint.

```
EXPLAIN SELECT /*+ JOIN_FIXED_ORDER() */ f1, f2
  FROM t1 JOIN t2 USING (id) JOIN t3 USING (id) JOIN t4 USING (id);
```

JOIN_ORDER

Specifies the join order for the tables in the query. It is useful with queries involving three or more tables. It is equivalent to the MySQL JOIN_ORDER hint. This hint is available in Aurora MySQL version 2.08 and higher.

The following example shows you how to use this hint.

```
EXPLAIN SELECT /*+ JOIN_ORDER (t4, t2, t1, t3) */ f1, f2
  FROM t1 JOIN t2 USING (id) JOIN t3 USING (id) JOIN t4 USING (id);
```

JOIN_PREFIX

Specifies the tables to put first in the join order. It is useful with queries involving three or more tables. It is equivalent to the MySQL JOIN_PREFIX hint. This hint is available in Aurora MySQL version 2.08 and higher.

The following example shows you how to use this hint.

```
EXPLAIN SELECT /*+ JOIN_PREFIX (t4, t2) */ f1, f2
  FROM t1 JOIN t2 USING (id) JOIN t3 USING (id) JOIN t4 USING (id);
```

JOIN_SUFFIX

Specifies the tables to put last in the join order. It is useful with queries involving three or more tables. It is equivalent to the MySQL JOIN_SUFFIX hint. This hint is available in Aurora MySQL version 2.08 and higher.

The following example shows you how to use this hint.

```
EXPLAIN SELECT /*+ JOIN_SUFFIX (t1) */ f1, f2
  FROM t1 JOIN t2 USING (id) JOIN t3 USING (id) JOIN t4 USING (id);
```

For information about using hash join queries, see Optimizing large Aurora MySQL join queries with hash joins.

Aurora MySQL stored procedure reference

You can manage your Aurora MySQL DB cluster by calling built-in stored procedures.

Topics

- Collecting and maintaining the Global Status History
- Configuring, starting, and stopping binary log (binlog) replication
- Managing multi-source replication
- Ending a session or query
- Replicating transactions using GTIDs
- Rotating the query logs
- Setting and showing binary log configuration

Collecting and maintaining the Global Status History

Amazon RDS provides a set of procedures that take snapshots of the values of status variables over time and write them to a table, along with any changes since the last snapshot. This infrastructure is called Global Status History. For more information, see Managing the Global Status History.

The following stored procedures manage how the Global Status History is collected and maintained.

Topics

- mysql.rds_collect_global_status_history
- mysql.rds_disable_gsh_collector
- mysql.rds_disable_gsh_rotation
- mysql.rds_enable_gsh_collector
- mysql.rds_enable_gsh_rotation
- mysql.rds_rotate_global_status_history
- mysql.rds_set_gsh_collector
- mysql.rds_set_gsh_rotation

mysql.rds_collect_global_status_history

Takes a snapshot on demand for the Global Status History.

Syntax

```
CALL mysql.rds_collect_global_status_history;
```

mysql.rds_disable_gsh_collector

Turns off snapshots taken by the Global Status History.

Syntax

```
CALL mysql.rds_disable_gsh_collector;
```

mysql.rds_disable_gsh_rotation

Turns off rotation of the `mysql.global_status_history` table.

Syntax

```
CALL mysql.rds_disable_gsh_rotation;
```

mysql.rds_enable_gsh_collector

Turns on the Global Status History to take default snapshots at intervals specified by `rds_set_gsh_collector`.

Syntax

```
CALL mysql.rds_enable_gsh_collector;
```

mysql.rds_enable_gsh_rotation

Turns on rotation of the contents of the `mysql.global_status_history` table to `mysql.global_status_history_old` at intervals specified by `rds_set_gsh_rotation`.

Syntax

```
CALL mysql.rds_enable_gsh_rotation;
```

mysql.rds_rotate_global_status_history

Rotates the contents of the `mysql.global_status_history` table to `mysql.global_status_history_old` on demand.

Syntax

```
CALL mysql.rds_rotate_global_status_history;
```

mysql.rds_set_gsh_collector

Specifies the interval, in minutes, between snapshots taken by the Global Status History.

Syntax

```
CALL mysql.rds_set_gsh_collector(intervalPeriod);
```

Parameters

intervalPeriod

The interval, in minutes, between snapshots. Default value is 5.

mysql.rds_set_gsh_rotation

Specifies the interval, in days, between rotations of the `mysql.global_status_history` table.

Syntax

```
CALL mysql.rds_set_gsh_rotation(intervalPeriod);
```

Parameters

intervalPeriod

The interval, in days, between table rotations. Default value is 7.

Configuring, starting, and stopping binary log (binlog) replication

You can call the following stored procedures while connected to the primary instance in an Aurora MySQL cluster. These procedures control how transactions are replicated from an external database into Aurora MySQL, or from Aurora MySQL to an external database.

Topics

- mysql.rds_disable_session_binlog (Aurora MySQL version 2)
- mysql.rds_enable_session_binlog (Aurora MySQL version 2)
- mysql.rds_import_binlog_ssl_material
- mysql.rds_next_master_log (Aurora MySQL version 2)
- mysql.rds_next_source_log (Aurora MySQL version 3)
- mysql.rds_remove_binlog_ssl_material
- mysql.rds_reset_external_master (Aurora MySQL version 2)
- mysql.rds_reset_external_source (Aurora MySQL version 3)
- mysql.rds_set_binlog_source_ssl (Aurora MySQL version 3)
- mysql.rds_set_external_master (Aurora MySQL version 2)
- mysql.rds_set_external_source (Aurora MySQL version 3)
- mysql.rds_set_external_master_with_auto_position (Aurora MySQL version 2)
- mysql.rds_set_external_source_with_auto_position (Aurora MySQL version 3)
- mysql.rds_set_external_source_with_delay (Aurora MySQL version 8.4.8 and higher)
- mysql.rds_set_master_auto_position (Aurora MySQL version 2)
- mysql.rds_set_read_only (Aurora MySQL version 3)
- mysql.rds_set_session_binlog_format (Aurora MySQL version 2)
- mysql.rds_set_source_auto_position (Aurora MySQL version 3)
- mysql.rds_set_source_delay (Aurora MySQL version 8.4.8 and higher)
- mysql.rds_skip_repl_error
- mysql.rds_start_replication
- mysql.rds_start_replication_until(Aurora MySQL version 3)
- mysql.rds_stop_replication

mysql.rds_disable_session_binlog (Aurora MySQL version 2)

Turns off binary logging for the current session by setting the `sql_log_bin` variable to `OFF`.

Syntax

```
CALL mysql.rds_disable_session_binlog;
```

Parameters

None

Usage notes

For an Aurora MySQL DB cluster, you call this stored procedure while connected to the primary instance.

For Aurora, this procedure is supported for Aurora MySQL version 2.12 and higher MySQL 5.7–compatible versions.

> **Note**
>
> In Aurora MySQL version 3, you can use the following command to disable binary logging for the current session if you have the `SESSION_VARIABLES_ADMIN` privilege:
>
> ```
> SET SESSION sql_log_bin = OFF;
> ```

mysql.rds_enable_session_binlog (Aurora MySQL version 2)

Turns on binary logging for the current session by setting the `sql_log_bin` variable to `ON`.

Syntax

```
CALL mysql.rds_enable_session_binlog;
```

Parameters

None

Usage notes

For an Aurora MySQL DB cluster, you call this stored procedure while connected to the primary instance.

For Aurora, this procedure is supported for Aurora MySQL version 2.12 and higher MySQL 5.7–compatible versions.

> **Note**
>
> In Aurora MySQL version 3, you can use the following command to enable binary logging for the current session if you have the `SESSION_VARIABLES_ADMIN` privilege:
>
> ```
> SET SESSION sql_log_bin = ON;
> ```

mysql.rds_import_binlog_ssl_material

Imports the certificate authority certificate, client certificate, and client key into an Aurora MySQL DB cluster. The information is required for SSL communication and encrypted replication.

> **Note**
>
> Currently, this procedure is supported for Aurora MySQL version 2: 2.09.2, 2.10.0, 2.10.1, and 2.11.0; and version 3: 3.01.1 and higher.

Syntax

```
CALL mysql.rds_import_binlog_ssl_material (
  ssl_material
);
```

Parameters

ssl_material

JSON payload that contains the contents of the following .pem format files for a MySQL client:

- "ssl_ca":"*Certificate authority certificate*"

- "ssl_cert":"*Client certificate*"
- "ssl_key":"*Client key*"

Usage notes

Prepare for encrypted replication before you run this procedure:

- If you don't have SSL enabled on the external MySQL source database instance and don't have a client key and client certificate prepared, enable SSL on the MySQL database server and generate the required client key and client certificate.
- If SSL is enabled on the external source database instance, supply a client key and certificate for the Aurora MySQL DB cluster. If you don't have these, generate a new key and certificate for the Aurora MySQL DB cluster. To sign the client certificate, you must have the certificate authority key you used to configure SSL on the external MySQL source database instance.

For more information, see Creating SSL certificates and keys using openssl in the MySQL documentation.

> **Important**
>
> After you prepare for encrypted replication, use an SSL connection to run this procedure. The client key must not be transferred across an insecure connection.

This procedure imports SSL information from an external MySQL database into an Aurora MySQL DB cluster. The SSL information is in .pem format files that contain the SSL information for the Aurora MySQL DB cluster. During encrypted replication, the Aurora MySQL DB cluster acts a client to the MySQL database server. The certificates and keys for the Aurora MySQL client are in files in .pem format.

You can copy the information from these files into the `ssl_material` parameter in the correct JSON payload. To support encrypted replication, import this SSL information into the Aurora MySQL DB cluster.

The JSON payload must be in the following format.

```
'{"ssl_ca":"-----BEGIN CERTIFICATE-----
```

```
ssl_ca_pem_body_code
-----END CERTIFICATE-----\n","ssl_cert":"-----BEGIN CERTIFICATE-----
ssl_cert_pem_body_code
-----END CERTIFICATE-----\n","ssl_key":"-----BEGIN RSA PRIVATE KEY-----
ssl_key_pem_body_code
-----END RSA PRIVATE KEY-----\n"}'
```

Examples

The following example imports SSL information into an Aurora MySQL. In .pem format files, the body code typically is longer than the body code shown in the example.

```
call mysql.rds_import_binlog_ssl_material(
'{"ssl_ca":"-----BEGIN CERTIFICATE-----
AAAAB3NzaC1yc2EAAAADAQABAAABAQClKsfkNkuSevGj3eYhCe53pcjqP3maAhDFcvBS7O6V
hz2ItxCih+PnDSUaw+WNQn/mZphTk/a/gU8jEzoOWbkM4yxyb/wB96xbiFveSFJuOp/d6RJhJOI0iBXr
lsLnBItntckiJ7FbtxJMXLvvwJryDUilBMTjYtwB+QhYXUMOzce5Pjz5/i8SeJtjnV3iAoG/cQk+0FzZ
qaeJAAHco+CY/5WrUBkrHmFJr6HcXkvJdWPkYQS3xqC0+FmUZofz221CBt5IMucxXPkX4rWi+z7wB3Rb
BQoQzd8v7yeb7OzlPnWOyN0qFU0XA246RA8QFYiCNYwI3f05p6KLxEXAMPLE
-----END CERTIFICATE-----\n","ssl_cert":"-----BEGIN CERTIFICATE-----
AAAAB3NzaC1yc2EAAAADAQABAAABAQClKsfkNkuSevGj3eYhCe53pcjqP3maAhDFcvBS7O6V
hz2ItxCih+PnDSUaw+WNQn/mZphTk/a/gU8jEzoOWbkM4yxyb/wB96xbiFveSFJuOp/d6RJhJOI0iBXr
lsLnBItntckiJ7FbtxJMXLvvwJryDUilBMTjYtwB+QhYXUMOzce5Pjz5/i8SeJtjnV3iAoG/cQk+0FzZ
qaeJAAHco+CY/5WrUBkrHmFJr6HcXkvJdWPkYQS3xqC0+FmUZofz221CBt5IMucxXPkX4rWi+z7wB3Rb
BQoQzd8v7yeb7OzlPnWOyN0qFU0XA246RA8QFYiCNYwI3f05p6KLxEXAMPLE
-----END CERTIFICATE-----\n","ssl_key":"-----BEGIN RSA PRIVATE KEY-----
AAAAB3NzaC1yc2EAAAADAQABAAABAQClKsfkNkuSevGj3eYhCe53pcjqP3maAhDFcvBS7O6V
hz2ItxCih+PnDSUaw+WNQn/mZphTk/a/gU8jEzoOWbkM4yxyb/wB96xbiFveSFJuOp/d6RJhJOI0iBXr
lsLnBItntckiJ7FbtxJMXLvvwJryDUilBMTjYtwB+QhYXUMOzce5Pjz5/i8SeJtjnV3iAoG/cQk+0FzZ
qaeJAAHco+CY/5WrUBkrHmFJr6HcXkvJdWPkYQS3xqC0+FmUZofz221CBt5IMucxXPkX4rWi+z7wB3Rb
BQoQzd8v7yeb7OzlPnWOyN0qFU0XA246RA8QFYiCNYwI3f05p6KLxEXAMPLE
-----END RSA PRIVATE KEY-----\n"}');
```

mysql.rds_next_master_log (Aurora MySQL version 2)

Changes the source database instance log position to the start of the next binary log on the source database instance. Use this procedure only if you are receiving replication I/O error 1236 on a read replica.

Syntax

```
CALL mysql.rds_next_master_log(
curr_master_log
);
```

Parameters

curr_master_log

The index of the current master log file. For example, if the current file is named `mysql-bin-changelog.012345`, then the index is 12345. To determine the current master log file name, run the `SHOW REPLICA STATUS` command and view the `Master_Log_File` field.

Usage notes

The master user must run the `mysql.rds_next_master_log` procedure.

Warning

Call `mysql.rds_next_master_log` only if replication fails after a failover of a Multi-AZ DB instance that is the replication source, and the `Last_IO_Errno` field of `SHOW REPLICA STATUS` reports I/O error 1236.
Calling `mysql.rds_next_master_log` can result in data loss in the read replica if transactions in the source instance were not written to the binary log on disk before the failover event occurred.

Examples

Assume replication fails on an Aurora MySQL read replica. Running `SHOW REPLICA STATUS\G` on the read replica returns the following result:

```
*************************** 1. row ***************************
             Replica_IO_State:
                  Source_Host: myhost.XXXXXXXXXXXXXX.rr-rrrr-1.rds.amazonaws.com
                  Source_User: MasterUser
                  Source_Port: 3306
                Connect_Retry: 10
              Source_Log_File: mysql-bin-changelog.012345
          Read_Source_Log_Pos: 1219393
```

```
               Relay_Log_File: relaylog.012340
                Relay_Log_Pos: 30223388
        Relay_Source_Log_File: mysql-bin-changelog.012345
           Replica_IO_Running: No
          Replica_SQL_Running: Yes
              Replicate_Do_DB:
          Replicate_Ignore_DB:
           Replicate_Do_Table:
       Replicate_Ignore_Table:
      Replicate_Wild_Do_Table:
  Replicate_Wild_Ignore_Table:
                   Last_Errno: 0
                   Last_Error:
                 Skip_Counter: 0
          Exec_Source_Log_Pos: 30223232
              Relay_Log_Space: 5248928866
              Until_Condition: None
               Until_Log_File:
                Until_Log_Pos: 0
           Source_SSL_Allowed: No
           Source_SSL_CA_File:
           Source_SSL_CA_Path:
              Source_SSL_Cert:
            Source_SSL_Cipher:
               Source_SSL_Key:
        Seconds_Behind_Master: NULL
Source_SSL_Verify_Server_Cert: No
                Last_IO_Errno: 1236
                Last_IO_Error: Got fatal error 1236 from master when reading data from
 binary log: 'Client requested master to start replication from impossible position;
 the first event 'mysql-bin-changelog.013406' at 1219393, the last event read from
 '/rdsdbdata/log/binlog/mysql-bin-changelog.012345' at 4, the last byte read from '/
rdsdbdata/log/binlog/mysql-bin-changelog.012345' at 4.'
               Last_SQL_Errno: 0
               Last_SQL_Error:
  Replicate_Ignore_Server_Ids:
             Source_Server_Id: 67285976
```

The `Last_IO_Errno` field shows that the instance is receiving I/O error 1236. The `Master_Log_File` field shows that the file name is `mysql-bin-changelog.012345`, which means that the log file index is `12345`. To resolve the error, you can call `mysql.rds_next_master_log` with the following parameter:

```
CALL mysql.rds_next_master_log(12345);
```

mysql.rds_next_source_log (Aurora MySQL version 3)

Changes the source database instance log position to the start of the next binary log on the source database instance. Use this procedure only if you are receiving replication I/O error 1236 on a read replica.

Syntax

```
CALL mysql.rds_next_source_log(
curr_source_log
);
```

Parameters

curr_source_log

The index of the current source log file. For example, if the current file is named `mysql-bin-changelog.012345`, then the index is 12345. To determine the current source log file name, run the `SHOW REPLICA STATUS` command and view the `Source_Log_File` field.

Usage notes

The administrative user must run the `mysql.rds_next_source_log` procedure.

Warning

Call `mysql.rds_next_source_log` only if replication fails after a failover of a Multi-AZ DB instance that is the replication source, and the `Last_IO_Errno` field of `SHOW REPLICA STATUS` reports I/O error 1236.
Calling `mysql.rds_next_source_log` can result in data loss in the read replica if transactions in the source instance were not written to the binary log on disk before the failover event occurred. You can reduce the chance of this happening by setting the source instance parameters `sync_binlog` and `innodb_support_xa` to 1, even though this might reduce performance.

Examples

Assume replication fails on an Aurora MySQL read replica. Running `SHOW REPLICA STATUS\G` on the read replica returns the following result:

```
*************************** 1. row ***************************
             Replica_IO_State:
                  Source_Host: myhost.XXXXXXXXXXXXXX.rr-rrrr-1.rds.amazonaws.com
                  Source_User: MasterUser
                  Source_Port: 3306
                Connect_Retry: 10
              Source_Log_File: mysql-bin-changelog.012345
          Read_Source_Log_Pos: 1219393
               Relay_Log_File: relaylog.012340
                Relay_Log_Pos: 30223388
        Relay_Source_Log_File: mysql-bin-changelog.012345
           Replica_IO_Running: No
          Replica_SQL_Running: Yes
              Replicate_Do_DB:
          Replicate_Ignore_DB:
           Replicate_Do_Table:
       Replicate_Ignore_Table:
      Replicate_Wild_Do_Table:
  Replicate_Wild_Ignore_Table:
                   Last_Errno: 0
                   Last_Error:
                 Skip_Counter: 0
          Exec_Source_Log_Pos: 30223232
              Relay_Log_Space: 5248928866
              Until_Condition: None
               Until_Log_File:
                Until_Log_Pos: 0
           Source_SSL_Allowed: No
           Source_SSL_CA_File:
           Source_SSL_CA_Path:
              Source_SSL_Cert:
            Source_SSL_Cipher:
               Source_SSL_Key:
        Seconds_Behind_Source: NULL
Source_SSL_Verify_Server_Cert: No
                Last_IO_Errno: 1236
                Last_IO_Error: Got fatal error 1236 from source when reading data from
 binary log: 'Client requested source to start replication from impossible position;
 the first event 'mysql-bin-changelog.013406' at 1219393, the last event read from
```

```
 '/rdsdbdata/log/binlog/mysql-bin-changelog.012345' at 4, the last byte read from '/
rdsdbdata/log/binlog/mysql-bin-changelog.012345' at 4.'
               Last_SQL_Errno: 0
               Last_SQL_Error:
  Replicate_Ignore_Server_Ids:
             Source_Server_Id: 67285976
```

The `Last_IO_Errno` field shows that the instance is receiving I/O error 1236. The `Source_Log_File` field shows that the file name is `mysql-bin-changelog.012345`, which means that the log file index is `12345`. To resolve the error, you can call `mysql.rds_next_source_log` with the following parameter:

```
CALL mysql.rds_next_source_log(12345);
```

mysql.rds_remove_binlog_ssl_material

Removes the certificate authority certificate, client certificate, and client key for SSL communication and encrypted replication. This information is imported by using mysql.rds_import_binlog_ssl_material.

Syntax

```
CALL mysql.rds_remove_binlog_ssl_material;
```

mysql.rds_reset_external_master (Aurora MySQL version 2)

Reconfigures an Aurora MySQL DB instance to no longer be a read replica of an instance of MySQL running external to Amazon RDS.

> **Important**
>
> To run this procedure, `autocommit` must be enabled. To enable it, set the `autocommit` parameter to 1. For information about modifying parameters, see Modifying parameters in a DB parameter group in Amazon Aurora.

Syntax

```
CALL mysql.rds_reset_external_master;
```

Usage notes

The master user must run the `mysql.rds_reset_external_master` procedure. This procedure must be run on the MySQL DB instance to be removed as a read replica of a MySQL instance running external to Amazon RDS.

> **Note**
>
> We offer these stored procedures primarily to enable replication with MySQL instances running external to Amazon RDS. We recommend that you use Aurora Replicas to manage replication within an Aurora MySQL DB cluster when possible. For information about managing replication in Aurora MySQL DB clusters, see Using Aurora Replicas.

For more information about using replication to import data from an instance of MySQL running external to Aurora MySQL, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

mysql.rds_reset_external_source (Aurora MySQL version 3)

Reconfigures an Aurora MySQL DB instance to no longer be a read replica of an instance of MySQL running external to Amazon RDS.

> **Important**
>
> To run this procedure, `autocommit` must be enabled. To enable it, set the `autocommit` parameter to 1. For information about modifying parameters, see Modifying parameters in a DB parameter group in Amazon Aurora.

Syntax

```
CALL mysql.rds_reset_external_source;
```

Usage notes

The administrative user must run the `mysql.rds_reset_external_source` procedure. This procedure must be run on the MySQL DB instance to be removed as a read replica of a MySQL instance running external to Amazon RDS.

> **Note**
>
> We offer these stored procedures primarily to enable replication with MySQL instances running external to Amazon RDS. We recommend that you use Aurora Replicas to manage replication within an Aurora MySQL DB cluster when possible. For information about managing replication in Aurora MySQL DB clusters, see Using Aurora Replicas.

mysql.rds_set_binlog_source_ssl (Aurora MySQL version 3)

Enables SOURCE_SSL encryption for binlog replication. For more information, see CHANGE REPLICATION SOURCE TO statement in the MySQL documentation.

Syntax

```
CALL mysql.rds_set_binlog_source_ssl(mode);
```

Parameters

mode

A value that indicates whether SOURCE_SSL encryption is enabled:

- 0 – SOURCE_SSL encryption is disabled. The default is 0.
- 1 – SOURCE_SSL encryption is enabled. You can configure encryption using SSL or TLS.

Usage notes

This procedure is supported for Aurora MySQL version 3.06 and higher.

mysql.rds_set_external_master (Aurora MySQL version 2)

Configures an Aurora MySQL DB instance to be a read replica of an instance of MySQL running external to Amazon RDS.

The `mysql.rds_set_external_master` procedure is deprecated and will be removed in a future release. Use `mysql.rds_set_external_source` instead.

Important

To run this procedure, `autocommit` must be enabled. To enable it, set the `autocommit` parameter to 1. For information about modifying parameters, see Modifying parameters in a DB parameter group in Amazon Aurora.

Syntax

```
CALL mysql.rds_set_external_master (
  host_name
  , host_port
  , replication_user_name
  , replication_user_password
  , mysql_binary_log_file_name
  , mysql_binary_log_file_location
  , ssl_encryption
);
```

Parameters

host_name

The host name or IP address of the MySQL instance running external to Amazon RDS to become the source database instance.

host_port

The port used by the MySQL instance running external to Amazon RDS to be configured as the source database instance. If your network configuration includes Secure Shell (SSH) port replication that converts the port number, specify the port number that is exposed by SSH.

replication_user_name

The ID of a user with `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the MySQL instance running external to Amazon RDS. We recommend that you provide an account that is used solely for replication with the external instance.

replication_user_password

The password of the user ID specified in `replication_user_name`.

mysql_binary_log_file_name

The name of the binary log on the source database instance that contains the replication information.

mysql_binary_log_file_location

The location in the mysql_binary_log_file_name binary log at which replication starts reading the replication information.

You can determine the binlog file name and location by running SHOW MASTER STATUS on the source database instance.

ssl_encryption

A value that specifies whether Secure Socket Layer (SSL) encryption is used on the replication connection. 1 specifies to use SSL encryption, 0 specifies to not use encryption. The default is 0.

> **Note**
>
> The MASTER_SSL_VERIFY_SERVER_CERT option isn't supported. This option is set to 0, which means that the connection is encrypted, but the certificates aren't verified.

Usage notes

The master user must run the mysql.rds_set_external_master procedure. This procedure must be run on the MySQL DB instance to be configured as the read replica of a MySQL instance running external to Amazon RDS.

Before you run mysql.rds_set_external_master, you must configure the instance of MySQL running external to Amazon RDS to be a source database instance. To connect to the MySQL instance running external to Amazon RDS, you must specify replication_user_name and replication_user_password values that indicate a replication user that has REPLICATION CLIENT and REPLICATION SLAVE permissions on the external instance of MySQL.

To configure an external instance of MySQL as a source database instance

1. Using the MySQL client of your choice, connect to the external instance of MySQL and create a user account to be used for replication. The following is an example.

   MySQL 5.7

```
CREATE USER 'repl_user'@'mydomain.com' IDENTIFIED BY 'password';
```

MySQL 8.0

```
CREATE USER 'repl_user'@'mydomain.com' IDENTIFIED WITH mysql_native_password BY
 'password';
```

> **Note**
>
> Specify a password other than the prompt shown here as a security best practice.

2. On the external instance of MySQL, grant `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges to your replication user. The following example grants `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges on all databases for the 'repl_user' user for your domain.

   MySQL 5.7

   ```
   GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'mydomain.com'
    IDENTIFIED BY 'password';
   ```

   MySQL 8.0

   ```
   GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'mydomain.com';
   ```

To use encrypted replication, configure source database instance to use SSL connections. Also, import the certificate authority certificate, client certificate, and client key into the DB instance or DB cluster using the mysql.rds_import_binlog_ssl_material procedure.

> **Note**
>
> We offer these stored procedures primarily to enable replication with MySQL instances running external to Amazon RDS. We recommend that you use Aurora Replicas to manage replication within an Aurora MySQL DB cluster when possible. For information about managing replication in Aurora MySQL DB clusters, see Using Aurora Replicas.

After calling `mysql.rds_set_external_master` to configure an Amazon RDS DB instance as a read replica, you can call mysql.rds_start_replication on the read replica to start the replication process. You can call mysql.rds_reset_external_master (Aurora MySQL version 2) to remove the read replica configuration.

When `mysql.rds_set_external_master` is called, Amazon RDS records the time, user, and an action of `set master` in the `mysql.rds_history` and `mysql.rds_replication_status` tables.

Examples

When run on a MySQL DB instance, the following example configures the DB instance to be a read replica of an instance of MySQL running external to Amazon RDS.

```
call mysql.rds_set_external_master(
  'Externaldb.some.com',
  3306,
  'repl_user',
  'password',
  'mysql-bin-changelog.0777',
  120,
  1);
```

mysql.rds_set_external_source (Aurora MySQL version 3)

Configures an Aurora MySQL DB instance to be a read replica of an instance of MySQL running external to Amazon RDS.

> **Important**
>
> To run this procedure, `autocommit` must be enabled. To enable it, set the `autocommit` parameter to 1. For information about modifying parameters, see Modifying parameters in a DB parameter group in Amazon Aurora.

Syntax

```
CALL mysql.rds_set_external_source (
  host_name
```

```
  , host_port
  , replication_user_name
  , replication_user_password
  , mysql_binary_log_file_name
  , mysql_binary_log_file_location
  , ssl_encryption
);
```

Parameters

host_name

The host name or IP address of the MySQL instance running external to Amazon RDS to become the source database instance.

host_port

The port used by the MySQL instance running external to Amazon RDS to be configured as the source database instance. If your network configuration includes Secure Shell (SSH) port replication that converts the port number, specify the port number that is exposed by SSH.

replication_user_name

The ID of a user with `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the MySQL instance running external to Amazon RDS. We recommend that you provide an account that is used solely for replication with the external instance.

replication_user_password

The password of the user ID specified in `replication_user_name`.

mysql_binary_log_file_name

The name of the binary log on the source database instance that contains the replication information.

mysql_binary_log_file_location

The location in the `mysql_binary_log_file_name` binary log at which replication starts reading the replication information.

You can determine the binlog file name and location by running `SHOW MASTER STATUS` on the source database instance.

ssl_encryption

A value that specifies whether Secure Socket Layer (SSL) encryption is used on the replication connection. 1 specifies to use SSL encryption, 0 specifies to not use encryption. The default is 0.

> **Note**
>
> You must have imported a custom SSL certificate using mysql.rds_import_binlog_ssl_material to enable this option. If you haven't imported an custom SSL certificate, then set this parameter to 0 and use mysql.rds_set_binlog_source_ssl (Aurora MySQL version 3) to enable SSL for binary log replication.
> The SOURCE_SSL_VERIFY_SERVER_CERT option isn't supported. This option is set to 0, which means that the connection is encrypted, but the certificates aren't verified.

Usage notes

The administrative user must run the `mysql.rds_set_external_source` procedure. This procedure must be run on the Aurora MySQL DB instance to be configured as the read replica of a MySQL instance running external to Amazon RDS.

Before you run `mysql.rds_set_external_source`, you must configure the instance of MySQL running external to Amazon RDS to be a source database instance. To connect to the MySQL instance running external to Amazon RDS, you must specify `replication_user_name` and `replication_user_password` values that indicate a replication user that has `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the external instance of MySQL.

To configure an external instance of MySQL as a source database instance

1. Using the MySQL client of your choice, connect to the external instance of MySQL and create a user account to be used for replication. The following is an example.

```
CREATE USER 'repl_user'@'mydomain.com' IDENTIFIED BY 'password';
```

> **Note**
>
> Specify a password other than the prompt shown here as a security best practice.

2. On the external instance of MySQL, grant `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges to your replication user. The following example grants `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges on all databases for the 'repl_user' user for your domain.

```
GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'mydomain.com';
```

To use encrypted replication, configure source database instance to use SSL connections. Also, import the certificate authority certificate, client certificate, and client key into the DB instance or DB cluster using the mysql.rds_import_binlog_ssl_material procedure.

> **Note**
>
> We offer these stored procedures primarily to enable replication with MySQL instances running external to Amazon RDS. We recommend that you use Aurora Replicas to manage replication within an Aurora MySQL DB cluster when possible. For information about managing replication in Aurora MySQL DB clusters, see Using Aurora Replicas.

After calling `mysql.rds_set_external_source` to configure an Aurora MySQL DB instance as a read replica, you can call mysql.rds_start_replication on the read replica to start the replication process. You can call mysql.rds_reset_external_source (Aurora MySQL version 3) to remove the read replica configuration.

When `mysql.rds_set_external_source` is called, Amazon RDS records the time, user, and an action of `set master` in the `mysql.rds_history` and `mysql.rds_replication_status` tables.

Examples

When run on an Aurora MySQL DB instance, the following example configures the DB instance to be a read replica of an instance of MySQL running external to Amazon RDS.

```
call mysql.rds_set_external_source(
  'Externaldb.some.com',
  3306,
  'repl_user',
  'password',
  'mysql-bin-changelog.0777',
  120,
```

```
  1);
```

mysql.rds_set_external_master_with_auto_position (Aurora MySQL version 2)

Configures an Aurora MySQL primary instance to accept incoming replication from an external MySQL instance. This procedure also configures replication based on global transaction identifiers (GTIDs).

This procedure doesn't configure delayed replication, because Aurora MySQL doesn't support delayed replication.

Syntax

```
CALL mysql.rds_set_external_master_with_auto_position (
  host_name
  , host_port
  , replication_user_name
  , replication_user_password
  , ssl_encryption
);
```

Parameters

host_name

The host name or IP address of the MySQL instance running external to Aurora to become the replication source.

host_port

The port used by the MySQL instance running external to Aurora to be configured as the replication source. If your network configuration includes Secure Shell (SSH) port replication that converts the port number, specify the port number that is exposed by SSH.

replication_user_name

The ID of a user with `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the MySQL instance running external to Aurora. We recommend that you provide an account that is used solely for replication with the external instance.

replication_user_password

The password of the user ID specified in `replication_user_name`.

ssl_encryption

This option isn't currently implemented. The default is 0.

Usage notes

For an Aurora MySQL DB cluster, you call this stored procedure while connected to the primary instance.

The master user must run the `mysql.rds_set_external_master_with_auto_position` procedure. The master user runs this procedure on the primary instance of an Aurora MySQL DB cluster that acts as a replication target. This can be the replication target of an external MySQL DB instance or an Aurora MySQL DB cluster.

This procedure is supported for Aurora MySQL version 2. For Aurora MySQL version 3, use the procedure mysql.rds_set_external_source_with_auto_position (Aurora MySQL version 3) instead.

Before you run `mysql.rds_set_external_master_with_auto_position`, configure the external MySQL DB instance to be a replication source. To connect to the external MySQL instance, specify values for `replication_user_name` and `replication_user_password`. These values must indicate a replication user that has `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the external MySQL instance.

To configure an external MySQL instance as a replication source

1. Using the MySQL client of your choice, connect to the external MySQL instance and create a user account to be used for replication. The following is an example.

   ```
   CREATE USER 'repl_user'@'mydomain.com' IDENTIFIED BY 'SomePassW0rd'
   ```

2. On the external MySQL instance, grant `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges to your replication user. The following example grants `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges on all databases for the `'repl_user'` user for your domain.

   ```
   GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'mydomain.com'
   IDENTIFIED BY 'SomePassW0rd'
   ```

When you call `mysql.rds_set_external_master_with_auto_position`, Amazon RDS records certain information. This information is the time, the user, and an action of `"set master"` in the `mysql.rds_history` and `mysql.rds_replication_status` tables.

To skip a specific GTID-based transaction that is known to cause a problem, you can use the mysql.rds_skip_transaction_with_gtid(Aurora MySQL version 2 and 3) stored procedure. For more information about working with GTID-based replication, see Using GTID-based replication.

Examples

When run on an Aurora primary instance, the following example configures the Aurora cluster to act as a read replica of an instance of MySQL running external to Aurora.

```
call mysql.rds_set_external_master_with_auto_position(
  'Externaldb.some.com',
  3306,
  'repl_user'@'mydomain.com',
  'SomePassW0rd');
```

mysql.rds_set_external_source_with_auto_position (Aurora MySQL version 3)

Configures an Aurora MySQL primary instance to accept incoming replication from an external MySQL instance. This procedure also configures replication based on global transaction identifiers (GTIDs).

Syntax

```
CALL mysql.rds_set_external_source_with_auto_position (
  host_name
  , host_port
  , replication_user_name
  , replication_user_password
  , ssl_encryption
);
```

Parameters

host_name

The host name or IP address of the MySQL instance running external to Aurora to become the replication source.

host_port

The port used by the MySQL instance running external to Aurora to be configured as the replication source. If your network configuration includes Secure Shell (SSH) port replication that converts the port number, specify the port number that is exposed by SSH.

replication_user_name

The ID of a user with `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the MySQL instance running external to Aurora. We recommend that you provide an account that is used solely for replication with the external instance.

replication_user_password

The password of the user ID specified in `replication_user_name`.

ssl_encryption

This option isn't currently implemented. The default is 0.

> **Note**
>
> Use mysql.rds_set_binlog_source_ssl (Aurora MySQL version 3) to enable SSL for binary log replication.

Usage notes

For an Aurora MySQL DB cluster, you call this stored procedure while connected to the primary instance.

The administrative user must run the `mysql.rds_set_external_source_with_auto_position` procedure. The administrative user runs this procedure on the primary instance of an Aurora MySQL DB cluster that acts as a replication target. This can be the replication target of an external MySQL DB instance or an Aurora MySQL DB cluster.

This procedure is supported for Aurora MySQL version 3. This procedure doesn't configure delayed replication, because Aurora MySQL doesn't support delayed replication.

Before you run `mysql.rds_set_external_source_with_auto_position`, configure the external MySQL DB instance to be a replication source. To connect to the external MySQL instance, specify values for `replication_user_name` and `replication_user_password`. These values

must indicate a replication user that has REPLICATION CLIENT and REPLICATION SLAVE permissions on the external MySQL instance.

To configure an external MySQL instance as a replication source

1. Using the MySQL client of your choice, connect to the external MySQL instance and create a user account to be used for replication. The following is an example.

```
CREATE USER 'repl_user'@'mydomain.com' IDENTIFIED BY 'SomePassW0rd'
```

2. On the external MySQL instance, grant REPLICATION CLIENT and REPLICATION SLAVE privileges to your replication user. The following example grants REPLICATION CLIENT and REPLICATION SLAVE privileges on all databases for the 'repl_user' user for your domain.

```
GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'mydomain.com'
IDENTIFIED BY 'SomePassW0rd'
```

When you call mysql.rds_set_external_source_with_auto_position, Amazon RDS records certain information. This information is the time, the user, and an action of "set master" in the mysql.rds_history and mysql.rds_replication_status tables.

To skip a specific GTID-based transaction that is known to cause a problem, you can use the mysql.rds_skip_transaction_with_gtid(Aurora MySQL version 2 and 3) stored procedure. For more information about working with GTID-based replication, see Using GTID-based replication.

Examples

When run on an Aurora primary instance, the following example configures the Aurora cluster to act as a read replica of an instance of MySQL running external to Aurora.

```
call mysql.rds_set_external_source_with_auto_position(
  'Externaldb.some.com',
  3306,
  'repl_user'@'mydomain.com',
  'SomePassW0rd');
```

mysql.rds_set_external_source_with_delay (Aurora MySQL version 8.4.8 and higher)

Configures an Aurora MySQL DB cluster to be a read replica of an instance of MySQL running external to Amazon RDS and configures delayed replication.

Important

To run this procedure, `autocommit` must be enabled. To enable it, set the `autocommit` parameter to 1. For information about modifying parameters, see Modifying parameters in a DB parameter group in Amazon Aurora.

Syntax

```
CALL mysql.rds_set_external_source_with_delay (
  host_name
  , host_port
  , replication_user_name
  , replication_user_password
  , mysql_binary_log_file_name
  , mysql_binary_log_file_location
  , ssl_encryption
  , delay
);
```

Parameters

host_name

The host name or IP address of the MySQL instance running external to Amazon RDS that will become the source database instance.

host_port

The port used by the MySQL instance running external to Amazon RDS to be configured as the source database instance. If your network configuration includes SSH port replication that converts the port number, specify the port number that is exposed by SSH.

replication_user_name

The ID of a user with `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the MySQL instance running external to Amazon RDS. We recommend that you provide an account that is used solely for replication with the external instance.

replication_user_password

The password of the user ID specified in `replication_user_name`.

mysql_binary_log_file_name

The name of the binary log on the source database instance contains the replication information.

mysql_binary_log_file_location

The location in the mysql_binary_log_file_name binary log at which replication will start reading the replication information.

You can determine the binlog file name and location by running SHOW MASTER STATUS on the source database instance.

ssl_encryption

A value that specifies whether Secure Socket Layer (SSL) encryption is used on the replication connection. 1 specifies to use SSL encryption, 0 specifies to not use encryption. The default is 0.

delay

The minimum number of seconds to delay replication from source database instance.

The limit for this parameter is one day (86400 seconds).

Usage notes

The administrative user must run the mysql.rds_set_external_source_with_delay procedure. This procedure must be run on the MySQL DB instance to be configured as the read replica of a MySQL instance running external to Amazon RDS.

Before you run mysql.rds_set_external_source_with_delay, you must configure the instance of MySQL running external to Amazon RDS to be a source database instance. To connect to the MySQL instance running external to Amazon RDS, you must specify values for replication_user_name and replication_user_password. These values must indicate a replication user that has REPLICATION CLIENT and REPLICATION SLAVE permissions on the external instance of MySQL.

To configure an external instance of MySQL as a source database instance

1. Using the MySQL client of your choice, connect to the external instance of MySQL and create a user account to be used for replication. The following is an example.

```
CREATE USER 'repl_user'@'mydomain.com' IDENTIFIED BY 'SomePassW0rd'
```

2. On the external instance of MySQL, grant `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges to your replication user. The following example grants `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges on all databases for the `'repl_user'` user for your domain.

```
GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'mydomain.com'
IDENTIFIED BY 'SomePassW0rd'
```

After calling `mysql.rds_set_external_source_with_delay` to configure an Amazon RDS DB instance as a read replica, you can call mysql.rds_start_replication on the read replica to start the replication process. You can call mysql.rds_reset_external_source (Aurora MySQL version 3) to remove the read replica configuration.

When you call `mysql.rds_set_external_source_with_delay`, Amazon RDS records the time, the user, and an action of `set master` in the `mysql.rds_history` and `mysql.rds_replication_status` tables.

For disaster recovery, you can use this procedure with the mysql.rds_start_replication_until(Aurora MySQL version 3) or mysql.rds_start_replication_until_gtid(Aurora MySQL version 3) stored procedure. To roll forward changes to a delayed read replica to the time just before a disaster, you can run the `mysql.rds_set_external_source_with_delay` procedure. After the mysql.rds_start_replication_until(Aurora MySQL version 3) procedure stops replication, you can promote the read replica to be the new primary DB instance.

To use the mysql.rds_start_replication_until_gtid(Aurora MySQL version 3) procedure, GTID-based replication must be enabled. To skip a specific GTID-based transaction that is known to cause disaster, you can use the mysql.rds_skip_transaction_with_gtid(Aurora MySQL version 2 and 3) stored procedure. For more information about working with GTID-based replication, see Using GTID-based replication.

Examples

When run on a Aurora MySQL DB instance, the following example configures the DB instance to be a read replica of an instance of MySQL running external to Amazon RDS. It sets the minimum replication delay to one hour (3,600 seconds) on the Aurora MySQL DB instance. A change from the MySQL source database instance running external to Amazon RDS isn't applied on the Aurora MySQL read replica for at least one hour.

```
call mysql.rds_set_external_source_with_delay(
```

```
  'Externaldb.example.com',
  3306,
  'repl_user',
  'SomePassW0rd',
  'mysql-bin-changelog.000777',
  120,
  1,
  3600);
```

mysql.rds_set_master_auto_position (Aurora MySQL version 2)

Sets the replication mode to be based on either binary log file positions or on global transaction identifiers (GTIDs).

Syntax

```
CALL mysql.rds_set_master_auto_position (
auto_position_mode
);
```

Parameters

auto_position_mode

A value that indicates whether to use log file position replication or GTID-based replication:

- `0` – Use the replication method based on binary log file position. The default is `0`.
- 1 – Use the GTID-based replication method.

Usage notes

The master user must run the `mysql.rds_set_master_auto_position` procedure.

This procedure is supported for Aurora MySQL version 2.

mysql.rds_set_read_only (Aurora MySQL version 3)

Turns `read_only` mode on or off globally for the DB instance.

Syntax

```
CALL mysql.rds_set_read_only(mode);
```

Parameters

mode

A value that indicates whether `read_only` mode is on or off globally for the DB instance:

- `0` – OFF. The default is `0`.
- `1` – ON

Usage notes

The `mysql.rds_set_read_only` stored procedure modifies only the `read_only` parameter. The `innodb_read_only` parameter can't be changed on reader DB instances.

The `read_only` parameter change doesn't persist on rebooting. To make permanent changes to `read_only`, you must use the `read_only` DB cluster parameter.

This procedure is supported for Aurora MySQL version 3.06 and higher.

mysql.rds_set_session_binlog_format (Aurora MySQL version 2)

Sets the binary log format for the current session.

Syntax

```
CALL mysql.rds_set_session_binlog_format(format);
```

Parameters

format

A value that indicates the binary log format for the current session:

- `STATEMENT` – The replication source writes events to the binary log based on SQL statements.
- `ROW` – The replication source writes events to the binary log that indicate changes to individual table rows.
- `MIXED` – Logging is generally based on SQL statements, but switches to rows under certain conditions. For more information, see Mixed Binary Logging Format in the MySQL documentation.

Usage notes

For an Aurora MySQL DB cluster, you call this stored procedure while connected to the primary instance.

To use this stored procedure, you must have binary logging configured for the current session.

For Aurora, this procedure is supported for Aurora MySQL version 2.12 and higher MySQL 5.7–compatible versions.

mysql.rds_set_source_auto_position (Aurora MySQL version 3)

Sets the replication mode to be based on either binary log file positions or on global transaction identifiers (GTIDs).

Syntax

```
CALL mysql.rds_set_source_auto_position (auto_position_mode);
```

Parameters

auto_position_mode

A value that indicates whether to use log file position replication or GTID-based replication:

- `0` – Use the replication method based on binary log file position. The default is `0`.
- 1 – Use the GTID-based replication method.

Usage notes

For an Aurora MySQL DB cluster, you call this stored procedure while connected to the primary instance.

The administrative user must run the `mysql.rds_set_source_auto_position` procedure.

mysql.rds_set_source_delay (Aurora MySQL version 8.4.8 and higher)

Sets the minimum number of seconds to delay replication from source database instance to the current read replica. Use this procedure when you are connected to a read replica to delay replication from its source database instance.

Syntax

```
CALL mysql.rds_set_source_delay(
delay
);
```

Parameters

delay

The minimum number of seconds to delay replication from the source database instance.

The limit for this parameter is 259,200 seconds (72 hours).

Usage notes

The admin user must run the `mysql.rds_set_source_delay` procedure.

This is a wrapper that calls mysql.rds_set_source_delay_for_channel with an empty channel name (default channel).

Replication must be stopped before calling this procedure. If replication is running, you will receive an error: `You can't set replication delay because replication is running. First call mysql.rds_stop_replication.`

For disaster recovery, you can use this procedure with the mysql.rds_start_replication_until(Aurora MySQL version 3) stored procedure or the mysql.rds_start_replication_until_gtid(Aurora MySQL version 3) stored procedure. To roll forward changes to a delayed read replica to the time just before a disaster, you can run the `mysql.rds_set_source_delay` procedure. After the mysql.rds_start_replication_until(Aurora MySQL version 3) or mysql.rds_start_replication_until_gtid(Aurora MySQL version 3) procedure stops replication, you can promote the read replica to be the new primary DB cluster by using the instructions in Promoting a read replica to a DB cluster for Aurora MySQL.

To use the mysql.rds_start_replication_until_gtid(Aurora MySQL version 3) procedure, GTID-based replication must be enabled. To skip a specific GTID-based transaction that is known to cause disaster, you can use the mysql.rds_skip_transaction_with_gtid(Aurora MySQL version 2 and 3) stored procedure.

Examples

To delay replication from source database instance to the current read replica for at least one hour (3,600 seconds):

```
CALL mysql.rds_set_source_delay(3600);
```

mysql.rds_skip_repl_error

Skips and deletes a replication error on a MySQL DB read replica.

Syntax

```
CALL mysql.rds_skip_repl_error;
```

Usage notes

The master user must run the `mysql.rds_skip_repl_error` procedure on a read replica. For more information about this procedure, see Skipping the current replication error.

To determine if there are errors, run the MySQL `SHOW REPLICA STATUS\G` command. If a replication error isn't critical, you can run `mysql.rds_skip_repl_error` to skip the error. If there are multiple errors, `mysql.rds_skip_repl_error` deletes the first error, then warns that others are present. You can then use `SHOW REPLICA STATUS\G` to determine the correct course of action for the next error. For information about the values returned, see SHOW REPLICA STATUS statement in the MySQL documentation.

For more information about addressing replication errors with Aurora MySQL, see Diagnosing and resolving a MySQL read replication failure.

Replication stopped error

When you call the `mysql.rds_skip_repl_error` procedure, you might receive an error message stating that the replica is down or disabled.

This error message appears if you run the procedure on the primary instance instead of the read replica. You must run this procedure on the read replica for the procedure to work.

This error message might also appear if you run the procedure on the read replica, but replication can't be restarted successfully.

If you need to skip a large number of errors, the replication lag can increase beyond the default retention period for binary log (binlog) files. In this case, you might encounter a fatal error because of binlog files being purged before they have been replayed on the read replica. This purge causes replication to stop, and you can no longer call the `mysql.rds_skip_repl_error` command to skip replication errors.

You can mitigate this issue by increasing the number of hours that binlog files are retained on your source database instance. After you have increased the binlog retention time, you can restart replication and call the `mysql.rds_skip_repl_error` command as needed.

To set the binlog retention time, use the mysql.rds_set_configuration procedure and specify a configuration parameter of `'binlog retention hours'` along with the number of hours to retain binlog files on the DB cluster. The following example sets the retention period for binlog files to 48 hours.

```
CALL mysql.rds_set_configuration('binlog retention hours', 48);
```

mysql.rds_start_replication

Initiates replication from an Aurora MySQL DB cluster.

> **Note**
>
> You can use the mysql.rds_start_replication_until(Aurora MySQL version 3) or mysql.rds_start_replication_until_gtid(Aurora MySQL version 3) stored procedure to initiate replication from an Aurora MySQL DB instance and stop replication at the specified binary log file location.

Syntax

```
CALL mysql.rds_start_replication;
```

Usage notes

The master user must run the `mysql.rds_start_replication` procedure.

To import data from an instance of MySQL external to Amazon RDS, call `mysql.rds_start_replication` on the read replica to start the replication process after you

call mysql.rds_set_external_master (Aurora MySQL version 2) or mysql.rds_set_external_source (Aurora MySQL version 3) to build the replication configuration. For more information, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

To export data to an instance of MySQL external to Amazon RDS, call `mysql.rds_start_replication` and `mysql.rds_stop_replication` on the read replica to control some replication actions, such as purging binary logs. For more information, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

You can also call `mysql.rds_start_replication` on the read replica to restart any replication process that you previously stopped by calling `mysql.rds_stop_replication`. For more information, see Replication stopped error.

mysql.rds_start_replication_until(Aurora MySQL version 3)

Initiates replication from an Aurora MySQL DB cluster and stops replication at the specified binary log file location.

Syntax

```
CALL mysql.rds_start_replication_until (
replication_log_file
  , replication_stop_point
);
```

Parameters

replication_log_file

The name of the binary log on the source database instance that contains the replication information.

replication_stop_point

The location in the `replication_log_file` binary log at which replication will stop.

Usage notes

The master user must run the `mysql.rds_start_replication_until` procedure.

This procedure is supported for Aurora MySQL version 3.04 and higher.

The `mysql.rds_start_replication_until` stored procedure isn't supported for managed replication, which includes the following:

- Replicating Amazon Aurora MySQL DB clusters across Amazon Web Services Regions
- Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster by using an Aurora read replica

The file name specified for the `replication_log_file` parameter must match the source database instance binlog file name.

When the `replication_stop_point` parameter specifies a stop location that is in the past, replication is stopped immediately.

Examples

The following example initiates replication and replicates changes until it reaches location `120` in the `mysql-bin-changelog.000777` binary log file.

```
call mysql.rds_start_replication_until(
  'mysql-bin-changelog.000777',
  120);
```

mysql.rds_stop_replication

Stops replication from a MySQL DB instance.

Syntax

```
CALL mysql.rds_stop_replication;
```

Usage notes

The master user must run the `mysql.rds_stop_replication` procedure.

If you are configuring replication to import data from an instance of MySQL running external to Amazon RDS, you call `mysql.rds_stop_replication` on the read replica to stop the replication process after the import has completed. For more information, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

If you are configuring replication to export data to an instance of MySQL external to Amazon RDS, you call `mysql.rds_start_replication` and `mysql.rds_stop_replication` on the read replica to control some replication actions, such as purging binary logs. For more information, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication).

The `mysql.rds_stop_replication` stored procedure isn't supported for managed replication, which includes the following:

- Replicating Amazon Aurora MySQL DB clusters across Amazon Web Services Regions
- Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster by using an Aurora read replica

Managing multi-source replication

The following stored procedures set up and manage replication channels on a Aurora MySQL multi-source replica. For more information, see Configure multi-source replication for Amazon Aurora MySQL.

These stored procedures are available with Aurora MySQL version 8.4.8 and higher.

When using stored procedures to manage replication with a replication user configured with `caching_sha2_password`, you must configure TLS by specifying `ssl_encryption=1`. `caching_sha2_password` is the default authentication plugin for MySQL 8.4.

Topics

- mysql.rds_next_source_log_for_channel
- mysql.rds_reset_external_source_for_channel
- mysql.rds_set_external_source_for_channel
- mysql.rds_set_external_source_with_auto_position_for_channel
- mysql.rds_set_external_source_with_delay_for_channel
- mysql.rds_set_source_auto_position_for_channel
- mysql.rds_set_source_delay_for_channel
- mysql.rds_skip_repl_error_for_channel
- mysql.rds_start_replication_for_channel
- mysql.rds_start_replication_until_for_channel
- mysql.rds_start_replication_until_gtid_for_channel
- mysql.rds_stop_replication_for_channel

mysql.rds_next_source_log_for_channel

Changes the source DB instance log position to the start of the next binary log on the source DB instance for the channel. Use this procedure only if you are receiving replication I/O error 1236 on a multi-source replica.

Syntax

```
CALL mysql.rds_next_source_log_for_channel(
```

```
curr_master_log,
channel_name
);
```

Parameters

curr_master_log

The index of the current source log file. For example, if the current file is named `mysql-bin-changelog.012345`, then the index is 12345. To determine the current source log file name, run the `SHOW REPLICA STATUS FOR CHANNEL '`*channel_name*`'` command and view the `Source_Log_File` field.

channel_name

The name of the replication channel on the multi-source replica. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_next_source_log_for_channel` procedure. If there is an IO_Thread error, for example, you can use this procedure to skip all the events in the current binary log file and resume the replication from the next binary log file for the channel specified in `channel_name`.

Example

Assume replication fails on a channel on a multi-source replica. Running `SHOW REPLICA STATUS FOR CHANNEL 'channel_1'\G` on the multi-source replica returns the following result:

```
mysql> SHOW REPLICA STATUS FOR CHANNEL 'channel_1'\G
*************************** 1. row ***************************
             Replica_IO_State: Waiting for source to send event
                  Source_Host: myhost.XXXXXXXXXXXXXX.rr-rrrr-1.rds.amazonaws.com
                  Source_User: ReplicationUser
                  Source_Port: 3306
                Connect_Retry: 60
              Source_Log_File: mysql-bin-changelog.012345
          Read_Source_Log_Pos: 1219393
               Relay_Log_File: replica-relay-bin.000003
```

```
                Relay_Log_Pos: 30223388
        Relay_Source_Log_File: mysql-bin-changelog.012345
           Replica_IO_Running: No
          Replica_SQL_Running: Yes
              Replicate_Do_DB:.
              .
              .
                Last_IO_Errno: 1236
                Last_IO_Error: Got fatal error 1236 from master when reading data from
 binary log: 'Client requested master to start replication from impossible position;
 the first event 'mysql-bin-changelog.013406' at 1219393, the last event read from
 '/rdsdbdata/log/binlog/mysql-bin-changelog.012345' at 4, the last byte read from '/
rdsdbdata/log/binlog/mysql-bin-changelog.012345' at 4.'
               Last_SQL_Errno: 0
               Last_SQL_Error:
               .
               .
                 Channel_name: channel_1
              .
              .
 -- Some fields are omitted in this example output
```

The `Last_IO_Errno` field shows that the instance is receiving I/O error 1236. The `Source_Log_File` field shows that the file name is `mysql-bin-changelog.012345`, which means that the log file index is `12345`. To resolve the error, you can call `mysql.rds_next_source_log_for_channel` with the following parameters:

```
CALL mysql.rds_next_source_log_for_channel(12345,'channel_1');
```

mysql.rds_reset_external_source_for_channel

Stops the replication process on the specified channel, and removes the channel and associated configurations from the multi-source replica.

> **Important**
>
> To run this procedure, `autocommit` must be enabled. To enable it, set the `autocommit` parameter to 1. For information about modifying parameters, see Modifying parameters in a DB parameter group in Amazon Aurora.

Syntax

```
CALL mysql.rds_reset_external_source_for_channel (channel_name);
```

Parameters

channel_name

The name of the replication channel on the multi-source replica. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_reset_external_source_for_channel` procedure. This procedure deletes all relay logs that belong to the channel being removed.

mysql.rds_set_external_source_for_channel

Configures a replication channel on an RDS for MySQL DB instance to replicate the data from another RDS for MySQL DB instance.

Important

To run this procedure, `autocommit` must be enabled. To enable it, set the `autocommit` parameter to 1. For information about modifying parameters, see Modifying parameters in a DB parameter group in Amazon Aurora.

Note

You can use the the section called “mysql.rds_set_external_source_with_delay_for_channel” stored procedure instead to configure this channel with delayed replication.

Syntax

```
CALL mysql.rds_set_external_source_for_channel (
  host_name
  , host_port
  , replication_user_name
  , replication_user_password
  , mysql_binary_log_file_name
  , mysql_binary_log_file_location
  , ssl_encryption
  , channel_name
);
```

Parameters

host_name

The host name or IP address of the RDS for MySQL source DB instance.

host_port

The port used by the RDS for MySQL source DB instance. If your network configuration includes Secure Shell (SSH) port replication that converts the port number, specify the port number that is exposed by SSH.

replication_user_name

The ID of a user with `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the RDS for MySQL source DB instance. We recommend that you provide an account that is used solely for replication with the source DB instance.

replication_user_password

The password of the user ID specified in `replication_user_name`.

mysql_binary_log_file_name

The name of the binary log on the source DB instance that contains the replication information.

mysql_binary_log_file_location

The location in the `mysql_binary_log_file_name` binary log at which replication starts reading the replication information.

You can determine the binlog file name and location by running `SHOW BINARY LOG STATUS` on the source DB instance.

> **Note**
>
> Previous versions of MySQL used `SHOW MASTER STATUS` instead of `SHOW BINARY LOG STATUS`. If you are using a MySQL version before 8.4, then use `SHOW MASTER STATUS`.

`ssl_encryption`

A value that specifies whether Secure Socket Layer (SSL) encryption is used on the replication connection. 1 specifies to use SSL encryption, 0 specifies to not use encryption. The default is 0.

> **Note**
>
> The `SOURCE_SSL_VERIFY_SERVER_CERT` option isn't supported. This option is set to 0, which means that the connection is encrypted, but the certificates aren't verified.

`channel_name`

The name of the replication channel. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_set_external_source_for_channel` procedure. This procedure must be run on the target RDS for MySQL DB instance on which you're creating the replication channel.

Before you run `mysql.rds_set_external_source_for_channel`, configure a replication user on the source DB instance with the privileges required for the multi-source replica. To connect the multi-source replica to the source DB instance, you must specify `replication_user_name` and `replication_user_password` values of a replication user that has `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the source DB instance.

To configure a replication user on the source DB instance

1. Using the MySQL client of your choice, connect to the source DB instance and create a user account to be used for replication. The following is an example.

> **Important**
>
> As a security best practice, specify a password other than the placeholder value shown in the following examples.

```
CREATE USER 'repl_user'@'example.com' IDENTIFIED BY 'password';
```

2. On the source DB instance, grant `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges to your replication user. The following example grants `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges on all databases for the 'repl_user' user for your domain.

```
GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'example.com';
```

To use encrypted replication, configure the source DB instance to use SSL connections.

After calling `mysql.rds_set_external_source_for_channel` to configure this replication channel, you can call mysql.rds_start_replication_for_channel on the replica to start the replication process on the channel. You can call the section called "mysql.rds_reset_external_source_for_channel" to stop replication on the channel and remove the channel configuration from the replica.

When you call `mysql.rds_set_external_source_for_channel`, Amazon RDS records the time, user, and an action of `set channel source` in the `mysql.rds_history` table without channel-specific details, and in the `mysql.rds_replication_status` table, with the channel name. This information is recorded only for internal usage and monitoring purposes. To record the complete procedure call for auditing purpose, consider enabling audit logs or general logs, based on the specific requirements of your application.

Examples

When run on a RDS for MySQL DB instance, the following example configures a replication channel named `channel_1` on this DB instance to replicate data from the source specified by host `sourcedb.example.com` and port `3306`.

```
call mysql.rds_set_external_source_for_channel(
  'sourcedb.example.com',
  3306,
```

```
  'repl_user',
  'password',
  'mysql-bin-changelog.0777',
  120,
  0,
  'channel_1');
```

mysql.rds_set_external_source_with_auto_position_for_channel

Configures a replication channel on an RDS for MySQL DB instance with an optional replication delay. The replication is based on global transaction identifiers (GTIDs).

> **Important**
>
> To run this procedure, `autocommit` must be enabled. To enable it, set the `autocommit` parameter to 1. For information about modifying parameters, see Modifying parameters in a DB parameter group in Amazon Aurora.

Syntax

```
CALL mysql.rds_set_external_source_with_auto_position_for_channel (
  host_name
  , host_port
  , replication_user_name
  , replication_user_password
  , ssl_encryption
  , delay
  , channel_name
);
```

Parameters

host_name

The host name or IP address of the RDS for MySQL source DB instance.

host_port

The port used by the RDS for MySQL source DB instance. If your network configuration includes Secure Shell (SSH) port replication that converts the port number, specify the port number that is exposed by SSH.

replication_user_name

The ID of a user with `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the RDS for MySQL source DB instance. We recommend that you provide an account that is used solely for replication with the source DB instance.

replication_user_password

The password of the user ID specified in `replication_user_name`.

ssl_encryption

A value that specifies whether Secure Socket Layer (SSL) encryption is used on the replication connection. 1 specifies to use SSL encryption, 0 specifies to not use encryption. The default is 0.

> **Note**
>
> The `SOURCE_SSL_VERIFY_SERVER_CERT` option isn't supported. This option is set to 0, which means that the connection is encrypted, but the certificates aren't verified.

delay

The minimum number of seconds to delay replication from source DB instance.

The limit for this parameter is one day (86,400 seconds).

channel_name

The name of the replication channel. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_set_external_source_with_auto_position_for_channel` procedure. This procedure must be run on the target RDS for MySQL DB instance on which you're creating the replication channel.

Before you run `rds_set_external_source_with_auto_position_for_channel`, configure a replication user on the source DB instance with the privileges required for the multi-source replica. To connect the multi-source replica to the source DB instance, you must specify

`replication_user_name` and `replication_user_password` values of a replication user that has `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the source DB instance.

To configure a replication user on the source DB instance

1. Using the MySQL client of your choice, connect to the source DB instance and create a user account to be used for replication. The following is an example.

   > **Important**
   >
   > As a security best practice, specify a password other than the placeholder value shown in the following examples.

   ```
   CREATE USER 'repl_user'@'example.com' IDENTIFIED BY 'password';
   ```

2. On the source DB instance, grant `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges to your replication user. The following example grants `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges on all databases for the 'repl_user' user for your domain.

   ```
   GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'example.com';
   ```

To use encrypted replication, configure the source DB instance to use SSL connections.

After calling `mysql.rds_set_external_source_with_auto_position_for_channel` to configure an Amazon RDS DB instance as a read replica on a specific channel, you can call the section called "mysql.rds_start_replication_for_channel" on the read replica to start the replication process on that channel.

After calling `mysql.rds_set_external_source_with_auto_position_for_channel` to configure this replication channel, you can call mysql.rds_start_replication_for_channel on the replica to start the replication process on the channel. You can call the section called "mysql.rds_reset_external_source_for_channel" to stop replication on the channel and remove the channel configuration from the replica.

Examples

When run on a RDS for MySQL DB instance, the following example configures a replication channel named `channel_1` on this DB instance to replicate data from the source specified by host

`sourcedb.example.com` and port `3306` It sets the minimum replication delay to one hour (3,600 seconds). This means that a change from the source RDS for MySQL DB instance isn't applied on the multi-source replica for at least one hour.

```
call mysql.rds_set_external_source_with_auto_position_for_channel(
  'sourcedb.example.com',
  3306,
  'repl_user',
  'password',
  1,
  3600,
  'channel_1');
```

mysql.rds_set_external_source_with_delay_for_channel

Configures a replication channel on an RDS for MySQL DB instance with a specified replication delay.

> **Important**
>
> To run this procedure, `autocommit` must be enabled. To enable it, set the `autocommit` parameter to 1. For information about modifying parameters, see Modifying parameters in a DB parameter group in Amazon Aurora.

Syntax

```
CALL mysql.rds_set_external_source_with_delay_for_channel (
  host_name
  , host_port
  , replication_user_name
  , replication_user_password
  , mysql_binary_log_file_name
  , mysql_binary_log_file_location
  , ssl_encryption
  , delay
  , channel_name
);
```

Parameters

host_name

The host name or IP address of the RDS for MySQL source DB instance.

host_port

The port used by the RDS for MySQL source DB instance. If your network configuration includes Secure Shell (SSH) port replication that converts the port number, specify the port number that is exposed by SSH.

replication_user_name

The ID of a user with `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the RDS for MySQL source DB instance. We recommend that you provide an account that is used solely for replication with the source DB instance.

replication_user_password

The password of the user ID specified in `replication_user_name`.

mysql_binary_log_file_name

The name of the binary log on the source DB instance contains the replication information.

mysql_binary_log_file_location

The location in the `mysql_binary_log_file_name` binary log at which replication will start reading the replication information.

You can determine the binlog file name and location by running `SHOW BINARY LOG STATUS` on the source database instance.

> **Note**
>
> Previous versions of MySQL used `SHOW MASTER STATUS` instead of `SHOW BINARY LOG STATUS`. If you are using a MySQL version before 8.4, then use `SHOW MASTER STATUS`.

ssl_encryption

A value that specifies whether Secure Socket Layer (SSL) encryption is used on the replication connection. 1 specifies to use SSL encryption, 0 specifies to not use encryption. The default is 0.

> **Note**
>
> The SOURCE_SSL_VERIFY_SERVER_CERT option isn't supported. This option is set to 0, which means that the connection is encrypted, but the certificates aren't verified.

delay

The minimum number of seconds to delay replication from source DB instance.

The limit for this parameter is one day (86400 seconds).

channel_name

The name of the replication channel. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_set_external_source_with_delay_for_channel` procedure. This procedure must be run on the target RDS for MySQL DB instance on which you're creating the replication channel.

Before you run `mysql.rds_set_external_source_with_delay_for_channel`, configure a replication user on the source DB instance with the privileges required for the multi-source replica. To connect the multi-source replica to the source DB instance, you must specify `replication_user_name` and `replication_user_password` values of a replication user that has `REPLICATION CLIENT` and `REPLICATION SLAVE` permissions on the source DB instance.

To configure a replication user on the source DB instance

1. Using the MySQL client of your choice, connect to the source DB instance and create a user account to be used for replication. The following is an example.

   > **Important**
   >
   > As a security best practice, specify a password other than the placeholder value shown in the following examples.

```
CREATE USER 'repl_user'@'example.com' IDENTIFIED BY 'password';
```

2. On the source DB instance, grant `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges to your replication user. The following example grants `REPLICATION CLIENT` and `REPLICATION SLAVE` privileges on all databases for the 'repl_user' user for your domain.

```
GRANT REPLICATION CLIENT, REPLICATION SLAVE ON *.* TO 'repl_user'@'example.com';
```

To use encrypted replication, configure the source DB instance to use SSL connections.

After calling `mysql.rds_set_external_source_with_delay_for_channel` to configure this replication channel, you can call mysql.rds_start_replication_for_channel on the replica to start the replication process on the channel. You can call the section called "mysql.rds_reset_external_source_for_channel" to stop replication on the channel and remove the channel configuration from the replica.

When you call `mysql.rds_set_external_source_with_delay_for_channel`, Amazon RDS records the time, user, and an action of `set channel source` in the `mysql.rds_history` table without channel-specific details, and in the `mysql.rds_replication_status` table, with the channel name. This information is recorded only for internal usage and monitoring purposes. To record the complete procedure call for auditing purpose, consider enabling audit logs or general logs, based on the specific requirements of your application.

Examples

When run on a RDS for MySQL DB instance, the following example configures a replication channel named `channel_1` on this DB instance to replicate data from the source specified by host `sourcedb.example.com` and port `3306` It sets the minimum replication delay to one hour (3,600 seconds). This means that a change from the source RDS for MySQL DB instance isn't applied on the multi-source replica for at least one hour.

```
call mysql.rds_set_external_source_with_delay_for_channel(
  'sourcedb.example.com',
  3306,
  'repl_user',
  'password',
  'mysql-bin-changelog.000777',
```

```
  120,
  1,
  3600,
  'channel_1');
```

mysql.rds_set_source_auto_position_for_channel

Sets the replication mode for the specified channel to be based on either binary log file positions or on global transaction identifiers (GTIDs).

Syntax

```
CALL mysql.rds_set_source_auto_position_for_channel (
auto_position_mode
 , channel_name
);
```

Parameters

auto_position_mode

A value that indicates whether to use log file position replication or GTID-based replication:

- 0 – Use the replication method based on binary log file position. The default is 0.
- 1 – Use the GTID-based replication method.

channel_name

The name of the replication channel on the multi-source replica. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the mysql.rds_set_source_auto_position_for_channel procedure. This procedure restarts replication on the specified channel to apply the specified auto position mode.

Examples

The following example sets the auto position mode for channel_1 to use the GTID-based replication method.

```
call mysql.rds_set_source_auto_position_for_channel(1,'channel_1');
```

mysql.rds_set_source_delay_for_channel

Sets the minimum number of seconds to delay replication from the source database instance to the multi-source replica for the specified channel.

Syntax

```
CALL mysql.rds_set_source_delay_for_channel(delay, channel_name);
```

Parameters

delay

The minimum number of seconds to delay replication from the source DB instance.

The limit for this parameter is one day (86400 seconds).

channel_name

The name of the replication channel on the multi-source replica. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_set_source_delay_for_channel` procedure. To use this procedure, first call `mysql.rds_stop_replication_for_channel` to stop the replication. Then, call this procedure to set the replication delay value. When the delay is set, call `mysql.rds_start_replication_for_channel` to restart the replication.

Examples

The following example sets the delay for replication from the source database instance on `channel_1` of the multi-source replica for at least one hour (3,600 seconds).

```
CALL mysql.rds_set_source_delay_for_channel(3600,'channel_1');
```

mysql.rds_skip_repl_error_for_channel

Skips a binary log event and deletes a replication error on a MySQL DB multi-source replica for the specified channel.

Syntax

```
CALL mysql.rds_skip_repl_error_for_channel(channel_name);
```

Parameters

channel_name

The name of the replication channel on the multi-source replica. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_skip_repl_error_for_channel` procedure on a read replica. You can use this procedure in a similar way `mysql.rds_skip_repl_error` is used to skip an error on a read replica.

> **Note**
>
> To skip errors in GTID-based replication, we recommend that you use the procedure the section called “mysql.rds_skip_transaction_with_gtid” instead.

To determine if there are errors, run the MySQL `SHOW REPLICA STATUS FOR CHANNEL 'channel_name'\G` command. If a replication error isn't critical, you can run `mysql.rds_skip_repl_error_for_channel` to skip the error. If there are multiple errors, `mysql.rds_skip_repl_error_for_channel` deletes the first error on the specified replication channel, then warns that others are present. You can then use `SHOW REPLICA STATUS FOR CHANNEL 'channel_name'\G` to determine the correct course of action for the next error. For information about the values returned, see SHOW REPLICA STATUS statement in the MySQL documentation.

mysql.rds_start_replication_for_channel

Initiates replication from an RDS for MySQL DB instance to a multi-source replica on the specified channel.

> **Note**
>
> You can use the mysql.rds_start_replication_until_for_channel or mysql.rds_start_replication_until_gtid_for_channel stored procedure to initiate replication from an RDS for MySQL DB instance and stop replication at the specified binary log file location.

Syntax

```
CALL mysql.rds_start_replication_for_channel(channel_name);
```

Parameters

channel_name

The name of the replication channel on the multi-source replica. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_start_replication_for_channel` procedure. After you import the data from the source RDS for MySQL DB instance, run this command on the multi-source replica to start replication on the specified channel.

Examples

The following example starts replication on `channel_1` of the multi-source replica.

```
CALL mysql.rds_start_replication_for_channel('channel_1');
```

mysql.rds_start_replication_until_for_channel

Initiates replication from an RDS for MySQL DB instance on the specified channel and stops replication at the specified binary log file location.

Syntax

```
CALL mysql.rds_start_replication_until_for_channel (
replication_log_file
  , replication_stop_point
  , channel_name
);
```

Parameters

replication_log_file

The name of the binary log on the source DB instance contains the replication information.

replication_stop_point

The location in the `replication_log_file` binary log at which replication will stop.

channel_name

The name of the replication channel on the multi-source replica. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_start_replication_until_for_channel` procedure. With this procedure, replication starts and then stops when the specified binlog file position is reached. This procedure stops both the `SQL_THREAD` and `IO_THREAD`.

The file name specified for the `replication_log_file` parameter must match the source DB instance binlog file name.

When the `replication_stop_point` parameter specifies a stop location that's in the past, replication is stopped immediately.

Examples

The following example initiates replication on `channel_1`, and replicates changes until it reaches location `120` in the `mysql-bin-changelog.000777` binary log file.

```
call mysql.rds_start_replication_until_for_channel(
  'mysql-bin-changelog.000777',
  120,
  'channel_1'
  );
```

mysql.rds_start_replication_until_gtid_for_channel

Initiates replication on the specified channel from an RDS for MySQL DB instance and stops replication at the specified global transaction identifier (GTID).

Syntax

```
CALL mysql.rds_start_replication_until_gtid_for_channel(gtid,channel_name);
```

Parameters

gtid

The GTID after which to stop replication.

channel_name

The name of the replication channel on the multi-source replica. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_start_replication_until_gtid_for_channel` procedure. The procedure starts replication on the specified channel and applies all changes up to the specified GTID value. Then, it stops replication on the channel.

When the `gtid` parameter specifies a transaction that has already been run by the replica, replication is stopped immediately.

Before you run this procedure, you must disable multi-threaded replication by setting the value of `replica_parallel_workers` or `slave_parallel_workers` to `0`.

Examples

The following example initiates replication on `channel_1`, and replicates changes until it reaches GTID `3E11FA47-71CA-11E1-9E33-C80AA9429562:23`.

```
call mysql.rds_start_replication_until_gtid_for_channel('3E11FA47-71CA-11E1-9E33-
C80AA9429562:23','channel_1');
```

mysql.rds_stop_replication_for_channel

Stops replication from a MySQL DB instance on the specified channel.

Syntax

```
CALL mysql.rds_stop_replication_for_channel(channel_name);
```

Parameters

channel_name

The name of the replication channel on the multi-source replica. Each replication channel receives the binary log events from a single source RDS for MySQL DB instance running on a specific host and port.

Usage notes

The master user must run the `mysql.rds_stop_replication_for_channel` procedure.

Examples

The following example stops replication on `channel_1` of the multi-source replica.

```
CALL mysql.rds_stop_replication_for_channel('channel_1');
```

Ending a session or query

The following stored procedures end a session or query.

Topics

- mysql.rds_kill
- mysql.rds_kill_query

mysql.rds_kill

Ends a connection to the MySQL server.

Syntax

```
CALL mysql.rds_kill(processID);
```

Parameters

processID

The identity of the connection thread to be ended.

Usage notes

Each connection to the MySQL server runs in a separate thread. To end a connection, use the `mysql.rds_kill` procedure and pass in the thread ID of that connection. To obtain the thread ID, use the MySQL SHOW PROCESSLIST command.

Examples

The following example ends a connection with a thread ID of 4243:

```
CALL mysql.rds_kill(4243);
```

mysql.rds_kill_query

Ends a query running against the MySQL server.

Syntax

```
CALL mysql.rds_kill_query(processID);
```

Parameters

processID

The identity of the process or thread that is running the query to be ended.

Usage notes

To stop a query running against the MySQL server, use the `mysql_rds_kill_query` procedure and pass in the connection ID of the thread that is running the query. The procedure then terminates the query, but leaves the connection itself intact.

To obtain the ID, query the MySQL INFORMATION_SCHEMA PROCESSLIST table or use the MySQL SHOW PROCESSLIST command. The value in the ID column from `SHOW PROCESSLIST` or `SELECT * FROM INFORMATION_SCHEMA.PROCESSLIST` is the *processID*.

Examples

The following example stops a query with a query thread ID of 230040:

```
CALL mysql.rds_kill_query(230040);
```

Replicating transactions using GTIDs

The following stored procedures control how transactions are replicated using global transaction identifiers (GTIDs) with Aurora MySQL. To learn how to use replication based on GTIDs with Aurora MySQL, see Using GTID-based replication.

Topics

- mysql.rds_assign_gtids_to_anonymous_transactions (Aurora MySQL version 3)
- mysql.rds_gtid_purged (Aurora MySQL version 3)
- mysql.rds_skip_transaction_with_gtid(Aurora MySQL version 2 and 3)
- mysql.rds_start_replication_until_gtid(Aurora MySQL version 3)

mysql.rds_assign_gtids_to_anonymous_transactions (Aurora MySQL version 3)

Configures the `ASSIGN_GTIDS_TO_ANONYMOUS_TRANSACTIONS` option of the `CHANGE REPLICATION SOURCE TO` statement. It makes the replication channel assign a GTID to replicated transactions that don't have one. That way, you can perform binary log replication from a source that doesn't use GTID-based replication to a replica that does. For more information, see CHANGE REPLICATION SOURCE TO Statement and Replication From a Source Without GTIDs to a Replica With GTIDs in the *MySQL Reference Manual*.

Syntax

```
CALL mysql.rds_assign_gtids_to_anonymous_transactions(gtid_option);
```

Parameters

`gtid_option`

String value. The allowed values are `OFF`, `LOCAL`, or a specified UUID.

Usage notes

This procedure has the same effect as issuing the statement `CHANGE REPLICATION SOURCE TO ASSIGN_GTIDS_TO_ANONYMOUS_TRANSACTIONS = gtid_option` in community MySQL.

GTID must be turned to `ON` for *`gtid_option`* to be set to `LOCAL` or a specific UUID.

The default is OFF, meaning that the feature isn't used.

LOCAL assigns a GTID including the replica's own UUID (the `server_uuid` setting).

Passing a parameter that is a UUID assigns a GTID that includes the specified UUID, such as the `server_uuid` setting for the replication source server.

Examples

To turn off this feature:

```
mysql> call mysql.rds_assign_gtids_to_anonymous_transactions('OFF');
+-------------------------------------------------------------+
| Message  |
+-------------------------------------------------------------+
| ASSIGN_GTIDS_TO_ANONYMOUS_TRANSACTIONS has been set to: OFF |
+-------------------------------------------------------------+
1 row in set (0.07 sec)
```

To use the replica's own UUID:

```
mysql> call mysql.rds_assign_gtids_to_anonymous_transactions('LOCAL');
+------------------------------------------------------------+
| Message  |
+------------------------------------------------------------+
| ASSIGN_GTIDS_TO_ANONYMOUS_TRANSACTIONS has been set to: LOCAL |
+------------------------------------------------------------+
1 row in set (0.07 sec)
```

To use a specified UUID:

```
mysql> call mysql.rds_assign_gtids_to_anonymous_transactions('317a4760-
f3dd-3b74-8e45-0615ed29de0e');
+-----------------------------------------------------------------------------------------------
+
| Message |
+-----------------------------------------------------------------------------------------------
+
| ASSIGN_GTIDS_TO_ANONYMOUS_TRANSACTIONS has been set to: 317a4760-
f3dd-3b74-8e45-0615ed29de0e |
+-----------------------------------------------------------------------------------------------
+
```

```
1 row in set (0.07 sec)
```

mysql.rds_gtid_purged (Aurora MySQL version 3)

Sets the global value of the system variable `gtid_purged` to a given global transaction identifier (GTID) set. The `gtid_purged` system variable is a GTID set that consists of the GTIDs of all transactions that have been committed on the server, but don't exist in any binary log file on the server.

To allow compatibility with MySQL 8.0, there are two ways to set the value of `gtid_purged`:

- Replace the value of `gtid_purged` with your specified GTID set.
- Append your specified GTID set to the GTID set that `gtid_purged` already contains.

Syntax

To replace the value of `gtid_purged` with your specified GTID set:

```
CALL mysql.rds_gtid_purged (gtid_set);
```

To append the value of `gtid_purged` to your specified GTID set:

```
CALL mysql.rds_gtid_purged (+gtid_set);
```

Parameters

`gtid_set`

The value of *`gtid_set`* must be a superset of the current value of `gtid_purged`, and can't intersect with `gtid_subtract(gtid_executed,gtid_purged)`. That is, the new GTID set must include any GTIDs that were already in `gtid_purged`, and can't include any GTIDs in `gtid_executed` that haven't yet been purged. The *`gtid_set`* parameter also can't include any GTIDs that are in the global `gtid_owned` set, the GTIDs for transactions that are currently being processed on the server.

Usage notes

The master user must run the `mysql.rds_gtid_purged` procedure.

This procedure is supported for Aurora MySQL version 3.04 and higher.

Examples

The following example assigns the GTID `3E11FA47-71CA-11E1-9E33-C80AA9429562:23` to the `gtid_purged` global variable.

```
CALL mysql.rds_gtid_purged('3E11FA47-71CA-11E1-9E33-C80AA9429562:23');
```

mysql.rds_skip_transaction_with_gtid(Aurora MySQL version 2 and 3)

Skips replication of a transaction with the specified global transaction identifier (GTID) on an Aurora primary instance.

You can use this procedure for disaster recovery when a specific GTID transaction is known to cause a problem. Use this stored procedure to skip the problematic transaction. Examples of problematic transactions include transactions that disable replication, delete important data, or cause the DB instance to become unavailable.

Syntax

```
CALL mysql.rds_skip_transaction_with_gtid (
gtid_to_skip
);
```

Parameters

`gtid_to_skip`

The GTID of the replication transaction to skip.

Usage notes

The master user must run the `mysql.rds_skip_transaction_with_gtid` procedure.

This procedure is supported for Aurora MySQL version 2 and 3.

Examples

The following example skips replication of the transaction with the GTID `3E11FA47-71CA-11E1-9E33-C80AA9429562:23`.

```
CALL mysql.rds_skip_transaction_with_gtid('3E11FA47-71CA-11E1-9E33-C80AA9429562:23');
```

mysql.rds_start_replication_until_gtid(Aurora MySQL version 3)

Initiates replication from an Aurora MySQL DB cluster and stops replication immediately after the specified global transaction identifier (GTID).

Syntax

```
CALL mysql.rds_start_replication_until_gtid(gtid);
```

Parameters

gtid

The GTID after which replication is to stop.

Usage notes

The master user must run the `mysql.rds_start_replication_until_gtid` procedure.

This procedure is supported for Aurora MySQL version 3.04 and higher.

The `mysql.rds_start_replication_until_gtid` stored procedure isn't supported for managed replication, which includes the following:

- Replicating Amazon Aurora MySQL DB clusters across Amazon Web Services Regions
- Migrating data from an RDS for MySQL DB instance to an Amazon Aurora MySQL DB cluster by using an Aurora read replica

When the `gtid` parameter specifies a transaction that has already been run by the replica, replication is stopped immediately.

Examples

The following example initiates replication and replicates changes until it reaches GTID `3E11FA47-71CA-11E1-9E33-C80AA9429562:23`.

```
call mysql.rds_start_replication_until_gtid('3E11FA47-71CA-11E1-9E33-C80AA9429562:23');
```

Rotating the query logs

The following stored procedures rotate MySQL logs to backup tables. For more information, see AuroraMySQL database log files.

Topics

- mysql.rds_rotate_general_log
- mysql.rds_rotate_slow_log

mysql.rds_rotate_general_log

Rotates the `mysql.general_log` table to a backup table.

Syntax

```
CALL mysql.rds_rotate_general_log;
```

Usage notes

You can rotate the `mysql.general_log` table to a backup table by calling the `mysql.rds_rotate_general_log` procedure. When log tables are rotated, the current log table is copied to a backup log table and the entries in the current log table are removed. If a backup log table already exists, then it is deleted before the current log table is copied to the backup. You can query the backup log table if needed. The backup log table for the `mysql.general_log` table is named `mysql.general_log_backup`.

You can run this procedure only when the `log_output` parameter is set to `TABLE`.

mysql.rds_rotate_slow_log

Rotates the `mysql.slow_log` table to a backup table.

Syntax

```
CALL mysql.rds_rotate_slow_log;
```

Usage notes

You can rotate the `mysql.slow_log` table to a backup table by calling the `mysql.rds_rotate_slow_log` procedure. When log tables are rotated, the current log table is copied to a backup log table and the entries in the current log table are removed. If a backup log table already exists, then it is deleted before the current log table is copied to the backup.

You can query the backup log table if needed. The backup log table for the `mysql.slow_log` table is named `mysql.slow_log_backup`.

Setting and showing binary log configuration

The following stored procedures set and show configuration parameters, such as for binary log file retention.

Topics

- mysql.rds_set_configuration
- mysql.rds_show_configuration

mysql.rds_set_configuration

Specifies the number of hours to retain binary logs or the number of seconds to delay replication.

Syntax

```
CALL mysql.rds_set_configuration(name,value);
```

Parameters

name

The name of the configuration parameter to set.

value

The value of the configuration parameter.

Usage notes

The `mysql.rds_set_configuration` procedure supports the following configuration parameters:

- binlog retention hours

The configuration parameters are stored permanently and survive any DB instance reboot or failover.

binlog retention hours

The `binlog retention hours` parameter is used to specify the number of hours to retain binary log files. Amazon Aurora normally purges a binary log as soon as possible, but the binary log might still be required for replication with a MySQL database external to Aurora.

The default value of `binlog retention hours` is `NULL`. For Aurora MySQL, `NULL` means binary logs are cleaned up lazily. Aurora MySQL binary logs might remain in the system for a certain period, which is usually not longer than a day.

To specify the number of hours to retain binary logs on a DB cluster, use the `mysql.rds_set_configuration` stored procedure and specify a period with enough time for replication to occur, as shown in the following example.

```
call mysql.rds_set_configuration('binlog retention hours', 24);
```

> **Note**
>
> You can't use the value `0` for `binlog retention hours`.

For Aurora MySQL version 2.11.0 and higher and version 3 DB clusters, the maximum `binlog retention hours` value is 2160 (90 days).

After you set the retention period, monitor storage usage for the DB instance to make sure that the retained binary logs don't take up too much storage.

mysql.rds_show_configuration

The number of hours that binary logs are retained.

Syntax

```
CALL mysql.rds_show_configuration;
```

Usage notes

To verify the number of hours that Amazon RDS retains binary logs, use the `mysql.rds_show_configuration` stored procedure.

Examples

The following example displays the retention period:

```
call mysql.rds_show_configuration;
                name                          value     description
                binlog retention hours        24        binlog retention hours specifies
 the duration in hours before binary logs are automatically deleted.
```

Aurora MySQL–specific information_schema tables

Aurora MySQL has certain `information_schema` tables that are specific to Aurora.

information_schema.aurora_global_db_instance_status

The `information_schema.aurora_global_db_instance_status` table contains information about the status of all DB instances in a global database's primary and secondary DB clusters. The following table shows the columns that you can use. The remaining columns are for Aurora internal use only.

> **Note**
>
> This information schema table is only available with Aurora MySQL version 3.04.0 and higher global databases.

Column	Data type	Description
SERVER_ID	varchar(100)	The identifier of the DB instance.
SESSION_ID	varchar(100)	A unique identifier for the current session. A value of `MASTER_SESSION_ID` identifies the Writer (primary) DB instance.
AWS_REGION	varchar(100)	The Amazon Web Services Region in which this global

Column	Data type	Description
		database instance runs. For a list of Regions, see Region availability.
DURABLE_LSN	bigint unsigned	The log sequence number (LSN) made durable in storage. A log sequence number (LSN) is a unique sequential number that identifies a record in the database transaction log. LSNs are ordered such that a larger LSN represents a later transaction.
HIGHEST_LSN_RCVD	bigint unsigned	The highest LSN received by the DB instance from the writer DB instance.
OLDEST_READ_VIEW_TRX_ID	bigint unsigned	The ID of the oldest transacti on that the writer DB instance can purge to.
OLDEST_READ_VIEW_LSN	bigint unsigned	The oldest LSN used by the DB instance to read from storage.
VISIBILITY_LAG_IN_MSEC	float(10,0) unsigned	For readers in the primary DB cluster, how far this DB instance is lagging behind the writer DB instance in milliseconds. For readers in a secondary DB cluster, how far this DB instance is lagging behind the secondary volume in milliseconds.

information_schema.aurora_global_db_status

The `information_schema.aurora_global_db_status` table contains information about various aspects of Aurora global database lag, specifically, lag of the underlying Aurora storage (so called durability lag) and lag between the recovery point objective (RPO). The following table shows the columns that you can use. The remaining columns are for Aurora internal use only.

> **Note**
>
> This information schema table is only available with Aurora MySQL version 3.04.0 and higher global databases.

Column	Data type	Description
AWS_REGION	varchar(100)	The Amazon Web Services Region in which this global database instance runs. For a list of Regions, see Region availability.
HIGHEST_LSN_WRITTEN	bigint unsigned	The highest log sequence number (LSN) that currently exists on this DB cluster. A log sequence number (LSN) is a unique sequential number that identifies a record in the database transaction log. LSNs are ordered such that a larger LSN represents a later transaction.
DURABILITY_LAG_IN_MILLISECONDS	float(10,0) unsigned	The difference in the timestamp values between the `HIGHEST_LSN_WRITTEN` on a secondary DB cluster and the `HIGHEST_LSN_WRITTEN` on the

Column	Data type	Description
		primary DB cluster. This value is always 0 on the primary DB cluster of the Aurora global database.
RPO_LAG_IN_MILLISECONDS	float(10,0) unsigned	The recovery point objective (RPO) lag. The RPO lag is the time it takes for the most recent user transaction COMMIT to be stored on a secondary DB cluster after it's been stored on the primary DB cluster of the Aurora global database. This value is always 0 on the primary DB cluster of the Aurora global database. In simple terms, this metric calculates the recovery point objective for each Aurora MySQL DB cluster in the Aurora global database, that is, how much data might be lost if there were an outage. As with lag, RPO is measured in time.

Column	Data type	Description
LAST_LAG_CALCULATION_TIMESTAMP	datetime	The timestamp that specifies when values were last calculated for `DURABILITY_LAG_IN_MILLISECONDS` and `RPO_LAG_IN_MILLISECONDS`. A time value such as `1970-01-01 00:00:00+00` means this is the primary DB cluster.
OLDEST_READ_VIEW_TRX_ID	bigint unsigned	The ID of the oldest transaction that the writer DB instance can purge to.

information_schema.replica_host_status

The `information_schema.replica_host_status` table contains replication information. The columns that you can use are shown in the following table. The remaining columns are for Aurora internal use only.

Column	Data type	Description
CPU	double	The CPU percentage usage of the replica host.
IS_CURRENT	tinyint	Whether the replica is current.
LAST_UPDATE_TIMESTAMP	datetime(6)	The time the last update occurred. Used to determine whether a record is stale.
REPLICA_LAG_IN_MILLISECONDS	double	The replica lag in milliseconds.
SERVER_ID	varchar(100)	The ID of the database server.

Column	Data type	Description
SESSION_ID	varchar(100)	The ID of the database session. Used to determine whether a DB instance is a writer or reader instance.

Note

When a replica instance falls behind, the information queried from its `information_schema.replica_host_status` table might be outdated. In this situation, we recommend that you query from the writer instance instead.
While the `mysql.ro_replica_status` table has similar information, we don't recommend that you use it.

information_schema.aurora_forwarding_processlist

The `information_schema.aurora_forwarding_processlist` table contains information about processes involved in write forwarding.

The contents of this table are visible only on the writer DB instance for a DB cluster with global or in-cluster write forwarding turned on. An empty result set is returned on reader DB instances.

Field	Data type	Description
ID	bigint	The identifier of the connection on the writer DB instance. This identifier is the same value displayed in the `Id` column of the `SHOW PROCESSLIST` statement and returned by the `CONNECTION_ID()` function within the thread.
USER	varchar(32)	The MySQL user that issued the statement.
HOST	varchar(255)	The MySQL client that issued the statement. For forwarded statements, this field shows the application client host

Field	Data type	Description
		address that established the connection on the forwarding reader DB instance.
DB	varchar(64)	The default database for the thread.
COMMAND	varchar(16)	The type of command the thread is executing on behalf of the client, or `Sleep` if the session is idle. For descriptions of thread commands, see the MySQL documentation on Thread Command Values in the MySQL documentation.
TIME	int	The time in seconds that the thread has been in its current state.
STATE	varchar(64)	An action, event, or state that indicates what the thread is doing. For descriptions of state values, see General Thread States in the MySQL documentation.
INFO	longtext	The statement that the thread is executing, or `NULL` if it isn't executing a statement. The statement might be the one sent to the server, or an innermost statement if the statement executes other statements.
IS_FORWARDED	bigint	Indicates whether the thread is forwarded from a reader DB instance.
REPLICA_SESSION_ID	bigint	The connection identifier on the Aurora Replica. This identifier is the same value displayed in the `Id` column of the `SHOW PROCESSLIST` statement on the forwarding Aurora reader DB instance.
REPLICA_INSTANCE_IDENTIFIER	varchar(64)	The DB instance identifier of the forwarding thread.

Field	Data type	Description
REPLICA_CLUSTER_NAME	varchar(64)	The DB cluster identifier of the forwarding thread. For in-cluster write forwarding, this identifier is the same DB cluster as the writer DB instance.
REPLICA_REGION	varchar(64)	The Amazon Web Services Region from which the forwarding thread originates. For in-cluster write forwarding, this Region is the same Amazon Web Services Region as the writer DB instance.

Database engine updates for Amazon Aurora MySQL

Amazon Aurora releases updates regularly. Updates are applied to Aurora DB clusters during system maintenance windows. The timing when updates are applied depends on the region and maintenance window setting for the DB cluster, as well as the type of update.

Amazon Aurora releases are made available to all Amazon Regions over the course of multiple days. Some Regions might temporarily show an engine version that isn't available in a different Region yet.

Updates are applied to all instances in a DB cluster at the same time. An update requires a database restart on all instances in a DB cluster, so you experience 20 to 30 seconds of downtime, after which you can resume using your DB cluster or clusters. You can view or change your maintenance window settings from the Amazon Web Services Management Console.

For details about the Aurora MySQL versions that are supported by Amazon Aurora, see the *Release Notes for Aurora MySQL*.

Following, you can learn how to choose the right Aurora MySQL version for your cluster, how to specify the version when you create or upgrade a cluster, and the procedures to upgrade a cluster from one version to another with minimal interruption.

Topics

- Checking Aurora MySQL version numbers
- Long-term support (LTS) and beta releases for Amazon Aurora MySQL
- Preparing for Amazon Aurora MySQL-Compatible Edition version 2 end of standard support
- Preparing for Amazon Aurora MySQL-Compatible Edition version 1 end of life
- Upgrading Amazon Aurora MySQL DB clusters
- Database engine updates and fixes for Amazon Aurora MySQL

Checking Aurora MySQL version numbers

Although Aurora MySQL-Compatible Edition is compatible with the MySQL database engines, Aurora MySQL includes features and bug fixes that are specific to particular Aurora MySQL versions. Application developers can check the Aurora MySQL version in their applications by using SQL. Database administrators can check and specify Aurora MySQL versions when creating or upgrading Aurora MySQL DB clusters and DB instances.

Topics

- Checking or specifying Aurora MySQL engine versions through Amazon
- Checking Aurora MySQL versions using SQL

Checking or specifying Aurora MySQL engine versions through Amazon

When you perform administrative tasks using the Amazon Web Services Management Console, Amazon CLI, or RDS API, you specify the Aurora MySQL version in a descriptive alphanumeric format.

For Aurora MySQL version 2 and version 3, Aurora engine versions have the following syntax.

```
mysql-major-version.mysql_aurora.aurora-mysql-version
```

The *mysql-major-version-* portion is `5.7` or `8.0`. This value represents the version of the client protocol and general level of MySQL feature support for the corresponding Aurora MySQL version.

The *aurora-mysql-version* is a dotted value with three parts: the Aurora MySQL major version, the Aurora MySQL minor version, and the patch level. The major version is 2 or 3. Those values represent Aurora MySQL compatible with MySQL 5.7 or 8.0, respectively. The minor version represents the feature release within the 2.x or 3.x series. The patch level begins at `0` for each minor version, and represents the set of subsequent bug fixes that apply to the minor version. Occasionally, a new feature is incorporated into a minor version but not made visible immediately. In these cases, the feature undergoes fine-tuning and is made public in a later patch level.

All 2.x Aurora MySQL engine versions are wire-compatible with Community MySQL 5.7.12 or higher. All 3.x Aurora MySQL engine versions are wire-compatible with MySQL 8.0.23 or higher. You can refer to release notes of the specific 3.x version to find the corresponding MySQL compatible version.

For example, the engine versions for Aurora MySQL 3.04.0 and 2.11.2 are the following.

```
8.0.mysql_aurora.3.04.0
5.7.mysql_aurora.2.11.2
```

Starting with Aurora MySQL version 8.4, the engine version format is simplified. The version number uses a *major-version*.*minor-version* scheme, where the major version (such as `8.4`)

represents MySQL compatibility and the minor version represents the feature and bug fix release. There is no separate patch level visible to customers, and the Aurora version number directly matches the MySQL compatibility version without a separate internal-to-external version mapping.

```
mysql-major-version.mysql_aurora.major-version.minor-version
```

For example, the engine version for Aurora MySQL 8.4.7 is the following.

```
8.4.mysql_aurora.8.4.7
```

Note

There isn't a one-to-one correspondence between community MySQL versions and the Aurora MySQL 2.x versions. For Aurora MySQL version 3, there is a more direct mapping. Starting with Aurora MySQL version 8.4, the Aurora version number directly matches the MySQL compatibility version. To check which bug fixes and new features are in a particular Aurora MySQL release, see Database engine updates for Amazon Aurora MySQL version 3 and Database engine updates for Amazon Aurora MySQL version 2 in the *Release Notes for Aurora MySQL*. For a chronological list of new features and releases, see Document history. To check the minimum version required for a security-related fix, see Security vulnerabilities fixed in Aurora MySQLin the *Release Notes for Aurora MySQL*.

You specify the Aurora MySQL engine version in some Amazon CLI commands and RDS API operations. For example, you specify the `--engine-version` option when you run the Amazon CLI commands create-db-cluster and modify-db-cluster. You specify the `EngineVersion` parameter when you run the RDS API operations CreateDBCluster and ModifyDBCluster.

In Aurora MySQL version 2 and higher, the engine version in the Amazon Web Services Management Console also includes the Aurora version. Upgrading the cluster changes the displayed value. This change helps you to specify and check the precise Aurora MySQL versions, without the need to connect to the cluster or run any SQL commands.

Tip

For Aurora clusters managed through Amazon CloudFormation, this change in the `EngineVersion` setting can trigger actions by Amazon CloudFormation. For information

about how Amazon CloudFormation treats changes to the `EngineVersion` setting, see the Amazon CloudFormation documentation.

Checking Aurora MySQL versions using SQL

The Aurora version numbers that you can retrieve in your application using SQL queries use the format *<major version>*.*<minor version>*.*<patch version>* for version 2 and version 3. For version 8.4 and higher, the format is *<major version>*.*<minor version>* (for example, `8.4.7`), where the major version such as `8.4` represents MySQL compatibility. You can get this version number for any DB instance in your Aurora MySQL cluster by querying the `AURORA_VERSION` system variable. To get this version number, use one of the following queries.

```
select aurora_version();
select @@aurora_version;
```

For version 2 and version 3, the output looks similar to the following.

```
mysql> select aurora_version(), @@aurora_version;
+------------------+------------------+
| aurora_version() | @@aurora_version |
+------------------+------------------+
| 3.05.2           | 3.05.2           |
+------------------+------------------+
```

For version 8.4 and higher, the output uses the simplified numbering scheme.

```
mysql> select aurora_version(), @@aurora_version;
+------------------+------------------+
| aurora_version() | @@aurora_version |
+------------------+------------------+
| 8.4.7            | 8.4.7            |
+------------------+------------------+
```

The version numbers that the console, CLI, and RDS API return by using the techniques described in Checking or specifying Aurora MySQL engine versions through Amazon are typically more descriptive.

Long-term support (LTS) and beta releases for Amazon Aurora MySQL

Aurora MySQL provides long-term support (LTS) and beta releases for some Aurora MySQL engine versions.

Topics

- Aurora MySQL long-term support (LTS) releases
- Aurora MySQL beta releases

Aurora MySQL long-term support (LTS) releases

Each new Aurora MySQL version remains available for a certain amount of time for you to use when you create or upgrade a DB cluster. After this period, you must upgrade any clusters that use that version. You can manually upgrade your cluster before the support period ends, or Aurora can automatically upgrade it for you when its Aurora MySQL version is no longer supported.

Aurora designates certain Aurora MySQL versions as long-term support (LTS) releases. DB clusters that use LTS releases can stay on the same version longer and undergo fewer upgrade cycles than clusters that use non-LTS releases. Database clusters that use LTS releases can stay on the same minor version for at least three years, or until end of standard support for the major version, whichever comes first.

During the lifetime of an Aurora MySQL LTS release, new patch levels introduce fixes to important issues. The patch levels don't include any new features. You can choose whether to apply such patches to DB clusters running the LTS release. We recommend customers running LTS releases to upgrade to the latest patch release of the LTS minor version at least once a year to take advantage of high severity security and operational fixes. For certain critical fixes, Amazon might perform a managed upgrade to a patch level within the same LTS release. Such managed upgrades are performed automatically within the cluster maintenance window. All Aurora MySQL releases (both LTS and non-LTS releases) undergo extensive stability and operational testing. Select minor versions are designated as LTS releases to enable customers to stay on those minor versions longer without upgrading to a newer minor version.

We recommend that you upgrade to the latest release, instead of using the LTS release, for most of your Aurora MySQL clusters. Doing so takes advantage of Aurora as a managed service and gives you access to the latest features and bug fixes. The LTS releases are intended for clusters with the following characteristics:

- You can't afford downtime on your Aurora MySQL application for upgrades outside of rare occurrences for critical patches.
- The testing cycle for the cluster and associated applications takes a long time for each update to the Aurora MySQL database engine.
- The database version for your Aurora MySQL cluster has all the DB engine features and bug fixes that your application needs.

The current LTS releases for Aurora MySQL are as follows:

- Aurora MySQL version 3.10.*.
- Aurora MySQL version 3.04.*.

For more details about the LTS version, see Database engine updates for Amazon Aurora MySQL version 3 in the *Release Notes for Aurora MySQL*.

> **Note**
>
> We recommend that you disable automatic minor version upgrades for LTS versions. Set the `AutoMinorVersionUpgrade` parameter to `false`, or clear the **Enable auto minor version upgrade** check box on the Amazon Web Services Management Console.
> If you don't disable it, your DB cluster could be upgraded to a non-LTS version.

Aurora MySQL beta releases

An Aurora MySQL beta release is an early, security fix–only release in a limited number of Amazon Web Services Regions. These fixes are later deployed more broadly across all Regions with the next patch release.

The numbering for a beta release is similar to an Aurora MySQL minor version, but with an extra fourth digit, for example 2.12.0.1 or 3.05.0.1. For Aurora MySQL version 8.4 and higher, a beta release adds an extra digit to the minor version, for example 8.4.7.1.

For more information, see Database engine updates for Amazon Aurora MySQL version 2 and Database engine updates for Amazon Aurora MySQL version 3 in the *Release Notes for Aurora MySQL*.

Preparing for Amazon Aurora MySQL-Compatible Edition version 2 end of standard support

Amazon Aurora MySQL-Compatible Edition version 2 (with MySQL 5.7 compatibility) is planned to reach the end of standard support on October 31, 2024. We recommend that you upgrade all clusters running Aurora MySQL version 2 to the default Aurora MySQL version 3 (with MySQL 8.0 compatibility) or higher before Aurora MySQL version 2 reaches the end of its standard support period. On October 31, 2024, Amazon RDS will automatically enroll your databases into Amazon RDS Extended Support.

You can find upcoming end-of-support dates for Aurora MySQL major versions in *Release calendar for Aurora MySQL major versions*.

If you have clusters running Aurora MySQL version 2, you will receive periodic notices with the latest information about how to conduct an upgrade as we get closer to the end of standard support date. We will update this page periodically with the latest information.

End of standard support timeline

1. Now through October 31, 2024 – You can upgrade clusters from Aurora MySQL version 2 (with MySQL 5.7 compatibility) to Aurora MySQL version 3 (with MySQL 8.0 compatibility).
2. October 31, 2024 – On this date, Aurora MySQL version 2 will reach the end of standard support and Amazon RDS automatically enrolls your clusters into Amazon RDS Extended Support.

We will automatically enroll you in RDS Extended Support. For more information, see Amazon RDS Extended Support with Amazon Aurora.

Finding clusters affected by this end-of-life process

To find clusters affected by this end-of-life process, use the following procedures.

> **Important**
>
> Be sure to perform these instructions in every Amazon Web Services Region and for each Amazon Web Services account where your resources are located.

Console

To find an Aurora MySQL version 2 cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. In the **Filter by databases** box, enter **5.7**.
4. Check for Aurora MySQL in the engine column.

Amazon CLI

To find clusters affected by this end-of-life process using the Amazon CLI, call the describe-db-clusters command. You can use the sample script following.

Example

```
aws rds describe-db-clusters --include-share --query 'DBClusters[?(Engine==`aurora-
mysql` && contains(EngineVersion,`5.7.mysql_aurora`))].{EngineVersion:EngineVersion,
 DBClusterIdentifier:DBClusterIdentifier, EngineMode:EngineMode}' --output table
 --region us-east-1
```

```
+-----------------------------------------------------------------+
|                       DescribeDBClusters                        |
+---------------------+---------------+-------------------------+
|         DBCI        |      EM       |          EV             |
+---------------------+---------------+-------------------------+
|    aurora-mysql2    |  provisioned  | 5.7.mysql_aurora.2.11.3 |
| aurora-serverlessv1 |   serverless  | 5.7.mysql_aurora.2.11.3 |
+---------------------+---------------+-------------------------+
```

RDS API

To find Aurora MySQL DB clusters running Aurora MySQL version 2, use the RDS DescribeDBClusters API operation with the following required parameters:

- `DescribeDBClusters`
  - Filters.Filter.N
    - Name

    - engine
- Values.Value.N
    - ['aurora']

Amazon RDS Extended Support

You can use Amazon RDS Extended Support over community MySQL 5.7 at no charge until the end of support date, October 31, 2024. On October 31, 2024, Amazon RDS automatically enrolls your databases into RDS Extended Support for Aurora MySQL version 2. RDS Extended Support for Aurora is a paid service that provides up to 28 additional months of support for Aurora MySQL version 2 until the end of RDS Extended Support in February 2027. RDS Extended Support will only be offered for Aurora MySQL minor versions 2.11 and 2.12. To use Amazon Aurora MySQL version 2 past the end of standard support, plan to run your databases on one of these minor versions before October 31, 2024.

For more information about RDS Extended Support, such as charges and other considerations, see Amazon RDS Extended Support with Amazon Aurora.

Performing an upgrade

Upgrading between major versions requires more extensive planning and testing than for a minor version. The process can take substantial time. We want to look at the upgrade as a three-step process, with activities before the upgrade, for the upgrade, and after the upgrade.

Before the upgrade:

Before the upgrade, we recommend that you check for application compatibility, performance, maintenance procedures, and similar considerations for the upgraded cluster, thereby confirming that post-upgrade your applications will work as expected. Here are five recommendations that will help provide you a better upgrade experience.

- First, it's critical to understand How the Aurora MySQL in-place major version upgrade works.
- Next, explore the upgrade techniques that are available when Upgrading from Aurora MySQL version 2 to version 3.
- To help you decide the right time and approach to upgrade, you can learn the differences between Aurora MySQL version 3 and your current environment with Comparing Aurora MySQL version 2 and Aurora MySQL version 3.

- After you've decided on the option that's convenient and works best, try a mock in-place upgrade on a cloned cluster, using Planning a major version upgrade for an Aurora MySQL cluster.
- Review the Major version upgrade prechecks for Aurora MySQL. The upgrade prechecker can run and determine whether your database can be upgraded successfully, and if there are any application incompatibility issues post-upgrade as well as performance, maintenance procedures, and similar considerations.
- Not all kinds or versions of Aurora MySQL clusters can use the in-place upgrade mechanism. For more information, see Aurora MySQL major version upgrade paths.

If you have any questions or concerns, the Amazon Support Team is available on the community forums and Premium Support.

Doing the upgrade:

You can use one of the following upgrade techniques. The amount of downtime your system will experience depends on the technique chosen.

- **Blue/Green Deployments** – For situations where the top priority is to reduce application downtime, you can use Amazon RDS Blue/Green Deployments for performing the major version upgrade in provisioned Amazon Aurora DB clusters. A blue/green deployment creates a staging environment that copies the production environment. You can make certain changes to the Aurora DB cluster in the green (staging) environment without affecting production workloads. The switchover typically takes under a minute with no data loss. For more information, see Overview of Amazon Aurora Blue/Green Deployments. This minimizes downtime, but requires you to run additional resources while performing the upgrade.
- **In-place upgrades** – You can perform an in-place upgrade where Aurora automatically performs a precheck process for you, takes the cluster offline, backs up your cluster, performs the upgrade, and puts your cluster back online. An in-place major version upgrade can be performed in a few clicks, and doesn't involve other coordination or failovers with other clusters, but does involve downtime. For more information, see How to perform an in-place upgrade
- **Snapshot restore** – You can upgrade your Aurora MySQL version 2 cluster by restoring from an Aurora MySQL version 2 snapshot into an Aurora MySQL version 3 cluster. To do this, you should follow the process for taking a snapshot and restoring from it. This process involves database interruption because you're restoring from a snapshot.

After the upgrade:

After the upgrade, you need to closely monitor your system (application and database) and make fine-tuning changes if necessary. Following the pre-upgrade steps closely will minimize the required changes needed. For more information, see Troubleshooting Amazon Aurora MySQL database performance.

To learn more about the methods, planning, testing, and troubleshooting of Aurora MySQL major version upgrades, be sure to thoroughly read Upgrading the major version of an Amazon Aurora MySQL DB cluster, including Troubleshooting for Aurora MySQL in-place upgrade. Also, note that some instance types aren't supported for Aurora MySQL version 3. For more information, see Amazon AuroraDB instance classes.

Preparing for Amazon Aurora MySQL-Compatible Edition version 1 end of life

Amazon Aurora MySQL-Compatible Edition version 1 (with MySQL 5.6 compatibility) is planned to reach end of life on February 28, 2023. Amazon advises that you upgrade all clusters (provisioned and Aurora Serverless) running Aurora MySQL version 1 to Aurora MySQL version 2 (with MySQL 5.7 compatibility) or Aurora MySQL version 3 (with MySQL 8.0 compatibility) or higher. Do this before Aurora MySQL version 1 reaches the end of its support period.

For Aurora provisioned DB clusters, you can complete upgrades from Aurora MySQL version 1 to Aurora MySQL version 2 by several methods. You can find instructions for the in-place upgrade mechanism in How to perform an in-place upgrade. Another way to complete the upgrade is to take a snapshot of an Aurora MySQL version 1 cluster and restore the snapshot to an Aurora MySQL version 2 cluster. Or you can follow a multistep process that runs the old and new clusters side by side. For more details about each method, see Upgrading the major version of an Amazon Aurora MySQL DB cluster.

For Aurora provisioned DB clusters, you can complete upgrades from Aurora MySQL version 1 to Aurora MySQL version 3 by using a two-stage upgrade process:

1. Upgrade from Aurora MySQL version 1 to Aurora MySQL version 2 using the methods described preceding.
2. Upgrade from Aurora MySQL version 2 to Aurora MySQL version 3 using the same methods as for upgrading from version 1 to version 2. For more details, see Upgrading from Aurora MySQL version 2 to version 3. Note the Feature differences between Aurora MySQL version 2 and 3.

You can find upcoming end-of-life dates for Aurora major versions in Amazon Aurora versions. Amazon automatically upgrades any clusters that you don't upgrade yourself before the end-of-life date. After the end-of-life date, these automatic upgrades to the subsequent major version occur during a scheduled maintenance window for clusters.

The following are additional milestones for upgrading Aurora MySQL version 1 clusters (provisioned and Aurora Serverless) that are reaching end of life. For each, the start time is 00:00 Universal Coordinated Time (UTC).

1. Now through February 28, 2023 – You can at any time start upgrades of Aurora MySQL version 1 (with MySQL 5.6 compatibility) clusters to Aurora MySQL version 2 (with MySQL 5.7 compatibility). From Aurora MySQL version 2, you can do a further upgrade to Aurora MySQL version 3 (with MySQL 8.0 compatibility) for Aurora provisioned DB clusters.
2. January 16, 2023 – After this time, you can't create new Aurora MySQL version 1 clusters or instances from either the Amazon Web Services Management Console or the Amazon Command Line Interface (Amazon CLI). You also can't add new secondary Regions to an Aurora global database. This might affect your ability to recover from an unplanned outage as outlined in Recovering an Amazon Aurora global database from an unplanned outage, because you can't complete steps 5 and 6 after this time. You will also be unable to create a new cross-Region read replica running Aurora MySQL version 1. You can still do the following for existing Aurora MySQL version 1 clusters until February 28, 2023:
   - Restore a snapshot taken of an Aurora MySQL version 1 cluster to the same version as the original snapshot cluster.
   - Add read replicas (not applicable for Aurora Serverless DB clusters).
   - Change instance configuration.
   - Perform point-in-time restore.
   - Create clones of existing version 1 clusters.
   - Create a new cross-Region read replica running Aurora MySQL version 2 or higher.
3. February 28, 2023 – After this time, we plan to automatically upgrade Aurora MySQL version 1 clusters to the default version of Aurora MySQL version 2 within a scheduled maintenance window that follows. Restoring Aurora MySQL version 1 DB snapshots results in an automatic upgrade of the restored cluster to the default version of Aurora MySQL version 2 at that time.

Upgrading between major versions requires more extensive planning and testing than for a minor version. The process can take substantial time.

For situations where the top priority is to reduce downtime, you can also use blue/green deployments for performing the major version upgrade in provisioned Amazon Aurora DB clusters. A blue/green deployment creates a staging environment that copies the production environment. You can make changes to the Aurora DB cluster in the green (staging) environment without affecting production workloads. The switchover typically takes under a minute with no data loss and no need for application changes. For more information, see Overview of Amazon Aurora Blue/Green Deployments.

After the upgrade is finished, you also might have follow-up work to do. For example, you might need to follow up due to differences in SQL compatibility, the way certain MySQL-related features work, or parameter settings between the old and new versions.

To learn more about the methods, planning, testing, and troubleshooting of Aurora MySQL major version upgrades, be sure to thoroughly read Upgrading the major version of an Amazon Aurora MySQL DB cluster.

Finding clusters affected by this end-of-life process

To find clusters affected by this end-of-life process, use the following procedures.

> **Important**
>
> Be sure to perform these instructions in every Amazon Web Services Region and for each Amazon Web Services account where your resources are located.

Console

To find an Aurora MySQL version 1 cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. In the **Filter by databases** box, enter **5.6**.
4. Check for Aurora MySQL in the engine column.

Amazon CLI

To find clusters affected by this end-of-life process using the Amazon CLI, call the describe-db-clusters command. You can use the sample script following.

Example

```
aws rds describe-db-clusters --include-share --query 'DBClusters[?Engine==`aurora`].
{EV:EngineVersion, DBCI:DBClusterIdentifier, EM:EngineMode}' --output table --region
 us-east-1

        +-----------------------------------------+
        |            DescribeDBClusters           |
        +---------------+--------------+----------+
        |     DBCI      |     EM       |    EV    |
        +---------------+--------------+----------+
        |  my-database-1|  serverless  |  5.6.10a |
        +---------------+--------------+----------+
```

RDS API

To find Aurora MySQL DB clusters running Aurora MySQL version 1, use the RDS DescribeDBClusters API operation with the following required parameters:

- `DescribeDBClusters`
  - Filters.Filter.N
    - Name
      - engine
    - Values.Value.N
      - ['aurora']

Upgrading Amazon Aurora MySQL DB clusters

You can upgrade an Aurora MySQL DB cluster to get bug fixes, new Aurora MySQL features, or to change to an entirely new version of the underlying database engine. The following sections show how.

Note

The type of upgrade that you do depends on how much downtime you can afford for your cluster, how much verification testing you plan to do, how important the specific bug fixes or new features are for your use case, and whether you plan to do frequent small upgrades or occasional upgrades that skip several intermediate versions. For each upgrade, you can change the major version, the minor version, and the patch level for your cluster. If you aren't familiar with the distinction between Aurora MySQL major versions, minor versions, and patch levels, you can read the background information at Checking Aurora MySQL version numbers.

Tip

You can minimize the downtime required for a DB cluster upgrade by using a blue/green deployment. For more information, see Using Amazon Aurora Blue/Green Deployments for database updates.

Topics

- Upgrading the minor version or patch level of an Aurora MySQL DB cluster
- Upgrading the major version of an Amazon Aurora MySQL DB cluster

Upgrading the minor version or patch level of an Aurora MySQL DB cluster

You can use the following methods to upgrade the minor version of a DB cluster or to patch a DB cluster:

- Upgrading Aurora MySQL by modifying the engine version (for Aurora MySQL version 2, version 3, and version 8.4)
- Enabling automatic upgrades between minor Aurora MySQL versions

For information about how zero-downtime patching can reduce interruptions during the upgrade process, see Using zero-downtime patching.

For information about performing a minor version upgrade for your Aurora MySQL DB cluster, see the following topics.

Topics

- Before performing a minor version upgrade
- Minor version upgrade prechecks for Aurora MySQL
- Upgrading Aurora MySQL by modifying the engine version
- Enabling automatic upgrades between minor Aurora MySQL versions
- Using zero-downtime patching
- Alternative blue/green upgrade technique

Before performing a minor version upgrade

We recommend that you perform the following actions to reduce the downtime during a minor version upgrade:

- The Aurora DB cluster maintenance should be performed during a period of low traffic. Use Performance Insights to identify these time periods in order to configure the maintenance windows correctly. For more information on Performance Insights, see Monitoring DB load with Performance Insights on Amazon RDS. For more information on DB cluster maintenance window, Adjusting the preferred DB cluster maintenance window.
- Use Amazon SDKs that support exponential backoff and jitter as a best practice. For more information, see Exponential Backoff And Jitter.

Minor version upgrade prechecks for Aurora MySQL

When you start a minor version upgrade, Amazon Aurora runs prechecks automatically.

These prechecks are mandatory. You can't choose to skip them. The prechecks provide the following benefits:

- They enable you to avoid unplanned downtime during the upgrade.
- If there are incompatibilities, Amazon Aurora prevents the upgrade and provides a log for you to learn about them. You can then use the log to prepare your database for the upgrade by reducing the incompatibilities. For detailed information about removing incompatibilities, see Preparing your installation for upgrade in the MySQL documentation.

The prechecks run before the DB instance is stopped for the upgrade, meaning that they don't cause any downtime when they run. If the prechecks find an incompatibility, Aurora automatically

cancels the upgrade before the DB instance is stopped. Aurora also generates an event for the incompatibility. For more information about Amazon Aurora events, see Working with Amazon RDS event notification.

Aurora records detailed information about each incompatibility in the log file `PrePatchCompatibility.log`. In most cases, the log entry includes a link to the MySQL documentation for correcting the incompatibility. For more information about viewing log files, see Viewing and listing database log files.

Due to the nature of the prechecks, they analyze the objects in your database. This analysis results in resource consumption and increases the time for the upgrade to complete.

Upgrading Aurora MySQL by modifying the engine version

Upgrading the minor version of an Aurora MySQL DB cluster applies additional fixes and new features to an existing cluster.

This kind of upgrade applies to Aurora MySQL clusters where the original version and the upgraded version both have the same Aurora MySQL major version, either 2 or 3. The process is fast and straightforward because it doesn't involve any conversion for the Aurora MySQL metadata or reorganization of your table data.

You perform this kind of upgrade by modifying the engine version of the DB cluster using the Amazon Web Services Management Console, Amazon CLI, or the RDS API. For example, if your cluster is running Aurora MySQL 3.x, choose a higher 3.x version.

If you're performing a minor upgrade on an Aurora Global Database, upgrade all of the secondary clusters before you upgrade the primary cluster.

> **Note**
>
> To perform a minor version upgrade to Aurora MySQL version 8.4, version 3.04.* or higher, or version 2.12.*, use the following process:
>
> 1. Remove all secondary Regions from the global cluster. Follow the steps in Removing a cluster from an Amazon Aurora global database.
> 2. Upgrade the engine version of the primary Region to version 8.4, version 3.04.* or higher, or version 2.12.*, as applicable. Follow the steps in To modify the engine version of a DB cluster.

3. Add secondary Regions to the global cluster. Follow the steps in Adding an Amazon Web Services Region to an Amazon Aurora global database.

To modify the engine version of a DB cluster

- **By using the console** – Modify the properties of your cluster. In the **Modify DB cluster** window, change the Aurora MySQL engine version in the **DB engine version** box. If you aren't familiar with the general procedure for modifying a cluster, follow the instructions at Modifying the DB cluster by using the console, CLI, and API.
- **By using the Amazon CLI** – Call the modify-db-cluster Amazon CLI command, and specify the name of your DB cluster for the `--db-cluster-identifier` option and the engine version for the `--engine-version` option.

  For example, to upgrade to Aurora MySQL version 3.04.1, set the `--engine-version` option to `8.0.mysql_aurora.3.04.1`. Specify the `--apply-immediately` option to immediately update the engine version for your DB cluster.
- **By using the RDS API** – Call the ModifyDBCluster API operation, and specify the name of your DB cluster for the `DBClusterIdentifier` parameter and the engine version for the `EngineVersion` parameter. Set the `ApplyImmediately` parameter to `true` to immediately update the engine version for your DB cluster.

Enabling automatic upgrades between minor Aurora MySQL versions

For an Amazon Aurora MySQL DB cluster, you can specify that Aurora upgrades the DB cluster automatically to new minor versions. You do so by setting the `AutoMinorVersionUpgrade` property (**Auto minor version upgrade** in the Amazon Web Services Management Console) of the DB cluster.

Automatic upgrades occur during the maintenance window. If the individual DB instances in the DB cluster have different maintenance windows from the cluster maintenance window, then the cluster maintenance window takes precedence.

Automatic minor version upgrade doesn't apply to the following kinds of Aurora MySQL clusters:

- Clusters that are part of an Aurora global database
- Clusters that have cross-Region replicas

The outage duration varies depending on workload, cluster size, the amount of binary log data, and if Aurora can use the zero-downtime patching (ZDP) feature. Aurora restarts the database cluster, so you might experience a short period of unavailability before resuming use of your cluster. In particular, the amount of binary log data affects recovery time. The DB instance processes the binary log data during recovery. Thus, a high volume of binary log data increases recovery time.

> **Note**
>
> Aurora only performs automatic upgrades if all DB instances in your DB cluster have the `AutoMinorVersionUpgrade` setting enabled. For information on how to set it, and how it works when applied at the cluster and instance levels, see Automatic minor version upgrades for Aurora DB clusters.
>
> Then if an upgrade path exists for the DB cluster's instances to a minor DB engine version that has `AutoUpgrade` set to true, the upgrade will take place. The `AutoUpgrade` setting is dynamic, and is set by RDS.
>
> Auto minor version upgrades are performed to the default minor version.

You can use a CLI command such as the following to check the status of the `AutoMinorVersionUpgrade` setting for all of the DB instances in your Aurora MySQL clusters.

```
aws rds describe-db-instances \
  --query '*[].
{DBClusterIdentifier:DBClusterIdentifier,DBInstanceIdentifier:DBInstanceIdentifier,AutoMinorVer
```

That command produces output similar to the following:

```
[
  {
      "DBInstanceIdentifier": "db-t2-medium-instance",
      "DBClusterIdentifier": "cluster-57-2020-06-03-6411",
      "AutoMinorVersionUpgrade": true
  },
  {
      "DBInstanceIdentifier": "db-t2-small-original-size",
      "DBClusterIdentifier": "cluster-57-2020-06-03-6411",
      "AutoMinorVersionUpgrade": false
  },
  {
```

```
      "DBInstanceIdentifier": "instance-2020-05-01-2332",
      "DBClusterIdentifier": "cluster-57-2020-05-01-4615",
      "AutoMinorVersionUpgrade": true
  },
... output omitted ...
```

In this example, **Enable auto minor version upgrade** is turned off for the DB cluster `cluster-57-2020-06-03-6411`, because it's turned off for one of the DB instances in the cluster.

Using zero-downtime patching

Performing upgrades for Aurora MySQL DB clusters involves the possibility of an outage when the database is shut down and while it's being upgraded. By default, if you start the upgrade while the database is busy, you lose all the connections and transactions that the DB cluster is processing. If you wait until the database is idle to perform the upgrade, you might have to wait a long time.

The zero-downtime patching (ZDP) feature attempts, on a best-effort basis, to preserve client connections through an Aurora MySQL upgrade. If ZDP completes successfully, application sessions are preserved and the database engine restarts while the upgrade is in progress. The database engine restart can cause a drop in throughput lasting for a few seconds to approximately one minute.

ZDP doesn't apply to the following:

- Operating system (OS) patches and upgrades
- Major version upgrades

ZDP is available for all supported Aurora MySQL versions and DB instance classes.

> **Note**
>
> We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see Using T instance classes for development and testing.

You can see metrics of important attributes during ZDP in the MySQL error log. You can also see information about when Aurora MySQL uses ZDP or chooses not to use ZDP on the **Events** page in the Amazon Web Services Management Console.

In Aurora MySQL, Aurora can perform a zero-downtime patch whether or not binary log replication is enabled. If binary log replication is enabled, Aurora MySQL automatically drops the connection to the binlog target during a ZDP operation. Aurora MySQL automatically reconnects to the binlog target and resumes replication after the restart finishes.

ZDP also works in combination with the reboot enhancements in Aurora MySQL. Patching the writer DB instance automatically patches readers at the same time. After performing the patch, Aurora restores the connections on both the writer and reader DB instances.

ZDP might not complete successfully under the following conditions:

- Long-running queries or transactions are in progress. If Aurora can perform ZDP in this case, any open transactions are canceled but their connections are retained.
- Temporary tables, user locks, or table locks are in use, for example while data definition language (DDL) statements run. Aurora drops these connections.
- Pending parameter changes exist.

If no suitable time window for performing ZDP becomes available because of one or more of these conditions, patching reverts to the standard behavior.

Although connections remain intact following a successful ZDP operation, some variables and features are reinitialized. The following kinds of information aren't preserved through a restart caused by zero-downtime patching:

- Global variables. Aurora restores session variables, but it doesn't restore global variables after the restart.
- Status variables. In particular, the uptime value reported by the engine status is reset after a restart that uses the ZDR or ZDP mechanisms.
- `LAST_INSERT_ID`.
- In-memory `auto_increment` state for tables. The in-memory auto-increment state is reinitialized. For more information about auto-increment values, see MySQL Reference Manual.
- Diagnostic information from `INFORMATION_SCHEMA` and `PERFORMANCE_SCHEMA` tables. This diagnostic information also appears in the output of commands such as `SHOW PROFILE` and `SHOW PROFILES`.

The following activities related to zero-downtime restart are reported on the **Events** page:

- Attempting to upgrade the database with zero downtime.
- Attempting to upgrade the database with zero downtime finished. The event reports how long the process took. The event also reports how many connections were preserved during the restart and how many connections were dropped. You can consult the database error log to see more details about what happened during the restart.

Alternative blue/green upgrade technique

In some situations, your top priority is to perform an immediate switchover from the old cluster to an upgraded one. In such situations, you can use a multistep process that runs the old and new clusters side-by-side. Here, you replicate data from the old cluster to the new one until you are ready for the new cluster to take over. For details, see Using Amazon Aurora Blue/Green Deployments for database updates.

Upgrading the major version of an Amazon Aurora MySQL DB cluster

For Aurora MySQL version 2 and version 3, in a version number such as 3.04.1, the 3 represents the major version. Starting with version 8.4, in a version number such as 8.4.7, the 8.4 represents the major version. Aurora MySQL version 2 is compatible with MySQL 5.7. Aurora MySQL version 3 is compatible with MySQL 8.0. Aurora MySQL version 8.4 is compatible with MySQL 8.4.

Upgrading between major versions requires more extensive planning and testing than for a minor version. The process can take substantial time. After the upgrade is finished, you also might have followup work to do. For example, this might occur because of differences in SQL compatibility or the way certain MySQL-related features work. Or it might occur because of differing parameter settings between the old and new versions.

Contents

- Upgrading from Aurora MySQL version 3 to version 8.4
- Upgrading from Aurora MySQL version 2 to version 3
- Aurora MySQL major version upgrade paths
- How the Aurora MySQL in-place major version upgrade works
- Planning a major version upgrade for an Aurora MySQL cluster
  - Simulating the upgrade by cloning your DB cluster
  - Blue/Green Deployments
- Major version upgrade prechecks for Aurora MySQL

- Precheck process for Aurora MySQL
- Precheck log format for Aurora MySQL
- Precheck log output examples for Aurora MySQL
- Precheck performance for Aurora MySQL
- Summary of Community MySQL upgrade prechecks for Aurora MySQL version 2 to version 3
- Summary of Aurora MySQL upgrade prechecks for Aurora MySQL version 2 to version 3
- Summary of Community MySQL upgrade prechecks for Aurora MySQL version 3 to version 8.4
- Summary of Aurora MySQL upgrade prechecks for Aurora MySQL version 3 to version 8.4
- Precheck descriptions for upgrading Aurora MySQL version 2 to version 3
  - Errors
    - MySQL prechecks that report errors
    - Aurora MySQL prechecks that report errors
  - Warnings
    - MySQL prechecks that report warnings
    - Aurora MySQL prechecks that report warnings
  - Notices
  - Errors, warnings, or notices
- Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4
  - Errors
    - MySQL prechecks that report errors
    - Aurora MySQL prechecks that report errors
  - Warnings
    - MySQL prechecks that report warnings
    - Aurora MySQL prechecks that report warnings
  - Notices
  - Errors, warnings, or notices
- How to perform an in-place upgrade
  - How in-place upgrades affect the parameter groups for a cluster
  - Changes to cluster properties between Aurora MySQL versions
  - In-place major upgrades for global databases

  - In-place upgrades for DB clusters with cross-Region read replicas
- Aurora MySQL in-place upgrade tutorial
- Finding the reasons for Aurora MySQL major version upgrade failures
- Troubleshooting for Aurora MySQL in-place upgrade
- Post-upgrade cleanup for Aurora MySQL version 3
  - Spatial indexes

Upgrading from Aurora MySQL version 3 to version 8.4

For security considerations and new features when upgrading from Aurora MySQL version 3 to Aurora MySQL version 8.4, see Security considerations for upgrading from Aurora MySQL version 3 to version 8.4.

Upgrading from Aurora MySQL version 2 to version 3

If you have a MySQL 5.7–compatible cluster and want to upgrade it to a MySQL–8.0 compatible cluster, you can do so by running an upgrade process on the cluster itself. This kind of upgrade is an *in-place upgrade*, in contrast to upgrades that you do by creating a new cluster. This technique keeps the same endpoint and other characteristics of the cluster. The upgrade is relatively fast because it doesn't require copying all your data to a new cluster volume. This stability helps to minimize any configuration changes in your applications. It also helps to reduce the amount of testing for the upgraded cluster. This is because the number of DB instances and their instance classes all stay the same.

The in-place upgrade mechanism involves shutting down your DB cluster while the operation takes place. Aurora performs a clean shutdown and completes outstanding operations such as transaction rollback and undo purge. For more information, see How the Aurora MySQL in-place major version upgrade works.

The in-place upgrade method is convenient, because it is simple to perform and minimizes configuration changes to associated applications. For example, an in-place upgrade preserves the endpoints and set of DB instances for your cluster. However, the time needed for an in-place upgrade can vary depending on the properties of your schema and how busy the cluster is. Thus, depending on the needs for your cluster, you can choose among the upgrade techniques:

- In-place upgrade
- Blue/Green Deployment

- Snapshot restore

> **Note**
>
> If you use the Amazon CLI or RDS API for the snapshot restore upgrade method, you must run a subsequent operation to create a writer DB instance in the restored DB cluster.

For general information about Aurora MySQL version 3 and its new features, see Aurora MySQL version 3 compatible with MySQL 8.0.

For details about planning an upgrade, see Planning a major version upgrade for an Aurora MySQL cluster and How to perform an in-place upgrade.

Aurora MySQL major version upgrade paths

Not all kinds or versions of Aurora MySQL clusters can use the in-place upgrade mechanism. You can learn the appropriate upgrade path for each Aurora MySQL cluster by consulting the following table.

Type of Aurora MySQL DB cluster	Can it use in-place upgrade?	Action
Aurora MySQL provisioned cluster, version 2	Yes	In-place upgrade is supported for MySQL 5.7–compatible Aurora MySQL clusters. For information about upgrading to Aurora MySQL version 3, see Planning a major version upgrade for an Aurora MySQL cluster and How to perform an in-place upgrade.
Aurora MySQL provisioned cluster, version 3	Yes	In-place upgrade is supported for MySQL 8.0–compatible Aurora MySQL clusters. For information about upgrading to Aurora MySQL version 8.4, see Planning a major version upgrade for

Type of Aurora MySQL DB cluster	Can it use in-place upgrade?	Action
		an Aurora MySQL cluster and How to perform an in-place upgrade.
Aurora MySQL provisioned cluster, version 8.4	Not applicable	Use a minor version upgrade procedure to upgrade between Aurora MySQL version 8.4 minor versions.
Aurora serverless cluster	Yes	Aurora serverless is supported for Aurora MySQL on version 3 and higher.
Cluster in an Aurora global database	Yes	To upgrade Aurora MySQL in an Aurora global database (version 2 to version 3, or version 3 to version 8.4), follow the procedure for doing an in-place upgrade for clusters in an Aurora global database. Perform the upgrade on the global cluster. Aurora upgrades the primary cluster and all the secondary clusters in the global database at the same time. If you use the Amazon CLI or RDS API, call the `modify-global-cluster` command or `ModifyGlobalCluster` operation instead of `modify-db-cluster` or `ModifyDBCluster` . You can perform an in-place major version upgrade only if the `lower_case_table_names` parameter is set to default and you reboot your global database. For more information, see Major version upgrades.
Parallel query cluster	Yes	You can perform an in-place upgrade.

Type of Aurora MySQL DB cluster	Can it use in-place upgrade?	Action
Cluster that is the target of binary log replication	Maybe	If the binary log replication is from an Aurora MySQL cluster, you can perform an in-place upgrade. You can't perform the upgrade if the binary log replication is from an RDS for MySQL or an on-premises MySQL DB instance. In that case, you can upgrade using the snapshot restore mechanism.
Cluster with zero DB instances	No	Using the Amazon CLI or the RDS API, you can create an Aurora MySQL cluster without any attached DB instances. In the same way, you can also remove all DB instances from an Aurora MySQL cluster while leaving the data in the cluster volume intact. While a cluster has zero DB instances, you can't perform an in-place upgrade. The upgrade mechanism requires a writer instance in the cluster to perform conversions on the system tables, data files, and so on. In this case, use the Amazon CLI or the RDS API to create a writer instance for the cluster. Then you can perform an in-place upgrade.
Cluster with backtrack enabled	Yes	You can perform an in-place upgrade for an Aurora MySQL cluster that uses the Backtrack feature. However, after the upgrade, you can't backtrack the cluster to a time before the upgrade.

How the Aurora MySQL in-place major version upgrade works

Aurora MySQL performs a major version upgrade as a multistage process. You can check the current status of an upgrade. Some of the upgrade steps also provide progress information. As each stage begins, Aurora MySQL records an event. You can examine events as they occur on the

Events page in the RDS console. For more information about working with events, see Working with Amazon RDS event notification.

> **Important**
>
> Once the process begins, it runs until the upgrade either succeeds or fails. You can't cancel the upgrade while it's underway. If the upgrade fails, Aurora rolls back all the changes and your cluster has the same engine version, metadata, and so on as before.

The upgrade process consists of these stages:

1. Aurora performs a series of prechecks before beginning the upgrade process. Your cluster keeps running while Aurora does these checks. For example, the cluster can't have any XA transactions in the prepared state or be processing any data definition language (DDL) statements. For example, you might need to shut down applications that are submitting certain kinds of SQL statements. Or you might simply wait until certain long-running statements are finished. Then try the upgrade again. Some checks test for conditions that don't prevent the upgrade but might make the upgrade take a long time.

   If Aurora detects that any required conditions aren't met, modify the conditions identified in the event details. Follow the guidance in Troubleshooting for Aurora MySQL in-place upgrade. If Aurora detects conditions that might cause a slow upgrade, plan to monitor the upgrade over an extended period.
2. Aurora takes your cluster offline. Then Aurora performs a similar set of tests as in the previous stage, to confirm that no new issues arose during the shutdown process. If Aurora detects any conditions at this point that would prevent the upgrade, Aurora cancels the upgrade and brings the cluster back online. In this case, confirm when the conditions no longer apply and start the upgrade again.
3. Aurora creates a snapshot of your cluster volume. Suppose that you discover compatibility or other kinds of issues after the upgrade is finished. Or suppose that you want to perform testing using both the original and upgraded clusters. In such cases, you can restore from this snapshot to create a new cluster with the original engine version and the original data.

   > **Tip**
   >
   > This snapshot is a manual snapshot. However, Aurora can create it and continue with the upgrade process even if you have reached your quota for manual snapshots. This

snapshot remains permanently (if needed) until you delete it. After you finish all post-upgrade testing, you can delete this snapshot to minimize storage charges.

4. Aurora clones your cluster volume. Cloning is a fast operation that doesn't involve copying the actual table data. If Aurora encounters an issue during the upgrade, it reverts to the original data from the cloned cluster volume and brings the cluster back online. The temporary cloned volume during the upgrade isn't subject to the usual limit on the number of clones for a single cluster volume.
5. Aurora performs a clean shutdown for the writer DB instance. During the clean shutdown, progress events are recorded every 15 minutes for the following operations. You can examine events as they occur on the **Events** page in the RDS console.
   - Aurora purges the undo records for old versions of rows.
   - Aurora rolls back any uncommitted transactions.
6. Aurora upgrades the engine version on the writer DB instance:
   - Aurora installs the binary for the new engine version on the writer DB instance.
   - Aurora uses the writer DB instance to upgrade your data to the Aurora MySQL target version compatible format. During this stage, Aurora modifies the system tables and performs other conversions that affect the data in your cluster volume. For version 2 to version 3 upgrades, in particular, Aurora upgrades the partition metadata in the system tables to be compatible with the MySQL 8.0 partition format. This stage can take a long time if the tables in your cluster have a large number of partitions.

     If any errors occur during this stage, you can find the details in the MySQL error logs. After this stage starts, if the upgrade process fails for any reason, Aurora restores the original data from the cloned cluster volume.
7. Aurora upgrades the engine version on the reader DB instances.
8. The upgrade process is completed. Aurora records a final event to indicate that the upgrade process completed successfully. Now your DB cluster is running the new major version.

Planning a major version upgrade for an Aurora MySQL cluster

To help you decide the right time and approach to upgrade, you can learn the differences between the target Aurora MySQL version and your current environment:

Upgrading from Aurora MySQL version 2 to version 3

- If you're converting from RDS for MySQL 8.0 or MySQL 8.0 Community Edition, see Comparing Aurora MySQL version 3 and MySQL 8.0 Community Edition.
- If you're upgrading from Aurora MySQL version 2, RDS for MySQL 5.7, or community MySQL 5.7, see Comparing Aurora MySQL version 2 and Aurora MySQL version 3.
- Create new MySQL 8.0-compatible versions of any custom parameter groups. Apply any necessary custom parameter values to the new parameter groups. Consult Parameter changes for Aurora MySQL version 3 to learn about parameter changes.
- Review your Aurora MySQL version 2 database schema and object definitions for the usage of new reserved keywords introduced in MySQL 8.0 Community Edition. Do so before you upgrade. For more information, see MySQL 8.0 New Keywords and Reserved Words in the MySQL documentation.

Upgrading from Aurora MySQL version 3 to version 8.4

- If you're converting from RDS for MySQL 8.4 or MySQL 8.4 Community Edition, see Comparing Aurora MySQL version 8.4 and MySQL 8.4 Community Edition.
- If you're upgrading from Aurora MySQL version 3, RDS for MySQL 8.0, or community MySQL 8.0, see Comparing Aurora MySQL version 3 and Aurora MySQL version 8.4.
- Create new MySQL 8.4-compatible versions of any custom parameter groups. Apply any necessary custom parameter values to the new parameter groups. Consult Parameter changes for Aurora MySQL version 8.4 to learn about parameter changes.
- Review your Aurora MySQL version 3 database schema and object definitions for the usage of new or changed reserved keywords introduced in MySQL 8.4 Community Edition. Do so before you upgrade. For more information, see MySQL 8.4 New Keywords and Reserved Words in the MySQL documentation.

You can also find more MySQL-specific upgrade considerations and tips in Changes in MySQL 8.0 and Changes in MySQL 8.4 in the *MySQL Reference Manual*. For example, you can use the command `mysqlcheck --check-upgrade` to analyze your existing Aurora MySQL databases and identify potential upgrade issues.

> **Note**
>
> We recommend using larger DB instance classes when upgrading to Aurora MySQL version 3 using the in-place upgrade or snapshot restore technique. Examples are db.r5.24xlarge

and db.r6g.16xlarge. This helps the upgrade process to complete faster by using the majority of available CPU capacity on the DB instance. You can change to the DB instance class that you want after the major version upgrade is complete.

After you finish the upgrade itself, you can follow the post-upgrade procedures in Post-upgrade cleanup for Aurora MySQL version 3. Finally, test your application's functionality and performance.

If you're converting from RDS from MySQL or community MySQL, follow the migration procedure explained in Migrating data to an Amazon Aurora MySQL DB cluster. In some cases, you might use binary log replication to synchronize your data with an Aurora MySQL version 3 cluster as part of the migration. If so, the source system must run a version that's compatible with your target DB cluster.

To make sure that your applications and administration procedures work smoothly after upgrading a cluster between major versions, do some advance planning and preparation. To see what sorts of management code to update for your Amazon CLI scripts or RDS API–based applications, see How in-place upgrades affect the parameter groups for a cluster. Also see Changes to cluster properties between Aurora MySQL versions.

To learn what issues that you might encounter during the upgrade, see Troubleshooting for Aurora MySQL in-place upgrade. For issues that might cause the upgrade to take a long time, you can test those conditions in advance and correct them.

Note

An in-place upgrade involves shutting down your DB cluster while the operation takes place. Aurora MySQL performs a clean shutdown and completes outstanding operations such as undo purge. An upgrade might take a long time if there many undo records to purge. We recommend performing the upgrade only after the history list length (HLL) is low. A generally acceptable value for the HLL is 100,000 or less. For more information, see this blog post.

Simulating the upgrade by cloning your DB cluster

You can check application compatibility, performance, maintenance procedures, and similar considerations for the upgraded cluster. To do so, you can perform a simulation of the upgrade before doing the real upgrade. This technique can be especially useful for production clusters.

Here, it's important to minimize downtime and have the upgraded cluster ready to go as soon as the upgrade has finished.

Use the following steps:

1. Create a clone of the original cluster. Follow the procedure in Cloning a volume for an Amazon Aurora DB cluster.
2. Set up a similar set of writer and reader DB instances as in the original cluster.
3. Perform an in-place upgrade of the cloned cluster. Follow the procedure in How to perform an in-place upgrade.

   Start the upgrade immediately after creating the clone. That way, the cluster volume is still identical to the state of the original cluster. If the clone sits idle before you do the upgrade, Aurora performs database cleanup processes in the background. In that case, the upgrade of the clone isn't an accurate simulation of upgrading the original cluster.
4. Test application compatibility, performance, administration procedures, and so on, using the cloned cluster.
5. If you encounter any issues, adjust your upgrade plans to account for them. For example, adapt any application code to be compatible with the feature set of the higher version. Estimate how long the upgrade is likely to take based on the amount of data in your cluster. You might also choose to schedule the upgrade for a time when the cluster isn't busy.
6. After you're satisfied that your applications and workload work properly with the test cluster, you can perform the in-place upgrade for your production cluster.
7. Work to minimize the total downtime of your cluster during a major version upgrade. To do so, make sure that the workload on the cluster is low or zero at the time of the upgrade. In particular, make sure that there are no long running transactions in progress when you start the upgrade.

Blue/Green Deployments

In some situations, your top priority is to perform an immediate switchover from the old cluster to an upgraded one. In such situations, you can use a multistep process that runs the old and new clusters side-by-side. Here, you replicate data from the old cluster to the new one until you are ready for the new cluster to take over. For details, see Using Amazon Aurora Blue/Green Deployments for database updates.

Major version upgrade prechecks for Aurora MySQL

Upgrading MySQL from one major version to another, such as going from MySQL 5.7 to MySQL 8.0, involves some significant architectural changes that require careful planning and preparation. Unlike minor version upgrades where the focus is mainly on updating the database engine software and in some cases system tables, major MySQL upgrades often introduce fundamental changes to how the database stores and manages its metadata.

To assist you in identifying such incompatibilities, Aurora runs upgrade compatibility checks (prechecks) automatically to examine objects in your database cluster and identify known incompatibilities that can block the upgrade from proceeding. These prechecks run for all major version upgrades, including version 2 to version 3 and version 3 to version 8.4. For details about the Aurora MySQL prechecks, see Precheck descriptions for upgrading Aurora MySQL version 2 to version 3 and Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4. The Aurora prechecks run in addition to those run by the Community MySQL upgrade checker utility.

These prechecks are mandatory. You can't choose to skip them. The prechecks provide the following benefits:

- They can reduce the possibility of running into upgrade failures that can lead to extended downtime.
- If there are incompatibilities, Amazon Aurora prevents the upgrade from proceeding and provides a log for you to learn about them. You can then use the log to prepare your database for the upgrade to version 3 by resolving the incompatibilities. For detailed information about resolving incompatibilities, see Preparing your installation for upgrade in the MySQL documentation and Upgrading to MySQL 8.0? Here is what you need to know... on the MySQL Server Blog.

  For more information about upgrading to MySQL 8.0, see Upgrading MySQL in the MySQL documentation.

The prechecks run before your DB cluster is taken offline for the major version upgrade. If the prechecks find an incompatibility, Aurora automatically cancels the upgrade before the DB instance is stopped. Aurora also generates an event for the incompatibility. For more information about Amazon Aurora events, see Working with Amazon RDS event notification.

After the prechecks are completed, Aurora records detailed information about each incompatibility in the `upgrade-prechecks.log` file. In most cases, the log entry includes a link to the MySQL

documentation for correcting the incompatibility. For more information about viewing log files, see Viewing and listing database log files.

> **Note**
>
> Due to the nature of the prechecks, they analyze the objects in your database. This analysis results in resource consumption and increases the time for the upgrade to complete. For more information on precheck performance considerations, see Precheck process for Aurora MySQL.

Contents

- Precheck process for Aurora MySQL
- Precheck log format for Aurora MySQL
- Precheck log output examples for Aurora MySQL
- Precheck performance for Aurora MySQL
- Summary of Community MySQL upgrade prechecks for Aurora MySQL version 2 to version 3
- Summary of Aurora MySQL upgrade prechecks for Aurora MySQL version 2 to version 3
- Summary of Community MySQL upgrade prechecks for Aurora MySQL version 3 to version 8.4
- Summary of Aurora MySQL upgrade prechecks for Aurora MySQL version 3 to version 8.4
- Precheck descriptions for upgrading Aurora MySQL version 2 to version 3
  - Errors
    - MySQL prechecks that report errors
    - Aurora MySQL prechecks that report errors
  - Warnings
    - MySQL prechecks that report warnings
    - Aurora MySQL prechecks that report warnings
  - Notices
  - Errors, warnings, or notices
- Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4
  - Errors
    - MySQL prechecks that report errors

    - Aurora MySQL prechecks that report errors
- Warnings
    - MySQL prechecks that report warnings
    - Aurora MySQL prechecks that report warnings
- Notices
- Errors, warnings, or notices

Precheck process for Aurora MySQL

As described previously, the Aurora MySQL upgrade process involves running compatibility checks (prechecks) on your database before the major version upgrade can proceed.

For in-place upgrades, the prechecks run on your writer DB instance while it's online. If the precheck succeeds, the upgrade proceeds. If errors are found, they're logged in the `upgrade-prechecks.log` file and the upgrade is canceled. Before attempting the upgrade again, resolve any errors returned in the `upgrade-prechecks.log` file.

For snapshot-restore upgrades, the precheck runs during the restore process. If it succeeds, your database will upgrade to the new Aurora MySQL version. If errors are found, they're logged in the `upgrade-prechecks.log` file and the upgrade is canceled. Before attempting the upgrade again, resolve any errors returned in the `upgrade-prechecks.log` file.

For more information, see Finding the reasons for Aurora MySQL major version upgrade failures and Precheck descriptions for upgrading Aurora MySQL version 2 to version 3.

To monitor precheck status, you can view the following events on your DB cluster.

Precheck status	Event message	Action
Started	Upgrade preparation in progress: Starting online upgrade prechecks.	None
Failed	Database cluster is in a state that cannot be upgraded: Upgrade prechecks failed.	Review `upgrade-prechecks.log` for errors. Remediate errors.

Precheck status	Event message	Action
	For more details, see the upgrade-prechecks.log file. For more information on troubleshooting the cause of the upgrade failure, see AmazonRDS/latest/AuroraUserGuide/AuroraMySQL.Upgrading.Troubleshooting.html	Retry the upgrade.
Succeeded	Upgrade preparation in progress: Completed online upgrade prechecks.	Precheck succeeded with no errors returned. Review `upgrade-prechecks.log` for warnings and notices.

For more information on viewing events, see Viewing Amazon RDS events.

Precheck log format for Aurora MySQL

After the upgrade compatibility checks (prechecks) are complete, you can review the `upgrade-prechecks.log` file. The log file contains the results, affected objects, and remediation information for each precheck.

Errors block the upgrade. You must resolve them before retrying the upgrade.

Warnings and notices are less critical, but we still recommend that you review them carefully to make sure that there are no compatibility issues with the application workload. Address any identified issues soon.

The log file has the following format:

- `targetVersion` – The MySQL-compatible version of the Aurora MySQL upgrade.
- `auroraServerVersion` – The Aurora MySQL version on which the precheck was run.
- `auroraTargetVersion` – The Aurora MySQL version to which you're upgrading.

- `checksPerformed` – Contains the list of prechecks performed.
- `id` – The name of the precheck being run.
- `title` – A description of the precheck being run.
- `status` – This doesn't indicate whether the precheck succeeded or failed, but shows the status of the precheck query:
  - `OK` – The precheck query ran and completed successfully.
  - `ERROR` – The precheck query failed to run. This can occur because of issues such as resource constraints, unexpected instance restarts, or the compatibility precheck query being interrupted.

    For more information, see this example.
- `description` – A general description of the incompatibility, and how to remediate the issue.
- `documentationLink` – Where applicable, a link to relevant Aurora MySQL or MySQL documentation is noted here. For more information, see Precheck descriptions for upgrading Aurora MySQL version 2 to version 3.
- `detectedProblems` – If the precheck returns an error, warning, or notice, this shows details of the incompatibility, and incompatible objects where applicable:
  - `level` – The level of the incompatibility detected by the precheck. Valid levels are the following:
    - `Error` – The upgrade can't proceed until you resolve the incompatibility.
    - `Warning` – The upgrade can proceed, but a deprecated object, syntax, or configuration was detected. Review warnings carefully, and resolve them soon to avoid issues in future releases.
    - `Notice` – The upgrade can proceed, but a deprecated object, syntax, or configuration was detected. Review notices carefully, and resolve them soon to avoid issues in future releases.
  - `dbObject` – The name of the database object in which the incompatibility was detected.
  - `description` – A detailed description of the incompatibility, and how to remediate the issue.
- `errorCount` – The number of incompatibility errors detected. These block the upgrade.
- `warningCount` – The number of incompatibility warnings detected. These don't block the upgrade, but address them soon to avoid problems in future releases.
- `noticeCount` – The number of incompatibility notices detected. These don't block the upgrade, address them soon to avoid problems in future releases.
- `Summary` – A summary of the precheck compatibility error, warning, and notice counts.

Precheck log output examples for Aurora MySQL

The following examples show the precheck log output that you might see. For details of the prechecks that are run, see Precheck descriptions for upgrading Aurora MySQL version 2 to version 3.

Precheck status OK, no incompatibility detected

The precheck query completed successfully. No incompatibilities were detected.

```
{
  "id": "auroraUpgradeCheckIndexLengthLimitOnTinytext",
  "title": "Check for the tables with indexes defined with prefix length greater
 than 255 bytes on tiny text columns",
  "status": "OK",
  "detectedProblems": []
},
```

Precheck status OK, error detected

The precheck query completed successfully. One error was detected.

```
{
  "id": "auroraUpgradeCheckForPrefixIndexOnGeometryColumns",
  "title": "Check for geometry columns on prefix indexes",
  "status": "OK",
  "description": "Consider dropping the prefix indexes of geometry columns and
 restart the upgrade.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test25.sbtest1",
        "description": "Table `test25`.`sbtest1` has an index `idx_t1` on geometry
 column/s. Mysql 8.0 does not support this type of index on a geometry column
 https://dev.mysql.com/worklog/task/?id=11808. To upgrade to MySQL 8.0, Run 'DROP
 INDEX `idx_t1` ON `test25`.`sbtest1`;"
      },
 }
```

Precheck status OK, warning detected

Warnings can be returned when a precheck is successful or unsuccessful.

Here the precheck query completed successfully. Two warnings were detected.


```
{
  "id": "zeroDatesCheck",
  "title": "Zero Date, Datetime, and Timestamp values",
  "status": "OK",
  "description": "Warning: By default zero date/datetime/timestamp values are no
 longer allowed in MySQL, as of 5.7.8 NO_ZERO_IN_DATE and NO_ZERO_DATE are included
 in SQL_MODE by default. These modes should be used with strict mode as they will be
 merged with strict mode in a future release. If you do not include these modes in
 your SQL_MODE setting, you are able to insert date/datetime/timestamp values that
 contain zeros. It is strongly advised to replace zero values with valid ones, as
 they may not work correctly in the future.",
  "documentationLink": "https://lefred.be/content/mysql-8-0-and-wrong-dates/",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "global.sql_mode",
        "description": "does not contain either NO_ZERO_DATE or NO_ZERO_IN_DATE
 which allows insertion of zero dates"
      },
      {
        "level": "Warning",
        "dbObject": "session.sql_mode",
        "description": " of 10 session(s) does not contain either NO_ZERO_DATE or
 NO_ZERO_IN_DATE which allows insertion of zero dates"
      }
    ]
}
```


Precheck status ERROR, no incompatibilities reported

The precheck query failed with an error, so incompatibilities couldn't be verified.


```
{
  "id": "auroraUpgradeCheckForDatafilePathInconsistency",
  "title": "Check for inconsistency related to ibd file path.",
  "status": "ERROR",
  "description": "Can't connect to MySQL server on 'localhost:3306' (111) at
 13/08/2024 12:22:20 UTC. This failure can occur due to low memory available on the
 instance for executing upgrade prechecks. Please check 'FreeableMemory' Cloudwatch
 metric to verify the available memory on the instance while executing prechecks. If
```

```
 instance ran out of memory, we recommend to retry the upgrade on a higher instance
 class."
}
```

This failure can occur because of an unexpected instance restart or a compatibility precheck query being interrupted on the database while running. For example, on smaller DB instance classes, you might experience this when the available memory on the instance runs low.

You can use the `FreeableMemory` Amazon CloudWatch metric to verify the available memory on the instance while running prechecks. If the instance ran out of memory, we recommend retrying the upgrade on a larger DB instance class. In some cases, you can use a Blue/Green deployment This allows prechecks and upgrades to run on the “green” DB cluster independent of the production workload, which also consumes system resources.

For more information, see Troubleshooting memory usage issues for Aurora MySQL databases.

Precheck summary, one error and three warnings detected

The compatibility prechecks also contain information on the source and target Aurora MySQL versions, and a summary of error, warning, and notice counts at the end of the precheck output.

For example, the following output shows that an attempt was made to upgrade from Aurora MySQL 2.11.6 to Aurora MySQL 3.07.1. The upgrade returned one error, three warnings, and no notices. Because upgrades can't proceed when an error is returned, you must resolve the routineSyntaxCheck compatibility issue and retry the upgrade.

```
{
  "serverAddress": "/tmp%2Fmysql.sock",
  "serverVersion": "5.7.12 - MySQL Community Server (GPL)",
  "targetVersion": "8.0.36",
  "auroraServerVersion": "2.11.6",
  "auroraTargetVersion": "3.07.1",
  "outfilePath": "/rdsdbdata/tmp/PreChecker.log",
  "checksPerformed": [{
      ... output for each individual precheck ...
      .
      .
      {
        "id": "oldTemporalCheck",
        "title": "Usage of old temporal type",
        "status": "OK",
          "detectedProblems": []
      },
```

```
      {
        "id": "routinesSyntaxCheck",
        "title": "MySQL 8.0 syntax check for routine-like objects",
        "status": "OK",
        "description": "The following objects did not pass a syntax check with
 the latest MySQL 8.0 grammar. A common reason is that they reference names that
 conflict with new reserved keywords. You must update these routine definitions and
 `quote` any such references before upgrading.",
        "documentationLink": "https://dev.mysql.com/doc/refman/en/keywords.html",
        "detectedProblems": [{
            "level": "Error",
            "dbObject": "test.select_res_word",
            "description": "at line 2,18: unexpected token 'except'"
        }]
      },
      .
      .
      .
      {
        "id": "zeroDatesCheck",
        "title": "Zero Date, Datetime, and Timestamp values",
        "status": "OK",
        "description": "Warning: By default zero date/datetime/timestamp values
 are no longer allowed in MySQL, as of 5.7.8 NO_ZERO_IN_DATE and NO_ZERO_DATE are
 included in SQL_MODE by default. These modes should be used with strict mode as
 they will be merged with strict mode in a future release. If you do not include
 these modes in your SQL_MODE setting, you are able to insert date/datetime/
timestamp values that contain zeros. It is strongly advised to replace zero values
 with valid ones, as they may not work correctly in the future.",
        "documentationLink": "https://lefred.be/content/mysql-8-0-and-wrong-dates/",
        "detectedProblems": [{
            "level": "Warning",
            "dbObject": "global.sql_mode",
            "description": "does not contain either NO_ZERO_DATE or NO_ZERO_IN_DATE
 which allows insertion of zero dates"
            },
            {
            "level": "Warning",
            "dbObject": "session.sql_mode",
            "description": " of 8 session(s) does not contain either NO_ZERO_DATE or
 NO_ZERO_IN_DATE which allows insertion of zero dates"
            }
          ]
       },
```

```
        .
        .
        .
  }],
  "errorCount": 1,
  "warningCount": 3,
  "noticeCount": 0,
  "Summary": "1 errors were found. Please correct these issues before upgrading to
 avoid compatibility issues."
}
```

Precheck performance for Aurora MySQL

The compatibility prechecks run before the DB instance is taken offline for the upgrade, so under regular circumstances they don't cause DB instance downtime while running. However, they can impact application workload running on the writer DB instance. The prechecks access the data dictionary through information_schema tables, which can be slow if there are many database objects. Consider the following factors:

- Precheck duration varies with the number of database objects such as tables, columns, routines, and constraints. DB clusters with a large number of objects can take longer to run.

  For example, the removedFunctionsCheck can take longer and use more resources based on the number of stored objects.
- For in-place upgrades, using a larger DB instance class (for example, db.r5.24xlarge or db.r6g.16xlarge) can help the upgrade complete faster by using more CPU. You can downsize after the upgrade.
- Queries on the `information_schema` across multiple databases can be slow, especially with many objects and on smaller DB instances. In such cases, consider using cloning, snapshot restore, or a Blue/Green deployment for upgrades.
- Precheck resource usage (CPU, memory) can increase with more objects, leading to longer run times on smaller DB instances. In such cases, consider testing using cloning, snapshot restore, or a Blue/Green deployment for upgrades.

  If the prechecks fail due to lack of resources, you can detect this in the precheck log using the status output:

```
"status": "ERROR",
```

For more information, see How the Aurora MySQL in-place major version upgrade works and Planning a major version upgrade for an Aurora MySQL cluster.

Summary of Community MySQL upgrade prechecks for Aurora MySQL version 2 to version 3

The following is a general list of incompatibilities between MySQL 5.7 and 8.0:

- Your MySQL 5.7–compatible DB cluster must not use features that aren't supported in MySQL 8.0.

  For more information, see Features removed in MySQL 8.0 in the MySQL documentation.
- There must be no keyword or reserved word violations. Some keywords might be reserved in MySQL 8.0 that were not reserved previously.

  For more information, see Keywords and reserved words in the MySQL documentation.
- For improved Unicode support, consider converting objects that use the `utf8mb3` charset to use the `utf8mb4` charset. The `utf8mb3` character set is deprecated. Also, consider using `utf8mb4` for character set references instead of `utf8`, because currently `utf8` is an alias for the `utf8mb3` charset.

  For more information, see The utf8mb3 character set (3-byte UTF-8 unicode encoding) in the MySQL documentation.
- There must be no InnoDB tables with a nondefault row format.
- There must be no `ZEROFILL` or `display` length type attributes.
- There must be no partitioned table that uses a storage engine that does not have native partitioning support.
- There must be no tables in the MySQL 5.7 `mysql` system database that have the same name as a table used by the MySQL 8.0 data dictionary.
- There must be no tables that use obsolete data types or functions.
- There must be no foreign key constraint names longer than 64 characters.
- There must be no obsolete SQL modes defined in your `sql_mode` system variable setting.
- There must be no tables or stored procedures with individual `ENUM` or `SET` column elements that exceed 255 characters in length.
- There must be no table partitions that reside in shared InnoDB tablespaces.
- There must be no circular references in tablespace data file paths.

- There must be no queries and stored program definitions that use ASC or DESC qualifiers for GROUP BY clauses.
- There must be no removed system variables, and system variables must use the new default values for MySQL 8.0.
- There must be no zero (0) date, datetime, or timestamp values.
- There must be no schema inconsistencies resulting from file removal or corruption.
- There must be no table names that contain the FTS character string.
- There must be no InnoDB tables that belong to a different engine.
- There must be no table or schema names that are invalid for MySQL 5.7.

For details of the prechecks that are run, see Precheck descriptions for upgrading Aurora MySQL version 2 to version 3.

For more information about upgrading to MySQL 8.0, see Upgrading MySQL in the MySQL documentation. For a general description of changes in MySQL 8.0, see What is new in MySQL 8.0 in the MySQL documentation.

Summary of Aurora MySQL upgrade prechecks for Aurora MySQL version 2 to version 3

Aurora MySQL has its own specific requirements when upgrading from version 2 to version 3, including the following:

- There must be no deprecated SQL syntax, such as SQL_CACHE, SQL_NO_CACHE, and QUERY_CACHE, in views, routines, triggers, and events.
- There must be no FTS_DOC_ID column present on any table without the FTS index.
- There must be no column definition mismatch between the InnoDB data dictionary and the actual table definition.
- All database and table names must be lowercase when the lower_case_table_names parameter is set to 1.
- Events and triggers must not have a missing or empty definer or an invalid creation context.
- All trigger names in a database must be unique.
- DDL recovery and Fast DDL aren't supported in Aurora MySQL version 3. There must be no artifacts in databases related to these features.
- Tables with the REDUNDANT or COMPACT row format can't have indexes larger than 767 bytes.

- The prefix length of indexes defined on `tiny` text columns can't exceed 255 bytes. With the `utf8mb4` character set, this limits the prefix length supported to 63 characters.

  A larger prefix length was allowed in MySQL 5.7 using the `innodb_large_prefix` parameter. This parameter is deprecated in MySQL 8.0.
- There must be no InnoDB metadata inconsistency in the `mysql.host` table.
- There must be no column data type mismatch in system tables.
- There must be no XA transactions in the `prepared` state.
- Column names in views can't be longer than 64 characters.
- Special characters in stored procedures can't be inconsistent.
- Tables can't have data file path inconsistency.

For details of the prechecks that are run, see Precheck descriptions for upgrading Aurora MySQL version 2 to version 3.

Summary of Community MySQL upgrade prechecks for Aurora MySQL version 3 to version 8.4

The following is a general list of incompatibilities between MySQL 8.0 and 8.4:

- There must be no partitioned tables that use KEY partitioning on columns with prefix key indexes. Prefix indexes are ignored by the partition function and are not allowed as of MySQL 8.4.0.
- There must be no columns of type `FLOAT` or `DOUBLE` with the `AUTO_INCREMENT` flag set. This is no longer supported in MySQL 8.4.
- Foreign key constraints should reference a full unique or primary key index on the parent table. Starting with MySQL 8.4.0, creating a foreign key that references a non-unique or partial parent index is forbidden by default.

For details of the prechecks that are run, see Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4.

For more information about upgrading to MySQL 8.4, see Upgrading MySQL in the MySQL 8.4 documentation. For a general description of changes in MySQL 8.4, see What is new in MySQL 8.4 in the MySQL 8.4 documentation.

Summary of Aurora MySQL upgrade prechecks for Aurora MySQL version 3 to version 8.4

Aurora MySQL has its own specific requirements when upgrading from version 3 to version 8.4, including the following:

- There must be no plugins installed that are unsupported in Aurora MySQL version 8.4. Uninstall any unsupported plugins before upgrading.
- There must be no MySQL components installed that are unsupported in Aurora MySQL version 8.4. Uninstall any unsupported components before upgrading.
- Replace the deprecated `validate_password` plugin with the `component_validate_password` component. The `validate_password` plugin is deprecated in Aurora MySQL version 8.4 and will be removed in a future release. For more information, see Using the validate_password component.
- All objects in the `sys` schema must have the correct object types. Mismatches can occur if the schema was manually modified. For more information, see auroraUpgradeCheckForSysSchemaObjectTypeMismatch.

For details of the prechecks that are run, see Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4.

Precheck descriptions for upgrading Aurora MySQL version 2 to version 3

The following prechecks run when you upgrade an Aurora MySQL DB cluster from version 2 (compatible with MySQL 5.7) to version 3 (compatible with MySQL 8.0). For prechecks that run during upgrades from Aurora MySQL version 3 to version 8.4, see Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4.

Contents

- Errors
  - MySQL prechecks that report errors
  - Aurora MySQL prechecks that report errors
- Warnings
  - MySQL prechecks that report warnings
  - Aurora MySQL prechecks that report warnings
- Notices
- Errors, warnings, or notices

Errors

The following prechecks generate errors when the precheck fails, and the upgrade can't proceed.

Topics

- MySQL prechecks that report errors
- Aurora MySQL prechecks that report errors

MySQL prechecks that report errors

The following prechecks are from Community MySQL:

- checkTableMysqlSchema
- circularDirectoryCheck
- columnsWhichCannotHaveDefaultsCheck
- depreciatedSyntaxCheck
- engineMixupCheck
- enumSetElementLengthCheck
- foreignKeyLengthCheck
- getDuplicateTriggers
- getEventsWithNullDefiner
- getMismatchedMetadata
- getTriggersWithNullDefiner
- getValueOfVariablelower_case_table_names
- groupByAscSyntaxCheck
- mysqlEmptyDotTableSyntaxCheck
- mysqlIndexTooLargeCheck
- mysqlInvalid57NamesCheck
- mysqlOrphanedRoutinesCheck
- mysqlSchemaCheck
- nonNativePartitioningCheck
- oldTemporalCheck

- partitionedTablesInSharedTablespaceCheck
- removedFunctionsCheck
- routineSyntaxCheck
- schemaInconsistencyCheck

checkTableMysqlSchema

Precheck level: Error

Issues reported by the `check table x for upgrade` command for the `mysql` schema

Before starting the upgrade to Aurora MySQL version 3, `check table for upgrade` is run on each table in the `mysql` schema on the DB instance. The `check table for upgrade` command examines tables for any potential issues that might arise during an upgrade to a newer version of MySQL. Running this command before attempting an upgrade can help identify and resolve any incompatibilities ahead of time, making the actual upgrade process smoother.

This command performs various checks on each table, such as the following:

- Verifying that the table structure and metadata are compatible with the target MySQL version
- Checking for any deprecated or removed features used by the table
- Ensuring that the table can be properly upgraded without data loss

For more information, see CHECK TABLE statement in the MySQL documentation.

Example output:

```
{
  "id": "checkTableMysqlSchema",
  "title": "Issues reported by 'check table x for upgrade' command for mysql
 schema.",
  "status": "OK",
  "detectedProblems": []
}
```

The output for this precheck depends on the error encountered, and when it's encountered, because `check table for upgrade` performs multiple checks.

If you encounter any errors with this precheck, open a case with Amazon Support to request that the metadata inconsistency be resolved. Alternatively, you can retry the upgrade by performing a logical dump, then restoring to a new Aurora MySQL version 3 DB cluster.

circularDirectoryCheck

Precheck level: Error

Circular directory references in tablespace data file paths

As of MySQL 8.0.17, the `CREATE TABLESPACE ... ADD DATAFILE` clause no longer permits circular directory references. To avoid upgrade issues, remove any circular directory references from tablespace data file paths before upgrading to Aurora MySQL version 3.

Example output:

```
{
  "id": "circularDirectory",
  "title": "Circular directory references in tablespace data file paths",
  "status": "OK",
  "description": "Error: Following tablespaces contain circular directory references
 (e.g. the reference '/../') in data file paths which as of MySQL 8.0.17 are not
 permitted by the CREATE TABLESPACE ... ADD DATAFILE clause. An exception to the
 restriction exists on Linux, where a circular directory reference is permitted if
 the preceding directory is a symbolic link. To avoid upgrade issues, remove any
 circular directory references from tablespace data file paths before upgrading.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/upgrading-from-
previous-series.html#upgrade-innodb-changes",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "ts2",
        "description": "circular reference in datafile path: '/home/ec2-user/dbdata/
mysql_5_7_44/../ts2.ibd'",
        "dbObjectType": "Tablespace"
      }
  ]
}
```

If you receive this error, rebuild your tables using a file-per-table tablespace. Use default file paths for all tablespace and table definitions.

> **Note**
>
> Aurora MySQL doesn't support general tablespaces or `CREATE TABLESPACE` commands.
> Before rebuilding tablespaces, see Online DDL operations in the MySQL documentation to understand the effects of locking and data movement on foreground transactions.

After rebuilding, the precheck passes, allowing the upgrade to proceed.

```
{
  "id": "circularDirectoryCheck",
  "title": "Circular directory references in tablespace data file paths",
  "status": "OK",
  "detectedProblems": []
},
```

columnsWhichCannotHaveDefaultsCheck

Precheck level: Error

Columns that can't have default values

Before MySQL 8.0.13, `BLOB`, `TEXT`, `GEOMETRY`, and `JSON` columns can't have default values. Remove any default clauses on these columns before upgrading to Aurora MySQL version 3. For more information on changes to the default handling for these data types, see the Data type default values in the MySQL documentation.

Example output:

```
{
  "id": "columnsWhichCannotHaveDefaultsCheck",
  "title": "Columns which cannot have default values",
  "status": "OK",
  "description": "Error: The following columns are defined as either BLOB, TEXT,
 GEOMETRY or JSON and have a default value set. These data types cannot have default
 values in MySQL versions prior to 8.0.13, while starting with 8.0.13, the default
 value must be specified as an expression. In order to fix this issue, please use
 the ALTER TABLE ... ALTER COLUMN ... DROP DEFAULT statement.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/data-type-
defaults.html#data-type-defaults-explicit",
  "detectedProblems": [
```

```
      {
        "level": "Error",
        "dbObject": "test.test_blob_default.geo_col",
        "description": "geometry"
      }
  ]
},
```

The precheck returns an error because the `geo_col` column in the `test.test_blob_default` table is using a `BLOB`, `TEXT`, `GEOMETRY`, or `JSON` data type with a default value specified.

Looking at the table definition, we can see that the `geo_col` column is defined as `geo_col geometry NOT NULL default ''`.

```
mysql> show create table test_blob_default\G
*************************** 1. row ***************************
       Table: test_blob_default
Create Table: CREATE TABLE `test_blob_default` (
  `geo_col` geometry NOT NULL DEFAULT ''
) ENGINE=InnoDB DEFAULT CHARSET=latin1
```

Removing this default clause to allow the precheck to pass.

> **Note**
>
> Before running `ALTER TABLE` statements or rebuilding tablespaces, see Online DDL operations in the MySQL documentation to understand the effects of locking and data movement on foreground transactions.

```
mysql> ALTER TABLE test_blob_default modify COLUMN geo_col geometry NOT NULL;
Query OK, 0 rows affected (0.02 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> show create table test_blob_default\G
*************************** 1. row ***************************
       Table: test_blob_default
Create Table: CREATE TABLE `test_blob_default` (
  `geo_col` geometry NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=latin1
1 row in set (0.00 sec)
```

The precheck passes, and you can retry the upgrade.

```
{
  "id": "columnsWhichCannotHaveDefaultsCheck",
  "title": "Columns which cannot have default values",
  "status": "OK",
  "detectedProblems": []
},
```

depreciatedSyntaxCheck

Precheck level: Error

Usage of depreciated keywords in definition

MySQL 8.0 has removed the query cache. As a result, some query cache–specific SQL syntax has been removed. If any of your database objects contain the `QUERY CACHE`, `SQL_CACHE`, or `SQL_NO_CACHE` keywords, a precheck error is returned. To resolve this issue, re-create these objects, removing the mentioned keywords.

Example output:

```
{
  "id": "depreciatedSyntaxCheck",
  "title": "Usage of depreciated keywords in definition",
  "status": "OK",
  "description": "Error: The following DB objects contain keywords like 'QUERY
 CACHE', 'SQL_CACHE', 'SQL_NO_CACHE' which are not supported in major version 8.0.
 It is recommended to drop these DB objects or rebuild without any of the above
 keywords before upgrade.",
  "detectedProblems": [
      {
"level": "Error",
"dbObject": "test.no_query_cache_check",
"description": "PROCEDURE uses depreciated words in definition"
      }
  ]
}
```

The precheck reports that the `test.no_query_cache_check` stored procedure is using one of the removed keywords. Looking at the procedure definition, we can see that it uses `SQL_NO_CACHE`.

```
mysql> show create procedure test.no_query_cache_check\G
*************************** 1. row ***************************
           Procedure: no_query_cache_check
            sql_mode:
    Create Procedure: CREATE DEFINER=`reinvent`@`%` PROCEDURE
 `no_query_cache_check`()
BEGIN
    SELECT SQL_NO_CACHE k from sbtest1 where id > 10 and id < 20 group by k asc;
END
character_set_client: utf8mb4
collation_connection: utf8mb4_0900_ai_ci
  Database Collation: latin1_swedish_ci
1 row in set (0.00 sec)
```

Remove the keyword.

```
mysql> drop procedure test.no_query_cache_check;
Query OK, 0 rows affected (0.01 sec)

mysql> delimiter //

mysql> CREATE DEFINER=`reinvent`@`%` PROCEDURE `no_query_cache_check`() BEGIN
 SELECT k from sbtest1 where id > 10 and id < 20 group by k asc; END//
Query OK, 0 rows affected (0.00 sec)

mysql> delimiter ;
```

After removing the keyword, the precheck completes successfully.

```
{
  "id": "depreciatedSyntaxCheck",
  "title": "Usage of depreciated keywords in definition",
  "status": "OK",
  "detectedProblems": []
}
```

engineMixupCheck

Precheck level: Error

Tables recognized by InnoDB that belong to a different engine

Similar to schemaInconsistencyCheck, this precheck verifies that table metadata in MySQL is consistent before proceeding with the upgrade.

If you encounter any errors with this precheck, open a case with Amazon Support to request that the metadata inconsistency be resolved. Alternatively, you can retry the upgrade by performing a logical dump, then restoring to a new Aurora MySQL version 3 DB cluster.

Example output:

```
{
  "id": "engineMixupCheck",
  "title": "Tables recognized by InnoDB that belong to a different engine",
  "status": "OK",
  "description": "Error: Following tables are recognized by InnoDB engine while the
 SQL layer believes they belong to a different engine. Such situation may happen
 when one removes InnoDB table files manually from the disk and creates e.g. a
 MyISAM table with the same name.\n\nA possible way to solve this situation is to
 e.g. in case of MyISAM table:\n\n1. Rename the MyISAM table to a temporary name
 (RENAME TABLE).\n2. Create some dummy InnoDB table (its definition does not need to
 match), then copy (copy, not move) and rename the dummy .frm and .ibd files to the
 orphan name using OS file commands.\n3. The orphan table can be then dropped (DROP
 TABLE), as well as the dummy table.\n4. Finally the MyISAM table can be renamed
 back to its original name.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "mysql.general_log_backup",
        "description": "recognized by the InnoDB engine but belongs to CSV"
      }
  ]
}
```

enumSetElementLengthCheck

Precheck level: Error

`ENUM` and `SET` column definitions containing elements longer than 255 characters

Tables and stored procedures must not have `ENUM` or `SET` column elements exceeding 255 characters or 1020 bytes. Before MySQL 8.0, the maximum combined length was 64K, but 8.0 limits individual elements to 255 characters or 1020 bytes (supporting multibyte). If you get a precheck failure for `enumSetElementLengthCheck`, modify any elements exceeding these new limits before retrying the upgrade.

Example output:

```
{
  "id": "enumSetElementLengthCheck",
  "title": "ENUM/SET column definitions containing elements longer than 255
 characters",
  "status": "OK",
  "description": "Error: The following columns are defined as either ENUM or SET and
 contain at least one element longer that 255 characters. They need to be altered so
 that all elements fit into the 255 characters limit.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/string-type-
overview.html",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.large_set.s",
        "description": "SET contains element longer than 255 characters"
      }
  ]
},
```

The precheck reports an error because the column `s` in the `test.large_set` table contains a SET element larger than 255 characters.

After reducing the SET size for this column, the precheck passes, allowing the upgrade to proceed.

```
{
  "id": "enumSetElementLenghtCheck",
  "title": "ENUM/SET column definitions containing elements longer than 255
 characters",
  "status": "OK",
  "detectedProblems": []
},
```

foreignKeyLengthCheck

Precheck level: Error

Foreign key constraint names longer than 64 characters

In MySQL, the length of identifiers is limited to 64 characters, as outlined in the MySQL documentation. Due to issues identified where foreign key lengths could equal or exceed this

value, leading to upgrade failures, this precheck was implemented. If you encounter errors with this precheck you should alter or rename your constraint so that it is less than 64 characters before retrying the upgrade.

Example output:

```
{
  "id": "foreignKeyLength",
  "title": "Foreign key constraint names longer than 64 characters",
  "status": "OK",
  "detectedProblems": []
}
```

getDuplicateTriggers

Precheck level: Error

All trigger names in a database must be unique.

Due to changes in the data dictionary implementation, MySQL 8.0 doesn't support case-sensitive triggers within a database. This precheck validates that your DB cluster doesn't have one or more databases containing duplicate triggers. For more information, see Identifier case sensitivity in the MySQL documentation.

Example output:

```
{
  "id": "getDuplicateTriggers",
  "title": "MySQL pre-checks that all trigger names in a database are unique or
 not.",
  "status": "OK",
  "description": "Error: You have one or more database containing duplicate
 triggers. Mysql 8.0 does not support case sensitive triggers within a database
 https://dev.mysql.com/doc/refman/8.0/en/identifier-case-sensitivity.html. To
 upgrade to MySQL 8.0, drop the triggers with case-insensitive duplicate names and
 recreate with distinct names.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test",
        "description": "before_insert_product"
      },
```

```
      {
        "level": "Error",
        "dbObject": "test",
        "description": "before_insert_PRODUCT"
      }
  ]
}
```

The precheck reports an error that the database cluster has two triggers with the same name, but using different cases: `test.before_insert_product` and `test.before_insert_PRODUCT`.

Before upgrading, rename the triggers or drop and re-create them with a new name.

After renaming `test.before_insert_PRODUCT` to `test.before_insert_product_2`, the precheck succeeds.

```
{
  "id": "getDuplicateTriggers",
  "title": "MySQL pre-checks that all trigger names in a database are unique or
 not.",
  "status": "OK",
  "detectedProblems": []
}
```

getEventsWithNullDefiner

Precheck level: Error

The definer column for `mysql.event` can't be null or blank.

The `DEFINER` attribute specifies the MySQL account that owns a stored object definition, such as a trigger, stored procedure, or event. This attribute is particularly useful in situations where you want to control the security context under which the stored object runs. When creating a stored object, if a `DEFINER` isn't specified, the default is the user who created the object.

When upgrading to MySQL 8.0, you can't have any stored objects that have a `null` or blank definer in the MySQL data dictionary. If you have such stored objects, a precheck error is raised. You must fix it before the upgrade can proceed.

Example error:

```
{
  "id": "getEventsWithNullDefiner",
  "title": "The definer column for mysql.event cannot be null or blank.",
  "status": "OK",
  "description": "Error: Set definer column in mysql.event to a valid non-null
 definer.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.get_version",
        "description": "Set definer for event get_version in Schema test"
      }
  ]
}
```

The precheck returns an error for the `test.get_version` event because it has a `null` definer.

To resolve this you can check the event definition. As you can see, the definer is `null` or blank.

```
mysql> select db,name,definer from mysql.event where name='get_version';
+------+-------------+---------+
| db   | name        | definer |
+------+-------------+---------+
| test | get_version |         |
+------+-------------+---------+
1 row in set (0.00 sec)
```

Drop or re-create the event with a valid definer.

> **Note**
>
> Before dropping or redefining a `DEFINER`, carefully review and check your application and privilege requirements. For more information, see Stored object access control in the MySQL documentation.

```
mysql> drop event test.get_version;
Query OK, 0 rows affected (0.00 sec)

mysql> DELIMITER ;
mysql> delimiter $$
```

```
mysql> CREATE EVENT get_version
    ->     ON SCHEDULE
    ->       EVERY 1 DAY
    ->     DO
    ->      ///DO SOMETHING //
    -> $$
Query OK, 0 rows affected (0.01 sec)

mysql> DELIMITER ;

mysql> select db,name,definer from mysql.event where name='get_version';
+------+-------------+------------+
| db   | name        | definer    |
+------+-------------+------------+
| test | get_version | reinvent@% |
+------+-------------+------------+
1 row in set (0.00 sec)
```

Now the precheck passes.

```
{
  "id": "getEventsWithNullDefiner",
  "title": "The definer column for mysql.event cannot be null or blank.",
  "status": "OK",
  "detectedProblems": []},
```

getMismatchedMetadata

Precheck level: Error

Column definition mismatch between InnoDB data dictionary and actual table definition

Similar to schemaInconsistencyCheck, this precheck verifies that table metadata in MySQL is consistent before proceeding with the upgrade. In this case, the precheck verifies that the column definitions match between the InnoDB data dictionary and the MySQL table definition. If a mismatch if detected, the upgrade doesn't proceed.

If you encounter any errors with this precheck, open a case with Amazon Support to request that the metadata inconsistency be resolved. Alternatively, you can retry the upgrade by performing a logical dump, then restoring to a new Aurora MySQL version 3 DB cluster.

Example output:

```
{
  "id": "getMismatchedMetadata",
  "title": "Column definition mismatch between InnoDB Data Dictionary and actual
 table definition.",
  "status": "OK",
  "description": "Error: Your database has mismatched metadata. The upgrade to mysql
 8.0 will not succeed until this is fixed.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.mismatchTable",
        "description": "Table `test/mismatchTable` column names mismatch with InnoDb
 dictionary column names: iD <> id"
      }
  ]
}
```

The precheck reports a mismatch in the metadata for the `id` column in the `test.mismatchTable` table. Specifically, the MySQL metadata has the column name as `iD`, while InnoDB has it as `id`.

getTriggersWithNullDefiner

Precheck level: Error

The definer column for `information_schema.triggers` can't be `null` or blank.

The precheck validates that your database has no triggers defined with `null` or blank definers. For more information on definer requirements for stored objects, see getEventsWithNullDefiner.

Example output:

```
{
  "id": "getTriggersWithNullDefiner",
  "title": "The definer column for information_schema.triggers cannot be null or
 blank.",
  "status": "OK",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.example_trigger",
        "description": "Set definer for trigger example_trigger in Schema test"
```

```
      }
  ]
}
```

The precheck returns an error because the `example_trigger` trigger in the `test` schema has a `null` definer. To correct this issue, fix the definer by re-creating the trigger with a valid user, or drop the trigger. For more information, see the example in getEventsWithNullDefiner.

> **Note**
>
> Before dropping or redefining a `DEFINER`, carefully review and check your application and privilege requirements. For more information, see Stored object access control in the MySQL documentation.

getValueOfVariablelower_case_table_names

Precheck level: Error

All database or table names must be lowercase when the `lower_case_table_names` parameter is set to 1.

Before MySQL 8.0, database names, table names and other objects corresponded to files in the data directory, such as file-based metadata (.frm). The lower_case_table_names system variable allows users to control how the server handles identifier case sensitivity for database objects, and the storage of such metadata objects. This parameter could be changed on an already initialized server following a reboot.

However, in MySQL 8.0, while this parameter still controls how the server handles identifier case sensitivity, it can't be changed after the data dictionary is initialized. When upgrading or creating a MySQL 8.0 database, the value set for `lower_case_table_names` the first time the data dictionary is started on MySQL, is used for the lifetime of that database. This restriction was put in place as part of the implementation of the Atomic Data Dictionary implementation, where database objects are migrated from file-based metadata to internal InnoDB tables in the `mysql` schema.

For more information, see Data dictionary changes in the MySQL documentation.

To avoid issues during upgrade when updating file-based metadata to the new Atomic Data Dictionary, this precheck validates that when `lower_case_table_names = 1`, all tables are

stored on disk in lower case. If they aren't, a precheck error is returned, and you must correct the metadata before proceeding with the upgrade.

Example output:

```
{
  "id": "getValueOfVariablelower_case_table_names",
  "title": "MySQL pre-checks that all database or table names are lowercase when the
 lower_case_table_names parameter is set to 1.",
  "status": "OK",
  "description": "Error: You have one or more databases or tables with uppercase
 letters in the names, but the lower_case_table_names parameter is set to 1. To
 upgrade to MySQL 8.0, either change all database or table names to lowercase, or
 set the parameter to 0.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.TEST",
        "description": "Table test.TEST contains one or more capital letters in name
 while lower_case_table_names = 1"
      }
  ]
}
```

An error is returned because the table `test.TEST` contains uppercase letters, but `lower_case_table_names` is set to 1.

To resolve this issue, you can rename the table to use lowercase, or modify the `lower_case_table_names` parameter on the DB cluster before starting the upgrade.

> **Note**
>
> Carefully test and review the documentation on case sensitivity in MySQL, and how any such changes might affect your application.
> Also review the MySQL 8.0 documentation on how lower_case_table_names are handled differently in MySQL 8.0.

groupByAscSyntaxCheck

Precheck level: Error

Usage of removed GROUP BY ASC/DESC syntax

As of MySQL 8.0.13, the deprecated ASC or DESC syntax for GROUP BY clauses has been removed. Queries relying on GROUP BY sorting might now produce different results. To get a specific sort order, use an ORDER BY clause instead. If any objects exist in your database using this syntax, you must re-create them using an ORDER BY clause before retrying the upgrade. For more information, see SQL changes in the MySQL documentation.

Example output:

```
{
  "id": "groupbyAscSyntaxCheck",
  "title": "Usage of removed GROUP BY ASC/DESC syntax",
  "status": "OK",
  "description": "Error: The following DB objects use removed GROUP BY ASC/DESC
 syntax. They need to be altered so that ASC/DESC keyword is removed from GROUP BY
 clause and placed in appropriate ORDER BY clause.",
  "documentationLink": "https://dev.mysql.com/doc/relnotes/mysql/8.0/en/
news-8-0-13.html#mysqld-8-0-13-sql-syntax",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.groupbyasc",
        "description": "PROCEDURE uses removed GROUP BY ASC syntax",
        "dbObjectType": "Routine"
      }
  ]
}
```

mysqlEmptyDotTableSyntaxCheck

Precheck level: Error

Check for deprecated .<table> syntax used in routines.

In MySQL 8.0, routines can no longer contain the deprecated identifier syntax (\".<table>\"). If any stored routines or triggers contain such identifiers, the upgrade fails. For example, the following .dot_table reference is no longer permitted:

```
mysql> show create procedure incorrect_procedure\G
*************************** 1. row ***************************
           Procedure: incorrect_procedure
            sql_mode:
```

```
    Create Procedure: CREATE DEFINER=`reinvent`@`%` PROCEDURE
 `incorrect_procedure`()
BEGIN delete FROM .dot_table; select * from .dot_table where 1=1; END
character_set_client: utf8mb4
collation_connection: utf8mb4_0900_ai_ci
  Database Collation: latin1_swedish_ci
1 row in set (0.00 sec)
```

After you re-create the routines and triggers to use the correct identifier syntax and escaping, the precheck passes, and the upgrade can proceed. For more information on identifiers, see Schema object names in the MySQL documentation.

Example output:

```
{
  "id": "mysqlEmptyDotTableSyntaxCheck",
  "title": "Check for deprecated '.<table>' syntax used in routines.",
  "status": "OK",
  "description": "Error: The following routines contain identifiers in deprecated
 identifier syntax (\".<table>\"), and should be corrected before upgrade:\n",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.incorrect_procedure",
        "description": " routine body contains deprecated identifiers."
      }
  ]
}
```

The precheck returns an error for the `incorrect_procedure` routine in the `test` database because it contains deprecated syntax.

After you correct the routine, the precheck succeeds, and you can retry the upgrade.

mysqlIndexTooLargeCheck

Precheck level: Error

Check for indexes that are too large to work on MySQL versions higher than 5.7

For compact or redundant row formats, it shouldn't be possible to create an index with a prefix larger than 767 bytes. However, before MySQL version 5.7.35 this was possible. For more information, see the MySQL 5.7.35 release notes.

Any indexes that were affected by this bug will become inaccessible after upgrading to MySQL 8.0. This precheck identifies offending indexes that have to be rebuilt before the upgrade is allowed to proceed.

```
{
 "id": "mysqlIndexTooLargeCheck",
 "title": "Check for indexes that are too large to work on higher versions of MySQL
Server than 5.7",
 "status": "OK",
 "description": "Error: The following indexes ware made too large for their format
in an older version of MySQL (older than 5.7.34). Normally those indexes within
tables with compact or redundant row formats shouldn't be larger than 767 bytes. To
fix this problem those indexes should be dropped before upgrading or those tables
will be inaccessible.",
 "detectedProblems": [
     {
       "level": "Error",
       "dbObject": "test.table_with_large_idx",
       "description": "IDX_2"
     }
 ]
}
```

The precheck returns an error because the `test.table_with_large_idx` table contains an index on a table using a compact or redundant row format that's larger than 767 bytes. These tables would become unaccessible after upgrading to MySQL 8.0. Before proceeding with the upgrade, do one of the following:

- Drop the index mentioned in the precheck.
- Add an index mentioned in the precheck.
- Change the row format used by the table.

Here we rebuild the table to resolve the precheck failure. Before rebuilding the table, make sure that the innodb_file_format is set to `Barracuda`, and the innodb_default_row_format is set to `dynamic`. These are the defaults in MySQL 5.7. For more information, see InnoDB row formats and InnoDB file-format management in the MySQL documentation.

> **Note**
>
> Before rebuilding tablespaces, see Online DDL operations in the MySQL documentation to understand the effects of locking and data movement on foreground transactions.

```
mysql > select @@innodb_file_format,@@innodb_default_row_format;
+----------------------+-----------------------------+
| @@innodb_file_format | @@innodb_default_row_format |
+----------------------+-----------------------------+
| Barracuda            | dynamic                     |
+----------------------+-----------------------------+
1 row in set (0.00 sec)

mysql> optimize table table_with_large_idx;
+---------------------------+----------+----------
+-------------------------------------------------------------------+
| Table                     | Op       | Msg_type | Msg_text
                                |
+---------------------------+----------+----------
+-------------------------------------------------------------------+
| test.table_with_large_idx | optimize | note     | Table does not support optimize,
 doing recreate + analyze instead |
| test.table_with_large_idx | optimize | status   | OK
                                |
+---------------------------+----------+----------
+-------------------------------------------------------------------+
2 rows in set (0.02 sec)

# Verify FILE_FORMAT and ROW_FORMAT
mysql>  select * from information_schema.innodb_sys_tables where name like 'test/
table_with_large_idx';
+----------+---------------------------+------+--------+-------+-------------
+------------+---------------+------------+
| TABLE_ID | NAME                      | FLAG | N_COLS | SPACE | FILE_FORMAT |
 ROW_FORMAT | ZIP_PAGE_SIZE | SPACE_TYPE |
+----------+---------------------------+------+--------+-------+-------------
+------------+---------------+------------+
|       43 | test/table_with_large_idx |   33 |      4 |    26 | Barracuda   |
 Dynamic    |             0 | Single     |
+----------+---------------------------+------+--------+-------+-------------
+------------+---------------+------------+
```

```
1 row in set (0.00 sec)
```

After rebuilding the table, the precheck passes, and the upgrade can proceed.

```
{
  "id": "mysqlIndexTooLargeCheck",
  "title": "Check for indexes that are too large to work on higher versions of MySQL
 Server than 5.7",
  "status": "OK",
  "detectedProblems": []
},
```

mysqlInvalid57NamesCheck

Precheck level: Error

Check for invalid table and schema names used in MySQL 5.7

When migrating to the new data dictionary in MySQL 8.0, your database instance can't contain schemas or tables prefixed with `#mysql50#`. If any such objects exist, the upgrade fails. To resolve this issue, run mysqlcheck against the returned schemas and tables.

> **Note**
>
> Make sure that you use a MySQL 5.7 version of `mysqlcheck` , because --fix-db-names and --fix-table-names have been removed from MySQL 8.0.

Example output:

```
{
  "id": "mysqlInvalid57NamesCheck",
  "title": "Check for invalid table names and schema names used in 5.7",
  "status": "OK",
  "description": "The following tables and/or schemas have invalid names. In order
 to fix them use the mysqlcheck utility as follows:\n\n  $ mysqlcheck --check-
upgrade --all-databases\n  $ mysqlcheck --fix-db-names --fix-table-names --all-
databases\n\nOR via mysql client, for eg:\n\n  ALTER DATABASE `#mysql50#lost+found`
 UPGRADE DATA DIRECTORY NAME;",
  "documentationLink": "https://dev.mysql.com/doc/refman/5.7/en/identifier-
mapping.html https://dev.mysql.com/doc/refman/5.7/en/alter-database.html https://
dev.mysql.com/doc/refman/8.0/en/mysql-nutshell.html#mysql-nutshell-removals",
```

```
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "#mysql50#fix_db_names",
        "description": "Schema name"
      }
  ]
}
```

The precheck reports that the schema `#mysql50#fix_db_names` has an invalid name.

After fixing the schema name, the precheck passes, allowing the upgrade to proceed.

```
{
  "id": "mysqlInvalid57NamesCheck",
  "title": "Check for invalid table names and schema names used in 5.7",
  "status": "OK",
  "detectedProblems": []
},
```

mysqlOrphanedRoutinesCheck

Precheck level: Error

Check for orphaned routines in 5.7

When migrating to the new data dictionary in MySQL 8.0, if there are any stored procedures in the database where the schema no longer exists, the upgrade fails. This precheck verifies that all schemas referenced in stored procedures on your DB instance still exist. To allow the upgrade to proceed, drop these stored procedures.

Example output:

```
{
  "id": "mysqlOrphanedRoutinesCheck",
  "title": "Check for orphaned routines in 5.7",
  "status": "OK",
  "description": "Error: The following routines have been orphaned. Schemas that
 they are referencing no longer exists.\nThey have to be cleaned up or the upgrade
 will fail.",
  "detectedProblems": [
      {
        "level": "Error",
```

```
        "dbObject": "dropped_db.get_version",
        "description": "is orphaned"
      }
  ]
},
```

The precheck reports that the `get_version` stored procedure in the `dropped_db` database is orphaned.

To clean up this procedure, you can re-create the missing schema.

```
mysql> create database dropped_db;
Query OK, 1 row affected (0.01 sec)
```

After the schema is re-created, you can drop the procedure to allow the upgrade to proceed.

```
{
  "id": "mysqlOrphanedRoutinesCheck",
  "title": "Check for orphaned routines in 5.7",
  "status": "OK",
  "detectedProblems": []
},
```

mysqlSchemaCheck

Precheck level: Error

Table names in the `mysql` schema conflicting with new tables in MySQL 8.0

The new Atomic Data Dictionary introduced in MySQL 8.0 stores all metadata in a set of internal InnoDB tables in the `mysql` schema. During the upgrade, the new internal data dictionary tables are created in the `mysql` schema. To avoid naming collisions, which would result in upgrade failures, the precheck examines all table names in the `mysql` schema to ensure that none of the new table names are already in use. If they are, an error is returned, and the upgrade isn't allowed to proceed.

Example output:

```
{
  "id": "mysqlSchema",
  "title": "Table names in the mysql schema conflicting with new tables in the
 latest MySQL.",
```

```
  "status": "OK",
  "description": "Error: The following tables in mysql schema have names that will
 conflict with the ones introduced in the latest version. They must be renamed or
 removed before upgrading (use RENAME TABLE command). This may also entail changes
 to applications that use the affected tables.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/upgrade-before-you-
begin.html",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "mysql.tablespaces",
        "description": "Table name used in mysql schema.",
        "dbObjectType": "Table"
      }
  ]
}
```

An error is returned because there is a table named `tablespaces` in the `mysql` schema. This is one of the new internal data dictionary table names in MySQL 8.0. You must rename or remove any such tables before upgrading, by using the `RENAME TABLE` command.

nonNativePartitioningCheck

Precheck level: Error

Partitioned tables using engines with non-native partitioning

According to the MySQL 8.0 documentation, two storage engines currently provide native partitioning support: InnoDB and NDB. Of these, only InnoDB is supported in Aurora MySQL version 3, compatible with MySQL 8.0. Any attempt to create partitioned tables in MySQL 8.0 using any other storage engine fails. This precheck looks for tables in your DB cluster that are using non-native partitioning. If any are returned, you must remove the partitioning or convert the storage engine to InnoDB.

Example output:

```
{
  "id": "nonNativePartitioning",
  "title": "Partitioned tables using engines with non native partitioning",
  "status": "OK",
  "description": "Error: In the latest MySQL storage engine is responsible for
 providing its own partitioning handler, and the MySQL server no longer provides
 generic partitioning support. InnoDB and NDB are the only storage engines that
```

```
 provide a native partitioning handler that is supported in the latest MySQL. A
 partitioned table using any other storage engine must be altered—either to convert
 it to InnoDB or NDB, or to remove its partitioning—before upgrading the server,
 else it cannot be used afterwards.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/upgrading-from-
previous-series.html#upgrade-configuration-changes",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.partMyisamTable",
         "description": "MyISAM engine does not support native partitioning",
         "dbObjectType": "Table"
      }
  ]
}
```

Here a MyISAM table is using partitioning, which requires action before the upgrade can proceed.

oldTemporalCheck

Precheck level: Error

Usage of old temporal type

"Old temporals" refer to the temporal type columns (such as `TIMESTAMP` and `DATETIME`) created in MySQL versions 5.5 and lower. In MySQL 8.0, support for these old temporal data types is removed, meaning that in-place upgrades from MySQL 5.7 to 8.0 aren't possible if the database contains these old temporal types. To fix this, you must rebuild any tables containing such old temporal date types, before proceeding with the upgrade.

For more information on the deprecation of old temporal data types in MySQL 5.7, see this blog. For more information on the removal of old temporal data types in MySQL 8.0, see this blog.

> **Note**
>
> Before rebuilding tablespaces, see Online DDL operations in the MySQL documentation to understand the effects of locking and data movement on foreground transactions.

Example output:

```
{
  "id": "oldTemporalCheck",
  "title": "Usage of old temporal type",
  "status": "OK",
  "description": "Error: Following table columns use a deprecated and no longer
 supported temporal disk storage format. They must be converted to the new format
 before upgrading. It can by done by rebuilding the table using 'ALTER TABLE
 <table_name> FORCE' command",
  "documentationLink": "https://dev.mysql.com/blog-archive/mysql-8-0-removing-
support-for-old-temporal-datatypes/",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.55_temporal_table.timestamp_column",
        "description": "timestamp /* 5.5 binary format */",
        "dbObjectType": "Column"
      }
  ]
},
```

An error is reported for the column `timestamp_column` in the table `test.55_temporal_table`, because it uses an old temporal disk storage format that's no longer supported.

To resolve this issue and allow the upgrade to proceed, rebuild the table to convert the old temporal disk storage format to the new one introduced in MySQL 5.6. For more information and prerequisites before doing so, see Converting between 3-byte and 4-byte Unicode character sets in the MySQL documentation.

Running the following command to rebuild the tables mentioned in this precheck converts the old temporal types to the newer format with fractional-second precision.

```
ALTER TABLE ... ENGINE=InnoDB;
```

For more information on rebuilding tables, see ALTER TABLE statement in the MySQL documentation.

After rebuilding the table in question and restarting the upgrade, the compatibility check passes, allowing the upgrade to proceed.

```
{
```

```
  "id": "oldTemporalCheck",
  "title": "Usage of old temporal type",
  "status": "OK",
  "detectedProblems": []
}
```

partitionedTablesInSharedTablespaceCheck

Precheck level: Error

Usage of partitioned tables in shared tablespaces

As of MySQL 8.0.13, support for placing table partitions in shared tablespaces is removed. Before upgrading, move any such tables from shared tablespaces to file-per-table tablespaces.

> **Note**
>
> Before rebuilding tablespaces, see Partitioning operations in the MySQL documentation to understand the effects of locking and data movement on foreground transactions.

Example output:

```
{
  "id": "partitionedTablesInSharedTablespaceCheck",
  "title": "Usage of partitioned tables in shared tablespaces",
  "status": "OK",
  "description": "Error: The following tables have partitions in shared tablespaces.
 They need to be moved to file-per-table tablespace before upgrading. You can do
 this by running query like 'ALTER TABLE table_name REORGANIZE PARTITION X INTO
 (PARTITION X VALUES LESS THAN (30) TABLESPACE=innodb_file_per_table);'",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/mysql-
nutshell.html#mysql-nutshell-removals",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.partInnoDBTable",
        "description": "Partition p1 is in shared tablespace innodb",
        "dbObjectType": "Table"
      }
  ]
}
```

The precheck fails because partition p1 from table `test.partInnoDBTable` is in the system tablespace.

To resolve this issue, rebuild the `test.partInnodbTable` table, placing the offending partition p1 in a file-per-table tablespace.

```
mysql > ALTER TABLE partInnodbTable REORGANIZE PARTITION p1
    ->   INTO (PARTITION p1 VALUES LESS THAN ('2014-01-01')
 TABLESPACE=innodb_file_per_table);
Query OK, 0 rows affected, 1 warning (0.02 sec)
Records: 0  Duplicates: 0  Warnings: 0
```

After doing so, the precheck passes.

```
{
  "id": "partitionedTablesInSharedTablespaceCheck",
  "title": "Usage of partitioned tables in shared tablespaces",
  "status": "OK",
  "detectedProblems": []
}
```

removedFunctionsCheck

Precheck level: Error

Usage of functions that were removed from the latest MySQL version

In MySQL 8.0, a number of built-in functions have been removed. This precheck examines your database for objects that might use these functions. If they're found, an error is returned. You must resolve the issues before retrying the upgrade.

The majority of functions removed are spatial functions, which have been replaced with equivalent ST_* functions. In these cases, you modify the database objects to use the new procedure naming. For more information, see Features removed in MySQL 8.0 in the MySQL documentation.

Example output:

```
{
  "id": "removedFunctionsCheck",
  "title": "Usage of removed functions",
```

```
  "status": "OK",
  "description": "Error: The following DB objects use functions that were removed
 in the latest MySQL version. Please make sure to update them to use supported
 alternatives before upgrade.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/mysql-
nutshell.html#mysql-nutshell-removals",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.GetLocationsInPolygon",
        "description": "PROCEDURE uses removed function POLYGONFROMTEXT (consider
 using ST_POLYGONFROMTEXT instead)",
        "dbObjectType": "Routine"
      },
      {
        "level": "Error",
        "dbObject": "test.InsertLocation",
        "description": "PROCEDURE uses removed function POINTFROMTEXT (consider
 using ST_POINTFROMTEXT instead)",
        "dbObjectType": "Routine"
      }
  ]
},
```

The precheck reports that the `test.GetLocationsInPolygon` stored procedure is using two removed functions: POLYGONFROMTEXT and POINTFROMTEXT. It also suggests that you use the new ST_POLYGONFROMTEXT and ST_POINTFROMTEXT as replacements. After re-creating the procedure using the suggestions, the precheck completes successfully.

```
{
  "id": "removedFunctionsCheck",
  "title": "Usage of removed functions",
  "status": "OK",
  "detectedProblems": []
},
```

> **Note**
>
> While in most cases the deprecated functions have direct replacements, make sure that you test your application and review the documentation for any changes in behavior as a result of the change.

routineSyntaxCheck

Precheck level: Error

MySQL syntax check for routine-like objects

MySQL 8.0 introduced reserved keywords that were not reserved previously. The upgrade prechecker evaluates the usage of reserved keywords in the names of database objects and in their definitions and body. If it detects reserved keywords being used in database objects, such as stored procedures, functions, events, and triggers, the upgrade fails and an error is published to the `upgrade-prechecks.log` file. To resolve the issue, you must update these object definitions and enclose any such references in single quotes (') before upgrading. For more information on escaping reserved words in MySQL, see String literals in the MySQL documentation.

Alternatively, you can change the name to a different name, which may require application changes.

Example output:

```
{
  "id": "routineSyntaxCheck",
  "title": "MySQL syntax check for routine-like objects",
  "status": "OK",
  "description": "The following objects did not pass a syntax check with the latest
 MySQL grammar. A common reason is that they reference names that conflict with new
 reserved keywords. You must update these routine definitions and `quote` any such
 references before upgrading.",
  "documentationLink": "https://dev.mysql.com/doc/refman/en/keywords.html",
  "detectedProblems": [
      {
         "level": "Error",
         "dbObject": "test.select_res_word",
         "description": "at line 2,18: unexpected token 'except'",
         "dbObjectType": "Routine"
      }
  ]
}
```

To fix this issue, check the routine definition.

```
SHOW CREATE PROCEDURE test.select_res_word\G
```

```
*************************** 1. row ***************************
           Procedure: select_res_word
            sql_mode:
 ONLY_FULL_GROUP_BY,STRICT_TRANS_TABLES,NO_ZERO_IN_DATE,NO_ZERO_DATE,ERROR_FOR_DIVISION_BY_Z
    Create Procedure: CREATE PROCEDURE 'select_res_word'()
BEGIN
    SELECT * FROM except;
END
character_set_client: utf8
collation_connection: utf8_general_ci
  Database Collation: latin1_swedish_ci
1 row in set (0.00 sec)
```

The procedure uses a table named `except`, which is a new keyword in MySQL 8.0. Re-create the procedure by escaping the string literal.

```
> drop procedure if exists select_res_word;
Query OK, 0 rows affected (0.00 sec)

> DELIMITER $$
 > CREATE PROCEDURE select_res_word()
    -> BEGIN
    ->     SELECT * FROM 'except';
    -> END$$
Query OK, 0 rows affected (0.00 sec)

 > DELIMITER ;
```

The precheck now passes.

```
{
  "id": "routineSyntaxCheck",
  "title": "MySQL syntax check for routine-like objects",
  "status": "OK",
  "detectedProblems": []
}
```

schemaInconsistencyCheck

Precheck level: Error

Schema inconsistencies resulting from file removal or corruption

As described previously, MySQL 8.0 introduced the Atomic Data Dictionary, which stores all metadata in a set of internal InnoDB tables in the `mysql` schema. This new architecture provides a transactional, ACID-compliant way to manage database metadata, solving the "atomic DDL" problem from the old file-based approach. Before MySQL 8.0, it was possible for schema objects to become orphaned if a DDL operation was unexpectedly interrupted. The migration of file-based metadata to the new Atomic Data Dictionary tables during upgrade ensures that there are no such orphaned schema objects in the DB instance. If any orphaned objects are encountered, the upgrade fails.

To help detect these orphaned objects before initiating the upgrade, the `schemaInconsistencyCheck` precheck is run to ensure that all data dictionary metadata objects are in sync. If any orphaned metadata objects are detected, the upgrade doesn't proceed. To proceed with the upgrade, clean up these orphaned metadata objects.

If you encounter any errors with this precheck, open a case with Amazon Support to request that the metadata inconsistency be resolved. Alternatively, you can retry the upgrade by performing a logical dump, then restoring to a new Aurora MySQL version 3 DB cluster.

Example output:

```
{
  "id": "schemaInconsistencyCheck",
  "title": "Schema inconsistencies resulting from file removal or corruption",
  "status": "OK",
  "description": "Error: Following tables show signs that either table datadir
 directory or frm file was removed/corrupted. Please check server logs, examine
 datadir to detect the issue and fix it before upgrade",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.schemaInconsistencyCheck_failure",
        "description": "present in INFORMATION_SCHEMA's INNODB_SYS_TABLES table but
 missing from TABLES table"
      }
  ]
}
```

The precheck reports that the `test.schemaInconsistencyCheck_failure` table has inconsistent metadata. In this case, the table exists in the InnoDB storage engine metadata (`information_schema.INNODB_SYS_TABLES`), but not in the MySQL metadata (`information_schema.TABLES`).

Aurora MySQL prechecks that report errors

The following prechecks are specific to Aurora MySQL:

- auroraCheckDDLRecovery
- auroraCheckRdsUpgradePrechecksTable
- auroraFODUpgradeCheck
- auroraGetDanglingFulltextIndex
- auroraUpgradeCheckForDatafilePathInconsistency
- auroraUpgradeCheckForFtsSpaceIdZero
- auroraUpgradeCheckForFtsSyncInconsistency
- auroraUpgradeCheckForIncompleteXATransactions
- auroraUpgradeCheckForInstanceLimit
- auroraUpgradeCheckForInternalUsers
- auroraUpgradeCheckForInvalidUtf8mb3CharacterStringInViews
- auroraUnsupportedComponentsCheck
- auroraUnsupportedPluginsCheck
- auroraUpgradeCheckForInvalidUtf8mb3ColumnComments
- auroraUpgradeCheckForInvalidUtf8mb3IndexComments
- auroraUpgradeCheckForInvalidUtf8mb3TableComments
- auroraUpgradeCheckForMasterUser
- auroraUpgradeCheckForPrefixIndexOnGeometryColumns
- auroraUpgradeCheckForSpecialCharactersInProcedures
- auroraUpgradeCheckForSysSchemaObjectTypeMismatch
- auroraUpgradeCheckForViewColumnNameLength
- auroraUpgradeCheckIndexLengthLimitOnTinyColumns
- auroraUpgradeCheckMissingInnodbMetadataForMysqlHostTable

auroraCheckDDLRecovery

Precheck level: Error

Check for artifacts related to Aurora DDL recovery feature

As part of the Data Definition Language (DDL) recovery implementation in Aurora MySQL, metadata on inflight DDL statements is maintained in the `ddl_log_md_table` and `ddl_log_table` tables in the `mysql` schema. Aurora's implementation of DDL recovery isn't supported for version 3 onward, because the functionality is part of the new Atomic Data Dictionary implementation in MySQL 8.0. If you have any DDL statements running during the compatibility checks, this precheck might fail. We recommend that you try the upgrade while no DDL statements are running.

If this precheck fails without any running DDL statements, open a case with Amazon Support to request that the metadata inconsistency be resolved. Alternatively, you can retry the upgrade by performing a logical dump, then restoring to a new Aurora MySQL version 3 DB cluster.

If any DDL statements are running, the precheck output prints the following message:

```
“There are DDL statements in process. Please allow DDL statements to finish before
 upgrading.”
```

Example output:

```
{
  "id": "auroraCheckDDLRecovery",
  "title": "Check for artifacts related to Aurora DDL recovery feature",
  "status": "OK",
  "description": "Aurora implementation of DDL recovery is not supported from 3.x
 onwards. This check verifies that the database do not have artifacts realted to the
 feature",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "mysql.ddl_log_md_table",
        "description": "Table mysql.ddl_log_md_table is not empty. Your database has
 pending DDL recovery operations. Reachout to AWS support for assistance."
      },
      {
        "level": "Error",
        "dbObject": "mysql.ddl_log_table",
        "description": "Table mysql.ddl_log_table is not empty. Your database has
 pending DDL recovery operations. Reachout to AWS support for assistance."
      },
```

```
      {
        "level": "Error",
        "dbObject": "information_schema.processlist",
        "description": "There are DDL statements in process. Please allow DDL
 statements to finish before upgrading."
      }
  ]
}
```

The precheck returned an error due to an inflight DDL running concurrently with the compatibility checks. We recommend that you retry the upgrade without any DDLs running.

auroraCheckRdsUpgradePrechecksTable

Precheck level: Error

Check existence of `mysql.rds_upgrade_prechecks` table

This is an internal-only precheck carried out by the RDS service. Any errors will be automatically handled on upgrade and can be safely ignored.

If you encounter any errors with this precheck, open a case with Amazon Support to request that the metadata inconsistency be resolved. Alternatively, you can retry the upgrade by performing a logical dump, then restoring to a new Aurora MySQL version 3 DB cluster.

```
{
  "id": "auroraCheckRdsUpgradePrechecksTable",
  "title": "Check existence of mysql.rds_upgrade_prechecks table",
  "status": "OK",
  "detectedProblems": []
}
```

auroraFODUpgradeCheck

Precheck level: Error

Check for artifacts related to Aurora fast DDL feature

The Fast DDL optimization was introduced in lab mode on Aurora MySQL version 2 to improve the efficiency of some DDL operations. In Aurora MySQL version 3, lab mode has been removed, and the Fast DDL implementation has been superseded by the MySQL 8.0 feature called Instant DDL.

Before upgrading to Aurora MySQL version 3, any tables that use Fast DDL in lab mode will have to be rebuilt by running the `OPTIMIZE TABLE` or `ALTER TABLE ... ENGINE=InnoDB` command to ensure compatibility with Aurora MySQL version 3.

This precheck returns a list of any such tables. After the returned tables have been rebuilt, you can retry the upgrade.

Example output:

```
{
  "id": "auroraFODUpgradeCheck",
  "title": "Check for artifacts related to Aurora fast DDL feature",
  "status": "OK",
  "description": "Aurora fast DDL is not supported from 3.x onwards. This check
 verifies that the database does not have artifacts related to the feature",
  "documentationLink": "https://docs.aws.amazon.com/AmazonRDS/latest/
AuroraUserGuide/AuroraMySQL.Managing.FastDDL.html#AuroraMySQL.Managing.FastDDL-v2",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.test",
        "description": "Your table has pending Aurora fast DDL operations. Run
 'OPTIMIZE TABLE <table name>' for the table to apply all the pending DDL updates.
 Then try the upgrade again."
      }
  ]
}
```

The precheck reports that the table `test.test` has pending Fast DDL operations.

To allow the upgrade to proceed, you can rebuild the table, then retry the upgrade.

> **Note**
>
> Before rebuilding tablespaces, see Online DDL operations in the MySQL documentation to understand the effects of locking and data movement on foreground transactions.

```
mysql> optimize table test.test;
+-----------+----------+----------
+-------------------------------------------------------------------+
```

```
| Table     | Op       | Msg_type | Msg_text
                  |
+-----------+----------+----------
+-------------------------------------------------------------------+
| test.test | optimize | note     | Table does not support optimize, doing recreate
 + analyze instead |
| test.test | optimize | status   | OK
                  |
+-----------+----------+----------
+-------------------------------------------------------------------+
2 rows in set (0.04 sec)
```

After rebuilding the table, the precheck succeeds.

```
{
  "id": "auroraFODUpgradeCheck",
  "title": "Check for artifacts related to Aurora fast DDL feature",
  "status": "OK",
  "detectedProblems": []
}
```

auroraGetDanglingFulltextIndex

Precheck level: Error

Tables with dangling FULLTEXT index reference

Before MySQL 5.6.26, it was possible that after dropping a full-text search index, the hidden `FTS_DOC_ID` and `FTS_DOC_ID_INDEX` columns would become orphaned. For more information, see Bug #76012.

If you have any tables created on earlier versions of MySQL where this has occurred, it can cause upgrades to Aurora MySQL version 3 to fail. This precheck verifies that no such orphaned, or “dangling” full-text indexes exist on your DB cluster before upgrading to MySQL 8.0. If this precheck fails, rebuild any tables that contain such dangling full-text indexes.

Example output:

```
{
  "id": "auroraGetDanglingFulltextIndex",
  "title": "Tables with dangling FULLTEXT index reference",
  "status": "OK",
```

```
  "description": "Error: The following tables contain dangling FULLTEXT index which
 is not supported. It is recommended to rebuild the table before upgrade.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.table_with_fts_index",
        "description": "Table `test.table_with_fts_index` contains dangling FULLTEXT
 index. Kindly recreate the table before upgrade."
      }
  ]
},
```

The precheck reports an error for the `test.table_with_fts_index` table because it contains a dangling full-text index. To allow the upgrade to proceed, rebuild the table to clean up the full-text index auxiliary tables. Use `OPTIMIZE TABLE test.table_with_fts_index` or `ALTER TABLE test.table_with_fts_index, ENGINE=INNODB`.

After rebuilding the table, the precheck passes.

```
{
  "id": "auroraGetDanglingFulltextIndex",
  "title": "Tables with dangling FULLTEXT index reference",
  "status": "OK",
  "detectedProblems": []
},
```

auroraUpgradeCheckForDatafilePathInconsistency

Precheck level: Error

Check for inconsistency related to `ibd` file path

This precheck applies only to Aurora MySQL version 3.03.0 and lower. If you encounter an error with this precheck, upgrade to Aurora MySQL version 3.04 or higher.

Example output:

```
{
  "id": "auroraUpgradeCheckForDatafilePathInconsistency",
  "title": "Check for inconsistency related to ibd file path.",
  "status": "OK",
  "detectedProblems": []
```

```
}
```

auroraUpgradeCheckForFtsSpaceIdZero

Precheck level: Error

Check for full-text index with space ID as zero

In MySQL, when you add a full-text index to an InnoDB table, a number of auxiliary index tablespaces are created. Due to a bug in earlier versions of MySQL, which was fixed in version 5.6.20, it was possible that these auxiliary index tables were created in the system tablespace, rather than their own InnoDB tablespace.

If any such auxiliary tablespaces exist, the upgrade will fail. Re-create the full-text indexes mentioned in the precheck error, then retry the upgrade.

Example output:

```
{
  "id": "auroraUpgradeCheckForFtsSpaceIdZero",
  "title": "Check for fulltext index with space id as zero",
  "status": "OK",
  "description": "The auxiliary tables of FTS indexes on the table are created
 in system table-space. Due to this DDL queries executed on MySQL8.0 shall cause
 database unavailability. To avoid that, drop and recreate all the FTS indexes on
 the table or rebuild the table using ALTER TABLE query before the upgrade.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.fts_space_zero_check",
        "description": " The auxiliary tables of FTS indexes on the table
 'test.fts_space_zero_check' are created in system table-space due to https://
bugs.mysql.com/bug.php?id=72132. In MySQL8.0, DDL queries executed on this table
 shall cause database unavailability. To avoid that, drop and recreate all the
 FTS indexes on the table or rebuild the table using ALTER TABLE query before the
 upgrade."
      }
  ]
},
```

The precheck reports an error for the `test.fts_space_zero_check` table, because it has auxiliary full-text search (FTS) tables in the system tablespace.

After you drop and re-create the FTS indexes associated with this table, the precheck succeeds.

> **Note**
>
> Before rebuilding tablespaces, see Partitioning operations in the MySQL documentation to understand the effects of locking and data movement on foreground transactions.

```
{
 "id": "auroraUpgradeCheckForFtsSpaceIdZero",
 "title": "Check for fulltext index with space id as zero",
 "status": "OK",
 "detectedProblems": []
}
```

auroraUpgradeCheckForFtsSyncInconsistency

Precheck level: Error

Check for FTS auxiliary table sync inconsistency

This precheck detects tables with InnoDB Full-Text Search (FTS) indexes where the internal sync mechanism failed. Specifically, it identifies cases where the `synced_doc_id` in the FTS configuration is less than the maximum document ID in the on-disk auxiliary index tables.

This condition indicates that FTS sync operations failed silently, for example because of duplicate key errors, so the in-memory FTS cache keeps growing instead of flushing to disk.

If left unresolved, this inconsistency can lead to data loss in Full-Text Search indexes during any restart or upgrade.

Example output:

```
{
  "id": "auroraUpgradeCheckForFtsSyncInconsistency",
  "title": "Check for FTS auxiliary table sync inconsistency",
  "status": "OK",
  "description": "Following table(s) has/have a potential duplicate key issue in the
 FTS auxiliary tables causing sync failures.",
  "detectedProblems": [
```

```
      {
        "level": "Error",
        "dbObject": "mydb.my_fts_table",
        "description": "FTS sync is failing. Run 'ALTER TABLE
 `mydb`.`my_fts_table` FORCE' or 'OPTIMIZE TABLE `mydb`.`my_fts_table`' (with
 innodb_optimize_fulltext_only=OFF) or drop and recreate the FTS index (in separate
 statements) to rebuild the table before upgrade."
      }
  ]
}
```

How to identify affected tables:

To manually verify which tables have FTS sync inconsistencies, follow these steps:

1. List all tables with FULLTEXT indexes:

   ```
   SELECT DISTINCT t.NAME
   FROM information_schema.innodb_sys_tables t
   INNER JOIN information_schema.innodb_sys_indexes i
     ON t.TABLE_ID = i.TABLE_ID
   WHERE i.TYPE = 32
     AND t.NAME NOT LIKE 'mysql/%'
     AND t.NAME NOT LIKE 'sys/%';
   ```

2. For each table returned by the preceding query, set the `innodb_ft_aux_table` parameter to point to that table. Because this is a global variable, you must update it through your DB cluster parameter group:

   a. In the Amazon RDS console, choose **Parameter groups**.

   b. Edit your DB cluster parameter group and set `innodb_ft_aux_table` to the table name in `schema/table` format (for example, `mydb/my_fts_table`).

   c. Apply the parameter change. This takes effect immediately because it is a dynamic parameter.

3. After setting the parameter, connect to the database and run the following queries to check for inconsistency:

   ```
   -- Verify the parameter is set correctly
   SELECT @@GLOBAL.innodb_ft_aux_table;
   -- Should return 'schema/table' (e.g., 'mydb/my_fts_table')

   -- Check synced_doc_id
   ```

```
SELECT CAST(VALUE AS UNSIGNED) AS synced_doc_id
FROM INFORMATION_SCHEMA.INNODB_FT_CONFIG
WHERE `KEY` = 'synced_doc_id';

-- Check MAX(FIRST_DOC_ID) in the on-disk auxiliary index
SELECT MAX(FIRST_DOC_ID) AS max_first_doc_id
FROM INFORMATION_SCHEMA.INNODB_FT_INDEX_TABLE;

-- If synced_doc_id < max_first_doc_id, this table has an FTS sync inconsistency.
```

Repeat steps 2 and 3 for each table identified in step 1.

Resolution:

Use one of the following methods to rebuild the FTS index on each affected table:

```
-- Option 1: Drop and recreate the FULLTEXT index
ALTER TABLE `schema`.`table` DROP INDEX ft_index_name;
ALTER TABLE `schema`.`table` ADD FULLTEXT INDEX ft_index_name (column_name);

-- Option 2: Rebuild the table (rebuilds all indexes including FTS)
ALTER TABLE `schema`.`table` FORCE;

-- Option 3: Optimize the table with full rebuild
SET GLOBAL innodb_optimize_fulltext_only = OFF;
OPTIMIZE TABLE `schema`.`table`;
```

After applying the fix, retry the upgrade. The precheck passes after all affected tables have consistent FTS auxiliary data.

auroraUpgradeCheckForIncompleteXATransactions

Precheck level: Error

Check for XA transactions in prepared state

While running the major version upgrade process, it is essential that the Aurora MySQL version 2 DB instance undergo a clean shutdown. This ensures that all transactions are committed or rolled back, and that InnoDB has purged all undo log records. Because transaction rollback is necessary, if your database has any XA transactions in a prepared state, it can block the clean shutdown from proceeding. For this reason, if any prepared XA transactions are detected, the upgrade will be unable to proceed until you take action to commit or roll them back.

For more information on finding XA transactions in a prepared state using `XA RECOVER`, see XA transaction SQL statements in the MySQL documentation. For more information on XA transaction states, see XA transaction states in the MySQL documentation.

Example output:

```
{
  "id": "auroraUpgradeCheckForIncompleteXATransactions",
  "title": "Pre-checks for XA Transactions in prepared state.",
  "status": "OK",
  "description": "Your cluster currently has XA transactions in the prepared state.
 To proceed with the upgrade, commit or rollback these transactions.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "all",
        "description": "Your cluster currently has XA transactions in the prepared
 state. To proceed with the upgrade, commit or rollback these transactions."
      }
  ]
}
```

This precheck reports an error because there are transactions in a prepared state that should be committed or rolled back.

After logging into the database, you can check the information_schema.innodb_trx table and the `XA RECOVER` output for more information.

> **Important**
>
> Before committing or rolling back a transaction, we recommend that you review the MySQL documentation and your application requirements.

```
mysql> select trx_started,
    trx_mysql_thread_id,
    trx_id,trx_state,
    trx_operation_state,
    trx_rows_modified,
    trx_rows_locked
from
```

```
    information_schema.innodb_trx;
+---------------------+--------------------+---------+-----------
+---------------------+-------------------+-----------------+
| trx_started         | trx_mysql_thread_id | trx_id  | trx_state |
 trx_operation_state | trx_rows_modified | trx_rows_locked |
+---------------------+--------------------+---------+-----------
+---------------------+-------------------+-----------------+
| 2024-08-12 01:09:39 |                   0 | 2849470 | RUNNING   | NULL
    |                 1 |               0 |
+---------------------+--------------------+---------+-----------
+---------------------+-------------------+-----------------+
1 row in set (0.00 sec)

mysql> xa recover;
+----------+--------------+--------------+--------+
| formatID | gtrid_length | bqual_length | data   |
+----------+--------------+--------------+--------+
|        1 |            6 |            0 | xatest |
+----------+--------------+--------------+--------+
1 row in set (0.00 sec)
```

In this case, we roll back the prepared transaction.

```
mysql> XA ROLLBACK 'xatest';
Query OK, 0 rows affected (0.00 sec)
v
mysql> xa recover;
Empty set (0.00 sec)
```

After the XA transaction is rolled back, the precheck succeeds.

```
{
  "id": "auroraUpgradeCheckForIncompleteXATransactions",
  "title": "Pre-checks for XA Transactions in prepared state.",
  "status": "OK",
  "detectedProblems": []
}
```

auroraUpgradeCheckForInstanceLimit

Precheck level: Error

Check whether upgrade is supported on the current instance class

Running an in-place upgrade from Aurora MySQL version 2.12.0 or 2.12.1, where the writer DB instance class is db.r6i.32xlarge, is currently not supported. In this case, the precheck returns an error. To allow the upgrade to proceed, you can either change your DB instance class to db.r6i.24xlarge or smaller. Or you can upgrade to Aurora MySQL version 2.12.2 or higher, where in-place upgrade to Aurora MySQL version 3 is supported on db.r6i.32xlarge.

Example output:

```
{
  "id": "auroraUpgradeCheckForInstanceLimit",
  "title": "Checks if upgrade is supported on the current instance class",
  "status": "OK",
  "description": "Upgrade from Aurora Version 2.12.0 and 2.12.1 may fail for 32.xl
 and above instance class.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "all",
        "description": "Upgrade is not supported on this instance size for Aurora
 MySql Version 2.12.1. Before upgrading to Aurora MySql 3, please consider either:
 1. Changing the instance class to 24.xl or lower. -or- 2. Upgrading to patch
 version 2.12.2 or higher."
      }
  ]
},
```

The precheck returns an error because the writer DB instance is using the db.r6i.32xlarge instance class, and is running on Aurora MySQL version 2.12.1.

auroraUpgradeCheckForInternalUsers

Precheck level: Error

Check for 8.0 internal users

This precheck applies only to Aurora MySQL version 3.03.0 and lower. If you encounter an error with this precheck, upgrade to Aurora MySQL version 3.04 or higher.

Example output:

```
{
  "id": "auroraUpgradeCheckForInternalUsers",
```

```
  "title": "Check for 8.0 internal users.",
  "status": "OK",
  "detectedProblems": []
}
```

auroraUpgradeCheckForInvalidUtf8mb3CharacterStringInViews

Precheck level: Error

Check for invalid utf8mb3 characters in view definition

This precheck identifies views that contain comments with invalid `utf8mb3` character encoding. In MySQL 8.0, stricter validation is applied to character encoding in metadata, including view comments. If any view definition contains characters that are not valid in the `utf8mb3` character set, the upgrade fails.

To resolve this issue, modify the view definition to remove or replace any non-BMP characters before you attempt the upgrade.

Example output:

```
{
"id": "auroraUpgradeCheckForInvalidUtf8mb3CharacterStringInViews",
"title": "Check for invalid utf8mb3 character string.",
"status": "OK",
"description": "Definition of following view(s) has/have invalid utf8mb3 character
 string.",
"detectedProblems": [
        {
            "level": "Error",
            "dbObject": "precheck.utf8mb3_invalid_char_view",
            "description": "Definition of view precheck.utf8mb3_invalid_char_view
 contains an invalid utf8mb3 character string. This is due to https://
bugs.mysql.com/bug.php?id=110177. To fix the inconsistency, we recommend you to
 modify the view definition to not use non-BMP characters and try the upgrade
 again."
        }
    ]
},
```

The precheck reports that the `utf8mb3_invalid_char_view` view definition contains invalid `utf8mb3` characters in its definition.

To resolve this issue, identify the view that contains the unsupported characters and update the comments. First, examine the view structure and identify comments.

```
MySQL> SHOW CREATE VIEW precheck.utf8mb3_invalid_char_view\G
*************************** 1. row ***************************
                View: utf8mb3_invalid_char_view
         Create View: CREATE ALGORITHM=UNDEFINED DEFINER=`admin`@`%` SQL SECURITY
 DEFINER VIEW `utf8mb3_invalid_char_view` AS select 'This row contains a dolphin #'
 AS `message`
character_set_client: utf8
collation_connection: utf8_general_ci
1 row in set, 1 warning (0.00 sec)
```

Once you've identified the view that contains the error, replace the view with the `CREATE OR REPLACE VIEW` statement.

```
MySQL> CREATE OR REPLACE VIEW precheck.utf8mb3_invalid_char_view AS select 'This
 view definition to not use non-BMP characters' AS message;
```

After updating all view definitions that contain unsupported characters, the precheck passes and the upgrade can proceed.

```
{
"id": "auroraUpgradeCheckForInvalidUtf8mb3ColumnComments",
"title": "Check for invalid utf8mb3 column comments.",
"status": "OK",
"detectedProblems": []
}
```

auroraUpgradeCheckForInvalidUtf8mb3ColumnComments

Precheck level: Error

Check for invalid utf8mb3 column comments

This precheck identifies tables that contain column comments with invalid `utf8mb3` character encoding. In MySQL 8.0, stricter validation is applied to character encoding in metadata, including column comments. If any column comments contain characters that are not valid in the utf8mb3 character set, the upgrade will fail.

To resolve this issue, you must modify the column comments to remove or replace any non-BMP characters before attempting the upgrade. You can use the `ALTER TABLE` statement to update the column comments.

Example output:

```
{
  "id": "auroraUpgradeCheckForInvalidUtf8mb3ColumnComments",
  "title": "Check for invalid utf8mb3 column comments.",
  "status": "OK",
  "description": "Following table(s) has/have invalid utf8mb3 comments on the
 column/columns.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.t2",
        "description": "Table test.t2 has invalid utf8mb3 comments in it's column/
columns. This is due to non-BMP characters in the comment field. To fix the
 inconsistency, we recommend you to modify comment fields to not use non-BMP
 characters and try the upgrade again."
      }
  ]
}
```

The precheck reports that the `test.t2` table contains invalid `utf8mb3` characters in one or more column comments, specifically due to the presence of non-BMP characters.

To resolve this issue, you can identify the problematic columns and update their comments. First, examine the table structure to identify columns with comments:

```
mysql> SHOW CREATE TABLE test.t2\G
```

Once you've identified the columns with problematic comments, update them using the `ALTER TABLE` statement. For example:

```
mysql> ALTER TABLE test.t2 MODIFY COLUMN column_name data_type COMMENT 'Updated
 comment without non-BMP characters';
```

Alternatively, you can remove the comment entirely:

```
mysql> ALTER TABLE test.t2 MODIFY COLUMN column_name data_type COMMENT '';
```

After updating all problematic column comments, the precheck will pass and the upgrade can proceed:

```
{
  "id": "auroraUpgradeCheckForInvalidUtf8mb3ColumnComments",
  "title": "Check for invalid utf8mb3 column comments.",
  "status": "OK",
  "detectedProblems": []
}
```

> **Note**
>
> Before modifying column comments, ensure that any application code or documentation that relies on these comments is updated accordingly. Consider migrating to the utf8mb4 character set for better Unicode support if your application requires non-BMP characters.

auroraUpgradeCheckForInvalidUtf8mb3IndexComments

Precheck level: Error

Check for invalid utf8mb3 index comments

This precheck identifies tables that contain index comments with invalid `utf8mb3` character encoding. In MySQL 8.0, stricter validation is applied to character encoding in metadata, including index comments. If any index comments contain characters that are not valid in the `utf8mb3` character set, the upgrade fails.

To resolve this issue, you must modify the index comments to remove or replace any non-BMP characters before attempting the upgrade.

Example output:

```
{
    "id": "auroraUpgradeCheckForInvalidUtf8mb3IndexComments",
    "title": "Check for invalid utf8mb3 index comments.",
    "status": "OK",
    "description": "Following table(s) has/have invalid utf8mb3 comments on the
 index.",
```

```
    "detectedProblems": [
        {
            "level": "Error",
            "dbObject": "precheck.utf8mb3_tab_index_comment",
            "description": "Table precheck.utf8mb3_tab_index_comment has invalid
 utf8mb3 comments in it's index. This is due to https://bugs.mysql.com/bug.php?
id=110177. To fix the inconsistency, we recommend you to modify comment fields to
 not use non-BMP characters and try the upgrade again."
        }
    ]
},
```

The precheck reports that the `utf8mb3_tab_index_comment` table contains invalid `utf8mb3` characters in one or more column comments, specifically due to the presence of non-BMP characters.

To resolve this issue, first, examine the table structure to identify the index with problematic comments.

```
MySQL> SHOW CREATE TABLE precheck.utf8mb3_tab_index_comment\G
*************************** 1. row ***************************
    Table: utf8mb3_tab_index_comment
Create Table: CREATE TABLE `utf8mb3_tab_index_comment` (
`id` int(11) DEFAULT NULL,
`name` varchar(100) DEFAULT NULL,
KEY `idx_name` (`name`) COMMENT 'Name index #'
) ENGINE=InnoDB DEFAULT CHARSET=utf8
1 row in set (0.01 sec)
```

Once you identify the index that contains comments that use unsupported characters, drop and recreate the index.

> **Note**
>
> Dropping and recreating a table index can lead to downtime. We recommend that you plan and schedule this operation during maintenance.

```
MySQL> ALTER TABLE precheck.utf8mb3_tab_index_comment DROP INDEX idx_name;
MySQL> ALTER TABLE precheck.utf8mb3_tab_index_comment ADD INDEX idx_name(name);
```

The following example shows another way to recreate the index.

```
MySQL> ALTER TABLE utf8mb3_tab_index_comment DROP INDEX idx_name, ADD INDEX idx_name
 (name) COMMENT 'Updated comment without non-BMP characters';
```

After you remove or update all unsupported index comments, the precheck passes and the upgrade can proceed.

```
{
"id": "auroraUpgradeCheckForInvalidUtf8mb3IndexComments",
"title": "Check for invalid utf8mb3 index comments.",
"status": "OK",
"detectedProblems": []
},
```

auroraUpgradeCheckForInvalidUtf8mb3TableComments

Precheck level: Error

Check for invalid utf8mb3 characters in table definition

This precheck identifies tables that contain comments with invalid `utf8mb3` character encoding. In MySQL 8.0, stricter validation is applied to character encoding in metadata, including table comments. If any table comments contain characters that are not valid in the `utf8mb3` character set, the upgrade fails.

To resolve this issue, you must modify the table comments to remove or replace any non-BMP characters before attempting the upgrade.

Example output:

```
{
    "id": "auroraUpgradeCheckForInvalidUtf8mb3TableComments",
    "title": "Check for invalid utf8mb3 table comments.",
    "status": "OK",
    "description": "Following table(s) has/have invalid utf8mb3 comments.",
    "detectedProblems": [
        {
            "level": "Error",
            "dbObject": "precheck.utf8mb3_table_with_comment",
            "description": "Table precheck.utf8mb3_table_with_comment has invalid
 utf8mb3 comments. This is due to https://bugs.mysql.com/bug.php?id=110177. To fix
```

```
 the inconsistency, we recommend you to modify comment fields to not use non-BMP
 characters and try the upgrade again."
       }

    ]
},
```

The precheck reports invalid `utf8mb3` comments defined for the `utf8mb3_table_with_comment` tables in the test database.

To resolve this issue, identify the table that contains unsupported characters and update the comments. First, examine the table structure and identify the comments.

```
MySQL> SHOW CREATE TABLE precheck.utf8mb3_table_with_comment\G
*************************** 1. row ***************************
    Table: utf8mb3_table_with_comment
Create Table: CREATE TABLE `utf8mb3_table_with_comment` (
`id` int(11) NOT NULL,
`name` varchar(100) DEFAULT NULL,
PRIMARY KEY (`id`)
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COMMENT='This table comment contains flag ##'
1 row in set (0.00 sec)
```

Once you've identified table comments that contain unsupported chatacters, update the comments with the `ALTER TABLE` statement.

```
MySQL> ALTER TABLE precheck.utf8mb3_table_with_comment COMMENT='Updated comment
 without non-BMP characters';
```

Alternatively, you can remove the comment.

```
MySQL> ALTER TABLE precheck.utf8mb3_table_with_comment COMMENT='';
```

After you remove all unsupported characters from all table comments, the precheck succeeds.

```
{
"id": "auroraUpgradeCheckForInvalidUtf8mb3TableComments",
"title": "Check for invalid utf8mb3 table comments.",
"status": "OK",
"detectedProblems": []
},
```

auroraUpgradeCheckForMasterUser

Precheck level: Error

Check whether RDS master user exists

MySQL 8 has added a new privilege model with support for role and dynamic privileges to make privilege management easier and more fine grained. As part of this change, Aurora MySQL has introduced the new `rds_superuser_role`, which is automatically granted to the database's master user on upgrade from Aurora MySQL version 2 to version 3.

For more information on the roles and privileges assigned to the master user in Aurora MySQL, see Master user account privileges. For more information on the role-based privilege model in Aurora MySQL version 3, see Role-based privilege model.

This precheck verifies that the master user exists in the database. If the master user doesn't exist, the precheck fails. To allow the upgrade to proceed, re-create the master user by resetting the master user password, or by manually creating the user. Then retry the upgrade. For more information on resetting the master user password, see Changing the password for the database master user.

Example output:

```
{
  "id": "auroraUpgradeCheckForMasterUser",
  "title": "Check if master user exists",
  "status": "OK",
  "description": "Throws error if master user has been dropped!",
  "documentationLink": "https://docs.aws.amazon.com/AmazonRDS/latest/
AuroraUserGuide/UsingWithRDS.MasterAccounts.html",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "all",
        "description": "Your Master User on host '%' has been dropped. To proceed
 with the upgrade, recreate the master user `reinvent` on default host '%'"
      }
  ]
}
```

After you reset your master user password, the precheck will pass, and you can retry the upgrade.

The following example uses the Amazon CLI to reset the password. Password changes are applied immediately.

```
aws rds modify-db-cluster \
    --db-cluster-identifier my-db-cluster \
    --master-user-password my-new-password
```

Then the precheck succeeds.

```
{
  "id": "auroraUpgradeCheckForMasterUser",
  title": "Check if master user exists",
  "status": "OK",
  "detectedProblems": []
}
```

auroraUpgradeCheckForPrefixIndexOnGeometryColumns

Precheck level: Error

Check for geometry columns on prefix indexes

As of MySQL 8.0.12 , you can no longer create a prefixed index on a column using the GEOMETRY data type. For more information, see WL#11808.

If any such indexes exist, your upgrade will fail. To resolve the issue, drop the prefixed GEOMETRY indexes on the tables mentioned in the precheck failure.

Example output:

```
{
  "id": "auroraUpgradeCheckForPrefixIndexOnGeometryColumns",
  "title": "Check for geometry columns on prefix indexs",
  "status": "OK",
  "description": "Consider dropping the prefix Indexes of geometry columns and
 restart the upgrade.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.geom_index_prefix",
        "description": "Table `test`.`geom_index_prefix` has an index `LatLon` on
 geometry column/s. Mysql 8.0 does not support this type of index on a geometry
```

```
 column https://dev.mysql.com/worklog/task/?id=11808. To upgrade to MySQL 8.0, Run
 'DROP INDEX `LatLon` ON `test`.`geom_index_prefix`;"
      }
  ]
}
```

The precheck reports an error because the `test.geom_index_prefix` table contains an index with a prefix on a `GEOMETRY` column.

After you drop this index, the precheck succeeds.

```
{
  "id": "auroraUpgradeCheckForPrefixIndexOnGeometryColumns",
  "title": "Check for geometry columns on prefix indexs",
  "status": "OK",
  "detectedProblems": []
}
```

auroraUpgradeCheckForSpecialCharactersInProcedures

Precheck level: Error

Check for inconsistency related to special characters in stored procedures

Before MySQL 8.0, database names, table names, and other objects corresponded to files in the data directory, that is, file-based metadata. As part of the upgrade to MySQL 8.0, all database objects are migrated to the new internal data dictionary tables that are stored in the `mysql` schema to support the newly implemented Atomic Data Dictionary. As part of migrating stored procedures, the procedure definition and body for each procedure is validated as it's ingested into the new data dictionary.

Before MySQL 8, in some cases it was possible to create stored routines, or insert directly into the `mysql.proc` table, procedures that contained special characters. For example, you could create a stored procedure that contained a comment with the noncompliant, non-breaking space character `\xa0`. If any such procedures are encountered, the upgrade fails.

This precheck validates that the bodies and definitions of your stored procedures don't contain any such characters. To allow the upgrade to proceed, re-create these stored procedures without any hidden or special characters.

Example output:

```
{
  "id": "auroraUpgradeCheckForSpecialCharactersInProcedures",
  "title": "Check for inconsistency related to special characters in stored
 procedures.",
  "status": "OK",
  "description": "Following procedure(s) has special characters inconsistency.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "information_schema.routines",
        "description": "Data Dictionary Metadata is inconsistent for the procedure
 `get_version_proc` in the database `test` due to usage of special characters in
 procedure body. To avoid that, drop and recreate the procedure without any special
 characters before proceeding with the Upgrade."
      }
  ]
}
```

The precheck reports that the DB cluster contains a procedure called `get_version_proc` in the `test` database that contains special characters in the procedure body.

After dropping and re-creating the stored procedure, the precheck succeeds, allowing the upgrade to proceed.

```
{
  "id": "auroraUpgradeCheckForSpecialCharactersInProcedures",
  "title": "Check for inconsistency related to special characters in stored
 procedures.",
  "status": "OK",
  "detectedProblems": []
},
```

auroraUpgradeCheckForSysSchemaObjectTypeMismatch

Precheck level: Error

Check object type mismatch for sys schema

The sys schema is a set of objects and views in a MySQL database that helps users troubleshoot, optimize, and monitor their DB instances. When performing a major version upgrade from Aurora MySQL version 2 to version 3, the `sys` schema views are re-created and updated to the new Aurora MySQL version 3 definitions.

As part of the upgrade, if any objects in the `sys` schema are defined using storage engines (`sys_config/BASE TABLE` in INFORMATION_SCHEMA.TABLES), rather than views, the upgrade will fail. Such tables can be found in the `information_schema.tables` table. This is not an expected behavior, but in some cases can occur due to user error.

This precheck validates all `sys` schema objects to ensure that they use the correct table definitions, and that views aren't mistakenly defined as InnoDB or MyISAM tables. To resolve the issue, manually fix any returned objects by renaming or dropping them. Then retry the upgrade.

Example output:

```
{
  "id": "auroraUpgradeCheckForSysSchemaObjectTypeMismatch",
  "title": "Check object type mismatch for sys schema.",
  "status": "OK",
  "description": "Database contains objects with type mismatch for sys schema.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "sys.waits_global_by_latency",
        "description": "Your object sys.waits_global_by_latency has a type mismatch.
 To fix the inconsistency we recommend to rename or remove the object before
 upgrading (use RENAME TABLE command). "
      }
  ]
}
```

The precheck reports that the sys.waits_global_by_latency view in the `sys` schema has a type mismatch that is blocking the upgrade from proceeding.

After logging into the DB instance, you can see that this object is defined as a InnoDB table, when it should be a view.

```
mysql> show create table sys.waits_global_by_latency\G
*************************** 1. row ***************************
       Table: waits_global_by_latency
Create Table: CREATE TABLE `waits_global_by_latency` (
  `events` varchar(128) DEFAULT NULL,
  `total` bigint(20) unsigned DEFAULT NULL,
  `total_latency` text,
  `avg_latency` text,
```

```
  `max_latency` text
) ENGINE=InnoDB DEFAULT CHARSET=utf8
1 row in set (0.00 sec)
```

To resolve this issue we can either drop and re-create the view with the correct definition or rename it. During the upgrade process, it will be automatically created with the correct table definition.

```
mysql> RENAME TABLE sys.waits_global_by_latency to sys.waits_global_by_latency_old;
Query OK, 0 rows affected (0.01 sec)
```

After doing this, the precheck passes.

```
{
  "id": "auroraUpgradeCheckForSysSchemaObjectTypeMismatch",
  "title": "Check object type mismatch for sys schema.",
  "status": "OK",
  "detectedProblems": []
}
```

auroraUpgradeCheckForViewColumnNameLength

Precheck level: Error

Check upper limit for column name in view

The maximum permitted length of a column name in MySQL is 64 characters. Before MySQL 8.0, in some cases it was possible to create a view with a column name larger than 64 characters. If any such views exist on your database instance, a precheck error is returned, and the upgrade will fail. To allow the upgrade to proceed, you must re-create the views in question, making sure that their column lengths are less than 64 characters. Then retry the upgrade.

Example output:

```
{
  "id": "auroraUpgradeCheckForViewColumnNameLength",
  "title": "Check for upperbound limit related to column name in view.",
  "status": "OK",
  "description": "Following view(s) has column(s) with length greater than 64.",
  "detectedProblems": [
      {
```

```
        "level": "Error",
        "dbObject":
 "test.colname_view_test.col2_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pa
        "description": "View `test`.`colname_view_test`has column
 `col2_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad` with
 invalid column name length. To avoid Upgrade errors, view should be altered by
 renaming the column name so that its length is not 0 and doesn't exceed 64."
      }
  ]
}
```

The precheck reports that the `test.colname_view_test` view contains a column `col2_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad` that exceeds the max permitted column length of 64 characters.

Looking at the view definition, we can see the offending column.

```
mysql> desc `test`.`colname_view_test`;
+-------------------------------------------------------------------------+-------------
+------+-----+---------+-------+
| Field                                                                   | Type        |
 Null | Key | Default | Extra |
+-------------------------------------------------------------------------+-------------
+------+-----+---------+-------+
| col1                                                                    | varchar(20) |
 YES  |     | NULL    |       |
| col2_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad_pad | int(11)     |
 YES  |     | NULL    |       |
+-------------------------------------------------------------------------+-------------
+------+-----+---------+-------+
2 rows in set (0.00 sec)
```

To allow the upgrade to proceed, re-create the view, making sure that the column length doesn't exceed 64 characters.

```
mysql> drop view `test`.`colname_view_test`;
Query OK, 0 rows affected (0.01 sec)

mysql> create view `test`.`colname_view_test`(col1, col2_nopad) as select inf,
 fodcol from test;
Query OK, 0 rows affected (0.01 sec)
```

```
mysql> desc `test`.`colname_view_test`;
+------------+-------------+------+-----+---------+-------+
| Field      | Type        | Null | Key | Default | Extra |
+------------+-------------+------+-----+---------+-------+
| col1       | varchar(20) | YES  |     | NULL    |       |
| col2_nopad | int(11)     | YES  |     | NULL    |       |
+------------+-------------+------+-----+---------+-------+
2 rows in set (0.00 sec)
```

After doing this, the precheck succeeds.

```
{
  "id": "auroraUpgradeCheckForViewColumnNameLength",
  "title": "Check for upperbound limit related to column name in view.",
  "status": "OK",
  "detectedProblems": []
}
```

auroraUpgradeCheckIndexLengthLimitOnTinyColumns

Precheck level: Error

Check for tables with indexes defined with a prefix length greater than 255 bytes on tiny columns

When creating an index on a column using a binary data type in MySQL, you must add a prefix length in the index definition. Before MySQL 8.0, in some cases it was possible to specify a prefix length larger than the maximum allowed size of such data types. An example is `TINYTEXT` and `TINYBLOB` columns, where the maximum permitted data size is 255 bytes, but index prefixes larger than this were permitted. For more information, see InnoDB limits in the MySQL documentation.

If this precheck fails, drop the offending index or reduce the prefix length of `TINYTEXT` and `TINYBLOB` columns of the index to less than 255 bytes. Then retry the upgrade.

Example output:

```
{
  "id": "auroraUpgradeCheckIndexLengthLimitOnTinyColumns",
  "title": "Check for the tables with indexes defined with prefix length greater
 than 255 bytes on tiny columns",
  "status": "OK",
```

```
  "description": "Prefix length of the indexes defined on tiny columns cannot
 exceed 255 bytes. With utf8mb4 char set, this limits the prefix length supported
 upto 63 characters only. A larger prefix length was allowed in MySQL5.7 using
 innodb_large_prefix parameter. This parameter is deprecated in MySQL 8.0.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/innodb-limits.html,
 https://dev.mysql.com/doc/refman/8.0/en/storage-requirements.html",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.tintxt_prefixed_index.col1",
        "description": "Index 'PRIMARY' on tinytext/tinyblob column `col1` of table
 `test.tintxt_prefixed_index` is defined with prefix length exceeding 255 bytes.
 Reduce the prefix length to <=255 bytes depending on character set used. For
 utf8mb4, it should be <=63."
      }
  ]
}
```

The precheck reports an error for the `test.tintxt_prefixed_index` table, because it has an Index PRIMARY that has a prefix larger than 255 bytes on a TINYTEXT or TINYBLOB column.

Looking at the definition for this table, we can see that the primary key has a prefix of 65 on the `TINYTEXT` column `col1`. Because the table is defined using the `utf8mb4` character set, which stores 4 bytes per character, the prefix exceeds the 255-byte limit.

```
mysql> show create table `test`.`tintxt_prefixed_index`\G
*************************** 1. row ***************************
       Table: tintxt_prefixed_index
Create Table: CREATE TABLE `tintxt_prefixed_index` (
  `col1` tinytext NOT NULL,
  `col2` tinytext,
  `col_id` tinytext,
  PRIMARY KEY (`col1`(65))
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 ROW_FORMAT=DYNAMIC
1 row in set (0.00 sec)
```

Modifying the index prefix to 63 while using the `utf8mb4` character set will allow the upgrade to proceed.

```
mysql> alter table `test`.`tintxt_prefixed_index` drop PRIMARY KEY, ADD  PRIMARY KEY
 (`col1`(63));
Query OK, 0 rows affected (0.04 sec)
```

```
Records: 0  Duplicates: 0  Warnings: 0
```

After doing this, the precheck succeeds.

```
{
  "id": "auroraUpgradeCheckIndexLengthLimitOnTinyColumns",
  "title": "Check for the tables with indexes defined with prefix length greater
 than 255 bytes on tiny columns",
  "status": "OK",
  "detectedProblems": []
}
```

auroraUpgradeCheckMissingInnodbMetadataForMysqlHostTable

Precheck level: Error

Check missing InnoDB metadata inconsistency for the `mysql.host` table

This is an internal-only precheck carried out by the RDS service. Any errors will be automatically handled on upgrade and can be safely ignored.

If you encounter any errors with this precheck, open a case with Amazon Support to request that the metadata inconsistency be resolved. Alternatively, you can retry the upgrade by performing a logical dump, then restoring to a new Aurora MySQL version 3 DB cluster.

auroraUnsupportedComponentsCheck

Precheck level: Error

Check for unsupported components installed in the database

This precheck identifies components that are installed in the database but are not supported in the target Aurora MySQL version. These components must be uninstalled before the upgrade can proceed.

Example output:

```
{
  "id": "auroraUnsupportedComponentsCheck",
  "title": "Check for unsupported components",
  "status": "OK",
  "description": "Checks for unsupported components installed in the database",
```

```
  "documentationLink": "https://docs.aws.amazon.com/AmazonRDS/latest/
AuroraMySQLReleaseNotes/",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "all",
        "description": "Component file://component_log_sink_json loaded in the
 engine. To proceed with the upgrade, uninstall this component."
      }
  ]
}
```

To resolve this issue:

1. Identify the unsupported components listed in the error message.
2. Uninstall each unsupported component:

```
UNINSTALL COMPONENT 'file://component_name';
```

3. Verify removal by checking the component list:

```
SELECT * FROM mysql.component;
```

4. Re-run the precheck to confirm resolution.

auroraUnsupportedPluginsCheck

Precheck level: Error

Check for unsupported plugin usage

This precheck identifies plugins that are not supported in the target Aurora MySQL version and must be removed before upgrading.

If you encounter errors with this precheck, uninstall the unsupported plugins listed in the error message before proceeding with the upgrade.

Example output:

```
{
    "id": "auroraUnsupportedPluginsCheck",
    "title": "Check for unsupported plugins",
    "status": "OK",
```

```
    "description": "Checks for unsupported plugins installed in the database",
    "documentationLink": "https://docs.aws.amazon.com/AmazonRDS/latest/
AuroraMySQLReleaseNotes/",
    "detectedProblems": [
        {
            "level": "Error",
            "dbObject": "all",
            "description": "Plugin simple_parser loaded in the engine. To proceed
 with the upgrade, remove this plugin."
        }
    ]
}
```

To resolve this issue:

1. Identify the unsupported plugins listed in the error message.
2. Uninstall each unsupported plugin:

   ```
   UNINSTALL PLUGIN plugin_name;
   ```

3. Verify removal by checking the plugin list:

   ```
   SHOW PLUGINS;
   ```

4. Re-run the precheck to confirm resolution.

Warnings

The following prechecks generate warnings when the precheck fails, but the upgrade can proceed.

Topics

- MySQL prechecks that report warnings
- Aurora MySQL prechecks that report warnings

MySQL prechecks that report warnings

The following prechecks are from Community MySQL:

- defaultAuthenticationPlugin
- maxdbFlagCheck

- mysqlDollarSignNameCheck
- reservedKeywordsCheck
- utf8mb3Check
- zeroDatesCheck
- deprecatedDefaultAuth

defaultAuthenticationPlugin

Precheck level: Warning

New default authentication plugin considerations

In MySQL 8.0, the `caching_sha2_password` authentication plugin was introduced, providing more secure password encryption and better performance than the deprecated `mysql_native_password` plugin. For Aurora MySQL version 3, the default authentication plugin used for database users is the `mysql_native_password` plugin.

This precheck warns that this plugin will be removed and the default changed in a future major version release. Consider evaluating the compatibility of your application clients and users ahead of this change.

For more information, see caching_sha2_password compatibility issues and solutions in the MySQL documentation.

Example output:


```
{
  "id": "defaultAuthenticationPlugin",
  "title": "New default authentication plugin considerations",
  "description": "Warning: The new default authentication plugin
 'caching_sha2_password' offers more secure password hashing than previously
 used 'mysql_native_password' (and consequent improved client connection
 authentication). However, it also has compatibility implications that
 may affect existing MySQL installations. If your MySQL installation
 must serve pre-8.0 clients and you encounter compatibility issues after
 upgrading, the simplest way to address those issues is to reconfigure
 the server to revert to the previous default authentication plugin
 (mysql_native_password). For example, use these lines in the server option file:
\n\n[mysqld]\ndefault_authentication_plugin=mysql_native_password\n\nHowever, the
```

```
 setting should be viewed as temporary, not as a long term or permanent solution,
 because it causes new accounts created with the setting in effect to forego the
 improved authentication security.\nIf you are using replication please take time to
 understand how the authentication plugin changes may impact you.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/upgrading-from-
previous-series.html#upgrade-caching-sha2-password-compatibility-issues\nhttps://
dev.mysql.com/doc/refman/8.0/en/upgrading-from-previous-series.html#upgrade-caching-
sha2-password-replication"
},
```

maxdbFlagCheck

Precheck level: Warning

Usage of obsolete `MAXDB` `sql_mode` flag

In MySQL 8.0, a number of deprecated sql_mode system variable options were removed, one of which was MAXDB. This precheck examines all currently connected sessions, along with routines and triggers, to ensure that none have `sql_mode` set to any combination that includes MAXDB.

Example output:

```
{
  "id": "maxdbFlagCheck",
  "title": "Usage of obsolete MAXDB sql_mode flag",
  "status": "OK",
  "description": "Warning: The following DB objects have the obsolete MAXDB
 option persisted for sql_mode, which will be cleared during the upgrade. It can
 potentially change the datatype DATETIME into TIMESTAMP if it is used inside
 object's definition, and this in turn can change the behavior in case of dates
 earlier than 1970 or later than 2037. If this is a concern, please redefine these
 objects so that they do not rely on the MAXDB flag before running the upgrade.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/mysql-
nutshell.html#mysql-nutshell-removals",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "test.maxdb_stored_routine",
        "description": "PROCEDURE uses obsolete MAXDB sql_mode",
        "dbObjectType": "Routine"
      }
  ]
}
```

The precheck reports that the `test.maxdb_stored_routine` routine contains a unsupported `sql_mode` option.

After logging into the database, you can see in the routine definition that `sql_mode` contains `MAXDB`.

```
 > SHOW CREATE PROCEDURE test.maxdb_stored_routine\G

*************************** 1. row ***************************
           Procedure: maxdb_stored_routine
            sql_mode:
 PIPES_AS_CONCAT,ANSI_QUOTES,IGNORE_SPACE,MAXDB,NO_KEY_OPTIONS,NO_TABLE_OPTIONS,NO_FIELD_OPT
    Create Procedure: CREATE DEFINER="msandbox"@"localhost" PROCEDURE
 "maxdb_stored_routine"()
BEGIN
    SELECT * FROM test;
END
character_set_client: utf8
collation_connection: utf8_general_ci
  Database Collation: latin1_swedish_ci
1 row in set (0.00 sec)
```

To resolve the issue, re-create the procedure after setting the correct `sql_mode` on the client.

> **Note**
>
> According to the MySQL documentation, MySQL stores the `sql_mode` setting that's in effect when a routine is created or altered. It always runs the routine with this setting, regardless of the `sql_mode` setting when the routine starts.
> Before changing `sql_mode`, see Server SQL modes in the MySQL documentation. Carefully evaluate any potential impact of doing so on your application.

Re-create the procedure without the unsupported `sql_mode`.

```
mysql > set sql_mode='PIPES_AS_CONCAT,ANSI_QUOTES,IGNORE_SPACE';
Query OK, 0 rows affected, 1 warning (0.00 sec)

mysql > DROP PROCEDURE test.maxdb_stored_routine\G
Query OK, 0 rows affected (0.00 sec)
```

```
mysql >
mysql > DELIMITER $$
mysql >
mysql > CREATE PROCEDURE test.maxdb_stored_routine()
    -> SQL SECURITY DEFINER
    -> BEGIN
    ->     SELECT * FROM test;
    -> END$$
Query OK, 0 rows affected (0.00 sec)

mysql >
mysql > DELIMITER ;
mysql > show create procedure test.maxdb_stored_routine\G
*************************** 1. row ***************************
           Procedure: maxdb_stored_routine
            sql_mode: PIPES_AS_CONCAT,ANSI_QUOTES,IGNORE_SPACE
    Create Procedure: CREATE DEFINER="msandbox"@"localhost" PROCEDURE
 "maxdb_stored_routine"()
BEGIN
    SELECT * FROM test;
END
character_set_client: utf8
collation_connection: utf8_general_ci
  Database Collation: latin1_swedish_ci
1 row in set (0.00 sec)
```

The precheck succeeds.

```
{
  "id": "maxdbFlagCheck",
  "title": "Usage of obsolete MAXDB sql_mode flag",
  "status": "OK",
  "detectedProblems": []
}
```

mysqlDollarSignNameCheck

Precheck level: Warning

Check for deprecated usage of single dollar signs in object names

As of MySQL 8.0.32, use of the dollar sign ($) as the first character of an unquoted identifier is deprecated. If you have any schemas, tables, views, columns, or routines containing a $ as the

first character, this precheck returns a warning. While this warning doesn't block the upgrade from proceeding, we recommend that you take action soon to resolve this. From MySQL 8.4 any such identifiers will return a syntax error rather than a warning.

Example output:

```
{
  "id": "mysqlDollarSignNameCheck",
  "title": "Check for deprecated usage of single dollar signs in object names",
  "status": "OK",
  "description": "Warning: The following objects have names with deprecated usage
 of dollar sign ($) at the begining of the identifier. To correct this warning,
 ensure, that names starting with dollar sign, also end with it, similary to quotes
 ($example$). ",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "test.$deprecated_syntx",
        "description": " name starts with $ sign."
      }
  ]
},
```

The precheck reports a warning because the `$deprecated_syntx` table in the `test` schema contains a $ as the first character.

reservedKeywordsCheck

Precheck level: Warning

Usage of database objects with names conflicting with new reserved keywords

This check is similar to the routineSyntaxCheck, in that it checks for usage of database objects with names conflicting with new reserved keywords. While they don't block upgrades, you need to evaluate warnings carefully.

Example output:

Using the previous example with the table named `except`, the precheck returns a warning:

```
{
  "id": "reservedKeywordsCheck",
```

```
  "title": "Usage of db objects with names conflicting with new reserved keywords",
  "status": "OK",
  "description": "Warning: The following objects have names that conflict with
 new reserved keywords. Ensure queries sent by your applications use `quotes` when
 referring to them or they will result in errors.",
  "documentationLink": "https://dev.mysql.com/doc/refman/en/keywords.html",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "test.except",
        "description": "Table name",
        "dbObjectType": "Table"
      }
  ]
}
```

This warning lets you know that there might be some application queries to review. If your application queries aren't correctly escaping string literals, they might experience errors after upgrading to MySQL 8.0. Review your applications to confirm, testing against a clone or snapshot of your Aurora MySQL DB cluster running on version 3.

Example of a non-escaped application query that will fail after upgrading:

```
SELECT * FROM escape;
```

Example of a correctly escaped application query that will succeed after upgrading:

```
SELECT * FROM 'escape';
```

utf8mb3Check

Precheck level: Warning

Usage of `utf8mb3` character set

In MySQL 8.0 the `utf8mb3` character set is deprecated, and will be removed in a future MySQL major version. This precheck is implemented to raise a warning if any database objects using this character set are detected. While this won't block an upgrade from proceeding, we highly recommend that you think about migrating tables to the `utf8mb4` character set, which is the default as of MySQL 8.0. For more information on utf8mb3 and utf8mb4, see Converting between 3-byte and 4-byte Unicode character sets in the MySQL documentation.

Example output:

```
{
  "id": "utf8mb3",
  "title": "Usage of utf8mb3 charset",
  "status": "OK",
  "description": "Warning: The following objects use the deprecated utf8mb3
 character set. It is recommended to convert them to use utf8mb4 instead, for
 improved Unicode support. The utf8mb3 character is subject to removal in the
 future.",
  "documentationLink": "https://dev.mysql.com/doc/refman/8.0/en/charset-unicode-
utf8mb3.html",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "test.t1.col1",
        "description": "column's default character set: utf8",
        "dbObjectType": "Column"
      },
      {
        "level": "Warning",
        "dbObject": "test.t1.col2",
        "description": "column's default character set: utf8",
        "dbObjectType": "Column"
      }
  ]
}
```

To resolve this issue, you rebuild the objects and tables referenced. For more information and prerequisites before doing so, see Converting between 3-byte and 4-byte Unicode character sets in the MySQL documentation.

zeroDatesCheck

Precheck level: Warning

Zero date, datetime, and timestamp values

MySQL now enforces stricter rules regarding the use of zero values in date, datetime, and timestamp columns. We recommend that you use the `NO_ZERO_IN_DATE` and `NO_ZERO_DATE` SQL modes in conjunction with `strict` mode, as they will be merged with `strict` mode in a future MySQL release.

If the `sql_mode` setting for any of your database connections, at the time of running the precheck, doesn't include these modes, a warning is raised in the precheck. Users might still be able to insert date, datetime, and timestamp values containing zero values. However, we strongly advise replacing any zero values with valid ones, as their behavior might change in the future and they might not function correctly. As this is a warning, it won't block upgrades, but we recommend that you start planning to take action.

Example output:


```
{
  "id": "zeroDatesCheck",
  "title": "Zero Date, Datetime, and Timestamp values",
  "status": "OK",
  "description": "Warning: By default zero date/datetime/timestamp values are no
 longer allowed in MySQL, as of 5.7.8 NO_ZERO_IN_DATE and NO_ZERO_DATE are included
 in SQL_MODE by default. These modes should be used with strict mode as they will be
 merged with strict mode in a future release. If you do not include these modes in
 your SQL_MODE setting, you are able to insert date/datetime/timestamp values that
 contain zeros. It is strongly advised to replace zero values with valid ones, as
 they may not work correctly in the future.",
  "documentationLink": "https://lefred.be/content/mysql-8-0-and-wrong-dates/",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "global.sql_mode",
        "description": "does not contain either NO_ZERO_DATE or NO_ZERO_IN_DATE
 which allows insertion of zero dates"
      },
      {
        "level": "Warning",
        "dbObject": "session.sql_mode",
        "description": " of 10 session(s) does not contain either NO_ZERO_DATE or
 NO_ZERO_IN_DATE which allows insertion of zero dates"
      }
  ]
}
```


deprecatedDefaultAuth

Precheck level: Warning

Check for deprecated default authentication method in system variables

This precheck validates that the default authentication plugin configured in system variables is compatible with the target Aurora MySQL version. For Aurora MySQL, `mysql_native_password` generates a warning rather than an error, as Aurora MySQL continues to support this authentication method.

Example output:

```
{
  "id": "deprecatedDefaultAuth",
  "title": "Check for deprecated or invalid default authentication methods in system
 variables",
  "status": "OK",
  "description": "mysql_native_password authentication method is deprecated and it
 should be considered to correct this before upgrading to 8.4.0 release.",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "default_authentication_plugin",
        "description": "System variable default_authentication_plugin is set to
 mysql_native_password which is deprecated."
      }
  ]
}
```

On your target cluster parameter group, it is recommended to set the `authentication_policy` parameter value to `*:caching_sha2_password` to use `caching_sha2_password` as the default password-based authentication method.

Aurora MySQL prechecks that report warnings

The following prechecks are specific to Aurora MySQL:

- auroraUpgradeCheckForRollbackSegmentHistoryLength
- auroraUpgradeCheckForUncommittedRowModifications
- auroraValidatePasswordPluginCheck

auroraUpgradeCheckForRollbackSegmentHistoryLength

Precheck level: Warning

Checks whether the rollback segment history list length for the cluster is high

As mentioned in auroraUpgradeCheckForIncompleteXATransactions, while running the major version upgrade process, it is essential that the Aurora MySQL version 2 DB instance undergo a clean shutdown. This ensures that all transactions are committed or rolled back, and that InnoDB has purged all undo log records.

If your DB cluster has a high rollback segment history list length (HLL), it can prolong the amount of time that InnoDB takes to complete its purge of undo log records, leading to extended downtime during the major version upgrade process. If the precheck detects that the HLL on your DB cluster is high, it raises a warning. While this doesn't block your upgrade from proceeding, we recommend that you closely monitor the HLL on your DB cluster. Keeping it at low levels reduces the downtime required during a major version upgrade. For more information on monitoring HLL, see The InnoDB history list length increased significantly.

Example output:

```
{
  "id": "auroraUpgradeCheckForRollbackSegmentHistoryLength",
  "title": "Checks if the rollback segment history length for the cluster is high",
  "status": "OK",
  "description": "Rollback Segment History length is greater than 1M. Upgrade may
 take longer time.",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "information_schema.innodb_metrics",
        "description": "The InnoDB undo history list length('trx_rseg_history_len')
 is 82989114. Upgrade may take longer due to purging of undo information for old row
 versions."
      }
  ]
}
```

The precheck returns a warning because it detected the InnoDB undo HLL was high on the database cluster (82989114). Although the upgrade proceeds, depending on the amount of undo to purge, it can extend the downtime required during the upgrade process.

We recommend that you investigate open transactions on your DB cluster before running the upgrade in production, to make sure your HLL is kept at a manageable size.

auroraUpgradeCheckForUncommittedRowModifications

Precheck level: Warning

Checks whether there are many uncommitted row modifications

As mentioned in auroraUpgradeCheckForIncompleteXATransactions, while running the major version upgrade process, it is essential that the Aurora MySQL version 2 DB instance undergo a clean shutdown. This ensures that all transactions are committed or rolled back, and that InnoDB has purged all undo log records.

If your DB cluster has transactions that have modified a large number of rows, it can prolong the amount of time InnoDB takes to complete a rollback of this transaction as part of the clean shutdown process. If the precheck finds long-running transactions, with a large number of modified rows on your DB cluster, it raises a warning. While this doesn't block your upgrade from proceeding, we recommend that you closely monitor the size of active transactions on your DB cluster. Keeping it at low levels reduces the downtime required during a major version upgrade.

Example output:

```
{
  "id": "auroraUpgradeCheckForUncommittedRowModifications",
  "title": "Checks if there are many uncommitted modifications to rows",
  "status": "OK",
  "description": "Database contains uncommitted row changes greater than 10M.
 Upgrade may take longer time.",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "information_schema.innodb_trx",
        "description": "The database contains 11000000 uncommitted row change(s) in
 1 transaction(s). Upgrade may take longer due to transaction rollback."
      }
  ]
},
```

The precheck reports that the DB cluster contains a transaction with 11,000,000 uncommitted row changes that will need to be rolled back during the clean shutdown process. The upgrade will proceed, but to reduce downtime during the upgrade process, we recommend that you monitor and investigate this before running the upgrade on your production clusters.

To view active transactions on your writer DB instance, you can use the information_schema.innodb_trx table. The following query on the writer DB instance shows current transactions, run time, state, and modified rows for the DB cluster.

```
# Example of uncommitted transaction
mysql> SELECT trx_started,
       TIME_TO_SEC(TIMEDIFF(now(), trx_started)) AS seconds_trx_has_been_running,
       trx_mysql_thread_id AS show_processlist_connection_id,
       trx_id,
       trx_state,
       trx_rows_modified AS rows_modified
FROM information_schema.innodb_trx;
+---------------------+-----------------------------
+---------------------------------+----------+-----------+---------------+
| trx_started         | seconds_trx_has_been_running |
 show_processlist_connection_id | trx_id   | trx_state | rows_modified |
+---------------------+-----------------------------
+---------------------------------+----------+-----------+---------------+
| 2024-08-12 18:32:52 |                          1592 |
 20041 | 52866130 | RUNNING   |      11000000 |
+---------------------+-----------------------------
+---------------------------------+----------+-----------+---------------+
1 row in set (0.01 sec)

# Example of transaction rolling back
mysql> SELECT trx_started,
       TIME_TO_SEC(TIMEDIFF(now(), trx_started)) AS seconds_trx_has_been_running,
       trx_mysql_thread_id AS show_processlist_connection_id,
       trx_id,
       trx_state,
       trx_rows_modified AS rows_modified
FROM information_schema.innodb_trx;
+---------------------+-----------------------------
+---------------------------------+----------+-------------+---------------+
| trx_started         | seconds_trx_has_been_running |
 show_processlist_connection_id | trx_id   | trx_state    | rows_modified |
+---------------------+-----------------------------
+---------------------------------+----------+-------------+---------------+
| 2024-08-12 18:32:52 |                          1719 |
 20041 | 52866130 | ROLLING BACK |      10680479 |
+---------------------+-----------------------------
+---------------------------------+----------+-------------+---------------+
1 row in set (0.01 sec)
```

After the transaction is committed or rolled back, the precheck no longer returns a warning. Consult the MySQL documentation and your application team before rolling back any large transactions, as rollback can take some time to complete, depending on transaction size.

```
{
  "id": "auroraUpgradeCheckForUncommittedRowModifications",
  "title": "Checks if there are many uncommitted modifications to rows",
  "status": "OK",
  "detectedProblems": []
},
```

For more information on optimizing InnoDB transaction management, and the potential impact of running and rolling back large transactions on MySQL database instances, see Optimizing InnoDB transaction management in the MySQL documentation.

auroraValidatePasswordPluginCheck

Precheck level: Warning

Check for deprecated validate_password plugin usage

The `validate_password` plugin is deprecated in Aurora MySQL version 8.4 and will be removed in a future release. This warning does not block the upgrade but indicates that you should plan to transition to the `validate_password` component.

Example output:

```
{
  "id": "auroraValidatePasswordPluginCheck",
  "title": "Check for deprecated validate_password plugin",
  "status": "OK",
  "description": "The validate_password plugin is deprecated and will be removed
 in a future release. It is recommended to transition to the validate_password
 component.",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "validate_password",
        "description": "The validate_password plugin is installed. Consider
 transitioning to the validate_password component."
      }
  ]
```

```
}
```

To resolve this warning:

1. Ensure the `aurora_enable_validate_password_component` parameter is enabled in your target cluster parameter group to enable the component in your target cluster. Customize other component parameters as needed.
2. After upgrade, run the following command to remove the `validate_password` plugin:

```
UNINSTALL PLUGIN validate_password;
```

Notices

The following precheck generates a notice when the precheck fails, but the upgrade can proceed.

sqlModeFlagCheck

Precheck level: Notice

Usage of obsolete `sql_mode` flags

In addition to `MAXDB`, a number of other `sql_mode` options have been removed: `DB2`, `MSSQL`, `MYSQL323`, `MYSQL40`, `ORACLE`, `POSTGRESQL`, `NO_FIELD_OPTIONS`, `NO_KEY_OPTIONS`, and `NO_TABLE_OPTIONS`. As of MySQL 8.0, none of these values can be assigned to the `sql_mode` system variable. If this precheck finds any open sessions using these `sql_mode` settings, make sure that your DB instance and DB cluster parameter groups, and client applications and configurations, are updated to disable them.- For more information, see the MySQL documentation.

Example output:

```
{
  "id": "sqlModeFlagCheck",
  "title": "Usage of obsolete sql_mode flags",
  "status": "OK",
  "detectedProblems": []
}
```

To resolve any of these precheck failures, see maxdbFlagCheck.

Errors, warnings, or notices

The following precheck can return an error, warning, or notice depending on the precheck output.

checkTableOutput

Precheck level: Error, Warning, or Notice

Issues reported by the `check table x for upgrade` command

Before starting the upgrade to Aurora MySQL version 3, `check table for upgrade` is run on each table in the user schemas in your DB cluster. This precheck isn't the same as checkTableMysqlSchema.

The `check table for upgrade` command examines tables for any potential issues that might arise during an upgrade to a newer version of MySQL. Running this command before attempting an upgrade can help identify and resolve any incompatibilities ahead of time, making the actual upgrade process smoother.

This command performs various checks on each table, such as the following:

- Verifying that the table structure and metadata are compatible with the target MySQL version
- Checking for any deprecated or removed features used by the table
- Ensuring that the table can be properly upgraded without data loss

Unlike other prechecks, it can return an error, warning, or notice depending on the `check table` output. If this precheck returns any tables, review them carefully, along with the return code and message before initiating the upgrade. For more information, see CHECK TABLE statement in the MySQL documentation.

Here we provide an error example and a warning example.

Error example:

```
{
  "id": "checkTableOutput",
  "title": "Issues reported by 'check table x for upgrade' command",
  "status": "OK",
  "detectedProblems": [
      {
        "level": "Error",
```

```
        "dbObject": "test.parent",
        "description": "Table 'test.parent' doesn't exist"
      }
  ]
},
```

The precheck reports an error that the `test.parent` table doesn't exist.

The `mysql-error.log` file for the writer DB instance shows that there is a foreign key error.

```
2024-08-13T15:32:10.676893Z 62 [Warning] InnoDB: Load table `test`.`parent` failed,
 the table has missing foreign key indexes. Turn off 'foreign_key_checks' and try
 again.
2024-08-13T15:32:10.676905Z 62 [Warning] InnoDB: Cannot open table test/parent from
 the internal data dictionary of InnoDB though the .frm file for the table exists.
Please refer to http://dev.mysql.com/doc/refman/5.7/en/innodb-troubleshooting.html
 for how to resolve the issue.
```

Log into the writer DB instance and run `show engine innodb status\G` to get more information on the foreign key error.

```
mysql> show engine innodb status\G
*************************** 1. row ***************************
  Type: InnoDB
  Name:
Status:
=====================================
2024-08-13 15:33:33 0x14ef7b8a1700 INNODB MONITOR OUTPUT
=====================================
.
.
.
------------------------
LATEST FOREIGN KEY ERROR
------------------------
2024-08-13 15:32:10 0x14ef6dbbb700 Error in foreign key constraint of table test/
child:
there is no index in referenced table which would contain
the columns as the first columns, or the data types in the
referenced table do not match the ones in table. Constraint:
,
  CONSTRAINT `fk_pname` FOREIGN KEY (`p_name`) REFERENCES `parent` (`name`)
The index in the foreign key in table is p_name_idx
```

```
Please refer to http://dev.mysql.com/doc/refman/5.7/en/innodb-foreign-key-
constraints.html for correct foreign key definition.
.
.
```

The `LATEST FOREIGN KEY ERROR` message reports that the `fk_pname` foreign key constraint in the `test.child` table, which references the `test.parent` table,has either a missing index or data type mismatch. The MySQL documentation on foreign key constraints states that columns referenced in a foreign key must have an associated index, and the parent/child columns must use the same data type.

To verify whether this is related to a missing index or data type mismatch, log into the database and check the table definitions by temporarily disabling the session variable foreign_key_checks. After doing so, we can see that the child constraint in question (`fk_pname`) uses `p_name varchar(20) CHARACTER SET latin1 DEFAULT NULL` to reference the parent table `name varchar(20) NOT NULL`. The parent table uses `DEFAULT CHARSET=utf8`, but the child table's `p_name` column uses `latin1`, so the data type mismatch error is thrown.

```
mysql> show create table parent\G
ERROR 1146 (42S02): Table 'test.parent' doesn't exist

mysql> show create table child\G
*************************** 1. row ***************************
       Table: child
Create Table: CREATE TABLE `child` (
  `id` int(11) NOT NULL,
  `p_name` varchar(20) CHARACTER SET latin1 DEFAULT NULL,
  PRIMARY KEY (`id`),
  KEY `p_name_idx` (`p_name`),
  CONSTRAINT `fk_pname` FOREIGN KEY (`p_name`) REFERENCES `parent` (`name`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8
1 row in set (0.00 sec)

mysql> set foreign_key_checks=0;
Query OK, 0 rows affected (0.00 sec)

mysql> show create table parent\G
*************************** 1. row ***************************
       Table: parent
Create Table: CREATE TABLE `parent` (
```

```
  `name` varchar(20) NOT NULL,
  PRIMARY KEY (`name`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8
1 row in set (0.00 sec)

mysql> show create table child\G
*************************** 1. row ***************************
       Table: child
Create Table: CREATE TABLE `child` (
  `id` int(11) NOT NULL,
  `p_name` varchar(20) CHARACTER SET latin1 DEFAULT NULL,
  PRIMARY KEY (`id`),
  KEY `p_name_idx` (`p_name`),
  CONSTRAINT `fk_pname` FOREIGN KEY (`p_name`) REFERENCES `parent` (`name`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8
1 row in set (0.00 sec)
```

To resolve this issue, we can either change the child table to use the same character set as the parent, or change the parent to use the same character set as the child table. Here, because the child table explicitly uses `latin1` in the `p_name` column definition, we run `ALTER TABLE` to modify the character set to `utf8`.

```
mysql> alter table child modify p_name varchar(20) character set utf8 DEFAULT NULL;
Query OK, 0 rows affected (0.06 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> flush tables;
Query OK, 0 rows affected (0.01 sec)
```

After doing so, the precheck passes, and the upgrade can proceed.

Warning example:

```
{
  "id": "checkTableOutput",
  "title": "Issues reported by 'check table x for upgrade' command",
  "status": "OK",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "test.orders",
```

```
        "description": "Trigger test.orders.delete_audit_trigg does not have CREATED
 attribute."
      }
  ]
}
```

The precheck reports a warning for the `delete_audit_trigg` trigger on the `test.orders` table because it doesn't have a `CREATED` attribute. According to Checking version compatibility in the MySQL documentation, this message is informational, and is printed for triggers created before MySQL 5.7.2.

Because this is a warning, it doesn't block the upgrade from proceeding. However, if you wish to resolve the issue, you can re-create the trigger in question, and the precheck succeeds with no warnings.

```
{
  "id": "checkTableOutput",
  "title": "Issues reported by 'check table x for upgrade' command",
  "status": "OK",
  "detectedProblems": []
},
```

Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4

The following prechecks run when you upgrade from Aurora MySQL version 3 (compatible with MySQL 8.0) to Aurora MySQL version 8.4 (compatible with MySQL 8.4). These prechecks identify potential compatibility issues before the upgrade begins.

Contents

- Errors
  - MySQL prechecks that report errors
  - Aurora MySQL prechecks that report errors
- Warnings
  - MySQL prechecks that report warnings
  - Aurora MySQL prechecks that report warnings
- Notices
- Errors, warnings, or notices

Errors

The following prechecks generate errors when the precheck fails, and the upgrade can't proceed.

Topics

- MySQL prechecks that report errors
- Aurora MySQL prechecks that report errors

MySQL prechecks that report errors

The following prechecks are from Community MySQL:

- deprecatedRouterAuthMethod
- partitionsWithPrefixKeys
- columnDefinition

deprecatedRouterAuthMethod

Precheck level: Error

Check for deprecated or invalid authentication methods in use by MySQL Router internal accounts

This precheck validates that MySQL Router internal accounts are not using deprecated or invalid authentication methods that may be removed or changed in MySQL 8.4. MySQL Router accounts are automatically created at bootstrap time when the Router is not instructed to use an existing account.

Example output:


```
{
  "id": "deprecatedRouterAuthMethod",
  "title": "Check for deprecated or invalid authentication methods in use by MySQL
 Router internal accounts.",
  "status": "OK",
  "description": "Warning: The following accounts are MySQL Router accounts that use
 a deprecated authentication method.\nThose accounts are automatically created at
 bootstrap time when the Router is not instructed to use an existing account. Please
 upgrade MySQL Router to the latest version to ensure deprecated authentication
```

```
 methods are no longer used.\nSince version 8.0.19 it's also possible to instruct
 MySQL Router to use a dedicated account. That account can be created using the
 AdminAPI.",
  "documentationLink": "https://dev.mysql.com/doc/mysql-shell/en/
configuring-router-user.html https://dev.mysql.com/doc/mysql-router/en/
mysqlrouter.html#option_mysqlrouter_account",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "mysql_router_test@%",
        "description": " - router user with deprecated authentication method."
      }
  ]
}
```

The precheck returns an error because the `mysql_router_test` account is using a deprecated authentication method such as `mysql_native_password` or `sha256_password`.

To verify the authentication method in use:

```
SELECT user, host, plugin FROM mysql.user WHERE user = 'mysql_router_test';
```

Resolution:

Update the MySQL Router account to use `caching_sha2_password` authentication:

```
ALTER USER 'mysql_router_test'@'%' IDENTIFIED WITH caching_sha2_password BY
 'new_password';
```

Alternatively, upgrade MySQL Router to the latest version to ensure deprecated authentication methods are no longer used. Since version 8.0.19, you can also instruct MySQL Router to use a dedicated account created using the AdminAPI.

partitionsWithPrefixKeys

Precheck level: Error

Checks for partitions by key using columns with prefix key indexes

This precheck identifies partitioned tables that use columns with prefix key indexes in their partitioning key. Indexes on column prefixes are not supported for key partitioning—they are ignored by the partition function and are not allowed as of MySQL 8.4.0.

For more information, see Restrictions and limitations on partitioning in the MySQL documentation.

Example output:

```
{
  "id": "partitionsWithPrefixKeys",
  "title": "Checks for partitions by key using columns with prefix key indexes",
  "status": "OK",
  "description": "Indexes on column prefixes are not supported for key partitioning,
 they are ignored by the partition function and so they are not allowed as of 8.4.0.
 This check identifies tables with partitions defined this way, they should be fixed
 before upgrading to 8.4.0.",
  "documentationLink": "https://dev.mysql.com/doc/refman/en/partitioning-
limitations.html",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.test_partition_prefix",
        "description": "Error: the `test`.`test_partition_prefix` table uses
 partition by KEY using the following columns with prefix index: name."
      }
  ]
}
```

Resolution:

```
-- Check for prefix indexes (Sub_part column shows prefix length)
SHOW INDEX FROM test.test_partition_prefix;

-- Option 1: Change partition to use non-prefix columns only
ALTER TABLE test.test_partition_prefix PARTITION BY KEY (id) PARTITIONS 4;

-- Option 2: Remove prefix from index
ALTER TABLE test.test_partition_prefix
  DROP PRIMARY KEY,
  ADD PRIMARY KEY (id, name);  -- Full column, no prefix

-- Option 3: Remove partitioning
ALTER TABLE test.test_partition_prefix REMOVE PARTITIONING;
```

columnDefinition

Precheck level: Error

Checks for errors in column definitions

This precheck validates that all column definitions are compatible with MySQL 8.4 requirements. It specifically identifies columns of type FLOAT or DOUBLE with the AUTO_INCREMENT flag set, which is no longer supported in MySQL 8.4.

Example output:

```
{
  "id": "columnDefinition",
  "title": "Checks for errors in column definitions",
  "status": "OK",
  "description": "Identifies column definitions that may not be supported in future
 versions of MySQL",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.test_column_def.id",
        "description": "The column is of type FLOAT and has the AUTO_INCREMENT flag
 set, this is no longer supported."
      }
  ]
}
```

Resolution:

Change the column type from FLOAT or DOUBLE to an integer type:

```
-- Check current definition
SHOW CREATE TABLE test.test_column_def\G

-- Change FLOAT AUTO_INCREMENT to BIGINT AUTO_INCREMENT
ALTER TABLE test.test_column_def MODIFY COLUMN id BIGINT NOT NULL AUTO_INCREMENT;

-- Verify
SHOW CREATE TABLE test.test_column_def\G
```

Aurora MySQL prechecks that report errors

The following prechecks are specific to Aurora MySQL:

- auroraUnsupportedPluginsCheck
- auroraUnsupportedComponentsCheck
- auroraUpgradeCheckForSysSchemaObjectTypeMismatch
- auroraUpgradeCheckForFtsSyncInconsistency

auroraUnsupportedPluginsCheck

Precheck level: Error

Check for unsupported plugins

This Aurora-specific precheck identifies plugins that are not supported in Aurora MySQL version 8.4. Aurora has specific plugin compatibility requirements that differ from community MySQL.

Example output:

```
{
  "id": "auroraUnsupportedPluginsCheck",
  "title": "Check for unsupported plugins",
  "status": "OK",
  "description": "Checks for unsupported plugins installed in the database",
  "documentationLink": "https://docs.aws.amazon.com/AmazonRDS/latest/
AuroraMySQLReleaseNotes/",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "all",
        "description": "Plugin simple_parser loaded in the engine. To proceed with
 the upgrade, remove this plugin."
      }
  ]
}
```

Resolution:

Uninstall the unsupported plugins:

```
UNINSTALL PLUGIN plugin_name;
```

auroraUnsupportedComponentsCheck

Precheck level: Error

Check for unsupported components

This precheck validates that no MySQL components that are unsupported in Aurora MySQL version 8.4 are currently installed or active. Components are different from plugins and provide extended functionality through the component infrastructure.

Example output:

```
{
  "id": "auroraUnsupportedComponentsCheck",
  "title": "Check for unsupported components",
  "status": "OK",
  "description": "Checks for unsupported components installed in the database",
  "documentationLink": "https://docs.aws.amazon.com/AmazonRDS/latest/
AuroraMySQLReleaseNotes/",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "all",
        "description": "Component file://component_log_sink_json loaded in the
 engine. To proceed with the upgrade, uninstall this component."
      }
  ]
}
```

Resolution:

Uninstall the unsupported components:

```
UNINSTALL COMPONENT 'component_name';
```

auroraUpgradeCheckForSysSchemaObjectTypeMismatch

Precheck level: Error

Check object type mismatch for sys schema

This precheck validates that all objects in the `sys` schema have the correct object types and definitions. The sys schema is a system schema that provides views and procedures for database monitoring and diagnostics. Mismatches can occur if the schema was manually modified or corrupted.

Example output:

```
{
  "id": "auroraUpgradeCheckForSysSchemaObjectTypeMismatch",
  "title": "Check object type mismatch for sys schema.",
  "status": "OK",
  "description": "Database contains objects with type mismatch for sys schema.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "sys.host_summary",
        "description": "Your object sys.host_summary has a type mismatch. To fix the
 inconsistency we recommend to rename or remove the object before upgrading (use
 RENAME TABLE command)."
      }
  ]
}
```

Resolution:

```
-- Check the object type
SELECT TABLE_NAME, TABLE_TYPE FROM information_schema.tables
WHERE TABLE_SCHEMA = 'sys' AND TABLE_NAME = 'host_summary';

-- Option 1: Rename the mismatched object
RENAME TABLE sys.host_summary TO sys.host_summary_backup;

-- Option 2: Drop the mismatched object
DROP TABLE sys.host_summary;
```

auroraUpgradeCheckForFtsSyncInconsistency

Precheck level: Error

Check for FTS auxiliary table sync inconsistency

This precheck detects tables with InnoDB Full-Text Search (FTS) indexes where the internal sync mechanism failed. Specifically, it identifies cases where the `synced_doc_id` in the FTS configuration is less than the maximum document ID in the on-disk auxiliary index tables.

This condition indicates that FTS sync operations failed silently, for example because of duplicate key errors, so the in-memory FTS cache keeps growing instead of flushing to disk.

If left unresolved, this inconsistency can lead to data loss in Full-Text Search indexes during any restart or upgrade.

Example output:

```
{
  "id": "auroraUpgradeCheckForFtsSyncInconsistency",
  "title": "Check for FTS auxiliary table sync inconsistency",
  "status": "OK",
  "description": "Following table(s) has/have a potential duplicate key issue in the
 FTS auxiliary tables causing sync failures.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "mydb.my_fts_table",
        "description": "FTS sync is failing. Run 'ALTER TABLE
 `mydb`.`my_fts_table` FORCE' or 'OPTIMIZE TABLE `mydb`.`my_fts_table`' (with
 innodb_optimize_fulltext_only=OFF) or drop and recreate the FTS index (in separate
 statements) to rebuild the table before upgrade."
      }
  ]
}
```

How to identify affected tables:

To manually verify which tables have FTS sync inconsistencies, follow these steps:

1. List all tables with FULLTEXT indexes:

```
SELECT DISTINCT t.NAME
FROM information_schema.innodb_tables t
INNER JOIN information_schema.innodb_indexes i
  ON t.TABLE_ID = i.TABLE_ID
WHERE i.TYPE = 32
  AND t.NAME NOT LIKE 'mysql/%'
  AND t.NAME NOT LIKE 'sys/%';
```

2. For each table returned by the preceding query, set the `innodb_ft_aux_table` parameter to point to that table. Because this is a global variable, you must update it through your DB cluster parameter group:
   a. In the Amazon RDS console, choose **Parameter groups**.
   b. Edit your DB cluster parameter group and set `innodb_ft_aux_table` to the table name in `schema/table` format (for example, `mydb/my_fts_table`).
   c. Apply the parameter change. This takes effect immediately because it is a dynamic parameter.
3. After setting the parameter, connect to the database and run the following queries to check for inconsistency:

```
-- Verify the parameter is set correctly
SELECT @@GLOBAL.innodb_ft_aux_table;
-- Should return 'schema/table' (e.g., 'mydb/my_fts_table')

-- Check synced_doc_id
SELECT CAST(VALUE AS UNSIGNED) AS synced_doc_id
FROM INFORMATION_SCHEMA.INNODB_FT_CONFIG
WHERE `KEY` = 'synced_doc_id';

-- Check MAX(FIRST_DOC_ID) in the on-disk auxiliary index
SELECT MAX(FIRST_DOC_ID) AS max_first_doc_id
FROM INFORMATION_SCHEMA.INNODB_FT_INDEX_TABLE;

-- If synced_doc_id < max_first_doc_id, this table has an FTS sync inconsistency.
```

Repeat steps 2 and 3 for each table identified in step 1.

Resolution:

Use one of the following methods to rebuild the FTS index on each affected table:

```
-- Option 1: Drop and recreate the FULLTEXT index
ALTER TABLE `schema`.`table` DROP INDEX ft_index_name;
ALTER TABLE `schema`.`table` ADD FULLTEXT INDEX ft_index_name (column_name);

-- Option 2: Rebuild the table (rebuilds all indexes including FTS)
ALTER TABLE `schema`.`table` FORCE;

-- Option 3: Optimize the table with full rebuild
```

```
SET GLOBAL innodb_optimize_fulltext_only = OFF;
OPTIMIZE TABLE `schema`.`table`;
```

After applying the fix, retry the upgrade. The precheck passes after all affected tables have consistent FTS auxiliary data.

Warnings

The following prechecks generate warnings when the precheck fails, but the upgrade can proceed.

Topics

- MySQL prechecks that report warnings
- Aurora MySQL prechecks that report warnings

MySQL prechecks that report warnings

The following prechecks are from Community MySQL:

- deprecatedDefaultAuth
- foreignKeyReferences

deprecatedDefaultAuth

Precheck level: Warning

Check for deprecated or invalid default authentication methods in system variables

This precheck validates that the `default_authentication_plugin` system variable is not set to deprecated authentication methods.

> **Important**
>
> MySQL 8.4.0 removes the deprecated `default_authentication_plugin` option entirely. The `mysql_native_password` plugin is disabled by default as of MySQL 8.4.0 and is subject to removal in a future version.

For more information about authentication changes in version 8.4, see Security considerations for upgrading from Aurora MySQL version 3 to version 8.4.

Example output:

```
{
  "id": "deprecatedDefaultAuth",
  "title": "Check for deprecated or invalid default authentication methods in system
 variables.",
  "status": "OK",
  "description": "The following variables have problems with their set
 authentication method:",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "default_authentication_plugin",
        "description": "mysql_native_password authentication method is deprecated
 and it should be considered to correct this before upgrading to 8.4.0 release."
      },
      {
        "level": "Warning",
        "dbObject": "authentication_policy",
        "description": "mysql_native_password authentication method is deprecated
 and it should be considered to correct this before upgrading to 8.4.0 release."
      }
  ]
}
```

Resolution:

Update the authentication system variables to use `caching_sha2_password`:

1. Go to the Amazon RDS console and navigate to **Parameter groups**.
2. Select your DB cluster parameter group.
3. Modify the following parameters:
   - `default_authentication_plugin` = `caching_sha2_password`
   - `authentication_policy` = `caching_sha2_password,*,`
4. Apply the changes. A reboot may be required.

Ensure your application clients support `caching_sha2_password` authentication before making this change. Some older MySQL client libraries may not support this authentication method.

foreignKeyReferences

Precheck level: Warning

Checks for foreign keys not referencing a full unique index

This precheck ensures that all foreign key constraints reference complete unique or primary key indexes. Foreign keys to partial indexes may be forbidden as of MySQL 8.4.0.

Example output:

```
{
  "id": "foreignKeyReferences",
  "title": "Checks for foreign keys not referencing a full unique index",
  "status": "OK",
  "description": "Foreign keys to partial indexes may be forbidden as of 8.4.0, this
 check identifies such cases to warn the user.",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "sample.child_table_ibfk_1",
        "description": "invalid foreign key defined as 'child_table(parent_name)'
 references a non unique key at table 'parent_table'."
      }
  ]
}
```

Resolution:

Choose the option that works best with your application:

```
-- Option 1: Add unique index on parent table (if values are unique)
ALTER TABLE test.parent_table ADD UNIQUE INDEX idx_parent_name_unique (parent_name);

-- Option 2: Drop the foreign key if not needed
ALTER TABLE test.child_table DROP FOREIGN KEY child_table_ibfk_1;
```

Aurora MySQL prechecks that report warnings

The following prechecks are specific to Aurora MySQL:

- auroraValidatePasswordPluginCheck

auroraValidatePasswordPluginCheck

Precheck level: Warning

Check for deprecated validate_password plugin

This precheck identifies usage of the deprecated `validate_password` plugin. In MySQL 8.0+, the validate_password functionality was reimplemented as a component (`component_validate_password`). Aurora MySQL version 8.4 requires migration to the component-based implementation.

For more information, see Password validation component migration.

Example output:

```
{
  "id": "auroraValidatePasswordPluginCheck",
  "title": "Check for deprecated validate_password plugin",
  "status": "OK",
  "description": "The validate_password plugin is deprecated in Aurora MySQL 8.4",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "validate_password",
        "description": "The validate_password plugin is deprecated and will
 be removed in a future release. It is recommended to transition to the
 validate_password component."
      }
  ]
}
```

Resolution:

```
-- Check current plugin status
SELECT plugin_name, plugin_status FROM information_schema.plugins
WHERE plugin_name = 'validate_password';

-- Uninstall the plugin
UNINSTALL PLUGIN validate_password;

-- Install the component replacement
INSTALL COMPONENT 'file://component_validate_password';
```

```
-- Verify
SELECT * FROM mysql.component WHERE component_urn LIKE '%validate_password%';
```

Notices

The following precheck generates a notice when the precheck fails, but the upgrade can proceed.

- invalidPrivileges

invalidPrivileges

Precheck level: Notice

Checks for user privileges that will be removed

This precheck identifies user accounts with privileges that are being removed or modified in MySQL 8.4. The SET_USER_ID privilege is being removed as part of the upgrade process. If the privileges are not being used, no action is required. Otherwise, ensure they stop being used before the upgrade because they will be lost.

Example output:

```
{
  "id": "invalidPrivileges",
  "title": "Checks for user privileges that will be removed",
  "status": "OK",
  "description": "Verifies for users containing grants to be removed as part of the
 upgrade process.",
  "detectedProblems": [
      {
        "level": "Notice",
        "dbObject": "'test_user'@'localhost'",
        "description": "The user 'test_user'@'localhost' has the following
 privileges that will be removed as part of the upgrade process: SET_USER_ID"
      }
  ]
}
```

Resolution:

This is an informational notice—no action is required. The `SET_USER_ID` privilege will be automatically removed during the upgrade process.

However, if your application relies on the `SET_USER_ID` privilege, review and update your application before upgrading.

Errors, warnings, or notices

The following prechecks can return an error, warning, or notice depending on the precheck output.

- authMethodUsage
- pluginUsage
- checkTableCommand

authMethodUsage

Precheck level: Error, Warning, or Notice

Check for deprecated or invalid user authentication methods

This precheck identifies user accounts using authentication methods that are deprecated or will be removed in MySQL 8.4. The `mysql_native_password` authentication plugin is deprecated and disabled by default as of MySQL 8.4.0. The plugin is subject to removal in a future version.

The severity level is dynamic based on the feature lifecycle—Notice before deprecation, Warning after deprecation, Error after removal.

Example output:

```
{
  "id": "authMethodUsage",
  "title": "Check for deprecated or invalid user authentication methods.",
  "status": "OK",
  "description": "Some users are using authentication methods that may be deprecated
 or removed, please review the details below.",
  "detectedProblems": [
      {
        "level": "Warning",
        "dbObject": "testuser@localhost",
        "description": ""
```

```
      }
  ]
}
```

Resolution:

Update the user accounts to use `caching_sha2_password` authentication:

```
ALTER USER 'username'@'host' IDENTIFIED WITH caching_sha2_password BY
 'new_password';
```

> **Note**
>
> No action is required for Aurora internal system accounts. They are automatically updated during the upgrade process. Attempting to modify these accounts manually may cause issues with Aurora functionality.

pluginUsage

Precheck level: Error, Warning, or Notice

Check for deprecated or removed plugin usage

This precheck identifies plugins that have been deprecated or removed in MySQL 8.4. It examines all active plugins and reports their deprecation status. The severity level is dynamic based on the feature lifecycle.

Example output:

```
{
  "id": "pluginUsage",
  "title": "Check for deprecated or removed plugin usage.",
  "status": "OK",
  "description": "The following plugins are ACTIVE and they have been deprecated or
 removed.",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "keyring_file",
```

```
        "description": "The 'keyring_file' plugin is removed as of MySQL 8.4.0.
 It must not be used anymore, please use the 'component_keyring_file' component
 instead."
      }
  ]
}
```

Resolution:

Uninstall deprecated plugins and install their component replacements:

```
-- Check installed plugins
SELECT plugin_name, plugin_status FROM information_schema.plugins
WHERE plugin_name IN ('keyring_file', 'keyring_encrypted_file', 'keyring_oci',
 'authentication_fido');

-- Uninstall and replace (example for keyring_file)
UNINSTALL PLUGIN keyring_file;
INSTALL COMPONENT 'file://component_keyring_file';

-- Verify
SELECT * FROM mysql.component WHERE component_urn LIKE '%keyring%';
```

The following table lists deprecated plugins and their replacements:

Plugin	Replacement
keyring_file	component_keyring_file
keyring_encrypted_file	component_keyring_encrypted_file
keyring_oci	component_keyring_oci
authentication_fido	authentication_webauthn

checkTableCommand

Precheck level: Error, Warning, or Notice

Issues reported by the `check table x for upgrade` command

This precheck runs the `CHECK TABLE ... FOR UPGRADE` command on all user tables to identify structural issues, deprecated features, or incompatibilities with MySQL 8.4. The command performs a comprehensive validation of table structure and metadata.

Unlike other prechecks, it can return an error, warning, or notice depending on the `CHECK TABLE` output. If this precheck returns any tables, review them carefully along with the return code and message before initiating the upgrade.

Example output:

```
{
  "id": "checkTableCommand",
  "title": "Issues reported by 'check table x for upgrade' command",
  "status": "OK",
  "description": "Issues reported by 'check table x for upgrade' command",
  "detectedProblems": [
      {
        "level": "Error",
        "dbObject": "test.orphaned_view",
        "description": "View 'test.orphaned_view' references invalid table(s) or
 column(s) or function(s) or definer/invoker of view lack rights to use them"
      },
      {
        "level": "Error",
        "dbObject": "test.orphaned_view",
        "description": "Corrupt"
      }
  ]
}
```

Resolution:

Review the reported objects and fix or remove them before upgrading. Common issues include:

- Views referencing invalid tables or columns—drop or re-create the view.
- Corrupt tables—run `REPAIR TABLE` or re-create the table.
- Triggers with missing `CREATED` attribute—re-create the trigger.

For more information, see CHECK TABLE statement in the MySQL documentation.

How to perform an in-place upgrade

We recommend that you review the background material in How the Aurora MySQL in-place major version upgrade works.

Perform any preupgrade planning and testing, as described in Planning a major version upgrade for an Aurora MySQL cluster.


Console

The following example upgrades the `mydbcluster-cluster` DB cluster to Aurora MySQL version 3.04.1.

To upgrade the major version of an Aurora MySQL DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. If you used a custom parameter group for the original DB cluster, create a corresponding parameter group compatible with the new major version. Make any necessary adjustments to the configuration parameters in that new parameter group. For more information, see How in-place upgrades affect the parameter groups for a cluster.
3. In the navigation pane, choose **Databases**.
4. In the list, choose the DB cluster that you want to modify.
5. Choose **Modify**.
6. For **Version**, choose a new Aurora MySQL major version.

   We generally recommend using the latest minor version of the major version. Here, we choose the current default version.

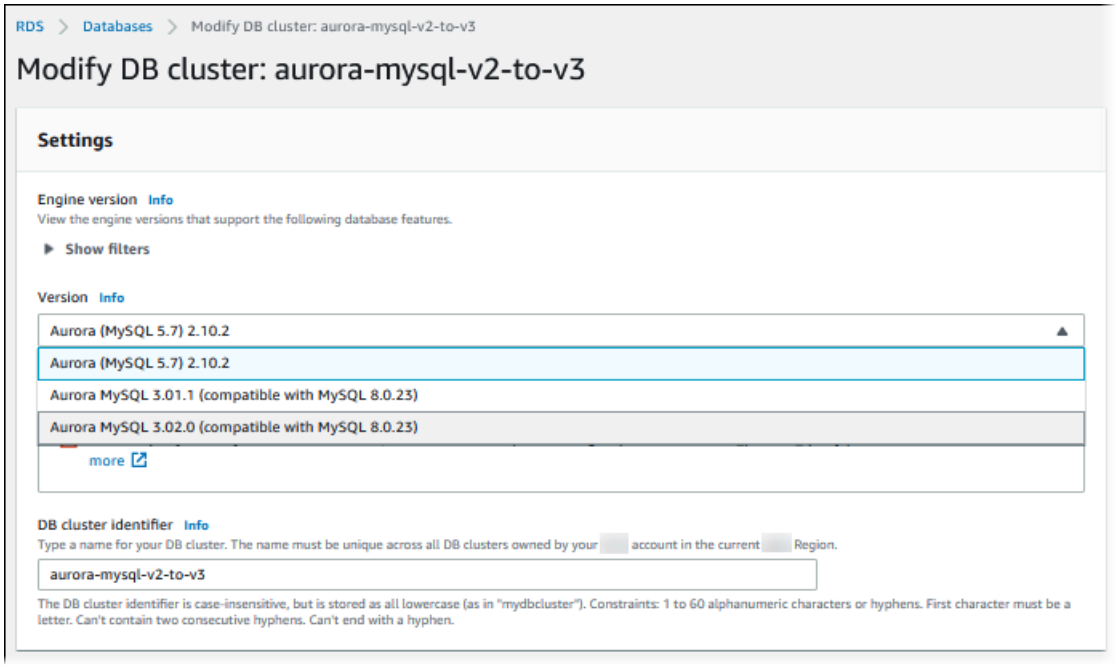

7. Choose **Continue**.
8. On the next page, specify when to perform the upgrade. Choose **During the next scheduled maintenance window** or **Immediately**.
9. (Optional) Periodically examine the **Events** page in the RDS console during the upgrade. Doing so helps you to monitor the progress of the upgrade and identify any issues. If the upgrade encounters any issues, consult Troubleshooting for Aurora MySQL in-place upgrade for the steps to take.
10. If you created a new parameter group at the start of this procedure, associate the custom parameter group with your upgraded cluster. For more information, see How in-place upgrades affect the parameter groups for a cluster.

> **Note**
>
> Performing this step requires you to restart the cluster again to apply the new parameter group.

11. (Optional) After you complete any post-upgrade testing, delete the manual snapshot that Aurora created at the beginning of the upgrade.

Amazon CLI

To upgrade the major version of an Aurora MySQL DB cluster, use the Amazon CLI modify-db-cluster command with the following required parameters:

- `--db-cluster-identifier`
- `--engine-version`
- `--allow-major-version-upgrade`
- `--apply-immediately` or `--no-apply-immediately`

If your cluster uses any custom parameter groups, also include one or both of the following options:

- `--db-cluster-parameter-group-name`, if the cluster uses a custom cluster parameter group
- `--db-instance-parameter-group-name`, if any instances in the cluster use a custom DB parameter group

The following example upgrades the `sample-cluster` DB cluster to Aurora MySQL version 3.04.1. The upgrade happens immediately, instead of waiting for the next maintenance window.

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
          --db-cluster-identifier sample-cluster \
          --engine-version 8.0.mysql_aurora.3.04.1 \
          --allow-major-version-upgrade \
          --apply-immediately
```

For Windows:

```
aws rds modify-db-cluster ^
          --db-cluster-identifier sample-cluster ^
          --engine-version 8.0.mysql_aurora.3.04.1 ^
          --allow-major-version-upgrade ^
          --apply-immediately
```

You can combine other CLI commands with `modify-db-cluster` to create an automated end-to-end process for performing and verifying upgrades. For more information and examples, see Aurora MySQL in-place upgrade tutorial.

> **Note**
>
> If your cluster is part of an Aurora global database, the in-place upgrade procedure is slightly different. You call the modify-global-cluster command operation instead of `modify-db-cluster`. For more information, see In-place major upgrades for global databases.

RDS API

To upgrade the major version of an Aurora MySQL DB cluster, use the RDS API operation ModifyDBCluster with the following required parameters:

- `DBClusterIdentifier`
- `Engine`
- `EngineVersion`
- `AllowMajorVersionUpgrade`
- `ApplyImmediately` (set to `true` or `false`)

> **Note**
>
> If your cluster is part of an Aurora global database, the in-place upgrade procedure is slightly different. You call the ModifyGlobalCluster operation instead of `ModifyDBCluster`. For more information, see In-place major upgrades for global databases.

How in-place upgrades affect the parameter groups for a cluster

Aurora parameter groups have different sets of configuration settings for clusters that are compatible with different MySQL versions. When you perform an in-place upgrade, the upgraded cluster and all its instances must use the corresponding cluster and instance parameter groups that are compatible with the new major version.

If your cluster and instances use the default parameter groups for the source version, the upgraded cluster and instances automatically start with the default parameter groups for the target version. If your cluster and instances use any custom parameter groups, make sure to create corresponding parameter groups that are compatible with the target version. Also make sure to specify those during the upgrade process.

The following table shows the default parameter group mapping for each upgrade path:

Upgrade path	Source default parameter group	Target default parameter group
Aurora MySQL version 2 to version 3	`default.aurora-mysql5.7`	`default.aurora-mysql8.0`
Aurora MySQL version 3 to version 8.4	`default.aurora-mysql8.0`	`default.aurora-mysql8.4`

Note

For most parameter settings, you can choose the custom parameter group at two points. These are when you create the cluster or associate the parameter group with the cluster later.
However, if you use a nondefault setting for the `lower_case_table_names` parameter, you must set up the custom parameter group with this setting in advance. Then specify the parameter group when you perform the snapshot restore to create the cluster. Any change to the `lower_case_table_names` parameter has no effect after the cluster is created.
We recommend that you use the same setting for `lower_case_table_names` when you perform a major version upgrade.
With an Aurora global database based on Aurora MySQL, you can perform an in-place major version upgrade only if you set the `lower_case_table_names` parameter to default and reboot your global database. For more information on the methods that you can use, see Major version upgrades.

Changes to cluster properties between Aurora MySQL versions

When you perform a major version upgrade, make sure to check any applications or scripts that you use to set up or manage Aurora MySQL clusters and DB instances.

Also, change your code that manipulates parameter groups to account for the fact that the default parameter group names are different for each major version.

Aurora MySQL version 2 to version 3

For example, you might have code like the following that applies to your cluster before an upgrade.

```
# Check the default parameter values for MySQL 5.7-compatible clusters.
aws rds describe-db-parameters --db-parameter-group-name default.aurora-mysql5.7 --
region us-east-1
```

After upgrading the major version of the cluster, modify that code as follows.

```
# Check the default parameter values for MySQL 8.0-compatible clusters.
aws rds describe-db-parameters --db-parameter-group-name default.aurora-mysql8.0 --
region us-east-1
```

Aurora MySQL version 3 to version 8.4

Similarly, if you have code referencing the version 3 default parameter group, update it after the upgrade.

```
# Before upgrade: Check the default parameter values for MySQL 8.0-compatible clusters.
aws rds describe-db-parameters --db-parameter-group-name default.aurora-mysql8.0 --
region us-east-1
```

```
# After upgrade: Check the default parameter values for MySQL 8.4-compatible clusters.
aws rds describe-db-parameters --db-parameter-group-name default.aurora-mysql8.4 --
region us-east-1
```


In-place major upgrades for global databases

For an Aurora global database, you upgrade the global database cluster. Aurora automatically upgrades all of the clusters at the same time and makes sure that they all run the same engine

version. This requirement is because any changes to system tables, data file formats, and so on, are automatically replicated to all the secondary clusters.

Follow the instructions in How the Aurora MySQL in-place major version upgrade works. When you specify what to upgrade, make sure to choose the global database cluster instead of one of the clusters it contains.

If you use the Amazon Web Services Management Console, choose the item with the role **Global database**.

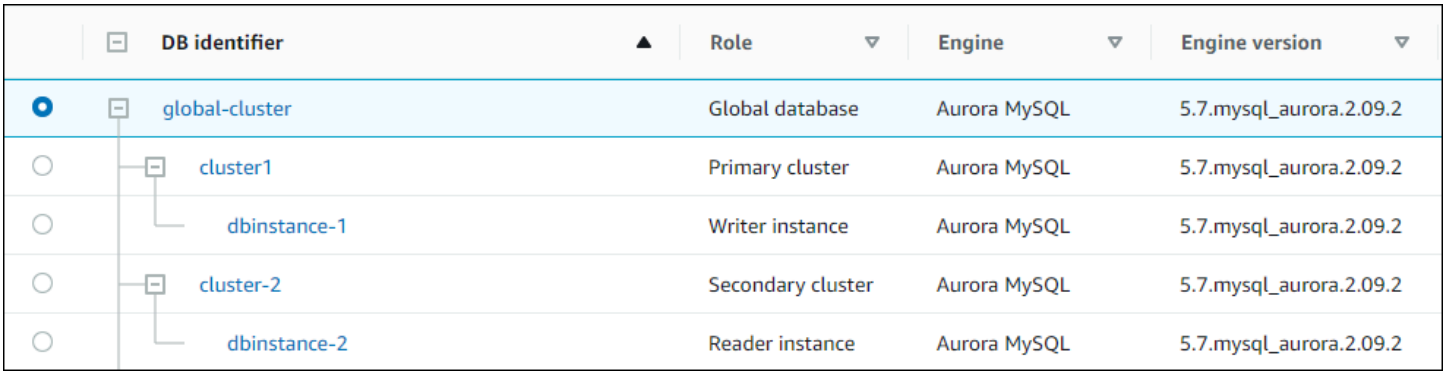

DB identifier	Role	Engine	Engine version
global-cluster	Global database	Aurora MySQL	5.7.mysql_aurora.2.09.2
cluster1	Primary cluster	Aurora MySQL	5.7.mysql_aurora.2.09.2
dbinstance-1	Writer instance	Aurora MySQL	5.7.mysql_aurora.2.09.2
cluster-2	Secondary cluster	Aurora MySQL	5.7.mysql_aurora.2.09.2
dbinstance-2	Reader instance	Aurora MySQL	5.7.mysql_aurora.2.09.2

If you use the Amazon CLI or RDS API, start the upgrade process by calling the modify-global-cluster command or ModifyGlobalCluster operation. You use one of these instead of `modify-db-cluster` or `ModifyDBCluster`.

> **Note**
>
> You can't specify a custom parameter group for the global database cluster while you're performing a major version upgrade of that Aurora global database. Create your custom parameter groups in each Region of the global cluster. Then apply them manually to the Regional clusters after the upgrade.

To upgrade the major version of an Aurora MySQL global database cluster by using the Amazon CLI, use the modify-global-cluster command with the following required parameters:

- `--global-cluster-identifier`
- `--engine aurora-mysql`
- `--engine-version`
- `--allow-major-version-upgrade`

The following example upgrades the global database cluster to Aurora MySQL version 3.04.2.

Example

For Linux, macOS, or Unix:

```
aws rds modify-global-cluster \
          --global-cluster-identifier global_cluster_identifier \
          --engine aurora-mysql \
          --engine-version 8.0.mysql_aurora.3.04.2 \
          --allow-major-version-upgrade
```

For Windows:

```
aws rds modify-global-cluster ^
          --global-cluster-identifier global_cluster_identifier ^
          --engine aurora-mysql ^
          --engine-version 8.0.mysql_aurora.3.04.2 ^
          --allow-major-version-upgrade
```

In-place upgrades for DB clusters with cross-Region read replicas

You can upgrade an Aurora DB cluster that has a cross-Region read replica using the in-place upgrade procedure, but there are certain considerations:

- You must upgrade the read replica DB cluster first. If you try to upgrade the primary cluster first, you will receive an error message such as the following:

  Unable to upgrade DB cluster test-xr-primary-cluster because the associated Aurora cross-Region replica test-xr-replica-cluster isn't patched yet. Upgrade the Aurora cross-Region replica and try again.

  This means that the primary DB cluster can't have a higher DB engine version than the replica cluster.
- Before you upgrade the primary DB cluster, stop the write workload and disable any new connection requests to the writer DB instance of the primary cluster.
- When you upgrade the primary cluster, choose a custom DB cluster parameter group with the `binlog_format` parameter set to a value that supports binary logging replication, such as `MIXED`.

For more information about using binary logging with Aurora MySQL, see Replication between Aurora and MySQL or between Aurora and another Aurora DB cluster (binary log replication). For more information about modifying Aurora MySQL configuration parameters, see Aurora MySQL configuration parameters and Parameter groups for Amazon Aurora.

- Don't wait a long time to upgrade the primary DB cluster after you upgrade the replica cluster. We recommend not waiting longer than the next maintenance window.
- After you upgrade the primary DB cluster, reboot its writer DB instance. The custom DB cluster parameter group that enables binlog replication doesn't take effect until the writer DB instance is rebooted.
- Don't resume the write workload or enable connections to the writer DB instance until you confirm that cross-Region replication has restarted, and that the replica lag in the secondary Amazon Web Services Region is 0.

Aurora MySQL in-place upgrade tutorial

The following Linux examples show how you might perform the general steps of the in-place upgrade procedure using the Amazon CLI.

This first example creates an Aurora DB cluster that's running a 2.x version of Aurora MySQL. The cluster includes a writer DB instance and a reader DB instance. The `wait db-instance-available` command pauses until the writer DB instance is available. That's the point when the cluster is ready to be upgraded.

```
aws rds create-db-cluster --db-cluster-identifier mynewdbcluster --engine aurora-mysql
 \
  --db-cluster-version 5.7.mysql_aurora.2.11.2
...
aws rds create-db-instance --db-instance-identifier mynewdbcluster-instance1 \
  --db-cluster-identifier mynewdbcluster --db-instance-class db.t4g.medium --engine
 aurora-mysql
...
aws rds wait db-instance-available --db-instance-identifier mynewdbcluster-instance1
```

The Aurora MySQL 3.x versions that you can upgrade the cluster to depend on the 2.x version that the cluster is currently running and on the Amazon Web Services Region where the cluster is located. The first command, with `--output text`, just shows the available target version. The second command shows the full JSON output of the response. In that response, you can see details

such as the `aurora-mysql` value that you use for the `engine` parameter. You can also see the fact that upgrading to 3.04.0 represents a major version upgrade.

```
aws rds describe-db-clusters --db-cluster-identifier mynewdbcluster \
  --query '*[].{EngineVersion:EngineVersion}' --output text
5.7.mysql_aurora.2.11.2

aws rds describe-db-engine-versions --engine aurora-mysql --engine-version
 5.7.mysql_aurora.2.11.2 \
  --query '*[].[ValidUpgradeTarget]'
...
{
    "Engine": "aurora-mysql",
    "EngineVersion": "8.0.mysql_aurora.3.04.0",
    "Description": "Aurora MySQL 3.04.0 (compatible with MySQL 8.0.28)",
    "AutoUpgrade": false,
    "IsMajorVersionUpgrade": true,
    "SupportedEngineModes": [
        "provisioned"
    ],
    "SupportsParallelQuery": true,
    "SupportsGlobalDatabases": true,
    "SupportsBabelfish": false,
    "SupportsIntegrations": false
},
...
```

This example shows how if you enter a target version number that isn't a valid upgrade target for the cluster, Aurora doesn't perform the upgrade. Aurora also doesn't perform a major version upgrade unless you include the `--allow-major-version-upgrade` parameter. That way, you can't accidentally perform an upgrade that has the potential to require extensive testing and changes to your application code.

```
aws rds modify-db-cluster --db-cluster-identifier mynewdbcluster \
  --engine-version 5.7.mysql_aurora.2.09.2 --apply-immediately
An error occurred (InvalidParameterCombination) when calling the ModifyDBCluster
 operation: Cannot find upgrade target from 5.7.mysql_aurora.2.11.2 with requested
 version 5.7.mysql_aurora.2.09.2.

aws rds modify-db-cluster --db-cluster-identifier mynewdbcluster \
  --engine-version 8.0.mysql_aurora.3.04.0 --region us-east-1 --apply-immediately
```

```
An error occurred (InvalidParameterCombination) when calling the ModifyDBCluster
 operation: The AllowMajorVersionUpgrade flag must be present when upgrading to a new
 major version.

aws rds modify-db-cluster --db-cluster-identifier mynewdbcluster \
  --engine-version 8.0.mysql_aurora.3.04.0 --apply-immediately --allow-major-version-
upgrade
{
  "DBClusterIdentifier": "mynewdbcluster",
  "Status": "available",
  "Engine": "aurora-mysql",
  "EngineVersion": "5.7.mysql_aurora.2.11.2"
}
```

It takes a few moments for the status of the cluster and associated DB instances to change to `upgrading`. The version numbers for the cluster and DB instances only change when the upgrade is finished. Again, you can use the `wait db-instance-available` command for the writer DB instance to wait until the upgrade is finished before proceeding.

```
aws rds describe-db-clusters --db-cluster-identifier mynewdbcluster \
  --query '*[].[Status,EngineVersion]' --output text
upgrading 5.7.mysql_aurora.2.11.2

aws rds describe-db-instances --db-instance-identifier mynewdbcluster-instance1 \
  --query '*[].
{DBInstanceIdentifier:DBInstanceIdentifier,DBInstanceStatus:DBInstanceStatus} | [0]'
{
    "DBInstanceIdentifier": "mynewdbcluster-instance1",
    "DBInstanceStatus": "upgrading"
}

aws rds wait db-instance-available --db-instance-identifier mynewdbcluster-instance1
```

At this point, the version number for the cluster matches the one that was specified for the upgrade.

```
aws rds describe-db-clusters --db-cluster-identifier mynewdbcluster \
  --query '*[].[EngineVersion]' --output text

8.0.mysql_aurora.3.04.0
```

The preceding example did an immediate upgrade by specifying the `--apply-immediately` parameter. To let the upgrade happen at a convenient time when the cluster isn't expected to be busy, you can specify the `--no-apply-immediately` parameter. Doing so makes the upgrade start during the next maintenance window for the cluster. The maintenance window defines the period during which maintenance operations can start. A long-running operation might not finish during the maintenance window. Thus, you don't need to define a larger maintenance window even if you expect that the upgrade might take a long time.

The following example upgrades a cluster that's initially running Aurora MySQL version 2.11.2. In the `describe-db-engine-versions` output, the `False` and `True` values represent the `IsMajorVersionUpgrade` property. From version 2.11.2, you can upgrade to some other 2.* versions. Those upgrades aren't considered major version upgrades and so don't require an in-place upgrade. In-place upgrade is only available for upgrades to the 3.* versions that are shown in the list.

```
aws rds describe-db-clusters --db-cluster-identifier mynewdbcluster \
  --query '*[].{EngineVersion:EngineVersion}' --output text
5.7.mysql_aurora.2.11.2

aws rds describe-db-engine-versions --engine aurora-mysql --engine-version
 5.7.mysql_aurora.2.10.2 \
  --query '*[].[ValidUpgradeTarget]|[0][0]|[*].[EngineVersion,IsMajorVersionUpgrade]'
 --output text

5.7.mysql_aurora.2.11.3 False
5.7.mysql_aurora.2.11.4 False
5.7.mysql_aurora.2.11.5 False
5.7.mysql_aurora.2.11.6 False
5.7.mysql_aurora.2.12.0 False
5.7.mysql_aurora.2.12.1 False
5.7.mysql_aurora.2.12.2 False
5.7.mysql_aurora.2.12.3 False
8.0.mysql_aurora.3.04.0 True
8.0.mysql_aurora.3.04.1 True
8.0.mysql_aurora.3.04.2 True
8.0.mysql_aurora.3.04.3 True
8.0.mysql_aurora.3.05.2 True
8.0.mysql_aurora.3.06.0 True
8.0.mysql_aurora.3.06.1 True
8.0.mysql_aurora.3.07.1 True
```

```
aws rds modify-db-cluster --db-cluster-identifier mynewdbcluster \
  --engine-version 8.0.mysql_aurora.3.04.0 --no-apply-immediately --allow-major-
version-upgrade
...
```

When a cluster is created without a specified maintenance window, Aurora picks a random day of the week. In this case, the `modify-db-cluster` command is submitted on a Monday. Thus, we change the maintenance window to be Tuesday morning. All times are represented in the UTC time zone. The `tue:10:00-tue:10:30` window corresponds to 2:00-2:30 AM Pacific time. The change in the maintenance window takes effect immediately.

```
aws rds describe-db-clusters --db-cluster-identifier mynewdbcluster --query '*[].
[PreferredMaintenanceWindow]'
[
    [
        "sat:08:20-sat:08:50"
    ]
]

aws rds modify-db-cluster --db-cluster-identifier mynewdbcluster --preferred-
maintenance-window tue:10:00-tue:10:30"
aws rds describe-db-clusters --db-cluster-identifier mynewdbcluster --query '*[].
[PreferredMaintenanceWindow]'
[
    [
        "tue:10:00-tue:10:30"
    ]
]
```

The following example shows how to get a report of the events generated by the upgrade. The `--duration` argument represents the number of minutes to retrieve the event information. This argument is needed, because by default `describe-events` only returns events from the last hour.

```
aws rds describe-events --source-type db-cluster --source-identifier mynewdbcluster --
duration 20160
{
    "Events": [
        {
            "SourceIdentifier": "mynewdbcluster",
            "SourceType": "db-cluster",
            "Message": "DB cluster created",
            "EventCategories": [
```

```
                "creation"
            ],
            "Date": "2022-11-17T01:24:11.093000+00:00",
            "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:mynewdbcluster"
        },
        {
            "SourceIdentifier": "mynewdbcluster",
            "SourceType": "db-cluster",
            "Message": "Upgrade in progress: Performing online pre-upgrade checks.",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2022-11-18T22:57:08.450000+00:00",
            "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:mynewdbcluster"
        },
        {
            "SourceIdentifier": "mynewdbcluster",
            "SourceType": "db-cluster",
            "Message": "Upgrade in progress: Performing offline pre-upgrade checks.",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2022-11-18T22:57:59.519000+00:00",
            "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:mynewdbcluster"
        },
        {
            "SourceIdentifier": "mynewdbcluster",
            "SourceType": "db-cluster",
            "Message": "Upgrade in progress: Creating pre-upgrade snapshot [preupgrade-
mynewdbcluster-5-7-mysql-aurora-2-10-2-to-8-0-mysql-aurora-3-02-0-2022-11-18-22-55].",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2022-11-18T23:00:22.318000+00:00",
            "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:mynewdbcluster"
        },
        {
            "SourceIdentifier": "mynewdbcluster",
            "SourceType": "db-cluster",
            "Message": "Upgrade in progress: Cloning volume.",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2022-11-18T23:01:45.428000+00:00",
```

```
            "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:mynewdbcluster"
        },
        {
            "SourceIdentifier": "mynewdbcluster",
            "SourceType": "db-cluster",
            "Message": "Upgrade in progress: Purging undo records for old row versions.
Records remaining: 164",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2022-11-18T23:02:25.141000+00:00",
            "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:mynewdbcluster"
        },
        {
            "SourceIdentifier": "mynewdbcluster",
            "SourceType": "db-cluster",
            "Message": "Upgrade in progress: Purging undo records for old row versions.
Records remaining: 164",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2022-11-18T23:06:23.036000+00:00",
            "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:mynewdbcluster"
        },
        {
            "SourceIdentifier": "mynewdbcluster",
            "SourceType": "db-cluster",
            "Message": "Upgrade in progress: Upgrading database objects.",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2022-11-18T23:06:48.208000+00:00",
            "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:mynewdbcluster"
        },
        {
            "SourceIdentifier": "mynewdbcluster",
            "SourceType": "db-cluster",
            "Message": "Database cluster major version has been upgraded",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2022-11-18T23:10:28.999000+00:00",
            "SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:mynewdbcluster"
        }
```

```
    ]
}
```

Finding the reasons for Aurora MySQL major version upgrade failures

In the tutorial, the upgrade from Aurora MySQL version 2 to version 3 succeeded. But if the upgrade had failed, you would want to know why.

You can start by using the `describe-events` Amazon CLI command to look at the DB cluster events. This example shows the events for `mydbcluster` for the last 10 hours.

```
aws rds describe-events \
    --source-type db-cluster \
    --source-identifier mydbcluster \
    --duration 600
```

In this case, we had an upgrade precheck failure.

```
{
    "Events": [
        {
            "SourceIdentifier": "mydbcluster",
            "SourceType": "db-cluster",
            "Message": "Database cluster engine version upgrade started.",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2024-04-11T13:23:22.846000+00:00",
            "SourceArn": "arn:aws:rds:us-east-1:123456789012:cluster:mydbcluster"
        },
        {
            "SourceIdentifier": "mydbcluster",
            "SourceType": "db-cluster",
            "Message": "Database cluster is in a state that cannot be upgraded: Upgrade
 prechecks failed. For more details, see the
             upgrade-prechecks.log file. For more information on troubleshooting the
 cause of the upgrade failure, see
             https://docs.aws.amazon.com/AmazonRDS/latest/AuroraUserGuide/
AuroraMySQL.Upgrading.Troubleshooting.html",
            "EventCategories": [
                "maintenance"
            ],
            "Date": "2024-04-11T13:23:24.373000+00:00",
```

```
            "SourceArn": "arn:aws:rds:us-east-1:123456789012:cluster:mydbcluster"
        }
    ]
}
```

To diagnose the exact cause of the problem, examine the database logs for the writer DB instance. When an upgrade to Aurora MySQL version 3 fails, the writer instance contains a log file with the name `upgrade-prechecks.log`. This example shows how to detect the presence of that log and then download it to a local file for examination.

```
aws rds describe-db-log-files --db-instance-identifier mydbcluster-instance \
    --query '*[].[LogFileName]' --output text

error/mysql-error-running.log
error/mysql-error-running.log.2024-04-11.20
error/mysql-error-running.log.2024-04-11.21
error/mysql-error.log
external/mysql-external.log
upgrade-prechecks.log

aws rds download-db-log-file-portion --db-instance-identifier mydbcluster-instance \
    --log-file-name upgrade-prechecks.log \
    --starting-token 0 \
    --output text >upgrade_prechecks.log
```

The `upgrade-prechecks.log` file is in JSON format. We download it using the `--output text` option to avoid encoding JSON output within another JSON wrapper. For Aurora MySQL version 3 upgrades, this log always includes certain informational and warning messages. It only includes error messages if the upgrade fails. If the upgrade succeeds, the log file isn't produced at all.

To summarize all of the errors and display the associated object and description fields, you can run the command `grep -A 2 '"level": "Error"'` on the contents of the `upgrade-prechecks.log` file. Doing so displays each error line and the two lines after it. These contain the name of the corresponding database object and guidance about how to correct the problem.

```
$ cat upgrade-prechecks.log | grep -A 2 '"level": "Error"'

"level": "Error",
"dbObject": "problematic_upgrade.dangling_fulltext_index",
"description": "Table `problematic_upgrade.dangling_fulltext_index` contains dangling
 FULLTEXT index. Kindly recreate the table before upgrade."
```

In this example, you can run the following SQL command on the offending table to try to fix the issue, or you can re-create the table without the dangling index.

```
OPTIMIZE TABLE problematic_upgrade.dangling_fulltext_index;
```

Then retry the upgrade.

Troubleshooting for Aurora MySQL in-place upgrade

Use the following tips to help troubleshoot problems with Aurora MySQL in-place upgrades. These tips don't apply to Aurora Serverless DB clusters.

Reason for in-place upgrade being canceled or slow	Effect	Solution to allow in-place upgrade to complete within maintenance window
Associated Aurora cross-Region replica isn't patched yet	Aurora cancels the upgrade.	Upgrade the Aurora cross-Region replica and try again.
Cluster has XA transactions in the prepared state	Aurora cancels the upgrade.	Commit or roll back all prepared XA transactions.
Cluster is processing any data definition language (DDL) statements	Aurora cancels the upgrade.	Consider waiting and performing the upgrade after all DDL statements are finished.
Cluster has uncommitted changes for many rows	Upgrade might take a long time.	The upgrade process rolls back the uncommitted changes. The indicator for this condition is the value of `TRX_ROWS_MODIFIED` in the `INFORMATION_SCHEMA.INNODB_TRX` table. Consider performing the upgrade only after all large transactions are committed or rolled back.

Reason for in-place upgrade being canceled or slow	Effect	Solution to allow in-place upgrade to complete within maintenance window
Cluster has high number of undo records	Upgrade might take a long time.	Even if the uncommitted transactions don't affect a large number of rows, they might involve a large volume of data. For example, you might be inserting large BLOBs. Aurora doesn't automatically detect or generate an event for this kind of transaction activity. The indicator for this condition is the history list length (HLL). The upgrade process rolls back the uncommitted changes. You can check the HLL in the output from the `SHOW ENGINE INNODB STATUS` SQL command, or directly by using the following SQL query: `SELECT count FROM information_schema .innodb_metrics WHERE name = 'trx_rseg_history_len';` You can also monitor the `RollbackSegmentHistoryListLength` metric in Amazon CloudWatch. Consider performing the upgrade only after the HLL is smaller.

Reason for in-place upgrade being canceled or slow	Effect	Solution to allow in-place upgrade to complete within maintenance window
Cluster is in the process of committing a large binary log transaction	Upgrade might take a long time.	The upgrade process waits until the binary log changes are applied. More transactions or DDL statements could start during this period, further slowing down the upgrade process. Schedule the upgrade process when the cluster isn't busy with generating binary log replication changes. Aurora doesn't automatic ally detect or generate an event for this condition.
Schema inconsistencies resulting from file removal or corruption	Aurora cancels the upgrade.	Change the default storage engine for temporary tables from MyISAM to InnoDB. Perform the following steps: 1. Modify the `default_tmp_storag e_engine` DB parameter to `InnoDB`. 2. Reboot the DB cluster. 3. After rebooting, confirm that the `default_tmp_storage_engine` DB parameter is set to `InnoDB`. Use the following command: `show global variables like 'default_ tmp_storage_engine';` 4. Make sure not to create any temporary tables that use the MyISAM storage engine. We recommend that you pause any database workload and not create any new database connections, because you're upgrading soon. 5. Try the in-place upgrade again.

Reason for in-place upgrade being canceled or slow	Effect	Solution to allow in-place upgrade to complete within maintenance window

Master user was deleted	Aurora cancels the upgrade.	**Important**
		Don't delete the master user.
		
		However, if for some reason you should happen to delete the master user, restore it using the following SQL commands:
		
		`CREATE USER 'master_username '@'%' IDENTIFIED BY ' master_user_password ' REQUIRE NONE PASSWORD EXPIRE DEFAULT ACCOUNT UNLOCK;`
		
		`GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP, RELOAD, PROCESS, REFERENCES, INDEX, ALTER, SHOW DATABASES, CREATE TEMPORARY TABLES, LOCK TABLES, EXECUTE, REPLICATION SLAVE, REPLICATION CLIENT, CREATE VIEW, SHOW VIEW, CREATE ROUTINE, ALTER ROUTINE, CREATE USER, EVENT, TRIGGER, LOAD FROM S3, SELECT INTO S3, INVOKE LAMBDA, INVOKE SAGEMAKER, INVOKE COMPREHEND ON *.* TO 'master_username '@'%' WITH GRANT OPTION;`

For more details on troubleshooting issues that cause upgrade prechecks to fail, see the following blogs:

- Amazon Aurora MySQL version 2 (with MySQL 5.7 compatibility) to version 3 (with MySQL 8.0 compatibility) upgrade checklist, Part 1
- Amazon Aurora MySQL version 2 (with MySQL 5.7 compatibility) to version 3 (with MySQL 8.0 compatibility) upgrade checklist, Part 2

You can use the following steps to perform your own checks for some of the conditions in the preceding table. That way, you can schedule the upgrade at a time when you know the database is in a state where the upgrade can complete successfully and quickly.

- You can check for open XA transactions by executing the `XA RECOVER` statement. You can then commit or roll back the XA transactions before starting the upgrade.
- You can check for DDL statements by executing a `SHOW PROCESSLIST` statement and looking for `CREATE`, `DROP`, `ALTER`, `RENAME`, and `TRUNCATE` statements in the output. Allow all DDL statements to finish before starting the upgrade.
- You can check the total number of uncommitted rows by querying the `INFORMATION_SCHEMA.INNODB_TRX` table. The table contains one row for each transaction. The `TRX_ROWS_MODIFIED` column contains the number of rows modified or inserted by the transaction.
- You can check the length of the InnoDB history list by executing the `SHOW ENGINE INNODB STATUS SQL` statement and looking for the `History list length` in the output. You can also check the value directly by running the following query:

  ```
  SELECT count FROM information_schema.innodb_metrics WHERE name =
   'trx_rseg_history_len';
  ```

  The length of the history list corresponds to the amount of undo information stored by the database to implement multi-version concurrency control (MVCC).

Post-upgrade cleanup for Aurora MySQL version 3

After you finish upgrading any Aurora MySQL version 2 clusters to Aurora MySQL version 3, you can perform these other cleanup actions:

- Create new MySQL 8.0–compatible versions of any custom parameter groups. Apply any necessary custom parameter values to the new parameter groups.
- Update any CloudWatch alarms, setup scripts, and so on to use the new names for any metrics whose names were affected by inclusive language changes. For a list of such metrics, see Inclusive language changes for Aurora MySQL version 3.
- Update any Amazon CloudFormation templates to use the new names for any configuration parameters whose names were affected by inclusive language changes. For a list of such parameters, see Inclusive language changes for Aurora MySQL version 3.

Spatial indexes

After upgrading to Aurora MySQL version 3, check if you need to drop or recreate objects and indexes related to spatial indexes. Before MySQL 8.0, Aurora could optimize spatial queries using indexes that didn't contain a spatial resource identifier (SRID). Aurora MySQL version 3 only uses spatial indexes containing SRIDs. During an upgrade, Aurora automatically drops any spatial indexes without SRIDs and prints warning messages in the database log. If you observe such warning messages, create new spatial indexes with SRIDs after the upgrade. For more information about changes to spatial functions and data types in MySQL 8.0, see Changes in MySQL 8.0 in the *MySQL Reference Manual*.

Database engine updates and fixes for Amazon Aurora MySQL

You can find the following information in the *Release notes for Amazon Aurora MySQL-Compatible Edition*:

- Database engine updates for Amazon Aurora MySQL version 8.4
- Database engine updates for Amazon Aurora MySQL version 3
- Database engine updates for Amazon Aurora MySQL version 2
- Database engine updates for Amazon Aurora MySQL version 1 (Deprecated)
- MySQL bugs fixed by Aurora MySQL database engine updates
- Security vulnerabilities fixed in Amazon Aurora MySQL

Working with Amazon Aurora PostgreSQL

Amazon Aurora PostgreSQL is a fully managed, PostgreSQL–compatible, and ACID–compliant relational database engine that combines the speed, reliability, and manageability of Amazon Aurora with the simplicity and cost-effectiveness of open-source databases. Aurora PostgreSQL is a drop-in replacement for PostgreSQL and makes it simple and cost-effective to set up, operate, and scale your new and existing PostgreSQL deployments, thus freeing you to focus on your business and applications. To learn more about Aurora in general, see What is Amazon Aurora?.

In addition to the benefits of Aurora, Aurora PostgreSQL offers a convenient migration pathway from Amazon RDS into Aurora, with push-button migration tools that convert your existing RDS for PostgreSQL applications to Aurora PostgreSQL. Routine database tasks such as provisioning, patching, backup, recovery, failure detection, and repair are also easy to manage with Aurora PostgreSQL.

Aurora PostgreSQL can work with many industry standards. For example, you can use Aurora PostgreSQL databases to build HIPAA-compliant applications and to store healthcare related information, including protected health information (PHI), under a completed Business Associate Agreement (BAA) with Amazon.

Aurora PostgreSQL is FedRAMP HIGH eligible. For details about Amazon and compliance efforts, see Amazon services in scope by compliance program.

Important

If you encounter an issue with your Aurora PostgreSQL DB cluster, your Amazon support agent might need more information about the health of your databases. The goal is to ensure that Amazon Support gets as much of the required information as possible in the shortest possible time.

You can use PG Collector to help gather valuable database information in a consolidated HTML file. For more information on PG Collector, how to run it, and how to download the HTML report, see PG Collector.

Upon successful completion, and unless otherwise noted, the script returns output in a readable HTML format. The script is designed to exclude any data or security details from the HTML that might compromise your business. It also makes no modifications to your database or its environment. However, if you find any information in the HTML that you are uncomfortable sharing, feel free to remove the problematic information before uploading

the HTML. When the HTML is acceptable, upload it using the attachments section in the case details of your support case.

For information about local write forwarding on Aurora PostgreSQL secondary DB clusters, see Local write forwarding in Aurora PostgreSQL.

Topics

- Working with the database preview environment
- Security with Amazon Aurora PostgreSQL
- Updating applications to connect to Aurora PostgreSQL DB clusters using new SSL/TLS certificates
- Using Kerberos authentication with Aurora PostgreSQL
- Migrating data to Amazon Aurora with PostgreSQL compatibility
- Optimizing query performance in Aurora PostgreSQL
- Working with unlogged tables in Aurora PostgreSQL
- Working with PostgreSQL autovacuum on Amazon Aurora PostgreSQL
- Managing TOAST OID contention in Amazon Aurora PostgreSQL
- Using Babelfish for Aurora PostgreSQL
- Performance and scaling for Amazon Aurora PostgreSQL
- Tuning with wait events for Aurora PostgreSQL
- Tuning Aurora PostgreSQL with Amazon DevOps Guru proactive insights
- Best practices with Amazon Aurora PostgreSQL
- Replication with Amazon Aurora PostgreSQL
- Local write forwarding in Aurora PostgreSQL
- Using Aurora PostgreSQL as a Knowledge Base for Amazon Bedrock
- Integrating Amazon Aurora PostgreSQL with other Amazon services
- Monitoring query execution plans and peak memory for Aurora PostgreSQL
- Managing query execution plans for Aurora PostgreSQL
- Working with extensions and foreign data wrappers
- Working with Trusted Language Extensions for PostgreSQL
- Amazon Aurora PostgreSQL reference

- Database engine updates for Amazon Aurora PostgreSQL

Working with the database preview environment

The PostgreSQL community releases new major version of PostgreSQL annually. Similarly, Amazon Aurora makes PostgreSQL major versions available as Preview releases. This allows you to create DB cluster using the Preview version and test out its features in the Database Preview Environment.

Aurora PostgreSQL DB clusters in the Database Preview Environment are functionally similar to other Aurora PostgreSQL DB clusters. However, you can't use a Preview version for production.

Keep in mind the following important limitations:

- All DB instances and DB clusters are deleted 60 days after you create them, along with any backups and snapshots.
- You can only create a DB instance in a virtual private cloud (VPC) based on the Amazon VPC service.
- You can't copy a snapshot of a DB instance to a production environment.

The following options are supported by the Preview.

- You can create DB instances using r5, r6g, r6i, r7g, r7i, r8g, x2g, t3, t4g, and db.serverless instance classes only. For more information about instance classes, see Amazon AuroraDB instance classes.
- You can use both single-AZ and multi-AZ deployments.
- You can use standard PostgreSQL dump and load functions to export databases from or import databases to the Database Preview Environment.

Unsupported features in the preview environment

The following features aren't available in the preview environment:

- Major version upgrades (MVU)
- No new minor versions will be released in preview region
- RDS for PostgreSQL to Aurora PostgreSQL inbound replication
- Amazon RDS Blue/Green deployment

- Cross-Region snapshot copy
- Aurora global database
- Database activity streams (DAS), RDS Proxy, and Amazon DMS
- Auto scaling read replicas
- Amazon Bedrock
- RDS export
- Performance Insights
- Custom endpoints
- Snapshot copy
- Zero-ETL
- Babelfish
- All extensions

PostgreSQL version 17 in the Database Preview environment

> **Important**
>
> This is preview documentation for Aurora PostgreSQL version 17. It is subject to change.

PostgreSQL version 17.0 is now available in the Amazon RDS Database Preview environment. PostgreSQL version 17 contains several improvements that are described in the following PostgreSQL documentation:

- PostgreSQL 17 Released

For information on the Database Preview Environment, see Working with the database preview environment. To access the Preview Environment from the console, select https://console.amazonaws.cn/rds-preview/.

Security with Amazon Aurora PostgreSQL

For a general overview of Aurora security, see Security in Amazon Aurora. You can manage security for Amazon Aurora PostgreSQL at a few different levels:

- To control who can perform Amazon RDS management actions on Aurora PostgreSQL DB clusters and DB instances, use Amazon Identity and Access Management (IAM). IAM handles the authentication of user identity before the user can access the service. It also handles authorization, that is, whether the user is allowed to do what they're trying to do. IAM database authentication is an additional authentication method that you can choose when you create your Aurora PostgreSQL DB cluster. For more information, see Identity and access management for Amazon Aurora.

  If you do use IAM with your Aurora PostgreSQL DB cluster, sign in to the Amazon Web Services Management Console with your IAM credentials first, before opening the Amazon RDS console at https://console.amazonaws.cn/rds/.

- Make sure to create Aurora DB clusters in a virtual private cloud (VPC) based on the Amazon VPC service. To control which devices and Amazon EC2 instances can open connections to the endpoint and port of the DB instance for Aurora DB clusters in a VPC, use a VPC security group. You can make these endpoint and port connections by using Secure Sockets Layer (SSL). In addition, firewall rules at your company can control whether devices running at your company can open connections to a DB instance. For more information on VPCs, see Amazon VPC and Amazon Aurora.

  The supported VPC tenancy depends on the DB instance class used by your Aurora PostgreSQL DB clusters. With `default` VPC tenancy, the DB cluster runs on shared hardware. With `dedicated` VPC tenancy, the DB cluster runs on a dedicated hardware instance. The burstable performance DB instance classes support default VPC tenancy only. The burstable performance DB instance classes include the db.t3 and db.t4g DB instance classes. All other Aurora PostgreSQL DB instance classes support both default and dedicated VPC tenancy.

  For more information about instance classes, see Amazon AuroraDB instance classes. For more information about `default` and `dedicated` VPC tenancy, see Dedicated instances in the *Amazon Elastic Compute Cloud User Guide*.

- To grant permissions to the PostgreSQL databases running on your Amazon Aurora DB cluster, you can take the same general approach as with stand-alone instances of PostgreSQL. Commands such as `CREATE ROLE`, `ALTER ROLE`, `GRANT`, and `REVOKE` work just as they do in on-premises databases, as does directly modifying databases, schemas, and tables.

  PostgreSQL manages privileges by using *roles*. The `rds_superuser` role is the most privileged role on an Aurora PostgreSQL DB cluster. This role is created automatically, and it's granted to

the user that creates the DB cluster (the master user account, `postgres` by default). To learn more, see Understanding PostgreSQL roles and permissions.

All available Aurora PostgreSQL versions, including versions 10, 11, 12, 13, 14, and higher releases support the Salted Challenge Response Authentication Mechanism (SCRAM) for passwords as an alternative to message digest (MD5). We recommend that you use SCRAM because it's more secure than MD5. For more information, including how to migrate database user passwords from MD5 to SCRAM, see Using SCRAM for PostgreSQL password encryption.

Understanding PostgreSQL roles and permissions

When you create an Aurora PostgreSQL DB cluster using the Amazon Web Services Management Console, an administrator account is created at the same time. By default, its name is `postgres`, as shown in the following screenshot:



You can choose another name rather than accept the default (`postgres`). If you do, the name you choose must start with a letter and be between 1 and 16 alphanumeric characters. For simplicity's sake, we refer to this main user account by its default value (`postgres`) throughout this guide.

If you use the `create-db-cluster` Amazon CLI rather than the Amazon Web Services Management Console, you create the user name by passing it with the `master-username` parameter. For more information, see Step 2: Create an Aurora PostgreSQL DB cluster.

Whether you use the Amazon Web Services Management Console, the Amazon CLI, or the Amazon RDS API, and whether you use the default `postgres` name or choose a different name, this first database user account is a member of the `rds_superuser` group and has `rds_superuser` privileges.

Topics

- Understanding the rds_superuser role
- Controlling user access to the PostgreSQL database
- Delegating and controlling user password management
- Using SCRAM for PostgreSQL password encryption

Understanding the rds_superuser role

In PostgreSQL, a *role* can define a user, a group, or a set of specific permissions granted to a group or user for various objects in the database. PostgreSQL commands to `CREATE USER` and `CREATE GROUP` have been replaced by the more general, `CREATE ROLE` with specific properties to distinguish database users. A database user can be thought of as a role with the LOGIN privilege.

> **Note**
>
> The `CREATE USER` and `CREATE GROUP` commands can still be used. For more information, see Database Roles in the PostgreSQL documentation.

The `postgres` user is the most highly privileged database user on your Aurora PostgreSQL DB cluster. It has the characteristics defined by the following `CREATE ROLE` statement.

```
CREATE ROLE postgres WITH LOGIN NOSUPERUSER INHERIT CREATEDB CREATEROLE NOREPLICATION
 VALID UNTIL 'infinity'
```

The properties `NOSUPERUSER`, `NOREPLICATION`, `INHERIT`, and `VALID UNTIL 'infinity'` are the default options for CREATE ROLE, unless otherwise specified.

By default, `postgres` has privileges granted to the `rds_superuser` role, and permissions to create roles and databases. The `rds_superuser` role allows the `postgres` user to do the following:

- Add extensions that are available for use with Aurora PostgreSQL. For more information, see Working with extensions and foreign data wrappers.
- Create roles for users and grant privileges to users. For more information, see CREATE ROLE and GRANT in the PostgreSQL documentation.

- Create databases. For more information, see CREATE DATABASE in the PostgreSQL documentation.
- Grant `rds_superuser` privileges to user roles that don't have these privileges, and revoke privileges as needed. We recommend that you grant this role only to those users who perform superuser tasks. In other words, you can grant this role to database administrators (DBAs) or system administrators.
- Grant (and revoke) the `rds_replication` role to database users that don't have the `rds_superuser` role.
- Grant (and revoke) the `rds_password` role to database users that don't have the `rds_superuser` role.
- Obtain status information about all database connections by using the `pg_stat_activity` view. When needed, `rds_superuser` can stop any connections by using `pg_terminate_backend` or `pg_cancel_backend`.

In the `CREATE ROLE postgres...` statement, you can see that the `postgres` user role specifically disallows PostgreSQL `superuser` permissions. Aurora PostgreSQL is a managed service, so you can't access the host OS, and you can't connect using the PostgreSQL `superuser` account. Many of the tasks that require `superuser` access on a stand-alone PostgreSQL are managed automatically by Aurora.

For more information about granting privileges, see GRANT in the PostgreSQL documentation.

The `rds_superuser` role is one of several *predefined* roles in an Aurora PostgreSQL DB cluster.

> **Note**
>
> In PostgreSQL 13 and earlier releases, *predefined* roles are known as *default* roles.

In the following list, you find some of the other predefined roles that are created automatically for a new Aurora PostgreSQL DB cluster. Predefined roles and their privileges can't be changed. You can't drop, rename, or modify privileges for these predefined roles. Attempting to do so results in an error.

- **rds_password** – A role that can change passwords and set up password constraints for database users. The `rds_superuser` role is granted with this role by default, and can grant the role to database users. For more information, see Controlling user access to the PostgreSQL database.

- For RDS for PostgreSQL versions older than 14, `rds_password` role can change passwords and set up password constraints for database users and users with `rds_superuser` role. From RDS for PostgreSQL version 14 and later, `rds_password` role can change passwords and set up password constraints only for database users. Only users with `rds_superuser` role can perform these actions on other users with `rds_superuser` role.
- **rdsadmin** – A role that's created to handle many of the management tasks that the administrator with `superuser` privileges would perform on a standalone PostgreSQL database. This role is used internally by Aurora PostgreSQL for many management tasks.

Viewing roles and their privileges

You can view predefined roles and their privileges in your RDS for PostgreSQL DB instance using different commands depending on your PostgreSQL version. To see all predefined roles, you can connect to your RDS for PostgreSQL DB instance and run following commands using the `psql`.

For `psql` 15 and earlier versions

Connect to your RDS for PostgreSQL DB instance and use the \du command in psql:

```
postgres=> \du
                                                          List of roles
    Role name    |                         Attributes                          |
                 Member of
-----------------+-----------------------------------------------------------
+-----------------------------------------------------
 postgres        | Create role, Create DB                                      +|
 {rds_superuser}
                 | Password valid until infinity                               |
 rds_ad          | Cannot login                                                | {}
 rds_iam         | Cannot login                                                | {}
 rds_password    | Cannot login                                                | {}
 rds_replication | Cannot login                                                | {}
 rds_superuser   | Cannot login                                                |
 {pg_monitor,pg_signal_backend,rds_password,rds_replication}
 rdsadmin        | Superuser, Create role, Create DB, Replication, Bypass RLS+| {}
                 | Password valid until infinity                               |
```

For `psql` 16 and later versions

```
postgres=> \drg+
```

```
                            List of role grants
   Role name   |           Member of           |       Options       | Grantor
---------------+-------------------------------+---------------------+----------
 postgres      | rds_superuser                 | INHERIT, SET        | rdsadmin
 rds_superuser | pg_checkpoint                 | ADMIN, INHERIT, SET | rdsadmin
 rds_superuser | pg_monitor                    | ADMIN, INHERIT, SET | rdsadmin
 rds_superuser | pg_signal_backend             | ADMIN, INHERIT, SET | rdsadmin
 rds_superuser | pg_use_reserved_connections | ADMIN, INHERIT, SET | rdsadmin
 rds_superuser | rds_password                  | ADMIN, INHERIT, SET | rdsadmin
 rds_superuser | rds_replication               | ADMIN, INHERIT, SET | rdsadmin
```

To check role membership without version dependency, you can use the following SQL query:

```
SELECT m.rolname AS "Role name", r.rolname AS "Member of"
FROM pg_catalog.pg_roles m
JOIN pg_catalog.pg_auth_members pam ON (pam.member = m.oid)
LEFT JOIN pg_catalog.pg_roles r ON (pam.roleid = r.oid)
LEFT JOIN pg_catalog.pg_roles g ON (pam.grantor = g.oid)
WHERE m.rolname !~ '^pg_'
ORDER BY 1, 2;
```

In the output, you can see that `rds_superuser` isn't a database user role (it can't login), but it has the privileges of many other roles. You can also see that database user `postgres` is a member of the `rds_superuser` role. As mentioned previously, `postgres` is the default value in the Amazon RDS console's **Create database** page. If you chose another name, that name is shown in the list of roles instead.

> **Note**
>
> Aurora PostgreSQL versions 15.2 and 14.7 introduced restrictive behavior of the `rds_superuser` role. An Aurora PostgreSQL user needs to be granted the `CONNECT` privilege on the corresponding database to connect even if the user is granted the `rds_superuser` role. Prior to Aurora PostgreSQL versions 14.7 and 15.2, a user was able to connect to any database and system table if the user was granted the `rds_superuser` role. This restrictive behavior aligns with the Amazon and Amazon Aurora commitments to the continuous improvement of security.
> Please update the respective logic in your applications if the above enhancement has an impact.

Controlling user access to the PostgreSQL database

New databases in PostgreSQL are always created with a default set of privileges in the database's `public` schema that allow all database users and roles to create objects. These privileges allow database users to connect to the database, for example, and create temporary tables while connected.

To better control user access to the databases instances that you create on your Aurora PostgreSQL DB cluster primary node , we recommend that you revoke these default `public` privileges. After doing so, you then grant specific privileges for database users on a more granular basis, as shown in the following procedure.

To set up roles and privileges for a new database instance

Suppose you're setting up a database on a newly created Aurora PostgreSQL DB cluster for use by several researchers, all of whom need read-write access to the database.

1. Use `psql` (or pgAdmin) to connect to the primary DB instance on your Aurora PostgreSQL DB cluster:

   ```
   psql --host=your-cluster-instance-1.666666666666.aws-region.rds.amazonaws.com --
   port=5432 --username=postgres --password
   ```

   When prompted, enter your password. The `psql` client connects and displays the default administrative connection database, `postgres=>`, as the prompt.

2. To prevent database users from creating objects in the `public` schema, do the following:

   ```
   postgres=> REVOKE CREATE ON SCHEMA public FROM PUBLIC;
   REVOKE
   ```

3. Next, you create a new database instance:

   ```
   postgres=> CREATE DATABASE lab_db;
   CREATE DATABASE
   ```

4. Revoke all privileges from the `PUBLIC` schema on this new database.

   ```
   postgres=> REVOKE ALL ON DATABASE lab_db FROM public;
   REVOKE
   ```

5. Create a role for database users.

```
postgres=> CREATE ROLE lab_tech;
CREATE ROLE
```

6. Give database users that have this role the ability to connect to the database.

```
postgres=> GRANT CONNECT ON DATABASE lab_db TO lab_tech;
GRANT
```

7. Grant all users with the `lab_tech` role all privileges on this database.

```
postgres=> GRANT ALL PRIVILEGES ON DATABASE lab_db TO lab_tech;
GRANT
```

8. Create database users, as follows:

```
postgres=> CREATE ROLE lab_user1 LOGIN PASSWORD 'change_me';
CREATE ROLE
postgres=> CREATE ROLE lab_user2 LOGIN PASSWORD 'change_me';
CREATE ROLE
```

9. Grant these two users the privileges associated with the lab_tech role:

```
postgres=> GRANT lab_tech TO lab_user1;
GRANT ROLE
postgres=> GRANT lab_tech TO lab_user2;
GRANT ROLE
```

At this point, `lab_user1` and `lab_user2` can connect to the `lab_db` database. This example doesn't follow best practices for enterprise usage, which might include creating multiple database instances, different schemas, and granting limited permissions. For more complete information and additional scenarios, see Managing PostgreSQL Users and Roles.

For more information about privileges in PostgreSQL databases, see the GRANT command in the PostgreSQL documentation.

Delegating and controlling user password management

As a DBA, you might want to delegate the management of user passwords. Or, you might want to prevent database users from changing their passwords or reconfiguring password constraints, such

as password lifetime. To ensure that only the database users that you choose can change password settings, you can turn on the restricted password management feature. When you activate this feature, only those database users that have been granted the `rds_password` role can manage passwords.

> **Note**
>
> To use restricted password management, your Aurora PostgreSQL DB cluster must be running Amazon Aurora PostgreSQL 10.6 or higher.

By default, this feature is `off`, as shown in the following:

```
postgres=> SHOW rds.restrict_password_commands;
  rds.restrict_password_commands
--------------------------------
 off
(1 row)
```

To turn on this feature, you use a custom parameter group and change the setting for `rds.restrict_password_commands` to 1. Be sure to reboot your Aurora PostgreSQL's primary DB instance so that the setting takes effect.

With this feature active, `rds_password` privileges are needed for the following SQL commands:

```
CREATE ROLE myrole WITH PASSWORD 'mypassword';
CREATE ROLE myrole WITH PASSWORD 'mypassword' VALID UNTIL '2023-01-01';
ALTER ROLE myrole WITH PASSWORD 'mypassword' VALID UNTIL '2023-01-01';
ALTER ROLE myrole WITH PASSWORD 'mypassword';
ALTER ROLE myrole VALID UNTIL '2023-01-01';
ALTER ROLE myrole RENAME TO myrole2;
```

Renaming a role (`ALTER ROLE myrole RENAME TO newname`) is also restricted if the password uses the MD5 hashing algorithm.

With this feature active, attempting any of these SQL commands without the `rds_password` role permissions generates the following error:

```
ERROR: must be a member of rds_password to alter passwords
```

We recommend that you grant the `rds_password` to only a few roles that you use solely for password management. If you grant `rds_password` privileges to database users that don't have `rds_superuser` privileges, you need to also grant them the `CREATEROLE` attribute.

Make sure that you verify password requirements such as expiration and needed complexity on the client side. If you use your own client-side utility for password related changes, the utility needs to be a member of `rds_password` and have `CREATE ROLE` privileges.

Using SCRAM for PostgreSQL password encryption

The *Salted Challenge Response Authentication Mechanism (SCRAM)* is an alternative to PostgreSQL's default message digest (MD5) algorithm for encrypting passwords. The SCRAM authentication mechanism is considered more secure than MD5. To learn more about these two different approaches to securing passwords, see Password Authentication in the PostgreSQL documentation.

We recommend that you use SCRAM rather than MD5 as the password encryption scheme for your Aurora PostgreSQL DB cluster. SCRAM is supported in Aurora PostgreSQL version 10 and all higher major and minor versions. It's a cryptographic challenge-response mechanism that uses the scram-sha-256 algorithm for password authentication and encryption.

You might need to update libraries for your client applications to support SCRAM. For example, JDBC versions before 42.2.0 don't support SCRAM. For more information, see PostgreSQL JDBC Driver in the PostgreSQL JDBC Driver documentation. For a list of other PostgreSQL drivers and SCRAM support, see List of drivers in the PostgreSQL documentation.

Aurora PostgreSQL version 14 and higher support scram-sha-256 for password encryption by default for new DB clusters. For these versions, the default DB cluster parameter group (`default.aurora-postgresql14`) has its `password_encryption` value set to scram-sha-256. SCRAM isn't supported for Aurora Serverless v1.

Setting up Aurora PostgreSQL DB cluster to require SCRAM

For Aurora PostgreSQL 14.3 and higher versions, you can require the Aurora PostgreSQL DB cluster to accept only passwords that use the scram-sha-256 algorithm.

> **Important**
>
> For existing RDS Proxies with PostgreSQL databases, if you modify the database authentication to use `SCRAM` only, the proxy becomes unavailable for up to 60 seconds. To avoid the issue, do one of the following:

- Ensure that the database allows both SCRAM and MD5 authentication.
- To use only SCRAM authentication, create a new proxy, migrate your application traffic to the new proxy, then delete the proxy previously associated with the database.

Before making changes to your system, be sure you understand the complete process, as follows:

- Get information about all roles and password encryption for all database users.
- Double-check the parameter settings for your Aurora PostgreSQL DB cluster for the parameters that control password encryption.
- If your Aurora PostgreSQL DB cluster uses a default parameter group, you need to create a custom DB cluster parameter group and apply it to your Aurora PostgreSQL DB cluster so that you can modify parameters when needed. If your Aurora PostgreSQL DB cluster uses a custom parameter group, you can modify the necessary parameters later in the process, as needed.
- Change the `password_encryption` parameter to `scram-sha-256`.
- Notify all database users that they need to update their passwords. Do the same for your `postgres` account. The new passwords are encrypted and stored using the scram-sha-256 algorithm.
- Verify that all passwords are encrypted using as the type of encryption.
- If all passwords use scram-sha-256, you can change the `rds.accepted_password_auth_method` parameter from `md5+scram` to `scram-sha-256`.

Warning

After you change `rds.accepted_password_auth_method` to scram-sha-256 alone, any users (roles) with `md5`–encrypted passwords can't connect.

Getting ready to require SCRAM for your Aurora PostgreSQL DB cluster

Before making any changes to your Aurora PostgreSQL DB cluster, check all existing database user accounts. Also, check the type of encryption used for passwords. You can do these tasks by using the `rds_tools` extension. To see which PostgreSQL versions support `rds_tools`, see Extension versions for Amazon RDS for PostgreSQL.

To get a list of database users (roles) and password encryption methods

1. Use `psql` to connect to the primary instance of your Aurora PostgreSQL DB cluster , as shown in the following.

```
psql --host=cluster-name-instance-1.111122223333.aws-region.rds.amazonaws.com --
port=5432 --username=postgres --password
```

2. Install the `rds_tools` extension.

```
postgres=> CREATE EXTENSION rds_tools;
CREATE EXTENSION
```

3. Get a listing of roles and encryption.

```
postgres=> SELECT * FROM
      rds_tools.role_password_encryption_type();
```

You see output similar to the following.

```
       rolname        | encryption_type
----------------------+-----------------
 pg_monitor           |
 pg_read_all_settings |
 pg_read_all_stats    |
 pg_stat_scan_tables  |
 pg_signal_backend    |
 lab_tester           | md5
 user_465             | md5
 postgres             | md5
(8 rows)
```

Creating a custom DB cluster parameter group

> **Note**
>
> If your Aurora PostgreSQL DB cluster already uses a custom parameter group, you don't need to create a new one.

For an overview of parameter groups for Aurora, see Creating a DB cluster parameter groupin Amazon Aurora.

The password encryption type used for passwords is set in one parameter, `password_encryption`. The encryption that the Aurora PostgreSQL DB cluster allows is set in another parameter, `rds.accepted_password_auth_method`. Changing either of these from the default values requires that you create a custom DB cluster parameter group and apply it to your cluster.

You can also use the Amazon Web Services Management Console or the RDS API to create a custom DB cluster parameter group . For more information, see Creating a DB cluster parameter groupin Amazon Aurora.

You can now associate the custom parameter group with your DB instance.

To create a custom DB cluster parameter group

1. Use the `create-db-cluster-parameter-group` CLI command to create the custom parameter group for the cluster. The following example uses `aurora-postgresql13` as the source for this custom parameter group.

   For Linux, macOS, or Unix:

   ```
   aws rds create-db-cluster-parameter-group --db-cluster-parameter-group-name 'docs-lab-scram-passwords' \
     --db-parameter-group-family aurora-postgresql13  --description 'Custom DB cluster parameter group for SCRAM'
   ```

   For Windows:

   ```
   aws rds create-db-cluster-parameter-group --db-cluster-parameter-group-name "docs-lab-scram-passwords" ^
     --db-parameter-group-family aurora-postgresql13  --description "Custom DB cluster parameter group for SCRAM"
   ```

   You can now associate the custom parameter group with your cluster.

2. Use the `modify-db-cluster` CLI command to apply this custom parameter group to your Aurora PostgreSQL DB cluster.

   For Linux, macOS, or Unix:

```
aws rds modify-db-cluster --db-cluster-identifier 'your-instance-name' \
        --db-cluster-parameter-group-name "docs-lab-scram-passwords
```

For Windows:

```
aws rds modify-db-cluster --db-cluster-identifier "your-instance-name" ^
        --db-cluster-parameter-group-name "docs-lab-scram-passwords
```


To resynchronize your Aurora PostgreSQL DB cluster with your custom DB cluster parameter group, reboot the primary and all other instances of the cluster.

Configuring password encryption to use SCRAM

The password encryption mechanism used by an Aurora PostgreSQL DB cluster is set in the DB cluster parameter group in the `password_encryption` parameter. Allowed values are unset, `md5`, or `scram-sha-256`. The default value depends on the Aurora PostgreSQL version, as follows:

- Aurora PostgreSQL 14 – Default is `scram-sha-256`
- Aurora PostgreSQL 13 – Default is `md5`

With a custom DB cluster parameter group attached to your Aurora PostgreSQL DB cluster, you can modify values for the password encryption parameter.

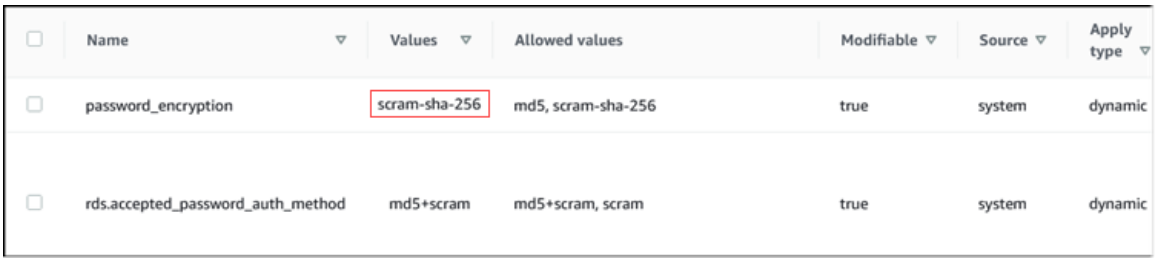

Name	Values	Allowed values	Modifiable	Source	Apply type
password_encryption	scram-sha-256	md5, scram-sha-256	true	system	dynamic
rds.accepted_password_auth_method	md5+scram	md5+scram, scram	true	system	dynamic

To change password encryption setting to scram-sha-256

- Change the value of the password encryption to scram-sha-256, as shown following. The change can be applied immediately because the parameter is dynamic, so a restart isn't required for the change to take effect.

  For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group --db-cluster-parameter-group-name \
  'docs-lab-scram-passwords' --parameters
 'ParameterName=password_encryption,ParameterValue=scram-
sha-256,ApplyMethod=immediate'
```

For Windows:

```
aws rds modify-db-parameter-group --db-parameter-group-name ^
  "docs-lab-scram-passwords" --parameters
 "ParameterName=password_encryption,ParameterValue=scram-
sha-256,ApplyMethod=immediate"
```

Migrating passwords for user roles to SCRAM

You can migrate passwords for user roles to SCRAM as described following.

To migrate database user (role) passwords from MD5 to SCRAM

1. Log in as the administrator user (default user name, `postgres`) as shown following.

```
psql --host=cluster-name-instance-1.111122223333.aws-region.rds.amazonaws.com --
port=5432 --username=postgres --password
```

2. Check the setting of the `password_encryption` parameter on your RDS for PostgreSQL DB instance by using the following command.

```
postgres=> SHOW password_encryption;
 password_encryption
---------------------
 md5
 (1 row)
```

3. Change the value of this parameter to scram-sha-256. For more information, see Configuring password encryption to use SCRAM.
4. Check the value again to make sure that it's now set to `scram-sha-256`, as follows.

```
postgres=> SHOW password_encryption;
 password_encryption
---------------------
```

```
 scram-sha-256
 (1 row)
```

5. Notify all database users to change their passwords. Be sure to also change your own password for account `postgres` (the database user with `rds_superuser` privileges).


```
labdb=> ALTER ROLE postgres WITH LOGIN PASSWORD 'change_me';
ALTER ROLE
```

6. Repeat the process for all databases on your Aurora PostgreSQL DB cluster.

Changing parameter to require SCRAM

This is the final step in the process. After you make the change in the following procedure, any user accounts (roles) that still use `md5` encryption for passwords can't log in to the Aurora PostgreSQL DB cluster.

The `rds.accepted_password_auth_method` specifies the encryption method that the Aurora PostgreSQL DB cluster accepts for a user password during the login process. The default value is `md5+scram`, meaning that either method is accepted. In the following image, you can find the default setting for this parameter.

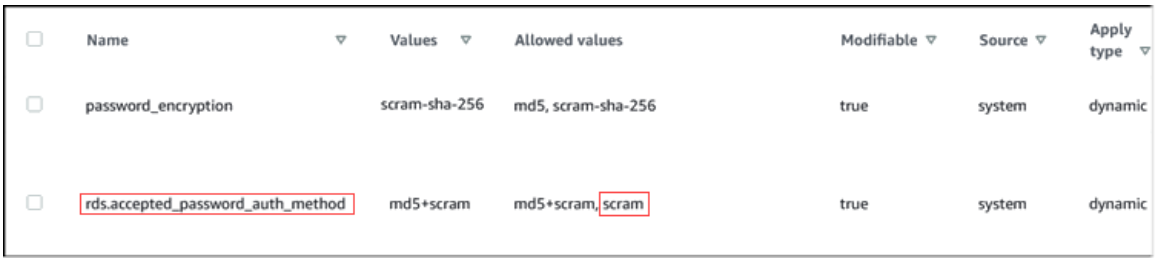

Name	Values	Allowed values	Modifiable	Source	Apply type
password_encryption	scram-sha-256	md5, scram-sha-256	true	system	dynamic
rds.accepted_password_auth_method	md5+scram	md5+scram, scram	true	system	dynamic

The allowed values for this parameter are `md5+scram` or `scram` alone. Changing this parameter value to `scram` makes this a requirement.

To change the parameter value to require SCRAM authentication for passwords

1. Verify that all database user passwords for all databases on your Aurora PostgreSQL DB cluster use `scram-sha-256` for password encryption. To do so, query `rds_tools` for the role (user) and encryption type, as follows.

```
postgres=> SELECT * FROM rds_tools.role_password_encryption_type();
  rolname        | encryption_type
  ---------------------+----------------
```

```
  pg_monitor           |
  pg_read_all_settings |
  pg_read_all_stats    |
  pg_stat_scan_tables  |
  pg_signal_backend    |
  lab_tester           | scram-sha-256
  user_465             | scram-sha-256
  postgres             | scram-sha-256
  ( rows)
```

2. Repeat the query across all DB instances in your Aurora PostgreSQL DB cluster.

   If all passwords use scram-sha-256, you can proceed.

3. Change the value of the accepted password authentication to scram-sha-256, as follows.

   For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group --db-cluster-parameter-group-name 'docs-
lab-scram-passwords' \
  --parameters
 'ParameterName=rds.accepted_password_auth_method,ParameterValue=scram,ApplyMethod=immediat
```

   For Windows:

```
aws rds modify-db-cluster-parameter-group --db-cluster-parameter-group-name "docs-
lab-scram-passwords" ^
  --parameters
 "ParameterName=rds.accepted_password_auth_method,ParameterValue=scram,ApplyMethod=immediat
```

Securing Aurora PostgreSQL data with SSL/TLS

Amazon RDS supports Secure Socket Layer (SSL) and Transport Layer Security (TLS) encryption for Aurora PostgreSQL DB clusters. Using SSL/TLS, you can encrypt a connection between your applications and your Aurora PostgreSQL DB clusters. You can also force all connections to your Aurora PostgreSQL DB cluster to use SSL/TLS. Amazon Aurora PostgreSQL supports Transport Layer Security (TLS) versions 1.1 and 1.2. We recommend using TLS 1.2 for encrypted connections. We have added support for TLSv1.3 from the following versions of Aurora PostgreSQL:

- 15.3 and all higher versions

- 14.8 and higher 14 versions
- 13.11 and higher 13 versions
- 12.15 and higher 12 versions
- 11.20 and higher 11 versions

For general information about SSL/TLS support and PostgreSQL databases, see SSL support in the PostgreSQL documentation. For information about using an SSL/TLS connection over JDBC, see Configuring the client in the PostgreSQL documentation.

Topics

- Requiring an SSL/TLS connection to an Aurora PostgreSQL DB cluster
- Determining the SSL/TLS connection status
- Configuring cipher suites for connections to Aurora PostgreSQL DB clusters
- TLS key-exchange groups in Aurora PostgreSQL

SSL/TLS support is available in all Amazon Regions for Aurora PostgreSQL. Amazon RDS creates an SSL/TLS certificate for your Aurora PostgreSQL DB cluster when the DB cluster is created. If you enable SSL/TLS certificate verification, then the SSL/TLS certificate includes the DB cluster endpoint as the Common Name (CN) for the SSL/TLS certificate to guard against spoofing attacks.

To connect to an Aurora PostgreSQL DB cluster over SSL/TLS

1. Download the certificate.

   For information about downloading certificates, see Using SSL/TLS to encrypt a connection to a DB cluster.
2. Import the certificate into your operating system.
3. Connect to your Aurora PostgreSQL DB cluster over SSL/TLS.

   When you connect using SSL/TLS, your client can choose to verify the certificate chain or not. If your connection parameters specify `sslmode=verify-ca` or `sslmode=verify-full`, then your client requires the RDS CA certificates to be in their trust store or referenced in the connection URL. This requirement is to verify the certificate chain that signs your database certificate.

When a client, such as psql or JDBC, is configured with SSL/TLS support, the client first tries to connect to the database with SSL/TLS by default. If the client can't connect with SSL/TLS, it reverts to connecting without SSL/TLS. By default, the `sslmode` option for JDBC and libpq-based clients is set to `prefer`.

Use the `sslrootcert` parameter to reference the certificate, for example `sslrootcert=rds-ssl-ca-cert.pem`.

The following is an example of using psql to connect to an Aurora PostgreSQL DB cluster.

```
$ psql -h testpg.cdhmuqifdpib.us-east-1.rds.amazonaws.com -p 5432 \
    "dbname=testpg user=testuser sslrootcert=rds-ca-2015-root.pem sslmode=verify-full"
```

Requiring an SSL/TLS connection to an Aurora PostgreSQL DB cluster

To require SSL/TLS connections to your Aurora PostgreSQL DB cluster, use `rds.force_ssl` parameter.

- To require SSL/TLS connections, set the `rds.force_ssl` parameter value to 1 (on).
- To turn off required SSL/TLS connections, set the `rds.force_ssl` parameter value to 0 (off).

The default value of this parameter depends on the Aurora PostgreSQL version:

- For Aurora PostgreSQL versions 17 and later: The default value is 1 (on).
- For Aurora PostgreSQL versions 16 and older: The default value is 0 (off).

> **Note**
>
> When you perform a major version upgrade from Aurora PostgreSQL version 16 or earlier to version 17 or later, the default value of the parameter changes from 0 (off) to 1 (on). This change may cause connectivity failures for applications that are not configured for SSL. You can revert to the previous default behavior by setting this parameter to 0 (off).

For more information on handling parameters, see Parameter groups for Amazon Aurora.

Updating the `rds.force_ssl` parameter also sets the PostgreSQL `ssl` parameter to 1 (on) and modifies your DB cluster's `pg_hba.conf` file to support the new SSL/TLS configuration.

When the `rds.force_ssl` parameter is set to 1 for a DB cluster, you see output similar to the following when you connect, indicating that SSL/TLS is now required:

```
$ psql postgres -h SOMEHOST.amazonaws.com -p 8192 -U someuser
psql (9.3.12, server 9.4.4)
WARNING: psql major version 9.3, server major version 9.4.
Some psql features might not work.
SSL connection (cipher: DHE-RSA-AES256-SHA, bits: 256)
Type "help" for help.

postgres=>
```

Determining the SSL/TLS connection status

The encrypted status of your connection is shown in the logon banner when you connect to the DB cluster.

```
Password for user master:
psql (9.3.12)
SSL connection (cipher: DHE-RSA-AES256-SHA, bits: 256)
Type "help" for help.

postgres=>
```

You can also load the `sslinfo` extension and then call the `ssl_is_used()` function to determine if SSL/TLS is being used. The function returns `t` if the connection is using SSL/TLS, otherwise it returns `f`.

```
postgres=> create extension sslinfo;
CREATE EXTENSION

postgres=> select ssl_is_used();
 ssl_is_used
---------
t
```

```
(1 row)
```

You can use the `select ssl_cipher()` command to determine the SSL/TLS cipher:

```
postgres=> select ssl_cipher();
ssl_cipher
--------------------
DHE-RSA-AES256-SHA
(1 row)
```

If you enable `set rds.force_ssl` and restart your DB cluster, non-SSL connections are refused with the following message:

```
$ export PGSSLMODE=disable
$ psql postgres -h SOMEHOST.amazonaws.com -p 8192 -U someuser
psql: FATAL: no pg_hba.conf entry for host "host.ip", user "someuser", database
 "postgres", SSL off
$
```

For information about the `sslmode` option, see Database connection control functions in the PostgreSQL documentation.

Configuring cipher suites for connections to Aurora PostgreSQL DB clusters

By using configurable cipher suites, you can have more control over the security of your database connections. You can specify a list of cipher suites that you want to allow to secure client SSL/TLS connections to your database. With configurable cipher suites, you can control the connection encryption that your database server accepts. Doing this helps prevent the use of insecure or deprecated ciphers.

Configurable cipher suites is supported in Aurora PostgreSQL versions 11.8 and higher.

To specify the list of permissible ciphers for encrypting connections, modify the `ssl_ciphers` cluster parameter. Set the `ssl_ciphers` parameter to a string of comma-separated cipher values in a cluster parameter group using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API. To set cluster parameters, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

The following table shows the allowed ciphers for each Aurora PostgreSQL major version.

APG Major Version	Allowed Ciphers List
18	TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_256_CBC_SHA, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384, TLS_AES_128_GCM_SHA256, TLS_AES_256_GCM_SHA384
17	DHE-RSA-AES128-SHA, DHE-RSA-AES128-SHA256, DHE-RSA-AES128-GCM-SHA256, DHE-RSA-AES256-SHA, DHE-RSA-AES256-SHA256, DHE-RSA-AES256-GCM-SHA384, ECDHE-RSA-AES128-SHA, ECDHE-RSA-AES128-SHA256, ECDHE-RSA-AES128-GCM-SHA256, ECDHE-RSA-AES256-SHA, ECDHE-RSA-AES256-SHA384, ECDHE-RSA-AES256-GCM-SHA384, TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_256_CBC_SHA, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA, TLS_AES_128_GCM_SHA256, TLS_AES_256_GCM_SHA384, TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA, ECDHE-ECDSA-AES256-SHA, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384, ECDHE-ECDSA-AES256-GCM-SHA384
16	DHE-RSA-AES128-SHA, DHE-RSA-AES128-SHA256, DHE-RSA-AES128-GCM-SHA256, DHE-RSA-AES256-SHA, DHE-RSA-AES256-SHA256, DHE-RSA-AES256-GCM-SHA384, ECDHE-RSA-AES128-SHA, ECDHE-RSA-AES128-SHA256, ECDHE-RSA-AES128-GCM-SHA256, ECDHE-RSA-AES256-SHA, ECDHE-RSA-AES256-SHA384, ECDHE-RSA-AES256-GCM-SHA384, TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_256_CBC_SHA, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256,

APG Major Version	Allowed Ciphers List
	TLS_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_RSA_WITH_CHACHA20 _POLY1305_SHA256, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_128_ GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE _RSA_WITH_AES_128_CBC_SHA, TLS_AES_128_GCM_SHA256, TLS_AES_2 56_GCM_SHA384, TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA, ECDHE-ECD SA-AES256-SHA, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384, ECDHE- ECDSA-AES256-GCM-SHA384
15	DHE-RSA-AES128-SHA, DHE-RSA-AES128-SHA256, DHE-RSA-AES128-GCM -SHA256, DHE-RSA-AES256-SHA, DHE-RSA-AES256-SHA256, DHE-RSA- AES256-GCM-SHA384, ECDHE-RSA-AES128-SHA, ECDHE-RSA-AES128-S HA256, ECDHE-RSA-AES128-GCM-SHA256, ECDHE-RSA-AES256-SHA, ECDHE- RSA-AES256-SHA384, ECDHE-RSA-AES256-GCM-SHA384, TLS_RSA_W ITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_256_CBC_SHA, TLS_RSA_W ITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_RSA_WITH_CHACHA20 _POLY1305_SHA256, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_128_ GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE _RSA_WITH_AES_128_CBC_SHA, TLS_AES_128_GCM_SHA256, TLS_AES_2 56_GCM_SHA384, TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA, ECDHE-ECD SA-AES256-SHA, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384, ECDHE- ECDSA-AES256-GCM-SHA384

APG Major Version	Allowed Ciphers List
14	DHE-RSA-AES128-SHA, DHE-RSA-AES128-SHA256, DHE-RSA-AES128-GCM-SHA256, DHE-RSA-AES256-SHA, DHE-RSA-AES256-SHA256, DHE-RSA-AES256-GCM-SHA384, ECDHE-RSA-AES128-SHA, ECDHE-RSA-AES128-SHA256, ECDHE-RSA-AES128-GCM-SHA256, ECDHE-RSA-AES256-SHA, ECDHE-RSA-AES256-SHA384, ECDHE-RSA-AES256-GCM-SHA384, TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_256_CBC_SHA, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA, TLS_AES_128_GCM_SHA256, TLS_AES_256_GCM_SHA384, TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA, ECDHE-ECDSA-AES256-SHA, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384, ECDHE-ECDSA-AES256-GCM-SHA384
13	DHE-RSA-AES128-SHA, DHE-RSA-AES128-SHA256, DHE-RSA-AES128-GCM-SHA256, DHE-RSA-AES256-SHA, DHE-RSA-AES256-SHA256, DHE-RSA-AES256-GCM-SHA384, ECDHE-RSA-AES128-SHA, ECDHE-RSA-AES128-SHA256, ECDHE-RSA-AES128-GCM-SHA256, ECDHE-RSA-AES256-SHA, ECDHE-RSA-AES256-SHA384, ECDHE-RSA-AES256-GCM-SHA384, TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_256_CBC_SHA, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA, TLS_AES_128_GCM_SHA256, TLS_AES_256_GCM_SHA384, TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA, ECDHE-ECDSA-AES256-SHA, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384, ECDHE-ECDSA-AES256-GCM-SHA384

APG Major Version	Allowed Ciphers List
12	DHE-RSA-AES128-SHA, DHE-RSA-AES128-SHA256, DHE-RSA-AES128-GCM-SHA256, DHE-RSA-AES256-SHA, DHE-RSA-AES256-SHA256, DHE-RSA-AES256-GCM-SHA384, ECDHE-RSA-AES128-SHA, ECDHE-RSA-AES128-SHA256, ECDHE-RSA-AES128-GCM-SHA256, ECDHE-RSA-AES256-SHA, ECDHE-RSA-AES256-SHA384, ECDHE-RSA-AES256-GCM-SHA384, TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_256_CBC_SHA, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA, TLS_AES_128_GCM_SHA256, TLS_AES_256_GCM_SHA384, TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA, ECDHE-ECDSA-AES256-SHA, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384, ECDHE-ECDSA-AES256-GCM-SHA384
11	DHE-RSA-AES128-SHA, DHE-RSA-AES128-SHA256, DHE-RSA-AES128-GCM-SHA256, DHE-RSA-AES256-SHA, DHE-RSA-AES256-SHA256, DHE-RSA-AES256-GCM-SHA384, ECDHE-RSA-AES128-SHA, ECDHE-RSA-AES128-SHA256, ECDHE-RSA-AES128-GCM-SHA256, ECDHE-RSA-AES256-SHA, ECDHE-RSA-AES256-SHA384, ECDHE-RSA-AES256-GCM-SHA384, TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_256_CBC_SHA, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA, TLS_AES_128_GCM_SHA256, TLS_AES_256_GCM_SHA384, TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA, ECDHE-ECDSA-AES256-SHA, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384, ECDHE-ECDSA-AES256-GCM-SHA384

You can also use the describe-engine-default-cluster-parameters CLI command to determine which cipher suites are currently supported for a specific parameter group family. The following example shows how to get the allowed values for the `ssl_cipher` cluster parameter for Aurora PostgreSQL 11.

```
aws rds describe-engine-default-cluster-parameters --db-parameter-group-family aurora-
postgresql11

    ...some output truncated...
 {
  "ParameterName": "ssl_ciphers",
  "Description": "Sets the list of allowed TLS ciphers to be used on secure
 connections.",
  "Source": "engine-default",
  "ApplyType": "dynamic",
  "DataType": "list",
  "AllowedValues": "DHE-RSA-AES128-SHA,DHE-RSA-AES128-SHA256,DHE-RSA-AES128-GCM-
SHA256,DHE-RSA-AES256-SHA,DHE-RSA-AES256-SHA256,DHE-RSA-AES256-GCM-SHA384,
  ECDHE-RSA-AES128-SHA,ECDHE-RSA-AES128-SHA256,ECDHE-RSA-AES128-GCM-
SHA256,ECDHE-RSA-AES256-SHA,ECDHE-RSA-AES256-SHA384,ECDHE-RSA-AES256-GCM-
SHA384,TLS_RSA_WITH_AES_256_GCM_SHA384,

 TLS_RSA_WITH_AES_256_CBC_SHA,TLS_RSA_WITH_AES_128_GCM_SHA256,TLS_RSA_WITH_AES_128_CBC_SHA256,T

 TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384,TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA,TLS_ECDHE_RSA_WITH_AE
  "IsModifiable": true,
  "MinimumEngineVersion": "11.8",
  "SupportedEngineModes": [
   "provisioned"
  ]
 },
    ...some output truncated...
```

The `ssl_ciphers` parameter defaults to all allowed TLS 1.2 cipher suites. For more information about ciphers, see the ssl_ciphers variable in the PostgreSQL documentation.

From Aurora PostgreSQL 18.3 onwards, two parameters control which cipher suites the server offers during the TLS handshake. The two parameters are independent and complementary – `ssl_ciphers` controls TLS 1.2 version ciphers, and `ssl_tls13_ciphers` controls TLS 1.3 version ciphers.

Parameter	TLS protocol scope	Modifiable	Available in	Allowed Values	Default values
ssl_ciphers	TLS 1.2	Yes	All current Aurora PostgreSQL versions	TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_256_CBC_SHA, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA, TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384	TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384
ssl_tls13_ciphers	TLS 1.3	Yes	Aurora PostgreSQL 18.3 and later	TLS_AES_128_GCM_SHA256, TLS_AES_256_GCM_SHA384	TLS_AES_128_GCM_SHA256, TLS_AES_256_GCM_SHA384

Upgrading from earlier Aurora PostgreSQL versions

Starting with Aurora PostgreSQL 18.3, TLS 1.3 ciphers are no longer controlled by the `ssl_ciphers` parameter. If you upgrade from an earlier version and your custom DB cluster parameter group set `ssl_ciphers` with the intent of restricting TLS 1.3 ciphers, those entries no longer take effect against TLS 1.3 connections after the upgrade. To control the TLS 1.3 cipher list, set `ssl_tls13_ciphers` in your custom DB cluster parameter group.

TLS key-exchange groups in Aurora PostgreSQL

The `ssl_groups` parameter specifies the named groups to use for TLS key exchange. For more information, see the ssl_groups in the PostgreSQL documentation.

In Aurora PostgreSQL 18 and later, you can modify the `ssl_groups` cluster parameter to use specific values from the allowlisted groups. This is a dynamic parameter that doesn't require a reboot.

The following table lists the default and allowlisted custom `ssl_groups` values by engine major version.

PostgreSQL engine version	Default `ssl_groups` values	Allowlisted custom `ssl_groups` values

18	`prime256v1:X25519`	`X25519MLKEM768`
		`SecP256r1MLKEM768`
		`X25519`
		`prime256v1`
		`secp384r1`

When you configure `ssl_groups`, keep the following behavior in mind:

- The order of the list sets the server preference. The first group in the list that the client also supports is used for a connection.
- `ssl_groups` applies only to key exchange that uses named groups. For example, `ssl_groups` is ignored by TLS v1.2 cipher suites that use RSA key exchange. To use only the specified groups,

make sure that `rds.force_ssl` is enabled. Then either set `ssl_min_protocol_version` to `TLSv1.3`, or restrict `ssl_ciphers` to ECDHE-based suites for TLS v1.2-based connections.

ML-KEM groups require TLS v1.3. To enforce that they are used, set `ssl_min_protocol_version` to `TLSv1.3`.

For more information about modifying parameters and parameter groups, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

Using dynamic masking with Aurora PostgreSQL

Dynamic data masking is a security feature that protects sensitive data in Aurora PostgreSQL databases by controlling how data appears to users at query time. Aurora implements it through the `pg_columnmask` extension. `pg_columnmask` provides column-level data protection that complements PostgreSQL's native row-level security and granular access control mechanisms.

With `pg_columnmask`, you create masking policies that determine data visibility based on user roles. When users query tables with masking policies, Aurora PostgreSQL applies the appropriate masking function at query time based on the user's role and policy weight. The underlying data remains unchanged in storage.

`pg_columnmask` supports the following capabilities:

- **Built-in and custom masking functions** – Use pre-built functions for common patterns like email and text masking, or create your own custom functions to protects sensitive data (PII) through SQL-based masking policies.
- **Multiple masking strategies** – Completely hide information, replace partial values with wildcards, or define custom masking approaches.
- **Policy prioritization** – Define multiple policies for a single column. Use weights to determine which masking policy should be used when multiple policies apply to a column. Aurora PostgreSQL applies policies based on weight and user role membership.

`pg_columnmask` is available on Aurora PostgreSQL version 16.10 and higher, and version 17.6 and higher. It is available at no additional cost.

Getting started with dynamic masking

To dynamically mask data, you install the `pg_columnmask` extension in your database and create masking policies for your tables. The setup process involves prerequisite verification, extension installation, role configuration, policy creation, and validation testing.

Extension installation and configuration

Connect to your Aurora PostgreSQL cluster using the RDS Console Query Editor or a PostgreSQL client such as psql with rds_superuser (master user) credentials.

Execute the extension creation command to enable `pg_columnmask` functionality:

```
CREATE EXTENSION pg_columnmask;
```

This command installs the `pg_columnmask` extension, creates the necessary catalog tables, and registers the built-in masking functions. The extension installation is database-specific, meaning you must install it separately in each database where the functionality is required.

> **Note**
>
> - Masking policies take effect for sessions that start after you install the extension. Reconnect any existing sessions to apply masking.
> - Masking on a table is never applied for the table owner or `rds_superuser`.

Verify the extension installation by checking the available masking functions:

```
SELECT proname FROM pg_proc
    WHERE pronamespace = 'pgcolumnmask'::regnamespace AND proname LIKE 'mask_%';
    proname
--------Output --------
 mask_email
 mask_text
 mask_timestamp
(3 rows)
```

Procedures for managing data masking policies

You can manage masking policies using procedures provided by the `pg_columnmask` extension. To create, modify, or drop masking policies, you must have one of the following privileges:

- Owner of the table on which you are creating the `pg_columnmask` policy.
- Member of `rds_superuser`.
- Member of `pg_columnmask` policy manager role set by the `pgcolumnmask.policy_admin_rolname` parameter.

The following command creates a table that is used in subsequent sections:

```
CREATE TABLE public.customers (
    id SERIAL PRIMARY KEY,
    name TEXT,
    phone TEXT,
    address TEXT,
    email TEXT
);
```

CREATE_MASKING_POLICY

The following procedure creates a new masking policy for a user table:

Syntax

```
create_masking_policy(
    policy_name,
    table_name,
    masking_expressions,
    roles,
    weight,
    predicate_allow_list)
```

> **Note**
>
> The `predicate_allow_list` argument requires `pg_columnmask` extension version 1.1 or later, available in Aurora PostgreSQL 16.11 and higher, and 17.7 and higher. To update

the extension, run `ALTER EXTENSION pg_columnmask UPDATE;`. For more information, see ALTER EXTENSION in the PostgreSQL documentation.

Arguments

Parameter	Datatype	Description
`policy_name`	NAME	The name of the masking policy. Must be unique per table.
`table_name`	REGCLASS	The qualified/unqualified name or oid of the table to apply masking policy.
`masking_expressions`	JSONB	JSON object containing column name and masking function pairs. Each key is a column name and its value is the masking expression to be applied on that column.
`roles`	NAME[]	The roles to which this masking policy applies. Default is PUBLIC.
`weight`	INT	Weight of the masking policy. When multiple policies are applicable to a given user's query, the policy with the highest weight (higher integer number) will be applied to each masked column. Default is 0. No two masking policies on the table can have the same weight.

Parameter	Datatype	Description
predicate_allow_list	NAME[]	An array of column names that may be referenced in predicates, join conditions, and other filter expressions even when masked by this policy. Without this setting, predicates on masked columns raise an error. When a column is in the allow list, the predicate executes against the masked values.

Return type

None

Example of creating a masking policy that masks the email column for the `test_user` role:

```
CALL pgcolumnmask.create_masking_policy(
    'customer_mask',
    'public.customers',
    JSON_OBJECT('{
        "email", "pgcolumnmask.mask_email(email)"
    }')::JSONB,
    ARRAY['test_user'],
    100
);
```

ALTER_MASKING_POLICY

This procedure modifies an existing masking policy. `ALTER_MASKING_POLICY` can modify the policy masking expressions, set of roles to which the policy applies, the weight, and the predicate allow list of the masking policy. When one of those parameters is omitted, the corresponding part of the policy is unchanged.

Syntax

```
alter_masking_policy(
    policy_name,
    table_name,
    masking_expressions,
    roles,
    weight,
    predicate_allow_list)
```

Note

The `predicate_allow_list` argument requires `pg_columnmask` extension version 1.1 or later, available in Aurora PostgreSQL 16.11 and higher, and 17.7 and higher. To update the extension, run `ALTER EXTENSION pg_columnmask UPDATE;`. For more information, see ALTER EXTENSION in the PostgreSQL documentation.

Arguments

Parameter	Datatype	Description
`policy_name`	NAME	Existing name of the masking policy.
`table_name`	REGCLASS	The qualified/unqualified name oid of the table containing the masking policy.
`masking_expressions`	JSONB	New JSON object containing column name and masking function pairs or NULL otherwise.
`roles`	NAME[]	The list of new roles to which this masking policy applies or NULL otherwise.

Parameter	Datatype	Description
weight	INT	New weight for the masking policy or NULL otherwise.
predicate_allow_list	NAME[]	The new array of column names permitted in predicates and filter expressions, or NULL to leave unchanged.

Return type

None

Example of adding the analyst role to an existing masking policy without changing other policy attributes.

```
CALL pgcolumnmask.alter_masking_policy(
    'customer_mask',
    'public.customers',
    NULL,
    ARRAY['test_user', 'analyst'],
    NULL
);

-- Alter the weight of the policy without altering other details
CALL pgcolumnmask.alter_masking_policy(
    'customer_mask',
    'customers',
    NULL,
    NULL,
    4
);
```

DROP_MASKING_POLICY

This procedure removes an existing masking policy.

Syntax

```
drop_masking_policy(
```

```
        policy_name,
        table_name)
```

Arguments

Parameter	Datatype	Description
policy_name	NAME	The name of the masking policy.
table_name	REGCLASS	The qualified/unqualified name oid of the table containing the masking policy.

Return type

None

Example of dropping the masking policy customer_mask

```
-- Drop a masking policy
CALL pgcolumnmask.drop_masking_policy(
    'customer_mask',
    'public.customers'
);
```

RENAME_MASKING_POLICY

This procedure renames an existing masking policy.

Syntax

```
rename_masking_policy(
    policy_name,
    table_name,
    new_policy_name)
```

Arguments

Parameter	Datatype	Description
`policy_name`	NAME	The current name of the masking policy.
`table_name`	REGCLASS	The qualified/unqualified name or oid of the table containing the masking policy.
`new_policy_name`	NAME	The new name for the masking policy. Must be unique per table.

Administrative views

The `pgcolumnmask.ddm_policies` view shows masking policies on tables that you own or have management privileges on.

Column name	Data type	Description
schemaname	NAME	The schema of the table to which the policy applies.
tablename	NAME	The name of the table to which the policy applies.
policyname	NAME	The name of the masking policy.
roles	TEXT[]	The roles to which the policy applies.
masked_columns	TEXT[]	The columns masked by the policy.

Column name	Data type	Description
masking_functions	TEXT[]	The masking functions applied to the masked columns.
weight	INT	The weight of the policy.
predicate_allow_list	NAME[]	An array of column names permitted in predicates and filter expressions even when masked by the policy.

Quoted identifiers in masking policies

Mixed-case or reserved-word identifiers require double-quote escaping in policy name, schema, table, column, and role arguments. Inside JSON strings, escape double quotes with a backslash. Role names must exactly match `pg_roles` including case.

Example – quoted and unquoted identifiers

Lowercase identifiers (no quoting needed):

```
CALL pgcolumnmask.create_masking_policy(
    'ssn_policy',
    'public.employees',
    JSON_BUILD_OBJECT('ssn', 'public.mask_ssn(ssn)')::JSONB,
    ARRAY['analyst'],
    10
);
```

The same policy with mixed-case identifiers (quoting required):

```
CALL pgcolumnmask.create_masking_policy(
    '"SSN_Policy"',
    '"Public"."Employees"',
    JSON_BUILD_OBJECT('"SSN"', 'public."Mask_SSN"("SSN")')::JSONB,
    ARRAY['"Analyst"'],
    10
);
```

Both policies in `pgcolumnmask.ddm_policies`:

```
SELECT schemaname, tablename, policyname, roles, weight
    FROM pgcolumnmask.ddm_policies
    ORDER BY tablename, weight;
 schemaname | tablename | policyname | roles     | weight
------------+-----------+------------+-----------+--------
 Public     | Employees | SSN_Policy | {Analyst} |     10
 public     | employees | ssn_policy | {analyst} |     10
```

> **Note**
>
> In versions before Aurora PostgreSQL 16.11 and 17.7, the extension automatically quoted role names. In Aurora PostgreSQL 16.11 and 17.7 and later, role names are only quoted when explicitly enclosed in double quotes.

Pre-defined data masking functions

`pg_columnmask` extension provides built-in utility functions written in C language (for faster execution) which can be used as masking expression for `pg_columnmask` policies.

mask_text

A function to mask text data with configurable visibility options.

Arguments

Parameter	Datatype	Description
`input`	TEXT	The original text string to be masked
`mask_char`	CHAR(1)	Character used for masking (default: 'X')
`visible_prefix`	INT	Number of characters at the beginning of input text that will remain unmasked (default: 0)

Parameter	Datatype	Description
visible_suffix	INT	Number of characters at the end of input text that will remain unmasked (default: 0)
use_hash_mask	BOOLEAN	If TRUE, uses a hash-based masking instead of mask_char (default: FALSE)

Example of using different masking options

Mask the entire input string with the default 'X' character

```
postgres=> SELECT pgcolumnmask.mask_text('Hello World');
  mask_text
-------------
 XXXXXXXXXXX
```

Use the mask_char argument to mask text input using a different character

```
postgres=> SELECT pgcolumnmask.mask_text('Hello World', '*');
  mask_text
-------------
 ***********
```

Use visible_prefix and visible_suffix parameters to control how many characters remain unmasked at the start and end of the text

```
postgres=> SELECT pgcolumnmask.mask_text('Hello World', '*', 5, 1);
  mask_text
-------------
 Hello*****d
```

When use_hash_mask is true the input string is masked using random characters mask_char argument is ignored but visible_prefix and visible_suffix are still honored

```
postgres=> SELECT pgcolumnmask.mask_text('Hello World', '*', 2, 2, true);
  mask_text
```

```
-------------
 Hex36d0Hild
```

mask_timestamp

Parameter	Datatype	Description
ts_to_mask	TIMESTAMP	The original timestamp to be masked
mask_part	TEXT	Specifies which part of the timestamp to mask (default: 'all') Valid values: 'year', 'month', 'day', 'hour', 'minute', 'second', 'all'
mask_value	TIMESTAMP	The timestamp value to use for masking (default: '1900-01-01 00:00:00')

Example of using mask_timestamps

These examples demonstrate complete timestamp masking to a default value, partial masking of specific timestamp components (year only), and masking with a custom replacement value.

Completely mask input value to the default timestamp

```
postgres=> SELECT pgcolumnmask.mask_timestamp('2023-06-15 14:30:00');
   mask_timestamp
---------------------
 1900-01-01 00:00:00
```

To mask only one part of the timestamp from example only the year

```
postgres=> SELECT pgcolumnmask.mask_timestamp('2023-06-15 14:30:00', 'year');
   mask_timestamp
---------------------
 1900-06-15 14:30:00
```

To change the masked value for timestamp use the `mask_value` argument

```
postgres=> SELECT pgcolumnmask.mask_timestamp('2023-06-15 14:30:00', 'all', '2012-12-12
 12:12:12');
   mask_timestamp
---------------------
 2012-12-12 12:12:12
```

mask_email

A function to mask email addresses while preserving email structure.

Parameter	Datatype	Description
`input`	TEXT	The original email address to be masked
`mask_char`	CHAR(1)	Character used for masking (default: 'X')
`mask_local`	BOOLEAN	If TRUE, masks the local part of email (before @) (default: TRUE)
`mask_domain`	BOOLEAN	If TRUE, masks the domain part of email (after @) (default: TRUE)

Example of using `mask_email`

These examples demonstrate complete email masking, custom mask characters, and selective masking of either the local part or domain part of the email address.

Complete masking

```
postgres=> SELECT pgcolumnmask.mask_email('user@example.com');
    mask_email
------------------
 XXXX@XXXXXXX.com
```

Use `mask_char` to change the character used for masking

```
postgres=> SELECT pgcolumnmask.mask_email('user@example.com', '*');
    mask_email
------------------
 ****@*******.com
```

Use `mask_local` and `mask_domain` to control masking on local and domain

```
postgres=> SELECT pgcolumnmask.mask_email('user@example.com', '*', true, false);
    mask_email
------------------
 ****@example.com

postgres=> SELECT pgcolumnmask.mask_email('user@example.com', '*', false, true);
    mask_email
------------------
 user@*******.com
```

Implementing pg_columnmask in an end-to-end workflow

This section demonstrates a complete implementation of `pg_columnmask` using a sample employee table with sensitive data. You'll learn how to create custom masking functions, define multiple masking policies with different weight levels for various roles (intern, support, analyst), and observe how users with single or multiple role memberships see different levels of masked data. The examples also cover masking behavior in DML statements with RETURNING clauses, triggers on tables versus views, and policy management operations including renaming, altering weights, and cleanup.

1. Create a sample table with some sensitive data:

```
CREATE SCHEMA hr;

CREATE TABLE hr.employees (
    id INT PRIMARY KEY,
    name TEXT NOT NULL,
    email TEXT,
    ssn TEXT,
    salary NUMERIC(10,2)
 );
```

```
INSERT INTO hr.employees VALUES
    (1, 'John Doe', 'john.doe@example.com', '123-45-6789', 50000.00),
    (2, 'Jane Smith', 'jane.smith@example.com', '987-65-4321', 60000.00);
```

2. Create custom masking functions. The `mask_ssn` function uses `BEGIN ATOMIC` syntax for early binding semantics (see Secure masking function development). PL/pgSQL functions are also supported, as shown with `mask_salary`:

```
CREATE OR REPLACE FUNCTION public.mask_ssn(ssn TEXT)
    RETURNS TEXT
    LANGUAGE SQL
    IMMUTABLE PARALLEL SAFE STRICT
    BEGIN ATOMIC
        SELECT 'XXX-XX-' || right(ssn, 4);
    END;

CREATE OR REPLACE FUNCTION public.mask_salary(salary NUMERIC, multiplier NUMERIC
 DEFAULT 0.0)
    RETURNS NUMERIC AS $$
    BEGIN
        RETURN salary * multiplier;
    END;
    $$ LANGUAGE plpgsql;
```

3. Create multiple policies with different masking levels based on user roles:

```
-- Create different roles
CREATE ROLE analyst_role;
CREATE ROLE support_role;
CREATE ROLE intern_role;

GRANT USAGE ON SCHEMA hr TO analyst_role, support_role, intern_role;
GRANT SELECT ON hr.employees TO analyst_role, support_role, intern_role;
-----------------------------------------------------------------------

-- Low-Weight Policy (Intern)
CALL pgcolumnmask.create_masking_policy(
    'employee_mask_strict',
    'hr.employees',
    JSON_BUILD_OBJECT('name', 'pgcolumnmask.mask_text(name, ''*'')',
                      'email', 'pgcolumnmask.mask_email(email)',
                      'ssn', 'pgcolumnmask.mask_text(ssn, ''*'')',
                      'salary', 'public.mask_salary(salary)')::JSONB,
```

```
    ARRAY['intern_role'],
    10  -- Lowest weight
);

-------------------------------------------------------------------------
-- Medium-Weight Policy (Support)
CALL pgcolumnmask.create_masking_policy(
    'employee_mask_moderate',
    'hr.employees',
    JSON_BUILD_OBJECT('email', 'pgcolumnmask.mask_email(email, ''#'')',
                      'ssn', 'public.mask_ssn(ssn)',
                      'salary', 'public.mask_salary(salary)')::JSONB,
    ARRAY['support_role'],
    50   -- Medium weight
);

-------------------------------------------------------------------------
-- High-Weight Policy (Analyst)
CALL pgcolumnmask.create_masking_policy(
    'employee_mask_light',
    'hr.employees',
    JSON_BUILD_OBJECT('ssn', 'public.mask_ssn(ssn)',
                      'salary', 'public.mask_salary(salary, 0.9)')::JSONB,
    ARRAY['analyst_role'],
    100   -- Highest weight
);
```

4. The following examples demonstrate how different users see data based on their role membership and policy weights.

```
-- Create users
CREATE USER sarah_intern;
GRANT intern_role TO sarah_intern;

CREATE USER lisa_support;
GRANT support_role TO lisa_support;

CREATE USER mike_analyst;
GRANT analyst_role TO mike_analyst;

CREATE USER ethan_support_intern;
GRANT support_role, intern_role TO ethan_support_intern;
```

```
CREATE USER john_analyst_intern;
GRANT analyst_role, intern_role TO john_analyst_intern;
```

As an intern (strictest masking):

```
SET ROLE sarah_intern;

SELECT * FROM hr.employees;
 id |    name    |         email          |     ssn     | salary
----+------------+------------------------+-------------+--------
  1 | ********   | XXXXXXXX@XXXXXXX.com   | ********** |   0.00
  2 | ********** | XXXXXXXXXX@XXXXXXX.com | ********** |   0.00
```

As a support user (moderate masking):

```
SET ROLE lisa_support;

SELECT * FROM hr.employees;
 id |    name    |         email          |     ssn     | salary
----+------------+------------------------+-------------+--------
  1 | John Doe   | ########@#######.com   | XXX-XX-6789 |   0.00
  2 | Jane Smith | ##########@#######.com | XXX-XX-4321 |   0.00
```

As an analyst (lightest masking):

```
SET ROLE mike_analyst;

SELECT * FROM hr.employees;
 id |    name    |         email          |     ssn     |  salary
----+------------+------------------------+-------------+----------
  1 | John Doe   | john.doe@example.com   | XXX-XX-6789 | 45000.00
  2 | Jane Smith | jane.smith@example.com | XXX-XX-4321 | 54000.00
```

As ethan_support_intern user which is both intern and support user:

```
SET ROLE ethan_support_intern;

-- masking policies appliable to this user: employee_mask_strict and
 employee_mask_moderate
-- id : unmasked because no masking policy appliable on ethan_support_intern
--            masks these columns
```

```
-- name : masked because of employee_mask_strict policy
-- email, ssn, salary : both employee_mask_strict and employee_mask_moderate mask
 these columns
--                      but employee_mask_moderate will be use because of higher
 weight

SELECT * FROM hr.employees;
 id |    name    |         email          |     ssn     | salary
----+------------+------------------------+-------------+--------
  1 | ********   | ########@#######.com   | XXX-XX-6789 |   0.00
  2 | ********** | ##########@#######.com | XXX-XX-4321 |   0.00
```

As a john_analyst_intern which is both intern and analyst:

```
SET ROLE john_analyst_intern;

-- masking policies appliable to this user: employee_mask_strict and
 employee_mask_light
-- id : unmasked because no masking policy appliable on john_analyst_intern
--            masks these columns
-- name, email : masked because of employee_mask_strict
-- ssn, salary : both employee_mask_strict and employee_mask_light mask these
 columns
--               but employee_mask_light will be use because of higher weight

SELECT * FROM hr.employees;
 id |    name    |         email          |     ssn     |  salary
----+------------+------------------------+-------------+----------
  1 | ********   | XXXXXXXX@XXXXXXX.com   | XXX-XX-6789 | 45000.00
  2 | ********** | XXXXXXXXXX@XXXXXXX.com | XXX-XX-4321 | 54000.00
```

Understanding masking behavior in DML operations

pg_columnmask applies consistently across all DML operations, including INSERT, UPDATE, DELETE, and MERGE statements. When you execute these operations, Aurora PostgreSQL masks data according to a core principle – any data read from storage is masked according to the current user's applicable policies.

Masking affects some of the following query components like:

- WHERE clauses

- JOIN conditions
- Subqueries
- RETURNING clauses

All of these components operate on masked values, not the original data. While data is written to storage unmasked, users only see their masked view when reading it back.

Aurora PostgreSQL enforces all database constraints (NOT NULL, UNIQUE, CHECK, FOREIGN KEY) on the actual stored values, not masked values. This can occasionally create apparent inconsistencies if masking functions aren't carefully designed.

Masking works alongside column-level permissions:

- Users without SELECT privileges cannot read columns
- Users with SELECT privileges see masked values according to their applicable policies

Understanding masking behavior in trigger functions

When `pg_columnmask` policies are applied to tables, it's important to understand how masking interacts with trigger functions. Triggers are database functions that execute automatically in response to certain events on a table, such as INSERT, UPDATE, or DELETE operations.

By default, DDM applies different masking rules depending on the type of trigger:

Table triggers

Transition tables are unmasked – Trigger functions on tables have access to unmasked data in their transition tables for both old and new row versions

Table owners create triggers and own the data, so they have full access to manage their tables effectively

View Triggers (INSTEAD OF Triggers)

Transition tables are masked – Trigger functions on views see masked data according to the current user's permissions

View owners may differ from base table owners and should respect masking policies on underlying tables

Two server-level configuration parameters control trigger behavior with masked tables. These can only be set by `rds_superuser`:

- **Restrict Triggers on Masked Tables** – Prevents trigger execution when a masked user performs DML operations on tables with applicable masking policies.
- **Restrict Triggers on Views with Masked Tables:** – Prevents trigger execution on views when the view definition includes tables with masking policies applicable to the current user.

Example of differences between function application to table and view

The following example creates a trigger function that prints old and new row values, then demonstrates how the same function behaves differently when attached to a table versus a view.

```
-- Create trigger function
CREATE OR REPLACE FUNCTION print_changes()
    RETURNS TRIGGER AS
    $$
        BEGIN
        RAISE NOTICE 'Old row: name=%, email=%, ssn=%, salary=%',
            OLD.name, OLD.email, OLD.ssn, OLD.salary;

        RAISE NOTICE 'New row: name=%, email=%, ssn=%, salary=%',
            NEW.name, NEW.email, NEW.ssn, NEW.salary;

        RETURN NEW;
        END;
    $$ LANGUAGE plpgsql;

-- Create trigger
CREATE TRIGGER print_changes_trigger
    BEFORE UPDATE ON hr.employees
    FOR EACH ROW
    EXECUTE FUNCTION print_changes();

-- Grant update to analyst role
GRANT UPDATE ON hr.employees TO analyst_role;

-- Unmasked data must be seen inside trigger even for masked user for the OLD and NEW
-- row passed to trigger function
BEGIN;
SET ROLE mike_analyst;
UPDATE hr.employees SET id = id + 10 RETURNING *;
```

```
NOTICE:  Old row: name=John Doe, email=john.doe@example.com, ssn=123-45-6789,
 salary=50000.00
NOTICE:  New row: name=John Doe, email=john.doe@example.com, ssn=123-45-6789,
 salary=50000.00
NOTICE:  Old row: name=Jane Smith, email=jane.smith@example.com, ssn=987-65-4321,
 salary=60000.00
NOTICE:  New row: name=Jane Smith, email=jane.smith@example.com, ssn=987-65-4321,
 salary=60000.00
 id |    name    |         email          |     ssn     |  salary
----+------------+------------------------+-------------+----------
 11 | John Doe   | john.doe@example.com   | XXX-XX-6789 | 45000.00
 12 | Jane Smith | jane.smith@example.com | XXX-XX-4321 | 54000.00
(2 rows)

ROLLBACK;


-- Triggers on views (which are supposed to see masked data for new/old row)
CREATE VIEW hr.view_over_employees AS SELECT * FROM hr.employees;
GRANT UPDATE, SELECT ON hr.view_over_employees TO analyst_role;

-- Create trigger for this view
CREATE TRIGGER print_changes_trigger
    INSTEAD OF UPDATE ON hr.view_over_employees
    FOR EACH ROW
    EXECUTE FUNCTION print_changes();

-- Masked new and old rows should be passed to trigger if trigger is on view
BEGIN;
SET ROLE mike_analyst;
UPDATE hr.view_over_employees SET id = id + 10 RETURNING *;
NOTICE:  Old row: name=John Doe, email=john.doe@example.com, ssn=XXX-XX-6789,
 salary=45000.00
NOTICE:  New row: name=John Doe, email=john.doe@example.com, ssn=XXX-XX-6789,
 salary=45000.00
NOTICE:  Old row: name=Jane Smith, email=jane.smith@example.com, ssn=XXX-XX-4321,
 salary=54000.00
NOTICE:  New row: name=Jane Smith, email=jane.smith@example.com, ssn=XXX-XX-4321,
 salary=54000.00
 id |    name    |         email          |     ssn     |  salary
----+------------+------------------------+-------------+----------
 11 | John Doe   | john.doe@example.com   | XXX-XX-6789 | 45000.00
 12 | Jane Smith | jane.smith@example.com | XXX-XX-4321 | 54000.00
(2 rows)
```

```
ROLLBACK;
```

We recommend reviewing trigger behavior before implementing triggers on masked tables. Table triggers have access to unmasked data in transition tables, while view triggers see masked data.

Example of renaming masking policy

The following example demonstrates how to rename existing policies using the `rename_masking_policy` procedure.

```
-- Rename the strict policy
CALL pgcolumnmask.rename_masking_policy(
    'employee_mask_strict',
    'hr.employees',
    'intern_protection_policy'
);

-- Verify the rename
SELECT policyname, roles, weight
    FROM pgcolumnmask.ddm_policies
    WHERE tablename = 'employees'
    ORDER BY weight DESC;

        policyname        |     roles      | weight
--------------------------+----------------+--------
 employee_mask_light      | {analyst_role} |    100
 employee_mask_moderate   | {support_role} |     50
 intern_protection_policy | {intern_role}  |     10
```

Example of altering policy weight

The following example demonstrates how to alter policy weights to change their weight.

```
-- Change weight of moderate policy
CALL pgcolumnmask.alter_masking_policy(
    'employee_mask_moderate'::NAME,
    'hr.employees'::REGCLASS,
    NULL,    -- Keep existing masking expressions
    NULL,    -- Keep existing roles
    75       -- New weight
);
```

```
-- Verify the changes
SELECT policyname, roles, weight
    FROM pgcolumnmask.ddm_policies
    WHERE tablename = 'employees'
    ORDER BY weight DESC;
        policyname        |     roles      | weight
--------------------------+----------------+--------
 employee_mask_light      | {analyst_role} |    100
 employee_mask_moderate   | {support_role} |     75
 intern_protection_policy | {intern_role}  |     10
```

Example of cleaning up

The following example demonstrates how to drop all policies, tables and users.

```
-- Drop policies
CALL pgcolumnmask.drop_masking_policy(
    'intern_protection_policy',
    'hr.employees'
);

CALL pgcolumnmask.drop_masking_policy(
    'employee_mask_moderate',
    'hr.employees'
);

CALL pgcolumnmask.drop_masking_policy(
    'employee_mask_light',
    'hr.employees'
);

-- Drop table and functions
DROP VIEW IF EXISTS hr.view_over_employees;
DROP TABLE IF EXISTS hr.employees;
DROP SCHEMA IF EXISTS hr;
DROP FUNCTION IF EXISTS public.mask_ssn(text);
DROP FUNCTION IF EXISTS public.mask_salary(numeric, numeric);

-- Drop users
DROP USER sarah_intern, lisa_support, mike_analyst,
    ethan_support_intern, john_analyst_intern;
DROP ROLE intern_role, support_role, analyst_role;
```

Configuring masking policy management role

The PostgreSQL column masking extension, `pg_columnmask`, allows you to delegate the management of masking policies to a specific role, rather than requiring `rds_superuser` or table owner privileges. This provides more granular control over who can create, alter, and drop masking policies.

To configure the role that will have masking policy management privileges, follow these steps:

1. Create the policy admin role – As an `rds_superuser`, create a new role responsible for managing masking policies:

   ```
   CREATE ROLE mask_admin NOLOGIN;
   ```

2. Configure the PostgreSQL parameter – In your custom DB cluster parameter group, set the `pgcolumnmask.policy_admin_rolname` engine configuration parameter to the name of the role you created:

   ```
   pgcolumnmask.policy_admin_rolname = mask_admin
   ```

   This engine configuration parameters can be set in a DB cluster parameter group and it does not require an instance reboot. For details on updating parameter, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

3. Grant the role to users As an `rds_superuser`, grant the `mask_admin` role to the users who should be able to manage masking policies:

   ```
   CREATE USER alice LOGIN;
   CREATE USER bob LOGIN;
   GRANT mask_admin TO alice, bob;
   ```

   Additionally, ensure that the users have USAGE privilege on the schemas where they will be managing masking policies:

   ```
   GRANT USAGE ON SCHEMA hr TO alice, bob;
   ```

Now, when users `alice` and bob connect to the database, they can use the standard `pg_columnmask` extension functions to create, alter, and drop masking policies on all tables in all the schemas where they have USAGE privilege on the schema.

Best practices for secure pg_columnmask implementation

The following section provides security best practices for implementing `pg_columnmask` in your Aurora PostgreSQL environment. Follow these recommendations to:

- Establish a secure role-based access control architecture
- Develop masking functions that prevent unintended data disclosure
- Understand and control trigger behavior with masked data
- Understand cursor behavior and the masking resolution window

Role-based security architecture

Define a role hierarchy to implement access controls in your database. Aurora PostgreSQL `pg_columnmask` augments these controls by providing an additional layer for fine-grained data masking within those roles.

Create dedicated roles that align with organizational functions rather than granting permissions to individual users. This approach provides better auditability and simplifies permission management as your organizational structure evolves.

Example of creating an organizational role hierarchy

The following example creates an organizational role hierarchy with dedicated roles for different functions, then assigns individual users to the appropriate roles. In this example, organizational roles (analyst_role, support_role) are created first, then individual users are granted membership in these roles. This structure allows you to manage permissions at the role level rather than for each individual user.

```
-- Create organizational role hierarchy
CREATE ROLE data_admin_role;
CREATE ROLE security_admin_role;
CREATE ROLE analyst_role;
CREATE ROLE support_role;
CREATE ROLE developer_role;

-- Specify security_admin_role as masking policy manager in the DB cluster parameter
-- group pgcolumnmask.policy_admin_rolname = 'security_admin_role'

-- Create specific users and assign to appropriate roles
```

```
CREATE USER security_manager;
CREATE USER data_analyst1, data_analyst2;
CREATE USER support_agent1, support_agent2;

GRANT security_admin_role TO security_manager;
GRANT analyst_role TO data_analyst1, data_analyst2;
GRANT support_role TO support_agent1, support_agent2;
```

Implement the principle of least privilege by granting only the minimum permissions necessary for each role. Avoid granting broad permissions that an unauthorized user could leverage to perform inappropriate actions if they gain access to credentials.

```
-- Grant specific table permissions rather than schema-wide access
GRANT SELECT ON sensitive_data.customers TO analyst_role;
GRANT SELECT ON sensitive_data.transactions TO analyst_role;
-- Do not grant: GRANT ALL ON SCHEMA sensitive_data TO analyst_role;
```

Policy administrators require USAGE privileges on schemas where they manage masking policies. Grant these privileges selectively, following the principle of least privilege. Conduct regular reviews of schema access permissions to ensure only authorized personnel maintain policy management capabilities.

The policy admin role parameter configuration is restricted to database administrators only. This parameter cannot be modified at the database or session level, preventing unprivileged users from overriding policy admin assignments. This restriction ensures that masking policy control remains centralized and secure.

Assign the policy admin role to specific individuals rather than groups. This targeted approach ensures selective access to masking policy management, as policy administrators have the ability to mask all tables within the database.

Secure masking function development

Follow these three practices when developing masking functions:

- **Early binding** – Use `BEGIN ATOMIC` syntax to enable compile-time validation and dependency tracking. This prevents late binding issues such as search path modification at runtime.
- **Schema qualification** – Schema-qualify all object references to make functions immune to search path changes.

- **Input validation** – Use `STRICT` to return NULL for NULL input, and validate input formats to handle edge cases.

The following example demonstrates all three practices:

```
-- Secure masking function combining early binding, schema qualification,
-- and input validation
CREATE OR REPLACE FUNCTION data_masking.secure_mask_phone(phone_number TEXT)
    RETURNS TEXT
    LANGUAGE SQL
    IMMUTABLE PARALLEL SAFE STRICT
    BEGIN ATOMIC
        -- STRICT returns NULL automatically for NULL input
        SELECT CASE
            -- Input validation: fully mask values with fewer than 10 digits
            WHEN pg_catalog.length(pg_catalog.regexp_replace(phone_number, '[^0-9]',
 '', 'g')) < 10
                THEN 'XXX-XXX-XXXX'
            -- Show only the last four digits; schema-qualified calls are not affected
 by search path changes
            ELSE pg_catalog.concat('XXX-XXX-',
                pg_catalog.right(pg_catalog.regexp_replace(phone_number, '[^0-9]', '',
 'g'), 4))
        END;
    END;
```

Cursor behavior with pg_columnmask

`pg_columnmask` resolves masking at `DECLARE CURSOR` time, not on each `FETCH`. This is consistent with PostgreSQL semantics, where privileges and row-level security are evaluated once at `DECLARE`.

- **Role changes after declaration** – A cursor's masking behavior is fixed at declaration time. Changes to role membership after declaration, whether granting a restrictive role or revoking an exempt role, do not affect data returned by that cursor.
- **WITH HOLD cursors** – `WITH HOLD` cursors survive `COMMIT` and retain the masking context from declaration until the cursor is closed or the session ends.

Open cursors retain the masking context from declaration. Only newly declared cursors reflect current role membership.

Example of cursor retaining cleartext after concurrent role revocation

```
-- Session 1 (data_analyst1):
BEGIN;
DECLARE customer_cursor CURSOR FOR SELECT id, name, email FROM customers;

-- Cursor returns cleartext because data_analyst1 holds the cleartext_reader role
FETCH 1 FROM customer_cursor;
 id |   name   |      email
----+----------+------------------
  1 | John Doe | john@example.com

-- Session 2 (security_admin):
REVOKE cleartext_reader FROM data_analyst1;

-- Session 1 (data_analyst1):
-- Cursor still returns cleartext because masking was resolved at DECLARE time
FETCH 1 FROM customer_cursor;
 id |    name    |      email
----+------------+------------------
  2 | Jane Smith | jane@example.com

-- Only a newly declared cursor reflects the updated role membership
COMMIT;
BEGIN;
DECLARE customer_cursor CURSOR FOR SELECT id, name, email FROM customers;
FETCH 1 FROM customer_cursor;
 id |   name   |      email
----+----------+------------------
  1 | XXXXXXXX | XXXX@XXXXXXX.com
```

DML Triggers behavior with pg_columnmask

For table triggers, transition tables will be fully unmasked. For view triggers(IOT), transition tables will be masked according to the current user's view permissions.

Table triggers with pg_columnmask

Triggers are passed a transition table which contains the old and new version of the rows modified by the firing DML query. Depending upon when the trigger is fired, Aurora PostgreSQL populates the old and new rows. For example, a `BEFORE INSERT` trigger only has new versions of the rows and empty old versions because there is no old version to refer.

pg_columnmask does not mask transition tables inside triggers on tables. Triggers can use masked columns inside their body and it sees unmasked data. The trigger creator should make sure how the trigger gets executed for an user. The following example works correctly in this case.

```
-- Example for table trigger uses masked column in its definition
-- Create a table and insert some rows
CREATE TABLE public.credit_card_table (
    name TEXT,
    credit_card_no VARCHAR(16),
    is_fraud BOOL
);

INSERT INTO public.credit_card_table (name, credit_card_no, is_fraud)
    VALUES
    ('John Doe', '4532015112830366', false),
    ('Jane Smith', '5410000000000000', true),
    ('Brad Smith', '1234567891234567', true);

-- Create a role which will see masked data and grant it privileges
CREATE ROLE intern_user;
GRANT SELECT, DELETE ON public.credit_card_table TO intern_user;

-- Trigger which will silenty skip delete of non fraudelent credit cards
CREATE OR REPLACE FUNCTION prevent_non_fraud_delete()
    RETURNS TRIGGER AS
    $$
    BEGIN
        IF OLD.is_fraud = false THEN
            RETURN NULL;
        END IF;
        RETURN OLD;
    END;
    $$ LANGUAGE plpgsql;

CREATE TRIGGER prevent_non_fraud_delete
    BEFORE DELETE ON credit_card_table
    FOR EACH ROW
    EXECUTE FUNCTION prevent_non_fraud_delete();

CREATE OR REPLACE FUNCTION public.return_false()
    RETURNS BOOLEAN
    LANGUAGE SQL
```

```
    IMMUTABLE PARALLEL SAFE STRICT
    BEGIN ATOMIC
      SELECT false;
    END;

-- A masking policy that masks both credit card number and is_fraud column.
-- If we apply masking inside trigger then prevent_non_fraud_delete trigger will
-- allow deleting more rows to masked user (even non fraud ones).
CALL pgcolumnmask.create_masking_policy(
    'mask_credit_card_no_&_is_fraud'::NAME,
    'public.credit_card_table'::REGCLASS,
    JSON_BUILD_OBJECT('credit_card_no', 'pgcolumnmask.mask_text(credit_card_no)',
                      'is_fraud', 'public.return_false()')::JSONB,
    ARRAY['intern_user']::NAME[],
    10::INT
);

-- Test trigger behaviour using intern_user
BEGIN;
SET ROLE intern_user;
-- credit card number & is_fraud is completely masked from intern_user
SELECT * FROM public.credit_card_table;
    name    |  credit_card_no  | is_fraud
------------+------------------+----------
 John Doe   | XXXXXXXXXXXXXXXX | f
 Jane Smith | XXXXXXXXXXXXXXXX | f
 Brad Smith | XXXXXXXXXXXXXXXX | f
(3 rows)

-- The delete trigger lets the intern user delete rows for Jane and Brad even though
-- intern_user sees their is_fraud = false, but the table trigger works with
 original
-- unmasked value
DELETE FROM public.credit_card_table RETURNING *;
    name    |  credit_card_no  | is_fraud
------------+------------------+----------
 Jane Smith | XXXXXXXXXXXXXXXX | f
 Brad Smith | XXXXXXXXXXXXXXXX | f
(2 rows)

COMMIT;
```

A trigger can unintentionally disclose unmasked data to the current user if the trigger creator is not careful about the statements they use in the trigger body. For example using a `RAISE NOTICE '%', masked_column;` prints the column to current user.

```
-- Example showing table trigger disclosing column value to current user
CREATE OR REPLACE FUNCTION notice_trigger_func()
    RETURNS TRIGGER AS
    $$
    BEGIN
        RAISE NOTICE 'Old credit card number was: %', OLD.credit_card_no;
        RAISE NOTICE 'New credit card number is %', NEW.credit_card_no;
        RETURN NEW;
    END;
    $$ LANGUAGE plpgsql;

CREATE TRIGGER notice_trigger
    AFTER UPDATE ON public.credit_card_table
    FOR EACH ROW
    EXECUTE FUNCTION notice_trigger_func();

-- Grant update on column is_fraud to auditor role
-- auditor will NOT HAVE PERMISSION TO READ DATA
CREATE ROLE auditor;
GRANT UPDATE (is_fraud) ON public.credit_card_table TO auditor;

-- Also add auditor role to existing masking policy on credit card table
CALL pgcolumnmask.alter_masking_policy(
    'mask_credit_card_no_&_is_fraud'::NAME,
    'public.credit_card_table'::REGCLASS,
    NULL::JSONB,
    ARRAY['intern_user', 'auditor']::NAME[],
    NULL::INT
);

-- Log in as auditor
-- [auditor]
-- Update fails because the WHERE clause references a masked column
UPDATE public.credit_card_table
    SET is_fraud = true
    WHERE credit_card_no = '4532015112830366';
ERROR:  predicates on masked columns are not allowed
HINT:  Add the column to the predicate allow list using
 pgcolumnmask.alter_masking_policy.
```

```
-- [auditor]
-- But notice_trigger will still print the unmasked values even though
-- current user does not have permission to select from public.credit_card_table
UPDATE public.credit_card_table SET is_fraud = true;
NOTICE:  Old credit card number was: 4532015112830366
NOTICE:  New credit card number is 4532015112830366
UPDATE 1
```

Triggers on views with pg_columnmask (Instead of triggers)

You can create `INSTEAD OF` triggers only on views in PostgreSQL. They are used for running DML statements on views that are not updatable. Transit tables are always masked inside instead of trigger (IOT), because the view and the base tables used inside the view query could have different owners. In which case, base tables might have some masking policies applicable on the view owner and the view owner must always see masked data from base tables inside its triggers. This is different from triggers on tables because in that case the trigger creator and the data inside the tables are owned by the same user which is not the case here.

```
-- Create a view over credit card table
CREATE OR REPLACE VIEW public.credit_card_view
    AS
    SELECT * FROM public.credit_card_table;

-- Truncate credit card table and insert fresh data
TRUNCATE TABLE public.credit_card_table;
INSERT INTO public.credit_card_table (name, credit_card_no, is_fraud)
    VALUES
    ('John Doe', '4532015112830366', false),
    ('Jane Smith', '5410000000000000', true),
    ('Brad Smith', '1234567891234567', true);

CREATE OR REPLACE FUNCTION public.print_changes()
    RETURNS TRIGGER AS
    $$
    BEGIN
        RAISE NOTICE 'Old row: name=%, credit card number=%, is fraud=%',
            OLD.name, OLD.credit_card_no, OLD.is_fraud;

        RAISE NOTICE 'New row: name=%, credit card number=%, is fraud=%',
            NEW.name, NEW.credit_card_no, NEW.is_fraud;
```

```
    RETURN NEW;
   END;
   $$ LANGUAGE plpgsql;

CREATE TRIGGER print_changes_trigger
    INSTEAD OF UPDATE ON public.credit_card_view
    FOR EACH ROW
    EXECUTE FUNCTION public.print_changes();

GRANT SELECT, UPDATE ON public.credit_card_view TO auditor;

-- [auditor]
-- Login as auditor role
BEGIN;

-- Any data coming out from the table will be masked in instead of triggers
-- according to masking policies applicable to current user
UPDATE public.credit_card_view
    SET name = CONCAT(name, '_new_name')
    RETURNING *;
NOTICE:  Old row: name=John Doe, credit card number=XXXXXXXXXXXXXXXX, is fraud=f
NOTICE:  New row: name=John Doe_new_name, credit card number=XXXXXXXXXXXXXXXX, is
 fraud=f
NOTICE:  Old row: name=Jane Smith, credit card number=XXXXXXXXXXXXXXXX, is fraud=f
NOTICE:  New row: name=Jane Smith_new_name, credit card number=XXXXXXXXXXXXXXXX, is
 fraud=f
NOTICE:  Old row: name=Brad Smith, credit card number=XXXXXXXXXXXXXXXX, is fraud=f
NOTICE:  New row: name=Brad Smith_new_name, credit card number=XXXXXXXXXXXXXXXX, is
 fraud=f
        name         |  credit_card_no  | is_fraud
---------------------+------------------+----------
 John Doe_new_name   | XXXXXXXXXXXXXXXX | f
 Jane Smith_new_name | XXXXXXXXXXXXXXXX | f
 Brad Smith_new_name | XXXXXXXXXXXXXXXX | f

 -- Any new data going into the table using INSERT or UPDATE command will be
 unmasked
 UPDATE public.credit_card_view
    SET credit_card_no = '9876987698769876'
    RETURNING *;
NOTICE:  Old row: name=John Doe, credit card number=XXXXXXXXXXXXXXXX, is fraud=f
NOTICE:  New row: name=John Doe, credit card number=9876987698769876, is fraud=f
NOTICE:  Old row: name=Jane Smith, credit card number=XXXXXXXXXXXXXXXX, is fraud=f
NOTICE:  New row: name=Jane Smith, credit card number=9876987698769876, is fraud=f
```

```
NOTICE:  Old row: name=Brad Smith, credit card number=XXXXXXXXXXXXXXXX, is fraud=f
NOTICE:  New row: name=Brad Smith, credit card number=9876987698769876, is fraud=f
    name    |  credit_card_no  | is_fraud
------------+------------------+----------
 John Doe   | 9876987698769876 | f
 Jane Smith | 9876987698769876 | f
 Brad Smith | 9876987698769876 | f

 COMMIT;
```

Database/User level GuCs to control triggers behavior

Two configuration parameters control trigger execution behavior for users with applicable masking policies. Use these parameters to prevent triggers from executing on masked tables or views when additional security restrictions are required. Both parameters are disabled by default, allowing triggers to execute normally.

First GUC: Trigger firing restriction on masked tables

Specifications:

- Name: `pgcolumnmask.restrict_dml_triggers_for_masked_users`
- Type: `boolean`
- Default: `false` (triggers are allowed to be executed)

Prevents trigger execution on masked tables for masked users when set to TRUE. `pg_columnmask` runs through the error.

Second GUC: Trigger firing restriction on views with masked tables

Specifications:

- Name: `pgcolumnmask.restrict_iot_triggers_for_masked_users`
- Type: `boolean`
- Default: `false` (triggers are allowed to be executed)

Prevents trigger execution on views that include masked tables in their definition for masked users when set to TRUE.

These parameters operate independently and are configurable like standard database configuration parameters.

Aurora PostgreSQL pg_columnmask data movement scenarios

pg_columnmask behavior varies across different data movement operations depending on whether the operation occurs at the storage, logical, or application layer. Storage-level operations (such as cloning) behave differently from logical operations (such as pg_dump) and application-level operations (such as FDW queries). This section describes masking behavior for common scenarios including replication, backups, exports, and migrations, and explains the security implications for each.

Topics

- Aurora Global Database and Read Replicas
- Database clone and snapshot restore
- Logical replication
- Blue/Green deployments
- Zero-ETL and CDC streams
- Amazon Database Migration Service
- Data exports
- Views and materialized views
- Data dump and restore
- Foreign data wrapper

Aurora Global Database and Read Replicas

Aurora pg_columnmask policies are stored in database system tables within the cluster volume. All replicas access the same policies and return consistently masked results. For Aurora Global Database deployments, pg_columnmask policies replicate to secondary Amazon Web Services Regions along with other database system tables, ensuring consistent data protection across regions. During failover scenarios, all pg_columnmask policies remain intact and functional.

Database clone and snapshot restore

Aurora Fast Clone and snapshot restore operations preserve all pg_columnmask policies, roles, and configurations as part of the database system tables. The cloned or restored database inherits all existing policies from the source cluster. After cloning or restoration, each database cluster maintains independent pg_columnmask policies.

Logical replication

During initial synchronization, logical replication uses standard SQL COPY operations, and `pg_columnmask` policies are enforced based on the replication user's permissions. During ongoing CDC (change data capture), masking policies are not applied and unmasked data is replicated through WAL records. Users with `pg_create_subscription` privileges can potentially exfiltrate unmasked data by setting up replication to a system they control.

Blue/Green deployments

During snapshot restoration, `pg_columnmask` policies are automatically included. The green environment starts with an identical copy of all policies from the blue environment. During replication from blue to green, data is not masked. Subsequent masking policy changes (DDL commands) on the blue cluster do not replicate to the green cluster and invalidate RDS blue/green deployments.

Zero-ETL and CDC streams

Data replication is not affected by `pg_columnmask` policies. Zero-ETL supports DDL replication but doesn't replicate `pg_columnmask` or RLS policies. No masking policies are applied to replicated data in Zero-ETL.

Amazon Database Migration Service

Initial data sync is masked or unmasked based on the user selected for the DMS task. CDC data is always unmasked. While `pg_columnmask` related internal RLS policies may be migrated, they won't function on non-pg_columnmask-enabled targets.

Data exports

`pg_columnmask` treats exports like any other query operation—masking is applied based on the executing user's permissions. This applies to SQL commands like COPY, SELECT INTO, CREATE TABLE AS, and Aurora PostgreSQL's S3 export functionality.

> **Note**
>
> When masked users export data, the resulting files contain masked values that may violate database constraints when restored.

Views and materialized views

Keep the following considerations in mind when using views:

- **Regular views** – Always use `INVOKER` semantics. The current user's masking policies apply when querying the view, regardless of who created the view.
- **Materialized views** – When refreshed, the masking policies of the materialized view owner apply, not the policies of the user performing the refresh. If the owner has masking policies, the materialized view always contains masked data.

Data dump and restore

`pg_dump` operates as a regular database user and applies masking policies based on the connecting user's permissions. If a masked user performs a dump, the backup file contains masked data. `pg_columnmask` policies are included in the dump as part of the database schema. Successful restoration requires that all referenced roles exist in the target database and that the target has the `pg_columnmask` extension installed.

> **Note**
>
> Starting with PostgreSQL 18, `pg_dump` supports the `–no-policies` option which excludes both Row Level Security (RLS) and `pg_columnmask` masking policies from database dumps. For more information, see pg_dump.

Foreign data wrapper

When using foreign data wrappers, masking policies on remote tables are applied based on the mapped user's permissions on the source server, not the local querying user's permissions, and while you can access masked remote data through FDW, you cannot create DDM or RLS policies directly on foreign tables in your local database.

Updating applications to connect to Aurora PostgreSQL DB clusters using new SSL/TLS certificates

As of January 13, 2023, Amazon RDS has published new Certificate Authority (CA) certificates for connecting to your Aurora DB clusters using Secure Socket Layer or Transport Layer Security

(SSL/TLS). Following, you can find information about updating your applications to use the new certificates.

This topic can help you to determine whether any client applications use SSL/TLS to connect to your DB clusters. If they do, you can further check whether those applications require certificate verification to connect.

> **Note**
>
> Some applications are configured to connect to Aurora PostgreSQL DB clusters only if they can successfully verify the certificate on the server.
> For such applications, you must update your client application trust stores to include the new CA certificates.

After you update your CA certificates in the client application trust stores, you can rotate the certificates on your DB clusters. We strongly recommend testing these procedures in a development or staging environment before implementing them in your production environments.

For more information about certificate rotation, see Rotating your SSL/TLS certificate. For more information about downloading certificates, see Using SSL/TLS to encrypt a connection to a DB cluster. For information about using SSL/TLS with PostgreSQL DB clusters, see Securing Aurora PostgreSQL data with SSL/TLS.

Topics

- Determining whether applications are connecting to Aurora PostgreSQL DB clusters using SSL
- Determining whether a client requires certificate verification in order to connect
- Updating your application trust store
- Using SSL/TLS connections for different types of applications

Determining whether applications are connecting to Aurora PostgreSQL DB clusters using SSL

Check the DB cluster configuration for the value of the `rds.force_ssl` parameter. By default, the `rds.force_ssl` parameter is set to `0` (off). If the `rds.force_ssl` parameter is set to `1` (on), clients are required to use SSL/TLS for connections. For more information about parameter groups, see Parameter groups for Amazon Aurora.

If `rds.force_ssl` isn't set to 1 (on), query the `pg_stat_ssl` view to check connections using SSL. For example, the following query returns only SSL connections and information about the clients using SSL.

```
select datname, usename, ssl, client_addr from pg_stat_ssl inner join pg_stat_activity
 on pg_stat_ssl.pid = pg_stat_activity.pid where ssl is true and usename<>'rdsadmin';
```

Only rows using SSL/TLS connections are displayed with information about the connection. The following is sample output.

```
 datname  | usename | ssl | client_addr
----------+---------+-----+-------------
 benchdb  | pgadmin | t   | 53.95.6.13
 postgres | pgadmin | t   | 53.95.6.13
(2 rows)
```

The preceding query displays only the current connections at the time of the query. The absence of results doesn't indicate that no applications are using SSL connections. Other SSL connections might be established at a different time.

Determining whether a client requires certificate verification in order to connect

When a client, such as psql or JDBC, is configured with SSL support, the client first tries to connect to the database with SSL by default. If the client can't connect with SSL, it reverts to connecting without SSL. The default `sslmode` mode used for both libpq-based clients (such as psql) and JDBC is set to `prefer`. The certificate on the server is verified only when `sslrootcert` is provided with `sslmode` set to `verify-ca` or `verify-full`. An error is thrown if the certificate is invalid.

Use PGSSLROOTCERT to verify the certificate with the PGSSLMODE environment variable, with PGSSLMODE set to `verify-ca` or `verify-full`.

```
PGSSLMODE=verify-full PGSSLROOTCERT=/fullpath/ssl-cert.pem psql -h
 pgdbidentifier.cxxxxxxxx.us-east-2.rds.amazonaws.com -U primaryuser -d postgres
```

Use the `sslrootcert` argument to verify the certificate with `sslmode` in connection string format, with `sslmode` set to `verify-ca` or `verify-full`.

```
psql "host=pgdbidentifier.cxxxxxxxx.us-east-2.rds.amazonaws.com sslmode=verify-full
 sslrootcert=/full/path/ssl-cert.pem user=primaryuser dbname=postgres"
```

For example, in the preceding case, if you use an invalid root certificate, you see an error similar to the following on your client.

```
psql: SSL error: certificate verify failed
```

Updating your application trust store

For information about updating the trust store for PostgreSQL applications, see Secure TCP/IP connections with SSL in the PostgreSQL documentation.

> **Note**
>
> When you update the trust store, you can retain older certificates in addition to adding the new certificates.

Updating your application trust store for JDBC

You can update the trust store for applications that use JDBC for SSL/TLS connections.

For information about downloading the root certificate, see Using SSL/TLS to encrypt a connection to a DB cluster.

For sample scripts that import certificates, see Sample script for importing certificates into your trust store.

Using SSL/TLS connections for different types of applications

The following provides information about using SSL/TLS connections for different types of applications:

- **psql**

  The client is invoked from the command line by specifying options either as a connection string or as environment variables. For SSL/TLS connections, the relevant options are `sslmode` (environment variable `PGSSLMODE`), `sslrootcert` (environment variable `PGSSLROOTCERT`).

For the complete list of options, see Parameter key words in the PostgreSQL documentation. For the complete list of environment variables, see Environment variables in the PostgreSQL documentation.

- **pgAdmin**

  This browser-based client is a more user-friendly interface for connecting to a PostgreSQL database.

  For information about configuring connections, see the pgAdmin documentation.

- **JDBC**

  JDBC enables database connections with Java applications.

  For general information about connecting to a PostgreSQL database with JDBC, see Connecting to the database in the PostgreSQL documentation. For information about connecting with SSL/TLS, see Configuring the client in the PostgreSQL documentation.

- **Python**

  A popular Python library for connecting to PostgreSQL databases is `psycopg2`.

  For information about using `psycopg2`, see the psycopg2 documentation. For a short tutorial on how to connect to a PostgreSQL database, see Psycopg2 tutorial. You can find information about the options the connect command accepts in The psycopg2 module content.

> **Important**
>
> After you have determined that your database connections use SSL/TLS and have updated your application trust store, you can update your database to use the rds-ca-rsa2048-g1 certificates. For instructions, see step 3 in Updating your CA certificate by modifying your DB instance .

Using Kerberos authentication with Aurora PostgreSQL

You can use Kerberos to authenticate users when they connect to your DB cluster running PostgreSQL. To do so, configure your DB cluster to use Amazon Directory Service for Microsoft Active Directory for Kerberos authentication. Amazon Directory Service for Microsoft Active

Directory is also called Amazon Managed Microsoft AD. It's a feature available with Amazon Directory Service. To learn more, see What is Amazon Directory Service? in the *Amazon Directory Service Administration Guide*.

To start, create an Amazon Managed Microsoft AD directory to store user credentials. Then, provide to your PostgreSQL DB cluster the Active Directory's domain and other information. When users authenticate with the PostgreSQL DB cluster, authentication requests are forwarded to the Amazon Managed Microsoft AD directory.

Keeping all of your credentials in the same directory can save you time and effort. You have a centralized location for storing and managing credentials for multiple DB clusters. Using a directory can also improve your overall security profile.

In addition, you can access credentials from your own on-premises Microsoft Active Directory. To do so, create a trusting domain relationship so that the Amazon Managed Microsoft AD directory trusts your on-premises Microsoft Active Directory. In this way, your users can access your PostgreSQL clusters with the same Windows single sign-on (SSO) experience as when they access workloads in your on-premises network.

A database can use Kerberos, Amazon Identity and Access Management (IAM), or both Kerberos and IAM authentication. However, because Kerberos and IAM authentication provide different authentication methods, a specific database user can log in to a database using only one or the other authentication method but not both. For more information about IAM authentication, see IAM database authentication .

> **Note**
>
> RDS for PostgreSQL doesn't support Kerberos authentication for Active Directory groups.

Topics

- Region and version availability
- Overview of Kerberos authentication for PostgreSQL DB clusters
- Setting up Kerberos authentication for PostgreSQL DB clusters
- Managing an Aurora PostgreSQL DB cluster in an Active Directory domain
- Connecting to PostgreSQL with Kerberos authentication
- Considerations when using Kerberos authentication
- Using AD security groups for Aurora PostgreSQL access control

Region and version availability

Feature availability and support varies across specific versions of each database engine, and across Amazon Web Services Regions. For more information on version and Region availability of Aurora PostgreSQL with Kerberos authentication, see Kerberos authentication with Aurora PostgreSQL.

Overview of Kerberos authentication for PostgreSQL DB clusters

To set up Kerberos authentication for a PostgreSQL DB cluster, take the following steps, described in more detail later:

1. Use Amazon Managed Microsoft AD to create an Amazon Managed Microsoft AD directory. You can use the Amazon Web Services Management Console, the Amazon CLI, or the Amazon Directory Service API to create the directory. Make sure to open the relevant outbound ports on the directory security group so that the directory can communicate with the cluster.
2. Create a role that provides Amazon Aurora access to make calls to your Amazon Managed Microsoft AD directory. To do so, create an Amazon Identity and Access Management (IAM) role that uses the managed IAM policy `AmazonRDSDirectoryServiceAccess`.

   For the IAM role to allow access, the Amazon Security Token Service (Amazon STS) endpoint must be activated in the correct Amazon Region for your Amazon account. Amazon STS endpoints are active by default in all Amazon Web Services Regions, and you can use them without any further actions. For more information, see Activating and deactivating Amazon STS in an Amazon Region in the *IAM User Guide*.
3. Create and configure users in the Amazon Managed Microsoft AD directory using the Microsoft Active Directory tools. For more information about creating users in your Active Directory, see Manage users and groups in Amazon Managed Microsoft AD in the *Amazon Directory Service Administration Guide*.
4. If you plan to locate the directory and the DB instance in different Amazon accounts or virtual private clouds (VPCs), configure VPC peering. For more information, see What is VPC peering? in the *Amazon VPC Peering Guide*.
5. Create or modify a PostgreSQL DB cluster either from the console, CLI, or RDS API using one of the following methods:
   - Creating and connecting to an Aurora PostgreSQL DB cluster
   - Modifying an Amazon Aurora DB cluster
   - Restoring from a DB cluster snapshot

- Restoring a DB cluster to a specified time

You can locate the cluster in the same Amazon Virtual Private Cloud (VPC) as the directory or in a different Amazon account or VPC. When you create or modify the PostgreSQL DB cluster, do the following:

- Provide the domain identifier (`d-*` identifier) that was generated when you created your directory.
- Provide the name of the IAM role that you created.
- Ensure that the DB instance security group can receive inbound traffic from the directory security group.

6. Use the RDS master user credentials to connect to the PostgreSQL DB cluster. Create the user in PostgreSQL to be identified externally. Externally identified users can log in to the PostgreSQL DB cluster using Kerberos authentication.

Setting up Kerberos authentication for PostgreSQL DB clusters

You use Amazon Directory Service for Microsoft Active Directory (Amazon Managed Microsoft AD) to set up Kerberos authentication for a PostgreSQL DB cluster. To set up Kerberos authentication, take the following steps.

Topics

- Step 1: Create a directory using Amazon Managed Microsoft AD
- Step 2: (Optional) Create a trust relationship between your on-premises Active Directory and Amazon Directory Service
- Step 3: Create an IAM role for Amazon Aurora to access the Amazon Directory Service
- Step 4: Create and configure users
- Step 5: Enable cross-VPC traffic between the directory and the DB instance
- Step 6: Create or modify a PostgreSQL DB cluster
- Step 7: Create PostgreSQL users for your Kerberos principals
- Step 8: Configure a PostgreSQL client

Step 1: Create a directory using Amazon Managed Microsoft AD

Amazon Directory Service creates a fully managed Active Directory in the Amazon Cloud. When you create an Amazon Managed Microsoft AD directory, Amazon Directory Service creates two domain controllers and DNS servers for you. The directory servers are created in different subnets in a VPC. This redundancy helps make sure that your directory remains accessible even if a failure occurs.

When you create an Amazon Managed Microsoft AD directory, Amazon Directory Service performs the following tasks on your behalf:

- Sets up an Active Directory within your VPC.
- Creates a directory administrator account with the user name `Admin` and the specified password. You use this account to manage your directory.

  > **Important**
  >
  > Make sure to save this password. Amazon Directory Service doesn't store this password, and it can't be retrieved or reset.

- Creates a security group for the directory controllers. The security group must permit communication with the PostgreSQL DB cluster.

When you launch Amazon Directory Service for Microsoft Active Directory, Amazon creates an Organizational Unit (OU) that contains all of your directory's objects. This OU, which has the NetBIOS name that you entered when you created your directory, is located in the domain root. The domain root is owned and managed by Amazon.

The `Admin` account that was created with your Amazon Managed Microsoft AD directory has permissions for the most common administrative activities for your OU:

- Create, update, or delete users
- Add resources to your domain such as file or print servers, and then assign permissions for those resources to users in your OU
- Create additional OUs and containers
- Delegate authority
- Restore deleted objects from the Active Directory Recycle Bin

- Run Active Directory and Domain Name Service (DNS) modules for Windows PowerShell on the Active Directory Web Service

The `Admin` account also has rights to perform the following domain-wide activities:

- Manage DNS configurations (add, remove, or update records, zones, and forwarders)
- View DNS event logs
- View security event logs

To create a directory with Amazon Managed Microsoft AD

1. In the Amazon Directory Service console navigation pane, choose **Directories**, and then choose **Set up directory**.
2. Choose **Amazon Managed Microsoft AD**. Amazon Managed Microsoft AD is the only option currently supported for use with Amazon Aurora.
3. Choose **Next**.
4. On the **Enter directory information** page, provide the following information:

   Edition

   Choose the edition that meets your requirements.

   Directory DNS name

   The fully qualified name for the directory, such as **`corp.example.com`**.

   Directory NetBIOS name

   An optional short name for the directory, such as `CORP`.

   Directory description

   An optional description for the directory.

   Admin password

   The password for the directory administrator. The directory creation process creates an administrator account with the user name `Admin` and this password.

The directory administrator password can't include the word "admin." The password is case-sensitive and must be 8–64 characters in length. It must also contain at least one character from three of the following four categories:

- Lowercase letters (a–z)
- Uppercase letters (A–Z)
- Numbers (0–9)
- Nonalphanumeric characters (~!@#$%^&*_-+=`|\(){}[]:;"'<>,.?/)

Confirm password

Retype the administrator password.

> **Important**
>
> Make sure that you save this password. Amazon Directory Service doesn't store this password, and it can't be retrieved or reset.


5. Choose **Next**.
6. On the **Choose VPC and subnets** page, provide the following information:

   VPC

   Choose the VPC for the directory. You can create the PostgreSQL DB cluster in this same VPC or in a different VPC.


   Subnets

   Choose the subnets for the directory servers. The two subnets must be in different Availability Zones.
7. Choose **Next**.
8. Review the directory information. If changes are needed, choose **Previous** and make the changes. When the information is correct, choose **Create directory**.

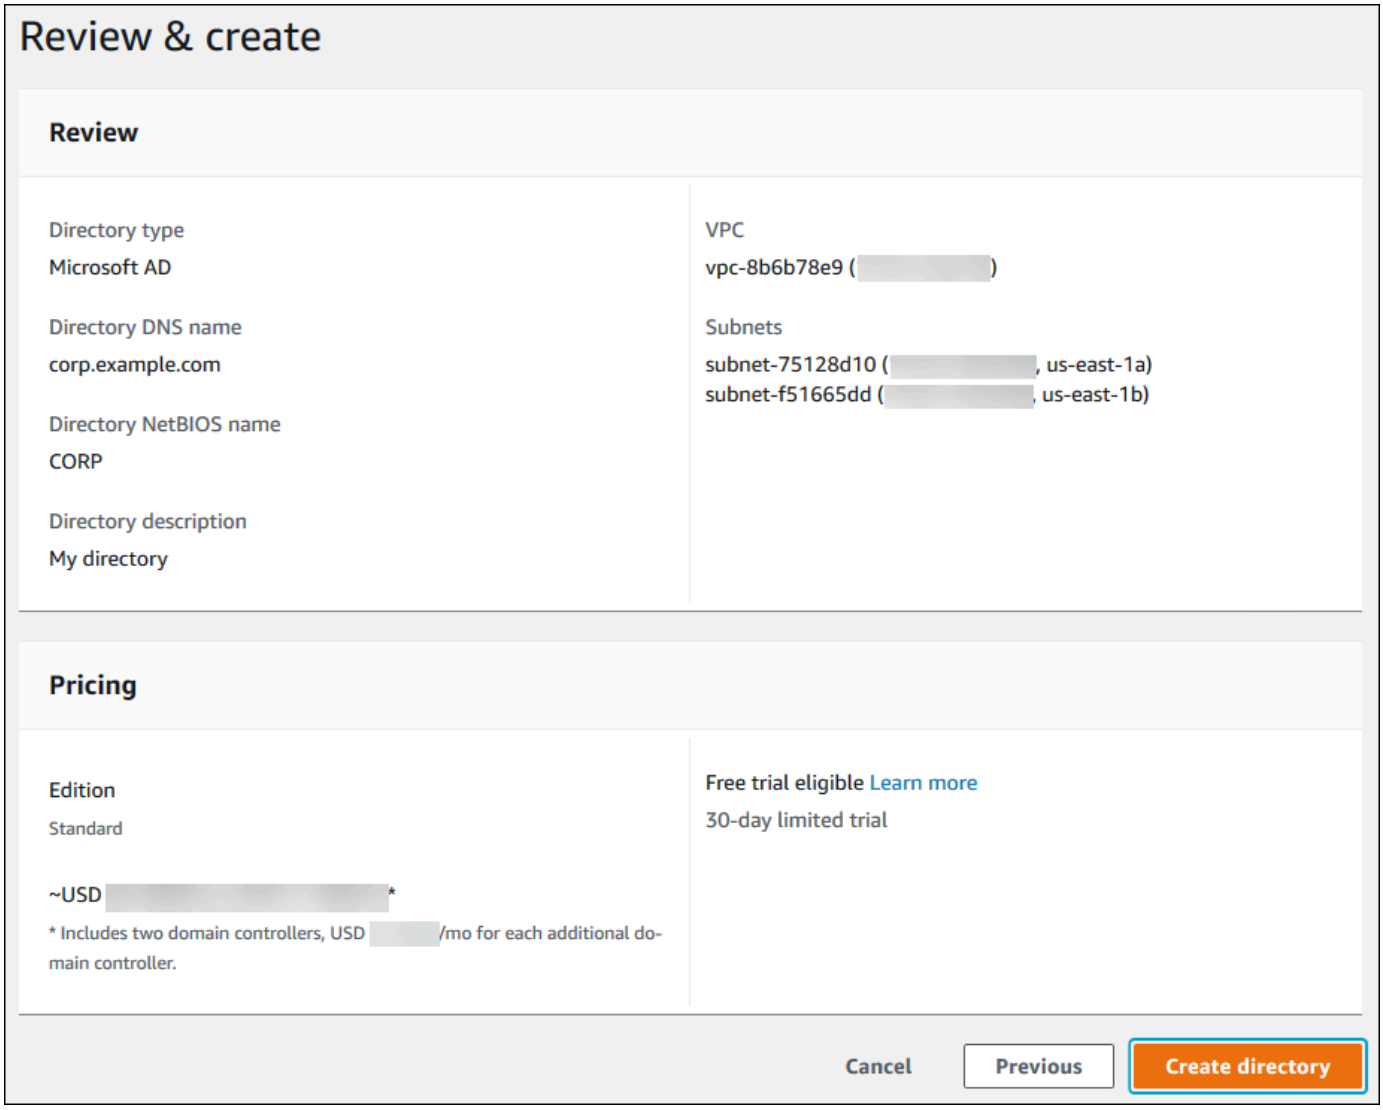

It takes several minutes for the directory to be created. When it has been successfully created, the **Status** value changes to **Active**.

To see information about your directory, choose the directory ID in the directory listing. Make a note of the **Directory ID** value. You need this value when you create or modify your PostgreSQL DB instance.

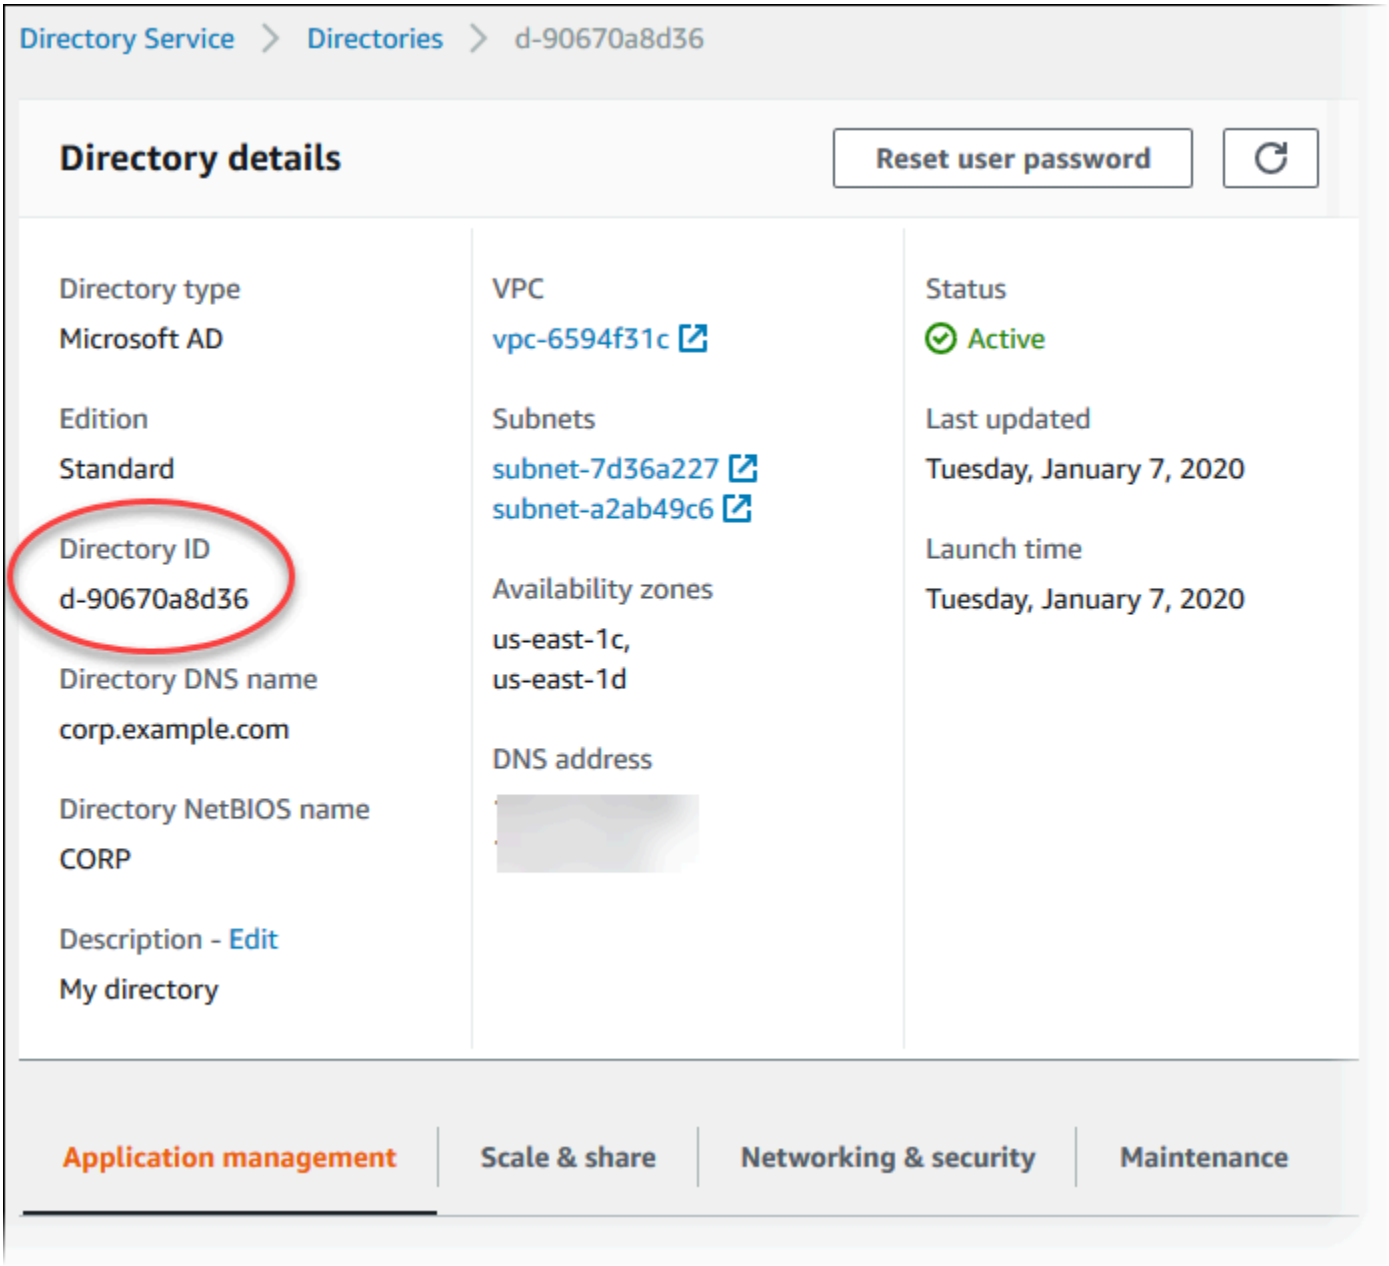

Step 2: (Optional) Create a trust relationship between your on-premises Active Directory and Amazon Directory Service

If you don't plan to use your own on-premises Microsoft Active Directory, skip to Step 3: Create an IAM role for Amazon Aurora to access the Amazon Directory Service.

To get Kerberos authentication using your on-premises Active Directory, you need to create a trusting domain relationship using a forest trust between your on-premises Microsoft Active Directory and the Amazon Managed Microsoft AD directory (created in Step 1: Create a directory using Amazon Managed Microsoft AD). The trust can be one-way, where the Amazon Managed


Microsoft AD directory trusts the on-premises Microsoft Active Directory. The trust can also be two-way, where both Active Directories trust each other. For more information about setting up trusts using Amazon Directory Service, see When to create a trust relationship in the *Amazon Directory Service Administration Guide*.

Note

If you use an on-premises Microsoft Active Directory:

- Windows clients must connect using the domain name of the Amazon Directory Service in the endpoint rather than rds.amazonaws.com. For more information, see Connecting to PostgreSQL with Kerberos authentication.
- Windows clients can't connect using Aurora custom endpoints. To learn more, see Amazon Aurora endpoint connections.
- For global databases:
  - Windows clients can connect using instance endpoints or cluster endpoints in the primary Amazon Web Services Region of the global database only.
  - Windows clients can't connect using cluster endpoints in secondary Amazon Web Services Regions.

Make sure that your on-premises Microsoft Active Directory domain name includes a DNS suffix routing that corresponds to the newly created trust relationship. The following screenshot shows an example.

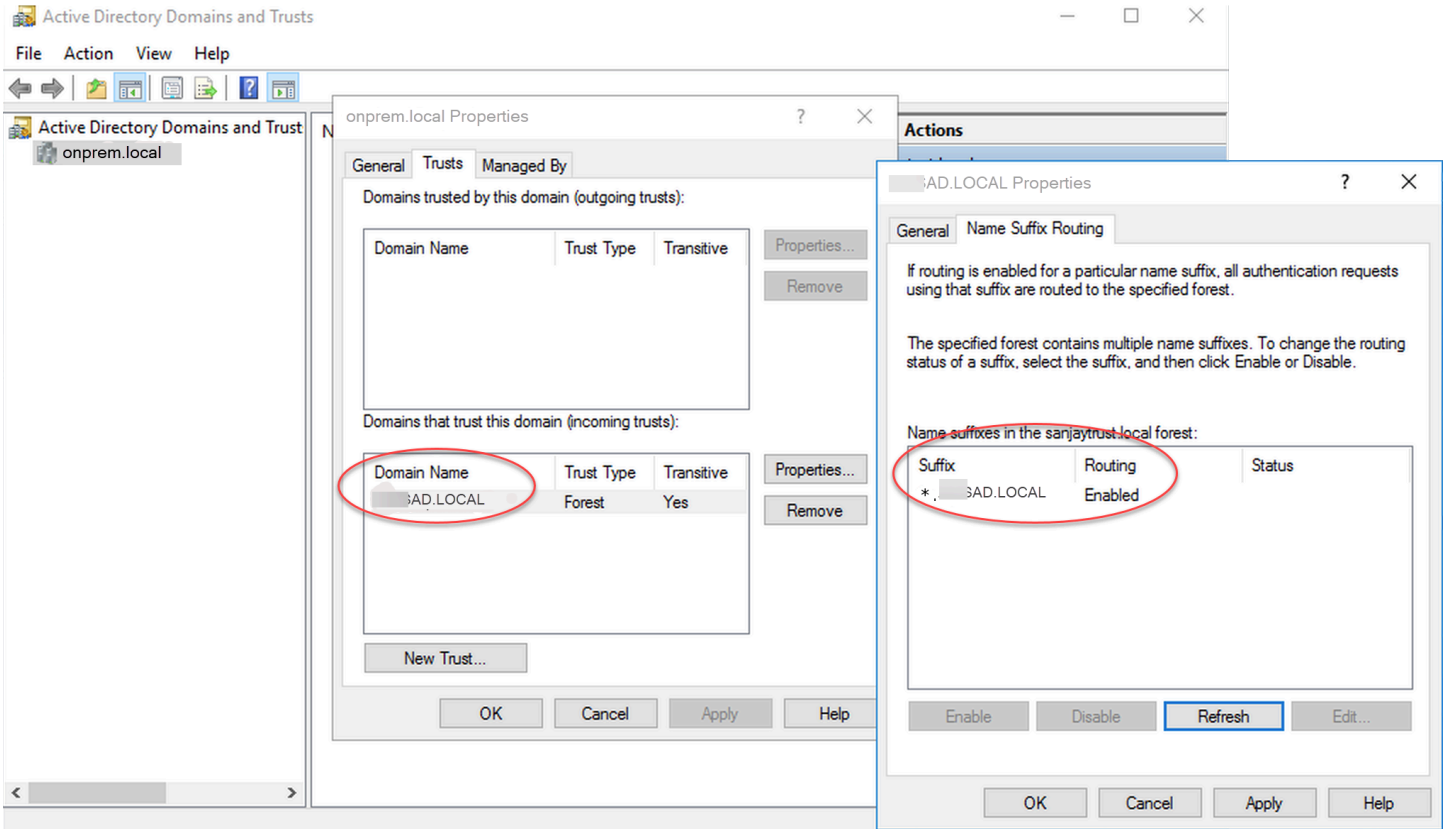

Step 3: Create an IAM role for Amazon Aurora to access the Amazon Directory Service

For Amazon Aurora to call Amazon Directory Service for you, your Amazon account needs an IAM role that uses the managed IAM policy `AmazonRDSDirectoryServiceAccess`. This role allows Amazon Aurora to make calls to Amazon Directory Service. (Note that this IAM role to access the Amazon Directory Service is different than the IAM role used for IAM database authentication .)

When you create a DB instance using the Amazon Web Services Management Console and your console user account has the `iam:CreateRole` permission, the console creates the needed IAM role automatically. In this case, the role name is `rds-directoryservice-kerberos-access-role`. Otherwise, you must create the IAM role manually. When you create this IAM role, choose `Directory Service`, and attach the Amazon managed policy `AmazonRDSDirectoryServiceAccess` to it.

For more information about creating IAM roles for a service, see Creating a role to delegate permissions to an Amazon service in the *IAM User Guide*.

> **Note**
>
> The IAM role used for Windows Authentication for RDS for Microsoft SQL Server can't be used for Amazon Aurora.

As an alternative to using the `AmazonRDSDirectoryServiceAccess` managed policy, you can create policies with the required permissions. In this case, the IAM role must have the following IAM trust policy.

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": [
          "directoryservice.rds.amazonaws.com",
          "rds.amazonaws.com"
        ]
      },
      "Action": "sts:AssumeRole"
    }
  ]
}
```

The role must also have the following IAM role policy.

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Action": [
        "ds:DescribeDirectories",
```

```
        "ds:AuthorizeApplication",
        "ds:UnauthorizeApplication",
        "ds:GetAuthorizedApplicationDetails"
      ],
    "Effect": "Allow",
    "Resource": "*"
    }
  ]
}
```

For opt-in Amazon Web Services Regions, use Region-specific service principals in IAM role trust policies. When you create a trust policy for services in these Regions, specify the Region code in the service principal.

The following example shows a trust policy that includes Region-specific service principals:

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {
        "Service": [
          "directoryservice.rds.REGION-CODE.amazonaws.com",
          "rds.REGION-CODE.amazonaws.com"
        ]
      },
      "Action": "sts:AssumeRole"
    }
  ]
}
```

Replace REGION-CODE with the code for your specific Region. For example, use the following service principals for the Asia Pacific (Melbourne) Region:

```
"Service": [
  "directoryservice.rds.ap-southeast-4.amazonaws.com",
  "rds.ap-southeast-4.amazonaws.com"
]
```

For Amazon Web Services Regions launched after Israel (Tel Aviv), starting with Canada West (Calgary), use the engine-specific service principal `directoryservice-`*`engine`*`.rds.`*`region-code`*`.amazonaws.com`, where *`engine`* is `aurora-postgresql`. For example, for Canada West (Calgary) Region:

```
"Service": [
  "directoryservice-aurora-postgresql.rds.ca-west-1.amazonaws.com",
  "rds.ca-west-1.amazonaws.com"
]
```

Step 4: Create and configure users

You can create users by using the Active Directory Users and Computers tool. This is one of the Active Directory Domain Services and Active Directory Lightweight Directory Services tools. For more information, see Add Users and Computers to the Active Directory domain in the Microsoft documentation. In this case, users are individuals or other entities, such as their computers that are part of the domain and whose identities are being maintained in the directory.

To create users in an Amazon Directory Service directory, you must be connected to a Windows-based Amazon EC2 instance that's a member of the Amazon Directory Service directory. At the same time, you must be logged in as a user that has privileges to create users. For more information, see Create a user in the *Amazon Directory Service Administration Guide*.

Step 5: Enable cross-VPC traffic between the directory and the DB instance

If you plan to locate the directory and the DB cluster in the same VPC, skip this step and move on to Step 6: Create or modify a PostgreSQL DB cluster.

If you plan to locate the directory and the DB instance in different VPCs, configure cross-VPC traffic using VPC peering or Amazon Transit Gateway.

The following procedure enables traffic between VPCs using VPC peering. Follow the instructions in What is VPC peering? in the *Amazon Virtual Private Cloud Peering Guide*.

To enable cross-VPC traffic using VPC peering

1. Set up appropriate VPC routing rules to ensure that network traffic can flow both ways.
2. Ensure that the DB instance security group can receive inbound traffic from the directory security group.
3. Ensure that there is no network access control list (ACL) rule to block traffic.

If a different Amazon account owns the directory, you must share the directory.

To share the directory between Amazon accounts

1. Start sharing the directory with the Amazon account that the DB instance will be created in by following the instructions in Tutorial: Sharing your Amazon Managed Microsoft AD directory for seamless EC2 Domain-join in the *Amazon Directory Service Administration Guide*.
2. Sign in to the Amazon Directory Service console using the account for the DB instance, and ensure that the domain has the SHARED status before proceeding.
3. While signed into the Amazon Directory Service console using the account for the DB instance, note the **Directory ID** value. You use this directory ID to join the DB instance to the domain.

Step 6: Create or modify a PostgreSQL DB cluster

Create or modify a PostgreSQL DB cluster for use with your directory. You can use the console, CLI, or RDS API to associate a DB cluster with a directory. You can do this in one of the following ways:


- Create a new PostgreSQL DB cluster using the console, the create-db-cluster CLI command, or the CreateDBCluster RDS API operation. For instructions, see Creating and connecting to an Aurora PostgreSQL DB cluster.
- Modify an existing PostgreSQL DB cluster using the console, the modify-db-cluster CLI command, or the ModifyDBCluster RDS API operation. For instructions, see Modifying an Amazon Aurora DB cluster.
- Restore a PostgreSQL DB cluster from a DB snapshot using the console, the restore-db-cluster-from-db-snapshot CLI command, or the RestoreDBClusterFromDBSnapshot RDS API operation. For instructions, see Restoring from a DB cluster snapshot.
- Restore a PostgreSQL DB cluster to a point-in-time using the console, the restore-db-instance-to-point-in-time CLI command, or the RestoreDBClusterToPointInTime RDS API operation. For instructions, see Restoring a DB cluster to a specified time.

Kerberos authentication is only supported for PostgreSQL DB clusters in a VPC. The DB cluster can be in the same VPC as the directory, or in a different VPC. The DB cluster must use a security group that allows ingress and egress within the directory's VPC so the DB cluster can communicate with the directory.

> **Note**
>
> Enabling Kerberos authentication isn't currently supported on Aurora PostgreSQL DB cluster during migration from RDS for PostgreSQL. You can enable Kerberos authentication only on a standalone Aurora PostgreSQL DB cluster.

Console

When you use the console to create, modify, or restore a DB cluster, choose **Kerberos authentication** in the **Database authentication** section. Then choose **Browse Directory**. Select the directory or choose **Create a new directory** to use the Directory Service.

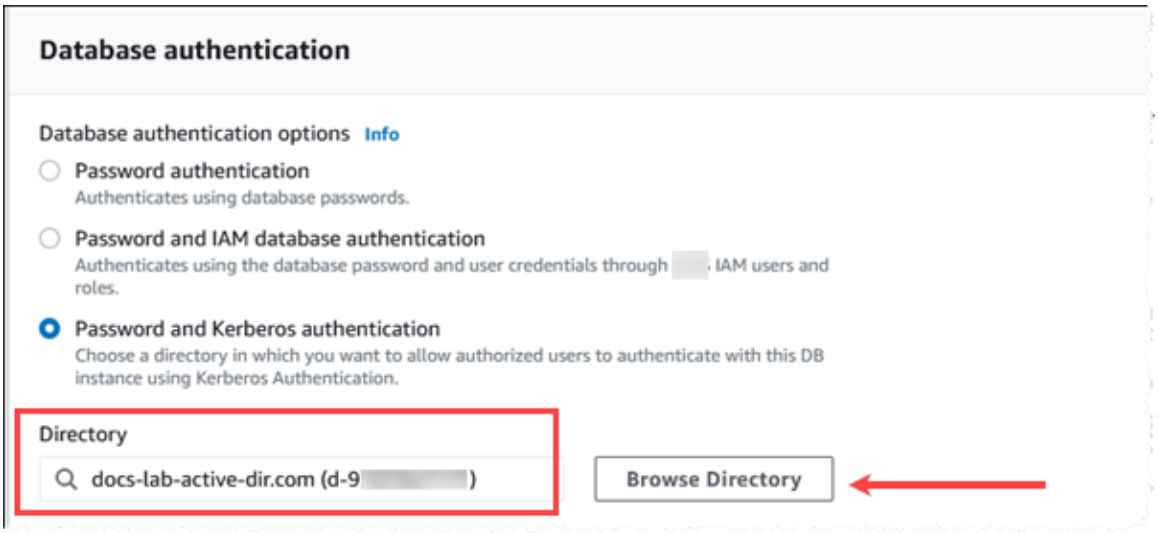

Amazon CLI

When you use the Amazon CLI, the following parameters are required for the DB cluster to be able to use the directory that you created:

- For the `--domain` parameter, use the domain identifier ("d-*" identifier) generated when you created the directory.
- For the `--domain-iam-role-name` parameter, use the role you created that uses the managed IAM policy `AmazonRDSDirectoryServiceAccess`.

For example, the following CLI command modifies a DB cluster to use a directory.

```
aws rds  modify-db-cluster --db-cluster-identifier mydbinstance --domain d-Directory-ID
 --domain-iam-role-name role-name
```

> **Important**
>
> If you modify a DB cluster to enable Kerberos authentication, reboot the DB cluster after making the change.

Step 7: Create PostgreSQL users for your Kerberos principals

At this point, your Aurora PostgreSQL DB cluster is joined to the Amazon Managed Microsoft AD domain. The users that you created in the directory in Step 4: Create and configure users need to be set up as PostgreSQL database users and granted privileges to login to the database. You do that by signing in as the database user with `rds_superuser` privileges. For example, if you accepted the defaults when you created your Aurora PostgreSQL DB cluster, you use `postgres`, as shown in the following steps.

To create PostgreSQL database users for Kerberos principals

1. Use `psql` to connect to your Aurora PostgreSQL DB cluster's DB instance endpoint using `psql`. The following example uses the default `postgres` account for the `rds_superuser` role.

   ```
   psql --host=cluster-instance-1.111122223333.aws-region.rds.amazonaws.com --
   port=5432 --username=postgres --password
   ```

2. Create a database user name for each Kerberos principal (Active Directory username) that you want to have access to the database. Use the canonical username (identity) as defined in the Active Directory instance, that is, a lower-case `alias` (username in Active Directory) and the upper-case name of the Active Directory domain for that user name. The Active Directory user name is an externally authenticated user, so use quotes around the name as shown following.

   ```
   postgres=> CREATE USER "username@CORP.EXAMPLE.COM" WITH LOGIN;
   CREATE ROLE
   ```

3. Grant the `rds_ad` role to the database user.

```
postgres=> GRANT rds_ad TO "username@CORP.EXAMPLE.COM";
GRANT ROLE
```

After you finish creating all the PostgreSQL users for your Active Directory user identities, users can access the Aurora PostgreSQL DB cluster by using their Kerberos credentials.

It's required that the database users who authenticate using Kerberos are doing so from client machines that are members of the Active Directory domain.

Database users that have been granted the `rds_ad` role can't also have the `rds_iam` role. This also applies to nested memberships. For more information, see IAM database authentication .

Configuring your Aurora PostgreSQL DB cluster for case-insensitive user names

Aurora PostgreSQL versions 14.5, 13.8, 12.12, and 11.17 support the `krb_caseins_users` PostgreSQL parameter. This parameter supports case-insensitive Active Directory user names. By default, this parameter is set to false, so user names are interpreted case-sensitively by Aurora PostgreSQL. That's the default behavior in all older versions of Aurora PostgreSQL. However, you can set this parameter to `true` in your custom DB cluster parameter group and allow your Aurora PostgreSQL DB cluster to interpret user names, case-insensitively. Consider doing this as a convenience for your database users, who might sometimes mis-type the casing of their user name when authenticating using Active Directory.

To change the `krb_caseins_users` parameter, your Aurora PostgreSQL DB cluster must be using a custom DB cluster parameter group. For information about working with a custom DB cluster parameter group, see Parameter groups for Amazon Aurora.

You can use the Amazon CLI or the Amazon Web Services Management Console to change the setting. For more information, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

Step 8: Configure a PostgreSQL client

To configure a PostgreSQL client, take the following steps:

- Create a krb5.conf file (or equivalent) to point to the domain.
- Verify that traffic can flow between the client host and Amazon Directory Service. Use a network utility such as Netcat for the following:

- Verify traffic over DNS for port 53.
- Verify traffic over TCP/UDP for port 53 and for Kerberos, which includes ports 88 and 464 for Amazon Directory Service.

- Verify that traffic can flow between the client host and the DB instance over the database port. For example, use psql to connect and access the database.

The following is sample krb5.conf content for Amazon Managed Microsoft AD.

```
[libdefaults]
 default_realm = EXAMPLE.COM
[realms]
 EXAMPLE.COM = {
  kdc = example.com
  admin_server = example.com
 }
[domain_realm]
 .example.com = EXAMPLE.COM
 example.com = EXAMPLE.COM
```

The following is sample krb5.conf content for an on-premises Microsoft Active Directory.

```
[libdefaults]
 default_realm = EXAMPLE.COM
[realms]
 EXAMPLE.COM = {
  kdc = example.com
  admin_server = example.com
 }
 ONPREM.COM = {
  kdc = onprem.com
  admin_server = onprem.com
 }
[domain_realm]
 .example.com = EXAMPLE.COM
 example.com = EXAMPLE.COM
 .onprem.com = ONPREM.COM
 onprem.com = ONPREM.COM
 .rds.amazonaws.com = EXAMPLE.COM
 .amazonaws.com.cn = EXAMPLE.COM
 .amazon.com = EXAMPLE.COM
```

Managing an Aurora PostgreSQL DB cluster in an Active Directory domain

You can use the console, the CLI, or the RDS API to manage your DB cluster and its relationship with your Microsoft Active Directory. For example, you can associate an Active Directory to enable Kerberos authentication. You can also remove the association for an Active Directory to disable Kerberos authentication. You can also move a DB cluster to be externally authenticated by one Microsoft Active Directory to another.

For example, using the CLI, you can do the following:

- To reattempt enabling Kerberos authentication for a failed membership, use the modify-db-cluster CLI command. Specify the current membership's directory ID for the `--domain` option.
- To disable Kerberos authentication on a DB instance, use the modify-db-cluster CLI command. Specify `none` for the `--domain` option.
- To move a DB instance from one domain to another, use the modify-db-cluster CLI command. Specify the domain identifier of the new domain for the `--domain` option.

Understanding Domain membership

After you create or modify your DB cluster, the DB instances become members of the domain. You can view the status of the domain membership in the console or by running the describe-db-instances CLI command. The status of the DB instance can be one of the following:

- `kerberos-enabled` – The DB instance has Kerberos authentication enabled.
- `enabling-kerberos` – Amazon is in the process of enabling Kerberos authentication on this DB instance.
- `pending-enable-kerberos` – Enabling Kerberos authentication is pending on this DB instance.
- `pending-maintenance-enable-kerberos` – Amazon will attempt to enable Kerberos authentication on the DB instance during the next scheduled maintenance window.
- `pending-disable-kerberos` – Disabling Kerberos authentication is pending on this DB instance.
- `pending-maintenance-disable-kerberos` – Amazon will attempt to disable Kerberos authentication on the DB instance during the next scheduled maintenance window.

- `enable-kerberos-failed` – A configuration problem prevented Amazon from enabling Kerberos authentication on the DB instance. Correct the configuration problem before reissuing the command to modify the DB instance.
- `disabling-kerberos` – Amazon is in the process of disabling Kerberos authentication on this DB instance.

A request to enable Kerberos authentication can fail because of a network connectivity issue or an incorrect IAM role. In some cases, the attempt to enable Kerberos authentication might fail when you create or modify a DB cluster. If so, make sure that you are using the correct IAM role, then modify the DB cluster to join the domain.

Connecting to PostgreSQL with Kerberos authentication

You can connect to PostgreSQL with Kerberos authentication with the pgAdmin interface or with a command-line interface such as psql. For more information about connecting, see Connecting to an Amazon Aurora PostgreSQL DB cluster. For information about obtaining the endpoint, port number, and other details needed for connection, see Viewing the endpoints for an Aurora cluster.

> **Note**
>
> GSSAPI authentication and encryption in PostgreSQL are implemented by the Kerberos library `libkrb5.so`. Features such as `postgres_fdw` and `dblink` also rely on this same library for outbound connections with Kerberos authentication or encryption.

pgAdmin

To use pgAdmin to connect to PostgreSQL with Kerberos authentication, take the following steps:

1. Launch the pgAdmin application on your client computer.
2. On the **Dashboard** tab, choose **Add New Server**.
3. In the **Create - Server** dialog box, enter a name on the **General** tab to identify the server in pgAdmin.
4. On the **Connection** tab, enter the following information from your Aurora PostgreSQL database.
   - For **Host**, enter the endpoint for the Writer instance of your Aurora PostgreSQL DB cluster. An endpoint looks similar to the following:

```
AUR-cluster-instance.111122223333.aws-region.rds.amazonaws.com
```

To connect to an on-premises Microsoft Active Directory from a Windows client, you use the domain name of the Amazon Managed Active Directory instead of `rds.amazonaws.com` in the host endpoint. For example, suppose that the domain name for the Amazon Managed Active Directory is `corp.example.com`. Then for **Host**, the endpoint would be specified as follows:

```
AUR-cluster-instance.111122223333.aws-region.corp.example.com
```

- For **Port**, enter the assigned port.
- For **Maintenance database**, enter the name of the initial database to which the client will connect.
- For **Username**, enter the user name that you entered for Kerberos authentication in Step 7: Create PostgreSQL users for your Kerberos principals.

5. Choose **Save**.

Psql

To use psql to connect to PostgreSQL with Kerberos authentication, take the following steps:

1. At a command prompt, run the following command.

```
kinit username
```

Replace *username* with the user name. At the prompt, enter the password stored in the Microsoft Active Directory for the user.

2. If the PostgreSQL DB cluster is using a publicly accessible VPC, put IP address for your DB cluster endpoint in your `/etc/hosts` file on the EC2 client. For example, the following commands obtain the IP address and then put it in the `/etc/hosts` file.

```
% dig +short PostgreSQL-endpoint.Amazon-Region.rds.amazonaws.com
;; Truncated, retrying in TCP mode.
ec2-34-210-197-118.Amazon-Region.compute.amazonaws.com.
34.210.197.118
```

```
% echo " 34.210.197.118  PostgreSQL-endpoint.Amazon-Region.rds.amazonaws.com" >> /
etc/hosts
```

If you're using an on-premises Microsoft Active Directory from a Windows client, then you need to connect using a specialized endpoint. Instead of using the Amazon domain `rds.amazonaws.com` in the host endpoint, use the domain name of the Amazon Managed Active Directory.

For example, suppose that the domain name for your Amazon Managed Active Directory is `corp.example.com`. Then use the format *`PostgreSQL-endpoint.Amazon-Region.corp.example.com`* for the endpoint and put it in the `/etc/hosts` file.

```
% echo " 34.210.197.118  PostgreSQL-endpoint.Amazon-Region.corp.example.com" >> /etc/
hosts
```

3. Use the following psql command to log in to a PostgreSQL DB cluster that is integrated with Active Directory. Use a cluster or instance endpoint.

```
psql -U username@CORP.EXAMPLE.COM -p 5432 -h PostgreSQL-endpoint.Amazon-
Region.rds.amazonaws.com postgres
```

To log in to the PostgreSQL DB cluster from a Windows client using an on-premises Active Directory, use the following psql command with the domain name from the previous step (`corp.example.com`):

```
psql -U username@CORP.EXAMPLE.COM -p 5432 -h PostgreSQL-endpoint.Amazon-
Region.corp.example.com postgres
```

Considerations when using Kerberos authentication

The following considerations apply when using Kerberos authentication with your DB cluster:

- **DNS resolution with Kerberos authentication when using Amazon service integration**

  Enabling Kerberos authentication on your DB cluster changes DNS resolution behavior, which can affect integration with Amazon services such as Lambda.

When you enable Kerberos authentication, your DB cluster prioritizes Amazon Managed Microsoft AD DNS servers over Amazon DNS resolvers. If your Amazon Managed Microsoft AD DNS contains endpoint records for Amazon services (such as Lambda VPC endpoints), your database may resolve these services to IP addresses in your Active Directory VPC rather than your database VPC. This configuration prevents successful connections from your DB cluster to these Amazon services.

> **Note**
>
> This limitation applies only if you have Amazon service VPC endpoints configured in your Amazon Managed Microsoft AD VPC.

Using AD security groups for Aurora PostgreSQL access control

From Aurora PostgreSQL 14.10 and 15.5 versions, Aurora PostgreSQL access control can be managed using Amazon Directory Service for Microsoft Active Directory (AD) security groups. Earlier versions of Aurora PostgreSQL support Kerberos based authentication with AD only for individual users. Each AD user had to be explicitly provisioned to DB cluster to get access.

Instead of explicitly provisioning each AD user to DB cluster based on business needs, you can leverage AD security groups as explained below:

- AD users are members of various AD security groups in an Active Directory. These are not dictated by DB cluster administrator, but are based on business requirements, and are handled by an AD administrator.
- DB cluster administrators create DB roles in DB instances based on business requirements. These DB roles may have different permissions or privileges.
- DB cluster administrators configure a mapping from AD security groups to DB roles on a per DB cluster basis.
- DB users can access DB clusters using their AD credentials. Access is based on AD security group membership. AD users gain or lose access automatically based on their AD group memberships.

Prerequisites

Ensure that you have the following before setting up the extension for AD Security groups:

- Set up Kerberos authentication for PostgreSQL DB clusters. For more information, see Setting up Kerberos authentication for PostgreSQL DB clusters.

> **Note**
>
> For AD security groups, skip Step 7: Create PostgreSQL users for your Kerberos principals in this setup procedure.

> **Important**
>
> If you enable AD security groups on an Aurora PostgreSQL cluster that already has Kerberos authentication enabled, you might encounter authentication issues. This occurs

when you add `pg_ad_mapping` to the `shared_preload_libraries` parameter and restart your database. When using cluster endpoints, login attempts using an AD user that isn't a database user with the `rds_ad` role can fail. This can also potentially cause engine crashes. To resolve this issue, disable and then re-enable Kerberos authentication on your cluster. This workaround is required for existing instances but doesn't affect instances created after April 2025.

- Managing a DB cluster in a Domain. For more information, see Managing a DB cluster in a Domain.

Setting up the pg_ad_mapping extension

Aurora PostgreSQL is now providing `pg_ad_mapping` extension to manage the mapping between AD security groups and DB roles in Aurora PostgreSQL cluster. For more information about the functions provided by `pg_ad_mapping`, see Using functions from the `pg_ad_mapping` extension.

To set up the `pg_ad_mapping` extension on your Aurora PostgreSQL DB cluster, you first add `pg_ad_mapping` to the shared libraries on the custom DB cluster parameter group for your Aurora PostgreSQL DB cluster. For information about creating a custom DB cluster parameter group, see Parameter groups for Amazon Aurora. Next, you install the `pg_ad_mapping` extension. The procedures in this section show you how. You can use the Amazon Web Services Management Console or the Amazon CLI.

You must have permissions as the `rds_superuser` role to perform all these tasks.


The steps following assume that your Aurora PostgreSQL DB cluster is associated with a custom DB cluster parameter group.

Console

To set up the `pg_ad_mapping` extension

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose your Aurora PostgreSQL DB cluster's Writer instance.
3. Open the **Configuration** tab for your Aurora PostgreSQL DB cluster writer instance. Among the Instance details, find the **Parameter group** link.

4. Choose the link to open the custom parameters associated with your Aurora PostgreSQL DB cluster.
5. Choose **Edit** to access the parameter values.
6. In the **Filter parameters** search field, enter `shared_preload_libraries` to find the parameter.
7. Add `pg_ad_mapping` to the list in the **Values** field. Use a comma to separate items in the list of values. Then choose **Save changes**.

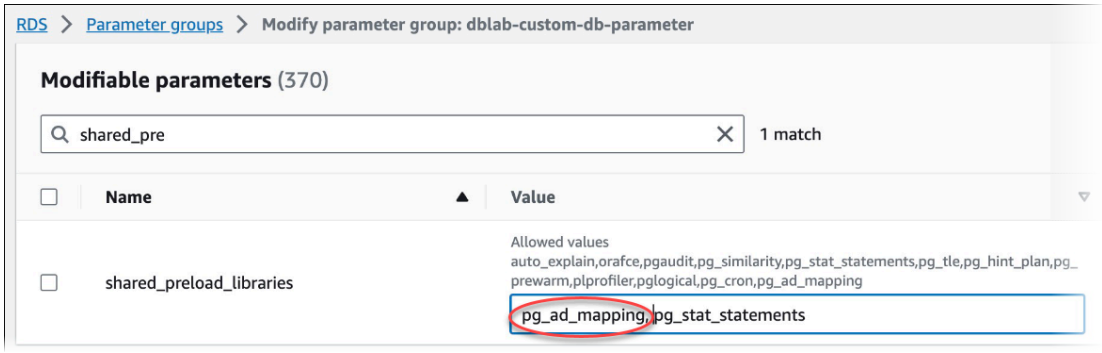

8. Reboot the writer instance of your Aurora PostgreSQL DB cluster so that your change to the `shared_preload_libraries` parameter takes effect.
9. When the instance is available, verify that `pg_ad_mapping` has been initialized. Use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster, and then run the following command.

```
SHOW shared_preload_libraries;
shared_preload_libraries
--------------------------
rdsutils,pg_ad_mapping
(1 row)
```

10. With `pg_ad_mapping` initialized, you can now create the extension. You need to create the extension after initializing the library to start using the functions provided by this extension.

```
CREATE EXTENSION pg_ad_mapping;
```

11. Close the `psql` session.

```
labdb=> \q
```

Amazon CLI

To setup pg_ad_mapping

To setup pg_ad_mapping using the Amazon CLI, you call the modify-db-parameter-group operation to add this parameter in your custom parameter group, as shown in the following procedure.

1. Use the following Amazon CLI command to add `pg_ad_mapping` to the `shared_preload_libraries` parameter.

```
aws rds modify-db-parameter-group \
   --db-parameter-group-name custom-param-group-name \
   --parameters
 "ParameterName=shared_preload_libraries,ParameterValue=pg_ad_mapping,ApplyMethod=pending-
reboot" \
   --region aws-region
```

2. Use the following Amazon CLI command to reboot the writer instance of your Aurora PostgreSQL DB cluster so that the pg_ad_mapping is initialized.

```
aws rds reboot-db-instance \
    --db-instance-identifier writer-instance \
    --region aws-region
```

3. When the instance is available, you can verify that `pg_ad_mapping` has been initialized. Use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster, and then run the following command.

```
SHOW shared_preload_libraries;
shared_preload_libraries
--------------------------
rdsutils,pg_ad_mapping
(1 row)
```

   With pg_ad_mapping initialized, you can now create the extension.

```
CREATE EXTENSION pg_ad_mapping;
```

4. Close the `psql` session so that you can use the Amazon CLI.

```
labdb=> \q
```

Retrieving Active Directory Group SID in PowerShell

A security identifier (SID) is used to uniquely identify a security principal or security group. Whenever a security group or account is created in Active Directory a SID is assigned to it. To fetch the AD security group SID from the active directory, you can use the Get-ADGroup cmdlet from windows client machine which is joined with that Active Directory domain. The Identity parameter specifies the Active Directory group name to get the corresponding SID.

The following example returns the SID of AD group *adgroup1*.

```
C:\Users\Admin> Get-ADGroup -Identity adgroup1 | select SID

             SID
-----------------------------------------------
S-1-5-21-3168537779-1985441202-1799118680-1612
```

Mapping DB role with AD security group

You need to explicitly provision the AD security groups in the database as a PostgreSQL DB role. An AD user, who is part of at least one provisioned AD security group will get access to the database. You shouldn't grant `rds_ad role` to AD group security based DB role. Kerberos authentication for security group will get triggered by using the domain name suffix like *user1@example.com*. This DB role can't use Password or IAM authentication to gain access to database.

> **Note**
>
> AD users who have a corresponding DB role in the database with `rds_ad` role granted to them, can't login as part of the AD security group. They will get access through DB role as an individual user.

For example, accounts-group is a security group in AD where you would like to provision this security group in the Aurora PostgreSQL as accounts-role.

AD Security Group	PosgreSQL DB role
accounts-group	accounts-role

When mapping the DB role with the AD security group, you must ensure that DB role has the LOGIN attribute set and it has CONNECT privilege to the required login database.

```
postgres => alter role accounts-role login;

ALTER ROLE
postgres => grant connect on database accounts-db to accounts-role;
```

Admin can now proceed to create the mapping between AD security group and PostgreSQL DB role.

```
admin=>select pgadmap_set_mapping('accounts-group', 'accounts-role', <SID>, <Weight>);
```

For information on retrieving SID of AD security group, see Retrieving Active Directory Group SID in PowerShell.

There might be cases where an AD user belongs to multiple groups, in that case, AD user will inherit the privileges of the DB role, which was provisioned with the highest weight. If the two roles have the same weight, AD user will inherit the privileges of the DB role corresponding to the mapping that was added recently. The recommendation is to specify weights that reflect the relative permissions/privileges of individual DB roles. Higher the permissions or privileges of a DB role, higher the weight that should be associated with the mapping entry. This will avoid the ambiguity of two mappings having the same weight.

The following table shows a sample mapping from AD security groups to Aurora PostgreSQL DB roles.

AD Security Group	PosgreSQL DB role	Weight
accounts-group	accounts-role	7
sales-group	sales-role	10

AD Security Group	PosgreSQL DB role	Weight
dev-group	dev-role	7

In the following example, `user1` will inherit the privileges of sales-role since it has the higher weight while `user2` will inherit the privileges of `dev-role` as the mapping for this role was created after `accounts-role`, which share the same weight as `accounts-role`.

Username	Security Group membership
user1	accounts-group sales-group
user2	accounts-group dev-group

The psql commands to establish, list, and clear the mappings are shown below. Currently, it isn't possible to modify a single mapping entry. The existing entry needs to be deleted and the mapping recreated.

```
admin=>select pgadmap_set_mapping('accounts-group', 'accounts-role', 'S-1-5-67-890',
 7);
admin=>select pgadmap_set_mapping('sales-group', 'sales-role', 'S-1-2-34-560', 10);
admin=>select pgadmap_set_mapping('dev-group', 'dev-role', 'S-1-8-43-612', 7);

admin=>select * from pgadmap_read_mapping();

ad_sid       | pg_role        | weight | ad_grp
-------------+----------------+--------+---------------
S-1-5-67-890 | accounts-role | 7      | accounts-group
S-1-2-34-560 | sales-role    | 10     | sales-group
S-1-8-43-612 | dev-role      | 7      | dev-group
(3 rows)
```

AD user identity logging/auditing

Use the following command to determine the database role inherited by current or session user:

```
postgres=>select session_user, current_user;

session_user | current_user
-------------+--------------
dev-role     | dev-role

(1 row)
```

To determine the AD security principal identity, use the following command:

```
postgres=>select principal from pg_stat_gssapi where pid = pg_backend_pid();

 principal
-------------------------
 user1@example.com

(1 row)
```

Currently, AD user identity isn't visible in the audit logs. The `log_connections` parameter can be enabled to log DB session establishment. For more information, see Turning on query logging for your Aurora PostgreSQL DB cluster . The output for this includes the AD user identity, as shown below. The backend PID associated with this output can then help attribute actions back to the actual AD user.

```
pgrole1@postgres:[615]:LOG: connection authorized: user=pgrole1
 database=postgres application_name=psql GSS (authenticated=yes, encrypted=yes,
 principal=Admin@EXAMPLE.COM)
```

Limitations

- Microsoft Entra ID known as Azure Active Directory isn't supported.

Using functions from the `pg_ad_mapping` extension

`pg_ad_mapping` extension provided support to the following functions:

pgadmap_set_mapping

This function establishes the mapping between AD security group and Database role with an associated weight.

Syntax

```
pgadmap_set_mapping(
ad_group,
db_role,
ad_group_sid,
weight)
```

Arguments

Parameter	Description
ad_group	Name of AD Group. Value cannot be null or empty string.
db_role	Database role to be mapped to the specified AD Group. Value cannot be null or empty string.
ad_group_sid	Security identifier that is used to uniquely identify the AD group. Value starts with 'S-1-' and cannot be null or empty string. For more information, see Retrieving Active Directory Group SID in PowerShell.
weight	Weight associated with the database role. The role with highest weight gets precedence when user is a member of multiple groups. Default value of weight is 1.

Return type

None

Usage notes

This function adds a new mapping from AD security group to database role. It can only be executed on the primary DB instance of the DB cluster by a user having rds_superuser privilege.

Examples

```
postgres=> select pgadmap_set_mapping('accounts-group','accounts-
role','S-1-2-33-12345-67890-12345-678',10);

pgadmap_set_mapping

(1 row)
```

pgadmap_read_mapping

This function lists the mappings between AD security group and DB role that were set using `pgadmap_set_mapping` function.

Syntax

```
pgadmap_read_mapping()
```

Arguments

None

Return type

Parameter	Description
ad_group_sid	Security identifier that is used to uniquely identify the AD group. Value starts with 'S-1-' and cannot be null or empty string. For more information, see Retrieving Active Directory Group SID in PowerShell.accounts-role@example.com
db_role	Database role to be mapped to the specified AD Group. Value cannot be null or empty string.
weight	Weight associated with the database role. The role with highest weight gets precedence when user is a member of multiple groups. Default value of weight is 1.
ad_group	Name of AD Group. Value cannot be null or empty string.

Usage notes

Call this function to list all the available mappings between AD security group and DB role.

Examples

```
postgres=> select * from pgadmap_read_mapping();

ad_sid                              | pg_role       | weight | ad_grp
------------------------------------+---------------+--------+-----------------
S-1-2-33-12345-67890-12345-678      | accounts-role | 10     | accounts-group
(1 row)

(1 row)
```

pgadmap_reset_mapping

This function resets one or all the mappings that were set using `pgadmap_set_mapping` function.

Syntax

```
pgadmap_reset_mapping(
ad_group_sid,
db_role,
weight)
```

Arguments

Parameter	Description
ad_group_sid	Security identifier that is used to uniquely identify the AD group.
db_role	Database role to be mapped to the specified AD Group.
weight	Weight associated with the database role.

If no arguments are provided, all AD group to DB role mappings are reset. Either all arguments need to be provided or none.

Return type

None

Usage notes

Call this function to delete a specific AD group to DB role mapping or to reset all mappings. This function can only be executed on the primary DB instance of the DB cluster by a user having `rds_superuser` privilege.

Examples

```
postgres=> select * from pgadmap_read_mapping();

   ad_sid                        | pg_role      | weight      | ad_grp
---------------------------------+--------------+-------------+-------------------
 S-1-2-33-12345-67890-12345-678 | accounts-role| 10          | accounts-group
 S-1-2-33-12345-67890-12345-666 | sales-role   | 10          | sales-group

(2 rows)
postgres=> select pgadmap_reset_mapping('S-1-2-33-12345-67890-12345-678', 'accounts-
role', 10);

pgadmap_reset_mapping
(1 row)

postgres=> select * from pgadmap_read_mapping();

   ad_sid                        | pg_role      | weight      | ad_grp
---------------------------------+--------------+-------------+---------------
 S-1-2-33-12345-67890-12345-666 | sales-role   | 10          | sales-group

(1 row)
postgres=> select pgadmap_reset_mapping();

pgadmap_reset_mapping
(1 row)

postgres=> select * from pgadmap_read_mapping();

   ad_sid                        | pg_role      | weight      | ad_grp
---------------------------------+--------------+-------------+--------------
 (0 rows)
```

Migrating data to Amazon Aurora with PostgreSQL compatibility

You have several options for migrating data from your existing database to an Amazon Aurora PostgreSQL-Compatible Edition DB cluster. Your migration options also depend on the database that you are migrating from and the size of the data that you are migrating. Following are your options:

Migrating an RDS for PostgreSQL DB instance using a snapshot

You can migrate data directly from an RDS for PostgreSQL DB snapshot to an Aurora PostgreSQL DB cluster.

Migrating an RDS for PostgreSQL DB instance using an Aurora read replica

You can also migrate from an RDS for PostgreSQL DB instance by creating an Aurora PostgreSQL read replica of an RDS for PostgreSQL DB instance. When the replica lag between the RDS for PostgreSQL DB instance and the Aurora PostgreSQL read replica is zero, you can stop replication. At this point, you can make the Aurora read replica a standalone Aurora PostgreSQL DB cluster for reading and writing.

Importing data from Amazon S3 into Aurora PostgreSQL

You can migrate data by importing it from Amazon S3 into a table belonging to an Aurora PostgreSQL DB cluster.

Migrating from a database that is not PostgreSQL-compatible

You can use Amazon Database Migration Service (Amazon DMS) to migrate data from a database that is not PostgreSQL-compatible. For more information on Amazon DMS, see What is Amazon Database Migration Service? in the *Amazon Database Migration Service User Guide*.

Note

Enabling Kerberos authentication isn't currently supported on Aurora PostgreSQL DB cluster during migration from RDS for PostgreSQL. You can enable Kerberos authentication only on a standalone Aurora PostgreSQL DB cluster.

For a list of Amazon Web Services Regions where Aurora is available, see Amazon Aurora in the *Amazon Web Services General Reference*.

> **Important**
>
> If you plan to migrate an RDS for PostgreSQL DB instance to an Aurora PostgreSQL DB cluster in the near future, we strongly recommend that you turn off auto minor version upgrades for the DB instance early in the migration planning phase. Migration to Aurora PostgreSQL might be delayed if the RDS for PostgreSQL version isn't yet supported by Aurora PostgreSQL.
> For information about Aurora PostgreSQL versions, see Engine versions for Amazon Aurora PostgreSQL.

Migrating a snapshot of an RDS for PostgreSQL DB instance to an Aurora PostgreSQL DB cluster

To create an Aurora PostgreSQL DB cluster, you can migrate a DB snapshot of an RDS for PostgreSQL DB instance. The new Aurora PostgreSQL DB cluster is populated with the data from the original RDS for PostgreSQL DB instance. For information about creating a DB snapshot, see Creating a DB snapshot.

In some cases, the DB snapshot might not be in the Amazon Web Services Region where you want to locate your data. If so, use the Amazon RDS console to copy the DB snapshot to that Amazon Web Services Region. For information about copying a DB snapshot, see Copying a DB snapshot.

You can migrate RDS for PostgreSQL snapshots that are compatible with the Aurora PostgreSQL versions available in the given Amazon Web Services Region. For example, you can migrate a snapshot from an RDS for PostgreSQL 11.1 DB instance to Aurora PostgreSQL version 11.4, 11.7, 11.8, or 11.9 in the US West (N. California) Region. You can migrate RDS for PostgreSQL 10.11 snapshot to Aurora PostgreSQL 10.11, 10.12, 10.13, and 10.14. In other words, the RDS for PostgreSQL snapshot must use the same or a lower minor version as the Aurora PostgreSQL.

You can also choose for your new Aurora PostgreSQL DB cluster to be encrypted at rest by using an Amazon KMS key. This option is available only for unencrypted DB snapshots.

To migrate an RDS for PostgreSQL DB snapshot to an Aurora PostgreSQL DB cluster, you can use the Amazon Web Services Management Console, the Amazon CLI, or the RDS API. When you use

the Amazon Web Services Management Console, the console takes the actions necessary to create both the DB cluster and the primary instance.

Console

To migrate a PostgreSQL DB snapshot by using the RDS console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Snapshots**.
3. On the **Snapshots** page, choose the RDS for PostgreSQL snapshot that you want to migrate into an Aurora PostgreSQL DB cluster.
4. Choose **Actions** then choose **Migrate snapshot**.
5. Set the following values on the **Migrate database** page:

   - **DB engine version**: Choose a DB engine version you want to use for the new migrated instance.
   - **DB instance identifier**: Enter a name for the DB cluster that is unique for your account in the Amazon Web Services Region that you chose. This identifier is used in the endpoint addresses for the instances in your DB cluster. You might choose to add some intelligence to the name, such as including the Amazon Web Services Region and DB engine that you chose, for example **`aurora-cluster1`**.

     The DB instance identifier has the following constraints:

     - It must contain 1–63 alphanumeric characters or hyphens.
     - Its first character must be a letter.
     - It can't end with a hyphen or contain two consecutive hyphens.
     - It must be unique for all DB instances per Amazon account, per Amazon Web Services Region.
   - **DB instance class**: Choose a DB instance class that has the required storage and capacity for your database, for example `db.r6g.large`. Aurora cluster volumes automatically grow as the amount of data in your database increases. So you only need to choose a DB instance class that meets your current storage requirements. For more information, see Overview of Amazon Aurora storage.
   - **Virtual private cloud (VPC)**: If you have an existing VPC, then you can use that VPC with your Aurora PostgreSQL DB cluster by choosing your VPC identifier, for example `vpc-`

a464d1c1. For information about creating a VPC, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only).

Otherwise, you can choose to have Amazon RDS create a VPC for you by choosing **Create new VPC**.

- **DB subnet group**: If you have an existing subnet group, then you can use that subnet group with your Aurora PostgreSQL DB cluster by choosing your subnet group identifier, for example `gs-subnet-group1`.
- **Public access**: Choose **No** to specify that instances in your DB cluster can only be accessed by resources inside of your VPC. Choose **Yes** to specify that instances in your DB cluster can be accessed by resources on the public network.

> **Note**
>
> Your production DB cluster might not need to be in a public subnet, because only your application servers require access to your DB cluster. If your DB cluster doesn't need to be in a public subnet, set **Public access** to **No**.

- **VPC security group**: Choose a VPC security group to allow access to your database.
- **Availability Zone**: Choose the Availability Zone to host the primary instance for your Aurora PostgreSQL DB cluster. To have Amazon RDS choose an Availability Zone for you, choose **No preference**.
- **Database port**: Enter the default port to be used when connecting to instances in the Aurora PostgreSQL DB cluster. The default is 5432.

> **Note**
>
> You might be behind a corporate firewall that doesn't allow access to default ports such as the PostgreSQL default port, 5432. In this case, provide a port value that your corporate firewall allows. Remember that port value later when you connect to the Aurora PostgreSQL DB cluster.

- **Enable Encryption**: Choose **Enable Encryption** for your new Aurora PostgreSQL DB cluster to be encrypted at rest. Also choose a KMS key as the **Amazon KMS key** value.
- **Auto minor version upgrade**: Choose **Enable auto minor version upgrade** to enable your Aurora PostgreSQL DB cluster to receive minor PostgreSQL DB engine version upgrades automatically when they become available.

The **Auto minor version upgrade** option only applies to upgrades to PostgreSQL minor engine versions for your Aurora PostgreSQL DB cluster. It doesn't apply to regular patches applied to maintain system stability.

6. Choose **Migrate** to migrate your DB snapshot.
7. Choose **Databases** to see the new DB cluster. Choose the new DB cluster to monitor the progress of the migration. When the migration completes, the Status for the cluster is **Available**. On the **Connectivity & security** tab, you can find the cluster endpoint to use for connecting to the primary writer instance of the DB cluster. For more information on connecting to an Aurora PostgreSQL DB cluster, see Connecting to an Amazon Aurora DB cluster.

Amazon CLI

Using the Amazon CLI to migrate an RDS for PostgreSQL DB snapshot to an Aurora PostgreSQL involves two separate Amazon CLI commands. First, you use the `restore-db-cluster-from-snapshot` Amazon CLI command create a new Aurora PostgreSQL DB cluster. You then use the `create-db-instance` command to create the primary DB instance in the new cluster to complete the migration. The following procedure creates an Aurora PostgreSQL DB cluster with primary DB instance that has the same configuration as the DB instance used to create the snapshot.

To migrate an RDS for PostgreSQL DB snapshot to an Aurora PostgreSQL DB cluster

1. Use the describe-db-snapshots command to obtain information about the DB snapshot you want to migrate. You can specify either the `--db-instance-identifier` parameter or the `--db-snapshot-identifier` in the command. If you don't specify one of these parameters, you get all snapshots.

```
aws rds describe-db-snapshots --db-instance-identifier <your-db-instance-name>
```

2. The command returns all configuration details for any snapshots created from the DB instance specified. In the output, find the snapshot that you want to migrate and locate its Amazon Resource Name (ARN). To learn more about Amazon RDS ARNs, see Amazon Relational Database Service (Amazon RDS). An ARN looks similar to the output following.

```
“DBSnapshotArn": "arn:aws:rds:aws-region:111122223333:snapshot:<snapshot_name>"
```

Also in the output you can find configuration details for the RDS for PostgreSQL DB instance, such as the engine version, allocated storage, whether or not the DB instance is encrypted, and so on.

3. Use the restore-db-cluster-from-snapshot command to start the migration. Specify the following parameters:

   - `--db-cluster-identifier` – The name that you want to give to the Aurora PostgreSQL DB cluster. This Aurora DB cluster is the target for your DB snapshot migration.
   - `--snapshot-identifier` – The Amazon Resource Name (ARN) of the DB snapshot to migrate.
   - `--engine` – Specify `aurora-postgresql` for the Aurora DB cluster engine.
   - `--kms-key-id` – This optional parameter lets you create an encrypted Aurora PostgreSQL DB cluster from an unencrypted DB snapshot. It also lets you choose a different encryption key for the DB cluster than the key used for the DB snapshot.

     > **Note**
     >
     > You can't create an unencrypted Aurora PostgreSQL DB cluster from an encrypted DB snapshot.

   Without the `--kms-key-id` parameter specified as shown following, the restore-db-cluster-from-snapshot Amazon CLI command creates an empty Aurora PostgreSQL DB cluster that's either encrypted using the same key as the DB snapshot or is unencrypted if the source DB snapshot isn't encrypted.

   For Linux, macOS, or Unix:

   ```
   aws rds restore-db-cluster-from-snapshot \
       --db-cluster-identifier cluster-name \
       --snapshot-identifier arn:aws:rds:aws-region:111122223333:snapshot:your-
   snapshot-name \
       --engine aurora-postgresql
   ```

   For Windows:

   ```
   aws rds restore-db-cluster-from-snapshot ^
   ```

```
    --db-cluster-identifier new_cluster ^
    --snapshot-identifier arn:aws:rds:aws-region:111122223333:snapshot:your-
snapshot-name ^
    --engine aurora-postgresql
```

4. The command returns details about the Aurora PostgreSQL DB cluster that's being created for the migration. You can check the status of the Aurora PostgreSQL DB cluster by using the describe-db-clusters Amazon CLI command.

```
aws rds describe-db-clusters --db-cluster-identifier cluster-name
```

5. When the DB cluster becomes "available", you use create-db-instance command to populate the Aurora PostgreSQL DB cluster with the DB instance based on your Amazon RDS DB snapshot. Specify the following parameters:

   - `--db-cluster-identifier` – The name of the new Aurora PostgreSQL DB cluster that you created in the previous step.
   - `--db-instance-identifier` – The name you want to give to the DB instance. This instance becomes the primary node in your Aurora PostgreSQL DB cluster.
   - `----db-instance-class` – Specify the DB instance class to use. Choose from among the DB instance classes supported by the Aurora PostgreSQL version to which you're migrating. For more information, see DB instance class types and Supported DB engines for DB instance classes.
   - `--engine` – Specify `aurora-postgresql` for the DB instance.

   You can also create the DB instance with a different configuration than the source DB snapshot, by passing in the appropriate options in the `create-db-instance` Amazon CLI command. For more information, see the create-db-instance command.

   For Linux, macOS, or Unix:

```
aws rds create-db-instance \
    --db-cluster-identifier cluster-name \
    --db-instance-identifier --db-instance-class db.instance.class \
    --engine aurora-postgresql
```

   For Windows:

```
aws rds create-db-instance ^
    --db-cluster-identifier cluster-name ^
    --db-instance-identifier --db-instance-class db.instance.class ^
    --engine aurora-postgresql
```

When the migration process completes, the Aurora PostgreSQL cluster has a populated primary DB instance.

Migrating data from an RDS for PostgreSQL DB instance to an Aurora PostgreSQL DB cluster using an Aurora read replica

You can use an RDS for PostgreSQL DB instance as the basis for a new Aurora PostgreSQL DB cluster by using an Aurora read replica for the migration process. The Aurora read replica option is available only for migrating within the same Amazon Web Services Region and account, and it's available only if the Region offers a compatible version of Aurora PostgreSQL for your RDS for PostgreSQL DB instance. By *compatible*, we mean that the Aurora PostgreSQL version is the same as the RDS for PostgreSQL version, or that it is a higher minor version in the same major version family.

For example, to use this technique to migrate an RDS for PostgreSQL 11.14 DB instance, the Region must offer Aurora PostgreSQL version 11.14 or a higher minor version in the PostgreSQL version 11 family.

Topics

- Overview of migrating data by using an Aurora read replica
- Preparing to migrate data by using an Aurora read replica
- Creating an Aurora read replica
- Promoting an Aurora read replica

Overview of migrating data by using an Aurora read replica

Migrating from an RDS for PostgreSQL DB instance to an Aurora PostgreSQL DB cluster is a multistep procedure. First, you create an Aurora read replica of your source RDS for PostgreSQL DB instance. That starts a replication process from your RDS for PostgreSQL DB instance to a special-purpose DB cluster known as a Replica *cluster*. The Replica cluster consists solely of an Aurora read replica (a reader instance).

> **Note**
>
> It can take several hours per terabyte of data for the migration to complete.

Promoting an Aurora PostgreSQL Replica

After you create an Aurora PostgreSQL DB cluster, follow these steps to promote the Aurora Replica:

1. Stop all database write workload on the source RDS for PostgreSQL DB instance.
2. Get the current WAL LSN from the source RDS for PostgreSQL DB instance:

```
SELECT pg_current_wal_lsn();
pg_current_wal_lsn
--------------------
0/F0000318
(1 row)
```

3. On the Aurora PostgreSQL Replica cluster, check that the replayed LSN is greater than the LSN from step 2:

```
SELECT pg_last_wal_replay_lsn();
pg_last_wal_replay_lsn
------------------------
0/F0000400
(1 row)
```

   Alternatively, you can use the following query on the source RDS for PostgreSQL DB instance:

```
SELECT restart_lsn FROM pg_replication_slots;
```

4. Promote the Aurora PostgreSQL Replica cluster.

   When the replication stops, the replica cluster is promoted to a standalone Aurora PostgreSQL DB cluster, and the reader is promoted to writer instance for the cluster. At this point, you can add instances to the Aurora PostgreSQL DB cluster to size it according to your use case. If you no longer need the original RDS for PostgreSQL DB instance, you can delete it.

You can't create an Aurora read replica if your RDS for PostgreSQL DB instance already has an Aurora read replica or if it has a cross-Region read replica.

Preparing to migrate data by using an Aurora read replica

> **Note**
>
> When preparing to migrate data to Aurora PostgreSQL, it's important to identify and handle unlogged tables appropriately. For more information, see Handling unlogged tables during migration.

During the migration process using Aurora read replica, updates made to the source RDS for PostgreSQL DB instance are asynchronously replicated to the Aurora read replica of the Replica cluster. The process uses PostgreSQL's native streaming replication functionality which stores write-ahead logs (WAL) segments on the source instance. Before starting this migration process, make sure that your instance has sufficient storage capacity by checking values for the metrics listed in the table.

Metric	Description
`FreeStorageSpace`	The available storage space. Units: Bytes
`OldestReplicationSlotLag`	The size of the lag for WAL data in the replica that is lagging the most. Units: Megabytes
`RDSToAuroraPostgreSQLReplicaLag`	The amount of time in seconds that an Aurora PostgreSQL DB cluster lags behind the source RDS DB instance.
`TransactionLogsDiskUsage`	The disk space used by the transaction logs. Units: Megabytes

For more information about monitoring your RDS instance, see Monitoring in the *Amazon RDS User Guide*.


Creating an Aurora read replica

You can create an Aurora read replica for an RDS for PostgreSQL DB instance by using the Amazon Web Services Management Console or the Amazon CLI. The option to create an Aurora read replica using the Amazon Web Services Management Console is available only if the Amazon Web Services Region offers a compatible Aurora PostgreSQL version. That is, it's available only if there's an Aurora PostgreSQL version that is the same as the RDS for PostgreSQL version or a higher minor version in the same major version family.

Console

To create an Aurora read replica from a source PostgreSQL DB instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the RDS for PostgreSQL DB instance that you want to use as the source for your Aurora read replica. For **Actions**, choose **Create Aurora read replica**. If this choice doesn't display, it means that a compatible Aurora PostgreSQL version isn't available in the Region.

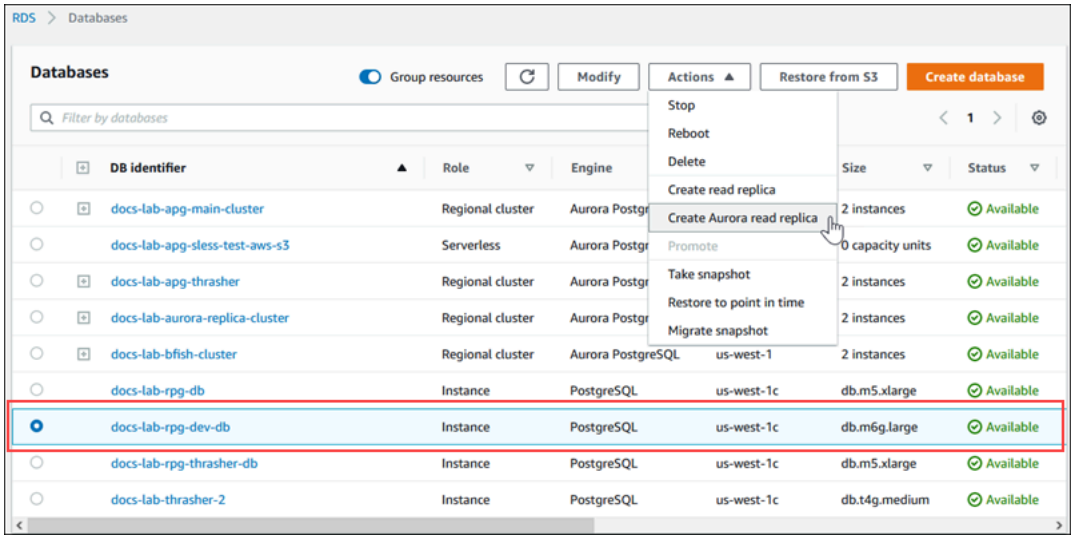

4. On the Create Aurora read replica settings page, you configure the properties for the Aurora PostgreSQL DB cluster as shown in the following table. The Replica DB cluster is created from a snapshot of the source DB instance using the same 'master' user name and password as the source, so you can't change these at this time.

Option	Description
DB instance class	Choose a DB instance class that meets the processing and memory requirements primary instance in the DB cluster. For more information, see Amazon AuroraDB instance classes.
Multi-AZ deployment	Not available during the migration
DB instance identifier	Enter the name that you want to give to the DB instance. This identifier is used in the endpoint address for the primary instance of the new DB cluster. The DB instance identifier has the following constrain ts: • It must contain 1–63 alphanumeric characters or hyphens. • Its first character must be a letter. • It can't end with a hyphen or contain two consecuti ve hyphens. • It must be unique for all DB instances for each Amazon account, for each Amazon Web Services Region.
Virtual Private Cloud (VPC)	Choose the VPC to host the DB cluster. Choose **Create new VPC** to have Amazon RDS create a VPC for you. For more information, see DB cluster prerequisites.
DB subnet group	Choose the DB subnet group to use for the DB cluster. Choose **Create new DB Subnet Group** to have Amazon RDS create a DB subnet group for you. For more information, see DB cluster prerequisites.

Option	Description
Public accessibility	Choose **Yes** to give the DB cluster a public IP address; otherwise, choose **No**. The instances in your DB cluster can be a mix of both public and private DB instances. For more information about hiding instances from public access, see Hiding a DB cluster in a VPC from the internet.
Availability zone	Determine if you want to specify a particular Availability Zone. For more information about Availability Zones, see Regions and Availability Zones.
VPC security groups	Choose one or more VPC security groups to secure network access to the DB cluster. Choose **Create new VPC security group** to have Amazon RDS create a VPC security group for you. For more information, see DB cluster prerequisites.
Database port	Specify the port for applications and utilities to use to access the database. Aurora PostgreSQL DB clusters default to the default PostgreSQL port, 5432. Firewalls at some companies block connections to this port. If your company firewall blocks the default port, choose another port for the new DB cluster.
DB parameter group	Choose a DB parameter group for the Aurora PostgreSQL DB cluster. Aurora has a default DB parameter group you can use, or you can create your own DB parameter group. For more information about DB parameter groups, see Parameter groups for Amazon Aurora.

Option	Description
DB cluster parameter group	Choose a DB cluster parameter group for the Aurora PostgreSQL DB cluster. Aurora has a default DB cluster parameter group you can use, or you can create your own DB cluster parameter group. For more information about DB cluster parameter groups, see Parameter groups for Amazon Aurora.
Encryption	Choose **Enable encryption** for your new Aurora DB cluster to be encrypted at rest. If you choose **Enable encryption**, also choose a KMS key as the **Amazon KMS key** value.
Priority	Choose a failover priority for the DB cluster. If you don't choose a value, the default is **tier-1**. This priority determines the order in which Aurora Replicas are promoted when recovering from a primary instance failure. For more information, see Fault tolerance for an Aurora DB cluster.
Backup retention period	Choose the length of time, 1–35 days, for Aurora to retain backup copies of the database. Backup copies can be used for point-in-time restores (PITR) of your database down to the second.
Enhanced monitoring	Choose **Enable enhanced monitoring** to enable gathering metrics in real time for the operating system that your DB cluster runs on. For more information, see Monitoring OS metrics with Enhanced Monitoring.
Monitoring Role	Only available if you chose **Enable enhanced monitoring**. The Amazon Identity and Access Management (IAM) role to use for Enhanced Monitoring. For more information, see Setting up and enabling Enhanced Monitoring.

Option	Description
Granularity	Only available if you chose **Enable enhanced monitoring**. Set the interval, in seconds, between when metrics are collected for your DB cluster.
Auto minor version upgrade	Choose **Yes** to enable your Aurora PostgreSQL DB cluster to receive minor PostgreSQL DB engine version upgrades automatically when they become available. The **Auto minor version upgrade** option only applies to upgrades to PostgreSQL minor engine versions for your Aurora PostgreSQL DB cluster. It doesn't apply to regular patches applied to maintain system stability.
Maintenance window	Choose the weekly time range during which system maintenance can occur.

5. Choose **Create read replica**.

Amazon CLI

To create an Aurora read replica from a source RDS for PostgreSQL DB instance by using the Amazon CLI, you first use the **create-db-cluster** CLI command to create an empty Aurora DB cluster. Once the DB cluster exists, you then use the **create-db-instance** command to create the primary instance for your DB cluster. The primary instance is the first instance that's created in an Aurora DB cluster. In this case, it's created initially as an Aurora read replica of your RDS for PostgreSQL DB instance. When the process concludes, your RDS for PostgreSQL DB instance has effectively been migrated to an Aurora PostgreSQL DB cluster.

You don't need to specify the main user account (typically, `postgres`), its password, or the database name. The Aurora read replica obtains these automatically from the source RDS for PostgreSQL DB instance that you identify when you invoke the Amazon CLI commands.

You do need to specify the engine version to use for the Aurora PostgreSQL DB cluster and the DB instance. The version you specify should match the source RDS for PostgreSQL DB instance. If the source RDS for PostgreSQL DB instance is encrypted, you need to also specify encryption

for the Aurora PostgreSQL DB cluster primary instance. Migrating an encrypted instance to an unencrypted Aurora DB cluster isn't supported.

The following examples create an Aurora PostgreSQL DB cluster named `my-new-aurora-cluster` that's going to use an unencrypted RDS DB source instance. You first create the Aurora PostgreSQL DB cluster by calling the `create-db-cluster` CLI command. The example shows how to use the optional `--storage-encrypted` parameter to specify that the DB cluster should be encrypted. Because the source DB isn't encrypted, the `--kms-key-id` is used to specify the key to use. For more information about required and optional parameters, see the list following the example.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster  \
    --db-cluster-identifier my-new-aurora-cluster \
    --db-subnet-group-name my-db-subnet \
    --vpc-security-group-ids sg-11111111 \
    --engine aurora-postgresql \
    --engine-version same-as-your-rds-instance-version \
    --replication-source-identifier arn:aws:rds:aws-region:111122223333:db:rpg-source-db \
    --storage-encrypted \
    --kms-key-id arn:aws:kms:aws-region:111122223333:key/11111111-2222-3333-444444444444
```

For Windows:

```
aws rds create-db-cluster  ^
    --db-cluster-identifier my-new-aurora-cluster ^
    --db-subnet-group-name my-db-subnet ^
    --vpc-security-group-ids sg-11111111 ^
    --engine aurora-postgresql ^
    --engine-version same-as-your-rds-instance-version ^
    --replication-source-identifier arn:aws:rds:aws-region:111122223333:db:rpg-source-db ^
    --storage-encrypted ^
    --kms-key-id arn:aws:kms:aws-region:111122223333:key/11111111-2222-3333-444444444444
```

In the following list you can find more information about some of the options shown in the example. Unless otherwise specified, these parameters are required.

- `--db-cluster-identifier` – You need to give your new Aurora PostgreSQL DB cluster a name.
- `--db-subnet-group-name` – Create your Aurora PostgreSQL DB cluster in the same DB subnet as the source DB instance.
- `--vpc-security-group-ids` – Specify the security group for your Aurora PostgreSQL DB cluster.
- `--engine-version` – Specify the version to use for the Aurora PostgreSQL DB cluster. This should be the same as or a higher minor version than the version used by your source RDS for PostgreSQL DB instance.
- `--replication-source-identifier` – Identify your RDS for PostgreSQL DB instance using its Amazon Resource Name (ARN). For more information about Amazon RDS ARNs, see Amazon Relational Database Service (Amazon RDS) in the *Amazon Web Services General Reference*.
- `--storage-encrypted` – Optional. Use only when needed to specify encryption as follows:
  - Use this parameter when the source DB instance has encrypted storage. The call to `create-db-cluster` fails if you don't use this parameter with a source DB instance that has encrypted storage. If you want to use a different key for the Aurora PostgreSQL DB cluster than the key used by the source DB instance, you need to also specify the `--kms-key-id`.
  - Use if the source DB instance's storage is unencrypted but you want the Aurora PostgreSQL DB cluster to use encryption. If so, you also need to identify the encryption key to use with the `--kms-key-id` parameter.
- `--kms-key-id` – Optional. When used, you can specify the key to use for storage encryption (`--storage-encrypted`) by using the key's ARN, ID, alias ARN, or its alias name. This parameter is needed only for the following situations:
  - To choose a different key for the Aurora PostgreSQL DB cluster than that used by the source DB instance.
  - To create an encrypted cluster from an unencrypted source. In this case, you need to specify the key that Aurora PostgreSQL should use for encryption.

After creating the Aurora PostgreSQL DB cluster, you then create the primary instance by using the `create-db-instance` CLI command, as shown in the following:

For Linux, macOS, or Unix:

```
aws rds create-db-instance \
    --db-cluster-identifier my-new-aurora-cluster \
```

```
    --db-instance-class db.x2g.16xlarge \
    --db-instance-identifier rpg-for-migration \
    --engine aurora-postgresql
```

For Windows:

```
aws rds create-db-instance ^
    --db-cluster-identifier my-new-aurora-cluster ^
    --db-instance-class db.x2g.16xlarge ^
    --db-instance-identifier rpg-for-migration ^
    --engine aurora-postgresql
```

In the following list, you can find more information about some of the options shown in the example.

- `--db-cluster-identifier` – Specify the name of the Aurora PostgreSQL DB cluster that you created with the `create-db-instance` command in the previous steps.
- `--db-instance-class` – The name of the DB instance class to use for your primary instance, such as `db.r4.xlarge`, `db.t4g.medium`, `db.x2g.16xlarge`, and so on. For a list of available DB instance classes, see DB instance class types.
- `--db-instance-identifier` – Specify the name to give your primary instance.
- `--engine aurora-postgresql` – Specify `aurora-postgresql` for the engine.

RDS API

To create an Aurora read replica from a source RDS for PostgreSQL DB instance, first use the RDS API operation `CreateDBCluster` to create a new Aurora DB cluster for the Aurora read replica that gets created from your source RDS for PostgreSQL DB instance. When the Aurora PostgreSQL DB cluster is available, you then use the `CreateDBInstance` to create the primary instance for the Aurora DB cluster.

You don't need to specify the main user account (typically, `postgres`), its password, or the database name. The Aurora read replica obtains these automatically from the source RDS for PostgreSQL DB instance specified with `ReplicationSourceIdentifier`.

You do need to specify the engine version to use for the Aurora PostgreSQL DB cluster and the DB instance. The version you specify should match the source RDS for PostgreSQL DB instance. If the source RDS for PostgreSQL DB instance is encrypted, you need to also specify encryption

for the Aurora PostgreSQL DB cluster primary instance. Migrating an encrypted instance to an unencrypted Aurora DB cluster isn't supported.

To create the Aurora DB cluster for the Aurora read replica, use the RDS API operation `CreateDBCluster` with the following parameters:

- `DBClusterIdentifier` – The name of the DB cluster to create.
- `DBSubnetGroupName` – The name of the DB subnet group to associate with this DB cluster.
- `Engine=aurora-postgresql` – The name of the engine to use.
- `ReplicationSourceIdentifier` – The Amazon Resource Name (ARN) for the source PostgreSQL DB instance. For more information about Amazon RDS ARNs, see Amazon Relational Database Service (Amazon RDS) in the *Amazon Web Services General Reference.* If `ReplicationSourceIdentifier` identifies an encrypted source, Amazon RDS uses your default KMS key unless you specify a different key using the `KmsKeyId` option.
- `VpcSecurityGroupIds` – The list of Amazon EC2 VPC security groups to associate with this DB cluster.
- `StorageEncrypted` – Indicates that the DB cluster is encrypted. When you use this parameter without also specifying the `ReplicationSourceIdentifier`, Amazon RDS uses your default KMS key.
- `KmsKeyId` – The key for an encrypted cluster. When used, you can specify the key to use for storage encryption by using the key's ARN, ID, alias ARN, or its alias name.

For more information, see `CreateDBCluster` in the *Amazon RDS API Reference*.

Once the Aurora DB cluster is available, you can then create a primary instance for it by using the RDS API operation `CreateDBInstance` with the following parameters:

- `DBClusterIdentifier` – The name of your DB cluster.
- `DBInstanceClass` – The name of the DB instance class to use for your primary instance.
- `DBInstanceIdentifier` – The name of your primary instance.
- `Engine=aurora-postgresql` – The name of the engine to use.

For more information, see `CreateDBInstance` in the *Amazon RDS API Reference*.

Promoting an Aurora read replica


The migration to Aurora PostgreSQL isn't complete until you promote the Replica cluster, so don't delete the RDS for PostgreSQL source DB instance just yet.

Before promoting the Replica cluster, make sure that the RDS for PostgreSQL DB instance doesn't have any in-process transactions or other activity writing to the database. When the replica lag on the Aurora read replica reaches zero (0), you can promote the Replica cluster. For more information about monitoring replica lag, see Monitoring Aurora PostgreSQL replication and Instance-level metrics for Amazon Aurora.

Console

To promote an Aurora read replica to an Aurora DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the Replica cluster.

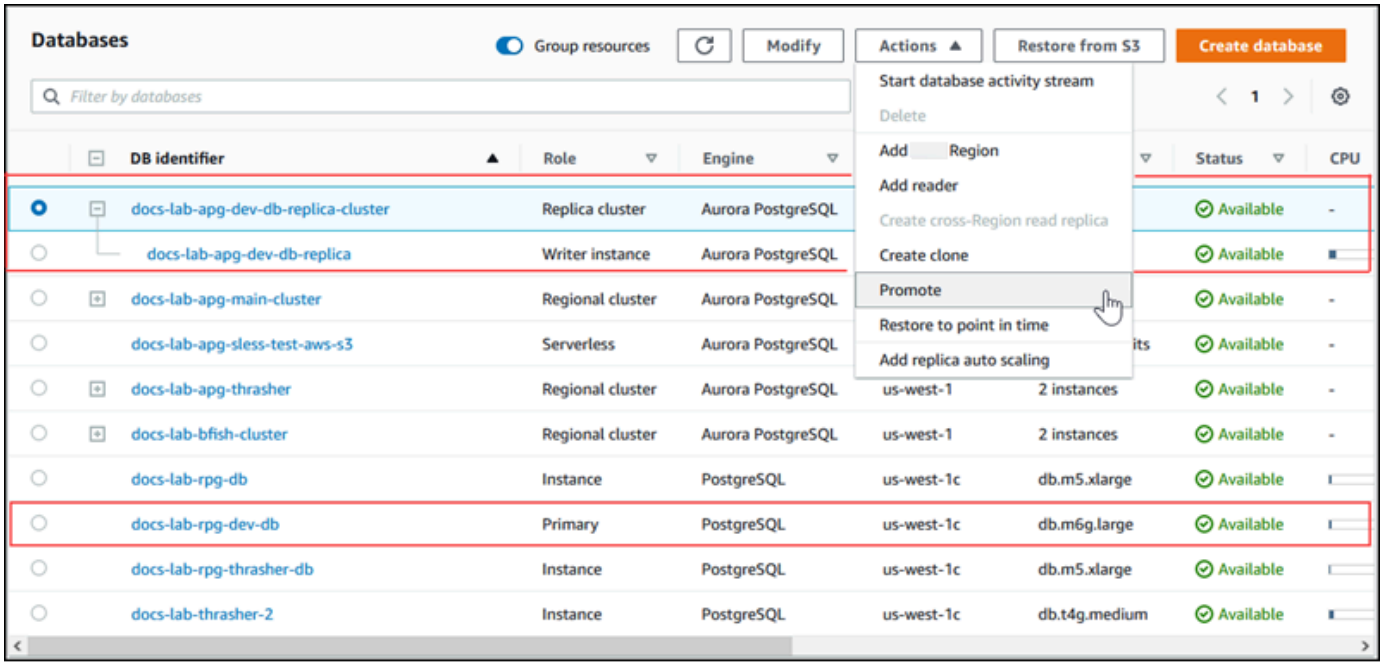

4. For **Actions**, choose **Promote**. This may take a few minutes and can cause downtime.

When the process completes, the Aurora Replica cluster is a Regional Aurora PostgreSQL DB cluster, with a Writer instance containing the data from the RDS for PostgreSQL DB instance.

Amazon CLI

To promote an Aurora read replica to a stand-alone DB cluster, use the **promote-read-replica-db-cluster** Amazon CLI command.

Example

For Linux, macOS, or Unix:

```
aws rds promote-read-replica-db-cluster \
    --db-cluster-identifier myreadreplicacluster
```

For Windows:

```
aws rds promote-read-replica-db-cluster ^
    --db-cluster-identifier myreadreplicacluster
```

RDS API

To promote an Aurora read replica to a stand-alone DB cluster, use the RDS API operation PromoteReadReplicaDBCluster.

After you promote the Replica cluster, you can confirm that the promotion has completed by checking the event log, as follows.

To confirm that the Aurora Replica cluster was promoted

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Events**.
3. On the **Events** page, find the name of your cluster in the **Source** list. Each event has a source, type, time, and message. You can see all events that have occurred in your Amazon Web Services Region for your account. A successful promotion generates the following message.

   ```
   Promoted Read Replica cluster to a stand-alone database cluster.
   ```

After promotion is complete, the source RDS for PostgreSQL DB instance and the Aurora PostgreSQL DB cluster are unlinked. You can direct your client applications to the endpoint for the

Aurora read replica. For more information on the Aurora endpoints, see Amazon Aurora endpoint connections. At this point, you can safely delete the DB instance.

Optimizing query performance in Aurora PostgreSQL

Optimizing query performance is crucial because it helps databases run faster and more efficiently while using fewer resources, which results in better user experience and lower operating costs. Amazon Aurora PostgreSQL provides several features to help optimize query performance for PostgreSQL workloads.

Topics

- Improving query performance for Aurora PostgreSQL with Aurora Optimized Reads
- Optimizing correlated subqueries in Aurora PostgreSQL
- Improving query performance using adaptive join
- Using shared plan cache

Improving query performance for Aurora PostgreSQL with Aurora Optimized Reads

You can achieve faster query processing for Aurora PostgreSQL with Aurora Optimized Reads. An Aurora PostgreSQL DB instance that uses Aurora Optimized Reads delivers up to 8x improved query latency and up to 30% cost savings for applications with large datasets, that exceed the memory capacity of a DB instance.

Topics

- Overview of Aurora Optimized Reads in PostgreSQL
- Using Aurora Optimized Reads
- Use cases for Aurora Optimized Reads
- Monitoring DB instances that use Aurora Optimized Reads
- Best practices for Aurora Optimized Reads

Overview of Aurora Optimized Reads in PostgreSQL

Aurora Optimized Reads is available by default when you create a DB cluster that uses Graviton-based R6gd, R8gd, and Intel-based R6id instances with non-volatile memory express (NVMe) storage. It is available from the following PostgreSQL versions:

- 14.12 and higher versions, 15.7 and higher versions, 16.3 and higher versions, 17.4 and higher versions for R8gd instances
- 14.9 and higher versions, 15.4 and higher versions, 16.1 and all higher versions for R6gd and R6id instances

Aurora Optimized Reads supports two capabilities: tiered cache and temporary objects.

Optimized Reads-enabled tiered cache - Using tiered cache, you can extend your DB instance caching capacity by up to 5x the instance memory. This automatically maintains the cache to contain the most recent, transactionally consistent data, freeing applications from the overhead of managing the data currency of external result-set based caching solutions. It offers up to 8x better latency for queries that were previously fetching data from Aurora storage.

In Aurora, the value for `shared_buffers` in the default parameter group is usually set to around 75% of the available memory. However, for the r8gd, r6gd, and r6id instance types, Aurora reduces the `shared_buffers` space by 4.5% to host the metadata for the Optimized Reads cache.

Optimized Reads-enabled temporary objects - Using temporary objects, you can achieve faster query processing by placing the temporary files that are generated by PostgreSQL on the local NVMe storage. This reduces the traffic to Elastic Block Storage (EBS) over the network. It offers up to 2x better latency and throughput for advanced queries that sort, join, or merge large volumes of data that do not fit within the memory capacity available on a DB instance.

On an Aurora I/O-Optimized cluster, Optimized Reads makes use of both tiered cache and temporary objects on NVMe storage. With Optimized Reads-enabled tiered cache capability, Aurora allocates 2x the instance memory for temporary objects, approximately 10% of the storage for internal operations and the remaining storage as tiered cache. On an Aurora Standard cluster, Optimized Reads makes use of only temporary objects.

With Aurora I/O-Optimized clusters, you can resize the allocated space for Optimized Reads-enabled temporary objects using the dynamic parameter `aurora_temp_space_size` at the instance level. This resizing feature is available from the following PostgreSQL versions:

- 16.8 and all higher versions
- 15.12 and higher 15 versions
- 14.17 and higher 14 versions

With this parameter, you can resize the capacity from 2x of instance memory up to 90% of total instance NVMe storage capacity without requiring database engine restart. When you expand temporary object space, the change takes effect immediately, regardless of concurrent workloads. However, when you reduce the space, the adjustment completes only after there is sufficient unused space in temporary objects to accommodate the new size request. After you resize Optimized Reads-enabled temporary objects, the tiered cache automatically adjusts to use any available space.

Engine	Cluster storage configuration	Optimized Reads-enabled temporary objects	Optimized Reads-enabled tiered cache	Versions supported
Aurora PostgreSQL-Compatible Edition	Standard	Yes	No	• 14.9 and higher versions, 15.4 and higher versions, 16.1 and all higher versions for r6gd and r6id instances • 14.12 and higher versions, 15.7 and higher versions, 16.3 and higher versions, 17.4 and higher
	I/O-Optimized	Yes	Yes	

Engine	Cluster storage configuration	Optimized Reads-enabled temporary objects	Optimized Reads-enabled tiered cache	Versions supported
				versions for r8gd instances

> **Note**
>
> A switch between IO-Optimized and Standard clusters on a NVMe-based DB instance class causes an immediate database engine restart.

In Aurora PostgreSQL, use the `temp_tablespaces` parameter to configure the table space where the temporary objects are stored.

To check whether the temporary objects are configured, use the following command:

```
postgres=> show temp_tablespaces;
temp_tablespaces
---------------------
aurora_temp_tablespace
(1 row)
```

The `aurora_temp_tablespace` is a tablespace configured by Aurora that points to the NVMe local storage. You can't modify this parameter or switch back to Amazon EBS storage.

To check whether optimized reads cache is turned on, use the following command:

```
postgres=> show shared_preload_libraries;
                shared_preload_libraries
-----------------------------------------------------------
rdsutils,pg_stat_statements,aurora_optimized_reads_cache
```

Using Aurora Optimized Reads

When you provision an Aurora PostgreSQL DB instance with one of the NVMe-based DB instance classes, that DB instance automatically uses Aurora Optimized Reads.

> **Optimized Reads applies to each DB instance separately**
>
> Aurora turns on Optimized Reads for each DB instance based on the DB instance class of that instance. It doesn't turn on Optimized Reads for the DB cluster as a whole. A DB cluster can contain DB instances with NVMe-based classes and DB instances with other classes. In such a cluster, only the DB instances that use an NVMe-based class use Optimized Reads. On the other DB instances, `shared_preload_libraries` doesn't include `aurora_optimized_reads_cache`, and `temp_tablespaces` is empty. To use Optimized Reads on every DB instance in your cluster, modify each DB instance to use an NVMe-based DB instance class.

To turn on Aurora Optimized Reads, do one of the following:

- Create an Aurora PostgreSQL DB cluster using one of the NVMe-based DB instance classes. For more information, see Creating an Amazon Aurora DB cluster.
- Modify the DB instances in an existing Aurora PostgreSQL DB cluster to use one of the NVMe-based DB instance classes. For more information, see Modifying a DB instance in a DB cluster.

Aurora Optimized Reads is available in all Amazon Web Services Regions where one or more of the DB instance classes with local NVMe SSD storage are supported. For more information, see Amazon AuroraDB instance classes.

To switch back to a non-optimized reads Aurora instance, modify the DB instance class of your Aurora instance to the similar instance class without NVMe ephemeral storage for your database workloads. For example, if the current DB instance class is db.r6gd.4xlarge, choose db.r6g.4xlarge to switch back. For more information, see Modifying an Aurora DB instance.

Use cases for Aurora Optimized Reads

Optimized Reads-enabled tiered cache

The following are some use cases that can benefit from Optimized Reads with tiered cache:

- Internet scale applications such as payments processing, billing, e-commerce with strict performance SLAs.
- Real-time reporting dashboards that run hundreds of point queries for metrics/data collection.
- Generative AI applications with the pgvector extension to search exact or nearest neighbors across millions of vector embeddings.

Optimized Reads-enabled temporary objects

The following are some use cases that can benefit from Optimized Reads with temporary objects:

- Analytical queries that include Common Table Expressions (CTEs), derived tables, and grouping operations.
- Read replicas that handle the unoptimized queries for an application.
- On-demand or dynamic reporting queries with complex operations such as GROUP BY and ORDER BY that can't always use appropriate indexes.
- `CREATE INDEX` or `REINDEX` operations for sorting.
- Other workloads that use internal temporary tables.

Monitoring DB instances that use Aurora Optimized Reads

You can monitor your queries that use Optimized Reads-enabled tiered cache with the EXPLAIN command as shown in the following example:

```
Postgres=> EXPLAIN (ANALYZE, BUFFERS) SELECT c FROM sbtest15 WHERE id=100000000


QUERY PLAN
------------------------------------------------------------------------------------------
 Index Scan using sbtest15_pkey on sbtest15  (cost=0.57..8.59 rows=1 width=121) (actual
 time=0.287..0.288 rows=1 loops=1)
   Index Cond: (id = 100000000)
   Buffers: shared hit=3 read=2 aurora_orcache_hit=2
   I/O Timings: shared/local read=0.264
 Planning:
   Buffers: shared hit=33 read=6 aurora_orcache_hit=6
   I/O Timings: shared/local read=0.607
 Planning Time: 0.929 ms
 Execution Time: 0.303 ms
```

```
(9 rows)
Time: 2.028 ms
```

> **Note**
>
> `aurora_orcache_hit` and `aurora_storage_read` fields in the `Buffers` section of the explain plan are shown only when Optimized Reads is turned on and their values are greater than zero. The read field is the total of the `aurora_orcache_hit` and `aurora_storage_read` fields.

You can monitor DB instances that use Aurora Optimized Reads using the following CloudWatch metrics:

- `AuroraOptimizedReadsCacheHitRatio`
- `FreeEphemeralStorage`
- `ReadIOPSEphemeralStorage`
- `ReadLatencyEphemeralStorage`
- `ReadThroughputEphemeralStorage`
- `WriteIOPSEphemeralStorage`
- `WriteLatencyEphemeralStorage`
- `WriteThroughputEphemeralStorage`

These metrics provide data about available instance store storage, IOPS, and throughput. For more information about these metrics, see Instance-level metrics for Amazon Aurora.

You can also use the `pg_proctab` extension to monitor NVMe storage.

```
postgres=>select * from pg_diskusage();

major | minor |       devname       | reads_completed | reads_merged | sectors_read |
 readtime | writes_completed | writes_merged | sectors_written | writetime | current_io
 | iotime  | totaliotime
------+-------+---------------------+-----------------+--------------+--------------
+----------+------------------+---------------+-----------------+-----------
+------------+---------+-------------
```

```
      |       | rdstemp              |           23264 |            0 |       191450 |
  11670 |          1750892 |             0 |        24540576 |    819350 |          0 |
 3847580 |      831020
      |       | rdsephemeralstorage |           23271 |            0 |       193098 |
   2620 |           114961 |             0 |        13845120 |    130770 |          0 |
  215010 |      133410
(2 rows)
```

Best practices for Aurora Optimized Reads

Use the following best practices for Aurora Optimized Reads:

- Monitor the storage space available on the instance store with the CloudWatch metric `FreeEphemeralStorage`. If the instance store is reaching its limit because of the workload on the DB instance, tune the concurrency and queries which heavily use temporary objects or modify it to use a larger DB instance class.
- Monitor the CloudWatch metric for the Optimized Reads cache hit rate. Operations like VACUUM modify large numbers of blocks very quickly. This can cause a temporary drop in the hit ratio. The `pg_prewarm` extension can be used to load data into the buffer cache that allows Aurora to proactively write some of those blocks to the Optimized Reads cache.
- You can enable cluster cache management (CCM) to warm up the buffer cache and tiered cache on a tier-0 reader, which will be used as a failover target. When CCM is enabled, the buffer cache is periodically scanned to write pages eligible for eviction in tiered cache. For more information on CCM, see Fast recovery after failover with cluster cache management for Aurora PostgreSQL.

Optimizing correlated subqueries in Aurora PostgreSQL

A correlated subquery references table columns from the outer query. It is evaluated once for every row returned by the outer query. In the following example, the subquery references a column from table ot. This table is not included in the subquery's FROM clause, but it is referenced in the outer query's FROM clause. If table ot has 1 million rows, the subquery needs to be evaluated 1 million times.

```
SELECT ot.a, ot.b FROM ot WHERE ot.b < (SELECT AVG(it.b) FROM it WHERE it.a = ot.a);
```

Note

- Subquery transformation and subquery cache are available in Aurora PostgreSQL beginning with version 16.8, while Babelfish for Aurora PostgreSQL supports these features from 4.2.0.
- Starting with Babelfish for Aurora PostgreSQL versions 4.6.0 and 5.2.0, the following parameters control these features:
  - babelfishpg_tsql.apg_enable_correlated_scalar_transform
  - babelfishpg_tsql.apg_enable_subquery_cache

  By default, both parameters are turned on.

Improving Aurora PostgreSQL query performance using subquery transformation

Aurora PostgreSQL can accelerate correlated subqueries by transforming them into equivalent outer joins. This optimization applies to the following two types of correlated subqueries:

- Subqueries that return a single aggregate value and appear in the SELECT list.

```
SELECT ot.a, ot.b, (SELECT AVG(it.b) FROM it WHERE it.a = ot.a) FROM ot;
```

- Subqueries that return a single aggregate value and appear in a WHERE clause.

```
SELECT ot.a, ot.b FROM ot WHERE ot.b < (SELECT AVG(it.b) FROM it WHERE it.a = ot.a);
```

Enabling transformation in the subquery

To enable the transformation of correlated subqueries into equivalent outer joins, set the `apg_enable_correlated_scalar_transform` parameter to `ON`. The default value of this parameter is `OFF`.

You can modify the cluster or instance parameter group to set the parameters. To learn more, see Parameter groups for Amazon Aurora.

Alternatively, you can configure the setting for just the current session by the following command:

```
SET apg_enable_correlated_scalar_transform TO ON;
```

Verifying the transformation

Use the EXPLAIN command to verify if the correlated subquery has been transformed into an outer join in the query plan.

When the transformation is enabled, the applicable correlated subquery part will be transformed into outer join. For example:

```
postgres=> CREATE TABLE ot (a INT, b INT);
CREATE TABLE
postgres=> CREATE TABLE it (a INT, b INT);
CREATE TABLE

postgres=> SET apg_enable_correlated_scalar_transform TO ON;
SET
postgres=> EXPLAIN (COSTS FALSE) SELECT ot.a, ot.b FROM ot WHERE ot.b < (SELECT
 AVG(it.b) FROM it WHERE it.a = ot.a);

                        QUERY PLAN
------------------------------------------------------------
 Hash Join
   Hash Cond: (ot.a = apg_scalar_subquery.scalar_output)
   Join Filter: ((ot.b)::numeric < apg_scalar_subquery.avg)
   ->  Seq Scan on ot
   ->  Hash
         ->  Subquery Scan on apg_scalar_subquery
               ->  HashAggregate
                     Group Key: it.a
                     ->  Seq Scan on it
```

The same query is not transformed when the GUC parameter is turned OFF. The plan will not have outer join but subplan instead.

```
postgres=> SET apg_enable_correlated_scalar_transform TO OFF;
SET
postgres=> EXPLAIN (COSTS FALSE) SELECT ot.a, ot.b FROM ot WHERE ot.b < (SELECT
 AVG(it.b) FROM it WHERE it.a = ot.a);
               QUERY PLAN
----------------------------------------
 Seq Scan on ot
   Filter: ((b)::numeric < (SubPlan 1))
   SubPlan 1
     ->  Aggregate
```

```
            ->  Seq Scan on it
                  Filter: (a = ot.a)
```

Limitations

- The subquery must be in the SELECT list or in one of the conditions in the where clause. Otherwise, it won't be transformed.
- The subquery must return an aggregate function. User-defined aggregate functions aren't supported for transformation.
- A subquery whose return expression isn't a simple aggregate function won't be transformed.
- The correlated condition in subquery WHERE clauses should be a simple column reference. Otherwise, it won't be transformed.
- The correlated condition in subquery where clauses must be a plain equality predicate.
- The subquery can't contain either a HAVING or a GROUP BY clause.
- The where clause in the subquery may contain one or more predicates combined with AND.

> **Note**
>
> The performance impact of transformation varies depending on your schema, data, and workload. Correlated subquery execution with transformation can significantly improve performance as the number of rows produced by the outer query increases. We strongly recommend that you test this feature in a non-production environment with your actual schema, data, and workload before enabling it in a production environment.

Using subquery cache to improve Aurora PostgreSQL query performance

Aurora PostgreSQL supports subquery cache to store the results of correlated subqueries. This feature skips repeated correlated subquery executions when subquery results are already in the cache.

Understanding subquery cache

PostgreSQL's Memoize node is the key part of subquery cache. The Memoize node maintains a hash table in local cache to map from input parameter values to query result rows. The memory limit for the hash table is the product of work_mem and hash_mem_multiplier. To learn more, see Resource Consumption.

During query execution, subquery cache uses Cache Hit Rate (CHR) to estimate whether the cache is improving query performance and to decide at query runtime whether to continue using the cache. CHR is the ratio of the number of cache hits to the total number of requests. For example, if a correlated subquery needs to be executed 100 times, and 70 of those execution results can be retrieved from the cache, the CHR is 0.7.

For every apg_subquery_cache_check_interval number of cache misses, the benefit of subquery cache is evaluated by checking whether the CHR is larger than apg_subquery_cache_hit_rate_threshold. If not, the cache will be deleted from memory, and the query execution will return to the original, uncached subquery re-execution.

Parameters that control subquery cache behavior

The following table lists the parameters that control the behavior of the subquery cache.

Parameter	Description	Default	Allowed
apg_enable_subquery_cache	Enables the use of cache for correlated scalar subqueries.	OFF	ON, OFF
apg_subquery_cache_check_interval	Sets the frequency, in number of cache misses, to evaluate subquery cache hit rate.	500	0–2147483647
apg_subquery_cache_hit_rate_threshold	Sets the threshold for subquery cache hit rate.	0.3	0.0–1.0

Note

- Larger values of `apg_subquery_cache_check_interval` may improve the accuracy of the CHR-based cache benefit estimation, but will increase the cache overhead, since CHR won't get evaluated until the cache table has `apg_subquery_cache_check_interval` rows.

- Larger values of apg_subquery_cache_hit_rate_threshold bias towards abandoning subquery cache and returning back to the original, uncached subquery re-execution.

You can modify the cluster or instance parameter group to set the parameters. To learn more, see Parameter groups for Amazon Aurora.

Alternatively, you can configure the setting for just the current session by the following command:

```
SET apg_enable_subquery_cache TO ON;
```

Turning on subquery cache in Aurora PostgreSQL

When subquery cache is enabled, Aurora PostgreSQL applies cache to save subquery results. The query plan will then have a Memoize node under SubPlan.

For example, the following command sequence shows the estimated query execution plan of a simple correlated subquery without subquery cache.

```
postgres=> SET apg_enable_subquery_cache TO OFF;
SET
postgres=> EXPLAIN (COSTS FALSE) SELECT ot.a, ot.b FROM ot WHERE ot.b < (SELECT it.b
 FROM it WHERE it.a = ot.a);

             QUERY PLAN
-----------------------------------
 Seq Scan on ot
   Filter: (b < (SubPlan 1))
   SubPlan 1
     ->  Seq Scan on it
           Filter: (a = ot.a)
```

After turning on apg_enable_subquery_cache, the query plan will contain a Memoize node under the SubPlan node, indicating that the subquery is planning to use cache.

```
postgres=> SET apg_enable_subquery_cache TO ON;
SET
postgres=> EXPLAIN (COSTS FALSE) SELECT ot.a, ot.b FROM ot WHERE ot.b < (SELECT it.b
 FROM it WHERE it.a = ot.a);
```

```
              QUERY PLAN
-----------------------------------
 Seq Scan on ot
   Filter: (b < (SubPlan 1))
   SubPlan 1
     ->  Memoize
           Cache Key: ot.a
           Cache Mode: binary
           ->  Seq Scan on it
                 Filter: (a = ot.a)
```

The actual query execution plan contains more details of the subquery cache, including cache hits and cache misses. The following output shows the actual query execution plan of the above example query after inserting some values to the tables.

```
postgres=> EXPLAIN (COSTS FALSE, TIMING FALSE, ANALYZE TRUE) SELECT ot.a, ot.b FROM ot
 WHERE ot.b < (SELECT it.b FROM it WHERE it.a = ot.a);
            QUERY PLAN
-------------------------------------------------------------------------------
 Seq Scan on ot (actual rows=2 loops=1)
   Filter: (b < (SubPlan 1))
   Rows Removed by Filter: 8
   SubPlan 1
     ->  Memoize (actual rows=0 loops=10)
           Cache Key: ot.a
           Cache Mode: binary
           Hits: 4  Misses: 6  Evictions: 0  Overflows: 0  Memory Usage: 1kB
           ->  Seq Scan on it (actual rows=0 loops=6)
                 Filter: (a = ot.a)
                 Rows Removed by Filter: 4
```

The total cache hit number is 4, and the total cache miss number is 6. If the total number of hits and misses is less than the number of loops in the Memoize node, it means that the CHR evaluation did not pass and the cache was cleaned up and abandoned at some point. The subquery execution then returned back to the original uncached re-execution.

Limitations

Subquery cache does not support certain patterns of correlated subqueries. Those types of queries will be run without cache, even if subquery cache is turned on:

- IN/EXISTS/ANY/ALL correlated subqueries

- Correlated subqueries containing nondeterministic functions.
- Correlated subqueries that reference outer table columns with datatypes that don't support hashing or equality operations.

Improving Aurora PostgreSQL query performance using subquery window transformation

Aurora PostgreSQL can accelerate correlated aggregate subqueries by transforming them into equivalent window functions. This optimization applies to scalar correlated subqueries in a WHERE clause that compare an outer expression against an aggregate, such as the following query pattern:

```
SELECT o.id, o.amount
FROM orders o, products p
WHERE p.id = o.product_id
  AND o.amount < (
    SELECT 0.2 * avg(o2.amount)
    FROM orders o2
    WHERE o2.product_id = p.id
  );
```

The transformation is a plan-level rewrite that changes only the execution plan, not the query results.

> **Note**
>
> Subquery window transformation is available in Aurora PostgreSQL beginning with version 18.6, while Babelfish for Aurora PostgreSQL supports this feature from 6.2.0 onwards. For Babelfish for Aurora PostgreSQL, the feature is controlled by the `babelfishpg_tsql.apg_enable_subquery_to_window_transform` parameter, which is turned `ON` by default.

When to use subquery window transformation

Consider enabling this transformation if you have queries that match the self-correlation pattern: an outer row compared against an aggregate computed over the same table with a correlation condition.

This transformation is complementary to the existing correlated subquery transformation, which rewrites correlated subqueries as outer joins. The subquery window transformation rewrites them as window functions instead. The two transformations cover different patterns:

- The correlated subquery transformation applies to subqueries in both the SELECT list and the WHERE clause. The subquery must return an aggregate function such as `avg(x)` or `count(*)`, without any surrounding expression.
- The subquery window transformation applies only to WHERE-clause subqueries that use the self-correlation pattern, where the subquery's table also appears in the outer FROM. It additionally supports cases where the aggregate is combined with a constant factor (for example, `0.2 * avg(o2.amount)`) that the correlated subquery transformation can't handle.

You can enable both transformations at the same time. When a query qualifies for both, the subquery window transformation is applied; when it qualifies for only one, that transformation is applied.

Enabling subquery window transformation

To enable the transformation of correlated aggregate subqueries into window functions, set the `apg_enable_subquery_to_window_transform` parameter to `ON`. The default value of this parameter is `OFF`.

You can modify the cluster or instance parameter group to set the parameters. To learn more, see Parameter groups for Amazon Aurora.

Alternatively, you can configure the setting for just the current session by the following command:

```
SET apg_enable_subquery_to_window_transform TO ON;
```

To disable the transformation, set the parameter to `OFF` using the same methods. Changes take effect without an instance reboot; session-level SET is immediate, and parameter-group changes apply to new connections.

> **Note**
>
> For Babelfish for Aurora PostgreSQL, only `babelfishpg_tsql.apg_enable_subquery_to_window_transform` controls whether the transformation applies. The

`apg_enable_subquery_to_window_transform` parameter has no effect under the T-SQL dialect.

Verifying the transformation

Use the EXPLAIN command to verify if the correlated subquery has been transformed into a window function in the query plan.

When the transformation is enabled, the query plan contains a `WindowAgg` node instead of a `SubPlan` node. For example:

```
postgres=> SET apg_enable_subquery_to_window_transform TO ON;
SET
postgres=> EXPLAIN (COSTS FALSE)
SELECT o.id, o.amount
FROM orders o, products p
WHERE p.id = o.product_id
  AND o.amount < (
    SELECT 0.2 * avg(o2.amount)
    FROM orders o2
    WHERE o2.product_id = p.id
  );

                      QUERY PLAN
-------------------------------------------------------
 Subquery Scan on _sw
   Filter: (_sw.amount < (0.2 * _sw._w_agg_result))
   ->  WindowAgg
         Window: w1 AS (PARTITION BY o.product_id)
         ->  Sort
               Sort Key: o.product_id
               ->  Hash Join
                     Hash Cond: (o.product_id = p.id)
                     ->  Seq Scan on orders o
                     ->  Hash
                           ->  Seq Scan on products p
```

The same query is not transformed when the GUC parameter is turned `OFF`. The plan will not have a `WindowAgg` node but a `SubPlan` instead.

```
postgres=> SET apg_enable_subquery_to_window_transform TO OFF;
```

```
SET
postgres=> EXPLAIN (COSTS FALSE)
SELECT o.id, o.amount
FROM orders o, products p
WHERE p.id = o.product_id
  AND o.amount < (
    SELECT 0.2 * avg(o2.amount)
    FROM orders o2
    WHERE o2.product_id = p.id
  );

                QUERY PLAN
------------------------------------------
 Hash Join
   Hash Cond: (o.product_id = p.id)
   Join Filter: (o.amount < (SubPlan 1))
   ->  Seq Scan on orders o
   ->  Hash
         ->  Seq Scan on products p
   SubPlan 1
     ->  Aggregate
           ->  Seq Scan on orders o2
                 Filter: (product_id = p.id)
```

Note

For Babelfish for Aurora PostgreSQL, use the following commands to verify the transformation.

To turn the transformation on or off within a session:

```
SELECT set_config('babelfishpg_tsql.apg_enable_subquery_to_window_transform',
 'true', false);
SELECT set_config('babelfishpg_tsql.apg_enable_subquery_to_window_transform',
 'false', false);
```

To view the query plan:

```
SET BABELFISH_SHOWPLAN_ALL ON
-- run your query
SET BABELFISH_SHOWPLAN_ALL OFF
```

Limitations

If a query doesn't meet these conditions, it runs with its original plan; no error is raised.

- The transformation applies only to a scalar subquery in the outer query's WHERE clause. Subqueries in the SELECT list, and subqueries nested inside an OR condition, aren't transformed. AND with other predicates is supported.
- The subquery's FROM clause must reference exactly one table, and that same table must appear exactly once in the outer query's FROM clause. References through a view or CTE don't count as the same table.
- The outer query must use only inner joins throughout. Outer joins, LATERAL references, CTEs, window functions, and grouping sets (CUBE, ROLLUP, GROUPING SETS) anywhere in the outer query disqualify it.
- The subquery target must be a supported built-in aggregate (SUM, COUNT, AVG, MIN, or MAX), optionally combined with literal constants (for example, `0.2 * avg(o2.amount)`). Ordered-set and user-defined aggregates such as ARRAY_AGG, STRING_AGG, JSON_AGG, and PERCENTILE_CONT aren't supported.
- The correlated predicate must be a plain equality (=) between simple column references on both sides. Compound keys (multiple ANDed equalities) are allowed as long as every outer-side column belongs to the same outer table. Additional non-correlated predicates on the subquery table may be combined with AND.
- The subquery can't contain a GROUP BY, HAVING, LIMIT, ORDER BY, DISTINCT, or FOR UPDATE clause; set operations (UNION, INTERSECT, EXCEPT); set-returning functions; window functions; CTEs; nested subqueries; or volatile functions such as `random()` or `clock_timestamp()`.
- The join between the correlated table and any other outer table must be on a column with a primary-key or unique constraint, so that at most one row from the other outer table matches each row from the correlated table.

> **Note**
>
> The performance impact of the transformation varies depending on your schema, data, and workload. Correlated subquery execution with window function transformation can significantly improve performance as the number of rows produced by the outer query increases. We strongly recommend that you test this feature in a non-production

environment with your actual schema, data, and workload before enabling it in a production environment.

Improving query performance using adaptive join

Overview

Adaptive join is a preview feature in Aurora PostgreSQL 17.4 that helps improve query performance. This feature is disabled by default, but you can enable it using Global User Configuration (GUC) parameters. Since this is a preview feature, the default parameter values might change. When enabled, adaptive join helps optimize query performance by dynamically switching from a nested loop join to a hash join at runtime. This switch occurs when the PostgreSQL optimizer has incorrectly chosen a nested loop join due to inaccurate cardinality estimates.

Configuring adaptive join

You can control adaptive join using these three GUC parameters:

Adaptive join configuration parameters

GUC parameter	Description	Default and configuration options
apg_adaptive_join_ crossover_multiplier	This multiplier works with the *row crossover point* to determine when to switch from a nested loop to a hash join. The row crossover point is where the SQL optimizer estimates that nested loop and hash join operations have equal cost. A higher multiplier value reduces the likelihood of adaptive join switching to a hash join.	Controls whether Adaptive Join is enabled • Default value: -1 (disabled) • Valid range: -1 to DBL_MAX • To enable: Set to >= 1
apg_adaptive_join_ cost_threshold	This parameter sets a minimum query cost threshold. Adaptive join automatically disables itself for	Sets minimum cost threshold for the query

GUC parameter	Description	Default and configuration options
	queries below this threshold. This prevents performance overhead in simple queries where the cost of planning an adaptive join could exceed the benefits of switching from nested loop to hash join.	• Default value: 100 • Valid range: 0 to DBL_MAX

apg_enable_parameterized_adaptive_join	This parameter extends adaptive join functionality to parameterized nested loop joins when enabled. By default, adaptive join works only with unparameterized nested loop joins, as these are more likely to benefit from switching to hash join. Parameterized nested loop joins typically perform better, making the switch to hash join less critical.	Controls adaptive join behavior for nested loop joins
		• Default value: false
		• Valid values: true/false
		  • When false: Works only with unparameterized nested loop joins
		  • When true: Works with both parameterized and unparameterized nested loop joins
		Note
		Requires `apg_adaptive_join_crossover_multiplier` to be enabled first

Using shared plan cache

Overview

Aurora PostgreSQL uses a process-per-user model where each client connection creates a dedicated backend process. Each backend process maintains its own local plan cache for prepared statements. Because these caches can't be shared between processes, applications that use many prepared statements might create duplicate caches across different backend processes, which leads to increased memory usage.

Aurora PostgreSQL versions 17.6 and later and 16.10 and later introduce shared plan cache functionality. When you enable this feature, backend processes can share generic plans, which reduces memory usage and improves performance by eliminating duplicate plan generation.

> **Note**
>
> Babelfish for Aurora PostgreSQL supports shared plan cache starting from versions 4.10 and 5.6.

The shared plan cache uses the following components as its cache key:

- Query string (including comments)
- Planner-related GUC parameters (including `search_path`)
- User ID
- Database ID

Instance restarts reset the shared cache.

Parameters

The following table describes the parameters that control the shared plan cache feature:

Parameter	Description	Default	Allowed
`apg_shared_plan_cache.enable`	Turns shared plan cache on or off	0 (OFF)	0, 1

Parameter	Description	Default	Allowed
apg_shared_plan_cache.max	The maximum number of cache entries	200–1000 (instance size dependent)	100–50000
apg_shared_plan_cache.min_size_per_entry	The minimum plan size to store in shared cache. Smaller plans use local cache to optimize OLTP performance.	16 KB	0–32768 (KB)
apg_shared_plan_cache.max_size_per_entry	The maximum plan size for shared cache. Larger plans store only cost information.	256 KB–4 MB (instance size dependent)	0–32768 (KB)
apg_shared_plan_cache.idle_generic_plan_release_timeout	The time after which idle sessions release local generic plans. Lower values save memory; higher values might improve performance.	10 seconds	0–2147483647 (ms)

Note

You can modify all parameters without restarting.

Monitoring views and functions

- `apg_shared_plan_cache()` – Shows detailed cache entry information (hits, validity, timestamps)
- `apg_shared_plan_cache_stat()` – Displays instance-level statistics (evictions, invalidations)

- `apg_shared_plan_cache_reset()` – Removes all entries in `apg_shared_plan_cache()` and `apg_shared_plan_cache_stat()`
- `apg_shared_plan_cache_remove(cache_key)` – Removes an entry from `apg_shared_plan_cache()` where the entry matches the `cache_key`

Limitations

- Only works with prepared statements and doesn't cache PL/pgSQL statements
- Doesn't cache a query that contains temporary tables or catalog tables
- Doesn't cache a query that depends on RLS (Row-Level Security) or `pg_columnmask` masking
- Each replica maintains its own cache (no cross-replica sharing)

Working with unlogged tables in Aurora PostgreSQL

Amazon Aurora PostgreSQL supports unlogged tables that are crash-safe and maintain data integrity even after writer instance failures or failovers. In standard PostgreSQL, unlogged tables bypass the Write-Ahead Log (WAL) during write operations, resulting in faster write speeds. However, this comes at the cost of reduced durability, as unlogged tables are not crash-safe and can lose data after a system failure or unclean shutdown. These unlogged tables are automatically truncated after a crash or unclean shutdown. Their contents and indexes are also not replicated to standby servers.

In contrast, Aurora PostgreSQL handles unlogged tables differently due to its distributed storage architecture. This is because the Aurora storage system does not rely on the traditional PostgreSQL WAL for durability. However, the performance benefits typically associated with unlogged tables in standard PostgreSQL may not be as significant in Aurora. This is because of the Aurora distributed storage architecture, which can introduce additional overhead compared to the local storage used in standard PostgreSQL.

When using unlogged tables in Aurora PostgreSQL, consider the following:

- You can access unlogged tables only from the writer node in the Aurora DB cluster.
- Reader nodes can access unlogged tables only when promoted to writer status.
- When you try to access unlogged tables from a reader node, it will result in the following error:

```
cannot access temporary or unlogged relations during recovery.
```

Creating unlogged tables

To create an unlogged table in Aurora PostgreSQL, add the UNLOGGED keyword in your CREATE TABLE statement:

```
CREATE UNLOGGED TABLE staging_sales_data (
    transaction_id bigint,
    customer_id bigint,
    product_id bigint,
    transaction_date date,
    amount NUMERIC
);
```

Handling unlogged tables during migration

When preparing to migrate data to Aurora PostgreSQL, it's important to identify and handle unlogged tables appropriately. Unlogged tables are not WAL-logged and are excluded from the replication stream, meaning they will not be replicated to an Aurora read replica.

Convert unlogged tables to logged tables or drop them if they are not being used before creating an Aurora read replica.

To verify the presence of unlogged tables in each database within the instance, use the following command:

```
SELECT oid, relfilenode, relname, relpersistence, relkind
FROM pg_class
WHERE relpersistence ='u';
```

To convert an unlogged table back to a logged table, use the following command:

```
ALTER TABLE table_name SET LOGGED;
```

This operation rewrites the entire table and places an exclusive lock on it until completion. For large tables, this may result in significant downtime.

Converting unlogged tables to logged tables

When you need to convert an unlogged table back to a logged table, you can use the following command:

```
ALTER TABLE table_name SET LOGGED;
```

This operation rewrites the entire table and places an exclusive lock on it until the operation completes. For large tables, this can result in significant downtime.

Unlogged tables and logical replication

Unlogged tables are generally not included in logical replication because logical replication relies on the WAL to capture and transfer changes. By default, changes to unlogged tables are not WAL-logged and excluded from the replication stream, making them unsuitable for use cases where logical replication is required. However, Aurora PostgreSQL provides a parameter called `rds.logically_replicate_unlogged_tables` that allows you to control this behavior:

- When `rds.logically_replicate_unlogged_tables` is set to 0 (off) the unlogged tables are excluded from logical replication.
- When `rds.logically_replicate_unlogged_tables` is set to 1 (on) the unlogged tables are included in logical replication.

> **Note**
>
> In Aurora PostgreSQL, the `rds.logically_replicate_unlogged_tables` parameter is set by default to 1 (on) in versions 14 and earlier, and to 0 (off) in versions 15 and later.

Working with PostgreSQL autovacuum on Amazon Aurora PostgreSQL

We strongly recommend that you use the autovacuum feature to maintain the health of your PostgreSQL DB instance. Autovacuum automates the start of the VACUUM and the ANALYZE

commands. It checks for tables with a large number of inserted, updated, or deleted tuples. After this check, it reclaims storage by removing obsolete data or tuples from the PostgreSQL database.

By default, autovacuum is turned on for the Aurora PostgreSQL DB instances that you create using any of the default PostgreSQL DB parameter groups. Other configuration parameters associated with the autovacuum feature are also set by default. Because these defaults are somewhat generic, you can benefit from tuning some of the parameters associated with the autovacuum feature for your specific workload.

Following, you can find more information about the autovacuum and how to tune some of its parameters on your Aurora PostgreSQL DB instance.

Topics

- Allocating memory for autovacuum
- Reducing the likelihood of transaction ID wraparound
- Determining if the tables in your database need vacuuming
- Determining which tables are currently eligible for autovacuum
- Determining if autovacuum is currently running and for how long
- Performing a manual vacuum freeze
- Reindexing a table when autovacuum is running
- Managing autovacuum with large indexes
- Other parameters that affect autovacuum
- Setting table-level autovacuum parameters
- Logging autovacuum and vacuum activities
- Understanding the behavior of autovacuum with invalid databases
- Identify and resolve aggressive vacuum blockers in Aurora PostgreSQL
- Adaptive autovacuum enhancements in PostgreSQL version 18

Allocating memory for autovacuum

One of the most important parameters influencing autovacuum performance is the `autovacuum_work_mem` parameter. In Aurora PostgreSQL versions 14 and prior, the `autovacuum_work_mem` parameter is set to -1, indicating that the setting of `maintenance_work_mem` is used instead. For all other versions, `autovacuum_work_mem` is determined by GREATEST({DBInstanceClassMemory/32768}, 65536).

Manual vacuum operations always use the `maintenance_work_mem` setting, with a default setting of GREATEST({DBInstanceClassMemory/63963136*1024}, 65536), and it can also be adjusted at the session level using the SET command for more targeted manual `VACUUM` operations.

The `autovacuum_work_mem` determines memory for autovacuum to hold identifiers of dead tuples (`pg_stat_all_tables.n_dead_tup`) for vacuuming indexes.

When doing calculations to determine the `autovacuum_work_mem` parameter's value, be aware of the following:

- If you set the parameter too low, the vacuum process might have to scan the table multiple times to complete its work. Such multiple scans can have a negative impact on performance. For larger instances, setting `maintenance_work_mem` or `autovacuum_work_mem` to at least 1 GB can improve the performance of vacuuming tables with a high number of dead tuples. However, in PostgreSQL versions 16 and prior, vacuum's memory usage is capped at 1 GB, which is sufficient to process approximately 179 million dead tuples in a single pass. If a table has more dead tuples than this, vacuum will need to make multiple passes through the table's indexes, significantly increasing the time required. Starting with PostgreSQL version 17, there isn't a limit of 1 GB, and autovacuum can process more than 179 million tuples by using radix trees.

  A tuple identifier is 6 bytes in size. To estimate the memory needed for vacuuming an index of a table, query `pg_stat_all_tables.n_dead_tup` to find the number of dead tuples, then multiply this number by 6 to determine the memory required for vacuuming the index in a single pass. You may use the following query:

  ```
  SELECT
      relname AS table_name,
      n_dead_tup,
      pg_size_pretty(n_dead_tup * 6) AS estimated_memory
  FROM
      pg_stat_all_tables
  WHERE
      relname = 'name_of_the_table';
  ```

- The `autovacuum_work_mem` parameter works in conjunction with the `autovacuum_max_workers` parameter. Each worker among `autovacuum_max_workers` can use the memory that you allocate. If you have many small tables, allocate more `autovacuum_max_workers` and less `autovacuum_work_mem`. If you have large tables (larger than 100 GB), allocate more memory and fewer worker processes. You need to have enough

memory allocated to succeed on your biggest table. Thus, make sure that the combination of worker processes and memory equals the total memory that you want to allocate.

Reducing the likelihood of transaction ID wraparound

In some cases, parameter group settings related to autovacuum might not be aggressive enough to prevent transaction ID wraparound. To address this, Aurora PostgreSQL provides a mechanism that adapts the autovacuum parameter values automatically. *Adaptive autovacuum* is a feature for Aurora PostgreSQL. A detailed explanation of TransactionID wraparound is found in the PostgreSQL documentation.

Adaptive autovacuum is turned on by default for Aurora PostgreSQL instances with the dynamic parameter `rds.adaptive_autovacuum` set to ON. We strongly recommend that you keep this turned on. However, to turn off adaptive autovacuum parameter tuning, set the `rds.adaptive_autovacuum` parameter to 0 or OFF.

Transaction ID wraparound is still possible even when Aurora Amazon RDS tunes the autovacuum parameters. We encourage you to implement an Amazon CloudWatch alarm for transaction ID wraparound. For more information, see the post Implement an early warning system for transaction ID wraparound in RDS for PostgreSQL on the Amazon Database Blog.

With adaptive autovacuum parameter tuning turned on, Amazon RDS begins adjusting autovacuum parameters when the CloudWatch metric `MaximumUsedTransactionIDs` reaches the value of the `autovacuum_freeze_max_age` parameter or 500,000,000, whichever is greater.

Amazon RDS continues to adjust parameters for autovacuum if a table continues to trend toward transaction ID wraparound. Each of these adjustments dedicates more resources to autovacuum to avoid wraparound. Amazon RDS updates the following autovacuum-related parameters:

- autovacuum_vacuum_cost_delay
- autovacuum_vacuum_cost_limit
- `autovacuum_work_mem`
- autovacuum_naptime

RDS modifies these parameters only if the new value makes autovacuum more aggressive. The parameters are modified in memory on the DB instance. The values in the parameter group aren't changed. To view the current in-memory settings, use the PostgreSQL SHOW SQL command.

When Amazon RDS modifies any of these autovacuum parameters, it generates an event for the affected DB instance. This event is visible on the Amazon Web Services Management Console and through the Amazon RDS API. For more information about RDS events, see Amazon RDS event categories and event messages. To receive notifications when these events occur, see Subscribing to Amazon RDS event notification. After the `MaximumUsedTransactionIDs` CloudWatch metric returns below the threshold, Amazon RDS resets the autovacuum-related parameters in memory back to the values specified in the parameter group. It then generates another event corresponding to this change.

Determining if the tables in your database need vacuuming

You can use the following query to show the number of unfrozen transactions in a database. The `datfrozenxid` column of a database's `pg_database` row is a lower bound on the normal transaction IDs appearing in that database. This column is the minimum of the per-table `relfrozenxid` values within the database.

```
SELECT datname, age(datfrozenxid) FROM pg_database ORDER BY age(datfrozenxid) desc
 limit 20;
```

For example, the results of running the preceding query might be the following.

```
datname    | age
mydb       | 1771757888
template0  | 1721757888
template1  | 1721757888
rdsadmin   | 1694008527
postgres   | 1693881061
(5 rows)
```

When the age of a database reaches 2 billion transaction IDs, transaction ID (XID) wraparound occurs and the database becomes read-only. You can use this query to produce a metric and run a few times a day. By default, autovacuum is set to keep the age of transactions to no more than 200,000,000 (`autovacuum_freeze_max_age`).

A sample monitoring strategy might look like this:

- Set the `autovacuum_freeze_max_age` value to 200 million transactions.
- If a table reaches 500 million unfrozen transactions, that triggers a low-severity alarm. This isn't an unreasonable value, but it can indicate that autovacuum isn't keeping up.

- If a table ages to 1 billion, this should be treated as an alarm to take action on. In general, you want to keep ages closer to `autovacuum_freeze_max_age` for performance reasons. We recommend that you investigate using the recommendations that follow.
- If a table reaches 1.5 billion unvacuumed transactions, that triggers a high-severity alarm. Depending on how quickly your database uses transaction IDs, this alarm can indicate that the system is running out of time to run autovacuum. In this case, we recommend that you resolve this immediately.

If a table is constantly breaching these thresholds, modify your autovacuum parameters further. By default, using VACUUM manually (which has cost-based delays disabled) is more aggressive than using the default autovacuum, but it is also more intrusive to the system as a whole.

We recommend the following:

- Be aware and turn on a monitoring mechanism so that you are aware of the age of your oldest transactions.

  For information on creating a process that warns you about transaction ID wraparound, see the Amazon Database Blog post Implement an early warning system for transaction ID wraparound in Amazon RDS for PostgreSQL.
- For busier tables, perform a manual vacuum freeze regularly during a maintenance window, in addition to relying on autovacuum. For information on performing a manual vacuum freeze, see Performing a manual vacuum freeze.

Determining which tables are currently eligible for autovacuum

Often, it is one or two tables in need of vacuuming. Tables whose `relfrozenxid` value is greater than the number of transactions in `autovacuum_freeze_max_age` are always targeted by autovacuum. Otherwise, if the number of tuples made obsolete since the last VACUUM exceeds the vacuum threshold, the table is vacuumed.

The autovacuum threshold is defined as:

```
Vacuum-threshold = vacuum-base-threshold + vacuum-scale-factor * number-of-tuples
```

where the `vacuum base threshold` is `autovacuum_vacuum_threshold`, the `vacuum scale factor` is `autovacuum_vacuum_scale_factor`, and the `number of tuples` is `pg_class.reltuples`.

While you are connected to your database, run the following query to see a list of tables that autovacuum sees as eligible for vacuuming.

```
WITH vbt AS (SELECT setting AS autovacuum_vacuum_threshold FROM
pg_settings WHERE name = 'autovacuum_vacuum_threshold'),
vsf AS (SELECT setting AS autovacuum_vacuum_scale_factor FROM
pg_settings WHERE name = 'autovacuum_vacuum_scale_factor'),
fma AS (SELECT setting AS autovacuum_freeze_max_age FROM pg_settings WHERE name =
 'autovacuum_freeze_max_age'),
sto AS (select opt_oid, split_part(setting, '=', 1) as param,
split_part(setting, '=', 2) as value from (select oid opt_oid, unnest(reloptions)
 setting from pg_class) opt)
SELECT '"'||ns.nspname||'"."'||c.relname||'"' as relation,
pg_size_pretty(pg_table_size(c.oid)) as table_size,
age(relfrozenxid) as xid_age,
coalesce(cfma.value::float, autovacuum_freeze_max_age::float)
 autovacuum_freeze_max_age,
(coalesce(cvbt.value::float, autovacuum_vacuum_threshold::float) +
coalesce(cvsf.value::float,autovacuum_vacuum_scale_factor::float) * c.reltuples)
AS autovacuum_vacuum_tuples, n_dead_tup as dead_tuples FROM
pg_class c join pg_namespace ns on ns.oid = c.relnamespace
join pg_stat_all_tables stat on stat.relid = c.oid join vbt on (1=1) join vsf on (1=1)
 join fma on (1=1)
left join sto cvbt on cvbt.param = 'autovacuum_vacuum_threshold' and c.oid =
 cvbt.opt_oid
left join sto cvsf on cvsf.param = 'autovacuum_vacuum_scale_factor' and c.oid =
 cvsf.opt_oid
left join sto cfma on cfma.param = 'autovacuum_freeze_max_age' and c.oid = cfma.opt_oid
WHERE c.relkind = 'r' and nspname <> 'pg_catalog'
AND (age(relfrozenxid) >= coalesce(cfma.value::float, autovacuum_freeze_max_age::float)
OR coalesce(cvbt.value::float, autovacuum_vacuum_threshold::float) +
coalesce(cvsf.value::float,autovacuum_vacuum_scale_factor::float) *
c.reltuples <= n_dead_tup)
ORDER BY age(relfrozenxid) DESC LIMIT 50;
```

Determining if autovacuum is currently running and for how long

If you need to manually vacuum a table, make sure to determine if autovacuum is currently running. If it is, you might need to adjust parameters to make it run more efficiently, or turn off autovacuum temporarily so that you can manually run VACUUM.

Use the following query to determine if autovacuum is running, how long it has been running, and if it is waiting on another session.

```
SELECT datname, usename, pid, state, wait_event, current_timestamp - xact_start AS
 xact_runtime, query
FROM pg_stat_activity
WHERE upper(query) LIKE '%VACUUM%'
ORDER BY xact_start;
```

After running the query, you should see output similar to the following.

```
 datname | usename  |  pid  | state  | wait_event |      xact_runtime       | query
 --------+----------+-------+--------+------------+-------------------------
+-------------------------------------------------------------------------------------------------
 mydb    | rdsadmin | 16473 | active |            | 33 days 16:32:11.600656 |
 autovacuum: VACUUM ANALYZE public.mytable1 (to prevent wraparound)
 mydb    | rdsadmin | 22553 | active |            | 14 days 09:15:34.073141 |
 autovacuum: VACUUM ANALYZE public.mytable2 (to prevent wraparound)
 mydb    | rdsadmin | 41909 | active |            | 3 days 02:43:54.203349  |
 autovacuum: VACUUM ANALYZE public.mytable3
 mydb    | rdsadmin |   618 | active |            | 00:00:00                |
 SELECT datname, usename, pid, state, wait_event, current_timestamp - xact_start AS
 xact_runtime, query+
         |          |       |        |            |                         | FROM
 pg_stat_activity
           +
         |          |       |        |            |                         | WHERE
 query like '%VACUUM%'
          +
         |          |       |        |            |                         | ORDER BY
 xact_start;
       +
```

Several issues can cause a long-running autovacuum session (that is, multiple days long). The most common issue is that your maintenance_work_mem parameter value is set too low for the size of the table or rate of updates.

We recommend that you use the following formula to set the maintenance_work_mem parameter value.

```
GREATEST({DBInstanceClassMemory/63963136*1024},65536)
```

Short running autovacuum sessions can also indicate problems:

- It can indicate that there aren't enough autovacuum_max_workers for your workload. In this case, you need to indicate the number of workers.
- It can indicate that there is an index corruption (autovacuum crashes and restarts on the same relation but makes no progress). In this case, run a manual vacuum freeze verbose *table* to see the exact cause.

Performing a manual vacuum freeze

You might want to perform a manual vacuum on a table that has a vacuum process already running. This is useful if you have identified a table with an age approaching 2 billion transactions (or above any threshold you are monitoring).

The following steps are guidelines, with several variations to the process. For example, during testing, suppose that you find that the maintenance_work_mem parameter value is set too small and that you need to take immediate action on a table. However, perhaps you don't want to bounce the instance at the moment. Using the queries in previous sections, you determine which table is the problem and notice a long running autovacuum session. You know that you need to change the maintenance_work_mem parameter setting, but you also need to take immediate action and vacuum the table in question. The following procedure shows what to do in this situation.

To manually perform a vacuum freeze

1. Open two sessions to the database containing the table you want to vacuum. For the second session, use "screen" or another utility that maintains the session if your connection is dropped.
2. In session one, get the process ID (PID) of the autovacuum session running on the table.

Run the following query to get the PID of the autovacuum session.

```
SELECT datname, usename, pid, current_timestamp - xact_start
AS xact_runtime, query
FROM pg_stat_activity WHERE upper(query) LIKE '%VACUUM%' ORDER BY
xact_start;
```

3. In session two, calculate the amount of memory that you need for this operation. In this example, we determine that we can afford to use up to 2 GB of memory for this operation, so we set `maintenance_work_mem` for the current session to 2 GB.

```
SET maintenance_work_mem='2 GB';
SET
```

4. In session two, issue a `vacuum freeze verbose` command for the table. The verbose setting is useful because, although there is no progress report for this in PostgreSQL currently, you can see activity.

```
\timing on
Timing is on.
vacuum freeze verbose pgbench_branches;
```

```
INFO:  vacuuming "public.pgbench_branches"
INFO:  index "pgbench_branches_pkey" now contains 50 row versions in 2 pages
DETAIL:  0 index row versions were removed.
0 index pages have been deleted, 0 are currently reusable.
CPU 0.00s/0.00u sec elapsed 0.00 sec.
INFO:  index "pgbench_branches_test_index" now contains 50 row versions in 2 pages
DETAIL:  0 index row versions were removed.
0 index pages have been deleted, 0 are currently reusable.
CPU 0.00s/0.00u sec elapsed 0.00 sec.
INFO:  "pgbench_branches": found 0 removable, 50 nonremovable row versions
     in 43 out of 43 pages
DETAIL:  0 dead row versions cannot be removed yet.
There were 9347 unused item pointers.
0 pages are entirely empty.
CPU 0.00s/0.00u sec elapsed 0.00 sec.
VACUUM
Time: 2.765 ms
```

5. In session one, if autovacuum was blocking the vacuum session, `pg_stat_activity` shows that waiting is T for your vacuum session. In this case, end the autovacuum process as follows.

```
SELECT pg_terminate_backend('the_pid');
```

> **Note**
>
> Some lower versions of Amazon Aurora can't terminate an autovacuum process using the preceding command and fail with the following error: `ERROR: 42501: must be a superuser to terminate superuser process LOCATION: pg_terminate_backend, signalfuncs.c:227`. To find the PostgreSQL versions that have been patched, search for the following bullet in Amazon Aurora PostgreSQL updates:
>
> ```
> Allow rds_superuser to terminate backends which are not explicitly
>  associated with a role
> ```

   At this point, your session begins. Autovacuum restarts immediately because this table is probably the highest on its list of work.

6. Initiate your `vacuum freeze verbose` command in session two, and then end the autovacuum process in session one.

Reindexing a table when autovacuum is running

If an index has become corrupt, autovacuum continues to process the table and fails. If you attempt a manual vacuum in this situation, you receive an error message like the following.

```
postgres=>  vacuum freeze pgbench_branches;
ERROR: index "pgbench_branches_test_index" contains unexpected
   zero page at block 30521
HINT: Please REINDEX it.
```

When the index is corrupted and autovacuum is attempting to run on the table, you contend with an already running autovacuum session. When you issue a REINDEX command, you take out an exclusive lock on the table. Write operations are blocked, and also read operations that use that specific index.

To reindex a table when autovacuum is running on the table

1. Open two sessions to the database containing the table that you want to vacuum. For the second session, use "screen" or another utility that maintains the session if your connection is dropped.
2. In session one, get the PID of the autovacuum session running on the table.

   Run the following query to get the PID of the autovacuum session.

   ```
   SELECT datname, usename, pid, current_timestamp - xact_start
   AS xact_runtime, query
   FROM pg_stat_activity WHERE upper(query) like '%VACUUM%' ORDER BY
   xact_start;
   ```

3. In session two, issue the reindex command.

   ```
   \timing on
   Timing is on.
   reindex index pgbench_branches_test_index;
   REINDEX
     Time: 9.966 ms
   ```

4. In session one, if autovacuum was blocking the process, you see in `pg_stat_activity` that waiting is "T" for your vacuum session. In this case, you end the autovacuum process.

   ```
   SELECT pg_terminate_backend('the_pid');
   ```

   At this point, your session begins. It's important to note that autovacuum restarts immediately because this table is probably the highest on its list of work.
5. Initiate your command in session two, and then end the autovacuum process in session 1.

Managing autovacuum with large indexes

As part of its operation, *autovacuum* performs several vacuum phases while running on a table. Before the table is cleaned up, all of its indexes are first vacuumed. When removing multiple large indexes, this phase consumes a significant amount of time and resources. Therefore, as a best practice, be sure to control the number of indexes on a table and eliminate unused indexes.

For this process, first check the overall index size. Then, determine if there are potentially unused indexes that can be removed as shown in the following examples.

To check the size of the table and its indexes

```
postgres=> select pg_size_pretty(pg_relation_size('pgbench_accounts'));
pg_size_pretty
6404 MB
(1 row)
```

```
postgres=> select pg_size_pretty(pg_indexes_size('pgbench_accounts'));
pg_size_pretty
11 GB
(1 row)
```

In this example, the size of indexes is larger than the table. This difference can cause performance issues as the indexes are bloated or unused, which impacts the autovacuum as well as insert operations.

To check for unused indexes

Using the pg_stat_user_indexes view, you can check how frequently an index is used with the `idx_scan` column. In the following example, the unused indexes have the `idx_scan` value of `0`.

```
postgres=> select * from pg_stat_user_indexes where relname = 'pgbench_accounts' order
 by idx_scan desc;

relid  | indexrelid | schemaname | relname          | indexrelname          | idx_scan
 | idx_tup_read | idx_tup_fetch
-------+------------+------------+------------------+-----------------------+----------
+--------------+--------------
16433  | 16454      | public     | pgbench_accounts | index_f               | 6
 | 6            | 0
16433  | 16450      | public     | pgbench_accounts | index_b               | 3
 | 199999       | 0
16433  | 16447      | public     | pgbench_accounts | pgbench_accounts_pkey | 0
 | 0            | 0
16433  | 16452      | public     | pgbench_accounts | index_d               | 0
 | 0            | 0
16433  | 16453      | public     | pgbench_accounts | index_e               | 0
 | 0            | 0
```

```
16433  | 16451      | public     | pgbench_accounts | index_c               | 0
 | 0            | 0
16433  | 16449      | public     | pgbench_accounts | index_a               | 0
 | 0            | 0
(7 rows)
```

```
postgres=> select schemaname, relname, indexrelname, idx_scan from pg_stat_user_indexes
 where relname = 'pgbench_accounts' order by idx_scan desc;

schemaname  | relname          | indexrelname          | idx_scan
------------+------------------+-----------------------+----------
public      | pgbench_accounts | index_f               | 6
public      | pgbench_accounts | index_b               | 3
public      | pgbench_accounts | pgbench_accounts_pkey | 0
public      | pgbench_accounts | index_d               | 0
public      | pgbench_accounts | index_e               | 0
public      | pgbench_accounts | index_c               | 0
public      | pgbench_accounts | index_a               | 0
(7 rows)
```

Note

These statistics are incremental from the time that the statistics are reset. Suppose you have an index that is only used at the end of a business quarter or just for a specific report. It's possible that this index hasn't been used since the statistics were reset. For more information, see Statistics Functions. Indexes that are used to enforce uniqueness won't have scans performed and shouldn't be identified as unused indexes. To identify the unused indexes, you should have in-depth knowledge of the application and its queries.

To check when the stats were last reset for a database, use `pg_stat_database`

```
postgres=> select datname, stats_reset from pg_stat_database where datname =
 'postgres';

datname   | stats_reset
----------+-------------------------------
postgres  | 2022-11-17 08:58:11.427224+00
(1 row)
```

Vacuuming a table as quickly as possible

RDS for PostgreSQL 12 and higher

If you have too many indexes in a large table, your DB instance could be nearing transaction ID wraparound (XID), which is when the XID counter wraps around to zero. Left unchecked, this situation could result in data loss. However, you can quickly vacuum the table without cleaning up the indexes. In RDS for PostgreSQL 12 and higher, you can use VACUUM with the `INDEX_CLEANUP` clause.

```
postgres=> VACUUM (INDEX_CLEANUP FALSE, VERBOSE TRUE) pgbench_accounts;

INFO: vacuuming "public.pgbench_accounts"
INFO: table "pgbench_accounts": found 0 removable, 8 nonremovable row versions in 1 out
 of 819673 pages
DETAIL: 0 dead row versions cannot be removed yet, oldest xmin: 7517
Skipped 0 pages due to buffer pins, 0 frozen pages.
CPU: user: 0.01 s, system: 0.00 s, elapsed: 0.01 s.
```

If an autovacuum session is already running, you must terminate it to begin the manual VACUUM. For information on performing a manual vacuum freeze, see Performing a manual vacuum freeze

> **Note**
>
> Skipping index cleanup regularly causes index bloat, which degrades scan performance. The index retains dead rows, and the table retains dead line pointers. As a result, `pg_stat_all_tables.n_dead_tup` increases until autovacuum or a manual VACUUM with index cleanup runs. As a best practice, use this procedure only to prevent transaction ID wraparound.

RDS for PostgreSQL 11 and older

However, in RDS for PostgreSQL 11 and lower versions, the only way to allow vacuum to complete faster is to reduce the number of indexes on a table. Dropping an index can affect query plans. We recommend that you drop unused indexes first, then drop the indexes when XID wraparound is very near. After the vacuum process completes, you can recreate these indexes.

Other parameters that affect autovacuum

The following query shows the values of some of the parameters that directly affect autovacuum and its behavior. The autovacuum parameters are described fully in the PostgreSQL documentation.

```
SELECT name, setting, unit, short_desc
FROM pg_settings
WHERE name IN (
'autovacuum_max_workers',
'autovacuum_analyze_scale_factor',
'autovacuum_naptime',
'autovacuum_analyze_threshold',
'autovacuum_analyze_scale_factor',
'autovacuum_vacuum_threshold',
'autovacuum_vacuum_scale_factor',
'autovacuum_vacuum_threshold',
'autovacuum_vacuum_cost_delay',
'autovacuum_vacuum_cost_limit',
'vacuum_cost_limit',
'autovacuum_freeze_max_age',
'maintenance_work_mem',
'vacuum_freeze_min_age');
```

While these all affect autovacuum, some of the most important ones are:

- maintenance_work_mem
- autovacuum_freeze_max_age
- autovacuum_max_workers
- autovacuum_vacuum_cost_delay
- autovacuum_vacuum_cost_limit

Setting table-level autovacuum parameters

You can set autovacuum-related storage parameters at a table level, which can be better than altering the behavior of the entire database. For large tables, you might need to set aggressive settings and you might not want to make autovacuum behave that way for all tables.

The following query shows which tables currently have table-level options in place.

```
SELECT relname, reloptions
FROM pg_class
WHERE reloptions IS NOT null;
```

An example where this might be useful is on tables that are much larger than the rest of your tables. Suppose that you have one 300-GB table and 30 other tables less than 1 GB. In this case, you might set some specific parameters for your large table so you don't alter the behavior of your entire system.

```
ALTER TABLE mytable set (autovacuum_vacuum_cost_delay=0);
```

Doing this turns off the cost-based autovacuum delay for this table at the expense of more resource usage on your system. Normally, autovacuum pauses for `autovacuum_vacuum_cost_delay` each time `autovacuum_cost_limit` is reached. For more details, see the PostgreSQL documentation about cost-based vacuuming.

Logging autovacuum and vacuum activities

Information about autovacuum activities is sent to the `postgresql.log` based on the level specified in the `rds.force_autovacuum_logging_level` parameter. Following are the values allowed for this parameter and the PostgreSQL versions for which that value is the default setting:

- `disabled` (PostgreSQL 10, PostgreSQL 9.6)
- debug5, debug4, debug3, debug2, debug1
- `info` (PostgreSQL 12, PostgreSQL 11)
- `notice`
- `warning` (PostgreSQL 13 and above)
- `error`, log, `fatal`, `panic`

The `rds.force_autovacuum_logging_level` works with the `log_autovacuum_min_duration` parameter. The `log_autovacuum_min_duration` parameter's value is the threshold (in milliseconds) above which autovacuum actions get logged. A setting of `-1` logs nothing, while a setting of 0 logs all actions. As with `rds.force_autovacuum_logging_level`, default values for `log_autovacuum_min_duration` are version dependent, as follows:

- `10000 ms` – PostgreSQL 14, PostgreSQL 13, PostgreSQL 12, and PostgreSQL 11
- `(empty)` – No default value for PostgreSQL 10 and PostgreSQL 9.6

We recommend that you set `rds.force_autovacuum_logging_level` to `WARNING`. We also recommend that you set `log_autovacuum_min_duration` to a value from 1000 to 5000. A setting of 5000 logs activity that takes longer than 5,000 milliseconds. Any setting other than -1 also logs messages if the autovacuum action is skipped because of a conflicting lock or concurrently dropped relations. For more information, see Automatic Vacuuming in the PostgreSQL documentation.

To troubleshoot issues, you can change the `rds.force_autovacuum_logging_level` parameter to one of the debug levels, from `debug1` up to `debug5` for the most verbose information. We recommend that you use debug settings for short periods of time and for troubleshooting purposes only. To learn more, see When to log in the PostgreSQL documentation.

> **Note**
>
> PostgreSQL allows the `rds_superuser` account to view autovacuum sessions in `pg_stat_activity`. For example, you can identify and end an autovacuum session that is blocking a command from running, or running slower than a manually issued vacuum command.

Understanding the behavior of autovacuum with invalid databases

A new value `-2` is introduced into the `datconnlimit` column in the `pg_database` catalog to indicate databases that have been interrupted in the middle of the DROP DATABASE operation as invalid.

This new value is available from the following Aurora PostgreSQL versions:

- 15.4 and all higher versions
- 14.9 and higher versions
- 13.12 and higher versions
- 12.16 and higher versions
- 11.21 and higher versions

Invalid databases do not affect autovacuum's ability to freeze functionality for valid databases. Autovacuum ignores invalid databases. Consequently, regular vacuum operations will continue to function properly and efficiently for all valid databases in your PostgreSQL environment.

Topics

- Monitoring transaction ID
- Adjusting the monitoring query
- Resolving invalid database issue

Monitoring transaction ID

The `age(datfrozenxid)` function is commonly used to monitor the transaction ID (XID) age of databases to prevent transaction ID wraparound.

Since invalid databases are excluded from autovacuum, their transaction ID (XID) counter can reach the maximum value of `2 billion`, wrap around to `- 2 billion`, and continue this cycle indefinitely. A typical query to monitor Transaction ID wraparound might look like:

```
SELECT max(age(datfrozenxid)) FROM pg_database;
```

However, with the introduction of the -2 value for `datconnlimit`, invalid databases can skew the results of this query. Since these databases are not valid and should not be part of regular maintenance checks, they can cause false positives, leading you to believe that the `age(datfrozenxid)` is higher than it actually is.

Adjusting the monitoring query

To ensure accurate monitoring, you should adjust your monitoring query to exclude invalid databases. Follow this recommended query:

```
SELECT
    max(age(datfrozenxid))
FROM
    pg_database
WHERE
    datconnlimit <> -2;
```

This query ensures that only valid databases are considered in the `age(datfrozenxid)` calculation, providing a true reflection of the transaction ID age across your PostgreSQL environment.

Resolving invalid database issue

When attempting to connect to an invalid database, you may encounter an error message similar to the following:

```
postgres=> \c db1
connection to server at "mydb.xxxxxxxxxx.us-west-2.rds.amazonaws.com" (xx.xx.xx.xxx),
 port xxxx failed: FATAL:  cannot connect to invalid database "db1"
HINT:  Use DROP DATABASE to drop invalid databases.
Previous connection kept
```

Additionally, if the `log_min_messages` parameter is set to `DEBUG2` or higher, you may notice the following log entries indicating that the autovacuum process is skipping the invalid database:

```
2024-07-30 05:59:00 UTC::@:[32000]:DEBUG:  autovacuum: skipping invalid database "db6"
2024-07-30 05:59:00 UTC::@:[32000]:DEBUG:  autovacuum: skipping invalid database "db1"
```

To resolve the issue, follow the `HINT` provided during the connection attempt. Connect to any valid database using your RDS master account or a database account with the `rds_superuser` role, and drop invalid database(s).

```
SELECT
    'DROP DATABASE ' || quote_ident(datname) || ';'
FROM
    pg_database
WHERE
    datconnlimit = -2 \gexec
```

Identify and resolve aggressive vacuum blockers in Aurora PostgreSQL

In PostgreSQL, vacuuming is vital for ensuring database health as it reclaims storage and prevents transaction ID wraparound issues. However, there are times when vacuuming can be prevented from operating as desired, which can result in performance degradation, storage bloat, and even impact availability of your DB instance by transaction ID wraparound. Therefore, identifying and resolving these issues are essential for optimal database performance and availability. Read Understanding autovacuum in Amazon RDS for PostgreSQL environments to learn more about autovacuum.

The `postgres_get_av_diag()` function helps identify issues that either prevent or delay the aggressive vacuum progress. Suggestions are provided, which may include commands to resolve the issue where it is identifiable or guidance for further diagnostics where the issue is not identifiable. Aggressive vacuum blockers are reported when the age exceeds RDS' adaptive autovacuum threshold of 500 million transaction IDs.

What is the age of the transaction ID?

The `age()` function for transaction IDs calculates the number of transactions that have occurred since the oldest unfrozen transaction ID for a database (`pg_database.datfrozenxid`) or table (`pg_class.relfrozenxid`). This value indicates database activity since the last aggressive vacuum operation and highlights the likely workload for upcoming VACUUM processes.

What is an aggressive vacuum?

An aggressive VACUUM operation conducts a comprehensive scan of all pages within a table, including those typically skipped during regular VACUUMs. This thorough scan aims to "freeze" transaction IDs approaching their maximum age, effectively preventing a situation known as transaction ID wraparound.

For `postgres_get_av_diag()` to report blockers, the blocker must be at least 500 million transactions old.

Topics

- Installing autovacuum monitoring and diagnostic tools in Aurora PostgreSQL
- Functions of postgres_get_av_diag() in Aurora PostgreSQL
- Resolving identifiable vacuum blockers in Aurora PostgreSQL
- Resolving unidentifiable vacuum blockers in Aurora PostgreSQL

- Resolving vacuum performance issues in Aurora PostgreSQL
- Explanation of the NOTICE messages in Aurora PostgreSQL

Installing autovacuum monitoring and diagnostic tools in Aurora PostgreSQL

The `postgres_get_av_diag()` function is currently available in the following Aurora PostgreSQL versions:

- 17.4 and higher 17 versions
- 16.7 and higher 16 versions
- 15.11 and higher 15 versions
- 14.16 and higher 14 versions
- 13.19 and higher 13 versions

In order to use `postgres_get_av_diag()`, create the `rds_tools` extension.

```
postgres=> CREATE EXTENSION rds_tools ;
CREATE EXTENSION
```

Verify that the extension is installed.

```
postgres=> \dx rds_tools
             List of installed extensions
   Name    | Version |  Schema   |                    Description
 ----------+---------+-----------
+-------------------------------------------------------------
 rds_tools |   1.9   | rds_tools | miscellaneous administrative functions for RDS
 PostgreSQL
 1 row
```

Verify that the function is created.

```
postgres=> SELECT
    proname function_name,
    pronamespace::regnamespace function_schema,
    proowner::regrole function_owner
FROM
    pg_proc
```

```
WHERE
    proname = 'postgres_get_av_diag';
    function_name     | function_schema | function_owner
----------------------+-----------------+----------------
 postgres_get_av_diag | rds_tools       | rds_superuser
(1 row)
```

Functions of postgres_get_av_diag() in Aurora PostgreSQL

The `postgres_get_av_diag()` function retrieves diagnostic information about autovacuum processes that are blocking or lagging behind in a Aurora PostgreSQL database. The query needs to be executed in the database with the oldest transaction ID for accurate results. For more information about using the database with the oldest transaction ID, see Not connected to the database with the age of oldest transaction ID

```
SELECT
    blocker,
    DATABASE,
    blocker_identifier,
    wait_event,
    TO_CHAR(autovacuum_lagging_by, 'FM9,999,999,999') AS autovacuum_lagging_by,
    suggestion,
    suggested_action
FROM (
    SELECT
        *
    FROM
        rds_tools.postgres_get_av_diag ()
    ORDER BY
        autovacuum_lagging_by DESC) q;
```

The `postgres_get_av_diag()` function returns a table with the following information:

blocker

Specifies the category of database activity that is blocking the vacuum.

- Active statement
- Idle in transaction
- Prepared transaction
- Logical replication slot

- Reader instances
- Temporary tables

database

Specifies the name of the database where applicable and supported. This is the database in which the activity is ongoing and blocking or will block the autovacuum. This is the database you are required to connect to and take action.

blocker_identifier

Specifies the identifier of the activity that is blocking or will block the autovacuum. The identifier can be a process ID along with a SQL statement, a prepared transaction, an IP address of a read replica, and the name of the replication slot, either logical or physical.

wait_event

Specifies the wait event of the blocking session and is applicable for the following blockers:

- Active statement
- Idle in transaction

autovacum_lagging_by

Specifies the number of transactions that autovacuum is lagging behind in its backlog work per category.

suggestion

Specifies suggestions to resolve the blocker. These instructions include the name of the database in which the activity exists where applicable, the Process ID (PID) of the session where applicable, and the action to be taken.

suggested_action

Suggests the action that needs to be taken to resolve the blocker.

Resolving identifiable vacuum blockers in Aurora PostgreSQL

Autovacuum performs aggressive vacuums and lowers the age of transaction IDs to below the threshold specified by the `autovacuum_freeze_max_age` parameter of your RDS instance. You can track this age using the Amazon CloudWatch metric `MaximumUsedTransactionIDs`.

To find the setting of `autovacuum_freeze_max_age` (which has a default of 200 million transaction IDs) for your Amazon RDS instance, you can use the following query:

```
SELECT
    TO_CHAR(setting::bigint, 'FM9,999,999,999') autovacuum_freeze_max_age
FROM
    pg_settings
WHERE
    name = 'autovacuum_freeze_max_age';
```

Note that `postgres_get_av_diag()` only checks for aggressive vacuum blockers when the age exceeds Amazon RDS' adaptive autovacuum threshold of 500 million transaction IDs. For `postgres_get_av_diag()` to detect blockers, the blocker must be at least 500 million transactions old.

The `postgres_get_av_diag()` function identifies the following types of blockers:

Topics

- Active statement
- Idle in transaction
- Prepared transaction
- Logical replication slot
- Reader instances
- Temporary tables

Active statement

In PostgreSQL, an active statement is an SQL statement that is currently being executed by the database. This includes queries, transactions, or any operations in progress. When monitoring via `pg_stat_activity`, the state column indicates that the process with the corresponding PID is active.

The `postgres_get_av_diag()` function displays output similar to the following when it identifies a statement that is an active statement.

```
blocker               | Active statement
database              | my_database
blocker_identifier    | SELECT pg_sleep(20000);
wait_event            | Timeout:PgSleep
autovacuum_lagging_by | 568,600,871
```

```
suggestion            | Connect to database "my_database", review carefully and you
 may consider terminating the process using suggested_action. For more information, see
 Working with PostgreSQL autovacuum in the Amazon RDS User Guide.
suggested_action      | {"SELECT pg_terminate_backend (29621);"}
```

Suggested action

Following the guidance in the `suggestion` column, the user can connect to the database where the active statement is present and, as specified in the `suggested_action` column, it's advisable to carefully review the option to terminate the session. If termination is safe, you may use the `pg_terminate_backend()` function to terminate the session. This action can be performed by an administrator (such as the RDS master account) or a user with the required `pg_terminate_backend()` privilege.

> **Warning**
>
> A terminated session will undo (`ROLLBACK`) changes it made. Depending on your requirements, you may want to rerun the statement. However, it is recommended to do so only after the autovacuum process has finished its aggressive vacuum operation.

Idle in transaction

An idle in transaction statement refers to any session that has opened an explicit transaction (such as by issuing a `BEGIN` statement), performed some work, and is now waiting for the client to either pass more work or signal the end of the transaction by issuing a `COMMIT`, `ROLLBACK`, or `END` (which would result in an implicit `COMMIT`).

The `postgres_get_av_diag()` function displays output similar to the following when it identifies an `idle in transaction` statement as a blocker.

```
blocker               | idle in transaction
database              | my_database
blocker_identifier    | INSERT INTO tt SELECT * FROM tt;
wait_event            | Client:ClientRead
autovacuum_lagging_by | 1,237,201,759
suggestion            | Connect to database "my_database", review carefully and you
 may consider terminating the process using suggested_action. For more information, see
 Working with PostgreSQL autovacuum in the Amazon RDS User Guide.
suggested_action      | {"SELECT pg_terminate_backend (28438);"}
```

Suggested action

As indicated in the `suggestion` column, you can connect to the database where the idle in transaction session is present and terminate the session using the `pg_terminate_backend()` function. The user can be your admin (RDS master account) user or a user with the `pg_terminate_backend()` privilege.

> **Warning**
>
> A terminated session will undo (`ROLLBACK`) changes it made. Depending on your requirements, you may want to rerun the statement. However, it is recommended to do so only after the autovacuum process has finished its aggressive vacuum operation.

Prepared transaction

PostgreSQL allows transactions that are part of a two-phase commit strategy called prepared transactions. These are enabled by setting the `max_prepared_transactions` parameter to a non-zero value. Prepared transactions are designed to ensure that a transaction is durable and remains available even after database crashes, restarts, or client disconnections. Like regular transactions, they are assigned a transaction ID and can affect the autovacuum. If left in a prepared state, autovacuum cannot perform freeezing and it can lead to transaction ID wraparound.

When transactions are left prepared indefinitely without being resolved by a transaction manager, they become orphaned prepared transactions. The only way to fix this is to either commit or rollback the transaction using the `COMMIT PREPARED` or `ROLLBACK PREPARED` commands, respectively.

> **Note**
>
> Be aware that a backup taken during a prepared transaction will still contain that transaction after restoration. Refer to the following information about how to locate and close such transactions.

The `postgres_get_av_diag()` function displays the following output when it identifies a blocker that is a prepared transaction.

```
blocker              | Prepared transaction
```

```
database              | my_database
blocker_identifier    | myptx
wait_event            | Not applicable
autovacuum_lagging_by | 1,805,802,632
suggestion            | Connect to database "my_database" and consider either COMMIT
 or ROLLBACK the prepared transaction using suggested_action. For more information, see
 Working with PostgreSQL autovacuum in the Amazon RDS User Guide.
suggested_action      | {"COMMIT PREPARED 'myptx';",[OR],"ROLLBACK PREPARED 'myptx';"}
```

Suggested action

As mentioned in the suggestion column, connect to the database where the prepared transaction is located. Based on the `suggested_action` column, carefully review whether to perform either `COMMIT` or `ROLLBACK`, and the the appropiate the action.

To monitor prepared transactions in general, PostgreSQL offers a catalog view called `pg_prepared_xacts`. You can use the following query to find prepared transactions.

```
SELECT
    gid,
    prepared,
    owner,
    database,
    transaction AS oldest_xmin
FROM
    pg_prepared_xacts
ORDER BY
    age(transaction) DESC;
```

Logical replication slot

The purpose of a replication slot is to hold unconsumed changes until they are replicated to a target server. For more information, see PostgreSQL's Logical replication.

There are two types of logical replication slots.

Inactive logical replication slots

When replication is terminated, unconsumed transaction logs can't be removed, and the replication slot becomes inactive. Although an inactive logical replication slot isn't currently used by a subscriber, it remains on the server, leading to the retention of WAL files and preventing the removal of old transaction logs. This can increase disk usage and specifically block autovacuum

from cleaning up internal catalog tables, as the system must preserve LSN information from being overwritten. If not addressed, this can result in catalog bloat, performance degradation, and an increased risk of wraparound vacuum, potentially causing transaction downtime.

Active but slow logical replication slots

Sometimes removal of dead tuples of catalog is delayed due to the performance degradation of logical replication. This delay in replication slows down updating the `catalog_xmin` and can lead to catalog bloat and wraparound vacuum.

The `postgres_get_av_diag()` function displays output similar to the following when it finds a logical replication slot as a blocker.

```
blocker               | Logical replication slot
database              | my_database
blocker_identifier    | slot1
wait_event            | Not applicable
autovacuum_lagging_by | 1,940,103,068
suggestion            | Ensure replication is active and resolve any lag for the slot
 if active. If inactive, consider dropping it using the command in suggested_action.
 For more information, see Working with PostgreSQL autovacuum in the Amazon RDS User
 Guide.
suggested_action      | {"SELECT pg_drop_replication_slot('slot1') FROM
 pg_replication_slots WHERE active = 'f';"}
```

Suggested action

To resolve this problem, check the replication configuration for issues with the target schema or data that might be terminating the apply process. The most common reasons are the following:

- Missing columns
- Incompatible data type
- Data mismatch
- Missing table

If the problem is related to infrastructure issues:

- Network issues - How do I resolve issues with an Amazon RDS DB in an incompatible network state?.
- Database or DB instance is not available due to the following reasons:

- Replica instance is out of storage - Review Amazon RDS DB instances run out of storage for information about adding storage.
- Incompatible-parameters - Review How can I fix an Amazon RDS DB instance that is stuck in the incompatible-parameters status? for more information about how you can resolve the issue.

If your instance is outside the Amazon network or on Amazon EC2, consult your administrator on how to resolve the availability or infrastructure-related issues.

Dropping the inactive slot

> **Warning**
>
> Caution: Before dropping a replication slot, carefully ensure that it has no ongoing replication, is inactive, and is in an unrecoverable state. Dropping a slot prematurely could disrupt replication or cause data loss.

After confirming that the replication slot is no longer needed, drop it to allow autovacuum to continue. The condition `active = 'f'` ensures that only an inactive slot is dropped.

```
SELECT pg_drop_replication_slot('slot1') WHERE active ='f'
```

Reader instances

When the hot_standby_feedback setting is enabled, it prevents autovacuum on the writer instance from removing dead rows that might still be needed by queries running on the reader instance. This behavior is necessary because queries running on the reader instance (also applicable to reader instances in Aurora Global Database) require those rows to remain available on the writer instance preventing query conflicts and cancellations.

> **Note**
>
> `hot_standby_feedback` is enabled by default and unmodifiable in Aurora PostgreSQL.

The `postgres_get_av_diag()` function displays output similar to the following when it finds a read replica with physical replication slot as the blocker.

```
blocker               | Oldest query running on aurora reader
database              | Not applicable
blocker_identifier    | my-aurora-reader-2
wait_event            | Not applicable
autovacuum_lagging_by | 540,122,859
suggestion            | Run the following query on the reader "my-aurora-reader-2" to
 find the long running query:

                      | SELECT * FROM pg_catalog.pg_stat_activity WHERE
 backend_xmin::text::bigint = 523476310;

                      | Review carefully and you may consider terminating the query on
 reader using suggested_action.
suggested_action      | {"SELECT pg_terminate_backend(pid) FROM
 pg_catalog.pg_stat_activity WHERE backend_xmin::text::bigint = 523476310;","

                      | [OR]


                      | ","Delete the reader if not needed"}
```

As recommended in the `suggested_action` column, carefully review these options to unblock autovacuum.

- **Terminate the query** – Following the guidance in the suggestion column, you can connect to the read replica, as specified in the suggested_action column, it's advisable to carefully review the option to terminate the session. If termination is deemed safe, you may use the `pg_terminate_backend()` function to terminate the session. This action can be performed by an administrator (such as the RDS master account) or a user with the required pg_terminate_backend() privilege.

  You may run the following SQL command on the read replica to terminate the query that is preventing the vacuum on the primary from cleaning up old rows. The value of `backend_xmin` is reported in the function's output:

  ```
  SELECT
      pg_terminate_backend(pid)
  FROM
      pg_catalog.pg_stat_activity
  WHERE
      backend_xmin::text::bigint = backend_xmin;
  ```

- **Delete the reader instances if not needed** – If the reader instance is no longer necessary, you can delete it. This will remove the associated replication overhead and allow the primary to recycle transaction logs without being held back by the instance.

Temporary tables

Temporary tables, created using the `TEMPORARY` keyword, reside in the temp schema, for example pg_temp_xxx, and are only accessible to the session that created them. Temporary tables are dropped when the session ends. However, these tables are invisible to PostgreSQL's autovacuum process, and must be manually vacuumed by the session that created them. Trying to vacuum the temp table from another session has no effect.

In unusual circumstances, a temporary table exists without an active session owning it. If the owning session ends unexpectedly due to a fatal crash, network issue, or similar event, the temporary table might not be cleaned up, leaving it behind as an "orphaned" table. When the PostgreSQL autovacuum process detects an orphaned temporary table, it logs the following message:

```
LOG: autovacuum: found orphan temp table \"%s\".\"%s\" in database \"%s\"
```

The `postgres_get_av_diag()` function displays output similar to the following when it identifies a temporary table as a blocker. For the function to correctly show the output related to temporary tables, it needs to be executed within the same database where those tables exist.

```
blocker               | Temporary table
database              | my_database
blocker_identifier    | pg_temp_14.ttemp
wait_event            | Not applicable
autovacuum_lagging_by | 1,805,802,632
suggestion            | Connect to database "my_database". Review carefully, you
 may consider dropping temporary table using command in suggested_action. For more
 information, see Working with PostgreSQL autovacuum in the Amazon RDS User Guide.
suggested_action      | {"DROP TABLE ttemp;"}
```

Suggested action

Follow the instructions provided in the `suggestion` column of the output to identify and remove the temporary table that is preventing autovacuum from running. Use the following command to

drop the temporary table reported by `postgres_get_av_diag()`. Replace the table name based on the output provided by the `postgres_get_av_diag()` function.

```
DROP TABLE my_temp_schema.my_temp_table;
```

The following query can be used to identify temporary tables:

```
SELECT
    oid,
    relname,
    relnamespace::regnamespace,
    age(relfrozenxid)
FROM
    pg_class
WHERE
relpersistence = 't'
ORDER BY
    age(relfrozenxid) DESC;
```

Resolving unidentifiable vacuum blockers in Aurora PostgreSQL

This section explores additional reasons that can prevent vacuuming from making progress. These issues are currently not directly identifiable by the `postgres_get_av_diag()` function.

Topics

- Index inconsistency
- Exceptionally high transaction rate

Index inconsistency

A logically inconsistent index can prevent autovacuum from making progress. The following errors or similar errors are logged during either the vacuum phase of the index or when the index is accessed by SQL statements.

```
ERROR: right sibling's left-link doesn't match:block 5 links to 10 instead of expected
 2 in index ix_name
```

```
ERROR: failed to re-find parent key in index "XXXXXXXXXX" for deletion target page XXX
CONTEXT:  while vacuuming index index_name of relation schema.table
```

Guidance

Rebuild the index or skip indexes using `INDEX_CLEANUP` on manual `VACUUM FREEZE`.

- **Using the CONCURRENTLY option** – Prior to PostgreSQL version 12, rebuilding an index required an exclusive table lock, restricting access to the table. With PostgreSQL version 12, and later versions, the CONCURRENTLY option allows for row-level locking, significantly improving the table's availability. Following is the command:

  ```
  REINDEX INDEX ix_name CONCURRENTLY;
  ```

  While CONCURRENTLY is less disruptive, it can be slower on busy tables. Consider building the index during low-traffic periods if possible. For more information, see REINDEX in *PostgreSQL* documentation.
- **Using the INDEX_CLEANUP FALSE option** – If the indexes are large and estimated to require a significant amount of time to finish, you can unblock autovacuum by executing a manual VACUUM FREEZE while excluding indexes. This functionality is available in PostgreSQL version 12 and later versions.

  Bypassing indexes will allow you to skip the vacuum process of the inconsistent index and mitigate the wraparound issue. However, this will not resolve the underlying invalid page problem. To fully address and resolve the invalid page issue, you will still need to rebuild the index.

Exceptionally high transaction rate

In PostgreSQL, high transaction rates can significantly impact autovacuum's performance, leading to slower cleanup of dead tuples and increased risk of transaction ID wraparound. You can monitor the transaction rate by measuring the difference in `max(age(datfrozenxid))` between two time periods, typically per second. Additionally, you can use the following database counter metrics, which are exposed through the Performance Insights API, to measure the transaction rate (the sum of xact_commit and xact_rollback) which is the total number of transactions.

Counter	Type	Unit	Metric
xact_commit	Transactions	Commits per second	db.Transactions.xact_commit

Counter	Type	Unit	Metric
xact_rollback	Transactions	Rollbacks per second	db.Transactions.xact_rollback

A rapid increase indicates a high transaction load, which can overwhelm autovacuum, causing bloat, lock contention, and potential performance issues. This can negatively impact the autovacuum process in a couple of ways:

- **Table Activity:** The specific table being vacuumed could be experiencing a high volume of transactions, causing delays.
- **System Resources** The overall system might be overloaded, making it difficult for autovacuum to access the necessary resources to function efficiently.

Consider the following strategies for allowing autovacuum to operate more effectively and keep up with its tasks:

1. Reduce the transaction rate if possible. Consider to batch or group similar transactions where feasible.
2. Target frequently updated tables with manual `VACUUM FREEZE` operation nightly, weekly, or biweekly during off-peak hours.
3. Consider scaling up your instance class to allocate more system resources to handle the high transaction volume and autovacuum.

Resolving vacuum performance issues in Aurora PostgreSQL

This section discusses factors that often contribute to slower vacuum performance and how to address these issues.

Topics

- Vacuum large indexes
- Too many tables or databases to vacuum
- Aggressive vacuum (to prevent wraparound) is running

Vacuum large indexes

VACUUM operates through sequential phases: initialization, heap scanning, index and heap vacuuming, index cleanup, heap truncation, and final cleanup. During the heap scan, the process prunes pages, defragments and freezes them. After completing the heap scan, VACUUM cleans indexes, returns empty pages to the operating system, and performs final cleanup tasks like vacuuming the free space map and updating statistics.

Index vacuuming may require multiple passes when `maintenance_work_mem` (or `autovacuum_work_mem`) is insufficient to process the index. In PostgreSQL 16 and earlier, a 1 GB memory limit for storing dead tuple IDs often forced multiple passes on large indexes. PostgreSQL 17 introduces `TidStore`, which dynamically allocates memory instead of using a single-allocation array. This removes the 1 GB constraint, uses memory more efficiently, and reduces the need for multiple index scans per each index.

Large indexes may still require multiple passes in PostgreSQL 17 if available memory can't accommodate the entire index processing at once. Typically, larger indexes contain more dead tuples that require multiple passes.

Detecting slow vacuum operations

The `postgres_get_av_diag()` function can detect when vacuum operations are running slowly due to insufficient memory. For more information on this function, see Installing autovacuum monitoring and diagnostic tools in Aurora PostgreSQL.

The `postgres_get_av_diag()` function issues the following notices when the available memory is not enough to complete the index vacuuming in a single pass.

`rds_tools` 1.9

```
NOTICE: Your database is currently running aggressive vacuum to prevent wraparound and
 it might be slow.
```

```
NOTICE: The current setting of autovacuum_work_mem is XX might not be sufficient.
 Consider increasing the setting to XXX, and if necessary, scaling up the RDS instance
 class for more
        memory. The suggested value is an estimate based on the current number of dead
 tuples for the table being vacuumed, which might not fully reflect the latest state.
 Additionally, review the possibility of manual
        vacuum with exclusion of indexes using (VACUUM (INDEX_CLEANUP FALSE, VERBOSE
 TRUE) table_name;). For more information, see
```

```
        Working with PostgreSQL autovacuum in the Amazon Aurora User Guide.
```

> **Note**
>
> The `postgres_get_av_diag()` function relies on `pg_stat_all_tables.n_dead_tup` for estimating the amount of memory required for index vacuuming.

When the `postgres_get_av_diag()` function identifies a slow vacuum operation that requires multiple index scans due to insufficient `autovacuum_work_mem`, it will generate the following message:

```
NOTICE: Your vacuum is performing multiple index scans due to insufficient
 autovacuum_work_mem:XXX for index vacuuming.
        For more information, see Working with PostgreSQL autovacuum in the Amazon
 Amazon RDS User Guide.
```

Guidance

You can apply the following workarounds using manual `VACUUM FREEZE` to speed up freezing the table.

Increase the memory for vacuuming

As suggested by the `postgres_get_av_diag()` function, it's advisable to increase the `autovacuum_work_mem` parameter to address potential memory constraints at the instance level. While `autovacuum_work_mem` is a dynamic parameter, it's important to note that for the new memory setting to take effect, the autovacuum daemon needs to restart its workers. To accomplish this:

1. Confirm that the new setting is in place.
2. Terminate the processes currently running autovacuum.

This approach ensures that the adjusted memory allocation is applied to new autovacuum operations.

For more immediate results, consider manually performing a `VACUUM FREEZE` operation with an increased `maintenance_work_mem` setting within your session:

```
SET maintenance_work_mem TO '1GB';
VACUUM FREEZE VERBOSE table_name;
```

If you're using Amazon RDS and find that you need additional memory to support higher values for `maintenance_work_mem` or `autovacuum_work_mem`, consider upgrading to an instance class with more memory. This can provide the necessary resources to enhance both manual and automatic vacuum operations, leading to improved overall vacuum and database performance.

Disable INDEX_CLEANUP

Manual `VACUUM` in PostgreSQL version 12 and later allows skipping the index cleanup phase, while emergency autovacuum in PostgreSQL version 14 and later does this automatically based on the `vacuum_failsafe_age` parameter.

> **Warning**
>
> Skipping index cleanup can lead to index bloat and negatively impact query performance. To mitigate this, consider reindexing or vacuuming affected indexes during a maintenance window.

For additional guidance on handling large indexes, refer to the documentation on Managing autovacuum with large indexes.

Parallel index vacuuming

Starting with PostgreSQL 13, indexes can be vacuumed and cleaned in parallel by default using manual `VACUUM`, with one vacuum worker process assigned to each index. However, for PostgreSQL to determine if a vacuum operation qualifies for parallel execution, specific criteria must be met:

- There must be at least two indexes.
- The `max_parallel_maintenance_workers` parameter should be set to at least 2.
- The index size must exceed the `min_parallel_index_scan_size` limit, which defaults to 512KB.

You can adjust the `max_parallel_maintenance_workers` setting based on the number of vCPUs available on your Amazon RDS instance and the number of indexes on the table to optimize vacuuming turnaround time.

For more information, see Parallel vacuuming in Amazon RDS for PostgreSQL and Amazon Aurora PostgreSQL.

Too many tables or databases to vacuum

As mentioned in PostgreSQL's The Autovacuum Daemon documentation, the autovacuum daemon operates through multiple processes. This includes a persistent autovacuum launcher responsible for starting autovacuum worker processes for each database within the system. The launcher schedules these workers to initiate approximately every `autovacuum_naptime` seconds per database.

With 'N' databases, a new worker begins roughly every [`autovacuum_naptime`/N seconds]. However, the total number of concurrent workers is limited by the `autovacuum_max_workers` setting. If the number of databases or tables requiring vacuuming exceeds this limit, the next database or table will be processed as soon as a worker becomes available.

When many large tables or databases require vacuuming concurrently, all available autovacuum workers can become occupied for an extended duration, delaying maintenance on other tables and databases. In environments with high transaction rates, this bottleneck can quickly escalate and potentially lead to wraparound vacuum issues within your Amazon RDS instance.

When `postgres_get_av_diag()` detects a high number of tables or databases, it provides the following recommendation:

```
NOTICE: Your database is currently running aggressive vacuum to prevent wraparound and
 it might be slow.
```

```
NOTICE: The current setting of autovacuum_max_workers:3 might not be sufficient.
 Consider increasing the setting and, if necessary, consider scaling up the Amazon RDS
 instance class for more workers.
```

Guidance

Increase autovacuum_max_workers

To expedite the vacuuming, we recommend adjusting the `autovacuum_max_workers` parameter to allow more concurrent autovacuum workers. If performance bottlenecks persist, consider scaling up your Amazon RDS instance to a class with more vCPUs, which can further improve the parallel processing capabilities.

Aggressive vacuum (to prevent wraparound) is running

The age of the database (MaximumUsedTransactionIDs) in PostgreSQL only decreases when an aggressive vacuum (to prevent wraparound) is successfully completed. Until this vacuum finishes, the age will continue to increase depending on the transaction rate.

The `postgres_get_av_diag()` function generates the following `NOTICE` when it detects an aggressive vacuum. However, it only triggers this output after the vacuum has been active for at least two minutes.

```
NOTICE: Your database is currently running aggressive vacuum to prevent wraparound,
 monitor autovacuum performance.
```

For more information about aggressive vacuum, see [When an aggressive vacuum is already running].

You can verify if an aggressive vacuum is in progress with the following query:

```
SELECT
    a.xact_start AS start_time,
    v.datname "database",
    a.query,
    a.wait_event,
    v.pid,
    v.phase,
    v.relid::regclass,
    pg_size_pretty(pg_relation_size(v.relid)) AS heap_size,
    (
        SELECT
            string_agg(pg_size_pretty(pg_relation_size(i.indexrelid)) || ':' ||
 i.indexrelid::regclass || chr(10), ', ')
        FROM
            pg_index i
        WHERE
            i.indrelid = v.relid
    ) AS index_sizes,
    trunc(v.heap_blks_scanned * 100 / NULLIF(v.heap_blks_total, 0)) AS step1_scan_pct,
    v.index_vacuum_count || '/' || (
        SELECT
            count(*)
        FROM
            pg_index i
```

```
        WHERE
            i.indrelid = v.relid
    ) AS step2_vacuum_indexes,
    trunc(v.heap_blks_vacuumed * 100 / NULLIF(v.heap_blks_total, 0)) AS
 step3_vacuum_pct,
    age(CURRENT_TIMESTAMP, a.xact_start) AS total_time_spent_sofar
FROM
    pg_stat_activity a
    INNER JOIN pg_stat_progress_vacuum v ON v.pid = a.pid;
```

You can determine if it's an aggressive vacuum (to prevent wraparound) by checking the query column in the output. The phrase "to prevent wraparound" indicates that it is an aggressive vacuum.

```
query                 | autovacuum: VACUUM public.t3 (to prevent wraparound)
```

For example, suppose you have a blocker at transaction age 1 billion and a table requiring an aggressive vacuum to prevent wraparound at the same transaction age. Additionally, there's another blocker at transaction age 750 million. After clearing the blocker at transaction age 1 billion, the transaction age won't immediately drop to 750 million. It will remain high until the table needing the aggressive vacuum or any transaction with an age over 750 million is completed. During this period, the transaction age of your PostgreSQL cluster will continue to rise. Once the vacuum process is completed, the transaction age will drop to 750 million but will start increasing again until further vacuuming is finished. This cycle will continue as long as these conditions persist, until the transaction age eventually drops to the level configured for your Amazon RDS instance, specified by `autovacuum_freeze_max_age`.

Explanation of the NOTICE messages in Aurora PostgreSQL

The `postgres_get_av_diag()` function provides the following NOTICE messages:

When the age has not reached the monitoring threshold yet

The monitoring threshold for `postgres_get_av_diag()` to identify blockers is 500 million transactions by default. If `postgres_get_av_diag()` generates the following NOTICE, it indicates that the transaction age has not yet reached this threshold.

```
NOTICE: postgres_get_av_diag() checks for blockers that prevent aggressive vacuums
 only, it does so only after exceeding dvb_threshold which is 500,000,000 and age of
 this PostgreSQL cluster is currently at 2.
```

Not connected to the database with the age of oldest transaction ID

The `postgres_get_av_diag()` function provides the most accurate output when connected to the database with the oldest transaction ID age. The database with the oldest transaction ID age reported by `postgres_get_av_diag()` will be different than “my_database” in your case. If you are not connected to the correct database, the following NOTICE is generated:

```
NOTICE: You are not connected to the database with the age of oldest transaction
 ID. Connect to my_database database and run postgres_get_av_diag() for accurate
 reporting.
```

Connecting to the database with the oldest transaction age is important for the following reasons:

- **Identifying temporary table blockers:** Because the metadata for temporary tables is specific to each database, they are typically found in the database where they are created. However, if a temporary table happens to be the top blocker and resides in the database with the oldest transaction, this could be misleading. Connecting to the correct database ensures the accurate identification of the temporary table blocker.
- **Diagnosing slow vacuums:** The index metadata and table count information are database-specific and necessary for diagnosing slow vacuum issues.

Database with oldest transaction by age is on an rdsadmin or template0 database

In certain cases, the `rdsadmin` or `template0` databases may be identified as the database with the oldest transaction ID age. If this happens, `postgres_get_av_diag()` will issue the following NOTICE:

```
NOTICE: The database with the age of oldest transaction ID is rdsadmin or template0,
 reach out to support if the reported blocker is in rdsadmin or template0.
```

Verify that the listed blocker is not originating from either of these two databases. If the blocker is reported to be present in either `rdsadmin` or `template0`, contact support as these databases are not user-accessible and require intervention.

It is highly unlikely for either the `rdsadmin` or `template0` database to contain a top blocker.

When an aggressive vacuum is already running

The `postgres_get_av_diag()` function is designed to report when an aggressive vacuum process is running, but it only triggers this output after the vacuum has been active for at least

1 minute. This intentional delay helps reduce the chances of false positives. By waiting, the function ensures that only effective, significant vacuums are reported, leading to more accurate and reliable monitoring of vacuum activity.

The `postgres_get_av_diag()` function generates the following NOTICE when it detects one or more aggressive vacuums in progress.

```
NOTICE: Your database is currently running aggressive vacuum to prevent wraparound,
 monitor autovacuum performance.
```

As indicated in the NOTICE, continue to monitor the performance of vacuum. For more information about aggressive vacuum see Aggressive vacuum (to prevent wraparound) is running

When autovacuum is off

The `postgres_get_av_diag()` function generates the following NOTICE if autovacuum is disabled on your database instance:

```
NOTICE: Autovacuum is OFF, we strongly recommend to enable it, no restart is
 necessary.
```

Autovacuum is a critical feature of your Aurora PostgreSQL DB instance that ensures smooth database operation. It automatically removes old row versions, reclaims storage space, and prevents table bloat, helping to keep tables and indexes efficient for optimal performance. Additionally, it protects against transaction ID wraparound, which can halt transactions on your Amazon RDS instance. Disabling autovacuum can lead to long-term declines in database performance and stability. We suggest you to keep it on all the times. For more information, see Understanding autovacuum in Aurora PostgreSQL environments.

> **Note**
>
> Turning off autovacuum doesn't stop aggressive vacuums. These will still occur once your tables hit the `autovacuum_freeze_max_age` threshold.

The number of transactions remaining is critically low

The `postgres_get_av_diag()` function generates the following NOTICE when a wraparound vacuum is imminent. This NOTICE is issued when your Amazon RDS instance is 100 million transactions away from potentially rejecting new transactions.

```
WARNING: Number of transactions remaining is critically low, resolve issues with
 autovacuum or perform manual VACUUM FREEZE before your instance stops accepting
 transactions.
```

Your immediate action is required to avoid database downtime. You should closely monitor your vacuuming operations and consider manually initiating a `VACUUM FREEZE` on the affected database to prevent transaction failures.

Adaptive autovacuum enhancements in PostgreSQL version 18

Starting with RDS for PostgreSQL version 18, Amazon RDS enhances the adaptive autovacuum mechanism to dynamically scale `autovacuum_max_workers` when your DB instance approaches transaction ID wraparound. In earlier PostgreSQL versions, `autovacuum_max_workers` required a restart to change. PostgreSQL 18 makes `autovacuum_max_workers` a dynamic parameter, allowing Amazon RDS to adjust it without a restart.

PostgreSQL 18 also introduces a new parameter, `autovacuum_worker_slots`, which reserves backend process slots for autovacuum workers at server startup. This parameter sets the upper limit on how many autovacuum workers can ever run concurrently – `autovacuum_max_workers` cannot exceed this value. Unlike `autovacuum_max_workers`, `autovacuum_worker_slots` requires a restart to change. For more information, see `autovacuum_worker_slots` in the PostgreSQL documentation.

How adaptive autovacuum scales workers

When the `MaximumUsedTransactionIDs` CloudWatch metric exceeds 1 billion on a PostgreSQL 18 instance, Amazon RDS increases `autovacuum_max_workers` up to the `autovacuum_worker_slots` value using the following formula, which is also the default formula for the `autovacuum_worker_slots` parameter:

```
LEAST(GREATEST({DBInstanceClassMemory/32185783296}, 16), 32)
```

For small and medium instances (up to 512 GiB of memory), adaptive autovacuum scales to 16 workers. For larger instances, the number of workers scales proportionally with memory up to the maximum of 32. For example, a db.m5.4xlarge instance (64 GiB) has a default `autovacuum_max_workers` of 3. When `MaximumUsedTransactionIDs` exceeds 1 billion, Amazon RDS scales it to 16 workers.

Amazon RDS never decreases a value that you have already configured. If your configured `autovacuum_max_workers` is already higher than the calculated value, Amazon RDS does not change it.

Each autovacuum worker uses memory up to the `autovacuum_work_mem` setting. When adaptive autovacuum increases the number of workers, the total memory consumed by autovacuum increases proportionally. For example, if `autovacuum_work_mem` is set to 1 GB and adaptive autovacuum scales from 3 to 16 workers, the maximum memory used by autovacuum workers increases from 3 GB to 16 GB.

> **Warning**
>
> Make sure that the combination of worker processes and memory equals the total memory that you want to allocate to autovacuum.

Monitoring adaptive autovacuum changes

When Amazon RDS modifies `autovacuum_max_workers` or any other autovacuum parameter, it generates an event for the affected DB instance. You can view these events in the Amazon Web Services Management Console or through the Amazon RDS API. For more information about RDS events, see Amazon RDS event categories and event messages. To receive notifications when these events occur, see Subscribing to Amazon RDS event notification.

To view the current in-memory autovacuum settings, connect to your DB instance and run the following command:

```
SHOW autovacuum_max_workers;
```

The parameter group values are not changed. Amazon RDS modifies these parameters only in memory on the DB instance. When `MaximumUsedTransactionIDs` drops below the threshold, Amazon RDS resets the parameters to the values in your parameter group and generates another event.

Managing TOAST OID contention in Amazon Aurora PostgreSQL

TOAST (The Oversized-Attribute Storage Technique) is a PostgreSQL feature designed to handle large data values that exceed the typical 8KB database block size. PostgreSQL doesn't allow physical rows to span multiple blocks. The block size acts as an upper limit on row size. TOAST overcomes this restriction by splitting large field values into smaller chunks. It stores them separately in a dedicated TOAST table linked to the main table. For more information, see the PostgreSQL TOAST storage mechanism and implementation documentation.

Topics

- Understanding TOAST operations
- Identifying performance challenges
- Recommendations
- Monitoring

Understanding TOAST operations

TOAST performs compression and stores large field values out of line. TOAST assigns a unique OID (Object Identifier) to each chunk of oversized data stored in the TOAST table. The main table stores the TOAST value ID and relation ID on the page to reference the corresponding row in the TOAST table. This allows PostgreSQL to efficiently locate and manage these TOAST chunks. However, as the TOAST table grows, the system risks exhausting available OIDs, leading to both performance degradation and potential downtime due to OID depletion.

Object identifiers in TOAST

An Object Identifier (OID) is a system-wide unique identifier used by PostgreSQL to reference database objects like tables, indexes, and functions. These identifiers play a vital role in PostgreSQL's internal operations, allowing the database to efficiently locate and manage objects.

For tables with eligible data sets for toasting, PostgreSQL assigns OIDs to uniquely identify each chunk of oversized data stored in the associated TOAST table. The system associates each chunk with a `chunk_id`, which helps PostgreSQL organize and locate these chunks efficiently within the TOAST table.

Identifying performance challenges

PostgreSQL's OID management relies on a global 32-bit counter so that it wraps around after generating 4 billion unique values. While the database cluster shares this counter, OID allocation involves two steps during TOAST operations:

- **Global counter for allocation** – The global counter assigns a new OID across the cluster.
- **Local search for conflicts** – The TOAST table ensures the new OID does not conflict with existing OIDs already used in that specific table.

Performance degradation can occur when:

- The TOAST table has high fragmentation or dense OID usage, leading to delays in assigning the OID.
- The system frequently allocates and reuses OIDs in environments with high data churn or wide tables that use TOAST extensively.

For more information, see the PostgreSQL TOAST table size limits and OID allocation documentation:

A global counter generates the OIDs and wraps around every 4 billion values, so that from time to time, the system generates an already-used value again. PostgreSQL detects that and tries again with the next OID. A slow INSERT could occur if there is a very long run of used OID values with no gaps in the TOAST table. These challenges become more pronounced as the OID space fills, leading to slower inserts and updates.

Identifying the problem

- Simple `INSERT` statements take significantly longer than usual in an inconsistent and random manner.
- Delays occur only for `INSERT` and `UPDATE` statements involving TOAST operations.
- The following log entries appear in PostgreSQL logs when the system struggles to find available OIDs in TOAST tables:

```
LOG: still searching for an unused OID in relation "pg_toast_20815"
DETAIL: OID candidates have been checked 1000000 times, but no unused OID has been
 found yet.
```

- Performance Insights indicates a high number of average active sessions (AAS) associated with `LWLock:buffer_io` and `LWLock:OidGenLock` wait events.

  You can run the following SQL query to identify long-running INSERT transactions with wait events:

```
SELECT
    datname AS database_name,
    usename AS database_user,
    pid,
    now() - pg_stat_activity.xact_start AS transaction_duration,
    concat(wait_event_type, ':', wait_event) AS wait_event,
    substr(query, 1, 30) AS TRANSACTION,
    state
FROM
    pg_stat_activity
WHERE (now() - pg_stat_activity.xact_start) > INTERVAL '60 seconds'
    AND state IN ('active', 'idle in transaction', 'idle in transaction (aborted)',
 'fastpath function call', 'disabled')
    AND pid <> pg_backend_pid()
AND lower(query) LIKE '%insert%'
ORDER BY
    transaction_duration DESC;
```

  Example query results displaying INSERT operations with extended wait times:

```
 database_name |  database_user  |  pid  | transaction_duration |     wait_event
 |          transaction           | state
---------------+-----------------+-------+----------------------
+---------------------+--------------------------------+--------
 postgres       | db_admin_user| 70965 | 00:10:19.484061      | LWLock:buffer_io    |
 INSERT INTO "products" (......... | active
 postgres       | db_admin_user| 69878 | 00:06:14.976037      | LWLock:buffer_io    |
 INSERT INTO "products" (......... | active
 postgres       | db_admin_user| 68937 | 00:05:13.942847      | :                   |
 INSERT INTO "products" (......... | active
```

Isolating the problem

- **Test small insert** – Insert a record smaller than the `toast_tuple_target` threshold. Remember that compression is applied before TOAST storage. If this operates without performance issues, the problem is related to TOAST operations.
- **Test new table** – Create a new table with the same structure and insert a record larger than `toast_tuple_target`. If this works without issues, the problem is localized to the original table's OID allocation.

Recommendations

The following approaches can help resolve TOAST OID contention issues.

- **Data cleanup and archive** – Review and delete any obsolete or unnecessary data to free up OIDs for future use, or archive the data. Consider the following limitations:
  - Limited scalability, as future cleanup might not always be possible.
  - Possible long-running VACUUM operation to remove the resulting dead tuples.
- **Write to a new table** – Create a new table for future inserts and use a `UNION ALL` view to combine old and new data for queries. This view presents the combined data from both old and new tables, allowing queries to access them as a single table. Consider the following limitations:
  - Updates on the old table might still cause OID exhaustion.
- **Partition or Shard** – Partition the table or shard data for better scalability and performance. Consider the following limitations:
  - Increased complexity in query logic and maintenance, potential need for application changes to handle partitioned data correctly.

Monitoring

Using system tables

You can use PostgreSQL's system tables to monitor growth of OID usage.

> **Warning**
>
> Depending on the number of OIDs in the TOAST table, it may take time to complete. We recommend that you schedule monitoring during off-business hours to minimize impact.

The following anonymous block counts the number of distinct OIDs used in each TOAST table and displays the parent table information:

```
DO $$
DECLARE
    r record;
    o bigint;
    parent_table text;
    parent_schema text;
BEGIN
    SET LOCAL client_min_messages TO notice;
    FOR r IN
    SELECT
        c.oid,
        c.oid::regclass AS toast_table
    FROM
        pg_class c
    WHERE
        c.relkind = 't'
        AND c.relowner != 10 LOOP
            -- Fetch the number of distinct used OIDs (chunk IDs) from the TOAST table
            EXECUTE 'SELECT COUNT(DISTINCT chunk_id) FROM ' || r.toast_table INTO o;
            -- If there are used OIDs, find the associated parent table and its schema
            IF o <> 0 THEN
                SELECT
                    n.nspname,
                    c.relname INTO parent_schema,
                    parent_table
                FROM
                    pg_class c
                    JOIN pg_namespace n ON c.relnamespace = n.oid
                WHERE
                    c.reltoastrelid = r.oid;
                -- Raise a concise NOTICE message
```

```
                RAISE NOTICE 'Parent schema: % | Parent table: % | Toast table: %
 | Number of used OIDs: %', parent_schema, parent_table, r.toast_table, TO_CHAR(o,
 'FM9,999,999,999,999');
            END IF;
        END LOOP;
END
$$;
```

Example output displaying OID usage statistics by TOAST table:

```
NOTICE:  Parent schema: public | Parent table: my_table | Toast table:
 pg_toast.pg_toast_16559 | Number of used OIDs: 45,623,317
NOTICE:  Parent schema: public | Parent table: my_table1 | Toast table:
 pg_toast.pg_toast_45639925 | Number of used OIDs: 10,000
NOTICE:  Parent schema: public | Parent table: my_table2 | Toast table:
 pg_toast.pg_toast_45649931 | Number of used OIDs: 1,000,000
DO
```

The following anonymous block retrieves the maximum assigned OID for each non-empty TOAST table:

```
DO $$
DECLARE
    r record;
    o bigint;
    parent_table text;
    parent_schema text;
BEGIN
    SET LOCAL client_min_messages TO notice;
    FOR r IN
    SELECT
        c.oid,
        c.oid::regclass AS toast_table
    FROM
        pg_class c
    WHERE
        c.relkind = 't'
        AND c.relowner != 10 LOOP
            -- Fetch the max(chunk_id) from the TOAST table
            EXECUTE 'SELECT max(chunk_id) FROM ' || r.toast_table INTO o;
            -- If there's at least one TOASTed chunk, find the associated parent table
 and its schema
            IF o IS NOT NULL THEN
```

```
                SELECT
                    n.nspname,
                    c.relname INTO parent_schema,
                    parent_table
                FROM
                    pg_class c
                    JOIN pg_namespace n ON c.relnamespace = n.oid
                WHERE
                    c.reltoastrelid = r.oid;
                -- Raise a concise NOTICE message
                RAISE NOTICE 'Parent schema: % | Parent table: % | Toast table:
 % | Max chunk_id: %', parent_schema, parent_table, r.toast_table, TO_CHAR(o,
 'FM9,999,999,999,999');
            END IF;
        END LOOP;
END
$$;
```

Example output displaying maximum chunk IDs for TOAST tables:

```
NOTICE:  Parent schema: public | Parent table: my_table | Toast table:
 pg_toast.pg_toast_16559 | Max chunk_id: 45,639,907
NOTICE:  Parent schema: public | Parent table: my_table1 | Toast table:
 pg_toast.pg_toast_45639925 | Max chunk_id: 45,649,929
NOTICE:  Parent schema: public | Parent table: my_table2 | Toast table:
 pg_toast.pg_toast_45649931 | Max chunk_id: 46,649,935
DO
```

Using Performance Insights

The wait events `LWLock:buffer_io` and `LWLock:OidGenLock` appear in Performance Insights during operations that require assigning new Object Identifiers (OIDs). High Average Active Sessions (AAS) for these events typically point to contention during OID assignment and resource management. This is particularly common in environments with high data churn, extensive large data usage, or frequent object creation.

LWLock:buffer_io

`LWLock:buffer_io` is a wait event that occurs when a PostgreSQL session is waiting for I/O operations on a shared buffer to complete. This typically happens when the database reads data from disk into memory or writes modified pages from memory to disk. The `BufferIO` wait event

ensures consistency by preventing multiple processes from accessing or modifying the same buffer while I/O operations are in progress. High occurrences of this wait event may indicate disk bottlenecks or excessive I/O activity in the database workload.

During TOAST operations:

- PostgreSQL allocates OIDs for large objects and ensures their uniqueness by scanning the TOAST table's index.
- Large TOAST indexes may require accessing multiple pages to verify OID uniqueness. This results in increased disk I/O, especially when the buffer pool cannot cache all required pages.

The size of the index directly affects the number of buffer pages that need to be accessed during these operations. Even if the index is not bloated, its sheer size can increase buffer I/O, particularly in high-concurrency or high-churn environments. For more information, see LWLock:BufferIO wait event troubleshooting guide.

LWLock:OidGenLock

`OidGenLock` is a wait event that occurs when a PostgreSQL session is waiting to allocate a new object identifier (OID). This lock ensures that OIDs are generated sequentially and safely, allowing only one process to generate OIDs at a time.

During TOAST operations:

- **OID allocation for chunks in TOAST table** – PostgreSQL assigns OIDs to chunks in TOAST tables when managing large data records. Each OID must be unique to prevent conflicts in the system catalog.
- **High concurrency** – Since access to OID generator is sequential, when multiple sessions are concurrently creating objects that require OIDs, contention for `OidGenLock` can occur. This increases the likelihood of sessions waiting for OID allocation to complete.
- **Dependency on system catalog access** – Allocating OIDs requires updates to shared system catalog tables like `pg_class` and `pg_type`. If these tables experience heavy activity (due to frequent DDL operations), it can increase lock contention for `OidGenLock`.
- **High OID allocation demand** – TOAST heavy workloads with large data records require constant OID allocation, increasing contention.

Additional factors that increase OID contention:

- **Frequent object creation** – Workloads that frequently create and drop objects, such as temporary tables, amplify contention on the global OID counter.
- **Global counter locking** – The global OID counter is accessed serially to ensure uniqueness, creating a single point of contention in high-concurrency environments.

Using Babelfish for Aurora PostgreSQL

Babelfish for Aurora PostgreSQL extends your Aurora PostgreSQL DB cluster with the ability to accept database connections from SQL Server clients. With Babelfish, applications that were originally built for SQL Server can work directly with Aurora PostgreSQL with few code changes compared to a traditional migration and without changing database drivers. For more information about migrating, see Migrating a SQL Server database to Babelfish for Aurora PostgreSQL.

Babelfish provides an additional endpoint for an Aurora PostgreSQL database cluster that allows it to understand the SQL Server wire-level protocol and commonly used SQL Server statements. Client applications that use the Tabular Data Stream (TDS) wire protocol can connect natively to the TDS listener port on Aurora PostgreSQL. To learn more about TDS, see [MS-TDS]: Tabular Data Stream Protocol on the Microsoft website.

> **Note**
>
> Babelfish for Aurora PostgreSQL supports TDS versions 7.1 through 7.4.

Babelfish also provides access to data using the PostgreSQL connection. By default, both SQL dialects supported by Babelfish are available through their native wire protocols at the following ports:

- SQL Server dialect (T-SQL), clients connect to port 1433.
- PostgreSQL dialect (PL/pgSQL), clients connect to port 5432.

Babelfish runs the Transact-SQL (T-SQL) language with some differences. For more information, see Differences between Babelfish for Aurora PostgreSQL and SQL Server.

In the following sections, you can find information about setting up and using a Babelfish for Aurora PostgreSQL DB cluster.

For information about managing Babelfish version updates, see Managing Babelfish for Aurora PostgreSQL version updates.

For information about Active Directory and Kerberos security for Babelfish, see Setting up Kerberos authentication using Active Directory security groups for Babelfish.

Topics

- Babelfish limitations
- Understanding Babelfish architecture and configuration
- Creating a Babelfish for Aurora PostgreSQL DB cluster
- Migrating a SQL Server database to Babelfish for Aurora PostgreSQL
- Database authentication with Babelfish for Aurora PostgreSQL
- Connecting to a Babelfish DB cluster
- Working with Babelfish
- Troubleshooting Babelfish
- Managing Babelfish for Aurora PostgreSQL version updates
- Babelfish for Aurora PostgreSQL reference

Babelfish limitations

The following limitations currently apply to Babelfish for Aurora PostgreSQL:

- Babelfish doesn't support the following Aurora features:
  - Amazon Identity and Access Management
  - Database Activity Streams (DAS)
  - RDS Data API with Aurora PostgreSQL
  - RDS Proxy
  - Salted challenge response authentication mechanism (SCRAM)
  - Query editor
  - Zero-ETL integrations
  - Querying Iceberg and Parquet data
- Babelfish doesn't provide the following client driver API support:
  - API requests with the connection attributes related to Microsoft Distributed Transaction Coordinator (MSDTC) aren't supported. These include XA calls by the SQLServerXAResource class in the SQL server JDBC driver.
- Babelfish currently doesn't support the following Aurora PostgreSQL extensions:
  - `bloom`
  - `btree_gin`
  - `btree_gist`
  - `citext`
  - `cube`
  - `hstore`
  - `hypopg`
  - Logical replication using `pglogical`
  - `ltree`
  - `pgcrypto`
  - Query plan management using `apg_plan_mgmt`

  To learn more about PostgreSQL extensions, see Working with extensions and foreign data wrappers.

- The open source jTDS driver that is designed as an alternative to the Microsoft JDBC driver is not supported.

Understanding Babelfish architecture and configuration

You manage the Aurora PostgreSQL-Compatible Edition DB cluster running Babelfish much as you would any Aurora DB cluster. That is, you benefit from the scalability, high-availability with failover support, and built-in replication provided by an Aurora DB cluster. To learn more about these capabilities, see Managing performance and scaling for Aurora DB clusters, High availability for Amazon Aurora, and Replication with Amazon Aurora. You also have access to many other Amazon tools and utilities, including the following:

- Amazon CloudWatch is a monitoring and observability service that provides you with data and actionable insights. For more information, see Monitoring Amazon Aurora metrics with Amazon CloudWatch.
- Performance Insights is a database performance tuning and monitoring feature that helps you quickly assess the load on your database. To learn more, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.
- Aurora global databases span multiple Amazon Web Services Regions, enabling low latency global reads and providing fast recovery from the rare outage that might affect an entire Amazon Web Services Region. For more information, see Using Amazon Aurora Global Database.
- Automatic software patching keeps your database up-to-date with the latest security and feature patches when they become available.
- Amazon RDS events notify you by email or SMS message of important database events, such as an automated failover. For more information, see Monitoring Amazon Aurora events.

Following, you can learn about Babelfish architecture and how the SQL Server databases that you migrate are handled by Babelfish. When you create your Babelfish DB cluster, you need to make some decisions up front about single database or multiple databases, collations, and other details.

Topics

- Babelfish architecture
- DB cluster parameter group settings for Babelfish
- Understanding Collations in Babelfish for Aurora PostgreSQL
- Managing Babelfish error handling with escape hatches

Babelfish architecture

When you create an Aurora PostgreSQL cluster with Babelfish turned on, Aurora provisions the cluster with a PostgreSQL database named `babelfish_db`. This database is where all migrated SQL Server objects and structures reside.


> **Note**
>
> In an Aurora PostgreSQL cluster, the `babelfish_db` database name is reserved for Babelfish. Creating your own "babelfish_db" database on a Babelfish DB cluster prevents Aurora from successfully provisioning Babelfish.

When you connect to the TDS port, the session is placed in the `babelfish_db` database. From T-SQL, the structure looks similar to being connected to a SQL Server instance. You can see the `master`, `msdb`, and `tempdb` databases, and the `sys.databases` catalog. You can create additional user databases and switch between databases with the USE statement. When you create a SQL Server user database, it's flattened into the `babelfish_db` PostgreSQL database. Your database retains cross-database syntax and semantics equal to or similar to those provided by SQL Server.

Using Babelfish with a single database or multiple databases


When you create an Aurora PostgreSQL cluster to use with Babelfish, you choose between using a single SQL Server database on its own or multiple SQL Server databases together. Your choice affects how the names of SQL Server schemas inside the `babelfish_db` database appear from Aurora PostgreSQL. The migration mode is stored in the `migration_mode` parameter. You must not change this parameter after creating your cluster as you could lose access to all your previously created SQL objects.

In single-db mode, the schema names of the SQL Server database remain the same in the `babelfish_db` database of the PostgreSQL. If you choose to migrate only a single database, the schema names of the migrated user database can be referenced in PostgreSQL with the same names used in SQL Server. For example, the dbo and `smith` schemas reside inside the dbA database.

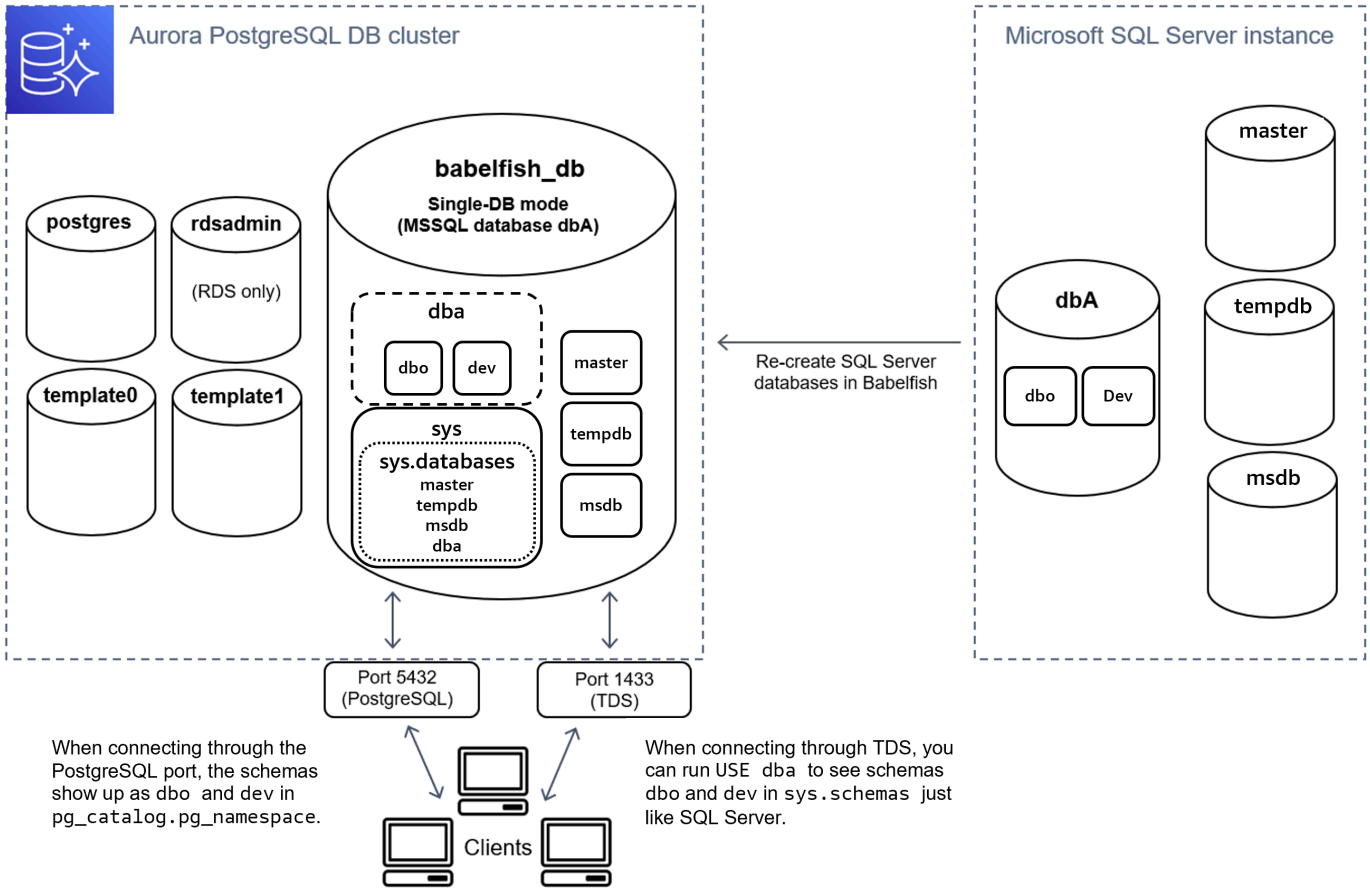

When connecting through TDS, you can run `USE dba` to see schemas dbo and `dev` from T-SQL, as you would in SQL Server. The unchanged schema names are also visible from PostgreSQL.

In multiple-database mode, the schema names of user databases become `dbname_schemaname` when accessed from PostgreSQL. The schema names remain the same when accessed from T-SQL.

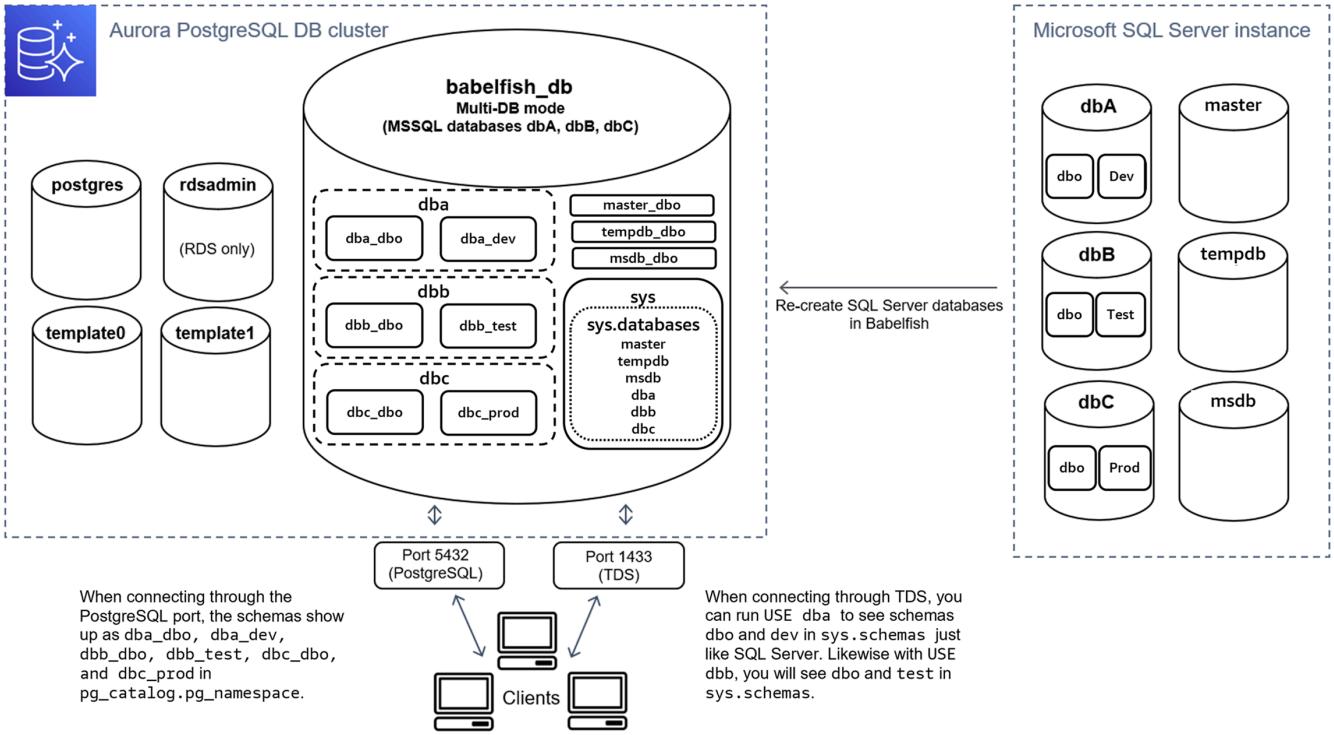

As shown in the image, multiple-database mode and single-database mode are the same as SQL Server when connecting through the TDS port and using T-SQL. For example, `USE dbA` lists schemas dbo and `dev` just as it does in SQL Server. The mapped schema names, such as `dba_dbo` and `dba_dev`, are visible from PostgreSQL.

Each database still contains your schemas. The name of each database is prepended to the name of the SQL Server schema, using an underscore as a delimiter, for example:

- dba contains `dba_dbo` and `dba_dev`.
- dbb contains `dbb_dbo` and `dbb_test`.
- dbc contains `dbc_dbo` and `dbc_prod`.

Inside the `babelfish_db` database, the T-SQL user still needs to run `USE dbname` to change database context, so the look and feel remains similar to SQL Server.

Choosing a migration mode

Each migration mode has advantages and disadvantages. Choose your migration mode based on the number of user databases you have, and your migration plans. After you create a cluster for use with Babelfish, you must not change the migration mode as you might lose access to all your

previously created SQL objects. When choosing a migration mode, consider the requirements of your user databases and clients.

When you create a cluster for use with Babelfish, Aurora PostgreSQL creates the system databases, `master` and `tempdb`. If you created or modified objects in the system databases (`master` or `tempdb`), make sure to recreate those objects in your new cluster. Unlike SQL Server, Babelfish doesn't reinitialize `tempdb` after a cluster reboot.

Use single database migration mode in the following cases:

- If you are migrating a single SQL Server database. In single database mode, migrated schema names when accessed from PostgreSQL are identical to those in original SQL Server schema names. This reduces code changes to existing SQL queries if you want to optimize them to run with a PostgreSQL connection.
- If your end goal is a complete migration to native Aurora PostgreSQL. Before migrating, consolidate your schemas into a single schema (dbo) and then migrate into a single cluster to lessen required changes.

Use multiple database migration mode in the following cases:

- If you want the default SQL Server experience with multiple user databases in the same instance.
- If multiple user databases need to be migrated together.

DB cluster parameter group settings for Babelfish

When you create an Aurora PostgreSQL DB cluster and choose **Turn on Babelfish**, a DB cluster parameter group is created for you automatically if you choose **Create new**. This DB cluster parameter group is based on the Aurora PostgreSQL DB cluster parameter group for the Aurora PostgreSQL version chosen for the install, for example, Aurora PostgreSQL version 14. It's named using the following general pattern:

```
custom-aurora-postgresql14-babelfish-compat-3
```

You can change the following settings during the cluster creation process but some of these can't be changed once they're stored in the custom parameter group, so choose carefully:

- Single database or Multiple databases
- Default collation locale
- Collation name
- DB parameter group

To use an existing Aurora PostgreSQL DB cluster version 13 or higher parameter group, edit the group and set the `babelfish_status` parameter to on. Specify any Babelfish options before creating your Aurora PostgreSQL cluster. To learn more, see Parameter groups for Amazon Aurora.

The following parameters control Babelfish preferences. Unless otherwise stated in the Description, parameters are modifiable. The default value is included in the description. To see the allowable values for any parameter, do as follows:

> **Note**
>
> When you associate a new DB parameter group with a DB instance, the modified static and dynamic parameters are applied only after the DB instance is rebooted. However, if you modify dynamic parameters in the DB parameter group after you associate it with the DB instance, these changes are applied immediately without a reboot.

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Parameter groups** from the navigation menu.

3. Choose the `default.aurora-postgresql14` DB cluster parameter group from the list.
4. Enter the name of a parameter in the search field. For example, enter `babelfishpg_tsql.default_locale` in the search field to display this parameter and its default value and allowable settings.

> **Note**
>
> Babelfish for Aurora PostgreSQL global databases works in secondary regions only if the following parameters are turned on in those regions.

Parameter	Description	Apply Type	Is Modifiable
babelfishpg_tds.tds_default_numeric_scale	Sets the default scale of numeric type to be sent in the TDS column metadata if the engine doesn't specify one. (Default: 8) (Allowable: 0–38)	dynamic	true
babelfishpg_tds.tds_default_numeric_precision	An integer that sets the default precision of numeric type to be sent in the TDS column metadata if the engine doesn't specify one. (Default: 38) (Allowable: 1–38)	dynamic	true
babelfishpg_tds.tds_default_packet_size	An integer that sets the default packet size for connecting SQL Server clients. (Default: 4096) (Allowable: 512–32767)	dynamic	true

Parameter	Description	Apply Type	Is Modifiable
babelfishpg_tds.tds_default_protocol_version	An integer that sets a default TDS protocol version for connecting clients. (Default: DEFAULT) (Allowable: TDSv7.0, TDSv7.1, TDSv7.1.1, TDSv7.2, TDSv7.3A, TDSv7.3B, TDSv7.4, DEFAULT)	dynamic	true
babelfishpg_tds.default_server_name	A string that identifies the default name of the Babelfish server. (Default: Microsoft SQL Server) (Allowable: null)	dynamic	true
babelfishpg_tds.tds_debug_log_level	An integer that sets the logging level in TDS; 0 turns off logging. (Default: 1) (Allowable: 0, 1, 2, 3)	dynamic	true
babelfishpg_tds.listen_addresses	A string that sets the host name or IP address or addresses to listen for TDS on. This parameter can't be modified after the Babelfish DB cluster is created. (Default: *) (Allowable: null)	–	false

Parameter	Description	Apply Type	Is Modifiable
babelfishpg_tds.port	An integer that specifies the TCP port used for requests in SQL Server syntax. (Default: 1433) (Allowable: 1–65535)	static	true
babelfishpg_tds.tds_ssl_encrypt	A boolean that turns encryption on (1) or off (0) for data traversing the TDS listener port. For detailed information about using SSL for client connections, see Babelfish SSL settings and client connections. (Default: 0) (Allowable: 0, 1)	dynamic	true
babelfishpg_tds.tds_ssl_max_protocol_version	A string that specifies the highest SSL/TLS protocol version to use for the TDS session. (Default: 'TLSv1.2') (Allowable: 'TLSv1', 'TLSv1.1', 'TLSv1.2')	dynamic	true

Parameter	Description	Apply Type	Is Modifiable
babelfishpg_tds.tds_ssl_min_protocol_version	A string that specifies the minimum SSL/TLS protocol version to use for the TDS session. (Default: 'TLSv1.2' from Aurora PostgreSQL version 16, 'TLSv1' for versions older than Aurora PostgreSQL version 16) (Allowable: 'TLSv1', 'TLSv1.1', 'TLSv1.2')	dynamic	true
babelfishpg_tds.unix_socket_directories	A string that identifies the TDS server Unix socket directory. This parameter can't be modified after the Babelfish DB cluster is created. (Default: /tmp) (Allowable: null)	–	false
babelfishpg_tds.unix_socket_group	A string that identifies the TDS server Unix socket group. This parameter can't be modified after the Babelfish DB cluster is created. (Default: rdsdb) (Allowable: null)	–	false

Parameter	Description	Apply Type	Is Modifiable
babelfishpg_tsql.default_locale	A string that specifies the default locale used for Babelfish collations. The default locale is the locale only and doesn't include any qualifiers. Set this parameter when you provision a Babelfish DB cluster. After the DB cluster is provisioned, changes to this parameter are ignored. (Default: en_US) (Allowable: See tables)	static	true

Parameter	Description	Apply Type	Is Modifiable
babelfishpg_tsql.migration_mode	A non-modifiable list that specifies support for single- or multiple user databases. Set this parameter when you provision a Babelfish DB cluster. After the DB cluster is provisioned, you can't modify this parameter's value. (Default: multi-db from Aurora PostgreSQL version 16, single-db for versions older than Aurora PostgreSQL version 16) (Allowable: single-db, multi-db,null)	static	true

Parameter	Description	Apply Type	Is Modifiable
babelfishpg_tsql.server_collation_name	A string that specifies the name of the collation used for server-level actions. Set this parameter when you provision a Babelfish DB cluster. After the DB cluster is provisioned, don't modify the value of this parameter. (Default: bbf_unicode_general_ci_as) (Allowable: See tables)	static	true
babelfishpg_tsql.version	A string that sets the output of @@VERSION variable. Don't modify this value for Aurora PostgreSQL DB clusters. (Default: null) (Allowable: default)	dynamic	true

Parameter	Description	Apply Type	Is Modifiable
rds.babelfish_status	A string that sets the state of Babelfish functionality. When this parameter is set to `datatypes only` , Babelfish is turned off but SQL Server data types are still avail able. (Default: off) (Allowable: on, off, datatypesonly)	static	true
unix_socket_permis sions	An integer that sets the TDS server Unix socket permissions. This parameter can't be modified after the Babelfish DB cluster is created. (Default: 0700) (Allowable: 0–511)	–	false

Babelfish SSL settings and client connections

To require SSL/TLS connections to your Babelfish for Aurora PostgreSQL DB cluster, use the `rds.force_ssl` parameter.

- To require SSL/TLS connections, set the `rds.force_ssl` parameter value to 1 (on).
- To turn off required SSL/TLS connections, set the `rds.force_ssl` parameter value to 0 (off).

The default value of this parameter depends on the Aurora PostgreSQL version:

- For Aurora PostgreSQL versions 17 and later: The default value is 1 (on).
- For Aurora PostgreSQL versions 16 and older: The default value is 0 (off).

> **Note**
>
> When you perform a major version upgrade from Aurora PostgreSQL version 16 or earlier to version 17 or later, the default value of the parameter changes from 0 (off) to 1 (on). This change may cause connectivity failures for applications that are not configured for SSL. You can revert to the previous default behavior by setting this parameter to 0 (off).

For driver-specific details, see Connecting to a Babelfish DB cluster.

When a client connects to the TDS port (default `1433`), Babelfish compares the Secure Sockets Layer (SSL) setting sent during the client handshake to the Babelfish SSL parameter setting (`tds_ssl_encrypt`). Babelfish then determines if a connection is allowed. If a connection is allowed, encryption behavior is either enforced or not, depending on your parameter settings and the support for encryption offered by the client.

The table following shows how Babelfish behaves for each combination.

Client SSL setting	Babelfish SSL setting	rds.force_ssl	Connection allowed?	Value returned to client
ENCRYPT_ON	Any	Any	Allowed, the entire connection is encrypted	ENCRYPT_ON

Client SSL setting	Babelfish SSL setting	rds.force_ssl	Connection allowed?	Value returned to client
ENCRYPT_OFF	tds_ssl_encrypt=1	Any	Allowed, the entire connection is encrypted	ENCRYPT_REQ
ENCRYPT_OFF	tds_ssl_encrypt=0	rds.force_ssl=0	Allowed, the login packet is encrypted	ENCRYPT_OFF
ENCRYPT_OFF	tds_ssl_encrypt=0	rds.force_ssl=1	No, connection closed	ENCRYPT_OFF
ENCRYPT_NOT_SUP	tds_ssl_encrypt=0	rds.force_ssl=0	Yes	ENCRYPT_NOT_SUP
ENCRYPT_NOT_SUP	tds_ssl_encrypt=1	Any	No, connection closed	ENCRYPT_REQ
ENCRYPT_NOT_SUP	tds_ssl_encrypt=0	rds.force_ssl=1	No, connection closed	ENCRYPT_NOT_SUP
ENCRYPT_CLIENT_CERT	Any	Any	No, connection closed	Unsupported

Understanding Collations in Babelfish for Aurora PostgreSQL

When you create an Aurora PostgreSQL DB cluster with Babelfish, you choose a collation for your data. A *collation* specifies the sort order and bit patterns that produce the text or characters in a given written human language. A collation includes rules comparing data for a given set of bit patterns. Collation is related to localization. Different locales affect character mapping, sort order, and the like. Collation attributes are reflected in the names of various collations. For information about attributes, see the Babelfish collation attributes table.

Babelfish maps SQL Server collations to comparable collations provided by Babelfish. Babelfish predefines Unicode collations with culturally sensitive string comparisons and sort orders. Babelfish also provides a way to translate the collations in your SQL Server DB to the closest-matching Babelfish collation. Locale-specific collations are provided for different languages and regions.

Some collations specify a code page that corresponds to a client-side encoding. Babelfish automatically translates from the server encoding to the client encoding depending on the collation of each output column.

Babelfish supports the collations listed in the Babelfish supported collations table. Babelfish maps SQL Server collations to comparable collations provided by Babelfish.

Babelfish uses version 153.80 of the International Components for Unicode (ICU) collation library. For more information about ICU collations, see Collation in the ICU documentation. To learn more about PostgreSQL and collation, see Collation Support in the the PostgreSQL documentation.

Topics

- DB cluster parameters that control collation and locale
- Deterministic and nondeterministic collations in Babelfish
- Collations supported at database level in Babelfish
- Server and object Collations in Babelfish
- Default Collation behavior in Babelfish
- Managing collations
- Collation limitations and behavior differences

DB cluster parameters that control collation and locale

The following parameters affect collation behavior.

babelfishpg_tsql.default_locale

This parameter specifies the default locale used by the collation. This parameter is used in combination with attributes listed in the Babelfish collation attributes table to customize collations for a specific language and region. The default value for this parameter is `en-US`.

The default locale applies to all Babelfish collation names that start with "BBF" and to all SQL Server collations that are mapped to Babelfish collations. Changing the setting for this parameter on an existing Babelfish DB cluster doesn't affect the locale of existing collations. For the list of collations, see the Babelfish supported collations table.

babelfishpg_tsql.server_collation_name

This parameter specifies the default collation for the server (Aurora PostgreSQL DB cluster instance) and the database. The default value is `sql_latin1_general_cp1_ci_as`. The `server_collation_name` has to be a `CI_AS` collation because in T-SQL, the server collation determines how identifiers are compared.

When you create your Babelfish DB cluster, you choose the **Collation name** from the selectable list. These include the collations listed in the Babelfish supported collations table. Don't modify the `server_collation_name` after the Babelfish database is created.

The settings you choose when you create your Babelfish for Aurora PostgreSQL DB cluster are stored in the DB cluster parameter group associated with the cluster for these parameters and set its collation behavior.

Deterministic and nondeterministic collations in Babelfish

Babelfish supports deterministic and nondeterministic collations:

- A *deterministic collation* evaluates characters that have identical byte sequences as equal. That means that `x` and `X` aren't equal in a deterministic collation. Deterministic collations can be case-sensitive (CS) and accent-sensitive (AS).
- A *nondeterministic collation* doesn't need an identical match. A nondeterministic collation evaluates `x` and `X` as equal. Nondeterministic collations are case-insensitive (CI) or accent-insensitive (AI), or both.

In the table following, you can find some behavior differences between Babelfish and PostgreSQL when using nondeterministic collations.

Babelfish	PostgreSQL
Supports the LIKE clause for CI_AS collations.	Doesn't support the LIKE clause on nondeterm inistic collations.
Supports the LIKE clause only on the following AI collations from Babelfish version 4.2.0: • bbf_unicode_cp1250_ci_ai • bbf_unicode_cp1250_cs_ai • bbf_unicode_cp1257_ci_ai • bbf_unicode_cp1257_cs_ai • bbf_unicode_cp1_ci_ai • bbf_unicode_cp1_cs_ai • estonian_ci_ai • finnish_swedish_ci_ai • french_ci_ai • latin1_general_ci_ai • latin1_general_cs_ai • modern_spanish_ci_ai • polish_ci_ai • sql_latin1_general_cp1_ci_ai • sql_latin1_general_cp1_cs_ai • traditional_spanish_ci_ai	Doesn't support the LIKE clause on nondeterm inistic collations.

For a list of other limitations and behavior differences for Babelfish compared to SQL Server and PostgreSQL, see Collation limitations and behavior differences.

Babelfish and SQL Server follow a naming convention for collations that describe the collation attributes, as shown in the table following.

Attribute	Description
AI	Accent-insensitive.
AS	Accent-sensitive.
BIN2	BIN2 requests data to be sorted in code point order. Unicode code point order is the same character order for UTF-8, UTF-16, and UCS-2 encodings. Code point order is a fast deterministic collation.
CI	Case-insensitive.
CS	Case-sensitive.
PREF	To sort uppercase letters before lowercase letters, use a PREF collation . If comparison is case-insensitive, the uppercase version of a letter sorts before the lowercase version, if there is no other distinction. The ICU library supports uppercase preference with `colCaseFirst=upper` , but not for CI_AS collations. PREF can be applied only to CS_AS deterministic collations.

Collations supported at database level in Babelfish

The following collations are supported at database level in Babelfish:

- bbf_unicode_bin2
- bbf_unicode_cp1_ci_ai
- bbf_unicode_cp1_ci_as
- bbf_unicode_cp1250_ci_ai
- bbf_unicode_cp1250_ci_as
- bbf_unicode_cp1257_ci_ai
- bbf_unicode_cp1257_ci_as
- estonian_ci_ai
- estonian_ci_as
- finnish_swedish_ci_ai

- finnish_swedish_ci_as
- french_ci_ai
- french_ci_as
- latin1_general_bin2
- latin1_general_ci_ai
- latin1_general_ci_as
- latin1_general_90_bin2
- latin1_general_100_bin2
- latin1_general_140_bin2
- modern_spanish_ci_ai
- modern_spanish_ci_as
- polish_ci_ai
- polish_ci_as
- sql_latin1_general_cp1_ci_ai
- sql_latin1_general_cp1_ci_as
- sql_latin1_general_cp1250_ci_as
- sql_latin1_general_cp1251_ci_as
- sql_latin1_general_cp1257_ci_as
- traditional_spanish_ci_ai
- traditional_spanish_ci_as

Note

To use a different collation at the database level, ensure it matches the server-level collation. For more information, see Server and object Collations in Babelfish

Server and object Collations in Babelfish

Use the following collations as a server collation or an object collation.

Collation ID	Notes

Collation ID	Notes
bbf_unicode_general_ci_as	Supports case-insensitive comparison and the LIKE operator.
bbf_unicode_cp1_ci_as	Nondeterministic collation also known as CP1252.
bbf_unicode_CP1250_ci_as	Nondeterministic collation used to represent texts in Central European and Eastern European languages that use Latin scri pt.
bbf_unicode_CP1251_ci_as	Nondeterministic collation for languages that use the Cyrillic script.
bbf_unicode_cp1253_ci_as	Nondeterministic collation used to represent modern Greek.
bbf_unicode_cp1254_ci_as	Nondeterministic collation that supports Turkish.
bbf_unicode_cp1255_ci_as	Nondeterministic collation that supports Hebrew.
bbf_unicode_cp1256_ci_as	Nondeterministic collation used to write languages that use Arabic script.
bbf_unicode_cp1257_ci_as	Nondeterministic collation used to support Estonian, Latvian, and Lithuanian languages.
bbf_unicode_cp1258_ci_as	Nondeterministic collation used to write Vietnamese characte rs.
bbf_unicode_cp874_ci_as	Nondeterministic collation used to write Thai characters.
sql_latin1_general_cp1250_c i_as	Nondeterministic single-byte character encoding used to represent Latin characters.

Collation ID	Notes
sql_latin1_general_cp1251_ci_as	Nondeterministic collation that supports Latin characters.
sql_latin1_general_cp1_ci_as	Nondeterministic collation that supports Latin characters.
sql_latin1_general_cp1253_ci_as	Nondeterministic collation that supports Latin characters.
sql_latin1_general_cp1254_ci_as	Nondeterministic collation that supports Latin characters.
sql_latin1_general_cp1255_ci_as	Nondeterministic collation that supports Latin characters.
sql_latin1_general_cp1256_ci_as	Nondeterministic collation that supports Latin characters.
sql_latin1_general_cp1257_ci_as	Nondeterministic collation that supports Latin characters.
sql_latin1_general_cp1258_ci_as	Nondeterministic collation that supports Latin characters.
chinese_prc_ci_as	Nondeterministic collation that supports Chinese (PRC).
cyrillic_general_ci_as	Nondeterministic collation that supports Cyrillic.
finnish_swedish_ci_as	Nondeterministic collation that supports Finnish.

Collation ID	Notes
french_ci_as	Nondeterministic collation that supports French.
japanese_ci_as	Nondeterministic collation that supports Japanese. Supported in Babelfish 2.1.0 and higher releases.
korean_wansung_ci_as	Nondeterministic collation that supports Korean (with dictionary sort).
latin1_general_ci_as	Nondeterministic collation that supports Latin characters.
modern_spanish_ci_as	Nondeterministic collation that supports Modern Spanish.
polish_ci_as	Nondeterministic collation that supports Polish.
thai_ci_as	Nondeterministic collation that supports Thai.
traditional_spanish_ci_as	Nondeterministic collation that supports Spanish (traditional sort).
turkish_ci_as	Nondeterministic collation that supports Turkish.
ukrainian_ci_as	Nondeterministic collation that supports Ukrainian.
vietnamese_ci_as	Nondeterministic collation that supports Vietnamese.

You can use the following collations as object collations.

Dialect	Deterministic options	Nondeterministic options
Arabic	Arabic_CS_AS	Arabic_CI_AS

Dialect	Deterministic options	Nondeterministic options
		Arabic_CI_AI
Arabic script	BBF_Unicode_CP1256_CS_AS BBF_Unicode_Pref_CP1256_CS_AS	BBF_Unicode_CP1256_CI_AI BBF_Unicode_CP1256_CS_AI
Binary	latin1_general_bin2 BBF_Unicode_BIN2	–
Central European and Eastern European languages that use Latin script	BBF_Unicode_CP1250_CS_AS BBF_Unicode_Pref_CP1250_CS_AS	BBF_Unicode_CP1250_CI_AI BBF_Unicode_CP1250_CS_AI
Chinese	Chinese_PRC_CS_AS	Chinese_PRC_CI_AS Chinese_PRC_CI_AI
Cyrillic_General	Cyrillic_General_CS_AS	Cyrillic_General_CI_AS Cyrillic_General_CI_AI
Cyrillic script	BBF_Unicode_CP1251_CS_AS BBF_Unicode_Pref_CP1251_CS_AS	BBF_Unicode_CP1251_CI_AI BBF_Unicode_CP1251_CS_AI
Estonian	Estonian_CS_AS	Estonian_CI_AS Estonian_CI_AI

Dialect	Deterministic options	Nondeterministic options
Estonian, Latvian, and Lithuanian	BBF_Unicode_CP1257_CS_AS BBF_Unicode_Pref_CP1257_CS_AS	BBF_Unicode_CP1257_CI_AI BBF_Unicode_CP1257_CS_AI
Finnish_Swedish	Finnish_Swedish_CS_AS	Finnish_Swedish_CI_AS Finnish_Swedish_CI_AI
French	French_CS_AS	French_CI_AS French_CI_AI
Greek	Greek_CS_AS	Greek_CI_AS Greek_CI_AI
Hebrew	BBF_Unicode_CP1255_CS_AS BBF_Unicode_Pref_CP1255_CS_AS Hebrew_CS_AS	BBF_Unicode_CP1255_CI_AI BBF_Unicode_CP1255_CS_AI Hebrew_CI_AS Hebrew_CI_AI
Japanese (Babelfish 2.1.0 and higher)	Japanese_CS_AS	Japanese_CI_AI Japanese_CI_AS
Korean_Wamsung	Korean_Wamsung_CS_AS	Korean_Wamsung_CI_AS Korean_Wamsung_CI_AI

Dialect	Deterministic options	Nondeterministic options
Latin characters for code page CP1252	latin1_general_cs_as BBF_Unicode_General_CS_AS BBF_Unicode_General_Pref_CS_AS BBF_Unicode_Pref_CP1_CS_AS BBF_Unicode_CP1_CS_AS	latin1_general_ci_as latin1_general_ci_ai latin1_general_cs_ai BBF_Unicode_General_CI_AI BBF_Unicode_General_CS_AI BBF_Unicode_CP1_CI_AI BBF_Unicode_CP1_CS_AI
Modern Greek	BBF_Unicode_CP1253_CS_AS BBF_Unicode_Pref_CP1253_CS_AS	BBF_Unicode_CP1253_CI_AI BBF_Unicode_CP1253_CS_AI
Modern_Spanish	Modern_Spanish_CS_AS	Modern_Spanish_CI_AS Modern_Spanish_CI_AI
Mongolian	Mongolian_CS_AS	Mongolian_CI_AS Mongolian_CI_AI
Polish	Polish_CS_AS	Polish_CI_AS Polish_CI_AI
Thai	BBF_Unicode_CP874_CS_AS BBF_Unicode_Pref_CP874_CS_AS Thai_CS_AS	BBF_Unicode_CP874_CI_AI BBF_Unicode_CP874_CS_AI Thai_CI_AS, Thai_CI_AI

Dialect	Deterministic options	Nondeterministic options
Traditional_Spanish	Traditional_Spanish_CS_AS	Traditional_Spanish_CI_AS Traditional_Spanish_CI_AI
Turkish	BBF_Unicode_CP1254_CS_AS BBF_Unicode_Pref_CP1254_CS_AS Turkish_CS_AS	BBF_Unicode_CP1254_CI_AI BBF_Unicode_CP1254_CS_AI Turkish_CI_AS, Turkish_CI_AI
Ukranian	Ukranian_CS_AS	Ukranian_CI_AS Ukranian_CI_AI
Vietnamese	BBF_Unicode_CP1258_CS_AS BBF_Unicode_Pref_CP1258_CS_AS Vietnamese_CS_AS	BBF_Unicode_CP1258_CI_AI BBF_Unicode_CP1258_CS_AI Vietnamese_CI_AS Vietnamese_CI_AI

Default Collation behavior in Babelfish

Earlier, the default collation of the collatable datatypes was `pg_catalog.default`. The datatypes and the objects that depends on these datatypes follows cases-sensitive collation. This condition potentially impacts the T-SQL objects of the data set with case-insensitive collation. Starting with Babelfish 2.3.0, the default collation for the collatable data types (except TEXT and NTEXT) is the same as the collation in the `babelfishpg_tsql.server_collation_name` parameter. When you upgrade to Babelfish 2.3.0, the default collation is picked automatically at the time of DB cluster creation, which doesn't create any visible impact.

Managing collations

The ICU library provides collation version tracking to ensure that indexes that depend on collations can be reindexed when a new version of ICU becomes available. To see if your current database has

collations that need refreshing, you can use the following query after connecting using `psql` or or pgAdmin:

```
SELECT pg_describe_object(refclassid, refobjid,
    refobjsubid) AS "Collation",
    pg_describe_object(classid, objid, objsubid) AS "Object"
    FROM pg_depend d JOIN pg_collation c ON refclassid = 'pg_collation'::regclass
    AND refobjid = c.oid WHERE c.collversion <> pg_collation_actual_version(c.oid)
    ORDER BY 1, 2;
```

This query returns output such as the following:

```
 Collation | Object
-----------+--------
(0 rows)
```

In this example, no collations need to be updated.

To get a listing of the predefined collations in your Babelfish database, you can use `psql` or pgAdmin with the following query:

```
SELECT * FROM pg_collation;
```

Predefined collations are stored in the `sys.fn_helpcollations` table. You can use the following command to display information about a collation (such as its lcid, style, and collate flags). To get a listing of all collations by using `sqlcmd`, connect to the T-SQL port (1433, by default) and run the following query:

```
1> :setvar SQLCMDMAXVARTYPEWIDTH 40
2> :setvar SQLCMDMAXFIXEDTYPEWIDTH 40
3> SELECT * FROM fn_helpcollations()
4> GO
name                                  description
------------------------------------- ----------------------------------------
arabic_cs_as                          Arabic, case-sensitive, accent-sensitive
arabic_ci_ai                          Arabic, case-insensitive, accent-insensi
arabic_ci_as                          Arabic, case-insensitive, accent-sensiti
bbf_unicode_bin2                      Unicode-General, case-sensitive, accent-
bbf_unicode_cp1250_ci_ai              Default locale, code page 1250, case-ins
bbf_unicode_cp1250_ci_as              Default locale, code page 1250, case-ins
bbf_unicode_cp1250_cs_ai              Default locale, code page 1250, case-sen
```

```
bbf_unicode_cp1250_cs_as                Default locale, code page 1250, case-sen
bbf_unicode_pref_cp1250_cs_as           Default locale, code page 1250, case-sen
bbf_unicode_cp1251_ci_ai                Default locale, code page 1251, case-ins
bbf_unicode_cp1251_ci_as                Default locale, code page 1251, case-ins
bbf_unicode_cp1254_ci_ai                Default locale, code page 1254, case-ins
...
(124 rows affected)
```

Lines 1 and 2 shown in the example narrow the output for documentation readability purposes only.

```
1> SELECT SERVERPROPERTY('COLLATION')
2> GO
serverproperty
------------------------------------------------------------------------
sql_latin1_general_cp1_ci_as

(1 rows affected)
1>
```

Collation limitations and behavior differences

Babelfish uses the ICU library for collation support. PostgreSQL is built with a specific version of ICU and can match at most one version of a collation. Variations across versions are unavoidable, as are minor variations across time as languages evolve. In the following list you can find known limitations and behavior variations of Babelfish collations:

- **Indexes and collation type dependency** – An index on a user-defined type that depends on the International Components for Unicode (ICU) collation library (the library used by Babelfish) isn't invalidated when the library version changes.
- **COLLATIONPROPERTY function** – Collation properties are implemented only for the supported Babelfish BBF collations. For more information, see the Babelfish supported collations table.
- **Unicode sorting rule differences** – SQL collations for SQL Server sort Unicode-encoded data (`nchar` and `nvarchar`) differently than data that's not Unicode-encoded (`char` and `varchar`). Babelfish databases are always UTF-8 encoded and always apply Unicode sorting rules consistently, regardless of data type, so the sort order for `char` or `varchar` is the same as it is for `nchar` or `nvarchar`.
- **Secondary-equal collations and sorting behavior** – The default ICU Unicode secondary-equal (`CI_AS`) collation sorts punctuation marks and other nonalphanumeric characters before

numeric characters, and numeric characters before alphabetic characters. However, the order of punctuation and other special characters is different.

- **Tertiary collations, workaround for ORDER BY** – SQL collations, such as `SQL_Latin1_General_Pref_CP1_CI_AS`, support the `TERTIARY_WEIGHTS` function and the ability to sort strings that compare equally in a `CI_AS` collation to be sorted uppercase first: `ABC`, `ABc`, `AbC`, `Abc`, `aBC`, `aBc`, `abC`, and finally `abc`. Thus, the `DENSE_RANK OVER (ORDER BY column)` analytic function assesses these strings as having the same rank but orders them uppercase first within a partition.

  You can get a similar result with Babelfish by adding a `COLLATE` clause to the `ORDER BY` clause that specifies a tertiary `CS_AS` collation that specifies `@colCaseFirst=upper`. However, the `colCaseFirst` modifier applies only to strings that are tertiary-equal (rather than secondary-equal such as with `CI_AS` collation). Thus, you can't emulate tertiary SQL collations using a single ICU collation.

  As a workaround, we recommend that you modify applications that use the `SQL_Latin1_General_Pref_CP1_CI_AS` collation to use the `BBF_SQL_Latin1_General_CP1_CI_AS` collation first. Then add `COLLATE BBF_SQL_Latin1_General_Pref_CP1_CS_AS` to any `ORDER BY` clause for this column.
- **Character expansion** – A character expansion treats a single character as equal to a sequence of characters at the primary level. SQL Server's default `CI_AS` collation supports character expansion. ICU collations support character expansion for accent-insensitive collations only.

  When character expansion is required, then use a `AI` collation for comparisons. However, such collations aren't currently supported by the LIKE operator.
- **char and varchar encoding** – When SQL collations are used for `char` or `varchar` data types, the sort order for characters preceding ASCII 127 is determined by the specific code page for that SQL collation. For SQL collations, strings declared as `char` or `varchar` might sort differently than strings declared as `nchar` or `nvarchar`.

  PostgreSQL encodes all strings with the database encoding, so all characters are converted to UTF-8 and sorted using Unicode rules.

  Because SQL collations sort nchar and nvarchar data types using Unicode rules, Babelfish encodes all strings on the server using UTF-8. Babelfish sorts nchar and nvarchar strings the same way it sorts char and varchar strings, using Unicode rules.

- **Supplementary character** – The SQL Server functions `NCHAR`, `UNICODE`, and `LEN` support characters for code-points outside the Unicode Basic Multilingual Plane (BMP). In contrast, non-SC collations use surrogate pair characters to handle supplementary characters. For Unicode data types, SQL Server can represent up to 65,535 characters using UCS-2, or the full Unicode range (1,114,114 characters) if supplementary characters are used.
- **Kana-sensitive (KS) collations** – A Kana-sensitive (KS) collation is one that treats `Hiragana` and `Katakana` Japanese Kana characters differently. ICU supports the Japanese collation standard `JIS X 4061`. The now deprecated `colhiraganaQ [on | off]` locale modifier might provide the same functionality as KS collations. However, KS collations of the same name as SQL Server aren't currently supported by Babelfish.
- **Width-sensitive (WS) collations** – When a single-byte character (half-width) and the same character represented as a double-byte character (full-width) are treated differently, the collation is called *width-sensitive (WS)*. WS collations with the same name as SQL Server aren't currently supported by Babelfish.
- **Variation-selector sensitive (VSS) collations** – Variation-selector sensitive (VSS) collations distinguish between ideographic variation selectors in Japanese collations `Japanese_Bushu_Kakusu_140` and `Japanese_XJIS_140`. A variation sequence is made up of a base character plus an additional variation selector. If you don't select the `_VSS` option, the variation selector isn't considered in the comparison.

  VSS collations aren't currently supported by Babelfish.
- **BIN and BIN2 collations** – A BIN2 collation sorts characters according to code point order. The byte-by-byte binary order of UTF-8 preserves Unicode code point order, so this is also likely to be the best-performing collation. If Unicode code point order works for an application, consider using a BIN2 collation. However, using a BIN2 collation can result in data being displayed on the client in an order that is culturally unexpected. New mappings to lowercase characters are added to Unicode as time progresses, so the `LOWER` function might perform differently on different versions of ICU. This is a special case of the more general collation versioning problem rather than as something specific to the BIN2 collation.

  Babelfish provides the `BBF_Latin1_General_BIN2` collation with the Babelfish distribution to collate in Unicode code point order. In a BIN collation only the first character is sorted as a wchar. Remaining characters are sorted byte-by-byte, effectively in code point order according to its encoding. This approach doesn't follow Unicode collation rules and isn't supported by Babelfish.
- **Non-deterministic collations and CHARINDEX limitation** – For Babelfish releases older than version 2.1.0, you can't use CHARINDEX with non-deterministic collations. By default, Babelfish

uses a case-insensitive (non-deterministic) collation. Using CHARINDEX for older versions of Babelfish raises the following runtime error:

```
nondeterministic collations are not supported for substring searches
```

> **Note**
>
> This limitation and workaround apply to Babelfish version 1.x only (Aurora PostgreSQL 13.x versions). Babelfish 2.1.0 and higher releases don't have this issue.

You can work around this issue in one of the following ways:

- Explicitly convert the expression to a case-sensitive collation and case-fold both arguments by applying LOWER or UPPER. For example, `SELECT charindex('x', a) FROM t1` would become the following:

  ```
  SELECT charindex(LOWER('x'), LOWER(a COLLATE sql_latin1_general_cp1_cs_as)) FROM t1
  ```

- Create a SQL function f_charindex, and replace CHARINDEX calls with calls to the following function:

  ```
  CREATE function f_charindex(@s1 varchar(max), @s2 varchar(max)) RETURNS int
  AS
  BEGIN
  declare @i int = 1
  WHILE len(@s2) >= len(@s1)
  BEGIN
    if LOWER(@s1) = LOWER(substring(@s2,1,len(@s1))) return @i
    set @i += 1
    set @s2 = substring(@s2,2,999999999)
  END
  return 0
  END
  go
  ```

Managing Babelfish error handling with escape hatches

Babelfish mimics SQL behavior for control flow and transaction state whenever possible. When Babelfish encounters an error, it returns an error code similar to the SQL Server error code. If Babelfish can't map the error to a SQL Server code, it returns a fixed error code (`33557097`) and takes specific actions based on the type of error, as follows:

- For compile time errors, Babelfish rolls back the transaction.
- For runtime errors, Babelfish ends the batch and rolls back the transaction.
- For protocol error between client and server, the transaction isn't rolled back.

If an error code can't be mapped to an equivalent code and the code for a similar error is available, the error code is mapped to the alternative code. For example, the behaviors that cause SQL Server codes `8143` and `8144` are both mapped to `8143`.

Errors that can't be mapped don't respect a `TRY... CATCH` construct.

You can use `@@ERROR` to return a SQL Server error code, or the `@@PGERROR` function to return a PostgreSQL error code. You can also use the `fn_mapped_system_error_list` function to return a list of mapped error codes. For information about PostgreSQL error codes, see the PostgreSQL website.

Modifying Babelfish escape hatch settings

To handle statements that might fail, Babelfish defines certain options called escape hatches. An *escape hatch* is an option that specifies Babelfish behavior when it encounters an unsupported feature or syntax.

You can use the `sp_babelfish_configure` stored procedure to control the settings of an escape hatch. Use the script to set the escape hatch to `ignore` or `strict`. If it's set to `strict`, Babelfish returns an error that you need to correct before continuing.

To apply changes to the current session and on the cluster level, include the `server` keyword.

The usage is as follows:

- To list all escape hatches and their status, plus usage information, run `sp_babelfish_configure`.

- To list the named escape hatches and their values, for the current session or cluster-wide, run the command `sp_babelfish_configure 'hatch_name'` where *hatch_name* is the identifier of one or more escape hatches. *hatch_name* can use SQL wildcards, such as '%'.
- To set one or more escape hatches to the value specified, run `sp_babelfish_configure ['hatch_name' [, 'strict'|'ignore' [, 'server']]]`. To make the settings permanent on a cluster-wide level, include the `server` keyword, such as shown in the following:

  ```
  EXECUTE sp_babelfish_configure 'escape_hatch_unique_constraint', 'ignore', 'server'
  ```

  To set them for the current session only, don't use `server`.
- To reset all escape hatches to their default values, run `sp_babelfish_configure 'default'` (Babelfish 1.2.0 and higher).

The string identifying the hatch (or hatches) can include SQL wildcards. For example, the following sets all syntax escape hatches to `ignore` for the Aurora PostgreSQL cluster.

```
EXECUTE sp_babelfish_configure '%', 'ignore', 'server'
```

In the following table you can find descriptions and default values for the Babelfish predefined escape hatches.

Escape hatch	Description	Default
`escape_hatch_checkpoint`	Allows the use of CHECKPOINT statement in the procedural code, but the CHECKPOINT statement is currently not implemented.	ignore
`escape_hatch_constraint_name_for_default`	Controls Babelfish behavior related to default constraint names.	ignore
`escape_hatch_database_misc_options`	Controls Babelfish behavior related to the following options on CREATE DATABASE:	ignore

Escape hatch	Description	Default
	CONTAINMENT, DB_CHAINING, TRUSTWORTHY, PERSISTENT_LOG_BUFFER.	
`escape_hatch_for_replication`	Controls Babelfish behavior related to the [NOT] FOR REPLICATION clause when creating or altering a table.	strict
`escape_hatch_fulltext`	Controls Babelfish behavior related to FULLTEXT features, such a DEFAULT_FULLTEXT_LANGUAGE in CREATE/ALTER DATABASE, CREATE FULLTEXT INDEX, or sp_fulltext_database.	ignore
`escape_hatch_ignore_dup_key`	Controls Babelfish behavior related to CREATE/ALTER TABLE and CREATE INDEX. When IGNORE_DUP_KEY=ON, raises an error when set to `strict` (the default) or ignores the error when set to `ignore` (Babelfish version 1.2.0 and higher).	strict
`escape_hatch_index_clustering`	Controls Babelfish behavior related to the CLUSTERED or NONCLUSTERED keywords for indexes and PRIMARY KEY or UNIQUE constraints. When CLUSTERED is ignored, the index or constraint is still created as if NONCLUSTERED was specified.	ignore

Escape hatch	Description	Default
`escape_hatch_index_columnstore`	Controls Babelfish behavior related to the COLUMNSTORE clause. If you specify `ignore`, Babelfish creates a regular B-tree index.	strict
`escape_hatch_join_hints`	Controls the behavior of keywords in a JOIN operator: LOOP, HASH, MERGE, REMOTE, REDUCE, REDISTRIBUTE, REPLICATE.	ignore
`escape_hatch_language_non_english`	Controls Babelfish behavior related to languages other than English for onscreen messages. Babelfish currently supports only `us_english` for onscreen messages. SET LANGUAGE might use a variable containing the language name, so the actual language being set can only be detected at run time.	strict
`escape_hatch_login_hashed_password`	When ignored, suppresses the error for the `HASHED` keyword for `CREATE LOGIN` and `ALTER LOGIN`.	strict

Escape hatch	Description	Default
escape_hatch_login_misc_options	When ignored, suppresses the error for other keywords besides HASHED, MUST_CHANGE , OLD_PASSWORD , and UNLOCK for CREATE LOGIN and ALTER LOGIN.	strict
escape_hatch_login_old_password	When ignored, suppresses the error for the OLD_PASSWORD keyword for CREATE LOGIN and ALTER LOGIN.	strict
escape_hatch_login_password_must_change	When ignored, suppresses the error for the MUST_CHANGE keyword for CREATE LOGIN and ALTER LOGIN.	strict
escape_hatch_login_password_unlock	When ignored, suppresses the error for the UNLOCK keyword for CREATE LOGIN and ALTER LOGIN.	strict
escape_hatch_nocheck_add_constraint	Controls Babelfish behavior related to the WITH CHECK or NOCHECK clause for constraints.	strict
escape_hatch_nocheck_existing_constraint	Controls Babelfish behavior related to FOREIGN KEY or CHECK constraints.	strict

Escape hatch	Description	Default
escape_hatch_query_hints	Controls Babelfish behavior related to query hints. When this option is set to ignore, the server ignores hints that use the OPTION (...) clause to specify query processing aspects. Examples include SELECT FROM ... OPTION(MERGE JOIN HASH, MAXRECURSION 10)).	ignore
escape_hatch_rowversion	Controls the behavior of the ROWVERSION and TIMESTAMP datatypes. For usage information, see Using Babelfish features with limited implementation.	strict
escape_hatch_schemabinding_function	Controls Babelfish behavior related to the WITH SCHEMABINDING clause. By default, the WITH SCHEMABINDING clause is ignored when specified with the CREATE or ALTER FUNCTION command.	ignore
escape_hatch_schemabinding_procedure	Controls Babelfish behavior related to the WITH SCHEMABINDING clause. By default, the WITH SCHEMABINDING clause is ignored when specified with the CREATE or ALTER PROCEDURE command.	ignore

Escape hatch	Description	Default
escape_hatch_rowguidcol_column	Controls Babelfish behavior related to the ROWGUIDCOL clause when creating or altering a table.	strict
escape_hatch_schemabinding_trigger	Controls Babelfish behavior related to the WITH SCHEMABINDING clause. By default, the WITH SCHEMABINDING clause is ignored when specified with the CREATE or ALTER TRIGGER command.	ignore
escape_hatch_schemabinding_view	Controls Babelfish behavior related to the WITH SCHEMABINDING clause. By default, the WITH SCHEMABINDING clause is ignored when specified with the CREATE or ALTER VIEW command.	ignore
escape_hatch_session_settings	Controls Babelfish behavior toward unsupported session-level SET statements.	ignore
escape_hatch_showplan_all	Controls Babelfish behavior related to SET SHOWPLAN_ALL and SET STATISTICS PROFILE. When set to ignore, they behave like SET BABELFISH_SHOWPLAN_ALL and SET BABELFISH_STATISTICS PROFILE; when set to strict, they are silently ignored.	strict

Escape hatch	Description	Default
`escape_hatch_storage_on_partition`	Controls Babelfish behavior related to the `ON partition_scheme column` clause when defining partitioning. Babelfish currently doesn't implement partitioning.	strict
`escape_hatch_storage_options`	Escape hatch on any storage option used in CREATE, ALTER DATABASE, TABLE, INDEX. This includes clauses (LOG) ON, TEXTIMAGE_ON, FILESTREAM_ON that define storage locations (partitions, file groups) for tables, indexes, and constraints, and also for a database. This escape hatch setting applies to all of these clauses (including ON [PRIMARY] and ON "DEFAULT"). The exception is when a partition is specified for a table or index with ON partition_scheme (column).	ignore
`escape_hatch_table_hints`	Controls the behavior of table hints specified using the WITH (...) clause.	ignore

Escape hatch	Description	Default
`escape_hatch_unique_constraint`	When set to strict, an obscure semantic difference between SQL Server and PostgreSQL in handling NULL values on indexed columns can raise errors. The semantic difference only emerges in unrealistic use cases, so you can set this escape hatch to 'ignore' to avoid seeing the error. Deprecated from the following versions: 3.6.0 and higher versions, 4.2.0 and higher versions	strict

Creating a Babelfish for Aurora PostgreSQL DB cluster

Babelfish for Aurora PostgreSQL is supported on all supported Aurora PostgreSQL versions, 13 and higher.


You can use the Amazon Web Services Management Console or the Amazon CLI to create an Aurora PostgreSQL cluster with Babelfish.

> **Note**
>
> In an Aurora PostgreSQL cluster, the `babelfish_db` database name is reserved for Babelfish. Creating your own "babelfish_db" database on a Babelfish for Aurora PostgreSQL prevents Aurora from successfully provisioning Babelfish.

Console


To create a cluster with Babelfish running with the Amazon Web Services Management Console

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/, and choose **Create database**.

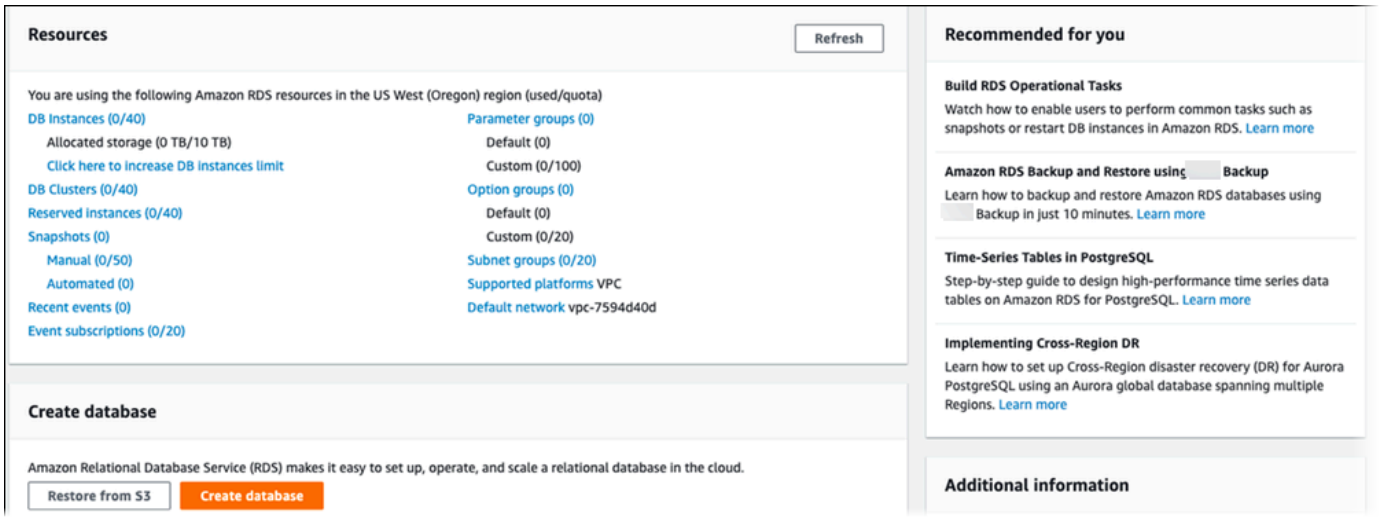

2. For **Choose a database creation method**, do one of the following:
   - To specify detailed engine options, choose **Standard create**.
   - To use preconfigured options that support best practices for an Aurora cluster, choose **Easy create**.
3. For **Engine type**, choose **Aurora (PostgreSQL Compatible)**.

4. For **Available versions**, choose an Aurora PostgreSQL version. To get the latest Babelfish features, choose the highest Aurora PostgreSQL major version. Babelfish is supported on all supported Aurora PostgreSQL versions, 13 and higher.

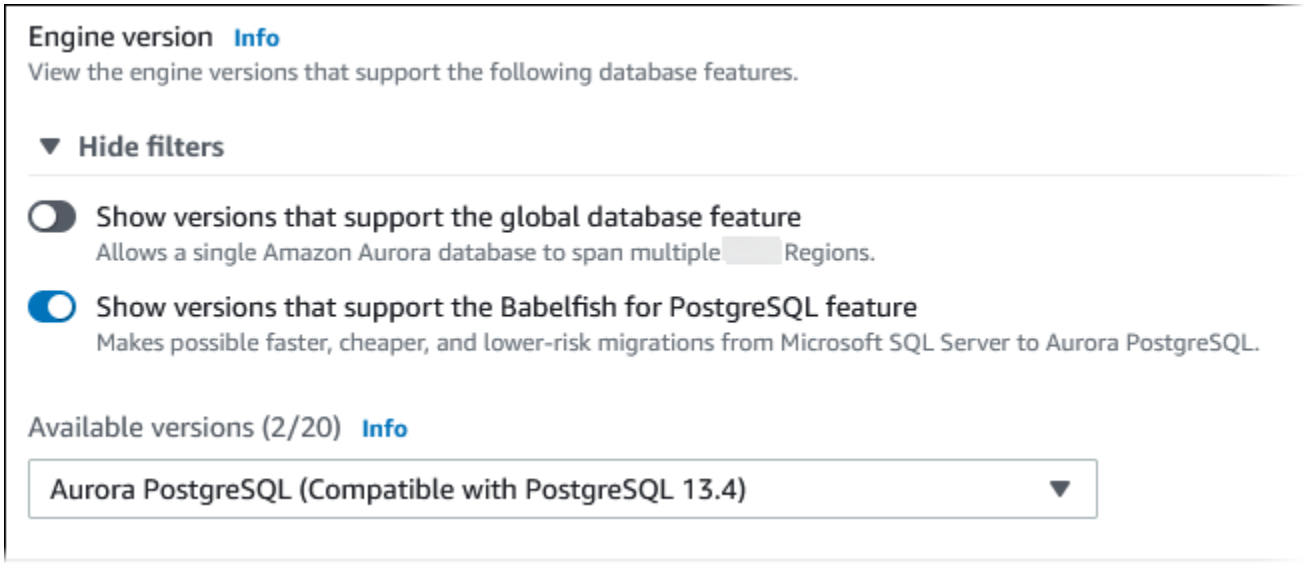


5. For **Templates**, choose the template that matches your use case.
6. For **DB cluster identifier**, enter a name that you can easily find later in the DB cluster list.
7. For **Master username**, enter an administrator user name. The default value for Aurora PostgreSQL is `postgres`. You can accept the default or choose a different name. For example, to follow the naming convention used on your SQL Server databases, you can enter `sa` (system administrator) for the Master username.

   If you don't create a user named `sa` at this time, you can create one later with your choice of client. After creating the user, use the `ALTER SERVER ROLE` command to add it to the `sysadmin` group (role) for the cluster.

   > **Warning**
   >
   > Master username must always use lowercase characters failing which the DB cluster can't connect to Babelfish via the TDS port.

8. For **Master password**, create a strong password and confirm the password.
9. For the options that follow, until the **Babelfish settings** section, specify your DB cluster settings. For information about each setting, see Settings for Aurora DB clusters.
10. To make Babelfish functionality available, select the **Turn on Babelfish** box.

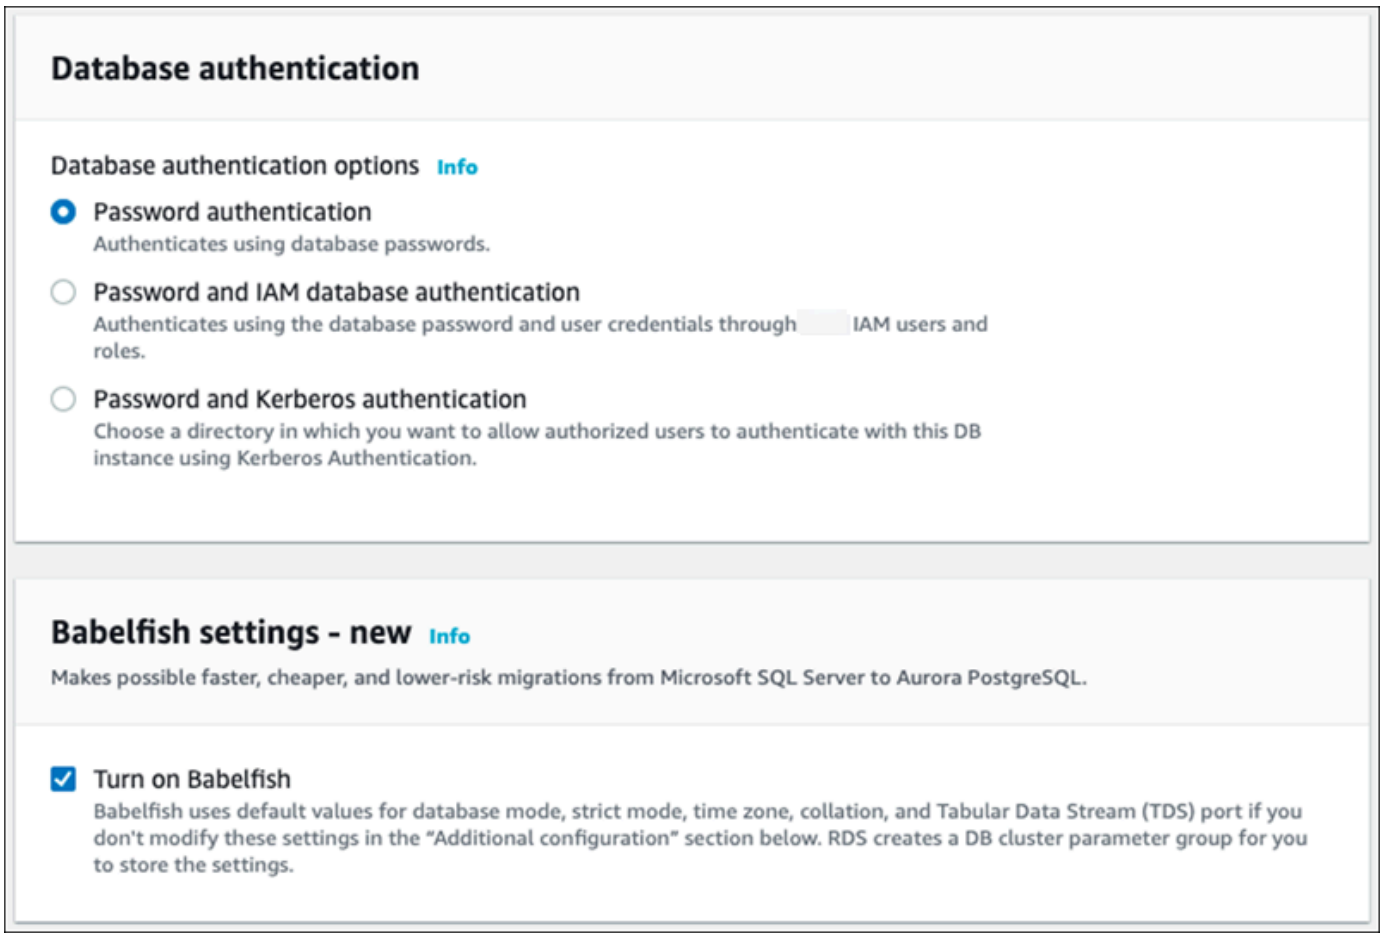

11. For **DB cluster parameter group**, do one of the following:

    - Choose **Create new** to create a new parameter group with Babelfish turned on.
    - Choose **Choose existing** to use an existing parameter group. If you use an existing group, make sure to modify the group before creating the cluster and add values for Babelfish parameters. For information about Babelfish parameters, see DB cluster parameter group settings for Babelfish.

      If you use an existing group, provide the group name in the box that follows.

12. For **Database migration mode**, choose one of the following:


    - **Single database** to migrate a single SQL Server database.

      In some cases, you might migrate multiple user databases together, with your end goal a complete migration to native Aurora PostgreSQL without Babelfish. If the final applications require consolidated schemas (a single dbo schema), make sure to first consolidate your SQL


Server databases into a single SQL server database. Then migrate to Babelfish using **Single database** mode.

- **Multiple databases** to migrate multiple SQL Server databases (originating from a single SQL Server installation). Multiple database mode doesn't consolidate multiple databases that don't originate from a single SQL Server installation. For information about migrating multiple databases, see Using Babelfish with a single database or multiple databases.

> **Note**
>
> From Aurora PostgreSQL 16 version, **Multiple databases** is chosen by default as the Database migration mode.

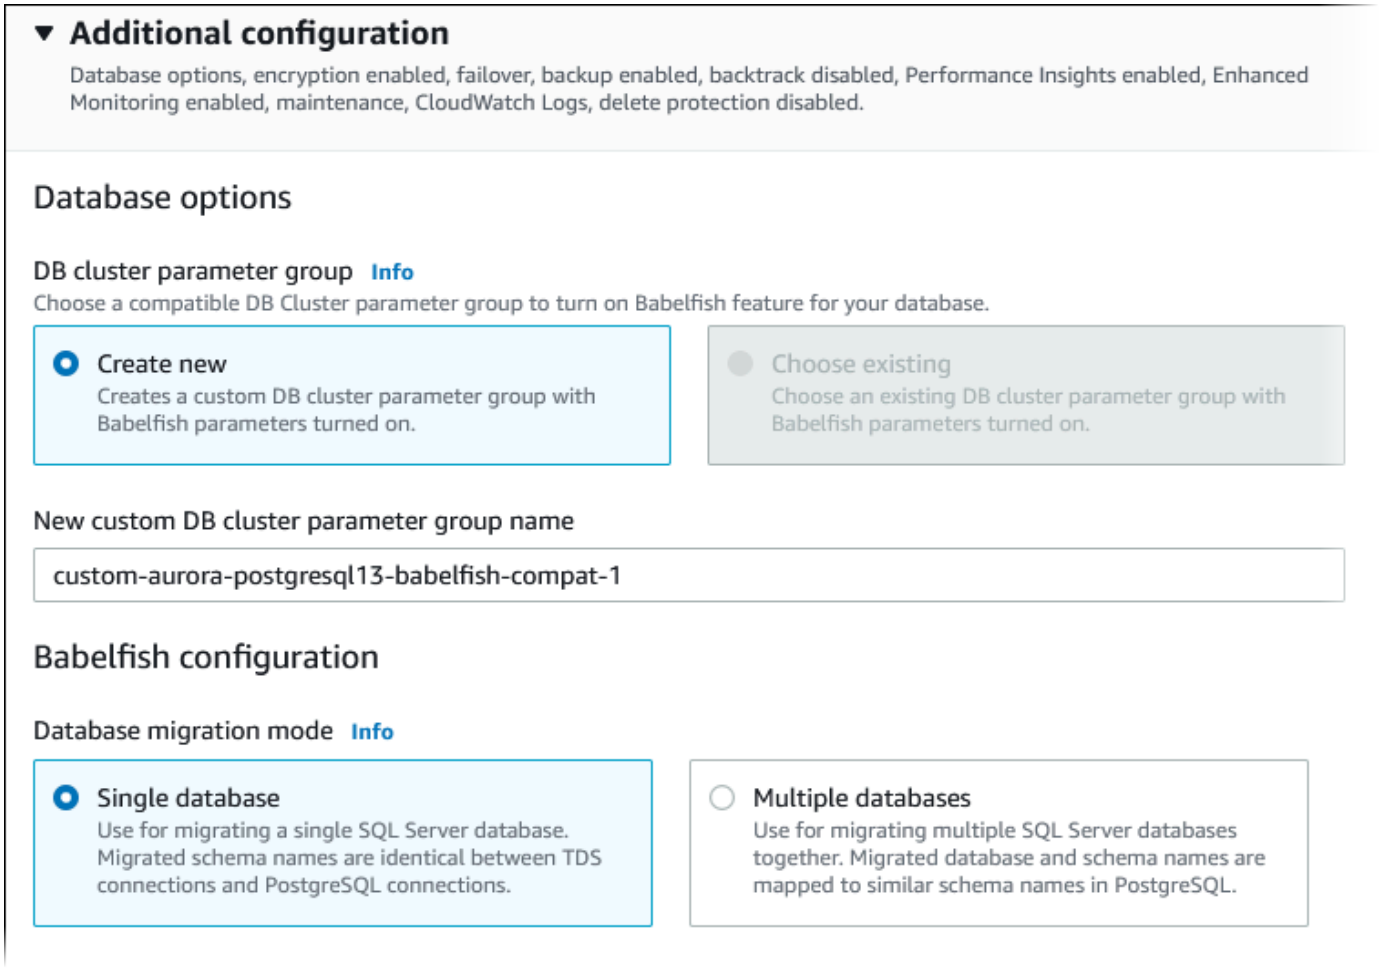

13. For **Default collation locale**, enter your server locale. The default is `en-US`. For detailed information about collations, see Understanding Collations in Babelfish for Aurora PostgreSQL.
14. For **Collation name** field, enter your default collation. The default is `sql_latin1_general_cp1_ci_as`. For detailed information, see Understanding Collations in Babelfish for Aurora PostgreSQL.
15. For **DB parameter group**, choose a parameter group or have Aurora create a new group for you with default settings.
16. For **Failover priority**, choose a failover priority for the instance. If you don't choose a value, the default is `tier-1`. This priority determines the order in which replicas are promoted when recovering from a primary instance failure. For more information, see Fault tolerance for an Aurora DB cluster.
17. For **Backup retention period**, choose the length of time (1–35 days) that Aurora retains backup copies of the database. You can use backup copies for point-in-time restores (PITR) of your database down to the second. The default retention period is seven days.

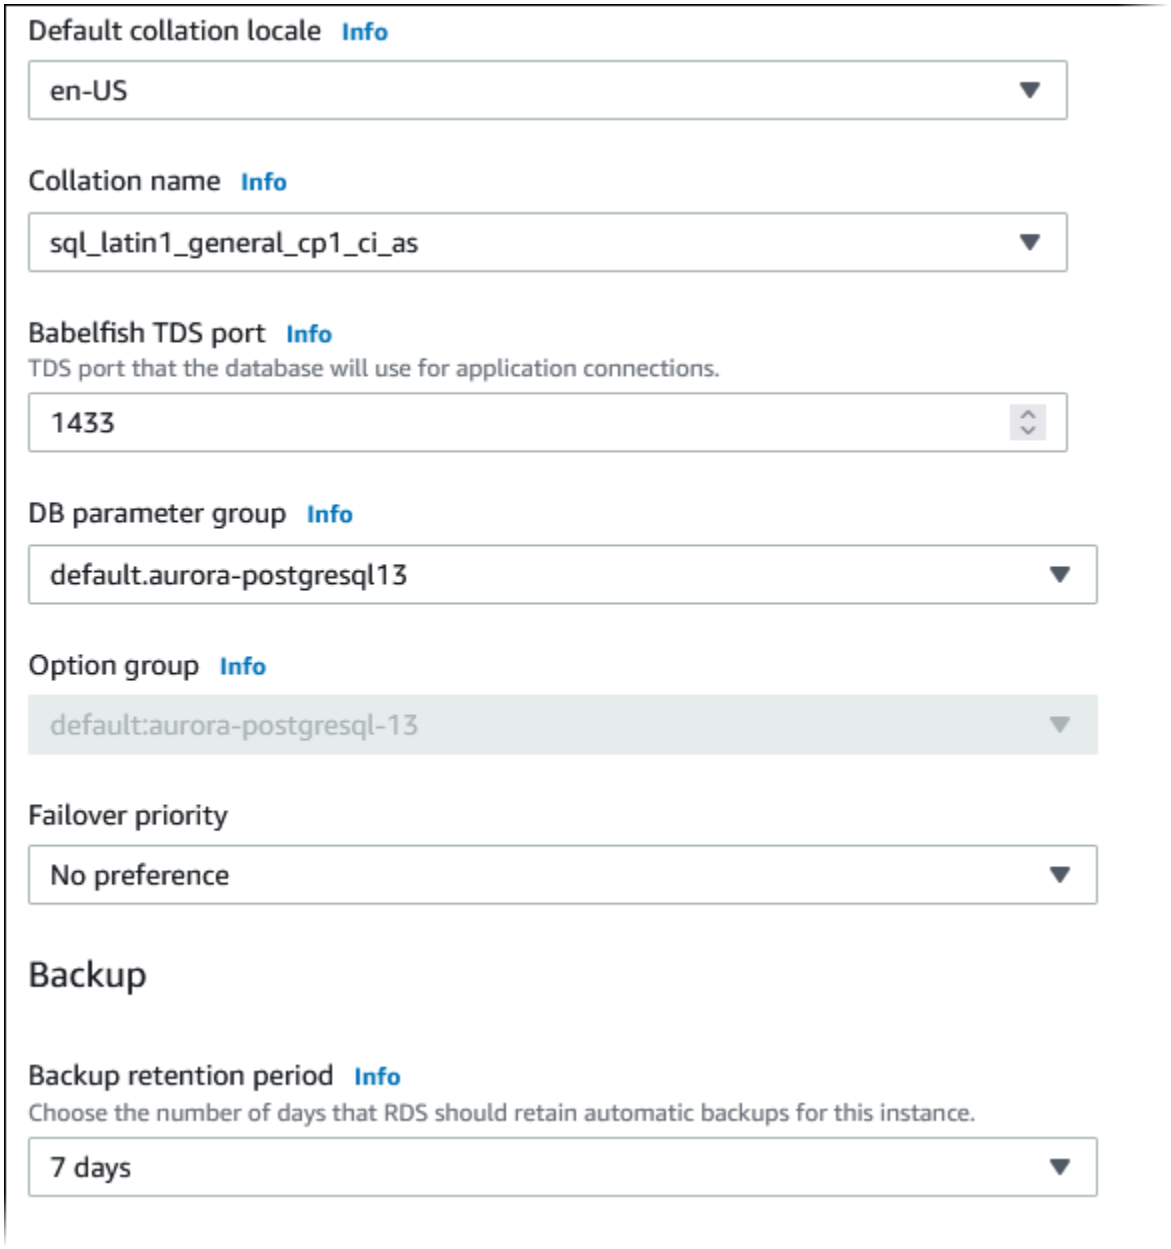


18. Choose **Copy tags to snapshots** to copy any DB instance tags to a DB snapshot when you create a snapshot.

> **Note**
>
> When restoring a DB cluster from a snapshot, it does not restore as a Babelfish for Aurora PostgreSQL DB cluster. You need to turn on the parameters that control Babelfish preferences in the DB cluster parameter group to enable Babelfish again. For more information on the Babelfish parameters, see DB cluster parameter group settings for Babelfish.

19. Choose **Enable encryption** to turn on encryption at rest (Aurora storage encryption) for this DB cluster.
20. Choose **Enable Performance Insights** to turn on Amazon RDS Performance Insights.
21. Choose **Enable Enhanced monitoring** to start gathering metrics in real time for the operating system that your DB cluster runs on.
22. Choose **PostgreSQL log** to publish the log files to Amazon CloudWatch Logs.
23. Choose **Enable auto minor version upgrade** to automatically update your Aurora DB cluster when a minor version upgrade is available.
24. For **Maintenance window**, do the following:


    - To choose a time for Amazon RDS to make modifications or perform maintenance, choose **Select window**.
    - To perform Amazon RDS maintenance at an unscheduled time, choose **No preference**.
25. Select the **Enable deletion protection** box to protect your database from being deleted by accident.

    If you turn on this feature, you can't directly delete the database. Instead, you need to modify the database cluster and turn off this feature before deleting the database.

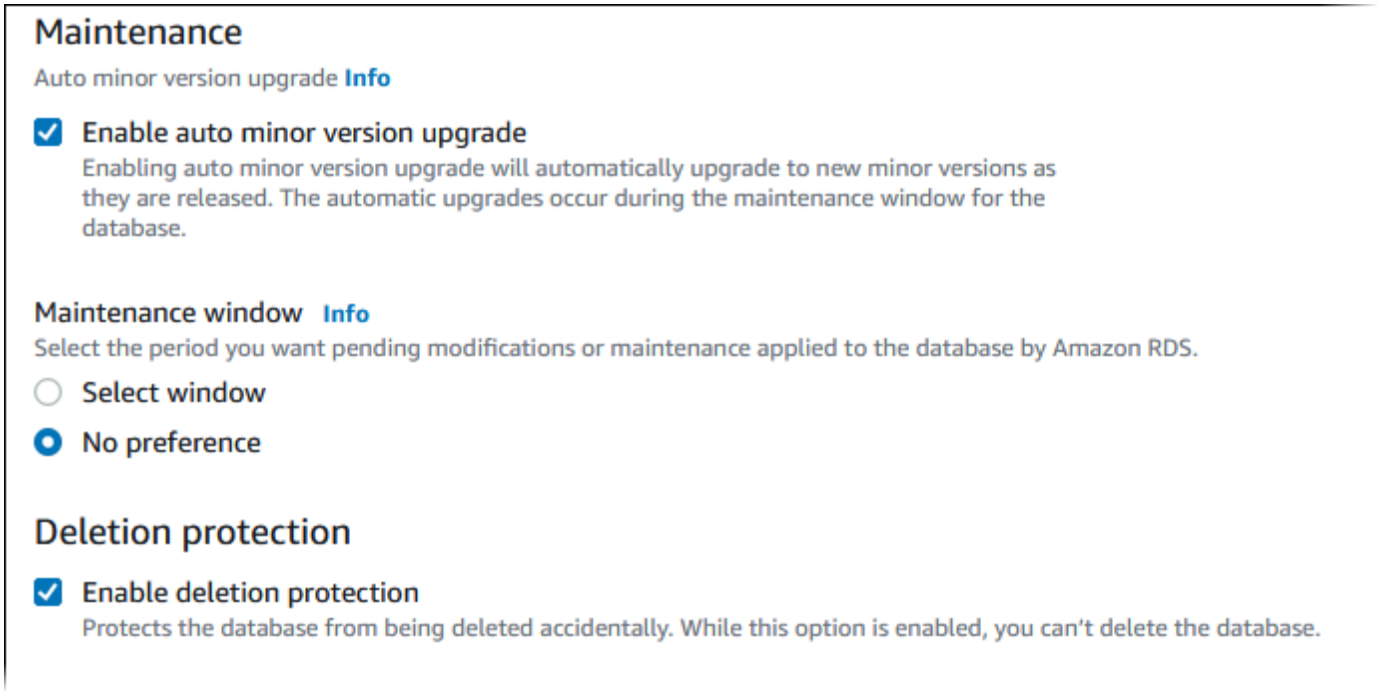

26. Choose **Create database**.

You can find your new database set up for Babelfish in the **Databases** listing. The **Status** column displays **Available** when the deployment is complete.

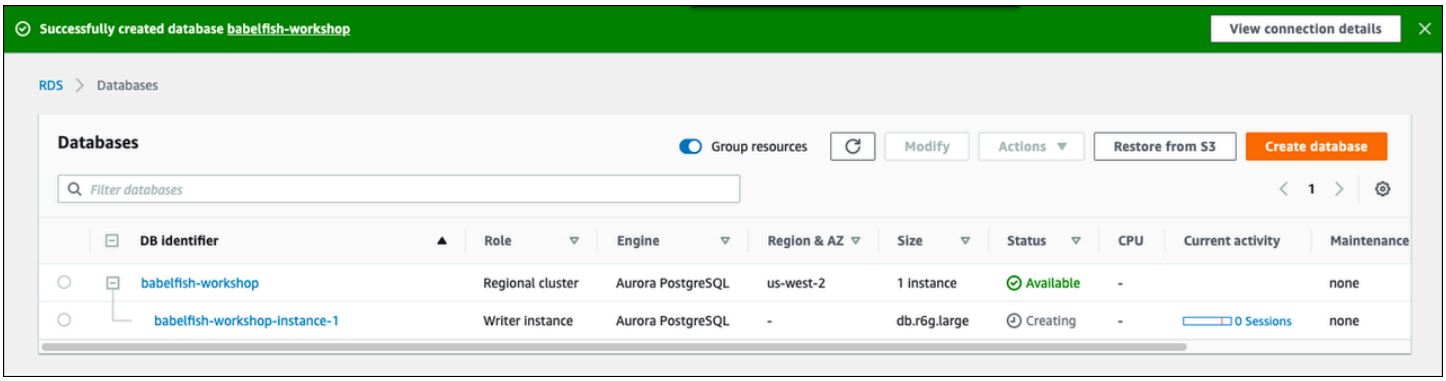

Amazon CLI

When you create an Babelfish for Aurora PostgreSQL; using the Amazon CLI, you need to pass the command the name of the DB cluster parameter group to use for the cluster. For more information, see DB cluster prerequisites.

Before you can use the Amazon CLI to create an Aurora PostgreSQL cluster with Babelfish, do the following:

- Choose your endpoint URL from the list of services at Amazon Aurora endpoints and quotas.
- Create a parameter group for the cluster. For more information about parameter groups, see Parameter groups for Amazon Aurora.
- Modify the parameter group, adding the parameter that turns on Babelfish.

To create an Aurora PostgreSQL DB cluster with Babelfish using the Amazon CLI

The examples that follow use the default Master username, `postgres`. Replace as needed with the username that you created for your DB cluster, such as `sa` or whatever username you chose if you didn't accept the default.

1. Create a parameter group.

   For Linux, macOS, or Unix:

```
aws rds create-db-cluster-parameter-group \
--endpoint-url endpoint-url \
--db-cluster-parameter-group-name parameter-group \
```

```
--db-parameter-group-family aurora-postgresql14 \
--description "description"
```

For Windows:

```
aws rds create-db-cluster-parameter-group ^
--endpoint-url endpoint-URL ^
--db-cluster-parameter-group-name parameter-group ^
--db-parameter-group-family aurora-postgresql14 ^
--description "description"
```

2. Modify your parameter group to turn on Babelfish.

   For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
--endpoint-url endpoint-url \
--db-cluster-parameter-group-name parameter-group \
--parameters
 "ParameterName=rds.babelfish_status,ParameterValue=on,ApplyMethod=pending-reboot"
```

   For Windows:

```
aws rds modify-db-cluster-parameter-group ^
--endpoint-url endpoint-url ^
--db-cluster-parameter-group-name paramater-group ^
--parameters
 "ParameterName=rds.babelfish_status,ParameterValue=on,ApplyMethod=pending-reboot"
```

3. Identify your DB subnet group and the virtual private cloud (VPC) security group ID for your new DB cluster, and then call the create-db-cluster command.

   For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
--db-cluster-identifier  cluster-name\
--master-username postgres \
--manage-master-user-password \
--engine aurora-postgresql \
--engine-version 14.3            \
--vpc-security-group-ids security-group \
--db-subnet-group-name subnet-group-name \
```

```
--db-cluster-parameter-group-name parameter-group
```

For Windows:

```
aws rds create-db-cluster ^
--db-cluster-identifier cluster-name ^
--master-username postgres ^
--manage-master-user-password ^
--engine aurora-postgresql ^
--engine-version 14.3 ^
--vpc-security-group-ids security-group ^
--db-subnet-group-name subnet-group ^
--db-cluster-parameter-group-name parameter-group
```

This example specifies the `--manage-master-user-password` option to generate the master user password and manage it in Secrets Manager. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager. Alternatively, you can use the `--master-password` option to specify and manage the password yourself.

4. Explicitly create the primary instance for your DB cluster. Use the name of the cluster that you created in step 3 for the `--db-cluster-identifier` argument when you call the create-db-instance command, as shown following.

   For Linux, macOS, or Unix:

   ```
   aws rds create-db-instance \
   --db-instance-identifier instance-name \
   --db-instance-class db.r6g \
   --db-subnet-group-name subnet-group \
   --db-cluster-identifier cluster-name \
   --engine aurora-postgresql
   ```

   For Windows:

   ```
   aws rds create-db-instance ^
   --db-instance-identifier instance-name ^
   --db-instance-class db.r6g ^
   --db-subnet-group-name subnet-group ^
   --db-cluster-identifier cluster-name ^
   --engine aurora-postgresql
   ```

Migrating a SQL Server database to Babelfish for Aurora PostgreSQL

You can use Babelfish for Aurora PostgreSQL to migrate an SQL Server database to an Amazon Aurora PostgreSQL DB cluster. Before migrating, review Using Babelfish with a single database or multiple databases.

Topics

- Overview of the migration process
- Evaluating and handling differences between SQL Server and Babelfish
- Import/export tools for migrating from SQL Server to Babelfish

Overview of the migration process

The following summary lists the steps required to successfully migrate your SQL Server application and make it work with Babelfish. For information about the tools you can use for the export and import processes and for more detail, see Import/export tools for migrating from SQL Server to Babelfish. To load the data, we recommend using Amazon DMS with an Aurora PostgreSQL DB cluster as the target endpoint.

1. Create a new Aurora PostgreSQL DB cluster with Babelfish turned on. To learn how, see Creating a Babelfish for Aurora PostgreSQL DB cluster.

   To import the various SQL artifacts exported from your SQL Server database, connect to the Babelfish cluster using a SQL Server tool such as sqlcmd. For more information, see Using a SQL Server client to connect to your DB cluster.
2. On the SQL Server database that you want to migrate, export the data definition language (DDL). The DDL is SQL code that describes database objects that contain user data (such as tables, indexes, and views) and user-written database code (such as stored procedures, user-defined functions, and triggers).

   For more information, see Using SQL Server Management Studio (SSMS) to migrate to Babelfish.
3. Run an assessment tool to evaluate the scope of any changes that you might need to make so that Babelfish can effectively support the application running on SQL Server. For more information, see Evaluating and handling differences between SQL Server and Babelfish.
4. Review the Amazon DMS target endpoint limitations and update the DDL script as necessary. For more information, see Limitations to using a PostgreSQL target endpoint with Babelfish tables in Using Babelfish for Aurora PostgreSQL as a target.

5. On your new Babelfish DB cluster, run the DDL within your specified T-SQL database to create only the schemas, user-defined data types, and tables with their primary key constraints.
6. Use Amazon DMS to migrate your data from SQL Server to Babelfish tables. For continuous replication using SQL Server Change Data Capture or SQL Replication, use Aurora PostgreSQL instead of Babelfish as the endpoint. To do so, see the Using Babelfish for Aurora PostgreSQL as a target for Amazon Database Migration Service.
7. When the data load completes, create all the remaining T-SQL objects that support the application on your Babelfish cluster.
8. Reconfigure your client application to connect to the Babelfish endpoint instead of your SQL Server database. For more information, see Connecting to a Babelfish DB cluster.
9. Modify your application as needed and retest. For more information, see Differences between Babelfish for Aurora PostgreSQL and SQL Server.

You still need to assess your client-side SQL queries. The schemas generated from your SQL Server instance convert only the server-side SQL code. We recommend that you take the following steps:

- Capture client-side queries by using the SQL Server Profiler with the TSQL_Replay predefined template. This template captures T-SQL statement information that you can then replay for iterative tuning and testing. You can start the profiler within SQL Server Management Studio from the **Tools** menu. Choose **SQL Server Profiler** to open the profiler and choose the TSQL_Replay template.

  To use for your Babelfish migration, start a trace and then run your application using your functional tests. The profiler captures the T-SQL statements. When you finish testing, stop the trace. Save the result to an XML file with your client-side queries (File > Save as > Trace XML File for Replay).

  For more information, see SQL Server Profiler in the Microsoft documentation. For more information about the TSQL_Replay template, see SQL Server Profiler Templates.
- For applications with complex client-side SQL queries, we recommend that you use Babelfish Compass to analyze these queries for Babelfish compatibility. If the analysis indicates that the client-side SQL statements contain unsupported SQL features, review the SQL aspects in the client application and modify as needed.
- You can also capture the SQL queries as extended events (.xel format). To do so, use the SSMS XEvent Profiler. After generating the .xel file, extract the SQL statements into .xml files that

Compass can then process. For more information, see Use the SSMS XEvent Profler in the Microsoft documentation.

When you're satisfied with all testing, analysis, and any modifications needed for your migrated application, you can start using your Babelfish database for production. To do so, stop the original database and redirect live client applications to use the Babelfish TDS port.

> **Note**
>
> Amazon DMS now supports replicating data from Babelfish. For more information, see Amazon DMS now supports Babelfish for Aurora PostgreSQL as a source.

Evaluating and handling differences between SQL Server and Babelfish


For best results, we recommend that you evaluate the generated DDL/DML and the client query code before actually migrating your SQL Server database application to Babelfish. Depending on the version of Babelfish and the specific features of SQL Server that your application implements, you might need to refactor your application or use alternatives for functionality that aren't fully supported yet in Babelfish.

- To assess your SQL Server application code, use Babelfish Compass on the generated DDL to determine how much T-SQL code is supported by Babelfish. Identify T-SQL code that might need modifications before running on Babelfish. For more information about this tool, see Babelfish Compass tool on GitHub.


  > **Note**
  >
  > Babelfish Compass is an open-source tool. Report any issues with Babelfish Compass through GitHub instead of through Amazon Support.

You can use Generate Script Wizard with SQL Server Management Studio (SSMS) to generate the SQL file that is assessed by Babelfish Compass. We recommend the following steps to streamline the assessment.


1. On the **Choose Objects** page, choose **Script entire database and all database objects**.

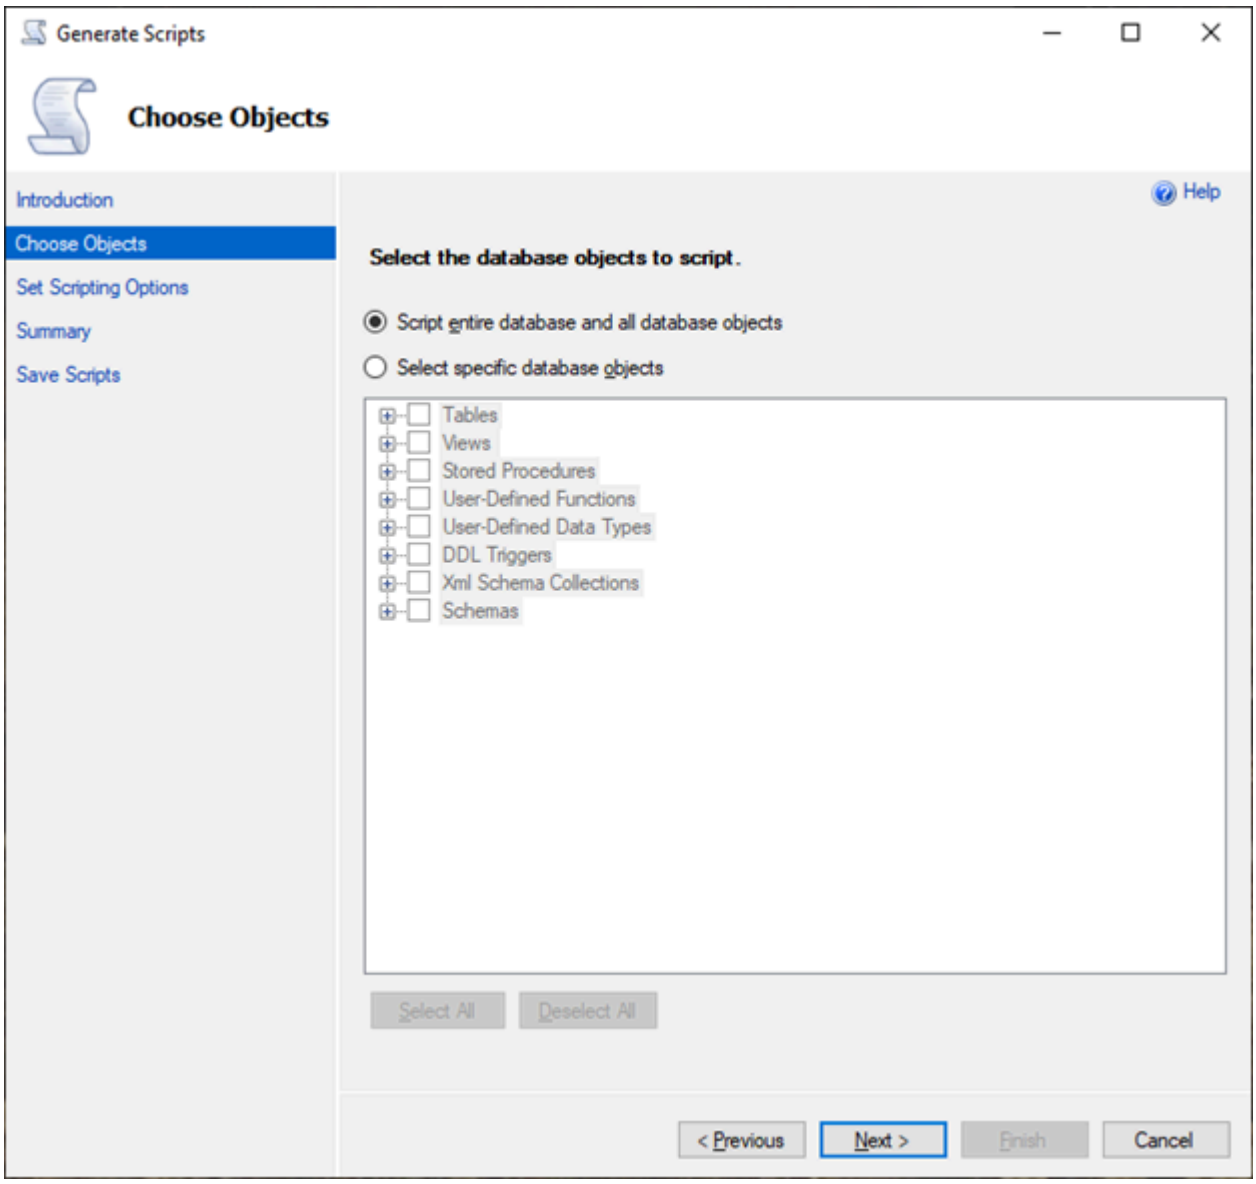

2. For the **Set Scripting Options**, choose **Save as script file** as a **Single script file**.

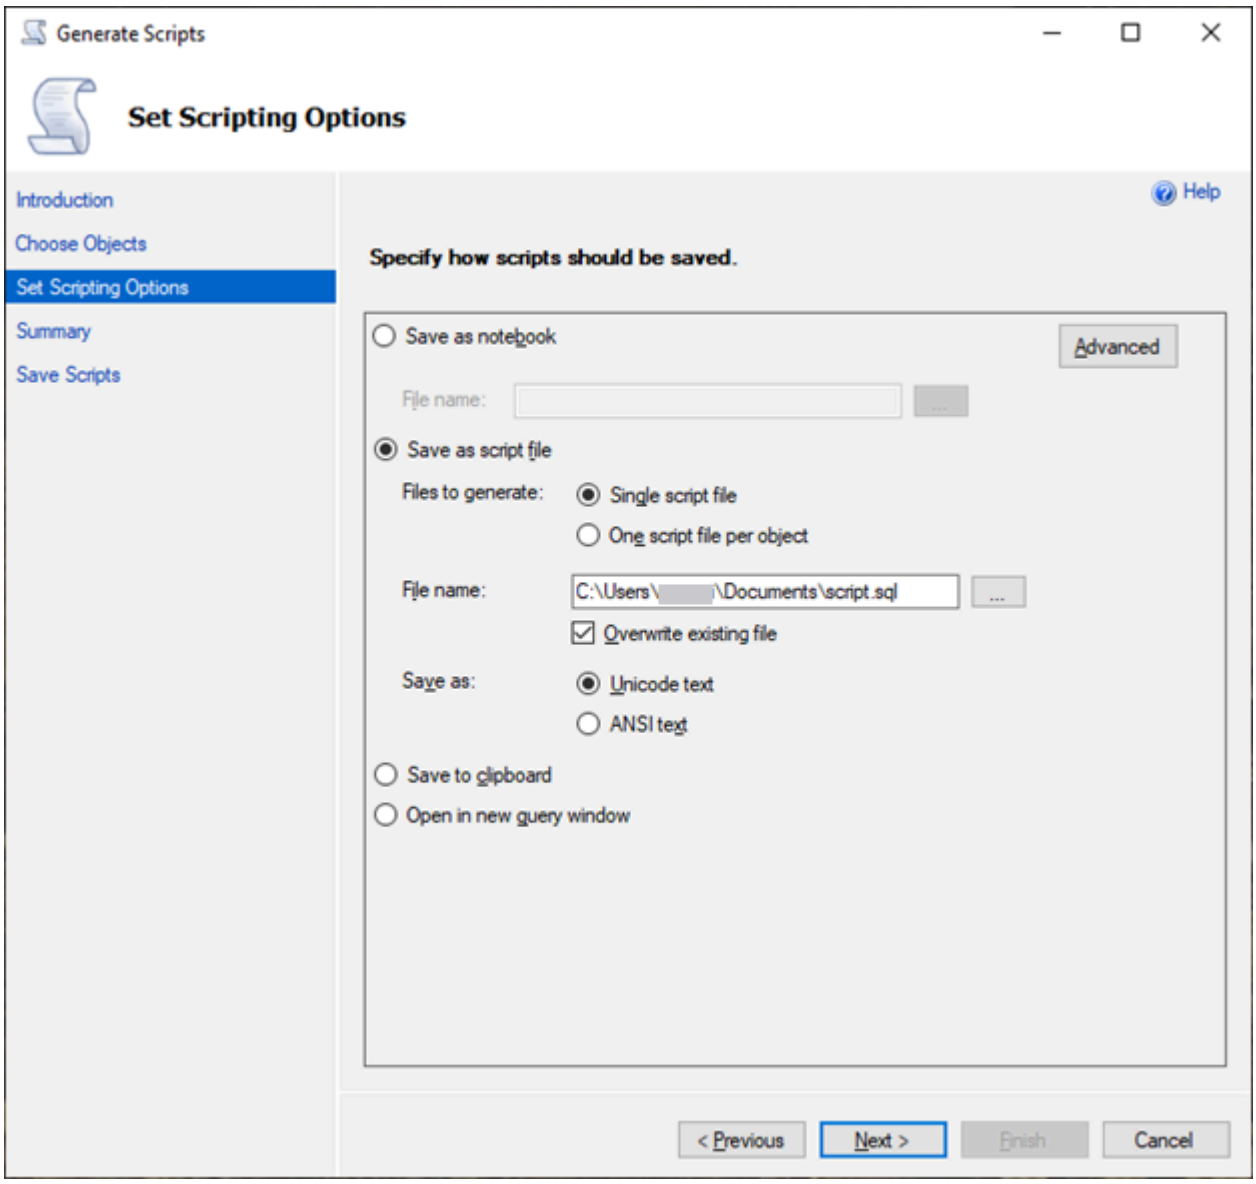

3. Choose **Advanced** to change the default scripting options to identify features that normally are set to false for a full assessment:
   - Script Change Tracking to True
   - Script Full-Text Indexes to True
   - Script Triggers to True
   - Script Logins to True
   - Script Owner to True
   - Script Object-Level Permissions to True
   - Script Collations to True

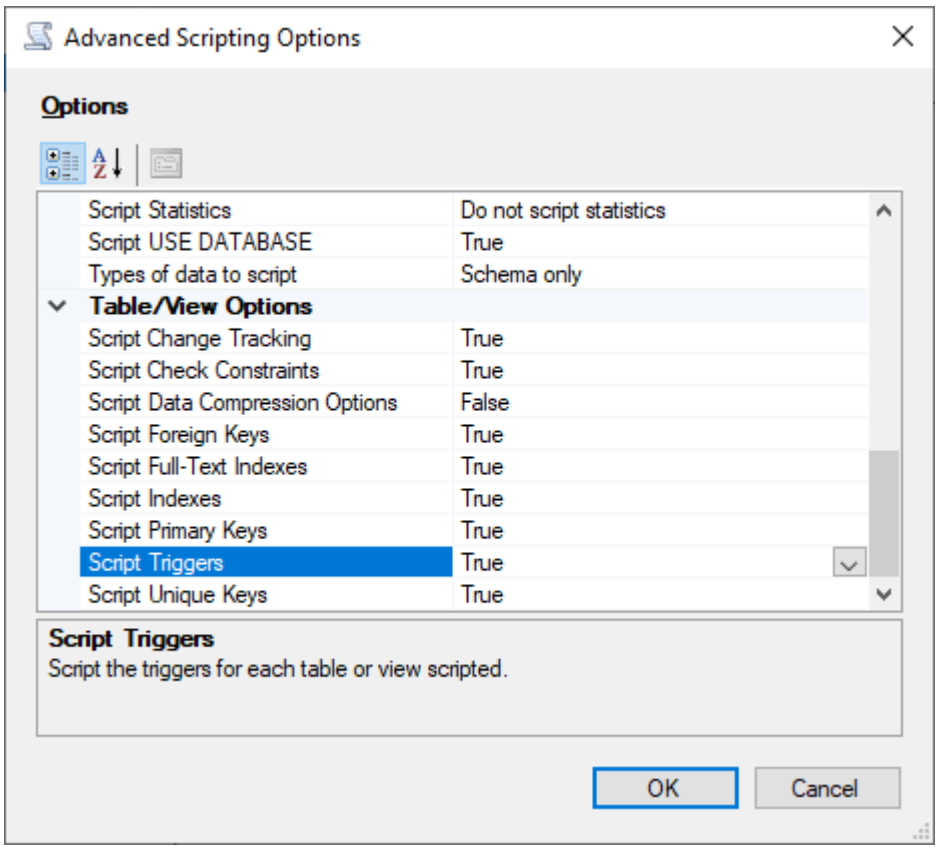

4. Perform the remaining steps in the wizard to generate the file.

Import/export tools for migrating from SQL Server to Babelfish

We recommend that you use Amazon DMS as the primary tool for migrating from SQL Server to Babelfish. However, Babelfish supports several other ways to migrate data using SQL Server tools that includes the following.

- SQL Server Integration Services (SSIS) for all versions of Babelfish. For more information, see Migrate from SQL Server to Aurora PostgreSQL using SSIS and Babelfish.
- Use the SSMS Import/Export Wizard for Babelfish versions 2.1.0 and later. This tool is available through the SSMS, but it's also available as a standalone tool. For more information, see Welcome to SQL Server Import and Export Wizard in the Microsoft documentation.
- The Microsoft bulk data copy program (bcp) utility lets you copy data from a Microsoft SQL Server instance to a data file in the format you specify. For more information, see bcp Utility in the Microsoft documentation. Babelfish now supports the data migration using the BCP client and the bcp utility now supports `-E` flag (for identity columns) and -b flag (for batching inserts). Certain bcp options aren't supported, including `-C`, `-T`, `-G`, `-K`, `-R`, `-V`, and `-h`.

Using SQL Server Management Studio (SSMS) to migrate to Babelfish

We recommend generating separate files for each of the specific object types. You can use the Generate Scripts wizard in SSMS for each set of DDL statements first, and then modify the objects as a group to fix any issues found during the assessment.

Perform these steps to migrate the data using Amazon DMS or other data migration methods. Run these create script types first for a better and faster approach to load the data on the Babelfish tables in Aurora PostgreSQL.

1. Run `CREATE SCHEMA` statements.
2. Run `CREATE TYPE` statements to create user-defined data types.
3. Run basic `CREATE TABLE` statements with the primary keys or unique constraints.


Perform the data load using the recommended import/export tool. Run the modified scripts for the following steps to add the remaining database objects. You need the create table statements to run these scripts for the constraints, triggers, and indexes. After the scripts generate, delete the create table statements.

1. Run `ALTER TABLE` statements for the check constraints, foreign key constraints, default constraints.
2. Run `CREATE TRIGGER` statements.
3. Run `CREATE INDEX` statements.
4. Run `CREATE VIEW` statements.
5. Run `CREATE STORED PROCEDURE` statements.

To generate scripts for each object type


Use the following steps to create the basic create table statements using the Generate Scripts wizard in SSMS. Follow the same steps to generate scripts for the different object types.

1. Connect to your existing SQL Server instance.
2. Open the context (right-click) menu for a database name.
3. Choose **Tasks**, and then choose **Generate Scripts...**.
4. On the **Choose Objects** pane, choose **Select specific database objects**. Choose **Tables**, select all tables. Choose **Next** to continue.

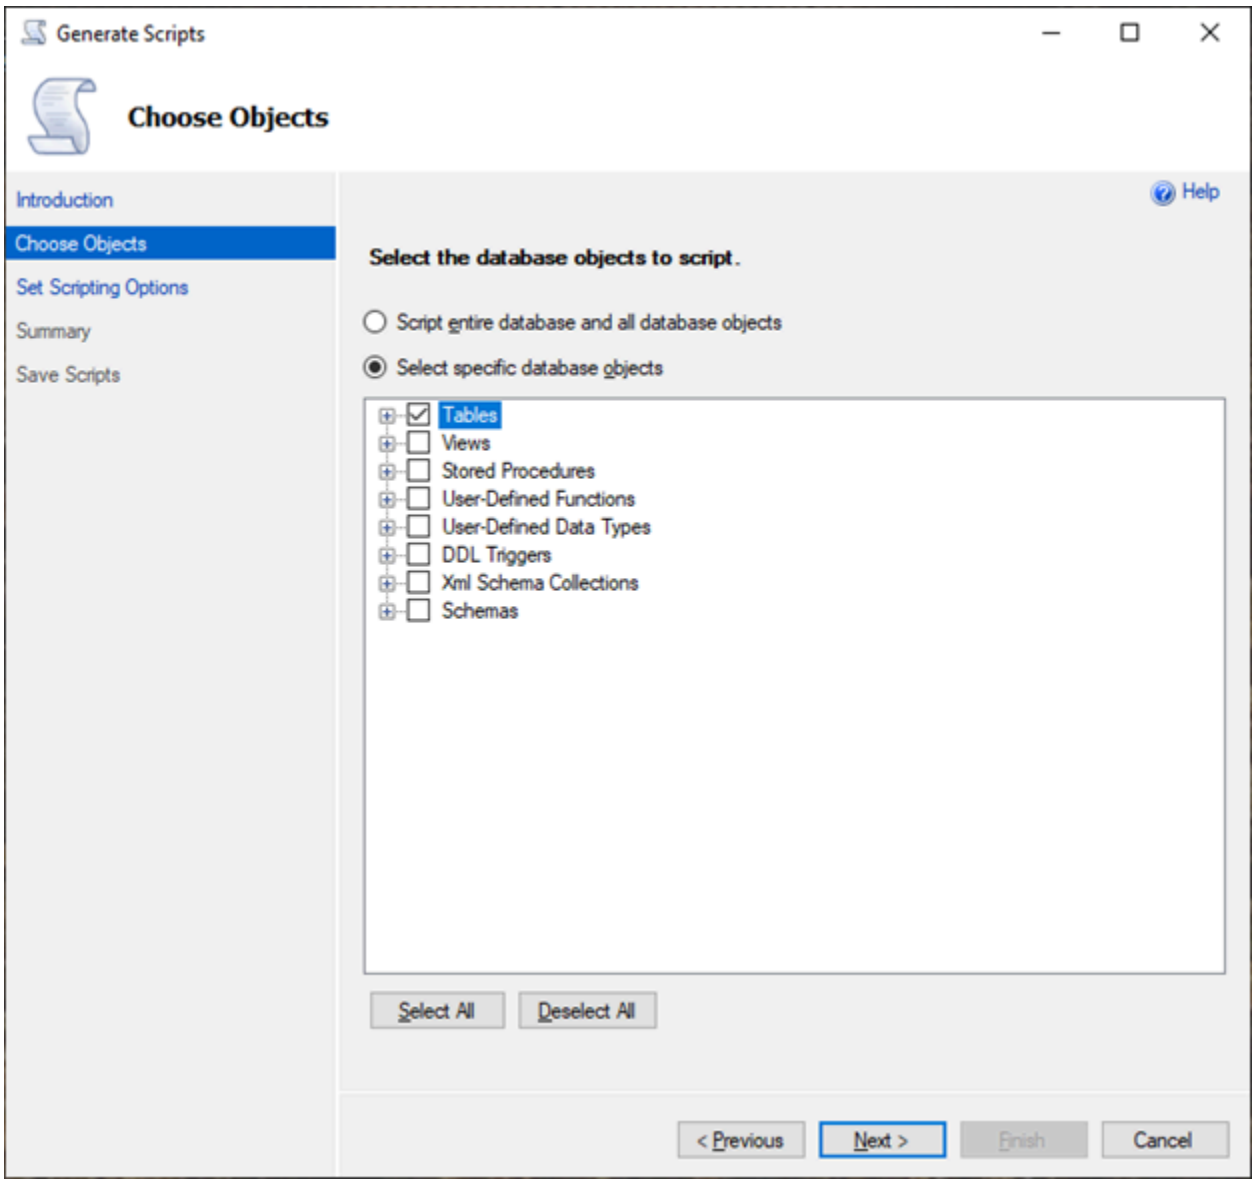


5. On the **Set Scripting Options** page, choose **Advanced** to open the **Options** settings. To generate the basic create table statements, change the following default values:

   - Script Defaults to False.
   - Script Extended Properties to False. Babelfish does not support extended properties.
   - Script Check Constraints to False. Script Foreign Keys to False.

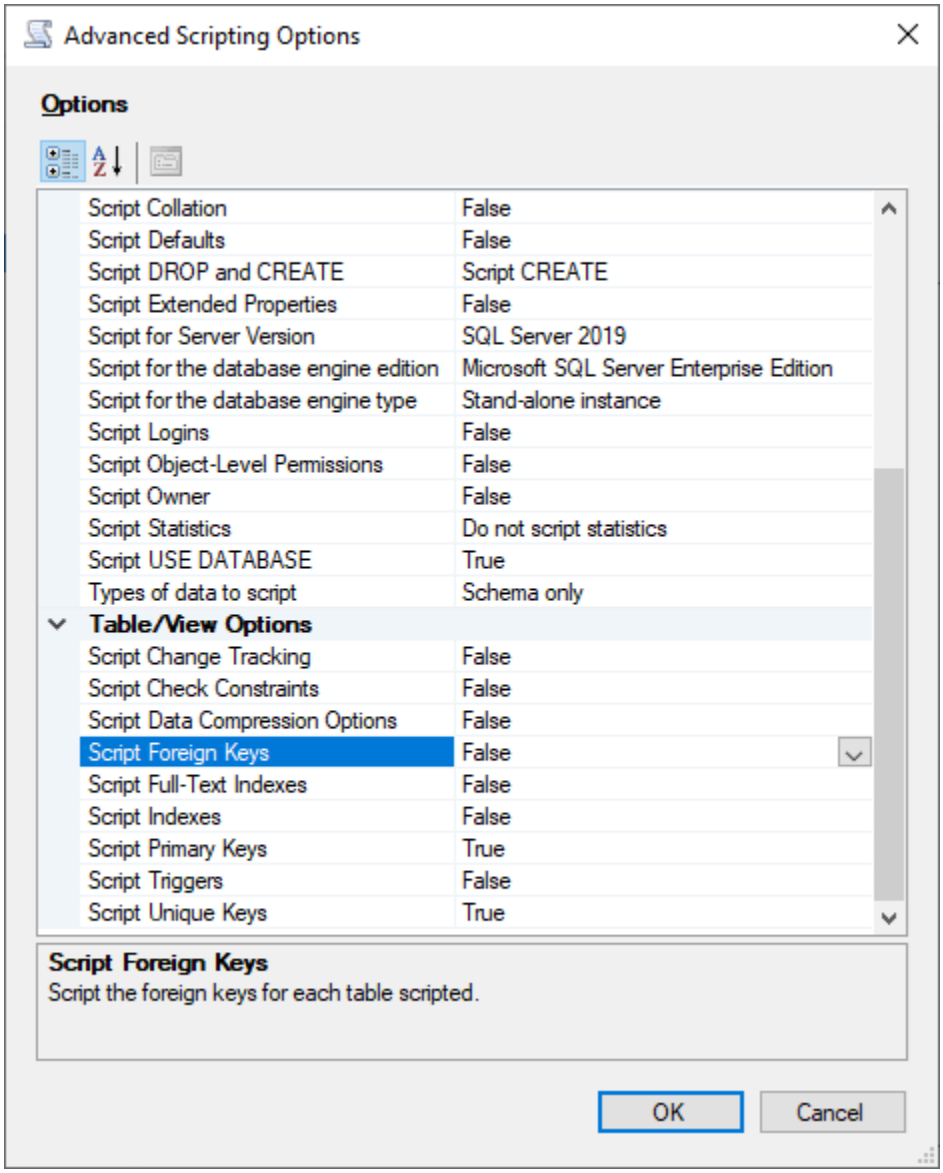

6. Choose **OK**.
7. On the **Set Scripting Options** page, choose **Save as script file** and then choose the **Single script file** option. Enter your **File name**.

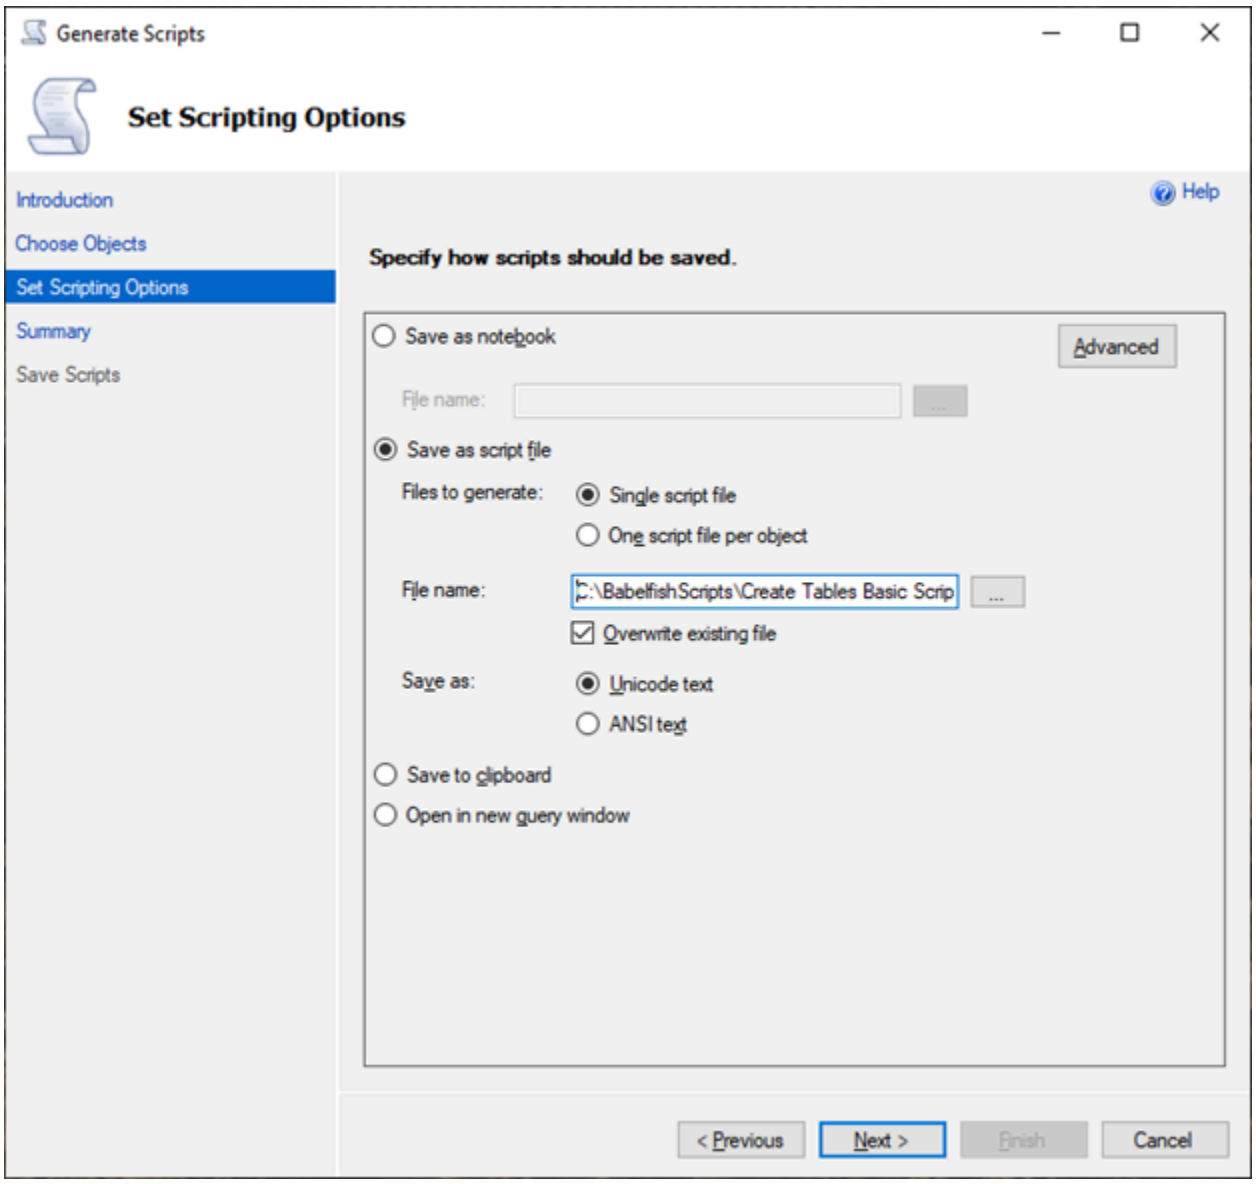

8. Choose **Next** to view the **Summary wizard** page.
9. Choose **Next** to start the script generation.

   You can continue to generate scripts for the other object types in the wizard. Instead of choosing **Finish** after the file is saved, choose the **Previous** button three times to go back to the **Choose Objects** page. Then repeat the steps in the wizard to generate scripts for the other object types.

Database authentication with Babelfish for Aurora PostgreSQL

Babelfish for Aurora PostgreSQL supports two ways to authenticate database users. Password authentication is available by default for all Babelfish DB clusters. You can also add Kerberos authentication for the same DB cluster.

Topics

- Password authentication with Babelfish
- Kerberos authentication with Babelfish
- Setting up Kerberos authentication using Active Directory security groups for Babelfish

Password authentication with Babelfish

Babelfish for Aurora PostgreSQL supports password authentication. Passwords are stored in encrypted form on disk. For more information about authentication on an Aurora PostgreSQL cluster, see Security with Amazon Aurora PostgreSQL.

You might be prompted for credentials each time you connect to Babelfish. Any user migrated to or created on Aurora PostgreSQL can use the same credentials on both the SQL Server port and the PostgreSQL port. Babelfish doesn't enforce password policies, but we recommend that you do the following:

- Require a complex password that's at least eight (8) characters long.
- Enforce a password expiration policy.

To review a complete list of database users, use the command `SELECT * FROM pg_user;`.

Kerberos authentication with Babelfish

Babelfish for Aurora PostgreSQL 15.2 version supports authentication to your DB cluster using Kerberos. This method allows you to use Microsoft Windows Authentication to authenticate users when they connect to your Babelfish database. To do so, you must first configure your DB cluster to use Amazon Directory Service for Microsoft Active Directory for Kerberos authentication. For more information, see What is Amazon Directory Service? in the *Amazon Directory Service Administration Guide*.

Setting up Kerberos Authentication

Babelfish for Aurora PostgreSQL DB cluster can connect using two different ports, but Kerberos authentication setup is a one-time process. Therefore, you must first set up Kerberos authentication for your DB cluster. For more information, see Setting up Kerberos authentication. After completing the setup, ensure that you can connect with a PostgreSQL client using Kerberos. For more information, see Connecting with Kerberos Authentication.

Login and user provisioning in Babelfish

Windows logins created from the Tabular Data Stream (TDS) port can be used either with the TDS port or the PostgreSQL port. First, the login that can use Kerberos for authentication must be provisioned from the TDS port before it is used by the T-SQL users and applications to connect to a Babelfish database. When creating Windows logins, administrators can provide the login using either the DNS domain name or the NetBIOS domain name. Typically, NetBIOS domain is the subdomain of the DNS domain name. For example, if the DNS domain name is `CORP.EXAMPLE.COM`, then the NetBIOS domain can be `CORP`. If the NetBIOS domain name format is provided for a login, a mapping must exist to the DNS domain name.

Managing NetBIOS domain name to DNS domain name mapping

To manage mappings between the NetBIOS domain name and DNS domain name, Babelfish provides system stored procedures to add, remove, and truncate mappings. Only a user with a `sysadmin` role can run these procedures.

To create mapping between NetBIOS and DNS domain name, use the Babelfish provided system stored procedure `babelfish_add_domain_mapping_entry`. Both arguments must have a valid value and are not NULL.

Example

```
EXEC babelfish_add_domain_mapping_entry 'netbios_domain_name',
 'fully_qualified_domain_name'
```

The following example shows how to create the mapping between the NetBIOS name CORP and DNS domain name CORP.EXAMPLE.COM.

Example

```
EXEC babelfish_add_domain_mapping_entry 'corp', 'corp.example.com'
```

To delete an existing mapping entry, use the system stored procedure babelfish_remove_domain_mapping_entry.

Example

```
EXEC babelfish_remove_domain_mapping_entry 'netbios_domain_name'
```

The following example shows how to remove the mapping for the NetBIOS name CORP.

Example

```
EXEC babelfish_remove_domain_mapping_entry 'corp'
```

To remove all existing mapping entries, use the system stored procedure babelfish_truncate_domain_mapping_table:

Example

```
EXEC babelfish_truncate_domain_mapping_table
```

To view all mappings between NetBIOS and DNS domain name, use the following query.

Example

```
SELECT netbios_domain_name, fq_domain_name FROM babelfish_domain_mapping;
```

Managing Logins

Create logins

Connect to the DB through the TDS endpoint using a login that has the correct permissions. If there is no database user created for the login, then the login is mapped to guest user. If the guest user is not enabled, then the login attempt fails.

Create a Windows login using the following query. The `FROM WINDOWS` option allows authentication using Active Directory.

```
CREATE LOGIN login_name FROM WINDOWS [WITH DEFAULT_DATABASE=database]
```

Example

The following example shows creating a login for the Active Directory user [corp\test1] with a default database of db1.

```
CREATE LOGIN [corp\test1] FROM WINDOWS WITH DEFAULT_DATABASE=db1
```

This example assumes that there is a mapping between the NetBIOS domain CORP and the DNS domain name CORP.EXAMPLE.COM. If there is no mapping, then you must provide the DNS domain name [CORP.EXAMPLE.COM\test1].

> **Note**
>
> Logins based on Active Directory users, are limited to names of fewer than 21 characters.

Drop login

To drop a login, use the same syntax as for any login, as shown in the following example:

```
DROP LOGIN [DNS domain name\login]
```

Alter login

To alter a login, use the same syntax as for any login, as in the following example:

```
ALTER LOGIN [DNS domain name\login] { ENABLE|DISABLE|WITH DEFAULT_DATABASE=[master] }
```

The ALTER LOGIN command supports limited options for Windows logins, including the following:

- DISABLE – To disable a login. You can't use a disabled login for authentication.
- ENABLE – To enable a disabled login.
- DEFAULT_DATABASE – To change the default database of a login.

> **Note**
>
> All password management is performed through Amazon Directory Service, so the ALTER LOGIN command doesn't allow database administrators to change or set passwords for Windows logins.

Connecting to Babelfish for Aurora PostgreSQL with Kerberos authentication

Typically, the database users who authenticate using Kerberos are doing so from their client machines. These machines are members of the Active Directory domain. They use Windows Authentication from their client applications to access the Babelfish for Aurora PostgreSQL server on the TDS port.

Connecting to Babelfish for Aurora PostgreSQL on the PostgreSQL port with Kerberos authentication

You can use logins created from the TDS port with either the TDS port or the PostgreSQL port. However, PostgreSQL uses case-sensitive comparisons by default for usernames. For Aurora PostgreSQL to interpret Kerberos usernames as case-insensitive, you must set the `krb_caseins_users` parameter as `true` in the custom Babelfish cluster parameter group. This parameter is set to `false` by default. For more information, see Configuring for case-insensitive user names. In addition, you must specify the login username in the format <login@DNS domain name> from the PostgreSQL client applications. You can't use <DNS domain name\login> format.

Frequently occurring errors

You can configure forest trust relationships between your on-premises Microsoft Active Directory and the Amazon Managed Microsoft AD. For more information, see Create a trust relationship.

Then, you must connect using a specialized domain specific endpoint instead of using the Amazon domain `rds.amazonaws.com` in the host endpoint. If you don't use the correct domain specific endpoint, you might encounter the following error:

```
Error: “Authentication method "NTLMSSP" not supported (Microsoft SQL Server, Error:
 514)"
```

This error occurs when the TDS client can't cache the service ticket for the supplied endpoint URL. For more information, see Connecting with Kerberos.

Setting up Kerberos authentication using Active Directory security groups for Babelfish

Starting from Babelfish version 4.2.0, you can setup Kerberos authentication for Babelfish with Active Directory security groups. The following are prerequisites to complete for setting up Kerberos authentication using Active Directory:

- You must follow all the steps mentioned at Kerberos authentication with Babelfish.
- Ensure that DB instance is associated with Active Directory. To verify this, you can view the status of the domain membership in the console or by running the describe-db-instances Amazon CLI command.

  The status of the DB instance should be kerberos-enabled. For more information on understanding domain membership, see Understanding Domain membership.
- Verify mappings between NetBIOS domain name and DNS domain name using the following query:

  ```
  SELECT netbios_domain_name, fq_domain_name FROM babelfish_domain_mapping;
  ```
- Before proceeding further, verify Kerberos authentication using individual login works as expected. The connection using Kerberos authentication as an Active Directory user should be successful. If you face any issues, see Frequently occurring errors.

Setting up the pg_ad_mapping extension

You must follow all the steps mentioned at Setting up the pg_ad_mapping extension . To verify that the extension is installed, run the following query from TDS endpoint:

```
1> SELECT extname, extversion FROM pg_extension where extname like 'pg_ad_mapping';
2> GO
extname       extversion
------------- ----------
pg_ad_mapping 0.1

(1 rows affected)
```

Managing Group Logins

Create group logins by following the steps mentioned at Managing Logins. We recommend that the login name be the same as the Active Directory (AD) security group name for easier maintenance, although it's not mandatory. For example:

```
CREATE LOGIN [corp\accounts-group] FROM WINDOWS [WITH DEFAULT_DATABASE=database]
```

Mapping T-SQL group logins with AD security group

You need to explicitly provision T-SQL Windows Group Login for each AD security group that requires access to the database server. An AD user, who is part of at least one provisioned AD security group, will get access to the database server.

> **Note**
>
> This T-SQL login can no longer authenticate using a password based authentication.

For example, accounts-group is a security group in AD and if you would like to provision this security group in Babelfish, you must use the format [corp\accounts-group].

- AD Security Group : accounts-group
- TSQL Login : [corp\accounts-group]
- Equivalent PG role for given TSQL Login : accounts-group@CORP.EXAMPLE.COM

Admin can now proceed to create the mapping between AD security group and T-SQL login from PostgreSQL endpoint via following psql command. For more information on the function usage, see Using functions from the `pg_ad_mapping` extension.

> **Note**
>
> T-SQL login should be specified in login_name@FQDN format while adding the mapping. Weights are ignored when connecting through TDS endpoint. For more information about usage of weights, see Connecting to Babelfish via PostgreSQL endpoint on the PostgreSQL port.

```
postgres=>select pgadmap_set_mapping('accounts-group', 'accounts-
group@CORP.EXAMPLE.COM', <SID>, <Weight>);
```

For information on retrieving SID of AD security group, see Retrieving Active Directory Group SID in PowerShell.

The following table shows a sample mapping from AD security groups to T-SQL logins:

AD Security Groups	TSQL Logins	Equivalent PG role for given TSQL Login	Weight
accounts-group	[corp\accounts-group]	accounts-group@CORP.EXAMPLE.COM	7
sales-group	[corp\sales-group]	sales-group@CORP.EXAMPLE.COM	10
dev-group	[corp\dev-group]	dev-group@CORP.EXAMPLE.COM	7

```
postgres=> select admap.ad_sid, admap.ad_grp, lgn.orig_loginname, lgn.rolname,
 admap.weight from pgadmap_read_mapping() as admap, sys.babelfish_authid_login_ext as
 lgn where admap.pg_role = lgn.rolname;
    ad_sid    |     ad_grp     |    orig_loginname   |            rolname
 | weight
--------------+----------------+---------------------+-------------------------------
+--------
```

```
 S-1-5-67-890 | accounts-group | corp\accounts-group  | accounts-group@CORP.EXAMPLE.COM
 |     7
 S-1-2-34-560 | sales-group    | corp\sales-group     | sales-group@CORP.EXAMPLE.COM
 |     10
 S-1-8-43-612 | dev-group      | corp\dev-group       | dev-group@CORP.EXAMPLE.COM
 |     7
 (7 rows)
```

Connecting to Babelfish via TDS endpoint

In the following example, user1 is member of accounts-group and sales-group, user2 is member of accounts-group and dev-group.

Username	AD Security Groups membership
user1	accounts-group, sales-group
user2	accounts-group, dev-group

Connect to Babelfish database server using sqlcmd utility. You can verify if an user (user1 in this example) was authenticated using Kerberos by following the example below:

```
1> select principal, gss_authenticated from pg_stat_gssapi where pid =
 pg_backend_pid();
2>  GO
principal               gss_authenticated
----------------------  -----------------
user1@CORP.EXAMPLE.COM  1

((1 rows affected))
1> select suser_name();
2>  GO
suser_name
----------
corp\user1

(1 rows affected)
```

In this example, user1 will inherit the privileges of accounts-group and sales-group. You can verify the group membership using `sys.login_token` system view.

```
1> SELECT name, type FROM sys.login_token;
2>  GO
name                type
------------------- ----
corp\accounts-group WINDOWS GROUP
corp\sales-group    WINDOWS GROUP

(2 rows affected)
```

Auditing and Logging

To determine the AD security principal identity, use the following commands:

```
1> select suser_name();
2> GO
suser_name
----------
corp\user1

(1 rows affected)
```

Currently, AD user identity isn't visible in the logs. You can turn on the `log_connections` parameter to log DB session establishment. For more information, see Turning on query logging for your Aurora PostgreSQL DB cluster . The output includes the AD user identity as principal as shown in the following example. The backend PID associated with this output can then help attribute actions back to the actual AD user.

```
bbf_group_ad_login@babelfish_db:[615]:LOG: connection authorized:
 user=bbf_group_ad_login database=babelfish_db application_name=sqlcmd GSS
 (authenticated=yes, encrypted=yes, principal=user1@CORP.EXAMPLE.COM)
```

Utilizing privileges of AD security group membership

Inheriting server-level privileges

AD users that are members of given AD security group will inherit server-level privileges granted to the mapped Windows group login. For example, consider the `accounts-group` AD security group, that is granted membership to the `sysadmin` server role on the Babelfish. You can inherit the server-level privileges using the following command:

```
1> ALTER SERVER ROLE sysadmin ADD MEMBER [corp\accounts-group];
```

Consequently, any Active Directory user who is a member of the `accounts-group` AD security group will inherit the server-level privileges associated with the `sysadmin` role. This means that a user like `corp\user1`, being a member of `accounts-group`, will now have the ability to perform server-level operations within Babelfish.

> **Note**
>
> To perform server-level DDLs, Windows login for individual AD user must exist. For more information, see Limitations.

Inheriting database-level privileges

To grant the database level privileges, a database user has to be created and mapped with Windows group login. AD users which are members of given AD security group will inherit database-level privileges granted to that database user. In the following example, you can see how database level privileges for Windows group [corp\accounts-group] are assigned.

```
1> CREATE DATABASE db1;
2> GO
1> USE db1;
2> GO
Changed database context to 'db1'.
1> CREATE TABLE dbo.t1(a int);
2> GO
```

Create a database user [corp\sales-group] for Windows group login [corp\accounts-group]. To perform this step, connect through TDS endpoint using login who is a member of sysadmin.

```
1> CREATE USER [corp\accounts-group] FOR LOGIN [corp\accounts-group];
2> GO
```

Now, connect as AD user user1 to check access of table t1. Since we have not yet granted the database level privileges, it will result in permission denied error.

```
1> SELECT * FROM dbo.t1;
2> GO
Msg 33557097, Level 16, State 1, Server db-inst, Line 1
permission denied for table t1
```

Grant SELECT on table t1 to database user [corp\accounts-group]. To perform this step, connect through TDS endpoint using login who is member of sysadmin.

```
1> GRANT SELECT ON dbo.t1 TO [corp\accounts-group];
2> GO
```

Connect as AD user user1 to validate the access.

```
1> SELECT * FROM dbo.t1;
2> GO
a
-----------

(0 rows affected)
```

Handling DDL Statement behavior based on default or explicit schema

When using an AD authenticated session, the default schema for the current session is determined by the following conditions:

- If an individual database user exists, the user's default schema is considered as current session’s default schema.
- If the default schema for a group database user exists, the group database user's default schema is considered as current session’s default schema with the smallest principal id.

Understanding CREATE DDL statement behavior

If there is no explicit schema specified in the CREATE DDL statement then object creation will take place in the default schema of current session. If the schema can't be determined whether default or explicit, then the DDL statement will throw following error:

```
"Babelfish Unsupported Command : Schema required for CREATE DDLs when connecting with
 Active Directory Group authentication. Assign default schema to group user or specify
 schema in command."
```

Example: Default schema doesn’t exist for Windows group user

Windows group user [corp\accounts-group] have NULL default schema and AD user user1 is trying to perform the DDL without specifying the schema explicitly. Since individual windows login and user doesn’t exist for user1, it will get the database level privileges of Windows group user [corp \accounts-group] only.

```
1> create TABLE t2(a int);
2> GO

Msg 33557097, Level 16, State 1, Server db-inst, Line 1
Babelfish Unsupported Command : Schema required for CREATE DDLs when connecting with
 Active Directory Group authentication. Assign default schema to group user or specify
 schema in command.
```

Note

Individual windows login and user doesn’t exist for AD user user1

Example: Default schema exists for Windows group users

Create Windows group user for [corp\accounts-group] login with default schema using sysadmin.

```
1> CREATE USER [corp\accounts-group] FOR LOGIN [corp\accounts-group] WITH
 DEFAULT_SCHEMA = sch_acc;
2> GO
1> CREATE SCHEMA sch_acc AUTHORIZATION [gad\accounts-group];
2> GO
1> SELECT name, principal_id, default_schema_name FROM sys.database_principals WHERE
 name = 'corp\accounts-group';
2> GO

name               principal_id default_schema_name
------------------ ------------ ------------------
corp\accounts-group 24162        sch_acc

(1 rows affected)
```

Try creating object without specifying schema explicitly using AD user user1. Table t2 will be created in default schema of [corp\accounts-group] Windows group user Owner of this object will be same as owner of schema sch_acc.

```
1> CREATE TABLE t_group(a int);
2> GO
1> SELECT name, schema_name(schema_id) FROM sys.objects WHERE name like 't_group';
2> GO

name    schema_name
------- -----------
t_group sch_acc

(1 rows affected)
```

Note

Individual windows login and user doesn't exist for AD user user1

Example: Individual database user also exists for an AD user

If an individual database user also exists for an AD user then the objects will always be created in the schema associated with individual database user. If the schema doesn't exist for the database user then dbo schema will be used. Create individual windows login and database user for AD user user1. Connect through TDS endpoint using a sysadmin login

```
1> CREATE LOGIN [corp\user1] FROM WINDOWS;
2> GO
1> CREATE USER [corp\user1] FOR LOGIN [corp\user1] WITH DEFAULT_SCHEMA = sch1;
2> GO
1> CREATE SCHEMA sch1 AUTHORIZATION [corp\user1];
2> GO
1> SELECT name, default_schema_name FROM sys.database_principals WHERE name = 'corp
\user1';
2> GO

name      default_schema_name
--------- -------------------
corp\user1 sch1

(1 rows affected)
```

Connect using AD user user1 and try creating object without specifying schema explicitly. Table t2 will be created in schema sch1. Also note that owner of this object will be same as owner of schema sch1.

```
1> CREATE TABLE t2(a int);
2> GO
1> SELECT name, schema_name(schema_id) FROM sys.objects WHERE name like 't2';
2> GO

name schema_name
---- -----------
t2   sch1

(1 rows affected)
```

Limitations

- Dump/Restore utility doesn't support dumping the pg_ad_mapping extension mappings. You will need to recreate those mappings after restore.
- Blue-Green deployment isn't supported for Babelfish and Aurora PostgreSQL instances with `pg_ad_mapping`.
- Implicit schema creation is not supported. DDL statements that requires implicit schema creation isn't supported.
- Server-level DDLs ALTER AUTHORIZATION ON DATABASE , CREATE DATABASE, CREATE LOGIN, ALTER LOGIN, ALTER SERVER ROLE, ALTER DATABASE are not supported in a Group AD authenticated session when individual Windows login doesn't exist, only group Windows login exists. To workaround this limitation, It is recommended to perform these operations in a password authenticated session or create individual Windows login.
- Implicit user creation isn't supported. Ideal T-SQL behavior [not yet supported in Babelfish]; In some cases like DDL and access-control statements like GRANT/REVOKE where AD user's name is specified in the command but it doesn't exist in database then database user named as AD user get implicitly created.
- For DDLs in PL/pgSQL Procedures or Functions which are created from PSQL endpoint and gets executed from TDS endpoint in Group AD authenticated session:
  - ALTER/DROP statements will be supported.
  - CREATE TABLE, CREATE VIEW, CREATE INDEX, CREATE FUNCTION/PROC, CREATE TYPE, CREATE SEQUENCE, CREATE TRIGGER, SELECT INTO, CREATE FULLTEXT INDEX , CREATE UNIQUE INDEX will throw an error if schema is not provided explicitly and default schema is null for current session.
  - CREATE DATABASE , CREATE EXTENSION and all other CREATE statements for PG(not in T-SQL) specific objects CREATE subscription, CREATE tablespace, CREATE policy, CREATE conversion will not be supported.
- DDLs from PostgreSQL endpoint is not supported in Group AD authenticated session. As a workaround, you can always connect using master user or any other user using password based authentication mechanism.
- System objects like SUSER_SID(), IS_SRVROLEMEMBER(), IS_MEMBER(), sys.dm_exec_sessions has following limitations.
  - SUSER_SID() won't return the SID when AD User or AD Security Group is supplied.

- IS_SRVROLEMEMBER() won't consider the role membership if current AD user is inheriting the server role membership from any Windows group login's server role membership.
- IS_MEMBER() will return false for any Windows Group related query.
- sys.dm_exec_sessions won't show expected values login_name, nt_user_name columns.

Connecting to Babelfish via PostgreSQL endpoint on the PostgreSQL port

You can utilize group logins created from the TDS port to connect through PostgreSQL port as well. To connect through PostgreSQL port, you need to specify the AD user's name in the format `<ad_username@FQDN>` from the PostgreSQL client applications. You can't use the `<DNS domain name\ad_username>` format.

PostgreSQL uses case-sensitive comparisons by default for usernames. For Aurora PostgreSQL to interpret Kerberos usernames as case-insensitive, you must set the krb_caseins_users parameter as true in the custom Babelfish cluster parameter group. This parameter is set to false by default. For more information, see Configuring your Aurora PostgreSQL DB cluster for case-insensitive user names.

Behavior differences between T-SQL and PostgreSQL endpoints when an AD user is part of multiple groups

Consider that AD user user1 is part of two AD security groups [corp\accounts-group] and [corp \sales-group] and DB admin has set the user mapping in following way.

```
postgres=> select * from pgadmap_read_mapping();

ad_sid       | pg_role                          | weight | ad_grp
-------------+----------------------------------+--------+---------------
S-1-5-67-980 | accounts-group@CORP.EXAMPLE.COM | 7      | accounts-group
S-1-2-34-560 | sales-group@CORP.EXAMPLE.COM    | 10     | sales-group
(2 rows)
```

If the user is connecting from the T-SQL endpoint then during the authorization, it will inherit the privileges from all the associated T-SQL logins. In this example user1 will inherit the union of privileges from both the T-SQL group login and weights will be ignored. This is inline with the standard T-SQL behavior.

However if same user connects from the PostgreSQL endpoint then it can inherit privileges from only one associated T-SQL login with the highest weight. If the two T-SQL group login were assigned same weight then AD user will inherit the privileges of the T-SQL login corresponding to the mapping that was added most recently. For the PostgreSQL, the recommendation is to specify weights that reflect the relative permissions/privileges of individual DB roles to avoid the ambiguity. In below example, user1 connected through PSQL endpoint and inherited only sales-groups privileges.

```
babelfish_db=> select session_user, current_user;

   session_user               |   current_user
------------------------------+--------------------------
 sales-group@CORP.EXAMPLE.COM | sales-group@CORP.EXAMPLE.COM
(1 row)


babelfish_db=> select principal, gss_authenticated from pg_stat_gssapi where pid =
 pg_backend_pid();

     principal          | gss_authenticated
------------------------+-------------------
 user1@CORP.EXAMPLE.COM | t
(1 row)
```

Connecting to a Babelfish DB cluster

To connect to Babelfish, you connect to the endpoint of the Aurora PostgreSQL cluster running Babelfish. Your client can use one of the following client drivers compliant with TDS version 7.1 through 7.4:

- Open Database Connectivity (ODBC)
- OLE DB Driver/MSOLEDBSQL
- Java Database Connectivity (JDBC) version 8.2.2 (mssql-jdbc-8.2.2) and higher
- Microsoft SqlClient Data Provider for SQL Server
- .NET Data Provider for SQL Server
- SQL Server Native Client 11.0 (deprecated)
- OLE DB Provider/SQLOLEDB (deprecated)

With Babelfish, you run the following:

- SQL Server tools, applications, and syntax on the TDS port, by default port 1433.
- PostgreSQL tools, applications, and syntax on the PostgreSQL port, by default port 5432.

To learn more about connecting to Aurora PostgreSQL in general, see Connecting to an Amazon Aurora PostgreSQL DB cluster.

> **Note**
>
> Third-party developer tools using the SQL Server OLEDB provider to access metadata aren't supported. We recommend you to use SQL Server JDBC, ODBC, or SQL Native client connections for these tools.

Starting with Babelfish version 5.1.0, end-to-end connection encryption is enforced by default. To ensure continued connectivity:

- Configure SSL/TLS encryption for your connections. For more information, see Using SSL/TLS to encrypt a connection to a DB cluster.
- Import the required certificates on your client computers. For more information, see Using SSL with a Microsoft SQL Server DB instance.

If you want to continue using the encryption settings from a previous version of Babelfish (prior to version 5.1.0), you can set the `rds.force_ssl` parameter to `0` in your DB cluster parameter group.

Topics


- Finding the writer endpoint and port number
- Creating C# or JDBC client connections to Babelfish
- Using a SQL Server client to connect to your DB cluster
- Using a PostgreSQL client to connect to your DB cluster

Finding the writer endpoint and port number

To connect to your Babelfish DB cluster, you use the endpoint associated with the DB cluster's writer (primary) instance. The instance must have a status of **Available**. It can take up to 20 minutes for the instances to be available after creating the Babelfish for Aurora PostgreSQL DB cluster.

To find your database endpoint

1. Open the console for Babelfish.
2. Choose **Databases** from the navigation pane.
3. Choose your Babelfish for Aurora PostgreSQL DB cluster from those listed to see its details.
4. On the **Connectivity & security** tab, note the available cluster **Endpoints** values. Use the cluster endpoint for the writer instance in your connection strings for any applications that perform database write or read operations.

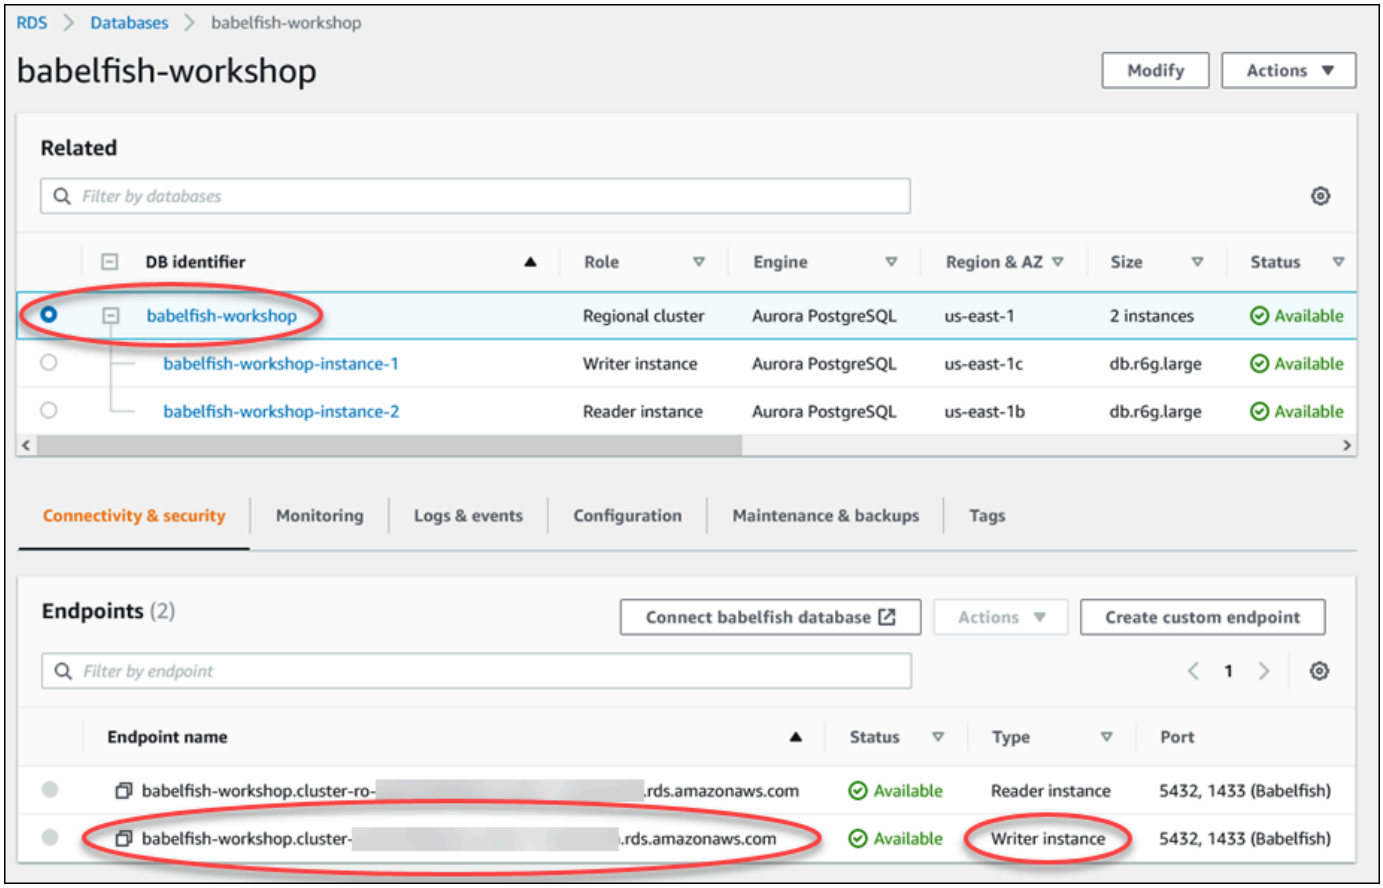

For more information about Aurora DB cluster details, see Creating an Amazon Aurora DB cluster.

Creating C# or JDBC client connections to Babelfish

In the following you can find some examples of using C# and JDBC classes to connect to an Babelfish for Aurora PostgreSQL.

Example: Using C# code to connect to a DB cluster

```
string dataSource = 'babelfishServer_11_24';

//Create connection
connectionString = @"Data Source=" + dataSource
    +";Initial Catalog=your-DB-name"
    +";User ID=user-id;Password=password";

// [optional] To validate server certificate during TLS/SSL connection
connectionString = connectionString + ";ServerCertificate=/path/to/certificate.pem";


SqlConnection cnn = new SqlConnection(connectionString);
cnn.Open();
```

Example: Using generic JDBC API classes and interfaces to connect to a DB cluster

```
String dbServer =
   "database-babelfish.cluster-123abc456def.us-east-1-rds.amazonaws.com";
String connectionUrl = "jdbc:sqlserver://" + dbServer + ":1433;" +
    "databaseName=your-DB-name;user=user-id;password=password";

// [optional] To validate server certificate during TLS/SSL connection
connectionUrl = connectionUrl + ";serverCertificate=/path/to/certificate.pem";

// Load the SQL Server JDBC driver and establish the connection.
System.out.print("Connecting Babelfish Server ... ");
Connection cnn = DriverManager.getConnection(connectionUrl);
```

Example: Using SQL Server-specific JDBC classes and interfaces to connect to a DB cluster

```
// Create datasource.
SQLServerDataSource ds = new SQLServerDataSource();
ds.setUser("user-id");
ds.setPassword("password");
String babelfishServer =
```

```
   "database-babelfish.cluster-123abc456def.us-east-1-rds.amazonaws.com";

ds.setServerName(babelfishServer);
ds.setPortNumber(1433);
ds.setDatabaseName("your-DB-name");

// [optional] To validate server certificate during TLS/SSL connection
ds.setServerCertificate("/path/to/certificate.pem");

Connection con = ds.getConnection();
```

Important

Ensure the certificate matches the Certificate Authority shown in your DB cluster configuration on the Amazon Web Services Management Console.

Using a SQL Server client to connect to your DB cluster

You can use a SQL Server client to connect with Babelfish on the TDS port. As of Babelfish 2.1.0 and higher releases, you can use the SSMS Object Explorer or the SSMS Query Editor to connect to your Babelfish cluster.

Limitations

- Babelfish doesn't support MARS (Multiple Active Result Sets). Be sure that any client applications that you use to connect to Babelfish aren't set to use MARS.

For more information about interoperability and behavioral differences between SQL Server and Babelfish, see Differences between Babelfish for Aurora PostgreSQL and SQL Server.

Using sqlcmd to connect to the DB cluster

You can connect to and interact with an Aurora PostgreSQL DB cluster that supports Babelfish by SQL Server `sqlcmd` command line client. Use the following command to connect.

```
sqlcmd -S endpoint,port -U login-id -P password -d your-DB-name
```

The options are as follows:

- `-S` is the endpoint and (optional) TDS port of the DB cluster.
- `-U` is the login name of the user.
- `-P` is the password associated with the user.
- `-d` is the name of your Babelfish database.

After connecting, you can use many of the same commands that you use with SQL Server. For some examples, see Getting information from the Babelfish system catalog.

Using SSMS to connect to the DB cluster

You can connect to an Aurora PostgreSQL DB cluster running Babelfish by using Microsoft SQL Server Management Studio (SSMS). SSMS includes a variety of tools, including the SQL Server Import amd Export Wizard discussed in Migrating a SQL Server database to Babelfish for Aurora PostgreSQL. For more information about SSMS, see Download SQL Server Management Studio

(SSMS) in the Microsoft documentation. To configure SSL/TLS, see Using SSL with a Microsoft SQL Server DB instance.


> **Note**
>
> SSMS version 19.2 and later requires Babelfish version 3.5.0 (Aurora PostgreSQL 15.6) or higher to display databases in Object Explorer.

To connect to your Babelfish database with SSMS

1. Start SSMS.
2. Open the **Connect to Server** dialog box. To continue with the connection, do one of the following:
   - Choose **New Query**.
   - If the Query Editor is open, choose **Query**, **Connection**, **Connect**.
3. Provide the following information for your database:
   a. For **Server type**, choose **Database Engine**.
   b. For **Server name**, enter the DNS name. For example, your server name should look similar to the following.


      ```
      cluster-name.cluster-555555555555.aws-region.rds.amazonaws.com,1433
      ```

   c. For **Authentication**, choose **SQL Server Authentication**.
   d. For **Login**, enter the user name that you chose when you created your database.
   e. For **Password**, enter the password that you chose when you created your database.

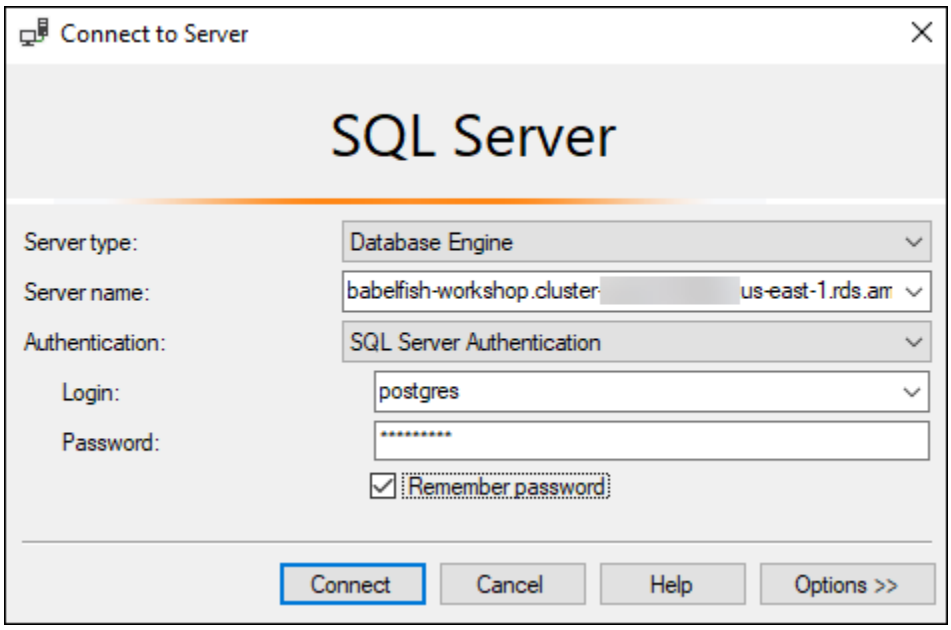

> **Note**
>
> Babelfish 5.1.0 and later versions use TLS by default. You can either install the root CA certificate on the client or select the **Trust server certificate** checkbox on the Login tab.

4. (Optional) Choose **Options**, and then choose the **Connection Properties** tab.

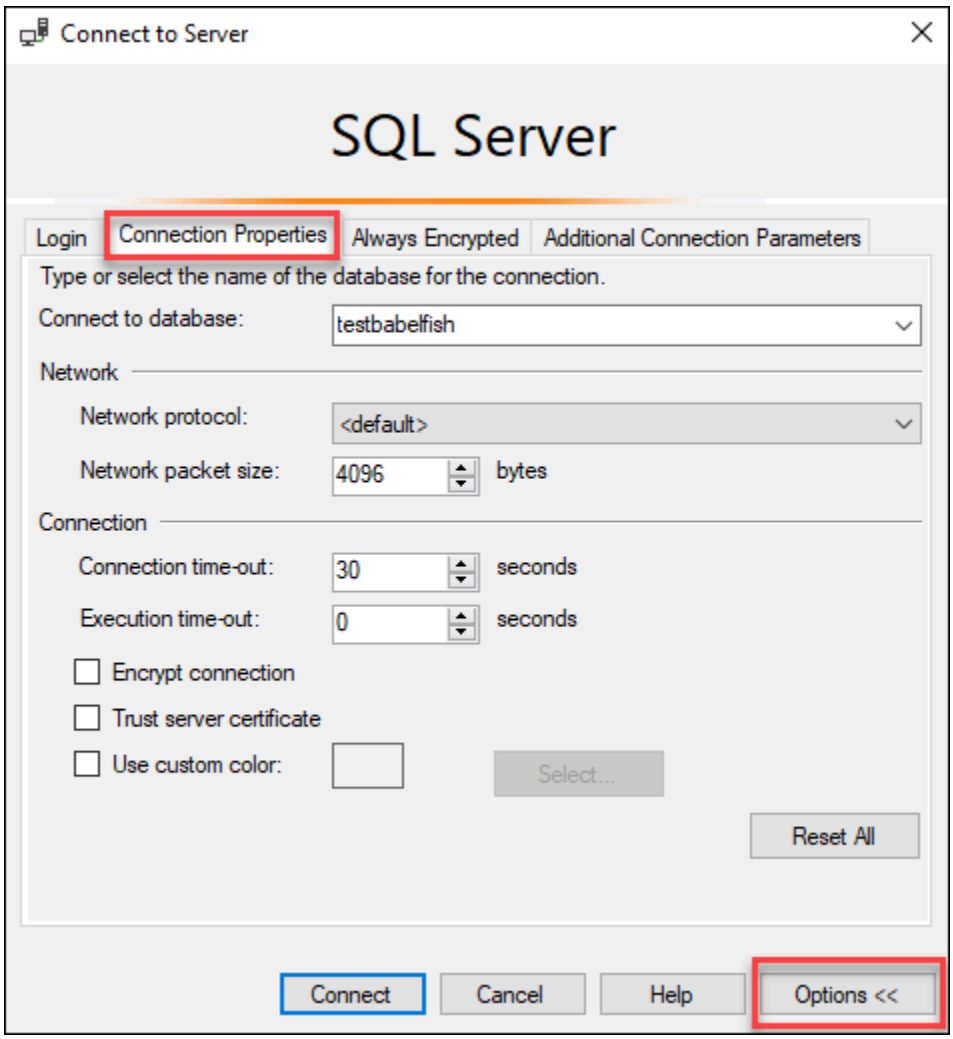

5. (Optional) For **Connect to database**, specify the name of the migrated SQL Server database to connect to, and choose **Connect**.

   If a message appears indicating that SSMS can't apply connection strings, choose **OK**.

   If you are having trouble connecting to Babelfish, see Connection failure.

   For more information about SQL Server connection issues, see Troubleshooting connections to your SQL Server DB instance in the *Amazon RDS User Guide*.

Using a PostgreSQL client to connect to your DB cluster

You can use a PostgreSQL client to connect to Babelfish on the PostgreSQL port. Starting with version 5.1.0, the Babelfish server enforces end-to-end connection encryption by default. Update your application to work with SSL/TLS certificates. For more information about configuring SSL/TLS certificates, see the section called “Securing Aurora PostgreSQL data with SSL/TLS”.

Using psql to connect to the DB cluster

You can download the PostgreSQL client from the PostgreSQL website. Follow the instructions specific to your operating system version to install psql.

You can query an Aurora PostgreSQL DB cluster that supports Babelfish with the `psql` command line client. When connecting, use the PostgreSQL port (by default, port 5432). Typically, you don't need to specify the port number unless you changed it from the default. Use the following command to connect to Babelfish from the `psql` client:

```
psql -h bfish-db.cluster-123456789012.aws-region.rds.amazonaws.com
-p 5432 -U postgres -d babelfish_db
```

The parameters are as follows:

- `-h` – The host name of the DB cluster (cluster endpoint) that you want to access.
- `-p` – The PostgreSQL port number used to connect to your DB instance.
- `-d` – The database that you want to connect to. The default is `babelfish_db`.
- `-U` – The database user account that you want to access. (The example shows the default master username.)

When you run a SQL command on the psql client, you end the command with a semicolon. For example, the following SQL command queries the pg_tables system view to return information about each table in the database.

```
SELECT * FROM pg_tables;
```

The psql client also has a set of built-in metacommands. A *metacommand* is a shortcut that adjusts formatting or provides a shortcut that returns meta-data in an easy-to-use format. For example, the following metacommand returns similar information to the previous SQL command:

\d

Metacommands don't need to be terminated with a semicolon (;).

To exit the psql client, enter \q.


For more information about using the psql client to query an Aurora PostgreSQL cluster, see the PostgreSQL documentation.

Using pgAdmin to connect to the DB cluster

You can use the pgAdmin client to access your data in native PostgreSQL dialect.

To connect to the cluster with the pgAdmin client

1. Download and install the pgAdmin client from the pgAdmin website.
2. Open the client and authenticate with pgAdmin.
3. Open the context (right-click) menu for **Servers**, and then choose **Create**, **Server**.

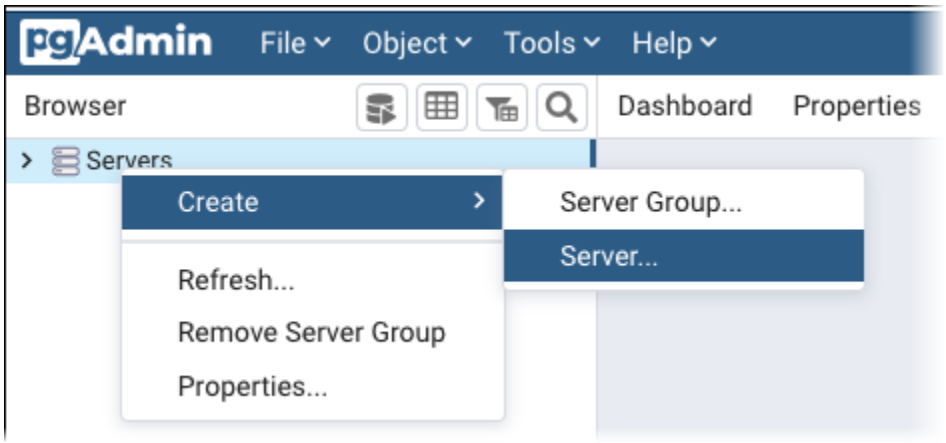


4. Enter information in the **Create - Server** dialog box.

   On the **Connection** tab, add the Aurora PostgreSQL cluster address for **Host** and the PostgreSQL port number (by default, 5432) for **Port**. Provide authentication details, and choose **Save**.



After connecting, you can use pgAdmin functionality to monitor and manage your Aurora PostgreSQL cluster on the PostgreSQL port.

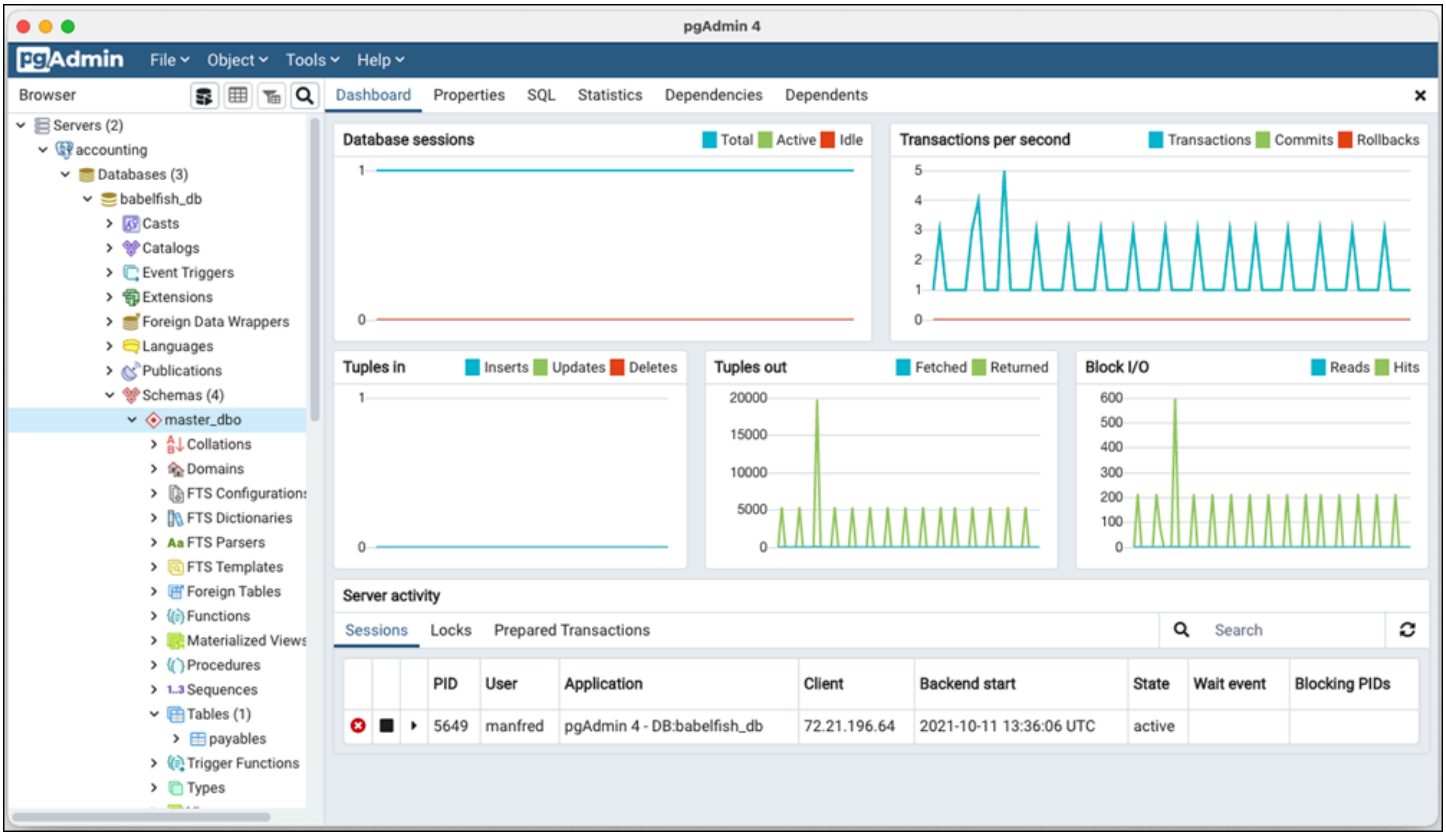

To learn more, see the pgAdmin web page.

Working with Babelfish

Following, you can find usage information for Babelfish, including some of the differences between working with Babelfish and SQL Server, and between Babelfish and PostgreSQL databases.

For information about how Babelfish handles transactions, see Transaction isolation levels in Babelfish.

For information about the PostgreSQL and Amazon extensions that Babelfish supports, see Using Aurora PostgreSQL extensions with Babelfish.

Topics

- Getting information from the Babelfish system catalog
- Managing permissions and access control in Babelfish for Aurora PostgreSQL
- Differences between Babelfish for Aurora PostgreSQL and SQL Server
- Using Babelfish features with limited implementation
- Improving Babelfish query performance
- Using Aurora PostgreSQL extensions with Babelfish
- Babelfish supports linked servers
- Using Full Text Search in Babelfish
- Babelfish supports Geospatial data types
- Understanding partitioning in Babelfish
- Babelfish temporary tables on read replicas

Getting information from the Babelfish system catalog

You can obtain information about the database objects that are stored in your Babelfish cluster by querying many of the same system views as used in SQL Server. Each new release of Babelfish adds support for more system views. For a list of available views currently available, see the SQL Server system catalog views table.

These system views provide information from the system catalog (`sys.schemas`). In the case of Babelfish, these views contain both SQL Server and PostgreSQL system schemas. To query Babelfish for system catalog information, you can use the TDS port or the PostgreSQL port, as shown in the following examples.

- **Query the T-SQL port using `sqlcmd` or another SQL Server client**.

```
1> SELECT * FROM sys.schemas
2> GO
```

  This query returns SQL Server and Aurora PostgreSQL system schemas, as shown in the following.

```
name
------------------------------------------------------------
demographic_dbo
public
sys
master_dbo
tempdb_dbo
...
```

- **Query the PostgreSQL port using `psql` or `pgAdmin`**. This example uses the `psql` list schemas metacommand (\dn):

```
babelfish_db=> \dn
```

  The query returns the same result set as that returned by `sqlcmd` on the T-SQL port.

```
        List of schemas
             Name
-----------------------------

 demographic_dbo

 public
 sys
 master_dbo
 tempdb_dbo
...
```

SQL Server system catalogs available in Babelfish

In the following table you can find the SQL Server views currently implemented in Babelfish. For more information about the system catalogs in SQL Server, see System Catalog Views (Transact-SQL) in Microsoft documentation.

View name	Description or Babelfish limitation (if any)
`sys.all_columns`	All columns in all tables and views
`sys.all_objects`	All objects in all schemas
`sys.all_sql_modules`	The union of `sys.sql_modules` and `sys.system_sql_modules`
`sys.all_views`	All views in all schemas
`sys.columns`	All columns in user-defined tables and views
`sys.configurations`	Babelfish support limited to a single read-only configuration.
`sys.data_spaces`	Contains a row for each data space. This can be a filegroup, partition scheme, or FILESTREAM data filegroup.
`sys.database_files`	A per-database view that contains one row for each file of a database as stored in the database itself.
`sys.database_mirroring`	For information, see sys.database_mirroring in Microsoft Transact-SQL documentation.
`sys.database_principals`	For information, see sys.database_principals in Microsoft Transact-SQL documentation.
`sys.database_role_members`	For information, see sys.database_role_members in Microsoft Transact-SQL documentation.

View name	Description or Babelfish limitation (if any)
sys.databases	All databases in all schemas
sys.dm_exec_connections	For information, see sys.dm_exec_connections in Microsoft Transact-SQL documentation.
sys.dm_exec_sessions	For information, see sys.dm_exec_sessions in Microsoft Transact-SQL documentation.
sys.dm_hadr_database_replica_states	For information, see sys.dm_hadr_database_replica_states in Microsoft Transact-SQL documentation.
sys.dm_os_host_info	For information, see sys.dm_os_host_info in Microsoft Transact-SQL documentation.
sys.endpoints	For information, see sys.endpoints in Microsoft Transact-SQL documentation.
sys.indexes	For information, see sys.indexes in Microsoft Transact-SQL documentation.
sys.languages	For information, see sys.languages in Microsoft Transact-SQL documentation.
sys.schemas	All schemas
sys.server_principals	All logins and roles
sys.sql_modules	For information, see sys.sql_modules in Microsoft Transact-SQL documentation.
sys.sysconfigures	Babelfish support limited to a single read-only configuration.
sys.syscurconfigs	Babelfish support limited to a single read-only configuration.

View name	Description or Babelfish limitation (if any)
`sys.sysprocesses`	For information, see sys.sysprocesses in Microsoft Transact-SQL documentation.
`sys.system_sql_modules`	For information, see sys.system_sql_modules in Microsoft Transact-SQL documentation.
`sys.table_types`	For information, see sys.table_types in Microsoft Transact-SQL documentation.
`sys.tables`	All tables in a schema
`sys.xml_schema_collections`	For information, see sys.xml_schema_collections in Microsoft Transact-SQL documentation.

PostgreSQL implements system catalogs that are similar to the SQL Server object catalog views. For a complete list of system catalogs, see System Catalogs in the PostgreSQL documentation.

DDL exports supported by Babelfish

From Babelfish 2.4.0 and 3.1.0 versions, Babelfish supports DDL exports using various tools. For example, you can use this functionality from SQL Server Management Studio (SSMS) to generate the data definition scripts for various objects in a Babelfish for Aurora PostgreSQL database. You can then use the generated DDL commands in this script to create the same objects in another Babelfish for Aurora PostgreSQL or SQL Server database.

Babelfish supports DDL exports for the following objects in the specified versions.

List of objects	2.4.0	3.1.0
User tables	Yes	Yes
Primary keys	Yes	Yes
Foreign keys	Yes	Yes
Unique constraints	Yes	Yes

List of objects	2.4.0	3.1.0
Indexes	Yes	Yes
Check constraints	Yes	Yes
Views	Yes	Yes
Stored procedures	Yes	Yes
User-defined functions	Yes	Yes
Table-valued functions	Yes	Yes
Triggers	Yes	Yes
User Defined Datatypes	No	No
User Defined Table Types	No	No
Users	No	No
Logins	No	No
Sequences	No	No
Roles	No	No

Limitations with the exported DDLs

- **Use escape hatches before recreating the objects with the exported DDLs** – Babelfish doesn't support all the commands in the exported DDL script. Use escape hatches to avoid errors caused when recreating the objects from the DDL commands in Babelfish. For more information on escape hatches, see Managing Babelfish error handling with escape hatches
- **Objects containing CHECK constraints with explicit COLLATE clauses** – The scripts with these objects generated from a SQL Server database have different but equivalent collations as in the Babelfish database. For example, a few collations, such as sql_latin1_general_cp1_cs_as, sql_latin1_general_cp1251_cs_as, and latin1_general_cs_as are generated as latin1_general_cs_as, which is the closest Windows collation.

Managing permissions and access control in Babelfish for Aurora PostgreSQL

In Babelfish for Aurora PostgreSQL, you can manage permissions and access control for databases, schemas, and objects. The following tables will outline the specific SQL commands for granting permissions in Babelfish to achieve various access control scenarios. It will cover supported use cases that can be implemented as well as workarounds for currently unsupported cases. This will allow you to configure appropriate permissions to meet your security and compliance requirements when working with Babelfish databases.

Supported use cases

The following table explains the use cases that are supported in Babelfish. For each use case, the table shows the action needed to achieve it and sample SQL commands.

Use case	Action	SQL commands	Comments	Babelfish version compatibility
Allow login to do SELECTs/DMLs/DDLs in any database	Add login to sysadmin server role	ALTER SERVER ROLE sysadmin ADD MEMBER `login`	None	All versions
Allow login to do SELECTs/DMLs/DDLs in a database	Make login the owner of the database	ALTER AUTHORIZATION ON DATABASE::`database` TO `login`	A database can have only one owner.	Version 3.4 and higher
Allow database user to do SELECTs/DMLs on a schema	Grant permission to database user on schema	GRANT SELECT/EXECUTE/INSERT/UPDATE/DELETE ON SCHEMA::`schema` TO `user`	None	Version 3.6 and higher, 4.2 and higher
Allow database user to do	Make database user owner	CREATE SCHEMA `schema`	Changing schema	Version 1.2 and higher

Use case	Action	SQL commands	Comments	Babelfish version compatibility
SELECTs/DMLs on a schema	of schema at schema creation time	AUTHORIZATION `user`	ownership after creation isn't currently supported.	
Allow database user to do SELECTs/DMLs on an object	Grant permission to database user on object	GRANT SELECT/EXECUTE/INSERT/UPDATE/DELETE ON OBJECT::`object` TO `user`	None	All versions
Allow database user to do SELECTs/DMLs/DDLs in a database including dropping database	Add user to db_owner fixed database role	ALTER ROLE db_owner ADD MEMBER `user`	Only users can be added db_owner fixed database role. Adding roles to db_owner role is not yet supported.	Version 4.5 and higher, 5.1 and higher
Allow user or members of a custom database role to do only SELECTs in a database	Add user or role to db_datareader fixed database role	ALTER ROLE db_datareader ADD MEMBER `user` / `role`	None	Version 4.5 and higher, 5.1 and higher
Allow user or members of a custom database role to do only DMLs in a database	Add user or role to db_datawriter fixed database role	ALTER ROLE db_datawriter ADD MEMBER `user` / `role`	None	Version 4.5 and higher, 5.1 and higher

Use case	Action	SQL commands	Comments	Babelfish version compatibility
Allow user or members of a custom database role to do only DDLs in a database	Add user or role to db_access admin fixed database role	ALTER ROLE db_accessadmin ADD MEMBER `user` / `role`	None	Version 4.5 and higher, 5.1 and higher
Allow user or members of a custom database role to only CREATE/ ALTER/DROP custom roles, GRANT/REV OKE permissions on objects in a database and/or CREATE SCHEMA in a database	Add user or role to db_securi tyadmin fixed database role	ALTER ROLE db_securi tyadmin ADD MEMBER `user` / `role`	None	Version 4.5 and higher, 5.1 and higher

Use case	Action	SQL commands	Comments	Babelfish version compatibility
Allow user or members of a custom database role to only CREATE/ALTER/DROP any user, grant and revoke database access and map user accounts to logins and/or CREATE SCHEMA in a database	Add user or role to db_access admin fixed database role	ALTER ROLE db_accessadmin ADD MEMBER `user` / `role`	None	Version 4.5 and higher, 5.1 and higher
Allow login to only CREATE/DROP/ALTER any database	Add login to dbcreator fixed server role	ALTER SERVER ROLE dbcreator ADD MEMBER `login`	Only those databases can be altered on which dbcreator login has access.	Version 4.5 and higher, 5.1 and higher
Allow login to only CREATE/ALTER/DROP any login	Add login to securityadmin fixed server role	ALTER SERVER ROLE securityadmin ADD MEMBER `login`	None	Version 4.5 and higher, 5.1 and higher

Unsupported use cases with the workarounds

The following table explains the use cases that aren't supported in Babelfish, but which can be achieved using a workaround.

Use case	Action	SQL commands	Comments	Babelfish version compatibility for workarounds
Allow user to do SELECTs/DMLs on an object/schema along with option to GRANT these permissions to other users	GRANT the permissions to all the other users directly	GRANT SELECT/EXECUTE/INSERT/UPDATE/DELETE ON OBJECT/SCHEMA::`object/sc` TO `user`	GRANT ... WITH GRANT OPTION isn't currently supported.	Version 3.6 and higher, 4.2 and higher
Allow database user to do SELECTs/DMLs/DDLs in a database including dropping database	Add members of role to db_owner fixed database role	ALTER ROLE db_owner ADD MEMBER `user`	Adding roles to db_owner role isn't currently supported.	Version 4.5 and higher, 5.1 and higher

Unsupported use cases

The following table explains the use cases that aren't supported in Babelfish.

Use case	Comments
Deny user or members of a custom database role to do SELECTs in a database	db_denydatareader fixed database role is not yet supported
Deny user or members of a custom database role to do DMLs in a database	db_denydatawriter fixed database role isn't currently supported.

Use case	Comments
Allow login to only KILL any database connection	processadmin fixed server role isn't currently supported.
Allow login to only add or remove linked servers	setupadmin fixed server role isn't currently supported.

Addressing object ownership differences after upgrade

Babelfish versions 4.6 and later, and 5.2 and later include a change to object ownership handling through the TDS endpoint. When you create new objects through the TDS endpoint, these objects are now owned by the schema owner instead of the current user. This ownership change might affect permissions behavior for new objects compared to existing objects when you upgrade from versions earlier than 4.6 or 5.2.

To resolve these ownership differences, Babelfish provides the `sys.generate_alter_ownership_statements()` function. This function generates SQL statements that align object ownership with schema ownership.

Be aware of the following limitations when addressing object ownership:

- Users with CREATE permissions granted through the PostgreSQL endpoint can't create objects through the TDS endpoint in those schemas.
- Modifying permissions on T-SQL objects through the PostgreSQL endpoint is not recommended and might cause incorrect T-SQL behavior.
- Access permissions might differ between old and new objects because of their ownership mismatch. For example, consider a schema owned by `sch_own` that includes objects owned by dbo. In this case, objects owned by dbo that were created before the upgrade might have different access permissions compared to objects owned by `sch_own` that were created after the upgrade. This may affect operations like SELECT and INSERT.

If your DB cluster includes objects created in Babelfish versions earlier than 4.6 or 5.2, consider aligning their ownership.

To address object ownership differences

1. Connect to the `babelfish_db` database in your DB cluster using the PostgreSQL endpoint.

2. Run the following command:

```
SELECT * from sys.generate_alter_ownership_statements();
```

   This generates a list of SQL statements intended to standardize ownership among the objects.

3. Execute the generated statements on a test environment first to validate their effect before applying on your production environment.

We recommend that you execute these statements to achieve a consistent object ownership model across your database.

Differences between Babelfish for Aurora PostgreSQL and SQL Server

Babelfish is an evolving Aurora PostgreSQL feature, with new functionality added in each release since the initial offering in Aurora PostgreSQL 13.4. It's designed to provide T-SQL semantics on top of PostgreSQL through the T-SQL dialect using the TDS port. Each new version of Babelfish adds features and functions that better align with T-SQL functionality and behavior, as shown in the Supported functionalities in Babelfish by version table. For best results when working with Babelfish, we recommend that you understand the differences that currently exist between the T-SQL supported by SQL Server and Babelfish for the latest version. To learn more, see T-SQL differences in Babelfish.

In addition to the differences between T-SQL supported by Babelfish and SQL Server, you might also need to consider interoperability issues between Babelfish and PostgreSQL in the context of the Aurora PostgreSQL DB cluster. As mentioned previously, Babelfish supports T-SQL semantics on top of PostgreSQL through the T-SQL dialect using the TDS port. At the same time, the Babelfish database can also be accessed through the standard PostgreSQL port with PostgreSQL SQL statements. If you're considering using both PostgreSQL and Babelfish functionality in a production deployment, you need to be aware of the potential interoperability issues between schema names, identifiers, permissions, transactional semantics, multiple result sets, default collations, and so on. In simple terms, when PostgreSQL statements or PostgreSQL access occur in the context of Babelfish, interference between PostgreSQL and Babelfish can occur and can potentially affecting syntax, semantics, and compatibility when new versions of Babelfish are released. For complete information and guidance about all the considerations, see the Guidance on Babelfish Interoperability in the Babelfish for PostgreSQL documentation.

> **Note**
>
> Before using both PostgreSQL native functionality and Babelfish functionality in the same application context, we strongly recommend that you consider the issues discussed in the Guidance on Babelfish Interoperability in the Babelfish for PostgreSQL documentation. These interoperability issues (Aurora PostgreSQL and Babelfish) are relevant only if you plan to use the PostgreSQL database instance in the same application context as Babelfish.

Topics

- Babelfish dump and restore
- T-SQL differences in Babelfish
- Transaction isolation levels in Babelfish

Babelfish dump and restore

Starting with version 4.0.0 and 3.4.0, Babelfish users can now utilize the dump and restore utilities to backup and restore their databases. For more information, see Babelfish dump and restore. This feature is built on top of PostgreSQL dump and restore utilities. For more information, see pg_dump and see pg_restore. In order to effectively use this feature in Babelfish, you need to use PostgreSQL-based tools that are specifically adapted for Babelfish. The backup and restore feature for Babelfish differs significantly from that of SQL Server. For more information on these differences, see Dump and restore functionality differences : Babelfish and SQL Server. Babelfish for Aurora PostgreSQL provides additional capabilities for backing up and restoring Amazon Aurora PostgreSQL DB clusters. For more information, see Backing up and restoring an Amazon Aurora DB cluster.

T-SQL differences in Babelfish

Following, you can find a table of T-SQL functionality as supported in the current release of Babelfish with some notes about differences in the behavior from that of SQL Server.

For more information about support in various versions, see Supported functionalities in Babelfish by version. For information about features that currently aren't supported, see Unsupported functionalities in Babelfish.

Babelfish is available with Aurora PostgreSQL-Compatible Edition. For more information about Babelfish releases, see the *Release Notes for Aurora PostgreSQL*.

Functionality or syntax	Description of behavior or difference
\ (line continuation character)	The line continuation character (a backslash prior to a newline) for character and hexadecimal strings isn't currently supported. For character strings, the backslash-newline is interpreted as characters in the string. For hexadecimal strings, backslash-newline results in a syntax error.
@@version	The format of the value returned by `@@version` is slightly different from the value returned by SQL Server. Your code might not work correctly if it depends on the formatting of `@@version`.
Aggregate functions	Aggregate functions are partially supported (AVG, COUNT, COUNT_BIG, GROUPING, MAX, MIN, STRING_AGG, and SUM are supported). For a list of unsupported aggregate functions, see Functions that aren't supported.
ALTER TABLE	Supports adding or dropping a single column or constraint only.
ALTER TABLE..ALTER COLUMN	NULL and NOT NULL can't currently be specified. To change the nullability of a column, use the postgreSQL statement ALTER TABLE..{SET|DROP} NOT NULL.

AT TIME ZONE	During the transition from Daylight Saving Time (DST) to Standard Time, the overlapping period is displayed using the Standard Time offset. To clarify, consider the following example:
	`SELECT CONVERT(DATETIME2(0), '2022-10-30T02:00:00', 126) AT TIME ZONE 'Central European Standard Time';`
	`GO;`
	`Result: 2022-10-30 02:00:00 +01:00`

Blank column names with no column alias	The `sqlcmd` and `psql` utilities handle columns with blank names differently:

Functionality or syntax	Description of behavior or difference
	• SQL Server `sqlcmd` returns a blank column name. • PostgreSQL `psql` returns a generated column name.
CHECKSUM function	Babelfish and SQL Server use different hashing algorithms for the CHECKSUM function. As a result, the hash values generated by CHECKSUM function in Babelfish might be different from those generated by CHECKSUM function in SQL Server.
Column default	When creating a column default, the constraint name is ignored. To drop a column default, use the following syntax: `ALTER TABLE...ALTER COLUMN..DROP DEFAULT...`
Constraint_name	In SQL Server, constraint names must be unique within the schema to which the table belongs. However, in Babelfish, this applies only to PRIMARY KEY and UNIQUE constraints. Other types of constraints are not subject to this restriction.
Constraints	PostgreSQL doesn't support turning on and turning off individual constraints. The statement is ignored and a warning is raised.
Constraints with IGNORE_DUP_KEY	Constraints are created without this property.
CREATE, ALTER, DROP SERVER ROLE	ALTER SERVER ROLE is supported only for `sysadmin`. All other syntax is unsupported. The T-SQL user in Babelfish has an experience that is similar to SQL Server for the concepts of a login (server principal), a database, and a database user (database principal).

Functionality or syntax	Description of behavior or difference
CREATE, ALTER LOGIN clauses are supported with limited syntax	The CREATE LOGIN... PASSWORD clause, ...DEFAULT_DATABASE clause, and ...DEFAULT_LANGUAGE clause are supported. The ALTER LOGIN... PASSWORD clause is supported, but ALTER LOGIN... OLD_PASSWORD clause isn't supported. Only a login that is a sysadmin member can modify a password.
CREATE DATABASE case-sensitive collation	Case-sensitive collations aren't supported with the CREATE DATABASE statement.
CREATE DATABASE keywords and clauses	Options except COLLATE and CONTAINMENT=NONE aren't supported. The COLLATE clause is accepted and is always set to the value of `babelfishpg_tsql.server_collation_name`.
CREATE SCHEMA... supporting clauses	You can use the CREATE SCHEMA command to create an empty schema. Use additional commands to create schema objects.
Database ID values are different on Babelfish	The master and tempdb databases won't be database IDs 1 and 2.
FORMAT date type function is supported with the following limitations	Single character meridian isn't supported. "yyy" format in SQL server returns 4 digits for year above 1000, but only 3 digits for others. "g" and "R" formats aren't supported "vi-VN" locale translation is slightly different.

Functionality or syntax	Description of behavior or difference
Identifiers exceeding 63 characters	PostgreSQL supports a maximum of 63 characters for identifiers. Babelfish converts identifiers longer than 63 characters to a name that includes a hash of the original name. For example, a table created as "AB(ABC12345678901234567890123456789012345678901234567890123456789012345678901234567890" might be converted to "ABC12345678901234567890123456789012345678901234567890123456789012345678901234567890".
IDENTITY columns support	`IDENTITY` columns are supported for data types `tinyint`, `smallint`, `int`, `bigint`. `numeric`, and `decimal`. SQL Server supports precision to 38 places for data types `numeric` and `decimal` in IDENTITY columns. PostgreSQL supports precision to 19 places for data types `numeric` and `decimal` in IDENTITY columns.
Indexes with IGNORE_DUP_KEY	Syntax that creates an index that includes IGNORE_DUP_KEY creates an index as if this property is omitted.
Indexes with more than 32 columns	An index can't include more than 32 columns. Included index columns count toward the maximum in PostgreSQL but not in SQL Server.
Indexes (clustered)	Clustered indexes are created as if NONCLUSTERED was specified.
Index clauses	The following clauses are ignored: FILLFACTOR, ALLOW_PAGE_LOCKS, ALLOW_ROW_LOCKS, PAD_INDEX, STATISTICS_NORECOMPUTE, OPTIMIZE_FOR_SEQUENTIAL_KEY, SORT_IN_TEMPDB, DROP_EXISTING, ONLINE, COMPRESSION_DELAY, MAXDOP, and DATA_COMPRESSION
JSON support	Order of the name-value pairs isn't guaranteed. But the array type remains unaffected.

Functionality or syntax	Description of behavior or difference
LOGIN objects	All options for LOGIN objects are not supported except for PASSWORD, DEFAULT_DATABASE, DEFAULT_LANGUAGE, ENABLE, DISABLE.
NEWSEQUENTIALID function	Implemented as NEWID; sequential behavior isn't guaranteed. When calling `NEWSEQUENTIALID`, PostgreSQL generates a new GUID value.
OUTPUT clause is supported with the following limitations	OUTPUT and OUTPUT INTO aren't supported in the same DML query. References to non-target table of UPDATE or DELETE operations in an OUTPUT clause aren't supported. OUTPUT... DELETED *, INSERTED * aren't supported in the same query.
Procedure or function parameter limit	Babelfish supports a maximum of 100 parameters for a procedure or function.
ROWGUIDCOL	This clause is currently ignored. Queries referencing `$GUIDGOL` cause a syntax error.
SEQUENCE object support	SEQUENCE objects are supported for the data types tinyint, smallint, int, bigint, numeric, and decimal. Aurora PostgreSQL supports precision to 19 places for data types numeric and decimal in a SEQUENCE.
SQL keyword clause `ON filegroup`	This clause is currently ignored.
SQL keywords `CLUSTERED` and `NONCLUSTERED` for indexes and constraints	Babelfish accepts and ignores the `CLUSTERED` and `NONCLUSTERED` keywords.
`sysdatabases.cmptlevel`	`sysdatabases.cmptlevel` is always set to 120.
tempdb isn't reinitialized at restart	Permanent objects (like tables and procedures) created in tempdb aren't removed when the database is restarted.

Functionality or syntax	Description of behavior or difference
TEXTIMAGE_ON filegroup	Babelfish ignores the `TEXTIMAGE_ON` *`filegroup`* clause.
Time precision	Babelfish supports 6-digit precision for fractional seconds. No adverse effects are anticipated with this behavior.
Transaction isolation levels	READUNCOMMITTED is treated the same as READCOMMITTED.
Virtual computed columns (non-persistent)	Virtual computed columns are created as persistent.
Without SCHEMABINDING clause	This clause isn't supported in functions, procedures, triggers, or views. The object is created, but as if WITH SCHEMABINDING was specified.

Transaction isolation levels in Babelfish

Babelfish supports transaction isolation levels `READ UNCOMMITTED`, `READ COMMITTED` and `SNAPSHOT`. Starting from Babelfish 3.4 version additional isolation levels `REPEATABLE READ` and `SERIALIZABLE` are supported. All the isolation levels in Babelfish are supported with the behavior of corresponding isolation levels in PostgreSQL. SQL Server and Babelfish use different underlying mechanisms for implementing transaction isolation levels (blocking for concurrent access, locks held by transactions, error handling etc). And, there are some subtle differences in how concurrent access may work out for different workloads. For more information on this PostgreSQL behavior, see Transaction Isolation.

Topics

- Overview of the transaction isolation levels
- Setting up the transaction isolation levels
- Enabling or disabling transaction isolation levels
- Comparing Babelfish and SQL Server isolation levels

Overview of the transaction isolation levels

The original SQL Server transaction isolation levels are based on pessimistic locking where only one copy of data exists and queries must lock resources such as rows before accessing them. Later, a variation of the `READ COMMITTED` isolation level was introduced. This enables the use of row versions to provide better concurrency between readers and writers using non-blocking access. In addition, a new isolation level called `SNAPSHOT` is available. It also uses row versions to provide better concurrency than `REPEATABLE READ` isolation level by avoiding shared locks on read data that are held till the end of the transaction.

Unlike SQL Server, all transaction isolation levels in Babelfish are based on optimistic Locking (MVCC). Each transaction sees a snapshot of the data either at the beginning of the statement (`READ COMMITTED`) or at the beginning of the transaction (`REPEATABLE READ`, `SERIALIZABLE`), regardless of the current state of the underlying data. Therefore, the execution behavior of concurrent transactions in Babelfish might differ from SQL Server.

For example, consider a transaction with isolation level `SERIALIZABLE` that is initially blocked in SQL Server but succeeds later. It may end up failing in Babelfish due to a serialization conflict with a concurrent transaction that reads or updates the same rows. There could also be cases where executing multiple concurrent transactions yields a different final result in Babelfish as compared

to SQL Server. Applications that use isolation levels, should be thoroughly tested for concurrency scenarios.

Isolation levels in SQL Server	Babelfish isolation level	PostgreSQL isolation level	Comments
READ UNCOMMITTED	READ UNCOMMITTED	READ UNCOMMITTED	READ UNCOMMITTED is same as READ COMMITTED in Babelfish or PostgreSQL
READ COMMITTED	READ COMMITTED	READ COMMITTED	SQL Server READ COMMITTED is pessimistic locking based, Babelfish READ COMMITTED is snapshot (MVCC) based.
READ COMMITTED SNAPSHOT	READ COMMITTED	READ COMMITTED	Both are snapshot (MVCC) based but not exactly same.
SNAPSHOT	SNAPSHOT	REPEATABLE READ	Exactly same.
REPEATABLE READ	REPEATABLE READ	REPEATABLE READ	SQL Server REPEATABLE READ is pessimistic locking based, Babelfish REPEATABLE READ is snapshot (MVCC) based.
SERIALIZABLE	SERIALIZABLE	SERIALIZABLE	SQL Server SERIALIZABLE is pessimistic isolation, Babelfish SERIALIZA

Isolation levels in SQL Server	Babelfish isolation level	PostgreSQL isolation level	Comments
			BLE is snapshot (MVCC) based.

> **Note**
>
> The table hints are not currently supported and their behavior is controlled by using the Babelfish predefined escape hatch `escape_hatch_table_hints`.

Setting up the transaction isolation levels

Use the following command to set transaction isolation level:

Example

```
SET TRANSACTION ISOLATION LEVEL { READ UNCOMMITTED | READ COMMITTED | REPEATABLE READ |
 SNAPSHOT | SERIALIZABLE }
```

Enabling or disabling transaction isolation levels

Transaction isolation levels `REPEATABLE READ` and `SERIALIZABLE` are disabled by default in Babelfish and you have to explicitly enable them by setting the `babelfishpg_tsql.isolation_level_serializable` or `babelfishpg_tsql.isolation_level_repeatable_read` escape hatch to `pg_isolation` using `sp_babelfish_configure`. For more information, see Managing Babelfish error handling with escape hatches.

Below are examples for enabling or disabling the use of `REPEATABLE READ` and `SERIALIZABLE` in the current session by setting their respective escape hatches. Optionally include `server` parameter to set the escape hatch for the current session as well as for all subsequent new sessions.

To enable the use of `SET TRANSACTION ISOLATION LEVEL REPEATABLE READ` in current session only.

Example

```
EXECUTE sp_babelfish_configure 'isolation_level_repeatable_read', 'pg_isolation'
```

To enable the use of `SET TRANSACTION ISOLATION LEVEL REPEATABLE READ` in current session and all consequent new sessions.

Example

```
EXECUTE sp_babelfish_configure 'isolation_level_repeatable_read', 'pg_isolation',
 'server'
```

To disable the use of `SET TRANSACTION ISOLATION LEVEL REPEATABLE READ` in current session and consequent new sessions.

Example

```
EXECUTE sp_babelfish_configure 'isolation_level_repeatable_read', 'off', 'server'
```

To enable the use of `SET TRANSACTION ISOLATION LEVEL SERIALIZABLE` in current session only.

Example

```
EXECUTE sp_babelfish_configure 'isolation_level_serializable', 'pg_isolation'
```

To enable the use of `SET TRANSACTION ISOLATION LEVEL SERIALIZABLE` in current session and all consequent new sessions.

Example

```
EXECUTE sp_babelfish_configure 'isolation_level_serializable', 'pg_isolation', 'server'
```

To disable the use of `SET TRANSACTION ISOLATION LEVEL SERIALIZABLE` in current session and consequent new sessions.

Example

```
EXECUTE sp_babelfish_configure 'isolation_level_serializable', 'off', 'server'
```

Comparing Babelfish and SQL Server isolation levels

Below are a few examples on the nuances in how SQL Server and Babelfish implement the ANSI isolation levels.

> **Note**
>
> - Isolation level `REPEATABLE READ` and `SNAPSHOT` are the same in Babelfish.
> - Isolation level `READ UNCOMMITTED` and `READ COMMITTED` are the same in Babelfish.

The following example shows how to create the base table for all the examples mentioned below:

```
CREATE TABLE employee (
    id sys.INT NOT NULL PRIMARY KEY,
    name sys.VARCHAR(255)NOT NULL,
    age sys.INT NOT NULL
);
INSERT INTO employee (id, name, age) VALUES (1, 'A', 10);
INSERT INTO employee (id, name, age) VALUES (2, 'B', 20);
INSERT INTO employee (id, name, age) VALUES (3, 'C', 30);
```

Topics

- Babelfish READ UNCOMMITTED compared with SQL Server READ UNCOMMITTED isolation level
- Babelfish READ COMMITTED compared with SQL Server READ COMMITTED isolation level
- Babelfish READ COMMITTED compared with SQL Server READ COMMITTED SNAPSHOT isolation level
- Babelfish REPEATABLE READ compared with SQL Server REPEATABLE READ isolation level
- Babelfish SERIALIZABLE compared with SQL Server SERIALIZABLE isolation level

Babelfish READ UNCOMMITTED compared with SQL Server READ UNCOMMITTED isolation level

The following table provides details on the dirty reads when concurrent transactions are executed. It shows observed results when using the READ UNCOMMITTED isolation level in SQL Server compared to the Babelfish implementation.

Transaction 1	Transaction 2	SQL Server READ UNCOMMITTED	Babelfish READ UNCOMMITTED
BEGIN TRANSACTION	BEGIN TRANSACTION	None	None
SET TRANSACTION ISOLATION LEVEL READ UNCOMMITTED;	SET TRANSACTION ISOLATION LEVEL READ UNCOMMITTED;	None	None
Idle in transaction	UPDATE employee SET age=0;	Update successful.	Update successful.
Idle in transaction	INSERT INTO employee VALUES (4, 'D', 40);	Insert successful.	Insert successful.
SELECT * FROM employee;	Idle in transaction	Transaction 1 can see uncommitted changes from transaction 2.	Same as READ COMMITTED in Babelfish. Uncommitted changes from transaction 2 are not visible to transaction 1.
Idle in transaction	COMMIT	None	None
SELECT * FROM employee;	Idle in transaction	Sees the changes committed by transaction 2.	Sees the changes committed by transaction 2.

Babelfish `READ COMMITTED` compared with SQL Server `READ COMMITTED` isolation level

The following table provides details on the read-write blocking behavior when concurrent transactions are executed. It shows observed results when using the `READ COMMITTED` isolation level in SQL Server compared to the Babelfish implementation.

Transaction 1	Transaction 2	SQL Server `READ COMMITTED`	Babelfish `READ COMMITTED`
`BEGIN TRANSACTION`	`BEGIN TRANSACTION`	None	None
`SET TRANSACTION ISOLATION LEVEL READ COMMITTED;`	`SET TRANSACTION ISOLATION LEVEL READ COMMITTED;`	None	None
`SELECT * FROM employee;`	Idle in transaction	None	None
Idle in transaction	`UPDATE employee SET age=100 WHERE id = 1;`	Update successful.	Update successful.
`UPDATE employee SET age = 0 WHERE age IN (SELECT MAX(age) FROM employee);`	Idle in transaction	Step blocked until transaction 2 commits.	Transaction 2 changes is not visible yet. Updates row with id=3.
Idle in transaction	`COMMIT`	Transaction 2 commits successfully. Transaction 1 is now unblocked and sees the update from transaction 2.	Transaction 2 commits successfully.

Transaction 1	Transaction 2	SQL Server READ COMMITTED	Babelfish READ COMMITTED
`SELECT * FROM employee;`	Idle in transaction	Transaction 1 updates row with id = 1.	Transaction 1 updates row with id = 3.

Babelfish `READ COMMITTED` compared with SQL Server `READ COMMITTED SNAPSHOT` isolation level

The following table provides details on the blocking behavior of the newly inserted rows when concurrent transactions are executed. It shows observed results when using the `READ COMMITTED SNAPSHOT` isolation level in SQL Server compared to the `READ COMMITTED` Babelfish implementation.

Transaction 1	Transaction 2	SQL Server READ COMMITTED SNAPSHOT	Babelfish READ COMMITTED
`BEGIN TRANSACTION`	`BEGIN TRANSACTION`	None	None
`SET TRANSACTION ISOLATION LEVEL READ COMMITTED;`	`SET TRANSACTION ISOLATION LEVEL READ COMMITTED;`	None	None
`INSERT INTO employee VALUES (4, 'D', 40);`	Idle in transaction	None	None
Idle in transaction	`UPDATE employee SET age = 99;`	Step is blocked until transaction 1 commits. Inserted row is locked by transaction 1.	Updated three rows. The newly inserted row is not visible yet.

Transaction 1	Transaction 2	SQL Server READ COMMITTED SNAPSHOT	Babelfish READ COMMITTED
COMMIT	Idle in transaction	Commit successful. Transaction 2 is now unblocked.	Commit successful.
Idle in transaction	SELECT * FROM employee;	All 4 rows have age=99.	Row with id = 4 has age value 40 since it was not visible to transaction 2 during update query. Other rows are updated to age=99.

Babelfish REPEATABLE READ compared with SQL Server REPEATABLE READ isolation level

The following table provides details on the read-write blocking behavior when concurrent transactions are executed. It shows observed results when using the REPEATABLE READ isolation level in SQL Server compared to the REPEATABLE READ Babelfish implementation.

Transaction 1	Transaction 2	SQL Server REPEATABLE READ	Babelfish REPEATABLE READ
BEGIN TRANSACTION	BEGIN TRANSACTION	None	None
SET TRANSACTION ISOLATION LEVEL REPEATABLE READ;	SET TRANSACTION ISOLATION LEVEL REPEATABLE READ;	None	None
SELECT * FROM employee;	Idle in transaction	None	None

Transaction 1	Transaction 2	SQL Server REPEATABLE READ	Babelfish REPEATABLE READ
`UPDATE employee SET name='A_TXN1' WHERE id=1;`	Idle in transaction	None	None
Idle in transaction	`SELECT * FROM employee WHERE id != 1;`	None	None
Idle in transaction	`SELECT * FROM employee;`	Transaction 2 is blocked until transaction 1 commits.	Transaction 2 proceeds normally.
`COMMIT`	Idle in transaction	None	None
Idle in transaction	`SELECT * FROM employee;`	Update from transaction 1 is visible.	Update from transaction 1 is not visible.
`COMMIT`	Idle in transaction	None	None
Idle in transaction	`SELECT * FROM employee;`	sees the update from transaction 1.	sees the update from transaction 1.

The following table provides details on the write-write blocking behavior when concurrent transactions are executed. It shows observed results when using the `REPEATABLE READ` isolation level in SQL Server compared to the `REPEATABLE READ` Babelfish implementation.

Transaction 1	Transaction 2	SQL Server REPEATABLE READ	Babelfish REPEATABLE READ
`BEGIN TRANSACTION`	`BEGIN TRANSACTION`	None	None

Transaction 1	Transaction 2	SQL Server REPEATABLE READ	Babelfish REPEATABLE READ
`SET TRANSACTION ISOLATION LEVEL REPEATABLE READ;`	`SET TRANSACTION ISOLATION LEVEL REPEATABLE READ;`	None	None
`UPDATE employee SET name='A_TXN1' WHERE id=1;`	Idle in transaction	None	None
Idle in transaction	`UPDATE employee SET name='A_TXN2' WHERE id=1;`	Transaction 2 blocked.	Transaction 2 blocked.
`COMMIT`	Idle in transaction	Commit successful and transaction 2 has been unblocked.	Commit successful and transaction 2 fails with error could not serialize access due to concurrent update.
Idle in transaction	`COMMIT`	Commit successful.	Transaction 2 has already been aborted.
Idle in transaction	`SELECT * FROM employee;`	Row with id=1 has name='A_TX2'.	Row with id=1 has name='A_TX1'.

The following table provides details on the phantom reads behavior when concurrent transactions are executed. It shows observed results when using the `REPEATABLE READ` isolation level in SQL Server compared to the `REPEATABLE READ` Babelfish implementation.

Transaction 1	Transaction 2	SQL Server `REPEATABLE READ`	Babelfish `REPEATABLE READ`
`BEGIN TRANSACTION`	`BEGIN TRANSACTION`	None	None
`SET TRANSACTION ISOLATION LEVEL REPEATABLE READ;`	`SET TRANSACTION ISOLATION LEVEL REPEATABLE READ;`	None	None
`SELECT * FROM employee;`	Idle in transaction	None	None
Idle in transaction	`INSERT INTO employee VALUES (4, 'NewRowName', 20);`	Transaction 2 proceeds without any blocking.	Transaction 2 proceeds without any blocking.
Idle in transaction	`SELECT * FROM employee;`	Newly inserted row is visible.	Newly inserted row is visible.
Idle in transaction	`COMMIT`	None	None
`SELECT * FROM employee;`	Idle in transaction	New row inserted by transaction 2 is visible.	New row inserted by transaction 2 is not visible.
`COMMIT`	Idle in transaction	None	None
`SELECT * FROM employee;`	Idle in transaction	Newly inserted row is visible.	Newly inserted row is visible.

The following table provides details when concurrent transactions are executed and the different final results when using the `REPEATABLE READ` isolation level in SQL Server compared to the `REPEATABLE READ` Babelfish implementation.

Transaction 1	Transaction 2	SQL Server `REPEATABLE READ`	Babelfish `REPEATABLE READ`
`BEGIN TRANSACTION`	`BEGIN TRANSACTION`	None	None
`SET TRANSACTION ISOLATION LEVEL REPEATABLE READ;`	`SET TRANSACTION ISOLATION LEVEL REPEATABLE READ;`	None	None
`UPDATE employee SET age = 100 WHERE age IN (SELECT MIN(age) FROM employee);`	Idle in transaction	Transaction 1 updates row with id 1.	Transaction 1 updates row with id 1.
Idle in transaction	`UPDATE employee SET age = 0 WHERE age IN (SELECT MAX(age) FROM employee);`	Transaction 2 is blocked since the SELECT statement tries to read rows locked by UPDATE query in transaction 1.	Transaction 2 proceeds without any blocking since read is never blocked, SELECT statement executes and finally row with id = 3 is updated since transaction 1 changes are not visible yet.
Idle in transaction	`SELECT * FROM employee;`	This step is executed after transaction 1 has committed. Row with id = 1 is updated by transaction 2 in previous step and is visible here.	Row with id = 3 is updated by Transaction 2.

Transaction 1	Transaction 2	SQL Server `REPEATABLE READ`	Babelfish `REPEATABLE READ`
`COMMIT`	Idle in transaction	Transaction 2 is now unblocked.	Commit successful.
Idle in transaction	`COMMIT`	None	None
`SELECT * FROM employee;`	Idle in transaction	Both transaction execute update on row with id = 1.	Different rows are updated by transacti on 1 and 2.

Babelfish `SERIALIZABLE` compared with SQL Server `SERIALIZABLE` isolation level

The following table provides details on the range locks when concurrent transactions are executed. It shows observed results when using the `SERIALIZABLE` isolation level in SQL Server compared to the `SERIALIZABLE` Babelfish implementation.

Transaction 1	Transaction 2	SQL Server `SERIALIZABLE`	Babelfish `SERIALIZABLE`
`BEGIN TRANSACTI ON`	`BEGIN TRANSACTI ON`	None	None
`SET TRANSACTION ISOLATION LEVEL SERILAIZABLE;`	`SET TRANSACTION ISOLATION LEVEL SERILAIZABLE;`	None	None
`SELECT * FROM employee;`	Idle in transaction	None	None
Idle in transaction	`INSERT INTO employee VALUES (4, 'D', 35);`	Transaction 2 is blocked until transaction 1 commits.	Transaction 2 proceeds without any blocking.
Idle in transaction	`SELECT * FROM employee;`	None	None

Transaction 1	Transaction 2	SQL Server SERIALIZABLE	Babelfish SERIALIZABLE
COMMIT	Idle in transaction	Transaction 1 commits successfully. Transaction 2 is now unblocked.	Transaction 1 commits successfully.
Idle in transaction	COMMIT	None	None
SELECT * FROM employee;	Idle in transaction	Newly inserted row is visible.	Newly inserted row is visible.

The following table provides details when concurrent transactions are executed and the different final results when using the SERIALIZABLE isolation level in SQL Server compared to the SERIALIZABLE Babelfish implementation.

Transaction 1	Transaction 2	SQL Server SERIALIZABLE	Babelfish SERIALIZABLE
BEGIN TRANSACTION	BEGIN TRANSACTION	None	None
SET TRANSACTION ISOLATION LEVEL SERILAIZABLE;	SET TRANSACTION ISOLATION LEVEL SERILAIZABLE;	None	None
Idle in transaction	INSERT INTO employee VALUES (4, 'D', 40);	None	None
UPDATE employee SET age =99 WHERE id = 4;	Idle in transaction	Transaction 1 is blocked until transaction 2 commits.	Transaction 1 proceeds without any blocking.
Idle in transaction	COMMIT	Transaction 2 commits successfully.	Transaction 2 commits successfully.

Transaction 1	Transaction 2	SQL Server SERIALIZABLE	Babelfish SERIALIZABLE
		Transaction 1 is now unblocked.	
COMMIT	Idle in transaction	None	None
SELECT * FROM employee;	Idle in transaction	Newly inserted row is visible with age value = 99.	Newly inserted row is visible with age value = 40.

The following table provides details when you INSERT into a table with unique constraint. It shows observed results when using the SERIALIZABLE isolation level in SQL Server compared to the SERIALIZABLE Babelfish implementation.

Transaction 1	Transaction 2	SQL Server SERIALIZABLE	Babelfish SERIALIZABLE
BEGIN TRANSACTION	BEGIN TRANSACTION	None	None
SET TRANSACTION ISOLATION LEVEL SERILAIZABLE;	SET TRANSACTION ISOLATION LEVEL SERILAIZABLE;	None	None
Idle in transaction	INSERT INTO employee VALUES (4, 'D', 40);	None	None
INSERT INTO employee VALUES ((SELECT MAX(id)+1 FROM employee), 'E', 50);	Idle in transaction	Transaction 1 is blocked until transaction 2 commits.	Transaction 1 is blocked until transaction 2 commits.

Transaction 1	Transaction 2	SQL Server `SERIALIZABLE`	Babelfish `SERIALIZABLE`
Idle in transaction	`COMMIT`	Transaction 2 commits successfully. Transaction 1 is now unblocked.	Transaction 2 commits successfully. Transaction 1 aborted with error duplicate key value violates unique constraint.
`COMMIT`	Idle in transaction	Transaction 1 commits successfully.	Transaction 1 commits fails with could not serialize access due to read or write dependencies among transactions.
`SELECT * FROM employee;`	Idle in transaction	row (5, 'E', 50) is inserted.	Only 4 rows exists.

In Babelfish, concurrent transactions running with Isolation Level serializable will fail with serialization anomaly error if the execution of these transaction is inconsistent with all possible serial (one at a time) executions of those transactions.

The following tables provides details on serialization anomaly when concurrent transactions are executed. It shows observed results when using the `SERIALIZABLE` isolation level in SQL Server compared to the `SERIALIZABLE` Babelfish implementation.

Transaction 1	Transaction 2	SQL Server `SERIALIZABLE`	Babelfish `SERIALIZABLE`
`BEGIN TRANSACTION`	`BEGIN TRANSACTION`	None	None
`SET TRANSACTION ISOLATION LEVEL SERILAIZABLE;`	`SET TRANSACTION ISOLATION LEVEL SERILAIZABLE;`	None	None

Transaction 1	Transaction 2	SQL Server `SERIALIZABLE`	Babelfish `SERIALIZABLE`
`SELECT * FROM employee;`	Idle in transaction	None	None
`UPDATE employee SET age=5 WHERE age=10;`	Idle in transaction	None	None
Idle in transaction	`SELECT * FROM employee;`	Transaction 2 is blocked until transaction 1 commits.	Transaction 2 proceeds without any blocking.
Idle in transaction	`UPDATE employee SET age=35 WHERE age=30;`	None	None
`COMMIT`	Idle in transaction	Transaction 1 commits successfully.	Transaction 1 is committed first and is able to commit successfully.
Idle in transaction	`COMMIT`	Transaction 2 commits successfully.	Transaction 2 commit fails with serializa tion error, the whole transaction has been rolled back. Retry transaction 2.
`SELECT * FROM employee;`	Idle in transaction	Changes from both transactions are visible.	Transaction 2 was rolled back. Only transaction 1 changes are seen.

In Babelfish, serialization anomaly is only possible if all the concurrent transactions are executing at isolation level `SERIALIZABLE`. In the following table, lets take the above example but set transaction 2 to isolation level `REPEATABLE READ` instead.

Transaction 1	Transaction 2	SQL Server isolation levels	Babelfish isolation levels
`BEGIN TRANSACTION`	`BEGIN TRANSACTION`	None	None
`SET TRANSACTION ISOLATION LEVEL SERILAIZABLE;`	`SET TRANSACTION ISOLATION LEVEL REPEATABLE READ;`	None	None
`SELECT * FROM employee;`	Idle in transaction	None	None
`UPDATE employee SET age=5 WHERE age=10;`	Idle in transaction	None	None
Idle in transaction	`SELECT * FROM employee;`	Transaction 2 is blocked until transaction 1 commits.	Transaction 2 proceeds without any blocking.
Idle in transaction	`UPDATE employee SET age=35 WHERE age=30;`	None	None
`COMMIT`	Idle in transaction	Transaction 1 commits successfully.	Transaction 1 commits successfully.
Idle in transaction	`COMMIT`	Transaction 2 commits successfully.	Transaction 2 commits successfully.

Transaction 1	Transaction 2	SQL Server isolation levels	Babelfish isolation levels
`SELECT * FROM employee;`	Idle in transaction	Changes from both transactions are visible.	Changes from both transactions are visible.

Using Babelfish features with limited implementation

Each new version of Babelfish adds support for features that better align with T-SQL functionality and behavior. Still, there are some unsupported features and differences in the current implementation. In the following, you can find information about functional differences between Babelfish and T-SQL, with some workarounds or usage notes.

As of version 1.2.0 of Babelfish, the following features currently have limited implementations:

- **SQL Server catalogs (system views)** – The catalogs `sys.sysconfigures`, `sys.syscurconfigs`, and `sys.configurations` support a single read-only configuration only. The `sp_configure` isn't currently supported. For more information about the other SQL Server views implemented by Babelfish, see Getting information from the Babelfish system catalog.
- **GRANT permissions** – GRANT…TO PUBLIC is supported, but GRANT..TO PUBLIC WITH GRANT OPTION is not currently supported.
- **SQL Server *ownership chain* and permission mechanism limitation** – In Babelfish, the SQL Server ownership chain works for views but not for stored procedures. This means that procedures must be granted explicit access to other objects owned by the same owner as the calling procedures. In SQL Server, granting the caller EXECUTE permissions on the procedure is sufficient to call other objects owned by same owner. In Babelfish, caller must also be granted permissions on the objects accessed by the procedure.
- **Resolution of unqualified (without schema name) object references** – When a SQL object (procedure, view, function or trigger) references an object without qualifying it with a schema name, SQL Server resolves the object's schema name by using the schema name of the SQL object in which the reference occurs. Currently, Babelfish resolves this differently, by using the default schema of the database user executing the procedure.
- **Default schema changes, sessions, and connections** – If users change their default schema with `ALTER USER...WITH DEFAULT SCHEMA`, the change takes effect immediately in that session.

However, for other currently connected sessions belonging to the same user, the timing differs, as follows:

- For SQL Server: – The change takes effect across all other connections for this user immediately.
- For Babelfish: – The change takes effect for this user for new connections only.

- **ROWVERSION and TIMESTAMP datatypes implementation and escape hatch setting** – The ROWVERSION and TIMESTAMP datatypes are now supported in Babelfish. To use ROWVERSION or TIMESTAMP in Babelfish, you must change the setting for the escape hatch `babelfishpg_tsql.escape_hatch_rowversion` from its default (strict) to `ignore`. The Babelfish implementation of the ROWVERSION and TIMESTAMP datatypes is mostly semantically identical to SQL Server, with the following exceptions:
  - The built-in @@DBTS function behaves similarly to SQL Server, but with small differences. Rather than returning the last-used value for `SELECT @@DBTS`, Babelfish generates a new timestamp, due to the underlying PostgreSQL database engine and its multi-version concurrency control (MVCC) implementation.
  - In SQL Server, every inserted or updated row gets a unique ROWVERSION/TIMESTAMP value. In Babelfish, every inserted row updated by the same statement is assigned the same ROWVERSION/TIMESTAMP value.

    For example, when an UPDATE statement or INSERT-SELECT statement affects multiple rows, in SQL Server, the affected rows all have different values in their ROWVERSION/TIMESTAMP column. In Babelfish (PostgreSQL), the rows have the same value.
  - In SQL Server, when you create a new table with SELECT-INTO, you can cast an explicit value (such as NULL) to a to-be-created ROWVERSION/TIMESTAMP column. When you do the same thing in Babelfish, an actual ROWVERSION/TIMESTAMP value is assigned to each row in the new table for you, by Babelfish.

  These minor differences in ROWVERSION/TIMESTAMP datatypes shouldn't have an adverse impact on applications running on Babelfish.
- **TOP N PERCENT clause** – Babelfish provides support for the TOP N PERCENT clause with some limitations. SELECT operations are supported while UPDATE, DELETE and INSERT operations with TOP N PERCENT are not supported. The WITH TIES option and subqueries within the TOP clause are also not supported. When the expression value exceeds 100, behavior differs:
  - For SQL Server – Throws an error.
  - For Babelfish – Treats the value as valid and returns results.

- **Schema creation, ownership, and permissions** – Permissions to create and access objects in a schema owned by a non-DBO user (using `CREATE SCHEMA` *`schema name`* `AUTHORIZATION` *`user name`*) differ for SQL Server and Babelfish non-DBO users, as shown in the following table:

Database user (non-DBO) who owns the schema can do the following:	SQL Server	Babelfish
Create objects in the schema without additional grants by the DBO?	No	Yes
Access objects created by DBO in the schema without additional grants?	Yes	No

- **CREATE OR ALTER VIEW / ALTER VIEW syntax** – The support for these syntax in Babelfish has the following limitations:
  - These statements cannot be used on views that have an INSTEAD-OF trigger attached.
  - These statements cannot be used on views that have another view based on this view.

Improving Babelfish query performance

You can achieve faster query processing in Babelfish using query hints and the PostgreSQL optimizer.

Topics

- Using explain plan to improve Babelfish query performance
- Using T-SQL query hints to improve Babelfish query performance
- Using ANTLR parse cache in Babelfish

You can also improve the query performance using `sp_babelfish_volatility` procedure. For more information, see sp_babelfish_volatility.

You can also improve the query performance using subquery transformation and subquery cache. For more information, see Optimizing correlated subqueries in Aurora PostgreSQL.

Using explain plan to improve Babelfish query performance

Starting with version 2.1.0, Babelfish includes two functions that transparently use the PostgreSQL optimizer to generate estimated and actual query plans for T-SQL queries on the TDS port. These functions are similar to using SET STATISTICS PROFILE or SET SHOWPLAN_ALL with SQL Server databases to identify and improve slow running queries.

> **Note**
>
> Getting query plans from functions, control flows, and cursors isn't currently supported.

In the table you can find a comparison of query plan explain functions across SQL Server, Babelfish, and PostgreSQL.

SQL Server	Babelfish	PostgreSQL
SHOWPLAN_ALL	BABELFISH_SHOWPLAN_ALL	EXPLAIN
STATISTICS PROFILE	BABELFISH_STATISTICS PROFILE	EXPLAIN ANALYZE
Uses the SQL Server optimizer	Uses the PostgreSQL optimizer	Uses the PostgreSQL optimizer
SQL Server input and output format	SQL Server input and PostgreSQL output format	PostgreSQL input and output format
Set for the session	Set for the session	Apply to a specific statement
Supports the following: • SELECT • INSERT • UPDATE • DELETE • CURSOR • CREATE	Supports the following: • SELECT • INSERT • UPDATE • DELETE • CREATE • EXECUTE	Supports the following: • SELECT • INSERT • UPDATE • DELETE • CURSOR • CREATE

SQL Server	Babelfish	PostgreSQL
• EXECUTE • EXEC and functions, including control flow (CASE, WHILE-BREAK-CONTINUE, WAITFOR, BEGIN-END, IF-ELSE, and so on)	• EXEC • RAISEERROR • THROW • PRINT • USE	• EXECUTE

Use the Babelfish functions as follows:

- SET BABELFISH_SHOWPLAN_ALL [ON|OFF] – Set to ON to generate an estimated query execution plan. This function implements the behavior of the PostgreSQL `EXPLAIN` command. Use this command to obtain the explain plan for given query.
- SET BABELFISH_STATISTICS PROFILE [ON|OFF] – Set to ON for actual query execution plans. This function implements the behavior of PostgreSQL's `EXPLAIN ANALYZE` command.

For more information about PostgreSQL `EXPLAIN` and `EXPLAIN ANALYZE` see EXPLAIN in the PostgreSQL documentation.

> **Note**
>
> Starting with version 2.2.0, you can set the `escape_hatch_showplan_all` parameter to *ignore* in order to avoid the use of *BABELFISH_* prefix in the SQL Server syntax for `SHOWPLAN_ALL` and `STATISTICS PROFILE` SET commands.

For example, the following command sequence turns on query planning and then returns an estimated query execution plan for the SELECT statement without running the query. This example uses the SQL Server sample `northwind` database using the `sqlcmd` command-line tool to query the TDS port:

```
1> SET BABELFISH_SHOWPLAN_ALL ON
2> GO
1> SELECT t.territoryid, e.employeeid FROM
```

```
2> dbo.employeeterritories e, dbo.territories t
3> WHERE e.territoryid=e.territoryid ORDER BY t.territoryid;
4> GO

QUERY PLAN


------------------------------------------------------------------------------


Query Text: SELECT t.territoryid, e.employeeid FROM
dbo.employeeterritories e, dbo.territories t
WHERE e.territoryid=e.territoryid ORDER BY t.territoryid
Sort  (cost=6231.74..6399.22 rows=66992 width=10)
  Sort Key: t.territoryid NULLS FIRST
  ->  Nested Loop  (cost=0.00..861.76 rows=66992 width=10)
        ->  Seq Scan on employeeterritories e  (cost=0.00..22.70 rows=1264 width=4)
              Filter: ((territoryid)::"varchar" IS NOT NULL)
        ->  Materialize  (cost=0.00..1.79 rows=53 width=6)
              ->  Seq Scan on territories t  (cost=0.00..1.53 rows=53 width=6)
```

When you finish reviewing and adjusting your query, you turn off the function as shown following:

```
1> SET BABELFISH_SHOWPLAN_ALL OFF
```

With BABELFISH_STATISTICS PROFILE set to ON, each executed query returns its regular result set followed by an additional result set that shows actual query execution plans. Babelfish generates the query plan that provides the fastest result set when it invokes the SELECT statement.

```
1> SET BABELFISH_STATISTICS PROFILE ON
1>
2> GO
1> SELECT e.employeeid, t.territoryid FROM
2> dbo.employeeterritories e, dbo.territories t
3> WHERE t.territoryid=e.territoryid ORDER BY t.territoryid;
4> GO
```

The result set and the query plan are returned (this example shows only the query plan).

```
QUERY PLAN


```

```
------------------------------------------------------------------------
Query Text: SELECT e.employeeid, t.territoryid FROM
dbo.employeeterritories e, dbo.territories t
WHERE t.territoryid=e.territoryid ORDER BY t.territoryid
Sort  (cost=42.44..43.28 rows=337 width=10)
  Sort Key: t.territoryid NULLS FIRST


  ->  Hash Join  (cost=2.19..28.29 rows=337 width=10)
       Hash Cond: ((e.territoryid)::"varchar" = (t.territoryid)::"varchar")
        ->  Seq Scan on employeeterritories e  (cost=0.00..22.70 rows=1270 width=36)
        ->  Hash  (cost=1.53..1.53 rows=53 width=6)
             ->  Seq Scan on territories t  (cost=0.00..1.53 rows=53 width=6)
```

To learn more about how to analyze your queries and the results returned by the PostgreSQL optimizer, see explain.depesz.com. For more information about PostgreSQL EXPLAIN and EXPLAIN ANALYZE, see EXPLAIN in the PostgreSQL documentation.

Parameters that control Babelfish explain options

You can use the parameters shown in the following table to control the type of information that's displayed by your query plan.

Parameter	Description
babelfishpg_tsql.explain_buffers	A boolean that turns on (and off) buffer usage information for the optimizer. (Default: off) (Allowable: off, on)
babelfishpg_tsql.explain_costs	A boolean that turns on (and off) estimated startup and total cost information for the optimizer. (Default: on) (Allowable: off, on)
babelfishpg_tsql.explain_format	Specifies the output format for the EXPLAIN plan. (Default: text) (Allowable: text, xml, json, yaml)
babelfishpg_tsql.explain_settings	A boolean that turns on (or off) the inclusion of information about configuration parameter

Parameter	Description
	s in the EXPLAIN plan output. (Default: off) (Allowable: off, on)
babelfishpg_tsql.explain_summary	A boolean that turns on (or off) summary information such as total time after the query plan. (Default: on) (Allowable: off, on)
babelfishpg_tsql.explain_timing	A boolean that turns on (or off) actual startup time and time spent in each node in the output. (Default: on) (Allowable: off, on)
babelfishpg_tsql.explain_verbose	A boolean that turns on (or off) the most detailed version of an explain plan. (Default: off) (Allowable: off, on)
babelfishpg_tsql.explain_wal	A boolean that turns on (or off) generation of WAL record information as part of an explain plan. (Default: off) (Allowable: off, on)

You can check the values of any Babelfish-related parameters on your system by using either PostgreSQL client or SQL Server client. Run the following command to get your current parameter values:

```
1> execute sp_babelfish_configure '%explain%';
2> GO
```

In the following output, you can see that all settings on this particular Babelfish DB cluster are at their default values. Not all output is shown in this example.

```
            name                    setting                     short_desc
--------------------------------- --------
 ---------------------------------------------------------
babelfishpg_tsql.explain_buffers   off      Include information on buffer usage
babelfishpg_tsql.explain_costs     on       Include information on estimated startup
 and total cost
```

```
babelfishpg_tsql.explain_format    text     Specify the output format, which can be
 TEXT, XML, JSON, or YAML
babelfishpg_tsql.explain_settings  off      Include information on configuration
 parameters
babelfishpg_tsql.explain_summary   on       Include summary information (e.g.,totaled
 timing information) after the query plan
babelfishpg_tsql.explain_timing    on       Include actual startup time and time spent
 in each node in the output
babelfishpg_tsql.explain_verbose   off      Display additional information regarding
 the plan
babelfishpg_tsql.explain_wal       off      Include information on WAL record
 generation

(8 rows affected)
```

You can change the setting for these parameters using `sp_babelfish_configure`, as shown in the following example.

```
1> execute sp_babelfish_configure 'explain_verbose', 'on';
2> GO
```

If you want make the setting permanent on a cluster-wide level, include the keyword *server*, as shown in the following example.

```
1> execute sp_babelfish_configure 'explain_verbose', 'on', 'server';
2> GO
```

Using T-SQL query hints to improve Babelfish query performance

Starting with version 2.3.0, Babelfish supports the use of query hints using `pg_hint_plan`. In Aurora PostgreSQL, `pg_hint_plan` is installed by default. For more information about the PostgreSQL extension `pg_hint_plan`, see https://github.com/ossc-db/pg_hint_plan. For details about the version of this extension supported by Aurora PostgreSQL, see Extension versions for Amazon Aurora PostgreSQL in *Release Notes for Aurora PostgreSQL*.

The query optimizer is well-designed to find the optimal execution plan for a SQL statement. When selecting a plan, the query optimizer considers both the engine's cost model, and column and table statistics. However, the suggested plan might not meet the needs of your datasets. Thus, query hints addresses the performance issues to improve execution plans. A `query hint` is syntax added to the SQL standard that instructs the database engine about how to execute the query. For

example, a hint may instruct the engine to follow a sequential scan and override any plan that the query optimizer had selected.

Turning on T-SQL query hints in Babelfish

Currently, Babelfish ignores all T-SQL hints by default. To apply T-SQL hints, run the command `sp_babelfish_configure` with the enable_pg_hint value as ON.

```
EXECUTE sp_babelfish_configure 'enable_pg_hint', 'on' [, 'server']
```

You can make the settings permanent on a cluster-wide level by including the *server* keyword. To configure the setting for the current session only, don't use server.

After `enable_pg_hint` is ON, Babelfish applies the following T-SQL hints.

- INDEX hints
- JOIN hints
- FORCE ORDER hint
- MAXDOP hint

For example, the following command sequence turns on `pg_hint_plan`.

```
1> CREATE TABLE t1 (a1 INT PRIMARY KEY, b1 INT);
2> CREATE TABLE t2 (a2 INT PRIMARY KEY, b2 INT);
3> GO
1> EXECUTE sp_babelfish_configure 'enable_pg_hint', 'on';
2> GO
1> SET BABELFISH_SHOWPLAN_ALL ON;
2> GO
1> SELECT * FROM t1 JOIN t2 ON t1.a1 = t2.a2; --NO HINTS (HASH JOIN)
2> GO
```

No hint is applied to the SELECT statement. The query plan with no hint is returned.

```
QUERY PLAN


------------------------------------------------------------------------
Query Text: SELECT * FROM t1 JOIN t2 ON t1.a1 = t2.a2
```

```
Hash Join (cost=60.85..99.39 rows=2260 width=16)
 Hash Cond: (t1.a1 = t2.a2)
 -> Seq Scan on t1 (cost=0.00..32.60 rows=2260 width=8)
 -> Hash (cost=32.60..32.60 rows=2260 width=8)
 -> Seq Scan on t2 (cost=0.00..32.60 rows=2260 width=8)
```

```
1> SELECT * FROM t1 INNER MERGE JOIN t2 ON t1.a1 = t2.a2;
2> GO
```

The query hint is applied to the SELECT statement. The following output shows that the query plan with merge join is returned.

```
QUERY PLAN


------------------------------------------------------------------------------
Query Text: SELECT/*+ MergeJoin(t1 t2) Leading(t1 t2)*/ * FROM t1 INNER JOIN t2 ON
 t1.a1 = t2.a2
Merge Join (cost=0.31..190.01 rows=2260 width=16)
 Merge Cond: (t1.a1 = t2.a2)
 -> Index Scan using t1_pkey on t1 (cost=0.15..78.06 rows=2260 width=8)
 -> Index Scan using t2_pkey on t2 (cost=0.15..78.06 rows=2260 width=8)
```

```
1> SET BABELFISH_SHOWPLAN_ALL OFF;
2> GO
```

Limitations

While using the query hints, consider the following limitations:

- If a query plan is cached before `enable_pg_hint` is turned on, hints won't be applied in the same session. It will be applied in the new session .
- If schema names are explicitly given, then hints can't be applied. You can use table aliases as a workaround.
- A query hint can't be applied to views and sub-queries.
- Hints don't work for UPDATE/DELETE statements with JOINs.

- An index hint for a non-existing index or table is ignored.
- The FORCE ORDER hint doesn't work for HASH JOINs and non-ANSI JOINs.

Using ANTLR parse cache in Babelfish

Starting with Babelfish versions 5.7.0 and 6.2.0, you can use a persistent ANTLR parse result cache for T-SQL stored routines (procedures and functions) to reduce first-execution latency.

With the procedure parse cache:

- Large T-SQL routines (hundreds to thousands of lines) no longer incur full T-SQL parsing overhead on the first execution in every new session.
- The parsed result is serialized once at `CREATE/ALTER` procedure/function time, stored in the catalog, and reused across sessions – emulating SQL Server's system-wide caching behavior.
- The feature is controlled by the session-level GUC `babelfishpg_tsql.enable_antlr_parse_cache`, with optional per-routine overrides through `sys.enable_antlr_parse_cache()`.
- By default the feature is **OFF**.

Performance: For large routines, ANTLR parsing can take up to several seconds. With the ANTLR parse cache, first-execution parse time is reduced to a few milliseconds. Subsequent executions in the same session are served from the in-session cache (sub-millisecond) and are unaffected.

Understanding the ANTLR parse cache

Babelfish must validate T-SQL syntax by parsing a routine's body the first time it runs in a session. This parse result is normally cached only for the lifetime of that session, so every new connection re-parses from scratch. The parse cache persists the parse result in the catalog so that new sessions can reuse it.

How it behaves:

- **At `CREATE/ALTER`** – When caching is enabled, Babelfish parses the routine and stores the serialized parse result in the persistent cache.
- **First execution without a persistent entry** – If no cached entry exists (for example, the routine was created before caching was enabled), Babelfish performs the normal ANTLR parse and populates the persistent cache.

- **First execution in a later session** – Babelfish loads and deserializes the cached parse result instead of re-parsing – this is where the time savings occur.
- **Subsequent executions in the same session** – served from the in-session cache (unchanged behavior).
- If a cached result is missing or was created by a different Babelfish version, Babelfish performs the normal ANTLR parse and repopulates the persistent cache when caching is enabled.
- If Babelfish encounters an error while serializing or deserializing a cached result, the statement fails and returns an error. Disable caching for the affected routine and retry the statement, or retry in a new session with the cache GUC disabled. If the error persists, contact Amazon Support.

Observing the parsing-time improvement

You can measure the effect using `SET BABELFISH_STATISTICS PROFILE ON`, which reports the `Babelfish T-SQL Batch Parsing Time` for each batch. First, create a large procedure with caching enabled to populate the persistent cache. Then compare the procedure's first execution in two separate new sessions: one with caching disabled, which ignores the persistent entry, and one with caching enabled, which reuses it. Alternatively, if caching was not enabled when the procedure was created, execute it in two separate new sessions with caching enabled: the first execution populates the persistent cache, and the second reuses it.

In the following example, first create the procedure with caching ON to populate the persistent cache:

```
-- New session 0: caching ON (at CREATE PROCEDURE time)
SELECT set_config('babelfishpg_tsql.enable_antlr_parse_cache', 'on', false);
GO
CREATE PROCEDURE dbo.updateInformation @region VARCHAR(50)
AS
BEGIN
    ...
END;
GO
```

Next, in a new session with caching OFF (the default), execute the procedure:

```
-- New session 1: caching OFF (default)
SET BABELFISH_STATISTICS PROFILE ON;
GO
```

```
EXEC dbo.updateInformation @region = 'EMEA';   -- first call in this session
GO
```

The statistics profile reports a high parsing time:

```
Babelfish T-SQL Batch Parsing Time: 20359.465 ms
```

Finally, in another new session with caching ON, execute the procedure:

```
-- New session 2: caching ON
SELECT set_config('babelfishpg_tsql.enable_antlr_parse_cache', 'on', false);
GO
SET BABELFISH_STATISTICS PROFILE ON;
GO
EXEC dbo.updateInformation @region = 'EMEA';   -- first call in this session
GO
```

The statistics profile reports a significantly lower parsing time:

```
Babelfish T-SQL Batch Parsing Time: 150.927 ms
```

The first execution in a new session drops from ~20 s of parsing to ~0.15 s once the cached parse tree is reused. Second and later executions within the same session are served from the in-session cache in both cases (sub-millisecond) and are unaffected by the GUC.

Enabling the cache for a session

The feature is controlled by a session-level GUC (default **OFF**):

```
-- Enable parse caching for the current session
SELECT set_config('babelfishpg_tsql.enable_antlr_parse_cache', 'on', false);
GO

-- Disable for the current session
SELECT set_config('babelfishpg_tsql.enable_antlr_parse_cache', 'off', false);
GO
```

Note

- The GUC is **session-scoped** and resets to the default (OFF) when the session ends.

- This GUC is not currently configurable cluster-wide through `sp_babelfish_configure`.

Controlling the cache per routine

You can override the session GUC for an individual routine using `sys.enable_antlr_parse_cache`, which accepts the routine's object id:

```
-- Force caching ON for a specific routine (even if the session GUC is OFF)
SELECT sys.enable_antlr_parse_cache(sys.object_id('dbo.my_proc'), true);
GO

-- Force caching OFF for a specific routine — "kill switch"
-- (clears any cached data and blocks caching even if the session GUC is ON)
SELECT sys.enable_antlr_parse_cache(sys.object_id('dbo.my_proc'), false);
GO

-- Reset to default; the routine follows the session GUC
SELECT sys.enable_antlr_parse_cache(sys.object_id('dbo.my_proc'), NULL);
GO
```

Note

- You must be the **owner** of the routine or a member of the **sysadmin** role to change its cache setting.
- The per-routine setting persists across sessions (it is stored in the catalog) and is preserved across `ALTER`; it is removed when the routine is dropped.

Checking cache statistics

`sys.antlr_parse_cache_stats()` returns parse-cache activity for the current session:

```
SELECT * FROM sys.antlr_parse_cache_stats();
GO
```

The following table describes each column in the output.

Column	Description
cache_hits	Count of routine executions for which a cached parse result was reused.
cache_misses	Count of routine executions for which caching was enabled but no usable cache entry was found.
cache_writes	Count of successful persistent-cache writes.
cache_evictions	Count of cached entries that were invalidated or removed (for example, kill switch or GUC toggle).
cache_errors	Count of serialization or deserialization failures.

Counters are per-session and reset on a new connection.

Example scenario

```
-- Enable caching for this session
SELECT set_config('babelfishpg_tsql.enable_antlr_parse_cache', 'on', false);
GO

CREATE PROCEDURE dbo.report_proc @region VARCHAR(50)
AS
BEGIN
    -- large multi-statement T-SQL body ...
    SELECT @region;
END;
GO

-- First execution in a brand-new session: served from the persistent cache (fast)
EXEC dbo.report_proc @region = 'APAC';
GO

-- Inspect cache activity for this session
SELECT * FROM sys.antlr_parse_cache_stats();
GO

-- Opt this routine out of caching regardless of the session setting
SELECT sys.enable_antlr_parse_cache(sys.object_id('dbo.report_proc'), false);
```

```
GO
```

Upgrade considerations

The ANTLR parse cache behaves as follows across Babelfish version upgrades:

- The ANTLR parse cache is bound to a specific Babelfish version. When the Babelfish version changes, cached parse results are no longer reused. New executions re-parse the routine and repopulate the cache automatically when caching is enabled.
- Existing routines created before 5.7.0 and 6.2.0 are cached on their next `CREATE/ALTER` or on a cold-session execution once caching is enabled.

Important limitations

The following limitations apply to the ANTLR parse cache:

- **Default OFF** – the feature must be explicitly enabled per session (or forced per routine).
- **Connection type** – the cache is active only for **TDS (SQL Server protocol) connections**, not for psql/libpq connections.
- **Not cached** – **triggers, event triggers, and inline table-valued functions (ITVFs)** are not cached in this release.
- **Cluster-wide config** – the session GUC is not currently settable through `sp_babelfish_configure`.

Using Aurora PostgreSQL extensions with Babelfish

Aurora PostgreSQL provides extensions for working with other Amazon services. These are optional extensions that support various use cases, such as using Amazon S3 with your DB cluster for importing or exporting data.

- To import data from an Amazon S3 bucket to your Babelfish DB cluster, you set up the `aws_s3` Aurora PostgreSQL extension. This extension also lets you export data from your Aurora PostgreSQL DB cluster to an Amazon S3 bucket.
- Amazon Lambda is a compute service that lets you run code without provisioning or managing servers. You can use Lambda functions to do things like process event notifications from your DB instance. To learn more about Lambda, see What is Amazon Lambda? in the *Amazon Lambda*

Developer Guide. To invoke Lambda functions from your Babelfish DB cluster, you set up the `aws_lambda` Aurora PostgreSQL extension.

To set up these extensions for your Babelfish cluster, you first need to grant permission to the internal Babelfish user to load the extensions. After granting permission, you can then load Aurora PostgreSQL extensions.

Enabling Aurora PostgreSQL extensions in your Babelfish DB cluster

Before you can load the `aws_s3` or the `aws_lambda` extensions, you grant the needed privileges to your Babelfish DB cluster.

The procedure following uses the `psql` PostgreSQL command line tool to connect to the DB cluster. For more information, see Using psql to connect to the DB cluster. You can also use pgAdmin. For details, see Using pgAdmin to connect to the DB cluster.

This procedure loads both `aws_s3` and `aws_lambda`, one after the other. You don't need to load both if you want to use only one of these extensions. The `aws_commons` extension is required by each, and it's loaded by default as shown in the output.

To set up your Babelfish DB cluster with privileges for the Aurora PostgreSQL extensions

1. Connect to your Babelfish DB cluster. Use the name for the "master" user (-U) that you specified when you created the Babelfish DB cluster. The default (`postgres`) is shown in the examples.

   For Linux, macOS, or Unix:

   ```
   psql -h your-Babelfish.cluster.444455556666-us-east-1.rds.amazonaws.com \
   -U postgres \
   -d babelfish_db \
   -p 5432
   ```

   For Windows:

   ```
   psql -h your-Babelfish.cluster.444455556666-us-east-1.rds.amazonaws.com ^
   -U postgres ^
   -d babelfish_db ^
   -p 5432
   ```

The command responds with a prompt to enter the password for the user name (-U).

```
Password:
```

Enter the password for the user name (-U) for the DB cluster. When you successfully connect, you see output similar to the following.

```
psql (13.4)
SSL connection (protocol: TLSv1.3, cipher: TLS_AES_256_GCM_SHA384, bits: 256,
 compression: off)
Type "help" for help.

postgres=>
```

2. Grant privileges to the internal Babelfish user to create and load extensions.

```
babelfish_db=> GRANT rds_superuser TO master_dbo;
GRANT ROLE
```

3. Create and load the `aws_s3` extension. The `aws_commons` extension is required, and it's installed automatically when the `aws_s3` is installed.

```
babelfish_db=> create extension aws_s3 cascade;
NOTICE:  installing required extension "aws_commons"
CREATE EXTENSION
```

4. Create and load the `aws_lambda` extension.

```
babelfish_db=> create extension aws_lambda cascade;
CREATE EXTENSION
babelfish_db=>
```

Using Babelfish with Amazon S3

If you don't already have an Amazon S3 bucket to use with your Babelfish DB cluster, you can create one. For any Amazon S3 bucket that you want to use, you provide access.

Before trying to import or export data using an Amazon S3 bucket, complete the following one-time steps.

To set up access for your Babelfish DB instance to your Amazon S3 bucket

1. Create an Amazon S3 bucket for your Babelfish instance, if needed. To do so, follow the instructions in Create a bucket in the *Amazon Simple Storage Service User Guideguide-s3-user;*.
2. Upload files to your Amazon S3 bucket. To do so, follow the steps in Add an object to a bucket in the *Amazon Simple Storage Service User Guideguide-s3-user;*.
3. Set up permissions as needed:

   - To import data from Amazon S3, the Babelfish DB cluster needs permission to access the bucket. We recommend using an Amazon Identity and Access Management (IAM) role and attaching an IAM policy to that role for your cluster. To do so, follow the steps in Using an IAM role to access an Amazon S3 bucket.
   - To export data from your Babelfish DB cluster, your cluster must be granted access to the Amazon S3 bucket. As with importing, we recommend using an IAM role and policy. To do so, follow the steps in Setting up access to an Amazon S3 bucket.

You can now use Amazon S3 with the `aws_s3` extension with your Babelfish DB cluster.

To import data from Amazon S3 to Babelfish and to export Babelfish data to Amazon S3

1. Use the `aws_s3` extension with your Babelfish DB cluster.

   When you do, make sure to reference the tables as they exist in the context of PostgreSQL. That is, if you want to import into a Babelfish table named `[database].[schema].[tableA]`, refer to that table as `database_schema_tableA` in the `aws_s3` function:

   - For an example of using an `aws_s3` function to import data, see Importing data from Amazon S3 to your Aurora PostgreSQL DB cluster .
   - For examples of using `aws_s3` functions to export data, see Exporting query data using the aws_s3.query_export_to_s3 function.
2. Make sure to reference Babelfish tables using PostgreSQL naming when using the `aws_s3` extension and Amazon S3, as shown in the following table.

Babelfish table	Aurora PostgreSQL table
database.*schema*.*table*	*database*_*schema*_*table*

To learn more about using Amazon S3 with Aurora PostgreSQL, see Importing data from Amazon S3 into an Aurora PostgreSQL DB cluster and Exporting data from an Aurora PostgreSQL DB cluster to Amazon S3.

Using Babelfish with Amazon Lambda

After the `aws_lambda` extension is loaded in your Babelfish DB cluster but before you can invoke Lambda functions, you give Lambda access to your DB cluster by following this procedure.

To set up access for your Babelfish DB cluster to work with Lambda

This procedure uses the Amazon CLI to create the IAM policy and role, and associate these with the Babelfish DB cluster.

1. Create an IAM policy that allows access to Lambda from your Babelfish DB cluster.

```
aws iam create-policy  --policy-name rds-lambda-policy --policy-document '{
 "Version": "2012-10-17",
    "Statement": [
        {
        "Sid": "AllowAccessToExampleFunction",
        "Effect": "Allow",
        "Action": "lambda:InvokeFunction",
        "Resource": "arn:aws:lambda:aws-region:444455556666:function:my-function"
        }
    ]
}'
```

2. Create an IAM role that the policy can assume at runtime.

```
aws iam create-role  --role-name rds-lambda-role --assume-role-policy-document '{
    "Version": "2012-10-17",
    "Statement": [
        {
        "Effect": "Allow",
        "Principal": {
            "Service": "rds.amazonaws.com"
        },
        "Action": "sts:AssumeRole"
        }
    ]
}'
```

3. Attach the policy to the role.

```
aws iam attach-role-policy \
    --policy-arn arn:aws:iam::444455556666:policy/rds-lambda-policy \
    --role-name rds-lambda-role --region aws-region
```

4. Attach the role to your Babelfish DB cluster

```
aws rds add-role-to-db-cluster \
       --db-cluster-identifier my-cluster-name \
       --feature-name Lambda \
       --role-arn  arn:aws:iam::444455556666:role/rds-lambda-role   \
       --region aws-region
```

After you complete these tasks, you can invoke your Lambda functions. For more information and examples of setting up Amazon Lambda for Aurora PostgreSQL DB cluster with Amazon Lambda, see Step 2: Configure IAM for your Aurora PostgreSQL DB cluster and Amazon Lambda.

To invoke a Lambda function from your Babelfish DB cluster

Amazon Lambda supports functions written in Java, Node.js, Python, Ruby, and other languages. If the function returns text when invoked, you can invoke it from your Babelfish DB cluster. The following example is a placeholder python function that returns a greeting.

```
lambda_function.py
import json
def lambda_handler(event, context):
    #TODO implement
    return {
        'statusCode': 200,
        'body': json.dumps('Hello from Lambda!')
```

Currently, Babelfish doesn't support JSON. If your function returns JSON, you use a wrapper to handle the JSON. For example, say that the `lambda_function.py` shown preceding is stored in Lambda as `my-function`.

1. Connect to your Babelfish DB cluster using the `psql` client (or the pgAdmin client). For more information, see Using psql to connect to the DB cluster.

2. Create the wrapper. This example uses PostgreSQL's procedural language for SQL, PL/pgSQL. To learn more, see PL/pgSQL–SQL Procedural Language.

```
create or replace function master_dbo.lambda_wrapper()
returns text
language plpgsql
as
$$
declare
   r_status_code integer;
   r_payload text;
begin
   SELECT payload INTO r_payload
     FROM aws_lambda.invoke(  aws_commons.create_lambda_function_arn('my-function',
 'us-east-1')
                            ,'{"body": "Hello from Postgres!"}'::json );
   return r_payload ;
end;
$$;
```

The function can now be run from the Babelfish TDS port (1433) or from the PostgreSQL port (5433).

a. To invoke (call) this function from your PostgreSQL port:

```
SELECT * from aws_lambda.invoke(aws_commons.create_lambda_function_arn('my-
function', 'us-east-1'), '{"body": "Hello from Postgres!"}'::json );
```

The output is similar to the following:

```
status_code |                       payload                        |
 executed_version | log_result
-------------+------------------------------------------------------
+------------------+------------
         200 | {"statusCode": 200, "body": "\"Hello from Lambda!\""} | $LATEST
         |
(1 row)
```

b. To invoke (call) this function from the TDS port, connect to the port using the SQL Server `sqlcmd` command line client. For details, see Using a SQL Server client to connect to your DB cluster. When connected, run the following:

```
1> select lambda_wrapper();
2> go
```

The command returns output similar to the following:

```
{"statusCode": 200, "body": "\"Hello from Lambda!\""}
```

To learn more about using Lambda with Aurora PostgreSQL, see Invoking an Amazon Lambda function from an Aurora PostgreSQL DB cluster . For more information about working with Lambda functions, see Getting started with Lambda in the *Amazon Lambda Developer Guide.*

Using pg_stat_statements in Babelfish

Babelfish for Aurora PostgreSQL supports `pg_stat_statements` extension from 3.3.0. To learn more, see pg_stat_statements.

For details about the version of this extension supported by Aurora PostgreSQL, see Extension versions.

Creating pg_stat_statements extension

To turn on `pg_stat_statements`, you must turn on the Query identifier calculation. This is done automatically if `compute_query_id` is set to `on` or `auto` in the parameter group. The default value of `compute_query_id` parameter is `auto`. You also need to create this extension to turn on this feature. Use the following command to install the extension from T-SQL endpoint:

```
1>EXEC sp_execute_postgresql 'CREATE EXTENSION pg_stat_statements WITH SCHEMA sys';
```

You can access the query statistics using the following query:

```
postgres=>select * from pg_stat_statements;
```

> **Note**
>
> During installation, if you don't provide the schema name for the extension then by default it will create it in public schema. To access it, you must use square brackets with schema qualifier as shown below:

```
postgres=>select * from [public].pg_stat_statements;
```

You can also create the extension from PSQL endpoint.

Authorizing the extension

By default, you can see the statistics for queries performed within your T-SQL database without the need of any authorization.

To access query statistics created by others, you need to have `pg_read_all_stats` PostgreSQL role. Follow the steps mentioned below to construct GRANT pg_read_all_stats command.

1. In T-SQL, use the following query that returns the internal PG role name.

   ```
   SELECT rolname FROM pg_roles WHERE oid = USER_ID();
   ```

2. Connect to Babelfish for Aurora PostgreSQL database with rds_superuser privilege and use the following command:

   ```
   GRANT pg_read_all_stats TO <rolname_from_above_query>
   ```

Example

From T-SQL endpoint:

```
1>SELECT rolname FROM pg_roles WHERE oid = USER_ID();
2>go
```

```


rolname
-------
```

```
master_dbo
(1 rows affected)
```

From PSQL endpoint:

```
babelfish_db=# grant pg_read_all_stats to master_dbo;
```

```
GRANT ROLE
```

You can access the query statistics using the pg_stat_statements view:

```
1>create table t1(cola int);
2>go
1>insert into t1 values (1),(2),(3);
2>go
```

```
(3 rows affected)
```

```
1>select userid, dbid, queryid, query from pg_stat_statements;
2>go
```

```
userid dbid queryid             query
------ ---- -------             -----
37503 34582 6487973085327558478 select * from t1
37503 34582 6284378402749466286 SET QUOTED_IDENTIFIER OFF
37503 34582 2864302298511657420 insert into t1 values ($1),($2),($3)
10    34582 NULL                <insufficient privilege>
37503 34582 5615368793313871642 SET TEXTSIZE 4096
37503 34582 639400815330803392  create table t1(cola int)
(6 rows affected)
```

Resetting query statistics

You can use `pg_stat_statements_reset()` to reset the statistics gathered so far by pg_stat_statements. To learn more, see pg_stat_statements. It is currently supported through

PSQL endpoint only. Connect to Babelfish for Aurora PostgreSQL with `rds_superuser` privilege, use the following command:

```
SELECT pg_stat_statements_reset();
```

Limitations

- Currently, `pg_stat_statements()` is not supported through T-SQL endpoint. `pg_stat_statements` view is the recommended way to gather the statistics.
- Some of the queries might be re-written by the T-SQL parser implemented by Aurora PostgreSQL engine, `pg_stat_statements` view will show the re-written query and not the original query.

  Example

  ```
  select next value for [dbo].[newCounter];
  ```

  The above query is re-written as the following in the pg_stat_statements view.

  ```
  select nextval($1);
  ```
- Based on the execution flow of the statements, some of the queries might not be tracked by pg_stat_statements and will not be visible in the view. This includes the following statements: `use dbname`, `goto`, `print`, `raise error`, `set`, `throw`, `declare cursor`.
- For CREATE LOGIN and ALTER LOGIN statements, query and queryid will not be shown. It will show insufficient privileges.
- `pg_stat_statements` view always contains the below two entries, as these are executed internally by `sqlcmd` client.
  - SET QUOTED_IDENTIFIER OFF
  - SET TEXTSIZE 4096

Using pgvector in Babelfish

pgvector, an open-source extension, lets you search for similar data directly within your Postgres database. Babelfish now supports this extension starting with versions 15.6 and 16.2. For more information, pgvector Open source Documentation.

Prerequisites

To enable pgvector functionality, install the extension in sys schema using one of the following methods:

- Run the following command in sqlcmd client:

```
exec sys.sp_execute_postgresql 'CREATE EXTENSION vector WITH SCHEMA sys';
```

- Connect to `babelfish_db` and run the following command in psql client:

```
CREATE EXTENSION vector WITH SCHEMA sys;
```

> **Note**
>
> After installing the pgvector extension, the vector data type will only be available in new database connections you establish. Existing connections won't recognize the new data type.

Supported Functionality

Babelfish extends the T-SQL functionality to support the following:

- **Storing**

  Babelfish now supports vector datatype compatible syntax, enhancing its T-SQL compatibility. To learn more about storing data with pgvector, see Storing.

- **Querying**

  Babelfish expands T-SQL expression support to include vector similarity operators. However, for all other queries, standard T-SQL syntax is still required.

> **Note**
>
> T-SQL doesn't support Array type, and the database drivers do not have any interface to handle them. As a workaround, Babelfish uses text strings (varchar/nvarchar) to store vector data. For example, when you request a vector value [1,2,3], Babelfish will return a

string '[1,2,3]' as the response. You can parse and split this string at application level as per your needs.

To learn more about querying data with pgvector, see Querying.

- **Indexing**

  T-SQL `Create Index` now supports `USING INDEX_METHOD` syntax. You can now define similarity search operator to be used on a specific column when creating an index.

  The grammar is also extended to support Vector similarity operations on the required column (Check column_name_list_with_order_for_vector grammar).

```
CREATE [UNIQUE] [clustered] [COLUMNSTORE] INDEX <index_name> ON <table_name> [USING
 vector_index_method] (<column_name_list_with_order_for_vector>)
Where column_name_list_with_order_for_vector is:
    <column_name> [ASC | DESC] [VECTOR_COSINE_OPS | VECTOR_IP_OPS | VECTOR_L2_OPS]
 (COMMA simple_column_name [ASC | DESC] [VECTOR_COSINE_OPS | VECTOR_IP_OPS |
 VECTOR_L2_OPS])
```

  To learn more about indexing data with pgvector, see Indexing.

- **Performance**
  - Use `SET BABELFISH_STATISTICS PROFILE ON` to debug Query Plans from T-SQL endpoint.
  - Increase `max_parallel_workers_get_gather` using the `set_config` function supported in T-SQL.
  - Use `IVFFlat` for approximate searches. For more information, see IVFFlat.

  To improve performance with pgvector, see Performance.

Limitations

- Babelfish doesn't support Full Text Search for Hybrid Search. For more information, see Hybrid Search.
- Babelfish doesn't currently support re-indexing functionality. However, you can still use PostgreSQL endpoint to re-index. For more information, see Vacuuming.

Using Amazon Aurora machine learning with Babelfish

You can extend the capabilities of your Babelfish for Aurora PostgreSQL DB cluster by integrating it with Amazon Aurora machine learning. This seamless integration grants you access to a range of powerful services like Amazon Comprehend or Amazon SageMaker AI or Amazon Bedrock, each tailored to address distinct machine learning needs.

As a Babelfish user, you can use existing knowledge of T-SQL syntax and semantics when working with Aurora machine learning. Follow the instructions provided in the Amazon documentation for Aurora PostgreSQL. For more information, see Using Amazon Aurora machine learning with Aurora PostgreSQL.

Prerequisites

- Before trying to set up your Babelfish for Aurora PostgreSQL DB cluster to use Aurora machine learning, you must understand the related requirements and prerequisites. For more information, see Requirements for using Aurora machine learning with Aurora PostgreSQL.
- Make sure you install the `aws_ml` extension either using Postgres endpoint or the `sp_execute_postgresql` store procedure.

```
exec sys.sp_execute_postgresql 'Create Extension aws_ml'
```

> **Note**
>
> Currently Babelfish doesn't support cascade operations with `sp_execute_postgresql` in Babelfish. Since `aws_ml` relies on `aws_commons`, you'll need to install it separately using Postgres endpoint.

```
create extension aws_common;
```

Handling T-SQL syntax and semantics with `aws_ml` functions

The following examples explains how T-SQL syntax and semantics are applied to the Amazon ML services:

Example: aws_bedrock.invoke_model – A simple query using Amazon Bedrock functions

```
aws_bedrock.invoke_model(
   model_id      varchar,
   content_type  text,
   accept_type   text,
   model_input   text)
Returns Varchar(MAX)
```

The following example shows how to invoke a Anthropic Claude 2 model for Bedrock using invoke_model.

```
SELECT aws_bedrock.invoke_model (
    'anthropic.claude-v2', -- model_id
    'application/json', -- content_type
    'application/json', -- accept_type
    '{"prompt": "\n\nHuman:
    You are a helpful assistant that answers questions directly
    and only using the information provided in the context below.
    \nDescribe the answerin detail.\n\nContext: %s \n\nQuestion:
    %s \n\nAssistant:","max_tokens_to_sample":4096,"temperature"
    :0.5,"top_k":250,"top_p":0.5,"stop_sequences":[]}' -- model_input
);
```

Example: aws_comprehend.detect_sentiment – A simple query using Amazon Comprehend functions

```
aws_comprehend.detect_sentiment(
   input_text varchar,
   language_code varchar,
   max_rows_per_batch int)
Returns table (sentiment varchar, confidence real)
```

The following example shows how to invoke the Amazon Comprehend service.

```
select sentiment from aws_comprehend.detect_sentiment('This is great', 'en');
```

Example: aws_sagemaker.invoke_endpoint – A simple query using Amazon SageMaker functions

```
aws_sagemaker.invoke_endpoint(
  endpoint_name varchar,
  max_rows_per_batch int,
  VARIADIC model_input "any") -- Babelfish inherits PG's variadic parameter type
Rerurns Varchar(MAX)
```

Since model_input is marked as VARIADIC and of type “any”, users can pass a list of any length and any datatype to the function which will act as the input the input to the model. The following example shows how to invoke the Amazon SageMaker service.

```
SELECT CAST (aws_sagemaker.invoke_endpoint(
    'sagemaker_model_endpoint_name',
    NULL,
    arg1, arg2 -- model inputs are separate arguments )
AS INT) -- cast the output to INT
```

For more detailed information on using Aurora machine learning with Aurora PostgreSQL, see Using Amazon Aurora machine learning with Aurora PostgreSQL.

Limitations

- While Babelfish doesn't allow creating arrays, it can still handle data that represents arrays. When you use functions like `aws_bedrock.invoke_model_get_embeddings` that return arrays, the results is delivered as a string containing the array elements.

Babelfish supports linked servers

Babelfish for Aurora PostgreSQL supports linked servers by using the PostgreSQL `tds_fdw` extension in version 3.1.0. To work with linked servers, you must install the `tds_fdw` extension. For more information about the `tds_fdw` extension, see Working with the supported foreign data wrappers for Amazon Aurora PostgreSQL.

Installing the tds_fdw extension

You can install tds_fdw extension using the following methods.

Using CREATE EXTENSION from PostgreSQL endpoint

1. Connect to your PostgreSQL DB instance on the Babelfish database in the PostgreSQL port. Use an account that has the rds_superuser role.

```
psql --host=your-DB-instance.aws-region.rds.amazonaws.com --port=5432 --
username=test --dbname=babelfish_db --password
```

2. Install the tds_fdw extension. This is a one-time installation process. You don't need to reinstall when the DB cluster restarts.

```
babelfish_db=> CREATE EXTENSION tds_fdw;
CREATE EXTENSION
```

Calling sp_execute_postgresql stored procedure from TDS endpoint

Babelfish supports installing tds_fdw extension by calling sp_execute_postgresql procedure from version 3.3.0. You can execute PostgreSQL statements from T-SQL endpoint without exiting the T-SQL port. For more information, see Working with Babelfish for Aurora PostgreSQL procedures

1. Connect to your PostgreSQL DB instance on the Babelfish database in the T-SQL port.

```
sqlcmd -S your-DB-instance.aws-region.rds.amazonaws.com -U test -P password
```

2. Install the tds_fdw extension.

```
1>EXEC sp_execute_postgresql N'CREATE EXTENSION tds_fdw';
2>go
```

Supported functionality

Babelfish supports adding remote RDS for SQL Server or Babelfish for Aurora PostgreSQL endpoints as the linked server. You can also add other remote SQL Server instances as linked

servers. Then, use `OPENQUERY( )` to retrieve data from these linked servers. Starting from Babelfish version 3.2.0, four-part names are also supported.

The following stored procedures and catalog views are supported in order to use the linked servers.

Stored procedures

- **sp_addlinkedserver** – Babelfish doesn't support the `@provstr` parameter.
- **sp_addlinkedsrvlogin**
  - You must provide an explicit remote username and password to connect to the remote data source. You can't connect with the user's self credentials. Babelfish supports only `@useself = false`.
  - Babelfish doesn't support the `@locallogin` parameter since configuring remote server access specific to local login isn't supported.
- **sp_linkedservers**
- **sp_helplinkedsrvlogin**
- **sp_dropserver**
- **sp_droplinkedsrvlogin** – Babelfish doesn't support the `@locallogin` parameter since configuring remote server access specific to local login isn't supported.
- **sp_serveroption** – Babelfish supports the following server options:
  - query timeout (from Babelfish version 3.2.0)
  - connect timeout (from Babelfish version 3.3.0)
- **sp_testlinkedserver** (from Babelfish version 3.3.0)
- **sp_enum_oledb_providers** (from Babelfish version 3.3.0)

Catalog views

- **sys.servers**
- **sys.linked_logins**

Using encryption in transit for the connection

The connection from the source Babelfish for Aurora PostgreSQL server to the target remote server uses encryption in transit (TLS/SSL), depending on the remote server database configuration. If

the remote server isn't configured for encryption, the Babelfish server making the request to the remote database falls back to unencrypted.

To enforce connection encryption

- If the target linked server is an RDS for SQL Server instance, set `rds.force_ssl = on` for the target SQL Server instance. For more information about SSL/TLS configuration for RDS for SQL Server, see Using SSL with a Microsoft SQL Server DB instance
- If the target linked server is a Babelfish for Aurora PostgreSQL cluster, set `babelfishpg_tds.tds_ssl_encrypt = on` and `ssl = on` for the target server. For more information about SSL/TLS, see Babelfish SSL settings and client connections.

Adding Babelfish as a linked server from SQL Server

Babelfish for Aurora PostgreSQL can be added as a linked server from a SQL Server. On a SQL Server database, you can add Babelfish as a linked server using Microsoft OLE DB provider for ODBC : MSDASQL.

There are two ways to configure Babelfish as a linked server from SQL Server using MSDASQL provider:

- Providing ODBC connection string as the provider string.
- Provide the System DSN of ODBC data source while adding the linked server.

Limitations

- OPENQUERY() works only for SELECT and doesn't work for DML.
- Four-part object names work only for reading and doesn't work for modifying the remote table. An UPDATE can reference a remote table in the FROM clause without modifying it.
- Executing stored procedures against Babelfish linked servers isn't supported.
- Babelfish major version upgrade might not work if there are objects dependent on `OPENQUERY()` or objects referenced through four-part names. You must ensure that any objects referencing `OPENQUERY()` or four-part names are dropped before a major version upgrade.
- The following datatypes don't work as expected against remote Babelfish server: `nvarchar(max)`, `varchar(max)`, `varbinary(max)`, `binary(max)` and `time`. We recommend using the CAST function to convert these to the supported datatypes.

Example

In the following example, a Babelfish for Aurora PostgreSQL instance is connecting to an instance of RDS for SQL Server in the cloud.

```
EXEC master.dbo.sp_addlinkedserver @server=N'rds_sqlserver', @srvproduct=N'',
 @provider=N'SQLNCLI', @datasrc=N'myserver.CB2XKFSFFMY7.US-WEST-2.RDS.AMAZONAWS.COM';
EXEC master.dbo.sp_addlinkedsrvlogin
 @rmtsrvname=N'rds_sqlserver',@useself=N'False',@locallogin=NULL,@rmtuser=N'username',@rmtpassw
```

When the linked server is in place, you can then use T-SQL OPENQUERY() or standard four-part naming to reference a table, view, or other supported objects, on the remote server:

```
SELECT * FROM OPENQUERY(rds_sqlserver, 'SELECT * FROM TestDB.dbo.t1');
SELECT * FROM rds_sqlserver.TestDB.dbo.t1;
```

To drop the linked server and all associated logins:

```
EXEC master.dbo.sp_dropserver @server=N'rds_sqlserver', @droplogins=N'droplogins';
```

Troubleshooting

You can use the same security group for both source and remote servers to allow them to communicate with each other. Security group should allow only inbound traffic on TDS port (1433 by default) and source IP in security group can be set as the security group ID itself. For more information on how to set the rules for connecting to an instance from another instance with the same security group, see Rules to connect to instances from an instance with the same security group.

If access isn't configured correctly, an error message similar to the following example appears when you try to query the remote server.

```
TDS client library error: DB #: 20009, DB Msg: Unable to connect: server is unavailable
 or does not exist (mssql2019.aws-region.rds.amazonaws.com), OS #: 110, OS Msg:
 Connection timed out, Level: 9
```

Using Full Text Search in Babelfish

Starting with version 4.0.0, Babelfish provides limited support for Full Text Search (FTS). FTS is a powerful feature in relational databases that enables efficient searching and indexing of text-heavy data. It allows you to perform complex text searches and retrieve relevant results quickly. FTS is particularly valuable for applications that deal with large volumes of textual data, such as content management systems, e-commerce platforms, and document archives.

Understanding Babelfish Full Text Search supported features

Babelfish supports the following Full Text Search features:

- CONTAINS Clause:
  - Basic support for the CONTAINS clause.

    ```
    CONTAINS (
         {
            column_name
         }
         , '<contains_search_condition>'
    )
    ```

    > **Note**
    >
    > Currently, only English language is supported.

  - Comprehensive handling and translation of `simple_term` search strings.
- `FULLTEXT INDEX` Clause:
  - Supports only `CREATE FULLTEXT INDEX ON table_name(column_name [...n]) KEY INDEX index_name` statement.
  - Supports full `DROP FULLTEXT INDEX` statement.

> **Note**
>
> In order to re-index the Full Text Index, you need to drop the Full Text Index and create a new one on the same column.

- Special characters in search condition:
  - Babelfish ensures that single occurrences of special characters in search strings are handled effectively.

    > **Note**
    >
    > While Babelfish now identifies special characters in search string, it's essential to recognize that the results obtained may vary compared to those obtained with T-SQL.

- Table alias in column_name:
  - With table alias support, users can create more concise and readable SQL queries for Full-Text Search.

Limitations in Babelfish Full Text Search

- Currently, the following options aren't supported in Babelfish for `CONTAINS` Clause.
  - Special characters and Languages other than English aren't supported. You will receive the generic error message for unsupported characters and language

    ```
    Full-text search conditions with special characters or languages other than English
     are not currently supported in Babelfish
    ```

  - Multiple columns like `column_list`
  - PROPERTY attribute
  - `prefix_term`, `generation_term`, `generic_proximity_term`, `custom_proximity_term`, and `weighted_term`
  - Boolean operators aren't supported and you will receive the following error message when used:

```
boolean operators not supported
```

  - Identifier names with dots aren't supported.
- Currently, the following options aren't supported in Babelfish for `CREATE FULLTEXT INDEX` Clause.
  - [TYPE COLUMN type_column_name]
  - [LANGUAGE language_term]
  - [STATISTICAL_SEMANTICS]
  - catalog filegroup options
  - with options
- Creating a full text catalog isn't supported. Creating a full text index doesn't require a full text catalog.
- `CREATE FULLTEXT INDEX` doesn't support identifier names with dots.
- Babelfish doesn't currently support consecutive special characters in search strings. You will receive the following error message when used:

```
Consecutive special characters in the full-text search condition are not currently
 supported in Babelfish
```

Babelfish supports Geospatial data types

Starting with versions 3.5.0 and 4.1.0, Babelfish includes support for the following two spatial data types:

- **Geometry data type** – This data type is intended for storing planar or Euclidean (flat-earth) data.
- **Geography data type** – This data type is intended for storing ellipsoidal or round-earth data, such as GPS latitude and longitude coordinates.

These data types allow for the storage and manipulation of spatial data, but with limitations.

Understanding the Geospatial data types in Babelfish

- Geospatial data types are supported in various database objects such as views, procedures, and tables.

- Supports point data type to store location data as points defined by latitude, longitude, and a valid Spatial Reference System Identifier (SRID). A point may contain Z (elevation), M (measure) values and can be empty.
- Supports linestring data type (from version 5.4.0) defined by a sequence of points and the line segments connecting them and a valid Spatial Reference System Identifier (SRID). A linestring may contain points with Z (elevation), M (measure) values and can be empty.
- Supports polygon data type (from version 5.5.0 and 6.0.0). A Polygon is a two-dimensional surface stored as a sequence of points defining an exterior bounding ring and zero or more interior rings.
- Supports Multipoint data type (from version 5.6.0 and 6.1.0). A MultiPoint is a collection of zero or more points. The boundary of a MultiPoint instance is empty.
- Supports MultiLineString data type (from version 5.7.0 and 6.2.0). A MultiLineString is a collection of zero or more geometry or geography LineString instances.
- Supports Spatial Indexes (from version 5.7.0 and 6.2.0). This allows you to index a spatial table column.
- Applications connecting to Babelfish through drivers like JDBC, ODBC, DOTNET, and PYTHON can utilize this Geospatial feature.

Geometry data type functions supported in Babelfish

- **STGeomFromText (*`geometry_tagged_text`*, SRID)** – Creates a geometry instance using Well-Known Text (WKT) representation.
- **STPointFromText (*`point_tagged_text`*, SRID)** – Creates a point instance using WKT representation.
- **Point (X, Y, SRID)** – Creates a point instance using float values of x and y coordinates.
- **<geometry_instance>.STAsText ( )** – Extracts WKT representation from geometry instance.
- **<geometry_instance>.STAsBinary ( )** – Extracts WKB representation from geometry instance.
- **<geometry_instance>.STArea ( )** – Calculates the total surface area of geometry instance.
- **<geometry_instance>.STSrid ( )** – Extracts the spatial reference identifier (SRID) of the geometry instance.
- **<geometry_instance>.STDimension ( )** – Retrieves spatial dimension of geometry instance.
- **<geometry_instance>.STIsEmpty ( )** – Checks if the geometry instance is empty.
- **<geometry_instance>.STIsClosed ( )** – Checks if the geometry instance is closed.

- **<geometry_instance>.STIsValid ( )** – Checks if the geometry instance is valid.
- **<geometry_instance>.STDistance (other_geometry)** – Calculates the distance between two geometry instances.
- **<geometry_instance>.STEquals (other_geometry)** – Checks if the geometry instance represents the same point set as another geometry instance.
- **<geometry_instance>.STContains (other_geometry)** – Checks if the geometry instance contains the other_geometry instance.
- **<geometry_instance>.STDisjoint (other_geometry)** – Checks if two geometry instances have no points in common.
- **<geometry_instance>.STIntersects (other_geometry)** – Checks if two geometry instances spatially intersect.
- **<geometry_instance>.STX** – Extracts the X coordinate (longitude) for geometry instance.
- **<geometry_instance>.STY** – Extracts the Y coordinate (latitude) for geometry instance.

Starting with versions 4.7.0 and 5.3.0, Babelfish includes support for the following spatial data functions:

- **<geometry_instance>.M** – Extracts the M coordinate of the geometry instance.
- **<geometry_instance>.Z** – Extracts the Z coordinate of the geometry instance.
- **<geometry_instance>.HasM** – Checks if the geometry instance has atleast one M value.
- **<geometry_instance>.HasZ** – Checks if the geometry instance has atleast one Z value.

Starting with versions 5.4.0, Babelfish includes support for the following spatial data function:

- **STLineFromText (*linestring_tagged_text*, SRID)** – Creates a linestring instance using WKT representation.

Starting with versions 5.5.0 and 6.0.0, Babelfish includes support for the following spatial data function:

- **STPolyFromText (*polygon_tagged_text*, SRID)** – Creates a polygon instance using WKT representation.

Starting with versions 5.6.0 and 6.1.0, Babelfish includes support for the following spatial data functions:

- **STMPointFromText (*multipoint_tagged_text*, SRID)** – Creates a multipoint instance using WKT representation.
- **<geometry_instance>.STNumPoints** – Returns the sum of the number of points in each of the figures in a geometry instance.
- **<geometry_instance>.STGeometryType** – Returns the geometry type name represented by a geometry instance.
- **<geometry_instance>.MakeValid()** – Creates a valid representation of a given invalid geometry without losing any of the input vertices.
- **Parse (*WKT representation*)** – Creates a geometry instance from a Well-Known Text (WKT) string, assuming SRID 0. Equivalent to STGeomFromText() but without requiring the SRID parameter. Supports optional Z and M values.

Starting with versions 5.7.0 and 6.2.0, Babelfish includes support for the following spatial data function:

- **STMLineFromText (*multilinestring_tagged_text*, SRID)** – Creates a multilinestring instance using WKT representation.

Geography data type functions supported in Babelfish

- **STGeomFromText (*geography_tagged_text*, SRID)** – Creates a geography instance using WKT representation.
- **STPointFromText (*point_tagged_text*, SRID)** – Creates a point instance using WKT representation.
- **Point (Lat, Long, SRID)** – Creates a point instance using float values of Latitude and Longitude.
- **<geography_instance>.STAsText ( )** – Extracts WKT representation from geography instance.
- **<geography_instance>.STAsBinary ( )** – Extracts WKB representation from geography instance.
- **<geography_instance>.STArea ( )** – Calculates the total surface area of geography instance.
- **<geography_instance>.STSrid ( )** – Extracts the spatial reference identifier (SRID) of the geography instance.
- **<geography_instance>.STDimension ( )** – Retrieves spatial dimension of geography instance.

- **<geography_instance>.STIsEmpty ( )** – Checks if the geography instance is empty.
- **<geography_instance>.STIsClosed ( )** – Checks if the geography instance is closed.
- **<geography_instance>.STIsValid( )** – Checks if the geography instance is valid.
- **<geography_instance>.STDistance (other_geography)** – Calculates the distance between two geography instances.
- **<geography_instance>.STEquals (other_geography)** – Checks if the geography instance represents the same point set as another geography instance.
- **<geography_instance>.STContains (other_geography)** – Checks if the geography instance contains the other_geography instance.
- **<geography_instance>.STDisjoint (other_geography)** – Checks if two geography instances have no points in common.
- **<geography_instance>.STIntersects (other_geography)** – Checks if two geography instances spatially intersect.
- **<geography_instance>.Lat** – Extracts the Latitude value for geography instance.
- **<geography_instance>.Long** – Extracts the Longitude value for geography instance.

Starting with versions 4.7.0 and 5.3.0, Babelfish includes support for the following spatial data functions:

- **<geography_instance>.M** – Extracts the M coordinate of the geography instance.
- **<geography_instance>.Z** – Extracts the Z coordinate of the geography instance.
- **<geography_instance>.HasM** – Checks if the geography instance has atleast one M value.
- **<geography_instance>.HasZ** – Checks if the geography instance has atleast one Z value.

Starting with versions 5.4.0, Babelfish includes support for the following spatial data function:

- **STLineFromText (*linestring_tagged_text*, SRID)** – Creates a linestring instance using WKT representation.

Starting with versions 5.5.0 and 6.0.0, Babelfish includes support for the following spatial data function:

- **STPolyFromText (*polygon_tagged_text*, SRID)** – Creates a polygon instance using WKT representation.

Starting with versions 5.6.0 and 6.1.0, Babelfish includes support for the following spatial data functions:

- **STMPointFromText (*multipoint_tagged_text*, SRID)** – Creates a multipoint instance using WKT representation.
- **<geography_instance>.STNumPoints** – Returns the sum of the number of points in each of the figures in a geography instance.
- **<geography_instance>.STGeometryType** – Returns the geography type name represented by a geography instance.
- **<geography_instance>.MakeValid()** – Creates a valid representation of a given invalid geography without losing any of the input vertices.
- **Parse (*WKT representation*)** – Creates a geography instance from a Well-Known Text (WKT) string, assuming SRID 4326. Equivalent to STGeomFromText() but without requiring the SRID parameter. Supports optional Z and M values.

Starting with versions 5.7.0 and 6.2.0, Babelfish includes support for the following spatial data function:

- **STMLineFromText (*multilinestring_tagged_text*, SRID)** – Creates a multilinestring instance using WKT representation.

Limitations in Babelfish for Geospatial data types

- Geometry and Geography types other than point, linestring, polygon, multipoint and multilinestring instances aren't currently supported:
  - CircularString
  - CompoundCurve
  - CurvePolygon
  - MultiPolygon
  - GeometryCollection
- When creating a spatial index, the USING clause and WITH tuning options aren't currently supported. Basic CREATE SPATIAL INDEX is supported.
- Only the listed functions are currently supported for these data types. For more information, see Geometry data type functions supported in Babelfish and Geography data type functions supported in Babelfish.

- STDistance function output for Geography data might have minor precision variations compared to T-SQL. This is due to the underlying PostGIS implementation. For more information, see ST_Distance
- STIsValid function output for both Geometry and Geography data might have some deviations compared to T-SQL. Due to this, the functions - STDistance, STContains, STInstersects, STDisjoint, STDimension, STArea, STEquals may also deviate from T-SQL for some cases (returns output instead of throwing error). This is due to the underlying PostGIS implementation. For more information, see ST_IsValid.
- For optimal performance, use built-in Geospatial data types, without creating additional layers of abstraction in Babelfish.
- In Babelfish, Geospatial function names are used as keywords and will perform spatial operations only if used in the intended way.

Understanding partitioning in Babelfish

Starting with version 4.3.0, Babelfish introduces table and index partitioning with limited support. The following sections provide details on creating partition functions, defining partition schemes, and implementing partitioned tables and indexes in Babelfish.

Topics

- Introducing to partitioning in Babelfish
- Limitations and workarounds

Introducing to partitioning in Babelfish

- **Partition functions:**
  - `CREATE PARTITION FUNCTION:` Defines how a table or index is partitioned by specifying the partitioning column type and the range of values for each partition.
  - `DROP PARTITION FUNCTION:` Removes an existing partition function.
- **Partition schemes:**
  - `CREATE PARTITION SCHEME:` Defines the mapping between partitions and filegroups.

> **Note**
>
> In Babelfish, filegroups are treated as dummy objects and do not represent physical storage locations.

  - `DROP PARTITION SCHEME`: Removes an existing partition scheme.
- **System function:**
  - `$PARTITION`: This system function returns the partition number to which a specified value in a partitioning column would belong in a specified partitioned table.
- **Partitioned tables and indexes:**
  - `CREATE TABLE ... ON partition_scheme_name (partition_column_name)`: Creates a partitioned table based on a specified partition scheme and partitioning column.
  - `CREATE INDEX ... ON partition_scheme_name (partition_column_name)`: Creates a partitioned index based on a specified partition scheme and partitioning column.
- **System views for partitioning metadata:**

  The following system views are added to provide metadata related to partitioning:
  - `sys.destination_data_spaces`
  - `sys.partitions`
  - `sys.partition_functions`
  - `sys.partition_parameters`
  - `sys.partition_range_values`
  - `sys.partition_schemes`

Limitations and workarounds

The following SQL Server partitioning capabilities aren't yet supported by Babelfish:

- `ALTER PARTITION FUNCTION` and `ALTER PARTITION SCHEME`.

> **Note**
>
> Babelfish doesn't support split and merge operations. Define all partitions in the partition functions during creation because you can't add or remove partitions later.

- Computed columns as partitioning columns.
- `INSERT BULK` and BCP utility for partitioned tables.
- `LEFT` boundary option for partition functions.
- `SQL_VARIANT` data type for partition functions.
- `TRUNCATE TABLE ... WITH PARTITION`.
- `ALTER TABLE ... SWITCH PARTITION`.
- Un-aligned partitioned indexes such as partition scheme and partition column that differs from the partitioned table.
- DMS migration from Babelfish source is supported only for Full Load tasks on partitioned tables.
- Babelfish doesn't support these syntax options but provides workarounds:
  - Usage of partition scheme with constraints or indexes in the CREATE TABLE statement.
  - ALTER TABLE ... ADD CONSTRAINT ... ON partition_scheme_name (partition_column_name).

> **Note**
>
> You can set the `babelfishpg_tsql.escape_hatch_storage_on_partition` escape hatch to ignore. This will allow the parser to ignore the partition scheme option used with constraints or indexes, and the backend will create individual constraints or indexes for each partition.

Babelfish temporary tables on read replicas

Starting with **Babelfish 6.2.0** and **Babelfish 5.8.0**, Babelfish supports local temporary tables and table variables on Aurora PostgreSQL read replicas. With this support, SQL Server Management Studio (SSMS) and T-SQL applications that use temporary tables and table variables as intermediate scratch space can connect and operate normally against read replicas without any application changes.

Topics

- Why temporary tables on read replicas matter
- Enabling temporary tables on Aurora read replicas
- Supported operations
- Limitations and considerations

Why temporary tables on read replicas matter

Amazon Aurora PostgreSQL read replicas let you scale the read operations of your application. By connecting to the reader endpoint of the cluster, Aurora can spread the load for read-only connections across as many Aurora Replicas as you have in the cluster. Aurora Replicas also help to increase availability. If the writer instance in a cluster becomes unavailable, Aurora automatically promotes one of the reader instances to take its place as the new writer.

SQL Server applications and tooling rely heavily on session-local temporary tables (`#temp`) and table variables (`DECLARE @t TABLE`) – not just in application code, but at the driver and tooling level. SQL Server Management Studio (SSMS), the standard SQL Server management tool, creates temporary tables internally for IntelliSense, query result caching, and object scripting. Prior to Babelfish 6.2.0 and Babelfish 5.8.0, any attempt to create a temporary table or table variable on an Aurora replica failed with:

```
ERROR: cannot execute CREATE TABLE in a read-only transaction
```

This error blocked two critical customer use cases:

- **SSMS connected to an Aurora replica** – SSMS could not function because its internal IntelliSense mechanism creates temporary tables automatically on connection.
- **Read-heavy application workloads** – T-SQL applications commonly stage intermediate query results in local temporary tables and table variables before aggregation or joining. These patterns failed entirely on read replicas, forcing customers to route workloads to the primary writer or restructure application logic.

Starting with Babelfish 6.2.0 and Babelfish 5.8.0, both limitations are resolved. Local temporary tables and table variables are fully supported on read replicas. Only session-local temporary objects – temporary tables and table variables – are exempt, because they are never written to shared storage.

Enabling temporary tables on Aurora read replicas

Temporary table support on read replicas is controlled by the GUC parameter `babelfishpg_tsql.enable_temp_table_on_ro`.

New parameter groups

For clusters created on Aurora PostgreSQL 18.6 and Aurora PostgreSQL 17.11 or later, `enable_temp_table_on_ro` is **enabled by default**. No action is required.

Existing parameter groups

Clusters upgraded to Aurora PostgreSQL 17.11 or Aurora PostgreSQL 18.6 from an earlier version can update the Aurora cluster parameter group. For more information, see Modifying parameters in a DB parameter group in Amazon Aurora. The change takes effect immediately – no cluster restart is required.

```
aws rds modify-db-cluster-parameter-group \
  --db-cluster-parameter-group-name your-cluster-parameter-group-name \
  --parameters \

 "ParameterName=babelfishpg_tsql.enable_temp_table_on_ro,ParameterValue=on,ApplyMethod=immediat
```

Supported operations

The following temporary table and table variable operations are supported on Babelfish read replicas.

Local temporary table DDL

The following local temporary table DDL operations are supported on read replicas:

- `CREATE TABLE #tablename (...)` – creates a session-local temporary table on the read replica.
- `SELECT col1, col2 INTO #tablename FROM source WHERE ...` – creates and populates a temporary table from a read query in a single statement.
- `DROP TABLE #tablename` – explicitly drops a temporary table within the session; all temporary tables are also dropped automatically when the session ends.
- `TRUNCATE TABLE #tablename` – removes all rows from a temporary table without dropping it.

Local temporary table DML

The following local temporary table DML operations are supported on read replicas:

- `INSERT INTO #tablename ...`
- `SELECT ... FROM #tablename`
- `UPDATE #tablename SET ...`
- `DELETE FROM #tablename WHERE ...`

Table variables

`DECLARE @variable_name TABLE (...)` – declares a session-local table variable. Table variables are scoped to the batch or stored procedure in which they are declared and are dropped automatically at the end of that scope.

Procedural and dynamic SQL patterns

The following procedural and dynamic SQL patterns are supported on read replicas:

- Stored procedures and batches that create temporary tables and read from permanent tables execute end-to-end on read replicas.
- `sp_executesql` with dynamic SQL that creates and uses temporary tables works on read replicas.

Limitations and considerations

The following limitations apply to temporary tables and table variables on read replicas.

Unsupported operations

Temporary tables that reference user-defined objects are not supported. Temporary table definitions that reference user-defined types (UDTs), user-defined functions (UDFs), or other user-defined objects in column definitions or constraints are blocked on read replicas. Use only built-in system types and system functions in temporary table definitions on read replicas.

Per-session temporary object limit

A single session can hold up to **65,536 temp objects** due to the pre-defined buffer pool size. If you exceed this limit, you see the following error:

```
Unable to allocate oid for temp table. Drop some temporary tables or start a new
 session
```

You can drop some temporary tables to create new ones or reset the session (drop and re-create the connection) to reset the limit.

Troubleshooting Babelfish

Following, you can find troubleshooting ideas and workarounds for some Babelfish DB cluster issues.

Topics

- Connection failure

Connection failure

Common causes of connection failures to a new Aurora DB cluster with Babelfish include the following:

- **Security group doesn't allow access** – If you're having trouble connecting to a Babelfish, make sure that you added your IP address to the default Amazon EC2 security group. You can use https://checkip.amazonaws.com/ to determine your IP address and then add it to your in-bound rule for the TDS port and the PostgreSQL port. For more information, see Add rules to a security group in the *Amazon EC2 User Guide*.
- **Mismatching SSL configurations** – If the `rds.force_ssl` parameter is turned on (set to 1) on Aurora PostgreSQL, then clients must connect to Babelfish over SSL. If your client isn't set up correctly, you see an error message such as the following:

  ```
  Cannot connect to your-Babelfish-DB-cluster, 1433
  ---------------------
  ADDITIONAL INFORMATION:
  no pg_hba_conf entry for host "256.256.256.256", user "your-user-name",
  "database babelfish_db", SSL off (Microsoft SQL Server, Error: 33557097)
  ...
  ```

  This error indicates a possible SSL configuration issue between your local client and the Babelfish DB cluster, and that the cluster requires clients to use SSL (its `rds.force_ssl` parameter is set to 1). For more information about configuring SSL, see Using SSL with a PostgreSQL DB instance in the *Amazon RDS User Guide*.

  If you are using SQL Server Management Studio (SSMS) to connect to Babelfish and you see this error, you can choose **Encrypt connection** and **Trust server certificate** connection options on the Connection Properties pane and try again. These settings handle the SSL connection requirement for SSMS.

For more information about troubleshooting Aurora connection issues, see Can't connect to Amazon RDS DB instance.

Managing Babelfish for Aurora PostgreSQL version updates

Babelfish is an option available with Aurora PostgreSQL version 13.4 and higher releases. Updates to Babelfish become available with certain new releases of the Aurora PostgreSQL database engine. For more information, see the *Release Notes for Aurora PostgreSQL*.

> **Note**
>
> Babelfish DB clusters running on any version of Aurora PostgreSQL 13 can't be upgraded to Aurora PostgreSQL 14.3, 14.4, and 14.5. Also, Babelfish doesn't support a direct upgrade from 13.x to 15.x. You must first upgrade your 13.x DB cluster to 14.6 and higher version and then upgrade to 15.x version.

For a list of supported functionality across different Babelfish releases, see Supported functionalities in Babelfish by version.

For a list of currently unsupported functionality, see Unsupported functionalities in Babelfish.

You can get a list of Aurora PostgreSQL versions that support Babelfish by querying your Amazon Web Services Region using the describe-db-engine-versions Amazon CLI command, as follows.

For Linux, macOS, or Unix:

```
$ aws rds describe-db-engine-versions --region us-east-1 \
    --engine aurora-postgresql \
    --query '*[]|[?SupportsBabelfish==`true`].[EngineVersion]' \
    --output text
```

For more information, see describe-db-engine-versions in the *Amazon CLI Command Reference*.

In the following topics, you can learn how to identify the version of Babelfish running on your Aurora PostgreSQL DB cluster, and how to upgrade to a new version.

Contents

- Identifying your version of Babelfish
- Upgrading your Babelfish cluster to a new version
  - Upgrading Babelfish to a new minor version

- Upgrading Babelfish to a new major version
  - Before upgrading Babelfish to a new major version
  - Performing major version upgrade
  - After upgrading to a new major version
  - Example: Upgrading the Babelfish DB cluster to a major release
- Using Babelfish product version parameter
  - Configuring Babelfish product version parameter
  - Affected queries and parameter
  - Interface with babelfishpg_tsql.version parameter

Identifying your version of Babelfish

You can query Babelfish to find details about the Babelfish version, the Aurora PostgreSQL version, and the compatible Microsoft SQL Server version. You can use the TDS port or the PostgreSQL port.

- To use the TDS port to query for version information
- To use the PostgreSQL port to query for version information

To use the TDS port to query for version information

1. Use `sqlcmd` or `ssms` to connect to the endpoint for your Babelfish DB cluster.

   ```
   sqlcmd -S bfish_db.cluster-123456789012.aws-region.rds.amazonaws.com,1433 -U
       login-id -P password -d db_name
   ```

2. To identify the Babelfish version, run the following query:

   ```
   1> SELECT CAST(serverproperty('babelfishversion') AS VARCHAR)
   2> GO
   ```

   The query returns results similar to the following:

   ```
   serverproperty
   ------------------------------
   3.4.0
   ```

```
(1 rows affected)
```

3. To identify the version of the Aurora PostgreSQL DB cluster, run the following query:

```
1> SELECT aurora_version() AS aurora_version
2> GO
```

The query returns results similar to the following:

```
aurora_version


-----------------------------------------------
15.5.0

(1 rows affected)
```

4. To identify the compatible Microsoft SQL Server version, run the following query:

```
1> SELECT @@VERSION AS version
2> GO
```

The query returns results similar to the following:

```
Babelfish for Aurora PostgreSQL with SQL Server Compatibility - 12.0.2000.8
Dec 7 2023 09:43:06
Copyright (c) Amazon Web Services
PostgreSQL 15.5 on x86_64-pc-linux-gnu (Babelfish 3.4.0)

(1 rows affected)
```

As an example that shows one minor difference between Babelfish and Microsoft SQL Server, you can run the following query. On Babelfish, the query returns 1, while on Microsoft SQL Server, the query returns NULL.

```
SELECT CAST(serverproperty('babelfish') AS VARCHAR) AS runs_on_babelfish
```

You can also use the PostgreSQL port to obtain version information, as shown in the following procedure.

To use the PostgreSQL port to query for version information

1. Use `psql` or pgAdmin to connect to the endpoint for your Babelfish DB cluster.

```
psql host=bfish_db.cluster-123456789012.aws-region.rds.amazonaws.com
     port=5432 dbname=babelfish_db user=sa
```

2. Turn on the extended feature (`\x`) of `psql` for more readable output.

```
babelfish_db=> \x
babelfish_db=> SELECT
babelfish_db=> aurora_version() AS aurora_version,
babelfish_db=> version() AS postgresql_version,
babelfish_db=> sys.version() AS Babelfish_compatibility,
babelfish_db=> sys.SERVERPROPERTY('BabelfishVersion') AS Babelfish_Version;
```

The query returns output similar to the following:

```
-[ RECORD 1 ]-----------
+-----------------------------------------------------------------------------------------------
aurora_version          | 15.5.0
postgresql_version      | PostgreSQL 15.5 on x86_64-pc-linux-gnu, compiled by
 x86_64-pc-linux-gnu-gcc (GCC) 9.5.0, 64-bit
babelfish_compatibility | Babelfish for Aurora Postgres with SQL Server
 Compatibility - 12.0.2000.8                    +
                         | Dec 7 2023 09:43:06
                                    +
                         | Copyright (c) Amazon Web Services
                                     +
                         | PostgreSQL 15.5 on x86_64-pc-linux-gnu (Babelfish 3.4.0)
babelfish_version       | 3.4.0
```

Upgrading your Babelfish cluster to a new version

New versions of Babelfish become available with some new releases of the Aurora PostgreSQL database engine after version 13.4. Each new release of Babelfish has its own version number. As

with Aurora PostgreSQL, Babelfish uses the *major*.*minor*.*patch* naming scheme for versions. For example, the first Babelfish release, Babelfish version 1.0.0, became available as part of Aurora PostgreSQL 13.4.0.

Babelfish doesn't require a separate installation process. As discussed in Creating a Babelfish for Aurora PostgreSQL DB cluster, **Turn on Babelfish** is an option that you choose when you create an Aurora PostgreSQL DB cluster.

Likewise, you can't upgrade Babelfish independently from the supporting Aurora DB cluster. To upgrade an existing Babelfish for Aurora PostgreSQL DB cluster to a new version of Babelfish, you upgrade the Aurora PostgreSQL DB cluster to a new version that supports the version of Babelfish that you want to use. The procedure that you follow for the upgrade depends on the version of Aurora PostgreSQL that's supporting your Babelfish deployment, as follows.

Major version upgrades

You must upgrade the following Aurora PostgreSQL versions to Aurora PostgreSQL 14.6 and higher version before upgrading to Aurora PostgreSQL 15.2 version.

- Aurora PostgreSQL 13.8 and all higher versions
- Aurora PostgreSQL 13.7.1 and all higher minor versions
- Aurora PostgreSQL 13.6.4 and all higher minor versions

You can upgrade Aurora PostgreSQL 14.6 and higher versions to Aurora PostgreSQL 15.2 and higher versions.

Upgrading an Aurora PostgreSQL DB cluster to a new major version involves several preliminary tasks. For more information, see Performing a major version upgrade. To successfully upgrade your Babelfish for Aurora PostgreSQL DB cluster, you need to create a custom DB cluster parameter group for the new Aurora PostgreSQL version. This new parameter group must contain the same Babelfish parameter settings as that of the cluster that you're upgrading. For more information and for a table of major version upgrade sources and targets, see Upgrading Babelfish to a new major version.

Minor version upgrades and patches

Minor versions and patches don't require the creation of a new DB cluster parameter group for the upgrade. Minor versions and patches can use the minor version upgrade process, whether that's applied automatically or manually. For more information and a table of version sources and targets, see Upgrading Babelfish to a new minor version.

> **Note**
>
> Before performing a major or a minor upgrade, apply all pending maintenance tasks to your Babelfish for Aurora PostgreSQL cluster.

Topics


- Upgrading Babelfish to a new minor version
- Upgrading Babelfish to a new major version

Upgrading Babelfish to a new minor version

A minor version update aims to maintain backward compatibility. However, in some cases, critical security fixes or important bug fixes may not be fully backward compatible. A *patch* version includes important fixes for a minor version after its release. For example, the version label for the first release of Aurora PostgreSQL 13.4 was Aurora PostgreSQL 13.4.0. Several patches for that minor version have been released to date, including Aurora PostgreSQL 13.4.1, 13.4.2, and 13.4.4. You can find the patches available for each Aurora PostgreSQL version in the **Patch releases** list on the Aurora PostgreSQL release notes page for that version. For an example, see PostgreSQL 14.3 in the *Release Notes for Aurora PostgreSQL*.

If your Aurora PostgreSQL DB cluster is configured with the **Auto minor version upgrade** option, your Babelfish for Aurora PostgreSQL DB cluster is upgraded automatically during the cluster's maintenance window. To learn more about auto minor version upgrade (AmVU) and how to use it, see Automatic minor version upgrades for Aurora DB clusters. If your cluster isn't using AmVU, you can manually upgrade your Babelfish for Aurora PostgreSQL DB cluster to new minor versions either by responding to maintenance tasks, or by modifying the cluster to use the new version.

When you choose an Aurora PostgreSQL version to install and when you view an existing Aurora PostgreSQL DB cluster in the Amazon Web Services Management Console, the version displays the *`major.minor`* digits only. For example, the following image from the Console for an existing Babelfish for Aurora PostgreSQL DB cluster with Aurora PostgreSQL 13.4 recommends upgrading the cluster to version 13.7, a new minor release of Aurora PostgreSQL.

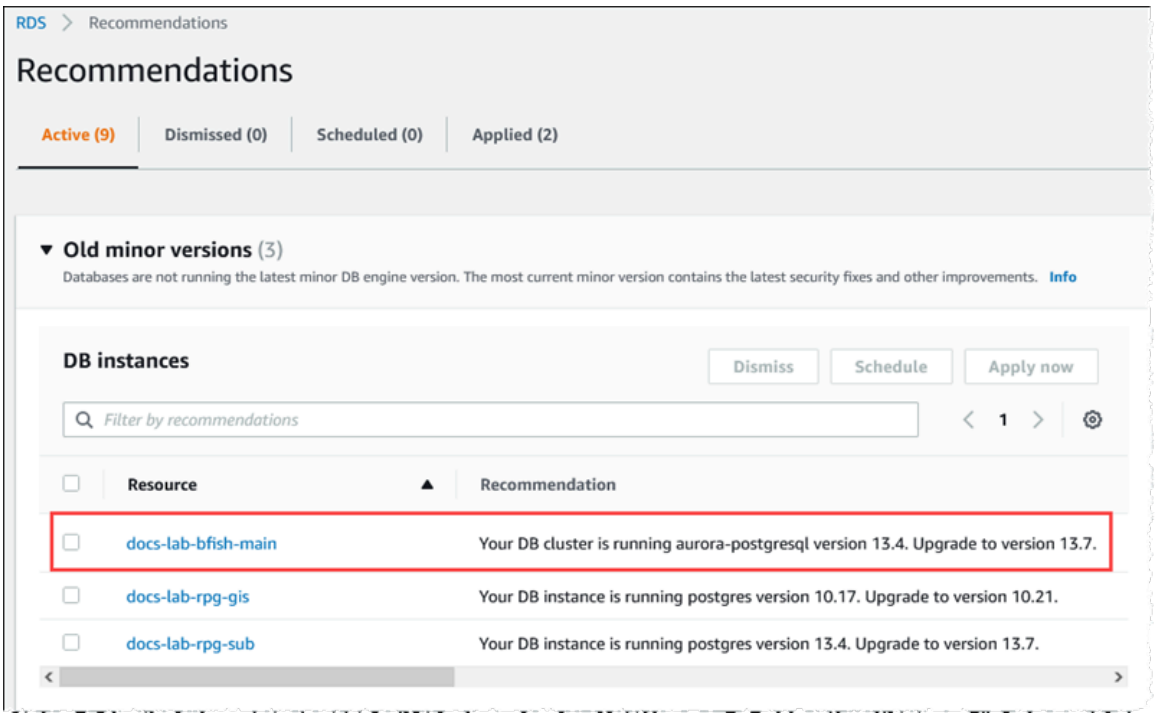

To get complete version details, including the *patch* level, you can query the Aurora PostgreSQL DB cluster using the `aurora_version` Aurora PostgreSQL function. For more information, see aurora_version in the Aurora PostgreSQL functions reference. You can find an example of using the function in the To use the PostgreSQL port to query for version information procedure in Identifying your version of Babelfish.

The following table shows Aurora PostgreSQL and Babelfish version and the available target versions that can support the minor version upgrade process.

Current source versions	Newest upgrade targets
Aurora PostgreSQL (Babelfish)	Aurora PostgreSQL (Babelfish)
18.4 (6.1)	18.6 (6.2)
18.3 (6.0)	18.6 (6.2), 18.4 (6.1)
17.10 (5.6)	17.11 (5.7)
17.9 (5.5)	17.11 (5.7), 17.10 (5.6)
17.7 (5.4)	17.11 (5.7), 17.10 (5.6), 17.9 (5.5)

Current source versions	Newest upgrade targets
17.6 (5.3)	17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4)
17.5 (5.2)	17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3)
17.4 (5.1)	17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 17.5 (5.2)
16.14 (4.10)	16.15 (4.11)
16.13 (4.9)	16.15 (4.11), 16.14 (4.10)
16.11 (4.8)	16.15 (4.11), 16.14 (4.10), 16.13 (4.9)
16.10 (4.7)	16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8)
16.9 (4.6)	16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7)
16.8 (4.5)	16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7), 16.9 (4.6)
15.18 (3.14)	15.19 (3.15)
15.17 (3.13)	15.19 (3.15), 15.18 (3.14)
15.15 (3.12)	15.19 (3.15), 15.18 (3.14), 15.17 (3.13)
15.14 (3.11)	15.19 (3.15), 15.18 (3.14), 15.17 (3.13), 15.15 (3.12)
15.13 (3.10)	15.19 (3.15), 15.18 (3.14), 15.17 (3.13), 15.15 (3.12), 15.14 (3.11)
15.12 (3.9)	15.19 (3.15), 15.18 (3.14), 15.17 (3.13), 15.15 (3.12), 15.14 (3.11), 15.13 (3.10)

Current source versions	Newest upgrade targets
15.10 (3.8)	15.19 (3.15), 15.18 (3.14), 15.17 (3.13), 15.15 (3.12), 15.14 (3.11), 15.13 (3.10), 15.12 (3.9)
14.23 (2.17)	14.24 (2.18)
14.22 (2.16)	14.24 (2.18), 14.23 (2.17)
14.20 (2.15)	14.24 (2.18), 14.23 (2.17), 14.22 (2.16)
14.19 (2.14)	14.24 (2.18), 14.23 (2.17), 14.22 (2.16), 14.20 (2.15)
14.18 (2.13)	14.24 (2.18), 14.23 (2.17), 14.22 (2.16), 14.20 (2.15), 14.19 (2.14)
14.17 (2.12)	14.24 (2.18), 14.23 (2.17), 14.22 (2.16), 14.20 (2.15), 14.19 (2.14), 14.18 (2.13)
14.6 (2.3)	14.24 (2.18), 14.23 (2.17), 14.22 (2.16), 14.20 (2.15), 14.19 (2.14), 14.18 (2.13), 14.17 (2.12)

Upgrading Babelfish to a new major version

For a major version upgrade, you need to first upgrade your Babelfish for Aurora PostgreSQL DB cluster to a version that supports the major version upgrade. To achieve this, apply patch updates or minor version upgrades to your DB cluster. For more information,see Upgrading Babelfish to a new minor version.

The following table shows Aurora PostgreSQL version and Babelfish version that can support a major version upgrade.

Current source versions	Newest upgrade targets
Aurora PostgreSQL (Babelfish)	Aurora PostgreSQL (Babelfish)
17.11 (5.7)	18.6 (6.2)

Current source versions	Newest upgrade targets
17.10 (5.6)	18.6 (6.2), 18.4 (6.1)
17.9 (5.5)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0)
17.7 (5.4)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0)
17.6 (5.3)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0)
17.5 (5.2)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0)
17.4 (5.1)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0)
16.15 (4.11)	18.6 (6.2), 17.11 (5.7)
16.14 (4.10)	18.6 (6.2), 18.4 (6.1), 17.11 (5.7), 17.10 (5.6)
16.13 (4.9)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5)
16.11 (4.8)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4)
16.10 (4.7)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3)
16.9 (4.6)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 17.5 (5.2)
16.8 (4.5)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 17.5 (5.2), 17.4 (5.1)
15.19 (3.15)	18.6 (6.2), 17.11 (5.7), 16.15 (4.11)
15.18 (3.14)	18.6 (6.2), 18.4 (6.1), 17.11 (5.7), 17.10 (5.6), 16.15 (4.11), 16.14 (4.10)

Current source versions	Newest upgrade targets
15.17 (3.13)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9)
15.15 (3.12)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8)
15.14 (3.11)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7)
15.13 (3.10)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 17.5 (5.2), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7), 16.9 (4.6)
15.12 (3.9)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 17.5 (5.2), 17.4 (5.1), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7), 16.9 (4.6), 16.8 (4.5)
15.10 (3.8)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 17.5 (5.2), 17.4 (5.1), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7), 16.9 (4.6), 16.8 (4.5)
14.24 (2.18)	18.6 (6.2), 17.11 (5.7), 16.15 (4.11), 15.19 (3.15)
14.23 (2.17)	18.6 (6.2), 18.4 (6.1), 17.11 (5.7), 17.10 (5.6), 16.15 (4.11), 16.14 (4.10), 15.19 (3.15), 15.18 (3.14)

Current source versions	Newest upgrade targets
14.22 (2.16)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 15.19 (3.15), 15.18 (3.14), 15.17 (3.13)
14.20 (2.15)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 15.19 (3.15), 15.18 (3.14), 15.17 (3.13), 15.15 (3.12)
14.19 (2.14)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7), 15.19 (3.15), 15.18 (3.14), 15.17 (3.13), 15.15 (3.12), 15.14 (3.11)
14.18 (2.13)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 17.5 (5.2), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7), 16.9 (4.6), 15.19 (3.15), 15.18 (3.14), 15.17 (3.13), 15.15 (3.12), 15.14 (3.11), 15.13 (3.10)
14.17 (2.12)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 17.5 (5.2), 17.4 (5.1), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7), 16.9 (4.6), 16.8 (4.5), 15.19 (3.15), 15.18 (3.14), 15.17 (3.13), 15.15 (3.12), 15.14 (3.11), 15.13 (3.10), 15.12 (3.9)

Current source versions	Newest upgrade targets
14.6 (2.3)	18.6 (6.2), 18.4 (6.1), 18.3 (6.0), 17.11 (5.7), 17.10 (5.6), 17.9 (5.5), 17.7 (5.4), 17.6 (5.3), 17.5 (5.2), 17.4 (5.1), 16.15 (4.11), 16.14 (4.10), 16.13 (4.9), 16.11 (4.8), 16.10 (4.7), 16.9 (4.6), 16.8 (4.5), 15.19 (3.15), 15.18 (3.14), 15.17 (3.13), 15.15 (3.12), 15.14 (3.11), 15.13 (3.10), 15.12 (3.9), 15.10 (3.8)
13.9 (1.5)	14.6 (2.3)

Before upgrading Babelfish to a new major version

An upgrade might involve brief outages. For that reason, we recommend that you perform or schedule upgrades during your maintenance window or during other periods of low usage.

Before you perform a major version upgrade

1. Identify the Babelfish version of your existing Aurora PostgreSQL DB cluster by using the commands outlined in Identifying your version of Babelfish. The Aurora PostgreSQL version and Babelfish version information is handled by PostgreSQL, so follow the steps detailed in the To use the PostgreSQL port to query for version information procedure to get the details.
2. Verify if your version supports the major version upgrade. For the list of versions that support the major version upgrade feature, see Upgrading Babelfish to a new minor version and perform the necessary pre-upgrade tasks.

   For example, if your Babelfish version is running on an Aurora PostgreSQL 13.5 DB cluster and you want to upgrade to Aurora PostgreSQL 15.2, then first apply all the minor releases and patches to upgrade your cluster to Aurora PostgreSQL 14.6 or higher version. When your cluster is at version 14.6 or higher, continue with the major version upgrade process.
3. Create a manual snapshot of your current Babelfish DB cluster as a backup. The backup lets you restore the cluster to its Aurora PostgreSQL version, Babelfish version, and restore all data to the state before the upgrade. For more information, see Creating a DB cluster snapshot. Be sure to keep your existing custom DB cluster parameter group to use again if you decide to restore this cluster to its pre-upgraded state. For more information, see Restoring from a DB cluster snapshot and Parameter group considerations.

4. Prepare a custom DB cluster parameter group for the target Aurora PostgreSQL DB version. Duplicate the settings for the Babelfish parameters from your current Babelfish for Aurora PostgreSQL DB cluster. To find a list of all Babelfish parameters, see DB cluster parameter group settings for Babelfish. For a major version upgrade, the following parameters require the same settings as the source DB cluster. For the upgrade to succeed, all the settings must be the same.

   - rds.babelfish_status
   - babelfishpg_tds.tds_default_numeric_precision
   - babelfishpg_tds.tds_default_numeric_scale
   - babelfishpg_tsql.database_name
   - babelfishpg_tsql.default_locale
   - babelfishpg_tsql.migration_mode
   - babelfishpg_tsql.server_collation_name

   Warning

   If the settings for the Babelfish parameters in the custom DB cluster parameter group for the new Aurora PostgreSQL version don't match the parameter values of the cluster that you're upgrading, the `ModifyDBCluster` operation fails. An `InvalidParameterCombination` error message appears in the Amazon Web Services Management Console or in the output from the `modify-db-cluster` Amazon CLI command.

5. Use the Amazon Web Services Management Console or the Amazon CLI to create the custom DB cluster parameter group. Choose the applicable Aurora PostgreSQL family for the version of Aurora PostgreSQL that you want for the upgrade.

   Tip

   Parameter groups are managed at the Amazon Web Services Region level. When you work with Amazon CLI, you can configure with a default Region instead of specifying the `--region` in the command. To learn more about using the Amazon CLI, see Quick setup in the *Amazon Command Line Interface User Guide*.

Performing major version upgrade

1. Upgrade Aurora PostgreSQL DB cluster to a new major version. For more information, see Upgrading the Aurora PostgreSQL engine to a new major version.
2. Reboot the writer instance of the cluster, so that the parameter settings can take effect.

After upgrading to a new major version

After a major version upgrade to a new Aurora PostgreSQL version, the `IDENTITY` value in tables with an `IDENTITY` column might be larger (+32) than the value was before the upgrade. The result is that when the next row is inserted into such tables, the generated identity column value jumps to the +32 number and starts the sequence from there. This condition won't negatively affect the functions of your Babelfish DB cluster. However, if you want, you can reset the sequence object based on the maximum value of the column. To do so, connect to the T-SQL port on your Babelfish writer instance using `sqlcmd` or another SQL Server client. For more information, see Using a SQL Server client to connect to your DB cluster.

```
sqlcmd -S bfish-db.cluster-123456789012.aws-region.rds.amazonaws.com,1433 -U
     sa -P ******** -d dbname
```

When connected, use the following SQL command to generate statements that you can use to seed the associated sequence object. This SQL command works for both single database and multiple database Babelfish configurations. For more information about these two deployment models, see Using Babelfish with a single database or multiple databases.

```
DECLARE @schema_prefix NVARCHAR(200) = ''
IF current_setting('babelfishpg_tsql.migration_mode') = 'multi-db'
    SET @schema_prefix = db_name() + '_'
SELECT 'SELECT setval(pg_get_serial_sequence(''' + @schema_prefix +
 schema_name(tables.schema_id)
    + '.' + tables.name + ''', ''' + columns.name + '''),(select max(' + columns.name +
 ')
    FROM ' + schema_name(tables.schema_id) + '.' + tables.name + '));
    'FROM sys.tables tables JOIN sys.columns
    columns ON tables.object_id = columns.object_id
    WHERE columns.is_identity = 1
GO
```

The query generates a series of SELECT statements that you can then run to reset the maximum IDENTITY value and close any gap. The following shows the output when using the sample SQL Server database, Northwind, running on a Babelfish cluster.

```
-----------------------------------------------------
SELECT setval(pg_get_serial_sequence('northwind_dbo.categories', 'categoryid'),(select
 max(categoryid)
    FROM dbo.categories));

SELECT setval(pg_get_serial_sequence('northwind_dbo.orders', 'orderid'),(select
 max(orderid)
    FROM dbo.orders));


SELECT setval(pg_get_serial_sequence('northwind_dbo.products', 'productid'),(select
 max(productid)
    FROM dbo.products));


SELECT setval(pg_get_serial_sequence('northwind_dbo.shippers', 'shipperid'),(select
 max(shipperid)
    FROM dbo.shippers));


SELECT setval(pg_get_serial_sequence('northwind_dbo.suppliers', 'supplierid'),(select
 max(supplierid)
    FROM dbo.suppliers));


(5 rows affected)
```

Run the statements one by one to reset the sequence values.

Example: Upgrading the Babelfish DB cluster to a major release

In this example, you can find the series of Amazon CLI commands that explains how to upgrade an Aurora PostgreSQL 13.6.4 DB cluster running Babelfish version 1.2.2 to Aurora PostgreSQL 14.6. First, you create a custom DB cluster parameter group for Aurora PostgreSQL 14. Next, you modify the parameter values to match those of your Aurora PostgreSQL version 13 source. Finally, you perform the upgrade by modifying the source cluster. For more information, see DB cluster parameter group settings for Babelfish. In that topic, you can also find information about using the Amazon Web Services Management Console to perform the upgrade.

Use the create-db-cluster-parameter-group CLI command to create the DB cluster parameter group for the new version.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster-parameter-group \
    --db-cluster-parameter-group-name docs-lab-babelfish-apg-14 \
    --db-parameter-group-family aurora-postgresql14 \
    --description 'New custom parameter group for upgrade to new major version' \
    --region us-west-1
```

When you issue this command, the custom DB cluster parameter group is created in the Amazon Web Services Region. You see output similar to the following.

```
{
    "DBClusterParameterGroup": {
        "DBClusterParameterGroupName": "docs-lab-babelfish-apg-14",
        "DBParameterGroupFamily": "aurora-postgresql14",
        "Description": "New custom parameter group for upgrade to new major version",
        "DBClusterParameterGroupArn": "arn:aws:rds:us-west-1:111122223333:cluster-
pg:docs-lab-babelfish-apg-14"
    }
}
```

For more information, see Creating a DB cluster parameter groupin Amazon Aurora.

Use the modify-db-cluster-parameter-group CLI command to modify the settings so that they match the source cluster.

For Windows:

```
aws rds modify-db-cluster-parameter-group --db-cluster-parameter-group-name docs-lab-
babelfish-apg-14 ^
  --parameters
 "ParameterName=rds.babelfish_status,ParameterValue=on,ApplyMethod=pending-reboot" ^
 "ParameterName=babelfishpg_tds.tds_default_numeric_precision,ParameterValue=38,ApplyMethod=pen
reboot" ^
 "ParameterName=babelfishpg_tds.tds_default_numeric_scale,ParameterValue=8,ApplyMethod=pending-
reboot" ^
 "ParameterName=babelfishpg_tsql.database_name,ParameterValue=babelfish_db,ApplyMethod=pending-
reboot" ^
```

```
 "ParameterName=babelfishpg_tsql.default_locale,ParameterValue=en-
US,ApplyMethod=pending-reboot" ^
 "ParameterName=babelfishpg_tsql.migration_mode,ParameterValue=single-
db,ApplyMethod=pending-reboot" ^
 "ParameterName=babelfishpg_tsql.server_collation_name,ParameterValue=sql_latin1_general_cp1_ci
reboot"
```

The response looks similar to the following.

```
{
    "DBClusterParameterGroupName": "docs-lab-babelfish-apg-14"
}
```

Use the modify-db-cluster CLI command to modify the cluster to use the new version and the new custom DB cluster parameter group. You also specify the `--allow-major-version-upgrade` argument, as shown in the following sample.

```
aws rds modify-db-cluster \
--db-cluster-identifier docs-lab-bfish-apg-14 \
--engine-version 14.6 \
--db-cluster-parameter-group-name docs-lab-babelfish-apg-14 \
--allow-major-version-upgrade \
--region us-west-1 \
--apply-immediately
```

Use the reboot-db-instance CLI command to reboot the writer instance of the cluster, so that the parameter settings can take effect.

```
aws rds reboot-db-instance \
--db-instance-identifier docs-lab-bfish-apg-14-instance-1\
--region us-west-1
```

Using Babelfish product version parameter

A new Grand Unified Configuration (GUC) parameter called `babelfishpg_tds.product_version` is introduced from Babelfish 2.4.0 and 3.1.0 versions. This parameter allows you to set the SQL Server product version number as the output of Babelfish.

The parameter is a 4-part version ID string, and each part should be separated by ".".

Syntax

```
Major.Minor.Build.Revision
```

- Major Version: A number between 11 and 16.
- Minor Version: A number between 0 and 255.
- Build Version: A number between 0 and 65535.
- Revision: 0 and any positive number.

Configuring Babelfish product version parameter

You must use the cluster parameter group to set the babelfishpg_tds.product_version parameter in the console. For more information on how to modify the DB cluster parameter, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

When you set the product version parameter to an invalid value, the change will not take effect. Although the console might show you the new value, the parameter retains the previous value. Check the engine log file for details about the error messages.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
--db-cluster-parameter-group-name mydbparametergroup \
--parameters
 "ParameterName=babelfishpg_tds.product_version,ParameterValue=15.2.4000.1,ApplyMethod=immediat
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
--db-cluster-parameter-group-name mydbparametergroup ^
--parameters
 "ParameterName=babelfishpg_tds.product_version,ParameterValue=15.2.4000.1,ApplyMethod=immediat
```

Affected queries and parameter

Query/Parameter	Result	Effective time
SELECT @@VERSION	Returns user defined SQL Server version (babelfis hpg_tsql.version value = Default)	Immediately
SELECT SERVERPROPERTY('Pr oductVersion')	Returns user defined SQL Server version	Immediately
SELECT SERVERPROPERTY('Pr oductMajorVersion')	Returns Major Version of the user defined SQL Server version	Immediately
VERSION tokens in PRELOGIN Response Message	Server returns PRELOGIN messages with user defined SQL Server version	Takes effect when a user creates a new session
SQLServerVersion in LoginAck when using JDBC	DatabaseMetaData.g etDatabaseProductVersion() returns user defined SQL Server version	Takes effect when a user creates a new session

Interface with babelfishpg_tsql.version parameter

You can set the output of the @@VERSION using the parameters babelfishpg_tsql.version and babelfishpg_tds.product_version. The following examples show how these two parameters interface.

- When babelfishpg_tsql.version parameter is "default" and babelfishpg_tds.product_version is 15.0.2000.8.
  - Output of @@version – 15.0.2000.8.
- When babelfishpg_tsql.version parameter is set to 13.0.2000.8 and babelfishpg_tds.product_version parameter is 15.0.2000.8.
  - Output of @@version – 13.0.2000.8.

Babelfish for Aurora PostgreSQL reference

Topics

- Supported functionalities in Babelfish by version
- Unsupported functionalities in Babelfish
- Working with Babelfish for Aurora PostgreSQL procedures
- Babelfish supports XML datatype methods

Supported functionalities in Babelfish by version

In the following tables, you can find the list of all the functionalities supported by different Babelfish versions. For lists of unsupported functionality, see Unsupported functionalities in Babelfish. For information about various Babelfish releases, see the *Release Notes for Aurora PostgreSQL*.

Aurora and PostgreSQL features

In the following table, you can find Aurora and PostgreSQL features supported by different Babelfish versions.

Aurora and PostgreSQL features	5	5	5	4	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
Aurora ML services	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No
Database authentication with Kerberos using Amazon Directory Service	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	No
Dump and restore	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No
pg_stat_statement extension	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	No
pgvector	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No

Aurora and PostgreSQL features	5.5	5.5	5.5	4.7	4.7	4.7	4.6	4.6	4.6	4.5	4.5	3.4	3.4	3.4	3.3	3.3	3.3	3.2	3.2	3.2	2.12	2.11	2.10	2.9	2.8	2.7	2.6	2.5	2.4	2.3	2.2	2.1	2.0	1.0
Zero-downtime patching (ZDP)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
Shared plan cache	Y	N	N	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	

T-SQL Functionality or syntax

In the following table, you can find T-SQL functionality or syntax supported by different Babelfish versions.

T-SQL Functionality or syntax	5.5	5.5	4.7	4.7	4.7	4.6	4.6	4.5	4.5	3.4	3.4	3.4	3.3	3.3	3.3	3.2	3.2	3.2	2.12	2.11	2.10	2.9	2.8	2.7	2.6	2.5	2.4	2.3	2.2	2.1	2.0	1.0
4 parts object name references for SELECT statements	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No	
ALTER AUTHORIZATION syntax to change database owner	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
ALTER DATABASE *<db_name>* MODIFY NAME = *<new_db_name>*	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
ALTER FUNCTION	Y	Y	Y	Y	Y	N	N	N	N	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
ALTER PROCEDURE	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
ALTER ROLE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL Functionality or syntax	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
ALTER USER...WITH LOGIN	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
ALTER VIEW	Y	N	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
AS keyword in CREATE FUNCTION	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
AT TIME ZONE clause	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
Babelfish instance as a linked server	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	No	
Comparison operators !< and !>	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
CREATE INDEX ... ON partition_scheme_name (partition_column_name)	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
CREATE Instead of Triggers (DML) on SQL Server Views	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
CREATE PARTITION FUNCTION	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
CREATE PARTITION SCHEME	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
CREATE ROLE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL Functionality or syntax	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
CREATE TABLE ... ON partition_scheme_name (partition_column_name)	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
CREATE TRIGGER	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
CREATE OR ALTER VIEW	Y	N	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
Create unique indexes	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
Cross–database procedure execution	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
Cross–database references SELECT, INSERT, UPDATE, DELETE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
Cursor-typed parameters for input parameters only (not output)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
Data migration using the bcp client utility	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL Functionality or syntax	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
Datatypes TIMESTAMP, ROWVERSION (for usage information, see Features with limited implement ation	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
DEFAULT keyword in calls to stored procedures and functions	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
DBCC CHECKIDENT	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
DROP DATABASE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
DROP IF EXISTS (for SCHEMA, DATABASE, and USER objects)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
DROP INDEX index ON schema.table	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
DROP INDEX schema.table.index	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
DROP PARTITION FUNCTION	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
DROP PARTITION SCHEME	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
DROP ROLE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL Functionality or syntax	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
ENABLE/DISABLE TRIGGER	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
FULL TEXT SEARCH	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
Full Text Search with CONTAINS clause	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
Geometry and Geography spatial datatypes	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
GRANT	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
GRANT permission [,...n] ON SCHEMA	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
GUC babelfish pg_tds.product_version	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	No	
Identifiers with leading dot character	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
INSTEAD OF triggers on tables	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
INSTEAD OF triggers on views	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
KILL	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	

T-SQL Functionality or syntax	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
$PARTITION.partition_function_name(partition_column_value)	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
PIVOT(use in view definition from 4.4.0 and 3.8.0, common table expression from 3.4.0 , join from 3.4.0)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
REVOKE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
REVOKE permission [,...n] ON SCHEMA	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
SELECT...OFFSET... FETCH clauses	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
SELECT FOR JSON AUTO	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
SET BABELFISH_SHOWPLAN_ALL ON (and OFF)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
SET BABELFISH_STATISTICS PROFILE ON (OFF)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
SET CONTEXT_INFO	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	No	
SET LOCK_TIMEOUT	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL Functionality or syntax	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
SET NO_BROWSETABLE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
SET rowcount	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	
SET SHOWPLAN_ALL	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
SET STATISTICS IO	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
SET TRANSACTION ISOLATION LEVEL REPEATABLE READ	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
SET TRANSACTION ISOLATION LEVEL SERIALIZABLE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
SET TRANSACTION ISOLATION LEVEL syntax	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
SSMS: Connecting with the object explorer connection dialog	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
SSMS: Data migration with the Import/Export Wizard	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
SSMS: Partial support for the object explorer	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL Functionality or syntax	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
STDEV	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No
STDEVP	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No
Triggers with multiple DML actions can reference transition tables	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
T-SQL hints (join methods, index usage, MAXDOP)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No
T-SQL square bracket syntax with the LIKE predicate	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No
UNPIVOT	Y	N	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No
Unquoted string values in stored procedure calls and default values	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No
VAR	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No
VARP	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No

T-SQL Built-in functions

In the following table, you can find T-SQL Built-in functions supported by different Babelfish versions.

T-SQL Built-in functions	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
APP_NAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
ATN2	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
CHARINDEX	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
CHOOSE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
COL_LENGTH	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
COL_NAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
COLUMNS_UPDATED	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
COLUMNPROPERTY (CharMaxLen, AllowsNull only)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
CONCAT_WS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
CONTEXT_INFO	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	No	
CURSOR_STATUS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
DATABASE_PRINCIPAL_ID	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	No	
DATEADD	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
DATEDIFF	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
DATEDIFF_BIG	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
DATEFROMPARTS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
DATENAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	

T-SQL Built-in functions	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
DATEPART	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
DATETIMEFROMPARTS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
DATETIME2FROMPARTS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No	
DATETIMEOFFSETFROMPARTS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
DATETRUNC	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	Y	Y	Y	Y	Y	N	N	N	N	N	N	No	
DATE_BUCKET	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	Y	Y	Y	Y	Y	N	N	N	N	N	N	No	
EOMONTH	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	Y	Y	Y	Y	Y	N	N	N	N	N	N	No	
EXECUTE AS CALLER	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No		
fn_listextendedproperty	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No		
FOR JSON	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
FULLTEXTSERVICEPROPERTY	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
HAS_DBACCESS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
HAS_PERMS_BY_NAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
HOST_NAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
HOST_ID	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	N	N	N	N	N	No	
IDENTITY	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	

T-SQL Built-in functions	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
IS_MEMBER	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
IS_ROLEMEMBER	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
IS_SRVROLEMEMBER	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
ISJSON	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
JSON_MODIFY	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
JSON_QUERY	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
JSON_VALUE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
NEXT VALUE FOR	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N		No	
OBJECT_DEFINITION	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N		No	
OBJECT_SCHEMA_NAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N		No	
OPENJSON	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
OPENQUERY	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
ORIGINAL_LOGIN	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
PARSENAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No	
PATINDEX	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
ROWCOUNT_BIG	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No	
SCHEMA_NAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
SESSION_CONTEXT	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N		No	

T-SQL Built-in functions	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
SESSION_USER	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
SID_BINARY (returns NULL always)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
SMALLDATETIMEFROMPARTS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	No	
SQUARE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
STR	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	No	
STRING_AGG	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	Y	Y	Y	Y	N	N	N	N	N	N	N	No	
STRING_SPLIT	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
SUSER_SID	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
SUSER_SNAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
SWITCHOFFSET	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
SYSTEM_USER	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
TIMEFROMPARTS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	No	
TODATETIMEOFFSET	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
TO_CHAR	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
TRIGGER_NESTLEVEL (without arguments only)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
TRY_CONVERT	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
TYPE_ID	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	

T-SQL Built-in functions	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	**1.0**
TYPE_NAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No
UPDATE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes

T-SQL INFORMATION_SCHEMA catalogs

In the following table, you can find T-SQL INFORMATION_SCHEMA catalogs supported by different Babelfish versions.

T-SQL INFORMATION_SCHEMA catalogs	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	**1.0**
CHECK_CONSTRAINTS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No
COLUMN_DOMAIN_USAGE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No
COLUMNS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
CONSTRAINT_COLUMN_USAGE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
DOMAINS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
KEY_COLUMN_USAGE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No
ROUTINES	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No
TABLES	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
TABLE_CONSTRAINTS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes

T-SQL INFORMATION_SCHEMA catalogs	5.5	5.4	4.4	4.4	4.4	4.4	4.4	4.4	4.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.1	1.0
VIEWS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes

T-SQL System-defined @@ variables

In the following table, you can find T-SQL System-defined @@ variables supported by different Babelfish versions.

T-SQL System-defined @@ variables	5.5	5.4	4.4	4.4	4.4	4.4	4.4	4.4	4.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.1	1.0
@@CURSOR_ROWS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@DATEFIRST	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@DBTS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@ERROR	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@ERROR=213	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@FETCH_STATUS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@IDENTITY	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@LANGUAGE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@LOCK_TIMEOUT	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@MAX_CONNECTIONS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@MAX_PRECISION	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes

T-SQL System-defined @@ variables	5.5.4	4.4.4	4.4.4	4.4.3	3.3.3	3.3.3	3.3.3	3.3.3	2.2.2	2.2.2	2.2.2	2.2.2	2.2.2	2.2.2	2.2.2	2.2.2	2.1.0
@@MICROSOFTVERSION	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@NESTLEVEL	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@PROCID	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@ROWCOUNT	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@SERVERNAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@SERVICENAME	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@SPID	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@TRANCOUNT	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
@@VERSION (note format difference as described in T-SQL differences in Babelfish.	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes

T-SQL System stored procedures

In the following table, you can find T-SQL System stored procedures supported by different Babelfish versions.

T-SQL System stored procedures	5.5.4	4.4.4	4.4.4	4.4.3	3.3.3	3.3.3	3.3.3	3.3.3	2.2.2	2.2.2	2.2.2	2.2.2	2.2.2	2.2.2	2.2.2	2.2.2	2.1.0
sp_addextendedproperty	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No
sp_addlinkedserver	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No

T-SQL System stored procedures	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
sp_addlinkedsrvlogin	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
sp_addrole	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
sp_addrolemember	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
sp_babelfish_volatility	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
sp_column_privileges	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_columns	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_columns_100	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_columns_managed	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_cursor	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_cursor_list	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_cursorclose	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_cursorexecute	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_cursorfetch	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_cursoropen	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_cursoroption	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_cursorprepare	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_cursorprepexec	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL System stored procedures	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
sp_cursorunprepare	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_databases	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_datatype_info	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_datatype_info_100	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_describe_cursor	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_describe_first_result_set	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_describe_undeclared_parameters	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_dropextendedproperty	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No	
sp_droplinkedsrvlogin	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
sp_droprole	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
sp_droprolemember	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
sp_dropserver	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N		No	
sp_enum_oledb_providers	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No	
sp_execute	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_execute_postgresql(CREATE, ALTER, DROP)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No	

T-SQL System stored procedures	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
sp_executesql	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_fkeys	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_getapplock	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_helpdb	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_helpdbfixedrole	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
sp_helplinkedsrvlogin	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No	
sp_helprole	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_helprolemember	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_helpsrvrolemember	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
sp_helpuser	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_linkedservers	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N		No	
sp_oledb_ro_usrname	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_pkeys	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_prefix	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
sp_prepare	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_procedure_params_100_managed	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sp_releaseapplock	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL System stored procedures	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
sp_rename	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
sp_renamedb	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sp_rename (for object_type 'DATABASE')	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sp_reset_connection	Y	Y	Y	Y	Y	N	N	N	N	Y	Y	Y	N	N	N	N	N	N	N	Y	Y	Y	N	N	N	N	N	N	N	N	No	
sp_serveroption(connect_timeout option)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No	
sp_set_session_context	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
sp_special_columns	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_sproc_columns	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_sproc_columns_100	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_statistics	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_statistics_100	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_stored_procedures	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_table_privileges	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_tablecollations_100	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sp_tables	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL System stored procedures	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
sp_testlinkedserver	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No
sp_unprepare	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
sp_update extendedproperty	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No
sp_who	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No
xp_qv	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes

T-SQL Properties supported on the CONNECTIONPROPERTY system function

In the following table, you can find T-SQL Properties supported on the CONNECTIONPROPERTY system functions supported by different Babelfish versions.

T-SQL Properties supported on the CONNECTIONPROPERTY system function	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
auth_scheme	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
client_net_address	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
local_net_address	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
local_tcp_port	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
net_transport	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
protocol_type	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
physical_net_transport	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes

T-SQL Properties supported on the OBJECTPROPERTY system function

In the following table, you can find T-SQL Properties supported on the OBJECTPROPERTY system functions supported by different Babelfish versions.

T-SQL Properties supported on the OBJECTPROPERTY system function	5.5.0	5.4.0	4.4.0	4.3.3	4.3.2	4.3.1	4.2.0	4.1.0	4.0.0	3.4.0	3.3.0	3.2.0	3.1.0	3.0.0	2.4.0	2.3.0	2.2.0	2.1.0	1.2.0	1.1.0	1.0.0	0.9.0	0.8.0	0.7.0	0.6.0	0.5.0	0.4.0	0.3.0	0.2.0	0.1.0	
IsInlineFunction	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
IsScalarFunction	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
IsTableFunction	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes

T-SQL Properties supported on the SERVERPROPERTY function

In the following table, you can find T-SQL Properties supported on the SERVERPROPERTY functions supported by different Babelfish versions.

T-SQL Properties supported on the SERVERPROPERTY function	5.5.0	5.4.0	4.4.0	4.3.3	4.3.2	4.3.1	4.2.0	4.1.0	4.0.0	3.4.0	3.3.0	3.2.0	3.1.0	3.0.0	2.4.0	2.3.0	2.2.0	2.1.0	1.2.0	1.1.0	1.0.0	0.9.0	0.8.0	0.7.0	0.6.0	0.5.0	0.4.0	0.3.0	0.2.0	0.1.0	
Babelfish	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
Collation	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
CollationID	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
Edition	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
EditionID	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
EngineEdition	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
InstanceName	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No

T-SQL Properties supported on the SERVERPROPERTY function	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
IsAdvancedAnalyticsInstalled	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
IsBigDataCluster	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
IsFullTextInstalled	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
IsIntegratedSecurityOnly	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
IsLocalDB	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
IsPolyBaseInstalled	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
IsSingleUser	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
IsXTPSupported	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
Japanese_CI_AI	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
Japanese_CI_AS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
Japanese_CS_AS	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
LicenseType	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
MachineName	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	No	
ProductLevel	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
ProductMajorVersion	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
ProductMinorVersion	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

T-SQL Properties supported on the SERVERPROPERTY function	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
ProductUpdateLevel	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
ProductVersion	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
ServerName	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

SQL Server views supported by Babelfish

In the following table, you can find SQL Server views supported by different Babelfish versions.

SQL Server views supported by Babelfish	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
information_schema.key_column_usage	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No
information_schema.routines	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
information_schema.schemata	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
information_schema.sequences	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	No	
sys.all_columns	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.all_objects	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.all_parameters	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No		
sys.all_sql_modules	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

SQL Server views supported by Babelfish	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
sys.all_views	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.columns	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.configurations	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.data_spaces	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.database_files	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.database_mirroring	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.database_principals	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.database_role_members	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.databases	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.destination_data_spaces	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sys.dm_exec_connections	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.dm_exec_sessions	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.dm_hadr_database_replica_states	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.dm_os_host_info	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.dm_os_sys_info	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	

SQL Server views supported by Babelfish	5	5	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2.0	1.0
sys.endpoints	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.extended_properties	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	
sys.indexes	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.partitions	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sys.partition_functions	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sys.partition_parameters	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sys.partition_range_values	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sys.partition_schemes	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sys.schemas	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.server_principals	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.server_role_members	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	No	
sys.sql_modules	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.sysconfigures	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.syscurconfigs	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	
sys.syslogins	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	No	
sys.sysprocesses	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes	

SQL Server views supported by Babelfish	5.5	5.4	4.4	4.4	4.4	4.4	4.4	4.4	3.4	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.1	2.0
sys.sysusers	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	No
sys.table_types	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
sys.tables	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
sys.types	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	No
sys.xml_schema_collections	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
syslanguages	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Yes
sysobjects.crdate	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	No

Unsupported functionalities in Babelfish

In the following table and lists, you can find functionality that isn't currently supported in Babelfish. Updates to Babelfish are included in Aurora PostgreSQL versions. For more information, see the *Release Notes for Aurora PostgreSQL*.

Topics

- Functionality that isn't currently supported
- Settings that aren't supported
- Commands that aren't supported
- Column names or attributes that aren't supported
- Data types that aren't supported
- Object types that aren't supported
- Functions that aren't supported
- Syntax that isn't supported

Functionality that isn't currently supported

In the table you can find information about certain functionality that isn't currently supported.

Functionality or syntax	Description
Assembly modules and SQL Common Language Runtime (CLR) routines	Functionality related to assembly modules and CLR routines isn't supported.
Column attributes	ROWGUIDCOL, SPARSE, FILESTREAM, and MASKED aren't supported.
Contained databases	Contained databases with logins authenticated at the database level rather than at the server level aren't supported.
Cross-database DDL	Performing DDL statements that reference or operate on objects across multiple databases isn't yet supported.
Cursors (updatable)	Updatable cursors aren't supported.
Cursors (global)	GLOBAL cursors aren't supported.
Cursor (fetch behaviors)	The following cursor fetch behaviors aren't supported: FETCH PRIOR, FIRST, LAST, ABSOLUTE, abd RELATIVE
Cursor-typed output parameters	Cursor-typed variables and parameters aren't supported for output parameters (an error is raised).
Cursor options	SCROLL, KEYSET, DYNAMIC, FAST_FORWARD, SCROLL_LOCKS, OPTIMISTIC, TYPE_WARNING, and FOR UPDATE
Data-tier applications (DAC)	Data-tier applications (DAC) import or export operations with DAC package (.dacpac) or DAC backup (.bacpac) files aren't supported.
DBCC commands	Microsoft SQL Server Database Console Commands (DBCC) aren't supported. DBCC CHECKIDENT is supported in Babelfish 3.4.0 and higher releases.

Functionality or syntax	Description
DROP IF EXISTS	This syntax isn't supported for USER and SCHEMA objects. It's supported for the objects TABLE, VIEW, PROCEDURE, FUNCTION, and DATABASE.
ENCRYPT_CLIENT_CERT connections	Client certificate connections aren't supported.
EXECUTE AS statement	This statement isn't supported.
EXECUTE AS SELF clause	This clause isn't supported in functions, procedures, or trigger s.
EXECUTE AS USER clause	This clause isn't supported in functions, procedures, or trigger s.
Foreign key constraints referencing database name	Foreign key constraints that reference the database name aren't supported.
FORMAT	User-defined types aren't supported.
Function calls that include DEFAULT as a parameter v alue	DEFAULT isn't a supported parameter value for a function call. DEFAULT as a parameter value for a function call is supported from Babelfish 3.4.0 and higher releases.
Functions, externally defined	External functions, including SQL CLR functions, aren't sup ported.
Global temporary tables (tables with names that start with ##)	Global temporary tables aren't supported.
Graph functionality	All SQL graph functionality isn't supported.

Functionality or syntax	Description
General Extended stored procedures	System stored procedures that provide an interface from an instance of SQL Server to external programs, for various maintenance activities aren't supported. This includes `xp_cmdshell` and other system stored procedures. For more information, see General Extended stored procedures.
Identifiers, table or column names that contain @ or]] characters	Table or column names that contain an @ sign or square brackets aren't supported.
Inline indexes	Inline indexes aren't supported.
Invoking a procedure whose name is in a variable	Using a variable as a procedure name isn't supported.
Materialized views	Materialized views aren't supported.
NOT FOR REPLICATION clause	This syntax is accepted and ignored.
ODBC escape functions	ODBC escape functions aren't supported.
Procedure and function declarations with more than 100 parameters	Declarations with more than 100 parameters aren't supported.
Procedures, externally defined	Externally defined procedures, including SQL CLR procedures, aren't supported.
Procedure versioning	Procedure versioning isn't supported.
Procedures WITH RECOMPILE	WITH RECOMPILE (when used in conjunction with the DECLARE and EXECUTE statements) isn't supported.

Functionality or syntax	Description
Remote object references	Executing stored procedures against Babelfish linked servers isn't supported. Four-part object names work only for reading and doesn't work for modifying the remote table. An UPDATE can reference a remote table in the FROM clause without modifying it. For more information, see Babelfish supports linked servers.
Row-level security	Row-level security with CREATE SECURITY POLICY and inline table-valued functions isn't supported.
Service broker functionality	Service broker functionality isn't supported.
SESSIONPROPERTY	Unsupported properties: ANSI_NULLS, ANSI_PADDING, ANSI_WARNINGS, ARITHABORT, CONCAT_NULL_YIELDS_NULL, and NUMERIC_ROUNDABORT
SET LANGUAGE	This syntax isn't supported with any value other than `english` or `us_english` .
SP_CONFIGURE	This system stored procedure isn't supported.
SQL keyword SPARSE	The keyword SPARSE is accepted and ignored.
Table value constructor syntax (FROM clause)	The unsupported syntax is for a derived table constructed with the FROM clause.
Temporal tables	Temporal tables aren't supported.
Temporary procedures aren't dropped automatically	This functionality isn't supported.
Triggers, externally defined	These triggers aren't supported, including SQL Common Language Runtime (CLR).

Settings that aren't supported

The following settings aren't supported:

- SET ANSI_NULL_DFLT_OFF ON
- SET ANSI_NULL_DFLT_ON OFF
- SET ANSI_PADDING OFF
- SET ANSI_WARNINGS OFF
- SET ARITHABORT OFF
- SET ARITHIGNORE ON
- SET CURSOR_CLOSE_ON_COMMIT ON
- SET NUMERIC_ROUNDABORT ON
- SET PARSEONLY ON (command doesn't work as expected)
- SET FMTONLY ON (command doesn't work as expected. It suppresses only the execution of SELECT statements but not others.)

Commands that aren't supported

Certain functionality for the following commands isn't supported:

- ADD SIGNATURE
- ALTER DATABASE, ALTER DATABASE SET
- BACKUP/RESTORE DATABASE/LOG
- BACPAC and DACPAC FILES RESTORE
- CREATE, ALTER, DROP AUTHORIZATION. ALTER AUTHORIZATION is supported for database objects.
- CREATE, ALTER, DROP AVAILABILITY GROUP
- CREATE, ALTER, DROP BROKER PRIORITY
- CREATE, ALTER, DROP COLUMN ENCRYPTION KEY
- CREATE, ALTER, DROP DATABASE ENCRYPTION KEY
- CREATE, ALTER, DROP, BACKUP CERTIFICATE
- CREATE AGGREGATE
- CREATE CONTRACT
- CHECKPOINT

Column names or attributes that aren't supported

The following column names aren't supported:

- $IDENTITY
- $ROWGUID
- IDENTITYCOL

Data types that aren't supported

The following data types aren't supported:

- HIERARCHYID

Object types that aren't supported

The following object types aren't supported:

- COLUMN MASTER KEY
- CREATE, ALTER EXTERNAL DATA SOURCE
- CREATE, ALTER, DROP DATABASE AUDIT SPECIFICATION
- CREATE, ALTER, DROP EXTERNAL LIBRARY
- CREATE, ALTER, DROP SERVER AUDIT
- CREATE, ALTER, DROP SERVER AUDIT SPECIFICATION
- CREATE, ALTER, DROP, OPEN/CLOSE SYMMETRIC KEY
- CREATE, DROP DEFAULT
- CREDENTIAL
- CRYPTOGRAPHIC PROVIDER
- DIAGNOSTIC SESSION
- Indexed views
- SERVICE MASTER KEY
- SYNONYM

Functions that aren't supported

The following built-in functions aren't supported:

Aggregate functions

- APPROX_COUNT_DISTINCT
- CHECKSUM_AGG
- GROUPING_ID
- STRING_AGG using the WITHIN GROUP clause

Cryptographic functions

- CERTENCODED function
- CERTID function
- CERTPROPERTY function

Metadata functions

- COLUMNPROPERTY
- TYPEPROPERTY
- SERVERPROPERTY function – The following properties aren't supported:
  - BuildClrVersion
  - ComparisonStyle
  - ComputerNamePhysicalNetBIOS
  - HadrManagerStatus
  - InstanceDefaultDataPath
  - InstanceDefaultLogPath
  - IsClustered
  - IsHadrEnabled
  - LCID
  - NumLicenses
  - ProcessID
  - ProductBuild

- ProductBuildType
- ProductUpdateReference
- ResourceLastUpdateDateTime
- ResourceVersion
- ServerName
- SqlCharSet
- SqlCharSetName
- SqlSortOrder
- SqlSortOrderName
- FilestreamShareName
- FilestreamConfiguredLevel
- FilestreamEffectiveLevel

Security functions

- CERTPRIVATEKEY
- LOGINPROPERTY

Statements, operators, other functions

- EVENTDATA function
- GET_TRANSMISSION_STATUS

Syntax that isn't supported

The following syntax isn't supported:

- ALTER DATABASE
- ALTER DATABASE SCOPED CONFIGURATION
- ALTER DATABASE SCOPED CREDENTIAL
- ALTER DATABASE SET HADR
- ALTER INDEX
- ALTER PARTITION FUNCTION

- ALTER PARTITION SCHEME
- ALTER SCHEMA
- ALTER SERVER CONFIGURATION
- ALTER SERVICE, BACKUP/RESTORE SERVICE MASTER KEY clause
- BEGIN CONVERSATION TIMER
- BEGIN DISTRIBUTED TRANSACTION
- BEGIN DIALOG CONVERSATION
- BULK INSERT
- CREATE COLUMNSTORE INDEX
- CREATE EXTERNAL FILE FORMAT
- CREATE EXTERNAL TABLE
- CREATE, ALTER, DROP APPLICATION ROLE
- CREATE, ALTER, DROP ASSEMBLY
- CREATE, ALTER, DROP ASYMMETRIC KEY
- CREATE, ALTER, DROP CREDENTIAL
- CREATE, ALTER, DROP CRYPTOGRAPHIC PROVIDER
- CREATE, ALTER, DROP ENDPOINT
- CREATE, ALTER, DROP EVENT SESSION
- CREATE, ALTER, DROP EXTERNAL LANGUAGE
- CREATE, ALTER, DROP EXTERNAL RESOURCE POOL
- CREATE, ALTER, DROP FULLTEXT CATALOG
- CREATE, ALTER, DROP FULLTEXT INDEX
- CREATE, ALTER, DROP FULLTEXT STOPLIST
- CREATE, ALTER, DROP MESSAGE TYPE
- CREATE, ALTER, DROP, OPEN/CLOSE, BACKUP/RESTORE MASTER KEY
- CREATE, ALTER, DROP QUEUE
- CREATE, ALTER, DROP RESOURCE GOVERNOR
- CREATE, ALTER, DROP RESOURCE POOL
- CREATE, ALTER, DROP ROUTE
- CREATE, ALTER, DROP SEARCH PROPERTY LIST

- CREATE, ALTER, DROP SECURITY POLICY
- CREATE, ALTER, DROP SELECTIVE XML INDEX clause
- CREATE, ALTER, DROP SERVICE
- CREATE, ALTER, DROP TYPE
- CREATE, ALTER, DROP XML INDEX
- CREATE, ALTER, DROP XML SCHEMA COLLECTION
- CREATE/DROP RULE
- CREATE, DROP WORKLOAD CLASSIFIER
- CREATE, ALTER, DROP WORKLOAD GROUP
- ALTER TRIGGER
- CREATE TABLE... GRANT clause
- CREATE TABLE... IDENTITY clause
- CREATE USER – This syntax isn't supported. The PostgreSQL statement CREATE USER doesn't create a user that is equivalent to the SQL Server CREATE USER syntax. For more information, see T-SQL differences in Babelfish.
- DENY
- END, MOVE CONVERSATION
- EXECUTE with AS LOGIN or AT option
- GET CONVERSATION GROUP
- GROUP BY ALL clause
- GROUP BY CUBE clause
- GROUP BY ROLLUP clause
- INSERT... DEFAULT VALUES
- MERGE
- READTEXT
- REVERT
- SELECT TOP... WITH TIES
- SELECT... FOR BROWSE
- SELECT... FOR XML EXPLICIT
- SEND
- SET DATEFORMAT

- SET DEADLOCK_PRIORITY
- SET FMTONLY
- SET FORCEPLAN
- SET NUMERIC_ROUNDABORT ON
- SET OFFSETS
- SET REMOTE_PROC_TRANSACTIONS
- SET SHOWPLAN_TEXT
- SET SHOWPLAN_XML
- SET STATISTICS
- SET STATISTICS PROFILE
- SET STATISTICS TIME
- SET STATISTICS XML
- SHUTDOWN statement
- UPDATE STATISTICS
- UPDATETEXT
- Using EXECUTE to call a SQL function
- VIEW... CHECK OPTION clause
- VIEW... VIEW_METADATA clause
- WAITFOR DELAY
- WAITFOR TIME
- WAITFOR, RECEIVE
- WITH XMLNAMESPACES construct
- WRITETEXT
- XPATH expressions

Working with Babelfish for Aurora PostgreSQL procedures

Overview

You can use the following procedure for Amazon RDS DB instances running Babelfish for Aurora PostgreSQL for a better query performance:

- sp_babelfish_volatility
- sp_execute_postgresql

sp_babelfish_volatility

PostgreSQL function volatility helps the optimizer for a better query execution which when used in parts of certain clauses has a significant impact on query performance.

Syntax

```
sp_babelfish_volatility 'function_name', 'volatility'
```

Arguments

function_name (optional)

You can either specify the value of this argument with a two-part name as `schema_name.function_name`or only the `function_name`. If you specify only the `function_name`, the schema name is the default schema for the current user.

volatility (optional)

The valid PostgreSQL values of volatility are `stable`, `volatile`, or `immutable`. For more information, see https://www.postgresql.org/docs/current/xfunc-volatility.html

> **Note**
>
> When `sp_babelfish_volatility` is called with `function_name` which has multiple definitions, it will throw an error.

Result set

If the parameters are not mentioned then the result set is displayed under the following columns: `schemaname`, `functionname`, `volatility`.

Usage notes

PostgreSQL function volatility helps the optimizer for a better query execution which when used in parts of certain clauses has a significant impact on query performance.

Examples

The following examples shows how to create simple functions and later explains how to use `sp_babelfish_volatility` on these functions using different methods.

```
1> create function f1() returns int as begin return 0 end
2> go
```

```
1> create schema test_schema
2> go
```

```
1> create function test_schema.f1() returns int as begin return 0 end
2> go
```

The following example displays volatility of the functions:

```
1> exec sp_babelfish_volatility
2> go

schemaname  functionname volatility
----------- ------------ ----------
dbo         f1           volatile
test_schema f1           volatile
```

The following example shows how to change the volatility of the functions:

```
1> exec sp_babelfish_volatility 'f1','stable'
2> go
1> exec sp_babelfish_volatility 'test_schema.f1','immutable'
2> go
```

When you specify only the function_name, it displays the schema name, function name and volatility of that function. The following example displays volatility of functions after changing the values:

```
1> exec sp_babelfish_volatility 'test_schema.f1'
2> go

schemaname  functionname volatility
----------- ------------ ----------
test_schema f1           immutable
```

```
1> exec sp_babelfish_volatility 'f1'
2> go

schemaname  functionname volatility
----------- ------------ ----------
dbo         f1           stable
```

When you don't specify any argument, it displays a list of functions (schema name, function name, volatility of the functions) present in the current database:

```
1> exec sp_babelfish_volatility
2> go

schemaname  functionname volatility
----------- ------------ ----------
dbo         f1           stable
test_schema f1           immutable
```

sp_execute_postgresql

You can execute PostgreSQL statements from T-SQL endpoint. This simplifies your applications as you don’t need to exit T-SQL port to execute these statements.

Syntax

```
sp_execute_postgresql [ @stmt = ] statement
```

Arguments

[@stmt] statement

The argument is of datatype varchar. This argument accept PG dialect statements.

> **Note**
>
> You can only pass one PG dialect statement as an argument otherwise it will raise the following error.

```
1>exec sp_execute_postgresql 'create extension pg_stat_statements; drop extension
 pg_stat_statements'
2>go
```

```
Msg 33557097, Level 16, State 1, Server BABELFISH, Line 1
expected 1 statement but got 2 statements after parsing
```

Usage notes

CREATE EXTENSION

Creates and loads a new extension into the current database.

```
1>EXEC sp_execute_postgresql 'create extension [ IF NOT EXISTS ] <extension name>
 [ WITH ] [SCHEMA schema_name] [VERSION version]';
2>go
```

The following example shows how to create an extension:

```
1>EXEC sp_execute_postgresql 'create extension pg_stat_statements with schema sys
 version "1.10"';
2>go
```

Use the following command to access extension objects:

```
1>select * from pg_stat_statements;
2>go
```

> **Note**
>
> If schema name is not provided explicitly during extension creation, by default the extensions are installed in the public schema. You must provide the schema qualifier to access the extension objects as mentioned below:

```
1>select * from [public].pg_stat_statements;
2>go
```

Supported extensions

The following extensions available with Aurora PostgreSQL works with Babelfish.

- `pg_stat_statements`
- `tds_fdw`
- `fuzzystrmatch`

Limitations

- Users need to have sysadmin role on T-SQL and rds_superuser on postgres to install the extenstions.
- Extensions cannot be installed in user created schemas and also in dbo and guest schemas for master, tempdb and msdb database.
- CASCADE option is not supported.

ALTER EXTENSION

You can upgrade to a new extension version using ALTER extension.

```
1>EXEC sp_execute_postgresql 'alter extension <extension name> UPDATE TO
 <new_version>';
2>go
```

Limitations

- You can upgrade the version of your extension only using the ALTER Extension statement. Other operations aren't supported.

DROP EXTENSION

Drops the specified extension. You can also use `if exists` or `restrict` options to drop the extension.

```
1>EXEC sp_execute_postgresql 'drop extension <extension name>';
2>go
```

Limitations

- CASCADE option is not supported.

Babelfish supports XML datatype methods

Starting with version 4.4.0, Babelfish now supports the xml datatype method .EXIST().

Starting with version 5.4.0, Babelfish now supports stored procedures sp_xml_preparedocument and sp_xml_removedocument, rowset function OPENXML() and xml datatype method .VALUE().

Starting with version 5.7.0, Babelfish now supports the xml datatype method .QUERY().

With these functions and procedures querying on XML data becomes much easier.

Understanding XML procedures and methods

- **sp_xml_preparedocument** – The procedure sp_xml_preparedocument parses an XML text given as input and returns a handle to this document. This handle is valid during the session or until it is removed by sp_xml_removedocument.
- **sp_xml_removedocument** – The procedure sp_xml_removedocument invalidates the handle which was created by procedure sp_xml_preparedocument.
- **OPENXML()** – OPENXML provides a rowset view over an XML document. Since OPENXML is a rowset provider and it returns a set of rows, we can use OPENXML in the FROM clause just as we can use any other table, view, or table-valued function.
- **EXIST()** – XML Datatype method EXIST() is used to check whether an XQuery expression returns a nonempty result against an XML instance, and returns a bit (1 for true, 0 for false).
- **VALUE()** – XML Datatype method VALUE() is used to extract a value from an XML instance.
- **QUERY()** – XML Datatype method QUERY() is used to query an XML instance and returns the result as untyped XML.

Limitations in Babelfish XML procedures and methods

- Babelfish only supports XPATH 1.0 syntax for second argument (that is, ROWPATTERN) of OPENXML().
- The meta-properties and flag 8 are not currently supported in OPENXML().
- Babelfish only supports XPATH 1.0 syntax for the XQuery argument of the EXIST(), VALUE() and QUERY() datatype methods.
- XML datatype methods EXIST(), VALUE() and QUERY() require the XML instance to be a well-formed XML document (single root element), invoking them on an XML content (multiple top-

level elements) is currently not supported. This difference is due to a more strict handling of XML documents in PostgreSQL.

Performance and scaling for Amazon Aurora PostgreSQL

The following section discusses managing performance and scaling for an Amazon Aurora PostgreSQL DB cluster. It also includes information about other maintenance tasks.

Topics

- Scaling Aurora PostgreSQL DB instances
- Maximum connections to an Aurora PostgreSQL DB instance
- Temporary storage limits for Aurora PostgreSQL
- Huge pages for Aurora PostgreSQL
- Testing Amazon Aurora PostgreSQL by using fault injection queries
- Displaying volume status for an Aurora PostgreSQL DB cluster
- Specifying the RAM disk for the stats_temp_directory
- Managing temporary files with PostgreSQL

Scaling Aurora PostgreSQL DB instances

You can scale Aurora PostgreSQL DB instances in two ways, instance scaling and read scaling. For more information about read scaling, see Read scaling.

You can scale your Aurora PostgreSQL DB cluster by modifying the DB instance class for each DB instance in the DB cluster. Aurora PostgreSQL supports several DB instance classes optimized for Aurora. Don't use db.t2 or db.t3 instance classes for larger Aurora clusters of size greater than 40 terabytes (TB).

> **Note**
>
> We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more details on the T instance classes, see DB instance class types.

Scaling isn't instantaneous. It can take 15 minutes or more to complete the change to a different DB instance class. If you use this approach to modify the DB instance class, you apply the change during the next scheduled maintenance window (rather than immediately) to avoid affecting users.

As an alternative to modifying the DB instance class directly, you can minimize downtime by using the high availability features of Amazon Aurora. First, add an Aurora Replica to your cluster. When creating the replica, choose the DB instance class size that you want to use for your cluster. When the Aurora Replica is synchronized with the cluster, you then failover to the newly added Replica. To learn more, see Aurora Replicas and Fast failover with Amazon Aurora PostgreSQL.

For detailed specifications of the DB instance classes supported by Aurora PostgreSQL, see Supported DB engines for DB instance classes.

Maximum connections to an Aurora PostgreSQL DB instance

An Aurora PostgreSQL DB cluster allocates resources based on the DB instance class and its available memory. Each connection to the DB cluster consumes incremental amounts of these resources, such as memory and CPU. Memory consumed per connection varies based on query type, count, and whether temporary tables are used. Even an idle connection consumes memory and CPU. That's because when queries run on a connection, more memory is allocated for each query and it's not released completely, even when processing stops. Thus, we recommend that you make sure your applications aren't holding on to idle connections: each one of these wastes resources and affects performance negatively. For more information, see Resources consumed by idle PostgreSQL connections.

The maximum number of connections allowed by an Aurora PostgreSQL DB instance is determined by the `max_connections` parameter value specified in the parameter group for that DB instance. The ideal setting for the `max_connections` parameter is one that supports all the client connections your application needs, without an excess of unused connections, plus at least 3 more connections to support Amazon automation. Before modifying the `max_connections` parameter setting, we recommend that you consider the following:

- If the `max_connections` value is too low, the Aurora PostgreSQL DB instance might not have sufficient connections available when clients attempt to connect. If this happens, attempts to connect using `psql` raise error messages such as the following:

```
psql: FATAL: remaining connection slots are reserved for non-replication superuser
 connections
```

- If the `max_connections` value exceeds the number of connections that are actually needed, the unused connections can cause performance to degrade.

The default value of `max_connections` is derived from the following Aurora PostgreSQL `LEAST` function:

`LEAST({DBInstanceClassMemory/9531392},5000)`.

If you want to change the value for `max_connections`, you need to create a custom DB cluster parameter group and change its value there. After applying your custom DB parameter group to your cluster, be sure to reboot the primary instance so the new value takes effect. For more information, see Amazon Aurora PostgreSQL parameters and Creating a DB cluster parameter groupin Amazon Aurora.

> **Tip**
>
> If your applications frequently open and close connections, or keep a large number of long-lived connections open, we recommend that you use Amazon RDS Proxy. RDS Proxy is a fully managed, highly available database proxy that uses connection pooling to share database connections securely and efficiently. To learn more about RDS Proxy, see Amazon RDS Proxy for Aurora.

For details about how Aurora serverless instances handle this parameter, see Maximum connections for Aurora serverless.

Temporary storage limits for Aurora PostgreSQL

Aurora PostgreSQL stores tables and indexes in the Aurora storage subsystem. Aurora PostgreSQL uses separate temporary storage for non-persistent temporary files. This includes files that are used for such purposes as sorting large data sets during query processing or for index build operations. For more information, see the article How can I troubleshoot local storage issues in Aurora PostgreSQL-Compatible instances?.

These local storage volumes are backed by Amazon Elastic Block Store and can be extended by using a larger DB instance class. For more information about storage, see Amazon Aurora storage. You can also increase your local storage for temporary objects by using an NVMe enabled instance type and Aurora Optimized Reads-enabled temporary objects. For more information, see Improving query performance for Aurora PostgreSQL with Aurora Optimized Reads.

Note

You might see `storage-optimization` events when scaling DB instances, for example, from db.r5.2xlarge to db.r5.4xlarge.

The following table shows the maximum amount of temporary storage available for each Aurora PostgreSQL DB instance class. For more information on DB instance class support for Aurora, see Amazon AuroraDB instance classes.

DB instance class	Maximum temporary storage available (GiB)
db.x2g.16xlarge	1829
db.x2g.12xlarge	1606
db.x2g.8xlarge	1071
db.x2g.4xlarge	535
db.x2g.2xlarge	268
db.x2g.xlarge	134
db.x2g.large	67
db.r8g.48xlarge	3072
db.r8g.24xlarge	1536
db.r8g.16xlarge	998
db.r8g.12xlarge	749
db.r8g.8xlarge	499
db.r8g.4xlarge	250
db.r8g.2xlarge	125
db.r8g.xlarge	63

DB instance class	Maximum temporary storage available (GiB)
db.r8g.large	31
db.r7g.16xlarge	1008
db.r7g.12xlarge	756
db.r7g.8xlarge	504
db.r7g.4xlarge	252
db.r7g.2xlarge	126
db.r7g.xlarge	63
db.r7g.large	32
db.r7i.48xlarge	3072
db.r7i.24xlarge	1500
db.r7i.16xlarge	1008
db.r7i.12xlarge	748
db.r7i.8xlarge	504
db.r7i.4xlarge	249
db.r7i.2xlarge	124
db.r7i.xlarge	62
db.r7i.large	31
db.r6g.16xlarge	1008
db.r6g.12xlarge	756
db.r6g.8xlarge	504

DB instance class	Maximum temporary storage available (GiB)
db.r6g.4xlarge	252
db.r6g.2xlarge	126
db.r6g.xlarge	63
db.r6g.large	32
db.r6i.32xlarge	1829
db.r6i.24xlarge	1500
db.r6i.16xlarge	1008
db.r6i.12xlarge	748
db.r6i.8xlarge	504
db.r6i.4xlarge	249
db.r6i.2xlarge	124
db.r6i.xlarge	62
db.r6i.large	31
db.r5.24xlarge	1500
db.r5.16xlarge	1008
db.r5.12xlarge	748
db.r5.8xlarge	504
db.r5.4xlarge	249
db.r5.2xlarge	124
db.r5.xlarge	62

DB instance class	Maximum temporary storage available (GiB)
db.r5.large	31
db.r4.16xlarge	960
db.r4.8xlarge	480
db.r4.4xlarge	240
db.r4.2xlarge	120
db.r4.xlarge	60
db.r4.large	30
db.t4g.large	16.5
db.t4g.medium	8.13
db.t3.large	16
db.t3.medium	7.5

Note

NVMe enabled instance types can increase the temporary space available by up to the total NVMe size. For more information, see Improving query performance for Aurora PostgreSQL with Aurora Optimized Reads.

You can monitor the temporary storage available for a DB instance with the `FreeLocalStorage` CloudWatch metric, described in Amazon CloudWatch metrics for Amazon Aurora. (This doesn't apply to Aurora serverless.)

For some workloads, you can reduce the amount of temporary storage by allocating more memory to the processes that are performing the operation. To increase the memory available to an operation, increasing the values of the work_mem or maintenance_work_mem PostgreSQL parameters.

Huge pages for Aurora PostgreSQL

Huge pages are a memory management feature that reduces overhead when a DB instance is working with large contiguous chunks of memory, such as that used by shared buffers. This PostgreSQL feature is supported by all currently available Aurora PostgreSQL versions.

Huge_pages parameter is turned on by default for all DB instance classes other than t3.medium,db.t3.large,db.t4g.medium,db.t4g.large instance classes. You can't change the huge_pages parameter value or turn off this feature in the supported instance classes of Aurora PostgreSQL.

On Aurora PostgreSQL DB instances that don't support the huge pages memory feature, specific process memory usage might increase without corresponding workload changes.

The system allocates shared memory segments like the buffer cache during server startup. When huge memory pages aren't available, the system doesn't charge these allocations to the postmaster process. Instead, it includes the memory in the process that first accessed each 4KB page in the shared memory segment.

> **Note**
>
> Active connections share allocated memory as needed, regardless of how shared memory usage is tracked across processes.

Testing Amazon Aurora PostgreSQL by using fault injection queries

You can test the fault tolerance of your Aurora PostgreSQL DB cluster by using fault injection queries. Fault injection queries are issued as SQL commands to an Amazon Aurora instance. Fault injection queries let you crash the instance so that you can test failover and recovery. You can also simulate Aurora Replica failure, disk failure, and disk congestion. Fault injection queries are supported by all available Aurora PostgreSQL versions, as follows.

- Aurora PostgreSQL versions 12, 13, 14, and higher
- Aurora PostgreSQL version 11.7 and higher
- Aurora PostgreSQL version 10.11 and higher

Topics

- Testing an instance crash
- Testing an Aurora Replica failure
- Testing a disk failure
- Testing disk congestion

When a fault injection query specifies a crash, it forces a crash of the Aurora PostgreSQL DB instance. The other fault injection queries result in simulations of failure events, but don't cause the event to occur. When you submit a fault injection query, you also specify an amount of time for the failure event simulation to occur.

You can submit a fault injection query to one of your Aurora Replica instances by connecting to the endpoint for the Aurora Replica. For more information, see Amazon Aurora endpoint connections.

Testing an instance crash

You can force a crash of an Aurora PostgreSQL instance by using the fault injection query function `aurora_inject_crash()`.

For this fault injection query, a failover does not occur. If you want to test a failover, then you can choose the **Failover** instance action for your DB cluster in the RDS console, or use the failover-db-cluster Amazon CLI command or the FailoverDBCluster RDS API operation.

Syntax

```
SELECT aurora_inject_crash ('instance' | 'dispatcher' | 'node');
```

Options

This fault injection query takes one of the following crash types. The crash type is not case sensitive:

'instance'

A crash of the PostgreSQL-compatible database for the Amazon Aurora instance is simulated.

'dispatcher'

A crash of the dispatcher on the primary instance for the Aurora DB cluster is simulated. The *dispatcher* writes updates to the cluster volume for an Amazon Aurora DB cluster.

'node'

A crash of both the PostgreSQL-compatible database and the dispatcher for the Amazon Aurora instance is simulated.

Testing an Aurora Replica failure

You can simulate the failure of an Aurora Replica by using the fault injection query function `aurora_inject_replica_failure()`.

An Aurora Replica failure blocks replication to the Aurora Replica or all Aurora Replicas in the DB cluster by the specified percentage for the specified time interval. When the time interval completes, the affected Aurora Replicas are automatically synchronized with the primary instance.

Syntax

```
SELECT aurora_inject_replica_failure(
   percentage_of_failure,
   time_interval,
   'replica_name'
);
```

Options

This fault injection query takes the following parameters:

percentage_of_failure

The percentage of replication to block during the failure event. This value can be a double between 0 and 100. If you specify 0, then no replication is blocked. If you specify 100, then all replication is blocked.

time_interval

The amount of time to simulate the Aurora Replica failure. The interval is in seconds. For example, if the value is 20, the simulation runs for 20 seconds.

> **Note**
>
> Take care when specifying the time interval for your Aurora Replica failure event. If you specify too long an interval, and your writer instance writes a large amount of data

during the failure event, then your Aurora DB cluster might assume that your Aurora Replica has crashed and replace it.

replica_name

The Aurora Replica in which to inject the failure simulation. Specify the name of an Aurora Replica to simulate a failure of the single Aurora Replica. Specify an empty string to simulate failures for all Aurora Replicas in the DB cluster.

To identify replica names, see the `server_id` column from the `aurora_replica_status()` function. For example:

```
postgres=> SELECT server_id FROM aurora_replica_status();
```

Testing a disk failure

You can simulate a disk failure for an Aurora PostgreSQL DB cluster by using the fault injection query function `aurora_inject_disk_failure()`.

During a disk failure simulation, the Aurora PostgreSQL DB cluster randomly marks disk segments as faulting. Requests to those segments are blocked for the duration of the simulation.

Syntax

```
SELECT aurora_inject_disk_failure(
   percentage_of_failure,
   index,
   is_disk,
   time_interval
);
```

Options

This fault injection query takes the following parameters:

percentage_of_failure

The percentage of the disk to mark as faulting during the failure event. This value can be a double between 0 and 100. If you specify 0, then none of the disk is marked as faulting. If you specify 100, then the entire disk is marked as faulting.

index

A specific logical block of data in which to simulate the failure event. If you exceed the range of available logical blocks or storage nodes data, you receive an error that tells you the maximum index value that you can specify. To avoid this error, see Displaying volume status for an Aurora PostgreSQL DB cluster.

is_disk

Indicates whether the injection failure is to a logical block or a storage node. Specifying true means injection failures are to a logical block. Specifying false means injection failures are to a storage node.

time_interval

The amount of time to simulate the disk failure. The interval is in seconds. For example, if the value is 20, the simulation runs for 20 seconds.

Testing disk congestion

You can simulate a disk congestion for an Aurora PostgreSQL DB cluster by using the fault injection query function `aurora_inject_disk_congestion()`.

During a disk congestion simulation, the Aurora PostgreSQL DB cluster randomly marks disk segments as congested. Requests to those segments are delayed between the specified minimum and maximum delay time for the duration of the simulation.

Syntax

```
SELECT aurora_inject_disk_congestion(
   percentage_of_failure,
   index,
   is_disk,
   time_interval,
   minimum,
   maximum
);
```

Options

This fault injection query takes the following parameters:

percentage_of_failure

The percentage of the disk to mark as congested during the failure event. This is a double value between 0 and 100. If you specify 0, then none of the disk is marked as congested. If you specify 100, then the entire disk is marked as congested.

index

A specific logical block of data or storage node to use to simulate the failure event.

If you exceed the range of available logical blocks or storage nodes of data, you receive an error that tells you the maximum index value that you can specify. To avoid this error, see Displaying volume status for an Aurora PostgreSQL DB cluster.

is_disk

Indicates whether the injection failure is to a logical block or a storage node. Specifying true means injection failures are to a logical block. Specifying false means injection failures are to a storage node.

time_interval

The amount of time to simulate the disk congestion. The interval is in seconds. For example, if the value is 20, the simulation runs for 20 seconds.

minimum, maximum

The minimum and maximum amount of congestion delay, in milliseconds. Valid values range from 0.0 to 100.0 milliseconds. Disk segments marked as congested are delayed for a random amount of time within the minimum and maximum range for the duration of the simulation. The maximum value must be greater than the minimum value.

Displaying volume status for an Aurora PostgreSQL DB cluster

In Amazon Aurora, a DB cluster volume consists of a collection of logical blocks. Each of these represents 10 gigabytes of allocated storage. These blocks are called *protection groups*.

The data in each protection group is replicated across six physical storage devices, called *storage nodes*. These storage nodes are allocated across three Availability Zones (AZs) in the region where the DB cluster resides. In turn, each storage node contains one or more logical blocks of data for the DB cluster volume. For more information about protection groups and storage nodes, see Introducing the Aurora storage engine on the Amazon Database Blog. To learn more about Aurora cluster volumes in general, see Amazon Aurora storage.

Use the `aurora_show_volume_status()` function to return the following server status variables:

- `Disks` — The total number of logical blocks of data for the DB cluster volume.
- `Nodes` — The total number of storage nodes for the DB cluster volume.

You can use the `aurora_show_volume_status()` function to help avoid an error when using the `aurora_inject_disk_failure()` fault injection function. The `aurora_inject_disk_failure()` fault injection function simulates the failure of an entire storage node, or a single logical block of data within a storage node. In the function, you specify the index value of a specific logical block of data or storage node. However, the statement returns an error if you specify an index value greater than the number of logical blocks of data or storage nodes used by the DB cluster volume. For more information about fault injection queries, see Testing Amazon Aurora PostgreSQL by using fault injection queries.

> **Note**
>
> The `aurora_show_volume_status()` function is available for Aurora PostgreSQL version 10.11. For more information about Aurora PostgreSQL versions, see Amazon Aurora PostgreSQL releases and engine versions.

Syntax

```
SELECT * FROM aurora_show_volume_status();
```

Example

```
customer_database=> SELECT * FROM aurora_show_volume_status();
 disks | nodes
-------+-------
    96 |    45
```

Specifying the RAM disk for the stats_temp_directory

You can use the Aurora PostgreSQL parameter, `rds.pg_stat_ramdisk_size`, to specify the system memory allocated to a RAM disk for storing the PostgreSQL `stats_temp_directory`. The RAM disk parameter is only available in Aurora PostgreSQL 14 and lower versions.

Under certain workloads, setting this parameter can improve performance and decrease IO requirements. For more information about the `stats_temp_directory`, see Run-time Statistics in the PostgreSQL documentation. From PostgreSQL version 15, the PostgreSQL community switched to use dynamic shared memory. So, there is no need to set `stats_temp_directory`.

To enable a RAM disk for your `stats_temp_directory`, set the `rds.pg_stat_ramdisk_size` parameter to a non-zero value in the DB cluster parameter group used by your DB cluster. This parameter denotes MB, so you must use an integer value. Expressions, formulas, and functions aren't valid for the `rds.pg_stat_ramdisk_size` parameter. Be sure to restart the DB cluster so that the change takes effect. For information about setting parameters, see Parameter groups for Amazon Aurora. For more information about restarting the DB cluster, see Rebooting an Amazon Aurora DB cluster or Amazon Aurora DB instance.

As an example, the following Amazon CLI command sets the RAM disk parameter to 256 MB.

```
aws rds modify-db-cluster-parameter-group \
    --db-cluster-parameter-group-name db-cl-pg-ramdisk-testing \
    --parameters "ParameterName=rds.pg_stat_ramdisk_size, ParameterValue=256,
 ApplyMethod=pending-reboot"
```

After you restart the DB cluster, run the following command to see the status of the `stats_temp_directory`:

```
postgres=> SHOW stats_temp_directory;
```

The command should return the following:

```
stats_temp_directory
--------------------------
/rdsdbramdisk/pg_stat_tmp
(1 row)
```

Managing temporary files with PostgreSQL

In PostgreSQL, a complex query might perform several sort or hash operations at the same time, with each operation using instance memory to store results up to the value specified in the `work_mem` parameter. When the instance memory is not sufficient, temporary files are created to store the results. These are written to disk to complete the query execution. Later, these files are automatically removed after the query completes. In Aurora PostgreSQL, these files share local

storage with other log files. You can monitor your Aurora PostgreSQL DB cluster's local storage space by watching the Amazon CloudWatch metric for `FreeLocalStorage`. For more information, see Troubleshoot local storage issues.

Orphaned temporary files after a crash

PostgreSQL removes temporary files when the query completes or the session ends normally. A server process can also end abnormally, for example when the operating system stops it because of an out of memory (OOM) condition. When this happens, PostgreSQL stops all other server processes and performs crash recovery. By default, Aurora PostgreSQL doesn't remove temporary files during crash recovery. The files remain on your storage and consume space even though the process ID (PID) in the file name no longer exists. You can find these orphaned files by comparing the PIDs in the output of `pg_ls_tmpdir` with the PIDs in `pg_stat_activity`.
When you restart the DB instance, PostgreSQL removes orphaned temporary files.
If you want PostgreSQL to remove them during crash recovery instead, set the `remove_temp_files_after_crash` parameter to 1 in your DB cluster parameter group. This parameter is available in Aurora PostgreSQL 14 and higher, and it's dynamic. The new value applies at the next crash recovery and doesn't remove files that are already orphaned. For more information, see Modifying parameters in a DB cluster parameter group.

We recommend using Aurora Optimized Read clusters for workloads involving multiple concurrent queries that increase the usage of temporary files. These clusters use local Non-Volatile Memory Express (NVMe) based solid state drive (SSD) block-level storage to place the temporary files. For more information, see Improving query performance for Aurora PostgreSQL with Aurora Optimized Reads.

You can use the following parameters and functions to manage the temporary files in your instance.

- **`temp_file_limit`** – This parameter cancels any query exceeding the size of temp_files in KB. This limit prevents any query from running endlessly and consuming disk space with temporary files. You can estimate the value using the results from the `log_temp_files` parameter. As a best practice, examine the workload behavior and set the limit according to the estimation. The following example shows how a query is canceled when it exceeds the limit.

```
postgres=>select * from pgbench_accounts, pg_class, big_table;
```

```
ERROR: temporary file size exceeds temp_file_limit (64kB)
```

- **log_temp_files** – This parameter sends messages to the postgresql.log when the temporary files of a session are removed. This parameter produces logs after a query successfully completes. Therefore, it might not help in troubleshooting active, long-running queries.

  The following example shows that when the query successfully completes, the entries are logged in the postgresql.log file while the temporary files are cleaned up.

```
2023-02-06 23:48:35 UTC:205.251.233.182(12456):adminuser@postgres:[31236]:LOG:
 temporary file: path "base/pgsql_tmp/pgsql_tmp31236.5", size 140353536
2023-02-06 23:48:35 UTC:205.251.233.182(12456):adminuser@postgres:[31236]:STATEMENT:
  select a.aid from pgbench_accounts a, pgbench_accounts b where a.bid=b.bid order by
 a.bid limit 10;
2023-02-06 23:48:35 UTC:205.251.233.182(12456):adminuser@postgres:[31236]:LOG:
 temporary file: path "base/pgsql_tmp/pgsql_tmp31236.4", size 180428800
2023-02-06 23:48:35 UTC:205.251.233.182(12456):adminuser@postgres:[31236]:STATEMENT:
  select a.aid from pgbench_accounts a, pgbench_accounts b where a.bid=b.bid order by
 a.bid limit 10;
```

- **pg_ls_tmpdir** – This function that is available from RDS for PostgreSQL 13 and above provides visibility into the current temporary file usage. The completed query doesn't appear in the results of the function. In the following example, you can view the results of this function.

```
postgres=>select * from pg_ls_tmpdir();
```

```
      name       |    size    |      modification
-----------------+------------+------------------------
 pgsql_tmp8355.1 | 1072250880 | 2023-02-06 22:54:56+00
 pgsql_tmp8351.0 | 1072250880 | 2023-02-06 22:54:43+00
 pgsql_tmp8327.0 | 1072250880 | 2023-02-06 22:54:56+00
 pgsql_tmp8351.1 |  703168512 | 2023-02-06 22:54:56+00
 pgsql_tmp8355.0 | 1072250880 | 2023-02-06 22:54:00+00
```

```
 pgsql_tmp8328.1 |  835031040 | 2023-02-06 22:54:56+00
 pgsql_tmp8328.0 | 1072250880 | 2023-02-06 22:54:40+00
(7 rows)
```

```
postgres=>select query from pg_stat_activity where pid = 8355;

query
------------------------------------------------------------------------------------------
select a.aid from pgbench_accounts a, pgbench_accounts b where a.bid=b.bid order by
 a.bid
(1 row)
```

The file name includes the processing ID (PID) of the session that generated the temporary file. A more advanced query, such as in the following example, performs a sum of the temporary files for each PID.

```
postgres=>select replace(left(name, strpos(name, '.')-1),'pgsql_tmp','') as pid,
 count(*), sum(size) from pg_ls_tmpdir() group by pid;
```

```
 pid  | count |   sum
------+-------+------------------
 8355 |     2 | 2144501760
 8351 |     2 | 2090770432
 8327 |     1 | 1072250880
 8328 |     2 | 2144501760
(4 rows)
```

- **pg_stat_statements** – If you activate the pg_stat_statements parameter, then you can view the average temporary file usage per call. You can identify the query_id of the query and use it to examine the temporary file usage as shown in the following example.

```
postgres=>select queryid from pg_stat_statements where query like 'select a.aid from
 pgbench%';
```

```
       queryid
----------------------
 -7170349228837045701
```

```
(1 row)
```

```
postgres=>select queryid, substr(query,1,25), calls, temp_blks_read/calls
 temp_blks_read_per_call, temp_blks_written/calls temp_blks_written_per_call from
 pg_stat_statements where queryid = -7170349228837045701;
```

```
       queryid        |          substr           | calls | temp_blks_read_per_call |
 temp_blks_written_per_call
----------------------+---------------------------+-------+-------------------------
+---------------------------
 -7170349228837045701 | select a.aid from pgbench |    50 |                  239226 |
                     388678
(1 row)
```

- **Performance Insights** – In the Performance Insights dashboard, you can view temporary file usage by turning on the metrics **temp_bytes** and **temp_files**. Then, you can see the average of both of these metrics and see how they correspond to the query workload. The view within Performance Insights doesn't show specifically the queries that are generating the temporary files. However, when you combine Performance Insights with the query shown for `pg_ls_tmpdir`, you can troubleshoot, analyze, and determine the changes in your query workload.

  For more information about how to analyze metrics and queries with Performance Insights, see Database Insights.


  For an example of viewing temporary file usage with Performance Insights, see Viewing temporary file usage with Performance Insights

Viewing temporary file usage with Performance Insights

You can use Performance Insights to view temporary file usage by turning on the metrics **temp_bytes** and **temp_files**. The view in Performance Insights doesn't show the specific queries that generate temporary files, however, when you combine Performance Insights with the query shown for `pg_ls_tmpdir`, you can troubleshoot, analyze, and determine the changes in your query workload.

1. In the Performance Insights dashboard, choose **Manage Metrics**.


2. Choose **Database metrics**, and select the **temp_bytes** and **temp_files** metrics as shown in the following image.

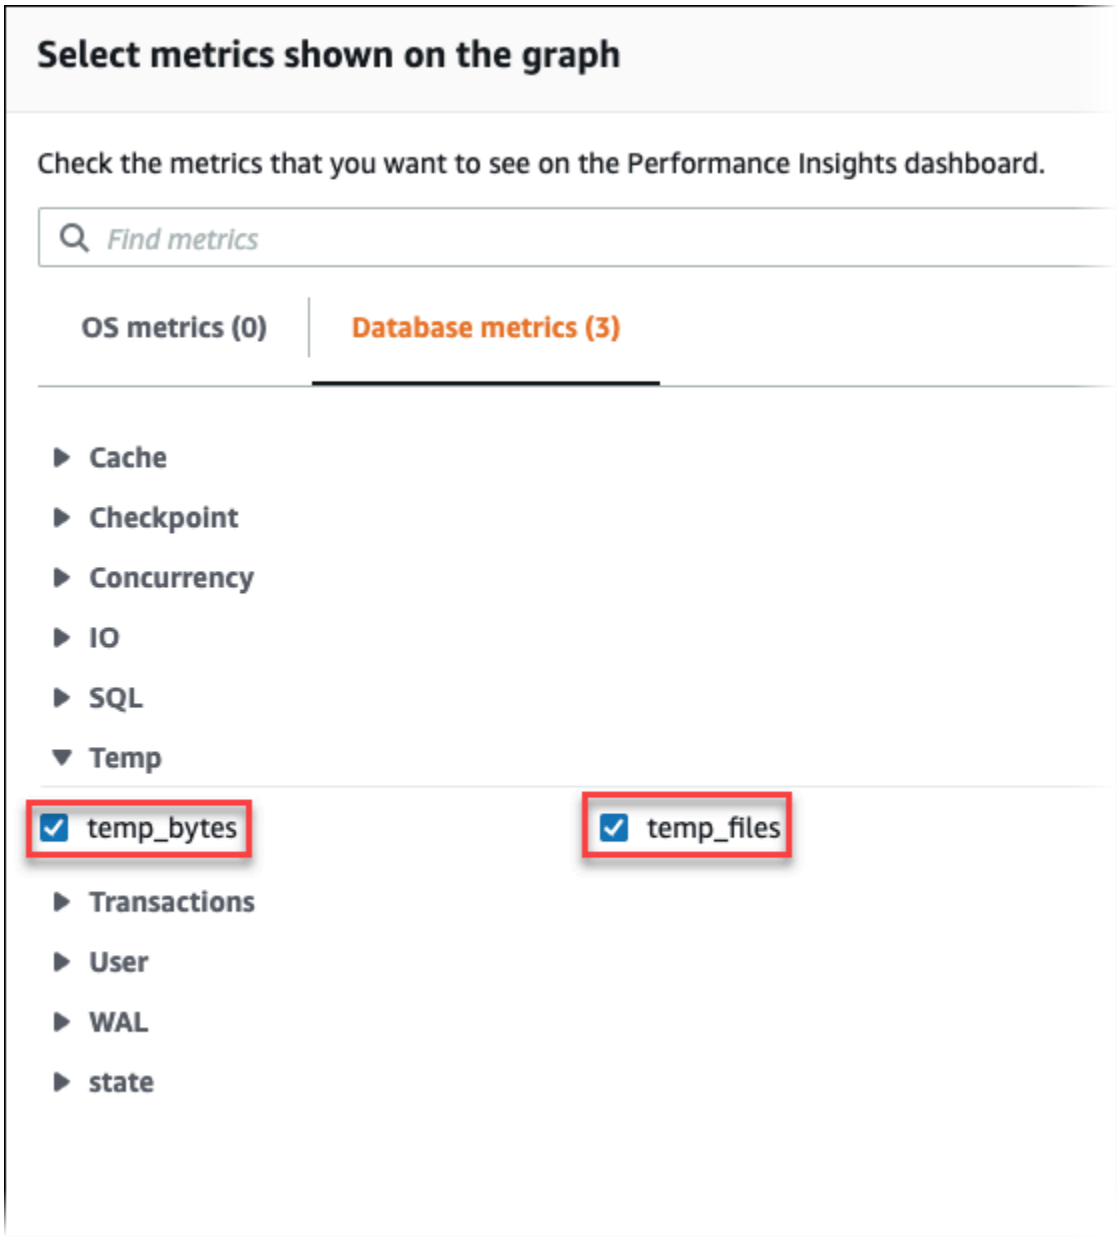


3. In the **Top SQL** tab, choose the **Preferences** icon.
4. In the **Preferences** window, turn on the following statistics to appear in the **Top SQL**tab and choose **Continue**.

   - Temp writes/sec
   - Temp reads/sec
   - Tmp blk write/call
   - Tmp blk read/call

5. The temporary file is broken out when combined with the query shown for `pg_ls_tmpdir`, as shown in the following example.

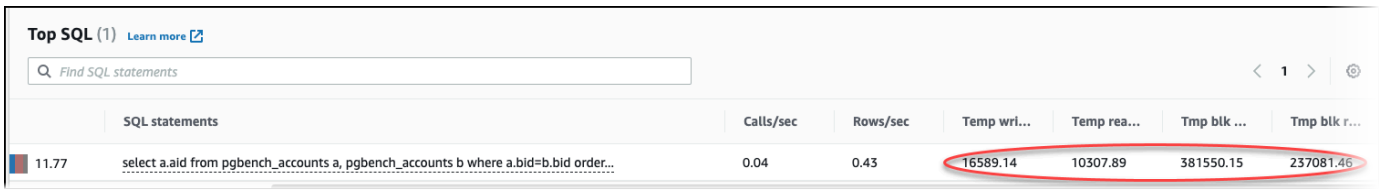

The `IO:BufFileRead` and `IO:BufFileWrite` events occur when the top queries in your workload often create temporary files. You can use Performance Insights to identify top queries waiting on `IO:BufFileRead` and `IO:BufFileWrite` by reviewing Average Active Session (AAS) in Database Load and Top SQL sections.

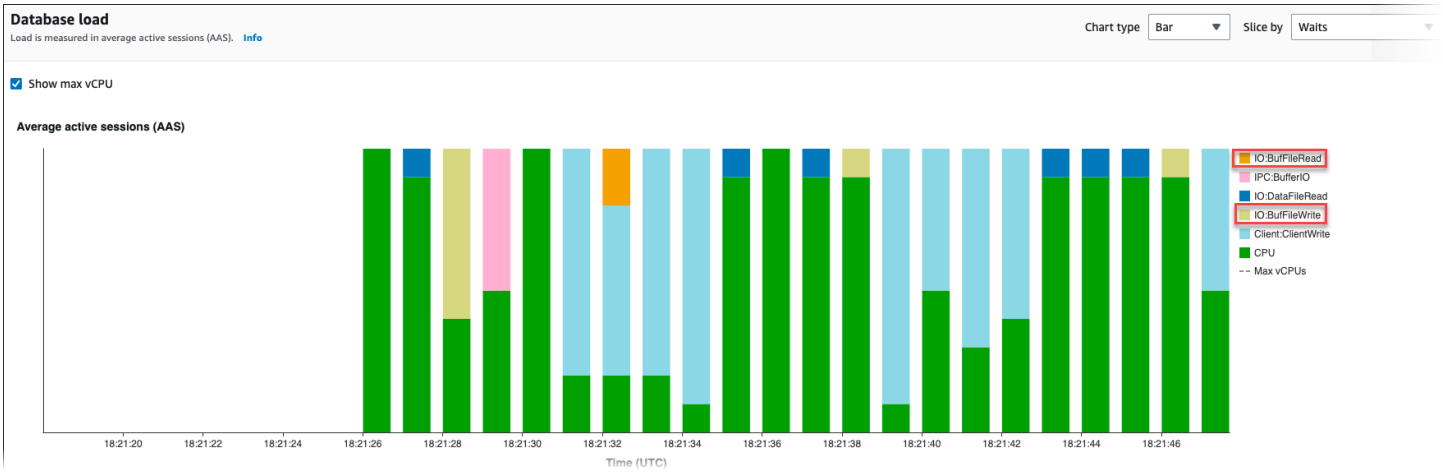

For more information on how to analyze top queries and load by wait event with Performance Insights, see Database Insights. You should identify and tune the queries that cause increase in temporary file usage and related wait events. For more information on these wait events and remediation, see IO:BufFileRead and IO:BufFileWrite.

> **Note**
>
> The `work_mem` parameter controls when the sort operation runs out of memory and results are written into temporary files. We recommend that you don't change the setting of this parameter higher than the default value because it would permit every database session to consume more memory. Also, a single session that performs complex joins and sorts can perform parallel operations in which each operation consumes memory.

As a best practice, when you have a large report with multiple joins and sorts, set this parameter at the session level by using the `SET work_mem` command. Then the change is only applied to the current session and doesn't change the value globally.

Tuning with wait events for Aurora PostgreSQL

Wait events are an important tuning tool for Aurora PostgreSQL. When you can find out why sessions are waiting for resources and what they are doing, you're better able to reduce bottlenecks. You can use the information in this section to find possible causes and corrective actions. Before delving into this section, we strongly recommend that you understand basic Aurora concepts, especially the following topics:

- Amazon Aurora storage
- Managing performance and scaling for Aurora DB clusters

Important

The wait events in this section are specific to Aurora PostgreSQL. Use the information in this section to tune Amazon Aurora only, not RDS for PostgreSQL.
Some wait events in this section have no analogs in the open source versions of these database engines. Other wait events have the same names as events in open source engines, but behave differently. For example, Amazon Aurora storage works differently from open source storage, so storage-related wait events indicate different resource conditions.

Topics

- Essential concepts for Aurora PostgreSQL tuning
- Aurora PostgreSQL wait events
- Client:ClientRead
- Client:ClientWrite
- CPU
- IO:BufFileRead and IO:BufFileWrite
- IO:DataFileRead

- IO:XactSync
- IPC:DamRecordTxAck
- IPC:parallel wait events
- IPC:ProcArrayGroupUpdate
- Lock:advisory
- Lock:extend
- Lock:Relation
- Lock:transactionid
- Lock:tuple
- LWLock:buffer_content (BufferContent)
- LWLock:buffer_mapping
- LWLock:BufferIO (IPC:BufferIO)
- LWLock:lock_manager
- LWLock:MultiXact
- LWLock:pg_stat_statements
- Timeout:PgSleep

Essential concepts for Aurora PostgreSQL tuning

Before you tune your Aurora PostgreSQL database, make sure to learn what wait events are and why they occur. Also review the basic memory and disk architecture of Aurora PostgreSQL. For a helpful architecture diagram, see the PostgreSQL wikibook.

Topics

- Aurora PostgreSQL wait events
- Aurora PostgreSQL memory
- Aurora PostgreSQL processes

Aurora PostgreSQL wait events

A *wait event* indicates a resource for which a session is waiting. For example, the wait event `Client:ClientRead` occurs when Aurora PostgreSQL is waiting to receive data from the client. Typical resources that a session waits for include the following:

- Single-threaded access to a buffer, for example, when a session is attempting to modify a buffer
- A row that is currently locked by another session
- A data file read
- A log file write

For example, to satisfy a query, the session might perform a full table scan. If the data isn't already in memory, the session waits for the disk I/O to complete. When the buffers are read into memory, the session might need to wait because other sessions are accessing the same buffers. The database records the waits by using a predefined wait event. These events are grouped into categories.

A wait event doesn't by itself show a performance problem. For example, if requested data isn't in memory, reading data from disk is necessary. If one session locks a row for an update, another session waits for the row to be unlocked so that it can update it. A commit requires waiting for the write to a log file to complete. Waits are integral to the normal functioning of a database.

Large numbers of wait events typically show a performance problem. In such cases, you can use wait event data to determine where sessions are spending time. For example, if a report that typically runs in minutes now runs for hours, you can identify the wait events that contribute the most to total wait time. If you can determine the causes of the top wait events, you can sometimes make changes that improve performance. For example, if your session is waiting on a row that has been locked by another session, you can end the locking session.

Aurora PostgreSQL memory

Aurora PostgreSQL memory is divided into shared and local.

Topics

- Shared memory in Aurora PostgreSQL
- Local memory in Aurora PostgreSQL

Shared memory in Aurora PostgreSQL

Aurora PostgreSQL allocates shared memory when the instance starts. Shared memory is divided into multiple subareas. Following, you can find a description of the most important ones.

Topics

- Shared buffers
- Write-ahead log (WAL)

Shared buffers

The *shared buffer pool* is an Aurora PostgreSQL memory area that holds all pages that are or were being used by application connections. A *page* is the memory version of a disk block. The shared buffer pool caches the data blocks read from disk. The pool reduces the need to reread data from disk, making the database operate more efficiently.

Every table and index is stored as an array of pages of a fixed size. Each block contains multiple tuples, which correspond to rows. A tuple can be stored in any page.

The shared buffer pool has finite memory. If a new request requires a page that isn't in memory, and no more memory exists, Aurora PostgreSQL evicts a less frequently used page to accommodate the request. The eviction policy is implemented by a clock sweep algorithm.

The `shared_buffers` parameter determines how much memory the server dedicates to caching data.

Write-ahead log (WAL)

Aurora PostgreSQL uses write-ahead logging (WAL). When a client changes data, Aurora PostgreSQL generates WAL records that describe the changes and saves the WAL records on Aurora storage. When the client issues a `COMMIT`, the session waits for the Aurora storage subsystem to acknowledge the commit. Aurora PostgreSQL reports this wait as the IO:XactSync wait event.

When you use logical replication, Aurora PostgreSQL caches the WAL stream in a buffer to reduce reads from Aurora storage during logical decoding. The `rds.logical_wal_cache` parameter sets the size of this buffer. When the `rds.logical_replication` parameter is turned off, Aurora PostgreSQL sets `rds.logical_wal_cache` to 0. For more information about the write-through cache, see Monitoring the Aurora PostgreSQL logical replication write-through cache.

The `wal_level` parameter determines how much information is written to the WAL.

Local memory in Aurora PostgreSQL

Every backend process allocates local memory for query processing.

Topics

- Work memory area

- Maintenance work memory area
- Temporary buffer area

Work memory area

The *work memory area* holds temporary data for queries that performs sorts and hashes. For example, a query with an `ORDER BY` clause performs a sort. Queries use hash tables in hash joins and aggregations.

The `work_mem` parameter specifies the amount of memory to be used by internal sort operations and hash tables before writing to temporary disk files. The default value is 4 MB. Multiple sessions can run simultaneously, and each session can run maintenance operations in parallel. For this reason, the total work memory used can be multiples of the `work_mem` setting.

Maintenance work memory area

The *maintenance work memory area* caches data for maintenance operations. These operations include vacuuming, creating an index, and adding foreign keys.

The `maintenance_work_mem` parameter specifies the maximum amount of memory to be used by maintenance operations. The default value is 64 MB. A database session can only run one maintenance operation at a time.

Temporary buffer area

The *temporary buffer area* caches temporary tables for each database session.

Each session allocates temporary buffers as needed up to the limit you specify. When the session ends, the server clears the buffers.

The `temp_buffers` parameter sets the maximum number of temporary buffers used by each session. Before the first use of temporary tables within a session, you can change the `temp_buffers` value.

Aurora PostgreSQL processes

Aurora PostgreSQL uses multiple processes.

Topics

- Postmaster process
- Backend processes

- Background processes

Postmaster process

The *postmaster process* is the first process started when you start Aurora PostgreSQL. The postmaster process has the following primary responsibilities:

- Fork and monitor background processes
- Receive authentication requests from client processes, and authenticate them before allowing the database to service requests

Backend processes

If the postmaster authenticates a client request, the postmaster forks a new backend process, also called a postgres process. One client process connects to exactly one backend process. The client process and the backend process communicate directly without intervention by the postmaster process.

Background processes

The postmaster process forks several processes that perform different backend tasks. Some of the more important include the following:

- Autovacuum daemon

  The daemon consists of the following:

  - The autovacuum launcher
  - The autovacuum worker processes

  When autovacuum is turned on, it checks for tables that have had a large number of inserted, updated, or deleted tuples. The daemon has the following responsibilities:

  - Recover or reuse disk space occupied by updated or deleted rows
  - Update statistics used by the planner
  - Protect against loss of old data because of transaction ID wraparound

  The autovacuum feature automates the execution of `VACUUM` and `ANALYZE` commands. `VACUUM` has the following variants: standard and full. Standard vacuum runs in parallel with other database operations. `VACUUM FULL` requires an exclusive lock on the table it is working on. Thus,

it can't run in parallel with operations that access the same table. `VACUUM` creates a substantial amount of I/O traffic, which can cause poor performance for other active sessions.

Aurora PostgreSQL wait events

The following table lists the wait events for Aurora PostgreSQL that most commonly indicate performance problems, and summarizes the most common causes and corrective actions. The following wait events are a subset of the list in Amazon Aurora PostgreSQL wait events.

Wait event	Definition
Client:ClientRead	This event occurs when Aurora PostgreSQL is waiting to receive data from the client.
Client:ClientWrite	This event occurs when Aurora PostgreSQL is waiting to write data to the client.
CPU	This event occurs when a thread is active in CPU or is waiting for CPU.
IO:BufFileRead and IO:BufFileWrite	These events occur when Aurora PostgreSQL creates temporary files.
IO:DataFileRead	This event occurs when a connection waits on a backend process to read a required page from storage because the page isn't available in shared memory.
IO:XactSync	This event occurs when the database is waiting for the Aurora storage subsystem to acknowledge the commit of a regular transaction, or the commit or rollback of a prepared transaction.
IPC:DamRecordTxAck	This event occurs when Aurora PostgreSQL in a session using database activity streams generates an activity stream event, then waits for that event to become durable.

Wait event	Definition
IPC:parallel wait events	These wait events indicate that a session is waiting for inter-process communication related to parallel query execution operations.
IPC:ProcArrayGroupUpdate	This event occurs when a session is waiting for the group leader to update the transaction status at the end of the transaction.
Lock:advisory	This event occurs when a PostgreSQL application uses a lock to coordinate activity across multiple sessions.
Lock:extend	This event occurs when a backend process is waiting to lock a relation to extend it while another process has a lock on that relation for the same purpose.
Lock:Relation	This event occurs when a query is waiting to acquire a lock on a table or view that's currently locked by another transaction.
Lock:transactionid	This event occurs when a transaction is waiting for a row-level lock.
Lock:tuple	This event occurs when a backend process is waiting to acquire a lock on a tuple.
LWLock:buffer_content (BufferContent)	This event occurs when a session is waiting to read or write a data page in memory while another session has that page locked for writing.
LWLock:buffer_mapping	This event occurs when a session is waiting to associate a data block with a buffer in the shared buffer pool.

Wait event	Definition
LWLock:BufferIO (IPC:BufferIO)	This event occurs when Aurora PostgreSQL or RDS for PostgreSQL is waiting for other processes to finish their input/output (I/O) operations when concurrently trying to access a page.
LWLock:lock_manager	This event occurs when the Aurora PostgreSQL engine maintains the shared lock's memory area to allocate, check, and deallocate a lock when a fast path lock isn't possible.
LWLock:MultiXact	This type of event occurs when Aurora PostgreSQL is keeping a session open to complete multiple transactions that involve the same row in a table. The wait event denotes which aspect of multiple transaction processing is generating the wait event, that is, LWLock:MultiXactOffsetSLRU, LWLock:MultiXactOffsetBuffer, LWLock:MultiXactMemberSLRU, or LWLock:MultiXactMemberBuffer.
LWLock:pg_stat_statements	This event occurs when the `pg_stat_statements` extension takes an exclusive lock on the hash table that tracks SQL statements.
Timeout:PgSleep	This event occurs when a server process has called the `pg_sleep` function and is waiting for the sleep timeout to expire.

Client:ClientRead

The `Client:ClientRead` event occurs when Aurora PostgreSQL is waiting to receive data from the client.

Topics

- Supported engine versions

- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for Aurora PostgreSQL version 10 and higher.

Context

An Aurora PostgreSQL DB cluster is waiting to receive data from the client. The Aurora PostgreSQL DB cluster must receive the data from the client before it can send more data to the client. The time that the cluster waits before receiving data from the client is a `Client:ClientRead` event.

Likely causes of increased waits

Common causes for the `Client:ClientRead` event to appear in top waits include the following:

Increased network latency

There might be increased network latency between the Aurora PostgreSQL DB cluster and client. Higher network latency increases the time required for DB cluster to receive data from the client.

Increased load on the client

There might be CPU pressure or network saturation on the client. An increase in load on the client can delay transmission of data from the client to the Aurora PostgreSQL DB cluster.

Excessive network round trips

A large number of network round trips between the Aurora PostgreSQL DB cluster and the client can delay transmission of data from the client to the Aurora PostgreSQL DB cluster.

Large copy operation

During a copy operation, the data is transferred from the client's file system to the Aurora PostgreSQL DB cluster. Sending a large amount of data to the DB cluster can delay transmission of data from the client to the DB cluster.

Idle client connection

A connection to an Aurora PostgreSQL DB instance is in idle in transaction state and is waiting for a client to send more data or issue a command. This state can lead to an increase in `Client:ClientRead` events.

PgBouncer used for connection pooling

PgBouncer has a low-level network configuration setting called `pkt_buf`, which is set to 4,096 by default. If the workload is sending query packets larger than 4,096 bytes through PgBouncer, we recommend increasing the `pkt_buf` setting to 8,192. If the new setting doesn't decrease the number of `Client:ClientRead` events, we recommend increasing the `pkt_buf` setting to larger values, such as 16,384 or 32,768. If the query text is large, the larger setting can be particularly helpful.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Place the clients in the same Availability Zone and VPC subnet as the cluster
- Scale your client
- Use current generation instances
- Increase network bandwidth
- Monitor maximums for network performance
- Monitor for transactions in the "idle in transaction" state

Place the clients in the same Availability Zone and VPC subnet as the cluster

To reduce network latency and increase network throughput, place clients in the same Availability Zone and virtual private cloud (VPC) subnet as the Aurora PostgreSQL DB cluster. Make sure that the clients are as geographically close to the DB cluster as possible.

Scale your client

Using Amazon CloudWatch or other host metrics, determine if your client is currently constrained by CPU or network bandwidth, or both. If the client is constrained, scale your client accordingly.

Use current generation instances

In some cases, you might not be using a DB instance class that supports jumbo frames. If you're running your application on Amazon EC2, consider using a current generation instance for the client. Also, configure the maximum transmission unit (MTU) on the client operating system. This technique might reduce the number of network round trips and increase network throughput. For more information, see Jumbo frames (9001 MTU) in the *Amazon EC2 User Guide*.

For information about DB instance classes, see Amazon AuroraDB instance classes. To determine the DB instance class that is equivalent to an Amazon EC2 instance type, place `db.` before the Amazon EC2 instance type name. For example, the `r5.8xlarge` Amazon EC2 instance is equivalent to the `db.r5.8xlarge` DB instance class.

Increase network bandwidth

Use `NetworkReceiveThroughput` and `NetworkTransmitThroughput` Amazon CloudWatch metrics to monitor incoming and outgoing network traffic on the DB cluster. These metrics can help you to determine if network bandwidth is sufficient for your workload.

If your network bandwidth isn't enough, increase it. If the Amazon client or your DB instance is reaching the network bandwidth limits, the only way to increase the bandwidth is to increase your DB instance size.

For more information about CloudWatch metrics, see Amazon CloudWatch metrics for Amazon Aurora.

Monitor maximums for network performance

If you are using Amazon EC2 clients, Amazon EC2 provides maximums for network performance metrics, including aggregate inbound and outbound network bandwidth. It also provides connection tracking to ensure that packets are returned as expected and link-local services access for services such as the Domain Name System (DNS). To monitor these maximums, use a current enhanced networking driver and monitor network performance for your client.

For more information, see Monitor network performance for your Amazon EC2 instance in the *Amazon EC2 User Guide* and Monitor network performance for your Amazon EC2 instance in the *Amazon EC2 User Guide*.

Monitor for transactions in the "idle in transaction" state

Check whether you have an increasing number of `idle in transaction` connections. To do this, monitor the `state` column in the `pg_stat_activity` table. You might be able to identify the connection source by running a query similar to the following.

```
select client_addr, state, count(1) from pg_stat_activity
where state like 'idle in transaction%'
group by 1,2
order by 3 desc
```

Client:ClientWrite

The `Client:ClientWrite` event occurs when Aurora PostgreSQL is waiting to write data to the client.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for Aurora PostgreSQL version 10 and higher.

Context

A client process must read all of the data received from an Aurora PostgreSQL DB cluster before the cluster can send more data. The time that the cluster waits before sending more data to the client is a `Client:ClientWrite` event.

Reduced network throughput between the Aurora PostgreSQL DB cluster and the client can cause this event. CPU pressure and network saturation on the client can also cause this event. *CPU pressure* is when the CPU is fully utilized and there are tasks waiting for CPU time. *Network saturation* is when the network between the database and client is carrying more data than it can handle.

Likely causes of increased waits

Common causes for the `Client:ClientWrite` event to appear in top waits include the following:

Increased network latency

There might be increased network latency between the Aurora PostgreSQL DB cluster and client. Higher network latency increases the time required for the client to receive the data.

Increased load on the client

There might be CPU pressure or network saturation on the client. An increase in load on the client delays the reception of data from the Aurora PostgreSQL DB cluster.

Large volume of data sent to the client

The Aurora PostgreSQL DB cluster might be sending a large amount of data to the client. A client might not be able to receive the data as fast as the cluster is sending it. Activities such as a copy of a large table can result in an increase in `Client:ClientWrite` events.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Place the clients in the same Availability Zone and VPC subnet as the cluster
- Use current generation instances
- Reduce the amount of data sent to the client
- Scale your client

Place the clients in the same Availability Zone and VPC subnet as the cluster

To reduce network latency and increase network throughput, place clients in the same Availability Zone and virtual private cloud (VPC) subnet as the Aurora PostgreSQL DB cluster.

Use current generation instances

In some cases, you might not be using a DB instance class that supports jumbo frames. If you're running your application on Amazon EC2, consider using a current generation instance for the client. Also, configure the maximum transmission unit (MTU) on the client operating system. This

technique might reduce the number of network round trips and increase network throughput. For more information, see Jumbo frames (9001 MTU) in the *Amazon EC2 User Guide*.

For information about DB instance classes, see Amazon AuroraDB instance classes. To determine the DB instance class that is equivalent to an Amazon EC2 instance type, place `db.` before the Amazon EC2 instance type name. For example, the `r5.8xlarge` Amazon EC2 instance is equivalent to the `db.r5.8xlarge` DB instance class.

Reduce the amount of data sent to the client

When possible, adjust your application to reduce the amount of data that the Aurora PostgreSQL DB cluster sends to the client. Making such adjustments relieves CPU and network contention on the client.

Scale your client

Using Amazon CloudWatch or other host metrics, determine if your client is currently constrained by CPU or network bandwidth, or both. If the client is constrained, scale your client accordingly.

CPU

This event occurs when a thread is active in CPU or is waiting for CPU.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is relevant for Aurora PostgreSQL version 9.6 and higher.

Context

The *central processing unit (CPU)* is the component of a computer that runs instructions. For example, CPU instructions perform arithmetic operations and exchange data in memory. If a query increases the number of instructions that it performs through the database engine, the time spent running the query increases. *CPU scheduling* is giving CPU time to a process. Scheduling is orchestrated by the kernel of the operating system.

Topics

- How to tell when this wait occurs
- DBLoadCPU metric
- os.cpuUtilization metrics
- Likely cause of CPU scheduling

How to tell when this wait occurs

This CPU wait event indicates that a backend process is active in CPU or is waiting for CPU. You know that it's occurring when a query shows the following information:

- The `pg_stat_activity.state` column has the value `active`.
- The `wait_event_type` and `wait_event` columns in `pg_stat_activity` are both `null`.

To see the backend processes that are using or waiting on CPU, run the following query.

```
SELECT *
FROM   pg_stat_activity
WHERE  state = 'active'
AND    wait_event_type IS NULL
AND    wait_event IS NULL;
```

DBLoadCPU metric

The database metric for CPU is `DBLoadCPU`, which is exposed through the Performance Insights API. The value for `DBLoadCPU` can differ from the value for the Amazon CloudWatch metric `CPUUtilization`. The latter metric is collected from the HyperVisor for a database instance.

os.cpuUtilization metrics

The database counter metrics include operating-system metrics that provide information about CPU utilization. For example, you can display the following metrics:

- `os.cpuUtilization.nice.avg`
- `os.cpuUtilization.total.avg`
- `os.cpuUtilization.wait.avg`
- `os.cpuUtilization.idle.avg`

Performance Insights reports the CPU usage by the database engine as `os.cpuUtilization.nice.avg`.

Likely cause of CPU scheduling

From an operating system perspective, the CPU is active when it isn't running the idle thread. The CPU is active while it performs a computation, but it's also active when it waits on memory I/O. This type of I/O dominates a typical database workload.

Processes are likely to wait to get scheduled on a CPU when the following conditions are met:

- The CloudWatch `CPUUtilization` metric is near 100 percent.
- The average load is greater than the number of vCPUs, indicating a heavy load. You can find the `loadAverageMinute` metric in the OS metrics section in Performance Insights.

Likely causes of increased waits

When the CPU wait event occurs more than normal, possibly indicating a performance problem, typical causes include the following.

Topics

- Likely causes of sudden spikes
- Likely causes of long-term high frequency
- Corner cases

Likely causes of sudden spikes

The most likely causes of sudden spikes are as follows:

- Your application has opened too many simultaneous connections to the database. This scenario is known as a "connection storm."
- Your application workload changed in any of the following ways:
  - New queries
  - An increase in the size of your dataset
  - Index maintenance or creation
  - New functions
  - New operators

  - An increase in parallel query execution
- Your query execution plans have changed. In some cases, a change can cause an increase in buffers. For example, the query is now using a sequential scan when it previously used an index. In this case, the queries need more CPU to accomplish the same goal.

Likely causes of long-term high frequency

The most likely causes of events that recur over a long period:

- Too many backend processes are running concurrently on CPU. These processes can be parallel workers.
- Queries are performing suboptimally because they need a large number of buffers.

Corner cases

If none of the likely causes turn out to be actual causes, the following situations might be occurring:

- The CPU is swapping processes in and out.
- CPU context switching has increased.
- Aurora PostgreSQL code is missing wait events.

Actions

If the CPU wait event dominates database activity, it doesn't necessarily indicate a performance problem. Respond to this event only when performance degrades.

Topics

- Investigate whether the database is causing the CPU increase
- Determine whether the number of connections increased
- Respond to workload changes

Investigate whether the database is causing the CPU increase

Examine the `os.cpuUtilization.nice.avg` metric in Performance Insights. If this value is far less than the CPU usage, nondatabase processes are the main contributor to CPU.

Determine whether the number of connections increased

Examine the `DatabaseConnections` metric in Amazon CloudWatch. Your action depends on whether the number increased or decreased during the period of increased CPU wait events.

The connections increased

If the number of connections went up, compare the number of backend processes consuming CPU to the number of vCPUs. The following scenarios are possible:

- The number of backend processes consuming CPU is less than the number of vCPUs.

  In this case, the number of connections isn't an issue. However, you might still try to reduce CPU utilization.
- The number of backend processes consuming CPU is greater than the number of vCPUs.

  In this case, consider the following options:

  - Decrease the number of backend processes connected to your database. For example, implement a connection pooling solution such as RDS Proxy. To learn more, see Amazon RDS Proxy for Aurora.
  - Upgrade your instance size to get a higher number of vCPUs.
  - Redirect some read-only workloads to reader nodes, if applicable.

The connections didn't increase

Examine the `blks_hit` metrics in Performance Insights. Look for a correlation between an increase in `blks_hit` and CPU usage. The following scenarios are possible:

- CPU usage and `blks_hit` are correlated.

  In this case, find the top SQL statements that are linked to the CPU usage, and look for plan changes. You can use either of the following techniques:

  - Explain the plans manually and compare them to the expected execution plan.
  - Look for an increase in block hits per second and local block hits per second. In the **Top SQL** section of Performance Insights dashboard, choose **Preferences**.
- CPU usage and `blks_hit` aren't correlated.

  In this case, determine whether any of the following occurs:

- The application is rapidly connecting to and disconnecting from the database.

  Diagnose this behavior by turning on `log_connections` and `log_disconnections`, then analyzing the PostgreSQL logs. Consider using the `pgbadger` log analyzer. For more information, see https://github.com/darold/pgbadger.

- The OS is overloaded.

  In this case, Performance Insights shows that backend processes are consuming CPU for a longer time than usual. Look for evidence in the Performance Insights `os.cpuUtilization` metrics or the CloudWatch `CPUUtilization` metric. If the operating system is overloaded, look at Enhanced Monitoring metrics to diagnose further. Specifically, look at the process list and the percentage of CPU consumed by each process.

- Top SQL statements are consuming too much CPU.

  Examine statements that are linked to the CPU usage to see whether they can use less CPU. Run an `EXPLAIN` command, and focus on the plan nodes that have the most impact. Consider using a PostgreSQL execution plan visualizer. To try out this tool, see http://explain.dalibo.com/.

Respond to workload changes

If your workload has changed, look for the following types of changes:

New queries

Check whether the new queries are expected. If so, ensure that their execution plans and the number of executions per second are expected.

An increase in the size of the data set

Determine whether partitioning, if it's not already implemented, might help. This strategy might reduce the number of pages that a query needs to retrieve.

Index maintenance or creation

Check whether the schedule for the maintenance is expected. A best practice is to schedule maintenance activities outside of peak activities.

New functions

Check whether these functions perform as expected during testing. Specifically, check whether the number of executions per second is expected.

New operators

Check whether they perform as expected during the testing.

An increase in running parallel queries

Determine whether any of the following situations has occurred:

- The relations or indexes involved have suddenly grown in size so that they differ significantly from `min_parallel_table_scan_size` or `min_parallel_index_scan_size`.
- Recent changes have been made to `parallel_setup_cost` or `parallel_tuple_cost`.
- Recent changes have been made to `max_parallel_workers` or `max_parallel_workers_per_gather`.

IO:BufFileRead and IO:BufFileWrite

The `IO:BufFileRead` and `IO:BufFileWrite` events occur when Aurora PostgreSQL creates temporary files. When operations require more memory than the working memory parameters currently define, they write temporary data to persistent storage. This operation is sometimes called *spilling to disk*. For more information about the temporary files and their usage, see Managing temporary files with PostgreSQL.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

`IO:BufFileRead` and `IO:BufFileWrite` relate to the work memory area and maintenance work memory area. For more information about these local memory areas, see Work memory area and Maintenance work memory area.

The default value for `work_mem` is 4 MB. If one session performs operations in parallel, each worker handling the parallelism uses 4 MB of memory. For this reason, set `work_mem` carefully. If you increase the value too much, a database running many sessions might consume too much memory. If you set the value too low, Aurora PostgreSQL creates temporary files in local storage. The disk I/O for these temporary files can reduce performance.

If you observe the following sequence of events, your database might be generating temporary files:

1. Sudden and sharp decreases in availability
2. Fast recovery for the free space

You might also see a "chainsaw" pattern. This pattern can indicate that your database is creating small files constantly.

Likely causes of increased waits

In general, these wait events are caused by operations that consume more memory than the `work_mem` or `maintenance_work_mem` parameters allocate. To compensate, the operations write to temporary files. Common causes for the `IO:BufFileRead` and `IO:BufFileWrite` events include the following:

Queries that need more memory than exists in the work memory area

Queries with the following characteristics use the work memory area:

- Hash joins
- `ORDER BY` clause
- `GROUP BY` clause
- `DISTINCT`
- Window functions
- `CREATE TABLE AS SELECT`
- Materialized view refresh

Statements that need more memory than exists in the maintenance work memory area

The following statements use the maintenance work memory area:

- `CREATE INDEX`
- `CLUSTER`

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Identify the problem
- Examine your join queries
- Examine your ORDER BY and GROUP BY queries
- Avoid using the DISTINCT operation
- Consider using window functions instead of GROUP BY functions
- Investigate materialized views and CTAS statements
- Use pg_repack when you create indexes
- Increase maintenance_work_mem when you cluster tables
- Tune memory to prevent IO:BufFileRead and IO:BufFileWrite

Identify the problem

You can view temporary file usage directly in Performance Insights. For more information, see Viewing temporary file usage with Performance Insights. When Performance Insights is disabled, you might notice increased `IO:BufFileRead` and `IO:BufFileWrite` operations. To troubleshoot, do the following:

1. Examine the `FreeLocalStorage` metric in Amazon CloudWatch.
2. Look for a chainsaw pattern, which is a series of jagged spikes.

A chainsaw pattern indicates a quick consumption and release of storage, often associated with temporary files. If you notice this pattern, turn on Performance Insights. When using Performance Insights, you can identify when the wait events occur and which queries are associated with them. Your solution depends on the specific query causing the events.

Or set the parameter `log_temp_files`. This parameter logs all queries generating more than threshold KB of temporary files. If the value is `0`, Aurora PostgreSQL logs all temporary files. If the

value is 1024, Aurora PostgreSQL logs all queries that produces temporary files larger than 1 MB. For more information about log_temp_files, see Error Reporting and Logging in the PostgreSQL documentation.

Examine your join queries

Your application probably use joins. For example, the following query joins four tables.

```
SELECT *
       FROM order
 INNER JOIN order_item
       ON (order.id = order_item.order_id)
 INNER JOIN customer
       ON (customer.id = order.customer_id)
 INNER JOIN customer_address
       ON (customer_address.customer_id = customer.id AND
           order.customer_address_id = customer_address.id)
 WHERE customer.id = 1234567890;
```

A possible cause of spikes in temporary file usage is a problem in the query itself. For example, a broken clause might not filter the joins properly. Consider the second inner join in the following example.

```
SELECT *
       FROM order
 INNER JOIN order_item
       ON (order.id = order_item.order_id)
 INNER JOIN customer
       ON (customer.id = customer.id)
 INNER JOIN customer_address
       ON (customer_address.customer_id = customer.id AND
           order.customer_address_id = customer_address.id)
 WHERE customer.id = 1234567890;
```

The preceding query mistakenly joins customer.id to customer.id, generating a Cartesian product between every customer and every order. This type of accidental join generates large temporary files. Depending on the size of the tables, a Cartesian query can even fill up storage. Your application might have Cartesian joins when the following conditions are met:

- You see large, sharp decreases in storage availability, followed by fast recovery.
- No indexes are being created.

- No CREATE TABLE FROM SELECT statements are being issued.
- No materialized views are being refreshed.

To see whether the tables are being joined using the proper keys, inspect your query and object-relational mapping directives. Bear in mind that certain queries of your application are not called all the time, and some queries are dynamically generated.

Examine your ORDER BY and GROUP BY queries

In some cases, an ORDER BY clause can result in excessive temporary files. Consider the following guidelines:

- Only include columns in an ORDER BY clause when they need to be ordered. This guideline is especially important for queries that return thousands of rows and specify many columns in the ORDER BY clause.
- Considering creating indexes to accelerate ORDER BY clauses when they match columns that have the same ascending or descending order. Partial indexes are preferable because they are smaller. Smaller indexes are read and traversed more quickly.
- If you create indexes for columns that can accept null values, consider whether you want the null values stored at the end or at the beginning of the indexes.

  If possible, reduce the number of rows that need to be ordered by filtering the result set. If you use WITH clause statements or subqueries, remember that an inner query generates a result set and passes it to the outside query. The more rows that a query can filter out, the less ordering the query needs to do.
- If you don't need to obtain the full result set, use the LIMIT clause. For example, if you only want the top five rows, a query using the LIMIT clause doesn't keep generating results. In this way, the query requires less memory and temporary files.

A query that uses a GROUP BY clause can also require temporary files. GROUP BY queries summarize values by using functions such as the following:

- COUNT
- AVG
- MIN
- MAX

- SUM
- STDDEV

To tune GROUP BY queries, follow the recommendations for ORDER BY queries.

Avoid using the DISTINCT operation

If possible, avoid using the DISTINCT operation to remove duplicated rows. The more unnecessary and duplicated rows that your query returns, the more expensive the DISTINCT operation becomes. If possible, add filters in the WHERE clause even if you use the same filters for different tables. Filtering the query and joining correctly improves your performance and reduces resource use. It also prevents incorrect reports and results.

If you need to use DISTINCT for multiple rows of a same table, consider creating a composite index. Grouping multiple columns in an index can improve the time to evaluate distinct rows. Also, if you use Amazon Aurora PostgreSQL version 10 or higher, you can correlate statistics among multiple columns by using the CREATE STATISTICS command.

Consider using window functions instead of GROUP BY functions

Using GROUP BY, you change the result set, and then retrieve the aggregated result. Using window functions, you aggregate data without changing the result set. A window function uses the OVER clause to perform calculations across the sets defined by the query, correlating one row with another. You can use all the GROUP BY functions in window functions, but also use functions such as the following:

- RANK
- ARRAY_AGG
- ROW_NUMBER
- LAG
- LEAD

To minimize the number of temporary files generated by a window function, remove duplications for the same result set when you need two distinct aggregations. Consider the following query.

```
SELECT sum(salary) OVER (PARTITION BY dept ORDER BY salary DESC) as sum_salary
     , avg(salary) OVER (PARTITION BY dept ORDER BY salary ASC) as avg_salary
```

```
  FROM empsalary;
```

You can rewrite the query with the `WINDOW` clause as follows.

```
SELECT sum(salary) OVER w as sum_salary
         , avg(salary) OVER w as_avg_salary
    FROM empsalary
  WINDOW w AS (PARTITION BY dept ORDER BY salary DESC);
```

By default, the Aurora PostgreSQL execution planner consolidates similar nodes so that it doesn't duplicate operations. However, by using an explicit declaration for the window block, you can maintain the query more easily. You might also improve performance by preventing duplication.

Investigate materialized views and CTAS statements

When a materialized view refreshes, it runs a query. This query can contain an operation such as `GROUP BY`, `ORDER BY`, or `DISTINCT`. During a refresh, you might observe large numbers of temporary files and the wait events `IO:BufFileWrite` and `IO:BufFileRead`. Similarly, when you create a table based on a `SELECT` statement, the `CREATE TABLE` statement runs a query. To reduce the temporary files needed, optimize the query.

Use pg_repack when you create indexes

When you create an index, the engine orders the result set. As tables grow in size, and as values in the indexed column become more diverse, the temporary files require more space. In most cases, you can't prevent the creation of temporary files for large tables without modifying the maintenance work memory area. For more information, see Maintenance work memory area.

A possible workaround when recreating a large index is to use the pg_repack tool. For more information, see Reorganize tables in PostgreSQL databases with minimal locks in the pg_repack documentation.

Increase maintenance_work_mem when you cluster tables

The `CLUSTER` command clusters the table specified by *table_name* based on an existing index specified by *index_name*. Aurora PostgreSQL physically recreates the table to match the order of a given index.

When magnetic storage was prevalent, clustering was common because storage throughput was limited. Now that SSD-based storage is common, clustering is less popular. However, if you cluster

tables, you can still increase performance slightly depending on the table size, index, query, and so on.

If you run the CLUSTER command and observe the wait events `IO:BufFileWrite` and `IO:BufFileRead`, tune `maintenance_work_mem`. Increase the memory size to a fairly large amount. A high value means that the engine can use more memory for the clustering operation.

Tune memory to prevent IO:BufFileRead and IO:BufFileWrite

In some situation, you need to tune memory. Your goal is to balance the following requirements:

- The `work_mem` value (see Work memory area)
- The memory remaining after discounting the `shared_buffers` value (see Buffer pool)
- The maximum connections opened and in use, which is limited by `max_connections`

Increase the size of the work memory area

In some situations, your only option is to increase the memory used by your session. If your queries are correctly written and are using the correct keys for joins, consider increasing the `work_mem` value. For more information, see Work memory area.

To find out how many temporary files a query generates, set `log_temp_files` to `0`. If you increase the `work_mem` value to the maximum value identified in the logs, you prevent the query from generating temporary files. However, `work_mem` sets the maximum per plan node for each connection or parallel worker. If the database has 5,000 connections, and if each one uses 256 MiB memory, the engine needs 1.2 TiB of RAM. Thus, your instance might run out of memory.

Reserve sufficient memory for the shared buffer pool

Your database uses memory areas such as the shared buffer pool, not just the work memory area. Consider the requirements of these additional memory areas before you increase `work_mem`. For more information about the buffer pool, see Buffer pool.

For example, assume that your Aurora PostgreSQL instance class is db.r5.2xlarge. This class has 64 GiB of memory. By default, 75 percent of the memory is reserved for the shared buffer pool. After you subtract the amount allocated to the shared memory area, 16,384 MB remains. Don't allocate the remaining memory exclusively to the work memory area because the operating system and the engine also require memory.

The memory that you can allocate to `work_mem` depends on the instance class. If you use a larger instance class, more memory is available. However, in the preceding example, you can't use more than 16 GiB. Otherwise, your instance becomes unavailable when it runs out of memory. To recover the instance from the unavailable state, the Aurora PostgreSQL automation services automatically restart.

Manage the number of connections

Suppose that your database instance has 5,000 simultaneous connections. Each connection uses at least 4 MiB of `work_mem`. The high memory consumption of the connections is likely to degrade performance. In response, you have the following options:

- Upgrade to a larger instance class.
- Decrease the number of simultaneous database connections by using a connection proxy or pooler.

For proxies, consider Amazon RDS Proxy, pgBouncer, or a connection pooler based on your application. This solution alleviates the CPU load. It also reduces the risk when all connections require the work memory area. When fewer database connections exist, you can increase the value of `work_mem`. In this way, you reduce the occurrence of the `IO:BufFileRead` and `IO:BufFileWrite` wait events. Also, the queries waiting for the work memory area speed up significantly.

IO:DataFileRead

The `IO:DataFileRead` event occurs when a connection waits on a backend process to read a required page from storage because the page isn't available in shared memory.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

All queries and data manipulation (DML) operations access pages in the buffer pool. Statements that can induce reads include SELECT, UPDATE, and DELETE. For example, an UPDATE can read pages from tables or indexes. If the page being requested or updated isn't in the shared buffer pool, this read can lead to the `IO:DataFileRead` event.

Because the shared buffer pool is finite, it can fill up. In this case, requests for pages that aren't in memory force the database to read blocks from disk. If the `IO:DataFileRead` event occurs frequently, your shared buffer pool might be too small to accommodate your workload. This problem is acute for SELECT queries that read a large number of rows that don't fit in the buffer pool. For more information about the buffer pool, see Shared memory in Aurora PostgreSQL.

Likely causes of increased waits

Common causes for the `IO:DataFileRead` event include the following:

Connection spikes

You might find multiple connections generating the same number of IO:DataFileRead wait events. In this case, a spike (sudden and large increase) in `IO:DataFileRead` events can occur.

SELECT and DML statements performing sequential scans

Your application might be performing a new operation. Or an existing operation might change because of a new execution plan. In such cases, look for tables (particularly large tables) that have a greater `seq_scan` value. Find them by querying `pg_stat_user_tables`. To track queries that are generating more read operations, use the extension `pg_stat_statements`.

CTAS and CREATE INDEX for large data sets

A *CTAS* is a `CREATE TABLE AS SELECT` statement. If you run a CTAS using a large data set as a source, or create an index on a large table, the `IO:DataFileRead` event can occur. When you create an index, the database might need to read the entire object using a sequential scan. A CTAS generates `IO:DataFile` reads when pages aren't in memory.

Multiple vacuum workers running at the same time

Vacuum workers can be triggered manually or automatically. We recommend adopting an aggressive vacuum strategy. However, when a table has many updated or deleted rows, the `IO:DataFileRead` waits increase. After space is reclaimed, the vacuum time spent on `IO:DataFileRead` decreases.

Ingesting large amounts of data

When your application ingests large amounts of data, ANALYZE operations might occur more often. The ANALYZE process can be triggered by an autovacuum launcher or invoked manually.

The ANALYZE operation reads a subset of the table. The number of pages that must be scanned is calculated by multiplying 30 by the `default_statistics_target` value. For more information, see the PostgreSQL documentation. The `default_statistics_target` parameter accepts values between 1 and 10,000, where the default is 100.

Resource starvation

If instance network bandwidth or CPU are consumed, the `IO:DataFileRead` event might occur more frequently.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Check predicate filters for queries that generate waits
- Minimize the effect of maintenance operations
- Respond to high numbers of connections

Check predicate filters for queries that generate waits

Assume that you identify specific queries that are generating `IO:DataFileRead` wait events. You might identify them using the following techniques:

- Performance Insights
- Catalog views such as the one provided by the extension `pg_stat_statements`
- The catalog view `pg_stat_all_tables`, if it periodically shows an increased number of physical reads
- The `pg_statio_all_tables` view, if it shows that `_read` counters are increasing

We recommend that you determine which filters are used in the predicate (WHERE clause) of these queries. Follow these guidelines:

- Run the EXPLAIN command. In the output, identify which types of scans are used. A sequential scan doesn't necessarily indicate a problem. Queries that use sequential scans naturally produce more IO:DataFileRead events when compared to queries that use filters.

  Find out whether the column listed in the WHERE clause is indexed. If not, consider creating an index for this column. This approach avoids the sequential scans and reduces the IO:DataFileRead events. If a query has restrictive filters and still produces sequential scans, evaluate whether the proper indexes are being used.
- Find out whether the query is accessing a very large table. In some cases, partitioning a table can improve performance, allowing the query to only read necessary partitions.
- Examine the cardinality (total number of rows) from your join operations. Note how restrictive the values are that you're passing in the filters for your WHERE clause. If possible, tune your query to reduce the number of rows that are passed in each step of the plan.

Minimize the effect of maintenance operations

Maintenance operations such as VACUUM and ANALYZE are important. We recommend that you don't turn them off because you find IO:DataFileRead wait events related to these maintenance operations. The following approaches can minimize the effect of these operations:

- Run maintenance operations manually during off-peak hours. This technique prevents the database from reaching the threshold for automatic operations.
- For very large tables, consider partitioning the table. This technique reduces the overhead of maintenance operations. The database only accesses the partitions that require maintenance.
- When you ingest large amounts of data, consider disabling the autoanalyze feature.

The autovacuum feature is automatically triggered for a table when the following formula is true.

```
pg_stat_user_tables.n_dead_tup > (pg_class.reltuples x autovacuum_vacuum_scale_factor)
 + autovacuum_vacuum_threshold
```

The view pg_stat_user_tables and catalog pg_class have multiple rows. One row can correspond to one row in your table. This formula assumes that the reltuples are for a specific table. The parameters autovacuum_vacuum_scale_factor (0.20 by default) and autovacuum_vacuum_threshold (50 tuples by default) are usually set globally for the whole instance. However, you can set different values for a specific table.

Topics

- Find tables consuming space unnecessarily
- Find indexes consuming unnecessary space
- Find tables that are eligible to be autovacuumed

Find tables consuming space unnecessarily

To find tables consuming more space than necessary, run the following query. When this query is run by a database user role that doesn't have the `rds_superuser` role, it returns information about only those tables that the user role has permissions to read. This query is supported by PostgreSQL version 12 and later versions.

```
WITH report AS (
   SELECT   schemaname
           ,tblname
           ,n_dead_tup
           ,n_live_tup
           ,block_size*tblpages AS real_size
           ,(tblpages-est_tblpages)*block_size AS extra_size
           ,CASE WHEN tblpages - est_tblpages > 0
              THEN 100 * (tblpages - est_tblpages)/tblpages::float
              ELSE 0
            END AS extra_ratio, fillfactor, (tblpages-est_tblpages_ff)*block_size AS
 bloat_size
           ,CASE WHEN tblpages - est_tblpages_ff > 0
              THEN 100 * (tblpages - est_tblpages_ff)/tblpages::float
              ELSE 0
            END AS bloat_ratio
           ,is_na
    FROM (
          SELECT  ceil( reltuples / ( (block_size-page_hdr)/tpl_size ) ) +
 ceil( toasttuples / 4 ) AS est_tblpages
                 ,ceil( reltuples / ( (block_size-page_hdr)*fillfactor/
(tpl_size*100) ) ) + ceil( toasttuples / 4 ) AS est_tblpages_ff
                 ,tblpages
                 ,fillfactor
                 ,block_size
                 ,tblid
                 ,schemaname
                 ,tblname
                 ,n_dead_tup
```

```
                  ,n_live_tup
                  ,heappages
                  ,toastpages
                  ,is_na
              FROM (
                    SELECT ( 4 + tpl_hdr_size + tpl_data_size + (2*ma)
                                - CASE WHEN tpl_hdr_size%ma = 0 THEN ma ELSE
 tpl_hdr_size%ma END
                                - CASE WHEN ceil(tpl_data_size)::int%ma = 0 THEN ma ELSE
 ceil(tpl_data_size)::int%ma END
                           ) AS tpl_size
                           ,block_size - page_hdr AS size_per_block
                           ,(heappages + toastpages) AS tblpages
                           ,heappages
                           ,toastpages
                           ,reltuples
                           ,toasttuples
                           ,block_size
                           ,page_hdr
                           ,tblid
                           ,schemaname
                           ,tblname
                           ,fillfactor
                           ,is_na
                           ,n_dead_tup
                           ,n_live_tup
                          FROM (
                               SELECT  tbl.oid                       AS tblid
                                      ,ns.nspname                    AS schemaname
                                      ,tbl.relname                   AS tblname
                                      ,tbl.reltuples                 AS reltuples
                                      ,tbl.relpages                  AS heappages
                                      ,coalesce(toast.relpages, 0)   AS toastpages
                                      ,coalesce(toast.reltuples, 0)  AS toasttuples
                                      ,psat.n_dead_tup               AS n_dead_tup
                                      ,psat.n_live_tup               AS n_live_tup
                                      ,24                            AS page_hdr
                                      ,current_setting('block_size')::numeric AS
 block_size

 ,coalesce(substring( array_to_string(tbl.reloptions, ' ') FROM
 'fillfactor=([0-9]+)')::smallint, 100) AS fillfactor
                                      ,CASE WHEN version()~'mingw32' OR version()~'64-
bit|x86_64|ppc64|ia64|amd64' THEN 8 ELSE 4 END        AS ma
```

```
                                        ,23 + CASE WHEN MAX(coalesce(null_frac,0)) > 0
 THEN ( 7 + count(*) ) / 8 ELSE 0::int END              AS tpl_hdr_size
                                        ,sum( (1-coalesce(s.null_frac, 0)) *
 coalesce(s.avg_width, 1024) )                                  AS tpl_data_size
                                        ,bool_or(att.atttypid =
 'pg_catalog.name'::regtype) OR count(att.attname) <> count(s.attname)         AS is_na
                                   FROM  pg_attribute       AS att
                                   JOIN  pg_class           AS tbl    ON (att.attrelid =
 tbl.oid)
                                   JOIN  pg_stat_all_tables AS psat   ON (tbl.oid =
 psat.relid)
                                   JOIN  pg_namespace       AS ns     ON (ns.oid =
 tbl.relnamespace)
                              LEFT JOIN  pg_stats           AS s      ON
 (s.schemaname=ns.nspname AND s.tablename = tbl.relname AND s.inherited=false AND
 s.attname=att.attname)
                              LEFT JOIN  pg_class           AS toast  ON
 (tbl.reltoastrelid = toast.oid)
                                  WHERE  att.attnum > 0
                                    AND  NOT att.attisdropped
                                    AND  tbl.relkind = 'r'
                               GROUP BY  tbl.oid, ns.nspname, tbl.relname,
 tbl.reltuples, tbl.relpages, toastpages, toasttuples, fillfactor, block_size, ma,
 n_dead_tup, n_live_tup
                               ORDER BY  schemaname, tblname
                            ) AS s
                 ) AS s2
       ) AS s3
 ORDER BY bloat_size DESC
)
  SELECT *
    FROM report
   WHERE bloat_ratio != 0
 -- AND schemaname = 'public'
 -- AND tblname = 'pgbench_accounts'
;

-- WHERE NOT is_na
--   AND tblpages*((pst).free_percent + (pst).dead_tuple_percent)::float4/100 >= 1
```

You can check for table and index bloat in your application. For more information, see Diagnosing table and index bloat.

Find indexes consuming unnecessary space

To find indexes consuming unnecessary space, run the following query.

```
-- WARNING: run with a nonsuperuser role, the query inspects
-- only indexes on tables you have permissions to read.
-- WARNING: rows with is_na = 't' are known to have bad statistics ("name" type is not
 supported).
-- This query is compatible with PostgreSQL 8.2 and later.

SELECT current_database(), nspname AS schemaname, tblname, idxname,
 bs*(relpages)::bigint AS real_size,
  bs*(relpages-est_pages)::bigint AS extra_size,
  100 * (relpages-est_pages)::float / relpages AS extra_ratio,
  fillfactor, bs*(relpages-est_pages_ff) AS bloat_size,
  100 * (relpages-est_pages_ff)::float / relpages AS bloat_ratio,
  is_na
  -- , 100-(sub.pst).avg_leaf_density, est_pages, index_tuple_hdr_bm,
  -- maxalign, pagehdr, nulldatawidth, nulldatahdrwidth, sub.reltuples, sub.relpages
  -- (DEBUG INFO)
FROM (
  SELECT coalesce(1 +
       ceil(reltuples/floor((bs-pageopqdata-pagehdr)/(4+nulldatahdrwidth)::float)), 0
       -- ItemIdData size + computed avg size of a tuple (nulldatahdrwidth)
    ) AS est_pages,
    coalesce(1 +
       ceil(reltuples/floor((bs-pageopqdata-pagehdr)*fillfactor/
(100*(4+nulldatahdrwidth)::float))), 0
    ) AS est_pages_ff,
    bs, nspname, table_oid, tblname, idxname, relpages, fillfactor, is_na
    -- , stattuple.pgstatindex(quote_ident(nspname)||'.'||quote_ident(idxname)) AS
 pst,
    -- index_tuple_hdr_bm, maxalign, pagehdr, nulldatawidth, nulldatahdrwidth,
 reltuples
    -- (DEBUG INFO)
  FROM (
    SELECT maxalign, bs, nspname, tblname, idxname, reltuples, relpages, relam,
 table_oid, fillfactor,
      ( index_tuple_hdr_bm +
          maxalign - CASE -- Add padding to the index tuple header to align on MAXALIGN
            WHEN index_tuple_hdr_bm%maxalign = 0 THEN maxalign
            ELSE index_tuple_hdr_bm%maxalign
          END
```

```
       + nulldatawidth + maxalign - CASE -- Add padding to the data to align on
MAXALIGN
           WHEN nulldatawidth = 0 THEN 0
           WHEN nulldatawidth::integer%maxalign = 0 THEN maxalign
           ELSE nulldatawidth::integer%maxalign
         END
     )::numeric AS nulldatahdrwidth, pagehdr, pageopqdata, is_na
     -- , index_tuple_hdr_bm, nulldatawidth -- (DEBUG INFO)
   FROM (
     SELECT
       i.nspname, i.tblname, i.idxname, i.reltuples, i.relpages, i.relam, a.attrelid
AS table_oid,
       current_setting('block_size')::numeric AS bs, fillfactor,
       CASE -- MAXALIGN: 4 on 32bits, 8 on 64bits (and mingw32 ?)
         WHEN version() ~ 'mingw32' OR version() ~ '64-bit|x86_64|ppc64|ia64|amd64'
THEN 8
         ELSE 4
       END AS maxalign,
       /* per page header, fixed size: 20 for 7.X, 24 for others */
       24 AS pagehdr,
       /* per page btree opaque data */
       16 AS pageopqdata,
       /* per tuple header: add IndexAttributeBitMapData if some cols are null-able */
       CASE WHEN max(coalesce(s.null_frac,0)) = 0
         THEN 2 -- IndexTupleData size
         ELSE 2 + (( 32 + 8 - 1 ) / 8)
         -- IndexTupleData size + IndexAttributeBitMapData size ( max num filed per
index + 8 - 1 /8)
       END AS index_tuple_hdr_bm,
       /* data len: we remove null values save space using it fractionnal part from
stats */
       sum( (1-coalesce(s.null_frac, 0)) * coalesce(s.avg_width, 1024)) AS
nulldatawidth,
       max( CASE WHEN a.atttypid = 'pg_catalog.name'::regtype THEN 1 ELSE 0 END ) > 0
AS is_na
     FROM pg_attribute AS a
       JOIN (
         SELECT nspname, tbl.relname AS tblname, idx.relname AS idxname,
           idx.reltuples, idx.relpages, idx.relam,
           indrelid, indexrelid, indkey::smallint[] AS attnum,
           coalesce(substring(
             array_to_string(idx.reloptions, ' ')
              from 'fillfactor=([0-9]+)')::smallint, 90) AS fillfactor
         FROM pg_index
```

```
            JOIN pg_class idx ON idx.oid=pg_index.indexrelid
            JOIN pg_class tbl ON tbl.oid=pg_index.indrelid
            JOIN pg_namespace ON pg_namespace.oid = idx.relnamespace
          WHERE pg_index.indisvalid AND tbl.relkind = 'r' AND idx.relpages > 0
        ) AS i ON a.attrelid = i.indexrelid
        JOIN pg_stats AS s ON s.schemaname = i.nspname
          AND ((s.tablename = i.tblname AND s.attname =
 pg_catalog.pg_get_indexdef(a.attrelid, a.attnum, TRUE))
          -- stats from tbl
          OR  (s.tablename = i.idxname AND s.attname = a.attname))
          -- stats from functionnal cols
        JOIN pg_type AS t ON a.atttypid = t.oid
      WHERE a.attnum > 0
      GROUP BY 1, 2, 3, 4, 5, 6, 7, 8, 9
    ) AS s1
  ) AS s2
    JOIN pg_am am ON s2.relam = am.oid WHERE am.amname = 'btree'
) AS sub
-- WHERE NOT is_na
ORDER BY 2,3,4;
```

Find tables that are eligible to be autovacuumed

To find tables that are eligible to be autovacuumed, run the following query.

```
--This query shows tables that need vacuuming and are eligible candidates.
--The following query lists all tables that are due to be processed by autovacuum.
-- During normal operation, this query should return very little.
WITH  vbt AS (SELECT setting AS autovacuum_vacuum_threshold
              FROM pg_settings WHERE name = 'autovacuum_vacuum_threshold')
    , vsf AS (SELECT setting AS autovacuum_vacuum_scale_factor
              FROM pg_settings WHERE name = 'autovacuum_vacuum_scale_factor')
    , fma AS (SELECT setting AS autovacuum_freeze_max_age
              FROM pg_settings WHERE name = 'autovacuum_freeze_max_age')
    , sto AS (SELECT opt_oid, split_part(setting, '=', 1) as param,
                split_part(setting, '=', 2) as value
              FROM (SELECT oid opt_oid, unnest(reloptions) setting FROM pg_class) opt)
SELECT
    '"'||ns.nspname||'"."'||c.relname||'"' as relation
    , pg_size_pretty(pg_table_size(c.oid)) as table_size
    , age(relfrozenxid) as xid_age
    , coalesce(cfma.value::float, autovacuum_freeze_max_age::float)
 autovacuum_freeze_max_age
    , (coalesce(cvbt.value::float, autovacuum_vacuum_threshold::float) +
```

```
        coalesce(cvsf.value::float,autovacuum_vacuum_scale_factor::float) *
 c.reltuples)
        as autovacuum_vacuum_tuples
    , n_dead_tup as dead_tuples
FROM pg_class c
JOIN pg_namespace ns ON ns.oid = c.relnamespace
JOIN pg_stat_all_tables stat ON stat.relid = c.oid
JOIN vbt on (1=1)
JOIN vsf ON (1=1)
JOIN fma on (1=1)
LEFT JOIN sto cvbt ON cvbt.param = 'autovacuum_vacuum_threshold' AND c.oid =
 cvbt.opt_oid
LEFT JOIN sto cvsf ON cvsf.param = 'autovacuum_vacuum_scale_factor' AND c.oid =
 cvsf.opt_oid
LEFT JOIN sto cfma ON cfma.param = 'autovacuum_freeze_max_age' AND c.oid = cfma.opt_oid
WHERE c.relkind = 'r'
AND nspname <> 'pg_catalog'
AND (
    age(relfrozenxid) >= coalesce(cfma.value::float, autovacuum_freeze_max_age::float)
    or
    coalesce(cvbt.value::float, autovacuum_vacuum_threshold::float) +
      coalesce(cvsf.value::float,autovacuum_vacuum_scale_factor::float) * c.reltuples
 <= n_dead_tup
    -- or 1 = 1
)
ORDER BY age(relfrozenxid) DESC;
```

Respond to high numbers of connections

When you monitor Amazon CloudWatch, you might find that the `DatabaseConnections` metric spikes. This increase indicates an increased number of connections to your database. We recommend the following approach:

- Limit the number of connections that the application can open with each instance. If your application has an embedded connection pool feature, set a reasonable number of connections. Base the number on what the vCPUs in your instance can parallelize effectively.

  If your application doesn't use a connection pool feature, considering using Amazon RDS Proxy or an alternative. This approach lets your application open multiple connections with the load balancer. The balancer can then open a restricted number of connections with the database. As fewer connections are running in parallel, your DB instance performs less context switching in

the kernel. Queries should progress faster, leading to fewer wait events. For more information, see Amazon RDS Proxy for Aurora.

- Whenever possible, take advantage of reader nodes for Aurora PostgreSQL and read replicas for RDS for PostgreSQL. When your application runs a read-only operation, send these requests to the reader-only endpoint. This technique spreads application requests across all reader nodes, reducing the I/O pressure on the writer node.
- Consider scaling up your DB instance. A higher-capacity instance class gives more memory, which gives Aurora PostgreSQL a larger shared buffer pool to hold pages. The larger size also gives the DB instance more vCPUs to handle connections. More vCPUs are particularly helpful when the operations that are generating `IO:DataFileRead` wait events are writes.

IO:XactSync

The `IO:XactSync` event occurs when the database is waiting for the Aurora storage subsystem to acknowledge the commit of a regular transaction, or the commit or rollback of a prepared transaction. A prepared transaction is part of PostgreSQL's support for a two-phase commit. This event can also occur when a query is waiting for another transaction to commit, particularly in cases where auto-commit is turned off. In such scenarios, updates might appear to be waiting on XactSync even though they haven't been committed yet.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

The event `IO:XactSync` indicates that the instance is spending time waiting for the Aurora storage subsystem to confirm that transaction data was processed.

Likely causes of increased waits

When the `IO:XactSync` event appears more than normal, possibly indicating a performance problem, typical causes include the following:

Network saturation

Traffic between clients and the DB instance or traffic to the storage subsystem might be too heavy for the network bandwidth.

CPU pressure

A heavy workload might be preventing the Aurora storage daemon from getting sufficient CPU time.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Monitor your resources
- Scale up the CPU
- Increase network bandwidth
- Reduce the number of commits

Monitor your resources

To determine the cause of the increased `IO:XactSync` events, check the following metrics:

- `WriteThroughput` and `CommitThroughput` – Changes in write throughput or commit throughput can show an increase in workload.
- `WriteLatency` and `CommitLatency` – Changes in write latency or commit latency can show that the storage subsystem is being asked to do more work.
- `CPUUtilization` – If the instance's CPU utilization is above 90 percent, the Aurora storage daemon might not be getting sufficient time on the CPU. In this case, I/O performance degrades.

For information about these metrics, see Instance-level metrics for Amazon Aurora.

Scale up the CPU

To address CPU starvation issues, consider changing to an instance type with more CPU capacity. For information about CPU capacity for a DB instance class, see Hardware specifications for DB instance classes for Aurora.

Increase network bandwidth

To determine whether the instance is reaching its network bandwidth limits, check for the following other wait events:

- `IO:DataFileRead`, `IO:BufferRead`, `IO:BufferWrite`, and `IO:XactWrite` – Queries using large amounts of I/O can generate more of these wait events.
- `Client:ClientRead` and `Client:ClientWrite` – Queries with large amounts of client communication can generate more of these wait events.

If network bandwidth is an issue, consider changing to an instance type with more network bandwidth. For information about network performance for a DB instance class, see Hardware specifications for DB instance classes for Aurora.

Reduce the number of commits

To reduce the number of commits, combine statements into transaction blocks.

IPC:DamRecordTxAck

The `IPC:DamRecordTxAck` event occurs when Aurora PostgreSQL in a session using database activity streams generates an activity stream event, then waits for that event to become durable.

Topics

- Relevant engine versions
- Context
- Causes
- Actions

Relevant engine versions

This wait event information is relevant for all Aurora PostgreSQL 10.7 and higher 10 versions, 11.4 and higher 11 versions, and all 12 and 13 versions.

Context

In synchronous mode, durability of activity stream events is favored over database performance. While waiting for a durable write of the event, the session blocks other database activity, causing the `IPC:DamRecordTxAck` wait event.

Causes

The most common cause for the `IPC:DamRecordTxAck` event to appear in top waits is that the Database Activity Streams (DAS) feature is a holistic audit. Higher SQL activity generates activity stream events that need to be recorded.

Actions

We recommend different actions depending on the causes of your wait event:

- Reduce the number of SQL statements or turn off database activity streams. Doing this reduces the number of events that require durable writes.
- Change to asynchronous mode. Doing this helps to reduce contention on the `IPC:DamRecordTxAck` wait event.

  However, the DAS feature can't guarantee the durability of every event in asynchronous mode.

IPC:parallel wait events

The following `IPC:parallel wait events` indicate that a session is waiting for inter-process communication related to parallel query execution operations.

- `IPC:BgWorkerStartup` - A process is waiting for a parallel worker process to complete its startup sequence. This happens when initializing workers for parallel query execution.
- `IPC:BgWorkerShutdown` - A process is waiting for a parallel worker process to complete its shutdown sequence. This occurs during the cleanup phase of parallel query execution.
- `IPC:ExecuteGather` - A process is waiting to receive data from parallel worker processes during query execution. This occurs when the leader process needs to gather results from its workers.
- `IPC:ParallelFinish` - A process is waiting for parallel workers to finish their execution and report their final results. This happens during the completion phase of parallel query execution.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

Parallel query execution in PostgreSQL involves multiple processes working together to process a single query. When a query is determined to be suitable for parallelization, a leader process coordinates with one or more parallel worker processes based on the `max_parallel_workers_per_gather` parameter setting. The leader process divides the work among workers, each worker processes its portion of data independently, and results are gathered back to the leader process.

> **Note**
>
> Each parallel worker operates as a separate process with resource requirements similar to a full user session. This means a parallel query with 4 workers can consume up to 5 times the resources (CPU, memory, I/O bandwidth) compared to a non-parallel query, as both the leader process and each worker process maintain their own resource allocations. For instance, settings like `work_mem` are applied individually to each worker, potentially multiplying the total memory usage across all processes.

The parallel query architecture consists of three main components:

- Leader process: The main process that initiates the parallel operation, divides the workload, and coordinates with worker processes.
- Worker processes: Background processes that execute portions of the query in parallel.
- Gather/Gather merge: Operations that combine results from multiple worker processes back to the leader

During parallel execution, processes need to communicate with each other through Inter-Process Communication (IPC) mechanisms. These IPC wait events occur during different phases:

- Worker startup: When parallel workers are being initialized
- Data exchange: When workers are processing data and sending results to the leader
- Worker shutdown: When parallel execution completes and workers are being terminated
- Synchronization points: When processes need to coordinate or wait for other processes to complete their tasks

Understanding these wait events is crucial for diagnosing performance issues related to parallel query execution, especially in high-concurrency environments where multiple parallel queries may be executing simultaneously.

Likely causes of increased waits

Several factors can contribute to an increase in parallel-related IPC wait events:

High concurrency of parallel queries

When many parallel queries are running simultaneously, it can lead to resource contention and increased waiting times for IPC operations. This is particularly common in systems with high transaction volumes or analytical workloads.

Suboptimal parallel query plans

If the query planner chooses inefficient parallel plans, it may result in unnecessary parallelization or poor work distribution among workers. This can lead to increased IPC waits, especially for IPC:ExecuteGather and IPC:ParallelFinish events. These planning issues often stem from outdated statistics and table/index bloat.

Frequent startup and shutdown of parallel workers

Short-lived queries that frequently initiate and terminate parallel workers can cause an increase in `IPC:BgWorkerStartup` and `IPC:BgWorkerShutdown` events. This is often seen in OLTP workloads with many small, parallelizable queries.

Resource constraints

Limited CPU, memory, or I/O capacity can cause bottlenecks in parallel execution, leading to increased wait times across all IPC events. For example, if CPU is saturated, worker processes may take longer to start up or process their portion of work.

Complex query structures

Queries with multiple levels of parallelism (for example, parallel joins followed by parallel aggregations) can lead to more complex IPC patterns and potentially increased wait times, especially for `IPC:ExecuteGather` events.

Large result sets

Queries that produce large result sets may cause increased `IPC:ExecuteGather` wait times as the leader process spends more time collecting and processing results from worker processes.

Understanding these factors can help in diagnosing and addressing performance issues related to parallel query execution in Aurora PostgreSQL.

Actions

When you see waits related to parallel query, it typically means that a backend process is coordinating or waiting on parallel worker processes. These waits are common during execution of parallel plans. You can investigate and mitigate the impact of these waits by monitoring parallel worker usage, reviewing the parameter settings, and tuning query execution and resource allocation.

Topics

- Analyze query plans for inefficient parallelism
- Monitor parallel query usage
- Review and adjust parallel query settings
- Optimize resource allocation
- Investigate connection management
- Review and optimize maintenance operations
- Utilize Query Plan Management (QPM)

Analyze query plans for inefficient parallelism

Parallel query execution can often lead to system instability, CPU spikes, and unpredictable query performance variance. It's crucial to thoroughly analyze whether parallelism actually improves your specific workload. Use EXPLAIN ANALYZE to review parallel query execution plans.

Temporarily disable parallelism at the session level to compare plan efficiency:

```
SET max_parallel_workers_per_gather = 0;
EXPLAIN ANALYZE <your_query>;
```

Re-enable parallelism and compare:

```
RESET max_parallel_workers_per_gather;
EXPLAIN ANALYZE <your_query>;
```

If disabling parallelism yields better or more consistent results, consider disabling it for specific queries at the session level using SET commands. For a broader impact, you might want to disable parallelism at the instance level by adjusting the relevant parameters in your cluster or instance parameter group. For more information, see Amazon Aurora PostgreSQL parameters.

Monitor parallel query usage

Use the following queries to gain visibility into parallel query activity and capacity:

Check active parallel worker processes:

```
SELECT
    COUNT(*)
FROM
    pg_stat_activity
WHERE
    backend_type = 'parallel worker';
```

This query shows the number of active parallel worker processes. A high value may indicate that your `max_parallel_workers` is configured with a high value and you might want to consider reducing it.

Check concurrent parallel queries:

```
SELECT
    COUNT(DISTINCT leader_pid)
FROM
    pg_stat_activity
WHERE
    leader_pid IS NOT NULL;
```

This query returns the number of distinct leader processes that have launched parallel queries. A high number here indicates that multiple sessions are running parallel queries concurrently, which can increase demand on CPU and memory.

Review and adjust parallel query settings

Review the following parameters to ensure they align with your workload:

- `max_parallel_workers`: Total number of parallel workers across all sessions.
- `max_parallel_workers_per_gather`: Max workers per query.

For OLAP workloads, increasing these values can improve performance. For OLTP workloads, lower values are generally preferred.

```
SHOW max_parallel_workers;
SHOW max_parallel_workers_per_gather;
```

Optimize resource allocation

Monitor CPU utilization and consider adjusting the number of vCPUs if consistently high and if your application benefits from parallel queries. Ensure adequate memory is available for parallel operations.

- Use detailed per-query and database counter metrics to determine if the system is CPU-bound.
- Each parallel worker uses its own `work_mem`. Ensure total memory usage is within instance limits.

The parallel queries may consume very substantially more resources than non-parallel queries, because each worker process is a completely separate process which has roughly the same impact

on the system as an additional user session. This should be taken into account when choosing a value for this setting, as well as when configuring other settings that control resource utilization, such as `work_mem`. For more information, see the PostgreSQL documentation. Resource limits such as `work_mem` are applied individually to each worker, which means the total utilization may be much higher across all processes than it would normally be for any single process.

Consider increasing vCPUs or tuning memory parameters if your workload is heavily parallelized.

Investigate connection management

If experiencing connection exhaustion, review application connection pooling strategies. Consider implementing connection pooling at the application level if not already in use.

Review and optimize maintenance operations

Coordinate index creation and other maintenance tasks to prevent resource contention. Consider scheduling these operations during off-peak hours. Avoid scheduling heavy maintenance (for example, parallel index builds) during periods of high user query load. These operations can consume parallel workers and impact performance for regular queries.

Utilize Query Plan Management (QPM)

In Aurora PostgreSQL, the Query Plan Management (QPM) feature is designed to ensure plan adaptability and stability, regardless of database environment changes that might cause query plan regression. For more information, see Overview of Aurora PostgreSQL query plan management.QPM provides some control over the optimizer. Review approved plans in QPM to ensure they align with current parallelism settings. Update or remove outdated plans that may be forcing suboptimal parallel execution.

You can also fix the plans using pg_hint_plan. For more information, see Fixing plans using pg_hint_plan. You can use the hint named `Parallel` to enforce parallel execution. For more information, see the Hints for parallel plans.

IPC:ProcArrayGroupUpdate

The `IPC:ProcArrayGroupUpdate` event occurs when a session is waiting for the group leader to update the transaction status at the end of that operation. While PostgreSQL generally associates IPC type wait events with parallel query operations, this particular wait event is not specific to parallel queries.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

Understanding the process array – The process (proc) array is a shared memory structure in PostgreSQL. It holds information about all running processes, including transaction details. During transaction completion (`COMMIT` or `ROLLBACK`), the ProcArray needs to be updated to reflect the change and clear the transactionID from the array. The session attempting to finish its transaction must acquire an exclusive lock on the ProcArray. This prevents other processes from obtaining shared or exclusive locks on it.

Group update mechanism – While performing a COMMIT or ROLLBACK, if a backend process cannot obtain a ProcArrayLock in exclusive mode, it updates a special field called ProcArrayGroupMember. This adds the transaction to the list of sessions that intend to end. This backend process then sleeps and the time it sleeps is instrumented as the ProcArrayGroupUpdate wait event. The first process in the ProcArray with procArrayGroupMember, referred to as the leader process, acquires the ProcArrayLock in exclusive mode. It then clears the list of processes waiting for group transactionID clearing. Once this completes, the leader releases the ProcArrayLock and then wakes up all processes in this list, notifying them that their transaction is completed.

Likely causes of increased waits

The more processes that are running, the longer a leader will hold on to a procArrayLock in exclusive mode. Consequently, the more write transactions end up in a group update scenario causing a potential pile up of processes waiting on the `ProcArrayGroupUpdate` wait event. In Database Insights' Top SQL view, you will see that COMMIT is the statement with the majority of this wait event. This is expected but will require deeper investigation into the specific write SQL being run to determine what appropriate action to take.

Actions

We recommend different actions depending on the causes of your wait event. Identify `IPC:ProcArrayGroupUpdate` events by using Amazon RDS Performance Insights or by querying the PostgreSQL system view `pg_stat_activity`.

Topics

- Monitoring transaction commit and rollback operations
- Reducing concurrency
- Implementing connection pooling

Monitoring transaction commit and rollback operations

Monitor commits and rollbacks – An increased number of commits and rollbacks can lead to increased pressure on the ProcArray. For example, if a SQL statement begins to fail due to increased duplicate key violations, you may see an increase in rollbacks which can increase ProcArray contention and table bloat.

Amazon RDS Database Insights provides the PostgreSQL metrics `xact_commit` and `xact_rollback` to report the number of commits and rollbacks per second.

Reducing concurrency

Batching transactions – Where possible, batch operations in single transactions to reduce commit/rollback operations.

Limit concurrency – Reduce the number of concurrently active transactions to alleviate lock contention on the ProcArray. While it will require some testing, reducing the total number of concurrent connections can reduce contention and maintain throughput.

Implementing connection pooling

Connection pooling solutions – Use connection pooling to manage database connections efficiently, reducing the total number of backends and therefore the workload on the ProcArray. While it will require some testing, reducing the total number of concurrent connections can reduce contention and maintain throughput.

For more information, see Connection pooling for Aurora PostgreSQL.

Reduce connection storms – Similarly, a pattern of frequently creating and terminating connections causes additional pressure on the ProcArray. By reducing this pattern, overall contention is reduced.

Lock:advisory

The `Lock:advisory` event occurs when a PostgreSQL application uses a lock to coordinate activity across multiple sessions.

Topics

- Relevant engine versions
- Context
- Causes
- Actions

Relevant engine versions

This wait event information is relevant for Aurora PostgreSQL versions 9.6 and higher.

Context

PostgreSQL advisory locks are application-level, cooperative locks explicitly locked and unlocked by the user's application code. An application can use PostgreSQL advisory locks to coordinate activity across multiple sessions. Unlike regular, object- or row-level locks, the application has full control over the lifetime of the lock. For more information, see Advisory Locks in the PostgreSQL documentation.

Advisory locks can be released before a transaction ends or be held by a session across transactions. This isn't true for implicit, system-enforced locks, such as an access-exclusive lock on a table acquired by a `CREATE INDEX` statement.

For a description of the functions used to acquire (lock) and release (unlock) advisory locks, see Advisory Lock Functions in the PostgreSQL documentation.

Advisory locks are implemented on top of the regular PostgreSQL locking system and are visible in the `pg_locks` system view.

Causes

This lock type is exclusively controlled by an application explicitly using it. Advisory locks that are acquired for each row as part of a query can cause a spike in locks or a long-term buildup.

These effects happen when the query is run in a way that acquires locks on more rows than are returned by the query. The application must eventually release every lock, but if locks are acquired on rows that aren't returned, the application can't find all of the locks.

The following example is from Advisory Locks in the PostgreSQL documentation.

```
SELECT pg_advisory_lock(id) FROM foo WHERE id > 12345 LIMIT 100;
```

In this example, the `LIMIT` clause can only stop the query's output after the rows have already been internally selected and their ID values locked. This can happen suddenly when a growing data volume causes the planner to choose a different execution plan that wasn't tested during development. The buildup in this case happens because the application explicitly calls `pg_advisory_unlock` for every ID value that was locked. However, in this case it can't find the set of locks acquired on rows that weren't returned. Because the locks are acquired on the session level, they aren't released automatically at the end of the transaction.

Another possible cause for spikes in blocked lock attempts is unintended conflicts. In these conflicts, unrelated parts of the application share the same lock ID space by mistake.

Actions

Review application usage of advisory locks and detail where and when in the application flow each type of advisory lock is acquired and released.

Determine whether a session is acquiring too many locks or a long-running session isn't releasing locks early enough, leading to a slow buildup of locks. You can correct a slow buildup of session-level locks by ending the session using `pg_terminate_backend(pid)`.

A client waiting for an advisory lock appears in `pg_stat_activity` with `wait_event_type=Lock` and `wait_event=advisory`. You can obtain specific lock values by querying the `pg_locks` system view for the same `pid`, looking for `locktype=advisory` and `granted=f`.

You can then identify the blocking session by querying `pg_locks` for the same advisory lock having `granted=t`, as shown in the following example.

```
SELECT blocked_locks.pid AS blocked_pid,
         blocking_locks.pid AS blocking_pid,
         blocked_activity.usename AS blocked_user,
         blocking_activity.usename AS blocking_user,
         now() - blocked_activity.xact_start AS blocked_transaction_duration,
         now() - blocking_activity.xact_start AS blocking_transaction_duration,
         concat(blocked_activity.wait_event_type,':',blocked_activity.wait_event) AS
 blocked_wait_event,
         concat(blocking_activity.wait_event_type,':',blocking_activity.wait_event) AS
 blocking_wait_event,
         blocked_activity.state AS blocked_state,
         blocking_activity.state AS blocking_state,
         blocked_locks.locktype AS blocked_locktype,
         blocking_locks.locktype AS blocking_locktype,
         blocked_activity.query AS blocked_statement,
         blocking_activity.query AS blocking_statement
    FROM pg_catalog.pg_locks blocked_locks
    JOIN pg_catalog.pg_stat_activity blocked_activity ON blocked_activity.pid =
 blocked_locks.pid
    JOIN pg_catalog.pg_locks blocking_locks
        ON blocking_locks.locktype = blocked_locks.locktype
        AND blocking_locks.DATABASE IS NOT DISTINCT FROM blocked_locks.DATABASE
        AND blocking_locks.relation IS NOT DISTINCT FROM blocked_locks.relation
        AND blocking_locks.page IS NOT DISTINCT FROM blocked_locks.page
        AND blocking_locks.tuple IS NOT DISTINCT FROM blocked_locks.tuple
        AND blocking_locks.virtualxid IS NOT DISTINCT FROM blocked_locks.virtualxid
        AND blocking_locks.transactionid IS NOT DISTINCT FROM
 blocked_locks.transactionid
        AND blocking_locks.classid IS NOT DISTINCT FROM blocked_locks.classid
        AND blocking_locks.objid IS NOT DISTINCT FROM blocked_locks.objid
        AND blocking_locks.objsubid IS NOT DISTINCT FROM blocked_locks.objsubid
        AND blocking_locks.pid != blocked_locks.pid
    JOIN pg_catalog.pg_stat_activity blocking_activity ON blocking_activity.pid =
 blocking_locks.pid
    WHERE NOT blocked_locks.GRANTED;
```

All of the advisory lock API functions have two sets of arguments, either one `bigint` argument or two `integer` arguments:

- For the API functions with one `bigint` argument, the upper 32 bits are in `pg_locks.classid` and the lower 32 bits are in `pg_locks.objid`.

- For the API functions with two `integer` arguments, the first argument is `pg_locks.classid` and the second argument is `pg_locks.objid`.

The `pg_locks.objsubid` value indicates which API form was used: 1 means one `bigint` argument; 2 means two `integer` arguments.

Lock:extend

The `Lock:extend` event occurs when a backend process is waiting to lock a relation to extend it while another process has a lock on that relation for the same purpose.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

The event `Lock:extend` indicates that a backend process is waiting to extend a relation that another backend process holds a lock on while it's extending that relation. Because only one process at a time can extend a relation, the system generates a `Lock:extend` wait event. `INSERT`, `COPY`, and `UPDATE` operations can generate this event.

Likely causes of increased waits

When the `Lock:extend` event appears more than normal, possibly indicating a performance problem, typical causes include the following:

Surge in concurrent inserts or updates to the same table

There might be an increase in the number of concurrent sessions with queries that insert into or update the same table.

Insufficient network bandwidth

The network bandwidth on the DB instance might be insufficient for the storage communication needs of the current workload. This can contribute to storage latency that causes an increase in `Lock:extend` events.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Reduce concurrent inserts and updates to the same relation
- Increase network bandwidth

Reduce concurrent inserts and updates to the same relation

First, determine whether there's an increase in `tup_inserted` and `tup_updated` metrics and an accompanying increase in this wait event. If so, check which relations are in high contention for insert and update operations. To determine this, query the `pg_stat_all_tables` view for the values in `n_tup_ins` and `n_tup_upd` fields. For information about the `pg_stat_all_tables` view, see pg_stat_all_tables in the PostgreSQL documentation.

To get more information about blocking and blocked queries, query `pg_stat_activity` as in the following example:

```
SELECT
    blocked.pid,
    blocked.usename,
    blocked.query,
    blocking.pid AS blocking_id,
    blocking.query AS blocking_query,
    blocking.wait_event AS blocking_wait_event,
    blocking.wait_event_type AS blocking_wait_event_type
FROM pg_stat_activity AS blocked
JOIN pg_stat_activity AS blocking ON blocking.pid = ANY(pg_blocking_pids(blocked.pid))
where
blocked.wait_event = 'extend'
and blocked.wait_event_type = 'Lock';
```

```
   pid  | usename  |            query             | blocking_id |
           blocking_query                          | blocking_wait_event |
 blocking_wait_event_type
  ------+---------+------------------------------+-------------
+-------------------------------------------------------------------
+---------------------+--------------------------
   7143 |  myuser  | insert into tab1 values (1); |        4600 | INSERT INTO tab1 (a)
 SELECT s FROM generate_series(1,1000000) s; | DataFileExtend      | IO
```

After you identify relations that contribute to increase `Lock:extend` events, use the following techniques to reduce the contention:

- Find out whether you can use partitioning to reduce contention for the same table. Separating inserted or updated tuples into different partitions can reduce contention. For information about partitioning, see Managing PostgreSQL partitions with the pg_partman extension.
- If the wait event is mainly due to update activity, consider reducing the relation's fillfactor value. This can reduce requests for new blocks during the update. The fillfactor is a storage parameter for a table that determines the maximum amount of space for packing a table page. It's expressed as a percentage of the total space for a page. For more information about the fillfactor parameter, see CREATE TABLE in the PostgreSQL documentation.

  > **Important**
  >
  > We highly recommend that you test your system if you change the fillfactor because changing this value can negatively impact performance, depending on your workload.

Increase network bandwidth

To see whether there's an increase in write latency, check the `WriteLatency` metric in CloudWatch. If there is, use the `WriteThroughput` and `ReadThroughput` Amazon CloudWatch metrics to monitor the storage related traffic on the DB cluster. These metrics can help you to determine if network bandwidth is sufficient for the storage activity of your workload.

If your network bandwidth isn't enough, increase it. If your DB instance is reaching the network bandwidth limits, the only way to increase the bandwidth is to increase your DB instance size.

For more information about CloudWatch metrics, see Amazon CloudWatch metrics for Amazon Aurora. For information about network performance for each DB instance class, see Hardware specifications for DB instance classes for Aurora.

Lock:Relation

The `Lock:Relation` event occurs when a query is waiting to acquire a lock on a table or view (relation) that's currently locked by another transaction.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

Most PostgreSQL commands implicitly use locks to control concurrent access to data in tables. You can also use these locks explicitly in your application code with the `LOCK` command. Many lock modes aren't compatible with each other, and they can block transactions when they're trying to access the same object. When this happens, Aurora PostgreSQL generates a `Lock:Relation` event. Some common examples are the following:

- Exclusive locks such as `ACCESS EXCLUSIVE` can block all concurrent access. Data definition language (DDL) operations such as `DROP TABLE`, `TRUNCATE`, `VACUUM FULL`, and `CLUSTER` acquire `ACCESS EXCLUSIVE` locks implicitly. `ACCESS EXCLUSIVE` is also the default lock mode for `LOCK TABLE` statements that don't specify a mode explicitly.
- Using `CREATE INDEX (without CONCURRENT)` on a table conflicts with data manipulation language (DML) statements `UPDATE`, `DELETE`, and `INSERT`, which acquire `ROW EXCLUSIVE` locks.

For more information about table-level locks and conflicting lock modes, see Explicit Locking in the PostgreSQL documentation.

Blocking queries and transactions typically unblock in one of the following ways:

- Blocking query – The application can cancel the query or the user can end the process. The engine can also force the query to end because of a session's statement-timeout or a deadlock detection mechanism.
- Blocking transaction – A transaction stops blocking when it runs a `ROLLBACK` or `COMMIT` statement. Rollbacks also happen automatically when sessions are disconnected by a client or by network issues, or are ended. Sessions can be ended when the database engine is shut down, when the system is out of memory, and so forth.

Likely causes of increased waits

When the `Lock:Relation` event occurs more frequently than normal, it can indicate a performance issue. Typical causes include the following:

Increased concurrent sessions with conflicting table locks

There might be an increase in the number of concurrent sessions with queries that lock the same table with conflicting locking modes.

Maintenance operations

Health maintenance operations such as `VACUUM` and `ANALYZE` can significantly increase the number of conflicting locks. `VACUUM FULL` acquires an `ACCESS EXCLUSIVE` lock, and `ANALYZE` acquires a `SHARE UPDATE EXCLUSIVE` lock. Both types of locks can cause a `Lock:Relation` wait event. Application data maintenance operations such as refreshing a materialized view can also increase blocked queries and transactions.

Locks on reader instances

There might be a conflict between the relation locks held by the writer and readers. Currently, only `ACCESS EXCLUSIVE` relation locks are replicated to reader instances. However, the `ACCESS EXCLUSIVE` relation lock will conflict with any `ACCESS SHARE` relation locks held by the reader. This can cause an increase in lock relation wait events on the reader.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Reduce the impact of blocking SQL statements

- Minimize the effect of maintenance operations
- Check for reader locks

Reduce the impact of blocking SQL statements

To reduce the impact of blocking SQL statements, modify your application code where possible. Following are two common techniques for reducing blocks:

- Use the `NOWAIT` option – Some SQL commands, such as `SELECT` and `LOCK` statements, support this option. The `NOWAIT` directive cancels the lock-requesting query if the lock can't be acquired immediately. This technique can help prevent a blocking session from causing a pile-up of blocked sessions behind it.

  For example: Assume that transaction A is waiting on a lock held by transaction B. Now, if B requests a lock on a table that's locked by transaction C, transaction A might be blocked until transaction C completes. But if transaction B uses a `NOWAIT` when it requests the lock on C, it can fail fast and ensure that transaction A doesn't have to wait indefinitely.
- Use `SET lock_timeout` – Set a `lock_timeout` value to limit the time a SQL statement waits to acquire a lock on a relation. If the lock isn't acquired within the timeout specified, the transaction requesting the lock is canceled. Set this value at the session level.

Minimize the effect of maintenance operations

Maintenance operations such as `VACUUM` and `ANALYZE` are important. We recommend that you don't turn them off because you find `Lock:Relation` wait events related to these maintenance operations. The following approaches can minimize the effect of these operations:

- Run maintenance operations manually during off-peak hours.
- To reduce `Lock:Relation` waits caused by autovacuum tasks, perform any needed autovacuum tuning. For information about tuning autovacuum, see Working with PostgreSQL autovacuum on Amazon RDS in the *Amazon RDS User Guide*.

Check for reader locks

You can see how concurrent sessions on a writer and readers might be holding locks that block each other. One way to do this is by running queries that return the lock type and relation. In the

table, you can find a sequence of queries to two such concurrent sessions, a writer session and a reader session.

The replay process waits for the duration of `max_standby_streaming_delay` before canceling the reader query. As shown in the example, the lock timeout of 100ms is well below the default `max_standby_streaming_delay` of 30 seconds. The lock times out before it's an issue.

Sequence event	Session	Command or Output

Sets an environment variable called READER with the specified value and tries to connect to the DB instance with this endpoint.	Reader session	CLI command:
		`export READER=aurorapg2.1234567890.us-west-1.rds.amazonaws.com`
		`psql -h $READER`
		Output:
		`psql (15devel, server 10.14)`
		`Type "help" for help.`

Sets an environment variable called WRITER and tries to connect to the DB instance with this endpoint .	Writer session	CLI command:
		`export WRITER=aurorapg1.1234567890.us-west-1.rds.amazonaws.com`
		`psql -h $WRITER`
		Output:
		`psql (15devel, server 10.14)`
		`Type "help" for help.`

Sequence event	Session	Command or Output

The writer session creates table t1 on the writer instance.	Writer session	PostgreSQL query:
		`postgres=> CREATE TABLE t1(b integer);`
		`CREATE TABLE`

If there are no conflicting queries on the writer, the ACCESS EXCLUSIVE lock is acquired on the writer immediately.	Writer session	`ACCESS EXCLUSIVE` lock enabled

The reader session sets a lock timeout interval of 100 milliseconds.	Reader session	PostgreSQL query:
		`postgres=> SET lock_timeout=100;`
		`SET`

The reader session tries to read data from table t1 on the reader instance.	Reader session	PostgreSQL query:
		`postgres=> SELECT * FROM t1;`
		Sample output:
		`b`
		`---`
		`(0 rows)`

Sequence event	Session	Command or Output

The writer session drops t1.	Writer session	PostgreSQL query:
		`postgres=> BEGIN;`
		`BEGIN`
		`postgres=> DROP TABLE t1;`
		`DROP TABLE`
		`postgres=>`

The query times out and is canceled on the reader.	Reader session	PostgreSQL query:
		`postgres=> SELECT * FROM t1;`
		Sample output:
		`ERROR: canceling statement due to lock timeout`
		`LINE 1: SELECT * FROM t1;`
		`^`

To determine the cause of the error. the reader session queries `pg_locks` and `pg_stat_activity`	Reader session	PostgreSQL query:
		`postgres=> SELECT locktype, relation, mode, backend_type`
		`postgres=> FROM pg_locks l, pg_stat_activity t1`
		`postgres=> WHERE l.pid=t1.pid AND relation = 't1'::regclass::oid;`

Sequence event	Session	Command or Output

The result indicates that the `aurora wal replay` process is holding an `ACCESS EXCLUSIVE` lock on table t1.	Reader session	Query result:
		`locktype | relation | mode | backend_type`
		`----------+----------+------------------+---------------`
		`relation | 68628525 | AccessExclusiveLock | aurora wal replay`
		`(1 row)`

Lock:transactionid

The `Lock:transactionid` event occurs when a transaction is waiting for a row-level lock.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

The event `Lock:transactionid` occurs when a transaction is trying to acquire a row-level lock that has already been granted to a transaction that is running at the same time. The session that shows the `Lock:transactionid` wait event is blocked because of this lock. After the blocking transaction ends in either a `COMMIT` or `ROLLBACK` statement, the blocked transaction can proceed.

The multiversion concurrency control semantics of Aurora PostgreSQL guarantee that readers don't block writers and writers don't block readers. For row-level conflicts to occur, blocking and blocked transactions must issue conflicting statements of the following types:

- `UPDATE`
- `SELECT ... FOR UPDATE`
- `SELECT ... FOR KEY SHARE`

The statement `SELECT ... FOR KEY SHARE` is a special case. The database uses the clause `FOR KEY SHARE` to optimize the performance of referential integrity. A row-level lock on a row can block `INSERT`, `UPDATE`, and `DELETE` commands on other tables that reference the row.

Likely causes of increased waits

When this event appears more than normal, the cause is typically `UPDATE`, `SELECT ... FOR UPDATE`, or `SELECT ... FOR KEY SHARE` statements combined with the following conditions.

Topics

- High concurrency
- Idle in transaction
- Long-running transactions

High concurrency

Aurora PostgreSQL can use granular row-level locking semantics. The probability of row-level conflicts increases when the following conditions are met:

- A highly concurrent workload contends for the same rows.
- Concurrency increases.

Idle in transaction

Sometimes the `pg_stat_activity.state` column shows the value `idle in transaction`. This value appears for sessions that have started a transaction, but haven't yet issued a `COMMIT` or `ROLLBACK`. If the `pg_stat_activity.state` value isn't `active`, the query shown in `pg_stat_activity` is the most recent one to finish running. The blocking session isn't actively processing a query because an open transaction is holding a lock.

If an idle transaction acquired a row-level lock, it might be preventing other sessions from acquiring it. This condition leads to frequent occurrence of the wait event `Lock:transactionid`. To diagnose the issue, examine the output from `pg_stat_activity` and `pg_locks`.

Long-running transactions

Transactions that run for a long time get locks for a long time. These long-held locks can block other transactions from running.

Actions

Row-locking is a conflict among `UPDATE`, `SELECT ... FOR UPDATE`, or `SELECT ... FOR KEY SHARE` statements. Before attempting a solution, find out when these statements are running on the same row. Use this information to choose a strategy described in the following sections.

Topics

- Respond to high concurrency
- Respond to idle transactions
- Respond to long-running transactions

Respond to high concurrency

If concurrency is the issue, try one of the following techniques:

- Lower the concurrency in the application. For example, decrease the number of active sessions.
- Implement a connection pool. To learn how to pool connections with RDS Proxy, see Amazon RDS Proxy for Aurora.
- Design the application or data model to avoid contending `UPDATE` and `SELECT ... FOR UPDATE` statements. You can also decrease the number of foreign keys accessed by `SELECT ... FOR KEY SHARE` statements.

Respond to idle transactions

If `pg_stat_activity.state` shows `idle in transaction`, use the following strategies:

- Turn on autocommit wherever possible. This approach prevents transactions from blocking other transactions while waiting for a `COMMIT` or `ROLLBACK`.
- Search for code paths that are missing `COMMIT`, `ROLLBACK`, or `END`.

- Make sure that the exception handling logic in your application always has a path to a valid `end of transaction`.
- Make sure that your application processes query results after ending the transaction with `COMMIT` or `ROLLBACK`.

Respond to long-running transactions

If long-running transactions are causing the frequent occurrence of `Lock:transactionid`, try the following strategies:

- Keep row locks out of long-running transactions.
- Limit the length of queries by implementing autocommit whenever possible.

Lock:tuple

The `Lock:tuple` event occurs when a backend process is waiting to acquire a lock on a tuple.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

The event `Lock:tuple` indicates that a backend is waiting to acquire a lock on a tuple while another backend holds a conflicting lock on the same tuple. The following table illustrates a scenario in which sessions generate the `Lock:tuple` event.

Time	Session 1	Session 2	Session 3
t1	Starts a transaction.		

Time	Session 1	Session 2	Session 3
t2	Updates row 1.		
t3		Updates row 1. The session acquires an exclusive lock on the tuple and then waits for session 1 to release the lock by committing or rolling back.	
t4			Updates row 1. The session waits for session 2 to release the exclusive lock on the tuple.

Or you can simulate this wait event by using the benchmarking tool pgbench. Configure a high number of concurrent sessions to update the same row in a table with a custom SQL file.

To learn more about conflicting lock modes, see Explicit Locking in the PostgreSQL documentation. To learn more about pgbench, see pgbench in the PostgreSQL documentation.

Likely causes of increased waits

When this event appears more than normal, possibly indicating a performance problem, typical causes include the following:

- A high number of concurrent sessions are trying to acquire a conflicting lock for the same tuple by running `UPDATE` or `DELETE` statements.
- Highly concurrent sessions are running a `SELECT` statement using the `FOR UPDATE` or `FOR NO KEY UPDATE` lock modes.
- Various factors drive application or connection pools to open more sessions to execute the same operations. As new sessions are trying to modify the same rows, DB load can spike, and `Lock:tuple` can appear.

For more information, see Row-Level Locks in the PostgreSQL documentation.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Investigate your application logic
- Find the blocker session
- Reduce concurrency when it is high
- Troubleshoot bottlenecks

Investigate your application logic

Find out whether a blocker session has been in the `idle in transaction` state for long time. If so, consider ending the blocker session as a short-term solution. You can use the `pg_terminate_backend` function. For more information about this function, see Server Signaling Functions in the PostgreSQL documentation.

For a long-term solution, do the following:

- Adjust the application logic.
- Use the `idle_in_transaction_session_timeout` parameter. This parameter ends any session with an open transaction that has been idle for longer than the specified amount of time. For more information, see Client Connection Defaults in the PostgreSQL documentation.
- Use autocommit as much as possible. For more information, see SET AUTOCOMMIT in the PostgreSQL documentation.

Find the blocker session

While the `Lock:tuple` wait event is occurring, identify the blocker and blocked session by finding out which locks depend on one another. For more information, see Lock dependency information in the PostgreSQL wiki. To analyze past `Lock:tuple` events, use the Aurora function `aurora_stat_backend_waits`.

The following example queries all sessions, filtering on `tuple` and ordering by `wait_time`.

```
--AURORA_STAT_BACKEND_WAITS
      SELECT a.pid,
             a.usename,
```

```
            a.app_name,
            a.current_query,
            a.current_wait_type,
            a.current_wait_event,
            a.current_state,
            wt.type_name AS wait_type,
            we.event_name AS wait_event,
            a.waits,
            a.wait_time
        FROM (SELECT pid,
                     usename,
                     left(application_name,16) AS app_name,
                     coalesce(wait_event_type,'CPU') AS current_wait_type,
                     coalesce(wait_event,'CPU') AS current_wait_event,
                     state AS current_state,
                     left(query,80) as current_query,
                     (aurora_stat_backend_waits(pid)).*
                FROM pg_stat_activity
               WHERE pid <> pg_backend_pid()
                 AND usename<>'rdsadmin') a
NATURAL JOIN aurora_stat_wait_type() wt
NATURAL JOIN aurora_stat_wait_event() we
WHERE we.event_name = 'tuple'
    ORDER BY a.wait_time;

  pid  | usename | app_name |                 current_query                  |
 current_wait_type | current_wait_event | current_state | wait_type | wait_event |
 waits | wait_time
-------+---------+----------+------------------------------------------------
+------------------+--------------------+--------------+-----------+------------
+-------+-----------
 32136 | sys     | psql     | /*session3*/ update tab set col=1 where col=1; | Lock
           | tuple              | active        | Lock      | tuple      |     1 |
 1000018
 11999 | sys     | psql     | /*session4*/ update tab set col=1 where col=1; | Lock
           | tuple              | active        | Lock      | tuple      |     1 |
 1000024
```

Reduce concurrency when it is high

The `Lock:tuple` event might occur constantly, especially in a busy workload time. In this situation, consider reducing the high concurrency for very busy rows. Often, just a few rows control a queue or the Boolean logic, which makes these rows very busy.

You can reduce concurrency by using different approaches based in the business requirement, application logic, and workload type. For example, you can do the following:

- Redesign your table and data logic to reduce high concurrency.
- Change the application logic to reduce high concurrency at the row level.
- Leverage and redesign queries with row-level locks.
- Use the `NOWAIT` clause with retry operations.
- Consider using optimistic and hybrid-locking logic concurrency control.
- Consider changing the database isolation level.

Troubleshoot bottlenecks

The `Lock:tuple` can occur with bottlenecks such as CPU starvation or maximum usage of Amazon EBS bandwidth. To reduce bottlenecks, consider the following approaches:

- Scale up your instance class type.
- Optimize resource-intensive queries.
- Change the application logic.
- Archive data that is rarely accessed.

LWLock:buffer_content (BufferContent)

The `LWLock:buffer_content` event occurs when a session is waiting to read or write a data page in memory while another session has that page locked for writing. In Aurora PostgreSQL 13 and higher, this wait event is called `BufferContent`.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

To read or manipulate data, PostgreSQL accesses it through shared memory buffers. To read from the buffer, a process gets a lightweight lock (LWLock) on the buffer content in shared mode. To write to the buffer, it gets that lock in exclusive mode. Shared locks allow other processes to concurrently acquire shared locks on that content. Exclusive locks prevent other processes from getting any type of lock on it.

The `LWLock:buffer_content` (`BufferContent`) event indicates that multiple processes are attempting to get lightweight locks (LWLocks) on contents of a specific buffer.

Likely causes of increased waits

When the `LWLock:buffer_content` (`BufferContent`) event appears more than normal, possibly indicating a performance problem, typical causes include the following:

Increased concurrent updates to the same data

There might be an increase in the number of concurrent sessions with queries that update the same buffer content. This contention can be more pronounced on tables with a lot of indexes.

Workload data is not in memory

When data that the active workload is processing is not in memory, these wait events can increase. This effect is because processes holding locks can keep them longer while they perform disk I/O operations.

Excessive use of foreign key constraints

Foreign key constraints can increase the amount of time a process holds onto a buffer content lock. This effect is because read operations require a shared buffer content lock on the referenced key while that key is being updated.

Actions

We recommend different actions depending on the causes of your wait event. You might identify `LWLock:buffer_content` (`BufferContent`) events by using Amazon RDS Performance Insights or by querying the view `pg_stat_activity`.

Topics

- Improve in-memory efficiency

- Reduce usage of foreign key constraints
- Remove unused indexes
- Remove duplicate indexes
- Drop or REINDEX invalid indexes
- Use partial indexes
- Remove table and index bloat

Improve in-memory efficiency

To increase the chance that active workload data is in memory, partition tables or scale up your instance class. For information about DB instance classes, see Amazon AuroraDB instance classes.

Monitor the `BufferCacheHitRatio` metric, which measures the percentage of requests served by the buffer cache of a DB instance in your DB cluster. This metric provides insight into the amount of data being served from memory. A high hit ratio indicates that your DB instance has sufficient memory available for your working data set, while a low ratio suggests that your queries are frequently accessing data from storage.

The cache read hit per table and cache read hit per index under Memory setting section of the PG Collector report can provide insights into the tables and indexes cache hit ratio.

Reduce usage of foreign key constraints

Investigate workloads experiencing high numbers of `LWLock:buffer_content` (`BufferContent`) wait events for usage of foreign key constraints. Remove unnecessary foreign key constraints.

Remove unused indexes

For workloads experiencing high numbers of `LWLock:buffer_content` (`BufferContent`) wait events, identify unused indexes and remove them.

The unused indexes section of the PG Collector report can provide insights into the unused indexes in the database.

Remove duplicate indexes

Identify duplicate indexes and remove them.

The duplicate indexes section of the PG Collector report can provide insights into the duplicate indexes in the database.

Drop or REINDEX invalid indexes

Invalid indexes typically occur when using `CREATE INDEX CONCURRENTLY` or `REINDEX CONCURRENTLY` and the command fails or is aborted.

Invalid indexes can't be used for queries, though they will still be updated and take up disk space.

The Invalid indexes section of the PG Collector report can provide insights into the invalid indexes in the database.

Use partial indexes

Partial indexes can be leveraged to enhance query performance and reduce index size. A partial index is an index built over a subset of a table, with the subset defined by a conditional expression. As detailed in the partial index documentation, partial indexes can reduce the overhead of maintaining indexes, as PostgreSQL does not need to update the index in all cases.

Remove table and index bloat

Excessive table and index bloat can negatively impact database performance. Bloated tables and indexes increase the active working set size, degrading in-memory efficiency. Additionally, bloat increases storage costs and slows query execution. To diagnose bloat, refer to the Diagnosing table and index bloat. Further, the Fragmentation (Bloat) section of the PG Collector report can provide insights into tables and indexes bloat.

To address table and index bloat, there are a few options:

VACUUM FULL

`VACUUM FULL` creates a new copy of the table, copying over only the live tuples, and then replaces the old table with the new one while holding an `ACCESS EXCLUSIVE` lock. This prevents any reading or writing to the table, which can cause an outage. Additionally, `VACUUM FULL` will take longer if the table is large.

pg_repack

The `pg_repack` is helpful in situations where `VACUUM FULL` might not be suitable. It creates a new table that contains the data of the bloated table, tracks the changes from the original

table, and then replaces the original table with the new one. It doesn't lock the original table for read or write operations while it's building the new table. For more information, for how to use `pg_repack`, see Removing bloat with pg_repack and pg_repack.

REINDEX

The `REINDEX` command can be leveraged to address index bloat. `REINDEX` writes a new version of the index without the dead pages or the empty or nearly-empty pages, thereby reducing the space consumption of the index. For detailed information about the `REINDEX` command, please refer to the REINDEX documentation.

After removing bloat from tables and indexes, it may be necessary to increase the autovacuum frequency on those tables. Implementing aggressive autovacuum settings at the table level can help prevent future bloat from occurring. For more information, please refer to the documentation on `Vacuuming and analyzing tables automatically`.

LWLock:buffer_mapping

This event occurs when a session is waiting to associate a data block with a buffer in the shared buffer pool.

> **Note**
>
> This event appears as `LWLock:buffer_mapping` in Aurora PostgreSQL version 12 and lower, and `LWLock:BufferMapping` in version 13 and higher.

Topics

- Supported engine versions
- Context
- Causes
- Actions

Supported engine versions

This wait event information is relevant for Aurora PostgreSQL version 9.6 and higher.

Context

The *shared buffer pool* is an Aurora PostgreSQL memory area that holds all pages that are or were being used by processes. When a process needs a page, it reads the page into the shared buffer pool. The `shared_buffers` parameter sets the shared buffer size and reserves a memory area to store the table and index pages. If you change this parameter, make sure to restart the database. For more information, see Shared buffers.

The `LWLock:buffer_mapping` wait event occurs in the following scenarios:

- A process searches the buffer table for a page and acquires a shared buffer mapping lock.
- A process loads a page into the buffer pool and acquires an exclusive buffer mapping lock.
- A process removes a page from the pool and acquires an exclusive buffer mapping lock.

Causes

When this event appears more than normal, possibly indicating a performance problem, the database is paging in and out of the shared buffer pool. Typical causes include the following:

- Large queries
- Bloated indexes and tables
- Full table scans
- A shared pool size that is smaller than the working set

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Monitor buffer-related metrics
- Assess your indexing strategy
- Reduce the number of buffers that must be allocated quickly

Monitor buffer-related metrics

When LWLock:buffer_mapping waits spike, investigate the buffer hit ratio. You can use these metrics to get a better understanding of what is happening in the buffer cache. Examine the following metrics:

BufferCacheHitRatio

This Amazon CloudWatch metric measures the percentage of requests that are served by the buffer cache of a DB instance in your DB cluster. You might see this metric decrease in the lead-up to the LWLock:buffer_mapping wait event.

blks_hit

This database counter metric indicates the number of blocks that were retrieved from the shared buffer pool. After the LWLock:buffer_mapping wait event appears, you might observe a spike in blks_hit.

blks_read

This database counter metric indicates the number of blocks that required I/O to be read into the shared buffer pool. You might observe a spike in blks_read in the lead-up to the LWLock:buffer_mapping wait event.

Assess your indexing strategy

To confirm that your indexing strategy is not degrading performance, check the following:

Index bloat

Ensure that index and table bloat aren't leading to unnecessary pages being read into the shared buffer. If your tables contain unused rows, consider archiving the data and removing the rows from the tables. You can then rebuild the indexes for the resized tables.

Indexes for frequently used queries

To determine whether you have the optimal indexes, monitor DB engine metrics in Performance Insights. The tup_returned metric shows the number of rows read. The tup_fetched metric shows the number of rows returned to the client. If tup_returned is significantly larger than tup_fetched, the data might not be properly indexed. Also, your table statistics might not be current.

Reduce the number of buffers that must be allocated quickly

To reduce the `LWLock:buffer_mapping` wait events, try to reduce the number of buffers that must be allocated quickly. One strategy is to perform smaller batch operations. You might be able to achieve smaller batches by partitioning your tables.

LWLock:BufferIO (IPC:BufferIO)

The `LWLock:BufferIO` event occurs when Aurora PostgreSQL or RDS for PostgreSQL is waiting for other processes to finish their input/output (I/O) operations when concurrently trying to access a page. Its purpose is for the same page to be read into the shared buffer.

Topics

- Relevant engine versions
- Context
- Causes
- Actions

Relevant engine versions

This wait event information is relevant for all Aurora PostgreSQL versions. For Aurora PostgreSQL 12 and earlier versions this wait event is named as lwlock:buffer_io whereas in Aurora PostgreSQL 13 version it is named as lwlock:bufferio. From Aurora PostgreSQL 14 version BufferIO wait event moved from `LWLock` to `IPC` wait event type (IPC:BufferIO).

Context

Each shared buffer has an I/O lock that is associated with the `LWLock:BufferIO` wait event, each time a block (or a page) has to be retrieved outside the shared buffer pool.

This lock is used to handle multiple sessions that all require access to the same block. This block has to be read from outside the shared buffer pool, defined by the `shared_buffers` parameter.

As soon as the page is read inside the shared buffer pool, the `LWLock:BufferIO` lock is released.

> **Note**
>
> The `LWLock:BufferIO` wait event precedes the IO:DataFileRead wait event. The `IO:DataFileRead` wait event occurs while data is being read from storage.

For more information on lightweight locks, see Locking Overview.

Causes

Common causes for the `LWLock:BufferIO` event to appear in top waits include the following:

- Multiple backends or connections trying to access the same page that's also pending an I/O operation
- The ratio between the size of the shared buffer pool (defined by the `shared_buffers` parameter) and the number of buffers needed by the current workload
- The size of the shared buffer pool not being well balanced with the number of pages being evicted by other operations
- Large or bloated indexes that require the engine to read more pages than necessary into the shared buffer pool
- Lack of indexes that forces the DB engine to read more pages from the tables than necessary
- Sudden spikes for database connections trying to perform operations on the same page

Actions

We recommend different actions depending on the causes of your wait event:

- Observe Amazon CloudWatch metrics for correlation between sharp decreases in the `BufferCacheHitRatio` and `LWLock:BufferIO` wait events. This effect can mean that you have a small shared buffers setting. You might need to increase it or scale up your DB instance class. You can split your workload into more reader nodes.
- Verify whether you have unused indexes, then remove them.
- Use partitioned tables (which also have partitioned indexes). Doing this helps to keep index reordering low and reduces its impact.
- Avoid indexing columns unnecessarily.
- Prevent sudden database connection spikes by using a connection pool.

- Restrict the maximum number of connections to the database as a best practice.

LWLock:lock_manager

This event occurs when the Aurora PostgreSQL engine maintains the shared lock's memory area to allocate, check, and deallocate a lock when a fast path lock isn't possible.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is relevant for Aurora PostgreSQL version 9.6 and higher.

Context

When you issue a SQL statement, Aurora PostgreSQL records locks to protect the structure, data, and integrity of your database during concurrent operations. The engine can achieve this goal using a fast path lock or a path lock that isn't fast. A path lock that isn't fast is more expensive and creates more overhead than a fast path lock.

Fast path locking

To reduce the overhead of locks that are taken and released frequently, but that rarely conflict, backend processes can use fast path locking. The database uses this mechanism for locks that meet the following criteria:

- They use the DEFAULT lock method.
- They represent a lock on a database relation rather than a shared relation.
- They are weak locks that are unlikely to conflict.
- The engine can quickly verify that no conflicting locks can possibly exist.

The engine can't use fast path locking when either of the following conditions is true:

- The lock doesn't meet the preceding criteria.
- No more slots are available for the backend process.

For more information about fast path locking, see fast path in the PostgreSQL lock manager README and pg-locks in the PostgreSQL documentation.

Example of a scaling problem for the lock manager

In this example, a table named `purchases` stores five years of data, partitioned by day. Each partition has two indexes. The following sequence of events occurs:

1. You query many days worth of data, which requires the database to read many partitions.
2. The database creates a lock entry for each partition. If partition indexes are part of the optimizer access path, the database creates a lock entry for them, too.
3. When the number of requested lock entries for the same backend process exceeds the number of fast-path slots available to that backend, the lock manager uses the non–fast path lock method. In PostgreSQL 17 and earlier, this limit is fixed at 16 (the value of `FP_LOCK_SLOTS_PER_BACKEND`). Beginning with PostgreSQL 18, the number of fast-path slots per backend is no longer fixed. Instead, it scales with the `max_locks_per_transaction` parameter, so a backend can keep many more relation locks on the fast path.

Modern applications might have hundreds of sessions. If concurrent sessions are querying the parent without proper partition pruning, the database might create hundreds or even thousands of non–fast path locks. Typically, when this concurrency is higher than the number of vCPUs, the `LWLock:lock_manager` wait event appears.

> **Note**
>
> The `LWLock:lock_manager` wait event isn't related to the number of partitions or indexes in a database schema. Instead, it's related to the number of non–fast path locks that the database must control.

Likely causes of increased waits

When the `LWLock:lock_manager` wait event occurs more than normal, possibly indicating a performance problem, the most likely causes of sudden spikes are as follows:

- Concurrent active sessions are running queries that don't use fast path locks. These sessions also exceed the maximum vCPU.
- A large number of concurrent active sessions are accessing a heavily partitioned table. Each partition has multiple indexes.
- The database is experiencing a connection storm. By default, some applications and connection pool software create more connections when the database is slow. This practice makes the problem worse. Tune your connection pool software so that connection storms don't occur.
- A large number of sessions query a parent table without pruning partitions.
- A data definition language (DDL), data manipulation language (DML), or a maintenance command exclusively locks either a busy relation or tuples that are frequently accessed or modified.

Actions

We recommend different actions depending on the causes of your wait event.

Topics

- Use partition pruning
- Remove unnecessary indexes
- Tune your queries for fast path locking
- Tune for other wait events
- Reduce hardware bottlenecks
- Use a connection pooler
- Upgrade your Aurora PostgreSQL version

Use partition pruning

Partition pruning is a query optimization strategy that excludes unneeded partitions from table scans, thereby improving performance. Partition pruning is turned on by default. If it is turned off, turn it on as follows.

```
SET enable_partition_pruning = on;
```

Queries can take advantage of partition pruning when their `WHERE` clause contains the column used for the partitioning. For more information, see Partition Pruning in the PostgreSQL documentation.

Remove unnecessary indexes

Your database might contain unused or rarely used indexes. If so, consider deleting them. Do either of the following:

- Learn how to find unnecessary indexes by reading Unused Indexes in the PostgreSQL wiki.
- Run PG Collector. This SQL script gathers database information and presents it in a consolidated HTML report. Check the "Unused indexes" section. For more information, see pg-collector in the Amazon Labs GitHub repository.

Tune your queries for fast path locking

To find out whether your queries use fast path locking, query the `fastpath` column in the `pg_locks` table. In PostgreSQL 17 and earlier, each backend has a fixed set of 16 fast-path slots. If your queries aren't using fast path locking, try to reduce the number of relations per query to fewer than 16. Beginning with PostgreSQL 18, the number of fast-path slots per backend scales with the `max_locks_per_transaction` parameter, so you can increase `max_locks_per_transaction` to let more of a query's relation locks use the fast path. However, raising `max_locks_per_transaction` increases shared memory usage.

Tune for other wait events

If `LWLock:lock_manager` is first or second in the list of top waits, check whether the following wait events also appear in the list:

- `Lock:Relation`
- `Lock:transactionid`
- `Lock:tuple`

If the preceding events appear high in the list, consider tuning these wait events first. These events can be a driver for `LWLock:lock_manager`.

Reduce hardware bottlenecks

You might have a hardware bottleneck, such as CPU starvation or maximum usage of your Amazon EBS bandwidth. In these cases, consider reducing the hardware bottlenecks. Consider the following actions:

- Scale up your instance class.
- Optimize queries that consume large amounts of CPU and memory.
- Change your application logic.
- Archive your data.

For more information about CPU, memory, and EBS network bandwidth, see Amazon RDS Instance Types.

Use a connection pooler

If your total number of active connections exceeds the maximum vCPU, more OS processes require CPU than your instance type can support. In this case, consider using or tuning a connection pool. For more information about the vCPUs for your instance type, see Amazon RDS Instance Types.

For more information about connection pooling, see the following resources:

- Amazon RDS Proxy for Aurora
- pgbouncer
- Connection Pools and Data Sources in the *PostgreSQL Documentation*

Upgrade your Aurora PostgreSQL version

If your current version of Aurora PostgreSQL is lower than 12, upgrade to version 12 or higher. PostgreSQL versions 12 and 13 have an improved partition mechanism. For more information about version 12, see PostgreSQL 12.0 Release Notes. For more information about upgrading Aurora PostgreSQL, see Database engine updates for Amazon Aurora PostgreSQL.

LWLock:MultiXact

The `LWLock:MultiXactMemberBuffer`, `LWLock:MultiXactOffsetBuffer`, `LWLock:MultiXactMemberSLRU`, and `LWLock:MultiXactOffsetSLRU` wait events indicate

that a session is waiting to retrieve a list of transactions that modifies the same row in a given table.

- `LWLock:MultiXactMemberBuffer` – A process is waiting for I/O on a simple least-recently used (SLRU) buffer for a multixact member.
- `LWLock:MultiXactMemberSLRU` – A process is waiting to access the simple least-recently used (SLRU) cache for a multixact member.
- `LWLock:MultiXactOffsetBuffer` – A process is waiting for I/O on a simple least-recently used (SLRU) buffer for a multixact offset.
- `LWLock:MultiXactOffsetSLRU` – A process is waiting to access the simple least-recently used (SLRU) cache for a multixact offset.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

A *multixact* is a data structure that stores a list of transaction IDs (XIDs) that modify the same table row. When a single transaction references a row in a table, the transaction ID is stored in the table header row. When multiple transactions reference the same row in a table, the list of transaction IDs is stored in the multixact data structure. The multixact wait events indicate that a session is retrieving from the data structure the list of transactions that refer to a given row in a table.

Likely causes of increased waits

Three common causes of multixact use are as follows:

- **Sub-transactions from explicit savepoints** – Explicitly creating a savepoint in your transactions spawns new transactions for the same row. For example, using `SELECT FOR UPDATE`, then `SAVEPOINT`, and then `UPDATE`.

Some drivers, object-relational mappers (ORMs), and abstraction layers have configuration options for automatically wrapping all operations with savepoints. This can generate many multixact wait events in some workloads. The PostgreSQL JDBC Driver's `autosave` option is an example of this. For more information, see pgJDBC in the PostgreSQL JDBC documentation. Another example is the PostgreSQL ODBC driver and its `protocol` option. For more information, see psqlODBC Configuration Options in the PostgreSQL ODBC driver documentation.

- **Sub-transactions from PL/pgSQL EXCEPTION clauses** – Each `EXCEPTION` clause that you write in your PL/pgSQL functions or procedures creates a `SAVEPOINT` internally.
- **Foreign keys** – Multiple transactions acquire a shared lock on the parent record.

When a given row is included in a multiple transaction operation, processing the row requires retrieving transaction IDs from the `multixact` listings. If lookups can't get the multixact from the memory cache, the data structure must be read from the Aurora storage layer. This I/O from storage means that SQL queries can take longer. Memory cache misses can start occurring with heavy usage due to a large number of multiple transactions. All these factors contribute to an increase in this wait event.

Actions

We recommend different actions depending on the causes of your wait event. Some of these actions can help in immediate reduction of the wait events. But, others might require investigation and correction to scale your workload.

Topics

- Perform vacuum freeze on tables with this wait event
- Increase autovacuum frequency on tables with this wait event
- Increase memory parameters
- Reduce long-running transactions
- Long term actions

Perform vacuum freeze on tables with this wait event

If this wait event spikes suddenly and affects your production environment, you can use any of the following temporary methods to reduce its count.

- Use *VACUUM FREEZE* on the affected table or table partition to resolve the issue immediately. For more information, see VACUUM.
- Use the VACUUM (FREEZE, INDEX_CLEANUP FALSE) clause to perform a quick vacuum by skipping the indexes. For more information, see Vacuuming a table as quickly as possible.

Increase autovacuum frequency on tables with this wait event

After scanning all tables in all databases, VACUUM will eventually remove multixacts, and their oldest multixact values are advanced. For more information, see Multixacts and Wraparound. To keep the LWLock:MultiXact wait events to its minimum, you must run the VACUUM as often as necessary. To do so, ensure that the VACUUM in your Aurora PostgreSQL DB cluster is configured optimally.

If using VACUUM FREEZE on the affected table or table partition resolves the wait event issue, we recommend using a scheduler, such as `pg_cron`, to perform the VACUUM instead of adjusting autovacuum at the instance level.

For the autovacuum to happen more frequently, you can reduce the value of the storage parameter `autovacuum_multixact_freeze_max_age` in the affected table. For more information, see autovacuum_multixact_freeze_max_age.

Increase memory parameters

You can optimize memory usage for multixact caches by adjusting the following parameters. These settings control how much memory is reserved for these caches, which can help reduce multixact wait events in your workload. We recommend starting with the following values:

For Aurora PostgreSQL 17 and later:

- `multixact_offset_buffers` = 128
- `multixact_member_buffers` = 256

For Aurora PostgreSQL 16 and earlier:

- `multixact_offsets_cache_size` = 128
- `multixact_members_cache_size` = 256

> **Note**
>
> In Aurora PostgreSQL 17, parameter names were changed from `multixact_offsets_cache_size` to `multixact_offset_buffers` and from `multixact_members_cache_size` to `multixact_member_buffers` to align with community PostgreSQL 17.

You can set these parameters at the cluster level so that all instances in your cluster remain consistent. We recommend you to test and adjust the values to best suit your specific workload requirements and instance class. You must reboot the writer instance for the parameter changes to take effect.

The parameters are expressed in terms of multixact cache entries. Each cache entry uses `8 KB` of memory. To calculate the total memory reserved, multiply each parameter value by `8 KB`. For example, if you set a parameter to 128, the total reserved memory would be `128 * 8 KB = 1 MB`.

Reduce long-running transactions

Long-running transaction causes the vacuum to retain its information until the transaction is committed or until the read-only transaction is closed. We recommend that you proactively monitor and manage long-running transactions. For more information, see Database has long running idle in transaction connection. Try to modify your application to avoid or minimize your use of long-running transactions.

Long term actions

Examine your workload to discover the cause for the multixact spillover. You must fix the issue in order to scale your workload and reduce the wait event.

- You must analyze the DDL (data definition language) used to create your tables. Make sure that the table structures and indexes are well designed.
- When the affected tables have foreign keys, determine whether they are needed or if there is another way to enforce referential integrity.
- When a table has large unused indexes, it can cause autovacuum to not fit your workload and might block it from running. To avoid this, check for unused indexes and remove them completely. For more information, see Managing autovacuum with large indexes.

- Reduce the use of savepoints in your transactions.

LWLock:pg_stat_statements

The LWLock:pg_stat_statements wait event occurs when the `pg_stat_statements` extension takes an exclusive lock on the hash table that tracks SQL statements. This happens in the following scenarios:

- When the number of tracked statements reaches the configured `pg_stat_statements.max` parameter value and there is a need to make room for more entries, the extension performs a sort on the number of calls, removes the 5% of the least-executed statements, and re-populates the hash with the remaining entries.
- When `pg_stat_statements` performs a `garbage collection` operation to the `pgss_query_texts.stat` file on disk and rewrites the file.

Topics

- Supported engine versions
- Context
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Context

Understanding the pg_stat_statements extension – The pg_stat_statements extension tracks SQL statement execution statistics in a hash table. The extension tracks SQL statements up to the limit defined by the `pg_stat_statements.max` parameter. This parameter determines the maximum number of statements that can be tracked which corresponds to the maximum number of rows in the pg_stat_statements view.

Statement statistics persistence – The extension persists statement statistics across instance restarts by:

- Writing data to a file named pg_stat_statements.stat
- Using the pg_stat_statements.save parameter to control persistence behavior

When pg_stat_statements.save is set to:

- on (default): Statistics are saved at shutdown and reloaded at server start
- off: Statistics are neither saved at shutdown nor reloaded at server start

Query text storage – The extension stores the text of tracked queries in a file named `pgss_query_texts.stat`. This file can grow to double the average size of all tracked SQL statements before garbage collection occurs. The extension requires an exclusive lock on the hash table during cleanup operations and rewrite `pgss_query_texts.stat` file.

Statement deallocation process – When the number of tracked statements reaches the `pg_stat_statements.max` limit and new statements need to be tracked, the extension:

- Takes an exclusive lock (LWLock:pg_stat_statements) on the hash table.
- Loads existing data into local memory.
- Performs a quicksort based on the number of calls.
- Removes the least-called statements (bottom 5%).
- Re-populates the hash table with the remaining entries.

Monitoring statement deallocation – In PostgreSQL 14 and later, you can monitor statement deallocation using the pg_stat_statements_info view. This view includes a dealloc column that shows how many times statements were deallocated to make room for new ones

If the deallocation of statements occurs frequently, it will lead to more frequent garbage collection of the `pgss_query_texts.stat` file on disk.

Likely causes of increased waits

The typical causes of increased `LWLock:pg_stat_statements` waits include:

- An increase in the number of unique queries used by the application.
- The `pg_stat_statements.max` parameter value being small compared to the number of unique queries being used.

Actions

We recommend different actions depending on the causes of your wait event. You might identify `LWLock:pg_stat_statements` events by using Amazon RDS Performance Insights or by querying the view `pg_stat_activity`.

Adjust the following `pg_stat_statements` parameters to control tracking behavior and reduce LWLock:pg_stat_ statements wait events.

Topics

- Disable pg_stat_statements.track parameter
- Increase pg_stat_statements.max parameter
- Disable pg_stat_statements.track_utility parameter

Disable pg_stat_statements.track parameter

If the LWLock:pg_stat_statements wait event is adversely impacting database performance, and a rapid solution is required before further analysis of the `pg_stat_statements` view to identify the root cause, the `pg_stat_statements.track` parameter can be disabled by setting it to none. This will disable the collection of statement statistics.

Increase pg_stat_statements.max parameter

To reduce deallocation and minimize garbage collection of the `pgss_query_texts.stat` file on disk, increase the value of the `pg_stat_statements.max` parameter. The default value is `5,000`.

> **Note**
>
> The `pg_stat_statements.max` parameter is static. You must restart your DB instance to apply any changes to this parameter.

Disable pg_stat_statements.track_utility parameter

You can analyze the pg_stat_statements view to determine which utility commands are consuming the most resources tracked by `pg_stat_statements`.

The pg_stat_statements.track_utility parameter controls whether the module tracks utility commands, which include all commands except SELECT, INSERT, UPDATE, DELETE, and MERGE. By default, this parameter is set to on.

For example, when your application uses many savepoint queries, which are inherently unique, it can increase statement deallocation. To address this, you can disable the pg_stat_statements.track_utility parameter to stop pg_stat_statements from tracking savepoint queries.

> **Note**
>
> The pg_stat_statements.track_utility parameter is a dynamic parameter. You can change its value without restarting your database instance.

Example of unique save point queries in pg_stat_statements

```
                    query                         |       queryid
--------------------------------------------------+---------------------
 SAVEPOINT JDBC_SAVEPOINT_495701                  | -7249565344517699703
 SAVEPOINT JDBC_SAVEPOINT_1320                    | -1572997038849006629
 SAVEPOINT JDBC_SAVEPOINT_26739                   |  54791337410474486
 SAVEPOINT JDBC_SAVEPOINT_1294466                 |  8170064357463507593
 ROLLBACK TO SAVEPOINT JDBC_SAVEPOINT_65016       | -33608214779996400
 SAVEPOINT JDBC_SAVEPOINT_14185                   | -2175035613806809562
 SAVEPOINT JDBC_SAVEPOINT_45837                   | -6201592986750645383
 SAVEPOINT JDBC_SAVEPOINT_1324                    |  6388797791882029332
```

PostgreSQL 17 introduces several enhancements for utility command tracking:

- Savepoint names are now displayed as constants.
- Global Transaction IDs (GIDs) of two-phase commit commands are now displayed as constants.
- Names of DEALLOCATE statements are shown as constants.
- CALL parameters are now displayed as constants.

Timeout:PgSleep

The `Timeout:PgSleep` event occurs when a server process has called the `pg_sleep` function and is waiting for the sleep timeout to expire.

Topics

- Supported engine versions
- Likely causes of increased waits
- Actions

Supported engine versions

This wait event information is supported for all versions of Aurora PostgreSQL.

Likely causes of increased waits

This wait event occurs when an application, stored function, or user issues a SQL statement that calls one of the following functions:

- `pg_sleep`
- `pg_sleep_for`
- `pg_sleep_until`

The preceding functions delay execution until the specified number of seconds have elapsed. For example, `SELECT pg_sleep(1)` pauses for 1 second. For more information, see Delaying Execution in the PostgreSQL documentation.

Actions

Identify the statement that was running the `pg_sleep` function. Determine if the use of the function is appropriate.

Tuning Aurora PostgreSQL with Amazon DevOps Guru proactive insights

DevOps Guru proactive insights detects conditions on your Aurora PostgreSQL DB clusters that can cause problems, and lets you know about them before they occur. Proactive insights can alert

you to a long running idle in transaction connection. For more information about troubleshooting long running idle in transaction connections, see Database has long running idle in transaction connection

DevOps Guru can do the following:

- Prevent many common database issues by cross-checking your database configuration against common recommended settings.
- Alert you to critical issues in your fleet that, if left unchecked, can lead to larger problems later.
- Alert you to newly discovered problems.

Every proactive insight contains an analysis of the cause of the problem and recommendations for corrective actions.

For more information about Amazon DevOps Guru for Amazon RDS, see Analyzing Aurora performance anomalies with Amazon DevOps Guru for Amazon RDS.

Database has long running idle in transaction connection

A connection to the database has been in the `idle in transaction` state for more than 1800 seconds.

Topics

- Supported engine versions
- Context
- Likely causes for this issue
- Actions
- Relevant metrics

Supported engine versions

This insight information is supported for all versions of Aurora PostgreSQL.

Context

A transaction in the `idle in transaction` state can hold locks that block other queries. It can also prevent `VACUUM` (including autovacuum) from cleaning up dead rows, leading to index or table bloat or transaction ID wraparound.

Likely causes for this issue

A transaction initiated in an interactive session with BEGIN or START TRANSACTION hasn't ended by using a COMMIT, ROLLBACK, or END command. This causes the transaction to move to `idle in transaction` state.

Actions

You can find idle transactions by querying `pg_stat_activity`.

In your SQL client, run the following query to list all connections in `idle in transaction` state and to order them by duration:

```
SELECT now() - state_change as idle_in_transaction_duration, now() - xact_start as
 xact_duration,*
FROM  pg_stat_activity
WHERE state  = 'idle in transaction'
AND   xact_start is not null
ORDER BY 1 DESC;
```

We recommend different actions depending on the causes of your insight.

Topics

- End transaction
- Terminate the connection
- Configure the idle_in_transaction_session_timeout parameter
- Check the AUTOCOMMIT status
- Check the transaction logic in your application code

End transaction

When you initiate a transaction in an interactive session with BEGIN or START TRANSACTION, it moves to `idle in transaction` state. It remains in this state until you end the transaction by issuing a COMMIT, ROLLBACK, END command or disconnect the connection completely to roll back the transaction.

Terminate the connection

Terminate the connection with an idle transaction using the following query:

```
SELECT pg_terminate_backend(pid);
```

pid is the process ID of the connection.

Configure the idle_in_transaction_session_timeout parameter

Configure the `idle_in_transaction_session_timeout` parameter in the parameter group. The advantage of configuring this parameter is that it does not require a manual intervention to terminate the long idle in transaction. For more information on this parameter, see the PostgreSQL documentation.

The following message will be reported in the PostgreSQL log file after the connection is terminated, when a transaction is in the idle_in_transaction state for longer than the specified time.

```
FATAL: terminating connection due to idle in transaction timeout
```


Check the AUTOCOMMIT status

AUTOCOMMIT is turned on by default. But if it is accidentally turned off in the client ensure that you turn it back on.

- In your psql client, run the following command:

  ```
  postgres=> \set AUTOCOMMIT on
  ```

- In pgadmin, turn it on by choosing the AUTOCOMMIT option from the down arrow.

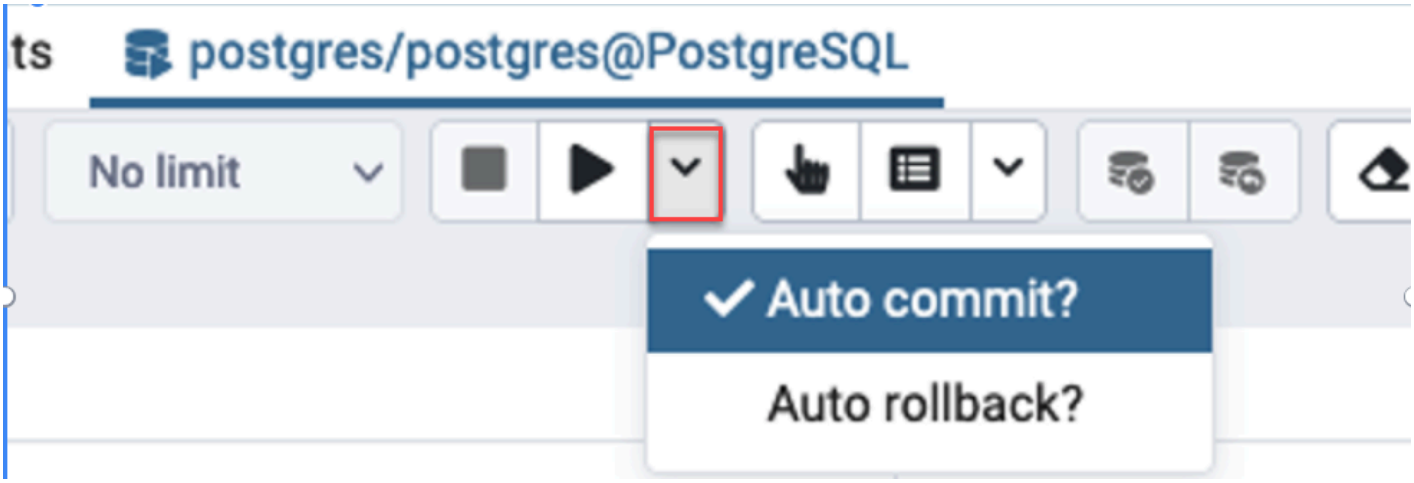

Check the transaction logic in your application code

Investigate your application logic for possible problems. Consider the following actions:

- Check if the JDBC auto commit is set true in your application. Also, consider using explicit `COMMIT` commands in your code.
- Check your error handling logic to see whether it closes a transaction after errors.
- Check whether your application is taking long to process the rows returned by a query while the transaction is open. If so, consider coding the application to close the transaction before processing the rows.
- Check whether a transaction contains many long-running operations. If so, divide a single transaction into multiple transactions.

Relevant metrics

The following PI metrics are related to this insight:

- idle_in_transaction_count - Number of sessions in `idle in transaction` state.
- idle_in_transaction_max_time - The duration of the longest running transaction in the `idle in transaction` state.

Best practices with Amazon Aurora PostgreSQL

Following, you can find several best practices for managing your Amazon Aurora PostgreSQL DB cluster. Be sure to also review basic maintenance tasks. For more information, see Performance and scaling for Amazon Aurora PostgreSQL.

For information about managing databases with a high number of objects, see Managing high object counts in Amazon Aurora PostgreSQL.

For initial troubleshooting steps for Aurora PostgreSQL performance, see Initial troubleshooting for common PostgreSQL performance issues in Aurora PostgreSQL.

Topics

- Avoiding slow performance, automatic restart, and failover for Aurora PostgreSQL DB instances
- Diagnosing table and index bloat
- Managing high object counts in Amazon Aurora PostgreSQL

- Improved memory management in Aurora PostgreSQL
- Fast failover with Amazon Aurora PostgreSQL
- Fast recovery after failover with cluster cache management for Aurora PostgreSQL
- Managing Aurora PostgreSQL connection churn with pooling
- Dead connection handling in PostgreSQL
- Tuning memory parameters for Aurora PostgreSQL
- Using Amazon CloudWatch metrics to analyze resource usage for Aurora PostgreSQL
- Using logical replication to perform a major version upgrade for Aurora PostgreSQL
- Managing custom casts in Aurora PostgreSQL
- Best Practices for Parallel Queries in Aurora PostgreSQL
- Avoiding performance issues with REPLICA IDENTITY FULL in Aurora PostgreSQL
- Initial troubleshooting for common PostgreSQL performance issues in Aurora PostgreSQL
- Troubleshooting storage issues in Aurora PostgreSQL

Avoiding slow performance, automatic restart, and failover for Aurora PostgreSQL DB instances

If you're running a heavy workload or workloads that spike beyond the allocated resources of your DB instance, you can exhaust the resources on which you're running your application and Aurora database. To get metrics on your database instance such as CPU utilization, memory usage, and number of database connections used, you can refer to the metrics provided by Amazon CloudWatch, Performance Insights, and Enhanced Monitoring. For more information on monitoring your DB instance, see Monitoring metrics in an Amazon Aurora cluster.

If your workload exhausts the resources you're using, your DB instance might slow down, restart, or even fail over to another DB instance. To avoid this, monitor your resource utilization, examine the workload running on your DB instance, and make optimizations where necessary. If optimizations don't improve the instance metrics and mitigate the resource exhaustion, consider scaling up your DB instance before you reach its limits. For more information on available DB instance classes and their specifications, see Amazon AuroraDB instance classes.

Diagnosing table and index bloat

You can use PostgreSQL Multiversion Concurrency Control (MVCC) to help preserve data integrity. PostgreSQL MVCC works by saving an internal copy of updated or deleted rows (also called *tuples*)

until a transaction is either committed or rolled back. This saved internal copy is invisible to users. However, table bloat can occur when those invisible copies aren't cleaned up regularly by the VACUUM or AUTOVACUUM utilities. Unchecked, table bloat can incur increased storage costs and slow your processing speed.

In many cases, the default settings for VACUUM or AUTOVACUUM on Aurora are sufficient for handling unwanted table bloat. However, you may want to check for bloat if your application is experiencing the following conditions:

- Processes a large number of transactions in a relatively short time between VACUUM processes.
- Performs poorly and runs out of storage.

To get started, gather the most accurate information about how much space is used by dead tuples and how much you can recover by cleaning up the table and index bloat. To do so, use the `pgstattuple` extension to gather statistics on your Aurora cluster. For more information, see pgstattuple. Privileges to use the `pgstattuple` extension are limited to the `pg_stat_scan_tables` role and database superusers.

Performance impact of pgstattuple on large tables

The `pgstattuple` function performs a full-table scan to return an exact count of live and dead tuples, their sizes, and free space. On a large table, this scan can run for a long time and add significant input/output (I/O) load to a production database. For large tables, use `pgstattuple_approx` instead.

With `pgstattuple_approx`, you can avoid most of the full-table scan. Pages that the visibility map marks as all-visible are skipped. You get exact dead-tuple statistics along with an approximation of the number and size of live tuples and free space. `pgstattuple_approx` is supported only for tables. To gather statistics on an index, use `pgstattuple` or `pgstatindex`.

To create the `pgstattuple` extension on Aurora, connect a client session to the cluster, for example, psql or pgAdmin, and use the following command:

```
CREATE EXTENSION pgstattuple;
```

Create the extension in each database that you want to profile. After creating the extension, use the command line interface (CLI) to measure how much unusable space you can reclaim. Before gathering statistics, modify the cluster parameter group by setting AUTOVACUUM to 0. A setting of 0 prevents Aurora from automatically cleaning up any dead tuples left behind by your application, which can impact the accuracy of the results. Enter the following command to create a simple table:

```
postgres=> CREATE TABLE lab AS SELECT generate_series (0,100000);
SELECT 100001
```

In the following example, we run the query with AUTOVACUUM turned on for the DB cluster. The `dead_tuple_count` is 0, which indicates that the AUTOVACUUM has deleted the obsolete data or tuples from the PostgreSQL database.

To use `pgstattuple` to gather information about the table, specify the name of a table or an object identifier (OID) in the query:

```
postgres=> SELECT * FROM pgstattuple('lab');
```

```
table_len  | tuple_count | tuple_len | tuple_percent | dead_tuple_count |
 dead_tuple_len | dead_tuple_percent | free_space | free_percent
-----------+-------------+-----------+---------------+------------------
+----------------+--------------------+------------+--------------
3629056    | 100001      | 2800028   | 77.16         | 0                | 0
  | 0                  | 16616      | 0.46
(1 row)
```

In the following query, we turn off AUTOVACUUM and enter a command that deletes 25,000 rows from the table. As a result, the `dead_tuple_count` increases to 25000.

```
postgres=> DELETE FROM lab WHERE generate_series < 25000;

DELETE 25000
```

```
SELECT * FROM pgstattuple('lab');
```

```
table_len | tuple_count | tuple_len | tuple_percent | dead_tuple_count | dead_tuple_len
 | dead_tuple_percent | free_space | free_percent
-----------+-------------+-----------+---------------+------------------
+----------------+--------------------+------------+--------------
3629056 | 75001 | 2100028 | 57.87 | 25000 | 700000 | 19.29 | 16616 | 0.46
(1 row)
```

To reclaim those dead tuples, start a VACUUM process.

Observing bloat without interrupting your application

Settings on an Aurora cluster are optimized to provide the best practices for most workloads. However, you might want to optimize a cluster to better suit your applications and use patterns. In this case, you can use the `pgstattuple` extension without disrupting a busy application. To do so, perform the following steps:

1. Clone your Aurora instance.
2. Modify the parameter file to turn off AUTOVACUUM in the clone.
3. Perform a `pgstattuple` query while testing the clone with a sample workload or with pgbench, which is a program for running benchmark tests on PostgreSQL. For more information, see pgbench.

After running your applications and viewing the result, use pg_repack or VACUUM FULL on the restored copy and compare the differences. If you see a significant drop in the dead_tuple_count, dead_tuple_len, or dead_tuple_percent, then adjust the vacuum schedule on your production cluster to minimize the bloat.

Avoiding bloat in temporary tables

If your application creates temporary tables, make sure that your application removes those temporary tables when they're no longer needed. Autovacuum processes don't locate temporary

tables. Left unchecked, temporary tables can quickly create database bloat. Moreover, the bloat can extend into the system tables, which are the internal tables that track PostgreSQL objects and attributes, like pg_attribute and pg_depend.

When a temporary table is no longer needed, you can use a TRUNCATE statement to empty the table and free up the space. Then, manually vacuum the pg_attribute and pg_depend tables. Vacuuming these tables ensures that creating and truncating/deleting temporary tables continually isn't adding tuples and contributing to system bloat.

You can avoid this problem while creating a temporary table by including the following syntax that deletes the new rows when content is committed:

```
CREATE TEMP TABLE IF NOT EXISTS table_name(table_description) ON COMMIT DELETE ROWS;
```

The `ON COMMIT DELETE ROWS` clause truncates the temporary table when the transaction is committed.

Avoiding bloat in indexes

When you change an indexed field in a table, the index update results in one or more dead tuples in that index. By default, the autovacuum process cleans up bloat in indexes, but that cleanup uses a significant amount of time and resources. To specify index cleanup preferences when you create a table, include the vacuum_index_cleanup clause. By default, at table creation time, the clause is set to AUTO, which means that the server decides if your index requires cleanup when it vacuums the table. You can set the clause to ON to turn on index cleanup for a specific table, or OFF to turn off index cleanup for that table. Remember, turning off index cleanup might save time, but can potentially lead to a bloated index.

You can manually control index cleanup when you VACUUM a table at the command line. To vacuum a table and remove dead tuples from the indexes, include the INDEX_CLEANUP clause with a value of ON and the table name:

```
acctg=> VACUUM (INDEX_CLEANUP ON) receivables;

INFO: aggressively vacuuming "public.receivables"
VACUUM
```

To vacuum a table without cleaning the indexes, specify a value of OFF:

```
acctg=> VACUUM (INDEX_CLEANUP OFF) receivables;

INFO: aggressively vacuuming "public.receivables"
VACUUM
```

Managing high object counts in Amazon Aurora PostgreSQL

While PostgreSQL limitations are theoretical, having extremely high object counts in a database will cause noticeable performance impact to various operations. This documentation covers several common object types that, when having a high total count can lead to several possible impacts.

The following table provides a summary of object types and their potential impacts:

Object types and potential impacts

Type of Object	Autovacuum	Logical Replication	Major Version Upgrade	pg_dump / pg_restore	General Performance	Instance Restart
Relations	x		x	x	x	
Temporary tables	x				x	
Unlogged tables		x				x
Partitions					x	
Temporary files					x	
Sequences		x				
Large objects		x	x			

Relations

There is not a specific hard limit regarding the number of tables in a PostgreSQL database. The theoretical limit is extremely high, but there are other practical limits that need to be kept in mind during database design.

Impact: Autovacuum falling behind

Autovacuum can struggle to keep up with transaction ID growth or table bloat due to lack of workers compared to amount of work.

Recommended action: There are several factors for tuning autovacuum to keep up properly with a given number of tables and given workload. See Best practices for working with PostgreSQL autovacuum for suggestions on how to determine appropriate autovacuum settings. Use the postgres_get_av_diag utility to monitor problems with transaction ID growth.

Impact: Major version upgrade / pg_dump and restore

Amazon RDS uses the "--link" option during pg_upgrade execution to avoid having to make copies of datafiles, the schema metadata is still required to be restored into the new version of the database. Even with parallel pg_restore, if there are a significant number of relations this will increase the amount of downtime.

Impact: General performance degradation

General performance degradation due to catalog size. Each table and its associated columns will add to `pg_attribute`, `pg_class` and `pg_depend` tables which are frequently used in normal database operations. There won't be a specific wait event visible, but shared buffer efficiency will be impacted.

Recommended action: Regularly check table bloat for these specific tables and occasionally perform a `VACUUM FULL` on these specific tables. Be aware that `VACUUM FULL` on catalog tables requires an `ACCESS EXCLUSIVE` lock which means no other queries will be able to access them until the operation completes.

Approximate threshold: Millions

Temporary tables

Using temporary tables is useful for test data or intermediate results and is a common pattern seen in many database engines. The implications of heavy use in PostgreSQL must be understood to avoid some of the pitfalls. Each temporary table create and drop will add rows to system catalog tables, which when they become bloated, will cause general performance issues.

Impact: Autovacuum falling behind

Temporary tables aren't vacuumed by autovacuum but will hold on to transaction IDs during their existence and can lead to wraparound if not removed.

Recommended action: Temporary tables will live for the duration of the session that created them or can be dropped manually. A best practice of avoiding long-running transactions with temporary tables will prevent these tables from contributing to maximum used transaction ID growth.

Impact: General performance degradation

General performance degradation due to catalog size. When sessions continuously create and drop temporary tables, it will add to `pg_attribute`, `pg_class` and `pg_depend` tables which are frequently used in normal database operations. There won't be a specific wait event visible, but shared buffer efficiency will be impacted.

Recommended action:

- Regularly check table bloat for these specific tables and occasionally perform a `VACUUM FULL` on these specific tables. Be aware that `VACUUM FULL` on catalog tables requires an `ACCESS EXCLUSIVE` lock which means no other queries will be able to access them until the operation completes.
- If temporary tables are heavily used, prior to a major version upgrade, a `VACUUM FULL` of these specific catalog tables is highly recommended to reduce downtime.

General best practices:

- Reduce the use of temporary tables by using common table expressions to produce intermediate results. These can sometimes complicate the queries needed, but will eliminate the impacts listed above.
- Reuse temporary tables by using the `TRUNCATE` command to clear the contents instead of doing drop/create steps. This will also eliminate the problem of transaction ID growth caused by temporary tables.

Approximate threshold: Tens of thousands

Unlogged tables

Unlogged tables can offer performance gains as they won't generate any WAL information. They must be used carefully as they offer no durability during database crash recovery as they will be truncated. This is an expensive operation in PostgreSQL as each unlogged table is truncated serially. While this operation is fast for a low number of unlogged tables, when they number in the thousands it can start to add notable delay during startup.

Impact: Logical replication

Unlogged tables are generally not included in logical replication, including Blue/Green Deployments, because logical replication relies on the WAL to capture and transfer changes. Read more on how to configure Aurora PostgreSQL to replicate unlogged tables.

Impact: Reader Nodes

You can access unlogged tables only from the writer node in the Aurora DB cluster. See Working with unlogged tables in Aurora PostgreSQL for full details.

General best practices:

- Unlogged tables provide limited performance benefits in Aurora PostgreSQL compared to standard PostgreSQL, so evaluate whether normal tables are more appropriate.

Approximate threshold: Thousands

Partitions

Partitioning can increase query performance and provide a logical organization of data. In ideal scenarios, partitioning is organized so that partition pruning can be used during query planning and execution. Using too many partitions can have negative impacts on query performance and database maintenance. The choice of how to partition a table should be made carefully, as the performance of query planning and execution can be negatively affected by poor design. See PostgreSQL documentation for details about partitioning.

Impact: General performance degradation

Sometimes planning time overhead will increase and explain plans for your queries will become more complicated, making it difficult to identify tuning opportunities. For PostgreSQL versions earlier than 18, many partitions with high workload can lead to `LWLock:LockManager` waits.

Recommended action: Determine a minimum number of partitions that will allow you to complete both the organization of your data while at the same time providing performant query execution.

Impact: Maintenance complexity

Very high number of partitions will introduce maintenance difficulties like pre-creation and removal. Autovacuum will treat partitions as normal relations and have to perform regular cleanup, therefore requiring enough workers to complete the task.

Recommended action:

- Ensure you precreate partitions so that workload isn't blocked when a new partition is needed (for example, monthly based partitions) and old partitions are rolled off.
- Ensure you have enough autovacuum workers to perform normal cleanup maintenance of all partitions.

Approximate threshold: Hundreds

Temporary files

Different than temporary tables mentioned above, temporary files are created by PostgreSQL when a complex query might perform several sort or hash operations at the same time, with each operation using instance memory to store results up to the value specified in the `work_mem` parameter. When the instance memory is not sufficient, temporary files are created to store the results. See Managing temporary files for more details on temporary files. If your workload generates high numbers of these files, there can be several impacts.

Impact: FreeLocalStorage consumption

Temporary files are a necessary part of PostgreSQL when query results are unable to fit in work_mem. Generally this is fine. However, when the workload uses this extensively, that indicates large queries are continually running and you will observe a decrease in FreeLocalStorage. See Managing temporary files for more details.

General best practices:

- Monitor your temp file usage with Performance Insights.
- Tune queries that are generating significant temporary files to see if it's possible to reduce the total number of temp files.

Approximate threshold: Thousands

Sequences

Sequences are the underlying object used for auto-incrementing columns in PostgreSQL and they provide uniqueness and a key for the data. These can be used on individual tables with no consequence during normal operations with one exception of logical replication.

In PostgreSQL, logical replication does not currently replicate a sequence's current value to any subscriber. To learn more, see the Restrictions page in PostgreSQL documentation.

Impact: Extended switchover time

If you plan to use Blue/Green Deployments for any type of configuration change or upgrade, it is important to understand the impact of a high number of sequences on switchover. One of the last phases of a switchover will synchronize the current value of sequences, and if there are several thousand, this will increase the overall switchover time.

Recommended action: If your database workload would allow for the use of a shared UUID instead of a sequence-per-table approach, this would cut down on the synchronization step during a switchover.

Approximate threshold: Thousands

Large objects

Large objects are stored in a single system table named pg_largeobject. Each large object also has an entry in the system table pg_largeobject_metadata. These objects are created, modified and cleaned up much differently than standard relations. Large objects are not handled by autovacuum and must be periodically cleaned up via a separate process called vacuumlo. See managing large objects with the lo module for examples on managing large objects.

Impact: Logical replication

Large objects are not currently replicated in PostgreSQL during logical replication. To learn more, see the Restrictions page in PostgreSQL documentation. In a Blue/Green configuration, this means large objects in the blue environment aren't replicated to the green environment.

Impact: Major version upgrade

An upgrade can run out of memory and fail if there are millions of large objects and the instance cannot handle them during an upgrade. The PostgreSQL major version upgrade

process comprises of two broad phases: dumping the schema via pg_dump and restoring it through pg_restore. If your database has millions of large objects you need to ensure your instance has sufficient memory to handle the pg_dump and pg_restore during an upgrade and scale it to a larger instance type.

General best practices:

- Regularly use the vacuumlo utility to remove any orphaned large objects you may have.
- Consider using the BYTEA datatype for storing your large objects in the database.

Approximate threshold: Millions

Approximate thresholds

The approximate thresholds mentioned in this topic are only used to provide an estimate of how far a particular resource can scale. They represent the general range where the described impacts become more likely, but actual behavior depends on your specific workload, instance size, and configuration. While it may be possible to exceed these estimates, care and maintenance must be adhered to so as to avoid the impacts listed.

Improved memory management in Aurora PostgreSQL

Aurora PostgreSQL now includes advanced memory management capabilities to optimize database performance and resilience under varying workloads. These improvements help Aurora PostgreSQL maintain consistent availability and responsiveness, even during periods of high memory demand.

This feature is available and enabled by default in the following Aurora PostgreSQL versions for provisioned instances:

- 15.3 and all higher minor versions
- 14.8 and higher minor versions
- 13.11 and higher minor versions
- 12.15 and higher minor versions
- 11.20 and higher minor versions

This feature is available and enabled by default in the following Aurora PostgreSQL for Aurora Serverless instances:

- 16.3 and all higher minor versions
- 15.7 and all higher minor versions
- 14.12 and higher minor versions
- 13.15 and higher minor versions

When customer workloads use up all available free memory, the operating system may restart the database to protect resources, leading to temporary unavailability. The new memory management improvements in Aurora PostgreSQL proactively cancel certain transactions when the system experiences high memory pressure, helping to maintain database stability.

The key features of improved memory management is as follows:

- Cancelling database transactions that request more memory when the system is approaching critical memory pressure.
- The system is said to be under critical memory pressure, when it exhausts all the physical memory and is about to exhaust the swap. In these circumstances, any transaction that requests memory will be cancelled in an effort to immediately reduce memory pressure in the DB instance.
- Essential PostgreSQL launchers and background workers such as autovacuum workers are always protected.

Handling memory management parameters

To turn on memory management

This feature is turned on by default. An error message is displayed when a transaction is cancelled due to insufficient memory as shown in the following example:

```
ERROR: out of memory Detail: Failed on request of size 16777216.
```

To turn off memory management

To turn off this feature, connect to the Aurora PostgreSQL DB cluster with psql and use the SET statement for the parameter values as mentioned below.

Note

We recommend that you keep memory management enabled. This helps prevent potential out-of-memory errors that may lead to workload-induced database restarts due to memory exhaustion.

The following table shows how to turn off the memory management feature for the different Aurora PostgreSQL versions:

Aurora PostgreSQL versions	Parameter	Default	Command to turn off memory management at session level
11.20, 11.21, 12.15, 12.16, 13.11, 13.12, 14.8, 14.9, 15.3, 15.4	`rds.memory_allocation_guard`	`false`	`SET rds.memory_allocation_guard = true;`
12.17, 13.13, 14.10, 15.5, and higher versions	`rds.enable_memory_management`	`true`	`SET rds.enable_memory_management = false;`

Note

The `rds.memory_allocation_guard` parameter has been deprecated in Aurora PostgreSQL 12.17, 13.13, 14.10, 15.5, and higher versions.

Setting the values of these parameters in the DB cluster parameter group prevents the queries from being canceled. For more information about DB cluster parameter group, see Parameter groups for Amazon Aurora.

Limitation

- This feature is not supported in db.t3.medium instance class.

Fast failover with Amazon Aurora PostgreSQL

Following, you can learn how to make sure that failover occurs as fast as possible. To recover quickly after failover, you can use cluster cache management for your Aurora PostgreSQL DB cluster. For more information, see Fast recovery after failover with cluster cache management for Aurora PostgreSQL.

Some of the steps that you can take to make failover perform fast include the following:

- Set Transmission Control Protocol (TCP) keepalives with short time frames, to stop longer running queries before the read timeout expires if there's a failure.
- Set timeouts for Java Domain Name System (DNS) caching aggressively. Doing this helps ensure the Aurora read-only endpoint can properly cycle through read-only nodes on later connection attempts.
- Set the timeout variables used in the JDBC connection string as low as possible. Use separate connection objects for short- and long-running queries.
- Use the read and write Aurora endpoints that are provided to connect to the cluster.
- Use RDS API operations to test application response on server-side failures. Also, use a packet dropping tool to test application response for client-side failures.
- Use the Amazon JDBC Driver to take full advantage of the failover capabilities of Aurora PostgreSQL. For more information about the Amazon JDBC Driver and complete instructions for using it, see the Amazon Web Services (Amazon) JDBC Driver GitHub repository.

These are covered in more detail following.

Topics

- Setting TCP keepalives parameters
- Configuring your application for fast failover
- Testing failover
- Fast failover example in Java

Setting TCP keepalives parameters

When you set up a TCP connection, a set of timers is associated with the connection. When the keepalive timer reaches zero, a keepalive probe packet is sent to the connection endpoint. If the probe receives a reply, you can assume that the connection is still up and running.

Turning on TCP keepalive parameters and setting them aggressively ensures that if your client can't connect to the database, any active connections are quickly closed. The application can then connect to a new endpoint.

Make sure to set the following TCP keepalive parameters:

- `tcp_keepalives_idle` controls the time, in seconds, after which a keepalive packet is sent when no data has been sent by the socket. ACKs aren't considered data. We recommend the following setting:

  ```
  tcp_keepalives_idle = 1
  ```

- `tcp_keepalives_interval` controls the time, in seconds, between sending subsequent keepalive packets after the initial packet is sent. Set this time by using the `tcp_keepalives_idle` parameter. We recommend the following setting:

  ```
  tcp_keepalives_interval = 1
  ```

- `tcp_keepalives_count` is the number of unacknowledged keepalive probes that occur before the application is notified. We recommend the following setting:

  ```
  tcp_keepalives_count = 5
  ```

These settings should notify the application within five seconds when the database stops responding. If keepalive packets are often dropped within the application's network, you can set a higher `tcp_keepalives_count` value. Doing this allows for more buffer in less reliable networks, although it increases the time that it takes to detect an actual failure.

To set TCP keepalive parameters on Linux

1. Test how to configure your TCP keepalive parameters.

   We recommend doing so by using the command line with the following commands. This suggested configuration is system-wide. In other words, it also affects all other applications that create sockets with the `SO_KEEPALIVE` option on.

```
sudo sysctl net.ipv4.tcp_keepalive_time=1
sudo sysctl net.ipv4.tcp_keepalive_intvl=1
sudo sysctl net.ipv4.tcp_keepalive_probes=5
```

2. After you've found a configuration that works for your application, persist these settings by adding the following lines to `/etc/sysctl.conf`, including any changes you made:

```
tcp_keepalive_time = 1
tcp_keepalive_intvl = 1
tcp_keepalive_probes = 5
```

Configuring your application for fast failover

Following, you can find a discussion of several configuration changes for Aurora PostgreSQL that you can make for fast failover. To learn more about PostgreSQL JDBC driver setup and configuration, see the PostgreSQL JDBC Driver documentation.

Topics

- Reducing DNS cache timeouts
- Setting an Aurora PostgreSQL connection string for fast failover
- Other options for obtaining the host string

Reducing DNS cache timeouts

When your application tries to establish a connection after a failover, the new Aurora PostgreSQL writer will be a previous reader. You can find it by using the Aurora read-only endpoint before DNS updates have fully propagated. Setting the java DNS time to live (TTL) to a low value, such as under 30 seconds, helps cycle between reader nodes on later connection attempts.

```
// Sets internal TTL to match the Aurora RO Endpoint TTL
java.security.Security.setProperty("networkaddress.cache.ttl" , "1");
// If the lookup fails, default to something like small to retry
java.security.Security.setProperty("networkaddress.cache.negative.ttl" , "3");
```

Setting an Aurora PostgreSQL connection string for fast failover

To use Aurora PostgreSQL fast failover, make sure that your application's connection string has a list of hosts instead of just a single host. Following is an example connection string that you can use to connect to an Aurora PostgreSQL cluster. In this example, the hosts are in bold.

```
jdbc:postgresql://myauroracluster.cluster-c9bfei4hjlrd.us-east-1-
beta.rds.amazonaws.com:5432,
myauroracluster.cluster-ro-c9bfei4hjlrd.us-east-1-beta.rds.amazonaws.com:5432
/postgres?user=<primaryuser>&password=<primarypw>&loginTimeout=2
&connectTimeout=2&cancelSignalTimeout=2&socketTimeout=60
&tcpKeepAlive=true&targetServerType=primary
```

For best availability and to avoid a dependency on the RDS API, we recommend that you maintain a file to connect with. This file contains a host string that your application reads from when you establish a connection to the database. This host string has all the Aurora endpoints available for the cluster. For more information about Aurora endpoints, see Amazon Aurora endpoint connections.

For example, you might store your endpoints in a local file as shown following.

```
myauroracluster.cluster-c9bfei4hjlrd.us-east-1-beta.rds.amazonaws.com:5432,
myauroracluster.cluster-ro-c9bfei4hjlrd.us-east-1-beta.rds.amazonaws.com:5432
```

Your application reads from this file to populate the host section of the JDBC connection string. Renaming the DB cluster causes these endpoints to change. Make sure that your application handles this event if it occurs.

Another option is to use a list of DB instance nodes, as follows.

```
my-node1.cksc6xlmwcyw.us-east-1-beta.rds.amazonaws.com:5432,
my-node2.cksc6xlmwcyw.us-east-1-beta.rds.amazonaws.com:5432,
my-node3.cksc6xlmwcyw.us-east-1-beta.rds.amazonaws.com:5432,
my-node4.cksc6xlmwcyw.us-east-1-beta.rds.amazonaws.com:5432
```

The benefit of this approach is that the PostgreSQL JDBC connection driver loops through all nodes on this list to find a valid connection. In contrast, when you use the Aurora endpoints only two nodes are tried in each connection attempt. However, there's a downside to using DB instance nodes. If you add or remove nodes from your cluster and the list of instance endpoints becomes stale, the connection driver might never find the correct host to connect to.

To help ensure that your application doesn't wait too long to connect to any one host, set the following parameters aggressively:

- `targetServerType` – Controls whether the driver connects to a write or read node. To ensure that your applications reconnect only to a write node, set the `targetServerType` value to `primary`.

  Values for the `targetServerType` parameter include `primary`, `secondary`, `any`, and `preferSecondary`. The `preferSecondary` value attempts to establish a connection to a reader first. It connects to the writer if no reader connection can be established.
- `loginTimeout` – Controls how long your application waits to log in to the database after a socket connection has been established.
- `connectTimeout` – Controls how long the socket waits to establish a connection to the database.

You can modify other application parameters to speed up the connection process, depending on how aggressive you want your application to be:

- `cancelSignalTimeout` – In some applications, you might want to send a "best effort" cancel signal on a query that has timed out. If this cancel signal is in your failover path, consider setting it aggressively to avoid sending this signal to a dead host.
- `socketTimeout` – This parameter controls how long the socket waits for read operations. This parameter can be used as a global "query timeout" to ensure no query waits longer than this value. A good practice is to have two connection handlers. One connection handler runs short-lived queries and sets this value lower. Another connection handler, for long-running queries, has this value set much higher. With this approach, you can rely on TCP keepalive parameters to stop long-running queries if the server goes down.
- `tcpKeepAlive` – Turn on this parameter to ensure the TCP keepalive parameters that you set are respected.
- `loadBalanceHosts` – When set to `true`, this parameter has the application connect to a random host chosen from a list of candidate hosts.

Other options for obtaining the host string

You can get the host string from several sources, including the `aurora_replica_status` function and by using the Amazon RDS API.

In many cases, you need to determine who the writer of the cluster is or to find other reader nodes in the cluster. To do this, your application can connect to any DB instance in the DB cluster and query the `aurora_replica_status` function. You can use this function to reduce the amount of time it takes to find a host to connect to. However, in certain network failure scenarios the `aurora_replica_status` function might show out-of-date or incomplete information.

A good way to ensure that your application can find a node to connect to is to try to connect to the cluster writer endpoint and then the cluster reader endpoint. You do this until you can establish a readable connection. These endpoints don't change unless you rename your DB cluster. Thus, you can generally leave them as static members of your application or store them in a resource file that your application reads from.

After you establish a connection using one of these endpoints, you can get information about the rest of the cluster. To do this, call the `aurora_replica_status` function. For example, the following command retrieves information with `aurora_replica_status`.

```
postgres=> SELECT server_id, session_id, highest_lsn_rcvd, cur_replay_latency_in_usec,
 now(), last_update_timestamp
FROM aurora_replica_status();

server_id | session_id | highest_lsn_rcvd | cur_replay_latency_in_usec | now |
 last_update_timestamp
-----------+--------------------------------------+------------------
+---------------------------+-------------------------------+------------------------
mynode-1 | 3e3c5044-02e2-11e7-b70d-95172646d6ca | 594221001 | 201421 | 2017-03-07
 19:50:24.695322+00 | 2017-03-07 19:50:23+00
mynode-2 | 1efdd188-02e4-11e7-becd-f12d7c88a28a | 594221001 | 201350 | 2017-03-07
 19:50:24.695322+00 | 2017-03-07 19:50:23+00
mynode-3 | MASTER_SESSION_ID | | | 2017-03-07 19:50:24.695322+00 | 2017-03-07
 19:50:23+00
(3 rows)
```

For example, the hosts section of your connection string might start with both the writer and reader cluster endpoints, as shown following.

```
myauroracluster.cluster-c9bfei4hjlrd.us-east-1-beta.rds.amazonaws.com:5432,
myauroracluster.cluster-ro-c9bfei4hjlrd.us-east-1-beta.rds.amazonaws.com:5432
```

In this scenario, your application attempts to establish a connection to any node type, primary or secondary. When your application is connected, a good practice is to first examine

the read/write status of the node. To do this, query for the result of the command `SHOW transaction_read_only`.

If the return value of the query is `OFF`, then you successfully connected to the primary node. However, suppose that the return value is `ON` and your application requires a read/write connection. In this case, you can call the `aurora_replica_status` function to determine the `server_id` that has `session_id='MASTER_SESSION_ID'`. This function gives you the name of the primary node. You can use this with the `endpointPostfix` described following.

Make sure that you're aware when you connect to a replica that has stale data. When this happens, the `aurora_replica_status` function might show out-of-date information. You can set a threshold for staleness at the application level. To check this, you can look at the difference between the server time and the `last_update_timestamp` value. In general, your application should avoid flipping between two hosts due to conflicting information returned by the `aurora_replica_status` function. Your application should try all known hosts first instead of following the data returned by `aurora_replica_status`.

Listing instances using the DescribeDBClusters API operation, example in Java

You can programmatically find the list of instances by using the Amazon SDK for Java, specifically the DescribeDBClusters API operation.

Following is a small example of how you might do this in Java 8.

```
AmazonRDS client = AmazonRDSClientBuilder.defaultClient();
DescribeDBClustersRequest request = new DescribeDBClustersRequest()
   .withDBClusterIdentifier(clusterName);
DescribeDBClustersResult result =
rdsClient.describeDBClusters(request);

DBCluster singleClusterResult = result.getDBClusters().get(0);

String pgJDBCEndpointStr =
singleClusterResult.getDBClusterMembers().stream()
   .sorted(Comparator.comparing(DBClusterMember::getIsClusterWriter)
   .reversed()) // This puts the writer at the front of the list
   .map(m -> m.getDBInstanceIdentifier() + endpointPostfix + ":" +
 singleClusterResult.getPort()))
   .collect(Collectors.joining(","));
```

Here, `pgJDBCEndpointStr` contains a formatted list of endpoints, as shown following.

```
my-node1.cksc6xlmwcyw.us-east-1-beta.rds.amazonaws.com:5432,
my-node2.cksc6xlmwcyw.us-east-1-beta.rds.amazonaws.com:5432
```

The variable `endpointPostfix` can be a constant that your application sets. Or your application can get it by querying the `DescribeDBInstances` API operation for a single instance in your cluster. This value remains constant within an Amazon Web Services Region and for an individual customer. So it saves an API call to simply keep this constant in a resource file that your application reads from. In the example preceding, it's set to the following.

```
.cksc6xlmwcyw.us-east-1-beta.rds.amazonaws.com
```

For availability purposes, a good practice is to default to using the Aurora endpoints of your DB cluster if the API isn't responding or takes too long to respond. The endpoints are guaranteed to be up to date within the time it takes to update the DNS record. Updating the DNS record with an endpoint typically takes less than 30 seconds. You can store the endpoint in a resource file that your application consumes.

Testing failover

In all cases you must have a DB cluster with two or more DB instances in it.

From the server side, certain API operations can cause an outage that can be used to test how your applications responds:

- FailoverDBCluster – This operation attempts to promote a new DB instance in your DB cluster to writer.

  The following code example shows how you can use `failoverDBCluster` to cause an outage. For more details about setting up an Amazon RDS client, see Using the Amazon SDK for Java.

  ```
  public void causeFailover() {

      final AmazonRDS rdsClient = AmazonRDSClientBuilder.defaultClient();

      FailoverDBClusterRequest request = new FailoverDBClusterRequest();
      request.setDBClusterIdentifier("cluster-identifier");

      rdsClient.failoverDBCluster(request);
  }
  ```

- RebootDBInstance – Failover isn't guaranteed with this API operation. It shuts down the database on the writer, however. You can use it to test how your application responds to connections dropping. The `ForceFailover` parameter doesn't apply for Aurora engines. Instead, use the `FailoverDBCluster` API operation.
- ModifyDBCluster – Modifying the `Port` parameter causes an outage when the nodes in the cluster begin listening on a new port. In general, your application can respond to this failure first by ensuring that only your application controls port changes. Also, ensure that it can appropriately update the endpoints it depends on. You can do this by having someone manually update the port when they make modifications at the API level. Or you can do this by using the RDS API in your application to determine if the port has changed.
- ModifyDBInstance – Modifying the `DBInstanceClass` parameter causes an outage.
- DeleteDBInstance – Deleting the primary (writer) causes a new DB instance to be promoted to writer in your DB cluster.

From the application or client side, if you use Linux, you can test how the application responds to sudden packet drops. You can do this based on whether port, host, or if TCP keepalive packets are sent or received by using the iptables command.

Fast failover example in Java

The following code example shows how an application might set up an Aurora PostgreSQL driver manager.

The application calls the `getConnection` function when it needs a connection. A call to `getConnection` can fail to find a valid host. An example is when no writer is found but the `targetServerType` parameter is set to `primary`. In this case, the calling application should simply retry calling the function.

To avoid pushing the retry behavior onto the application, you can wrap this retry call into a connection pooler. With most connection poolers, you can specify a JDBC connection string. So your application can call into `getJdbcConnectionString` and pass that to the connection pooler. Doing this means you can use faster failover with Aurora PostgreSQL.

```
import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.SQLException;
import java.sql.Statement;
import java.util.ArrayList;
```

```
import java.util.List;
import java.util.stream.Collectors;
import java.util.stream.IntStream;

import org.joda.time.Duration;

public class FastFailoverDriverManager {
   private static Duration LOGIN_TIMEOUT = Duration.standardSeconds(2);
   private static Duration CONNECT_TIMEOUT = Duration.standardSeconds(2);
   private static Duration CANCEL_SIGNAL_TIMEOUT = Duration.standardSeconds(1);
   private static Duration DEFAULT_SOCKET_TIMEOUT = Duration.standardSeconds(5);

   public FastFailoverDriverManager() {
       try {
            Class.forName("org.postgresql.Driver");
       } catch (ClassNotFoundException e) {
            e.printStackTrace();
       }

       /*
         * RO endpoint has a TTL of 1s, we should honor that here. Setting this
 aggressively makes sure that when
         * the PG JDBC driver creates a new connection, it will resolve a new different
 RO endpoint on subsequent attempts
         * (assuming there is > 1 read node in your cluster)
         */
        java.security.Security.setProperty("networkaddress.cache.ttl" , "1");
       // If the lookup fails, default to something like small to retry
       java.security.Security.setProperty("networkaddress.cache.negative.ttl" , "3");
   }

   public Connection getConnection(String targetServerType) throws SQLException {
       return getConnection(targetServerType, DEFAULT_SOCKET_TIMEOUT);
   }

   public Connection getConnection(String targetServerType, Duration queryTimeout)
 throws SQLException {
        Connection conn =
 DriverManager.getConnection(getJdbcConnectionString(targetServerType, queryTimeout));

       /*
         * A good practice is to set socket and statement timeout to be the same thing
 since both
```

```
        * the client AND server will stop the query at the same time, leaving no
running queries
        * on the backend
        */
       Statement st = conn.createStatement();
       st.execute("set statement_timeout to " + queryTimeout.getMillis());
       st.close();

      return conn;
  }

  private static String urlFormat = "jdbc:postgresql://%s"
          + "/postgres"
          + "?user=%s"
          + "&password=%s"
          + "&loginTimeout=%d"
          + "&connectTimeout=%d"
          + "&cancelSignalTimeout=%d"
          + "&socketTimeout=%d"
          + "&targetServerType=%s"
          + "&tcpKeepAlive=true"
          + "&ssl=true"
          + "&loadBalanceHosts=true";
  public String getJdbcConnectionString(String targetServerType, Duration
queryTimeout) {
      return String.format(urlFormat,
               getFormattedEndpointList(getLocalEndpointList()),
               CredentialManager.getUsername(),
               CredentialManager.getPassword(),
               LOGIN_TIMEOUT.getStandardSeconds(),
               CONNECT_TIMEOUT.getStandardSeconds(),
               CANCEL_SIGNAL_TIMEOUT.getStandardSeconds(),
               queryTimeout.getStandardSeconds(),
               targetServerType
      );
  }

  private List<String> getLocalEndpointList() {
      /*
        * As mentioned in the best practices doc, a good idea is to read a local
resource file and parse the cluster endpoints.
        * For illustration purposes, the endpoint list is hardcoded here
        */
       List<String> newEndpointList = new ArrayList<>();
```

```
        newEndpointList.add("myauroracluster.cluster-c9bfei4hjlrd.us-east-1-
beta.rds.amazonaws.com:5432");
        newEndpointList.add("myauroracluster.cluster-ro-c9bfei4hjlrd.us-east-1-
beta.rds.amazonaws.com:5432");

        return newEndpointList;
    }

    private static String getFormattedEndpointList(List<String> endpoints) {
        return IntStream.range(0, endpoints.size())
                .mapToObj(i -> endpoints.get(i).toString())
                .collect(Collectors.joining(","));
    }
}
```

Fast recovery after failover with cluster cache management for Aurora PostgreSQL

For fast recovery of the writer DB instance in your Aurora PostgreSQL clusters if there's a failover, use cluster cache management for Amazon Aurora PostgreSQL. Cluster cache management ensures that application performance is maintained if there's a failover.

In a typical failover situation, you might see a temporary but large performance degradation after failover. This degradation occurs because when the failover DB instance starts, the buffer cache is empty. An empty cache is also known as a *cold cache*. A cold cache degrades performance because the DB instance has to read from the slower disk, instead of taking advantage of values stored in the buffer cache.

With cluster cache management, you set a specific reader DB instance as the failover target. Cluster cache management ensures that the data in the designated reader's cache is kept synchronized with the data in the writer DB instance's cache. The designated reader's cache with prefilled values is known as a *warm cache*. If a failover occurs, the designated reader uses values in its warm cache immediately when it's promoted to the new writer DB instance. This approach provides your application much better recovery performance.

Cluster cache management requires that the designated reader instance have the same instance class type and size (`db.r5.2xlarge` or `db.r5.xlarge`, for example) as the writer. Keep this in mind when you create your Aurora PostgreSQL DB clusters so that your cluster can recover during a failover. For a listing of instance class types and sizes, see Hardware specifications for DB instance classes for Aurora.

> **Note**
>
> Cluster cache management isn't supported for Aurora PostgreSQL secondary DB cluster that are part of Aurora global databases. For primary clusters where this feature is supported, it's recommended that no workload should run on the designated tier-0 reader.

Contents

- Configuring cluster cache management
  - Enabling cluster cache management
  - Setting the promotion tier priority for the writer DB instance
  - Setting the promotion tier priority for a reader DB instance
- Monitoring the buffer cache
- Troubleshooting CCM configuration

Configuring cluster cache management

To configure cluster cache management, do the following processes in order.

Topics

- Enabling cluster cache management
- Setting the promotion tier priority for the writer DB instance
- Setting the promotion tier priority for a reader DB instance

> **Note**
>
> Allow at least 1 minute after completing these steps for cluster cache management to be fully operational.

Enabling cluster cache management

To enable cluster cache management, take the steps described following.

Console

To enable cluster cache management

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. In the list, choose the parameter group for your Aurora PostgreSQL DB cluster.

   The DB cluster must use a parameter group other than the default, because you can't change values in a default parameter group.
4. For **Parameter group actions**, choose **Edit**.
5. Set the value of the `apg_ccm_enabled` cluster parameter to **1**.
6. Choose **Save changes**.

Amazon CLI

To enable cluster cache management for an Aurora PostgreSQL DB cluster, use the Amazon CLI `modify-db-cluster-parameter-group` command with the following required parameters:

- `--db-cluster-parameter-group-name`
- `--parameters`

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
    --db-cluster-parameter-group-name my-db-cluster-parameter-group \
    --parameters "ParameterName=apg_ccm_enabled,ParameterValue=1,ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
    --db-cluster-parameter-group-name my-db-cluster-parameter-group ^
    --parameters "ParameterName=apg_ccm_enabled,ParameterValue=1,ApplyMethod=immediate"
```

Setting the promotion tier priority for the writer DB instance

For cluster cache management, make sure that the promotion priority is **tier-0** for the writer DB instance of the Aurora PostgreSQL DB cluster. The *promotion tier priority* is a value that specifies the order in which an Aurora reader is promoted to the writer DB instance after a failure. Valid values are 0–15, where 0 is the first priority and 15 is the last priority. For more information about the promotion tier, see Fault tolerance for an Aurora DB cluster.

Console

To set the promotion priority for the writer DB instance to tier-0

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the **Writer** DB instance of the Aurora PostgreSQL DB cluster.
4. Choose **Modify**. The **Modify DB Instance** page appears.
5. On the **Additional configuration** panel, choose **tier-0** for the **Failover priority**.
6. Choose **Continue** and check the summary of modifications.
7. To apply the changes immediately after you save them, choose **Apply immediately**.
8. Choose **Modify DB Instance** to save your changes.

Amazon CLI

To set the promotion tier priority to 0 for the writer DB instance using the Amazon CLI, call the modify-db-instance command with the following required parameters:

- `--db-instance-identifier`
- `--promotion-tier`
- `--apply-immediately`

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-instance \
```

```
    --db-instance-identifier writer-db-instance \
    --promotion-tier 0 \
    --apply-immediately
```

For Windows:

```
aws rds modify-db-instance ^
    --db-instance-identifier writer-db-instance ^
    ---promotion-tier 0  ^
    --apply-immediately
```

Setting the promotion tier priority for a reader DB instance

You must set only one reader DB instance for cluster cache management. To do so, choose a reader from the Aurora PostgreSQL cluster that is the same instance class and size as the writer DB instance. For example, if the writer uses db.r5.xlarge, choose a reader that uses this same instance class type and size. Then set its promotion tier priority to 0.

The *promotion tier priority* is a value that specifies the order in which an Aurora reader is promoted to the writer DB instance after a failure. Valid values are 0–15, where 0 is the first priority and 15 is the last priority.

Console

To set the promotion priority of the reader DB instance to tier-0

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose a **Reader** DB instance of the Aurora PostgreSQL DB cluster that is the same instance class as the writer DB instance.
4. Choose **Modify**. The **Modify DB Instance** page appears.
5. On the **Additional configuration** panel, choose **tier-0** for the **Failover priority**.
6. Choose **Continue** and check the summary of modifications.
7. To apply the changes immediately after you save them, choose **Apply immediately**.
8. Choose **Modify DB Instance** to save your changes.

Amazon CLI

To set the promotion tier priority to 0 for the reader DB instance using the Amazon CLI, call the modify-db-instance command with the following required parameters:

- `--db-instance-identifier`
- `--promotion-tier`
- `--apply-immediately`

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-instance \
    --db-instance-identifier reader-db-instance \
    --promotion-tier 0 \
    --apply-immediately
```

For Windows:

```
aws rds modify-db-instance ^
    --db-instance-identifier reader-db-instance ^
    ---promotion-tier 0  ^
    --apply-immediately
```

Monitoring the buffer cache

After setting up cluster cache management, you can monitor the state of synchronization between the writer DB instance's buffer cache and the designated reader's warm buffer cache. To examine the buffer cache contents on both the writer DB instance and the designated reader DB instance, use the PostgreSQL `pg_buffercache` module. For more information, see the PostgreSQL `pg_buffercache` documentation.

Using the `aurora_ccm_status` Function

Cluster cache management also provides the `aurora_ccm_status` function. Use the `aurora_ccm_status` function on the writer DB instance to get the following information about the progress of cache warming on the designated reader:

- `buffers_sent_last_minute` – How many buffers have been sent to the designated reader in the last minute.
- `buffers_found_last_minute` – The number of frequently accessed buffers identified during the past minute.
- `buffers_sent_last_scan` – How many buffers have been sent to the designated reader during the last complete scan of the buffer cache.
- `buffers_found_last_scan` – How many buffers have been identified as frequently accessed and needed to be sent during the last complete scan of the buffer cache. Buffers already cached on the designated reader aren't sent.
- `buffers_sent_current_scan` – How many buffers have been sent so far during the current scan.
- `buffers_found_current_scan` – How many buffers have been identified as frequently accessed in the current scan.
- `current_scan_progress` – How many buffers have been visited so far during the current scan.

The following example shows how to use the `aurora_ccm_status` function to convert some of its output into a warm rate and warm percentage.

```
SELECT buffers_sent_last_minute*8/60 AS warm_rate_kbps,
   100*(1.0-buffers_sent_last_scan::float/buffers_found_last_scan) AS warm_percent
   FROM aurora_ccm_status();
```

Troubleshooting CCM configuration

When you enable `apg_ccm_enabled` cluster parameter, cluster cache management is automatically turned on at the instance level on the writer DB instance and one reader DB instance on the Aurora PostgreSQL DB cluster. The writer and reader instance should use the same instance class type and size. Their promotion tier priority is set to `0`. Other reader instances in the DB cluster should have a non-zero promotion tier and cluster cache management is disabled for those instances.

The following reasons may lead to issues in the configuration and disable cluster cache management:

- When there is no single reader DB instance set to promotion tier 0.
- When the writer DB instance is not set to promotion tier 0.

- When more than one reader DB instances are set to promotion tier 0.
- When the writer and one reader DB instances with promotion tier 0 doesn't have the same instance size.

Managing Aurora PostgreSQL connection churn with pooling

When client applications connect and disconnect so often that Aurora PostgreSQL DB cluster response time slows, the cluster is said to be experiencing *connection churn*. Each new connection to the Aurora PostgreSQL DB cluster endpoint consumes resources, thus reducing the resources that can be used to process the actual workload. Connection churn is an issue that we recommend that you manage by following some of the best practices discussed following.

For starters, you can improve response times on Aurora PostgreSQL DB clusters that have high rates of connection churn. To do this, you can use a connection pooler, such as RDS Proxy. A *connection pooler* provides a cache of ready to use connections for clients. Almost all versions of Aurora PostgreSQL support RDS Proxy. For more information, see Amazon RDS Proxy with Aurora PostgreSQL.

If your specific version of Aurora PostgreSQL doesn't support RDS Proxy, you can use another PostgreSQL–compatible connection pooler, such as PgBouncer. To learn more, see the PgBouncer website.

To see if your Aurora PostgreSQL DB cluster can benefit from connection pooling, you can check the `postgresql.log` file for connections and disconnections. You can also use Performance Insights to find out how much connection churn your Aurora PostgreSQL DB cluster is experiencing. Following, you can find information about both topics.

Logging connections and disconnections

The PostgreSQL `log_connections` and `log_disconnections` parameters can capture connections and disconnections to the writer instance of the Aurora PostgreSQL DB cluster. By default, these parameters are turned off. To turn these parameters on, use a custom parameter group and turn on by changing the value to 1. For more information about custom parameter groups, see DB cluster parameter groups for Amazon Aurora DB clusters. To check the settings, connect to your DB cluster endpoint for Aurora PostgreSQL by using psql and query as follows.

```
labdb=> SELECT setting FROM pg_settings
  WHERE name = 'log_connections';
```

```
 setting
---------
on
(1 row)
labdb=> SELECT setting FROM pg_settings
  WHERE name = 'log_disconnections';
setting
---------
on
(1 row)
```

With both of these parameters turned on, the log captures all new connections and disconnections. You see the user and database for each new authorized connection. At disconnection time, the session duration is also logged, as shown in the following example.

```
2022-03-07 21:44:53.978 UTC [16641] LOG: connection authorized: user=labtek
 database=labdb application_name=psql
2022-03-07 21:44:55.718 UTC [16641] LOG: disconnection: session time: 0:00:01.740
 user=labtek database=labdb host=[local]
```

To check your application for connection churn, turn on these parameters if they're not on already. Then gather data in the PostgreSQL log for analysis by running your application with a realistic workload and time period. You can view the log file in the RDS console. Choose the writer instance of your Aurora PostgreSQL DB cluster, and then choose the **Logs & events** tab. For more information, see Viewing and listing database log files.

Or you can download the log file from the console and use the following command sequence. This sequence finds the total number of connections authorized and dropped per minute.

```
grep "connection authorized\|disconnection: session time:"
 postgresql.log.2022-03-21-16|\
awk {'print $1,$2}' |\
sort |\
uniq -c |\
sort -n -k1
```

In the example output, you can see a spike in authorized connections followed by disconnections starting at 16:12:10.

```
.....
,.......
```


```
.........
5 2022-03-21 16:11:55 connection authorized:
9 2022-03-21 16:11:55 disconnection: session
5 2022-03-21 16:11:56 connection authorized:
5 2022-03-21 16:11:57 connection authorized:
5 2022-03-21 16:11:57 disconnection: session
32 2022-03-21 16:12:10 connection authorized:
30 2022-03-21 16:12:10 disconnection: session
31 2022-03-21 16:12:11 connection authorized:
27 2022-03-21 16:12:11 disconnection: session
27 2022-03-21 16:12:12 connection authorized:
27 2022-03-21 16:12:12 disconnection: session
41 2022-03-21 16:12:13 connection authorized:
47 2022-03-21 16:12:13 disconnection: session
46 2022-03-21 16:12:14 connection authorized:
41 2022-03-21 16:12:14 disconnection: session
24 2022-03-21 16:12:15 connection authorized:
29 2022-03-21 16:12:15 disconnection: session
28 2022-03-21 16:12:16 connection authorized:
24 2022-03-21 16:12:16 disconnection: session
40 2022-03-21 16:12:17 connection authorized:
42 2022-03-21 16:12:17 disconnection: session
40 2022-03-21 16:12:18 connection authorized:
40 2022-03-21 16:12:18 disconnection: session
.....
,.......
.........
1 2022-03-21 16:14:10 connection authorized:
1 2022-03-21 16:14:10 disconnection: session
1 2022-03-21 16:15:00 connection authorized:
1 2022-03-21 16:16:00 connection authorized:
```

With this information, you can decide if your workload can benefit from a connection pooler. For more detailed analysis, you can use Performance Insights.

Detecting connection churn with Performance Insights


You can use Performance Insights to assess the amount of connection churn on your Aurora PostgreSQL-Compatible Edition DB cluster. When you create an Aurora PostgreSQL DB cluster, the setting for Performance Insights is turned on by default. If you cleared this choice when you created your DB cluster, modify your cluster to turn on the feature. For more information, see Modifying an Amazon Aurora DB cluster.

With Performance Insights running on your Aurora PostgreSQL DB cluster, you can choose the metrics that you want to monitor. You can access Performance Insights from the navigation pane in the console. You can also access Performance Insights from the **Monitoring** tab of the writer instance for your Aurora PostgreSQL DB cluster, as shown in the following image.

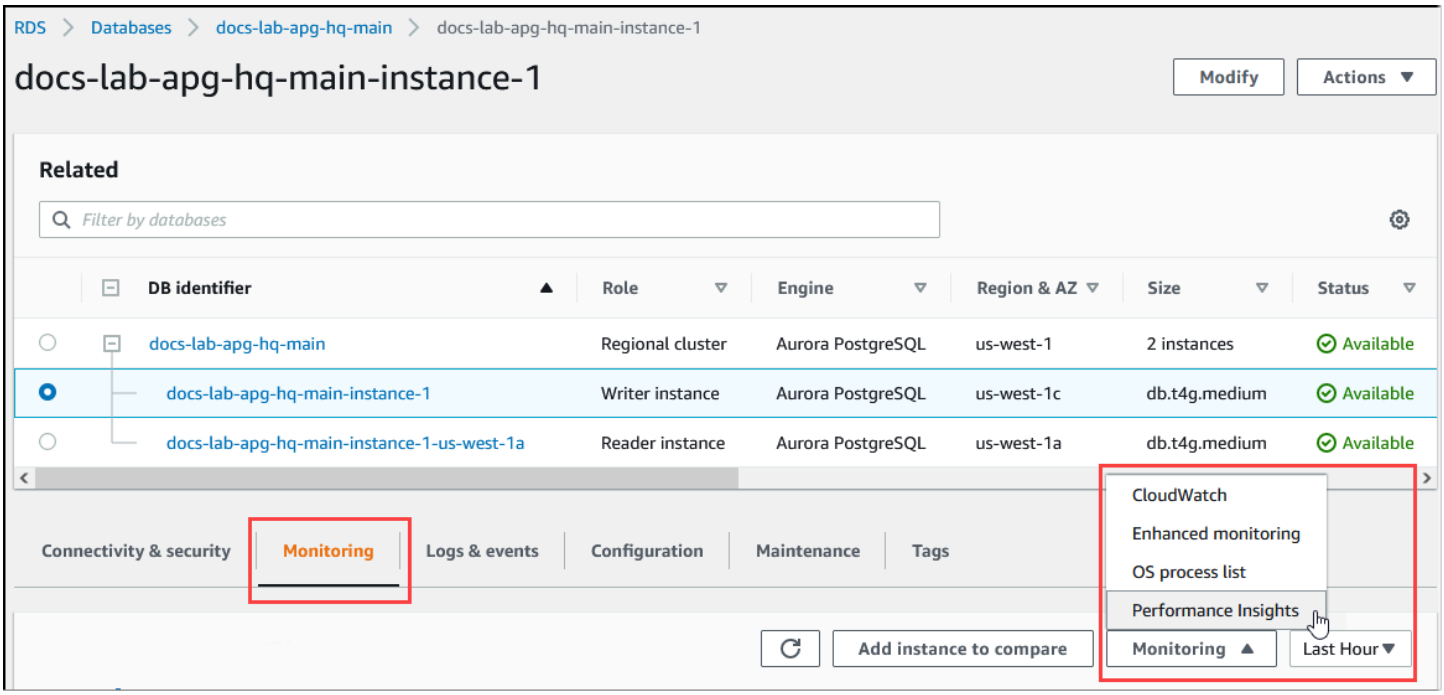

From the Performance Insights console, choose **Manage metrics**. To analyze your Aurora PostgreSQL DB cluster's connection and disconnection activity, choose the following metrics. These are all metrics from PostgreSQL.

- `xact_commit` – The number of committed transactions.
- `total_auth_attempts` – The number of attempted authenticated user connections per minute.
- `numbackends` – The number of backends currently connected to the database.

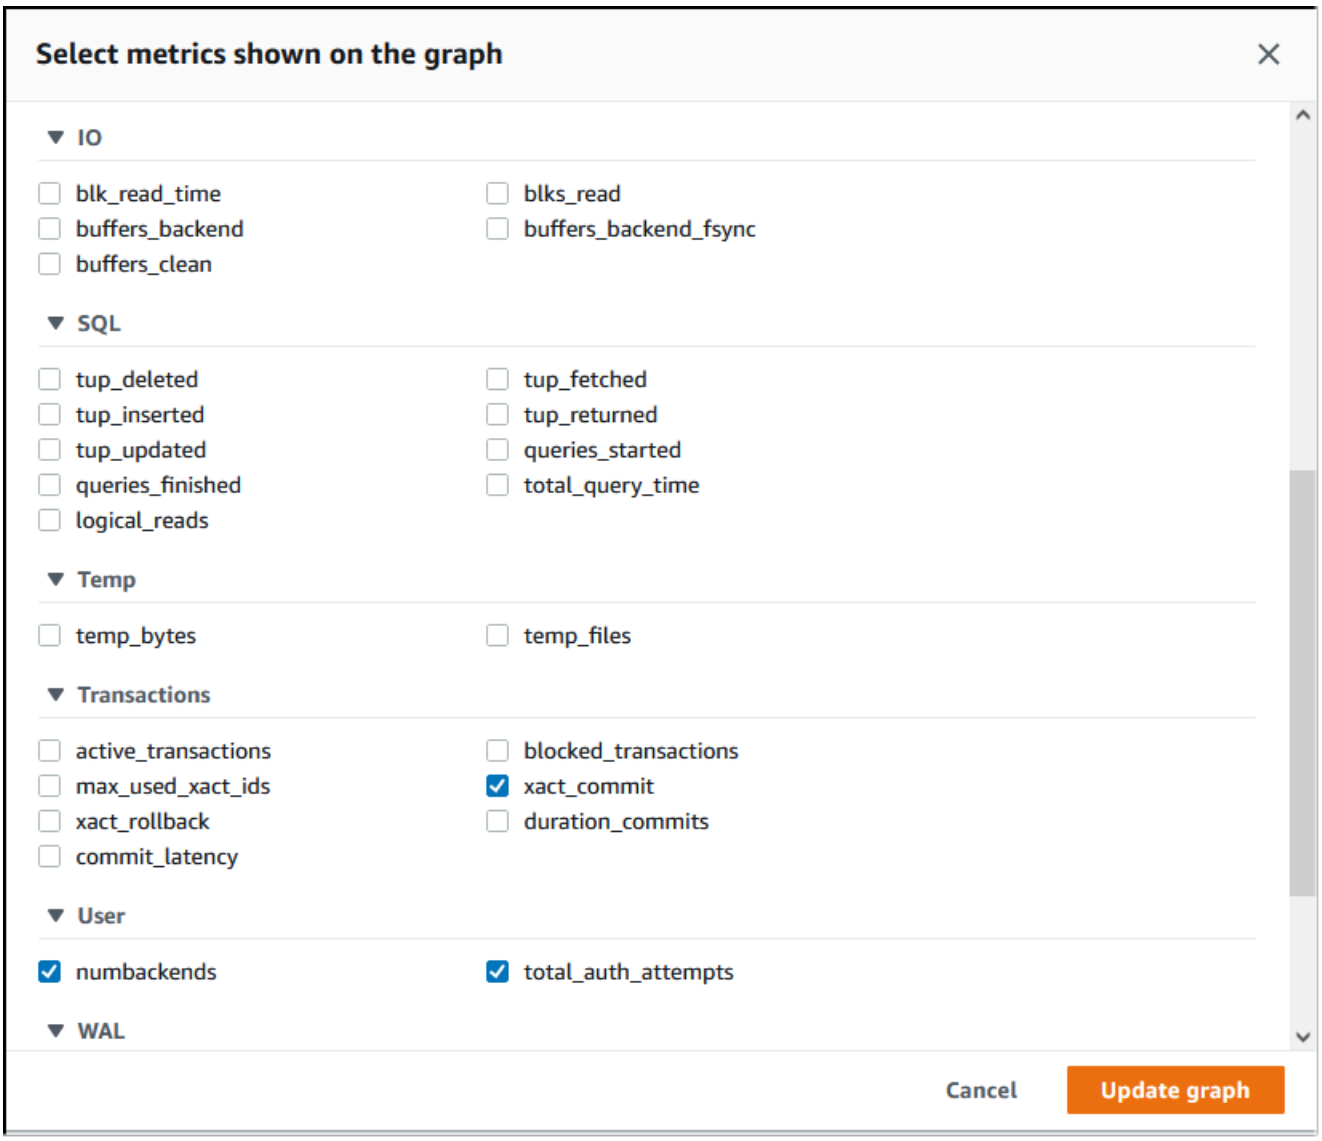


To save the settings and display connection activity, choose **Update graph**.

In the following image, you can see the impact of running pgbench with 100 users. The line showing connections is on a consistent upward slope. To learn more about pgbench and how to use it, see pgbench in PostgreSQL documentation.



The image shows that running a workload with as few as 100 users without a connection pooler can cause a significant increase in the number of `total_auth_attempts` throughout the duration of workload processing. Note that it's best to keep `total_auth_attempts` as close to zero as possible.

With RDS Proxy connection pooling, the connection attempts increase at the start of the workload. After setting up the connection pool, the average declines. The resources used by transactions and backend use stays consistent throughout workload processing.

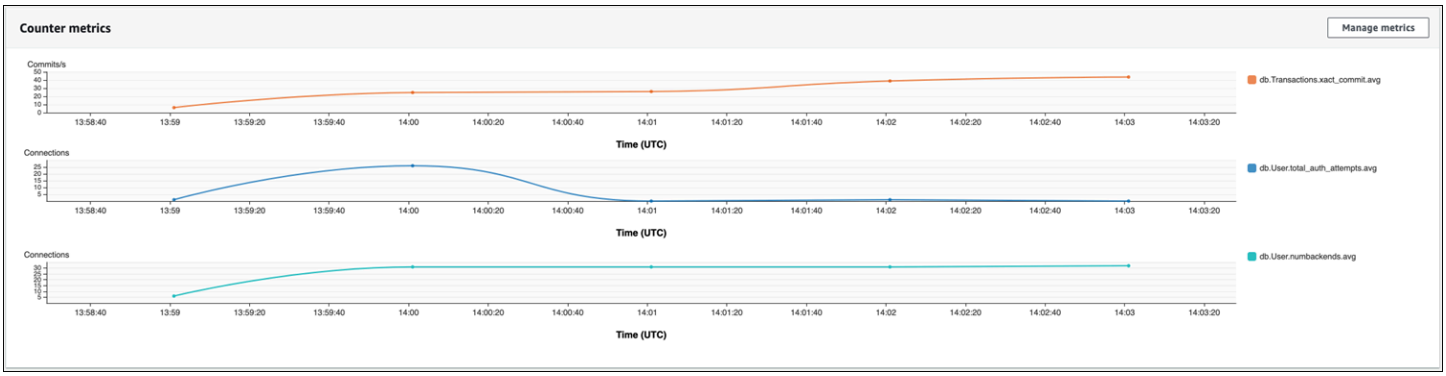

For more information about using Performance Insights with your Aurora PostgreSQL DB cluster, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora. To analyze the metrics, see Database Insights.

Demonstrating the benefits of connection pooling

As mentioned previously, if you determine that your Aurora PostgreSQL DB cluster has a connection churn problem, you can use RDS Proxy for improved performance. Following, you can find an example that shows the differences in processing a workload when connections are pooled and when they're not. The example uses pgbench to model a transaction workload.

As is psql, pgbench is a PostgreSQL client application that you can install and run from your local client machine. You can also install and run it from the Amazon EC2 instance that you use

for managing your Aurora PostgreSQL DB cluster. For more information, see pgbench in the PostgreSQL documentation.

To step through this example, you first create the pgbench environment in your database. The following command is the basic template for initializing the pgbench tables in the specified database. This example uses the default main user account, `postgres`, for the login. Change it as needed for your Aurora PostgreSQL DB cluster. You create the pgbench environment in a database on the writer instance of your cluster.

> **Note**
>
> The pgbench initialization process drops and recreates tables named `pgbench_accounts`, `pgbench_branches`, `pgbench_history`, and `pgbench_tellers`. Be sure that the database that you choose for *dbname* when you initialize pgbench doesn't use these names.

```
pgbench -U postgres -h db-cluster-instance-1.111122223333.aws-region.rds.amazonaws.com
 -p 5432 -d -i -s 50 dbname
```

For pgbench, specify the following parameters.

-d

Outputs a debugging report as pgbench runs.

-h

Specifies the endpoint of the Aurora PostgreSQL DB cluster's writer instance.

-i

Initializes the pgbench environment in the database for the benchmark tests.

-p

Identifies the port used for database connections. The default for Aurora PostgreSQL is typically 5432 or 5433.

-s

Specifies the scaling factor to use for populating the tables with rows. The default scaling factor is 1, which generates 1 row in the `pgbench_branches` table, 10 rows in the `pgbench_tellers` table, and 100000 rows in the `pgbench_accounts` table.

-U

Specifies the user account for the Aurora PostgreSQL DB cluster's writer instance.

After the pgbench environment is set up, you can then run benchmarking tests with and without connection pooling. The default test consists of a series of five SELECT, UPDATE, and INSERT commands per transaction that run repeatedly for the time specified. You can specify scaling factor, number of clients, and other details to model your own use cases.

As an example, the command that follows runs the benchmark for 60 seconds (-T option, for time) with 20 concurrent connections (the -c option). The -C option makes the test run using a new connection each time, rather than once per client session. This setting gives you an indication of the connection overhead.

```
pgbench -h docs-lab-apg-133-test-instance-1.c3zr2auzukpa.us-west-1.rds.amazonaws.com -U
 postgres -p 5432 -T 60 -c 20 -C labdb
Password:**********
pgbench (14.3, server 13.3)
  starting vacuum...end.
  transaction type: <builtin: TPC-B (sort of)>
    scaling factor: 50
    query mode: simple
    number of clients: 20
    number of threads: 1
    duration: 60 s
    number of transactions actually processed: 495
    latency average = 2430.798 ms
    average connection time = 120.330 ms
    tps = 8.227750 (including reconnection times)
```

Running pgbench on the writer instance of an Aurora PostgreSQL DB cluster without reusing connections shows that only about 8 transactions are processed each second. This gives a total of 495 transactions during the 1-minute test.

If you reuse connections, the response from Aurora PostgreSQL DB cluster for the number of users is almost 20 times faster. With reuse, a total of 9,042 transactions is processed compared to 495 in the same amount of time and for the same number of user connections. The difference is that in the following, each connection is being reused.

```
pgbench -h docs-lab-apg-133-test-instance-1.c3zr2auzukpa.us-west-1.rds.amazonaws.com -U
 postgres -p 5432 -T 60 -c 20 labdb
Password:*********
pgbench (14.3, server 13.3)
      starting vacuum...end.
      transaction type: <builtin: TPC-B (sort of)>
      scaling factor: 50
      query mode: simple
      number of clients: 20
      number of threads: 1
      duration: 60 s
      number of transactions actually processed: 9042
      latency average = 127.880 ms
      initial connection time = 2311.188 ms
      tps = 156.396765 (without initial connection time)
```

This example shows you that pooling connections can significantly improve response times. For information about setting up RDS Proxy for your Aurora PostgreSQL DB cluster, see Amazon RDS Proxy for Aurora.

Dead connection handling in PostgreSQL

Dead connections occur when a database session remains active on the server despite the client application having abandoned or terminated abnormally. This situation typically arises when client processes crash or terminate unexpectedly without properly closing their database connections or canceling ongoing requests.

PostgreSQL efficiently identifies and cleans up dead connections when server processes are idle or attempt to send data to clients. However, detection is challenging for sessions that are idle, waiting for client input, or actively running queries. To handle these scenarios, PostgreSQL provides `tcp_keepalives_*`, `tcp_user_timeout`, and `client_connection_check_interval` parameters.

Topics

- Understanding TCP keepalive

- Key TCP keepalive parameters in Aurora PostgreSQL
- Use cases for TCP keepalive settings
- Best practices

Understanding TCP keepalive

TCP Keepalive is a protocol-level mechanism that helps maintain and verify connection integrity. Each TCP connection maintains kernel-level settings that govern keepalive behavior. When the keepalive timer expires, the system does the following:

- Sends a probe packet with no data and the ACK flag set.
- Expects a response from the remote endpoint according to TCP/IP specifications.
- Manages connection state based on the response or lack thereof.

Key TCP keepalive parameters in Aurora PostgreSQL

Parameter	Description	Default values
`tcp_keepalives_idle`	Specifies number of seconds of inactivity before sending keepalive message.	300
`tcp_keepalives_interval`	Specifies number of seconds between retransmissions of unacknowledged keepalive messages.	30
`tcp_keepalives_count`	Maximum lost keepalive messages before declaring connection dead	2
`tcp_user_timeout`	Specifies how long (in Milliseconds) unacknowledged data can remain before forcibly closing the connection.	0

Parameter	Description	Default values
client_connection_check_interval	Sets the interval (in Milliseconds) for checking client connection status during long-running queries. This ensures quicker detection of closed connections.	0

Use cases for TCP keepalive settings

Keeping idle sessions alive

To prevent idle connections from being terminated by firewalls or routers due to inactivity:

- Configure tcp_keepalives_idle to send keepalive packets at regular intervals.

Detecting dead connections

To detect dead connections promptly:

- Adjust tcp_keepalives_idle, tcp_keepalives_interval, and tcp_keepalives_count. For example, with Aurora PostgreSQL defaults, it takes about a minute (2 probes × 30 seconds) to detect a dead connection. Lowering these values can speed up detection.
- Use tcp_user_timeout to specify the maximum wait time for an acknowledgment.

TCP keepalive settings help the kernel detect dead connections, but PostgreSQL may not act until the socket is used. If a session is running a long query, dead connections might only be detected after query completion. In PostgreSQL 14 and higher versions, client_connection_check_interval can expedite dead connection detection by periodically polling the socket during query execution.

Best practices

- **Set reasonable keepalive intervals:** Tune tcp_user_timeout, tcp_keepalives_idle, tcp_keepalives_count and tcp_keepalives_interval to balance detection speed and resource use.

- **Optimize for your environment:** Align settings with network behavior, firewall policies, and session needs.
- **Leverage PostgreSQL features:** Use `client_connection_check_interval` in PostgreSQL 14 and higher versions for efficient connection checks.

Tuning memory parameters for Aurora PostgreSQL

In Amazon Aurora PostgreSQL, you can use several parameters that control the amount of memory used for various processing tasks. If a task takes more memory than the amount set for a given parameter, Aurora PostgreSQL uses other resources for processing, such as by writing to disk. This can cause your Aurora PostgreSQL DB cluster to slow or potentially halt, with an out-of-memory error.

The default setting for each memory parameter can usually handle its intended processing tasks. However, you can also tune your Aurora PostgreSQL DB cluster's memory-related parameters. You do this tuning to ensure that enough memory is allocated for processing your specific workload.

Following, you can find information about parameters that control memory management. You can also learn how to assess memory utilization.

Checking and setting parameter values

The parameters that you can set to manage memory and assess your Aurora PostgreSQL DB cluster's memory usage include the following:

- `work_mem` – Specifies the amount of memory that the Aurora PostgreSQL DB cluster uses for internal sort operations and hash tables before it writes to temporary disk files.
- `log_temp_files` – Logs temporary file creation, file names, and sizes. When this parameter is turned on, a log entry is stored for each temporary file that gets created. Turn this on to see how frequently your Aurora PostgreSQL DB cluster needs to write to disk. Turn it off again after you've gathered information about your Aurora PostgreSQL DB cluster's temporary file generation, to avoid excessive logging.
- `logical_decoding_work_mem` – Specifies the amount of memory (in kilobytes) to be used by each internal reorder buffer before spilling to disk. This memory is used for *Logical decoding*, which is the process to create a replica. It is done by converting data from the write-ahead log (WAL) file to the logical streaming output needed by the target.

The value of this parameter creates a single buffer of the size specified for each replication connection. By default, it's 65536 KB. After this buffer is filled, the excess is written to disk as a file. To minimize disk activity, you can set the value of this parameter to a much higher value than that of `work_mem`.

These are all dynamic parameters, so you can change them for the current session. To do this, connect to the Aurora PostgreSQL DB cluster with psql and using the SET statement, as shown following.

```
SET parameter_name TO parameter_value;
```

Session settings last for the duration of the session only. When the session ends, the parameter reverts to its setting in the DB cluster parameter group. Before changing any parameters, first check the current values by querying the `pg_settings` table, as follows.

```
SELECT unit, setting, max_val
   FROM pg_settings WHERE name='parameter_name';
```

For example, to find the value of the `work_mem` parameter, connect to the Aurora PostgreSQL DB cluster's writer instance and run the following query.

```
SELECT unit, setting, max_val, pg_size_pretty(max_val::numeric)
  FROM pg_settings WHERE name='work_mem';
unit  | setting  | max_val   | pg_size_pretty
------+----------+-----------+----------------
 kB   | 1024     | 2147483647| 2048 MB
(1 row)
```

Changing parameter settings so that they persist requires using a custom DB cluster parameter group. After exercising your Aurora PostgreSQL DB cluster with different values for these parameters using the SET statement, you can create a custom parameter group and apply to your Aurora PostgreSQL DB cluster. For more information, see Parameter groups for Amazon Aurora.

Understanding the working memory parameter

The working memory parameter (`work_mem`) specifies the maximum amount of memory that Aurora PostgreSQL can use to process complex queries. Complex queries include those that involve sorting or grouping operations—in other words, queries that use the following clauses:


- ORDER BY
- DISTINCT
- GROUP BY
- JOIN (MERGE and HASH)

The query planner indirectly affects how your Aurora PostgreSQL DB cluster uses working memory. The query planner generates execution plans for processing SQL statements. A given plan might break up a complex query into multiple units of work that can be run in parallel. When possible, Aurora PostgreSQL uses the amount of memory specified in the `work_mem` parameter for each session before writing to disk for each parallel process.

Multiple database users running multiple operations concurrently and generating multiple units of work in parallel can exhaust your Aurora PostgreSQL DB cluster's allocated working memory. This can lead to excessive temporary file creation and disk I/O, or worse, it can lead to an out-of-memory error.

Identifying temporary file use

Whenever the memory required to process queries exceeds the value specified in the `work_mem` parameter, the working data is offloaded to disk in a temporary file. You can see how often this occurs by turning on the `log_temp_files` parameter. By default, this parameter is off (it's set to -1). To capture all temporary file information, set this parameter to 0. Set `log_temp_files` to any other positive integer to capture temporary file information for files equal to or greater than that amount of data (in kilobytes). In the following image, you can see an example from Amazon Web Services Management Console.

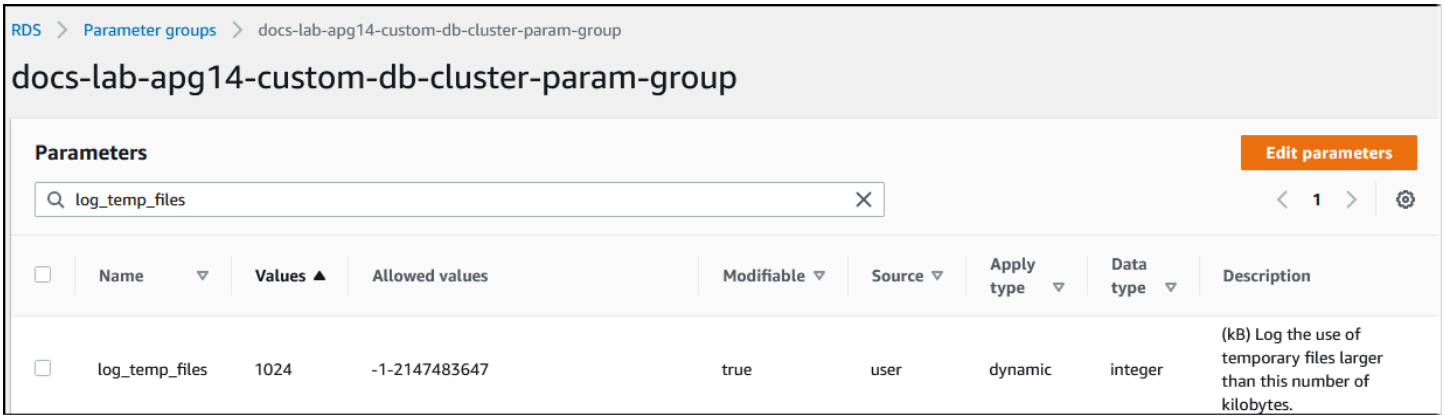

After configuring temporary file logging, you can test with your own workload to see if your working memory setting is sufficient. You can also simulate a workload by using pgbench, a simple benchmarking application from the PostgreSQL community.

The following example initializes (`-i`) pgbench by creating the necessary tables and rows for running the tests. In this example, the scaling factor (`-s 50`) creates 50 rows in the `pgbench_branches` table, 500 rows in `pgbench_tellers`, and 5,000,000 rows in the `pgbench_accounts` table in the `labdb` database.

```
pgbench -U postgres -h your-cluster-instance-1.111122223333.aws-regionrds.amazonaws.com
 -p 5432 -i -s 50 labdb
Password:
dropping old tables...
NOTICE:  table "pgbench_accounts" does not exist, skipping
NOTICE:  table "pgbench_branches" does not exist, skipping
NOTICE:  table "pgbench_history" does not exist, skipping
NOTICE:  table "pgbench_tellers" does not exist, skipping
creating tables...
generating data (client-side)...
5000000 of 5000000 tuples (100%) done (elapsed 15.46 s, remaining 0.00 s)
vacuuming...
creating primary keys...
done in 61.13 s (drop tables 0.08 s, create tables 0.39 s, client-side generate 54.85
 s, vacuum 2.30 s, primary keys 3.51 s)
```

After initializing the environment, you can run the benchmark for a specific time (`-T`) and the number of clients (`-c`). This example also uses the `-d` option to output debugging information as the transactions are processed by the Aurora PostgreSQL DB cluster.

```
pgbench -h -U postgres your-cluster-instance-1.111122223333.aws-regionrds.amazonaws.com
 -p 5432 -d -T 60 -c 10 labdb
Password:*******
pgbench (14.3)
starting vacuum...end.
transaction type: <builtin: TPC-B (sort of)>
scaling factor: 50
query mode: simple
number of clients: 10
number of threads: 1
duration: 60 s
number of transactions actually processed: 1408
latency average = 398.467 ms
```

```
initial connection time = 4280.846 ms
tps = 25.096201 (without initial connection time)
```

For more information about pgbench, see pgbench in the PostgreSQL documentation.


You can use the psql metacommand command (\d) to list the relations such as tables, views, and indexes created by pgbench.

```
labdb=>  \d pgbench_accounts
 Table "public.pgbench_accounts"
  Column  |     Type      | Collation | Nullable | Default
----------+---------------+-----------+----------+---------
 aid      | integer       |           | not null |
 bid      | integer       |           |          |
 abalance | integer       |           |          |
 filler   | character(84) |           |          |
Indexes:
    "pgbench_accounts_pkey" PRIMARY KEY, btree (aid)
```

As shown in the output, the `pgbench_accounts` table is indexed on the `aid` column. To ensure that this next query uses working memory, query any nonindexed column, such as that shown in the following example.

```
postgres=> SELECT * FROM pgbench_accounts ORDER BY bid;
```

Check the log for the temporary files. To do so, open the Amazon Web Services Management Console, choose the Aurora PostgreSQL DB cluster instance, and then choose the **Logs & Events** tab. View the logs in the console or download for further analysis. As shown in the following image, the size of the temporary files needed to process the query indicates that you should consider increasing the amount specified for the `work_mem` parameter.

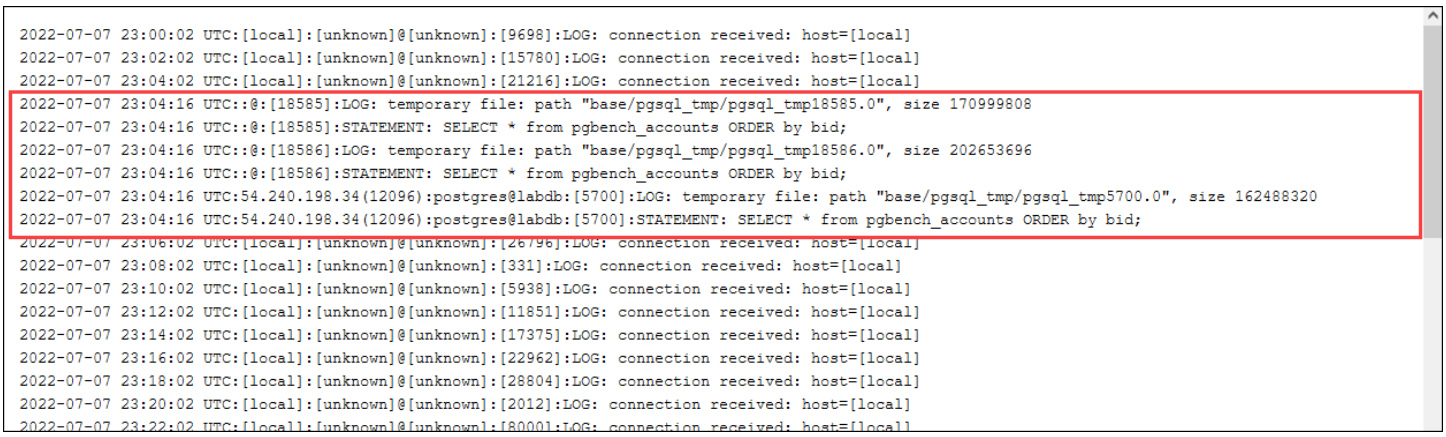

You can configure this parameter differently for individuals and groups, based on your operational needs. For example, you can set the `work_mem` parameter to 8 GB for the role named `dev_team`.

```
postgres=> ALTER ROLE dev_team SET work_mem='8GB';
```

With this setting for `work_mem`, any role that's a member of the `dev_team` role is allotted up to 8 GB of working memory.

Using indexes for faster response time

If your queries are taking too long to return results, you can verify that your indexes are being used as expected. First, turn on `\timing`, the psql metacommand, as follows.

```
postgres=>  \timing on
```

After turning on timing, use a simple SELECT statement.

```
postgres=> SELECT COUNT(*) FROM
  (SELECT * FROM pgbench_accounts
  ORDER BY bid)
  AS accounts;
count
-------
5000000
(1 row)
Time: 3119.049 ms (00:03.119)
```

As shown in the output, this query took just over 3 seconds to complete. To improve the response time, create an index on `pgbench_accounts`, as follows.

```
postgres=> CREATE INDEX ON pgbench_accounts(bid);
CREATE INDEX
```

Rerun the query, and notice the faster response time. In this example, the query completed about 5 times faster, in about half a second.

```
postgres=>  SELECT COUNT(*) FROM (SELECT * FROM pgbench_accounts ORDER BY bid) AS
 accounts;
 count
```

```
-------
 5000000
(1 row)
Time: 567.095 ms
```

Adjusting working memory for logical decoding

Logical replication has been available in all versions of Aurora PostgreSQL since its introduction in PostgreSQL version 10. When you configure logical replication, you can also set the `logical_decoding_work_mem` parameter to specify the amount of memory that the logical decoding process can use for the decoding and streaming process.

During logical decoding, write-ahead log (WAL) records are converted to SQL statements that are then sent to another target for logical replication or another task. When a transaction is written to the WAL and then converted, the entire transaction must fit into the value specified for `logical_decoding_work_mem`. By default, this parameter is set to 65536 KB. Any overflow is written to disk. This means that it must be reread from the disk before it can be sent to its destination, thus slowing the overall process.

You can assess the amount of transaction overflow in your current workload at a specific point in time by using the `aurora_stat_file` function as shown in the following example.

```
SELECT split_part (filename, '/', 2)
   AS slot_name, count(1) AS num_spill_files,
   sum(used_bytes) AS slot_total_bytes,
   pg_size_pretty(sum(used_bytes)) AS slot_total_size
   FROM aurora_stat_file()
   WHERE filename like '%spill%'
   GROUP BY 1;
  slot_name | num_spill_files | slot_total_bytes | slot_total_size
------------+-----------------+------------------+-----------------
 slot_name  |       590       |      411600000   | 393 MB
(1 row)
```

This query returns the count and size of spill files on your Aurora PostgreSQL DB cluster when the query is invoked. Longer running workloads might not have any spill files on disk yet. To profile long-running workloads, we recommend that you create a table to capture the spill file information as the workload runs. You can create the table as follows.

```
CREATE TABLE spill_file_tracking AS
```

```
    SELECT now() AS spill_time,*
    FROM aurora_stat_file()
    WHERE filename LIKE '%spill%';
```

To see how spill files are used during logical replication, set up a publisher and subscriber and then start a simple replication. For more information, see Setting up logical replication for your Aurora PostgreSQL DB cluster. With replication under way, you can create a job that captures the result set from the `aurora_stat_file()` spill file function, as follows.

```
INSERT INTO spill_file_tracking
  SELECT now(),*
  FROM aurora_stat_file()
  WHERE filename LIKE '%spill%';
```

Use the following psql command to run the job once per second.

```
\watch 0.5
```

As the job is running, connect to the writer instance from another psql session. Use the following series of statements to run a workload that exceeds the memory configuration and causes Aurora PostgreSQL to create a spill file.

```
labdb=> CREATE TABLE my_table (a int PRIMARY KEY, b int);
CREATE TABLE
labdb=> INSERT INTO my_table SELECT x,x FROM generate_series(0,10000000) x;
INSERT 0 10000001
labdb=> UPDATE my_table SET b=b+1;
UPDATE 10000001
```

These statements take several minutes to complete. When finished, press the Ctrl key and the C key together to stop the monitoring function. Then use the following command to create a table to hold the information about the Aurora PostgreSQL DB cluster's spill file usage.

```
SELECT spill_time, split_part (filename, '/', 2)
    AS slot_name, count(1)
    AS spills, sum(used_bytes)
    AS slot_total_bytes, pg_size_pretty(sum(used_bytes))
    AS slot_total_size FROM spill_file_tracking
  GROUP BY 1,2 ORDER BY 1;
```

```
                   spill_time | slot_name             | spills | slot_total_bytes |
 slot_total_size
------------------------------+----------------------+--------+------------------
+-----------------
2022-04-15 13:42:52.528272+00 | replication_slot_name | 1      | 142352280        | 136
 MB
2022-04-15 14:11:33.962216+00 | replication_slot_name | 4      | 467637996        | 446
 MB
2022-04-15 14:12:00.997636+00 | replication_slot_name | 4      | 569409176        | 543
 MB
2022-04-15 14:12:03.030245+00 | replication_slot_name | 4      | 569409176        | 543
 MB
2022-04-15 14:12:05.059761+00 | replication_slot_name | 5      | 618410996        | 590
 MB
2022-04-15 14:12:07.22905+00  | replication_slot_name | 5      | 640585316        | 611
 MB
(6 rows)
```

The output shows that running the example created five spill files that used 611 MB of memory. To avoid writing to disk, we recommend setting the `logical_decoding_work_mem` parameter to the next highest memory size, 1024.

Using Amazon CloudWatch metrics to analyze resource usage for Aurora PostgreSQL

Aurora automatically sends metric data to CloudWatch in 1-minute periods. You can analyze resource usage for Aurora PostgreSQL using CloudWatch metrics. You can evaluate the network throughput and the network usage with the metrics.

Evaluating network throughput with CloudWatch

When your system usage approaches the resource limits for your instance type, the processing can slow down. You can use CloudWatch **Logs Insights** to monitor your storage resource usage and ensure that sufficient resources are available. When needed, you can modify the DB instance to a larger instance class.

Aurora storage processing may be slow because of:


- Insufficient network bandwidth between the client and DB instance.
- Insufficient network bandwidth to the storage subsystem.

- A workload that is large for your instance type.

You can query CloudWatch **Logs Insights** to generate a graph of Aurora storage resource usage to monitor the resources. The graph shows the CPU utilization and metrics to help you decide whether to scale up to a larger instance size. For information about the query syntax for CloudWatch **Logs Insights**, see CloudWatch Logs Insights query syntax

To use CloudWatch, you need to export your Aurora PostgreSQL log files to CloudWatch. You can also modify your existing cluster to export logs to CloudWatch. For information about exporting logs to CloudWatch, see Turning on the option to publish logs to Amazon CloudWatch.

You need the **Resource ID** of your DB instance to query the CloudWatch **Logs Insights**. The **Resource ID** is available in the **Configuration** tab in your console:

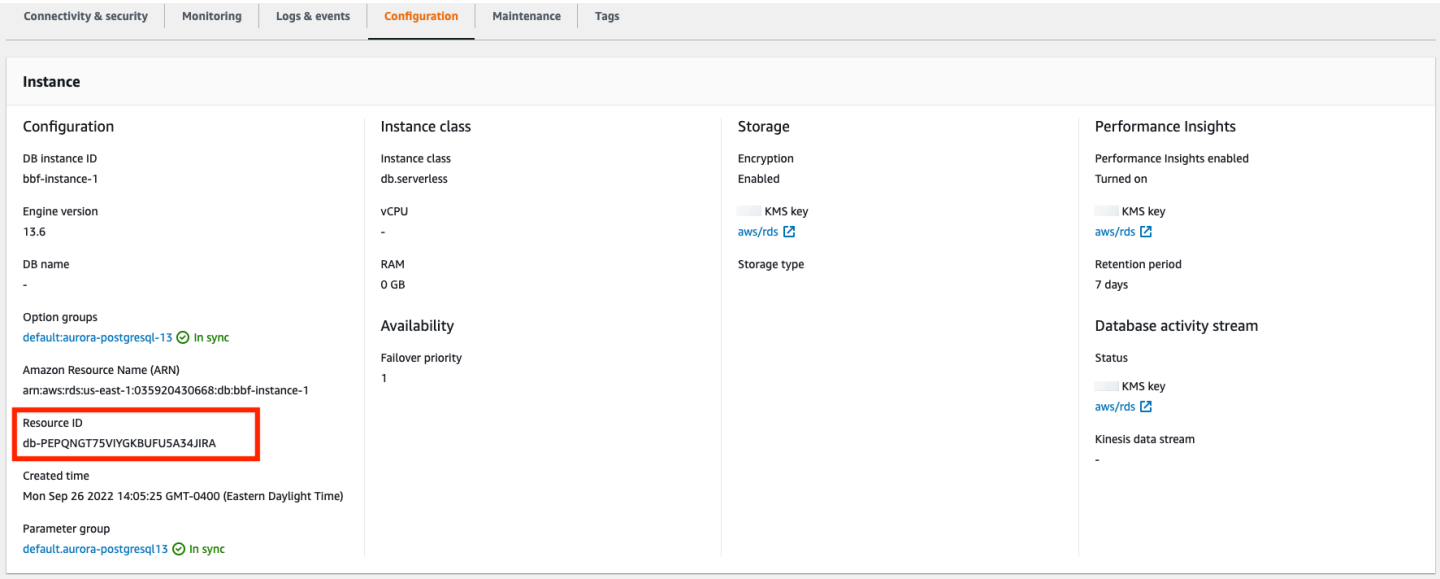

To query your log files for resource storage metrics:

1. Open the CloudWatch console at https://console.amazonaws.cn/cloudwatch/.

   The CloudWatch overview home page appears.

2. If necessary, change the Amazon Web Services Region. In the navigation bar, choose the Amazon Web Services Region where your Amazon resources are located. For more information, see Regions and endpoints.

3. In the navigation pane, choose **Logs** and then **Logs Insights**.

   The **Logs Insights** page appears.


4. Select the log files from the drop-down list to analyze.
5. Enter the following query in the field, replacing `<resource ID>` with the resource ID of your DB cluster:

   ```
   filter @logStream = <resource ID> | parse @message "\"Aurora Storage Daemon\"*memoryUsedPc\":*,\"cpuUsedPc\":*," as a,memoryUsedPc,cpuUsedPc | display memoryUsedPc,cpuUsedPc #| stats avg(xcpu) as avgCpu by bin(5m) | limit 10000
   ```

6. Choose **Run query**.

   The storage utilization graph is displayed.

   The following image provides the **Logs Insights** page and the graph display.

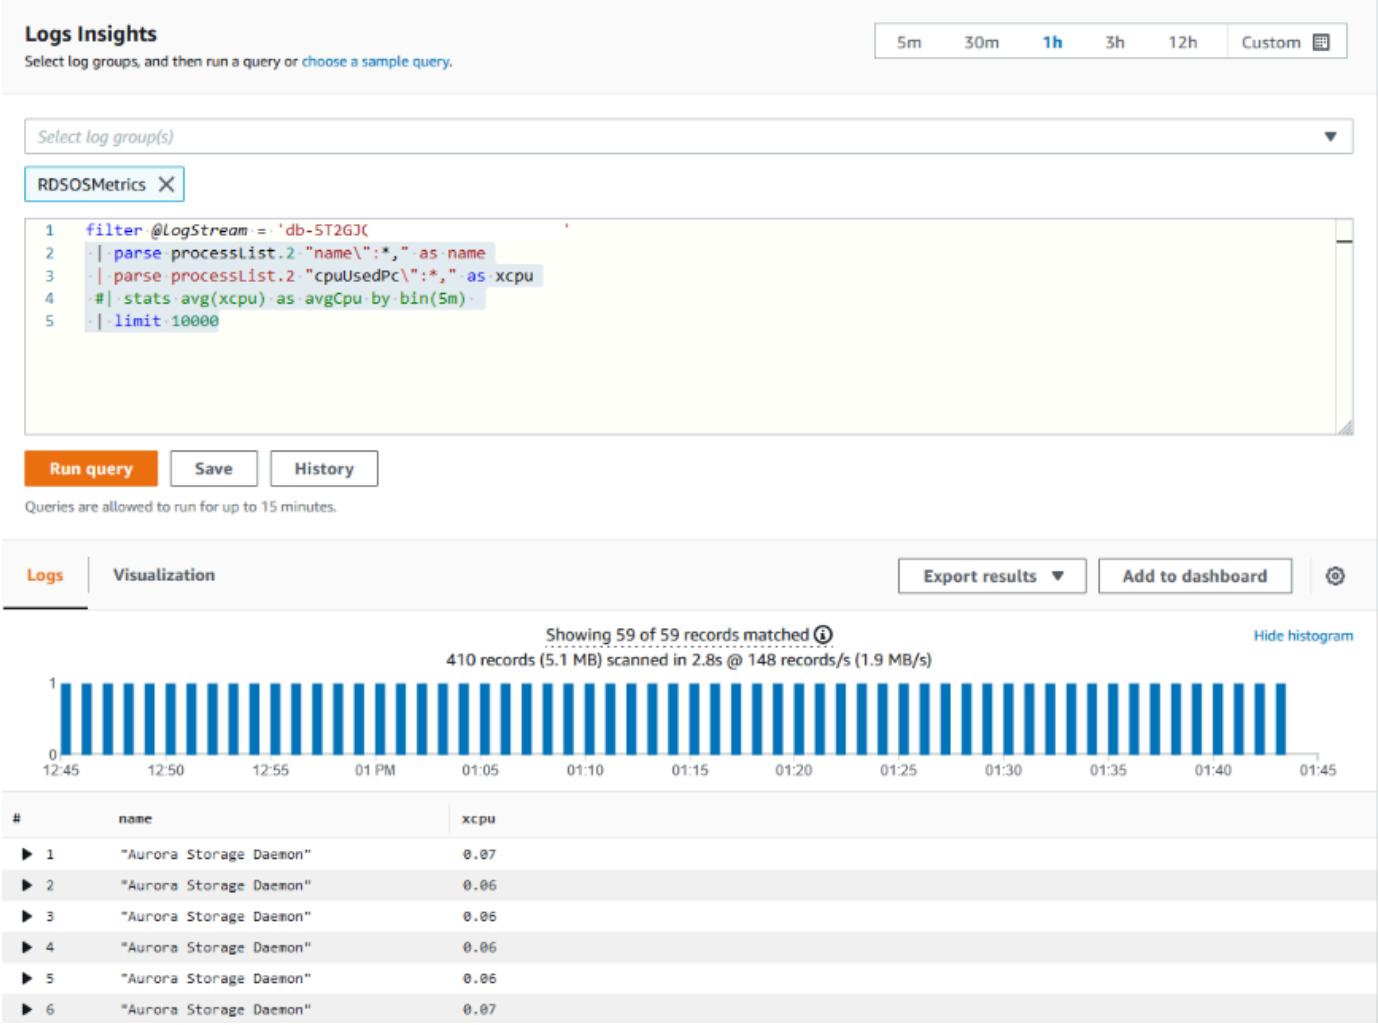

Evaluating DB instance usage for Aurora PostgreSQL with CloudWatch metrics

You can use CloudWatch metrics to watch your instance throughput and discover if your instance class provides sufficient resources for your applications. For information about your DB instance class limits, go to Hardware specifications for DB instance classes for Aurora and locate the specifications for your DB instance class to find your network performance.

If your DB instance usage is near the instance class limit, then performance may begin to slow. The CloudWatch metrics can confirm this situation so you can plan to manually scale-up to a larger instance class.

Combine the following CloudWatch metrics values to find out if you are nearing the instance class limit:

- **NetworkThroughput** – The amount of network throughput received and transmitted by the clients for each instance in the Aurora DB cluster. This throughput value doesn't include network traffic between instances in the DB cluster and the cluster volume.
- **StorageNetworkThroughput** – The amount of network throughput received and sent to the Aurora storage subsystem by each instance in the Aurora DB cluster.

Add the **NetworkThroughput** to the **StorageNetworkThroughput** to find the network throughput received from and sent to the Aurora storage subsystem by each instance in your Aurora DB cluster. The instance class limit for your instance should be greater than the sum of these two combined metrics.

You can use the following metrics to review additional details of the network traffic from your client applications when sending and receiving:

- **NetworkReceiveThroughput** – The amount of network throughput received from clients by each instance in the Aurora PostgreSQL DB cluster. This throughput doesn't include network traffic between instances in the DB cluster and the cluster volume.
- **NetworkTransmitThroughput** – The amount of network throughput sent to clients by each instance in the Aurora DB cluster. This throughput doesn't include network traffic between instances in the DB cluster and the cluster volume.
- **StorageNetworkReceiveThroughput** – The amount of network throughput received from the Aurora storage subsystem by each instance in the DB cluster.
- **StorageNetworkTransmitThroughput** – The amount of network throughput sent to the Aurora storage subsystem by each instance in the DB cluster.

Add all of these metrics together to evaluate how your network usage compares to the instance class limit. The instance class limit should be greater than the sum of these combined metrics.

The network limits and CPU utilization for storage are mutual. When the network throughput increases, then the CPU utilization also increases. Monitoring the CPU and network usage provides information about how and why the resources are being exhausted.

To help minimize network usage, you can consider:

- Using a larger instance class.
- Using `pg_partman` partitioning strategies.
- Dividing the write requests in batches to reduce overall transactions.
- Directing the read-only workload to a read-only instance.
- Deleting any unused indexes.
- Checking for bloated objects and VACUUM. In the case of severe bloat, use the PostgreSQL extension `pg_repack`. For more information about `pg_repack`, see Reorganize tables in PostgreSQL databases with minimal locks.

Using logical replication to perform a major version upgrade for Aurora PostgreSQL

Using logical replication and Aurora fast cloning, you can perform a major version upgrade that uses the current version of Aurora PostgreSQL database while gradually migrating the changing data to the new major version database. This low downtime upgrade process is referred to as a blue/green upgrade. The current version of the database is referred as the "blue" environment and the new database version is referred as the "green" environment.

Aurora fast cloning fully loads the existing data by taking a snapshot of the source database. Fast cloning uses a copy-on-write protocol built on top of the Aurora storage layer, which allows you to create a clone of database in a short time. This method is very effective when upgrading to a large database.

Logical replication in PostgreSQL tracks and transfers your data changes from initial instance to a new instance running in parallel until you move to the newer version of PostgreSQL. Logical replication uses a publish and subscribe model. For more information about Aurora PostgreSQL logical replication, see Replication with Amazon Aurora PostgreSQL.

Tip

You can minimize the downtime required for a major version upgrade by using the managed Amazon RDS Blue/Green Deployment feature. For more information, see Using Amazon Aurora Blue/Green Deployments for database updates.

Topics

- Requirements
- Limitations
- Setting and checking parameter values
- Upgrading Aurora PostgreSQL to a new major version
- Performing post-upgrade tasks

Requirements

You must meet the following requirements to perform this low downtime upgrade process:

- You must have rds_superuser permissions.
- The Aurora PostgreSQL DB cluster you intend to upgrade must be running a supported version that can perform major version upgrades using logical replication. Make sure to apply any minor version updates and patches to your DB cluster. The `aurora_volume_logical_start_lsn` function that is used in this technique is supported in the following versions of Aurora PostgreSQL:
  - 15.2 and higher 15 versions
  - 14.3 and higher 14 versions
  - 13.6 and higher 13 versions
  - 12.10 and higher 12 versions
  - 11.15 and higher 11 versions
  - 10.20 and higher 10 versions

  For more information on `aurora_volume_logical_start_lsn` function, see aurora_volume_logical_start_lsn.
- All of your tables must have a primary key or include a PostgreSQL identity column.

- Configure the security group for your VPC to allow inbound and outbound access between the two Aurora PostgreSQL DB clusters, both old and new. You can grant access to a specific classless inter-domain routing (CIDR) range or to another security group in your VPC or in a peer VPC. (Peer VPC requires a VPC peering connection.)

> **Note**
>
> For detailed information about the permissions required to configure and manage a running logical replication scenario, see the PostgreSQL core documentation.

Limitations

When you are performing low downtime upgrade on your Aurora PostgreSQL DB cluster to upgrade it to a new major version, you are using the native PostgreSQL logical replication feature. It has the same capabilities and limitations as the PostgreSQL logical replication. For more information, see PostgreSQL logical replication.

- Data definition language (DDL) commands are not replicated.
- Replication doesn't support schema changes in a live database. The schema is recreated in its original form during the cloning process. If you change the schema after cloning, but before completing the upgrade, it isn't reflected in the upgraded instance.
- Large objects are not replicated, but you can store data in normal tables.
- Replication is only supported by tables, including partitioned tables. Replication to other types of relations, such as views, materialized views, or foreign tables, is not supported.
- Sequence data is not replicated and requires a manual update post-failover.

> **Note**
>
> This upgrade doesn't support auto-scripting. You should perform all the steps manually.

Setting and checking parameter values

Before upgrading, configure the writer instance of your Aurora PostgreSQL DB cluster to act as a publication server. The instance should use a custom DB cluster parameter group with the following settings:

- `rds.logical_replication` – Set this parameter to 1. The `rds.logical_replication` parameter serves the same purpose as a standalone PostgreSQL server's `wal_level` parameter and other parameters that control the write-ahead log file management.
- `max_replication_slots` – Set this parameter to the total number of subscriptions that you plan to create. If you are using Amazon DMS, set this parameter to the number of Amazon DMS tasks that you plan to use for changed data capture from this DB cluster.
- `max_wal_senders` – Set to the number of concurrent connections, plus a few extra, to make available for management tasks and new sessions. If you are using Amazon DMS, the number of max_wal_senders should be equal to the number of concurrent sessions plus the number of Amazon DMS tasks that may be working at any given time.
- `max_logical_replication_workers` – Set to the number of logical replication workers and table synchronization workers that you expect. It's generally safe to set the number of replication workers to the same value used for max_wal_senders. The workers are taken from the pool of background processes (max_worker_processes) allocated for the server.
- `max_worker_processes` – Set to the number of background processes for the server. This number should be large enough to allocate workers for replication, auto-vacuum processes, and other maintenance processes that may take place concurrently.

When you upgrade to a newer version of Aurora PostgreSQL, you need to duplicate any parameters that you modified in the earlier version of the parameter group. These parameters are applied to the upgraded version. You can query the `pg_settings` table to get a list of parameter settings so that you can re-create them on your new Aurora PostgreSQL DB cluster.

For example, to get the settings for replication parameters, run the following query:

```
SELECT name, setting FROM pg_settings WHERE name in
('rds.logical_replication', 'max_replication_slots',
'max_wal_senders', 'max_logical_replication_workers',
'max_worker_processes');
```

Upgrading Aurora PostgreSQL to a new major version

To prepare the publisher (blue)

1. In the example that follows, the source writer instance (blue) is an Aurora PostgreSQL DB cluster running PostgreSQL version 11.15. This is the publication node in our replication scenario. For this demonstration, our source writer instance hosts a sample table that holds a series of values:

```
CREATE TABLE my_table (a int PRIMARY KEY);
INSERT INTO my_table VALUES (generate_series(1,100));
```

2. To create a publication on the source instance, connect to the writer node of the instance with psql (the CLI for PostgreSQL) or with the client of your choice). Enter the following command in each database:

```
CREATE PUBLICATION publication_name FOR ALL TABLES;
```


   The publication_name specifies the name of the publication.

3. You also need to create a replication slot on the instance. The following command creates a replication slot and loads the `pgoutput` logical decoding plug-in. The plug-in changes content read from write-ahead logging (WAL) to the logical replication protocol, and filters the data according to the publication specification.


```
SELECT pg_create_logical_replication_slot('replication_slot_name', 'pgoutput');
```

To clone the publisher

1. Use the Amazon RDS Console to create a clone of the source instance. Highlight the instance name in the Amazon RDS Console, and then choose **Create clone** in the **Actions** menu.

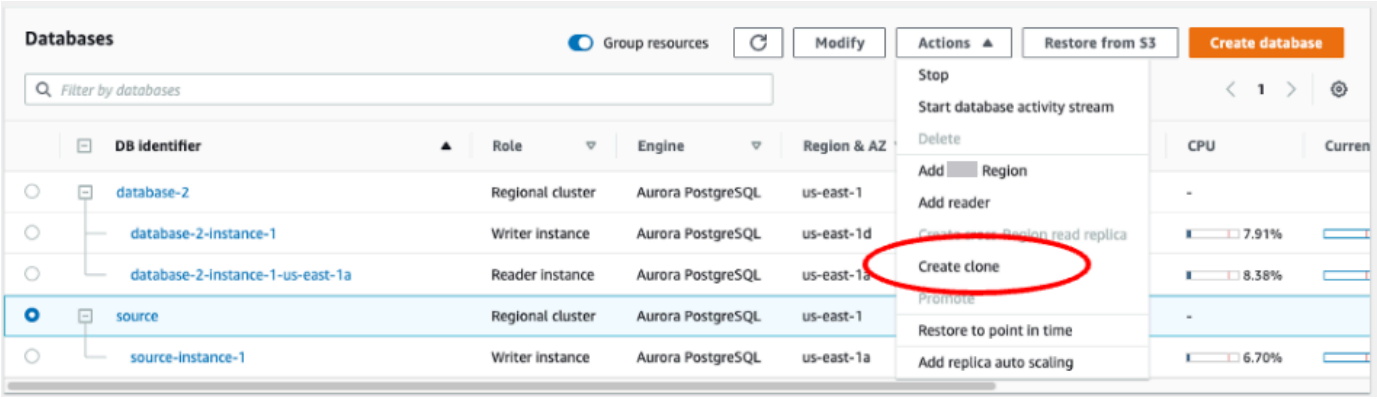

2. Provide a unique name for the instance. Most of the settings are defaults from the source instance. When you've made changes required for the new instance, choose **Create clone**.

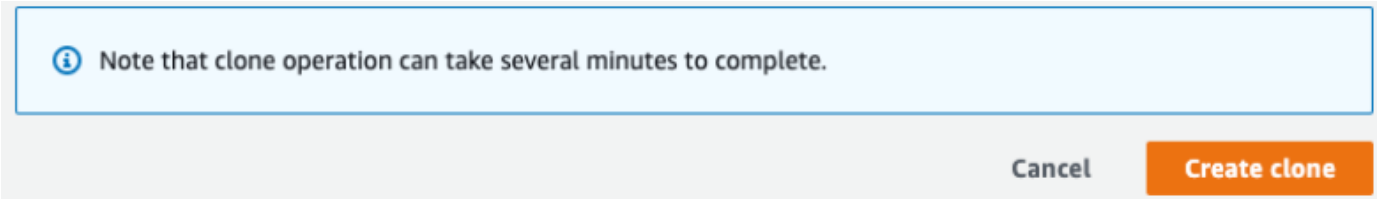

3. While the target instance is initiating, the **Status** column of the writer node displays Creating in the **Status** column. When the instance is ready, the status changes to Available.

To prepare the clone for an upgrade

1. The clone is the 'green' instance in the deployment model. It is the host of the replication subscription node. When the node becomes available, connect with psql and query the new writer node to obtain the log sequence number (LSN). The LSN identifies the beginning of a record in the WAL stream.

```
SELECT aurora_volume_logical_start_lsn();
```

2. In the response from the query, you find the LSN number. You need this number later in the process, so make a note of it.


```
postgres=> SELECT aurora_volume_logical_start_lsn();
aurora_volume_logical_start_lsn
---------------
0/402E2F0
(1 row)
```

3. Before upgrading the clone, drop the clone's replication slot.

```
SELECT pg_drop_replication_slot('replication_slot_name');
```

To upgrade the cluster to a new major version

- After cloning the provider node, use the Amazon RDS Console to initiate a major version upgrade on the subscription node. Highlight the instance name in the RDS console, and select the **Modify** button. Select the updated version and your updated parameter groups, and apply the settings immediately to upgrade the target instance.

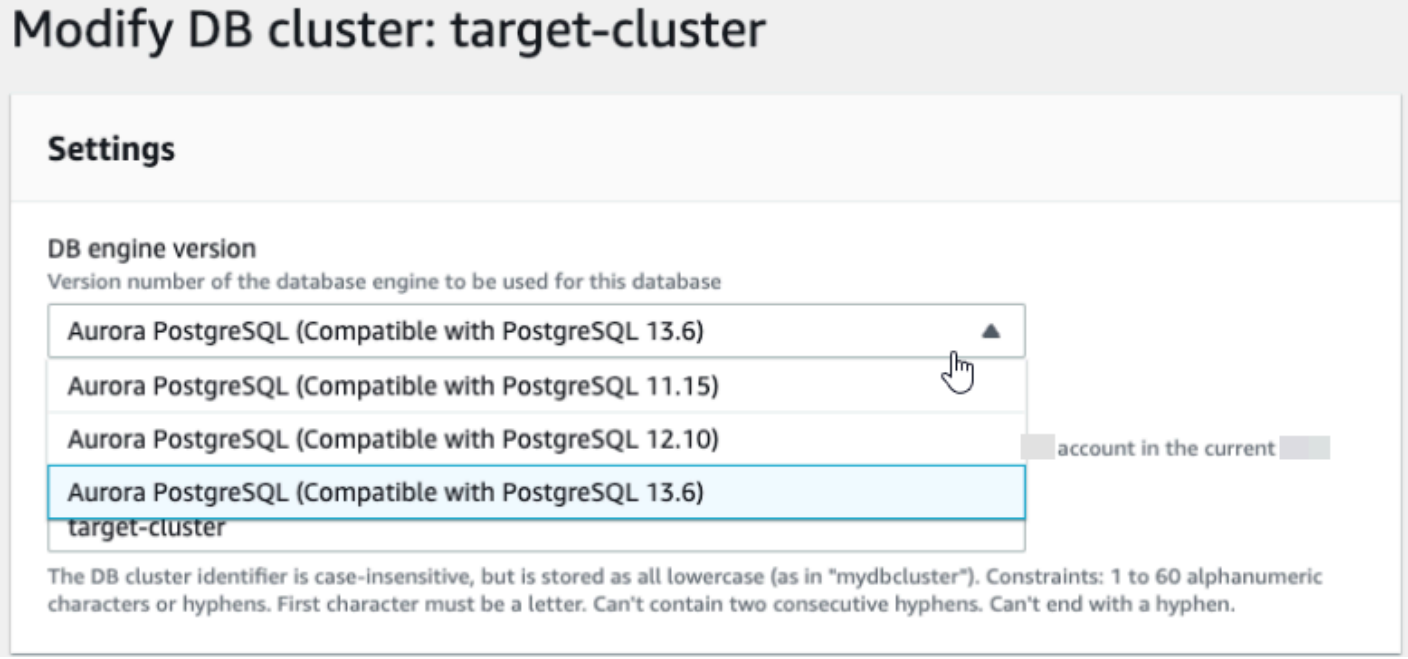

- You can also use the CLI to perform an upgrade:

```
aws rds modify-db-cluster –db-cluster-identifier $TARGET_Aurora_ID –engine-version
 13.6 –allow-major-version-upgrade –apply-immediately
```

To prepare the subscriber (green)

1. When the clone becomes available after the upgrade, connect with psql and define the subscription. To do so, you need to specify the following options in the `CREATE SUBSCRIPTION` command:

   - `subscription_name` – The name of the subscription.
   - `admin_user_name` – The name of an administrative user with rds_superuser permissions.

- admin_user_password – The password associated with the administrative user.
- source_instance_URL – The URL of the publication server instance.
- database – The database that the subscription server will connect with.
- publication_name – The name of the publication server.
- replication_slot_name – The name of the replication slot.

```
CREATE SUBSCRIPTION subscription_name
CONNECTION 'postgres://admin_user_name:admin_user_password@source_instance_URL/
database' PUBLICATION publication_name
WITH (copy_data = false, create_slot = false, enabled = false, connect = true,
 slot_name = 'replication_slot_name');
```

2. After creating the subscription, query the pg_replication_origin view to retrieve the roname value, which is the identifier of the replication origin. Each instance has one roname:

```
SELECT * FROM pg_replication_origin;
```

For example:

```
postgres=>
SELECT * FROM pg_replication_origin;

roident | roname
---------+----------
1 | pg_24586
```

3. Provide the LSN that you saved from the earlier query of the publication node and the roname returned from the subscription node [INSTANCE] in the command. This command uses the pg_replication_origin_advance function to specify the starting point in the log sequence for replication.

```
SELECT pg_replication_origin_advance('roname', 'log_sequence_number');
```

roname is the identifier returned by the pg_replication_origin view.

log_sequence_number is the value returned by the earlier query of the aurora_volume_logical_start_lsn function.

4. Then, use the `ALTER SUBSCRIPTION... ENABLE` clause to turn on logical replication.

```
ALTER SUBSCRIPTION subscription_name ENABLE;
```

5. At this point, you can confirm that replication is working. Add a value to the publication instance, then confirm that the value is replicated to the subscription node.

   Then, use the following command to monitor replication lag on the publication node:

```
SELECT now() AS CURRENT_TIME, slot_name, active, active_pid,
 pg_size_pretty(pg_wal_lsn_diff(pg_current_wal_lsn(),
confirmed_flush_lsn)) AS diff_size, pg_wal_lsn_diff(pg_current_wal_lsn(),
confirmed_flush_lsn) AS diff_bytes FROM pg_replication_slots WHERE slot_type =
 'logical';
```

   For example:

```
postgres=> SELECT now() AS CURRENT_TIME, slot_name, active, active_pid,
 pg_size_pretty(pg_wal_lsn_diff(pg_current_wal_lsn(),
confirmed_flush_lsn)) AS diff_size, pg_wal_lsn_diff(pg_current_wal_lsn(),
 confirmed_flush_lsn) AS diff_bytes FROM pg_replication_slots WHERE slot_type =
 'logical';

current_time                   | slot_name             | active | active_pid |
 diff_size | diff_bytes
-------------------------------+-----------------------+--------+------------
+-----------+------------
2022-04-13 15:11:00.243401+00  | replication_slot_name | t      | 21854      | 136
 bytes | 136
(1 row)
```

   You can monitor the replication lag using `diff_size` and `diff_bytes` values. When these values reach 0, the replica has caught up to the source DB instance.

Performing post-upgrade tasks

When the upgrade is complete, the instance status displays as **Available** in the **Status** column of the console dashboard. On the new instance, we recommend you do the following:

- Redirect your applications to point to the writer node.

- Add reader nodes to manage the caseload and provide high-availability in the event of an issue with the writer node.
- Aurora PostgreSQL DB clusters occasionally require operating system updates. These updates might include a newer version of glibc library. During such updates, we recommend you to follow the guidelines as described in Collations supported in Aurora PostgreSQL .
- Update user permissions on the new instance to ensure access.

After testing your application and data on the new instance, we recommend that you make a final backup of your initial instance before removing it. For more information about using logical replication on an Aurora host, see Setting up logical replication for your Aurora PostgreSQL DB cluster.

Managing custom casts in Aurora PostgreSQL

Type casting in PostgreSQL is the process of converting a value from one data type to another. PostgreSQL provides built-in casts for many common conversions, but you can also create custom casts to define how specific type conversions should behave.

A cast specifies how to perform a conversion from one data type to another. For example, converting text `'123'` to integer 123, or numeric `45.67` to text `'45.67'`.

For comprehensive information about PostgreSQL casting concepts and syntax, refer to the PostgreSQL CREATE CAST Documentation.

Starting with Aurora PostgreSQL versions 13.23, 14.20, 15.15, 16.11, 17.7, and 18.1, you can use the rds_casts extension to install additional casts for built-in types, while still being able to create your own casts for custom types.

Topics

- Installing and using the rds_casts extension
- Supported casts
- Creating or dropping casts
- Creating custom casts with proper context strategy

Installing and using the rds_casts extension

To create the `rds_casts` extension, connect to the writer instance of your Aurora PostgreSQL DB cluster as an `rds_superuser` and run the following command:

```
CREATE EXTENSION IF NOT EXISTS rds_casts;
```

Supported casts

Create the extension in each database where you want to use custom casts. After creating the extension, use the following command to view all available casts:

```
SELECT * FROM rds_casts.list_supported_casts();
```

This function lists the available cast combinations (source type, target type, coercion context, and cast function). For example, if you want to create `text` to `numeric` as an `implicit` cast. You can use the following query to find if the cast is available to create:

```
SELECT * FROM rds_casts.list_supported_casts()
WHERE source_type = 'text' AND target_type = 'numeric';
 id | source_type | target_type |          qualified_function          |
 coercion_context
----+-------------+-------------+--------------------------------------
+------------------
 10 | text        | numeric     | rds_casts.rds_text_to_numeric_custom | implicit
 11 | text        | numeric     | rds_casts.rds_text_to_numeric_custom | assignment
 13 | text        | numeric     | rds_casts.rds_text_to_numeric_custom | explicit
 20 | text        | numeric     | rds_casts.rds_text_to_numeric_inout  | implicit
 21 | text        | numeric     | rds_casts.rds_text_to_numeric_inout  | assignment
 23 | text        | numeric     | rds_casts.rds_text_to_numeric_inout  | explicit
```

The rds_casts extension provides two types of conversion functions for each cast:

- *_inout functions* - Use PostgreSQL's standard I/O conversion mechanism, behaving identically to casts created with the INOUT method
- *_custom functions* - Provide enhanced conversion logic that handles edge cases, such as converting empty strings to NULL values to avoid conversion errors

The `inout` functions replicate PostgreSQL's native casting behavior, while `custom` functions extend this functionality by handling scenarios that standard INOUT casts cannot accommodate, such as converting empty strings to integers.

Creating or dropping casts

You can create and drop supported casts using two methods:

Cast creation

Method 1: Using native CREATE CAST command

```
CREATE CAST (text AS numeric)
WITH FUNCTION rds_casts.rds_text_to_numeric_custom
AS IMPLICIT;
```

Method 2: Using the rds_casts.create_cast function

```
SELECT rds_casts.create_cast(10);
```

The `create_cast` function takes the ID from the `list_supported_casts()` output. This method is simpler and ensures you're using the correct function and context combination. This id is guaranteed to remain the same across different postgres versions.

To verify the cast was created successfully, query the pg_cast system catalog:

```
SELECT oid, castsource::regtype, casttarget::regtype, castfunc::regproc, castcontext,
 castmethod
FROM pg_cast
WHERE castsource = 'text'::regtype AND casttarget = 'numeric'::regtype;
  oid   | castsource | casttarget |              castfunc               | castcontext
 | castmethod
--------+------------+------------+-------------------------------------+-------------
+------------
 356372 | text       | numeric    | rds_casts.rds_text_to_numeric_custom | i
 | f
```

The `castcontext` column shows: `e` for EXPLICIT, `a` for ASSIGNMENT, or `i` for IMPLICIT.

Dropping casts

Method 1: Using DROP CAST command

```
DROP CAST IF EXISTS (text AS numeric);
```

Method 2: Using the rds_casts.drop_cast function

```
SELECT rds_casts.drop_cast(10);
```

The `drop_cast` function takes the same ID used when creating the cast. This method ensures you're dropping the exact cast that was created with the corresponding ID.

Creating custom casts with proper context strategy

When creating multiple casts for integer types, operator ambiguity errors can occur if all casts are created as IMPLICIT. The following example demonstrates this issue by creating two implicit casts from text to different integer widths:

```
-- Creating multiple IMPLICIT casts causes ambiguity
postgres=> CREATE CAST (text AS int4) WITH FUNCTION
 rds_casts.rds_text_to_int4_custom(text) AS IMPLICIT;
CREATE CAST
postgres=> CREATE CAST (text AS int8) WITH FUNCTION
 rds_casts.rds_text_to_int8_custom(text) AS IMPLICIT;
CREATE CAST

postgres=> CREATE TABLE test_cast(col int);
CREATE TABLE
postgres=> INSERT INTO test_cast VALUES ('123'::text);
INSERT 0 1
postgres=> SELECT * FROM test_cast WHERE col='123'::text;
ERROR:  operator is not unique: integer = text
LINE 1: SELECT * FROM test_cast WHERE col='123'::text;
                                         ^
HINT:  Could not choose a best candidate operator. You might need to add explicit type
 casts.
```

The error occurs because PostgreSQL cannot determine which implicit cast to use when comparing an integer column with a text value. Both the int4 and int8 implicit casts are valid candidates, creating ambiguity.

To avoid this operator ambiguity, use ASSIGNMENT context for smaller integer widths and IMPLICIT context for larger integer widths:

```
-- Use ASSIGNMENT for smaller integer widths
CREATE CAST (text AS int2)
WITH FUNCTION rds_casts.rds_text_to_int2_custom(text)
AS ASSIGNMENT;

CREATE CAST (text AS int4)
WITH FUNCTION rds_casts.rds_text_to_int4_custom(text)
AS ASSIGNMENT;

-- Use IMPLICIT for larger integer widths
CREATE CAST (text AS int8)
WITH FUNCTION rds_casts.rds_text_to_int8_custom(text)
AS IMPLICIT;

postgres=> INSERT INTO test_cast VALUES ('123'::text);
INSERT 0 1
postgres=> SELECT * FROM test_cast WHERE col='123'::text;
 col
-----
 123
(1 row)
```

With this strategy, only the int8 cast is implicit, so PostgreSQL can unambiguously determine which cast to use.

Best Practices for Parallel Queries in Aurora PostgreSQL

Parallel query execution is a feature in PostgreSQL that allows a single SQL query to be broken into smaller tasks that are processed simultaneously by multiple background worker processes. Instead of executing a query entirely in a single backend process, PostgreSQL can distribute parts of the query, such as scans, joins, aggregations, or sorting, across multiple CPU cores. The *leader process* coordinates this execution and gathers the results from the *parallel workers*.

However, for most production workloads, especially high-concurrency OLTP systems, we recommend disabling automatic parallel query execution. While parallelism can accelerate queries on large datasets in analytics or reporting workloads, it introduces significant risks that often outweigh the benefits in busy production environments.

Parallel execution also introduces significant overhead. Each parallel worker is a full PostgreSQL backend process, which requires process forking (copying memory structures and initializing process state) and authentication (consuming connection slots from your `max_connections`

limit). Each worker also consumes its own memory, including `work_mem` for sorting and hashing operations, with multiple workers per query, memory usage multiplies quickly (for example, 4 workers × 64MB `work_mem` = 256MB per query). As a result, parallel queries can consume considerably more system resources than single-process queries. If not tuned properly, they may lead to CPU saturation (multiple workers overwhelming available processing capacity), increased context switching (the operating system frequently switching between numerous worker processes, adding overhead and reducing throughput), or connection exhaustion (since each parallel worker consumes a connection slot, a single query with 4 workers uses 5 connections total, 1 leader + 4 workers, which can quickly exhaust your connection pool under high concurrency, preventing new client connections and causing application failures). These issues are particularly severe under high-concurrency workloads where multiple queries may attempt parallel execution simultaneously.

PostgreSQL decides whether to use parallelism based on cost estimates. In some cases, the planner may automatically switch to a parallel plan if it appears cheaper even when it's not ideal in practice. This can happen if index statistics are outdated or if bloat makes sequential scans appear more attractive than index lookups. Because of this behavior, automatic parallel plans can sometimes introduce regressions in query performance or system stability.

To get the most benefit from parallel queries in Aurora PostgreSQL, it's important to test and tune them based on your workload, monitor system impact, and disable automatic parallel plan selection in favor of query-level control.

Configuration Parameters

PostgreSQL uses several parameters to control the behavior and availability of parallel queries. Understanding and tuning these is critical to achieving predictable performance:

Parameter	Description	Default
`max_parallel_workers`	Maximum number of background worker processes that can run in total	GREATEST($DBInstanceVCPU/2,8)
`max_parallel_workers_per_gather`	Maximum number of workers per query plan node (for example, per `Gather`)	2 for Aurora PostgreSQL 17 and earlier versions. 0 for Aurora PostgreSQL 18 and later versions.

Parameter	Description	Default
`parallel_setup_cost`	Planner cost added for initiating parallel query infrastructure	1000
`parallel_tuple_cost`	Cost per tuple processed in parallel mode (impacts planner decision)	0.1
`force_parallel_mode`	Forces planner to test parallel plans (`off`, on, `regress`)	`off`

Key Considerations

- `max_parallel_workers` controls the total pool of parallel workers. If set too low, some queries may fall back to serial execution.
- `max_parallel_workers_per_gather` affects how many workers a single query can use. A higher value increases concurrency, but also resource usage.
- `parallel_setup_cost` and `parallel_tuple_cost` affect the planner's cost model. Lowering these can make parallel plans more likely to be chosen.
- `force_parallel_mode` is useful for testing but should not be used in production unless necessary.

> **Note**
>
> The default value of the `max_parallel_workers` parameter is dynamically calculated based on instance size using the formula `GREATEST($DBInstanceVCPU/2, 8)`. This means that when you scale your Aurora instance to a larger compute size with more vCPUs, the maximum number of available parallel workers will automatically increase. As a result, queries that previously executed serially or with limited parallelism may suddenly utilize more parallel workers after a scale-up operation, potentially leading to unexpected increases in connection usage, CPU utilization, and memory consumption. It's important to monitor parallel query behavior after any compute scaling event and adjust

`max_parallel_workers_per_gather` if necessary to maintain predictable resource usage.

Identify Parallel Queries Usage

Queries may flip to parallel plans based on data distribution or statistics. For example:

```
SELECT count(*) FROM customers WHERE last_login < now() - interval '6 months';
```

This query might use an index for recent data, but switch to a parallel sequential scan for historical data.

You can log query execution plans by loading the `auto_explain` module. To learn more, see Logging execution plans of queries in the Amazon knowledge center.

You can monitor query execution plans in your Aurora PostgreSQL DB instance to detect the execution plans contributing to current database load and to track performance statistics of execution plans over time using the `aurora_compute_plan_id` parameter. To learn more, see Monitoring query execution plans and peak memory for Aurora PostgreSQL

You can monitor CloudWatch Database Insights for Parallel Query related wait events. To learn more about Parallel Query related wait events, go through IPC:parallel wait events

From PostgreSQL version 18, you can monitor parallel worker activity using new columns in `pg_stat_database` and `pg_stat_statements`:

- `parallel_workers_to_launch`: Number of parallel workers planned to be launched
- `parallel_workers_launched`: Number of parallel workers actually launched

These metrics help identify discrepancies between planned and actual parallelism, which can indicate resource constraints or configuration issues. Use the following queries to monitor parallel execution:

For Database-level parallel worker metrics:

```
SELECT datname, parallel_workers_to_launch, parallel_workers_launched
FROM pg_stat_database
```

```
WHERE datname = current_database();
```

For Query-level parallel worker metrics

```
SELECT query, parallel_workers_to_launch, parallel_workers_launched
FROM pg_stat_statements
ORDER BY parallel_workers_launched;
```

How to Control Parallelism

There are several ways to control query parallelism, each designed for different scenarios and requirements.

To disable automatic parallelism globally, modify your parameter group to set:

```
max_parallel_workers_per_gather = 0;
```

For persistent, user-specific settings, the ALTER ROLE command provides a way to set parameters that will apply to all future sessions for a particular user.

For example:

`ALTER ROLE username SET max_parallel_workers_per_gather = 4;` ensures that every time this user connects to the database, their sessions will use this parallel worker setting when required.

Session-level control can be achieved using the SET command, which modifies parameters for the duration of the current database session. This is particularly useful when you need to temporarily adjust settings without affecting other users or future sessions. Once set, these parameters remain in effect until explicitly reset or until the session ends. The commands are straightforward:

```
SET max_parallel_workers_per_gather = 4;
-- Run your queries
RESET max_parallel_workers_per_gather;
```

For even more granular control, SET LOCAL allows you to modify parameters for a single transaction. This is ideal when you need to adjust settings for a specific set of queries within a transaction, after which the settings automatically revert to their previous values. This approach helps prevent unintended effects on other operations within the same session.

Utilize Query Plan Management (QPM)

In Aurora PostgreSQL, the Query Plan Management (QPM) feature is designed to ensure plan adaptability and stability, regardless of database environment changes that might cause query plan regression. For more information, see Overview of Aurora PostgreSQL query plan management. QPM provides some control over the optimizer. Review approved plans in QPM to ensure they align with current parallelism settings. Update or remove outdated plans that may be forcing suboptimal parallel execution.

You can also fix the plans using pg_hint_plan. For more information, see Fixing plans using pg_hint_plan. You can use the hint named `Parallel` to enforce parallel execution. For more information, see the Hints for parallel plans.

Diagnosing Parallel Query Behavior

Use `EXPLAIN (ANALYZE, VERBOSE)` to confirm whether a query used parallel execution:

- Look for nodes such as `Gather`, `Gather Merge`, or `Parallel Seq Scan`.
- Compare plans with and without parallelism.

To disable parallelism temporarily for comparison:

```
SET max_parallel_workers_per_gather = 0;
EXPLAIN ANALYZE <your_query>;
RESET max_parallel_workers_per_gather;
```

Avoiding performance issues with REPLICA IDENTITY FULL in Aurora PostgreSQL

PostgreSQL logical replication requires each published table to have a *replica identity* so that the subscriber can locate the correct row to update or delete. By default, the primary key serves as the replica identity. When a table has no primary key or suitable unique index, you can set the replica identity to `FULL`, which causes PostgreSQL to use the entire row as the key.

While `REPLICA IDENTITY FULL` solves the immediate problem of replicating tables without primary keys, it can introduce serious performance issues on both the publisher and subscriber. Understanding these impacts is important for anyone using logical replication with Aurora PostgreSQL, including features that rely on logical replication internally, such as blue/green deployments.

Why REPLICA IDENTITY FULL causes problems

Increased WAL volume on the publisher

The `REPLICA IDENTITY` setting controls what information PostgreSQL writes to the write-ahead log (WAL) to identify rows that are updated or deleted. With the default replica identity (primary key), only the key columns are logged as the old row identity. With `FULL`, PostgreSQL records the old values of *every* column for each `UPDATE` and `DELETE`. This has several consequences:

- **WAL size increases significantly.** For updates, the size of each WAL record roughly doubles because both old and new values for every column are recorded. If the table contains large values stored using TOAST, the increase can be much larger because TOASTed values must be fetched and written to the WAL even if they were not modified by the update.
- **Higher I/O and CPU usage on the publisher.** The additional WAL writes consume more disk I/O bandwidth and CPU cycles, especially for write-heavy workloads.
- **More data sent to subscribers.** The publisher must transmit larger WAL records over the network to each subscriber, increasing bandwidth consumption.

Slow row lookups on the subscriber

When the subscriber receives an `UPDATE` or `DELETE` log record, it must find the matching row in its local copy of the table. With `REPLICA IDENTITY FULL`, the subscriber searches for a row that matches *all* column values from the old row image.

How PostgreSQL performs this search differs by PostgreSQL major version:

- **Before PostgreSQL 16:** If the table has no primary key and no explicitly configured replica identity index, the subscriber performs a sequential scan of the entire table for every single `UPDATE` or `DELETE` operation. On large tables, this makes apply performance extremely slow.
- **PostgreSQL 16 and later:** The subscriber can use a btree or hash index for row lookups, even if that index is not explicitly set as the replica identity. However, the subscriber does not evaluate which index is most efficient. Beginning in version 16, PostgreSQL selects the first suitable index it finds, and the user has no control over this choice. If the selected index has low selectivity (for example, an index on a boolean or status column), the row lookup can be nearly as slow as a sequential scan. For this reason, relying on implicit index selection with `REPLICA IDENTITY FULL` is unreliable and should be considered a fallback, not a recommended configuration.

How REPLICA IDENTITY FULL causes replication lag

The two problems described above — larger WAL on the publisher and slower row lookups on the subscriber — combine to cause replication lag.

By default, PostgreSQL logical replication uses a single *apply worker* process per subscription to receive changes from the publisher and apply them to the subscriber's tables. The apply worker processes changes serially, one row at a time, in commit order. This means the subscriber's throughput is limited by how fast it can apply each individual change.

When `REPLICA IDENTITY FULL` is set on a table without an appropriate index, every `UPDATE` and `DELETE` requires a sequential scan of the entire table to find the matching row. If the table has millions of rows, each of these operations can take seconds or longer. The result is a cascading problem:

1. **The publisher generates changes faster than the subscriber can apply them.** The publisher's write workload continues at normal speed, but the subscriber's apply worker is bottlenecked on sequential scans or poorly selective indexes for each row lookup.
2. **WAL accumulates on the publisher and can exhaust storage.** PostgreSQL cannot reclaim WAL segments until the subscriber confirms it has applied them. As the subscriber falls further behind, the publisher accumulates WAL on disk. On Aurora PostgreSQL, this appears as growing `OldestReplicationSlotLag` in CloudWatch. In severe cases, this can consume all available storage and cause the publisher to stop accepting writes.
3. **The lag is self-reinforcing.** As the subscriber falls behind, the table on the subscriber continues to grow from replicated inserts, making each sequential scan even slower. Without intervention, the lag grows without bound.

This problem is especially severe for tables that receive frequent `UPDATE` or `DELETE` operations. `INSERT` operations are not affected because they don't require a row lookup on the subscriber.

> **Note**
>
> Starting with PostgreSQL 16, the apply worker can use parallel apply for large streaming transactions, which can help with throughput. However, the fundamental row-lookup bottleneck for `REPLICA IDENTITY FULL` without indexes remains, because each individual row still requires a scan to locate.

Impact on blue/green deployments

Blue/green deployments in Amazon Aurora use logical replication internally to keep the green environment synchronized with the blue environment by setting up a single subscription per database. The logical replication apply process in the green environment is *single-threaded*. A single apply worker process receives all changes from the blue environment and applies them one at a time, in commit order. There is no parallel apply in the blue/green replication path.

This single-threaded design means the green environment's ability to keep up with the blue environment depends entirely on how fast that one apply worker can process each individual change. When tables use `REPLICA IDENTITY FULL` without a primary key or suitable index, the impact on the apply worker depends on the PostgreSQL version. In versions prior to 16, every `UPDATE` and `DELETE` on those tables forces the apply worker to perform a sequential scan of the entire table to find the matching row. In versions 16 and later, PostgreSQL will use a suitable index if one is available, but if no qualifying index exists, the apply worker still falls back to a sequential scan. While the apply worker is scanning a large table for one row, all other pending changes across all tables queue up and wait.

The consequences for blue/green deployments are significant:

- **Replication lag grows continuously.** If the blue environment generates write traffic faster than the single apply worker can process it, the green environment falls further and further behind. Because the apply worker is single-threaded, there is no way to parallelize the catch-up.
- **Switchover can be blocked.** A blue/green switchover requires the green environment to be fully synchronized with the blue environment. If replication lag is too high, the switchover cannot complete within the timeout period.
- **The green environment might never catch up.** For write-heavy workloads with large tables using `REPLICA IDENTITY FULL` and no indexes, the apply rate can be so slow that the green environment falls permanently behind, making switchover impossible without first resolving the replica identity configuration.
- **WAL accumulates on the blue environment.** While the green environment is behind, the blue environment retains WAL segments for the replication slot. This increases storage usage on the blue (production) environment and can affect production performance.

To avoid these problems, ensure that all tables have a primary key or a suitable unique index explicitly configured as the replica identity using `ALTER TABLE ... REPLICA IDENTITY USING INDEX` *before* creating a blue/green deployment. Don't rely on `REPLICA IDENTITY FULL` with

implicit index selection in PostgreSQL 16+, because the subscriber might choose a poorly selective index or fall back to sequential scans. Test the deployment with a representative write workload to confirm the green environment can keep up.

For more information about blue/green deployment limitations, see the section called "Limitations and considerations". For best practices, see the section called "Aurora PostgreSQL best practices for blue/green deployments".

How to identify tables using REPLICA IDENTITY FULL

Run the following query to find all tables with `REPLICA IDENTITY FULL`:

```
SELECT n.nspname AS schema, c.relname AS table_name, c.relreplident
FROM pg_catalog.pg_class c
JOIN pg_catalog.pg_namespace n ON n.oid = c.relnamespace
WHERE c.relkind = 'r'
  AND c.relreplident = 'f'
  AND n.nspname NOT IN ('pg_catalog', 'information_schema')
ORDER BY n.nspname, c.relname;
```

The `relreplident` column values are:

- d — default (primary key)
- n — nothing
- f — full (entire row)
- i — a specific index

Workarounds and best practices

Add a primary key wherever possible

The most effective solution is to add a primary key to tables that lack one. When a primary key exists, PostgreSQL uses it as the default replica identity, which provides efficient row lookups on the subscriber and minimizes WAL overhead on the publisher.

```
ALTER TABLE my_table ADD COLUMN id bigint GENERATED ALWAYS AS IDENTITY PRIMARY KEY;
```

Important

This statement acquires an `ACCESS EXCLUSIVE` lock and rewrites the entire table, because the default value expression uses `nextval()` which is volatile. All reads and writes to the table are blocked for the duration of the rewrite. On large tables, this can cause significant downtime. Plan this change during a maintenance window or consider alternative approaches such as creating the column as nullable first, then backfilling and adding the constraint in separate steps.

If adding a primary key is not feasible due to application constraints, consider adding a unique index on a set of `NOT NULL` columns and setting it as the replica identity:

```
CREATE UNIQUE INDEX my_table_replica_idx ON my_table (col1, col2);
ALTER TABLE my_table REPLICA IDENTITY USING INDEX my_table_replica_idx;
```

Note

To avoid blocking writes while the index is built, use the `CONCURRENTLY` clause: `CREATE UNIQUE INDEX CONCURRENTLY my_table_replica_idx ON my_table (col1, col2);`

Note

The index used for replica identity must be unique, must not be partial, must not be deferrable, and must include only columns with `NOT NULL` constraints.

Don't rely on implicit index selection (PostgreSQL 16+)

Starting with PostgreSQL 16, the subscriber's apply worker can use btree or hash indexes for row lookups when the replica identity is set to `FULL`, even if those indexes are not explicitly configured as the replica identity. While this prevents sequential scans in some cases, relying on this implicit behavior is an anti-pattern for the following reasons:

- **You don't control which index is chosen.** PostgreSQL selects the first qualifying index it finds in catalog order, not the most selective or efficient one. If the table has multiple qualifying indexes, the one chosen might have low selectivity, leading to poor lookup performance.
- **The behavior is fragile.** Adding, dropping, or rebuilding indexes can change which index the apply worker uses, potentially causing unexpected performance regressions in replication.
- **It masks the underlying problem.** Tables without a primary key or explicit replica identity are inherently risky for logical replication. Relying on implicit index selection defers the problem rather than solving it.

Instead, explicitly configure the replica identity for every replicated table:

- **Best option:** Add a primary key. This is the most reliable and efficient replica identity.
- **Alternative:** Use `ALTER TABLE ... REPLICA IDENTITY USING INDEX` to designate a specific unique, non-partial, non-deferrable index with only `NOT NULL` columns. This gives you explicit control over which columns are used for row identification.

Reserve `REPLICA IDENTITY FULL` only for tables where neither option is feasible, and understand that performance depends on factors outside your direct control.

Monitor replication lag

When using `REPLICA IDENTITY FULL`, monitor replication lag closely to detect subscriber apply slowdowns before they become critical.

On the publisher, check the lag between the current WAL position and what the subscriber has confirmed:

```
SELECT slot_name, confirmed_flush_lsn, pg_current_wal_lsn(),
       (pg_current_wal_lsn() - confirmed_flush_lsn) AS lag_bytes
FROM pg_replication_slots
WHERE slot_type = 'logical';
```

A steadily growing `lag_bytes` value indicates the subscriber is falling behind. The `pg_stat_replication_slots` view provides additional statistics about each replication slot's usage.

On the subscriber, the `pg_stat_subscription` view shows the state of each apply worker, including the last WAL location received and reported:

```
SELECT subname, received_lsn, latest_end_lsn,
       last_msg_send_time, last_msg_receipt_time
FROM pg_stat_subscription;
```

> **Note**
>
> On PostgreSQL 16 and later, you can also select `worker_type` to distinguish between the main apply worker and parallel apply workers.

A large gap between `received_lsn` and `latest_end_lsn`, or stale timestamps in `last_msg_send_time`, can indicate the apply worker is struggling to keep up. The `pg_stat_subscription_stats` view also tracks apply errors and conflicts that might contribute to lag.

For Aurora PostgreSQL, you can also monitor the `OldestReplicationSlotLag` CloudWatch metric, which tracks the lag in bytes of the most behind replication slot. A rising value is an early warning sign of replication lag. For more information, see the section called “Monitoring the write-through cache and logical slots”.

Checking which tables might be using a sub-optimal index during apply

On the subscriber, you can identify tables where the apply worker is performing excessive heap reads, which can indicate that the table doesn't have an efficient index for row lookups during apply. Run the following query on the subscriber:

```
SELECT relname, heap_blks_read, heap_blks_hit,
       idx_blks_read, idx_blks_hit,
       heap_blks_read + heap_blks_hit AS total_heap_access
FROM pg_statio_user_tables
WHERE heap_blks_read > 0
ORDER BY heap_blks_read DESC
LIMIT 10;
```

A table with a high `heap_blks_read` value relative to `idx_blks_read` can indicate that the apply worker is not using an efficient index to locate rows for `UPDATE` and `DELETE` operations. This is a common source of replication lag when `REPLICA IDENTITY FULL` is in use.

> **Note**
>
> This query requires the `track_counts` parameter to be enabled on the subscriber. This parameter is on by default.

Evaluate whether REPLICA IDENTITY FULL is necessary

Before setting `REPLICA IDENTITY FULL`, consider whether you truly need it. Common reasons for using it include:

- The table has no primary key or unique index.
- You need the full before-image of rows for change data capture (CDC) consumers.
- You need TOASTed column values included in replication events for updates that don't modify those columns.

If your only reason is the lack of a primary key, adding one is almost always the better path. If you need full before-images for CDC, consider whether your CDC consumer can reconstruct full rows by maintaining state externally, which avoids the WAL and subscriber overhead of `REPLICA IDENTITY FULL`.

Summary of recommendations

Scenario	Recommendation
Table has a primary key	Use the default replica identity (no action needed)
Table has a unique NOT NULL index	Set that index as the replica identity with `ALTER TABLE ... REPLICA IDENTITY USING INDEX`
Table has no suitable key (PostgreSQL 16+)	Add a primary key or unique index. Using `REPLICA IDENTITY FULL` with implicit index selection is unreliable and should be a last resort

Scenario	Recommendation
Table has no suitable key (before PostgreSQL 16)	Add a primary key or unique index; avoid `REPLICA IDENTITY FULL` if possible
Write-heavy workload with large/TOASTed columns	Avoid `REPLICA IDENTITY FULL` due to WAL volume amplification

Initial troubleshooting for common PostgreSQL performance issues in Aurora PostgreSQL

This guide covers the four most common performance issues that affect Aurora PostgreSQL databases: table and index bloat, parallel query resource exhaustion, high connection and authentication pressure, and autovacuum tuning. Use this guide as a first-pass diagnostic checklist when you experience performance degradation, before you begin deeper investigation.

Each section describes the symptoms you might observe, provides diagnostic queries to confirm the root cause, and recommends specific remediation steps.

⚠ Understanding "nothing changed" performance regressions

PostgreSQL workloads often run without issues for weeks or months, then experience sudden performance degradation even though the application code and query patterns appear unchanged. This happens because the database environment is never truly static — several invisible factors shift over time and can trigger plan changes or resource contention:

- **Bloat accumulation is a workload change.** PostgreSQL's multiversion concurrency control (MVCC) retains old row versions until autovacuum reclaims them. When dead tuples accumulate faster than autovacuum can process them, tables and indexes grow physically larger. The query planner may then switch from efficient index scans to sequential scans because the cost estimates shift as the table size increases. Your SQL hasn't changed, but the data the planner sees has.
- **New parameter values are a workload change.** A parameterized query that performs well for one range of values can perform poorly when the application begins using a different range. PostgreSQL may reuse a generic execution plan that doesn't account for data skew in the new range, or the planner's statistics may not accurately reflect the

distribution for those values. When bloat is also present, the impact compounds — a suboptimal plan now scans significantly more dead data.

- **Statistics can be stale even when autovacuum runs.** Autovacuum triggers `ANALYZE` based on the number of rows inserted or updated, not on whether the data distribution has meaningfully changed. If your application shifts to querying a different value range or time window, the planner's cost estimates may be inaccurate even though autovacuum has run recently.
- **Overall database growth is a workload change.** As tables grow over time, the volume of data pages that queries must scan increases. Queries that performed well on smaller tables may develop latency as the table size grows, even when the query logic and indexes remain unchanged. Monitor `VolumeBytesUsed` to track storage growth trends.

When you investigate performance regressions where "nothing changed," treat bloat accumulation, new parameter value ranges, overall database growth, and stale statistics as the most likely root causes. Use the diagnostic steps in this guide to confirm which factor applies.
For more information, see the following:

- Maintenance activities for PostgreSQL databases in Amazon RDS and Amazon Aurora (Amazon Prescriptive Guidance)
- Optimizing PostgreSQL query performance (Amazon Prescriptive Guidance)
- Managing query execution plans for Aurora PostgreSQL
- Monitoring Amazon Aurora metrics with Amazon CloudWatch (monitor `VolumeBytesUsed` for storage growth trends)

Quick diagnostic checklist

Use the following ordered triage steps when you first investigate a performance issue:

1. **Check `pg_stat_activity`.** Look at connection count, idle-in-transaction sessions, and long-running queries. For more information, see Essential concepts for Aurora PostgreSQL tuning.
2. **Check for bloat.** Look for high `n_dead_tup` in `pg_stat_user_tables` and consider using `pgstattuple` for precise measurement. For more information, see Diagnosing table and index bloat.

3. **Check `pg_stat_user_tables`.** Look for high `n_dead_tup` values and stale `last_autovacuum` timestamps. For more information, see Working with PostgreSQL autovacuum on Aurora PostgreSQL.
4. **Review `EXPLAIN ANALYZE` on slow queries.** Look for parallel plans and sequential scans on large tables. For more information, see Best practices for parallel queries in Aurora PostgreSQL.
5. **Check CloudWatch and Performance Insights metrics.** Review CPU utilization, connection count, IOPS, and freeable memory. For more information, see Monitoring Amazon Aurora. For common wait events and corrective actions, see Aurora PostgreSQL wait events.
6. **Review your DB parameter group.** Check `max_parallel_workers_per_gather` and autovacuum settings. For more information, see Amazon Aurora PostgreSQL parameters.

Table and index bloat

Table and index bloat occurs when dead tuples accumulate in your tables faster than autovacuum can reclaim them. Over time, this causes gradual query performance degradation, increased storage usage, and suboptimal query plans.

Symptoms

- Gradual query performance degradation over weeks or months
- Storage usage growing despite stable data volume
- The query planner chooses sequential scans over index scans due to stale statistics
- High `dead_tuple_count` in table statistics

Diagnosis

You can estimate bloat across all tables by querying the system catalog. This approach does not require any extensions:

```
SELECT schemaname, relname,
       n_dead_tup,
       n_live_tup,
       ROUND(n_dead_tup::numeric / GREATEST(n_live_tup, 1) * 100, 2) AS dead_pct,
       last_autovacuum,
       last_autoanalyze
FROM pg_stat_user_tables
WHERE n_dead_tup > 10000
ORDER BY n_dead_tup DESC
```

```
LIMIT 20;
```

To address bloat, you can use the `pg_repack` extension to reorganize tables and indexes with minimal locking. For more information, see Removing bloat from tables with pg_repack and Remove bloat from Amazon Aurora and RDS for PostgreSQL with pg_repack.

> **Important**
>
> Rather than relying on manual maintenance, ensure that autovacuum is enabled and properly tuned for your workload. See the section called "Autovacuum tuning" for tuning recommendations.

Parallel query resource exhaustion

PostgreSQL can execute queries in parallel to improve performance for large sequential scans and aggregations. However, each parallel worker is a full backend process that counts against `max_worker_processes` (and the sub-limit `max_parallel_workers`) and allocates its own `work_mem`. A single query with 4 parallel workers can consume hundreds of megabytes of memory and significant CPU. Under high concurrency, excessive parallelism can exhaust CPU and memory rapidly.

Common symptoms include sudden CPU spikes, high memory usage per query, and elevated `DatabaseConnections` in CloudWatch without application changes. You may also observe wait events such as `IPC:BgWorkerStartup`, `IPC:ExecuteGather`, and `IPC:ParallelFinish`. For more information about these wait events, see IPC:parallel wait events.

For most OLTP and high-concurrency production workloads, disable automatic parallelism by setting `max_parallel_workers_per_gather = 0` in your DB parameter group. You can then selectively enable parallelism for specific analytics or reporting sessions by setting the parameter per session or per role.

For detailed guidance on diagnosing and controlling parallel query behavior, see Best practices for parallel queries in Aurora PostgreSQL.

High connection and authentication pressure

Connection churn — frequent opening and closing of database connections without pooling — creates authentication overhead and can exhaust available connection slots. Idle connections that remain open also consume slots without performing useful work.

Symptoms

- Elevated `total_auth_attempts` in Performance Insights monitoring. For more information, see Non-native counters for Aurora PostgreSQL.
- Slow connection establishment times
- `FATAL: too many connections for role` or `remaining connection slots are reserved` errors
- CPU spikes correlated with connection churn

Diagnosis

Run the following query to check your current connection state:

```
SELECT
  setting::int AS max_connections,
  (SELECT count(*) FROM pg_stat_activity) AS current_connections,
  (SELECT count(*) FROM pg_stat_activity WHERE state = 'idle') AS idle_connections,
  (SELECT count(*) FROM pg_stat_activity WHERE state = 'idle in transaction') AS
 idle_in_txn
FROM pg_settings
WHERE name = 'max_connections';
```

A high number of `idle` or `idle in transaction` connections relative to `max_connections` indicates that connections are not being released properly. Idle-in-transaction connections are especially problematic because they hold locks and prevent autovacuum from reclaiming dead tuples.

Remediation

- **Deploy connection pooling.** Use PgBouncer or Amazon RDS Proxy to reduce the number of direct connections to your database. Connection pooling reuses existing connections rather than creating new ones for each request.
- **Set `idle_in_transaction_session_timeout`.** This parameter automatically terminates sessions that remain idle in a transaction beyond the specified duration. This prevents long-running idle transactions from holding locks and blocking autovacuum.
- **Review application connection handling.** Ensure your application closes connections promptly and does not hold transactions open longer than necessary.

> **Note**
>
> Parallel query workers consume CPU and memory. If you observe resource exhaustion alongside parallel query activity, see the section called "Parallel query resource exhaustion" for guidance on controlling parallel worker usage.

Using Performance Insights wait events for troubleshooting

Performance Insights captures wait events that show where your database is spending time. When you investigate performance issues, wait events help you identify whether the bottleneck is CPU, I/O, locking, network, or inter-process communication. Common wait event categories that appear during the issues described in this guide include:

- **CPU** — The session is active on CPU or waiting for CPU. High CPU wait events often correlate with excessive parallelism or inefficient query plans scanning bloated tables.
- **IPC (inter-process communication)** — Wait events such as `IPC:BgWorkerStartup`, `IPC:ExecuteGather`, and `IPC:ParallelFinish` indicate parallel query coordination overhead.
- **IO** — Wait events such as `IO:DataFileRead` indicate that queries are reading data from storage because the required pages are not in shared memory. This is common when bloated tables exceed the buffer cache.
- **Lock** — Wait events such as `Lock:transactionid` and `Lock:tuple` indicate contention between sessions. Idle-in-transaction connections can hold locks that block other queries and autovacuum.
- **Client** — Wait events such as `Client:ClientRead` indicate the database is waiting for the application to send data. High client wait events can indicate connection churn or network latency.

For a complete reference of wait events that commonly indicate performance problems and their recommended corrective actions, see Aurora PostgreSQL wait events.

Autovacuum tuning

Autovacuum is the background process that reclaims dead tuples, prevents table and index bloat, updates planner statistics, and protects against transaction ID wraparound. The default

autovacuum settings are conservative and designed for small databases. High-write production workloads almost always require tuning.

When autovacuum cannot keep up with your write workload, bloat accumulates, planner statistics become stale, and the risk of transaction ID wraparound increases. If `age(relfrozenxid)` approaches 2 billion, the database shuts down to prevent data corruption.

For detailed guidance on tuning autovacuum parameters, monitoring vacuum activity, and configuring per-table overrides, see Working with PostgreSQL autovacuum on Aurora PostgreSQL.

Related information

- Best practices for parallel queries in Aurora PostgreSQL
- Managing Aurora PostgreSQL connection churn with pooling
- Managing autovacuum with large indexes
- Diagnosing table and index bloat
- IPC:Parallel wait events reference
- Best practices with Amazon Aurora PostgreSQL

Troubleshooting storage issues in Aurora PostgreSQL

If the amount of working memory needed for sort or index-creation operations exceeds the amount allocated by the `work_mem` parameter, Aurora PostgreSQL writes the excess data to temporary disk files. When it writes the data, Aurora PostgreSQL uses the same storage space that it uses for storing error and message logs, that is, *local storage*. Each instance in your Aurora PostgreSQL DB cluster has an amount of local storage available. The amount of storage is based on its DB instance class. To increase the amount of local storage, you need to modify the instance to use a larger DB instance class. For DB instance class specifications, see Hardware specifications for DB instance classes for Aurora.

You can monitor your Aurora PostgreSQL DB cluster's local storage space by watching the Amazon CloudWatch metric for `FreeLocalStorage`. This metric reports the amount of storage available to each DB instance in the Aurora DB cluster for temporary tables and logs. For more information, see Monitoring Amazon Aurora metrics with Amazon CloudWatch.

Sorting, indexing, and grouping operations start in working memory but often must be offloaded to local storage. If your Aurora PostgreSQL DB cluster runs out of local storage because of these types of operations, you can resolve the issue by taking one of the following actions.

- Increase the amount of working memory. This reduces the need to use local storage. By default, PostgreSQL allocates 4 MB for each sort, group, and index operation. To check the current working memory value for your Aurora PostgreSQL DB cluster's writer instance, connect to the instance using `psql` and run the following command.

  ```
  postgres=> SHOW work_mem;
  work_mem
  ----------
   4MB
  (1 row)
  ```

  You can increase the working memory at the session level before sort, group, and other operations, as follows.

  ```
  SET work_mem TO '1 GB';
  ```

  For more information about working memory, see Resource Consumption in the PostgreSQL documentation.
- Change the log retention period so that logs are stored for shorter timeframes. To learn how, see Aurora PostgreSQL database log files.

For Aurora PostgreSQL DB clusters larger than 40 TB, don't use db.t2, db.t3, or db.t4g instance classes. We recommend using the T DB instance classes only for development and test servers, or other non-production servers. For more information, see DB instance class types.

Replication with Amazon Aurora PostgreSQL

Following, you can find information about replication with Amazon Aurora PostgreSQL, including how to monitor and use logical replication.

Topics

- Using Aurora Replicas
- Improving the read availability of Aurora Replicas
- Monitoring Aurora PostgreSQL replication
- Overview of PostgreSQL logical replication with Aurora
- Setting up logical replication for your Aurora PostgreSQL DB cluster

- Turning off logical replication
- Monitoring the write-through cache and logical slots for Aurora PostgreSQL logical replication
- Example: Using logical replication with Aurora PostgreSQL DB clusters
- Example: Logical replication using Aurora PostgreSQL and Amazon Database Migration Service
- Configuring IAM authentication for logical replication connections

Using Aurora Replicas

An *Aurora Replica* is an independent endpoint in an Aurora DB cluster, best used for scaling read operations and increasing availability. An Aurora DB cluster can include up to 15 Aurora Replicas located throughout the Availability Zones of the Aurora DB cluster's Amazon Region.

The DB cluster volume is made up of multiple copies of the data for the DB cluster. However, the data in the cluster volume is represented as a single, logical volume to the primary writer DB instance and to Aurora Replicas in the DB cluster. For more information about Aurora Replicas, see Aurora Replicas.

Aurora Replicas work well for read scaling because they're fully dedicated to read operations on your cluster volume. The writer DB instance manages write operations. The cluster volume is shared among all instances in your Aurora PostgreSQL DB cluster. Thus, no extra work is needed to replicate a copy of the data for each Aurora Replica.

With Aurora PostgreSQL, when an Aurora Replica is deleted, its instance endpoint is removed immediately, and the Aurora Replica is removed from the reader endpoint. If there are statements running on the Aurora Replica that is being deleted, there is a three minute grace period. Existing statements can finish gracefully during the grace period. When the grace period ends, the Aurora Replica is shut down and deleted.

Aurora PostgreSQL DB clusters support Aurora Replicas in different Amazon Regions, using Aurora global database. For more information, see Using Amazon Aurora Global Database.

> **Note**
>
> With the read availability feature, if you want to reboot the Aurora Replicas in the DB cluster, you have to perform it manually. For the DB clusters created prior to this feature rebooting the writer DB instance automatically reboots the Aurora Replicas. The automatic

reboot re-establishes an entry point that guarantees read/write consistency across the DB cluster.

Improving the read availability of Aurora Replicas

Aurora PostgreSQL improves the read availability in the DB cluster by continuously serving the read requests when the writer DB instance restarts or when the Aurora Replica is unable to keep up with the write traffic.

The read availability feature is available by default on the following versions of Aurora PostgreSQL:

- 16.1 and all higher versions
- 15.2 and higher 15 versions
- 14.7 and higher 14 versions
- 13.10 and higher 13 versions
- 12.14 and higher 12 versions

The read availability feature is supported by Aurora global database in the following versions:

- 16.1 and all higher versions
- 15.4 and higher 15 versions
- 14.9 and higher 14 versions
- 13.12 and higher 13 versions
- 12.16 and higher 12 versions

To use the read availability feature for a DB cluster created on one of these versions prior to this launch, restart the writer instance of the DB cluster.

When you modify static parameters of your Aurora PostgreSQL DB cluster, you must restart the writer instance so that the parameter changes take effect. For example, you must restart the writer instance when you set the value of `shared_buffers`. With the read availability feature of Aurora Replicas, the DB cluster maintains improved availability, reducing the impact on it when the writer instance restarts. The reader instances don't restart and continue to respond to the read requests. To apply static parameter changes, reboot each individual reader instance.

An Aurora PostgreSQL DB cluster's Aurora Replica can recover from replication errors such as writer restarts, failover, slow replication, and network issues by quickly recovering to in-memory database state after it reconnects with the writer. This approach allows Aurora Replica instances to reach consistency with the latest storage updates while the client database is still available.

The in-progress transactions that conflict with replication recovery might receive an error but the client can retry these transactions, after the readers catch up with the writer.

Monitoring Aurora Replicas

You can monitor the Aurora Replicas when recovering from a writer disconnect. Use the metrics below to check for the latest information about the reader instance and to track in-process read-only transactions.

- The `aurora_replica_status` function is updated to return the most up-to-date information for the reader instance when it is still connected. The last update time stamp in `aurora_replica_status` is always empty for the row corresponding to the DB instance that the query is executed on. This indicates that the reader instance has the latest data.
- When the Aurora replica disconnects from the writer instance and reconnects back, the following database event is emitted:

  ```
  Read replica has been disconnected from the writer instance and
  reconnected.
  ```
- When a read-only query is canceled due to a recovery conflict, you might see one or more of the following error messages in the database error log:

  ```
  Canceling statement due to conflict with recovery.
  ```

  ```
  User query may not have access to page data to replica disconnect.
  ```

  ```
  User query might have tried to access a file that no longer exists.
  ```

  ```
  When the replica reconnects, you will be able to repeat your command.
  ```

Limitations

The following limitations apply to Aurora Replicas with the read availability feature:

- Aurora Replicas of secondary DB cluster can restart if the data can't be streamed from the writer instance during replication recovery.

- Aurora Replicas don't support online replication recovery if one is already in progress and will restart.
- Aurora Replicas will restart when your DB instance is nearing the transaction ID wraparound. For more information on transaction ID wraparound, see Preventing Transaction ID Wraparound Failures.
- Aurora Replicas can restart when the replication process is blocked under certain circumstances.

Monitoring Aurora PostgreSQL replication

Read scaling and high availability depend on minimal lag time. You can monitor how far an Aurora Replica is lagging behind the writer DB instance of your Aurora PostgreSQL DB cluster by monitoring the Amazon CloudWatch `ReplicaLag` metric. Because Aurora Replicas read from the same cluster volume as the writer DB instance, the `ReplicaLag` metric has a different meaning for an Aurora PostgreSQL DB cluster. The `ReplicaLag` metric for an Aurora Replica indicates the lag for the page cache of the Aurora Replica compared to that of the writer DB instance.

For more information on monitoring RDS instances and CloudWatch metrics, see Monitoring metrics in an Amazon Aurora cluster.

Overview of PostgreSQL logical replication with Aurora

By using PostgreSQL's logical replication feature with your Aurora PostgreSQL DB cluster, you can replicate and synchronize individual tables rather than the entire database instance. Logical replication uses a publish and subscribe model to replicate changes from a source to one or more recipients. It works by using change records from the PostgreSQL write-ahead log (WAL). The source, or *publisher*, sends WAL data for the specified tables to one or more recipients (*subscriber*), thus replicating the changes and keeping a subscriber's table synchronized with the publisher's table. The set of changes from the publisher are identified using a *publication*. Subscribers get the changes by creating a *subscription* that defines the connection to the publisher's database and its publications. A *replication slot* is the mechanism used in this scheme to track progress of a subscription.

For Aurora PostgreSQL DB clusters, the WAL records are saved on Aurora storage. The Aurora PostgreSQL DB cluster that's acting as the publisher in a logical replication scenario reads the WAL data from Aurora storage, decodes it, and sends it to the subscriber so that the changes can be applied to the table on that instance. The publisher uses a *logical decoder* to decode the data for use by subscribers. By default, Aurora PostgreSQL DB clusters use the native PostgreSQL

`pgoutput` plugin when sending data. Other logical decoders are available. For example, Aurora PostgreSQL also supports the `wal2json` plugin that converts WAL data to JSON.

As of Aurora PostgreSQL version 14.5, 13.8, 12.12, and 11.17, Aurora PostgreSQL augments the PostgreSQL logical replication process with a *write-through cache* to improve performance. The WAL transaction logs are cached locally, in a buffer, to reduce the amount of disk I/O, that is, reading from Aurora storage during logical decoding. The write-through cache is used by default whenever you use logical replication for your Aurora PostgreSQL DB cluster. Aurora provides several functions that you can use to manage the cache. For more information, see Monitoring the Aurora PostgreSQL logical replication write-through cache.

Logical replication is supported by all currently available Aurora PostgreSQL versions. For more information, Amazon Aurora PostgreSQL updates in the *Release Notes for Aurora PostgreSQL*.

Logical replication is supported by Babelfish for Aurora PostgreSQL from the following versions:

- 15.7 and higher versions
- 16.3 and higher versions

> **Note**
>
> In addition to the native PostgreSQL logical replication feature introduced in PostgreSQL 10, Aurora PostgreSQL also supports the `pglogical` extension. For more information, see Using pglogical to synchronize data across instances.

For more information about PostgreSQL logical replication, see Logical replication and Logical decoding concepts in the PostgreSQL documentation.

> **Note**
>
> PostgreSQL 16 added support for logical decoding from read replicas. This feature isn't supported on Aurora PostgreSQL.

Setting up logical replication for your Aurora PostgreSQL DB cluster

Setting up logical replication requires `rds_superuser` privileges. Your Aurora PostgreSQL DB cluster must be configured to use a custom DB cluster parameter group so that you can set the necessary parameters as detailed in the procedure following. For more information, see DB cluster parameter groups for Amazon Aurora DB clusters.

To set up PostgreSQL logical replication for an Aurora PostgreSQL DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose your Aurora PostgreSQL DB cluster.
3. Open the **Configuration** tab. Among the Instance details, find the **Parameter group** link with **DB cluster parameter group** for **Type**.
4. Choose the link to open the custom parameters associated with your Aurora PostgreSQL DB cluster.
5. In the **Parameters** search field, type `rds` to find the `rds.logical_replication` parameter. The default value for this parameter is `0`, meaning that it's turned off by default.
6. Choose **Edit parameters** to access the property values, and then choose `1` from the selector to turn on the feature. Depending on your expected usage, you might also need to change the settings for the following parameters. However, in many cases, the default values are sufficient.

   - `max_replication_slots` – Set this parameter to a value that's at least equal to your planned total number of logical replication publications and subscriptions. If you are using Amazon DMS, this parameter should equal at least your planned change data capture tasks from the cluster, plus logical replication publications and subscriptions.
   - `max_wal_senders` and `max_logical_replication_workers` – Set these parameters to a value that's at least equal to the number of logical replication slots that you intend to be active, or the number of active Amazon DMS tasks for change data capture. Leaving a logical replication slot inactive prevents the vacuum from removing obsolete tuples from tables, so we recommend that you monitor replication slots and remove inactive slots as needed.
   - `max_worker_processes` – Set this parameter to a value that's at least equal to the total of the `max_logical_replication_workers`, `autovacuum_max_workers`, and `max_parallel_workers` values. On small DB instance classes, background worker processes can affect application workloads, so monitor the performance of your database

if you set `max_worker_processes` higher than the default value. (The default value is the result of `GREATEST(${DBInstanceVCPU*2},8}`, which means that, by default, this is either 8 or twice the CPU equivalent of the DB instance class, whichever is greater).

> **Note**
>
> You can modify parameter values in a customer-created DB parameter group. you can't change the parameter values in a default DB parameter group.

7. Choose **Save changes**.
8. Reboot the writer instance of your Aurora PostgreSQL DB cluster so that your changes takes effect. In the Amazon RDS console, choose the primary DB instance of the cluster and choose **Reboot** from the **Actions** menu.
9. When the instance is available, you can verify that logical replication is turned on, as follows.

   a. Use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster.

   ```
   psql --host=your-db-cluster-instance-1.aws-region.rds.amazonaws.com --port=5432
    --username=postgres --password --dbname=labdb
   ```

   b. Verify that logical replication has been enabled by using the following command.

   ```
   labdb=> SHOW rds.logical_replication;
    rds.logical_replication
   -------------------------
    on
   (1 row)
   ```

   c. Verify that the `wal_level` is set to `logical`.

   ```
   labdb=> SHOW wal_level;
     wal_level
   -----------
    logical
   (1 row)
   ```

For an example of using logical replication to keep a database table synchronized with changes from a source Aurora PostgreSQL DB cluster, see Example: Using logical replication with Aurora PostgreSQL DB clusters.

Turning off logical replication

After completing your replication tasks, you should stop the replication process, drop replication slots, and turn off logical replication. Before dropping slots, make sure that they're no longer needed. Active replication slots can't be dropped.

To turn off logical replication

1. Drop all replication slots.

   To drop all of the replication slots, connect to the publisher and run the following SQL command.

   ```
   SELECT pg_drop_replication_slot(slot_name)
     FROM pg_replication_slots
    WHERE slot_name IN (SELECT slot_name FROM pg_replication_slots);
   ```

   The replication slots can't be active when you run this command.

2. Modify the custom DB cluster parameter group associated with the publisher as detailed in Setting up logical replication for your Aurora PostgreSQL DB cluster, but set the `rds.logical_replication` parameter to 0.

   For more information about custom parameter groups, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

3. Restart the publisher Aurora PostgreSQL DB cluster for the change to the `rds.logical_replication` parameter to take effect.

Monitoring the write-through cache and logical slots for Aurora PostgreSQL logical replication

Monitor the logical replication write-through cache and manage logical slots to improve performance for your Aurora PostgreSQL DB cluster. Following, find more information about the write-through cache and logical slots.

Topics

- Monitoring the Aurora PostgreSQL logical replication write-through cache
- Managing logical slots for Aurora PostgreSQL

Monitoring the Aurora PostgreSQL logical replication write-through cache

By default, Aurora PostgreSQL versions 14.5, 13.8, 12.12, and 11.17 and higher use a write-through cache to improve the performance for logical replication. Without the write-through cache, Aurora PostgreSQL uses the Aurora storage layer in its implementation of the native PostgreSQL logical replication process. It does so by writing WAL data to storage and then reading the data back from storage to decode it and send (replicate) to its targets (subscribers). This can result in bottlenecks during logical replication for Aurora PostgreSQL DB clusters.

The write-through cache minimizes reliance on the Aurora storage layer. Instead of consistently writing to and reading from this layer, Aurora PostgreSQL uses a buffer to cache the logical WAL stream for use during the replication process, reducing the need to access disk. This buffer is the native PostgreSQL cache used in logical replication and is identified in Aurora PostgreSQL DB cluster parameters as `rds.logical_wal_cache`.

When you use logical replication with your Aurora PostgreSQL DB cluster (for the versions that support the write-through cache), you can monitor the cache hit ratio to see how well it's working for your use case. To do so, connect to your Aurora PostgreSQL DB cluster's write instance using `psql` and then use the Aurora function, `aurora_stat_logical_wal_cache`, as shown in the following example.

```
SELECT * FROM aurora_stat_logical_wal_cache();
```

The function returns output such as the following.

```
name       | active_pid | cache_hit | cache_miss | blks_read | hit_rate |
 last_reset_timestamp
-----------+------------+-----------+------------+-----------+----------+--------------
test_slot1 | 79183      | 24        | 0          | 24        | 100.00%  | 2022-08-05
 17:39...
test_slot2 |            | 1         | 0          |  1        | 100.00%  | 2022-08-05
 17:34...
(2 rows)
```

The `last_reset_timestamp` values have been shortened for readability. For more information about this function, see aurora_stat_logical_wal_cache.

Aurora PostgreSQL provides the following two functions for monitoring the write-through cache.

- The `aurora_stat_logical_wal_cache` function – For reference documentation, see aurora_stat_logical_wal_cache.
- The `aurora_stat_reset_wal_cache` function – For reference documentation, see aurora_stat_reset_wal_cache.

If you find that the automatically adjusted WAL cache size isn't sufficient for your workloads, you can change the value of the `rds.logical_wal_cache` manually. Consider the following:

- When the `rds.logical_replication` parameter is disabled, `rds.logical_wal_cache` is set to zero (0).
- When the `rds.logical_replication` parameter is enabled, `rds.logical_wal_cache` has a default value of 16 MB.
- When you enable the `aurora.enhanced_logical_replication` parameter, Aurora PostgreSQL doesn't use the write-through cache. Enhanced logical replication reads the log records that it replicates through a different mechanism. In this case, Aurora PostgreSQL sets `rds.logical_wal_cache` to zero (0) and ignores any value that you set for this parameter. Aurora zero-ETL integrations require enhanced logical replication. For more information, see Getting started with Aurora zero-ETL integrations.
- The `rds.logical_wal_cache` parameter is static and requires a database instance reboot for changes to take effect. This parameter is defined in terms of 8 Kb blocks. Note that any positive value less than 32 Kb is treated as 32 Kb. For more information about `wal_buffers` see Write Ahead Log in the PostgreSQL documentation.

Managing logical slots for Aurora PostgreSQL

Streaming activity is captured in the `pg_replication_origin_status` view. To see the contents of this view, you can use the `pg_show_replication_origin_status()` function, as shown following:

```
SELECT * FROM pg_show_replication_origin_status();
```

You can get a list of your logical slots by using the following SQL query.

```
SELECT * FROM pg_replication_slots;
```

To drop a logical slot, use the `pg_drop_replication_slot` with the name of the slot, as shown in the following command.

```
SELECT pg_drop_replication_slot('test_slot');
```

Example: Using logical replication with Aurora PostgreSQL DB clusters

The following procedure shows you how to start logical replication between two Aurora PostgreSQL DB clusters. Both the publisher and the subscriber must be configured for logical replication as detailed in Setting up logical replication for your Aurora PostgreSQL DB cluster.

The Aurora PostgreSQL DB cluster that's the designated publisher must also allow access to the replication slot. To do so, modify the security group associated with the Aurora PostgreSQL DB cluster 's virtual public cloud (VPC) based on the Amazon VPC service. Allow inbound access by adding the security group associated with the subscriber's VPC to the publisher's security group. For more information, see Control traffic to resources using security groups in the *Amazon VPC User Guide*.

With these preliminary steps complete, you can use PostgreSQL commands `CREATE PUBLICATION` on the publisher and the `CREATE SUBSCRIPTION` on the subscriber, as detailed in the following procedure.

To start the logical replication process between two Aurora PostgreSQL DB clusters

These steps assume that your Aurora PostgreSQL DB clusters have a writer instance with a database in which to create the example tables.

1. **On the publisher Aurora PostgreSQL DB cluster**

   a. Create a table using the following SQL statement.

   ```
   CREATE TABLE LogicalReplicationTest (a int PRIMARY KEY);
   ```

   b. Insert data into the publisher database by using the following SQL statement.

   ```
   INSERT INTO LogicalReplicationTest VALUES (generate_series(1,10000));
   ```

   c. Verify that data exists in the table by using the following SQL statement.

```
SELECT count(*) FROM LogicalReplicationTest;
```

d. Create a publication for this table by using the `CREATE PUBLICATION` statement, as follows.

```
CREATE PUBLICATION testpub FOR TABLE LogicalReplicationTest;
```

2. **On the subscriber Aurora PostgreSQL DB cluster**

a. Create the same `LogicalReplicationTest` table on the subscriber that you created on the publisher, as follows.

```
CREATE TABLE LogicalReplicationTest (a int PRIMARY KEY);
```

b. Verify that this table is empty.

```
SELECT count(*) FROM LogicalReplicationTest;
```

c. Create a subscription to get the changes from the publisher. You need to use the following details about the publisher Aurora PostgreSQL DB cluster.

- **host** – The publisher Aurora PostgreSQL DB cluster's writer DB instance.
- **port** – The port on which the writer DB instance is listening. The default for PostgreSQL is 5432.
- **dbname** – The name of the database.

```
CREATE SUBSCRIPTION testsub CONNECTION
   'host=publisher-cluster-writer-endpoint port=5432 dbname=db-name user=user
 password=password'
   PUBLICATION testpub;
```

> **Note**
>
> Specify a password other than the prompt shown here as a security best practice.

After the subscription is created, a logical replication slot is created at the publisher.

d. To verify for this example that the initial data is replicated on the subscriber, use the following SQL statement on the subscriber database.

```
SELECT count(*) FROM LogicalReplicationTest;
```

Any further changes on the publisher are replicated to the subscriber.

Logical replication affects performance. We recommend that you turn off logical replication after your replication tasks are complete.

Example: Logical replication using Aurora PostgreSQL and Amazon Database Migration Service

You can use the Amazon Database Migration Service (Amazon DMS) to replicate a database or a portion of a database. Use Amazon DMS to migrate your data from an Aurora PostgreSQL database to another open source or commercial database. For more information about Amazon DMS, see the Amazon Database Migration Service User Guide.

The following example shows how to set up logical replication from an Aurora PostgreSQL database as the publisher and then use Amazon DMS for migration. This example uses the same publisher and subscriber that were created in Example: Using logical replication with Aurora PostgreSQL DB clusters.

To set up logical replication with Amazon DMS, you need details about your publisher and subscriber from Amazon RDS. In particular, you need details about the publisher's writer DB instance and the subscriber's DB instance.

Get the following information for the publisher's writer DB instance:

- The virtual private cloud (VPC) identifier
- The subnet group
- The Availability Zone (AZ)
- The VPC security group
- The DB instance ID

Get the following information for the subscriber's DB instance:

- The DB instance ID
- The source engine

To use Amazon DMS for logical replication with Aurora PostgreSQL

1. Prepare the publisher database to work with Amazon DMS.

   To do this, PostgreSQL 10.x and later databases require that you apply Amazon DMS wrapper functions to the publisher database. For details on this and later steps, see the instructions in Using PostgreSQL version 10.x and later as a source for Amazon DMS in the *Amazon Database Migration Service User Guide.*
2. Sign in to the Amazon Web Services Management Console and open the Amazon DMS console at https://console.amazonaws.cn/dms/v2. Choose the same Amazon Region in which the publisher and subscriber are located.
3. Create an Amazon DMS replication instance.

   Choose values that are the same as for your publisher's writer DB instance. These include the following settings:

   - For **VPC**, choose the same VPC as for the writer DB instance.
   - For **Replication Subnet Group**, choose a subnet group with the same values as the writer DB instance. Create a new one if necessary.
   - For **Availability zone**, choose the same zone as for the writer DB instance.
   - For **VPC Security Group**, choose the same group as for the writer DB instance.
4. Create an Amazon DMS endpoint for the source.

   Specify the publisher as the source endpoint by using the following settings:

   - For **Endpoint type**, choose **Source endpoint**.
   - Choose **Select RDS DB Instance**.
   - For **RDS Instance**, choose the DB identifier of the publisher's writer DB instance.
   - For **Source engine**, choose **postgres**.
5. Create an Amazon DMS endpoint for the target.

   Specify the subscriber as the target endpoint by using the following settings:

   - For **Endpoint type**, choose **Target endpoint**.

- Choose **Select RDS DB Instance**.
- For **RDS Instance**, choose the DB identifier of the subscriber DB instance.
- Choose a value for **Source engine**. For example, if the subscriber is an RDS PostgreSQL database, choose **postgres**. If the subscriber is an Aurora PostgreSQL database, choose **aurora-postgresql**.

6. Create an Amazon DMS database migration task.

   You use a database migration task to specify what database tables to migrate, to map data using the target schema, and to create new tables on the target database. At a minimum, use the following settings for **Task configuration**:

   - For **Replication instance**, choose the replication instance that you created in an earlier step.
   - For **Source database endpoint**, choose the publisher source that you created in an earlier step.
   - For **Target database endpoint**, choose the subscriber target that you created in an earlier step.

   The rest of the task details depend on your migration project. For more information about specifying all the details for DMS tasks, see Working with Amazon DMS tasks in the *Amazon Database Migration Service User Guide.*

After Amazon DMS creates the task, it begins migrating data from the publisher to the subscriber.

Configuring IAM authentication for logical replication connections

Starting with Aurora PostgreSQL versions 11 and higher, you can use Amazon Identity and Access Management (IAM) authentication for replication connections. This feature enhances security by allowing you to manage database access using IAM roles instead of passwords. It works at the cluster level and follows the same security model as standard IAM authentication.

IAM authentication for replication connections is an opt-in feature. To enable it, set the `rds.iam_auth_for_replication` parameter to 1 in your DB cluster parameter group. As this is a dynamic parameter, your DB cluster doesn't need to restart, enabling you to leverage IAM authentication with existing workloads without downtime. Before enabling this feature, you must meet the Prerequisites listed below.

Prerequisites

To use IAM authentication for replication connections, you need to meet all of the following requirements:

- Your Aurora PostgreSQL DB cluster must be version 11 or later.
- On your publisher Aurora PostgreSQL DB cluster:
  - Enable IAM database authentication.

    For more information, see Enabling and disabling IAM database authentication.
  - Enable logical replication by setting the `rds.logical_replication` parameter to 1.

    For more information, see Setting up logical replication for your Aurora PostgreSQL DB cluster.

  In logical replication, the publisher is the source Aurora PostgreSQL DB cluster that sends data to subscriber clusters. For more information, see Overview of PostgreSQL logical replication with Aurora.

> **Note**
>
> Both IAM authentication and logical replication must be enabled on your publisher Aurora PostgreSQL DB cluster. If either one isn't enabled, you can't use IAM authentication for replication connections.

Enabling IAM authentication for replication connections

Complete the following steps to enable IAM authentication for replication connection.

1. Verify that your Aurora PostgreSQL DB cluster meets all prerequisites for IAM authentication with replication connections. For details, see Prerequisites.
2. Configure the `rds.iam_auth_for_replication` parameter by modifying your DB cluster parameter group:
   - Set the `rds.iam_auth_for_replication` parameter to 1. This dynamic parameter doesn't require a reboot.
3. Connect to your database and grant the necessary roles to your replication user:

The following SQL commands grant the necessary roles to enable IAM authentication for replication connections:

```
-- Grant IAM authentication role
GRANT rds_iam TO replication_user_name;
-- Grant replication privileges
ALTER USER replication_user_name WITH REPLICATION;
```

After you complete these steps, the specified user must use IAM authentication for replication connections.

> **Important**
>
> When you enable the feature, users with both `rds_iam` and `rds_replication` roles must use IAM authentication for replication connections. This applies whether the roles are assigned directly to the user or inherited through other roles.

Disabling IAM authentication for replication connections

You can disable IAM authentication for replication connections by using any of the following methods:

- Set the `rds.iam_auth_for_replication` parameter to `0` in your DB cluster parameter group
- Alternatively, you can disable either of these features on your Aurora PostgreSQL DB cluster:
  - Disable logical replication by setting the `rds.logical_replication` parameter to `0`
  - Disable IAM authentication

When you disable the feature, replication connections can use database passwords for authentication if configured.

> **Note**
>
> Replication connections for users without the `rds_iam` role can use password authentication even when the feature is enabled.

Limitations and considerations

The following limitations and considerations apply when using IAM authentication for replication connections.

- IAM authentication for replication connections is only available for Aurora PostgreSQL versions 11 and higher.
- The publisher must support IAM authentication for replication connections.
- The IAM authentication token expires after 15 minutes by default. You might need to refresh long-running replication connections before the token expires.

> **Note**
>
> Aurora PostgreSQL doesn't support Kerberos authentication for logical replication connections. Use standard (password-based) or IAM authentication instead.

Local write forwarding in Aurora PostgreSQL

Local (in-cluster) write forwarding allows your applications to issue read/write transactions directly on an Aurora Replica. The write commands are then forwarded to the writer DB instance to be committed. You can use local write forwarding for your applications that have occasional writes and require *read-after-write consistency*, which is the ability to read the latest write in a transaction.

Without write forwarding, your applications must fully split all read and write traffic, maintaining two sets of database connections to send the traffic to the appropriate endpoint. Read replicas receive updates asynchronously from the writer instance. In addition, because replication lag can differ among read replicas, achieving global read consistency across all replicas is difficult. You must transact any reads requiring read-after-write consistency on the writer database instance. Alternatively, you would need to develop complex custom application logic to take advantage of multiple read replicas for scalability while ensuring consistency.

With write forwarding, you avoid the need to split those transactions or send them exclusively to the writer instance. You also don't have to develop complex application logic to achieve *read-after-write consistency* consistency.

Local write forwarding is available in every Region where Aurora PostgreSQL is available. It is supported in the following Aurora PostgreSQL versions:

- 16.4 and higher 16 versions
- 15.8 and higher 15 versions
- 14.13 and higher 14 versions

Local write forwarding is used to forward writes from in-Region replicas. To forward writes from a global replica, see Using write forwarding in an Amazon Aurora global database.

Topics

- Limitations and considerations of local write forwarding in Aurora PostgreSQL
- Configuring Aurora PostgreSQL for Local write forwarding
- Working with local write forwarding for Aurora PostgreSQL
- Monitoring local write forwarding in Aurora PostgreSQL

Limitations and considerations of local write forwarding in Aurora PostgreSQL

The following limitations currently apply to local write forwarding in Aurora PostgreSQL:

- Local write forwarding is not supported with RDS Proxy.
- Certain statements aren't allowed or can produce stale results when you use them in Aurora PostgreSQL with write forwarding. In addition, user defined functions and user defined procedures aren't supported. Thus, the `EnableLocalWriteForwarding` setting is turned off by default for DB clusters. Before turning it on, check to make sure that your application code isn't affected by any of these restrictions.
- The following kinds of SQL statements aren't supported with write forwarding:

> **Note**
>
> These statements can be implicitly used by you in your application or inferred by the PostgreSQL protocol. For example, PL/SQL exception handling can result in the use of SAVEPOINT, which is not a supported statement.

- ANALYZE
- CLUSTER
- COPY
- Cursors – Cursors aren't supported, so make sure to close them before using local write forwarding.
- Data definition language (DDL) statements
- GRANT|REVOKE|REASSIGN OWNED|SECURITY LABEL
- LISTEN / NOTIFY
- LOCK
- SAVEPOINT
- SELECT INTO
- SET CONSTRAINTS
- Sequence updates: nextval(), setval()
- TRUNCATE
- Two-phase commit commands: PREPARE TRANSACTION, COMMIT PREPARED, ROLLBACK PREPARED
- User defined functions and user defined procedures.
- VACUUM

You can consider using the following SQL statements with write forwarding:

- A DML statement might consist of multiple parts, such as an INSERT ... SELECT statement or a DELETE ... WHERE statement. In this case, the entire statement is forwarded to the writer DB instance and run there.
- Data manipulation language (DML) statements, such as INSERT, DELETE, and UPDATE.
- EXPLAIN statements with the statements in this list.
- PREPARE and EXECUTE statements.
- SELECT FOR { UPDATE | NO KEY UPDATE | SHARE | KEY SHARE } statements.

Configuring Aurora PostgreSQL for Local write forwarding

Using the following sections, you can enable local write forwarding for your Amazon Aurora PostgreSQL DB cluster, configuring consistency levels, and managing transactions with write forwarding.

Enabling local write forwarding

By default, local write forwarding isn't enabled for Aurora PostgreSQL DB clusters. You enable local write forwarding at the cluster level, not at the instance level.

Console

Using the Amazon Web Services Management Console, select the **Turn on local write forwarding** check box under **Read replica write forwarding** when you create or modify a DB cluster.

Amazon CLI

To enable local write forwarding with the Amazon CLI, use the `--enable-local-write-forwarding` option. This option works when you create a new DB cluster using the `create-db-cluster` command. It also works when you modify an existing DB cluster using the `modify-db-cluster` command. You can disable local write forwarding by using the `--no-enable-local-write-forwarding` option with these same CLI commands.

The following example creates an Aurora PostgreSQL DB cluster with local write forwarding enabled.

```
aws rds create-db-cluster \
--db-cluster-identifier write-forwarding-test-cluster \
--enable-local-write-forwarding \
--engine aurora-postgresql \
--engine-version 16.4 \
--master-username myuser \
--master-user-password mypassword \
--backup-retention 1
```

You then create writer and reader DB instances so that you can use write forwarding. For more information, see Creating an Amazon Aurora DB cluster.

RDS API

To enable local write forwarding using the Amazon RDS API, set the `EnableLocalWriteForwarding` parameter to `true`. This parameter works when you create a new DB cluster using the `CreateDBCluster` operation. It also works when you modify an existing DB cluster using the `ModifyDBCluster` operation. You can disable local write forwarding by setting the `EnableLocalWriteForwarding` parameter to `false`.

Enabling local write forwarding for database sessions

The `apg_write_forward.consistency_mode` parameter is a DB parameter and DB cluster parameter that enables write forwarding. You can specify `SESSION`, `EVENTUAL`, `GLOBAL`, or `OFF` for the read consistency level. To learn more about consistency levels, see Consistency and isolation for local write forwarding in Aurora PostgreSQL.

The following rules apply to this parameter:

- The default value is `SESSION`.
- Local write forwarding is available only if you set `apg_write_forward.consistency_mode` to `EVENTUAL`, `SESSION`, or `GLOBAL`. This parameter is relevant only in reader instances of DB clusters that have local write forwarding enabled.
- Setting the value to `OFF` disables local write forwarding in the session.

Consistency and isolation for local write forwarding in Aurora PostgreSQL

You can control the degree of read consistency on a read replica. You can adjust the read consistency level to ensure that all forwarded write operations from your session are visible in the read replica before any subsequent queries. You can also use this setting to ensure that queries on the read replica always see the most current updates from the writer DB instance. This is so even for those submitted by other sessions or other clusters. To specify this type of behavior for your application, you choose the appropriate value for the session-level parameter `apg_write_forward.consistency_mode`. The `apg_write_forward.consistency_mode` parameter has an effect only on read replicas that have local write forwarding enabled.

> **Note**
>
> For the `apg_write_forward.consistency_mode` parameter, you can specify the value `SESSION`, `EVENTUAL`, `GLOBAL`, or `OFF`. By default, the value is set to `SESSION`. Setting the value to `OFF` disables write forwarding.

As you increase the consistency level, your application spends more time waiting for changes to be propagated to read replicas. You can choose the balance between lower latency and ensuring that changes made in other locations are fully available before your queries run.

With each available consistency mode setting, the effect is as follows:

- `SESSION` – A session on a read replica that uses local write forwarding see the results of all changes made in that session. The changes are visible regardless of whether the transaction is committed. If necessary, the query waits for the results of forwarded write operations to be replicated to the current reader DB instance. It doesn't wait for updated results from write operations performed in other sessions within the current DB cluster.
- `EVENTUAL` – A session on a read replica that uses local write forwarding might see data that is slightly stale due to replication lag. Results of write operations in the same session aren't visible until the write operation is performed on the writer DB instance and replicated to the read replica. The query doesn't wait for the updated results to be available. Thus, it might retrieve the older data or the updated data, depending on the timing of the statements and the amount of replication lag.
- `GLOBAL` – A session on a read replica sees changes made by that session. It also sees all committed changes from both the writer DB instance and other read replicas. Each query might wait for a period that varies depending on the amount of session lag. The query proceeds when the read replica is up-to-date with all committed data from the writer DB instance, as of the time that the query began.

  > **Note**
  >
  > The global consistency mode impacts the latency of queries executed within a session. It will perform a wait even when the session has not sent any write queries.

- `OFF` – Local write forwarding is disabled.

In sessions that use write forwarding, you can use the `REPEATABLE READ` and `READ COMMITTED` isolation levels. However, the `SERIALIZABLE` isolation level isn't supported.

For more information about all the parameters involved with write forwarding, see Default parameter settings for write forwarding.

Transaction access modes with write forwarding

If the transaction access mode is set to read only, local write forwarding isn't used. You can set the access mode to read write only while you're connected to a DB cluster and session that has local write forwarding enabled.

For more information on the transaction access modes, see SET TRANSACTION.

Working with local write forwarding for Aurora PostgreSQL

Using the following sections, you can check if a database cluster has local write forwarding enabled, view compatibility considerations, and see configurable parameters and authentication setup. This information equips you with the details to utilize local write forwarding feature in Aurora PostgreSQL effectively.

> **Note**
>
> When a writer instance in a cluster using local write forwarding is restarted, any active, forwarded transactions and queries on reader instances using local write forwarding are automatically closed. After the writer instance is available again, you can retry these transactions.

Checking if a DB cluster has local write forwarding enabled

To determine that you can use local write forwarding in a DB cluster, confirm that the cluster has the attribute `LocalWriteForwardingStatus` set to `enabled`.

In the Amazon Web Services Management Console, on the **Configuration** tab of the details page for the cluster, you see the status **Enabled** for **Local read replica write forwarding**.

To see the status of the local write forwarding setting for all of your clusters, run the following Amazon CLI command.

Example

```
aws rds describe-db-clusters \
--query '*[].
{DBClusterIdentifier:DBClusterIdentifier,LocalWriteForwardingStatus:LocalWriteForwardingStatus}

[
{
"LocalWriteForwardingStatus": "enabled",
"DBClusterIdentifier": "write-forwarding-test-cluster-1"
},
{
"LocalWriteForwardingStatus": "disabled",
"DBClusterIdentifier": "write-forwarding-test-cluster-2"
},
{
"LocalWriteForwardingStatus": "requested",
"DBClusterIdentifier": "test-global-cluster-2"
},
{
"LocalWriteForwardingStatus": "null",
"DBClusterIdentifier": "aurora-postgresql-v2-cluster"
}
]
```

A DB cluster can have the following values for `LocalWriteForwardingStatus`:

- `disabled` – Local write forwarding is disabled.
- `disabling` – Local write forwarding is in the process of being disabled.
- `enabled` – Local write forwarding is enabled.
- `enabling` – Local write forwarding is in the process of being enabled.
- `null` – Local write forwarding isn't available for this DB cluster.
- `requested` – Local write forwarding has been requested, but is not yet active.

Default parameter settings for write forwarding

The Aurora cluster parameter groups include settings for the local write forwarding feature. Because these are cluster parameters, all DB instances in each cluster have the same values for

these variables. Details about these parameters are summarized in the following table, with usage notes after the table.

Parameter	Scope	Type	Default value	Valid values
apg_write_forward.connect_timeout	Session	seconds	30	0–2147483647
apg_write_forward.consistency_mode	Session	enum	Session	SESSION, EVENTUAL, GLOBAL, and OFF
apg_write_forward.idle_in_transaction_session_timeout	Session	milliseconds	86400000	0–2147483647
apg_write_forward.idle_session_timeout	Session	milliseconds	300000	0–2147483647
apg_write_forward.max_forwarding_connections_percent	Global	int	25	1–100

The apg_write_forward.max_forwarding_connections_percent parameter is the upper limit on database connection slots that can be used to handle queries forwarded from readers. It is expressed as a percentage of the max_connections setting for the writer DB instance. For example, if max_connections is 800 and apg_write_forward.max_forwarding_connections_percent is 10, then the writer allows a maximum of 80 simultaneous forwarded sessions. These connections come from the same connection pool managed by the max_connections setting. This setting applies only on the writer DB instance when the cluster has local write forwarding enabled.

Use the following settings to control local write forwarding requests:

- `apg_write_forward.consistency_mode` – A session-level parameter that controls the degree of read consistency on a read replica. Valid values are `SESSION`, `EVENTUAL`, `GLOBAL`, or `OFF`. By default, the value is set to `SESSION`. Setting the value to `OFF` disables local write forwarding in the session. To learn more about consistency levels, see Consistency and isolation for local write forwarding in Aurora PostgreSQL. This parameter is relevant only in reader instances that have local write forwarding enabled.
- `apg_write_forward.connect_timeout` – The maximum number of seconds the read replica waits when establishing a connection to the writer DB instance before giving up. A value of `0` means to wait indefinitely.
- `apg_write_forward.idle_in_transaction_session_timeout` – The number of milliseconds the writer DB instance waits for activity on a connection that's forwarded from a read replica that has an open transaction before closing it. If the session remains idle in transaction beyond this period, Aurora terminates the session. A value of `0` disables the timeout.
- `apg_write_forward.idle_session_timeout` – The number of milliseconds the writer DB instance waits for activity on a connection that's forwarded from a read replica before closing it. If the session remains idle beyond this period, Aurora terminates the session. A value of `0` disables the timeout.

rdswriteforwarduser

The `rdswriteforwarduser` is a user that we will use to establish a connection between the read replica and the writer DB instance.

> **Note**
>
> `rdswriteforwarduser` inherits its CONNECT privileges to customer databases via the PUBLIC role. If the privileges for the PUBLIC role are revoked, you will need to GRANT CONNECT privileges for the databases you need to forward writes to.

Monitoring local write forwarding in Aurora PostgreSQL

Using the following sections you can monitor local write forwarding in Aurora PostgreSQL clusters, including relevant CloudWatch metrics and wait events to track performance and identify potential issues.

Amazon CloudWatch metrics and Aurora PostgreSQL status variables for write forwarding

The following Amazon CloudWatch metrics apply to the writer DB instances when you use write forwarding on one or more read replicas.

CloudWatch Metric	Units and description
`AuroraLocal ForwardingWriterDML Throughput`	Count (per second). Number of forwarded DML statements processed each second by this writer DB instance.
`AuroraLocalForwardingWriter OpenSessions`	Count. Number of open sessions on this writer DB instance processing forwarded queries.
`AuroraLocal ForwardingWriterTo talSessions`	Count. Total number of forwarded sessions on this writer DB instance.

The following CloudWatch metrics apply to each read replica. These metrics are measured on each reader DB instance in the DB cluster with local write forwarding enabled.

CloudWatch Metric	Unit and description
`AuroraForwardingReplicaCommitThro ughput`	Count (per second). Number of commits in sessions forwarded by this replica each seco nd.
`AuroraForwardingReplicaDMLL atency`	Milliseconds. Average response time in milliseconds of forwarded DMLs on replica.
`AuroraForwardingReplicaDMLThrough put`	Count (per second). Number of forwarded DML statements processed on this replica each second.
`AuroraForwardingReplicaErrorSessi onsLimit`	Count. Number of sessions rejected by the writer DB instance because the limit for max

CloudWatch Metric	Unit and description
	connections or max write forward connections was reached.
`AuroraForwardingReplicaOpenSessions`	Count. The number of sessions that are using local write forwarding on a replica instance.
`AuroraForwardingReplicaReadWaitLatency`	Milliseconds. Average wait time in milliseconds that the replica waits to be consistent with the LSN of the writer DB instance. The degree to which the reader DB instance waits depends on the `apg_write_forward.consistency_mode` setting. For information about this setting, see the section called "Configuration parameters for write forwarding in Aurora PostgreSQL".

Wait events for local write forwarding in Aurora PostgreSQL

Amazon Aurora generates the following wait events when you use write forwarding with Aurora PostgreSQL.

Topics

- IPC:AuroraWriteForwardConnect
- IPC:AuroraWriteForwardConsistencyPoint
- IPC:AuroraWriteForwardExecute
- IPC:AuroraWriteForwardGetGlobalConsistencyPoint
- IPC:AuroraWriteForwardXactAbort
- IPC:AuroraWriteForwardXactCommit
- IPC:AuroraWriteForwardXactStart

IPC:AuroraWriteForwardConnect

The `IPC:AuroraWriteForwardConnect` event occurs when a backend process on the read replica is waiting for a connection to the writer DB instance to be opened.

Likely causes of increased waits

This event increases as the number of connection attempts from a read replica to the writer node increases.

Actions

Reduce the number of simultaneous connections from a read replica to the writer node.

IPC:AuroraWriteForwardConsistencyPoint

The `IPC:AuroraWriteForwardConsistencyPoint` event describes how long a query from a node on the read replica will wait for the results of forwarded write operations to be replicated to the current Region. This event is only generated if the session-level parameter `apg_write_forward.consistency_mode` is set to one of the following:

- `SESSION` – queries on a read replica wait for the results of all changes made in that session.
- `GLOBAL` – queries on a read replica wait for the results of changes made by that session, plus all committed changes from both the writer DB instance and read replica.

For more information about the `apg_write_forward.consistency_mode` parameter settings, see the section called “Configuration parameters for write forwarding in Aurora PostgreSQL”.

Likely causes of increased waits

Common causes for longer wait times include the following:

- Increased replica lag, as measured by the Amazon CloudWatch `ReplicaLag` metric. For more information about this metric, see Monitoring Aurora PostgreSQL replication.
- Increased load on the writer DB instance or read replica.

Actions

Change your consistency mode, depending on your application's requirements.

IPC:AuroraWriteForwardExecute

The `IPC:AuroraWriteForwardExecute` event occurs when a backend process on the read replica is waiting for a forwarded query to complete and obtain results from the writer node of the DB cluster.

Likely causes of increased waits

Common causes for increased waits include the following:

- Fetching a large number of rows from the writer node.
- Increased network latency between the writer node and read replica increases the time it takes the read replica to receive data from the writer node.
- Increased load on the read replica can delay transmission of the query request from the read replica to the writer node.
- Increased load on the writer node can delay transmission of data from the writer node to the read replica.

Actions

We recommend different actions depending on the causes of your wait event.

- Optimize queries to retrieve only necessary data.
- Optimize data manipulation language (DML) operations to only modify necessary data.
- If the read replica or writer node is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

IPC:AuroraWriteForwardGetGlobalConsistencyPoint

The `IPC:AuroraWriteForwardGetGlobalConsistencyPoint` event occurs when a backend process on the read replica that's using the GLOBAL consistency mode is waiting to obtain the global consistency point from the writer node before executing a query.

Likely causes of increased waits

Common causes for increased waits include the following:

- Increased network latency between the read replica and writer node increases the time it takes the read replica to receive data from the writer node.
- Increased load on the read replica can delay transmission of the query request from the read replica to the writer node.
- Increased load on the writer node can delay transmission of data from the writer node to the read replica.

Actions

We recommend different actions depending on the causes of your wait event.

- Change your consistency mode, depending on your application's requirements.
- If the read replica or writer node is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

IPC:AuroraWriteForwardXactAbort

The `IPC:AuroraWriteForwardXactAbort` event occurs when a backend process on the read replica is waiting for the result of a remote cleanup query. Cleanup queries are issued to return the process to the appropriate state after a write-forwarded transaction is aborted. Amazon Aurora performs them either because an error was found or because an user issued an explicit `ABORT` command or cancelled a running query.

Likely causes of increased waits

Common causes for increased waits include the following:

- Increased network latency between the read replica and writer node increases the time it takes the read replica to receive data from the writer node.
- Increased load on the read replica can delay transmission of the cleanup query request from the read replica to the writer node.
- Increased load on the writer node can delay transmission of data from the writer node to the read replica.

Actions

We recommend different actions depending on the causes of your wait event.

- Investigate the cause of the aborted transaction.
- If the read replica or writer DB instance is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

IPC:AuroraWriteForwardXactCommit

The `IPC:AuroraWriteForwardXactCommit` event occurs when a backend process on the read replica is waiting for the result of a forwarded commit transaction command.

Likely causes of increased waits

Common causes for increased waits include the following:

- Increased network latency between the read replica and writer node increases the time it takes the read replica to receive data from the writer node.
- Increased load on the read replica can delay transmission of the query request from the read replica to the writer node.
- Increased load on the writer node can delay transmission of data from the writer node to the read replica.

Actions

If the read replica or writer node is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

IPC:AuroraWriteForwardXactStart

The `IPC:AuroraWriteForwardXactStart` event occurs when a backend process on the read replica is waiting for the result of a forwarded start transaction command.

Likely causes of increased waits

Common causes for increased waits include the following:

- Increased network latency between the read replica and writer node increases the time it takes the read replica to receive data from the writer node.
- Increased load on the read replica can delay transmission of the query request from the read replica to the writer node.
- Increased load on the writer node can delay transmission of data from the writer node to the read replica.

Actions

If the read replica or writer node is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

Using Aurora PostgreSQL as a Knowledge Base for Amazon Bedrock

You can use an Aurora PostgreSQL DB cluster as a Knowledge Base for Amazon Bedrock. For more information, see Create a vector store in Amazon Aurora. A Knowledge Base automatically takes unstructured text data stored in an Amazon S3 bucket, converts it to text chunks and vectors, and stores it in a PostgreSQL database. With the generative AI applications, you can use Agents for Amazon Bedrock to query the data stored in the Knowledge Base and use the results of those queries to augment answers provided by foundational models. This workflow is called Retrieval Augmented Generation (RAG). For more information on RAG, see Retrieval Augmented Generation (RAG).

For detailed information about using Aurora PostgreSQL to build generative AI applications using RAG, see this blog post.

Topics

- Prerequisites
- Preparing Aurora PostgreSQL to be used as a Knowledge Base for Amazon Bedrock
- Creating a Knowledge Base in the Bedrock console
- Quick create an Aurora PostgreSQL Knowledge Base for Amazon Bedrock

Prerequisites

Familiarize yourself with the following prerequisites to use Aurora PostgreSQL cluster as a Knowledge Base for Amazon Bedrock. At a high level, you need to configure the following services for use with Bedrock:

- An Amazon Aurora PostgreSQL DB cluster that supports `pgvector` 0.5.0 or higher. The following Aurora PostgreSQL versions include `pgvector` 0.5.0 or higher:
  - All versions of Aurora PostgreSQL 16 and later major versions
  - Aurora PostgreSQL 15: 15.4 and higher versions
  - Aurora PostgreSQL 14: 14.9 and higher versions

- Aurora PostgreSQL 13: 13.12 and higher versions

> **Note**
>
> You must enable the `pgvector` extension in your target database and use version 0.5.0 or higher. For more information, see pgvector v0.5.0 with HNSW indexing.

- RDS Data API enabled on the DB cluster. For more information about the supported Amazon Web Services Regions and Aurora PostgreSQL versions, see Supported Regions and Aurora DB engines for RDS Data API.
- A user managed in Amazon Secrets Manager. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager.

Preparing Aurora PostgreSQL to be used as a Knowledge Base for Amazon Bedrock

Follow the steps explained in the below sections to prepare Aurora PostgreSQL to be used as a Knowledge Base for Amazon Bedrock.

Creating and configuring Aurora PostgreSQL

To configure Amazon Bedrock with an Aurora PostgreSQL DB cluster, you must first create an Aurora PostgreSQL DB cluster and take note of the important fields for configuring it with Amazon Bedrock. For more information about creating Aurora PostgreSQL DB cluster, see Creating and connecting to an Aurora PostgreSQL DB cluster.

- Enable Data API while creating Aurora PostgreSQL DB cluster. For more information on the versions supported, see Using the Amazon RDS Data API.
- Make sure to note down the Amazon Resource Names (ARN) of your Aurora PostgreSQL DB cluster. You'll need it to configure the DB cluster for use with Amazon Bedrock. For more information, see Amazon Resource Names (ARNs).

Connecting to a database and installing pgvector

You can connect to Aurora PostgreSQL using any of the connection utilities. For more detailed information on these utilities, see Connecting to an Amazon Aurora PostgreSQL DB cluster.

Alternatively, you can use the RDS console query editor to run the queries. You need an Aurora DB cluster with the RDS Data API enabled to use the query editor.

1. Log in to the database with your master user and set up pgvector. Use the following command if the extension is not installed:

   ```
   CREATE EXTENSION IF NOT EXISTS vector;
   ```

   Use `pgvector` 0.5.0 and higher version that supports HNSW indexing. For more information, see pgvector v0.5.0 with HNSW indexing.

2. Use the following command to check the version of the `pg_vector` installed:

   ```
   SELECT extversion FROM pg_extension WHERE extname='vector';
   ```

Setting up database objects and privileges

1. Create a specific schema that Bedrock can use to query the data. Use the following command to create a schema:

   ```
   CREATE SCHEMA bedrock_integration;
   ```

2. Create a new role that Bedrock can use to query the database. Use the following command to create a new role:

   ```
   CREATE ROLE bedrock_user WITH PASSWORD 'password' LOGIN;
   ```

   > **Note**
   >
   > Make a note of this password as you will need it later to create a Secrets Manager password.

   If you are using `psql` client, then use the following commands to create a new role:

   ```
   CREATE ROLE bedrock_user LOGIN;
   \PASSWORD password;
   ```

3. Grant the bedrock_user permissions to manage the bedrock_integration schema. This will provide the ability to create tables or indexes within the schema.

```
GRANT ALL ON SCHEMA bedrock_integration to bedrock_user;
```

4. Login as the bedrock_user and create a table in the bedrock_integration schema.

```
CREATE TABLE bedrock_integration.bedrock_kb (id uuid PRIMARY KEY, embedding
 vector(n), chunks text, metadata json, custom_metadata jsonb);
```

This command will create the bedrock_kb table in the bedrock_integration schema with Titan embeddings.

Replace n in the vector(*n*) data type with the appropriate dimension for the embedding model you are using. Use the recommendations below to help select your dimensions:

- For the Titan v2 model, use vector(1024), or vector(512), or vector (256). To learn more, see Amazon Titan Embeddings Text.
- For the Titan v1.2 model, use vector(1536). To learn more, see Amazon Titan Multimodal Embeddings G1.
- For the Cohere Embed model, use vector(1024). To learn more, see Cohere Embed models.
- For the Cohere Embed Multilingual v3, use vector(1024).

The first four columns are mandatory. For metadata handling, Bedrock writes data from your metadata files to the custom_metadata column. We recommend creating this column if you plan to use metadata and filtering. If you don't create a custom_metadata column, add individual columns for each metadata attribute in your table before you begin ingestion. For more information, see Configure and customize queries and response generation.

5. Follow these steps to create the required indexes that Bedrock uses to query your data:

- Create an index with the cosine operator which the bedrock can use to query the data.

```
CREATE INDEX ON bedrock_integration.bedrock_kb USING hnsw (embedding
 vector_cosine_ops);
```

- We recommend you to set the value of ef_construction to 256 for pgvector 0.6.0 and higher version that use parallel index building.

```
CREATE INDEX ON bedrock_integration.bedrock_kb USING hnsw (embedding
 vector_cosine_ops) WITH (ef_construction=256);
```

- Create an index which Bedrock can use to query the text data.

```
CREATE INDEX ON bedrock_integration.bedrock_kb USING gin (to_tsvector('simple',
 chunks));
```

- If you created a column for custom metadata, create an index which Bedrock can use to query the metadata.

```
CREATE INDEX ON bedrock_integration.bedrock_kb USING gin (custom_metadata);
```

Create a secret in Secrets Manager

Secrets Manager lets you store your Aurora credentials so that they can be securely transmitted to applications. If you didn't choose the Amazon secrets manager option when creating Aurora PostgreSQL DB cluster, you can create a secret now. For more information about creating Amazon Secrets Manager database secret, see Amazon Secrets Manager database secret.

Creating a Knowledge Base in the Bedrock console

While preparing Aurora PostgreSQL to be used as the vector store for a Knowledge Base, you must gather the following details that you need to provide to Amazon Bedrock console.

- **Amazon Aurora DB cluster ARN** – The ARN of your DB cluster.
- **Secret ARN** – The ARN of the Amazon Secrets Manager key for your DB cluster.
- **Database name** – The name of your database. For example, you can use the default database *`postgres`*.
- **Table name** – We recommend you to provide a schema qualified name while creating the table using the command similar to the following:

```
CREATE TABLE bedrock_integration.bedrock_kb;
```

  This command will create the `bedrock_kb` table in the `bedrock_integration` schema.

- When creating the table, make sure to configure it with the specified columns and data types. You can use your preferred column names instead of those listed in the table. Remember to take a note of the names you chose for reference during the Knowledge Base set up.

Column name	Data type	Description
id	UUID primary key	Contains unique identifiers for each record.
chunks	Text	Contains the chunks of raw text from your data sources.
embedding	Vector	Contains the vector embeddings of the data sources.
metadata	JSON	Contains metadata required to carry out source attributi on and to enable data ingestion and querying.
custom_metadata	JSONB	(Optional) Defines the target column where Amazon Bedrock writes metadata details from your data sources.

With these details, you can now create a Knowledge Base in the Bedrock console. For more detailed information on setting up a vector index and creating a Knowledge Base information, see Create a vector store in Amazon Aurora and Create a vector store in Amazon Aurora.

After adding Aurora as your Knowledge Base, you can now ingest your data sources for searching and querying. For more information, see Ingest your data sources into the Knowledge Base.

Quick create an Aurora PostgreSQL Knowledge Base for Amazon Bedrock

The Amazon Bedrock retrieval augmented generation (RAG) workflow relies on vector data stored in an Aurora PostgreSQL database to power content retrieval. Previously, setting up Aurora PostgreSQL as the vector data store for Bedrock Knowledge Bases was a multi-step process, requiring numerous manual actions across different user interfaces. This made it challenging for data scientists and developers to leverage Aurora for their Bedrock projects.

To improve the user experience, Amazon has created a new CloudFormation-based quick create option that simplifies the setup process. With Aurora quick create, you can now provision a pre-configured Aurora PostgreSQL DB cluster as the vector store for your Amazon Bedrock Knowledge Bases with a single click.

Topics

- Supported regions and Aurora PostgreSQL versions
- Understanding the quick create process
- Benefits of using Aurora quick create
- Limitations of Aurora quick create process

Supported regions and Aurora PostgreSQL versions

The Aurora quick create option is available in all the Amazon regions that support Amazon Bedrock Knowledge Bases. By default, it creates an Aurora PostgreSQL DB cluster with version 15.7. For more information about supported Regions, see Supported models and regions for Amazon Bedrock Knowledge Bases.

Understanding the quick create process

The quick create process automatically provisions the following resources to set up an Amazon Aurora PostgreSQL database as the vector data store for your Bedrock Knowledge Base:

An Aurora PostgreSQL DB cluster in your account, configured with default settings.

- ACUs (Aurora Capacity Units) are set from 0 to 16. This lets your vector store scale down to zero when not in use, saving on compute costs. The ACUs can be adjusted later in the Amazon RDS console.

- (Hierarchical Navigable Small World) HNSW index using Euclidean distance as a similarity measure for the Bedrock vector embeddings stored in Aurora.
- The DB instance is a serverless v2 instance.
- The cluster is associated with the default VPC and subnets, and has the RDS Data API enabled.
- The cluster admin credentials are managed by Amazon Secrets Manager.

Besides the default settings, the following settings are set up for you. As you go through the process, you'll see screens that explains the workflow.

- Seeding the Aurora cluster with the necessary database objects:
  - Create the pgvector extension, schema, role, and tables required for the Bedrock Knowledge Base.
  - Register a limited-privilege database user for Bedrock to interact with the cluster.
- A progress banner will be displayed throughout the resource provisioning process, allowing you to track the status of the following sub-events:
  - Aurora cluster creation
  - Seeding the Aurora cluster
  - Knowledge Base creation

  The banner stays visible until the knowledge base is fully created, even if you navigate away from the page and return.
- You can click `View details` on the progress banner to see the status of each step. For more information about events during knowledge base creation, choose the CloudFormation link in the view details screen. Once the process is complete, your new Bedrock Knowledge Base will be ready to use.
- The stack IDs for all the quick create resources can be found in the tags of the Bedrock Knowledge Base, should you need to reference them.

A Bedrock Knowledge Base, with the configuration to the newly provisioned Aurora cluster as the vector store is created.

Benefits of using Aurora quick create

- The CloudFormation-based quick create process significantly reduces the time and complexity required to use Aurora as the vector store.

- Aurora offers excellent performance, vector scalability and cost benefits with the ability to scale to zero compute charges when not in use.
- The quick create process streamlines the end-to-end experience, allowing you to easily create and configure your Bedrock Knowledge Bases using Aurora.
- Customers can build upon CloudFormation template to customize the provisioning with their own configurations.

Limitations of Aurora quick create process

- With Aurora quick create option, the DB cluster is provisioned with default configurations. However, these default settings may not meet your specific requirements or intended use case. Quick create does not offer options to modify the configurations during the provisioning process. The configurations are set automatically to streamline the deployment experience. If you need to customize the Aurora DB cluster configuration, you can do so after the initial deployment by quick create in the Amazon RDS console.
- While quick create flow simplifies the setup process, the time to create the Aurora DB cluster is still approximately 10 minutes, the same as a manual deployment. This is due to the time required to provision the Aurora infrastructure.
- The quick create option is designed for experimentation and quick setup. The resources created through quick create may not be suitable for production use, and you won't be able to directly migrate them to a production environment in your VPC.

Integrating Amazon Aurora PostgreSQL with other Amazon services

Amazon Aurora integrates with other Amazon services so that you can extend your Aurora PostgreSQL DB cluster to use additional capabilities in the Amazon Cloud. Your Aurora PostgreSQL DB cluster can use Amazon services to do the following:

- Quickly collect, view, and assess performance for your Aurora PostgreSQL DB instances with Amazon RDS Performance Insights. Performance Insights expands on existing Amazon RDS monitoring features to illustrate your database's performance and help you analyze any issues that affect it. With the Performance Insights dashboard, you can visualize the database load and filter the load by waits, SQL statements, hosts, or users. For more information about

Performance Insights, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

- Configure your Aurora PostgreSQL DB cluster to publish log data to Amazon CloudWatch Logs. CloudWatch Logs provide highly durable storage for your log records. With CloudWatch Logs, you can perform real-time analysis of the log data, and use CloudWatch to create alarms and view metrics. For more information, see Publishing Aurora PostgreSQL logs to Amazon CloudWatch Logs.
- Import data from an Amazon S3 bucket to an Aurora PostgreSQL DB cluster, or export data from an Aurora PostgreSQL DB cluster to an Amazon S3 bucket. For more information, see Importing data from Amazon S3 into an Aurora PostgreSQL DB cluster and Exporting data from an Aurora PostgreSQL DB cluster to Amazon S3.
- Add machine learning-based predictions to database applications using the SQL language. Aurora machine learning uses a highly optimized integration between the Aurora database and the Amazon machine learning (ML) services SageMaker AI and Amazon Comprehend. For more information, see Using Amazon Aurora machine learning with Aurora PostgreSQL.
- Invoke Amazon Lambda functions from an Aurora PostgreSQL DB cluster. To do this, use the `aws_lambda` PostgreSQL extension provided with Aurora PostgreSQL. For more information, see Invoking an Amazon Lambda function from an Aurora PostgreSQL DB cluster .
- Integrate queries from Amazon Redshift and Aurora PostgreSQL. For more information, see Getting started with using federated queries to PostgreSQL in the *Amazon Redshift Database Developer Guide*.

⚠ DNS resolution conflicts with Kerberos authentication and Amazon service VPC endpoints

Connections from your DB cluster to Amazon services may fail if you enable Kerberos authentication and configure VPC endpoints for those services in your Amazon Managed Microsoft AD VPC.

When you enable Kerberos authentication, your DB cluster prioritizes Amazon Managed Microsoft AD DNS servers over the VPC DNS resolver. If endpoint records for Amazon services (such as Lambda, Amazon S3, or SageMaker AI) exist in your Amazon Managed Microsoft AD DNS, the endpoints may resolve to IP addresses in your Active Directory VPC rather than your database VPC. This configuration prevents successful connections from your DB cluster to those services.

For more information, see Using Kerberos authentication with Aurora PostgreSQL.

Importing data from Amazon S3 into an Aurora PostgreSQL DB cluster

You can import data that's been stored using Amazon Simple Storage Service into a table on an Aurora PostgreSQL DB cluster instance. To do this, you first install the Aurora PostgreSQL `aws_s3` extension. This extension provides the functions that you use to import data from an Amazon S3 bucket. A *bucket* is an Amazon S3 container for objects and files. The data can be in a comma-separate value (CSV) file, a text file, or a compressed (gzip) file. Following, you can learn how to install the extension and how to import data from Amazon S3 into a table.

Your database must be running PostgreSQL version 10.7 or higher to import from Amazon S3 into Aurora PostgreSQL.

If you don't have data stored on Amazon S3, you need to first create a bucket and store the data. For more information, see the following topics in the *Amazon Simple Storage Service User Guide*.

- Create a bucket
- Add an object to a bucket

Cross-account import from Amazon S3 is supported. For more information, see Granting cross-account permissions in the *Amazon Simple Storage Service User Guide*.

You can use the customer managed key for encryption while importing data from S3. For more information, see KMS keys stored in Amazon KMS in the *Amazon Simple Storage Service User Guide*.

Note

Importing data from Amazon S3 isn't supported for Aurora Serverless v1. It is supported for Aurora serverless.

Topics

- Installing the aws_s3 extension
- Upgrading the aws_s3 extension
- Overview of importing data from Amazon S3 data

- Setting up access to an Amazon S3 bucket
- Importing data from Amazon S3 to your Aurora PostgreSQL DB cluster
- Function reference

Installing the aws_s3 extension

Before you can use Amazon S3 with your Aurora PostgreSQL DB cluster, you need to install the aws_s3 extension. This extension provides functions for importing data from an Amazon S3. It also provides functions for exporting data from an instance of an Aurora PostgreSQL DB cluster to an Amazon S3 bucket. For more information, see Exporting data from an Aurora PostgreSQL DB cluster to Amazon S3. The aws_s3 extension depends on some of the helper functions in the aws_commons extension, which is installed automatically when needed.

To install the aws_s3 extension

1. Use psql (or pgAdmin) to connect to the writer instance of your Aurora PostgreSQL DB cluster as a user that has rds_superuser privileges. If you kept the default name during the setup process, you connect as postgres.

```
psql --host=111122223333.aws-region.rds.amazonaws.com --port=5432 --
username=postgres --password
```

2. To install the extension, run the following command.

```
postgres=> CREATE EXTENSION aws_s3 CASCADE;
NOTICE: installing required extension "aws_commons"
CREATE EXTENSION
```

3. To verify that the extension is installed, you can use the psql \dx metacommand.

```
postgres=> \dx
       List of installed extensions
    Name     | Version |   Schema   |                 Description
-------------+---------+------------+---------------------------------------------
 aws_commons | 1.2     | public     | Common data types across Amazon services
 aws_s3      | 1.1     | public     | Amazon S3 extension for importing data from
 S3
 plpgsql     | 1.0     | pg_catalog | PL/pgSQL procedural language
(3 rows)
```

The functions for importing data from Amazon S3 and exporting data to Amazon S3 are now available to use.

Upgrading the aws_s3 extension

Upgrading your Aurora PostgreSQL DB cluster to a new version doesn't upgrade the `aws_s3` extension at the same time. To upgrade the extension after the engine upgrade completes, use the `ALTER EXTENSION ... UPDATE` command. For the general procedure, see Upgrading PostgreSQL extensions.

Overview of importing data from Amazon S3 data

To import S3 data into Aurora PostgreSQL

First, gather the details that you need to supply to the function. These include the name of the table on your Aurora PostgreSQL DB cluster's instance, and the bucket name, file path, file type, and Amazon Web Services Region where the Amazon S3 data is stored. For more information, see View an object in the *Amazon Simple Storage Service User Guide*.

> **Note**
>
> Multi part data import from Amazon S3 isn't currently supported.


1. Get the name of the table into which the `aws_s3.table_import_from_s3` function is to import the data. As an example, the following command creates a table `t1` that can be used in later steps.

   ```
   postgres=> CREATE TABLE t1
       (col1 varchar(80),
       col2 varchar(80),
       col3 varchar(80));
   ```

2. Get the details about the Amazon S3 bucket and the data to import. To do this, open the Amazon S3 console at https://console.amazonaws.cn/s3/, and choose **Buckets**. Find the bucket containing your data in the list. Choose the bucket, open its Object overview page, and then choose Properties.

   Make a note of the bucket name, path, the Amazon Web Services Region, and file type. You need the Amazon Resource Name (ARN) later, to set up access to Amazon S3 through an IAM

role. For more more information, see Setting up access to an Amazon S3 bucket. The image following shows an example.

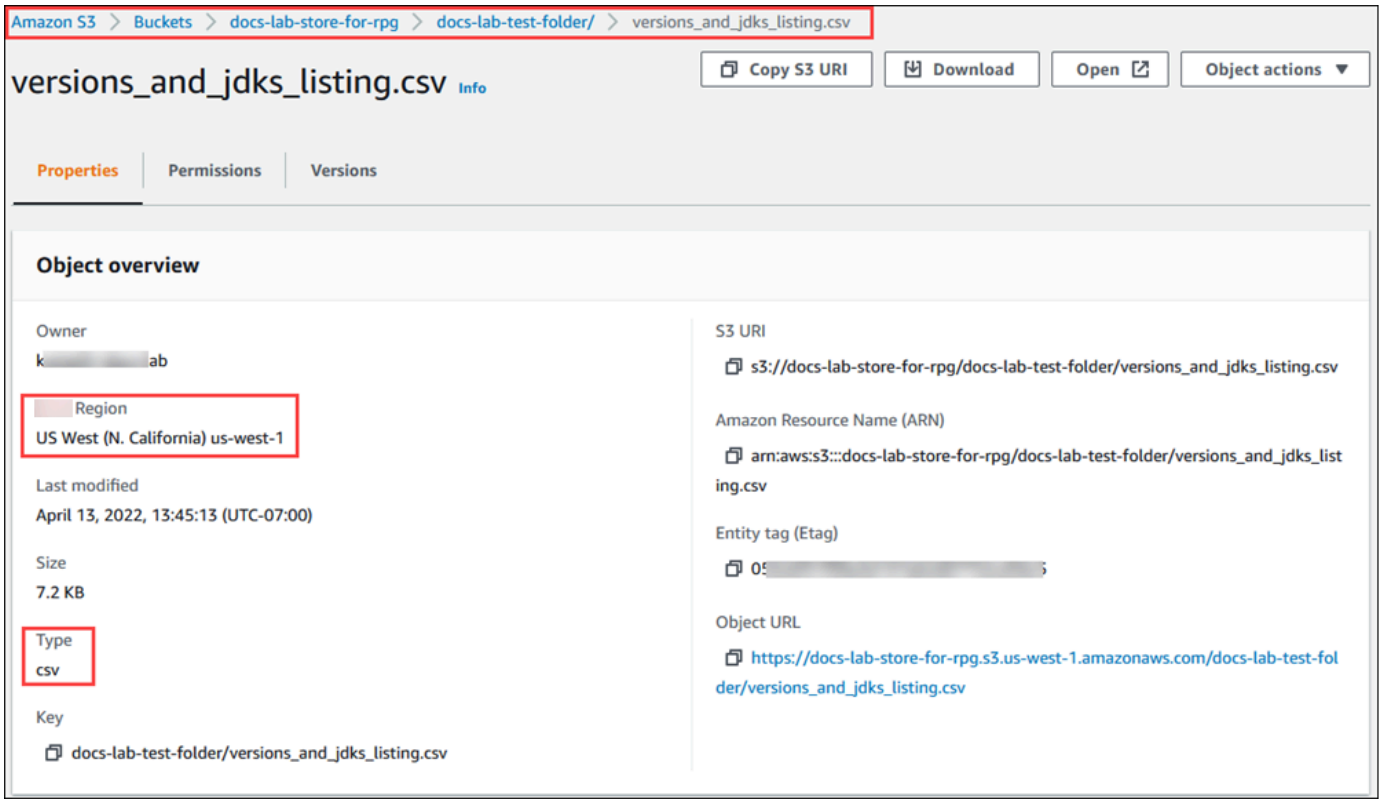

3. You can verify the path to the data on the Amazon S3 bucket by using the Amazon CLI command `aws s3 cp`. If the information is correct, this command downloads a copy of the Amazon S3 file.

```
aws s3 cp s3://amzn-s3-demo-bucket/sample_file_path ./
```

4. Set up permissions on your Aurora PostgreSQL DB cluster to allow access to the file on the Amazon S3 bucket. To do so, you use either an Amazon Identity and Access Management (IAM) role or security credentials. For more information, see Setting up access to an Amazon S3 bucket.

5. Supply the path and other Amazon S3 object details gathered (see step 2) to the `create_s3_uri` function to construct an Amazon S3 URI object. To learn more about this function, see aws_commons.create_s3_uri. The following is an example of constructing this object during a psql session.

```
postgres=> SELECT aws_commons.create_s3_uri(
   'docs-lab-store-for-rpg',
   'versions_and_jdks_listing.csv',
```

```
   'us-west-1'
) AS s3_uri \gset
```

In the next step, you pass this object (`aws_commons._s3_uri_1`) to the `aws_s3.table_import_from_s3` function to import the data to the table.

6. Invoke the `aws_s3.table_import_from_s3` function to import the data from Amazon S3 into your table. For reference information, see aws_s3.table_import_from_s3. For examples, see Importing data from Amazon S3 to your Aurora PostgreSQL DB cluster .

Setting up access to an Amazon S3 bucket

To import data from an Amazon S3 file, give the Aurora PostgreSQL DB cluster permission to access the Amazon S3 bucket containing the file. You provide access to an Amazon S3 bucket in one of two ways, as described in the following topics.

Topics

- Using an IAM role to access an Amazon S3 bucket
- Using security credentials to access an Amazon S3 bucket
- Troubleshooting access to Amazon S3

Using an IAM role to access an Amazon S3 bucket

Before you load data from an Amazon S3 file, give your Aurora PostgreSQL DB cluster permission to access the Amazon S3 bucket the file is in. This way, you don't have to manage additional credential information or provide it in the aws_s3.table_import_from_s3 function call.

To do this, create an IAM policy that provides access to the Amazon S3 bucket. Create an IAM role and attach the policy to the role. Then assign the IAM role to your DB cluster.

> **Note**
>
> You can't associate an IAM role with an Aurora Serverless v1 DB cluster, so the following steps don't apply.

To give an Aurora PostgreSQL DB cluster access to Amazon S3 through an IAM role

1. Create an IAM policy.

This policy provides the bucket and object permissions that allow your Aurora PostgreSQL DB cluster to access Amazon S3.

Include in the policy the following required actions to allow the transfer of files from an Amazon S3 bucket to Aurora PostgreSQL:

- `s3:GetObject`
- `s3:ListBucket`

Include in the policy the following resources to identify the Amazon S3 bucket and objects in the bucket. This shows the Amazon Resource Name (ARN) format for accessing Amazon S3.

- arn:aws-cn:s3:::*amzn-s3-demo-bucket*
- arn:aws-cn:s3:::*amzn-s3-demo-bucket*/*

For more information on creating an IAM policy for Aurora PostgreSQL, see Creating and using an IAM policy for IAM database access. See also Tutorial: Create and attach your first customer managed policy in the *IAM User Guide*.

The following Amazon CLI command creates an IAM policy named `rds-s3-import-policy` with these options. It grants access to a bucket named *amzn-s3-demo-bucket*.

> **Note**
>
> Make a note of the Amazon Resource Name (ARN) of the policy returned by this command. You need the ARN in a subsequent step when you attach the policy to an IAM role.

Example

For Linux, macOS, or Unix:

```
aws iam create-policy \
   --policy-name rds-s3-import-policy \
   --policy-document '{
     "Version": "2012-10-17",
```

```
    "Statement": [
      {
        "Sid": "s3import",
        "Action": [
          "s3:GetObject",
          "s3:ListBucket"
        ],
        "Effect": "Allow",
        "Resource": [
          "arn:aws-cn:s3:::amzn-s3-demo-bucket",
          "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
        ]
      }
    ]
  }'
```

For Windows:

```
aws iam create-policy ^
   --policy-name rds-s3-import-policy ^
   --policy-document '{
     "Version": "2012-10-17",
     "Statement": [
       {
         "Sid": "s3import",
         "Action": [
           "s3:GetObject",
           "s3:ListBucket"
         ],
         "Effect": "Allow",
         "Resource": [
           "arn:aws-cn:s3:::amzn-s3-demo-bucket",
           "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
         ]
       }
     ]
   }'
```

2. Create an IAM role.

   You do this so Aurora PostgreSQL can assume this IAM role to access your Amazon S3 buckets. For more information, see Creating a role to delegate permissions to an IAM user in the *IAM User Guide*.

We recommend using the aws:SourceArn and aws:SourceAccount global condition context keys in resource-based policies to limit the service's permissions to a specific resource. This is the most effective way to protect against the confused deputy problem.

If you use both global condition context keys and the aws:SourceArn value contains the account ID, the aws:SourceAccount value and the account in the aws:SourceArn value must use the same account ID when used in the same policy statement.

- Use aws:SourceArn if you want cross-service access for a single resource.
- Use aws:SourceAccount if you want to allow any resource in that account to be associated with the cross-service use.

In the policy, be sure to use the aws:SourceArn global condition context key with the full ARN of the resource. The following example shows how to do so using the Amazon CLI command to create a role named rds-s3-import-role.

Example

For Linux, macOS, or Unix:

```
aws iam create-role \
   --role-name rds-s3-import-role \
   --assume-role-policy-document '{
     "Version": "2012-10-17",
     "Statement": [
       {
         "Effect": "Allow",
         "Principal": {
            "Service": "rds.amazonaws.com"
          },
         "Action": "sts:AssumeRole",
         "Condition": {
             "StringEquals": {
                "aws:SourceAccount": "111122223333",
                "aws:SourceArn": "arn:aws:rds:us-
east-1:111122223333:cluster:clustername"
                }
             }
       }
     ]
```

```
   }'
```

For Windows:

```
aws iam create-role ^
   --role-name rds-s3-import-role ^
   --assume-role-policy-document '{
     "Version": "2012-10-17",
     "Statement": [
       {
         "Effect": "Allow",
         "Principal": {
            "Service": "rds.amazonaws.com"
          },
         "Action": "sts:AssumeRole",
         "Condition": {
             "StringEquals": {
                "aws:SourceAccount": "111122223333",
                "aws:SourceArn": "arn:aws:rds:us-
east-1:111122223333:cluster:clustername"
                }
             }
       }
     ]
   }'
```

3. Attach the IAM policy that you created to the IAM role that you created.

   The following Amazon CLI command attaches the policy created in the previous step to the role named `rds-s3-import-role` Replace *your-policy-arn* with the policy ARN that you noted in an earlier step.

   Example

   For Linux, macOS, or Unix:

```
aws iam attach-role-policy \
   --policy-arn your-policy-arn \
   --role-name rds-s3-import-role
```

   For Windows:

```
aws iam attach-role-policy ^
   --policy-arn your-policy-arn ^
   --role-name rds-s3-import-role
```

4. Add the IAM role to the DB cluster.

   You do so by using the Amazon Web Services Management Console or Amazon CLI, as described following.

Console

To add an IAM role for a PostgreSQL DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose the PostgreSQL DB cluster name to display its details.
3. On the **Connectivity & security** tab, in the **Manage IAM roles** section, choose the role to add under **Add IAM roles to this cluster** .
4. Under **Feature**, choose **s3Import**.
5. Choose **Add role**.

Amazon CLI

To add an IAM role for a PostgreSQL DB cluster using the CLI

- Use the following command to add the role to the PostgreSQL DB cluster named `my-db-cluster`. Replace *`your-role-arn`* with the role ARN that you noted in a previous step. Use `s3Import` for the value of the `--feature-name` option.

  Example

  For Linux, macOS, or Unix:

```
aws rds add-role-to-db-cluster \
   --db-cluster-identifier my-db-cluster \
   --feature-name s3Import \
   --role-arn your-role-arn   \
```

```
   --region your-region
```

For Windows:

```
aws rds add-role-to-db-cluster ^
   --db-cluster-identifier my-db-cluster ^
   --feature-name s3Import ^
   --role-arn your-role-arn ^
   --region your-region
```

RDS API

To add an IAM role for a PostgreSQL DB cluster using the Amazon RDS API, call the AddRoleToDBCluster operation.

Using security credentials to access an Amazon S3 bucket

If you prefer, you can use security credentials to provide access to an Amazon S3 bucket instead of providing access with an IAM role. You do so by specifying the `credentials` parameter in the aws_s3.table_import_from_s3 function call.

The `credentials` parameter is a structure of type `aws_commons._aws_credentials_1`, which contains Amazon credentials. Use the aws_commons.create_aws_credentials function to set the access key and secret key in an `aws_commons._aws_credentials_1` structure, as shown following.

```
postgres=> SELECT aws_commons.create_aws_credentials(
   'sample_access_key', 'sample_secret_key', '')
AS creds \gset
```

After creating the `aws_commons._aws_credentials_1` structure, use the aws_s3.table_import_from_s3 function with the `credentials` parameter to import the data, as shown following.

```
postgres=> SELECT aws_s3.table_import_from_s3(
   't', '', '(format csv)',
   :'s3_uri',
   :'creds'
);
```

Or you can include the aws_commons.create_aws_credentials function call inline within the aws_s3.table_import_from_s3 function call.

```
postgres=> SELECT aws_s3.table_import_from_s3(
   't', '', '(format csv)',
   :'s3_uri',
   aws_commons.create_aws_credentials('sample_access_key', 'sample_secret_key', '')
);
```

Troubleshooting access to Amazon S3

If you encounter connection problems when attempting to import data from Amazon S3, see the following for recommendations:

- Troubleshooting Amazon Aurora identity and access
- Troubleshooting Amazon S3 in the *Amazon Simple Storage Service User Guide*
- Troubleshooting Amazon S3 and IAM in the *IAM User Guide*

Importing data from Amazon S3 to your Aurora PostgreSQL DB cluster

You import data from your Amazon S3 bucket by using the table_import_from_s3 function of the aws_s3 extension. For reference information, see aws_s3.table_import_from_s3.

> **Note**
>
> The following examples use the IAM role method to allow access to the Amazon S3 bucket. Thus, the aws_s3.table_import_from_s3 function calls don't include credential parameters.

The following shows a typical example.

```
postgres=> SELECT aws_s3.table_import_from_s3(
   't1',
   '',
   '(format csv)',
   :'s3_uri'
);
```

The parameters are the following:

- `t1` – The name for the table in the PostgreSQL DB cluster to copy the data into.
- `''` – An optional list of columns in the database table. You can use this parameter to indicate which columns of the S3 data go in which table columns. If no columns are specified, all the columns are copied to the table. For an example of using a column list, see Importing an Amazon S3 file that uses a custom delimiter.
- `(format csv)` – PostgreSQL COPY arguments. The copy process uses the arguments and format of the PostgreSQL COPY command to import the data. Choices for format include comma-separated value (CSV) as shown in this example, text, and binary. The default is text.
- `s3_uri` – A structure that contains the information identifying the Amazon S3 file. For an example of using the aws_commons.create_s3_uri function to create an `s3_uri` structure, see Overview of importing data from Amazon S3 data.

For more information about this function, see aws_s3.table_import_from_s3.

The `aws_s3.table_import_from_s3` function returns text. To specify other kinds of files for import from an Amazon S3 bucket, see one of the following examples.

> **Note**
>
> Importing 0 bytes file will cause an error.

Topics

- Importing an Amazon S3 file that uses a custom delimiter
- Importing an Amazon S3 compressed (gzip) file
- Importing an encoded Amazon S3 file

Importing an Amazon S3 file that uses a custom delimiter

The following example shows how to import a file that uses a custom delimiter. It also shows how to control where to put the data in the database table using the `column_list` parameter of the aws_s3.table_import_from_s3 function.

For this example, assume that the following information is organized into pipe-delimited columns in the Amazon S3 file.

```
1|foo1|bar1|elephant1
2|foo2|bar2|elephant2
3|foo3|bar3|elephant3
4|foo4|bar4|elephant4
...
```

To import a file that uses a custom delimiter

1. Create a table in the database for the imported data.

   ```
   postgres=> CREATE TABLE test (a text, b text, c text, d text, e text);
   ```

2. Use the following form of the aws_s3.table_import_from_s3 function to import data from the Amazon S3 file.

   You can include the aws_commons.create_s3_uri function call inline within the `aws_s3.table_import_from_s3` function call to specify the file.

   ```
   postgres=> SELECT aws_s3.table_import_from_s3(
      'test',
      'a,b,d,e',
      'DELIMITER ''|''',
      aws_commons.create_s3_uri('amzn-s3-demo-bucket', 'pipeDelimitedSampleFile', 'us-
   east-2')
   );
   ```

The data is now in the table in the following columns.

```
postgres=> SELECT * FROM test;
a | b | c | d | e
---+------+---+---+------+-----------
1 | foo1 | | bar1 | elephant1
2 | foo2 | | bar2 | elephant2
3 | foo3 | | bar3 | elephant3
4 | foo4 | | bar4 | elephant4
```

Importing an Amazon S3 compressed (gzip) file

The following example shows how to import a file from Amazon S3 that is compressed with gzip. The file that you import needs to have the following Amazon S3 metadata:

- Key: `Content-Encoding`
- Value: `gzip`

If you upload the file using the Amazon Web Services Management Console, the metadata is typically applied by the system. For information about uploading files to Amazon S3 using the Amazon Web Services Management Console, the Amazon CLI, or the API, see Uploading objects in the *Amazon Simple Storage Service User Guide*.

For more information about Amazon S3 metadata and details about system-provided metadata, see Editing object metadata in the Amazon S3 console in the *Amazon Simple Storage Service User Guide*.

Import the gzip file into your Aurora PostgreSQL DB cluster as shown following.

```
postgres=> CREATE TABLE test_gzip(id int, a text, b text, c text, d text);
postgres=> SELECT aws_s3.table_import_from_s3(
 'test_gzip', '', '(format csv)',
 'amzn-s3-demo-bucket', 'test-data.gz', 'us-east-2'
);
```

Importing an encoded Amazon S3 file

The following example shows how to import a file from Amazon S3 that has Windows-1252 encoding.

```
postgres=> SELECT aws_s3.table_import_from_s3(
 'test_table', '', 'encoding ''WIN1252''',
 aws_commons.create_s3_uri('amzn-s3-demo-bucket', 'SampleFile', 'us-east-2')
);
```

Function reference

Functions

- aws_s3.table_import_from_s3
- aws_commons.create_s3_uri
- aws_commons.create_aws_credentials

aws_s3.table_import_from_s3

Imports Amazon S3 data into an Aurora PostgreSQL table. The `aws_s3` extension provides the `aws_s3.table_import_from_s3` function. The return value is text.

Syntax

The required parameters are `table_name`, `column_list` and `options`. These identify the database table and specify how the data is copied into the table.

You can also use the following parameters:

- The `s3_info` parameter specifies the Amazon S3 file to import. When you use this parameter, access to Amazon S3 is provided by an IAM role for the PostgreSQL DB cluster.

```
aws_s3.table_import_from_s3 (
   table_name text,
   column_list text,
   options text,
   s3_info aws_commons._s3_uri_1
)
```

- The `credentials` parameter specifies the credentials to access Amazon S3. When you use this parameter, you don't use an IAM role.

```
aws_s3.table_import_from_s3 (
   table_name text,
   column_list text,
   options text,
   s3_info aws_commons._s3_uri_1,
   credentials aws_commons._aws_credentials_1
)
```

Parameters

table_name

A required text string containing the name of the PostgreSQL database table to import the data into.

column_list

A required text string containing an optional list of the PostgreSQL database table columns in which to copy the data. If the string is empty, all columns of the table are used. For an example, see Importing an Amazon S3 file that uses a custom delimiter.

options

A required text string containing arguments for the PostgreSQL COPY command. These arguments specify how the data is to be copied into the PostgreSQL table. For more details, see the PostgreSQL COPY documentation.

s3_info

An `aws_commons._s3_uri_1` composite type containing the following information about the S3 object:

- `bucket` – The name of the Amazon S3 bucket containing the file.
- `file_path` – The Amazon S3 file name including the path of the file.
- `region` – The Amazon Region that the file is in. For a listing of Amazon Region names and associated values, see Regions and Availability Zones.

credentials

An `aws_commons._aws_credentials_1` composite type containing the following credentials to use for the import operation:

- Access key
- Secret key
- Session token

For information about creating an `aws_commons._aws_credentials_1` composite structure, see aws_commons.create_aws_credentials.

Alternate syntax

To help with testing, you can use an expanded set of parameters instead of the `s3_info` and `credentials` parameters. Following are additional syntax variations for the `aws_s3.table_import_from_s3` function:

- Instead of using the `s3_info` parameter to identify an Amazon S3 file, use the combination of the `bucket`, `file_path`, and `region` parameters. With this form of the function, access to Amazon S3 is provided by an IAM role on the PostgreSQL DB instance.

```
aws_s3.table_import_from_s3 (
   table_name text,
   column_list text,
   options text,
   bucket text,
   file_path text,
   region text
)
```

- Instead of using the `credentials` parameter to specify Amazon S3 access, use the combination of the `access_key`, `session_key`, and `session_token` parameters.

```
aws_s3.table_import_from_s3 (
   table_name text,
   column_list text,
   options text,
   bucket text,
   file_path text,
   region text,
   access_key text,
   secret_key text,
   session_token text
)
```

Alternate parameters

bucket

A text string containing the name of the Amazon S3 bucket that contains the file.

file_path

A text string containing the Amazon S3 file name including the path of the file.

region

A text string identifying the Amazon Web Services Region location of the file. For a listing of Amazon Web Services Region names and associated values, see Regions and Availability Zones.

access_key

A text string containing the access key to use for the import operation. The default is NULL.

secret_key

A text string containing the secret key to use for the import operation. The default is NULL.

session_token

(Optional) A text string containing the session key to use for the import operation. The default is NULL.

aws_commons.create_s3_uri

Creates an `aws_commons._s3_uri_1` structure to hold Amazon S3 file information. Use the results of the `aws_commons.create_s3_uri` function in the `s3_info` parameter of the aws_s3.table_import_from_s3 function.

Syntax

```
aws_commons.create_s3_uri(
   bucket text,
   file_path text,
   region text
)
```

Parameters

bucket

A required text string containing the Amazon S3 bucket name for the file.

file_path

A required text string containing the Amazon S3 file name including the path of the file.

region

A required text string containing the Amazon Web Services Region that the file is in. For a listing of Amazon Web Services Region names and associated values, see Regions and Availability Zones.

aws_commons.create_aws_credentials

Sets an access key and secret key in an `aws_commons._aws_credentials_1` structure. Use the results of the `aws_commons.create_aws_credentials` function in the `credentials` parameter of the aws_s3.table_import_from_s3 function.

Syntax

```
aws_commons.create_aws_credentials(
   access_key text,
   secret_key text,
   session_token text
)
```

Parameters

access_key

A required text string containing the access key to use for importing an Amazon S3 file. The default is NULL.

secret_key

A required text string containing the secret key to use for importing an Amazon S3 file. The default is NULL.

session_token

An optional text string containing the session token to use for importing an Amazon S3 file. The default is NULL. If you provide an optional `session_token`, you can use temporary credentials.

Exporting data from an Aurora PostgreSQL DB cluster to Amazon S3

You can query data from an Aurora PostgreSQL DB cluster and export it directly into files stored in an Amazon S3 bucket. To do this, you first install the Aurora PostgreSQL `aws_s3` extension. This extension provides you with the functions that you use to export the results of queries to Amazon S3. Following, you can find out how to install the extension and how to export data to Amazon S3.

You can export from a provisioned or an Aurora serverless DB instance. These steps aren't supported for Aurora Serverless v1.

All currently available versions of Aurora PostgreSQL support exporting data to Amazon Simple Storage Service. For detailed version information, see Amazon Aurora PostgreSQL updates in the *Release Notes for Aurora PostgreSQL*.

If you don't have a bucket set up for your export, see the following topics the *Amazon Simple Storage Service User Guide*.

- Setting up Amazon S3
- Creating a bucket

By default, the data exported from Aurora PostgreSQL to Amazon S3 uses server-side encryption with Amazon managed key. You can alternatively use customer managed key that you have already created. If you are using bucket encryption, the Amazon S3 bucket must be encrypted with Amazon Key Management Service (Amazon KMS) key (SSE-KMS). Currently, buckets encrypted with Amazon S3 managed keys (SSE-S3) are not supported.

> **Note**
>
> You can save DB and DB cluster snapshot data to Amazon S3 using the Amazon Web Services Management Console, Amazon CLI, or Amazon RDS API. For more information, see Exporting DB cluster snapshot data to Amazon S3.

Topics

- Installing the aws_s3 extension
- Upgrading the aws_s3 extension
- Overview of exporting data to Amazon S3
- Specifying the Amazon S3 file path to export to
- Setting up access to an Amazon S3 bucket
- Exporting query data using the aws_s3.query_export_to_s3 function
- Function reference
- Troubleshooting access to Amazon S3

Installing the aws_s3 extension

Before you can use Amazon Simple Storage Service with your Aurora PostgreSQL DB cluster, you need to install the aws_s3 extension. This extension provides functions for exporting data from the writer instance of an Aurora PostgreSQL DB cluster to an Amazon S3 bucket. It also provides functions for importing data from an Amazon S3. For more information, see Importing data from Amazon S3 into an Aurora PostgreSQL DB cluster. The aws_s3 extension depends on some of the helper functions in the aws_commons extension, which is installed automatically when needed.

To install the aws_s3 extension

1. Use psql (or pgAdmin) to connect to the writer instance of your Aurora PostgreSQL DB cluster as a user that has rds_superuser privileges. If you kept the default name during the setup process, you connect as postgres.

```
psql --host=111122223333.aws-region.rds.amazonaws.com --port=5432 --
username=postgres --password
```

2. To install the extension, run the following command.

```
postgres=> CREATE EXTENSION aws_s3 CASCADE;
NOTICE: installing required extension "aws_commons"
CREATE EXTENSION
```

3. To verify that the extension is installed, you can use the psql \dx metacommand.

```
postgres=> \dx
       List of installed extensions
    Name     | Version |   Schema   |                 Description
-------------+---------+------------+---------------------------------------------
 aws_commons | 1.2     | public     | Common data types across Amazon services
 aws_s3      | 1.1     | public     | Amazon S3 extension for importing data from
 S3
 plpgsql     | 1.0     | pg_catalog | PL/pgSQL procedural language
(3 rows)
```

The functions for importing data from Amazon S3 and exporting data to Amazon S3 are now available to use.

Verify that your Aurora PostgreSQL version supports exports to Amazon S3

You can verify that your Aurora PostgreSQL version supports export to Amazon S3 by using the `describe-db-engine-versions` command. The following example checks to see if version 10.14 can export to Amazon S3.

```
aws rds describe-db-engine-versions --region us-east-1 \
--engine aurora-postgresql --engine-version 10.14 | grep s3Export
```

If the output includes the string `"s3Export"`, then the engine supports Amazon S3 exports. Otherwise, the engine doesn't support them.

Upgrading the aws_s3 extension

Upgrading your Aurora PostgreSQL DB cluster to a new version doesn't upgrade the `aws_s3` extension at the same time. To upgrade the extension after the engine upgrade completes, use the `ALTER EXTENSION ... UPDATE` command. For the general procedure, see Upgrading PostgreSQL extensions.

> **Important**
>
> When you upgrade the `aws_s3` extension from version 1.1 to version 1.2, the extension's Amazon S3 export functions are recreated. As a result, any EXECUTE permissions that you previously granted on these functions to other users or roles (for example, by using `GRANT EXECUTE ON ALL FUNCTIONS IN SCHEMA aws_s3 TO your_user;`) are revoked. After this upgrade completes, re-grant these permissions to the affected users or roles.

Overview of exporting data to Amazon S3

To export data stored in an Aurora PostgreSQL database to an Amazon S3 bucket, use the following procedure.

To export Aurora PostgreSQL data to S3

1. Identify an Amazon S3 file path to use for exporting data. For details about this process, see Specifying the Amazon S3 file path to export to.
2. Provide permission to access the Amazon S3 bucket.

To export data to an Amazon S3 file, give the Aurora PostgreSQL DB cluster permission to access the Amazon S3 bucket that the export will use for storage. Doing this includes the following steps:

1. Create an IAM policy that provides access to an Amazon S3 bucket that you want to export to.
2. Create an IAM role.
3. Attach the policy you created to the role you created.
4. Add this IAM role to your DB cluster .

For details about this process, see Setting up access to an Amazon S3 bucket.

3. Identify a database query to get the data. Export the query data by calling the `aws_s3.query_export_to_s3` function.

After you complete the preceding preparation tasks, use the aws_s3.query_export_to_s3 function to export query results to Amazon S3. For details about this process, see Exporting query data using the aws_s3.query_export_to_s3 function.

Specifying the Amazon S3 file path to export to

Specify the following information to identify the location in Amazon S3 where you want to export data to:

- Bucket name – A *bucket* is a container for Amazon S3 objects or files.

  For more information on storing data with Amazon S3, see Creating a bucket and Working with objects in the *Amazon Simple Storage Service User Guide*.
- File path – The file path identifies where the export is stored in the Amazon S3 bucket. The file path consists of the following:
  - An optional path prefix that identifies a virtual folder path.
  - A file prefix that identifies one or more files to be stored. Larger exports are stored in multiple files, each with a maximum size of approximately 6 GB. The additional file names have the same file prefix but with `_part`*XX* appended. The *XX* represents 2, then 3, and so on.

  For example, a file path with an `exports` folder and a `query-1-export` file prefix is `/exports/query-1-export`.

- Amazon Region (optional) – The Amazon Region where the Amazon S3 bucket is located. If you don't specify an Amazon Region value, then Aurora saves your files into Amazon S3 in the same Amazon Region as the exporting DB cluster.

  > **Note**
  >
  > Currently, the Amazon Region must be the same as the region of the exporting DB cluster.

  For a listing of Amazon Region names and associated values, see Regions and Availability Zones.

To hold the Amazon S3 file information about where the export is to be stored, you can use the aws_commons.create_s3_uri function to create an `aws_commons._s3_uri_1` composite structure as follows.

```
psql=> SELECT aws_commons.create_s3_uri(
   'amzn-s3-demo-bucket',
   'sample-filepath',
   'us-west-2'
) AS s3_uri_1 \gset
```

You later provide this `s3_uri_1` value as a parameter in the call to the aws_s3.query_export_to_s3 function. For examples, see Exporting query data using the aws_s3.query_export_to_s3 function.

Setting up access to an Amazon S3 bucket

To export data to Amazon S3, give your PostgreSQL DB cluster permission to access the Amazon S3 bucket that the files are to go in.

To do this, use the following procedure.

To give a PostgreSQL DB cluster access to Amazon S3 through an IAM role

1. Create an IAM policy.

   This policy provides the bucket and object permissions that allow your PostgreSQL DB cluster to access Amazon S3.

   As part of creating this policy, take the following steps:

a. Include in the policy the following required actions to allow the transfer of files from your PostgreSQL DB cluster to an Amazon S3 bucket:

   - `s3:PutObject`
   - `s3:AbortMultipartUpload`

b. Include the Amazon Resource Name (ARN) that identifies the Amazon S3 bucket and objects in the bucket. The ARN format for accessing Amazon S3 is: `arn:aws-cn:s3:::amzn-s3-demo-bucket/*`

For more information on creating an IAM policy for Aurora PostgreSQL, see Creating and using an IAM policy for IAM database access. See also Tutorial: Create and attach your first customer managed policy in the *IAM User Guide*.

The following Amazon CLI command creates an IAM policy named `rds-s3-export-policy` with these options. It grants access to a bucket named *amzn-s3-demo-bucket*.

> **Warning**
>
> We recommend that you set up your database within a private VPC that has endpoint policies configured for accessing specific buckets. For more information, see Using endpoint policies for Amazon S3 in the Amazon VPC User Guide.
> We strongly recommend that you do not create a policy with all-resource access. This access can pose a threat for data security. If you create a policy that gives `S3:PutObject` access to all resources using `"Resource":"*"`, then a user with export privileges can export data to all buckets in your account. In addition, the user can export data to *any publicly writable bucket within your Amazon Region*.

After you create the policy, note the Amazon Resource Name (ARN) of the policy. You need the ARN for a subsequent step when you attach the policy to an IAM role.

```
aws iam create-policy  --policy-name rds-s3-export-policy  --policy-document '{
     "Version": "2012-10-17",
     "Statement": [
       {
         "Sid": "s3export",
         "Action": [
```

```
          "s3:PutObject*",
          "s3:ListBucket",
          "s3:GetObject*",
          "s3:DeleteObject*",
          "s3:GetBucketLocation",
          "s3:AbortMultipartUpload"
        ],
        "Effect": "Allow",
        "Resource": [
          "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
        ]
      }
    ]
  }'
```

2. Create an IAM role.

   You do this so Aurora PostgreSQL can assume this IAM role on your behalf to access your Amazon S3 buckets. For more information, see Creating a role to delegate permissions to an IAM user in the *IAM User Guide*.

   We recommend using the `aws:SourceArn` and `aws:SourceAccount` global condition context keys in resource-based policies to limit the service's permissions to a specific resource. This is the most effective way to protect against the confused deputy problem.

   If you use both global condition context keys and the `aws:SourceArn` value contains the account ID, the `aws:SourceAccount` value and the account in the `aws:SourceArn` value must use the same account ID when used in the same policy statement.

   - Use `aws:SourceArn` if you want cross-service access for a single resource.
   - Use `aws:SourceAccount` if you want to allow any resource in that account to be associated with the cross-service use.

   In the policy, be sure to use the `aws:SourceArn` global condition context key with the full ARN of the resource. The following example shows how to do so using the Amazon CLI command to create a role named `rds-s3-export-role`.

   Example

   For Linux, macOS, or Unix:

```
aws iam create-role  \
    --role-name rds-s3-export-role  \
    --assume-role-policy-document '{
     "Version": "2012-10-17",
     "Statement": [
       {
         "Effect": "Allow",
         "Principal": {
            "Service": "rds.amazonaws.com"
          },
         "Action": "sts:AssumeRole",
         "Condition": {
             "StringEquals": {
                "aws:SourceAccount": "111122223333",
                "aws:SourceArn": "arn:aws:rds:us-
east-1:111122223333:cluster:dbname"
                }
             }
       }
     ]
   }'
```

For Windows:

```
aws iam create-role  ^
    --role-name rds-s3-export-role  ^
    --assume-role-policy-document '{
     "Version": "2012-10-17",
     "Statement": [
       {
         "Effect": "Allow",
         "Principal": {
            "Service": "rds.amazonaws.com"
          },
         "Action": "sts:AssumeRole",
         "Condition": {
             "StringEquals": {
                "aws:SourceAccount": "111122223333",
                "aws:SourceArn": "arn:aws:rds:us-
east-1:111122223333:cluster:dbname"
                }
             }
```

```
      }
    ]
}'
```

3. Attach the IAM policy that you created to the IAM role that you created.

   The following Amazon CLI command attaches the policy created earlier to the role named `rds-s3-export-role`. Replace *`your-policy-arn`* with the policy ARN that you noted in an earlier step.

   ```
   aws iam attach-role-policy  --policy-arn your-policy-arn  --role-name rds-s3-export-role
   ```

4. Add the IAM role to the DB cluster. You do so by using the Amazon Web Services Management Console or Amazon CLI, as described following.

Console

To add an IAM role for a PostgreSQL DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose the PostgreSQL DB cluster name to display its details.
3. On the **Connectivity & security** tab, in the **Manage IAM roles** section, choose the role to add under **Add IAM roles to this instance**.
4. Under **Feature**, choose **s3Export**.
5. Choose **Add role**.

Amazon CLI

To add an IAM role for a PostgreSQL DB cluster using the CLI

- Use the following command to add the role to the PostgreSQL DB cluster named `my-db-cluster`. Replace *`your-role-arn`* with the role ARN that you noted in a previous step. Use `s3Export` for the value of the `--feature-name` option.

  Example

  For Linux, macOS, or Unix:

```
aws rds add-role-to-db-cluster \
   --db-cluster-identifier my-db-cluster \
   --feature-name s3Export \
   --role-arn your-role-arn   \
   --region your-region
```

For Windows:

```
aws rds add-role-to-db-cluster ^
   --db-cluster-identifier my-db-cluster ^
   --feature-name s3Export ^
   --role-arn your-role-arn ^
   --region your-region
```

Exporting query data using the aws_s3.query_export_to_s3 function

Export your PostgreSQL data to Amazon S3 by calling the aws_s3.query_export_to_s3 function.

Topics

- Prerequisites
- Calling aws_s3.query_export_to_s3
- Exporting to a CSV file that uses a custom delimiter
- Exporting to a binary file with encoding

Prerequisites

Before you use the `aws_s3.query_export_to_s3` function, be sure to complete the following prerequisites:

- Install the required PostgreSQL extensions as described in Overview of exporting data to Amazon S3.
- Determine where to export your data to Amazon S3 as described in Specifying the Amazon S3 file path to export to.
- Make sure that the DB cluster has export access to Amazon S3 as described in Setting up access to an Amazon S3 bucket.

The examples following use a database table called `sample_table`. These examples export the data into a bucket called *amzn-s3-demo-bucket*. The example table and data are created with the following SQL statements in psql.

```
psql=> CREATE TABLE sample_table (bid bigint PRIMARY KEY, name varchar(80));
psql=> INSERT INTO sample_table (bid,name) VALUES (1, 'Monday'), (2,'Tuesday'), (3,
 'Wednesday');
```

Calling aws_s3.query_export_to_s3

The following shows the basic ways of calling the aws_s3.query_export_to_s3 function.

These examples use the variable `s3_uri_1` to identify a structure that contains the information identifying the Amazon S3 file. Use the aws_commons.create_s3_uri function to create the structure.

```
psql=> SELECT aws_commons.create_s3_uri(
   'amzn-s3-demo-bucket',
   'sample-filepath',
   'us-west-2'
) AS s3_uri_1 \gset
```

Although the parameters vary for the following two `aws_s3.query_export_to_s3` function calls, the results are the same for these examples. All rows of the `sample_table` table are exported into a bucket called *amzn-s3-demo-bucket*.

```
psql=> SELECT * FROM aws_s3.query_export_to_s3('SELECT * FROM
 sample_table', :'s3_uri_1');

psql=> SELECT * FROM aws_s3.query_export_to_s3('SELECT * FROM
 sample_table', :'s3_uri_1', options :='format text');
```

The parameters are described as follows:

- `'SELECT * FROM sample_table'` – The first parameter is a required text string containing an SQL query. The PostgreSQL engine runs this query. The results of the query are copied to the S3 bucket identified in other parameters.
- `:'s3_uri_1'` – This parameter is a structure that identifies the Amazon S3 file. This example uses a variable to identify the previously created structure. You can instead create the

structure by including the `aws_commons.create_s3_uri` function call inline within the `aws_s3.query_export_to_s3` function call as follows.

```
SELECT * from aws_s3.query_export_to_s3('select * from sample_table',
   aws_commons.create_s3_uri('amzn-s3-demo-bucket', 'sample-filepath', 'us-west-2')
);
```

- `options :='format text'` – The `options` parameter is an optional text string containing PostgreSQL COPY arguments. The copy process uses the arguments and format of the PostgreSQL COPY command.

If the file specified doesn't exist in the Amazon S3 bucket, it's created. If the file already exists, it's overwritten. The syntax for accessing the exported data in Amazon S3 is the following.

```
s3-region://bucket-name[/path-prefix]/file-prefix
```

Larger exports are stored in multiple files, each with a maximum size of approximately 6 GB. The additional file names have the same file prefix but with `_part`*XX* appended. The *XX* represents 2, then 3, and so on. For example, suppose that you specify the path where you store data files as the following.

```
s3-us-west-2://amzn-s3-demo-bucket/my-prefix
```

If the export has to create three data files, the Amazon S3 bucket contains the following data files.

```
s3-us-west-2://amzn-s3-demo-bucket/my-prefix
s3-us-west-2://amzn-s3-demo-bucket/my-prefix_part2
s3-us-west-2://amzn-s3-demo-bucket/my-prefix_part3
```

For the full reference for this function and additional ways to call it, see aws_s3.query_export_to_s3. For more about accessing files in Amazon S3, see View an object in the *Amazon Simple Storage Service User Guide*.

Exporting to a CSV file that uses a custom delimiter

The following example shows how to call the aws_s3.query_export_to_s3 function to export data to a file that uses a custom delimiter. The example uses arguments of the PostgreSQL COPY command to specify the comma-separated value (CSV) format and a colon (:) delimiter.

```
SELECT * from aws_s3.query_export_to_s3('select * from basic_test', :'s3_uri_1',
 options :='format csv, delimiter $$:$$');
```

Exporting to a binary file with encoding

The following example shows how to call the aws_s3.query_export_to_s3 function to export data to a binary file that has Windows-1253 encoding.

```
SELECT * from aws_s3.query_export_to_s3('select * from basic_test', :'s3_uri_1',
 options :='format binary, encoding WIN1253');
```

Function reference

Functions

- aws_s3.query_export_to_s3
- aws_commons.create_s3_uri

aws_s3.query_export_to_s3

Exports a PostgreSQL query result to an Amazon S3 bucket. The `aws_s3` extension provides the `aws_s3.query_export_to_s3` function.

The two required parameters are `query` and `s3_info`. These define the query to be exported and identify the Amazon S3 bucket to export to. An optional parameter called `options` provides for defining various export parameters. For examples of using the `aws_s3.query_export_to_s3` function, see Exporting query data using the aws_s3.query_export_to_s3 function.

Syntax

```
aws_s3.query_export_to_s3(
    query text,
    s3_info aws_commons._s3_uri_1,
    options text,
    kms_key text
)
```

Input parameters

query

A required text string containing an SQL query that the PostgreSQL engine runs. The results of this query are copied to an S3 bucket identified in the `s3_info` parameter.

s3_info

An `aws_commons._s3_uri_1` composite type containing the following information about the S3 object:

- `bucket` – The name of the Amazon S3 bucket to contain the file.
- `file_path` – The Amazon S3 file name and path.
- `region` – The Amazon Region that the bucket is in. For a listing of Amazon Region names and associated values, see Regions and Availability Zones.

  Currently, this value must be the same Amazon Region as that of the exporting DB cluster . The default is the Amazon Region of the exporting DB cluster .

To create an `aws_commons._s3_uri_1` composite structure, see the aws_commons.create_s3_uri function.

options

An optional text string containing arguments for the PostgreSQL `COPY` command. These arguments specify how the data is to be copied when exported. For more details, see the PostgreSQL COPY documentation.

kms_key text

An optional text string containing the customer managed KMS key of the S3 bucket to export the data to.

Alternate input parameters

To help with testing, you can use an expanded set of parameters instead of the `s3_info` parameter. Following are additional syntax variations for the `aws_s3.query_export_to_s3` function.

Instead of using the `s3_info` parameter to identify an Amazon S3 file, use the combination of the `bucket`, `file_path`, and `region` parameters.

```
aws_s3.query_export_to_s3(
    query text,
    bucket text,
    file_path text,
    region text,
    options text,
    kms_key text
)
```

query

A required text string containing an SQL query that the PostgreSQL engine runs. The results of this query are copied to an S3 bucket identified in the `s3_info` parameter.

bucket

A required text string containing the name of the Amazon S3 bucket that contains the file.

file_path

A required text string containing the Amazon S3 file name including the path of the file.

region

An optional text string containing the Amazon Region that the bucket is in. For a listing of Amazon Region names and associated values, see Regions and Availability Zones.

Currently, this value must be the same Amazon Region as that of the exporting DB cluster . The default is the Amazon Region of the exporting DB cluster .

options

An optional text string containing arguments for the PostgreSQL `COPY` command. These arguments specify how the data is to be copied when exported. For more details, see the PostgreSQL COPY documentation.

kms_key text

An optional text string containing the customer managed KMS key of the S3 bucket to export the data to.

Output parameters

```
aws_s3.query_export_to_s3(
```

```
    OUT rows_uploaded bigint,
    OUT files_uploaded bigint,
    OUT bytes_uploaded bigint
)
```

rows_uploaded

The number of table rows that were successfully uploaded to Amazon S3 for the given query.

files_uploaded

The number of files uploaded to Amazon S3. Files are created in sizes of approximately 6 GB. Each additional file created has `_part`*XX* appended to the name. The *XX* represents 2, then 3, and so on as needed.

bytes_uploaded

The total number of bytes uploaded to Amazon S3.

Examples

```
psql=> SELECT * from aws_s3.query_export_to_s3('select * from sample_table', 'amzn-s3-demo-bucket', 'sample-filepath');
psql=> SELECT * from aws_s3.query_export_to_s3('select * from sample_table', 'amzn-s3-demo-bucket', 'sample-filepath','us-west-2');
psql=> SELECT * from aws_s3.query_export_to_s3('select * from sample_table', 'amzn-s3-demo-bucket', 'sample-filepath','us-west-2','format text');
```

aws_commons.create_s3_uri

Creates an `aws_commons._s3_uri_1` structure to hold Amazon S3 file information. You use the results of the `aws_commons.create_s3_uri` function in the `s3_info` parameter of the aws_s3.query_export_to_s3 function. For an example of using the `aws_commons.create_s3_uri` function, see Specifying the Amazon S3 file path to export to.

Syntax

```
aws_commons.create_s3_uri(
   bucket text,
   file_path text,
   region text
```

```
)
```

Input parameters

bucket

A required text string containing the Amazon S3 bucket name for the file.

file_path

A required text string containing the Amazon S3 file name including the path of the file.

region

A required text string containing the Amazon Region that the file is in. For a listing of Amazon Region names and associated values, see Regions and Availability Zones.

Troubleshooting access to Amazon S3

If you encounter connection problems when attempting to export data to Amazon S3, first confirm that the outbound access rules for the VPC security group associated with your DB instance permit network connectivity. Specifically, the security group must have a rule that allows the DB instance to send TCP traffic to port 443 and to any IPv4 addresses (0.0.0.0/0). For more information, see Provide access to the DB cluster in the VPC by creating a security group.

See also the following for recommendations:

- Troubleshooting Amazon Aurora identity and access
- Troubleshooting Amazon S3 in the *Amazon Simple Storage Service User Guide*
- Troubleshooting Amazon S3 and IAM in the *IAM User Guide*

Invoking an Amazon Lambda function from an Aurora PostgreSQL DB cluster

Amazon Lambda is an event-driven compute service that lets you run code without provisioning or managing servers. It's available for use with many Amazon services, including Aurora PostgreSQL. For example, you can use Lambda functions to process event notifications from a database, or to load data from files whenever a new file is uploaded to Amazon S3. To learn more about Lambda, see What is Amazon Lambda? in the *Amazon Lambda Developer Guide.*

> **Note**
>
> Invoking Amazon Lambda functions is supported in Aurora PostgreSQL 11.9 and higher (including Aurora serverless).

Setting up Aurora PostgreSQL to work with Lambda functions is a multi-step process involving Amazon Lambda, IAM, your VPC, and your Aurora PostgreSQL DB cluster. Following, you can find summaries of the necessary steps.

For more information about Lambda functions, see Getting started with Lambda and Amazon Lambda foundations in the *Amazon Lambda Developer Guide*.

Topics

- Step 1: Configure your Aurora PostgreSQL DB cluster for outbound connections to Amazon Lambda
- Step 2: Configure IAM for your Aurora PostgreSQL DB cluster and Amazon Lambda
- Step 3: Install the aws_lambda extension for an Aurora PostgreSQL DB cluster
- Step 4: Use Lambda helper functions with your Aurora PostgreSQL DB cluster (Optional)
- Step 5: Invoke a Lambda function from your Aurora PostgreSQL DB cluster
- Step 6: Grant other users permission to invoke Lambda functions
- Examples: Invoking Lambda functions from your Aurora PostgreSQL DB cluster
- Lambda function error messages
- Amazon Lambda function and parameter reference

Step 1: Configure your Aurora PostgreSQL DB cluster for outbound connections to Amazon Lambda

Lambda functions always run inside an Amazon VPC that's owned by the Amazon Lambda service. Lambda applies network access and security rules to this VPC and it maintains and monitors the VPC automatically. Your Aurora PostgreSQL DB cluster sends network traffic to the Lambda service's VPC. How you configure this depends on whether your Aurora DB cluster's primary DB instance is public or private.

- **Public Aurora PostgreSQL DB cluster** – A DB cluster's primary DB instance is public if it's located in a public subnet on your VPC, and if the instance's "PubliclyAccessible" property is `true`. To find

the value of this property, you can use the describe-db-instances Amazon CLI command. Or, you can use the Amazon Web Services Management Console to open the **Connectivity & security** tab and check that **Publicly accessible** is **Yes**. To verify that the instance is in the public subnet of your VPC, you can use the Amazon Web Services Management Console or the Amazon CLI.

To set up access to Lambda, you use the Amazon Web Services Management Console or the Amazon CLI to create an outbound rule on your VPC's security group. The outbound rule specifies that TCP can use port 443 to send packets to any IPv4 addresses (0.0.0.0/0).

- **Private Aurora PostgreSQL DB cluster** – In this case, the instance's "PubliclyAccessible" property is `false` or it's in a private subnet. To allow the instance to work with Lambda, you can use a Network Address Translation) NAT gateway. For more information, see NAT gateways. Or, you can configure your VPC with a VPC endpoint for Lambda. For more information, see VPC endpoints in the *Amazon VPC User Guide*. The endpoint responds to calls made by your Aurora PostgreSQL DB cluster to your Lambda functions.

Your VPC can now interact with the Amazon Lambda VPC at the network level. Next, you configure the permissions using IAM.

> ⚠ **DNS resolution conflicts with Kerberos authentication and Lambda VPC endpoints**
>
> Lambda invocations from your DB cluster may fail if you enable Kerberos authentication and configure Lambda VPC endpoints in your Amazon Managed Microsoft AD VPC. When you enable Kerberos authentication, your DB cluster prioritizes Amazon Managed Microsoft AD DNS servers over the VPC DNS resolver. If Lambda endpoint records exist in your Amazon Managed Microsoft AD DNS, the endpoints may resolve to IP addresses in your Active Directory VPC rather than your database VPC. This configuration prevents successful Lambda invocations.
> For more information, see Using Kerberos authentication with Aurora PostgreSQL.

Step 2: Configure IAM for your Aurora PostgreSQL DB cluster and Amazon Lambda

Invoking Lambda functions from your Aurora PostgreSQL DB cluster requires certain privileges. To configure the necessary privileges, we recommend that you create an IAM policy that allows invoking Lambda functions, assign that policy to a role, and then apply the role to your DB cluster.

This approach gives the DB cluster privileges to invoke the specified Lambda function on your behalf. The following steps show you how to do this using the Amazon CLI.

To configure IAM permissions for using your cluster with Lambda

1. Use the create-policy Amazon CLI command to create an IAM policy that allows your Aurora PostgreSQL DB cluster to invoke the specified Lambda function. (The statement ID (Sid) is an optional description for your policy statement and has no effect on usage.) This policy gives your Aurora DB cluster the minimum permissions needed to invoke the specified Lambda function.

```
aws iam create-policy  --policy-name rds-lambda-policy --policy-document '{
    "Version": "2012-10-17",
    "Statement": [
        {
        "Sid": "AllowAccessToExampleFunction",
        "Effect": "Allow",
        "Action": "lambda:InvokeFunction",
        "Resource": "arn:aws:lambda:aws-region:444455556666:function:my-function"
        }
    ]
}'
```

   Alternatively, you can use the predefined `AWSLambdaRole` policy that allows you to invoke any of your Lambda functions. For more information, see Identity-based IAM policies for Lambda

2. Use the create-role Amazon CLI command to create an IAM role that the policy can assume at runtime.

```
aws iam create-role  --role-name rds-lambda-role --assume-role-policy-document '{
    "Version": "2012-10-17",
    "Statement": [
        {
        "Effect": "Allow",
        "Principal": {
            "Service": "rds.amazonaws.com"
        },
        "Action": "sts:AssumeRole"
        }
    ]
}'
```

3. Apply the policy to the role by using the attach-role-policy Amazon CLI command.

```
aws iam attach-role-policy \
    --policy-arn arn:aws:iam::444455556666:policy/rds-lambda-policy \
    --role-name rds-lambda-role --region aws-region
```

4. Apply the role to your Aurora PostgreSQL DB cluster by using the add-role-to-db-cluster Amazon CLI command. This last step allows your DB cluster's database users to invoke Lambda functions.

```
aws rds add-role-to-db-cluster \
       --db-cluster-identifier my-cluster-name \
       --feature-name Lambda \
       --role-arn  arn:aws:iam::444455556666:role/rds-lambda-role   \
       --region aws-region
```

With the VPC and the IAM configurations complete, you can now install the `aws_lambda` extension. (Note that you can install the extension at any time, but until you set up the correct VPC support and IAM privileges, the `aws_lambda` extension adds nothing to your Aurora PostgreSQL DB cluster's capabilities.)

Step 3: Install the `aws_lambda` extension for an Aurora PostgreSQL DB cluster

To use Amazon Lambda with your Aurora PostgreSQL DB cluster, add the `aws_lambda` PostgreSQL extension to your Aurora PostgreSQL DB cluster. This extension provides your Aurora PostgreSQL DB cluster with the ability to call Lambda functions from PostgreSQL.

To install the `aws_lambda` extension in your Aurora PostgreSQL DB cluster

Use the PostgreSQL `psql` command-line or the pgAdmin tool to connect to your Aurora PostgreSQL DB cluster .

1. Connect to your Aurora PostgreSQL DB cluster instance as a user with `rds_superuser` privileges. The default `postgres` user is shown in the example.

```
psql -h cluster-instance.444455556666.aws-region.rds.amazonaws.com -U postgres -p
 5432
```

2. Install the `aws_lambda` extension. The `aws_commons` extension is also required. It provides helper functions to `aws_lambda` and many other Aurora extensions for PostgreSQL. If it's

not already on your Aurora PostgreSQLDB cluster , it's installed with `aws_lambda` as shown following.

```
CREATE EXTENSION IF NOT EXISTS aws_lambda CASCADE;
NOTICE:  installing required extension "aws_commons"
CREATE EXTENSION
```

The `aws_lambda` extension is installed in your Aurora PostgreSQL DB cluster's primary DB instance. You can now create convenience structures for invoking your Lambda functions.

Step 4: Use Lambda helper functions with your Aurora PostgreSQL DB cluster (Optional)

You can use the helper functions in the `aws_commons` extension to prepare entities that you can more easily invoke from PostgreSQL. To do this, you need to have the following information about your Lambda functions:

- **Function name** – The name, Amazon Resource Name (ARN), version, or alias of the Lambda function. The IAM policy created in Step 2: Configure IAM for your cluster and Lambda requires the ARN, so we recommend that you use your function's ARN.
- **Amazon Region** – (Optional) The Amazon Region where the Lambda function is located if it's not in the same Region as your Aurora PostgreSQL DB cluster.

To hold the Lambda function name information, you use the aws_commons.create_lambda_function_arn function. This helper function creates an `aws_commons._lambda_function_arn_1` composite structure with the details needed by the invoke function. Following, you can find three alternative approaches to setting up this composite structure.

```
SELECT aws_commons.create_lambda_function_arn(
   'my-function',
   'aws-region'
) AS aws_lambda_arn_1 \gset
```

```
SELECT aws_commons.create_lambda_function_arn(
   '111122223333:function:my-function',
   'aws-region'
```

```
) AS lambda_partial_arn_1 \gset
```

```
SELECT aws_commons.create_lambda_function_arn(
   'arn:aws-cn:lambda:aws-region:111122223333:function:my-function'
) AS lambda_arn_1 \gset
```


Any of these values can be used in calls to the aws_lambda.invoke function. For examples, see Step 5: Invoke a Lambda function from your Aurora PostgreSQL DB cluster.

Step 5: Invoke a Lambda function from your Aurora PostgreSQL DB cluster

The `aws_lambda.invoke` function behaves synchronously or asynchronously, depending on the `invocation_type`. The two alternatives for this parameter are `RequestResponse` (the default) and `Event`, as follows.

- **`RequestResponse`** – This invocation type is *synchronous*. It's the default behavior when the call is made without specifying an invocation type. The response payload includes the results of the `aws_lambda.invoke` function. Use this invocation type when your workflow requires receiving results from the Lambda function before proceeding.
- **`Event`** – This invocation type is *asynchronous*. The response doesn't include a payload containing results. Use this invocation type when your workflow doesn't need a result from the Lambda function to continue processing.

As a simple test of your setup, you can connect to your DB instance using `psql` and invoke an example function from the command line. Suppose that you have one of the basic functions set up on your Lambda service, such as the simple Python function shown in the following screenshot.

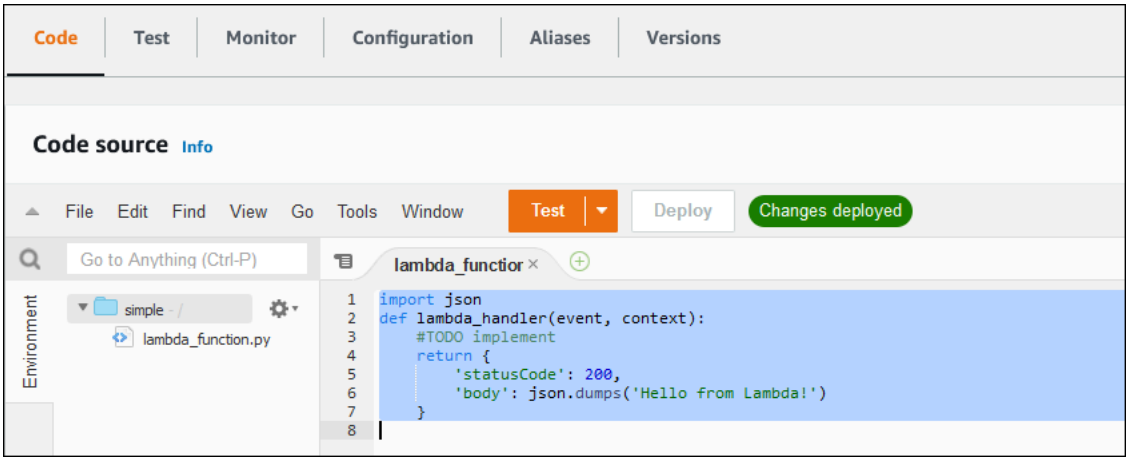

To invoke an example function

1. Connect to your primary DB instance using `psql` or pgAdmin.

```
psql -h cluster.444455556666.aws-region.rds.amazonaws.com -U postgres -p 5432
```

2. Invoke the function using its ARN.

```
SELECT * from
 aws_lambda.invoke(aws_commons.create_lambda_function_arn('arn:aws:lambda:aws-
region:444455556666:function:simple', 'us-west-1'), '{"body": "Hello from
 Postgres!"}'::json );
```

   The response looks as follows.

```
status_code |                         payload                         |
 executed_version | log_result
-------------+---------------------------------------------------------
+------------------+------------
         200 | {"statusCode": 200, "body": "\"Hello from Lambda!\""} | $LATEST
     |
(1 row)
```

If your invocation attempt doesn't succeed, see Lambda function error messages.

Step 6: Grant other users permission to invoke Lambda functions

At this point in the procedures, only you as `rds_superuser` can invoke your Lambda functions. To allow other users to invoke any functions that you create, you need to grant them permission.

To grant others permission to invoke Lambda functions

1. Connect to your primary DB instance using `psql` or pgAdmin.

```
psql -h cluster.444455556666.aws-region.rds.amazonaws.com -U postgres -p 5432
```

2. Run the following SQL commands:

```
postgres=>  GRANT USAGE ON SCHEMA aws_lambda TO db_username;
GRANT EXECUTE ON ALL FUNCTIONS IN SCHEMA aws_lambda TO db_username;
```

Examples: Invoking Lambda functions from your Aurora PostgreSQL DB cluster

Following, you can find several examples of calling the aws_lambda.invoke function. Most of the examples use the composite structure `aws_lambda_arn_1` that you create in Step 4: Use Lambda helper functions with your Aurora PostgreSQL DB cluster (Optional) to simplify passing the function details. For an example of asynchronous invocation, see Example: Asynchronous (Event) invocation of Lambda functions. All the other examples listed use synchronous invocation.

To learn more about Lambda invocation types, see Invoking Lambda functions in the *Amazon Lambda Developer Guide*. For more information about `aws_lambda_arn_1`, see aws_commons.create_lambda_function_arn.

Examples list

- Example: Synchronous (RequestResponse) invocation of Lambda functions
- Example: Asynchronous (Event) invocation of Lambda functions
- Example: Capturing the Lambda execution log in a function response
- Example: Including client context in a Lambda function
- Example: Invoking a specific version of a Lambda function

Example: Synchronous (RequestResponse) invocation of Lambda functions

Following are two examples of a synchronous Lambda function invocation. The results of these `aws_lambda.invoke` function calls are the same.

```
SELECT * FROM aws_lambda.invoke('aws_lambda_arn_1', '{"body": "Hello from
 Postgres!"}'::json);
```

```
SELECT * FROM aws_lambda.invoke('aws_lambda_arn_1', '{"body": "Hello from
 Postgres!"}'::json, 'RequestResponse');
```

The parameters are described as follows:

- `:'aws_lambda_arn_1'` – This parameter identifies the composite structure created in Step 4: Use Lambda helper functions with your Aurora PostgreSQL DB cluster (Optional), with the `aws_commons.create_lambda_function_arn` helper function. You can also create this structure inline within your `aws_lambda.invoke` call as follows.

```
SELECT * FROM aws_lambda.invoke(aws_commons.create_lambda_function_arn('my-function',
 'aws-region'),
'{"body": "Hello from Postgres!"}'::json
);
```

- `'{"body": "Hello from PostgreSQL!"}'::json` – The JSON payload to pass to the Lambda function.
- `'RequestResponse'` – The Lambda invocation type.

Example: Asynchronous (Event) invocation of Lambda functions

Following is an example of an asynchronous Lambda function invocation. The `Event` invocation type schedules the Lambda function invocation with the specified input payload and returns immediately. Use the `Event` invocation type in certain workflows that don't depend on the results of the Lambda function.

```
SELECT * FROM aws_lambda.invoke('aws_lambda_arn_1', '{"body": "Hello from
 Postgres!"}'::json, 'Event');
```

Example: Capturing the Lambda execution log in a function response

You can include the last 4 KB of the execution log in the function response by using the `log_type` parameter in your `aws_lambda.invoke` function call. By default, this parameter is set to None, but you can specify `Tail` to capture the results of the Lambda execution log in the response, as shown following.

```
SELECT *, select convert_from(decode(log_result, 'base64'), 'utf-8') as log FROM
 aws_lambda.invoke(:'aws_lambda_arn_1', '{"body": "Hello from Postgres!"}'::json,
 'RequestResponse', 'Tail');
```

Set the aws_lambda.invoke function's `log_type` parameter to `Tail` to include the execution log in the response. The default value for the `log_type` parameter is None.

The `log_result` that's returned is a `base64` encoded string. You can decode the contents using a combination of the `decode` and `convert_from` PostgreSQL functions.

For more information about `log_type`, see aws_lambda.invoke.

Example: Including client context in a Lambda function

The `aws_lambda.invoke` function has a `context` parameter that you can use to pass information separate from the payload, as shown following.

```
SELECT *, convert_from(decode(log_result, 'base64'), 'utf-8') as log FROM
 aws_lambda.invoke(:'aws_lambda_arn_1', '{"body": "Hello from Postgres!"}'::json,
 'RequestResponse', 'Tail');
```

To include client context, use a JSON object for the aws_lambda.invoke function's `context` parameter.

For more information about the `context` parameter, see the aws_lambda.invoke reference.

Example: Invoking a specific version of a Lambda function

You can specify a particular version of a Lambda function by including the `qualifier` parameter with the `aws_lambda.invoke` call. Following, you can find an example that does this using '*custom_version*' as an alias for the version.

```
SELECT * FROM aws_lambda.invoke('aws_lambda_arn_1', '{"body": "Hello from
 Postgres!"}'::json, 'RequestResponse', 'None', NULL, 'custom_version');
```

You can also supply a Lambda function qualifier with the function name details instead, as follows.

```
SELECT * FROM aws_lambda.invoke(aws_commons.create_lambda_function_arn('my-
function:custom_version', 'us-west-2'),
'{"body": "Hello from Postgres!"}'::json);
```

For more information about `qualifier` and other parameters, see the aws_lambda.invoke reference.

Lambda function error messages

In the following list you can find information about error messages, with possible causes and solutions.

- **VPC configuration issues**

  VPC configuration issues can raise the following error messages when trying to connect:

```
ERROR:  invoke API failed
DETAIL: Amazon Lambda client returned 'Unable to connect to endpoint'.
CONTEXT:  SQL function "invoke" statement 1
```

A common cause for this error is improperly configured VPC security group. Make sure you have an outbound rule for TCP open on port 443 of your VPC security group so that your VPC can connect to the Lambda VPC.

- **Lack of permissions needed to invoke Lambda functions**

  If you see either of the following error messages, the user (role) invoking the function doesn't have proper permissions.

  ```
  ERROR:  permission denied for schema aws_lambda
  ```

  ```
  ERROR:  permission denied for function invoke
  ```

  A user (role) must be given specific grants to invoke Lambda functions. For more information, see Step 6: Grant other users permission to invoke Lambda functions.

- **Improper handling of errors in your Lambda functions**

  If a Lambda function throws an exception during request processing, `aws_lambda.invoke` fails with a PostgreSQL error such as the following.

  ```
  SELECT * FROM aws_lambda.invoke('aws_lambda_arn_1', '{"body": "Hello from
   Postgres!"}'::json);
  ERROR:  lambda invocation failed
  DETAIL:  "arn:aws-cn:lambda:us-west-2:555555555555:function:my-function" returned
   error "Unhandled", details: "<Error details string>".
  ```

  Be sure to handle errors in your Lambda functions or in your PostgreSQL application.

Amazon Lambda function and parameter reference

Following is the reference for the functions and parameters to use for invoking Lambda with Aurora PostgreSQL .

Functions and parameters

- aws_lambda.invoke
- aws_commons.create_lambda_function_arn
- aws_lambda parameters

aws_lambda.invoke

Runs a Lambda function for an Aurora PostgreSQL DB cluster .

For more details about invoking Lambda functions, see also Invoke in the *Amazon Lambda Developer Guide.*

Syntax

JSON

```
aws_lambda.invoke(
IN function_name TEXT,
IN payload JSON,
IN region TEXT DEFAULT NULL,
IN invocation_type TEXT DEFAULT 'RequestResponse',
IN log_type TEXT DEFAULT 'None',
IN context JSON DEFAULT NULL,
IN qualifier VARCHAR(128) DEFAULT NULL,
OUT status_code INT,
OUT payload JSON,
OUT executed_version TEXT,
OUT log_result TEXT)
```

```
aws_lambda.invoke(
IN function_name aws_commons._lambda_function_arn_1,
IN payload JSON,
IN invocation_type TEXT DEFAULT 'RequestResponse',
IN log_type TEXT DEFAULT 'None',
IN context JSON DEFAULT NULL,
IN qualifier VARCHAR(128) DEFAULT NULL,
OUT status_code INT,
OUT payload JSON,
OUT executed_version TEXT,
OUT log_result TEXT)
```

JSONB

```
aws_lambda.invoke(
IN function_name TEXT,
IN payload JSONB,
IN region TEXT DEFAULT NULL,
IN invocation_type TEXT DEFAULT 'RequestResponse',
IN log_type TEXT DEFAULT 'None',
IN context JSONB DEFAULT NULL,
IN qualifier VARCHAR(128) DEFAULT NULL,
OUT status_code INT,
OUT payload JSONB,
OUT executed_version TEXT,
OUT log_result TEXT)
```

```
aws_lambda.invoke(
IN function_name aws_commons._lambda_function_arn_1,
IN payload JSONB,
IN invocation_type TEXT DEFAULT 'RequestResponse',
IN log_type TEXT DEFAULT 'None',
IN context JSONB DEFAULT NULL,
IN qualifier VARCHAR(128) DEFAULT NULL,
OUT status_code INT,
OUT payload JSONB,
OUT executed_version TEXT,
OUT log_result TEXT
)
```

Input parameters

function_name

The identifying name of the Lambda function. The value can be the function name, an ARN, or a partial ARN. For a listing of possible formats, see Lambda function name formats in the *Amazon Lambda Developer Guide.*

payload

The input for the Lambda function. The format can be JSON or JSONB. For more information, see JSON Types in the PostgreSQL documentation.

region

(Optional) The Lambda Region for the function. By default, Aurora resolves the Amazon Region from the full ARN in the `function_name` or it uses the Aurora PostgreSQL DB instance Region. If this Region value conflicts with the one provided in the `function_name` ARN, an error is raised.

invocation_type

The invocation type of the Lambda function. The value is case-sensitive. Possible values include the following:

- `RequestResponse` – The default. This type of invocation for a Lambda function is synchronous and returns a response payload in the result. Use the `RequestResponse` invocation type when your workflow depends on receiving the Lambda function result immediately.
- `Event` – This type of invocation for a Lambda function is asynchronous and returns immediately without a returned payload. Use the `Event` invocation type when you don't need results of the Lambda function before your workflow moves on.
- `DryRun` – This type of invocation tests access without running the Lambda function.

log_type

The type of Lambda log to return in the `log_result` output parameter. The value is case-sensitive. Possible values include the following:

- Tail – The returned `log_result` output parameter will include the last 4 KB of the execution log.
- None – No Lambda log information is returned.

context

Client context in JSON or JSONB format. Fields to use include than `custom` and `env`.

qualifier

A qualifier that identifies a Lambda function's version to be invoked. If this value conflicts with one provided in the `function_name` ARN, an error is raised.

Output parameters

status_code

An HTTP status response code. For more information, see Lambda Invoke response elements in the *Amazon Lambda Developer Guide.*

payload

The information returned from the Lambda function that ran. The format is in JSON or JSONB.

executed_version

The version of the Lambda function that ran.

log_result

The execution log information returned if the `log_type` value is `Tail` when the Lambda function was invoked. The result contains the last 4 KB of the execution log encoded in Base64.

aws_commons.create_lambda_function_arn

Creates an `aws_commons._lambda_function_arn_1` structure to hold Lambda function name information. You can use the results of the `aws_commons.create_lambda_function_arn` function in the `function_name` parameter of the aws_lambda.invoke aws_lambda.invoke function.

Syntax

```
aws_commons.create_lambda_function_arn(
    function_name TEXT,
    region TEXT DEFAULT NULL
    )
    RETURNS aws_commons._lambda_function_arn_1
```

Input parameters

function_name

A required text string containing the Lambda function name. The value can be a function name, a partial ARN, or a full ARN.

region

An optional text string containing the Amazon Region that the Lambda function is in. For a listing of Region names and associated values, see Regions and Availability Zones.

aws_lambda parameters

In this table, you can find parameters associated with the `aws_lambda` function.

Parameter	Description
`aws_lambda.connect_timeout_ms`	This is a dynamic parameter and it sets the maximum wait time while connecting to Amazon Lambda. The default values is `1000`. Allowed values for this parameter are 1 - 900000.
`aws_lambda.request_timeout_ms`	This is a dynamic parameter and it sets the maximum wait time while waiting for response from Amazon Lambda. The default values is `3000`. Allowed values for this parameter are 1 - 900000.
`aws_lambda.endpoint_override`	Specifies the endpoint that can be used to connect to Amazon Lambda. An empty string selects the default Amazon Lambda endpoint for the region. You must restart the database for this static parameter change to take effect.

Publishing Aurora PostgreSQL logs to Amazon CloudWatch Logs

You can configure your Aurora PostgreSQL DB cluster to export log data to Amazon CloudWatch Logs on a regular basis. When you do so, events from your Aurora PostgreSQL DB cluster's PostgreSQL log are automatically *published* to Amazon CloudWatch, as Amazon CloudWatch Logs. In CloudWatch, you can find the exported log data in a *Log group* for your Aurora PostgreSQL DB cluster. The log group contains one or more *log streams* that contain the events from the PostgreSQL log from each instance in the cluster.

Publishing the logs to CloudWatch Logs allows you to keep your cluster's PostgreSQL log records in highly durable storage. With the log data available in CloudWatch Logs, you can evaluate and improve your cluster's operations. You can also use CloudWatch to create alarms and view metrics. To learn more, see Monitoring log events in Amazon CloudWatch.

> **Note**
>
> Publishing your PostgreSQL logs to CloudWatch Logs consumes storage, and you incur charges for that storage. Be sure to delete any CloudWatch Logs that you no longer need.

Turning the export log option off for an existing Aurora PostgreSQL DB cluster doesn't affect any data that's already held in CloudWatch Logs. Existing logs remain available in CloudWatch Logs based on your log retention settings. To learn more about CloudWatch Logs, see What is Amazon CloudWatch Logs?

Aurora PostgreSQL supports publishing logs to CloudWatch Logs for the following versions.

- 16.1 and all higher versions
- 15.2 and higher 15 versions
- 14.3 and higher 14 versions
- 13.3 and higher 13 versions
- 12.8 and higher 12 versions
- 11.9 and higher 11 versions

For information about turning on the option to publish logs to CloudWatch Logs, monitoring log events in CloudWatch Logs, and analyzing logs using CloudWatch Logs Insights, see the following topics.

Topics

- Turning on the option to publish logs to Amazon CloudWatch
- Monitoring log events in Amazon CloudWatch
- Analyzing PostgreSQL logs using CloudWatch Logs Insights

Turning on the option to publish logs to Amazon CloudWatch

To publish your Aurora PostgreSQL DB cluster's PostgreSQL log to CloudWatch Logs, choose the **Log export** option for the cluster. You can choose the Log export setting when you create your Aurora PostgreSQL DB cluster. Or, you can modify the cluster later on. When you modify an existing cluster, its PostgreSQL logs from each instance are published to CloudWatch cluster from

that point on. For Aurora PostgreSQL, the PostgreSQL log (`postgresql.log`) is the only log that gets published to Amazon CloudWatch.

You can use the Amazon Web Services Management Console, the Amazon CLI, or the RDS API to turn on the Log export feature for your Aurora PostgreSQL DB cluster.

Console

You choose the Log exports option to start publishing the PostgreSQL logs from your Aurora PostgreSQL DB cluster to CloudWatch Logs.

To turn on the Log export feature from the console

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the Aurora PostgreSQL DB cluster whose log data you want to publish to CloudWatch Logs.
4. Choose **Modify**.
5. In the **Log exports** section, choose **PostgreSQL log**.
6. Choose **Continue**, and then choose **Modify cluster** on the summary page.

Amazon CLI

You can turn on the log export option to start publishing Aurora PostgreSQL logs to Amazon CloudWatch Logs with the Amazon CLI. To do so, run the modify-db-cluster Amazon CLI command with the following options:

- `--db-cluster-identifier`—The DB cluster identifier.
- `--cloudwatch-logs-export-configuration`—The configuration setting for the log types to be set for export to CloudWatch Logs for the DB cluster.

You can also publish Aurora PostgreSQL logs by running one of the following Amazon CLI commands:

- create-db-cluster
- restore-db-cluster-from-s3
- restore-db-cluster-from-snapshot

- restore-db-cluster-to-point-in-time

Run one of these Amazon CLI commands with the following options:

- `--db-cluster-identifier`—The DB cluster identifier.
- `--engine`—The database engine.
- `--enable-cloudwatch-logs-exports`—The configuration setting for the log types to be enabled for export to CloudWatch Logs for the DB cluster.

Other options might be required depending on the Amazon CLI command that you run.

Example

The following command creates an Aurora PostgreSQL DB cluster to publish log files to CloudWatch Logs.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
    --db-cluster-identifier my-db-cluster \
    --engine aurora-postgresql \
    --enable-cloudwatch-logs-exports postgresql
```

For Windows:

```
aws rds create-db-cluster ^
    --db-cluster-identifier my-db-cluster ^
    --engine aurora-postgresql ^
    --enable-cloudwatch-logs-exports postgresql
```

Example

The following command modifies an existing Aurora PostgreSQL DB cluster to publish log files to CloudWatch Logs. The `--cloudwatch-logs-export-configuration` value is a JSON object. The key for this object is `EnableLogTypes`, and its value is `postgresql`, and `instance`.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier my-db-cluster \
```

```
    --cloudwatch-logs-export-configuration '{"EnableLogTypes":
["postgresql","instance"]}'
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier my-db-cluster ^
    --cloudwatch-logs-export-configuration '{\"EnableLogTypes\":[\"postgresql\",
\"instance\"]}'
```

> **Note**
>
> When using the Windows command prompt, make sure to escape double quotation marks (") in JSON code by prefixing them with a backslash (\).

Example

The following example modifies an existing Aurora PostgreSQL DB cluster to disable publishing log files to CloudWatch Logs. The `--cloudwatch-logs-export-configuration` value is a JSON object. The key for this object is `DisableLogTypes`, and its value is `postgresql` and `instance`.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbinstance \
    --cloudwatch-logs-export-configuration '{"DisableLogTypes":
["postgresql","instance"]}'
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbinstance ^
    --cloudwatch-logs-export-configuration "{\"DisableLogTypes\":[\"postgresql\",
\"instance\"]}"
```

> **Note**
>
> When using the Windows command prompt, you must escape double quotes (") in JSON code by prefixing them with a backslash (\).

RDS API

You can turn on the log export option to start publishing Aurora PostgreSQL logs with the RDS API. To do so, run the ModifyDBCluster operation with the following options:

- `DBClusterIdentifier` – The DB cluster identifier.
- `CloudwatchLogsExportConfiguration` – The configuration setting for the log types to be enabled for export to CloudWatch Logs for the DB cluster.

You can also publish Aurora PostgreSQL logs with the RDS API by running one of the following RDS API operations:

- CreateDBCluster
- RestoreDBClusterFromS3
- RestoreDBClusterFromSnapshot
- RestoreDBClusterToPointInTime

Run the RDS API action with the following parameters:

- `DBClusterIdentifier`—The DB cluster identifier.
- `Engine`—The database engine.
- `EnableCloudwatchLogsExports`—The configuration setting for the log types to be enabled for export to CloudWatch Logs for the DB cluster.

Other parameters might be required depending on the Amazon CLI command that you run.

Monitoring log events in Amazon CloudWatch

With Aurora PostgreSQL log events published and available as Amazon CloudWatch Logs, you can view and monitor events using Amazon CloudWatch. For more information about monitoring, see View log data sent to CloudWatch Logs.

When you turn on Log exports, a new log group is automatically created using the prefix `/aws/rds/cluster/` with the name of your Aurora PostgreSQL and the log type, as in the following pattern.

```
/aws/rds/cluster/your-cluster-name/postgresql
```

As an example, suppose that an Aurora PostgreSQL DB cluster named `docs-lab-apg-small` exports its log to Amazon CloudWatch Logs. Its log group name in Amazon CloudWatch is shown following.

```
/aws/rds/cluster/docs-lab-apg-small/postgresql
```

If a log group with the specified name exists, Aurora uses that log group to export log data for the Aurora DB cluster. Each DB instance in the Aurora PostgreSQL DB cluster uploads its PostgreSQL log to the log group as a distinct log stream. You can examine the log group and its log streams using the various graphical and analytical tools available in Amazon CloudWatch.

For example, you can search for information within the log events from your Aurora PostgreSQL DB cluster, and filter events by using the CloudWatch Logs console, the Amazon CLI, or the CloudWatch Logs API. For more information, Searching and filtering log data in the *Amazon CloudWatch Logs User Guide*.

By default, new log groups are created using **Never expire** for their retention period. You can use the CloudWatch Logs console, the Amazon CLI, or the CloudWatch Logs API to change the log retention period. To learn more, see Change log data retention in CloudWatch Logs in the *Amazon CloudWatch Logs User Guide*.

> **Tip**
>
> You can use automated configuration, such as Amazon CloudFormation, to create log groups with predefined log retention periods, metric filters, and access permissions.


Analyzing PostgreSQL logs using CloudWatch Logs Insights

With the PostgreSQL logs from your Aurora PostgreSQL DB cluster published as CloudWatch Logs, you can use CloudWatch Logs Insights to interactively search and analyze your log data in Amazon CloudWatch Logs. CloudWatch Logs Insights includes a query language, sample queries, and other tools for analyzing your log data so that you can identify potential issues and verify fixes. To learn more, see Analyzing log data with CloudWatch Logs Insights in the *Amazon CloudWatch Logs User Guide*.

To analyze PostgreSQL logs with CloudWatch Logs Insights


1. Open the CloudWatch console at https://console.amazonaws.cn/cloudwatch/.

2. In the navigation pane, open **Logs** and choose **Log insights**.
3. In **Select log group(s)**, select the log group for your Aurora PostgreSQL DB cluster.

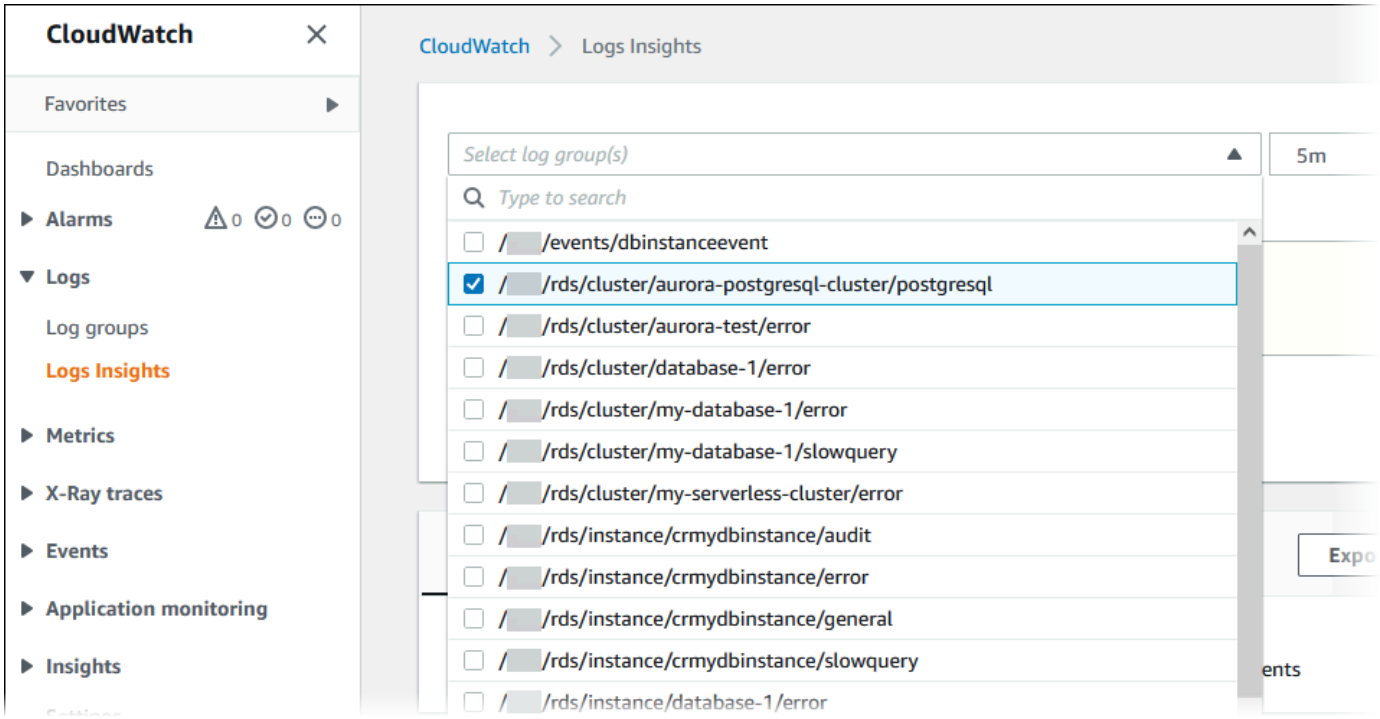


4. In the query editor, delete the query that is currently shown, enter the following, and then choose **Run query**.


```
##Autovacuum execution time in seconds per 5 minute
fields @message
| parse @message "elapsed: * s" as @duration_sec
| filter @message like / automatic vacuum /
| display @duration_sec
| sort @timestamp
| stats avg(@duration_sec) as avg_duration_sec,
max(@duration_sec) as max_duration_sec
by bin(5 min)
```

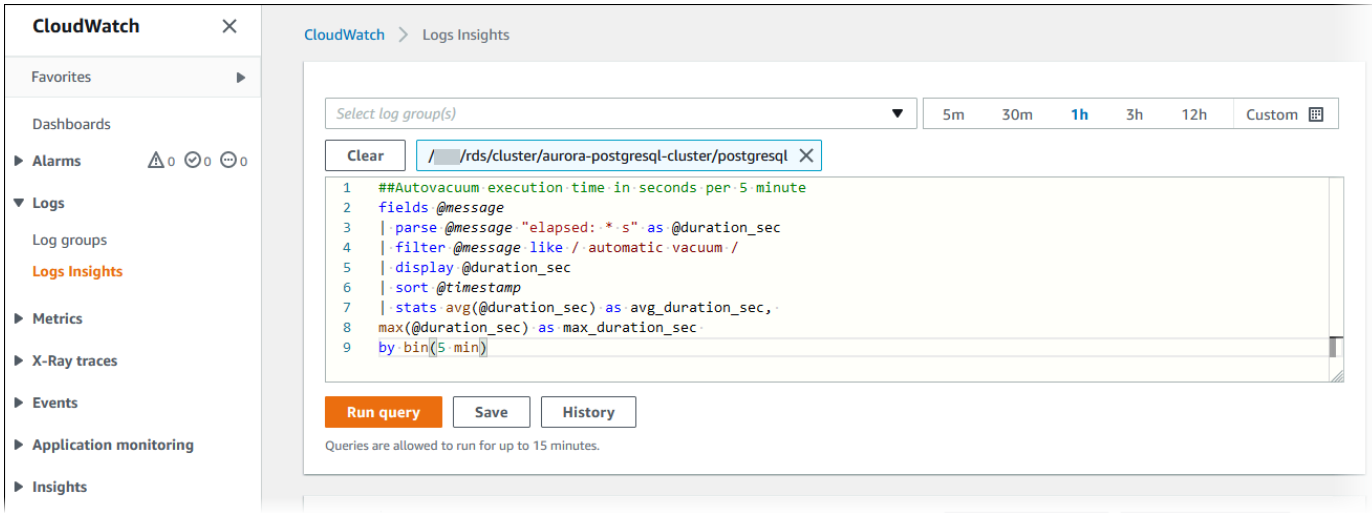

5. Choose the **Visualization** tab.

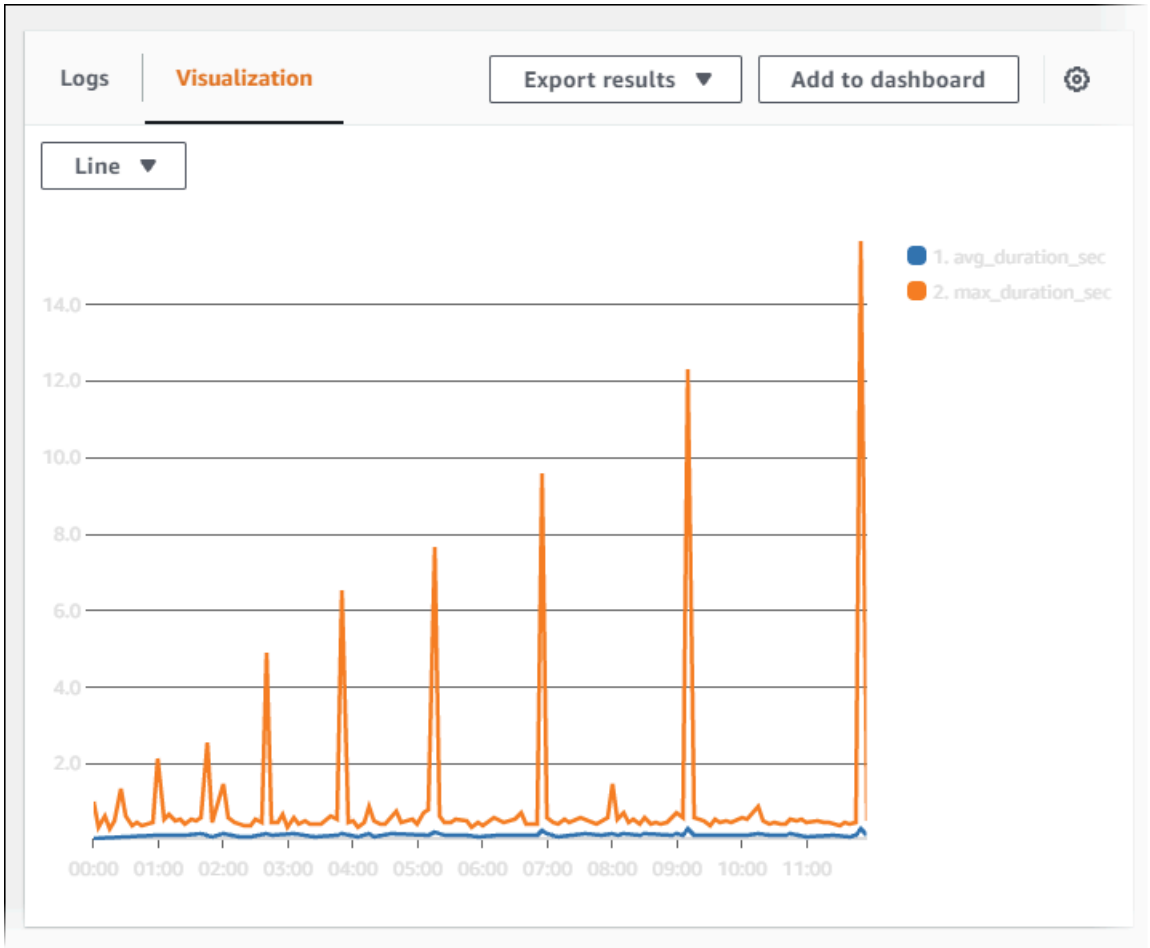


6. Choose **Add to dashboard**.
7. In **Select a dashboard**, either select a dashboard or enter a name to create a new dashboard.
8. In **Widget type**, choose a widget type for your visualization.

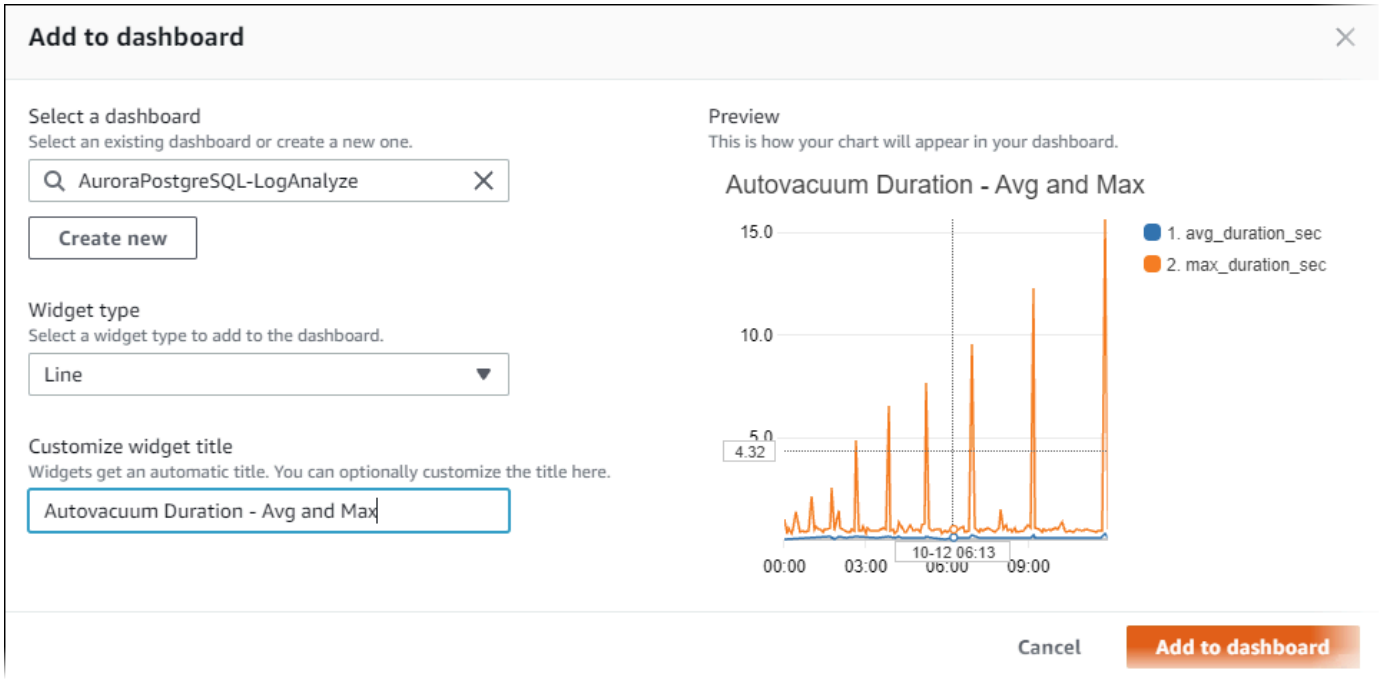


9. (Optional) Add more widgets based on your log query results.

   a. Choose **Add widget**.

   b. Choose a widget type, such as **Line**.

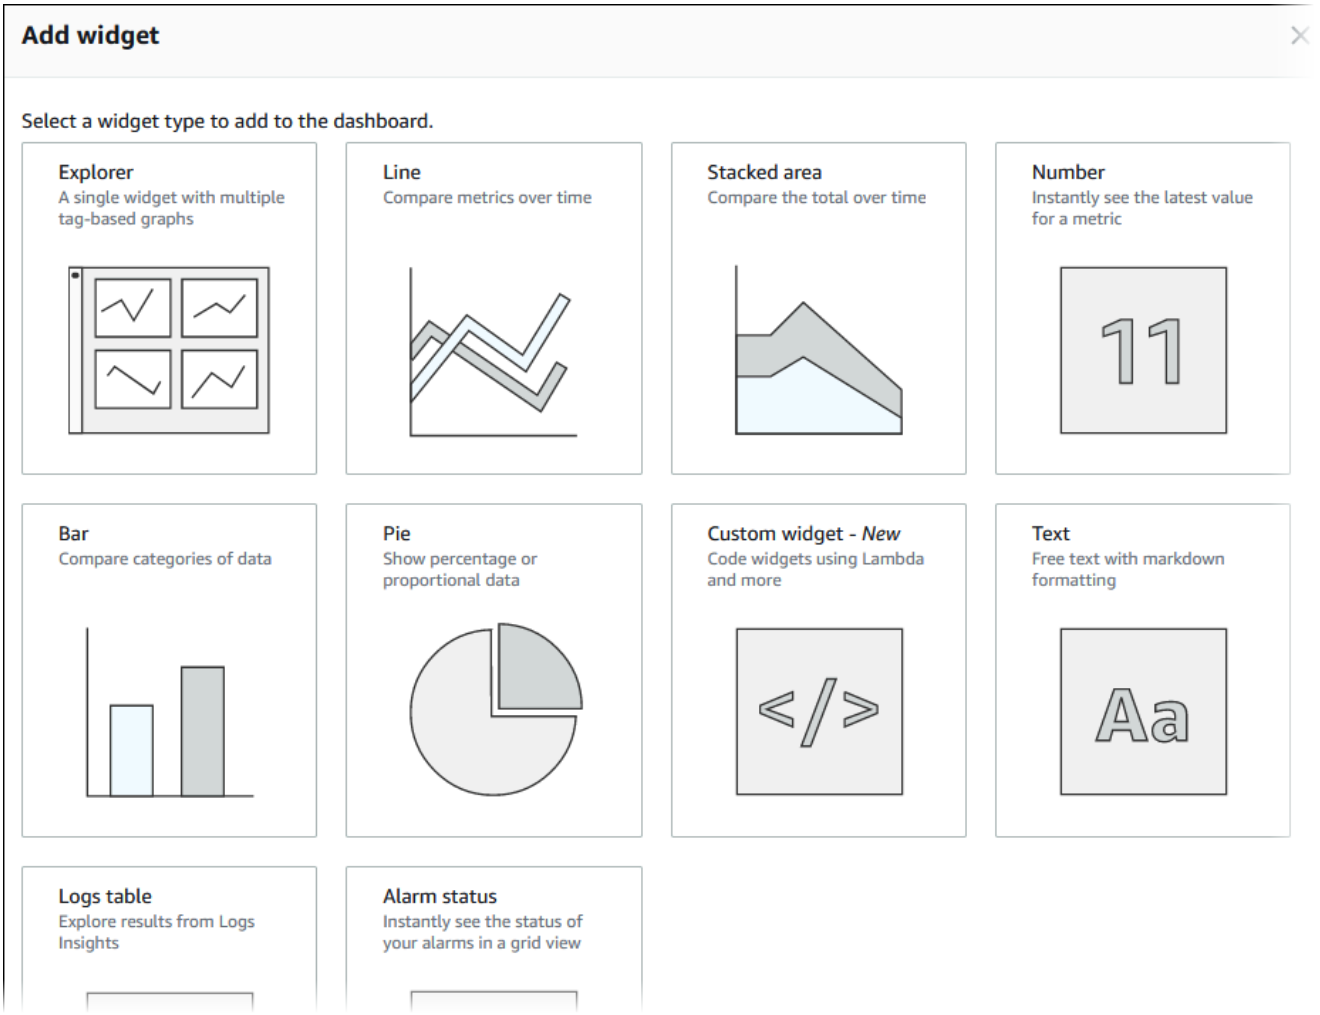

c. In the **Add to this dashboard** window, choose **Logs**.

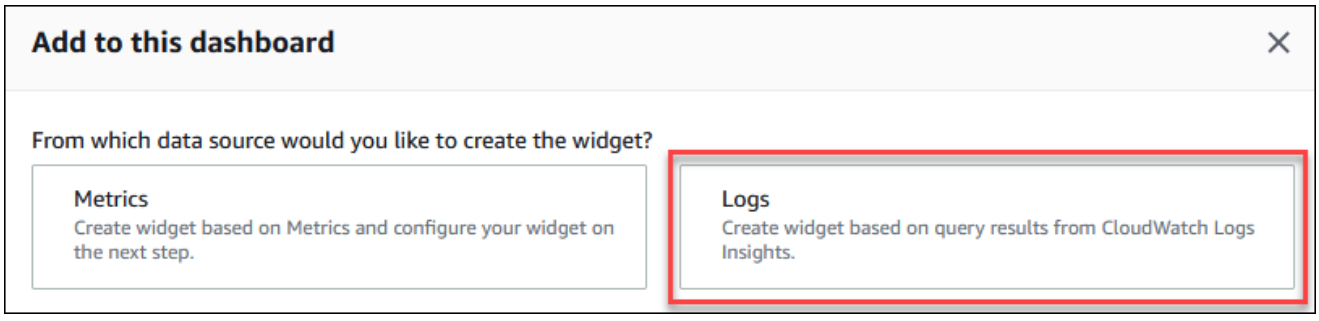


d. In **Select log group(s)**, select the log group for your DB cluster.

e. In the query editor, delete the query that is currently shown, enter the following, and then choose **Run query**.


```
##Autovacuum tuples statistics per 5 min
fields @timestamp, @message
| parse @message "tuples: " as @tuples_temp
```

```
| parse @tuples_temp "* removed," as @tuples_removed
| parse @tuples_temp "remain, * are dead but not yet removable, " as
 @tuples_not_removable
| filter @message like / automatic vacuum /
| sort @timestamp
| stats  avg(@tuples_removed) as avg_tuples_removed,
avg(@tuples_not_removable) as avg_tuples_not_removable
by bin(5 min)
```

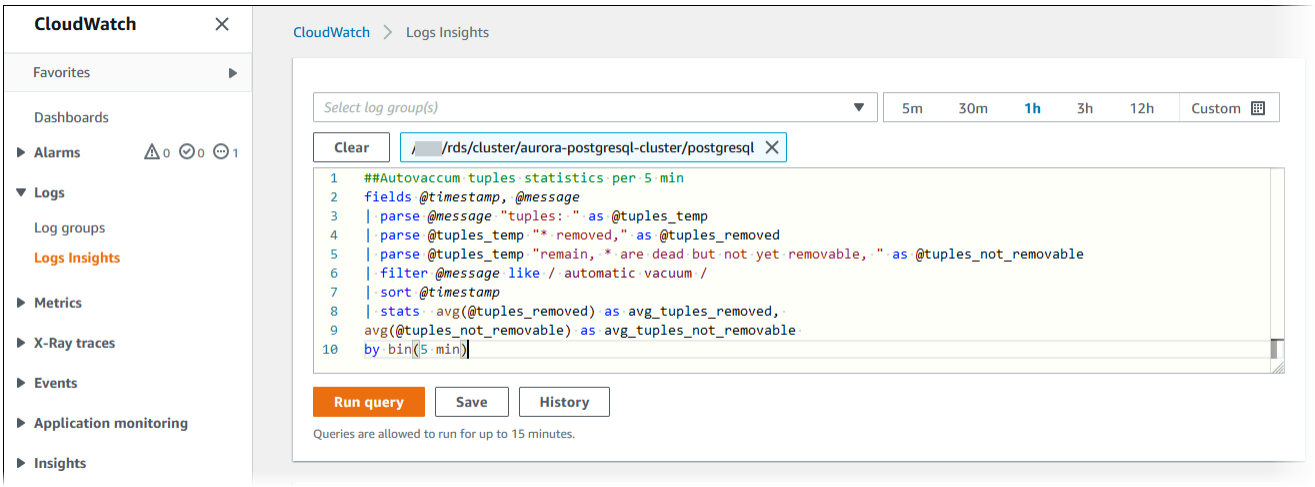

f. Choose **Create widget**.

Your dashboard should look similar to the following image.

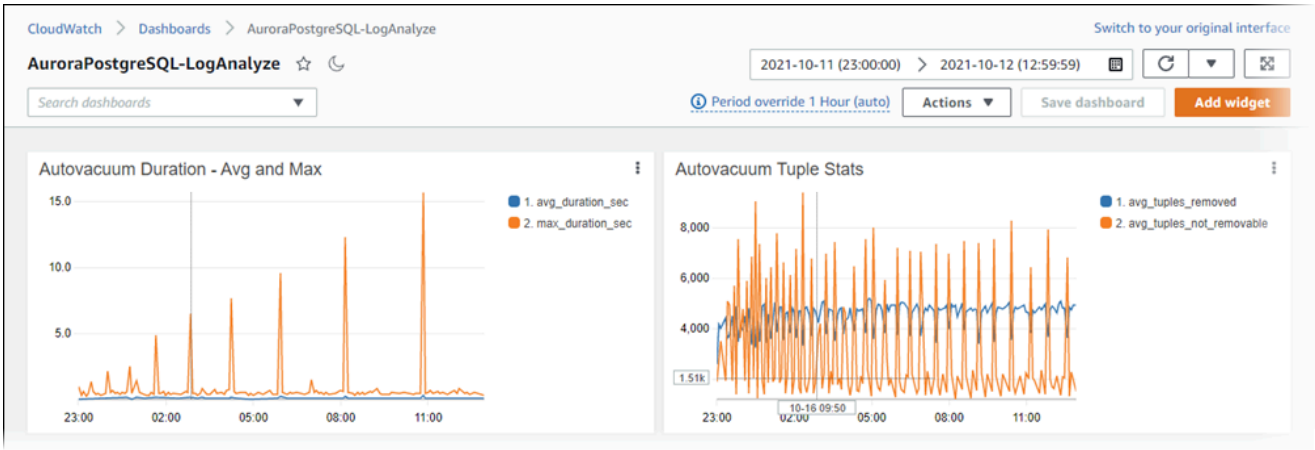

Monitoring query execution plans and peak memory for Aurora PostgreSQL

You can monitor query execution plans in your Aurora PostgreSQL DB instance to detect the execution plans contributing to current database load and to track performance statistics of execution plans over time using the `aurora_compute_plan_id` parameter. Whenever a query executes, the execution plan used by the query is assigned an identifier and the same identifier is used by subsequent executions of the same plan.

The `aurora_compute_plan_id` is turned `OFF` by default in DB parameter group from Aurora PostgreSQL versions 14.10, 15.5, and higher versions. To assign a plan identifier, set `aurora_compute_plan_id` to `ON` in the parameter group. To track query execution plans, `pg_stat_statements` must also be in the `shared_preload_libraries` parameter of your DB parameter group. `shared_preload_libraries` includes `pg_stat_statements` by default, so verify that `pg_stat_statements` hasn't been removed.

This plan identifier is used in several utilities that serve a different purpose.

You can also analyze and compare these execution plans in the CloudWatch console by using the Advanced mode of CloudWatch Database Insights. For more information about analyzing execution plans in the CloudWatch console, see Analyzing execution plans with CloudWatch Database Insights in the *Amazon CloudWatch User Guide*.

You can monitor query peak memory usage in your DB instance to detect queries contributing to high database memory use from the following versions:

- 16.3 and all higher versions
- 15.7 and higher versions
- 14.12 and higher versions

Whenever a query runs, the peak memory used by the query is tracked. Queries typically run many times; the average, minimum and maximum memory usage values across all runs can be viewed for each query.

Topics


- Accessing query execution plans and peak memory using Aurora functions
- Parameter reference for Aurora PostgreSQL query execution plans

Accessing query execution plans and peak memory using Aurora functions

With `aurora_compute_plan_id`, you can access the execution plans using the following functions:

- aurora_stat_activity
- aurora_stat_plans

The query peak memory does not include memory that is allocated before query processing starts. Peak memory usage is tracked and reported separately for the planning and execution phases of each query.

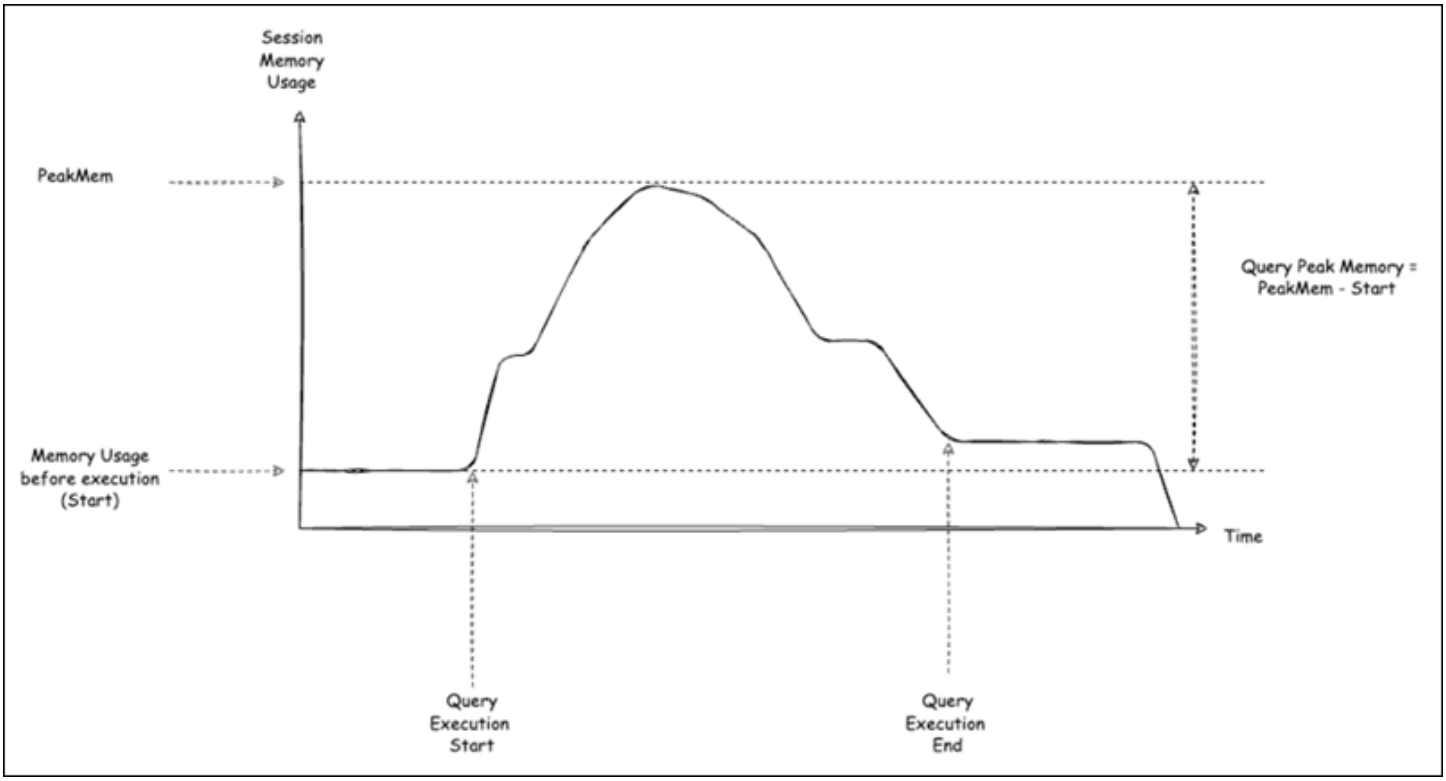

You can access the query peak memory statistics using the following functions:

- aurora_stat_statements
- aurora_stat_plans

For more information on these functions, see Aurora PostgreSQL functions reference.

Parameter reference for Aurora PostgreSQL query execution plans

You can monitor the query execution plans using the below parameters in a DB parameter group.

Parameters

- aurora_compute_plan_id
- aurora_stat_plans.minutes_until_recapture
- aurora_stat_plans.calls_until_recapture
- aurora_stat_plans.with_costs
- aurora_stat_plans.with_analyze
- aurora_stat_plans.with_timing
- aurora_stat_plans.with_buffers
- aurora_stat_plans.with_wal
- aurora_stat_plans.with_triggers

> **Note**
>
> The configuration for `aurora_stat_plans.with_*` parameters takes effect only for newly captured plans.

aurora_compute_plan_id

The `aurora_compute_plan_id` is a configuration parameter that controls whether a plan identifier is assigned during query execution.

Default	Allowed values	Description
off	0(off)	Set to `off` to prevent a plan identifier from being assigned.
	1(on)	Set to on to assign a plan identifier.

aurora_stat_plans.minutes_until_recapture

The number of minutes to pass before a plan is recaptured. Default is 0 which will disable recapturing a plan. When the `aurora_stat_plans.calls_until_recapture` threshold is passed, the plan will be recaptured.

Default	Allowed values	Description
0	0-1073741823	Set the number of minutes to pass before a plan is recaptured.

aurora_stat_plans.calls_until_recapture

The number of calls to a plan before it is recaptured. Default is 0 which will disable recapturing a plan after a number of calls. When the `aurora_stat_plans.minutes_until_recapture` threshold is passed, the plan will be recaptured.

Default	Allowed values	Description
0	0-1073741823	Set the number of calls before a plan is recaptured.

aurora_stat_plans.with_costs

Captures an EXPLAIN plan with estimated costs. The allowed values are on and `off`. The default is on.

Default	Allowed values	Description
on	0(off)	Doesn't show estimated cost and rows for each plan node.
	1(on)	Shows estimated cost and rows for each plan node.

aurora_stat_plans.with_analyze

Controls the EXPLAIN plan with ANALYZE. This mode is only used the first time a plan is captured. The allowed values are on and `off`. The default is `off`.

Default	Allowed values	Description
off	0(off)	Doesn't include actual run time statistics for the plan.
	1(on)	Includes actual run time statistics for the plan.

aurora_stat_plans.with_timing

Plan timing will be captured in the explain when ANALYZE is used. The default is on.

Default	Allowed values	Description
on	0(off)	Doesn't include actual start up time and time spent in each plan node.
	1(on)	Includes actual start up time and time spent in each plan node.

aurora_stat_plans.with_buffers

Plan buffer usage statistics will be captured in the explain when ANALYZE is used. The default is `off`.

Default	Allowed values	Description
off	0(off)	Doesn't include information on buffer usage.
	1(on)	Includes information on buffer usage.

aurora_stat_plans.with_wal

Plan wal usage statistics will be captured in the explain when ANALYZE is used. The default is `off`.

Default	Allowed values	Description
off	0(off)	Doesn't include information on WAL record generation.

Default	Allowed values	Description
	1(on)	Includes information on WAL record generation.

aurora_stat_plans.with_triggers

Plan trigger execution statistics will be captured in the explain when ANALYZE is used. The default is `off`.

Default	Allowed values	Description
off	0(off)	Doesn't include triggers execution statistics.
	1(on)	Includes triggers execution statistics.

Managing query execution plans for Aurora PostgreSQL

Aurora PostgreSQL query plan management is an optional feature that you can use with your Amazon Aurora PostgreSQL-Compatible Edition DB cluster. This feature is packaged as the `apg_plan_mgmt` extension that you can install in your Aurora PostgreSQL DB cluster. Query plan management allows you to manage the query execution plans generated by the optimizer for your SQL applications. The `apg_plan_mgmt` Amazon extension builds on the native query processing functionality of the PostgreSQL database engine.

Following, you can find information about Aurora PostgreSQL query plan management features, how to set it up, and how to use it with your Aurora PostgreSQL DB cluster. Before you get started, we recommend that you review any release notes for the specific version of the `apg_plan_mgmt` extension available for your Aurora PostgreSQL version. For more information, see Aurora PostgreSQL apg_plan_mgmt extension versions in the *Release Notes for Aurora PostgreSQL*.

Topics

- Overview of Aurora PostgreSQL query plan management
- Best practices for Aurora PostgreSQL query plan management
- Aurora PostgreSQL query plan management
- Capturing Aurora PostgreSQL execution plans
- Using Aurora PostgreSQL managed plans
- Examining Aurora PostgreSQL query plans in the dba_plans view
- Improving Aurora PostgreSQL query plans
- Deleting Aurora PostgreSQL query plans
- Exporting and importing managed plans for Aurora PostgreSQL
- Parameter reference for Aurora PostgreSQL query plan management
- Function reference for Aurora PostgreSQL query plan management
- Reference for the apg_plan_mgmt.dba_plans view for Aurora PostgreSQL-Compatible Edition
- Advanced features in Query Plan Management

Overview of Aurora PostgreSQL query plan management

Aurora PostgreSQL query plan management is designed to ensure plan stability regardless of changes to the database that might cause query plan regression. *Query plan regression* occurs when

the optimizer chooses a sub-optimal plan for a given SQL statement after system or database changes. Changes to statistics, constraints, environment settings, query parameter bindings, and upgrades to the PostgreSQL database engine can all cause plan regression.

With Aurora PostgreSQL query plan management, you can control how and when query execution plans change. The benefits of Aurora PostgreSQL query plan management include the following.

- Improve plan stability by forcing the optimizer to choose from a small number of known, good plans.
- Optimize plans centrally and then distribute the best plans globally.
- Identify indexes that aren't used and assess the impact of creating or dropping an index.
- Automatically detect a new minimum-cost plan discovered by the optimizer.
- Try new optimizer features with less risk, because you can choose to approve only the plan changes that improve performance.

You can use the tools provided by query plan management proactively, to specify the best plan for certain queries. Or you can use query plan management to react to changing circumstances and avoid plan regressions. For more information, see Best practices for Aurora PostgreSQL query plan management.

Topics

- Supported SQL statements
- Query plan management limitations
- Query plan management terminology
- Aurora PostgreSQL query plan management versions
- Turning on Aurora PostgreSQL query plan management
- Upgrading Aurora PostgreSQL query plan management
- Turning off Aurora PostgreSQL query plan management

Supported SQL statements

Query plan management supports the following types of SQL statements.

- Any SELECT, INSERT, UPDATE, or DELETE statement, regardless of complexity.
- Prepared statements. For more information, see PREPARE in the PostgreSQL documentation.

- Dynamic statements, including those run in immediate-mode. For more information, see Dynamic SQL and EXECUTE IMMEDIATE in PostgreSQL documentation.
- Embedded SQL commands and statements. For more information, see Embedded SQL Commands in the PostgreSQL documentation.
- Statements inside named functions. For more information, see CREATE FUNCTION in the PostgreSQL documentation.
- Statements containing temp tables.
- Statements inside procedures and DO-blocks.

You can use query plan management with `EXPLAIN` in manual mode to capture a plan without actually running it. For more information, see Analyzing the optimizer's chosen plan. To learn more about query plan management's modes (manual, automatic), see Capturing Aurora PostgreSQL execution plans.

Aurora PostgreSQL query plan management supports all PostgreSQL language features, including partitioned tables, inheritance, row-level security, and recursive common table expressions (CTEs). To learn more about these PostgreSQL language features, see Table Partitioning, Row Security Policies, and WITH Queries (Common Table Expressions) and other topics in the PostgreSQL documentation.

For information about different versions of the Aurora PostgreSQL query plan management feature, see Aurora PostgreSQL apg_plan_mgmt extension versions in the *Release Notes for Aurora PostgreSQL*.

Query plan management limitations

The current release of Aurora PostgreSQL query plan management has the following limitations.

- **Plans aren't captured for statements that reference system relations** – Statements that reference system relations, such as `pg_class`, aren't captured. This is by design, to prevent a large number of system-generated plans that are used internally from being captured. This also applies to system tables inside views.
- **Larger DB instance class might be needed for your Aurora PostgreSQL DB cluster** – Depending on the workload, query plan management might need a DB instance class that has more than 2 vCPUs. The number of `max_worker_processes` is limited by the DB instance class size. The number of `max_worker_processes` provided by a 2-vCPU DB instance class (db.t3.medium,

for example) might not be sufficient for a given workload. We recommend that you choose a DB instance class with more than 2 vCPUs for your Aurora PostgreSQL DB cluster if you use query plan managment.

When the DB instance class can't support the workload, query plan management raises an error message such as the following.

```
WARNING: could not register plan insert background process
HINT: You may need to increase max_worker_processes.
```

In this case, you should scale up your Aurora PostgreSQL DB cluster to a DB instance class size with more memory. For more information, see Supported DB engines for DB instance classes.

- **Plans already stored in sessions aren't affected** – Query plan management provides a way to influence query plans without changing the application code. However, when a generic plan is already stored in an existing session and if you want to change its query plan, then you must first set`plan_cache_mode` to `force_custom_plan` in the DB cluster parameter group.
- `queryid` in `apg_plan_mgmt.dba_plans` and `pg_stat_statements` can diverge when:
  - Objects are dropped and recreated after storing in apg_plan_mgmt.dba_plans.
  - `apg_plan_mgmt.plans` table is imported from another cluster.

For information about different versions of the Aurora PostgreSQL query plan management feature, see Aurora PostgreSQL apg_plan_mgmt extension versions in the *Release Notes for Aurora PostgreSQL*.

Query plan management terminology

The following terms are used throughout this topic.

managed statement

A SQL statement captured by the optimizer under query plan management. A managed statement has one or more query execution plans stored in the `apg_plan_mgmt.dba_plans` view.

plan baseline

The set of approved plans for a given managed statement. That is, all the plans for the managed statement that have "Approved" for their `status` column in the dba_plan view.

plan history

The set of all captured plans for a given managed statement. The plan history contains all plans captured for the statement, regardless of status.

query plan regression

The case when the optimizer chooses a less optimal plan than it did before a given change to the database environment, such as a new PostgreSQL version or changes to statistics.

Aurora PostgreSQL query plan management versions

Query plan management is supported by all currently available Aurora PostgreSQL releases. For more information, see the list of Amazon Aurora PostgreSQL updates in the *Release Notes for Aurora PostgreSQL*.

Query plan management functionality is added to your Aurora PostgreSQL DB cluster when you install the `apg_plan_mgmt` extension. Different versions of Aurora PostgreSQL support different versions of the `apg_plan_mgmt` extension. We recommend that you upgrade the query plan management extension to the latest release for your version of Aurora PostgreSQL.

> **Note**
>
> For release notes for each `apg_plan_mgmt` extension versions, see Aurora PostgreSQL apg_plan_mgmt extension versions in the *Release Notes for Aurora PostgreSQL*.

You can identify the version running on your cluster by connecting to an instance using `psql` and using the metacommand \dx to list extensions as shown following.

```
labdb=> \dx
                      List of installed extensions
     Name      | Version |    Schema     |                              Description
---------------+---------+---------------
+-------------------------------------------------------------------
 apg_plan_mgmt | 1.0     | apg_plan_mgmt | Amazon Aurora with PostgreSQL compatibility
 Query Plan Management
 plpgsql       | 1.0     | pg_catalog    | PL/pgSQL procedural language
(2 rows)
```

The output shows that this cluster is using 1.0 version of the extension. Only certain `apg_plan_mgmt` versions are available for a given Aurora PostgreSQL version. In some cases, you might need to upgrade the Aurora PostgreSQL DB cluster to a new minor release or apply a patch so that you can upgrade to the most recent version of query plan management. The `apg_plan_mgmt` version 1.0 shown in the output is from an Aurora PostgreSQL version 10.17 DB cluster, which doesn't have a newer version of `apg_plan_mgmt` available. In this case, the Aurora PostgreSQL DB cluster should be upgraded to a more recent version of PostgreSQL.

For more information about upgrading your Aurora PostgreSQL DB cluster to a new version of PostgreSQL, see Database engine updates for Amazon Aurora PostgreSQL.

To learn how to upgrade the `apg_plan_mgmt` extension, see Upgrading Aurora PostgreSQL query plan management.

Turning on Aurora PostgreSQL query plan management

Setting up query plan management for your Aurora PostgreSQL DB cluster involves installing an extension and changing several DB cluster parameter settings. You need `rds_superuser` permissions to install the `apg_plan_mgmt` extension and to turn on the feature for the Aurora PostgreSQL DB cluster.

Installing the extension creates a new role, `apg_plan_mgmt`. This role allows database users to view, manage, and maintain query plans. As an administrator with `rds_superuser` privileges, be sure to grant the `apg_plan_mgmt` role to database users as needed.


Only users with the `rds_superuser` role can complete the following procedure. The `rds_superuser` is required for creating the `apg_plan_mgmt` extension and its `apg_plan_mgmt` role. Users must be granted the `apg_plan_mgmt` role to administer the `apg_plan_mgmt` extension.

To turn on query plan management for your Aurora PostgreSQL DB cluster

The following steps turn on query plan management for all SQL statements that get submitted to the Aurora PostgreSQL DB cluster. This is known as *automatic* mode. To learn more about the difference between modes, see Capturing Aurora PostgreSQL execution plans.

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Create a custom DB cluster parameter group for your Aurora PostgreSQL DB cluster. You need to change certain parameters to activate query plan management and to set its behavior. For more information, see Creating a DB parameter group in Amazon Aurora.

3. Open the custom DB cluster parameter group and set the `rds.enable_plan_management` parameter to 1, as shown in the following image.

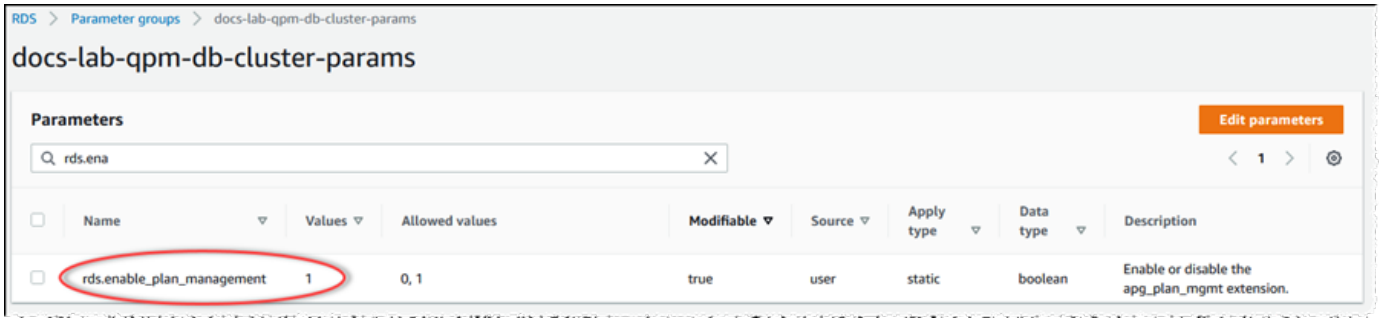

   For more information, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

4. Create a custom DB parameter group that you can use to set query plan parameters at the instance level. For more information, see Creating a DB cluster parameter groupin Amazon Aurora.
5. Modify the writer instance of the Aurora PostgreSQL DB cluster to use the custom DB parameter group. For more information, see Modifying a DB instance in a DB cluster.
6. Modify the Aurora PostgreSQL DB cluster to use the custom DB cluster parameter group. For more information, see Modifying the DB cluster by using the console, CLI, and API.
7. Reboot your DB instance to enable the custom parameter group settings.
8. Connect to your Aurora PostgreSQL DB cluster's DB instance endpoint using `psql` or pgAdmin. The following example uses the default `postgres` account for the `rds_superuser` role.

```
psql --host=cluster-instance-1.111122223333.aws-region.rds.amazonaws.com --
port=5432 --username=postgres --password --dbname=my-db
```

9. Create the `apg_plan_mgmt` extension for your DB instance, as shown following.

```
labdb=> CREATE EXTENSION apg_plan_mgmt;
CREATE EXTENSION
```

> **Tip**
>
> Install the `apg_plan_mgmt` extension in the template database for your application. The default template database is named `template1`. To learn more, see Template Databases in the PostgreSQL documentation.

10. Change the `apg_plan_mgmt.capture_plan_baselines` parameter to `automatic`. This setting causes the optimizer to generate plans for every SQL statement that is either planned or executed two or more times.

    > **Note**
    >
    > Query plan management also has a *manual* mode that you can use for specific SQL statements. To learn more, see Capturing Aurora PostgreSQL execution plans.

11. Change the value of `apg_plan_mgmt.use_plan_baselines` parameter to "on." This parameter causes the optimizer to choose a plan for the statement from its plan baseline. To learn more, see Using Aurora PostgreSQL managed plans.

    > **Note**
    >
    > You can modify the value of either of these dynamic parameters for the session without needing to reboot the instance.

When your query plan management set up is complete, be sure to grant the `apg_plan_mgmt` role to any database users that need to view, manage, or maintain query plans.

Upgrading Aurora PostgreSQL query plan management

We recommend that you upgrade the query plan management extension to the latest release for your version of Aurora PostgreSQL.

1. Connect to the writer instance of your Aurora PostgreSQL DB cluster as a user that has `rds_superuser` privileges. If you kept the default name when you set up your instance, you connect as `postgres` This example shows how to use `psql`, but you can also use pgAdmin if you prefer.

   ```
   psql --host=111122223333.aws-region.rds.amazonaws.com --port=5432 --
   username=postgres --password
   ```

2. Run the following query to upgrade the extension.

   ```
   ALTER EXTENSION apg_plan_mgmt UPDATE TO '2.1';
   ```

3. Use the apg_plan_mgmt.validate_plans function to update the hashes of all plans. The optimizer validates all Approved, Unapproved, and Rejected plans to ensure that they's still viable plans for new version of the extension.

   ```
   SELECT apg_plan_mgmt.validate_plans('update_plan_hash');
   ```

   To learn more about using this function, see Validating plans.

4. Use the apg_plan_mgmt.reload function to refresh any plans in the shared memory with the validated plans from the dba_plans view.

   ```
   SELECT apg_plan_mgmt.reload();
   ```

To learn more about all functions available for query plan management, see Function reference for Aurora PostgreSQL query plan management.

Turning off Aurora PostgreSQL query plan management

You can disable query plan management at any time by turning off the `apg_plan_mgmt.use_plan_baselines` and `apg_plan_mgmt.capture_plan_baselines`.

```
labdb=> SET apg_plan_mgmt.use_plan_baselines = off;

labdb=> SET apg_plan_mgmt.capture_plan_baselines = off;
```

Best practices for Aurora PostgreSQL query plan management

Query plan management lets you control how and when query execution plans change. As a DBA, your main goals when using QPM include preventing regressions when there are changes to your database, and controlling whether to allow the optimizer to use a new plan. In the following, you can find some recommended best practices for using query plan management. Proactive and reactive plan management approaches differ in how and when new plans get approved for use.

Contents

- Proactive plan management to help prevent performance regression
  - Ensuring plan stability after a major version upgrade
    - Version-specific considerations

    - Amazon Aurora PostgreSQL version 18 and later
- Reactive plan management to detect and repair performance regressions

Proactive plan management to help prevent performance regression

To prevent plan performance regressions from occurring, you *evolve* plan baselines by running a procedure that compares the performance of newly discovered plans to the performance of the existing baseline of Approved plans, and then automatically approves the fastest set of plans as the new baseline. In this way, the baseline of plans improves over time as faster plans are discovered.

1. In a development environment, identify the SQL statements that have the greatest impact on performance or system throughput. Then capture the plans for these statements as described in Manually capturing plans for specific SQL statements and Automatically capturing plans.
2. Export the captured plans from the development environment and import them into the production environment. For more information, see Exporting and importing managed plans for Aurora PostgreSQL.
3. In production, run your application and enforce the use of approved managed plans. For more information, see Using Aurora PostgreSQL managed plans. While the application runs, also add new plans as the optimizer discovers them. For more information, see Automatically capturing plans.
4. Analyze the unapproved plans and approve those that perform well. For more information, see Evaluating plan performance.
5. While your application continues to run, the optimizer begins to use the new plans as appropriate.

Ensuring plan stability after a major version upgrade

Each major version of PostgreSQL includes enhancements and changes to the query optimizer that are designed to improve performance. However, query execution plans generated by the optimizer in earlier versions might cause performance regressions in newer upgraded versions. You can use query plan management to resolve these performance issues and to ensure plan stability after a major version upgrade.

The optimizer always uses a minimum-cost Approved plan, even if more than one Approved plan for the same statement exists. After an upgrade the optimizer might discover new plans but they will be saved as Unapproved plans. These plans are performed only if approved

using the reactive style of plan management with the unapproved_plan_execution_threshold parameter. You can maximize plan stability using the proactive style of plan management with the evolve_plan_baselines parameter. This compares the performance of the new plans to the old plans and approves or rejects plans that are at least 10% faster than the next best plan.

After upgrading, you can use the `evolve_plan_baselines` function to compare plan performance before and after the upgrade using your query parameter bindings. The following steps assume that you have been using approved managed plans in your production environment, as detailed in Using Aurora PostgreSQL managed plans.

1. Before upgrading, run your application with the query plan manager running. While the application runs, add new plans as the optimizer discovers them. For more information, see Automatically capturing plans.
2. Evaluate each plan's performance. For more information, see Evaluating plan performance.
3. After upgrading, analyze your approved plans again using the `evolve_plan_baselines` function. Compare performance before and after using your query parameter bindings. If the new plan is fast, you can add it to your approved plans. If it's faster than another plan for the same parameter bindings, then you can mark the slower plan as Rejected.

   For more information, see Approving better plans. For reference information about this function, see apg_plan_mgmt.evolve_plan_baselines.

For more information, see Ensuring consistent performance after major version upgrades with Amazon Aurora PostgreSQL-Compatible Edition Query Plan Management.

> **Note**
>
> When you perform a major version upgrade using logical replication or Amazon DMS, make sure that you replicate the `apg_plan_mgmt` schema to ensure existing plans are copied to the upgraded instance. For more information on logical replication, see Using logical replication to perform a major version upgrade for Aurora PostgreSQL.

For information about upgrading the query plan management extension, see Upgrading Aurora PostgreSQL query plan management.

Version-specific considerations

Amazon Aurora PostgreSQL version 18 and later

After upgrading to Aurora PostgreSQL version 18 and later, queries that include preceding C-style comments (`/* ... */`) have a different `sql_hash` than in previous versions. For these queries, the plan `status` and `enabled` settings captured before the upgrade are not automatically applied because the SQL hashes differ.

To manage affected queries, run `apg_plan_mgmt.evolve_plan_baselines()` after the upgrade. The function evaluates all captured plans for the same query, regardless of whether they were captured under the previous or current `sql_hash`. It then applies the appropriate action based on relative performance. After evaluation, plans are associated with the current `sql_hash` value.

Reactive plan management to detect and repair performance regressions

By monitoring your application as it runs, you can detect plans that cause performance regressions. When you detect regressions, you manually reject or fix the bad plans by following these steps:

1. While your application runs, enforce the use of managed plans and automatically add newly discovered plans as unapproved. For more information, see Using Aurora PostgreSQL managed plans and Automatically capturing plans.
2. Monitor your running application for performance regressions.
3. When you discover a plan regression, set the plan's status to `rejected`. The next time the optimizer runs the SQL statement, it automatically ignores the rejected plan and uses a different approved plan instead. For more information, see Rejecting or disabling slower plans.

   In some cases, you might prefer to fix a bad plan rather than reject, disable, or delete it. Use the `pg_hint_plan` extension to experiment with improving a plan. With `pg_hint_plan`, you use special comments to tell the optimizer to override how it normally creates a plan. For more information, see Fixing plans using pg_hint_plan.

Aurora PostgreSQL query plan management

With query plan management turned on for your Aurora PostgreSQL DB cluster, the optimizer generates and stores query execution plans for any SQL statement that it processes more than once. The optimizer always sets the status of a managed statement's first generated plan to `Approved`, and stores it in the `dba_plans` view.

The set of approved plans saved for a managed statement is known as its *plan baseline*. As your application runs, the optimizer might generate additional plans for managed statements. The optimizer sets additional captured plans to a status of `Unapproved`.

Later, you can decide if the `Unapproved` plans perform well and change them to `Approved`, `Rejected`, or `Preferred`. To do so, you use the `apg_plan_mgmt.evolve_plan_baselines` function or the `apg_plan_mgmt.set_plan_status` function.

When the optimizer generates a plan for a SQL statement, query plan management saves the plan in the `apg_plan_mgmt.plans` table. Database users that have been granted the `apg_plan_mgmt` role can see the plan details by querying the `apg_plan_mgmt.dba_plans` view. For example, the following query lists details for plans currently in the view for a non-production Aurora PostgreSQL DB cluster.

- `sql_hash` – An identifier for the SQL statement that's the hash value for the normalized text of the SQL statement.
- `plan_hash` – A unique identifier for the plan that's a combination of the `sql_hash` and a hash of the plan.
- `status` – The status of the plan. The optimizer can run an approved plan.
- `enabled` – Indicates whether the plan is ready to use (true) or not (false).
- `plan_outline` – A representation of the plan that's used to recreate the actual execution plan. Operators in the tree structure map to operators in EXPLAIN output.

The `apg_plan_mgmt.dba_plans` view has many more columns that contain all details of the plan, such as when the plan was last used. For complete details, see Reference for the apg_plan_mgmt.dba_plans view for Aurora PostgreSQL-Compatible Edition.

Normalization and the SQL hash

In the `apg_plan_mgmt.dba_plans` view, you can identify a managed statement by its SQL hash value. The SQL hash is calculated on a normalized representation of the SQL statement that removes some differences, such as literal values.

The *normalization* process for each SQL statement preserves space and case, so that you can still read and understand the gist of the SQL statement. Normalization removes or replaces the following items.

- Leading block comments

- The EXPLAIN keyword and EXPLAIN options, and EXPLAIN ANALYZE
- Trailing spaces
- All literals

As an example, take the following statement.

```
/*Leading comment*/ EXPLAIN SELECT /* Query 1 */ * FROM t WHERE x > 7 AND y = 1;
```

The query plan management normalizes this statement as shown:

```
SELECT /* Query 1 */ * FROM t WHERE x > CONST AND y = CONST;
```

Normalization allows the same SQL hash to be used for similar SQL statements that might differ only in their literal or parameter values. In other words, multiple plans for the same SQL hash can exist, with a different plan that's optimal under different conditions.

> **Note**
>
> A single SQL statement that's used with different schemas has different plans because it's bound to the specific schema at runtime. The planner uses the statistics for schema binding to choose the optimal plan.

To learn more about how the optimizer chooses a plan, see Using Aurora PostgreSQL managed plans. In that section, you can learn how to use `EXPLAIN` and `EXPLAIN ANALYZE` to preview a plan before it's actually used. For details, see Analyzing the optimizer's chosen plan. For an image that outlines the process for choosing a plan, see How the optimizer chooses which plan to run.

Capturing Aurora PostgreSQL execution plans

Aurora PostgreSQL query plan management offers two different modes for capturing query execution plans, automatic or manual. You choose the mode by setting the value of the `apg_plan_mgmt.capture_plans_baselines` to `automatic` or to `manual`. You can capture execution plans for specific SQL statements by using manual plan capture. Alternatively, you can capture all (or the slowest) plans that are executed two or more times as your application runs by using automatic plan capture.

When capturing plans, the optimizer sets the status of a managed statement's first captured plan to `approved`. The optimizer sets the status of any additional plans captured for a managed statement to `unapproved`. However, more than one plan might occasionally be saved with the `approved` status. This can happen when multiple plans are created for a statement in parallel and before the first plan for the statement is committed.

To control the maximum number of plans that can be captured and stored in the `dba_plans` view, set the `apg_plan_mgmt.max_plans` parameter in your DB instance-level parameter group. A change to the `apg_plan_mgmt.max_plans` parameter requires a DB instance reboot for a new value to take effect. For more information, see the apg_plan_mgmt.max_plans parameter.

Manually capturing plans for specific SQL statements

If you have a known set of SQL statements to manage, put the statements into a SQL script file and then manually capture plans. The following shows a psql example of how to capture query plans manually for a set of SQL statements.

```
psql> SET apg_plan_mgmt.capture_plan_baselines = manual;
psql> \i my-statements.sql
psql> SET apg_plan_mgmt.capture_plan_baselines = off;
```

After capturing a plan for each SQL statement, the optimizer adds a new row to the `apg_plan_mgmt.dba_plans` view.

We recommend that you use either EXPLAIN or EXPLAIN EXECUTE statements in the SQL script file. Make sure that you include enough variations in parameter values to capture all the plans of interest.

If you know of a better plan than the optimizer's minimum cost plan, you might be able to force the optimizer to use the better plan. To do so, specify one or more optimizer hints. For more information, see Fixing plans using pg_hint_plan. To compare the performance of the `unapproved` and `approved` plans and approve, reject, or delete them, see Evaluating plan performance.

Automatically capturing plans

Use automatic plan capture for situations such as the following:

- You don't know the specific SQL statements that you want to manage.
- You have hundreds or thousands of SQL statements to manage.

- Your application uses a client API. For example, JDBC uses unnamed prepared statements or bulk-mode statements that can't be expressed in psql.

To capture plans automatically

1. Turn on automatic plan capture by setting `apg_plan_mgmt.capture_plan_baselines` to `automatic` in the DB instance-level parameter group. For more information, see Modifying parameters in a DB parameter group in Amazon Aurora.
2. As the application runs, the optimizer captures plans for each SQL statement that runs at least twice.

   As the application runs with default query plan management parameter settings, the optimizer captures plans for each SQL statement that runs at least twice. Capturing all plans while using the defaults has very little run-time overhead and can be enabled in production.

To turn off automatic plan capture

- Set the `apg_plan_mgmt.capture_plan_baselines` parameter to `off` from the DB instance-level parameter group.

To measure the performance of the unapproved plans and approve, reject, or delete them, see Evaluating plan performance.

Using Aurora PostgreSQL managed plans

To get the optimizer to use captured plans for your managed statements, set the parameter `apg_plan_mgmt.use_plan_baselines` to `true`. The following is a local instance example.

```
SET apg_plan_mgmt.use_plan_baselines = true;
```

While the application runs, this setting causes the optimizer to use the minimum-cost, preferred, or approved plan that is valid and enabled for each managed statement.

Analyzing the optimizer's chosen plan

When the `apg_plan_mgmt.use_plan_baselines` parameter is set to `true`, you can use EXPLAIN ANALYZE SQL statements to cause the optimizer to show the plan it would use if it were to run the statement. The following is an example.

```
EXPLAIN ANALYZE EXECUTE rangeQuery (1,10000);
```

```
                                                        QUERY PLAN
-----------------------------------------------------------------------------
 Aggregate  (cost=393.29..393.30 rows=1 width=8) (actual time=7.251..7.251 rows=1
 loops=1)
   ->  Index Only Scan using t1_pkey on t1 t  (cost=0.29..368.29 rows=10000 width=0)
 (actual time=0.061..4.859 rows=10000 loops=1)
Index Cond: ((id >= 1) AND (id <= 10000))
         Heap Fetches: 10000
 Planning time: 1.408 ms
 Execution time: 7.291 ms
 Note: An Approved plan was used instead of the minimum cost plan.
 SQL Hash: 1984047223, Plan Hash: 512153379
```


The output shows the Approved plan from the baseline that would run. However, the output also shows that it found a lower-cost plan. In this case, you capture this new minimum cost plan by turning on automatic plan capture as described in Automatically capturing plans.

New plans are always captured by the optimizer as `Unapproved`. Use the `apg_plan_mgmt.evolve_plan_baselines` function to compare plans and change them to approved, rejected, or disabled. For more information, see Evaluating plan performance.

How the optimizer chooses which plan to run

The cost of an execution plan is an estimate that the optimizer makes to compare different plans. When calculating a plan's cost, the optimizer includes factors such as CPU and I/O operations required by that plan. To learn more about PostgreSQL query planner cost estimates, see Query Planning in the PostgreSQL documentation.

The following image shows how a plan is chosen for a given SQL statement when query plan management is active, and when it's not.

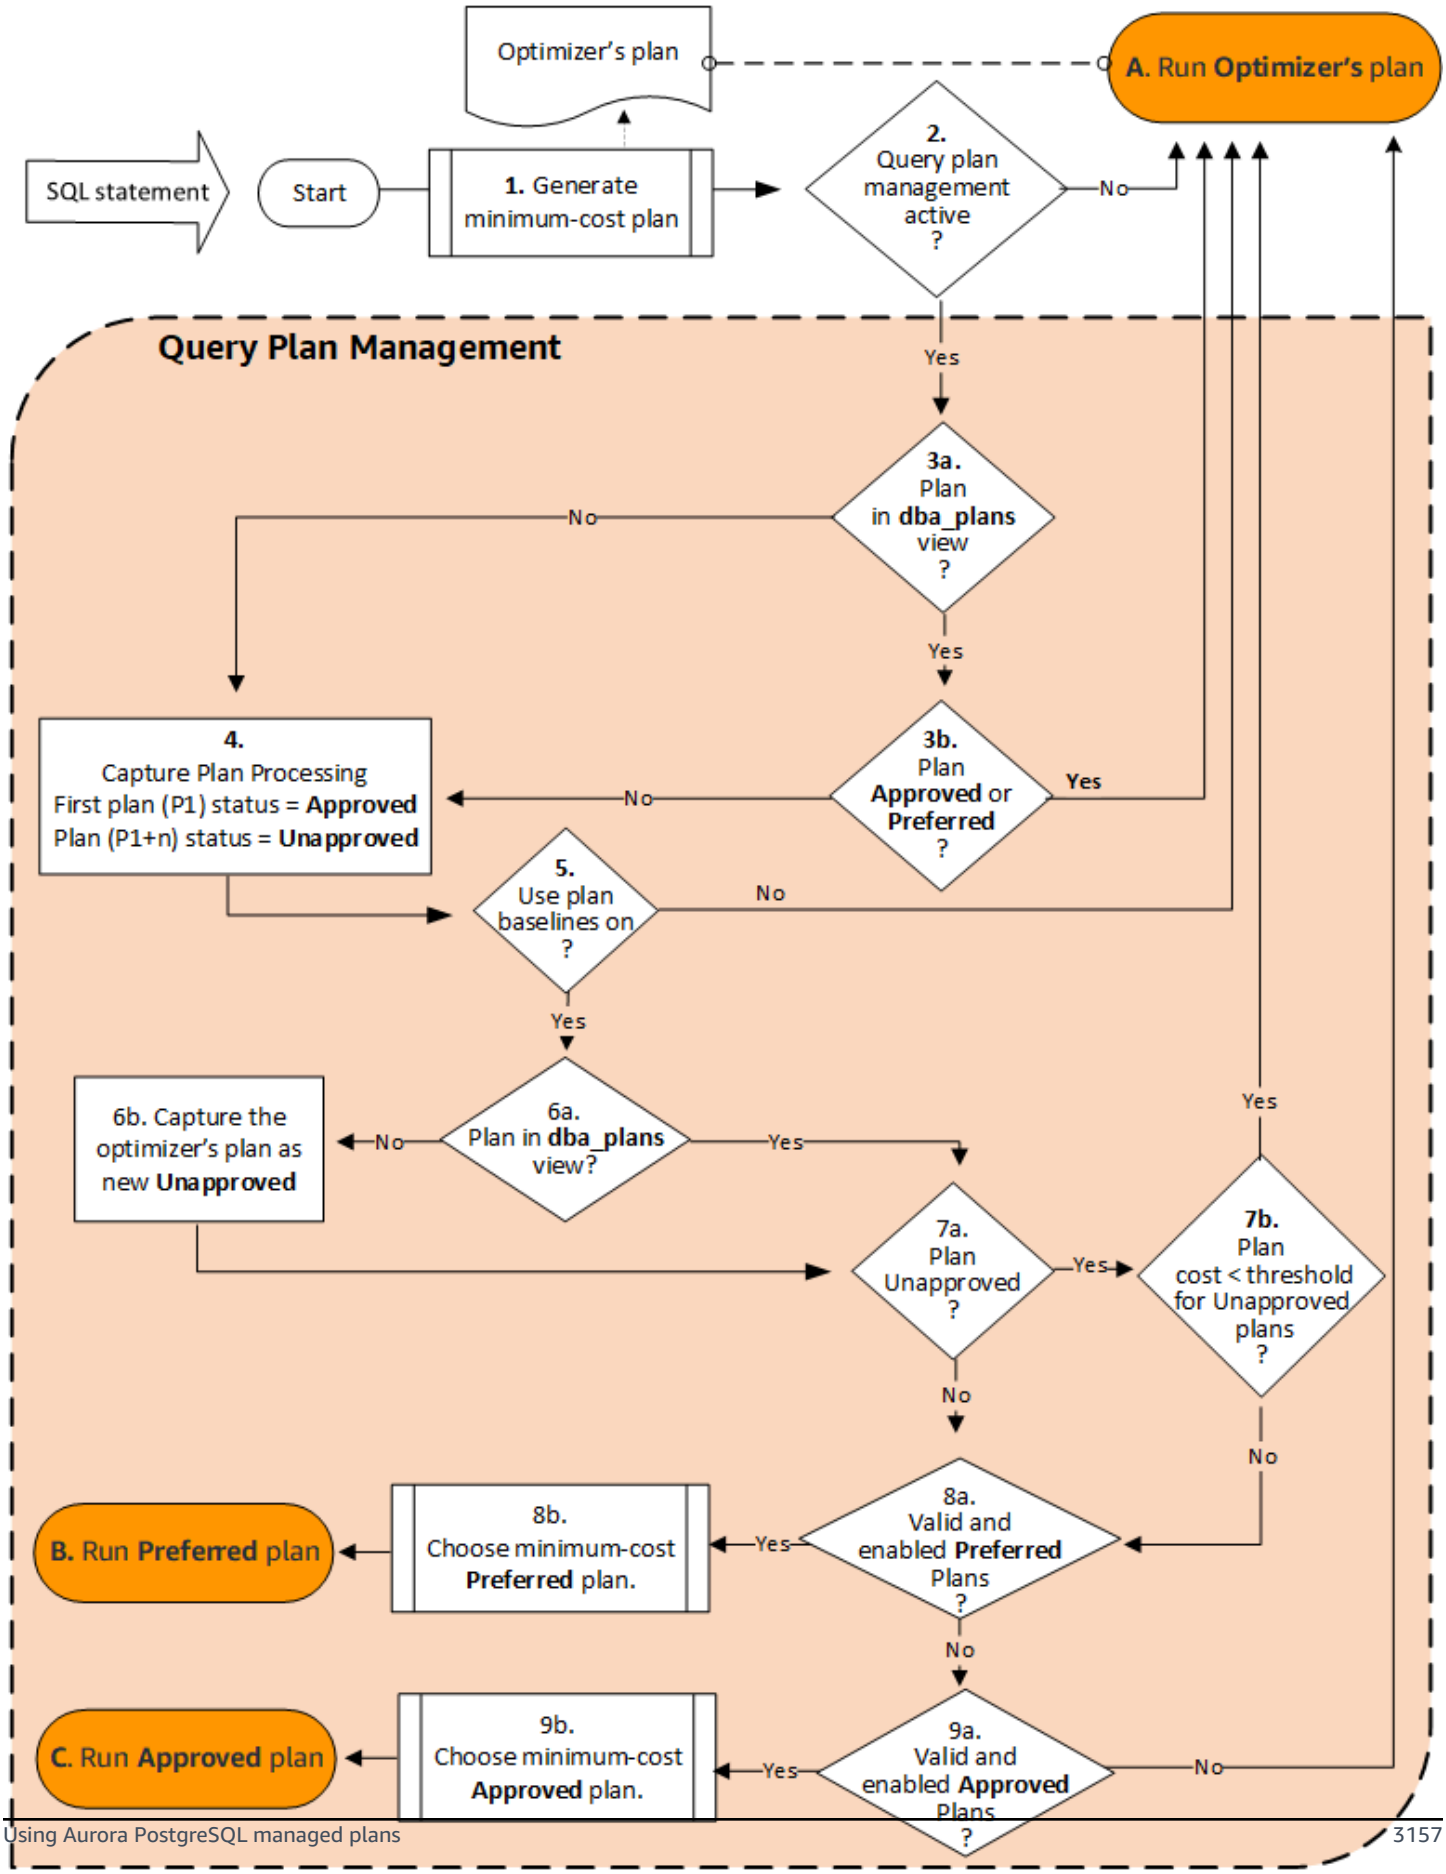
Optimizer's plan
A. Run Optimizer's plan
SQL statement
Start
1. Generate minimum-cost plan
2. Query plan management active ?
No
Query Plan Management
Yes
3a. Plan in dba_plans view ?
No
Yes
4. Capture Plan Processing
First plan (P1) status = Approved
Plan (P1+n) status = Unapproved
3b. Plan Approved or Preferred ?
No
Yes
5. Use plan baselines on ?
No
Yes
6a. Plan in dba_plans view?
No
6b. Capture the optimizer's plan as new Unapproved
Yes
7a. Plan Unapproved ?
Yes
7b. Plan cost < threshold for Unapproved plans ?
Yes
No
No
8a. Valid and enabled Preferred Plans ?
Yes
8b. Choose minimum-cost Preferred plan.
B. Run Preferred plan
No
9a. Valid and enabled Approved Plans ?
Yes
9b. Choose minimum-cost Approved plan.
C. Run Approved plan
No

The flow is as follows:

1. The optimizer generates a minimum-cost plan for the SQL statement.
2. If query plan management isn't active, the optimizer's plan is run immediately (A. Run Optimizer's plan). Query plan management is inactive when the `apg_plan_mgmt.capture_plan_baselines` and the `apg_plan_mgmt.use_plan_baselines` parameters are both at their default settings ("off" and "false," respectively).

   Otherwise, query plan management is active. In this case, the SQL statement and the optimizer's plan for it are further assessed before a plan is chosen.

   > **Tip**
   >
   > Database users with the `apg_plan_mgmt` role can pro-actively compare plans, change status of plans, and force the use of specific plans as needed. For more information, see Improving Aurora PostgreSQL query plans.

3. The SQL statement might already have plans that were stored by query plan management in the past. Plans are stored in the `apg_plan_mgmt.dba_plans`, along with information about the SQL statements that were used to create them. Information about a plan includes its status. A plan's status can determine whether it's used or not, as follows.

   a. If the plan isn't among the stored plans for the SQL statement, it means that it's the first time this particular plan was generated by the optimizer for the given SQL statement. The plan is sent to Capture Plan Processing (4).

   b. If the plan is among the stored plans and its status is Approved or Preferred, the plan is run (A. Run Optimizer's plan).

      If the plan is among the stored plans but it's neither Approved nor Preferred, the plan is sent to Capture Plan Processing (4).

4. When a plan is captured for the first time for a given SQL statement, the plan's status is always set to Approved (P1). If the optimizer subsequently generates the same plan for the same SQL statement, the status of that plan is changed to Unapproved (P1+n).

   With the plan captured and its status updated, the evaluation continues at the next step (5).

5. A plan's *baseline* consists of the history of the SQL statement and its plans at various states. Query plan management can take the baseline into account when choosing a plan, depending on whether the use plan baselines option is turned on or not, as follows.
   - Use plan baselines is "off" when the `apg_plan_mgmt.use_plan_baselines` parameter is set to its default value (`false`). The plan isn't compared to the baseline before it's run (A. Run Optimizer's plan).
   - Use plan baselines is "on" when the `apg_plan_mgmt.use_plan_baselines` parameter is set to `true`. The plan is further assessed using the baseline (6).
6. The plan is compared to other plans for the statement in the baseline.
   a. If the optimizer's plan is among the plans in the baseline, its status is checked (7a).
   b. If the optimizer's plan isn't among plans in the baseline, the plan is added to the plans for the statement as a new `Unapproved` plan.
7. The plan's status is checked to determine only if it's Unapproved.
   a. If the plan's status is Unapproved, the plan's estimated cost is compared to the cost estimate specified for the unapproved execution plan threshold.
      - If the plan's estimated cost is below the threshold, the optimizer uses it even though it's an Unapproved plan (A. Run Optimizer's plan). Generally, the optimizer won't run an Unapproved plan. However, when the `apg_plan_mgmt.unapproved_plan_execution_threshold` parameter specifies a cost threshold value, the optimizer compares the Unapproved plan's cost to the threshold. If the estimated cost is less than the threshold, the optimizer runs the plan. For more information, see apg_plan_mgmt.unapproved_plan_execution_threshold.
      - If the plan's estimated cost isn't below the threshold, the plan's other attributes are checked (8a).
   b. If the plan's status is anything other than Unapproved, its other attributes are checked (8a).
8. The optimizer won't use a plan that's disabled. That is, the plan that has its `enable` attribute set to 'f' (false). The optimizer also won't use a plan that has a status of Rejected.

   The optimizer can't use any plans that aren't valid. Plans can become invalid over time when the objects that they depend on, such as indexes and table partitions, are removed or deleted.

   a. If the statement has any enabled and valid Preferred plans, the optimizer chooses the minimum-cost plan from among the Preferred plans stored for this SQL statement. The optimizer then runs the minimum-cost Preferred plan.

b. If the statement doesn't have any enabled and valid Preferred plans, it's assessed in the next step (9).

9. If the statement has any enabled and valid Approved plans, the optimizer chooses the minimum-cost plan from among the Approved plans stored for this SQL statement. The optimizer then runs the minimum-cost Approved plan.

   If the statement doesn't have any valid and enabled Approved plans, the optimizer uses the minimum cost plan (A. Run Optimizer's plan).

Examining Aurora PostgreSQL query plans in the dba_plans view

Database users and administrators that have been granted the `apg_plan_mgmt` role can view and manage the plans stored in the `apg_plan_mgmt.dba_plans`. An Aurora PostgreSQL DB cluster's administrator (someone with `rds_superuser` permissions) must explicitly grant this role to the database users who need to work with query plan management.

The `apg_plan_mgmt` view contains the plan history for all managed SQL statements for every database on the writer instance of the Aurora PostgreSQL DB cluster. This view lets you examine plans, their state, when last used, and all other relevant details.

As discussed in Normalization and the SQL hash, each managed plan is identified by the combined SQL hash value and a plan hash value. With these identifiers, you can use tools such as Amazon RDS Performance Insights to track individual plan performance. For more information about Performance Insights, see Using Amazon RDS performance insights.

Listing managed plans

To list the managed plans, use a SELECT statement on the `apg_plan_mgmt.dba_plans` view. The following example displays some columns in the `dba_plans` view such as the `status`, which identifies the approved and unapproved plans.

```
SELECT sql_hash, plan_hash, status, enabled, stmt_name
FROM apg_plan_mgmt.dba_plans;

 sql_hash   | plan_hash |   status   | enabled | stmt_name
------------+-----------+------------+---------+------------
 1984047223 | 512153379 | Approved   | t       | rangequery
 1984047223 | 512284451 | Unapproved | t       | rangequery
 (2 rows)
```

For readability, the query and the output shown list just a few of the columns from the dba_plans view. For complete information, see Reference for the apg_plan_mgmt.dba_plans view for Aurora PostgreSQL-Compatible Edition.

Improving Aurora PostgreSQL query plans

Improve query plan management by evaluating plan performance and fixing plans. For more information about improving your query plans, see the following topics.

Topics

- Evaluating plan performance
- Fixing plans using pg_hint_plan

Evaluating plan performance

After the optimizer captures plans as unapproved, use the apg_plan_mgmt.evolve_plan_baselines function to compare plans based on their actual performance. Depending on the outcome of your performance experiments, you can change a plan's status from unapproved to either approved or rejected. You can instead decide to use the apg_plan_mgmt.evolve_plan_baselines function to temporarily disable a plan if it does not meet your requirements.

Approving better plans

The following example demonstrates how to change the status of managed plans to approved using the apg_plan_mgmt.evolve_plan_baselines function.

```
SELECT apg_plan_mgmt.evolve_plan_baselines (
   sql_hash,
   plan_hash,
   min_speedup_factor := 1.0,
   action := 'approve'
)
FROM apg_plan_mgmt.dba_plans WHERE status = 'Unapproved';
```

```
NOTICE:     rangequery (1,10000)
NOTICE:     Baseline   [ Planning time 0.761 ms, Execution time 13.261 ms]
NOTICE:     Baseline+1 [ Planning time 0.204 ms, Execution time 8.956 ms]
```

```
NOTICE:     Total time benefit: 4.862 ms, Execution time benefit: 4.305 ms
NOTICE:     Unapproved -> Approved
evolve_plan_baselines
----------------------
0
(1 row)
```

The output shows a performance report for the `rangequery` statement with parameter bindings of 1 and 10,000. The new unapproved plan (`Baseline+1`) is better than the best previously approved plan (`Baseline`). To confirm that the new plan is now `Approved`, check the `apg_plan_mgmt.dba_plans` view.

```
SELECT sql_hash, plan_hash, status, enabled, stmt_name
FROM apg_plan_mgmt.dba_plans;
```

```
sql_hash  | plan_hash |  status  | enabled | stmt_name
------------+-----------+----------+---------+------------
1984047223 | 512153379 | Approved | t       | rangequery
1984047223 | 512284451 | Approved | t       | rangequery
(2 rows)
```

The managed plan now includes two approved plans that are the statement's plan baseline. You can also call the `apg_plan_mgmt.set_plan_status` function to directly set a plan's status field to `'Approved'`, `'Rejected'`, `'Unapproved'`, or `'Preferred'`.

Rejecting or disabling slower plans

To reject or disable plans, pass `'reject'` or `'disable'` as the action parameter to the `apg_plan_mgmt.evolve_plan_baselines` function. This example disables any captured `Unapproved` plan that is slower by at least 10 percent than the best `Approved` plan for the statement.

```
SELECT apg_plan_mgmt.evolve_plan_baselines(
sql_hash,  -- The managed statement ID
plan_hash, -- The plan ID
1.1,       -- number of times faster the plan must be
'disable'  -- The action to take. This sets the enabled field to false.
)
FROM apg_plan_mgmt.dba_plans
WHERE status = 'Unapproved' AND   -- plan is Unapproved
```

```
origin = 'Automatic';       -- plan was auto-captured
```

You can also directly set a plan to rejected or disabled. To directly set a plan's enabled field to `true` or `false`, call the `apg_plan_mgmt.set_plan_enabled` function. To directly set a plan's status field to `'Approved'`, `'Rejected'`, `'Unapproved'`, or `'Preferred'`, call the `apg_plan_mgmt.set_plan_status` function.

To delete plans that aren't valid and that you expect to remain invalid, use the `apg_plan_mgmt.validate_plans` function. This function lets you delete or disable invalid plans. For more information, see Validating plans.

Fixing plans using pg_hint_plan

The query optimizer is well-designed to find an optimal plan for all statements, and in most cases the optimizer finds a good plan. However, occasionally you might know that a much better plan exists than that generated by the optimizer. Two recommended ways to get the optimizer to generate a desired plan include using the `pg_hint_plan` extension or setting Grand Unified Configuration (GUC) variables in PostgreSQL:

- `pg_hint_plan` extension – Specify a "hint" to modify how the planner works by using PostgreSQL's `pg_hint_plan` extension. To install and learn more about how to use the `pg_hint_plan` extension, see the pg_hint_plan documentation.
- GUC variables – Override one or more cost model parameters or other optimizer parameters, such as the `from_collapse_limit` or `GEQO_threshold`.

When you use one of these techniques to force the query optimizer to use a plan, you can also use query plan management to capture and enforce use of the new plan.

You can use the `pg_hint_plan` extension to change the join order, the join methods, or the access paths for a SQL statement. You use a SQL comment with special `pg_hint_plan` syntax to modify how the optimizer creates a plan. For example, assume the problem SQL statement has a two-way join.

```
SELECT *
FROM t1, t2
WHERE t1.id = t2.id;
```

Then suppose that the optimizer chooses the join order (t1, t2), but you know that the join order (t2, t1) is faster. The following hint forces the optimizer to use the faster join order, (t2, t1). Include

EXPLAIN so that the optimizer generates a plan for the SQL statement but without running the statement. (Output not shown.)

```
/*+ Leading ((t2 t1)) */ EXPLAIN SELECT *
FROM t1, t2
WHERE t1.id = t2.id;
```

The following steps show how to use `pg_hint_plan`.

To modify the optimizer's generated plan and capture the plan using pg_hint_plan

1. Turn on the manual capture mode.

   ```
   SET apg_plan_mgmt.capture_plan_baselines = manual;
   ```

2. Specify a hint for the SQL statement of interest.

   ```
   /*+ Leading ((t2 t1)) */ EXPLAIN SELECT *
   FROM t1, t2
   WHERE t1.id = t2.id;
   ```

   After this runs, the optimizer captures the plan in the `apg_plan_mgmt.dba_plans` view. The captured plan doesn't include the special `pg_hint_plan` comment syntax because query plan management normalizes the statement by removing leading comments.

3. View the managed plans by using the `apg_plan_mgmt.dba_plans` view.

   ```
   SELECT sql_hash, plan_hash, status, sql_text, plan_outline
   FROM apg_plan_mgmt.dba_plans;
   ```

4. Set the status of the plan to `Preferred`. Doing so makes sure that the optimizer chooses to run it, instead of selecting from the set of approved plans, when the minimum-cost plan isn't already `Approved` or `Preferred`.

   ```
   SELECT apg_plan_mgmt.set_plan_status(sql-hash, plan-hash, 'preferred' );
   ```

5. Turn off manual plan capture and enforce the use of managed plans.

   ```
   SET apg_plan_mgmt.capture_plan_baselines = false;
   SET apg_plan_mgmt.use_plan_baselines = true;
   ```

Now, when the original SQL statement runs, the optimizer chooses either an `Approved` or `Preferred` plan. If the minimum-cost plan isn't `Approved` or `Preferred`, then the optimizer chooses the `Preferred` plan.

Deleting Aurora PostgreSQL query plans

Delete execution plans that you aren't using or plans that aren't valid. For more information about deleting plans, see the following sections.

Topics

- Deleting plans
- Validating plans

Deleting plans

Plans are automatically deleted if they haven't been used in over a month, specifically, 32 days. That's the default setting for the `apg_plan_mgmt.plan_retention_period` parameter. You can change the plan retention period to a longer period of time, or to a shorter period of time starting from the value of 1. Determining the number of days since a plan was last used is calculated by subtracting the `last_used` date from the current date. The `last_used` date is the most recent date that the optimizer chose the plan as the minimum cost plan or that the plan was run. The date is stored for the plan in the `apg_plan_mgmt.dba_plans` view.

We recommend that you delete plans that haven't been used for a long time or that aren't useful. Every plan has a `last_used` date that the optimizer updates each time it executes a plan or chooses the plan as the minimum-cost plan for a statement. Check the last `last_used` dates to identify the plans that you can safely delete.

The following query returns a three column table with the count on the total number of plans, plans failed to delete, and the plans successfully deleted. It has a nested query that is an example of how to use the `apg_plan_mgmt.delete_plan` function to delete all plans that haven't been chosen as the minimum-cost plan in the last 31 days and its status is not `Rejected`.

```
SELECT (SELECT COUNT(*) from apg_plan_mgmt.dba_plans) total_plans,
       COUNT(*) FILTER (WHERE result = -1) failed_to_delete,
       COUNT(*) FILTER (WHERE result = 0) successfully_deleted
       FROM (
```

```
            SELECT apg_plan_mgmt.delete_plan(sql_hash, plan_hash) as result
            FROM apg_plan_mgmt.dba_plans
            WHERE last_used < (current_date - interval '31 days')
            AND status <> 'Rejected'
            ) as dba_plans ;
```

```
 total_plans | failed_to_delete | successfully_deleted
-------------+------------------+----------------------
           3 |                0 |                    2
```

For more information, see apg_plan_mgmt.delete_plan.

To delete plans that aren't valid and that you expect to remain invalid, use the `apg_plan_mgmt.validate_plans` function. This function lets you delete or disable invalid plans. For more information, see Validating plans.

Important

If you don't delete extraneous plans, you might eventually run out of shared memory that's set aside for query plan management. To control how much memory is available for managed plans, use the `apg_plan_mgmt.max_plans` parameter. Set this parameter in your custom DB parameter group and reboot your DB instance for changes to take effect. For more information, see the apg_plan_mgmt.max_plans parameter.

Validating plans

Use the `apg_plan_mgmt.validate_plans` function to delete or disable plans that are invalid.

Plans can become invalid or stale when objects that they depend on are removed, such as an index or a table. However, a plan might be invalid only temporarily if the removed object gets recreated. If an invalid plan can become valid later, you might prefer to disable an invalid plan or do nothing rather than delete it.

To find and delete all plans that are invalid and haven't been used in the past week, use the `apg_plan_mgmt.validate_plans` function as follows.

```
SELECT apg_plan_mgmt.validate_plans(sql_hash, plan_hash, 'delete')
FROM apg_plan_mgmt.dba_plans
```

```
WHERE last_used < (current_date - interval '7 days');
```

To enable or disabled a plan directly, use the `apg_plan_mgmt.set_plan_enabled` function.

Exporting and importing managed plans for Aurora PostgreSQL

You can export your managed plans and import them into another DB instance.

To export managed plans

An authorized user can copy any subset of the `apg_plan_mgmt.plans` table to another table, and then save it using the pg_dump command. The following is an example.

```
CREATE TABLE plans_copy AS SELECT *
FROM apg_plan_mgmt.plans [ WHERE predicates ] ;
```

```
% pg_dump --table apg_plan_mgmt.plans_copy -Ft mysourcedatabase > plans_copy.tar
```

```
DROP TABLE apg_plan_mgmt.plans_copy;
```

To import managed plans

1. Copy the .tar file of the exported managed plans to the system where the plans are to be restored.
2. Use the `pg_restore` command to copy the tar file into a new table.

   ```
   % pg_restore --dbname mytargetdatabase -Ft plans_copy.tar
   ```
3. Merge the `plans_copy` table with the `apg_plan_mgmt.plans` table, as shown in the following example.

   > **Note**
   >
   > In some cases, you might dump from one version of the `apg_plan_mgmt` extension and restore into a different version. In these cases, the columns in the plans table might be different. If so, name the columns explicitly instead of using SELECT *.

   ```
   INSERT INTO apg_plan_mgmt.plans SELECT * FROM plans_copy
   ```

```
ON CONFLICT ON CONSTRAINT plans_pkey
DO UPDATE SET
status = EXCLUDED.status,
enabled = EXCLUDED.enabled,
-- Save the most recent last_used date
--
last_used = CASE WHEN EXCLUDED.last_used > plans.last_used
THEN EXCLUDED.last_used ELSE plans.last_used END,
-- Save statistics gathered by evolve_plan_baselines, if it ran:
--
estimated_startup_cost = EXCLUDED.estimated_startup_cost,
estimated_total_cost = EXCLUDED.estimated_total_cost,
planning_time_ms = EXCLUDED.planning_time_ms,
execution_time_ms = EXCLUDED.execution_time_ms,
total_time_benefit_ms = EXCLUDED.total_time_benefit_ms,
execution_time_benefit_ms = EXCLUDED.execution_time_benefit_ms;
```

4. Reload the managed plans into shared memory and remove the temporary plans table.

```
SELECT apg_plan_mgmt.reload(); -- refresh shared memory
DROP TABLE plans_copy;
```

Parameter reference for Aurora PostgreSQL query plan management

You can set your preferences for the `apg_plan_mgmt` extension by using the parameters listed in this section. These are available in the custom DB cluster parameter and the DB parameter group associated with your Aurora PostgreSQL DB cluster. These parameters control the behavior of the query plan management feature and how it affects the optimizer. For information about setting up query plan management, see Turning on Aurora PostgreSQL query plan management. Changing the parameters following has no effect if the `apg_plan_mgmt` extension isn't set up as detailed in that section. For information about modifying parameters, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora and DB parameter groups for Amazon Aurora DB instances.

Parameters

- apg_plan_mgmt.capture_plan_baselines
- apg_plan_mgmt.plan_capture_threshold
- apg_plan_mgmt.explain_hashes
- apg_plan_mgmt.log_plan_enforcement_result

- apg_plan_mgmt.max_databases
- apg_plan_mgmt.max_plans
- apg_plan_mgmt.plan_hash_version
- apg_plan_mgmt.plan_retention_period
- apg_plan_mgmt.unapproved_plan_execution_threshold
- apg_plan_mgmt.use_plan_baselines
- auto_explain.hashes

apg_plan_mgmt.capture_plan_baselines

Captures query execution plans generated by the optimizer for each SQL statement and stores them in the `dba_plans` view. By default, the maximum number of plans that can be stored is 10,000 as specified by the `apg_plan_mgmt.max_plans` parameter. For reference information, see apg_plan_mgmt.max_plans.

You can set this parameter in the custom DB cluster parameter group or in the custom DB parameter group. Changing the value of this parameter doesn't require a reboot.

Default	Allowed values	Description
off	automatic	Apply this setting at either the session level or in a parameter group to capture plans that are used two or more times.
	manual	Apply this setting at either the session level or in a parameter group to capture plans that are used one or more times.
	off	Turns off plan capture.

For more information, see Capturing Aurora PostgreSQL execution plans.

apg_plan_mgmt.plan_capture_threshold

Specifies a threshold so that if the total cost of the query execution plan is below the threshold, the plan won't be captured in the `apg_plan_mgmt.dba_plans` view.

Changing the value of this parameter doesn't require a reboot.

Default	Allowed values	Description
0	0 - 1.79769e+308	Sets the threshold of the `apg_plan_mgmt` query plan total execution cost for capturing plans.

For more information, see Examining Aurora PostgreSQL query plans in the dba_plans view.

apg_plan_mgmt.explain_hashes

Specifies if the `EXPLAIN [ANALYZE]` shows `sql_hash` and `plan_hash` at the end of its output. Changing the value of this parameter doesn't require a reboot.

Default	Allowed values	Description
0	0 (off)	EXPLAIN does not show sql_hash and plan_hash without hashes true option.
	1 (on)	EXPLAIN shows sql_hash and plan_hash without hashes true option.

apg_plan_mgmt.log_plan_enforcement_result

Specifies if the results has to be recorded to see if the QPM managed plans are used properly. When a stored generic plan is used, there will be no records written in the log files. Changing the value of this parameter doesn't require a reboot.

Default	Allowed values	Description
none	none	Does not show any plan enforcement result in log files.
	on_error	Only shows plan enforcement result in log files when QPM fails to use managed plans.
	all	Shows all plan enforcement results in log files including both successes and failures.

apg_plan_mgmt.max_databases

Specifies the maximum number of databases on your Aurora PostgreSQL DB cluster's Writer instance that can use query plan management. By default, up to 10 databases can use query plan management. If you have more than 10 databases on the instance, you can change the value of this setting. To find out how many databases are on a given instance, connect to the instance using `psql`. Then, use the psql metacommand, `\l`, to list the databases.

Changing the value of this parameter requires that you reboot the instance for the setting to take effect.

Default	Allowed values	Description
10	10-2147483647	Maximum number of databases that can use query plan management on the instance.

You can set this parameter in the custom DB cluster parameter group or in the custom DB parameter group.

apg_plan_mgmt.max_plans

Sets the maximum number of SQL statements that the query plan manager can maintain in the `apg_plan_mgmt.dba_plans` view. We recommend setting this parameter to `10000` or higher for all Aurora PostgreSQL versions.

You can set this parameter in the custom DB cluster parameter group or in the custom DB parameter group. Changing the value of this parameter requires that you reboot the instance for the setting to take effect.

Default	Allowed values	Description
10000	10-2147483647	Maximum number of plans that can be stored in the `apg_plan_mgmt.dba_plans` view. Default for Aurora PostgreSQL version 10 and older versions is 1000.

For more information, see Examining Aurora PostgreSQL query plans in the dba_plans view.

apg_plan_mgmt.plan_hash_version

Specifies the use cases that the plan_hash calculation is designed to cover. A higher version of `apg_plan_mgmt.plan_hash_version` covers all the functionality of the lower version. For example, version 3 covers the use cases supported by version 2.

Changing the value of this parameter must be followed by a call to `apg_plan_mgmt.validate_plans('update_plan_hash')`. It updates the plan_hash values in each database with apg_plan_mgmt installed and entries in the plans table. For more information, see Validating plans

Default	Allowed values	Description
1	1	Default plan_hash calculation.
	2	plan_hash calculation modified for multi-schema support.
	3	plan_hash calculation modified for multi-schema support and partitioned table support.
	4	plan_hash calculation modified for parallel operators and to support materialize nodes.

apg_plan_mgmt.plan_retention_period

Specifies the number of days to keep plans in the `apg_plan_mgmt.dba_plans` view, after which they're automatically deleted. By default, a plan is deleted when 32 days have elapsed since the plan was last used (the `last_used` column in the `apg_plan_mgmt.dba_plans` view). You can change this setting to any number, 1 and over.

Changing the value of this parameter requires that you reboot the instance for the setting to take effect.

Default	Allowed values	Description
32	1-2147483647	Maximum number of days since a plan was last used before it's deleted.

For more information, see Examining Aurora PostgreSQL query plans in the dba_plans view.

apg_plan_mgmt.unapproved_plan_execution_threshold

Specifies a cost threshold below which an Unapproved plan can be used by the optimizer. By default the threshold is 0, so the optimizer doesn't run Unapproved plans. Setting this parameter to a trivially low cost threshold such as 100 avoids plan enforcement overhead on trivial plans. You can also set this parameter to an extremely large value like 10000000 using the reactive style of plan management. This allows the optimizer to use all chosen plans with no plan enforcement overhead. But, when a bad plan is found, you can manually mark it as "rejected" so that it is not used next time.

The value of this parameter represents a cost estimate for running a given plan. If an Unapproved plan is below that estimated cost, the optimizer uses it for the SQL statement. You can see captured plans and their status (Approved, Unapproved) in the `dba_plans` view. To learn more, see Examining Aurora PostgreSQL query plans in the dba_plans view.

Changing the value of this parameter doesn't require a reboot.

Default	Allowed values	Description
0	0-2147483647	Estimated plan cost below which an Unapproved plan is used.

For more information, see Using Aurora PostgreSQL managed plans.

apg_plan_mgmt.use_plan_baselines

Specifies that the optimizer should use one of the Approved plans captured and stored in the `apg_plan_mgmt.dba_plans` view. By default, this parameter is off (false), causing the optimizer to use the minimum-cost plan that it generates without any further assessment. Turning this parameter on (setting it to true) forces the optimizer to choose a query execution plan for the statement from its plan baseline. For more information, see Using Aurora PostgreSQL managed plans. To find an image detailing this process, see How the optimizer chooses which plan to run.

You can set this parameter in the custom DB cluster parameter group or in the custom DB parameter group. Changing the value of this parameter doesn't require a reboot.

Default	Allowed values	Description
false	true	Use an Approved, Preferred, or Unapproved plan from the `apg_plan_mgmt.dba_plans` . If none of those meet all evaluation criterion for the optimizer, it can then use its own generated minimum-cost plan. For more information, see How the optimizer chooses which plan to run.
	false	Use the minimum cost plan generated by the optimizer.

You can evaluate response times of different captured plans and change plan status, as needed. For more information, see Improving Aurora PostgreSQL query plans.

auto_explain.hashes

Specifies if the auto_explain output shows sql_hash and plan_hash. Changing the value of this parameter doesn't require a reboot.

Default	Allowed values	Description
0(off)	0(off)	`auto_explain` result does not show `sql_hash` and `plan_hash` .
	1(on)	`auto_explain` result shows `sql_hash` and `plan_hash` .

Function reference for Aurora PostgreSQL query plan management

The `apg_plan_mgmt` extension provides the following functions.

Functions

- apg_plan_mgmt.copy_outline
- apg_plan_mgmt.delete_plan
- apg_plan_mgmt.evolve_plan_baselines
- apg_plan_mgmt.get_explain_plan
- apg_plan_mgmt.plan_last_used

- apg_plan_mgmt.reload
- apg_plan_mgmt.set_plan_enabled
- apg_plan_mgmt.set_plan_status
- apg_plan_mgmt.update_plans_last_used
- apg_plan_mgmt.validate_plans

apg_plan_mgmt.copy_outline

Copy a given SQL plan hash and plan outline to a target SQL plan hash and outline, thereby overwriting the target's plan hash and outline. This function is available in `apg_plan_mgmt` 2.3 and higher releases.

Syntax

```
apg_plan_mgmt.copy_outline(
    source_sql_hash,
    source_plan_hash,
    target_sql_hash,
    target_plan_hash,
    force_update_target_plan_hash
)
```

Return value

Returns 0 when the copy is successful. Raises exceptions for invalid inputs.

Parameters

Parameter	Description
`source_sql_hash`	The `sql_hash` ID associated with the `plan_hash` to copy to the target query.
`source_plan_hash`	The `plan_hash` ID to copy to the target query.
`target_sql_hash`	The `sql_hash` ID of the query to update with the source plan hash and outline.

Parameter	Description
target_plan_hash	The plan_hash ID of the query to update with the source plan hash and outline.
force_update_target_plan_hash	(Optional) The target_plan_hash ID of the query is updated even if the source plan isn't reproducible for the target_sql_hash . When set to true, the function can be used to copy plans across schemas where relation names and columns are consistent.

Usage notes

This function allows you to copy a plan hash and plan outline that uses hints to other, similar statements, and thus saves you from needing to use in-line hint statements at every occurrence in the target statements. If the updated target query results in an invalid plan, this function raises an error and rolls back the attempted update.

apg_plan_mgmt.delete_plan

Delete a managed plan.

Syntax

```
apg_plan_mgmt.delete_plan(
    sql_hash,
    plan_hash
)
```

Return value

Returns 0 if the delete was successful or -1 if the delete failed.

Parameters

Parameter	Description
sql_hash	The sql_hash ID of the plan's managed SQL statement.
plan_hash	The managed plan's plan_hash ID.

apg_plan_mgmt.evolve_plan_baselines

Executes the captured query and compares its performance against the best approved/preferred plan that is enabled, or the optimizer's plan. Based on the results, applies a user input action.

Syntax

```
apg_plan_mgmt.evolve_plan_baselines(
    sql_hash,
    plan_hash,
    min_speedup_factor,
    action
)
```

Return value

The number of plans that were not faster than the best approved plan.

Parameters

Parameter	Description
sql_hash	The sql_hash ID of the plan's managed SQL statement.
plan_hash	The managed plan's plan_hash ID. Use NULL to mean all plans that have the same sql_hash ID value.
min_speed up_factor	The *minimum speedup factor* can be the number of times faster that a plan must be than the best of the already approved plans to approve it. Alternatively, this factor can be the number of times slower that a plan must be to reject or disable it.

Parameter	Description
	This is a positive float value.
`action`	The action the function is to perform. Valid values include the following . Case does not matter. • `'disable'` – Disable each matching plan that does not meet the minimum speedup factor. • `'approve'` – Enable each matching plan that meets the minimum speedup factor and set its status to `approved`. • `'reject'` – For each matching plan that does not meet the minimum speedup factor, set its status to `rejected`. • NULL – The function simply returns the number of plans that have no performance benefit because they do not meet the minimum speedup factor.

Usage notes

Set specified plans to approved, rejected, or disabled based on whether the planning plus execution time is faster than the best approved plan by a factor that you can set. The action parameter might be set to `'approve'` or `'reject'` to automatically approve or reject a plan that meets the performance criteria. Alternatively, it might be set to '' (empty string) to do the performance experiment and produce a report, but take no action.

To collect planning and execution time, `apg_plan_mgmt.evolve_plan_baselines()` runs `EXPLAIN ANALYZE` on the captured query. The captured query is executed with the privileges of the user who calls `apg_plan_mgmt.evolve_plan_baselines()`.

You can avoid pointlessly rerunning of the `apg_plan_mgmt.evolve_plan_baselines` function for a plan on which it was recently run. To do so, restrict the plans to just the recently created unapproved plans. Alternatively, you can avoid running the `apg_plan_mgmt.evolve_plan_baselines` function on any approved plan that has a recent `last_verified` timestamp.

Conduct a performance experiment by executing the captured query to compare the planning plus execution time of each plan relative to the other plans in the baseline. In some cases, there is

only one plan for a statement and the plan is approved. In such a case, compare the planning plus execution time of the plan to the planning plus execution time of using no plan.

The incremental benefit (or disadvantage) of each plan is recorded in the `apg_plan_mgmt.dba_plans` view in the `total_time_benefit_ms` column. When this value is positive, there is a measurable performance advantage to including this plan in the baseline.

In addition to collecting the planning and execution time of each candidate plan, the `last_verified` column of the `apg_plan_mgmt.dba_plans` view is updated with the `current_timestamp`. The `last_verified` timestamp might be used to avoid running this function again on a plan that recently had its performance verified.

apg_plan_mgmt.get_explain_plan

Generates the text of an `EXPLAIN` statement for the specified SQL statement.

Syntax

```
apg_plan_mgmt.get_explain_plan(
    sql_hash,
    plan_hash,
    [explainOptionList]
)
```

Return value

Returns runtime statistics for the specified SQL statements. Use without `explainOptionList` to return a simple `EXPLAIN` plan.

Parameters

Parameter	Description
`sql_hash`	The `sql_hash` ID of the plan's managed SQL statement.
`plan_hash`	The managed plan's `plan_hash` ID.
`explainOptionList`	A comma-separated list of explain options. Valid values include `'analyze'` , `'verbose'`

Parameter	Description
	, 'buffers' , 'hashes', and 'format json'. If the explainOptionList is NULL or an empty string (''), this function generates an EXPLAIN statement, without any statistics.

Usage notes

For the explainOptionList, you can use any of the same options that you would use with an EXPLAIN statement. The Aurora PostgreSQL optimizer concatenates the list of options that you provide to the EXPLAIN statement.

apg_plan_mgmt.plan_last_used

Returns the last_used date of the specified plan from shared memory.

> **Note**
>
> The value in shared memory is always current on the primary DB instance in the DB cluster. The value is only periodically flushed to the last_used column of the apg_plan_mgmt.dba_plans view.

Syntax

```
apg_plan_mgmt.plan_last_used(
    sql_hash,
    plan_hash
)
```

Return value

Returns the last_used date.

Parameters

Parameter	Description
sql_hash	The sql_hash ID of the plan's managed SQL statement.
plan_hash	The managed plan's plan_hash ID.

apg_plan_mgmt.reload

Reload plans into shared memory from the apg_plan_mgmt.dba_plans view.

Syntax

```
apg_plan_mgmt.reload()
```

Return value

None.

Parameters

None.

Usage notes

Call reload for the following situations:

- Use it to refresh the shared memory of a read-only replica immediately, rather than wait for new plans to propagate to the replica.
- Use it after importing managed plans.

apg_plan_mgmt.set_plan_enabled

Enable or disable a managed plan.

Syntax

```
apg_plan_mgmt.set_plan_enabled(
    sql_hash,
    plan_hash,
    [true | false]
)
```

Return value

Returns 0 if the setting was successful or -1 if the setting failed.

Parameters

Parameter	Description
`sql_hash`	The `sql_hash` ID of the plan's managed SQL statement.
`plan_hash`	The managed plan's `plan_hash` ID.
`enabled`	Boolean value of true or false: • A value of `true` enables the plan. • A value of `false` disables the plan.

apg_plan_mgmt.set_plan_status

Set a managed plan's status to `Approved`, `Unapproved`, `Rejected`, or `Preferred`.

Syntax

```
apg_plan_mgmt.set_plan_status(
    sql_hash,
    plan_hash,
    status
)
```

Return value

Returns 0 if the setting was successful or -1 if the setting failed.

Parameters

Parameter	Description
`sql_hash`	The `sql_hash` ID of the plan's managed SQL statement.
`plan_hash`	The managed plan's `plan_hash` ID.
`status`	A string with one of the following values: • `'Approved'` • `'Unapproved'` • `'Rejected'` • `'Preferred'` The case you use does not matter, however the status value is set to initial uppercase in the `apg_plan_mgmt.dba_plans` view. For more information about these values, see `status` in Reference for the apg_plan_mgmt.dba_plans view for Aurora PostgreSQL-Compatible Edition.

apg_plan_mgmt.update_plans_last_used

Immediately updates the plans table with the `last_used` date stored in shared memory.

Syntax

```
apg_plan_mgmt.update_plans_last_used()
```

Return value

None.

Parameters

None.

Usage notes

Call update_plans_last_used to make sure queries against the dba_plans.last_used column use the most current information. If the last_used date isn't updated immediately, a background process updates the plans table with the last_used date once every hour (by default).

For example, if a statement with a certain sql_hash begins to run slowly, you can determine which plans for that statement were executed since the performance regression began. To do that, first flush the data in shared memory to disk so that the last_used dates are current, and then query for all plans of the sql_hash of the statement with the performance regression. In the query, make sure the last_used date is greater than or equal to the date on which the performance regression began. The query identifies the plan or set of plans that might be responsible for the performance regression. You can use apg_plan_mgmt.get_explain_plan with explainOptionList set to verbose, hashes. You can also use apg_plan_mgmt.evolve_plan_baselines to analyze the plan and any alternative plans that might perform better.

The update_plans_last_used function has an effect only on the primary DB instance of the DB cluster.

apg_plan_mgmt.validate_plans

Validate that the optimizer can still recreate plans. The optimizer validates Approved, Unapproved, and Preferred plans, whether the plan is enabled or disabled. Rejected plans are not validated. Optionally, you can use the apg_plan_mgmt.validate_plans function to delete or disable invalid plans.

Syntax

```
apg_plan_mgmt.validate_plans(
    sql_hash,
    plan_hash,
    action)

apg_plan_mgmt.validate_plans(
    action)
```

Return value

The number of invalid plans.

Parameters

Parameter	Description
sql_hash	The sql_hash ID of the plan's managed SQL statement.
plan_hash	The managed plan's plan_hash ID. Use NULL to mean all plans for the same sql_hash ID value.
action	The action the function is to perform for invalid plans. Valid string values include the following. Case does not matter. • 'disable' – Each invalid plan is disabled. • 'delete' – Each invalid plan is deleted. • 'update_plan_hash' – Updates the plan_hash ID for plans that can't be reproduced exactly. It also allows you to fix a plan by rewriting the SQL. You can then register the good plan as an Approved plan for the original SQL. • NULL – The function simply returns the number of invalid plans. No other action is performed. • '' – An empty string produces a message indicating the number of both valid and invalid plans. Any other value is treated like the empty string.

Usage notes

Use the form validate_plans(action) to validate all the managed plans for all the managed statements in the entire apg_plan_mgmt.dba_plans view.

Use the form validate_plans(sql_hash, plan_hash, action) to validate a managed plan specified with plan_hash, for a managed statement specified with sql_hash.

Use the form validate_plans(sql_hash, NULL, action) to validate all the managed plans for the managed statement specified with sql_hash.

Reference for the apg_plan_mgmt.dba_plans view for Aurora PostgreSQL-Compatible Edition

The columns of plan information in the apg_plan_mgmt.dba_plans view include the following.

dba_plans column	Description
cardinality_error	A measure of the error between the estimated cardinality versus the actual cardinality. *Cardinality* is the number of table rows that the plan is to process. If the cardinality error is large, then it increases the likelihood that the plan isn't optimal. This column is populated by the apg_plan_mgmt.evolve_plan_baselines function.
compatibility_level	This parameter shows when a query plan was last validated. In Aurora PostgreSQL versions 12.19, 13.15, 14.12, 15.7, 16.3, and later, it displays the Aurora version number. For earlier versions, it displays a feature specific version number. **Note** Keep this parameter value at its default setting. Aurora PostgreSQL automatically sets and updates this value.
created_by	The authenticated user (session_user) who created the plan.
enabled	An indicator of whether the plan is enabled or disabled. All plans are enabled by default. You can disable plans to prevent them from being used by the optimizer. To modify this value, use the apg_plan_mgmt.set_plan_enabled function.
environment_variables	The PostgreSQL Grand Unified Configuration (GUC) parameters and values that the optimizer has overridden at the time the plan was captured.
estimated_startup_cost	The estimated optimizer setup cost before the optimizer delivers rows of a table.
estimated_total_cost	The estimated optimizer cost to deliver the final table row.

dba_plans column	Description
execution_time_benefit_ms	The execution time benefit in milliseconds of enabling the plan. This column is populated by the apg_plan_mgmt.evolve_plan_baselines function.
execution_time_ms	The estimated time in milliseconds that the plan would run. This column is populated by the apg_plan_mgmt.evolve_plan_baselines function.
has_side_effects	A value that indicates that the SQL statement is a data manipulation language (DML) statement or a SELECT statement that contains a VOLATILE function.
last_used	This value is updated to the current date whenever the plan is either executed or when the plan is the query optimizer's minimum-cost plan. This value is stored in shared memory and periodically flushed to disk. To get the most up-to-date value, read the date from shared memory by calling the function `apg_plan_mgmt.plan_last_used(sql_hash, plan_hash)` instead of reading the `last_used` value. For additional information, see the apg_plan_mgmt.plan_retention_period parameter.
last_validated	The most recent date and time when it was verified that the plan could be recreated by either the apg_plan_mgmt.validate_plans function or the apg_plan_mgmt.evolve_plan_baselines function.
last_verified	The most recent date and time when a plan was verified to be the best-performing plan for the specified parameters by the apg_plan_mgmt.evolve_plan_baselines function.

dba_plans column	Description
origin	How the plan was captured with the apg_plan_mgmt.capture_plan_baselines parameter. Valid values include the following: M – The plan was captured with manual plan capture. A – The plan was captured with automatic plan capture.
param_list	The parameter values that were passed to the statement if this is a prepared statement.
plan_created	The date and time the plan that was created.
plan_hash	The plan identifier. The combination of plan_hash and sql_hash uniquely identifies a specific plan.
plan_outline	A representation of the plan that is used to recreate the actual execution plan, and that is database-independent. Operators in the tree correspond to operators that appear in the EXPLAIN output.
planning_time_ms	The actual time to run the planner, in milliseconds. This column is populated by the apg_plan_mgmt.evolve_plan_baselines function.
queryId	A statement hash, as calculated by the pg_stat_statements extension. This isn't a stable or database-independent identifier because it depends on object identifiers (OIDs). The value will be 0 if compute_query_id is off when capturing the query plan.
sql_hash	A hash value of the SQL statement text, normalized with literals removed.
sql_text	The full text of the SQL statement.

dba_plans column	Description
status	A plan's status, which determines how the optimizer uses a plan. Valid values include the following. • Approved – A usable plan that the optimizer can choose to run. The optimizer runs the least-cost plan from a managed statement's set of approved plans (baseline). To reset a plan to approved, use the apg_plan_mgmt.evolve_plan_baselines function. • Unapproved – A captured plan that you have not verified for use. For more information, see Evaluating plan performance. • Rejected – A plan that the optimizer won't use. For more information, see Rejecting or disabling slower plans. • Preferred – A plan that you have determined is a preferred plan to use for a managed statement. If the optimizer's minimum-cost plan isn't an approved or preferred plan, you can reduce plan enforcement overhead. To do so, make a subset of the approved plans Preferred . When the optimizer's minimum cost isn't an Approved plan, a Preferred plan is chosen before an Approved plan. To reset a plan to Preferred , use the apg_plan_mgmt.set_plan_status function.
stmt_name	The name of the SQL statement within a PREPARE statement . This value is an empty string for an unnamed prepared statement. This value is NULL for a nonprepared statement.
total_time_benefit_ms	The total time benefit in milliseconds of enabling this plan. This value considers both planning time and execution time. If this value is negative, there is a disadvantage to enabling this plan. This column is populated by the apg_plan_mgmt.evolve_plan_baselines function.

Advanced features in Query Plan Management

Following you can find information about the advanced Aurora PostgreSQL Query Plan Management (QPM) features:

Topics

- Capturing Aurora PostgreSQL execution plans in Replicas
- Supporting table partition

Capturing Aurora PostgreSQL execution plans in Replicas

QPM (Query Plan Management) allows you to capture the query plans generated by Aurora Replicas and stores them on the primary DB instance of the Aurora DB cluster. You can collect the query plans from all the Aurora Replicas, and maintain a set of optimal plans in a central persistent table on the primary instance. You can then apply these plans on other Replicas when needed. This helps you to maintain the stability of execution plans and improve performance of the queries across the DB clusters and engine versions.

Topics

- Prerequisites
- Managing plan capture for Aurora Replicas
- Troubleshooting

Prerequisites

Turn on `capture_plan_baselines parameter` in Aurora Replica - Set `capture_plan_baselines` parameter to automatic or manual to capture plans in Aurora Replicas. For more information, see apg_plan_mgmt.capture_plan_baselines.

Install postgres_fdw extension - You must install `postgres_fdw` foreign data wrapper extension to capture plans in Aurora Replicas. Run the following command in each database, to install the extension.

```
postgres=> CREATE EXTENSION IF NOT EXISTS postgres_fdw;
```

Managing plan capture for Aurora Replicas

Turn on plan capture for Aurora Replicas

You must have `rds_superuser` privileges to create or remove Plan Capture in Aurora Replicas. For more information on user roles and permissions, see Understanding PostgreSQL roles and permissions.

To capture plans, call the function apg_plan_mgmt.create_replica_plan_capture in the writer DB instance, as shown in the following:

```
postgres=> CALL apg_plan_mgmt.create_replica_plan_capture('endpoint', 'password');
```

- endpoint - Aurora Global Database writer endpoint or cluster_endpoint provides failover support for Plan Capture in Aurora Replicas.

  For more information on the Aurora Global Database writer endpoint, see Viewing the endpoints of an Amazon Aurora global database.

  For more information about cluster endpoints, see Cluster endpoints for Amazon Aurora.
- password - We recommend you to follow the below guidelines while creating the password to enhance the security:
  - It must contain at least 8 characters.
  - It must contain at least one uppercase, one lowercase letter, and one number.
  - It must have at least one special character (?, !, #, <, >, *, and so on).

> **Note**
>
> If you change the endpoint, password, or port number, you must run `apg_plan_mgmt.create_replica_plan_capture()` again with the endpoint and password to re-initialize the plan capture. If not, capturing plans from Aurora Replicas will fail.

Turn off plan capture for Aurora Replicas

You can turn off `capture_plan_baselines` parameter in Aurora Replica by setting its value to `off` in the Parameter group.

Remove plan capture for Aurora Replicas

You can completely remove Plan Capture in Aurora Replicas but make sure before you do. To remove plan capture, call `apg_plan_mgmt.remove_replica_plan_capture` as shown:

```
postgres=> CALL apg_plan_mgmt.remove_replica_plan_capture();
```

You must call apg_plan_mgmt.create_replica_plan_capture() again to turn on plan capture in Aurora Replicas with the endpoint and password.

Troubleshooting

Following, you can find troubleshooting ideas and workarounds if the plan is not captured in Aurora Replicas as expected.

- **Parameter settings** - Check if the `capture_plan_baselines` parameter is set to proper value to turn on plan capture.
- **`postgres_fdw` extension is installed** - Use the following query to check if `postgres_fdw` is installed.

  ```
  postgres=> SELECT * FROM pg_extension WHERE extname = 'postgres_fdw'
  ```

- **create_replica_plan_capture() is called** - Use the following command to check if the user mapping exits. Otherwise, call `create_replica_plan_capture()` to initialize the feature.

  ```
  postgres=> SELECT * FROM pg_foreign_server WHERE srvname =
   'apg_plan_mgmt_writer_foreign_server';
  ```

- **Endpoint and port number** - Check if the endpoint and port number are appropriate. There won't be any error message displayed if these values are incorrect.

  Use the following command to verify if the endpoint used in the create() and to check which database it resides in:

  ```
  postgres=> SELECT srvoptions FROM pg_foreign_server WHERE srvname =
   'apg_plan_mgmt_writer_foreign_server';
  ```

- **reload()** - You must call apg_plan_mgmt.reload() after calling apg_plan_mgmt.delete_plan() in Aurora Replicas to make the delete function effective. This ensures that the change has been successfully implemented.

- **Password** - You must enter password in create_replica_plan_capture() as per the guidelines mentioned. Otherwise, you will receive an error message. For more information,see Managing plan capture for Aurora Replicas. Use another password that aligns with the requirements.
- **Cross-Region connection** - Plan capture in Aurora Replicas is also supported in Aurora global database, where writer instance and Aurora Replicas can be in different regions. Ensure that you use the Aurora Global Database writer endpoint to maintain connectivity after failover or switchover events. For more information on the Aurora Global Database endpoints, see Viewing the endpoints of an Amazon Aurora Global Database. The writer instance and cross-Region Replica must be able to communicate, using VPC Peering. For more information, see VPC peering. If a cross-Region failover happens, you must reconfigure the endpoint to new primary DB cluster endpoint.

> **Note**
>
> When using a cluster endpoint instead of an Aurora Global Database writer endpoint, you'll need to update the cluster endpoint after performing either a global failover or switchover operation.

Supporting table partition

Aurora PostgreSQL Query Plan Management (QPM) supports declarative table partitioning in the following versions:

- 15.3 and higher 15 versions
- 14.8 and higher 14 versions
- 13.11 and higher 13 versions

For more information, see Table Partitioning.

Topics

- Setting up table partition
- Capturing plans for table partition
- Enforcing a table partition plan
- Naming Convention

Setting up table partition

To set up table partition in Aurora PostgreSQL QPM, do as follows:

1. Set `apg_plan_mgmt.plan_hash_version` to 3 or more in the DB cluster parameter group.
2. Navigate to a database that uses Query Plan Management and has entries in `apg_plan_mgmt.dba_plans` view.
3. Call `apg_plan_mgmt.validate_plans('update_plan_hash')` to update the `plan_hash` value in the plans table.
4. Repeat steps 2-3 for all databases with Query Plan Management enabled that have entries in `apg_plan_mgmt.dba_plans` view.

For more information on these parameters, see Parameter reference for Aurora PostgreSQL query plan management.

Capturing plans for table partition

In QPM, different plans are distinguished by their `plan_hash` value. To understand how the `plan_hash` changes, you must first understand similar kind of plans.

The combination of access methods, digit-stripped index names and digit-stripped partition names, accumulated at the Append node level must be constant for plans to be considered the same. The specific partitions accessed in the plans are not significant. In the following example, a table `tbl_a` is created with 4 partitions.

```
postgres=>create table tbl_a(i int, j int, k int, l int, m int) partition by range(i);
CREATE TABLE
postgres=>create table tbl_a1 partition of tbl_a for values from (0) to (1000);
CREATE TABLE
postgres=>create table tbl_a2 partition of tbl_a for values from (1001) to (2000);
CREATE TABLE
postgres=>create table tbl_a3 partition of tbl_a for values from (2001) to (3000);
CREATE TABLE
postgres=>create table tbl_a4 partition of tbl_a for values from (3001) to (4000);
CREATE TABLE
postgres=>create index t_i on tbl_a using btree (i);
CREATE INDEX
postgres=>create index t_j on tbl_a using btree (j);
CREATE INDEX
```

```
postgres=>create index t_k on tbl_a using btree (k);
CREATE INDEX
```

The following plans are considered the same because a single scan method is being used to scan `tbl_a` irrespective of the number of partitions that the query looks up.

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 999 and j < 9910 and k > 50;

                        QUERY PLAN
-----------------------------------------------------------------
Seq Scan on tbl_a1 tbl_a
    Filter: ((i >= 990) AND (i <= 999) AND (j < 9910) AND (k > 50))
SQL Hash: 1553185667, Plan Hash: -694232056
(3 rows)
```

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 1100 and j < 9910 and k > 50;

                        QUERY PLAN
-----------------------------------------------------------------
Append
    ->  Seq Scan on tbl_a1 tbl_a_1
            Filter: ((i >= 990) AND (i <= 1100) AND (j < 9910) AND (k > 50))
    ->  Seq Scan on tbl_a2 tbl_a_2
            Filter: ((i >= 990) AND (i <= 1100) AND (j < 9910) AND (k > 50))
    SQL Hash: 1553185667, Plan Hash: -694232056
    (6 rows)
```

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 2100 and j < 9910 and k > 50;

                QUERY PLAN
-------------------------------------------------------------------------
 Append
   ->  Seq Scan on tbl_a1 tbl_a_1
         Filter: ((i >= 990) AND (i <= 2100) AND (j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 2100) AND (j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a3 tbl_a_3
         Filter: ((i >= 990) AND (i <= 2100) AND (j < 9910) AND (k > 50))
 SQL Hash: 1553185667, Plan Hash: -694232056
```

```
(8 rows)
```

The following 3 plans are also considered the same because at the parent level, the access methods, digit-stripped index names and digit-stripped partition names are `SeqScan tbl_a`, `IndexScan (i_idx) tbl_a`.

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 1100 and j < 9910 and k > 50;

                                QUERY PLAN
---------------------------------------------------------------------------
 Append
   ->  Seq Scan on tbl_a1 tbl_a_1
         Filter: ((i >= 990) AND (i <= 1100) AND (j < 9910) AND (k > 50))
   ->  Index Scan using tbl_a2_i_idx on tbl_a2 tbl_a_2
         Index Cond: ((i >= 990) AND (i <= 1100))
         Filter: ((j < 9910) AND (k > 50))
 SQL Hash: 1553185667, Plan Hash: -993736942
(7 rows)
```

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 2100 and j < 9910 and k > 50;

                                QUERY PLAN
---------------------------------------------------------------------------
 Append
   ->  Index Scan using tbl_a1_i_idx on tbl_a1 tbl_a_1
         Index Cond: ((i >= 990) AND (i <= 2100))
         Filter: ((j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 2100) AND (j < 9910) AND (k > 50))
   ->  Index Scan using tbl_a3_i_idx on tbl_a3 tbl_a_3
         Index Cond: ((i >= 990) AND (i <= 2100))
         Filter: ((j < 9910) AND (k > 50))
 SQL Hash: 1553185667, Plan Hash: -993736942
(10 rows)
```

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 3100 and j < 9910 and k > 50;

                                QUERY PLAN
---------------------------------------------------------------------------
```

```
 Append
   ->  Seq Scan on tbl_a1 tbl_a_1
         Filter: ((i >= 990) AND (i <= 3100) AND (j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 3100) AND (j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a3 tbl_a_3
         Filter: ((i >= 990) AND (i <= 3100) AND (j < 9910) AND (k > 50))
   ->  Index Scan using tbl_a4_i_idx on tbl_a4 tbl_a_4
         Index Cond: ((i >= 990) AND (i <= 3100))
         Filter: ((j < 9910) AND (k > 50))
 SQL Hash: 1553185667, Plan Hash: -993736942
(11 rows)
```

Irrespective of different order and number of occurrences in child partitions, the access methods, digit-stripped index names and digit-stripped partition names are constant at the parent level for each of the above plans.

However, the plans would be considered different if any of the following conditions are met:

- Any additional access methods are used in the plan.

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between
 990 and 2100 and j < 9910 and k > 50;

                                QUERY PLAN
-------------------------------------------------------------------------
 Append
   ->  Seq Scan on tbl_a1 tbl_a_1
         Filter: ((i >= 990) AND (i <= 2100) AND (j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 2100) AND (j < 9910) AND (k > 50))
   ->  Bitmap Heap Scan on tbl_a3 tbl_a_3
         Recheck Cond: ((i >= 990) AND (i <= 2100))
         Filter: ((j < 9910) AND (k > 50))
         ->  Bitmap Index Scan on tbl_a3_i_idx
               Index Cond: ((i >= 990) AND (i <= 2100))
 SQL Hash: 1553185667, Plan Hash: 1134525070
(11 rows)
```

- Any of the access methods in the plan are not used anymore.

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between
 990 and 1100 and j < 9910 and k > 50;
```

```
                                QUERY PLAN
---------------------------------------------------------------------------
 Append
   ->  Seq Scan on tbl_a1 tbl_a_1
         Filter: ((i >= 990) AND (i <= 1100) AND (j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 1100) AND (j < 9910) AND (k > 50))
 SQL Hash: 1553185667, Plan Hash: -694232056
(6 rows)
```

- The index associated with an index method is changed.

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between
 990 and 1100 and j < 9910 and k > 50;

                             QUERY PLAN
---------------------------------------------------------------------------
 Append
   ->  Seq Scan on tbl_a1 tbl_a_1
         Filter: ((i >= 990) AND (i <= 1100) AND (j < 9910) AND (k > 50))
   ->  Index Scan using tbl_a2_j_idx on tbl_a2 tbl_a_2
         Index Cond: (j < 9910)
         Filter: ((i >= 990) AND (i <= 1100) AND (k > 50))
 SQL Hash: 1553185667, Plan Hash: -993343726
(7 rows)
```

Enforcing a table partition plan

Approved plans for partitioned tables are enforced with positional correspondence. The plans are not specific to the partitions, and can be enforced on partitions other than the plans referenced in the original query. Plans also have the capability of being enforced for queries accessing a different number of partitions than the original approved outline.

For example, if the approved outline is for the following plan:

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 2100 and j < 9910 and k > 50;

                                QUERY PLAN
---------------------------------------------------------------------------
 Append
```

```
   ->  Index Scan using tbl_a1_i_idx on tbl_a1 tbl_a_1
         Index Cond: ((i >= 990) AND (i <= 2100))
         Filter: ((j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 2100) AND (j < 9910) AND (k > 50))
   ->  Index Scan using tbl_a3_i_idx on tbl_a3 tbl_a_3
         Index Cond: ((i >= 990) AND (i <= 2100))
         Filter: ((j < 9910) AND (k > 50))
 SQL Hash: 1553185667, Plan Hash: -993736942
(10 rows)
```

Then, this plan can be enforced on SQL queries referencing 2, 4, or more partitions as well. The possible plans that could arise from these scenarios for 2 and 4 partition access are:

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 1100 and j < 9910 and k > 50;

                                QUERY PLAN
-------------------------------------------------------------------------------
 Append
   ->  Index Scan using tbl_a1_i_idx on tbl_a1 tbl_a_1
         Index Cond: ((i >= 990) AND (i <= 1100))
         Filter: ((j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 1100) AND (j < 9910) AND (k > 50))
 Note: An Approved plan was used instead of the minimum cost plan.
 SQL Hash: 1553185667, Plan Hash: -993736942, Minimum Cost Plan Hash: -1873216041
(8 rows)
```

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 3100 and j < 9910 and k > 50;

                                QUERY PLAN
-------------------------------------------------------------------------
 Append
   ->  Index Scan using tbl_a1_i_idx on tbl_a1 tbl_a_1
         Index Cond: ((i >= 990) AND (i <= 3100))
         Filter: ((j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 3100) AND (j < 9910) AND (k > 50))
   ->  Index Scan using tbl_a3_i_idx on tbl_a3 tbl_a_3
         Index Cond: ((i >= 990) AND (i <= 3100))
         Filter: ((j < 9910) AND (k > 50))
```

```
   ->  Seq Scan on tbl_a4 tbl_a_4
         Filter: ((i >= 990) AND (i <= 3100) AND (j < 9910) AND (k > 50))
 Note: An Approved plan was used instead of the minimum cost plan.
 SQL Hash: 1553185667, Plan Hash: -993736942, Minimum Cost Plan Hash: -1873216041
(12 rows)
```

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 3100 and j < 9910 and k > 50;

                                QUERY PLAN
-------------------------------------------------------------------------------
 Append
   ->  Index Scan using tbl_a1_i_idx on tbl_a1 tbl_a_1
         Index Cond: ((i >= 990) AND (i <= 3100))
         Filter: ((j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 3100) AND (j < 9910) AND (k > 50))
   ->  Index Scan using tbl_a3_i_idx on tbl_a3 tbl_a_3
         Index Cond: ((i >= 990) AND (i <= 3100))
         Filter: ((j < 9910) AND (k > 50))
   ->  Index Scan using tbl_a4_i_idx on tbl_a4 tbl_a_4
         Index Cond: ((i >= 990) AND (i <= 3100))
         Filter: ((j < 9910) AND (k > 50))
 Note: An Approved plan was used instead of the minimum cost plan.
 SQL Hash: 1553185667, Plan Hash: -993736942, Minimum Cost Plan Hash: -1873216041
(14 rows)
```

Consider another approved plan with different access methods for each partition:

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 2100 and j < 9910 and k > 50;

                                QUERY PLAN
-------------------------------------------------------------------------
 Append
   ->  Index Scan using tbl_a1_i_idx on tbl_a1 tbl_a_1
         Index Cond: ((i >= 990) AND (i <= 2100))
         Filter: ((j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 2100) AND (j < 9910) AND (k > 50))
   ->  Bitmap Heap Scan on tbl_a3 tbl_a_3
         Recheck Cond: ((i >= 990) AND (i <= 2100))
         Filter: ((j < 9910) AND (k > 50))
```

```
         ->  Bitmap Index Scan on tbl_a3_i_idx
               Index Cond: ((i >= 990) AND (i <= 2100))
 SQL Hash: 1553185667, Plan Hash: 2032136998
(12 rows)
```

In this case, any plan that reads from two partitions would fail to be enforced. Unless all of the (access method, index name) combinations from the approved plan are usable, the plan cannot be enforced. For example, the following plans have different plan hashes and the approved plan can't be enforced in these cases:

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 1900 and j < 9910 and k > 50;

                              QUERY PLAN
-----------------------------------------------------------------------
 Append
   ->  Bitmap Heap Scan on tbl_a1 tbl_a_1
         Recheck Cond: ((i >= 990) AND (i <= 1900))
         Filter: ((j < 9910) AND (k > 50))
         ->  Bitmap Index Scan on tbl_a1_i_idx
               Index Cond: ((i >= 990) AND (i <= 1900))
   ->  Bitmap Heap Scan on tbl_a2 tbl_a_2
         Recheck Cond: ((i >= 990) AND (i <= 1900))
         Filter: ((j < 9910) AND (k > 50))
         ->  Bitmap Index Scan on tbl_a2_i_idx
               Index Cond: ((i >= 990) AND (i <= 1900))
  Note: This is not an Approved plan.  No usable Approved plan was found.
  SQL Hash: 1553185667, Plan Hash: -568647260
(13 rows)
```

```
postgres=>explain (hashes true, costs false) select j, k from tbl_a where i between 990
 and 1900 and j < 9910 and k > 50;

                              QUERY PLAN
-----------------------------------------------------------------------
 Append
   ->  Index Scan using tbl_a1_i_idx on tbl_a1 tbl_a_1
         Index Cond: ((i >= 990) AND (i <= 1900))
         Filter: ((j < 9910) AND (k > 50))
   ->  Seq Scan on tbl_a2 tbl_a_2
         Filter: ((i >= 990) AND (i <= 1900) AND (j < 9910) AND (k > 50))
 Note: This is not an Approved plan.  No usable Approved plan was found.
```

```
 SQL Hash: 1553185667, Plan Hash: -496793743
(8 rows)
```

Naming Convention

For QPM to enforce a plan with declarative partitioned tables, you must follow specific naming rules for parent tables, table partitions, and indexes:

- **Parent table names** – These names must differ by alphabets or special characters, and not by just digits. For example, tA, tB, and tC are acceptable names for separate parent tables while t1, t2, and t3 are not.
- **Individual partition table names** – Partitions of the same parent should differ from one another by digits only. For example, acceptable partition names of tA could be tA1, tA2 or t1A, t2A or even multiple digits.

  Any other differences (letters, special characters) will not guarantee plan enforcement.
- **Index names** – In partition table hierarchy, make sure that all indexes have unique names. This means that the non-numeric parts of the names must be different. For example, if you have a partitioned table named `tA` with an index named `tA_col1_idx1`, you can't have another index named `tA_col1_idx2`. However, you can have an index called `tA_a_col1_idx2` because the non-numeric part of the name is unique. This rule applies to indexes created on both the parent table and individual partition tables.

Failure to adhere to the above naming conventions may result in failure of approved plans enforcement. The following example illustrates such a failed enforcement:

```
postgres=>create table t1(i int, j int, k int, l int, m int) partition by range(i);
CREATE TABLE
postgres=>create table t1a partition of t1 for values from (0) to (1000);
CREATE TABLE
postgres=>create table t1b partition of t1 for values from (1001) to (2000);
CREATE TABLE
postgres=>SET apg_plan_mgmt.capture_plan_baselines TO 'manual';
SET
postgres=>explain (hashes true, costs false) select count(*) from t1 where i > 0;

                            QUERY PLAN
------------------------------------------------------------------------------
 Aggregate
   ->  Append
```

```
         ->  Seq Scan on t1a t1_1
               Filter: (i > 0)
         ->  Seq Scan on t1b t1_2
               Filter: (i > 0)
 SQL Hash: -1720232281, Plan Hash: -1010664377
(7 rows)
```

```
postgres=>SET apg_plan_mgmt.use_plan_baselines TO 'on';
SET
postgres=>explain (hashes true, costs false) select count(*) from t1 where i > 1000;

                            QUERY PLAN
------------------------------------------------------------------------
 Aggregate
   ->  Seq Scan on t1b t1
         Filter: (i > 1000)
 Note: This is not an Approved plan. No usable Approved plan was found.
 SQL Hash: -1720232281, Plan Hash: 335531806
(5 rows)
```

Even though the two plans might appear identical, their `Plan Hash` values are different due to the names of the child tables. The table names vary by alpha characters instead of just digits leading to an enforcement failure.

Working with extensions and foreign data wrappers

To extend the functionality to your Aurora PostgreSQL-Compatible Edition DB cluster, you can install and use various PostgreSQL *extensions*. For example, if your use case calls for intensive data entry across very large tables, you can install the `pg_partman` extension to partition your data and thus spread the workload.

> **Note**
>
> As of Aurora PostgreSQL 14.5, Aurora PostgreSQL supports Trusted Language Extensions for PostgreSQL. This feature is implemented as the extension `pg_tle`, which you can add to your Aurora PostgreSQL. By using this extension, developers can create their own PostgreSQL extensions in a safe environment that simplifies the setup and configuration requirements, as well as much of the preliminary testing for new extensions. For more information, see Working with Trusted Language Extensions for PostgreSQL.

In some cases, rather than installing an extension, you might add a specific *module* to the list of `shared_preload_libraries` in your Aurora PostgreSQL DB cluster's custom DB cluster parameter group. Typically, the default DB cluster parameter group loads only the `pg_stat_statements`, but several other modules are available to add to the list. For example, you can add scheduling capability by adding the `pg_cron` module, as detailed in Scheduling maintenance with the PostgreSQL pg_cron extension. As another example, you can log query execution plans by loading the `auto_explain` module. To learn more, see Logging execution plans of queries in the Amazon knowledge center.

An extension that provides access to external data is more specifically known as a *foreign data wrapper* (FDW). As one example, the `oracle_fdw` extension allows your Aurora PostgreSQL DB cluster to work with Oracle databases.

You can also specify precisely which extensions can be installed on your Aurora PostgreSQL DB instance, by listing them in the `rds.allowed_extensions` parameter. For more information, see Restricting installation of PostgreSQL extensions.

Following, you can find information about setting up and using some of the extensions, modules, and FDWs available for Aurora PostgreSQL. For simplicity's sake, these are all referred to as "extensions." You can find listings of extensions that you can use with the currently available

Aurora PostgreSQL versions, see Extension versions for Amazon Aurora PostgreSQL in the *Release Notes for Aurora PostgreSQL*.

- Managing large objects with the lo module
- Managing spatial data with the PostGIS extension
- Managing PostgreSQL partitions with the pg_partman extension
- Scheduling maintenance with the PostgreSQL pg_cron extension
- Using pgAudit to log database activity
- Using pglogical to synchronize data across instances
- rds_tools functions reference
- Working with Oracle databases by using the oracle_fdw extension
- Working with SQL Server databases by using the tds_fdw extension

Using Amazon Aurora delegated extension support for PostgreSQL

Using Amazon Aurora delegated extension support for PostgreSQL, you can delegate the extension management to a user who need not be an `rds_superuser`. With this delegated extension support, a new role called `rds_extension` is created and you must assign this to a user to manage other extensions. This role can create, update, and drop extensions.

You can specify the extensions that can be installed on your Aurora PostgreSQL DB instance, by listing them in the `rds.allowed_extensions` parameter. For more information, see Using PostgreSQL extensions with Amazon RDS for PostgreSQL.

You can restrict the list of extensions available that can be managed by the user with the `rds_extension` role using `rds.allowed_delegated_extensions` parameter.

The delegated extension support is available in the following versions:

- All higher versions
- 15.5 and higher 15 versions
- 14.10 and higher 14 versions
- 13.13 and higher 13 versions
- 12.17 and higher 12 versions

Topics

- Turning on delegate extension support to a user
- Configuration used in Aurora delegated extension support for PostgreSQL
- Turning off the support for the delegated extension
- Benefits of using Amazon Aurora delegated extension support
- Limitation of Aurora delegated extension support for PostgreSQL
- Permissions required for certain extensions
- Security Considerations
- Drop extension cascade disabled
- Example extensions that can be added using delegated extension support

Turning on delegate extension support to a user

You must perform the following to enable delegate extension support to a user:

1. **Grant `rds_extension` role to a user** – Connect to the database as `rds_superuser` and execute the following command:

   ```
   Postgres => grant rds_extension to user_name;
   ```

2. **Set the list of extensions available for delegated users to manage** – The `rds.allowed_delegated_extensions` allows you to specify a subset of the available extensions using `rds.allowed_extensions` in the DB cluster parameter. You can perform this at one of the following levels:

   - In the cluster or the instance parameter group, through the Amazon Web Services Management Console or API. For more information, see Parameter groups for Amazon Aurora.
   - Use the following command at the database level:

     ```
     alter database database_name set rds.allowed_delegated_extensions =
      'extension_name_1,
                        extension_name_2,...extension_name_n';
     ```

   - Use the following command at the user level:

     ```
     alter user user_name set rds.allowed_delegated_extensions = 'extension_name_1,
     ```

```
                    extension_name_2,...extension_name_n';
```

> **Note**
>
> You need not restart the database after changing the `rds.allowed_delegated_extensions` dynamic parameter.

3. **Allow access to the delegated user to objects created during the extension creation process** – Certain extensions create objects that require additional permissions to be granted before the user with `rds_extension` role can access them. The `rds_superuser` must grant the delegated user access to those objects. One of the options is to use an event trigger to automatically grant permission to the delegated user.

   Example of event trigger

   If you want to allow a delegated user with `rds_extension` to use extensions that require setting permissions on their objects created by the extension creation, you can customize the below example of an event trigger and add only the extensions for which you want the delegated users to have access to the full functionality. This event trigger can be created on template1 (the default template), therefore all database created from template1 will have that event trigger. When a delegated user installs the extension, this trigger will automatically grant ownership on the objects created by the extension.

```
CREATE OR REPLACE FUNCTION create_ext()

  RETURNS event_trigger AS $$

DECLARE

  schemaname TEXT;
  databaseowner TEXT;

  r RECORD;

BEGIN

  IF tg_tag = 'CREATE EXTENSION' and current_user != 'rds_superuser' THEN
    RAISE NOTICE 'SECURITY INVOKER';
```

```
   RAISE NOTICE 'user: %', current_user;
   FOR r IN SELECT * FROM pg_catalog.pg_event_trigger_ddl_commands()
   LOOP
       CONTINUE WHEN r.command_tag != 'CREATE EXTENSION' OR r.object_type !=
'extension';

       schemaname = (
           SELECT n.nspname
           FROM pg_catalog.pg_extension AS e
           INNER JOIN pg_catalog.pg_namespace AS n
           ON e.extnamespace = n.oid
           WHERE e.oid = r.objid
       );

       databaseowner = (
           SELECT pg_catalog.pg_get_userbyid(d.datdba)
           FROM pg_catalog.pg_database d
           WHERE d.datname = current_database()
       );
       RAISE NOTICE 'Record for event trigger %, objid: %,tag: %, current_user: %,
schema: %, database_owenr: %', r.object_identity, r.objid, tg_tag, current_user,
schemaname, databaseowner;
       IF r.object_identity = 'address_standardizer_data_us' THEN
           EXECUTE pg_catalog.format('GRANT SELECT, UPDATE, INSERT, DELETE ON
TABLE %I.us_gaz TO %I WITH GRANT OPTION;', schemaname, databaseowner);
           EXECUTE pg_catalog.format('GRANT SELECT, UPDATE, INSERT, DELETE ON
TABLE %I.us_lex TO %I WITH GRANT OPTION;', schemaname, databaseowner);
           EXECUTE pg_catalog.format('GRANT SELECT, UPDATE, INSERT, DELETE ON
TABLE %I.us_rules TO %I WITH GRANT OPTION;', schemaname, databaseowner);
       ELSIF r.object_identity = 'dict_int' THEN
           EXECUTE pg_catalog.format('ALTER TEXT SEARCH DICTIONARY %I.intdict
OWNER TO %I;', schemaname, databaseowner);
       ELSIF r.object_identity = 'pg_partman' THEN
           EXECUTE pg_catalog.format('GRANT SELECT, UPDATE, INSERT, DELETE ON
TABLE %I.part_config TO %I WITH GRANT OPTION;', schemaname, databaseowner);
           EXECUTE pg_catalog.format('GRANT SELECT, UPDATE, INSERT, DELETE ON
TABLE %I.part_config_sub TO %I WITH GRANT OPTION;', schemaname, databaseowner);
           EXECUTE pg_catalog.format('GRANT SELECT, UPDATE, INSERT, DELETE
ON TABLE %I.custom_time_partitions TO %I WITH GRANT OPTION;', schemaname,
databaseowner);
       ELSIF r.object_identity = 'postgis_topology' THEN
           EXECUTE pg_catalog.format('GRANT SELECT, UPDATE, INSERT, DELETE ON ALL
TABLES IN SCHEMA topology TO %I WITH GRANT OPTION;', databaseowner);
```

```
            EXECUTE pg_catalog.format('GRANT USAGE, SELECT ON ALL SEQUENCES IN
 SCHEMA topology TO %I WITH GRANT OPTION;', databaseowner);
            EXECUTE pg_catalog.format('GRANT EXECUTE ON ALL FUNCTIONS IN SCHEMA
 topology TO %I WITH GRANT OPTION;', databaseowner);
            EXECUTE pg_catalog.format('GRANT USAGE ON SCHEMA topology TO %I WITH
 GRANT OPTION;', databaseowner);
        END IF;
    END LOOP;
  END IF;
END;
$$ LANGUAGE plpgsql SECURITY DEFINER;

CREATE EVENT TRIGGER log_create_ext ON ddl_command_end EXECUTE PROCEDURE
 create_ext();
```

Configuration used in Aurora delegated extension support for PostgreSQL

Configuration Name	Description	Default Value	Notes	Who can modify or grant permission
`rds.allowed_delegated_extensions`	This parameter limits the extensions a rds_extension role can manage in a database. It must be a subset of rds.allowed_extensions.	empty string	• By default, this parameter is empty string, which means that no extensions have been delegated to users with `rds_extension` . • Any supported extension can be added if the user has permission to do so. To do this, set the	rds_superuser

Configuration Name	Description	Default Value	Notes	Who can modify or grant permission
			`rds.allowed_delegated_extensions` parameter to a string of comma-separated extension names. By adding a list of extensions to this parameter, you explicitly identify the extensions that the user with the `rds_extension` role can install. • When set to `*`, it means that all extensions listed in `rds_allowed_extensions` are delegated to users with `rds_extension` role. To learn more about setting up this parameter	

Configuration Name	Description	Default Value	Notes	Who can modify or grant permission
			, see Turning on delegate extension support to a user.	
rds.allowed_extensions	This parameter lets the customer limit the extensions that can be installed in the Aurora PostgreSQL DB instance. For more information, see Restricting installation of PostgreSQL extensions	"*"	By default, this parameter is set to "*", which means that all extensions supported on RDS for PostgreSQL and Aurora PostgreSQL are allowed to be created by users with necessary privileges. Empty means no extensions can be installed in the Aurora PostgreSQL DB instance.	administrator

Confic tion Name	Description	Default Value	Notes	Who can modify or grant permission
rds.c ated_ nsior ow_dr ascac	This parameter controls the ability for user with rds_exten sion to drop the extension using a cascade option.	off	By default, rds.deleg ated_exte nsion_all ow_drop_c ascade is set to off. This means that users with rds_extension are not allowed to drop an extension using the cascade option. To grant that ability, the rds.deleg ated_exte nsion_all ow_drop_c ascade parameter should be set to on.	rds_superuser

Turning off the support for the delegated extension

Turning off partially

The delegated users can't create new extensions but can still update existing extensions.

- Reset rds.allowed_delegated_extensions to the default value in the DB cluster parameter group.
- Use the following command at the database level:

```
alter database database_name reset rds.allowed_delegated_extensions;
```

- Use the following command at the user level:

```
alter user user_name reset rds.allowed_delegated_extensions;
```

Turning off fully

Revoking `rds_extension` role from a user will revert the user to standard permissions. The user can no longer create, update, or drop extensions.

```
postgres => revoke rds_extension from user_name;
```

Benefits of using Amazon Aurora delegated extension support

By using Amazon Aurora delegated extension support for PostgreSQL, you securely delegate the extension management to users who do not have the `rds_superuser` role. This feature provides the following benefits:

- You can easily delegate extension management to users of your choice.
- This doesn't require `rds_superuser` role.
- Provides ability to support different set of extensions for different databases in the same DB cluster.

Limitation of Aurora delegated extension support for PostgreSQL

- Objects created during the extension creation process may require additional privileges for the extension to function properly.

Permissions required for certain extensions

In order to create, use, or update the following extensions, the delegated user should have the necessary privileges on the following functions, tables, and schema.

Exte s that need owne or perm ns	Function	Tables	Schema	Text Search Dictionary	Comment
addr tand er_da s		us_gaz, us_lex, us_lex, I.us_rule s			
amch	bt_index_ check, bt_index_ parent_check				
dict_				intdict	
pg_p n		custom_ti me_partit ions, part_conf ig, part_conf ig_sub			
pg_s tater					
Post(	st_tileenvelope	spatial_ref_sys			
post aster					
post opol		topology, layer	topology		the delegated user Must be

Exte s that need own or perm ns	Function	Tables	Schema	Text Search Dictionary	Comment
					the database owner
log_f	create_fo reign_tab le_for_log_file				
rds_t	role_pass word_encr yption_type				
post iger_ oder		geocode_s ettings_d efault, geocode_s ettings	tiger		
pg_f acem	pg_freespace				
pg_v lity	pg_visibility				

Security Considerations

Keep in mind that a user with `rds_extension` role will be able to manage extensions on all databases they have the connect privilege on. If the intention is to have a delegated user manage extension on a single database, a good practice is to revoke all privileges from public on each database, then explicitly grant the connect privilege for that specific database to the delegate user.

There are several extensions that can allow a user to access information from multiple database. Ensure the users you grant `rds_extension` has cross database capabilities before adding these extensions to `rds.allowed_delegated_extensions`. For example, `postgres_fdw` and `dblink` provide functionality to query across databases on the same instance or remote instances. `log_fdw` reads the postgres engine log files, which are for all databases in the instance, potentially containing slow queries or error messages from multiple databases. `pg_cron` enables running scheduled background jobs on the DB instance and can configure jobs to run in a different database.

Drop extension cascade disabled

The ability to drop the extension with cascade option by a user with the `rds_extension` role is controlled by `rds.delegated_extension_allow_drop_cascade` parameter. By default, `rds.delegated_extension_allow_drop_cascade` is set to `off`. This means that users with the `rds_extension` role are not allowed to drop an extension using the cascade option as shown in the below query.

```
DROP EXTENSION CASCADE;
```

As this will automatically drop objects that depend on the extension, and in turn all objects that depend on those objects. Attempting to use the cascade option will result in an error.

To grant that ability, the `rds.delegated_extension_allow_drop_cascade` parameter should be set to on.

Changing the `rds.delegated_extension_allow_drop_cascade` dynamic parameter doesn't require a database restart. You can do this at one of the following levels:

- In the cluster or the instance parameter group, through the Amazon Web Services Management Console or API.
- Using the following command at the database level:

```
alter database database_name set rds.delegated_extension_allow_drop_cascade = 'on';
```

- Using the following command at the user level:

```
alter role tenant_user set rds.delegated_extension_allow_drop_cascade = 'on';
```

Example extensions that can be added using delegated extension support

- rds_tools

```
extension_test_db=> create extension rds_tools;
CREATE EXTENSION
extension_test_db=> SELECT * from rds_tools.role_password_encryption_type() where
 rolname = 'pg_read_server_files';
ERROR: permission denied for function role_password_encryption_type
```

- amcheck

```
extension_test_db=> CREATE TABLE amcheck_test (id int);
CREATE TABLE
extension_test_db=> INSERT INTO amcheck_test VALUES (generate_series(1,100000));
INSERT 0 100000
extension_test_db=> CREATE INDEX amcheck_test_btree_idx ON amcheck_test USING btree
 (id);
CREATE INDEX
extension_test_db=> create extension amcheck;
CREATE EXTENSION
extension_test_db=> SELECT bt_index_check('amcheck_test_btree_idx'::regclass);
ERROR: permission denied for function bt_index_check
extension_test_db=> SELECT bt_index_parent_check('amcheck_test_btree_idx'::regclass);
ERROR: permission denied for function bt_index_parent_check
```

- pg_freespacemap

```
extension_test_db=> create extension pg_freespacemap;
CREATE EXTENSION
extension_test_db=> SELECT * FROM pg_freespace('pg_authid');
ERROR: permission denied for function pg_freespace
extension_test_db=> SELECT * FROM pg_freespace('pg_authid',0);
ERROR: permission denied for function pg_freespace
```

- pg_visibility

```
extension_test_db=> create extension pg_visibility;
CREATE EXTENSION
extension_test_db=> select * from pg_visibility('pg_database'::regclass);
ERROR: permission denied for function pg_visibility
```

- postgres_fdw

```
extension_test_db=> create extension postgres_fdw;
CREATE EXTENSION
extension_test_db=> create server myserver foreign data wrapper postgres_fdw options
 (host 'foo', dbname 'foodb', port '5432');
ERROR: permission denied for foreign-data wrapper postgres_fdw
```

Managing large objects with the lo module

The lo module (extension) is for database users and developers working with PostgreSQL databases through JDBC or ODBC drivers. Both JDBC and ODBC expect the database to handle deletion of large objects when references to them change. However, PostgreSQL doesn't work that way. PostgreSQL doesn't assume that an object should be deleted when its reference changes. The result is that objects remain on disk, unreferenced. The lo extension includes a function that you use to trigger on reference changes to delete objects if needed.

> **Tip**
>
> To determine if your database can benefit from the lo extension, use the `vacuumlo` utility to check for orphaned large objects. To get counts of orphaned large objects without taking any action, run the utility with the `-n` option (no-op). To learn how, see vacuumlo utility following.

The lo module is available for Aurora PostgreSQL 13.7, 12.11, 11.16, 10.21 and higher minor versions.

To install the module (extension), you need `rds_superuser` privileges. Installing the lo extension adds the following to your database:

- `lo` – This is a large object (lo) data type that you can use for binary large objects (BLOBs) and other large objects. The `lo` data type is a domain of the `oid` data type. In other words, it's an object identifier with optional constraints. For more information, see Object identifiers in the PostgreSQL documentation. In simple terms, you can use the `lo` data type to distinguish your database columns that hold large object references from other object identifiers (OIDs).
- `lo_manage` – This is a function that you can use in triggers on table columns that contain large object references. Whenever you delete or modify a value that references a large object, the

trigger unlinks the object (`lo_unlink`) from its reference. Use the trigger on a column only if the column is the sole database reference to the large object.

For more information about the large objects module, see lo in the PostgreSQL documentation.

Installing the lo extension

Before installing the lo extension, make sure that you have `rds_superuser` privileges.

To install the lo extension

1. Use `psql` to connect to the primary DB instance of your Aurora PostgreSQL DB cluster.

   ```
   psql --host=your-cluster-instance-1.666666666666.aws-region.rds.amazonaws.com --
   port=5432 --username=postgres --password
   ```

   When prompted, enter your password. The `psql` client connects and displays the default administrative connection database, `postgres=>`, as the prompt.

2. Install the extension as follows.

   ```
   postgres=> CREATE EXTENSION lo;
   CREATE EXTENSION
   ```

You can now use the `lo` data type to define columns in your tables. For example, you can create a table (`images`) that contains raster image data. You can use the `lo` data type for a column `raster`, as shown in the following example, which creates a table.

```
postgres=> CREATE TABLE images (image_name text, raster lo);
```

Using the lo_manage trigger function to delete objects

You can use the `lo_manage` function in a trigger on a `lo` or other large object columns to clean up (and prevent orphaned objects) when the `lo` is updated or deleted.

To set up triggers on columns that reference large objects

- Do one of the following:

- Create a BEFORE UPDATE OR DELETE trigger on each column to contain unique references to large objects, using the column name for the argument.

```
postgres=> CREATE TRIGGER t_raster BEFORE UPDATE OR DELETE ON images
    FOR EACH ROW EXECUTE FUNCTION lo_manage(raster);
```

- Apply a trigger only when the column is being updated.

```
postgres=> CREATE TRIGGER t_raster BEFORE UPDATE OF images
    FOR EACH ROW EXECUTE FUNCTION lo_manage(raster);
```

The `lo_manage` trigger function works only in the context of inserting or deleting column data, depending on how you define the trigger. It has no effect when you perform a DROP or TRUNCATE operation on a database. That means that you should delete object columns from any tables before dropping, to prevent creating orphaned objects.

For example, suppose that you want to drop the database containing the `images` table. You delete the column as follows.

```
postgres=> DELETE FROM images COLUMN raster
```

Assuming that the `lo_manage` function is defined on that column to handle deletes, you can now safely drop the table.

Removing orphaned large objects using `vacuumlo`

The `vacuumlo` utility identifies and removes orphaned large objects from databases. This utility has been available since PostgreSQL 9.1.24. If your database users routinely work with large objects, we recommend that you run `vacuumlo` occasionally to clean up orphaned large objects.

Before installing the lo extension, you can use `vacuumlo` to assess whether your Aurora PostgreSQL DB cluster can benefit. To do so, run `vacuumlo` with the `-n` option (no-op) to show what would be removed, as shown in the following:

```
$ vacuumlo -v -n -h your-cluster-instance-1.666666666666.aws-region.rds.amazonaws.com -
p 5433 -U postgres docs-lab-spatial-db
Password:*****
Connected to database "docs-lab-spatial-db"
```

```
Test run: no large objects will be removed!
Would remove 0 large objects from database "docs-lab-spatial-db".
```

As the output shows, orphaned large objects aren't a problem for this particular database.

For more information about this utility, see vacuumlo in the PostgreSQL documentation.

Understanding how vacuumlo works

The vacuumlo command removes orphaned large objects (LOs) from your PostgreSQL database without affecting or conflicting with your user tables.

The command works as follows:

1. vacuumlo starts by creating a temporary table containing all the Object IDs (OIDs) of the large objects in your database.
2. vacuumlo then scans through every column in the database that uses the data types oid or lo. If vacuumlo finds a matching OID in these columns, it removes the OID from the temporary table. vacuumlo checks only columns specifically named oid or lo, not domains based on these types.
3. The remaining entries in the temporary table represent orphaned LOs, which vacuumlo then safely removes.

Improving vacuumlo performance

You can potentially improve the performance of vacuumlo by increasing the batch size using the -l option. This allows vacuumlo to process more LOs at once.

If your system has sufficient memory and you can accommodate the temporary table completely in memory, increasing the temp_buffers setting at the database level may improve performance. This allows the table to reside entirely in memory, which can enhance the overall performance.

Following query estimates the size of the temporary table:

```
SELECT
    pg_size_pretty(SUM(pg_column_size(oid))) estimated_lo_temp_table_size
FROM
    pg_largeobject_metadata;
```

Considerations for large objects

Following you can find some important considerations to note when working with large objects:

- `Vacuumlo` is the only solution as there is currently no other method to remove orphaned LOs.
- Tools like pglogical, native logical replication, and Amazon DMS that use replication technologies do not support replicating large objects.
- When designing your database schema, avoid using large objects when possible and consider using alternative data types like `bytea` instead.
- Run `vacuumlo` regularly, at least weekly, to prevent issues with orphaned LOs.
- Use a trigger with the `lo_manage` function on tables that store large objects to help prevent orphaned LOs from being created.

Managing spatial data with the PostGIS extension

PostGIS is an extension to PostgreSQL for storing and managing spatial information. To learn more about PostGIS, see PostGIS.net.

Starting with version 10.5, PostgreSQL supports the libprotobuf 1.3.0 library used by PostGIS for working with map box vector tile data.

Setting up the PostGIS extension requires `rds_superuser` privileges. We recommend that you create a user (role) to manage the PostGIS extension and your spatial data. The PostGIS extension and its related components add thousands of functions to PostgreSQL. Consider creating the PostGIS extension in its own schema if that makes sense for your use case. The following example shows how to install the extension in its own database, but this isn't required.

Topics

- Step 1: Create a user (role) to manage the PostGIS extension
- Step 2: Load the PostGIS extensions
- Step 3: Transfer ownership of the extension schemas
- Step 4: Transfer ownership of the PostGIS tables
- Step 5: Test the extensions
- Step 6: Upgrade the PostGIS extension

- PostGIS extension versions
- Upgrading PostGIS 2 to PostGIS 3

Step 1: Create a user (role) to manage the PostGIS extension

First, connect to your RDS for PostgreSQL DB instance as a user that has `rds_superuser` privileges. If you kept the default name when you set up your instance, you connect as `postgres`.

```
psql --host=111122223333.aws-region.rds.amazonaws.com --port=5432 --username=postgres
 --password
```

Create a separate role (user) to administer the PostGIS extension.

```
postgres=>  CREATE ROLE gis_admin LOGIN PASSWORD 'change_me';
CREATE ROLE
```

Grant this role `rds_superuser` privileges, to allow the role to install the extension.

```
postgres=> GRANT rds_superuser TO gis_admin;
GRANT
```

Create a database to use for your PostGIS artifacts. This step is optional. Or you can create a schema in your user database for the PostGIS extensions, but this also isn't required.

```
postgres=> CREATE DATABASE lab_gis;
CREATE DATABASE
```

Give the `gis_admin` all privileges on the `lab_gis` database.

```
postgres=> GRANT ALL PRIVILEGES ON DATABASE lab_gis TO gis_admin;
GRANT
```

Exit the session and reconnect to your RDS for PostgreSQL DB instance as `gis_admin`.

```
postgres=> psql --host=111122223333.aws-region.rds.amazonaws.com --port=5432 --
username=gis_admin --password --dbname=lab_gis
Password for user gis_admin:...
```

```
lab_gis=>
```

Continue setting up the extension as detailed in the next steps.

Step 2: Load the PostGIS extensions

The PostGIS extension includes several related extensions that work together to provide geospatial functionality. Depending on your use case, you might not need all the extensions created in this step.

Use `CREATE EXTENSION` statements to load the PostGIS extensions.

```
CREATE EXTENSION postgis;
CREATE EXTENSION
CREATE EXTENSION postgis_raster;
CREATE EXTENSION
CREATE EXTENSION fuzzystrmatch;
CREATE EXTENSION
CREATE EXTENSION postgis_tiger_geocoder;
CREATE EXTENSION
CREATE EXTENSION postgis_topology;
CREATE EXTENSION
CREATE EXTENSION address_standardizer_data_us;
CREATE EXTENSION
```

You can verify the results by running the SQL query shown in the following example, which lists the extensions and their owners.

```
SELECT n.nspname AS "Name",
  pg_catalog.pg_get_userbyid(n.nspowner) AS "Owner"
  FROM pg_catalog.pg_namespace n
  WHERE n.nspname !~ '^pg_' AND n.nspname <> 'information_schema'
  ORDER BY 1;
List of schemas
     Name     |   Owner
--------------+-----------
 public       | postgres
 tiger        | rdsadmin
 tiger_data   | rdsadmin
 topology     | rdsadmin
(4 rows)
```

Step 3: Transfer ownership of the extension schemas

Use the ALTER SCHEMA statements to transfer ownership of the schemas to the `gis_admin` role.

```
ALTER SCHEMA tiger OWNER TO gis_admin;
ALTER SCHEMA
ALTER SCHEMA tiger_data OWNER TO gis_admin;
ALTER SCHEMA
ALTER SCHEMA topology OWNER TO gis_admin;
ALTER SCHEMA
```

You can confirm the ownership change by running the following SQL query. Or you can use the \dn metacommand from the psql command line.

```
SELECT n.nspname AS "Name",
  pg_catalog.pg_get_userbyid(n.nspowner) AS "Owner"
  FROM pg_catalog.pg_namespace n
  WHERE n.nspname !~ '^pg_' AND n.nspname <> 'information_schema'
  ORDER BY 1;

       List of schemas
     Name     |     Owner
--------------+---------------
 public       | postgres
 tiger        | gis_admin
 tiger_data   | gis_admin
 topology     | gis_admin
(4 rows)
```

Step 4: Transfer ownership of the PostGIS tables

> **Note**
>
> Do not change ownership of the PostGIS functions. Proper operation and future upgrades of PostGIS require these functions to retain original ownership. For more information about PostGIS permissions, see PostgreSQL Security.

Use the following function to transfer ownership of the PostGIS tables to the `gis_admin` role. Run the following statement from the psql prompt to create the function.

```
CREATE FUNCTION exec(text) returns text language plpgsql volatile AS $f$ BEGIN EXECUTE
 $1; RETURN $1; END; $f$;
CREATE FUNCTION
```

Next, run the following query to run the `exec` function that in turn runs the statements and alters the permissions.

```
SELECT exec('ALTER TABLE ' || quote_ident(s.nspname) || '.' || quote_ident(s.relname)
 || ' OWNER TO gis_admin;')
  FROM (
    SELECT nspname, relname
    FROM pg_class c JOIN pg_namespace n ON (c.relnamespace = n.oid)
    WHERE nspname in ('tiger','topology') AND
    relkind IN ('r','S','v') ORDER BY relkind = 'S')
s;
```

Step 5: Test the extensions

To avoid needing to specify the schema name, add the `tiger` schema to your search path using the following command.

```
SET search_path=public,tiger;
SET
```

Test the `tiger` schema by using the following SELECT statement.

```
SELECT address, streetname, streettypeabbrev, zip
 FROM normalize_address('1 Devonshire Place, Boston, MA 02109') AS na;
address | streetname | streettypeabbrev |  zip
---------+------------+------------------+-------
       1 | Devonshire | Pl               | 02109
(1 row)
```

To learn more about this extension, see Tiger Geocoder in the PostGIS documentation.

Test access to the `topology` schema by using the following `SELECT` statement. This calls the `createtopology` function to register a new topology object (my_new_topo) with the specified spatial reference identifier (26986) and default tolerance (0.5). To learn more, see CreateTopology in the PostGIS documentation.

```
SELECT topology.createtopology('my_new_topo',26986,0.5);
 createtopology
----------------
              1
(1 row)
```

Step 6: Upgrade the PostGIS extension

Each new release of PostgreSQL supports one or more versions of the PostGIS extension compatible with that release. Upgrading the PostgreSQL engine to a new version doesn't automatically upgrade the PostGIS extension. Before upgrading the PostgreSQL engine, you typically upgrade PostGIS to the newest available version for the current PostgreSQL version. For details, see PostGIS extension versions.

After the PostgreSQL engine upgrade, you then upgrade the PostGIS extension again, to the version supported for the newly upgraded PostgreSQL engine version. For more information about upgrading the PostgreSQL engine, see Testing an upgrade of your production DB cluster to a new major version.

You can check for available PostGIS extension version updates on your Aurora PostgreSQL DB cluster at any time. To do so, run the following command. This function is available with PostGIS 2.5.0 and higher versions.

```
SELECT postGIS_extensions_upgrade();
```

If your application doesn't support the latest PostGIS version, you can install an older version of PostGIS that's available in your major version as follows.

```
CREATE EXTENSION postgis VERSION "2.5.5";
```

If you want to upgrade to a specific PostGIS version from an older version, you can also use the following command.

```
ALTER EXTENSION postgis UPDATE TO "2.5.5";
```

Depending on the version that you're upgrading from, you might need to use this function again. The result of the first run of the function determines if an additional upgrade function is needed.

For example, this is the case for upgrading from PostGIS 2 to PostGIS 3. For more information, see Upgrading PostGIS 2 to PostGIS 3.

If you upgraded this extension to prepare for a major version upgrade of the PostgreSQL engine, you can continue with other preliminary tasks. For more information, see Testing an upgrade of your production DB cluster to a new major version.

PostGIS extension versions

We recommend that you install the versions of all extensions such as PostGIS as listed in Extension versions for Aurora PostgreSQL-Compatible Edition in the *Release Notes for Aurora PostgreSQL*. To get a list of versions that are available in your release, use the following command.

```
SELECT * FROM pg_available_extension_versions WHERE name='postgis';
```

You can find version information in the following sections in the *Release Notes for Aurora PostgreSQL*:

- Extension versions for Aurora PostgreSQL 14
- Extension versions for Aurora PostgreSQL-Compatible Edition 13
- Extension versions for Aurora PostgreSQL-Compatible Edition 12
- Extension versions for Aurora PostgreSQL-Compatible Edition 11
- Extension versions for Aurora PostgreSQL-Compatible Edition 10
- Extension versions for Aurora PostgreSQL-Compatible Edition 9.6

Upgrading PostGIS 2 to PostGIS 3

Starting with version 3.0, the PostGIS raster functionality is now a separate extension, `postgis_raster`. This extension has its own installation and upgrade path. This removes dozens of functions, data types, and other artifacts required for raster image processing from the core `postgis` extension. That means that if your use case doesn't require raster processing, you don't need to install the `postgis_raster` extension.

In the following upgrade example, the first upgrade command extracts raster functionality into the `postgis_raster` extension. A second upgrade command is then required to upgrade `postgis_raster` to the new version.

To upgrade from PostGIS 2 to PostGIS 3

1. Identify the default version of PostGIS that's available to the PostgreSQL version on your Aurora PostgreSQL DB cluster. To do so, run the following query.

```
SELECT * FROM pg_available_extensions
    WHERE default_version > installed_version;
  name   | default_version | installed_version |                          comment
---------+-----------------+-------------------
+-------------------------------------------------------------
 postgis | 3.1.4           | 2.3.7             | PostGIS geometry and geography
 spatial types and functions
(1 row)
```

2. Identify the versions of PostGIS installed in each database on the writer instance of your Aurora PostgreSQL DB cluster. In other words, query each user database as follows.

```
SELECT
    e.extname AS "Name",
    e.extversion AS "Version",
    n.nspname AS "Schema",
    c.description AS "Description"
FROM
    pg_catalog.pg_extension e
    LEFT JOIN pg_catalog.pg_namespace n ON n.oid = e.extnamespace
    LEFT JOIN pg_catalog.pg_description c ON c.objoid = e.oid
    AND c.classoid = 'pg_catalog.pg_extension'::pg_catalog.regclass
WHERE
    e.extname LIKE '%postgis%'
ORDER BY
    1;
  Name   | Version | Schema |                              Description
---------+---------+--------
+-----------------------------------------------------------------------
 postgis | 2.3.7   | public | PostGIS geometry, geography, and raster spatial types
 and functions
(1 row)
```

This mismatch between the default version (PostGIS 3.1.4) and the installed version (PostGIS 2.3.7) means that you need to upgrade the PostGIS extension.

```
ALTER EXTENSION postgis UPDATE;
```

```
ALTER EXTENSION
WARNING: unpackaging raster
WARNING: PostGIS Raster functionality has been unpackaged
```

3. Run the following query to verify that the raster functionality is now in its own package.

```
SELECT
    probin,
    count(*)
FROM
    pg_proc
WHERE
    probin LIKE '%postgis%'
GROUP BY
    probin;
          probin          | count
--------------------------+-------
 $libdir/rtpostgis-2.3    | 107
 $libdir/postgis-3        | 487
(2 rows)
```

The output shows that there's still a difference between versions. The PostGIS functions are version 3 (postgis-3), while the raster functions (rtpostgis) are version 2 (rtpostgis-2.3). To complete the upgrade, you run the upgrade command again, as follows.

```
postgres=> SELECT postgis_extensions_upgrade();
```

You can safely ignore the warning messages. Run the following query again to verify that the upgrade is complete. The upgrade is complete when PostGIS and all related extensions aren't marked as needing upgrade.

```
SELECT postgis_full_version();
```

4. Use the following query to see the completed upgrade process and the separately packaged extensions, and verify that their versions match.

```
SELECT
    e.extname AS "Name",
    e.extversion AS "Version",
    n.nspname AS "Schema",
    c.description AS "Description"
```

```
FROM
    pg_catalog.pg_extension e
    LEFT JOIN pg_catalog.pg_namespace n ON n.oid = e.extnamespace
    LEFT JOIN pg_catalog.pg_description c ON c.objoid = e.oid
        AND c.classoid = 'pg_catalog.pg_extension'::pg_catalog.regclass
WHERE
    e.extname LIKE '%postgis%'
ORDER BY
    1;
      Name      | Version | Schema |                            Description
----------------+---------+--------
+------------------------------------------------------------------------
 postgis        | 3.1.5   | public | PostGIS geometry, geography, and raster
 spatial types and functions
 postgis_raster | 3.1.5   | public | PostGIS raster types and functions
(2 rows)
```

The output shows that the PostGIS 2 extension was upgraded to PostGIS 3, and both `postgis` and the now separate `postgis_raster` extension are version 3.1.5.

After this upgrade completes, if you don't plan to use the raster functionality, you can drop the extension as follows.

```
DROP EXTENSION postgis_raster;
```

Managing PostgreSQL partitions with the pg_partman extension

PostgreSQL table partitioning provides a framework for high-performance handling of data input and reporting. Use partitioning for databases that require very fast input of large amounts of data. Partitioning also provides for faster queries of large tables. Partitioning helps maintain data without impacting the database instance because it requires fewer I/O resources.

By using partitioning, you can split data into custom-sized chunks for processing. For example, you can partition time-series data for ranges such as hourly, daily, weekly, monthly, quarterly, yearly, custom, or any combination of these. For a time-series data example, if you partition the table by hour, each partition contains one hour of data. If you partition the time-series table by day, the partitions holds one day's worth of data, and so on. The partition key controls the size of a partition.

When you use an `INSERT` or `UPDATE` SQL command on a partitioned table, the database engine routes the data to the appropriate partition. PostgreSQL table partitions that store the data are child tables of the main table.

During database query reads, the PostgreSQL optimizer examines the `WHERE` clause of the query and, if possible, directs the database scan to only the relevant partitions.

Starting with version 10, PostgreSQL uses declarative partitioning to implement table partitioning. This is also known as native PostgreSQL partitioning. Before PostgreSQL version 10, you used triggers to implement partitions.

PostgreSQL table partitioning provides the following features:

- Creation of new partitions at any time.
- Variable partition ranges.
- Detachable and reattachable partitions using data definition language (DDL) statements.

  For example, detachable partitions are useful for removing historical data from the main partition but keeping historical data for analysis.
- New partitions inherit the parent database table properties, including the following:
  - Indexes
  - Primary keys, which must include the partition key column
  - Foreign keys
  - Check constraints
  - References
- Creating indexes for the full table or each specific partition.

You can't alter the schema for an individual partition. However, you can alter the parent table (such as adding a new column), which propagates to partitions.

Topics

- Overview of the PostgreSQL pg_partman extension
- Enabling the pg_partman extension
- Configuring partitions using the create_parent function
- Configuring partition maintenance using the run_maintenance_proc function

Overview of the PostgreSQL pg_partman extension

You can use the PostgreSQL pg_partman extension to automate the creation and maintenance of table partitions. For more general information, see PG Partition Manager in the pg_partman documentation.

> **Note**
>
> The pg_partman extension is supported on Aurora PostgreSQL versions 12.6 and higher.

Instead of having to manually create each partition, you configure pg_partman with the following settings:

- Table to be partitioned
- Partition type
- Partition key
- Partition granularity
- Partition precreation and management options

After you create a PostgreSQL partitioned table, you register it with pg_partman by calling the create_parent function. Doing this creates the necessary partitions based on the parameters you pass to the function.

The pg_partman extension also provides the run_maintenance_proc function, which you can call on a scheduled basis to automatically manage partitions. To ensure that the proper partitions are created as needed, schedule this function to run periodically (such as hourly). You can also ensure that partitions are automatically dropped.

Enabling the pg_partman extension

If you have multiple databases inside the same PostgreSQL DB instance for which you want to manage partitions, enable the pg_partman extension separately for each database. To enable the pg_partman extension for a specific database, create the partition maintenance schema and then create the pg_partman extension as follows.

```
CREATE SCHEMA partman;
CREATE EXTENSION pg_partman WITH SCHEMA partman;
```

> **Note**
>
> To create the pg_partman extension, make sure that you have rds_superuser privileges.

If you receive an error such as the following, grant the rds_superuser privileges to the account or use your superuser account.

```
ERROR: permission denied to create extension "pg_partman"
HINT: Must be superuser to create this extension.
```

To grant rds_superuser privileges, connect with your superuser account and run the following command.

```
GRANT rds_superuser TO user-or-role;
```

For the examples that show using the pg_partman extension, we use the following sample database table and partition. This database uses a partitioned table based on a timestamp. A schema data_mart contains a table named events with a column named created_at. The following settings are included in the events table:

- Primary keys event_id and created_at, which must have the column used to guide the partition.
- A check constraint ck_valid_operation to enforce values for an operation table column.
- Two foreign keys, where one (fk_orga_membership) points to the external table organization and the other (fk_parent_event_id) is a self-referenced foreign key.
- Two indexes, where one (idx_org_id) is for the foreign key and the other (idx_event_type) is for the event type.

The following DDL statements create these objects, which are automatically included on each partition.

```
CREATE SCHEMA data_mart;
CREATE TABLE data_mart.organization ( org_id BIGSERIAL,
        org_name TEXT,
        CONSTRAINT pk_organization PRIMARY KEY (org_id)
    );
```

```
CREATE TABLE data_mart.events(
        event_id        BIGSERIAL,
        operation       CHAR(1),
        value           FLOAT(24),
        parent_event_id BIGINT,
        event_type      VARCHAR(25),
        org_id          BIGSERIAL,
        created_at      timestamp,
        CONSTRAINT pk_data_mart_event PRIMARY KEY (event_id, created_at),
        CONSTRAINT ck_valid_operation CHECK (operation = 'C' OR operation = 'D'),
        CONSTRAINT fk_orga_membership
            FOREIGN KEY(org_id)
            REFERENCES data_mart.organization (org_id),
        CONSTRAINT fk_parent_event_id
            FOREIGN KEY(parent_event_id, created_at)
            REFERENCES data_mart.events (event_id,created_at)
    ) PARTITION BY RANGE (created_at);

CREATE INDEX idx_org_id     ON  data_mart.events(org_id);
CREATE INDEX idx_event_type ON  data_mart.events(event_type);
```

Configuring partitions using the create_parent function

After you enable the pg_partman extension, use the `create_parent` function to configure partitions inside the partition maintenance schema. The following example uses the `events` table example created in Enabling the pg_partman extension. Call the `create_parent` function as follows.

```
SELECT partman.create_parent(
 p_parent_table => 'data_mart.events',
 p_control      => 'created_at',
 p_type         => 'range',
 p_interval     => '1 day',
 p_premake      => 30);
```

The parameters are as follows:

- `p_parent_table` – The parent partitioned table. This table must already exist and be fully qualified, including the schema.
- `p_control` – The column on which the partitioning is to be based. The data type must be an integer or time-based.

- `p_type` – The type is either `'range'` or `'list'`.
- `p_interval` – The time interval or integer range for each partition. Example values include `1 day`, `1 hour`, and so on.
- `p_premake` – The number of partitions to create in advance to support new inserts.

For a complete description of the `create_parent` function, see Creation Functions in the `pg_partman` documentation.

Configuring partition maintenance using the run_maintenance_proc function

You can run partition maintenance operations to automatically create new partitions, detach partitions, or remove old partitions. Partition maintenance relies on the `run_maintenance_proc` function of the `pg_partman` extension and the `pg_cron` extension, which initiates an internal scheduler. The `pg_cron` scheduler automatically executes SQL statements, functions, and procedures defined in your databases.

The following example uses the `events` table example created in Enabling the pg_partman extension to set partition maintenance operations to run automatically. As a prerequisite, add `pg_cron` to the `shared_preload_libraries` parameter in the DB instance's parameter group.

```
CREATE EXTENSION pg_cron;

UPDATE partman.part_config
SET infinite_time_partitions = true,
    retention = '3 months',
    retention_keep_table=true
WHERE parent_table = 'data_mart.events';
SELECT cron.schedule('@hourly', $$CALL partman.run_maintenance_proc()$$);
```

Following, you can find a step-by-step explanation of the preceding example:

1. Modify the parameter group associated with your DB instance and add `pg_cron` to the `shared_preload_libraries` parameter value. This change requires a DB instance restart for it to take effect. For more information, see Modifying parameters in a DB parameter group in Amazon Aurora.
2. Run the command `CREATE EXTENSION pg_cron;` using an account that has the `rds_superuser` permissions. Doing this enables the `pg_cron` extension. For more information, see Scheduling maintenance with the PostgreSQL pg_cron extension.

3. Run the command `UPDATE partman.part_config` to adjust the pg_partman settings for the `data_mart.events` table.
4. Run the command `SET . . .` to configure the `data_mart.events` table, with these clauses:
   a. `infinite_time_partitions = true,` – Configures the table to be able to automatically create new partitions without any limit.
   b. `retention = '3 months',` – Configures the table to have a maximum retention of three months.
   c. `retention_keep_table=true` – Configures the table so that when the retention period is due, the table isn't deleted automatically. Instead, partitions that are older than the retention period are only detached from the parent table.
5. Run the command `SELECT cron.schedule . . .` to make a pg_cron function call. This call defines how often the scheduler runs the pg_partman maintenance procedure, `partman.run_maintenance_proc`. For this example, the procedure runs every hour.

For a complete description of the `run_maintenance_proc` function, see Maintenance Functions in the pg_partman documentation.

Scheduling maintenance with the PostgreSQL pg_cron extension

You can use the PostgreSQL pg_cron extension to schedule maintenance commands within a PostgreSQL database. For more information about the extension, see What is pg_cron? in the pg_cron documentation.

The pg_cron extension is supported on Aurora PostgreSQL engine versions 12.6 and higher version

To learn more about using pg_cron, see Schedule jobs with pg_cron on your RDS for PostgreSQL or your Aurora PostgreSQL-Compatible Edition databases.

> **Note**
>
> The pg_cron extension version is displayed as a two digit version, for example, 1.6, in the pg_available_extensions view. While you might see three digit versions, for example, 1.6.4 or 1.6.5, listed in some contexts, you must specify the two digit version when performing an extension upgrade.

Topics

- Setting up the pg_cron extension
- Granting database users permissions to use pg_cron
- Scheduling pg_cron jobs
- Reference for the pg_cron extension

Setting up the pg_cron extension

Set up the `pg_cron` extension as follows:

1. Modify the custom parameter group associated with your PostgreSQL DB instance by adding `pg_cron` to the `shared_preload_libraries` parameter value.

   Restart the PostgreSQL DB instance to have changes to the parameter group take effect. To learn more about working with parameter groups, see Amazon Aurora PostgreSQL parameters.
2. After the PostgreSQL DB instance has restarted, run the following command using an account that has `rds_superuser` permissions. For example, if you used the default settings when you created your Aurora PostgreSQL DB cluster, connect as user `postgres` and create the extension.

   ```
   CREATE EXTENSION pg_cron;
   ```

   The `pg_cron` scheduler is set in the default PostgreSQL database named `postgres`. The `pg_cron` objects are created in this `postgres` database and all scheduling actions run in this database.
3. You can use the default settings, or you can schedule jobs to run in other databases within your PostgreSQL DB instance. To schedule jobs for other databases within your PostgreSQL DB instance, see the example in Scheduling a cron job for a database other than the default database.

Granting database users permissions to use pg_cron

Installing the `pg_cron` extension requires the `rds_superuser` privileges. However, permissions to use the `pg_cron` can be granted (by a member of the `rds_superuser` group/role) to other database users, so that they can schedule their own jobs. We recommend that you grant permissions to the `cron` schema only as needed if it improves operations in your production environment.

To grant a database user permission in the `cron` schema, run the following command:

```
postgres=> GRANT USAGE ON SCHEMA cron TO db-user;
```

This gives *db-user* permission to access the `cron` schema to schedule cron jobs for the objects that they have permissions to access. If the database user doesn't have permissions, the job fails after posting the error message to the `postgresql.log` file, as shown in the following:

```
2020-12-08 16:41:00 UTC::@:[30647]:ERROR: permission denied for table table-name
2020-12-08 16:41:00 UTC::@:[27071]:LOG: background worker "pg_cron" (PID 30647) exited
 with exit code 1
```

In other words, make sure that database users that are granted permissions on the `cron` schema also have permissions on the objects (tables, schemas, and so on) that they plan to schedule.

The details of the cron job and its success or failure are also captured in the `cron.job_run_details` table. For more information, see Tables for scheduling jobs and capturing status.

Scheduling pg_cron jobs

The following sections show how you can schedule various management tasks using `pg_cron` jobs.

> **Note**
>
> When you create `pg_cron` jobs, check that the `max_worker_processes` setting is larger than the number of `cron.max_running_jobs`. A `pg_cron` job fails if it runs out of background worker processes. The default number of `pg_cron` jobs is 5. For more information, see Parameters for managing the pg_cron extension.

Topics

- Vacuuming a table
- Purging the pg_cron history table
- Logging errors to the postgresql.log file only
- Scheduling a cron job for a database other than the default database

Vacuuming a table

Autovacuum handles vacuum maintenance for most cases. However, you might want to schedule a vacuum of a specific table at a time of your choosing.

Following is an example of using the `cron.schedule` function to set up a job to use `VACUUM FREEZE` on a specific table every day at 22:00 (GMT).

```
SELECT cron.schedule('manual vacuum', '0 22 * * *', 'VACUUM FREEZE pgbench_accounts');
 schedule
----------
1
(1 row)
```

After the preceding example runs, you can check the history in the `cron.job_run_details` table as follows.

```
postgres=> SELECT * FROM cron.job_run_details;
jobid  | runid | job_pid | database | username | command                        |
 status    | return_message | start_time                    | end_time
-------+-------+---------+----------+----------+--------------------------------
+-----------+---------------+------------------------------
+-------------------------------
 1     | 1     | 3395    | postgres | adminuser| vacuum freeze pgbench_accounts
 | succeeded | VACUUM         | 2020-12-04 21:10:00.050386+00 | 2020-12-04
 21:10:00.072028+00
(1 row)
```

Following is a query of the `cron.job_run_details` table to see the failed jobs.

```
postgres=> SELECT * FROM cron.job_run_details WHERE status = 'failed';
jobid | runid | job_pid | database | username | command                        | status
 | return_message                                | start_time                    |
 end_time
------+-------+---------+----------+----------+--------------------------------+--------
+-----------------------------------------------+-------------------------------
+-------------------------------
 5    | 4     | 30339   | postgres | adminuser| vacuum freeze pgbench_account | failed
 | ERROR: relation "pgbench_account" does not exist | 2020-12-04 21:48:00.015145+00 |
 2020-12-04 21:48:00.029567+00
(1 row)
```

For more information, see Tables for scheduling jobs and capturing status.

Purging the pg_cron history table

The `cron.job_run_details` table contains a history of cron jobs that can become very large over time. We recommend that you schedule a job that purges this table. For example, keeping a week's worth of entries might be sufficient for troubleshooting purposes.

The following example uses the cron.schedule function to schedule a job that runs every day at midnight to purge the `cron.job_run_details` table. The job keeps only the last seven days. Use your `rds_superuser` account to schedule the job such as the following.

```
SELECT cron.schedule('0 0 * * *', $$DELETE
    FROM cron.job_run_details
    WHERE end_time < now() - interval '7 days'$$);
```

For more information, see Tables for scheduling jobs and capturing status.

Logging errors to the postgresql.log file only

To prevent writing to the `cron.job_run_details` table, modify the parameter group associated with the PostgreSQL DB instance and set the `cron.log_run` parameter to off. The `pg_cron` extension no longer writes to the table and captures errors to the `postgresql.log` file only. For more information, see Modifying parameters in a DB parameter group in Amazon Aurora.

Use the following command to check the value of the `cron.log_run` parameter.

```
postgres=> SHOW cron.log_run;
```

For more information, see Parameters for managing the pg_cron extension.

Scheduling a cron job for a database other than the default database

The metadata for `pg_cron` is all held in the PostgreSQL default database named `postgres`. Because background workers are used for running the maintenance cron jobs, you can schedule a job in any of your databases within the PostgreSQL DB instance:

> **Note**
>
> Only users with `rds_superuser` role or `rds_superuser` privileges can list all cron jobs in the database. Other users can view only their own jobs in the `cron.job` table.

Use the `cron.schedule_in_database` function to schedule a job that runs in another database within your PostgreSQL DB instance in a single step. This avoids the metadata database running the job before you reassign it. This function is available in `pg_cron` 1.4.0 and higher.

1. If you have the `rds_superuser` role, schedule the job directly in the target database by passing the database name as the final argument to `cron.schedule_in_database`.

```
postgres=> SELECT cron.schedule_in_database('database1 manual vacuum', '29 03 * * *',
 'vacuum freeze test_table', 'database1');
```

2. Verify by querying the `cron.job` table.

```
postgres=> SELECT * FROM cron.job;
jobid | schedule    | command                         | nodename  | nodeport |
 database | username  | active | jobname
------+-------------+---------------------------------+-----------+----------
+----------+----------+--------+-----------------------
106   | 29 03 * * * | vacuum freeze test_table        | localhost | 8192     |
 database1| adminuser | t      | database1 manual vacuum
  1   | 59 23 * * * | vacuum freeze pgbench_accounts | localhost | 8192     |
 postgres | adminuser | t      | manual vacuum
(2 rows)
```

Reference for the pg_cron extension

You can use the following parameters, functions, and tables with the `pg_cron` extension. For more information, see What is pg_cron? in the pg_cron documentation.

Topics

- Parameters for managing the pg_cron extension
- Function reference: cron.schedule
- Function reference: cron.unschedule
- Tables for scheduling jobs and capturing status

Parameters for managing the pg_cron extension

Following is a list of parameters that control the `pg_cron` extension behavior.

Parameter	Description
cron.database_name	The database in which pg_cron metadata is kept.
cron.host	The hostname to connect to PostgreSQL. You can't modify this value.
cron.log_run	Log every job that runs in the job_run_details table. Values are on or off. For more information, see Tables for scheduling jobs and capturing status.
cron.log_statement	Log all cron statements before running them. Values are on or off.
cron.max_running_jobs	The maximum number of jobs that can run concurrently.
cron.use_background_workers	Use background workers instead of client sessions. You can't modify this value.

Use the following SQL command to display these parameters and their values.

```
postgres=> SELECT name, setting, short_desc FROM pg_settings WHERE name LIKE 'cron.%'
 ORDER BY name;
```

Function reference: cron.schedule

This function schedules a cron job. The job is initially scheduled in the default postgres database. The function returns a bigint value representing the job identifier. To schedule jobs to run in other databases within your PostgreSQL DB instance, see the example in Scheduling a cron job for a database other than the default database.

The function has two syntax formats.

Syntax

```
cron.schedule (job_name,
```

```
    schedule,
    command
);

cron.schedule (schedule,
    command
);
```

Parameters

Parameter	Description
job_name	The name of the cron job.
schedule	Text indicating the schedule for the cron job. The format is the standard cron format.
command	Text of the command to run.

Examples

```
postgres=> SELECT cron.schedule ('test','0 10 * * *', 'VACUUM pgbench_history');
 schedule
----------
      145
(1 row)

postgres=> SELECT cron.schedule ('0 15 * * *', 'VACUUM pgbench_accounts');
 schedule
----------
      146
(1 row)
```

Function reference: cron.unschedule

This function deletes a cron job. You can specify either the `job_name` or the `job_id`. A policy makes sure that you are the owner to remove the schedule for the job. The function returns a Boolean indicating success or failure.

The function has the following syntax formats.

Syntax

```
cron.unschedule (job_id);

cron.unschedule (job_name);
```

Parameters

Parameter	Description
job_id	A job identifier that was returned from the cron.schedule function when the cron job was scheduled.
job_name	The name of a cron job that was scheduled with the cron.schedule function.

Examples

```
postgres=> SELECT cron.unschedule(108);
 unschedule
------------
 t
(1 row)

postgres=> SELECT cron.unschedule('test');
 unschedule
------------
 t
(1 row)
```

Tables for scheduling jobs and capturing status

The following tables are used to schedule the cron jobs and record how the jobs completed.

Table	Description
`cron.job`	Contains the metadata about each scheduled job. Most interactions with this table should be done by using the `cron.schedule` and `cron.unschedule` functions. **Important** We recommend that you don't give update or insert privileges directly to this table. Doing so would allow the user to update the `username` column to run as `rds-superuser` .
`cron.job_run_details`	Contains historic information about past scheduled jobs that ran. This is useful to investigate the status, return messages, and start and end time from the job that ran. **Note** To prevent this table from growing indefinitely, purge it on a regular basis. For an example, see Purging the pg_cron history table.

Using pgAudit to log database activity

Financial institutions, government agencies, and many industries need to keep *audit logs* to meet regulatory requirements. By using the PostgreSQL Audit extension (pgAudit) with your Aurora PostgreSQL DB cluster, you can capture the detailed records that are typically needed by auditors or to meet regulatory requirements. For example, you can set up the pgAudit extension to track changes made to specific databases and tables, to record the user who made the change, and many other details.

The pgAudit extension builds on the functionality of the native PostgreSQL logging infrastructure by extending the log messages with more detail. In other words, you use the same approach to view your audit log as you do to view any log messages. For more information about PostgreSQL logging, see Aurora PostgreSQL database log files.

The pgAudit extension redacts sensitive data such as cleartext passwords from the logs. If your Aurora PostgreSQL DB cluster is configured to log data manipulation language (DML) statements as detailed in Turning on query logging for your Aurora PostgreSQL DB cluster , you can avoid the cleartext password issue by using the PostgreSQL Audit extension.

You can configure auditing on your database instances with a great degree of specificity. You can audit all databases and all users. Or, you can choose to audit only certain databases, users, and other objects. You can also explicitly exclude certain users and databases from being audited. For more information, see Excluding users or databases from audit logging.

Given the amount of detail that can be captured, we recommend that if you do use pgAudit, you monitor your storage consumption.

The pgAudit extension is supported on all available Aurora PostgreSQL versions. For a list of pgAudit versions supported by Aurora PostgreSQL version, see Extension versions for Amazon Aurora PostgreSQL in the *Release Notes for Aurora PostgreSQL*.

Topics

- Setting up the pgAudit extension
- Auditing database objects
- Excluding users or databases from audit logging
- Reference for the pgAudit extension

Setting up the pgAudit extension

To set up the pgAudit extension on your Aurora PostgreSQL DB cluster, you first add pgAudit to the shared libraries on the custom DB cluster parameter group for your Aurora PostgreSQL DB cluster. For information about creating a custom DB cluster parameter group, see Parameter groups for Amazon Aurora. Next, you install the pgAudit extension. Finally, you specify the databases and objects that you want to audit. The procedures in this section show you how. You can use the Amazon Web Services Management Console or the Amazon CLI.


You must have permissions as the `rds_superuser` role to perform all these tasks.

The steps following assume that your Aurora PostgreSQL DB cluster is associated with a custom DB cluster parameter group.

Console

To set up the pgAudit extension

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose your Aurora PostgreSQL DB cluster's Writer instance .
3. Open the **Configuration** tab for your Aurora PostgreSQL DB cluster writer instance. Among the Instance details, find the **Parameter group** link.
4. Choose the link to open the custom parameters associated with your Aurora PostgreSQL DB cluster.
5. In the **Parameters** search field, type `shared_pre` to find the `shared_preload_libraries` parameter.
6. Choose **Edit parameters** to access the property values.
7. Add `pgaudit` to the list in the **Values** field. Use a comma to separate items in the list of values.

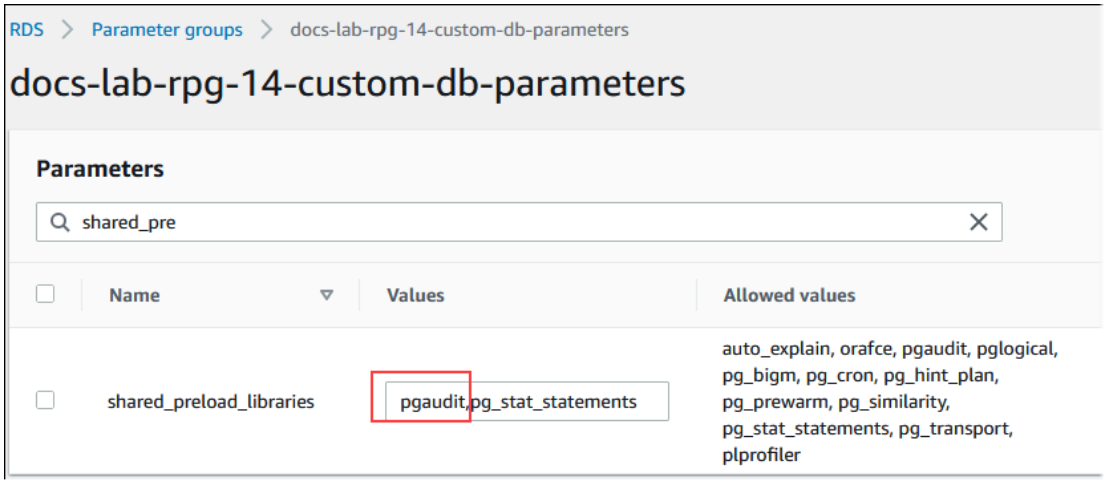

8. Reboot the writer instance of your Aurora PostgreSQL DB cluster so that your change to the `shared_preload_libraries` parameter takes effect.
9. When the instance is available, verify that pgAudit has been initialized. Use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster, and then run the following command.

```
SHOW shared_preload_libraries;
shared_preload_libraries
--------------------------
```

```
rdsutils,pgaudit
(1 row)
```

10. With pgAudit initialized, you can now create the extension. You need to create the extension after initializing the library because the `pgaudit` extension installs event triggers for auditing data definition language (DDL) statements.

```
CREATE EXTENSION pgaudit;
```

11. Close the `psql` session.

```
labdb=> \q
```

12. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
13. Find the `pgaudit.log` parameter in the list and set to the appropriate value for your use case. For example, setting the `pgaudit.log` parameter to `write` as shown in the following image captures inserts, updates, deletes, and some other types changes to the log.



You can also choose one of the following values for the `pgaudit.log` parameter.

- none – This is the default. No database changes are logged.
- all – Logs everything (read, write, function, role, ddl, misc).
- ddl – Logs all data definition language (DDL) statements that aren't included in the `ROLE` class.
- function – Logs function calls and `DO` blocks.
- misc – Logs miscellaneous commands, such as `DISCARD`, `FETCH`, `CHECKPOINT`, `VACUUM`, and `SET`.

- read – Logs SELECT and COPY when the source is a relation (such as a table) or a query.
- role – Logs statements related to roles and privileges, such as GRANT, REVOKE, CREATE ROLE, ALTER ROLE, and DROP ROLE.
- write – Logs INSERT, UPDATE, DELETE, TRUNCATE, and COPY when the destination is a relation (table).

14. Choose **Save changes**.

Amazon CLI

To setup pgAudit

To setup pgAudit using the Amazon CLI, you call the modify-db-parameter-group operation to modify the audit log parameters in your custom parameter group, as shown in the following procedure.

1. Use the following Amazon CLI command to add pgaudit to the shared_preload_libraries parameter.

```
aws rds modify-db-parameter-group \
   --db-parameter-group-name custom-param-group-name \
   --parameters
 "ParameterName=shared_preload_libraries,ParameterValue=pgaudit,ApplyMethod=pending-
reboot" \
   --region aws-region
```

2. Use the following Amazon CLI command to reboot the writer instance of your Aurora PostgreSQL DB cluster so that the pgaudit library is initialized.

```
aws rds reboot-db-instance \
    --db-instance-identifier writer-instance \
    --region aws-region
```

3. When the instance is available, you can verify that pgaudit has been initialized. Use psql to connect to the writer instance of your Aurora PostgreSQL DB cluster, and then run the following command.

```
SHOW shared_preload_libraries;
shared_preload_libraries
-------------------------
```

```
rdsutils,pgaudit
(1 row)
```

With pgAudit initialized, you can now create the extension.

```
CREATE EXTENSION pgaudit;
```

4. Close the `psql` session so that you can use the Amazon CLI.

```
labdb=> \q
```

5. Use the following Amazon CLI command to specify the classes of statement that want logged by session audit logging. The example sets the `pgaudit.log` parameter to `write`, which captures inserts, updates, and deletes to the log.

```
aws rds modify-db-parameter-group \
   --db-parameter-group-name custom-param-group-name \
   --parameters
 "ParameterName=pgaudit.log,ParameterValue=write,ApplyMethod=pending-reboot" \
   --region aws-region
```

You can also choose one of the following values for the `pgaudit.log` parameter.

- none – This is the default. No database changes are logged.
- all – Logs everything (read, write, function, role, ddl, misc).
- ddl – Logs all data definition language (DDL) statements that aren't included in the `ROLE` class.
- function – Logs function calls and `DO` blocks.
- misc – Logs miscellaneous commands, such as `DISCARD`, `FETCH`, `CHECKPOINT`, `VACUUM`, and `SET`.
- read – Logs `SELECT` and `COPY` when the source is a relation (such as a table) or a query.
- role – Logs statements related to roles and privileges, such as `GRANT`, `REVOKE`, `CREATE ROLE`, `ALTER ROLE`, and `DROP ROLE`.
- write – Logs `INSERT`, `UPDATE`, `DELETE`, `TRUNCATE`, and `COPY` when the destination is a relation (table).

Reboot the writer instance of your Aurora PostgreSQL DB cluster using the following Amazon CLI command.


```
aws rds reboot-db-instance \
    --db-instance-identifier writer-instance \
    --region aws-region
```

Auditing database objects

With pgAudit set up on your Aurora PostgreSQL DB cluster and configured for your requirements, more detailed information is captured in the PostgreSQL log. For example, while the default PostgreSQL logging configuration identifies the date and time that a change was made in a database table, with the pgAudit extension the log entry can include the schema, user who made the change, and other details depending on how the extension parameters are configured. You can set up auditing to track changes in the following ways.

- For each session, by user. For the session level, you can capture the fully qualified command text.
- For each object, by user and by database.

The object auditing capability is activated when you create the `rds_pgaudit` role on your system and then add this role to the `pgaudit.role` parameter in your custom parameter parameter group. By default, the `pgaudit.role` parameter is unset and the only allowable value is `rds_pgaudit`. The following steps assume that `pgaudit` has been initialized and that you have created the `pgaudit` extension by following the procedure in Setting up the pgAudit extension.

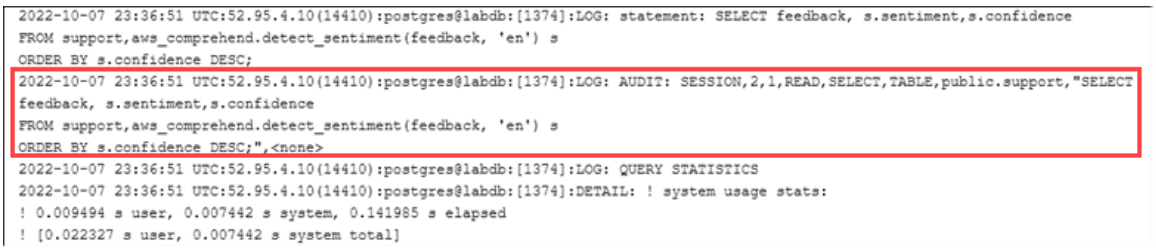

As shown in this example, the "LOG: AUDIT: SESSION" line provides information about the table and its schema, among other details.

To set up object auditing

1. Use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster.

```
psql --host=your-instance-name.aws-region.rds.amazonaws.com --port=5432 --
username=postgrespostgres --password --dbname=labdb
```

2. Create a database role named `rds_pgaudit` using the following command.

```
labdb=> CREATE ROLE rds_pgaudit;
CREATE ROLE
labdb=>
```

3. Close the `psql` session.

```
labdb=> \q
```

   In the next few steps, use the Amazon CLI to modify the audit log parameters in your custom parameter group.

4. Use the following Amazon CLI command to set the `pgaudit.role` parameter to `rds_pgaudit`. By default, this parameter is empty, and `rds_pgaudit` is the only allowable value.

```
aws rds modify-db-parameter-group \
   --db-parameter-group-name custom-param-group-name \
   --parameters
 "ParameterName=pgaudit.role,ParameterValue=rds_pgaudit,ApplyMethod=pending-reboot"
 \
   --region aws-region
```

5. Use the following Amazon CLI command to reboot the writer instance of your Aurora PostgreSQL DB cluster so that your changes to the parameters take effect.

```
aws rds reboot-db-instance \
    --db-instance-identifier writer-instance \
    --region aws-region
```

6. Run the following command to confirm that the `pgaudit.role` is set to `rds_pgaudit`.

```
SHOW pgaudit.role;
pgaudit.role
```

```
------------------
rds_pgaudit
```

To test pgAudit logging, you can run several example commands that you want to audit. For example, you might run the following commands.

```
CREATE TABLE t1 (id int);
GRANT SELECT ON t1 TO rds_pgaudit;
SELECT * FROM t1;
id
----
(0 rows)
```

The database logs should contain an entry similar to the following.

```
...
2017-06-12 19:09:49 UTC:...:rds_test@postgres:[11701]:LOG: AUDIT:
OBJECT,1,1,READ,SELECT,TABLE,public.t1,select * from t1;
...
```

For information on viewing the logs, see Monitoring Amazon Aurora log files.

To learn more about the pgAudit extension, see pgAudit on GitHub.

Excluding users or databases from audit logging

As discussed in Aurora PostgreSQL database log files, PostgreSQL logs consume storage space. Using the pgAudit extension adds to the volume of data gathered in your logs to varying degrees, depending on the changes that you track. You might not need to audit every user or database in your Aurora PostgreSQL DB cluster.

To minimize impacts to your storage and to avoid needlessly capturing audit records, you can exclude users and databases from being audited. You can also change logging within a given session. The following examples show you how.

> **Note**
>
> Parameter settings at the session level take precedence over the settings in the custom DB cluster parameter group for the Aurora PostgreSQL DB cluster's writer instance. If you don't

want database users to bypass your audit logging configuration settings, be sure to change their permissions.

Suppose that your Aurora PostgreSQL DB cluster is configured to audit the same level of activity for all users and databases. You then decide that you don't want to audit the user `myuser`. You can turn off auditing for `myuser` with the following SQL command.

```
ALTER USER myuser SET pgaudit.log TO 'NONE';
```

Then, you can use the following query to check the `user_specific_settings` column for `pgaudit.log` to confirm that the parameter is set to `NONE`.

```
SELECT
    usename AS user_name,
    useconfig AS user_specific_settings
FROM
    pg_user
WHERE
    usename = 'myuser';
```

You see output such as the following.

```
 user_name | user_specific_settings
-----------+-----------------------
 myuser    | {pgaudit.log=NONE}
(1 row)
```

You can turn off logging for a given user in the midst of their session with the database with the following command.

```
ALTER USER myuser IN DATABASE mydatabase SET pgaudit.log TO 'none';
```

Use the following query to check the settings column for pgaudit.log for a specific user and database combination.

```
SELECT
    usename AS "user_name",
    datname AS "database_name",
    pg_catalog.array_to_string(setconfig, E'\n') AS "settings"
```

```
FROM
    pg_catalog.pg_db_role_setting s
    LEFT JOIN pg_catalog.pg_database d ON d.oid = setdatabase
    LEFT JOIN pg_catalog.pg_user r ON r.usesysid = setrole
WHERE
    usename = 'myuser'
    AND datname = 'mydatabase'
ORDER BY
    1,
    2;
```

You see output similar to the following.

```
  user_name | database_name |     settings
-----------+---------------+------------------
 myuser     | mydatabase    | pgaudit.log=none
(1 row)
```

After turning off auditing for `myuser`, you decide that you don't want to track changes to `mydatabase`. You turn off auditing for that specific database by using the following command.

```
ALTER DATABASE mydatabase SET pgaudit.log to 'NONE';
```

Then, use the following query to check the database_specific_settings column to confirm that pgaudit.log is set to NONE.

```
SELECT
a.datname AS database_name,
b.setconfig AS database_specific_settings
FROM
pg_database a
FULL JOIN pg_db_role_setting b ON a.oid = b.setdatabase
WHERE
a.datname = 'mydatabase';
```

You see output such as the following.

```
 database_name | database_specific_settings
---------------+----------------------------
 mydatabase    | {pgaudit.log=NONE}
(1 row)
```

To return settings to the default setting for myuser, use the following command:

```
ALTER USER myuser RESET pgaudit.log;
```

To return settings to their default setting for a database, use the following command.

```
ALTER DATABASE mydatabase RESET pgaudit.log;
```

To reset user and database to the default setting, use the following command.

```
ALTER USER myuser IN DATABASE mydatabase RESET pgaudit.log;
```

You can also capture specific events to the log by setting the `pgaudit.log` to one of the other allowed values for the `pgaudit.log` parameter. For more information, see List of allowable settings for the `pgaudit.log` parameter.

```
ALTER USER myuser SET pgaudit.log TO 'read';
ALTER DATABASE mydatabase SET pgaudit.log TO 'function';
ALTER USER myuser IN DATABASE mydatabase SET pgaudit.log TO 'read,function'
```

Reference for the pgAudit extension

You can specify the level of detail that you want for your audit log by changing one or more of the parameters listed in this section.

Controlling pgAudit behavior

You can control the audit logging by changing one or more of the parameters listed in the following table.

Parameter	Description
`pgaudit.log`	Specifies the statement classes that will be logged by session audit logging. Allowable values include ddl, function, misc, read, role, write, none, all. For more information, see List of allowable settings for the `pgaudit.log` parameter.
`pgaudit.log_catalog`	When turned on (set to 1), adds statements to audit trail if all relations in a statement are in pg_catalog.

Parameter	Description
pgaudit.log_level	Specifies the log level to use for log entries. Allowed values: debug5, debug4, debug3, debug2, debug1, info, notice, warning, log
pgaudit.log_parameter	When turned on (set to 1), parameters passed with the statement are captured in the audit log.
pgaudit.log_relation	When turned on (set to 1), the audit log for the session creates a separate log entry for each relation (TABLE, VIEW, and so on) referenced in a SELECT or DML statement.
pgaudit.log_statement_once	Specifies whether logging will include the statement text and parameters with the first log entry for a statement/substatement combination or with every entry.
pgaudit.role	Specifies the master role to use for object audit logging. The only allowable entry is rds_pgaudit .

List of allowable settings for the pgaudit.log parameter

Value	Description
none	This is the default. No database changes are logged.
all	Logs everything (read, write, function, role, ddl, misc).
ddl	Logs all data definition language (DDL) statements that aren't included in the ROLE class.
function	Logs function calls and DO blocks.
misc	Logs miscellaneous commands, such as DISCARD, FETCH, CHECKPOINT , VACUUM, and SET.
read	Logs SELECT and COPY when the source is a relation (such as a table) or a query.

Value	Description
role	Logs statements related to roles and privileges, such as GRANT, REVOKE, CREATE ROLE, ALTER ROLE, and DROP ROLE.
write	Logs INSERT, UPDATE, DELETE, TRUNCATE, and COPY when the destination is a relation (table).

To log multiple event types with session auditing, use a comma-separated list. To log all event types, set pgaudit.log to ALL. Reboot your DB instance to apply the changes.

With object auditing, you can refine audit logging to work with specific relations. For example, you can specify that you want audit logging for READ operations on one or more tables.

Using pglogical to synchronize data across instances

All currently available Aurora PostgreSQL versions support the pglogical extension. The pglogical extension predates the functionally similar logical replication feature that was introduced by PostgreSQL in version 10. For more information, see Overview of PostgreSQL logical replication with Aurora.

The pglogical extension supports logical replication between two or more Aurora PostgreSQL DB clusters. It also supports replication between different PostgreSQL versions, and between databases running on RDS for PostgreSQL DB instances and Aurora PostgreSQL DB clusters. The pglogical extension uses a publish-subscribe model to replicate changes to tables and other objects, such as sequences, from a publisher to a subscriber. It relies on a replication slot to ensure that changes are synchronized from a publisher node to a subscriber node, defined as follows.

- The *publisher node* is the Aurora PostgreSQL DB cluster that's the source of data to be replicated to other nodes. The publisher node defines the tables to be replicated in a publication set.
- The *subscriber node* is the Aurora PostgreSQL DB cluster that receives WAL updates from the publisher. The subscriber creates a subscription to connect to the publisher and get the decoded WAL data. When the subscriber creates the subscription, the replication slot is created on the publisher node.

Following, you can find information about setting up the pglogical extension.

Topics

- Requirements and limitations for the pglogical extension
- Setting up the pglogical extension
- Setting up logical replication for Aurora PostgreSQL DB cluster
- Reestablishing logical replication after a major upgrade
- Managing logical replication slots for Aurora PostgreSQL
- Parameter reference for the pglogical extension

Requirements and limitations for the pglogical extension

All currently available releases of Aurora PostgreSQL support the `pglogical` extension.

Both the publisher node and the subscriber node must be set up for logical replication.

The tables that you want to replicate from a publisher to a subscriber must have the same names and the same schema. These tables must also contain the same columns, and the columns must use the same data types. Both publisher and subscriber tables must have the same primary keys. We recommend that you use only the PRIMARY KEY as the unique constraint.

The tables on the subscriber node can have more permissive constraints than those on the publisher node for CHECK constraints and NOT NULL constraints.

The `pglogical` extension provides features such as two-way replication that aren't supported by the logical replication feature built into PostgreSQL (version 10 and higher). For more information, see PostgreSQL bi-directional replication using pglogical.

Setting up the pglogical extension

To set up the `pglogical` extension on your Aurora PostgreSQL DB cluster, you add `pglogical` to the shared libraries on the custom DB cluster parameter group for your Aurora PostgreSQL DB cluster. You also need to set the value of the `rds.logical_replication` parameter to 1, to turn on logical decoding. Finally, you create the extension in the database. You can use the Amazon Web Services Management Console or the Amazon CLI for these tasks.


You must have permissions as the `rds_superuser` role to perform these tasks.

The steps following assume that your Aurora PostgreSQL DB cluster is associated with a custom DB cluster parameter group. For information about creating a custom DB cluster parameter group, see Parameter groups for Amazon Aurora.

Console

To set up the pglogical extension

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose your Aurora PostgreSQL DB cluster's Writer instance .
3. Open the **Configuration** tab for your Aurora PostgreSQL DB cluster writer instance. Among the Instance details, find the **Parameter group** link.
4. Choose the link to open the custom parameters associated with your Aurora PostgreSQL DB cluster.
5. In the **Parameters** search field, type `shared_pre` to find the `shared_preload_libraries` parameter.
6. Choose **Edit parameters** to access the property values.
7. Add `pglogical` to the list in the **Values** field. Use a comma to separate items in the list of values.

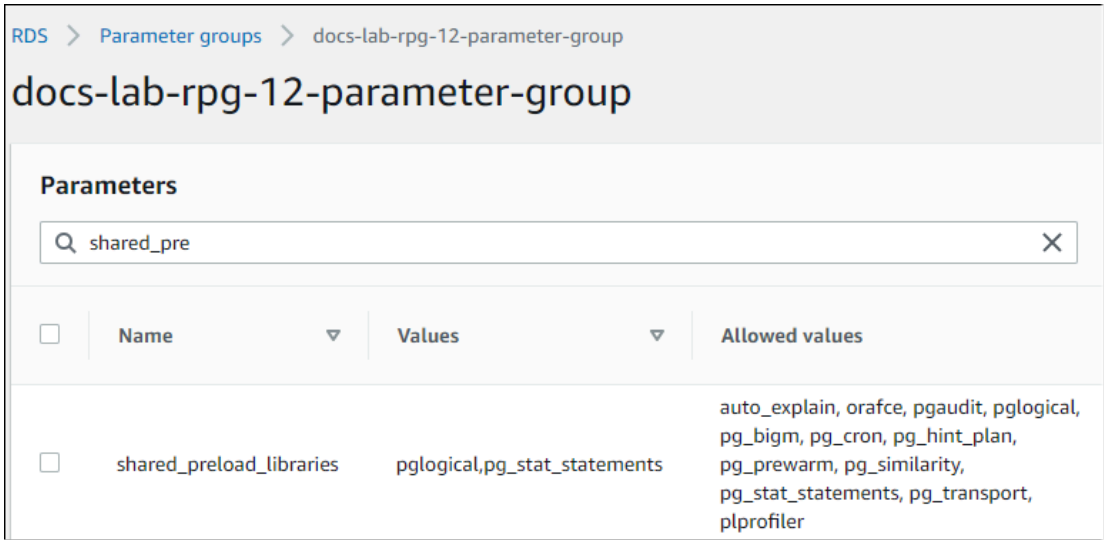

8. Find the `rds.logical_replication` parameter and set it to 1, to turn on logical replication.
9. Reboot the writer instance of your Aurora PostgreSQL DB cluster so that your changes take effect.
10. When the instance is available, you can use `psql` (or pgAdmin) to connect to the writer instance of your Aurora PostgreSQL DB cluster.

```
psql --host=111122223333.aws-region.rds.amazonaws.com --port=5432 --
username=postgres --password --dbname=labdb
```

11. To verify that pglogical is initialized, run the following command.

```
SHOW shared_preload_libraries;
shared_preload_libraries
--------------------------
rdsutils,pglogical
(1 row)
```

12. Verify the setting that enables logical decoding, as follows.

```
SHOW wal_level;
wal_level
-----------
 logical
(1 row)
```

13. Create the extension, as follows.

```
CREATE EXTENSION pglogical;
EXTENSION CREATED
```

14. Choose **Save changes**.
15. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
16. Choose your Aurora PostgreSQL DB cluster's writer instance from the Databases list to select it, and then choose **Reboot** from the Actions menu.

Amazon CLI

To setup the pglogical extension

To setup pglogical using the Amazon CLI, you call the modify-db-parameter-group operation to modify certain parameters in your custom parameter group as shown in the following procedure.

1. Use the following Amazon CLI command to add `pglogical` to the `shared_preload_libraries` parameter.

```
aws rds modify-db-parameter-group \
```

```
   --db-parameter-group-name custom-param-group-name \
   --parameters
 "ParameterName=shared_preload_libraries,ParameterValue=pglogical,ApplyMethod=pending-
reboot" \
   --region aws-region
```

2. Use the following Amazon CLI command to set `rds.logical_replication` to `1` to turn on the logical decoding capability for the writer instance of the Aurora PostgreSQL DB cluster.

```
aws rds modify-db-parameter-group \
   --db-parameter-group-name custom-param-group-name \
   --parameters
 "ParameterName=rds.logical_replication,ParameterValue=1,ApplyMethod=pending-
reboot" \
   --region aws-region
```

3. Use the following Amazon CLI command to reboot the writer instance of your Aurora PostgreSQL DB cluster so that the pglogical library is initialized.

```
aws rds reboot-db-instance \
    --db-instance-identifier writer-instance \
    --region aws-region
```

4. When the instance is available, use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster.

```
psql --host=111122223333.aws-region.rds.amazonaws.com --port=5432 --
username=postgres --password --dbname=labdb
```

5. Create the extension, as follows.

```
CREATE EXTENSION pglogical;
EXTENSION CREATED
```

6. Reboot the writer instance of your Aurora PostgreSQL DB cluster using the following Amazon CLI command.

```
aws rds reboot-db-instance \
    --db-instance-identifier writer-instance \
    --region aws-region
```

Setting up logical replication for Aurora PostgreSQL DB cluster

The following procedure shows you how to start logical replication between two Aurora PostgreSQL DB clusters. The steps assume that both the source (publisher) and the target (subscriber) have the `pglogical` extension set up as detailed in Setting up the pglogical extension.

> **Note**
>
> The node_name of a subscriber node can't start with `rds`.

To create the publisher node and define the tables to replicate

These steps assume that your Aurora PostgreSQL DB cluster has a writer instance with a database that has one or more tables that you want to replicate to another node. You need to recreate the table structure from the publisher on the subscriber, so first, get the table structure if necessary. You can do that by using the `psql` metacommand `\d` *`tablename`* and then creating the same table on the subscriber instance. The following procedure creates an example table on the publisher (source) for demonstration purposes.

1. Use `psql` to connect to the instance that has the table you want to use as a source for subscribers.

   ```
   psql --host=source-instance.aws-region.rds.amazonaws.com --port=5432 --
   username=postgres --password --dbname=labdb
   ```

   If you don't have an existing table that you want to replicate, you can create a sample table as follows.

   a. Create an example table using the following SQL statement.

      ```
      CREATE TABLE docs_lab_table (a int PRIMARY KEY);
      ```

   b. Populate the table with generated data by using the following SQL statement.

      ```
      INSERT INTO docs_lab_table VALUES (generate_series(1,5000));
      INSERT 0 5000
      ```

   c. Verify that data exists in the table by using the following SQL statement.

```
SELECT count(*) FROM docs_lab_table;
```

2. Identify this Aurora PostgreSQL DB cluster as the publisher node, as follows.

```
SELECT pglogical.create_node(
    node_name := 'docs_lab_provider',
    dsn := 'host=source-instance.aws-region.rds.amazonaws.com port=5432
 dbname=labdb');
 create_node
-------------
   3410995529
(1 row)
```

3. Add the table that you want to replicate to the default replication set. For more information about replication sets, see Replication sets in the pglogical documentation.

```
SELECT pglogical.replication_set_add_table('default', 'docs_lab_table', 'true',
 NULL, NULL);
 replication_set_add_table
  ---------------------------
  t
  (1 row)
```

The publisher node setup is complete. You can now set up the subscriber node to receive the updates from the publisher.

To set up the subscriber node and create a subscription to receive updates

These steps assume that the Aurora PostgreSQL DB cluster has been set up with the `pglogical` extension. For more information, see Setting up the pglogical extension.

1. Use `psql` to connect to the instance that you want to receive updates from the publisher.

```
psql --host=target-instance.aws-region.rds.amazonaws.com --port=5432 --
username=postgres --password --dbname=labdb
```

2. On the subscriber Aurora PostgreSQL DB cluster, ,create the same table that exists on the publisher. For this example, the table is `docs_lab_table`. You can create the table as follows.

```
CREATE TABLE docs_lab_table (a int PRIMARY KEY);
```

3. Verify that this table is empty.

```
SELECT count(*) FROM docs_lab_table;
 count
-------
  0
(1 row)
```

4. Identify this Aurora PostgreSQL DB cluster as the subscriber node, as follows.

```
SELECT pglogical.create_node(
    node_name := 'docs_lab_target',
    dsn := 'host=target-instance.aws-region.rds.amazonaws.com port=5432
 sslmode=require dbname=labdb user=postgres password=********');
 create_node
-------------
   2182738256
(1 row)
```

5. Create the subscription.

```
SELECT pglogical.create_subscription(
   subscription_name := 'docs_lab_subscription',
   provider_dsn := 'host=source-instance.aws-region.rds.amazonaws.com port=5432
 sslmode=require dbname=labdb user=postgres password=*******',
   replication_sets := ARRAY['default'],
   synchronize_data := true,
   forward_origins := '{}' );
 create_subscription
---------------------
1038357190
(1 row)
```

When you complete this step, the data from the table on the publisher is created in the table on the subscriber. You can verify that this has occurred by using the following SQL query.

```
SELECT count(*) FROM docs_lab_table;
 count
-------
```

```
  5000
(1 row)
```

From this point forward, changes made to the table on the publisher are replicated to the table on the subscriber.

Reestablishing logical replication after a major upgrade

Whether a major version upgrade keeps your logical replication configuration depends on the PostgreSQL major version that you upgrade from.

Source version earlier than 17 – The upgrade doesn't carry over the replication slots on the publisher node. Before you can perform a major version upgrade of an Aurora PostgreSQL DB cluster that's set up as a publisher node for logical replication, you must drop all replication slots, even those that aren't active. The upgrade precheck stops the upgrade if any logical replication slot exists. Temporarily divert database transactions from the publisher node, drop the replication slots, upgrade the Aurora PostgreSQL DB cluster, and then re-establish and restart replication.

Source version 17 and later – The upgrade can retain the logical replication slots on the publisher node, so you don't have to drop them. Before you start the upgrade, disable the subscriptions and make sure that each subscriber has consumed all changes from its slot. If a slot still holds unconsumed changes, the upgrade fails after the DB cluster has been taken offline, and the DB cluster returns to the source version. The parameter group for the target version must also set `rds.logical_replication` to 1, so that `wal_level` stays `logical`. After the upgrade, enable the subscriptions again. For the full list of requirements, see Upgrade on the PostgreSQL website.

Only the publisher node hosts replication slots. The Aurora PostgreSQL subscriber node has no slots to drop, and you can upgrade it independently of the publisher node. However, the upgrade changes the replication state on the subscriber node in the following ways.

- **pglogical subscriptions** – The upgrade doesn't preserve the replication origin that pglogical uses to track its position, regardless of the source version. After the upgrade, the subscription status is down. Use the following procedure to re-establish replication.
- **Native subscriptions (`CREATE SUBSCRIPTION`)** – For source versions earlier than 17, the upgrade keeps the subscription but doesn't preserve its table list in `pg_subscription_rel` or its replication origin. If you enable the subscription after the upgrade, the apply worker starts and the slot on the publisher node shows as active, but no changes are applied to your tables and no error is logged. To register the tables again, run `ALTER SUBSCRIPTION ... REFRESH`

PUBLICATION. Changes that the publisher node sent while the tables weren't registered are lost. To get a consistent copy, drop and re-create the subscription.

For source version 17 and later, the upgrade preserves the table list and the replication origin. Disable the subscription before the upgrade and enable it afterward. Replication continues from where it stopped without copying the tables again.

The following procedure shows you how to determine that pglogical replication has been disrupted and how to resolve the issue.

Determining that logical replication has been disrupted

You can determine that the replication process has been disrupted by querying either the publisher node or the subscriber node, as follows.

To check the publisher node

- Use `psql` to connect to the publisher node, and then query the `pg_replication_slots` view. Note the value in the `active` column. Normally, this will return `t` (true), showing that replication is active. If the query returns `f` (false), it's an indication that replication to the subscriber has stopped.

```
SELECT slot_name,plugin,slot_type,active FROM pg_replication_slots;
                    slot_name              |      plugin      | slot_type | active
-------------------------------------------+------------------+-----------+--------
 pgl_labdb_docs_labcb4fa94_docs_lab3de412c | pglogical_output | logical   | f
(1 row)
```

To check the subscriber node

On the subscriber node, you can check the status of replication in three different ways.

- Look through the PostgreSQL logs on the subscriber node to find failure messages. The log identifies failure with messages that include exit code 1, as shown following.

```
2022-07-06 16:17:03 UTC::@:[7361]:LOG: background worker "pglogical apply
 16404:2880255011" (PID 14610) exited with exit code 1
2022-07-06 16:19:44 UTC::@:[7361]:LOG: background worker "pglogical apply
 16404:2880255011" (PID 21783) exited with exit code 1
```

- Connect to the database on the subscriber node using `psql` and query the `pg_replication_origin` view, as follows.

```
SELECT * FROM pg_replication_origin;
 roident | roname
---------+--------
(0 rows)
```

  The empty result set means that replication has been disrupted. Normally, you see output such as the following.

```
   roident |                       roname
  ---------+-----------------------------------------------------
         1 | pgl_labdb_docs_labcb4fa94_docs_lab3de412c
  (1 row)
```

- Query the `pglogical.show_subscription_status` function as shown in the following example.

```
SELECT subscription_name,status,slot_name FROM pglogical.show_subscription_status();
     subscription_name | status |              slot_name
---====----------------+--------+-------------------------------------
 docs_lab_subscription | down   | pgl_labdb_docs_labcb4fa94_docs_lab3de412c
(1 row)
```

  This output shows that replication has been disrupted. Its status is `down`. Normally, the output shows the status as `replicating`.

If your logical replication process has been disrupted, you can re-establish replication by following these steps.

To reestablish logical replication between publisher and subscriber nodes

To re-establish replication, you first disconnect the subscriber from the publisher node and then re-establish the subscription, as outlined in these steps.

1. Connect to the subscriber node using `psql` as follows.

```
psql --host=222222222222.aws-region.rds.amazonaws.com --port=5432 --
username=postgres --password --dbname=labdb
```

2. Deactivate the subscription by using the `pglogical.alter_subscription_disable` function.

```
SELECT pglogical.alter_subscription_disable('docs_lab_subscription',true);
 alter_subscription_disable
----------------------------
 t
(1 row)
```

3. Get the publisher node's identifier by querying the `pg_replication_origin`, as follows.

```
SELECT * FROM pg_replication_origin;
 roident |               roname
---------+-------------------------------------
       1 | pgl_labdb_docs_labcb4fa94_docs_lab3de412c
(1 row)
```

4. Use the response from the previous step with the `pg_replication_origin_create` command to assign the identifier that can be used by the subscription when re-established.

```
SELECT pg_replication_origin_create('pgl_labdb_docs_labcb4fa94_docs_lab3de412c');
  pg_replication_origin_create
------------------------------
                             1
(1 row)
```

5. Turn on the subscription by passing its name with a status of `true`, as shown in the following example.

```
SELECT pglogical.alter_subscription_enable('docs_lab_subscription',true);
  alter_subscription_enable
---------------------------
 t
(1 row)
```

Check the status of the node. Its status should be `replicating` as shown in this example.

```
SELECT subscription_name,status,slot_name
  FROM pglogical.show_subscription_status();
            subscription_name |   status    |              slot_name
------------------------------+-------------+-------------------------------------
 docs_lab_subscription         | replicating |
 pgl_labdb_docs_lab98f517b_docs_lab3de412c
(1 row)
```

Check the status of the subscriber's replication slot on the publisher node. The slot's `active` column should return `t` (true), indicating that replication has been re-established.

```
SELECT slot_name,plugin,slot_type,active
  FROM pg_replication_slots;
                   slot_name              |      plugin      | slot_type | active
------------------------------------------+------------------+-----------+--------
 pgl_labdb_docs_lab98f517b_docs_lab3de412c | pglogical_output | logical   | t
(1 row)
```

Managing logical replication slots for Aurora PostgreSQL

For source versions earlier than 17, before you can perform a major version upgrade on an Aurora PostgreSQL DB cluster's writer instance that's serving as a publisher node in a logical replication scenario, you must drop the replication slots on the instance. The major version upgrade pre-check process notifies you that the upgrade can't proceed until the slots are dropped. For source version 17 and later, you can keep the slots. For more information, see Reestablishing logical replication after a major upgrade.

To identify replication slots that were created using the `pglogical` extension, log in to each database and get the name of the nodes. When you query the subscriber node, you get both the publisher and the subscriber nodes in the output, as shown in this example.

```
SELECT * FROM pglogical.node;
node_id   |     node_name
------------+------------------
 2182738256 | docs_lab_target
 3410995529 | docs_lab_provider
(2 rows)
```

You can get the details about the subscription with the following query.

```
SELECT sub_name,sub_slot_name,sub_target
  FROM pglogical.subscription;
 sub_name |         sub_slot_name          | sub_target
----------+--------------------------------+------------
  docs_lab_subscription     | pgl_labdb_docs_labcb4fa94_docs_lab3de412c | 2182738256
(1 row)
```

You can now drop the subscription, as follows.

```
SELECT pglogical.drop_subscription(subscription_name := 'docs_lab_subscription');
 drop_subscription
-------------------
                 1
(1 row)
```

After dropping the subscription, you can delete the node.

```
SELECT pglogical.drop_node(node_name := 'docs-lab-subscriber');
 drop_node
-----------
 t
(1 row)
```

You can verify that the node no longer exists, as follows.

```
SELECT * FROM pglogical.node;
 node_id | node_name
---------+-----------
(0 rows)
```

Parameter reference for the pglogical extension

In the table you can find parameters associated with the `pglogical` extension. Parameters such as `pglogical.conflict_log_level` and `pglogical.conflict_resolution` are used to handle update conflicts. Conflicts can emerge when changes are made locally to the same tables that are subscribed to changes from the publisher. Conflicts can also occur during various scenarios, such as two-way replication or when multiple subscribers are replicating from the same publisher. For more information, see PostgreSQL bi-directional replication using pglogical.

Parameter	Description
pglogical.batch_inserts	Batch inserts if possible. Not set by default. Change to '1' to turn on, '0' to turn off.
pglogical.conflict_log_level	Sets the log level to use for logging resolved conflicts. Supported string values are debug5, debug4, debug3, debug2, debug1, info, notice, warning, error, log, fatal, panic.
pglogical.conflict_resolution	Sets method to use to resolve conflicts when conflicts are resolvable. Supported string values are error, apply_remote, keep_local, last_update_wins, first_update_wins.
pglogical.extra_connection_options	Connection options to add to all peer node connections.
pglogical.synchronous_commit	pglogical specific synchronous commit value
pglogical.use_spi	Use SPI (server programming interface) instead of low-level API to apply changes. Set to '1' to turn on, '0' to turn off. For more information about SPI, see Server Programming Interface in the PostgreSQL documentation.

Working with the supported foreign data wrappers for Amazon Aurora PostgreSQL

A foreign data wrapper (FDW) is a specific type of extension that provides access to external data. For example, the `oracle_fdw` extension allows your Aurora PostgreSQL DB instance to work with Oracle databases.

Following, you can find information about several supported PostgreSQL foreign data wrappers.

Topics

- Using the log_fdw extension to access the DB log using SQL
- Using the postgres_fdw extension to access external data
- Working with MySQL databases by using the mysql_fdw extension

- Working with Oracle databases by using the oracle_fdw extension
- Working with SQL Server databases by using the tds_fdw extension

Using the log_fdw extension to access the DB log using SQL

Aurora PostgreSQL DB cluster supports the `log_fdw` extension, which you can use to access your database engine log using a SQL interface. The `log_fdw` extension provides two functions that make it easy to create foreign tables for database logs:

- `list_postgres_log_files` – Lists the files in the database log directory and the file size in bytes.
- `create_foreign_table_for_log_file(table_name text, server_name text, log_file_name text)` – Builds a foreign table for the specified file in the current database.

All functions created by `log_fdw` are owned by `rds_superuser`. Members of the `rds_superuser` role can grant access to these functions to other database users.

By default, the log files are generated by Amazon Aurora in `stderr` (standard error) format, as specified in `log_destination` parameter. There are only two options for this parameter, `stderr` and `csvlog` (comma-separated values, CSV). If you add the `csvlog` option to the parameter, Amazon Aurora generates both `stderr` and `csvlog` logs. This can affect the storage capacity on your DB cluster, so you need to be aware of the other parameters that affect log handling. For more information, see Setting the log destination (`stderr`, `csvlog`, `jsonlog`).

One benefit of generating `csvlog` logs is that the `log_fdw` extension lets you build foreign tables with the data neatly split into several columns. To do this, your instance needs to be associated with a custom DB parameter group so that you can change the setting for `log_destination`. For more information about how to do so, see Parameter groups for Amazon Aurora.

The following example assumes that the `log_destination` parameter includes `cvslog`.

To use the log_fdw extension

1. Install the `log_fdw` extension.

```
postgres=> CREATE EXTENSION log_fdw;
CREATE EXTENSION
```

2. Create the log server as a foreign data wrapper.

```
postgres=> CREATE SERVER log_server FOREIGN DATA WRAPPER log_fdw;
CREATE SERVER
```

3. Select all from a list of log files.

```
postgres=> SELECT * FROM list_postgres_log_files() ORDER BY 1;
```

A sample response is as follows.

```
          file_name           | file_size_bytes
------------------------------+-----------------
 postgresql.log.2023-08-09-22.csv |            1111
 postgresql.log.2023-08-09-23.csv |            1172
 postgresql.log.2023-08-10-00.csv |            1744
 postgresql.log.2023-08-10-01.csv |            1102
(4 rows)
```

4. Create a table with a single 'log_entry' column for the selected file.

```
postgres=> SELECT create_foreign_table_for_log_file('my_postgres_error_log',
     'log_server', 'postgresql.log.2023-08-09-22.csv');
```

The response provides no detail other than that the table now exists.

```
-----------------------------------
(1 row)
```

5. Select a sample of the log file. The following code retrieves the log time and error message description.

```
postgres=> SELECT log_time, message FROM my_postgres_error_log ORDER BY 1;
```

A sample response is as follows.

```
            log_time             |                                 message
---------------------------------
+------------------------------------------------------------------------------
Tue Aug 09 15:45:18.172 2023 PDT | ending log output to stderr
Tue Aug 09 15:45:18.175 2023 PDT | database system was interrupted; last known up
 at 2023-08-09 22:43:34 UTC
```

```
Tue Aug 09 15:45:18.223 2023 PDT | checkpoint record is at 0/90002E0
Tue Aug 09 15:45:18.223 2023 PDT | redo record is at 0/90002A8; shutdown FALSE
Tue Aug 09 15:45:18.223 2023 PDT | next transaction ID: 0/1879; next OID: 24578
Tue Aug 09 15:45:18.223 2023 PDT | next MultiXactId: 1; next MultiXactOffset: 0
Tue Aug 09 15:45:18.223 2023 PDT | oldest unfrozen transaction ID: 1822, in
 database 1
(7 rows)
```

Using the postgres_fdw extension to access external data

You can access data in a table on a remote database server with the postgres_fdw extension. If you set up a remote connection from your PostgreSQL DB instance, access is also available to your read replica.

To use postgres_fdw to access a remote database server

1. Install the postgres_fdw extension.

```
CREATE EXTENSION postgres_fdw;
```

2. Create a foreign data server using CREATE SERVER.

```
CREATE SERVER foreign_server
FOREIGN DATA WRAPPER postgres_fdw
OPTIONS (host 'xxx.xx.xxx.xx', port '5432', dbname 'foreign_db');
```

3. Create a user mapping to identify the role to be used on the remote server.

> **Important**
>
> To redact the password so that it doesn't appear in the logs, set `log_statement=none` at the session level. Setting at the parameter level doesn't redact the password.

```
CREATE USER MAPPING FOR local_user
SERVER foreign_server
OPTIONS (user 'foreign_user', password 'password');
```

4. Create a table that maps to the table on the remote server.

```
CREATE FOREIGN TABLE foreign_table (
        id integer NOT NULL,
        data text)
SERVER foreign_server
OPTIONS (schema_name 'some_schema', table_name 'some_table');
```

Working with MySQL databases by using the mysql_fdw extension

To access a MySQL-compatible database from your Aurora PostgreSQL DB cluster, you can install and use the `mysql_fdw` extension. This foreign data wrapper lets you work with RDS for MySQL, Aurora MySQL, MariaDB, and other MySQL-compatible databases. The connection from Aurora PostgreSQL DB cluster to the MySQL database is encrypted on a best-effort basis, depending on the client and server configurations. However, you can enforce encryption if you like. For more information, see Using encryption in transit with the extension.

The `mysql_fdw` extension is supported on Amazon Aurora PostgreSQL version 15.4, 14.9, 13.12, 12.16, and higher releases. It supports selects, inserts, updates, and deletes from an RDS for PostgreSQL DB to tables on a MySQL-compatible database instance.

Topics

- Setting up your Aurora PostgreSQL DB to use the mysql_fdw extension
- Example: Working with an Aurora MySQL database from Aurora PostgreSQL
- Using encryption in transit with the extension

Setting up your Aurora PostgreSQL DB to use the mysql_fdw extension

Setting up the `mysql_fdw` extension on your Aurora PostgreSQL DB cluster involves loading the extension in your DB cluster and then creating the connection point to the MySQL DB instance. For that task, you need to have the following details about the MySQL DB instance:

- Hostname or endpoint. For an Aurora MySQL DB cluster, you can find the endpoint by using the Console. Choose the Connectivity & security tab and look in the "Endpoint and port" section.
- Port number. The default port number for MySQL is 3306.
- Name of the database. The DB identifier.

You also need to provide access on the security group or the access control list (ACL) for the MySQL port, 3306. Both the Aurora PostgreSQL DB cluster and the Aurora MySQL DB cluster need access to port 3306. If access isn't configured correctly, when you try to connect to MySQL-compatible table you see an error message similar to the following:

```
ERROR: failed to connect to MySQL: Can't connect to MySQL server on 'hostname.aws-
region.rds.amazonaws.com:3306' (110)
```

In the following procedure, you (as the `rds_superuser` account) create the foreign server. You then grant access to the foreign server to specific users. These users then create their own mappings to the appropriate MySQL user accounts to work with the MySQL DB instance.

To use mysql_fdw to access a MySQL database server

1. Connect to your PostgreSQL DB instance using an account that has the `rds_superuser` role. If you accepted the defaults when you created your Aurora PostgreSQL DB cluster , the user name is `postgres`, and you can connect using the `psql` command line tool as follows:

   ```
   psql --host=your-DB-instance.aws-region.rds.amazonaws.com --port=5432 --
   username=postgres --password
   ```

2. Install the `mysql_fdw` extension as follows:

   ```
   postgres=> CREATE EXTENSION mysql_fdw;
   CREATE EXTENSION
   ```

After the extension is installed on your Aurora PostgreSQL DB cluster , you set up the foreign server that provides the connection to a MySQL database.

To create the foreign server

Perform these tasks on the Aurora PostgreSQL DB cluster . The steps assume that you're connected as a user with `rds_superuser` privileges, such as `postgres`.

1. Create a foreign server in the Aurora PostgreSQL DB cluster :

   ```
   postgres=> CREATE SERVER mysql-db FOREIGN DATA WRAPPER mysql_fdw OPTIONS (host 'db-
   name.111122223333.aws-region.rds.amazonaws.com', port '3306');
   CREATE SERVER
   ```

2. Grant the appropriate users access to the foreign server. These should be non-administrator users, that is, users without the `rds_superuser` role.

```
postgres=> GRANT USAGE ON FOREIGN SERVER mysql-db to user1;
GRANT
```

PostgreSQL users create and manage their own connections to the MySQL database through the foreign server.

Example: Working with an Aurora MySQL database from Aurora PostgreSQL

Suppose that you have a simple table on an Aurora PostgreSQL DB instance . Your Aurora PostgreSQL users want to query (`SELECT`), `INSERT`, `UPDATE`, and `DELETE` items on that table. Assume that the `mysql_fdw` extension was created on your RDS for PostgreSQL DB instance, as detailed in the preceding procedure. After you connect to the RDS for PostgreSQL DB instance as a user that has `rds_superuser` privileges, you can proceed with the following steps.

1. On the Aurora PostgreSQL DB instance, create a foreign server:

```
test=> CREATE SERVER mysqldb FOREIGN DATA WRAPPER mysql_fdw OPTIONS (host 'your-
DB.aws-region.rds.amazonaws.com', port '3306');
CREATE SERVER
```

2. Grant usage to a user who doesn't have `rds_superuser` permissions, for example, `user1`:

```
test=> GRANT USAGE ON FOREIGN SERVER mysqldb TO user1;
GRANT
```

3. Connect as *`user1`*, and then create a mapping to the MySQL user:

```
test=> CREATE USER MAPPING FOR user1 SERVER mysqldb OPTIONS (username 'myuser',
 password 'mypassword');
CREATE USER MAPPING
```

4. Create a foreign table linked to the MySQL table:

```
test=> CREATE FOREIGN TABLE mytab (a int, b text) SERVER mysqldb OPTIONS (dbname
 'test', table_name '');
CREATE FOREIGN TABLE
```

5. Run a simple query against the foreign table:

```
test=> SELECT * FROM mytab;
a |   b
---+-------
1 | apple
(1 row)
```

6. You can add, change, and remove data from the MySQL table. For example:

```
test=> INSERT INTO mytab values (2, 'mango');
INSERT 0 1
```

Run the SELECT query again to see the results:

```
test=> SELECT * FROM mytab ORDER BY 1;
 a |   b
---+-------
1 | apple
2 | mango
(2 rows)
```

Using encryption in transit with the extension

The connection to MySQL from Aurora PostgreSQL uses encryption in transit (TLS/SSL) by default. However, the connection falls back to non-encrypted when the client and server configuration differ. You can enforce encryption for all outgoing connections by specifying the `REQUIRE SSL` option on the RDS for MySQL user accounts. This same approach also works for MariaDB and Aurora MySQL user accounts.

For MySQL user accounts configured to `REQUIRE SSL`, the connection attempt fails if a secure connection can't be established.

To enforce encryption for existing MySQL database user accounts, you can use the `ALTER USER` command. The syntax varies, depending on the MySQL version, as shown in the following table. For more information, see ALTER USER in *MySQL Reference Manual*.

MySQL 5.7, MySQL 8.0	MySQL 5.6
`ALTER USER 'user'@'%' REQUIRE SSL;`	`GRANT USAGE ON *.* to 'user'@'%' REQUIRE SSL;`

For more information about the `mysql_fdw` extension, see the mysql_fdw documentation.

Working with Oracle databases by using the oracle_fdw extension

To access an Oracle database from your Aurora PostgreSQL DB cluster you can install and use the `oracle_fdw` extension. This extension is a foreign data wrapper for Oracle databases. To learn more about this extension, see the oracle_fdw documentation.

The `oracle_fdw` extension is supported on Aurora PostgreSQL 12.7 (Amazon Aurora release 4.2) and higher versions.

Topics

- Turning on the oracle_fdw extension
- Example: Using a foreign server linked to an Amazon RDS for Oracle database
- Working with encryption in transit
- Understanding the pg_user_mappings view and permissions

Turning on the oracle_fdw extension

To use the oracle_fdw extension, perform the following procedure.

To turn on the oracle_fdw extension

- Run the following command using an account that has `rds_superuser` permissions.

```
CREATE EXTENSION oracle_fdw;
```

Example: Using a foreign server linked to an Amazon RDS for Oracle database

The following example shows the use of a foreign server linked to an Amazon RDS for Oracle database.

To create a foreign server linked to an RDS for Oracle database

1. Note the following on the RDS for Oracle DB instance:
   - Endpoint
   - Port
   - Database name
2. Create a foreign server.

```
test=> CREATE SERVER oradb FOREIGN DATA WRAPPER oracle_fdw OPTIONS (dbserver
 '//endpoint:port/DB_name');
CREATE SERVER
```

3. Grant usage to a user who doesn't have `rds_superuser` privileges, for example `user1`.

```
test=> GRANT USAGE ON FOREIGN SERVER oradb TO user1;
GRANT
```

4. Connect as `user1`, and create a mapping to an Oracle user.

```
test=> CREATE USER MAPPING FOR user1 SERVER oradb OPTIONS (user 'oracleuser',
 password 'mypassword');
CREATE USER MAPPING
```

5. Create a foreign table linked to an Oracle table.

```
test=> CREATE FOREIGN TABLE mytab (a int) SERVER oradb OPTIONS (table 'MYTABLE');
CREATE FOREIGN TABLE
```

6. Query the foreign table.

```
test=>  SELECT * FROM mytab;
a
---
1
(1 row)
```

If the query reports the following error, check your security group and access control list (ACL) to make sure that both instances can communicate.

```
ERROR: connection for foreign table "mytab" cannot be established
DETAIL: ORA-12170: TNS:Connect timeout occurred
```

Working with encryption in transit

PostgreSQL-to-Oracle encryption in transit is based on a combination of client and server configuration parameters. For an example using Oracle 21c, see About the Values for Negotiating Encryption and Integrity in the Oracle documentation. The client used for oracle_fdw on Amazon RDS is configured with ACCEPTED, meaning that the encryption depends on the Oracle database server configuration and it uses Oracle Security Library (libnnz) for encryption.

If your database is on RDS for Oracle, see Oracle native network encryption to configure the encryption.

Understanding the pg_user_mappings view and permissions

The PostgreSQL catalog `pg_user_mapping` stores the mapping from an Aurora PostgreSQL user to the user on a foreign data (remote) server. Access to the catalog is restricted, but you use the `pg_user_mappings` view to see the mappings. In the following, you can find an example that shows how permissions apply with an example Oracle database, but this information applies more generally to any foreign data wrapper.

In the following output, you can find roles and permissions mapped to three different example users. Users `rdssu1` and `rdssu2` are members of the `rds_superuser` role, and `user1` isn't. The example uses the `psql` metacommand `\du` to list existing roles.

```
test=>  \du
                                                          List of roles
    Role name    |                         Attributes                         |
                 Member of
-----------------+------------------------------------------------------------
+-----------------------------------------------------------
 rdssu1          |                                                            |
 {rds_superuser}
 rdssu2          |                                                            |
 {rds_superuser}
 user1           |                                                            | {}
```

All users, including users that have `rds_superuser` privileges, are allowed to view their own user mappings (`umoptions`) in the `pg_user_mappings` table. As shown in the following

example, when `rdssu1` tries to obtain all user mappings, an error is raised even though `rdssu1rds_superuser` privileges:

```
test=> SELECT * FROM pg_user_mapping;
ERROR: permission denied for table pg_user_mapping
```

Following are some examples.

```
test=> SET SESSION AUTHORIZATION rdssu1;
SET
test=> SELECT * FROM pg_user_mappings;
 umid  | srvid | srvname | umuser | usename    |            umoptions
-------+-------+---------+--------+------------+---------------------------------
 16414 | 16411 | oradb   |  16412 | user1      |
 16423 | 16411 | oradb   |  16421 | rdssu1     | {user=oracleuser,password=mypwd}
 16424 | 16411 | oradb   |  16422 | rdssu2     |
 (3 rows)

test=> SET SESSION AUTHORIZATION rdssu2;
SET
test=> SELECT * FROM pg_user_mappings;
 umid  | srvid | srvname | umuser | usename    |            umoptions
-------+-------+---------+--------+------------+---------------------------------
 16414 | 16411 | oradb   |  16412 | user1      |
 16423 | 16411 | oradb   |  16421 | rdssu1     |
 16424 | 16411 | oradb   |  16422 | rdssu2     | {user=oracleuser,password=mypwd}
 (3 rows)

test=> SET SESSION AUTHORIZATION user1;
SET
test=> SELECT * FROM pg_user_mappings;
 umid  | srvid | srvname | umuser | usename    |           umoptions
-------+-------+---------+--------+------------+-------------------------------
 16414 | 16411 | oradb   |  16412 | user1      | {user=oracleuser,password=mypwd}
 16423 | 16411 | oradb   |  16421 | rdssu1     |
 16424 | 16411 | oradb   |  16422 | rdssu2     |
 (3 rows)
```

Because of implementation differences between `information_schema._pg_user_mappings` and `pg_catalog.pg_user_mappings`, a manually created `rds_superuser` requires additional permissions to view passwords in `pg_catalog.pg_user_mappings`.

No additional permissions are required for an `rds_superuser` to view passwords in `information_schema._pg_user_mappings`.

Users who don't have the `rds_superuser` role can view passwords in `pg_user_mappings` only under the following conditions:

- The current user is the user being mapped and owns the server or holds the `USAGE` privilege on it.
- The current user is the server owner and the mapping is for `PUBLIC`.

Working with SQL Server databases by using the tds_fdw extension

You can use the PostgreSQL `tds_fdw` extension to access databases that support the tabular data stream (TDS) protocol, such as Sybase and Microsoft SQL Server databases. This foreign data wrapper lets you connect from your Aurora PostgreSQL DB cluster to databases that use the TDS protocol, including Amazon RDS for Microsoft SQL Server. For more information, see tds-fdw/tds_fdw documentation on GitHub.

The `tds_fdw` extension is supported on Amazon Aurora PostgreSQL version 13.6 and higher releases.

Setting up your Aurora PostgreSQL DB to use the tds_fdw extension

In the following procedures, you can find an example of setting up and using the `tds_fdw` with an Aurora PostgreSQL DB cluster. Before you can connect to a SQL Server database using `tds_fdw`, you need to get the following details for the instance:

- Hostname or endpoint. For an RDS for SQL Server DB instance, you can find the endpoint by using the Console. Choose the Connectivity & security tab and look in the "Endpoint and port" section.
- Port number. The default port number for Microsoft SQL Server is 1433.
- Name of the database. The DB identifier.

You also need to provide access on the security group or the access control list (ACL) for the SQL Server port, 1433. Both the Aurora PostgreSQL DB cluster and the RDS for SQL Server DB instance need access to port 1433. If access isn't configured correctly, when you try to query the Microsoft SQL Server you see the following error message:

```
ERROR: DB-Library error: DB #: 20009, DB Msg: Unable to connect:
Adaptive Server is unavailable or does not exist (mssql2019.aws-
region.rds.amazonaws.com), OS #: 0, OS Msg: Success, Level: 9
```

To use tds_fdw to connect to a SQL Server database

1. Connect to your Aurora PostgreSQL DB cluster's primary instance using an account that has the `rds_superuser` role:

   ```
   psql --host=your-cluster-name-instance-1.aws-region.rds.amazonaws.com --port=5432
    --username=test --password
   ```

2. Install the `tds_fdw` extension:

   ```
   test=> CREATE EXTENSION tds_fdw;
   CREATE EXTENSION
   ```

After the extension is installed on your Aurora PostgreSQL DB cluster , you set up the foreign server.

To create the foreign server

Perform these tasks on the Aurora PostgreSQL DB cluster using an account that has `rds_superuser` privileges.

1. Create a foreign server in the Aurora PostgreSQL DB cluster:

   ```
   test=> CREATE SERVER sqlserverdb FOREIGN DATA WRAPPER tds_fdw OPTIONS
    (servername 'mssql2019.aws-region.rds.amazonaws.com', port '1433', database
    'tds_fdw_testing');
   CREATE SERVER
   ```

   To access non-ASCII data on the SQLServer side, create a server link with the character_set option in the Aurora PostgreSQL DB cluster:

   ```
   test=> CREATE SERVER sqlserverdb FOREIGN DATA WRAPPER tds_fdw OPTIONS (servername
    'mssql2019.aws-region.rds.amazonaws.com', port '1433', database 'tds_fdw_testing',
    character_set 'UTF-8');
   CREATE SERVER
   ```

2. Grant permissions to a user who doesn't have `rds_superuser` role privileges, for example, `user1`:

```
test=> GRANT USAGE ON FOREIGN SERVER sqlserverdb TO user1;
```

3. Connect as user1 and create a mapping to a SQL Server user:

```
test=> CREATE USER MAPPING FOR user1 SERVER sqlserverdb OPTIONS (username
 'sqlserveruser', password 'password');
CREATE USER MAPPING
```

4. Create a foreign table linked to a SQL Server table:

```
test=> CREATE FOREIGN TABLE mytab (a int) SERVER sqlserverdb OPTIONS (table
 'MYTABLE');
CREATE FOREIGN TABLE
```

5. Query the foreign table:

```
test=> SELECT * FROM mytab;
 a
---
 1
(1 row)
```

Using encryption in transit for the connection

The connection from Aurora PostgreSQL to SQL Server uses encryption in transit (TLS/SSL) depending on the SQL Server database configuration. If the SQL Server isn't configured for encryption, the RDS for PostgreSQL client making the request to the SQL Server database falls back to unencrypted.

You can enforce encryption for the connection to RDS for SQL Server DB instances by setting the `rds.force_ssl` parameter. To learn how, see Forcing connections to your DB instance to use SSL. For more information about SSL/TLS configuration for RDS for SQL Server, see Using SSL with a Microsoft SQL Server DB instance.

rds_tools functions reference

The `rds_tools` extension provides a set of utility functions for managing and monitoring your Aurora PostgreSQL DB instance. Using these functions, you can diagnose replication, vacuum, and configuration issues directly from SQL, without separate monitoring tools. These functions are in addition to the standard PostgreSQL functions. For more information about standard PostgreSQL functions, see Functions and Operators in the PostgreSQL documentation.

This section describes the `rds_tools` functions available on Aurora PostgreSQL. Each function description notes the `rds_tools` extension version in which the function became available.

To create the extension, run the following command.

```
postgres=> CREATE EXTENSION rds_tools;
CREATE EXTENSION
```

Topics

- rds_tools.role_password_encryption_type
- rds_tools.postgres_get_av_diag

rds_tools.role_password_encryption_type

Returns the password encryption method used for each database role. This set-returning function excludes RDS-protected system roles from the output. Available starting with `rds_tools` extension version 1.0.

For an example of using this function to review password encryption before migrating database users to SCRAM, see Using SCRAM for PostgreSQL password encryption.

Function prototype

```
rds_tools.role_password_encryption_type()
```

Arguments

None.

Output

This function returns the following columns:

- `rolname` – The name of the database role.
- `encryption_type` – The password encryption method used, such as `md5` or `scram-sha-256`.

Usage example

```
=> SELECT * FROM rds_tools.role_password_encryption_type();
    rolname    | encryption_type
---------------+-----------------
 postgres      | md5
 app_user      | md5
 readonly_user | scram-sha-256
(3 rows)
```

rds_tools.postgres_get_av_diag

Retrieves diagnostic information about autovacuum processes that are blocking or lagging behind, along with suggestions for resolving each issue. Run this set-returning function in the database with the oldest transaction ID for accurate results. For more information, see Identify and resolve aggressive vacuum blockers.

Available starting with `rds_tools` extension version 1.9.

Function prototype

```
rds_tools.postgres_get_av_diag()
```

Arguments

None.

Output

This function returns the following columns:

- `blocker` – The category of database activity blocking the vacuum. The value is one of the following:
  - Active statement
  - Idle in transaction
  - Prepared transaction

  - Logical replication slot
  - Read replica with physical replication slot
  - Read replica with streaming replication
  - Temporary tables
- `database` – The name of the database where the blocking activity is occurring.
- `blocker_identifier` – The identifier of the blocking activity. The value depends on the blocker type:
  - For an active statement or idle-in-transaction session, the process ID with its SQL statement.
  - For a prepared transaction, the prepared transaction name.
  - For a read replica, the IP address of the replica.
  - For a replication slot, the replication slot name.
- `wait_event` – The wait event of the blocking session, where applicable.
- `autovacuum_lagging_by` – The number of transactions that autovacuum is lagging behind for the category.
- `suggestion` – A suggestion to resolve the blocker, including the database name, process ID, and the action to take.
- `suggested_action` – An array of the actions to take to resolve the blocker.

Usage example

```
=> SELECT *
   FROM rds_tools.postgres_get_av_diag()
   ORDER BY autovacuum_lagging_by DESC;

blocker               | Active statement
database              | my_database
blocker_identifier    | SELECT pg_sleep(20000);
wait_event            | Timeout:PgSleep
autovacuum_lagging_by | 568600871
suggestion            | Connect to database "my_database", review carefully, and
 consider terminating the process using suggested_action.
suggested_action      | {"SELECT pg_terminate_backend(29621);"}
```

Working with Trusted Language Extensions for PostgreSQL

Trusted Language Extensions for PostgreSQL is an open source development kit for building PostgreSQL extensions. It allows you to build high performance PostgreSQL extensions and safely run them on your Aurora PostgreSQL DB cluster. By using Trusted Language Extensions (TLE) for PostgreSQL, you can create PostgreSQL extensions that follow the documented approach for extending PostgreSQL functionality. For more information, see Packaging Related Objects into an Extension in the PostgreSQL documentation.

One key benefit of TLE is that you can use it in environments that don't provide access to the file system underlying the PostgreSQL instance. Previously, installing a new extension required access to the file system. TLE removes this constraint. It provides a development environment for creating new extensions for any PostgreSQL database, including those running on your Aurora PostgreSQL DB clusters.

TLE is designed to prevent access to unsafe resources for the extensions that you create using TLE. Its runtime environment limits the impact of any extension defect to a single database connection. TLE also gives database administrators fine-grained control over who can install extensions, and it provides a permissions model for running them.

TLE is supported on Aurora PostgreSQL version 14.5 and higher versions.

The Trusted Language Extensions development environment and runtime are packaged as the `pg_tle` PostgreSQL extension, version 1.0.1. It supports creating extensions in JavaScript, Perl, Tcl, PL/pgSQL, and SQL. You install the `pg_tle` extension in your Aurora PostgreSQL DB cluster in the same way that you install other PostgreSQL extensions. After the `pg_tle` is set up, developers can use it to create new PostgreSQL extensions, known as *TLE extensions*.

In the following topics, you can find information about how to set up Trusted Language Extensions and how to get started creating your own TLE extensions.

Topics

- Terminology
- Requirements for using Trusted Language Extensions for PostgreSQL
- Setting up Trusted Language Extensions in your Aurora PostgreSQL DB cluster
- Overview of Trusted Language Extensions for PostgreSQL

- Creating TLE extensions for Aurora PostgreSQL
- Dropping your TLE extensions from a database
- Uninstalling Trusted Language Extensions for PostgreSQL
- Using PostgreSQL hooks with your TLE extensions
- Function reference for Trusted Language Extensions for PostgreSQL
- Hooks reference for Trusted Language Extensions for PostgreSQL

Terminology

To help you better understand Trusted Language Extensions, view the following glossary for terms used in this topic.

Trusted Language Extensions for PostgreSQL

Trusted Language Extensions for PostgreSQL is the official name of the open source development kit that's packaged as the `pg_tle` extension. It's available for use on any PostgreSQL system. For more information, see aws/pg_tle on GitHub.

Trusted Language Extensions

Trusted Language Extensions is the short name for Trusted Language Extensions for PostgreSQL. This shortened name and its abbreviation (TLE) are also used in this documentation.

trusted language

A *trusted language* is a programming or scripting language that has specific security attributes. For example, trusted languages typically restrict access to the file system, and they limit use of specified networking properties. The TLE development kit is designed to support trusted languages. PostgreSQL supports several different languages that are used to create trusted or untrusted extensions. For an example, see Trusted and Untrusted PL/Perl in the PostgreSQL documentation. When you create an extension using Trusted Language Extensions, the extension inherently uses trusted language mechanisms.

TLE extension

A *TLE extension* is a PostgreSQL extension that's been created by using the Trusted Language Extensions (TLE) development kit.

Requirements for using Trusted Language Extensions for PostgreSQL

The following are requirements for setting up and using the TLE development kit.

- **Aurora PostgreSQL versions** – Trusted Language Extensions is supported on Aurora PostgreSQL version 14.5 and higher versions only.
  - If you need to upgrade your Aurora PostgreSQL DB cluster, see Upgrading Amazon Aurora PostgreSQL DB clusters.
  - If you don't yet have an Aurora DB cluster running PostgreSQL, you can create one. For more information, see Creating and connecting to an Aurora PostgreSQL DB cluster.
- **Requires `rds_superuser` privileges** – To set up and configure the `pg_tle` extension, your database user role must have the permissions of the `rds_superuser` role. By default, this role is granted to the `postgres` user that creates the Aurora PostgreSQL DB cluster.
- **Requires a custom DB parameter group** – Your Aurora PostgreSQL DB cluster must be configured with a custom DB parameter group. You use the custom DB parameter group for the writer instance of your Aurora PostgreSQL DB cluster.
  - If your Aurora PostgreSQL DB cluster isn't configured with a custom DB parameter group, you should create one and associate it with the writer instance of your Aurora PostgreSQL DB cluster. For a short summary of steps, see Creating and applying a custom DB parameter group.
  - If your Aurora PostgreSQL DB cluster is already configured using a custom DB parameter group, you can set up Trusted Language Extensions. For details, see Setting up Trusted Language Extensions in your Aurora PostgreSQL DB cluster.

Creating and applying a custom DB parameter group

Use the following steps to create a custom DB parameter group and configure your Aurora PostgreSQL DB cluster to use it.

Console

To create a custom DB parameter group and use it with your Aurora PostgreSQL DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose Parameter groups from the Amazon RDS menu.

3. Choose **Create parameter group**.
4. In the **Parameter group details** page, enter the following information.
   - For **Parameter group family**, choose aurora-postgresql14.
   - For **Type**, choose DB Parameter Group.
   - For **Group name**, give your parameter group a meaningful name in the context of your operations.
   - For **Description**, enter a useful description so that others on your team can easily find it.
5. Choose **Create**. Your custom DB parameter group is created in your Amazon Web Services Region. You can now modify your Aurora PostgreSQL DB cluster to use it by following the next steps.
6. Choose **Databases** from the Amazon RDS menu.
7. Choose the Aurora PostgreSQL DB cluster that you want to use with TLE from among those listed, and then choose **Modify.**
8. In the Modify DB cluster settings page, find **Database options** and use the selector to choose your custom DB parameter group.
9. Choose **Continue** to save the change.
10. Choose **Apply immediately** so that you can continue setting up the Aurora PostgreSQL DB cluster to use TLE.

To continue setting up your system for Trusted Language Extensions, see Setting up Trusted Language Extensions in your Aurora PostgreSQL DB cluster.

For more information working with DB cluster and DB parameter groups, see DB cluster parameter groups for Amazon Aurora DB clusters.

Amazon CLI

You can avoid specifying the `--region` argument when you use CLI commands by configuring your Amazon CLI with your default Amazon Web Services Region. For more information, see Configuration basics in the *Amazon Command Line Interface User Guide*.

To create a custom DB parameter group and use it with your Aurora PostgreSQL DB cluster

1. Use the create-db-parameter-group Amazon CLI command to create a custom DB parameter group based on aurora-postgresql14 for your Amazon Web Services Region. Note that in

this step you create a DB parameter group to apply to the writer instance of your Aurora PostgreSQL DB cluster.

For Linux, macOS, or Unix:

```
aws rds create-db-parameter-group \
  --region aws-region \
  --db-parameter-group-name custom-params-for-pg-tle \
  --db-parameter-group-family aurora-postgresql14 \
  --description "My custom DB parameter group for Trusted Language Extensions"
```

For Windows:

```
aws rds create-db-parameter-group ^
  --region aws-region ^
  --db-parameter-group-name custom-params-for-pg-tle ^
  --db-parameter-group-family aurora-postgresql14 ^
  --description "My custom DB parameter group for Trusted Language Extensions"
```

Your custom DB parameter group is available in your Amazon Web Services Region, so you can modify the writer instance of your Aurora PostgreSQL DB cluster to use it.

2. Use the modify-db-instance Amazon CLI command to apply your custom DB parameter group to the writer instance of your Aurora PostgreSQL DB cluster. This command immediately reboots the active instance.

   For Linux, macOS, or Unix:

   ```
   aws rds modify-db-instance \
     --region aws-region \
     --db-instance-identifier your-writer-instance-name \
     --db-parameter-group-name custom-params-for-pg-tle \
     --apply-immediately
   ```

   For Windows:

   ```
   aws rds modify-db-instance ^
     --region aws-region ^
     --db-instance-identifier your-writer-instance-name ^
     --db-parameter-group-name custom-params-for-pg-tle ^
   ```

```
  --apply-immediately
```

To continue setting up your system for Trusted Language Extensions, see Setting up Trusted Language Extensions in your Aurora PostgreSQL DB cluster.

For more information, see DB parameter groups for Amazon Aurora DB instances .

Setting up Trusted Language Extensions in your Aurora PostgreSQL DB cluster

The following steps assume that your Aurora PostgreSQL DB cluster is associated with a custom DB cluster parameter group. You can use the Amazon Web Services Management Console or the Amazon CLI for these steps.


When you set up Trusted Language Extensions in your Aurora PostgreSQL DB cluster , you install it in a specific database for use by the database users who have permissions on that database.

Console

To set up Trusted Language Extensions

Perform the following steps using an account that's a member of the `rds_superuser` group (role).

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose your Aurora PostgreSQL DB cluster's Writer instance .
3. Open the **Configuration** tab for your Aurora PostgreSQL DB cluster writer instance. Among the Instance details, find the **Parameter group** link.
4. Choose the link to open the custom parameters associated with your Aurora PostgreSQL DB cluster.
5. In the **Parameters** search field, type `shared_pre` to find the `shared_preload_libraries` parameter.
6. Choose **Edit parameters** to access the property values.
7. Add `pg_tle` to the list in the **Values** field. Use a comma to separate items in the list of values.

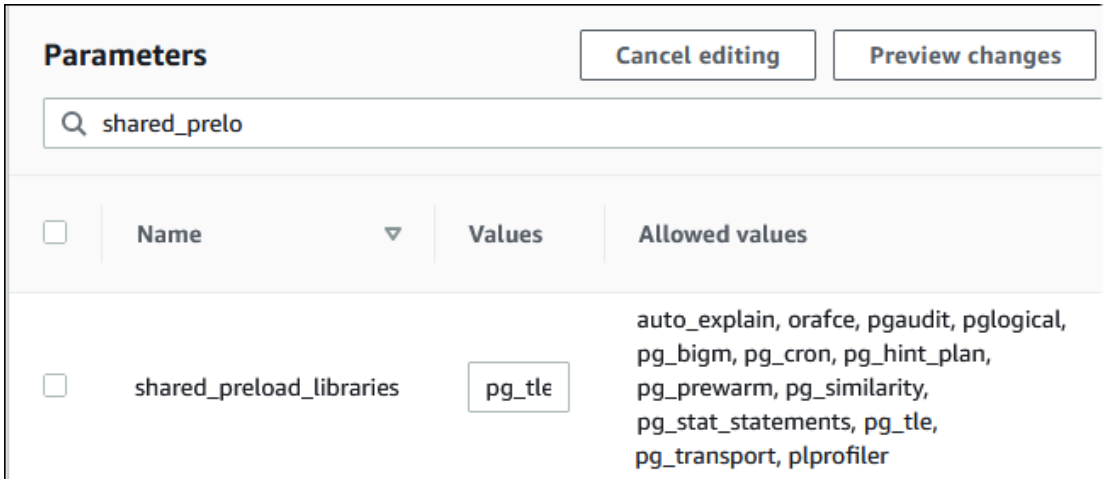

8. Reboot the writer instance of your Aurora PostgreSQL DB cluster so that your change to the `shared_preload_libraries` parameter takes effect.
9. When the instance is available, verify that `pg_tle` has been initialized. Use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster, and then run the following command.

```
SHOW shared_preload_libraries;
shared_preload_libraries
--------------------------
rdsutils,pg_tle
(1 row)
```

10. With the `pg_tle` extension initialized, you can now create the extension.

```
CREATE EXTENSION pg_tle;
```

You can verify that the extension is installed by using the following `psql` metacommand.

```
labdb=> \dx
                          List of installed extensions
  Name   | Version |   Schema   |                Description
---------+---------+------------+-------------------------------------------
 pg_tle  | 1.0.1   | pgtle      | Trusted-Language Extensions for PostgreSQL
 plpgsql | 1.0     | pg_catalog | PL/pgSQL procedural language
```

11. Grant the `pgtle_admin` role to the primary user name that you created for your Aurora PostgreSQL DB cluster when you set it up. If you accepted the default, it's `postgres`.

```
labdb=> GRANT pgtle_admin TO postgres;
GRANT ROLE
```

You can verify that the grant has occurred by using the `psql` metacommand as shown in the following example. Only the `pgtle_admin` and `postgres` roles are shown in the output. For more information, see Understanding PostgreSQL roles and permissions.

```
labdb=> \du
                          List of roles
    Role name    |           Attributes            |              Member of
-----------------+---------------------------------
+-----------------------------------
pgtle_admin     | Cannot login                     | {}
postgres        | Create role, Create DB          +| {rds_superuser,pgtle_admin}
                | Password valid until infinity    |...
```

12. Close the `psql` session using the `\q` metacommand.

```
\q
```

To get started creating TLE extensions, see Example: Creating a trusted language extension using SQL.

Amazon CLI

You can avoid specifying the `--region` argument when you use CLI commands by configuring your Amazon CLI with your default Amazon Web Services Region. For more information, see Configuration basics in the *Amazon Command Line Interface User Guide*.

To set up Trusted Language Extensions

1. Use the modify-db-parameter-group Amazon CLI command to add `pg_tle` to the `shared_preload_libraries` parameter.

```
aws rds modify-db-parameter-group \
   --db-parameter-group-name custom-param-group-name \
   --parameters
 "ParameterName=shared_preload_libraries,ParameterValue=pg_tle,ApplyMethod=pending-
reboot" \
```

```
    --region aws-region
```

2. Use the reboot-db-instance Amazon CLI command to reboot the writer instance of your Aurora PostgreSQL DB cluster and initialize the `pg_tle` library.

```
aws rds reboot-db-instance \
    --db-instance-identifier writer-instance \
    --region aws-region
```

3. When the instance is available, you can verify that `pg_tle` has been initialized. Use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster, and then run the following command.

```
SHOW shared_preload_libraries;
shared_preload_libraries
--------------------------
rdsutils,pg_tle
(1 row)
```

With `pg_tle` initialized, you can now create the extension.

```
CREATE EXTENSION pg_tle;
```

4. Grant the `pgtle_admin` role to the primary user name that you created for your Aurora PostgreSQL DB cluster when you set it up. If you accepted the default, it's `postgres`.

```
GRANT pgtle_admin TO postgres;
GRANT ROLE
```

5. Close the `psql` session as follows.


```
labdb=> \q
```

To get started creating TLE extensions, see Example: Creating a trusted language extension using SQL.

Overview of Trusted Language Extensions for PostgreSQL

Trusted Language Extensions for PostgreSQL is a PostgreSQL extension that you install in your Aurora PostgreSQL DB cluster in the same way that you set up other PostgreSQL extensions. In

the following image of an example database in the pgAdmin client tool, you can view some of the components that comprise the `pg_tle` extension.

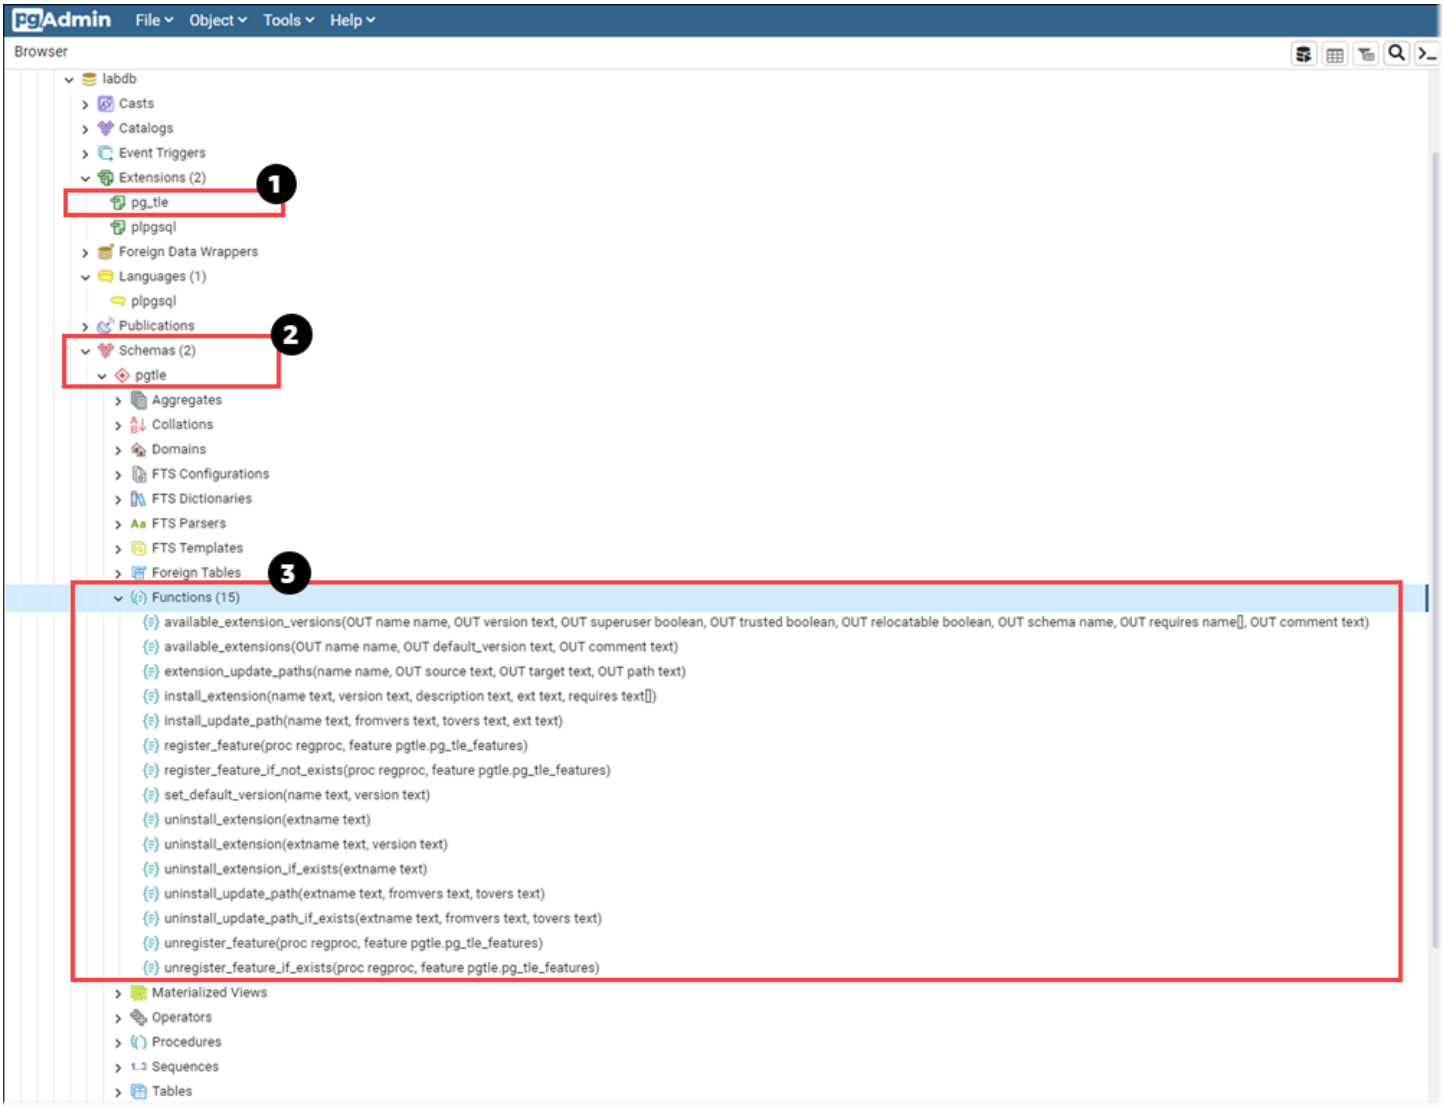

You can see the following details.

1. The Trusted Language Extensions (TLE) for PostgreSQL development kit is packaged as the `pg_tle` extension. As such, `pg_tle` is added to the available extensions for the database in which it's installed.
2. TLE has its own schema, `pgtle`. This schema contains helper functions (3) for installing and managing the extensions that you create.
3. TLE provides over a dozen helper functions for installing, registering, and managing your extensions. To learn more about these functions, see [Function reference for Trusted Language Extensions for PostgreSQL].

Other components of the pg_tle extension include the following:

- **The pgtle_admin role** – The pgtle_admin role is created when the pg_tle extension is installed. This role is privileged and should be treated as such. We strongly recommend that you follow the principle of *least privilege* when granting the pgtle_admin role to database users. In other words, grant the pgtle_admin role only to database users that are allowed to create, install, and manage new TLE extensions, such as postgres.
- **The pgtle.feature_info table** – The pgtle.feature_info table is a protected table that contains information about your TLEs, hooks, and the custom stored procedures and functions that they use. If you have pgtle_admin privileges, you use the following Trusted Language Extensions functions to add and update that information in the table.
  - pgtle.register_feature
  - pgtle.register_feature_if_not_exists
  - pgtle.unregister_feature
  - pgtle.unregister_feature_if_exists

Creating TLE extensions for Aurora PostgreSQL

You can install any extensions that you create with TLE in any Aurora PostgreSQL DB cluster that has the pg_tle extension installed. The pg_tle extension is scoped to the PostgreSQL database in which it's installed. The extensions that you create using TLE are scoped to the same database.

Use the various pgtle functions to install the code that makes up your TLE extension. The following Trusted Language Extensions functions all require the pgtle_admin role.

- pgtle.install_extension
- pgtle.install_update_path
- pgtle.register_feature
- pgtle.register_feature_if_not_exists
- pgtle.set_default_version
- pgtle.uninstall_extension(name)
- pgtle.uninstall_extension(name, version)
- pgtle.uninstall_extension_if_exists
- pgtle.uninstall_update_path

- pgtle.uninstall_update_path_if_exists
- pgtle.unregister_feature
- pgtle.unregister_feature_if_exists

Example: Creating a trusted language extension using SQL

The following example shows you how to create a TLE extension named `pg_distance` that contains a few SQL functions for calculating distances using different formulas. In the listing, you can find the function for calculating the Manhattan distance and the function for calculating the Euclidean distance. For more information about the difference between these formulas, see Taxicab geometry and Euclidean geometry in Wikipedia.

You can use this example in your own Aurora PostgreSQL DB cluster if you have the `pg_tle` extension set up as detailed in Setting up Trusted Language Extensions in your Aurora PostgreSQL DB cluster.

> **Note**
>
> You need to have the privileges of the `pgtle_admin` role to follow this procedure.

To create the example TLE extension

The following steps use an example database named `labdb`. This database is owned by the `postgres` primary user. The `postgres` role also has the permissions of the `pgtle_admin` role.

1. Use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster.

```
psql --host=db-instance-123456789012.aws-region.rds.amazonaws.com
--port=5432 --username=postgres --password --dbname=labdb
```

2. Create a TLE extension named `pg_distance` by copying the following code and pasting it into your `psql` session console.

```
SELECT pgtle.install_extension
(
 'pg_distance',
 '0.1',
  'Distance functions for two points',
```

```
$_pg_tle_$
    CREATE FUNCTION dist(x1 float8, y1 float8, x2 float8, y2 float8, norm int)
    RETURNS float8
    AS $$
      SELECT (abs(x2 - x1) ^ norm + abs(y2 - y1) ^ norm) ^ (1::float8 / norm);
    $$ LANGUAGE SQL;

    CREATE FUNCTION manhattan_dist(x1 float8, y1 float8, x2 float8, y2 float8)
    RETURNS float8
    AS $$
      SELECT dist(x1, y1, x2, y2, 1);
    $$ LANGUAGE SQL;

    CREATE FUNCTION euclidean_dist(x1 float8, y1 float8, x2 float8, y2 float8)
    RETURNS float8
    AS $$
      SELECT dist(x1, y1, x2, y2, 2);
    $$ LANGUAGE SQL;
$_pg_tle_$
);
```

You see the output, such as the following.

```
install_extension
---------------
 t
(1 row)
```

The artifacts that make up the `pg_distance` extension are now installed in your database. These artifacts include the control file and the code for the extension, which are items that need to be present so that the extension can be created using the `CREATE EXTENSION` command. In other words, you still need to create the extension to make its functions available to database users.

3. To create the extension, use the `CREATE EXTENSION` command as you do for any other extension. As with other extensions, the database user needs to have the `CREATE` permissions in the database.

```
CREATE EXTENSION pg_distance;
```

4. To test the pg_distance TLE extension, you can use it to calculate the Manhattan distance between four points.

```
labdb=> SELECT manhattan_dist(1, 1, 5, 5);
8
```

   To calculate the Euclidean distance between the same set of points, you can use the following.

```
labdb=> SELECT euclidean_dist(1, 1, 5, 5);
5.656854249492381
```

The pg_distance extension loads the functions in the database and makes them available to any users with permissions on the database.

Modifying your TLE extension

To improve query performance for the functions packaged in this TLE extension, add the following two PostgreSQL attributes to their specifications.

- IMMUTABLE – The IMMUTABLE attribute ensures that the query optimizer can use optimizations to improve query response times. For more information, see Function Volatility Categories in the PostgreSQL documentation.
- PARALLEL SAFE – The PARALLEL SAFE attribute is another attribute that allows PostgreSQL to run the function in parallel mode. For more information, see CREATE FUNCTION in the PostgreSQL documentation.

In the following example, you can see how the pgtle.install_update_path function is used to add these attributes to each function to create a version 0.2 of the pg_distance TLE extension. For more information about this function, see pgtle.install_update_path. You need to have the pgtle_admin role to perform this task.

To update an existing TLE extension and specify the default version

1. Connect to the writer instance of your Aurora PostgreSQL DB cluster using psql or another client tool, such as pgAdmin.

```
psql --host=db-instance-123456789012.aws-region.rds.amazonaws.com
```

```
--port=5432 --username=postgres --password --dbname=labdb
```

2. Modify the existing TLE extension by copying the following code and pasting it into your `psql` session console.

```
SELECT pgtle.install_update_path
(
 'pg_distance',
 '0.1',
 '0.2',
$_pg_tle_$
    CREATE OR REPLACE FUNCTION dist(x1 float8, y1 float8, x2 float8, y2 float8,
 norm int)
    RETURNS float8
    AS $$
      SELECT (abs(x2 - x1) ^ norm + abs(y2 - y1) ^ norm) ^ (1::float8 / norm);
    $$ LANGUAGE SQL IMMUTABLE PARALLEL SAFE;

    CREATE OR REPLACE FUNCTION manhattan_dist(x1 float8, y1 float8, x2 float8, y2
 float8)
    RETURNS float8
    AS $$
      SELECT dist(x1, y1, x2, y2, 1);
    $$ LANGUAGE SQL IMMUTABLE PARALLEL SAFE;

    CREATE OR REPLACE FUNCTION euclidean_dist(x1 float8, y1 float8, x2 float8, y2
 float8)
    RETURNS float8
    AS $$
      SELECT dist(x1, y1, x2, y2, 2);
    $$ LANGUAGE SQL IMMUTABLE PARALLEL SAFE;
$_pg_tle_$
);
```

You see a response similar to the following.

```
install_update_path
--------------------
 t
(1 row)
```

You can make this version of the extension the default version, so that database users don't have to specify a version when they create or update the extension in their database.

3. To specify that the modified version (version 0.2) of your TLE extension is the default version, use the `pgtle.set_default_version` function as shown in the following example.

```
SELECT pgtle.set_default_version('pg_distance', '0.2');
```

For more information about this function, see pgtle.set_default_version.

4. With the code in place, you can update the installed TLE extension in the usual way, by using `ALTER EXTENSION ... UPDATE` command, as shown here:

```
ALTER EXTENSION pg_distance UPDATE;
```

Dropping your TLE extensions from a database

You can drop your TLE extensions by using the `DROP EXTENSION` command in the same way that you do for other PostgreSQL extensions. Dropping the extension doesn't remove the installation files that make up the extension, which allows users to re-create the extension. To remove the extension and its installation files, do the following two-step process.

To drop the TLE extension and remove its installation files

1. Use `psql` or another client tool to connect to the writer instance of your Aurora PostgreSQL DB cluster.

```
psql --host=cluster-instance-1.111122223333.aws-region.rds.amazonaws.com --
port=5432 --username=postgres --password --dbname=dbname
```

2. Drop the extension as you would any PostgreSQL extension.

```
DROP EXTENSION your-TLE-extension
```

For example, if you create the `pg_distance` extension as detailed in Example: Creating a trusted language extension using SQL, you can drop the extension as follows.

```
DROP EXTENSION pg_distance;
```

You see output confirming that the extension has been dropped, as follows.

```
DROP EXTENSION
```

At this point, the extension is no longer active in the database. However, its installation files and control file are still available in the database, so database users can create the extension again if they like.

- If you want to leave the extension files intact so that database users can create your TLE extension, you can stop here.
- If you want to remove all files that make up the extension, continue to the next step.

3. To remove all installation files for your extension, use the `pgtle.uninstall_extension` function. This function removes all the code and control files for your extension.

```
SELECT pgtle.uninstall_extension('your-tle-extension-name');
```

For example, to remove all `pg_distance` installation files, use the following command.

```
SELECT pgtle.uninstall_extension('pg_distance');
 uninstall_extension
---------------------
 t
(1 row)
```

Uninstalling Trusted Language Extensions for PostgreSQL

If you no longer want to create your own TLE extensions using TLE, you can drop the `pg_tle` extension and remove all artifacts. This action includes dropping any TLE extensions in the database and dropping the `pgtle` schema.

To drop the `pg_tle` extension and its schema from a database

1. Use `psql` or another client tool to connect to the writer instance of your Aurora PostgreSQL DB cluster.

```
psql --host=cluster-instance-1.111122223333.aws-region.rds.amazonaws.com --
port=5432 --username=postgres --password --dbname=dbname
```

2. Drop the pg_tle extension from the database. If the database has your own TLE extensions still running in the database, you need to also drop those extensions. To do so, you can use the CASCADE keyword, as shown in the following.

   ```
   DROP EXTENSION pg_tle CASCADE;
   ```

   If the pg_tle extension isn't still active in the database, you don't need to use the CASCADE keyword.

3. Drop the pgtle schema. This action removes all the management functions from the database.

   ```
   DROP SCHEMA pgtle CASCADE;
   ```

   The command returns the following when the process completes.

   ```
   DROP SCHEMA
   ```

   The pg_tle extension, its schema and functions, and all artifacts are removed. To create new extensions using TLE, go through the setup process again. For more information, see Setting up Trusted Language Extensions in your Aurora PostgreSQL DB cluster.

Using PostgreSQL hooks with your TLE extensions

A *hook* is a callback mechanism available in PostgreSQL that allows developers to call custom functions or other routines during regular database operations. The TLE development kit supports PostgreSQL hooks so that you can integrate custom functions with PostgreSQL behavior at runtime. For example, you can use a hook to associate the authentication process with your own custom code, or to modify the query planning and execution process for your specific needs.

Your TLE extensions can use hooks. If a hook is global in scope, it applies across all databases. Therefore, if your TLE extension uses a global hook, then you need to create your TLE extension in all databases that your users can access.

When you use the pg_tle extension to build your own Trusted Language Extensions, you can use the available hooks from a SQL API to build out the functions of your extension. You should register any hooks with pg_tle. For some hooks, you might also need to set various configuration parameters. For example, the passcode check hook can be set to on, off, or require. For more information about specific requirements for available pg_tle hooks, see Hooks reference for Trusted Language Extensions for PostgreSQL.

Example: Creating an extension that uses a PostgreSQL hook

The example discussed in this section uses a PostgreSQL hook to check the password provided during specific SQL operations and prevents database users from setting their passwords to any of those contained in the password_check.bad_passwords table. The table contains the top-ten most commonly used, but easily breakable choices for passwords.

To set up this example in your Aurora PostgreSQL DB cluster, you must have already installed Trusted Language Extensions. For details, see Setting up Trusted Language Extensions in your Aurora PostgreSQL DB cluster.

To set up the password-check hook example

1. Use psql to connect to the writer instance of your Aurora PostgreSQL DB cluster.

```
psql --host=db-instance-123456789012.aws-region.rds.amazonaws.com
--port=5432 --username=postgres --password --dbname=labdb
```

2. Copy the code from the Password-check hook code listing and paste it into your database.

```
SELECT pgtle.install_extension (
  'my_password_check_rules',
  '1.0',
  'Do not let users use the 10 most commonly used passwords',
$_pgtle_$
  CREATE SCHEMA password_check;
  REVOKE ALL ON SCHEMA password_check FROM PUBLIC;
  GRANT USAGE ON SCHEMA password_check TO PUBLIC;

  CREATE TABLE password_check.bad_passwords (plaintext) AS
  VALUES
    ('123456'),
    ('password'),
    ('12345678'),
```

```
    ('qwerty'),
    ('123456789'),
    ('12345'),
    ('1234'),
    ('111111'),
    ('1234567'),
    ('dragon');
  CREATE UNIQUE INDEX ON password_check.bad_passwords (plaintext);

  CREATE FUNCTION password_check.passcheck_hook(username text, password text,
 password_type pgtle.password_types, valid_until timestamptz, valid_null boolean)
  RETURNS void AS $$
    DECLARE
      invalid bool := false;
    BEGIN
      IF password_type = 'PASSWORD_TYPE_MD5' THEN
        SELECT EXISTS(
          SELECT 1
          FROM password_check.bad_passwords bp
          WHERE ('md5' || md5(bp.plaintext || username)) = password
        ) INTO invalid;
        IF invalid THEN
          RAISE EXCEPTION 'Cannot use passwords from the common password
 dictionary';
        END IF;
      ELSIF password_type = 'PASSWORD_TYPE_PLAINTEXT' THEN
        SELECT EXISTS(
          SELECT 1
          FROM password_check.bad_passwords bp
          WHERE bp.plaintext = password
        ) INTO invalid;
        IF invalid THEN
          RAISE EXCEPTION 'Cannot use passwords from the common password
 dictionary';
        END IF;
      END IF;
    END
  $$ LANGUAGE plpgsql SECURITY DEFINER;

  GRANT EXECUTE ON FUNCTION password_check.passcheck_hook TO PUBLIC;

  SELECT pgtle.register_feature('password_check.passcheck_hook', 'passcheck');
$_pgtle_$
```

```
);
```

When the extension has been loaded into your database, you see the output such as the following.

```
 install_extension
-------------------
 t
(1 row)
```

3. While still connected to the database, you can now create the extension.

```
CREATE EXTENSION my_password_check_rules;
```

4. You can confirm that the extension has been created in the database by using the following `psql` metacommand.

```
\dx
                        List of installed extensions
          Name           | Version |   Schema   |
 Description
-------------------------+---------+------------
+-------------------------------------------------------------
 my_password_check_rules | 1.0     | public     | Prevent use of any of the top-ten
 most common bad passwords
 pg_tle                  | 1.0.1   | pgtle      | Trusted-Language Extensions for
 PostgreSQL
 plpgsql                 | 1.0     | pg_catalog | PL/pgSQL procedural language
(3 rows)
```

5. Open another terminal session to work with the Amazon CLI. You need to modify your custom DB parameter group to turn on the password-check hook. To do so, use the [modify-db-parameter-group] CLI command as shown in the following example.

```
aws rds modify-db-parameter-group \
    --region aws-region \
    --db-parameter-group-name your-custom-parameter-group \
    --parameters
 "ParameterName=pgtle.enable_password_check,ParameterValue=on,ApplyMethod=immediate"
```

It might take a few minutes for the change to the parameter group setting to take effect. This parameter is dynamic, however, so you don't need to restart the writer instance of the Aurora PostgreSQL DB cluster for the setting to take effect.

6. Open the `psql` session and query the database to verify that the password_check hook has been turned on.

```
labdb=> SHOW pgtle.enable_password_check;
pgtle.enable_password_check
----------------------------
on
(1 row)
```

The password-check hook is now active. You can test it by creating a new role and using one of the bad passwords, as shown in the following example.

```
CREATE ROLE test_role PASSWORD 'password';
ERROR:  Cannot use passwords from the common password dictionary
CONTEXT:  PL/pgSQL function
 password_check.passcheck_hook(text,text,pgtle.password_types,timestamp with time
 zone,boolean) line 21 at RAISE
SQL statement "SELECT password_check.passcheck_hook(
    $1::pg_catalog.text,
    $2::pg_catalog.text,
    $3::pgtle.password_types,
    $4::pg_catalog.timestamptz,
    $5::pg_catalog.bool)"
```

The output has been formatted for readability.

The following example shows that `pgsql` interactive metacommand `\password` behavior is also affected by the password_check hook.

```
postgres=> SET password_encryption TO 'md5';
SET
postgres=> \password
Enter new password for user "postgres":*****
Enter it again:*****
ERROR:  Cannot use passwords from the common password dictionary
```

```
CONTEXT:  PL/pgSQL function
 password_check.passcheck_hook(text,text,pgtle.password_types,timestamp with time
 zone,boolean) line 12 at RAISE
SQL statement "SELECT password_check.passcheck_hook($1::pg_catalog.text,
 $2::pg_catalog.text, $3::pgtle.password_types, $4::pg_catalog.timestamptz,
 $5::pg_catalog.bool)"
```

You can drop this TLE extension and uninstall its source files if you want. For more information, see Dropping your TLE extensions from a database.

Password-check hook code listing

The example code shown here defines the specification for the `my_password_check_rules` TLE extension. When you copy this code and paste it into your database, the code for the `my_password_check_rules` extension is loaded into the database, and the `password_check` hook is registered for use by the extension.

```
SELECT pgtle.install_extension (
  'my_password_check_rules',
  '1.0',
  'Do not let users use the 10 most commonly used passwords',
$_pgtle_$
  CREATE SCHEMA password_check;
  REVOKE ALL ON SCHEMA password_check FROM PUBLIC;
  GRANT USAGE ON SCHEMA password_check TO PUBLIC;

  CREATE TABLE password_check.bad_passwords (plaintext) AS
  VALUES
    ('123456'),
    ('password'),
    ('12345678'),
    ('qwerty'),
    ('123456789'),
    ('12345'),
    ('1234'),
    ('111111'),
    ('1234567'),
    ('dragon');
  CREATE UNIQUE INDEX ON password_check.bad_passwords (plaintext);

  CREATE FUNCTION password_check.passcheck_hook(username text, password text,
 password_type pgtle.password_types, valid_until timestamptz, valid_null boolean)
  RETURNS void AS $$
```

```
    DECLARE
      invalid bool := false;
    BEGIN
      IF password_type = 'PASSWORD_TYPE_MD5' THEN
        SELECT EXISTS(
          SELECT 1
          FROM password_check.bad_passwords bp
          WHERE ('md5' || md5(bp.plaintext || username)) = password
        ) INTO invalid;
        IF invalid THEN
          RAISE EXCEPTION 'Cannot use passwords from the common password dictionary';
        END IF;
      ELSIF password_type = 'PASSWORD_TYPE_PLAINTEXT' THEN
        SELECT EXISTS(
          SELECT 1
          FROM password_check.bad_passwords bp
          WHERE bp.plaintext = password
        ) INTO invalid;
        IF invalid THEN
          RAISE EXCEPTION 'Cannot use passwords from the common password dictionary';
        END IF;
      END IF;
    END
  $$ LANGUAGE plpgsql SECURITY DEFINER;

  GRANT EXECUTE ON FUNCTION password_check.passcheck_hook TO PUBLIC;

  SELECT pgtle.register_feature('password_check.passcheck_hook', 'passcheck');
$_pgtle_$
);
```

Function reference for Trusted Language Extensions for PostgreSQL

View the following reference documentation about functions available in Trusted Language Extensions for PostgreSQL. Use these functions to install, register, update, and manage your *TLE extensions*, that is, the PostgreSQL extensions that you develop using the Trusted Language Extensions development kit.

Functions

- pgtle.available_extensions
- pgtle.available_extension_versions

- pgtle.extension_update_paths
- pgtle.install_extension
- pgtle.install_update_path
- pgtle.register_feature
- pgtle.register_feature_if_not_exists
- pgtle.set_default_version
- pgtle.uninstall_extension(name)
- pgtle.uninstall_extension(name, version)
- pgtle.uninstall_extension_if_exists
- pgtle.uninstall_update_path
- pgtle.uninstall_update_path_if_exists
- pgtle.unregister_feature
- pgtle.unregister_feature_if_exists

pgtle.available_extensions

The `pgtle.available_extensions` function is a set-returning function. It returns all available TLE extensions in the database. Each returned row contains information about a single TLE extension.

Function prototype

```
pgtle.available_extensions()
```

Role

None.

Arguments

None.

Output

- `name` – The name of the TLE extension.

- `default_version` – The version of the TLE extension to use when `CREATE EXTENSION` is called without a version specified.
- `description` – A more detailed description about the TLE extension.

Usage example

```
SELECT * FROM pgtle.available_extensions();
```

pgtle.available_extension_versions

The `available_extension_versions` function is a set-returning function. It returns a list of all available TLE extensions and their versions. Each row contains information about a specific version of the given TLE extension, including whether it requires a specific role.

Function prototype

```
pgtle.available_extension_versions()
```

Role

None.

Arguments

None.

Output

- `name` – The name of the TLE extension.
- `version` – The version of the TLE extension.
- `superuser` – This value is always `false` for your TLE extensions. The permissions needed to create the TLE extension or update it are the same as for creating other objects in the given database.
- `trusted` – This value is always `false` for a TLE extension.
- `relocatable` – This value is always `false` for a TLE extension.
- `schema` – Specifies the name of the schema in which the TLE extension is installed.
- `requires` – An array containing the names of other extensions needed by this TLE extension.
- `description` – A detailed description of the TLE extension.

For more information about output values, see Packaging Related Objects into an Extension > Extension Files in the PostgreSQL documentation.

Usage example

```
SELECT * FROM pgtle.available_extension_versions();
```

pgtle.extension_update_paths

The `extension_update_paths` function is a set-returning function. It returns a list of all the possible update paths for a TLE extension. Each row includes the available upgrades or downgrades for that TLE extension.

Function prototype

```
pgtle.extension_update_paths(name)
```

Role

None.

Arguments

`name` – The name of the TLE extension from which to get upgrade paths.

Output

- `source` – The source version for an update.
- `target` – The target version for an update.
- `path` – The upgrade path used to update a TLE extension from `source` version to `target` version, for example, `0.1--0.2`.

Usage example

```
SELECT * FROM pgtle.extension_update_paths('your-TLE');
```

pgtle.install_extension

The `install_extension` function lets you install the artifacts that make up your TLE extension in the database, after which it can be created using the `CREATE EXTENSION` command.

Function prototype

```
pgtle.install_extension(name text, version text, description text, ext text, requires
 text[] DEFAULT NULL::text[])
```

Role

None.

Arguments

- `name` – The name of the TLE extension. This value is used when calling `CREATE EXTENSION`.
- `version` – The version of the TLE extension.
- `description` – A detailed description about the TLE extension. This description is displayed in the `comment` field in `pgtle.available_extensions()`.
- `ext` – The contents of the TLE extension. This value contains objects such as functions.
- `requires` – An optional parameter that specifies dependencies for this TLE extension. The `pg_tle` extension is automatically added as a dependency.

Many of these arguments are the same as those that are included in an extension control file for installing a PostgreSQL extension on the file system of a PostgreSQL instance. For more information, see the Extension Files in Packaging Related Objects into an Extension in the PostgreSQL documentation.

Output

This functions returns `OK` on success and `NULL` on error.

- `OK` – The TLE extension has been successfully installed in the database.
- `NULL` – The TLE extension hasn't been successfully installed in the database.

Usage example

```
SELECT pgtle.install_extension(
 'pg_tle_test',
 '0.1',
 'My first pg_tle extension',
$_pgtle_$
```

```
  CREATE FUNCTION my_test()
  RETURNS INT
  AS $$
    SELECT 42;
  $$ LANGUAGE SQL IMMUTABLE;
$_pgtle_$
);
```

pgtle.install_update_path

The `install_update_path` function provides an update path between two different versions of a TLE extension. This function allows users of your TLE extension to update its version by using the `ALTER EXTENSION ... UPDATE` syntax.

Function prototype

```
pgtle.install_update_path(name text, fromvers text, tovers text, ext text)
```

Role

`pgtle_admin`

Arguments

- `name` – The name of the TLE extension. This value is used when calling `CREATE EXTENSION`.
- `fromvers` – The source version of the TLE extension for the upgrade.
- `tovers` – The destination version of the TLE extension for the upgrade.
- `ext` – The contents of the update. This value contains objects such as functions.

Output

None.

Usage example

```
SELECT pgtle.install_update_path('pg_tle_test', '0.1', '0.2',
  $_pgtle_$
    CREATE OR REPLACE FUNCTION my_test()
    RETURNS INT
    AS $$
      SELECT 21;
```

```
    $$ LANGUAGE SQL IMMUTABLE;
  $_pgtle_$
);
```

pgtle.register_feature

The `register_feature` function adds the specified internal PostgreSQL feature to the `pgtle.feature_info` table. PostgreSQL hooks are an example of an internal PostgreSQL feature. The Trusted Language Extensions development kit supports the use of PostgreSQL hooks. Currently, this function supports the following feature.

- `passcheck` – Registers the password-check hook with your procedure or function that customizes PostgreSQL's password-check behavior.

Function prototype

```
pgtle.register_feature(proc regproc, feature pg_tle_feature)
```

Role

`pgtle_admin`

Arguments

- `proc` – The name of a stored procedure or function to use for the feature.
- `feature` – The name of the `pg_tle` feature (such as `passcheck`) to register with the function.

Output

None.

Usage example

```
SELECT pgtle.register_feature('pw_hook', 'passcheck');
```

pgtle.register_feature_if_not_exists

The `pgtle.register_feature_if_not_exists` function adds the specified PostgreSQL feature to the `pgtle.feature_info` table and identifies the TLE extension or other procedure

or function that uses the feature. For more information about hooks and Trusted Language Extensions, see Using PostgreSQL hooks with your TLE extensions.

Function prototype

```
pgtle.register_feature_if_not_exists(proc regproc, feature pg_tle_feature)
```

Role

`pgtle_admin`

Arguments

- `proc` – The name of a stored procedure or function that contains the logic (code) to use as a feature for your TLE extension. For example, the pw_hook code.
- `feature` – The name of the PostgreSQL feature to register for the TLE function. Currently, the only available feature is the `passcheck` hook. For more information, see Password-check hook (passcheck).

Output

Returns `true` after registering the feature for the specified extension. Returns `false` if the feature is already registered.

Usage example

```
SELECT pgtle.register_feature_if_not_exists('pw_hook', 'passcheck');
```

pgtle.set_default_version

The `set_default_version` function lets you specify a `default_version` for your TLE extension. You can use this function to define an upgrade path and designate the version as the default for your TLE extension. When database users specify your TLE extension in the `CREATE EXTENSION` and `ALTER EXTENSION ... UPDATE` commands, that version of your TLE extension is created in the database for that user.

This function returns `true` on success. If the TLE extension specified in the `name` argument doesn't exist, the function returns an error. Similarly, if the `version` of the TLE extension doesn't exist, it returns an error.

Function prototype

```
pgtle.set_default_version(name text, version text)
```

Role

`pgtle_admin`

Arguments

- `name` – The name of the TLE extension. This value is used when calling `CREATE EXTENSION`.
- `version` – The version of the TLE extension to set the default.

Output

- `true` – When setting default version succeeds, the function returns `true`.
- ERROR – Returns an error message if a TLE extension with the specified name or version doesn't exist.

Usage example

```
SELECT * FROM pgtle.set_default_version('my-extension', '1.1');
```

pgtle.uninstall_extension(name)

The `uninstall_extension` function removes all versions of a TLE extension from a database. This function prevents future calls of `CREATE EXTENSION` from installing the TLE extension. If the TLE extension doesn't exist in the database, an error is raised.

The `uninstall_extension` function won't drop a TLE extension that's currently active in the database. To remove a TLE extension that's currently active, you need to explicitly call `DROP EXTENSION` to remove it.

Function prototype

```
pgtle.uninstall_extension(extname text)
```

Role

`pgtle_admin`

Arguments

- `extname` – The name of the TLE extension to uninstall. This name is the same as the one used with `CREATE EXTENSION` to load the TLE extension for use in a given database.

Output

None.

Usage example

```
SELECT * FROM pgtle.uninstall_extension('pg_tle_test');
```

pgtle.uninstall_extension(name, version)

The `uninstall_extension(name, version)` function removes the specified version of the TLE extension from the database. This function prevents `CREATE EXTENSION` and `ALTER EXTENSION` from installing or updating a TLE extension to the specified version. This function also removes all update paths for the specified version of the TLE extension. This function won't uninstall the TLE extension if it's currently active in the database. You must explicitly call `DROP EXTENSION` to remove the TLE extension. To uninstall all versions of a TLE extension, see pgtle.uninstall_extension(name).

Function prototype

```
pgtle.uninstall_extension(extname text, version text)
```

Role

`pgtle_admin`

Arguments

- `extname` – The name of the TLE extension. This value is used when calling `CREATE EXTENSION`.
- `version` – The version of the TLE extension to uninstall from the database.

Output

None.

Usage example

```
SELECT * FROM pgtle.uninstall_extension('pg_tle_test', '0.2');
```

pgtle.uninstall_extension_if_exists

The `uninstall_extension_if_exists` function removes all versions of a TLE extension from a given database. If the TLE extension doesn't exist, the function returns silently (no error message is raised). If the specified extension is currently active within a database, this function doesn't drop it. You must explicitly call `DROP EXTENSION` to remove the TLE extension before using this function to uninstall its artifacts.

Function prototype

```
pgtle.uninstall_extension_if_exists(extname text)
```

Role

`pgtle_admin`

Arguments

- `extname` – The name of the TLE extension. This value is used when calling `CREATE EXTENSION`.

Output

The `uninstall_extension_if_exists` function returns `true` after uninstalling the specified extension. If the specified extension doesn't exist, the function returns `false`.

- `true` – Returns `true` after uninstalling the TLE extension.
- `false` – Returns `false` when the TLE extension doesn't exist in the database.

Usage example

```
SELECT * FROM pgtle.uninstall_extension_if_exists('pg_tle_test');
```

pgtle.uninstall_update_path

The `uninstall_update_path` function removes the specific update path from a TLE extension. This prevents `ALTER EXTENSION ... UPDATE TO` from using this as an update path.

If the TLE extension is currently being used by one of the versions on this update path, it remains in the database.

If the update path specified doesn't exist, this function raises an error.

Function prototype

```
pgtle.uninstall_update_path(extname text, fromvers text, tovers text)
```

Role

`pgtle_admin`

Arguments

- `extname` – The name of the TLE extension. This value is used when calling `CREATE EXTENSION`.
- `fromvers` – The source version of the TLE extension used on the update path.
- `tovers` – The destination version of the TLE extension used on the update path.

Output

None.

Usage example

```
SELECT * FROM pgtle.uninstall_update_path('pg_tle_test', '0.1', '0.2');
```

pgtle.uninstall_update_path_if_exists

The `uninstall_update_path_if_exists` function is similar to `uninstall_update_path` in that it removes the specified update path from a TLE extension. However, if the update path doesn't exist, this function doesn't raise an error message. Instead, the function returns `false`.

Function prototype

```
pgtle.uninstall_update_path_if_exists(extname text, fromvers text, tovers text)
```

Role

`pgtle_admin`

Arguments

- `extname` – The name of the TLE extension. This value is used when calling `CREATE EXTENSION`.
- `fromvers` – The source version of the TLE extension used on the update path.
- `tovers` – The destination version of the TLE extension used on the update path.

Output

- `true` – The function has successfully updated the path for the TLE extension.
- `false` – The function wasn't able to update the path for the TLE extension.

Usage example

```
SELECT * FROM pgtle.uninstall_update_path_if_exists('pg_tle_test', '0.1', '0.2');
```

pgtle.unregister_feature

The `unregister_feature` function provides a way to remove functions that were registered to use `pg_tle` features, such as hooks. For information about registering a feature, see pgtle.register_feature.

Function prototype

```
pgtle.unregister_feature(proc regproc, feature pg_tle_features)
```

Role

`pgtle_admin`

Arguments

- `proc` – The name of a stored function to register with a `pg_tle` feature.
- `feature` – The name of the `pg_tle` feature to register with the function. For example, `passcheck` is a feature that can be registered for use by the trusted language extensions that you develop. For more information, see Password-check hook (passcheck).

Output

None.

Usage example

```
SELECT * FROM pgtle.unregister_feature('pw_hook', 'passcheck');
```

pgtle.unregister_feature_if_exists

The `unregister_feature` function provides a way to remove functions that were registered to use `pg_tle` features, such as hooks. For more information, see Using PostgreSQL hooks with your TLE extensions. Returns `true` after successfully unregistering the feature. Returns `false` if the feature wasn't registered.

For information about registering `pg_tle` features for your TLE extensions, see pgtle.register_feature.

Function prototype

```
pgtle.unregister_feature_if_exists('proc regproc', 'feature pg_tle_features')
```

Role

`pgtle_admin`

Arguments

- `proc` – The name of the stored function that was registered to include a `pg_tle` feature.
- `feature` – The name of the `pg_tle` feature that was registered with the trusted language extension.

Output

Returns `true` or `false`, as follows.

- `true` – The function has successfully unregistered the feature from extension.
- `false` – The function wasn't able to unregister the feature from the TLE extension.

Usage example

```
SELECT * FROM pgtle.unregister_feature_if_exists('pw_hook', 'passcheck');
```

Hooks reference for Trusted Language Extensions for PostgreSQL

Trusted Language Extensions for PostgreSQL supports PostgreSQL hooks. A *hook* is an internal callback mechanism available to developers for extending PostgreSQL's core functionality. By using hooks, developers can implement their own functions or procedures for use during various database operations, thereby modifying PostgreSQL's behavior in some way. For example, you can use a `passcheck` hook to customize how PostgreSQL handles the passwords supplied when creating or changing passwords for users (roles).

View the following documentation to learn about the passcheck hook available for your TLE extensions. To learn more about the available hooks including the client authentication hook, see Trusted Language Extensions hooks.

Password-check hook (passcheck)

The `passcheck` hook is used to customize PostgreSQL behavior during the password-checking process for the following SQL commands and `psql` metacommand.

- `CREATE ROLE` *`username`* `...PASSWORD` – For more information, see CREATE ROLE in the PostgreSQL documentation.
- `ALTER ROLE` *`username`*`...PASSWORD` – For more information, see ALTER ROLE in the PostgreSQL documentation.
- `\password` *`username`* – This interactive `psql` metacommand securely changes the password for the specified user by hashing the password before transparently using the `ALTER ROLE ... PASSWORD` syntax. The metacommand is a secure wrapper for the `ALTER ROLE ... PASSWORD` command, thus the hook applies to the behavior of the `psql` metacommand.

For an example, see Password-check hook code listing.

Contents

- Function prototype
- Arguments

- Configuration
- Usage notes

Function prototype

```
passcheck_hook(username text, password text, password_type pgtle.password_types,
 valid_until timestamptz, valid_null boolean)
```

Arguments

A `passcheck` hook function takes the following arguments.

- `username` – The name (as text) of the role (username) that's setting a password.
- `password` – The plaintext or hashed password. The password entered should match the type specified in `password_type`.
- `password_type` – Specify the `pgtle.password_type` format of the password. This format can be one of the following options.
  - `PASSWORD_TYPE_PLAINTEXT` – A plaintext password.
  - `PASSWORD_TYPE_MD5` – A password that's been hashed using MD5 (message digest 5) algorithm.
  - `PASSWORD_TYPE_SCRAM_SHA_256` – A password that's been hashed using SCRAM-SHA-256 algorithm.
- `valid_until` – Specify the time when the password becomes invalid. This argument is optional. If you use this argument, specify the time as a `timestamptz` value.
- `valid_null` – If this Boolean is set to `true`, the `valid_until` option is set to `NULL`.

Configuration

The function `pgtle.enable_password_check` controls whether the passcheck hook is active. The passcheck hook has three possible settings.

- `off` – Turns off the `passcheck` password-check hook. This is the default value.
- on – Turns on the `passcode` password-check hook so that passwords are checked against the table.
- `require` – Requires a password check hook to be defined.

Usage notes

To turn the `passcheck` hook on or off, you need to modify the custom DB parameter group for the writer instance of your Aurora PostgreSQL DB cluster.

For Linux, macOS, or Unix:

```
aws rds modify-db-parameter-group \
    --region aws-region \
    --db-parameter-group-name your-custom-parameter-group \
    --parameters
 "ParameterName=pgtle.enable_password_check,ParameterValue=on,ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-parameter-group ^
    --region aws-region ^
    --db-parameter-group-name your-custom-parameter-group ^
    --parameters
 "ParameterName=pgtle.enable_password_check,ParameterValue=on,ApplyMethod=immediate"
```

Amazon Aurora PostgreSQL reference

In the following topics, you can find information about collations, functions, parameters, and wait events in Amazon Aurora PostgreSQL.

Topics

- Aurora PostgreSQL collations for EBCDIC and other mainframe migrations
- Collations supported in Aurora PostgreSQL
- Aurora PostgreSQL functions reference
- Amazon Aurora PostgreSQL parameters
- Amazon Aurora PostgreSQL wait events

Aurora PostgreSQL collations for EBCDIC and other mainframe migrations

Migrating mainframe applications to new platforms such as Amazon ideally preserves application behavior. To preserve application behavior on a new platform exactly as it was on the mainframe requires that migrated data be collated using the same collation and sorting rules. For example, many Db2 migration solutions shift null values to u0180 (Unicode position 0180), so these collations sort u0180 first. This is one example of how collations can vary from their mainframe source and why it's necessary to choose a collation that better maps to the original EBCDIC collation.

Aurora PostgreSQL 14.3 and higher versions provide many ICU and EBCDIC collations to support such migration to Amazon using the Amazon Mainframe Modernization service. To learn more about this service, see What is Amazon Mainframe Modernization?

In the following table, you can find Aurora PostgreSQL–provided collations. These collations follow EBCDIC rules and ensure that mainframe applications function the same on Amazon as they did in the mainframe environment. The collation name includes the relevant code page, (cp*nnnn*), so that you can choose the appropriate collation for your mainframe source. For example, use `en-US-cp037-x-icu` for to achieve the collation behavior for EBCDIC data that originated from a mainframe application that used code page 037.

EBCDIC collations	Amazon Blu Age collations	Amazon Micro Focus collations
da-DK-cp1142-x-icu	da-DK-cp1142b-x-icu	da-DK-cp1142m-x-icu
da-DK-cp277-x-icu	da-DK-cp277b-x-icu	–
de-DE-cp1141-x-icu	de-DE-cp1141b-x-icu	de-DE-cp1141m-x-icu
de-DE-cp273-x-icu	de-DE-cp273b-x-icu	–
en-GB-cp1146-x-icu	en-GB-cp1146b-x-icu	en-GB-cp1146m-x-icu
en-GB-cp285-x-icu	en-GB-cp285b-x-icu	–
en-US-cp037-x-icu	en-US-cp037b-x-icu	–
en-US-cp1140-x-icu	en-US-cp1140b-x-icu	en-US-cp1140m-x-icu
es-ES-cp1145-x-icu	es-ES-cp1145b-x-icu	es-ES-cp1145m-x-icu
es-ES-cp284-x-icu	es-ES-cp284b-x-icu	–
fi-FI-cp1143-x-icu	fi-FI-cp1143b-x-icu	fi-FI-cp1143m-x-icu
fi-FI-cp278-x-icu	fi-FI-cp278b-x-icu	–
fr-FR-cp1147-x-icu	fr-FR-cp1147b-x-icu	fr-FR-cp1147m-x-icu
fr-FR-cp297-x-icu	fr-FR-cp297b-x-icu	–
it-IT-cp1144-x-icu	it-IT-cp1144b-x-icu	it-IT-cp1144m-x-icu
it-IT-cp280-x-icu	it-IT-cp280b-x-icu	–
nl-BE-cp1148-x-icu	nl-BE-cp1148b-x-icu	nl-BE-cp1148m-x-icu
nl-BE-cp500-x-icu	nl-BE-cp500b-x-icu	–

To learn more about Amazon Blu Age, see Tutorial: Managed Runtime for Amazon Blu Age in the *Amazon Mainframe Modernization User Guide*.

For more information about working with Amazon Micro Focus, see Tutorial: Managed Runtime for Micro Focus in the *Amazon Mainframe Modernization User Guide*.

For more information about managing collations in PostgreSQL, see Collation Support in the PostgreSQL documentation.

Collations supported in Aurora PostgreSQL

Collations are set of rules that determine how character strings stored in the database are sorted and compared. Collations play a fundamental role in the computer system and are included as part of the operating system. Collations change over time when new characters are added to languages or when ordering rules change.

Collation libraries define specific rules and algorithms for a collation. The most popular collation libraries used within PostgreSQL are GNU C (glibc) and Internationalization components for Unicode (ICU). By default, Aurora PostgreSQL uses the glibc collation that includes unicode character sort orders for multi-byte character sequences.

When you create a new Aurora PostgreSQL DB cluster, it checks the operating system for the available collation. The PostgreSQL parameters of the `CREATE DATABASE` command `LC_COLLATE` and `LC_CTYPE` are used to specify a collation, which stands as the default collation in that database. Alternatively, you can also use the `LOCALE` parameter in `CREATE DATABASE` to set these parameters. This determines the default collation for character strings in the database and the rules for classifying characters as letters, numbers, or symbols. You can also choose a collation to use on a column, index, or on a query.

Aurora PostgreSQL depends on the glibc library in the operating system for collation support. Aurora PostgreSQL instance is periodically updated with the latest versions of the operating system. These updates sometimes include a newer version of the glibc library. Rarely, newer versions of glibc change the sort order or collation of some characters, which can cause the data to sort differently or produce invalid index entries. If you discover sort order issues for collation during an update, you might need to rebuild the indexes.

To reduce the possible impacts of the glibc updates, Aurora PostgreSQL now includes an independent default collation library. This collation library is available in Aurora PostgreSQL 14.6, 13.9, 12.13, 11.18 and newer minor version releases. It is compatible with glibc 2.26-59.amzn2, and provides sort order stability to prevent incorrect query results.

Aurora PostgreSQL functions reference

Following, you can find a list of Aurora PostgreSQL functions that are available for your Aurora DB clusters that run the Aurora PostgreSQL-Compatible Edition DB engine. These Aurora PostgreSQL functions are in addition to the standard PostgreSQL functions. For more information about standard PostgreSQL functions, see PostgreSQL–Functions and Operators.

Overview

You can use the following functions for Amazon RDS DB instances running Aurora PostgreSQL:

- aurora_db_instance_identifier
- aurora_ccm_status
- aurora_global_db_instance_status
- aurora_global_db_status
- aurora_list_builtins
- aurora_replica_status
- aurora_stat_activity
- aurora_stat_backend_waits
- aurora_stat_bgwriter
- aurora_stat_database
- aurora_stat_dml_activity
- aurora_stat_get_db_commit_latency
- aurora_stat_logical_wal_cache
- aurora_stat_memctx_usage
- aurora_stat_optimized_reads_cache
- aurora_stat_plans
- aurora_stat_reset_wal_cache
- aurora_stat_statements
- aurora_stat_system_waits
- aurora_stat_wait_event
- aurora_stat_wait_type
- aurora_version

- aurora_volume_logical_start_lsn
- aurora_wait_report

aurora_db_instance_identifier

Reports the name of the DB instance name to which you're connected.

Syntax

```
aurora_db_instance_identifier()
```

Arguments

None

Return type

VARCHAR string

Usage notes

This function displays the name of Aurora PostgreSQL-Compatible Edition cluster's DB instance for your database client or application connection.

This function is available starting with the release of Aurora PostgreSQL versions 13.7, 12.11, 11.16, 10.21 and for all other later versions.

Examples

The following example shows results of calling the `aurora_db_instance_identifier` function.

```
=> SELECT aurora_db_instance_identifier();
aurora_db_instance_identifier
------------------------------
 test-my-instance-name
```

You can join the results of this function with the `aurora_replica_status` function to obtain details about the DB instance for your connection. The aurora_replica_status alone doesn't provide show you which DB instance you're using. The following example shows you how.

```
=> SELECT *
```

```
    FROM aurora_replica_status() rt,
         aurora_db_instance_identifier() di
    WHERE rt.server_id = di;
-[ RECORD 1 ]----------------------+----------------------
server_id                          | test-my-instance-name
session_id                         | MASTER_SESSION_ID
durable_lsn                        | 88492069
highest_lsn_rcvd                   |
current_read_lsn                   |
cur_replay_latency_in_usec         |
active_txns                        |
is_current                         | t
last_transport_error               | 0
last_error_timestamp               |
last_update_timestamp              | 2022-06-03 11:18:25+00
feedback_xmin                      |
feedback_epoch                     |
replica_lag_in_msec                |
log_stream_speed_in_kib_per_second | 0
log_buffer_sequence_number         | 0
oldest_read_view_trx_id            |
oldest_read_view_lsn               |
pending_read_ios                   | 819
```

aurora_ccm_status

Displays the status of cluster cache manager.

Syntax

```
aurora_ccm_status()
```

Arguments

None.

Return type

SETOF record with the following columns:

- `buffers_sent_last_minute` – The number of buffers sent to the designated reader in the past minute.

- `buffers_found_last_minute` – The number of frequently accessed buffers identified during the past minute.
- `buffers_sent_last_scan` – The number of buffers sent to the designated reader during the last complete scan of the buffer cache.
- `buffers_found_last_scan` – The number of frequently accessed buffers sent during the last complete scan of the buffer cache. Buffers that are already cached on the designated reader aren't sent.
- `buffers_sent_current_scan` – The number of buffers sent during the current scan.
- `buffers_found_current_scan` – The number of frequently accessed buffers that were identified in the current scan.
- `current_scan_progress` – The number of buffers visited so far during the current scan.

Usage notes

You can use this function to check and monitor the cluster cache management (CCM) feature. This function works only if CCM is active on your Aurora PostgreSQL DB cluster. To use this function you connect to the Write DB instance on your Aurora PostgreSQL DB cluster.

You turn on CCM for an Aurora PostgreSQL DB cluster by setting the `apg_ccm_enabled` to 1 in the cluster's custom DB cluster parameter group. To learn how, see Configuring cluster cache management.

Cluster cache management is active on an Aurora PostgreSQL DB cluster when the cluster has an Aurora Reader instance configured as follows:

- The Aurora Reader instance uses same DB instance class type and size as the cluster's Writer instance.
- The Aurora Reader instance is configured as Tier-0 for the cluster. If the cluster has more than one Reader, this is its only Tier-0 Reader.

Setting more than one Reader to Tier-0 disables CCM. When CCM is disabled, calling this function returns the following error message:

```
ERROR: Cluster Cache Manager is disabled
```

You can also the PostgreSQL pg_buffercache extension to analyze the buffer cache. For more information, see pg_buffercache in the PostgreSQL documentation.

For more information, see Introduction to Aurora PostgreSQL cluster cache management.

Examples

The following example shows the results of calling the `aurora_ccm_status` function. This first example shows CCM statistics.

```
=> SELECT * FROM aurora_ccm_status();
 buffers_sent_last_minute | buffers_found_last_minute | buffers_sent_last_scan |
 buffers_found_last_scan | buffers_sent_current_scan | buffers_found_current_scan |
 current_scan_progress
--------------------------+---------------------------+------------------------
+-------------------------+---------------------------+----------------------------
+------------------------
                   2242000 |                   2242003 |               17920442 |
         17923410 |                  14098000 |                  14100964 |
   15877443
```

For more complete detail, you can use expanded display, as shown following:

```
\x
Expanded display is on.
SELECT *  FROM aurora_ccm_status();
[ RECORD 1 ]----------------------+---------
buffers_sent_last_minute          | 2242000
buffers_found_last_minute         | 2242003
buffers_sent_last_scan            | 17920442
buffers_found_last_scan           | 17923410
buffers_sent_current_scan         | 14098000
buffers_found_current_scan        | 14100964
current_scan_progress             | 15877443
```

This example shows how to check warm rate and warm percentage.

```
=> SELECT buffers_sent_last_minute * 8/60 AS warm_rate_kbps,
100 * (1.0-buffers_sent_last_scan/buffers_found_last_scan) AS warm_percent
FROM aurora_ccm_status ();
 warm_rate_kbps | warm_percent
----------------+--------------
 16523 |        100.0
```

aurora_global_db_instance_status

Displays the status of all Aurora instances, including replicas in an Aurora global DB cluster.

Syntax

```
aurora_global_db_instance_status()
```

Arguments

None

Return type

SETOF record with the following columns:

- `server_id` – The identifier of the DB instance.
- `session_id` – A unique identifier for the current session. A value of `MASTER_SESSION_ID` identifies the Writer (primary) DB instance.
- `aws_region` – The Amazon Web Services Region in which this global DB instance runs. For a list of Regions, see Region availability.
- `durable_lsn` – The log sequence number (LSN) made durable in storage. A log sequence number (LSN) is a unique sequential number that identifies a record in the database transaction log. LSNs are ordered such that a larger LSN represents a later transaction.
- `highest_lsn_rcvd` – The highest LSN received by the DB instance from the writer DB instance.
- `feedback_epoch` – The epoch that the DB instance uses when it generates hot standby information. A *hot standby* is a DB instance that supports connections and queries while the primary DB is in recovery or standby mode. The hot standby information includes the epoch (point in time) and other details about the DB instance that's being used as a hot standby. For more information, see Hot Standby in the PostgreSQL documentation.
- `feedback_xmin` – The minimum (oldest) active transaction ID used by the DB instance.
- `oldest_read_view_lsn` – The oldest LSN used by the DB instance to read from storage.
- `visibility_lag_in_msec` – How far this DB instance is lagging behind the writer DB instance in milliseconds.

Usage notes

This function shows replication statistics for an Aurora DB cluster. For each Aurora PostgreSQL DB instance in the cluster, the function shows a row of data that includes any cross-Region replicas in a global database configuration.

You can run this function from any instance in an Aurora PostgreSQL DB cluster or an Aurora PostgreSQL global database. The function returns details about lag for all replica instances.

To learn more about monitoring lag using this function (`aurora_global_db_instance_status`) or by using using `aurora_global_db_status`, see Monitoring Aurora PostgreSQL-based global databases.

For more information about Aurora global databases, see Overview of Amazon Aurora Global Database.

To get started with Aurora global databases, see Getting started with Amazon Aurora Global Database or see Amazon Aurora FAQs.

Examples

This example shows cross-Region instance stats.

```
=> SELECT *
  FROM aurora_global_db_instance_status();
               server_id                |              session_id              |
  aws_region  | durable_lsn | highest_lsn_rcvd | feedback_epoch | feedback_xmin |
 oldest_read_view_lsn | visibility_lag_in_msec
----------------------------------------+--------------------------------------
+-------------+------------+------------------+----------------+---------------
+----------------------+-----------------------
 db-119-001-instance-01                  | MASTER_SESSION_ID                    | eu-
west-1    |  2534560273 |           [NULL] |         [NULL] |        [NULL] |
     [NULL] |                [NULL]
 db-119-001-instance-02                  | 4ecff34d-d57c-409c-ba28-278b31d6fc40 | eu-
west-1    |  2534560266 |       2534560273 |              0 |      19669196 |
 2534560266 |                     6
 db-119-001-instance-03                  | 3e8a20fc-be86-43d5-95e5-bdf19d27ad6b | eu-
west-1    |  2534560266 |       2534560273 |              0 |      19669196 |
 2534560266 |                     6
 db-119-001-instance-04                  | fc1b0023-e8b4-4361-bede-2a7e926cead6 | eu-
west-1    |  2534560266 |       2534560273 |              0 |      19669196 |
 2534560254 |                    23
```

```
 db-119-001-instance-05                   | 30319b74-3f08-4e13-9728-e02aa1aa8649 | eu-
west-1    |  2534560266 |       2534560273 |              0 |      19669196 |
 2534560254 |                      23
 db-119-001-global-instance-1             | a331ffbb-d982-49ba-8973-527c96329c60 | eu-
central-1 |  2534560254 |       2534560266 |              0 |      19669196 |
 2534560247 |                     996
 db-119-001-global-instance-1             | e0955367-7082-43c4-b4db-70674064a9da | eu-
west-2    |  2534560254 |       2534560266 |              0 |      19669196 |
 2534560247 |                      14
 db-119-001-global-instance-1-eu-west-2a  | 1248dc12-d3a4-46f5-a9e2-85850491a897 | eu-
west-2    |  2534560254 |       2534560266 |              0 |      19669196 |
 2534560247 |                       0
```

This example shows how to check global replica lag in milliseconds.

```
=> SELECT CASE
          WHEN 'MASTER_SESSION_ID' = session_id THEN 'Primary'
         ELSE 'Secondary'
      END AS global_role,
      aws_region,
      server_id,
      visibility_lag_in_msec
  FROM aurora_global_db_instance_status()
  ORDER BY 1, 2, 3;
   global_role |  aws_region  |               server_id                |
 visibility_lag_in_msec
-------------+--------------+----------------------------------------
+------------------------
 Primary     | eu-west-1    | db-119-001-instance-01                 |
 [NULL]
 Secondary   | eu-central-1 | db-119-001-global-instance-1           |
     13
 Secondary   | eu-west-1    | db-119-001-instance-02                 |
     10
 Secondary   | eu-west-1    | db-119-001-instance-03                 |
      9
 Secondary   | eu-west-1    | db-119-001-instance-04                 |
      2
 Secondary   | eu-west-1    | db-119-001-instance-05                 |
     18
 Secondary   | eu-west-2    | db-119-001-global-instance-1           |
     14
```

```
 Secondary   | eu-west-2    | db-119-001-global-instance-1-eu-west-2a |
     13
```

This example shows how to check min, max and average lag per Amazon Web Services Region from the global database configuration.

```
=> SELECT 'Secondary' global_role,
       aws_region,
       min(visibility_lag_in_msec) min_lag_in_msec,
       max(visibility_lag_in_msec) max_lag_in_msec,
       round(avg(visibility_lag_in_msec),0) avg_lag_in_msec
  FROM aurora_global_db_instance_status()
 WHERE aws_region NOT IN (SELECT   aws_region
                            FROM aurora_global_db_instance_status()
                           WHERE session_id='MASTER_SESSION_ID')
                        GROUP BY aws_region
UNION ALL
SELECT  'Primary' global_role,
        aws_region,
        NULL,
        NULL,
        NULL
    FROM aurora_global_db_instance_status()
   WHERE session_id='MASTER_SESSION_ID'
ORDER BY 1, 5;
 global_role |  aws_region  | min_lag_in_msec | max_lag_in_msec | avg_lag_in_msec
-------------+--------------+-----------------+-----------------+-----------------
 Primary     | eu-west-1    |          [NULL] |          [NULL] |          [NULL]
 Secondary   | eu-central-1 |             133 |             133 |             133
 Secondary   | eu-west-2    |               0 |             495 |             248
```

aurora_global_db_status

Displays information about various aspects of Aurora global database lag, specifically, lag of the underlying Aurora storage (so called durability lag) and lag between the recovery point objective (RPO).

Syntax

```
aurora_global_db_status()
```

Arguments

None.

Return type

SETOF record with the following columns:

- `aws_region` – The Amazon Web Services Region that this DB cluster is in. For a complete listing of Amazon Web Services Regions by engine, see Regions and Availability Zones.
- `highest_lsn_written` – The highest log sequence number (LSN) that currently exists on this DB cluster. A log sequence number (LSN) is a unique sequential number that identifies a record in the database transaction log. LSNs are ordered such that a larger LSN represents a later transaction.
- `durability_lag_in_msec` – The difference in the timestamp values between the `highest_lsn_written` on a secondary DB cluster and the `highest_lsn_written` on the primary DB cluster. A value of -1 identifies the primary DB cluster of the Aurora global database.
- `rpo_lag_in_msec` – The recovery point objective (RPO) lag. The RPO lag is the time it takes for the most recent user transaction COMMIT to be stored on a secondary DB cluster after it's been stored on the primary DB cluster of the Aurora global database. A value of -1 denotes the primary DB cluster (and thus, lag isn't relevant).

  In simple terms, this metric calculates the recovery point objective for each Aurora PostgreSQL DB cluster in the Aurora global database, that is, how much data might be lost if there were an outage. As with lag, RPO is measured in time.
- `last_lag_calculation_time` – The timestamp that specifies when values were last calculated for `durability_lag_in_msec` and `rpo_lag_in_msec`. A time value such as `1970-01-01 00:00:00+00` means this is the primary DB cluster.
- `feedback_epoch` – The epoch that the secondary DB cluster uses when it generates hot standby information. A *hot standby* is a DB instance that supports connections and queries while the primary DB is in recovery or standby mode. The hot standby information includes the epoch (point in time) and other details about the DB instance that's being used as a hot standby. For more information, see Hot Standby in the PostgreSQL documentation.
- `feedback_xmin` – The minimum (oldest) active transaction ID used by a secondary DB cluster.

Usage notes

All currently available Aurora PostgreSQL versions support this function. This function shows replication statistics for an Aurora global database. It shows one row for each DB cluster in an Aurora PostgreSQL global database. You can run this function from any instance in your Aurora PostgreSQL global database.

To evaluate Aurora global database replication lag, which is the visible data lag, see aurora_global_db_instance_status.

To learn more about using `aurora_global_db_status` and `aurora_global_db_instance_status` to monitor Aurora global database lag, see Monitoring Aurora PostgreSQL-based global databases. For more information about Aurora global databases, see Overview of Amazon Aurora Global Database.

Examples

This example shows how to display cross-region storage statistics.

```
=> SELECT CASE
          WHEN '-1' = durability_lag_in_msec THEN 'Primary'
          ELSE 'Secondary'
       END AS global_role,
       *
  FROM aurora_global_db_status();
 global_role | aws_region | highest_lsn_written | durability_lag_in_msec |
 rpo_lag_in_msec | last_lag_calculation_time  | feedback_epoch | feedback_xmin
-------------+------------+---------------------+------------------------
+-----------------+----------------------------+----------------+---------------
 Primary     | eu-west-1  |           131031557 |                     -1 |
 -1 | 1970-01-01 00:00:00+00     |             0 |              0
 Secondary   | eu-west-2  |           131031554 |                    410 |
  0 | 2021-06-01 18:59:36.124+00 |             0 |         12640
 Secondary   | eu-west-3  |           131031554 |                    410 |
  0 | 2021-06-01 18:59:36.124+00 |             0 |         12640
```

aurora_list_builtins

Lists all available Aurora PostgreSQL built-in functions, along with brief descriptions and function details.

Syntax

```
aurora_list_builtins()
```

Arguments

None

Return type

SETOF record

Examples

The following example shows results from calling the `aurora_list_builtins` function.

```
=> SELECT *
FROM aurora_list_builtins();

               Name                | Result data type |                    Argument data
 types                     | Type | Volatility |  Parallel  | Security |
             Description
-----------------------------------+------------------
+-------------------------------------------------------------+------+------------
+------------+----------
+-------------------------------------------------------------------------
 aurora_version                    | text             |
                           | func | stable     | safe       | invoker  | Amazon Aurora
 PostgreSQL-Compatible Edition version string
 aurora_stat_wait_type             | SETOF record     | OUT type_id smallint, OUT
 type_name text                 | func | volatile   | restricted | invoker  | Lists all
 supported wait types
 aurora_stat_wait_event            | SETOF record     | OUT type_id smallint, OUT
 event_id integer, OUT event_na.| func | volatile   | restricted | invoker  | Lists all
 supported wait events
                                   |                  |.me text
                           |      |            |            |          |
 aurora_list_builtins              | SETOF record     | OUT "Name" text, OUT "Result
 data type" text, OUT "Argum.| func | stable     | safe       | invoker  | Lists all
 Aurora built-in functions
                                   |                  |.ent data types" text, OUT
 "Type" text, OUT "Volatility" .|      |            |            |          |
                                   |                  |.text, OUT "Parallel" text, OUT
 "Security" text, OUT "Des.|      |            |            |          |
```

```
                                  |                 |.cription" text
                        |      |           |           |          |
.
.
.
aurora_stat_file                  | SETOF record     | OUT filename text, OUT
allocated_bytes bigint, OUT used_.| func | stable     | safe       | invoker  | Lists
all files present in Aurora storage
                                  |                 |.bytes bigint
                        |      |           |           |          |
aurora_stat_get_db_commit_latency | bigint           | oid
                         | func | stable     | restricted | invoker  | Per DB commit
latency in microsecs
```

aurora_replica_status

Displays the status of all Aurora PostgreSQL reader nodes.

Syntax

```
aurora_replica_status()
```

Arguments

None

Return type

SETOF record with the following columns:

- `server_id` – The DB instance ID (identifier).
- `session_id` – A unique identifier for the current session, returned for primary instance and reader instances as follows:
  - For the primary instance, `session_id` is always `` `MASTER_SESSION_ID' ``.
  - For reader instances, `session_id` is always the `UUID` (universally unique identifier) of the reader instance.
- `durable_lsn` – The log sequence number (LSN) that's been saved in storage.
  - For the primary volume, the primary volume durable LSN (VDL) that's currently in effect.
  - For any secondary volumes, the latest VDL observed from the primary.

> **Note**
>
> A log sequence number (LSN) is a unique sequential number that identifies a record in the database transaction log. LSNs are ordered such that a larger LSN represents a transaction that's occurred later in the sequence.

- `highest_lsn_rcvd` – The highest (most recent) LSN received by the DB instance from the writer DB instance.
- `current_read_lsn` – For a reader, its most recently applied LSN. On the writer, this is NULL.
- `cur_replay_latency_in_usec` – The number of microseconds that it's expected to take to replay the log on the secondary.
- `active_txns` – The number of currently active transactions.
- `is_current` – Not used.
- `last_transport_error` – Last replication error code.
- `last_error_timestamp` – Timestamp of last replication error.
- `last_update_timestamp` – Timestamp of last update to replica status. From Aurora PostgreSQL 13.9, the `last_update_timestamp` value for the DB instance that you are connected to is set to `NULL`.
- `feedback_xmin` – The hot standby feedback_xmin of the replica. The minimum (oldest) active transaction ID used by the DB instance.
- `feedback_epoch` – The epoch the DB instance uses when it generates hot standby information.
- `replica_lag_in_msec` – Time that reader instance lags behind writer instance, in milliseconds.
- `log_stream_speed_in_kib_per_second` – The log stream throughput in kilobytes per second.
- `log_buffer_sequence_number` – The log buffer sequence number.
- `oldest_read_view_trx_id` – Not used.
- `oldest_read_view_lsn` – The oldest LSN used by the DB instance to read from storage.
- `pending_read_ios` – The outstanding page reads that are still pending on replica.
- `read_ios` – The total number of page reads on replica.
- `iops` – Not used.
- `cpu` – CPU usage of the Aurora Storage Daemon for each node in the cluster. For information about CPU usage by the instance, see Instance-level metrics for Amazon Aurora.

Usage notes

All currently available Aurora PostgreSQL versions support this function. The `aurora_replica_status` function returns values from an Aurora PostgreSQL DB cluster's replica status manager. You can use this function to obtain information about the status of replication on your Aurora PostgreSQL DB cluster, including metrics for all DB instances in your Aurora DB cluster. For example, you can do the following:

- **Get information about the type of instance (writer, reader) in the Aurora PostgreSQL DB cluster** – You can obtain this information by checking the values of the following columns:
  - `server_id` – Contains the name of the instance that you specified when you created the instance. In some cases, such as for the primary (writer) instance, the name is typically created for you by appending *-instance-1* to the name that you create for your Aurora PostgreSQL DB cluster.
  - `session_id` – The `session_id` field indicates whether the instance is a reader or a writer. For a writer instance, `session_id` is always set to `"MASTER_SESSION_ID"`. For a reader instance, `session_id` is set to the `UUID` of the specific reader.
- **Diagnose common replication issues, such as replica lag** – Replica lag is the time in milliseconds that the page cache of a reader instance is behind that of the writer instance. This lag occurs because Aurora clusters use asynchronous replication, as described in Replication with Amazon Aurora. It's shown in the `replica_lag_in_msec` column in the results returned by this function. Lag can also occur when a query is cancelled due to conflicts with recovery on a standby server. You can check `pg_stat_database_conflicts()` to verify that such a conflict is causing the replica lag (or not). For more information, see The Statistics Collector in the *PostgreSQL documentation*. To learn more about high availability and replication, see Amazon Aurora FAQs.

  Amazon CloudWatch stores `replica_lag_in_msec` results over time, as the `AuroraReplicaLag` metric. For information about using CloudWatch metrics for Aurora, see Monitoring Amazon Aurora metrics with Amazon CloudWatch

To learn more about troubleshooting Aurora read replicas and restarts, see Why did my Amazon Aurora read replica fall behind and restart? in the Amazon Web Services Support Center.

Examples

The following example shows how to get the replication status of all instances in an Aurora PostgreSQL DB cluster:

```
=> SELECT *
FROM aurora_replica_status();
```

The following example shows the writer instance in the `docs-lab-apg-main` Aurora PostgreSQL DB cluster:

```
=> SELECT server_id,
    CASE
        WHEN 'MASTER_SESSION_ID' = session_id THEN 'writer'
        ELSE 'reader'
    END AS instance_role
FROM aurora_replica_status()
WHERE session_id = 'MASTER_SESSION_ID';
        server_id       | instance_role
------------------------+---------------
 db-119-001-instance-01 | writer
```

The following example example lists all reader instances in a cluster:

```
=> SELECT server_id,
    CASE
        WHEN 'MASTER_SESSION_ID' = session_id THEN 'writer'
        ELSE 'reader'
    END AS instance_role
FROM aurora_replica_status()
WHERE session_id <> 'MASTER_SESSION_ID';
        server_id       | instance_role
------------------------+---------------
db-119-001-instance-02  | reader
db-119-001-instance-03  | reader
db-119-001-instance-04  | reader
db-119-001-instance-05  | reader
(4 rows)
```

The following example lists all instances, how far each instance is lagging behind the writer, and how long since the last update:

```
=> SELECT server_id,
    CASE
        WHEN 'MASTER_SESSION_ID' = session_id THEN 'writer'
        ELSE 'reader'
    END AS instance_role,
    replica_lag_in_msec AS replica_lag_ms,
    round(extract (epoch FROM (SELECT age(clock_timestamp(), last_update_timestamp))) *
 1000) AS last_update_age_ms
FROM aurora_replica_status()
ORDER BY replica_lag_in_msec NULLS FIRST;
       server_id        | instance_role | replica_lag_ms | last_update_age_ms
------------------------+---------------+----------------+--------------------
 db-124-001-instance-03 | writer        |         [NULL] |               1756
 db-124-001-instance-01 | reader        |             13 |               1756
 db-124-001-instance-02 | reader        |             13 |               1756
(3 rows)
```

aurora_stat_activity

Returns one row per server process, showing information related to the current activity of that process.

Syntax

```
aurora_stat_activity();
```

Arguments

None

Return type

Returns one row per server process. In additional to `pg_stat_activity` columns, the following field is added:

- planid – plan identifier

Usage notes

A supplementary view to `pg_stat_activity` returning the same columns with an additional `plan_id` column which shows the current query execution plan.

`aurora_compute_plan_id` must be enabled for the view to return a plan_id.

This function is available from Aurora PostgreSQL versions 14.10, 15.5, and for all other later versions.

Examples

The example query below aggregates the top load by query_id and plan_id.

```
db1=# select count(*), query_id, plan_id
db1-# from aurora_stat_activity() where state = 'active'
db1-# and pid <> pg_backend_pid()
db1-# group by query_id, plan_id
db1-# order by 1 desc;

count |  query_id             |  plan_id
-------+----------------------+-------------
 11    | -5471422286312252535 | -2054628807
 3     | -6907107586630739258 | -815866029
 1     | 5213711845501580017  |  300482084
(3 rows)
```

If the plan used for query_id changes, a new plan_id will be reported by aurora_stat_activity.

```
count  |  query_id            |  plan_id
-------+----------------------+-------------
 10    | -5471422286312252535 | 1602979607
 1     | -6907107586630739258 | -1809935983
 1     | -2446282393000597155 | -207532066
(3 rows)
```

aurora_stat_backend_waits

Displays statistics for wait activity for a specific backend process.

Syntax

```
aurora_stat_backend_waits(pid)
```

Arguments

`pid` – The ID for the backend process. You can obtain process IDs by using the `pg_stat_activity` view.

Return type

SETOF record with the following columns:

- `type_id` – A number that denotes the type of wait event, such as 1 for a lightweight lock (`LWLock`), 3 for a lock, or 6 for a client session, to name some examples. These values become meaningful when you join the results of this function with columns from `aurora_stat_wait_type` function, as shown in the Examples.
- `event_id` – An identifying number for the wait event. Join this value with the columns from `aurora_stat_wait_event` to obtain meaningful event names.
- `waits` – A count of the number of waits accumulated for the specified process ID.
- `wait_time` – Wait time in milliseconds.

Usage notes

You can use this function to analyze specific backend (session) wait events that occurred since a connection opened. To get more meaningful information about wait event names and types, you can combine this function `aurora_stat_wait_type` and `aurora_stat_wait_event`, by using JOIN as shown in the examples.

Examples

This example shows all waits, types, and event names for a backend process ID 3027.

```
=> SELECT type_name, event_name, waits, wait_time
        FROM aurora_stat_backend_waits(3027)
NATURAL JOIN aurora_stat_wait_type()
NATURAL JOIN aurora_stat_wait_event();
type_name |       event_name       | waits | wait_time
----------+------------------------+-------+------------
```

```
 LWLock    | ProcArrayLock          |     3 |         27
 LWLock    | wal_insert             |   423 |      16336
 LWLock    | buffer_content         | 11840 |    1033634
 LWLock    | lock_manager           | 23821 |    5664506
 Lock      | tuple                  | 10258 |  152280165
 Lock      | transactionid          | 78340 | 1239808783
 Client    | ClientRead             | 34072 |   17616684
 IO        | ControlFileSyncUpdate  |     2 |          0
 IO        | ControlFileWriteUpdate |     4 |         32
 IO        | RelationMapRead        |     2 |        795
 IO        | WALWrite               | 36666 |      98623
 IO        | XactSync               |  4867 |    7331963
```

This example shows current and cumulative wait types and wait events for all active sessions (`pg_stat_activity state <> 'idle'`) (but without the current session that's invoking the function (`pid <> pg_backend_pid()`).

```
=> SELECT a.pid,
            a.usename,
            a.app_name,
            a.current_wait_type,
            a.current_wait_event,
            a.current_state,
            wt.type_name AS wait_type,
            we.event_name AS wait_event,
            a.waits,
            a.wait_time
       FROM (SELECT pid,
                    usename,
                    left(application_name,16) AS app_name,
                    coalesce(wait_event_type,'CPU') AS current_wait_type,
                    coalesce(wait_event,'CPU') AS current_wait_event,
                    state AS current_state,
                    (aurora_stat_backend_waits(pid)).*
               FROM pg_stat_activity
              WHERE pid <> pg_backend_pid()
                AND state <> 'idle') a
NATURAL JOIN aurora_stat_wait_type() wt
NATURAL JOIN aurora_stat_wait_event() we;
  pid  | usename  | app_name | current_wait_type | current_wait_event | current_state |
 wait_type |       wait_event       | waits | wait_time
-------+----------+----------+-------------------+--------------------+---------------
+-----------+------------------------+-------+-----------
```

```
30099 | postgres | pgbench  | Lock              | transactionid      | active        |
LWLock    | wal_insert             |  1937 |     29975
30099 | postgres | pgbench  | Lock              | transactionid      | active        |
LWLock    | buffer_content         | 22903 |    760498
30099 | postgres | pgbench  | Lock              | transactionid      | active        |
LWLock    | lock_manager           | 10012 |    223207
30099 | postgres | pgbench  | Lock              | transactionid      | active        |
Lock      | tuple                  | 20315 |  63081529
.
.
.
30099 | postgres | pgbench  | Lock              | transactionid      | active        |
IO        | WALWrite               | 93293 |    237440
30099 | postgres | pgbench  | Lock              | transactionid      | active        |
IO        | XactSync               | 13010 |  19525143
30100 | postgres | pgbench  | Lock              | transactionid      | active        |
LWLock    | ProcArrayLock          |     6 |        53
30100 | postgres | pgbench  | Lock              | transactionid      | active        |
LWLock    | wal_insert             |  1913 |     25450
30100 | postgres | pgbench  | Lock              | transactionid      | active        |
LWLock    | buffer_content         | 22874 |    778005
.
.
.
30109 | postgres | pgbench  | IO                | XactSync           | active        |
LWLock    | ProcArrayLock          |     3 |        71
30109 | postgres | pgbench  | IO                | XactSync           | active        |
LWLock    | wal_insert             |  1940 |     27741
30109 | postgres | pgbench  | IO                | XactSync           | active        |
LWLock    | buffer_content         | 22962 |    776352
30109 | postgres | pgbench  | IO                | XactSync           | active        |
LWLock    | lock_manager           |  9879 |    218826
30109 | postgres | pgbench  | IO                | XactSync           | active        |
Lock      | tuple                  | 20401 |  63581306
30109 | postgres | pgbench  | IO                | XactSync           | active        |
Lock      | transactionid          | 50769 | 211645008
30109 | postgres | pgbench  | IO                | XactSync           | active        |
Client    | ClientRead             | 89901 |  44192439
```

This example shows current and the top three (3) cumulative wait type and wait events for all active sessions (`pg_stat_activity state <> 'idle'`) excluding current session (`pid <>pg_backend_pid()`).

```
=> SELECT top3.*
       FROM (SELECT a.pid,
                    a.usename,
                    a.app_name,
                    a.current_wait_type,
                    a.current_wait_event,
                    a.current_state,
                    wt.type_name AS wait_type,
                    we.event_name AS wait_event,
                    a.waits,
                    a.wait_time,
                    RANK() OVER (PARTITION BY pid ORDER BY a.wait_time DESC)
               FROM (SELECT pid,
                            usename,
                            left(application_name,16) AS app_name,
                            coalesce(wait_event_type,'CPU') AS current_wait_type,
                            coalesce(wait_event,'CPU') AS current_wait_event,
                            state AS current_state,
                            (aurora_stat_backend_waits(pid)).*
                       FROM pg_stat_activity
                      WHERE pid <> pg_backend_pid()
                        AND state <> 'idle') a
       NATURAL JOIN aurora_stat_wait_type() wt
       NATURAL JOIN aurora_stat_wait_event() we) top3
 WHERE RANK <=3;
  pid  | usename  | app_name | current_wait_type | current_wait_event | current_state |
 wait_type |   wait_event    |  waits  | wait_time  | rank
-------+----------+----------+-------------------+--------------------+---------------
+-----------+-----------------+---------+------------+------
 20567 | postgres | psql     | CPU               | CPU                | active        |
 LWLock    | wal_insert      |   25000 |   67512003 |    1
 20567 | postgres | psql     | CPU               | CPU                | active        |
 IO        | WALWrite        | 3071758 |    1016961 |    2
 20567 | postgres | psql     | CPU               | CPU                | active        |
 IO        | BufFileWrite    |   20750 |     184559 |    3
 27743 | postgres | pgbench  | Lock              | transactionid      | active        |
 Lock      | transactionid   |  237350 | 1265580011 |    1
 27743 | postgres | pgbench  | Lock              | transactionid      | active        |
 Lock      | tuple           |   93641 |  341472318 |    2
 27743 | postgres | pgbench  | Lock              | transactionid      | active        |
 Client    | ClientRead      |  417556 |  204796837 |    3
 .
 .
```

```
.
27745 | postgres | pgbench  | IO               | XactSync          | active       |
Lock      | transactionid   |  238068 | 1265816822 |    1
27745 | postgres | pgbench  | IO               | XactSync          | active       |
Lock      | tuple           |   93210 |  338312247 |    2
27745 | postgres | pgbench  | IO               | XactSync          | active       |
Client    | ClientRead      |  419157 |  207836533 |    3
27746 | postgres | pgbench  | Lock             | transactionid     | active       |
Lock      | transactionid   |  237621 | 1264528811 |    1
27746 | postgres | pgbench  | Lock             | transactionid     | active       |
Lock      | tuple           |   93563 |  339799310 |    2
27746 | postgres | pgbench  | Lock             | transactionid     | active       |
Client    | ClientRead      |  417304 |  208372727 |    3
```

aurora_stat_bgwriter

`aurora_stat_bgwriter` is a statistics view showing information about Optimized Reads cache writes.

Syntax

```
aurora_stat_bgwriter()
```

Arguments

None

Return type

SETOF record with all `pg_stat_bgwriter` columns and the following additional columns. For more information on `pg_stat_bgwriter` columns, see `pg_stat_bgwriter`.

You can reset stats for this function using `pg_stat_reset_shared("bgwriter")`.

- `orcache_blks_written` – Total number of optimized reads cache data blocks written.
- `orcache_blk_write_time` – If `track_io_timing` is enabled, it tracks the total time spent writing optimized reads cache data file blocks, in milliseconds. For more information, see track_io_timing.

Usage notes

This function is available in the following Aurora PostgreSQL versions:

- 15.4 and higher 15 versions
- 14.9 and higher 14 versions

Examples

```
=> select * from aurora_stat_bgwriter();
-[ RECORD 1 ]-----------------+-----------
orcache_blks_written          | 246522
orcache_blk_write_time        | 339276.404
```

aurora_stat_database

It carries all columns of pg_stat_database and adds new columns in the end.

Syntax

```
aurora_stat_database()
```

Arguments

None

Return type

SETOF record with all `pg_stat_database` columns and the following additional columns. For more information on `pg_stat_database` columns, see `pg_stat_database`.

- `storage_blks_read` – Total number of shared blocks read from aurora storage in this database.
- `orcache_blks_hit` – Total number of optimized reads cache hits in this database.
- `local_blks_read` – Total number of local blocks read in this database.
- `storage_blk_read_time` – If `track_io_timing` is enabled, it tracks the total time spent reading data file blocks from aurora storage, in milliseconds, otherwise the value is zero. For more information, see track_io_timing.

- `local_blk_read_time` – If `track_io_timing` is enabled, it tracks the total time spent reading local data file blocks, in milliseconds, otherwise the value is zero. For more information, see track_io_timing.
- `orcache_blk_read_time` – If `track_io_timing` is enabled, it tracks the total time spent reading data file blocks from optimized reads cache, in milliseconds, otherwise the value is zero. For more information, see track_io_timing.

> **Note**
>
> The value of `blks_read` is the sum of `storage_blks_read`, `orcache_blks_hit`, and `local_blks_read`.
> The value of `blk_read_time` is the sum of `storage_blk_read_time`, `orcache_blk_read_time`, and `local_blk_read_time`.

Usage notes

This function is available in the following Aurora PostgreSQL versions:

- 15.4 and higher 15 versions
- 14.9 and higher 14 versions

Examples

The following example shows how it carries all the `pg_stat_database` columns and appends 6 new columns in the end:

```
=> select * from aurora_stat_database() where datid=14717;
-[ RECORD 1 ]------------+------------------------------
datid                    | 14717
datname                  | postgres
numbackends              | 1
xact_commit              | 223
xact_rollback            | 4
blks_read                | 1059
blks_hit                 | 11456
tup_returned             | 27746
tup_fetched              | 5220
```

```
tup_inserted              | 165
tup_updated               | 42
tup_deleted               | 91
conflicts                 | 0
temp_files                | 0
temp_bytes                | 0
deadlocks                 | 0
checksum_failures         |
checksum_last_failure     |
blk_read_time             | 3358.689
blk_write_time            | 0
session_time              | 1076007.997
active_time               | 3684.371
idle_in_transaction_time | 0
sessions                  | 10
sessions_abandoned        | 0
sessions_fatal            | 0
sessions_killed           | 0
stats_reset               | 2023-01-12 20:15:17.370601+00
orcache_blks_hit          | 425
orcache_blk_read_time     | 89.934
storage_blks_read         | 623
storage_blk_read_time     | 3254.914
local_blks_read           | 0
local_blk_read_time       | 0
```

aurora_stat_dml_activity

Reports cumulative activity for each type of data manipulation language (DML) operation on a database in an Aurora PostgreSQL cluster.

Syntax

```
aurora_stat_dml_activity(database_oid)
```

Arguments

database_oid

The object ID (OID) of the database in the Aurora PostgreSQL cluster.

Return type

SETOF record

Usage notes

The `aurora_stat_dml_activity` function is only available with Aurora PostgreSQL release 3.1 compatible with PostgreSQL engine 11.6 and later.

Use this function on Aurora PostgreSQL clusters with a large number of databases to identify which databases have more or slower DML activity, or both.

The `aurora_stat_dml_activity` function returns the number of times the operations ran and the cumulative latency in microseconds for SELECT, INSERT, UPDATE, and DELETE operations. The report includes only successful DML operations.

You can reset this statistic by using the PostgreSQL statistics access function `pg_stat_reset`. You can check the last time this statistic was reset by using the `pg_stat_get_db_stat_reset_time` function. For more information about PostgreSQL statistics access functions, see The Statistics Collector in the PostgreSQL documentation.

Examples

The following example shows how to report DML activity statistics for the connected database.

```
--Define the oid variable from connected database by using \gset
=> SELECT oid,
          datname
     FROM pg_database
    WHERE datname=(select current_database()) \gset
=> SELECT *
     FROM aurora_stat_dml_activity(:oid);
select_count | select_latency_microsecs | insert_count | insert_latency_microsecs |
 update_count | update_latency_microsecs | delete_count | delete_latency_microsecs
--------------+--------------------------+--------------+--------------------------
+--------------+--------------------------+--------------+--------------------------
       178957 |                 66684115 |       171065 |                 28876649 |
    519538 |            1454579206167 |            1 |                    53027


-- Showing the same results with expanded display on
=> SELECT *
```

```
     FROM aurora_stat_dml_activity(:oid);
-[ RECORD 1 ]------------+-------------
select_count             | 178957
select_latency_microsecs | 66684115
insert_count             | 171065
insert_latency_microsecs | 28876649
update_count             | 519538
update_latency_microsecs | 1454579206167
delete_count             | 1
delete_latency_microsecs | 53027
```

The following example shows DML activity statistics for all databases in the Aurora PostgreSQL cluster. This cluster has two databases, `postgres` and `mydb`. The comma-separated list corresponds with the `select_count`, `select_latency_microsecs`, `insert_count`, `insert_latency_microsecs`, `update_count`, `update_latency_microsecs`, `delete_count`, and `delete_latency_microsecs` fields.

Aurora PostgreSQL creates and uses a system database named `rdsadmin` to support administrative operations such as backups, restores, health checks, replication, and so on. These DML operations have no impact on your Aurora PostgreSQL cluster.

```
=> SELECT oid,
    datname,
    aurora_stat_dml_activity(oid)
    FROM pg_database;
oid  |    datname     |                   aurora_stat_dml_activity
-------+---------------
+-------------------------------------------------------------------
 14006 | template0      | (,,,,,,,)
 16384 | rdsadmin       | (2346623,1211703821,4297518,817184554,0,0,0,0)
     1 | template1      | (,,,,,,,)
 14007 | postgres       |
 (178961,66716329,171065,28876649,519538,1454579206167,1,53027)
 16401 | mydb           | (200246,64302436,200036,107101855,600000,83659417514,0,0)
```

The following example shows DML activity statistics for all databases, organized in columns for better readability.

```
SELECT db.datname,
       BTRIM(SPLIT_PART(db.asdmla::TEXT, ',', 1), '()') AS select_count,
       BTRIM(SPLIT_PART(db.asdmla::TEXT, ',', 2), '()') AS select_latency_microsecs,
```

```
       BTRIM(SPLIT_PART(db.asdmla::TEXT, ',', 3), '()') AS insert_count,
       BTRIM(SPLIT_PART(db.asdmla::TEXT, ',', 4), '()') AS insert_latency_microsecs,
       BTRIM(SPLIT_PART(db.asdmla::TEXT, ',', 5), '()') AS update_count,
       BTRIM(SPLIT_PART(db.asdmla::TEXT, ',', 6), '()') AS update_latency_microsecs,
       BTRIM(SPLIT_PART(db.asdmla::TEXT, ',', 7), '()') AS delete_count,
       BTRIM(SPLIT_PART(db.asdmla::TEXT, ',', 8), '()') AS delete_latency_microsecs
FROM  (SELECT datname,
              aurora_stat_dml_activity(oid) AS asdmla
         FROM pg_database
      ) AS db;

    datname     | select_count | select_latency_microsecs | insert_count |
 insert_latency_microsecs | update_count | update_latency_microsecs | delete_count |
 delete_latency_microsecs
----------------+--------------+--------------------------+--------------
+--------------------------+--------------+--------------------------+--------------
+--------------------------
 template0      |              |                          |              |
             |              |                          |              |
 rdsadmin       | 4206523      | 2478812333               | 7009414      | 1338482258
             | 0            | 0                        | 0            | 0
 template1      |              |                          |              |
             |              |                          |              |
 fault_test     | 66           | 452099                   | 0            | 0
             | 0            | 0                        | 0            | 0
 db_access_test | 1            | 5982                     | 0            | 0
             | 0            | 0                        | 0            | 0
 postgres       | 42035        | 95179203                 | 5752         | 2678832898
             | 21157        | 441883182488             | 2            | 1520
 mydb           | 71           | 453514                   | 0            | 0
             | 1            | 190                      | 1            | 152
```

The following example shows the average cumulative latency (cumulative latency divided by count) for each DML operation for the database with the OID 16401.

```
=> SELECT select_count,
          select_latency_microsecs,
          select_latency_microsecs/NULLIF(select_count,0) select_latency_per_exec,
          insert_count,
          insert_latency_microsecs,
          insert_latency_microsecs/NULLIF(insert_count,0) insert_latency_per_exec,
          update_count,
          update_latency_microsecs,
```

```
          update_latency_microsecs/NULLIF(update_count,0) update_latency_per_exec,
          delete_count,
          delete_latency_microsecs,
          delete_latency_microsecs/NULLIF(delete_count,0) delete_latency_per_exec
     FROM aurora_stat_dml_activity(16401);
-[ RECORD 1 ]------------+-------------
select_count             | 451312
select_latency_microsecs | 80205857
select_latency_per_exec  | 177
insert_count             | 451001
insert_latency_microsecs | 123667646
insert_latency_per_exec  | 274
update_count             | 1353067
update_latency_microsecs | 200900695615
update_latency_per_exec  | 148478
delete_count             | 12
delete_latency_microsecs | 448
delete_latency_per_exec  | 37
```

aurora_stat_get_db_commit_latency

Gets the cumulative commit latency in microseconds for Aurora PostgreSQL databases. *Commit latency* is measured as the time between when a client submits a commit request and when it receives the commit acknowledgement.

Syntax

```
aurora_stat_get_db_commit_latency(database_oid)
```

Arguments

database_oid

The object ID (OID) of the Aurora PostgreSQL database.

Return type

SETOF record

Usage notes

Amazon CloudWatch uses this function to calculate the average commit latency. For more information about Amazon CloudWatch metrics and how to troubleshoot high commit latency, see Viewing metrics in the Amazon RDS console and Making better decisions about Amazon RDS with Amazon CloudWatch metrics.

You can reset this statistic by using the PostgreSQL statistics access function `pg_stat_reset`. You can check the last time this statistic was reset by using the `pg_stat_get_db_stat_reset_time` function. For more information about PostgreSQL statistics access functions, see The Statistics Collector in the PostgreSQL documentation.

Examples

The following example gets the cumulative commit latency for each database in the `pg_database` cluster.

```
=> SELECT oid,
    datname,
    aurora_stat_get_db_commit_latency(oid)
    FROM pg_database;

  oid  |    datname     | aurora_stat_get_db_commit_latency
-------+----------------+-----------------------------------
 14006 | template0      |                                 0
 16384 | rdsadmin       |                         654387789
     1 | template1      |                                 0
 16401 | mydb           |                            229556
 69768 | postgres       |                             22011
```

The following example gets the cumulative commit latency for the currently connected database. Before calling the `aurora_stat_get_db_commit_latency` function, the example first uses `\gset` to define a variable for the `oid` argument and sets its value from the connected database.

```
--Get the oid value from the connected database before calling
 aurora_stat_get_db_commit_latency
=> SELECT oid
     FROM pg_database
    WHERE datname=(SELECT current_database()) \gset
=> SELECT *
     FROM aurora_stat_get_db_commit_latency(:oid);
```

```
 aurora_stat_get_db_commit_latency
-----------------------------------
                          1424279160
```

The following example gets the cumulative commit latency for the mydb database in the pg_database cluster. Then, it resets this statistic by using the pg_stat_reset function and shows the results. Finally, it uses the pg_stat_get_db_stat_reset_time function to check the last time this statistic was reset.

```
=> SELECT oid,
    datname,
    aurora_stat_get_db_commit_latency(oid)
    FROM pg_database
    WHERE datname = 'mydb';

  oid  |  datname  | aurora_stat_get_db_commit_latency
-------+-----------+-----------------------------------
 16427 | mydb      |                           3320370


=> SELECT pg_stat_reset();
 pg_stat_reset
---------------


=> SELECT oid,
          datname,
          aurora_stat_get_db_commit_latency(oid)
     FROM pg_database
    WHERE datname = 'mydb';
  oid  |  datname  | aurora_stat_get_db_commit_latency
-------+-----------+-----------------------------------
 16427 | mydb      |                                 6


=> SELECT *
     FROM pg_stat_get_db_stat_reset_time(16427);

 pg_stat_get_db_stat_reset_time
--------------------------------
 2021-04-29 21:36:15.707399+00
```

aurora_stat_logical_wal_cache

Shows logical write-ahead log (WAL) cache usage per slot.

Syntax

```
SELECT * FROM aurora_stat_logical_wal_cache()
```

Arguments

None

Return type

SETOF record with the following columns:

- `name` – The name of the replication slot.
- `active_pid` – ID of the walsender process.
- `cache_hit` – The total number of wal cache hits since last reset.
- `cache_miss` – The total number of wal cache misses since last reset.
- `blks_read` – The total number of wal cache read requests.
- `hit_rate` – The WAL cache hit rate (cache_hit / blks_read).
- `last_reset_timestamp` – Last time that the counter was reset.

Usage notes

This function is available for the following Aurora PostgreSQL versions.

- 15.2 and all higher versions
- 14.7 and higher versions
- 13.8 and higher versions
- 12.12 and higher versions
- 11.17 and higher versions

Examples

The following example shows two replication slots with only one active. `aurora_stat_logical_wal_cache` function.

```
=> SELECT *
     FROM aurora_stat_logical_wal_cache();
    name    | active_pid | cache_hit | cache_miss | blks_read | hit_rate |
 last_reset_timestamp
------------+------------+-----------+------------+-----------+----------
+-------------------------------
 test_slot1 |      79183 |        24 |          0 |        24 | 100.00%  | 2022-08-05
 17:39:56.830635+00
 test_slot2 |            |         1 |          0 |         1 | 100.00%  | 2022-08-05
 17:34:04.036795+00
(2 rows)
```

aurora_stat_memctx_usage

Reports the memory context usage for each PostgreSQL process.

Syntax

```
aurora_stat_memctx_usage()
```

Arguments

None

Return type

SETOF record with the following columns:

- `pid` – The ID of the process.
- `name` – The name of the memory context.
- `allocated` – The number of bytes obtained from the underlying memory subsystem by the memory context.
- `used` – The number of bytes committed to clients of the memory context.
- `instances` – The count of currently existing contexts of this type.

Usage notes

This function displays the memory context usage for each PostgreSQL process. Some processes are labeled anonymous. The processes aren't exposed because they contain restricted keywords.

This function is available starting with the following Aurora PostgreSQL versions:

- 15.3 and higher 15 versions
- 14.8 and higher 14 versions
- 13.11 and higher 13 versions
- 12.15 and higher 12 versions
- 11.20 and higher 11 versions

Examples

The following example shows the results of calling the `aurora_stat_memctx_usage` function.

```
=> SELECT *
     FROM aurora_stat_memctx_usage();

    pid| name                             | allocated |   used   | instances
-------+----------------------------------+-----------+----------+-----------
123864 | Miscellaneous                    |     19520 |   15064 |         3
123864 | Aurora File Context              |      8192 |     616 |         1
123864 | Aurora WAL Context               |      8192 |     296 |         1
123864 | CacheMemoryContext               |    524288 |  422600 |         1
123864 | Catalog tuple context            |     16384 |   13736 |         1
123864 | ExecutorState                    |     32832 |   28304 |         1
123864 | ExprContext                      |      8192 |    1720 |         1
123864 | GWAL record construction         |      1024 |     832 |         1
123864 | MdSmgr                           |      8192 |     296 |         1
123864 | MessageContext                   |    532480 |  353832 |         1
123864 | PortalHeapMemory                 |      1024 |     488 |         1
123864 | PortalMemory                     |      8192 |     576 |         1
123864 | printtup                         |      8192 |     296 |         1
123864 | RelCache hash table entries      |      8192 |    8152 |         1
123864 | RowDescriptionContext            |      8192 |    1344 |         1
123864 | smgr relation context            |      8192 |     296 |         1
123864 | Table function arguments         |      8192 |     352 |         1
123864 | TopTransactionContext            |      8192 |     632 |         1
123864 | TransactionAbortContext          |     32768 |     296 |         1
```

```
123864 | WAL record construction         |     50216 |   43904 |         1
123864 | hash table                      |     65536 |   52744 |         6
123864 | Relation metadata               |    191488 |  124240 |        87
104992 | Miscellaneous                   |      9280 |    7728 |         3
104992 | Aurora File Context             |      8192 |     376 |         1
104992 | Aurora WAL Context              |      8192 |     296 |         1
104992 ||Autovacuum Launcher             |      8192 |     296 |         1
104992 | Autovacuum database list        |     16384 |     744 |         2
104992 | CacheMemoryContext              |    262144 |  140288 |         1
104992 | Catalog tuple context           |      8192 |     296 |         1
104992 | GWAL record construction        |      1024 |     832 |         1
104992 | MdSmgr                          |      8192 |     296 |         1
104992 | PortalMemory                    |      8192 |     296 |         1
104992 | RelCache hash table entries     |      8192 |     296 |         1
104992 | smgr relation context           |      8192 |     296 |         1
104992 | Autovacuum start worker (tmp)   |      8192 |     296 |         1
104992 | TopTransactionContext           |     16384 |     592 |         2
104992 | TransactionAbortContext         |     32768 |     296 |         1
104992 | WAL record construction         |     50216 |   43904 |         1
104992 | hash table                      |     49152 |   34024 |         4
(39 rows)
```

Some restricted keywords will be hidden and the output will look as follows:

```
postgres=>SELECT *
     FROM aurora_stat_memctx_usage();

    pid| name                            | allocated |   used  | instances
-------+---------------------------------+-----------+---------+-----------
  5482 | anonymous                       |      8192 |     456 |         1
  5482 | anonymous                       |      8192 |     296 |         1
```

aurora_stat_optimized_reads_cache

This function shows tiered cache stats.

Syntax

```
aurora_stat_optimized_reads_cache()
```

Arguments

None

Return type

SETOF record with the following columns:

- `total_size` – Total optimized reads cache size.
- `used_size` – Used page size in optimized reads cache.

Usage notes

This function is available in the following Aurora PostgreSQL versions:

- 15.4 and higher 15 versions
- 14.9 and higher 14 versions

Examples

The following example shows the output on a r6gd.8xlarge instance :

```
=> select pg_size_pretty(total_size) as total_size, pg_size_pretty(used_size)
                as used_size from aurora_stat_optimized_reads_cache();
total_size | used_size
-----------+-----------
1054 GB    | 975 GB
```

aurora_stat_plans

Returns a row for every tracked execution plan.

Syntax

```
aurora_stat_plans(
    showtext
)
```

Arguments

- showtext – Show the query and plan text. Valid values are NULL, true or false. True will show the query and plan text.

Return type

Returns a row for each tracked plan that contains all the columns from `aurora_stat_statements` and the following additional columns.

- planid – plan identifier
- explain_plan – explain plan text
- plan_type:
  - `no plan` - no plan was captured
  - `estimate` - plan captured with estimated costs
  - `actual` - plan captured with EXPLAIN ANALYZE
- plan_captured_time – last time a plan was captured

Usage notes

`aurora_compute_plan_id` must be enabled and `pg_stat_statements` must be in `shared_preload_libraries` for the plans to be tracked.

The number of plans available is controlled by the value set in the `pg_stat_statements.max` parameter. When `aurora_compute_plan_id` is enabled, you can track the plans up to this specified value in `aurora_stat_plans`.

This function is available from Aurora PostgreSQL versions 14.10, 15.5, and for all other later versions.

Examples

In the example below, the two plans that are for the query identifier -5471422286312252535 are captured and the statements statistics are tracked by the planid.

```
db1=# select calls, total_exec_time, planid, plan_captured_time, explain_plan
db1-# from aurora_stat_plans(true)
```

```
db1-# where queryid = '-5471422286312252535'

calls    |  total_exec_time   |   planid    |      plan_captured_time       |
                explain_plan
---------+--------------------+-------------+-------------------------------
+-------------------------------------------------------------------
 1532632 |  3209846.097107853 |  1602979607 | 2023-10-31 03:27:16.925497+00 | Update on
 pgbench_branches                                        +
         |                    |             |                               |   ->
 Bitmap Heap Scan on pgbench_branches                       +
         |                    |             |                               |
 Recheck Cond: (bid = 76)                                 +
         |                    |             |                               |         -
>  Bitmap Index Scan on pgbench_branches_pkey          +
         |                    |             |                               |
     Index Cond: (bid = 76)
   61365 | 124078.18012200127 | -2054628807 | 2023-10-31 03:20:09.85429+00  | Update on
 pgbench_branches                                        +
         |                    |             |                               |   ->
 Index Scan using pgbench_branches_pkey on pgbench_branches+
         |                    |             |                               |
 Index Cond: (bid = 17)
```

aurora_stat_reset_wal_cache

Resets the counter for logical wal cache.

Syntax

To reset a specific slot

```
SELECT * FROM aurora_stat_reset_wal_cache('slot_name')
```

To reset all slots

```
SELECT * FROM aurora_stat_reset_wal_cache(NULL)
```

Arguments

NULL or `slot_name`

Return type

Status message, text string

- Reset the logical wal cache counter – Success message. This text is returned when the function succeeds.
- Replication slot not found. Please try again. – Failure message. This text is returned when the function doesn't succeed.

Usage notes

This function is available for the following versions.

- Aurora PostgreSQL 14.5 and higher
- Aurora PostgreSQL version 13.8 and higher
- Aurora PostgreSQL version 12.12 and higher
- Aurora PostgreSQLversion 11.17 and higher

Examples

The following example uses the `aurora_stat_reset_wal_cache` function to reset a slot named `test_results`, and then tries to reset a slot that doesn't exist.

```
=> SELECT *
     FROM aurora_stat_reset_wal_cache('test_slot');
aurora_stat_reset_wal_cache
------------------------------------
 Reset the logical wal cache counter.
(1 row)
=> SELECT *
     FROM aurora_stat_reset_wal_cache('slot-not-exist');
aurora_stat_reset_wal_cache
-----------------------------------------------
 Replication slot not found. Please try again.
(1 row)
```

aurora_stat_resource_usage

Reports the real-time resource utilization which consists of backend resource metrics and cpu usage for all Aurora PostgreSQL backend processes.

Syntax

```
aurora_stat_resource_usage()
```

Arguments

None

Return type

SETOF record with columns:

- pid - Process identifier
- allocated_memory - Total memory allocated by process in bytes
- used_memory - Actually used memory by process in bytes
- cpu_usage_percent - CPU usage percentage of the process (all threads)
- worker_threads_cpu_usage_percent - CPU usage percentage of the worker threads (all threads except the main thread) of the process. For backend processes that don't use worker threads, this value is 0.

Usage notes

This function displays the backend resource usage for each Aurora PostgreSQL backend process.

This function is available starting with the following Aurora PostgreSQL versions:

- Aurora PostgreSQL 17.5 and higher 17 versions
- Aurora PostgreSQL 16.9 and higher 16 versions
- Aurora PostgreSQL 15.13 and higher 15 versions
- Aurora PostgreSQL 14.18 and higher 14 versions
- Aurora PostgreSQL 13.21 and higher 13 versions

The `worker_threads_cpu_usage_percent` column is available starting with the following Aurora PostgreSQL versions:

- Aurora PostgreSQL 18.6 and higher 18 versions
- Aurora PostgreSQL 17.11 and higher 17 versions
- Aurora PostgreSQL 16.15 and higher 16 versions
- Aurora PostgreSQL 15.19 and higher 15 versions
- Aurora PostgreSQL 14.24 and higher 14 versions

In earlier versions, the function returns only the first four columns.

Examples

The following example shows the output of the `aurora_stat_resource_usage` function.

```
=> select * from aurora_stat_resource_usage();
 pid  | allocated_memory | used_memory |   cpu_usage_percent   |
 worker_threads_cpu_usage_percent
------+------------------+-------------+-----------------------
+---------------------------------
  666 |          1074032 |      333544 |   0.00729274882897963 |
        0
  668 |          3076776 |     1563488 |  0.006013116835953961 |
        0
 2401 |          1232992 |      943144 |                     0 |
        0
  664 |          1161616 |      797584 |     81.19999999999999 |
      67.8
  671 |          1087888 |      789352 |                  62.4 |
      52.4
(5 rows)
```

The last two rows show backend processes whose worker threads consume CPU. For backend processes that don't use worker threads, the value is 0.

aurora_stat_statements

Displays all `pg_stat_statements` columns and adds more columns in the end.

Syntax

```
aurora_stat_statements(showtext boolean)
```

Arguments

showtext boolean

Return type

SETOF record with all `pg_stat_statements` columns and the following additional columns. For more information on `pg_stat_statements` columns, see `pg_stat_statements`.

You can reset stats for this function using `pg_stat_statements_reset()`.

- `storage_blks_read` – Total number of shared blocks read from aurora storage by this statement.
- `orcache_blks_hit` – Total number of optimized reads cache hits by this statement.
- `storage_blk_read_time` – If `track_io_timing` is enabled, it tracks the total time the statement spent reading shared blocks from aurora storage, in milliseconds, otherwise the value is zero. For more information, see track_io_timing.
- `local_blk_read_time` – If `track_io_timing` is enabled, it tracks the total time the statement spent reading local blocks, in milliseconds, otherwise the value is zero. For more information, see track_io_timing.
- `orcache_blk_read_time` – If `track_io_timing` is enabled, it tracks the total time the statement spent reading shared blocks from optimized reads cache, in milliseconds, otherwise the value is zero. For more information, see track_io_timing.
- `total_plan_peakmem` – Total sum of peak memory values during planning phase for all calls to this statement. To see the average peak memory during planning for the statement, divide this value by the number of calls.
- `min_plan_peakmem` – Smallest peak memory value seen during planning across all calls to this statement.
- `max_plan_peakmem` – Largest peak memory value during planning seen across all calls to this statement.
- `total_exec_peakmem` – Total sum of peak memory values during execution phase for all calls to this statement. To see the average peak memory during execution for the statement, divide this value by the number of calls.

- `min_exec_peakmem` –Smallest peak memory value, in bytes, seen during execution across all calls to this statement.
- `max_exec_peakmem` – Largest peak memory value, in bytes, seen during execution across all calls to this statement.

> **Note**
>
> `total_plan_peakmem`, `min_plan_peakmem`, and `max_plan_peakmem` are only monitored when the setting `pg_stat_statements.track_planning` is turned on.

Usage notes

To use the aurora_stat_statements() function, you must include `pg_stat_statements` extension in the `shared_preload_libraries` parameter.

This function is available in the following Aurora PostgreSQL versions:

- 15.4 and higher 15 versions
- 14.9 and higher 14 versions

The columns showing peak memory are available from the following versions:

- 16.3 and higher versions
- 15.7 and higher versions
- 14.12 and higher versions

Examples

The following example shows how it carries all the pg_stat_statements columns and append 11 new columns in the end:

```
=> select * from aurora_stat_statements(true) where query like 'with window_max%';
-[ RECORD 1 ]----------
+-----------------------------------------------------------------------------------------------
userid                | 16409
dbid                  | 5
toplevel              | t
```

```
queryid                | -8347523682669847482
query                  | with window_max as (select custid, max(scratch) over (order by
 scratch rows between $1 preceding
and $2 following) wmax from ts) select sum(wmax), max(custid) from window_max
plans                  | 0
total_plan_time        | 0
min_plan_time          | 0
max_plan_time          | 0
mean_plan_time         | 0
stddev_plan_time       | 0
calls                  | 4
total_exec_time        | 254.105121
min_exec_time          | 57.503164000000005
max_exec_time          | 68.687418
mean_exec_time         | 63.52628025
stddev_exec_time       | 5.150765359979643
rows                   | 4
shared_blks_hit        | 200192
shared_blks_read       | 0
shared_blks_dirtied    | 0
shared_blks_written    | 0
local_blks_hit         | 0
local_blks_read        | 0
local_blks_dirtied     | 0
local_blks_written     | 0
temp_blks_read         | 0
temp_blks_written      | 0
blk_read_time          | 0
blk_write_time         | 0
temp_blk_read_time     | 0
temp_blk_write_time    | 0
wal_records            | 0
wal_fpi                | 0
wal_bytes              | 0
jit_functions          | 0
jit_generation_time    | 0
jit_inlining_count     | 0
jit_inlining_time      | 0
jit_optimization_count | 0
jit_optimization_time  | 0
jit_emission_count     | 0
jit_emission_time      | 0
storage_blks_read      | 0
orcache_blks_hit       | 0
```

```
storage_blk_read_time  | 0
local_blk_read_time    | 0
orcache_blk_read_time  | 0
total_plan_peakmem     | 0
min_plan_peakmem       | 0
max_plan_peakmem       | 0
total_exec_peakmem     | 6356224
min_exec_peakmem       | 1589056
max_exec_peakmem       | 1589056
```

aurora_stat_system_waits

Reports wait event information for the Aurora PostgreSQL DB instance.

Syntax

```
aurora_stat_system_waits()
```

Arguments

None

Return type

SETOF record

Usage notes

This function returns the cumulative number of waits and cumulative wait time for each wait event generated by the DB instance that you're currently connected to.

The returned recordset includes the following fields:

- `type_id` – The ID of the type of wait event.
- `event_id` – The ID of the wait event.
- `waits` – The number of times the wait event occurred.
- `wait_time` – The total amount of time in microseconds spent waiting for this event.

Statistics returned by this function are reset when a DB instance restarts.

Examples

The following example shows results from calling the `aurora_stat_system_waits` function.

```
=> SELECT *
    FROM aurora_stat_system_waits();
 type_id | event_id  |   waits   |  wait_time
---------+-----------+-----------+--------------
       1 |  16777219 |        11 |        12864
       1 |  16777220 |       501 |       174473
       1 |  16777270 |     53171 |     23641847
       1 |  16777271 |        23 |       319668
       1 |  16777274 |        60 |        12759
.
.
.
      10 | 167772231 |    204596 |    790945212
      10 | 167772232 |         2 |        47729
      10 | 167772234 |         1 |          888
      10 | 167772235 |         2 |           64
```

The following example shows how you can use this function together with `aurora_stat_wait_event` and `aurora_stat_wait_type` to produce more readable results.

```
=> SELECT type_name,
             event_name,
             waits,
             wait_time
        FROM aurora_stat_system_waits()
NATURAL JOIN aurora_stat_wait_event()
NATURAL JOIN aurora_stat_wait_type();

 type_name |       event_name       |  waits   |  wait_time
-----------+------------------------+----------+--------------
 LWLock    | XidGenLock             |       11 |        12864
 LWLock    | ProcArrayLock          |      501 |       174473
 LWLock    | buffer_content         |    53171 |     23641847
 LWLock    | rdsutils               |        2 |        12764
 Lock      | tuple                  |    75686 |   2033956052
 Lock      | transactionid          |  1765147 |  47267583409
 Activity  | AutoVacuumMain         |   136868 |  56305604538
 Activity  | BgWriterHibernate      |     7486 |  55266949471
 Activity  | BgWriterMain           |     7487 |   1508909964
```

```
.
.
.
 IO        | SLRURead               |        3 |        11756
 IO        | WALWrite               | 52544463 |    388850428
 IO        | XactSync               |   187073 |    597041642
 IO        | ClogRead               |        2 |        47729
 IO        | OutboundCtrlRead       |        1 |          888
 IO        | OutboundCtrlWrite      |        2 |           64
```

aurora_stat_wait_event

Lists all supported wait events for Aurora PostgreSQL. For information about Aurora PostgreSQL wait events, see Amazon Aurora PostgreSQL wait events.

Syntax

```
aurora_stat_wait_event()
```

Arguments

None

Return type

SETOF record with the following columns:

- type_id – The ID of the type of wait event.
- event_id – The ID of the wait event.
- type_name – Wait type name
- event_name – Wait event name

Usage notes

To see event names with event types instead of IDs, use this function together with other functions such as `aurora_stat_wait_type` and `aurora_stat_system_waits`. Wait event names returned by this function are the same as those returned by the `aurora_wait_report` function.

Examples

The following example shows results from calling the `aurora_stat_wait_event` function.

```
=>  SELECT *
    FROM aurora_stat_wait_event();

 type_id | event_id  |               event_name
---------+-----------+-----------------------------------------
       1 |  16777216 | <unassigned:0>
       1 |  16777217 | ShmemIndexLock
       1 |  16777218 | OidGenLock
       1 |  16777219 | XidGenLock
.
.
.
       9 | 150994945 | PgSleep
       9 | 150994946 | RecoveryApplyDelay
      10 | 167772160 | BufFileRead
      10 | 167772161 | BufFileWrite
      10 | 167772162 | ControlFileRead
.
.
.
      10 | 167772226 | WALInitWrite
      10 | 167772227 | WALRead
      10 | 167772228 | WALSync
      10 | 167772229 | WALSyncMethodAssign
      10 | 167772230 | WALWrite
      10 | 167772231 | XactSync
.
.
.
      11 | 184549377 | LsnAllocate
```

The following example joins `aurora_stat_wait_type` and `aurora_stat_wait_event` to return type names and event names for improved readability.

```
=> SELECT *
    FROM aurora_stat_wait_type() t
    JOIN aurora_stat_wait_event() e
      ON t.type_id = e.type_id;

 type_id | type_name | type_id | event_id  |               event_name
---------+-----------+---------+-----------+-----------------------------------------
       1 | LWLock    |       1 |  16777216 | <unassigned:0>
       1 | LWLock    |       1 |  16777217 | ShmemIndexLock
```

```
       1 | LWLock     |       1 |  16777218 | OidGenLock
       1 | LWLock     |       1 |  16777219 | XidGenLock
       1 | LWLock     |       1 |  16777220 | ProcArrayLock
.
.
.
       3 | Lock       |       3 |  50331648 | relation
       3 | Lock       |       3 |  50331649 | extend
       3 | Lock       |       3 |  50331650 | page
       3 | Lock       |       3 |  50331651 | tuple
.
.
.
      10 | IO         |      10 | 167772214 | TimelineHistorySync
      10 | IO         |      10 | 167772215 | TimelineHistoryWrite
      10 | IO         |      10 | 167772216 | TwophaseFileRead
      10 | IO         |      10 | 167772217 | TwophaseFileSync
.
.
.
      11 | LSN        |      11 | 184549376 | LsnDurable
```

aurora_stat_wait_type

Lists all supported wait types for Aurora PostgreSQL.

Syntax

```
aurora_stat_wait_type()
```

Arguments

None

Return type

SETOF record with the following columns:

- type_id – The ID of the type of wait event.
- type_name – Wait type name.

Usage notes

To see wait event names with wait event types instead of IDs, use this function together with other functions such as `aurora_stat_wait_event` and `aurora_stat_system_waits`. Wait type names returned by this function are the same as those returned by the `aurora_wait_report` function.

Examples

The following example shows results from calling the `aurora_stat_wait_type` function.

```
=> SELECT *
     FROM aurora_stat_wait_type();
 type_id | type_name
---------+-----------
       1 | LWLock
       3 | Lock
       4 | BufferPin
       5 | Activity
       6 | Client
       7 | Extension
       8 | IPC
       9 | Timeout
      10 | IO
      11 | LSN
```

aurora_version

Returns the string value of the Amazon Aurora PostgreSQL-Compatible Edition version number.

Syntax

```
aurora_version()
```

Arguments

None

Return type

CHAR or VARCHAR string

Usage notes

This function displays the version of the Amazon Aurora PostgreSQL-Compatible Edition database engine. The version number is returned as a string formatted as *major*.*minor*.*patch*. For more information about Aurora PostgreSQL version numbers, see Aurora version number.

You can choose when to apply minor version upgrades by setting the maintenance window for your Aurora PostgreSQL DB cluster. To learn how, see Maintaining an Amazon Aurora DB cluster.

Starting with the release of Aurora PostgreSQL versions 13.3, 12.8, 11.13, 10.18, and for all other later versions, Aurora version numbers follow PostgreSQL version numbers. For more information about all Aurora PostgreSQL releases, see Amazon Aurora PostgreSQL updates in the *Release Notes for Aurora PostgreSQL*.

Examples

The following example shows the results of calling the `aurora_version` function on an Aurora PostgreSQL DB cluster running PostgreSQL 12.7, Aurora PostgreSQL release 4.2 and then running the same function on a cluster running Aurora PostgreSQL version 13.3.

```
=> SELECT * FROM aurora_version();
aurora_version
----------------
 4.2.2
SELECT * FROM aurora_version();
aurora_version
----------------
 13.3.0
```

This example shows how to use the function with various options to get more detail about the Aurora PostgreSQL version. This example has an Aurora version number that's distinct from the PostgreSQL version number.

```
=> SHOW SERVER_VERSION;
 server_version
----------------
 12.7
(1 row)

=> SELECT * FROM aurora_version();
```

```
aurora_version
----------------
 4.2.2
(1 row)

=> SELECT current_setting('server_version') AS "PostgreSQL Compatiblility";
PostgreSQL Compatiblility
--------------------------
 12.7
(1 row)

=> SELECT version() AS "PostgreSQL Compatiblility Full String";
PostgreSQL Compatiblility Full String
------------------------------------------------------------------------------------------------
 PostgreSQL 12.7 on aarch64-unknown-linux-gnu, compiled by aarch64-unknown-linux-gnu-
gcc (GCC) 7.4.0, 64-bit
(1 row)

=> SELECT 'Aurora: '
    || aurora_version()
    || ' Compatible with PostgreSQL: '
    || current_setting('server_version') AS "Instance Version";
Instance Version
-----------------------------------------------
 Aurora: 4.2.2 Compatible with PostgreSQL: 12.7
(1 row)
```

This next example uses the function with the same options in the previous example. This example doesn't have an Aurora version number that's distinct from the PostgreSQL version number.

```
=> SHOW SERVER_VERSION;
server_version
----------------
 13.3

=> SELECT * FROM aurora_version();
aurora_version
----------------
 13.3.0
=> SELECT current_setting('server_version') AS "PostgreSQL Compatiblility";
PostgreSQL Compatiblility
--------------------------
```

```
 13.3

=> SELECT version() AS "PostgreSQL Compatiblility Full String";
PostgreSQL Compatiblility Full String
------------------------------------------------------------------------------------------------
 PostgreSQL 13.3 on x86_64-pc-linux-gnu, compiled by x86_64-pc-linux-gnu-gcc (GCC)
 7.4.0, 64-bit
=> SELECT 'Aurora: '
    || aurora_version()
    || ' Compatible with PostgreSQL: '
    || current_setting('server_version') AS "Instance Version";
Instance Version
-------------------------------------------------------
 Aurora: 13.3.0 Compatible with PostgreSQL: 13.3
```

aurora_volume_logical_start_lsn

Returns the log sequence number (LSN) used for identifying the beginning of a record in the logical write-ahead log (WAL) stream of the Aurora cluster volume.

Syntax

```
aurora_volume_logical_start_lsn()
```

Arguments

None

Return type

`pg_lsn`

Usage notes

This function identifies the beginning of the record in the logical WAL stream for a given Aurora cluster volume. You can use this function while performing major version upgrade using logical replication and Aurora fast cloning to determine the LSN at which a snapshot or database clone is taken. You can then use logical replication to continuously stream the newer data recorded after the LSN and synchronize the changes from publisher to subscriber.

For more information on using logical replication for a major version upgrade, see Using logical replication to perform a major version upgrade for Aurora PostgreSQL.

This function is available on the following versions of Aurora PostgreSQL:

- 15.2 and higher 15 versions
- 14.3 and higher 14 versions
- 13.6 and higher 13 versions
- 12.10 and higher 12 versions
- 11.15 and higher 11 versions
- 10.20 and higher 10 versions

Examples

You can obtain the log sequence number (LSN) using the following query:

```
postgres=> SELECT aurora_volume_logical_start_lsn();

aurora_volume_logical_start_lsn
---------------
0/402E2F0
(1 row)
```

aurora_wait_report

This function shows wait event activity over a period of time.

Syntax

```
aurora_wait_report([time])
```

Arguments

time (optional)

The time in seconds. Default is 10 seconds.

Return type

SETOF record with the following columns:

- type_name – Wait type name

- event_name – Wait event name
- wait – Number of waits
- wait_time – Wait time in milliseconds
- ms_per_wait – Average milliseconds by the number of an wait
- waits_per_xact – Average waits by the number of one transaction
- ms_per_xact – Average milliseconds by the number of transactions

Usage notes

This function is available as of Aurora PostgreSQL release 1.1 compatible with PostgreSQL 9.6.6 and higher versions.

To use this function, you need to first create the Aurora PostgreSQL `aurora_stat_utils` extension, as follows:

```
=> CREATE extension aurora_stat_utils;
CREATE EXTENSION
```

For more information about available Aurora PostgreSQL extension versions, see Extension versions for Amazon Aurora PostgreSQL in *Release Notes for Aurora PostgreSQL*.

This function calculates the instance-level wait events by comparing two snapshots of statistics data from aurora_stat_system_waits() function and pg_stat_database PostgreSQL Statistics Views.

For more information about `aurora_stat_system_waits()` and `pg_stat_database`, see The Statistics Collector in the *PostgreSQL documentation*.

When run, this function takes an initial snapshot, waits the number of seconds specified, and then takes a second snapshot. The function compares the two snapshots and returns the difference. This difference represents the instance's activity for that time interval.

On the writer instance, the function also displays the number of committed transactions and TPS (transactions per second). This function returns information at the instance level and includes all databases on the instance.

Examples

This example shows how to create aurora_stat_utils extension to be able to use aurora_wait_report function.

```
=> CREATE extension aurora_stat_utils;
CREATE EXTENSION
```

This example shows how to check wait report for 10 seconds.

```
=> SELECT *
     FROM aurora_wait_report();
NOTICE:  committed 34 transactions in 10 seconds (tps 3)
 type_name |    event_name     | waits | wait_time | ms_per_wait | waits_per_xact |
 ms_per_xact
-----------+-------------------+-------+-----------+-------------+----------------
+-------------
 Client    | ClientRead        |    26 |  30003.00 |    1153.961 |           0.76 |
 882.441
 Activity  | WalWriterMain     |    50 |  10051.32 |     201.026 |           1.47 |
 295.627
 Timeout   | PgSleep           |     1 |  10049.52 |   10049.516 |           0.03 |
 295.574
 Activity  | BgWriterHibernate |     1 |  10048.15 |   10048.153 |           0.03 |
 295.534
 Activity  | AutoVacuumMain    |    18 |   9941.66 |     552.314 |           0.53 |
 292.402
 Activity  | BgWriterMain      |     1 |    201.09 |     201.085 |           0.03 |
   5.914
 IO        | XactSync          |    15 |     25.34 |       1.690 |           0.44 |
   0.745
 IO        | RelationMapRead   |    12 |      0.54 |       0.045 |           0.35 |
   0.016
 IO        | WALWrite          |    84 |      0.21 |       0.002 |           2.47 |
   0.006
 IO        | DataFileExtend    |     1 |      0.02 |       0.018 |           0.03 |
   0.001
```

This example shows how to check wait report for 60 seconds.

```
=> SELECT *
     FROM aurora_wait_report(60);
NOTICE:  committed 1544 transactions in 60 seconds (tps 25)
 type_name |       event_name       |  waits  | wait_time | ms_per_wait |
 waits_per_xact | ms_per_xact
-----------+------------------------+---------+-----------+-------------
+----------------+-------------
```

```
Lock      | transactionid          |    6422 | 477000.53 |      74.276 |
4.16 |     308.938
Client    | ClientRead             |    8265 | 270752.99 |      32.759 |
5.35 |     175.358
Activity  | CheckpointerMain       |       1 |  60100.25 |   60100.246 |
0.00 |      38.925
Timeout   | PgSleep                |       1 |  60098.49 |   60098.493 |
0.00 |      38.924
Activity  | WalWriterMain          |     296 |  60010.99 |     202.740 |
0.19 |      38.867
Activity  | AutoVacuumMain         |     107 |  59827.84 |     559.139 |
0.07 |      38.749
Activity  | BgWriterMain           |     290 |  58821.83 |     202.834 |
0.19 |      38.097
IO        | XactSync               |    1295 |  55220.13 |      42.641 |
0.84 |      35.764
IO        | WALWrite               | 6602259 |  47810.94 |       0.007 |
4276.07 |      30.966
Lock      | tuple                  |     473 |  29880.67 |      63.173 |
0.31 |      19.353
LWLock    | buffer_mapping         |     142 |   3540.13 |      24.930 |
0.09 |       2.293
Activity  | BgWriterHibernate      |     290 |   1124.15 |       3.876 |
0.19 |       0.728
IO        | BufFileRead            |    7615 |    618.45 |       0.081 |
4.93 |       0.401
LWLock    | buffer_content         |      73 |    345.93 |       4.739 |
0.05 |       0.224
LWLock    | lock_manager           |      62 |    191.44 |       3.088 |
0.04 |       0.124
IO        | RelationMapRead        |      72 |      5.16 |       0.072 |
0.05 |       0.003
LWLock    | ProcArrayLock          |       1 |      2.01 |       2.008 |
0.00 |       0.001
IO        | ControlFileWriteUpdate |       2 |      0.03 |       0.013 |
0.00 |       0.000
IO        | DataFileExtend         |       1 |      0.02 |       0.018 |
0.00 |       0.000
IO        | ControlFileSyncUpdate  |       1 |      0.00 |       0.000 |
0.00 |       0.000
```

Amazon Aurora PostgreSQL parameters

You manage your Amazon Aurora DB cluster in the same way that you manage Amazon RDS DB instances, by using parameters in a DB parameter group. However, Amazon Aurora differs from Amazon RDS in that an Aurora DB cluster has multiple DB instances. Some of the parameters that you use to manage your Amazon Aurora DB cluster apply to the entire cluster, while other parameters apply only to a given DB instance in the DB cluster, as follows:

- **DB cluster parameter group** – A DB cluster parameter group contains the set of engine configuration parameters that apply throughout the Aurora DB cluster. For example, cluster cache management is a feature of an Aurora DB cluster that's controlled by the `apg_ccm_enabled` parameter which is part of the DB cluster parameter group. The DB cluster parameter group also contains default settings for the DB parameter group for the DB instances that make up the cluster.
- **DB parameter group** – A DB parameter group is the set of engine configuration values that apply to a specific DB instance of that engine type. The DB parameter groups for the PostgreSQL DB engine are used by an RDS for PostgreSQL DB instance and Aurora PostgreSQL DB cluster. These configuration settings apply to properties that can vary among the DB instances within an Aurora cluster, such as the sizes for memory buffers.

You manage cluster-level parameters in DB cluster parameter groups. You manage instance-level parameters in DB parameter groups. You can manage parameters using the Amazon RDS console, the Amazon CLI, or the Amazon RDS API. There are separate commands for managing cluster-level parameters and instance-level parameters.

- To manage cluster-level parameters in a DB cluster parameter group, use the modify-db-cluster-parameter-group Amazon CLI command.
- To manage instance-level parameters in a DB parameter group for a DB instance in a DB cluster, use the modify-db-parameter-group Amazon CLI command.

To learn more about the Amazon CLI, see Using the Amazon CLI in the *Amazon Command Line Interface User Guide*.

For more information about parameter groups, see Parameter groups for Amazon Aurora.

Viewing Aurora PostgreSQL DB cluster and DB parameters

You can view all available default parameter groups for RDS for PostgreSQL DB instances and for Aurora PostgreSQL DB clusters in the Amazon Web Services Management Console. The default parameter groups for all DB engines and DB cluster types and versions are listed for each Amazon Region. Any custom parameter groups are also listed.

Rather than viewing in the Amazon Web Services Management Console, you can also list parameters contained in DB cluster parameter groups and DB parameter groups by using the Amazon CLI or the Amazon RDS API. For example, to list parameters in a DB cluster parameter group you use the describe-db-cluster-parameters Amazon CLI command as follows:

```
aws rds describe-db-cluster-parameters --db-cluster-parameter-group-name
 default.aurora-postgresql12
```

The command returns detailed JSON descriptions of each parameter. To reduce the amount of information returned, you can specify what you want by using the `--query` option. For example, you can get the parameter name, its description, and allowed values for the default Aurora PostgreSQL 12 DB cluster parameter group as follows:

For Linux, macOS, or Unix:

```
aws rds describe-db-cluster-parameters --db-cluster-parameter-group-name
 default.aurora-postgresql12 \
    --query 'Parameters[].
[{ParameterName:ParameterName,Description:Description,ApplyType:ApplyType,AllowedValues:Allowed
```

For Windows:

```
aws rds describe-db-cluster-parameters --db-cluster-parameter-group-name
 default.aurora-postgresql12 ^
    --query "Parameters[].
[{ParameterName:ParameterName,Description:Description,ApplyType:ApplyType,AllowedValues:Allowed
```

An Aurora DB cluster parameter group includes the DB instance parameter group and default values for a given Aurora DB engine. You can get the list of DB parameters from the same default Aurora PostgreSQL default parameter group by usng the describe-db-parameters Amazon CLI command as shown following.

For Linux, macOS, or Unix:

```
aws rds describe-db-parameters --db-parameter-group-name default.aurora-postgresql12 \
    --query 'Parameters[].
[{ParameterName:ParameterName,Description:Description,ApplyType:ApplyType,AllowedValues:Allowed
```

For Windows:

```
aws rds describe-db-parameters --db-parameter-group-name default.aurora-postgresql12 ^
    --query "Parameters[].
[{ParameterName:ParameterName,Description:Description,ApplyType:ApplyType,AllowedValues:Allowed
```

The preceding commands return lists of parameters from the DB cluster or DB parameter group with descriptions and other details specified in the query. Following is an example response.

```
[
    [
        {
            "ParameterName": "apg_enable_batch_mode_function_execution",
            "ApplyType": "dynamic",
            "Description": "Enables batch-mode functions to process sets of rows at a
 time.",
            "AllowedValues": "0,1"
        }
    ],
    [
        {
            "ParameterName": "apg_enable_correlated_any_transform",
            "ApplyType": "dynamic",
            "Description": "Enables the planner to transform correlated ANY Sublink
 (IN/NOT IN subquery) to JOIN when possible.",
            "AllowedValues": "0,1"
        }
    ],...
```

Following are tables containing values for the default DB cluster parameter and DB parameter for Aurora PostgreSQL version 14.

Aurora PostgreSQL cluster-level parameters

You can view the cluster-level parameters available for a specific Aurora PostgreSQL version using the Amazon Management console, the Amazon CLI, or the Amazon RDS API. For information about viewing the parameters in an Aurora PostgreSQL DB cluster parameter groups in the RDS console, see Viewing parameter values for a DB cluster parameter groupin Amazon Aurora.

Some cluster-level parameters aren't available in all versions and some are being deprecated. For information about viewing the parameters of a specific Aurora PostgreSQL version, see Viewing Aurora PostgreSQL DB cluster and DB parameters.

For example, the following table lists the parameters available in the default DB cluster parameter group for Aurora PostgreSQL version 14. If you create an Aurora PostgreSQL DB cluster without specifying your own custom DB parameter group, your DB cluster is created using the default Aurora DB cluster parameter group for the version chosen, such as `default.aurora-postgresql14`, `default.aurora-postgresql13`, and so on.

For a listing of the DB instance parameters for this same default DB cluster parameter group, see Aurora PostgreSQL instance-level parameters.

Parameter name	Description	Default
ansi_constraint_trigger_ordering	Change the firing order of constraint triggers to be compatible with the ANSI SQL standard.	–
ansi_force_foreign_key_checks	Ensure referential actions such as cascaded delete or cascaded update will always occur regardless of the various trigger contexts that exist for the action.	–
ansi_qualified_update_set_target	Support table and schema qualifiers in UPDATE ... SET statements.	–
apg_ccm_enabled	Enable or disable cluster cache management for the cluster.	–
apg_enable_batch_mode_function_execution	Enables batch-mode functions to process sets of rows at a time.	–

Parameter name	Description	Default
apg_enable_correlated_any_transform	Enables the planner to transform correlated ANY Sublink (IN/NOT IN subquery) to JOIN when possible.	–
apg_enable_function_migration	Enables the planner to migrate eligible scalar functions to the FROM clause.	–
apg_enable_not_in_transform	Enables the planner to transform NOT IN subquery to ANTI JOIN when possible.	–
apg_enable_remove_redundant_inner_joins	Enables the planner to remove redundant inner joins.	–
apg_enable_semijoin_push_down	Enables the use of semijoin filters for hash joins.	–
apg_plan_mgmt.capture_plan_baselines	Capture plan baseline mode. manual - enable plan capture for any SQL statement, off - disable plan capture, automatic - enable plan capture for for statements in pg_stat_statements that satisfy the eligibility criteria.	off
apg_plan_mgmt.max_databases	Sets the maximum number of databases that that may manage queries using apg_plan_mgmt.	10
apg_plan_mgmt.max_plans	Sets the maximum number of plans that may be cached by apg_plan_mgmt.	10000
apg_plan_mgmt.plan_retention_period	Maximum number of days since a plan was last_used before a plan will be automatically deleted.	32

Parameter name	Description	Default
apg_plan_mgmt.unapproved_plan_execution_threshold	Estimated total plan cost below which an Unapproved plan will be executed.	0
apg_plan_mgmt.use_plan_baselines	Use only approved or fixed plans for managed statements.	false
application_name	Sets the application name to be reported in statistics and logs.	–
array_nulls	Enable input of NULL elements in arrays.	–

Parameter name	Description	Default
aurora.enhanced_logical_replication	Specifies whether Aurora enhanced logical replication is turned on. Aurora zero-ETL integrations require this feature. This parameter requires `rds.logical_replication` to be set to 1. When this parameter is on, Aurora PostgreSQL writes all column values to the write-ahead log (WAL) for UPDATE and DELETE operations on every table in the DB cluster, even if `REPLICA IDENTITY FULL` isn't set. This might increase the IOPS for the DB cluster, and Aurora PostgreSQL doesn't use the logical replication write-through cache (`rds.logical_wal_cache`). To turn on this parameter, set `aurora.logical_replication_backup` and `aurora.logical_replication_globaldb` to 0 in the same request. To turn it off, set them back to 1 in the same request. Changing this parameter invalidates all logical replication slots on the DB cluster, so keep the parameter state consistent while replication is in use. This parameter is static and is available in Aurora PostgreSQL 16 and higher. For more information, see Getting started with Aurora zero-ETL integrations.	–

Parameter name	Description	Default
aurora.logical_replication_backup	A companion parameter of `aurora.enhanced_logical_replication`. Set this parameter to 0 to turn on Aurora enhanced logical replication. You can set it to 0 only when you turn on enhanced logical replication in the same request. This parameter is available in Aurora PostgreSQL 16 and higher. For more information, see Getting started with Aurora zero-ETL integrations.	1
aurora.logical_replication_globaldb	A companion parameter of `aurora.enhanced_logical_replication`. Set this parameter to 0 to turn on Aurora enhanced logical replication. You can set it to 0 only when you turn on enhanced logical replication in the same request. This parameter is available in Aurora PostgreSQL 16 and higher. For more information, see Getting started with Aurora zero-ETL integrations.	1
aurora_compute_plan_id	Monitors query execution plans to detect the execution plans contributing to current database load and to track performance statistics of execution plans over time. For more information, see Monitoring query execution plans for Aurora PostgreSQL.	off
authentication_timeout	(s) Sets the maximum allowed time to complete client authentication.	–
auto_explain.log_analyze	Use EXPLAIN ANALYZE for plan logging.	–

Parameter name	Description	Default
auto_explain.log_buffers	Log buffers usage.	–
auto_explain.log_format	EXPLAIN format to be used for plan logging.	–
auto_explain.log_min_duration	Sets the minimum execution time above which plans will be logged.	–
auto_explain.log_nested_statements	Log nested statements.	–
auto_explain.log_timing	Collect timing data, not just row counts.	–
auto_explain.log_triggers	Include trigger statistics in plans.	–
auto_explain.log_verbose	Use EXPLAIN VERBOSE for plan logging.	–
auto_explain.sample_rate	Fraction of queries to process.	–
autovacuum	Starts the autovacuum subprocess.	–
autovacuum_analyze_scale_factor	Number of tuple inserts, updates or deletes prior to analyze as a fraction of reltuples.	0.05
autovacuum_analyze_threshold	Minimum number of tuple inserts, updates or deletes prior to analyze.	–
autovacuum_freeze_max_age	Age at which to autovacuum a table to prevent transaction ID wraparound.	–
autovacuum_max_workers	Sets the maximum number of simultaneously running autovacuum worker processes.	GREATEST(DBInstanceClassMemory/64371566592,3)

Parameter name	Description	Default
autovacuum_multixact_freeze_max_age	Multixact age at which to autovacuum a table to prevent multixact wraparound.	–
autovacuum_naptime	(s) Time to sleep between autovacuum runs.	5
autovacuum_vacuum_cost_delay	(ms) Vacuum cost delay in milliseconds, for autovacuum.	5
autovacuum_vacuum_cost_limit	Vacuum cost amount available before napping, for autovacuum.	GREATEST(log(DBInstanceClassMemory/21474836480)*600,200)
autovacuum_vacuum_insert_scale_factor	Number of tuple inserts prior to vacuum as a fraction of reltuples.	–
autovacuum_vacuum_insert_threshold	Minimum number of tuple inserts prior to vacuum, or -1 to disable insert vacuums.	–
autovacuum_vacuum_scale_factor	Number of tuple updates or deletes prior to vacuum as a fraction of reltuples.	0.1
autovacuum_vacuum_threshold	Minimum number of tuple updates or deletes prior to vacuum.	–
autovacuum_work_mem	(kB) Sets the maximum memory to be used by each autovacuum worker process.	GREATEST(DBInstanceClassMemory/32768,131072)
babelfishpg_tds.default_server_name	Default Babelfish server name	Microsoft SQL Server

Parameter name	Description	Default
babelfishpg_tds.listen_addresses	Sets the host name or IP address(es) to listen TDS to.	*
babelfishpg_tds.port	Sets the TDS TCP port the server listens on.	1433
babelfishpg_tds.tds_debug_log_level	Sets logging level in TDS, 0 disables logging	1
babelfishpg_tds.tds_default_numeric_precision	Sets the default precision of numeric type to be sent in the TDS column metadata if the engine does not specify one.	38
babelfishpg_tds.tds_default_numeric_scale	Sets the default scale of numeric type to be sent in the TDS column metadata if the engine does not specify one.	8
babelfishpg_tds.tds_default_packet_size	Sets the default packet size for all the SQL Server clients being connected	4096
babelfishpg_tds.tds_default_protocol_version	Sets a default TDS protocol version for all the clients being connected	DEFAULT
babelfishpg_tds.tds_ssl_encrypt	Sets the SSL Encryption option	0
babelfishpg_tds.tds_ssl_max_protocol_version	Sets the maximum SSL/TLS protocol version to use for tds session.	TLSv1.2
babelfishpg_tds.tds_ssl_min_protocol_version	Sets the minimum SSL/TLS protocol version to use for tds session.	TLSv1.2 from Aurora PostgreSQL version 16, TLSv1 for versions older than Aurora PostgreSQL version 16

Parameter name	Description	Default
babelfishpg_tsql.default_locale	Default locale to be used for collations created by CREATE COLLATION.	en-US
babelfishpg_tsql.migration_mode	Defines if multiple user databases are supported	multi-db from Aurora PostgreSQL version 16, single-db for versions older than Aurora PostgreSQL version 16
babelfishpg_tsql.server_collation_name	Name of the default server collation	sql_latin1_general_cp1_ci_as
babelfishpg_tsql.version	Sets the output of @@VERSION variable	default
backend_flush_after	(8Kb) Number of pages after which previously performed writes are flushed to disk.	–
backslash_quote	Sets whether \\ is allowed in string literals.	–
backtrace_functions	Log backtrace for errors in these functions.	–
bytea_output	Sets the output format for bytea.	–
check_function_bodies	Check function bodies during CREATE FUNCTION.	–
client_connection_check_interval	Sets the time interval between checks for disconnection while running queries.	–
client_encoding	Sets the clients character set encoding.	UTF8
client_min_messages	Sets the message levels that are sent to the client.	–
compute_query_id	Compute query identifiers.	auto

Parameter name	Description	Default
config_file	Sets the servers main configuration file.	/rdsdbdata/config/postgresql.conf
constraint_exclusion	Enables the planner to use constraints to optimize queries.	–
cpu_index_tuple_cost	Sets the planners estimate of the cost of processing each index entry during an index scan.	–
cpu_operator_cost	Sets the planners estimate of the cost of processing each operator or function call.	–
cpu_tuple_cost	Sets the planners estimate of the cost of processing each tuple (row).	–
cron.database_name	Sets the database to store pg_cron metadata tables	postgres
cron.log_run	Log all jobs runs into the job_run_details table	on
cron.log_statement	Log all cron statements prior to execution.	off
cron.max_running_jobs	Maximum number of jobs that can run concurrently.	5
cron.use_background_workers	Enables background workers for pg_cron	on
cursor_tuple_fraction	Sets the planners estimate of the fraction of a cursors rows that will be retrieved.	–
data_directory	Sets the servers data directory.	/rdsdbdata/db
datestyle	Sets the display format for date and time values.	–
db_user_namespace	Enables per-database user names.	–

Parameter name	Description	Default
deadlock_timeout	(ms) Sets the time to wait on a lock before checking for deadlock.	–
debug_pretty_print	Indents parse and plan tree displays.	–
debug_print_parse	Logs each querys parse tree.	–
debug_print_plan	Logs each querys execution plan.	–
debug_print_rewritten	Logs each querys rewritten parse tree.	–
default_statistics_target	Sets the default statistics target.	–
default_tablespace	Sets the default tablespace to create tables and indexes in.	–
default_toast_compression	Sets the default compression method for compressible values.	–
default_transaction_deferrable	Sets the default deferrable status of new transactions.	–
default_transaction_isolation	Sets the transaction isolation level of each new transaction.	–
default_transaction_read_only	Sets the default read-only status of new transactions.	–
effective_cache_size	(8kB) Sets the planners assumption about the size of the disk cache.	SUM(DBInstanceClassMemory/12038,-50003)
effective_io_concurrency	Number of simultaneous requests that can be handled efficiently by the disk subsystem.	–

Parameter name	Description	Default
enable_async_append	Enables the planners use of async append plans.	–
enable_bitmapscan	Enables the planners use of bitmap-scan plans.	–
enable_gathermerge	Enables the planners use of gather merge plans.	–
enable_hashagg	Enables the planners use of hashed aggregation plans.	–
enable_hashjoin	Enables the planners use of hash join plans.	–
enable_incremental_sort	Enables the planners use of incremental sort steps.	–
enable_indexonlyscan	Enables the planners use of index-only-scan plans.	–
enable_indexscan	Enables the planners use of index-scan plans.	–
enable_material	Enables the planners use of materialization.	–
enable_memoize	Enables the planners use of memoization	–
enable_mergejoin	Enables the planners use of merge join plans.	–
enable_nestloop	Enables the planners use of nested-loop join plans.	–
enable_parallel_append	Enables the planners use of parallel append plans.	–
enable_parallel_hash	Enables the planners user of parallel hash plans.	–

Parameter name	Description	Default
enable_partition_pruning	Enable plan-time and run-time partition pruning.	–
enable_partitionwise_aggregate	Enables partitionwise aggregation and grouping.	–
enable_partitionwise_join	Enables partitionwise join.	–
enable_seqscan	Enables the planners use of sequential-scan plans.	–
enable_sort	Enables the planners use of explicit sort steps.	–
enable_tidscan	Enables the planners use of TID scan plans.	–
escape_string_warning	Warn about backslash escapes in ordinary string literals.	–
exit_on_error	Terminate session on any error.	–
extra_float_digits	Sets the number of digits displayed for floating-point values.	–
force_parallel_mode	Forces use of parallel query facilities.	–
from_collapse_limit	Sets the FROM-list size beyond which subqueries are not collapsed.	–
geqo	Enables genetic query optimization.	–
geqo_effort	GEQO: effort is used to set the default for other GEQO parameters.	–
geqo_generations	GEQO: number of iterations of the algorithm.	–
geqo_pool_size	GEQO: number of individuals in the population.	–

Parameter name	Description	Default
geqo_seed	GEQO: seed for random path selection.	–
geqo_selection_bias	GEQO: selective pressure within the populatio n.	–
geqo_threshold	Sets the threshold of FROM items beyond which GEQO is used.	–
gin_fuzzy_search_l imit	Sets the maximum allowed result for exact search by GIN.	–
gin_pending_list_l imit	(kB) Sets the maximum size of the pending list for GIN index.	–
hash_mem_multiplier	Multiple of work_mem to use for hash tables.	–
hba_file	Sets the servers hba configuration file.	/rdsdbdata/config/ pg_hba.conf
hot_standby_feedba ck	Allows feedback from a hot standby to the primary that will avoid query conflicts.	on
huge_pages	Reduces overhead when a DB instance is working with large contiguous chunks of memory, such as that used by shared buffers. It is turned on by default for all the DB instance classes other than t3.medium,db.t3.la rge,db.t4g.medium,db.t4g.large instance classes.	on
ident_file	Sets the servers ident configuration file.	/rdsdbdata/config/ pg_ident.conf
idle_in_transactio n_session_timeout	(ms) Sets the maximum allowed duration of any idling transaction.	86400000

Parameter name	Description	Default
idle_session_timeout	Terminate any session that has been idle (that is, waiting for a client query), but not within an open transaction, for longer than the specified amount of time	–
intervalstyle	Sets the display format for interval values.	–
join_collapse_limit	Sets the FROM-list size beyond which JOIN constructs are not flattened.	–
krb_caseins_users	Sets whether GSSAPI (Generic Security Service API) user names should be treated case-insensitively (true) or not. By default, this parameter is set to false, so Kerberos expects user names to be case sensitive. For more information, see GSSAPI Authentication in the PostgreSQL documentation.	false
lc_messages	Sets the language in which messages are displayed.	–
lc_monetary	Sets the locale for formatting monetary amounts.	–
lc_numeric	Sets the locale for formatting numbers.	–
lc_time	Sets the locale for formatting date and time values.	–
listen_addresses	Sets the host name or IP address(es) to listen to.	*
lo_compat_privileges	Enables backward compatibility mode for privilege checks on large objects.	0
log_autovacuum_min_duration	(ms) Sets the minimum execution time above which autovacuum actions will be logged.	10000

Parameter name	Description	Default
log_connections	Logs each successful connection.	–
log_destination	Sets the destination for server log output.	stderr
log_directory	Sets the destination directory for log files.	/rdsdbdata/log/error
log_disconnections	Logs end of a session, including duration.	–
log_duration	Logs the duration of each completed SQL statement.	–
log_error_verbosity	Sets the verbosity of logged messages.	–
log_executor_stats	Writes executor performance statistics to the server log.	–
log_file_mode	Sets the file permissions for log files.	0644
log_filename	Sets the file name pattern for log files.	postgresql.log.%Y-%m-%d-%H%M
logging_collector	Start a subprocess to capture stderr output and/or csvlogs into log files.	1
log_hostname	Logs the host name in the connection logs.	0
logical_decoding_work_mem	(kB) This much memory can be used by each internal reorder buffer before spilling to disk.	–
log_line_prefix	Controls information prefixed to each log line.	%t:%r:%u@%d:[%p]:
log_lock_waits	Logs long lock waits.	–
log_min_duration_sample	(ms) Sets the minimum execution time above which a sample of statements will be logged. Sampling is determined by log_statement_sample_rate.	–

Parameter name	Description	Default
log_min_duration_statement	(ms) Sets the minimum execution time above which statements will be logged.	–
log_min_error_statement	Causes all statements generating error at or above this level to be logged.	–
log_min_messages	Sets the message levels that are logged.	–
log_parameter_max_length	(B) When logging statements, limit logged parameter values to first N bytes.	–
log_parameter_max_length_on_error	(B) When reporting an error, limit logged parameter values to first N bytes.	–
log_parser_stats	Writes parser performance statistics to the server log.	–
log_planner_stats	Writes planner performance statistics to the server log.	–
log_replication_commands	Logs each replication command.	–
log_rotation_age	(min) Automatic log file rotation will occur after N minutes.	60
log_rotation_size	(kB) Automatic log file rotation will occur after N kilobytes.	100000
log_statement	Sets the type of statements logged.	–
log_statement_sample_rate	Fraction of statements exceeding log_min_duration_sample to be logged.	–
log_statement_stats	Writes cumulative performance statistics to the server log.	–

Parameter name	Description	Default
log_temp_files	(kB) Log the use of temporary files larger than this number of kilobytes.	–
log_timezone	Sets the time zone to use in log messages.	UTC
log_transaction_sample_rate	Set the fraction of transactions to log for new transactions.	–
log_truncate_on_rotation	Truncate existing log files of same name during log rotation.	0
maintenance_io_concurrency	A variant of effective_io_concurrency that is used for maintenance work.	1
maintenance_work_mem	(kB) Sets the maximum memory to be used for maintenance operations.	GREATEST(DBInstanceClassMemory/63963136*1024,65536)
max_connections	Sets the maximum number of concurrent connections.	LEAST(DBInstanceClassMemory/9531392,5000)
max_files_per_process	Sets the maximum number of simultaneously open files for each server process.	–
max_locks_per_transaction	Sets the maximum number of locks per transaction.	64
max_logical_replication_workers	Maximum number of logical replication worker processes.	–
max_parallel_maintenance_workers	Sets the maximum number of parallel processes per maintenance operation.	–
max_parallel_workers	Sets the maximum number of parallel workers than can be active at one time.	GREATEST($DBInstanceVCPU/2,8)

Parameter name	Description	Default
max_parallel_workers_per_gather	Sets the maximum number of parallel processes per executor node.	–
max_pred_locks_per_page	Sets the maximum number of predicate-locked tuples per page.	–
max_pred_locks_per_relation	Sets the maximum number of predicate-locked pages and tuples per relation.	–
max_pred_locks_per_transaction	Sets the maximum number of predicate locks per transaction.	–
max_prepared_transactions	Sets the maximum number of simultaneously prepared transactions.	0
max_replication_slots	Sets the maximum number of replication slots that the server can support.	20
max_slot_wal_keep_size	(MB) Replication slots will be marked as failed, and segments released for deletion or recycling, if this much space is occupied by WAL on disk.	–
max_stack_depth	(kB) Sets the maximum stack depth, in kilobytes.	6144
max_standby_streaming_delay	(ms) Sets the maximum delay before canceling queries when a hot standby server is processing streamed WAL data.	14000
max_sync_workers_per_subscription	Maximum number of synchronization workers per subscription	2
max_wal_senders	Sets the maximum number of simultaneously running WAL sender processes.	10

Parameter name	Description	Default
max_worker_processes	Sets the maximum number of concurrent worker processes.	GREATEST($DBInstanceVCPU*2,8)
min_dynamic_shared_memory	(MB) Amount of dynamic shared memory reserved at startup.	–
min_parallel_index_scan_size	(8kB) Sets the minimum amount of index data for a parallel scan.	–
min_parallel_table_scan_size	(8kB) Sets the minimum amount of table data for a parallel scan.	–
old_snapshot_threshold	(min) Time before a snapshot is too old to read pages changed after the snapshot was taken.	–
orafce.nls_date_format	Emulate oracles date output behaviour.	–
orafce.timezone	Specify timezone used for sysdate function.	–
parallel_leader_participation	Controls whether Gather and Gather Merge also run subplans.	–
parallel_setup_cost	Sets the planners estimate of the cost of starting up worker processes for parallel query.	–
parallel_tuple_cost	Sets the planners estimate of the cost of passing each tuple (row) from worker to master backend.	–
password_encryption	Encrypt passwords.	–
pgaudit.log	Specifies which classes of statements will be logged by session audit logging.	–

Parameter name	Description	Default
pgaudit.log_catalog	Specifies that session logging should be enabled in the case where all relations in a statement are in pg_catalog.	–
pgaudit.log_level	Specifies the log level that will be used for log entries.	–
pgaudit.log_parameter	Specifies that audit logging should include the parameters that were passed with the statement.	–
pgaudit.log_relation	Specifies whether session audit logging should create a separate log entry for each relation (TABLE, VIEW, and so on) referenced in a SELECT or DML statement.	–
pgaudit.log_statement_once	Specifies whether logging will include the statement text and parameters with the first log entry for a statement/substatement combination or with every entry.	–
pgaudit.role	Specifies the master role to use for object audit logging.	–
pg_bigm.enable_recheck	It specifies whether to perform Recheck which is an internal process of full text search.	on
pg_bigm.gin_key_limit	It specifies the maximum number of 2-grams of the search keyword to be used for full text search.	0
pg_bigm.last_update	It reports the last updated date of the pg_bigm module.	2013.11.22
pg_bigm.similarity_limit	It specifies the minimum threshold used by the similarity search.	0.3

Parameter name	Description	Default
pg_hint_plan.debug_print	Logs results of hint parsing.	–
pg_hint_plan.enable_hint	Force planner to use plans specified in the hint comment preceding to the query.	–
pg_hint_plan.enable_hint_table	Force planner to not get hint by using table lookups.	–
pg_hint_plan.message_level	Message level of debug messages.	–
pg_hint_plan.parse_messages	Message level of parse errors.	–
pglogical.batch_inserts	Batch inserts if possible	–
pglogical.conflict_log_level	Sets log level used for logging resolved conflicts.	–
pglogical.conflict_resolution	Sets method used for conflict resolution for resolvable conflicts.	–
pglogical.extra_connection_options	connection options to add to all peer node connections	–
pglogical.synchronous_commit	pglogical specific synchronous commit value	–
pglogical.use_spi	Use SPI instead of low-level API for applying changes	–
pgtle.clientauth_databases_to_skip	List of databases to skip for clientauth feature.	–
pgtle.clientauth_db_name	Controls which database is used for clientauth feature.	–

Parameter name	Description	Default
pgtle.clientauth_num_parallel_workers	Number of background workers used for clientauth feature.	–
pgtle.clientauth_users_to_skip	List of users to skip for clientauth feature.	–
pgtle.enable_clientauth	Enables the clientauth feature.	–
pgtle.passcheck_db_name	Sets which database is used for cluster-wide passcheck feature.	–
pg_prewarm.autoprewarm	Starts the autoprewarm worker.	–
pg_prewarm.autoprewarm_interval	Sets the interval between dumps of shared buffers	–
pg_similarity.block_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.block_threshold	Sets the threshold used by the Block similarity function.	–
pg_similarity.block_tokenizer	Sets the tokenizer for Block similarity function.	–
pg_similarity.cosine_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.cosine_threshold	Sets the threshold used by the Cosine similarity function.	–
pg_similarity.cosine_tokenizer	Sets the tokenizer for Cosine similarity function.	–
pg_similarity.dice_is_normalized	Sets if the result value is normalized or not.	–

Parameter name	Description	Default
pg_similarity.dice_threshold	Sets the threshold used by the Dice similarity measure.	–
pg_similarity.dice_tokenizer	Sets the tokenizer for Dice similarity measure.	–
pg_similarity.euclidean_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.euclidean_threshold	Sets the threshold used by the Euclidean similarity measure.	–
pg_similarity.euclidean_tokenizer	Sets the tokenizer for Euclidean similarity measure.	–
pg_similarity.hamming_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.hamming_threshold	Sets the threshold used by the Block similarity metric.	–
pg_similarity.jaccard_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.jaccard_threshold	Sets the threshold used by the Jaccard similarity measure.	–
pg_similarity.jaccard_tokenizer	Sets the tokenizer for Jaccard similarity measure.	–
pg_similarity.jaro_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.jaro_threshold	Sets the threshold used by the Jaro similarity measure.	–

Parameter name	Description	Default
pg_similarity.jarowinkler_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.jarowinkler_threshold	Sets the threshold used by the Jarowinkler similarity measure.	–
pg_similarity.levenshtein_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.levenshtein_threshold	Sets the threshold used by the Levenshtein similarity measure.	–
pg_similarity.matching_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.matching_threshold	Sets the threshold used by the Matching Coefficient similarity measure.	–
pg_similarity.matching_tokenizer	Sets the tokenizer for Matching Coefficient similarity measure.	–
pg_similarity.mongeelkan_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.mongeelkan_threshold	Sets the threshold used by the Monge-Elkan similarity measure.	–
pg_similarity.mongeelkan_tokenizer	Sets the tokenizer for Monge-Elkan similarity measure.	–
pg_similarity.nw_gap_penalty	Sets the gap penalty used by the Needleman-Wunsch similarity measure.	–
pg_similarity.nw_is_normalized	Sets if the result value is normalized or not.	–

Parameter name	Description	Default
pg_similarity.nw_threshold	Sets the threshold used by the Needleman-Wunsch similarity measure.	–
pg_similarity.overlap_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.overlap_threshold	Sets the threshold used by the Overlap Coefficient similarity measure.	–
pg_similarity.overlap_tokenizer	Sets the tokenizer for Overlap Coefficientsimilarity measure.	–
pg_similarity.qgram_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.qgram_threshold	Sets the threshold used by the Q-Gram similarity measure.	–
pg_similarity.qgram_tokenizer	Sets the tokenizer for Q-Gram measure.	–
pg_similarity.swg_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.swg_threshold	Sets the threshold used by the Smith-Waterman-Gotoh similarity measure.	–
pg_similarity.sw_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.sw_threshold	Sets the threshold used by the Smith-Waterman similarity measure.	–
pg_stat_statements.max	Sets the maximum number of statements tracked by pg_stat_statements.	–
pg_stat_statements.save	Save pg_stat_statements statistics across server shutdowns.	–

Parameter name	Description	Default
pg_stat_statements.track	Selects which statements are tracked by pg_stat_statements.	–
pg_stat_statements.track_planning	Selects whether planning duration is tracked by pg_stat_statements.	–
pg_stat_statements.track_utility	Selects whether utility commands are tracked by pg_stat_statements.	–
plan_cache_mode	Controls the planner selection of custom or generic plan.	–
port	Sets the TCP port the server listens on.	EndPointPort
postgis.gdal_enabled_drivers	Enable or disable GDAL drivers used with PostGIS in Postgres 9.3.5 and above.	ENABLE_ALL
quote_all_identifiers	When generating SQL fragments, quote all identifiers.	–
random_page_cost	Sets the planners estimate of the cost of a nonsequentially fetched disk page.	–
rdkit.dice_threshold	Lower threshold of Dice similarity. Molecules with similarity lower than threshold are not similar by # operation.	–
rdkit.do_chiral_sss	Should stereochemistry be taken into account in substructure matching. If false, no stereochemistry information is used in substructure matches.	–
rdkit.tanimoto_threshold	Lower threshold of Tanimoto similarity. Molecules with similarity lower than threshold are not similar by % operation.	–

Parameter name	Description	Default
rds.accepted_password_auth_method	Force authentication for connections with password stored locally.	md5+scram
rds.adaptive_autovacuum	RDS parameter to enable/disable adaptive autovacuum.	1
rds.babelfish_status	RDS parameter to enable/disable Babelfish for Aurora PostgreSQL.	off
rds.enable_plan_management	Enable or disable the apg_plan_mgmt extension.	0

Parameter name	Description	Default
rds.extensions	List of extensions provided by RDS	address_standardizer, address_standardizer_data_us, apg_plan_mgmt, aurora_stat_utils, amcheck, autoinc, aws_commons, aws_ml, aws_s3, aws_lambda, bool_plperl, bloom, btree_gin, btree_gist, citext, cube, dblink, dict_int, dict_xsyn, earthdistance, fuzzystrmatch, hll, hstore, hstore_plperl, insert_username, intagg, intarray, ip4r, isn, jsonb_plperl, lo, log_fdw, ltree, moddatetime, old_snapshot, oracle_fdw, orafce, pgaudit, pgcrypto, pglogical, pgrouting, pgrowlocks, pgstattuple, pgtap, pg_bigm, pg_buffercache, pg_cron, pg_freespacemap, pg_hint_plan, pg_partman, pg_prewarm, pg_proctab,

Parameter name	Description	Default
		pg_repack, pg_similarity, pg_stat_statements, pg_trgm, pg_visibility, plcoffee, plls, plperl, plpgsql, plprofiler, pltcl, plv8, postgis, postgis_tiger_geocoder, postgis_raster, postgis_topology, postgres_fdw, prefix, rdkit, rds_tools, refint, sslinfo, tablefunc, tds_fdw, test_parser, tsm_system_rows, tsm_system_time, unaccent, uuid-ossp
rds.force_admin_logging_level	See log messages for RDS admin user actions in customer databases.	–
rds.force_autovacuum_logging_level	See log messages related to autovacuum operations.	WARNING
rds.force_ssl	Force SSL connections.	0

Parameter name	Description	Default
rds.global_db_rpo	(s) Recovery point objective threshold, in seconds, that blocks user commits when it is violated. **Important** This parameter is meant for Aurora PostgreSQL-based global databases. For a nonglobal database, leave it at the default value. For more informati on about using this parameter, see the section called “Managing RPOs (Aurora PostgreSQL)”.	–
rds.logical_replication	Enables logical decoding.	0
rds.logically_repl icate_unlogged_tab les	Unlogged tables are logically replicated.	1
rds.log_retention_ period	Amazon RDS will delete PostgreSQL log that are older than N minutes.	4320
rds.pg_stat_ramdis k_size	Size of the stats ramdisk in MB. A nonzero value will setup the ramdisk. This parameter is only available in Aurora PostgreSQL 14 and lower versions.	0
rds.rds_superuser_ reserved_connections	Sets the number of connection slots reserved for rds_superusers. This parameter is only available in versions 15 and earlier. For more information, see the PostgreSQL documenta tion reserved connections.	2
rds.restrict_passw ord_commands	restricts password-related commands to members of rds_password	–

Parameter name	Description	Default
rds.superuser_variables	List of superuser-only variables for which we elevate rds_superuser modification statements.	session_replication_role
recovery_init_sync_method	Sets the method for synchronizing the data directory before crash recovery.	syncfs
remove_temp_files_after_crash	Remove temporary files after backend crash.	0
restart_after_crash	Reinitialize server after backend crash.	–
row_security	Enable row security.	–
search_path	Sets the schema search order for names that are not schema-qualified.	–
seq_page_cost	Sets the planners estimate of the cost of a sequentially fetched disk page.	–
session_replication_role	Sets the sessions behavior for triggers and rewrite rules.	–
shared_buffers	(8kB) Sets the number of shared memory buffers used by the server.	SUM(DBInstanceClassMemory/12038,-50003)
shared_preload_libraries	Lists shared libraries to preload into server.	pg_stat_statements
ssl	Enables SSL connections.	1
ssl_ca_file	Location of the SSL server authority file.	/rdsdbdata/rds-metadata/ca-cert.pem
ssl_cert_file	Location of the SSL server certificate file.	/rdsdbdata/rds-metadata/server-cert.pem

Parameter name	Description	Default
ssl_ciphers	Sets the list of ciphers allowed for secure connections using TLS 1.2.	TLS_RSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384, TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384
ssl_tls13_ciphers	Sets the list of ciphers allowed for secure connections using TLS 1.3.	TLS_AES_128_GCM_SHA256, TLS_AES_256_GCM_SHA384
ssl_crl_dir	Location of the SSL certificate revocation list directory.	/rdsdbdata/rds-metadata/ssl_crl_dir/

Parameter name	Description	Default
ssl_key_file	Location of the SSL server private key file	/rdsdbdata/rds-metadata/server-key.pem
ssl_max_protocol_version	Sets the maximum SSL/TLS protocol version allowed	–
ssl_min_protocol_version	Sets the minimum SSL/TLS protocol version allowed	TLSv1.2
standard_conforming_strings	Causes ... strings to treat backslashes literally.	–
statement_timeout	(ms) Sets the maximum allowed duration of any statement.	–
stats_temp_directory	Writes temporary statistics files to the specified directory.	/rdsdbdata/db/pg_stat_tmp
superuser_reserved_connections	Sets the number of connection slots reserved for superusers.	3
synchronize_seqscans	Enable synchronized sequential scans.	–
synchronous_commit	Sets the current transactions synchronization level.	on
tcp_keepalives_count	Maximum number of TCP keepalive retransmits.	–
tcp_keepalives_idle	(s) Time between issuing TCP keepalives.	–
tcp_keepalives_interval	(s) Time between TCP keepalive retransmits.	–
temp_buffers	(8kB) Sets the maximum number of temporary buffers used by each session.	–

Parameter name	Description	Default
temp_file_limit	Constrains the total amount disk space in kilobytes that a given PostgreSQL process can use for temporary files, excluding space used for explicit temporary tables	-1
temp_tablespaces	Sets the tablespace(s) to use for temporary tables and sort files.	–
timezone	Sets the time zone for displaying and interpreting time stamps.	UTC
track_activities	Collects information about executing commands.	–
track_activity_query_size	Sets the size reserved for pg_stat_activity.current_query, in bytes.	4096
track_commit_timestamp	Collects transaction commit time.	–
track_counts	Collects statistics on database activity.	–
track_functions	Collects function-level statistics on database activity.	pl
track_io_timing	Collects timing statistics on database IO activity.	1
track_wal_io_timing	Collects timing statistics for WAL I/O activity.	–
transform_null_equals	Treats expr=NULL as expr IS NULL.	–
update_process_title	Updates the process title to show the active SQL command.	–
vacuum_cost_delay	(ms) Vacuum cost delay in milliseconds.	–

Parameter name	Description	Default
vacuum_cost_limit	Vacuum cost amount available before napping.	–
vacuum_cost_page_dirty	Vacuum cost for a page dirtied by vacuum.	–
vacuum_cost_page_hit	Vacuum cost for a page found in the buffer cache.	–
vacuum_cost_page_miss	Vacuum cost for a page not found in the buffer cache.	0
vacuum_defer_cleanup_age	Number of transactions by which VACUUM and HOT cleanup should be deferred, if any.	–
vacuum_failsafe_age	Age at which VACUUM should trigger failsafe to avoid a wraparound outage.	1200000000
vacuum_freeze_min_age	Minimum age at which VACUUM should freeze a table row.	–
vacuum_freeze_table_age	Age at which VACUUM should scan whole table to freeze tuples.	–
vacuum_multixact_failsafe_age	Multixact age at which VACUUM should trigger failsafe to avoid a wraparound outage.	1200000000
vacuum_multixact_freeze_min_age	Minimum age at which VACUUM should freeze a MultiXactId in a table row.	–
vacuum_multixact_freeze_table_age	Multixact age at which VACUUM should scan whole table to freeze tuples.	–
wal_buffers	(8kB) Sets the number of disk-page buffers in shared memory for WAL.	–

Parameter name	Description	Default
wal_receiver_create_temp_slot	Sets whether a WAL receiver should create a temporary replication slot if no permanent slot is configured.	0
wal_receiver_status_interval	(s) Sets the maximum interval between WAL receiver status reports to the primary.	–
wal_receiver_timeout	(ms) Sets the maximum wait time to receive data from the primary.	30000
wal_sender_timeout	(ms) Sets the maximum time to wait for WAL replication.	–
work_mem	(kB) Sets the maximum memory to be used for query workspaces.	–
xmlbinary	Sets how binary values are to be encoded in XML.	–
xmloption	Sets whether XML data in implicit parsing and serialization operations is to be considered as documents or content fragments.	–

Aurora PostgreSQL instance-level parameters

You can view the instance-level parameters available for a specific Aurora PostgreSQL version using the Amazon Management console, the Amazon CLI, or the Amazon RDS API. For information about viewing the parameters in an Aurora PostgreSQL DB parameter groups in the RDS console, see Viewing parameter values for a DB parameter group in Amazon Aurora.

Some instance-level parameters aren't available in all versions and some are being deprecated. For information about viewing the parameters of a specific Aurora PostgreSQL version, see Viewing Aurora PostgreSQL DB cluster and DB parameters.

For example, the following table lists the parameters that apply to a specific DB instance in an Aurora PostgreSQL DB cluster. This list was generated by running the describe-db-parameters Amazon CLI command with `default.aurora-postgresql14` for the `--db-parameter-group-name` value.

For a listing of the DB cluster parameters for this same default DB parameter group, see Aurora PostgreSQL cluster-level parameters.

Parameter name	Description	Default
apg_enable_batch_mode_function_execution	Enables batch-mode functions to process sets of rows at a time.	–
apg_enable_correlated_any_transform	Enables the planner to transform correlated ANY Sublink (IN/NOT IN subquery to JOIN when possible.	–
apg_enable_function_migration	Enables the planner to migrate eligible scalar functions to the FROM clause.	–
apg_enable_not_in_transform	Enables the planner to transform NOT IN subquery to ANTI JOIN when possible.	–
apg_enable_remove_redundant_inner_joins	Enables the planner to remove redundant inner joins.	–

Parameter name	Description	Default
apg_enable_semijoin_push_down	Enables the use of semijoin filters for hash joins.	–
apg_plan_mgmt.capture_plan_baselines	Capture plan baseline mode. manual - enable plan capture for any SQL statement, off - disable plan capture, automatic - enable plan capture for for statements in pg_stat_statements that satisfy the eligibility criteria.	off
apg_plan_mgmt.max_databases	Sets the maximum number of databases that that may manage queries using apg_plan_mgmt.	10
apg_plan_mgmt.max_plans	Sets the maximum number of plans that may be cached by apg_plan_mgmt.	10000
apg_plan_mgmt.plan_retention_period	Maximum number of days since a plan was last_used before a plan will be automatically deleted.	32
apg_plan_mgmt.unapproved_plan_execution_threshold	Estimated total plan cost below which an Unapproved plan will be executed.	0
apg_plan_mgmt.use_plan_baselines	Use only approved or fixed plans for managed statements.	false
application_name	Sets the application name to be reported in statistics and logs.	–
aurora_compute_plan_id	Monitors query execution plans to detect the execution plans contributing to current database load and to track performance statistics of execution plans over time. For more information, see Monitoring query execution plans for Aurora PostgreSQL.	off

Parameter name	Description	Default
aurora_temp_space_size	(MB) Sets size of the allocated space for Optimized Reads-enabled temporary objects on Aurora I/O-Optimized clusters with supported instance classes.	DBInstanceClassMemory/524288
authentication_timeout	(s Sets the maximum allowed time to complete client authentication.	–
auto_explain.log_analyze	Use EXPLAIN ANALYZE for plan logging.	–
auto_explain.log_buffers	Log buffers usage.	–
auto_explain.log_format	EXPLAIN format to be used for plan logging.	–
auto_explain.log_min_duration	Sets the minimum execution time above which plans will be logged.	–
auto_explain.log_nested_statements	Log nested statements.	–
auto_explain.log_timing	Collect timing data, not just row counts.	–
auto_explain.log_triggers	Include trigger statistics in plans.	–
auto_explain.log_verbose	Use EXPLAIN VERBOSE for plan logging.	–
auto_explain.sample_rate	Fraction of queries to process.	–
babelfishpg_tds.listen_addresses	Sets the host name or IP address(es to listen TDS to.	*

Parameter name	Description	Default
babelfishpg_tds.tds_debug_log_level	Sets logging level in TDS, 0 disables logging	1
backend_flush_after	(8Kb Number of pages after which previously performed writes are flushed to disk.	–
bytea_output	Sets the output format for bytea.	–
check_function_bodies	Check function bodies during CREATE FUNCTION.	–
client_connection_check_interval	Sets the time interval between checks for disconnection while running queries.	–
client_min_messages	Sets the message levels that are sent to the client.	–
config_file	Sets the servers main configuration file.	/rdsdbdata/config/postgresql.conf
constraint_exclusion	Enables the planner to use constraints to optimize queries.	–
cpu_index_tuple_cost	Sets the planners estimate of the cost of processing each index entry during an index scan.	–
cpu_operator_cost	Sets the planners estimate of the cost of processing each operator or function call.	–
cpu_tuple_cost	Sets the planners estimate of the cost of processing each tuple (row.	–
cron.database_name	Sets the database to store pg_cron metadata tables	postgres
cron.log_run	Log all jobs runs into the job_run_details table	on

Parameter name	Description	Default
cron.log_statement	Log all cron statements prior to execution.	off
cron.max_running_jobs	Maximum number of jobs that can run concurrently.	5
cron.use_background_workers	Enables background workers for pg_cron	on
cursor_tuple_fraction	Sets the planners estimate of the fraction of a cursors rows that will be retrieved.	–
db_user_namespace	Enables per-database user names.	–
deadlock_timeout	(ms Sets the time to wait on a lock before checking for deadlock.	–
debug_pretty_print	Indents parse and plan tree displays.	–
debug_print_parse	Logs each querys parse tree.	–
debug_print_plan	Logs each querys execution plan.	–
debug_print_rewritten	Logs each querys rewritten parse tree.	–
default_statistics_target	Sets the default statistics target.	–
default_transaction_deferrable	Sets the default deferrable status of new transactions.	–
default_transaction_isolation	Sets the transaction isolation level of each new transaction.	–
default_transaction_read_only	Sets the default read-only status of new transactions.	–

Parameter name	Description	Default
effective_cache_size	(8kB Sets the planners assumption about the size of the disk cache.	SUM(DBInstanceClassMemory/12038,-50003
effective_io_concurrency	Number of simultaneous requests that can be handled efficiently by the disk subsystem.	–
enable_async_append	Enables the planners use of async append plans.	–
enable_bitmapscan	Enables the planners use of bitmap-scan plans.	–
enable_gathermerge	Enables the planners use of gather merge plans.	–
enable_hashagg	Enables the planners use of hashed aggregation plans.	–
enable_hashjoin	Enables the planners use of hash join plans.	–
enable_incremental_sort	Enables the planners use of incremental sort steps.	–
enable_indexonlyscan	Enables the planners use of index-only-scan plans.	–
enable_indexscan	Enables the planners use of index-scan plans.	–
enable_material	Enables the planners use of materialization.	–
enable_memoize	Enables the planners use of memoization	–
enable_mergejoin	Enables the planners use of merge join plans.	–
enable_nestloop	Enables the planners use of nested-loop join plans.	–

Parameter name	Description	Default
enable_parallel_append	Enables the planners use of parallel append plans.	–
enable_parallel_hash	Enables the planners user of parallel hash plans.	–
enable_partition_pruning	Enable plan-time and run-time partition pruning.	–
enable_partitionwise_aggregate	Enables partitionwise aggregation and grouping.	–
enable_partitionwise_join	Enables partitionwise join.	–
enable_seqscan	Enables the planners use of sequential-scan plans.	–
enable_sort	Enables the planners use of explicit sort steps.	–
enable_tidscan	Enables the planners use of TID scan plans.	–
escape_string_warning	Warn about backslash escapes in ordinary string literals.	–
exit_on_error	Terminate session on any error.	–
force_parallel_mode	Forces use of parallel query facilities.	–
from_collapse_limit	Sets the FROM-list size beyond which subqueries are not collapsed.	–
geqo	Enables genetic query optimization.	–
geqo_effort	GEQO: effort is used to set the default for other GEQO parameters.	–
geqo_generations	GEQO: number of iterations of the algorithm.	–

Parameter name	Description	Default
geqo_pool_size	GEQO: number of individuals in the populatio n.	–
geqo_seed	GEQO: seed for random path selection.	–
geqo_selection_bias	GEQO: selective pressure within the populatio n.	–
geqo_threshold	Sets the threshold of FROM items beyond which GEQO is used.	–
gin_fuzzy_search_l imit	Sets the maximum allowed result for exact search by GIN.	–
gin_pending_list_l imit	(kB Sets the maximum size of the pending list for GIN index.	–
hash_mem_multiplier	Multiple of work_mem to use for hash tables.	–
hba_file	Sets the servers hba configuration file.	/rdsdbdata/config/ pg_hba.conf
hot_standby_feedba ck	Allows feedback from a hot standby to the primary that will avoid query conflicts.	on
ident_file	Sets the servers ident configuration file.	/rdsdbdata/config/ pg_ident.conf
idle_in_transactio n_session_timeout	(ms Sets the maximum allowed duration of any idling transaction.	86400000
idle_session_timeout	Terminate any session that has been idle (that is, waiting for a client query, but not within an open transaction, for longer than the specified amount of time	–
join_collapse_limit	Sets the FROM-list size beyond which JOIN constructs are not flattened.	–

Parameter name	Description	Default
lc_messages	Sets the language in which messages are displayed.	–
listen_addresses	Sets the host name or IP address(es to listen to.	*
lo_compat_privileges	Enables backward compatibility mode for privilege checks on large objects.	0
log_connections	Logs each successful connection.	–
log_destination	Sets the destination for server log output.	stderr
log_directory	Sets the destination directory for log files.	/rdsdbdata/log/error
log_disconnections	Logs end of a session, including duration.	–
log_duration	Logs the duration of each completed SQL statement.	–
log_error_verbosity	Sets the verbosity of logged messages.	–
log_executor_stats	Writes executor performance statistics to the server log.	–
log_file_mode	Sets the file permissions for log files.	0644
log_filename	Sets the file name pattern for log files.	postgresql.log.%Y-%m-%d-%H%M
logging_collector	Start a subprocess to capture stderr output and/or csvlogs into log files.	1
log_hostname	Logs the host name in the connection logs.	0
logical_decoding_work_mem	(kB This much memory can be used by each internal reorder buffer before spilling to disk.	–
log_line_prefix	Controls information prefixed to each log line.	%t:%r:%u@%d:[%p]:

Parameter name	Description	Default
log_lock_waits	Logs long lock waits.	–
log_min_duration_sample	(ms Sets the minimum execution time above which a sample of statements will be logged. Sampling is determined by log_statement_sample_rate.	–
log_min_duration_statement	(ms Sets the minimum execution time above which statements will be logged.	–
log_min_error_statement	Causes all statements generating error at or above this level to be logged.	–
log_min_messages	Sets the message levels that are logged.	–
log_parameter_max_length	(B When logging statements, limit logged parameter values to first N bytes.	–
log_parameter_max_length_on_error	(B When reporting an error, limit logged parameter values to first N bytes.	–
log_parser_stats	Writes parser performance statistics to the server log.	–
log_planner_stats	Writes planner performance statistics to the server log.	–
log_replication_commands	Logs each replication command.	–
log_rotation_age	(min Automatic log file rotation will occur after N minutes.	60
log_rotation_size	(kB Automatic log file rotation will occur after N kilobytes.	100000
log_statement	Sets the type of statements logged.	–

Parameter name	Description	Default
log_statement_sample_rate	Fraction of statements exceeding log_min_duration_sample to be logged.	–
log_statement_stats	Writes cumulative performance statistics to the server log.	–
log_temp_files	(kB Log the use of temporary files larger than this number of kilobytes.	–
log_timezone	Sets the time zone to use in log messages.	UTC
log_truncate_on_rotation	Truncate existing log files of same name during log rotation.	0
maintenance_io_concurrency	A variant of effective_io_concurrency that is used for maintenance work.	1
maintenance_work_mem	(kB Sets the maximum memory to be used for maintenance operations.	GREATEST(DBInstanceClassMemory/63963136*1024,65536
max_connections	Sets the maximum number of concurrent connections.	LEAST(DBInstanceClassMemory/9531392,5000
max_files_per_process	Sets the maximum number of simultaneously open files for each server process.	–
max_locks_per_transaction	Sets the maximum number of locks per transaction.	64
max_parallel_maintenance_workers	Sets the maximum number of parallel processes per maintenance operation.	–
max_parallel_workers	Sets the maximum number of parallel workers than can be active at one time.	GREATEST($DBInstanceVCPU/2,8

Parameter name	Description	Default
max_parallel_workers_per_gather	Sets the maximum number of parallel processes per executor node.	–
max_pred_locks_per_page	Sets the maximum number of predicate-locked tuples per page.	–
max_pred_locks_per_relation	Sets the maximum number of predicate-locked pages and tuples per relation.	–
max_pred_locks_per_transaction	Sets the maximum number of predicate locks per transaction.	–
max_slot_wal_keep_size	(MB Replication slots will be marked as failed, and segments released for deletion or recycling, if this much space is occupied by WAL on disk.	–
max_stack_depth	(kB Sets the maximum stack depth, in kilobytes.	6144
max_standby_streaming_delay	(ms Sets the maximum delay before canceling queries when a hot standby server is processing streamed WAL data.	14000
max_worker_processes	Sets the maximum number of concurrent worker processes.	GREATEST($DBInstanceVCPU*2,8
min_dynamic_shared_memory	(MB Amount of dynamic shared memory reserved at startup.	–
min_parallel_index_scan_size	(8kB Sets the minimum amount of index data for a parallel scan.	–
min_parallel_table_scan_size	(8kB Sets the minimum amount of table data for a parallel scan.	–

Parameter name	Description	Default
old_snapshot_threshold	(min Time before a snapshot is too old to read pages changed after the snapshot was taken.	–
parallel_leader_participation	Controls whether Gather and Gather Merge also run subplans.	–
parallel_setup_cost	Sets the planners estimate of the cost of starting up worker processes for parallel query.	–
parallel_tuple_cost	Sets the planners estimate of the cost of passing each tuple (row from worker to master backend.	–
pgaudit.log	Specifies which classes of statements will be logged by session audit logging.	–
pgaudit.log_catalog	Specifies that session logging should be enabled in the case where all relations in a statement are in pg_catalog.	–
pgaudit.log_level	Specifies the log level that will be used for log entries.	–
pgaudit.log_parameter	Specifies that audit logging should include the parameters that were passed with the statement.	–
pgaudit.log_relation	Specifies whether session audit logging should create a separate log entry for each relation (TABLE, VIEW, and so on) referenced in a SELECT or DML statement.	–
pgaudit.log_statement_once	Specifies whether logging will include the statement text and parameters with the first log entry for a statement/substatement combination or with every entry.	–

Parameter name	Description	Default
pgaudit.role	Specifies the master role to use for object audit logging.	–
pg_bigm.enable_recheck	It specifies whether to perform Recheck which is an internal process of full text search.	on
pg_bigm.gin_key_limit	It specifies the maximum number of 2-grams of the search keyword to be used for full text search.	0
pg_bigm.last_update	It reports the last updated date of the pg_bigm module.	2013.11.22
pg_bigm.similarity_limit	It specifies the minimum threshold used by the similarity search.	0.3
pg_hint_plan.debug_print	Logs results of hint parsing.	–
pg_hint_plan.enable_hint	Force planner to use plans specified in the hint comment preceding to the query.	–
pg_hint_plan.enable_hint_table	Force planner to not get hint by using table lookups.	–
pg_hint_plan.message_level	Message level of debug messages.	–
pg_hint_plan.parse_messages	Message level of parse errors.	–
pglogical.batch_inserts	Batch inserts if possible	–
pglogical.conflict_log_level	Sets log level used for logging resolved conflicts.	–

Parameter name	Description	Default
pglogical.conflict_resolution	Sets method used for conflict resolution for resolvable conflicts.	–
pglogical.extra_connection_options	connection options to add to all peer node connections	–
pglogical.synchronous_commit	pglogical specific synchronous commit value	–
pglogical.use_spi	Use SPI instead of low-level API for applying changes	–
pg_similarity.block_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.block_threshold	Sets the threshold used by the Block similarity function.	–
pg_similarity.block_tokenizer	Sets the tokenizer for Block similarity function.	–
pg_similarity.cosine_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.cosine_threshold	Sets the threshold used by the Cosine similarity function.	–
pg_similarity.cosine_tokenizer	Sets the tokenizer for Cosine similarity function.	–
pg_similarity.dice_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.dice_threshold	Sets the threshold used by the Dice similarity measure.	–
pg_similarity.dice_tokenizer	Sets the tokenizer for Dice similarity measure.	–

Parameter name	Description	Default
pg_similarity.euclidean_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.euclidean_threshold	Sets the threshold used by the Euclidean similarity measure.	–
pg_similarity.euclidean_tokenizer	Sets the tokenizer for Euclidean similarity measure.	–
pg_similarity.hamming_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.hamming_threshold	Sets the threshold used by the Block similarity metric.	–
pg_similarity.jaccard_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.jaccard_threshold	Sets the threshold used by the Jaccard similarity measure.	–
pg_similarity.jaccard_tokenizer	Sets the tokenizer for Jaccard similarity measure.	–
pg_similarity.jaro_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.jaro_threshold	Sets the threshold used by the Jaro similarity measure.	–
pg_similarity.jarowinkler_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.jarowinkler_threshold	Sets the threshold used by the Jarowinkler similarity measure.	–

Parameter name	Description	Default
pg_similarity.levenshtein_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.levenshtein_threshold	Sets the threshold used by the Levenshtein similarity measure.	–
pg_similarity.matching_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.matching_threshold	Sets the threshold used by the Matching Coefficient similarity measure.	–
pg_similarity.matching_tokenizer	Sets the tokenizer for Matching Coefficient similarity measure.	–
pg_similarity.mongeelkan_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.mongeelkan_threshold	Sets the threshold used by the Monge-Elkan similarity measure.	–
pg_similarity.mongeelkan_tokenizer	Sets the tokenizer for Monge-Elkan similarity measure.	–
pg_similarity.nw_gap_penalty	Sets the gap penalty used by the Needleman-Wunsch similarity measure.	–
pg_similarity.nw_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.nw_threshold	Sets the threshold used by the Needleman-Wunsch similarity measure.	–
pg_similarity.overlap_is_normalized	Sets if the result value is normalized or not.	–

Parameter name	Description	Default
pg_similarity.overlap_threshold	Sets the threshold used by the Overlap Coefficient similarity measure.	–
pg_similarity.overlap_tokenizer	Sets the tokenizer for Overlap Coefficientsimilarity measure.	–
pg_similarity.qgram_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.qgram_threshold	Sets the threshold used by the Q-Gram similarity measure.	–
pg_similarity.qgram_tokenizer	Sets the tokenizer for Q-Gram measure.	–
pg_similarity.swg_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.swg_threshold	Sets the threshold used by the Smith-Waterman-Gotoh similarity measure.	–
pg_similarity.sw_is_normalized	Sets if the result value is normalized or not.	–
pg_similarity.sw_threshold	Sets the threshold used by the Smith-Waterman similarity measure.	–
pg_stat_statements.max	Sets the maximum number of statements tracked by pg_stat_statements.	–
pg_stat_statements.save	Save pg_stat_statements statistics across server shutdowns.	–
pg_stat_statements.track	Selects which statements are tracked by pg_stat_statements.	–
pg_stat_statements.track_planning	Selects whether planning duration is tracked by pg_stat_statements.	–

Parameter name	Description	Default
pg_stat_statements.track_utility	Selects whether utility commands are tracked by pg_stat_statements.	–
postgis.gdal_enabled_drivers	Enable or disable GDAL drivers used with PostGIS in Postgres 9.3.5 and above.	ENABLE_ALL
quote_all_identifiers	When generating SQL fragments, quote all identifiers.	–
random_page_cost	Sets the planners estimate of the cost of a nonsequentially fetched disk page.	–
rds.enable_memory_management	Improves memory management capabilities in Aurora PostgreSQL 12.17, 13.13, 14.10, 15.5, and higher versions that prevents stability issues and database restarts caused by insufficient free memory. For more information, see Improved memory management in Aurora PostgreSQL.	True
rds.force_admin_logging_level	See log messages for RDS admin user actions in customer databases.	–
rds.log_retention_period	Amazon RDS will delete PostgreSQL log that are older than N minutes.	4320
rds.memory_allocation_guard	Improves memory management capabilities in Aurora PostgreSQL 11.21, 12.16, 13.12, 14.9, 15.4, and older versions that prevents stability issues and database restarts caused by insufficient free memory. For more information, see Improved memory management in Aurora PostgreSQL.	False
rds.pg_stat_ramdisk_size	Size of the stats ramdisk in MB. A nonzero value will setup the ramdisk.	0

Parameter name	Description	Default
rds.rds_superuser_reserved_connections	Sets the number of connection slots reserved for rds_superusers. This parameter is only available in versions 15 and earlier. For more information, see the PostgreSQL documentation reserved connections.	2
rds.superuser_variables	List of superuser-only variables for which we elevate rds_superuser modification statements.	session_replication_role
remove_temp_files_after_crash	Remove temporary files after backend crash.	0
restart_after_crash	Reinitialize server after backend crash.	–
row_security	Enable row security.	–
search_path	Sets the schema search order for names that are not schema-qualified.	–
seq_page_cost	Sets the planners estimate of the cost of a sequentially fetched disk page.	–
session_replication_role	Sets the sessions behavior for triggers and rewrite rules.	–
shared_buffers	(8kB) Sets the number of shared memory buffers used by the server.	SUM(DBInstanceClassMemory/12038,-50003)
shared_preload_libraries	Lists shared libraries to preload into server.	pg_stat_statements
ssl_ca_file	Location of the SSL server authority file.	/rdsdbdata/rds-metadata/ca-cert.pem

Parameter name	Description	Default
ssl_cert_file	Location of the SSL server certificate file.	/rdsdbdata/rds-metadata/server-cert.pem
ssl_crl_dir	Location of the SSL certificate revocation list directory.	/rdsdbdata/rds-metadata/ssl_crl_dir/
ssl_key_file	Location of the SSL server private key file	/rdsdbdata/rds-metadata/server-key.pem
standard_conforming_strings	Causes ... strings to treat backslashes literally.	–
statement_timeout	(ms Sets the maximum allowed duration of any statement.	–
stats_temp_directory	Writes temporary statistics files to the specified directory.	/rdsdbdata/db/pg_stat_tmp
superuser_reserved_connections	Sets the number of connection slots reserved for superusers.	3
synchronize_seqscans	Enable synchronized sequential scans.	–
tcp_keepalives_count	Maximum number of TCP keepalive retransmits.	–
tcp_keepalives_idle	(s Time between issuing TCP keepalives.	–
tcp_keepalives_interval	(s Time between TCP keepalive retransmits.	–
temp_buffers	(8kB Sets the maximum number of temporary buffers used by each session.	–

Parameter name	Description	Default
temp_file_limit	Constrains the total amount disk space in kilobytes that a given PostgreSQL process can use for temporary files, excluding space used for explicit temporary tables	-1
temp_tablespaces	Sets the tablespace(s to use for temporary tables and sort files.	–
track_activities	Collects information about executing commands.	–
track_activity_query_size	Sets the size reserved for pg_stat_activity.current_query, in bytes.	4096
track_counts	Collects statistics on database activity.	–
track_functions	Collects function-level statistics on database activity.	pl
track_io_timing	Collects timing statistics on database IO activity.	1
transform_–_equals	Treats expr=– as expr IS –.	–
update_process_title	Updates the process title to show the active SQL command.	–
wal_receiver_status_interval	(s Sets the maximum interval between WAL receiver status reports to the primary.	–
work_mem	(kB Sets the maximum memory to be used for query workspaces.	–
xmlbinary	Sets how binary values are to be encoded in XML.	–

Parameter name	Description	Default
xmloption	Sets whether XML data in implicit parsing and serialization operations is to be considered as documents or content fragments.	–

Amazon Aurora PostgreSQL wait events

The following are common wait events for Aurora PostgreSQL. To learn more about wait events and tuning your Aurora PostgreSQL DB cluster, see Tuning with wait events for Aurora PostgreSQL.

Activity:ArchiverMain

The archiver process is waiting for activity.

Activity:AutoVacuumMain

The autovacuum launcher process is waiting for activity.

Activity:BgWriterHibernate

The background writer process is hibernating while waiting for activity.

Activity:BgWriterMain

The background writer process is waiting for activity.

Activity:CheckpointerMain

The checkpointer process is waiting for activity.

Activity:LogicalApplyMain

The logical replication apply process is waiting for activity.

Activity:LogicalLauncherMain

The logical replication launcher process is waiting for activity.

Activity:PgStatMain

The statistics collector process is waiting for activity.

Activity:RecoveryWalAll

A process is waiting for the write-ahead log (WAL) from a stream at recovery.

Activity:RecoveryWalStream

The startup process is waiting for the write-ahead log (WAL) to arrive during streaming recovery.

Activity:SysLoggerMain

The syslogger process is waiting for activity.

Activity:WalReceiverMain

The write-ahead log (WAL) receiver process is waiting for activity.

Activity:WalSenderMain

The write-ahead log (WAL) sender process is waiting for activity.

Activity:WalWriterMain

The write-ahead log (WAL) writer process is waiting for activity.

BufferPin:BufferPin

A process is waiting to acquire an exclusive pin on a buffer.

Client:GSSOpenServer

A process is waiting to read data from the client while establishing a Generic Security Service Application Program Interface (GSSAPI) session.

Client:ClientRead

A backend process is waiting to receive data from a PostgreSQL client. For more information, see Client:ClientRead.

Client:ClientWrite

A backend process is waiting to send more data to a PostgreSQL client. For more information, see Client:ClientWrite.

Client:LibPQWalReceiverConnect

A process is waiting in the write-ahead log (WAL) receiver to establish connection to remote server.

Client:LibPQWalReceiverReceive

A process is waiting in the write-ahead log (WAL) receiver to receive data from remote server.

Client:SSLOpenServer

A process is waiting for Secure Sockets Layer (SSL) while attempting connection.

Client:WalReceiverWaitStart

A process is waiting for startup process to send initial data for streaming replication.

Client:WalSenderWaitForWAL

A process is waiting for the write-ahead log (WAL) to be flushed in the WAL sender process.

Client:WalSenderWriteData

A process is waiting for any activity when processing replies from the write-ahead log (WAL) receiver in the WAL sender process.

CPU

A backend process is active in or is waiting for CPU. For more information, see CPU.

Extension:extension

A backend process is waiting for a condition defined by an extension or module.

IO:AuroraEnhancedLogicalWALRead

A backend process is fetching log records from the change data capture (CDC) volume.

IO:AuroraOptimizedReadsCacheRead

A process is waiting for a read from Optimized Reads tiered cache because the page isn't available in shared memory.

IO:AuroraOptimizedReadsCacheSegmentTruncate

A process is waiting for an Optimized Reads tiered cache segment file to be truncated.

IO:AuroraOptimizedReadsCacheWrite

The background writer process is waiting to write in Optimized Reads tiered cache.

IO:AuroraStorageLogAllocate

A session is allocating metadata and preparing for a transaction log write.

IO:BufFileRead

When operations require more memory than the amount defined by working memory parameters, the engine creates temporary files on disk. This wait event occurs when operations read from the temporary files. For more information, see IO:BufFileRead and IO:BufFileWrite.

IO:BufFileWrite

When operations require more memory than the amount defined by working memory parameters, the engine creates temporary files on disk. This wait event occurs when operations write to the temporary files. For more information, see IO:BufFileRead and IO:BufFileWrite.

IO:ControlFileRead

A process is waiting for a read from the `pg_control` file.

IO:ControlFileSync

A process is waiting for the `pg_control` file to reach durable storage.

IO:ControlFileSyncUpdate

A process is waiting for an update to the `pg_control` file to reach durable storage.

IO:ControlFileWrite

A process is waiting for a write to the `pg_control` file.

IO:ControlFileWriteUpdate

A process is waiting for a write to update the `pg_control` file.

IO:CopyFileRead

A process is waiting for a read during a file copy operation.

IO:CopyFileWrite

A process is waiting for a write during a file copy operation.

IO:DataFileExtend

A process is waiting for a relation data file to be extended.

IO:DataFileFlush

A process is waiting for a relation data file to reach durable storage.

IO:DataFileImmediateSync

A process is waiting for an immediate synchronization of a relation data file to durable storage.

IO:DataFilePrefetch

A process is waiting for an asynchronous prefetch from a relation data file.

IO:DataFileSync

A process is waiting for changes to a relation data file to reach durable storage.

IO:DataFileRead

A backend process tried to find a page in the shared buffers, didn't find it, and so read it from storage. For more information, see IO:DataFileRead.

IO:DataFileTruncate

A process is waiting for a relation data file to be truncated.

IO:DataFileWrite

A process is waiting for a write to a relation data file.

IO:DSMFillZeroWrite

A process is waiting to write zero bytes to a dynamic shared memory backing file.

IO:LockFileAddToDataDirRead

A process is waiting for a read while adding a line to the data directory lock file.

IO:LockFileAddToDataDirSync

A process is waiting for data to reach durable storage while adding a line to the data directory lock file.

IO:LockFileAddToDataDirWrite

A process is waiting for a write while adding a line to the data directory lock file.

IO:LockFileCreateRead

A process is waiting to read while creating the data directory lock file.

IO:LockFileCreateSync

A process is waiting for data to reach durable storage while creating the data directory lock file.

IO:LockFileCreateWrite

A process is waiting for a write while creating the data directory lock file.

IO:LockFileReCheckDataDirRead

A process is waiting for a read during recheck of the data directory lock file.

IO:LogicalRewriteCheckpointSync

A process is waiting for logical rewrite mappings to reach durable storage during a checkpoint.

IO:LogicalRewriteMappingSync

A process is waiting for mapping data to reach durable storage during a logical rewrite.

IO:LogicalRewriteMappingWrite

A process is waiting for a write of mapping data during a logical rewrite.

IO:LogicalRewriteSync

A process is waiting for logical rewrite mappings to reach durable storage.

IO:LogicalRewriteTruncate

A process is waiting for the truncation of mapping data during a logical rewrite.

IO:LogicalRewriteWrite

A process is waiting for a write of logical rewrite mappings.

IO:RelationMapRead

A process is waiting for a read of the relation map file.

IO:RelationMapSync

A process is waiting for the relation map file to reach durable storage.

IO:RelationMapWrite

A process is waiting for a write to the relation map file.

IO:ReorderBufferRead

A process is waiting for a read during reorder buffer management.

IO:ReorderBufferWrite

A process is waiting for a write during reorder buffer management.

IO:ReorderLogicalMappingRead

A process is waiting for a read of a logical mapping during reorder buffer management.

IO:ReplicationSlotRead

A process is waiting for a read from a replication slot control file.

IO:ReplicationSlotRestoreSync

A process is waiting for a replication slot control file to reach durable storage while restoring it to memory.

IO:ReplicationSlotSync

A process is waiting for a replication slot control file to reach durable storage.

IO:ReplicationSlotWrite

A process is waiting for a write to a replication slot control file.

IO:SLRUFlushSync

A process is waiting for simple least-recently used (SLRU) data to reach durable storage during a checkpoint or database shutdown.

IO:SLRURead

A process is waiting for a read of a simple least-recently used (SLRU) page.

IO:SLRUSync

A process is waiting for simple least-recently used (SLRU) data to reach durable storage following a page write.

IO:SLRUWrite

A process is waiting for a write of a simple least-recently used (SLRU) page.

IO:SnapbuildRead

A process is waiting for a read of a serialized historical catalog snapshot.

IO:SnapbuildSync

A process is waiting for a serialized historical catalog snapshot to reach durable storage.

IO:SnapbuildWrite

A process is waiting for a write of a serialized historical catalog snapshot.

IO:TimelineHistoryFileSync

A process is waiting for a timeline history file received through streaming replication to reach durable storage.

IO:TimelineHistoryFileWrite

A process is waiting for a write of a timeline history file received through streaming replication.

IO:TimelineHistoryRead

A process is waiting for a read of a timeline history file.

IO:TimelineHistorySync

A process is waiting for a newly created timeline history file to reach durable storage.

IO:TimelineHistoryWrite

A process is waiting for a write of a newly created timeline history file.

IO:TwophaseFileRead

A process is waiting for a read of a two phase state file.

IO:TwophaseFileSync

A process is waiting for a two phase state file to reach durable storage.

IO:TwophaseFileWrite

A process is waiting for a write of a two phase state file.

IO:WALBootstrapSync

A process is waiting for the write-ahead log (WAL) to reach durable storage during bootstrapping.

IO:WALBootstrapWrite

A process is waiting for a write of a write-ahead log (WAL) page during bootstrapping.

IO:WALCopyRead

A process is waiting for a read when creating a new write-ahead log (WAL) segment by copying an existing one.

IO:WALCopySync

A process is waiting for a new write-ahead log (WAL) segment created by copying an existing one to reach durable storage.

IO:WALCopyWrite

A process is waiting for a write when creating a new write-ahead log (WAL) segment by copying an existing one.

IO:WALInitSync

A process is waiting for a newly initialized write-ahead log (WAL) file to reach durable storage.

IO:WALInitWrite

A process is waiting for a write while initializing a new write-ahead log (WAL) file.

IO:WALRead

A process is waiting for a read from a write-ahead log (WAL) file.

IO:WALSenderTimelineHistoryRead

A process is waiting for a read from a timeline history file during a WAL sender timeline command.

IO:WALSync

A process is waiting for a write-ahead log (WAL) file to reach durable storage.

IO:WALSyncMethodAssign

A process is waiting for data to reach durable storage while assigning a new write-ahead log (WAL) sync method.

IO:WALWrite

A process is waiting for a write to a write-ahead log (WAL) file.

IO:XactSync

A backend process is waiting for the Aurora storage subsystem to acknowledge the commit of a regular transaction, or the commit or rollback of a prepared transaction. For more information, see IO:XactSync.

IPC:AuroraLogicalSchemaUpdate

Two backend processes are attempting to insert the same entry into the schema cache. One process will continue while the other waits for it to complete.

IPC:AuroraOptimizedReadsCacheWriteStop

A process is waiting for the background writer to stop writing into Optimized Reads tiered cache.

IPC:BackupWaitWalArchive

A process is waiting for write-ahead log (WAL) files required for a backup to be successfully archived.

IPC:BgWorkerShutdown

A process is waiting for a background worker to shut down.

IPC:BgWorkerStartup

A process is waiting for a background worker to start.

IPC:BtreePage

A process is waiting for the page number needed to continue a parallel B-tree scan to become available.

IPC:CheckpointDone

A process is waiting for a checkpoint to complete.

IPC:CheckpointStart

A process is waiting for a checkpoint to start.

IPC:ClogGroupUpdate

A process is waiting for the group leader to update the transaction status at a transaction's end.

IPC:DamRecordTxAck

A backend process has generated a database activity streams event and is waiting for the event to become durable. For more information, see IPC:DamRecordTxAck.

IPC:ExecuteGather

A process is waiting for activity from a child process while executing a Gather plan node.

IPC:Hash/Batch/Allocating

A process is waiting for an elected parallel hash participant to allocate a hash table.

IPC:Hash/Batch/Electing

A process is electing a parallel hash participant to allocate a hash table.

IPC:Hash/Batch/Loading

A process is waiting for other parallel hash participants to finish loading a hash table.

IPC:Hash/Build/Allocating

A process is waiting for an elected parallel hash participant to allocate the initial hash table.

IPC:Hash/Build/Electing

A process is electing a parallel hash participant to allocate the initial hash table.

IPC:Hash/Build/HashingInner

A process is waiting for other parallel hash participants to finish hashing the inner relation.

IPC:Hash/Build/HashingOuter

A process is waiting for other parallel hash participants to finish partitioning the outer relation.

IPC:Hash/GrowBatches/Allocating

A process is waiting for an elected parallel hash participant to allocate more batches.

IPC:Hash/GrowBatches/Deciding

A process is electing a parallel hash participant to decide on future batch growth.

IPC:Hash/GrowBatches/Electing

A process is electing a parallel hash participant to allocate more batches.

IPC:Hash/GrowBatches/Finishing

A process is waiting for an elected parallel hash participant to decide on future batch growth.

IPC:Hash/GrowBatches/Repartitioning

A process is waiting for other parallel hash participants to finishing repartitioning.

IPC:Hash/GrowBuckets/Allocating

A process is waiting for an elected parallel hash participant to finish allocating more buckets.

IPC:Hash/GrowBuckets/Electing

A process is electing a parallel hash participant to allocate more buckets.

IPC:Hash/GrowBuckets/Reinserting

A process is waiting for other parallel hash participants to finish inserting tuples into new buckets.

IPC:HashBatchAllocate

A process is waiting for an elected parallel hash participant to allocate a hash table.

IPC:HashBatchElect

A process is waiting to elect a parallel hash participant to allocate a hash table.

IPC:HashBatchLoad

A process is waiting for other parallel hash participants to finish loading a hash table.

IPC:HashBuildAllocate

A process is waiting for an elected parallel hash participant to allocate the initial hash table.

IPC:HashBuildElect

A process is waiting to elect a parallel hash participant to allocate the initial hash table.

IPC:HashBuildHashInner

A process is waiting for other parallel hash participants to finish hashing the inner relation.

IPC:'HashBuildHashOuter

A process is waiting for other parallel hash participants to finish partitioning the outer relation.

IPC:HashGrowBatchesAllocate

A process is waiting for an elected parallel hash participant to allocate more batches.

IPC:'HashGrowBatchesDecide

A process is waiting to elect a parallel hash participant to decide on future batch growth.

IPC:HashGrowBatchesElect

A process is waiting to elect a parallel hash participant to allocate more batches.

IPC:HashGrowBatchesFinish

A process is waiting for an elected parallel hash participant to decide on future batch growth.

IPC:HashGrowBatchesRepartition

A process is waiting for other parallel hash participants to finish repartitioning.

IPC:HashGrowBucketsAllocate

A process is waiting for an elected parallel hash participant to finish allocating more buckets.

IPC:HashGrowBucketsElect

A process is waiting to elect a parallel hash participant to allocate more buckets.

IPC:HashGrowBucketsReinsert

A process is waiting for other parallel hash participants to finish inserting tuples into new buckets.

IPC:LogicalSyncData

A process is waiting for a logical replication remote server to send data for initial table synchronization.

IPC:LogicalSyncStateChange

A process is waiting for a logical replication remote server to change state.

IPC:MessageQueueInternal

A process is waiting for another process to be attached to a shared message queue.

IPC:MessageQueuePutMessage

A process is waiting to write a protocol message to a shared message queue.

IPC:MessageQueueReceive

A process is waiting to receive bytes from a shared message queue.

IPC:MessageQueueSend

A process is waiting to send bytes to a shared message queue.

IPC:ParallelBitmapScan

A process is waiting for a parallel bitmap scan to become initialized.

IPC:ParallelCreateIndexScan

A process is waiting for parallel CREATE INDEX workers to finish a heap scan.

IPC:ParallelFinish

A process is waiting for parallel workers to finish computing.

IPC:ProcArrayGroupUpdate

A process is waiting for the group leader to clear the transaction ID at transaction end.

IPC:ProcSignalBarrier

A process is waiting for a barrier event to be processed by all backends.

IPC:Promote

A process is waiting for standby promotion.

IPC:RecoveryConflictSnapshot

A process is waiting for recovery conflict resolution for a vacuum cleanup.

IPC:RecoveryConflictTablespace

A process is waiting for recovery conflict resolution for dropping a tablespace.

IPC:RecoveryPause

A process is waiting for recovery to be resumed.

IPC:ReplicationOriginDrop

A process is waiting for a replication origin to become inactive so it can be dropped.

IPC:ReplicationSlotDrop

A process is waiting for a replication slot to become inactive so it can be dropped.

IPC:SafeSnapshot

A process is waiting to obtain a valid snapshot for a READ ONLY DEFERRABLE transaction.

IPC:SyncRep

A process is waiting for confirmation from a remote server during synchronous replication.

IPC:XactGroupUpdate

A process is waiting for the group leader to update the transaction status at transaction end.

Lock:advisory

A backend process requested an advisory lock and is waiting for it. For more information, see Lock:advisory.

Lock:extend

A backend process is waiting for a lock to be released so that it can extend a relation. This lock is needed because only one backend process can extend a relation at a time. For more information, see Lock:extend.

Lock:frozenid

A process is waiting to update `pg_database.datfrozenxid` and `pg_database.datminmxid`.

Lock:object

A process is waiting to get a lock on a nonrelation database object.

Lock:page

A process is waiting to get a lock on a page of a relation.

Lock:Relation

A backend process is waiting to acquire a lock on a relation that is locked by another transaction. For more information, see Lock:Relation.

Lock:spectoken

A process is waiting to get a speculative insertion lock.

Lock:speculative token

A process is waiting to acquire a speculative insertion lock.

Lock:transactionid

A transaction is waiting for a row-level lock. For more information, see Lock:transactionid.

Lock:tuple

A backend process is waiting to acquire a lock on a tuple while another backend process holds a conflicting lock on the same tuple. For more information, see Lock:tuple.

Lock:userlock

A process is waiting to get a user lock.

Lock:virtualxid

A process is waiting to get a virtual transaction ID lock.

LWLock:AddinShmemInit

A process is waiting to manage an extension's space allocation in shared memory.

LWLock:AddinShmemInitLock

A process is waiting to manage space allocation in shared memory.

LWLock:async

A process is waiting for I/O on an async (notify) buffer.

LWLock:AsyncCtlLock

A process is waiting to read or update a shared notification state.

LWLock:AsyncQueueLock

A process is waiting to read or update notification messages.

LWLock:AuroraOptimizedReadsCacheMapping

A process is waiting to associate a data block with a page in the Optimized Reads tiered cache.

LWLock:AutoFile

A process is waiting to update the `postgresql.auto.conf` file.

LWLock:AutoFileLock

A process is waiting to update the `postgresql.auto.conf` file.

LWLock:Autovacuum

A process is waiting to read or update the current state of autovacuum workers.

LWLock:AutovacuumLock

An autovacuum worker or launcher is waiting to update or read the current state of autovacuum workers.

LWLock:AutovacuumSchedule

A process is waiting to ensure that a table selected for autovacuum still needs vacuuming.

LWLock:AutovacuumScheduleLock

A process is waiting to ensure that the table it has selected for a vacuum still needs vacuuming.

LWLock:BackendRandomLock

A process is waiting to generate a random number.

LWLock:BackgroundWorker

A process is waiting to read or update background worker state.

LWLock:BackgroundWorkerLock

A process is waiting to read or update the background worker state.

LWLock:BtreeVacuum

A process is waiting to read or update vacuum-related information for a B-tree index.

LWLock:BtreeVacuumLock

A process is waiting to read or update vacuum-related information for a B-tree index.

LWLock:buffer_content

A backend process is waiting to acquire a lightweight lock on the contents of a shared memory buffer. For more information, see LWLock:buffer_content (BufferContent).

LWLock:buffer_mapping

A backend process is waiting to associate a data block with a buffer in the shared buffer pool. For more information, see LWLock:buffer_mapping.

LWLock:BufferIO

A backend process wants to read a page into shared memory. The process is waiting for other processes to finish their I/O for the page. For more information, see LWLock:BufferIO (IPC:BufferIO).

LWLock:Checkpoint

A process is waiting to begin a checkpoint.

LWLock:CheckpointLock

A process is waiting to perform checkpoint.

LWLock:CheckpointerComm

A process is waiting to manage `fsync` requests.

LWLock:CheckpointerCommLock

A process is waiting to manage `fsync` requests.

LWLock:clog

A process is waiting for I/O on a clog (transaction status) buffer.

LWLock:CLogControlLock

A process is waiting to read or update transaction status.

LWLock:CLogTruncationLock

A process is waiting to run `txid_status` or update the oldest transaction ID available to it.

LWLock:commit_timestamp

A process is waiting for I/O on a commit timestamp buffer.

LWLock:CommitTs

A process is waiting to read or update the last value set for a transaction commit timestamp.

LWLock:CommitTsBuffer

A process is waiting for I/O on a simple least-recently used (SLRU) buffer for a commit timestamp.

LWLock:CommitTsControlLock

A process is waiting to read or update transaction commit timestamps.

LWLock:CommitTsLock

A process is waiting to read or update the last value set for the transaction timestamp.

LWLock:CommitTsSLRU

A process is waiting to access the simple least-recently used (SLRU) cache for a commit timestamp.

LWLock:ControlFile

A process is waiting to read or update the `pg_control` file or create a new write-ahead log (WAL) file.

LWLock:ControlFileLock

A process is waiting to read or update the control file or creation of a new write-ahead log (WAL) file.

LWLock:DynamicSharedMemoryControl

A process is waiting to read or update dynamic shared memory allocation information.

LWLock:DynamicSharedMemoryControlLock

A process is waiting to read or update the dynamic shared memory state.

LWLock:lock_manager

A backend process is waiting to add or examine locks for backend processes. Or it's waiting to join or exit a locking group that is used by parallel query. For more information, see LWLock:lock_manager.

LWLock:LockFastPath

A process is waiting to read or update a process's fast-path lock information.

LWLock:LogicalRepWorker

A process is waiting to read or update the state of logical replication workers.

LWLock:LogicalRepWorkerLock

A process is waiting for an action on a logical replication worker to finish.

LWLock:LogicalSchemaCache

A process modified the schema cache.

LWLock:multixact_member

A process is waiting for I/O on a multixact_member buffer.

LWLock:multixact_offset

A process is waiting for I/O on a multixact offset buffer.

LWLock:MultiXactGen

A process is waiting to read or update shared multixact state.

LWLock:MultiXactGenLock

A process is waiting to read or update a shared multixact state.

LWLock:MultiXactMemberBuffer

A process is waiting for I/O on a simple least-recently used (SLRU) buffer for a multixact member. For more information, see LWLock:MultiXact.

LWLock:MultiXactMemberControlLock

A process is waiting to read or update multixact member mappings.

LWLock:MultiXactMemberSLRU

A process is waiting to access the simple least-recently used (SLRU) cache for a multixact member. For more information, see LWLock:MultiXact.

LWLock:MultiXactOffsetBuffer

A process is waiting for I/O on a simple least-recently used (SLRU) buffer for a multixact offset. For more information, see LWLock:MultiXact.

LWLock:MultiXactOffsetControlLock

A process is waiting to read or update multixact offset mappings.

LWLock:MultiXactOffsetSLRU

A process is waiting to access the simple least-recently used (SLRU) cache for a multixact offset. For more information, see LWLock:MultiXact.

LWLock:MultiXactTruncation

A process is waiting to read or truncate multixact information.

LWLock:MultiXactTruncationLock

A process is waiting to read or truncate multixact information.

LWLock:NotifyBuffer

A process is waiting for I/O on the simple least-recently used (SLRU) buffer for a NOTIFY message.

LWLock:NotifyQueue

A process is waiting to read or update NOTIFY messages.

LWLock:NotifyQueueTail

A process is waiting to update a limit on NOTIFY message storage.

LWLock:NotifyQueueTailLock

A process is waiting to update limit on notification message storage.

LWLock:NotifySLRU

A process is waiting to access the simple least-recently used (SLRU) cache for a NOTIFY message.

LWLock:OidGen

A process is waiting to allocate a new object ID (OID).

LWLock:OidGenLock

A process is waiting to allocate or assign an object ID (OID).

LWLock:oldserxid

A process is waiting for I/O on an oldserxid buffer.

LWLock:OldSerXidLock

A process is waiting to read or record conflicting serializable transactions.

LWLock:OldSnapshotTimeMap

A process is waiting to read or update old snapshot control information.

LWLock:OldSnapshotTimeMapLock

A process is waiting to read or update old snapshot control information.

LWLock:parallel_append

A process is waiting to choose the next subplan during parallel append plan execution.

LWLock:parallel_hash_join

A process is waiting to allocate or exchange a chunk of memory or update counters during a parallel hash plan execution.

LWLock:parallel_query_dsa

A process is waiting for a lock on dynamic shared memory allocation for a parallel query.

LWLock:ParallelAppend

A process is waiting to choose the next subplan during parallel append plan execution.

LWLock:ParallelHashJoin

A process is waiting to synchronize workers during plan execution for a parallel hash join.

Lwlock:ParallelQueryDSA

A process is waiting for dynamic shared memory allocation for a parallel query.

Lwlock:PerSessionDSA

A process is waiting for dynamic shared memory allocation for a parallel query.

Lwlock:PerSessionRecordType

A process is waiting to access a parallel query's information about composite types.

Lwlock:PerSessionRecordTypmod

A process is waiting to access a parallel query's information about type modifiers that identify anonymous record types.

Lwlock:PerXactPredicateList

A process is waiting to access the list of predicate locks held by the current serializable transaction during a parallel query.

Lwlock:predicate_lock_manager

A process is waiting to add or examine predicate lock information.

Lwlock:PredicateLockManager

A process is waiting to access predicate lock information used by serializable transactions.

Lwlock:proc

A process is waiting to read or update the fast-path lock information.

LWLock:ProcArray

A process is waiting to access the shared per-process data structures (typically, to get a snapshot or report a session's transaction ID).

LWLock:ProcArrayLock

A process is waiting to get a snapshot or clearing a transaction Id at a transaction's end.

LWLock:RelationMapping

A process is waiting to read or update a `pg_filenode.map` file (used to track the file-node assignments of certain system catalogs).

LWLock:RelationMappingLock

A process is waiting to update the relation map file used to store catalog-to-file-node mapping.

LWLock:RelCacheInit

A process is waiting to read or update a `pg_internal.init` file (a relation cache initialization file).

LWLock:RelCacheInitLock

A process is waiting to read or write a relation cache initialization file.

LWLock:replication_origin

A process is waiting to read or update the replication progress.

LWLock:replication_slot_io

A process is waiting for I/O on a replication slot.

LWLock:ReplicationOrigin

A process is waiting to create, drop, or use a replication origin.

LWLock:ReplicationOriginLock

A process is waiting to set up, drop, or use a replication origin.

LWLock:ReplicationOriginState

A process is waiting to read or update the progress of one replication origin.

LWLock:ReplicationSlotAllocation

A process is waiting to allocate or free a replication slot.

LWLock:ReplicationSlotAllocationLock

A process is waiting to allocate or free a replication slot.

LWLock:ReplicationSlotControl

A process is waiting to read or update a replication slot state.

LWLock:ReplicationSlotControlLock

A process is waiting to read or update the replication slot state.

LWLock:ReplicationSlotIO

A process is waiting for I/O on a replication slot.

LWLock:SerialBuffer

A process is waiting for I/O on a simple least-recently used (SLRU) buffer for a serializable transaction conflict.

LWLock:SerializableFinishedList

A process is waiting to access the list of finished serializable transactions.

LWLock:SerializableFinishedListLock

A process is waiting to access the list of finished serializable transactions.

LWLock:SerializablePredicateList

A process is waiting to access the list of predicate locks held by serializable transactions.

LWLock:SerializablePredicateLockListLock

A process is waiting to perform an operation on a list of locks held by serializable transactions.

LWLock:SerializableXactHash

A process is waiting to read or update information about serializable transactions.

LWLock:SerializableXactHashLock

A process is waiting to retrieve or store information about serializable transactions.

LWLock:SerialSLRU

A process is waiting to access the simple least-recently used (SLRU) cache for a serializable transaction conflict.

LWLock:SharedTidBitmap

A process is waiting to access a shared tuple identifier (TID) bitmap during a parallel bitmap index scan.

LWLock:SharedTupleStore

A process is waiting to access a shared tuple store during a parallel query.

LWLock:ShmemIndex

A process is waiting to find or allocate space in shared memory.

LWLock:ShmemIndexLock

A process is waiting to find or allocate space in shared memory.

LWLock:SInvalRead

A process is waiting to retrieve messages from the shared catalog invalidation queue.

LWLock:SInvalReadLock

A process is waiting to retrieve or remove messages from a shared invalidation queue.

LWLock:SInvalWrite

A process is waiting to add a message to the shared catalog invalidation queue.

LWLock:SInvalWriteLock

A process is waiting to add a message in a shared invalidation queue.

LWLock:SyncRep

A process is waiting to read or update information about the state of synchronous replication.

LWLock:SyncRepLock

A process is waiting to read or update information about synchronous replicas.

LWLock:SyncScan

A process is waiting to select the starting location of a synchronized table scan.

LWLock:SyncScanLock

A process is waiting to get the start location of a scan on a table for synchronized scans.

LWLock:TablespaceCreate

A process is waiting to create or drop a tablespace.

LWLock:TablespaceCreateLock

A process is waiting to create or drop the tablespace.

LWLock:tbm

A process is waiting for a shared iterator lock on a tree bitmap (TBM).

LWLock:TwoPhaseState

A process is waiting to read or update the state of prepared transactions.

LWLock:TwoPhaseStateLock

A process is waiting to read or update the state of prepared transactions.

LWLock:wal_insert

A process is waiting to insert the write-ahead log (WAL) into a memory buffer.

LWLock:WALBufMapping

A process is waiting to replace a page in write-ahead log (WAL) buffers.

LWLock:WALBufMappingLock

A process is waiting to replace a page in write-ahead log (WAL) buffers.

LWLock:WALInsert

A process is waiting to insert write-ahead log (WAL) data into a memory buffer.

LWLock:WALWrite

A process is waiting for write-ahead log (WAL) buffers to be written to disk.

LWLock:WALWriteLock

A process is waiting for write-ahead log (WAL) buffers to be written to disk.

LWLock:WrapLimitsVacuum

A process is waiting to update limits on transaction ID and multixact consumption.

LWLock:WrapLimitsVacuumLock

A process is waiting to update limits on transaction ID and multixact consumption.

LWLock:XactBuffer

A process is waiting for I/O on a simple least-recently used (SLRU) buffer for a transaction status.

LWLock:XactSLRU

A process is waiting to access the simple least-recently used (SLRU) cache for a transaction status.

LWLock:XactTruncation

A process is waiting to run pg_xact_status or update the oldest transaction ID available to it.

LWLock:XidGen

A process is waiting to allocate a new transaction ID.

LWLock:XidGenLock

A process is waiting to allocate or assign a transaction ID.

Timeout:BaseBackupThrottle

A process is waiting during base backup when throttling activity.

Timeout:PgSleep

A backend process has called the pg_sleep function and is waiting for the sleep timeout to expire. For more information, see Timeout:PgSleep.

Timeout:RecoveryApplyDelay

A process is waiting to apply write-ahead log (WAL) during recovery because of a delay setting.

Timeout:RecoveryRetrieveRetryInterval

A process is waiting during recovery when write-ahead log (WAL) data is not available from any source (pg_wal, archive, or stream).

Timeout:VacuumDelay

A process is waiting in a cost-based vacuum delay point.

For a complete list of PostgreSQL wait events, see The Statistics Collector > Wait Event tables in the PostgreSQL documentation.

Database engine updates for Amazon Aurora PostgreSQL

Following, you can find information about Amazon Aurora PostgreSQL engine version releases and updates. You can also find information about how to upgrade your Aurora PostgreSQL engine. For more information about Aurora releases in general, see Amazon Aurora versions.

> **Tip**
>
> You can minimize the downtime required for a DB cluster upgrade by using a blue/green deployment. For more information, see *Using Blue/Green Deployments for database updates*.

Topics

- Identifying versions of Amazon Aurora PostgreSQL
- Amazon Aurora PostgreSQL releases and engine versions
- Extension versions for Amazon Aurora PostgreSQL
- Upgrading Amazon Aurora PostgreSQL DB clusters
- Using an Aurora PostgreSQL long-term support (LTS) release

Identifying versions of Amazon Aurora PostgreSQL

Amazon Aurora includes certain features that are general to Aurora and available to all Aurora DB clusters. Aurora includes other features that are specific to a particular database engine that Aurora supports. These features are available only to those Aurora DB clusters that use that database engine, such as Aurora PostgreSQL.

An Aurora database release typically has two version numbers, the database engine version number and the Aurora version number. If an Aurora PostgreSQL release has an Aurora version number, it's included after the engine version number in the Amazon Aurora PostgreSQL releases and engine versions listing.

Topics

- Aurora version number
- PostgreSQL engine version numbers

Aurora version number

Aurora version numbers use the *major*.*minor*.*patch* naming scheme. An Aurora patch version includes important bug fixes added to a minor version after its release. To learn more about Amazon Aurora major, minor, and patch releases, see Amazon Aurora major versions, Amazon Aurora minor versions, and Amazon Aurora patch versions.

You can find out the Aurora version number of your Aurora PostgreSQL DB instance with the following SQL query:

```
postgres=> SELECT aurora_version();
```

Starting with the release of PostgreSQL versions 13.3, 12.8, 11.13, 10.18, and for all other later versions, Aurora version numbers align more closely to the PostgreSQL engine version. For example, querying an Aurora PostgreSQL 13.3 DB cluster returns the following:

```
aurora_version
----------------
 13.3.1
(1 row)
```

Prior releases, such as Aurora PostgreSQL 10.14 DB cluster, return version numbers similar to the following:

```
aurora_version
----------------
 2.7.3
(1 row)
```

PostgreSQL engine version numbers

Starting with PostgreSQL 10, PostgreSQL database engine versions use a *major*.*minor* numbering scheme for all releases. Some examples include PostgreSQL 10.18, PostgreSQL 12.7, and PostgreSQL 13.3.

Releases prior to PostgreSQL 10 used a *major*.*major*.*minor* numbering scheme in which the first two digits make up the major version number and a third digit denotes a minor version. For example, PostgreSQL 9.6 was a major version, with minor versions 9.6.21 or 9.6.22 indicated by the third digit.

> **Note**
>
> The PostgreSQL engine version 9.6 is no longer supported. To upgrade, see Upgrading Amazon Aurora PostgreSQL DB clusters. For version policies and release timelines, see How long Amazon Aurora major versions remain available.

You can find out the PostgreSQL database engine version number with the following SQL query:

```
postgres=> SELECT version();
```

For an Aurora PostgreSQL 13.3 DB cluster, the results are as follows:

```
version
-----------------------------------------------------------------------------------------------------------
 PostgreSQL 13.3 on x86_64-pc-linux-gnu, compiled by x86_64-pc-linux-gnu-gcc (GCC)
 7.4.0, 64-bit
(1 row)
```

Amazon Aurora PostgreSQL releases and engine versions

Amazon Aurora PostgreSQL-Compatible Edition releases are updated regularly. Updates are applied to Aurora PostgreSQL DB clusters during system maintenance windows. When updates are applied depends on the type of update, the Amazon Web Services Region, and maintenance window setting for the DB cluster. Many of the listed releases include both a PostgreSQL version number and an Amazon Aurora version number. However, starting with the release of PostgreSQL versions 13.3, 12.8, 11.13, 10.18, and for all other later versions, Aurora version numbers aren't used. To identify the version numbers of your Aurora PostgreSQL database, see Identifying versions of Amazon Aurora PostgreSQL.

For information about extensions and modules, see Extension versions for Amazon Aurora PostgreSQL.

> **Note**
>
> For information about Amazon Aurora version policies and release timelines, see How long Amazon Aurora major versions remain available.

For information about support for Amazon Aurora see Amazon RDS FAQs.

To determine which Aurora PostgreSQL DB engine versions are available in an Amazon Web Services Region, use the describe-db-engine-versions Amazon CLI command. For example:

```
aws rds describe-db-engine-versions --engine aurora-postgresql --query '*[].
[EngineVersion]' --output text --region aws-region
```

For a list of Amazon Web Services Regions, see Aurora PostgreSQL Region availability.

For details about the PostgreSQL versions that are available on Aurora PostgreSQL, see the *Release Notes for Aurora PostgreSQL*.

Extension versions for Amazon Aurora PostgreSQL

You can install and configure various PostgreSQL extensions for use with Aurora PostgreSQL DB clusters. For example, you can use the PostgreSQL `pg_partman` extension to automate the creation and maintenance of table partitions. To learn more about this and other extensions available for Aurora PostgreSQL, see Working with extensions and foreign data wrappers.

For details about the PostgreSQL extensions that are supported on Aurora PostgreSQL, see Extension versions for Amazon Aurora PostgreSQL in *Release Notes for Aurora PostgreSQL*.

Upgrading Amazon Aurora PostgreSQL DB clusters

Amazon Aurora makes new versions of the PostgreSQL database engine available in Amazon Web Services Regions only after extensive testing. You can upgrade your Aurora PostgreSQL DB clusters to the new version when it's available in your Region.

Depending on the version of Aurora PostgreSQL that your DB cluster is currently running, an upgrade to the new release is either a minor upgrade or a major upgrade. For example, upgrading an Aurora PostgreSQL 11.15 DB cluster to Aurora PostgreSQL 13.6 is a *major version upgrade*. Upgrading an Aurora PostgreSQL 13.3 DB cluster to Aurora PostgreSQL 13.7 is a *minor version upgrade*. In the following topics, you can find information about how to perform both types of upgrades.

Contents

- Overview of the Aurora PostgreSQL upgrade processes

- Getting a list of available versions in your Amazon Web Services Region
- Performing a major version upgrade
  - Testing an upgrade of your production DB cluster to a new major version
  - Post-upgrade recommendations
  - Upgrading the Aurora PostgreSQL engine to a new major version
    - Major upgrades for global databases
- Performing a minor version upgrade
  - Before performing a minor version upgrade
  - How to perform minor version upgrades and apply patches
  - Minor release upgrades and zero-downtime patching
  - Limitations of zero-downtime patching
  - Upgrading the Aurora PostgreSQL engine to a new minor version
- Upgrading PostgreSQL extensions
- Alternative blue/green upgrade technique

Overview of the Aurora PostgreSQL upgrade processes

The differences between major and minor version upgrades are as follows:

Minor version upgrades and patches

Minor version upgrades and patches include only those changes that are backward-compatible with existing applications. Minor version upgrades and patches become available to you only after Aurora PostgreSQL tests and approves them.

Aurora can apply minor version upgrades for you automatically. When you create a new Aurora PostgreSQL DB cluster, the **Enable minor version upgrade** option is enabled by default. Unless you manually turn off this option, Aurora periodically applies automatic minor version upgrades during your scheduled maintenance window. For more information about the automatic minor version upgrade (AmVU) option and how to modify your Aurora DB cluster to use it, see Automatic minor version upgrades for Aurora DB clusters.

If automatic minor version upgrade isn't enabled for your Aurora PostgreSQL DB cluster, your Aurora PostgreSQL isn't automatically upgraded to a new minor version. Instead, when a new minor version is released in your Amazon Web Services Region and your Aurora PostgreSQL DB

cluster is running an older minor version, Aurora prompts you to upgrade. It does so by adding a recommendation to the maintenance tasks for your cluster.

Patches aren't considered an upgrade, and they aren't applied automatically. Aurora PostgreSQL prompts you to apply any patches by adding a recommendation to maintenance tasks for your Aurora PostgreSQL DB cluster. For more information, see How to perform minor version upgrades and apply patches.

> **Note**
>
> Patches that resolve security or other critical issues are also added as maintenance tasks. However, these patches are required. Make sure to apply security patches to your Aurora PostgreSQL DB cluster when they become available in your pending maintenance tasks.
> Auto minor version upgrades are performed to the default minor version. For more information, see Automatic minor version upgrades for Aurora DB clusters.
> For clusters with Automatic Minor Version Upgrade enabled, if cluster availability is impacted by an issue that is fixed in a more recent patch, the patch will be applied during your maintenance window to resolve the issue with 2 weeks' advance notice.

The upgrade process involves the possibility of brief outages as each instance in the cluster is upgraded to the new version. However, after Aurora PostgreSQL versions 14.3.3, 13.7.3, 12.11.3, 11.16.3, 10.21.3 and other higher releases of these minor versions and newer major versions, the upgrade process uses the zero-downtime patching (ZDP) feature. This feature minimizes outages, and in most cases completely eliminates them. For more information, see Minor release upgrades and zero-downtime patching. For more information on the supported features and limitations of ZDP, see Limitations of zero-downtime patching.

Major version upgrades

Unlike for minor version upgrades and patches, Aurora PostgreSQL doesn't have an automatic major version upgrade option. New major PostgreSQL versions might contain database changes that aren't backward-compatible with existing applications. The new functionality can cause your existing applications to stop working correctly.

To prevent any issues, we strongly recommend that you follow the process outlined in Testing an upgrade of your production DB cluster to a new major version before upgrading the DB instances in your Aurora PostgreSQL DB clusters. First ensure that your applications can run

on the new version by following that procedure. Then you can manually upgrade your Aurora PostgreSQL DB cluster to the new version.

The upgrade process involves the possibility of brief outage when all the instances in the cluster are upgraded to the new version. The preliminary planning process also takes time. We recommend that you always perform upgrade tasks during your cluster's maintenance window or when operations are minimal. For more information, see Performing a major version upgrade.

> **Note**
>
> Both minor version upgrades and major version upgrades might involve brief outages. For that reason, we recommend strongly that you perform or schedule upgrades during your maintenance window or during other periods of low utilization.

Aurora PostgreSQL DB clusters occasionally require operating system updates. These updates might include a newer version of glibc library. During such updates, we recommend you to follow the guidelines as described in Collations supported in Aurora PostgreSQL .

Getting a list of available versions in your Amazon Web Services Region

You can get a list of all engine versions available as upgrade targets for your Aurora PostgreSQL DB cluster by querying your Amazon Web Services Region using the describe-db-engine-versions Amazon CLI command, as follows.

For Linux, macOS, or Unix:

```
aws rds describe-db-engine-versions \
  --engine aurora-postgresql \
  --engine-version version-number \
  --query 'DBEngineVersions[*].ValidUpgradeTarget[*].{EngineVersion:EngineVersion}' \
  --output text
```

For Windows:

```
aws rds describe-db-engine-versions ^
  --engine aurora-postgresql ^
  --engine-version version-number ^
```

```
  --query "DBEngineVersions[*].ValidUpgradeTarget[*].{EngineVersion:EngineVersion}" ^
  --output text
```

For example, to identify the valid upgrade targets for an Aurora PostgreSQL version 12.10 DB cluster, run the following Amazon CLI command:

For Linux, macOS, or Unix:

```
aws rds describe-db-engine-versions \
  --engine aurora-postgresql \
  --engine-version 12.10 \
  --query 'DBEngineVersions[*].ValidUpgradeTarget[*].{EngineVersion:EngineVersion}' \
  --output text
```

For Windows:

```
aws rds describe-db-engine-versions ^
  --engine aurora-postgresql ^
  --engine-version 12.10 ^
  --query "DBEngineVersions[*].ValidUpgradeTarget[*].{EngineVersion:EngineVersion}" ^
  --output text
```

In the following table, you can find both major and minor version upgrade targets for different Aurora PostgreSQL DB versions. To maintain compatibility, not all versions are offered as upgrade targets. Aurora PostgreSQL introduces new features and bug fixes with each quarterly minor version release. For information about Aurora PostgreSQL minor releases, see the *Release Notes for Aurora PostgreSQL*.

An asterisk (*) on the version number means that the version is no longer supported. For the current support status of each version, see Release calendars for Aurora PostgreSQL. If your current version is unsupported, we recommend that you upgrade to the newest minor version upgrade target or to one of the other available upgrade targets for that version.

When several versions share a row, the table lists only the upgrade targets that are valid for every version in that row. Individual versions might have additional upgrade targets. To see the full list for your version, run the preceding Amazon CLI command.

Current source version	Upgrade targets
18.6	None

Current source version	Upgrade targets
18.4	18.6
18.3	18.6, 18.4
17.11	18.6
17.10	18.6, 18.4 17.11
17.9	18.6, 18.4, 18.3 17.11, 17.10
17.7	18.6, 18.4, 18.3 17.11, 17.10, 17.9
17.6	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7
17.5	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6
17.4	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5
16.15	18.6 17.11
16.14	18.6, 18.4 17.11, 17.10 16.15

Current source version	Upgrade targets
16.13	18.6, 18.4, 18.3 17.11, 17.10, 17.9 16.15, 16.14
16.11	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7 16.15, 16.14, 16.13
16.10	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6 16.15, 16.14, 16.13, 16.11
16.9	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5 16.15, 16.14, 16.13, 16.11, 16.10
16.8	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9
16.6*, 16.4*, 16.3*, 16.2*, 16.1*	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8
15.19	18.6 17.11 16.15

Current source version	Upgrade targets
15.18	18.6, 18.4 17.11, 17.10 16.15, 16.14 15.19
15.17	18.6, 18.4, 18.3 17.11, 17.10, 17.9 16.15, 16.14, 16.13 15.19, 15.18
15.15	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7 16.15, 16.14, 16.13, 16.11 15.19, 15.18, 15.17
15.14	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6 16.15, 16.14, 16.13, 16.11, 16.10 15.19, 15.18, 15.17, 15.15
15.13	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5 16.15, 16.14, 16.13, 16.11, 16.10, 16.9 15.19, 15.18, 15.17, 15.15, 15.14

Current source version	Upgrade targets
15.12	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13
15.10	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12
15.8*, 15.7*, 15.6*, 15.5*, 15.4*, 15.3*, 15.2*	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12, 15.10
14.24	18.6 17.11 16.15 15.19
14.23	18.6, 18.4 17.11, 17.10 16.15, 16.14 15.19, 15.18 14.24

Current source version	Upgrade targets
14.22	18.6, 18.4, 18.3 17.11, 17.10, 17.9 16.15, 16.14, 16.13 15.19, 15.18, 15.17 14.24, 14.23
14.20	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7 16.15, 16.14, 16.13, 16.11 15.19, 15.18, 15.17, 15.15 14.24, 14.23, 14.22
14.19	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6 16.15, 16.14, 16.13, 16.11, 16.10 15.19, 15.18, 15.17, 15.15, 15.14 14.24, 14.23, 14.22, 14.20
14.18	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5 16.15, 16.14, 16.13, 16.11, 16.10, 16.9 15.19, 15.18, 15.17, 15.15, 15.14, 15.13 14.24, 14.23, 14.22, 14.20, 14.19

Current source version	Upgrade targets
14.17	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12 14.24, 14.23, 14.22, 14.20, 14.19, 14.18
14.6	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12, 15.10 14.24, 14.23, 14.22, 14.20, 14.19, 14.18, 14.17
14.15*, 14.13*, 14.12*, 14.11*, 14.10*, 14.9*, 14.8*, 14.7*, 14.5*, 14.4*, 14.3*	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12, 15.10 14.24, 14.23, 14.22, 14.20, 14.19, 14.18, 14.17
13.23	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7 16.15, 16.14, 16.13, 16.11 15.19, 15.18, 15.17, 15.15 14.24, 14.23, 14.22, 14.20

Current source version	Upgrade targets
13.9	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12, 15.10 14.24, 14.23, 14.22, 14.20, 14.19, 14.18, 14.17, 14.6 13.23
13.22*, 13.21*, 13.20*, 13.18*, 13.16*, 13.15*, 13.14*, 13.13*, 13.12*, 13.11*, 13.10*, 13.8*, 13.7*, 13.6*, 13.5*, 13.4*, 13.3*	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6 16.15, 16.14, 16.13, 16.11, 16.10 15.19, 15.18, 15.17, 15.15, 15.14 14.24, 14.23, 14.22, 14.20, 14.19 13.23
12.22	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12, 15.10 14.24, 14.23, 14.22, 14.20, 14.19, 14.18, 14.17 13.23

Current source version	Upgrade targets
12.9	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12, 15.10 14.24, 14.23, 14.22, 14.20, 14.19, 14.18, 14.17, 14.6 13.23, 13.9 12.22
12.20*, 12.19*, 12.18*, 12.17*, 12.16*, 12.15*, 12.14*, 12.13*, 12.12*, 12.11*, 12.10*, 12.8*, 12.7*, 12.4*	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12, 15.10 14.24, 14.23, 14.22, 14.20, 14.19, 14.18, 14.17 13.23 12.22
11.21	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12, 15.10 14.24, 14.23, 14.22, 14.20, 14.19, 14.18, 14.17 13.23 12.22

Current source version	Upgrade targets
11.9	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6, 17.5, 17.4 16.15, 16.14, 16.13, 16.11, 16.10, 16.9, 16.8 15.19, 15.18, 15.17, 15.15, 15.14, 15.13, 15.12, 15.10 14.24, 14.23, 14.22, 14.20, 14.19, 14.18, 14.17, 14.6 13.23, 13.9 12.22, 12.9 11.21
11.20*, 11.19*, 11.18*, 11.17*, 11.16*, 11.15*, 11.14*, 11.13*, 11.12*	18.6, 18.4, 18.3 17.11, 17.10, 17.9, 17.7, 17.6 16.15, 16.14, 16.13, 16.11, 16.10 15.19, 15.18, 15.17, 15.15, 15.14, 15.10 14.24, 14.23, 14.22, 14.20, 14.19 13.23 12.22 11.21

* This version is no longer supported.

For any version that you're considering, always check the availability of your cluster's DB instance class. For example, `db.r4` isn't supported for Aurora PostgreSQL 13. If your Aurora PostgreSQL DB cluster currently uses a db.r4 instance class, you need to modify it to use a supported DB instance class before you can upgrade to Aurora PostgreSQL 13. For more information about the available

Aurora PostgreSQL DB instance classes, including which ones are Graviton2-based and which ones are Intel-based, see Amazon AuroraDB instance classes.

Performing a major version upgrade

Major version upgrades might contain database changes that are not backward-compatible with previous versions of the database. New functionality in a new version can cause your existing applications to stop working correctly. To avoid issues, Amazon Aurora doesn't apply major version upgrades automatically. Rather, we recommend that you carefully plan for a major version upgrade by following these steps:

1. Choose the major version that you want from the list of available targets from those listed for your version in the table. You can get a precise list of versions available in your Amazon Web Services Region for your current version by using the Amazon CLI. For details, see Getting a list of available versions in your Amazon Web Services Region.
2. Verify that your applications work as expected on a trial deployment of the new version. For information about the complete process, see Testing an upgrade of your production DB cluster to a new major version.
3. After verifying that your applications work as expected on the trial deployment, you can upgrade your cluster. For details, see Upgrading the Aurora PostgreSQL engine to a new major version.

> **Note**
>
> You can perform a major version upgrade from Babelfish for Aurora PostgreSQL 13-based versions starting from 13.6 to Aurora PostgreSQL 14-based versions starting from 14.6. Babelfish for Aurora PostgreSQL 13.4 and 13.5 don't support major version upgrade.

You can get a list of engine versions available as major version upgrade targets for your Aurora PostgreSQL DB cluster by querying your Amazon Web Services Region using the describe-db-engine-versions Amazon CLI command, as follows.

For Linux, macOS, or Unix:

```
aws rds describe-db-engine-versions \
  --engine aurora-postgresql \
```

```
  --engine-version version-number \
  --query 'DBEngineVersions[].ValidUpgradeTarget[?IsMajorVersionUpgrade == `true`].
{EngineVersion:EngineVersion}' \
  --output text
```

For Windows:

```
aws rds describe-db-engine-versions ^
  --engine aurora-postgresql ^
  --engine-version version-number ^
  --query "DBEngineVersions[].ValidUpgradeTarget[?IsMajorVersionUpgrade == `true`].
{EngineVersion:EngineVersion}" ^
  --output text
```

In some cases, the version that you want to upgrade to isn't a target for your current version. In such cases, use the information in the versions table to perform minor version upgrades until your cluster is at a version that has your chosen target in its row of targets.

Testing an upgrade of your production DB cluster to a new major version

Each new major version includes enhancements to the query optimizer that are designed to improve performance. However, your workload might include queries that result in a worse performing plan in the new version. That's why we recommend that you test and review performance before upgrading in production. You can manage query plan stability across versions by using the Query Plan Management (QPM) extension, as detailed in Ensuring plan stability after a major version upgrade.

Before upgrading your production Aurora PostgreSQL DB clusters to a new major version, we strongly recommend that you test the upgrade to verify that all your applications work correctly:

1. Have a version-compatible parameter group ready.

   If you are using a custom DB instance or DB cluster parameter group, you can choose from two options:

   a. Specify the default DB instance, DB cluster parameter group, or both for the new DB engine version.

   b. Create your own custom parameter group for the new DB engine version.

2. Check for invalid databases and drop any that exist.

The `datconnlimit` column in the `pg_database` catalog includes a value of `-2` to mark as invalid any databases that were interrupted during a `DROP DATABASE` operation. Use the following query to check whether invalid databases exist.

```
SELECT
    datname
FROM
    pg_database
WHERE
    datconnlimit = - 2;
```

If the query returns database names, these databases are invalid. Use the `DROP DATABASE invalid_db_name` statement to drop invalid databases. You can use the following dynamic statement to drop all invalid databases.

```
SELECT
    'DROP DATABASE ' || quote_ident(datname) || ';'
FROM
    pg_database
WHERE
    datconnlimit = -2 \gexec
```

3. Check for unsupported usage:

- Commit or roll back all open prepared transactions before attempting an upgrade. You can use the following query to verify that there are no open prepared transactions on your instance.

  ```
  SELECT count(*) FROM pg_catalog.pg_prepared_xacts;
  ```

- Remove all uses of the *reg** data types before attempting an upgrade. Except for `regtype` and `regclass`, you can't upgrade the *reg** data types. The pg_upgrade utility (used by Amazon Aurora to do the upgrade) can't persist this data type. To learn more about this utility, see pg_upgrade in the PostgreSQL documentation.

  To verify that there are no uses of unsupported *reg** data types, use the following query for each database.

  ```
  SELECT count(*) FROM pg_catalog.pg_class c, pg_catalog.pg_namespace n,
   pg_catalog.pg_attribute a
  ```

```
 WHERE c.oid = a.attrelid
     AND NOT a.attisdropped
     AND a.atttypid IN ('pg_catalog.regproc'::pg_catalog.regtype,
                        'pg_catalog.regprocedure'::pg_catalog.regtype,
                        'pg_catalog.regoper'::pg_catalog.regtype,
                        'pg_catalog.regoperator'::pg_catalog.regtype,
                        'pg_catalog.regconfig'::pg_catalog.regtype,
                        'pg_catalog.regdictionary'::pg_catalog.regtype)
     AND c.relnamespace = n.oid
     AND n.nspname NOT IN ('pg_catalog', 'information_schema');
```

- Remove all uses of the *abstime*, *reltime*, and *tinterval* data types before attempting an upgrade. These data types were removed in PostgreSQL 12. If you are upgrading to version 12 or later from an earlier version, remove all uses of these types first. To find columns that use them (including columns whose type is a domain, array, composite, or range over these types), use the following query for each database.

```
WITH RECURSIVE oids AS (
    SELECT 'pg_catalog.abstime'::pg_catalog.regtype AS oid
    UNION ALL SELECT 'pg_catalog.reltime'::pg_catalog.regtype
    UNION ALL SELECT 'pg_catalog.tinterval'::pg_catalog.regtype
    UNION ALL
    SELECT * FROM (
        WITH x AS (SELECT oid FROM oids)
        SELECT t.oid FROM pg_catalog.pg_type t, x WHERE typbasetype = x.oid AND
 typtype = 'd'
        UNION ALL
        SELECT t.oid FROM pg_catalog.pg_type t, x WHERE typelem = x.oid AND typtype
 = 'b'
        UNION ALL
        SELECT t.oid FROM pg_catalog.pg_type t, pg_catalog.pg_class c,
 pg_catalog.pg_attribute a, x
        WHERE t.typtype = 'c' AND t.oid = c.reltype AND c.oid = a.attrelid
          AND NOT a.attisdropped AND a.atttypid = x.oid
        UNION ALL
        SELECT t.oid FROM pg_catalog.pg_type t, pg_catalog.pg_range r, x
        WHERE t.typtype = 'r' AND r.rngtypid = t.oid AND r.rngsubtype = x.oid
    ) foo
)
SELECT n.nspname AS schema_name,
       c.relname AS table_name,
       a.attname AS column_name,
       format_type(a.atttypid, a.atttypmod) AS data_type
```

```
FROM pg_catalog.pg_class c, pg_catalog.pg_namespace n, pg_catalog.pg_attribute a
WHERE c.oid = a.attrelid
  AND NOT a.attisdropped
  AND a.atttypid IN (SELECT oid FROM oids)
  AND c.relkind IN ('r', 'm', 'i')
  AND c.relnamespace = n.oid
  AND n.nspname !~ '^pg_temp_'
  AND n.nspname !~ '^pg_toast_temp_'
  AND n.nspname NOT IN ('pg_catalog', 'information_schema');
```

- Remove all uses of the *sql_identifier* data type (in columns or indexes) before attempting an upgrade. The on-disk format of this data type changed in PostgreSQL 12. If you are upgrading to version 12 or later from an earlier version, remove all uses first. To find columns that use it (including columns whose type is a domain, array, composite, or range over this type), use the following query for each database.

```
WITH RECURSIVE oids AS (
    SELECT 'information_schema.sql_identifier'::pg_catalog.regtype AS oid
    UNION ALL
    SELECT * FROM (
        WITH x AS (SELECT oid FROM oids)
        SELECT t.oid FROM pg_catalog.pg_type t, x WHERE typbasetype = x.oid AND
 typtype = 'd'
        UNION ALL
        SELECT t.oid FROM pg_catalog.pg_type t, x WHERE typelem = x.oid AND typtype
 = 'b'
        UNION ALL
        SELECT t.oid FROM pg_catalog.pg_type t, pg_catalog.pg_class c,
 pg_catalog.pg_attribute a, x
        WHERE t.typtype = 'c' AND t.oid = c.reltype AND c.oid = a.attrelid
          AND NOT a.attisdropped AND a.atttypid = x.oid
        UNION ALL
        SELECT t.oid FROM pg_catalog.pg_type t, pg_catalog.pg_range r, x
        WHERE t.typtype = 'r' AND r.rngtypid = t.oid AND r.rngsubtype = x.oid
    ) foo
)
SELECT n.nspname AS schema_name,
       c.relname AS table_name,
       a.attname AS column_name,
       format_type(a.atttypid, a.atttypmod) AS data_type
FROM pg_catalog.pg_class c, pg_catalog.pg_namespace n, pg_catalog.pg_attribute a
WHERE c.oid = a.attrelid
  AND NOT a.attisdropped
```

```
  AND a.atttypid IN (SELECT oid FROM oids)
  AND c.relkind IN ('r', 'm', 'i')
  AND c.relnamespace = n.oid
  AND n.nspname !~ '^pg_temp_'
  AND n.nspname !~ '^pg_toast_temp_'
  AND n.nspname NOT IN ('pg_catalog', 'information_schema');
```

- Remove all uses of the *aclitem* data type before attempting an upgrade. The internal format of this data type changed in PostgreSQL 16. If you are upgrading to version 16 or later from an earlier version, remove all uses first. To find columns that use it (including columns whose type is a domain, array, composite, or range over this type), use the following query for each database.

```
WITH RECURSIVE oids AS (
    SELECT 'pg_catalog.aclitem'::pg_catalog.regtype AS oid
    UNION ALL
    SELECT * FROM (
        WITH x AS (SELECT oid FROM oids)
        SELECT t.oid FROM pg_catalog.pg_type t, x WHERE typbasetype = x.oid AND
 typtype = 'd'
        UNION ALL
        SELECT t.oid FROM pg_catalog.pg_type t, x WHERE typelem = x.oid AND typtype
 = 'b'
        UNION ALL
        SELECT t.oid FROM pg_catalog.pg_type t, pg_catalog.pg_class c,
 pg_catalog.pg_attribute a, x
        WHERE t.typtype = 'c' AND t.oid = c.reltype AND c.oid = a.attrelid
          AND NOT a.attisdropped AND a.atttypid = x.oid
        UNION ALL
        SELECT t.oid FROM pg_catalog.pg_type t, pg_catalog.pg_range r, x
        WHERE t.typtype = 'r' AND r.rngtypid = t.oid AND r.rngsubtype = x.oid
    ) foo
)
SELECT n.nspname AS schema_name,
       c.relname AS table_name,
       a.attname AS column_name,
       format_type(a.atttypid, a.atttypmod) AS data_type
FROM pg_catalog.pg_class c, pg_catalog.pg_namespace n, pg_catalog.pg_attribute a
WHERE c.oid = a.attrelid
  AND NOT a.attisdropped
  AND a.atttypid IN (SELECT oid FROM oids)
  AND c.relkind IN ('r', 'm', 'i')
  AND c.relnamespace = n.oid
```

```
  AND n.nspname !~ '^pg_temp_'
  AND n.nspname !~ '^pg_toast_temp_'
  AND n.nspname NOT IN ('pg_catalog', 'information_schema');
```

- If you are upgrading an Aurora PostgreSQL version 10.18 or higher DB cluster that has the `pgRouting` extension installed, drop the extension before upgrading to version 12.4 or higher.

  If you are upgrading an Aurora PostgreSQL 10.x version that has the extension `pg_repack` version 1.4.3 installed, drop the extension before upgrading to any higher version.

4. Check for template1 and template0 databases.

   For a successful upgrade, template 1 and template 0 databases must exist and should be listed as a template. To check on this, use the following command:

```
SELECT datname, datistemplate FROM pg_database;

datname    | datistemplate
-----------+---------------
template0  | t
rdsadmin   | f
template1  | t
postgres   | f
```

   In the command output, the `datistemplate` value for template1 and template0 databases should be `t`.

5. Handle logical replication slots.

   For source versions earlier than 17, the upgrade process can't proceed if the Aurora PostgreSQL DB cluster is using any logical replication slots. Logical replication slots are typically used for short-term data migration tasks, such as migrating data using Amazon DMS or for replicating tables from the database to data lakes, BI tools, or other targets. Before upgrading, make sure that you know the purpose of any logical replication slots that exist, and confirm that it's okay to delete them. You can check for logical replication slots using the following query:

```
SELECT * FROM pg_replication_slots;
```

If logical replication slots are still being used, you shouldn't delete them, and you can't proceed with the upgrade. However, if the logical replication slots aren't needed, you can delete them using the following SQL:

```
SELECT pg_drop_replication_slot(slot_name);
```

For source version 17 and later, logical replication slots can be retained through the upgrade. Before you start the upgrade, disable the subscriptions and make sure that all transactions and logical decoding messages have been consumed from each slot. If a slot still holds unconsumed changes, the upgrade fails after the DB cluster has been taken offline, and the DB cluster returns to the source version. The DB cluster parameter group for the target version must set `rds.logical_replication` to 1. For more information, see Upgrade on the PostgreSQL website.

Logical replication scenarios that use the `pglogical` extension follow the same rules for the publisher node. However, you can restart the replication process from the subscriber node after the upgrade. For more information, see Reestablishing logical replication after a major upgrade.

6. Perform a backup.

   The upgrade process creates a DB cluster snapshot of your DB cluster during upgrading. If you also want to do a manual backup before the upgrade process, see Creating a DB cluster snapshot for more information.

7. Upgrade certain extensions to the latest available version before performing the major version upgrade. The extensions to update include the following:

   - `pgRouting`
   - `postgis_raster`
   - `postgis_tiger_geocoder`
   - `postgis_topology`
   - `address_standardizer`
   - `address_standardizer_data_us`

   Run the following command for each extension that's currently installed.

   ```
   ALTER EXTENSION PostgreSQL-extension UPDATE TO 'new-version';
   ```

For more information, see Upgrading PostgreSQL extensions. To learn more about upgrading PostGIS, see Step 6: Upgrade the PostGIS extension.

8. If you're upgrading to version 11.x, drop the extensions that it doesn't support before performing the major version upgrade. The extensions to drop include:
   - `chkpass`
   - `tsearch2`
9. Drop unknown data types, depending on your target version.

   PostgreSQL version 10 doesn't support the unknown data type. If a version 9.6 database uses the unknown data type, an upgrade to version 10 shows an error message such as the following.

   ```
   Database instance is in a state that cannot be upgraded: PreUpgrade checks failed:
   The instance could not be upgraded because the 'unknown' data type is used in user
    tables.
   Please remove all usages of the 'unknown' data type and try again."
   ```

   To find the unknown data type in your database so that you can remove such columns or change them to supported data types, use the following SQL code for each database.

   ```
   SELECT n.nspname, c.relname, a.attname
       FROM pg_catalog.pg_class c,
       pg_catalog.pg_namespace n,
       pg_catalog.pg_attribute a
       WHERE c.oid = a.attrelid AND NOT a.attisdropped AND
       a.atttypid = 'pg_catalog.unknown'::pg_catalog.regtype AND
       c.relkind IN ('r','m','c') AND
       c.relnamespace = n.oid AND
       n.nspname !~ '^pg_temp_' AND
       n.nspname !~ '^pg_toast_temp_' AND n.nspname NOT IN ('pg_catalog',
    'information_schema');
   ```

10. Perform a dry-run upgrade.

    We highly recommend testing a major version upgrade on a duplicate of your production database before trying the upgrade on your production database. You can monitor the execution plans on the duplicate test instance for any possible execution plan regressions and to evaluate its performance. To create a duplicate test instance, you can either restore your database from a

recent snapshot or clone your database. For more information, see Restoring from a snapshot or Cloning a volume for an Amazon Aurora DB cluster.

For more information, see Upgrading the Aurora PostgreSQL engine to a new major version.

11. Upgrade your production instance.

When your dry-run major version upgrade is successful, you should be able to upgrade your production database with confidence. For more information, see Upgrading the Aurora PostgreSQL engine to a new major version.

> **Note**
>
> During the upgrade process, Aurora PostgreSQL takes a DB cluster snapshot. You can't do a point-in-time restore of your cluster during this process. Later, you can perform a point-in-time restore to times before the upgrade began and after the automatic snapshot of your instance has completed. However, you can't perform a point-in-time restore to a previous minor version.

For information about an upgrade in progress, you can use Amazon RDS to view two logs that the pg_upgrade utility produces. These are `pg_upgrade_internal.log` and `pg_upgrade_server.log`. Amazon Aurora appends a timestamp to the file name for these logs. You can view these logs as you can any other log. For more information, see Monitoring Amazon Aurora log files.

12. Upgrade PostgreSQL extensions. The PostgreSQL upgrade process doesn't upgrade any PostgreSQL extensions. For more information, see Upgrading PostgreSQL extensions.

Post-upgrade recommendations

After you complete a major version upgrade, we recommend the following:

- Run the ANALYZE operation to refresh the `pg_statistic` table. You should do this for every database on all your PostgreSQL DB instances. Optimizer statistics aren't transferred during a major version upgrade, so you need to regenerate all statistics to avoid performance issues. Run the command without any parameters to generate statistics for all regular tables in the current database, as follows:

```
ANALYZE VERBOSE;
```

The VERBOSE flag is optional, but using it shows you the progress. For more information, see ANALYZE in the PostgreSQL documentation.

When analyzing specific tables instead of using ANALYZE VERBOSE, run the ANALYZE command for each table as follows:

```
ANALYZE table_name;
```

For partitioned tables, always analyze the parent table. This process:

- Automatically samples rows across all partitions
- Updates statistics for each partition recursively
- Maintains essential planning statistics at the parent level

While parent tables store no actual data, analyzing them is vital for query optimization. Running ANALYZE only on individual partitions can lead to poor query performance since the optimizer won't have the comprehensive statistics needed for efficient cross-partition planning.

> **Note**
>
> Run ANALYZE on your system after the upgrade to avoid performance issues.

- If you upgraded to PostgreSQL version 10, run REINDEX on any hash indexes you have. Hash indexes were changed in version 10 and must be rebuilt. To locate invalid hash indexes, run the following SQL for each database that contains hash indexes.

```
SELECT idx.indrelid::regclass AS table_name,
   idx.indexrelid::regclass AS index_name
FROM pg_catalog.pg_index idx
   JOIN pg_catalog.pg_class cls ON cls.oid = idx.indexrelid
   JOIN pg_catalog.pg_am am ON am.oid = cls.relam
WHERE am.amname = 'hash'
AND NOT idx.indisvalid;
```

- We recommend that you test your application on the upgraded database with a similar workload to verify that everything works as expected. After the upgrade is verified, you can delete this test instance.

Upgrading the Aurora PostgreSQL engine to a new major version

When you initiate the upgrade process to a new major version, Aurora PostgreSQL takes a snapshot of the Aurora DB cluster before it makes any changes to your cluster. This snapshot is created for major version upgrades only, not minor version upgrades. When the upgrade process completes, you can find this snapshot among the manual snapshots listed under **Snapshots** in the RDS console. The snapshot name includes `preupgrade` as its prefix, the name of your Aurora PostgreSQL DB cluster, the source version, the target version, and the date and timestamp, as shown in the following example.

```
preupgrade-docs-lab-apg-global-db-12-8-to-13-6-2022-05-19-00-19
```

After the upgrade completes, you can use the snapshot that Aurora created and stored in your manual snapshot list to restore the DB cluster to its previous version, if necessary.

> **Tip**
>
> In general, snapshots provide many ways to restore your Aurora DB cluster to various points in time. To learn more, see Restoring from a DB cluster snapshot and Restoring a DB cluster to a specified time. However, Aurora PostgreSQL doesn't support using a snapshot to restore to a previous minor version.

During the major version upgrade process, Aurora allocates a volume and clones the source Aurora PostgreSQL DB cluster. If the upgrade fails for any reason, Aurora PostgreSQL uses the clone to roll back the upgrade. After more than 15 clones of a source volume are allocated, subsequent clones become full copies and take longer. This can cause the upgrade process also to take longer. If Aurora PostgreSQL rolls back the upgrade, be aware of the following:

- You might see billing entries and metrics for both the original volume and the cloned volume allocated during the upgrade. Aurora PostgreSQL cleans up the extra volume after the cluster backup retention window is beyond the time of the upgrade.
- The next cross-Region snapshot copy from this cluster will be a full copy instead of an incremental copy.

To safely upgrade the DB instances that make up your cluster, Aurora PostgreSQL uses the pg_upgrade utility. After the writer upgrade completes, each reader instance experiences a brief

outage while it's upgraded to the new major version. To learn more about this PostgreSQL utility, see pg_upgrade in the PostgreSQL documentation.

You can upgrade your Aurora PostgreSQL DB cluster to a new version by using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To upgrade the engine version of a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB cluster that you want to upgrade.
3. Choose **Modify**. The **Modify DB cluster** page appears.
4. For **Engine version**, choose the new version.
5. Choose **Continue** and check the summary of modifications.
6. To apply the changes immediately, choose **Apply immediately**. Choosing this option can cause an outage in some cases. For more information, see Modifying an Amazon Aurora DB cluster.
7. On the confirmation page, review your changes. If they are correct, choose **Modify Cluster** to save your changes.

   Or choose **Back** to edit your changes or **Cancel** to cancel your changes.

Amazon CLI

To upgrade the engine version of a DB cluster, use the modify-db-cluster Amazon CLI command. Specify the following parameters:

- `--db-cluster-identifier` – The name of the DB cluster.
- `--engine-version` – The version number of the database engine to upgrade to. For information about valid engine versions, use the Amazon CLI describe-db-engine-versions command.
- `--allow-major-version-upgrade` – A required flag when the `--engine-version` parameter is a different major version than the DB cluster's current major version.
- `--no-apply-immediately` – Apply changes during the next maintenance window. To apply changes immediately, use `--apply-immediately`.

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbcluster \
    --engine-version new_version \
    --allow-major-version-upgrade \
    --no-apply-immediately
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --engine-version new_version ^
    --allow-major-version-upgrade ^
    --no-apply-immediately
```

RDS API

To upgrade the engine version of a DB cluster, use the ModifyDBCluster operation. Specify the following parameters:

- `DBClusterIdentifier` – The name of the DB cluster, for example *`mydbcluster`*.
- `EngineVersion` – The version number of the database engine to upgrade to. For information about valid engine versions, use the DescribeDBEngineVersions operation.
- `AllowMajorVersionUpgrade` – A required flag when the `EngineVersion` parameter is a different major version than the DB cluster's current major version.
- `ApplyImmediately` – Whether to apply changes immediately or during the next maintenance window. To apply changes immediately, set the value to `true`. To apply changes during the next maintenance window, set the value to `false`.


Major upgrades for global databases

For an Aurora global database cluster, the upgrade process upgrades all DB clusters that make up your Aurora global database at the same time. It does so to ensure that each runs the same Aurora PostgreSQL version. It also ensures that any changes to system tables, data file formats, and so on, are automatically replicated to all secondary clusters.

To upgrade a global database cluster to a new major version of Aurora PostgreSQL, we recommend that you test your applications on the upgraded version, as detailed in Testing an upgrade of your production DB cluster to a new major version. Be sure to prepare your DB cluster parameter group and DB parameter group settings for each Amazon Web Services Region in your Aurora global database before the upgrade as detailed in step 1. of Testing an upgrade of your production DB cluster to a new major version.


If your Aurora PostgreSQL global database cluster has a recovery point objective (RPO) set for its `rds.global_db_rpo` parameter, make sure to reset the parameter before upgrading. The major version upgrade process doesn't work if the RPO is turned on. By default, this parameter is turned off. For more information about Aurora PostgreSQL global databases and RPO, see Managing RPOs for Aurora PostgreSQL–based global databases.

If you verify that your applications can run as expected on the trial deployment of the new version, you can start the upgrade process. To do so, see Upgrading the Aurora PostgreSQL engine to a new major version. Be sure to choose the top-level item from the **Databases** list in the RDS console, **Global database**, as shown in the following image.

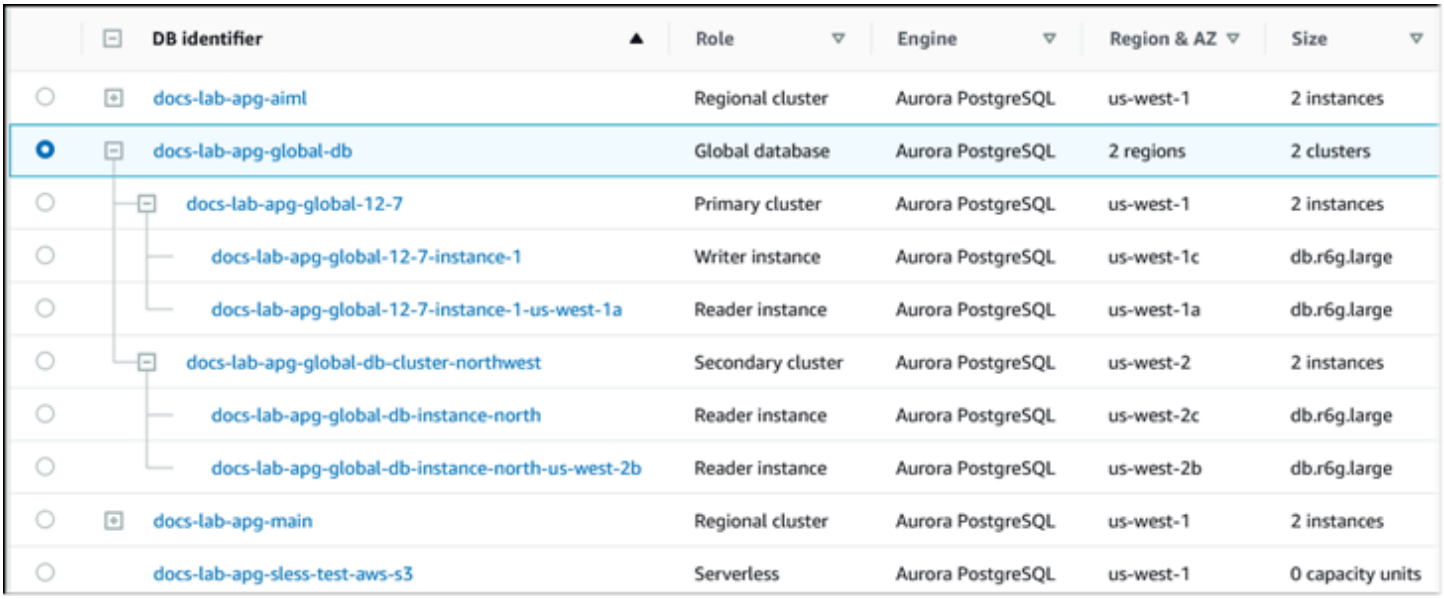

DB identifier	Role	Engine	Region & AZ	Size
docs-lab-apg-aiml	Regional cluster	Aurora PostgreSQL	us-west-1	2 instances
docs-lab-apg-global-db	Global database	Aurora PostgreSQL	2 regions	2 clusters
docs-lab-apg-global-12-7	Primary cluster	Aurora PostgreSQL	us-west-1	2 instances
docs-lab-apg-global-12-7-instance-1	Writer instance	Aurora PostgreSQL	us-west-1c	db.r6g.large
docs-lab-apg-global-12-7-instance-1-us-west-1a	Reader instance	Aurora PostgreSQL	us-west-1a	db.r6g.large
docs-lab-apg-global-db-cluster-northwest	Secondary cluster	Aurora PostgreSQL	us-west-2	2 instances
docs-lab-apg-global-db-instance-north	Reader instance	Aurora PostgreSQL	us-west-2c	db.r6g.large
docs-lab-apg-global-db-instance-north-us-west-2b	Reader instance	Aurora PostgreSQL	us-west-2b	db.r6g.large
docs-lab-apg-main	Regional cluster	Aurora PostgreSQL	us-west-1	2 instances
docs-lab-apg-sless-test-aws-s3	Serverless	Aurora PostgreSQL	us-west-1	0 capacity units

As with any modification, you can confirm that you want the process to proceed when prompted.

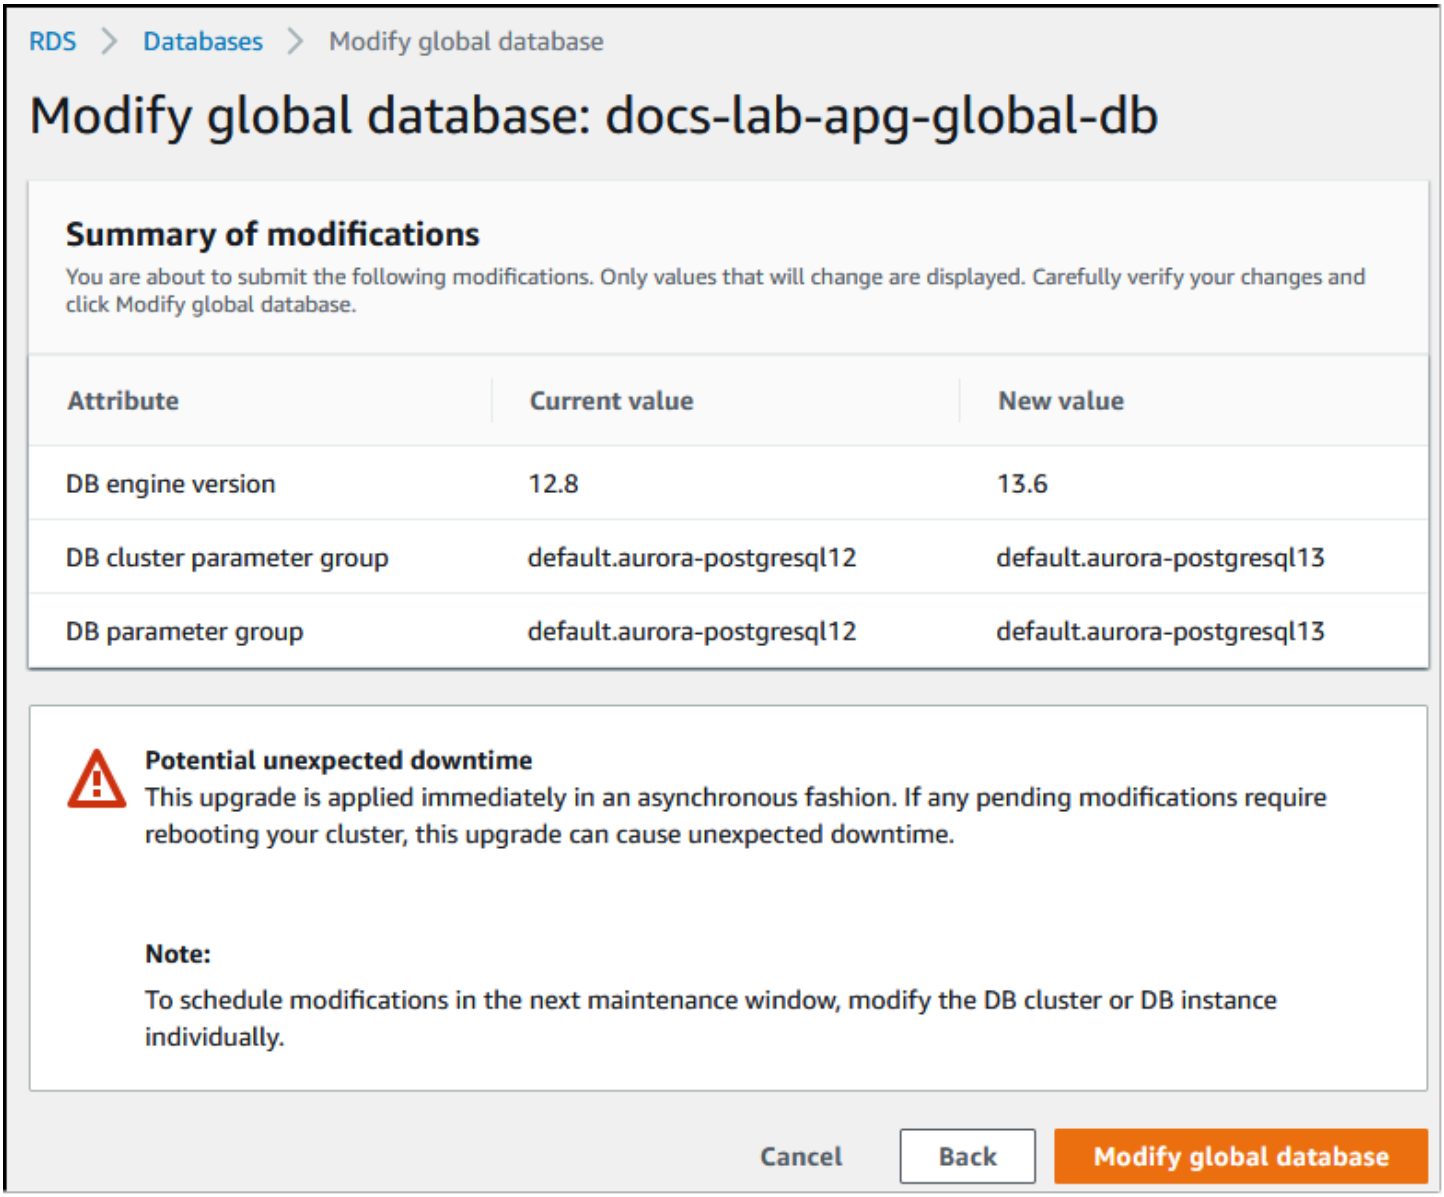

Rather than using the console, you can start the upgrade process by using the Amazon CLI or the RDS API. As with the console, you operate on the Aurora global database cluster rather than any of its constituents, as follows:

- Use the modify-global-cluster Amazon CLI command to start the upgrade for your Aurora global database by using the Amazon CLI.
- Use the ModifyGlobalCluster API to start the upgrade.

Performing a minor version upgrade

You can use the following methods to upgrade the minor version of a DB cluster or to patch a DB cluster:

Topics

- Before performing a minor version upgrade
- How to perform minor version upgrades and apply patches
- Minor release upgrades and zero-downtime patching
- Limitations of zero-downtime patching
- Upgrading the Aurora PostgreSQL engine to a new minor version

Before performing a minor version upgrade

We recommend that you perform the following actions to reduce the downtime during a minor version upgrade:

- The Aurora DB cluster maintenance should be performed during a period of low traffic. Use Performance Insights to identify these time periods in order to configure the maintenance windows correctly. For more information on Performance Insights, see Monitoring DB load with Performance Insights on Amazon RDS. For more information on DB cluster maintenance window, Adjusting the preferred DB cluster maintenance window.
- Use Amazon SDKs that support exponential backoff and jitter as a best practice. For more information, see Exponential Backoff And Jitter.

How to perform minor version upgrades and apply patches

Minor version upgrades and patches become available in Amazon Web Services Regions only after rigorous testing. Before releasing upgrades and patches, Aurora PostgreSQL tests to ensure that known security issues, bugs, and other issues that emerge after the release of the minor community version don't disrupt Aurora PostgreSQL fleet stability.

If you turn on **Enable auto minor version upgrade**, Aurora PostgreSQL periodically upgrades your DB cluster during your specified maintenance window. Make sure that the **Enable auto minor version upgrade** option is turned on for all instances in your Aurora PostgreSQL DB cluster. For information on how to set **Auto minor version upgrade**, and how the setting works when applied at the cluster and instance levels, see Automatic minor version upgrades for Aurora DB clusters.

Check the value of the **Enable auto minor version upgrade** option for all your Aurora PostgreSQL DB clusters by using the describe-db-instances Amazon CLI command as follows.


```
aws rds describe-db-instances \
  --query '*[].
{DBClusterIdentifier:DBClusterIdentifier,DBInstanceIdentifier:DBInstanceIdentifier,AutoMinorVer
```

This query returns a list of all Aurora DB clusters and their instances with a `true` or `false` value for the status of the `AutoMinorVersionUpgrade` setting. The command assumes that you have your Amazon CLI configured to target your default Amazon Web Services Region.

For more information about the AmVU option and how to modify your Aurora DB cluster to use it, see Automatic minor version upgrades for Aurora DB clusters.

You can upgrade your Aurora PostgreSQL DB clusters to new minor versions either by responding to maintenance tasks, or by modifying the cluster to use the new version.

You can identify any available upgrades or patches for your Aurora PostgreSQL DB clusters by using the RDS console and opening the **Recommendations** menu. There, you can find a list of various maintenance issues such as **Old minor versions**. Depending on your production environment, you can choose to **Schedule** the upgrade or take immediate action, by choosing **Apply now**, as shown following.

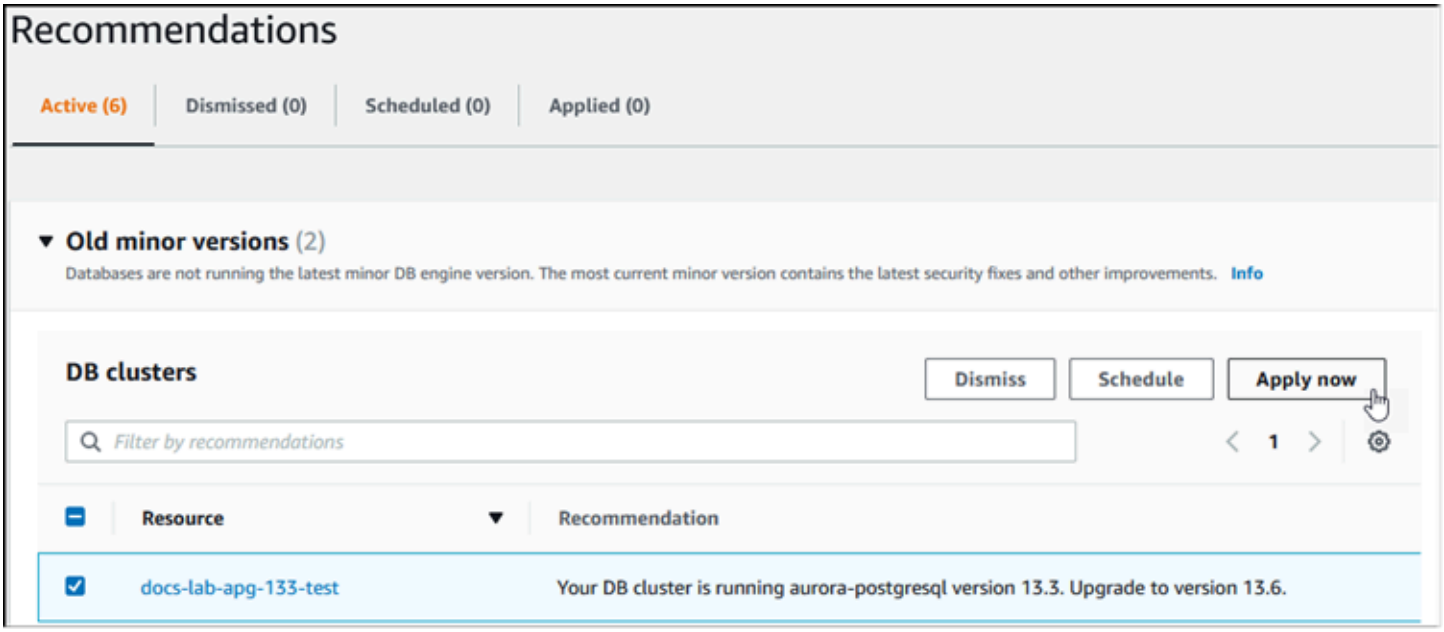

To learn more about how to maintain an Aurora DB cluster, including how to manually apply patches and minor version upgrades, see Maintaining an Amazon Aurora DB cluster.

Minor release upgrades and zero-downtime patching

Upgrading an Aurora PostgreSQL DB cluster involves the possibility of an outage. During the upgrade process, the database is shut down as it's being upgraded. If you start the upgrade while the database is busy, you lose all connections and transactions that the DB cluster is processing. If you wait until the database is idle to perform the upgrade, you might have to wait a long time.

The zero-downtime patching (ZDP) feature improves the upgrading process. With ZDP, both minor version upgrades and patches can be applied with minimal impact to your Aurora PostgreSQL DB cluster. ZDP is used when applying patches or newer minor version upgrades to Aurora PostgreSQL versions and other higher releases of these minor versions and newer major versions. That is, upgrading to new minor versions from any of these releases onward uses ZDP.

The following table shows the Aurora PostgreSQL versions and DB instance classes where ZDP is available:

Version	db.r* instance classes	db.t* instance classes	db.x* instance classes	db.serverless instance class
10.21 and higher versions	Yes	Yes	Yes	N/A
11.16 and higher versions	Yes	Yes	Yes	N/A
11.17 and higher versions	Yes	Yes	Yes	N/A
12.11 and higher versions	Yes	Yes	Yes	N/A
12.12 and higher versions	Yes	Yes	Yes	N/A
13.7 and higher versions	Yes	Yes	Yes	N/A
13.8 and higher versions	Yes	Yes	Yes	Yes

Version	db.r* instance classes	db.t* instance classes	db.x* instance classes	db.serverless instance class
14.3 and higher versions	Yes	Yes	Yes	N/A
14.4 and higher versions	Yes	Yes	Yes	N/A
14.5 and higher versions	Yes	Yes	Yes	Yes
15.3 and higher versions	Yes	Yes	Yes	Yes
16.1 and higher versions	Yes	Yes	Yes	Yes

During the upgrade process using ZDP, the database engine looks for a quiet point to pause all new transactions. This action safeguards the database during patches and upgrades. To make sure that your applications run smoothly with paused transactions, we recommend integrating retry logic into your code. This approach ensures that the system can manage any brief downtime without failing and can retry the new transactions after the upgrade.

When ZDP completes successfully, application sessions are maintained except for those with dropped connections, and the database engine restarts while the upgrade is still in progress. Although the database engine restart can cause a temporary drop in throughput, this typically lasts only for a few seconds or at most, approximately one minute.

In some cases, zero-downtime patching (ZDP) might not succeed. For example, parameter changes that are in a `pending` state on your Aurora PostgreSQL DB cluster or its instances interfere with ZDP.

You can find metrics and events for ZDP operations in **Events** page in the console. The events include the start of the ZDP upgrade and completion of the upgrade. In this event you can find how long the process took, and the numbers of preserved and dropped connections that occurred during the restart. You can find details in your database error log.

Limitations of zero-downtime patching

The following limitations apply to zero-downtime patching:

- ZDP tries to preserve current client connections to your Aurora PostgreSQL writer instance throughout the Aurora PostgreSQL upgrade process. However, in the following cases, connections will be dropped for ZDP to complete:
  - Long running query or transactions are in progress.
  - Data definition language (DDL) statements are running.
  - Temporary tables or table locks are in use.
  - All sessions are listening on notification channels.
  - A cursor in 'WITH HOLD' status is in use.
  - TLSv1.1 connections are in use. Starting with Aurora PostgreSQL versions later than 16.1, 15.3, 14.8, 13.11, 12.15, and 11.20, ZDP is supported with TLSv1.3 connections.
- ZDP isn't supported in the following cases:
  - During the upgrade of any Aurora reader instances.
  - During the upgrade of any Aurora reader instances that are part of an Aurora Global Database cluster in a secondary Region.
  - During OS patches and OS upgrades.

Upgrading the Aurora PostgreSQL engine to a new minor version

You can upgrade your Aurora PostgreSQL DB cluster to a new minor version by using the console, the Amazon CLI, or the RDS API. Before performing the upgrade, we recommend that you follow the same best practice that we recommend for major version upgrades. As with new major versions, new minor versions can also have optimizer improvements, such as fixes, that can cause query plan regressions. To ensure plan stability, we recommend that you use the Query Plan Management (QPM) extension as detailed in Ensuring plan stability after a major version upgrade.

Console

To upgrade the engine version of your Aurora PostgreSQL DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

2. In the navigation pane, choose **Databases**, and then choose the DB cluster that you want to upgrade.
3. Choose **Modify**. The **Modify DB cluster** page appears.
4. For **Engine version**, choose the new version.
5. Choose **Continue** and check the summary of modifications.
6. To apply the changes immediately, choose **Apply immediately**. Choosing this option can cause an outage in some cases. For more information, see Modifying an Amazon Aurora DB cluster.
7. On the confirmation page, review your changes. If they are correct, choose **Modify Cluster** to save your changes.

   Or choose **Back** to edit your changes or **Cancel** to cancel your changes.

Amazon CLI

To upgrade the engine version of a DB cluster, use the modify-db-cluster Amazon CLI command with the following parameters:

- `--db-cluster-identifier` – The name of your Aurora PostgreSQL DB cluster.
- `--engine-version` – The version number of the database engine to upgrade to. For information about valid engine versions, use the Amazon CLI describe-db-engine-versions command.
- `--no-apply-immediately` – Apply changes during the next maintenance window. To apply changes immediately, use `--apply-immediately` instead.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier mydbcluster \
    --engine-version new_version \
    --no-apply-immediately
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --engine-version new_version ^
```

```
    --no-apply-immediately
```

RDS API

To upgrade the engine version of a DB cluster, use the ModifyDBCluster operation. Specify the following parameters:

- `DBClusterIdentifier` – The name of the DB cluster, for example *`mydbcluster`*.
- `EngineVersion` – The version number of the database engine to upgrade to. For information about valid engine versions, use the DescribeDBEngineVersions operation.
- `ApplyImmediately` – Whether to apply changes immediately or during the next maintenance window. To apply changes immediately, set the value to `true`. To apply changes during the next maintenance window, set the value to `false`.

Upgrading PostgreSQL extensions

Upgrading your Aurora PostgreSQL DB cluster to a new major or minor version doesn't upgrade the PostgreSQL extensions at the same time. For most extensions, you upgrade the extension after the major or minor version upgrade completes. However, in some cases, you upgrade the extension before you upgrade the Aurora PostgreSQL DB engine. For more information, see the list of extensions to update in Testing an upgrade of your production DB cluster to a new major version.

Installing PostgreSQL extensions requires `rds_superuser` privileges. Typically, an `rds_superuser` delegates permissions over specific extensions to relevant users (roles), to facilitate the management of a given extension. That means that the task of upgrading all the extensions in your Aurora PostgreSQL DB cluster might involve many different users (roles). Keep this in mind especially if you want to automate the upgrade process by using scripts. For more information about PostgreSQL privileges and roles, see Security with Amazon Aurora PostgreSQL.

> **Note**
>
> For information about updating the PostGIS extension, see Managing spatial data with the PostGIS extension (Step 6: Upgrade the PostGIS extension).
> To update the `pg_repack` extension, drop the extension and then create the new version in the upgraded DB instance. For more information, see pg_repack installation in the `pg_repack` documentation.

To update an extension after an engine upgrade, use the `ALTER EXTENSION UPDATE` command.

```
ALTER EXTENSION extension_name UPDATE TO 'new_version';
```

To list your currently installed extensions, use the PostgreSQL pg_extension catalog in the following command.

```
SELECT * FROM pg_extension;
```

To view a list of the specific extension versions that are available for your installation, use the PostgreSQL pg_available_extension_versions view in the following command.

```
SELECT * FROM pg_available_extension_versions;
```

Alternative blue/green upgrade technique

In some situations, your top priority is to perform an immediate switchover from the old cluster to an upgraded one. In such situations, you can use a multistep process that runs the old and new clusters side-by-side. Here, you replicate data from the old cluster to the new one until you are ready for the new cluster to take over. For details, see *Using Blue/Green Deployments for database updates*.

Using an Aurora PostgreSQL long-term support (LTS) release

Each new Aurora PostgreSQL version remains available for a certain amount of time for you to use when you create or upgrade a DB cluster. After this period, you must upgrade any clusters that use that version. You can manually upgrade your cluster before the support period ends, or Aurora can automatically upgrade it for you when its Aurora PostgreSQL version is no longer supported.

Aurora designates certain Aurora PostgreSQL versions as long-term support (LTS) releases. Database clusters that use LTS releases can stay on the same version longer and undergo fewer upgrade cycles than clusters that use non-LTS releases. LTS minor versions include only bug fixes (through patch versions) for critical stability and security issues; an LTS version doesn't include new features released after its introduction.

Once a year, DB clusters running on an LTS minor version are patched to the latest patch version of the LTS release. We do this patching to help ensure that you benefit from cumulative security and

stability fixes. We might patch an LTS minor version more frequently if there are critical fixes, such as for security, that need to be applied.

> **Note**
>
> If you want to remain on an LTS minor version for the duration of its lifecycle, make sure to disable automatic minor version upgrade for your DB instances. To avoid automatically upgrading your DB cluster from the LTS minor version, clear the **Enable auto minor version upgrade** check box on any DB instance in your Aurora cluster.

We recommend that you upgrade to the latest release, instead of using the LTS release, for most of your Aurora PostgreSQL clusters. Doing so takes advantage of Aurora as a managed service and gives you access to the latest features and bug fixes. LTS releases are intended for clusters with the following characteristics:

- You can't afford downtime on your Aurora PostgreSQL application for upgrades outside of rare occurrences for critical patches.
- The testing cycle for the cluster and associated applications takes a long time for each update to the Aurora PostgreSQL database engine.
- The database version for your Aurora PostgreSQL cluster has all the DB engine features and bug fixes that your application needs.

The current LTS releases for Aurora PostgreSQL are as follows:

- PostgreSQL 17.7. It was released on December 18, 2025. For more information, see PostgreSQL 17.7 in the *Release Notes for Aurora PostgreSQL*.
- PostgreSQL 16.8. It was released on April 07, 2025. For more information, see PostgreSQL 16.8 in the *Release Notes for Aurora PostgreSQL*.
- PostgreSQL 15.10. It was released on December 27, 2024. For more information, see PostgreSQL 15.10 in the *Release Notes for Aurora PostgreSQL*.
- PostgreSQL 14.6. It was released on January 20, 2023. For more information, see PostgreSQL 14.6 in the *Release Notes for Aurora PostgreSQL*.
- PostgreSQL 13.9. It was released on January 20, 2023. For more information, see PostgreSQL 13.9 in the *Release Notes for Aurora PostgreSQL*.

- PostgreSQL 12.9. It was released on February 25, 2022. For more information, see PostgreSQL 12.9 in the *Release Notes for Aurora PostgreSQL*.
- PostgreSQL 11.9 (Aurora PostgreSQL release 3.4. It was released on December 11, 2020. For more information about this version, see PostgreSQL 11.9, Aurora PostgreSQL release 3.4 in the *Release Notes for Aurora PostgreSQL*.

For details about support timelines and release cycles for the LTS versions, see Release calendars for Aurora PostgreSQL.

For information about how to identify Aurora and database engine versions, see Identifying versions of Amazon Aurora PostgreSQL.

Using Amazon Aurora PostgreSQL Limitless Database

Amazon Aurora PostgreSQL Limitless Database provides automated horizontal scaling to process millions of write transactions per second and manages petabytes of data while maintaining the simplicity of operating inside a single database. With Aurora PostgreSQL Limitless Database, you can focus on building high-scale applications without having to build and maintain complex solutions for scaling your data across multiple DB instances to support your workloads.

Topics

- Aurora PostgreSQL Limitless Database architecture
- Getting started with Aurora PostgreSQL Limitless Database
- Aurora PostgreSQL Limitless Database requirements and considerations
- Prerequisites for using Aurora PostgreSQL Limitless Database
- Creating a DB cluster that uses Aurora PostgreSQL Limitless Database
- Working with DB shard groups
- Creating Aurora PostgreSQL Limitless Database tables
- Loading data into Aurora PostgreSQL Limitless Database
- Querying Aurora PostgreSQL Limitless Database
- Managing Aurora PostgreSQL Limitless Database
- Monitoring Aurora PostgreSQL Limitless Database
- Backing up and restoring Aurora PostgreSQL Limitless Database
- Upgrading Amazon Aurora PostgreSQL Limitless Database
- Aurora PostgreSQL Limitless Database reference


Aurora PostgreSQL Limitless Database architecture

Limitless Database achieves scale with a two-layer architecture consisting of multiple database nodes. Nodes are either routers or shards.

- Shards are Aurora PostgreSQL DB instances that each store a subset of the data for your database, allowing for simultaneous processing to achieve higher write throughput.
- Routers manage the distributed nature of the database and present a single database image to database clients. Routers maintain metadata about where data is stored, parse incoming SQL commands and send those commands to shards. Then they aggregate data from shards to return a single result to the client, and manage distributed transactions to maintain consistency across the entire distributed database.

Aurora PostgreSQL Limitless Database differs from standard Aurora DB clusters by having a DB shard group instead of a writer DB instance and reader DB instances. All of the nodes that make up your Limitless Database architecture are contained in the DB shard group. The individual shards and routers in the DB shard group aren't visible in your Amazon Web Services account. You use the DB cluster endpoint to access Limitless Database.

The following figure shows the high-level architecture of Aurora PostgreSQL Limitless Database.

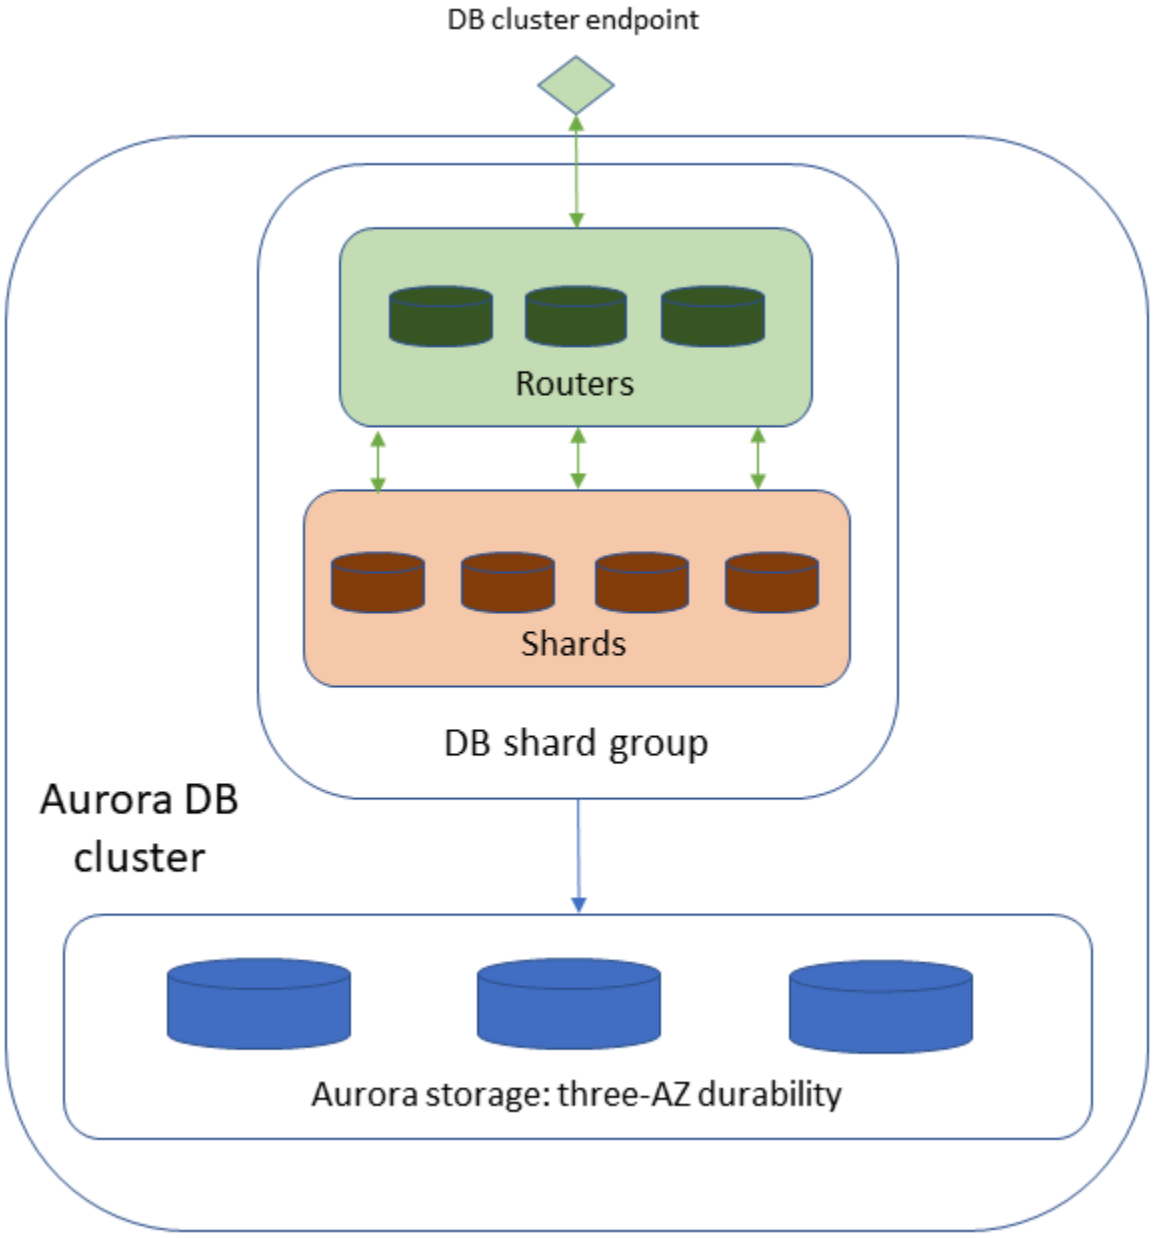

For more information on the architecture of Aurora PostgreSQL Limitless Database and how you can use it, see Achieving scale with Amazon Aurora PostgreSQL Limitless Database on the Amazon Events channel on YouTube.

For more information on the architecture of a standard Aurora DB cluster, see Amazon Aurora DB clusters.

Key terms for Aurora PostgreSQL Limitless Database

DB shard group

A container for Limitless Database nodes (shards and routers).

Router

A node that accepts SQL connections from clients, sends SQL commands to shards, maintains system-wide consistency, and returns results to clients.

Shard

A node that stores a subset of sharded tables, full copies of reference tables, and standard tables. Accepts queries from routers, but can't be connected to directly by the clients.

Sharded table

A table with its data partitioned across shards.

Shard key

A column or set of columns in a sharded table that's used to determine partitioning across shards.

Collocated tables

Two sharded tables that share the same shard key and are explicitly declared as collocated. All data for the same shard key value is sent to the same shard.

Reference table

A table with its data copied in full on every shard.

Standard table

The default table type in Limitless Database. You can convert standard tables into sharded and reference tables.

All standard tables are stored on the same shard selected by the system, enabling joins between standard tables to be performed within a single shard. However, standard tables are limited by the shard's maximum capacity (128 TiB). This shard also stores data from sharded and reference tables, so the effective limit for standard tables is lower than 128 TiB.

Table types for Aurora PostgreSQL Limitless Database

Aurora PostgreSQL Limitless Database supports three types of table: *sharded*, *reference*, and *standard*.

Sharded tables have their data distributed across all of the shards in the DB shard group. Limitless Database does this automatically by using a *shard key*, which is a column or set of columns that you specify when partitioning the table. All of the data with the same value for the shard key is sent to the same shard. Sharding is hash-based, not range- or list-based.

The following are good use cases for sharded tables:

- The application works with a distinct subset of data.
- The table is very large.
- The table potentially grows faster than other tables.

Sharded tables can be *collocated*, meaning that they share the same shard key, and that all of the data from both tables with the same shard key value is sent to the same shard. If you collocate tables and join them using the shard key, the join can be performed on a single shard because all of the necessary data is present on that shard.

Reference tables have a full copy of all their data on every shard in the DB shard group. Reference tables are commonly used for smaller tables with a lower write volume, but that still need to be joined frequently and don't lend themselves to sharding. Examples of reference tables include date tables, and tables of geographic data such as state, city, and postal code.

Standard tables are the default table type in Aurora PostgreSQL Limitless Database. They aren't distributed tables. Aurora PostgreSQL Limitless Database supports joins between standard tables and standard, sharded, and reference tables.

Billing for Aurora PostgreSQL Limitless Database

For information on how you're charged for Aurora PostgreSQL Limitless Database, see DB instance billing for Aurora.

For Aurora pricing information, see the Aurora pricing page.

Getting started with Aurora PostgreSQL Limitless Database

You perform the following actions to get started with Aurora PostgreSQL Limitless Database:

1. Create an Aurora PostgreSQL DB cluster and a DB shard group for Limitless Database. For more information, see Creating a DB cluster that uses Aurora PostgreSQL Limitless Database.
2. Create sharded and reference tables in the DB shard group. For more information, see Creating Aurora PostgreSQL Limitless Database tables.
3. Change the capacity for your DB shard group, split shards, and add routers. For more information, see Working with DB shard groups.
4. Load data into the DB shard group. For more information, see Loading data into Aurora PostgreSQL Limitless Database.
5. Run queries and other SQL statements on the DB shard group. For more information, see Querying Aurora PostgreSQL Limitless Database.
6. Monitor the performance of Limitless Database. For more information, see Monitoring Aurora PostgreSQL Limitless Database.

Aurora PostgreSQL Limitless Database requirements and considerations

Aurora PostgreSQL Limitless Database has the following requirements and considerations.

Topics

- Requirements for Aurora PostgreSQL Limitless Database
- Considerations for Aurora PostgreSQL Limitless Database
- Features not supported in Aurora PostgreSQL Limitless Database

Requirements for Aurora PostgreSQL Limitless Database

Make sure to follow these requirements for Aurora PostgreSQL Limitless Database.

- Aurora PostgreSQL Limitless Database is available in all Amazon Web Services Regions except Asia Pacific (Taipei).

  > **Note**
  >
  > If you create your Aurora PostgreSQL Limitless Database DB cluster in US East (N. Virginia), don't include the Availability Zone (AZ) with the AZ ID `use1-az3` in your DB subnet group. Because of resource limitations, Aurora serverless (and therefore Aurora PostgreSQL Limitless Database) isn't supported in the `use1-az3` AZ. AZ names, such as `us-east-1e`, map to different AZ IDs in each Amazon Web Services account. For more information, see Availability Zone IDs for your Amazon resources.

- Aurora PostgreSQL Limitless Database supports only the Aurora I/O-Optimized DB cluster storage configuration. For more information, see Storage configurations for Amazon Aurora DB clusters.
- Aurora PostgreSQL Limitless Database uses special Aurora PostgreSQL DB engine versions for Aurora PostgreSQL Limitless Database: `16.X-limitless`. See also Available Aurora PostgreSQL Limitless Database Versions
- Your DB cluster can't have any writer or reader DB instances.
- You must use Enhanced Monitoring and Performance Insights. The Performance Insights retention time must be at least 1 month (31 days).

- You must export the PostgreSQL log to Amazon CloudWatch Logs.

> **Note**
>
> Some required features, such as Enhanced Monitoring, Performance Insights, and CloudWatch Logs, incur extra charges. For Aurora pricing information, see the Aurora pricing page.

Considerations for Aurora PostgreSQL Limitless Database

The following considerations apply to DB shard groups in Aurora PostgreSQL Limitless Database:

- You can have only one DB shard group per DB cluster.
- You can have up to five DB shard groups per Amazon Web Services Region.

  Therefore, you can have up to five Aurora PostgreSQL Limitless Database DB clusters per Amazon Web Services Region. For more information, see Quotas in Amazon Aurora.
- You can set the maximum capacity of a DB shard group to 16–6144 ACUs. For capacity limits higher than 6144 ACUs, contact Amazon.

  The initial number of routers and shards is determined by the maximum capacity that you set when you create a DB shard group. For more information, see Correlating DB shard group maximum capacity with the number of routers and shards created.
- The number of routers and shards doesn't change when you modify the maximum capacity of a DB shard group.
- Make sure that the DB subnet where you create the DB shard group has enough free IP addresses for connecting with the DB shard group. You need one IP address for each router and up to three IP addresses for each shard in the DB shard group.

  For more information on the number of routers created when you create a DB shard group, see Correlating DB shard group maximum capacity with the number of routers and shards created.
- If you make your DB shard group publicly accessible, make sure to set up an internet gateway in your VPC.
- You use SQL functions to split shards and add routers.
- Merging shards isn't supported.

- You can't delete individual shards and routers.
- You can't modify (perform UPDATE operations on) shard keys in any way, including changing their values in table rows.

  To change a shard key, delete and then re-create it.
- The repeatable read, read committed, and read uncommitted isolation levels are supported. You can't set the isolation level to serializable.
- Some SQL commands aren't supported. For more information, see Aurora PostgreSQL Limitless Database reference.
- Not all PostgreSQL extensions are supported. For more information, see Extensions.
- When creating a shard group, or when adding new shard group nodes (shards or routers), those nodes are created in one of the Availability Zones (AZs) available to the DB cluster. You can't choose a specific AZ for individual nodes.
- If you use a compute redundancy of 2 (two compute standbys for the DB shard group), make sure that your DB subnet group has at least three AZs.
- Aurora PostgreSQL Limitless Database supports up to 54 characters for sharded table names.

The following considerations apply to the Aurora PostgreSQL Limitless Database DB cluster:

- We recommend that you use Amazon managed policies to limit permissions for your database and applications to those that customers need for their use cases. For more information, see Policy best practices.
- When you create your Aurora PostgreSQL Limitless Database DB cluster, you only set scaling parameters for the DB shard group.
- If you need to delete your DB cluster, you must delete the DB shard group first.
- Aurora PostgreSQL Limitless Database can't be a replication source.

Features not supported in Aurora PostgreSQL Limitless Database

The following Aurora PostgreSQL features aren't supported in Aurora PostgreSQL Limitless Database:

- Active Directory (Kerberos) authentication
- Amazon DevOps Guru
- Amazon ElastiCache
- Amazon RDS Blue/Green Deployments
- Amazon RDS Proxy
- Aurora Auto Scaling (adding reader instances to the DB cluster automatically)
- Aurora Global Database
- Aurora machine learning
- Aurora recommendations
- Aurora Serverless v1
- Aurora zero-ETL integrations
- Amazon Backup
- Amazon Lambda integration
- Amazon Secrets Manager
- Babelfish for Aurora PostgreSQL
- Cloning DB clusters
- Custom endpoints
- Database activity streams
- Read replicas
- RDS Data API

Prerequisites for using Aurora PostgreSQL Limitless Database

To use Aurora PostgreSQL Limitless Database, you must first perform the following tasks.

Topics

- Enabling DB shard group operations

Enabling DB shard group operations

Before you can create a DB shard group, you must enable DB shard group operations.

- Add the following section to the IAM policy of the IAM role of the user that accesses Aurora PostgreSQL Limitless Database:

  JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "AllowDBShardGroup",
            "Effect": "Allow",
            "Action": [
                "rds:CreateDBShardGroup",
                "rds:DescribeDBShardGroups",
                "rds:DeleteDBShardGroup",
                "rds:ModifyDBShardGroup",
                "rds:RebootDBShardGroup"
            ],
            "Resource": [
                "arn:aws-cn:rds:*:*:shard-group:*",
                "arn:aws-cn:rds:*:*:cluster:*"
            ]
        }
    ]
}
```

Creating a DB cluster that uses Aurora PostgreSQL Limitless Database

You create a new Aurora DB cluster using the Limitless Database version of Aurora PostgreSQL, and add a DB shard group to the cluster. When adding a DB shard group, you specify the maximum compute capacity for the entire DB shard group (sum of the capacities for all routers and shards) in Aurora capacity units (ACUs). Each ACU is a combination of approximately 2 gibibytes (GiB) of memory, corresponding CPU, and networking. Scaling increases or decreases capacity for your DB shard group, depending on your application workload, similar to how Aurora serverless works.

Topics

- Correlating DB shard group maximum capacity with the number of routers and shards created
- Creating your DB cluster

Correlating DB shard group maximum capacity with the number of routers and shards created

The initial number of routers and shards in a DB shard group is determined by the maximum capacity that you set when you create the DB shard group. The higher the maximum capacity, the greater the number of routers and shards that are created in the DB shard group.

Each node (shard or router) has its own current capacity value, also measured in ACUs.

- Limitless Database scales a node up to a higher capacity when its current capacity is too low to handle the load. However, nodes won't scale up when the total capacity is at the maximum.
- Limitless Database scales the node down to a lower capacity when its current capacity is higher than needed. However, nodes won't scale down when the total capacity is at the minimum.

The following table shows the correlation between the DB shard group maximum capacity in Aurora capacity units (ACUs) and the number of nodes (routers and shards) created.

> **Note**
>
> These values are subject to change.
> If you set the compute redundancy to a nonzero value, the total number of shards will be doubled or tripled. This will incur extra costs.

The nodes in compute standbys are scaled up and down to the same capacity as the writer. You don't set the capacity range separately for the standbys.

Total nodes	Routers	Shards	Default minimum capacity (ACUs)	Maximum capacity range (ACUs)
4	2	2	16	16–400
5	2	3	20	401–500
6	2	4	24	501–600
7	3	4	28	601–700
8	3	5	32	701–800
9	3	6	36	801–900
10	4	6	40	901–1000
11	4	7	44	1001–1100
12	4	8	48	1101–1200
13	5	8	52	1201–1300
14	5	9	56	1301–1400
15	5	10	60	1401–1500
16	6	10	64	1501–1600
17	6	11	68	1601–1700
18	6	12	72	1701–1800
19	7	12	76	1801–1900
20	7	13	80	1901–2000

Total nodes	Routers	Shards	Default minimum capacity (ACUs)	Maximum capacity range (ACUs)
21	7	14	84	2001–2100
22	8	14	88	2101–2200
23	8	15	92	2201–2300
24	8	16	96	2301–6144

Maximum capacity–based dynamic configuration for the DB shard group is available only during creation. The number of routers and shards remains the same when the maximum capacity is modified. For more information, see Changing the capacity of a DB shard group.

You can use SQL commands to add shards and routers to a DB shard group. For more information, see the following:

- Splitting a shard in a DB shard group
- Adding a router to a DB shard group

> **Note**
>
> You can't delete shards or routers.

Creating your DB cluster

Use the following procedures to create an Aurora PostgreSQL DB cluster that uses Aurora PostgreSQL Limitless Database.

You can use either the Amazon Web Services Management Console or the Amazon CLI to create your DB cluster that uses Aurora PostgreSQL Limitless Database. You create the primary DB cluster and the DB shard group.

Console

When you use the Amazon Web Services Management Console to create the primary DB cluster, the DB shard group is also created in the same procedure.

To create the DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Create database**.

   The **Create database** page displays.
3. For **Engine type**, choose **Aurora (PostgreSQL Compatible)**.
4. For **Version**, choose one of the following:

   - **Aurora PostgreSQL with Limitless Database (Compatible with PostgreSQL 16.4)**
   - **Aurora PostgreSQL with Limitless Database (Compatible with PostgreSQL 16.6)**
5. For **Aurora PostgreSQL Limitless Database**:



a. Enter a **DB shard group identifier**.

> **Important**
>
> After you create the DB shard group, you can't change the DB cluster identifier or the DB shard group identifier.

b. For **DB shard group capacity range**:

   i. Enter the **Minimum capacity (ACUs)**. Use a value of at least 16 ACUs.

      For a development environment, the default value is 16 ACUs. For a production environment, the default value is 24 ACUs.

   ii. Enter the **Maximum capacity (ACUs)**. Use a value of at least 16 ACUs or at most 6144 ACUs.

      For a development environment, the default value is 64 ACUs. For a production environment, the default value is 384 ACUs.

   For more information, see Correlating DB shard group maximum capacity with the number of routers and shards created.

c. For **DB shard group deployment**, choose whether to create standbys for the DB shard group:

- **No compute redundancy** – Creates a DB shard group without standbys for each shard. This is the default value.
- **Compute redundancy with a single failover target** – Creates a DB shard group with one compute standby in a different Availability Zone (AZ).
- **Compute redundancy with two failover targets** – Creates a DB shard group with two compute standbys in two different AZs.

> **Note**
>
> If you set the compute redundancy to a nonzero value, the total number of shards DB instances will be doubled or tripled. These extra DB instances are compute standbys, scaled up and down to the same capacity as the writer instance. You don't set the capacity range separately for the standbys. Therefore, ACU usage and bill correspondingly doubles and triples. To know the exact ACU usage incurred from compute redundancy, refer to the `DBShardGroupComputeRedundancyCapacity` metric in DBShardGroup metrics.

d. Choose whether to make the DB shard group publicly accessible.

> **Note**
>
> You can't modify this setting after you create the DB shard group.

6. For **Connectivity**:

a. (Optional) Select **Connect to an EC2 compute resource**, then choose an existing EC2 instance or create a new one.

> **Note**
>
> If you connect to an EC2 instance, you can't make the DB shard group publicly accessible.

b. For **Network type**, choose either **IPv4** or **Dual-stack mode**.

c. Choose the **Virtual private cloud (VPC)** and **DB subnet group**, or use the default settings.


> **Note**
>
> If you create your Limitless Database DB cluster in the US East (N. Virginia) Region, don't include the Availability Zone (AZ) with the AZ ID `use1-az3` in your DB subnet group. Because of resource limitations, Aurora serverless—and therefore Limitless Database—isn't supported in the `use1-az3` AZ. AZ names, such as `us-east-1e`, map to different AZ IDs in each Amazon Web Services account. For more information, see Availability Zone IDs for your Amazon resources.

d. Choose the **VPC security group (firewall)**, or use the default setting.

7. For **Database authentication**, choose either **Password authentication** or **Password and IAM database authentication**.
8. For **Monitoring**, make sure that the **Turn on Performance Insights** and **Enable Enhanced Monitoring** check boxes are selected.

   For Performance Insights, choose a retention time of at least 1 month.
9. Expand the last **Additional configuration** on the page.
10. For **Log exports**, make sure that the **PostgreSQL log** check box is selected.
11. Specify other settings as needed. For more information, see Settings for Aurora DB clusters.
12. Choose **Create database**.

After the primary DB cluster and DB shard group are created, they're displayed on the **Databases** page.

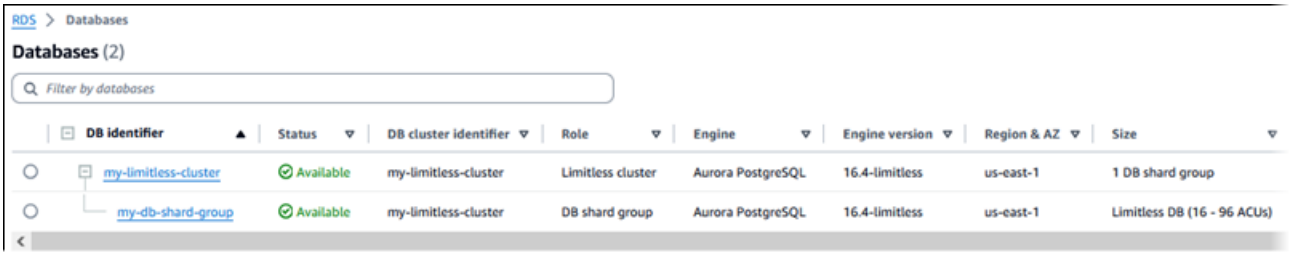

CLI

When you use the Amazon CLI to create a DB cluster that uses Aurora PostgreSQL Limitless Database, you perform the following tasks:

1. Create the primary DB cluster.
2. Create the DB shard group.

Create the primary DB cluster

The following parameters are required to create the DB cluster:

- `--db-cluster-identifier` – The name of your DB cluster.
- `--engine` – The DB cluster must use the `aurora-postgresql` DB engine.
- `--engine-version` – The DB cluster must use one of the DB engine versions:
  - `16.4-limitless`
  - `16.6-limitless`
- `--storage-type` – The DB cluster must use the `aurora-iopt1` DB cluster storage configuration.
- `--cluster-scalability-type` – Specifies the scalability mode of the Aurora DB cluster. When set to `limitless`, the cluster operates as an Aurora PostgreSQL Limitless Database. When set to `standard` (the default), the cluster uses normal DB instance creation.

  > **Note**
  >
  > You can't modify this setting after you create the DB cluster.

- `--master-username` – The name of the master user for the DB cluster.
- `--master-user-password` – The password for the master user.
- `--enable-performance-insights` – You must enable Performance Insights.
- `--performance-insights-retention-period` – The Performance Insights retention period must be at least 31 days.
- `--monitoring-interval` – The interval, in seconds, between points when Enhanced Monitoring metrics are collected for the DB cluster. This value can't be `0`.
- `--monitoring-role-arn` – The Amazon Resource Name (ARN) for the IAM role that permits RDS to send Enhanced Monitoring metrics to Amazon CloudWatch Logs.

- `--enable-cloudwatch-logs-exports` – You must export `postgresql` logs to CloudWatch Logs.

The following parameters are optional:

- `--db-subnet-group-name` – The DB subnet group to associate with the DB cluster. This also determines the VPC associated with the DB cluster.

  > **Note**
  >
  > If you create your Limitless Database DB cluster in the US East (N. Virginia) Region, don't include the Availability Zone (AZ) with the AZ ID `use1-az3` in your DB subnet group. Because of resource limitations, Aurora serverless—and therefore Limitless Database—isn't supported in the `use1-az3` AZ. AZ names, such as `us-east-1e`, map to different AZ IDs in each Amazon Web Services account. For more information, see Availability Zone IDs for your Amazon resources.

- `--vpc-security-group-ids` – A list of VPC security groups to associate with the DB cluster.
- `--performance-insights-kms-key-id` – The Amazon KMS key identifier for encryption of Performance Insights data. If you don't specify a KMS key, the default key for your Amazon Web Services account is used.
- `--region` – The Amazon Web Services Region where you create the DB cluster. It must be one that supports Aurora PostgreSQL Limitless Database.

To use the default VPC and VPC security group, omit the `--db-subnet-group-name` and `--vpc-security-group-ids` options.

To create the primary DB cluster

-
```
aws rds create-db-cluster \
    --db-cluster-identifier my-limitless-cluster \
    --engine aurora-postgresql \
    --engine-version 16.6-limitless \
    --storage-type aurora-iopt1 \
    --cluster-scalability-type limitless \
    --master-username myuser \
    --master-user-password mypassword \
    --db-subnet-group-name mysubnetgroup \
```

```
    --vpc-security-group-ids sg-c7e5b0d2 \
    --enable-performance-insights \
    --performance-insights-retention-period 31 \
    --monitoring-interval 5 \
    --monitoring-role-arn arn:aws-cn:iam::123456789012:role/EMrole \
    --enable-cloudwatch-logs-exports postgresql
```

For more information, see create-db-cluster.

Create the DB shard group

Next you create the DB shard group in the DB cluster that you just created. The following parameters are required:

- `--db-shard-group-identifier` – The name of your DB shard group.

  The DB shard group identifier has the following constraints:

  - It must be unique in the Amazon Web Services account and Amazon Web Services Region where you create it.
  - It must contain 1–63 letters, numbers, or hyphens.
  - The first character must be a letter.
  - It can't end with a hyphen or contain two consecutive hyphens.
  - **Important**

    After you create the DB shard group, you can't change the DB cluster identifier or the DB shard group identifier.

- `--db-cluster-identifier` – The name of the DB cluster in which you're creating the DB shard group.
- `--max-acu` – The maximum capacity of your DB shard group. It must be from 16–6144 ACUs. For capacity limits higher than 6144 ACUs, contact Amazon.

  The initial number of routers and shards is determined by the maximum capacity that you set when you create the DB shard group. The higher the maximum capacity, the greater the number of routers and shards that are created in the DB shard group. For more information, see Correlating DB shard group maximum capacity with the number of routers and shards created.

The following parameters are optional:

- `--compute-redundancy` – Whether to create standbys for the DB shard group. This parameter can have the following values:
  - `0` – Creates a DB shard group without standbys for each shard. This is the default value.
  - 1 – Creates a DB shard group with one compute standby in a different Availability Zone (AZ).
  - 2 – Creates a DB shard group with two compute standbys in two different AZs.

> **Note**
>
> If you set the compute redundancy to a nonzero value, the total number of shards will be doubled or tripled. This will incur extra costs.
> The nodes in compute standbys are scaled up and down to the same capacity as the writer. You don't set the capacity range separately for the standbys.

- `--min-acu` – The minimum capacity of your DB shard group. It must be at least 16 ACUs, which is the default value.
- `--publicly-accessible|--no-publicly-accessible` – Whether to assign publicly accessible IP addresses to the DB shard group. Access to the DB shard group is controlled by the security groups used by the cluster.

  The default is `--no-publicly-accessible`.

> **Note**
>
> You can't modify this setting after you create the DB shard group.

To create the DB shard group

- ```
  aws rds create-db-shard-group \
      --db-shard-group-identifier my-db-shard-group \
      --db-cluster-identifier my-limitless-cluster \
      --max-acu 1000
  ```
  ```

Working with DB shard groups

You perform the following tasks to add and manage a DB shard group for Aurora PostgreSQL Limitless Database.

Topics

- Connecting to your Aurora PostgreSQL Limitless Database DB cluster
- Finding the number of routers and shards in a DB shard group
- Describing DB shard groups
- Rebooting a DB shard group
- Changing the capacity of a DB shard group
- Splitting a shard in a DB shard group
- Adding a router to a DB shard group
- Deleting a DB shard group
- Adding a DB shard group to an existing Aurora PostgreSQL Limitless Database DB cluster

Connecting to your Aurora PostgreSQL Limitless Database DB cluster

To work with Aurora PostgreSQL Limitless Database, you connect to the cluster writer or reader endpoint. You can use `psql` or any other connection utility that works with PostgreSQL:

```
$ psql -h DB_cluster_endpoint -p port_number -U database_username -d postgres_limitless
```

The following example uses the endpoint for the DB cluster that you created in CLI.

```
$ psql -h my-limitless-cluster.cluster-ckifpdyyyxxx.us-east-1.rds.amazonaws.com -p 5432
 -U postgres -d postgres_limitless
```

> **Note**
>
> The default database for the DB shard group in Aurora PostgreSQL Limitless Database is `postgres_limitless`.

Using the Limitless Connection Plugin

When connecting to Aurora PostgreSQL Limitless Database, clients connect using the cluster endpoint, and are routed to a transaction router by Amazon Route 53. However, Route 53 is limited in its ability to load balance, and can allow uneven workloads on transaction routers. The Limitless Connection Plugin for the Amazon JDBC Driver addresses this by performing client-side load balancing with load awareness. For more information on the Amazon JDBC Driver, see Connecting to Aurora PostgreSQL with the Amazon Web Services (Amazon) JDBC Driver.

Finding the number of routers and shards in a DB shard group

You can use the following query to find the number of routers and shards:

```
SELECT * FROM rds_aurora.limitless_subclusters;

 subcluster_id | subcluster_type
---------------+-----------------
 1             | router
 2             | router
 3             | shard
 4             | shard
 5             | shard
 6             | shard
```

Describing DB shard groups

Use the `describe-db-shard-groups` Amazon CLI command to describe your DB shard groups. The following parameter is optional:

- `--db-shard-group-identifier` – The name of a DB shard group.

The following example describes a specific DB shard group.

```
aws rds describe-db-shard-groups --db-shard-group-identifier my-db-shard-group
```

The output resembles the following example.

```
{
    "DBShardGroups": [
        {
            "DBShardGroupResourceId": "shardgroup-8986d309a93c4da1b1455add17abcdef",
            "DBShardGroupIdentifier": "my-shard-group",
            "DBClusterIdentifier": "my-limitless-cluster",
            "MaxACU": 1000.0,
            "ComputeRedundancy": 0,
            "Status": "available",
            "PubliclyAccessible": false,
            "Endpoint": "my-limitless-cluster.limitless-ccetp2abcdef.us-
east-1.rds.amazonaws.com"
        }
```

```
    ]
}
```

Rebooting a DB shard group

Sometimes you have to reboot your DB shard group, for example when the `max_connections` parameter changes because of a maximum capacity change.

You can use the Amazon Web Services Management Console or Amazon CLI to change the capacity of a DB shard group.

Console

Use the following procedure.

Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

1. Navigate to the **Databases** page.
2. Select the DB shard group that you want to reboot.
3. For **Actions**, choose **Reboot**.
4. Choose **Confirm**.

CLI

To reboot a DB shard group, use the `reboot-db-shard-group` Amazon CLI command with the following parameter:

- `--db-shard-group-identifier` – The name of a DB shard group.

The following example reboots a DB shard group.

```
aws rds reboot-db-shard-group --db-shard-group-identifier my-db-shard-group
```

Changing the capacity of a DB shard group

You can use the Amazon Web Services Management Console or Amazon CLI to change the capacity of a DB shard group.


Console

Use the following procedure.

Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

1. Navigate to the **Databases** page.
2. Select the DB shard group that you want to modify.
3. For **Actions**, choose **Modify**.

   The **Modify DB shard group** page displays.

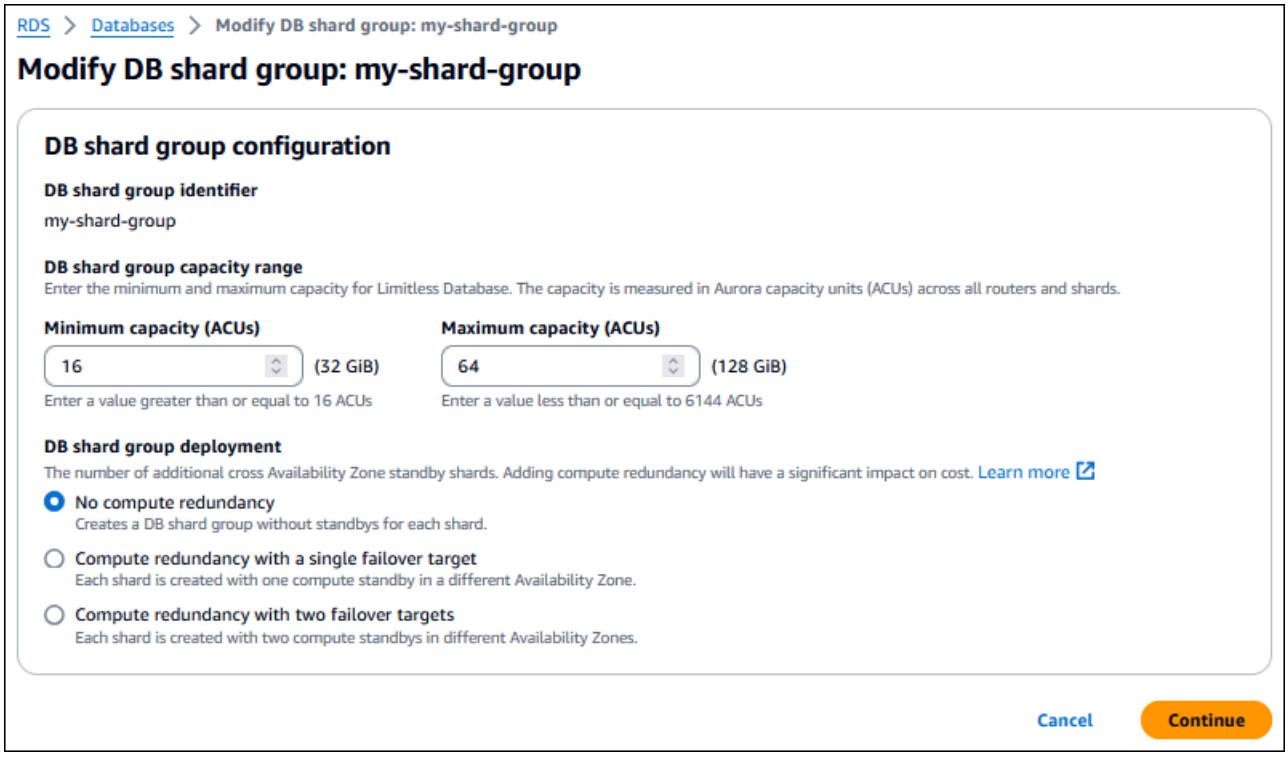

4. Enter a new **Minimum capacity (ACUs)** value, for example **`100`**.
5. Enter a new **Maximum capacity (ACUs)** value, for example **`1000`**.
6. Choose **Continue**.

   The confirmation page displays, with a summary of your changes.

7. Review your changes, then choose **Modify DB shard group**.

CLI

Use the `modify-db-shard-group` Amazon CLI command with the following parameters:

- `--db-shard-group-identifier` – The name of the DB shard group.
- `--max-acu` – The new maximum capacity of the DB shard group. You can set the maximum capacity of the DB shard group to 16–6144 ACUs. For capacity limits higher than 6144 ACUs, contact Amazon.

  The number of routers and shards doesn't change.
- `--min-acu` – The new minimum capacity of your DB shard group. It must be at least 16 ACUs, which is the default value.

The following CLI example changes the capacity range of a DB shard group to 100–1000 ACUs.

```
aws rds modify-db-shard-group \
    --db-shard-group-identifier my-db-shard-group \
    --min-acu 100 \
    --max-acu 1000
```

Splitting a shard in a DB shard group

You can split a shard in a DB shard group manually into two smaller shards. This is called a *user-initiated* shard split.

Aurora PostgreSQL Limitless Database can also split shards when they have very large amounts of data or very high usage. This is called a *system-initiated* shard split.

Topics

- Prerequisites
- Splitting a shard
- Tracking shard splits
- Finalizing shard splits
- Canceling a shard split

Prerequisites

User-initiated shard splits have the following prerequisites:

- You must have a DB shard group.
- The DB shard group can't be empty: it must contain at least one sharded table.
- A user must have the `rds_aurora_limitless_cluster_admin` privilege. The `rds_superuser` has this privilege; therefore the master user also has it. The `rds_superuser` can grant the privilege to other users:

```
/* Logged in as the master user or a user with rds_superuser privileges */
CREATE USER username;
GRANT rds_aurora_limitless_cluster_admin to username;
```

- You must know the subcluster (node) ID of the shard that you want to split. You can obtain the ID by using the following query:

```
SELECT * FROM rds_aurora.limitless_subclusters;

 subcluster_id | subcluster_type
---------------+-----------------
 1             | router
 2             | router
```

```
3               | shard
4               | shard
5               | shard
6               | shard
```

To enable system-initiated shard splits, set the following DB cluster parameters in a custom DB cluster parameter group associated with your DB cluster:

Parameter	Value
`rds_aurora.limitless_enable_auto_scale`	on
`rds_aurora.limitless_auto_scale_options`	Either `split_shard` or `add_router,split_shard`
`rds_aurora.limitless_finalize_split_shard_mode`	This parameter determines how *system-initiated* shard splits are finalized. The value can be one of the following: • `user_initiated` – You decide when to finalize the shard split. This is the default value. • `immediate` – Shard splits are finalized immediately. For more information, see Finalizing shard splits. **Note** This parameter applies only to system-initiated shard splits.

For more information, see DB cluster parameter groups for Amazon Aurora DB clusters.

Splitting a shard

To split a shard in a DB shard group, use the `rds_aurora.limitless_split_shard` function. This function starts a shard-split job that runs asynchronously.

```
SELECT rds_aurora.limitless_split_shard('subcluster_id');
```

Wait for the return of a job ID upon successful submission of the job, for example:

```
SELECT rds_aurora.limitless_split_shard('3');

    job_id
---------------
 1691300000000
(1 row)
```

> **Note**
>
> Concurrent shard split operations are not supported. Execute each operation sequentially and complete each operation before initiating another addition operation.

Tracking shard splits

You can use the job ID to track a shard-split job. To describe a particular job and get more details about it, run the following query:

```
SELECT * FROM rds_aurora.limitless_list_shard_scale_jobs(job_id);
```

For example:

```
SELECT * FROM rds_aurora.limitless_list_shard_scale_jobs(1691300000000);

    job_id     |    action   |      job_details      | status  |    submission_time
 |                  message
---------------+-------------+-----------------------+---------
+------------------------+-------------------------------------------
 1691300000000 | SPLIT_SHARD | Split Shard 3 by User | SUCCESS | 2023-08-06 05:33:20+00
 | Scaling job succeeded.                 +
```

```
               |             |                         |         |
 | New shard instance with ID 7 was created.
(1 row)
```

The query returns an error when you pass a nonexistent job as the input.

```
SELECT * from rds_aurora.limitless_list_shard_scale_jobs(1691300000001);

ERROR:  no job found with the job ID provided
```

You can track the status of all shard-split jobs by using the same query without a job ID, for example:

```
SELECT * FROM rds_aurora.limitless_list_shard_scale_jobs();

    job_id     |   action    |  job_details          |   status    |    submission_time
     |                 message
---------------+-------------+-----------------------+-------------
+------------------------
+------------------------------------------------------------
 1691200000000 | SPLIT_SHARD | Split Shard 3 by User | IN_PROGRESS | 2023-08-05
 01:46:40+00 |
 1691300000000 | SPLIT_SHARD | Split Shard 4 by User | SUCCESS     | 2023-08-06
 05:33:20+00 | Scaling job succeeded. +
               |             |                         |             |
     | New shard instance with ID 7 was created.
 1691400000000 | SPLIT_SHARD | Split Shard 5 by User | FAILED      | 2023-08-07
 09:20:00+00 | Error occurred for the add shard job 1691400000000.
               |             |                         |             |
     | Retry the command. If the issue persists, contact AWS Support.
 1691500000000 | SPLIT_SHARD | Split Shard 5 by User | CANCELED    | 2023-08-07
 09:20:00+00 | Scaling job was cancelled.
(4 rows)
```

The job status can be one of the following:

- `IN_PROGRESS` – The shard-split job has been submitted and is in progress. You can have only one job in progress at a time.
- `PENDING` – The shard-split job is waiting for you to finalize it. For more information, see Finalizing shard splits.
- `CANCELLATION_IN_PROGRESS` – The shard-split job is being canceled by the user.

- CANCELED – The shard-split job has been successfully canceled by the user or by the system.
- SUCCESS – The shard-split job completed successfully. The `message` field contains the instance ID of the new shard.
- FAILED – The shard-split job failed. The `message` field contains the details of the failure and any actions that can be taken as a followup to the failed job.

Finalizing shard splits

Finalizing is the last step of the shard-split process. It causes some downtime. If you start a shard-split job, then finalizing happens immediately after the job completes successfully.

Sometimes the system splits shards based on workload, when you've enabled system-initiated shard splits by using the `rds_aurora.limitless_enable_auto_scale` parameter.

In this case, you can choose whether finalizing happens immediately, or at a time that you choose. You use the `rds_aurora.limitless_finalize_split_shard_mode` DB cluster parameter to choose when it happens:

- If you set the value to `immediate`, it happens immediately.
- If you set the value to `user_initiated`, you have to finalize the shard-split job manually.

  An RDS event is sent to you, and the status of the shard-split job is set to `PENDING`.

When set to `user_initiated`, you use the `rds_aurora.limitless_finalize_split_shard` function to finalize the shard-split job:

```
SELECT * FROM rds_aurora.limitless_finalize_split_shard(job_id);
```

> **Note**
>
> This function applies only to shard splits that are initiated by the system, not by you.

Canceling a shard split

You can cancel a user-initiated or system-initiated shard split that's `IN_PROGRESS` or `PENDING`. You need the job ID to cancel it.

```
SELECT * from rds_aurora.limitless_cancel_shard_scale_jobs(job_id);
```

No output is returned unless there's an error. You can track the cancellation using a job-tracking query.

Adding a router to a DB shard group

You can add a router to a DB shard group.

Topics

- Prerequisites
- Adding a router
- Tracking router additions
- Canceling a router addition

Prerequisites

Adding a router has the following prerequisites:

- You must have a DB shard group.
- A user must have the `rds_aurora_limitless_cluster_admin` privilege. The `rds_superuser` has this privilege; therefore the master user also has it. The `rds_superuser` can grant the privilege to other users:

```
/* Logged in as the master user or a user with rds_superuser privileges */
CREATE USER username;
GRANT rds_aurora_limitless_cluster_admin to username;
```

> **Note**
>
> If you change your Amazon Web Services account's default CA certificate after the DB shard group is created, the new router will use the new CA certificate, which is different from the existing router's CA certificate. Depending on your trust store, some connections might fail.

- To enable system-initiated router addition, set the following DB cluster parameters in a custom DB cluster parameter group associated with your DB cluster:

Parameter	Value
rds_aurora.limitless_enable_auto_scale	on
rds_aurora.limitless_auto_scale_options	Either add_router or add_router,split_shard

For more information, see DB cluster parameter groups for Amazon Aurora DB clusters.

Adding a router

To add a router, use the `rds_aurora.limitless_add_router` function. This function starts a router-addition job that runs asynchronously.

```
SELECT rds_aurora.limitless_add_router();
```

Wait for the return of a job ID upon successful submission of the job, for example:

```
    job_id
---------------
 1691300000000
(1 row)
```

> **Note**
>
> Concurrent router addition operations are not supported. Execute operations sequentially and complete each operation before initiating another addition operation.

Tracking router additions

You can use the job ID to track a router-addition job. To describe a particular job and get more details about it, run the following query:

```
SELECT * FROM rds_aurora.limitless_list_router_scale_jobs(job_id);
```

For example:

```
SELECT * FROM rds_aurora.limitless_list_router_scale_jobs(1691300000000);

    job_id     |   action   |        job_details       | status  |    submission_time
   |                  message
---------------+------------+--------------------------+---------
+-----------------------+-------------------------------------------
 1691300000000 | ADD_ROUTER | Add 1 new Router by User | SUCCESS | 2023-08-06
 05:33:20+00 | Scaling job succeeded.                  +
               |            |                          |         |
   | New router instance with ID 7 was created.
(1 row)
```

The query returns an error when you pass a nonexistent job as the input.

```
SELECT * from rds_aurora.limitless_list_router_scale_jobs(1691300000001);

ERROR:  no job found with the job ID provided
```

You can track the status of all router-addition jobs by using the same query without a job ID, for example:

```
SELECT * FROM rds_aurora.limitless_list_router_scale_jobs();

    job_id     |   action   |        job_details       |   status    |
 submission_time     |                  message
---------------+------------+--------------------------+-------------
+-----------------------+-------------------------------------------
 1691200000000 | ADD_ROUTER | Add 1 new Router by User | IN_PROGRESS | 2023-08-05
 01:46:40+00 |
 1691300000000 | ADD_ROUTER | Add 1 new Router by User | SUCCESS     | 2023-08-06
 05:33:20+00 | Scaling job succeeded.                 +
               |            |                          |             |
       | New router instance with ID 7 was created.
 1691400000000 | ADD_ROUTER | Add 1 new Router by User | FAILED      | 2023-08-07
 09:20:00+00 | Error occurred for the add router job 1691400000000.
               |            |                          |             |
       | Retry the command. If the issue persists, contact AWS Support.
 1691500000000 | ADD_ROUTER | Add 1 new Router by User | CANCELED    | 2023-08-07
 09:20:00+00 | Scaling job was cancelled.
(4 rows)
```

The job status can be one of the following:

- `IN_PROGRESS` – The router-addition job has been submitted and is in progress. You can have only one job in progress at a time.
- `CANCELLATION_IN_PROGRESS` – The router-addition job is being canceled by the user.
- `CANCELED` – The router-addition job has been successfully canceled by the user or by the system.
- `SUCCESS` – The router-addition job completed successfully. The `message` field contains the instance ID of the new router.
- `FAILED` – The router-addition job failed. The `message` field contains the details of the failure and any actions that can be taken as a followup to the failed job.

> **Note**
>
> There's no `PENDING` status because router additions don't need to be finalized. They incur no downtime.

Canceling a router addition

You can cancel a router addition that's `IN_PROGRESS`. You need the job ID to cancel it.

```
SELECT * from rds_aurora.limitless_cancel_router_scale_jobs(job_id);
```

No output is returned unless there's an error. You can track the cancellation using a job-tracking query.

Deleting a DB shard group

You can delete a DB shard group if necessary. Deleting the DB shard group deletes the compute nodes (shards and routers), but not the storage.

Console

Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

1. Navigate to the **Databases** page.
2. Select the DB shard group that you want to delete.
3. For **Actions**, choose **Delete**.
4. Enter **`delete me`** in the box, then choose **Delete**.

The DB shard group is deleted.

Amazon CLI

To delete your DB shard group, use the `delete-db-shard-group` Amazon CLI command with the following parameter:

- `--db-shard-group-identifier` – The name of the DB shard group.

The following example deletes a DB shard group in the Aurora PostgreSQL DB cluster that you created previously.

```
aws rds delete-db-shard-group --db-shard-group-identifier my-db-shard-group
```

Adding a DB shard group to an existing Aurora PostgreSQL Limitless Database DB cluster

You can create a DB shard group in an existing DB cluster, for example if you're restoring a DB cluster or you had deleted the DB shard group.

For more information on primary DB cluster and DB shard group requirements, see Aurora PostgreSQL Limitless Database requirements and considerations.


> **Note**
>
> You can have only one DB shard group per cluster.
> The Limitless Database DB cluster must be in the `available` state before you can create a DB shard group.

Console

You can use the Amazon Web Services Management Console to add a DB shard group to an existing DB cluster.

To add a DB shard group

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Navigate to the **Databases** page.
3. Select the Limitless Database DB cluster to which you want to add a DB shard group.
4. For **Actions**, choose **Add a DB shard group**.

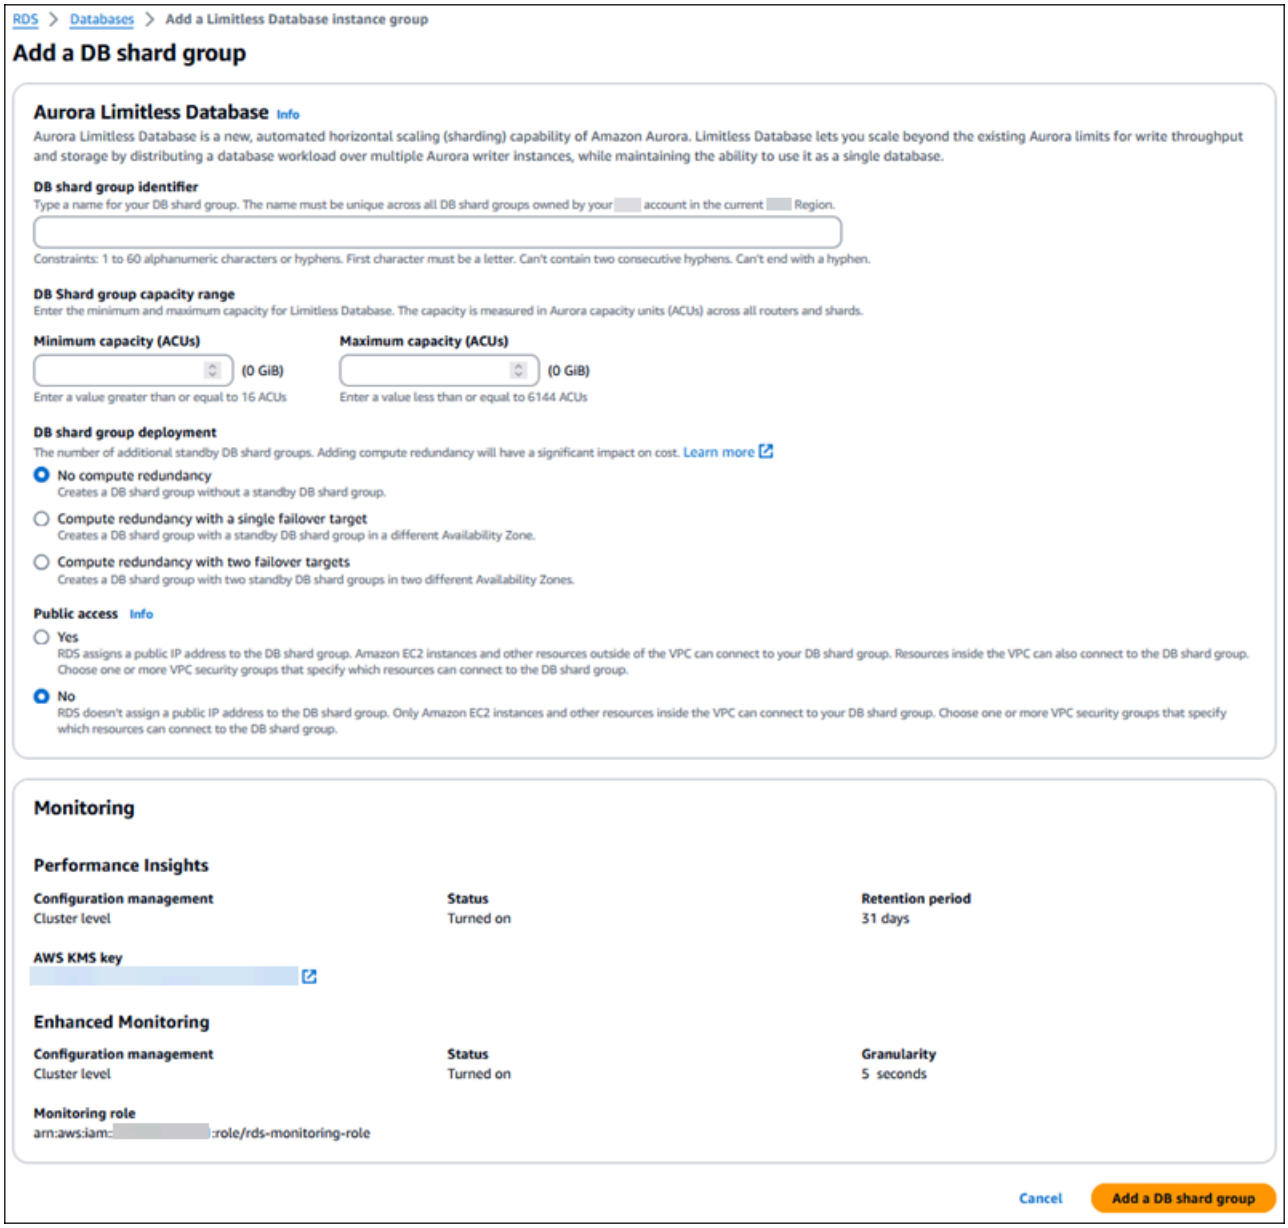

5. Enter a **DB shard group identifier**.

> **Important**
>
> After you create the DB shard group, you can't change the DB cluster identifier or the DB shard group identifier.

6. Enter the **Minimum capacity (ACUs)**. Use a value of at least 16 ACUs.
7. Enter the **Maximum capacity (ACUs)**. Use a value from 16–6144 ACUs.

For more information, see Correlating DB shard group maximum capacity with the number of routers and shards created.

8. For **DB shard group deployment**, choose whether to create standbys for the DB shard group:
   - **No compute redundancy** – Creates a DB shard group without standbys for each shard. This is the default value.
   - **Compute redundancy with a single failover target** – Creates a DB shard group with one compute standby in a different Availability Zone (AZ).
   - **Compute redundancy with two failover targets** – Creates a DB shard group with two compute standbys in two different AZs.
9. Choose whether to make the DB shard group publicly accessible.

   > **Note**
   >
   > You can't modify this setting after you create the DB shard group.

10. Choose **Add a DB shard group**.

Amazon CLI

Use the `create-db-shard-group` Amazon CLI command to create a DB shard group.

The following parameters are required:

- `--db-cluster-identifier` – The DB cluster to which the DB shard group belongs.
- `--db-shard-group-identifier` – The name of the DB shard group.

  The DB shard group identifier has the following constraints:

  - It must be unique in the Amazon Web Services account and Amazon Web Services Region where you create it.
  - It must contain 1–63 letters, numbers, or hyphens.
  - The first character must be a letter.
  - It can't end with a hyphen or contain two consecutive hyphens.

  > **Important**
  >
  > After you create the DB shard group, you can't change the DB cluster identifier or the DB shard group identifier.

- `--max-acu` – The maximum capacity of the DB shard group. Use a value from 16–6144 ACUs.

The following parameters are optional:

- `--compute-redundancy` – Whether to create standbys for the DB shard group. This parameter can have the following values:
  - `0` – Creates a DB shard group without standbys for each shard. This is the default value.
  - `1` – Creates a DB shard group with one compute standby in a different Availability Zone (AZ).
  - `2` – Creates a DB shard group with two compute standbys in two different AZs.

  > **Note**
  >
  > If you set the compute redundancy to a nonzero value, the total number of nodes will be doubled or tripled. This will incur extra costs.

- `--min-acu` – The minimum capacity of your DB shard group. It must be at least 16 ACUs, which is the default value.
- `--publicly-accessible|--no-publicly-accessible` – Whether to assign publicly accessible IP addresses to the DB shard group. Access to the DB shard group is controlled by the security groups used by the cluster.

  The default is `--no-publicly-accessible`.

  > **Note**
  >
  > You can't modify this setting after you create the DB shard group.

The following example creates a DB shard group in an Aurora PostgreSQL DB cluster.

```
aws rds create-db-shard-group \
    --db-cluster-identifier my-db-cluster \
    --db-shard-group-identifier my-new-shard-group \
    --max-acu 1000
```

The output resembles the following example.

```
{
    "Status": "CREATING",
    "Endpoint": "my-db-cluster.limitless-ckifpdyyyxxx.us-east-1.rds.amazonaws.com",
    "PubliclyAccessible": false,
    "DBClusterIdentifier": "my-db-cluster",
    "MaxACU": 1000.0,
    "DBShardGroupIdentifier": "my-new-shard-group",
    "DBShardGroupResourceId": "shardgroup-8986d309a93c4da1b1455add17abcdef",
    "ComputeRedundancy": 0
}
```

Creating Aurora PostgreSQL Limitless Database tables

There are three types of tables that contain your data in Aurora PostgreSQL Limitless Database:

- Standard – This is the default table type in Aurora PostgreSQL Limitless Database. You create standard tables using the CREATE TABLE command, and can run Data Description Language (DDL) and Data Manipulation Language (DML) operations on them.

  Standard tables aren't distributed tables. They're stored on one of the shards chosen internally by the system.
- Sharded – These tables are distributed across multiple shards. Data is split among the shards based on the values of designated columns in the table. This set of columns is called a shard key.
- Reference – These tables are replicated on all shards. They're used for infrequently modified reference data, such as product catalogs and zip codes.

  Join queries between reference and sharded tables can be run on shards, eliminating unnecessary data movement between shards and routers.

There are two ways to create limitless tables:

- Creating limitless tables by using variables – Use this method when you want to create new sharded and reference tables.
- Converting standard tables to limitless tables – Use this method when you want to convert existing standard tables into sharded and reference tables.

We also provide sample schemas for Aurora PostgreSQL Limitless Database.

Creating limitless tables by using variables

You can use variables to create sharded and reference tables by setting the table creation mode. Then the tables that you create will use this mode until you set a different mode.

Use the following variables to create sharded and reference tables:

- `rds_aurora.limitless_create_table_mode` – Set this session variable to `sharded` or `reference`. The default value of this variable is `standard`.
- `rds_aurora.limitless_create_table_shard_key` – Set this session variable to an array of column names to use as shard keys. This variable is ignored when `rds_aurora.limitless_create_table_mode` isn't `sharded`.

  Format the value as `untyped array literal`, similar to when you insert literals into an array column. For more information, see Arrays in the PostgreSQL documentation.
- `rds_aurora.limitless_create_table_collocate_with` – Set this session variable to a specific table name to collocate newly created tables with that table.

  If two or more tables are sharded using the same shard key, you can explicitly align (collocate) those tables. When two or more tables are collocated, rows from those tables with the same shard key values are placed on the same shard. Collocation helps to restrict some operations to a single shard, which results in better performance.

> **Note**
>
> All primary and unique keys must include the shard key. This means that the shard key is a subset of the primary or unique key.
> Limitless tables have some limitations. For more information, see DDL limitations and other information for Aurora PostgreSQL Limitless Database.

Topics

- Examples using variables to create limitless tables
- Aurora PostgreSQL Limitless Database table views

Examples using variables to create limitless tables

The following examples show how to use these variables to create sharded and reference tables.

Create a sharded table named `items`, with the shard key `id`.

```
BEGIN;
SET LOCAL rds_aurora.limitless_create_table_mode='sharded';
SET LOCAL rds_aurora.limitless_create_table_shard_key='{"id"}';
CREATE TABLE items(id int, val int, item text);
COMMIT;
```

Create a sharded table named `items`, with a shard key composed of the `item_id` and `item_cat` columns.

```
BEGIN;
SET LOCAL rds_aurora.limitless_create_table_mode='sharded';
SET LOCAL rds_aurora.limitless_create_table_shard_key='{"item_id", "item_cat"}';
CREATE TABLE items(item_id int, item_cat varchar, val int, item text);
COMMIT;
```

Create a sharded table named `item_description`, with a shard key composed of the `item_id` and `item_cat` columns, and collocate it with the `items` table from the previous example.

```
BEGIN;
SET LOCAL rds_aurora.limitless_create_table_mode='sharded';
SET LOCAL rds_aurora.limitless_create_table_shard_key='{"item_id", "item_cat"}';
SET LOCAL rds_aurora.limitless_create_table_collocate_with='items';
CREATE TABLE item_description(item_id int, item_cat varchar, color_id int);
COMMIT;
```

Create a reference table named `colors`.

```
BEGIN;
SET LOCAL rds_aurora.limitless_create_table_mode='reference';
CREATE TABLE colors(color_id int primary key, color varchar);
COMMIT;
```

To reset the `rds_aurora.limitless_create_table_mode` session variable to `standard`, use the following statement:

```
RESET rds_aurora.limitless_create_table_mode;
```

After you reset this variable, tables are created as standard tables, which is the default. For more information on standard tables, see Converting standard tables to limitless tables.

Aurora PostgreSQL Limitless Database table views

You can find information about Limitless Database tables by using the following views.

rds_aurora.limitless_tables

The `rds_aurora.limitless_tables` view contains information about limitless tables and their types.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_tables;

 table_gid | local_oid | schema_name | table_name  | table_status | table_type  |
 distribution_key
-----------+-----------+-------------+-------------+--------------+-------------
+------------------
         5 |     18635 | public      | standard    | active       | standard    |
         6 |     18641 | public      | ref         | active       | reference   |
         7 |     18797 | public      | orders      | active       | sharded     |
 HASH (order_id)
         2 |     18579 | public      | customer    | active       | sharded     |
 HASH (cust_id)
(4 rows)
```

rds_aurora.limitless_table_collocations

The `rds_aurora.limitless_table_collocations` view contains information about collocated sharded tables. For example, the `orders` and `customers` tables are collocated, and have the same `collocation_id`. The `users` and `followers` tables are collocated, and have the same `collocation_id`.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_table_collocations ORDER BY
 collocation_id;

 collocation_id | schema_name | table_name
----------------+-------------+------------
          16002 | public      | orders
          16002 | public      | customers
          16005 | public      | users
          16005 | public      | followers
(4 rows)
```

rds_aurora.limitless_table_collocation_distributions

The `rds_aurora.limitless_table_collocation_distributions` shows the key distribution for each collocation.

```
postgres_limitless=> SELECT * FROM
 rds_aurora.limitless_table_collocation_distributions ORDER BY collocation_id,
 lower_bound;

 collocation_id | subcluster_id |     lower_bound      |     upper_bound
----------------+---------------+----------------------+----------------------
          16002 |             6 | -9223372036854775808 | -4611686018427387904
          16002 |             5 | -4611686018427387904 |                    0
          16002 |             4 |                    0 |  4611686018427387904
          16002 |             3 |  4611686018427387904 |  9223372036854775807
          16005 |             6 | -9223372036854775808 | -4611686018427387904
          16005 |             5 | -4611686018427387904 |                    0
          16005 |             4 |                    0 |  4611686018427387904
          16005 |             3 |  4611686018427387904 |  9223372036854775807
(8 rows)
```

Converting standard tables to limitless tables

You can convert standard tables into sharded or reference tables. During the conversion, data is moved from the standard table to the distributed table, then the source standard table is deleted. Data is moved using the `INSERT INTO SELECT FROM` command.

Contents

- Creating sharded tables
- Creating collocated tables
- Creating reference tables

Creating sharded tables

You create sharded tables by running the `rds_aurora.limitless_alter_table_type_sharded` procedure on standard tables. This procedure takes a standard table and a list of columns, then distributes the given table using the list of columns as the shard key. The procedure runs synchronously, and acquires an `ACCESS EXCLUSIVE` lock on the table.

After the procedure finishes successfully, the source standard table is deleted, and a sharded table with the same name becomes available.

The `rds_aurora.limitless_alter_table_type_sharded` procedure uses the following syntax:

```
postgres=> CALL rds_aurora.limitless_alter_table_type_sharded('schema.table',
 ARRAY['shard_key1', 'shard_key2', ... 'shard_keyn']);
```

The procedure requires the following parameters:

- `schema` – The database schema that contains the table to be sharded. If the schema isn't specified, the procedure uses the `search_path`.
- `table` – The table to be sharded.
- `shard_key`*n* – An array of table columns to use as the shard key.

  Shard key values are string literals, and are therefore case sensitive. If a shard key contains a single quote ('), use another single quote to escape it. For example, if a table column is named

`customer's id`, use `customer''s id` as the shard key. Backslashes (\) and double quotes (") don't need to be escaped.

> **Note**
>
> All primary and unique keys must include the shard key. This means that the shard key is a subset of the primary or unique key.
> In sharded tables, the CHECK constraint doesn't support expressions.
> For more information, see Constraints.

To create a sharded table

The following example shows how to create the `customer` sharded table with the shard key `customer_id`.

1. Create the standard table.

```
CREATE TABLE customer (customer_id INT PRIMARY KEY NOT NULL, zipcode INT, email
 VARCHAR);
```

2. Convert the standard table to a sharded table.

```
postgres=> CALL rds_aurora.limitless_alter_table_type_sharded('public.customer',
 ARRAY['customer_id']);

postgres=> \d

                   List of relations
 Schema |     Name     |       Type        |       Owner
--------+--------------+-------------------+--------------------
 public | customer     | partitioned table | postgres_limitless
 public | customer_fs1 | foreign table     | postgres_limitless
 public | customer_fs2 | foreign table     | postgres_limitless
 public | customer_fs3 | foreign table     | postgres_limitless
 public | customer_fs4 | foreign table     | postgres_limitless
 public | customer_fs5 | foreign table     | postgres_limitless
(6 rows)
```

Creating collocated tables

If two or more tables are sharded using the same shard key, you can explicitly align (collocate) those tables. When two or more tables are collocated, rows from those tables with the same shard key values are placed on the same shard. Collocation helps to restrict some operations to a single shard, which results in better performance.

You use the `rds_aurora.limitless_alter_table_type_sharded` procedure with the following syntax:

```
postgres=> CALL
 rds_aurora.limitless_alter_table_type_sharded('schema.collocated_table',
 ARRAY['shard_key1', 'shard_key2', ... 'shard_keyn'], 'schema.sharded_table');
```

The procedure requires the following parameters:

- `schema` – The database schema that contains the tables to be collocated. If the schema isn't specified, the procedure uses the `search_path`.
- `collocated_table` – The table to be collocated.
- `shard_key`*n* – An array of table columns to use as the shard key.

  You must use the same shard key as for the original sharded table, including the same column names and column types.
- `sharded_table` – The sharded table with which you're collocating the `collocated_table`.

To create a collocated table

1. Create the first sharded table by following the procedure in Creating sharded tables.
2. Create the standard table for the collocated table.

   ```
   CREATE TABLE mytable2 (customer_id INT PRIMARY KEY NOT NULL, column1 INT, column2
    VARCHAR);
   ```
3. Convert the standard table to a collocated table.

   ```
   postgres=> CALL rds_aurora.limitless_alter_table_type_sharded('public.mytable2',
   ARRAY['customer_id'], 'public.customer');
   ```

```
postgres=> \d

                    List of relations
 Schema |     Name     |       Type        |       Owner
--------+--------------+-------------------+--------------------
 public | customer     | partitioned table | postgres_limitless
 public | customer_fs1 | foreign table     | postgres_limitless
 public | customer_fs2 | foreign table     | postgres_limitless
 public | customer_fs3 | foreign table     | postgres_limitless
 public | customer_fs4 | foreign table     | postgres_limitless
 public | customer_fs5 | foreign table     | postgres_limitless
 public | mytable2     | partitioned table | postgres_limitless
 public | mytable2_fs1 | foreign table     | postgres_limitless
 public | mytable2_fs2 | foreign table     | postgres_limitless
 public | mytable2_fs3 | foreign table     | postgres_limitless
 public | mytable2_fs4 | foreign table     | postgres_limitless
 public | mytable2_fs5 | foreign table     | postgres_limitless
(12 rows)
```

Creating reference tables

You create reference tables by running the `rds_aurora.limitless_alter_table_type_reference` procedure on standard tables. This procedure replicates a given table to all shards in the DB shard group, and changes the table type to reference. The procedure runs synchronously, and acquires an `ACCESS EXCLUSIVE` lock on the table.

After the procedure finishes successfully, the source standard table is deleted, and a reference table with the same name becomes available.

The `rds_aurora.limitless_alter_table_type_reference` procedure uses the following syntax:

```
postgres=> CALL rds_aurora.limitless_alter_table_type_reference('schema.table');
```

The stored procedure requires the following parameters:

- `schema` – The database schema that contains the table to be replicated. If the schema isn't specified, the procedure uses the `search_path`.
- `table` – The table to be replicated.

> **Note**
>
> The standard table from which you create the reference table must have a primary key.
> In reference tables, the CHECK constraint doesn't support expressions.
> The previous function, `limitless_table_alter_type_reference`, is deprecated.

To create a reference table

The following example shows how to create the `zipcodes` reference table.

1. Create the standard table.

```
CREATE TABLE zipcodes (zipcode INT PRIMARY KEY, details VARCHAR);
```

2. Convert the standard table to a reference table.

```
CALL rds_aurora.limitless_alter_table_type_reference('public.zipcodes');

postgres=> \d

                   List of relations
 Schema |     Name     |       Type        |       Owner
--------+--------------+-------------------+--------------------
 public | customer     | partitioned table | postgres_limitless
 public | customer_fs1 | foreign table     | postgres_limitless
 public | customer_fs2 | foreign table     | postgres_limitless
 public | customer_fs3 | foreign table     | postgres_limitless
 public | customer_fs4 | foreign table     | postgres_limitless
 public | customer_fs5 | foreign table     | postgres_limitless
 public | zipcodes     | foreign table     | postgres_limitless
(7 rows)
```

   The output shows the `customer` sharded table and the `zipcodes` reference table.

Aurora PostgreSQL Limitless Database sample schemas

We provide the following sample schemas for Aurora PostgreSQL Limitless Database:

- Limitless E-Commerce sample schema

- Limitless pgbench

You can use these schemas to quickly create a sample database and load data into Aurora PostgreSQL Limitless Database tables. For more information, see the GitHub repository.

Loading data into Aurora PostgreSQL Limitless Database

You can load data into Aurora PostgreSQL Limitless Database tables by using the `COPY` command or by using the data loading utility.

> **Note**
>
> You can load data into standard, sharded, and reference tables.

Contents

- Using the COPY command with Aurora PostgreSQL Limitless Database
  - Using the COPY command to load data into Aurora PostgreSQL Limitless Database
    - Splitting data into multiple files
  - Using the COPY command to copy Limitless Database data to a file
- Using the Aurora PostgreSQL Limitless Database data loading utility
  - Limitations
  - Prerequisites
  - Preparing the source database
  - Preparing the destination database
  - Creating database credentials
    - Create the source database credentials
    - Create the destination database credentials
  - Setting up database authentication and resource access using a script
    - Setup script for the data loading utility
    - Output from the data loading utility setup script
    - Cleaning up failed resources
  - Setting up database authentication and resource access manually
    - Creating the customer-managed Amazon KMS key
    - Creating the database secrets
    - Creating the IAM role
    - Updating the customer-managed Amazon KMS key
    - Adding the IAM role permission policies

- Loading data from an Aurora PostgreSQL DB cluster or RDS for PostgreSQL DB instance
- Monitoring data loading
  - Listing data loading jobs
  - Viewing details of data loading jobs using the job ID
  - Monitoring the Amazon CloudWatch log group
  - Monitoring RDS events
- Canceling data loading

Using the COPY command with Aurora PostgreSQL Limitless Database

You can use the \copy functionality in the psql utility for importing data into and exporting data from Aurora PostgreSQL Limitless Database

Using the COPY command to load data into Aurora PostgreSQL Limitless Database

Aurora PostgreSQL Limitless Database is compatible with the \copy functionality in the psql utility for importing data.

In Limitless Database as in Aurora PostgreSQL, the following aren't supported:

- Direct SSH access to DB instances – You can't copy a data file (such as in .csv format) to the DB instance host and run COPY from the file.
- Using local files on the DB instance – Use COPY ... FROM STDIN and COPY ... TO STDOUT.

The COPY command in PostgreSQL has options for working with local files (FROM/TO) and transmitting data using a connection between the client and the server (STDIN/STDOUT). For more information, see COPY in the PostgreSQL documentation.

The \copy command in the PostgreSQL psql utility works with local files on the computer where you run the psql client. It invokes the respective COPY ... FROM STDIN or COPY ... FROM STDOUT command on the remote (for example, Limitless Database) server to which you connect. It reads data from the local file to STDIN or writes to it from STDOUT.

Splitting data into multiple files

Data is stored on multiple shards in Aurora PostgreSQL Limitless Database. To speed up data loading using \copy, you can split your data into multiple files. Then import independently for each data file by running separate \copy commands in parallel.

For example, you have an input data file in CSV format with 3 million rows to import. You can split the file into chunks each holding 200,000 rows (15 chunks):

```
split -l200000 data.csv data_ --additional-suffix=.csv -d
```

This results in files data_00.csv through data_14.csv. You can then import data using 15 parallel \copy commands, for example:

```
psql -h dbcluster.limitless-111122223333.aws-region.rds.amazonaws.com -U username -c
 "\copy test_table from '/tmp/data_00.csv';" postgres_limitless &
psql -h dbcluster.limitless-111122223333.aws-region.rds.amazonaws.com -U username -c
 "\copy test_table FROM '/tmp/data_01.csv';" postgres_limitless &
...
psql -h dbcluster.limitless-111122223333.aws-region.rds.amazonaws.com -U username -c
 "\copy test_table FROM '/tmp/data_13.csv';" postgres_limitless &
psql -h dbcluster.limitless-111122223333.aws-region.rds.amazonaws.com -U username -c
 "\copy test_table FROM '/tmp/data_14.csv';" postgres_limitless
```

Using this technique, the same amount of data is imported approximately 10 times faster than using a single \copy command.

Using the COPY command to copy Limitless Database data to a file

You can use the \copy command to copy data from a limitless table to a file, as shown in the following example:

```
postgres_limitless=> \copy test_table TO '/tmp/test_table.csv' DELIMITER ',' CSV
 HEADER;
```

Using the Aurora PostgreSQL Limitless Database data loading utility

Aurora provides a utility for loading data directly into Limitless Database from an Aurora PostgreSQL DB cluster or RDS for PostgreSQL DB instance.

You perform the following steps to use the data loading utility:

1. Prerequisites
2. Preparing the source database
3. Preparing the destination database
4. Creating database credentials
5. One of the following:
   - Setting up database authentication and resource access using a script (recommended)
   - Setting up database authentication and resource access manually
6. Loading data from an Aurora PostgreSQL DB cluster or RDS for PostgreSQL DB instance

Limitations

The data loading utility has the following limitations:

- The following data types aren't supported: `enum`, `ARRAY`, `BOX`, `CIRCLE`, `LINE`, `LSEG`, `PATH`, `PG_LSN`, `PG_SNAPSHOT`, `POLYGON`, `TSQUERY`, `TSVECTOR`, and `TXID_SNAPSHOT`.
- Leading zeroes (`0`) are stripped from the `VARBIT` data type during loading.
- Data migration fails when there are foreign keys on the destination tables.
- Limitless Data Utility supports the following source configurations for Amazon RDS for PostgreSQL Multi-AZ DB clusters:
  - Primary instance
    - Supported modes: snapshot, snapshot_then_cdc
  - Replica instance
    - Supported mode: snapshot only
      - Requirement: hot_standby_feedback must be enabled
    - Not supported: snapshot_then_cdc

Prerequisites

The data loading utility has the following prerequisites:

- The source database uses Aurora PostgreSQL or RDS for PostgreSQL version 11.x and higher.
- The source database is in the same Amazon Web Services account and Amazon Web Services Region as the destination DB shard group.
- The source DB cluster or DB instance is in the `available` state.
- Tables on the source database and limitless database have the same table names, column names, and column data types.
- The source and destination tables have primary keys that use the same columns and column orders.
- You must have an environment for connecting to a limitless database to run data loading commands. Available commands are the following:
  - `rds_aurora.limitless_data_load_start`
  - `rds_aurora.limitless_data_load_cancel`
- For CDC:
  - Both the source database and the destination DB shard group must use the same DB subnet group, VPC security group, and database port. These setups are for network connections to both the source database and the routers in the DB shard group.
  - You must enable logical replication on the source database. The source database user must have privileges to read logical replication.

Preparing the source database

To access the source database for data loading, you must allow incoming network traffic to it. Perform the following steps.

To allow network traffic to the source database

1. Sign in to the Amazon Web Services Management Console and open the Amazon EC2 console at https://console.amazonaws.cn/ec2/.
2. Navigate to the **Security groups** page.
3. Choose the **Security group ID** for the security group used by the source DB cluster or instance.


   For example, its security group ID is `sg-056a84f1712b77926`.

4. On the **Inbound rules** tab:

   a. Choose **Edit inbound rules**.

   b. Add a new inbound rule for the source DB cluster or instance:

   - Port range – Database port for the source database, usually `5432`
   - Security group ID – `sg-056a84f1712b77926` in this example

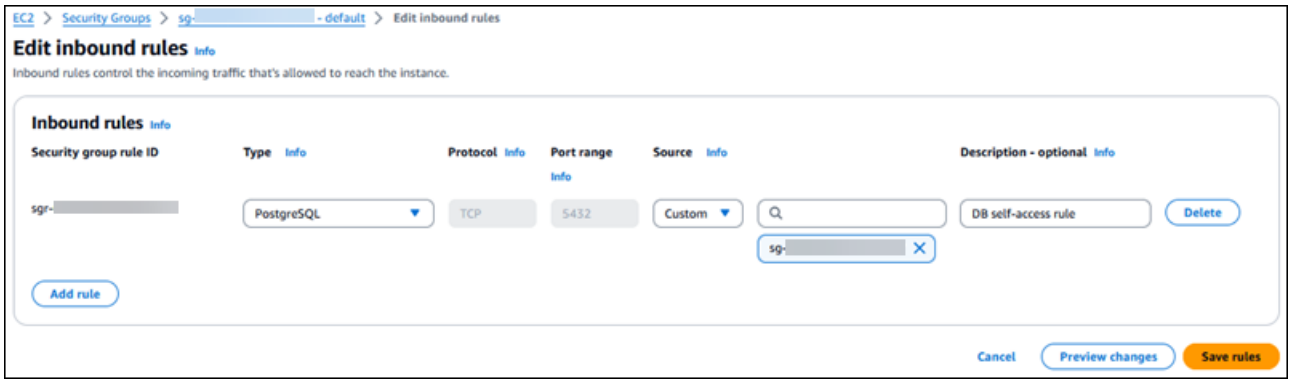


5. On the **Outbound rules** tab:

   a. Choose **Edit outbound rules**.

   b. Add a new outbound rule for the source DB cluster or instance:

   - Database port – `All traffic` (includes ports `0-65535`)
   - Security group ID – `sg-056a84f1712b77926` in this example

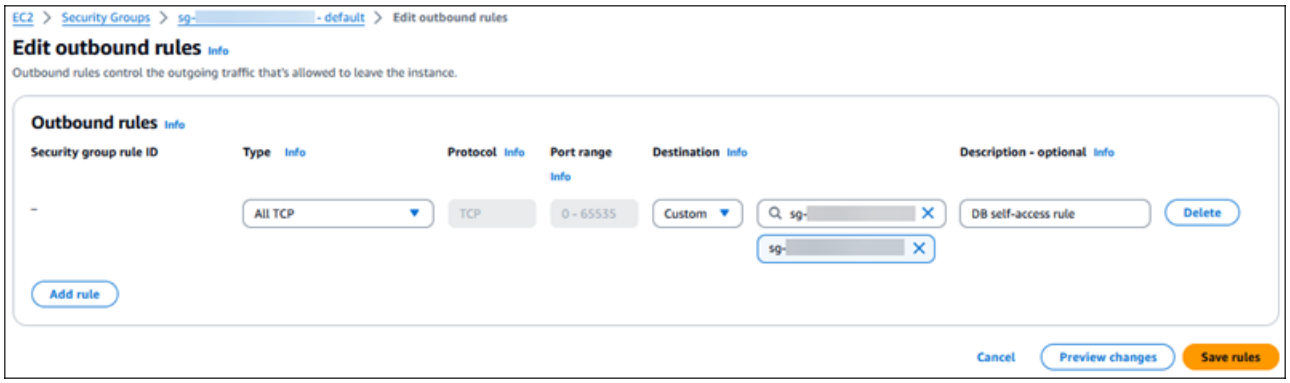

6. Sign in to the Amazon Web Services Management Console and open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

7. Navigate to the **Network ACLs** page.

8. Add the default network ACL configuration as outlined in Default network ACL.

Preparing the destination database

Follow the procedures in Creating Aurora PostgreSQL Limitless Database tables to create the destination tables in the DB shard group.

Your destination tables must have the same schemas, table names, and primary keys as the source tables.

Creating database credentials

You must create database users in the source and destination databases, and grant necessary privileges to the users. For more information, see CREATE USER and GRANT in the PostgreSQL documentation.

Create the source database credentials

The source database user is passed in the command to start loading. This user must have privileges to perform replication from the source database.

1. Use the database master user (or another user with the `rds_superuser` role) to create a source database user with `LOGIN` privileges.

```
CREATE USER source_db_username WITH PASSWORD 'source_db_user_password';
```

2. Grant the `rds_superuser` role to your source database user.

```
GRANT rds_superuser to source_db_username;
```

3. If you're using `full_load_and_cdc` mode, grant the `rds_replication` role to your source database user. The `rds_replication` role grants permissions to manage logical slots and to stream data using logical slots.

```
GRANT rds_replication to source_db_username;
```

Create the destination database credentials

The destination database user must have permission to write to the destination tables in the DB shard group.

1. Use the database master user (or another user with the `rds_superuser` role) to create a destination database user with `LOGIN` privileges.

```
CREATE USER destination_db_username WITH PASSWORD 'destination_db_user_password';
```

2. Grant the `rds_superuser` role to your destination database user.

```
GRANT rds_superuser to destination_db_username;
```

Setting up database authentication and resource access using a script

The setup script creates one customer-managed Amazon KMS key, one Amazon Identity and Access Management (IAM) role, and two Amazon Secrets Manager secrets.

Perform the following steps to use the setup script:

1. Make sure that you have the Amazon CLI installed and configured with your Amazon Web Services account credentials.
2. Install the `jq` command-line JSON processor. For more information, see jqlang/jq.
3. Copy the data_loading_script.zip file to your computer, and extract the `data_load_aws_setup_script.sh` file from it.
4. Edit the script to replace the placeholder variables with the appropriate values for the following:
   - Your Amazon Web Services account
   - The Amazon Web Services Region
   - Source database credentials
   - Destination database credentials
5. Open a new terminal on your computer and run the following command:

```
bash ./data_load_aws_setup_script.sh
```

Setup script for the data loading utility

We provide the text of the `data_load_aws_setup_script.sh` file here for reference.

```
#!/bin/bash
# Aurora Limitless data loading - AWS resources setup script #
# Set up the account credentials in advance. #
# Update the following script variables. #

###################################
#### Start of variable section ####

ACCOUNT_ID="12-digit_AWS_account_ID"
REGION="AWS_Region"
DATE=$(date +'%m%d%H%M%S')
RANDOM_SUFFIX="${DATE}"
SOURCE_SECRET_NAME="secret-source-${DATE}"
```

```
SOURCE_USERNAME="source_db_username"
SOURCE_PASSWORD="source_db_password"
DESTINATION_SECRET_NAME="secret-destination-${DATE}"
DESTINATION_USERNAME="destination_db_username"
DESTINATION_PASSWORD="destination_db_password"
DATA_LOAD_IAM_ROLE_NAME="aurora-data-loader-${RANDOM_SUFFIX}"
TMP_WORK_DIR="./tmp_data_load_aws_resource_setup/"

#### End of variable section ####
################################

# Main logic start
echo "DATE - [${DATE}]"
echo "RANDOM_SUFFIX - [${RANDOM_SUFFIX}]"
echo 'START!'

mkdir -p $TMP_WORK_DIR

# Create the symmetric KMS key for encryption and decryption.
TMP_FILE_PATH="${TMP_WORK_DIR}tmp_create_key_response.txt"
aws kms create-key --region $REGION | tee $TMP_FILE_PATH
KMS_KEY_ARN=$(cat $TMP_FILE_PATH | jq -r '.KeyMetadata.Arn')
aws kms create-alias \
    --alias-name alias/"${DATA_LOAD_IAM_ROLE_NAME}-key" \
    --target-key-id $KMS_KEY_ARN \
    --region $REGION

# Create the source secret.
TMP_FILE_PATH="${TMP_WORK_DIR}tmp_create_source_secret_response.txt"
aws secretsmanager create-secret \
    --name $SOURCE_SECRET_NAME \
    --kms-key-id $KMS_KEY_ARN \
    --secret-string "{\"username\":\"$SOURCE_USERNAME\",\"password\":\"$SOURCE_PASSWORD
\"}" \
    --region $REGION \
    | tee $TMP_FILE_PATH
SOURCE_SECRET_ARN=$(cat $TMP_FILE_PATH | jq -r '.ARN')

# Create the destination secret.
TMP_FILE_PATH="${TMP_WORK_DIR}tmp_create_destination_secret_response.txt"
aws secretsmanager create-secret \
    --name $DESTINATION_SECRET_NAME \
    --kms-key-id $KMS_KEY_ARN \
```

```
    --secret-string "{\"username\":\"$DESTINATION_USERNAME\",\"password\":
\"$DESTINATION_PASSWORD\"}" \
    --region $REGION \
    | tee $TMP_FILE_PATH
DESTINATION_SECRET_ARN=$(cat $TMP_FILE_PATH | jq -r '.ARN')

# Create the RDS trust policy JSON file.
# Use only rds.amazonaws.com for RDS PROD use cases.
TRUST_POLICY_PATH="${TMP_WORK_DIR}rds_trust_policy.json"
echo '{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Principal": {
                "Service": [
                    "rds.amazonaws.com"
                ]
            },
            "Action": "sts:AssumeRole"
        }
    ]
}' > $TRUST_POLICY_PATH

# Create the IAM role.
TMP_FILE_PATH="${TMP_WORK_DIR}tmp_create_iam_role_response.txt"
aws iam create-role \
    --role-name $DATA_LOAD_IAM_ROLE_NAME \
    --assume-role-policy-document "file://${TRUST_POLICY_PATH}" \
    --tags Key=assumer,Value=aurora_limitless_table_data_load \
    --region $REGION \
    | tee $TMP_FILE_PATH
IAM_ROLE_ARN=$(cat $TMP_FILE_PATH | jq -r '.Role.Arn')

# Create the permission policy JSON file.
PERMISSION_POLICY_PATH="${TMP_WORK_DIR}data_load_permission_policy.json"
permission_json_policy=$(cat &lt;&lt;EOF
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "Ec2Permission",
            "Effect": "Allow",
            "Action": [
```

```
                "ec2:DescribeNetworkInterfaces",
                "ec2:CreateNetworkInterface",
                "ec2:DeleteNetworkInterface",
                "ec2:CreateNetworkInterfacePermission",
                "ec2:DeleteNetworkInterfacePermission",
                "ec2:DescribeNetworkInterfacePermissions",
                "ec2:ModifyNetworkInterfaceAttribute",
                "ec2:DescribeNetworkInterfaceAttribute",
                "ec2:DescribeAvailabilityZones",
                "ec2:DescribeRegions",
                "ec2:DescribeVpcs",
                "ec2:DescribeSubnets",
                "ec2:DescribeSecurityGroups",
                "ec2:DescribeNetworkAcls"
            ],
            "Resource": "*"
        },
        {
            "Sid": "SecretsManagerPermissions",
            "Effect": "Allow",
            "Action": [
                "secretsmanager:GetSecretValue",
                "secretsmanager:DescribeSecret"
            ],
            "Resource": [
                "$SOURCE_SECRET_ARN",
                "$DESTINATION_SECRET_ARN"
            ]
        },
        {
            "Sid": "KmsPermissions",
            "Effect": "Allow",
            "Action": [
                "kms:Decrypt",
                "kms:DescribeKey",
                "kms:GenerateDataKey"
            ],
            "Resource": "$KMS_KEY_ARN"
        },
        {
            "Sid": "RdsPermissions",
            "Effect": "Allow",
            "Action": [
                "rds:DescribeDBClusters",
```

```
                "rds:DescribeDBInstances"
            ],
            "Resource": "*"
        }
    ]
}
EOF
)
echo $permission_json_policy > $PERMISSION_POLICY_PATH

# Add the inline policy.
aws iam put-role-policy \
    --role-name $DATA_LOAD_IAM_ROLE_NAME \
    --policy-name aurora-limitless-data-load-policy \
    --policy-document "file://${PERMISSION_POLICY_PATH}" \
    --region $REGION

# Create the key policy JSON file.
KEY_POLICY_PATH="${TMP_WORK_DIR}data_load_key_policy.json"
key_json_policy=$(cat &lt;&lt;EOF
{
    "Id": "key-aurora-limitless-data-load-$RANDOM_SUFFIX",
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "Enable IAM User Permissions",
            "Effect": "Allow",
            "Principal": {
                "AWS": "arn:aws:iam::$ACCOUNT_ID:root"
            },
            "Action": "kms:*",
            "Resource": "*"
        },
        {
            "Sid": "Allow use of the key",
            "Effect": "Allow",
            "Principal": {
                "AWS": "$IAM_ROLE_ARN"
            },
            "Action": [
                "kms:Decrypt",
                "kms:DescribeKey",
                "kms:GenerateDataKey"
            ],
```

```
            "Resource": "*"
        }
    ]
}
EOF
)
echo $key_json_policy > $KEY_POLICY_PATH

# Add the key policy.
TMP_FILE_PATH="${TMP_WORK_DIR}tmp_put_key_policy_response.txt"
sleep 10 # sleep 10 sec for IAM role ready
aws kms put-key-policy \
    --key-id $KMS_KEY_ARN \
    --policy-name default \
    --policy "file://${KEY_POLICY_PATH}" \
    --region $REGION \
    | tee $TMP_FILE_PATH

echo 'DONE!'

echo "ACCOUNT_ID : [${ACCOUNT_ID}]"
echo "REGION : [${REGION}]"
echo "RANDOM_SUFFIX : [${RANDOM_SUFFIX}]"
echo "IAM_ROLE_ARN : [${IAM_ROLE_ARN}]"
echo "SOURCE_SECRET_ARN : [${SOURCE_SECRET_ARN}]"
echo "DESTINATION_SECRET_ARN : [${DESTINATION_SECRET_ARN}]"

# Example of a successful run:
# ACCOUNT_ID : [012345678912]
# REGION : [ap-northeast-1]
# RANDOM_SUFFIX : [0305000703]
# IAM_ROLE_ARN : [arn:aws:iam::012345678912:role/aurora-data-loader-0305000703]
# SOURCE_SECRET_ARN : [arn:aws:secretsmanager:ap-
northeast-1:012345678912:secret:secret-source-0305000703-yQDtow]
# DESTINATION_SECRET_ARN : [arn:aws:secretsmanager:ap-
northeast-1:012345678912:secret:secret-destination-0305000703-5d5Jy8]

# If you want to manually clean up failed resource,
# please remove them in the following order:
# 1. IAM role.
 # aws iam delete-role-policy --role-name Test-Role --policy-name ExamplePolicy --
region us-east-1
# aws iam delete-role --role-name Test-Role --region us-east-1
# 2. Source and destination secrets.
```

```
# aws secretsmanager delete-secret --secret-id MyTestSecret --force-delete-without-
recovery --region us-east-1
# 3. KDM key.
# aws kms schedule-key-deletion --key-id arn:aws:kms:us-
east-1:123456789012:key/1234abcd-12ab-34cd-56ef-1234567890ab --pending-window-in-days 7
 --region us-east-1
```

Output from the data loading utility setup script

The following example shows the output from a successful run of the script.

```
% bash ./data_load_aws_setup_script.sh
DATE - [0305000703]
RANDOM_SUFFIX - [0305000703]
START!
{
    "KeyMetadata": {
        "AWSAccountId": "123456789012",
        "KeyId": "1234abcd-12ab-34cd-56ef-1234567890ab",
        "Arn": "arn:aws:kms:ap-
northeast-1:123456789012:key/1234abcd-12ab-34cd-56ef-1234567890ab",
        "CreationDate": "2024-03-05T00:07:49.852000+00:00",
        "Enabled": true,
        "Description": "",
        "KeyUsage": "ENCRYPT_DECRYPT",
        "KeyState": "Enabled",
        "Origin": "AWS_KMS",
        "KeyManager": "CUSTOMER",
        "CustomerMasterKeySpec": "SYMMETRIC_DEFAULT",
        "KeySpec": "SYMMETRIC_DEFAULT",
        "EncryptionAlgorithms": [
            "SYMMETRIC_DEFAULT"
        ],
        "MultiRegion": false
    }
}
{
    "ARN": "arn:aws:secretsmanager:ap-northeast-1:123456789012:secret:secret-
source-0305000703-yQDtow",
    "Name": "secret-source-0305000703",
    "VersionId": "a017bebe-a71b-4220-b923-6850c2599c26"
}
{
```

```
    "ARN": "arn:aws:secretsmanager:ap-northeast-1:123456789012:secret:secret-
destination-0305000703-5d5Jy8",
    "Name": "secret-destination-0305000703",
    "VersionId": "32a1f989-6391-46b1-9182-f65d242f5eb6"
}
{
    "Role": {
        "Path": "/",
        "RoleName": "aurora-data-loader-0305000703",
        "RoleId": "AROAYPX63ITQOYORQSC6U",
        "Arn": "arn:aws:iam::123456789012:role/aurora-data-loader-0305000703",
        "CreateDate": "2024-03-05T00:07:54+00:00",
        "AssumeRolePolicyDocument": {
           "Version": "2012-10-17",
            "Statement": [
                {
                    "Effect": "Allow",
                    "Principal": {
                        "Service": [
                            "rds.amazonaws.com"
                        ]
                    },
                    "Action": "sts:AssumeRole"
                }
            ]
        },
        "Tags": [
            {
                "Key": "assumer",
                "Value": "aurora_limitless_table_data_load"
            }
        ]
    }
}
DONE!
ACCOUNT_ID : [123456789012]
REGION : [ap-northeast-1]
RANDOM_SUFFIX : [0305000703]
IAM_ROLE_ARN : [arn:aws:iam::123456789012:role/aurora-data-loader-0305000703]
SOURCE_SECRET_ARN : [arn:aws:secretsmanager:ap-northeast-1:123456789012:secret:secret-
source-0305000703-yQDtow]
DESTINATION_SECRET_ARN : [arn:aws:secretsmanager:ap-
northeast-1:123456789012:secret:secret-destination-0305000703-5d5Jy8]
```

Cleaning up failed resources

If you want to clean up failed resources manually, remove them in the following order:

1. IAM role, for example:

```
aws iam delete-role-policy \
--role-name Test-Role \
--policy-name ExamplePolicy

aws iam delete-role \
--role-name Test-Role
```

2. Source and destination secrets, for example:

```
aws secretsmanager delete-secret \
--secret-id MyTestSecret \
--force-delete-without-recovery
```

3. KMS key, for example:

```
aws kms schedule-key-deletion \
--key-id arn:aws-cn:kms:us-
west-2:123456789012:key/1234abcd-12ab-34cd-56ef-1234567890ab \
--pending-window-in-days 7
```

Then you can retry the script.

Setting up database authentication and resource access manually

The manual process for setting up database authentication and resource access has the following steps:

1. Creating the customer-managed Amazon KMS key
2. Adding the IAM role permission policies
3. Creating the database secrets
4. Creating the IAM role
5. Updating the customer-managed Amazon KMS key

This process is optional, and performs the same tasks as in Setting up database authentication and resource access using a script. We recommend using the script.

Creating the customer-managed Amazon KMS key

Follow the procedures in Creating symmetric encryption keys to create a customer-managed KMS key. You can also use an existing key if it meets these requirements.

To create a customer-managed KMS key

1. Sign in to the Amazon Web Services Management Console and open the Amazon KMS console at https://console.amazonaws.cn/kms.
2. Navigate to the **Customer managed keys** page.
3. Choose **Create key**.
4. On the **Configure key** page:
    a. For **Key type**, select **Symmetric**.
    b. For **Key usage**, select **Encrypt and decrypt**.
    c. Choose **Next**.
5. On the **Add labels** page, enter an **Alias** such as **`limitless`**, then choose **Next**.
6. On the **Define key administrative permissions** page, make sure that the **Allow key administrators to delete this key** check box is selected, then choose **Next**.
7. On the **Define key usage permissions** page, choose **Next**.
8. On the **Review** page, choose **Finish**.

You update the key policy later.

Record the Amazon Resource Names (ARN) of the KMS key to use in Adding the IAM role permission policies.

For information on using the Amazon CLI to create the customer-managed KMS key, see create-key and create-alias.

Creating the database secrets

To allow the data loading utility to access the source and destination database tables, you create two secrets in Amazon Secrets Manager: one for the source database and one for the destination database. These secrets store the usernames and passwords for accessing the source and destination databases.

Follow the procedures in Create an Amazon Secrets Manager secret to create the key-value pair secrets.

To create the database secrets

1. Open the Secrets Manager console at https://console.amazonaws.cn/secretsmanager/.
2. Choose **Store a new secret**.
3. On the **Choose secret type** page:
   a. For **Secret type**, select **Other type of secret**.
   b. For **Key/value pairs**, choose the **Plaintext** tab.
   c. Enter the following JSON code, where *sourcedbreader* and *sourcedbpassword* are the credentials for the source database user from Create the source database credentials.

```
{
    "username":"sourcedbreader",
    "password":"sourcedbpassword"
}
```

   d. For **Encryption key**, choose the KMS key that you created in Creating the customer-managed Amazon KMS key, for example `limitless`.
   e. Choose **Next**.

4. On the **Configure secret** page, enter a **Secret name**, such as **`source_DB_secret`**, then choose **Next**.
5. On the **Configure rotation - *optional*** page, choose **Next**.
6. On the **Review** page, choose **Store**.
7. Repeat the procedure for the destination database secret:

    a. Enter the following JSON code, where *`destinationdbwriter`* and *`destinationdbpassword`* are the credentials for the destination database user from Create the destination database credentials.

    ```
    {
        "username":"destinationdbwriter",
        "password":"destinationdbpassword"
    }
    ```

    b. Enter a **Secret name**, such as **`destination_DB_secret`**.

Record the ARNs of the secrets to use in Adding the IAM role permission policies.

Creating the IAM role

Data loading requires you to provide access to Amazon resources. To provide access, you create the `aurora-data-loader` IAM role by following the procedures in Creating a role to delegate permissions to an IAM user.

To create the IAM role

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. Navigate to the **Roles** page.
3. Choose **Create role**.
4. On the **Select trusted entity** page:

    a. For **Trusted entity type**, select **Custom trust policy**.

    b. Enter the following JSON code for the custom trust policy:

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Principal": {
                "Service": [
                    "rds.amazonaws.com"
                ]
            },
            "Action": "sts:AssumeRole"
        }
    ]
}
```

c. Choose **Next**.

5. On the **Add permissions** page, choose **Next**.
6. On the **Name, review, and create** page:

   a. For **Role name**, enter **`aurora-data-loader`** or another name that you prefer.

   b. Choose **Add tag**, and enter the following tag:

   - **Key**: **`assumer`**
   - **Value**: **`aurora_limitless_table_data_load`**

   > **Important**
   >
   > The Aurora PostgreSQL Limitless Database can only assume an IAM role that has this tag.

   c. Choose **Create role**.

Updating the customer-managed Amazon KMS key

Follow the procedures in Changing a key policy to add the IAM role `aurora-data-loader` to the default key policy.

To add the IAM role to the key policy

1. Sign in to the Amazon Web Services Management Console and open the Amazon KMS console at https://console.amazonaws.cn/kms.
2. Navigate to the **Customer managed keys** page.
3. Choose the KMS key that you created in Creating the customer-managed Amazon KMS key, for example `limitless`.
4. On the **Key policy** tab, for **Key users**, choose **Add**.
5. In the **Add key users** window, select the name of the IAM role that you created in Creating the IAM role, for example **aurora-data-loader**.
6. Choose **Add**.

Adding the IAM role permission policies

You must add permission policies to the IAM role that you created. This allows the Aurora PostgreSQL Limitless Database data loading utility to access related Amazon resources for building network connections and retrieving the source and destination DB credential secrets.

For more information, see Modifying a role.

To add the permission policies

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. Navigate to the **Roles** page.
3. Choose the IAM role that you created in Creating the IAM role, for example **aurora-data-loader**.
4. On the **Permissions** tab, for **Permissions policies** choose **Add permissions**, then **Create inline policy**.
5. On the **Specify permissions** page, choose the **JSON** editor.
6. Copy and paste the following template into the JSON editor, replacing the placeholders with the ARNs for your database secrets and KMS key.

   JSON

```
{
```

```
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "Ec2Permission",
            "Effect": "Allow",
            "Action": [
                "ec2:DescribeNetworkInterfaces",
                "ec2:CreateNetworkInterface",
                "ec2:DeleteNetworkInterface",
                "ec2:CreateNetworkInterfacePermission",
                "ec2:DeleteNetworkInterfacePermission",
                "ec2:DescribeNetworkInterfacePermissions",
                "ec2:ModifyNetworkInterfaceAttribute",
                "ec2:DescribeNetworkInterfaceAttribute",
                "ec2:DescribeAvailabilityZones",
                "ec2:DescribeRegions",
                "ec2:DescribeVpcs",
                "ec2:DescribeSubnets",
                "ec2:DescribeSecurityGroups",
                "ec2:DescribeNetworkAcls"
            ],
            "Resource": "*"
        },
        {
            "Sid": "SecretsManagerPermissions",
            "Effect": "Allow",
            "Action": [
                "secretsmanager:GetSecretValue",
                "secretsmanager:DescribeSecret"
            ],
            "Resource": [
                "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:source_DB_secret-ABC123",
                "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:destination_DB_secret-456DEF"
            ]
        },        {
            "Sid": "KmsPermissions",
            "Effect": "Allow",
            "Action": [
                "kms:Decrypt",
                "kms:DescribeKey",
                "kms:GenerateDataKey"
            ],
```

```
            "Resource": "arn:aws-cn:kms:us-east-1:123456789012:key/aa11bb22-
####-####-####-fedcba123456"
        },
        {
            "Sid": "RdsPermissions",
            "Effect": "Allow",
            "Action": [
                "rds:DescribeDBClusters",
                "rds:DescribeDBInstances"
            ],
            "Resource": "*"
        }
    ]
}
```

7. Check for errors and correct them.
8. Choose **Next**.
9. On the **Review and create** page, enter a **Policy name** such as **`data_loading_policy`**, then choose **Create policy**.

Loading data from an Aurora PostgreSQL DB cluster or RDS for PostgreSQL DB instance

After you complete the resource and authentication setup, connect to the cluster endpoint and call the `rds_aurora.limitless_data_load_start` stored procedure from a limitless database, such as `postgres_limitless`. The limitless database is a database on the DB shard group into which you want to migrate data.

This function connects asynchronously in the background to the source database specified in the command, reads the data from the source, and loads the data onto the shards. For better performance, the data is loaded using parallel threads. The function retrieves a point-in-time table snapshot by running a `SELECT` command to read the data of the table(s) provided in the command.

You can load data into sharded, reference, and standard tables.

You can load data at the database, schema, or table level in `rds_aurora.limitless_data_load_start` calls.

- Database – You can load one database at a time in each call, with no limit on the schema or table count within the database.
- Schema – You can load a maximum of 15 schemas in each call, with no limit on the table count within each schema.
- Table – You can load a maximum of 15 tables in each call.

> **Note**
>
> This feature doesn't use Amazon RDS snapshots or point-in-time isolation of the database. For consistency across tables, we recommend cloning the source database and pointing to that cloned database as the source.

The stored procedure uses the following syntax:

```
CALL rds_aurora.limitless_data_load_start('source_type',
    'source_DB_cluster_or_instance_ID',
    'source_database_name',
    'streaming_mode',
    'data_loading_IAM_role_arn',
    'source_DB_secret_arn',
    'destination_DB_secret_arn',
    'ignore_primary_key_conflict_boolean_flag',
    'is_dry_run',
    (optional parameter) schemas/tables => ARRAY['name1', 'name2', ...]);
```

The input parameters are the following:

- `source_type` – The source type: `aurora_postgresql` or `rds_postgresql`
- `source_DB_cluster_or_instance_ID` – The source Aurora PostgreSQL DB cluster identifier or RDS for PostgreSQL DB instance identifier
- `source_database_name` – The source database name, such as *`postgres`*
- `streaming_mode` – Whether to include change data capture (CDC): `full_load` or `full_load_and_cdc`
- `data_loading_IAM_role_arn` – The IAM role Amazon Resource Name (ARN) for `aurora-data-loader`
- `source_DB_secret_arn` – The source DB secret ARN
- `destination_DB_secret_arn` – The destination DB secret ARN
- `ignore_primary_key_conflict_boolean_flag` – Whether to continue if a primary key conflict occurs:
  - If set to `true`, data loading ignores new changes for rows with a primary key conflict.
  - If set to `false`, data loading overwrites the existing rows on destination tables when it encounters a primary key conflict.
- `is_dry_run` – Whether to test that the data loading job can connect to the source and destination databases:
  - If set to `true`, tests the connections without loading data
  - If set to `false`, loads the data
- (optional) `schemas` or `tables` – An array of schemas or tables to load. You can specify either of the following:

- A list of tables in the format `tables => ARRAY['schema1.table1', 'schema1.table2', 'schema2.table1', ...]`
- A list of schemas in the format `schemas => ARRAY['schema1', 'schema2', ...]`

If you don't include this parameter, the entire specified source database is migrated.

The output parameter is the job ID with a message.

The following example shows how to use the `rds_aurora.limitless_data_load_start` stored procedure to load data from an Aurora PostgreSQL DB cluster.

```
CALL rds_aurora.limitless_data_load_start('aurora_postgresql',
    'my-db-cluster',
    'postgres',
    'full_load_and_cdc',
    'arn:aws-cn:iam::123456789012:role/aurora-data-loader-8f2c66',
    'arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:secret-source-8f2c66-
EWrr0V',
    'arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:secret-destination-8f2c66-
d04fbD',
    'true',
    'false',
    tables => ARRAY['public.customer', 'public.order', 'public.orderdetails']);

INFO: limitless data load job id 1688761223647 is starting.
```

Monitoring data loading

Aurora PostgreSQL Limitless Database provides several ways to monitor data loading jobs:

- Listing data loading jobs
- Viewing details of data loading jobs using the job ID
- Monitoring the Amazon CloudWatch log group
- Monitoring RDS events

Listing data loading jobs

You can connect to the cluster endpoint and use the `rds_aurora.limitless_data_load_jobs` view to list data loading jobs.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_data_load_jobs LIMIT 6;

    job_id     |  status   | message |     source_db_identifier      | source_db_name |
 full_load_complete_time |
   progress_details                                                                 |
     start_time       |   last_updated_time    |  streaming_mode   | source_engine_type
 | ignore_primary_key_conflict | is_dryrun
--------------+-----------+---------+-------------------------------+---------------
+-------------------------
+-------------------------------------------------------------------------------------------------------
+------------------------+------------------------+------------------
+--------------------+----------------------------+-----------
 1725697520693 | COMPLETED |         | persistent-kdm-auto-source-01 | postgres
    | 2024-09-07 08:48:15+00  | {"FULL_LOAD": {"STATUS": "COMPLETED", "DETAILS": "9
 of 9 tables loaded", "COMPLETED_AT": "2024/09/07 08:48:15+00", "RECORDS_MIGRATED":
 600003}} | 2024-09-07 08:47:13+00 | 2024-09-07 08:48:15+00 | full_load         |
 aurora_postgresql  | t                          | f
 1725696114225 | COMPLETED |         | persistent-kdm-auto-source-01 | postgres
    | 2024-09-07 08:24:20+00  | {"FULL_LOAD": {"STATUS": "COMPLETED", "DETAILS": "3
 of 3 tables loaded", "COMPLETED_AT": "2024/09/07 08:24:20+00", "RECORDS_MIGRATED":
 200001}} | 2024-09-07 08:23:56+00 | 2024-09-07 08:24:20+00 | full_load         |
 aurora_postgresql  | t                          | f
 1725696067630 | COMPLETED |         | persistent-kdm-auto-source-01 | postgres
    | 2024-09-07 08:23:45+00  | {"FULL_LOAD": {"STATUS": "COMPLETED", "DETAILS": "6
 of 6 tables loaded", "COMPLETED_AT": "2024/09/07 08:23:45+00", "RECORDS_MIGRATED":
 400002}} | 2024-09-07 08:23:10+00 | 2024-09-07 08:23:45+00 | full_load         |
 aurora_postgresql  | t                          | f
```

```
 1725694221753 | CANCELED  |         | persistent-kdm-auto-source-01 | postgres
    |                         | {}

            | 2024-09-07 07:31:18+00 | 2024-09-07 07:51:49+00 | full_load_and_cdc |
 aurora_postgresql  | t                           | f
 1725691698210 | COMPLETED |         | persistent-kdm-auto-source-01 | postgres
    | 2024-09-07 07:10:51+00  | {"FULL_LOAD": {"STATUS": "COMPLETED", "DETAILS": "1
 of 1 tables loaded", "COMPLETED_AT": "2024/09/07 07:10:51+00", "RECORDS_MIGRATED":
 100000}} | 2024-09-07 07:10:42+00 | 2024-09-07 07:10:52+00 | full_load         |
 aurora_postgresql  | t                           | f
 1725691695049 | COMPLETED |         | persistent-kdm-auto-source-01 | postgres
    | 2024-09-07 07:10:48+00  | {"FULL_LOAD": {"STATUS": "COMPLETED", "DETAILS": "1
 of 1 tables loaded", "COMPLETED_AT": "2024/09/07 07:10:48+00", "RECORDS_MIGRATED":
 100000}} | 2024-09-07 07:10:41+00 | 2024-09-07 07:10:48+00 | full_load         |
 aurora_postgresql  | t                           | f
(6 rows)
```

Job records are deleted after 90 days.

Viewing details of data loading jobs using the job ID

If you know a job ID, you can connect to the cluster endpoint and use the `rds_aurora.limitless_data_load_job_details` view to see the details of that data loading job, including the table name, job status, and number of rows loaded. You can get the job ID in the responses to the data loading start functions, or from the `rds_aurora.limitless_data_load_jobs` view.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_data_load_job_details WHERE
 job_id='1725696114225';

job_id        | destination_table_name | destination_schema_name | start_time
      | status    | full_load_rows | full_load_total_rows | full_load_complete_time |
 cdc_insert | cdc_update | cdc_delete
--------------+------------------------+-------------------------
+-------------------------+-----------+----------------+---------------------
+-------------------------+------------+------------+------------
1725696114225 | standard_1             | public                  | 2024-09-07
 08:23:57+00 | COMPLETED | 100000         | 100000               | 2024-09-07
 08:24:08+00  | 0          | 0          | 0
1725696114225 | standard_2             | public                  | 2024-09-07
 08:24:08+00 | COMPLETED | 100000         | 100000               | 2024-09-07
 08:24:17+00  | 0          | 0          | 0
```

```
1725696114225 | standard_3             | public                  | 2024-09-07
 08:24:18+00 | COMPLETED | 1             | 1                       | 2024-09-07
 08:24:20+00  | 0          | 0          | 0
1725696114225 | standard_4             | public                  | 2024-09-07
 08:23:58+00 | PENDING   | 0             | 0                       |
    | 0          | 0          | 0
(4 rows)
```

Job records are deleted after 90 days.

Monitoring the Amazon CloudWatch log group

After the data loading job status changes to `RUNNING`, you can check the runtime progress using Amazon CloudWatch Logs.

To monitor CloudWatch log streams

Sign in to the Amazon Web Services Management Console and open the CloudWatch console at https://console.amazonaws.cn/cloudwatch/.

1. Navigate to **Logs**, then **Log groups**.
2. Choose the **/aws/rds/aurora-limitless-database** log group.
3. Search for the log stream of your data loading job by **job_id**.

   The log stream has the pattern **Data-Load-Job-*job_id***.
4. Choose the log stream to see the log events.

Each log stream shows events containing the job status and the number of rows loaded to the Aurora PostgreSQL Limitless Database destination tables. If a data loading job fails, an error log is also created that shows the failure status and the reason.

Job records are deleted after 90 days.

Monitoring RDS events

The data loading job also publishes RDS events, for example when a job succeeds, fails, or is canceled. You can view the events from the destination database.

For more information, see DB shard group events.

Canceling data loading

To cancel a data loading job, call the `rds_aurora.limitless_data_load_cancel` stored procedure, with the job ID as the input parameter. You call this stored procedure from the same database in the DB shard group where the specific data loading job was started. For example:

```
CALL rds_aurora.limitless_data_load_cancel(12345);

INFO: limitless data load job with id 12345 is canceling without rollback.
```

You can't cancel a data loading job that doesn't exist or isn't running in the same DB shard group.

The Aurora PostgreSQL Limitless Database data loading utility leaves loaded data in the destination tables without rollback, as the response shows. If you don’t want to keep the loaded data, we recommend truncating the destination tables.

Querying Aurora PostgreSQL Limitless Database

Aurora PostgreSQL Limitless Database is compatible with PostgreSQL syntax for queries. You can query your Limitless Database using `psql` or any other connection utility that works with PostgreSQL. To run queries, you connect to the limitless endpoint as shown in Connecting to your Aurora PostgreSQL Limitless Database DB cluster.

All PostgreSQL `SELECT` queries are supported in Aurora PostgreSQL Limitless Database. However, queries are performed on two layers:

1. Router to which the client sends the query
2. Shards where the data is located

Performance depends on querying the database in a way that allows it to achieve a high degree of simultaneous processing of different queries on different shards. Queries are first parsed in the distributed transaction layer (router). Before planning the query execution, there's an analysis phase to identify the location for all relations participating in the query. If all relations are sharded tables with a filtered shard key on the same shard, or reference tables, then query planning is skipped on the router layer and completely pushed down to the shard for planning and execution. This process reduces the number of round trips between different nodes (router and shard) and results in better performance in most cases. For more information, see Single-shard queries in Aurora PostgreSQL Limitless Database.

> **Note**
>
> There can be specific cases, such as a Cartesian product (cross join), where the query performs better by retrieving data separately from the shard.

For more information on query execution plans, see EXPLAIN in the Aurora PostgreSQL Limitless Database reference. For general information on queries, see Queries in the PostgreSQL documentation.

Topics

- Single-shard queries in Aurora PostgreSQL Limitless Database
- Distributed queries in Aurora PostgreSQL Limitless Database
- Distributed query tracing in PostgreSQL logs in Aurora PostgreSQL Limitless Database

- Distributed deadlocks in Aurora PostgreSQL Limitless Database

Single-shard queries in Aurora PostgreSQL Limitless Database

A *single-shard query* is a query that can be run directly on a shard while maintaining SQL ACID semantics. When such a query is encountered by the query planner on the router, the planner detects it and proceeds to push down the entire SQL query to the corresponding shard.

This optimization reduces the number of network round trips from the router to the shard, improving the performance. Currently this optimization is performed for `INSERT`, `SELECT`, `UPDATE`, and `DELETE` queries.

Topics

- Single-shard query examples
- Restrictions for single-shard queries
- Fully qualified (explicit) joins
- Setting an active shard key

Single-shard query examples

In the following examples, we have the sharded table `customers`, with the shard key `customer_id`, and the reference table `zipcodes`.

SELECT

```
postgres_limitless=> EXPLAIN (VERBOSE, COSTS OFF) SELECT * FROM customers WHERE
 customer_id = 100;

                       QUERY PLAN
-------------------------------------------------------------
 Foreign Scan
   Output: customer_id, other_id, customer_name, balance
   Remote SQL:  SELECT customer_id,
     other_id,
     customer_name,
     balance
    FROM public.customers
   WHERE (customer_id = 100)
```

```
 Single Shard Optimized
(9 rows)
```

```
postgres_limitless=> EXPLAIN (VERBOSE, COSTS OFF) SELECT * FROM orders
    LEFT JOIN zipcodes ON orders.zipcode_id = zipcodes.zipcode_id
    WHERE customer_id = 11;

                                                QUERY PLAN

-------------------------------------------------------------------------------------------------------
 Foreign Scan
   Output: customer_id, order_id, zipcode_id, customer_name, balance,
 zipcodes.zipcode_id, zipcodes.city
   Remote SQL:  SELECT orders.customer_id,
     orders.order_id,
     orders.zipcode_id,
     orders.customer_name,
     orders.balance,
     zipcodes.zipcode_id,
     zipcodes.city
    FROM (public.orders
      LEFT JOIN public.zipcodes ON ((orders.zipcode_id = zipcodes.zipcode_id)))
   WHERE (orders.customer_id = 11)
 Single Shard Optimized
(13 rows)
```

INSERT

```
postgres_limitless=> EXPLAIN (VERBOSE, COSTS OFF) INSERT INTO customers
    (customer_id, other_id, customer_name, balance)
    VALUES (1, 10, 'saikiran', 1000);

                      QUERY PLAN
------------------------------------------------------
 Insert on public.customers
   ->  Result
         Output: 1, 10, 'saikiran'::text, '1000'::real
 Single Shard Optimized
(4 rows)
```

UPDATE

```
postgres_limitless=> EXPLAIN (VERBOSE, COSTS OFF) UPDATE orders SET balance = balance +
 100
    WHERE customer_id = 100;

                                        QUERY PLAN

-------------------------------------------------------------------------------------------
 Update on public.orders
   Foreign Update on public.orders_fs00002 orders_1
   ->  Foreign Update
         Remote SQL:  UPDATE public.orders SET balance = (balance + (100)::double
 precision)
   WHERE (customer_id = 100)
 Single Shard Optimized
(6 rows)
```

DELETE

```
postgres_limitless=> EXPLAIN (VERBOSE, COSTS OFF) DELETE FROM orders
    WHERE customer_id = 100 and balance = 0;

                             QUERY PLAN
---------------------------------------------------------------------
 Delete on public.orders
   Foreign Delete on public.orders_fs00002 orders_1
   ->  Foreign Delete
         Remote SQL:  DELETE FROM public.orders
   WHERE ((customer_id = 100) AND (balance = (0)::double precision))
 Single Shard Optimized
(6 rows)
```

Restrictions for single-shard queries

Single-shard queries have the following restrictions:

Functions

If a single-shard query contains a function, the query qualifies for single-shard optimization only if one of the following conditions applies:

- The function is immutable. For more information, see Function volatility.
- The function is mutable, but is registered in the `rds_aurora.limitless_distributed_functions` view. For more information, see Function distribution.

Views

If a query contains one or more views, single-shard optimization is disabled for the query if it has one of the following conditions:

- Any view has the `security_barrier` attribute.
- Objects used in the query require multiple user privileges. For example, a query contains two views, and the views are run under two different users.

```
CREATE VIEW v1 AS SELECT customer_name FROM customers c WHERE c.customer_id =  1;
CREATE VIEW v2 WITH (security_barrier) AS SELECT customer_name FROM customers c
 WHERE c.customer_id =  1;

postgres_limitless=> EXPLAIN VERBOSE SELECT * FROM v1;
                                    QUERY PLAN
-------------------------------------------------------------------------------
 Foreign Scan  (cost=100.00..101.00 rows=100 width=0)
   Output: customer_name
   Remote Plans from Shard postgres_s3:
         Seq Scan on public.customers_ts00001 c  (cost=0.00..24.12 rows=6 width=32)
           Output: c.customer_name
           Filter: (c.customer_id = 1)
         Query Identifier: -6005737533846718506
   Remote SQL:  SELECT customer_name
    FROM ( SELECT c.customer_name
             FROM public.customers c
            WHERE (c.customer_id = 1)) v1
 Query Identifier: -5754424854414896228
(12 rows)


postgres_limitless=> EXPLAIN VERBOSE SELECT * FROM v2;
                                        QUERY PLAN
-------------------------------------------------------------------------------------------
 Foreign Scan on public.customers_fs00001 c  (cost=100.00..128.41 rows=7 width=32)
   Output: c.customer_name
   Remote Plans from Shard postgres_s3:
```

```
         Seq Scan on public.customers_ts00001 customers  (cost=0.00..24.12 rows=6
 width=32)
           Output: customers.customer_name
           Filter: (customers.customer_id = 1)
         Query Identifier: 4136563775490008117
   Remote SQL: SELECT customer_name FROM public.customers WHERE ((customer_id = 1))
 Query Identifier: 5056054318010163757
(9 rows)
```

PREPARE and EXECUTE statements

Aurora PostgreSQL Limitless Database supports single-shard optimization for prepared SELECT, UPDATE, and DELETE statements.

However, if you use prepared statements for PREPARE and EXECUTE with `plan_cache_mode` set to `'force_generic_plan'`, the query planner rejects single-shard optimization for that query.

PL/pgSQL

Queries with PL/pgSQL variables are run as implicitly prepared statements. If a query contains any PL/pgSQL variables, the query planner rejects single-shard optimization.

Optimization is supported in the PL/pgSQL block if the statement doesn't contain any PL/pgSQL variables.

Fully qualified (explicit) joins

Single-shard optimization is based on partition eliminations. The PostgreSQL optimizer eliminates partitions based on constant conditions. If Aurora PostgreSQL Limitless Database finds that all of the remaining partitions and tables are on the same shard, it marks the query eligible for single-shard optimization. All filter conditions must be explicit for partition elimination to work. Aurora PostgreSQL Limitless Database can't eliminate partitions without one or more join predicates or filter predicates on the shard keys of every sharded table in the statement.

Assume that we've partitioned the `customers`, `orders`, and `order_details` tables based on the `customer_id` column. In this schema, the application tries to keep all of the data for a customer on a single shard.

Consider the following query:

```
SELECT * FROM
    customers c, orders o, order_details od
WHERE c.customer_id = o.customer_id
    AND od.order_id = o.order_id
    AND c.customer_id = 1;
```

This query retrieves all of the data for a customer (`c.customer_id = 1`). Data for this customer is on a single shard, but Aurora PostgreSQL Limitless Database doesn't qualify this query as a single-shard query. The optimizer process for the query is as follows:

1. The optimizer can eliminate partitions for `customers` and `orders` based on the following condition:

   ```
   c.customer_id = 1
   c.customer_id = o.customer_id
   o.customer_id =  1 (transitive implicit condition)
   ```

2. The optimizer can't eliminate any partitions for `order_details`, because there's no constant condition on the table.
3. The optimizer concludes that it has read all of the partitions from `order_details`. Therefore, the query can't be qualified for single-shard optimization.

To make this a single-shard query, we add the following explicit join condition:

```
o.customer_id = od.customer_id
```

The changed query looks like this:

```
SELECT * FROM
    customers c, orders o,  order_details od
WHERE c.customer_id = o.customer_id
     AND o.customer_id = od.customer_id
     AND od. order_id = o. order_id
 AND c.customer_id =  1;
```

Now the optimizer can eliminate partitions for `order_details`. The new query becomes a single-shard query and qualifies for optimization.

Setting an active shard key

This feature allows you to set a single shard key while querying the database, causing all SELECT and DML queries to be appended with the shard key as a constant predicate. This feature is useful if you've migrated to Aurora PostgreSQL Limitless Database and have denormalized the schema by adding shard keys to tables.

You can append a shard key predicate automatically to the existing SQL logic, without changing the semantics of the queries. Appending an active shard key predicate is done only for compatible tables.

The active shard key feature uses the `rds_aurora.limitless_active_shard_key` variable, which has the following syntax:

```
SET [session | local] rds_aurora.limitless_active_shard_key = '{"col1_value",
 "col2_value", ...}';
```

Some considerations about active shard keys and foreign keys:

- A sharded table can have a foreign key constraint if the parent and child tables are collocated and the foreign key is a superset of the shard key.
- A sharded table can have a foreign key constraint to a reference table.
- A reference table can have a foreign key constraint to another reference table.

Assume that we have a `customers` table that is sharded on the `customer_id` column.

```
BEGIN;
SET local rds_aurora.limitless_create_table_mode='sharded';
SET local rds_aurora.limitless_create_table_shard_key='{"customer_id"}';
CREATE TABLE customers(customer_id int PRIMARY KEY, name text , email text);
COMMIT;
```

With an active shard key set, queries have the following transformations.

SELECT

```
SET rds_aurora.limitless_active_shard_key = '{"123"}';
SELECT * FROM customers;
```

```
-- This statement is changed to:
SELECT * FROM customers WHERE customer_id = '123'::int;
```

INSERT

```
SET rds_aurora.limitless_active_shard_key = '{"123"}';
INSERT INTO customers(name, email) VALUES('Alex', 'alex@example.com');

-- This statement is changed to:
INSERT INTO customers(customer_id, name, email) VALUES('123'::int, 'Alex',
 'alex@example.com');
```

UPDATE

```
SET rds_aurora.limitless_active_shard_key = '{"123"}';
UPDATE customers SET email = 'alex_new_email@example.com';

-- This statement is changed to:
UPDATE customers SET email = 'alex_new_email@example.com' WHERE customer_id =
 '123'::int;
```

DELETE

```
SET rds_aurora.limitless_active_shard_key = '{"123"}';
DELETE FROM customers;

-- This statement is changed to:
DELETE FROM customers WHERE customer_id = '123'::int;
```

Joins

When performing join operations on tables with an active shard key, the shard key predicate is automatically added to all tables involved in the join. This automatic addition of the shard key predicate occurs only when all tables in the query belong to the same collocation group. If the query involves tables from different collocation groups, an error is raised instead.

Assume that we also have `orders` and `order_details` tables that are collocated with the `customers` table.

```
SET local rds_aurora.limitless_create_table_mode='sharded';
SET local rds_aurora.limitless_create_table_collocate_with='customers';
```

```
SET local rds_aurora.limitless_create_table_shard_key='{"customer_id"}';
CREATE TABLE orders (id int , customer_id int, total_amount int, date date);
CREATE TABLE order_details (id int , order_id int, customer_id int, product_name
 VARCHAR(100), price int);
COMMIT;
```

Retrieve the last 10 order invoices for a customer whose customer ID is 10.

```
SET rds_aurora.limitless_active_shard_key = '{"10"}';
SELECT * FROM customers, orders, order_details WHERE
    orders.customer_id = customers.customer_id AND
    order_details.order_id = orders.order_id AND
    customers.customer_id = 10
    order by order_date limit 10;
```

This query is transformed into the following:

```
SELECT * FROM customers, orders, order_details WHERE
    orders.customer_id = customers.customer_id AND
    orders.order_id = order_details.order_id AND
    customers.customer_id = 10 AND
    order_details.customer_id = 10 AND
    orders.customer_id = 10 AND
    ORDER BY "order_date" LIMIT 10;
```

Active shard key compatible tables

The shard key predicate is added only to tables that are compatible with the active shard key. A table is considered compatible if it has the same number of columns in its shard key as specified in the `rds_aurora.limitless_active_shard_key` variable. If the query involves tables that are incompatible with the active shard key, the system raises an error instead of proceeding with the query.

For example:

```
-- Compatible table
SET rds_aurora.limitless_active_shard_key = '{"10"}';

-- The following query works because the customers table is sharded on one column.
SELECT * FROM customers;
```

```
-- Incompatible table
SET rds_aurora.limitless_active_shard_key = '{"10","20"}';

-- The following query raises a error because the customers table isn't sharded on
 two columns.
 SELECT * FROM customers;
```

Distributed queries in Aurora PostgreSQL Limitless Database

Distributed queries run on a router and more than one shard. The query is received by one of the routers. The router creates and manages the distributed transaction, which is sent to the participating shards. The shards create a local transaction with the context provided by the router, and the query is run.

When the transaction is committed, the router uses an optimized two-phase commit protocol if needed, and time-based Multi Version Concurrency Control (MVCC) to provide ACID semantics in a distributed database system.

Time-based MVCC records the commit time for each transaction and uses the transaction start time to generate the data snapshot time. To identify whether a transaction is committed (visible) given a reader's snapshot, the database compares its commit time with the snapshot time. If its commit time is less than the reader's snapshot time, it is visible; otherwise, invisible. Under this protocol, you will always expect to see strongly consistent data on Aurora PostgreSQL Limitless Database.

Distributed query tracing in PostgreSQL logs in Aurora PostgreSQL Limitless Database

Distributed query tracing is a tool to trace and correlate queries in PostgreSQL logs across Aurora PostgreSQL Limitless Database. In Aurora PostgreSQL, you use the transaction ID to identify a transaction. But in Aurora PostgreSQL Limitless Database, the transaction ID can repeat across various routers. Therefore, we recommend that you use the tracing ID instead in Limitless Database.

The key use cases are the following:

- Use the `rds_aurora.limitless_get_last_trace_id()` function to find the unique tracing ID of the last query run in the current session. Then search the DB cluster log group in Amazon CloudWatch Logs using that tracing ID to find all the related logs.

  You can use the `log_min_messages` and `log_min_error_statement` parameters together to control the volume of logs printed and print a statement that contains the tracing ID.
- Use the `log_min_duration_statement` parameter to determine the run time above which all of the queries print their run duration and tracing ID. This run time can then be searched in the DB cluster log group in CloudWatch Logs to help determine the bottleneck nodes and planner optimization efforts.

  The `log_min_duration_statement` parameter enables the tracing ID for all nodes regardless of the values of `log_min_messages` and `log_min_error_statement` parameters.

Topics

- Tracing ID
- Using query tracing
- Log examples

Tracing ID

Central to this feature is a unique identifier known as the *tracing ID*. The tracing ID is a 31-digit string appended to the STATEMENT log lines of PostgreSQL logs, acting as a precise identifier for correlating logs related to a specific query execution. Examples are `1126253375719408504000000000011` and `1126253375719408495000000000090`.

The tracing ID is composed of the following:

- Transaction identifier – The first 20 digits, uniquely identifying the transaction.
- Command identifier – The first 30 digits, indicating an individual query within a transaction.

  If more than 4,294,967,294 queries are run inside an explicit transaction block, the command Identifier wraps around to 1. When this happens, you're notified by the following `LOG` message in the PostgreSQL log:

  ```
  wrapping around the tracing ID back to 1 after running 4294967294 (4.2 billion or
   2^32-2) queries inside of an explicit transaction block
  ```

- Node type identifier – The last digit, indicating whether the node is functioning as a coordinator router (`1`) or a participant node (`0`).

The following examples illustrate the components of the tracing ID:

- `11262533757194085040000000000011`:
  - Transaction identifier – `1126253375719408504`
  - Command identifier – `11262533757194085040000000000001` indicates the first command in the transaction block
  - Node type identifier – `1` indicates a coordinator router
- `11262533757194084950000000000090`:
  - Transaction identifier – `1126253375719408495`
  - Command identifier – `11262533757194084950000000000009` indicates the ninth command in the transaction block
  - Node type identifier – `0` indicates a participant node

Using query tracing

Perform the following tasks to use query tracing:

1. Make sure that tracing is enabled.

   You can check using the following command:

```
SHOW rds_aurora.limitless_log_distributed_trace_id;
```

It's enabled by default (on). If it's not enabled, set it using the following command:

```
SET rds_aurora.limitless_log_distributed_trace_id = on;
```

2. Control the volume of logs printed by configuring the log severity level.

   The log volume is controlled by the `log_min_messages` parameter. The `log_min_error_statement` parameter is used to print the STATEMENT line with the tracing ID. Both are set to ERROR by default. You can check using the following commands:

   ```
   SHOW log_min_messages;
   SHOW log_min_error_statement;
   ```

   To update the severity level and print the STATEMENT line for the current session, use the following commands with one of these severity levels:

```
SET log_min_messages = 'DEBUG5 | DEBUG4 | DEBUG3 | DEBUG2 | DEBUG1 | INFO | NOTICE
 | WARNING | ERROR | LOG | FATAL | PANIC';
SET log_min_error_statement = 'DEBUG5 | DEBUG4 | DEBUG3 | DEBUG2 | DEBUG1 | INFO
 | NOTICE | WARNING | ERROR | LOG | FATAL | PANIC';
```

   For example:

   ```
   SET log_min_messages = 'WARNING';
   SET log_min_error_statement = 'WARNING';
   ```

3. Enable printing the tracing ID in the logs above a specific run time.

   The `log_min_duration_statement` parameter can be changed to the minimum query run time above which the query prints a log line with the run duration, along with the tracing IDs across the DB cluster. This parameter is set to `-1` by default, which means it's disabled. You can check using the following command:

   ```
   SHOW log_min_duration_statement;
   ```

Changing it to `0` prints the duration and tracing ID in the logs for every query across the DB cluster. You can set it to `0` for the current session by using the following command:

```
SET log_min_duration_statement = 0;
```

4. Obtain the tracing ID.

   After running a query (even inside an explicit transaction block), call the `rds_aurora.limitless_get_last_trace_id` function to obtain the tracing ID of the last query run:

   ```
   SELECT * FROM rds_aurora.limitless_get_last_trace_id();
   ```

   This function returns the transaction identifier and the command identifier. It doesn't return the node type identifier.

   ```
   => SELECT * FROM customers;
    customer_id | fname | lname
   -------------+-------+-------
   (0 rows)

   => SELECT * FROM rds_aurora.limitless_get_last_trace_id();
    transaction_identifier |       command_identifier
   ------------------------+--------------------------------
    10104661421959001813   | 1010466142195900181300000000001
   (1 row)
   ```

   The function returns a blank line for nondistributed queries, as they don't have a tracing ID.

   ```
   => SET search_path = public;
   SET

   => SELECT * FROM rds_aurora.limitless_get_last_trace_id();
    transaction_identifier | command_identifier
   ------------------------+--------------------
                           |
   (1 row)
   ```

> **Note**
>
> For VACUUM and ANALYZE queries, the duration statement isn't logged with the tracing ID. Therefore, `limitless_get_last_trace_id()` doesn't return the tracing ID. If VACUUM or ANALYZE is a long-running operation, you can use the following query to obtain the tracing ID for that operation:
>
> ```
> SELECT * FROM rds_aurora.limitless_stat_activity
> WHERE distributed_tracing_id IS NOT NULL;
> ```
>
> If the server stops before you can find the last tracing ID, you will have to search the PostgreSQL logs manually to find the tracing IDs in the logs from right before the failure.

5. Search for the tracing ID across the DB cluster logs using CloudWatch.

   Use CloudWatch Insights to query the DB cluster's log group, as shown in the following examples.

   - Query for a particular transaction identifier and all of the commands run inside it:

     ```
     fields @timestamp, @message
     | filter @message like /10104661421959001813/
     | sort @timestamp desc
     ```

   - Query for a particular command identifier:

     ```
     fields @timestamp, @message
     | filter @message like /10104661421959001813000000001/
     | sort @timestamp desc
     ```

6. Examine all of the logs across the DB cluster produced by the distributed query.

Log examples

The following examples show the use of query tracing.

Correlating logs for error-prone queries

In this example the TRUNCATE command is run on the `customers` table when that table doesn't exist.

Without query tracing

PostgreSQL log file on the coordinator router:

```
2023-09-26 04:03:19 UTC:[local]: postgres@postgres_limitless:[27503]:ERROR: failed to
 execute remote query
2023-09-26 04:03:19 UTC:[local]: postgres@postgres_limitless:[27503]:DETAIL: relation
 "public.customers" does not exist
2023-09-26 04:03:19 UTC:[local]: postgres@postgres_limitless:[27503]:CONTEXT: remote
 SQL command: truncate public.customers;
2023-09-26 04:03:19 UTC:[local]: postgres@postgres_limitless:[27503]:STATEMENT:
 truncate customers;
```

PostgreSQL log file on a participant shard:

```
2023-09-26 04:03:19 UTC:[local]: postgres@postgres_limitless:[ 27503]:ERROR: failed to
 execute remote query
2023-09-26 04:03:19 UTC:[local]: postgres@postgres_limitless:[ 27503]:STATEMENT:
 truncate customers;
```

These logs are typical. They lack the precise identifiers needed to easily correlate queries across the DB cluster.

With query tracing

PostgreSQL log file on the coordinator router:

```
2023-09-26 04:03:19 UTC:[local]:postgres@postgres_limitless:[27503]:ERROR: failed to
 execute remote query
2023-09-26 04:03:19 UTC:[local]:postgres@postgres_limitless:[27503]:DETAIL: relation
 "public.customers" does not exist
2023-09-26 04:03:19 UTC:[local]:postgres@postgres_limitless:[27503]:CONTEXT: remote SQL
 command: truncate public.customers;
```

```
2023-09-26 04:03:19 UTC:[local]:postgres@postgres_limitless:[27503]:STATEMENT: /* tid =
 112625337571940850270000000011 */ truncate customers;
```

PostgreSQL log file on a participant shard:

```
2023-09-26 04:03:19 UTC:[local]:postgres@postgres_limitless:[27503]:ERROR:  failed to
 execute remote query
2023-09-26 04:03:19 UTC:[local]:postgres@postgres_limitless:[27503]:STATEMENT:  /* tid
 = 112625337571940850270000000010 */ truncate customers;
```

In the presence of query tracing, each log line is appended with a 31-digit unique identifier. Here, 1126253375719408502700000000011 and 1126253375719408502700000000010 represent the tracing IDs for the coordinator and participant nodes, respectively.

- Transaction identifier – 11262533757194085027
- Command identifier: –1126253375719408502700000000001
- Node type identifier – The last digit, 1 or 0, indicates a coordinator router and participant node, respectively.

Correlating logs to find the query run time on various nodes

In this example, the `log_min_duration_statement` parameter has been updated to `0` to print the duration for all queries.

Without query tracing

```
2024-01-15 07:28:46 UTC:[local]:postgres@postgres_limitless:[178322]:LOG: duration:
 12.779 ms statement: select * from customers;
```

With query tracing

PostgreSQL log file on the coordinator router:


```
2024-01-15 07:32:08 UTC:[local]:postgres@postgres_limitless:[183877]:LOG: duration:
 12.618 ms statement: /* tid = 045766956624049708840000000011 */ select * from
 customers;
```

PostgreSQL log file on a participant shard:

```
2024-01-15 07:32:08 UTC:localhost(46358):postgres@postgres_limitless:[183944]:LOG:
 duration: 0.279 ms statement: /* tid = 045766956624049708840000000010 */ START
 TRANSACTION ISOLATION LEVEL READ COMMITTED
2024-01-15 07:32:08 UTC:localhost(46358):postgres@postgres_limitless:[183944]:LOG:
 duration: 0.249 ms parse <unnamed>: SELECT customer_id, fname, lname FROM
 public.customers
2024-01-15 07:32:08 UTC:localhost(46358):postgres@postgres_limitless:[183944]:LOG:
 duration: 0.398 ms bind <unnamed>/c1: SELECT customer_id, fname, lname FROM
 public.customers
2024-01-15 07:32:08 UTC:localhost(46358):postgres@postgres_limitless:[183944]:LOG:
 duration: 0.019 ms execute <unnamed>/c1: SELECT customer_id, fname, lname FROM
 public.customers
2024-01-15 07:32:08 UTC:localhost(46358):postgres@postgres_limitless:[183944]:LOG:
 duration: 0.073 ms statement: /* tid = 045766956624049708840000000010 */ COMMIT
 TRANSACTION
```

Distributed deadlocks in Aurora PostgreSQL Limitless Database

In a DB shard group, deadlocks can occur between transactions that are distributed among different routers and shards. For example, two concurrent distributed transactions that span two shards are run, as shown in the following figure.

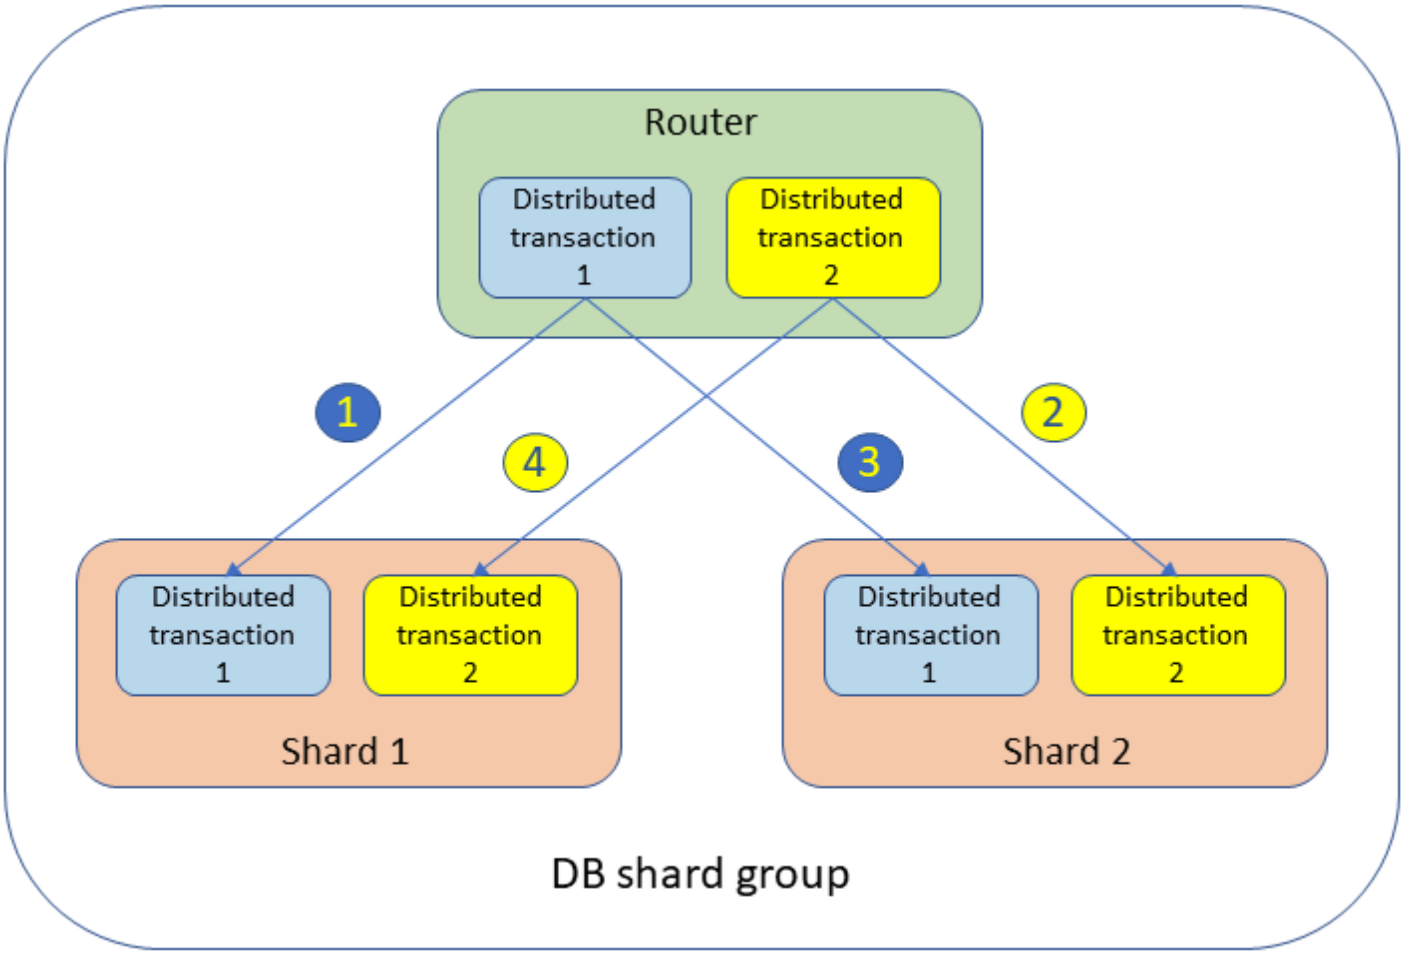

The transactions lock tables and create wait events in the two shards as follows:

1. Distributed transaction 1:

```
UPDATE table SET value = 1 WHERE key = 'shard1_key';
```

   This holds a lock on shard 1.

2. Distributed transaction 2:

```
UPDATE table SET value = 2 WHERE key = 'shard2_key';
```

This holds a lock on shard 2.

3. Distributed transaction 1:

```
UPDATE table SET value = 3 WHERE key = 'shard2_key';
```

Distributed transaction 1 is waiting on shard 2.

4. Distributed transaction 2:

```
UPDATE table SET value = 4 WHERE key = 'shard1_key';
```

Distributed transaction 2 is waiting on shard 1.

In this scenario, neither shard 1 nor shard 2 sees the problem: transaction 1 is waiting for transaction 2 on shard 2, and transaction 2 is waiting for transaction 1 on shard 1. From a global view, transaction 1 is waiting for transaction 2, and transaction 2 is waiting for transaction 1. This situation where two transactions on two different shards are waiting for each other is called a distributed deadlock.

Aurora PostgreSQL Limitless Database can detect and resolve distributed deadlocks automatically. A router in the DB shard group is notified when a transaction is waiting too long to acquire a resource. The router receiving the notification starts to collect the necessary information from all of the routers and shards within the DB shard group. The router then proceeds to end transactions that are participating in a distributed deadlock, until the rest of the transactions in the DB shard group can proceed without being blocked by each other.

You receive the following error when your transaction was part of a distributed deadlock, and was then ended by the router:

```
ERROR: aborting transaction participating in a distributed deadlock
```

The `rds_aurora.limitless_distributed_deadlock_timeout` DB cluster parameter sets the time for each transaction to wait on a resource before notifying the router to check for a distributed deadlock. You can increase the parameter value if your workload is less prone to deadlock situations. The default is `1000` milliseconds (1 second).

The distributed deadlock cycle is published to the PostgreSQL logs when a cross-node deadlock is found and resolved. The information about each process that's part of the deadlock includes the following:

- Coordinator node that started the transaction
- Virtual transaction ID (xid) of the transaction on the coordinator node, in the format *backend_id*/*backend_local_xid*
- Distributed session ID of the transaction

Managing Aurora PostgreSQL Limitless Database

The following topics describe how to manage your Aurora PostgreSQL Limitless Database DB clusters.

Topics

- Database and table size considerations
- Reclaiming storage space by vacuuming

Database and table size considerations

For Aurora PostgreSQL Limitless Database, on each shard a sharded table is divided into a number of table slices that varies depending on how many shards are available in the DB shard group. Each table slice can grow up to 32 TiB, but each shard has a maximum capacity of 128 TiB. Reference tables have a size limit of 32 TiB for the entire DB shard group.

> **Note**
>
> The maximum capacity of each node (router or shard) is 128 TiB, as this is the maximum capacity for an Aurora PostgreSQL DB cluster.

The maximum number of relations per database (including tables, views, and indexes) in both Aurora PostgreSQL and Aurora PostgreSQL Limitless Database is 1,431,650,303.

For more information, see Appendix K. PostgreSQL limits in the PostgreSQL documentation and Amazon Aurora size limits.

Reclaiming storage space by vacuuming

PostgreSQL Multiversion Concurrency Control (MVCC) helps to preserve data integrity by saving an internal copy of updated or deleted rows until a transaction is either committed or rolled back. These copies, also called *tuples*, can cause table bloat if they aren't cleaned up regularly. PostgreSQL instances order transactions by their transaction IDs, and PostgreSQL uses transaction ID–based MVCC to control tuple visibility and provide transaction isolation. Each transaction establishes a snapshot of data, and each tuple has a version. Both the snapshot and version are transaction ID–based.

To clean up data, the `VACUUM` utility performs four key functions in PostgreSQL:

- `VACUUM` – Removes expired row versions, making the space available for reuse.
- `VACUUM FULL` – Provides complete defragmentation by removing dead row versions and compacting the tables, reducing the size and increasing efficiency.
- `VACUUM FREEZE` – Protects against transaction ID wraparound issues by marking older row versions as frozen.
- `VACUUM ANALYZE` – Removes dead row versions and updates the database's query planning statistics. It's a combination of the `VACUUM` and `ANALYZE` functions. For more information on how `ANALYZE` works in Aurora PostgreSQL Limitless Database, see ANALYZE.

As with MVCC, vacuuming in Aurora PostgreSQL is transaction ID–based. If there's an ongoing transaction when vacuuming starts, rows that are still visible to that transaction aren't removed.

For more information on the `VACUUM` utility, see VACUUM in the PostgreSQL documentation. For more information about `VACUUM` support in Aurora PostgreSQL Limitless Database, see VACUUM.

Topics

- AUTOVACUUM
- Time-based vacuuming in Aurora PostgreSQL Limitless Database
- Using database statistics for vacuuming
- Differences in vacuuming behavior between Aurora PostgreSQL and Aurora PostgreSQL Limitless Database

AUTOVACUUM

Aurora PostgreSQL uses the VACUUM and AUTOVACUUM utilities to remove unneeded tuples. The underlying mechanism for AUTOVACUUM and manual VACUUM is the same; the only difference is the automation.

AUTOVACUUM in Aurora PostgreSQL and Aurora PostgreSQL Limitless Database is a combination of the VACUUM and ANALYZE utilities. AUTOVACUUM determines which databases and tables to clean up, according to a predefined rule, such as the percentage of dead tuples and the number of inserts.

For example, AUTOVACUUM "wakes up" periodically to perform cleanup. The interval is controlled by the autovacuum_naptime parameter. The default value is 1 minute. The default values for AUTOVACUUM and VACUUM configuration parameters are the same for Aurora PostgreSQL Limitless Database as for Aurora PostgreSQL.

The AUTOVACUUM daemon, if enabled, automatically issues ANALYZE commands whenever the content of a table has changed sufficiently. In Aurora PostgreSQL Limitless Database, AUTOVACUUM issues ANALYZE on both routers and shards.

For more information about the AUTOVACUUM daemon and table storage parameters associated with AUTOVACUUM, see The autovacuum daemon and Storage parameters in the PostgreSQL documentation.

Time-based vacuuming in Aurora PostgreSQL Limitless Database

Aurora PostgreSQL Limitless Database is a distributed system, meaning that multiple instances can be involved in a transaction. Therefore, transaction ID–based visibility doesn't apply. Instead, Aurora PostgreSQL Limitless Database uses *time-based* visibility, because transaction IDs aren't “unified” across instances, but time can be “unified” across instances. Each transaction snapshot and each tuple version obeys the time instead of the transaction ID. To be more specific, a transaction snapshot has a snapshot start time, and a tuple has a creation time (when an INSERT or UPDATE happens) and a deletion time (when a DELETE happens).

To maintain data consistency across the instances in the DB shard group, Aurora PostgreSQL Limitless Database has to make sure that vacuuming doesn't remove any tuples that are still visible to any active transaction in the DB shard group. Therefore, vacuuming in Aurora PostgreSQL Limitless Database is also time-based. Other aspects of VACUUM remain the same, including that to run VACUUM on a particular table, a user must have access to that table.

> **Note**
>
> We strongly recommend that you don't leave transactions open for long periods of time. Time-based vacuuming consumes more memory than transaction ID–based vacuuming.

The following example illustrates how time-based vacuuming works.

1. A customer table is distributed across four shards.
2. Transaction 1 starts with a repeatable read, and targets only one shard (shard 1). This transaction remains open.

   Transaction 1 is older than any other transaction started after it.
3. Transaction 2 starts later, and deletes all tuples from a table, then commits.
4. If `AUTOVACUUM` or manual `VACUUM` tries to clean up dead tuples (dead due to transaction 2), it doesn't remove anything.

   This is true not only for shard 1, but also for shards 2–4, because transaction 1 might still need to access these tuples. They're still visible to transaction 1 because of MVCC.

The last step is achieved through synchronization, so that all shards are aware of transaction 1, even though transaction 1 doesn't touch all of them.

Using database statistics for vacuuming

To get information on tuples that you might need to clean up, use the limitless_stat_all_tables view, which works similarly to pg_stat_all_tables. The following example queries the view.

```
SELECT * FROM rds_aurora.limitless_stat_all_tables WHERE relname LIKE '%customer%';
```

Similarly, for database statistics use limitless_stat_database instead of pg_stat_database, and limitless_stat_activity instead of pg_stat_activity.

To check table disk usage, use the limitless_stat_relation_sizes function, which works similarly to pg_relation_size. The following example queries the function.

```
SELECT * FROM rds_aurora.limitless_stat_relation_sizes('public','customer');
```

To track the progress of a VACUUM operation on Aurora PostgreSQL Limitless Database, use the limitless_stat_progress_vacuum view instead of pg_stat_progress_vacuum. The following example queries the view.

```
SELECT * FROM rds_aurora.limitless_stat_progress_vacuum;
```

For more information, see Aurora PostgreSQL Limitless Database views and Aurora PostgreSQL Limitless Database functions.

Differences in vacuuming behavior between Aurora PostgreSQL and Aurora PostgreSQL Limitless Database

Some other differences between Aurora PostgreSQL and Aurora PostgreSQL Limitless Database in how vacuuming works are the following:

- Aurora PostgreSQL performs VACUUM operations on transaction IDs up to the oldest ongoing transaction. If there's no ongoing transaction in the database, VACUUM performs the operation until the last transaction.
- Aurora PostgreSQL Limitless Database synchronizes the oldest time snapshot every 10 seconds. Therefore, VACUUM might not perform the operation on any transactions that were run within the last 10 seconds.

For information on support for VACUUM in Aurora PostgreSQL Limitless Database, see VACUUM in the Aurora PostgreSQL Limitless Database reference.

Monitoring Aurora PostgreSQL Limitless Database

You can use Amazon CloudWatch, Enhanced Monitoring, and Performance Insights to monitor Aurora PostgreSQL Limitless Database. There are also new statistics functions and views, and wait events, for Aurora PostgreSQL Limitless Database that you can use for monitoring and diagnostics.

Topics

- Monitoring Aurora PostgreSQL Limitless Database with Amazon CloudWatch
- Instance-specific performance and resource monitoring
- Monitoring Aurora PostgreSQL Limitless Database with CloudWatch Database Insights
- Monitoring Aurora PostgreSQL Limitless Database with Amazon CloudWatch Logs
- Monitoring Aurora PostgreSQL Limitless Database with Enhanced Monitoring
- Monitoring Aurora PostgreSQL Limitless Database with Performance Insights
- Monitoring Aurora PostgreSQL Limitless Database with Amazon GuardDuty RDS Protection
- Functions and views for Aurora PostgreSQL Limitless Database
- Wait events for Aurora PostgreSQL Limitless Database
- Building for efficiency with functions

Monitoring Aurora PostgreSQL Limitless Database with Amazon CloudWatch

CloudWatch metrics for Aurora PostgreSQL Limitless Database are reported under the following dimensions:

- DBShardGroup
- DBShardGroupRouterAggregation
- DBShardGroupInstance
- DBClusterIdentifier

For more information on CloudWatch metrics, see Monitoring Amazon Aurora metrics with Amazon CloudWatch.

DBShardGroup metrics

To see `DBShardGroup` metrics for Aurora PostgreSQL Limitless Database in the CloudWatch console, choose **RDS**, and then choose **DBShardGroup**.

You can track the following CloudWatch metrics:

- `DBShardGroupACUUtilization` – Aurora capacity unit (ACU) usage as a percentage calculated from `DBShardGroupCapacity` divided by `DBShardGroupMaxACU`.
- `DBShardGroupCapacity` – Number of ACUs consumed by the writer instances of the DB shard group.
- `DBShardGroupComputeRedundancyCapacity` – Number of ACUs consumed by the standby instances of DB shard group.
- `DBShardGroupMaxACU` – Maximum number of ACUs configured for the DB shard group.
- `DBShardGroupMinACU` – Minimum number of ACUs required by the DB shard group.

The `DBShardGroupIdentifier` dimension key is available for aggregating the `DBShardGroup` metrics.

DBShardGroupRouterAggregation metrics

To see `DBShardGroupRouterAggregation` metrics for Aurora PostgreSQL Limitless Database in the CloudWatch console, choose **RDS**, and then choose **DBShardGroupRouterAggregation**.

You can track the following CloudWatch metrics:

- `CommitThroughput` – The average number of commit operations per second across all of the router nodes in the DB shard group.
- `DatabaseConnections` – The sum of all connections across all of the router nodes in the DB shard group.

DBShardGroupInstance metrics

A *DBShardGroupInstance* is the individual DB instance within each shard or router subcluster.

To see `DBShardGroupInstance` metrics for Aurora PostgreSQL Limitless Database in the CloudWatch console, choose **RDS**, and then choose **DBShardGroupInstance**.

You can track the following CloudWatch metrics:

- `ACUUtilization` – The percentage calculated as the `ServerlessDatabaseCapacity` metric divided by the maximum assigned ACU value of the subcluster.
- `AuroraReplicaLag` - For compute redundancy enabled Limitless clusters, this is the amount of lag when replicating updates from the primary instance in the subcluster.
- `AuroraReplicaLagMaximum` – For compute redundancy enabled Limitless clusters, this is the maximum amount of lag when replicating updates from the primary instance in the subcluster. When read replicas are deleted or renamed, there might be a temporary spike in replication lag as the old resource recycles. Use this metric to find if a failover occurred due to high replication lag on one of the it's readers.
- `AuroraReplicaLagMinimum` – For compute redundancy enabled Limitless clusters, this is the minimum amount of lag when replicating updates from the primary instance in the subcluster.
- `BufferCacheHitRatio` – The percentage of data and indexes served from an instance's memory cache (as opposed to the storage volume).
- `CommitLatency` – The average duration for the engine and storage to complete the commit operations for a particular node (router or shard).
- `CommitThroughput` – The average number of commit operations per second.
- `CPUUtilization` – CPU usage as a percentage of the maximum assigned ACU value of the subcluster.
- `FreeableMemory` – The amount of unused memory that's available when the shard group is scaled to its maximum capacity. This is determined by the assigned ACUs of the shard group.

For every ACU the current capacity is below the maximum capacity, this value increases by approximately 2 GiB. Thus, this metric doesn't approach zero until the DB shard group is scaled up to the maximum limit.

- `MaximumUsedTransactionIDs` – The age of the oldest unvacuumed transaction ID, in transactions. If this value reaches 2,146,483,648 (2^31 - 1,000,000), the database is forced into read-only mode, to avoid transaction ID wraparound. For more information, see Preventing transaction ID wraparound failures in the PostgreSQL documentation.
- `NetworkReceiveThroughput` – The amount of network throughput received from clients by each instance in the DB shard group. This throughput doesn't include network traffic between instances in the DB shard group and the cluster volume.
- `NetworkThroughput` – The aggregated network throughput (both transmitted and received) between clients and routers, and routers and shards in the DB shard group. This throughput doesn't include network traffic between instances in the DB shard group and the cluster volume.
- `NetworkTransmitThroughput` – The amount of network throughput sent to clients by each instance in the DB shard group. This throughput doesn't include network traffic between instances in the DB shard group and the cluster volume.
- `ReadIOPS` – The average number of disk read input/output operations per second (IOPS).
- `ReadLatency` – The average amount time taken per disk read input/output (I/O) operation.
- `ReadThroughput` – The average number of bytes read from disk per second.
- `ServerlessDatabaseCapacity` – The current capacity of the DB shard or router subcluster within the DB shard group.
- `StorageNetworkReceiveThroughput` – The amount of network throughput received from the Aurora storage subsystem by each instance in the DB shard group.
- `StorageNetworkThroughput` – The aggregated network throughput both transmitted to and received from the Aurora storage subsystem by each instance in the DB shard group.
- `StorageNetworkTransmitThroughput` – The amount of network throughput sent to the Aurora storage subsystem by each instance in the DB shard group.
- `SwapUsage` – The amount of swap space used by the DB shard group.
- `TempStorageIOPS` – The average number of I/O operations performed on local storage attached to the DB instance. It includes both read and write I/O operations.

  `TempStorageIOPS` can be used with `TempStorageThroughput` to diagnose the rare cases where network activity for transfers between your DB instances and local storage devices is responsible for unexpected capacity increases.

- `TempStorageThroughput` – The amount of data transferred to and from local storage associated with either a router or a shard.
- `WriteIOPS` – The average number of disk write IOPS.
- `WriteLatency` – The average amount time taken per disk write I/O operation.
- `WriteThroughput` – The average number of bytes written to disk per second.

The following dimension keys are available for aggregating the `DBShardGroupInstance` metrics:

- `DBClusterIdentifier` – The Aurora PostgreSQL DB cluster.
- `DBShardGroupIdentifier` – The DB shard group to which the instance belongs.
- `DBShardGroupSubClusterType` – The node type, either `Distributed Transaction Router` (router) or `Data Access Shard` (shard).
- `DBShardGroupSubClusterIdentifier` – The name of the router or shard to which the instance belongs.

The following are examples of aggregating CloudWatch metrics:

- Total `CPUUtilization` of all instances that belong to a particular shard or router in a DB shard group.
- Total `CPUUtilization` of all instances in a DB shard group.

DBClusterIdentifier metrics

To see `DBClusterIdentifier` metrics for Aurora PostgreSQL Limitless Database in the CloudWatch console, choose **RDS**, and then choose **DBClusterIdentifier**.

When you use Aurora PostgreSQL Limitless Database, you might have more input/output (I/O) operations than you would for an Aurora DB cluster. You can track the following CloudWatch metrics for your Limitless Database cluster:

- `VolumeReadIops` – The number of billed read I/O operations from a cluster volume, reported at 5-minute intervals.
- `VolumeWriteIops` – The number of write disk I/O operations to the cluster volume, reported at 5-minute intervals.

Aurora PostgreSQL Limitless Database uses the Aurora I/O-Optimized cluster storage configuration. With Aurora I/O-Optimized, you pay a single monthly price for all I/O operations, rather than paying for every one million I/O requests. For more information, see Storage configurations for Amazon Aurora DB clusters.

You might also use more storage than you would for an Aurora DB cluster. You can track the following CloudWatch metrics for storage:

- `BackupRetentionPeriodStorageUsed` – The total billed continuous backup storage usage of your Aurora PostgreSQL Limitless Database cluster.
- `SnapshotStorageUsed` – The total billed snapshot storage usage of your Aurora PostgreSQL Limitless Database cluster.
- `TotalBackupStorageBilled` – The sum of your costs for automated backup retention and DB cluster snapshots.

  For more information on backup storage costs, see Understanding Amazon Aurora backup storage usage.
- `VolumeBytesUsed` – The amount of storage used by your Aurora PostgreSQL Limitless Database cluster, reported at 5-minute intervals.

Instance-specific performance and resource monitoring

Monitoring on instance level is key to understand connection skew, workload skew and data skew, as well as when to add routers or split shards to scale up for higher throughput with retained latency.

Overview

When your application issues a query against Amazon Aurora PostgreSQL Limitless Database, that request traverses a sophisticated distributed system before returning results. A seemingly simple SELECT statement might touch multiple database instances, each playing a distinct role in processing your request. Understanding this journey—and the instances that power it—transforms how you design applications, interpret monitoring data, and diagnose performance issues.

This guide provides deep technical insight into Aurora PostgreSQL Limitless Database instance architecture:

- Limitless Architecture refresher, router and shards
- When and how to scale each instance type to meet your performance and capacity requirements
- How to monitor, troubleshoot, and optimize instance-level performance
- Best practices for application design that leverage the distributed architecture effectively

Instance architecture fundamentals

Aurora PostgreSQL Limitless Database achieves horizontal scalability through functional separation across two specialized instance types:

- **Router instances** provide the orchestration layer—they accept client connections, analyze queries, coordinate distributed operations, and aggregate results. Routers are stateless, meaning they don't store data and can be added or removed without data migration.
- **Shard instances** provide the data and compute layer—they store table data, execute queries against local data, and handle transactions. Shards are stateful, each owning a specific subset of your data determined by consistent hashing.

This separation allows Aurora PostgreSQL Limitless Database to scale connection handling, query coordination, and data storage independently based on your workload characteristics.

Router and shard comparison

Characteristic	Router Instances	Shard Instances
Primary Role	Query coordination and distribution	Data storage and query execution
State	Stateless (no data storage)	Stateful (owns data)
Scalability	Add/remove instantly	Requires data rebalancing
Resource Focus	CPU for coordination; moderate memory	CPU for queries; high memory for cache
Scaling Trigger	High connection count, distributed txn rate	High CPU, data volume, query throughput

Monitoring instance performance

Understanding instance-level performance is critical for operating Aurora PostgreSQL Limitless Database effectively. Instance-specific monitoring reveals the distribution patterns that impact performance: connection skew, workload skew, and data skew.

Detecting skew

In an ideal Aurora PostgreSQL Limitless Database deployment, workload and resources distribute evenly across instances. In practice, applications frequently experience skew—uneven distribution that concentrates load on specific instances.

Three types of skew to monitor:

- **Connection skew**: Uneven distribution of client connections across routers
- **Workload skew**: Uneven query load across shards due to hot shard keys
- **Data skew**: Uneven data volume across shards due to shard key frequency

Database Insights load distribution

The fastest way to assess instance-level health is Database Insights' Load Distribution view, which provides immediate visibility into how Active Sessions distribute across instances.

To access Load Distribution:

1. Navigate to RDS Console → Your Limitless Cluster
2. Select "Performance Insights" tab
3. Click "Load Distribution" section

Healthy pattern: Load distributed relatively evenly across instances

- Routers may show slightly higher AAS than shards (coordination overhead)
- Shard AAS values within 20% of each other indicates good balance

Concerning pattern: Significant concentration on specific instances

- One router with >70% of router load → Connection skew
- One shard with >50% of shard load → Workload or data skew
- Large variance between shards → Investigate shard key distribution

CloudWatch metrics

For deeper analysis beyond Database Insights, CloudWatch provides instance-specific metrics that reveal resource utilization patterns.

The `ServerlessDatabaseCapacity` metric with dimension `DBShardGroupInstance` shows ACU consumption per instance, providing the most direct view of resource utilization.

When to investigate:

- Router ACU variance >30% → Connection skew or cross-shard workload concentration
- Shard ACU variance >40% → Data or workload skew
- Any instance consistently at max ACU → Capacity constraint

Router monitoring and troubleshooting

Routers can experience performance issues from two primary causes: uneven connection distribution and cross-shard workload concentration.

Unevenly distributed sessions

Symptom: One router handles disproportionate share of connections

Root cause: DNS caching causes multiple connection requests to resolve to the same router endpoint.

Most common during:

- Benchmarking with tools like pgbench
- Connection pool initialization (many connections established rapidly)
- Application server restarts

Remedies:

- Make sure to use the Limitless endpoint specified in the console
- Manual balancing: extract router endpoints and connect different applications to different routers
- For libpq applications use the feature `LOADBALANCEHOSTS`
- For JDBC applications use the Limitless connection Plugin
- Use an NLB to manage sessions and distributions

Shard monitoring and troubleshooting

Shards experience performance issues from three primary causes: resource constraints, data skew, and workload skew.

Shard resource utilization

A shard with popular shard keys will have more data and higher workloads. This manifests as resource utilization, that is, the instance will consume more ACUs.

Remediation strategies:

1. **Re-assess shard key selection:** Review shard key cardinality and access patterns. Consider composite shard keys for better distribution.
2. **Split the shard:** Distribute load across more shard instances

When to split shards:

- Single shard consistently at >80% max ACU
- Query throughput limited by single shard capacity

Shard data volumes

Use Aurora PostgreSQL Limitless Database SQL functions to query data volumes:

```
SELECT subcluster_id, subcluster_type, pg_size_pretty(db_size)
FROM rds_aurora.limitless_stat_database_size('postgres_limitless')
ORDER BY 1;
```

To view per-table and per-shard data:

```
SELECT * FROM rds_aurora.limitless_stat_relation_sizes('public', 'table_name');
```

Resolving uneven utilization

When workload or data skew concentrates on specific shards, splitting shards redistributes load across more instances.

Important considerations:

- Which shard keys to move cannot be controlled
- There is no way of undoing a split without recovering to a manual snapshot taken before the split
- All instances, including a new shard, consume instance minimum ACU when idling

Splitting shards allow further scaling, and consecutive shard splits is the path to higher throughput and further scaling, while retaining low latency.

Limitations

Be aware of these operational constraints:

Router limitations:

- **Routers cannot be removed** - Once added, routers remain in cluster
- Plan router additions carefully to avoid unnecessary baseline costs

Shard limitations:

- **Shards cannot be merged** - Shard splits are one-way operations
- Only recovery option: Restore from snapshot taken before split

Mitigation strategies:

- Start with minimum viable instance count
- Add capacity incrementally as needed
- Take snapshots before major topology changes
- Monitor baseline costs as cluster grows

Monitoring Aurora PostgreSQL Limitless Database with CloudWatch Database Insights

The Standard mode of Database Insights is required as part of enabling Aurora PostgreSQL Limitless Database. You can use it to monitor the database load (DB Load) of your Limitless Database DB instances in real time. DB Load measures the level of session activity in a database. You can use Database Insights to analyze and troubleshoot the performance of your Aurora PostgreSQL Limitless Database DB instances at scale.

For more information about CloudWatch Database Insights, see the following.

- Monitoring Amazon Aurora databases with CloudWatch Database Insights
- CloudWatch Database Insights in the *Amazon CloudWatch User Guide*
- Get started with CloudWatch Database Insights in the *Amazon CloudWatch User Guide*
- Configuring your database to monitor slow SQL queries with Database Insights for Amazon Aurora

For information about turning on the Advanced mode or Standard mode of Database Insights, see the following topics.

Topics

- Turning on the Advanced mode of Database Insights for Aurora PostgreSQL Limitless Database
- Turning on the Standard mode of Database Insights for Aurora PostgreSQL Limitless Database

Turning on the Advanced mode of Database Insights for Aurora PostgreSQL Limitless Database

To turn on the Advanced mode of Database Insights for your Aurora PostgreSQL Limitless Database, use the following procedures.

Turning on the Advanced mode of Database Insights when creating a DB cluster for Aurora PostgreSQL Limitless Database

Turn on the Advanced mode of Database Insights when creating a database for Aurora PostgreSQL Limitless Database.

Console

In the console, you can turn on the Advanced mode of Database Insights when you create a DB cluster. Settings for Database Insights apply to all DB instances in your DB cluster.

To turn on the Advanced mode of Database Insights when creating a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose **Create database**.
4. In the **Database Insights** section, select **Advanced mode**. Then, choose the following options:
   - **Retention** – The amount of time to retain Performance Insights data. The retention period must be 15-24 months for the Advanced mode of Database Insights.
   - **Amazon KMS key** – Specify your KMS key. Performance Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Encrypting Amazon Aurora resources.
5. Choose **Create database**.

Amazon CLI

To turn on the Advanced mode of Database Insights when creating a DB cluster, call the create-db-cluster Amazon CLI command and supply the following values:

- `--db-cluster-identifier` – The identifier for the DB cluster.
- `--database-insights-mode advanced` to turn on the Advanced mode of Database Insights.
- `--engine` – The DB cluster must use the `aurora-postgresql` DB engine.
- `--engine-version` – The DB cluster must use one of the DB engine versions:
  - `16.4-limitless`
  - `16.6-limitless`
- `--storage-type` – The DB cluster must use the `aurora-iopt1` DB cluster storage configuration.

- `--cluster-scalability-type` – Specifies the scalability mode of the Aurora DB cluster. When set to `limitless`, the cluster operates as an Aurora PostgreSQL Limitless Database. When set to `standard` (the default), the cluster uses normal DB instance creation.

  > **Note**
  >
  > You can't modify this setting after you create the DB cluster.

- `--master-username` – The name of the master user for the DB cluster.
- `--master-user-password` – The password for the master user.
- `--enable-performance-insights` to turn on Performance Insights for Database Insights.
- `--performance-insights-retention-period` – The retention period for data for your DB cluster. To turn on Database Insights, the retention period must be at least 465 days.
- `--monitoring-interval` – The interval, in seconds, between points when Enhanced Monitoring metrics are collected for the DB cluster. This value can't be `0`.
- `--monitoring-role-arn` – The Amazon Resource Name (ARN) for the IAM role that permits RDS to send Enhanced Monitoring metrics to Amazon CloudWatch Logs.
- `--enable-cloudwatch-logs-exports` – You must export `postgresql` logs to CloudWatch Logs.

The following example enables the Advanced mode of Database Insights when creating a DB cluster.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
--db-cluster-identifier my-limitless-cluster \
--database-insights-mode advanced \
--engine aurora-postgresql \
--engine-version 16.6-limitless \
--storage-type aurora-iopt1 \
--cluster-scalability-type limitless \
--master-username myuser \
--master-user-password mypassword \
--enable-performance-insights \
--performance-insights-retention-period 465 \
--monitoring-interval 5 \
```

```
--monitoring-role-arn arn:aws:iam::123456789012:role/EMrole \
--enable-cloudwatch-logs-exports postgresql
```

For Windows:

```
aws rds create-db-cluster ^
--db-cluster-identifier my-limitless-cluster ^
--database-insights-mode advanced ^
--engine aurora-postgresql ^
--engine-version 16.6-limitless ^
--storage-type aurora-iopt1 ^
--cluster-scalability-type limitless ^
--master-username myuser ^
--master-user-password mypassword ^
--enable-performance-insights ^
--performance-insights-retention-period 465 ^
--monitoring-interval 5 ^
--monitoring-role-arn arn:aws:iam::123456789012:role/EMrole ^
--enable-cloudwatch-logs-exports postgresql
```

RDS API

To turn on the Advanced mode of Database Insights when you create a DB cluster, specify the following parameters for your CreateDBCluster Amazon RDS API operation.

- `DatabaseInsightsMode` to `advanced`
- `Engine` to `aurora-postgresql`
- `EngineVersion` to an available engine version for Limitless Database
- `StorageType` to `aurora-iopt1`
- `ClusterScalabilityType` to `limitless`
- `MasterUsername`
- `MasterUserPassword`
- `EnablePerformanceInsights` to `True`
- `PerformanceInsightsRetentionPeriod` to at least 465 days
- `MonitoringInterval` to a value that isn't `0`
- `MonitoringRoleArn` to the Amazon Resource Name (ARN) for the IAM role that permits RDS to send Enhanced Monitoring metrics to Amazon CloudWatch Logs

Turning on the Advanced mode of Database Insights when modifying a DB cluster for Aurora PostgreSQL Limitless Database

Turn on Database Insights when modifying a database for Aurora PostgreSQL Limitless Database.

> **Note**
>
> To enable Database Insights, each DB instance in aDB cluster must have the same Performance Insights and Enhanced Monitoring settings.

Console

In the console, you can turn on the Advanced mode of Database Insights when you modify a DB cluster. Settings for Database Insights apply to all DB instances in your DB cluster.

To turn on the Advanced mode of Database Insights when modifying a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose a DB cluster, and choose **Modify**.
4. In the **Database Insights** section, select **Advanced mode**. Then, choose the following options:
   - **Retention** – The amount of time to retain Performance Insights data. The retention period must be 15-24 months for the Advanced mode of Database Insights.
   - **Amazon KMS key** – Specify your KMS key. Performance Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Encrypting Amazon Aurora resources.
5. Choose **Continue**.
6. For **Scheduling of Modifications**, choose **Apply immediately**. If you choose **Apply during the next scheduled maintenance window**, your database ignores this setting and turns on the Advanced mode of Database Insights immediately.
7. Choose **Modify cluster**.

Amazon CLI

To turn on the Advanced mode of Database Insights when modifying a DB cluster, call the modify-db-cluster Amazon CLI command and supply the following values:

- `--database-insights-mode advanced` to turn on the Advanced mode of Database Insights.
- `--db-cluster-identifier` – The identifier for the DB cluster.
- `--enable-performance-insights` to turn on Performance Insights for Database Insights.
- `--performance-insights-retention-period` – The retention period for data for your DB cluster. To turn on the Advanced mode of Database Insights, the retention period must be at least 465 days.

The following example enables the Advanced mode of Database Insights when modifying a DB cluster.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --database-insights-mode advanced \
    --db-cluster-identifier sample-db-identifier \
    --enable-performance-insights \
    --performance-insights-retention-period 465
```

For Windows:

```
aws rds modify-db-cluster ^
    --database-insights-mode advanced ^
    --db-cluster-identifier sample-db-identifier ^
    --enable-performance-insights ^
    --performance-insights-retention-period 465
```

RDS API

To turn on the Advanced mode of Database Insights when you modify a DB cluster, specify the following parameters for your ModifyDBCluster Amazon RDS API operation.

- `DatabaseInsightsMode` to `advanced`

- `EnablePerformanceInsights` to `True`
- `PerformanceInsightsRetentionPeriod` to at least 465 days

Turning on the Standard mode of Database Insights for Aurora PostgreSQL Limitless Database

To turn on the Standard mode of Database Insights for your Aurora PostgreSQL Limitless Database, use the following procedures.

Turning on the Standard mode of Database Insights when creating a DB cluster for Aurora PostgreSQL Limitless Database

Turn on the Standard mode of Database Insights when creating a database for Aurora PostgreSQL Limitless Database.

Console

In the console, you can turn on the Standard mode of Database Insights when you create a DB cluster. Settings for Database Insights apply to all DB instances in your DB cluster.

To turn on the Standard mode of Database Insights when creating a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose **Create database**.
4. In the **Database Insights** section, select **Standard mode**. Then, choose the following options:
   - **Retention** – The amount of time to retain Performance Insights data. To create a DB cluster for Aurora PostgreSQL Limitless Database, the retention period must be at least 31 days.
   - **Amazon KMS key** – Specify your KMS key. Performance Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Encrypting Amazon Aurora resources.
5. Choose **Create database**.

Amazon CLI

To turn on the Standard mode of Database Insights when creating a DB cluster, call the create-db-cluster Amazon CLI command and supply the following values:

- `--db-cluster-identifier` – The identifier for the DB cluster.
- `--database-insights-mode standard` to turn on the Standard mode of Database Insights.
- `--engine` – The DB cluster must use the `aurora-postgresql` DB engine.
- `--engine-version` – The DB cluster must use one of the DB engine versions:
  - `16.4-limitless`
  - `16.6-limitless`
- `--storage-type` – The DB cluster must use the `aurora-iopt1` DB cluster storage configuration.
- `--cluster-scalability-type` – Specifies the scalability mode of the Aurora DB cluster. When set to `limitless`, the cluster operates as an Aurora PostgreSQL Limitless Database. When set to `standard` (the default), the cluster uses normal DB instance creation.

  > **Note**
  >
  > You can't modify this setting after you create the DB cluster.

- `--master-username` – The name of the master user for the DB cluster.
- `--master-user-password` – The password for the master user.
- `--enable-performance-insights` to turn on Performance Insights for Database Insights.
- `--performance-insights-retention-period` – The retention period for data for your DB cluster. To create a DB cluster for Aurora PostgreSQL Limitless Database, the retention period must be at least 31 days.
- `--monitoring-interval` – The interval, in seconds, between points when Enhanced Monitoring metrics are collected for the DB cluster. This value can't be `0`.
- `--monitoring-role-arn` – The Amazon Resource Name (ARN) for the IAM role that permits RDS to send Enhanced Monitoring metrics to Amazon CloudWatch Logs.
- `--enable-cloudwatch-logs-exports` – You must export `postgresql` logs to CloudWatch Logs.

The following example enables the Standard mode of Database Insights when creating a DB cluster.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
--db-cluster-identifier my-limitless-cluster \
--database-insights-mode standard \
--engine aurora-postgresql \
--engine-version 16.6-limitless \
--storage-type aurora-iopt1 \
--cluster-scalability-type limitless \
--master-username myuser \
--master-user-password mypassword \
--enable-performance-insights \
--performance-insights-retention-period 31 \
--monitoring-interval 5 \
--monitoring-role-arn arn:aws:iam::123456789012:role/EMrole \
--enable-cloudwatch-logs-exports postgresql
```

For Windows:

```
aws rds create-db-cluster ^
--db-cluster-identifier my-limitless-cluster ^
--database-insights-mode standard ^
--engine aurora-postgresql ^
--engine-version 16.6-limitless ^
--storage-type aurora-iopt1 ^
--cluster-scalability-type limitless ^
--master-username myuser ^
--master-user-password mypassword ^
--enable-performance-insights ^
--performance-insights-retention-period 31 ^
--monitoring-interval 5 ^
--monitoring-role-arn arn:aws:iam::123456789012:role/EMrole ^
--enable-cloudwatch-logs-exports postgresql
```

RDS API

To turn on the Standard mode of Database Insights when you create a DB cluster, specify the following parameters for your CreateDBCluster Amazon RDS API operation.

- `DatabaseInsightsMode` to `standard`

- `Engine` to `aurora-postgresql`
- `EngineVersion` to an available engine version for Limitless Database
- `StorageType` to `aurora-iopt1`
- `ClusterScalabilityType` to `limitless`
- `MasterUsername`
- `MasterUserPassword`
- `EnablePerformanceInsights` to `True`
- `PerformanceInsightsRetentionPeriod` to at least `31` days
- `MonitoringInterval` to a value that isn't `0`
- `MonitoringRoleArn` to the Amazon Resource Name (ARN) for the IAM role that permits RDS to send Enhanced Monitoring metrics to Amazon CloudWatch Logs

Turning on the Standard mode of Database Insights when modifying a DB cluster for Aurora PostgreSQL Limitless Database

Turn on Database Insights when modifying a database for Aurora PostgreSQL Limitless Database.

> **Note**
>
> To enable Database Insights, each DB instance in a DB cluster must have the same Performance Insights and Enhanced Monitoring settings.

Console

In the console, you can turn on the Standard mode of Database Insights when you create a DB cluster. Settings for Database Insights apply to all DB instances in your DB cluster.

To turn on the Standard mode of Database Insights when modifying a DB cluster using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose a DB cluster, and choose **Modify**.

4. In the **Database Insights** section, select **Standard mode**. Then, choose the following options:

   - **Retention** – The amount of time to retain Performance Insights data. To create a DB cluster for Aurora PostgreSQL Limitless Database, the retention period must be at least 31 days.
   - **Amazon KMS key** – Specify your KMS key. Performance Insights encrypts all potentially sensitive data using your KMS key. Data is encrypted in flight and at rest. For more information, see Encrypting Amazon Aurora resources.
5. Choose **Continue**.
6. For **Scheduling of Modifications**, choose **Apply immediately**. If you choose **Apply during the next scheduled maintenance window**, your database ignores this setting and turns on the Standard mode of Database Insights immediately.
7. Choose **Modify cluster**.

Amazon CLI

To turn on the Standard mode of Database Insights when modifying a DB cluster, call the modify-db-cluster Amazon CLI command and supply the following values:

- `--db-cluster-identifier` – The identifier for the DB cluster.
- `--database-insights-mode standard` to turn on the Standard mode of Database Insights.
- `--enable-performance-insights` to turn on Performance Insights for Database Insights.
- `--performance-insights-retention-period` – The retention period for data for your DB cluster. To turn on the Standard mode of Database Insights, the retention period must be at least 31 days.

The following example enables the Standard mode of Database Insights when modifying a DB cluster.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --database-insights-mode standard \
    --db-cluster-identifier sample-db-identifier \
    --enable-performance-insights \
```

```
    --performance-insights-retention-period 31
```

For Windows:

```
aws rds modify-db-cluster ^
    --database-insights-mode standard ^
    --db-cluster-identifier sample-db-identifier ^
    --enable-performance-insights ^
    --performance-insights-retention-period 31
```

RDS API

To turn on the Standard mode of Database Insights when you modify a DB cluster, specify the following parameters for your ModifyDBCluster Amazon RDS API operation.

- `DatabaseInsightsMode` to `standard`
- `EnablePerformanceInsights` to `True`
- `PerformanceInsightsRetentionPeriod` to at least 31 days

Monitoring Aurora PostgreSQL Limitless Database with Amazon CloudWatch Logs

Exporting PostgreSQL logs to CloudWatch Logs is required as part of enabling Aurora PostgreSQL Limitless Database. You can access and analyze these logs in CloudWatch Logs Insights, similar to accessing PostgreSQL logs for a standard Aurora PostgreSQL DB cluster. For more information, see Analyzing PostgreSQL logs using CloudWatch Logs Insights.

The log group name for the DB cluster is the same as in Aurora PostgreSQL:

```
/aws/rds/cluster/DB_cluster_ID/postgresql
```

The log group name for the DB shard group takes the following form:

```
/aws/rds/cluster/DB_cluster_ID/DB_shard_group_ID/postgresql
```

There are log streams for each node (router or shard). Their names have the following form:

```
[DistributedTransactionRouter|
DataAccessShard]/node_cluster_serial_ID-node_instance_serial_ID/n
```

For example:

- Router – `DistributedTransactionRouter/6-6.2`
- Shard – `DataAccessShard/22-22.0`

> **Note**
>
> You can't view PostgreSQL log files for the DB shard group directly in the RDS console, Amazon CLI, or RDS API as you can for the DB cluster. You must use CloudWatch Logs Insights to view them.

Monitoring Aurora PostgreSQL Limitless Database with Enhanced Monitoring

Enhanced Monitoring is required as part of enabling Aurora PostgreSQL Limitless Database. You can use it to monitor the operating system of your Limitless Database DB instances in real time.

Aurora publishes Enhanced Monitoring metrics in CloudWatch Logs. Some of the key metrics available include database connections, storage usage, and query latency. These can help identify performance bottlenecks.

For more information on Enhanced Monitoring metrics, see OS metrics for Aurora.

Monitoring Aurora PostgreSQL Limitless Database with Performance Insights

Use Performance Insights to monitor your Aurora PostgreSQL Limitless Database cluster. Performance Insights works similarly for Aurora PostgreSQL Limitless Database as it does for standard Aurora DB clusters. However, you track metrics at the shard group level for Aurora PostgreSQL Limitless Database.

The two main Performance Insights metrics to track are the following:

- Database load – Measures the level of activity in your database. The key metric in Performance Insights is `DBLoad`, which is collected every second.


  The unit for the `DBLoad` metric in Performance Insights is average active sessions (AAS). To get the average active sessions, Performance Insights samples the number of sessions concurrently running a query. The AAS is the total number of sessions divided by the total number of samples for a specific time period. For more information on `DBLoad` and AAS, see Database load.
- Maximum CPU – The maximum computational power available to your database. To see whether active sessions are exceeding the maximum CPU, look at their relationship to the `Max vCPU` line. The `Max vCPU` value is determined by the number of vCPU (virtual CPU) cores for your DB instance. For more information on `Max vCPU`, see Maximum CPU.

In addition, you can "slice" the `DBLoad` metric into *dimensions*, which are subcategories of the metric. The most useful dimensions are the following:

- Top instances – Shows the relative DB load for your instances (shards and routers) in descending order.
- Wait events – Cause SQL statements to wait for specific events to happen before they can continue running. Wait events indicate where work is impeded.
- Top SQL – Shows which queries contribute the most to DB load.

For more information about Performance Insights dimensions, see Dimensions.

The following figure shows the **Top instances** dimension for a DB shard group.

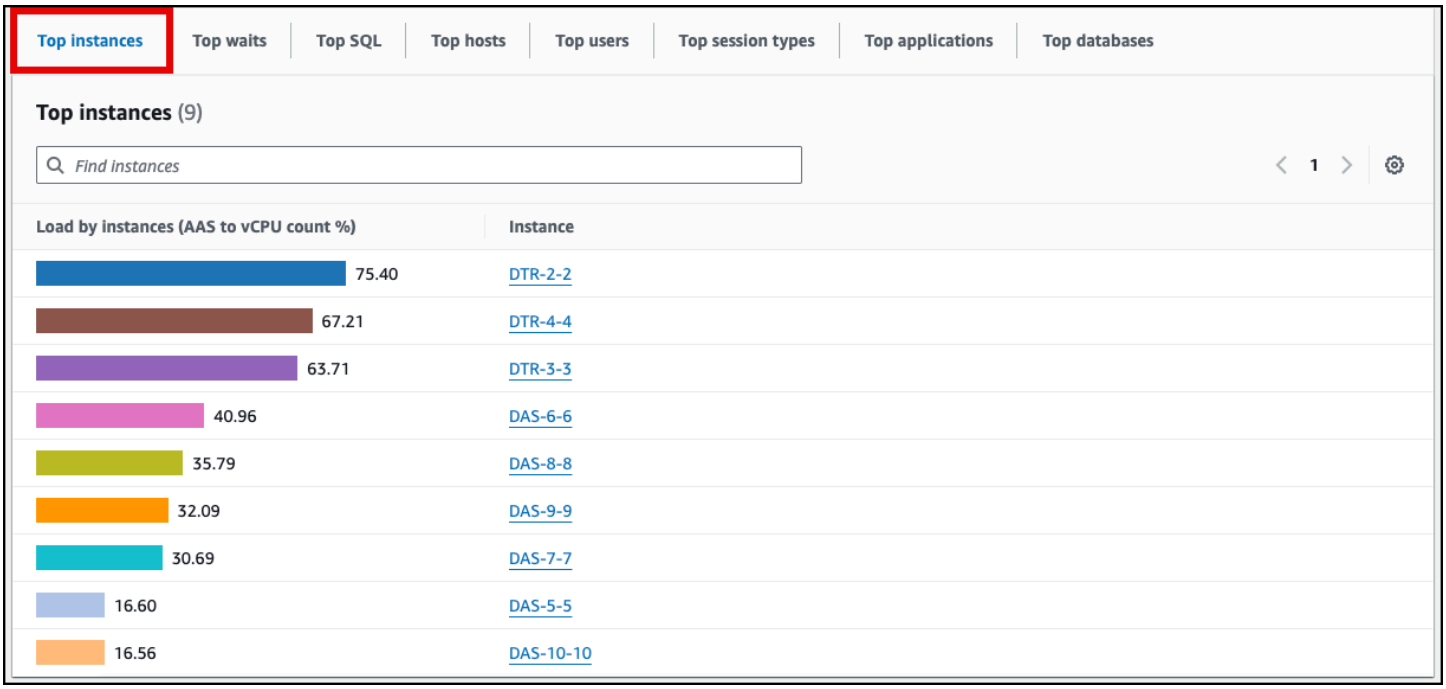

Topics

- Analyzing DB load for Aurora PostgreSQL Limitless Database using the Performance Insights dashboard

Analyzing DB load for Aurora PostgreSQL Limitless Database using the Performance Insights dashboard

With Performance Insights, you can track metrics at the shard group level and at the instance level for an Aurora PostgreSQL Limitless Database. When analyzing DB load for an Aurora PostgreSQL Limitless Database, you might want to compare the DB load for each shard and router to the maximum vCPU.

> **Note**
>
> Aurora PostgreSQL Limitless Database always has Performance Insights and Enhanced Monitoring enabled. The minimum retention period for Performance Insights data for Limitless Database is 31 days (1 month).

The **Absolute** view shows the number of Average active sessions (AAS) and the estimated vCPU. The **Relative** view shows the ratio of AAS to the estimated vCPU.

Topics

- Analyzing relative DB load for Aurora PostgreSQL Limitless Database using the Performance Insights dashboard
- Analyzing DB load by waits for Aurora PostgreSQL Limitless Database using the Performance Insights dashboard
- Analyzing load distribution for Aurora PostgreSQL Limitless Database using the Performance Insights dashboard

Analyzing relative DB load for Aurora PostgreSQL Limitless Database using the Performance Insights dashboard


You might want to improve the performance of your Aurora PostgreSQL Limitless Database by tracking relative DB load. To analyze relative DB load by instance for your Aurora PostgreSQL Limitless Database, use the following procedure.

To analyze relative DB load for Aurora PostgreSQL Limitless Database using the console

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.


3. Choose an Aurora PostgreSQL Limitless Database. The Performance Insights dashboard is displayed for that Aurora PostgreSQL Limitless Database.
4. In the **Database load (DB load)** section, choose **Instances** for **Sliced by**. To see the ratio of Average active sessions (AAS) to vCPU cores for all of the instances in your Aurora PostgreSQL Limitless Database, choose **Relative** for **Viewed as**.

   The Average active sessions chart shows the DB load for instances in your Aurora PostgreSQL Limitless Database.

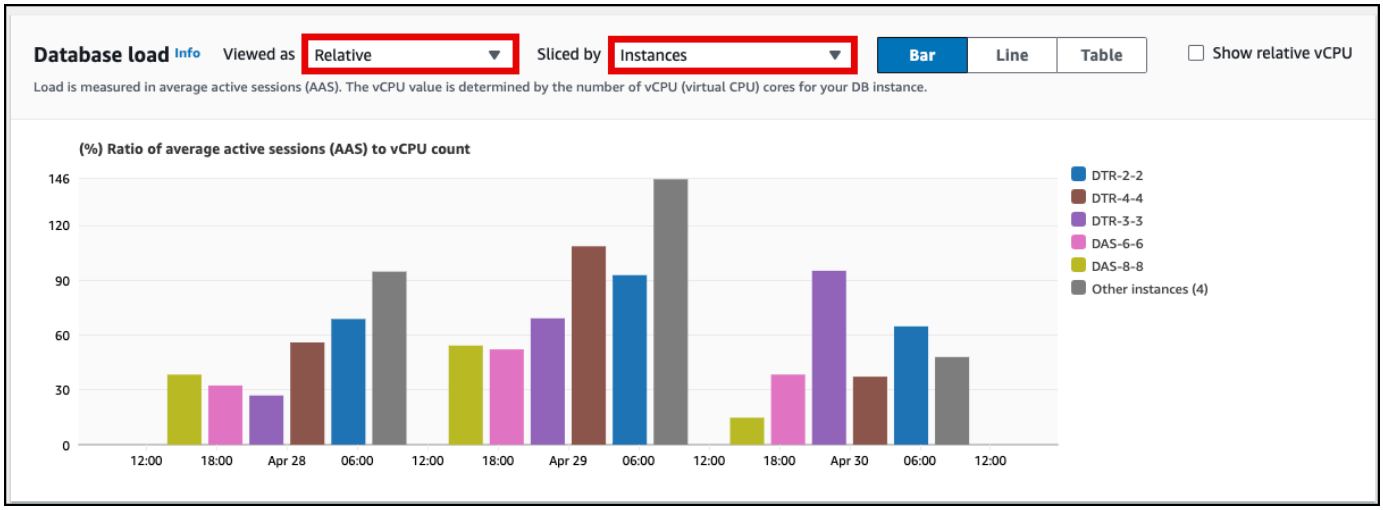

5. To view the top instances, choose the **Top instances** tab.

   In the following example, the instance with the highest DB load is DTR-2-2.

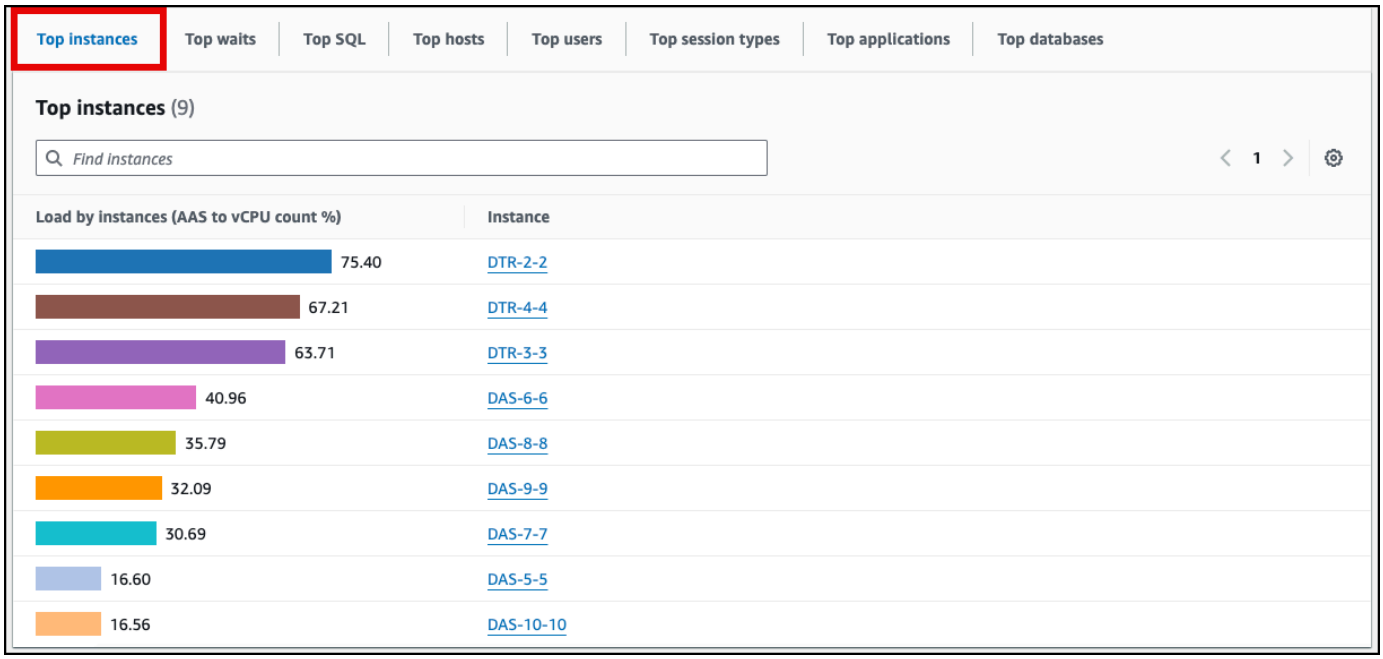

6. (Optional) To analyze DB load for an instance in your Aurora PostgreSQL Limitless Database, choose the instance name in the **Instances** column. To view the DB load for `DTR-2-2`, choose `DTR-2-2` in the **Instances** column.

   > **Note**
   >
   > You can view Performance Insights metrics only for instances in an Aurora PostgreSQL Limitless Database.


Analyzing DB load by waits for Aurora PostgreSQL Limitless Database using the Performance Insights dashboard

You might want to improve the performance for your Aurora PostgreSQL Limitless Database by tracking wait events. To analyze DB load by wait events for your Aurora PostgreSQL Limitless Database, use the following procedure.

To analyze DB load by waits for Aurora PostgreSQL Limitless Database using the console


1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose an Aurora PostgreSQL Limitless Database. The Performance Insights dashboard is displayed for that Aurora PostgreSQL Limitless Database.
4. In the **Database load (DB load)** section, choose **Waits** for **Sliced by**. To view the number of AAS and the estimated vCPU, choose **Absolute** for **Viewed as**.

   The Average active sessions chart shows the DB load for instances in your Aurora PostgreSQL Limitless Database.

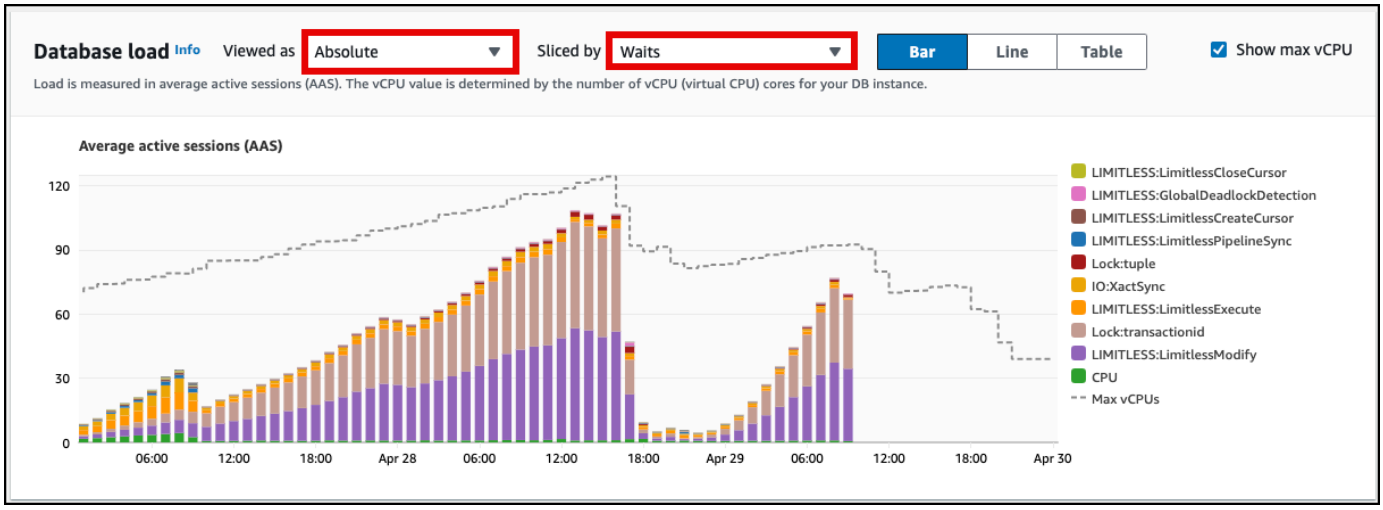


5. Scroll down to the **Top SQL** tab.

   In the following example, the SQL statement with the highest load by waits is the DELETE statement.

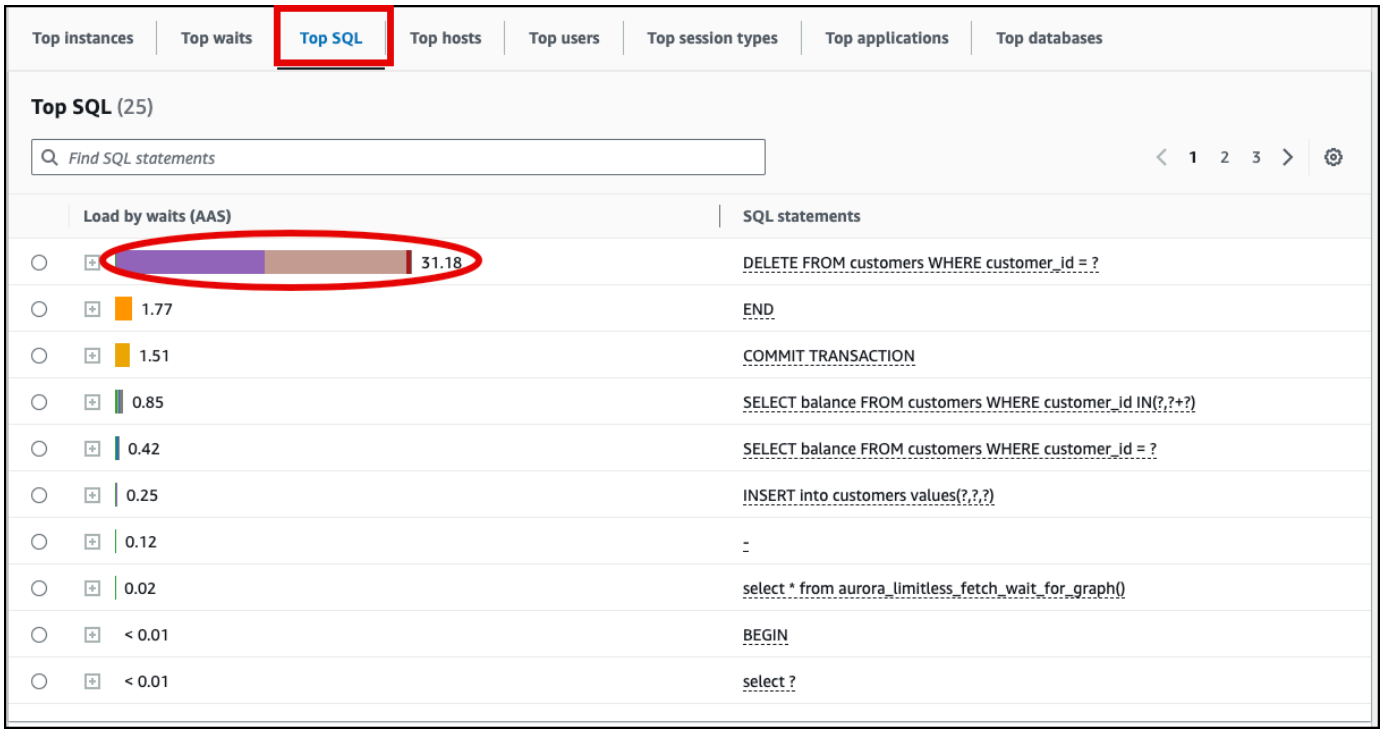

6. Choose the SQL statement to expand it into its component statements.

   In the following example, the SELECT statement has 3 component statements.

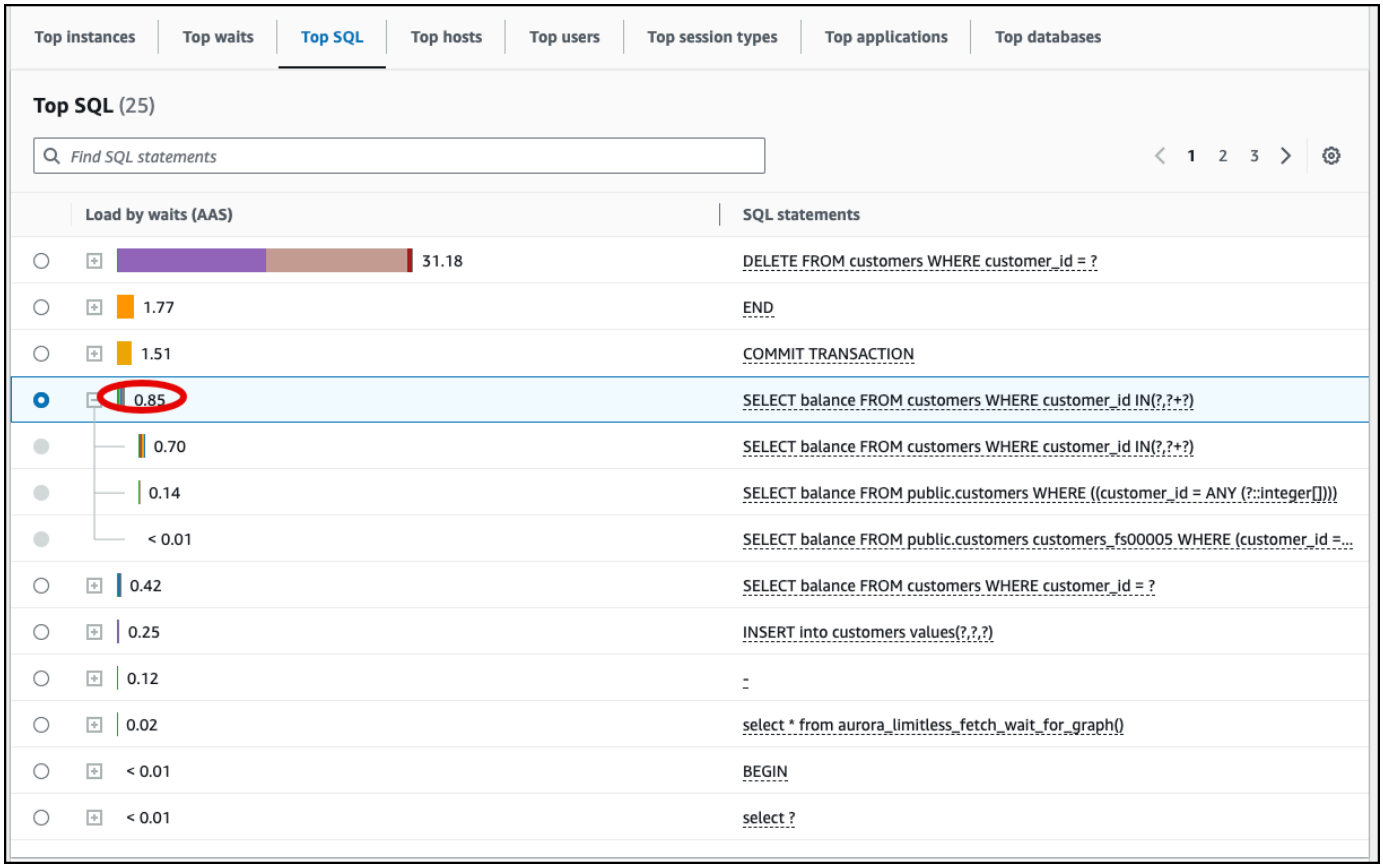


Analyzing load distribution for Aurora PostgreSQL Limitless Database using the Performance Insights dashboard

You might want to balance the load distribution for instances on your Aurora PostgreSQL Limitless Database. To analyze load distribution of the instances on an Aurora PostgreSQL Limitless Database, use the following procedure.

To analyze load distribution of the instances on an Aurora PostgreSQL Limitless Database using the console


1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Performance Insights**.
3. Choose an Aurora PostgreSQL Limitless Database. The Performance Insights dashboard is displayed for that Aurora PostgreSQL Limitless Database.
4. In the **Database load (DB load)** section, choose **Instances** for **Sliced by**. To view the number of AAS and the estimated vCPU for all instances in your Aurora PostgreSQL Limitless Database, choose **Absolute** for **Viewed as**.

The Average active sessions chart shows the DB load for instances in your Aurora PostgreSQL Limitless Database.

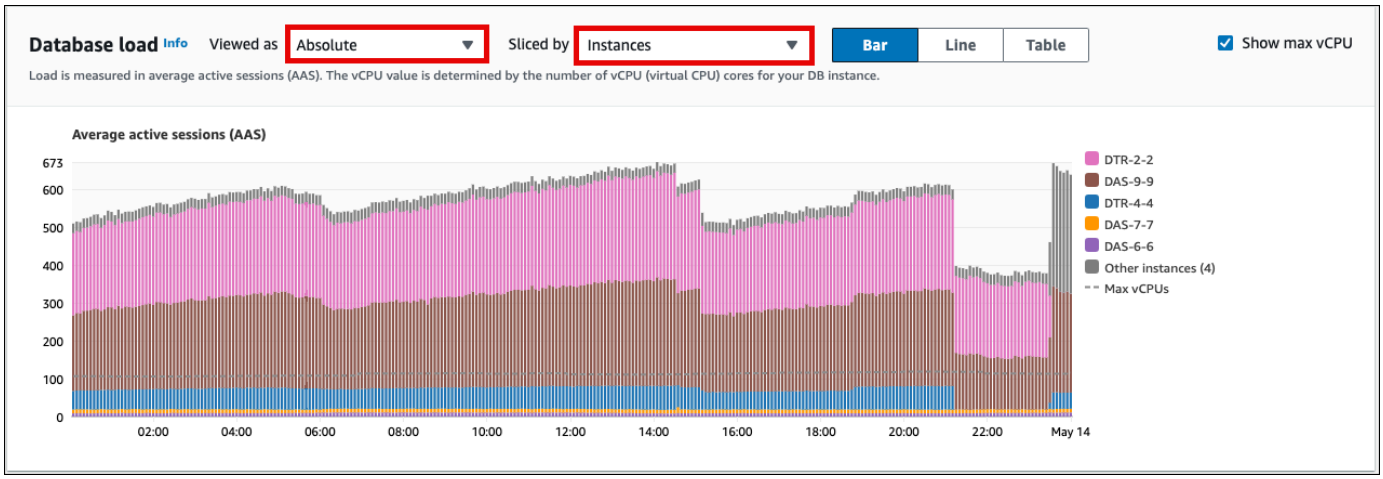

5. To see a chart of the load distribution of the instances in your Aurora PostgreSQL Limitless Database, choose the **Load distribution** tab.

   In the following example, the instance with the highest DB load is `DTR-2-2`.

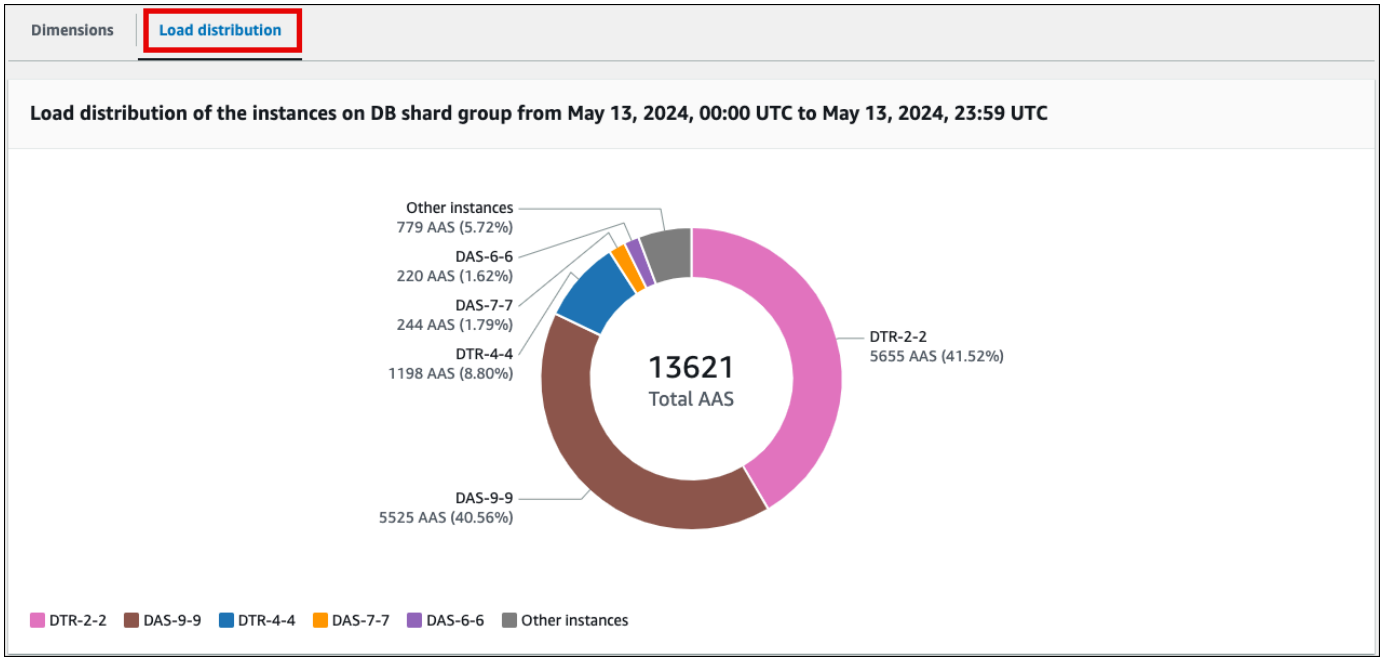

Monitoring Aurora PostgreSQL Limitless Database with Amazon GuardDuty RDS Protection

Amazon GuardDuty is a threat detection service that helps protect your accounts, containers, workloads, and the data within your Amazon environment. Using machine learning (ML) models, and anomaly and threat detection capabilities, GuardDuty continuously monitors different log sources and runtime activity to identify and prioritize potential security risks and malicious activities in your environment.

GuardDuty RDS Protection analyzes and profiles login events for potential access threats to your Amazon Aurora databases. When you turn on RDS Protection, GuardDuty consumes RDS login events from your Aurora databases. RDS Protection monitors these events and profiles them for potential insider threats or external actors.

For more information about GuardDuty RDS Protection in Aurora, see Monitoring threats with Amazon GuardDuty RDS Protectionfor Amazon Aurora.

For more information about enabling GuardDuty RDS Protection, see GuardDuty RDS Protection in the *Amazon GuardDuty User Guide*.

Functions and views for Aurora PostgreSQL Limitless Database

Aurora PostgreSQL Limitless Database has added functions and views. They're based on the corresponding Aurora PostgreSQL functions and views.

> **Note**
>
> Some statistics can return inconsistent results if there are transactions in progress.

Topics

- Aurora PostgreSQL Limitless Database functions
- Aurora PostgreSQL Limitless Database views

Aurora PostgreSQL Limitless Database functions

The following table shows the new functions for Aurora PostgreSQL Limitless Database.

> **Note**
>
> The functions listed in this table are located in the `rds_aurora` schema. When using a Limitless Database function, make sure to include the fully qualified object name: `rds_aurora.`*`object_name`*.

Aurora PostgreSQL Limitless Database function	Corresponding Aurora PostgreSQL function
limitless_backend_dsid	pg_backend_pid
limitless_cancel_session	pg_cancel_backend
limitless_stat_clear_snapshot	pg_stat_clear_snapshot
limitless_stat_database_size	pg_database_size
limitless_stat_get_snapshot_timestamp	pg_stat_get_snapshot_timestamp

Aurora PostgreSQL Limitless Database function	Corresponding Aurora PostgreSQL function
limitless_stat_prepared_xacts	pg_prepared_xacts
limitless_stat_relation_sizes	pg_indexes_size, pg_relation_size, pg_table_size, pg_total_relation_size
limitless_stat_reset	pg_stat_reset
limitless_stat_statements_reset	pg_stat_statements_reset
limitless_stat_system_waits	aurora_stat_system_waits
limitless_terminate_session	pg_terminate_backend
limitless_wait_report	aurora_wait_report

The following examples provide details about the Aurora PostgreSQL Limitless Database functions. For more information on PostgreSQL functions, see Functions and operators in the PostgreSQL documentation.

limitless_backend_dsid

The `limitless_backend_dsid` function returns the distributed session ID for the current session. A distributed session runs on a router in a DB shard group and involves backend processes on one or more shards in the DB shard group.

The following example shows how to use the `limitless_backend_dsid` function.

```
SELECT rds_aurora.limitless_backend_dsid();

limitless_backend_dsid
------------------------
8CACD7B04D0FC2A5
(1 row)
```

limitless_cancel_session

The `limitless_cancel_session` function works similarly to `pg_cancel_backend`, but it tries to cancel all backend processes related to the provided distributed session ID by sending a `SIGINT` (interruption signal).

The input parameter is the following:

- `distributed_session_id` (text) – The ID of the distributed session to be canceled.

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.
- `pid` (text) – The backend process ID.
- `success` (boolean) – Whether the cancellation was successful.

The following example shows how to use the `limitless_cancel_session` function.

```
SELECT * FROM rds_aurora.limitless_cancel_session('940CD5C81E3C796B');

 subcluster_id |  pid  | success
---------------+-------+---------
             1 | 26920 | t
(1 row)
```

limitless_stat_clear_snapshot

The `limitless_stat_clear_snapshot` function discards the current statistics snapshot or cached information on all nodes.

The following example shows how to use the `limitless_stat_clear_snapshot` function.

```
SELECT rds_aurora.limitless_stat_clear_snapshot();
```

limitless_stat_database_size

The `limitless_stat_database_size` function returns the sizes of a database in the DB shard group.

The input parameter is the following:

- dbname (name) – The database for which to get the sizes.

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.
- `subcluster_type` (text) – The type of subcluster to which this process belongs: `router` or `shard`.
- `db_size` – The size of the database in this subcluster in bytes.

The following example shows how to use the `limitless_stat_database_size` function.

```
SELECT * FROM rds_aurora.limitless_stat_database_size('postgres_limitless');

 subcluster_id | subcluster_type | db_size
---------------+-----------------+----------
             1 | router          |  8895919
             2 | router          |  8904111
             3 | shard           | 21929391
             4 | shard           | 21913007
             5 | shard           | 21831087
(5 rows)
```

limitless_stat_get_snapshot_timestamp

The `limitless_stat_get_snapshot_timestamp` function returns the timestamp of the current statistics snapshot, or `NULL` if no statistics snapshot has been taken. A snapshot is taken the first time cumulative statistics are accessed in a transaction if `stats_fetch_consistency` is set to `snapshot`. Returns a consolidated view of snapshot timestamps from all nodes. The `subcluster_id` and `subcluster_type` columns show which node the data is from.

The following example shows how to use the `limitless_stat_get_snapshot_timestamp` function.

```
SELECT * FROM rds_aurora.limitless_stat_get_snapshot_timestamp();

 subcluster_id | subcluster_type | snapshot_timestamp
---------------+-----------------+--------------------
             1 | router          |
             2 | router          |
             3 | shard           |
             4 | shard           |
             5 | shard           |
(5 rows)
```

limitless_stat_prepared_xacts

The `limitless_stat_prepared_xacts` function returns information about transactions on all nodes that are currently prepared for two-phase commit. For more information, see pg_prepared_xacts in the PostgreSQL documentation.

The following example shows how to use the `limitless_stat_prepared_xacts` function.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_stat_prepared_xacts;

 subcluster_id | subcluster_type | transaction_id |             gid              |
         prepared            |  owner_id  |    database_id
---------------+-----------------+----------------+------------------------------
+-------------------------------+------------+--------------------
 8             | shard           |        5815978 | 7_4599899_postgres_limitless |
 2024-09-03 15:51:17.659603+00 | auroraperf | postgres_limitless
 12            | shard           |        4599138 | 7_4599899_postgres_limitless |
 2024-09-03 15:51:17.659637+00 | auroraperf | postgres_limitless
(2 rows)
```

limitless_stat_relation_sizes

The `limitless_stat_relation_sizes` function returns the different sizes of a table in the DB shard group.

The input parameters are the following:

- `relnspname` (name) – The name of the schema containing the table.
- `relname` (name) – The name of the table.

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.
- `subcluster_type` (text) – The type of subcluster to which this process belongs: `router` or `shard`.
- `main_size` – The size in bytes of the main data fork in this node.
- `fsm_size` – The size in bytes of the free space map for the table in this node.
- `vm_size` – The size in bytes of the visibility map for the table in this node.
- `init_size` – The size in bytes of the initialization of the table in this node.
- `toast_size` – The size in bytes of the toast table associated with the table in this fork.

- `index_size` – The size in bytes of all of the indexes for the table in this node.
- `total_size` – The size in bytes of all of the segments of the table in this node.

The following example shows how to use the `limitless_stat_relation_sizes` function (some columns are omitted).

```
SELECT * FROM rds_aurora.limitless_stat_relation_sizes('public','customers');

 subcluster_id | subcluster_type | main_size | fsm_size | vm_size | toast_size |
 table_size | total_size
---------------+-----------------+-----------+----------+---------+------------
+------------+------------
             1 | router          |         0 |        0 |       0 |          0 |
   0 |          0
             2 | router          |         0 |        0 |       0 |          0 |
   0 |          0
             3 | shard           |   4169728 |  4177920 | 1392640 |    1392640 |
 11132928 |   11132928
             4 | shard           |   4169728 |  4177920 | 1392640 |    1392640 |
 11132928 |   11132928
             5 | shard           |   3981312 |  4227072 | 1409024 |    1409024 |
 11026432 |   11026432
(5 rows)
```

limitless_stat_reset

The `limitless_stat_reset` function resets all statistics counters for the current database to zero (0). If `track_functions` is enabled, the `stats_reset` column in `limitless_stat_database` shows the last time statistics were reset for the database. By default, `limitless_stat_reset` can be run only by a superuser. Other users can be granted permission by using the EXECUTE privilege.

The following example shows how to use the `limitless_stat_reset` function.

```
SELECT tup_inserted, tup_deleted FROM pg_stat_database
WHERE datname = 'postgres_limitless';

 tup_inserted | tup_deleted
--------------+-------------
          896 |           0
(1 row)
```

```
SELECT rds_aurora.limitless_stat_reset();

limitless_stat_reset
---------------------
(1 row)

SELECT tup_inserted, tup_deleted FROM pg_stat_database
WHERE datname = 'postgres_limitless';

tup_inserted | tup_deleted
-------------+-------------
           0 |           0
(1 row)
```

limitless_stat_statements_reset

The `limitless_stat_statements_reset` function discards statistics gathered so far by `limitless_stat_statements` corresponding to the specified `username`, `dbname`, `distributed_query_id`, and `queryid` parameters. If any of the parameters aren't specified, the default value `""` or `0` (invalid) is used for each of them, and the statistics that match with other parameters are reset. If no parameter is specified, or all the specified parameters are `""` or `0` (invalid), the function discards all statistics. If all statistics in the `limitless_stat_statements` view are discarded, the function also resets the statistics in the `limitless_stat_statements_info` view.

The input parameters are the following:

- `username` (name) – The user that queried the statement.
- `dbname` (name) – The database where the query was run.
- `distributed_query_id` (bigint) – The query ID of the parent query from the coordinator node. This column is `NULL` if it's the parent query. The coordinator node pushes down the distributed query ID to the participant nodes. So for the participant nodes, the values for distributed query ID and query ID are different.
- `queryid` (bigint) – The query ID of the statement.

The following example shows how to use the `limitless_stat_statements_reset` function to reset all of the statistics gathered by `limitless_stat_statements`.

```
SELECT rds_aurora.limitless_stat_statements_reset();
```

limitless_stat_system_waits

The `limitless_stat_system_waits` function returns a consolidated view of the wait event data from `aurora_stat_system_waits`, which reports system wide wait activity in an instance, from all nodes. The `subcluster_id` and `subcluster_type` columns show which node the data is from.

The following example shows how to use the `limitless_stat_system_waits` function.

```
postgres_limitless=> SELECT *
FROM rds_aurora.limitless_stat_system_waits() lssw, pg_catalog.aurora_stat_wait_event()
 aswe
WHERE lssw.event_id=aswe.event_id and aswe.event_name='LimitlessTaskScheduler';

 subcluster_id | subcluster_type | type_id | event_id  | waits  |  wait_time   |
 event_name
---------------+-----------------+---------+-----------+--------+--------------
+------------------------
             1 | router          |      12 | 201326607 | 677068 | 616942216307 |
 LimitlessTaskScheduler
             2 | router          |      12 | 201326607 | 678586 | 616939897111 |
 LimitlessTaskScheduler
             3 | shard           |      12 | 201326607 | 756640 | 616965545172 |
 LimitlessTaskScheduler
             4 | shard           |      12 | 201326607 | 755184 | 616958057620 |
 LimitlessTaskScheduler
             5 | shard           |      12 | 201326607 | 757522 | 616963183539 |
 LimitlessTaskScheduler
(5 rows)
```

limitless_terminate_session

The `limitless_terminate_session` function works similarly to `pg_terminate_backend`, but it tries to end all backend processes related to the provided distributed session ID by sending a `SIGTERM` (end signal).

The input parameter is the following:

- `distributed_session_id` (text) – The ID of the distributed session to be ended.

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.

- pid (text) – The backend process ID.
- success (boolean) – Whether the process was successfully ended.

The following example shows how to use the limitless_terminate_session function.

```
SELECT * FROM rds_aurora.limitless_terminate_session('940CD5C81E3C796B');

 subcluster_id |  pid  | success
---------------+-------+---------
             1 | 26920 | t
(1 row)
```

limitless_wait_report

The limitless_wait_report function returns the wait event activity over a period of time from all nodes. The subcluster_id and subcluster_type columns show which node the data is from.

The output parameters are the following:

- subcluster_id (text) – The ID of the subcluster to which this process belongs.
- subcluster_type (text) – The type of subcluster to which this process belongs: router or shard.

The rest of the columns are the same as in aurora_wait_report.

The following example shows how to use the limitless_wait_report function.

```
postgres_limitless=> select * from rds_aurora.limitless_wait_report();

 subcluster_id | subcluster_type | type_name | event_name | waits | wait_time |
 ms_per_wait | waits_per_xact | ms_per_xact
---------------+-----------------+-----------+------------+-------+-----------
+-------------+--------------- +-------------
             1 | router          | Client    | ClientRead |    57 | 741550.14 |
 13009.652 |           0.19 |    2505.237
             5 | shard           | Client    | ClientRead |    54 | 738897.68 |
 13683.290 |           0.18 |    2496.276
             4 | shard           | Client    | ClientRead |    54 | 738859.53 |
 13682.584 |           0.18 |    2496.147
             2 | router          | Client    | ClientRead |    53 | 719223.64 |
 13570.257 |           0.18 |    2429.810
```

```
             3 | shard           | Client    | ClientRead |    54 | 461720.40 |
8550.378 |           0.18 |    1559.86
```

Aurora PostgreSQL Limitless Database views

The following table shows the new views for Aurora PostgreSQL Limitless Database.

> **Note**
>
> The views listed in this table are located in the `rds_aurora` schema. When using a Limitless Database view, make sure to include the fully qualified object name: `rds_aurora.`*`object_name`*.

Aurora PostgreSQL Limitless Database view	Corresponding Aurora PostgreSQL view
limitless_database	pg_database
limitless_locks	pg_locks
limitless_stat_activity	pg_stat_activity
limitless_stat_all_indexes	pg_stat_all_indexes
limitless_stat_all_tables	pg_stat_all_tables
limitless_stat_database	pg_stat_database
limitless_stat_progress_vacuum	pg_stat_progress_vacuum
limitless_stat_statements	pg_stat_statements
limitless_stat_subclusters	None
limitless_stat_statements_info	pg_stat_statements_info
limitless_statio_all_indexes	pg_statio_all_indexes
limitless_statio_all_tables	pg_statio_all_tables
limitless_tables	pg_tables
limitless_table_collocations	None

Aurora PostgreSQL Limitless Database view	Corresponding Aurora PostgreSQL view
limitless_table_collocation_distributions	None

The following examples provide details about the Aurora PostgreSQL Limitless Database views. For more information on PostgreSQL views, see Viewing statistics in the PostgreSQL documentation.

> **Note**
>
> Some statistics views can return inconsistent results if you have ongoing transactions.

limitless_database

This view contains information about the available databases in the DB shard group. For example:

```
postgres_limitless=> SELECT subcluster_id, subcluster_type, oid, datname, datacl
 FROM rds_aurora.limitless_database;

 subcluster_id | subcluster_type |  oid  |      datname       |
                                 datacl

---------------+-----------------+-------+--------------------
+-------------------------------------------------------------------------------------------
 2             | router          |     4 | template0          | {=c/
rdsadmin,rdsadmin=CTc/rdsadmin}
 2             | router          |     5 | postgres           |
 2             | router          | 16384 | rdsadmin           |
 {rdsadmin=CTc/rdsadmin,rds_aurora_limitless_metadata_admin=c/
rdsadmin,rds_aurora_limitless_heat_mgmt_admin=c/rdsadmin}
 2             | router          | 16477 | postgres_limitless |
 2             | router          |     1 | template1          | {=c/
rdsadmin,rdsadmin=CTc/rdsadmin}
 6             | shard           |     4 | template0          | {=c/
rdsadmin,rdsadmin=CTc/rdsadmin}
```

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster (node)
- `subcluster_type` (text) – The type of subcluster (node), router or shard

The rest of the columns are the same as in `pg_database`.

limitless_locks

This view contains one row per process per node. It provides access to information about the locks held by active processes in the database server.

Example of creating a lock with two transactions

In this example, we run two transactions simultaneously on two routers.

```
# Transaction 1 (run on router 1)
BEGIN;
SET search_path = public;
SELECT * FROM customers;
INSERT INTO customers VALUES (400,'foo','bar');

# Transaction 2 (run on router 2)
BEGIN;
SET search_path = public;
ALTER TABLE customers ADD COLUMN phone VARCHAR;
```

The first transaction is run. Subsequent transactions have to wait until the first transaction is completed. Therefore the second transaction is blocked with a lock. To check the root cause of it, we run a command by joining `limitless_locks` with `limitless_stat_activity`.

```
# Run on router 2
SELECT distributed_session_id, state, usename, query, query_start
FROM rds_aurora.limitless_stat_activity
WHERE distributed_session_id in (
SELECT distributed_session_id
FROM rds_aurora.limitless_locks
WHERE relname = 'customers'
);

 distributed_session_id | state               | usename                 | query
                                    | query_start
------------------------+---------------------+-------------------------
+---------------------------------- -------------+-------------------------------
 47BDE66E9A5E8477       | idle in transaction | limitless_metadata_admin | INSERT INTO
 customers VALUES (400,'foo','bar'); | 2023-04-13 17:44:45.152244+00
 2AD7F370202D0FA9       | active              | limitless_metadata_admin | ALTER TABLE
 customers ADD COLUMN phone VARCHAR; | 2023-04-13 17:44:55.113388+00
```

```
 47BDE66E9A5E8477       |                     | limitless_auth_admin     |
 <insufficient privilege>                        |
 2AD7F370202D0FA9       |                     | limitless_auth_admin     |
 <insufficient privilege>                        |
 47BDE66E9A5E8477       |                     | limitless_auth_admin     |
 <insufficient privilege>                        |
 2AD7F370202D0FA9       |                     | limitless_auth_admin     |
 <insufficient privilege>                        |
(6 rows)
```

Example of creating a lock explicitly

In this example, we create a lock explicitly, then use the `limitless_locks` view to see the locks (some columns are omitted).

```
BEGIN;
SET search_path = public;
LOCK TABLE customers IN ACCESS SHARE MODE;
SELECT * FROM rds_aurora.limitless_locks WHERE relname = 'customers';

 subcluster_id | subcluster_type | distributed_session_id | locktype |      datname
   | relnspname |  relname  | virtualtransaction |  pid  |      mode
---------------+-----------------+------------------------+----------
+--------------------+------------+ ----------+--------------------+-------
+-----------------
             1 | router          | 7207702F862FC937       | relation |
 postgres_limitless | public     | customers | 28/600787          | 59564 |
 AccessShareLock
             2 | router          | 7207702F862FC937       | relation |
 postgres_limitless | public     | customers | 28/600405          | 67130 |
 AccessShareLock
             3 | shard           | 7207702F862FC937       | relation |
 postgres_limitless | public     | customers | 15/473401          | 27735 |
 AccessShareLock
             4 | shard           | 7207702F862FC937       | relation |
 postgres_limitless | public     | customers | 13/473524          | 27734 |
 AccessShareLock
             5 | shard           | 7207702F862FC937       | relation |
 postgres_limitless | public     | customers | 13/472935          | 27737 |
 AccessShareLock
             6 | shard           | 7207702F862FC937       | relation |
 postgres_limitless | public     | customers | 13/473015          | 48660 |
 AccessShareLock
```

```
(6 rows)
```

limitless_stat_activity

This view contains one row per process per node. It can be used to track overall system health and triage processes that are taking a long time. For example:

```
postgres=# SELECT
    subcluster_id,
    subcluster_type,
    distributed_session_id,
    distributed_session_state,
    datname,
    distributed_query_id,
    is_sso_query
FROM
    rds_aurora.limitless_stat_activity
WHERE
    distributed_session_id in ('D2470C97E3D07E06', '5A3CD7B8E5FD13FF')
    order by  distributed_session_id;

 subcluster_id | subcluster_type | distributed_session_id | distributed_session_state |
      datname       | distributed_query_id | is_sso_query
---------------+-----------------+------------------------+---------------------------
+-------------------+----------------------+-------------
 2             | router          | 5A3CD7B8E5FD13FF       | coordinator               |
 postgres_limitless |                      | f
 3             | shard           | 5A3CD7B8E5FD13FF       | participant               |
 postgres_limitless |  6808291725541680947 |
 4             | shard           | 5A3CD7B8E5FD13FF       | participant               |
 postgres_limitless |  6808291725541680947 |
 2             | router          | D2470C97E3D07E06       | coordinator               |
 postgres_limitless |                      | t
 3             | shard           | D2470C97E3D07E06       | participant               |
 postgres_limitless |  4058400544464210222 |
(5 rows)
```

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.
- `subcluster_type` (text) – The type of subcluster to which this process belongs: `router` or `shard`.

- `distributed_session_id` (text) – The ID of the distributed session to which this process belongs.
- `distributed_session_state` (text) – Whether this is a coordinator, participant, or standalone/nondistributed process (shown as `NULL`).
- `datname` (text) – The database to which this process is connected.
- `distributed_query_id` (bigint) – The query ID of the parent query from the coordinator node. This column is `NULL` if it's the parent query. The coordinator node pushes down the distributed query ID to the participant nodes. So for the participant nodes, the values for distributed query ID and query ID are different.
- `is_sso_query` (text) – This lets us know whether the query is single shard optimized or not.

The rest of the columns are the same as in `pg_stat_activity`.

limitless_stat_all_indexes

This view contains usage statistics on indexes in the DB shard group. For example:

```
postgres_limitless=> SELECT schemaname, relname, indexrelname, idx_scan
  FROM rds_aurora.limitless_stat_all_indexes
  WHERE relname LIKE 'orders_ts%' ORDER BY indexrelname LIMIT 10;

 schemaname |    relname     |    indexrelname     | idx_scan
------------+----------------+---------------------+----------
 ec_sample  | orders_ts00001 | orders_ts00001_pkey |   196801
 ec_sample  | orders_ts00002 | orders_ts00002_pkey |   196703
 ec_sample  | orders_ts00003 | orders_ts00003_pkey |   196376
 ec_sample  | orders_ts00004 | orders_ts00004_pkey |   197966
 ec_sample  | orders_ts00005 | orders_ts00005_pkey |   195301
 ec_sample  | orders_ts00006 | orders_ts00006_pkey |   195673
 ec_sample  | orders_ts00007 | orders_ts00007_pkey |   194475
 ec_sample  | orders_ts00008 | orders_ts00008_pkey |   191694
 ec_sample  | orders_ts00009 | orders_ts00009_pkey |   193744
 ec_sample  | orders_ts00010 | orders_ts00010_pkey |   195421
(10 rows)
```

limitless_stat_all_tables

This view contains statistics about all tables in the current database in the DB shard group. This is useful when tracking vacuum operations and Data Manipulation language (DML) operations. For example:

```
postgres_limitless=> SELECT subcluster_id, subcluster_type, relname,
 n_ins_since_vacuum, n_tup_ins, last_vacuum
  FROM rds_aurora.limitless_stat_all_tables
  WHERE relname LIKE 'orders_ts%' ORDER BY relname LIMIT 10;

 subcluster_id | subcluster_type |    relname     | n_ins_since_vacuum | n_tup_ins |
 last_vacuum
---------------+-----------------+----------------+--------------------+-----------
+-------------
 5             | shard           | orders_ts00001 |              34779 |    196083 |
 5             | shard           | orders_ts00002 |              34632 |    194721 |
 5             | shard           | orders_ts00003 |              34950 |    195965 |
 5             | shard           | orders_ts00004 |              34745 |    197283 |
 5             | shard           | orders_ts00005 |              34879 |    195754 |
 5             | shard           | orders_ts00006 |              34340 |    194605 |
 5             | shard           | orders_ts00007 |              33779 |    192203 |
 5             | shard           | orders_ts00008 |              33826 |    191293 |
 5             | shard           | orders_ts00009 |              34660 |    194117 |
 5             | shard           | orders_ts00010 |              34569 |    195560 |
(10 rows)
```

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.
- `subcluster_type` (text) – The type of subcluster to which this process belongs: `router` or `shard`.
- `relname` (name) – The name of the table.

The rest of the columns are the same as in `pg_stat_all_tables`.

limitless_stat_database

This view contains statistics about all databases in the DB shard group. Returns one row per database per node. For example:

```
postgres_limitless=> SELECT
    subcluster_id,
    subcluster_type,
    datname,
    blks_read,
    blks_hit
FROM
    rds_aurora.limitless_stat_database
```

```
WHERE
    datname='postgres_limitless';
 subcluster_id | subcluster_type |      datname       | blks_read | blks_hit
---------------+-----------------+--------------------+-----------+----------
             1 | router          | postgres_limitless |       484 | 34371314
             2 | router          | postgres_limitless |       673 | 33859317
             3 | shard           | postgres_limitless |      1299 | 17749550
             4 | shard           | postgres_limitless |      1094 | 17492849
             5 | shard           | postgres_limitless |      1036 | 17485098
             6 | shard           | postgres_limitless |      1040 | 17437257
(6 rows)
```

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.
- `subcluster_type` (text) – The type of subcluster to which this process belongs: `router` or `shard`.
- `datname` (name) – The name of the database.

The rest of the columns are the same as in `pg_stat_database`.

limitless_stat_progress_vacuum

This view contains information about ongoing vacuuming operations. For example:

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_stat_progress_vacuum;

-[ RECORD 1 ]----------+-----------------
subcluster_id          | 3
subcluster_type        | shard
distributed_session_id | A56D96E2A5C9F426
pid                    | 5270
datname                | postgres
nspname                | public
relname                | customer_ts2
phase                  | vacuuming heap
heap_blks_total        | 130500
heap_blks_scanned      | 100036
heap_blks_vacuumed     | 0
index_vacuum_count     | 0
max_dead_tuples        | 11184810
num_dead_tuples        | 0
```

```
-[ RECORD 2 ]----------+------------------
subcluster_id          | 3
subcluster_type        | shard
distributed_session_id | 56DF26A89EC23AB5
pid                    | 6854
datname                | postgres
nspname                | public
relname                | sales_ts1
phase                  | vacuuming heap
heap_blks_total        | 43058
heap_blks_scanned      | 24868
heap_blks_vacuumed     | 0
index_vacuum_count     | 0
max_dead_tuples        | 8569523
num_dead_tuples        | 0
```

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.
- `subcluster_type` (text) – The type of subcluster to which this process belongs: `router` or `shard`.
- `distributed_session_id` (text) – The identifier for the session that initiated the vacuuming operation.
- `datname` (name) – The database where the vacuuming is being done.
- `nspname` (name) – The name of the schema of the table that is being vacuumed. It's `null` if the table being vacuumed is not in the same database as the one to which the user is connected.
- `relname` (name) – The name of the table that is being vacuumed. It's `null` if the table being vacuumed is not in the same database as the one to which the user is connected.

The rest of the columns are the same as in `pg_stat_progress_vacuum`.

limitless_stat_statements

This view provides a means for tracking planning and running statistics of all SQL statements run on all nodes.

> **Note**
>
> You must install the pg_stat_statements extension to use the `limitless_stat_statements` view.

```
-- CREATE EXTENSION must be run by a superuser
CREATE EXTENSION pg_stat_statements;

-- Verify that the extension is created on all nodes in the DB shard group
SELECT distinct subcluster_id
    FROM rds_aurora.limitless_stat_statements
    LIMIT 10;
```

The following example shows the use of the `limitless_stat_statements` view.

```
postgres_limitless=> SELECT
 subcluster_id,
 subcluster_type,
 distributedqueryid,
 username,
 dbname,
 sso_calls
FROM
 rds_aurora.limitless_stat_statements;

 subcluster_id | subcluster_type |  distributedqueryid  |             username
       |       dbname       | sso_calls
---------------+-----------------+----------------------
+-------------------------------------+--------------------+-----------
 2             | router          |                      | postgres
       | postgres_limitless |         0
 2             | router          |                      | postgres
       | postgres_limitless |         0
 2             | router          |                      | postgres
       | postgres_limitless |         0
 2             | router          |                      | postgres
       | postgres_limitless |         0
 2             | router          |                      | postgres
       | postgres_limitless |         0
 2             | router          |                      | postgres
       | postgres_limitless |         1
 3             | shard           | -7975178695405682176 | postgres
       | postgres_limitless |
[...]
```

The output parameters are the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.
- `subcluster_type` (text) – The type of subcluster to which this process belongs: `router` for or `shard`.
- `distributedqueryid` (bigint) – The query ID of the parent query from the coordinator node. This column is `NULL` if it's the parent query. The coordinator node pushes down the distributed query ID to the participant nodes. So for the participant nodes, the values for distributed query ID and query ID are different.
- `username` (name) – The user that queried the statement.
- dbname (name) – The database where the query was run.
- `sso_calls` (name) – The number of times statement was single-shard optimized.

The rest of the columns are the same as in pg_stat_statements.

limitless_stat_statements_info

This view contains statistics for the `limitless_stat_statements` view. Each row contains data for the pg_stat_statements_info view from each node. The `subcluster_id` column identifies each node.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_stat_statements_info;

 subcluster_id | subcluster_type | dealloc |          stats_reset
---------------+-----------------+---------+-------------------------------
             1 | router          |       0 | 2023-06-30 21:22:09.524781+00
             2 | router          |       0 | 2023-06-30 21:21:40.834111+00
             3 | shard           |       0 | 2023-06-30 21:22:10.709942+00
             4 | shard           |       0 | 2023-06-30 21:22:10.740179+00
             5 | shard           |       0 | 2023-06-30 21:22:10.774282+00
             6 | shard           |       0 | 2023-06-30 21:22:10.808267+00
(6 rows)
```

The output parameter is the following:

- `subcluster_id` (text) – The ID of the subcluster to which this process belongs.

The rest of the columns are the same as in pg_stat_statements_info.

limitless_stat_subclusters

This view contains network statistics between routers and other nodes. It contains a row per pair of router and other node, for example:

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_stat_subclusters;

 orig_subcluster | orig_instance_az | dest_subcluster | dest_instance_az |
 latency_us |       latest_collection       | failed_requests | received_bytes |
 sent_bytes | same_az_requests | cross_az_requests |     stat_reset_timestamp
-----------------+------------------+-----------------+------------------
+------------+-------------------------------+-----------------+---------------
+------------+------------------+-------------------+------------------------------
 3               | us-west-2b       | 2               | us-west-2a       |
 847 | 2024-10-07 17:25:39.518617+00 |               0 |       35668633 |   92090171
 |                0 |            302787 | 2024-10-05 12:39:55.239675+00
 3               | us-west-2b       | 4               | us-west-2b       |
 419 | 2024-10-07 17:25:39.546376+00 |               0 |      101190464 |  248795719
 |           883478 |                 0 | 2024-10-05 12:39:55.231218+00
 3               | us-west-2b       | 5               | us-west-2c       |
    1396 | 2024-10-07 17:25:39.52122+00  |               0 |       72864849 |
 172086292 |                0 |            557726 | 2024-10-05 12:39:55.196412+00
 3               | us-west-2b       | 6               | us-west-2c       |
 729 | 2024-10-07 17:25:39.54828+00  |               0 |       35668584 |   92090171
 |                0 |            302787 | 2024-10-05 12:39:55.247334+00
 3               | us-west-2b       | 7               | us-west-2a       |
    1702 | 2024-10-07 17:25:39.545307+00 |               0 |       71699576 |
 171634844 |                0 |            556278 | 2024-10-05 12:39:52.715168+00
 2               | us-west-2a       | 3               | us-west-2b       |
 868 | 2024-10-07 17:25:40.293927+00 |               0 |       35659611 |   92011872
 |                0 |            302817 | 2024-10-05 12:39:54.420758+00
 2               | us-west-2a       | 4               | us-west-2b       |
 786 | 2024-10-07 17:25:40.296863+00 |               0 |      102437253 |  251838024
 |                0 |            895060 | 2024-10-05 12:39:54.404081+00
 2               | us-west-2a       | 5               | us-west-2c       |
    1232 | 2024-10-07 17:25:40.292021+00 |               0 |       71990027 |
 168828110 |                0 |            545453 | 2024-10-05 12:39:36.769549+00
```

The output parameters are the following:

- `orig_subcluster` (text) – The ID of the router where the communications originate
- `orig_subcluster_az` (text) – The Availability Zone (AZ) of the originator router
- `dest_subcluster` (text) – The ID of the destination node

- `dest_subcluster_az` (text) – The last collected AZ of the destination node
- `latency_us` (bigint) – The last collected network latency between nodes, in microseconds. The value is `0` if the node is unreachable.
- `latest_collection` (timestamp) – The timestamp of the latest collection of AZ and latency for the destination node
- `failed_requests` (bigint) – The cumulative count of failed internal requests
- `received_bytes` (bigint) – The estimated cumulative number of bytes received from this node
- `sent_bytes` (bigint) – The estimated cumulative number of bytes sent to this node
- `same_az_requests` (bigint) – The cumulative number of internal DB requests to this node when it's in the same AZ as the originator router
- `cross_az_requests` (bigint) – The cumulative number of internal DB requests to this node when it's in a different AZ from the originator router
- `stat_reset_timestamp` (timestamp) – The timestamp when the cumulative statistics for this view were last reset

limitless_statio_all_indexes

This view contains input/output (I/O) statistics for all indexes in the DB shard group. For example:

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_statio_all_indexes WHERE
 relname like'customers_ts%';

 subcluster_id | subcluster_type | schemaname |      relname      |
 indexrelname             | idx_blks_read | idx_blks_hit
---------------+-----------------+------------+-------------------
+-------------------------------------+ --------------+--------------
             3 | shard           | public     | customers_ts00002 |
 customers_ts00002_customer_name_idx |             1 |            0
             3 | shard           | public     | customers_ts00001 |
 customers_ts00001_customer_name_idx |             1 |            0
             4 | shard           | public     | customers_ts00003 |
 customers_ts00003_customer_name_idx |             1 |            0
             4 | shard           | public     | customers_ts00004 |
 customers_ts00004_customer_name_idx |             1 |            0
             5 | shard           | public     | customers_ts00005 |
 customers_ts00005_customer_name_idx |             1 |            0
```

```
             5 | shard           | public     | customers_ts00006 |
 customers_ts00006_customer_name_idx |             1 |           0
             6 | shard           | public     | customers_ts00007 |
 customers_ts00007_customer_name_idx |             1 |           0
             6 | shard           | public     | customers_ts00008 |
 customers_ts00008_customer_name_idx |             1 |           0
(8 rows)
```

limitless_statio_all_tables

This view contains input/output (I/O) statistics for all tables in the DB shard group. For example:

```
postgres_limitless=> SELECT
    subcluster_id,
    subcluster_type,
    schemaname,
    relname,
    heap_blks_read,
    heap_blks_hit
FROM
    rds_aurora.limitless_statio_all_tables
WHERE
    relname LIKE 'customers_ts%';

 subcluster_id | subcluster_type | schemaname |      relname      | heap_blks_read |
 heap_blks_hit
---------------+-----------------+------------+-------------------+----------------
+---------------
             3 | shard           | public     | customers_ts00002 |            305 |
      57780
             3 | shard           | public     | customers_ts00001 |            300 |
      56972
             4 | shard           | public     | customers_ts00004 |            302 |
      57291
             4 | shard           | public     | customers_ts00003 |            302 |
      57178
             5 | shard           | public     | customers_ts00006 |            300 |
      56932
             5 | shard           | public     | customers_ts00005 |            302 |
      57386
             6 | shard           | public     | customers_ts00008 |            300 |
      56881
             6 | shard           | public     | customers_ts00007 |            304 |
      57635
```

```
(8 rows)
```

limitless_tables

This view contains information about tables in Aurora PostgreSQL Limitless Database.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_tables;

 table_gid | local_oid | schema_name | table_name  | table_status | table_type  |
 distribution_key
-----------+-----------+-------------+-------------+--------------+-------------
+------------------
         5 |     18635 | public      | placeholder | active       | placeholder |
         6 |     18641 | public      | ref         | active       | reference   |
         7 |     18797 | public      | orders      | active       | sharded     | HASH
 (order_id)
         2 |     18579 | public      | customer    | active       | sharded     | HASH
 (cust_id)
(4 rows)
```

limitless_table_collocations

This view contains information about collocated sharded tables.

In the following example, the `orders` and `customers` tables are collocated, and the `users` and `followers` tables are collocated. Collocated tables have the same `collocation_id`.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_table_collocations ORDER BY
 collocation_id;

 collocation_id | schema_name | table_name
----------------+-------------+------------
              2 | public      | orders
              2 | public      | customers
              5 | public      | users
              5 | public      | followers
(4 rows)
```

limitless_table_collocation_distributions

This view shows the key distribution for each collocation.

```
postgres_limitless=> SELECT * FROM
 rds_aurora.limitless_table_collocation_distributions ORDER BY collocation_id,
 lower_bound;

 collocation_id | subcluster_id |     lower_bound      |     upper_bound
----------------+---------------+----------------------+----------------------
              2 |             6 | -9223372036854775808 | -4611686018427387904
              2 |             5 | -4611686018427387904 |                    0
              2 |             4 |                    0 |  4611686018427387904
              2 |             3 |  4611686018427387904 |  9223372036854775807
              5 |             6 | -9223372036854775808 | -4611686018427387904
              5 |             5 | -4611686018427387904 |                    0
              5 |             4 |                    0 |  4611686018427387904
              5 |             3 |  4611686018427387904 |  9223372036854775807
(8 rows)
```

Wait events for Aurora PostgreSQL Limitless Database

A wait event in Aurora PostgreSQL indicates a resource for which a session is waiting, such as input/output (I/O) and locks. Wait events are helpful in finding out why sessions are waiting for resources, and identifying bottlenecks. For more information, see Aurora PostgreSQL wait events.

Aurora PostgreSQL Limitless Database has its own wait events that are related to routers and shards. Many of them are for routers waiting on shards to complete tasks. Shard wait events contain details on tasks that are being performed.

Topics

- Querying for wait events
- Limitless Database wait events

Querying for wait events

You can use the limitless_stat_activity view to query for wait events, as shown in the following example.

```
SELECT wait_event FROM rds_aurora.limitless_stat_activity WHERE
 wait_event_type='AuroraLimitless';

      wait_event
----------------------
 RemoteStatementSetup
 RemoteStatementSetup
(2 rows)
```

You can also use the `aurora_stat_system_waits` function to list the number of waits and the total time spent on each wait event, as shown in the following example.

```
postgres_limitless=> SELECT type_name,event_name,waits,wait_time
    FROM aurora_stat_system_waits()
    NATURAL JOIN aurora_stat_wait_event()
    NATURAL JOIN aurora_stat_wait_type()
    WHERE type_name='AuroraLimitless'
    ORDER BY wait_time DESC;

    type_name    |       event_name          |  waits  |  wait_time
-----------------+---------------------------+---------+-------------
```

```
 AuroraLimitless | RemoteStatementSetup      |    7518 | 75236507897
 AuroraLimitless | RemoteStatementExecution  |      40 |      132986
 AuroraLimitless | Connect                   |       5 |        1453
(3 rows)
```

Limitless Database wait events

The following wait events apply to Aurora PostgreSQL Limitless Database. You can monitor these wait events to identify bottlenecks in Aurora PostgreSQL Limitless Database processing.

Topics

- IO:TwophaseFilePoolWrite wait event
- IO:TwophaseFilePoolRead wait event
- AuroraLimitless:Connect wait event
- AuroraLimitless:AsyncConnect wait event
- AuroraLimitless:RemoteStatementSetup wait event
- AuroraLimitless:RemoteDDLExecution wait event
- AuroraLimitless:RemoteStatementExecution wait event
- AuroraLimitless:FetchRemoteResults wait event
- AuroraLimitless:AsyncGetInitialResponse wait event
- AuroraLimitless:AsyncGetNextResponse wait event
- AuroraLimitless:AbortedCommandCleanup wait event
- AuroraLimitless:DistributedCommitPrepare wait event
- AuroraLimitless:DistributedCommit wait event
- AuroraLimitless:DistributedCommitPrepareThrottle wait event
- AuroraLimitless:PreparedTransactionResolution wait event
- AuroraLimitless:SendPreparedTransactionOutcome wait event
- AuroraLimitless:CommitClockBarrier wait event
- AuroraLimitless:SnapshotClockBarrier wait event
- AuroraLimitless:ReaderSnapshotClockBarrier wait event
- AuroraLimitless:GatherDistributedDeadlockGraph wait event
- AuroraLimitless:DistributedDeadlockDetection wait event
- AuroraLimitless:DistributedDeadlockAbort wait event

- AuroraLimitless:GatherRemoteStats wait event
- AuroraLimitless:GlobalSequenceRefresh wait event
- AuroraLimitless:GlobalVacuumTimeExchange wait event
- AuroraLimitless:DistributedTransactionMonitorGather wait event
- AuroraLimitlessActivity:AdminTaskSchedulerMain wait event
- AuroraLimitlessActivity:AdminTaskExecutorMain wait event
- AuroraLimitlessActivity:AdminTaskMonitorMain wait event
- AuroraLimitlessActivity:DatabaseCleanupMonitorMain wait event
- AuroraLimitlessActivity:TopologyCleanupMonitorMain wait event
- AuroraLimitlessActivity:ToplogyChangeMonitorMain wait event
- AuroraLimitlessActivity:DistributedTransactionMonitorMain wait event
- AuroraLimitlessActivity:GlobalVacuumMonitorMain wait event

IO:TwophaseFilePoolWrite wait event

Waiting for a write of a two-phase state file within the two-phase state file pool. This is an Aurora specific event.

Causes

Processes executing a `PREPARED TRANSACTION` command, including participants in a Limitless Database distributed transaction, must persist transaction state in a two-phase file. Aurora uses a file pool to improve performance of this operation.

Action

This is a synchronous write I/O operation and therefore a high latency in this event has similar causes to `IO:XactSync` and can be investigated in the same way. If using Limitless Database, you might need to reduce the number of distributed transactions being executed.

IO:TwophaseFilePoolRead wait event

Waiting for a read of a two-phase state file within the two-phase state file pool.

Causes

Processes executing a `COMMIT PREPARED` command against a previously prepared transaction, including participants in a Limitless Database distributed transaction, might need to read previosly

persisted transaction state from a two-phase file. Aurora uses a file pool to improve performance of this operation.

Action

This is a read I/O operation. Therefore, a high latency in this event has similar causes to `IO:DataFileRead` and can be investigated the same. If using Limitless Database, you might need to reduce the number of distributed transactions being executed.

AuroraLimitless:Connect wait event

The process is waiting for a connection to another node in the cluster to be established.

Causes

Connections are established between processes and remote nodes to execute queries, distributed transactions, and perform DDLs.

Action

Reduce the number of simultaneous connections to the cluster or tune the use of cross-shard queries.

AuroraLimitless:AsyncConnect wait event

This event is similar to `Connect`, but represents a process waiting for parallel connections to a set of nodes to be established.

Causes

Parallel connection establishment is most commonly done when executing DDL statements.

Action

Reduce the number of DDL statements or combine multiple DDLs in the same session to improve connection reuse.

AuroraLimitless:RemoteStatementSetup wait event

The process is waiting for remote query execution setup, such as cursor open, close, or prepared statement creation.

Causes

This wait event increases with the number of scans on sharded tables where the statement could not be single-shard optimized.

Action

Optimize queries to reduce the number of scan operations or increase eligibility for single-shard optimization.

AuroraLimitless:RemoteDDLExecution wait event

The process is waiting for a remote DDL command to finish.

Causes

When you issue a DDL command on a DB shard group, it must be distributed to other router and shard nodes before confirming the operation. Some DDL operations can run for a long time, because data must be adapted to schema changes.

Action

Identify long-running DDL commands so that you can optimize them.

AuroraLimitless:RemoteStatementExecution wait event

A process is waiting for a remote command to finish.

Causes

A SQL command is running on a remote node. This event will appear frequently for internal communications, such as `auto_analyze` and heartbeat checks.

Action

Idenfify long-running commands using the limitless_stat_statements view. In many cases this is an expected event, especially for background workers or internal processes and no action is needed.

AuroraLimitless:FetchRemoteResults wait event

A process is waiting to retrieve rows from a remote node.

Causes

This wait event can increase when fetching a large number of rows from a remote table, such as a sharded or reference table.

Action

Identify unoptimized SELECT queries using the `limitless_stat_statements` view. Optimize queries to retrieve only necessary data. You can also tune the `rds_aurora.limitless_maximum_adaptive_fetch_size` parameter.

AuroraLimitless:AsyncGetInitialResponse wait event

The process is waiting for an initial response when pipeline mode is used in query execution.

Causes

This will typically be seen during router to shard execution for queries with single-shard data placement and is an expected part of normal execution.

Action

No further action is required.

AuroraLimitless:AsyncGetNextResponse wait event

The process is waiting for an additional responses when pipeline mode is used in query execution.

Causes

This will typically be seen during router to shard execution for queries with single-shard data placement and is an expected part of normal execution.

Action

No further action is required.

AuroraLimitless:AbortedCommandCleanup wait event

The process is waiting for the result of a remote cleanup query. Cleanup queries are issued to shard nodes to return them to an appropriate state when a distributed transaction is ended.

Causes

Transaction cleanup is done when a transaction is aborted either because an error was found or because an user issued an explicit ABORT command or canceled the running query.

Action

Investigate the cause for the transaction being canceled.

AuroraLimitless:DistributedCommitPrepare wait event

The process is committing a distributed transaction and is waiting for all the participants to acknowledge the prepare command.

Causes

Transactions that modify multiple nodes must perform a distributed commit. A long wait in `DistributedCommitPrepare` could be caused by long waits in the `IO:TwophaseFilePoolWrite` event on participating nodes.

Action

Reduce the number of transactions that modify data on multiple nodes. Investigate `IO:TwophaseFilePoolWrite` events in other nodes of the cluster.

AuroraLimitless:DistributedCommit wait event

The process is committing a distributed transaction and is waiting for the lead participant to acknowledge the commit command.

Causes

Transactions that modify multiple nodes must perform a distributed commit. A long wait in `DistributedCommit` could be caused by long waits in the `IO:XactSync` event on the lead participant.

Action

Reduce the number of transactions that modify data on multiple nodes. Investigate `IO:XactSync` events in other nodes of the cluster.

AuroraLimitless:DistributedCommitPrepareThrottle wait event

The process is attempting to prepare a distributed transaction and is being throttled to due to existing prepared transactions.

Causes

Transactions that modify multiple nodes must perform a distributed commit. Participants in these transactions must perform a prepare operation as part of the commit protocol. Aurora limits the number of concurrent prepares, and if this limit is exceeded the process will wait in the `DistributedCommitPrepareThrottle` event.

Action

Reduce the number of transactions that modify data on multiple nodes. Investigate `IO:TwophaseFilePoolWrite` events as increased time in those events could cause existing prepared transactions to build up, resulting in throttling for new prepare attempts.

AuroraLimitless:PreparedTransactionResolution wait event

The process has encountered a tuple modified by a distributed transaction that is in the prepared state. The process must determine if the distributed transaction will become visible in its snapshot.

Causes

Transactions that modify multiple nodes must perform a distributed commit which includes a prepare phase. A high number of distributed transactions or increased latency on distributed commits can cause other processes to encounter the `PreparedTransactionResolution` wait event.

Action

Reduce the number of transactions that modify data on multiple nodes. Investigate distributed commit related events as increased time in those events could increase latency in the commit path of distributed transactions. You might also wish to investigate network and CPU loads.

AuroraLimitless:SendPreparedTransactionOutcome wait event

The process is executing on a node that is coordinating a distributed transaction and another process has inquired as to the state of that transaction, or the process has committed a distributed transaction and is sending the outcome to participants.

Causes

Processes that encounter the `PreparedTransactionResolution` wait event will query the transaction coordinator. The response on the transaction coordinator will ecounter SendPreparedTransactionOutcome.

Action

Reduce the number of transactions that modify data on multiple nodes. Investigate distributed commit related events and `IO:TwophaseFilePoolWrite` and `IO:TwophaseFilePoolRead` events as those events could increase latency in the commit path of distributed transactions. You might also wish to investigate network and CPU loads.

AuroraLimitless:CommitClockBarrier wait event

The process is committing a transaction and must wait to ensure that the assigned commit time is guaranteed to be in the past for all nodes in the cluster.

Causes

CPU or network staturation could cause increased clock drift, resulting in time spent in this wait event.

Action

Investigate CPU or network saturation in your cluster.

AuroraLimitless:SnapshotClockBarrier wait event

The process has received a snapshot time from another node with a clock in the future and is waiting for its own clock to reach that time.

Causes

This typically occurs after the process has received results from a function that was pushed down to a shard and there is clock drift between the nodes. CPU or network staturation could cause increased clock drift, resulting in time spent in this wait event.

Action

Investigate CPU or network saturation in your cluster.

AuroraLimitless:ReaderSnapshotClockBarrier wait event

This event occurs on read nodes. The process is waiting for the read node to replay the write stream so that all writes that happened before the process snapshot time have been applied.

Causes

An increase in Aurora replica lag can cause increased wait time in this event.

Action

Investigate Aurora replica lag.

AuroraLimitless:GatherDistributedDeadlockGraph wait event

The process is communicating with other nodes to collect lock graphs as part of distributed deadlock detection.

Causes

When a process is waiting on a lock it will perform a distributed deadlock check after waiting longer than `rds_aurora.limitless_distributed_deadlock_timeout`.

Action

Investigate causes of lock contention in your application and consider tuning `rds_aurora.limitless_distributed_deadlock_timeout`.

AuroraLimitless:DistributedDeadlockDetection wait event

The process is communicating with other nodes to detect a distributed deadlock.

Causes

When a process is waiting on a lock it will perform a distributed deadlock check after waiting longer than `rds_aurora.limitless_distributed_deadlock_timeout`.

Action

Investigate causes of lock contention in your application and consider tuning `rds_aurora.limitless_distributed_deadlock_timeout`.

AuroraLimitless:DistributedDeadlockAbort wait event

The process is communicating with another node to abort a session chosen as the victim in a distributed deadlock.

Causes

Application patterns are resulting in distributed deadlocks.

Action

Investigate application patterns resulting in distributed deadlocks.

AuroraLimitless:GatherRemoteStats wait event

The process is gathering statistics from other nodes in the cluster.

Causes

Monitoring or activty queries and views, such as `limitless_stat_activity`, will retrieve statistics from other nodes.

Action

No further action is required.

AuroraLimitless:GlobalSequenceRefresh wait event

The process is generating a new sequence value and must request a new chunk from the global sequence.

Causes

A high rate of sequence value generation can result in stalls in this event if `rds_aurora.limitless_sequence_chunk_size` is insufficient.

Action

This is a normal occurrence. If you see excessive time in this event consider tuning `rds_aurora.limitless_sequence_chunk_size`. See documentation on sequences in Limitless Database.

AuroraLimitless:GlobalVacuumTimeExchange wait event

The process is exchanging snapshot data to support vacuum.

Causes

Nodes in Limitless Database exchange oldest active snapshot time data with other nodes to compute the correct cutoff time for vacuum execution.

Action

No further action is required.

AuroraLimitless:DistributedTransactionMonitorGather wait event

The process is gathering transaction metadata from other nodes to support distributed transaction cleanup.

Causes

Nodes in Limitless Database exchange transaction metadata with other nodes to determine when distributed transaction state can be purged.

Action

No further action is required.

AuroraLimitlessActivity:AdminTaskSchedulerMain wait event

Waiting in main loop of task scheduler process.

AuroraLimitlessActivity:AdminTaskExecutorMain wait event

Waiting in main loop of task executor process.

AuroraLimitlessActivity:AdminTaskMonitorMain wait event

Waiting in main loop of task monitor process.

AuroraLimitlessActivity:DatabaseCleanupMonitorMain wait event

Waiting in main loop of database cleanup monitor process.

AuroraLimitlessActivity:TopologyCleanupMonitorMain wait event

Waiting in main loop of topology cleanup monitor process.

AuroraLimitlessActivity:ToplogyChangeMonitorMain wait event

Waiting in main loop of topology change monitor process.

AuroraLimitlessActivity:DistributedTransactionMonitorMain wait event

Waiting in main loop of distributed transaction monitor process.

AuroraLimitlessActivity:GlobalVacuumMonitorMain wait event

Waiting in main loop of global vacuum monitor process.

Building for efficiency with functions

User-defined functions are not single-shard optimized by default, but they can be configured to execute as single-shard operations. Functions can encapsulate logic and ensure it is executed in a single-shard optimized manner.

Why single-shard operations are important

Resource utilization is important for performance and cost efficiency. Single-shard operations use significantly fewer resources compared to cross-shard operations. For example, when executing a function to insert one million rows, single-shard execution uses approximately 90.5 ACUs compared to 126.5 ACUs for cross-shard execution—a 35% improvement in resource efficiency.

Single-shard execution also provides:

- 35% higher throughput than cross-shard operations
- More predictable response times
- Better scalability as data grows

Single-shard operations and functions

Functions execute on shards when either of these prerequisites are met:

- The function is created as immutable and included in a single-shard optimized query
- The function is distributed by a user

Functions that execute on shards perform and scale better because they execute where the data is located.

Functions and volatility

To check a function's volatility, use this query on PostgreSQL's system tables:

```
SELECT DISTINCT nspname, proname, provolatile
FROM pg_proc PRO
JOIN pg_namespace NSP ON PRO.pronamespace = NSP.oid
WHERE proname IN ('random', 'md5');
```

Example output:

```
  nspname   | proname | provolatile
------------+---------+-------------
 pg_catalog | md5     | i
 pg_catalog | random  | v
(2 rows)
```

In this example, `md5()` is immutable and `random()` is volatile. This means that a single-shard optimized statement that includes `md5()` remains single-shard optimized, while a statement that includes `random()` does not.

Example with immutable function:

```
EXPLAIN ANALYZE
SELECT pg_catalog.md5('123')
FROM s1.t1
WHERE col_a = 776586194
  AND col_b = 654849524
  AND col_c = '3ac2f2affb02987159ccd6ebd23e1ae5';
```

```
                          QUERY PLAN
-----------------------------------------------------
 Foreign Scan  (cost=100.00..101.00 rows=100 width=0)
               (actual time=3.409..3.409 rows=1 loops=1)
 Single Shard Optimized
 Planning Time: 0.313 ms
 Execution Time: 4.253 ms
(4 rows)
```

Example with volatile function:

```
EXPLAIN ANALYZE
SELECT pg_catalog.random()
FROM s1.t1
WHERE col_a = 776586194
  AND col_b = 654849524
  AND col_c = '3ac2f2affb02987159ccd6ebd23e1ae5';
```

```
                          QUERY PLAN
-----------------------------------------------------
 Foreign Scan on t1_fs00001 t1
```

```
   (cost=100.00..15905.15 rows=1 width=8)
   (actual time=0.658..0.658 rows=1 loops=1)
 Planning Time: 0.263 ms
 Execution Time: 2.892 ms
(3 rows)
```

The output shows that `md5()` is pushed down and executed as single-shard optimized, while `random()` is not.

Distributing functions

A function that accesses data on only one shard should execute on that shard to gain performance benefits. The function must be distributed, and the function signature must include the complete shard key—all columns in the shard key must be passed as parameters to the function.

Example function:

```
CREATE OR REPLACE FUNCTION s1.func1(
    param_a bigint,
    param_b bigint,
    param_c char(100)
)
RETURNS int AS $$
DECLARE
    res int;
BEGIN
    SELECT COUNT(*) INTO res
    FROM s1.t1
    WHERE s1.t1.col_a = param_a
      AND s1.t1.col_b = param_b
      AND s1.t1.col_c = param_c;

    RETURN res;
END
$$ LANGUAGE plpgsql;
```

Before distribution, the function is not single-shard optimized:

```
EXPLAIN ANALYZE
SELECT * FROM s1.func1(776586194, 654849524, '3ac2f2affb02987159ccd6ebd23e1ae5');
```

```
                                                QUERY PLAN
```

```
-------------------------------------------------------------------------------------------------
 Function Scan on func1  (cost=0.25..0.26 rows=1 width=4)
                         (actual time=37.503..37.503 rows=1 loops=1)
 Planning Time: 0.901 ms
 Execution Time: 51.647 ms
(3 rows)
```

To distribute the function:

```
SELECT rds_aurora.limitless_distribute_function(
    's1.func1(bigint,bigint,character)',
    ARRAY['param_a','param_b','param_c'],
    's1.t1'
);
```

After distribution, the function is single-shard optimized:

```
EXPLAIN ANALYZE
SELECT * FROM s1.func1(776586194, 654849524, '3ac2f2affb02987159ccd6ebd23e1ae5');
```

```
                                        QUERY PLAN
-------------------------------------------------------------------------------------------------
 Foreign Scan  (cost=100.00..101.00 rows=100 width=0)
               (actual time=4.332..4.333 rows=1 loops=1)
 Single Shard Optimized
 Planning Time: 0.857 ms
 Execution Time: 5.116 ms
(4 rows)
```

You can confirm single-shard optimization by checking the `sso_calls` column in `rds_aurora.limitless_stat_statements`:

```
subcluster_id | subcluster_type | calls | sso_calls |               query
--------------+-----------------+-------+-----------
+-------------------------------------
 2            | router          |     2 |         1 | SELECT * FROM s1.func1( $1, $2,
 $3 )
 3            | router          |     1 |         1 | SELECT * FROM s1.func1( $1, $2,
 $3 )
(2 rows)
```

Functions and efficiency patterns

Executing logic close to the data is more efficient, and functions play a key role in achieving this. There are two main use cases for improving efficiency with functions:

1. Extracting shard key from complex data to invoke a separate single-shard optimized function
2. Turning cross-shard workloads into single-shard optimized by separating cross-shard logic from single-shard optimized statements

Extracting shard key from complex data

Consider a function with signature `s3.func3(p_json_doc json)` that performs several database operations. These operations will execute across all shards within a transaction that spans all shards. If the JSON document contains the shard key, you can build a single-shard optimized function to perform the database operations.

Original pattern:

```
s3.func3(p_json_doc json)
    database operation 1;
    database operation 2;
    database operation 3;
```

Optimized pattern:

```
s3.func3(p_json_doc json)
DECLARE
    v_a bigint;
BEGIN
    v_a := (p_json_doc->>'field_a')::bigint;
    SELECT s3.func3_INNER(v_a, p_json_doc);
END;
```

Where the inner function does:

```
s3.func3_INNER(p_a, p_json_doc)
    database operation 1 WHERE shard_key = p_a;
    database operation 2 WHERE shard_key = p_a;
    database operation 3 WHERE shard_key = p_a;
```

In this pattern, the shard key is encapsulated in a complex datatype or deducible from other parameters. Logic, data access, and functions can determine, extract, or construct the shard key, then invoke a single-shard optimized function that performs operations concerning only a single shard. Since the application interface doesn't change, optimization is comparatively easy to test.

Deferring shard key from other functions or data

Another design pattern applies when logic or data access calculates or determines the shard key. This is useful when a function can be executed on a single shard for most invocations, but occasionally requires cross-shard execution.

Original pattern:

```
NEWORD(INTEGER, …) RETURNS NUMERIC
DECLARE
    all_whid_local := true;
    LOOP through the order lines
        Generate warehouse ID;
        IF generated warehouse ID == input warehouse ID
        THEN
            ol_supply_whid := input warehouse ID;
        ELSE
            all_whid_local := false;
            ol_supply_whid := generated warehouse ID;
        END IF;
        …
    END LOOP;
    …
    RETURN no_s_quantity;
```

Optimized pattern with separate functions:

```
CREATE OR REPLACE FUNCTION NEWORD_sso(no_w_id INTEGER, …)
RETURNS NUMERIC
…
    RETURN no_s_quantity;
    …
END;
LANGUAGE 'plpgsql';

SELECT rds_aurora.limitless_distribute_function(
    'NEWORD_sso(int,…)',
```

```
    ARRAY['no_w_id'],
    'warehouse'
);

CREATE OR REPLACE FUNCTION NEWORD_crosshard(no_w_id INTEGER, …)
RETURNS NUMERIC
…
    RETURN no_s_quantity;
    …
END;
LANGUAGE 'plpgsql';
```

Then have the main function call either the single-shard optimized or cross-shard version:

```
IF all_whid_local THEN
    SELECT NEWORD_sso(…) INTO no_s_quantity;
ELSE
    SELECT NEWORD_crosshard(…) INTO no_s_quantity;
END IF;
```

This approach allows the majority of invocations to benefit from single-shard optimization while maintaining correct behavior for cases that require cross-shard execution.

Checking for single-shard operations

Use EXPLAIN to verify whether a statement is single-shard optimized. The output explicitly reports "Single Shard Optimized" for optimized operations.

Cross-shard invocation before distribution:

```
                       QUERY PLAN
-------------------------------------------------------------------
 Function Scan on func1  (cost=0.25..0.26 rows=1 width=4)
                         (actual time=59.622..59.623 rows=1 loops=1)
 Planning Time: 0.925 ms
 Execution Time: 60.211 ms
```

Single-shard invocation after distribution:

```
                       QUERY PLAN
-------------------------------------------------------------------
```

```
Foreign Scan  (cost=100.00..101.00 rows=100 width=0)
              (actual time=4.576..4.577 rows=1 loops=1)
Single Shard Optimized
Planning Time: 1.483 ms
Execution Time: 5.404 ms
```

The difference in execution times demonstrates the performance benefit of single-shard optimization.

Backing up and restoring Aurora PostgreSQL Limitless Database

You can back up and restore a DB cluster that uses Aurora PostgreSQL Limitless Database.

Contents

- Backing up a DB cluster that uses Aurora PostgreSQL Limitless Database
  - Creating a DB cluster snapshot
- Restoring a DB cluster that uses Aurora PostgreSQL Limitless Database
  - Restoring a DB cluster from a DB snapshot
  - Restoring a DB cluster using point-in-time recovery
- PostgreSQL backup and restore utilities not supported

Backing up a DB cluster that uses Aurora PostgreSQL Limitless Database

Backing up a DB cluster with Aurora PostgreSQL Limitless Database has similarities and differences in functionality compared to backing up a standard Aurora DB cluster.

- When you take a manual DB cluster snapshot of an Aurora DB cluster that uses Limitless Database, the snapshot includes data from the DB shard group.
- Continuous backups include data from the DB shard group.
- Automated daily snapshots include data from the DB shard group.
- Copying DB cluster snapshots is supported. For more information, see DB cluster snapshot copying.
- Sharing DB cluster snapshots is supported. For more information, see Sharing a DB cluster snapshot.
- You can't use the `pg_dump` or `pg_dumpall` utility to back up databases in the DB shard group.
- Taking final snapshots when deleting DB clusters is supported for Aurora PostgreSQL Limitless Database.
- Retaining automated backups when deleting DB clusters isn't supported for Aurora PostgreSQL Limitless Database.

Creating a DB cluster snapshot

You create an Aurora PostgreSQL Limitless Database DB cluster snapshot in the same way as for a standard Aurora DB cluster, as shown in the following Amazon CLI example:

```
aws rds create-db-cluster-snapshot \
    --db-cluster-identifier my-db-cluster \
    --db-cluster-snapshot-identifier my-db-cluster-snapshot
```

For more information on backing up DB clusters, see Overview of backing up and restoring an Aurora DB cluster.

Restoring a DB cluster that uses Aurora PostgreSQL Limitless Database

Restoring a DB cluster with Aurora PostgreSQL Limitless Database has similarities and differences in functionality compared to restoring a standard Aurora DB cluster.

- You can restore a Limitless Database DB cluster only from a source DB cluster that uses a DB engine version compatible with Limitless Database, such as `16.4-limitless`.
- When you restore a DB cluster from a manual snapshot of a DB cluster that uses Limitless Database, the entire DB cluster storage is restored. This includes the storage of the DB shard group.

  You must create a DB shard group to access the storage for your Limitless Database.
- You can restore a DB cluster using point-in-time recovery (PITR) to any point within the retention period. The restored DB cluster includes the storage of the DB shard group.

  You must create a DB shard group to access the storage for your Limitless Database.
- PITR isn't supported for deleted Aurora PostgreSQL Limitless Database DB clusters.
- When you restore a DB cluster from an automated daily snapshot, the storage for the DB shard group is also restored.
- When you restore an Aurora PostgreSQL Limitless Database DB cluster, you must enable Enhanced Monitoring and Performance Insights. Make sure to include the Performance Insights KMS key ID.

After you restore an Aurora PostgreSQL Limitless Database DB cluster, make sure to verify its functionality by running your queries on it.

Restoring a DB cluster from a DB snapshot

The following Amazon CLI examples show how to restore an Aurora PostgreSQL Limitless Database DB cluster from a DB cluster snapshot.

You must use the `16.4-limitless` DB engine version.

To restore a Limitless Database DB cluster from a DB cluster snapshot

1. Restore the DB cluster:

```
aws rds restore-db-cluster-from-snapshot \
    --db-cluster-identifier my-new-db-cluster \
    --snapshot-identifier my-db-cluster-snapshot \
    --engine aurora-postgresql \
    --engine-version 16.4-limitless \
    --enable-performance-insights \
    --performance-insights-retention-period 31 \
    --performance-insights-kms-key-id arn:aws-cn:kms:us-
east-1:123456789012:key/1234abcd-12ab-34cd-56ef-1234567890ab \
    --monitoring-interval 5 \
    --monitoring-role-arn arn:aws-cn:iam::123456789012:role/EMrole
```

2. Create the DB shard group:

```
aws rds create-db-shard-group \
    --db-cluster-identifier my-new-db-cluster \
    --db-shard-group-identifier my-new-DB-shard-group \
    --max-acu 1000
```

   For more information, see Adding a DB shard group to an existing Aurora PostgreSQL Limitless Database DB cluster.

For more information on restoring Aurora DB clusters from DB cluster snapshots, see Restoring from a DB cluster snapshot.

Restoring a DB cluster using point-in-time recovery

The following Amazon CLI examples show how to restore an Aurora PostgreSQL Limitless Database DB cluster using point-in-time recovery (PITR).

To restore a Limitless Database DB cluster using PITR

1. Restore the DB cluster:

```
aws rds restore-db-cluster-to-point-in-time \
    --source-db-cluster-identifier my-db-cluster \
    --db-cluster-identifier my-new-db-cluster \
    --use-latest-restorable-time \
    --enable-performance-insights \
    --performance-insights-retention-period 31 \
    --performance-insights-kms-key-id arn:aws-cn:kms:us-
east-1:123456789012:key/1234abcd-12ab-34cd-56ef-1234567890ab \
    --monitoring-interval 5 \
    --monitoring-role-arn arn:aws-cn:iam::123456789012:role/EMrole
```

2. Create the DB shard group:

```
aws rds create-db-shard-group \
    --db-cluster-identifier my-new-db-cluster \
    --db-shard-group-identifier my-new-DB-shard-group \
    --max-acu 1000
```

   For more information, see Adding a DB shard group to an existing Aurora PostgreSQL Limitless Database DB cluster.

For more information on PITR, see Restoring a DB cluster to a specified time.

PostgreSQL backup and restore utilities not supported

The following PostgreSQL utilities aren't supported for either the primary DB cluster or the DB shard group:

- `pg_dump`
- `pg_dumpall`
- `pg_restore`

While you might be able to use them by open source binaries or alternative methods, doing so could yield inconsistent results.

Upgrading Amazon Aurora PostgreSQL Limitless Database

The following apply to upgrading Aurora PostgreSQL Limitless Database:

- Minor version upgrades are supported.
- Patching Aurora PostgreSQL Limitless Database is supported. Patches appear as pending maintenance to be applied during your maintenance window.

Upgrading DB clusters that use Amazon Aurora PostgreSQL Limitless Database

You upgrade a DB cluster by modifying it and choosing a new DB engine version. You can use the Amazon Web Services Management Console or the Amazon CLI.

Console

To upgrade your Limitless Database DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Navigate to the **Databases** page.
3. Select the Limitless Database DB cluster that you want to upgrade.
4. Choose **Modify**.

   The **Modify DB cluster** page displays.
5. For **DB engine version**, choose the new DB engine version, for example **Aurora PostgreSQL with Limitless Database (Compatible with PostgreSQL 16.6)**.
6. Choose **Continue**.
7. On the summary page, select whether to apply the changes immediately or during the next scheduled maintenance window, then choose **Modify cluster**.

CLI

Use the modify-db-cluster Amazon CLI command, as shown in the following example.

```
aws rds modify-db-cluster \
    --db-cluster-identifier my-sv2-cluster \
    --engine-version 16.6-limitless \
    --apply-immediately
```

Aurora PostgreSQL Limitless Database reference

We provide the following reference topics for Aurora PostgreSQL Limitless Database.

Topics

- Supported and unsupported Data Definition Language (DDL) SQL commands
- DDL limitations and other information for Aurora PostgreSQL Limitless Database
- Supported and unsupported Data Manipulation Language (DML) and query processing SQL commands
- DML limitations and other information for Aurora PostgreSQL Limitless Database
- Variables in Aurora PostgreSQL Limitless Database
- DB cluster parameters in Aurora PostgreSQL Limitless Database

Supported and unsupported Data Definition Language (DDL) SQL commands

The following table lists the DDL commands that are supported and not supported by Aurora PostgreSQL Limitless Database, with references to limitations or more information.

Command	Supported?	Limitations or more information
ALTER AGGREGATE	No	Not applicable
ALTER COLLATION	Yes	None
ALTER CONVERSION	Yes	None
ALTER DATABASE	No	Not applicable
ALTER DEFAULT PRIVILEGES	No	Not applicable
ALTER DOMAIN	No	Not applicable
ALTER EVENT TRIGGER	No	Not applicable
ALTER EXTENSION	Yes	Extensions

Command	Supported?	Limitations or more information
ALTER FOREIGN DATA WRAPPER	No	Not applicable
ALTER FOREIGN TABLE	No	Not applicable
ALTER FUNCTION	Yes	Functions
ALTER GROUP	Yes	None
ALTER INDEX	Yes	None
ALTER LANGUAGE	No	Not applicable
ALTER LARGE OBJECT	No	Not applicable
ALTER MATERIALIZED VIEW	No	Not applicable
ALTER OPERATOR	Yes	None
ALTER OPERATOR CLASS	Yes	None
ALTER OPERATOR FAMILY	Yes	None
ALTER POLICY	No	Not applicable
ALTER PROCEDURE	Yes	None
ALTER PUBLICATION	No	Not applicable
ALTER ROLE	Yes	None
ALTER ROUTINE	No	Not applicable
ALTER RULE	No	Not applicable
ALTER SCHEMA	Yes	None
ALTER SEQUENCE	Yes	Sequences

Command	Supported?	Limitations or more information
ALTER SERVER	No	Not applicable
ALTER STATISTICS	No	Not applicable
ALTER SUBSCRIPTION	No	Not applicable
ALTER SYSTEM	No	Not applicable
ALTER TABLE	Yes	ALTER TABLE
ALTER TABLESPACE	No	Not applicable
ALTER TEXT SEARCH CONFIGURATION	No	Not applicable
ALTER TEXT SEARCH DICTIONARY	No	Not applicable
ALTER TEXT SEARCH PARSER	No	Not applicable
ALTER TEXT SEARCH TEMPLATE	No	Not applicable
ALTER TRIGGER	No	Not applicable
ALTER TYPE	Yes	None
ALTER USER	Yes	None
ALTER USER MAPPING	No	Not applicable
ALTER VIEW	Yes	None
COMMENT	No	Not applicable
CREATE ACCESS METHOD	No	Not applicable
CREATE AGGREGATE	No	Not applicable

Command	Supported?	Limitations or more information
CREATE CAST	Yes	None
CREATE COLLATION	Yes	None
CREATE CONVERSION	Yes	None
CREATE DATABASE	Yes	CREATE DATABASE
CREATE DOMAIN	No	Not applicable
CREATE EVENT TRIGGER	No	Not applicable
CREATE EXTENSION	Yes	Extensions
CREATE FOREIGN DATA WRAPPER	No	Not applicable
CREATE FOREIGN TABLE	No	Not applicable
CREATE FUNCTION	Yes	Functions
CREATE GROUP	Yes	None
CREATE INDEX	Yes	CREATE INDEX
CREATE LANGUAGE	No	Not applicable
CREATE MATERIALIZED VIEW	No	Not applicable
CREATE OPERATOR	Yes	None
CREATE OPERATOR CLASS	Yes	None
CREATE OPERATOR FAMILY	Yes	None
CREATE POLICY	Yes	None
CREATE PROCEDURE	Yes	None

Command	Supported?	Limitations or more information
CREATE PUBLICATION	No	Not applicable
CREATE ROLE	Yes	None
CREATE RULE	No	Not applicable
CREATE SCHEMA	Yes	CREATE SCHEMA
CREATE SEQUENCE	Yes	Sequences
CREATE SERVER	No	Not applicable
CREATE STATISTICS	No	Not applicable
CREATE SUBSCRIPTION	No	Not applicable
CREATE TABLE	Yes	CREATE TABLE
CREATE TABLE AS	Yes	CREATE TABLE AS
CREATE TABLESPACE	No	Not applicable
CREATE TEMPORARY TABLE	No	Not applicable
CREATE TEMPORARY TABLE AS	No	Not applicable
CREATE TEXT SEARCH CONFIGURATION	No	Not applicable
CREATE TEXT SEARCH DICTIONARY	No	Not applicable
CREATE TEXT SEARCH PARSER	No	Not applicable
CREATE TEXT SEARCH TEMPLATE	No	Not applicable

Command	Supported?	Limitations or more information
CREATE TRANSFORM	No	Not applicable
CREATE TRIGGER	No	Not applicable
CREATE TYPE	Yes	None
CREATE USER	Yes	None
CREATE USER MAPPING	No	Not applicable
CREATE VIEW	Yes	None
DROP ACCESS METHOD	No	Not applicable
DROP AGGREGATE	Yes	None
DROP CAST	Yes	None
DROP COLLATION	Yes	None
DROP CONVERSION	Yes	None
DROP DATABASE	Yes	DROP DATABASE
DROP DOMAIN	No	Not applicable
DROP EVENT TRIGGER	No	Not applicable
DROP EXTENSION	Yes	Extensions
DROP FOREIGN DATA WRAPPER	No	Not applicable
DROP FOREIGN TABLE	No	Not applicable
DROP FUNCTION	Yes	Functions
DROP GROUP	Yes	None

Command	Supported?	Limitations or more information
DROP INDEX	Yes	None
DROP LANGUAGE	No	Not applicable
DROP MATERIALIZED VIEW	No	Not applicable
DROP OPERATOR	Yes	None
DROP OPERATOR CLASS	Yes	None
DROP OPERATOR FAMILY	Yes	None
DROP OWNED	No	Not applicable
DROP POLICY	No	Not applicable
DROP PROCEDURE	Yes	None
DROP PUBLICATION	No	Not applicable
DROP ROLE	Yes	None
DROP ROUTINE	No	Not applicable
DROP RULE	No	Not applicable
DROP SCHEMA	Yes	None
DROP SEQUENCE	Yes	None
DROP SERVER	No	Not applicable
DROP STATISTICS	No	Not applicable
DROP SUBSCRIPTION	No	None
DROP TABLE	Yes	None
DROP TABLESPACE	No	Not applicable

Command	Supported?	Limitations or more information
DROP TEXT SEARCH CONFIGURATION	No	Not applicable
DROP TEXT SEARCH DICTIONARY	No	Not applicable
DROP TEXT SEARCH PARSER	No	Not applicable
DROP TEXT SEARCH TEMPLATE	No	Not applicable
DROP TRANSFORM	No	Not applicable
DROP TRIGGER	No	Not applicable
DROP TYPE	Yes	None
DROP USER	Yes	None
DROP USER MAPPING	No	Not applicable
DROP VIEW	Yes	None
GRANT	Yes	None
REASSIGN OWNED	No	Not applicable
REVOKE	Yes	None
SECURITY LABEL	No	Not applicable
SELECT INTO	Yes	SELECT INTO
SET	Yes	None
SET CONSTRAINTS	No	Not applicable
SET ROLE	Yes	None

Command	Supported?	Limitations or more information
SET SESSION AUTHORIZATION	Yes	None
SET TRANSACTION	Yes	None
TRUNCATE	Yes	None

DDL limitations and other information for Aurora PostgreSQL Limitless Database

The following topics describe limitations or provide more information for DDL SQL commands in Aurora PostgreSQL Limitless Database.

Topics

- ALTER TABLE
- CREATE DATABASE
- CREATE INDEX
- CREATE SCHEMA
- CREATE TABLE
- CREATE TABLE AS
- DROP DATABASE
- SELECT INTO
- Constraints
- Default values
- Extensions
- Foreign keys
- Functions
- Sequences

ALTER TABLE

The `ALTER TABLE` command is generally supported in Aurora PostgreSQL Limitless Database. For more information, see ALTER TABLE in the PostgreSQL documentation.

Limitations

`ALTER TABLE` has the following limitations for supported options.

Removing a column

- On sharded tables, you can't remove columns that are part of the shard key.
- On reference tables, you can't remove primary key columns.

Changing a column's data type

- The `USING` expression isn't supported.
- On sharded tables, you can't change the type for columns that are part of the shard key.

Adding or removing a constraint

For details on what isn't supported, see Constraints.

Changing a column's default value

Default values are supported. For more information, see Default values.

Unsupported options

Some options aren't supported because they depend on unsupported features, such as triggers.

The following table-level options for `ALTER TABLE` aren't supported:

- `ALL IN TABLESPACE`
- `ATTACH PARTITION`
- `DETACH PARTITION`
- `ONLY` flag
- `RENAME CONSTRAINT`

The following column-level options for `ALTER TABLE` aren't supported:

- ADD GENERATED

- DROP EXPRESSION [IF EXISTS]
- DROP IDENTITY [IF EXISTS]
- RESET
- RESTART
- SET
- SET COMPRESSION
- SET STATISTICS

CREATE DATABASE

In Aurora PostgreSQL Limitless Database, only limitless databases are supported.

While `CREATE DATABASE` is running, databases that were successfully created in one or more nodes might fail in other nodes, because database creation is a nontransactional operation. In this case, the database objects that were successfully created are automatically removed from all of the nodes within a predetermined amount of time to keep consistency in the DB shard group. During this time, re-creation of a database with the same name might result in an error indicating that the database already exists.

The following options are supported:

- Collation:

```
CREATE DATABASE name WITH
    [LOCALE = locale]
    [LC_COLLATE = lc_collate]
    [LC_CTYPE = lc_ctype]
    [ICU_LOCALE = icu_locale]
    [ICU_RULES = icu_rules]
    [LOCALE_PROVIDER = locale_provider]
    [COLLATION_VERSION = collation_version];
```

- `CREATE DATABASE WITH OWNER`:

```
CREATE DATABASE name WITH OWNER = user_name;
```

The following options aren't supported:

- `CREATE DATABASE WITH TABLESPACE`:

```
CREATE DATABASE name WITH TABLESPACE = tablespace_name;
```

- `CREATE DATABASE WITH TEMPLATE`:

```
CREATE DATABASE name WITH TEMPLATE = template;
```

CREATE INDEX

`CREATE INDEX CONCURRENTLY` is supported for sharded tables:

```
CREATE INDEX CONCURRENTLY index_name ON table_name(column_name);
```

`CREATE UNIQUE INDEX` is supported for all table types:

```
CREATE UNIQUE INDEX index_name ON table_name(column_name);
```

`CREATE UNIQUE INDEX CONCURRENTLY` isn't supported:

```
CREATE UNIQUE INDEX CONCURRENTLY index_name ON table_name(column_name);
```

For more information, see UNIQUE. For general information on creating indexes, see CREATE INDEX in the PostgreSQL documentation.

Showing indexes

Not all indexes are visible on routers when you use `\d table_name` or similar commands. Instead, use the `pg_catalog.pg_indexes` view to get indexes, as shown in the following example.

```
SET rds_aurora.limitless_create_table_mode='sharded';
SET rds_aurora.limitless_create_table_shard_key='{"id"}';
CREATE TABLE items (id int PRIMARY KEY, val int);
CREATE INDEX items_my_index on items (id, val);

postgres_limitless=> SELECT * FROM pg_catalog.pg_indexes WHERE tablename='items';
```

```
 schemaname | tablename |   indexname    | tablespace |
   indexdef
------------+-----------+----------------+------------
+-------------------------------------------------------------------------
 public     | items     | items_my_index |            | CREATE INDEX items_my_index
 ON ONLY public.items USING btree (id, val)
 public     | items     | items_pkey     |            | CREATE UNIQUE INDEX
 items_pkey ON ONLY public.items USING btree (id)
(2 rows)
```

CREATE SCHEMA

`CREATE SCHEMA` with a schema element isn't supported:

```
CREATE SCHEMA my_schema CREATE TABLE (column_name INT);
```

This generates an error similar to the following:

```
ERROR: CREATE SCHEMA with schema elements is not supported
```

CREATE TABLE

Relations in `CREATE TABLE` statements aren't supported, for example:

```
CREATE TABLE orders (orderid int, customerId int, orderDate date) WITH
 (autovacuum_enabled = false);
```

`IDENTITY` columns aren't supported, for example:

```
CREATE TABLE orders (orderid INT GENERATED ALWAYS AS IDENTITY);
```

Aurora PostgreSQL Limitless Database supports up to 54 characters for sharded table names.

CREATE TABLE AS

To create a table using `CREATE TABLE AS`, you must use the `rds_aurora.limitless_create_table_mode` variable. For sharded tables, you must also use the `rds_aurora.limitless_create_table_shard_key` variable. For more information, see Creating limitless tables by using variables.

```
-- Set the variables.
SET rds_aurora.limitless_create_table_mode='sharded';
SET rds_aurora.limitless_create_table_shard_key='{"a"}';

CREATE TABLE ctas_table AS SELECT 1 a;

-- "source" is the source table whose columns and data types are used to create the new
 "ctas_table2" table.
CREATE TABLE ctas_table2 AS SELECT a,b FROM source;
```

You can't use `CREATE TABLE AS` to create reference tables, because they require primary key constraints. `CREATE TABLE AS` doesn't propagate primary keys to new tables.

For general information, see CREATE TABLE AS in the PostgreSQL documentation.

DROP DATABASE

You can drop databases that you've created.

The `DROP DATABASE` command runs asynchronously in the background. While it's running, you will receive an error if you try to create a new database with the same name.

SELECT INTO

`SELECT INTO` is functionally similar to CREATE TABLE AS. You must use the `rds_aurora.limitless_create_table_mode` variable. For sharded tables, you must also use the `rds_aurora.limitless_create_table_shard_key` variable. For more information, see Creating limitless tables by using variables.

```
-- Set the variables.
SET rds_aurora.limitless_create_table_mode='sharded';
SET rds_aurora.limitless_create_table_shard_key='{"a"}';

-- "source" is the source table whose columns and data types are used to create the new
 "destination" table.
SELECT * INTO destination FROM source;
```

Currently, the `SELECT INTO` operation is performed through the router, not directly through the shards. Therefore, performance can be slow.

For general information, see SELECT INTO in the PostgreSQL documentation.

Constraints

The following limitations apply to constraints in Aurora PostgreSQL Limitless Database.

CHECK

Simple constraints that involve comparison operators with literals are supported. More complex expressions and constraints that require function validations aren't supported, as shown in the following examples.

```
CREATE TABLE my_table (
    id  INT CHECK (id > 0)                                        -- supported
  , val INT CHECK (val > 0 AND val < 1000)                        -- supported
  , tag TEXT CHECK (length(tag) > 0)                              -- not supported:
 throws "Expression inside CHECK constraint is not supported"
  , op_date TIMESTAMP WITH TIME ZONE CHECK (op_date <= now())  -- not supported:
 throws "Expression inside CHECK constraint is not supported"
);
```

You can give constraints explicit names, as shown in the following example.

```
CREATE TABLE my_table (
    id  INT CONSTRAINT positive_id  CHECK (id > 0)
  , val INT CONSTRAINT val_in_range CHECK (val > 0 AND val < 1000)
);
```

You can use table-level constraint syntax with the CHECK constraint, as shown in the following example.

```
CREATE TABLE my_table (
    id INT CONSTRAINT positive_id  CHECK (id > 0)
  , min_val INT CONSTRAINT min_val_in_range CHECK (min_val > 0 AND min_val < 1000)
  , max_val INT
  , CONSTRAINT max_val_in_range CHECK (max_val > 0 AND max_val < 1000 AND max_val >
 min_val)
);
```

EXCLUDE

Exclusion constraints aren't supported in Aurora PostgreSQL Limitless Database.

FOREIGN KEY

For more information, see Foreign keys.

NOT NULL

`NOT NULL` constraints are supported with no restrictions.

PRIMARY KEY

Primary key implies unique constraints and therefore the same restrictions on unique constraints apply on primary key. This means:

- If a table is converted into a sharded table, the shard key must be a subset of the primary key. That is, the primary key contains all columns of the shard key.
- If a table is converted into a reference table, it must have a primary key.

The following examples illustrate the use of primary keys.

```
-- Create a standard table.
CREATE TABLE public.my_table (
    item_id INT
  , location_code INT
  , val INT
  , comment text
);

-- Change the table to a sharded table using the 'item_id' and 'location_code'
 columns as shard keys.
CALL rds_aurora.limitless_alter_table_type_sharded('public.my_table',
 ARRAY['item_id', 'location_code']);
```

Trying to add a primary key that doesn't contain a shard key:

```
-- Add column 'item_id' as the primary key.
-- Invalid because the primary key doesnt include all columns from the shard key:
-- 'location_code' is part of the shard key but not part of the primary key
ALTER TABLE public.my_table ADD PRIMARY KEY (item_id); -- ERROR

-- add column "val" as primary key
-- Invalid because primary key does not include all columns from shard key:
--  item_id and location_code iare part of shard key but not part of the primary key
ALTER TABLE public.my_table ADD PRIMARY KEY (item_id); -- ERROR
```

Trying to add a primary key that does contain a shard key:

```
-- Add the 'item_id' and 'location_code' columns as the primary key.
-- Valid because the primary key contains the shard key.
ALTER TABLE public.my_table ADD PRIMARY KEY (item_id, location_code); -- OK

-- Add the 'item_id', 'location_code', and 'val' columns as the primary key.
-- Valid because the primary key contains the shard key.
ALTER TABLE public.my_table ADD PRIMARY KEY (item_id, location_code, val); -- OK
```

Change a standard table to a reference table.

```
-- Create a standard table.
CREATE TABLE zipcodes (zipcode INT PRIMARY KEY, details VARCHAR);

-- Convert the table to a reference table.
CALL rds_aurora.limitless_alter_table_type_reference('public.zipcode');
```

For more information on creating sharded and reference tables, see Creating Aurora PostgreSQL Limitless Database tables.

UNIQUE

In sharded tables, the unique key must contain the shard key, that is, the shard key must be a subset of the unique key. This is checked when changing the table type to sharded. In reference tables there's no restriction.

```
CREATE TABLE customer (
    customer_id INT NOT NULL
  , zipcode INT
  , email TEXT UNIQUE
);
```

Table-level `UNIQUE` constraints are supported, as shown in the following example.

```
CREATE TABLE customer (
    customer_id INT NOT NULL
  , zipcode INT
  , email TEXT
  , CONSTRAINT zipcode_and_email UNIQUE (zipcode, email)
);
```

The following example shows the use of a primary key and a unique key together. Both keys must include the shard key.

```
SET rds_aurora.limitless_create_table_mode='sharded';
SET rds_aurora.limitless_create_table_shard_key='{"p_id"}';
CREATE TABLE t1 (
p_id BIGINT NOT NULL,
c_id BIGINT NOT NULL,
PRIMARY KEY (p_id),
UNIQUE (p_id, c_id)
);
```

For more information, see Constraints in the PostgreSQL documentation.

Default values

Aurora PostgreSQL Limitless Database supports expressions in default values.

The following example shows the use of default values.

```
CREATE TABLE t (
    a INT DEFAULT 5,
    b TEXT DEFAULT 'NAN',
    c NUMERIC
);

CALL rds_aurora.limitless_alter_table_type_sharded('t', ARRAY['a']);
INSERT INTO t DEFAULT VALUES;
SELECT * FROM t;

 a |  b  | c
---+-----+---
 5 | NAN |
(1 row)
```

Expressions are supported, as shown in the following example.

```
CREATE TABLE t1 (a NUMERIC DEFAULT random());
```

The following example adds a new column that is `NOT NULL` and has a default value.

```
ALTER TABLE t ADD COLUMN d BOOLEAN NOT NULL DEFAULT FALSE;
SELECT * FROM t;

 a |  b  | c | d
---+-----+---+---
 5 | NAN |   | f
(1 row)
```

The following example alters an existing column with a default value.

```
ALTER TABLE t ALTER COLUMN c SET DEFAULT 0.0;
INSERT INTO t DEFAULT VALUES;
SELECT * FROM t;

 a |  b  | c   |  d
---+-----+-----+-----
 5 | NAN |     | f
 5 | NAN | 0.0 | f
(2 rows)
```

The following example drops a default value.

```
ALTER TABLE t ALTER COLUMN a DROP DEFAULT;
INSERT INTO t DEFAULT VALUES;
SELECT * FROM t;

 a |  b  | c   |  d
---+-----+-----+-----
 5 | NAN |     | f
 5 | NAN | 0.0 | f
   | NAN | 0.0 | f
(3 rows)
```

For more information, see Default values in the PostgreSQL documentation.

Extensions

The following PostgreSQL extensions are supported in Aurora PostgreSQL Limitless Database:

- `aurora_limitless_fdw` – This extension is preinstalled. You can't drop it.
- `aws_s3` – This extension works in Aurora PostgreSQL Limitless Database similar to the way it does in Aurora PostgreSQL.

  You can import data from an Amazon S3 bucket to an Aurora PostgreSQL Limitless Database DB cluster, or export data from an Aurora PostgreSQL Limitless Database DB cluster to an Amazon S3 bucket. For more information, see Importing data from Amazon S3 into an Aurora PostgreSQL DB cluster and Exporting data from an Aurora PostgreSQL DB cluster to Amazon S3.
- `btree_gin`
- `citext`
- `ip4r`
- `pg_buffercache` – This extension behaves differently in Aurora PostgreSQL Limitless Database from community PostgreSQL. For more information, see pg_buffercache differences in Aurora PostgreSQL Limitless Database.
- `pg_stat_statements`
- `pg_trgm`
- `pgcrypto`
- `pgstattuple` – This extension behaves differently in Aurora PostgreSQL Limitless Database from community PostgreSQL. For more information, see pgstattuple differences in Aurora PostgreSQL Limitless Database.
- `pgvector`
- `plpgsql` – This extension is preinstalled, but you can drop it.
- `PostGIS` – Long transactions and table management functions aren't supported. Modifying the spatial reference table isn't supported.
- `unaccent`
- `uuid`

Most PostgreSQL extensions currently aren't supported in Aurora PostgreSQL Limitless Database. However, you can still use the shared_preload_libraries (SPL) configuration setting to load

extensions into the Aurora PostgreSQL primary DB cluster. They are also loaded into Aurora PostgreSQL Limitless Database, but might not function correctly.

For example, you can load the `pg_hint_plan` extension, but loading it doesn't guarantee that the hints passed in query comments are used.

> **Note**
>
> You can't modify objects associated with the pg_stat_statements extension. For information on installing `pg_stat_statements`, see limitless_stat_statements.

You can use the `pg_available_extensions` and `pg_available_extension_versions` functions to find the extensions that are supported in Aurora PostgreSQL Limitless Database.

The following DDLs are supported for extensions:

CREATE EXTENSION

You can create extensions, as in PostgreSQL.

```
CREATE EXTENSION [ IF NOT EXISTS ] extension_name
    [ WITH ] [ SCHEMA schema_name ]
             [ VERSION version ]
             [ CASCADE ]
```

For more information, see CREATE EXTENSION in the PostgreSQL documentation.

ALTER EXTENSION

The following DDLs are supported:

```
ALTER EXTENSION name UPDATE [ TO new_version ]

ALTER EXTENSION name SET SCHEMA new_schema
```

For more information, see ALTER EXTENSION in the PostgreSQL documentation.

DROP EXTENSION

You can drop extensions, as in PostgreSQL.

```
DROP EXTENSION [ IF EXISTS ] name [, ...] [ CASCADE | RESTRICT ]
```

For more information, see DROP EXTENSION in the PostgreSQL documentation.

The following DDLs aren't supported for extensions:

ALTER EXTENSION

You can't add or drop member objects from extensions.

```
ALTER EXTENSION name ADD member_object

ALTER EXTENSION name DROP member_object
```

pg_buffercache differences in Aurora PostgreSQL Limitless Database

In Aurora PostgreSQL Limitless Database, when you install the pg_buffercache extension and use the `pg_buffercache` view, you receive buffer-related information only from the node to which you're currently connected: the router. Similarly, using the function `pg_buffercache_summary` or `pg_buffercache_usage_counts` provides information only from the connected node.

You can have numerous nodes and might need to access buffer information from any node to diagnose issues effectively. Therefore, Limitless Database provides the following functions:

- `rds_aurora.limitless_pg_buffercache(subcluster_id)`
- `rds_aurora.limitless_pg_buffercache_summary(subcluster_id)`
- `rds_aurora.limitless_pg_buffercache_usage_counts(subcluster_id)`

By inputting the subcluster ID of any node, whether it's a router or shard, you can easily access the buffer information specific to that node. These functions are directly available when you install the `pg_buffercache` extension in the limitless database.

> **Note**
>
> Aurora PostgreSQL Limitless Database supports these functions for version 1.4 and higher of the `pg_buffercache` extension.

The columns shown in the limitless_pg_buffercache view differ slightly from those in the pg_buffercache view:

- bufferid – Remains unchanged from pg_buffercache.
- relname – Instead of displaying the file node number as in pg_buffercache, limitless_pg_buffercache presents the associated relname if available in the current database or shared system catalogs, otherwise NULL.
- parent_relname – This new column, not present in pg_buffercache, displays the parent relname if the value in the relname column represents a partitioned table (in the case of sharded tables). Otherwise, it displays NULL.
- spcname – Instead of displaying the tablespace object identifier (OID) as in pg_buffercache, limitless_pg_buffercache displays the tablespace name.
- datname – Instead of displaying the database OID as in pg_buffercache, limitless_pg_buffercache displays the database name.
- relforknumber – Remains unchanged from pg_buffercache.
- relblocknumber – Remains unchanged from pg_buffercache.
- isdirty – Remains unchanged from pg_buffercache.
- usagecount – Remains unchanged from pg_buffercache.
- pinning_backends – Remains unchanged from pg_buffercache.

The columns in limitless_pg_buffercache_summary and limitless_pg_buffercache_usage_counts views are the same as those in the regular pg_buffercache_summary and pg_buffercache_usage_counts views, respectively.

By using these functions, you can access detailed buffer cache information across all nodes in your Limitless Database environment, facilitating more effective diagnosis and management of your database systems.

pgstattuple differences in Aurora PostgreSQL Limitless Database

In Aurora PostgreSQL, the pgstattuple extension currently doesn't support foreign tables, partitioned tables, or partitioned indexes. However, in Aurora PostgreSQL Limitless Database, user-created objects are often among these unsupported types. While there are regular tables and indexes (for example, catalog tables and their indexes), most objects reside on foreign nodes, making them foreign objects for the router.

We recognize the importance of this extension for obtaining tuple-level statistics, which is crucial for tasks such as removing bloat and gathering diagnostic information. Therefore, Aurora PostgreSQL Limitless Database provides support for the `pgstattuple` extension in limitless databases.

Aurora PostgreSQL Limitless Database includes the following functions in the `rds_aurora` schema:

Tuple-level statistics functions

`rds_aurora.limitless_pgstattuple(`*`relation_name`*`)`

- Purpose: Extract tuple-level statistics for standard tables and their indexes
- Input: `relation_name` (text) – The name of the relation
- Output: Columns consistent with those returned by the `pgstattuple` function in Aurora PostgreSQL

`rds_aurora.limitless_pgstattuple(`*`relation_name`*`, `*`subcluster_id`*`)`

- Purpose: Extract tuple-level statistics for reference tables, sharded tables, catalog tables, and their indexes
- Input:
  - `relation_name` (text) – The name of the relation
  - `subcluster_id` (text) – The subcluster ID of the node where the statistics are to be extracted
- Output:
  - For reference and catalog tables (including their indexes), columns are consistent with those in Aurora PostgreSQL.
  - For sharded tables, the statistics represent only the partition of the sharded table residing on the specified subcluster.

Index statistics functions

`rds_aurora.limitless_pgstatindex(`*`relation_name`*`)`

- Purpose: Extract statistics for B-tree indexes on standard tables
- Input: `relation_name` (text) – The name of the B-tree index
- Output: All columns except `root_block_no` are returned. The returned columns are consistent with the `pgstatindex` function in Aurora PostgreSQL.

`rds_aurora.limitless_pgstatindex(relation_name, subcluster_id)`

- Purpose: Extract statistics for B-tree indexes on reference tables, sharded tables, and catalog tables.
- Input:
  - `relation_name` (text) – The name of the B-tree index
  - `subcluster_id` (text) – The subcluster ID of the node where the statistics are to be extracted
- Output:
  - For reference and catalog table indexes, all columns (except `root_block_no`) are returned. The returned columns are consistent with Aurora PostgreSQL.
  - For sharded tables, the statistics represent only the partition of the sharded table index residing on the specified subcluster. The `tree_level` column shows the average across all table slices on the requested subcluster.

`rds_aurora.limitless_pgstatginindex(relation_name)`

- Purpose: Extract statistics for Generalized Inverted Indexes (GINs) on standard tables
- Input: `relation_name` (text) – The name of the GIN
- Output: Columns consistent with those returned by the `pgstatginindex` function in Aurora PostgreSQL

`rds_aurora.limitless_pgstatginindex(relation_name, subcluster_id)`

- Purpose: Extract statistics for GIN indexes on reference tables, sharded tables, and catalog tables.
- Input:
  - `relation_name` (text) – The name of the index
  - `subcluster_id` (text) – The subcluster ID of the node where the statistics are to be extracted
- Output:
  - For reference and catalog table GIN indexes, columns are consistent with those in Aurora PostgreSQL.
  - For sharded tables, the statistics represent only the partition of the sharded table index residing on the specified subcluster.

`rds_aurora.limitless_pgstathashindex(relation_name)`

- Purpose: Extract statistics for hash indexes on standard tables
- Input: `relation_name` (text) – The name of the hash index
- Output: Columns consistent with those returned by the `pgstathashindex` function in Aurora PostgreSQL

`rds_aurora.limitless_pgstathashindex(`*`relation_name`*`, `*`subcluster_id`*`)`

- Purpose: Extract statistics for hash indexes on reference tables, sharded tables, and catalog tables.
- Input:
  - `relation_name` (text) – The name of the index
  - `subcluster_id` (text) – The subcluster ID of the node where the statistics are to be extracted
- Output:
  - For reference and catalog table hash indexes, columns are consistent with Aurora PostgreSQL.
  - For sharded tables, the statistics represent only the partition of the sharded table index residing on the specified subcluster.

Page count functions

`rds_aurora.limitless_pg_relpages(`*`relation_name`*`)`

- Purpose: Extract the page count for standard tables and their indexes
- Input: `relation_name` (text) – The name of the relation
- Output: Page count of the specified relation

`rds_aurora.limitless_pg_relpages(`*`relation_name`*`, `*`subcluster_id`*`)`

- Purpose: Extract the page count for reference tables, sharded tables, and catalog tables (including their indexes)
- Input:
  - `relation_name` (text) – The name of the relation
  - `subcluster_id` (text) – The subcluster ID of the node where the page count is to be extracted
- Output: For sharded tables, the page count is the sum of pages across all table slices on the specified subcluster.

Approximate tuple-level statistics functions

`rds_aurora.limitless_pgstattuple_approx(relation_name)`

- Purpose: Extract approximate tuple-level statistics for standard tables and their indexes
- Input: `relation_name` (text) – The name of the relation
- Output: Columns consistent with those returned by the pgstattuple_approx function in Aurora PostgreSQL

`rds_aurora.limitless_pgstattuple_approx(relation_name, subcluster_id)`

- Purpose: Extract approximate tuple-level statistics for reference tables, sharded tables, and catalog tables (including their indexes)
- Input:
  - `relation_name` (text) – The name of the relation
  - `subcluster_id` (text) – The subcluster ID of the node where the statistics are to be extracted
- Output:
  - For reference and catalog tables (including their indexes), columns are consistent with those in Aurora PostgreSQL.
  - For sharded tables, the statistics represent only the partition of the sharded table residing on the specified subcluster.

> **Note**
>
> Currently, Aurora PostgreSQL Limitless Database doesn't support the `pgstattuple` extension on materialized views, TOAST tables, or temporary tables.
> In Aurora PostgreSQL Limitless Database, you must provide the input as text, although Aurora PostgreSQL supports other formats.

Foreign keys

Foreign key (`FOREIGN KEY`) constraints are supported with some limitations:

- `CREATE TABLE` with `FOREIGN KEY` is supported only for standard tables. To create a sharded or reference table with `FOREIGN KEY`, first create the table without a foreign key constraint. Then modify it using the following statement:

  ```
  ALTER TABLE ADD CONSTRAINT;
  ```

- Converting a standard table to a sharded or reference table isn't supported when the table has a foreign key constraint. Drop the constraint, then add it after conversion.
- The following limitations apply to table types for foreign key constraints:
  - A standard table can have a foreign key constraint to another standard table.
  - A sharded table can have a foreign key constraint if the parent and child tables are collocated and the foreign key is a superset of the shard key.
  - A sharded table can have a foreign key constraint to a reference table.
  - A reference table can have a foreign key constraint to another reference table.

Topics

- Foreign key options
- Examples

Foreign key options

Foreign keys are supported in Aurora PostgreSQL Limitless Database for some DDL options. The following table lists options that are supported and not supported between Aurora PostgreSQL Limitless Database tables.

DDL option	Reference to reference	Sharded to sharded (collocated)	Sharded to reference	Standard to standard
DEFERRABLE	Yes	Yes	Yes	Yes

DDL option	Reference to reference	Sharded to sharded (collocated)	Sharded to reference	Standard to standard
INITIALLY DEFERRED	Yes	Yes	Yes	Yes
INITIALLY IMMEDIATE	Yes	Yes	Yes	Yes
MATCH FULL	Yes	Yes	Yes	Yes
MATCH PARTIAL	No	No	No	No
MATCH SIMPLE	Yes	Yes	Yes	Yes
NOT DEFERRABLE	Yes	Yes	Yes	Yes
NOT VALID	Yes	No	No	Yes
ON DELETE CASCADE	Yes	Yes	Yes	Yes
ON DELETE NO ACTION	Yes	Yes	Yes	Yes
ON DELETE RESTRICT	Yes	Yes	Yes	Yes
ON DELETE SET DEFAULT	No	No	No	No
ON DELETE SET NULL	Yes	No	No	Yes
ON UPDATE CASCADE	No	No	No	Yes

DDL option	Reference to reference	Sharded to sharded (collocated)	Sharded to reference	Standard to standard
ON UPDATE NO ACTION	Yes	Yes	Yes	Yes
ON UPDATE RESTRICT	Yes	Yes	Yes	Yes
ON UPDATE SET DEFAULT	No	No	No	No
ON UPDATE SET NULL	Yes	No	No	Yes

Examples

- Standard to standard:

```
set rds_aurora.limitless_create_table_mode='standard';

CREATE TABLE products(
    product_no integer PRIMARY KEY,
    name text,
    price numeric
);

CREATE TABLE orders (
    order_id integer PRIMARY KEY,
    product_no integer REFERENCES products (product_no),
    quantity integer
);

SELECT constraint_name, table_name, constraint_type
FROM information_schema.table_constraints WHERE constraint_type='FOREIGN KEY';

 constraint_name         | table_name  | constraint_type
-------------------------+-------------+-----------------
 orders_product_no_fkey  | orders      | FOREIGN KEY
```

```
(1 row)
```

- Sharded to sharded (collocated):

```
set rds_aurora.limitless_create_table_mode='sharded';
set rds_aurora.limitless_create_table_shard_key='{"product_no"}';
CREATE TABLE products(
    product_no integer PRIMARY KEY,
    name text,
    price numeric
);

set rds_aurora.limitless_create_table_shard_key='{"order_id"}';
set rds_aurora.limitless_create_table_collocate_with='products';
CREATE TABLE orders (
    order_id integer PRIMARY KEY,
    product_no integer,
    quantity integer
);

ALTER TABLE orders ADD CONSTRAINT order_product_fk FOREIGN KEY (product_no)
 REFERENCES products (product_no);
```

- Sharded to reference:

```
set rds_aurora.limitless_create_table_mode='reference';
CREATE TABLE products(
    product_no integer PRIMARY KEY,
    name text,
    price numeric
);

set rds_aurora.limitless_create_table_mode='sharded';
set rds_aurora.limitless_create_table_shard_key='{"order_id"}';
CREATE TABLE orders (
    order_id integer PRIMARY KEY,
    product_no integer,
    quantity integer
);

ALTER TABLE orders ADD CONSTRAINT order_product_fk FOREIGN KEY (product_no)
 REFERENCES products (product_no);
```

- Reference to reference:

```
set rds_aurora.limitless_create_table_mode='reference';
CREATE TABLE products(
    product_no integer PRIMARY KEY,
    name text,
    price numeric
);
CREATE TABLE orders (
    order_id integer PRIMARY KEY,
    product_no integer,
    quantity integer
);

ALTER TABLE orders ADD CONSTRAINT order_product_fk FOREIGN KEY (product_no)
 REFERENCES products (product_no);
```

Functions

Functions are supported in Aurora PostgreSQL Limitless Database.

The following DDLs are supported for functions:

CREATE FUNCTION

You can create functions, as in Aurora PostgreSQL, with the exception of changing their volatility while replacing them.

For more information, see CREATE FUNCTION in the PostgreSQL documentation.

ALTER FUNCTION

You can alter functions, as in Aurora PostgreSQL, with the exception of changing their volatility.

For more information, see ALTER FUNCTION in the PostgreSQL documentation.

DROP FUNCTION

You can drop functions, as in Aurora PostgreSQL.

```
DROP FUNCTION [ IF EXISTS ] name [ ( [ [ argmode ] [ argname ] argtype [, ...] ] ) ]
 [, ...]
    [ CASCADE | RESTRICT ]
```

For more information, see DROP FUNCTION in the PostgreSQL documentation.

Topics

- Function distribution
- Function volatility

Function distribution

When all of the statements of a function are targeted to a single shard, it's beneficial to push the entire function down to the target shard. Then the result is propagated back to the router, rather than unraveling the function at the router itself. Function and stored procedure pushdown capability is useful for customers who want to run their function or stored procedure closer to the data source, that is the shard.

To distribute a function, first create the function, then call the `rds_aurora.limitless_distribute_function` procedure to distribute it. This function uses the following syntax:

```
SELECT rds_aurora.limitless_distribute_function('function_prototype',
 ARRAY['shard_key'], 'collocating_table');
```

The function takes the following parameters:

- *`function_prototype`* – The function to be distributed. Mention only the input arguments, and not any of the output arguments.

  If any of the arguments are defined as OUT parameters, don't include their type in the arguments of `function_prototype`.
- `ARRAY['`*`shard_key`*`']` – The list of function arguments that are identified as the shard key for the function.
- *`collocating_table`* – The sharded table that contains the range of data on the target shard.

To identify the shard where to push down this function for running, the system takes the `ARRAY['`*`shard_key`*`']` argument, hashes it, and finds the shard from *`collocating_table`* that hosts the range containing this hash value.

Restrictions

When you distribute a function or procedure, it only deals with data that's bounded by the shard key range in that shard. In cases where the function or procedure tries to access data from a different shard, the results returned by the distributed function or procedure will be different compared to one that isn't distributed.

For example, you create a function containing queries that will touch multiple shards, but then call the `rds_aurora.limitless_distribute_function` procedure to distribute it. When you invoke this function by providing arguments for a shard key, it is likely that the results of running it will be bounded by the values present in that shard. These results are different from ones produced without distributing the function.

Examples

Consider the following function `func` where we have the sharded table `customers` with the shard key `customer_id`.

```
postgres_limitless=> CREATE OR REPLACE FUNCTION func(c_id integer, sc integer)
 RETURNS int
    language SQL
    volatile
    AS $$
    UPDATE customers SET score = sc WHERE customer_id = c_id RETURNING score;
    $$;
```

Now we distribute this function:

```
SELECT rds_aurora.limitless_distribute_function('func(integer, integer)',
 ARRAY['c_id'], 'customers');
```

The following are example query plans.

```
EXPLAIN(costs false, verbose true) SELECT func(27+1,10);

                    QUERY PLAN
 ---------------------------------------------------
  Foreign Scan
    Output: (func((27 + 1), 10))
    Remote SQL:  SELECT func((27 + 1), 10) AS func
  Single Shard Optimized
 (4 rows)
```

```
EXPLAIN(costs false, verbose true)
 SELECT * FROM customers,func(customer_id, score) WHERE customer_id=10 AND score=27;

                          QUERY PLAN
 ------------------------------------------------------------------------
  Foreign Scan
    Output: customer_id, name, score, func
    Remote SQL:  SELECT customers.customer_id,
      customers.name,
      customers.score,
      func.func
     FROM public.customers,
      LATERAL func(customers.customer_id, customers.score) func(func)
    WHERE ((customers.customer_id = 10) AND (customers.score = 27))
  Single Shard Optimized
 (10 rows)
```

The following example shows a procedure with IN and OUT parameters as arguments.

```
CREATE OR REPLACE FUNCTION get_data(OUT id INTEGER, IN arg_id INT)
    AS $$
    BEGIN
        SELECT customer_id,
        INTO id
        FROM customer
        WHERE customer_id = arg_id;
    END;
    $$ LANGUAGE plpgsql;
```

The following example distributes the procedure using only IN parameters.

```
EXPLAIN(costs false, verbose true) SELECT * FROM get_data(1);

             QUERY PLAN
 ---------------------------------
  Foreign Scan
    Output: id
    Remote SQL:  SELECT customer_id
     FROM get_data(1) get_data(id)
  Single Shard Optimized
 (6 rows)
```

Function volatility

You can determine whether a function is immutable, stable, or volatile by checking the provolatile value in the pg_proc view. The provolatile value indicates whether the function's result depends only on its input arguments, or is affected by outside factors.

The value is one of the following:

- i – Immutable functions, which always deliver the same result for the same inputs
- s – Stable functions, whose results (for fixed inputs) don't change within a scan
- v – Volatile functions, whose results might change at any time. Also use v for functions with side effects, so that calls to them can't be optimized away.

The following examples show volatile functions.

```
SELECT proname, provolatile FROM pg_proc WHERE proname='pg_sleep';

 proname  | provolatile
----------+-------------
 pg_sleep | v
(1 row)

SELECT proname, provolatile FROM pg_proc WHERE proname='uuid_generate_v4';

     proname      | provolatile
------------------+-------------
 uuid_generate_v4 | v
(1 row)

SELECT proname, provolatile FROM pg_proc WHERE proname='nextval';

 proname | provolatile
---------+-------------
 nextval | v
(1 row)
```

Changing the volatility of an existing function isn't supported in Aurora PostgreSQL Limitless Database. This applies to both `ALTER FUNCTION` and `CREATE OR REPLACE FUNCTION` commands, as shown in the following examples.

```
-- Create an immutable function
CREATE FUNCTION immutable_func1(name text) RETURNS text language plpgsql
AS $$
BEGIN
    RETURN name;
END;
$$IMMUTABLE;

-- Altering the volatility throws an error
ALTER FUNCTION immutable_func1 STABLE;

-- Replacing the function with altered volatility throws an error
CREATE OR REPLACE FUNCTION immutable_func1(name text) RETURNS text language plpgsql
AS $$
BEGIN
    RETURN name;
END;
```

```
$$VOLATILE;
```

We highly recommend that you assign the correct volatilities to functions. For example, if your function uses `SELECT` from multiple tables or references database objects, don't set it as `IMMUTABLE`. If the table contents ever change, the immutability is broken.

Aurora PostgreSQL allows `SELECT` inside immutable functions, but the results might be incorrect. Aurora PostgreSQL Limitless Database can return both errors and incorrect results. For more information on function volatility, see Function volatility categories in the PostgreSQL documentation.

Sequences

Named sequences are database objects that generate unique numbers in ascending or descending order. `CREATE SEQUENCE` creates a new sequence number generator. Sequence values are guaranteed to be unique.

When you create a named sequence in Aurora PostgreSQL Limitless Database, a distributed sequence object is created. Then Aurora PostgreSQL Limitless Database distributes non-overlapping chunks of sequence values across all Distributed Transaction Routers (routers). Chunks are represented as local sequence objects on routers; therefore, sequence operations such as `nextval` and `currval` are run locally. Routers operate independently, and request new chunks from the distributed sequence when needed.

For more information on sequences, see CREATE SEQUENCE in the PostgreSQL documentation.

Topics

- Requesting a new chunk
- Limitations
- Unsupported options
- Examples
- Sequence views
- Troubleshooting sequence issues

Requesting a new chunk

You configure the sizes of chunks allocated on routers by using the `rds_aurora.limitless_sequence_chunk_size` parameter. The default value is `250000`. Each router initially owns two chunks: active and reserved. Active chunks are used to configure local sequence objects (setting `minvalue` and `maxvalue`), and reserved chunks are stored in an internal catalog table. When an active chunk reaches the minimum or maximum value, it's replaced by the reserved chunk. To do that, `ALTER SEQUENCE` is used internally, meaning that `AccessExclusiveLock` is acquired.

Background workers run every 10 seconds on router nodes to scan sequences for used reserved chunks. If a used chunk is found, the worker requests a new chunk from the distributed sequence. Make sure to set the chunk size large enough that the background workers have enough time to

request new ones. Remote requests never happen in the context of user sessions, which means that you can't request a new sequence directly.

Limitations

The following limitations apply to sequences in Aurora PostgreSQL Limitless Database:

- The `pg_sequence` catalog, `pg_sequences` function, and `SELECT * FROM` *`sequence_name`* statement all show only the local sequence state, not the distributed state.
- Sequence values are guaranteed to be unique, and are guaranteed to be monotonic within a session. But they can be out of order with `nextval` statements run in other sessions, if those sessions are connected to other routers.
- Make sure that the sequence size (number of available values) is large enough to be distributed across all routers. Use the `rds_aurora.limitless_sequence_chunk_size` parameter to configure the `chunk_size`. (Each router has two chunks.)
- The `CACHE` option is supported, but the cache must be smaller than `chunk_size`.

Unsupported options

The following options aren't supported for sequences in Aurora PostgreSQL Limitless Database.

Sequence manipulation functions

The `setval` function isn't supported. For more information, see Sequence Manipulation Functions in the PostgreSQL documentation.

CREATE SEQUENCE

The following options aren't supported.

```
CREATE [{ TEMPORARY | TEMP} | UNLOGGED] SEQUENCE
    [[ NO ] CYCLE]
```

For more information, see CREATE SEQUENCE in the PostgreSQL documentation.

ALTER SEQUENCE

The following options aren't supported.

```
ALTER SEQUENCE
```

```
    [[ NO ] CYCLE]
```

For more information, see ALTER SEQUENCE in the PostgreSQL documentation.

ALTER TABLE

The `ALTER TABLE` command isn't supported for sequences.

Examples

CREATE/DROP SEQUENCE

```
postgres_limitless=> CREATE SEQUENCE s;
CREATE SEQUENCE

postgres_limitless=> SELECT nextval('s');

 nextval
---------
       1
(1 row)

postgres_limitless=> SELECT * FROM pg_sequence WHERE seqrelid='s'::regclass;

 seqrelid | seqtypid | seqstart | seqincrement | seqmax | seqmin | seqcache |
 seqcycle
----------+----------+----------+--------------+--------+--------+----------
+----------
    16960 |       20 |        1 |            1 |  10000 |      1 |        1 | f
(1 row)

% connect to another router
postgres_limitless=> SELECT nextval('s');

 nextval
---------
   10001
(1 row)

postgres_limitless=> SELECT * FROM pg_sequence WHERE seqrelid='s'::regclass;

 seqrelid | seqtypid | seqstart | seqincrement | seqmax | seqmin | seqcache |
 seqcycle
```

```
----------+----------+----------+--------------+--------+--------+----------
+----------
    16959 |       20 |    10001 |            1 |  20000 |  10001 |        1 | f
(1 row)

postgres_limitless=> DROP SEQUENCE s;
DROP SEQUENCE
```

ALTER SEQUENCE

```
postgres_limitless=> CREATE SEQUENCE s;
CREATE SEQUENCE

postgres_limitless=> ALTER SEQUENCE s RESTART 500;
ALTER SEQUENCE

postgres_limitless=> SELECT nextval('s');

 nextval
---------
     500
(1 row)

postgres_limitless=> SELECT currval('s');

 currval
---------
     500
(1 row)
```

Sequence manipulation functions

```
postgres=# CREATE TABLE t(a bigint primary key, b bigint);
CREATE TABLE

postgres=# CREATE SEQUENCE s minvalue 0 START 0;
CREATE SEQUENCE

postgres=# INSERT INTO t VALUES (nextval('s'), currval('s'));

INSERT 0 1

postgres=# INSERT INTO t VALUES (nextval('s'), currval('s'));
```

```
INSERT 0 1

postgres=# SELECT * FROM t;

 a | b
---+---
 0 | 0
 1 | 1
(2 rows)

postgres=# ALTER SEQUENCE s RESTART 10000;
ALTER SEQUENCE

postgres=# INSERT INTO t VALUES (nextval('s'), currval('s'));

INSERT 0 1

postgres=# SELECT * FROM t;

   a   |   b
-------+-------
     0 |     0
     1 |     1
 10000 | 10000
(3 rows)
```

Sequence views

Aurora PostgreSQL Limitless Database provides the following views for sequences.

rds_aurora.limitless_distributed_sequence

This view shows a distributed sequence state and configuration. The `minvalue`, `maxvalue`, `start`, `inc`, and `cache` columns have the same meaning as in the pg_sequences view, and show the options with which the sequence was created. The `lastval` column shows the latest allocated or reserved value in a distributed sequence object. This doesn't mean that the value was already used, as routers keep sequence chunks locally.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_distributed_sequence WHERE
 sequence_name='test_serial_b_seq';

 schema_name |   sequence_name   | lastval | minvalue |  maxvalue  | start | inc |
 cache
-------------+-------------------+---------+----------+------------+-------+-----
+-------
 public      | test_serial_b_seq | 1250000 |        1 | 2147483647 |     1 |   1 |
   1
(1 row)
```

rds_aurora.limitless_sequence_metadata

This view shows distributed sequence metadata and aggregates sequence metadata from cluster nodes. It uses the following columns:

- `subcluster_id` – The cluster node ID that owns a chunk.
- Active chunk – A chunk of a sequence that is being used (`active_minvalue`, `active_maxvalue`).
- Reserved chunk – The local chunk that will be used next (`reserved_minvalue`, `reserved_maxvalue`).
- `local_last_value` – The last observed value from a local sequence.
- `chunk_size` – The size of a chunk, as configured on creation.

```
postgres_limitless=> SELECT * FROM rds_aurora.limitless_sequence_metadata WHERE
 sequence_name='test_serial_b_seq' order by subcluster_id;
```

```
 subcluster_id |   sequence_name   | schema_name | active_minvalue | active_maxvalue
 | reserved_minvalue | reserved_maxvalue | chunk_size | chunk_state |
 local_last_value
---------------+-------------------+-------------+-----------------
+-----------------+-------------------+-------------------+------------
+-------------+------------------
 1             | test_serial_b_seq | public      |          500001 |          750000
 |           1000001 |           1250000 |     250000 |           1 |
 550010
 2             | test_serial_b_seq | public      |          250001 |          500000
 |            750001 |           1000000 |     250000 |           1 |

(2 rows)
```

Troubleshooting sequence issues

The following issues can occur with sequences.

Chunk size not large enough

If the chunk size isn't set large enough and the transaction rate is high, the background workers might not have enough time to request new chunks before the active chunks are exhausted. This can lead to contention and wait events such as `LIMITLESS:AuroraLimitlessSequenceReplace`, `LWLock:LockManager` , `Lockrelation`, and `LWlock:bufferscontent`.

Increase the value of the `rds_aurora.limitless_sequence_chunk_size` parameter.

Sequence cache set too high

In PostgreSQL, sequence caching happens at the session level. Each session allocates successive sequence values during one access to the sequence object, and increases the sequence object's `last_value` accordingly. Then, the next uses of `nextval` within that session simply return the pre-allocated values without touching the sequence object.

Any numbers allocated but not used within a session are lost when that session ends, resulting in "holes" in the sequence. This can consume the sequence_chunk quickly and lead to to contention and wait events such as `LIMITLESS:AuroraLimitlessSequenceReplace`, `LWLock:LockManager` , `Lockrelation`, and `LWlock:bufferscontent`.

Reduce the sequence cache setting.

The following figure shows wait events caused by sequence issues.



Supported and unsupported Data Manipulation Language (DML) and query processing SQL commands

The following table lists the DML commands that are supported and not supported by Aurora PostgreSQL Limitless Database, with references to limitations or more information.

Command	Supported?	Limitations or more information
ABORT	Yes	None
ANALYZE	Yes	ANALYZE
BEGIN	Yes	None
CALL	Yes	None
CHECKPOINT	Yes	None
CLOSE	Yes	None
CLUSTER	Yes	CLUSTER
COMMIT	Yes	None
COMMIT PREPARED	No	Not applicable
COPY	Yes	None
DEALLOCATE	Yes	None
DECLARE	Yes	None
DELETE	Yes	None
DISCARD	Yes	None
DO	Yes	None
END	Yes	None

Command	Supported?	Limitations or more information
EXECUTE	Yes	None
EXPLAIN	Yes	EXPLAIN
FETCH	Yes	None
IMPORT FOREIGN SCHEMA	No	Not applicable
INSERT	Yes	INSERT
LISTEN	No	Not applicable
LOCK	Yes	None
MERGE	No	Not applicable
MOVE	Yes	None
NOTIFY	No	Not applicable
OPEN	Yes	None
PREPARE	Yes	None
PREPARE TRANSACTION	No	Not applicable
REFRESH MATERIALIZED VIEW	No	Not applicable
REINDEX	No	Not applicable
RELEASE SAVEPOINT	Yes	None
ROLLBACK	Yes	None
ROLLBACK PREPARED	No	Not applicable
ROLLBACK TO SAVEPOINT	Yes	None

Command	Supported?	Limitations or more information
SAVEPOINT	Yes	None
SELECT	Yes	None
SELECT INTO	Yes	None
SHOW	Yes	None
START TRANSACTION	Yes	None
UNLISTEN	No	None
UPDATE	Yes	UPDATE
UPDATE … WHERE CURRENT OF	No	Not applicable
VACUUM	Yes	VACUUM
VALUES	Yes	None

DML limitations and other information for Aurora PostgreSQL Limitless Database

The following topics describe limitations or provide more information for DML and query processing SQL commands in Aurora PostgreSQL Limitless Database.

Topics

- ANALYZE
- CLUSTER
- EXPLAIN
- INSERT
- UPDATE
- VACUUM

ANALYZE

The ANALYZE command collects statistics about the contents of tables in the database. Subsequently, the query planner uses these statistics to help determine the most efficient execution plans for queries. For more information, see ANALYZE in the PostgreSQL documentation.

In Aurora PostgreSQL Limitless Database, the ANALYZE command collects table statistics across all routers and shards when it runs.

To prevent the calculation of statistics on every router during ANALYZE runs, table statistics are calculated on one of the routers and then copied to peer routers.

CLUSTER

The CLUSTER command physically reorders a table based on an index. The index must already have been defined on the table. In Aurora PostgreSQL Limitless Database, the clustering is local to the part of the index that's present on each shard.

For more information, see CLUSTER in the PostgreSQL documentation.

EXPLAIN

You use the following parameter to configure the output from the EXPLAIN command:

- `rds_aurora.limitless_explain_options` – What to include in the EXPLAIN output. The default value is `single_shard_optimization`: whether plans are single-shard optimized is shown, but shard plans aren't included.

In this example, the EXPLAIN output doesn't show plans from shards.

```
postgres_limitless=> EXPLAIN SELECT * FROM employees where id =25;

                      QUERY PLAN
------------------------------------------------------
 Foreign Scan  (cost=100.00..101.00 rows=100 width=0)
 Single Shard Optimized
(2 rows)
```

Now we set the `rds_aurora.limitless_explain_options` to include `shard_plans` and `single_shard_optimization`. We can view the execution plans of statements on both routers and shards. In addition, we disable the `enable_seqscan` parameter to enforce that index scan is used on the shard layer.

```
postgres_limitless=> SET rds_aurora.limitless_explain_options = shard_plans,
 single_shard_optimization;
SET

postgres_limitless=> SET enable_seqscan = OFF;
SET

postgres_limitless=> EXPLAIN SELECT * FROM employees WHERE id = 25;

                                                    QUERY PLAN
------------------------------------------------------------------------------------------------------------
 Foreign Scan  (cost=100.00..101.00 rows=100 width=0)
   Remote Plans from Shard postgres_s4:
         Index Scan using employees_ts00287_id_idx on employees_ts00287
 employees_fs00003  (cost=0.14..8.16 rows=1 width=15)
           Index Cond: (id = 25)
 Single Shard Optimized
(5 rows)
```

For more information on the EXPLAIN command, see EXPLAIN in the PostgreSQL documentation.

INSERT

Most INSERT commands are supported in Aurora PostgreSQL Limitless Database.

PostgreSQL doesn't have an explicit UPSERT command, but it does support INSERT ... ON CONFLICT statements.

INSERT ... ON CONFLICT isn't supported if the conflict action has a subquery or a mutable function:

```
-- RANDOM is a mutable function.
INSERT INTO sharded_table VALUES (1, 100) ON CONFLICT (id) DO UPDATE SET other_id =
 RANDOM();

ERROR: Aurora Limitless Tables doesn't support pushdown-unsafe functions with DO UPDATE
 clauses.
```

For more information on the INSERT command, see INSERT in the PostgreSQL documentation.

UPDATE

Updating the shard key isn't supported. For example, you have a sharded table called customers, with a shard key customer_id. The following DML statements cause errors:

```
postgres_limitless=> UPDATE customers SET customer_id = 11 WHERE customer_id =1;
ERROR:  Shard key column update is not supported

postgres_limitless=> UPDATE customers SET customer_id = 11 WHERE customer_name='abc';
ERROR:  Shard key column update is not supported
```

To update a shard key, first you have to DELETE the row with the shard key, then INSERT a new row with the updated shard key value.

For more information on the UPDATE command, see Updating data in the PostgreSQL documentation.

VACUUM

You can perform vacuuming on both sharded and reference tables. The following VACUUM functions are fully supported in Aurora PostgreSQL Limitless Database:

- VACUUM
- ANALYZE
- DISABLE_PAGE_SKIPPING
- FREEZE
- FULL
- INDEX_CLEANUP
- PARALLEL
- PROCESS_TOAST
- TRUNCATE
- VERBOSE

VACUUM on Aurora PostgreSQL Limitless Database has the following limitations:

- The pg_visibility_map extension isn't supported.
- Checking for unused indexes with the pg_stat_all_indexes view isn't supported.
- Consolidated views for pg_stat_user_indexes, pg_class, and pg_stats aren't implemented.

For more information on the VACUUM command, see VACUUM in the PostgreSQL documentation. For more information on how vacuuming works in Aurora PostgreSQL Limitless Database, see Reclaiming storage space by vacuuming.

Variables in Aurora PostgreSQL Limitless Database

You can use the following variables to configure Aurora PostgreSQL Limitless Database.

rds_aurora.limitless_active_shard_key

Sets a single shard key while querying the database, causing all SELECT and DML queries to be appended with the shard key as a constant predicate. For more information, see Setting an active shard key.

rds_aurora.limitless_create_table_collocate_with

Set this variable to a specific table name to collocate newly created tables with that table. For more information, see Creating limitless tables by using variables.

rds_aurora.limitless_create_table_mode

Sets the table creation mode. For more information, see Creating limitless tables by using variables.

rds_aurora.limitless_create_table_shard_key

Set this variable to an array of column names to use as shard keys. For more information, see Creating limitless tables by using variables.

rds_aurora.limitless_explain_options

What to include in the EXPLAIN output. For more information, see EXPLAIN.

DB cluster parameters in Aurora PostgreSQL Limitless Database

You can use the following DB cluster parameters to configure Aurora PostgreSQL Limitless Database.

rds_aurora.limitless_adaptive_fetch_size

Enhances batch prefetching. When set to `true`, this parameter allows a self-adjusting (adaptive) fetch size for prefetching. When set to `false`, the fetch size is constant.

rds_aurora.limitless_auto_scale_options

Sets the options available for adding routers or splitting shards in a DB shard group. The value can be `add_router`, `split_shard`, or both.

For more information, see Adding a router to a DB shard group and Splitting a shard in a DB shard group.

rds_aurora.limitless_distributed_deadlock_timeout

The amount of time to wait on a lock before checking whether there is a distributed deadlock condition, in milliseconds. The default is `1000` (1 second).

For more information, see Distributed deadlocks in Aurora PostgreSQL Limitless Database.

rds_aurora.limitless_enable_auto_scale

Enables the adding of routers and splitting of shards in a DB shard group.

For more information, see Adding a router to a DB shard group and Splitting a shard in a DB shard group.

rds_aurora.limitless_finalize_split_shard_mode

Determines how system-initiated shard splits are finalized. For more information, see Splitting a shard in a DB shard group.

rds_aurora.limitless_maximum_adaptive_fetch_size

Sets the upper limit for the adaptive fetch size. The range is `1–INT_MAX`. The default is `1000`.

Using Amazon Aurora Global Database

With the Amazon Aurora Global Database feature, you set up multiple Aurora DB clusters that span multiple Amazon Web Services Regions. Aurora automatically synchronizes all changes made in the primary DB cluster to one or more secondary clusters. An Aurora global database has a primary DB cluster in one Region, and up to 10 secondary DB clusters in different Regions. This multi-Region configuration provides fast recovery from the rare outage that might affect an entire Amazon Web Services Region. Having a full copy of all your data in multiple geographic locations also enables low-latency read operations for applications that connect from widely separated locations around the world.

Topics

- Overview of Amazon Aurora Global Database
- Advantages of Amazon Aurora Global Database
- Region and version availability
- Limitations of Amazon Aurora Global Database
- Getting started with Amazon Aurora Global Database
- Managing an Amazon Aurora global database
- Connecting to Amazon Aurora Global Database
- Using write forwarding in an Amazon Aurora global database
- Using switchover or failover in Amazon Aurora Global Database
- Monitoring an Amazon Aurora global database
- Using Blue/Green Deployments for Amazon Aurora Global Database
- Using Amazon Aurora global databases with other Amazon services
- Upgrading an Amazon Aurora global database


Overview of Amazon Aurora Global Database

By using the Amazon Aurora Global Database feature, you can run your globally distributed applications using a single Aurora database that spans multiple Amazon Web Services Regions.

An Aurora global database consists of one *primary* Amazon Web Services Region where your data is written, and up to 10 read-only *secondary* Amazon Web Services Regions. You issue write

operations to the primary DB cluster in the primary Amazon Web Services Region. The most convenient way to do so is to connect to the Aurora Global Database writer endpoint, which always points to the primary DB cluster, even after a switchover or failover to a different Amazon Web Services Region. After any write operation, Aurora replicates data to the secondary Amazon Web Services Regions using dedicated infrastructure, with latency typically under a second.

In the following diagram, you can find an example Aurora global database that spans two Amazon Web Services Regions.

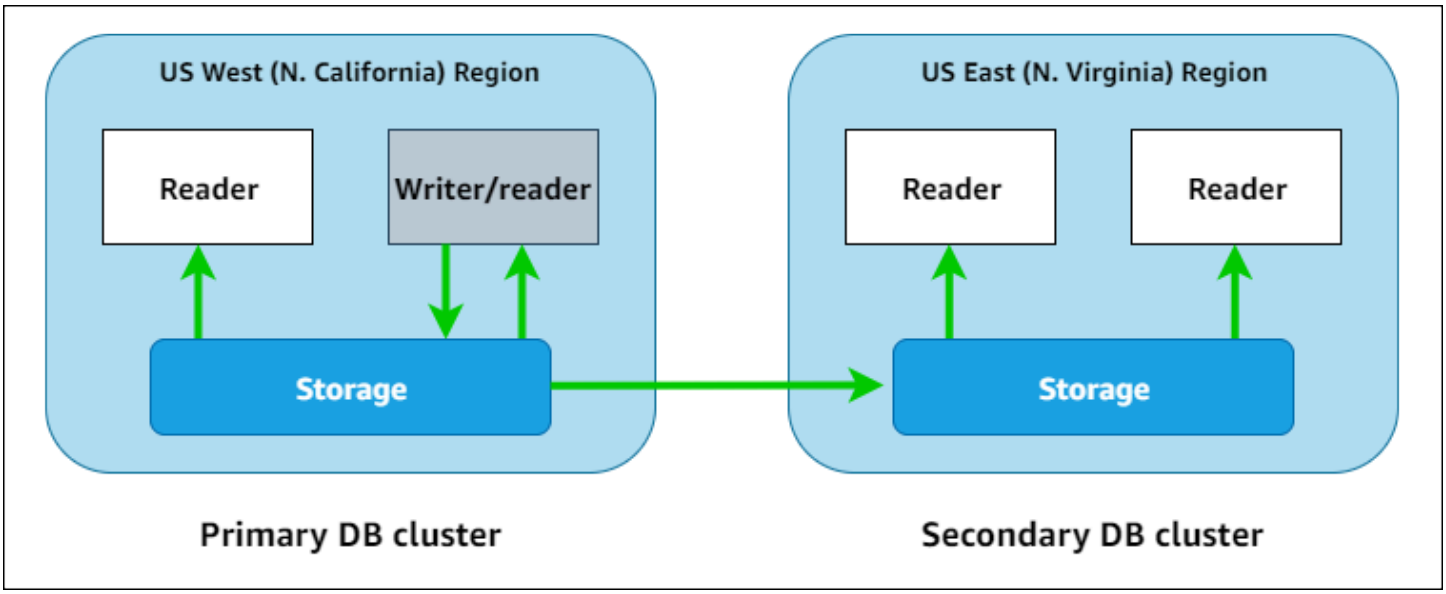

You can scale up each secondary cluster independently, by adding one or more Aurora reader instances to serve read-only workloads. You can use Aurora serverless for the reader instances for even more granular and flexible scaling.

Only the primary cluster performs write operations. Clients that perform write operations connect to the Aurora Global Database writer endpoint, which always points to the writer DB instance of the primary cluster. As shown in the diagram, Aurora uses the cluster storage volume and not the database engine for fast, low-overhead replication. To learn more, see Overview of Amazon Aurora storage.

Aurora Global Database is designed for applications with a worldwide footprint. The read-only secondary DB clusters in multiple Amazon Web Services Regions help to optimize read operations closer to application users. By using the write forwarding feature, you can also configure your global database so that secondary clusters send write requests to the primary. For more information, see Using write forwarding in an Amazon Aurora global database.

Aurora Global Database supports two different operations for changing the Region of your primary DB cluster, depending on the scenario: *Aurora Global Database switchover* and *Aurora Global Database failover*.

- For planned operational procedures such as Regional rotation, use the switchover mechanism (previously called "managed planned failover"). With this feature, you can relocate the primary cluster of a healthy Aurora Global Database to one of its secondary Regions with no data loss. To learn more, see Performing switchovers for Amazon Aurora global databases.
- To recover your Aurora Global Database after an outage in the primary Region, use the failover mechanism. With this feature, you perform a failover from your primary DB cluster to another Region (cross-Region failover). To learn more, see Performing managed failovers for Aurora global databases.

Advantages of Amazon Aurora Global Database

By using Aurora Global Database, you can get the following advantages:

- **Global reads with local latency** – If you have offices around the world, you can use Aurora Global Database to keep your main sources of information updated in the primary Amazon Web Services Region. Offices in your other Regions can access the information in their own Region, with local latency.
- **Scalable secondary Aurora DB clusters** – You can scale your secondary clusters by adding more read-only instances to a secondary Amazon Web Services Region. The secondary cluster is read-only, so it can support up to 16 read-only DB instances rather than the usual limit of 15 for a single Aurora cluster.
- **Fast replication from primary to secondary Aurora DB clusters** – The replication performed by Aurora Global Database has little performance impact on the primary DB cluster. The resources of the DB instances are fully devoted to serve application read and write workloads.
- **Recovery from Region-wide outages** – The secondary clusters allow you to make an Aurora Global Database available in a new primary Amazon Web Services Region more quickly (lower RTO) and with less data loss (lower RPO) than traditional replication solutions.

Region and version availability

Feature availability and support vary across specific versions of each Aurora database engine, and across Amazon Web Services Regions. For more information on version and Region availability with Aurora Global Database, see Supported Regions and DB engines for Aurora global databases.

Limitations of Amazon Aurora Global Database

The following limitations currently apply to Aurora Global Database:

- Aurora Global Database is available in certain Amazon Web Services Regions and for specific Aurora MySQL and Aurora PostgreSQL versions. For more information, see Supported Regions and DB engines for Aurora global databases.
- Aurora Global Database has specific configuration requirements for supported Aurora DB instance classes, maximum number of Amazon Web Services Regions, and so on. For more information, see Configuration requirements of an Amazon Aurora global database.
- For Aurora MySQL with MySQL 5.7 compatibility, Aurora Global Database switchovers require version 2.09.1 or a higher minor version.
- You can perform managed cross-Region switchovers or failovers with Aurora Global Database only if the primary and secondary DB clusters have the same major and minor engine versions. Depending on the engine and engine versions, the patch levels might need to be identical or the patch levels can be different. For a list of engines and engine versions that allow these operations between primary and secondary clusters with different patch levels, see Patch level compatibility for managed cross-Region switchovers and failovers. If your engine versions require identical patch levels, you can perform the failover manually by following the steps in Performing manual failovers for Aurora global databases.
- Aurora Global Database currently doesn't support the following Aurora features:
  - Backtracking in Aurora
- For limitations with using the RDS Proxy feature with Aurora Global Database, see Limitations for RDS Proxy with global databases.
- Automatic minor version upgrade doesn't apply to Aurora MySQL and Aurora PostgreSQL clusters that are part of a global database. Note that you can specify this setting for a DB instance that is part of a global database cluster, but the setting has no effect.
- Aurora Global Database currently doesn't support Aurora Auto Scaling for secondary DB clusters.

- To use Database Activity Streams (DAS) on Aurora Global Database running Aurora MySQL 5.7, the engine version must be version 2.08 or higher. For information about DAS, see Monitoring Amazon Aurora with Database Activity Streams.
- The following limitations currently apply to upgrading Aurora Global Database:
  - You can't apply a custom parameter group to the global database cluster while you're performing a major version upgrade of that Aurora global database. You create your custom parameter groups in each Region of the global cluster and you apply them manually to the Regional clusters after the upgrade.
  - With an Aurora global database based on Aurora MySQL, you can't perform an in-place upgrade from Aurora MySQL version 2 to version 3 if the `lower_case_table_names` parameter is turned on. For more information on the methods that you can use, see Major version upgrades.
  - With Aurora Global Database, you can't perform a major version upgrade of the Aurora PostgreSQL DB engine if the recovery point objective (RPO) feature is turned on. For information about the RPO feature, see Managing RPOs for Aurora PostgreSQL–based global databases.
  - With an Aurora Global Database, you can't perform a minor version upgrade from Aurora MySQL version 3.01 or 3.02 to 3.03 or higher by using the standard process. For details about the process to use, see Upgrading Aurora MySQL by modifying the engine version.

  For information about upgrading Aurora Global Database, see Upgrading an Amazon Aurora global database.
- You can't stop or start the Aurora DB clusters in your global database individually. To learn more, see Stopping and starting an Amazon Aurora DB cluster.
- Aurora reader DB instances attached to the secondary Aurora DB cluster can restart under certain circumstances. If the primary Amazon Web Services Region's writer DB instance undergoes a restart or failover, reader DB instances in secondary Regions also restart. The secondary cluster is then unavailable until all reader DB instances are back in sync with the primary DB cluster's writer instance. The behavior of the primary cluster when rebooting or during a failover is the same as for a singular, nonglobal DB cluster. For more information, see Replication with Amazon Aurora.

  Be sure that you understand the impacts to your global database before making changes to your primary DB cluster. To learn more, see Recovering an Amazon Aurora global database from an unplanned outage.

- Aurora Global Database currently doesn't support the `inaccessible-encryption-credentials-recoverable` status when Amazon Aurora loses access to the Amazon KMS key for the DB cluster. In these cases, the encrypted DB cluster goes directly into the terminal `inaccessible-encryption-credentials` state. For more information about these states, see Viewing DB cluster status.
- Secrets Manager doesn't support Aurora Global Database. When you add a Region to a global database, you must first turn off Secrets Manager integration for the DB instance.
- You can't rename a Regional Aurora DB cluster while it is a member of an Aurora global database. However, you can change the global cluster identifier and the identifiers of individual DB instances within a member cluster.
- Aurora PostgreSQL–based DB clusters that use Aurora Global Database have the following limitations:
  - Cluster cache management isn't supported for Aurora PostgreSQL secondary DB clusters that are part of Aurora global databases.
  - If the primary DB cluster of your global database is based on a replica of an Amazon RDS PostgreSQL instance, you can't create a secondary cluster. Don't attempt to create a secondary from that cluster using the Amazon Web Services Management Console, the Amazon CLI, or the `CreateDBCluster` API operation. Attempts to do so time out, and the secondary cluster isn't created.

We recommend that you create secondary DB clusters for your global databases by using the same version of the Aurora DB engine as the primary. For more information, see Creating an Amazon Aurora global database.

Getting started with Amazon Aurora Global Database

To get started with Aurora Global Database, first decide which Aurora DB engine you want to use and in which Amazon Web Services Regions. Only specific versions of the Aurora MySQL and Aurora PostgreSQL database engines in certain Amazon Web Services Regions support Aurora Global Database. For the complete list, see Supported Regions and DB engines for Aurora global databases.

You can create an Aurora Global Database in one of the following ways:

- **Create a new Aurora Global Database with new Aurora DB clusters and Aurora DB instances** – You can do this by following the steps in Creating an Amazon Aurora global database. After you

create the primary Aurora DB cluster, you then add the secondary Amazon Web Services Region by following the steps in Adding an Amazon Web Services Region to an Amazon Aurora global database.

- **Use an existing Aurora DB cluster that supports the Aurora Global Database feature and add an Amazon Web Services Region to it** – You can do this only if your existing Aurora DB cluster uses a DB engine version that is global-compatible.

  Check whether you can choose **Add region** for **Action** on the Amazon Web Services Management Console when your Aurora DB cluster is selected. If you can, you can use that Aurora DB cluster for your Aurora global cluster. For more information, see Adding an Amazon Web Services Region to an Amazon Aurora global database.

Before creating an Aurora Global Database, we recommend that you understand all configuration requirements.

Topics

- Configuration requirements of an Amazon Aurora global database
- Creating an Amazon Aurora global database
- Adding an Amazon Web Services Region to an Amazon Aurora global database
- Creating a headless Aurora DB cluster in a secondary Region
- Creating an Amazon Aurora global database from an Aurora or Amazon RDS snapshot

Configuration requirements of an Amazon Aurora global database

Before you start working with your global database, plan the cluster and instance names, Amazon Regions, number of instances and instance classes that you intend to use. Make sure that your choices agree with the following configuration requirements.

An Aurora global database spans at least two Amazon Web Services Regions. The primary Amazon Web Services Region supports an Aurora DB cluster that has one writer Aurora DB instance. A secondary Amazon Web Services Region runs a read-only Aurora DB cluster made up entirely of Aurora Replicas. At least one secondary Amazon Web Services Region is required, but an Aurora global database can have up to 10 secondary Amazon Web Services Regions. The table lists the maximum Aurora DB clusters, Aurora DB instances, and Aurora Replicas allowed in an Aurora global database.

Description	Primary Amazon Web Services Region	Secondary Amazon Web Services Regions
Aurora DB clusters	1	10 (maximum)
Writer instances	1	0
Read-only instances (Aurora replicas), per Aurora DB cluster	15 (max)	16 (total)
Read-only instances (max allowed, given actual number of secondary Regions)	15 - *s*	*s* = total number of secondary Amazon Web Services Regions

The Aurora DB clusters that make up an Aurora global database have the following specific requirements:

- **DB instance class requirements** – An Aurora global database requires DB instance classes that are optimized for memory-intensive applications. For information about the memory optimized DB instance classes, see DB instance class types. We recommend that you use a db.r5 or higher instance class.
- **Amazon Web Services Region requirements** – An Aurora global database needs a primary Aurora DB cluster in one Amazon Web Services Region, and at least one secondary Aurora DB cluster in a different Region. You can create up to 10 secondary (read-only) Aurora DB clusters, and each must be in a different Region. In other words, no two Aurora DB clusters in an Aurora global database can be in the same Amazon Web Services Region.

  For information about which combinations of Aurora DB engine, engine version, and Amazon Web Services Region you can use with Aurora Global Database, see Supported Regions and DB engines for Aurora global databases.
- **Naming requirements** – The names you choose for each of your Aurora DB clusters must be unique, across all Amazon Web Services Regions. You can't use the same name for different Aurora DB clusters even though they're in different Regions.
- **Capacity requirements for Aurora serverless** – For a global database with Aurora serverless, the minimum recommended capacity for the DB cluster in the primary Amazon Web Services Region is 8 ACUs.

Before you can follow the procedures in this section, you need an Amazon Web Services account. Complete the setup tasks for working with Amazon Aurora. For more information, see Setting up your environment for Amazon Aurora. You also need to complete other preliminary steps for creating any Aurora DB cluster. To learn more, see Creating an Amazon Aurora DB cluster.

When you are ready to set up your global database, see Creating an Amazon Aurora global database for the procedure to create all the necessary resources. You can also follow the procedure in Adding an Amazon Web Services Region to an Amazon Aurora global database to create a global database using an existing Aurora cluster as the primary cluster.

Creating an Amazon Aurora global database

To create an Aurora global database and its associated resources by using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API, use the following steps.

> **Note**
>
> If you have an existing Aurora DB cluster running an Aurora database engine that's global-compatible, you can use a shorter form of this procedure. In that case, you can add another Amazon Web Services Region to the existing DB cluster to create your Aurora global database. To do so, see Adding an Amazon Web Services Region to an Amazon Aurora global database.

Console

The steps for creating an Aurora global database begin by signing in to an Amazon Web Services Region that supports the Aurora global database feature. For a complete list, see Supported Regions and DB engines for Aurora global databases.

One of the following steps is choosing a virtual private cloud (VPC) based on Amazon VPC for your Aurora DB cluster. To use your own VPC, we recommend that you create it in advance so it's available for you to choose. At the same time, create any related subnets, and as needed a subnet group and security group. To learn how, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only).

For general information about creating an Aurora DB cluster, see Creating an Amazon Aurora DB cluster.

To create an Aurora global database

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Create database**. On the **Create database** page, do the following:
   - For the database creation method, choose **Standard create**. (Don't choose Easy create.)
   - For `Engine type` in the **Engine options** section, choose the applicable engine type, **Aurora (MySQL Compatible)** or **Aurora (PostgreSQL Compatible)**.
3. Continue creating your Aurora global database by using the steps from the following procedures.


Creating a global database using Aurora MySQL

The following steps apply to all versions of Aurora MySQL.


To create an Aurora global database using Aurora MySQL

Complete the **Create database** page.

1. For **Engine options**, choose the following:
   - For **Engine version**, choose the version of Aurora MySQL that you want to use for your Aurora global database.
2. For **Templates**, choose **Production**. Or you can choose Dev/Test if appropriate for your use case. Don't use Dev/Test in production environments.
3. For **Settings**, do the following:
   a. Enter a meaningful name for the DB cluster identifier. When you finish creating the Aurora global database, this name identifies the primary DB cluster.
   b. Enter your own password for the `admin` user account for the DB instance, or have Aurora generate one for you. If you choose to autogenerate a password, you get an option to copy the password.

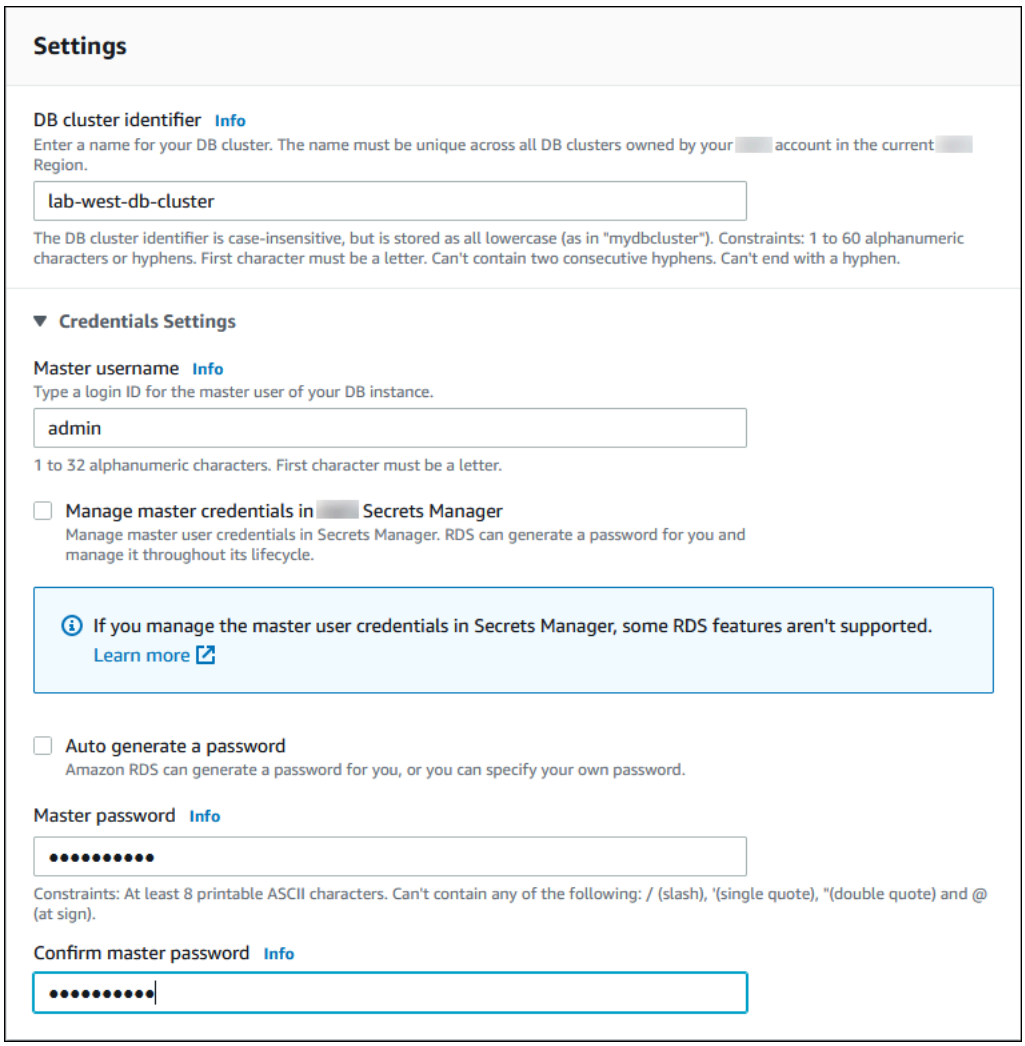

4. For **DB instance class**, choose `db.r5.large` or another memory optimized DB instance class. We recommend that you use a db.r5 or higher instance class.
5. For **Availability & durability**, we recommend that you choose to have Aurora create an Aurora Replica in a different Availability Zone (AZ) for you. If you don't create an Aurora Replica now, you need to do it later.

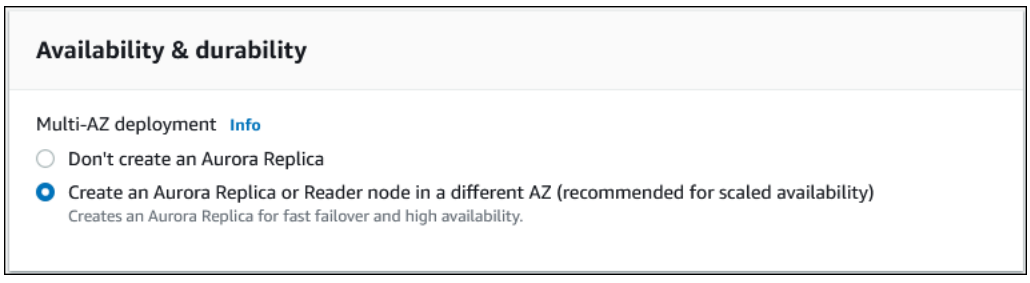

6. For **Connectivity**, choose the virtual private cloud (VPC) based on Amazon VPC that defines the virtual networking environment for this DB instance. You can choose the defaults to simplify this task.


7. Complete the **Database authentication** settings. To simplify the process, you can choose **Password authentication** now and set up Amazon Identity and Access Management (IAM) later.
8. For **Additional configuration**, do the following:

   a. Enter a name for **Initial database name** to create the primary Aurora DB instance for this cluster. This is the writer node for the Aurora primary DB cluster.

   Leave the defaults selected for the DB cluster parameter group and DB parameter group, unless you have your own custom parameter groups that you want to use.

   b. Clear the **Enable backtrack** check box if it's selected. Aurora global databases don't support backtracking. Otherwise, accept the other default settings for **Additional configuration**.
9. Choose **Create database**.

   It can take several minutes for Aurora to complete the process of creating the Aurora DB instance, its Aurora Replica, and the Aurora DB cluster. You can tell when the Aurora DB cluster is ready to use as the primary DB cluster in an Aurora global database by its status. When that's so, its status and that of the writer and replica node is **Available**, as shown following.

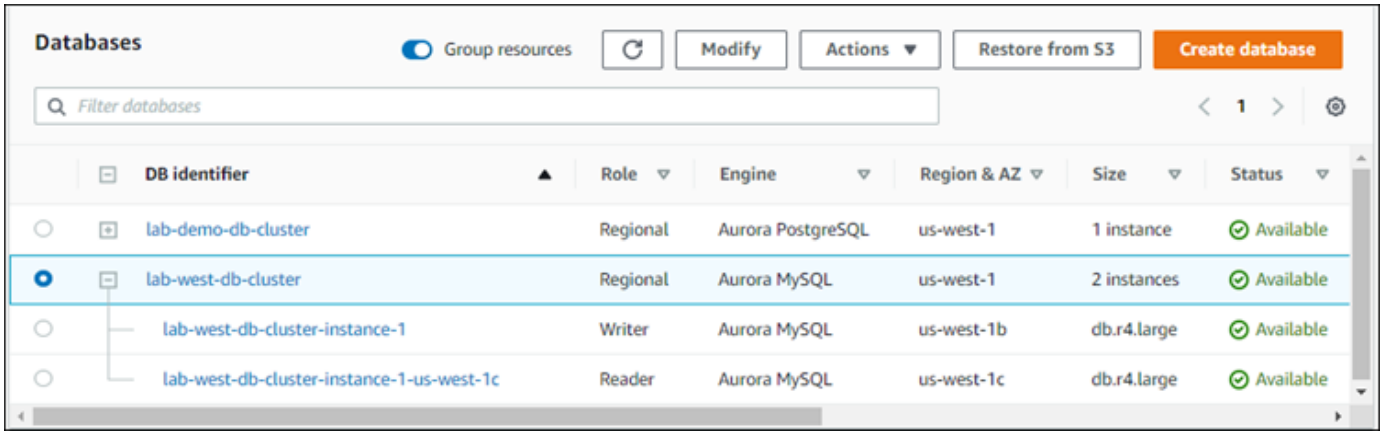


When your primary DB cluster is available, create the Aurora global database by adding a secondary cluster to it. To do this, follow the steps in Adding an Amazon Web Services Region to an Amazon Aurora global database.

Creating a global database using Aurora PostgreSQL

To create an Aurora global database using Aurora PostgreSQL

Complete the **Create database** page.

1. For **Engine options**, choose the following:
   - For **Engine version**, choose the version of Aurora PostgreSQL that you want to use for your Aurora global database.
2. For **Templates**, choose **Production**. Or you can choose Dev/Test if appropriate. Don't use Dev/Test in production environments.
3. For **Settings**, do the following:
   a. Enter a meaningful name for the DB cluster identifier. When you finish creating the Aurora global database, this name identifies the primary DB cluster.
   b. Enter your own password for the default admin account for the DB cluster, or have Aurora generate one for you. If you choose Auto generate a password, you get an option to copy the password.

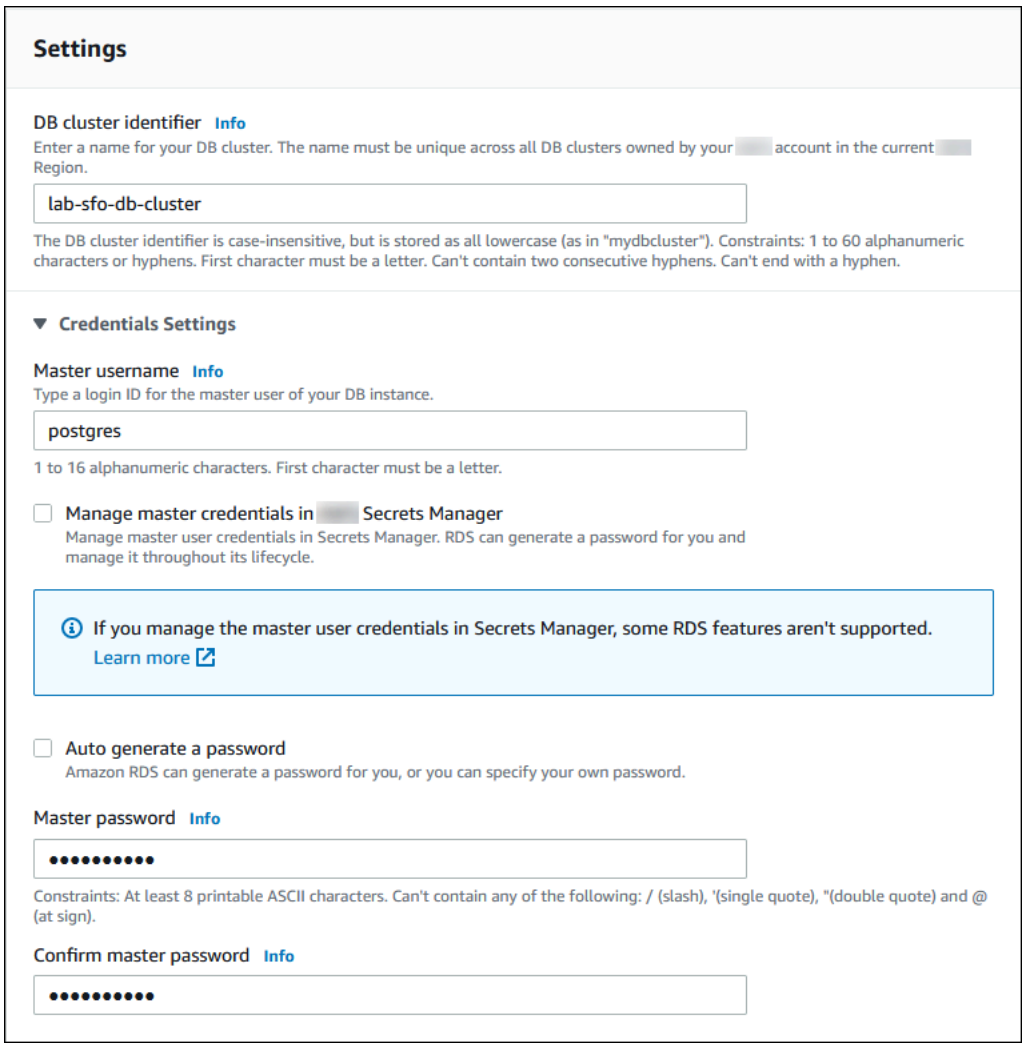

4. For **DB instance class**, choose `db.r5.large` or another memory optimized DB instance class. We recommend that you use a db.r5 or higher instance class.
5. For **Availability & durability**, we recommend that you choose to have Aurora create an Aurora Replica in a different AZ for you. If you don't create an Aurora Replica now, you need to do it later.
6. For **Connectivity**, choose the virtual private cloud (VPC) based on Amazon VPC that defines the virtual networking environment for this DB instance. You can choose the defaults to simplify this task.
7. (Optional) Complete the **Database authentication** settings. Password authentication is always enabled. To simplify the process, you can skip this section and set up IAM or password and Kerberos authentication later.
8. For **Additional configuration**, do the following:


a. Enter a name for **Initial database name** to create the primary Aurora DB instance for this cluster. This is the writer node for the Aurora primary DB cluster.

   Leave the defaults selected for the DB cluster parameter group and DB parameter group, unless you have your own custom parameter groups that you want to use.

b. Accept all other default settings for **Additional configuration**, such as Encryption, Log exports, and so on.

9. Choose **Create database**.

   It can take several minutes for Aurora to complete the process of creating the Aurora DB instance, its Aurora Replica, and the Aurora DB cluster. When the cluster is ready to use, the Aurora DB cluster and its writer and replica nodes display **Available** status. This becomes the primary DB cluster of your Aurora global database, after you add a secondary.

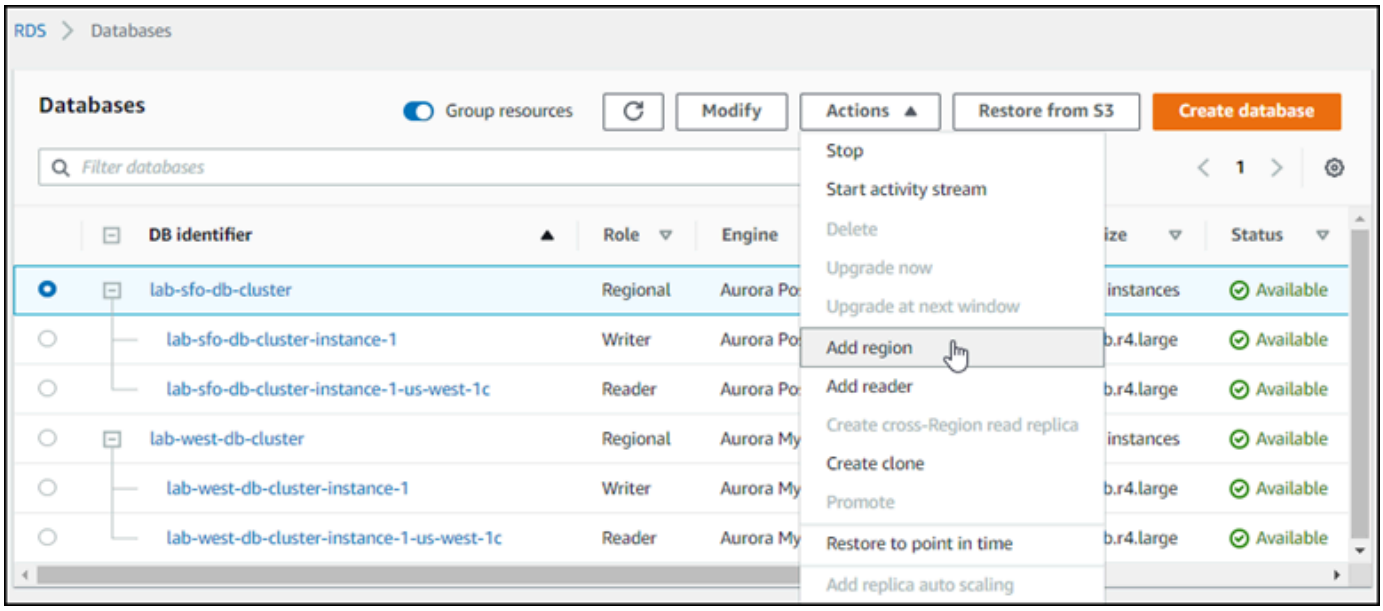

When your primary DB cluster is available, create one or more secondary clusters by following the steps in [Adding an Amazon Web Services Region to an Amazon Aurora global database].

Amazon CLI

The Amazon CLI commands in the procedures following accomplish the following tasks:

1. Create an Aurora global database, giving it a name and specifying the Aurora database engine type that you plan to use.
2. Create an Aurora DB cluster for the Aurora global database.

3. Create the Aurora DB instance for the cluster. This is the primary Aurora DB cluster for the global database.
4. Create a second DB instance for Aurora DB cluster. This is a reader to complete the Aurora DB cluster.
5. Create a second Aurora DB cluster in another Region and then add it to your Aurora global database, by following the steps in Adding an Amazon Web Services Region to an Amazon Aurora global database.

Follow the procedure for your Aurora database engine.

Creating a global database using Aurora MySQL

To create an Aurora global database using Aurora MySQL

1. Use the `create-global-cluster` CLI command, passing the name of the Amazon Web Services Region, Aurora database engine, and version.

   For Linux, macOS, or Unix:

   ```
   aws rds create-global-cluster --region primary_region \
       --global-cluster-identifier global_database_id \
       --engine aurora-mysql \
       --engine-version version # optional
   ```

   For Windows:

   ```
   aws rds create-global-cluster ^
       --global-cluster-identifier global_database_id ^
       --engine aurora-mysql ^
       --engine-version version # optional
   ```

   This creates an "empty" Aurora global database, with just a name (identifier) and Aurora database engine. It can take a few minutes for the Aurora global database to be available. Before going to the next step, use the `describe-global-clusters` CLI command to see if it's available.

   ```
   aws rds describe-global-clusters --region primary_region --global-cluster-
   identifier global_database_id
   ```

When the Aurora global database is available, you can create its primary Aurora DB cluster.

2. To create a primary Aurora DB cluster, use the `create-db-cluster` CLI command. Include the name of your Aurora global database by using the `--global-cluster-identifier` parameter.

   For Linux, macOS, or Unix:

   ```
   aws rds create-db-cluster \
     --region primary_region \
     --db-cluster-identifier primary_db_cluster_id \
     --master-username userid \
     --master-user-password password \
     --engine aurora-mysql \
     --engine-version version \
     --global-cluster-identifier global_database_id
   ```

   For Windows:

   ```
   aws rds create-db-cluster ^
     --region primary_region ^
     --db-cluster-identifier primary_db_cluster_id ^
     --master-username userid ^
     --master-user-password password ^
     --engine aurora-mysql ^
     --engine-version version ^
     --global-cluster-identifier global_database_id
   ```

   Use the `describe-db-clusters` Amazon CLI command to confirm that the Aurora DB cluster is ready. To single out a specific Aurora DB cluster, use `--db-cluster-identifier` parameter. Or you can leave out the Aurora DB cluster name in the command to get details about all your Aurora DB clusters in the given Region.

   ```
   aws rds describe-db-clusters --region primary_region --db-cluster-
   identifier primary_db_cluster_id
   ```

   When the response shows `"Status": "available"` for the cluster, it's ready to use.

3. Create the DB instance for your primary Aurora DB cluster. To do so, use the `create-db-instance` CLI command. Give the command your Aurora DB cluster's name, and specify the

configuration details for the instance. You don't need to pass the `--master-username` and `--master-user-password` parameters in the command, because it gets those from the Aurora DB cluster.

For the `--db-instance-class`, you can use only those from the memory optimized classes, such as `db.r5.large`. We recommend that you use a db.r5 or higher instance class. For information about these classes, see DB instance class types.

For Linux, macOS, or Unix:

```
aws rds create-db-instance \
  --db-cluster-identifier primary_db_cluster_id \
  --db-instance-class instance_class \
  --db-instance-identifier db_instance_id \
  --engine aurora-mysql \
  --engine-version version \
  --region primary_region
```

For Windows:

```
aws rds create-db-instance ^
  --db-cluster-identifier primary_db_cluster_id ^
  --db-instance-class instance_class ^
  --db-instance-identifier db_instance_id ^
  --engine aurora-mysql ^
  --engine-version version ^
  --region primary_region
```

The `create-db-instance` operation might take some time to complete. Check the status to see if the Aurora DB instance is available before continuing.

```
aws rds describe-db-clusters --db-cluster-identifier primary_db_cluster_id
```

When the command returns a status of `available`, you can create another Aurora DB instance for your primary DB cluster. This is the reader instance (the Aurora Replica) for the Aurora DB cluster.

4. To create another Aurora DB instance for the cluster, use the `create-db-instance` CLI command.

For Linux, macOS, or Unix:

```
aws rds create-db-instance \
  --db-cluster-identifier primary_db_cluster_id \
  --db-instance-class instance_class \
  --db-instance-identifier replica_db_instance_id \
  --engine aurora-mysql
```

For Windows:

```
aws rds create-db-instance ^
  --db-cluster-identifier primary_db_cluster_id ^
  --db-instance-class instance_class ^
  --db-instance-identifier replica_db_instance_id ^
  --engine aurora-mysql
```

When the DB instance is available, replication begins from the writer node to the replica. Before continuing, check that the DB instance is available with the `describe-db-instances` CLI command.

At this point, you have an Aurora global database with its primary Aurora DB cluster containing a writer DB instance and an Aurora Replica. You can now add a read-only Aurora DB cluster in a different Region to complete your Aurora global database. To do so, follow the steps in Adding an Amazon Web Services Region to an Amazon Aurora global database.

Creating a global database using Aurora PostgreSQL

When you create Aurora objects for an Aurora global database by using the following commands, it can take a few minutes for each to become available. We recommend that after completing any given command, you check the specific Aurora object's status to make sure that the status is available.

To do so, use the `describe-global-clusters` CLI command.

```
aws rds describe-global-clusters --region primary_region
    --global-cluster-identifier global_database_id
```

To create an Aurora global database using Aurora PostgreSQL

1. Use the `create-global-cluster` CLI command.

   For Linux, macOS, or Unix:

```
aws rds create-global-cluster --region primary_region \
    --global-cluster-identifier global_database_id \
    --engine aurora-postgresql \
    --engine-version version # optional
```

   For Windows:

```
aws rds create-global-cluster ^
    --global-cluster-identifier global_database_id ^
    --engine aurora-postgresql ^
    --engine-version version # optional
```

   When the Aurora global database is available, you can create its primary Aurora DB cluster.

2. To create a primary Aurora DB cluster, use the `create-db-cluster` CLI command. Include the name of your Aurora global database by using the `--global-cluster-identifier` parameter.

   For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
  --region primary_region \
  --db-cluster-identifier primary_db_cluster_id \
  --master-username userid \
  --master-user-password password \
  --engine aurora-postgresql \
  --engine-version version \
  --global-cluster-identifier global_database_id
```

   For Windows:

```
aws rds create-db-cluster ^
  --region primary_region ^
  --db-cluster-identifier primary_db_cluster_id ^
  --master-username userid ^
```

```
  --master-user-password password ^
  --engine aurora-postgresql ^
  --engine-version version ^
  --global-cluster-identifier global_database_id
```

Check that the Aurora DB cluster is ready. When the response from the following command shows `"Status": "available"` for the Aurora DB cluster, you can continue.

```
aws rds describe-db-clusters --region primary_region --db-cluster-
identifier primary_db_cluster_id
```

3. Create the DB instance for your primary Aurora DB cluster. To do so, use the `create-db-instance` CLI command.

   Pass the name of your Aurora DB cluster with the `--db-cluster-identifier` parameter.

   You don't need to pass the `--master-username` and `--master-user-password` parameters in the command, because it gets those from the Aurora DB cluster.

   For the `--db-instance-class`, you can use only those from the memory optimized classes, such as `db.r5.large`. We recommend that you use a db.r5 or higher instance class. For information about these classes, see DB instance class types.

   For Linux, macOS, or Unix:

```
aws rds create-db-instance \
  --db-cluster-identifier primary_db_cluster_id \
  --db-instance-class instance_class \
  --db-instance-identifier db_instance_id \
  --engine aurora-postgresql \
  --engine-version version \
  --region primary_region
```

   For Windows:

```
aws rds create-db-instance ^
  --db-cluster-identifier primary_db_cluster_id ^
  --db-instance-class instance_class ^
  --db-instance-identifier db_instance_id ^
  --engine aurora-postgresql ^
  --engine-version version ^
```

```
  --region primary_region
```

4. Check the status of the Aurora DB instance before continuing.

   ```
   aws rds describe-db-clusters --db-cluster-identifier primary_db_cluster_id
   ```

   If the response shows that Aurora DB instance status is `available`, you can create another Aurora DB instance for your primary DB cluster.

5. To create an Aurora Replica for Aurora DB cluster, use the `create-db-instance` CLI command.

   For Linux, macOS, or Unix:

   ```
   aws rds create-db-instance \
     --db-cluster-identifier primary_db_cluster_id \
     --db-instance-class instance_class \
     --db-instance-identifier replica_db_instance_id \
     --engine aurora-postgresql
   ```

   For Windows:

   ```
   aws rds create-db-instance ^
     --db-cluster-identifier primary_db_cluster_id ^
     --db-instance-class instance_class ^
     --db-instance-identifier replica_db_instance_id ^
     --engine aurora-postgresql
   ```

When the DB instance is available, replication begins from the writer node to the replica. Before continuing, check that the DB instance is available with the `describe-db-instances` CLI command.

Your Aurora global database exists, but it has only its primary Region with an Aurora DB cluster made up of a writer DB instance and an Aurora Replica. You can now add a read-only Aurora DB cluster in a different Region to complete your Aurora global database. To do so, follow the steps in Adding an Amazon Web Services Region to an Amazon Aurora global database.

RDS API

To create an Aurora global database with the RDS API, run the CreateGlobalCluster operation.

Adding an Amazon Web Services Region to an Amazon Aurora global database

You can use the following procedure to add an additional secondary cluster to an existing global database. You can also create a global database from a standalone Aurora DB cluster by using this procedure to add the first secondary Amazon Region.

An Aurora global database needs at least one secondary Aurora DB cluster in a different Amazon Web Services Region than the primary Aurora DB cluster. You can attach up to 10 secondary DB clusters to your Aurora global database. Repeat the following procedure for each new secondary DB cluster. For each secondary DB cluster that you add to your Aurora global database, reduce the number of Aurora Replicas allowed to the primary DB cluster by one.

For example, if your Aurora global database has 10 secondary Regions, your primary DB cluster can have only 5 (rather than 15) Aurora Replicas. For more information, see Configuration requirements of an Amazon Aurora global database.

The number of Aurora Replicas (reader instances) in the primary DB cluster determines the number of secondary DB clusters you can add. The total number of reader instances in the primary DB cluster plus the number of secondary clusters can't exceed 15. For example, if you have 14 reader instances in the primary DB cluster and 1 secondary cluster, you can't add another secondary cluster to the global database.


Note

For Aurora MySQL version 3, when you create a secondary cluster, make sure that the value of `lower_case_table_names` matches the value in the primary cluster. This setting is a database parameter that affects how the server handles identifier case sensitivity. For more information about database parameters, see Parameter groups for Amazon Aurora.
We recommend that when you create a secondary cluster, you use the same DB engine version for the primary and secondary. If necessary, upgrade the primary to be the same version as the secondary. For more information, see Patch level compatibility for managed cross-Region switchovers and failovers.

Console

To add an Amazon Web Services Region to an Aurora global database


1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane of the Amazon Web Services Management Console, choose **Databases**.
3. Choose the Aurora global database that needs a secondary Aurora DB cluster. Ensure that the primary Aurora DB cluster is `Available`.
4. For **Actions**, choose **Add Amazon Region**.

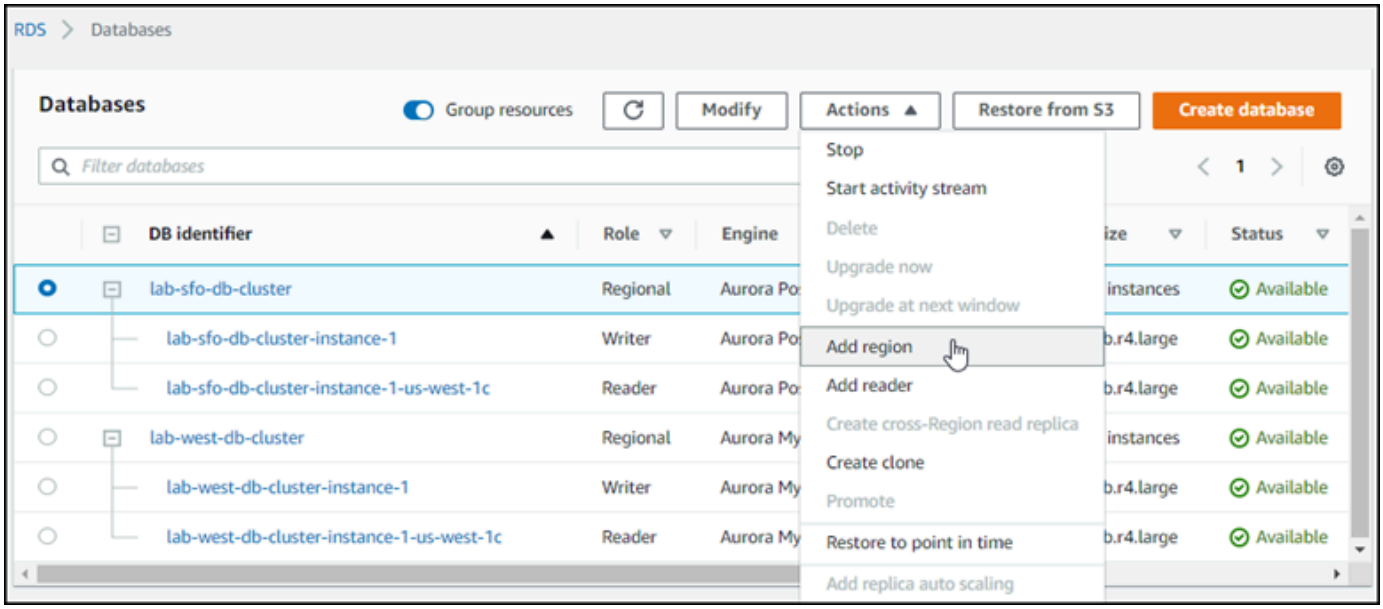

5. On the **Add a region** page, choose the secondary Amazon Web Services Region.


   You can't choose an Amazon Web Services Region that already has a secondary Aurora DB cluster for the same Aurora global database. Also, it can't be the same Region as the primary Aurora DB cluster.

> **Note**
>
> Babelfish for Aurora PostgreSQL global databases works in secondary regions only if the parameters that control Babelfish preferences are turned on in those regions. For more information, see DB cluster parameter group settings for Babelfish

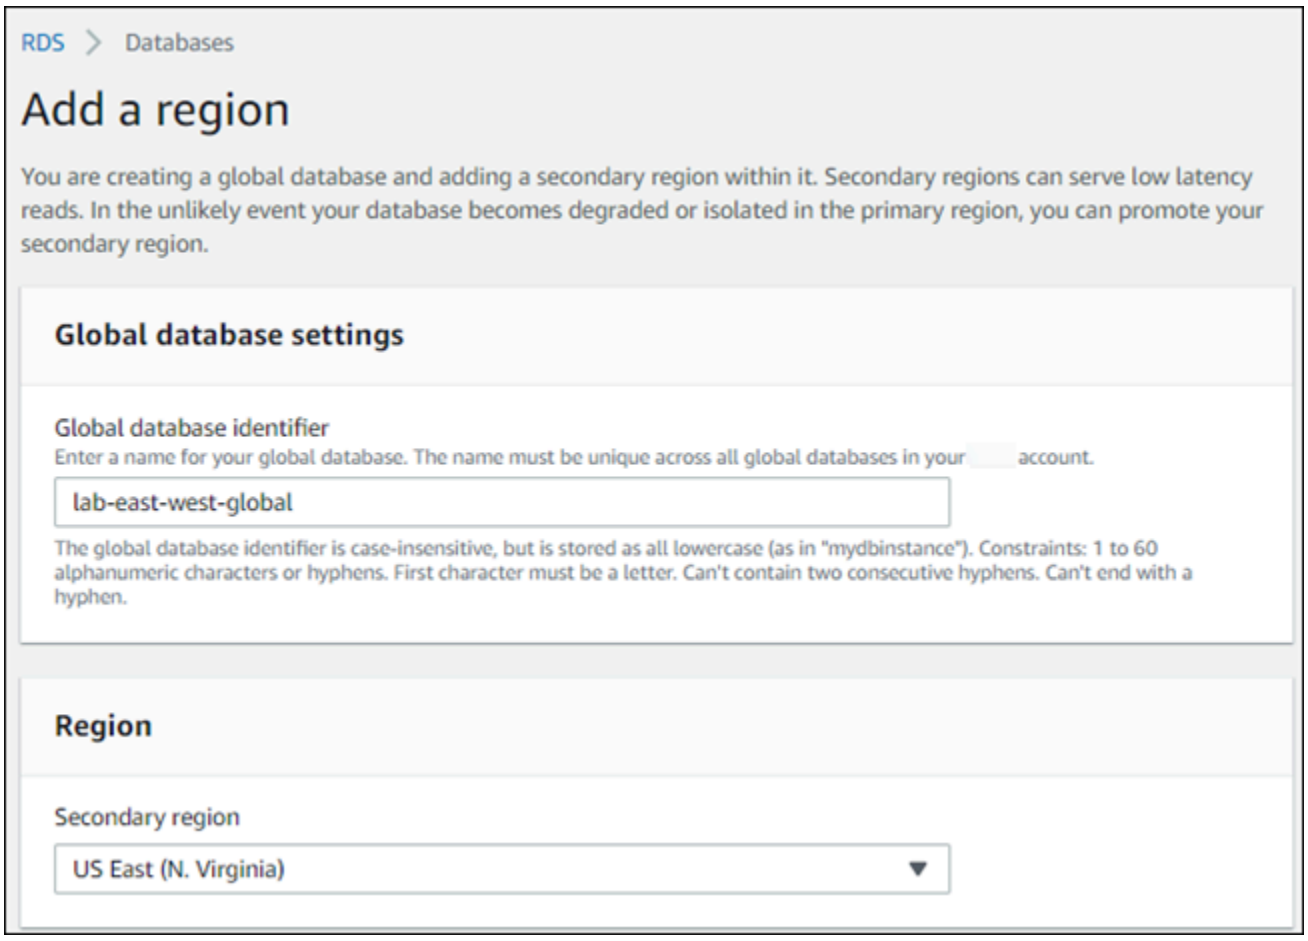


6. Complete the remaining fields for the secondary Aurora cluster in the new Amazon Region. These are the same configuration options as for any Aurora DB cluster instance, except for the following option for Aurora MySQL–based Aurora global databases only:

   - Enable read replica write forwarding – This optional setting let's your Aurora global database's secondary DB clusters forward write operations to the primary cluster. For more information, see Using write forwarding in an Amazon Aurora global database.

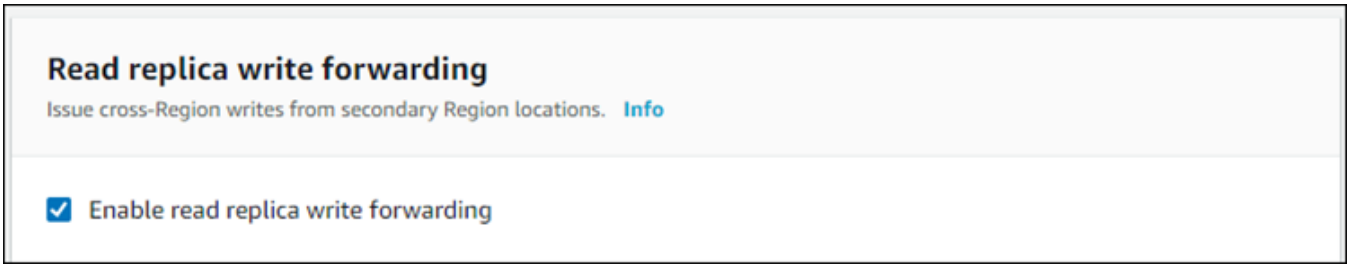

7. Choose **Add Amazon Region**.

After you finish adding the Region to your Aurora global database, you can see it in the list of **Databases** in the Amazon Web Services Management Console as shown in the screenshot.

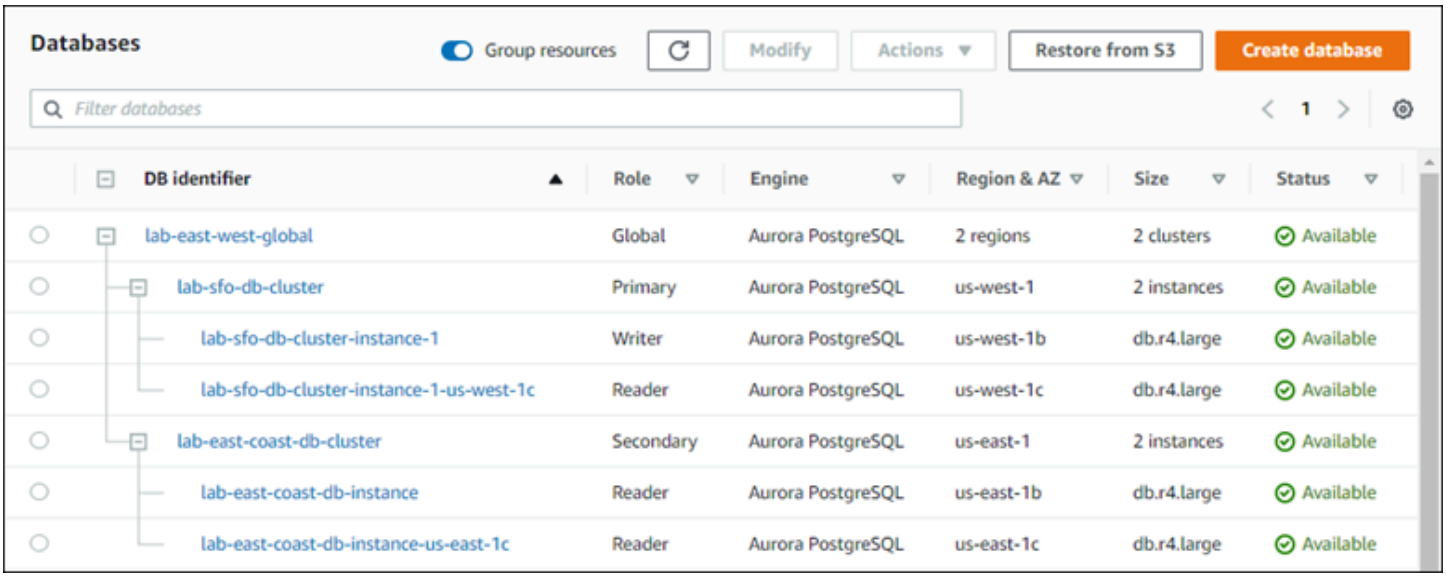

Amazon CLI

To add a secondary Amazon Web Services Region to an Aurora global database

To add a secondary cluster to your global database using the CLI, you must already have the global cluster container object. If you haven't already run the `create-global-cluster` command, see the CLI procedure in Creating an Amazon Aurora global database.

1. Use the `create-db-cluster` CLI command with the name (`--global-cluster-identifier`) of your Aurora global database. For other parameters, do the following:
2. For `--region`, choose a different Amazon Web Services Region than that of your Aurora primary Region.
3. Choose specific values for the `--engine` and `--engine-version` parameters. These values are the same as those for the primary Aurora DB cluster in your Aurora global database.
4. For an encrypted cluster, specify your primary Amazon Web Services Region as the `--source-region` for encryption.

The following example creates a new Aurora DB cluster and attaches it to an Aurora global database as a read-only secondary Aurora DB cluster. In the last step, an Aurora DB instance is added to the new Aurora DB cluster.

For Linux, macOS, or Unix:

```
aws rds --region secondary_region \
  create-db-cluster \
    --db-cluster-identifier secondary_cluster_id \
    --global-cluster-identifier global_database_id \
    --engine aurora-mysql | aurora-postgresql \
    --engine-version version

aws rds --region secondary_region \
  create-db-instance \
    --db-instance-class instance_class \
    --db-cluster-identifier secondary_cluster_id \
    --db-instance-identifier db_instance_id \
    --engine aurora-mysql | aurora-postgresql
```

For Windows:

```
aws rds --region secondary_region ^
  create-db-cluster ^
    --db-cluster-identifier secondary_cluster_id ^
    --global-cluster-identifier global_database_id_id ^
    --engine aurora-mysql | aurora-postgresql ^
    --engine-version version

aws rds --region secondary_region ^
  create-db-instance ^
    --db-instance-class instance_class ^
    --db-cluster-identifier secondary_cluster_id ^
    --db-instance-identifier db_instance_id ^
    --engine aurora-mysql | aurora-postgresql
```

RDS API

To add a new Amazon Web Services Region to an Aurora global database with the RDS API, run the CreateDBCluster operation. Specify the identifier of the existing global database using the `GlobalClusterIdentifier` parameter.

Creating a headless Aurora DB cluster in a secondary Region

Although an Aurora global database requires at least one secondary Aurora DB cluster in a different Amazon Web Services Region than the primary, you can use a *headless* configuration for the secondary cluster. A headless secondary Aurora DB cluster is one without a DB instance. This

type of configuration can lower expenses for an Aurora global database. In an Aurora DB cluster, compute and storage are decoupled. Without the DB instance, you're not charged for compute, only for storage. If it's set up correctly, a headless secondary's storage volume is kept in-sync with the primary Aurora DB cluster.

You add the secondary cluster as you normally do when creating an Aurora global database. If you are creating all the clusters in the global database, follow the procedure in Creating an Amazon Aurora global database. If you already have a DB cluster to use as the primary cluster, follow the procedure in Adding an Amazon Web Services Region to an Amazon Aurora global database.

After the primary Aurora DB cluster begins replication to the secondary, you delete the Aurora read-only DB instance from the secondary Aurora DB cluster. This secondary cluster is now considered "headless" because it no longer has a DB instance. Even without any DB instance in the secondary cluster, Aurora keeps the storage volume in sync with the primary Aurora DB cluster.

> **Warning**
>
> With Aurora PostgreSQL, to create a headless cluster in a secondary Amazon Web Services Region, use the Amazon CLI or RDS API to add the secondary Amazon Web Services Region. Skip the step to create the reader DB instance for the secondary cluster. Currently, creating a headless cluster isn't supported in the RDS Console. For the CLI and API procedures to use, see Adding an Amazon Web Services Region to an Amazon Aurora global database.
> If your global database is using an Aurora PostgreSQL engine version lower than 13.4, 12.8, or 11.13, creating a reader DB instance in a secondary Region and subsequently deleting it could lead to an Aurora PostgreSQL vacuum issue on the primary Region's writer DB instance. If you encounter this issue, restart the primary Region's writer DB instance after you delete the secondary Region's reader DB instance.

To add a headless secondary Aurora DB cluster to your Aurora global database

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane of the Amazon Web Services Management Console, choose **Databases**.
3. Choose the Aurora global database that needs a secondary Aurora DB cluster. Ensure that the primary Aurora DB cluster is `Available`.
4. For **Actions**, choose **Add Amazon Region**.


5. On the **Add a region** page, choose the secondary Amazon Web Services Region.

   You can't choose an Amazon Web Services Region that already has a secondary Aurora DB cluster for the same Aurora global database. Also, it can't be the same Region as the primary Aurora DB cluster.

6. Complete the remaining fields for the secondary Aurora cluster in the new Amazon Web Services Region. These are the same configuration options as for any Aurora DB cluster instance.

   For an Aurora MySQL–based Aurora global database, disregard the **Enable read replica write forwarding** option. This option has no function after you delete the reader instance.

7. Choose **Add Amazon Region**. After you finish adding the Region to your Aurora global database, you can see it in the list of **Databases** in the Amazon Web Services Management Console as shown in the screenshot.

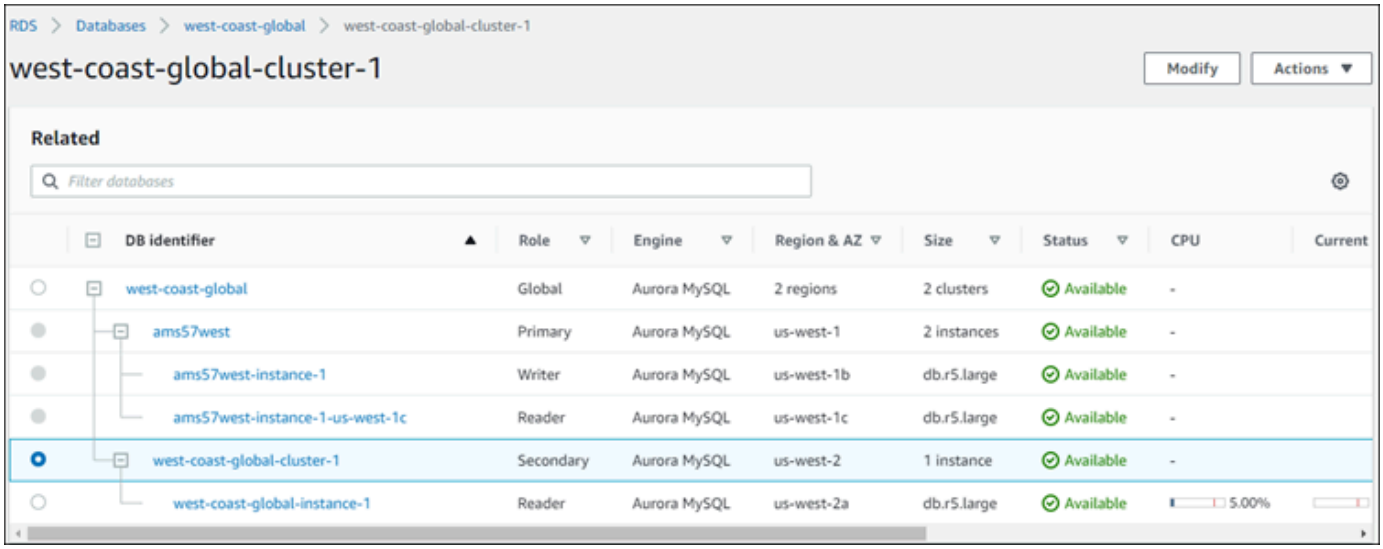


8. Check the status of the secondary Aurora DB cluster and its reader instance before continuing, by using the Amazon Web Services Management Console or the Amazon CLI. For example:


```
$ aws rds describe-db-clusters --db-cluster-identifier secondary-cluster-id --query
 '*[].[Status]' --output text
```

   It can take several minutes for the status of a newly added secondary Aurora DB cluster to change from `creating` to `available`. When the Aurora DB cluster is available, you can delete the reader instance.

9. Select the reader instance in the secondary Aurora DB cluster, and then choose **Delete**.

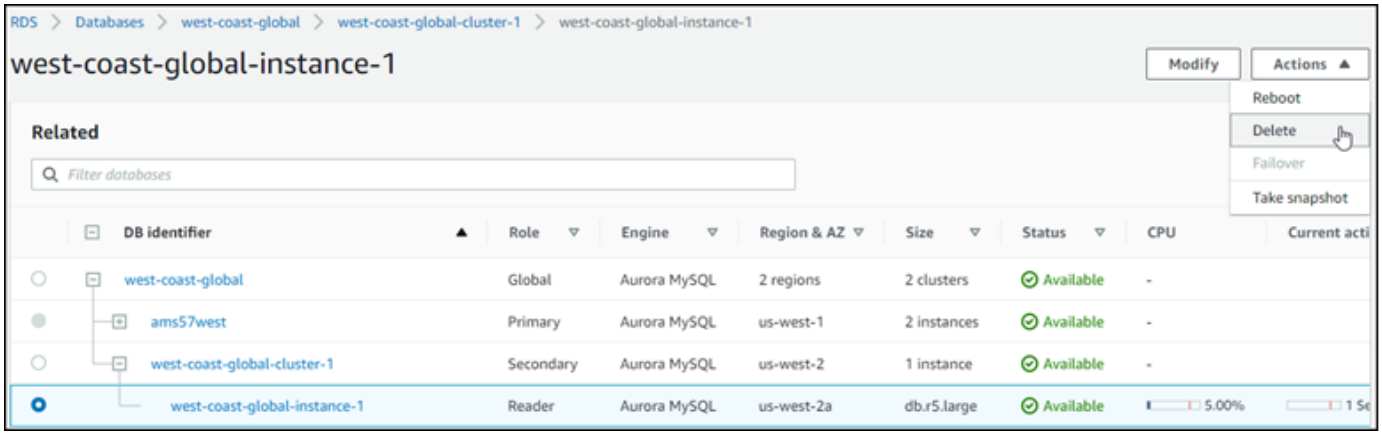

After deleting the reader instance, the secondary cluster remains part of the Aurora global database. It has no instance associated with it, as shown following.

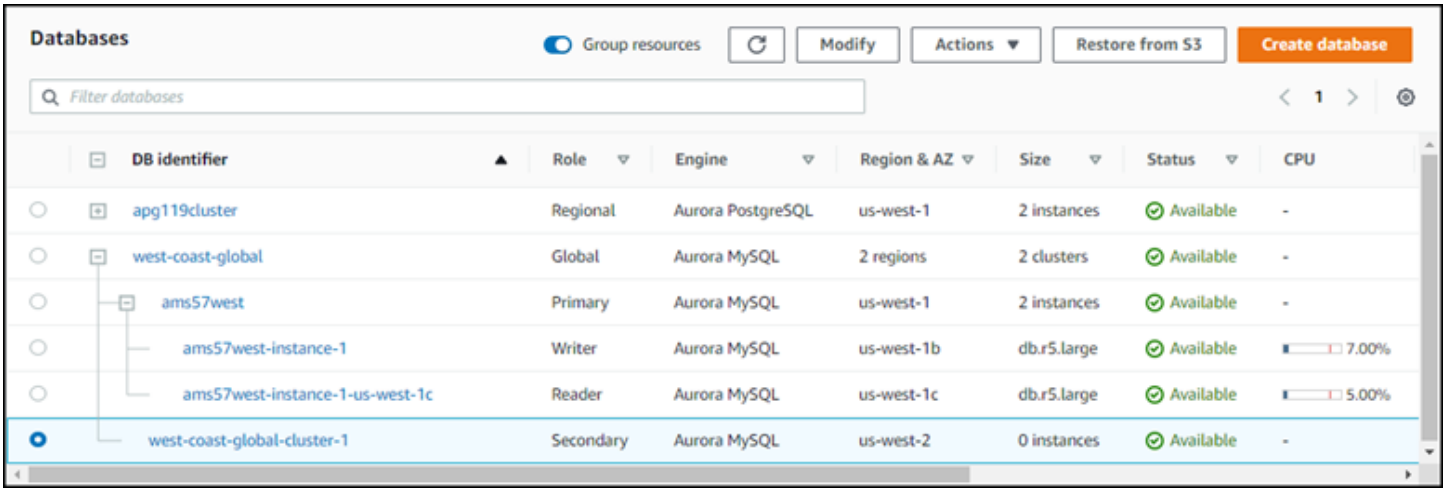

You can use this headless secondary Aurora DB cluster to manually recover your Amazon Aurora global database from an unplanned outage in the primary Amazon Web Services Region if such an outage occurs.


Creating an Amazon Aurora global database from an Aurora or Amazon RDS snapshot

You can restore a snapshot of an Aurora DB cluster or from an Amazon RDS DB instance to use as the starting point for your Aurora global database. You restore the snapshot and create a new Aurora provisioned DB cluster at the same time. You then add another Amazon Web Services Region to the restored DB cluster, thus turning it into an Aurora global database. Any Aurora DB cluster that you create using a snapshot in this way becomes the primary cluster of your Aurora global database.

The snapshot that you use can be from a `provisioned` or from a `serverless` Aurora DB cluster.

During the restore process, choose the same DB engine type as the snapshot. For example, suppose that you want to restore a snapshot that was made from an Aurora Serverless DB cluster running Aurora PostgreSQL. In this case, you create an Aurora PostgreSQL DB cluster using that same Aurora DB engine and version.

The restored DB cluster assumes the role of primary cluster for the Aurora global database when you add an Amazon Web Services Region to it. All data contained in this primary cluster is replicated to any secondary clusters that you add to your Aurora global database.

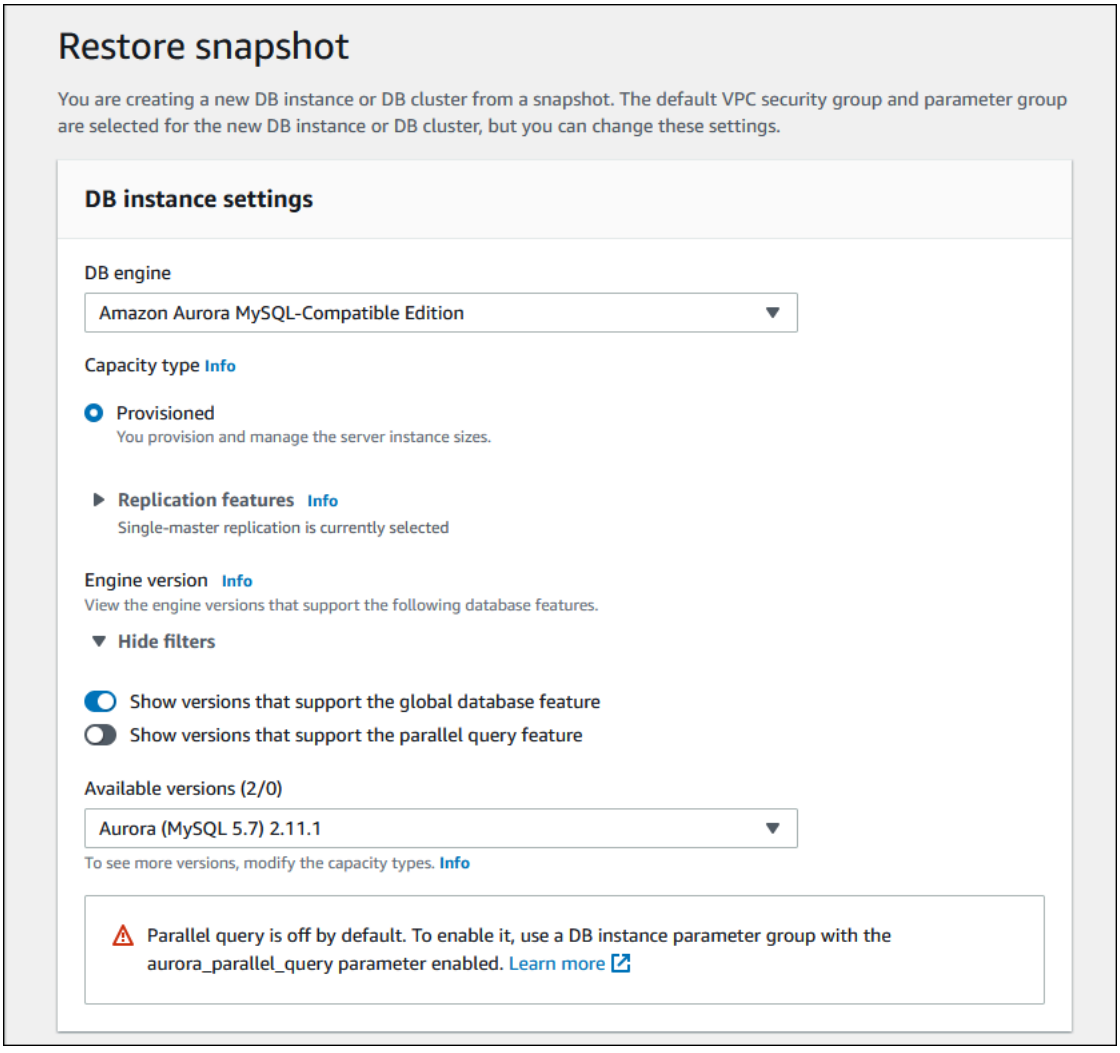

Managing an Amazon Aurora global database

You perform most management operations on the individual clusters that make up an Aurora global database. When you choose **Group related resources** on the **Databases** page in the console,

you see the primary cluster and secondary clusters grouped under the associated global database. To find the Amazon Web Services Regions where a global database's DB clusters are running, its Aurora DB engine and version, and its identifier, use its **Configuration** tab.

The cross-Region database failover processes are available to Aurora global databases only, not for a single Aurora DB cluster. To learn more, see Using switchover or failover in Amazon Aurora Global Database.


To recover an Aurora global database from an unplanned outage in its primary Region, see Recovering an Amazon Aurora global database from an unplanned outage.

Topics


- Modifying an Amazon Aurora global database
- Modifying parameters for an Aurora global database
- Removing a cluster from an Amazon Aurora global database
- Deleting an Amazon Aurora global database
- Tagging Amazon Aurora Global Database resources

Modifying an Amazon Aurora global database

The **Databases** page in the Amazon Web Services Management Console lists all your Aurora global databases, showing the primary cluster and secondary clusters for each one. The Aurora global database has its own configuration settings. Specifically, it has Amazon Web Services Regions associated with its primary and secondary clusters, as shown in the screenshot following.

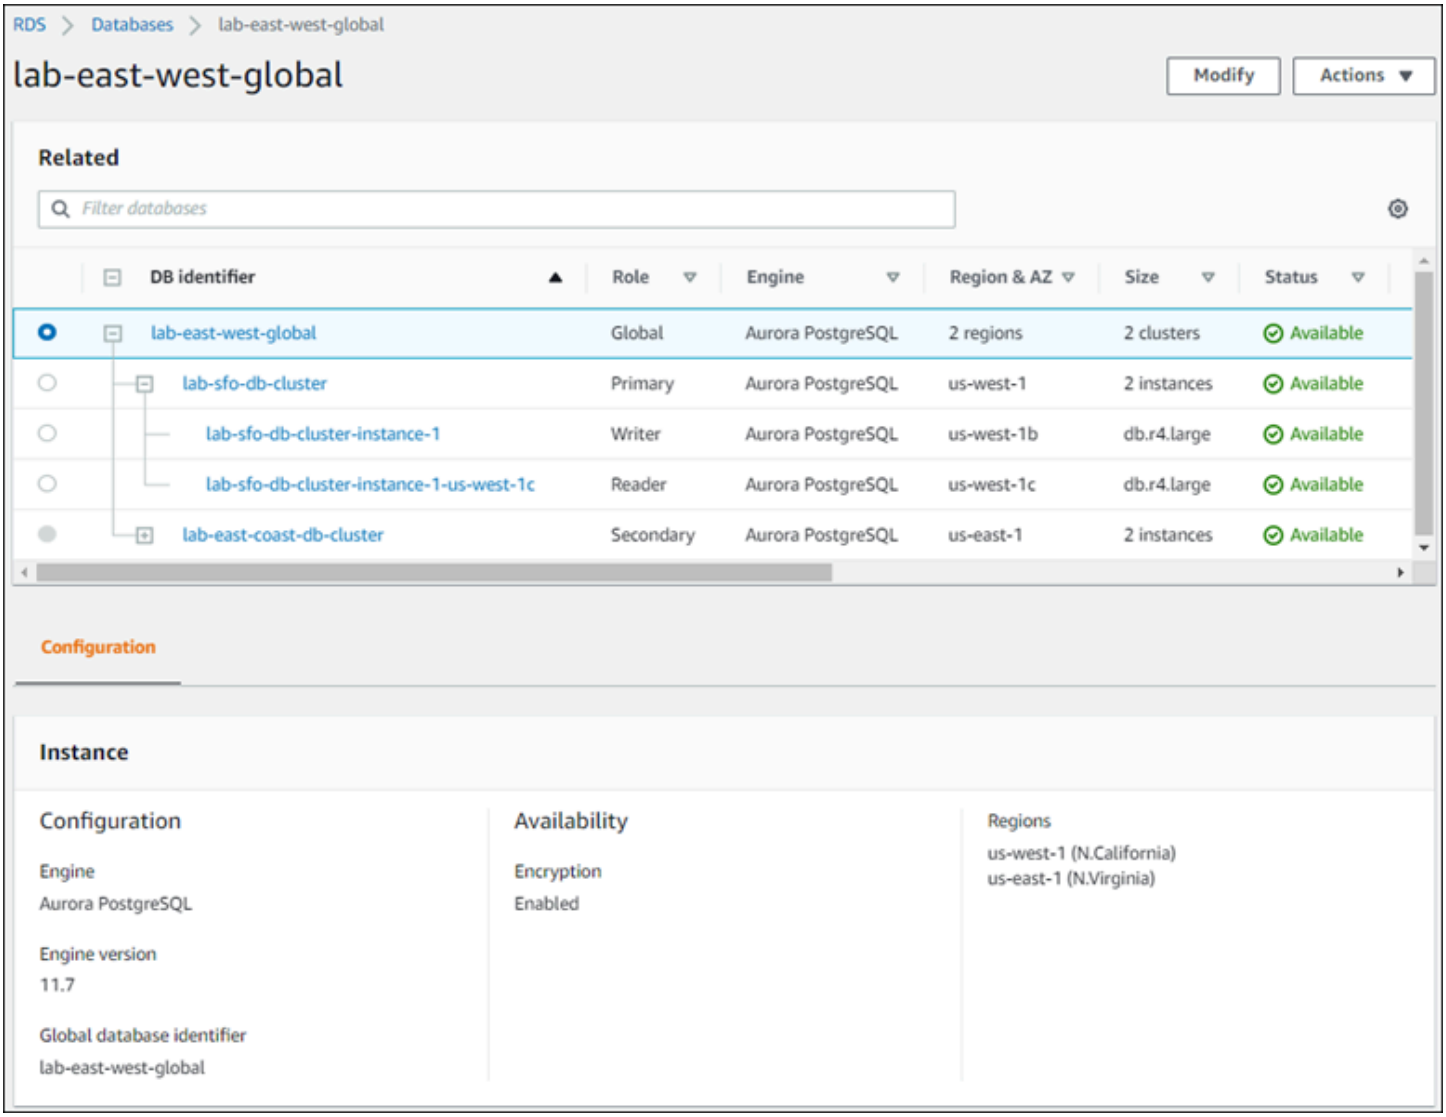

When you make changes to the Aurora global database, you have a chance to cancel changes, as shown in the following screenshot.

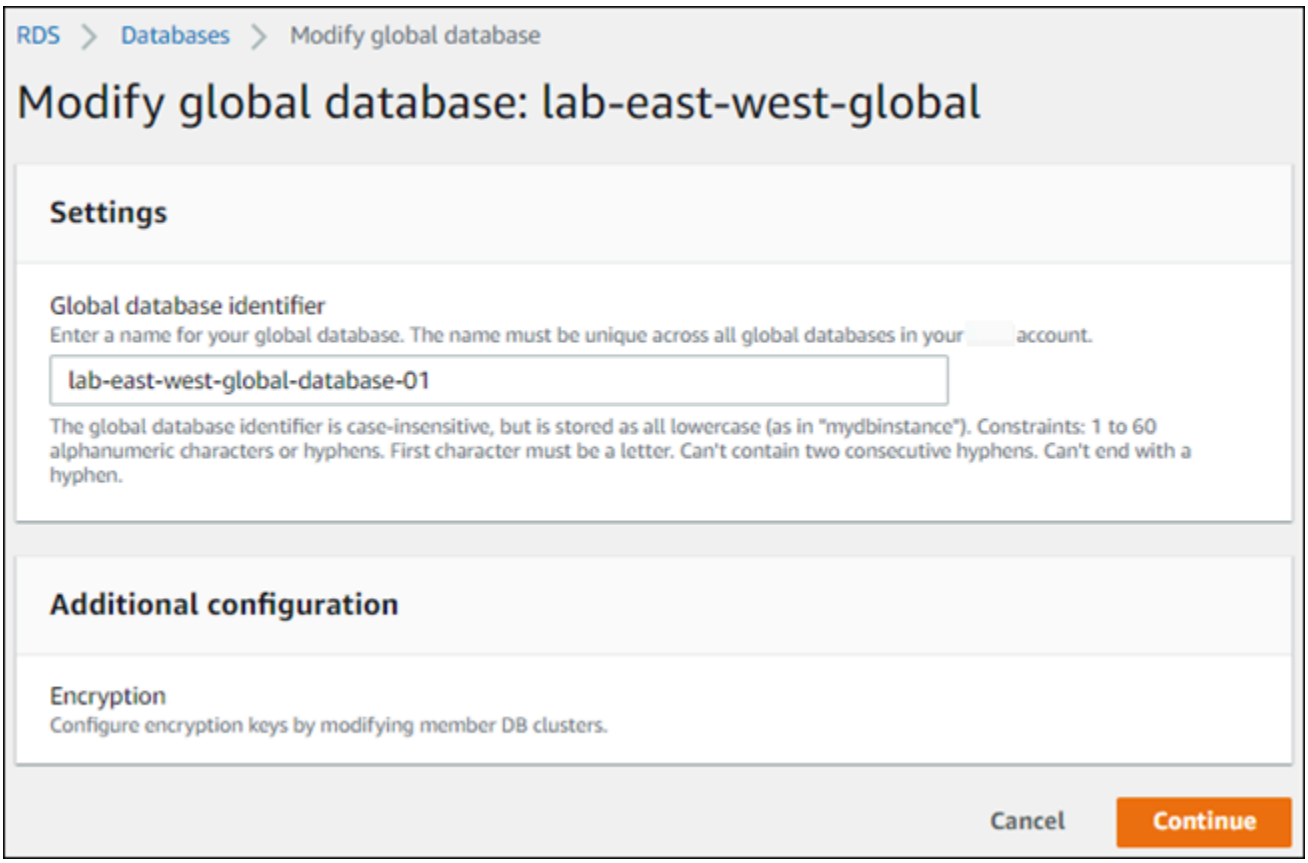

When you choose **Continue**, you confirm the changes.

Modifying parameters for an Aurora global database

You can configure the Aurora DB cluster parameter groups independently for each Aurora cluster within the Aurora global database. Most parameters work the same as for other kinds of Aurora clusters. We recommend that you keep settings consistent among all the clusters in a global database. Doing this helps to avoid unexpected behavior changes if you promote a secondary cluster to be the primary.

For example, use the same settings for time zones and character sets to avoid inconsistent behavior if a different cluster takes over as the primary cluster.

The `aurora_enable_repl_bin_log_filtering` and `aurora_enable_replica_log_compression` configuration settings have no effect.

Removing a cluster from an Amazon Aurora global database

You can remove Aurora DB clusters from your Aurora global database for several different reasons. For example, you might want to remove an Aurora DB cluster from an Aurora global database

if the primary cluster becomes degraded or isolated. It then becomes a standalone provisioned Aurora DB cluster that could be used to create a new Aurora global database. To learn more, see Recovering an Amazon Aurora global database from an unplanned outage.

You also might want to remove Aurora DB clusters because you want to delete an Aurora global database that you no longer need. You can't delete the Aurora global database until after you remove (detach) all associated Aurora DB clusters, leaving the primary for last. For more information, see Deleting an Amazon Aurora global database.


When an Aurora DB cluster is detached from the Aurora global database, it's no longer synchronized with the primary. It becomes a standalone provisioned Aurora DB cluster with full read/write capabilities.

You can remove Aurora DB clusters from your Aurora global database using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.


Console

To remove an Aurora cluster from an Aurora global database

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose the cluster on the **Databases** page.
3. For **Actions**, choose **Remove from Global**.

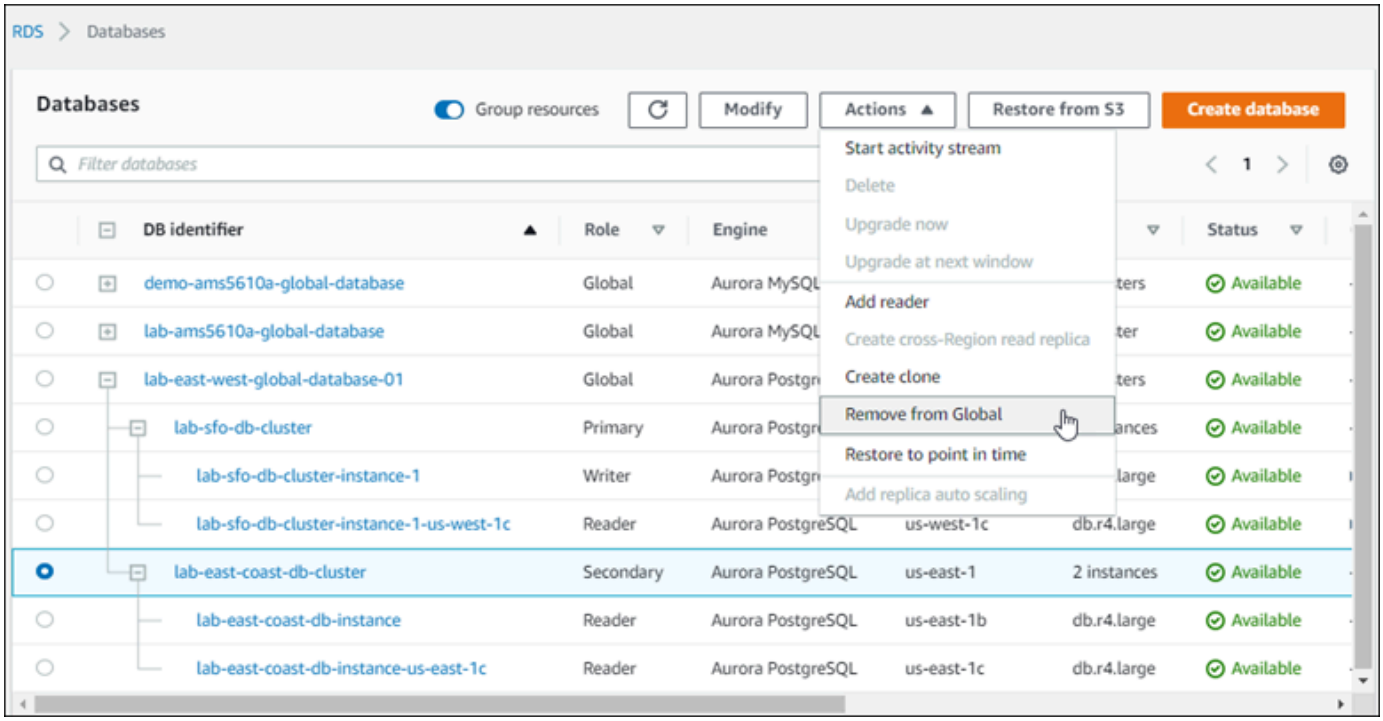


You see a prompt to confirm that you want to detach the secondary from the Aurora global database.

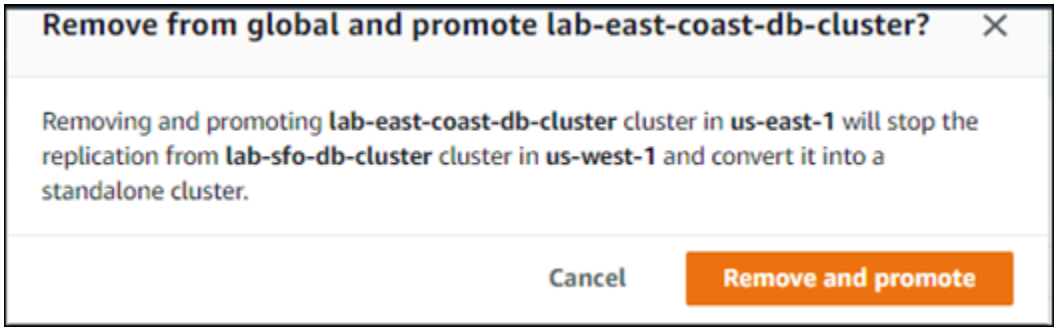

4. Choose **Remove and promote** to remove the cluster from the global database.

The Aurora DB cluster is no longer serving as a secondary in the Aurora global database, and is no longer synchronized with the primary DB cluster. It is a standalone Aurora DB cluster with full read/write capability.

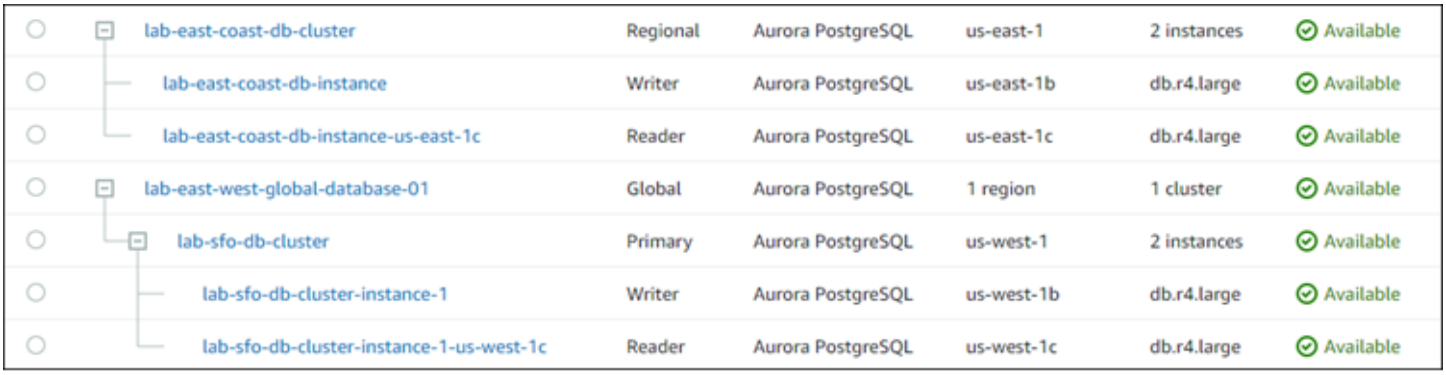

After you remove or delete all secondary clusters, then you can remove the primary cluster the same way. You can't detach (remove) the primary Aurora DB cluster from an Aurora global database until after you remove all secondary clusters.

The Aurora global database might remain in the **Databases** list, with zero Regions and AZs. You can delete if you no longer want to use this Aurora global database. For more information, see Deleting an Amazon Aurora global database.

Amazon CLI

To remove an Aurora cluster from an Aurora global database, run the remove-from-global-cluster CLI command with the following parameters:

- `--global-cluster-identifier` – The name (identifier) of your Aurora global database.
- `--db-cluster-identifier` – The name of each Aurora DB cluster to remove from the Aurora global database. Remove all secondary Aurora DB clusters before removing the primary.

The following examples first remove a secondary cluster and then the primary cluster from an Aurora global database.

For Linux, macOS, or Unix:

```
aws rds --region secondary_region \
  remove-from-global-cluster \
    --db-cluster-identifier secondary_cluster_ARN \
    --global-cluster-identifier global_database_id

aws rds --region primary_region \
  remove-from-global-cluster \
    --db-cluster-identifier primary_cluster_ARN \
    --global-cluster-identifier global_database_id
```

Repeat the `remove-from-global-cluster --db-cluster-identifier` *`secondary_cluster_ARN`* command for each secondary Amazon Web Services Region in your Aurora global database.

For Windows:

```
aws rds --region secondary_region ^
  remove-from-global-cluster ^
    --db-cluster-identifier secondary_cluster_ARN ^
    --global-cluster-identifier global_database_id

aws rds --region primary_region ^
  remove-from-global-cluster ^
    --db-cluster-identifier primary_cluster_ARN ^
    --global-cluster-identifier global_database_id
```

Repeat the `remove-from-global-cluster --db-cluster-identifier` *`secondary_cluster_ARN`* command for each secondary Amazon Web Services Region in your Aurora global database.

RDS API

To remove an Aurora cluster from an Aurora global database with the RDS API, run the RemoveFromGlobalCluster action.

Deleting an Amazon Aurora global database

Because an Aurora global database typically holds business-critical data, you can't delete the global database and its associated clusters in a single step. To delete an Aurora global database, do the following:

- Remove all secondary DB clusters from the Aurora global database. Each cluster becomes a standalone Aurora DB cluster. To learn how, see Removing a cluster from an Amazon Aurora global database.
- From each standalone Aurora DB cluster, delete all Aurora Replicas.
- Remove the primary DB cluster from the Aurora global database. This becomes a standalone Aurora DB cluster.
- From the Aurora primary DB cluster, first delete all Aurora Replicas, then delete the writer DB instance.

Deleting the writer instance from the newly standalone Aurora DB cluster also typically removes the Aurora DB cluster and the Aurora global database.

For more general information, see Deleting a DB instance from an Aurora DB cluster.


To delete an Aurora global database, you can use the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To delete an Aurora global database

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases** and find the Aurora global database you want to delete in the listing.
3. Confirm that all clusters are removed from the Aurora global database. The Aurora global database should show 0 Regions and AZs and a size of 0 clusters.

   If the Aurora global database contains any Aurora DB clusters, you can't delete it. If necessary, detach the primary and secondary Aurora DB clusters from the Aurora global database. For more information, see Removing a cluster from an Amazon Aurora global database.
4. Choose your Aurora global database in the list, and then choose **Delete** from the **Actions** menu.

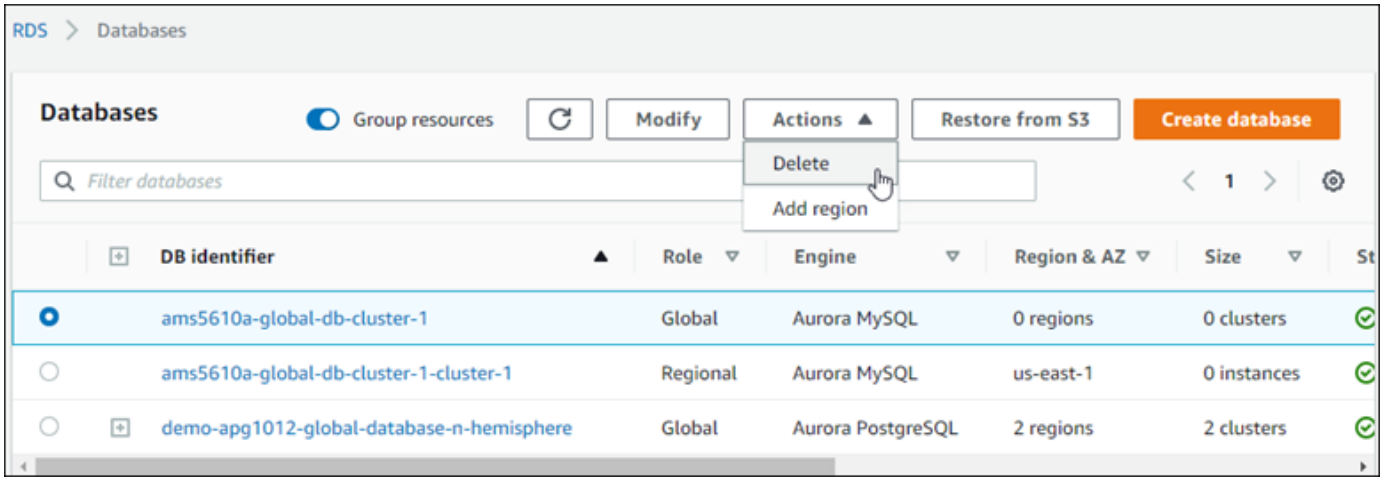

Amazon CLI

To delete an Aurora global database, run the delete-global-cluster CLI command with the name of the Amazon Web Services Region and the Aurora global database identifier, as shown in the following example.

For Linux, macOS, or Unix:

```
aws rds --region primary_region delete-global-cluster \
   --global-cluster-identifier global_database_id
```

For Windows:

```
aws rds --region primary_region delete-global-cluster ^
   --global-cluster-identifier global_database_id
```

RDS API

To delete a cluster that is part of an Aurora global database, run the DeleteGlobalCluster API operation.

Tagging Amazon Aurora Global Database resources

With the Aurora Global Database feature, you can apply RDS tags to resources at different levels within a global database. If you aren't familiar with how tags are used with Amazon or Aurora resources, see Tagging Amazon Aurora andAmazon RDS resources before applying tags within your global database.

> **Note**
>
> Because Amazon processes tag data as part of its cost-reporting mechanisms, don't include any sensitive data or personally identifiable information (PII) in the tag names or values.

You can apply tags to the following kinds of resources within a global database:

- The container object for your entire global database. This resource is known as the global cluster.

  After you create the global cluster by performing an **Add Amazon Region** operation in the console, you can add tags by using the details page for the global cluster. On the **Tags** tab within

the global cluster details page, you can add, remove, or modify tags and their associated values by choosing **Manage tags**.

With the Amazon CLI and RDS API, you can add tags to the global cluster at the same time you create it. You can also add, remove, or modify tags for an existing global cluster.

- The primary cluster. You use the same procedures for working with tags here as for standalone Aurora clusters. You can set up the tags before turning the original Aurora cluster into a global database. You can also add, remove, or modify tags and their associated values by choosing **Manage tags** on the **Tags** tab within the DB cluster details page.
- Any secondary clusters. You use the same procedures for working with tags here as for standalone Aurora clusters. You can set up the tags at the same time as you create a secondary Aurora cluster by using the **Add Amazon Region** action in the console. You can also add, remove, or modify tags and their associated values by choosing **Manage tags** on the **Tags** tab within the DB cluster details page.
- Individual DB instances within the primary or secondary clusters. You use the same procedures for working with tags here as for Aurora or RDS DB instances. You can set up the tags at the same time as you add a new DB instance to the Aurora cluster by using the **Add reader** action in the console. You can also add, remove, or modify tags and their associated values by choosing **Manage tags** on the **Tags** tab within the DB instance details page.

Here are some examples of the kinds of tags you might assign within a global database:

- You might add tags to the global cluster to record overall information about your application, such as anonymized identifiers representing owners and contacts within your organization. You might use tags to represent properties of the application that uses the global database.
- You might add tags to the primary cluster and secondary clusters to track costs for your application at the Amazon Region level. For details about that procedure, see How Amazon billing works with tags in Amazon RDS.
- You might add tags to specific DB instances with the Aurora clusters to indicate their special purpose. For example, within the primary cluster, you might have a reader instance with a low failover priority that is used exclusively for report generation. A tag can distinguish this special-purpose DB instance from other instances that are dedicated to high availability within the primary cluster.
- You might use tags at all levels of your global database resources to control access through IAM policies. For more information, see Controlling access to Amazon resources in the *Amazon Identity and Access Management User Guide*.

> **Tip**
>
> In the Amazon Web Services Management Console, you add tags to the global cluster container as a separate step after you create it. If you want to avoid any time interval when the global cluster exists without access control tags, you can apply the tags during the `CreateGlobalCluster` operation by creating that resource through Amazon CLI, RDS API, or a Amazon CloudFormation template.

- You might use tags at the cluster level, or for the global cluster, to record information about quality assurance and testing of your application. For example, you might specify a tag on a DB cluster to record the last time you performed a switchover to that cluster. You might specify a tag on the global cluster to record the time of the last disaster recovery drill for the entire application.

Amazon CLI examples of tagging for global databases

The following Amazon CLI examples show how you can specify and examine tags for all the types of Aurora resources in your global database.

You can specify tags for the global cluster container with the `create-global-cluster` command. The following example creates a global cluster and assigns two tags to it. The tags have keys `tag1` and `tag2`.

```
$  aws rds create-global-cluster --global-cluster-identifier my_global_cluster_id \
  --engine aurora-mysql --tags Key=tag1,Value=val1 Key=tag2,Value=val2
```

You can list the tags on the global cluster container with the `describe-global-clusters` command. When working with tags, you typically run this command first to retrieve the Amazon Resource Name (ARN) of the global cluster. You use the ARN as a parameter in subsequent commands for working with tags. The following command displays the tag information in the `TagList` attribute. It also shows the ARN, which is used as a parameter in the later examples.

```
$  aws rds describe-global-clusters --global-cluster-identifier my_global_cluster_id
{
    "GlobalClusters": [
        {
            "Status": "available",
            "Engine": "aurora-mysql",
```

```
            "GlobalClusterArn": "my_global_cluster_arn",
            ...
            "TagList": [
                {
                    "Value": "val1",
                    "Key": "tag1"
                },
                {
                    "Value": "val2",
                    "Key": "tag2"
                }
            ]
        }
    ]
}
```

You can add new tags with the `add-tags-to-resource` command. With this command, you specify the Amazon Resource Name (ARN) of the global cluster instead of its identifier. Adding a tag with the same name as an existing tag overwrites the value of that tag. If you include spaces or special characters in the tag values, quote the values as appropriate for your operating system or command shell. The following example modifies the tags of the global cluster from the previous example. Originally, the cluster had tags with keys `tag1` and `tag2`. After the command finishes, the global cluster has a new tag with key `tag3`, and the tag with key `tag1` has a different value.

```
$  aws rds add-tags-to-resource --resource-name my_global_cluster_arn \
  --tags Key=tag1,Value="new value for tag1" Key=tag3,Value="entirely new tag"

$  aws rds describe-global-clusters --global-cluster-identifier my_global_cluster_id
{
    "GlobalClusters": [
        {
            "Status": "available",
            "Engine": "aurora-mysql",
            ...
            "TagList": [
                {
                    "Value": "new value for tag1",
                    "Key": "tag1"
                },
                {
                    "Value": "val2",
                    "Key": "tag2"
```

```
                },
                {
                    "Value": "entirely new tag",
                    "Key": "tag3"
                }
            ]
        }
    ]
}
```

You can delete a tag from the global cluster with the `remove-tags-from-resource` command. With this command, you specify only a set of tag keys, without any tag values. The following example modifies the tags of the global cluster from the previous example. Originally, the cluster had tags with keys `tag1`, `tag2`, and `tag3`. After the command finishes, only the tag with key `tag1` remains.

```
$  aws rds remove-tags-from-resource --resource-name my_global_cluster_arn --tag-keys
 tag2 tag3

$  aws rds describe-global-clusters --global-cluster-identifier my_global_cluster_id
{
    "GlobalClusters": [
        {
            "Status": "available",
            "Engine": "aurora-mysql",
            ...
            "TagList": [
                {
                    "Value": "new value for tag1",
                    "Key": "tag1"
                }
            ]
        }
    ]
}
```

Connecting to Amazon Aurora Global Database

Each Aurora Global Database comes with a writer endpoint that is automatically updated by Aurora to route requests to the current writer instance of the primary DB cluster. With the writer endpoint, you don't have to modify your connection string after you change the location of the

primary Region using the managed Aurora Global Database switchover and failover capabilities. To learn more about using the writer endpoint along with Aurora Global Database switchover and failover, see Using switchover or failover in Amazon Aurora Global Database. For information about connecting to an Aurora Global Database with RDS Proxy, see Using RDS Proxy with Aurora global databases.

Topics

- Choosing the endpoint that meets your application needs
- Viewing the endpoints of an Amazon Aurora global database
- Considerations with using Global writer endpoints

Choosing the endpoint that meets your application needs

Connecting to an Aurora Global Database depends on your need to read or write from the database and the Amazon Region you want to route your requests to. Here are a few typical use cases:

- **Routing requests to the writer instance**: Connect to the Aurora Global Database writer endpoint if you need to run data manipulation language (DML) and data definition language (DDL) statements, or if you need strong consistency between reads and writes. That endpoint routes requests to the writer instance in your global database's primary cluster. This endpoint is automatically updated to route requests to the writer instance, eliminating the need to update your application each time you change the writer location in your global cluster. You can also use the global endpoint to send cross-Region read/write requests to your writer.

> **Note**
>
> If you set up your global database before the Aurora Global Database writer endpoint was available, your application might connect to the cluster endpoint of the primary cluster. In this case, we recommend switching your connection settings to use the global writer endpoint instead. Doing so avoids the need to change your connection settings after every Aurora Global Database switchover or failover.
> The first part of the writer endpoint name is the name of your Aurora Global Database. Thus, if you rename your Aurora Global Database, the writer endpoint name changes, and any code that uses it must be updated with the new name.

- **Scaling reads closer to your application's region**: To scale read-only requests in the same or nearby Amazon Region as your application, connect to the reader endpoint of the primary or secondary Aurora clusters.
- **Scaling reads with occasional cross-region writes**: For occasional DML statements such as for maintenance and data cleanup, connect to the reader endpoint of a secondary cluster that has write forwarding enabled. With write forwarding, Aurora automatically forwards the write statements to the writer in the primary Region of your Aurora Global Database. Write forwarding provides the following benefits:
  - You don't need to do the heavy lifting to establish connectivity between the secondary and primary clusters to send cross-region writes.
  - You don't need to split read and write requests in the application.
  - You don't need to develop complex logic to manage consistency for read-after-write requests.

  However, with write forwarding, you do need to update your application code or configuration to connect to the newly promoted primary Region's reader endpoint after performing a cross-Region failover or switchover. We recommend that you monitor the latency of operations done through write forwarding, to check overhead of processing the write requests. Finally, write forwarding doesn't support certain MySQL or PostgreSQL operations, such as making data definition language (DDL) changes or `SELECT FOR UPDATE` statements.

  To learn more about using write forwarding across Amazon Regions, see Using write forwarding in an Amazon Aurora global database.


For details about the different kinds of Aurora endpoints, see Connecting to an Amazon Aurora DB cluster.

Viewing the endpoints of an Amazon Aurora global database

When you view an Aurora Global Database in the console, you can see all of the endpoints associated with all of its clusters. The following figure shows an example of the types of endpoints you see when you view the details for your primary DB cluster:

- Global writer – The single read/write endpoint that always points to the current writer DB instance for the global database cluster.
- Writer – The connection endpoint for read/write requests to the primary DB cluster in the global database cluster.

- Reader – The connection endpoint for read-only requests to a primary or secondary DB cluster in the global database cluster. To minimize latency, choose whichever reader endpoint is in your Amazon Web Services Region or the Amazon Web Services Region closest to you.

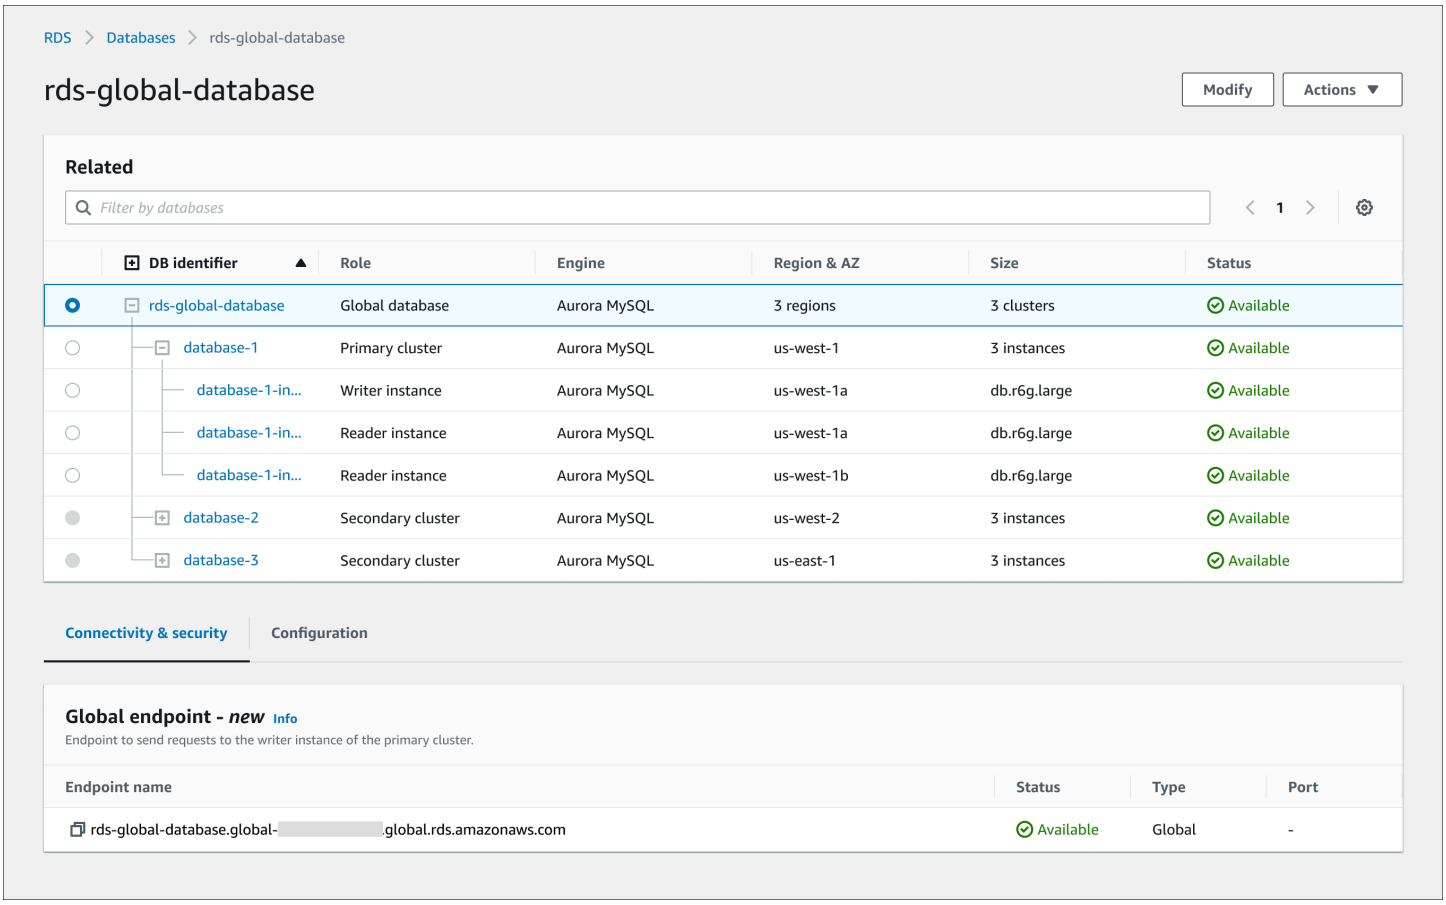

Console

To view the endpoints of a global database

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. In the list, choose the global database, or the primary or secondary DB cluster whose endpoints you want to view.
4. Choose the **Connectivity & security** tab to see the endpoint details. The endpoints displayed depend on the type of cluster you selected, as follows:

   - Global database – The global writer endpoint.

- Primary DB cluster – The global writer endpoint, and the cluster endpoint and reader endpoint for the primary cluster.
- Secondary DB cluster – The cluster endpoint and reader endpoint for the secondary cluster. On a secondary cluster, the cluster endpoint displays a status of **inactive** because it doesn't handle write requests. You can still connect to the cluster endpoint, but only for read queries.

Amazon CLI

To view the global cluster's writer endpoint, use the Amazon CLI describe-global-clusters command, as in the following example.

```
aws rds describe-global-clusters --region aws_region
{
    "GlobalClusters": [
        {
            "GlobalClusterIdentifier": "global_cluster_id",
            "GlobalClusterResourceId": "cluster-unique_string",
            "GlobalClusterArn": "arn:aws:rds::123456789012:global-
cluster:global_cluster_id",
            "Status": "available",
            "Engine": "aurora-mysql",
            "EngineVersion": "5.7.mysql_aurora.2.11.2",
            "GlobalClusterMembers": [

              ...
            ],
            "Endpoint":
 "global_cluster_id.global-unique_string.global.rds.amazonaws.com"
        }
    ]
}
```

To view the cluster and reader endpoints for member DB clusters of the global cluster, use the Amazon CLI describe-db-clusters command, as in the following example. The values returned for `Endpoint` and `ReaderEndpoint` are the cluster and reader endpoints, respectively.

```
aws rds describe-db-clusters --region primary_region --db-cluster-
identifier db_cluster_id
{
```

```
    "DBClusters": [
        {
            "AllocatedStorage": 1,
            "AvailabilityZones": [
                "az_1",
                "az_2",
                "az_3"
            ],
            "BackupRetentionPeriod": 1,
            "DBClusterIdentifier": "db_cluster_id",
            "DBClusterParameterGroup": "default.aurora-mysql5.7",
            "DBSubnetGroup": "default",
            "Status": "available",
            "EarliestRestorableTime": "2023-08-01T18:21:11.301Z",
            "Endpoint":
 "db_cluster_id.cluster-unique_string.primary_region.rds.amazonaws.com",
            "ReaderEndpoint": "db_cluster_id.cluster-
ro-unique_string.primary_region.rds.amazonaws.com",
            "MultiAZ": false,
            "Engine": "aurora-mysql",
            "EngineVersion": "5.7.mysql_aurora.2.11.2",

            "ReadReplicaIdentifiers": [
                "arn:aws:rds:secondary_region:123456789012:cluster:db_cluster_id"
            ],
            "DBClusterMembers": [
                {
                    "DBInstanceIdentifier": "db_instance_id",
                    "IsClusterWriter": true,
                    "DBClusterParameterGroupStatus": "in-sync",
                    "PromotionTier": 1
                }
            ],

            ...
            "TagList": [],
            "GlobalWriteForwardingRequested": false
        }
    ]
}
```

RDS API

To view the global cluster's writer endpoint, use the RDS API DescribeGlobalClusters operation. To view the cluster and reader endpoints for member DB clusters of the global cluster, use the RDS API DescribeDBClusters operation.

Considerations with using Global writer endpoints

You can make effective use of the Aurora Global Database writer endpoints by following these guidelines and best practices:

- To minimize disruption after a cross-Region failover or switchover, you can set up VPC connectivity between your application compute and your primary and secondary Amazon Regions. For example, suppose that you have applications or client systems that are running in the same VPC as the primary cluster. If the secondary cluster is promoted, the global writer endpoint automatically changes to point to that cluster. Although the global writer endpoint lets you avoid changing the connection settings for your application, your applications can't access the IP addresses in the newly promoted primary Amazon Region's VPC until you set up networking between the two VPCs. See Amazon VPC-to-Amazon VPC connectivity options to evaluate different options for setting up this connectivity.
- The global writer endpoint update after a global database failover or switchover can take a long time depending upon your Domain Name Service (DNS) caching duration. See Amazon Aurora MySQL Database Administrator's Handbook to learn more. Aurora Global Database emits an RDS Event when it sees the DNS change on the global writer endpoint. You can use the event to devise strategies to ensure the DNS cache doesn't extend beyond the time after the event is generated. For more information, see DB cluster events.
- Aurora Global Database replicates data asynchronously. The cross-Region failover methods can result in some write transaction data that wasn't replicated to the chosen secondary before the failover initiated. Although Aurora attempts on best-effort basis to block writes in the original primary Amazon Region, failover can be susceptible to split-brain issues. The considerations to minimize data loss and split-brain risk apply to Aurora Global Database writer endpoints as well. For more information, see Performing managed failovers for Aurora global databases.

Using write forwarding in an Amazon Aurora global database

You can reduce the number of endpoints that you need to manage for applications running on your Aurora global database, by using *write forwarding*. With write forwarding enabled, secondary

clusters in an Aurora global database forward SQL statements that perform write operations to the primary cluster. The primary cluster updates the source and then propagates resulting changes back to all secondary Amazon Regions.

The write forwarding configuration saves you from implementing your own mechanism to send write operations from a secondary Amazon Region to the primary Region. Aurora handles the cross-Region networking setup. Aurora also transmits all necessary session and transactional context for each statement. The data is always changed first on the primary cluster and then replicated to the secondary clusters in the Aurora global database. This way, the primary cluster is the source of truth and always has an up-to-date copy of all your data.

Topics

- Using write forwarding in an Aurora MySQL global database
- Using write forwarding in an Aurora PostgreSQL global database

Using write forwarding in an Aurora MySQL global database

Topics

- Region and version availability of write forwarding in Aurora MySQL
- Enabling write forwarding in Aurora MySQL
- Checking if a secondary cluster has write forwarding enabled in Aurora MySQL
- Application and SQL compatibility with write forwarding in Aurora MySQL
- Isolation and consistency for write forwarding in Aurora MySQL
- Running multipart statements with write forwarding in Aurora MySQL
- Transactions with write forwarding in Aurora MySQL
- Configuration parameters for write forwarding in Aurora MySQL
- Amazon CloudWatch metrics for write forwarding in Aurora MySQL
- Aurora MySQL status variables for write forwarding

Region and version availability of write forwarding in Aurora MySQL

Write forwarding is supported with Aurora MySQL 2.08.1 and higher versions, in every Region where Aurora MySQL-based global databases are available.

For information on version and Region availability of Aurora MySQL global databases, see Aurora global databases with Aurora MySQL.

Enabling write forwarding in Aurora MySQL

By default, write forwarding isn't enabled when you add a secondary cluster to an Aurora global database.

To enable write forwarding using the Amazon Web Services Management Console, select the **Turn on global write forwarding** check box under **Read replica write forwarding** when you add a Region for a global database. For an existing secondary cluster, modify the cluster to **Turn on global write forwarding**. To turn off write forwarding, clear the **Turn on global write forwarding** check box when adding the Region or modifying the secondary cluster.

To enable write forwarding using the Amazon CLI, use the `--enable-global-write-forwarding` option. This option works when you create a new secondary cluster using the `create-db-cluster` command. It also works when you modify an existing secondary cluster using the `modify-db-cluster` command. It requires that the global database uses an Aurora version that supports write forwarding. You can turn write forwarding off by using the `--no-enable-global-write-forwarding` option with these same CLI commands.

To enable write forwarding using the Amazon RDS API, set the `EnableGlobalWriteForwarding` parameter to `true`. This parameter works when you create a new secondary cluster using the `CreateDBCluster` operation. It also works when you modify an existing secondary cluster using the `ModifyDBCluster` operation. It requires that the global database uses an Aurora version that supports write forwarding. You can turn write forwarding off by setting the `EnableGlobalWriteForwarding` parameter to `false`.

> **Note**
>
> For a database session to use write forwarding, specify a setting for the `aurora_replica_read_consistency` configuration parameter. Do this in every session that uses the write forwarding feature. For information about this parameter, see Isolation and consistency for write forwarding in Aurora MySQL.
> The RDS Proxy feature doesn't support the `SESSION` value for the `aurora_replica_read_consistency` variable. Setting this value can cause unexpected behavior.

The following CLI examples show how you can set up an Aurora global database with write forwarding enabled or disabled. The highlighted items represent the commands and options that are important to specify and keep consistent when setting up the infrastructure for an Aurora global database.

The following example creates an Aurora global database, a primary cluster, and a secondary cluster with write forwarding enabled. Substitute your own choices for the user name, password, and primary and secondary Amazon Regions.

```
# Create overall global database.
aws rds create-global-cluster --global-cluster-identifier write-forwarding-test \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --region us-east-1

# Create primary cluster, in the same Amazon Region as the global database.
aws rds create-db-cluster --global-cluster-identifier write-forwarding-test \
  --db-cluster-identifier write-forwarding-test-cluster-1 \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --master-username user_name --master-user-password password \
  --region us-east-1

aws rds create-db-instance --db-cluster-identifier write-forwarding-test-cluster-1 \
  --db-instance-identifier write-forwarding-test-cluster-1-instance-1 \
  --db-instance-class db.r5.large \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --region us-east-1

aws rds create-db-instance --db-cluster-identifier write-forwarding-test-cluster-1 \
  --db-instance-identifier write-forwarding-test-cluster-1-instance-2 \
  --db-instance-class db.r5.large \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --region us-east-1

# Create secondary cluster, in a different Amazon Region than the global database,
# with write forwarding enabled.
aws rds create-db-cluster --global-cluster-identifier write-forwarding-test \
  --db-cluster-identifier write-forwarding-test-cluster-2 \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --region us-east-2 \
  --enable-global-write-forwarding

aws rds create-db-instance --db-cluster-identifier write-forwarding-test-cluster-2 \
  --db-instance-identifier write-forwarding-test-cluster-2-instance-1 \
```

```
  --db-instance-class db.r5.large \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --region us-east-2

aws rds create-db-instance --db-cluster-identifier write-forwarding-test-cluster-2 \
  --db-instance-identifier write-forwarding-test-cluster-2-instance-2 \
  --db-instance-class db.r5.large \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --region us-east-2
```

The following example continues from the previous one. It creates a secondary cluster without write forwarding enabled, then enables write forwarding. After this example finishes, all secondary clusters in the global database have write forwarding enabled.

```
# Create secondary cluster, in a different Amazon Region than the global database,
# without write forwarding enabled.
aws rds create-db-cluster --global-cluster-identifier write-forwarding-test \
  --db-cluster-identifier write-forwarding-test-cluster-2 \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --region us-west-1

aws rds create-db-instance --db-cluster-identifier write-forwarding-test-cluster-2 \
  --db-instance-identifier write-forwarding-test-cluster-2-instance-1 \
  --db-instance-class db.r5.large \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --region us-west-1

aws rds create-db-instance --db-cluster-identifier write-forwarding-test-cluster-2 \
  --db-instance-identifier write-forwarding-test-cluster-2-instance-2 \
  --db-instance-class db.r5.large \
  --engine aurora-mysql --engine-version 5.7.mysql_aurora.2.11.1 \
  --region us-west-1

aws rds modify-db-cluster --db-cluster-identifier write-forwarding-test-cluster-2 \
  --region us-east-2 \
  --enable-global-write-forwarding
```

Checking if a secondary cluster has write forwarding enabled in Aurora MySQL

To determine whether you can use write forwarding from a secondary cluster, you can check whether the cluster has the attribute `"GlobalWriteForwardingStatus": "enabled"`.

In the Amazon Web Services Management Console, on the **Configuration** tab of the details page for the cluster, you see the status **Enabled** for **Global read replica write forwarding**.

To see the status of the global write forwarding setting for all of your clusters, run the following Amazon CLI command.

A secondary cluster shows the value `"enabled"` or `"disabled"` to indicate if write forwarding is turned on or off. A value of `null` indicates that write forwarding isn't available for that cluster. Either the cluster isn't part of a global database, or is the primary cluster instead of a secondary cluster. The value can also be `"enabling"` or `"disabling"` if write forwarding is in the process of being turned on or off.

Example

```
aws rds describe-db-clusters \
--query '*[].
{DBClusterIdentifier:DBClusterIdentifier,GlobalWriteForwardingStatus:GlobalWriteForwardingStatu

[
    {
        "GlobalWriteForwardingStatus": "enabled",
        "DBClusterIdentifier": "aurora-write-forwarding-test-replica-1"
    },
    {
        "GlobalWriteForwardingStatus": "disabled",
        "DBClusterIdentifier": "aurora-write-forwarding-test-replica-2"
    },
    {
        "GlobalWriteForwardingStatus": null,
        "DBClusterIdentifier": "non-global-cluster"
    }
]
```

To find all secondary clusters that have global write forwarding enabled, run the following command. This command also returns the cluster's reader endpoint. You use the secondary cluster's reader endpoint when you use write forwarding from the secondary to the primary in your Aurora global database.

Example

```
aws rds describe-db-clusters --query 'DBClusters[].
{DBClusterIdentifier:DBClusterIdentifier,GlobalWriteForwardingStatus:GlobalWriteForwardingStatu
 | [?GlobalWriteForwardingStatus == `enabled`]'
[
    {
        "GlobalWriteForwardingStatus": "enabled",
        "ReaderEndpoint": "aurora-write-forwarding-test-replica-1.cluster-ro-
cnpexample.us-west-2.rds.amazonaws.com",
        "DBClusterIdentifier": "aurora-write-forwarding-test-replica-1"
    }
]
```

Application and SQL compatibility with write forwarding in Aurora MySQL

You can use the following kinds of SQL statements with write forwarding:

- Data manipulation language (DML) statements, such as `INSERT`, `DELETE`, and `UPDATE`. There are some restrictions on the properties of these statements that you can use with write forwarding, as described following.
- `SELECT ... LOCK IN SHARE MODE` and `SELECT FOR UPDATE` statements.
- `PREPARE` and `EXECUTE` statements.

Certain statements aren't allowed or can produce stale results when you use them in a global database with write forwarding. Thus, the `EnableGlobalWriteForwarding` setting is turned off by default for secondary clusters. Before turning it on, check to make sure that your application code isn't affected by any of these restrictions.

The following restrictions apply to the SQL statements you use with write forwarding. In some cases, you can use the statements on secondary clusters with write forwarding enabled at the cluster level. This approach works if write forwarding isn't turned on within the session by the `aurora_replica_read_consistency` configuration parameter. Trying to use a statement when it's not allowed because of write forwarding causes an error message with the following format.

```
ERROR 1235 (42000): This version of MySQL doesn't yet support 'operation with write
 forwarding'.
```

Data definition language (DDL)

Connect to the primary cluster to run DDL statements. You can't run them from reader DB instances.

Updating a permanent table using data from a temporary table

You can use temporary tables on secondary clusters with write forwarding enabled. However, you can't use a DML statement to modify a permanent table if the statement refers to a temporary table. For example, you can't use an `INSERT ... SELECT` statement that takes the data from a temporary table. The temporary table exists on the secondary cluster and isn't available when the statement runs on the primary cluster.

XA transactions

You can't use the following statements on a secondary cluster when write forwarding is turned on within the session. You can use these statements on secondary clusters that don't have write forwarding enabled, or within sessions where the `aurora_replica_read_consistency` setting is empty. Before turning on write forwarding within a session, check if your code uses these statements.

```
XA {START|BEGIN} xid [JOIN|RESUME]
XA END xid [SUSPEND [FOR MIGRATE]]
XA PREPARE xid
XA COMMIT xid [ONE PHASE]
XA ROLLBACK xid
XA RECOVER [CONVERT XID]
```

LOAD statements for permanent tables

You can't use the following statements on a secondary cluster with write forwarding enabled.

```
LOAD DATA INFILE 'data.txt' INTO TABLE t1;
        LOAD XML LOCAL INFILE 'test.xml' INTO TABLE t1;
```

You can load data into a temporary table on a secondary cluster. However, make sure that you run any `LOAD` statements that refer to permanent tables only on the primary cluster.

Plugin statements

You can't use the following statements on a secondary cluster with write forwarding enabled.

```
INSTALL PLUGIN example SONAME 'ha_example.so';
UNINSTALL PLUGIN example;
```

SAVEPOINT statements

You can't use the following statements on a secondary cluster when write forwarding is turned on within the session. You can use these statements on secondary clusters that don't have write forwarding enabled, or within sessions where the `aurora_replica_read_consistency` setting is blank. Check if your code uses these statements before turning on write forwarding within a session.

```
SAVEPOINT t1_save;
ROLLBACK TO SAVEPOINT t1_save;
RELEASE SAVEPOINT t1_save;
```

Isolation and consistency for write forwarding in Aurora MySQL

In sessions that use write forwarding, you can only use the `REPEATABLE READ` isolation level. Although you can also use the `READ COMMITTED` isolation level with read-only clusters in secondary Amazon Regions, that isolation level doesn't work with write forwarding. For information about the `REPEATABLE READ` and `READ COMMITTED` isolation levels, see Aurora MySQL isolation levels.

You can control the degree of read consistency on a secondary cluster. The read consistency level determines how much waiting the secondary cluster does before each read operation to ensure that some or all changes are replicated from the primary cluster. You can adjust the read consistency level to ensure that all forwarded write operations from your session are visible in the secondary cluster before any subsequent queries. You can also use this setting to ensure that queries on the secondary cluster always see the most current updates from the primary cluster. This is so even for those submitted by other sessions or other clusters. To specify this type of behavior for your application, you choose a value for the session-level parameter `aurora_replica_read_consistency`.

> **Important**
>
> Always set the `aurora_replica_read_consistency` parameter for any session for which you want to forward writes. If you don't, Aurora doesn't enable write forwarding for

that session. This parameter has an empty value by default, so choose a specific value when you use this parameter. The `aurora_replica_read_consistency` parameter has an effect only on secondary clusters that have write forwarding enabled.
For Aurora MySQL version 2 and version 3 lower than 3.04, use `aurora_replica_read_consistency` as a session variable. For Aurora MySQL version 3.04 and higher, you can use `aurora_replica_read_consistency` as either a session variable or as a DB cluster parameter.

For the `aurora_replica_read_consistency` parameter, you can specify the values `EVENTUAL`, `SESSION`, and `GLOBAL`.

As you increase the consistency level, your application spends more time waiting for changes to be propagated between Amazon Regions. You can choose the balance between fast response time and ensuring that changes made in other locations are fully available before your queries run.

With the read consistency set to `EVENTUAL`, queries in a secondary Amazon Region that uses write forwarding might see data that is slightly stale due to replication lag. Results of write operations in the same session aren't visible until the write operation is performed on the primary Region and replicated to the current Region. The query doesn't wait for the updated results to be available. Thus, it might retrieve the older data or the updated data, depending on the timing of the statements and the amount of replication lag.

With the read consistency set to `SESSION`, all queries in a secondary Amazon Region that uses write forwarding see the results of all changes made in that session. The changes are visible regardless of whether the transaction is committed. If necessary, the query waits for the results of forwarded write operations to be replicated to the current Region. It doesn't wait for updated results from write operations performed in other Regions or in other sessions within the current Region.

With the read consistency set to `GLOBAL`, a session in a secondary Amazon Region sees changes made by that session. It also sees all committed changes from both the primary Amazon Region and other secondary Amazon Regions. Each query might wait for a period that varies depending on the amount of session lag. The query proceeds when the secondary cluster is up-to-date with all committed data from the primary cluster, as of the time that the query began.

For more information about all the parameters involved with write forwarding, see Configuration parameters for write forwarding in Aurora MySQL.

Examples of using write forwarding

These examples use `aurora_replica_read_consistency` as a session variable. For Aurora MySQL version 3.04 and higher, you can use `aurora_replica_read_consistency` as either a session variable or as a DB cluster parameter.

In the following example, the primary cluster is in the US East (N. Virginia) Region. The secondary cluster is in the US East (Ohio) Region. The example shows the effects of running `INSERT` statements followed by `SELECT` statements. Depending on the value of the `aurora_replica_read_consistency` setting, the results might differ depending on the timing of the statements. To achieve higher consistency, you might wait briefly before issuing the `SELECT` statement. Or Aurora can automatically wait until the results finish replicating before proceeding with `SELECT`.

In this example, there is a read consistency setting of `eventual`. Running an `INSERT` statement immediately followed by a `SELECT` statement still returns the value of `COUNT(*)`. This value reflects the number of rows before the new row is inserted. Running the `SELECT` again a short time later returns the updated row count. The `SELECT` statements don't wait.

```
mysql> set aurora_replica_read_consistency = 'eventual';
mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        5 |
+----------+
1 row in set (0.00 sec)
mysql> insert into t1 values (6); select count(*) from t1;
+----------+
| count(*) |
+----------+
|        5 |
+----------+
1 row in set (0.00 sec)
mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        6 |
+----------+
1 row in set (0.00 sec)
```

With a read consistency setting of `session`, a `SELECT` statement immediately after an `INSERT` waits until the changes from the `INSERT` statement are visible. Subsequent `SELECT` statements don't wait.

```
mysql> set aurora_replica_read_consistency = 'session';
mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        6 |
+----------+
1 row in set (0.01 sec)
mysql> insert into t1 values (6); select count(*) from t1; select count(*) from t1;
Query OK, 1 row affected (0.08 sec)
+----------+
| count(*) |
+----------+
|        7 |
+----------+
1 row in set (0.37 sec)
+----------+
| count(*) |
+----------+
|        7 |
+----------+
1 row in set (0.00 sec)
```

With the read consistency setting still set to `session`, introducing a brief wait after performing an `INSERT` statement makes the updated row count available by the time the next `SELECT` statement runs.

```
mysql> insert into t1 values (6); select sleep(2); select count(*) from t1;
Query OK, 1 row affected (0.07 sec)
+----------+
| sleep(2) |
+----------+
|        0 |
+----------+
1 row in set (2.01 sec)
+----------+
| count(*) |
+----------+
```

```
|        8 |
+----------+
1 row in set (0.00 sec)
```

With a read consistency setting of `global`, each `SELECT` statement waits to ensure that all data changes as of the start time of the statement are visible before performing the query. The amount of waiting for each `SELECT` statement varies, depending on the amount of replication lag between the primary and secondary clusters.

```
mysql> set aurora_replica_read_consistency = 'global';
mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        8 |
+----------+
1 row in set (0.75 sec)
mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        8 |
+----------+
1 row in set (0.37 sec)
mysql> select count(*) from t1;
+----------+
| count(*) |
+----------+
|        8 |
+----------+
1 row in set (0.66 sec)
```

Running multipart statements with write forwarding in Aurora MySQL

A DML statement might consist of multiple parts, such as a `INSERT ... SELECT` statement or a `DELETE ... WHERE` statement. In this case, the entire statement is forwarded to the primary cluster and run there.

Transactions with write forwarding in Aurora MySQL

Whether the transaction is forwarded to the primary cluster depends on the access mode of the transaction. You can specify the access mode for the transaction by using the `SET TRANSACTION`

statement or the `START TRANSACTION` statement. You can also specify the transaction access mode by changing the value of the transaction_read_only session variable. You can change this session value only while you're connected to a DB cluster that has write forwarding enabled.

If a long-running transaction doesn't issue any statement for a substantial period of time, it might exceed the idle timeout period. This period has a default of one minute. You can increase it up to one day. A transaction that exceeds the idle timeout is canceled by the primary cluster. The next subsequent statement you submit receives a timeout error. Then Aurora rolls back the transaction.

This type of error can occur in other cases when write forwarding becomes unavailable. For example, Aurora cancels any transactions that use write forwarding if you restart the primary cluster or if you turn off the write forwarding configuration setting.

Configuration parameters for write forwarding in Aurora MySQL

The Aurora cluster parameter groups include settings for the write forwarding feature. Because these are cluster parameters, all DB instances in each cluster have the same values for these variables. Details about these parameters are summarized in the following table, with usage notes after the table.

Name	Scope	Type	Default value	Valid values
`aurora_fwd_master_idle_timeout` (Aurora MySQL version 2)	Global	unsigned integer	60	1–86,400
`aurora_fwd_master_max_connections_pct` (Aurora MySQL version 2)	Global	unsigned long integer	10	0–90
`aurora_fwd_writer_idle_timeout` (Aurora MySQL version 3)	Global	unsigned integer	60	1–86,400
`aurora_fwd_writer_max_connections_pct` (Aurora MySQL version 3)	Global	unsigned long integer	10	0–90

Name	Scope	Type	Default value	Valid values
aurora_replica_read_consistency	Session for version 2 and version 3 lower than 3.04, Global for version 3.04 and higher	Enum	'' (null)	EVENTUAL, SESSION, GLOBAL

To control incoming write requests from secondary clusters, use these settings on the primary cluster:

- aurora_fwd_master_idle_timeout, aurora_fwd_writer_idle_timeout: The number of seconds the primary cluster waits for activity on a connection that's forwarded from a secondary cluster before closing it. If the session remains idle beyond this period, Aurora cancels the session.
- aurora_fwd_master_max_connections_pct, aurora_fwd_writer_max_connections_pct: The upper limit on database connections that can be used on a writer DB instance to handle queries forwarded from readers. It's expressed as a percentage of the max_connections setting for the writer DB instance in the primary cluster. For example, if max_connections is 800 and aurora_fwd_master_max_connections_pct or aurora_fwd_writer_max_connections_pct is 10, then the writer allows a maximum of 80 simultaneous forwarded sessions. These connections come from the same connection pool managed by the max_connections setting.

  This setting applies only on the primary cluster, when one or more secondary clusters have write forwarding enabled. If you decrease the value, existing connections aren't affected. Aurora takes the new value of the setting into account when attempting to create a new connection from a secondary cluster. The default value is 10, representing 10% of the max_connections value. If you enable query forwarding on any of the secondary clusters, this setting must have a nonzero value for write operations from secondary clusters to succeed. If the value is zero, the

write operations receive the error code `ER_CON_COUNT_ERROR` with the message `Not enough connections on writer to handle your request`.

The `aurora_replica_read_consistency` parameter enables write forwarding. You use it in each session. You can specify `EVENTUAL`, `SESSION`, or `GLOBAL` for read consistency level. To learn more about consistency levels, see Isolation and consistency for write forwarding in Aurora MySQL. The following rules apply to this parameter:

- The default value is '' (empty).
- Write forwarding is available in a session only if `aurora_replica_read_consistency` is set to `EVENTUAL` or `SESSION` or `GLOBAL`. This parameter is relevant only in reader instances of secondary clusters that have write forwarding enabled and that are in an Aurora global database.
- You can't set this variable (when empty) or unset (when already set) inside a multistatement transaction. However, you can change it from one valid value (`EVENTUAL`, `SESSION`, or `GLOBAL`) to another valid value (`EVENTUAL`, `SESSION`, or `GLOBAL`) during such a transaction.
- The variable can't be `SET` when write forwarding isn't enabled on the secondary cluster.

Amazon CloudWatch metrics for write forwarding in Aurora MySQL

The following Amazon CloudWatch metrics apply to the primary cluster when you use write forwarding on one or more secondary clusters. These metrics are all measured on the writer DB instance in the primary cluster.

CloudWatch metric	Unit	Description
`AuroraDMLRejectedMasterFull`	Count	The number of forwarded queries that are rejected because the session is full on the writer DB instance. For Aurora MySQL version 2.
`AuroraDMLRejectedWriterFull`	Count	The number of forwarded queries that are rejected because the session is full on the writer DB instance.

CloudWatch metric	Unit	Description
		For Aurora MySQL version 3.
ForwardingMasterDMLLatency	Milliseconds	Average time to process each forwarded DML statement on the writer DB instance. It doesn't include the time for the secondary cluster to forward the write request, or the time to replicate changes back to the secondary cluster. For Aurora MySQL version 2.
ForwardingMasterDMLThroughput	Count per second	Number of forwarded DML statements processed each second by this writer DB instance. For Aurora MySQL version 2.
ForwardingMasterOpenSessions	Count	Number of forwarded sessions on the writer DB instance. For Aurora MySQL version 2.
ForwardingWriterDMLLatency	Milliseconds	Average time to process each forwarded DML statement on the writer DB instance. It doesn't include the time for the secondary cluster to forward the write request, or the time to replicate changes back to the secondary cluster. For Aurora MySQL version 3.

CloudWatch metric	Unit	Description
`ForwardingWriterDMLThroughput`	Count per second	Number of forwarded DML statements processed each second by this writer DB instance. For Aurora MySQL version 3.
`ForwardingWriterOpenSessions`	Count	Number of forwarded sessions on the writer DB instance. For Aurora MySQL version 3.

The following CloudWatch metrics apply to each secondary cluster. These metrics are measured on each reader DB instance in a secondary cluster with write forwarding enabled.

CloudWatch metric	Unit	Description
`ForwardingReplicaDMLLatency`	Milliseconds	Average response time of forwarded DMLs on the replica.
`ForwardingReplicaDMLThroughput`	Count per second	Number of forwarded DML statements processed each second.
`ForwardingReplicaOpenSessions`	Count	Number of sessions that are using write forwarding on a reader DB instance.
`ForwardingReplicaReadWaitLatency`	Milliseconds	Average wait time that a `SELECT` statement on a reader DB instance waits to catch up to the primary cluster.

CloudWatch metric	Unit	Description
		The degree to which the reader DB instance waits before processing a query depends on the `aurora_replica_read_consistency` setting.
`ForwardingReplicaReadWaitThroughput`	Count per second	Total number of `SELECT` statements processed each second in all sessions that are forwarding writes.
`ForwardingReplicaSelectLatency`	Milliseconds	Forwarded `SELECT` latency, average over all forwarded `SELECT` statements within the monitoring period.
`ForwardingReplicaSelectThroughput`	Count per second	Forwarded `SELECT` throughput per second average within the monitoring period.

Aurora MySQL status variables for write forwarding

The following Aurora MySQL status variables apply to the primary cluster when you use write forwarding on one or more secondary clusters. These metrics are all measured on the writer DB instance in the primary cluster.

Aurora MySQL status variable	Unit	Description
`Aurora_fwd_master_dml_stmt_count`	Count	Total number of DML statements forwarded to this writer DB instance. For Aurora MySQL version 2.

Aurora MySQL status variable	Unit	Description
`Aurora_fwd_master_dml_stmt_duration`	Microseconds	Total duration of DML statements forwarded to this writer DB instance. For Aurora MySQL version 2.
`Aurora_fwd_master_open_sessions`	Count	Number of forwarded sessions on the writer DB instance. For Aurora MySQL version 2.
`Aurora_fwd_master_select_stmt_count`	Count	Total number of `SELECT` statements forwarded to this writer DB instance. For Aurora MySQL version 2.
`Aurora_fwd_master_select_stmt_duration`	Microseconds	Total duration of `SELECT` statements forwarded to this writer DB instance. For Aurora MySQL version 2.
`Aurora_fwd_writer_dml_stmt_count`	Count	Total number of DML statements forwarded to this writer DB instance. For Aurora MySQL version 3.
`Aurora_fwd_writer_dml_stmt_duration`	Microseconds	Total duration of DML statements forwarded to this writer DB instance.

Aurora MySQL status variable	Unit	Description
`Aurora_fwd_writer_open_sessions`	Count	Number of forwarded sessions on the writer DB instance. For Aurora MySQL version 3.
`Aurora_fwd_writer_select_stmt_count`	Count	Total number of `SELECT` statements forwarded to this writer DB instance. For Aurora MySQL version 3.
`Aurora_fwd_writer_select_stmt_duration`	Microseconds	Total duration of `SELECT` statements forwarded to this writer DB instance. For Aurora MySQL version 3.

The following Aurora MySQL status variables apply to each secondary cluster. These metrics are measured on each reader DB instance in a secondary cluster with write forwarding enabled.

Aurora MySQL status variable	Unit	Description
`Aurora_fwd_replica_dml_stmt_count`	Count	Total number of DML statements forwarded from this reader DB instance.
`Aurora_fwd_replica_dml_stmt_duration`	Microseconds	Total duration of all DML statements forwarded from this reader DB instance.
`Aurora_fwd_replica_errors_session_limit`	Count	Number of sessions rejected by the primary cluster due to one of the following error conditions:

Aurora MySQL status variable	Unit	Description
		• writer full • Too many forwarded statements in progress.
`Aurora_fwd_replica_open_sessions`	Count	Number of sessions that are using write forwarding on a reader DB instance.
`Aurora_fwd_replica_read_wait_count`	Count	Total number of read-after-write waits on this reader DB instance.
`Aurora_fwd_replica_read_wait_duration`	Microseconds	Total duration of waits due to the read consistency setting on this reader DB instance.
`Aurora_fwd_replica_select_stmt_count`	Count	Total number of `SELECT` statements forwarded from this reader DB instance.
`Aurora_fwd_replica_select_stmt_duration`	Microseconds	Total duration of `SELECT` statements forwarded from this reader DB instance.

Using write forwarding in an Aurora PostgreSQL global database

Topics

- Region and version availability of write forwarding in Aurora PostgreSQL
- Enabling write forwarding in Aurora PostgreSQL
- Checking if a secondary cluster has write forwarding enabled in Aurora PostgreSQL
- Application and SQL compatibility with write forwarding in Aurora PostgreSQL
- Isolation and consistency for write forwarding in Aurora PostgreSQL
- Transaction access modes with write forwarding

- Running multipart statements with write forwarding in Aurora PostgreSQL
- Configuration parameters for write forwarding in Aurora PostgreSQL
- Amazon CloudWatch metrics for write forwarding in Aurora PostgreSQL
- Wait events for write forwarding in Aurora PostgreSQL

Region and version availability of write forwarding in Aurora PostgreSQL

In Aurora PostgreSQL version 16 and higher major versions, global write forwarding is supported in all minor versions. For earlier Aurora PostgreSQL versions, global write forwarding is supported with version 15.4 and higher minor versions, and version 14.9 and higher minor versions. Write forwarding is available in every Amazon Region where Aurora PostgreSQL-based global databases are available.

For more information on version and Region availability of Aurora PostgreSQL global databases, see Aurora global databases with Aurora PostgreSQL.

Enabling write forwarding in Aurora PostgreSQL

By default, write forwarding isn't enabled when you add a secondary cluster to an Aurora global database. You can enable write forwarding for your secondary DB cluster while you're creating it or anytime after you create it. If needed, you can disable it later. Enabling or disabling write forwarding doesn't cause downtime or a reboot.

> **Note**
>
> You can use local write forwarding for your applications that have occasional writes and require read-after-write consistency, which is the ability to read the latest write in a transaction.

Console


In the console, you can enable or disable write forwarding when you create or modify a secondary DB cluster.

Enabling or disabling write forwarding when creating a secondary DB cluster

When you create a new secondary DB cluster, you enable write forwarding by selecting the **Turn on global write forwarding** check box under **Read replica write forwarding**. Or clear the check box to

disable it. To create a secondary DB cluster, follow the instructions for your DB engine in Creating an Amazon Aurora DB cluster.

The following screenshot shows the **Read replica write forwarding** section with the **Turn on global write forwarding** check box selected.

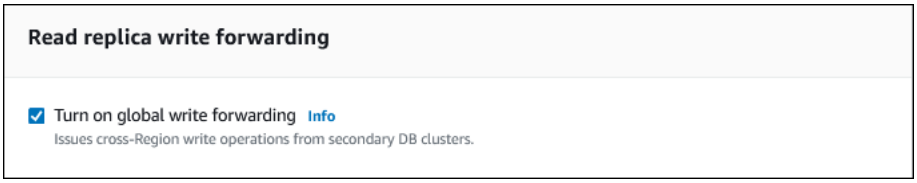

Enabling or disabling write forwarding when modifying a secondary DB cluster

In the console, you can modify a secondary DB cluster to enable or disable write forwarding.

To enable or disable write forwarding for a secondary DB cluster by using the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases**.
3. Choose the secondary DB cluster, and choose **Modify**.
4. In the **Read replica write forwarding** section, check or clear the **Turn on global write forwarding** check box.
5. Choose **Continue**.
6. For **Schedule modifications**, choose **Apply immediately**. If you choose **Apply during the next scheduled maintenance window**, Aurora ignores this setting and turns on write forwarding immediately.
7. Choose **Modify cluster**.

Amazon CLI

To enable write forwarding by using the Amazon CLI, use the `--enable-global-write-forwarding` option. This option works when you create a new secondary cluster using the create-db-cluster command. It also works when you modify an existing secondary cluster using the modify-db-cluster command. It requires that the global database uses an Aurora version that supports write forwarding. You can disable write forwarding by using the `--no-enable-global-write-forwarding` option with these same CLI commands.

The following procedures describe how to enable or disable write forwarding for a secondary DB cluster in your global cluster by using the Amazon CLI.

To enable or disable write forwarding for an existing secondary DB cluster

- Call the modify-db-cluster Amazon CLI command and supply the following values:
  - `--db-cluster-identifier` – The name of the DB cluster.
  - `--enable-global-write-forwarding` to turn on or `--no-enable-global-write-forwarding` to turn off.

  The following example enables write forwarding for DB cluster `sample-secondary-db-cluster`.

  For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
    --db-cluster-identifier sample-secondary-db-cluster \
    --enable-global-write-forwarding
```

  For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier sample-secondary-db-cluster ^
    --enable-global-write-forwarding
```

RDS API

To enable write forwarding using the Amazon RDS API, set the `EnableGlobalWriteForwarding` parameter to `true`. This parameter works when you create a new secondary cluster using the CreateDBCluster operation. It also works when you modify an existing secondary cluster using the ModifyDBCluster operation. It requires that the global database uses an Aurora version that supports write forwarding. You can disable write forwarding by setting the `EnableGlobalWriteForwarding` parameter to `false`.

Checking if a secondary cluster has write forwarding enabled in Aurora PostgreSQL

To determine whether you can use write forwarding from a secondary cluster, you can check whether the cluster has the attribute `"GlobalWriteForwardingStatus": "enabled"`.

In the Amazon Web Services Management Console, you see `Read replica write forwarding` on the **Configuration** tab of the details page for the cluster. To see the status of the global write forwarding setting for all of your clusters, run the following Amazon CLI command.

A secondary cluster shows the value `"enabled"` or `"disabled"` to indicate if write forwarding is turned on or off. A value of `null` indicates that write forwarding isn't available for that cluster. Either the cluster isn't part of a global database, or is the primary cluster instead of a secondary cluster. The value can also be `"enabling"` or `"disabling"` if write forwarding is in the process of being turned on or off.

Example

```
aws rds describe-db-clusters --query '*[].
{DBClusterIdentifier:DBClusterIdentifier,GlobalWriteForwardingStatus:GlobalWriteForwardingStatu
[
    {
        "GlobalWriteForwardingStatus": "enabled",
        "DBClusterIdentifier": "aurora-write-forwarding-test-replica-1"
    },
    {
        "GlobalWriteForwardingStatus": "disabled",
        "DBClusterIdentifier": "aurora-write-forwarding-test-replica-2"
    },
    {
        "GlobalWriteForwardingStatus": null,
        "DBClusterIdentifier": "non-global-cluster"
    }
]
```

To find all secondary clusters that have global write forwarding enabled, run the following command. This command also returns the cluster's reader endpoint. You use the secondary cluster's reader endpoint when you use write forwarding from the secondary to the primary in your Aurora global database.

Example

```
aws rds describe-db-clusters --query 'DBClusters[].
{DBClusterIdentifier:DBClusterIdentifier,GlobalWriteForwardingStatus:GlobalWriteForwardingStatu
 | [?GlobalWriteForwardingStatus == `enabled`]'
[
    {
        "GlobalWriteForwardingStatus": "enabled",
        "ReaderEndpoint": "aurora-write-forwarding-test-replica-1.cluster-ro-
cnpexample.us-west-2.rds.amazonaws.com",
        "DBClusterIdentifier": "aurora-write-forwarding-test-replica-1"
    }
]
```

Application and SQL compatibility with write forwarding in Aurora PostgreSQL

Certain statements aren't allowed or can produce stale results when you use them in a global database with write forwarding. In addition, user defined functions and user defined procedures aren't supported. Thus, the `EnableGlobalWriteForwarding` setting is turned off by default for secondary clusters. Before turning it on, check to make sure that your application code isn't affected by any of these restrictions.

You can use the following kinds of SQL statements with write forwarding:

- Data manipulation language (DML) statements, such as `INSERT`, `DELETE`, and `UPDATE`
- `SELECT FOR { UPDATE | NO KEY UPDATE | SHARE | KEY SHARE }` statements
- `PREPARE` and `EXECUTE` statements
- `EXPLAIN` statements with the statements in this list

The following kinds of SQL statements aren't supported with write forwarding:

- Data definition language (DDL) statements
- `ANALYZE`
- `CLUSTER`
- `COPY`
- Cursors – Cursors aren't supported, so make sure to close them before using write forwarding.
- `GRANT|REVOKE|REASSIGN OWNED|SECURITY LABEL`
- `LOCK`

- SAVEPOINT statements
- SELECT INTO
- SET CONSTRAINTS
- Sequence updates: nextval(), setval()
- TRUNCATE
- VACUUM

Isolation and consistency for write forwarding in Aurora PostgreSQL

In sessions that use write forwarding, you can use the REPEATABLE READ and READ COMMITTED isolation levels. However, the SERIALIZABLE isolation level isn't supported.

You can control the degree of read consistency on a secondary cluster. The read consistency level determines how much waiting the secondary cluster does before each read operation to ensure that some or all changes are replicated from the primary cluster. You can adjust the read consistency level to ensure that all forwarded write operations from your session are visible in the secondary cluster before any subsequent queries. You can also use this setting to ensure that queries on the secondary cluster always see the most current updates from the primary cluster. This is so even for those submitted by other sessions or other clusters. To specify this type of behavior for your application, you choose the appropriate value for the apg_write_forward.consistency_mode parameter. The apg_write_forward.consistency_mode parameter has an effect only on secondary clusters that have write forwarding enabled.

> **Note**
>
> For the apg_write_forward.consistency_mode parameter, you can specify the value SESSION, EVENTUAL, GLOBAL, or OFF. By default, the value is set to SESSION. Setting the value to OFF disables write forwarding in the session.

As you increase the consistency level, your application spends more time waiting for changes to be propagated between Amazon Regions. You can choose the balance between fast response time and ensuring that changes made in other locations are fully available before your queries run.

With each available consistency mode setting, the effect is as follows:

- `SESSION` – All queries in a secondary Amazon Region that uses write forwarding see the results of all changes made in that session. The changes are visible regardless of whether the transaction is committed. If necessary, the query waits for the results of forwarded write operations to be replicated to the current Region. It doesn't wait for updated results from write operations performed in other Regions or in other sessions within the current Region.
- `EVENTUAL` – Queries in a secondary Amazon Region that uses write forwarding might see data that is slightly stale due to replication lag. Results of write operations in the same session aren't visible until the write operation is performed on the primary Region and replicated to the current Region. The query doesn't wait for the updated results to be available. Thus, it might retrieve the older data or the updated data, depending on the timing of the statements and the amount of replication lag.
- `GLOBAL` – A session in a secondary Amazon Region sees changes made by that session. It also sees all committed changes from both the primary Amazon Region and other secondary Amazon Regions. Each query might wait for a period that varies depending on the amount of session lag. The query proceeds when the secondary cluster is up-to-date with all committed data from the primary cluster, as of the time that the query began.
- `OFF` – Write forwarding is disabled in the session.

For more information about all the parameters involved with write forwarding, see Configuration parameters for write forwarding in Aurora PostgreSQL.

Transaction access modes with write forwarding

If the transaction access mode is set to read only, write forwarding isn't used. You can set the access mode to read write only while you're connected to a DB cluster and session that has write forwarding enabled.

For more information on the transaction access modes, see SET TRANSACTION.

Running multipart statements with write forwarding in Aurora PostgreSQL

A DML statement might consist of multiple parts, such as a `INSERT ... SELECT` statement or a `DELETE ... WHERE` statement. In this case, the entire statement is forwarded to the primary cluster and run there.

Configuration parameters for write forwarding in Aurora PostgreSQL

The Aurora cluster parameter groups include settings for the write forwarding feature. Because these are cluster parameters, all DB instances in each cluster have the same values for these variables. Details about these parameters are summarized in the following table, with usage notes after the table.

Name	Scope	Type	Default value	Valid values
`apg_write_forward.connect_timeout`	Session	seconds	30	0–2147483647
`apg_write_forward.consistency_mode`	Session	enum	Session	`SESSION`, `EVENTUAL`, `GLOBAL`, `OFF`
`apg_write_forward.idle_in_transaction_session_timeout`	Session	milliseconds	86400000	0–2147483647
`apg_write_forward.idle_session_timeout`	Session	milliseconds	300000	0–2147483647
`apg_write_forward.max_forwarding_connections_percent`	Global	int	25	1–100

The `apg_write_forward.max_forwarding_connections_percent` parameter is the upper limit on database connection slots that can be used to handle queries forwarded from readers. It is expressed as a percentage of the `max_connections` setting for the writer DB instance in the primary cluster. For example, if `max_connections` is `800` and `apg_write_forward.max_forwarding_connections_percent` is `10`, then the writer allows a maximum of 80 simultaneous forwarded sessions. These connections come from the same

connection pool managed by the `max_connections` setting. This setting applies only on the primary cluster when at least one secondary clusters has write forwarding enabled.

Use the following settings on the secondary cluster:

- `apg_write_forward.consistency_mode` – A session-level parameter that controls the degree of read consistency on the secondary cluster. Valid values are `SESSION`, `EVENTUAL`, `GLOBAL`, or `OFF`. By default, the value is set to `SESSION`. Setting the value to `OFF` disables write forwarding in the session. To learn more about consistency levels, see Isolation and consistency for write forwarding in Aurora PostgreSQL. This parameter is relevant only in reader instances of secondary clusters that have write forwarding enabled and that are in an Aurora global database.
- `apg_write_forward.connect_timeout` – The maximum number of seconds the secondary cluster waits when establishing a connection to the primary cluster before giving up. A value of `0` means to wait indefinitely.
- `apg_write_forward.idle_in_transaction_session_timeout` – The number of milliseconds the primary cluster waits for activity on a connection that's forwarded from a secondary cluster that has an open transaction before closing it. If the session remains idle in transaction beyond this period, Aurora terminates the session. A value of `0` disables the timeout.
- `apg_write_forward.idle_session_timeout` – The number of milliseconds the primary cluster waits for activity on a connection that's forwarded from a secondary cluster before closing it. If the session remains idle beyond this period, Aurora terminates the session. A value of `0` disables the timeout.

Amazon CloudWatch metrics for write forwarding in Aurora PostgreSQL

The following Amazon CloudWatch metrics apply to the primary cluster when you use write forwarding on one or more secondary clusters. These metrics are all measured on the writer DB instance in the primary cluster.

CloudWatch Metric	Units and description
`AuroraForwardingWriterDMLThroughput`	Count (per second). Number of forwarded DML statements processed each second by this writer DB instance.
`AuroraForwardingWriterOpenSessions`	Count. Number of open sessions on this writer DB instance processing forwarded queries.

CloudWatch Metric	Units and description
AuroraForwardingWriterTotalSessions	Count. Total number of forwarded sessions on this writer DB instance.

The following CloudWatch metrics apply to each secondary cluster. These metrics are measured on each reader DB instance in a secondary cluster with write forwarding enabled.

CloudWatch Metric	Unit and description
AuroraForwardingReplicaCommitThroughput	Count (per second). Number of commits in sessions forwarded by this replica each second.
AuroraForwardingReplicaDMLLatency	Milliseconds. Average response time in milliseconds of forwarded DMLs on replica.
AuroraForwardingReplicaDMLThroughput	Count (per second). Number of forwarded DML statements processed on this replica each second.
AuroraForwardingReplicaErrorSessionsLimit	Count. Number of sessions rejected by the primary cluster because the limit for max connections or max write forward connections was reached.
AuroraForwardingReplicaOpenSessions	Count. The number of sessions that are using write forwarding on a replica instance.
AuroraForwardingReplicaReadWaitLatency	Milliseconds. Average wait time in milliseconds that the replica waits to be consistent with the LSN of the primary cluster. The degree to which the reader DB instance waits depends on the apg_write_forward.consistency_mode setting. For information about this setting, see the section called “Configuration

CloudWatch Metric	Unit and description
	parameters for write forwarding in Aurora PostgreSQL".

Wait events for write forwarding in Aurora PostgreSQL

Amazon Aurora generates the following wait events when you use write forwarding with Aurora PostgreSQL.

Topics

- IPC:AuroraWriteForwardConnect
- IPC:AuroraWriteForwardConsistencyPoint
- IPC:AuroraWriteForwardExecute
- IPC:AuroraWriteForwardGetGlobalConsistencyPoint
- IPC:AuroraWriteForwardXactAbort
- IPC:AuroraWriteForwardXactCommit
- IPC:AuroraWriteForwardXactStart

IPC:AuroraWriteForwardConnect

The `IPC:AuroraWriteForwardConnect` event occurs when a backend process on the secondary DB cluster is waiting for a connection to the writer node of the primary DB cluster to be opened.

Likely causes of increased waits

This event increases as the number of connection attempts from a secondary Region's reader node to the writer node of the primary DB cluster increases.

Actions

Reduce the number of simultaneous connections from a secondary node to the primary Region's writer node.

IPC:AuroraWriteForwardConsistencyPoint

The `IPC:AuroraWriteForwardConsistencyPoint` event describes how long a query from a node on the secondary DB cluster will wait for the results of forwarded write operations to

be replicated to the current Region. This event is only generated if the session-level parameter `apg_write_forward.consistency_mode` is set to one of the following:

- `SESSION` – queries on a secondary node wait for the results of all changes made in that session.
- `GLOBAL` – queries on a secondary node wait for the results of changes made by that session, plus all committed changes from both the primary Region and other secondary Regions in the global cluster.

For more information about the `apg_write_forward.consistency_mode` parameter settings, see the section called “Configuration parameters for write forwarding in Aurora PostgreSQL”.

Likely causes of increased waits

Common causes for longer wait times include the following:

- Increased replica lag, as measured by the Amazon CloudWatch `ReplicaLag` metric. For more information about this metric, see Monitoring Aurora PostgreSQL replication.
- Increased load on the primary Region's writer node or on the secondary node.

Actions

Change your consistency mode, depending on your application's requirements.

IPC:AuroraWriteForwardExecute

The `IPC:AuroraWriteForwardExecute` event occurs when a backend process on the secondary DB cluster is waiting for a forwarded query to complete and obtain results from the writer node of the primary DB cluster.

Likely causes of increased waits

Common causes for increased waits include the following:

- Fetching a large number of rows from the primary Region's writer node.
- Increased network latency between the secondary node and primary Region's writer node increases the time it takes the secondary node to receive data from the writer node.
- Increased load on the secondary node can delay transmission of the query request from the secondary node to the primary Region's writer node.

- Increased load on the primary Region's writer node can delay transmission of data from the writer node to the secondary node.

Actions

We recommend different actions depending on the causes of your wait event.

- Optimize queries to retrieve only necessary data.
- Optimize data manipulation language (DML) operations to only modify necessary data.
- If the secondary node or primary Region's writer node is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

IPC:AuroraWriteForwardGetGlobalConsistencyPoint

The `IPC:AuroraWriteForwardGetGlobalConsistencyPoint` event occurs when a backend process on the secondary DB cluster that's using the GLOBAL consistency mode is waiting to obtain the global consistency point from the writer node before executing a query.

Likely causes of increased waits

Common causes for increased waits include the following:

- Increased network latency between the secondary node and primary Region's writer node increases the time it takes the secondary node to receive data from the writer node.
- Increased load on the secondary node can delay transmission of the query request from the secondary node to the primary Region's writer node.
- Increased load on the primary Region's writer node can delay transmission of data from the writer node to the secondary node.

Actions

We recommend different actions depending on the causes of your wait event.

- Change your consistency mode, depending on your application's requirements.
- If the secondary node or primary Region's writer node is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

IPC:AuroraWriteForwardXactAbort

The `IPC:AuroraWriteForwardXactAbort` event occurs when a backend process on the secondary DB cluster is waiting for the result of a remote cleanup query. Cleanup queries are issued to return the process to the appropriate state after a write-forwarded transaction is aborted. Amazon Aurora performs them either because an error was found or because an user issued an explicit `ABORT` command or cancelled a running query.

Likely causes of increased waits

Common causes for increased waits include the following:

- Increased network latency between the secondary node and primary Region's writer node increases the time it takes the secondary node to receive data from the writer node.
- Increased load on the secondary node can delay transmission of the cleanup query request from the secondary node to the primary Region's writer node.
- Increased load on the primary Region's writer node can delay transmission of data from the writer node to the secondary node.

Actions

We recommend different actions depending on the causes of your wait event.

- Investigate the cause of the aborted transaction.
- If the secondary node or primary Region's writer node is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

IPC:AuroraWriteForwardXactCommit

The `IPC:AuroraWriteForwardXactCommit` event occurs when a backend process on the secondary DB cluster is waiting for the result of a forwarded commit transaction command.

Likely causes of increased waits

Common causes for increased waits include the following:

- Increased network latency between the secondary node and primary Region's writer node increases the time it takes the secondary node to receive data from the writer node.

- Increased load on the secondary node can delay transmission of the query request from the secondary node to the primary Region's writer node.
- Increased load on the primary Region's writer node can delay transmission of data from the writer node to the secondary node.

Actions

If the secondary node or primary Region's writer node is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

IPC:AuroraWriteForwardXactStart

The `IPC:AuroraWriteForwardXactStart` event occurs when a backend process on the secondary DB cluster is waiting for the result of a forwarded start transaction command.

Likely causes of increased waits

Common causes for increased waits include the following:

- Increased network latency between the secondary node and primary Region's writer node increases the time it takes the secondary node to receive data from the writer node.
- Increased load on the secondary node can delay transmission of the query request from the secondary node to the primary Region's writer node.
- Increased load on the primary Region's writer node can delay transmission of data from the writer node to the secondary node.

Actions

If the secondary node or primary Region's writer node is constrained by CPU or network bandwidth, consider changing it to an instance type with more CPU capacity or more network bandwidth.

Using switchover or failover in Amazon Aurora Global Database

The Aurora Global Database feature provides more business continuity and disaster recovery (BCDR) protection than the standard high availability provided by an Aurora DB cluster in a single

Amazon Web Services Region. By using Aurora Global Database, you can plan for faster recovery from rare, unplanned Regional disasters or complete service-level outages quickly.

You can consult the following guidance and procedures to plan, test, and implement your BCDR strategy using the Aurora Global Database feature.

Topics

- Planning for business continuity and disaster recovery
- Performing switchovers for Amazon Aurora global databases
- Recovering an Amazon Aurora global database from an unplanned outage
- Managing RPOs for Aurora PostgreSQL–based global databases
- Cross-Region resiliency for Global Database secondary clusters

Planning for business continuity and disaster recovery

To plan your business continuity and disaster recovery strategy, it's helpful to understand the following industry terminology and how those terms relate to Aurora Global Database features.

Recovery from disaster is typically driven by the following two business objectives:

- **Recovery time objective (RTO)** – The time it takes a system to return to a working state after a disaster or service outage. In other words, RTO measures downtime. For Aurora Global Database, RTO can be in the order of minutes.
- **Recovery point objective (RPO)** – The amount of data that can be lost (measured in time) after a disaster or service outage. This data loss is usually due to asynchronous replication lag. For an Aurora global database, RPO is typically measured in seconds. With an Aurora PostgreSQL–based global database, you can use the `rds.global_db_rpo` parameter to set and track the upper bound on RPO, but doing so might affect transaction processing on the primary cluster's writer node. For more information, see Managing RPOs for Aurora PostgreSQL–based global databases.

Performing a switchover or failover with Aurora Global Database involves promoting a secondary DB cluster to be the primary DB cluster. The term "regional outage" is often used to describe a variety of failure scenarios. A worst case scenario could be a wide-spread outage from a catastrophic event that affects hundreds of square miles. However, most outages are much more localized, affecting only a small subset of cloud services or customer systems. Consider the full scope of the outage to make sure cross-Region failover is the proper solution and to choose the

appropriate failover method for the situation. Whether you should use the failover or switchover approach depends on the specific outage scenario:

- **Failover** – Use this approach to recover from an unplanned outage. With this approach, you perform a cross-Region failover to one of the secondary DB clusters in your Aurora global database. The RPO for this approach is typically a non-zero value measured in seconds. The amount of data loss depends on the Aurora global database replication lag across the Amazon Web Services Regions at the time of the failure. To learn more, see Recovering an Amazon Aurora global database from an unplanned outage.
- **Switchover** – This operation was previously called "managed planned failover". Use this approach for controlled scenarios, such as operational maintenance and other planned operational procedures where all the Aurora clusters and other services they interact with are in a healthy state. Because this feature synchronizes secondary DB clusters with the primary before making any other changes, RPO is 0 (no data loss). To learn more, see Performing switchovers for Amazon Aurora global databases.

> **Note**
>
> Before you can perform a switchover or failover to a headless secondary Aurora DB cluster, you must add a DB instance to it. For more information about headless DB clusters, see Creating a headless Aurora DB cluster in a secondary Region.

Performing switchovers for Amazon Aurora global databases

> **Note**
>
> Switchovers were previously called **managed planned failovers**.

By using switchovers, you can change the Region of your primary cluster on a routine basis. This approach is intended for controlled scenarios, such as operational maintenance and other planned operational procedures.

There are three common use cases for using switchovers.

- For "regional rotation" requirements imposed on specific industries. For example, financial service regulations might want tier-0 systems to switch to a different Region for several months to ensure that disaster recovery procedures are regularly exercised.
- For multi-Region "follow-the-sun" applications. For example, a business might want to provide lower latency writes in different Regions based on business hours across different time zones.
- As a zero-data-loss method to fail back to the original primary Region after a failover.

> **Note**
>
> Switchovers are designed to be used on a an Aurora global database where all the Aurora clusters and other services they interact with are in a healthy state. To recover from an unplanned outage, follow the appropriate procedure in Recovering an Amazon Aurora global database from an unplanned outage.
> You can perform managed cross-Region switchovers with Aurora Global Database only if the primary and secondary DB clusters have the same major and minor engine versions. Depending on the engine and engine versions, the patch levels might need to be identical or the patch levels can be different. For a list of engines and engine versions that allow these operations between primary and secondary clusters with different patch levels, see Patch level compatibility for managed cross-Region switchovers and failovers. Before you begin the switchover, check the engine versions in your global cluster to make sure that they support managed cross-Region switchover, and upgrade them if needed.

During a switchover, Aurora makes the cluster in your chosen secondary Region be your primary cluster. The switchover mechanism maintains your global database's existing replication topology: it still has the same number of Aurora clusters in the same Regions. Before Aurora starts the switchover process, it waits for the target secondary Region clusters to be fully synchronized with the primary Region cluster. Then, the DB cluster in the primary Region becomes read-only. The chosen secondary cluster promotes one of its read-only nodes to full writer status, which allows that secondary cluster to assume the role of primary cluster. Because the target secondary cluster was synchronized with the primary at the beginning of the process, the new primary continues operations for the Aurora global database without losing any data. Your database is unavailable for a short time while the primary and selected secondary clusters assume their new roles. On qualifying engine versions (Aurora MySQL 3.09 / MySQL 8.0.40 or higher, or Aurora PostgreSQL 16.8, 15.12, 14.17, 13.20, or higher), switchover recovery time for read/write operations is typically

under 30 seconds. The faster switchover is available automatically after you upgrade, with no additional configuration.

> **Note**
>
> To manage replication slots for Aurora PostgreSQL after performing a switchover, see Managing logical slots for Aurora PostgreSQL.

To optimize application availability, we recommend that you do the following before using this feature:

- Perform this operation during nonpeak hours or at another time when writes to the primary DB cluster are minimal.
- Check lag times for all secondary Aurora DB clusters in the Aurora global database. For all Aurora PostgreSQL-based global databases and for Aurora MySQL-based global databases starting with engine versions 3.04.0 and higher or 2.12.0 and higher, use Amazon CloudWatch to view the `AuroraGlobalDBRPOLag` metric for all secondary DB clusters. For lower minor versions of Aurora MySQL-based global databases, view the `AuroraGlobalDBReplicationLag` metric instead. These metrics show you how far behind (in milliseconds) replication to a secondary cluster is to the primary DB cluster. This value is directly proportional to the time it takes for Aurora to complete the switchover. Therefore, the larger the lag value, the longer the switchover will take. When you examine these metrics, do so from the current primary cluster.

  For more information about CloudWatch metrics for Aurora, see Cluster-level metrics for Amazon Aurora.
- The secondary DB cluster that's promoted during a switchover might have different configuration settings than the old primary DB cluster. We recommend that you keep the following types of configuration settings consistent across all the clusters in your Aurora global database clusters. Doing so helps to minimize performance issues, workload incompatibilities, and other anomalous behavior after a switchover.
  - **Configure Aurora DB cluster parameter group for the new primary, if necessary** – When you promote a secondary DB cluster to take over the primary role, the parameter group from the secondary might be configured differently than for the primary. If so, modify the promoted secondary DB cluster's parameter group to conform to your primary cluster's settings. To learn how, see Modifying parameters for an Aurora global database.

- **Configure monitoring tools and options, such as Amazon CloudWatch Events and alarms** – Configure the promoted DB cluster with the same logging ability, alarms, and so on as needed for the global database. As with parameter groups, configuration for these features isn't inherited from the primary during the switchover process. Some CloudWatch metrics, such as replication lag, are only available for secondary Regions. Thus, a switchover changes how to view those metrics and set alarms on them, and could require changes to any predefined dashboards. For more information about Aurora DB clusters and monitoring, see Monitoring Amazon Aurora metrics with Amazon CloudWatch.
- **Configure integrations with other Amazon services** – If your Aurora global database integrates with Amazon services, such as Amazon Secrets Manager, Amazon Identity and Access Management, Amazon S3, and Amazon Lambda, make sure to configure your integrations with these services as needed. For more information about integrating Aurora global databases with IAM, Amazon S3 and Lambda, see Using Amazon Aurora global databases with other Amazon services. To learn more about Secrets Manager, see How to automate replication of secrets in Amazon Secrets Manager across Amazon Web Services Regions.

If you are using the Aurora Global Database writer endpoint, you don't need to change the connection settings in your application. Verify that the DNS changes have propagated and that you can connect and perform write operations on the new primary cluster. Then you can resume full operation of your application.

Suppose that your application connections use the cluster endpoint of the old primary cluster, instead of the global writer endpoint. In that case, make sure to change the your application connection settings to use the cluster endpoint of the new primary cluster. If you accepted the provided names when you created the Aurora global database, you can change the endpoint by removing the `-ro` from the promoted cluster's endpoint string in your application. For example, the secondary cluster's endpoint `my-global.cluster-ro-aaaaaabbbbbb.us-west-1.rds.amazonaws.com` becomes `my-global.cluster-aaaaaabbbbbb.us-west-1.rds.amazonaws.com` when that cluster is promoted to primary.


If you're using RDS Proxy, make sure to redirect your application's write operations to the appropriate read/write endpoint of the proxy that's associated with the new primary cluster. This proxy endpoint might be the default endpoint or a custom read/write endpoint. For more information see How RDS Proxy endpoints work with global databases.

You can perform an Aurora Global Database switchover using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.


Console

To perform the switchover on your Aurora global database

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases** and find the Aurora global database where you intend to perform the switchover.
3. Choose **Switch over or fail over global database** from the **Actions** menu.

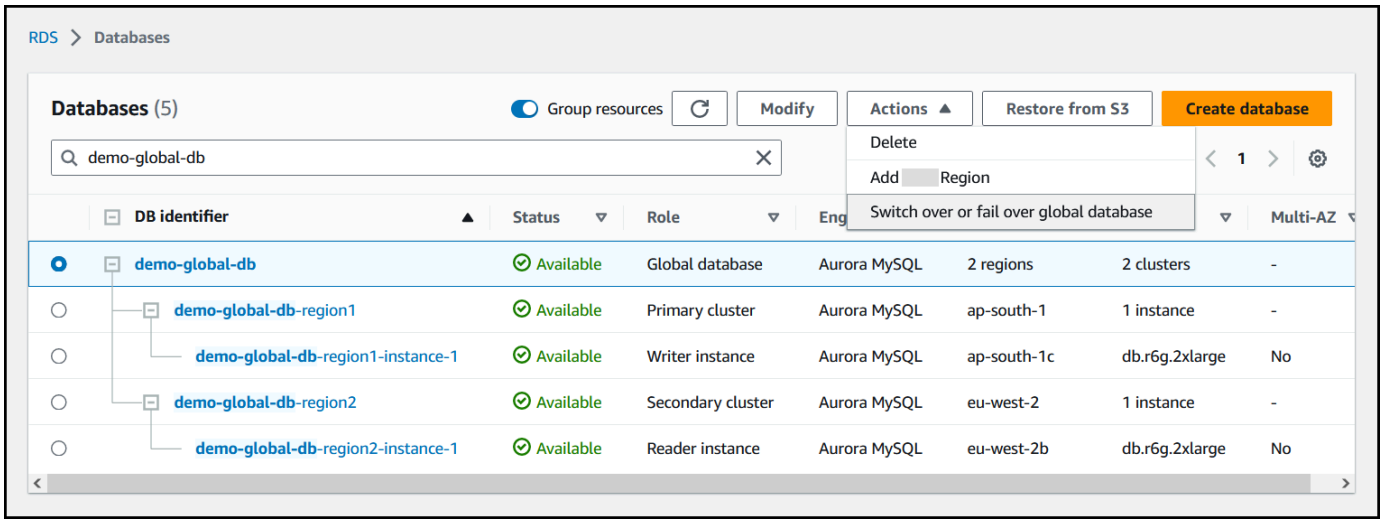


4. Choose **Switchover**.

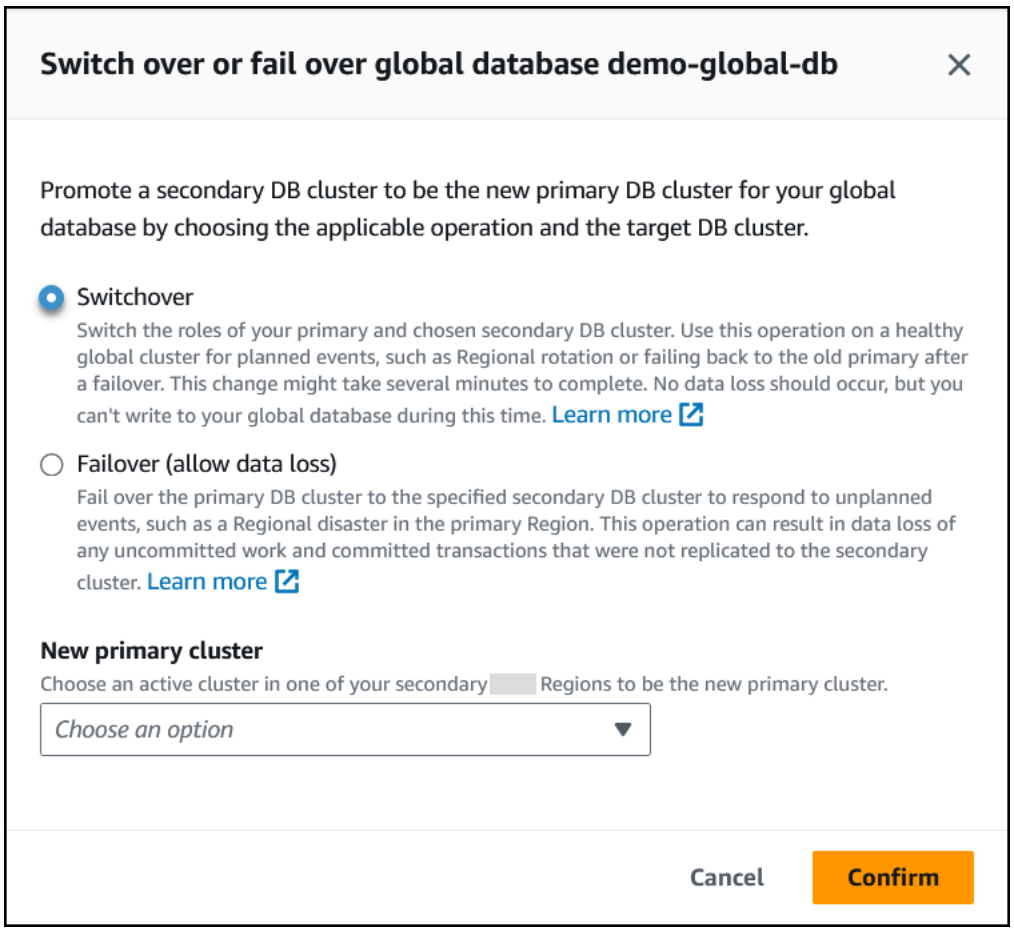

5. For **New primary cluster**, choose an active cluster in one of your secondary Amazon Web Services Regions to be the new primary cluster.
6. Choose **Confirm**.

When the switchover completes, you can see the Aurora DB clusters and their current roles in the **Databases** list, as shown in the following image.

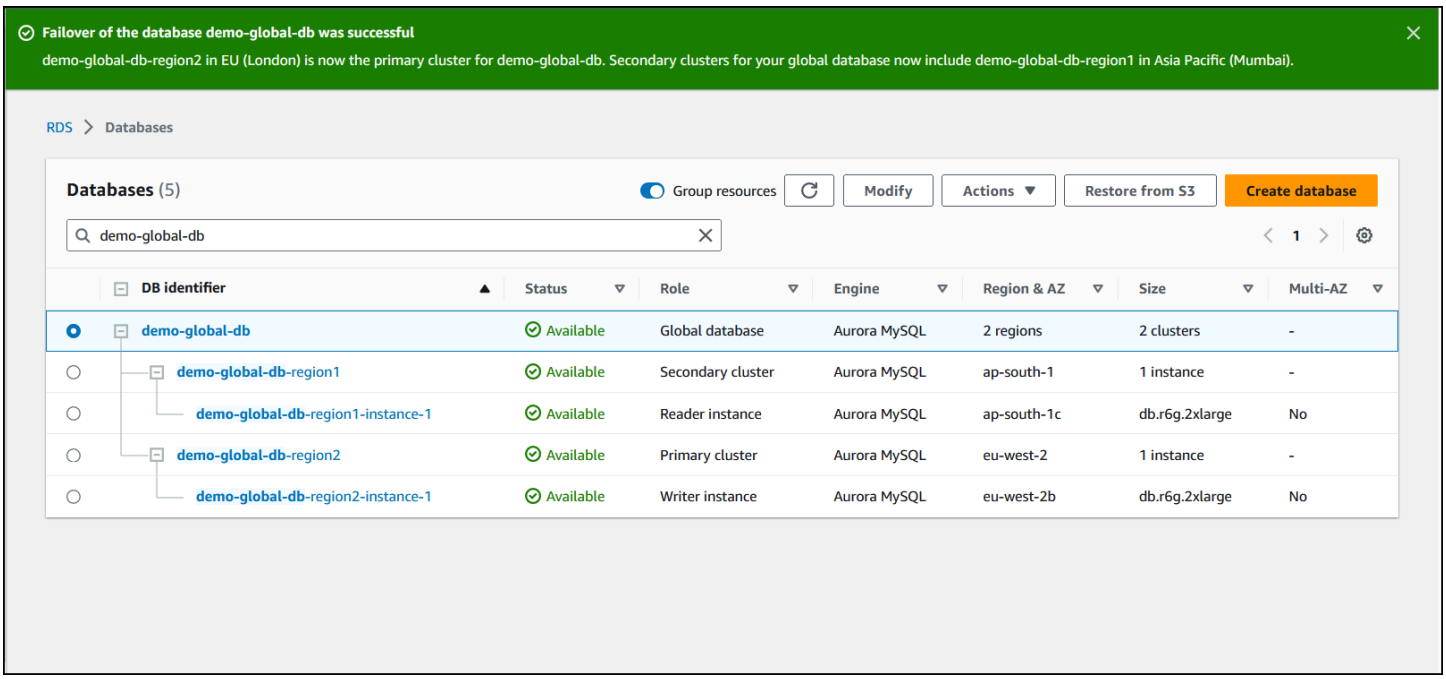

Amazon CLI

To perform the switchover on an Aurora global database

Use the `switchover-global-cluster` CLI command to perform a switchover for Aurora Global Database. With the command, pass values for the following parameters.

- `--region` – Specify the Amazon Web Services Region where the primary DB cluster of the Aurora global database is running.
- `--global-cluster-identifier` – Specify the name of your Aurora global database.
- `--target-db-cluster-identifier` – Specify the Amazon Resource Name (ARN) of the Aurora DB cluster that you want to promote to be the primary for the Aurora global database.

For Linux, macOS, or Unix:

```
aws rds --region region_of_primary \
   switchover-global-cluster --global-cluster-identifier global_database_id \
  --target-db-cluster-identifier arn_of_secondary_to_promote
```

For Windows:

```
aws rds --region region_of_primary ^
```

```
 switchover-global-cluster --global-cluster-identifier global_database_id ^
--target-db-cluster-identifier arn_of_secondary_to_promote
```

RDS API

To perform a switchover for Aurora Global Database, run the SwitchoverGlobalCluster API operation.

Recovering an Amazon Aurora global database from an unplanned outage

On rare occasions, your Aurora global database might experience an unexpected outage in its primary Amazon Web Services Region. If this happens, your primary Aurora DB cluster and its writer node aren't available, and the replication between the primary and secondary DB clusters stops. To minimize both downtime (RTO) and data loss (RPO), you can work quickly to perform a cross-Region failover.

Aurora Global Database has two failover methods that you can use in a disaster recovery situation:

- Managed failover – This method is recommended for disaster recovery. When you use this method, Aurora automatically adds back the old primary Region to the global database as a secondary Region when it becomes available again. Thus, the original topology of your global cluster is maintained. To learn how to use this method, see Performing managed failovers for Aurora global databases.
- Manual failover – This alternative method can be used when managed failover isn't an option, for example, when your primary and secondary Regions are running incompatible engine versions. To learn how to use this method, see Performing manual failovers for Aurora global databases.

> **Important**
>
> Both failover methods can result in a loss of write transaction data that wasn't replicated to the chosen secondary before the failover event occurred. However, the recovery process that promotes a DB instance on the chosen secondary DB cluster to be the primary writer DB instance guarantees that the data is in a transactionally consistent state. Failovers are also susceptible to *split-brain* issues.

Performing managed failovers for Aurora global databases

This approach is intended for business continuity in the event of a true Regional disaster or complete service-level outage.

During a managed failover, the secondary cluster in your chosen secondary Region becomes the new primary cluster. The chosen secondary cluster promotes one of its read-only nodes to full writer status. This step allows the cluster to assume the role of primary cluster. Your database is unavailable for a short time while this cluster is assuming its new role. As soon as that old primary Region is healthy and available again, Aurora automatically adds it back to the global cluster as a secondary Region. Thus, your Aurora global database's existing replication topology is maintained.

Note

To manage replication slots for Aurora PostgreSQL after performing a failover, see Managing logical slots for Aurora PostgreSQL.

Note

You can perform managed cross-Region failovers with Aurora Global Database only if the primary and secondary DB clusters have the same major and minor engine versions. Depending on the engine and engine versions, the patch levels might need to be identical or the patch levels can be different. For a list of engines and engine versions that allow these operations between primary and secondary clusters with different patch levels, see Patch level compatibility for managed cross-Region switchovers and failovers. Before you begin the failover, check the engine versions in your global cluster to make sure that they support managed cross-Region switchover, and upgrade them if needed. If your engine versions require identical patch levels but are running different patch levels, you can perform the failover manually by following the steps in Performing manual failovers for Aurora global databases.

Managed failover doesn't wait for data to synchronize between the chosen secondary Region and the current primary Region. Because Aurora Global Database replicates data asynchronously, it's possible that not all transactions replicated to the chosen secondary Amazon Region before it's promoted to accept full read/write capabilities.

To ensure the data is in a consistent state, Aurora creates a new storage volume for the old primary Region after it recovers. Before creating the new storage volume in the Amazon Region, Aurora attempts to take a snapshot of the old storage volume at the point of failure. That way, you can restore the snapshot and recover any of the missing data from it. If this operation is successful, Aurora places this snapshot named `rds:unplanned-global-failover-`*`name-of-old-primary-DB-cluster`*`-`*`timestamp`* in the snapshot section of the Amazon Web Services Management Console. You can also use the `describe-db-cluster-snapshots` Amazon CLI command or the `DescribeDBClusterSnapshots` API operation to see details for the snapshot.

When you initiate a managed failover, Aurora also attempts to halt write traffic through the highly-available Aurora storage layer. We refer to this mechanism as "write fencing". If the process succeeds, Aurora emits an RDS Event letting you know that writes were stopped. In the unlikely event of multiple AZ failures in a Region, it's possible that the write fencing process doesn't succeed in a timely manner. In that case, Aurora emits an RDS event informing you that the process to stop writes timed out. If the old primary cluster is reachable on the network, Aurora records these events there. If not, Aurora records the events on the new primary cluster. To learn more about these events, see DB cluster events. Because fencing writes is a best-effort attempt, it's possible that writes might be momentarily accepted in the old primary Region, causing split-brain issues.

We recommend that you complete the following tasks before you perform a failover with Aurora Global Database. Doing so minimizes the possibility of split-brain issues, or recovering unreplicated data from the snapshot of the old primary cluster.

- To prevent writes from being sent to the primary cluster of Aurora Global Database, take applications offline.
- Make sure that any applications that connect to the primary DB cluster are using the global writer endpoint. This endpoint has a value that remains the same even when a new Region becomes the primary cluster because of switchover or failover. Aurora implements additional safeguards to minimize the possibility of data loss for write operations submitted through the global endpoint. For more information about global writer endpoints, see Connecting to Amazon Aurora Global Database.
- If you are using the global writer endpoint and your application or networking layers cache DNS values, reduce the time-to-live (TTL) of your DNS cache to a low value such as 5 seconds. That way, your application quickly registers DNS changes with the global writer endpoint. Although Aurora attempts to block writes in the old primary Region, the action is not guaranteed to succeed. Reducing the DNS cache duration further reduces the likelihood of split-brain issues.

As an alternative, you can check for the RDS event that informs you when Aurora observed the DNS changes for the global writer endpoint. That way, you can validate that your application also registered the DNS change before restarting your application write traffic.

- Check lag times for all secondary Aurora DB clusters in the Aurora Global Database. Choosing the secondary Region with the least replication lag can minimize data loss with the current failed primary Region.

  For all versions of Aurora PostgreSQL-based global databases, and for Aurora MySQL-based global databases starting with engine versions 3.04.0 and higher or 2.12.0 and higher, use Amazon CloudWatch to view the `AuroraGlobalDBRPOLag` metric for all secondary DB clusters. For lower minor versions of Aurora MySQL-based global databases, view the `AuroraGlobalDBReplicationLag` metric instead. These metrics show you how far behind (in milliseconds) replication to a secondary cluster is to the primary DB cluster.

  For more information about CloudWatch metrics for Aurora, see Cluster-level metrics for Amazon Aurora.

During a managed failover, the chosen secondary DB cluster is promoted to its new role as primary. However, it doesn't inherit the various configuration options of the primary DB cluster. A mismatch in configuration can lead to performance issues, workload incompatibilities, and other anomalous behavior. To avoid such issues, we recommend that you resolve differences between your Aurora global database clusters for the following:

- **Configure Aurora DB cluster parameter group for the new primary, if necessary** – You can configure your Aurora DB cluster parameter groups independently for each Aurora cluster in your Aurora Global Database. Therefore, when you promote a secondary DB cluster to take over the primary role, the parameter group from the secondary might be configured differently than for the primary. If so, modify the promoted secondary DB cluster's parameter group to conform to your primary cluster's settings. To learn how, see Modifying parameters for an Aurora global database.
- **Configure monitoring tools and options, such as Amazon CloudWatch Events and alarms** – Configure the promoted DB cluster with the same logging ability, alarms, and so on as needed for the global database. As with parameter groups, configuration for these features isn't inherited from the primary during the failover process. Some CloudWatch metrics, such as replication lag, are only available for secondary Regions. Thus, a failover changes how to view those metrics and set alarms on them, and could require changes to any predefined dashboards.

For more information about monitoring Aurora DB clusters, see Monitoring Amazon Aurora metrics with Amazon CloudWatch.

- **Configure integrations with other Amazon services** – If your Aurora Global Database integrates with other Amazon services, such as Amazon Secrets Manager, Amazon Identity and Access Management, Amazon S3, and Amazon Lambda, you need to make sure these are configured as required for access from any secondary Regions. For more information about integrating Aurora global databases with IAM, Amazon S3 and Lambda, see Using Amazon Aurora global databases with other Amazon services. To learn more about Secrets Manager, see How to automate replication of secrets in Amazon Secrets Manager across Amazon Web Services Regions.

Typically, the chosen secondary cluster assumes the primary role within a few minutes. As soon as the new primary Region's writer DB instance is available, you can connect your applications to it and resume your workloads. After Aurora promotes the new primary cluster, it automatically rebuilds all additional secondary Region clusters.

Because Aurora global databases use asynchronous replication, the replication lag in each secondary Region can vary. Aurora rebuilds these secondary Regions to have the exact same point-in-time data as the new primary Region cluster. The duration of the complete rebuilding task can take a few minutes to several hours, depending on the size of the storage volume and the distance between the Regions. When the secondary Region clusters finish rebuilding from the new primary Region, they become available for read access.

As soon as the new primary writer is promoted and available, the new primary Region's cluster can handle read and write operations for the Aurora global database.

If you are using the global endpoint, you don't need to change the connection settings in your application. Verify that the DNS changes have propagated and that you can connect and perform write operations on the new primary cluster. Then you can resume full operation of your application.

If you aren't using the global endpoint, make sure to change the endpoint for your application to use the cluster endpoint for the newly promoted primary DB cluster. If you accepted the provided names when you created the Aurora global database, you can change the endpoint by removing the `-ro` from the promoted cluster's endpoint string in your application.

For example, the secondary cluster's endpoint `my-global.cluster-ro-aaaaaabbbbbb.us-west-1.rds.amazonaws.com` becomes `my-global.cluster-aaaaaabbbbbb.us-west-1.rds.amazonaws.com` when that cluster is promoted to primary.

If you are using RDS Proxy, make sure to redirect your application's write operations to the appropriate read/write endpoint of the proxy that's associated with the new primary cluster. This proxy endpoint might be the default endpoint or a custom read/write endpoint. For more information see How RDS Proxy endpoints work with global databases.

To restore the global database cluster's original topology, Aurora monitors the availability of the old primary Region. As soon as that Region is healthy and available again, Aurora automatically adds it back to the global cluster as a secondary Region. Before creating the new storage volume in the old primary Region, Aurora tries to take a snapshot of the old storage volume at the point of failure. It does this so that you can use it to recover any of the missing data. If this operation is successful, Aurora creates a snapshot named `rds:unplanned-global-failover-`*`name-of-old-primary-DB-cluster`*`-`*`timestamp`*. You can find this snapshot in the **Snapshots** section of the Amazon Web Services Management Console. You can also see this snapshot listed in the information returned by the DescribeDBClusterSnapshots API operation.

> **Note**
>
> The snapshot of the old storage volume is a system snapshot that's subject to the backup retention period configured on the old primary cluster. To preserve this snapshot outside of the retention period, you can copy it to save it as a manual snapshot. To learn more about copying snapshots, including pricing, see DB cluster snapshot copying.

After the original topology is restored, you can fail back your global database to the original primary Region by performing a switchover operation when it makes the most sense for your business and workload. To do so, follow the steps in Performing switchovers for Amazon Aurora global databases.


You can perform a failover with Aurora Global Database using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console


To perform the managed failover on your Aurora global database

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases** and find the Aurora global database where you want to perform the failover.

3. Choose **Switch over or fail over global database** from the **Actions** menu.

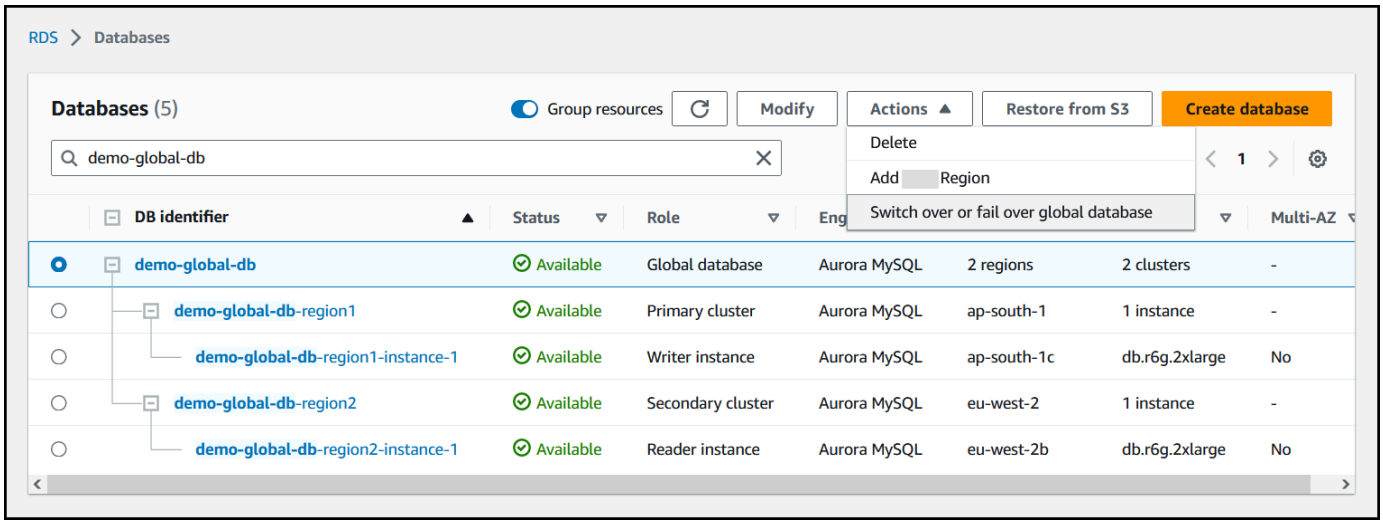


4. Choose **Failover (allow data loss)**.

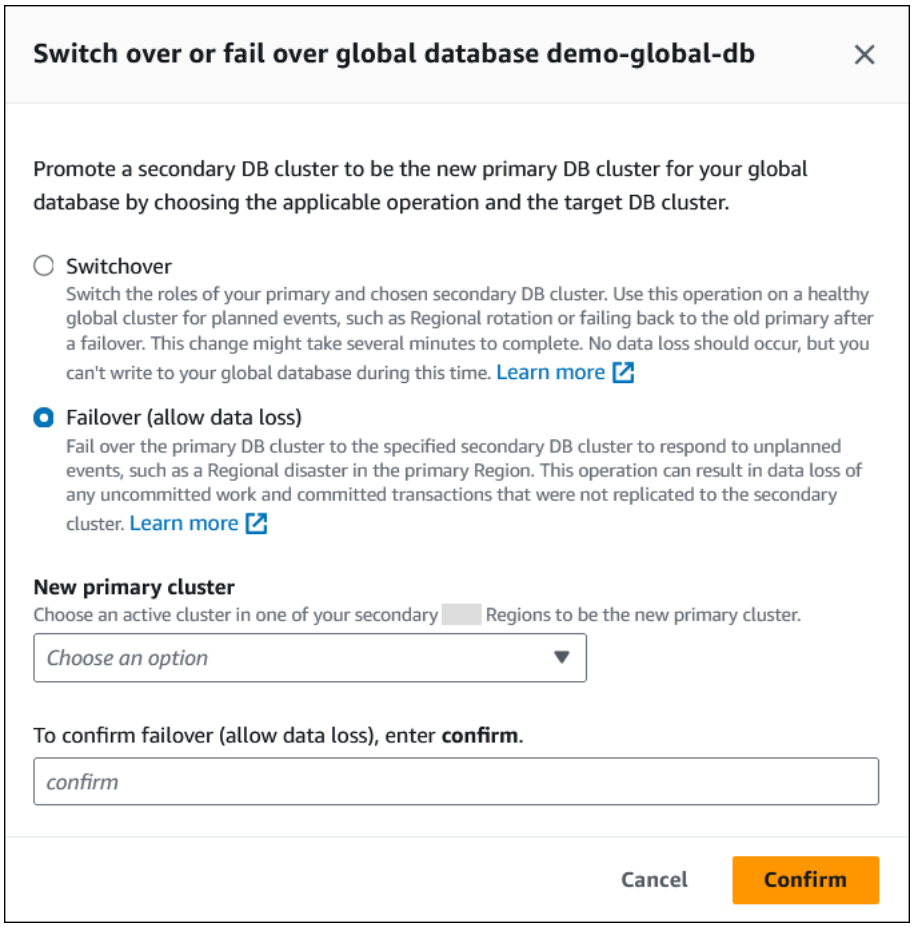

5. For **New primary cluster**, choose an active cluster in one of your secondary Amazon Web Services Regions to be the new primary cluster.

6. Enter **`confirm`**, and then choose **Confirm**.

When the failover completes, you can view the Aurora DB clusters and their current state in the **Databases** list, as shown in the following image.

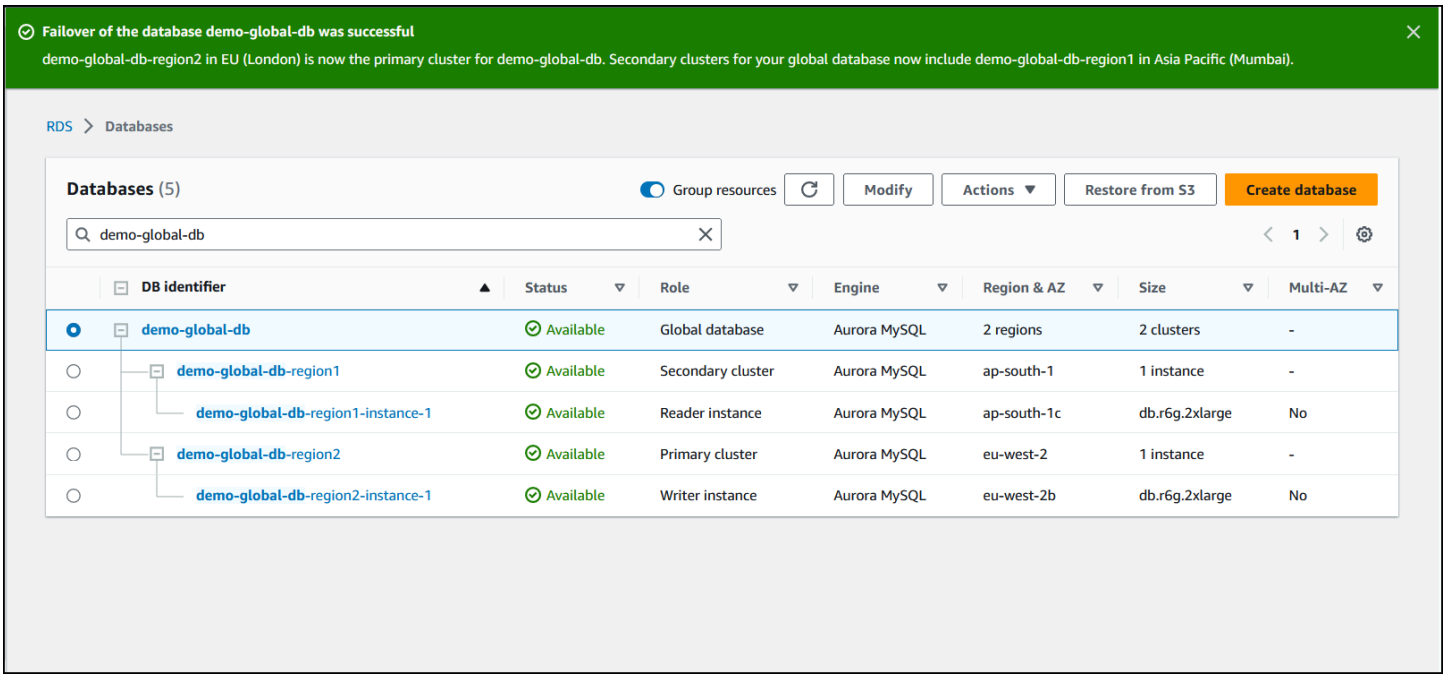

Amazon CLI

To perform the managed failover on an Aurora global database

Use the `failover-global-cluster` CLI command to perform a failover with Aurora Global Database. With the command, pass values for the following parameters.

- `--region` – Specify the Amazon Web Services Region where the secondary DB cluster that you want to be the new primary for the Aurora global database is running.
- `--global-cluster-identifier` – Specify the name of your Aurora global database.
- `--target-db-cluster-identifier` – Specify the Amazon Resource Name (ARN) of the Aurora DB cluster that you want to promote to be the new primary for the Aurora global database.
- `--allow-data-loss` – Explicitly make this a failover operation instead of a switchover operation. A failover operation can result in some data loss if the asynchronous replication components haven't completed sending all replicated data to the secondary Region.

For Linux, macOS, or Unix:

```
aws rds --region region_of_selected_secondary \
```

```
    failover-global-cluster --global-cluster-identifier global_database_id \
    --target-db-cluster-identifier arn_of_secondary_to_promote \
    --allow-data-loss
```

For Windows:

```
aws rds --region region_of_selected_secondary ^
    failover-global-cluster --global-cluster-identifier global_database_id ^
    --target-db-cluster-identifier arn_of_secondary_to_promote ^
    --allow-data-loss
```

RDS API

To perform a failover with Aurora Global Database, run the FailoverGlobalCluster API operation.

Performing manual failovers for Aurora global databases

In some scenarios, you might not be able to use the managed failover process. One example is if your primary and secondary DB clusters aren't running compatible engine versions. In this case, you can follow this manual process to perform a failover to your target secondary Region.

> **Tip**
>
> We recommend that you understand this process before using it. Have a plan ready to quickly proceed at the first sign of a Region-wide issue. You can be ready to identify the secondary Region with the least replication lag by using Amazon CloudWatch regularly to track lag times for the secondary clusters. Make sure to test your plan to check that your procedures are complete and accurate, and that staff are trained to perform a disaster recovery failover before it really happens.

To perform a manual failover to a secondary cluster after an unplanned outage in the primary Region

1. Stop issuing DML statements and other write operations to the primary Aurora DB cluster in the Amazon Web Services Region with the outage.
2. Identify an Aurora DB cluster from a secondary Amazon Web Services Region to use as a new primary DB cluster. If you have two or more secondary Amazon Web Services Regions in your Aurora global database, choose the secondary cluster that has the least replication lag.

3. Detach your chosen secondary DB cluster from the Aurora global database.

   Removing a secondary DB cluster from an Aurora global database immediately stops the replication from the primary to this secondary and promotes it to a standalone provisioned Aurora DB cluster with full read/write capabilities. Any other secondary Aurora DB clusters associated with the primary cluster in the Region with the outage are still available and can accept calls from your application. They also consume resources. Because you're recreating the Aurora global database, remove the other secondary DB clusters before creating the new Aurora global database in the following steps. Doing this avoids data inconsistencies among the DB clusters in the Aurora global database (*split-brain* issues).

   For detailed steps for detaching, see Removing a cluster from an Amazon Aurora global database.

4. Reconfigure your application to send all write operations to this now standalone Aurora DB cluster using its new endpoint. If you accepted the provided names when you created the Aurora global database, you can change the endpoint by removing the `-ro` from the cluster's endpoint string in your application.

   For example, the secondary cluster's endpoint `my-global.cluster-ro-aaaaaabbbbbb.us-west-1.rds.amazonaws.com` becomes `my-global.cluster-aaaaaabbbbbb.us-west-1.rds.amazonaws.com` when that cluster is detached from the Aurora global database.

   This Aurora DB cluster becomes the primary cluster of a new Aurora global database when you start adding Regions to it in the next step.

   If you are using RDS Proxy, make sure to redirect your application's write operations to the appropriate read/write endpoint of the proxy that's associated with the new primary cluster. This proxy endpoint might be the default endpoint or a custom read/write endpoint. For more information see How RDS Proxy endpoints work with global databases.

5. Add an Amazon Web Services Region to the DB cluster. When you do this, the replication process from primary to secondary begins. For detailed steps to add a Region, see Adding an Amazon Web Services Region to an Amazon Aurora global database.

6. Add more Amazon Web Services Regions as needed to recreate the topology needed to support your application.

Make sure that application writes are sent to the correct Aurora DB cluster before, during, and after making these changes. Doing this avoids data inconsistencies among the DB clusters in the Aurora global database (*split-brain* issues).

If you reconfigured in response to an outage in an Amazon Web Services Region, you can make that Amazon Web Services Region the primary again after the outage is resolved. To do so, you add the old Amazon Web Services Region to your new global database, and then use the switchover process to switch its role. Your Aurora global database must use a version of Aurora PostgreSQL or Aurora MySQL that supports switchovers. For more information, see Performing switchovers for Amazon Aurora global databases.

Managing RPOs for Aurora PostgreSQL–based global databases

With an Aurora PostgreSQL–based global database, you can manage the recovery point objective (RPO) for your Aurora global database by using the `rds.global_db_rpo` parameter. RPO represents the maximum amount of data that can be lost in the event of an outage.

When you set an RPO for your Aurora PostgreSQL–based global database, Aurora monitors the *RPO lag time* of all secondary clusters to make sure that at least one secondary cluster stays within the target RPO window. RPO lag time is another time-based metric.

The RPO is used when your database resumes operations in a new Amazon Web Services Region after a failover. Aurora evaluates RPO and RPO lag times to commit (or block) transactions on the primary as follows:

- Commits the transaction if at least one secondary DB cluster has an RPO lag time less than the RPO.
- Blocks the transaction if all secondary DB clusters have RPO lag times that are larger than the RPO. It also logs the event to the PostgreSQL log file and emits "wait" events that show the blocked sessions.

In other words, if all secondary clusters are behind the target RPO, Aurora pauses transactions on the primary cluster until at least one of the secondary clusters catches up. Paused transactions are resumed and committed as soon as the lag time of at least one secondary DB cluster becomes less than the RPO. The result is that no transactions can commit until the RPO is met.

The `rds.global_db_rpo` parameter is dynamic. If you decide that you don't want all write transactions to stall until the lag decreases sufficiently, you can reset it quickly. In this case, Aurora recognizes and implements the change after a short delay.

Important

In a global database with only two Amazon Regions, we recommend keeping the `rds.global_db_rpo` parameter's default value in the secondary Region's parameter group. Otherwise, performing a failover due to a loss of the primary Amazon Region could cause Aurora to pause transactions. Instead, wait until Aurora completes rebuilding the cluster in the old failed Amazon Region before changing this parameter to enforce a maximum RPO.

If you set this parameter as outlined in the following, you can also monitor the metrics that it generates. You can do so by using `psql` or another tool to query the Aurora global database's primary DB cluster and obtain detailed information about your Aurora PostgreSQL–based global database's operations. To learn how, see Monitoring Aurora PostgreSQL-based global databases.

Topics

- Setting the recovery point objective
- Viewing the recovery point objective
- Disabling the recovery point objective

Setting the recovery point objective

The `rds.global_db_rpo` parameter controls the RPO setting for a PostgreSQL database. This parameter is supported by Aurora PostgreSQL. Valid values for `rds.global_db_rpo` range from 20 seconds to 2,147,483,647 seconds (68 years). Choose a realistic value to meet your business need and use case. For example, you might want to allow up to 10 minutes for your RPO, in which case you set the value to 600.

You can set this value for your Aurora PostgreSQL–based global database by using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To set the RPO

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.

2. Choose the primary cluster of your Aurora global database and open the **Configuration** tab to find its DB cluster parameter group. For example, the default parameter group for a primary DB cluster running Aurora PostgreSQL 11.7 is `default.aurora-postgresql11`.

   Parameter groups can't be edited directly. Instead, you do the following:

   - Create a custom DB cluster parameter group using the appropriate default parameter group as the starting point. For example, create a custom DB cluster parameter group based on the `default.aurora-postgresql11`.
   - On your custom DB parameter group, set the value of the **rds.global_db_rpo** parameter to meet your use case. Valid values range from 20 seconds up to the maximum integer value of 2,147,483,647 (68 years).
   - Apply the modified DB cluster parameter group to your Aurora DB cluster.

For more information, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

Amazon CLI

To set the `rds.global_db_rpo` parameter, use the modify-db-cluster-parameter-group CLI command. In the command, specify the name of your primary cluster's parameter group and values for RPO parameter.

The following example sets the RPO to 600 seconds (10 minutes) for the primary DB cluster's parameter group named `my_custom_global_parameter_group`.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster-parameter-group \
    --db-cluster-parameter-group-name my_custom_global_parameter_group \
    --parameters
 "ParameterName=rds.global_db_rpo,ParameterValue=600,ApplyMethod=immediate"
```

For Windows:

```
aws rds modify-db-cluster-parameter-group ^
    --db-cluster-parameter-group-name my_custom_global_parameter_group ^
    --parameters
 "ParameterName=rds.global_db_rpo,ParameterValue=600,ApplyMethod=immediate"
```

RDS API

To modify the `rds.global_db_rpo` parameter, use the Amazon RDS ModifyDBClusterParameterGroup API operation.

Viewing the recovery point objective

The recovery point objective (RPO) of a global database is stored in the `rds.global_db_rpo` parameter for each DB cluster. You can connect to the endpoint for the secondary cluster you want to view and use `psql` to query the instance for this value.

```
db-name=>show rds.global_db_rpo;
```

If this parameter isn't set, the query returns the following:

```
rds.global_db_rpo
-------------------
 -1
(1 row)
```

This next response is from a secondary DB cluster that has 1 minute RPO setting.

```
rds.global_db_rpo
-------------------
 60
(1 row)
```

You can also use the CLI to get values for find out if `rds.global_db_rpo` is active on any of the Aurora DB clusters by using the CLI to get values of all `user` parameters for the cluster.

For Linux, macOS, or Unix:

```
aws rds describe-db-cluster-parameters \
 --db-cluster-parameter-group-name lab-test-apg-global \
 --source user
```

For Windows:

```
aws rds describe-db-cluster-parameters ^
 --db-cluster-parameter-group-name lab-test-apg-global *
```

```
 --source user
```

The command returns output similar to the following for all `user` parameters. that aren't `default-engine` or `system` DB cluster parameters.

```
{
    "Parameters": [
        {
            "ParameterName": "rds.global_db_rpo",
            "ParameterValue": "60",
            "Description": "(s) Recovery point objective threshold, in seconds, that
 blocks user commits when it is violated.",
            "Source": "user",
            "ApplyType": "dynamic",
            "DataType": "integer",
            "AllowedValues": "20-2147483647",
            "IsModifiable": true,
            "ApplyMethod": "immediate",
            "SupportedEngineModes": [
                "provisioned"
            ]
        }
    ]
}
```

To learn more about viewing parameters of the cluster parameter group, see Viewing parameter values for a DB cluster parameter groupin Amazon Aurora.

Disabling the recovery point objective

To disable the RPO, reset the `rds.global_db_rpo` parameter. You can reset parameters using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To disable the RPO

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Parameter groups**.
3. In the list, choose your primary DB cluster parameter group.

4. Choose **Edit parameters**.
5. Choose the box next to the **rds.global_db_rpo** parameter.
6. Choose **Reset**.
7. When the screen shows **Reset parameters in DB parameter group**, choose **Reset parameters**.

For more information on how to reset a parameter with the console, see Modifying parameters in a DB cluster parameter groupin Amazon Aurora.

Amazon CLI

To reset the `rds.global_db_rpo` parameter, use the reset-db-cluster-parameter-group command.

For Linux, macOS, or Unix:

```
aws rds reset-db-cluster-parameter-group \
    --db-cluster-parameter-group-name global_db_cluster_parameter_group \
    --parameters "ParameterName=rds.global_db_rpo,ApplyMethod=immediate"
```

For Windows:

```
aws rds reset-db-cluster-parameter-group ^
    --db-cluster-parameter-group-name global_db_cluster_parameter_group ^
    --parameters "ParameterName=rds.global_db_rpo,ApplyMethod=immediate"
```

RDS API

To reset the `rds.global_db_rpo` parameter, use the Amazon RDS API ResetDBClusterParameterGroup operation.

Cross-Region resiliency for Global Database secondary clusters

Aurora PostgreSQL versions 16.6, 15.10, 14.15, 13.18, 12.22, or higher and Aurora MySQL versions 3.09 or higher contain availability improvements that enable secondary Region read replicas to maintain service continuity during unplanned events such as hardware failures, network disruptions across Amazon Regions, large volumes of data transfers between the clusters, and others.

Although the read replicas remain available for your application requests, the replication lag may continue to increase until the resolution of the unplanned event. You can monitor the lag

between primary and secondary clusters using the `AuroraGlobalDBProgressLag` CloudWatch metric. To measure the end-to-end lag, including any lag between the cluster volume and DB instances of the secondary cluster, add the values of the `AuroraGlobalDBProgressLag` and `AuroraReplicaLag` CloudWatch metrics. For more information about metrics, refer to Metrics reference for Amazon Aurora.

The Global Database read availability for Aurora MySQL and earlier versions of Aurora PostgreSQL may be impacted during such unplanned events.

For more information about new features in Aurora PostgreSQL 16.6, 15.10, 14.15, 13.18, and 12.22, see PostgreSQL 16.6 in the *Aurora PostgreSQL Release Notes*.


For more information about new features in Aurora MySQL versions 3.09 and higher, see Database engine updates for Amazon Aurora MySQL version 3 in the *Aurora MySQL Release Notes*.

Monitoring an Amazon Aurora global database

When you create the Aurora DB clusters that make up your Aurora global database, you can choose many options that let you monitor your DB cluster's performance. These options include the following:

- Amazon RDS Performance Insights – Enables performance schema in the underlying Aurora database engine. To learn more about Performance Insights and Aurora global databases, see Monitoring an Amazon Aurora global database with Amazon RDS Performance Insights.
- Enhanced monitoring – Generates metrics for process or thread utilization on the CPU. To learn about enhanced monitoring, see Monitoring OS metrics with Enhanced Monitoring.
- Amazon CloudWatch Logs – Publishes specified log types to CloudWatch Logs. Error logs are published by default, but you can choose other logs specific to your Aurora database engine.
  - For Aurora MySQL–based Aurora DB clusters, you can export the audit log, general log, and slow query log.
  - For Aurora PostgreSQL–based Aurora DB clusters, you can export the PostgreSQL log.
- For Aurora MySQL–based global databases, you can query specific `information_schema` tables to check the status of your Aurora global database and its instances. To learn how, see Monitoring Aurora MySQL-based global databases.
- For Aurora PostgreSQL–based global databases, you can use specific functions to check the status of your Aurora global database and its instances. To learn how, see Monitoring Aurora PostgreSQL-based global databases.

The following screenshot shows some of the options available on the Monitoring tab of a primary Aurora DB cluster in an Aurora global database.

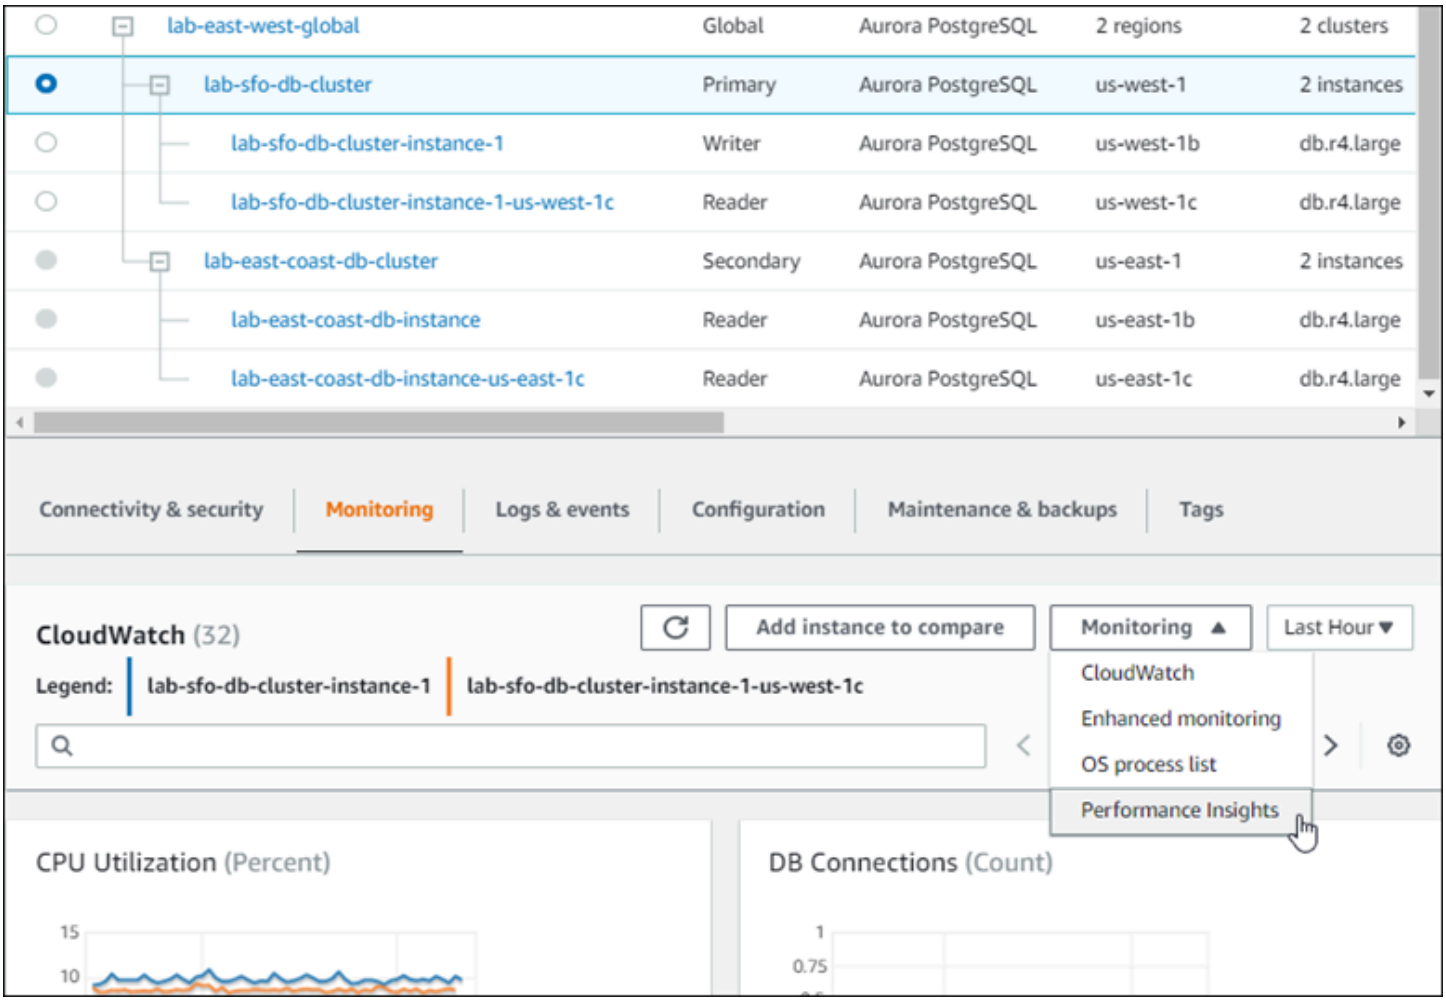

For more information, see Monitoring metrics in an Amazon Aurora cluster.

Monitoring an Amazon Aurora global database with Amazon RDS Performance Insights

You can use Amazon RDS Performance Insights for your Aurora global databases. You enable this feature individually, for each Aurora DB cluster in your Aurora global database. To do so, you choose **Enable Performance Insights** in the **Additional configuration** section of the Create database page. Or you can modify your Aurora DB clusters to use this feature after they are up and running. You can enable or turn off Performance Insights for each cluster that's part of your Aurora global database.

The reports created by Performance Insights apply to each cluster in the global database. When you add a new secondary Amazon Web Services Region to an Aurora global database that's already

using Performance Insights, be sure that you enable Performance Insights in the newly added cluster. It doesn't inherit the Performance Insights setting from the existing global database.

You can switch Amazon Web Services Regions while viewing the Performance Insights page for a DB instance that's attached to a global database. However, you might not see performance information immediately after switching Amazon Web Services Regions. Although the DB instances might have identical names in each Amazon Web Services Region, the associated Performance Insights URL is different for each DB instance. After switching Amazon Web Services Regions, choose the name of the DB instance again in the Performance Insights navigation pane.

For DB instances associated with a global database, the factors affecting performance might be different in each Amazon Web Services Region. For example, the DB instances in each Amazon Web Services Region might have different capacity.

To learn more about using Performance Insights, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

Monitoring Aurora global databases with Database Activity Streams

By using the Database Activity Streams feature, you can monitor and set alarms for auditing activity in the DB clusters in your global database. You start a database activity stream on each DB cluster separately. Each cluster delivers audit data to its own Kinesis stream within its own Amazon Web Services Region. For more information, see Monitoring Amazon Aurora with Database Activity Streams.

Monitoring Aurora MySQL-based global databases

To view the status of an Aurora MySQL-based global database, query the information_schema.aurora_global_db_status and information_schema.aurora_global_db_instance_status tables.

> **Note**
>
> The `information_schema.aurora_global_db_status` and `information_schema.aurora_global_db_instance_status` tables are only available with Aurora MySQL version 3.04.0 and higher, and version 8.4 and higher, global databases.

To monitor an Aurora MySQL-based global database

1. Connect to the global database primary cluster endpoint using a MySQL client. For more information about how to connect, see Connecting to Amazon Aurora Global Database.
2. Query the `information_schema.aurora_global_db_status` table in a mysql command to list the primary and secondary volumes. This query returns the lag times of the global database secondary DB clusters, as in the following example.

```
mysql> select * from information_schema.aurora_global_db_status;
```

```
AWS_REGION | HIGHEST_LSN_WRITTEN | DURABILITY_LAG_IN_MILLISECONDS |
 RPO_LAG_IN_MILLISECONDS | LAST_LAG_CALCULATION_TIMESTAMP | OLDEST_READ_VIEW_TRX_ID
-----------+---------------------+--------------------------------
+------------------------+---------------------------------
+------------------------
us-east-1  |           183537946 |                            0   |
      0 |  1970-01-01 00:00:00.000000     |               0
us-west-2  |           183537944 |                            428 |
      0 |  2023-02-18 01:26:41.925000     |               20806982
(2 rows)
```

The output includes a row for each DB cluster of the global database containing the following columns:

- **AWS_REGION** – The Amazon Web Services Region that this DB cluster is in. For tables listing Amazon Web Services Regions by engine, see Region availability.
- **HIGHEST_LSN_WRITTEN** – The highest log sequence number (LSN) currently written on this DB cluster.

  A *log sequence number (LSN)* is a unique sequential number that identifies a record in the database transaction log. LSNs are ordered such that a larger LSN represents a later transaction.
- **DURABILITY_LAG_IN_MILLISECONDS** – The difference in the timestamp values between the `HIGHEST_LSN_WRITTEN` on a secondary DB cluster and the `HIGHEST_LSN_WRITTEN` on the primary DB cluster. This value is always 0 on the primary DB cluster of the Aurora global database.
- **RPO_LAG_IN_MILLISECONDS** – The recovery point objective (RPO) lag. The RPO lag is the time it takes for the most recent user transaction COMMIT to be stored on a secondary DB

cluster after it's been stored on the primary DB cluster of the Aurora global database. This value is always 0 on the primary DB cluster of the Aurora global database.

In simple terms, this metric calculates the recovery point objective for each Aurora MySQL DB cluster in the Aurora global database, that is, how much data might be lost if there were an outage. As with lag, RPO is measured in time.

- **LAST_LAG_CALCULATION_TIMESTAMP** – The timestamp that specifies when values were last calculated for `DURABILITY_LAG_IN_MILLISECONDS` and `RPO_LAG_IN_MILLISECONDS`. A time value such as `1970-01-01 00:00:00+00` means this is the primary DB cluster.
- **OLDEST_READ_VIEW_TRX_ID** – The ID of the oldest transaction that the writer DB instance can purge to.

3. Query the `information_schema.aurora_global_db_instance_status` table to list all secondary DB instances for both the primary DB cluster and the secondary DB clusters.

```
mysql> select * from information_schema.aurora_global_db_instance_status;
```

```
SERVER_ID            |              SESSION_ID              | AWS_REGION
 | DURABLE_LSN | HIGHEST_LSN_RECEIVED | OLDEST_READ_VIEW_TRX_ID |
 OLDEST_READ_VIEW_LSN | VISIBILITY_LAG_IN_MSEC
--------------------+--------------------------------------+------------
+-------------+----------------------+------------------------
+----------------------+------------------------
ams-gdb-primary-i2   | MASTER_SESSION_ID                    | us-east-1  |
 183537698   |                    0 |                      0 |
 0 |                      0
ams-gdb-secondary-i1 | cc43165b-bdc6-4651-abbf-4f74f08bf931 | us-west-2  |
 183537689   |           183537692 |                20806928 |
 183537682 |                     0
ams-gdb-secondary-i2 | 53303ff0-70b5-411f-bc86-28d7a53f8c19 | us-west-2  |
 183537689   |           183537692 |                20806928 |
 183537682 |                   677
ams-gdb-primary-i1   | 5af1e20f-43db-421f-9f0d-2b92774c7d02 | us-east-1  |
 183537697   |           183537698 |                20806930 |
 183537691 |                    21
(4 rows)
```

The output includes a row for each DB instance of the global database containing the following columns:

- **SERVER_ID** – The server identifier for the DB instance.
- **SESSION_ID** – A unique identifier for the current session. A value of `MASTER_SESSION_ID` identifies the Writer (primary) DB instance.
- **AWS_REGION** – The Amazon Web Services Region that this DB instance is in. For tables listing Amazon Web Services Regions by engine, see Region availability.
- **DURABLE_LSN** – The LSN made durable in storage.
- **HIGHEST_LSN_RECEIVED** – The highest LSN received by the DB instance from the writer DB instance.
- **OLDEST_READ_VIEW_TRX_ID** – The ID of the oldest transaction that the writer DB instance can purge to.
- **OLDEST_READ_VIEW_LSN** – The oldest LSN used by the DB instance to read from storage.
- **VISIBILITY_LAG_IN_MSEC** – For readers in the primary DB cluster, how far this DB instance is lagging behind the writer DB instance in milliseconds. For readers in a secondary DB cluster, how far this DB instance is lagging behind the secondary volume in milliseconds.

To see how these values change over time, consider the following transaction block where a table insert takes an hour.

```
mysql> BEGIN;
mysql> INSERT INTO table1 SELECT Large_Data_That_Takes_1_Hr_To_Insert;
mysql> COMMIT;
```

In some cases, there might be a network disconnect between the primary DB cluster and the secondary DB cluster after the `BEGIN` statement. If so, the secondary DB cluster's **DURABILITY_LAG_IN_MILLISECONDS** value starts increasing. At the end of the `INSERT` statement, the **DURABILITY_LAG_IN_MILLISECONDS** value is 1 hour. However, the **RPO_LAG_IN_MILLISECONDS** value is 0 because all the user data committed between the primary DB cluster and secondary DB cluster are still the same. As soon as the `COMMIT` statement completes, the **RPO_LAG_IN_MILLISECONDS** value increases.

Monitoring Aurora PostgreSQL-based global databases

To view the status of an Aurora PostgreSQL-based global database, use the `aurora_global_db_status` and `aurora_global_db_instance_status` functions.

> **Note**
>
> Only Aurora PostgreSQL supports the `aurora_global_db_status` and `aurora_global_db_instance_status` functions.

To monitor an Aurora PostgreSQL-based global database

1. Connect to the global database primary cluster endpoint using a PostgreSQL utility such as psql. For more information about how to connect, see Connecting to Amazon Aurora Global Database.
2. Use the `aurora_global_db_status` function in a psql command to list the primary and secondary volumes. This shows the lag times of the global database secondary DB clusters.

```
postgres=> select * from aurora_global_db_status();
```

```
aws_region | highest_lsn_written | durability_lag_in_msec | rpo_lag_in_msec |
 last_lag_calculation_time  | feedback_epoch | feedback_xmin
------------+---------------------+------------------------+-----------------
+----------------------------+----------------+---------------
us-east-1  |         93763984222 |                     -1 |              -1 |
 1970-01-01 00:00:00+00     |              0 |              0
us-west-2  |         93763984222 |                    900 |            1090 |
 2020-05-12 22:49:14.328+00 |              2 |    3315479243
(2 rows)
```

The output includes a row for each DB cluster of the global database containing the following columns:

- **aws_region** – The Amazon Web Services Region that this DB cluster is in. For tables listing Amazon Web Services Regions by engine, see Region availability.
- **highest_lsn_written** – The highest log sequence number (LSN) currently written on this DB cluster.

  A *log sequence number (LSN)* is a unique sequential number that identifies a record in the database transaction log. LSNs are ordered such that a larger LSN represents a later transaction.

- **durability_lag_in_msec** – The timestamp difference between the highest log sequence number written on a secondary DB cluster (`highest_lsn_written`) and the `highest_lsn_written` on the primary DB cluster.
- **rpo_lag_in_msec** – The recovery point objective (RPO) lag. This lag is the time difference between the most recent user transaction commit stored on a secondary DB cluster and the most recent user transaction commit stored on the primary DB cluster.
- **last_lag_calculation_time** – The timestamp when values were last calculated for `durability_lag_in_msec` and `rpo_lag_in_msec`.
- **feedback_epoch** – The epoch a secondary DB cluster uses when it generates hot standby information.

  Hot standby is when a DB cluster can connect and query while the server is in recovery or standby mode. Hot standby feedback is information about the DB cluster when it's in hot standby. For more information, see Hot standby in the PostgreSQL documentation.
- **feedback_xmin** – The minimum (oldest) active transaction ID used by a secondary DB cluster.

3. Use the `aurora_global_db_instance_status` function to list all secondary DB instances for both the primary DB cluster and secondary DB clusters.

```
postgres=> select * from aurora_global_db_instance_status();
```

```
server_id                                    |              session_id
  | aws_region | durable_lsn | highest_lsn_rcvd | feedback_epoch | feedback_xmin |
 oldest_read_view_lsn | visibility_lag_in_msec
----------------------------------------------+--------------------------------------
+------------+-------------+------------------+----------------+---------------
+----------------------+-----------------------
apg-global-db-rpo-mammothrw-elephantro-1-n1 | MASTER_SESSION_ID
 | us-east-1  | 93763985102 |                  |                |               |
                    |
apg-global-db-rpo-mammothrw-elephantro-1-n2 | f38430cf-6576-479a-b296-dc06b1b1964a
 | us-east-1  | 93763985099 |      93763985102 |              2 |    3315479243 |
        93763985095 |                     10
apg-global-db-rpo-elephantro-mammothrw-n1   | 0d9f1d98-04ad-4aa4-8fdd-e08674cbbbfe
 | us-west-2  | 93763985095 |      93763985099 |              2 |    3315479243 |
        93763985089 |                   1017
(3 rows)
```

The output includes a row for each DB instance of the global database containing the following columns:

- **server_id** – The server identifier for the DB instance.
- **session_id** – A unique identifier for the current session.
- **aws_region** – The Amazon Web Services Region that this DB instance is in. For tables listing Amazon Web Services Regions by engine, see Region availability.
- **durable_lsn** – The LSN made durable in storage.
- **highest_lsn_rcvd** – The highest LSN received by the DB instance from the writer DB instance.
- **feedback_epoch** – The epoch the DB instance uses when it generates hot standby information.

  Hot standby is when a DB instance can connect and query while the server is in recovery or standby mode. Hot standby feedback is information about the DB instance when it's in hot standby. For more information, see the PostgreSQL documentation on Hot standby.
- **feedback_xmin** – The minimum (oldest) active transaction ID used by the DB instance.
- **oldest_read_view_lsn** – The oldest LSN used by the DB instance to read from storage.
- **visibility_lag_in_msec** – How far this DB instance is lagging behind the writer DB instance.

To see how these values change over time, consider the following transaction block where a table insert takes an hour.

```
psql> BEGIN;
psql> INSERT INTO table1 SELECT Large_Data_That_Takes_1_Hr_To_Insert;
psql> COMMIT;
```

In some cases, there might be a network disconnect between the primary DB cluster and the secondary DB cluster after the `BEGIN` statement. If so, the secondary DB cluster's `durability_lag_in_msec` value starts increasing. At the end of the `INSERT` statement, the `durability_lag_in_msec` value is 1 hour. However, the `rpo_lag_in_msec` value is 0 because all the user data committed between the primary DB cluster and secondary DB cluster are still the same. As soon as the `COMMIT` statement completes, the `rpo_lag_in_msec` value increases.

Using Blue/Green Deployments for Amazon Aurora Global Database

Amazon RDS Blue/Green Deployments provide a capability for testing database changes safely. For your global database, blue/green deployments allow you to perform upgrades and maintenance operations with minimal downtime. You can create a fully managed staging environment (green) that mirrors your entire production environment (blue), including the primary cluster and all associated secondary regions across multiple Amazon Regions. The staging environment reflects your production setup, enabling you to reliably test changes before switching over to the new environment. Throughout the process, blue/green deployments keep the staging and production environments in sync. When ready to make your staging environment the new production environment, perform a blue/green switchover. This operation transitions your primary and all secondary regions to the green environment, with downtime typically under one minute. The service automatically renames clusters, instances, and endpoints to match the original production environment, enabling your applications to access the new production environment without requiring any configuration changes and minimizing operational overhead.

Topics

- Benefits of using Blue/Green Deployments with Aurora Global Database
- How Blue/Green Deployments work with Aurora Global Database


Benefits of using Blue/Green Deployments with Aurora Global Database


- Perform major version, minor version, and system updates including database patches and OS upgrades on Aurora Global Databases, while maintaining minimal downtime.
- Create a production-ready staging (green) environment in both primary and secondary regions of the global database to test and implement newer database features.
- Switchover safely using built-in switchover guardrails with downtime typically under one minute, depending on your workload.
- Maintains disaster recovery capabilities during the Blue/Green switchover process, allowing Global Database failover during the Blue/Green switchover.
- Your traffic will be directed to the new production environment without requiring any application changes.

How Blue/Green Deployments work with Aurora Global Database


For details on how to create, view, switch, and delete a Blue/Green Deployment, see Using Amazon Aurora Blue/Green Deployments for database updates. You can use this for major or minor version upgrades, database performance improvements through parameter updates, and adoption of new database features, with minimal downtime.

A representation of how a blue/green deployment for Aurora Global Database with one secondary region looks before and after a blue/green switchover is shown below.

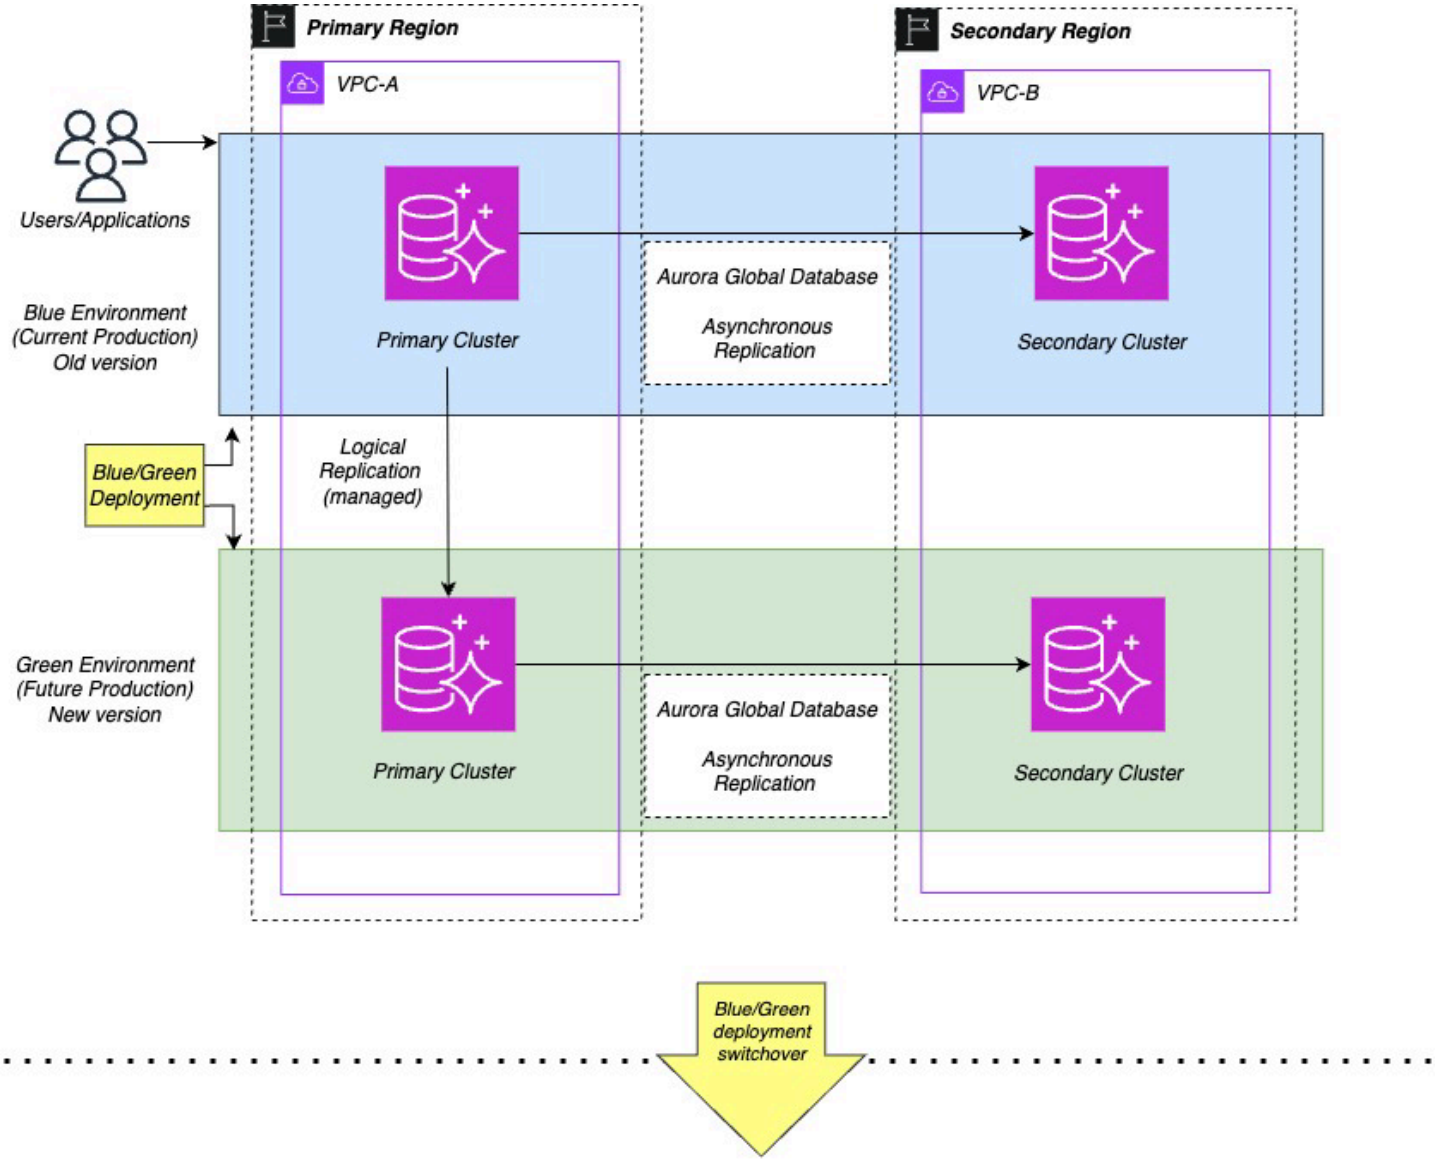
Primary Region
VPC-A
Secondary Region
VPC-B
Users/Applications
Blue Environment
(Current Production)
Old version
Primary Cluster
Aurora Global Database
Asynchronous
Replication
Secondary Cluster
Blue/Green
Deployment
Logical
Replication
(managed)
Green Environment
(Future Production)
New version
Primary Cluster
Aurora Global Database
Asynchronous
Replication
Secondary Cluster

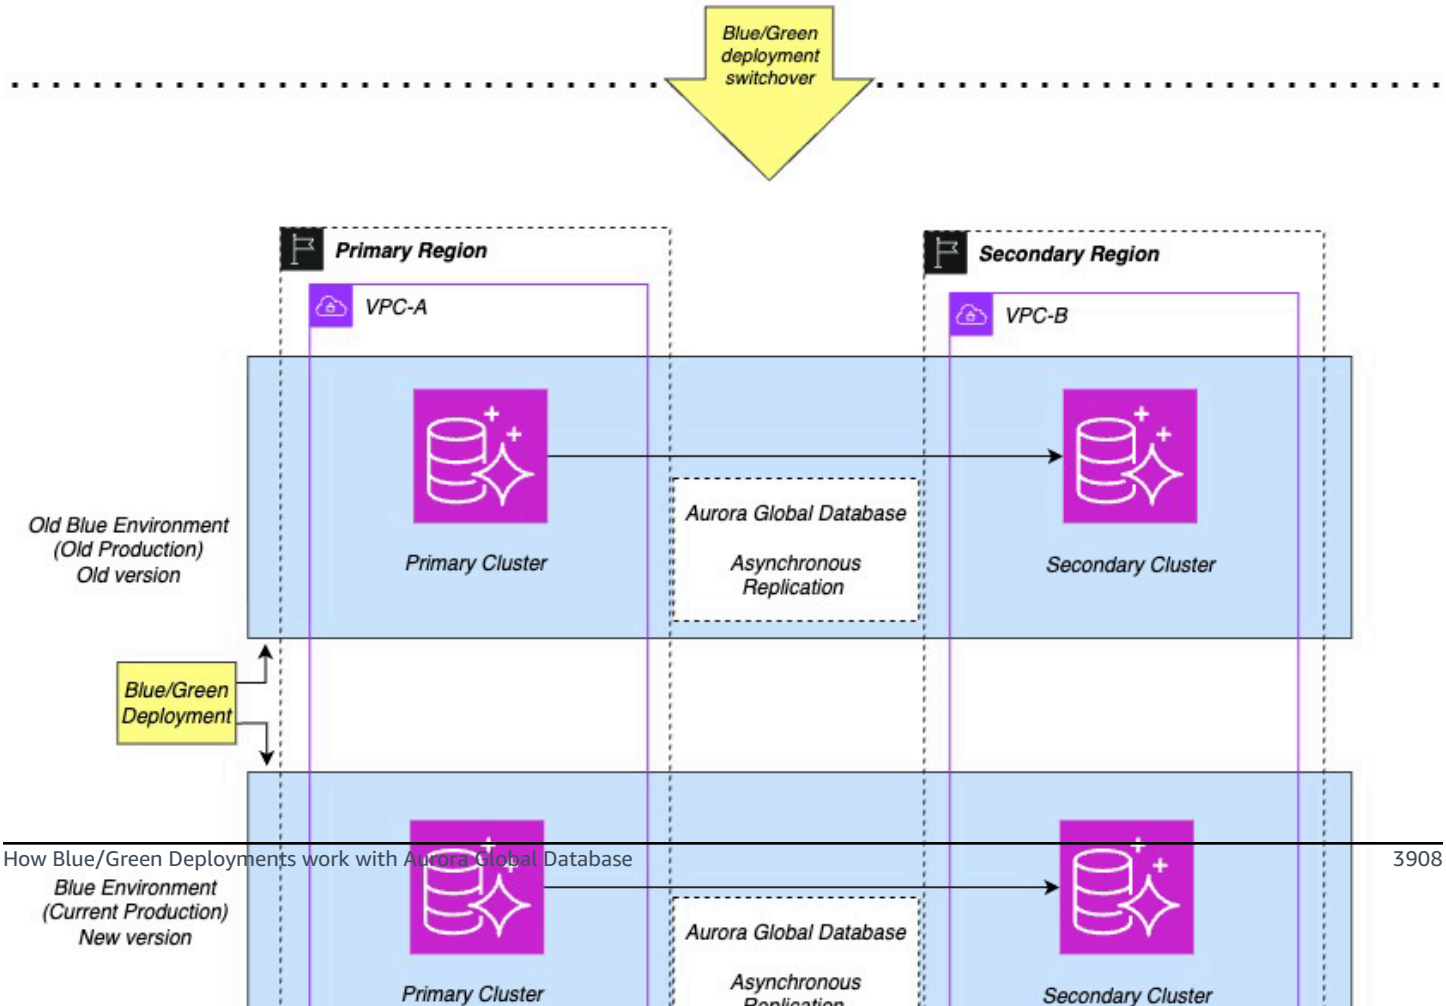
Blue/Green
deployment
switchover
Primary Region
VPC-A
Secondary Region
VPC-B
Old Blue Environment
(Old Production)
Old version
Primary Cluster
Aurora Global Database
Asynchronous
Replication
Secondary Cluster
Blue/Green
Deployment
Blue Environment
(Current Production)
New version
Primary Cluster
Aurora Global Database
Asynchronous
Replication
Secondary Cluster

You can create a blue/green deployment from the primary Region of your Global Database. Select the engine configurations such as major or minor Engine version, DB Parameter group, and DB cluster Parameter group for the green environment. Amazon RDS copies the blue environment's topology for the green environment. A visual representation in Amazon Web Services Management Console is as shown below.

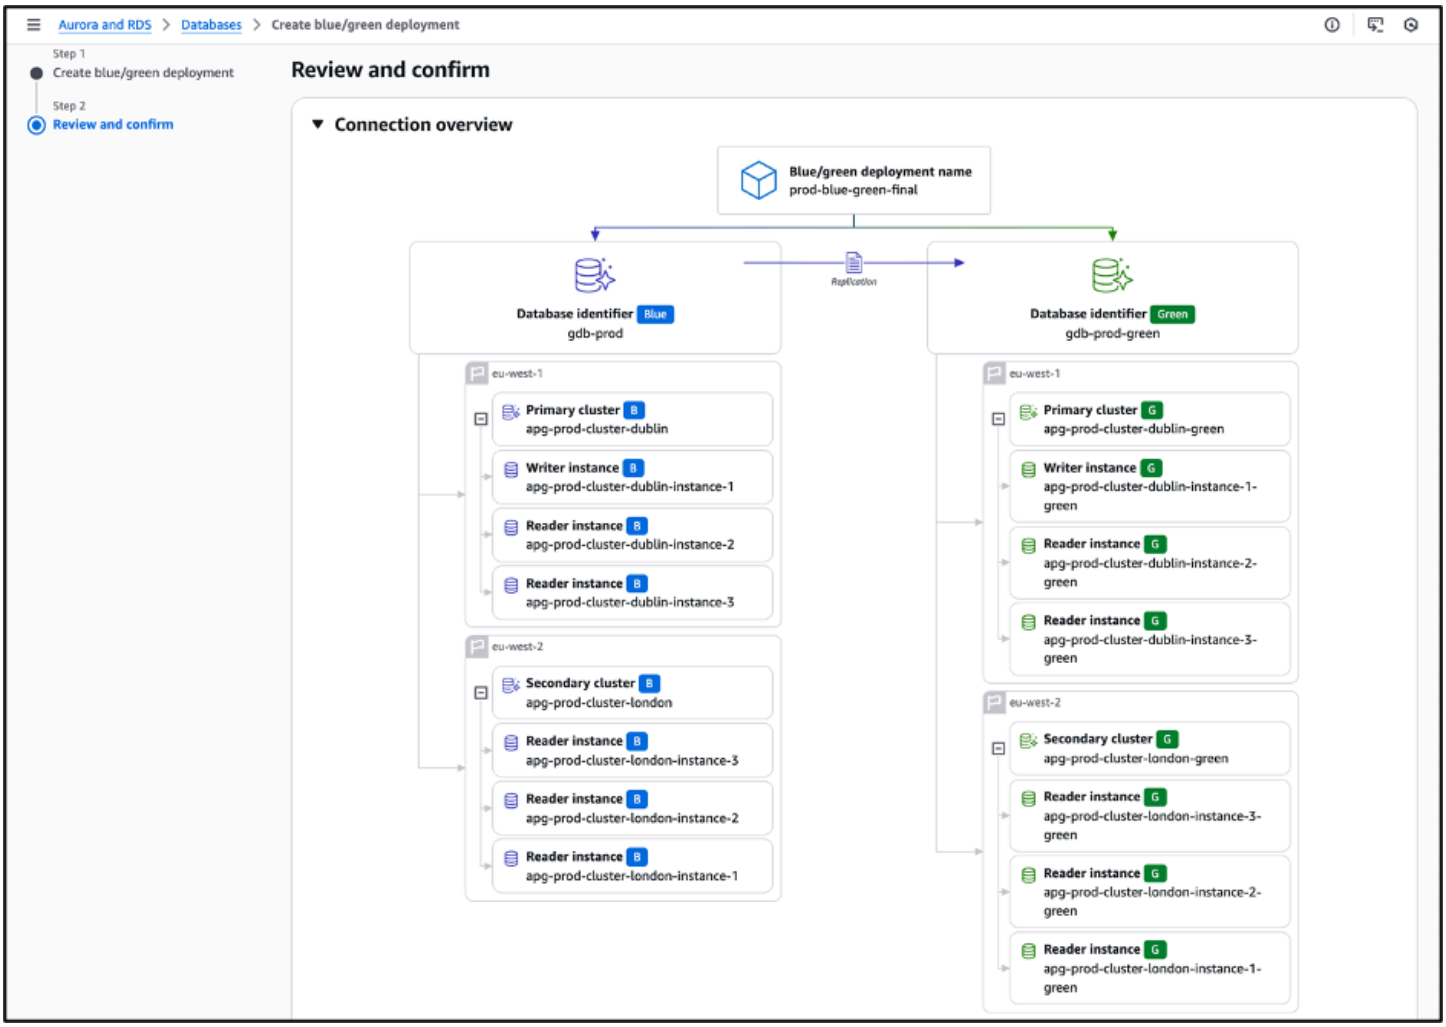

> **Note**
>
> Global failover is supported during a blue/green switchover, but Global switchover is not supported during a blue/green switchover.

When you initiate a global failover during an RDS blue/green switchover, the target region automatically rolls back to the blue environment or rolls forward to the green environment before the global failover occurs.

For information on creating, viewing, switching, and deleting blue/green deployments, see Using Amazon Aurora Blue/Green Deployments for database updates. Follow the same workflow for Global Databases, with specific instructions noted in the relevant steps.

Using Amazon Aurora global databases with other Amazon services

You can use your Aurora global databases with other Amazon services, such as Amazon S3 and Amazon Lambda. Doing so requires that all Aurora DB clusters in your global database have the same privileges, external functions, and so on in the respective Amazon Web Services Regions. Because a read-only Aurora secondary DB cluster in an Aurora global database can be promoted to the role of primary, we recommend that you set up write privileges ahead of time, on all Aurora DB clusters for any services you plan to use with your Aurora global database.

The following procedures summarize the actions to take for each Amazon Web Services service.

To invoke Amazon Lambda functions from an Aurora global database

1. For all the Aurora clusters that make up the Aurora global database, perform the procedures in Invoking a Lambda function from an Amazon Aurora MySQL DB cluster.
2. For each cluster in the Aurora global database, set the (ARN) of the new IAM (IAM) role.
3. To permit database users in an Aurora global database to invoke Lambda functions, associate the role that you created in Creating an IAM role to allow Amazon Aurora to access Amazon services with each cluster in the Aurora global database.
4. Configure each cluster in the Aurora global database to allow outbound connections to Lambda. For instructions, see Enabling network communication from Amazon Aurora to other Amazon services.

To load data from Amazon S3

1. For all the Aurora clusters that make up the Aurora global database, perform the procedures in Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket.
2. For each Aurora cluster in the global database, set either the `aurora_load_from_s3_role` or `aws_default_s3_role` DB cluster parameter to the Amazon Resource Name (ARN) of the

new IAM role. If an IAM role isn't specified for `aurora_load_from_s3_role`, Aurora uses the IAM role specified in `aws_default_s3_role`.

3. To permit database users in an Aurora global database to access S3, associate the role that you created in Creating an IAM role to allow Amazon Aurora to access Amazon services with each Aurora cluster in the global database.
4. Configure each Aurora cluster in the global database to allow outbound connections to S3. For instructions, see Enabling network communication from Amazon Aurora to other Amazon services.

To save queried data to Amazon S3

1. For all the Aurora clusters that make up the Aurora global database, perform the procedures in Saving data from an Amazon Aurora MySQL DB cluster into text files in an Amazon S3 bucket or Exporting data from an Aurora PostgreSQL DB cluster to Amazon S3.
2. For each Aurora cluster in the global database, set either the `aurora_select_into_s3_role` or `aws_default_s3_role` DB cluster parameter to the Amazon Resource Name (ARN) of the new IAM role. If an IAM role isn't specified for `aurora_select_into_s3_role`, Aurora uses the IAM role specified in `aws_default_s3_role`.
3. To permit database users in an Aurora global database to access S3, associate the role that you created in Creating an IAM role to allow Amazon Aurora to access Amazon services with each Aurora cluster in the global database.
4. Configure each Aurora cluster in the global database to allow outbound connections to S3. For instructions, see Enabling network communication from Amazon Aurora to other Amazon services.

Using Amazon Application Recovery Controller (ARC) with Aurora Global Database

When planning your business continuity and disaster recovery strategy, you need to orchestrate recovery across application stacks and their dependencies. Amazon Application Recovery Controller (ARC) integrates with Aurora Global Database to automate this process through ARC Region Switch, a centralized solution for automated multi-Region application recovery. Region Switch orchestrates failover steps across Amazon accounts and Regions, provides real-time recovery

dashboards, and generates compliance reports by aggregating data across resources and accounts. Learn more about using Region Switch for Aurora Global Database.

Upgrading an Amazon Aurora global database

Upgrading an Aurora global database follows the same procedures as upgrading Aurora DB clusters. However, following are some important differences to take note of before you start the process.

We recommend that you upgrade the primary and secondary DB clusters to the same version. You can only perform a managed cross-Region database failover on an Aurora global database if the primary and secondary DB clusters have the same major, minor, and patch level engine versions. However, the patch levels can be different, depending on the minor engine version. For more information, see Patch level compatibility for managed cross-Region switchovers and failovers.

Major version upgrades

When you perform a major version upgrade of an Amazon Aurora global database, you upgrade the global database cluster instead the individual clusters that it contains.

To learn how to upgrade an Aurora PostgreSQL global database to a higher major version, see Major upgrades for global databases.

> **Note**
>
> With an Aurora global database based on Aurora PostgreSQL, you can't perform a major version upgrade of the Aurora DB engine if the recovery point objective (RPO) feature is turned on. For information about the RPO feature, see Managing RPOs for Aurora PostgreSQL–based global databases.

To learn how to upgrade an Aurora MySQL global database to a higher major version, see In-place major upgrades for global databases.

> **Note**
>
> With an Aurora global database based on Aurora MySQL, you can perform an in-place upgrade from Aurora MySQL version 2 to version 3 only if you set the `lower_case_table_names` parameter to default and you reboot your global database.

To perform a major version upgrade to Aurora MySQL version 3 when using `lower_case_table_names`, use the following process:

1. Remove all secondary Regions from the global cluster. Follow the steps in Removing a cluster from an Amazon Aurora global database.
2. Upgrade the engine version of the primary Region to Aurora MySQL version 3. Follow the steps in How to perform an in-place upgrade.
3. Add secondary Regions to the global cluster. Follow the steps in Adding an Amazon Web Services Region to an Amazon Aurora global database.

You can also use the snapshot restore method instead. For more information, see Restoring from a DB cluster snapshot.

Minor version upgrades

You can upgrade your Aurora global database to a newer minor engine version across all regions with a single managed operation and minimal downtime, eliminating the need to manually upgrade each cluster individually and reducing operational overhead for global cluster management.

Understanding global database minor version upgrades

You can upgrade the minor version of your global database through the RDS API, Amazon CLI, or Amazon Web Services Management Console. This single operation orchestrates the upgrade across your primary cluster and all secondary (mirror) clusters. If issues occur during the upgrade, the service automatically rolls back to the existing version.

Note

This managed capability is currently supported only for Aurora PostgreSQL-compatible engines.

When you initiate a global database minor version upgrade using the `modify-global-cluster` command, you specify the target engine version, and the service coordinates the upgrade across all clusters. This upgrade is applied immediately.

For Linux, macOS, or Unix:

```
aws rds modify-global-cluster \
    --global-cluster-identifier global_cluster_identifier \
    --engine-version target_engine_version
```

For Windows:

```
aws rds modify-global-cluster ^
    --global-cluster-identifier global_cluster_identifier ^
    --engine-version target_engine_version
```

Considerations for minor version upgrades

When planning a minor version upgrade for your global database, consider the following:

- The managed capability applies only to minor version upgrades. Patch version upgrades continue to use existing system-update maintenance actions.
- The managed capability is supported only for Aurora PostgreSQL global clusters.

You can upgrade each cluster in your global cluster topology individually. If you choose this approach, upgrade all secondary clusters before upgrading the primary cluster. When upgrading, ensure your primary and secondary DB clusters are upgraded to the same minor version and patch level. To update the patch level, apply all pending maintenance actions on the secondary cluster. To learn how to upgrade an Aurora PostgreSQL global database to a higher minor version, see How to perform minor version upgrades and apply patches.

Minor version upgrades for Aurora MySQL global database

To learn how to upgrade an Aurora MySQL global database to a higher minor version, see Upgrading Aurora MySQL by modifying the engine version.

Before you perform the upgrade, review the following considerations:

- Upgrading the minor version of a secondary cluster doesn't affect availability or usage of the primary cluster in any way.
- A secondary cluster must have at least one DB instance to perform a minor upgrade.
- If you upgrade an Aurora MySQL global database to version 2.11.*, you must upgrade your primary and secondary DB clusters to exactly the same version, including the patch level.

- To support managed cross-Region switchovers or failovers, you might need to upgrade your primary and secondary DB clusters to the exact same version, including the patch level. This requirement applies to Aurora MySQL and some Aurora PostgreSQL versions. For a list of versions that allow switchovers and failovers between clusters running different patch levels, see Patch level compatibility for managed cross-Region switchovers and failovers.

Patch level compatibility for managed cross-Region switchovers and failovers

If your Aurora Global Database is running one of the following minor engine versions, you can perform managed cross-Region switchovers or failovers even if the patch levels of your primary and secondary DB clusters don't match. For minor engine versions lower than the ones on this list, your primary and secondary DB clusters must be running the same major, minor, and patch levels to perform managed cross-Region switchovers or failovers. Make sure to review the version information and the notes in the following table when planning upgrades for your primary cluster, secondary clusters, or both.


> **Note**
>
> For manual cross-Region failovers, you can perform the failover process as long as the target secondary DB cluster is running the same major and minor engine version as the primary DB cluster. In this case, the patch levels don't need to match.
> If your engine versions require identical patch levels, you can perform the failover manually by following the steps in Performing manual failovers for Aurora global databases.

Database engine	Minor engine versions	Notes
Aurora MySQL	No minor versions	None of the Aurora MySQL minor versions allow managed cross-Region switchovers or failovers with differing patch levels between the primary and secondary DB clusters.
Aurora PostgreSQL	• Version 15 or higher major versions	With the engine versions listed in the previous column, you can perform managed cross-Region

Database engine	Minor engine versions	Notes
	• Version 14.5 or higher minor versions • Version 13.8 or higher minor versions • Version 12.12 or higher minor versions • Version 11.17 or higher minor versions	switchovers or failovers from a primary DB cluster with one patch level to a secondary DB cluster with a different patch level. With minor versions lower than these, you can perform managed cross-Region switchovers or failovers only if the patch levels of the primary and secondary DB clusters match. **Warning** When you update a cluster in your global database to any of the following patch versions, you won't be able to perform cross-Region switchovers or failovers until all of the clusters in your global database are running one of these patch versions or a newer one. • Patch versions 16.1.6, 16.2.4, 16.3.2, and 16.4.2 • Patch versions 15.3.8, 15.4.9, 15.5.6, 15.6.4, 15.7.2, and 15.8.2 • Patch versions 14.8.8, 14.9.9, 14.10.6, 14.11.4, 14.12.2, and 14.13.2


Amazon RDS Proxy for Aurora

By using Amazon RDS Proxy, you can allow your applications to pool and share database connections to improve their ability to scale. RDS Proxy makes applications more resilient to database failures by automatically connecting to a standby DB instance while preserving application connections. By using RDS Proxy, you can enforce Amazon Identity and Access Management (IAM) authentication for clients connecting to the proxy, and the proxy can connect to databases using either IAM database authentication or credentials stored in Amazon Secrets Manager.

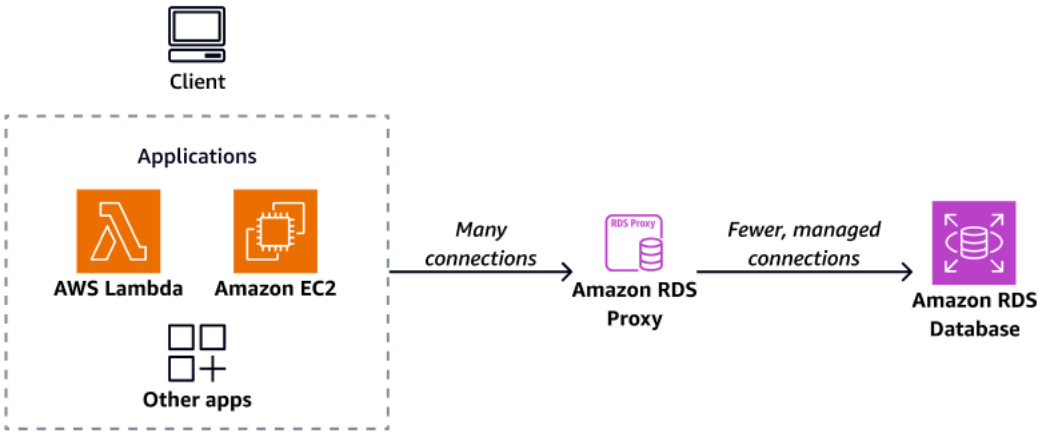

Using RDS Proxy, you can handle unpredictable surges in database traffic. Otherwise, these surges might cause issues due to oversubscribing connections or new connections being created at a fast rate. RDS Proxy establishes a database connection pool and reuses connections in this pool. This approach avoids the memory and CPU overhead of opening a new database connection each time. To protect a database against oversubscription, you can control the number of database connections that are created.

RDS Proxy queues or throttles application connections that can't be served immediately from the connection pool. Although latencies might increase, your application can continue to scale without abruptly failing or overwhelming the database. If connection requests exceed the limits you specify, RDS Proxy rejects application connections (that is, it sheds load). At the same time, it maintains predictable performance for the load that RDS can serve with the available capacity.

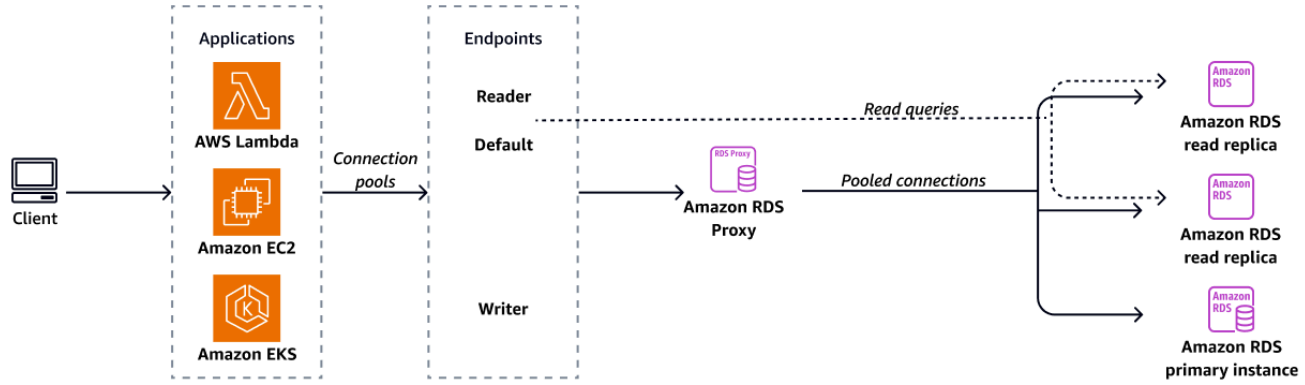

You can reduce the overhead to process credentials and establish a secure connection for each new connection. RDS Proxy can handle some of that work on behalf of the database.

RDS Proxy is fully compatible with the engine versions that it supports. You can enable RDS Proxy for most applications with no code changes. For a list of supported engine versions, see Supported Regions and Aurora DB engines for Amazon RDS Proxy.

For information about connection management, failover, and monitoring when you use RDS Proxy, see Best practices with RDS Proxy.

Topics

- Region and version availability
- Quotas and limitations for RDS Proxy
- Planning where to use RDS Proxy
- RDS Proxy concepts and terminology
- Getting started with RDS Proxy
- Managing an RDS Proxy
- Working with Amazon RDS Proxy endpoints
- Monitoring RDS Proxy metrics with Amazon CloudWatch
- Working with RDS Proxy events
- RDS Proxy command-line examples
- Troubleshooting for RDS Proxy
- Using RDS Proxy with Amazon CloudFormation
- Using RDS Proxy with Blue/Green Deployments

- Using RDS Proxy with Aurora global databases
- Best practices with RDS Proxy

Region and version availability

For information about database engine version support and availability of RDS Proxy in a given Amazon Web Services Region, see Supported Regions and Aurora DB engines for Amazon RDS Proxy.

Quotas and limitations for RDS Proxy

The following quotas and limitations apply to RDS Proxy:

- Each Amazon Web Services account ID is limited to 20 proxies. If your application requires more proxies, request an increase via the **Service Quotas** page within the Amazon Web Services Management Console. In the **Service Quotas** page, select **Amazon Relational Database Service (Amazon RDS)** and locate **Proxies** to request a quota increase. Amazon can automatically increase your quota or pending review of your request by Amazon Web Services Support.
- Each proxy can have up to 200 associated Secrets Manager secrets, thus limiting connections to up to 200 different user accounts when using secrets.
- Each proxy has a default endpoint which is provisioned across only two Availability Zones selected from the proxy's configured subnets. If subnets in more than two AZs are configured, any two will be selected.
- You can add up to 20 additional proxy endpoints for each proxy. These additional endpoints are provisioned across all the Availability Zones specified during their creation. You can create, view, modify, and delete these endpoints.
- In an Aurora cluster, all of the connections using the default proxy endpoint are handled by the Aurora writer instance. To perform load balancing for read-intensive workloads, you can create a read-only endpoint for a proxy. That endpoint passes connections to the reader endpoint of the cluster. That way, your proxy connections can take advantage of Aurora read scalability. For more information, see Overview of proxy endpoints.
- You can use RDS Proxy with Aurora serverless clusters, but not with Aurora Serverless v1 clusters.
- Your RDS Proxy must be in the same virtual private cloud (VPC) as the database. The proxy can't be publicly accessible, although the database can be. For example, if you're prototyping

your database on a local host, you can't connect to your proxy unless you set up the necessary network requirements to allow connection to the proxy. This is because your local host is outside of the proxy's VPC.

> **Note**
>
> For Aurora DB clusters, you can turn on cross-VPC access. To do this, create an additional endpoint for a proxy and specify a different VPC, subnets, and security groups with that endpoint. For more information, see Accessing Aurora databases across VPCs.

- You can't use RDS Proxy with a VPC that has its tenancy set to `dedicated`.
- You can't use RDS Proxy in a VPC that has encryption controls with `Enforce Mode` enabled.
- For IPv6 endpoint network types, configure your VPC and subnets to support only IPv6. For both IPv4 and IPv6 target connection network types, configure your VPC and subnets to support dual-stack mode.
- If you use RDS Proxy with an Aurora DB cluster that has IAM authentication enabled, the proxy can connect to the database using either IAM authentication or credentials stored in Secrets Manager. Clients connecting to the proxy must authenticate using IAM credentials. For detailed configuration instructions, see Setting up database credentials for RDS Proxy and Configuring IAM authentication for RDS Proxy
- You can't use RDS Proxy with custom DNS when using SSL hostname validation.
- Each proxy can be associated with a single target DB cluster. However, you can associate multiple proxies with the same DB cluster.
- Any statement with a text size greater than 16 KB causes the proxy to pin the session to the current connection.
- Certain Regions have Availability-Zone (AZ) restrictions to consider while creating your proxy. US East (N. Virginia) Region does not support RDS Proxy in the `use1-az3` Availability Zone. US West (N. California) Region does not support RDS Proxy in the `usw1-az2` Availability Zone. When selecting subnets while creating your proxy, make sure that you don't select subnets in the Availability Zones mentioned above.
- Currently, RDS Proxy doesn't support any global condition context keys.

  For more information about global condition context keys, see Amazon global condition context keys in the *IAM User Guide*.
- You can't use RDS Proxy with RDS Custom for SQL Server.

- To reflect any database parameter group modification to your proxy, an instance reboot is required even if your chose to apply your changes immediately. For cluster-level parameters, a cluster-wide reboot is required.
- Your proxy automatically creates the `rdsproxyadmin` DB user when you register a proxy target. This is a protected user that is essential for proxy functionality. You should avoid tampering with the `rdsproxyadmin` user in any capacity. Deleting or modifying the `rdsproxyadmin` user or its permissions can result in complete unavailability of the proxy to your application.

  Starting in Aurora MySQL version 8.4.7, the database engine enforces this protection. Attempts to `CREATE`, `DROP`, `RENAME`, `GRANT`, `REVOKE`, or `SET PASSWORD` for `rdsproxyadmin` return an error. For details, see Reserved users in Aurora MySQL.

For additional limitations for each DB engine, see the following sections:

- Additional limitations for Aurora MySQL
- Additional limitations for Aurora PostgreSQL

Additional limitations for Aurora MySQL

The following additional limitations apply to RDS Proxy with Aurora MySQL databases:

- RDS Proxy support for `caching_sha2_password` authentication requires a secure (TLS) connection.
- RDS Proxy support for `caching_sha2_password` is known to have compatibility issues with certain go-sql driver versions.
- When using the MySQL 8.4 C driver, the `mysql_stmt_bind_named_param` API might form malformed packets if parameter count exceeds placeholder count in a prepared statements. This results in incorrect responses. For more information, see MySQL bug report.
- Currently, all proxies listen on port 3306 for MySQL. The proxies still connect to your database using the port that you specified in the database settings.
- You can't use RDS Proxy with self-managed MySQL databases in EC2 instances.
- You can't use RDS Proxy with an RDS for MySQL DB instance that has the `read_only` parameter in its DB parameter group set to 1.
- RDS Proxy doesn't support MySQL compressed mode. For example, it doesn't support the compression used by the `--compress` or `-C` options of the `mysql` command.

- Database connections processing a `GET DIAGNOSTIC` command might return inaccurate information when RDS Proxy reuses the same database connection to run another query. This can happen when RDS Proxy multiplexes database connections.
- Some SQL statements and functions such as `SET LOCAL` can change the connection state without causing pinning. For the most current pinning behavior, see Avoiding pinning an RDS Proxy.
- Using the `ROW_COUNT()` function in a multi-statement query is not supported.
- RDS Proxy does not support client applications that can't handle multiple response messages in one TLS record.
- RDS Proxy does not support the MySQL dual passwords.
- RDS Proxy might not work as expected when you configure the `init_connect` parameter in your RDS DB parameter group to set session state variables. Instead, set the initialization query for your proxy to run session initialization statements when using proxy to connect to your database.

> **Important**
>
> For proxies associated with MySQL databases, don't set the configuration parameter `sql_auto_is_null` to `true` or a nonzero value in the initialization query. Doing so might cause incorrect application behavior.

Additional limitations for Aurora PostgreSQL

The following additional limitations apply to RDS Proxy with Aurora PostgreSQL databases:

- RDS Proxy doesn't support session pinning filters for PostgreSQL.
- Currently, all proxies listen on port 5432 for PostgreSQL.
- For PostgreSQL, RDS Proxy doesn't currently support canceling a query from a client by issuing a `CancelRequest`. This is the case, for example, when you cancel a long-running query in an interactive psql session by using Ctrl+C.
- The results of the PostgreSQL function lastval aren't always accurate. As a work-around, use the INSERT statement with the `RETURNING` clause.
- RDS Proxy currently doesn't support streaming replication mode.
- RDS Proxy doesn't support direct SSL negotiation mode.

- RDS Proxy only supports version 3.0 of the PostgreSQL messaging protocol.
- The default `postgres` database must exist on the RDS for PostgreSQL instance for RDS Proxy to function. Don't delete this database even if your application uses different databases.
- If you use `ALTER ROLE` to change the user role with `SET ROLE`, subsequent connections as that user to the proxy might not use this role setting, if those connections encounter pinning. To prevent this, when using proxy, use `SET ROLE` in the initialization query of the proxy. For more information, see **Initialization query** in Creating a proxy for Amazon Aurora.

> **Important**
>
> For existing proxies with PostgreSQL databases, if you modify the database authentication to use `SCRAM` only, the proxy becomes unavailable for up to 60 seconds. To avoid the issue, do one of the following:
>
> - Ensure that the database allows both `SCRAM` and `MD5` authentication.
> - To use only `SCRAM` authentication, create a new proxy, migrate your application traffic to the new proxy, then delete the proxy previously associated with the database.

Planning where to use RDS Proxy

You can determine which of your DB instances, clusters, and applications might benefit the most from using RDS Proxy. To do so, consider these factors:

- Any DB cluster that encounters "too many connections" errors is a good candidate for associating with a proxy. This is often characterized by a high value of the `ConnectionAttempts` CloudWatch metric. The proxy enables applications to open many client connections, while the proxy manages a smaller number of long-lived connections to the DB cluster.
- For DB clusters that use smaller Amazon instance classes, such as T2 or T3, using a proxy can help avoid out-of-memory conditions. It can also help reduce the CPU overhead for establishing connections. These conditions can occur when dealing with large numbers of connections.
- You can monitor certain Amazon CloudWatch metrics to determine whether a DB cluster is approaching certain types of limit. These limits are for the number of connections and the memory associated with connection management. You can also monitor certain CloudWatch metrics to determine whether a DB cluster is handling many short-lived connections. Opening and closing such connections can impose performance overhead on your database. For

information about the metrics to monitor, see Monitoring RDS Proxy metrics with Amazon CloudWatch.

- Amazon Lambda functions can also be good candidates for using a proxy. These functions make frequent short database connections that benefit from connection pooling offered by RDS Proxy. You can take advantage of any IAM authentication you already have for Lambda functions, instead of managing database credentials in your Lambda application code.
- Applications that typically open and close large numbers of database connections and don't have built-in connection pooling mechanisms are good candidates for using a proxy.
- Applications that keep a large number of connections open for long periods are typically good candidates for using a proxy. Applications in industries such as software as a service (SaaS) or ecommerce often minimize the latency for database requests by leaving connections open. With RDS Proxy, an application can keep more connections open than it can when connecting directly to the DB cluster.
- You might not have adopted IAM authentication and Secrets Manager due to the complexity of setting up such authentication for all DB clusters. The proxy can enforce the authentication policies for client connections for particular applications. You can take advantage of any IAM authentication you already have for Lambda functions, instead of managing database credentials in your Lambda application code.
- RDS Proxy can help make applications more resilient and transparent to database failures. RDS Proxy bypasses Domain Name System (DNS) caches to reduce failover times by up to 66% for Aurora Multi-AZ databases. RDS Proxy also automatically routes traffic to a new database instance while preserving application connections. This makes failovers more transparent for applications.
- When updating your databases using Blue/Green Deployments, you can use RDS Proxy to minimize switchover downtime. During switchover, RDS Proxy maintains awareness of the transition and automatically redirects connections to the Green environment once it becomes the new production environment, eliminating DNS propagation delays.

RDS Proxy concepts and terminology

You can simplify connection management for your Amazon Aurora DB clusters by using RDS Proxy.

RDS Proxy handles the network traffic between the client application and the database. It does so in an active way first by understanding the database protocol. It then adjusts its behavior based on the SQL operations from your application and the result sets from the database.

RDS Proxy reduces the memory and CPU overhead for connection management on your database. The database needs less memory and CPU resources when applications open many simultaneous connections. It also doesn't require logic in your applications to close and reopen connections that stay idle for a long time. Similarly, it requires less application logic to reestablish connections in case of a database problem.

The infrastructure for RDS Proxy is highly available and deployed over multiple Availability Zones (AZs). The computation, memory, and storage for RDS Proxy are independent of your Aurora DB cluster. This separation helps lower overhead on your database servers, so that they can devote their resources to serving database workloads. The RDS Proxy compute resources are serverless, automatically scaling based on your database workload.

Topics

- Overview of RDS Proxy concepts
- Connection pooling
- RDS Proxy security
- Failover
- Transactions

Overview of RDS Proxy concepts

RDS Proxy handles the infrastructure to perform connection pooling and the other features described in the sections that follow. You see the proxies represented in the RDS console on the **Proxies** page.

Each proxy handles connections to a single Aurora DB cluster. The proxy automatically determines the current writer instance for Aurora provisioned clusters.

The connections that a proxy keeps open and available for your database applications to use make up the *connection pool*.

By default, RDS Proxy can reuse a connection after each transaction in your session. This transaction-level reuse is called *multiplexing*. When RDS Proxy temporarily removes a connection from the connection pool to reuse it, that operation is called *borrowing* the connection. When it's safe to do so, RDS Proxy returns that connection to the connection pool.

In some cases, RDS Proxy can't be sure that it's safe to reuse a database connection outside of the current session. In these cases, it keeps the session on the same connection until the session ends. This fallback behavior is called *pinning*.

A proxy has a default endpoint. You connect to this endpoint when you work with an Amazon Aurora DB cluster. You do so instead of connecting to the read/write endpoint that connects directly to the cluster. The special-purpose endpoints for an Aurora cluster remain available for you to use. For Aurora DB clusters, you can also create additional read/write and read-only endpoints. For more information, see Overview of proxy endpoints.

For example, you can still connect to the cluster endpoint for read/write connections without connection pooling. You can still connect to the reader endpoint for load-balanced read-only connections. You can still connect to the instance endpoints for diagnosis and troubleshooting of specific DB instances within a cluster. If you use other Amazon services such as Amazon Lambda to connect to RDS databases, change their connection settings to use the proxy endpoint. For example, you specify the proxy endpoint to allow Lambda functions to access your database while taking advantage of RDS Proxy functionality.

Each proxy contains a target group. This *target group* embodies the Aurora DB cluster that the proxy can connect to. For an Aurora cluster, by default the target group is associated with all the DB instances in that cluster. That way, the proxy can connect to whichever Aurora DB instance is promoted to be the writer instance in the cluster. The Aurora DB cluster associated with a proxy are called the *targets* of that proxy. For convenience, when you create a proxy through the console, RDS Proxy also creates the corresponding target group and registers the associated targets automatically.

An *engine family* is a related set of database engines that use the same DB protocol. You choose the engine family for each proxy that you create.

Connection pooling

Each proxy performs connection pooling separately for the writer and reader instance of its associated Aurora DB. *Connection pooling* is an optimization that reduces the overhead associated with opening and closing connections and with keeping many connections open simultaneously. This overhead includes memory needed to handle each new connection. It also involves CPU overhead to close each connection and open a new one. Examples include Transport Layer Security/Secure Sockets Layer (TLS/SSL) handshaking, authentication, negotiating capabilities, and so on. Connection pooling simplifies your application logic. You don't need to write application code to minimize the number of simultaneous open connections.

Each proxy also performs connection multiplexing, also known as connection reuse. With *multiplexing*, RDS Proxy performs all the operations for a transaction using one underlying database connection. RDS then can use a different connection for the next transaction. You can open many simultaneous connections to the proxy, and the proxy keeps a smaller number of connections open to the DB instance or cluster. Doing so further minimizes the memory overhead for connections on the database server. This technique also reduces the chance of "too many connections" errors.

RDS Proxy security

RDS Proxy uses the existing RDS security mechanisms such as TLS/SSL and Amazon Identity and Access Management (IAM). For general information about those security features, see Security in Amazon Aurora. Also, make sure to familiarize yourself with how Aurora work with authentication, authorization, and other areas of security.

RDS Proxy can act as an additional layer of security between client applications and the underlying database. For example, you can connect to the proxy using TLS 1.3, even if the underlying DB instance supports an older version of TLS. You can connect to the proxy using an IAM role even if the proxy connects to the database using the database user and password authentication method. By using this technique, you can enforce strong authentication requirements for database applications without a costly migration effort for the DB instances themselves.

You can use the following methods of authentication with RDS Proxy:

- **Database credentials**
- **Standard IAM authentication**
- **End-to-end IAM authentication**

Using IAM with RDS Proxy

RDS Proxy offers two methods of IAM authentication:

- **Standard IAM authentication**: Enforce IAM authentication for connections to your proxy while the proxy connects to the database using credentials stored in Secrets Manager. This enforces IAM authentication for database access even if the databases use native password authentication. The proxy retrieves the database credentials from Secrets Manager and handles the authentication to the database on behalf of your application.

- **End-to-end IAM authentication**: Enforces IAM authentication for connections directly from your applications to your database through the proxy. End-to-end IAM authentication simplifies your security configuration and avoids database credential management in Secrets Manager. This additional layer of security enforces IAM-based access control from the client application to the database.

To use standard IAM authentication, configure your proxy to use Secrets Manager secrets for authentication and enable IAM authentication for client connections. Your applications authenticate to the proxy using IAM, while the proxy authenticates to the database using the credentials retrieved from Secrets Manager.

To use end-to-end IAM authentication, configure your proxy to use IAM authentication when setting the default authentication scheme when creating or modifying your proxy.

For end-to-end IAM authentication, you must update the IAM role associated with the proxy to grant the `rds-db:connect` permission. With end-to-end IAM authentication, this eliminates the need to register individual database users with the proxy through Secrets Manager secrets.

Using TLS/SSL with RDS Proxy

You can connect to RDS Proxy using the TLS/SSL protocol.

> **Note**
>
> RDS Proxy uses certificates from the Amazon Certificate Manager (ACM). If you are using RDS Proxy, you don't need to download Amazon RDS certificates or update applications that use RDS Proxy connections.

To enforce TLS for all connections between the proxy and your database, you can specify a setting **Require Transport Layer Security** when you create or modify a proxy in the Amazon Web Services Management Console.

RDS Proxy can also ensure that your session uses TLS/SSL between your client and the RDS Proxy endpoint. To have RDS Proxy do so, specify the requirement on the client side. SSL session variables are not set for SSL connections to a database using RDS Proxy.

- For Aurora MySQL, specify the requirement on the client side with the `--ssl-mode` parameter when you run the `mysql` command.

- For and Aurora PostgreSQL, specify `sslmode=require` as part of the `conninfo` string when you run the `psql` command.

RDS Proxy supports TLS protocol version 1.0, 1.1, 1.2, and 1.3. You can connect to the proxy using a higher version of TLS than you use in the underlying database.

By default, client programs establish an encrypted connection with RDS Proxy, with further control available through the `--ssl-mode` option. From the client side, RDS Proxy supports all SSL modes.

For the client, the SSL modes are the following:

PREFERRED

SSL is the first choice, but it isn't required.

DISABLED

No SSL is allowed.

REQUIRED

Enforce SSL.

VERIFY_CA

Enforce SSL and verify the certificate authority (CA).

VERIFY_IDENTITY

Enforce SSL and verify the CA and CA hostname.

When using a client with `--ssl-mode` `VERIFY_CA` or `VERIFY_IDENTITY`, specify the `--ssl-ca` option pointing to a CA in `.pem` format. For the `.pem` file to use, download all root CA PEMs from Amazon Trust Services and place them into a single `.pem` file.

RDS Proxy uses wildcard certificates, which apply to both a domain and its subdomains. If you use the `mysql` client to connect with SSL mode `VERIFY_IDENTITY`, currently you must use the MySQL 8.0-compatible `mysql` command.

Custom Cipher Suite Support in RDS Proxy

TLS cipher suites are standardized combinations of cryptographic algorithms used to secure client-server connections. They determine how encryption and data integrity are applied. In TLS 1.2

and earlier, they also specify key exchange and authentication methods. The final cipher suite is negotiated during the TLS handshake.

RDS/Aurora MySQL and MariaDB

Custom cipher suites can be configured through parameter groups using:

- `ssl_cipher` – for TLS 1.2 connections
- `tls_ciphersuites` – for TLS 1.3 connections

For cipher suites supported by the engines, see Configuring cipher suites for Aurora MySQL.

RDS/Aurora PostgreSQL

Custom cipher suites can be configured through parameter groups using:

- `ssl_ciphers` – for TLS 1.2 connections. In Aurora PostgreSQL 17, this can also include TLS 1.3 cipher suites.
- `ssl_tls13_ciphers` – for TLS 1.3 connections

For cipher suites supported by the engines, see Configuring cipher suites for RDS PostgreSQL and Configuring cipher suites for Aurora PostgreSQL.

Behavior with RDS Proxy

When using RDS Proxy, cipher suite settings configured on the database apply to connections between RDS Proxy and the database.

RDS Proxy also enforces the same allowlisted cipher suites for connections between your application and RDS Proxy. This ensures end-to-end enforcement of custom ciphers—from application to proxy to database—helping maintain consistent security standards across your environment.

RDS Proxy supports only a specific subset of cipher suites for TLS connections. Even if the database supports additional cipher suites, only the following cipher suites are supported by RDS Proxy. Enforcing other cipher suites on client connections to the proxy will cause failure in connection setup.

Cipher suites supported by RDS Proxy

#	TLS Version	Cipher in OpenSSL Format	Cipher in IANA Format
1	TLS 1.0, TLS 1.1, TLS 1.2	ECDHE-RSA-AES256-SHA	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA
2	TLS 1.0, TLS 1.1, TLS 1.2	DHE-RSA-AES256-SHA	TLS_DHE_RSA_WITH_AES_256_CBC_SHA
3	TLS 1.0, TLS 1.1, TLS 1.2	ECDHE-RSA-AES128-SHA	TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA
4	TLS 1.0, TLS 1.1, TLS 1.2	DHE-RSA-AES128-SHA	TLS_DHE_RSA_WITH_AES_128_CBC_SHA
5	TLS 1.2	ECDHE-RSA-AES256-GCM-SHA384	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384
6	TLS 1.2	DHE-RSA-AES256-GCM-SHA384	TLS_DHE_RSA_WITH_AES_256_GCM_SHA384
7	TLS 1.2	DHE-RSA-AES256-SHA256	TLS_DHE_RSA_WITH_AES_256_CBC_SHA256
8	TLS 1.2	ECDHE-RSA-AES128-GCM-SHA256	TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256
9	TLS 1.2	DHE-RSA-AES128-GCM-SHA256	TLS_DHE_RSA_WITH_AES_128_GCM_SHA256
10	TLS 1.2	DHE-RSA-AES128-SHA256	TLS_DHE_RSA_WITH_AES_128_CBC_SHA256
11	TLS 1.2	DHE-RSA-CHACHA20-POLY1305	TLS_DHE_RSA_WITH_CHACHA20_POLY1305_SHA256
12	TLS 1.3	TLS_AES_256_GCM_SHA384	TLS_AES_256_GCM_SHA384

#	TLS Version	Cipher in OpenSSL Format	Cipher in IANA Format
13	TLS 1.3	TLS_AES_128_GCM_SHA256	TLS_AES_128_GCM_SHA256

Hybrid Post-quantum Cryptography (ML-KEM) Support in RDS Proxy

TLS 1.3 supports hybrid post-quantum key exchange through named groups. These named groups combine the post-quantum key exchange algorithm ML-KEM with a classical Elliptic Curve Diffie-Hellman (ECDH) key exchange algorithm—such as `X25519MLKEM768` and `SecP256r1MLKEM768`.

RDS Proxy currently does not support hybrid post-quantum named groups. As a result, post-quantum key-exchange negotiation is not available for connections through RDS Proxy. It applies only to direct connections to your database.

When you connect through RDS Proxy:

- Clients that offer both post-quantum and classical key-exchange groups negotiate a classical group with RDS Proxy and connect successfully.
- Clients configured to offer only post-quantum key-exchange groups (with no classical fallback) cannot connect to RDS Proxy; the TLS handshake fails.

Failover

Failover is a high-availability feature that replaces a database instance with another one when the original instance becomes unavailable. A failover might happen because of a problem with a database instance. It might also be part of normal maintenance procedures, such as during a database upgrade. Failover applies to Aurora DB clusters with one or more reader instances in addition to the writer instance.

Connecting through a proxy makes your applications more resilient to database failovers. When the original DB instance becomes unavailable, RDS Proxy connects to the standby database without dropping idle application connections. This helps speed up and simplify the failover process. This is less disruptive to your application than a typical reboot or database problem.

Without RDS Proxy, a failover involves a brief outage. During the outage, you can't perform write operations on the database in failover. Any existing database connections are disrupted, and your

application must reopen them. The database becomes available for new connections and write operations when a read-only DB instance is promoted in place of one that's unavailable.

During DB failovers, RDS Proxy continues to accept connections at the same IP address and automatically directs connections to the new primary DB instance. Clients connecting through RDS Proxy are not susceptible to the following:

- Domain Name System (DNS) propagation delays on failover.
- Local DNS caching.
- Connection timeouts.
- Uncertainty about which DB instance is the current writer.
- Waiting for a query response from a former writer that became unavailable without closing connections.

For applications that maintain their own connection pool, going through RDS Proxy means that most connections stay alive during failovers or other disruptions. Only connections that are in the middle of a transaction or SQL statement are canceled. RDS Proxy immediately accepts new connections. When the database writer is unavailable, RDS Proxy queues up incoming requests.

For applications that don't maintain their own connection pools, RDS Proxy offers faster connection rates and more open connections. It offloads the expensive overhead of frequent reconnects from the database. It does so by reusing database connections maintained in the RDS Proxy connection pool. This approach is particularly important for TLS connections, where setup costs are significant.

Transactions

All the statements within a single transaction always use the same underlying database connection. The connection becomes available for use by a different session when the transaction ends. Using the transaction as the unit of granularity has the following consequences:

- Connection reuse can happen after each individual statement when the Aurora MySQL `autocommit` setting is turned on.
- Conversely, when the `autocommit` setting is turned off, the first statement you issue in a session begins a new transaction. For example, suppose that you enter a sequence of `SELECT`, `INSERT`, `UPDATE`, and other data manipulation language (DML) statements. In this case, connection reuse doesn't happen until you issue a `COMMIT`, `ROLLBACK`, or otherwise end the transaction.

- Entering a data definition language (DDL) statement causes the transaction to end after that statement completes.

RDS Proxy detects when a transaction ends through the network protocol used by the database client application. Transaction detection doesn't rely on keywords such as `COMMIT` or `ROLLBACK` appearing in the text of the SQL statement.

In some cases, RDS Proxy might detect a database request that makes it impractical to move your session to a different connection. In these cases, it turns off multiplexing for that connection the remainder of your session. The same rule applies if RDS Proxy can't be certain that multiplexing is practical for the session. This operation is called *pinning*. For ways to detect and minimize pinning, see Avoiding pinning an RDS Proxy.

Getting started with RDS Proxy

Use the information in the following pages to set up and manage Amazon RDS Proxy for Aurora and set related security options. The security options control who can access each proxy and how each proxy connects to DB instances.

If you're new to RDS Proxy, we recommend following the pages in the order that we present them.

Topics

- Setting up network prerequisites for RDS Proxy
- Setting up database credentials for RDS Proxy
- Configuring IAM authentication for RDS Proxy
- Creating a proxy for Amazon Aurora
- Viewing a proxy
- Connecting to a database through RDS Proxy

Setting up network prerequisites for RDS Proxy

Using RDS Proxy requires you to have a common virtual private cloud (VPC) between your Aurora DB cluster and RDS Proxy. This VPC should have a minimum of two subnets that are in different Availability Zones. Your account can either own these subnets or share them with other accounts. For information about VPC sharing, see Work with shared VPCs.

For IPv6 support, additional network configuration is required:

- **IPv6 endpoint network types** – Your VPC and subnets must be configured to support IPv6. This includes having IPv6 CIDR blocks assigned to your VPC and subnets.
- **Dual-stack endpoint network types** – Your VPC and subnets must support both IPv4 and IPv6 addressing.
- **IPv6 target connection network types** – Your database must be configured for dual-stack mode to support IPv6 connections from the proxy.

Your client application resources such as Amazon EC2, Lambda, or Amazon ECS can be in the same VPC as the proxy. Or they can be in a separate VPC from the proxy. If you successfully connected to any Aurora DB clusters, you already have the required network resources.

Topics

- Getting information about your subnets
- Planning for IP address capacity

Getting information about your subnets

If you're just getting started with Aurora, you can learn the basics of connecting to a database by following the procedures in Setting up your environment for Amazon Aurora. You can also follow the tutorial in Getting started with Amazon Aurora.

To create a proxy, you must provide the subnets and the VPC that the proxy operates within. The following Linux example shows Amazon CLI commands that examine the VPCs and subnets owned by your Amazon Web Services account. In particular, you pass subnet IDs as parameters when you create a proxy using the CLI.

```
aws ec2 describe-vpcs
aws ec2 describe-internet-gateways
aws ec2 describe-subnets --query '*[].[VpcId,SubnetId]' --output text | sort
```

The following Linux example shows Amazon CLI commands to determine the subnet IDs corresponding to a specific Aurora DB cluster.

For an Aurora cluster, first you find the ID for one of the associated DB instances. You can extract the subnet IDs used by that DB instance. To do so, examine the nested fields within the

DBSubnetGroup and Subnets attributes in the describe output for the DB instance. You specify some or all of those subnet IDs when setting up a proxy for that database server.

```
$ # Find the ID of any DB instance in the cluster.
$  aws rds describe-db-clusters --db-cluster-identifier my_cluster_id --query '*[].
[DBClusterMembers]||[0]||[0][*].DBInstanceIdentifier' --output text
```

```
my_instance_id
instance_id_2
instance_id_3
```

After finding the DB instance identifier, examine the associated VPC to find its subnets. The following Linux example shows how.

```
$ #From the DB instance, trace through the DBSubnetGroup and Subnets to find the subnet
 IDs.
$ aws rds describe-db-instances --db-instance-identifier my_instance_id --query '*[].
[DBSubnetGroup]||[0]||[0]||[Subnets]||[0]||[*].SubnetIdentifier' --output text
```

```
subnet_id_1
subnet_id_2
subnet_id_3
...
```

```
$ #From the DB instance, find the VPC.
$ aws rds describe-db-instances --db-instance-identifier my_instance_id --query '*[].
[DBSubnetGroup]||[0]||[0].VpcId' --output text
```

```
my_vpc_id
```

```
$ aws ec2 describe-subnets --filters Name=vpc-id,Values=my_vpc_id --query '*[].
[SubnetId]' --output text
```

```
subnet_id_1
subnet_id_2
subnet_id_3
subnet_id_4
```

```
subnet_id_5
subnet_id_6
```

Planning for IP address capacity

RDS Proxy automatically adjusts its capacity based on the configuration of DB instances registered with it. For provisioned instances, this is determined by the instance size and for Aurora serverless instances, this is determined by the maximum ACU capacity. Certain operations might also require additional capacity such as increasing the size of a registered database or internal RDS Proxy maintenance operations. During these operations, your proxy might need more IP addresses to provision the extra capacity. These additional addresses allow your proxy to scale without affecting your workload. A lack of free IP addresses in your subnets prevents a proxy from scaling up. This can lead to higher query latencies or client connection failures. RDS notifies you through event `RDS-EVENT-0243` when there aren't enough free IP addresses in your subnets. For information about this event, see Working with RDS Proxy events.

Reserve the following minimum numbers of free IP addresses in your subnets for your proxy, based on DB instance class sizes.

DB instance class	Minimum free IP addresses
db.*.xlarge or smaller	10
db.*.2xlarge	15
db.*.4xlarge	25
db.*.8xlarge	45
db.*.12xlarge	60
db.*.16xlarge	75
db.*.24xlarge	110

For Aurora serverless, reserve the following minimum numbers of free IP addresses in your subnets for your proxy, based on maximum ACU capacity.

Maximum ACU Capacity	Minimum free IP addresses
16 or smaller	10
32	15
64	25
96	30
128	40
160	50
192	55
224	65
256	75

Note

RDS Proxy doesn't consume more than 215 IP addresses for each proxy in a VPC.

RDS Proxy requires a minimum of 10 IP addresses for your Aurora database. These recommended numbers of IP addresses are estimates for a proxy with only the default endpoint. For each additional custom endpoint, we recommend reserving three more IP addresses. For each Aurora reader instance, we recommend that you reserve additional IP addresses as specified in the table based on that reader's maximum ACUs for Aurora serverless target or DB instance size for a provisioned target.

To estimate the required IP addresses for a proxy that's associated with an Aurora DB cluster with:

- 1 provisioned writer instance of size `db.r5.8xlarge` and 1 provisioned reader instance of size `db.r5.2xlarge`.
- The proxy attached to this cluster has a default endpoint and a custom endpoint with the read-only role.

In this case, the proxy needs approximately 63 free IP addresses (45 for the writer instance, 15 for reader instance, and 3 for the additional custom endpoint).

To estimate the required IP addresses for a proxy that's associated with an Aurora DB cluster that has:

- 1 Aurora serverless writer instance with maximum capacity of 256 ACUs and 1 Aurora serverless reader instance with maximum capacity of 192 ACUs.
- The proxy that's attached to this cluster has the default endpoint and 1 custom endpoint with the read-only role.

In this case, the proxy needs approximately 133 free IP addresses (75 for the writer instance, 55 for reader instance, and 3 for the additional custom endpoint).

To estimate the required IP addresses for a proxy that's associated with an Aurora cluster that has:

- 1 provisioned writer instance with DB instance size of db.r5.4xlarge and 1 Aurora serverless reader instance with maximum capacity of 64 ACUs.
- The proxy that's attached to this cluster has the default endpoint and 1 custom endpoint with the read-only role.

In this case, the proxy needs approximately 53 free IP addresses (25 for the writer instance, 25 for reader instance, and 3 for the additional custom endpoint).

To estimate the required IP addresses for a proxy that's associated with an Aurora DB cluster that has:

- 1 provisioned writer instance of size db.r5.24xlarge and 3 provisioned reader instance of size db.r5.8xlarge.
- The proxy that's attached to this DB cluster has the default endpoint and 1 custom endpoint with the read-only role.

In this case, the proxy needs 215 free IP addresses. While calculations suggest 248 IPs (110 + (3*45) + 3), RDS Proxy doesn't consume more than 215 IP addresses for each proxy in a VPC.

Setting up database credentials for RDS Proxy

RDS Proxy in Amazon RDS uses Amazon Secrets Manager to store and manage database credentials securely. Instead of embedding credentials in your application, you associate a proxy with a Secrets Manager secret that contains the necessary authentication details. You create a separate Secrets Manager secret for each database user account that the proxy connects to on the Aurora DB cluster.

Alternatively, you can configure RDS Proxy to use end-to-end IAM authentication, which eliminates the need to store database credentials in Secrets Manager. RDS Proxy uses IAM authentication for both client-to-proxy and proxy-to-database connections. This provides a fully integrated IAM-based authentication solution that doesn't require managing secrets or passwords. For information about adding a new IAM DB user, see Creating a database account using IAM authentication.

Topics

- Creating secrets to use with RDS Proxy

Creating secrets to use with RDS Proxy

Before you create a proxy, you must first create at least one secret that stores your database credentials.

Console

To create a secret

1. Open the Secrets Manager console at https://console.amazonaws.cn/secretsmanager/.
2. Choose **Store a new secret**.
3. Choose **Credentials for Amazon RDS database**.
4. Enter a user name and password. The credentials that you enter must match the credentials of a database user that exists in the associated RDS database. RDS Proxy uses these credentials to authenticate and establish connections to the database on behalf of applications.

   If there's a mismatch, you can update the secret to match the database password. Until you update the secret, attempts to connect through the proxy using that secret fail, but connections using other valid secrets still work.

> **Note**
>
> For RDS for SQL Server, RDS Proxy requires a case-sensitive secret in Secrets Manager, regardless of the DB instance collation settings. If your application allows usernames with different capitalizations, such as "Admin" and "admin," you must create separate secrets for each. RDS Proxy doesn't support case-insensitive username authentication between the client and proxy.
> For more information about collation in SQL Server, see the Microsoft SQL Server documentation.

5. For **Database**, select the Amazon RDS database that the secret will access.
6. Fill in other settings for the secret, then choose **Store**. For comprehensive instructions, see Creating an Amazon Secrets Manager secret in the *Amazon Secrets Manager User Guide*.

Amazon CLI

When you create a proxy through the Amazon CLI, you specify the Amazon Resource Names (ARNs) of the corresponding secrets. You do so for all the DB user accounts that the proxy can access. In the Amazon Web Services Management Console, you choose the secrets by their descriptive names.

- To create a Secrets Manager secret for use with RDS Proxy, use the create-secret command:

```
aws secretsmanager create-secret \
  --name "secret_name" \
  --description "secret_description" \
  --region region_name \
  --secret-string '{"username":"db_user","password":"db_user_password"}'
```

- You can also create a custom key to encrypt your Secrets Manager secret. The following command creates an example key.

```
aws kms create-key --description "test-key" --policy '{
  "Id":"kms-policy",
  "Version": "2012-10-17",
  "Statement":
    [
      {
        "Sid":"Enable IAM User Permissions",
        "Effect":"Allow",
```

```
        "Principal":{"AWS":"arn:aws-cn:iam::account_id:root"},
        "Action":"kms:*","Resource":"*"
      },
      {
        "Sid":"Allow access for Key Administrators",
        "Effect":"Allow",
        "Principal":
          {
            "AWS":
              ["$USER_ARN","arn:aws-cn:iam::account_id:role/Admin"]
          },
        "Action":
          [
            "kms:Create*",
            "kms:Describe*",
            "kms:Enable*",
            "kms:List*",
            "kms:Put*",
            "kms:Update*",
            "kms:Revoke*",
            "kms:Disable*",
            "kms:Get*",
            "kms:Delete*",
            "kms:TagResource",
            "kms:UntagResource",
            "kms:ScheduleKeyDeletion",
            "kms:CancelKeyDeletion"
          ],
        "Resource":"*"
      },
      {
        "Sid":"Allow use of the key",
        "Effect":"Allow",
        "Principal":{"AWS":"$ROLE_ARN"},
        "Action":["kms:Decrypt","kms:DescribeKey"],
        "Resource":"*"
      }
    ]
}'
```

For example, the following commands create Secrets Manager secrets for two database users:

```
aws secretsmanager create-secret \
  --name secret_name_1 --description "db admin user" \
  --secret-string '{"username":"admin","password":"choose_your_own_password"}'

aws secretsmanager create-secret \
  --name secret_name_2 --description "application user" \
  --secret-string '{"username":"app-user","password":"choose_your_own_password"}'
```

To create these secrets encrypted with your custom Amazon KMS key, use the following commands:

```
aws secretsmanager create-secret \
  --name secret_name_1 --description "db admin user" \
  --secret-string '{"username":"admin","password":"choose_your_own_password"}' \
  --kms-key-id arn:aws-cn:kms:us-east-2:account_id:key/key_id

aws secretsmanager create-secret \
  --name secret_name_2 --description "application user" \
  --secret-string '{"username":"app-user","password":"choose_your_own_password"}' \
  --kms-key-id arn:aws-cn:kms:us-east-2:account_id:key/key_id
```

To see the secrets owned by your Amazon account, use the list-secrets command:

```
aws secretsmanager list-secrets
```

When you create a proxy using the CLI, you pass the Amazon Resource Names (ARNs) of one or more secrets to the `--auth` parameter. The following example shows how to prepare a report with only the name and ARN of each secret owned by your Amazon account. This example uses the `--output table` parameter that is available in Amazon CLI version 2. If you are using Amazon CLI version 1, use `--output text` instead.

```
aws secretsmanager list-secrets --query '*[].[Name,ARN]' --output table
```

To confirm that the secret contains the correct credentials in the proper format, use the get-secret-value command. Replace *your_secret_name* with the secret's short name or ARN.

```
aws secretsmanager get-secret-value --secret-id your_secret_name
```

The output contains a line with a JSON-encoded value similar to the following:

```
...
"SecretString": "{\"username\":\"your_username\",\"password\":\"your_password\"}",
...
```

Configuring IAM authentication for RDS Proxy

To set up Amazon Identity and Access Management (IAM) authentication for RDS Proxy in Amazon RDS, create and configure an IAM policy that grants the necessary permissions.

This topic provides the steps to configure IAM authentication for RDS Proxy, including creating the required IAM policy and attaching it to an IAM role.

> **Tip**
>
> This procedure is only necessary if you want to create your own IAM role. Otherwise, RDS can automatically create the required role when you set up the proxy, so you can skip these steps.

Prerequisites

Before you set up IAM authentication for RDS Proxy, make sure that you have the following:

- **Amazon Secrets Manager** – At least one stored secret that contains database credentials. For instructions to create secrets, see the section called "Setting up database credentials".

  This is not required if you are using end-to-end IAM authentication.
- **IAM permissions** – An IAM role or user with permissions to create and manage IAM policies, roles, and secrets in Amazon Secrets Manager.

Creating an IAM policy for end-to-end IAM authentication

When using end-to-end IAM authentication, RDS Proxy connects to your database using IAM authentication instead of retrieving credentials from Secrets Manager. This requires configuring your IAM role with `rds-db:connect` permissions for the database accounts you want to use with the proxy.

To authenticate your RDS Proxy to the database using IAM, create an IAM role with a policy that grants the necessary database connection permissions.

Console

To create a role for end-to-end IAM authentication with your proxy

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. Create a permissions policy for the role. For general steps, see Create IAM policies (console).

   Paste this policy into the JSON editor and make the following changes:

   - Substitute your own account ID.
   - Substitute `us-east-2` with the where the proxy must reside.
   - Substitute the database resource IDs and user names with the ones you want to use. The resource ID format differs between RDS instances and Aurora clusters.

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": "rds-db:connect",
            "Resource": [
                "arn:aws-cn:rds-db:us-
east-2:account_id:dbuser:db_instance_resource_id/db_user_name_1",
                "arn:aws-cn:rds-db:us-
east-2:account_id:dbuser:db_instance_resource_id/db_user_name_2"
            ]
        }
    ]
}
```

3. Create the role and attach the permissions policy to it. For general steps, see Create a role to delegate permissions to an Amazon service.

   For the **Trusted entity type**, choose **Amazon service**. Under **Use case**, select **RDS** and choose **RDS - Add Role to Database** for the use case.
4. For **Permissions policies**, choose the policy that you created.
5. For **Select trusted entities**, enter the following trust policy for the role:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": "rds.amazonaws.com"
      },
      "Action": "sts:AssumeRole"
    }
  ]
}
```

Amazon CLI

To create the role using the Amazon CLI, send the following request:

```
aws iam create-role \
  --role-name my_e2e_iam_role_name \

  --assume-role-policy-document '{"Version":"2012-10-17",
     "Statement":[{"Effect":"Allow","Principal":{"Service":
["rds.amazonaws.com"]},"Action":"sts:AssumeRole"}]}'
```

Then, attach the policy to the role:

```
aws iam put-role-policy \
  --role-name my_e2e_iam_role_name \
  --policy-name e2e_iam_db_connect_policy \
  --policy-document '{

    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": "rds-db:connect",
            "Resource": [
                "arn:aws-cn:rds-db:us-
east-2:account_id:dbuser:db_instance_resource_id/db_user_name_1",
```

```
                "arn:aws-cn:rds-db:us-
east-2:account_id:dbuser:db_instance_resource_id/db_user_name_2"
            ]
        }
    ]
}'
```

With the IAM role and permissions configured for end-to-end IAM authentication, you can now create a proxy with `DefaultAuthScheme` set to `IAM_AUTH`. This proxy directly authenticates to the database using IAM without requiring Secrets Manager secrets. For instructions, see the section called “Creating a proxy”.

When using end-to-end IAM authentication, ensure that your database users are configured for IAM authentication as described in Creating a database account using IAM authentication.

Creating an IAM policy for Secrets Manager access

To allow RDS Proxy to retrieve database credentials from Secrets Manager, create an IAM role with a policy that grants the necessary permissions.

Console

To create a role to access your secrets for use with your proxy

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. Create a permissions policy for the role. For general steps, see Create IAM policies (console).

   Paste this policy into the JSON editor and make the following changes:

   - Substitute your own account ID.
   - Substitute `us-east-2` with the Region where the proxy will reside.
   - Substitute the secret names with the ones you created. For more information, see Specifying KMS keys in IAM policy statements.
   - Substitue the KMS key ID with the one you used to encrypt the Secrets Manager secrets, either the default key or your own key.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": "secretsmanager:GetSecretValue",
            "Resource": [
                "arn:aws-cn:secretsmanager:us-
east-2:111122223333:secret:secret_name_1",
                "arn:aws-cn:secretsmanager:us-
east-2:111122223333:secret:secret_name_2"
            ]
        },
        {
            "Effect": "Allow",
            "Action": "kms:Decrypt",
            "Resource": "arn:aws-cn:kms:us-east-2:111122223333:key/key_id",
            "Condition": {
                "StringEquals": {
                    "kms:ViaService": "secretsmanager.us-
east-2.amazonaws.com"
                }
            }
        }
    ]
}
```

3. Create the role and attach the permissions policy to it. For general steps, see Create a role to delegate permissions to an Amazon service.

   For the **Trusted entity type**, choose **Amazon service**. Under **Use case**, select **RDS** and choose **RDS - Add Role to Database** for the use case.

4. For **Permissions policies**, choose the policy that you created.

5. For **Select trusted entities**, enter the following trust policy for the role:

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": "rds.amazonaws.com"
      },
      "Action": "sts:AssumeRole"
    }
  ]
}
```

Amazon CLI

To create the role using the Amazon CLI, send the following request:

```
aws iam create-role \
  --role-name my_role_name \
  --assume-role-policy-document '{"Version": "2012-10-17",
      "Statement":[{"Effect":"Allow","Principal":{"Service":
["rds.amazonaws.com"]},"Action":"sts:AssumeRole"}]}'
```

Then, attach the policy to the role:

```
aws iam put-role-policy \
  --role-name my_role_name \
  --policy-name secret_reader_policy \
  --policy-document '{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "VisualEditor0",
            "Effect": "Allow",
            "Action": "secretsmanager:GetSecretValue",
            "Resource": [
                "arn:aws-cn:secretsmanager:us-east-2:account_id:secret:secret_name_1",
```

```
                "arn:aws-cn:secretsmanager:us-east-2:account_id:secret:secret_name_2"
            ]
        },
        {
            "Sid": "VisualEditor1",
            "Effect": "Allow",
            "Action": "kms:Decrypt",
            "Resource": "arn:aws-cn:kms:us-east-2:account_id:key/key_id",
            "Condition": {
                "StringEquals": {
                    "kms:ViaService": "secretsmanager.us-east-2.amazonaws.com"
                }
            }
        }
    ]
}'
```

With the IAM role and permissions configured, you can now create a proxy and associate it with this role. This allows the proxy to retrieve database credentials securely from Amazon Secrets Manager and enable IAM authentication for your applications. For instructions, see the section called “Creating a proxy”.

Creating a proxy for Amazon Aurora

You can use Amazon RDS Proxy to improve the scalability, availability, and security of your database applications by pooling connections and managing database failovers more efficiently. This topic walks you through creating a proxy. Before you start, make sure your database meets the necessary prerequisites, including IAM permissions and VPC configuration.

You can associate a proxy with an Aurora MySQL or Aurora PostgreSQL DB cluster.

Console

To create a proxy

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Proxies**.
3. Choose **Create proxy**.
4. Configure the following settings for your proxy.

Setting	Description
Engine family	The database network protocol the proxy recognizes when it interprets network traffic to and from the database. **Note** To use Aurora PostgreSQL, make sure to retain the `postgres` database in your instance. See Troubleshooting deleted `postgres` database.
Proxy identifier	A name that is unique within your Amazon account ID and current Amazon Region.
Idle client connection timeout	The proxy closes a client connection if it remains idle for a set period. By default, this is 1,800 seconds (30 minutes). A connection is idle when the application doesn't submit a new request within the specified time after completing the previous request. The proxy keeps the underlying database connection open and returns it to the connection pool, making it available for new client connections. To proactively remove stale connections, reduce the idle client connection timeout. To minimize connection costs during workload spikes, increase the timeout.
Database	The Aurora DB cluster to access through this proxy. The list only includes DB instances and clusters with compatible database engines, engine versions, and other settings. If the list is empty, create a new DB instance or cluster that's compatible with RDS Proxy. To do so, follow the procedure in Creating an Amazon Aurora DB cluster. Then, try creating the proxy again.

Setting	Description
Connection pool maximum connections	A value between 1 and 100 to define the percentage of the `max_connections` limit that RDS Proxy can use. If you only intend to use one proxy with this DB instance or cluster, set this value to 100. For more information about how RDS Proxy uses this setting, see the section called "MaxConnectionsPercent".
Session pinning filters	Prevents RDS Proxy from pinning certain detected session states, which bypasses default safety measures for multiplexing connections. Currently, PostgreSQL doesn't support this setting, and the only available option is `EXCLUDE_VARIABLE_SETS`. Enabling it might cause session variables from one connection to affect others, leading to errors or correctness issues if queries rely on session variables set outside the current transaction. Use this option only after confirming that your applications can safely share database connections. The following patterns are considered safe: • SET statements where there is no change to the effective session variable value. In other words, there is no change to the session variable. • You change the session variable value and execute a statement in the same transaction. For more information, see Avoiding pinning an RDS Proxy.
Connection borrow timeout	If you expect the proxy to use all available database connections, set the wait time before it returns a timeout error. You can specify up to five minutes. This setting applies only when the proxy has reached the maximum number of connections and all are in use.

Setting	Description
Initialization query	(Optional) Add an initialization query, or modify the current one. You can specify one or more SQL statements for the proxy to run when opening each new database connection. The setting is typically used with SET statements to make sure that each connection has identical settings. Make sure that the query you add is valid. To include multiple variables in a single SET statement, use comma separators. For example: `SET variable1 =value1, variable2 =value2` For multiple statements, use semicolons as the separator. **Important** Since you can access initialization query as part of target group configuration, it is not protected by authentication or cryptographic methods. Anyone with access to view or manage your proxy target group configuration can view the initialization query. You should not add sensitive data, such as passwords or long-lived encryption keys, to this option.

Setting	Description
Amazon Identity and Access Management (IAM) role	An IAM role with permission to access the Secrets Manager secrets, which represent the credentials for database user accounts that the proxy can use. Alternatively, you can create a new IAM role from the Amazon Web Services Management Console. **Note** If role manager is enabled in your account, Amazon RDS attaches the role for you, and the role options described here are replaced by a **Customize** option. To use a different role, choose **Customize**. For more information, see IAM role creation in the *IAM User Guide*.
Secrets Manager secrets	Create or choose Secrets Manager secrets representing the credentials for database users accounts that can use the proxy. When **Default authentication scheme** is set to **None**, this field is required. When **Default authentication scheme** is set to **IAM authentication**, this field becomes optional and is marked as such in the console. You can choose one or more secrets from the dropdown or create a new secret using the **Create a new secret** link.
Client authentication type	The type of authentication the proxy uses for connections from clients. Your choice applies to all Secrets Manager secrets that you associate with this proxy. If you need to specify a different client authentication type for each secret, create your proxy by using the Amazon CLI or the API instead. Specify this option only when your client connection uses database credentials for authentication.

Setting	Description
IAM authentication	Specify **Required** or **Not Allowed** for IAM authentication for connections to your proxy. Your choice applies to all Secrets Manager secrets that you associate with this proxy. If you need to specify a different IAM authentication for each secret, create your proxy by using the Amazon CLI or the API instead.
Default authentication scheme	Choose the default type of authentication that the proxy uses for client connections to the proxy and the connections from the proxy to the underlying database. You have the following options: • **None** (default) - The proxy retrieves database credentials from Secrets Manager secrets. • **IAM authentication** - The proxy uses IAM authentication to connect to the database, enabling end-to-end IAM authentic ation. When you select **IAM authentication**, an information alert appears reminding you to enable IAM database authentication for the databases in the target group configuration. **Note** This option is supported for MySQL, PostgreSQL, and MariaDB engine families only.

Setting	Description
Database accounts for IAM authentication	This field appears only when **Default authentication scheme** is set to **IAM authentication** and **Identity and access management (IAM) role** is set to **Create IAM role**. Name the database user accounts for the proxy to use with IAM authentication. This is a required field. Specify multiple accounts by: • Typing a database user name to add it as a tag • Using specific database user names (for example, `db_user`, `jane_doe`) • Using wildcard patterns for multiple users (for example, `db_test_*`) Each account appears as a removable tag that you can delete by clicking the X icon. The console uses these values to create the appropriate `rds-db:connect` permissions in the IAM role policy.
Require Transport Layer Security	Enforces TLS/SSL for all client connections. The proxy uses the same encryption setting for its connection to the underlyin g database, whether the client connection is encrypted or unencrypted.

Setting	Description
Target connection network type	The IP version that the proxy uses to connect to the target database. Choose from the following options: • **IPv4** – The proxy connects to the database using IPv4 addresses. • **IPv6** – The proxy connects to the database using IPv6 addresses. The default is IPv4. To use IPv6, your database must support dual-stack mode. Dual-stack mode is not available for target connections.
Endpoint network type	The IP version for the proxy endpoint that clients use to connect to the proxy. Choose from the following options: • **IPv4** – The proxy endpoint uses IPv4 addresses only. • **IPv6** – The proxy endpoint uses IPv6 addresses only. • **Dual-stack** – The proxy endpoint supports both IPv4 and IPv6 addresses. The default is IPv4. To use IPv6 or dual-stack, your VPC and subnets must be configured to support the selected network type.
Subnets	This field is prepopulated with all subnets associated with your VPC. You can remove any subnets not needed for the proxy, but you must leave at least two subnets. For IPv6 or dual-stac k endpoint network types, ensure that the selected subnets support the chosen network type.

Setting	Description
VPC security group	Choose an existing VPC security group or create a new one from the Amazon Web Services Management Console. Configure the inbound rules to allow your applications to access the proxy and the outbound rules to permit traffic from your database targets. **Note** The security group must allow connections from the proxy to the database. It serves both for ingress from your applications to the proxy and egress from the proxy to the database. For example, if you use the same security group for both the database and the proxy, make sure that resources within that security group can communicate with each other. When you use a shared VPC, avoid using the default security group for the VPC or one associated with another account. Instead, select a security group that belongs to your account. If none exists, create one. For more information, see Work with shared VPCs. RDS deploys a proxy across multiple Availability Zones to ensure high availability. To enable cross-AZ communication, the network access control list (ACL) for your proxy subnet must allow egress on the engine port and ingress on all ports. For more information about network ACLs, see Control traffic to subnets using network ACLs. If the network ACL for your proxy and target are identical, you must add a **TCP** protocol ingress rule where the **Source** is set to the VPC CIDR. You must also add an engine port specific **TCP** protocol egress rule where the **Destination** is set to the VPC CIDR.

Setting	Description
Activate enhanced logging	Enable this setting to troubleshoot proxy compatibility or performance issues. When enabled, RDS Proxy logs detailed performance information to help you debug SQL behavior or proxy connection performance and scalability. Only enable this setting for debugging and ensure proper security measures are in place to protect sensitive informati on in the logs. To minimize overhead, RDS Proxy automatically disables this setting 24 hours after activation. Use it temporari ly to troubleshoot specific issues.

5. Choose **Create proxy**.

Amazon CLI

To create a proxy by using the Amazon CLI, call the create-db-proxy command with the following required parameters:

- `--db-proxy-name`
- `--engine-family`
- `--role-arn`
- `--vpc-subnet-ids`

The `--engine-family` value is case-sensitive.

Example

For Linux, macOS, or Unix:

```
aws rds create-db-proxy \
    --db-proxy-name proxy_name \
    --engine-family { MYSQL | POSTGRESQL | SQLSERVER } \
    --role-arn iam_role \
    --vpc-subnet-ids space_separated_list \
    [--default-auth-scheme { NONE | IAM_AUTH }] \
    [--auth ProxyAuthenticationConfig_JSON_string] \
```

```
    [--vpc-security-group-ids space_separated_list] \
    [--require-tls | --no-require-tls] \
    [--idle-client-timeout value] \
    [--debug-logging | --no-debug-logging] \
    [--endpoint-network-type { IPV4 | IPV6 | DUAL }] \
    [--target-connection-network-type { IPV4 | IPV6 }] \
    [--tags comma_separated_list]
```

For Windows:

```
aws rds create-db-proxy ^
    --db-proxy-name proxy_name ^
    --engine-family { MYSQL | POSTGRESQL | SQLSERVER } ^
    --role-arn iam_role ^
    --vpc-subnet-ids space_separated_list ^
    [--default-auth-scheme { NONE | IAM_AUTH }] ^
    [--auth ProxyAuthenticationConfig_JSON_string] ^
    [--vpc-security-group-ids space_separated_list] ^
    [--require-tls | --no-require-tls] ^
    [--idle-client-timeout value] ^
    [--debug-logging | --no-debug-logging] ^
    [--endpoint-network-type { IPV4 | IPV6 | DUAL }] ^
    [--target-connection-network-type { IPV4 | IPV6 }] ^
    [--tags comma_separated_list]
```

The following is an example of the JSON value for the `--auth` option. This example applies a different client authentication type to each secret.

```
[
  {
    "Description": "proxy description 1",
    "AuthScheme": "SECRETS",
    "SecretArn": "arn:aws:secretsmanager:us-
west-2:123456789123:secret/1234abcd-12ab-34cd-56ef-1234567890ab",
    "IAMAuth": "DISABLED",
    "ClientPasswordAuthType": "POSTGRES_SCRAM_SHA_256"
  },

  {
    "Description": "proxy description 2",
    "AuthScheme": "SECRETS",
    "SecretArn": "arn:aws:secretsmanager:us-
west-2:111122223333:secret/1234abcd-12ab-34cd-56ef-1234567890cd",
```

```
    "IAMAuth": "DISABLED",
    "ClientPasswordAuthType": "POSTGRES_MD5"

  },

  {
    "Description": "proxy description 3",
    "AuthScheme": "SECRETS",
    "SecretArn": "arn:aws:secretsmanager:us-
west-2:111122221111:secret/1234abcd-12ab-34cd-56ef-1234567890ef",
    "IAMAuth": "REQUIRED"
  }

]
```

The `--endpoint-network-type` parameter specifies the IP version for the proxy endpoint that clients use to connect to the proxy. Valid values are:

- `IPV4` – The proxy endpoint uses IPv4 addresses only (default).
- `IPV6` – The proxy endpoint uses IPv6 addresses only.
- `DUAL` – The proxy endpoint supports both IPv4 and IPv6 addresses.

The `--target-connection-network-type` parameter specifies the IP version that the proxy uses to connect to the target database. Valid values are:

- `IPV4` – The proxy connects to the database using IPv4 addresses (default).
- `IPV6` – The proxy connects to the database using IPv6 addresses.

To use IPv6 or dual-stack endpoint network types, your VPC and subnets must be configured to support the selected network type. To use IPv6 target connection network type, your database must support dual-stack mode.

Tip

If you don't already know the subnet IDs to use for the `--vpc-subnet-ids` parameter, see Setting up network prerequisites for RDS Proxy for examples of how to find them.

Note

The security group must allow access to the database the proxy connects to. The same security group is used for ingress from your applications to the proxy, and for egress from the proxy to the database. For example, suppose that you use the same security group for your database and your proxy. In this case, make sure that you specify that resources in that security group can communicate with other resources in the same security group.
When using a shared VPC, you can't use the default security group for the VPC, or one that belongs to another account. Choose a security group that belongs to your account. If one doesn't exist, create one. For more information about this limitation, see Work with shared VPCs.

To create the right associations for the proxy, you also use the register-db-proxy-targets command. Specify the target group name `default`. RDS Proxy automatically creates a target group with this name when you create each proxy.

```
aws rds register-db-proxy-targets
    --db-proxy-name value
    [--target-group-name target_group_name]
    [--db-instance-identifiers space_separated_list]  # rds db instances, or
    [--db-cluster-identifiers cluster_id]        # rds db cluster (all instances)
```

RDS API

To create an RDS proxy, call the Amazon RDS API operation CreateDBProxy. You pass a parameter with the AuthConfig data structure.

RDS Proxy automatically creates a target group named `default` when you create each proxy. You associate an Aurora DB cluster with the target group by calling the function RegisterDBProxyTargets.

Important

When you select **IAM authentication** for the default authentication scheme:

- You must enable IAM database authentication on your target database instances or clusters before the proxy can successfully connect.

- If you choose **Create IAM role**, the **Database accounts for IAM authentication** field is required.
- If you select an existing IAM role, the console does not automatically update the role with database connection permissions. Check that the role has the necessary `rds-db:connect` permissions.

Viewing a proxy

After you create one or more RDS proxies, you can view and manage them in the Amazon Web Services Management Console, the Amazon CLI, or the RDS API. You can review their configuration details, monitor performance, and determine which proxies to modify or delete as needed.

To enable database applications to route traffic through a proxy, you must specify the proxy endpoint in the connection string.

Console

To view a proxy in the console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Proxies**.
3. Select the proxy name to view its details.
4. On the details page, the **Target groups** section shows how the proxy is linked to a specific Aurora DB cluster. You can navigate to the default target group page for a deeper view of this association, including configuration settings defined during proxy creation. These settings include the maximum connection percentage, connection borrow timeout, engine family, and session pinning filters.

CLI

To view your proxy using the CLI, use the describe-db-proxies command. By default, the request returns all proxies owned by your Amazon account. To see details for a single proxy, specify its name with the `--db-proxy-name` parameter.

```
aws rds describe-db-proxies [--db-proxy-name proxy_name]
```

To view other information associated with the proxy, use the following commands.

```
aws rds describe-db-proxy-target-groups  --db-proxy-name proxy_name

aws rds describe-db-proxy-targets --db-proxy-name proxy_name
```

Use the following sequence of commands to see more detail about the things that are associated with the proxy:

1. To get a list of proxies, run describe-db-proxies.
2. To show connection parameters such as the maximum percentage of connections that the proxy can use, run describe-db-proxy-target-groups `--db-proxy-name`. Use the name of the proxy as the parameter value.
3. To see the details of the Aurora DB cluster associated with the returned target group, run describe-db-proxy-targets.

RDS API

To view your proxies using the RDS API, use the DescribeDBProxies operation. It returns values of the DBProxy data type.

To see details of the connection settings for the proxy, use the proxy identifiers from this return value with the DescribeDBProxyTargetGroups operation. It returns values of the DBProxyTargetGroup data type.

To see the RDS instance or Aurora DB cluster associated with the proxy, use the DescribeDBProxyTargets operation. It returns values of the DBProxyTarget data type.

Connecting to a database through RDS Proxy

You connect to an Aurora DB cluster or cluster that uses Aurora serverless through a proxy in generally the same way as you connect directly to the database. The main difference is that you specify the proxy endpoint instead of the cluster endpoint. By default all proxy connections have read/write capability and use the writer instance. If you normally use the reader endpoint for read-only connections, you can create an additional read-only endpoint for the proxy. You can use that endpoint the same way. For more information, see Overview of proxy endpoints.

Topics

- Connecting to a database using database credentials

- Connecting to a database using IAM authentication
- Considerations for connecting to PostgreSQL

Connecting to a database using database credentials

Use the following steps to connect to a proxy using database credentials:

1. Find the proxy endpoint. In the Amazon Web Services Management Console, you can find the endpoint on the details page for the corresponding proxy. With the Amazon CLI, you can use the describe-db-proxies command. The following example shows how.

```
# Add --output text to get output as a simple tab-separated list.
$ aws rds describe-db-proxies --query '*[*].
{DBProxyName:DBProxyName,Endpoint:Endpoint}'
[
    [
        {
            "Endpoint": "the-proxy.proxy-demo.us-east-1.rds.amazonaws.com",
            "DBProxyName": "the-proxy"
        },
        {
            "Endpoint": "the-proxy-other-secret.proxy-demo.us-
east-1.rds.amazonaws.com",
            "DBProxyName": "the-proxy-other-secret"
        },
        {
            "Endpoint": "the-proxy-rds-secret.proxy-demo.us-
east-1.rds.amazonaws.com",
            "DBProxyName": "the-proxy-rds-secret"
        },
        {
            "Endpoint": "the-proxy-t3.proxy-demo.us-east-1.rds.amazonaws.com",
            "DBProxyName": "the-proxy-t3"
        }
    ]
]
```

2. Specify the endpoint as the host parameter in the connection string for your client application. For example, specify the proxy endpoint as the value for the `mysql -h` option or `psql -h` option.
3. Supply the same database user name and password as you usually do.

Connecting to a database using IAM authentication

When you use IAM authentication with RDS Proxy, you have two options for authentication between your client and proxy:

- Set up your database users to authenticate with regular user names and passwords. RDS Proxy retrieves the user name and password credentials from Secrets Manager. The connection from RDS Proxy to the underlying database doesn't go through IAM.
- You can also use end-to-end IAM authentication, which connects to your database through the proxy using IAM without requiring database credentials.

To connect to RDS Proxy using IAM authentication, use the same general connection procedure as for IAM authentication with an Aurora DB cluster. For general information about using IAM, see Security in Amazon Aurora. If you are using end-to-end IAM authentication, provide the IAM authentication plugin to your DB user. See Creating a database account using IAM authentication.

The major differences in IAM usage for RDS Proxy include the following:

- With standard IAM authentication, database users have regular credentials within the database. You set up Secrets Manager secrets containing these user names and passwords, and authorize RDS Proxy to retrieve the credentials from Secrets Manager. The IAM authentication applies to the connection between your client program and the proxy. The proxy then authenticates to the database using the user name and password credentials retrieved from Secrets Manager.
- With end-to-end IAM authentication, you don't need to configure Secrets Manager secrets for database credentials. The IAM authentication applies to the connection between the client to the proxy and proxy to the database.
- Instead of the instance, cluster, or reader endpoint, you specify the proxy endpoint. For details about the proxy endpoint, see Connecting to your DB cluster using IAM authentication.
- Make sure that you use Transport Layer Security (TLS)/Secure Sockets Layer (SSL) when connecting to a proxy using IAM authentication.

You can grant a specific user access to the proxy by modifying the IAM policy. An example follows.

```
"Resource": "arn:aws-cn:rds-db:us-east-2:1234567890:dbuser:prx-ABCDEFGHIJKL01234/
db_user"
```

Tip

When configuring IAM authentication for RDS Proxy connections, follow these important guidelines to avoid connection issues:

- Do not grant the `rds_iam` role while maintaining general password authentication for the same database user or role.
- Remember that while clients connect to RDS Proxy using IAM authentication, RDS Proxy always connects to the database using password authentication through Secrets Manager.
- If you experience frequent connection terminations and reconnections, remove any existing `rds_iam` grants from the user or role and use only password authentication.
- Ensure your password policy satisfies SCRAM-SHA-256 safe character requirements.

Mixing IAM and password authentication methods for the same database user can cause connection instability.

Considerations for connecting to PostgreSQL

If you create a new PostgreSQL database user for connecting to RDS Proxy, make sure that you grant the user `CONNECT` privilege on the database. Without this, the user can't establish a connection. For more information, see the section called “Adding a new database user to a PostgreSQL database when using RDS Proxy”.

When a client starts a connection to a PostgreSQL database, it sends a startup message. This message includes pairs of parameter name and value strings. For details, see the `StartupMessage` in PostgreSQL message formats in the PostgreSQL documentation.

When you connect through an RDS proxy, the startup message can include the following currently recognized parameters:

- `user`
- `database`

The startup message can also include the following additional runtime parameters:

- application_name
- client_encoding
- DateStyle
- TimeZone
- extra_float_digits
- search_path

For more information about PostgreSQL messaging, see the Frontend/Backend protocol in the PostgreSQL documentation.

For PostgreSQL, if you use JDBC, we recommend the following to avoid pinning:

- Set the JDBC connection parameter `assumeMinServerVersion` to at least `9.0` to avoid pinning. This prevents the JDBC driver from performing an extra round trip during connection startup when it runs `SET extra_float_digits = 3`.
- Set the JDBC connection parameter `ApplicationName` to *any/your-application-name* to avoid pinning. Doing this prevents the JDBC driver from performing an extra round trip during connection startup when it runs `SET application_name = "PostgreSQL JDBC Driver"`. Note the JDBC parameter is `ApplicationName` but the PostgreSQL `StartupMessage` parameter is `application_name`.

For more information, see Avoiding pinning an RDS Proxy. For more information about connecting using JDBC, see Connecting to the database in the PostgreSQL documentation.

Managing an RDS Proxy

This section provides information on how to manage RDS Proxy operation and configuration. These procedures help your application make the most efficient use of database connections and achieve maximum connection reuse. The more that you can take advantage of connection reuse, the more CPU and memory overhead that you can save. This in turn reduces latency for your application and enables the database to devote more of its resources to processing application requests.

Topics

- Modifying an RDS Proxy
- Adding a new database user when using RDS Proxy

- Moving from standard IAM authentication to end-to-end IAM authentication for RDS Proxy
- RDS Proxy connection considerations
- Avoiding pinning an RDS Proxy
- Deleting an RDS Proxy

Modifying an RDS Proxy

You can change specific settings associated with a proxy after you create the proxy. You do so by modifying the proxy itself, its associated target group, or both. Each proxy has an associated target group.

Amazon Web Services Management Console

> **Important**
>
> The values in the **Client authentication type** and **IAM authentication** fields apply to all Secrets Manager secrets that are associated with this proxy. To specify different values for each secret, modify your proxy by using the Amazon CLI or the API instead.

To modify the settings for a proxy

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Proxies**.
3. In the list of proxies, choose the proxy whose settings you want to modify or go to its details page.
4. For **Actions**, choose **Modify**.
5. Enter or choose the properties to modify. You can modify the following:
   - **Proxy identifier** – Rename the proxy by entering a new identifier.
   - **Idle client connection timeout** – Enter a time period for the idle client connection timeout.
   - **IAM role** – Change the IAM role used to retrieve the secrets from Secrets Manager.

> **Note**
>
> You can't create a new IAM role if you set **Default authentication scheme** to **IAM authentication**.

- **Secrets Manager secrets** – Add or remove Secrets Manager secrets. These secrets correspond to database user names and passwords.
- **Client authentication type** – Change the type of authentication for client connections to the proxy.
- **IAM authentication** – Require or disallow IAM authentication for connections to the proxy.
- **Default authentication scheme** – Change the default authentication scheme the proxy uses for client connections to the proxy and connections from the proxy to the underlying database.
- **Require Transport Layer Security** – Turn the requirement for Transport layer Security (TLS) on or off.
- **VPC security group** – Add or remove VPC security groups for the proxy to use.
- **Enable enhanced logging** – Enable or disable enhanced logging.

6. Choose **Modify**.

If you didn't find the settings listed that you want to change, use the following procedure to update the target group for the proxy. The *target group* associated with a proxy controls the settings related to the physical database connections. Each proxy has one associated target group named `default`, which is created automatically along with the proxy. You can't rename the default target group.

You can only modify the target group from the proxy details page, not from the list on the **Proxies** page.

To modify the settings for a proxy target group

1. On the **Proxies** page, go to the details page for a proxy.
2. For **Target groups**, choose the `default` link. Currently, all proxies have a single target group named `default`.
3. On the details page for the **default** target group, choose **Modify**.
4. Choose new settings for the properties that you can modify:

- **Database** – Choose a different Aurora cluster.
- **Connection pool maximum connections** – Adjust what percentage of the maximum available connections the proxy can use.
- **Session pinning filters** – (Optional) Choose a session pinning filter. This circumvents the default safety measures for multiplexing database connections across client connections. Currently, the setting isn't supported for PostgreSQL. The only choice is `EXCLUDE_VARIABLE_SETS`.

  Enabling this setting can cause session variables of one connection to impact other connections. This can cause errors or correctness issues if your queries depend on session variable values set outside of the current transaction. Consider using this option after verifying it is safe for your applications to share database connections across client connections.

  The following patterns can be considered safe:

  - SET statements where there is no change to the effective session variable value, that is, there is no change to the session variable.
  - You change the session variable value and execute a statement in the same transaction.

  For more information, see Avoiding pinning an RDS Proxy.
- **Connection borrow timeout** – Adjust the connection borrow timeout interval. This setting applies when the maximum number of connections is already being used for the proxy. The setting determines how long the proxy waits for a connection to become available before returning a timeout error.
- **Initialization query**. (Optional) Add an initialization query, or modify the current one. You can specify one or more SQL statements for the proxy to run when opening each new database connection. The setting is typically used with SET statements to make sure that each connection has identical settings. Make sure that the query you add is valid. To include multiple variables in a single SET statement, use comma separators. For example:

  ```
  SET variable1=value1, variable2=value2
  ```

  For multiple statements, use semicolons as the separator.

You can't change certain properties, such as the target group identifier and the database engine.

5. Choose **Modify target group**.

Amazon CLI

To modify a proxy using the Amazon CLI, use the commands modify-db-proxy, modify-db-proxy-target-group, deregister-db-proxy-targets, and register-db-proxy-targets.

With the `modify-db-proxy` command, you can change properties such as the following:

- The set of Secrets Manager secrets used by the proxy.
- Whether TLS is required.
- The idle client timeout.
- Whether to log additional information from SQL statements for debugging.
- The IAM role used to retrieve Secrets Manager secrets.
- The security groups used by the proxy.
- The default authentication scheme associated with the proxy.

The following example shows how to rename an existing proxy.

```
aws rds modify-db-proxy --db-proxy-name the-proxy --new-db-proxy-name the_new_name
```

To modify connection-related settings or rename the target group, use the `modify-db-proxy-target-group` command. Currently, all proxies have a single target group named `default`. When you work with this target group, you specify the name of the proxy and `default` for the name of the target group. You can't rename the default target group.

The following example shows how to first check the `MaxIdleConnectionsPercent` setting for a proxy and then change it, using the target group.

```
aws rds describe-db-proxy-target-groups --db-proxy-name the-proxy

{
```

```
    "TargetGroups": [
        {
            "Status": "available",
            "UpdatedDate": "2019-11-30T16:49:30.342Z",
            "ConnectionPoolConfig": {
                "MaxIdleConnectionsPercent": 50,
                "ConnectionBorrowTimeout": 120,
                "MaxConnectionsPercent": 100,
                "SessionPinningFilters": []
            },
            "TargetGroupName": "default",
            "CreatedDate": "2019-11-30T16:49:27.940Z",
            "DBProxyName": "the-proxy",
            "IsDefault": true
        }
    ]
}

aws rds modify-db-proxy-target-group --db-proxy-name the-proxy --target-group-name
 default --connection-pool-config '
{ "MaxIdleConnectionsPercent": 75 }'

{
    "DBProxyTargetGroup": {
        "Status": "available",
        "UpdatedDate": "2019-12-02T04:09:50.420Z",
        "ConnectionPoolConfig": {
            "MaxIdleConnectionsPercent": 75,
            "ConnectionBorrowTimeout": 120,
            "MaxConnectionsPercent": 100,
            "SessionPinningFilters": []
        },
        "TargetGroupName": "default",
        "CreatedDate": "2019-11-30T16:49:27.940Z",
        "DBProxyName": "the-proxy",
        "IsDefault": true
    }
}
```

With the `deregister-db-proxy-targets` and `register-db-proxy-targets` commands, you change which Aurora DB clusters the proxy is associated with through its target group. Currently, each proxy can connect to one Aurora DB cluster. The target group tracks the connection details for all the all the DB instances in an Aurora cluster.

The following example starts with a proxy that is associated with an Aurora MySQL cluster named `cluster-56-2020-02-25-1399`. The example shows how to change the proxy so that it can connect to a different cluster named `provisioned-cluster`.

When you work with an Aurora DB cluster, you specify the `--db-cluster-identifier` option.

The following example modifies an Aurora MySQL proxy. An Aurora PostgreSQL proxy has port 5432.

```
aws rds describe-db-proxy-targets --db-proxy-name the-proxy

{
    "Targets": [
        {
            "Endpoint": "instance-9814.demo.us-east-1.rds.amazonaws.com",
            "Type": "RDS_INSTANCE",
            "Port": 3306,
            "RdsResourceId": "instance-9814"
        },
        {
            "Endpoint": "instance-8898.demo.us-east-1.rds.amazonaws.com",
            "Type": "RDS_INSTANCE",
            "Port": 3306,
            "RdsResourceId": "instance-8898"
        },
        {
            "Endpoint": "instance-1018.demo.us-east-1.rds.amazonaws.com",
            "Type": "RDS_INSTANCE",
            "Port": 3306,
            "RdsResourceId": "instance-1018"
        },
        {
            "Type": "TRACKED_CLUSTER",
            "Port": 0,
            "RdsResourceId": "cluster-56-2020-02-25-1399"
        },
        {
            "Endpoint": "instance-4330.demo.us-east-1.rds.amazonaws.com",
            "Type": "RDS_INSTANCE",
            "Port": 3306,
            "RdsResourceId": "instance-4330"
        }
    ]
```

```
}

aws rds deregister-db-proxy-targets --db-proxy-name the-proxy --db-cluster-identifier
 cluster-56-2020-02-25-1399

aws rds describe-db-proxy-targets --db-proxy-name the-proxy

{
    "Targets": []
}

aws rds register-db-proxy-targets --db-proxy-name the-proxy --db-cluster-identifier
 provisioned-cluster

{
    "DBProxyTargets": [
        {
            "Type": "TRACKED_CLUSTER",
            "Port": 0,
            "RdsResourceId": "provisioned-cluster"
        },
        {
            "Endpoint": "gkldje.demo.us-east-1.rds.amazonaws.com",
            "Type": "RDS_INSTANCE",
            "Port": 3306,
            "RdsResourceId": "gkldje"
        },
        {
            "Endpoint": "provisioned-1.demo.us-east-1.rds.amazonaws.com",
            "Type": "RDS_INSTANCE",
            "Port": 3306,
            "RdsResourceId": "provisioned-1"
        }
    ]
}
```

RDS API

To modify a proxy using the RDS API, you use the operations ModifyDBProxy, ModifyDBProxyTargetGroup, DeregisterDBProxyTargets, and RegisterDBProxyTargets operations.

With `ModifyDBProxy`, you can change properties such as the following:

- The set of Secrets Manager secrets used by the proxy.

- Whether TLS is required.
- The idle client timeout.
- Whether to log additional information from SQL statements for debugging.
- The IAM role used to retrieve Secrets Manager secrets.
- The security groups used by the proxy.

With `ModifyDBProxyTargetGroup`, you can modify connection-related settings. Currently, all proxies have a single target group named `default`. When you work with this target group, you specify the name of the proxy and `default` for the name of the target group. You can't rename the default target group.

With `DeregisterDBProxyTargets` and `RegisterDBProxyTargets`, you change which Aurora cluster the proxy is associated with through its target group. Currently, each proxy can connect to one Aurora cluster. The target group tracks the connection details for the DB instances in an Aurora cluster.

Adding a new database user when using RDS Proxy

In some cases, you might add a new database user to an Aurora cluster that's associated with a proxy. Proceed depending on whether you're using standard authentication with Secrets Manager secrets or end-to-end IAM authentication.

If you are using the standard IAM authentication, follow these instructions:

1. Create a new Secrets Manager secret, using the procedure described in Setting up database credentials for RDS Proxy.
2. Update the IAM role to give RDS Proxy access to the new Secrets Manager secret. To do so, update the resources section of the IAM role policy.
3. Modify the RDS Proxy to add the new Secrets Manager secret under **Secrets Manager secrets**.
4. If the new user takes the place of an existing one, update the credentials stored in the proxy's Secrets Manager secret for the existing user.

If you're using end-to-end IAM authentication, you need to create the database user and configure IAM permissions. To do this, run through the following steps:

1. Create a new database user in your database that matches the IAM user or role name you want to use for authentication.

2. Ensure the database user is configured with IAM authentication plugin at the database. See Creating a database account using IAM authentication.
3. Update the IAM policy to grant the `rds-db:connect` permission to the IAM user or role, as described in Creating an IAM policy for end-to-end IAM authentication.
4. Ensure your proxy is configured to use IAM authentication as the default authentication scheme.

With end-to-end IAM authentication, you don't need to manage database credentials in Secrets Manager secrets, as IAM credentials are used for authentication from the client to the proxy and from the proxy to the database.

Adding a new database user to a PostgreSQL database when using RDS Proxy

When adding a new user to your PostgreSQL database, if you have run the following command:

```
REVOKE CONNECT ON DATABASE postgres FROM PUBLIC;
```

Grant the `rdsproxyadmin` user the `CONNECT` privilege so the user can monitor connections on the target database.

```
GRANT CONNECT ON DATABASE postgres TO rdsproxyadmin;
```

You can also allow other target database users to perform health checks by changing `rdsproxyadmin` to the database user in the command above.

Changing the password for a database user when using RDS Proxy

In some cases, you might change the password for a database user in an Aurora cluster that's associated with a proxy. If so, update the corresponding Secrets Manager secret with the new password.

If you're using end-to-end IAM authentication, you don't need to update any passwords in Secrets Manager secrets.

Moving from standard IAM authentication to end-to-end IAM authentication for RDS Proxy

If you currently use standard IAM authentication for RDS Proxy, where clients authenticate to the proxy using IAM but the proxy connects to the database using secrets, you can migrate to end-to-

end IAM authentication where both client-to-proxy and proxy-to-database connections use IAM authentication.

To move to end-to-end IAM authentication

1. **Update RDS Proxy IAM role permissions**

   Create an updated proxy permission policy that includes both Secrets Manager and `rds:db-connect` permissions:

```
# Create updated proxy permission policy
cat > updated-proxy-policy.json # EOF
```

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "GetSecretsValue",
      "Action": [
        "secretsmanager:GetSecretValue"
      ],
      "Effect": "Allow",
      "Resource": [
        "arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:secretName-1234f"
      ]
    },
    {
      "Sid": "RdsDBConnect",
      "Action": [
        "rds-db:connect"
      ],
      "Effect": "Allow",
      "Resource": [
        "arn:aws-cn:rds-db:us-east-1:123456789012:dbuser:cluster-ABCDEFGHIJKL01234/
jane_doe"
      ]
    }
  ]
}
```

   Update proxy your role policy:

```
aws iam put-role-policy \
            --role-name RDSProxyRole \
            --policy-name UpdatedProxyPermissions \
            --policy-document file://updated-proxy-policy.json
```

2. Modify your RDS Proxy to enable end-to-end IAM authentication

```
aws rds modify-db-proxy \
  --db-proxy-name my-database-proxy \
  --default-auth-scheme IAM_AUTH \
  --region us-east-1
```

Verify that RDS Proxy status is **Available** and `DefaultAuthScheme` is `IAM_AUTH` before proceeding to ensure zero downtime during migration.

```
aws rds describe-db-proxies --db-proxy-name my-database-proxy --region us-east-1
```

Expected output:

```
{
  "DBProxies": [
    {
      "DBProxyName": "my-database-proxy",
      "DBProxyArn": "arn:aws-cn:rds:us-east-1:123456789012:db-
proxy:prx-0123456789abcdef",
      "Status": "available",
      ...
      "DefaultAuthScheme": "IAM_AUTH"
    }
  ]
}
```

3. Enable IAM authentication on database

```
aws rds modify-db-cluster \
  --db-cluster-identifier my-database-cluster \
  --enable-iam-database-authentication \
  --region us-east-1
```

4. Configure database user for IAM authentication

For Aurora PostgreSQL:

```
GRANT rds_iam TO jane_doe;
```

For Aurora MySQL:

```
ALTER USER 'jane_doe' IDENTIFIED WITH AWSAuthenticationPlugin AS 'RDS';
ALTER USER 'jane_doe'@'%' REQUIRE SSL;
```

5. Your client application code doesn't need to change. The connection process remains the same:

For Aurora PostgreSQL:

```
# Generate authentication token
export PGPASSWORD=$(aws rds generate-db-auth-token \
  --hostname my-database-proxy.proxy-ABCDEFGHIJKL01234.us-east-1.rds.amazonaws.com
 \
  --port 5432 \
  --username jane_doe \
  --region us-east-1)

# Connect to database through proxy
psql "host=my-database-proxy.proxy-ABCDEFGHIJKL01234.us-east-1.rds.amazonaws.com
 port=5432 user=jane_doe dbname=postgres password=$PGPASSWORD sslmode=require
 sslrootcert=us-east-1-bundle.pem"
```

For Aurora MySQL:

```
# Generate authentication token
export MYSQL_PWD=$(aws rds generate-db-auth-token \
  --hostname my-database-proxy.proxy-ABCDEFGHIJKL01234.us-east-1.rds.amazonaws.com
 \
  --port 3306 \
  --username jane_doe \
  --region us-east-1)

# Connect to database through proxy
mysql -h my-database-proxy.proxy-ABCDEFGHIJKL01234.us-east-1.rds.amazonaws.com \
  -P 3306 \
  -u jane_doe \
  --ssl-ca=us-east-1-bundle.pem \
```

```
  --enable-cleartext-plugin
```

RDS Proxy connection considerations

Configuring connection settings

To adjust RDS Proxy's connection pooling, you can modify the following settings:

- IdleClientTimeout
- MaxConnectionsPercent
- MaxIdleConnectionsPercent
- ConnectionBorrowTimeout

IdleClientTimeout

You can specify how long a client connection can be idle before the proxy closes it. The default is 1,800 seconds (30 minutes).

A client connection is considered *idle* when the application doesn't submit a new request within the specified time after the previous request completed. The underlying database connection stays open and is returned to the connection pool. Thus, it's available to be reused for new client connections. If you want the proxy to proactively remove stale connections, then lowering the idle client connection timeout. If your workload establishes frequent connections with the proxy, then raise the idle client connection timeout to save the cost of establishing connections.

This setting is represented by the **Idle client connection timeout** field in the RDS console and the `IdleClientTimeout` setting in the Amazon CLI and the API. To learn how to change the value of the **Idle client connection timeout** field in the RDS console, see Amazon Web Services Management Console. To learn how to change the value of the `IdleClientTimeout` setting, see the CLI command modify-db-proxy or the API operation ModifyDBProxy.

MaxConnectionsPercent

You can limit the number of connections that an RDS Proxy can establish with the target database. You specify the limit as a percentage of the maximum connections available for your database. This setting is represented by the **Connection pool maximum connections** field in the RDS console and the `MaxConnectionsPercent` setting in the Amazon CLI and the API.

The MaxConnectionsPercent value is expressed as a percentage of the max_connections setting for the Aurora DB cluster used by the target group. The proxy doesn't create all of these connections in advance. This setting allows the proxy to establish these connections as the workload needs them.

For example, for a registered database target with max_connections set to 1000, and MaxConnectionsPercent set to 95, RDS Proxy sets 950 connections as the upper limit for concurrent connections to that database target.

A common side-effect of your workload reaching the maximum number of allowed database connections is an increase in overall query latency, along with an increase in the DatabaseConnectionsBorrowLatency metric. You can monitor currently used and total allowed database connections by comparing the DatabaseConnections and MaxDatabaseConnectionsAllowed metrics.

When setting this parameter, note the following best practices:

- Allow sufficient connection headroom for changes in workload pattern. It is recommended to set the parameter at least 30% above your maximum recent monitored usage. As RDS Proxy redistributes database connection quotas across multiple nodes, internal capacity changes might require at least 30% headroom for additional connections to avoid increased borrow latencies.
- RDS Proxy reserves a certain number of connections for active monitoring to support fast failover, traffic routing and internal operations. The MaxDatabaseConnectionsAllowed metric does not include these reserved connections. It represents the number of connections available to serve the workload, and can be lower than the value derived from the MaxConnectionsPercent setting.

  Minimal recommended MaxConnectionsPercent values are as follows:

  - db.t3.small: 100
  - db.t3.medium: 55
  - db.t3.large: 35
  - db.r3.large or above: 20

  If multiple target instances are registered with RDS Proxy like an Aurora cluster with reader nodes, set the minimum value based on the smallest registered instance.

To learn how to change the value of the **Connection pool maximum connections** field in the RDS console, see Amazon Web Services Management Console. To learn how to change the value of the `MaxConnectionsPercent` setting, see the CLI command modify-db-proxy-target-group or the API operation ModifyDBProxyTargetGroup.

> **Important**
>
> If the DB cluster is part of a global database with write forwarding turned on, reduce your proxy's `MaxConnectionsPercent` value by the quota that's allotted for write forwarding. The write forwarding quota is set in the DB cluster parameter `aurora_fwd_writer_max_connections_pct`. For information about write forwarding, see Using write forwarding in an Amazon Aurora global database.

For information on database connection limits, see Maximum connections to an Aurora MySQL DB instance and Maximum connections to an Aurora PostgreSQL DB instance.

MaxIdleConnectionsPercent

You can control the number of idle database connections that RDS Proxy can keep in the connection pool. By default, RDS Proxy considers a database connection in its pool to be *idle* when there's been no activity on the connection for five minutes.

The `MaxIdleConnectionsPercent` value is expressed as a percentage of the `max_connections` setting for the RDS DB instance target group. The default value is 50 percent of `MaxConnectionsPercent`, and the upper limit is the value of `MaxConnectionsPercent`. For example, if `MaxConnectionsPercent`, is 80, then the default value of `MaxIdleConnectionsPercent` is 40.

With a high value, the proxy leaves a high percentage of idle database connections open. With a low value, the proxy closes a high percentage of idle database connections. If your workloads are unpredictable, consider setting a high value for `MaxIdleConnectionsPercent`. Doing so means that RDS Proxy can accommodate surges in activity without opening a lot of new database connections.

This setting is represented by the `MaxIdleConnectionsPercent` setting of `DBProxyTargetGroup` in the Amazon CLI and the API. To learn how to change the value of the `MaxIdleConnectionsPercent` setting, see the CLI command modify-db-proxy-target-group or the API operation ModifyDBProxyTargetGroup.

For information on database connection limits, see Maximum connections to an Aurora MySQL DB instance and Maximum connections to an Aurora PostgreSQL DB instance.

ConnectionBorrowTimeout

You can choose how long RDS Proxy waits for a database connection in the connection pool to become available for use before returning a timeout error. The default is 120 seconds. This setting applies when the number of connections is at the maximum, and so no connections are available in the connection pool. It also applies when no appropriate database instance is available to handle the request, such as when a failover operation is in process. Using this setting, you can set the best wait period for your application without changing the query timeout in your application code.

This setting is represented by the **Connection borrow timeout** field in the RDS console or the `ConnectionBorrowTimeout` setting of `DBProxyTargetGroup` in the Amazon CLI or API. To learn how to change the value of the **Connection borrow timeout** field in the RDS console, see Amazon Web Services Management Console. To learn how to change the value of the `ConnectionBorrowTimeout` setting, see the CLI command modify-db-proxy-target-group or the API operation ModifyDBProxyTargetGroup.

Client and database connections

Connections from your application to RDS Proxy are known as client connections. Connections from a proxy to the database are database connections. When using RDS Proxy, client connections terminate at the proxy while database connections are managed within RDS Proxy.

Application-side connection pooling can provide the benefit of reducing recurring connection establishment between your application and RDS Proxy.

Consider the following configuration aspects before implementing an application-side connection pool:

- Client connection max life: RDS Proxy enforces a maximum life of client connections of 24 hours. This value is not configurable. Configure your pool with a maximum connection life less than 24 hours to avoid unexpected client connection drops.
- Client connection idle timeout: RDS Proxy enforces a maximum idle time for client connections. Configure your pool with an idle connection timeout of a value lower than your client connection idle timeout setting for RDS Proxy to avoid unexpected connection drops.

The maximum number of client connections configured in your application-side connection pool does not have to be limited to the **max_connections** setting for RDS Proxy.

Client connection pooling results in a longer client connection life. If your connections experience pinning, then pooling client connections might reduce multiplexing efficiency. Client connections that are pinned but idle in the application-side connection pool continue to hold on to a database connection and prevent the database connection to be reused by other client connections. Review your proxy logs to check whether your connections experience pinning.

> **Note**
>
> RDS Proxy closes database connections some time after 24 hours when they are no longer in use. The proxy performs this action regardless of the value of the maximum idle connections setting.

Avoiding pinning an RDS Proxy

Multiplexing is more efficient when database requests don't rely on state information from previous requests. In that case, RDS Proxy can reuse a connection at the conclusion of each transaction. Examples of such state information include most variables and configuration parameters that you can change through SET or SELECT statements. SQL transactions on a client connection can multiplex between underlying database connections by default.

Your connections to the proxy can enter a state known as *pinning*. When a connection is pinned, each later transaction uses the same underlying database connection until the session ends. Other client connections also can't reuse that database connection until the session ends. The session ends when the client connection is dropped.

RDS Proxy automatically pins a client connection to a specific DB connection when it detects a session state change that isn't appropriate for other sessions. Pinning reduces the effectiveness of connection reuse. If all or almost all of your connections experience pinning, consider modifying your application code or workload to reduce the conditions that cause the pinning.

For example, your application changes a session variable or configuration parameter. In this case, later statements can rely on the new variable or parameter to be in effect. Thus, when RDS Proxy processes requests to change session variables or configuration settings, it pins that session to the DB connection. That way, the session state remains in effect for all later transactions in the same session.

For some database engines, this rule doesn't apply to all parameters that you can set. RDS Proxy tracks certain statements and variables. Thus, RDS Proxy doesn't pin the session when you modify them. In this case, RDS Proxy only reuses the connection for other sessions that have the same values for those settings. For the lists of tracked statements and variables for Aurora MySQL, see What RDS Proxy tracks for Aurora MySQL databases.

What RDS Proxy tracks for Aurora MySQL databases

RDS Proxy tracks the following MySQL statements:

- DROP DATABASE
- DROP SCHEMA
- USE

RDS Proxy tracks the following MySQL variables:

- `AUTOCOMMIT`
- `AUTO_INCREMENT_INCREMENT`
- `CHARACTER SET (or CHAR SET)`
- `CHARACTER_SET_CLIENT`
- `CHARACTER_SET_DATABASE`
- `CHARACTER_SET_FILESYSTEM`
- `CHARACTER_SET_CONNECTION`
- `CHARACTER_SET_RESULTS`
- `CHARACTER_SET_SERVER`
- `COLLATION_CONNECTION`
- `COLLATION_DATABASE`
- `COLLATION_SERVER`
- `INTERACTIVE_TIMEOUT`
- `NAMES`
- `NET_WRITE_TIMEOUT`
- `QUERY_CACHE_TYPE`
- `SESSION_TRACK_SCHEMA`
- `SQL_MODE`

- `TIME_ZONE`
- `TRANSACTION_ISOLATION (or TX_ISOLATION)`
- `TRANSACTION_READ_ONLY (or TX_READ_ONLY)`
- `WAIT_TIMEOUT`

> **Note**
>
> RDS Proxy tracks changes to the `TRANSACTION_ISOLATION` and `TRANSACTION_READ_ONLY` variables when you set them at the session scope. However, if you set them at the next transaction scope, RDS Proxy pins connections. This behavior applies whether you use a `SET` statement or a `SET TRANSACTION` statement to configure these values.

Minimizing pinning

Performance tuning for RDS Proxy involves trying to maximize transaction-level connection reuse (multiplexing) by minimizing pinning.

You can minimize pinning by doing the following:

- Avoid unnecessary database requests that might cause pinning.
- Set variables and configuration settings consistently across all connections. That way, later sessions are more likely to reuse connections that have those particular settings.

  However, for PostgreSQL setting a variable leads to session pinning.
- For a MySQL engine family database, apply a session pinning filter to the proxy. You can exempt certain kinds of operations from pinning the session if you know that doing so doesn't affect the correct operation of your application.
- See how frequently pinning occurs by monitoring the Amazon CloudWatch metric `DatabaseConnectionsCurrentlySessionPinned`. For information about this and other CloudWatch metrics, see Monitoring RDS Proxy metrics with Amazon CloudWatch.
- If you use `SET` statements to perform identical initialization for each client connection, you can do so while preserving transaction-level multiplexing. In this case, you move the statements that set up the initial session state into the initialization query used by a proxy. This property is a string containing one or more SQL statements, separated by semicolons.

For example, you can define an initialization query for a proxy that sets certain configuration parameters. Then, RDS Proxy applies those settings whenever it sets up a new connection for that proxy. You can remove the corresponding SET statements from your application code, so that they don't interfere with transaction-level multiplexing.

For metrics about how often pinning occurs for a proxy, see Monitoring RDS Proxy metrics with Amazon CloudWatch.

Conditions that cause pinning for all engine families

The proxy pins the session to the current connection in the following situations where multiplexing might cause unexpected behavior:

- Any statement with a text size greater than 16 KB causes the proxy to pin the session.

Conditions that cause pinning for Aurora MySQL

For MySQL, the following interactions also cause pinning:

- Explicit table lock statements `LOCK TABLE`, `LOCK TABLES`, or `FLUSH TABLES WITH READ LOCK` cause the proxy to pin the session.
- Creating named locks by using `GET_LOCK` causes the proxy to pin the session.
- Setting a user or system variable (with some exceptions) pins the session to the proxy. If this significantly limits connection reuse, you can configure `SET` operations to avoid pinning. To do this, adjust the session pinning filters property. For more information, see Creating a proxy for Amazon Aurora and Modifying an RDS Proxy.
- Creating a temporary table causes the proxy to pin the session. That way, the contents of the temporary table are preserved throughout the session regardless of transaction boundaries.
- Calling the `ROW_COUNT` and `FOUND_ROWS` functions sometimes causes pinning.

  The exact circumstances where these functions cause pinning might differ among Aurora MySQL versions that are compatible with MySQL 5.7.
- Prepared statements cause the proxy to pin the session. This rule applies whether the prepared statement uses SQL text or the binary protocol.
- RDS Proxy does not pin connections when you use SET LOCAL.

- Calling stored procedures and stored functions doesn't cause pinning. RDS Proxy doesn't detect any session state changes resulting from such calls. Make sure that your application doesn't change session state inside stored routines if you rely on that session state to persist across transactions. For example, RDS Proxy isn't currently compatible with a stored procedure that creates a temporary table that persists across all transactions.
- Queries with executable comments for MySQL (syntax /*! ... */) or MariaDB (syntax /*M! ... */) cause pinning. RDS Proxy cannot parse SQL embedded in these comments to track session state changes.

If you have expert knowledge about your application behavior, you can skip the pinning behavior for certain application statements. To do so, choose the **Session pinning filters** option when creating the proxy. Currently, you can opt out of session pinning for setting session variables and configuration settings.

Conditions that cause pinning for Aurora PostgreSQL

For PostgreSQL, the following interactions also cause pinning:

- Using `SET` commands.
- Using `PREPARE`, `DISCARD`, `DEALLOCATE`, or `EXECUTE` commands to manage prepared statements.
- Creating temporary sequences, tables, or views.
- Declaring cursors.
- Discarding the session state.
- Listening on a notification channel.
- Loading a library module such as `auto_explain`.
- Manipulating sequences using functions such as `nextval` and `setval`.
- Interacting with locks using functions such as `pg_advisory_lock` and `pg_try_advisory_lock`.

> **Note**
>
> RDS Proxy does not pin on transaction level advisory locks, specifically `pg_advisory_xact_lock`, `pg_advisory_xact_lock_shared`, `pg_try_advisory_xact_lock`, and `pg_try_advisory_xact_lock_shared`.

- Setting a parameter, or resetting a parameter to its default. Specifically, using `SET` and `set_config` commands to assign default values to session variables.
- Calling stored procedures and stored functions doesn't cause pinning. RDS Proxy doesn't detect any session state changes resulting from such calls. Make sure that your application doesn't change session state inside stored routines if you rely on that session state to persist across transactions. For example, RDS Proxy isn't currently compatible with a stored procedure that creates a temporary table that persists across all transactions.
- Discarding session state. If you use connection pooling libraries with `DISCARD ALL` query configured as a reset query, RDS Proxy pins your client connection on release. This reduces the proxy's multiplexing efficiency and might lead to unexpected results because the `DISCARD ALL` command can interfere with session state management.

Deleting an RDS Proxy

You can delete a proxy when you no longer need it. Or, you might delete a proxy if you take the DB instance or cluster associated with it out of service.

Amazon Web Services Management Console

To delete a proxy

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Proxies**.
3. Choose the proxy to delete from the list.
4. Choose **Delete Proxy**.

Amazon CLI

To delete a DB proxy, use the Amazon CLI command delete-db-proxy. To remove related associations, also use the deregister-db-proxy-targets command.

```
aws rds delete-db-proxy --name proxy_name
```

```
aws rds deregister-db-proxy-targets
    --db-proxy-name proxy_name
```

```
    [--target-group-name target_group_name]
    [--target-ids comma_separated_list]       # or
    [--db-instance-identifiers instance_id]       # or
    [--db-cluster-identifiers cluster_id]
```

RDS API

To delete a DB proxy, call the Amazon RDS API function DeleteDBProxy. To deregister targets from the proxy, you can call DeregisterDBProxyTargets.

Working with Amazon RDS Proxy endpoints

RDS Proxy endpoints provide flexible and efficient ways to manage database connections, which improves scalability, availability, and security. With proxy endpoints, you can:

- **Simplify monitoring and troubleshooting** – Use multiple endpoints to track and manage connections from different applications independently.
- **Enhance read scalability** – Leverage reader endpoints with Aurora DB clusters to distribute read traffic efficiently, which optimizes performance for query-heavy workloads.
- **Enable cross-VPC access** – Connect databases across VPCs using cross-VPC endpoints, which allows resources like Amazon EC2 instances in one VPC to access databases in another.

Topics

- Overview of proxy endpoints
- Limitations for proxy endpoints
- Using reader endpoints with Aurora clusters
- Accessing Aurora databases across VPCs
- Creating a proxy endpoint
- Viewing proxy endpoints
- Modifying a proxy endpoint
- Deleting a proxy endpoint

Overview of proxy endpoints

Working with RDS Proxy endpoints involves the same kinds of procedures as with Aurora DB cluster and reader endpoints. If you aren't familiar with Aurora endpoints, find more information in Amazon Aurora endpoint connections.

When you use RDS Proxy with an Aurora cluster, the default endpoint supports both read and write operations. This means it routes all requests to the cluster's writer instance, contributing to its `max_connections` limit. To better distribute traffic, you can create additional read/write or read-only endpoints for your proxy, which allows more efficient workload management and improved scalability.

Use a read-only endpoint with your proxy to handle read queries, just as you would with a reader endpoint for an Aurora provisioned cluster. This approach maximizes Aurora's read scalability by distributing queries across one or more reader DB instances. By using a read-only endpoint and adding more reader instances as needed, you can increase the number of simultaneous queries and connections that your cluster can handle.

> **Tip**
>
> When you create a proxy for an Aurora cluster using the Amazon Web Services Management Console, you can have RDS Proxy automatically create a reader endpoint. For information about the benefits of a reader endpoint, see Using reader endpoints with Aurora clusters.

When you create a proxy endpoint, you can associate it with a different virtual private cloud (VPC) than the proxy's VPC. This allows you to connect to the proxy from another VPC, such as one used by a different application within your organization.

For information about limits associated with proxy endpoints, see Limitations for proxy endpoints.

RDS Proxy logs prefix each entry with the name of the associated proxy endpoint. This can be either the name that you specified for a user-defined endpoint, or the special name `default` for the proxy's default read/write endpoint.

Each proxy endpoint has its own set of CloudWatch metrics. Monitor metrics for all proxy endpoints, a specific endpoint, or all read/write or read-only endpoints of a proxy. For more information, see Monitoring RDS Proxy metrics with Amazon CloudWatch.

A proxy endpoint uses the same authentication mechanism as its associated proxy. RDS Proxy automatically sets up permissions and authorizations for the user-defined endpoint, consistent with the properties of the associated proxy.

To learn how proxy endpoints work for DB clusters in an Aurora global database, see How RDS Proxy endpoints work with global databases.

Limitations for proxy endpoints

RDS Proxy endpoints have the following limitations:

- The RDS proxy default endpoint cannot be modified.
- The maximum number of user-defined endpoints for a proxy is 20. Thus, a proxy can have up to 21 endpoints: the default endpoint, plus 20 that you create.
- When you associate additional endpoints with a proxy, RDS Proxy automatically determines which DB instances in your cluster to use for each endpoint. You can't choose specific instances the way that you can with Aurora custom endpoints.
- For IPv6 or dual-stack endpoint network types, your VPC and subnets must be configured to support the selected network type.

When you create a proxy, RDS automatically creates a VPC endpoint for secure communication between applications and the database. The VPC endpoint is visible and can be accessed from the Amazon VPC Console.

Adding a new proxy endpoint provisions an Amazon PrivateLink interface endpoint. If you add one or more endpoints to your proxy, you incure additional charges. For more information, see RDS Proxy Pricing.

Using reader endpoints with Aurora clusters

You can create and connect to read-only endpoints called *reader endpoints* when you use RDS Proxy with Aurora clusters. These reader endpoints help to improve the read scalability of your query-intensive applications. Reader endpoints also help to improve the availability of your connections if a reader DB instance in your cluster becomes unavailable.

> **Note**
>
> When you specify that a new endpoint is read-only, RDS Proxy requires that the Aurora cluster has one or more reader DB instances. In some cases, you might change the target

of the proxy to an Aurora cluster containing only a single writer. If you do, any requests to the reader endpoint fail with an error. Requests also fail if the target of the proxy is an RDS instance instead of an Aurora cluster.
If an Aurora cluster has reader instances but those instances aren't available, RDS Proxy waits to send the request instead of returning an error immediately. If no reader instance becomes available within the connection borrow timeout period, the request fails with an error.

How reader endpoints help application availability

In some cases, one or more reader instances in your cluster might become unavailable. If so, connections that use a reader endpoint of a DB proxy can recover more quickly than ones that use the Aurora reader endpoint. RDS Proxy routes connections to only the available reader instances in the cluster. There isn't a delay due to DNS caching when an instance becomes unavailable.

If the connection is multiplexed, RDS Proxy directs subsequent queries to a different reader DB instance without any interruption to your application. During the automatic switchover to a new reader instance, RDS Proxy checks the replication lag of the old and new reader instances. RDS Proxy makes sure that the new reader instance is up to date with the same changes as the previous reader instance. That way, your application never sees stale data when RDS Proxy switches from one reader DB instance to another.

If the connection is pinned, the next query on the connection returns an error. However, your application can immediately reconnect to the same endpoint. RDS Proxy routes the connection to a different reader DB instance that's in `available` state. When you manually reconnect, RDS Proxy doesn't check the replication lag between the old and new reader instances.

If your Aurora cluster doesn't have any available reader instances, RDS Proxy checks whether this condition is temporary or permanent. The behavior in each case is as follows:

- Suppose that your cluster has one or more reader DB instances, but none of them are in the `Available` state. For example, all reader instances might be rebooting or encountering problems. In that case, attempts to connect to a reader endpoint wait for a reader instance to become available. If no reader instance becomes available within the connection borrow timeout period, the connection attempt fails. If a reader instance does become available, the connection attempt succeeds.

- Suppose that your cluster has no reader DB instances. In that case, RDS Proxy returns an error immediately if you try to connect to a reader endpoint. To resolve this problem, add one or more reader instances to your cluster before you connect to the reader endpoint.

How reader endpoints help query scalability

Reader endpoints for a proxy help with Aurora query scalability in the following ways:

- As you add reader instances to your Aurora cluster, RDS Proxy can route new connections to any reader endpoints to the different reader instances. That way, queries performed using one reader endpoint connection don't slow down queries performed using another reader endpoint connection. The queries run on separate DB instances. Each DB instance has its own compute resources, buffer cache, and so on.
- Where practical, RDS Proxy uses the same reader DB instance for all the queries issue using a particular reader endpoint connection. That way, a set of related queries on the same tables can take advantage of caching, plan optimization, and so on, on a particular DB instance.
- If a reader DB instance becomes unavailable, the effect on your application depends on whether the session is multiplexed or pinned. If the session is multiplexed, RDS Proxy routes any subsequent queries to a different reader DB instance without any action on your part. If the session is pinned, your application gets an error and must reconnect. You can reconnect to the reader endpoint immediately and RDS Proxy routes the connection to an available reader DB instance. For more information about multiplexing and pinning for proxy sessions, see Overview of RDS Proxy concepts.
- The more reader DB instances that you have in the cluster, the more simultaneous connections you can make using reader endpoints. For example, suppose that your cluster has four reader DB instances, each configured to support 200 simultaneous connections. Suppose also that your proxy is configured to use 50% of the maximum connections. Here, the maximum number of connections that you can make through the reader endpoints in the proxy is 100 (50% of 200) for reader 1. It's also 100 for reader 2, and so on, for a total of 400. If you double the number of cluster reader DB instances to eight, then the maximum number of connections through the reader endpoints also doubles, to 800.

Examples of using reader endpoints

The following Linux example shows how you can confirm that you're connected to an Aurora MySQL cluster through a reader endpoint. The `innodb_read_only` configuration setting is

enabled. Attempts to perform write operations such as `CREATE DATABASE` statements fail with an error. And you can confirm that you're connected to a reader DB instance by checking the DB instance name using the `aurora_server_id` variable.

> **Tip**
>
> Don't rely only on checking the DB instance name to determine whether the connection is read/write or read-only. Remember that DB instances in an Aurora cluster can change roles between writer and reader when failovers happen.

```
$ mysql -h endpoint-demo-reader.endpoint.proxy-demo.us-east-1.rds.amazonaws.com -u
 admin -p
...
mysql> select @@innodb_read_only;
+--------------------+
| @@innodb_read_only |
+--------------------+
|                  1 |
+--------------------+
mysql> create database shouldnt_work;
ERROR 1290 (HY000): The MySQL server is running with the --read-only option so it
 cannot execute this statement

mysql> select @@aurora_server_id;
+---------------------------------------+
| @@aurora_server_id                    |
+---------------------------------------+
| proxy-reader-endpoint-demo-instance-3 |
+---------------------------------------+
```

The following example shows how your connection to a proxy reader endpoint can keep working even when the reader DB instance is deleted. In this example, the Aurora cluster has two reader instances, `instance-5507` and `instance-7448`. The connection to the reader endpoint begins using one of the reader instances. During the example, this reader instance is deleted by a `delete-db-instance` command. RDS Proxy switches to a different reader instance for subsequent queries.

```
$ mysql -h reader-demo.endpoint.proxy-demo.us-east-1.rds.amazonaws.com
  -u my_user -p
```

```
...
mysql> select @@aurora_server_id;
+--------------------+
| @@aurora_server_id |
+--------------------+
| instance-5507      |
+--------------------+

mysql> select @@innodb_read_only;
+--------------------+
| @@innodb_read_only |
+--------------------+
|                  1 |
+--------------------+

mysql> select count(*) from information_schema.tables;
+----------+
| count(*) |
+----------+
|      328 |
+----------+
```

While the `mysql` session is still running, the following command deletes the reader instance that the reader endpoint is connected to.

```
aws rds delete-db-instance --db-instance-identifier instance-5507 --skip-final-snapshot
```

Queries in the `mysql` session continue working without the need to reconnect. RDS Proxy automatically switches to a different reader DB instance.

```
mysql> select @@aurora_server_id;
+--------------------+
| @@aurora_server_id |
+--------------------+
| instance-7448      |
+--------------------+

mysql> select count(*) from information_schema.TABLES;
+----------+
| count(*) |
+----------+
|      328 |
```

```
+----------+
```

Accessing Aurora databases across VPCs

By default, the components of your Aurora technology stack are all in the same Amazon VPC. For example, suppose that an application running on an Amazon EC2 instance connects to an Aurora DB cluster. In this case, the application server and database must both be within the same VPC.

With RDS Proxy, you can set up access to an Aurora DB cluster in one VPC from resources in another VPC, such as EC2 instances. For example, your organization might have multiple applications that access the same database resources. Each application might be in its own VPC.

To enable cross-VPC access, you create a new endpoint for the proxy. The proxy itself resides in the same VPC as the Aurora DB cluster. However, the cross-VPC endpoint resides in the other VPC, along with the other resources such as the EC2 instances. The cross-VPC endpoint is associated with subnets and security groups from the same VPC as the EC2 and other resources. These associations let you connect to the endpoint from the applications that otherwise can't access the database due to the VPC restrictions.

The following steps explain how to create and access a cross-VPC endpoint through RDS Proxy:

1. Create two VPCs, or choose two VPCs that you already use for Aurora work. Each VPC should have its own associated network resources such as an internet gateway, route tables, subnets, and security groups. If you only have one VPC, you can consult Getting started with Amazon Aurora for the steps to set up another VPC to use Aurora successfully. You can also examine your existing VPC in the Amazon EC2 console to see the kinds of resources to connect together.
2. Create a DB proxy associated with the Aurora DB cluster that you want to connect to. Follow the procedure in Creating a proxy for Amazon Aurora.
3. On the **Details** page for your proxy in the RDS console, under the **Proxy endpoints** section, choose **Create endpoint**. Follow the procedure in Creating a proxy endpoint.
4. Choose whether to make the cross-VPC endpoint read/write or read-only.
5. Instead of accepting the default of the same VPC as the Aurora DB cluster, choose a different VPC. This VPC must be in the same Amazon Region as the VPC where the proxy resides.
6. Now instead of accepting the defaults for subnets and security groups from the same VPC as the Aurora DB cluster, make new selections. Make these based on the subnets and security groups from the VPC that you chose.

7. You don't need to change any of the settings for the Secrets Manager secrets. The same credentials work for all endpoints for your proxy, regardless of which VPC each endpoint is in. Similarly, when using IAM authentication, your IAM configuration and permissions work consistently across all proxy endpoints, even when endpoints are in different VPCs. No additional IAM configuration is required per endpoint.
8. Wait for the new endpoint to reach the **Available** state.
9. Make a note of the full endpoint name. This is the value ending in *`Region_name`*`.rds.amazonaws.com` that you supply as part of the connection string for your database application.
10. Access the new endpoint from a resource in the same VPC as the endpoint. A simple way to test this process is to create a new EC2 instance in this VPC. Then, log into the EC2 instance and run the `mysql` or `psql` commands to connect by using the endpoint value in your connection string.

Creating a proxy endpoint

To create a proxy endpoint, follow these instructions:

Console

To create a proxy endpoint

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Proxies**.
3. Choose the name of the proxy that you want to create a new endpoint for.

   The details page for that proxy appears.
4. In the **Proxy endpoints** section, choose **Create proxy endpoint**.

   The **Create proxy endpoint** window appears.
5. For **Proxy endpoint name**, enter a descriptive name of your choice.
6. For **Target role**, choose whether to make the endpoint read/write or read-only.

   Connections that use read/write endpoints can perform any kind of operations, such as data definition language (DDL) statements, data manipulation language (DML) statements, and queries. These endpoints always connect to the primary instance of the Aurora cluster. You can use read/write endpoints for general database operations when you only use a single endpoint

in your application. You can also use read/write endpoints for administrative operations, online transaction processing (OLTP) applications, and extract-transform-load (ETL) jobs.

Connections that use a read-only endpoint can only perform queries. When there are multiple reader instances in the Aurora cluster, RDS Proxy can use a different reader instance for each connection to the endpoint. That way, a query-intensive application can take advantage of Aurora's clustering capability. You can add more query capacity to the cluster by adding more reader DB instances. These read-only connections don't impose any overhead on the primary instance of the cluster. That way, your reporting and analysis queries don't slow down the write operations of your OLTP applications.

7. For **Virtual Private Cloud (VPC)**, choose the default to access the endpoint from the same EC2 instances or other resources that normally use to access the proxy or its associated database. To set up cross-VPC access for this proxy, choose a VPC other than the default. For more information about cross-VPC access, see Accessing Aurora databases across VPCs.
8. For **Endpoint network type**, choose the IP version for the proxy endpoint. The available options are:

   - **IPv4** – The proxy endpoint uses IPv4 addresses only (default).
   - **IPv6** – The proxy endpoint uses IPv6 addresses only.
   - **Dual-stack** – The proxy endpoint supports both IPv4 and IPv6 addresses.

   To use IPv6 or dual-stack, your VPC and subnets must be configured to support the selected network type.
9. For **Subnets**, RDS Proxy fills in the same subnets as the associated proxy by default. To restrict access to the endpoint to only a portion of the VPC's address range being able to connect to it, remove one or more subnets.
10. For **VPC security group**, you can choose an existing security group or create a new one. RDS Proxy fills in the same security group or groups as the associated proxy by default. If the inbound and outbound rules for the proxy are appropriate for this endpoint, then keep the default choice.

    If you choose to create a new security group, specify a name for the security group on this page. Then edit the security group settings from the EC2 console later.
11. Choose **Create proxy endpoint**.

Amazon CLI

To create a proxy endpoint, use the Amazon CLI create-db-proxy-endpoint command.

Include the following required parameters:

- `--db-proxy-name` *value*
- `--db-proxy-endpoint-name` *value*
- `--vpc-subnet-ids` *list_of_ids*. Separate the subnet IDs with spaces. You don't specify the ID of the VPC itself.

You can also include the following optional parameters:

- `--target-role { READ_WRITE | READ_ONLY }`. This parameter defaults to `READ_WRITE`. The `READ_ONLY` value affects only Aurora provisioned clusters that contain one or more reader DB instances. When the proxy is associated with an Aurora cluster that only contains a writer DB instance, you can't specify `READ_ONLY`. For more information about the intended use of read-only endpoints with Aurora clusters, see Using reader endpoints with Aurora clusters .
- `--vpc-security-group-ids` *value*. Separate the security group IDs with spaces. If you omit this parameter, RDS Proxy uses the default security group for the VPC. RDS Proxy determines the VPC based on the subnet IDs that you specify for the `--vpc-subnet-ids` parameter.
- `--endpoint-network-type { IPV4 | IPV6 | DUAL }`. This parameter specifies the IP version for the proxy endpoint. The default is `IPV4`. To use `IPV6` or `DUAL`, your VPC and subnets must be configured to support the selected network type.

Example

The following example creates a proxy endpoint named `my-endpoint`.

For Linux, macOS, or Unix:

```
aws rds create-db-proxy-endpoint \
  --db-proxy-name my-proxy \
  --db-proxy-endpoint-name my-endpoint \
  --vpc-subnet-ids subnet_id subnet_id subnet_id ... \
  --target-role READ_ONLY \
  --vpc-security-group-ids security_group_id \
  --endpoint-network-type DUAL
```

For Windows:

```
aws rds create-db-proxy-endpoint ^
  --db-proxy-name my-proxy ^
  --db-proxy-endpoint-name my-endpoint ^
  --vpc-subnet-ids subnet_id_1 subnet_id_2 subnet_id_3 ... ^
  --target-role READ_ONLY ^
  --vpc-security-group-ids security_group_id ^
  --endpoint-network-type DUAL
```

RDS API

To create a proxy endpoint, use the RDS API CreateDBProxyEndpoint action.

Viewing proxy endpoints

To view existing proxy endpoints, follow these instructions:

Console

To view the details for a proxy endpoint

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Proxies**.
3. In the list, choose the proxy whose endpoint you want to view. Choose the proxy name to view its details page.
4. In the **Proxy endpoints** section, choose the endpoint that you want to view. Click its name to view the details page.
5. Examine the parameters whose values you're interested in. You can check properties such as the following:

   - Whether the endpoint is read/write or read-only.
   - The endpoint address that you use in a database connection string.
   - The VPC, subnets, and security groups associated with the endpoint.

Amazon CLI

To view one or more proxy endpoints, use the Amazon CLI describe-db-proxy-endpoints command.

You can include the following optional parameters:

- `--db-proxy-endpoint-name`
- `--db-proxy-name`

The following example describes the `my-endpoint` proxy endpoint.

Example

For Linux, macOS, or Unix:

```
aws rds describe-db-proxy-endpoints \
  --db-proxy-endpoint-name my-endpoint
```

For Windows:

```
aws rds describe-db-proxy-endpoints ^
  --db-proxy-endpoint-name my-endpoint
```

RDS API

To describe one or more proxy endpoints, use the RDS API DescribeDBProxyEndpoints operation.

Modifying a proxy endpoint

To modify your proxy endpoints, follow these instructions:

Console

To modify one or more proxy endpoints

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Proxies**.
3. In the list, choose the proxy whose endpoint you want to modify. Choose the proxy name to view its details page.
4. In the **Proxy endpoints** section, choose the endpoint that you want to modify. You can select it in the list, or click its name to view the details page.

5. On the proxy details page, under the **Proxy endpoints** section, choose **Edit**. Or, on the proxy endpoint details page, for **Actions**, choose **Edit**.
6. Change the values of the parameters that you want to modify.
7. Choose **Save changes**.

Amazon CLI

To modify a proxy endpoint, use the Amazon CLI modify-db-proxy-endpoint command with the following required parameters:

- `--db-proxy-endpoint-name`

Specify changes to the endpoint properties by using one or more of the following parameters:

- `--new-db-proxy-endpoint-name`
- `--vpc-security-group-ids`. Separate the security group IDs with spaces.

The following example renames the `my-endpoint` proxy endpoint to `new-endpoint-name`.

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-proxy-endpoint \
  --db-proxy-endpoint-name my-endpoint \
  --new-db-proxy-endpoint-name new-endpoint-name
```

For Windows:

```
aws rds modify-db-proxy-endpoint ^
  --db-proxy-endpoint-name my-endpoint ^
  --new-db-proxy-endpoint-name new-endpoint-name
```

RDS API

To modify a proxy endpoint, use the RDS API ModifyDBProxyEndpoint operation.

Deleting a proxy endpoint

To delete an endpoint for your proxy, follow these instructions:

> **Note**
>
> You can't delete the default proxy endpoint that RDS Proxy automatically creates for each proxy.
> When you delete a proxy, RDS Proxy automatically deletes all the associated endpoints.

Console

To delete a proxy endpoint using the Amazon Web Services Management Console

1. In the navigation pane, choose **Proxies**.
2. In the list, choose the proxy whose endpoint you want to endpoint. Choose the proxy name to view its details page.
3. In the **Proxy endpoints** section, choose the endpoint that you want to delete. You can select one or more endpoints in the list, or choose the name of a single endpoint to view the details page.
4. On the proxy details page, under the **Proxy endpoints** section, choose **Delete**. Or, on the proxy endpoint details page, for **Actions**, choose **Delete**.

Amazon CLI

To delete a proxy endpoint, run the delete-db-proxy-endpoint command with the following required parameters:

- `--db-proxy-endpoint-name`

The following command deletes the proxy endpoint named `my-endpoint`.

For Linux, macOS, or Unix:

```
aws rds delete-db-proxy-endpoint \
  --db-proxy-endpoint-name my-endpoint
```

For Windows:

```
aws rds delete-db-proxy-endpoint ^
  --db-proxy-endpoint-name my-endpoint
```

RDS API

To delete a proxy endpoint with the RDS API, run the DeleteDBProxyEndpoint operation. Specify the name of the proxy endpoint for the `DBProxyEndpointName` parameter.

Monitoring RDS Proxy metrics with Amazon CloudWatch

You can monitor RDS Proxy by using Amazon CloudWatch. CloudWatch collects and processes raw data from the proxies into readable, near-real-time metrics. To find these metrics in the CloudWatch console, choose **Metrics**, then choose **RDS**, and choose **Per-Proxy Metrics**. For more information, see Using Amazon CloudWatch metrics in the Amazon CloudWatch User Guide.

You can also use the monitoring dashboard available in the RDS Proxy console. The dashboard provides a pre-configured set of metrics arranged into widgets, designed to help you perform common observability and troubleshooting tasks. For more information, see RDS Proxy monitoring dashboard.

> **Note**
>
> RDS publishes these metrics for each underlying Amazon EC2 instance associated with a proxy. A single proxy might be served by more than one EC2 instance. Use CloudWatch statistics to aggregate the values for a proxy across all the associated instances.
> Some of these metrics might not be visible until after the first successful connection by a proxy.

In the RDS Proxy logs, each entry is prefixed with the name of the associated proxy endpoint. This name can be the name you specified for a user-defined endpoint, or the special name `default` for the default endpoint of a proxy that performs read/write requests.

All RDS Proxy metrics are in the group `proxy`.

Each proxy endpoint has its own CloudWatch metrics. You can monitor the usage of each proxy endpoint independently. For more information about proxy endpoints, see Working with Amazon RDS Proxy endpoints.

You can aggregate the values for each metric using one of the following dimension sets. For example, by using the `ProxyName` dimension set, you can analyze all the traffic for a particular proxy. By using the other dimension sets, you can split the metrics in different ways. You can split the metrics based on the different endpoints or target databases of each proxy, or the read/write and read-only traffic to each database.

- Dimension set 1: `ProxyName`
- Dimension set 2: `ProxyName`, `EndpointName`
- Dimension set 3: `ProxyName`, `TargetGroup`, `Target`
- Dimension set 4: `ProxyName`, `TargetGroup`, `TargetRole`

Metric	Description	Valid period	CloudWatch dimension set
`AvailabilityPercentage`	The percentage of time for which the target group was available in the role indicated by the dimension. This metric is reported every minute. The most useful statistic for this metric is `Average`.	1 minute	Dimension set 4
`ClientConnections`	The current number of client connections, including those in setup. This metric is reported every minute. The most useful statistic for this metric is `Sum`.	1 minute	Dimension set 1, Dimension set 2

Metric	Description	Valid period	CloudWatch dimension set
ClientConnectionsClosed	The number of client connections closed. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 1, Dimension set 2
ClientConnectionsInSetup	The current number of client connections open but have not completed setup. This metric is reported every minute. The most useful statistic for this metric is Sum.	1 minute	Dimension set 1, Dimension set 2
ClientConnectionsNoTLS	The current number of established client connections without Transport Layer Security (TLS). This metric is reported every minute. The most useful statistic for this metric is Sum.	1 minute	Dimension set 1, Dimension set 2
ClientConnectionsReceived	The number of client connection requests received. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 1, Dimension set 2

Metric	Description	Valid period	CloudWatch dimension set
ClientConnectionsSetupFailedAuth	The number of client connection attempts that failed due to misconfigured authentication or TLS. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 1, Dimension set 2
ClientConnectionsSetupSucceeded	The number of client connections successfully established with any authentication mechanism with or without TLS. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 1, Dimension set 2
ClientConnectionsTLS	The current number of established client connections with TLS. This metric is reported every minute. The most useful statistic for this metric is Sum.	1 minute	Dimension set 1, Dimension set 2
DatabaseConnectionRequests	The number of requests to create a database connection. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 1, Dimension set 3, Dimension set 4

Metric	Description	Valid period	CloudWatch dimension set
DatabaseConnectionRequestsWithTLS	The number of requests to create a database connection with TLS. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 1, Dimension set 3, Dimension set 4
DatabaseConnections	The current number of database connections, including those in setup. This metric is reported every minute. The most useful statistic for this metric is Sum.	1 minute	Dimension set 1, Dimension set 3, Dimension set 4
DatabaseConnectionsBorrowLatency	The time in microseconds that it takes for the proxy being monitored to get a database connection. The most useful statistic for this metric is Average.	1 minute and above	Dimension set 1, Dimension set 2
DatabaseConnectionsBorrowRequests	The number of requests to borrow a database connection from the pool. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 4

Metric	Description	Valid period	CloudWatch dimension set
DatabaseConnectionsBorrowRequestsAborted	The number of borrow requests that were aborted because the client connection was closed before a database connection could be obtained. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 4
DatabaseConnectionsCurrentlyBorrowed	The current number of database connections in the borrow state. This metric is reported every minute. The most useful statistic for this metric is Sum.	1 minute	Dimension set 1, Dimension set 3, Dimension set 4
DatabaseConnectionsCurrentlyInTransaction	The current number of database connections in a transaction. This metric is reported every minute. The most useful statistic for this metric is Sum.	1 minute	Dimension set 1, Dimension set 3, Dimension set 4

Metric	Description	Valid period	CloudWatch dimension set
DatabaseConnectionsCurrentlySessionPinned	The current number of database connections currently pinned because of operations in client requests that change session state. This metric is reported every minute. The most useful statistic for this metric is Sum.	1 minute	Dimension set 1, Dimension set 3, Dimension set 4
DatabaseConnectionsSetupFailed	The number of database connection requests that failed. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 1, Dimension set 3, Dimension set 4
DatabaseConnectionsSetupSucceeded	The number of database connections successfully established with or without TLS. The most useful statistic for this metric is Sum.	1 minute and above	Dimension set 1, Dimension set 3, Dimension set 4

Metric	Description	Valid period	CloudWatch dimension set
DatabaseConnectionsWithTLS	The current number of established database connections with TLS. This metric is reported every minute. The most useful statistic for this metric is Sum.	1 minute	Dimension set 1, Dimension set 3, Dimension set 4
MaxDatabaseConnectionsAllowed	The maximum number of database connections allowed. This metric is reported every minute. The most useful statistic for this metric is Sum.	1 minute	Dimension set 1, Dimension set 3, Dimension set 4
QueryDatabaseResponseLatency	The time in microseconds that the database took to respond to the query. The most useful statistic for this metric is Average. **Note:** Does not include data for PostgreSQL workload using Extended Protocol.	1 minute and above	Dimension set 1, Dimension set 2, Dimension set 3, Dimension set 4

Metric	Description	Valid period	CloudWatch dimension set
QueryRequests	The number of queries received. A query including multiple statements is counted as one query. The most useful statistic for this metric is Sum. **Note:** Does not include data for PostgreSQL workload using Extended Protocol.	1 minute and above	Dimension set 1, Dimension set 2
QueryRequestsNoTLS	The number of queries received from non-TLS connections. A query including multiple statements is counted as one query. The most useful statistic for this metric is Sum. **Note:** Does not include data for PostgreSQL workload using Extended Protocol.	1 minute and above	Dimension set 1, Dimension set 2

Metric	Description	Valid period	CloudWatch dimension set
QueryRequestsTLS	The number of queries received from TLS connections. A query including multiple statements is counted as one query. The most useful statistic for this metric is Sum. **Note:** Does not include data for PostgreSQL workload using Extended Protocol.	1 minute and above	Dimension set 1, Dimension set 2
QueryResponseLatency	The time in microseconds between getting a query request and the proxy responding to it. The most useful statistic for this metric is Average. **Note:** Does not include data for PostgreSQL workload using Extended Protocol.	1 minute and above	Dimension set 1, Dimension set 2


You can find logs of RDS Proxy activity under CloudWatch in the Amazon Web Services Management Console. Each proxy has an entry in the **Log groups** page.

Important

These logs are intended for human consumption for troubleshooting purposes and not for programmatic access. The format and content of the logs is subject to change.
In particular, older logs don't contain any prefixes indicating the endpoint for each request. In newer logs, each entry is prefixed with the name of the associated proxy endpoint. This name can be the name that you specified for a user-defined endpoint, or the special name `default` for requests using the default endpoint of a proxy.

RDS Proxy monitoring dashboard

You can access the RDS Proxy monitoring dashboard under the Monitoring tab of your proxy.

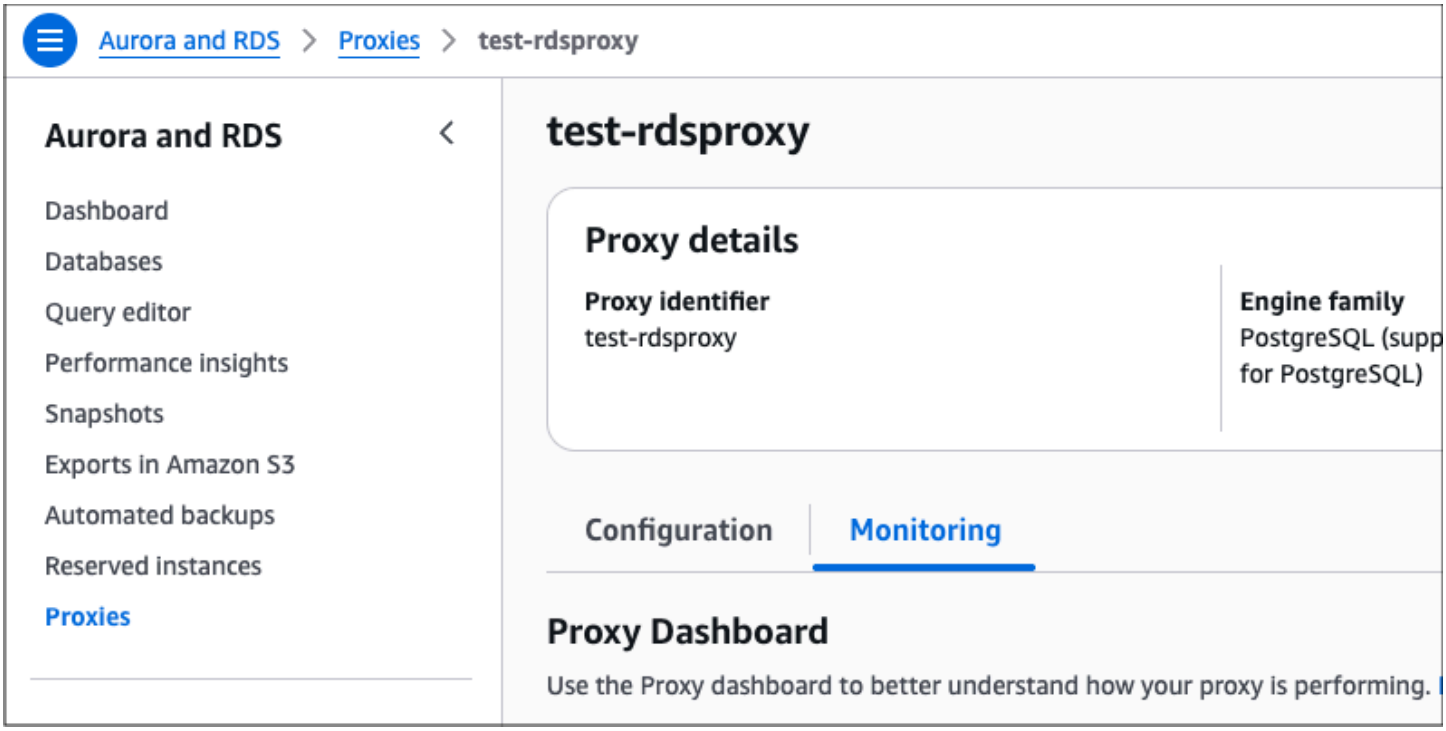

The dashboard provides a pre-configured set of metrics arranged into widgets, designed to help you perform common observability and troubleshooting tasks. If a metric is not visible in this dashboard, you can view all metrics in CloudWatch using a link on the dashboard.

You can't add or remove metrics from the default dashboard. If you want to create custom monitoring views for your proxies, you can do so directly in CloudWatch. For more information, see Using CloudWatch dashboards.

The monitoring dashboard is divided into several sections, with metrics grouped into widgets using predefined aggregations. For more information about the underlying RDS Proxy metrics, see Monitoring RDS Proxy metrics with CloudWatch.

Topics

- Overview
- Latency
- Connection pool
- Database connections utilization

Overview

Availability % by role

The percentage of time for which the target was available in the `READWRITE` and `READ_ONLY` roles, based on an aggregation of the `AvailabilityPercentage` metric.

The availability metric describes the success rate of the database health checks performed by the proxy, which reflects the health status of the target database instances. This widget uses the `Average` statistic for each role, and the calculation is influenced by the number of database instances in a given role (one for the `READWRITE` role, potentially multiple for `READ_ONLY` roles) and the number of nodes in your proxy (decided by RDS Proxy infrastructure).

> **Note**
>
> RDS Proxy automatically adjusts its capacity based on the configuration of DB instances registered with it. You can't directly control the number of nodes in your proxy, but you can check the current node count using the `sample count` statistic for the availability metric. For more information on how RDS Proxy adjusts its capacity, see Planning for IP address capacity.

The `READWRITE` target role can only contain one database instance, and the availability percentage is calculated as the average health check success rate across all proxy nodes. For example, if the proxy contains four nodes and one of them didn't receive a successful health check response in a given period, read/write availability will be reported as 75% for that period. Similarly,

if the proxy contains four nodes and none of them were able to run health checks for 30 seconds during a 1-minute period, the proxy will report 50% availability during that minute.

The `READ_ONLY` target role can contain multiple database instances, such as multiple replicas in an Aurora cluster. From the perspective of each RDS Proxy node, the read-only role is considered available if any of the target instances passes a health check. Availability is then averaged across all proxy nodes, and the final number is presented in the widget. Consider this example of a proxy containing four nodes:

- Each proxy node performs a health check on multiple read-only targets (database instances) where some checks succeed and some fail. A proxy node will report the read-only role as available as long as it receives a successful health check response from at least one target instance.
- Four proxy nodes perform health checks on multiple read-only targets. Three proxy nodes can connect to at least one target, but one proxy node is unable to connect to any of the targets. The read-only role availability will be calculated as an `Average` of role availability reported by the proxy nodes: `(100% + 100% + 100% + 0% )/ 4 = 75%`

> **Note**
>
> The RDS Proxy `READ_ONLY` target role is supported with Aurora clusters or Amazon RDS Multi-AZ DB cluster deployments with two readable standbys, but not with Amazon RDS DB instance deployments with read replicas. Availability for the `READ_ONLY` role might show "zero" if the proxy doesn't contain a read-only target.

The role availability widget is most useful in the following scenarios:

- Diagnosing connection errors, when you want to quickly assess whether availability was impacted due to the health of proxy nodes or target database instances.
- Diagnosing high traffic events, when the database didn't experience definite unavailability but the proxy's health check metrics can support the hypothesis of a database overload. RDS Proxy uses a number of persistent connections reserved for monitoring and health check duties, so if database metrics don't indicate downtime but the proxy's health checks are intermittently failing, it might be an indicator of excessive database load.
- Identifying configuration issues that prevent the proxy from connecting to target instances. For example, if you see a drop in proxy availability metrics but the target instances appear healthy

according to other signals, it might indicate an issue with network ACLs associated with the proxy's subnets or a misconfiguration of the Security Group(s) attached to target database instances.

When diagnosing issues involving RDS Proxy availability metrics, you must also review health and utilization indicators from the database itself. The proxy's availability calculations are influenced by the database's ability to respond to health checks, so you must gather information from both sides before forming conclusions.

Database connections utilization % by role

The percentage utilization of the proxy's connection pool for each role, calculated as `DatabaseConnections` divided by `MaxDatabaseConnectionsAllowed`.

The maximum number of database connections allowed refers to the proxy's maximum pool size controlled by the `MaxConnectionsPercent` setting, which in turn depends on the database connection limit such as the `max_connections` parameter. For more information about this setting, see RDS Proxy connection considerations.

> **Note**
>
> RDS Proxy reserves a portion of the `MaxConnectionsPercent` quota for internal monitoring connections. The total number of reserved connections is not a constant, but it depends on the number of internal proxy nodes and the number of target database instances.

We recommend keeping at least a 30% headroom between the number of connections allowed and the maximum number of database connections expected during peak load. This headroom improves client experience during unexpected workload spikes and helps RDS Proxy redistribute connections across its internal infrastructure for heat management and other purposes. To help you follow this recommendation, the connections utilization widget includes a fixed guide line at 70% of the maximum.

For example, assume you have an Aurora PostgreSQL cluster with one writer and two readers with a `max_connections` setting of 500 for each instance, and a proxy configured with `MaxConnectionsPercent` of 50:

1. RDS Proxy reserves a number of connections for monitoring purposes, which means that the `MaxDatabaseConnectionsAllowed` is less than 250 per instance: `(max_connections=500 * MaxConnectionsPercent=50%) - reserved connections`
2. For the `READWRITE` role containing one writer, the maximum size of the proxy connection pool will be slightly less than 250 (`50% * 500 - reserved_connections`), and the 70% guide line will correspond to less than 175 connections (`70% * 250 - reserved connections`).
3. For the `READ_ONLY` role containing two readers, the maximum size of the proxy connection pool will be slightly less than 500 (`2 * 50% * 500 - reserved_connections`), and the 70% guide line will correspond to less than 350 connections (`70% * 500 - reserved connections`).

This widget serves as a general indicator of connection utilization, and it's a useful starting point during certain troubleshooting scenarios. For example:

- Frequent and sharp variations in connection utilization could indicate that the `MaxIdleConnectionsPercent` setting is too low, and you could reduce connection churn by allowing idle connections to remain open for a longer period.
- Based on your workload patterns and client activity, you might develop a high-level expectation for how many connections are in use at any given time. The widget can help you validate those expectations and detect potential client issues. Consider a situation where your `MaxIdleConnectionsPercent` setting is very low but the connection utilization is consistently very high. This might indicate that clients are rarely idle (which is not necessarily a problem) but it might also mean that connections are being pinned and thus aren't subject to idleness checks.
- In the absence of issues with pinning or proxy configuration, high database connection utilization could mean that the database's `max_connections` setting needs to be raised or, in case of the read-only role, the cluster could use more read replicas.

Latency breakdown

The latency of connection borrows and query responses.

Label	Description	Source
`DatabaseConnectionsBorrowLatency`	The time it takes for the proxy to get a database connection, whether it's an existing one	RDS Proxy, `DatabaseConnectionsBorrowLatency` metric

Label	Description	Source
	from the pool or a new one that had to be opened against the database.	
QueryResponseLatency	The time between getting a query request and the proxy responding to it.	RDS Proxy, QueryResponseLatency metric
QueryDatabaseResponseLatency	The time that the database took to respond to the query, including network latency between the proxy and the database.	RDS Proxy, QueryDatabaseResponseLatency metric

This widget helps you understand the average response time of your queries and how the proxy layer contributes to the total latency. The borrow latency metric can be particularly useful for detecting pool congestion, which is when client requests are waiting because there aren't enough connections readily available in the pool.

Data points for these metrics are published only if the value is greater than zero, which means that the widget might contain gaps during periods without query traffic.

Client connections

The number of connections between the clients and the proxy, broken down by connection state.

Label	Description	Source
ClientConnectionsReceived	The number of client connection requests received.	RDS Proxy, ClientConnectionsReceived metric
ClientConnectionsSetupSucceeded	The number of client connections successfully established.	RDS Proxy, ClientConnectionsSetupSucceeded metric

Label	Description	Source
`ClientConnectionsSetupFailedAuth`	The number of client connection attempts that failed due to misconfigured authentication or TLS.	RDS Proxy, `ClientConnectionsSetupFailedAuth` metric
`ClientConnectionsClosed`	The number of client connections closed.	RDS Proxy, `ClientConnectionsClosed` metric

This widget can help you assess the throughput and status of client connections by showing multiple client connections metrics on a single chart. It can be useful for monitoring the overall success rate of client connections and observing the rate at which connections are opened and closed. This can be helpful in detecting connection storms and changes in client activity over time.

Proxy workload

The number of query requests per proxy endpoint, based on the `QueryRequests` proxy metrics.

The data series labels vary depending on the endpoint:

- The default read/write proxy endpoint uses the `default` label.
- If you enabled the optional read-only endpoint while creating the proxy through the Amazon Management Console, this endpoint uses the `read-only` label prefixed with the proxy name. For a proxy named `my-proxy`, the label will be `my-proxy-read-only`.
- Additional proxy endpoints use the endpoint name as the label without additional prefixes.

This widget is useful for monitoring the volume of workload handled through each of the proxy endpoints.

> **Important**
>
> The `QueryRequests` metric is currently not emitted for query activity on PostgreSQL connections using the Extended Query Protocol.

Latency

Database response latency by target

The database response latency per target (database instance), based on the `QueryDatabaseResponseLatency` proxy metric.

This widget is useful for monitoring database response latency for each database instance under the proxy, especially when you use different database instances for different workloads or the instance sizes aren't identical. Consider the following examples:

- A database cluster contains multiple read replicas, all of which receive traffic through the proxy. Additionally, some of the replicas receive traffic directly from clients bypassing the proxy. The widget can help you determine whether that additional traffic is impacting query latency for workloads handled through the proxy.
- A database cluster contains replicas of different sizes, the entire workload is handled through the proxy, and the database instances use default connection configuration where the connection limit is proportional to instance size. The proxy follows connection limits and sends proportionally fewer connections to smaller instances, but those instances might produce higher latency as a result of their caches and buffers also being smaller. The widget can help you determine whether that is the case, and whether small instances are keeping up with larger ones in terms of query latency.

Connection pool

Database connections pinned % by role

The percentage of database connections pinned for each role, calculated as `DatabaseConnectionsCurrentlySessionPinned` divided by `DatabaseConnections`.

This widget is useful for monitoring connection pinning in your workload. Similar to other widgets, the relative value is used here as a more suitable health indicator than the absolute number of connections pinned. An ideal value is zero, but connection pinning might not be entirely avoidable in all workloads. You might be comfortable with a small percentage of connections experiencing pinning as long as they don't cause discernible impact on the rest of the workload. However, if a large portion of the entire workload experiences pinning, it might indicate an issue with client behavior that prevents RDS Proxy from multiplexing connections (reusing them between transactions).

To learn more about connection pinning, see Avoiding pinning an RDS Proxy.

Database connections setup metrics by role

The number of connections setups between the proxy and the database, broken down by setup outcome and target role. The widget shows multiple data series for each role:

Label	Description	Source
`DatabaseConnectionRequests`	The number of requests to create a database connection.	RDS Proxy, `DatabaseConnectionRequests` metric
`DatabaseConnectionsSetupSucceeded`	The number of database connections successfully established.	RDS Proxy, `DatabaseConnectionsSetupSucceeded` metric
`DatabaseConnectionsSetupFailed`	The number of database connection requests that failed.	RDS Proxy, `DatabaseConnectionsSetupFailed` metric

Data points for these metrics are published only if the value is greater than zero, which means that the widget might contain gaps during periods without a relevant event. For example, if a client runs queries through the proxy during a given period, and the proxy can handle the entirety of the traffic by reusing existing back-end database connections (without opening new connections), you won't see data points for that period.

This widget is useful for observing activity and connection churn between the proxy and the database. When paired with the information shown on the **Client Connections** widget, you can use it to assess the efficiency of connection pooling and multiplexing inside the proxy.

Keep in mind that RDS Proxy doesn't preallocate the entire connection pool at its maximum capacity, and it closes idle database connections after a period of inactivity. It's normal for `DatabaseConnectionRequests` to be above zero and fluctuate under load, but it's the ratio of `DatabaseConnectionRequests` to `ClientConnectionsReceived` that might require your attention. For example:

- If the clients open a certain number of connections to the proxy and the proxy is opening almost the same number of connections to the database in each period, you can reason that

the proxy isn't able to reuse connections due to pinning or other reasons. This situation might require further investigation, focusing on client behavior that prevents the proxy from reusing connections.

- If the clients open a certain number of connections to the proxy, but new database connections are only a fraction of that number, it shows that the proxy handles the vast majority of the traffic by reusing existing connections. This is the normal, desired state of the connection pool.

Database connections setup metrics by target

An equivalent of **Database Connections Setup Metrics By Role** with the data broken down by target (database instance).

Database connections utilization

Database connections utilization % by target

The percentage utilization of the proxy's connection pool for each target (database instance), calculated as `DatabaseConnections` divided by `MaxDatabaseConnectionsAllowed`.

This widget is similar to **Database Connections Utilization % By Role**, but it provides a granular view of connection utilization for each database instance. It can be useful for verifying fair connection distribution in the `READ_ONLY` role for database clusters with multiple instances.

For example, assume you have an Aurora cluster with two readers and `MaxDatabaseConnectionsAllowed` of 500 per reader. If the number of proxy connections is 100 on the first reader and 125 on the second reader, the widget will show 20% connection utilization for the first reader and 25% for the second one.

> **Note**
>
> RDS Proxy attempts to equalize the number of client connections on each replica, weighted by the database's connection limit. It doesn't load-balance traffic based on database metrics such as CPU utilization, and it doesn't know how long each client session will last after it's opened. As a result, a small imbalance in connection utilization between instances is a normal phenomenon.

Database connections usage by READWRITE/READ_ONLY role

The number of database connections utilized and allowed by the proxy and the database. There are two widgets of this type: one for the `READWRITE` role and one for the `READ_ONLY` role.

This widget is only visible if the proxy's database target supports a `READ_ONLY` role, which includes Aurora DB clusters and Amazon RDS Multi-AZ DB cluster deployments. The widget is not shown for Amazon RDS DB instance deployments.

Each widget contains multiple data series:

Label	Description	Source
`Database Connections`	The number of connections that exist in the database, whether opened by the proxy or other clients.	Database, `DatabaseConnections` metric
`Database Connections: proxy`	The number of database connections that exist between the proxy and the database, excluding internal connections used by RDS Proxy for database monitoring.	RDS Proxy, `DatabaseConnections` metric
`MaxDatabaseConnectionsAllowed: Proxy`	Maximum number of database connections allowed by the proxy, controlled by the `MaxConnectionsPercent` setting.	RDS Proxy, `MaxDatabaseConnectionsAllowed` metric

The figures presented are sums (totals) for the proxy and the underlying database cluster. For example, assume that the database cluster contains two instances allowing 1000 connections each and the proxy is configured with `MaxConnectionsPercent` of `20`. In this scenario, `MaxDatabaseConnectionsAllowed: Proxy` will show `2 * 1000 * 20% = 400` minus a number of connections reserved internally by RDS Proxy for monitoring purposes. The actual value will be less than `400`, and it will vary depending on the number of nodes in your proxy.

This widget is most useful in the following situations:

- Monitoring the absolute connection utilization figures for the proxy and the database.
- Determining the number of connections reaching the database through the proxy versus connections bypassing the proxy.
- Calculating the difference between current connection utilization and the maximum allowed utilization.

> **Note**
>
> The value of `DatabaseConnections` will be higher than `Database Connections: Proxy` even if all client connections are handled through the proxy. There's always a number of internal connections maintained by the RDS platform and the RDS Proxy infrastructure. Those connections are counted by the database, but are not reflected in the proxy metrics.

Working with RDS Proxy events

An *event* indicates a change in an environment such as an Amazon environment or a service or application from a software as a service (SaaS) partner. Or, it can be one of your own custom applications or services. For example, Amazon Aurora generates an event when you create or modify an RDS Proxy. Amazon Aurora delivers events to Amazon EventBridge in near-real time. Following, you can find a list of RDS Proxy events that you can subscribe to and an example of an RDS Proxy event.

For more information about working with events, see the following:

- For instructions on how to view events by using the Amazon Web Services Management Console, Amazon CLI, or RDS API, see Viewing Amazon RDS events.
- To learn how to configure Amazon Aurora to send events to EventBridge, see Creating a rule that triggers on an Amazon Aurora event.

RDS Proxy events

The following table shows the event category and a list of events when an RDS Proxy is the source type.

Category	RDS event ID	Message	Notes
configuration change	RDS-EVENT-0204	RDS modified DB proxy *name*.	None
configuration change	RDS-EVENT-0207	RDS modified the end point of the DB proxy *name*.	None
configuration change	RDS-EVENT-0213	RDS detected the addition of the DB instance and automatically added it to the target group of the DB proxy *name*.	None
configuration change	RDS-EVENT-0214	RDS detected deletion of DB instance *name* and automatically removed it from target group *name* of DB proxy *name*.	None
configuration change	RDS-EVENT-0215	RDS detected deletion of DB cluster *name* and automatically removed it from target group *name* of DB proxy *name*.	None
creation	RDS-EVENT-0203	RDS created DB proxy *name*.	None
creation	RDS-EVENT-0206	RDS created endpoint *name* for DB proxy *name*.	None
deletion	RDS-EVENT-0205	RDS deleted DB proxy *name*.	None
deletion	RDS-EVENT-0208	RDS deleted endpoint *name* for DB proxy *name*.	None

Category	RDS event ID	Message	Notes
failure	RDS-EVENT-0243	RDS failed to provision capacity for proxy *name* because there aren't enough IP addresses available in your subnets: *name*. To fix the issue, make sure that your subnets have the minimum number of unused IP addresses as recommend ed in the RDS Proxy documentation.	To determine the recommended number for your instance class, see Planning for IP address capacity.
failure	RDS-EVENT-0275	RDS throttled some connections to DB proxy *name*. The number of simultaneous connection requests from the client to the proxy has exceeded the limit.	None

The following is an example of an RDS Proxy event in JSON format. The event shows that RDS modified the endpoint named `my-endpoint` of the RDS Proxy named `my-rds-proxy`. The event ID is RDS-EVENT-0207.

```
{
  "version": "0",
  "id": "68f6e973-1a0c-d37b-f2f2-94a7f62ffd4e",
  "detail-type": "RDS DB Proxy Event",
  "source": "aws.rds",
  "account": "123456789012",
  "time": "2018-09-27T22:36:43Z",
  "region": "us-east-1",
  "resources": [
     "arn:aws:rds:us-east-1:123456789012:db-proxy:my-rds-proxy"
  ],
```

```
  "detail": {
    "EventCategories": [
      "configuration change"
    ],
    "SourceType": "DB_PROXY",
    "SourceArn": "arn:aws:rds:us-east-1:123456789012:db-proxy:my-rds-proxy",
    "Date": "2018-09-27T22:36:43.292Z",
    "Message": "RDS modified endpoint my-endpoint of DB Proxy my-rds-proxy.",
    "SourceIdentifier": "my-endpoint",
    "EventID": "RDS-EVENT-0207"
  }
}
```

RDS Proxy command-line examples

To see how combinations of connection commands and SQL statements interact with RDS Proxy, look at the following examples.

Examples

- Preserving Connections to a MySQL Database Across a Failover
- Adjusting the max_connections Setting for an Aurora DB Cluster

Example Preserving connections to a MySQL database across a failover

This MySQL example demonstrates how open connections continue working during a failover. An example is when you reboot a database or it becomes unavailable due to a problem. This example uses a proxy named `the-proxy` and an Aurora DB cluster with DB instances `instance-8898` and `instance-9814`. When you run the `failover-db-cluster` command from the Linux command line, the writer instance that the proxy is connected to changes to a different DB instance. You can see that the DB instance associated with the proxy changes while the connection remains open.

```
$ mysql -h the-proxy.proxy-demo.us-east-1.rds.amazonaws.com -u admin_user -p
Enter password:
...

mysql> select @@aurora_server_id;
+--------------------+
| @@aurora_server_id |
+--------------------+
```

```
| instance-9814      |
+--------------------+
1 row in set (0.01 sec)

mysql>
[1]+  Stopped                 mysql -h the-proxy.proxy-demo.us-east-1.rds.amazonaws.com
 -u admin_user -p
$ # Initially, instance-9814 is the writer.
$ aws rds failover-db-cluster --db-cluster-identifier cluster-56-2019-11-14-1399
JSON output
$ # After a short time, the console shows that the failover operation is complete.
$ # Now instance-8898 is the writer.
$ fg
mysql -h the-proxy.proxy-demo.us.us-east-1.rds.amazonaws.com -u admin_user -p

mysql> select @@aurora_server_id;
+--------------------+
| @@aurora_server_id |
+--------------------+
| instance-8898      |
+--------------------+
1 row in set (0.01 sec)

mysql>
[1]+  Stopped                 mysql -h the-proxy.proxy-demo.us-east-1.rds.amazonaws.com
 -u admin_user -p
$ aws rds failover-db-cluster --db-cluster-identifier cluster-56-2019-11-14-1399
JSON output
$ # After a short time, the console shows that the failover operation is complete.
$ # Now instance-9814 is the writer again.
$ fg
mysql -h the-proxy.proxy-demo.us-east-1.rds.amazonaws.com -u admin_user -p

mysql> select @@aurora_server_id;
+--------------------+
| @@aurora_server_id |
+--------------------+
| instance-9814      |
+--------------------+
1 row in set (0.01 sec)
+---------------+---------------+
| Variable_name | Value         |
+---------------+---------------+
| hostname      | ip-10-1-3-178 |
```

```
+---------------+---------------+
1 row in set (0.02 sec)
```

Example Adjusting the max_connections setting for an Aurora DB cluster

This example demonstrates how you can adjust the `max_connections` setting for an Aurora MySQL DB cluster. To do so, you create your own DB cluster parameter group based on the default parameter settings for clusters that are compatible with MySQL 5.7. You specify a value for the `max_connections` setting, overriding the formula that sets the default value. You associate the DB cluster parameter group with your DB cluster.

```
export REGION=us-east-1
export CLUSTER_PARAM_GROUP=rds-proxy-mysql-57-max-connections-demo
export CLUSTER_NAME=rds-proxy-mysql-57

aws rds create-db-parameter-group --region $REGION \
  --db-parameter-group-family aurora-mysql5.7 \
  --db-parameter-group-name $CLUSTER_PARAM_GROUP \
  --description "Aurora MySQL 5.7 cluster parameter group for RDS Proxy demo."

aws rds modify-db-cluster --region $REGION \
  --db-cluster-identifier $CLUSTER_NAME \
  --db-cluster-parameter-group-name $CLUSTER_PARAM_GROUP

echo "New cluster param group is assigned to cluster:"
aws rds describe-db-clusters --region $REGION \
  --db-cluster-identifier $CLUSTER_NAME \
  --query '*[*].{DBClusterParameterGroup:DBClusterParameterGroup}'

echo "Current value for max_connections:"
aws rds describe-db-cluster-parameters --region $REGION \
  --db-cluster-parameter-group-name $CLUSTER_PARAM_GROUP \
  --query '*[*].{ParameterName:ParameterName,ParameterValue:ParameterValue}' \
  --output text | grep "^max_connections"

echo -n "Enter number for max_connections setting: "
read answer

aws rds modify-db-cluster-parameter-group --region $REGION --db-cluster-parameter-
group-name $CLUSTER_PARAM_GROUP \
  --parameters "ParameterName=max_connections,ParameterValue=$
$answer,ApplyMethod=immediate"
```

```
echo "Updated value for max_connections:"
aws rds describe-db-cluster-parameters --region $REGION \
  --db-cluster-parameter-group-name $CLUSTER_PARAM_GROUP \
  --query '*[*].{ParameterName:ParameterName,ParameterValue:ParameterValue}' \
  --output text | grep "^max_connections"
```

Troubleshooting for RDS Proxy

Following, you can find troubleshooting ideas for some common RDS Proxy issues and information on CloudWatch logs for RDS Proxy.

In the RDS Proxy logs, each entry is prefixed with the name of the associated proxy endpoint. This name can be the name that you specified for a user-defined endpoint. Or, it can be the special name `default` for the default endpoint of a proxy that performs read/write requests. For more information about proxy endpoints, see Working with Amazon RDS Proxy endpoints.

Topics

- Verifying connectivity for a proxy
- Common issues and solutions
- Troubleshooting RDS Proxy issues with RDS for MySQL
- Troubleshooting RDS Proxy issues with RDS for PostgreSQL

Verifying connectivity for a proxy

You can use the following commands to verify that all components such as the proxy, database, and compute instances in the connection can communicate with the each other.

Examine the proxy itself using the describe-db-proxies command. Also examine the associated target group using the describe-db-proxy-target-groups command. Check that the details of the targets match the Aurora cluster that you intend to associate with the proxy. Use commands such as the following.

```
aws rds describe-db-proxies --db-proxy-name $DB_PROXY_NAME
aws rds describe-db-proxy-target-groups --db-proxy-name $DB_PROXY_NAME
```

To confirm that the proxy can connect to the underlying database, examine the targets specified in the target groups using the describe-db-proxy-targets command. Use a command such as the following.

```
aws rds describe-db-proxy-targets --db-proxy-name $DB_PROXY_NAME
```

The output of the describe-db-proxy-targets command includes a `TargetHealth` field. You can examine the fields `State`, `Reason`, and `Description` inside `TargetHealth` to check if the proxy can communicate with the underlying DB instance.

- A `State` value of `AVAILABLE` indicates that the proxy can connect to the DB instance.
- A `State` value of `UNAVAILABLE` indicates a temporary or permanent connection problem. In this case, examine the `Reason` and `Description` fields. For example, if `Reason` has a value of `PENDING_PROXY_CAPACITY`, try connecting again after the proxy finishes its scaling operation. If `Reason` has a value of `UNREACHABLE`, `CONNECTION_FAILED`, or `AUTH_FAILURE`, use the explanation from the `Description` field to help you diagnose the issue.
- The `State` field might have a value of `REGISTERING` for a brief time before changing to `AVAILABLE` or `UNAVAILABLE`.

If the following Netcat command (nc) is successful, you can access the proxy endpoint from the EC2 instance or other system where you're logged in. This command reports failure if you're not in the same VPC as the proxy and the associated database. You might be able to log directly in to the database without being in the same VPC. However, you can't log into the proxy unless you're in the same VPC.

```
nc -zx MySQL_proxy_endpoint 3306

nc -zx PostgreSQL_proxy_endpoint 5432
```

You can use the following commands to make sure that your EC2 instance has the required properties. In particular, the VPC for the EC2 instance must be the same as the VPC for the RDS DB instance Aurora cluster that the proxy connects to.

```
aws ec2 describe-instances --instance-ids your_ec2_instance_id
```

Examine the Secrets Manager secrets used for the proxy.

```
aws secretsmanager list-secrets
aws secretsmanager get-secret-value --secret-id your_secret_id
```

Make sure that the `SecretString` field displayed by `get-secret-value` is encoded as a JSON string that includes the `username` and `password` fields. The following example shows the format of the `SecretString` field.

```
{
  "ARN": "some_arn",
  "Name": "some_name",
  "VersionId": "some_version_id",
  "SecretString": '{"username":"some_username","password":"some_password"}',
  "VersionStages": [ "some_stage" ],
  "CreatedDate": some_timestamp
}
```

When troubleshooting IAM authentication issues, verify the following:

- The database has IAM authentication enabled.
- The proxy is configured with the correct authentication scheme.
- The IAM policies in the IAM role provided to the proxy grant the necessary `rds-db:connect` permission to the appropriate database and its username.
- For end-to-end IAM authentication, database users exist that match the IAM user or role names.
- SSL/TLS is enabled for the connection.

Common issues and solutions

This section describes some common issues and potential solutions when using RDS Proxy.

After running the `aws rds describe-db-proxy-targets` CLI command, if the `TargetHealth` description states `Proxy does not have any registered credentials`, verify the following:

- There are credentials registered for the user to access the proxy.
- The IAM role to access the Secrets Manager secret used by the proxy is valid.

You might encounter the following RDS events while creating or connecting to a DB proxy.

Category	RDS event ID	Description
failure	RDS-EVENT-0243	RDS couldn't provision capacity for the proxy because there aren't enough IP addresses available in your subnets. To fix the issue, make sure that your subnets have the minimum number of unused IP addresses. To determine the recommend ed number for your instance class, see Planning for IP address capacity.
failure	RDS-EVENT-0275	RDS throttled some connectio ns to DB proxy *name*. The number of simultaneous connection requests from the client to the proxy has exceeded the limit.

You might encounter the following issues while creating a new proxy or connecting to a proxy.

Error	Causes or workarounds
`403: The security token included in the request is invalid`	Select an existing IAM role instead of choosing to create a new one.

Troubleshooting RDS Proxy issues with RDS for MySQL

You might encounter the following issues while connecting to a MySQL proxy.

Error	Causes or workarounds
`ERROR 1040 (HY000): Connections rate limit exceeded (limit_value )`	The rate of connection requests from the client to the proxy has exceeded the limit.
`ERROR 1040 (HY000): IAM authentication rate limit exceeded`	The number of simultaneous requests with IAM authentication from the client to the proxy has exceeded the limit.
`ERROR 1040 (HY000): Number simultane ous connectio ns exceeded (limit_value )`	The number of simultaneous connection requests from the client to the proxy exceeded the limit.
`ERROR 1045 (28000): Access denied for user 'DB_USER'@'%' (usi password: YES)`	The Secrets Manager secret used by the proxy doesn't match the user name and password of an existing database user. Either update the credentials in the Secrets Manager secret, or make sure the database user exists and has the same password as in the secret.
`ERROR 1105 (HY000): Unknown error`	An unknown error occurred.
`ERROR 1231 (42000): Variable ''charact er_set_cl`	The value set for the `character_set_client` parameter is not valid. For example, the value `ucs2` is not valid because it can crash the MySQL server.

Error	Causes or workarounds
`ient'' can't be set to the value of value`	
`ERROR 3159 (HY000): This RDS Proxy requires TLS connections.`	You enabled the setting **Require Transport Layer Security** in the proxy but your connection included the parameter `ssl-mode=DISABLED` in the MySQL client. Do either of the following: • Disable the setting **Require Transport Layer Security** for the proxy. • Connect to the database using the minimum setting of `ssl-mode=REQUIRED` in the MySQL client.
`ERROR 2026 (HY000): SSL connection error: Internal Server Error`	The TLS handshake to the proxy failed. Some possible reasons include the following: • SSL is required but the server doesn't support it. • An internal server error occurred. • A bad handshake occurred.
`ERROR 9501 (HY000): Timed-out waiting to acquire database connection`	The proxy timed-out waiting to acquire a database connection. Some possible reasons include the following: • The proxy is unable to establish a database connection because the maximum connections have been reached • The proxy is unable to establish a database connection because the database is unavailable.

Troubleshooting RDS Proxy issues with RDS for PostgreSQL

You might encounter the following issues while connecting to a PostgreSQL proxy.

Error	Cause	Solution
`ERROR 28000: IAM authentication is`	The user tried to connect to the database using IAM	The user needs to connect to the database using

Error	Cause	Solution
`allowed only with SSL connections.`	authentication with the setting `sslmode=disable` in the PostgreSQL client.	the minimum setting of `sslmode=require` in the PostgreSQL client. For more information, see the PostgreSQL SSL support documentation.
`ERROR 28000: This RDS proxy has no credentials for the role` *`role_name`* `. Check the credentials for this role and try again.`	There is no Secrets Manager secret for this role.	Add a Secrets Manager secret for this role. For more information, see Configuring IAM authentication for RDS Proxy.
`ERROR 28000: RDS supports only IAM, MD5, or SCRAM authentication.`	The database client being used to connect to the proxy is using an authentication mechanism not currently supported by the proxy.	If you're not using IAM authentication, use the MD5 or SCRAM password authentication.
`ERROR 28000: A user name is missing from the connection startup packet. Provide a user name for this connection.`	The database client being used to connect to the proxy isn't sending a user name when trying to establish a connection.	Make sure to define a user name when setting up a connection to the proxy using the PostgreSQL client of your choice.
`ERROR 28000: IAM is allowed only with SSL connections.`	A client tried to connect using IAM authentication, but SSL wasn't enabled.	Enable SSL in the PostgreSQL client.

Error	Cause	Solution
`ERROR 28000: This RDS Proxy requires TLS connections.`	The user enabled the option **Require Transport Layer Security** but tried to connect with `sslmode=disable` in the PostgreSQL client.	To fix this error, do one of the following: • Disable the proxy's **Require Transport Layer Security** option. • Connect to the database using the minimum setting of `sslmode=allow` in the PostgreSQL client.
`ERROR 28P01: IAM authentication failed for user` *`user_name`* `. Check the IAM token for this user and try again.`	This error might be due to the following reasons: • The client supplied the incorrect IAM user name. • The client supplied an incorrect IAM authorization token for the user. • The client is using an IAM policy that does not have the necessary permissions. • The client supplied an expired IAM authorization token for the user.	To fix this error, do the following: 1. Confirm that the provided IAM user exists. 2. Confirm that the IAM authorization token belongs to the provided IAM user. 3. Confirm that the IAM policy has adequate permissions for RDS. 4. Check the validity of the IAM authorization token used.
`ERROR 28P01: The password that was provided for the role` *`role_name`* `is wrong.`	The password for this role doesn't match the Secrets Manager secret.	Check the secret for this role in Secrets Manager to see if the password is the same as what's being used in your PostgreSQL client.

Error	Cause	Solution
`ERROR 28P01: The IAM authentication failed for the role` *`role_name`* `. Check the IAM token for this role and try again.`	There is a problem with the IAM token used for IAM authentication.	Generate a new authentic ation token and use it in a new connection.
`ERROR 0A000: Feature not supported: RDS Proxy supports only version 3.0 of the PostgreSQL messaging protocol.`	The PostgreSQL client used to connect to the proxy uses a protocol older than 3.0.	Use a newer PostgreSQL client that supports the 3.0 messaging protocol. If you're using the PostgreSQL `psql` CLI, use a version greater than or equal to 7.4.
`ERROR 0A000: Feature not supported: RDS Proxy currently doesn't support streaming replication mode.`	The PostgreSQL client used to connect to the proxy is trying to use the streaming replication mode, which isn't currently supported by RDS Proxy.	Turn off the streaming replication mode in the PostgreSQL client being used to connect.
`ERROR 0A000: Feature not supported: RDS Proxy currently doesn't support the option` *`option_name`* `.`	Through the startup message, the PostgreSQL client used to connect to the proxy is requesting an option that isn't currently supported by RDS Proxy.	Turn off the option being shown as not supported from the message above in the PostgreSQL client being used to connect.
`ERROR 53300: The IAM authentication failed because of too many competing requests.`	The number of simultaneous requests with IAM authentic ation from the client to the proxy has exceeded the limit.	Reduce the rate in which connections using IAM authentication from a PostgreSQL client are established.

Error	Cause	Solution
`ERROR 53300: The maximum number of client connections to the proxy exceeded` *`number_value`* `.`	The number of simultaneous connection requests from the client to the proxy exceeded the limit.	Reduce the number of active connections from PostgreSQL clients to this RDS proxy.
`ERROR 53300: Rate of connection to proxy exceeded` *`number_value`* `.`	The rate of connection requests from the client to the proxy has exceeded the limit.	Reduce the rate in which connections from a PostgreSQL client are established.
`ERROR XX000: Unknown error.`	An unknown error occurred.	Reach out to Amazon Support to investigate the issue.

Error	Cause	Solution
`ERROR 08000: Timed-out waiting to acquire database connection.`	The proxy timed-out waiting to acquire a database connection within the duration specified by the `ConnectionBorrowTimeout` setting. Some possible reasons include the following: • The proxy can't establish a database connection because the maximum connections have been reached. • The proxy can't establish a database connection because the database is unavailable or if connection establishment to the database takes longer than the configured `ConnectionBorrowTimeout` .	Possible solutions are the following: • Avoid pinning proxy connections. See Avoiding pinning an RDS Proxy. • Review `ConnectionBorrowTimeout` and `MaxConnectionsPercent` settings. See RDS Proxy connection considerations. • Review target availability. See `AvailabilityPercentage` in Monitoring RDS Proxy metrics with Amazon CloudWatch.

Error	Cause	Solution
`ERROR XX000: Request returned an error: database_error .`	The database connection established from the proxy returned an error.	The solution depends on the specific database error. One example is: `Request returned an error: database "your-database-name" does not exist`. This means that the specified database name doesn't exist on the database server. Or it means that the user name used as a database name (if a database name isn't specified) doesn't exist on the server.
`ERROR 53300: The IAM authentication failed because of too many competing requests.`	The number of simultaneous requests with IAM authentication from the client to the proxy has exceeded the limit.	Reduce the rate in which connections using IAM authentication from a PostgreSQL client are established.
`ERROR 28000: Enable IAM authentication for the client connection to the proxy and try again.`	RDS Proxy can't connect to the database because IAM authentication isn't enabled for the client connection to the proxy. This occurs when the proxy's `DefaultAuthScheme` parameter is set to `IAM_AUTH` with a registered user, but the client is using password authentication instead of IAM authentication.	Enable IAM authentication for the client connection to the proxy and try again.

Error	Cause	Solution
`ERROR 28000: Configure IAM authentication as the DefaultAuthScheme in your proxy and try again.`	RDS Proxy can't connect to the database because the `DefaultAuthScheme` isn't set to `IAM_AUTH`. The proxy's `DefaultAuthScheme` parameter is set to `NONE`, but the client is attempting to use IAM authentication.	Set `DefaultAuthScheme` to `IAM_AUTH` for your proxy and try again.

Troubleshooting deleted `postgres` database

If you mistakenly delete the `postgres` database from your instance, you need to restore the database to restore connectivity to your instance. Run the following commands within your DB instance:

```
CREATE DATABASE postgres;
GRANT CONNECT ON DATABASE postgres TO rdsproxyadmin;
```

Using RDS Proxy with Amazon CloudFormation

You can use RDS Proxy with Amazon CloudFormation. This helps you to create groups of related resources. Such a group can include a proxy that can connect to a newly created Aurora DB cluster. RDS Proxy support in Amazon CloudFormation involves two new registry types: `DBProxy` and `DBProxyTargetGroup`.

The following listing shows a sample Amazon CloudFormation template for RDS Proxy.

```
Resources:
 DBProxy:
   Type: Amazon::RDS::DBProxy
   Properties:
     DBProxyName: CanaryProxy
     EngineFamily: MYSQL
     RoleArn:
      Fn::ImportValue: SecretReaderRoleArn
     Auth:
```

```
      - {AuthScheme: SECRETS, SecretArn: !ImportValue ProxySecret, IAMAuth: DISABLED}
    VpcSubnetIds:
      Fn::Split: [",", "Fn::ImportValue": SubnetIds]

ProxyTargetGroup:
  Type: Amazon::RDS::DBProxyTargetGroup
  Properties:
    DBProxyName: CanaryProxy
    TargetGroupName: default
    DBInstanceIdentifiers:
      - Fn::ImportValue: DBInstanceName
  DependsOn: DBProxy
```

For more information about the resources in this sample, see DBProxy and DBProxyTargetGroup.

For more information about resources that you can create using Amazon CloudFormation, see RDS resource type reference.

Using RDS Proxy with Blue/Green Deployments

Amazon RDS Proxy can be used with Blue/Green Deployments to reduce switchover downtime. RDS Proxy eliminates DNS propagation delays that typically occur during database transitions by maintaining awareness of the switchover process and automatically redirecting connections to the Green environment once it becomes the active production environment. RDS Proxy works seamlessly with Aurora database engines, and requires no application code changes or custom client drivers.

Switchover when using RDS Proxy

When your blue cluster is attached to RDS Proxy, the following process occurs during switchover:

- Switchover Guardrails
  - Amazon RDS runs additional guardrail checks to validate that the proxy can successfully reach both blue and green environments and is ready for switchover.
- Application Traffic Routing During Switchover

  For the list of switchover actions, see Switchover actions. When the switchover happens through RDS Proxy, note the following considerations:

- During switchover, the Blue database enters read-only mode before Green environment is promoted. RDS Proxy continues routing connections to the blue database during this transitional period.
- Write operations on Aurora MySQL during this period may return read-only errors. For example `1290 (HY000): The MySQL server is running with the –read-only option` so it cannot execute this statement. On Aurora PostgreSQL read and write queries will return AdminShutdown terminating connection due to administrator command.
- Once the switchover is detected, the proxy automatically routes traffic to the newly promoted green environment.
- When the Green environment is promoted as the new writer, existing connections to the proxy are dropped. Applications must re-establish connections after the promotion is complete.
- You can review CloudWatch logs for RDS Proxy to see when this transitional behavior occurred.

- RDS Proxy API Behavior
  - Proxy APIs such as `describe-db-proxy-targets` reflect the updated targets only after the switchover is fully complete, even though traffic routing occurs earlier.

Limitations

- Your blue cluster must already be a target of the proxy before you create the blue/green deployment. You cannot add a blue cluster to an RDS Proxy after a blue/green deployment has been created for that cluster.
- RDS Proxy with blue/green deployments is not supported for Aurora Global Databases.

Using RDS Proxy with Aurora global databases

An *Aurora global database* is a single database that spans multiple Amazon Web Services Regions, allowing for low-latency global reads and disaster recovery from any Region-wide outage. It provides built-in fault tolerance for your deployment because the DB instance relies not on a single Amazon Web Services Region, but upon multiple Regions and different Availability Zones. For more information, see Using Amazon Aurora Global Database.

You can use RDS Proxy with any DB cluster in an Aurora global database. Before you begin to use these features together, make sure that you familiarize yourself with the following information.

Important

If the DB cluster is part of a global database with write forwarding turned on, reduce your proxy's `MaxConnectionsPercent` value by the quota that's allotted for write forwarding. The write forwarding quota is set in the DB cluster parameter `aurora_fwd_writer_max_connections_pct`. For information about write forwarding, see Using write forwarding in an Amazon Aurora global database.

Limitations for RDS Proxy with global databases

- When write forwarding is enabled on an Aurora MySQL Global Database secondary cluster, RDS Proxy doesn't support the `SESSION` value for the `aurora_replica_read_consistency` parameter. Setting this value can cause unexpected behavior.
- When write forwarding is enabled on an Aurora PostgreSQL Global Database secondary cluster, RDS Proxy doesn't support the `SESSION` value for the `apg_write_forward.consistency_mode` parameter. Setting this value can cause unexpected behavior.

How RDS Proxy endpoints work with global databases

When you understand how RDS Proxy endpoints work with global databases, you can better manage your applications that use Aurora databases with both of these features.

For a proxy with a global database's primary cluster as the registered target, the proxy endpoints work the same way as with any Aurora DB cluster. The proxy's read/write endpoints send all requests to the writer instance of the cluster. The proxy's read-only endpoints send all requests to the reader instances. If a reader becomes unavailable while a connection is open, RDS Proxy redirects subsequent queries on the connection to another reader instance. For a proxy with a secondary cluster as the registered target, requests that are sent to the proxy's read-only endpoints are also sent to the reader instances. Because the cluster has no writer instances, requests that are sent to read/write endpoints fail with the error "`The target group doesn't have any associated read/write instances`".

Global database switchover and failover operations both involve a role switch between the primary and one of the secondary DB clusters. When the selected secondary cluster becomes the new primary, one of its reader instances is promoted to a writer. This DB instance is now the new writer

instance for the global cluster. Make sure to redirect your application's write operations to the appropriate read/write endpoint of the proxy that's associated with the new primary cluster. This proxy endpoint might be the default endpoint or a custom read/write endpoint.

RDS Proxy queues all requests through read/write endpoints and sends them to the writer instance of the new primary cluster as soon as it's available. It does so regardless of whether the switchover or failover operation has completed. During switchover or failover, the default endpoint of the proxy for the old primary cluster still accepts write operations. However, as soon as that cluster becomes a secondary cluster, all of the write operations fail. To learn how and when to perform specific global switchover or failover tasks, see the following topics:

- Global database switchover – Performing switchovers for Amazon Aurora global databases
- Global database failover – Recovering an Amazon Aurora global database from an unplanned outage

Best practices with RDS Proxy

This section provides guidelines on Amazon RDS Proxy best practices and usage scenarios. Information provided here will help you understand the benefits of using RDS Proxy in various use cases and optimize your application and database configuration for best results.

Topics

- Common usage scenarios
- Application and workload considerations
- Configuration guidelines

Common usage scenarios

Topics

- Application scalability
- High availability
- Using multiple proxies with one target

Application scalability

Connection handling in serverless and event-driven applications

Serverless and event-driven applications, such as APIs and web services backed by Amazon Lambda, must often support a large number of short-lived client requests. This usage pattern can cause connection churn on the database side with no possibility to implement connection pooling on the application side. Database performance could become degraded due to the number of concurrent connections alone, or the database might exceed its connection limit leading to client-facing errors.

In these scenarios, RDS Proxy can bring the following benefits:

1. It offloads the cost of establishing connections from the database to the proxy, and provides connection pooling and multiplexing to translate a large number of client connections to a much smaller number of back-end database connections. This helps reduce connection overhead and database contention, particularly in database engines such as PostgreSQL where the cost of establishing and maintaining connections is relatively high.
2. It can handle connection surges more gracefully. For example, when a database exceeds its connection limit, it immediately returns an error to the client. When RDS Proxy needs to borrow a connection from the pool but the pool is already at capacity, the proxy can wait for a connection to become available. This capability can improve client experience by turning hard errors into a slight increase in query latency.
3. With the configurable connection pool size, you can also use RDS Proxy as a throttling or load shedding mechanism. If the number of connections exceeds the limits you specify, RDS Proxy waits for a connection to become available within a configurable timeout. This can be useful in cases where the database serves multiple workloads, and you want to limit the amount of pressure a particular workload can create on the database.

Connection handling in container-based distributed applications

A container-based distributed application architecture may have hundreds or even thousands of containers, each running a copy of the application code. Even if the individual containers are capable of connection pooling, those pools are container-specific and therefore very small. The number of containers multiplied by the size of each container mini-pool can potentially exceed connection limits on your Amazon RDS or Aurora databases.

In this situation, RDS Proxy's ability to perform connection pooling (reusing connections) and multiplexing (serving multiple clients using one back-end connection) is most valuable. You can still use connection pooling inside each container to reduce churn between the application threads and RDS Proxy, but the proxy can help bring the number of back-end database connections down to a manageable level.

Improving read replica utilization

Read-heavy databases may require multiple read replicas to support read-only traffic. Applications can use their own logic for choosing which replica to connect to or, more commonly, they use a DNS-based round-robin mechanism such as the Aurora cluster reader endpoint. However, a DNS-based approach can lead to uneven replica utilization as a result of DNS caching. For example, clients could "pin" themselves to a particular replica, they could fail to recognize new replicas being added to the cluster, or they might try connecting to replicas that no longer exist.

When you use an RDS Proxy read-only endpoint, the proxy routes client connections between all available replicas using a "least outstanding connections" logic. RDS Proxy does not load-balance traffic based on database metrics such as CPU utilization, but it attempts to equalize the number of client connections on each replica, weighted by the database's connection limit. For example, if you have three Aurora replicas running with a `max_connections` setting of 500, 500, and 1000 (respectively), the proxy tries to send roughly twice the number of connections to the third replica versus to the other two.

You can use RDS Proxy reader endpoints with Aurora clusters or Amazon RDS Multi-AZ DB cluster deployments with two readable standbys. Proxy reader endpoints aren't supported for Amazon RDS DB instance deployments with read replicas.

Improving connection efficiency

When introducing a proxy between client applications and the database, your goal is typically to increase the efficiency of connection handling while also considering the latency cost of an additional network hop through the proxy. An additional intermediate layer can seem counterintuitive for improving connection efficiency because any connection that would have been opened directly against the database is now opened against the proxy. The protocol handshake steps are the same in both cases, so if you're still spending resources on connection handshakes, it might not be obvious where the efficiency improvements come from.

The proxy doesn't necessarily make connections cheaper to establish. Instead, it moves most of the burden of handshake handling from the database layer to the proxy layer. When you pay for database resources, you want those resources to be spent on database work and not on auxiliary

overhead. This becomes particularly important when using encrypted connections: although the overhead of transmitting encrypted data over an existing connection is not significant, the initial overhead of setting up an encrypted connection is substantial. In environments that churn through hundreds or thousands of connections per second, that extra effort can quickly add up. You might not want to spend that CPU time on (relatively expensive) database resources and instead offload them to (comparatively cheap) proxy layer.

Regarding the latency introduced by an additional network hop, the degree to which it matters depends on how "chatty" your application is and how many statements it runs per each "conversation" with the database. In RDS Proxy, you typically observe added latency in the low single-digit milliseconds, but it won't necessarily cause a visible impact on your applications. For example:

- A workload where query execution times are in the order of tens or hundreds of milliseconds (or more) is unlikely to notice the proxy overhead because it's a small fraction of the total query time.
- An application that runs single-digit millisecond or sub-millisecond queries can notice a difference because the query overhead (one additional network hop per query) is substantial compared to the query execution time. This might not be an issue if a client session only involves a handful of queries, so that the cumulative overhead is still small.

If the added latency in your situation is both noticeable and undesirable, you must weigh it against the other benefits of using a proxy (pooling, multiplexing, failover handling).

High availability

Multi-AZ databases running on Amazon RDS and Aurora (excluding Aurora DSQL) use failover mechanisms to restore availability in case of issues with the primary database instance. Failovers are also used as part of operational workflows, such as compute scaling for the primary instance. A failover involves a DNS change that moves the primary (read/write-capable) database endpoint from the previous primary instance to the newly promoted one. This DNS change must be observed and recognized by client applications, so that the clients can follow the primary without delay.

Some applications can struggle with the timely recognition of DNS changes as a result of DNS caching in the operating system or at the application level. While it's a best practice to address DNS caching issues at the application level, it's not always feasible due to application complexity or the cost of introducing changes.

In this scenario, RDS Proxy is an effective way to avoid DNS-related failover delays. The read/write endpoints and the optional read-only endpoints provided by RDS Proxy are "stable" in the sense that the IP addresses behind those endpoints don't change when database instances exchange their roles. RDS Proxy continuously tracks the topology of the back-end database and abstracts instance role changes from the clients.

There are alternative ways of handling DNS caching issues, such as by using advanced drivers directly capable of detecting the database topology without relying on DNS. However, it might be easier to deploy a single proxy in front of the database instead of introducing code changes and new drivers at the application level.

Read availability

In addition to improving client experience during database failovers, RDS Proxy also helps with application availability in case of read replica issues. It does so in two ways:

1. If a read replica becomes unavailable, but there are other replicas available in the cluster, the proxy can route new connections to the available replicas. The clients don't need to worry about DNS propagation delays or DNS caching.
2. For an existing client connection that is multiplexed, the proxy can send subsequent queries from that connection to a different replica that's available. In this situation, the client might not even notice that a back-end replica experienced an issue. When using this technique, RDS Proxy ensures that the new replica isn't behind the previous one in terms of replication lag. That way, subsequent queries sent by the client won't see data that could be considered stale.

Using multiple proxies with one target

As a best practice, use one RDS Proxy per database target such as an Amazon RDS instance or an Aurora cluster. This works well in most scenarios, it keeps the configuration simple, and it makes the client experience more predictable. By comparison, using multiple proxies requires you to carefully align the configuration across all proxies to avoid unexpected behavior. For example, you must ensure that the combined size of all proxy pools doesn't exceed the connection limits of the single database target.

You might still explore the idea of using multiple proxies in certain situations. The following sections discuss the most common scenarios and outline the pros and cons of a single proxy versus a multi-proxy approach.

Proxy availability

The RDS Proxy infrastructure is highly available and deployed over multiple Availability Zones (AZs) by design. The proxy capacity is distributed across many nodes with continuous health monitoring, and it is automatically adjusted based on the provisioned instance size or the Serverless v2 maximum ACU settings of your database. As a result of the proxy's distributed Multi-AZ design, you don't need to run multiple proxies in front of your Amazon RDS or Aurora clusters for the purpose of high availability.

In fact, using multiple proxies in front of a single database target means that the application stack is now responsible for detecting and reacting to issues instead of relying on the robust mechanisms built into the proxy. Consequently, using multiple proxies for high availability reasons is strongly discouraged as it's likely to introduce more issues than it can solve.

Handling multiple client pools

Each proxy provides one read/write endpoint and (optionally) additional read/write or read-only endpoints. When a single proxy is used to handle multiple groups of clients or multiple workloads, those workloads can potentially interfere. For example, one workload can monopolize the connection pool to the point where there aren't enough free connections left to handle other workloads. Using separate proxies to isolate workloads could be a compelling solution, but you can consider other options first:

- The database itself might provide simpler alternatives to running multiple proxies. For example, if the issue is caused by certain users monopolizing the pool, you could use the database's permission system to limit the number of concurrent connections those users are allowed to open.
- Similarly, database-level query timeouts and idle timeouts can address issues with orphaned connections or runaway queries.
- If the issue is caused by query or transaction duration or per-query resource consumption rather than the number of concurrent connections, using additional proxies won't help because the proxy doesn't impose limits on query or transaction weight. If the issue can't be addressed at the source, you can use the database's event scheduler to run code that detects and terminates client activity based on arbitrary conditions instead of moving those problematic clients to a separate proxy.

If you decide to use multiple proxies in front of the same target, ensure that the total size of all connection pools doesn't exceed the capabilities of the target database. For example, the sum of

`MaxConnectionsPercent` across all proxies must be less than 100, otherwise the proxies may try to open more connections than the database is configured to handle.

Each proxy is billed separately, and the billing rate depends on the size of underlying database resources and not the workload activity. Consider the cost of running multiple proxies versus the cost of implementing alternative solutions, if any exist.

Controlling read and write pools independently

Each proxy provides one read/write endpoint and (optionally) additional read/write or read-only endpoints, but the limits and timeouts are configured for the entire proxy target and not individually for each proxy endpoint.

For example, you might have an Aurora cluster handling a large volume of read-only queries using multiple read replicas and the proxy's reader endpoint, but you want to limit the number of read/write connections to reduce resource pressure on the single writer. Since the `MaxConnectionsPercent` setting is defined for the entire proxy target (cluster), you can't limit the number of connections against the read/write endpoint without also affecting the limits of the read-only endpoint.

There are multiple ways to approach this challenge:

You can launch additional read replicas in the cluster and proportionally reduce the proxy's `MaxConnectionsPercent` setting. This preserves the total size of the read-only connection pool while reducing the maximum number of connections allowed on the writer. However, it also increases the cluster cost and it's progressively less effective the more replicas you have.

You could use instance-level parameter groups to configure database connection limits (such as `max_connections` in Aurora MySQL or PostgreSQL) for the read replicas separately from the writer. However, you must avoid using asymmetric parameter configuration because replicas can be promoted to a writer role during a failover, so the initial parameter differentiation won't be permanent. You might think of changing instance-level failover priority settings to influence which replicas are selected for promotion during failovers, and use that as a soft failover exclusion mechanism making the asymmetric configuration more predictable. However, failover priorities only serve as hints and are not a firm guarantee of failover behavior. Multi-instance configurations with asymmetric settings are therefore discouraged since they require continuous monitoring and can produce unexpected behavior if a failover lands on an instance that you didn't prefer.

In this scenario, using multiple proxies could be the cleanest way of managing read and write pools separately. You can create two proxies for the single database target, then configure applications

to use the writer endpoint from the first proxy and the read-only endpoint from the second proxy. One proxy handles write workloads only, the other proxy handles read workloads only, and the `MaxConnectionsPercent` (as well as other settings) can be configured independently for each proxy. This solution involves an additional cost for running the second proxy, but it's simpler and more predictable than the preceding alternatives.

Application and workload considerations

Topics

- Multi-tenant and multi-user environments
- Databases serving multiple applications or software stacks
- Using application-level pooling and advanced drivers with RDS Proxy

Multi-tenant and multi-user environments

When it comes to scalability and improving connection management, the benefits of using RDS Proxy depend on its ability to perform connection pooling and, to a much greater extent, connection multiplexing. Connection pooling reduces the overhead associated with opening and closing connections. Connection multiplexing allows the proxy to reuse a back-end database connection after a transaction. For more information, see RDS Proxy concepts and terminology.

When a connection can't be multiplexed, the proxy falls back to a behavior called *connection pinning*. Pinning is a situation where a client is forced to use the same underlying proxy connection for its entire session. The proxy connection is reserved for that one client, so it's not available for reuse by other clients. In other words, pinning creates an exclusive 1:1 association between a client-proxy connection and a proxy-database connection. Avoiding pinning is important in all scenarios where RDS Proxy is used mainly for scalability and efficiency reasons. For the most current pinning behavior, see Avoiding pinning an RDS Proxy.

As a general rule, connections can be multiplexed when they have identical state. Connections can't be multiplexed when they contain custom session-specific state information. One of the aspects defining session state is the database user name associated with a connection. When you connect to the proxy as "user_A", the proxy needs to open a back-end database connection as "user_A" as well. The proxy can potentially pool and reuse this back-end connection for other clients that log in as "user_A", but not for clients using a different user name.

This behavior can significantly reduce pooling and multiplexing efficiency in multi-user environments with a large number of unique database accounts. This is particularly true in

architectures using database-level or schema-level multi-tenancy. If the database contains a thousand schemas (one per tenant) and each tenant connects to the database with a different user name, the connection pool becomes fragmented into user-specific micro-pools, reducing overall efficiency.

Additionally, aspects specific to the database engine might further affect pooling efficiency and the proxy's ability to multiplex connections:

1. In Amazon RDS and Aurora PostgreSQL, multi-tenancy is often implemented by using one database per tenant. However, in PostgreSQL, connections are database-specific: a connection opened against one database can't access data from other databases. Therefore, database-level multi-tenancy reduces the efficiency of pooling and multiplexing at the proxy level. This consideration also applies if the workload uses schema-level multi-tenancy and client sessions use a custom `search_path`. However, if all sessions use the default search path and refer to tables using fully qualified names (`schema_name.table_name`), those sessions can be multiplexed.
2. In Amazon RDS and Aurora MySQL, the terms "database" and "schema" are synonyms. Multi-tenancy is often implemented by using one schema per tenant, which in MySQL is the same as one database per tenant. Connections are opened against a MySQL server as a whole and are not tied to a schema. If the application uses schema-level multi-tenancy, connection multiplexing is still possible for clients using the same database user name, even if those connections need to access data in different schemas. Multiplexing will be most effective if tenant separation is done at the application level instead of using different database accounts for each tenant.

In multi-schema environments, multiplexing efficiency depends on how you refer to table names:

- For clients that choose the current schema using session variables (`SET search_path ...` in PostgreSQL and `USE schema;` in MySQL) and then use unqualified table names in queries (such as `SELECT ... FROM table_name`), connection multiplexing only works between clients using the same schema or the same search path.
- For clients that don't modify session state to define the current schema, but instead use fully qualified table names in the SQL statements (such as `SELECT ... FROM schema_name.table_name`), multiplexing is not similarly constrained.

Databases serving multiple applications or software stacks

As discussed in the preceding section, certain connection state characteristics don't cause pinning, but still reduce the proxy's ability to reuse connections between different clients. When used with MySQL targets, RDS Proxy tracks a number of statements and session variables that configure session state, such as the character set, time zone, and collation settings. When a client uses tracked statements or variables to configure session settings, the proxy connection can only be reused for other clients that have the same values for those settings.

As a result, certain application and driver behaviors might reduce your ability to reuse connections inside of the proxy. For example, you might allow different applications to connect to the database using the same user name, assuming that the proxy can reuse and multiplex connections between those applications. However, if one application bootstraps connections with time zone A (`SET time_zone = ?`) and another application uses time zone B, connections are reusable within an application but not between applications. This leads to fragmentation of the connection pool, negatively affecting the effectiveness of pooling and multiplexing.

For more information, see What RDS Proxy tracks for Aurora MySQL databases. Session state tracking is not currently supported for database targets other than MySQL.

See Configuration guidelines for configuration guidelines and best practices for managing session state to avoid connection pinning.

Using application-level pooling and advanced drivers with RDS Proxy

RDS Proxy helps improve scalability and connection efficiency in situations where the application itself is not using connection pooling. At the same time, many drivers and frameworks do include pooling features. You might also be using advanced wrappers or drivers that implement some of the proxy's features at the driver level.

Using application-level pooling and other connection handling improvements does not inherently conflict with using RDS Proxy, and doesn't negate its benefits. For example, you might be using connection pooling in your application containers, but the number of containers is large enough that you'd still run out of database connection limits without using a proxy. When using RDS Proxy with application-level pools and other connection-related features, review and understand the reasons for advanced connection-handling features to exist at the application level. Decide which of those features are worth keeping (or are harmless), and which can overlap or interfere with the proxy behavior. For example:

1. Pooling features built into drivers and frameworks can be useful even if they appear to overlap with the RDS Proxy functionality. If an application-level pool improves local connection efficiency on top of the benefits provided by the proxy, you can keep it.
2. Features related to failover handling might interfere with RDS Proxy logic or increase the overall stack complexity without providing benefits. For example, if your application is actively tracking the topology of your Aurora clusters to avoid DNS-related failover delays, it no longer needs to do so with RDS Proxy. Keeping this topology tracking logic might lead to undesirable behavior, such as the application threads bypassing the proxy and connecting directly to individual database instances. In this scenario, you can disable the application-level tracking logic and let RDS Proxy abstract the cluster topology for you.
3. Connection pooling libraries might use state management features that seem beneficial in theory, but interfere with proxy behavior. One such example is PostgreSQL libraries calling the `DISCARD ALL` query to reset connection state between borrows. It might seem that resetting connections should help with pooling and multiplexing, but it interferes with Amazon RDS Proxy's internal session state management. When using `DISCARD`, the proxy pins your client connection on release, reducing the multiplexing efficiency.

For any application-level connection handling components you do keep, ensure their configuration doesn't interfere with the connection handling logic used by Amazon RDS Proxy. For example:

- Align pool sizing across all layers of the stack. If the application-level pools are over-sized (or your proxy pool is under-sized), the application may try to open connections that the proxy isn't configured to handle. Those connections can experience delays at best and rejection errors at worst.
- Align timeout settings to reduce churn and avoid confusion around connection behavior. If the application pool keeps connections alive for 300 seconds, but the proxy is configured to close connections after 60 seconds, the application will see premature connection closures instead of the expected behavior.

Some of these architectural decisions and configuration choices might require testing and experimentation. It's not always possible to exactly predict application behavior in an environment with multiple layers of pooling and connection management.

Refer to Configuration guidelines for common configuration guidelines.

Configuration guidelines

This section describes the settings available in RDS Proxy and provides best practices for aligning configuration across the application stack. These are combined guidelines for using RDS Proxy with Amazon RDS and Amazon Aurora. RDS-specific and Aurora-specific notes are called out where applicable.

Unless noted otherwise, the terms "database" or "target" refer to an Aurora cluster, an Amazon RDS Multi-AZ DB cluster, or an Amazon RDS instance.

Topics

- Settings for RDS Proxy
- Aligning application, proxy, and database configuration
- Database configuration
- Application configuration

Settings for RDS Proxy

MaxConnectionsPercent

Minimum value	Maximum value	Default value
lesser of (1, MaxIdleConnectionsPercent)	100	100

For more information, see MaxConnectionsPercent.

This setting limits the number of connections that RDS Proxy can establish with the target database, as a percentage of the maximum number of connections allowed by the database. The proxy opens back-end connections as needed, so the actual number of connections at any given time might be lower than the configured maximum.

Given that the `MaxConnectionsPercent` setting is a percentage of the database connection limit, the proxy's connection pool size automatically follows database configuration. This means you don't need to reconfigure your proxies whenever you resize your database instances or make configuration changes. It also means you need to be aware of the scenarios when the database settings might change, whether implicitly or explicitly:

- If you did not explicitly set the connection limit (such as the `max_connections` parameter) in your database's parameter group, Amazon RDS and Aurora calculate it automatically based on the database instance class. As a result, the implicit connection limit can change when you scale your database instances, thus influencing the maximum pool size in the proxy. For more information, see Maximum number of database connections in the *Amazon RDS User Guide*, Maximum connections to an Aurora MySQL DB instance, and Maximum connections to an Aurora PostgreSQL DB instance in the *Amazon Aurora User Guide*.
- Aurora Serverless v2 database instances determine their connection limit based on the database's maximum ACU configuration. For details, see Maximum connections for Aurora Serverless v2 in the *Amazon Aurora User Guide*.

Best practices:

- The default setting of 100 percent is suitable for databases that receive all of their traffic through the proxy and don't need any headroom for administrative access or other clients.
- Reduce this setting when the database also receives traffic directly from applications (bypassing the proxy) and you don't want the proxy to consume all the connections, or when you want to set a certain number of connections aside for other purposes such as direct access by database administrators.
- When using RDS Proxy with Aurora Global Database clusters and Write Forwarding is enabled, reduce your proxy's `MaxConnectionsPercent` value by the quota that's allotted for write forwarding. For details, see configuration parameters for write forwarding in Aurora MySQL and Aurora PostgreSQL in the *Amazon Aurora User Guide*. This recommendation applies whether the proxy is serving a cluster in the primary or a secondary Region of the global database. Secondary clusters can be promoted to the primary role, so it's a good practice to keep proxy settings consistent across the entire global topology. You *can* use asymmetric settings for proxies serving primary versus secondary regions, but you'll need to adjust those settings after each global failover or switchover.
- If the target serves multiple proxies, the combined value of `MaxConnectionsPercent` across all those proxies must not exceed 100 so that the database doesn't become oversubscribed. We recommend using a single proxy per target to simplify configuration and management. In particular, you don't need to use multiple proxies per database for redundancy. For more information, see Using multiple proxies with one target.

Whether you're using the default `MaxConnectionsPercent` setting or a custom value, keep at least a 30% headroom between the number of connections allowed and the maximum number of client connections expected during peak periods. For example:

- If you believe the proxy will need up to 50% of the connection limit configured for the database, use a `MaxConnectionsPercent` setting of at least `1.3 * 50% = 65%`.
- When using the default `MaxConnectionsPercent` setting of 100, make sure the database limit itself provides enough headroom.

This additional headroom improves client experience during unexpected workload spikes and helps RDS Proxy redistribute connections across its internal infrastructure for heat management and other purposes.

Although you can set `MaxConnectionsPercent` to a value as low as 1, we recommend the following minimums based on instance type:

- db.t3.small: 100
- db.t3.medium: 55
- db.t3.large: 35
- db.r3.large or above: 20

MaxIdleConnectionsPercent

Minimum value	Maximum value	Default value (SQL Server)	Default value (other engines)
(zero)	MaxConnectionsPercent	5% of MaxConnectionsPercent	50% of MaxConnectionsPercent

For more information, see MaxIdleConnectionsPercent.

This setting limits the number of idle database connections that RDS Proxy keeps in the connection pool, as a percentage of the maximum number of connections allowed by the database. A database (back-end) connection is considered to be idle when there's been no activity on the connection for five minutes. This setting applies to connections between the proxy and the back-end database.

Note the following:

- This setting limits the number of idle connections in the pool, but doesn't force the proxy to retain a given number of idle connections. If the client activity is very low, the actual number of back-end database connections can be lower than `MaxIdleConnectionsPercent`.
- Connections count as idle when they are available for reuse in the proxy's connection pool. Pinned connections are not available for reuse by other clients, and therefore don't count as idle for the purposes of enforcing `MaxIdleConnectionsPercent`. For more information about pinning, see Avoiding pinning an RDS Proxy.
- The number of idle connections reported by database metadata is typically higher than the number of idle connections recorded by RDS Proxy metrics. This can be due to direct client connections bypassing the proxy as well as internal connections used by Amazon RDS and Aurora automation.

> **Note**
>
> The connection idle time observed and enforced at the proxy layer might be different than the idle time reported by database tools such as the MySQL process list or the activity statistics tables in PostgreSQL. RDS Proxy pings back-end connections occasionally, which resets the database idle timers even though the connection remains idle in terms of client activity.

Best practices:

The default setting of 50 is suitable and recommended for most workloads. Changing the setting has the following effect:

- When you raise `MaxIdleConnectionsPercent`, the database observes a larger number of idle connections which can increase database resource consumption outside of peak hours. On the other hand, connection spikes handled through the proxy experience lower borrow latency because there are more connections readily available in the pool.
- When you lower `MaxIdleConnectionsPercent`, the proxy closes idle connections more aggressively, potentially reducing the contention and resource consumption caused by those connections. However, connection spikes passing through the proxy might experience longer borrow times. As there are fewer connections available in the pool, the proxy needs to spend additional time opening new back-end connections during a spike.

Resource consumption by idle connections might not be a material concern in databases using provisioned instance types, but Aurora databases using the Serverless v2 instance type might prefer to optimize idle resource consumption to reduce cost.

IdleClientTimeout

Minimum value	Maximum value	Default value
1 minute	8 hours	30 minutes

For more information, see IdleClientTimeout.

This setting determines how long a client connection can remain idle before the proxy closes it. Note that RDS Proxy enforces a maximum connection lifetime of 24 hours, regardless of whether the connection is idle. For example, if you configure `IdleClientTimeout` to 30 minutes (default) and ping the database every minute, the connection never exceeds the idle timeout, but it doesn't remain open indefinitely. RDS Proxy closes the connection after 24 hours even if it doesn't qualify as idle.

The `IdleClientTimeout` setting applies to the connection between a client (applications or interactive users) and RDS Proxy. To understand idle behavior of back-end connections between RDS Proxy and the database, see MaxIdleConnectionsPercent.

Best practices:

- The idle timeout must be long enough to accommodate normal pauses in SQL activity inside of a client connection or transaction. It must not be so long as to allow a client to hold on to resources that it reasonably no longer needs, but that might be needed by other clients. This is particularly important if you observe connection pinning because a connection pinned by one client can't be reused by other clients.
- For RDS Proxy to correctly enforce the timeout, the client connection must be truly idle without sending any queries (even simple health checks such as `SELECT 1;`) or protocol pings (such as `COM_PING` in MySQL). If you observe connections not being closed despite exceeding the timeout, check the connection logic of your application drivers. Application-level connection pools are particularly likely to perform their own liveness checks interfering with `IdleClientTimeout`.

ConnectionBorrowTimeout

Minimum value	Maximum value	Default value
(zero)	5 minutes	2 minutes

For more information, see ConnectionBorrowTimeout.

When a client connects to RDS Proxy, the proxy must either borrow an existing available connection from the pool or open a new database connection. This setting defines how long RDS Proxy waits for a connection to be borrowed or opened before returning an error.

Note the following:

- A `ConnectionBorrowTimeout` of zero results in timeout errors when the connection pool doesn't already contain an available connection. This is true even if the pool is below maximum capacity and could open a new back-end connection.
- Even with `MaxIdleConnectionsPercent` equal to `MaxConnectionsPercent`, the actual number of connections in the pool can be lower than the configured maximum. In other words, `MaxIdleConnectionsPercent` limits the amount of idle connections but doesn't force connections to remain open.

It is normal for a connection pool to run below maximum capacity. In this situation, using a `ConnectionBorrowTimeout` setting of zero can prevent the pool from growing because the pool isn't allowed to wait for a new connection to be opened. As a result, you should use non-zero `ConnectionBorrowTimeout` values for all workloads unless the previously described behavior is preferred.

> **Note**
>
> This setting also applies when the database is not ready to accept connections, such as during offline maintenance operations and failovers. The logic for enforcing the `ConnectionBorrowTimeout` is the same whether the database is up or down.

Initialization queries and pinning filters

RDS Proxy supports additional features that can reduce connection pinning and improve multiplexing efficiency as a result.

An **initialization query** is one or more statements run each time the proxy sets up a new back-end database connection. If your clients use identical statements to set up session parameters, you can move those statements to the proxy's initialization query. This helps reduce the probability of pinning and it also improves efficiency: a particular back-end database connection runs its initialization query once during setup but it might be reused later by many clients. Keep in mind that putting SQL statements in the initialization query does not filter them out from client traffic. You still need to remove those statements from the application code so that they don't interfere with multiplexing.

Session pinning filters are a configuration property that prevents the proxy from pinning certain session states. The only filter option currently available, `EXCLUDE_VARIABLE_SETS`, instructs the proxy to ignore all `SET` statements when determining whether a session should be pinned. The `SET` statements are still passed on to the database and can affect session state, which means this option is only safe in the following situations:

1. The `SET` statements are no-ops, such as setting a system variable to a value identical with the server default.
2. The `SET` statements and subsequent queries are part of the same transaction, and every transaction sets up its own state fully independently so that it's not affected by variables set by other transactions.

> **Note**
>
> The `EXCLUDE_VARIABLE_SETS` pinning filter is an all-or-nothing setting and you cannot selectively choose which `SET` statements to ignore. Do not use this filter as a blanket solution for pinning unless your use case falls under one of the categories discussed in the preceding list.

For best results, remove unnecessary statements from application code where possible, and only using filters if application modifications are not possible. This promotes a less noisy and more predictable client-server environment as opposed to applying special treatment to statements that aren't needed in the first place.

> **Important**
>
> Neither initialization queries nor pinning filters cause RDS Proxy to alter the client-server query traffic. Statements arriving from the clients are still passed on to the database regardless of the init query or pinning filter configuration.

For more information, see:

- Creating a proxy and Modifying a proxy for Amazon RDS.
- Creating a proxy and Modifying a proxy for Amazon Aurora.

For PostgreSQL connections, you can also put supported connection parameters in the startup message exchanged between the client driver and the proxy. This avoids sending separate SET commands, both reducing round-trips and avoiding connection pinning caused by explicit SET statements. For more information, see Considerations for connecting to PostgreSQL.

Aligning application, proxy, and database configuration

As discussed in the preceding section, RDS Proxy supports a range of parameters to help you align the proxy behavior with your application needs. However, choosing the right configuration values is a task that cuts across all layers of the stack: the application, the proxy, and the database itself. The settings of all those components must be aligned with the following goals in mind:

1. Provide the expected level of performance and scalability during normal operations.
2. Promote clarity and ease of troubleshooting during workload issues.
3. Help the stack deal with unexpected events (such as workload surges) with minimal impact to the application.

When choosing and tuning settings in a multi-layered environment, try to align configuration values such that the limits and timeouts at a lower layer are equal to or higher than the corresponding limits and timeouts at a higher layer. In other words, treat settings from one layer as an envelope that fits into the next configuration envelope further down the stack.

For example, assume that your application is the top layer, the proxy is a middle layer, and the database is the lower layer. If the timeouts and limits at the proxy level are lower than the limits at

the application level, proxy limits preempt application limits. The application is unable to exercise its settings and it experiences behaviors that can't be explained by its own configuration.

Consider the `IdleClientTimeout` proxy setting as an example. If your application drivers or client pools enforce their own idle timeouts, the proxy's idle timeout is a safety net on top of the application settings. This means the `IdleClientTimeout` must be at least equal to any application-level idle timeouts to prevent confusion:

- When the application idle timeout is lower than the proxy timeout, you expect the application to close its connections as configured. If the application fails to close idle connections in a timely manner, the proxy acts as a backstop.
- When the application idle timeout is longer than the proxy timeout, the application might experience connection closures that are considered premature. This can lead to confusion on the application side.

The same logic applies to other settings such as connection limits: each layer's settings should fit inside of the envelope defined by the next layer's configuration.

For best results, configuration settings should include some padding between one layer and the next. For example, you can make the proxy timeout a few seconds longer than the application timeout to avoid sporadic errors due to client/server clock drift, or in case the client needs additional time to gracefully close the connection.

In other words, align your settings like this:

```
client timeout < proxy timeout < database timeout
```

Instead of doing this:

```
client timeout = proxy timeout = database timeout
```

And avoid this:

```
client timeout > proxy timeout > database timeout
```

Database configuration

Connection limits

RDS Proxy uses the `MaxConnectionsPercent` setting to determine the maximum size of its connection pool, which means the proxy's connection pool size is relative to the database's

connection limit. When you change the database's connection limit, the proxy's pool size follows automatically. If you want the database to reserve a portion of connection limit for non-proxy users, you should do that by lowering the `MaxConnectionsPercent` setting in the proxy rather than by increasing the database limit.

RDS Proxy doesn't eliminate the need for proper configuration of database connection limits. A single proxy connection isn't inherently lighter than a single direct client connection, so don't increase database limits solely because you're using a proxy. A proxy doesn't reduce the amount of work the database must perform to handle queries, but it helps the database handle the same workload using fewer connections.

Idle timeouts

Databases can enforce their own idle timeouts, for example, using the `wait_timeout` and `interactive_timeout` settings in MySQL or the `transaction_timeout` and `idle_in_transaction_session_timeout` settings in PostgreSQL. Default values for those settings are unlikely to interfere with proxy configuration, but if you use custom database-level timeouts, make sure they're at least as long as the corresponding proxy timeouts or otherwise the proxy experiences connection errors due to premature timeouts.

The same logic applies to database environments using connection killers, which are scripts or processes that monitor session state and actively terminate connections based on certain criteria. If your environment uses such techniques, ensure that the connection termination logic aligns with proxy settings.

Databases that handle all their workload through the proxy can typically depend on the proxy configuration for idle timeouts, and leave the database-level settings at their default values.

Application configuration

Managing session state

Many database drivers, application frameworks, and object-relational mapping (ORM) tools use session variables or SET statements to set up connections before sending query traffic. The use of connection and transaction initialization statements might not be obvious when looking at the application code alone, and there can be several layers of abstraction between the database itself and the SQL statements and application logic. You can use the RDS Proxy enhanced logging feature to record reasons for connection pinning, and database query logs can provide further information about all statements sent over your database connections.

Consider the following best practices:

1. Set connection parameters only when they're different from database defaults and the client session must deviate from those defaults. Removing unnecessary initialization statements not only helps with multiplexing, but it also reduces the number of client-server round trips for each new database connection.
2. Set variables and configuration settings consistently across all connections.
3. Avoid session configuration that can also be applied at query runtime. For example, if different clients need to see data in different time zones, consider using time zone conversion functions at the query level instead of setting the time zone at the session level.
4. If possible, move session configuration statements to the proxy layer using the initialization query feature. For more details, see Initialization queries and pinning filters.

Liveness checks

If your application uses connection pooling or advanced drivers, look for configuration related to liveness checks such as protocol pings, health check statements, or keep-alive queries. RDS Proxy treats all client requests equally, so even though a `SELECT 1;` query or a `COM_PING` request is a no-op from the application perspective, it prevents the proxy from enforcing idle client timeouts and managing the connection pool size according to `MaxIdleConnectionsPercent`.

> **Note**
>
> RDS Proxy enforces a maximum connection lifetime of 24 hours regardless of the activity on the connection.

In most cases, it might be appropriate to disable client-side liveness checks to reduce protocol noise and help RDS Proxy manage idle connections. There are edge cases when you might want to run those health checks regardless:

- You deliberately want to prevent certain connections from timing out in the proxy layer.
- You want to allow the application driver or pool to proactively detect when a connection is dropped by the proxy. For example, pinned back-end connections might be closed due to a database restart and client connections might exceed the 24 hour maximum lifetime.

Consider disabling liveness checks on the application side, or only perform them for the specific connections that you want to keep from timing out.

Session state tracking

Some MySQL database drivers, such as the MariaDB driver, use `session_track_*` variables to enable tracking of session state. With this feature enabled, whenever the client makes a session state change that the server can track, the server includes the state change information in its response packets. This allows the driver to be advised about session state by the server.

This manner of session state tracking can be meaningful when the client interacts with the server directly and implements its own session management features, such as session migration in multi-server environments. RDS Proxy implements its own state tracking mechanisms and doesn't use the information enabled by `session_track_*` variables, however setting those variables causes session pinning.

If your database driver sets those variables, you can look for ways to disable the tracking functionality in the driver, switch to a different driver, or use session pinning filters to ignore the statements if it's safe to do so. For more details, see Initialization queries and pinning filters.

Amazon Aurora On-Demand Capacity Reservations

On-Demand Capacity Reservations for Amazon Aurora let you reserve compute capacity for your Aurora DB instances in one or more Availability Zones in an Amazon Region. By creating a Capacity Reservation, you help make sure that you have access to Aurora compute capacity when you need it, for as long as you need it. Then DB instance create and compute scaling operations don't fail because of insufficient capacity.

You can reserve capacity for immediate use, or schedule a reservation to begin on a future date so that capacity is reserved ahead of a planned event such as a migration, a product launch, or a seasonal peak.

Immediately active reservations require no commitment, and you can cancel them at any time. Future-dated reservations require a minimum commitment duration.

A Capacity Reservation applies to individual DB instances, not to a DB cluster. You specify the reservation for each DB instance that you want to place in reserved capacity.

Topics

- Getting started with On-Demand Capacity Reservations
- Capacity Reservation pricing and billing
- Creating a Capacity Reservation
- Viewing and modifying your Capacity Reservations
- Canceling a Capacity Reservation
- Using a Capacity Reservation with an Aurora DB instance
- Stopping and starting a DB cluster in a reservation

Getting started with On-Demand Capacity Reservations

An Aurora Capacity Reservation holds compute capacity for a specific combination of DB instance class, database engine, and Availability Zones, and reports a state that reflects where it is in its lifecycle. Before you create a reservation, review what it holds, how it's identified, when to use one, and the states it can report.

A reservation holds compute capacity for a specific combination of:

- **DB instance class** (for example, db.r7g.large)
- **Database engine** (for example, Aurora PostgreSQL or Aurora MySQL)
- **One or more Availability Zones** in a single Amazon Region
- **Reserved capacity per Availability Zone** – the number of DB instances to reserve in each zone

A reservation holds the same capacity in every Availability Zone you specify. Because each DB instance references its own reservation, the DB instances of one DB cluster don't have to share a reservation. For example, the writer can use a reservation in one Availability Zone, and an Aurora Replica can use a different reservation in another Availability Zone.

To use reserved capacity, you explicitly reference the reservation by either the name you gave it or the ID that Amazon RDS assigns to it when you create or modify an Aurora DB instance (see Using a Capacity Reservation with an Aurora DB instance). Amazon RDS Capacity Reservations are targeted – a DB instance draws from a reservation only when you specify that reservation's identifier or name. Creating a reservation on its own does not change how other DB instances in your account are placed.

A Capacity Reservation is identified by an ID with the prefix `dbcr-` (for example, `dbcr-abc123example`) and by a name that you assign when you create it.

Use a Capacity Reservation in the following cases:

- Reserving capacity for a planned migration into Amazon Aurora.
- Reserving capacity ahead of a launch or a seasonal peak (for example, a fourth-quarter sales event).
- Reserving capacity for a specific future date so it's in place before you need it.

Topics

- Differences between Capacity Reservations, reserved DB instances, and Savings Plans
- Quotas for Capacity Reservations
- Considerations and limitations
- Capacity Reservation states

Differences between Capacity Reservations, reserved DB instances, and Savings Plans

The following table shows the key differences between Capacity Reservations, reserved DB instances, and Database Savings Plans.

Feature	Capacity Reservations	Reserved DB instances	Database Savings Plans
Term	No commitment required for immediate-use Capacity Reservations. You can create, modify, and cancel them as needed. With future-dated Capacity Reservati ons, you specify a commitment duration for which you commit to keeping the capacity in your account.	Requires a fixed one-year or three-year commitment.	Requires a fixed one-year commitment.
Capacity benefit	Capacity reserved in a specific Availability Zone.	No capacity reserved.	No capacity reserved.
Billing discount	No billing discount. You can combine Capacity Reservations with Database Savings Plans or Reserved DB instances to receive a discount.	Provides a billing discount.	Provides a billing discount.
Instance limits	Your On-Demand DB instance quota for each Region applies.	Asia Pacific (Mumbai) (ap-south-1): 20. Each of the other supported Regions: 40.	No limit.

For more information, see Reserved DB instances for Amazon Aurora and Database Savings Plans.

Quotas for Capacity Reservations

The number of DB instances that you can reserve capacity for is based on your account's On-Demand DB instance quota. The quota covers your existing DB instances plus any unused reserved capacity. The capacity you can newly reserve is your quota, minus the DB instances you already have, minus the unused capacity in your other reservations. Reserved capacity is counted as the capacity per Availability Zone multiplied by the number of Availability Zones, so reserving 3 DB instances across 3 Availability Zones uses 9 of your quota.

Considerations and limitations

Keep in mind the following limitations:

- Capacity Reservations aren't supported with Amazon RDS Blue/Green Deployments. You can't specify a Capacity Reservation when you create a blue/green deployment, and the DB instances in the green environment don't draw from a reservation.
- Capacity Reservations are scoped to a single Amazon Region, and within that Region to the specific Availability Zones you specify. Reserved capacity can be used only in those Availability Zones – a DB instance in any other zone can't draw on the reservation, even in the same Region. Create separate reservations in each Region and Availability Zone where you need reserved capacity.
- A reservation covers one DB instance class and one engine (`aurora-mysql` or `aurora-postgresql`), across one or more Availability Zones. To reserve different combinations, create multiple reservations.
- A reservation reserves the same capacity in each Availability Zone you specify, up to the number of Availability Zones in the Region. Each Aurora DB instance uses one unit of capacity in one Availability Zone. To place the writer and Aurora Replicas of a DB cluster in different Availability Zones, you can use one reservation that includes those Availability Zones, or a separate reservation for each DB instance or Availability Zone.
- You specify a Capacity Reservation for each DB instance, not for a DB cluster. DB instances in the same DB cluster can use different reservations, and some can use On-Demand capacity.
- Reserved capacity applies to matching DB instances in the same account.
- Capacity Reservations don't support Aurora Serverless v2 DB instances (the `db.serverless` DB instance class).
- Future-dated reservations:

- Can be scheduled between 5 and 120 days ahead of the current date.
- Require a minimum commitment duration of 14 days. For the X family, the minimum commitment duration is 12 weeks.
- Support only DB instance classes in the C, M, R, T, and X families.
- Require M and R DB instance classes of generation 7 or later. For example, you can use db.m7g and db.r7g, but not db.m6g or db.r6i.
- Require at least 32 vCPUs in each Availability Zone of the reservation. For example, a db.r7g.large reservation (2 vCPUs for each unit) must reserve at least 16 units of DB capacity in each Availability Zone.

- Capacity Reservations don't reserve storage, I/O, or any resource other than compute capacity for the specified DB instance class.

Capacity Reservation states

A Capacity Reservation reports a state that reflects where it is in its lifecycle.

State	Description
`pending`	Amazon RDS is provisioning the reserved capacity.
`active`	Capacity is reserved and available for your DB instances. Billing is in effect.
`expired`	The reservation reached its end date and capacity has been released.
`cancelled`	You canceled the reservation and capacity has been released.
`failed`	The reservation couldn't be provisioned.

For future-dated reservations, the following additional states apply while the reservation is scheduled ahead of its start date.

State	Description
`assessing`	Amazon RDS is evaluating whether the requested future capacity can be delivered.

State	Description
`scheduled`	The request was accepted. Amazon RDS delivers the capacity on the start date. No charges apply yet.
`delayed`	Amazon RDS couldn't deliver capacity on the requested start date and is still working to fulfill it. Amazon RDS doesn't provide a revised delivery date. The reservation reports `CommitmentEndDate` equal to `StartDate` . The commitment is partly waived. You can cancel the reservation immediately, while it is in the `delayed` state, and you can set an end date earlier than the original commitment end date. But until the original commitment end date, you can't reduce the capacity below the committed capacity.
`unsupported`	The requested configuration can't be scheduled for the future date.

A future-dated reservation moves from `assessing` to `scheduled`, and then to `active` on the start date.

Capacity Reservation pricing and billing

The following topics give an overview of pricing and billing for Capacity Reservations.

Topics

- Pricing
- Billing
- Billing discounts
- Viewing your bill

Pricing

Capacity Reservations are charged at the equivalent On-Demand rate whether you run instances in reserved capacity or not. When you run a matching DB instance that matches the attributes of a reservation, you just pay for the DB instance and the capacity that it uses has no separate charge. Reserved capacity that has no DB instance usage appears as unused reservation on your bill. There are no upfront charges.

For example, you create a Capacity Reservation for 20 db.r7g.large DB instances in one Availability Zone, and you run 15 matching DB instances in that Availability Zone. You will be charged for the 15 DB instances and for 5 units of unused reserved capacity.

A Capacity Reservation reserves only compute capacity. Storage, I/O, backup storage, and other resources of your DB instances are billed as usual.

For more information, see Aurora pricing.

Billing

Billing for a Capacity Reservation starts as soon as the Capacity Reservation is provisioned in your account, and it continues while the Capacity Reservation remains provisioned in your account. For future-dated Capacity Reservations, this means that billing starts only after the Capacity Reservation is provisioned in your account at the requested future date.

Capacity Reservations are billed at per-second granularity, with a minimum of 60 seconds. This means that you are charged for partial hours. For example, if a Capacity Reservation remains provisioned in your account for 24 hours and 15 minutes, you are billed for 24.25 reservation hours.

The following example shows how a Capacity Reservation is billed. The Capacity Reservation is created for one db.r7g.large Aurora PostgreSQL DB instance in the US East (Ohio) Region. For this example, assume that the On-Demand rate of the db.r7g.large DB instance class is USD $0.276 per usage hour. In this example, the Capacity Reservation is provisioned in the account for five hours. The Capacity Reservation is unused for the first hour, so it is billed for one unused hour at the standard On-Demand rate of the db.r7g.large DB instance class. In hours two through five, the Capacity Reservation is occupied by a db.r7g.large Aurora PostgreSQL DB instance. During this time, the Capacity Reservation accrues no charges, and the account is instead billed for the db.r7g.large DB instance that occupies it. In the sixth hour, the Capacity Reservation is canceled and the db.r7g.large DB instance runs normally outside of the reserved capacity. For that hour, it is charged at the On-Demand rate of the db.r7g.large DB instance class.

Hour	Capacity Reservation	DB instance	Charge in this example
1	Active, unused	None	USD $0.276 for one hour of unused reserved capacity

Hour	Capacity Reservation	DB instance	Charge in this example
2–5	Active, used by one db.r7g.large DB instance	Runs in the reserved capacity	USD $0.276 per hour for the DB instance. No charge for the Capacity Reservation.
6	Canceled	Runs outside the reserved capacity	USD $0.276 for the On-Demand DB instance

In this example, the total charge for the six hours would be 6 × USD $0.276 = USD $1.656. The Capacity Reservation adds no charge for the hours that a DB instance uses it.

The following also applies to billing:

- Billing stops when you cancel the Capacity Reservation, or when it reaches its end date.
- When you increase the reserved capacity or set a later end date, the additional charges apply immediately. When you decrease the reserved capacity or set an earlier end date, you don't get a refund for time that has already passed.
- Stopping a DB cluster doesn't change the cost of the reservations that its DB instances use. The capacity that the stopped DB instances used appears as unused reservation.

Billing discounts

A Capacity Reservation doesn't give a billing discount. To get a discount, use Capacity Reservations together with reserved DB instances or Database Savings Plans. Amazon applies these discounts automatically to matching usage. When a DB instance uses the reserved capacity, the discount applies to the DB instance.

For more information, see Reserved DB instances for Amazon Aurora and Database Savings Plans.

Viewing your bill

You can review the charges for your Capacity Reservations on the Amazon Billing and Cost Management console. On the **Bills** page, under **Details**, expand the **Relational Database Service** section and the Region.

Creating a Capacity Reservation


When you create a Capacity Reservation, you specify a DB instance class, database engine, and one or more Availability Zones in a single Amazon Region, along with the amount of capacity to reserve in each Availability Zone. You can create the reservation for immediate use, or schedule it to begin on a future date ahead of a planned event. After the reservation becomes active, you reference it by name or by identifier to place DB instances into the reserved capacity.

Creating a reservation without a start date makes it immediately active. Capacity is reserved and billing begins immediately.


Console

To create a Capacity Reservation

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Capacity reservations**.
3. Choose **Create capacity reservation**.
4. Under **Engine options**, choose **Aurora (MySQL Compatible)** or **Aurora (PostgreSQL Compatible)**.

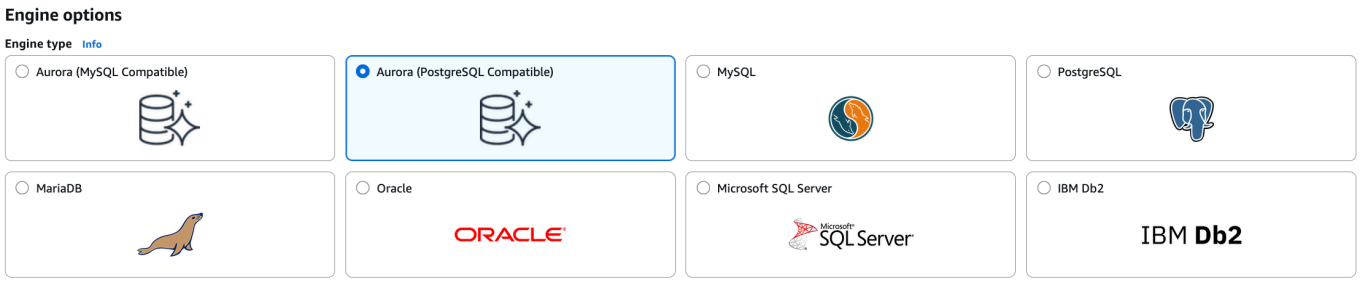


5. Under **Instance configuration**, choose the DB instance configuration.

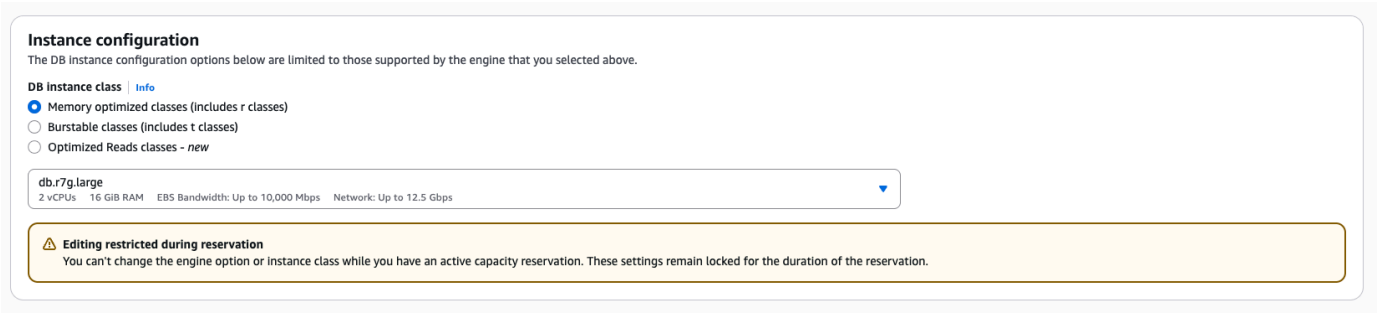

6. Under **Capacity reservation details**, do the following:

- For **DB capacity reservation name**, enter a name for the reservation. The name must start with a lowercase letter and can contain lowercase letters, digits, and hyphens, up to 63 characters. It can't end with a hyphen or contain two consecutive hyphens.
- Under **Availability Zones**, select one or more Availability Zones in the current Region. Select the Availability Zones where you plan to place the DB instances that use this reservation.
- For **Reserved capacity per AZ**, enter the number of DB instances to reserve in each Availability Zone.
- Under **Capacity reservation starts**, choose **Immediately**.
- (Optional) Under **Capacity reservation ends**, choose **No end time** to keep the reservation until you cancel it, or **At a specific time** to set an end date.

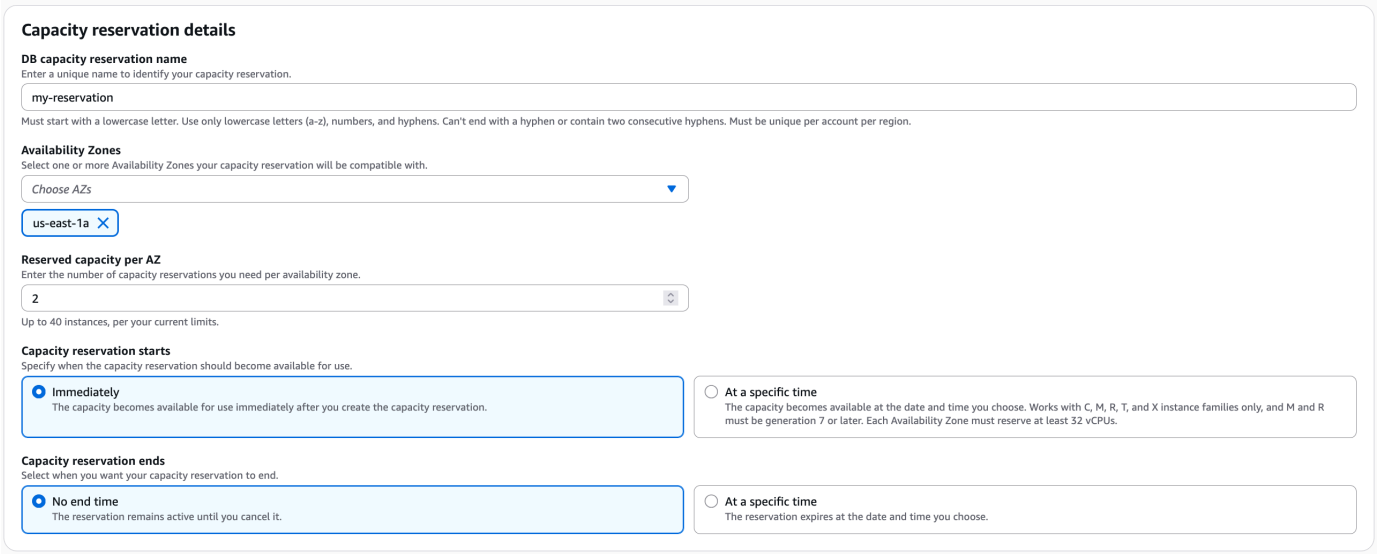

7. (Optional) Add tags.
8. Choose **Create capacity reservation**.

The reservation appears in the list. When its state becomes `active`, capacity is reserved and you can launch DB instances into it by referencing the reservation by name or by identifier. Creating a reservation does not change the placement of DB instances that don't target it.

Billing for an immediately active reservation starts when you create it. To stop the charges, cancel the reservation when you no longer need it. For more information, see Canceling a Capacity Reservation.

Amazon CLI

Create an immediately active reservation with the create-db-capacity-reservation command.

To reserve capacity in more than one Availability Zone with one reservation, list two or more Availability Zones. You can also create a separate reservation for each Availability Zone, and specify a different reservation for each DB instance in the DB cluster.

```
aws rds create-db-capacity-reservation \
    --db-capacity-reservation-name my-cluster-reservation \
    --engine aurora-postgresql \
    --db-instance-class db.r7g.large \
    --availability-zones us-east-1a us-east-1b \
    --capacity-per-availability-zone 2
```

Example response:

```
{
    "DBCapacityReservation": {
        "DBCapacityReservationName": "my-cluster-reservation",
        "DBInstanceClass": "db.r7g.large",
        "Engine": "aurora-postgresql",
        "ReservedCapacityPerAvailabilityZone": 2,
        "AvailableCapacityPerAvailabilityZoneList": [
            {
                "AvailabilityZone": "us-east-1a",
                "AvailableCapacity": 2
            },
            {
                "AvailabilityZone": "us-east-1b",
                "AvailableCapacity": 2
            }
        ],
        "CreateDate": "2026-09-21T21:44:50.147000+00:00",
        "State": "active",
        "DBCapacityReservationArn": "arn:aws:rds:us-east-1:123456789012:db-capacity-
reservation:dbcr-abc123example",
        "DBCapacityReservationIdentifier": "dbcr-abc123example",
        "TagList": []
    }
}
```

RDS API

To create a Capacity Reservation by using the Amazon RDS API, call the CreateDBCapacityReservation operation with the following parameters:

- `DBCapacityReservationName` – A name for the reservation. The name must start with a lowercase letter and can contain lowercase letters, digits, and hyphens, up to 63 characters. It can't end with a hyphen, contain two consecutive hyphens, or start with `dbcr-`.
- `Engine` – The database engine to reserve capacity for: `aurora-mysql` or `aurora-postgresql`.
- `DBInstanceClass` – The DB instance class to reserve capacity for, for example `db.r7g.large`.
- `AvailabilityZones` – One or more Availability Zones in the current Amazon Region.
- `CapacityPerAvailabilityZone` – The number of DB instances to reserve in each Availability Zone.

You can also specify the following optional parameters:

- `EndDate` – The date and time when the reservation expires, in UTC. If you don't specify it, the reservation doesn't expire.
- `Tags` – Tags to assign to the Capacity Reservation.

Creating a future-dated Capacity Reservation

To schedule a reservation to begin on a future date, provide a start date and a commitment duration. Amazon RDS assesses the request, and if it can deliver the capacity, moves the reservation to the `scheduled` state. No charges apply until the start date, when Amazon RDS activates the reservation.


While assessing a request, Amazon RDS might determine that it can support a shorter commitment duration. In that case, Amazon RDS schedules the reservation with the shorter commitment duration, and you are committed to keeping the reservation for a shorter period than you requested. To see the commitment that applies, check `CommitmentInfo.CommitmentEndDate` in the output of `describe-db-capacity-reservations`.

Console

Follow the steps in Creating a Capacity Reservation. Under **Capacity reservation starts**, do the following:

To create a future-dated Capacity Reservation

1. Choose **At a specific time**.
2. Set the **Start date** and **Start time** (must be at least 5 days in the future).
3. Set the **Commitment duration** (minimum 14 days). This is the period you commit to keep the reservation after it becomes active.

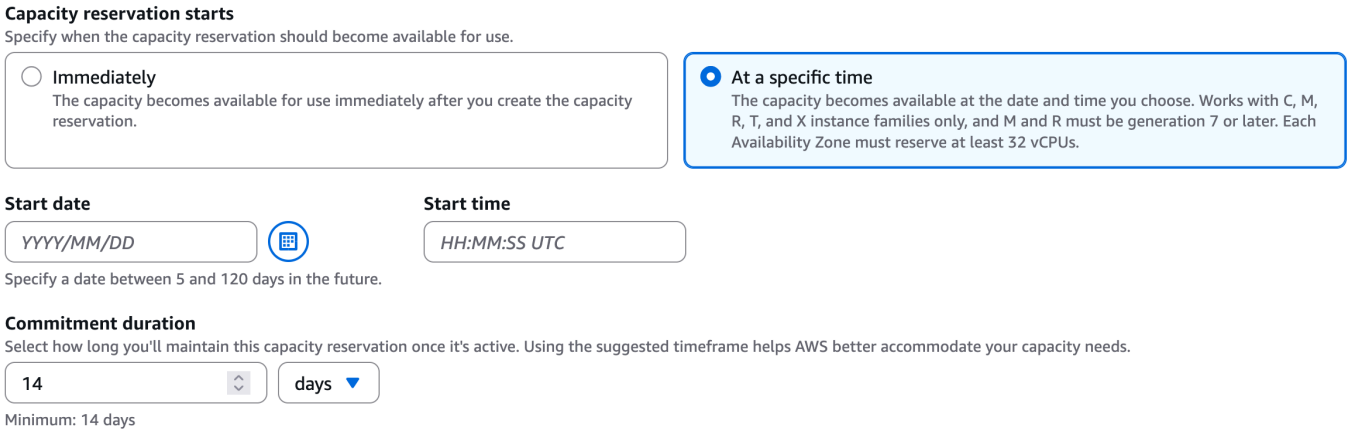

Complete the remaining steps and choose **Create capacity reservation**. The reservation is created in the `assessing` state and moves to `scheduled` after Amazon RDS accepts the request.

Amazon CLI

Add `--start-date` and `--commitment-duration` to the `create-db-capacity-reservation` command. `--commitment-duration` is specified in seconds (for example, `1209600` for 14 days).

```
aws rds create-db-capacity-reservation \
    --db-capacity-reservation-name peak-reservation \
    --engine aurora-postgresql \
    --db-instance-class db.r7g.large \
    --availability-zones us-east-1a \
    --capacity-per-availability-zone 16 \
    --start-date 2026-11-01T00:00:00Z \
    --commitment-duration 1209600
```

Example response:

```
{
    "DBCapacityReservation": {
        "DBCapacityReservationName": "peak-reservation",
        "DBInstanceClass": "db.r7g.large",
        "Engine": "aurora-postgresql",
        "ReservedCapacityPerAvailabilityZone": 16,
        "StartDate": "2026-11-01T00:00:00Z",
        "CommitmentInfo": {
            "CommittedCapacityPerAvailabilityZone": 16,
            "CommitmentEndDate": "2026-11-15T00:00:00Z"
        },
        "CreateDate": "2026-09-21T21:44:50.147000+00:00",
        "State": "assessing",
        "DBCapacityReservationArn": "arn:aws:rds:us-east-1:123456789012:db-capacity-
reservation:dbcr-def456example",
        "DBCapacityReservationIdentifier": "dbcr-def456example",
        "TagList": []
    }
}
```

Note

Omitting `--start-date` and `--commitment-duration` creates an immediately active reservation. The two future-dated parameters are used together.

RDS API

To create a future-dated Capacity Reservation by using the Amazon RDS API, call the CreateDBCapacityReservation operation with the parameters for an immediately active reservation, and with the following parameters:

- `StartDate` – The date and time when the reservation starts, in UTC. It must be 5–120 days in the future.
- `CommitmentDuration` – The length of the commitment, in seconds. The minimum is `1209600` (14 days). For the X family, the minimum is `7257600` (12 weeks).

Viewing and modifying your Capacity Reservations

After you create a Capacity Reservation, you can view its state and capacity usage at any time, and change the amount of capacity it reserves as your needs change. Viewing a reservation shows the capacity reserved and still available in each Availability Zone, along with its start and end dates, commitment information, and lifecycle state. Modifying a reservation changes the number of DB instances reserved in each Availability Zone while the reservation is active.

Topics

- Viewing Capacity Reservations
- Modifying a Capacity Reservation


Viewing Capacity Reservations

You can view Amazon Aurora Capacity Reservations using the Amazon Web Services Management Console, the Amazon CLI, or the Amazon RDS API.

Console

To view Capacity Reservations

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Capacity reservations**.
3. Select a reservation to see its state, reserved capacity, available capacity in each Availability Zone, start and end dates, and commitment information.

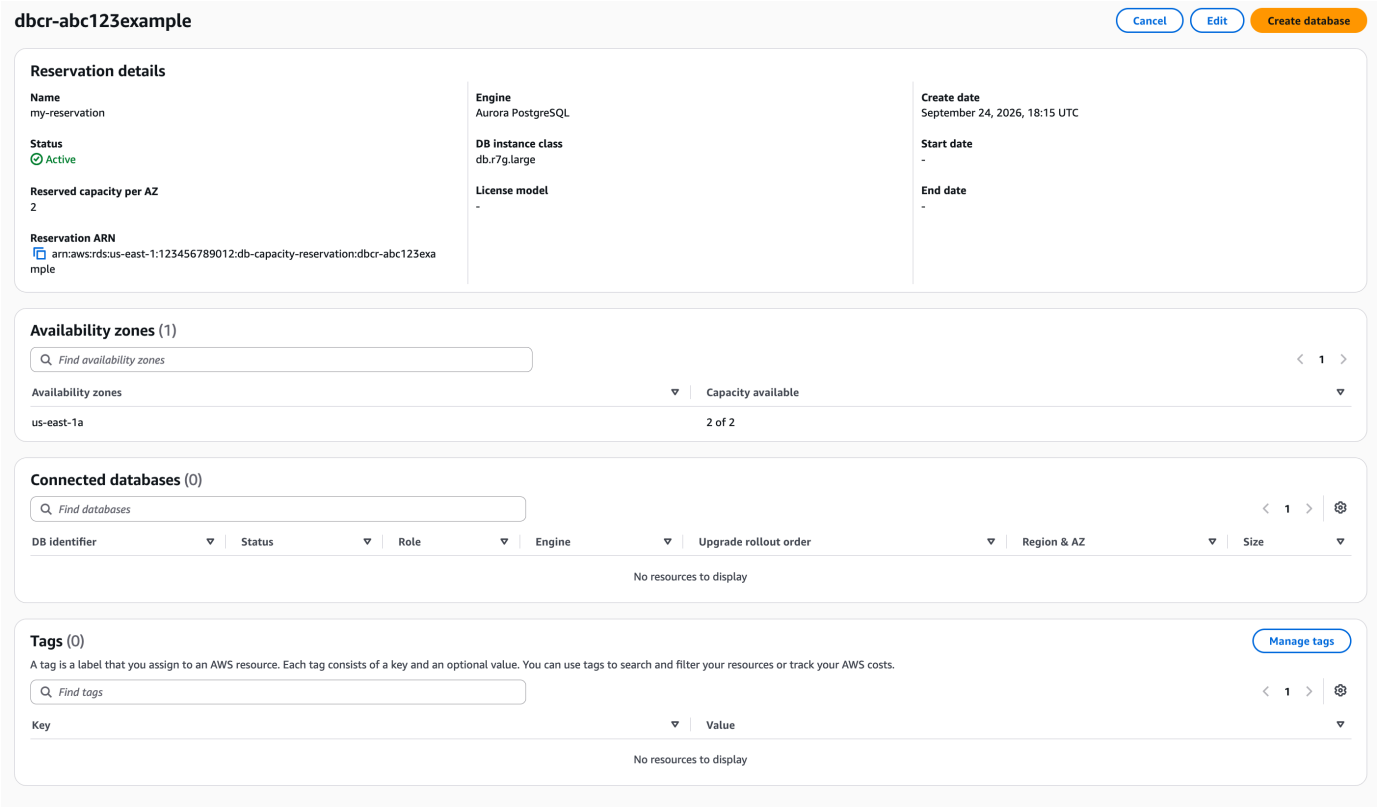

Amazon CLI

Use the [describe-db-capacity-reservations] command.

List all reservations in the Region:

```
aws rds describe-db-capacity-reservations
```

Describe a specific reservation, by name or by ID:

```
aws rds describe-db-capacity-reservations \
    --db-capacity-reservation-identifier my-reservation
```

The response includes `ReservedCapacityPerAvailabilityZone` (capacity reserved in each Availability Zone) and `AvailableCapacityPerAvailabilityZoneList` (capacity not yet in use, broken out by Availability Zone), which you can use to monitor utilization and find which Availability Zone has little available capacity.

RDS API

To view Capacity Reservations by using the Amazon RDS API, call the DescribeDBCapacityReservations operation. You can specify the following optional parameters:

- `DBCapacityReservationIdentifier` – The name or the `dbcr-` ID of the Capacity Reservation. If you don't specify it, the operation returns all the Capacity Reservations in the Region.
- `Filters` – Filters that limit the result. The supported filters are `db-capacity-reservation-name`, `state`, `engine`, `db-instance-class`, and `availability-zone`.
- `MaxRecords` – The maximum number of records to return, from 20 to 100. The default is 100.
- `Marker` – The pagination token from a previous request.

Modifying a Capacity Reservation

You can change the reserved capacity of a reservation, that is, the number of DB instances reserved in each Availability Zone. You can also change its end date.

You can modify a reservation only while it is `active` and has not reached its end date. A future-dated reservation can't be modified while it is in the `assessing`, `scheduled`, or `delayed` state – wait until it becomes active on its start date. Reservations in the `pending`, `expired`, `cancelled`, `failed`, or `unsupported` state can't be modified.


The following limits apply to a change in reserved capacity:

- You can't reduce the capacity below the capacity already in use. The new value must fit the Availability Zone that holds the most DB instances.
- Increasing the capacity depends on capacity being available, and on your account's Capacity Reservation quota.
- While a reservation is still within its commitment duration, you can't reduce its capacity below the committed capacity, and you can't set an end date earlier than the commitment end date. For a reservation that was `delayed`, the capacity limit applies until the original commitment end date, but the end date limit doesn't apply.

Console

To modify a Capacity Reservation

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Capacity reservations**.
3. In the list of reservations, select the reservation.
4. For **Actions**, choose **Edit**.
5. Under **Capacity reservation details**, do the following:
   - For **Reserved capacity per AZ**, enter the new number of DB instances to reserve in each Availability Zone.
   - (Optional) For **Capacity reservation ends**, choose **Manually** to keep the reservation until you cancel it, or **At a specific time** to set an end date.

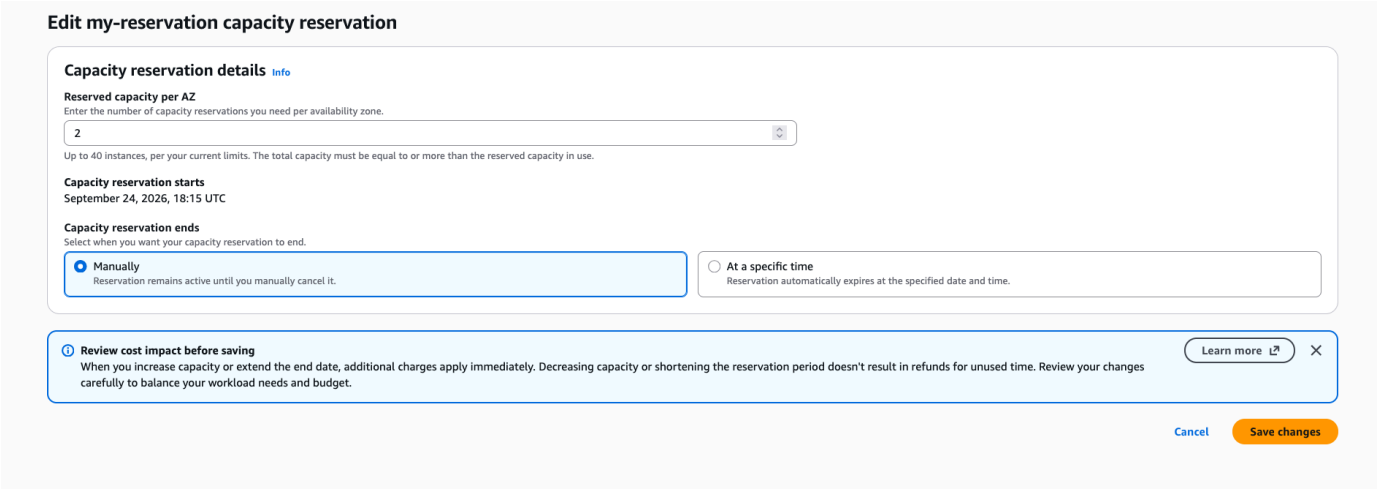

6. Review the cost impact, and then choose **Save changes**. An increase in capacity or a later end date adds charges immediately. A decrease in capacity or an earlier end date doesn't refund charges for the time that has already passed.

Amazon CLI

Use the modify-db-capacity-reservation command.

```
aws rds modify-db-capacity-reservation \
    --db-capacity-reservation-identifier my-reservation \
```

```
    --capacity-per-availability-zone 4
```

The new capacity applies to each Availability Zone in the reservation. Increasing it is subject to capacity being available in all of them. Decreasing it releases the difference and reduces charges.

RDS API

To modify a Capacity Reservation by using the Amazon RDS API, call the ModifyDBCapacityReservation operation with the following parameter:

- `DBCapacityReservationIdentifier` – The name or the `dbcr-` ID of the Capacity Reservation.

Also specify at least one of the following parameters:

- `CapacityPerAvailabilityZone` – The new number of DB instances to reserve in each Availability Zone.
- `EndDateType` – `limited` to set an end date, or `unlimited` to keep the reservation until you cancel it.
- `EndDate` – The new end date, in UTC. Required when `EndDateType` is `limited`.

Canceling a Capacity Reservation

Canceling a reservation releases the reserved capacity and stops the associated charges. Any DB instances currently running in the reservation continue to run as normal On-Demand instances.

You can cancel a reservation that is in the `active`, `assessing`, or `delayed` state:

- `active` – cancel at any time, unless the reservation is still within a commitment duration. A future-dated reservation that has become active can't be canceled until its commitment ends.
- `assessing` – a future-dated reservation can be canceled while Amazon RDS is still evaluating whether it can deliver the capacity, because no commitment has begun.
- `delayed` – if Amazon RDS couldn't deliver the capacity on the requested start date, the commitment is waived and you can cancel the reservation immediately.

A reservation in the `scheduled` state can't be canceled. After Amazon RDS accepts a future-dated request and schedules the capacity, the reservation stays in place until its start date, becomes

active, and can then be canceled only after its commitment duration ends. Take that into account when you choose a start date and a commitment duration.

Reservations in the `pending`, `expired`, `cancelled`, `failed`, or `unsupported` state can't be canceled. An expired or canceled reservation has already released its capacity.

Console

To cancel a Capacity Reservation

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Capacity reservations**.
3. Select the reservation.
4. Choose **Cancel reservation**, and then confirm the cancellation.

Amazon CLI

Use the cancel-db-capacity-reservation command.

```
aws rds cancel-db-capacity-reservation \
    --db-capacity-reservation-identifier my-reservation
```

RDS API

To cancel a Capacity Reservation by using the Amazon RDS API, call the CancelDBCapacityReservation operation with the following parameter:

- `DBCapacityReservationIdentifier` – The name or the `dbcr-` ID of the Capacity Reservation.

Using a Capacity Reservation with an Aurora DB instance

Reserved capacity is used only when you explicitly target the reservation. You reference the reservation by its identifier (`dbcr-`) or its name when you perform any of the following operations:

- Create a DB instance in a DB cluster (`CreateDBInstance`) – for the writer and for each Aurora Replica

- Modify a DB instance to move it into a reservation (`ModifyDBInstance`)

The DB instance's engine, DB instance class, and Availability Zone must match the reservation, and the reservation must have available capacity in that Availability Zone (the matching entry in `AvailableCapacityPerAvailabilityZoneList` has an `AvailableCapacity` greater than 0). If they don't match or no capacity is available, the operation fails with an error that says the Availability Zone doesn't have enough capacity.

> **Note**
>
> Blue/Green Deployments don't support Capacity Reservations.

Console

When you add a DB instance to an Aurora DB cluster in the Amazon RDS console, in the **Capacity reservation** section, choose the reservation to launch into.

Amazon CLI

Add the `--db-capacity-reservation-identifier` parameter to the create or modify command. For example, to create a DB instance that uses a reservation:

```
aws rds create-db-instance \
    --db-instance-identifier my-db-instance \
    --db-cluster-identifier my-aurora-cluster \
    --engine aurora-postgresql \
    --db-instance-class db.r7g.large \
    --availability-zone us-east-1a \
    --db-capacity-reservation-identifier my-reservation
```

The `--db-capacity-reservation-identifier` parameter accepts either the reservation name or its `dbcr-` ID.

To restore into a reservation, restore the DB cluster first, and then add its DB instances with the reservation. A DB cluster restore (`restore-db-cluster-from-snapshot` or `restore-db-cluster-to-point-in-time`) creates the DB cluster without DB instances and doesn't take a Capacity Reservation.

```
aws rds restore-db-cluster-from-snapshot \
```

```
    --db-cluster-identifier my-restored-cluster \
    --snapshot-identifier my-cluster-snapshot \
    --engine aurora-postgresql

aws rds create-db-instance \
    --db-instance-identifier my-restored-instance \
    --db-cluster-identifier my-restored-cluster \
    --engine aurora-postgresql \
    --db-instance-class db.r7g.large \
    --db-capacity-reservation-identifier my-reservation
```

To move an existing DB instance into a reservation, specify the reservation in a modify request that also changes the DB instance class. The reservation must match the configuration that the DB instance has after the change. For example, to scale a DB instance to db.r7g.large and place it in a db.r7g.large reservation:

```
aws rds modify-db-instance \
    --db-instance-identifier my-db-instance \
    --db-instance-class db.r7g.large \
    --db-capacity-reservation-identifier my-reservation \
    --apply-immediately
```

A modify request that specifies a reservation without a DB instance class change fails.

When DB instances are placed into the reservation, the `AvailableCapacity` for the affected Availability Zone decreases. You can track this with `describe-db-capacity-reservations`.

RDS API

Specify the `DBCapacityReservationIdentifier` parameter in the CreateDBInstance or ModifyDBInstance operation.

Stopping and starting a DB cluster in a reservation

You stop and start Aurora DB instances at the DB cluster level. The `stop-db-cluster` and `start-db-cluster` commands don't take the `--db-capacity-reservation-identifier` or `--detach-from-db-capacity-reservation` parameter, so you can't attach a DB instance to a reservation, or detach it, when you stop or start a DB cluster.

When you stop a DB cluster, each DB instance that uses reserved capacity stays associated with its reservation, but the capacity it was using is released back to the reservation.

Because the association persists, starting the DB cluster returns each DB instance to the same reservation. Amazon RDS places it back into the reservation using whatever capacity is available at that point.

> **Important**
>
> Because stopping the DB cluster releases the capacity, another DB instance can take it while the DB cluster is stopped.

The DB instances of a DB cluster can use different reservations. If any of those reservations has no available capacity in its DB instance's Availability Zone, the start fails with an error, and the DB cluster stays stopped. No DB instance in the DB cluster starts, even if the other reservations have capacity. Amazon RDS doesn't fall back to On-Demand capacity, so that each DB instance keeps its reservation. If a DB instance's reservation was canceled or has expired, that DB instance starts with On-Demand capacity and is no longer associated with the reservation.

If Aurora automatically starts a DB cluster after it has been stopped for 7 days, and the reservation has no available capacity, the automatic start is postponed until capacity is available.


Aurora zero-ETL integrations


An Aurora zero-ETL integration with Amazon Redshift and Amazon SageMaker AI enables near real-time analytics and machine learning (ML) using data from Aurora. It's a fully managed solution for making transactional data available in your analytics destination after it is written to an Aurora DB cluster. *Extract, transform,* and *load* (ETL) is the process of combining data from multiple sources into a large, central data warehouse.

A zero-ETL integration makes the data in your Aurora DB cluster available in Amazon Redshift or an Amazon SageMaker AI lakehouse in near real-time. Once that data is in the target data warehouse or data lake, you can power your analytics, ML, and AI workloads using the built-in capabilities, such as machine learning, materialized views, data sharing, federated access to multiple data stores and data lakes, and integrations with Amazon SageMaker AI, Quick, and other Amazon Web Services services.


To create a zero-ETL integration, you specify an Aurora DB cluster as the *source*, and a supported data warehouse or lakehouse as the *target*. The integration replicates data from the source database into the target data warehouse or lakehouse.

The following diagram illustrates this functionality for zero-ETL integration with Amazon Redshift:

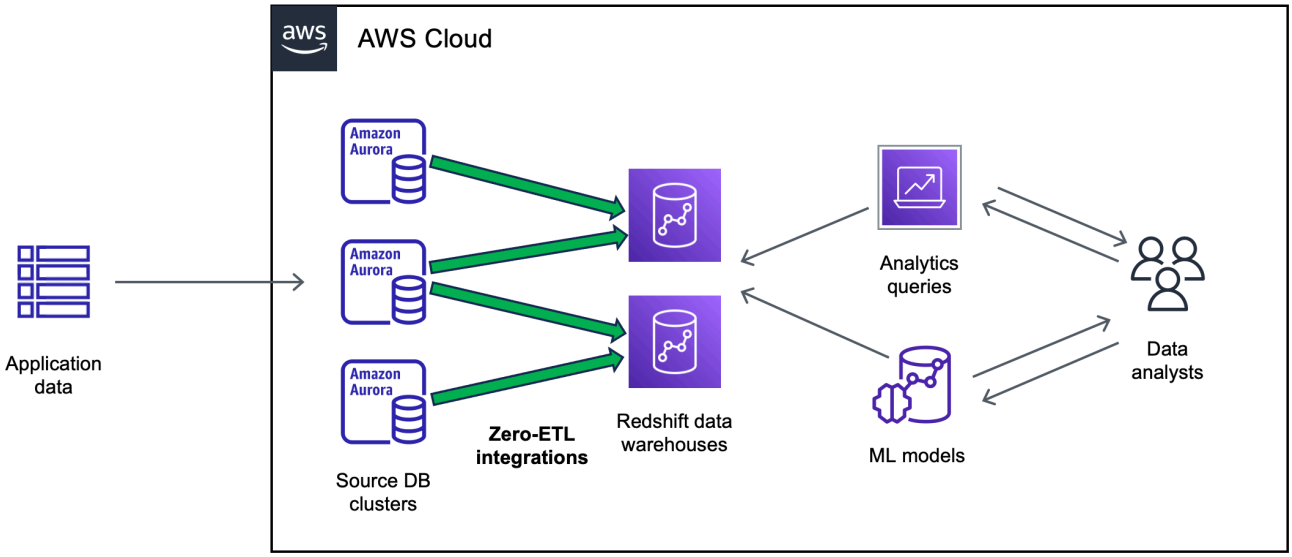

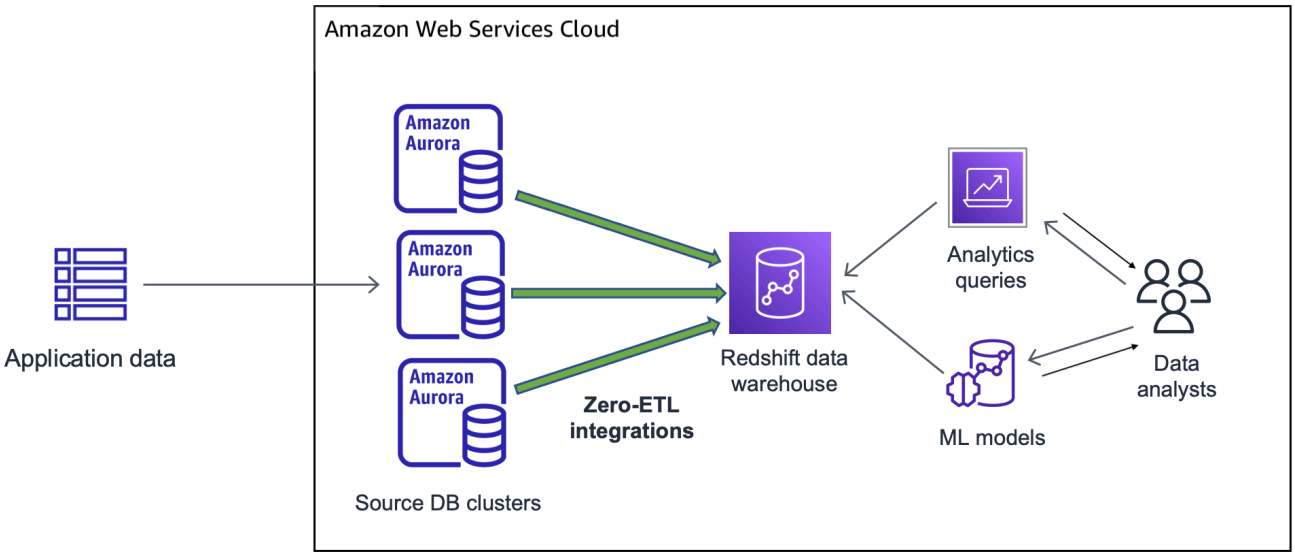

The following diagram illustrates this functionality for zero-ETL integration with an Amazon SageMaker AI lakehouse:

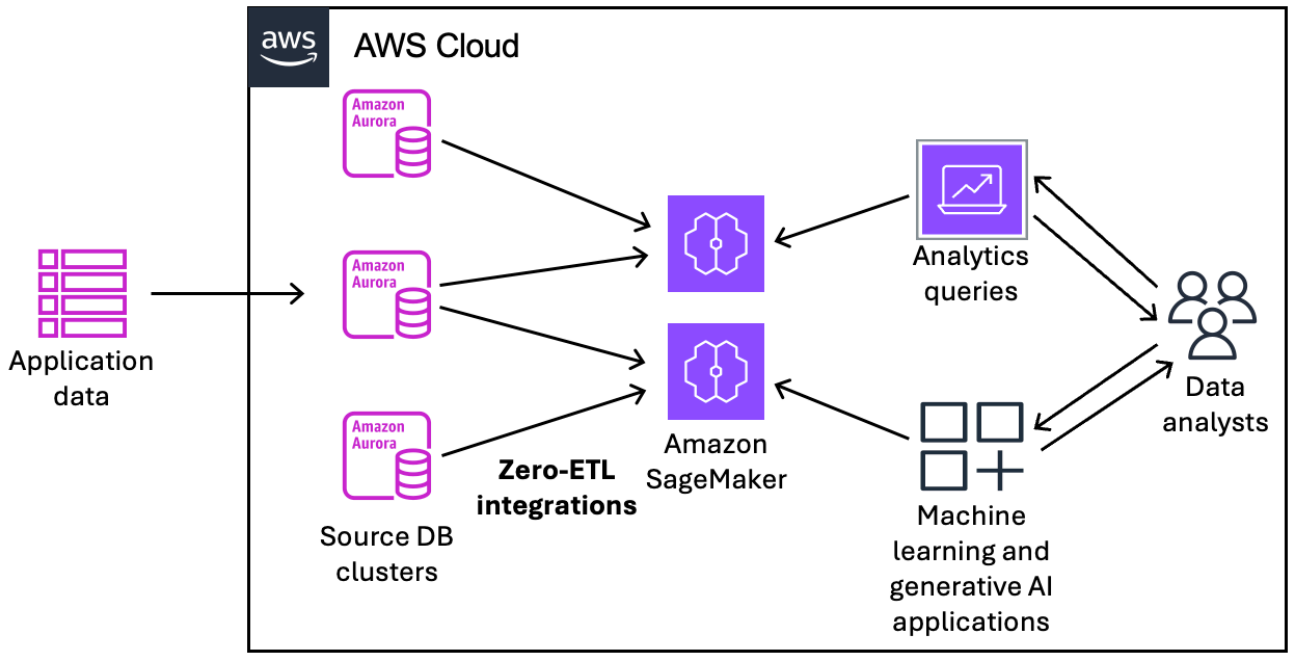

The integration monitors the health of the data pipeline and recovers from issues when possible. You can create integrations from multiple Aurora DB clusters into a single target data warehouse or lakehouse enabling you to derive insights across multiple applications.

For information about pricing for zero-ETL integrations, see Amazon Aurora pricing and Amazon Redshift pricing.

Topics

- Benefits
- Key concepts
- Limitations
- Quotas
- Supported Regions
- Getting started with Aurora zero-ETL integrations
- Creating Aurora zero-ETL integrations with Amazon Redshift
- Creating Aurora zero-ETL integrations with an Amazon SageMaker lakehouse
- Data filtering for Aurora zero-ETL integrations
- Adding data to a source Aurora DB cluster and querying it
- Viewing and monitoring Aurora zero-ETL integrations
- Modifying Aurora zero-ETL integrations
- Deleting Aurora zero-ETL integrations
- Troubleshooting Aurora zero-ETL integrations

Benefits

Aurora zero-ETL integrations have the following benefits:

- Help you derive holistic insights from multiple data sources.
- Eliminate the need to build and maintain complex data pipelines that perform extract, transform, and load (ETL) operations. Zero-ETL integrations remove the challenges that come with building and managing pipelines by provisioning and managing them for you.
- Reduce operational burden and cost, and let you focus on improving your applications.
- Let you leverage the target destination's analytics and ML capabilities to derive insights from transactional and other data, to respond effectively to critical, time-sensitive events.

Key concepts

As you get started with zero-ETL integrations, consider the following concepts:

Integration

A fully managed data pipeline that automatically replicates transactional data and schemas from an Aurora DB cluster to a data warehouse or catalog.

Source DB cluster

The Aurora DB cluster where data is replicated from. You can specify a DB cluster that uses provisioned DB instances or Aurora serverless DB instances as the source.

Target

The data warehouse or lakehouse where the data is replicated to. There are two types of data warehouse: a provisioned cluster data warehouse and a serverless data warehouse. A provisioned cluster data warehouse is a collection of computing resources called nodes, which are organized into a group called a *cluster*. A serverless data warehouse is comprised of a workgroup that stores compute resources, and a namespace that houses the database objects and users. Both data warehouses run an analytics engine and contain one or more databases.

A target lakehouse consists of catalogs, databases, tables, and views. For more information about lakehouse architecture, see SageMaker Lakehouse components in the *Amazon SageMaker AI Unified Studio User Guide*.

Multiple source DB clusters can write to the same target.

For more information, see Data warehouse system architecture in the *Amazon Redshift Developer Guide*.

Limitations

The following limitations apply to Aurora zero-ETL integrations.

Topics

- General limitations
- Aurora MySQL limitations
- Aurora PostgreSQL limitations
- Amazon Redshift limitations
- Amazon SageMaker AI lakehouse limitations

General limitations

- The source DB cluster must be in the same Region as the target.
- You can't rename a DB cluster or any of its instances if it has existing integrations.
- You can't create multiple integrations between the same source and target databases.
- You can't delete a DB cluster that has existing integrations. You must delete all associated integrations first.
- If you stop the source DB cluster, the last few transactions might not be replicated to the target until you resume the cluster.
- If your cluster is the source of a blue/green deployment, the blue and green environments can't have existing zero-ETL integrations during switchover. You must delete the integration first and switch over, then recreate it.
- A DB cluster must contain at least one DB instance in order to be the source of an integration.
- You can't create an integration for a source DB cluster that is a cross-account clone, such as those shared using Amazon Resource Access Manager (Amazon RAM).
- If your source cluster is the primary DB cluster in an Aurora global database and it fails over to one of its secondary clusters, the integration becomes inactive. You must delete and recreate the integration.
- You can't create an integration for a source database that has another integration being actively created.
- When you initially create an integration, or when a table is being resynchronized, data seeding from the source to the target can take 20-25 minutes or more depending on the size of the source database. This delay can lead to increased replica lag.
- Some data types aren't supported. For more information, see the section called “Data type differences”.
- System tables, temporary tables, and views aren't replicated to target warehouses.
- Performing DDL commands (for example `ALTER TABLE`) on a source table can trigger a table resynchronization, making the table unavailable for querying while it's resynchronizing. For more information, see the section called “One or more of my Amazon Redshift tables requires a resync”.

Aurora MySQL limitations

- Your source DB cluster must be running a supported version of Aurora MySQL. For a list of supported versions, see the section called "Zero-ETL integrations ".
- Zero-ETL integrations rely on MySQL binary logging (binlog) to capture ongoing data changes. Don't use binlog-based data filtering, as it can cause data inconsistencies between the source and target databases.
- Zero-ETL integrations are supported only for databases configured to use the InnoDB storage engine.
- Foreign key references with predefined table updates aren't supported. Specifically, `ON DELETE` and `ON UPDATE` rules aren't supported with `CASCADE`, `SET NULL`, and `SET DEFAULT` actions. Attempting to create or update a table with such references to another table will put the table into a failed state.
- XA transactions performed on the source DB cluster cause the integration to enter a state of `Syncing`.

Aurora PostgreSQL limitations

- Your source DB cluster must be running a supported version of Aurora PostgreSQL. For a list of supported versions, see the section called "Zero-ETL integrations ".
- If you select an Aurora PostgreSQL source DB cluster, you must specify at least one data filter pattern. At minimum, the pattern must include a single database (*`database-name`*`.*.*`) for replication to the target warehouse. For more information, see the section called "Data filtering for zero-ETL integrations".
- All databases created within the source Aurora PostgreSQL DB cluster must use UTF-8 encoding.
- When using declarative partitioning, the table partitions will be replicated to Amazon Redshift. However, the partitioned table itself isn't replicated to Amazon Redshift.
- Two-phase transactions aren't supported.
- If you delete all DB instances from a DB cluster that is the source of an integration and then re-add a DB instance, replication breaks between the source and the target clusters.
- The source DB cluster can't use Aurora Limitless Database.
- Primary keys are required on all tables present in the data filter. Any tables without a primary key will be put into the failed state.

Amazon Redshift limitations

For a list of Amazon Redshift limitations related to zero-ETL integrations, see Considerations when using zero-ETL integrations with Amazon Redshift in the *Amazon Redshift Management Guide*.

Amazon SageMaker AI lakehouse limitations

Following is a limitation for Amazon SageMaker AI lakehouse zero-ETL integrations.

- Catalog names are limited to 19 characters in length.

Quotas

Your account has the following quotas related to Aurora zero-ETL integrations. Each quota is per-Region unless otherwise specified.

Name	Default	Description
Integrations	100	The total number of integrations within an Amazon Web Services account.
Integrations per target	50	The number of integrations sending data to a single target data warehouse or lakehouse.
Integrations per source cluster	5	The number of integrations sending data from a single source DB cluster.

In addition, the target warehouse places certain limits on the number of tables allowed in each DB instance or cluster node. For more information about Amazon Redshift quotas and limits, see Quotas and limits in Amazon Redshift in the *Amazon Redshift Management Guide*.

Supported Regions

Aurora zero-ETL integrations are available in a subset of Amazon Web Services Regions. For a list of supported Regions, see the section called “Zero-ETL integrations ”.

Getting started with Aurora zero-ETL integrations

Before you create a zero-ETL integration, configure your Aurora DB cluster and your data warehouse with the required parameters and permissions. During setup, you'll complete the following steps:

1. Create a custom DB cluster parameter group.
2. Create a source DB cluster.
3. Create a target data warehouse for Amazon Redshift or Create a target Amazon SageMaker Lakehouse.

After you complete these tasks, continue to the section called "Creating zero-ETL integrations with Amazon Redshift" or the section called "Creating zero-ETL integrations with an Amazon SageMaker lakehouse".

You can use the Amazon SDKs to automate the setup process for you. For more information, see the section called "Set up an integration using the Amazon SDKs".

> **Tip**
>
> You can have RDS complete these setup steps for you while you're creating the integration, rather than performing them manually. To immediately start creating an integration, see the section called "Creating zero-ETL integrations with Amazon Redshift".

For Step 3, you can choose to create either a target data warehouse (Step 3a) or a target lakehouse (Step 3b) depending on your needs:

- Choose a data warehouse if you need traditional data warehousing capabilities with SQL-based analytics.
- Choose an Amazon SageMaker Lakehouse if you need machine learning capabilities and want to use lakehouse features for data science and ML workflows.

Step 1: Create a custom DB cluster parameter group

Aurora zero-ETL integrations require specific values for the DB cluster parameters that control replication. Specifically, Aurora MySQL requires *enhanced binlog*

(aurora_enhanced_binlog), and Aurora PostgreSQL requires *enhanced logical replication* (aurora.enhanced_logical_replication).

To configure binary logging or logical replication, you must first create a custom DB cluster parameter group, and then associate it with the source DB cluster.

Aurora MySQL (aurora-mysql8.0 family):

- aurora_enhanced_binlog=1
- binlog_backup=0
- binlog_format=ROW
- binlog_replication_globaldb=0
- binlog_row_image=full
- binlog_row_metadata=full

In addition, make sure that the binlog_transaction_compression parameter is *not* set to ON, and that the binlog_row_value_options parameter is *not* set to PARTIAL_JSON.

For more information about Aurora MySQL enhanced binlog, see the section called "Setting up enhanced binlog".

Aurora PostgreSQL (aurora-postgresql16 family):

- rds.logical_replication=1
- aurora.enhanced_logical_replication=1
- aurora.logical_replication_backup=0
- aurora.logical_replication_globaldb=0

Enabling enhanced logical replication (aurora.enhanced_logical_replication) will always write all column values to the write ahead log (WAL) even if REPLICA IDENTITY FULL isn't enabled. This might increase the IOPS for your source DB cluster.

> **Important**
>
> If you enable or disable the aurora.enhanced_logical_replication DB cluster parameter, the primary DB instance invalidates all logical replication slots. This stops

replication from the source to the target, and you must recreate replication slots on the primary DB instance. To prevent interruptions, keep the parameter state consistent during replication.

Step 2: Select or create a source DB cluster

After you create a custom DB cluster parameter group, choose or create an Aurora DB cluster. This cluster will be the source of data replication to the target data warehouse. You can specify a DB cluster that uses provisioned DB instances or Aurora serverless DB instances as the source. For instructions to create a DB cluster, see the section called "Creating a DB cluster" or the section called "Creating an Aurora serverless DB cluster".

The database must be running a supported DB engine version. For a list of supported versions, see the section called "Zero-ETL integrations ".

When you create the database, under **Additional configuration**, change the default **DB cluster parameter group** to the custom parameter group that you created in the previous step.

Note

If you associate the parameter group with the DB cluster *after* the cluster is already created, you must reboot the primary DB instance in the cluster to apply the changes before you can create a zero-ETL integration. For instructions, see the section called "Rebooting an Aurora DB cluster or instance".

Step 3a: Create a target data warehouse

After you create your source DB cluster, you must create and configure a target data warehouse. The data warehouse must meet the following requirements:

- Using an RA3 node type with at least two nodes, or Redshift Serverless.
- Encrypted (if using a provisioned cluster). For more information, see Amazon Redshift database encryption.

For instructions to create a data warehouse, see Creating a cluster for provisioned clusters, or Creating a workgroup with a namespace for Redshift Serverless.

Enable case sensitivity on the data warehouse

For the integration to be successful, the case sensitivity parameter (`enable_case_sensitive_identifier`) must be enabled for the data warehouse. By default, case sensitivity is disabled on all provisioned clusters and Redshift Serverless workgroups.

To enable case sensitivity, perform the following steps depending on your data warehouse type:

- **Provisioned cluster** – To enable case sensitivity on a provisioned cluster, create a custom parameter group with the `enable_case_sensitive_identifier` parameter enabled. Then, associate the parameter group with the cluster. For instructions, see Managing parameter groups using the console or Configuring parameter values using the Amazon CLI.

  > **Note**
  >
  > Remember to reboot the cluster after you associate the custom parameter group with it.

- **Serverless workgroup** – To enable case sensitivity on a Redshift Serverless workgroup, you must use the Amazon CLI. The Amazon Redshift console doesn't currently support modifying Redshift Serverless parameter values. Send the following update-workgroup request:

  ```
  aws redshift-serverless update-workgroup \
    --workgroup-name target-workgroup \
    --config-parameters
   parameterKey=enable_case_sensitive_identifier,parameterValue=true
  ```

  You don't need to reboot a workgroup after you modify its parameter values.

Configure authorization for the data warehouse

After you create a data warehouse, you must configure the source Aurora DB cluster as an authorized integration source. For instructions, see Configure authorization for your Amazon Redshift data warehouse.

Set up an integration using the Amazon SDKs

Rather than setting up each resource manually, you can run the following Python script to automatically set up the required resources for you. The code example uses the Amazon SDK for Python (Boto3) to create a source Amazon Aurora DB cluster and target data warehouse, each with

the required parameter values. It then waits for the databases to be available before creating a zero-ETL integration between them. You can comment out different functions depending on which resources you need to set up.

To install the required dependencies, run the following commands:

```
pip install boto3
pip install time
```

Within the script, optionally modify the names of the source, target, and parameter groups. The final function creates an integration named `my-integration` after the resources are set up.

Python code example

Aurora MySQL

```
import boto3
import time

# Build the client using the default credential configuration.
# You can use the CLI and run 'aws configure' to set access key, secret
# key, and default Region.

rds = boto3.client('rds')
redshift = boto3.client('redshift')
sts = boto3.client('sts')

source_cluster_name = 'my-source-cluster' # A name for the source cluster
source_param_group_name = 'my-source-param-group' # A name for the source parameter
 group
target_cluster_name = 'my-target-cluster' # A name for the target cluster
target_param_group_name = 'my-target-param-group' # A name for the target parameter
 group

def create_source_cluster(*args):
    """Creates a source Aurora MySQL DB cluster"""

    response = rds.create_db_cluster_parameter_group(
        DBClusterParameterGroupName=source_param_group_name,
        DBParameterGroupFamily='aurora-mysql8.0',
        Description='For Aurora MySQL binary logging'
    )
```

```
    print('Created source parameter group: ' + response['DBClusterParameterGroup']
['DBClusterParameterGroupName'])

    response = rds.modify_db_cluster_parameter_group(
        DBClusterParameterGroupName=source_param_group_name,
        Parameters=[
            {
                'ParameterName': 'aurora_enhanced_binlog',
                'ParameterValue': '1',
                'ApplyMethod': 'pending-reboot'
            },
            {
                'ParameterName': 'binlog_backup',
                'ParameterValue': '0',
                'ApplyMethod': 'pending-reboot'
            },
            {
                'ParameterName': 'binlog_format',
                'ParameterValue': 'ROW',
                'ApplyMethod': 'pending-reboot'
            },
            {
                'ParameterName': 'binlog_replication_globaldb',
                'ParameterValue': '0',
                'ApplyMethod': 'pending-reboot'
            },
            {
                'ParameterName': 'binlog_row_image',
                'ParameterValue': 'full',
                'ApplyMethod': 'pending-reboot'
            },
            {
                'ParameterName': 'binlog_row_metadata',
                'ParameterValue': 'full',
                'ApplyMethod': 'pending-reboot'
            }
        ]
    )
    print('Modified source parameter group: ' +
 response['DBClusterParameterGroupName'])

    response = rds.create_db_cluster(
        DBClusterIdentifier=source_cluster_name,
        DBClusterParameterGroupName=source_param_group_name,
```

```
        Engine='aurora-mysql',
        EngineVersion='8.0.mysql_aurora.3.05.2',
        DatabaseName='myauroradb',
        MasterUsername='username',
        MasterUserPassword='Password01**'
    )
    print('Creating source cluster: ' + response['DBCluster']
['DBClusterIdentifier'])
    source_arn = (response['DBCluster']['DBClusterArn'])
    create_target_cluster(target_cluster_name, source_arn, target_param_group_name)

    response = rds.create_db_instance(
        DBInstanceClass='db.r6g.2xlarge',
        DBClusterIdentifier=source_cluster_name,
        DBInstanceIdentifier=source_cluster_name + '-instance',
        Engine='aurora-mysql'
    )
    return(response)

def create_target_cluster(target_cluster_name, source_arn, target_param_group_name):
    """Creates a target Redshift cluster"""

    response = redshift.create_cluster_parameter_group(
        ParameterGroupName=target_param_group_name,
        ParameterGroupFamily='redshift-1.0',
        Description='For Aurora MySQL zero-ETL integrations'
    )
    print('Created target parameter group: ' + response['ClusterParameterGroup']
['ParameterGroupName'])

    response = redshift.modify_cluster_parameter_group(
        ParameterGroupName=target_param_group_name,
        Parameters=[
            {
                'ParameterName': 'enable_case_sensitive_identifier',
                'ParameterValue': 'true'
            }
        ]
    )
    print('Modified target parameter group: ' + response['ParameterGroupName'])

    response = redshift.create_cluster(
        ClusterIdentifier=target_cluster_name,
        NodeType='ra3.4xlarge',
```

```
        NumberOfNodes=2,
        Encrypted=True,
        MasterUsername='username',
        MasterUserPassword='Password01**',
        ClusterParameterGroupName=target_param_group_name
    )
    print('Creating target cluster: ' + response['Cluster']['ClusterIdentifier'])

    # Retrieve the target cluster ARN
    response = redshift.describe_clusters(
        ClusterIdentifier=target_cluster_name
    )
    target_arn = response['Clusters'][0]['ClusterNamespaceArn']

    # Retrieve the current user's account ID
    response = sts.get_caller_identity()
    account_id = response['Account']

    # Create a resource policy specifying cluster ARN and account ID
    response = redshift.put_resource_policy(
        ResourceArn=target_arn,
        Policy='''
        {
            \"Version\":\"2012-10-17\",
            \"Statement\":[
                {\"Effect\":\"Allow\",
                \"Principal\":{
                    \"Service\":\"redshift.amazonaws.com\"
                },
                \"Action\":[\"redshift:AuthorizeInboundIntegration\"],
                \"Condition\":{
                    \"StringEquals\":{
                        \"aws:SourceArn\":\"%s\"}
                    }
                },
                {\"Effect\":\"Allow\",
                \"Principal\":{
                    \"AWS\":\"arn:aws:iam::%s:root\"},
                \"Action\":\"redshift:CreateInboundIntegration\"}
            ]
        }
        ''' % (source_arn, account_id)
    )
    return(response)
```

```
def wait_for_cluster_availability(*args):
    """Waits for both clusters to be available"""

    print('Waiting for clusters to be available...')

    response = rds.describe_db_clusters(
        DBClusterIdentifier=source_cluster_name
    )
    source_status = response['DBClusters'][0]['Status']
    source_arn = response['DBClusters'][0]['DBClusterArn']

    response = rds.describe_db_instances(
        DBInstanceIdentifier=source_cluster_name + '-instance'
    )
    source_instance_status = response['DBInstances'][0]['DBInstanceStatus']

    response = redshift.describe_clusters(
        ClusterIdentifier=target_cluster_name
    )
    target_status = response['Clusters'][0]['ClusterStatus']
    target_arn = response['Clusters'][0]['ClusterNamespaceArn']

    # Every 60 seconds, check whether the clusters are available.
    if source_status != 'available' or target_status != 'available' or
 source_instance_status != 'available':
        time.sleep(60)
        response = wait_for_cluster_availability(
            source_cluster_name, target_cluster_name)
    else:
        print('Clusters available. Ready to create zero-ETL integration.')
        create_integration(source_arn, target_arn)
        return

def create_integration(source_arn, target_arn):
    """Creates a zero-ETL integration using the source and target clusters"""

    response = rds.create_integration(
        SourceArn=source_arn,
        TargetArn=target_arn,
        IntegrationName='my-integration'
    )
    print('Creating integration: ' + response['IntegrationName'])
```

```
def main():
    """main function"""
    create_source_cluster(source_cluster_name, source_param_group_name)
    wait_for_cluster_availability(source_cluster_name, target_cluster_name)

if __name__ == "__main__":
    main()
```

Aurora PostgreSQL

```
import boto3
import time

# Build the client using the default credential configuration.
# You can use the CLI and run 'aws configure' to set access key, secret
# key, and default Region.

rds = boto3.client('rds')
redshift = boto3.client('redshift')
sts = boto3.client('sts')

source_cluster_name = 'my-source-cluster' # A name for the source cluster
source_param_group_name = 'my-source-param-group' # A name for the source parameter
 group
target_cluster_name = 'my-target-cluster' # A name for the target cluster
target_param_group_name = 'my-target-param-group' # A name for the target parameter
 group

def create_source_cluster(*args):
    """Creates a source Aurora PostgreSQL DB cluster"""

    response = rds.create_db_cluster_parameter_group(
        DBClusterParameterGroupName=source_param_group_name,
        DBParameterGroupFamily='aurora-postgresql16',
        Description='For Aurora PostgreSQL logical replication'
    )
    print('Created source parameter group: ' + response['DBClusterParameterGroup']
['DBClusterParameterGroupName'])

    response = rds.modify_db_cluster_parameter_group(
        DBClusterParameterGroupName=source_param_group_name,
        Parameters=[
            {
```

```
                'ParameterName': 'rds.logical_replication',
                'ParameterValue': '1',
                'ApplyMethod': 'pending-reboot'
            },
            {
                'ParameterName': 'aurora.enhanced_logical_replication',
                'ParameterValue': '1',
                'ApplyMethod': 'pending-reboot'
            },
            {
                'ParameterName': 'aurora.logical_replication_backup',
                'ParameterValue': '0',
                'ApplyMethod': 'pending-reboot'
            },
            {
                'ParameterName': 'aurora.logical_replication_globaldb',
                'ParameterValue': '0',
                'ApplyMethod': 'pending-reboot'
            }
        ]
    )
    print('Modified source parameter group: ' +
 response['DBClusterParameterGroupName'])

    response = rds.create_db_cluster(
        DBClusterIdentifier=source_cluster_name,
        DBClusterParameterGroupName=source_param_group_name,
        Engine='aurora-postgresql',
        EngineVersion='16.4.aurora-postgresql',
        DatabaseName='mypostgresdb',
        MasterUsername='username',
        MasterUserPassword='Password01**'
    )
    print('Creating source cluster: ' + response['DBCluster']
['DBClusterIdentifier'])
    source_arn = (response['DBCluster']['DBClusterArn'])
    create_target_cluster(target_cluster_name, source_arn, target_param_group_name)

    response = rds.create_db_instance(
        DBInstanceClass='db.r6g.2xlarge',
        DBClusterIdentifier=source_cluster_name,
        DBInstanceIdentifier=source_cluster_name + '-instance',
        Engine='aurora-postgresql'
    )
```

```
    return(response)

def create_target_cluster(target_cluster_name, source_arn, target_param_group_name):
    """Creates a target Redshift cluster"""

    response = redshift.create_cluster_parameter_group(
        ParameterGroupName=target_param_group_name,
        ParameterGroupFamily='redshift-1.0',
        Description='For Aurora PostgreSQL zero-ETL integrations'
    )
    print('Created target parameter group: ' + response['ClusterParameterGroup']
['ParameterGroupName'])

    response = redshift.modify_cluster_parameter_group(
        ParameterGroupName=target_param_group_name,
        Parameters=[
            {
                'ParameterName': 'enable_case_sensitive_identifier',
                'ParameterValue': 'true'
            }
        ]
    )
    print('Modified target parameter group: ' + response['ParameterGroupName'])

    response = redshift.create_cluster(
        ClusterIdentifier=target_cluster_name,
        NodeType='ra3.4xlarge',
        NumberOfNodes=2,
        Encrypted=True,
        MasterUsername='username',
        MasterUserPassword='Password01**',
        ClusterParameterGroupName=target_param_group_name
    )
    print('Creating target cluster: ' + response['Cluster']['ClusterIdentifier'])

    # Retrieve the target cluster ARN
    response = redshift.describe_clusters(
        ClusterIdentifier=target_cluster_name
    )
    target_arn = response['Clusters'][0]['ClusterNamespaceArn']

    # Retrieve the current user's account ID
    response = sts.get_caller_identity()
    account_id = response['Account']
```

```
    # Create a resource policy specifying cluster ARN and account ID
    response = redshift.put_resource_policy(
        ResourceArn=target_arn,
        Policy='''
        {
            \"Version\":\"2012-10-17\",
            \"Statement\":[
                {\"Effect\":\"Allow\",
                \"Principal\":{
                    \"Service\":\"redshift.amazonaws.com\"
                },
                \"Action\":[\"redshift:AuthorizeInboundIntegration\"],
                \"Condition\":{
                    \"StringEquals\":{
                        \"aws:SourceArn\":\"%s\"}
                    }
                },
                {\"Effect\":\"Allow\",
                \"Principal\":{
                    \"AWS\":\"arn:aws:iam::%s:root\"},
                \"Action\":\"redshift:CreateInboundIntegration\"}
            ]
        }
        ''' % (source_arn, account_id)
    )
    return(response)

def wait_for_cluster_availability(*args):
    """Waits for both clusters to be available"""

    print('Waiting for clusters to be available...')

    response = rds.describe_db_clusters(
        DBClusterIdentifier=source_cluster_name
    )
    source_status = response['DBClusters'][0]['Status']
    source_arn = response['DBClusters'][0]['DBClusterArn']

    response = rds.describe_db_instances(
        DBInstanceIdentifier=source_cluster_name + '-instance'
    )
    source_instance_status = response['DBInstances'][0]['DBInstanceStatus']
```

```
    response = redshift.describe_clusters(
        ClusterIdentifier=target_cluster_name
    )
    target_status = response['Clusters'][0]['ClusterStatus']
    target_arn = response['Clusters'][0]['ClusterNamespaceArn']

    # Every 60 seconds, check whether the clusters are available.
    if source_status != 'available' or target_status != 'available' or
 source_instance_status != 'available':
        time.sleep(60)
        response = wait_for_cluster_availability(
            source_cluster_name, target_cluster_name)
    else:
        print('Clusters available. Ready to create zero-ETL integration.')
        create_integration(source_arn, target_arn)
        return

def create_integration(source_arn, target_arn):
    """Creates a zero-ETL integration using the source and target clusters"""

    response = rds.create_integration(
        SourceArn=source_arn,
        TargetArn=target_arn,
        IntegrationName='my-integration'
    )
    print('Creating integration: ' + response['IntegrationName'])

def main():
    """main function"""
    create_source_cluster(source_cluster_name, source_param_group_name)
    wait_for_cluster_availability(source_cluster_name, target_cluster_name)

if __name__ == "__main__":
    main()
```

Step 3b: Create an Amazon Glue catalog for Amazon SageMaker Lakehouse zero-ETL integration

When creating a zero-ETL integration with an Amazon SageMaker Lakehouse, you must create an Amazon Glue managed catalog in Amazon Lake Formation. The target catalog must be an Amazon Redshift managed catalog. To create an Amazon Redshift managed catalog, first create

the `AWSServiceRoleForRedshift` service-linked role. In the Lake Formation console, add the `AWSServiceRoleForRedshift` as a read-only administrator.

For more information about the previous tasks, see the following topics.

- For information about creating an Amazon Redshift managed catalog, see Creating an Amazon Redshift managed catalog in the Amazon Glue Data Catalog in the *Amazon Lake Formation Developer Guide*.
- For information about the service-linked role for Amazon Redshift, see Using service-linked roles for Amazon Redshift in the *Amazon Redshift Management Guide*.
- For information about read-only administrator permissions for Lake Formation, see Lake Formation personas and IAM permissions reference in the *Amazon Lake Formation Developer Guide*.

Configure permissions for the target Amazon Glue catalog

Before creating a target catalog for zero-ETL integration, you must create the Lake Formation target creation role and the Amazon Glue data transfer role. Use the Lake Formation target creation role to create the target catalog. When creating the target catalog, enter the Glue data transfer role in the **IAM role** field in the **Access from engines section**.

Lake Formation target creation role

The target creation role must be a Lake Formation administrator and requires the following permissions.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "VisualEditor0",
            "Effect": "Allow",
            "Action": "lakeformation:RegisterResource",
            "Resource": "*"
        },
        {
            "Sid": "VisualEditor1",
```

```
            "Effect": "Allow",
            "Action": [
                "s3:PutEncryptionConfiguration",
                "iam:PassRole",
                "glue:CreateCatalog",
                "glue:GetCatalog",
                "s3:PutBucketTagging",
                "s3:PutLifecycleConfiguration",
                "s3:PutBucketPolicy",
                "s3:CreateBucket",
                "redshift-serverless:CreateNamespace",
                "s3:DeleteBucket",
                "s3:PutBucketVersioning",
                "redshift-serverless:CreateWorkgroup"
            ],
            "Resource": [
                "arn:aws-cn:glue:*:111122223333:catalog",
                "arn:aws-cn:glue:*:111122223333:catalog/*",
                "arn:aws-cn:s3:::*",
                "arn:aws-cn:redshift-serverless:*:111122223333:workgroup/*",
                "arn:aws-cn:redshift-serverless:*:111122223333:namespace/*",
                "arn:aws-cn:iam::111122223333:role/
GlueDataCatalogDataTransferRole"
            ]
        }
    ]
}
```

The target creation role must have the following trust relationship.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Principal": {
                "Service": "glue.amazonaws.com"
            },
            "Action": "sts:AssumeRole"
        },
```

```
        {
          "Effect": "Allow",
          "Principal": {
            "AWS": "arn:aws-cn:iam::111122223333:user/Username"
          },
          "Action": "sts:AssumeRole"
        }
    ]
}
```

Glue data transfer role

The Glue data transfer role is required for MySQL catalog operations and must have the following permissions.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "DataTransferRolePolicy",
            "Effect": "Allow",
            "Action": [
                "kms:GenerateDataKey",
                "kms:Decrypt",
                "glue:GetCatalog",
                "glue:GetDatabase"
            ],
            "Resource": [
                "*"
            ]
        }
    ]
}
```

The Glue data transfer role must have the following trust relationship.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Principal": {
                "Service": [
                    "glue.amazonaws.com",
                    "redshift.amazonaws.com"
                ]
            },
            "Action": "sts:AssumeRole"
        }
    ]
}
```

Next steps

With a source Aurora DB cluster and either an Amazon Redshift target data warehouse or Amazon SageMaker Lakehouse, you can create a zero-ETL integration and replicate data. For instructions, see the section called “Creating zero-ETL integrations with Amazon Redshift”.

Creating Aurora zero-ETL integrations with Amazon Redshift

When you create an Aurora zero-ETL integration, you specify the source Aurora DB cluster and the target Amazon Redshift data warehouse. You can also customize encryption settings and add tags. Aurora creates an integration between the source DB cluster and its target. Once the integration is active, any data that you insert into the source DB cluster will be replicated into the configured Amazon Redshift target.

Prerequisites

Before you create a zero-ETL integration, you must create a source DB cluster and a target Amazon Redshift data warehouse. You also must allow replication into the data warehouse by adding the DB cluster as an authorized integration source.

For instructions to complete each of these steps, see the section called "Getting started with zero-ETL integrations".

Required permissions

Certain IAM permissions are required to create a zero-ETL integration. At minimum, you need permissions to perform the following actions:

- Create zero-ETL integrations for the source Aurora DB cluster.
- View and delete all zero-ETL integrations.
- Create inbound integrations into the target data warehouse.

The following sample policies demonstrate the least privilege permissions required to create and manage integrations. You might not need these exact permissions if your user or role has broader permissions, such as an `AdministratorAccess` managed policy.

> **Note**
>
> Redshift Amazon Resource Names (ARNs) have the following format. Note the use of a forward slash (`/`) rather than a colon (`:`) before the serverless namespace UUID.
>
> - Provisioned cluster – `arn:aws:redshift:{region}:{account-id}:namespace:namespace-uuid`
> - Serverless – `arn:aws:redshift-serverless:{region}:{account-id}:namespace/namespace-uuid`

Sample policy for Redshift target

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Sid": "CreateIntegration",
      "Effect": "Allow",
```

```
      "Action": [
        "rds:CreateIntegration"
      ],
      "Resource": [
        "arn:aws-cn:rds:us-east-1:123456789012:db:source-db",
        "arn:aws-cn:rds:us-east-1:123456789012:integration:*"
      ]
    },
    {
      "Sid": "DescribeIntegrationDetails",
      "Effect": "Allow",
      "Action": [
        "rds:DescribeIntegrations"
      ],
      "Resource": [
      "arn:aws-cn:rds:us-east-1:123456789012:integration:*"
  ]
    },
    {
      "Sid": "ChangeIntegrationDetails",
      "Effect": "Allow",
      "Action": [
        "rds:DeleteIntegration",
        "rds:ModifyIntegration"
      ],
      "Resource": [
        "arn:aws-cn:rds:us-east-1:123456789012:integration:*"
      ]
    },
    {
      "Sid": "AllowRedShiftIntegration",
      "Effect": "Allow",
      "Action": [
        "redshift:CreateInboundIntegration"
      ],
      "Resource": [
        "arn:aws-cn:redshift:us-east-1:123456789012:namespace:namespace-uuid"
      ]
    }
  ]
}
```

Choosing a target data warehouse in a different account

If you plan to specify a target Amazon Redshift data warehouse that's in another Amazon Web Services account, you must create a role that allows users in the current account to access resources in the target account. For more information, see Providing access to an IAM user in another Amazon Web Services account that you own.

The role must have the following permissions, which allow the user to view available Amazon Redshift provisioned clusters and Redshift Serverless namespaces in the target account.

Required permissions and trust policy

JSON

```
{
   "Version":"2012-10-17",
   "Statement":[
      {
         "Effect":"Allow",
         "Action":[
            "redshift:DescribeClusters",
            "redshift-serverless:ListNamespaces"
         ],
         "Resource":[
            "*"
         ]
      }
   ]
}
```

The role must have the following trust policy, which specifies the target account ID.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Principal": {
```

```
                "AWS": "arn:aws-cn:iam::111122223333:root"
            },
            "Action": "sts:AssumeRole"
        }
    ]
}
```

For instructions to create the role, see Creating a role using custom trust policies.

Creating zero-ETL integrations

You can create a zero-ETL integration using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

> **Important**
>
> zero-ETL integrations do not support refresh or resync operations. If you encounter issues with an integration after creation, you must delete the integration and create a new one.

RDS console

To create a zero-ETL integration

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the left navigation pane, choose **Zero-ETL integrations**.
3. Choose **Create zero-ETL integration**.
4. For **Integration identifier**, enter a name for the integration. The name can have up to 63 alphanumeric characters and can include hyphens.

   > **Important**
   >
   > Catalog names are limited to 19 characters in length. Ensure your integration identifier meets this requirement if it will be used as a catalog name.

5. Choose **Next**.
6. For **Source**, select the Aurora DB cluster where the data will originate from.

> **Note**
>
> RDS notifies you if the DB cluster parameters aren't configured correctly. If you receive this message, you can either choose **Fix it for me**, or configure them manually. For instructions to fix them manually, see the section called "Step 1: Create a custom DB cluster parameter group".
> Modifying DB cluster parameters requires a reboot. Before you can create the integration, the reboot must be complete and the new parameter values must be successfully applied to the cluster.

7. (Optional) Select **Customize data filtering options** and add data filters to your integration. You can use data filters to define the scope of replication to the target data warehouse. For more information, see the section called "Data filtering for zero-ETL integrations".
8. Once your source DB cluster is successfully configured, choose **Next**.
9. For **Target**, do the following:

    1. (Optional) To use a different Amazon Web Services account for the Amazon Redshift target, choose **Specify a different account**. Then, enter the ARN of an IAM role with permissions to display your data warehouses. For instructions to create the IAM role, see the section called "Choosing a target data warehouse in a different account".
    2. For **Amazon Redshift data warehouse**, select the target for replicated data from the source DB cluster. You can choose a provisioned Amazon Redshift *cluster* or a Redshift Serverless *namespace* as the target.

> **Note**
>
> RDS notifies you if the resource policy or case sensitivity settings for the specified data warehouse aren't configured correctly. If you receive this message, you can either choose **Fix it for me**, or configure them manually. For instructions to fix them manually, see Turn on case sensitivity for your data warehouse and Configure authorization for your data warehouse in the *Amazon Redshift Management Guide*.
> Modifying case sensitivity for a *provisioned* Redshift cluster requires a reboot. Before you can create the integration, the reboot must be complete and the new parameter value must be successfully applied to the cluster.

If your selected source and target are in different Amazon Web Services accounts, then Amazon RDS cannot fix these settings for you. You must navigate to the other account and fix them manually in Amazon Redshift.

10. Once your target data warehouse is configured correctly, choose **Next**.
11. (Optional) For **Tags**, add one or more tags to the integration. For more information, see the section called "Tagging Aurora and RDS resources".
12. For **Encryption**, specify how you want your integration to be encrypted. By default, RDS encrypts all integrations with an Amazon owned key. To choose a customer managed key instead, enable **Customize encryption settings** and choose a KMS key to use for encryption. For more information, see the section called "Encrypting Amazon Aurora resources".

    Optionally, add an encryption context. For more information, see Encryption context in the *Amazon Key Management Service Developer Guide*.

    Note

    Amazon RDS adds the following encryption context pairs in addition to any that you add:

    - `aws:redshift:integration:arn` - `IntegrationArn`
    - `aws:servicename:id` - `Redshift`

    This reduces the overall number of pairs that you can add from 8 to 6, and contributes to the overall character limit of the grant constraint. For more information, see Using grant constraints in the *Amazon Key Management Service Developer Guide*.
13. Choose **Next**.
14. Review your integration settings and choose **Create zero-ETL integration**.

    If creation fails, see the section called "I can't create a zero-ETL integration" for troubleshooting steps.

The integration has a status of `Creating` while it's being created, and the target Amazon Redshift data warehouse has a status of `Modifying`. During this time, you can't query the data warehouse or make any configuration changes on it.

When the integration is successfully created, the status of the integration and the target Amazon Redshift data warehouse both change to `Active`.

Amazon CLI

To create a zero-ETL integration using the Amazon CLI, use the create-integration command with the following options:

> **Note**
>
> Remember that catalog names are limited to 19 characters. Choose your integration name accordingly if it will be used as a catalog name.

- `--integration-name` – Specify a name for the integration.
- `--source-arn` – Specify the ARN of the Aurora DB cluster that will be the source for the integration.
- `--target-arn` – Specify the ARN of the Amazon Redshift data warehouse that will be the target for the integration.

Example

For Linux, macOS, or Unix:

```
aws rds create-integration \
    --integration-name my-integration \
    --source-arn arn:aws:rds:{region}:{account-id}:my-db \
    --target-arn arn:aws:redshift:{region}:{account-id}:namespace:namespace-uuid
```

For Windows:

```
aws rds create-integration ^
    --integration-name my-integration ^
    --source-arn arn:aws:rds:{region}:{account-id}:my-db ^
    --target-arn arn:aws:redshift:{region}:{account-id}:namespace:namespace-uuid
```

RDS API

To create a zero-ETL integration by using the Amazon RDS API, use the `CreateIntegration` operation with the following parameters:

> **Note**
>
> Catalog names are limited to 19 characters. Ensure your IntegrationName parameter meets this requirement if it will be used as a catalog name.

- `IntegrationName` – Specify a name for the integration.
- `SourceArn` – Specify the ARN of the Aurora DB cluster that will be the source for the integration.
- `TargetArn` – Specify the ARN of the Amazon Redshift data warehouse that will be the target for the integration.

Encrypting integrations with a customer managed key

If you specify a custom KMS key rather than an Amazon owned key when you create an integration, the key policy must provide the Amazon Redshift service principal access to the `CreateGrant` action. In addition, it must allow the current user to perform to the `DescribeKey` and `CreateGrant` actions.

The following sample policy demonstrates how to provide the required permissions in the key policy. It includes context keys to further reduce the scope of permissions.

Sample key policy

JSON

```
{
    "Version":"2012-10-17",
    "Id": "Key policy",
    "Statement": [
        {
            "Sid": "Enables IAM user permissions",
            "Effect": "Allow",
            "Principal": {
                "AWS": "arn:aws-cn:iam::111122223333:root"
            },
            "Action": "kms:*",
            "Resource": "*"
        },
```

```
        {
            "Sid": "Allows the Redshift service principal to add a grant to a KMS
key",
            "Effect": "Allow",
            "Principal": {
                "Service": "redshift.amazonaws.com"
            },
            "Action": "kms:CreateGrant",
            "Resource": "*",
            "Condition": {
                "StringEquals": {
                    "kms:EncryptionContext:{context-key}": "{context-value}"
                },
                "ForAllValues:StringEquals": {
                    "kms:GrantOperations": [
                        "Decrypt",
                        "GenerateDataKey",
                        "CreateGrant"
                    ]
                }
            }
        },
        {
            "Sid": "Allows the current user or role to add a grant to a KMS key",
            "Effect": "Allow",
            "Principal": {
                "AWS": "arn:aws-cn:iam::111122223333:role/{role-name}"
            },
            "Action": "kms:CreateGrant",
            "Resource": "*",
            "Condition": {
                "StringEquals": {
                    "kms:EncryptionContext:{context-key}": "{context-value}",
                    "kms:ViaService": "rds.us-east-1.amazonaws.com"
                },
                "ForAllValues:StringEquals": {
                    "kms:GrantOperations": [
                        "Decrypt",
                        "GenerateDataKey",
                        "CreateGrant"
                    ]
                }
            }
        },
```

```
        {
            "Sid": "Allows the current uer or role to retrieve information about
 a KMS key",
            "Effect": "Allow",
            "Principal": {
                "AWS": "arn:aws-cn:iam::111122223333:role/{role-name}"
            },
            "Action": "kms:DescribeKey",
            "Resource": "*"
        }
    ]
}
```

For more information, see Creating a key policy in the *Amazon Key Management Service Developer Guide*.

Next steps

After you successfully create a zero-ETL integration, you must create a destination database within your target Amazon Redshift cluster or workgroup. Then, you can start adding data to the source Aurora DB cluster and querying it in Amazon Redshift. For instructions, see Creating destination databases in Amazon Redshift.

Creating Aurora zero-ETL integrations with an Amazon SageMaker lakehouse

When you create an Aurora zero-ETL integration with an Amazon SageMaker lakehouse, you specify the source Aurora DB cluster and the target Amazon Glue managed catalog. You can also customize encryption settings and add tags. Aurora creates an integration between the source DB cluster and its target. Once the integration is active, any data that you insert into the source DB cluster will be replicated into the configured target.

Prerequisites

Before you create a zero-ETL integration with an Amazon SageMaker lakehouse, you must create a source DB cluster and a target Amazon Glue managed catalog. You also must allow replication into the catalog by adding the DB cluster as an authorized integration source.

For instructions to complete each of these steps, see the section called "Getting started with zero-ETL integrations".

Required permissions

Certain IAM permissions are required to create a zero-ETL integration with an Amazon SageMaker lakehouse. At minimum, you need permissions to perform the following actions:

- Create zero-ETL integrations for the source Aurora DB cluster.
- View and delete all zero-ETL integrations.
- Create inbound integrations into the target Amazon Glue managed catalog.
- Access Amazon S3 buckets used by the Amazon Glue managed catalog.
- Use Amazon KMS keys for encryption if custom encryption is configured.
- Register resources with Lake Formation.
- Put resource policy on the Amazon Glue managed catalog to authorize inbound integrations.

The following sample policy demonstrates the least privilege permissions required to create and manage integrations with an Amazon SageMaker lakehouse. You might not need these exact permissions if your user or role has broader permissions, such as an `AdministratorAccess` managed policy.

Additionally, you must configure a resource policy on the target Amazon Glue managed catalog to authorize inbound integrations. Use the following Amazon CLI command to apply the resource policy.

Sample Amazon CLI command to authorize inbound integrations on the target catalog

```
aws glue put-resource-policy \
      --policy-in-json  '{
    "Version": "2012-10-17",
    "Statement": [{
        "Effect": "Allow",
        "Principal": {
            "Service": "glue.amazonaws.com"
        },
        "Action": [
            "glue:AuthorizeInboundIntegration"
        ],
```

```
        "Resource": ["arn:aws:glue:region:account_id:catalog/catalog_name"],
        "Condition": {
            "StringEquals": {
                "aws:SourceArn": "arn:aws:rds:region:account_id:db:source_name"
            }
        }
    },
    {
        "Effect": "Allow",
        "Principal": {
            "AWS": "account_id"
        },
        "Action": ["glue:CreateInboundIntegration"],
        "Resource": ["arn:aws:glue:region:account_id:catalog/catalog_name"]
    }
    ]
}' \
      --region region
```

Note

Glue catalog Amazon Resource Names (ARNs) have the following format:

- Glue catalog – `arn:aws:glue:{region}:{account-id}:catalog/catalog-name`

Choosing a target Amazon Glue managed catalog in a different account

If you plan to specify a target Amazon Glue managed catalog that's in another Amazon Web Services account, you must create a role that allows users in the current account to access resources in the target account. For more information, see Providing access to an IAM user in another Amazon Web Services account that you own.

The role must have the following permissions, which allow the user to view available Amazon Glue catalogs in the target account.

Required permissions and trust policy

JSON

```
{
```

```
   "Version":"2012-10-17",
   "Statement":[
      {
         "Effect":"Allow",
         "Action":[
            "glue:GetCatalog"
         ],
         "Resource":[
            "*"
         ]
      }
   ]
}
```

The role must have the following trust policy, which specifies the target account ID.

JSON

```
{
   "Version":"2012-10-17",
   "Statement":[
      {
         "Effect":"Allow",
         "Principal":{
            "AWS": "arn:aws-cn:iam::111122223333:root"
         },
         "Action":"sts:AssumeRole"
      }
   ]
}
```

For instructions to create the role, see Creating a role using custom trust policies.

Creating zero-ETL integrations with an Amazon SageMaker lakehouse

You can create a zero-ETL integration with an Amazon SageMaker lakehouse using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

> **Important**
>
> Zero-ETL integrations with an Amazon SageMaker lakehouse do not support refresh or resync operations. If you encounter issues with an integration after creation, you must delete the integration and create a new one.

RDS console

To create a zero-ETL integration with an Amazon SageMaker lakehouse

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the left navigation pane, choose **Zero-ETL integrations**.
3. Choose **Create zero-ETL integration**.
4. For **Integration identifier**, enter a name for the integration. The name can have up to 63 alphanumeric characters and can include hyphens.
5. Choose **Next**.
6. For **Source**, select the Aurora DB cluster where the data will originate from.

   > **Note**
   >
   > RDS notifies you if the DB cluster parameters aren't configured correctly. If you receive this message, you can either choose **Fix it for me**, or configure them manually. For instructions to fix them manually, see the section called "Step 1: Create a custom DB cluster parameter group".
   > Modifying DB cluster parameters requires a reboot. Before you can create the integration, the reboot must be complete and the new parameter values must be successfully applied to the cluster.

7. (Optional) Select **Customize data filtering options** and add data filters to your integration. You can use data filters to define the scope of replication to the target Amazon SageMaker lakehouse. For more information, see the section called "Data filtering for zero-ETL integrations".
8. Once your source DB cluster is successfully configured, choose **Next**.
9. For **Target**, do the following:

1. (Optional) To use a different Amazon Web Services account for the Amazon SageMaker lakehouse target, choose **Specify a different account**. Then, enter the ARN of an IAM role with permissions to display your Amazon Glue catalogs. For instructions to create the IAM role, see the section called “Choosing a target Amazon Glue managed catalog in a different account”.
2. For **Amazon Glue catalog**, select the target for replicated data from the source DB cluster. You can choose an existing Amazon Glue managed catalog as the target.
3. The target IAM role needs describe permissions on the target catalog and must have the following permissions:

   JSON

   ```
   {
       "Version":"2012-10-17",
       "Statement": [
           {
               "Sid": "VisualEditor0",
               "Effect": "Allow",
               "Action": "glue:GetCatalog",
               "Resource": [
                   "arn:aws-cn:glue:us-east-1:111122223333:catalog/*",
                   "arn:aws-cn:glue:us-east-1:111122223333:catalog"
               ]
           }
       ]
   }
   ```

   The target IAM role must have the following trust relationship:

   JSON

   ```
   {
       "Version":"2012-10-17",
       "Statement": [
           {
               "Effect": "Allow",
               "Principal": {
                   "Service": "glue.amazonaws.com"
               },
               "Action": "sts:AssumeRole"
   ```

```
        }
    ]
}
```

4. You must grant the target IAM role describe permissions for the target Amazon Glue managed catalog with the Lake Formation administrator role created in Step 3b: Create an Amazon Glue catalog for Amazon SageMaker Lakehouse zero-ETL integration.

> **Note**
>
> RDS notifies you if the resource policy or configuration settings for the specified Amazon Glue managed catalog aren't configured correctly. If you receive this message, you can either choose **Fix it for me**, or configure them manually.
> If your selected source and target are in different Amazon Web Services accounts, then Amazon RDS cannot fix these settings for you. You must navigate to the other account and fix them manually in SageMaker Unified Studio.

10. Once your target Amazon Glue managed catalog is configured correctly, choose **Next**.
11. (Optional) For **Tags**, add one or more tags to the integration. For more information, see the section called "Tagging Aurora and RDS resources".
12. For **Encryption**, specify how you want your integration to be encrypted. By default, RDS encrypts all integrations with an Amazon owned key. To choose a customer managed key instead, enable **Customize encryption settings** and choose a KMS key to use for encryption. For more information, see the section called "Encrypting Amazon Aurora resources".

    Optionally, add an encryption context. For more information, see Encryption context in the *Amazon Key Management Service Developer Guide*.

> **Note**
>
> Amazon RDS adds the following encryption context pairs in addition to any that you add:
>
> - `aws:glue:integration:arn` - `IntegrationArn`
> - `aws:servicename:id` - `glue`

This reduces the overall number of pairs that you can add from 8 to 6, and contributes to the overall character limit of the grant constraint. For more information, see Using grant constraints in the *Amazon Key Management Service Developer Guide*.

13. Choose **Next**.
14. Review your integration settings and choose **Create zero-ETL integration**.

    If creation fails, see the section called "Troubleshooting zero-ETL integrations" for troubleshooting steps.

The integration has a status of `Creating` while it's being created, and the target Amazon SageMaker lakehouse has a status of `Modifying`. During this time, you can't query the catalog or make any configuration changes on it.

When the integration is successfully created, the status of the integration and the target Amazon SageMaker lakehouse both change to `Active`.

Amazon CLI

To prepare a target Amazon Glue managed catalog for zero-ETL integration using the Amazon CLI, you must first use the create-integration-resource-property command with the following options:

- `--resource-arn` – Specify the ARN of the Amazon Glue managed catalog that will be the target for the integration.
- `--target-processing-properties` – Specify the ARN of the IAM role to access the target Amazon Glue managed catalog

```
aws glue create-integration-resource-property --region us-east-1
 --resource-arn arn:aws:glue:region:account_id:catalog/catalog_name \
 --target-processing-properties '{"RoleArn" : "arn:aws:iam::account_id:role/
TargetIamRole"}'
```

To create a zero-ETL integration with an Amazon SageMaker lakehouse using the Amazon CLI, use the create-integration command with the following options:

- `--integration-name` – Specify a name for the integration.

- `--source-arn` – Specify the ARN of the Aurora DB cluster that will be the source for the integration.
- `--target-arn` – Specify the ARN of the Amazon Glue managed catalog that will be the target for the integration.

Example

For Linux, macOS, or Unix:

```
aws rds create-integration \
    --integration-name my-sagemaker-integration \
    --source-arn arn:aws:rds:{region}:{account-id}:cluster:my-db \
    --target-arn arn:aws:glue:{region}:{account-id}:catalog/catalog-name
```

For Windows:

```
aws rds create-integration ^
    --integration-name my-sagemaker-integration ^
    --source-arn arn:aws:rds:{region}:{account-id}:cluster:my-db ^
    --target-arn arn:aws:glue:{region}:{account-id}:catalog/catalog-name
```

RDS API

To create a zero-ETL integration with Amazon SageMaker by using the Amazon RDS API, use the `CreateIntegration` operation with the following parameters:

> **Note**
>
> Catalog names are limited to 19 characters. Ensure your IntegrationName parameter meets this requirement if it will be used as a catalog name.

- `IntegrationName` – Specify a name for the integration.
- `SourceArn` – Specify the ARN of the Aurora DB cluster that will be the source for the integration.
- `TargetArn` – Specify the ARN of the Amazon Glue managed catalog that will be the target for the integration.

Encrypting integrations with a customer managed key

If you specify a custom KMS key rather than an Amazon owned key when you create an integration with Amazon SageMaker, the key policy must provide the SageMaker Unified Studio service principal access to the `CreateGrant` action. In addition, it must allow the current user to perform to the `DescribeKey` and `CreateGrant` actions.

The following sample policy demonstrates how to provide the required permissions in the key policy. It includes context keys to further reduce the scope of permissions.

Sample key policy

JSON

```
{
    "Version":"2012-10-17",
    "Id": "Key policy",
    "Statement": [
        {
            "Sid": "EnablesIAMUserPermissions",
            "Effect": "Allow",
            "Principal": {
            "AWS": "arn:aws-cn:iam::111122223333:root"
            },
            "Action": "kms:*",
            "Resource": "*"
        },
        {
            "Sid": "GlueServicePrincipalAddGrant",
            "Effect": "Allow",
            "Principal": {
                "Service": "glue.amazonaws.com"
            },
            "Action": "kms:CreateGrant",
            "Resource": "*",
            "Condition": {
                "StringEquals": {
                    "kms:EncryptionContext:{context-key}":"{context-value}"
                },
                "ForAllValues:StringEquals": {
                    "kms:GrantOperations": [
                        "Decrypt",
```

```
                    "GenerateDataKey",
                    "CreateGrant"
                ]
            }
        }
    },
    {
        "Sid": "AllowsCurrentUserRoleAddGrantKMSKey",
        "Effect": "Allow",
        "Principal": {
        "AWS": "arn:aws-cn:iam::111122223333:role/{role-name}"
        },
        "Action": "kms:CreateGrant",
        "Resource": "*",
        "Condition": {
            "StringEquals": {
                "kms:EncryptionContext:{context-key}":"{context-value}",
                "kms:ViaService": "rds.us-east-1.amazonaws.com"
            },
            "ForAllValues:StringEquals": {
                "kms:GrantOperations": [
                    "Decrypt",
                    "GenerateDataKey",
                    "CreateGrant"
                ]
            }
        }
    },
    {
        "Sid": "AllowsCurrentUserRoleRetrieveKMSKeyInformation",
        "Effect": "Allow",
        "Principal": {
        "AWS": "arn:aws-cn:iam::111122223333:role/{role-name}"
        },
        "Action": "kms:DescribeKey",
        "Resource": "*"
    }
  ]
}
```

For more information, see Creating a key policy in the *Amazon Key Management Service Developer Guide*.

Next steps

After you successfully create a zero-ETL integration with Amazon SageMaker, you can start adding data to the source Aurora DB cluster and querying it in your Amazon SageMaker lakehouse. The data will be automatically replicated and made available for analytics and machine learning workloads.

Data filtering for Aurora zero-ETL integrations

Aurora zero-ETL integrations support data filtering, which lets you control which data is replicated from your source Aurora DB cluster to your target data warehouse. Instead of replicating the entire database, you can apply one or more filters to selectively include or exclude specific tables. This helps you optimize storage and query performance by ensuring that only relevant data is transferred. Currently, filtering is limited to the database and table levels. Column- and row-level filtering are not supported.

Data filtering can be useful when you want to:

- Join certain tables from two or more different source clusters, and you don't need complete data from either cluster.
- Save costs by performing analytics using only a subset of tables rather than an entire fleet of databases.
- Filter out sensitive information—such as phone numbers, addresses, or credit card details—from certain tables.

You can add data filters to a zero-ETL integration using the Amazon Web Services Management Console, the Amazon Command Line Interface (Amazon CLI), or the Amazon RDS API.

If the integration has a provisioned cluster as its target, the cluster must be on patch 180 or higher to use data filtering.

Topics

- Format of a data filter
- Filter logic
- Filter precedence
- Aurora MySQL examples
- Aurora PostgreSQL examples

- Adding data filters to an integration
- Removing data filters from an integration

Format of a data filter

You can define multiple filters for a single integration. Each filter either includes or excludes any existing and future database tables that match one of the patterns in the filter expression. Aurora zero-ETL integrations use Maxwell filter syntax for data filtering.

Each filter has the following elements:


Element	Description
Filter type	An `Include` filter type *includes* all tables that match one of the patterns in the filter expression. An `Exclude` filter type *excludes* all tables that match one of the patterns.
Filter expression	A comma-separated list of patterns. Expressions must use Maxwell filter syntax.
Pattern	A filter pattern in the format *`database`*`.`*`table`* for Aurora MySQL, or *`database`*`.`*`schema`*`.`*`table`* for Aurora PostgreSQL. You can specify literal names, or define regular expressions. **Note** For Aurora MySQL, regular expressio ns are supported in both the database and table name. For Aurora PostgreSQL, regular expressions are supported only in the schema and table name, not in the database name.

Element	Description
	You can't include column-level filters or denylists. A single integration can have a maximum of 99 total patterns. In the console, you can enter patterns within a single filter expressio n, or spread them out among multiple expressions. A single pattern can't exceed 256 characters in length.

Important

If you select an Aurora PostgreSQL source DB cluster, you must specify at least one data filter pattern. At minimum, the pattern must include a single database (*database-name*`.*.*`) for replication to the target data warehouse.

The following image shows the structure of Aurora MySQL data filters in the console:

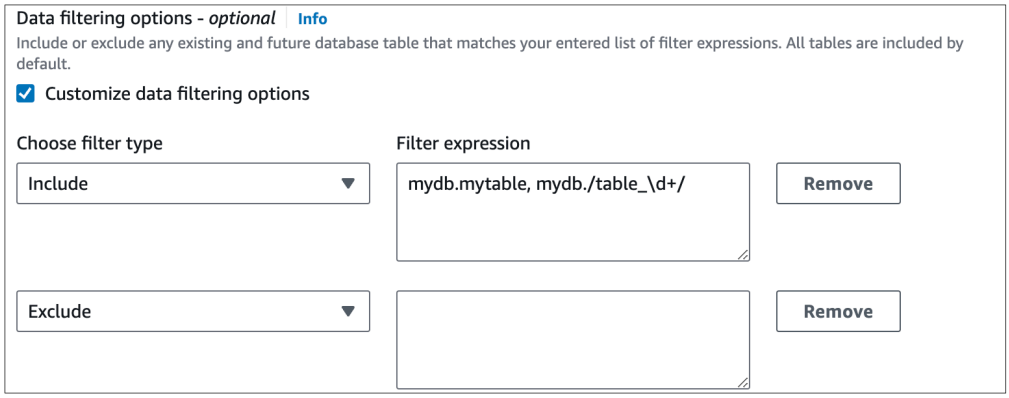

Important

Do not include personally identifying, confidential, or sensitive information in your filter patterns.

Data filters in the Amazon CLI

When using the Amazon CLI to add a data filter, the syntax differs slightly from the console. You must assign a filter type (`Include` or `Exclude`) to each pattern individually, so you can't group multiple patterns under one filter type.

For example, in the console you can group the following comma-separated patterns under a single `Include` statement:

Aurora MySQL

```
mydb.mytable, mydb./table_\d+/
```

Aurora PostgreSQL

```
mydb.myschema.mytable, mydb.myschema./table_\d+/
```

However, when using the Amazon CLI, the same data filter must be in the following format:

Aurora MySQL

```
'include: mydb.mytable, include: mydb./table_\d+/'
```

Aurora PostgreSQL

```
'include: mydb.myschema.mytable, include: mydb.myschema./table_\d+/'
```

Filter logic

If you don't specify any data filters in your integration, Aurora assumes a default filter of `include:*.*`, which replicates all tables to the target data warehouse. However, if you add at least one filter, the default logic switches to `exclude:*.*`, which excludes all tables by default. This lets you explicitly define which databases and tables to include in replication.

For example, if you define the following filter:

```
'include: db.table1, include: db.table2'
```

Aurora evaluates the filter as follows:

```
'exclude:*.*, include: db.table1, include: db.table2'
```

Therefore, Aurora only replicates `table1` and `table2` from the database named db to the target data warehouse.

Filter precedence

Aurora evaluates data filters in the order you specify. In the Amazon Web Services Management Console, it processes filter expressions from left to right and top to bottom. A second filter or an individual pattern that follows the first can override it.

For example, if the first filter is `Include books.stephenking`, it includes only the `stephenking` table from the `books` database. However, if you add a second filter, `Exclude books.*`, it overrides the first filter. This prevents any tables from the `books` index from being replicated to the target data warehouse.

When you specify at least one filter, the logic starts by assuming `exclude:*.*` by default, which automatically *excludes* all tables from replication. As a best practice, define filters from broadest to most specific. Start with one or more `Include` statements to specify the data to replicate, then add `Exclude` filters to selectively remove certain tables.

The same principle applies to filters that you define using the Amazon CLI. Aurora evaluates these filter patterns in the order that you specify them, so a pattern might override one that you specify before it.

Aurora MySQL examples

The following examples demonstrate how data filtering works for Aurora MySQL examples zero-ETL integrations:

- Include all databases and all tables:

  ```
  'include: *.*'
  ```

- Include all tables within the `books` database:

  ```
  'include: books.*'
  ```

- Exclude any tables named `mystery`:

```
'include: *.*, exclude: *.mystery'
```

- Include two specific tables within the `books` database:

```
'include: books.stephen_king, include: books.carolyn_keene'
```

- Include all tables in the `books` database, except for those containing the substring `mystery`:

```
'include: books.*, exclude: books./.*mystery.*/'
```

- Include all tables in the `books` database, except those starting with `mystery`:

```
'include: books.*, exclude: books./mystery.*/'
```

- Include all tables in the `books` database, except those ending with `mystery`:

```
'include: books.*, exclude: books./.*mystery/'
```

- Include all tables in the `books` database that start with `table_`, except for the one named `table_stephen_king`. For example, `table_movies` or `table_books` would be replicated, but not `table_stephen_king`.

```
'include: books./table_.*/, exclude: books.table_stephen_king'
```

Aurora PostgreSQL examples

The following examples demonstrate how data filtering works for Aurora PostgreSQL zero-ETL integrations:

- Include all tables within the `books` database:

```
'include: books.*.*'
```

- Exclude any tables named `mystery` in the `books` database:

```
'include: books.*.*, exclude: books.*.mystery'
```

- Include one table within the `books` database in the `mystery` schema, and one table within `employee` database in the `finance` schema:

```
'include: books.mystery.stephen_king, include: employee.finance.benefits'
```

- Include all tables in the `books` database and `science_fiction` schema, except for those containing the substring `king`:

```
'include: books.science_fiction.*, exclude: books.*./.*king.*/
```

- Include all tables in the `books` database, except those with a schema name starting with `sci`:

```
'include: books.*.*, exclude: books./sci.*/.*'
```

- Include all tables in the `books` database, except those in the `mystery` schema ending with `king`:

```
'include: books.*.*, exclude: books.mystery./.*king/'
```

- Include all tables in the `books` database that start with `table_`, except for the one named `table_stephen_king`. For example, `table_movies` in the `fiction` schema and `table_books` in the `mystery` schema are replicated, but not `table_stephen_king` in either schema:

```
'include: books.*./table_.*/, exclude: books.*.table_stephen_king'
```

Adding data filters to an integration

You can configure data filtering using the Amazon Web Services Management Console, the Amazon CLI, or the Amazon RDS API.


> **Important**
>
> If you add a filter after you create an integration, Aurora treats it as if it always existed. It removes any data in the target data warehouse that doesn't match the new filtering criteria and resynchronizes all affected tables.

RDS console

To add data filters to a zero-ETL integration

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Zero-ETL integrations**. Select the integration that you want to add data filters to, and then choose **Modify**.
3. Under **Source**, add one or more `Include` and `Exclude` statements.

   The following image shows an example of data filters for a MySQL integration:

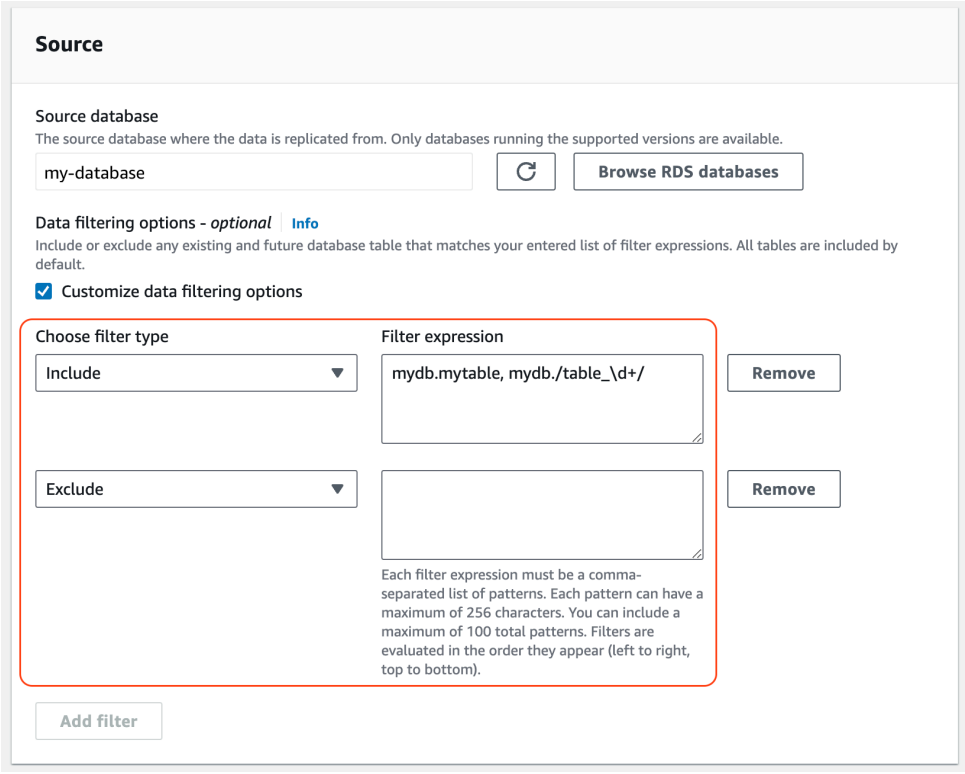

4. When you're satisfied with the changes, choose **Continue** and **Save changes**.

Amazon CLI

To add data filters to a zero-ETL integration using the Amazon CLI, call the modify-integration command. In addition to the integration identifier, specify the `--data-filter` parameter with a comma-separated list of `Include` and `Exclude` Maxwell filters.

Example

The following example adds filter patterns to `my-integration`.

For Linux, macOS, or Unix:

```
aws rds modify-integration \
    --integration-identifier my-integration \
    --data-filter 'include: foodb.*, exclude: foodb.tbl, exclude: foodb./table_\d+/'
```

For Windows:

```
aws rds modify-integration ^
    --integration-identifier my-integration ^
    --data-filter 'include: foodb.*, exclude: foodb.tbl, exclude: foodb./table_\d+/'
```

RDS API

To modify a zero-ETL integration using the RDS API, call the ModifyIntegration operation. Specify the integration identifier and provide a comma-separated list of filter patterns.

Removing data filters from an integration

When you remove a data filter from an integration, Aurora reevaluates the remaining filters as if the removed filter never existed. It then replicates any previously excluded data that now meets the criteria into the target data warehouse. This triggers a resynchronization of all affected tables.

Adding data to a source Aurora DB cluster and querying it

To finish creating a zero-ETL integration that replicates data from Amazon Aurora into Amazon Redshift, you must create a database in the target destination.

For connections with Amazon Redshift, connect to your Amazon Redshift cluster or workgroup and create a database with a reference to your integration identifier. Then, you can add data to your source Aurora DB cluster and see it replicated in Amazon Redshift or Amazon SageMaker.

Topics

- Creating a target database
- Adding data to the source DB cluster
- Querying your Aurora data in Amazon Redshift

- Data type differences between Aurora and Amazon Redshift databases
- DDL operations for Aurora PostgreSQL

Creating a target database

Before you can start replicating data into Amazon Redshift, after you create an integration, you must create a database in your target data warehouse. This database must include a reference to the integration identifier. You can use the Amazon Redshift console or the Query editor v2 to create the database.

For instructions to create a destination database, see Create a destination database in Amazon Redshift.

Adding data to the source DB cluster

After you configure your integration, you can populate the source Aurora DB cluster with data that you want to replicate into your data warehouse.

> **Note**
>
> There are differences between data types in Amazon Aurora and the target analytics warehouse. For a table of data type mappings, see the section called “Data type differences”.

First, connect to the source DB cluster using the MySQL or PostgreSQL client of your choice. For instructions, see the section called “Connecting to a DB cluster”.

Then, create a table and insert a row of sample data.

> **Important**
>
> Make sure that the table has a primary key. Otherwise, it can't be replicated to the target data warehouse.

The pg_dump and pg_restore PostgreSQL utilities initially create tables without a primary key and then add it afterwards. If you're using one of these utilities, we recommend first creating a schema and then loading data in a separate command.

MySQL

The following example uses the MySQL Workbench utility.

```
CREATE DATABASE my_db;

USE my_db;

CREATE TABLE books_table (ID int NOT NULL, Title VARCHAR(50) NOT NULL, Author
 VARCHAR(50) NOT NULL,
Copyright INT NOT NULL, Genre VARCHAR(50) NOT NULL, PRIMARY KEY (ID));

INSERT INTO books_table VALUES (1, 'The Shining', 'Stephen King', 1977, 'Supernatural
 fiction');
```

PostgreSQL

The following example uses the psql PostgreSQL interactive terminal. When connecting to the cluster, include the named database that you specified when creating the integration.

```
psql -h mycluster.cluster-123456789012.us-east-2.rds.amazonaws.com -p 5432 -U username
 -d named_db;

named_db=> CREATE TABLE books_table (ID int NOT NULL, Title VARCHAR(50) NOT NULL,
 Author VARCHAR(50) NOT NULL,
Copyright INT NOT NULL, Genre VARCHAR(50) NOT NULL, PRIMARY KEY (ID));

named_db=> INSERT INTO books_table VALUES (1, 'The Shining', 'Stephen King', 1977,
 'Supernatural fiction');
```

Querying your Aurora data in Amazon Redshift

After you add data to the Aurora DB cluster, it's replicated into the destination database and is ready to be queried.


To query the replicated data

1. Navigate to the Amazon Redshift console and choose **Query editor v2** from the left navigation pane.
2. Connect to your cluster or workgroup and choose your destination database (which you created from the integration) from the dropdown menu (**destination_database** in this

example). For instructions to create a destination database, see Create a destination database in Amazon Redshift.

3. Use a SELECT statement to query your data. In this example, you can run the following command to select all data from the table that you created in the source Aurora DB cluster:

```
SELECT * from my_db."books_table";
```

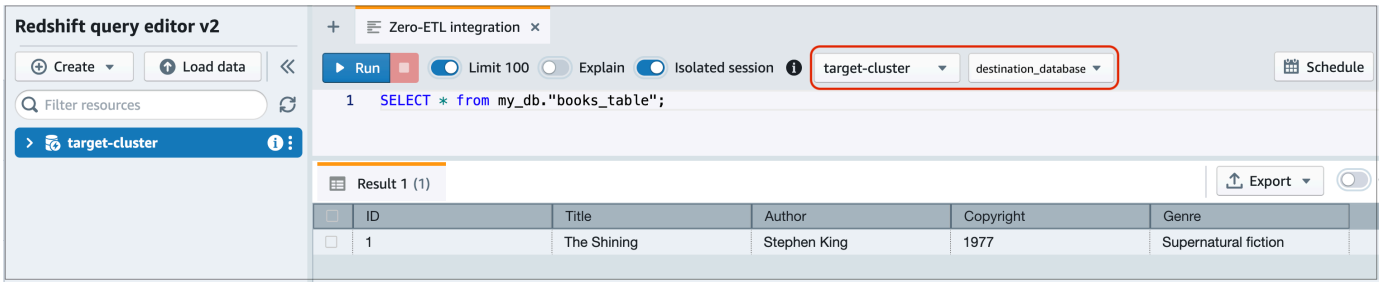

- *my_db* is the Aurora database schema name. This option is only needed for MySQL databases.
- *books_table* is the Aurora table name.

You can also query the data using the a command line client. For example:

```
destination_database=# select * from my_db."books_table";

 ID |       Title |        Author |   Copyright |                  Genre |  txn_seq |
 txn_id
----+-------------+---------------+-------------+------------------------+----------
+--------+
  1 | The Shining |  Stephen King |        1977 |   Supernatural fiction |        2 |
 12192
```

> **Note**
>
> For case-sensitivity, use double quotes (" ") for schema, table, and column names. For more information, see enable_case_sensitive_identifier.

Data type differences between Aurora and Amazon Redshift databases

The following tables show the mappings of Aurora MySQL and Aurora PostgreSQL data types to corresponding destination data types. *Amazon Aurora currently supports only these data types for zero-ETL integrations.*

If a table in your source DB cluster includes an unsupported data type, the table goes out of sync and isn't consumable by the destination target. Streaming from the source to the target continues, but the table with the unsupported data type isn't available. To fix the table and make it available in the target destination, you must manually revert the breaking change and then refresh the integration by running `ALTER DATABASE...INTEGRATION REFRESH`.

> **Note**
>
> You can't refresh zero-ETL integrations with an Amazon SageMaker lakehouse. Instead, delete and try to create the integration again.

Topics

- Aurora MySQL
- Aurora PostgreSQL

Aurora MySQL

Aurora MySQL data type	Target data type	Description	Limitations
INT	INTEGER	Signed four-byte integer	None
SMALLINT	SMALLINT	Signed two-byte integer	None
TINYINT	SMALLINT	Signed two-byte integer	None
MEDIUMINT	INTEGER	Signed four-byte integer	None

Aurora MySQL data type	Target data type	Description	Limitations
BIGINT	BIGINT	Signed eight-byte integer	None
INT UNSIGNED	BIGINT	Signed eight-byte integer	None
TINYINT UNSIGNED	SMALLINT	Signed two-byte integer	None
MEDIUMINT UNSIGNED	INTEGER	Signed four-byte integer	None
BIGINT UNSIGNED	DECIMAL(20,0)	Exact numeric of selectable precision	None
DECIMAL(p,s) = NUMERIC(p,s)	DECIMAL(p,s)	Exact numeric of selectable precision	Precision greater than 38 and scale greater than 37 not supported
DECIMAL(p,s) UNSIGNED = NUMERIC(p,s) UNSIGNED	DECIMAL(p,s)	Exact numeric of selectable precision	Precision greater than 38 and scale greater than 37 not supported
FLOAT4/REAL	REAL	Single precision floating-point number	None
FLOAT4/REAL UNSIGNED	REAL	Single precision floating-point number	None

Aurora MySQL data type	Target data type	Description	Limitations
DOUBLE/REAL/FLOAT8	DOUBLE PRECISION	Double precision floating-point number	None
DOUBLE/REAL/FLOAT8 UNSIGNED	DOUBLE PRECISION	Double precision floating-point number	None
BIT(n)	VARBYTE(8)	Variable-length binary value	None
BINARY(n)	VARBYTE(n)	Variable-length binary value	None
VARBINARY(n)	VARBYTE(n)	Variable-length binary value	None
CHAR(n)	VARCHAR(n)	Variable-length string value	None
VARCHAR(n)	VARCHAR(n)	Variable-length string value	None
TEXT	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
TINYTEXT	VARCHAR(255)	Variable-length string value up to 255 characters	None
MEDIUMTEXT	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None

Aurora MySQL data type	Target data type	Description	Limitations
LONGTEXT	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
ENUM	VARCHAR(1020)	Variable-length string value up to 1,020 characters	None
SET	VARCHAR(1020)	Variable-length string value up to 1,020 characters	None
DATE	DATE	Calendar date (year, month, day)	None
DATETIME	TIMESTAMP	Date and time (without time zone)	None
TIMESTAMP(p)	TIMESTAMP	Date and time (without time zone)	None
TIME	VARCHAR(18)	Variable-length string value up to 18 characters	None
YEAR	VARCHAR(4)	Variable-length string value up to 4 characters	None

Aurora MySQL data type	Target data type	Description	Limitations
JSON	SUPER	Semistructured data or documents as values	None

Aurora PostgreSQL

Zero-ETL integrations for Aurora PostgreSQL don't support custom data types or data types created by extensions. This includes enum types that you create with `CREATE TYPE ... AS ENUM`, and arrays of such types. If a table contains a column with an unsupported data type, Amazon Redshift doesn't replicate the table, and the table state is `Failed`. To replicate the rest of your data, exclude the table by using a data filter. For more information, see Data filtering for Aurora zero-ETL integrations.

Aurora PostgreSQL data type	Amazon Redshift data type	Description	Limitations
array	SUPER	Semistructured data or documents as values	Arrays of unsupported data types, such as enum types, aren't supported
bigint	BIGINT	Signed eight-byte integer	None
bigserial	BIGINT	Signed eight-byte integer	None
bit varying(n)	VARBYTE(n)	Variable-length binary value up to 16,777,216 bytes	None

Aurora PostgreSQL data type	Amazon Redshift data type	Description	Limitations
bit(n)	VARBYTE(n)	Variable-length binary value up to 16,777,216 bytes	None
bit, bit varying	VARBYTE(16777216)	Variable-length binary value up to 16,777,216 bytes	None
boolean	BOOLEAN	Logical boolean (true/false)	None
bytea	VARBYTE(16777216)	Variable-length binary value up to 16,777,216 bytes	None
char(n)	CHAR(n)	Fixed-length character string value up to 65,535 bytes	None
char varying(n)	VARCHAR(65535)	Variable-length character string value up to 65,535 characters	None
cid	BIGINT	Signed eight-byte integer	None
cidr	VARCHAR(19)	Variable-length string value up to 19 characters	None

Aurora PostgreSQL data type	Amazon Redshift data type	Description	Limitations
date	DATE	Calendar date (year, month, day)	Values greater than 294,276 A.D. not supported
double precision	DOUBLE PRECISION	Double precision floating-point numbers	Subnormal values not fully supported
gtsvector	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
inet	VARCHAR(19)	Variable-length string value up to 19 characters	None
integer	INTEGER	Signed four-byte integer	None
int2vector	SUPER	Semistruc tured data or documents as values.	None
interval	INTERVAL	Duration of time	Only INTERVAL types that specify either a year to month or a day to second qualifier are supported.

Aurora PostgreSQL data type	Amazon Redshift data type	Description	Limitations
json	SUPER	Semistructured data or documents as values	None
jsonb	SUPER	Semistructured data or documents as values	None
jsonpath	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
macaddr	VARCHAR(17)	Variable-length string value up to 17 characters	None
macaddr8	VARCHAR(23)	Variable-length string value up to 23 characters	None
money	DECIMAL(20,3)	Currency amount	None
name	VARCHAR(64)	Variable-length string value up to 64 characters	None

Aurora PostgreSQL data type	Amazon Redshift data type	Description	Limitations
numeric(p,s)	DECIMAL(p,s)	User-defined fixed precision value	• NaN values not supported • Precision and scale must be explicitly defined and not greater than 38 (precision) and 37 (scale) • Negative scale not supported
oid	BIGINT	Signed eight-byte integer	None
oidvector	SUPER	Semistructured data or documents as values.	None
pg_brin_bloom_summary	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
pg_dependencies	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
pg_lsn	VARCHAR(17)	Variable-length string value up to 17 characters	None

Aurora PostgreSQL data type	Amazon Redshift data type	Description	Limitations
pg_mcv_list	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
pg_ndistinct	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
pg_node_tree	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
pg_snapshot	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
real	REAL	Single precision floating-point number	Subnormal values not fully supported
refcursor	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
smallint	SMALLINT	Signed two-byte integer	None
smallserial	SMALLINT	Signed two-byte integer	None

Aurora PostgreSQL data type	Amazon Redshift data type	Description	Limitations
serial	INTEGER	Signed four-byte integer	None
text	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
tid	VARCHAR(23)	Variable-length string value up to 23 characters	None
time [(p)] without time zone	VARCHAR(19)	Variable-length string value up to 19 characters	`Infinity` and `-Infinity` values not supported
time [(p)] with time zone	VARCHAR(22)	Variable-length string value up to 22 characters	`Infinity` and `-Infinity` values not supported
timestamp [(p)] without time zone	TIMESTAMP	Date and time (without time zone)	• `Infinity` and `-Infinity` values not supported • Values greater than `9999-12-31` not supported • B.C. values not supported

Aurora PostgreSQL data type	Amazon Redshift data type	Description	Limitations
timestamp [(p)] with time zone	TIMESTAMPTZ	Date and time (with time zone)	• `Infinity` and `-Infinity` values not supported • Values greater than `9999-12-31` not supported • B.C. values not supported
tsquery	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
tsvector	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
txid_snapshot	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None
uuid	VARCHAR(36)	Variable-length 36 character string	None
xid	BIGINT	Signed eight-byte integer	None

Aurora PostgreSQL data type	Amazon Redshift data type	Description	Limitations
xid8	DECIMAL(20, 0)	Fixed precision decimal	None
xml	VARCHAR(65535)	Variable-length string value up to 65,535 characters	None

DDL operations for Aurora PostgreSQL

Amazon Redshift is derived from PostgreSQL, so it shares several features with Aurora PostgreSQL due to their common PostgreSQL architecture. Zero-ETL integrations leverage these similarities to streamline data replication from Aurora PostgreSQL to Amazon Redshift, mapping databases by name and utilizing the shared database, schema, and table structure.

Consider the following points when managing Aurora PostgreSQL zero-ETL integrations:

- Isolation is managed at the database level.
- Replication occurs at the database level.
- Aurora PostgreSQL databases are mapped to Amazon Redshift databases by name, with data flowing to the corresponding renamed Redshift database if the original is renamed.

Despite their similarities, Amazon Redshift and Aurora PostgreSQL have important differences. The following sections outline Amazon Redshift system responses for common DDL operations.

Topics

- Database operations
- Schema operations
- Table operations

Database operations

The following table shows the system responses for database DDL operations.

DDL operation	Redshift system response
`CREATE DATABASE`	No operation
`DROP DATABASE`	Amazon Redshift drops all the data in the target Redshift database.
`RENAME DATABASE`	Amazon Redshift drops all the data in the original target database and resynchro nize the data in the new target database. If the new database doesn't exist, you must manually create it. For instructions, see Create a destination database in Amazon Redshift.

Schema operations

The following table shows the system responses for schema DDL operations.

DDL operation	Redshift system response
`CREATE SCHEMA`	No operation
`DROP SCHEMA`	Amazon Redshift drops the original schema.
`RENAME SCHEMA`	Amazon Redshift drops the original schema then resynchronizes the data in the new schema.

Table operations

The following table shows the system responses for table DDL operations.

DDL operation	Redshift system response
`CREATE TABLE`	Amazon Redshift creates the table.

DDL operation	Redshift system response
	Some operations cause table creation to fail, such as creating a table without a primary key or performing declarative partitioning. For more information, see the section called "Limitations" and the section called "Troubleshooting zero-ETL integrations".
`DROP TABLE`	Amazon Redshift drops the table.
`TRUNCATE TABLE`	Amazon Redshift truncates the table.
`ALTER TABLE (RENAME... )`	Amazon Redshift renames the table or column.
`ALTER TABLE (SET SCHEMA)`	Amazon Redshift drops the table in the original schema and resynchronizes the table in the new schema.
`ALTER TABLE (ADD PRIMARY KEY)`	Amazon Redshift adds a primary key and resynchronizes the table.
`ALTER TABLE (ADD COLUMN)`	Amazon Redshift adds a column to the table.
`ALTER TABLE (DROP COLUMN)`	Amazon Redshift drops the column if it's not a primary key column. Otherwise, it resynchronizes the table.
`ALTER TABLE (SET LOGGED/UNLOGGED )`	If you change the table to logged, Amazon Redshift resynchronizes the table. If you change the table to unlogged, Amazon Redshift drops the table.

Viewing and monitoring Aurora zero-ETL integrations

You can view the details of an Amazon Aurora zero-ETL integration to see its configuration information and current status. You can also monitor the status of your integration by querying specific system views in Amazon Redshift. In addition, Amazon Redshift publishes certain

integration-related metrics to Amazon CloudWatch, which you can view within the Amazon Redshift console.

Topics

- Viewing integrations
- Monitoring integrations using system tables for Amazon Redshift
- Monitoring integrations with Amazon EventBridge for Amazon Redshift


Viewing integrations

You can view Aurora zero-ETL integrations using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To view the details of a zero-ETL integration

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. From the left navigation pane, choose **Zero-ETL integrations**.
3. Select an integration to view more details about it, such as its source DB cluster and target data warehouse.

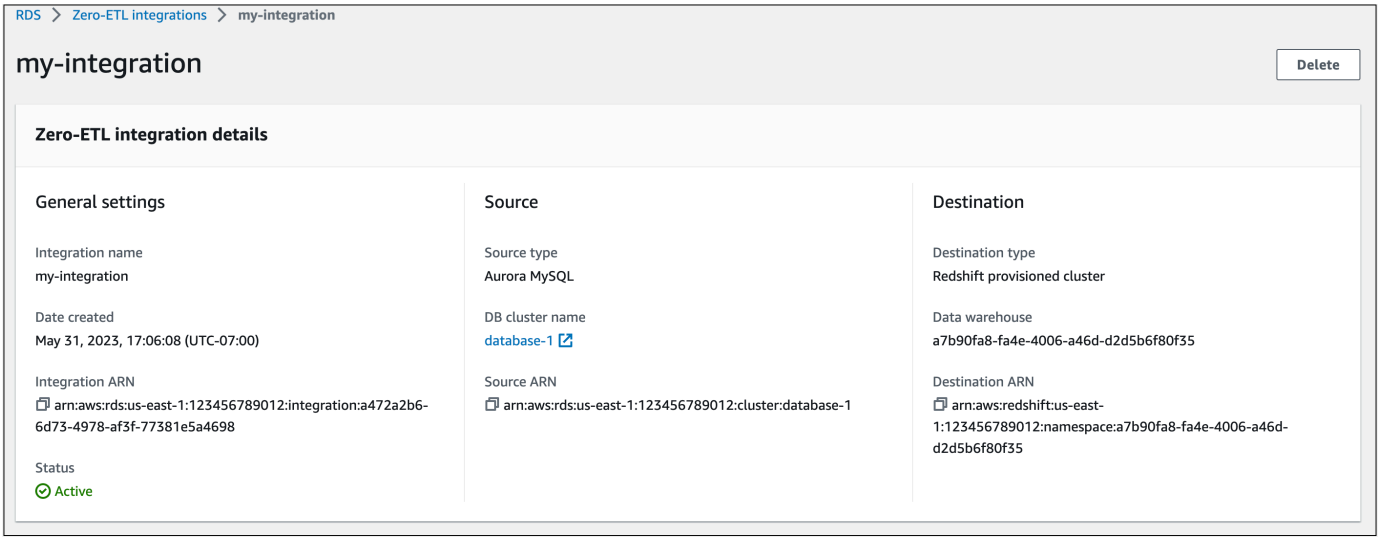

An integration can have the following statuses:

- `Creating` – The integration is being created.
- `Active` – The integration is sending transactional data to the target data warehouse.
- `Syncing` – The integration has encountered a recoverable error and is reseeding data. Affected tables aren't available for querying until they finish resyncing.
- `Needs attention` – The integration encountered an event or error that requires manual intervention to resolve it. To fix the issue, follow the instructions in the error message on the integration details page.
- `Failed` – The integration encountered an unrecoverable event or error that can't be fixed. You must delete and recreate the integration.
- `Deleting` – The integration is being deleted.

Amazon CLI

To view all zero-ETL integrations in the current account using the Amazon CLI, use the describe-integrations command and specify the `--integration-identifier` option.

Example

For Linux, macOS, or Unix:

```
aws rds describe-integrations \
    --integration-identifier ee605691-6c47-48e8-8622-83f99b1af374
```

For Windows:

```
aws rds describe-integrations ^
    --integration-identifier ee605691-6c47-48e8-8622-83f99b1af374
```

RDS API

To view zero-ETL integration using the Amazon RDS API, use the `DescribeIntegrations` operation with the `IntegrationIdentifier` parameter.

Monitoring integrations using system tables for Amazon Redshift

Amazon Redshift has system tables and views that contain information about how the system is functioning. You can query these system tables and views the same way that you would query any

other database table. For more information about system tables and views in Amazon Redshift, see System tables and views reference in the *Amazon Redshift Database Developer Guide*.

You can query the following system views and tables to get information about your Aurora zero-ETL integrations:

- SVV_INTEGRATION – Provides configuration details for your integrations.
- SVV_INTEGRATION_TABLE_STATE – Describes the state of each table within an integration.
- SYS_INTEGRATION_TABLE_STATE_CHANGE – Displays table state change logs for an integration.
- SYS_INTEGRATION_ACTIVITY – Provides information about completed integration runs.

All integration-related Amazon CloudWatch metrics originate from Amazon Redshift. For more information, see Metrics for zero-ETL integrations in the *Amazon Redshift Management Guide*. Currently, Amazon Aurora doesn't publish any integration metrics to CloudWatch.

Monitoring integrations with Amazon EventBridge for Amazon Redshift

Amazon Redshift send integration-related events to Amazon EventBridge. For a list of events and their corresponding event IDs, see Zero-ETL integration event notifications with Amazon EventBridge in the *Amazon Redshift Management Guide*.

Modifying Aurora zero-ETL integrations

You can modify only the name, description, and data filtering options for a zero-ETL integration in a supported data warehouse. You can't modify the Amazon KMS key used to encrypt the integration, or the source or target databases.

If you add a data filter to an existing integration, Aurora reevaluates the filter as if it always existed. It removes any data that is currently in the target data warehouse that doesn't match the new filtering criteria. If you *remove* a data filter from an integration, it replicates any data that previously didn't match the filtering criteria (but now does) into the target data warehouse. For more information, see the section called “Data filtering for zero-ETL integrations”.

You can modify a zero-ETL integration using the Amazon Web Services Management Console, the Amazon CLI, or the Amazon RDS API.

RDS console

To modify a zero-ETL integration

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Zero-ETL integrations**, and then choose the integration that you want to modify.
3. Choose **Modify** and make modifications to any available settings.
4. When all the changes are as you want them, choose **Modify**.

Amazon CLI

To modify a zero-ETL integration using the Amazon CLI, call the modify-integration command. Along with the `--integration-identifier`, specify any of the following options:

- `--integration-name` – Specify a new name for the integration.
- `--description` – Specify a new description for the integration.
- `--data-filter` – Specify data filtering options for the integration. For more information, see the section called "Data filtering for zero-ETL integrations".

Example

The following request modifies an existing integration.

For Linux, macOS, or Unix:

```
aws rds modify-integration \
    --integration-identifier ee605691-6c47-48e8-8622-83f99b1af374 \
    --integration-name my-renamed-integration
```

For Windows:

```
aws rds modify-integration ^
    --integration-identifier ee605691-6c47-48e8-8622-83f99b1af374 ^
    --integration-name my-renamed-integration
```

RDS API

To modify a zero-ETL integration using the RDS API, call the ModifyIntegration operation. Specify the integration identifier, and the parameters that you want to modify.

Deleting Aurora zero-ETL integrations

When you delete a zero-ETL integration, Amazon Aurora removes it from the source Aurora DB cluster. Your transactional data isn't deleted from Amazon Aurora or the analytics destination, but Aurora doesn't send new data to Amazon Redshift or Amazon SageMaker.

You can only delete an integration when it has a status of `Active`, `Failed`, `Syncing`, or `Needs attention`.

You can delete zero-ETL integrations using the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To delete a zero-ETL integration

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. From the left navigation pane, choose **Zero-ETL integrations**.
3. Select the zero-ETL integration that you want to delete.
4. Choose **Actions**, **Delete**, and confirm deletion.

Amazon CLI

To delete a zero-ETL integration, use the delete-integration command and specify the `--integration-identifier` option.

Example

For Linux, macOS, or Unix:

```
aws rds delete-integration \
    --integration-identifier ee605691-6c47-48e8-8622-83f99b1af374
```

For Windows:

```
aws rds delete-integration ^
    --integration-identifier ee605691-6c47-48e8-8622-83f99b1af374
```

RDS API

To delete a zero-ETL integration using the Amazon RDS API, use the `DeleteIntegration` operation with the `IntegrationIdentifier` parameter.

Troubleshooting Aurora zero-ETL integrations

You can check the state of a zero-ETL integration by querying the SVV_INTEGRATION system table in the analytics destination. If the `state` column has a value of `ErrorState`, it means something's wrong. For more information, see the section called “Monitoring using system tables”.

Use the following information to troubleshoot common issues with Aurora zero-ETL integrations.

> **Important**
>
> Resync and refresh operations are not available for zero-ETL integrations with an Amazon SageMaker AI lakehouse. If there are issues with an integration, you must delete the integration and create a new integration. You can't refresh or resync an existing integration.

Topics

- I can't create a zero-ETL integration
- My integration is stuck in a state of Syncing
- My tables aren't replicating to Amazon Redshift
- One or more of my Amazon Redshift tables requires a resync
- Integration failed issues for Amazon SageMaker AI lakehouse zero-ETL integrations
- DDL changes are in Amazon Redshift before the DDL transaction is complete for Aurora PostgreSQL

I can't create a zero-ETL integration

If you can't create a zero-ETL integration, make sure that the following are correct for your source database:

- Your source database must be running a supported DB engine version. For a list of supported versions, see the section called “Zero-ETL integrations ”.
- You correctly configured DB parameters. If the required parameters are set incorrectly or not associated with the database, creation fails. See the section called “Step 1: Create a custom DB cluster parameter group”.

In addition, make sure the following are correct for your target data warehouse:

- Case sensitivity is enabled. See Turn on case sensitivity for your data warehouse.
- You added the correct authorized principal and integration source. See Configure authorization for your Amazon Redshift data warehouse.
- The data warehouse is encrypted (if it's a provisioned cluster). See Amazon Redshift database encryption.

My integration is stuck in a state of `Syncing`

Your integration might consistently show a status of `Syncing` if you change the value of one of the required DB parameters.

To fix this issue, check the values of the parameters in the parameter group associated with the source DB cluster, and make sure that they match the required values. For more information, see the section called “Step 1: Create a custom DB cluster parameter group”.

If you modify any parameters, make sure to reboot the DB cluster to apply the changes.

My tables aren't replicating to Amazon Redshift

If you don't see one or more tables reflected in Amazon Redshift, you can run the following command to resynchronize them:

```
ALTER DATABASE dbname INTEGRATION REFRESH TABLES table1, table2;
```

For more information, see ALTER DATABASE in the Amazon Redshift SQL reference.

Your data might not be replicating because one or more of your source tables doesn't have a primary key. The monitoring dashboard in Amazon Redshift displays the status of these tables as `Failed`, and the status of the overall zero-ETL integration changes to `Needs attention`. To

resolve this issue, you can identify an existing key in your table that can become a primary key, or you can add a synthetic primary key. For detailed solutions, see the following resources:

- Handle tables without primary keys while creating Amazon Aurora MySQL or Amazon RDS for MySQL zero-ETL integrations with Amazon Redshift
- Handle tables without primary keys while creating Amazon Aurora PostgreSQL zero-ETL integrations with Amazon Redshift

One or more of my Amazon Redshift tables requires a resync

Running certain commands on your source database might require your tables to be resynchronized. In these cases, the SVV_INTEGRATION_TABLE_STATE system view shows a `table_state` of `ResyncRequired`, which means that the integration must completely reload data for that specific table from MySQL to Amazon Redshift.

When the table starts to resynchronize, it enters a state of `Syncing`. You don't need to take any manual action to resynchronize a table. While table data is resynchronizing, you can't access it in Amazon Redshift.

The following are some example operations that can put a table into a `ResyncRequired` state, and possible alternatives to consider.

Operation	Example	Alternative
Adding a column into a specific position	`ALTER TABLE table_name ADD COLUMN column_name INTEGER NOT NULL first;`	Amazon Redshift doesn't support adding columns into specific positions using `first` or `after` keywords. If the order of columns

Operation	Example	Alternative
		in the target table isn't critical, add the column to the end of the table using a simpler command: `ALTER TABLE table_name ADD COLUMN column_name column_type ;`

Operation	Example	Alternative
Adding a timestamp column with the default CURRENT_TIMESTAMP	`ALTER TABLE table_name ADD COLUMN column_name TIMESTAMP NOT NULL DEFAULT CURRENT_TIMESTAMP;`	The CURRENT_TIMESTAMP value for existing table rows is calculated by Aurora MySQL and can't be simulated in Amazon Redshift without full table data resynchronization. If possible, switch the default value to a literal constant like 2023-01-01 00:00:15 to avoid latency in table availability.

Operation	Example	Alternative
Performing multiple column operations within a single command	`ALTER TABLE table_name ADD COLUMN column_1, RENAME COLUMN column_2 TO column_3;`	Consider splitting the command into two separate operations, ADD and RENAME, which won't require resynchronization.

Integration failed issues for Amazon SageMaker AI lakehouse zero-ETL integrations

If you encounter issues with an existing zero-ETL integration with an Amazon SageMaker AI lakehouse, the only resolution is to delete the integration and create a new one. Unlike other Amazon services, zero-ETL integrations do not support refresh or resync operations.

To resolve integration issues:

1. Delete the problematic zero-ETL integration using the console, CLI, or API.
2. Verify that the source database and target data warehouse configurations are correct.
3. Create a new zero-ETL integration with the same or updated configuration.

This process will result in a complete re-initialization of the data pipeline, which may take time depending on the size of your source database.

DDL changes are in Amazon Redshift before the DDL transaction is complete for Aurora PostgreSQL

DDL changes can appear in Amazon Redshift before a DDL operation finishes in Aurora PostgreSQL zero-ETL integrations. For more information, see DDL operations for Aurora PostgreSQL.

Using Aurora serverless

Aurora serverless is an on-demand, autoscaling configuration for Amazon Aurora. Aurora serverless helps to automate the processes of monitoring the workload and adjusting the capacity for your databases. Capacity is adjusted automatically based on application demand. You're charged only for the resources that your DB clusters consume. Thus, Aurora serverless can help you to stay within budget and avoid paying for computer resources that you don't use.

This type of automation is especially valuable for multitenant databases, distributed databases, development and test systems, and other environments with highly variable and unpredictable workloads.

Topics

- Aurora serverless use cases
- Advantages of Aurora serverless
- How Aurora serverless works
- Requirements and limitations for Aurora serverless
- Creating a DB cluster that uses Aurora serverless
- Managing Aurora serverless DB clusters
- Performance and scaling for Aurora serverless
- Scaling to Zero ACUs with automatic pause and resume for Aurora serverless

Aurora serverless use cases

Aurora serverless supports many types of database workloads. These range from development and testing environments, to websites and applications that have unpredictable workloads, to the most demanding, business-critical applications that require high scale and availability.

Aurora serverless is especially useful for the following use cases:

- **Variable workloads** – You're running workloads that have sudden and unpredictable increases in activity. An example is a traffic site that sees a surge of activity when it starts raining. Another is an e-commerce site with increased traffic when you offer sales or special promotions. With Aurora serverless, your database automatically scales capacity to meet the needs of the

application's peak load and scales back down when the surge of activity is over. With Aurora serverless, you no longer need to provision for peak or average capacity. You can specify an upper capacity limit to handle the worst-case situation, and that capacity isn't used unless it's needed.

The granularity of scaling in Aurora serverless helps you to match capacity closely to your database's needs. For a provisioned cluster, scaling up requires adding a whole new DB instance. Aurora serverless can add half an ACU when only a little more capacity is needed. It can add 0.5, 1, 1.5, 2, or additional half-ACUs based on the additional capacity needed to handle an increase in workload. And it can remove 0.5, 1, 1.5, 2, or additional half-ACUs when the workload decreases and that capacity is no longer needed.

- **Multi-tenant applications** – With Aurora serverless, you don't have to individually manage database capacity for each application in your fleet. Aurora serverless manages individual database capacity for you.

  You can create a cluster for each tenant. That way, you can use features such as cloning, snapshot restore, and Aurora global databases to enhance high availability and disaster recovery as appropriate for each tenant.

  Each tenant might have specific busy and idle periods depending on the time of day, time of year, promotional events, and so on. Each cluster can have a wide capacity range. That way, clusters with low activity incur minimal DB instance charges. Any cluster can quickly scale up to handle periods of high activity.
- **New applications** – You're deploying a new application and you're unsure about the DB instance size you need. By using Aurora serverless, you can set up a cluster with one or many DB instances and have the database autoscale to the capacity requirements of your application.
- **Mixed-use applications** – Suppose that you have an online transaction processing (OLTP) application, but you periodically experience spikes in query traffic. By specifying promotion tiers for the Aurora serverless DB instances in a cluster, you can configure your cluster so that the reader DB instances can scale independently of the writer DB instance to handle the additional load. When the usage spike subsides, the reader DB instances scale back down to match the capacity of the writer DB instance.
- **Capacity planning** – Suppose that you usually adjust your database capacity, or verify the optimal database capacity for your workload, by modifying the DB instance classes of all the DB instances in a cluster. With Aurora serverless, you can avoid this administrative overhead. You can determine the appropriate minimum and maximum capacity by running the workload and checking how much the DB instances actually scale.

You can modify existing DB instances from provisioned to Aurora serverless or from Aurora serverless to provisioned. You don't need to create a new cluster or a new DB instance in such cases.

With an Aurora global database, you might not need as much capacity for the secondary clusters as in the primary cluster. You can use Aurora serverless DB instances in the secondary clusters. That way, the cluster capacity can scale up if a secondary region is promoted and takes over your application's workload.

- **Development and testing** – In addition to running your most demanding applications, you can also use Aurora serverless for development and testing environments. With Aurora serverless, you can create DB instances with a low minimum capacity instead of using burstable db.t* DB instance classes. You can set the maximum capacity high enough that those DB instances can still run substantial workloads without running low on memory. When the database isn't in use, all of the DB instances scale down to avoid unnecessary charges.

  Tip

  To make it convenient to use Aurora serverless in development and test environments, the Amazon Web Services Management Console provides the **Easy create** shortcut when you create a new cluster. If you choose the **Dev/Test** option, Aurora creates a cluster with an Aurora serverless DB instance and a capacity range that's typical for a development and test system.

Using Aurora serverless for existing provisioned workloads

Suppose that you already have an Aurora application running on a provisioned cluster. You can check how the application would work with Aurora serverless by adding one or more Aurora serverless DB instances to the existing cluster as reader DB instances. You can check how often the reader DB instances scale up and down. You can use the Aurora failover mechanism to promote an Aurora serverless DB instance to be the writer and check how it handles the read/write workload. That way, you can switch over with minimal downtime and without changing the endpoint that your client applications use. For details on the procedure to convert existing clusters to Aurora serverless, see Converting a provisioned writer or reader to Aurora serverless.

Advantages of Aurora serverless

Aurora serverless is intended for variable or "spiky" workloads. With such unpredictable workloads, you might have difficulty planning when to change your database capacity. You might also have trouble making capacity changes quickly enough using the familiar mechanisms such as adding DB instances or changing DB instance classes. Aurora serverless provides the following advantages to help with such use cases:

- **Simpler capacity management than provisioned** – Aurora serverless reduces the effort for planning DB instance sizes and resizing DB instances as the workload changes. It also reduces the effort for maintaining consistent capacity for all the DB instances in a cluster.
- **Faster and easier scaling during periods of high activity** – Aurora serverless scales compute and memory capacity as needed, with no disruption to client transactions or your overall workload. The ability to use reader DB instances with Aurora serverless helps you to take advantage of horizontal scaling in addition to vertical scaling. The ability to use Aurora global databases means that you can spread your Aurora serverless read workload across multiple Amazon Web Services Regions. This capability is more convenient than the scaling mechanisms for provisioned clusters.
- **Cost-effective during periods of low activity** – Aurora serverless helps you to avoid overprovisioning your DB instances. Aurora serverless adds resources in granular increments when DB instances scale up. You pay only for the database resources that you consume. Aurora serverless resource usage is measured on a per-second basis. That way, when a DB instance scales down, the reduced resource usage is registered right away.
- **Greater feature parity with provisioned** – You can use many Aurora features with Aurora serverless oFor example, with Aurora serverless you can use reader DB instances, global databases, Amazon Identity and Access Management (IAM) database authentication, and Performance Insights.

  In particular, with Aurora serverless you can take advantage of the following features from provisioned clusters:

  - **Reader DB instances** – Aurora serverless can take advantage of reader DB instances to scale horizontally. When a cluster contains one or more reader DB instances, the cluster can fail over immediately in case of problems with the writer DB instance.
  - **Multi-AZ clusters** – You can distribute the Aurora serverless DB instances of a cluster across multiple Availability Zones (AZs). Setting up a Multi-AZ cluster helps to ensure business continuity even in the rare case of issues that affect an entire AZ.

- **Global databases** – You can use Aurora serverless in combination with Aurora global databases to create additional read-only copies of your cluster in other Amazon Web Services Regions for disaster recovery purposes.
- **RDS Proxy** – You can use Amazon RDS Proxy to allow your applications to pool and share database connections to improve their ability to scale.

- **Faster, more granular, less disruptive scaling** – Aurora serverless can scale up and down faster. Scaling can change capacity by as little as 0.5 ACUs, instead of doubling or halving the number of ACUs. Scaling typically happens with no pause in processing at all. Scaling doesn't involve an event that you have to be aware of. Scaling can happen while SQL statements are running and transactions are open, without the need to wait for a quiet point.

How Aurora serverless works

The following overview describes how Aurora serverless works.

Topics

- Aurora serverless overview
- Configurations for Aurora DB clusters
- Aurora serverless capacity
- Aurora serverless scaling
- Aurora serverless and high availability
- Aurora serverless and storage
- Configuration parameters for Aurora clusters

Aurora serverless overview

Amazon Aurora serverless is suitable for the most demanding, highly variable workloads. For example, your database usage might be heavy for a short period of time, followed by long periods of light activity or no activity at all. Some examples are retail, gaming, or sports websites with periodic promotional events, and databases that produce reports when needed. Others are development and testing environments, and new applications where usage might ramp up quickly. For cases such as these and many others, configuring capacity correctly in advance isn't always possible with the provisioned model. It can also result in higher costs if you overprovision and have capacity that you don't use.

In contrast, *Aurora provisioned clusters* are suitable for steady workloads. With provisioned clusters, you choose a DB instance class that has a predefined amount of memory, CPU power, I/O bandwidth, and so on. If your workload changes, you manually modify the instance class of your writer and readers. The provisioned model works well when you can adjust capacity in advance of expected consumption patterns and it's acceptable to have brief outages while you change the instance class of the writer and readers in your cluster.

Aurora serverless is architected from the ground up to support serverless DB clusters that are instantly scalable. Aurora serverless is engineered to provide the same degree of security and isolation as with provisioned writers and readers. These aspects are crucial in multitenant serverless cloud environments. The dynamic scaling mechanism has very little overhead so that it can respond quickly to changes in the database workload. It's also powerful enough to meet dramatic increases in processing demand.

By using Aurora serverless, you can create an Aurora DB cluster without being locked into a specific database capacity for each writer and reader. You specify the minimum and maximum capacity range. Aurora scales each Aurora serverless writer or reader in the cluster within that capacity range. By using a Multi-AZ cluster where each writer or reader can scale dynamically, you can take advantage of dynamic scaling and high availability.

Aurora serverless scales the database resources automatically based on your minimum and maximum capacity specifications. Scaling is fast because most scaling events operations keep the writer or reader on the same host. In the rare cases that an Aurora serverless writer or reader is moved from one host to another, Aurora serverless manages the connections automatically. You don't need to change your database client application code or your database connection strings.

With Aurora serverless, as with provisioned clusters, storage capacity and compute capacity are separate. When we refer to Aurora serverless capacity and scaling, it's always compute capacity that's increasing or decreasing. Thus, your cluster can contain many terabytes of data even when the CPU and memory capacity scale down to low levels.

Instead of provisioning and managing database servers, you specify database capacity. For details about Aurora serverless capacity, see Aurora serverless capacity. The actual capacity of each Aurora serverless writer or reader varies over time, depending on your workload. For details about that mechanism, see Aurora serverless scaling.

Important

With Aurora serverless, your cluster can contain readers in addition to the writer. Each Aurora serverless writer and reader can scale between the minimum and maximum capacity values. Thus, the total capacity of your Aurora serverless cluster depends on both the capacity range that you define for your DB cluster and the number of writers and readers in the cluster. At any specific time, you are only charged for the Aurora serverless capacity that is being actively used in your Aurora DB cluster.

Configurations for Aurora DB clusters

For each of your Aurora DB clusters, you can choose any combination of Aurora serverless capacity, provisioned capacity, or both.

You can set up a cluster that contains both Aurora serverless and provisioned capacity, called a *mixed-configuration cluster*. For example, suppose that you need more read/write capacity than is available for an Aurora serverless writer. In this case, you can set up the cluster with a very large provisioned writer. In that case, you can still use Aurora serverless for the readers. Or suppose that the write workload for your cluster varies but the read workload is steady. In this case, you can set up your cluster with an Aurora serverless writer and one or more provisioned readers.

You can also set up a DB cluster where all the capacity is managed by Aurora serverless. To do this, you can create a new cluster and use Aurora serverless from the start. Or you can replace all the provisioned capacity in an existing cluster with Aurora serverless. For example, some of the upgrade paths from older engine versions require starting with a provisioned writer and replacing it with a Aurora serverless writer. For the procedures to create a new DB cluster with Aurora serverless or to switch an existing DB cluster to Aurora serverless, see Creating an Aurora serverless DB cluster and Converting a provisioned writer or reader to Aurora serverless.

If you don't use Aurora serverless at all in a DB cluster, all the writers and readers in the DB cluster are *provisioned*. This is the oldest and most common kind of DB cluster that most users are familiar with. In fact, before Aurora Serverless, there wasn't a special name for this kind of Aurora DB cluster. Provisioned capacity is constant. The charges are relatively easy to forecast. However, you have to predict in advance how much capacity you need. In some cases, your predictions might be inaccurate or your capacity needs might change. In these cases, your DB cluster can become underprovisioned (slower than you want) or overprovisioned (more expensive than you want).

Aurora serverless capacity

The unit of measure for Aurora serverless is the *Aurora capacity unit (ACU)*. Aurora serverless capacity isn't tied to the DB instance classes that you use for provisioned clusters.

Each ACU is a combination of approximately 2 gibibytes (GiB) of memory, corresponding CPU, and networking. You specify the database capacity range (minimum and maximum) using this unit of measure. Aurora serverless offers capacity from 0 ACUs to 256 ACUs for Aurora MySQL and to 384 ACUs for Aurora PostgreSQL. With the minimum capacity of 0 ACUs, the cluster will scale to 0 when there is no workload running.The `ServerlessDatabaseCapacity` and `ACUUtilization` metrics help you to determine how much capacity your database is actually using and where that capacity falls within the specified range.

At any moment in time, each Aurora serverless DB writer or reader has a *capacity*. The capacity is represented as a floating-point number representing ACUs. The capacity increases or decreases whenever the writer or reader scales. This value is measured every second. For each DB cluster where you intend to use Aurora serverless, you define a *capacity range*: the minimum and maximum capacity values that each Aurora serverless writer or reader can scale between. The capacity range is the same for each Aurora serverless writer or reader in a DB cluster. Each Aurora serverless writer or reader has its own capacity, falling somewhere in that range.

The following table shows the Aurora serverless capacity ranges and engine version support for Aurora MySQL and Aurora PostgreSQL.

Capacity range (ACUs)	Aurora MySQL supported versions	Aurora PostgreSQL supported versions
0.5–128	3.02.0 and higher	13.6 and higher, 14.3 and higher, 15.2 and higher, 16.1 and higher
0.5–256	3.06.0 and higher	13.13 and higher, 14.10 and higher, 15.5 and higher, 16.1 and higher
0–256	3.08.0 and higher	13.15 and higher, 14.12 and higher, 15.7 and higher, 16.3 and higher, 17.4 and higher, 18.3 and higher

Capacity range (ACUs)	Aurora MySQL supported versions	Aurora PostgreSQL supported versions
0–384		14.23 and higher, 15.18 and higher, 16.14 and higher, 17.10 and higher, 18.4 and higher

Platform versions in Aurora serverless represent improvements in performance, scaling capabilities or features. Amazon Aurora automatically manages platform version assignments at the cluster level. All new clusters, database restores, and new clones launch with the latest platform version available in your Amazon Web Services Region. When a new platform version becomes available, existing clusters on previous platform versions can be upgraded directly to the latest platform version by applying the pending maintenance, stopping and restarting the cluster, or by using blue/green deployments. Amazon Aurora recommends upgrading to the latest platform version to benefit from all the latest improvements.

The following table shows the Aurora serverless platform versions with their ACU ranges and performance characteristics.

Aurora serverless platform version	ACU range	Performance
1	0–128	Baseline performance
2	0–256	Baseline performance
3	0–256	Up to 30% improved performance compared to platform version 2
4	0-256 (Aurora MySQL),0-384 (Aurora PostgreSQL)	Up to 30% improved performance compared to platform version 3

Note

The available scaling range for a given cluster is determined by both engine version and platform version. It is possible to have a more capable engine version running on a less

capable platform version and vice-versa. The scaling range is determined by the lowest capable engine or platform version. Platform versions should not be confused with Aurora Serverless v1, which is a deprecated product with a different architecture.

Platform version 1, 2, and 3 are available in all regions where Aurora serverless is supported. Platform Version 4 is available in the following regions: US East (N. Virginia), US East (Ohio), US West (N. California), US West (Oregon), Asia Pacific (Hong Kong), Asia Pacific (Hyderabad), Asia Pacific (Jakarta), Asia Pacific (Malaysia), Asia Pacific (Melbourne), Asia Pacific (Mumbai), Asia Pacific (Osaka), Asia Pacific (Seoul), Asia Pacific (Singapore), Asia Pacific (Sydney), Asia Pacific (Tokyo), Canada (Central), Europe (Frankfurt), Europe (Ireland), Europe (London), Europe (Paris), Europe (Spain), Europe (Stockholm), Europe (Zurich), South America (São Paulo), Amazon GovCloud (US-East), and Amazon GovCloud (US-West).

You can determine what platform version your cluster is running on in the Instance Configuration section of the Amazon Web Services Management Console or through the API by viewing the `ServerlessV2PlatformVersion` for a DBCluster.

The smallest Aurora serverless capacity that you can define is 0 ACUs, for Aurora serverless versions that support the auto-pause feature. You can specify a higher number if it's less than or equal to the maximum capacity value. Setting the minimum capacity to a small number lets lightly loaded DB clusters consume minimal compute resources. At the same time, they stay ready to accept connections immediately and scale up when they become busy.

We recommend setting the minimum to a value that allows each DB writer or reader to hold the working set of the application in the buffer pool. That way, the contents of the buffer pool aren't discarded during idle periods. For all the considerations when choosing the minimum capacity value, see Choosing the minimum Aurora serverless capacity setting for a cluster. For all the considerations when choosing the maximum capacity value, see Choosing the maximum Aurora serverless capacity setting for a cluster.

Depending on how you configure the readers in a Multi-AZ deployment, their capacities can be tied to the capacity of the writer or independently. For details about how to do that, see Aurora serverless scaling.

Monitoring Aurora serverless involves measuring the capacity values for the writer and readers in your DB cluster over time. If your database doesn't scale down to the minimum capacity, you can take actions such as adjusting the minimum and optimizing your database application. If your

database consistently reaches its maximum capacity, you can take actions such as increasing the maximum. You can also optimize your database application and spread the query load across more readers.

The charges for Aurora serverless capacity are measured in terms of ACU-hours. For information about how Aurora serverless charges are calculated, see the Aurora pricing page.

Suppose that the total number of writers and readers in your cluster is *n*. In that case, the cluster consumes approximately *n* x *minimum ACUs* when you aren't running any database operations. Aurora itself might run monitoring or maintenance operations that cause some small amount of load. That cluster consumes no more than *n* x *maximum ACUs* when the database is running at full capacity.

For more details about choosing appropriate minimum and maximum ACU values, see Choosing the Aurora serverless capacity range for an Aurora cluster. The minimum and maximum ACU values that you specify also affect the way some of the Aurora configuration parameters work for Aurora serverless. For details about the interaction between the capacity range and configuration parameters, see Working with parameter groups for Aurora serverless.

Aurora serverless scaling

For each Aurora serverless writer or reader, Aurora continuously tracks utilization of resources such as CPU, memory, and network. These measurements collectively are called the *load*. The load includes the database operations performed by your application. It also includes background processing for the database server and Aurora administrative tasks. When capacity is constrained by any of these, Aurora serverless scales up. Aurora serverless also scales up when it detects performance issues that it can resolve by doing so. You can monitor resource utilization and how it affects Aurora serverless scaling by using the procedures in Important Amazon CloudWatch metrics for Aurora serverless and Monitoring Aurora serverless performance with Performance Insights.

The load can vary across the writer and readers in your DB cluster. The writer handles all data definition language (DDL) statements, such as `CREATE TABLE`, `ALTER TABLE`, and `DROP TABLE`. The writer also handles all data manipulation language (DML) statements, such as `INSERT` and `UPDATE`. Readers can process read-only statements, such as `SELECT` queries.

Scaling is the operation that increases or decreases Aurora serverless capacity for your database. With Aurora serverless, each writer and reader has its own current capacity value, measured in ACUs. Aurora serverless scales a writer or reader up to a higher capacity when its current capacity is

too low to handle the load. It scales the writer or reader down to a lower capacity when its current capacity is higher than needed.

Aurora serverless can increase capacity incrementally. When your workload demand begins to reach the current database capacity of a writer or reader, Aurora serverless increases the number of ACUs for that writer or reader. Aurora serverless scales capacity in the increments required to provide the best performance for the resources consumed. Scaling happens in increments as small as 0.5 ACUs. The larger the current capacity, the larger the scaling increment and thus the faster scaling can happen.

Because Aurora serverless scaling is so frequent, granular, and nondisruptive, it doesn't cause discrete events in the Amazon Web Services Management Console. Instead, you can measure the Amazon CloudWatch metrics such as `ServerlessDatabaseCapacity` and `ACUUtilization` and track their minimum, maximum, and average values over time. To learn more about Aurora metrics, see Monitoring metrics in an Amazon Aurora cluster. For tips about monitoring Aurora serverless, see Important Amazon CloudWatch metrics for Aurora serverless.

You can choose to make a reader follow the capacity of the associated writer, or scale independently from the writer. You do so by specifying the promotion tier for that reader.

- For readers in promotion tiers 0 and 1, the minimum capacity is defined by the current writer capacity and the maximum capacity is the maximum ACU value specified for the cluster. That scaling behavior makes readers in priority tiers 0 and 1 ideal for availability. That's because they are at least as large as the writer, so they can take over the workload from the writer in case of a failover. If the writer is a provisioned instance, the serverless reader's minimum capacity is the ACU equivalent of the writer's memory size.
- Readers in promotion tiers 2–15 scale independently from the writer. Each reader remains within the minimum and maximum ACU values that you specified for your cluster. When a reader scales independently of the associated writer DB, it can become idle and scale down while the writer continues to process a high volume of transactions. It's still available as a failover target, if no other readers are available in lower promotion tiers. However, if it's promoted to be the writer, it might need to scale up to handle the full workload of the writer.

For details about promotion tiers, see Choosing the promotion tier for an Aurora serverless reader.

Aurora serverless scaling can happen while database connections are open, while SQL transactions are in process, while tables are locked, and while temporary tables are in use. Aurora serverless

doesn't wait for a quiet point to begin scaling. Scaling doesn't disrupt any database operations that are underway.

If your workload requires more read capacity than is available with a single writer and a single reader, you can add multiple Aurora serverless readers to the cluster. Each Aurora serverless reader can scale within the range of minimum and maximum capacity values that you specified for your DB cluster. You can use the cluster's reader endpoint to direct read-only sessions to the readers and reduce the load on the writer.

Whether Aurora serverless performs scaling, and how fast scaling occurs once it starts, also depends on the minimum and maximum ACU settings for the cluster. In addition, it depends on whether a reader is configured to scale along with the writer or independently from it. For details about the factors that affect Aurora serverless scaling, see Performance and scaling for Aurora serverless.

Scaling to Zero

In recent Aurora MySQL and Aurora PostgreSQL versions, Aurora serverless writers and readers can scale all the way down to zero ACUs. We refer to this capability as automatic pause and resume, or auto-pause. You can choose whether to allow this behavior by specifying a zero or nonzero value for the minimum capacity. You can also choose how long to wait before an Aurora serverless instance pauses. For information about which versions have this capability, see Aurora serverless capacity. For information about how to use it effectively, see Scaling to Zero ACUs with automatic pause and resume for Aurora serverless.

In older Aurora MySQL and Aurora PostgreSQL versions, idle Aurora serverless writers and readers can scale down to the minimum ACU value that you specified for the cluster, but not all the way to zero ACUs. In that case, zero ACUs isn't available as a choice when you set the capacity range.

When your DB cluster with Aurora serverless capacity isn't needed for some time, you can also stop and start the entire cluster, the same as with provisioned DB clusters. This technique is most appropriate for development and test systems, where they might not be needed for many hours at a time, and the speed of resuming the cluster isn't crucial. The stop/start cluster feature is available for all Aurora serverless versions. For more information about that feature, see Stopping and starting an Amazon Aurora DB cluster.

Aurora serverless and high availability

The way to establish high availability for an Aurora DB cluster is to make it a Multi-AZ DB cluster. A *Multi-AZ Aurora DB cluster* has compute capacity available at all times in more than one Availability

Zone (AZ). That configuration keeps your database up and running even in case of a significant outage. Aurora performs an automatic failover in case of an issue that affects the writer or even the entire AZ. With Aurora serverless, you can choose for the standby compute capacity to scale up and down along with the capacity of the writer. That way, the compute capacity in the second AZ is ready to take over the current workload at any time. At the same time, the compute capacity in all AZs can scale down when the database is idle. For details about how Aurora works with Amazon Web Services Regions and Availability Zones, see High availability for Aurora DB instances.

The Aurora serverless Multi-AZ capability uses *readers* in addition to the writer. Support for readers is new for Aurora serverless. You can add up to 15 Aurora serverless readers spread across 3 AZs to an Aurora DB cluster.

For business-critical applications that must remain available even in case of an issue that affects your entire cluster or the whole Amazon Region, you can set up an Aurora global database. You can use Aurora serverless capacity in the secondary clusters so they're ready to take over during disaster recovery. They can also scale down when the database isn't busy. For details about Aurora global databases, see Using Amazon Aurora Global Database.

Aurora serverless works like provisioned for failover and other high availability features. For more information, see High availability for Amazon Aurora.

Suppose that you want to ensure maximum availability for your Aurora serverless cluster. You can create a reader in addition to the writer. If you assign the reader to promotion tier 0 or 1, the reader's minimum capacity will match the current writer capacity (or writer's memory size, for provisioned writers). That way, a reader is always ready to take over for the writer in case of a failover.

Suppose that you want to run quarterly reports for your business at the same time as your cluster continues to process transactions. If you add an Aurora serverless reader to the cluster and assign it to a promotion tier from 2 through 15, you can connect directly to that reader to run the reports. Depending on how memory-intensive and CPU-intensive the reporting queries are, that reader can scale up to accommodate the workload. It can then scale down again when the reports are finished.

Aurora serverless and storage

The storage for each Aurora DB cluster consists of six copies of all your data, spread across three AZs. This built-in data replication applies regardless of whether your DB cluster includes any readers in addition to the writer. That way, your data is safe, even from issues that affect the compute capacity of the cluster.

Aurora serverless storage has the same reliability and durability characteristics as described in Amazon Aurora storage. That's because the storage for Aurora DB clusters works the same whether the compute capacity uses Aurora serverless or provisioned.

Configuration parameters for Aurora clusters

You can adjust all the same cluster and database configuration parameters for clusters with Aurora serverless capacity as for provisioned DB clusters. However, some capacity-related parameters are handled differently for Aurora serverless. In a mixed-configuration cluster, the parameter values that you specify for those capacity-related parameters still apply to any provisioned writers and readers.

Almost all of the parameters work the same way for Aurora serverless writers and readers as for provisioned ones. The exceptions are some parameters that Aurora automatically adjusts during scaling, and some parameters that Aurora keeps at fixed values that depend on the maximum capacity setting.

For example, the amount of memory reserved for the buffer cache increases as a writer or reader scales up, and decreases as it scales down. That way, memory can be released when your database isn't busy. Conversely, Aurora automatically sets the maximum number of connections to a value that's appropriate based on the maximum capacity setting. That way, active connections aren't dropped if the load drops and Aurora serverless scales down. For information about how Aurora serverless handles specific parameters, see Working with parameter groups for Aurora serverless.

Requirements and limitations for Aurora serverless

When you create a cluster where you intend to use Aurora serverless DB instances, pay attention to the following requirements and limitations.

Topics

- Region and version availability
- Clusters that use Aurora serverless must have a capacity range specified
- Incompatible scaling configuration
- Some provisioned features aren't supported in Aurora serverless

Region and version availability

Feature availability and support varies across specific versions of each Aurora database engine, and across Amazon Web Services Regions. For more information on version and Region availability with Aurora and Aurora serverless, see Supported Regions and Aurora DB engines for Aurora serverless.

The following example shows the Amazon CLI commands to confirm the exact DB engine values you can use with Aurora serverless for a specific Amazon Web Services Region. The `--db-instance-class` parameter for Aurora serverless is always `db.serverless`. The `--engine` parameter can be `aurora-mysql` or `aurora-postgresql`. Substitute the appropriate `--region` and `--engine` values to confirm the `--engine-version` values that you can use. If the command doesn't produce any output, Aurora serverless isn't available for that combination of Amazon Web Services Region and DB engine.

```
aws rds describe-orderable-db-instance-options --engine aurora-mysql --db-instance-
class db.serverless \
  --region my_region --query 'OrderableDBInstanceOptions[].[EngineVersion]' --output
 text

aws rds describe-orderable-db-instance-options --engine aurora-postgresql --db-
instance-class db.serverless \
  --region my_region --query 'OrderableDBInstanceOptions[].[EngineVersion]' --output
 text
```

Clusters that use Aurora serverless must have a capacity range specified

An Aurora cluster must have a `ServerlessV2ScalingConfiguration` attribute before you can add any DB instances that use the `db.serverless` DB instance class. This attribute specifies the capacity range. Aurora serverless capacity ranges from a minimum of 0 Aurora capacity units (ACU) to a maximum of 256 ACUs for Aurora MySQL and to 384 ACUs for Aurora PostgreSQL, in increments of 0.5 ACU. The allowed minimum value depends on the Aurora version. Each ACU provides the equivalent of approximately 2 gibibytes (GiB) of RAM and associated CPU and networking. For details about how Aurora serverless uses the capacity range settings, see How Aurora serverless works.

For the allowed capacity ranges for various DB engine versions and platform versions, see Aurora serverless capacity. The available scaling range for a given cluster is influenced by both engine version and hardware (platform version).

You can specify the minimum and maximum ACU values in the Amazon Web Services Management Console when you create a cluster and associated Aurora serverless DB instance. You can also specify the `--serverless-v2-scaling-configuration` option in the Amazon CLI. Or you can specify the `ServerlessV2ScalingConfiguration` parameter with the Amazon RDS API. You can specify this attribute when you create a cluster or modify an existing cluster. For the procedures to set the capacity range, see Setting the Aurora serverless capacity range for a cluster. For a detailed discussion of how to pick minimum and maximum capacity values and how those settings affect some database parameters, see Choosing the Aurora serverless capacity range for an Aurora cluster.

Incompatible scaling configuration

When you modify your Aurora PostgreSQL cluster with a lower maximum capacity, each instance will be scaled down to match the new configuration. If Aurora detects that any of your instances are having trouble scaling down, it may cancel and roll back the scaling configuration update. As a result, the instances will scale back up to their previous configuration. This issue may occur if the new maximum capacity is insufficient to handle the current workload or if the custom parameters applied to the cluster's or instances' database parameter group are set too high.

When the rollback starts, you will be notified via an Amazon RDS event containing information about instances that could not apply your desired scaling configuration. After the rollback completes, the scaling configuration's maximum capacity will return to its original higher value. Due to the roll back, you may observe that the Aurora Serverless database capacity across all of your cluster's instances may also increase, leading to higher costs.

For example, you have an Aurora PostgreSQL Aurora Serverless cluster with a single instance and the scaling configuration is set to `minCapacity=0.5`, `maxCapacity=128`, and `secondsUntilAutopause=null`. In addition, the database parameter `track_activity_query_size` is set to a custom value of 40960. If you then modify the cluster's scaling configuration to have a maximum capacity of 1 ACU, you may notice that after a couple of hours, the modification has not completed. The high value of the `track_activity_query_size` parameter requires more resources than the new maximum capacity can provide. As a result, even with no workload, the instance's `ServerlessDatabaseCapacity` cannot scale down to match the new maximum capacity of 1 ACU. Aurora serverless will then cancel the scaling configuration modification and will reapply the previous scaling configuration of `minCapacity=0.5`, `maxCapacity=128`, `secondsUntilAutopause=null`. The instance will then scale up to match the previous scaling configuration, ending the cluster's modification. An Amazon RDS event is

published notifying you that an incompatible scaling configuration update was detected, canceled, and rolled back to the previous configuration.

Issues and Remediations

New scaling configuration is incompatible with workload

The new Aurora serverless scaling configuration's maximum capacity is too low to handle the current workload.

Recommendations:

- Reduce your workload before reapplying the lower maximum capacity.
- If reducing the workload is not an option, reevaluate the desired maximum capacity. To pick an appropriate maximum capacity, check the maximum `ServerlessDatabaseCapacity` CloudWatch metric for your Aurora PostgreSQL cluster before the scaling configuration update was cancelled and rolled back. Then set your new scaling configuration's maximum capacity to be at least the observed ServerlessDatabaseCapacity value. For more guidance on choosing a maximum capacity, see Choosing the Aurora serverless capacity range for an Aurora cluster.

New scaling configuration is incompatible with custom database parameters

Your cluster's or instances' custom database parameter groups require additional resources that exceed the new scaling configuration's maximum capacity.

Potential incompatible Aurora PostgreSQL database parameters:

- max_connections
- track_activity_query_size
- min_dynamic_shared_memory

Recommendations:

- To pick an appropriate database parameter value, check the default parameter values for each of the parameters listed above. If your configured value exceeds the default values, reduce the parameters to their default values before modifying the scaling configuration with the same reduced maximum capacity.
- If reducing the database parameters is not an option, follow the same steps to pick an appropriate maximum capacity outlined above in: New scaling configuration is incompatible with workload.

Some provisioned features aren't supported in Aurora serverless

The following features from Aurora provisioned DB instances currently aren't available for Amazon Aurora serverless:

- Database activity streams (DAS).
- Cluster cache management for Aurora PostgreSQL. The `apg_ccm_enabled` configuration parameter doesn't apply to Aurora serverless DB instances.

Some Aurora features work with Aurora serverless, but might cause issues if your capacity range is lower than needed for the memory requirements for those features with your specific workload. In that case, your database might not perform as well as usual, or might encounter out-of-memory errors. For recommendations about setting the appropriate capacity range, see Choosing the Aurora serverless capacity range for an Aurora cluster. For troubleshooting information if your database encounters out-of-memory errors due to a misconfigured capacity range, see Avoiding out-of-memory errors and CPU saturation.

Aurora Auto Scaling isn't supported. This type of scaling adds new readers to handle additional read-intensive workload, based on CPU usage. However, scaling based on CPU usage isn't meaningful for Aurora serverless. As an alternative, you can create Aurora serverless reader DB instances in advance and leave them scaled down to low capacity. That's a faster and less disruptive way to scale a cluster's read capacity than adding new DB instances dynamically.

Creating a DB cluster that uses Aurora serverless

To create an Aurora cluster where you can add Aurora serverless DB instances, you follow the same procedure as in Creating an Amazon Aurora DB cluster. With Aurora serverless, your clusters are interchangeable with provisioned clusters. You can have clusters where some DB instances use Aurora serverless and some DB instances are provisioned.

Topics

- Settings for Aurora serverless DB clusters
- Creating an Aurora serverless DB cluster
- Creating an Aurora serverless writer DB instance

Settings for Aurora serverless DB clusters

Make sure that the cluster's initial settings meet the requirements listed in Requirements and limitations for Aurora serverless. Specify the following settings to make sure that you can add Aurora serverless DB instances to the cluster:

Amazon Web Services Region

Create the cluster in an Amazon Web Services Region where Aurora serverless DB instances are available. For details about available Regions, see Supported Regions and Aurora DB engines for Aurora serverless.

DB engine version

Choose an engine version that's compatible with Aurora serverless. For information about the Aurora serverless version requirements, see Requirements and limitations for Aurora serverless.

DB instance class

If you create a cluster using the Amazon Web Services Management Console, you choose the DB instance class for the writer DB instance at the same time. Choose the **Serverless** DB instance class. When you choose that DB instance class, you also specify the capacity range for the writer DB instance. That same capacity range applies to all other Aurora serverless DB instances that you add to that cluster.

If you don't see the **Serverless** choice for the DB instance class, make sure that you chose a DB engine version that's supported for Supported Regions and Aurora DB engines for Aurora serverless.

When you use the Amazon CLI or the Amazon RDS API, the parameter that you specify for the DB instance class is `db.serverless`.

Capacity range

Fill in the minimum and maximum Aurora capacity unit (ACU) values that apply to all the DB instances in the cluster. This option is available on both the **Create cluster** and **Add reader** console pages when you choose **Serverless** for the DB instance class.

For the allowed capacity ranges for various DB engine versions, see Aurora serverless capacity.

If you don't see the minimum and maximum ACU fields, make sure that you chose the **Serverless** DB instance class for the writer DB instance.

If you initially create the cluster with a provisioned DB instance, you don't specify the minimum and maximum ACUs. In that case you can modify the cluster afterward to add that setting. You can also add an Aurora serverless reader DB instance to the cluster. You specify the capacity range as part of that process.

Until you specify the capacity range for your cluster, you can't add any Aurora serverless DB instances to the cluster using the Amazon CLI or RDS API. If you try to add a Aurora serverless DB instance, you get an error. In the Amazon CLI or the RDS API procedures, the capacity range is represented by the `ServerlessV2ScalingConfiguration` attribute.

For clusters containing more than one reader DB instance, the failover priority of each Aurora serverless reader DB instance plays an important part in how that DB instance scales up and down. You can't specify the priority when you initially create the cluster. Keep this property in mind when you add a second or later reader DB instance to your cluster. For more information, see Choosing the promotion tier for an Aurora serverless reader.

Creating an Aurora serverless DB cluster

You can use the Amazon Web Services Management Console, Amazon CLI, or RDS API to create an Aurora serverless DB cluster.


Console

To create a cluster with an Aurora serverless writer


1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose **Create database**. On the page that appears, choose the following options:
   - For **Engine type**, choose **Aurora (MySQL Compatible)** or **Aurora (PostgreSQL Compatible)**.
   - For **Version**, choose one of the supported versions for Supported Regions and Aurora DB engines for Aurora serverless.
4. For **DB instance class**, select **Serverless v2**.
5. For **Capacity range**, you can accept the default range. Or you can choose other values for minimum and maximum capacity units. You can choose from 0 ACUs through 256 ACUs for Aurora MySQL and to 384 ACUs for Aurora PostgreSQL, in increments of 0.5 ACU.

For more information about Aurora serverless capacity units, see Aurora serverless capacity and Performance and scaling for Aurora serverless.

Depending on the engine and version that you choose, the upper limit might be 128 ACUs, the lower limit might be 0.5 ACUs, or both. For details about the limit for each combination of Aurora engine and version, see Aurora serverless capacity.

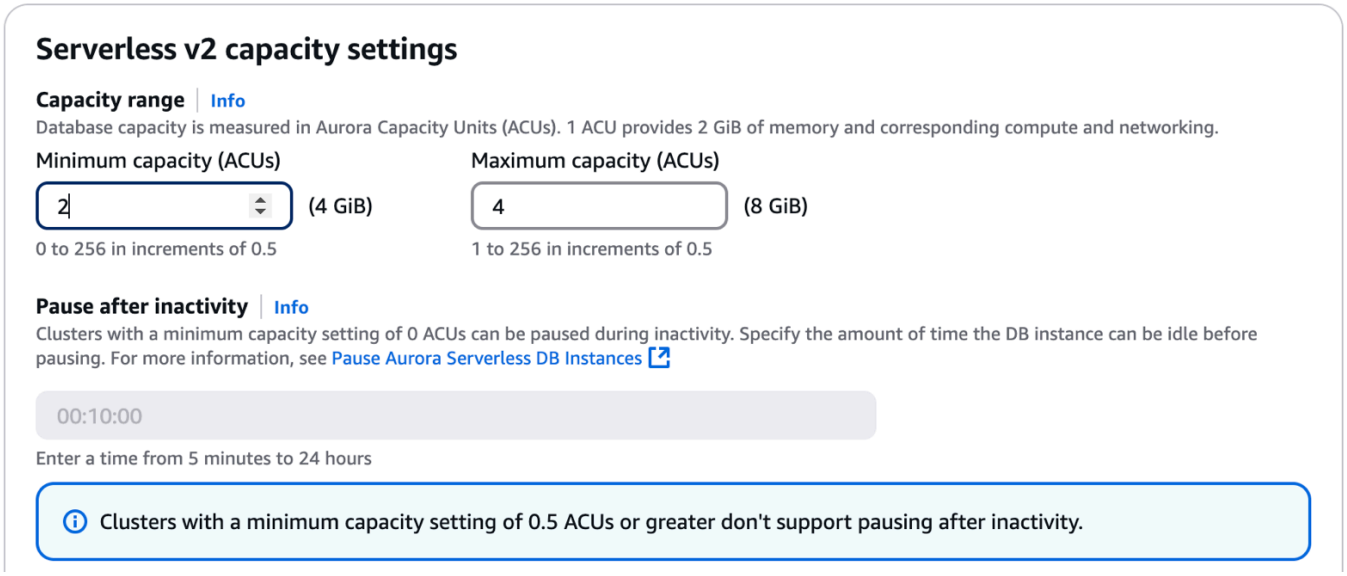

Choosing a minimum capacity of 0 ACUs enables the Aurora serverless automatic pause and resume capability. In that case, you can make an additional choice of how long the Aurora serverless DB instances wait with no database connections before automatically pausing. For information about the automatic pause and resume capability, see Scaling to Zero ACUs with automatic pause and resume for Aurora serverless.

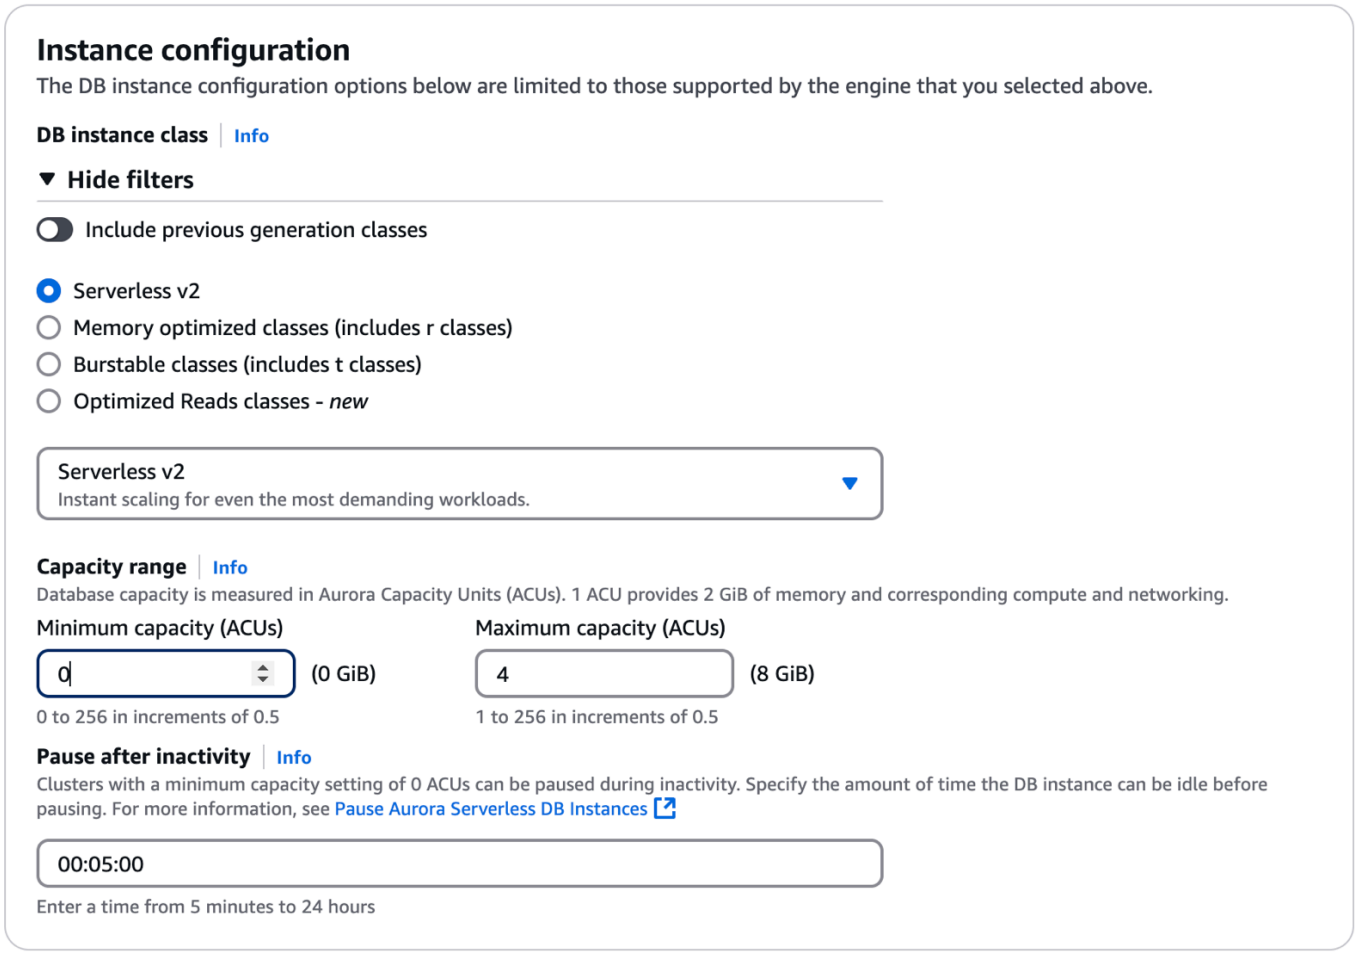

6. Choose any other DB cluster settings, as described in Settings for Aurora DB clusters.
7. Choose **Create database** to create your Aurora DB cluster with an Aurora serverless DB instance as the writer instance, also known as the primary DB instance.

CLI

To create a DB cluster that's compatible with Aurora serverless DB instances using the Amazon CLI, you follow the CLI procedure in Creating an Amazon Aurora DB cluster. Include the following parameters in your `create-db-cluster` command:

- --region *AWS_Region_where_Aurora serverless_instances_are_available*
- --engine-version *serverless_v2_compatible_engine_version*
- --serverless-v2-scaling-configuration MinCapacity=*minimum_capacity*,MaxCapacity=*maximum_capacity*

The following example shows the creation of an Aurora serverless DB cluster.

```
aws rds create-db-cluster \
    --db-cluster-identifier my-serverless-v2-cluster \
    --region eu-central-1 \
    --engine aurora-mysql \
    --engine-version 8.0.mysql_aurora.3.04.1 \
    --serverless-v2-scaling-configuration MinCapacity=1,MaxCapacity=4 \
    --master-username myuser \
    --manage-master-user-password
```

Note

When you create an Aurora serverless DB cluster using the Amazon CLI, the engine mode appears in the output as `provisioned` rather than `serverless`.

This example specifies the `--manage-master-user-password` option to generate the administrative password and manage it in Secrets Manager. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager. Alternatively, you can use the `--master-password` option to specify and manage the password yourself.

For information about the Aurora serverless version requirements, see Requirements and limitations for Aurora serverless. For information about the allowed numbers for the capacity range and what those numbers represent, see Aurora serverless capacity and Performance and scaling for Aurora serverless.

To verify whether an existing cluster has the capacity settings specified, check the output of the `describe-db-clusters` command for the `ServerlessV2ScalingConfiguration` attribute. That attribute looks similar to the following.

```
"ServerlessV2ScalingConfiguration": {
    "MinCapacity": 1.5,
    "MaxCapacity": 24.0
}
```

Tip

If you don't specify the minimum and maximum ACUs when you create the cluster, you can use the `modify-db-cluster` command afterward to add that setting. Until you

do, you can't add any Aurora serverless DB instances to the cluster. If you try to add a `db.serverless` DB instance, you get an error.

API

To create a DB cluster that's compatible with Aurora serverless DB instances using the RDS API, you follow the API procedure in Creating an Amazon Aurora DB cluster. Choose the following settings. Make sure that your `CreateDBCluster` operation includes the following parameters:

```
EngineVersion serverless_v2_compatible_engine_version
ServerlessV2ScalingConfiguration with MinCapacity=minimum_capacity and
 MaxCapacity=maximum_capacity
```

For information about the Aurora serverless version requirements, see Requirements and limitations for Aurora serverless. For information about the allowed numbers for the capacity range and what those numbers represent, see Aurora serverless capacity and Performance and scaling for Aurora serverless.

To check if an existing cluster has the capacity settings specified, check the output of the `DescribeDBClusters` operation for the `ServerlessV2ScalingConfiguration` attribute. That attribute looks similar to the following.

```
"ServerlessV2ScalingConfiguration": {
    "MinCapacity": 1.5,
    "MaxCapacity": 24.0
}
```

Tip

If you don't specify the minimum and maximum ACUs when you create the cluster, you can use the `ModifyDBCluster` operation afterward to add that setting. Until you do, you can't add any Aurora serverless DB instances to the cluster. If you try to add a `db.serverless` DB instance, you get an error.

Creating an Aurora serverless writer DB instance

Although you specify the Aurora serverless capacity range when you create an Aurora cluster, you can choose whether to use Aurora serverless or provisioned for each DB instance in the cluster. To begin using Aurora serverless immediately in your DB cluster, add a writer DB instance that uses the db.serverless instance class. In the console, you typically make this choice as part of the workflow to create the DB cluster. Therefore, this procedure applies mostly when you do the setup through the CLI.

Console

When you create a DB cluster using the Amazon Web Services Management Console, you specify the properties of the writer DB instance at the same time. To make the writer DB instance use Aurora serverless, choose the **Serverless** DB instance class.

Then you set the capacity range for the cluster by specifying the minimum and maximum Aurora capacity unit (ACU) values. These minimum and maximum values apply to each Aurora serverless DB instance in the cluster. For that procedure and the significance of the minimum and maximum capacity settings, see Creating an Aurora serverless DB cluster.

If you don't create an Aurora serverless DB instance when you first create the cluster, you can add one or more Aurora serverless DB instances later. To do so, follow the procedures in Adding an Aurora serverless reader and Converting a provisioned writer or reader to Aurora serverless. You specify the capacity range at the time that you add the first Aurora serverless DB instance to the cluster. You can change the capacity range later by following the procedure in Setting the Aurora serverless capacity range for a cluster.

CLI

When you create a Aurora serverless DB cluster using the Amazon CLI, you explicitly add the writer DB instance using the create-db-instance command. Include the following parameter:

- `--db-instance-class db.serverless`

The following example shows the creation of an Aurora serverless writer DB instance.

```
aws rds create-db-instance \
    --db-cluster-identifier my-serverless-v2-cluster \
    --db-instance-identifier my-serverless-v2-instance \
```

```
    --db-instance-class db.serverless \
    --engine aurora-mysql
```

Managing Aurora serverless DB clusters

With Aurora serverless, your clusters are interchangeable with provisioned clusters. The Aurora serverless properties apply to one or more DB instances within a DB cluster. Thus, the procedures for creating clusters, modifying clusters, creating and restoring snapshots, and so on, are basically the same as for other kinds of Aurora clusters. For general procedures for managing Aurora clusters and DB instances, see Managing an Amazon Aurora DB cluster.

In the following topics, you can learn about management considerations for clusters that contain Aurora serverless DB instances.

Topics

- Setting the Aurora serverless capacity range for a cluster
- Checking the capacity range for Aurora serverless
- Checking the platform version for an existing Aurora serverless cluster
- Adding an Aurora serverless reader
- Converting a provisioned writer or reader to Aurora serverless
- Converting an Aurora serverless writer or reader to provisioned
- Pausing Aurora serverless DB instances
- Choosing the promotion tier for an Aurora serverless reader
- Using TLS/SSL with Aurora serverless
- Viewing Aurora serverless writers and readers
- Logging for Aurora serverless

Setting the Aurora serverless capacity range for a cluster

To modify configuration parameters or other settings for clusters containing Aurora serverless DB instances, or the DB instances themselves, follow the same general procedures as for provisioned clusters. For details, see Modifying an Amazon Aurora DB cluster.

The most important setting that's unique to Aurora serverless is the capacity range. After you set the minimum and maximum Aurora capacity unit (ACU) values for an Aurora cluster, you don't need

to actively adjust the capacity of the Aurora serverless DB instances in the cluster. Aurora does that for you. This setting is managed at the cluster level. The same minimum and maximum ACU values apply to each Aurora serverless DB instance in the cluster.

You can set the following specific values:

- **Minimum ACUs** – The Aurora serverless DB instance can reduce capacity down to this number of ACUs.
- **Maximum ACUs** – The Aurora serverless DB instance can increase capacity up to this number of ACUs.

The available capacity range for Aurora serverless is a function of both the DB engine version and the platform version. Newer DB engine versions allow a maximum capacity of 256 ACUs for Aurora MySQL and to 384 ACUs for Aurora PostgreSQL, a minimum capacity of 0 ACUs, or both. For the capacity ranges for various DB engine versions, see Aurora serverless capacity.

For the auto-pause and resume capability that's enabled by setting the minimum capacity to 0 ACUs, see Scaling to Zero ACUs with automatic pause and resume for Aurora serverless.

For more information on making sure that your Aurora serverless DB clusters can scale up to 256 ACUs for Aurora MySQL and to 384 ACUs for Aurora PostgreSQL, see Upgrading your Aurora serverless DB cluster to allow scaling to maximum ACUs.

> **Note**
>
> When you modify the capacity range for an Aurora serverless DB cluster, the change takes place immediately, regardless of whether you choose to apply it immediately or during the next scheduled maintenance window.

In Aurora serverless, you can't directly set the current capacity without modifying the capacity range, as capacity dynamically adjusts based on the workload within the specified range. However, you can influence the capacity indirectly in the following ways:

- **Adjust the minimum capacity** – Temporarily lower the minimum capacity to reduce the baseline capacity when workloads are light.
- **Pause scaling temporarily** – To fix the capacity at a specific value, set the minimum and maximum capacity to the same level.

- **Scale proactive for bursting usage** – If you anticipate bursting workloads, increase the minimum capacity beforehand to maintain a higher baseline during periods of high activity.

For details about the effects of the capacity range and how to monitor and fine-tune it, see Important Amazon CloudWatch metrics for Aurora serverless and Performance and scaling for Aurora serverless. Your goal is to make sure that the maximum capacity for the cluster is high enough to handle spikes in workload, and the minimum is low enough to minimize costs when the cluster isn't busy.

Suppose that you determine based on your monitoring that the ACU range for the cluster should be higher, lower, wider, or narrower. You can set the capacity of an Aurora cluster to a specific range of ACUs with the Amazon Web Services Management Console, the Amazon CLI, or the Amazon RDS API. This capacity range applies to every Aurora serverless DB instance in the cluster.

For example, suppose that your cluster has a capacity range of 1–16 ACUs and contains two Aurora serverless DB instances. Then the cluster as a whole consumes somewhere between 2 ACUs (when idle) and 32 ACUs (when fully utilized). If you change the capacity range from 8 to 40.5 ACUs, now the entire cluster consumes 16 ACUs when idle, and up to 81 ACUs when fully utilized.

Aurora automatically sets certain parameters for Aurora serverless DB instances to values that depend on the maximum ACU value in the capacity range. For the list of such parameters, see Maximum connections for Aurora serverless. For static parameters that rely on this type of calculation, the value is evaluated again when you reboot the DB instance. Thus, you can update the value of such parameters by rebooting the DB instance after changing the capacity range. To check whether you need to reboot your DB instance to pick up such parameter changes, check the `ParameterApplyStatus` attribute of the DB instance. A value of `pending-reboot` indicates that rebooting will apply changes to some parameter values.


Console

You can set the capacity range of a cluster that contains Aurora serverless DB instances with the Amazon Web Services Management Console.

When you use the console, you set the capacity range for the cluster at the time that you add the first Aurora serverless DB instance to that cluster. You might do so when you choose the **Serverless v2** DB instance class for the writer DB instance when you create the cluster. Or you might do so when you choose the **Serverless** DB instance class when you add an Aurora serverless reader DB instance to the cluster. Or you might do so when you convert an existing provisioned DB

instance in the cluster to the **Serverless** DB instance class. For the full versions of those procedures, see Creating an Aurora serverless writer DB instance, Adding an Aurora serverless reader, and Converting a provisioned writer or reader to Aurora serverless.

Whatever capacity range that you set at the cluster level applies to all Aurora serverless DB instances in your cluster. The following image shows a cluster with multiple Aurora serverless reader DB instances. Each has an identical capacity range of 2–64 ACUs.

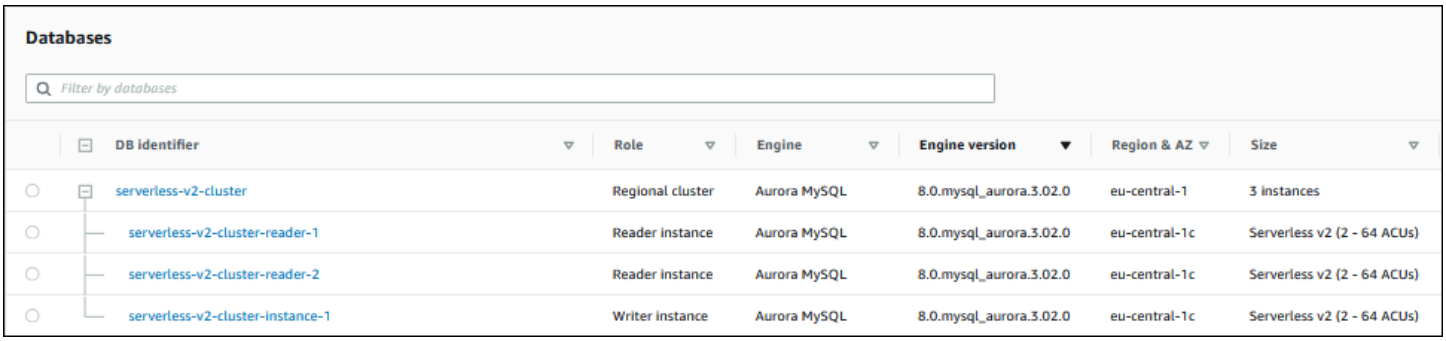


To modify the capacity range of an Aurora serverless cluster

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the cluster containing your Aurora serverless DB instances from the list. The cluster must already contain at least one Aurora serverless DB instance. Otherwise, Aurora doesn't show the **Capacity range** section.
4. For **Actions**, choose **Modify**.
5. In the **Capacity range** section, choose the following:

    a. Enter a value for **Minimum ACUs**. The console shows the allowed range of values. You can choose a minimum capacity from 0 to 384 ACUs. You can choose a maximum capacity from 1 to 384 ACUs. You can adjust the capacity values in increments of 0.5 ACU. The available capacity range depends on both your DB engine version and the platform version.

    b. Enter a value for **Maximum ACUs**. This value must be greater than or equal to **Minimum ACUs**. The console shows the allowed range of values. The following figure shows that choice.

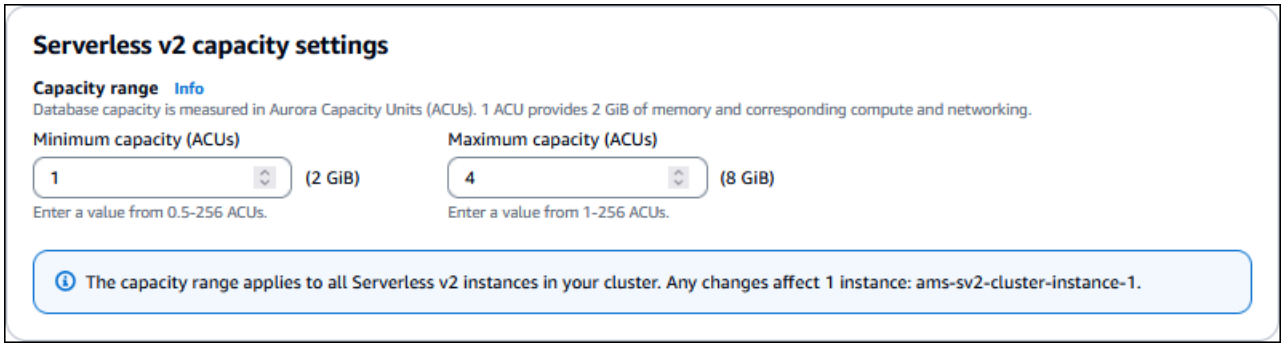

6. Choose **Continue**. The **Summary of modifications** page appears.
7. Choose **Apply immediately**.

   The capacity modification takes place immediately, regardless of whether you choose to apply it immediately or during the next scheduled maintenance window.
8. Choose **Modify cluster** to accept the summary of modifications. You can also choose **Back** to modify your changes or **Cancel** to discard your changes.

Amazon CLI

To set the capacity of a cluster where you intend to use Aurora serverless DB instances using the Amazon CLI, run the modify-db-cluster Amazon CLI command. Specify the `--serverless-v2-scaling-configuration` option. The cluster might already contain one or more Aurora serverless DB instances, or you can add the DB instances later. Valid values for the `MinCapacity` and `MaxCapacity` fields include the following:

- `0`, `0.5`, 1, `1.5`, 2, and so on, in steps of 0.5, up to a maximum of 256 for Aurora MySQL and to 384 ACUs for Aurora PostgreSQL. The minimum ACU value of 0 is only available for the Aurora versions that support the auto-pause feature.

The maximum available capacity depends on both your DB engine version and the platform version.

In this example, you set the ACU range of an Aurora DB cluster named `sample-cluster` to a minimum of `48.5` and a maximum of 64.

```
aws rds modify-db-cluster --db-cluster-identifier sample-cluster \
  --serverless-v2-scaling-configuration MinCapacity=48.5,MaxCapacity=64
```

The capacity modification takes place immediately, regardless of whether you choose to apply it immediately or during the next scheduled maintenance window.

After doing so, you can add Aurora serverless DB instances to the cluster and each new DB instance can scale between 48.5 and 64 ACUs. The new capacity range also applies to any Aurora serverless DB instances that were already in the cluster. The DB instances scale up or down if necessary to fall within the new capacity range.

For additional examples of setting the capacity range using the CLI, see Choosing the Aurora serverless capacity range for an Aurora cluster.

To modify the scaling configuration of an Aurora Serverless DB cluster using the Amazon CLI, run the modify-db-cluster Amazon CLI command. Specify the `--serverless-v2-scaling-configuration` option to configure the minimum capacity and maximum capacity. Valid capacity values include the following:

- Aurora MySQL: `0`, `0.5`, 1, `1.5`, 2, and so on, in increments of 0.5 ACUs up to a maximum of 256.
- Aurora PostgreSQL: `0`, `0.5`, 1, `1.5`, 2, and so on, in increments of 0.5 ACUs up to a maximum of 384.
- The minimum ACU value of 0 is only available for the Aurora versions that support the auto-pause feature.

In the following example, you modify the scaling configuration of an Aurora serverless DB instance named `sample-instance` that's part of a cluster named `sample-cluster`.

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster --db-cluster-identifier sample-cluster \
--serverless-v2-scaling-configuration MinCapacity=8,MaxCapacity=64
```

For Windows:

```
aws rds modify-db-cluster --db-cluster-identifier sample-cluster ^
--serverless-v2-scaling-configuration MinCapacity=8,MaxCapacity=64
```

RDS API

You can set the capacity of an Aurora DB instance with the ModifyDBCluster API operation. Specify the `ServerlessV2ScalingConfiguration` parameter. Valid values for the `MinCapacity` and `MaxCapacity` fields include the following:

- `0`, `0.5`, 1, `1.5`, 2, and so on, in steps of 0.5, up to a maximum of 256 for Aurora MySQL and to 384 ACUs for Aurora PostgreSQL. The minimum ACU value of 0 is only available for the Aurora versions that support the auto-pause feature.

You can modify the scaling configuration of a cluster containing Aurora serverless DB instances with the ModifyDBCluster API operation. Specify the `ServerlessV2ScalingConfiguration` parameter to configure the minimum capacity and the maximum capacity. Valid capacity values include the following:

- Aurora MySQL: `0`, `0.5`, 1, `1.5`, 2, and so on, in increments of 0.5 ACUs up to a maximum of 256.
- Aurora PostgreSQL: `0`, `0.5`, 1, `1.5`, 2, and so on, in increments of 0.5 ACUs up to a maximum of 384.
- The minimum ACU value of 0 is only available for the Aurora versions that support the auto-pause feature.

The maximum available capacity depends on both your DB engine version and the platform version.

The capacity modification takes place immediately, regardless of whether you choose to apply it immediately or during the next scheduled maintenance window.

Upgrading your Aurora serverless DB cluster to allow scaling to maximum ACUs

In some cases, when you try to scale your Aurora serverless DB cluster to capacities greater than 128 ACUs, you receive an error message. The error message tells you which instances are incompatible with the new scaling range. This highlights the important relationship between your capacity range, DB engine version, and platform version.

The inability to scale greater than 128 ACUs can happen for one of two reasons:

- Older DB engine version – Upgrade the DB engine version to one that supports 256 ACUs for Aurora MySQL and to 384 ACUs for Aurora PostgreSQL. For more information, see Aurora serverless capacity.
- Older platform version – Upgrade the platform for your Aurora serverless DB cluster. You can do this in one of the following ways:
  - Stop and restart the DB cluster. When the cluster restarts, it will be on the latest platform version capable which may be capable of a higher ACU maximum.

    However, stopping and starting a DB cluster incurs some downtime, usually several minutes. For more information, see Stopping and starting an Amazon Aurora DB cluster.
  - Use a blue/green deployment. For more information, see Overview of Amazon Aurora Blue/Green Deployments.
    1. Create a blue/green deployment. For more information, see Creating a blue/green deployment in Amazon Aurora.
    2. Confirm that you can set the maximum capacity for the staging (green) environment to 256 ACUs for Aurora MySQL and to 384 ACUs for Aurora PostgreSQL.
    3. Switch over to the green environment. For more information, see Switching a blue/green deployment in Amazon Aurora.
    4. Delete the original DB cluster.


    Note

    - If you maintain your database credentials in Amazon Secrets Manager, you can't use blue/green deployments.
    - Aurora Global Database doesn't support blue/green deployments.
    - **Important:** Once you upgrade to a newer platform version, you cannot downgrade to a previous version.


Checking the capacity range for Aurora serverless

The procedure to check the capacity range for your Aurora serverless cluster requires that you first set a capacity range. If you haven't done so, follow the procedure in Setting the Aurora serverless capacity range for a cluster.

Whatever capacity range you set at the cluster level applies to all Aurora serverless DB instances in your cluster. The following image shows a cluster with multiple Aurora serverless DB instances. Each has an identical capacity range.

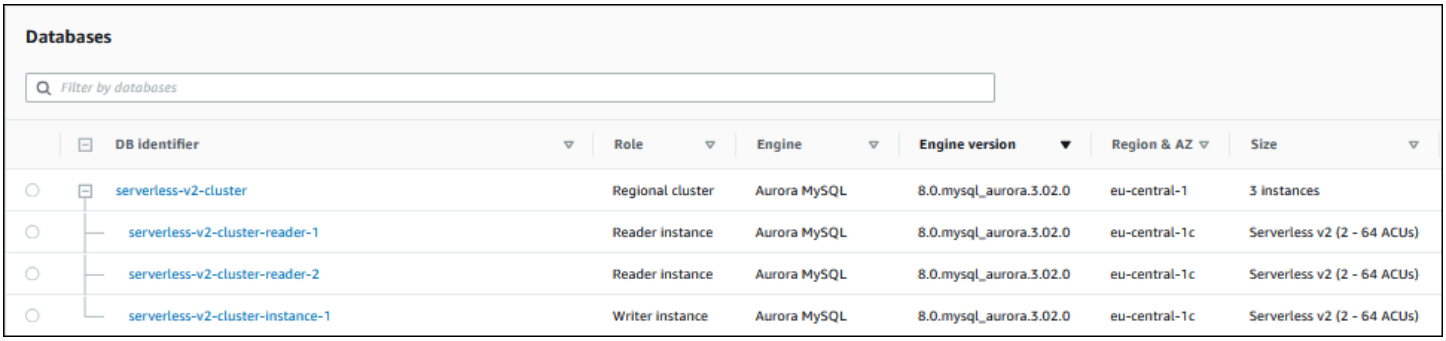

You can also view the details page for any Aurora serverless DB instance in the cluster. DB instances' capacity range appears on the **Configuration** tab.

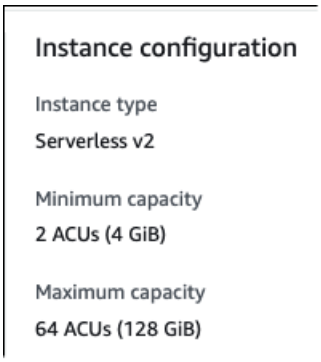

You can also see the current capacity range for the cluster on the **Modify** page for the cluster. At that point, you can change the capacity range. For all the ways that you can set or change the capacity range, see Setting the Aurora serverless capacity range for a cluster.

Checking the current capacity range for an Aurora cluster

You can check the capacity range that's configured for Aurora serverless DB instances in a cluster by examining the `ServerlessV2ScalingConfiguration` attribute for the cluster. The following Amazon CLI example shows a cluster with a minimum capacity of 0.5 Aurora capacity units (ACUs) and a maximum capacity of 16 ACUs.


```
$ aws rds describe-db-clusters --db-cluster-identifier serverless-v2-64-acu-cluster \
  --query 'DBClusters[*].[ServerlessV2ScalingConfiguration]'
[
    [
        {
```

```
            "MinCapacity": 0.5,
            "MaxCapacity": 16.0
        }
    ]
]
```

Checking the platform version for an existing Aurora serverless cluster

Console

The platform version is displayed in the Instance Configuration section of the instance.

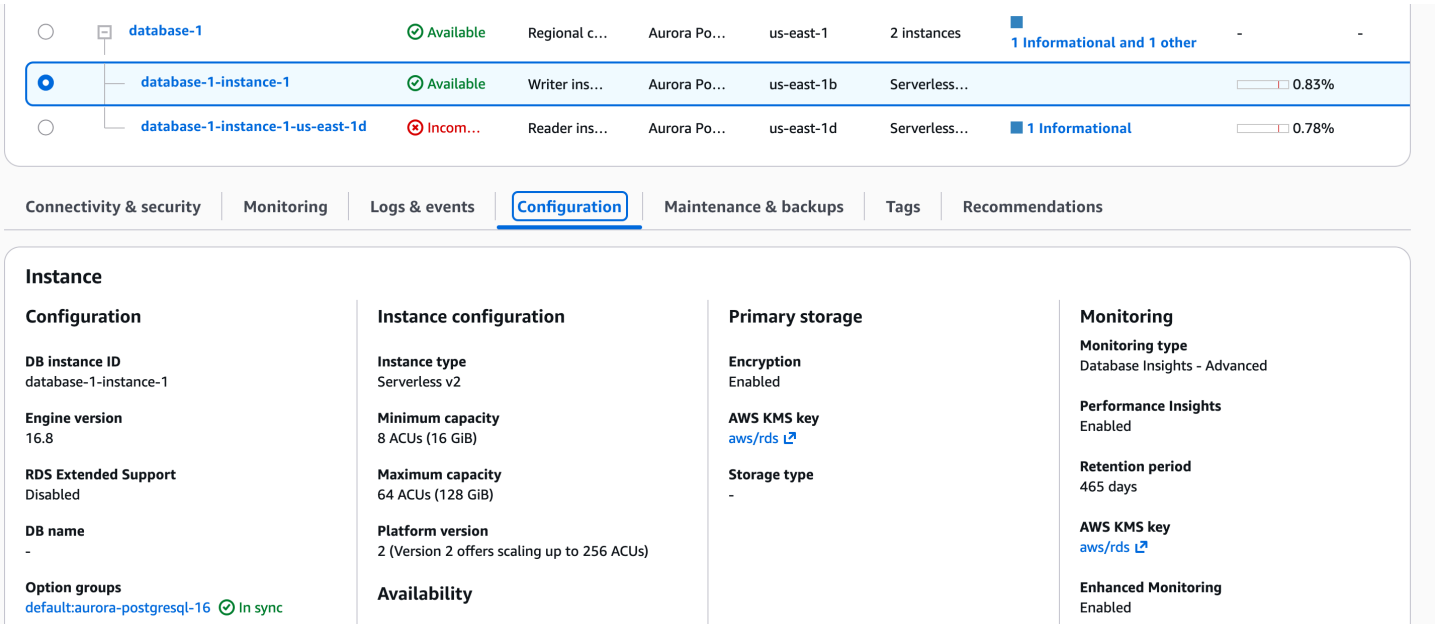

Amazon CLI

You can use the `describe-db-clusters` command to check the platform version for existing cluster(s).

Example

```
aws rds describe-db-clusters \
    --db-cluster-identifier mydbcluster
```

Checking the default platform version

Amazon CLI

You can use the `describe-serverless-v2-platform-versions` command to check the details of a platform version or to check the default platform version that you will get when you create a new cluster.

Example

```
$ aws rds describe-serverless-v2-platform-versions
{
    "ServerlessV2PlatformVersions": [
        {
            "Engine": "aurora-postgresql",
            "ServerlessV2PlatformVersion": "3",
            "ServerlessV2PlatformVersionDescription": "Version 3 powered by Graviton
 3 processors offering scaling up to 256 ACUs, and performance improvement up to 30%
 compared to version 2"
            "ServerlessV2FeatureSupport": {
                "MinCapacity": 0
                "MaxCapacity": 256
            },
            "Status": "available",
            "IsDefault": True
        },
        ...
    ]
}

# describing the default platform version for an engine
$ aws rds describe-serverless-v2-platform-versions --engine aurora-postgresql --
default-only
{
    "ServerlessV2PlatformVersions": [
        {
            "Engine": "aurora-postgresql",
            "ServerlessV2PlatformVersion": "3",
            "ServerlessV2PlatformVersionDescription": "Version 3 powered by Graviton
 3 processors offering scaling up to 256 ACUs, and performance improvement up to 30%
 compared to version 2"
            "ServerlessV2FeatureSupport": {
                "MinCapacity": 0
```

```
                "MaxCapacity": 256
            },
            "Status": "available",
            "IsDefault": True
        }
    ]
}
```

Checking for pending platform version upgrades

You can use the `describe-pending-maintenance-actions` command to check whether there are any pending platform version upgrades for your Aurora serverless DB clusters.

To check for pending upgrades on a specific cluster, use the `--resource-identifier` parameter to specify the Amazon Resource Name (ARN) of your DB cluster:

Example

```
aws rds describe-pending-maintenance-actions \
    --resource-identifier arn:aws:rds:us-east-1:123456789012
    :cluster:my-serverless-cluster
```

Scheduling a platform version upgrade

After you identify a pending platform version upgrade, you can use the `apply-pending-maintenance-action` command to schedule when the upgrade occurs.

To schedule a platform version upgrade, specify the following parameters:


- `--resource-identifier` – The ARN of your Aurora serverless DB cluster
- `--apply-action` – Use `serverless-platform-version-update` to specify a platform version upgrade
- `--opt-in-type` – Choose when to apply the upgrade:
  - `immediate` – Apply the upgrade immediately
  - `next-maintenance` – Apply the upgrade during your next schedule

Adding an Aurora serverless reader


To add an Aurora serverless reader DB instance to your cluster, you follow the same general procedure as in Adding Aurora Replicas to a DB cluster. Choose the **Serverless v2** instance class for the new DB instance.

If the reader DB instance is the first Aurora serverless DB instance in the cluster, you also choose the capacity range. This setting applies to this reader DB instance and to any other Aurora serverless DB instances that you add to the cluster. Each Aurora serverless DB instance can scale between the minimum and maximum ACU values.

If any other Aurora serverless instances already exist in the cluster, the **Add reader** dialog shows the current capacity range for the cluster. In that case, you can't change the capacity. The following image shows the report of the current cluster capacity.

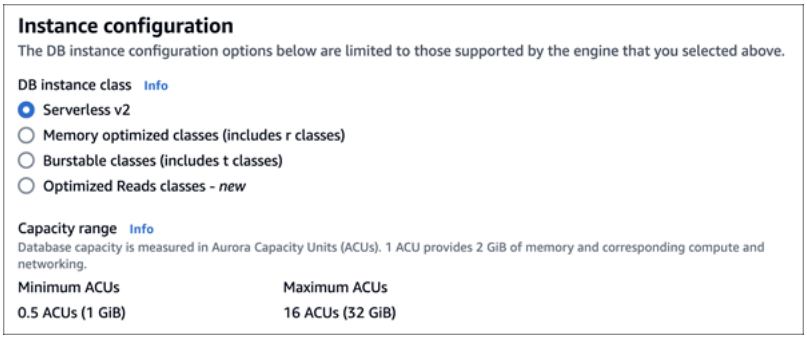

If you already added any Aurora serverless DB instances to the cluster, adding another Aurora serverless reader DB instance shows you the current capacity range. The following image shows those read-only controls.

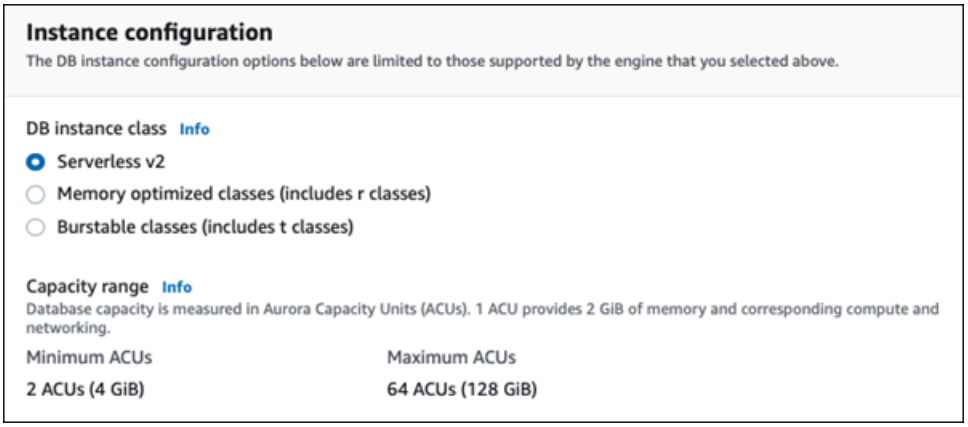

If you want to change the capacity range for the cluster, follow the procedure in Setting the Aurora serverless capacity range for a cluster.

For clusters containing more than one reader DB instance, the failover priority of each Aurora serverless reader DB instance plays an important part in how that DB instance scales up and down. You can't specify the priority when you initially create the cluster. Keep this property in mind when you add a second reader or later DB instance to your cluster. For more information, see Choosing the promotion tier for an Aurora serverless reader.


For other ways that you can see the current capacity range for a cluster, see Checking the capacity range for Aurora serverless.

Converting a provisioned writer or reader to Aurora serverless

You can convert a provisioned DB instance to use Aurora serverless. To do so, you follow the procedure in Modifying a DB instance in a DB cluster. The cluster must meet the requirements in Requirements and limitations for Aurora serverless. For example, Aurora serverless DB instances require that the cluster be running certain minimum engine versions.


Suppose that you are converting a running provisioned cluster to take advantage of Aurora serverless. In that case, you can minimize downtime by converting a DB instance to Aurora serverless as the first step in the switchover process. For the full procedure, see Converting a provisioned writer or reader to Aurora serverless.

If the DB instance that you convert is the first Aurora serverless DB instance in the cluster, you choose the capacity range for the cluster as part of the **Modify** operation. This capacity range applies to each Aurora serverless DB instance that you add to the cluster. The following image shows the page where you specify the minimum and maximum Aurora capacity units (ACUs).

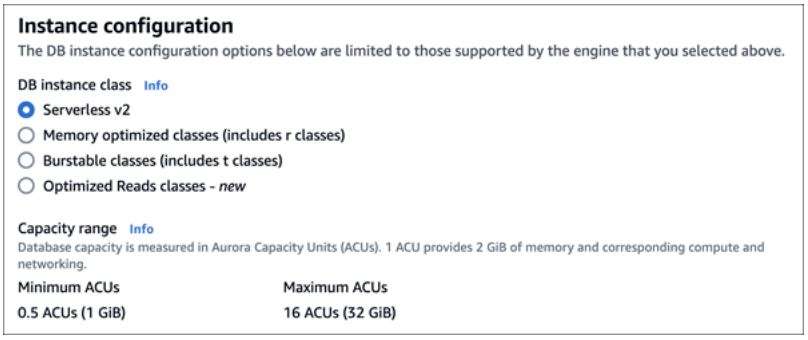

For details about the significance of the capacity range, see Aurora serverless capacity.

If the cluster already contains one or more Aurora serverless DB instances, you see the existing capacity range during the **Modify** operation. The following image shows an example of that information panel.

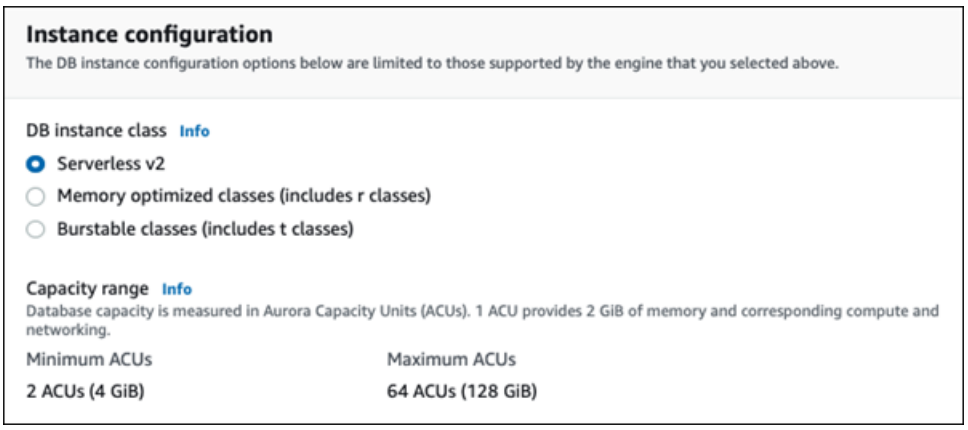

If you want to change the capacity range for the cluster after you add more Aurora serverless DB instances, follow the procedure in Setting the Aurora serverless capacity range for a cluster.

Converting an Aurora serverless writer or reader to provisioned

You can convert an Aurora serverless DB instance to a provisioned DB instance. To do so, you follow the procedure in Modifying a DB instance in a DB cluster. Choose a DB instance class other than **Serverless**.

You might convert an Aurora serverless DB instance to provisioned if it needs a larger capacity than is available with the maximum Aurora capacity units (ACUs) of an Aurora serverless DB instance. For example, the largest db.r5 and db.r6g DB instance classes have a larger memory capacity than an Aurora serverless DB instance can scale to.

> **Tip**
>
> Some of the older DB instance classes such as db.r3 and db.t2 aren't available for the Aurora versions that you use with Aurora serverless. To see which DB instance classes you can use when converting an Aurora serverless DB instance to a provisioned one, see Supported DB engines for DB instance classes.

If you are converting the writer DB instance of your cluster from Aurora serverless to provisioned, you can follow the procedure in Converting a provisioned writer or reader to Aurora serverless but in reverse. Switch one of the reader DB instances in the cluster from Aurora serverless to provisioned. Then perform a failover to make that provisioned DB instance into the writer.

Any capacity range that you previously specified for the cluster remains in place, even if all Aurora serverless DB instances are removed from the cluster. If you want to change the capacity range, you can modify the cluster, as explained in Setting the Aurora serverless capacity range for a cluster.

Pausing Aurora serverless DB instances

You can configure Aurora clusters to automatically pause and resume their Aurora serverless DB instances. For more information, see Scaling to Zero ACUs with automatic pause and resume for Aurora serverless.

Choosing the promotion tier for an Aurora serverless reader

For clusters containing multiple Aurora serverless DB instances or a mixture of provisioned and Aurora serverless DB instances, pay attention to the promotion tier setting for each Aurora serverless DB instance. This setting controls more behavior for Aurora serverless DB instances than for provisioned DB instances.

In the Amazon Web Services Management Console, you specify this setting using the **Failover priority** choice under **Additional configuration** for the **Create database**, **Modify instance**, and **Add reader** pages. You see this property for existing DB instances in the optional **Priority tier** column on the **Databases** page. You can also see this property on the details page for a DB cluster or DB instance.

For provisioned DB instances, the choice of tier 0–15 determines only the order in which Aurora chooses which reader DB instance to promote to the writer during a failover operation. For Aurora serverless reader DB instances, the tier number also determines whether the DB instance scales up to match the capacity of the writer DB instance or scales independently based on its own workload. Aurora serverless reader DB instances in tier 0 or 1 are kept at a minimum capacity at least as high as the writer DB instance. That way, they are ready to take over from the writer DB instance in case of a failover. If the writer DB instance is a provisioned DB instance, Aurora estimates the equivalent Aurora serverless capacity. It uses that estimate as the minimum capacity for the Aurora serverless reader DB instance.

Aurora serverless reader DB instances in tiers 2–15 don't have the same constraint on their minimum capacity. When they are idle, they can scale down to the minimum Aurora capacity unit (ACU) value specified in the cluster's capacity range.

The following Linux Amazon CLI example shows how to examine the promotion tiers of all the DB instances in your cluster. The final field includes a value of `True` for the writer DB instance and `False` for all the reader DB instances.

```
$ aws rds describe-db-clusters --db-cluster-identifier promotion-tier-demo \
  --query 'DBClusters[*].DBClusterMembers[*].
[PromotionTier,DBInstanceIdentifier,IsClusterWriter]' \
  --output text

1   instance-192  True
1   tier-01-4840  False
10  tier-10-7425  False
15  tier-15-6694  False
```

The following Linux Amazon CLI example shows how to change the promotion tier of a specific DB instance in your cluster. The commands first modify the DB instance with a new promotion tier. Then they wait for the DB instance to become available again and confirm the new promotion tier for the DB instance.

```
$ aws rds modify-db-instance --db-instance-identifier instance-192 --promotion-tier 0
$ aws rds wait db-instance-available --db-instance-identifier instance-192
$ aws rds describe-db-instances --db-instance-identifier instance-192 \
  --query '*[].[PromotionTier]' --output text
0
```

For more guidance about specifying promotion tiers for different use cases, see Aurora serverless scaling.

Using TLS/SSL with Aurora serverless

Aurora serverless can use the Transport Layer Security/Secure Sockets Layer (TLS/SSL) protocol to encrypt communications between clients and your Aurora serverless DB instances. It supports TLS/SSL versions 1.0, 1.1, and 1.2. For general information about using TLS/SSL with Aurora, see TLS connections to Aurora MySQL DB clusters.

To learn more about connecting to Aurora MySQL database with the MySQL client, see Connecting to a DB instance running the MySQL database engine.

Aurora serverless supports all TLS/SSL modes available to the MySQL client (`mysql`) and PostgreSQL client (`psql`), including those listed in the following table.

Description of TLS/SSL mode	mysql	psql
Connect without using TLS/SSL.	DISABLED	disable
Try the connection using TLS/SSL first, but fall back to non-SSL if necessary.	PREFERRED	prefer (default)
Enforce using TLS/SSL.	REQUIRED	require
Enforce TLS/SSL and verify the certificate authority (CA).	VERIFY_CA	verify-ca
Enforce TLS/SSL, verify the CA, and verify the CA hostname.	VERIFY_IDENTITY	verify-full

Aurora serverless uses wildcard certificates. If you specify the "verify CA" or the "verify CA and CA hostname" option when using TLS/SSL, first download the Amazon root CA 1 trust store from Amazon Trust Services. After doing so, you can identify this PEM-formatted file in your client command. To do so using the PostgreSQL client, do the following.

For Linux, macOS, or Unix:

```
psql 'host=endpoint user=user sslmode=require sslrootcert=amazon-root-CA-1.pem
 dbname=db-name'
```

To learn more about working with the Aurora PostgreSQL database using the Postgres client, see Connecting to a DB instance running the PostgreSQL database engine.

For more information about connecting to Aurora DB clusters in general, see Connecting to an Amazon Aurora DB cluster.

Supported cipher suites for connections to Aurora serverless DB clusters

By using configurable cipher suites, you can have more control over the security of your database connections. You can specify a list of cipher suites that you want to allow to secure client TLS/

SSL connections to your database. With configurable cipher suites, you can control the connection encryption that your database server accepts. Doing this prevents the use of ciphers that aren't secure or that are no longer used.

Aurora serverless DB clusters that are based on Aurora MySQL support the same cipher suites as Aurora MySQL provisioned DB clusters. For information about these cipher suites, see Configuring cipher suites for connections to Aurora MySQL DB clusters.

Aurora serverless DB clusters that are based on Aurora PostgreSQL support the same cipher suites as Aurora PostgreSQL provisioned DB clusters. For information about these cipher suites, see Configuring cipher suites for connections to Aurora PostgreSQL DB clusters.


Viewing Aurora serverless writers and readers

You can view the details of Aurora serverless DB instances in the same way that you do for provisioned DB instances. To do so, follow the general procedure from Viewing an Amazon Aurora DB cluster. A cluster might contain all Aurora serverless DB instances, all provisioned DB instances, or some of each.

After you create one or more Aurora serverless DB instances, you can view which DB instances are type **Serverless** and which are type **Instance**. You can also view the minimum and maximum Aurora capacity units (ACUs) that the Aurora serverless DB instance can use. Each ACU is a combination of processing (CPU) and memory (RAM) capacity. This capacity range applies to each Aurora serverless DB instance in the cluster. For the procedure to check the capacity range of a cluster or any Aurora serverless DB instance in the cluster, see Checking the capacity range for Aurora serverless.

In the Amazon Web Services Management Console, Aurora serverless DB instances are marked under the **Size** column in the **Databases** page. Provisioned DB instances show the name of a DB instance class such as r6g.xlarge. The Aurora Serverless DB instances show **Serverless** for the DB instance class, along with the DB instance's minimum and maximum capacity. For example, you might see **Serverless v2 (4–64 ACUs)** or **Serverless v2 (1–40 ACUs)**.

You can find the same information on the **Configuration** tab for each Aurora serverless DB instance in the console. For example, you might see an **Instance type** section such as the following. Here, the **Instance type** value is **Serverless v2**, the **Minimum capacity** value is **2 ACUs (4 GiB)**, and the **Maximum capacity** value is **64 ACUs (128 GiB)**.

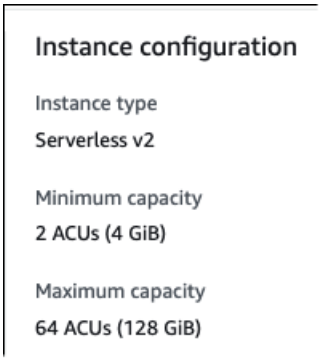

You can monitor the capacity of each Aurora serverless DB instance over time. That way, you can check the minimum, maximum, and average ACUs consumed by each DB instance. You can also check how close the DB instance came to its minimum or maximum capacity. To see such details in the Amazon Web Services Management Console, examine the graphs of Amazon CloudWatch metrics on the **Monitoring** tab for the DB instance. For information about the metrics to watch and how to interpret them, see Important Amazon CloudWatch metrics for Aurora serverless.

Logging for Aurora serverless

To turn on database logging, you specify the logs to enable using configuration parameters in your custom parameter group.

For Aurora MySQL, you can enable the following logs.

Aurora MySQL	Description
`general_log`	Creates the general log. Set to 1 to turn on. Default is off (0).
`log_queries_not_using_indexes`	Logs any queries to the slow query log that don't use an index. Default is off (0). Set to 1 to turn on this log.
`long_query_time`	Prevents fast-running queries from being logged in the slow query log. Can be set to a float between 0 and 31536000. Default is 0 (not active).
`server_audit_events`	The list of events to capture in the logs. Supported values are `CONNECT`, `QUERY`,

Aurora MySQL	Description
	QUERY_DCL , QUERY_DDL , QUERY_DML , and TABLE.
server_audit_logging	Set to 1 to turn on server audit logging. If you turn this on, you can specify the audit events to send to CloudWatch by listing them in the server_audit_events parameter.
slow_query_log	Creates a slow query log. Set to 1 to turn on the slow query log. Default is off (0).

For more information, see Using Advanced Auditing with an Amazon Aurora MySQL DB cluster.

For Aurora PostgreSQL, you can enable the following logs on your Aurora serverless DB instances.

Aurora PostgreSQL	Description
log_connections	Logs each successful connection.
log_disconnections	Logs end of a session including duration.
log_lock_waits	Default is 0 (off). Set to 1 to log lock waits.
log_min_duration_statement	The minimum duration (in milliseconds) for a statement to run before it's logged.
log_min_messages	Sets the message levels that are logged. Supported values are debug5, debug4, debug3, debug2, debug1, info, notice, warning, error, log, fatal, panic. To log performance data to the postgres log, set the value to debug1.
log_temp_files	Logs the use of temporary files that are above the specified kilobytes (kB).

Aurora PostgreSQL	Description
`log_statement`	Controls the specific SQL statements that get logged. Supported values are none, `ddl`, mod, and `all`. Default is none.

Topics

- Logging with Amazon CloudWatch
- Viewing Aurora serverless logs in Amazon CloudWatch
- Monitoring capacity with Amazon CloudWatch
- Monitoring Aurora serverless pause and resume activity

Logging with Amazon CloudWatch

After you use the procedure in Logging for Aurora serverless to choose which database logs to turn on, you can choose which logs to upload ("publish") to Amazon CloudWatch.

You can use Amazon CloudWatch to analyze log data, create alarms, and view metrics. By default, error logs for Aurora serverless are enabled and automatically uploaded to CloudWatch. You can also upload other logs from Aurora serverless DB instances to CloudWatch.

Then you choose which of those logs to upload to CloudWatch, by using the **Log exports** settings in the Amazon Web Services Management Console or the `--enable-cloudwatch-logs-exports` option in the Amazon CLI.

You can choose which of your Aurora serverless logs to upload to CloudWatch. For more information, see Using Advanced Auditing with an Amazon Aurora MySQL DB cluster.

As with any type of Aurora DB cluster, you can't modify the default DB cluster parameter group. Instead, create your own DB cluster parameter group based on a default parameter for your DB cluster and engine type. We recommend that you create your custom DB cluster parameter group before creating your Aurora serverless DB cluster, so that it's available to choose when you create a database on the console.

> **Note**
>
> For Aurora serverless, you can create both DB cluster and DB parameter groups.

Viewing Aurora serverless logs in Amazon CloudWatch

After you use the procedure in Logging with Amazon CloudWatch to choose which database logs to turn on, you can view the contents of the logs.

For more information on using CloudWatch with Aurora MySQL and Aurora PostgreSQL logs, see Monitoring log events in Amazon CloudWatch and Publishing Aurora PostgreSQL logs to Amazon CloudWatch Logs.

To view logs for your Aurora serverless DB cluster

1. Open the CloudWatch console at https://console.amazonaws.cn/cloudwatch/.
2. Choose your Amazon Web Services Region.
3. Choose **Log groups**.
4. Choose your Aurora serverless DB cluster log from the list. The log naming pattern is as follows.

```
/aws/rds/cluster/cluster-name/log_type
```

> **Note**
>
> For Aurora MySQL–compatible Aurora serverless DB clusters, the error log includes buffer pool scaling events even when there are no errors.

Monitoring capacity with Amazon CloudWatch

With Aurora serverless, you can use CloudWatch to to monitor the capacity and utilization of all the Aurora serverless DB instances in your cluster. You can view instance-level metrics to check the capacity of each Aurora serverless DB instance as it scales up and down. You can also compare the capacity-related metrics to other metrics to see how changes in workloads affect resource consumption. For example, you can compare `ServerlessDatabaseCapacity` to `DatabaseUsedMemory`, `DatabaseConnections`, and `DMLThroughput` to assess how your DB cluster is responding during operations. For details about the capacity-related metrics that apply to Aurora serverless, see Important Amazon CloudWatch metrics for Aurora serverless.

To monitor your Aurora serverless DB cluster's capacity

1. Open the CloudWatch console at https://console.amazonaws.cn/cloudwatch/.
2. Choose **Metrics**. All available metrics appear as cards in the console, grouped by service name.
3. Choose **RDS**.
4. (Optional) Use the **Search** box to find the metrics that are especially important for Aurora serverless: `ServerlessDatabaseCapacity`, `ACUUtilization`, `CPUUtilization`, and `FreeableMemory`.

We recommend that you set up a CloudWatch dashboard to monitor your Aurora serverless DB cluster capacity using the capacity-related metrics. To learn how, see Building dashboards with CloudWatch.

To learn more about using Amazon CloudWatch with Amazon Aurora, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs.

Monitoring Aurora serverless pause and resume activity

Aurora writes a separate log file for Aurora serverless DB instances with auto-pause enabled. Aurora writes to the log for each 10-minute interval that the instance isn't paused. Aurora retains up to seven of these logs, rotated daily. The current log file is named `instance.log`, and older logs are named using the pattern `instance.`*`YYYY-MM-DD`*`.`*`N`*`.log`.

This log is enabled by default for Aurora serverless DB instances with auto-pause enabled. You can view the contents of this log in the Amazon Web Services Management Console or by using the Amazon CLI or RDSP API. Currently, you can't upload this log to CloudWatch.

The events listed in DB instance events provide a high-level overview of pause and resume activity, such as the following:

- When the instance begins to pause, and when it finishes pausing.
- When the instance begins to resume, and when it finishes resuming.
- Cases where the instance attempted to pause, but some condition prevented it from pausing.

The `instance.log` provides more granular detail about the reasons why an Aurora serverless instance might or might not be able to pause.

The log might indicate that an instance resumed for different reasons:

- **user activity**: A database connection request. This could be from an interactive client session, an RDS Data API call, or a request to download logs from the instance.
- **background activity**: A broad category that includes all the reasons why Aurora resumes an instance. For example, when a connection request to a reader instance causes the writer instance to resume, the log for the reader indicates user activity, while the log for the writer classifies that resume request as background activity. For the reasons why Aurora might resume an instance other than a user connection request, see Resuming an auto-paused Aurora serverless instance.

When Aurora isn't aware of any conditions that would prevent the instance from pausing when the auto-pause interval expires, it periodically writes an informational message to the log. For clusters with only a single DB instance, the log contains this message:

```
[INFO] No auto-pause blockers registered since time
```

For clusters with multiple DB instances, the message is slightly different. That's because a writer might be unable to pause due to activity on any of the reader instances. If the activity on the reader finishes before the auto-pause interval expires on the writer, the writer is able to pause at the expected time.

```
[INFO] No auto-pause blockers registered since time.
Database might be required to maintain compute capacity for high availability.
```

If a pause operation starts, but a new database connection request arrives before the instance finishes pausing, the log contains this message:

```
[INFO] Unable to pause database due to a new database activity
```

If Aurora becomes aware of any conditions that definitely prevent the instance from pausing, the log contains this message that lists all such conditions:

```
[INFO] Auto-pause blockers registered since time: list_of_conditions
```

That way, Aurora doesn't prevent you from turning on replication, zero-ETL integration, Aurora Global Database, and so on in combination with the auto-pause feature. The log informs you when the use of such features might prevent auto-pause from taking effect.

The following are reasons why an Aurora serverless instance might exceed the auto-pause timeout interval, but be prevented from pausing:

- **database activity before auto-pause timeout**: The DB instance received a connection request before the timeout interval expired.
- **member of global database**: If the DB cluster is part of an Aurora global database, the Aurora serverless instances in the cluster don't pause. A cluster can change from a standalone cluster to a global database cluster. Thus, instances that formerly auto-paused might stop pausing, and report this reason in the log. Once a cluster becomes a member of a global database, it doesn't revert to a standalone cluster until you explicitly detach it. The primary cluster is still considered part of the global database even if you detach all of the secondary clusters.
- **replication capability configured**: The writer DB instance has engine-specific replication enabled, either binlog replication for MySQL or logical replication for PostgreSQL. This condition could also be caused by using another Aurora feature that requires turning on replication, such as zero-ETL integrations or Database Activity Streams (DAS).
- **continuous backup lag**: If the Aurora storage system hasn't finished applying the storage changes up to the current point in time, the writer instance doesn't pause until it catches up. This condition only affects the writer instance, and is expected to be relatively brief.
- **service or customer maintenance action**: If a maintenance operation starts, the DB instance won't pause again until that operation finishes. This condition includes a wide variety of operations that might be started by you or by Aurora, such as upgrades, cloning, changing configuration settings, upgrades, downloading log files, and so on. This event also happens when you request to delete an instance, and Aurora briefly resumes the instance as part of the deletion mechanism.
- **transient communication issue**: If Aurora can't determine whether the scaling configuration currently has a minimum capacity setting of zero ACUs, it doesn't pause the instance. This is expected to be a very rare occurrence.

Performance and scaling for Aurora serverless

The following procedures and examples show how you can set the capacity range for Aurora serverless clusters and their associated DB instances. You can also use procedures following to monitor how busy your DB instances are. Then you can use your findings to determine if you need to adjust the capacity range upward or downward.

Before you use these procedures, make sure that you are familiar with how Aurora serverless scaling works. For details, see Aurora serverless scaling.

Contents

- Choosing the Aurora serverless capacity range for an Aurora cluster
  - Choosing the minimum Aurora serverless capacity setting for a cluster
  - Choosing the maximum Aurora serverless capacity setting for a cluster
  - Example: Change the Aurora serverless capacity range of an Aurora MySQL cluster
  - Example: Change the Aurora serverless capacity range of an Aurora PostgreSQL cluster
- Working with parameter groups for Aurora serverless
  - Default parameter values
  - Maximum connections for Aurora serverless
  - Parameters that Aurora adjusts as Aurora serverless scales up and down
  - Parameters that Aurora computes based on Aurora serverless maximum capacity
- Avoiding out-of-memory errors and CPU saturation
- Important Amazon CloudWatch metrics for Aurora serverless
  - How Aurora serverless metrics apply to your Amazon bill
  - Examples of CloudWatch commands for Aurora serverless metrics
- Monitoring Aurora serverless performance with Performance Insights
- Troubleshooting Aurora serverless capacity issues

Choosing the Aurora serverless capacity range for an Aurora cluster

With Aurora serverless DB instances, you set the capacity range that applies to all the DB instances in your DB cluster at the same time that you add the first Aurora serverless DB instance to the DB cluster. For the procedure to do so, see Setting the Aurora serverless capacity range for a cluster.

You can also change the capacity range for an existing cluster. The following sections discuss in more detail how to choose appropriate minimum and maximum values and what happens when you make a change to the capacity range. For example, changing the capacity range can modify the default values of some configuration parameters. Applying all the parameter changes can require rebooting each Aurora serverless DB instance.

Topics

- Choosing the minimum Aurora serverless capacity setting for a cluster
- Choosing the maximum Aurora serverless capacity setting for a cluster
- Example: Change the Aurora serverless capacity range of an Aurora MySQL cluster

- Example: Change the Aurora serverless capacity range of an Aurora PostgreSQL cluster

Choosing the minimum Aurora serverless capacity setting for a cluster

It's tempting to always choose 0.5 for the minimum Aurora serverless capacity setting. That value allows the DB instance to scale down to the smallest capacity when it's completely idle, while remaining active. You can also enable automatic pause behavior by specifying a minimum capacity of 0 ACUs, as explained in Scaling to Zero ACUs with automatic pause and resume for Aurora serverless. However, depending on how you use that cluster and the other settings that you configure, a different minimum capacity might be the most effective. Consider the following factors when choosing the minimum capacity setting:

- The scaling rate for an Aurora serverless DB instance depends on its current capacity. The higher the current capacity, the faster it can scale up. If you need the DB instance to quickly scale up to a very high capacity, consider setting the minimum capacity to a value where the scaling rate meets your requirement.
- If you typically modify the DB instance class of your DB instances in anticipation of especially high or low workload, you can use that experience to make a rough estimate of the equivalent Aurora serverless capacity range. To determine the memory size to use in times of low traffic, consult Hardware specifications for DB instance classes for Aurora.

  For example, suppose that you use the db.r6g.xlarge DB instance class when your cluster has a low workload. That DB instance class has 32 GiB of memory. Thus, you can specify a minimum Aurora capacity unit (ACU) setting of 16 to set up an Aurora serverless DB instance that can scale down to approximately that same capacity. That's because each ACU corresponds to approximately 2 GiB of memory. You might specify a somewhat lower value to let the DB instance scale down further in case your db.r6g.xlarge DB instance was sometimes underutilized.
- If your application works most efficiently when the DB instances have a certain amount of data in the buffer cache, consider specifying a minimum ACU setting where the memory is large enough to hold the frequently accessed data. Otherwise, some data is evicted from the buffer cache when the Aurora serverless DB instances scale down to a lower memory size. Then when the DB instances scale back up, the information is read back into the buffer cache over time. If the amount of I/O to bring the data back into the buffer cache is substantial, it might be more effective to choose a higher minimum ACU value.
- If your Aurora serverless DB instances run most of the time at a particular capacity, consider specifying a minimum capacity setting that's lower than that baseline, but not too much lower.

Aurora serverless DB instances can most effectively estimate how much and how fast to scale up when the current capacity isn't drastically lower than the required capacity.

- If your provisioned workload has memory requirements that are too high for small DB instance classes such as T3 or T4g, choose a minimum ACU setting that provides memory comparable to an R5 or R6g DB instance.

  In particular, we recommend the following minimum capacity for use with the specified features (these recommendations are subject to change):

  - Performance Insights – 2 ACUs
  - Aurora global databases – 8 ACUs (applies only to the primary Amazon Web Services Region)
- In Aurora, replication occurs at the storage layer, so reader capacity doesn't directly affect replication. However, for Aurora serverless reader DB instances that scale independently, make sure that the minimum capacity is sufficient to handle workloads during write-intensive periods to avoid query latency. If reader DB instances in promotion tiers 2–15 experience performance issues, consider increasing the cluster's minimum capacity. For details on choosing whether reader DB instances scale along with the writer or independently, see Choosing the promotion tier for an Aurora serverless reader.
- If you have a DB cluster with Aurora serverless reader DB instances, the readers don't scale along with the writer DB instance when the promotion tier of the readers isn't 0 or 1. In that case, setting a low minimum capacity can result in excessive replication lag. That's because the readers might not have enough capacity to apply changes from the writer when the database is busy. We recommend that you set the minimum capacity to a value that represents a comparable amount of memory and CPU to the writer DB instance.
- The value of the `max_connections` parameter for Aurora serverlessDB instances is based on the memory size derived from the maximum ACUs. However, when you specify a minimum capacity of 0 or 0.5 ACUs on PostgreSQL-compatible DB instances, the maximum value of `max_connections` is capped at 2,000.

  If you intend to use the Aurora PostgreSQL cluster for a high-connection workload, consider using a minimum ACU setting of 1 or higher. For details about how Aurora serverless handles the `max_connections` configuration parameter, see Maximum connections for Aurora serverless.
- The time it takes for an Aurora serverless DB instance to scale from its minimum capacity to its maximum capacity depends on the difference between its minimum and maximum ACU values. When the current capacity of the DB instance is large, Aurora serverless scales up in larger increments than when the DB instance starts from a small capacity. Thus, if you specify a relatively large maximum capacity and the DB instance spends most of its time near that

capacity, consider increasing the minimum ACU setting. That way, an idle DB instance can scale back up to maximum capacity more quickly.

Choosing the maximum Aurora serverless capacity setting for a cluster

It's tempting to always choose some high value for the maximum Aurora serverless capacity setting. A large maximum capacity allows the DB instance to scale up the most when it's running an intensive workload. A low value avoids the possibility of unexpected charges. Depending on how you use that cluster and the other settings that you configure, the most effective value might be higher or lower than you originally thought. Consider the following factors when choosing the maximum capacity setting:

- The maximum capacity must be at least as high as the minimum capacity. You can set the minimum and maximum capacity to be identical. However, in that case the capacity never scales up or down. Thus, using identical values for minimum and maximum capacity isn't appropriate outside of testing situations.
- The maximum capacity must be higher than 0.5 ACUs. You can set the minimum and maximum capacity to be the same in most cases. However, you can't specify 0.5 for both the minimum and maximum. Use a value of 1 or higher for the maximum capacity.
- If you typically modify the DB instance class of your DB instances in anticipation of especially high or low workload, you can use that experience to estimate the equivalent Aurora serverless capacity range. To determine the memory size to use in times of high traffic, consult Hardware specifications for DB instance classes for Aurora.

  For example, suppose that you use the db.r6g.4xlarge DB instance class when your cluster has a high workload. That DB instance class has 128 GiB of memory. Thus, you can specify a maximum ACU setting of 64 to set up an Aurora serverless DB instance that can scale up to approximately that same capacity. That's because each ACU corresponds to approximately 2 GiB of memory. You might specify a somewhat higher value to let the DB instance scale up farther in case your db.r6g.4xlarge DB instance sometimes doesn't have enough capacity to handle the workload effectively.
- If you have a budgetary cap on your database usage, choose a value that stays within that cap even if all your Aurora serverless DB instances run at maximum capacity all the time. Remember that when you have *n* Aurora serverless DB instances in your cluster, the theoretical maximum Aurora serverless capacity that the cluster can consume at any moment is *n* times the maximum ACU setting for the cluster. (The actual amount consumed might be less, for example if some readers scale independently from the writer.)

- If you make use of Aurora serverless reader DB instances to offload some of the read-only workload from the writer DB instance, you might be able to choose a lower maximum capacity setting. You do this to reflect that each reader DB instance doesn't need to scale as high as if the cluster contains only a single DB instance.
- Suppose that you want to protect against excessive usage due to misconfigured database parameters or inefficient queries in your application. In that case, you might avoid accidental overuse by choosing a maximum capacity setting that's lower than the absolute highest that you could set.
- If spikes due to real user activity are rare but do happen, you can take those occasions into account when choosing the maximum capacity setting. If the priority is for the application to keep running with full performance and scalability, you can specify a maximum capacity setting that's higher than you observe in normal usage. If it's OK for the application to run with reduced throughput during very extreme spikes in activity, you can choose a slightly lower maximum capacity setting. Make sure that you choose a setting that still has enough memory and CPU resources to keep the application running.
- If you turn on settings in your cluster that increase the memory usage for each DB instance, take that memory into account when deciding on the maximum ACU value. Such settings include those for Performance Insights, Aurora MySQL parallel queries, Aurora MySQL performance schema, and Aurora MySQL binary log replication. Make sure that the maximum ACU value allows the Aurora serverless DB instances to scale up enough to handle the workload when those feature are being used. For information about troubleshooting problems caused by the combination of a low maximum ACU setting and Aurora features that impose memory overhead, see Avoiding out-of-memory errors and CPU saturation.

Example: Change the Aurora serverless capacity range of an Aurora MySQL cluster

The following Amazon CLI example shows how to update the ACU range for Aurora serverless DB instances in an existing Aurora MySQL cluster. Initially, the capacity range for the cluster is 8–32 ACUs.

```
aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query 'DBClusters[*].ServerlessV2ScalingConfiguration|[0]'
{
    "MinCapacity": 8.0,
    "MaxCapacity": 32.0
```

```
}
```

The DB instance is idle and scaled down to 8 ACUs. The following capacity-related settings apply to the DB instance at this point. To represent the size of the buffer pool in easily readable units, we divide it by 2 to the power of 30, yielding a measurement in gibibytes (GiB). That's because memory-related measurements for Aurora use units based on powers of 2, not powers of 10.

```
mysql> select @@max_connections;
+-------------------+
| @@max_connections |
+-------------------+
|              3000 |
+-------------------+
1 row in set (0.00 sec)

mysql> select @@innodb_buffer_pool_size;
+---------------------------+
| @@innodb_buffer_pool_size |
+---------------------------+
|                9294577664 |
+---------------------------+
1 row in set (0.00 sec)

mysql> select @@innodb_buffer_pool_size / pow(2,30) as gibibytes;
+-----------+
| gibibytes |
+-----------+
|   8.65625 |
+-----------+
1 row in set (0.00 sec)
```

Next, we change the capacity range for the cluster. After the `modify-db-cluster` command finishes, the ACU range for the cluster is 12.5–80.

```
aws rds modify-db-cluster --db-cluster-identifier serverless-v2-cluster \
  --serverless-v2-scaling-configuration MinCapacity=12.5,MaxCapacity=80

aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query 'DBClusters[*].ServerlessV2ScalingConfiguration|[0]'
{
    "MinCapacity": 12.5,
    "MaxCapacity": 80.0
```

```
}
```

Changing the capacity range caused changes to the default values of some configuration parameters. Aurora can apply some of those new defaults immediately. However, some of the parameter changes take effect only after a reboot. The `pending-reboot` status indicates that a reboot is needed to apply some parameter changes.

```
aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query '*[].{DBClusterMembers:DBClusterMembers[*].
{DBInstanceIdentifier:DBInstanceIdentifier,DBClusterParameterGroupStatus:DBClusterParameterGrou
[0]'
{
    "DBClusterMembers": [
        {
            "DBInstanceIdentifier": "serverless-v2-instance-1",
            "DBClusterParameterGroupStatus": "pending-reboot"
        }
    ]
}
```

At this point, the cluster is idle and the DB instance `serverless-v2-instance-1` is consuming 12.5 ACUs. The `innodb_buffer_pool_size` parameter is already adjusted based on the current capacity of the DB instance. The `max_connections` parameter still reflects the value from the former maximum capacity. Resetting that value requires rebooting the DB instance.

> **Note**
>
> If you set the `max_connections` parameter directly in a custom DB parameter group, no reboot is required.

```
mysql> select @@max_connections;
+-------------------+
| @@max_connections |
+-------------------+
|              3000 |
+-------------------+
1 row in set (0.00 sec)

mysql> select @@innodb_buffer_pool_size;
```

```
+----------------------------+
| @@innodb_buffer_pool_size |
+----------------------------+
|               15572402176 |
+----------------------------+
1 row in set (0.00 sec)

mysql> select @@innodb_buffer_pool_size / pow(2,30) as gibibytes;
+---------------+
| gibibytes     |
+---------------+
| 14.5029296875 |
+---------------+
1 row in set (0.00 sec)
```

Now we reboot the DB instance and wait for it to become available again.

```
aws rds reboot-db-instance --db-instance-identifier serverless-v2-instance-1
{
  "DBInstanceIdentifier": "serverless-v2-instance-1",
  "DBInstanceStatus": "rebooting"
}

aws rds wait db-instance-available --db-instance-identifier serverless-v2-instance-1
```

The `pending-reboot` status is cleared. The value `in-sync` confirms that Aurora has applied all the pending parameter changes.

```
aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query '*[].{DBClusterMembers:DBClusterMembers[*].
{DBInstanceIdentifier:DBInstanceIdentifier,DBClusterParameterGroupStatus:DBClusterParameterGrou
[0]'
{
    "DBClusterMembers": [
        {
            "DBInstanceIdentifier": "serverless-v2-instance-1",
            "DBClusterParameterGroupStatus": "in-sync"
        }
    ]
}
```

The innodb_buffer_pool_size parameter has increased to its final size for an idle DB instance. The max_connections parameter has increased to reflect a value derived from the maximum ACU value. The formula that Aurora uses for max_connections causes an increase of 1,000 when the memory size doubles.

```
mysql> select @@innodb_buffer_pool_size;
+---------------------------+
| @@innodb_buffer_pool_size |
+---------------------------+
|               16139681792 |
+---------------------------+
1 row in set (0.00 sec)

mysql> select @@innodb_buffer_pool_size / pow(2,30) as gibibytes;
+-----------+
| gibibytes |
+-----------+
|  15.03125 |
+-----------+
1 row in set (0.00 sec)

mysql> select @@max_connections;
+-------------------+
| @@max_connections |
+-------------------+
|              4000 |
+-------------------+
1 row in set (0.00 sec)
```

We set the capacity range to 0.5–128 ACUs, and reboot the DB instance. Now the idle DB instance has a buffer cache size that's less than 1 GiB, so we measure it in mebibytes (MiB). The max_connections value of 5000 is derived from the memory size of the maximum capacity setting.


```
mysql> select @@innodb_buffer_pool_size / pow(2,20) as mebibytes, @@max_connections;
+-----------+-------------------+
| mebibytes | @@max_connections |
+-----------+-------------------+
|       672 |              5000 |
+-----------+-------------------+
1 row in set (0.00 sec)
```

Example: Change the Aurora serverless capacity range of an Aurora PostgreSQL cluster

The following CLI examples show how to update the ACU range for Aurora serverless DB instances in an existing Aurora PostgreSQL cluster.

1. The capacity range for the cluster starts at 0.5–1 ACU.
2. Change the capacity range to 8–32 ACUs.
3. Change the capacity range to 12.5–80 ACUs.
4. Change the capacity range to 0.5–128 ACUs.
5. Return the capacity to its initial range of 0.5–1 ACU.

The following figure shows the capacity changes in Amazon CloudWatch.

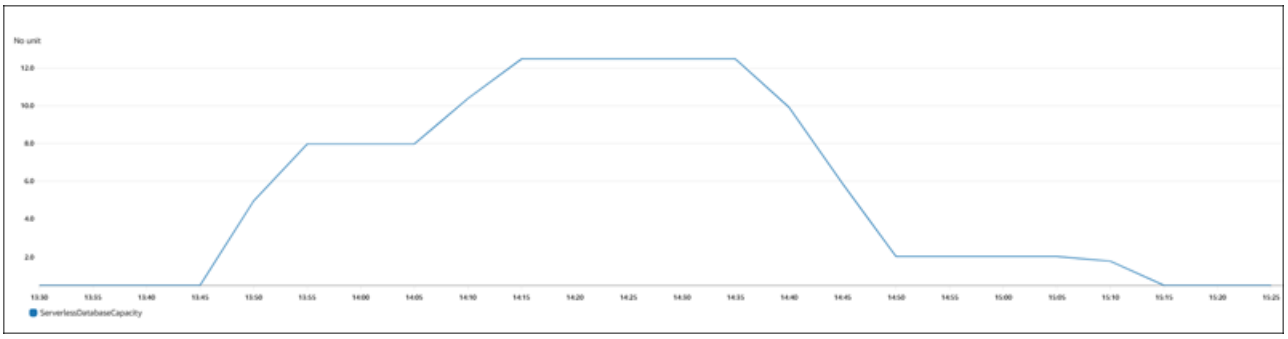

The DB instance is idle and scaled down to 0.5 ACUs. The following capacity-related settings apply to the DB instance at this point.

```
postgres=> show max_connections;
 max_connections
-----------------
 189
(1 row)

postgres=> show shared_buffers;
 shared_buffers
----------------
 16384
(1 row)
```

Next, we change the capacity range for the cluster. After the `modify-db-cluster` command finishes, the ACU range for the cluster is 8.0–32.

```
aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query 'DBClusters[*].ServerlessV2ScalingConfiguration|[0]'
{
    "MinCapacity": 8.0,
    "MaxCapacity": 32.0
}
```

Changing the capacity range causes changes to the default values of some configuration parameters. Aurora can apply some of those new defaults immediately. However, some of the parameter changes take effect only after a reboot. The `pending-reboot` status indicates that you need a reboot to apply some parameter changes.

```
aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query '*[].{DBClusterMembers:DBClusterMembers[*].
{DBInstanceIdentifier:DBInstanceIdentifier,DBClusterParameterGroupStatus:DBClusterParameterGrou
[0]'
{
    "DBClusterMembers": [
        {
            "DBInstanceIdentifier": "serverless-v2-instance-1",
            "DBClusterParameterGroupStatus": "pending-reboot"
        }
    ]
}
```

At this point, the cluster is idle and the DB instance `serverless-v2-instance-1` is consuming 8.0 ACUs. The `shared_buffers` parameter is already adjusted based on the current capacity of the DB instance. The `max_connections` parameter still reflects the value from the former maximum capacity. Resetting that value requires rebooting the DB instance.

> **Note**
>
> If you set the `max_connections` parameter directly in a custom DB parameter group, no reboot is required.

```
postgres=> show max_connections;
 max_connections
-----------------
```

```
 189
(1 row)

postgres=> show shared_buffers;
 shared_buffers
----------------
 1425408
(1 row)
```

We reboot the DB instance and wait for it to become available again.

```
aws rds reboot-db-instance --db-instance-identifier serverless-v2-instance-1
{
  "DBInstanceIdentifier": "serverless-v2-instance-1",
  "DBInstanceStatus": "rebooting"
}

aws rds wait db-instance-available --db-instance-identifier serverless-v2-instance-1
```

Now that the DB instance is rebooted, the `pending-reboot` status is cleared. The value `in-sync` confirms that Aurora has applied all the pending parameter changes.

```
aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query '*[].{DBClusterMembers:DBClusterMembers[*].
{DBInstanceIdentifier:DBInstanceIdentifier,DBClusterParameterGroupStatus:DBClusterParameterGrou
[0]'
{
    "DBClusterMembers": [
        {
            "DBInstanceIdentifier": "serverless-v2-instance-1",
            "DBClusterParameterGroupStatus": "in-sync"
        }
    ]
}
```

After rebooting, `max_connections` shows the value from the new maximum capacity.

```
postgres=> show max_connections;
 max_connections
-----------------
 5000
(1 row)
```

```
postgres=> show shared_buffers;
 shared_buffers
----------------
 1425408
(1 row)
```

Next, we change the capacity range for the cluster to 12.5–80 ACUs.

```
aws rds modify-db-cluster --db-cluster-identifier serverless-v2-cluster \
  --serverless-v2-scaling-configuration MinCapacity=12.5,MaxCapacity=80

aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query 'DBClusters[*].ServerlessV2ScalingConfiguration|[0]'
{
    "MinCapacity": 12.5,
    "MaxCapacity": 80.0
}
```

At this point, the cluster is idle and the DB instance `serverless-v2-instance-1` is consuming 12.5 ACUs. The `shared_buffers` parameter is already adjusted based on the current capacity of the DB instance. The `max_connections` value is still 5000.

```
postgres=> show max_connections;
 max_connections
-----------------
 5000
(1 row)

postgres=> show shared_buffers;
 shared_buffers
----------------
 2211840
(1 row)
```

We reboot again, but the parameter values stay the same. This is because `max_connections` has a maximum value of 5000 for an Aurora serverless DB cluster running Aurora PostgreSQL.

```
postgres=> show max_connections;
 max_connections
-----------------
```

```
 5000
(1 row)

postgres=> show shared_buffers;
 shared_buffers
----------------
 2211840
(1 row)
```

Now we set the capacity range from 0.5 to 128 ACUs. The DB cluster scales down to 10 ACUs, then to 2. We reboot the DB instance.

```
postgres=> show max_connections;
 max_connections
-----------------
 2000
(1 row)

postgres=> show shared_buffers;
 shared_buffers
----------------
 16384
(1 row)
```

The `max_connections` value for Aurora serverless DB instances is based on the memory size derived from the maximum ACUs. However, when you specify a minimum capacity of 0 or 0.5 ACUs on PostgreSQL-compatible DB instances, the maximum value of `max_connections` is capped at 2,000.

Now we return the capacity to its initial range of 0.5–1 ACU and reboot the DB instance. The `max_connections` parameter has returned to its original value.

```
postgres=> show max_connections;
 max_connections
-----------------
 189
(1 row)

postgres=> show shared_buffers;
 shared_buffers
----------------
 16384
```

```
(1 row)
```

Working with parameter groups for Aurora serverless

When you create your Aurora serverless DB cluster, you choose a specific Aurora DB engine and an associated DB cluster parameter group. If you aren't familiar with how Aurora uses parameter groups to apply configuration settings consistently across clusters, see Parameter groups for Amazon Aurora. All of those procedures for creating, modifying, applying, and other actions for parameter groups apply to Aurora serverless.

The parameter group feature works generally the same between provisioned clusters and clusters containing Aurora serverless DB instances:

- The default parameter values for all DB instances in the cluster are defined by the cluster parameter group.
- You can override some parameters for specific DB instances by specifying a custom DB parameter group for those DB instances. You might do so during debugging or performance tuning for specific DB instances. For example, suppose that you have a cluster containing some Aurora serverless DB instances and some provisioned DB instances. In this case, you might specify some different parameters for the provisioned DB instances by using a custom DB parameter group.
- For Aurora serverless, you can use all the parameters that have the value `provisioned` in the `SupportedEngineModes` attribute in the parameter group.

Topics

- Default parameter values
- Maximum connections for Aurora serverless
- Parameters that Aurora adjusts as Aurora serverless scales up and down
- Parameters that Aurora computes based on Aurora serverless maximum capacity

Default parameter values

The crucial difference between provisioned DB instances and Aurora serverless DB instances is that Aurora overrides any custom parameter values for certain parameters that are related to DB instance capacity. The custom parameter values still apply to any provisioned DB instances in your cluster. For more details about how Aurora serverless DB instances interpret the parameters from Aurora parameter groups, see Configuration parameters for Aurora clusters. For the specific

parameters that Aurora serverless overrides, see Parameters that Aurora adjusts as Aurora serverless scales up and down and Parameters that Aurora computes based on Aurora serverless maximum capacity.

You can get a list of default values for the default parameter groups for the various Aurora DB engines by using the describe-db-cluster-parameters CLI command and querying the Amazon Web Services Region. The following are values that you can use for the `--db-parameter-group-family` and `-db-parameter-group-name` options for engine versions that are compatible with Aurora serverless.

Database engine and version	Parameter group family	Default parameter group name
Aurora MySQL version 3	`aurora-mysql8.0`	`default.aurora-mysql8.0`
Aurora PostgreSQL version 13.x	`aurora-postgresql13`	`default.aurora-postgresql13`
Aurora PostgreSQL version 14.x	`aurora-postgresql14`	`default.aurora-postgresql14`
Aurora PostgreSQL version 15.x	`aurora-postgresql15`	`default.aurora-postgresql15`
Aurora PostgreSQL version 16.x	`aurora-postgresql16`	`default.aurora-postgresql16`
Aurora PostgreSQL version 17.x	`aurora-postgresql17`	`default.aurora-postgresql17`

The following example gets a list of parameters from the default DB cluster group for Aurora MySQL version 3 and Aurora PostgreSQL 13. Those are the Aurora MySQL and Aurora PostgreSQL versions that you use with Aurora serverless.

For Linux, macOS, or Unix:

```
aws rds describe-db-cluster-parameters \
  --db-cluster-parameter-group-name default.aurora-mysql8.0 \
```

```
  --query 'Parameters[*].
{ParameterName:ParameterName,SupportedEngineModes:SupportedEngineModes} |
    [?contains(SupportedEngineModes, `provisioned`) == `true`] | [*].[ParameterName]' \
  --output text

aws rds describe-db-cluster-parameters \
  --db-cluster-parameter-group-name default.aurora-postgresql13 \
  --query 'Parameters[*].
{ParameterName:ParameterName,SupportedEngineModes:SupportedEngineModes} |
    [?contains(SupportedEngineModes, `provisioned`) == `true`] | [*].[ParameterName]' \
  --output text
```

For Windows:

```
aws rds describe-db-cluster-parameters ^
  --db-cluster-parameter-group-name default.aurora-mysql8.0 ^
  --query 'Parameters[*].
{ParameterName:ParameterName,SupportedEngineModes:SupportedEngineModes} |
    [?contains(SupportedEngineModes, `provisioned`) == `true`] | [*].[ParameterName]' ^
  --output text

aws rds describe-db-cluster-parameters ^
  --db-cluster-parameter-group-name default.aurora-postgresql13 ^
  --query 'Parameters[*].
{ParameterName:ParameterName,SupportedEngineModes:SupportedEngineModes} |
    [?contains(SupportedEngineModes, `provisioned`) == `true`] | [*].[ParameterName]' ^
  --output text
```

Maximum connections for Aurora serverless

For both Aurora MySQL and Aurora PostgreSQL, Aurora serverless DB instances hold the `max_connections` parameter constant so that connections aren't dropped when the DB instance scales down. The default value for this parameter is derived from a formula based on the memory size of the DB instance. For details about the formula and the default values for provisioned DB instance classes, see Maximum connections to an Aurora MySQL DB instance and Maximum connections to an Aurora PostgreSQL DB instance.

When Aurora serverless evaluates the formula, it uses the memory size based on the maximum Aurora capacity units (ACUs) for the DB instance, not the current ACU value. If you change the default value, we recommend using a variation of the formula instead of specifying a constant value. That way, Aurora serverless can use an appropriate setting based on the maximum capacity.

When you change the maximum capacity of an Aurora serverless DB cluster, you have to reboot the Aurora serverless DB instances to update the `max_connections` value. This is because `max_connections` is a static parameter for Aurora serverless.

The default `max_connections` values for Aurora serverless correspond to the maximum ACU value and differ between Aurora MySQL and Aurora PostgreSQL.

The following table shows the default `max_connections` values for Aurora MySQL.

Maximum ACUs	Default maximum connections on Aurora MySQL
1	90
4	135
8	1,000
16	2,000
32	3,000
64	4,000
128	5,000
192	6,000
256	6,000

Note

These Aurora MySQL values are the same across all Aurora serverless platform versions.

The following table shows the default `max_connections` values for Aurora PostgreSQL, which vary by Aurora serverless platform version.

Maximum ACUs	Platform version 1 and 2	Platform version 3	Platform version 4
1	189	193	194
4	823	840	844
8	1,669	1,703	1,710
16	3,360	3,429	3,443
32	5,000	5,000	5,000
64	5,000	5,000	5,000
128	5,000	5,000	5,000
192	5,000	5,000	5,000
256	5,000	5,000	5,000
384			5,000

For Aurora PostgreSQL, the default value depends on the Aurora serverless platform version of your DB cluster.

Note

The `max_connections` value for Aurora serverless DB instances is based on the memory size derived from the maximum ACUs. However, when you specify a minimum capacity of 0 or 0.5 ACUs on PostgreSQL-compatible DB instances, the maximum value of `max_connections` is capped at 2,000.

For specific examples showing how `max_connections` changes with the maximum ACU value, see Example: Change the Aurora serverless capacity range of an Aurora MySQL cluster and Example: Change the Aurora serverless capacity range of an Aurora PostgreSQL cluster.

Parameters that Aurora adjusts as Aurora serverless scales up and down

During autoscaling, Aurora serverless needs to be able to change parameters for each DB instance to work best for the increased or decreased capacity. Thus, you can't override some parameters related to capacity. For some parameters that you can override, avoid hardcoding fixed values. The following considerations apply to these settings that are related to capacity.

For Aurora MySQL, Aurora serverless resizes some parameters dynamically during scaling. For the following parameters, Aurora serverless doesn't use any custom parameter values that you specify:

- `innodb_buffer_pool_size`
- `innodb_purge_threads`
- `table_definition_cache`
- `table_open_cache`

For Aurora PostgreSQL, Aurora serverless resizes the following parameter dynamically during scaling. For the following parameters, Aurora serverless doesn't use any custom parameter values that you specify:

- `shared_buffers`

For all parameters other than those listed here, Aurora serverless DB instances work the same as provisioned DB instances. The default parameter value is inherited from the cluster parameter group. You can modify the default for the whole cluster by using a custom cluster parameter group. Or you can modify the default for certain DB instances by using a custom DB parameter group. Dynamic parameters are updated immediately. Changes to static parameters only take effect after you reboot the DB instance.

Parameters that Aurora computes based on Aurora serverless maximum capacity

For the following parameters, Aurora PostgreSQL uses default values that are derived from the memory size based on the maximum ACU setting, the same as with `max_connections`:

- `autovacuum_max_workers`
- `autovacuum_vacuum_cost_limit`
- `autovacuum_work_mem`
- `effective_cache_size`

- `maintenance_work_mem`

Avoiding out-of-memory errors and CPU saturation

If one of your Aurora serverless DB instances consistently reaches the limit of its maximum capacity, Aurora indicates this condition by setting the DB instance to a status of `incompatible-parameters`. While the DB instance has the `incompatible-parameters` status, some operations are blocked. For example, you can't upgrade the engine version. However, you can still modify the capacity range for the DB cluster.

Typically, your DB instance goes into this status when it restarts frequently because the workload requires more memory or CPU than the maximum capacity allows. Aurora records an event when this type of restart happens. The event identifies whether the cause was memory pressure, CPU pressure, or both. You can view the event by following the procedure in Viewing Amazon RDS events. Unusually high memory usage can happen because of overhead from turning on settings such as Performance Insights and IAM authentication. It can also come from a heavy workload on your DB instance or from managing the metadata associated with a large number of schema objects. High CPU usage can result from a heavy or inefficient workload, or from a large number of concurrent connections.

If the memory or CPU pressure becomes lower so that the DB instance doesn't reach its maximum capacity very often, Aurora automatically changes the DB instance status back to `available`. Repeated events indicate that your workload still requires more memory or CPU than the maximum capacity allows.

To recover from this condition, you can take some or all of the following actions:

- Increase the lower limit on capacity for Aurora serverless DB instances by changing the minimum Aurora capacity unit (ACU) value for the cluster. Doing so avoids issues where an idle database scales down to a capacity with less memory than is needed for the features that are turned on in your cluster. After changing the ACU settings for the cluster, reboot the Aurora serverless DB instance. Doing so evaluates whether Aurora can reset the status back to `available`.
- Increase the upper limit on capacity for Aurora serverless DB instances by changing the maximum ACU value for the cluster. Doing so avoids issues where a busy database can't scale up to a capacity with enough memory and CPU for the database workload and the features that are turned on in your cluster. After changing the ACU settings for the cluster, reboot the Aurora serverless DB instance. Doing so evaluates whether Aurora can reset the status back to `available`.

- Turn off configuration settings that require memory overhead. For example, suppose that you have features such as Amazon Identity and Access Management (IAM), Performance Insights, or Aurora MySQL binary log replication turned on but don't use them. If so, you can turn them off. Or you can adjust the minimum and maximum capacity values for the cluster higher to account for the memory used by those features. For guidelines about choosing minimum and maximum capacity settings, see Choosing the Aurora serverless capacity range for an Aurora cluster.
- Reduce the workload on the DB instance. For example, you can add reader DB instances to the cluster to spread the load from read-only queries across more DB instances.
- Tune the SQL code used by your application to use fewer resources. For example, you can examine your query plans, check the slow query log, or adjust the indexes on your tables. You can also perform other traditional kinds of SQL tuning.

Important Amazon CloudWatch metrics for Aurora serverless

To get started with Amazon CloudWatch for your Aurora serverless DB instance, see Viewing Aurora serverless logs in Amazon CloudWatch. To learn more about how to monitor Aurora DB clusters through CloudWatch, see Monitoring log events in Amazon CloudWatch.

You can view your Aurora serverless DB instances in CloudWatch to monitor the capacity consumed by each DB instance with the `ServerlessDatabaseCapacity` metric. You can also monitor all of the standard Aurora CloudWatch metrics, such as `DatabaseConnections` and `Queries`. For the full list of CloudWatch metrics that you can monitor for Aurora, see Amazon CloudWatch metrics for Amazon Aurora. The metrics are divided into cluster-level and instance-level metrics, in Cluster-level metrics for Amazon Aurora and Instance-level metrics for Amazon Aurora.

The following CloudWatch instance-level metrics are important to monitor for you to understand how your Aurora serverless DB instances are scaling up and down. All of these metrics are calculated every second. That way, you can monitor the current status of your Aurora serverless DB instances. You can set alarms to notify you if any Aurora serverless DB instance approaches a threshold for metrics related to capacity. You can determine if the minimum and maximum capacity settings are appropriate, or if you need to adjust them. You can determine where to focus your efforts for optimizing the efficiency of your database.

- `ServerlessDatabaseCapacity`. As an instance-level metric, it reports the number of ACUs represented by the current DB instance capacity. As a cluster-level metric, it represents the average of the `ServerlessDatabaseCapacity` values of all the Aurora serverless DB instances in the cluster. It's available at the DB instance level and at the cluster level.

- `ACUUtilization`. This metric is new in Aurora serverless. This value is represented as a percentage. It's calculated as the value of the `ServerlessDatabaseCapacity` metric divided by the maximum ACU value of the DB cluster. Consider the following guidelines to interpret this metric and take action:
  - If this metric approaches a value of `100.0`, the DB instance has scaled up as high as it can. Consider increasing the maximum ACU setting for the cluster. That way, both writer and reader DB instances can scale to a higher capacity.
  - Suppose that a read-only workload causes a reader DB instance to approach an `ACUUtilization` of `100.0`, while the writer DB instance isn't close to its maximum capacity. In that case, consider adding additional reader DB instances to the cluster. That way, you can spread the read-only part of the workload spread across more DB instances, reducing the load on each reader DB instance.
  - Suppose that you are running a production application, where performance and scalability are the primary considerations. In that case, you can set the maximum ACU value for the cluster to a high number. Your goal is for the `ACUUtilization` metric to always be below `100.0`. With a high maximum ACU value, you can be confident that there's enough room in case there are unexpected spikes in database activity. You are only charged for the database capacity that's actually consumed.
- `CPUUtilization`. This metric is interpreted differently in Aurora serverless than in provisioned DB instances. For Aurora serverless, this value is a percentage that's calculated as the amount of CPU currently being used divided by the CPU capacity that's available under the maximum ACU value of the DB cluster. Aurora monitors this value automatically and scales up your Aurora serverless DB instance when the DB instance consistently uses a high proportion of its CPU capacity.

  If this metric approaches a value of `100.0`, the DB instance has reached its maximum CPU capacity. Consider increasing the maximum ACU setting for the cluster. If this metric approaches a value of `100.0` on a reader DB instance, consider adding additional reader DB instances to the cluster. That way, you can spread the read-only part of the workload spread across more DB instances, reducing the load on each reader DB instance.
- `FreeableMemory`. This value represents the amount of unused memory that is available when the Aurora serverless DB instance is scaled to its maximum capacity. For every ACU that the current capacity is below the maximum capacity, this value increases by approximately 2 GiB. Thus, this metric doesn't approach zero until the DB instance is scaled up as high as it can.

If this metric approaches a value of `0`, the DB instance has scaled up as much as it can and is nearing the limit of its available memory. Consider increasing the maximum ACU setting for the cluster. If this metric approaches a value of `0` on a reader DB instance, consider adding additional reader DB instances to the cluster. That way, the read-only part of the workload can be spread across more DB instances, reducing the memory usage on each reader DB instance.

- `TempStorageIOPS`. The number of IOPS done on local storage attached to the DB instance. It includes the IOPS for both reads and writes. This metric represents a count and is measured once per second. This is a new metric for Aurora serverless. For details, see Instance-level metrics for Amazon Aurora.
- `TempStorageThroughput`. The amount of data transferred to and from local storage associated with the DB instance. This metric represents bytes and is measured once per second. This is a new metric for Aurora serverless. For details, see Instance-level metrics for Amazon Aurora.

Typically, most scaling up for Aurora serverless DB instances is caused by memory usage and CPU activity. The `TempStorageIOPS` and `TempStorageThroughput` metrics can help you to diagnose the rare cases where network activity for transfers between your DB instance and local storage devices is responsible for unexpected capacity increases. To monitor other network activity, you can use these existing metrics:

- `NetworkReceiveThroughput`
- `NetworkThroughput`
- `NetworkTransmitThroughput`
- `StorageNetworkReceiveThroughput`
- `StorageNetworkThroughput`
- `StorageNetworkTransmitThroughput`

You can have Aurora publish some or all database logs to Amazon CloudWatch Logs. For instructions, see the following depending on your database engine:

- the section called “Publishing Aurora PostgreSQL logs to CloudWatch Logs”
- the section called “Publishing Aurora MySQL logs to CloudWatch Logs”

How Aurora serverless metrics apply to your Amazon bill

The Aurora serverless charges on your Amazon bill are calculated based on the same `ServerlessDatabaseCapacity` metric that you can monitor. The billing mechanism can differ from the computed CloudWatch average for this metric in cases where you use Aurora serverless capacity for only part of an hour. It can also differ if system issues make the CloudWatch metric unavailable for brief periods. Thus, you might see a slightly different value of ACU-hours on your bill than if you compute the number yourself from the `ServerlessDatabaseCapacity` average value.

Examples of CloudWatch commands for Aurora serverless metrics

The following Amazon CLI examples demonstrate how you can monitor the most important CloudWatch metrics related to Aurora serverless. In each case, replace the `Value=` string for the `--dimensions` parameter with the identifier of your own Aurora serverless DB instance.

The following Linux example displays the minimum, maximum, and average capacity values for a DB instance, measured every 10 minutes over one hour. The Linux `date` command specifies the start and end times relative to the current date and time. The `sort_by` function in the `--query` parameter sorts the results chronologically based on the `Timestamp` field.

```
aws cloudwatch get-metric-statistics --metric-name "ServerlessDatabaseCapacity" \
  --start-time "$(date -d '1 hour ago')" --end-time "$(date -d 'now')" --period 600 \
  --namespace "AWS/RDS" --statistics Minimum Maximum Average \
  --dimensions Name=DBInstanceIdentifier,Value=my_instance \
  --query 'sort_by(Datapoints[*].
{min:Minimum,max:Maximum,avg:Average,ts:Timestamp},&ts)' --output table
```

The following Linux examples demonstrate monitoring the capacity of each DB instance in a cluster. They measure the minimum, maximum, and average capacity utilization of each DB instance. The measurements are taken once each hour over a three-hour period. These examples use the `ACUUtilization` metric representing a percentage of the upper limit on ACUs, instead of `ServerlessDatabaseCapacity` representing a fixed number of ACUs. That way, you don't need to know the actual numbers for the minimum and maximum ACU values in the capacity range. You can see percentages ranging from 0 to 100.

```
aws cloudwatch get-metric-statistics --metric-name "ACUUtilization" \
  --start-time "$(date -d '3 hours ago')" --end-time "$(date -d 'now')" --period 3600 \
  --namespace "AWS/RDS" --statistics Minimum Maximum Average \
  --dimensions Name=DBInstanceIdentifier,Value=my_writer_instance \
```

```
  --query 'sort_by(Datapoints[*].
{min:Minimum,max:Maximum,avg:Average,ts:Timestamp},&ts)' --output table

aws cloudwatch get-metric-statistics --metric-name "ACUUtilization" \
  --start-time "$(date -d '3 hours ago')" --end-time "$(date -d 'now')" --period 3600 \
  --namespace "AWS/RDS" --statistics Minimum Maximum Average \
  --dimensions Name=DBInstanceIdentifier,Value=my_reader_instance \
  --query 'sort_by(Datapoints[*].
{min:Minimum,max:Maximum,avg:Average,ts:Timestamp},&ts)' --output table
```

The following Linux example does similar measurements as the previous ones. In this case, the measurements are for the `CPUUtilization` metric. The measurements are taken every 10 minutes over a 1-hour period. The numbers represent the percentage of available CPU used, based on the CPU resources available to the maximum capacity setting for the DB instance.

```
aws cloudwatch get-metric-statistics --metric-name "CPUUtilization" \
  --start-time "$(date -d '1 hour ago')" --end-time "$(date -d 'now')" --period 600 \
  --namespace "AWS/RDS" --statistics Minimum Maximum Average \
  --dimensions Name=DBInstanceIdentifier,Value=my_instance \
  --query 'sort_by(Datapoints[*].
{min:Minimum,max:Maximum,avg:Average,ts:Timestamp},&ts)' --output table
```

The following Linux example does similar measurements as the previous ones. In this case, the measurements are for the `FreeableMemory` metric. The measurements are taken every 10 minutes over a 1-hour period.

```
aws cloudwatch get-metric-statistics --metric-name "FreeableMemory" \
  --start-time "$(date -d '1 hour ago')" --end-time "$(date -d 'now')" --period 600 \
  --namespace "AWS/RDS" --statistics Minimum Maximum Average \
  --dimensions Name=DBInstanceIdentifier,Value=my_instance \
  --query 'sort_by(Datapoints[*].
{min:Minimum,max:Maximum,avg:Average,ts:Timestamp},&ts)' --output table
```

Monitoring Aurora serverless performance with Performance Insights

You can use Performance Insights to monitor the performance of Aurora serverless DB instances. For Performance Insights procedures, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

The following new detailed per-query and database counter metrics, exposed through the Performance Insights API, apply to Aurora serverless DB instances:

- `os.general.serverlessDatabaseCapacity` – The current capacity of the DB instance in ACUs. The value corresponds to the `ServerlessDatabaseCapacity` CloudWatch metric for the DB instance.
- `os.general.acuUtilization` – The percentage of current capacity out of the maximum configured capacity. The value corresponds to the `ACUUtilization` CloudWatch metric for the DB instance.
- `os.general.maxConfiguredAcu` – The maximum capacity that you configured for this Aurora serverless DB instance. It's measured in ACUs.
- `os.general.minConfiguredAcu` – The minimum capacity that you configured for this Aurora serverless DB instance. It's measured in ACUs

For the full list of detailed per-query and database counter metrics, see Detailed Database Metrics.

When vCPU values are shown for an Aurora serverless DB instance in Performance Insights, those values represent estimates based on the ACU value for the DB instance. At the default interval of one minute, any fractional vCPU values are rounded up to the nearest whole number. For longer intervals, the vCPU value shown is the average of the integer vCPU values for each minute.

Troubleshooting Aurora serverless capacity issues

In some cases, Aurora serverless doesn't scale down to the minimum capacity, even with no load on the database. This can happen for the following reasons:

- Certain features can increase resource usage and prevent the database from scaling down to minimum capacity. These features include the following:
  - Aurora global databases
  - Exporting CloudWatch Logs
  - Enabling `pg_audit` on Aurora PostgreSQL–compatible DB clusters
  - Enhanced Monitoring
  - Performance Insights

  For more information, see Choosing the minimum Aurora serverless capacity setting for a cluster.
- If a reader instance isn't scaling down to the minimum and stays at the same or higher capacity than the writer instance, then check the priority tier of the reader instance. Aurora serverless reader DB instances in tier 0 or 1 are kept at a minimum capacity at least as high as the writer DB instance. Change the priority tier of the reader to 2 or higher so that it scales up and down

independently of the writer. For more information, see Choosing the promotion tier for an Aurora serverless reader.

- Set any database parameters that impact the size of shared memory to their default values. Setting a value higher than the default increases the shared memory requirement and prevents the database from scaling down to the minimum capacity. Examples are `max_connections` and `max_locks_per_transaction`.

  > **Note**
  >
  > Updating shared memory parameters requires a database restart for the changes to take effect.

- Heavy database workloads can increase resource usage.
- Large database volumes can increase resource usage.

  Amazon Aurora uses memory and CPU resources for DB cluster management. Aurora requires more CPU and memory to manage DB clusters with larger database volumes. If your cluster's minimum capacity is less than the minimum required for cluster management, your cluster won't scale down to the minimum capacity.
- Background processes, such as purge, can also increase resource usage.
- Platform version limitations can affect scaling capabilities. The available scaling range for a given cluster is influenced by both engine version and hardware (platform version). It is possible to have a more capable engine version running on a less capable platform version and vice-versa.

If the database still doesn't scale down to the minimum capacity configured, then stop and restart the database to reclaim any memory fragments that might have built up over time. Stopping and starting a database results in downtime, so we recommend doing this sparingly.

Scaling to Zero ACUs with automatic pause and resume for Aurora serverless

You can specify that Aurora serverless DB instances scale down to zero ACUs and automatically pause, if they don't have any connections initiated by user activity within a specified time period. You do so by specifying a minimum ACU value of zero for your DB cluster. You aren't charged for instance capacity while an instance is in the paused state. Enabling the automatic pause and resume feature (auto-pause) for Aurora clusters that are lightly used or have extended periods of inactivity can help you to manage costs for your database fleet.

> **Note**
>
> The auto-pause feature is available for Aurora serverless with both Aurora PostgreSQL and Aurora MySQL. You might need to upgrade your Aurora database engine version to take advantage of this feature. For the engine versions where a minimum capacity of 0 ACUs is available, see Aurora serverless capacity.

Topics

- Overview of the Aurora serverless auto-pause feature
- Prerequisites and Limitations for the Aurora serverless auto-pause feature
- Turning the auto-pause feature on and off
- How the Aurora serverless auto-pause feature works
- How Aurora serverless auto-pause works for different types of Aurora clusters
- Monitoring Aurora clusters that use auto-pause
- Troubleshooting for Aurora serverless auto-pause
- Application design considerations for the Aurora serverless auto-pause feature

Overview of the Aurora serverless auto-pause feature

Aurora serverless DB instances can automatically pause after a period with no user connections, and automatically resume when a connection request arrives. The Aurora serverless automatic pause/resume feature helps to manage costs for systems that don't have a stringent service level objective (SLO). For example, you might enable this feature for clusters used for development and

testing, or for internal applications where a brief pause is acceptable while the database resumes. If your workload has periods of inactivity and can tolerate slight delays in connecting while the instance resumes, consider using auto-pause with your Aurora serverless instances to reduce costs.

You control this behavior by specifying whether the Aurora serverless DB instances in a cluster can automatically pause or not, and how long each instance must be idle before it pauses. To enable the auto-pause behavior for all the Aurora serverless DB instances in an Aurora cluster, you set the minimum capacity value for the cluster to zero ACUs.

The cost-savings benefits of the auto-pause feature are similar to using the stop/start cluster feature. Auto-pause for Aurora serverless has the additional benefits of a faster resume than starting a stopped cluster, and automating the process of determining when to pause and resume each DB instance.

The auto-pause feature also provides additional granularity in controlling costs for compute resources within your cluster. You can enable some reader instances to pause even while the writer instance and other readers in the cluster remain active at all times. You do so by assigning the reader instances that can pause independently of other instances a failover priority in the range 2-15.

The writer instances and all reader instances with failover priority 0 and 1 always pause and resume at the same time. Thus, the instances in this group pause after none of them have any connections for the specified time interval.

Aurora DB clusters can contain a combination of writer and reader DB instances and provisioned and Aurora serverless DB instances. Therefore, to use this feature effectively, it's helpful to understand the following aspects of the auto-pause mechanism:

- The circumstances when a DB instance might automatically pause.
- When a DB instance might be prevented from pausing. For example, enabling some Aurora features or performing certain kinds of operations on the cluster might prevent instances from pausing, even without any connections to those instances.
- The consequences for monitoring and billing while an instance is paused.
- What actions cause a DB instance to resume processing.
- How the capacity of a DB instance changes around the time of the pause and resume events.
- How to control the idle interval before a DB instance pauses.
- How to code application logic to handle the period while a DB instance is resuming processing.

Prerequisites and Limitations for the Aurora serverless auto-pause feature

Before using the auto-pause feature, check which engine versions to use. Also, check whether auto-pause works in combination with the other Aurora features you intend to use. You can't turn on auto-pause if you're using an engine version that doesn't support it. For incompatible features, you won't get any error if you use them in combination with auto-pause. If the cluster is using any incompatible features or settings, the Aurora serverless instances won't automatically pause.

- If you're using Aurora PostgreSQL, the database engine must be running at least version 16.3, 15.7, 14.12, or 13.15.
- If you're using Aurora MySQL, the database engine must be running version 3.08.0 or higher.
- For the full list of engine versions and Amazon Regions where this feature is available, see Supported Regions and Aurora DB engines for Aurora serverless.
- When an Aurora serverless instance resumes, its capacity might be lower than it was when the instance was paused.

Certain conditions or settings prevent Aurora serverless instances from automatically pausing. For more information, see Situations where Aurora serverless doesn't auto-pause.

Turning the auto-pause feature on and off

You can turn the auto-pause feature on and off at the cluster level. To do so, you use the same procedures as when you adjust the minimum and maximum capacity for the cluster. The auto-pause feature is represented by a minimum capacity of 0 ACUs.

Topics

- Turning on auto-pause for Aurora serverless instances in a cluster
- Configurable Aurora serverless auto-pause timeout interval
- Resuming an auto-paused Aurora serverless instance
- Turning off auto-pause for Aurora serverless instances in a cluster

Turning on auto-pause for Aurora serverless instances in a cluster

Follow the procedure in Setting the Aurora serverless capacity range for a cluster. For the minimum capacity, choose 0 ACUs. When you choose a minimum capacity of 0 ACUs, you can also specify the length of time for the instance to be idle before it's automatically paused.

The following CLI example shows how you might create an Aurora cluster with the auto-pause feature enabled and the auto-pause interval set to ten minutes (600 seconds).

```
aws rds create-db-cluster \
    --db-cluster-identifier my-serverless-v2-cluster \
    --region eu-central-1 \
    --engine aurora-mysql \
    --engine-version 8.0 \
    --serverless-v2-scaling-configuration
 MinCapacity=0,MaxCapacity=4,SecondsUntilAutoPause=600 \
    --master-username myuser \
    --manage-master-user-password
```

The following CLI example shows how you might turn on the auto-pause feature for an existing Aurora cluster. This example sets the auto-pause interval to one hour (3600 seconds).

```
aws rds modify-db-cluster --db-cluster-identifier serverless-v2-cluster \
  --serverless-v2-scaling-configuration
 MinCapacity=0,MaxCapacity=80,SecondsUntilAutoPause=3600

aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query 'DBClusters[*].ServerlessV2ScalingConfiguration|[0]'
{
    "MinCapacity": 0,
    "MaxCapacity": 80.0,
    "SecondsUntilAutoPause": 3600
}
```

Configurable Aurora serverless auto-pause timeout interval

The timeout interval is represented in the `ServerlessV2ScalingConfiguration` attribute of your Aurora cluster. You can specify this interval in the Amazon Web Services Management Console when creating or modifying an Aurora cluster, if the minimum capacity is set to zero ACUs. You can specify it in the Amazon CLI by using the `--serverless-v2-scaling-configuration`

parameter when creating or modifying an Aurora cluster. You can specify it in the RDS API by using the `ServerlessV2ScalingConfiguration` parameter when creating or modifying an Aurora cluster.

The minimum interval that you can set is 300 seconds (five minutes). That's the default if you don't specify an interval. The maximum interval that you can set is 86,400 seconds (one day).

Suppose that you turn off the auto-pause feature for a cluster by changing the cluster's minimum capacity to a nonzero value. In that case, the interval property is removed from the `ServerlessV2ScalingConfiguration` attribute. The absence of that property provides an extra confirmation that the auto-pause feature is turned off for that cluster. If you later turn auto-pause back on, you can specify any custom interval again at that time.

Resuming an auto-paused Aurora serverless instance

- When you connect to a paused Aurora serverless instance, it automatically resumes and accepts the connection.
- A connection attempt that doesn't include valid credentials still causes the DB instance to resume.
- If you connect through the writer endpoint, Aurora resumes the writer DB instance if it's auto-paused. At the same time, Aurora resumes any auto-paused reader instances that have failover priority 0 or 1, meaning their capacity is tied to the capacity of the writer instance.
- If you connect through the reader endpoint, Aurora chooses a reader instance randomly. If that reader instance is paused, Aurora resumes it. Aurora also resumes the writer instance first, because the writer instance must always be active if any reader instances are active. When Aurora resumes that writer instance, that also causes any reader instances in failover promotion tiers zero and one to resume.
- If you send a request to your cluster through the RDS Data API, Aurora resumes the writer instance if it's paused. Then Aurora processes the Data API request.
- When you change the value of a configuration parameter in a DB cluster parameter group, Aurora automatically resumes any paused Aurora serverless instances in all clusters that use that cluster parameter group. Similarly, when you change a parameter value in a DB parameter group, Aurora automatically resumes any paused Aurora serverless instances that use that DB parameter group. The same automatic resume behavior applies when you modify a cluster to assign a different cluster parameter group, or when you modify an instance to assign a different DB parameter group.

- Performing a backtrack request automatically resumes the Aurora serverless writer instance if it's paused. Aurora processes the backtrack request after the writer instance resumes. You can backtrack to a time during which an Aurora serverless instance was paused.
- Taking a cluster snapshot or deleting a snapshot doesn't cause any Aurora serverless instances to resume.
- Creating an Aurora clone causes Aurora to resume the writer instance of the cluster that's being cloned.
- If a paused instance receives a large number of connection requests before it finishes resuming, some sessions might be unable to connect. We recommend implementing retry logic for connections to Aurora clusters that have some Aurora serverless instances with auto-pause enabled. For example, you might retry any failed connection three times.
- Aurora can perform some types of minor internal maintenance without waking up an instance. However, some types of maintenance that happen during the cluster's maintenance window do require Aurora to resume the instance. When the maintenance is finished, the instance is automatically paused again if there's no more activity after the specified interval.

> **Note**
>
> Aurora doesn't automatically resume a paused instance for engine-specific scheduled jobs, such as those in the PostgreSQL `pg_cron` extension or the MySQL event scheduler. To ensure that such jobs run, initiate a connection manually to the instance before the scheduled time. Aurora doesn't queue any jobs where the scheduled time occurs while the DB instance is paused. Such jobs are skipped when the instance resumes later.

- If the Aurora cluster undergoes a failover while an Aurora serverless instance is auto-paused, Aurora might resume an instance and then promote that instance to be the writer. The same might happen if one or more DB instances are removed from the cluster while an instance is paused. In this case, the instance becomes the writer immediately when it's resumed.
- Operations that change properties of the cluster also cause any auto-paused Aurora serverless instances to resume. For example, an auto-paused instance resumes for operations such as the following:
  - Changing the scaling range of the cluster.
  - Upgrading the engine version of the cluster.

- Describing or downloading log files from a paused instance. You can examine historical log data from paused instances by enabling log uploads to CloudWatch and analyzing the logs through CloudWatch.

Turning off auto-pause for Aurora serverless instances in a cluster

Follow the procedure in Setting the Aurora serverless capacity range for a cluster. For the minimum capacity, choose a value of 0.5 or greater. When you turn off the auto-pause feature, the interval for the instance to be idle is reset. If you turn auto-pause on again, you specify a new timeout interval.

The following CLI example shows how you might turn off the auto-pause feature for an existing Aurora cluster. The `describe-db-clusters` output shows that the `SecondsUntilAutoPause` attribute is removed when the minimum capacity is set to a nonzero value.

```
aws rds modify-db-cluster --db-cluster-identifier serverless-v2-cluster \
  --serverless-v2-scaling-configuration MinCapacity=2,MaxCapacity=80

aws rds describe-db-clusters --db-cluster-identifier serverless-v2-cluster \
  --query 'DBClusters[*].ServerlessV2ScalingConfiguration|[0]'
{
    "MinCapacity": 2,
    "MaxCapacity": 80.0
}
```

How the Aurora serverless auto-pause feature works

You can use the following information to plan your usage of the auto-pause feature. Understanding the circumstances where instances pause, resume, or stay active can help you balance the tradeoffs between availability, responsiveness, and cost savings.

Topics

- What happens when Aurora serverless instances pause
- What happens when auto-paused Aurora serverless instances resume
- How instance billing works for auto-paused Aurora serverless clusters
- Situations where Aurora serverless doesn't auto-pause
- How auto-pause works with the cluster stop/start feature

- How maintenance and upgrades work for auto-paused Aurora serverless clusters

What happens when Aurora serverless instances pause

When an Aurora serverless DB instance pauses after a period with no connections:

- Aurora begins pausing the instance after the specified interval elapses with no connections to the instance, regardless of how many ACUs the instance has at the time.
- The pause mechanism isn't instantaneous. An Aurora serverless instance that's about to be auto-paused might wait briefly to catch up with all the changes to Aurora storage.
- The instance charges for that instance are put on hold. The `ServerlessV2Usage` metric has a value of 0 while the instance is paused.
- The status value for the instance doesn't change. The status is still shown as "available".
- The instance stops writing to the database log files. It stops sending metrics to CloudWatch, other than registering zero percent for `CPUUtilization` and `ACUUtilization`, and zero for `ServerlessDatabaseCapacity`.
- Aurora emits events when an Aurora serverless DB instance begins pausing, finishes pausing, and if the pause mechanism is interrupted or is unsuccessful. For details about these events, see DB instance events.

What happens when auto-paused Aurora serverless instances resume

When an Aurora serverless DB instance resumes after being automatically paused, the following conditions apply:

- Any parameter changes that are in `pending-reboot` changes are applied when the instance resumes.
- Aurora emits instance-level events when each Aurora serverless DB instance begins resuming, finishes resuming, and if the instance can't resume for some reason. For details about these events, see DB instance events.
- Any requested connections are established after the DB instance finishes resuming. Because the typical time to resume might be approximately 15 seconds, we recommend that you adjust any client timeout settings to be longer than 15 seconds. For example, in your JDBC driver settings you might adjust the values for the `connectTimeout` and `sslResponseTimeout` settings to be longer than 15 seconds.

> **Note**
>
> If an Aurora serverless instance remains paused more than 24 hours, Aurora can put the instance into a deeper sleep that takes longer to resume. In that case, the resume time can be 30 seconds or longer, roughly equivalent to doing a reboot of the instance. If your database has periods of inactivity that last longer than a day, we recommend setting connection timeouts to 30 seconds or more.

How instance billing works for auto-paused Aurora serverless clusters

While an Aurora serverless instance is auto-paused, its instance charge is zero. The `ServerlessV2Usage` metric is zero during that period. Amazon still charges for Aurora storage and other aspects of the cluster that aren't tied to that specific DB instance.

Situations where Aurora serverless doesn't auto-pause

- If the minimum capacity value for your DB cluster is higher than zero ACUs, the Aurora serverless instances in the cluster don't automatically pause. If you have existing clusters with Aurora serverless instances from before the auto-pause feature was available, the lowest minimum capacity setting was 0.5 ACUs. To use the auto-pause feature with such clusters, modify the minimum capacity setting to zero ACUs.
- If any user-initiated connections are open to an Aurora serverless instance, the instance won't pause. The instance also won't pause while activities such as patching and upgrades are in progress. Administrative connections that Aurora uses for health checks aren't counted as activity and don't prevent the instance from pausing.
- In an Aurora PostgreSQL cluster has logical replication enabled, or an Aurora MySQL cluster that has binlog replication enabled, the writer instance and any reader instances in failover promotion tiers zero and one don't automatically pause. Aurora performs a constant minimal amount of activity for checking the health of the replication connection.

  For clusters with replication enabled, you can still have Aurora reader instances in the source cluster that auto-pause. To do so, set their failover priority to a value other than zero or one. That way, they can be paused independently of the writer instance.
- If your Aurora cluster has an associated RDS Proxy, the proxy maintains an open connection to each DB instance in the cluster. Thus, any Aurora serverless instances in such a cluster won't automatically pause.

- If your cluster is the primary cluster in an Aurora global database, Aurora doesn't automatically pause the Aurora serverless writer instance. That's because a constant level of activity is needed on the writer instance to manage the other clusters in the global database. Because the writer instance remains active, any Aurora serverless reader instances with failover priority zero or one also don't auto-pause.
- Aurora serverless instances in the secondary clusters of an Aurora Global Database don't automatically pause. If a DB cluster is promoted to a standalone cluster, then the auto-pause feature becomes effective if all the other conditions are met.
- In a cluster with an associated zero-ETL integration to Redshift, the writer instance and any reader instances in failover promotion tiers zero and one don't automatically pause.
- In addition to activity on the main database port for the instance, if an Aurora PostgreSQL instance has the Babelfish feature enabled, any connections and activity on the T-SQL port prevent the instance from being auto-paused.

How auto-pause works with the cluster stop/start feature

You can stop and start an Aurora cluster when the auto-pause feature is enabled. It doesn't matter if some instances are paused. When you start the cluster again, any paused Aurora serverless instances are automatically resumed.

While an Aurora cluster is stopped, any paused Aurora serverless instances don't automatically resume based on attempts to connect. Once the cluster is started again, the usual mechanisms for pausing and resuming Aurora serverless instances apply.

How maintenance and upgrades work for auto-paused Aurora serverless clusters

- While an Aurora serverless instance is auto-paused, if you attempt to upgrade the Aurora cluster, Aurora resumes the instance and upgrades it.
- Aurora periodically resumes any auto-paused Aurora serverless instances to perform maintenance such as minor version upgrades and changes to properties such as parameter groups.
- After an Aurora serverless instance wakes up for an administrative operation such as an upgrade or applying maintenance, Aurora waits at least 20 minutes before pausing that instance again. That's to allow any background operations to finish. The twenty-minute period also avoids pausing and resuming the instance multiple times if the instance undergoes multiple administrative operations in succession.

How Aurora serverless auto-pause works for different types of Aurora clusters

The considerations for the auto-pause feature depend on how many instances are in your Aurora cluster, the failover promotion tiers of the reader instances, and whether all the instances are Aurora serverless or a combination of Aurora serverless and provisioned.

Topics

- Recommended Aurora cluster layouts when using auto-pause
- How Aurora serverless auto-pause works for the writer instance in a DB cluster
- How Aurora serverless auto-pause works for multi-AZ clusters
- How Aurora serverless auto-pause works for clusters with provisioned instances

Recommended Aurora cluster layouts when using auto-pause

When the auto-pause feature is enabled, you can arrange your Aurora cluster for the right balance of high availability, fast response, and scalability to suit your use case. You do so by choosing the combination of Aurora serverless instances, provisioned instances, and failover promotion tiers for the DB instances in your cluster.

The following types of configurations demonstrate different tradeoffs between high availability and cost optimization for your cluster:

- For a development and test system, you can set up a single-AZ DB cluster with an Aurora serverless DB instance. The single instance serves all read and write requests. When the cluster isn't used for significant intervals of time, the DB instance pauses. At that point, the DB compute costs for your cluster are also paused.
- For a system running an application where high availability is a priority, but the cluster still has periods where it's entirely idle, you can set up a multi-AZ cluster where both the writer and reader DB instances are Aurora serverless. Set the reader instance to failover priority zero or one, so that the writer and reader instance both pause and resume at the same time. Now you get the benefit of fast failover while the cluster is active. When the cluster remains idle for longer than the auto-pause threshold, the DB instance charges for both of the instances are paused. When the cluster resumes processing, the first database session takes a brief time to connect.
- Suppose your cluster is constantly active with some minimal amount of activity, and requires fast response for any connection. In that case, you can create a cluster with more than one Aurora

serverless reader instance, and decouple the capacities of some reader instances from the writer. Specify failover priority zero or one for the writer instance and one reader instance. Specify a priority greater than one for the other reader instances. That way, the reader instances in the higher priority tiers can auto-pause, even while the writer and one of the readers remain active.

In this case, you can employ some other techniques to ensure that the cluster stays continuously available while still scaling down to a low capacity during idle periods:

- You can use provisioned instances for the writer and the priority 0 or 1 reader. That way, two DB instances never auto-pause and are always available to serve database traffic and to perform failovers.
- You can set up a custom endpoint that includes the Aurora serverless instances in the higher priority tiers, but not the writer or the promotion tier 0 or 1 readers. That way, you can direct read-only sessions that aren't sensitive to latency to the readers that might be auto-paused. You can avoid using the reader endpoint for such requests, because Aurora might direct reader endpoint connections to the always-awake reader instance, or to one of the auto-paused instances. Using the custom endpoint lets you direct connections to different groups of instances based on your preference for fast response or extra scaling capacity.

How Aurora serverless auto-pause works for the writer instance in a DB cluster

When an Aurora DB cluster contains only a single DB instance, the mechanism for auto-pausing and resuming the DB instance is straightforward. It depends only on activity on the writer instance. You might have such a configuration for clusters used for development and testing, or for running applications where high availability isn't crucial. Note that in a single-instance cluster, Aurora directs connections through the reader endpoint to the writer DB instance. Thus, for a single-instance DB cluster, attempting to connect to the reader endpoint causes the auto-paused writer DB instance to resume.

The following additional factors apply to Aurora clusters with multiple DB instances:

- Within an Aurora DB cluster, the writer DB instance is typically accessed frequently. Therefore, you might find that the writer DB instance remains active even while one or more of the reader DB instances automatically pauses.
- Certain activities on the reader DB instances require that writer DB instance to be available. Therefore, the writer DB instances can't be paused until all the reader instances are also paused. Resuming any reader instance automatically resumes the writer instance, even if your application isn't accessing the writer instance directly.

- Aurora serverless reader instances in failover promotion tiers zero and one scale to keep their capacity in synch with the writer instance. Thus, when an Aurora serverless writer instance resumes, so do any Aurora serverless reader instances that are in promotion tiers zero or one.

How Aurora serverless auto-pause works for multi-AZ clusters

Within an Aurora DB cluster containing both a writer and one or more reader DB instances, some Aurora serverless DB instances might be paused while other DB instances are active. The writer instance and any reader instances with failover priority 0 and 1 always pause and resume all at the same time. Reader instances with priority other than 0 or 1 can pause and resume independently of the other instances.

When you use this feature for clusters with multiple reader instances, you can manage costs without sacrificing high availability. The writer instance and another one or two reader instances can remain active at all times, while additional reader instances can pause when they're not needed to handle high-volume read traffic.

Whether a reader instance can automatically pause depends on whether its capacity can scale independently, or whether the capacity is tied to that of the writer DB instance. That scaling property depends on the failover priority of the reader DB instance. When the priority of the reader is zero or one, the capacity of the reader tracks the capacity of the writer DB instance. Therefore, to allow reader DB instances to automatically pause in the broadest range of situations, set their priority to a value higher than one.

The time to resume a reader instance might be slightly longer than to resume a writer instance. For the fastest response if instances might be paused, connect to the cluster endpoint.

How Aurora serverless auto-pause works for clusters with provisioned instances

Any provisioned DB instances in your Aurora DB cluster won't automatically pause. Only Aurora serverless DB instances, with the `db.serverless` instance class, can use the auto-pause feature.

When your Aurora cluster contains any provisioned DB instances, any Aurora serverless writer instance doesn't automatically pause. That's because of the requirement that the writer instance remains available while any reader instances are active. The fact that the Aurora serverless writer remains active also means that any Aurora serverless reader instances with failover priority 0 and 1 won't auto-pause in a hybrid cluster containing any provisioned instances.

Monitoring Aurora clusters that use auto-pause

To monitor Aurora, you should already be familiar with the monitoring procedures in Monitoring Amazon Aurora metrics with Amazon CloudWatch and the CloudWatch metrics listed in Metrics reference for Amazon Aurora. Be aware that there are some special considerations when you monitor Aurora clusters that use the auto-pause feature:

- There can be periods of time when Aurora serverless instances aren't recording log data and most metrics because the instances are paused. The only metrics sent to CloudWatch while an instance is paused are zero percent for `CPUUtilization` and `ACUUtilization`, and zero for `ServerlessDatabaseCapacity`.
- You can check whether Aurora serverless instances are pausing more or less frequently than you expect. To do so, check how often the `ServerlessDatabaseCapacity` metric changes from a nonzero value to zero, and how long it stays zero. If the instances don't remain paused as long as you expect, you don't save as much as you could on costs. If the instances pause and resume more frequently than you intend, your cluster might have unnecessary latency when responding to connection requests. For information about the factors that affect whether and how often Aurora serverless instances can pause, see Prerequisites and Limitations for the Aurora serverless auto-pause feature, Situations where Aurora serverless doesn't auto-pause, and Troubleshooting for Aurora serverless auto-pause.
- You can also examine a log file that records automatic pause and resume operations for an Aurora serverless instance. If an instance didn't pause after the timeout interval expired, this log file also includes the reason why auto-pause didn't happen. For more information, see Monitoring Aurora serverless pause and resume activity.

Topics

- Checking if an Aurora serverless instance is paused
- Events for auto-pause and auto-resume operations
- How auto-pause works with Performance Insights and Enhanced Monitoring
- How the Aurora serverless auto-pause feature interacts with Aurora metrics

Checking if an Aurora serverless instance is paused

To determine whether an Aurora serverless instance is in the paused state, you can observe the `ACUUtilization` metric for the instance. That metric has a value of zero while the instance is paused.

While an Aurora serverless instance is paused, its status value is still listed as **Available**. The same applies while a paused Aurora serverless instance is in the process of resuming. That's because you can successfully connect to such an instance, even if the connection experiences a slight delay.

Any metrics related to the availability of Aurora instances consider the period while the instance is paused as time that the instance was available.

Events for auto-pause and auto-resume operations

Aurora emits events for Aurora serverless instances when auto-pause and auto-resume operations start, finish, or are cancelled. The events related to the auto-pause feature are `RDS-EVENT-0370` through `RDS-EVENT-0374`. For details about these events, see DB instance events.

How auto-pause works with Performance Insights and Enhanced Monitoring

While an Aurora serverless instance is paused, Aurora doesn't collect monitoring information for that instance through either Performance Insights or Enhanced Monitoring. When the instance is resumed, there might be a brief delay before Aurora resumes collecting such monitoring information.

How the Aurora serverless auto-pause feature interacts with Aurora metrics

While an Aurora serverless instance is paused, it doesn't emit most CloudWatch metrics or write any information to its database logs. The only metrics sent to CloudWatch while an instance is paused are zero percent for `CPUUtilization` and `ACUUtilization`, and zero for `ServerlessDatabaseCapacity`.

When CloudWatch is computing statistics related to instance or cluster availability and uptime, Aurora serverless instances are considered to be available during the time that they're paused.

When you initiate an Amazon CLI or RDS API action to describe or download the logs for a paused Aurora serverless instance, the instance resumes automatically to make the log information available.

Example of CloudWatch metrics

The following Amazon CLI examples show how you might observe the capacity of an instance changing over time. During the time period, the instance auto-pauses and then resumes. While it's paused, the `ServerlessDatabaseCapacity` metric reports a value of zero. To determine whether the instance was paused at any point during the time period, we check if the minimum capacity during that time period was zero.

The following Linux example represents an Aurora serverless instance that has been automatically paused for some time. We sample the `ServerlessDatabaseCapacity` each minute, over a period of three minutes. The minimum ACU value of 0.0 confirms that the instance was paused at some point during each minute.

```
$ aws cloudwatch get-metric-statistics \
  --metric-name "ServerlessDatabaseCapacity" \
  --start-time "$(date -d '3 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --statistics Minimum \
  --namespace "AWS/RDS" --dimensions Name=DBInstanceIdentifier,Value=my-autopause-
instance \
  --output text | sort -k 3

ServerlessDatabaseCapacity
DATAPOINTS 0.0 2024-08-02T22:11:00+00:00 None
DATAPOINTS 0.0 2024-08-02T22:12:00+00:00 None
DATAPOINTS 0.0 2024-08-02T22:13:00+00:00 None
```

Next, we attempt to make a connection to the paused Aurora serverless instance. In this example, we intentionally use an incorrect password so that the connection attempt doesn't succeed. Despite the failure, the connection attempt causes Aurora to resume the paused instance.

```
$ mysql -h my_cluster_endpoint.rds.amazonaws.com -u admin -pwrong-password

ERROR 1045 (28000): Access denied for user 'admin'@'ip_address' (using password: YES)
```

The following Linux example demonstrates that the paused instance resumed, remained idle for approximately five minutes, and then went back into its paused state. The instance resumed at a capacity of 2.0 ACUs. Then it scaled up slightly, for example to perform some internal cleanup.

Because it didn't receive any user connection attempts within the five-minute timeout period, it went from 4.0 ACUs directly into the paused state.

```
$ aws cloudwatch get-metric-statistics \
  --metric-name "ServerlessDatabaseCapacity" \
  --start-time "$(date -d '8 minutes ago')" --end-time "$(date -d 'now')" --period 60 \
  --statistics Minimum \
  --namespace "AWS/RDS" --dimensions Name=DBInstanceIdentifier,Value=my-autopause-
instance \
  --output text | sort -k 3

ServerlessDatabaseCapacity
DATAPOINTS 0.0 2024-08-02T22:13:00+00:00 None
DATAPOINTS 2.0 2024-08-02T22:14:00+00:00 None
DATAPOINTS 3.0 2024-08-02T22:15:00+00:00 None
DATAPOINTS 3.0 2024-08-02T22:16:00+00:00 None
DATAPOINTS 4.0 2024-08-02T22:17:00+00:00 None
DATAPOINTS 4.0 2024-08-02T22:18:00+00:00 None
DATAPOINTS 4.0 2024-08-02T22:19:00+00:00 None
DATAPOINTS 0.0 2024-08-02T22:20:00+00:00 None
```

If the report was intended to show how quickly the instance scaled up to handle the workload, we might specify `Maximum` for the statistic instead of `Minimum`. For capacity planning and cost estimation, we might specify a longer time period and use the `Average` statistic. That way, we could determine typical capacity values during periods of high activity, low activity, and paused state. To examine behavior during the precise times around pausing and resuming, we might specify a period of one second and examine a shorter time interval. The timestamp values in the output, such as `2024-08-02T22:13:00+00:00`, demonstrate the format to specify precise parameters for the `--start-time` and `--end-time` options.

Troubleshooting for Aurora serverless auto-pause

If you find that Aurora serverless instances aren't pausing as often as you expect, check for the following possible causes:

- Confirm that the Aurora version you're running does support a minimum capacity of zero ACUs. For the capacity ranges of different Aurora versions, see Aurora serverless capacity.
- Confirm that the minimum capacity value for the cluster is set to zero ACUs.

- Confirm that the instance in question is actually using the Aurora serverless instance class `db.serverless`, not one of the provisioned instance classes.
- Confirm that the cluster isn't using any of the incompatible features or settings from Prerequisites and Limitations for the Aurora serverless auto-pause feature.
- Examine the log file showing when Aurora serverless instances were paused, resumed, or Aurora wasn't able to pause or resume an instance for some reason. For more information, see Monitoring Aurora serverless pause and resume activity.
- Check if any clients or applications are keeping connections open for long periods of time. Conversely, check if any applications that use RDS Data API or Lambda functions are sending frequent requests so that the instance is never idle long enough to pause. You can examine the CloudWatch metrics such as `ConnectionAttempts` and `DatabaseConnections`. For more information, see Instance-level metrics for Amazon Aurora.
- If a reader instance rarely if ever pauses, check its failover priority. If the reader is used for read scaling and not as a standby in case of failover, set it to a priority in the range 2-15.
- If the writer instance rarely if ever pauses, check your usage of the reader instances. The writer can only pause if the entire cluster is idle. That's because a connection to any reader instance causes the writer to resume.
- If your application receives timeouts during connection requests while Aurora serverless instances are resuming, consider lengthening the timeout interval used by your application code or the underlying database framework. Longer connection timeouts reduce the possibility of failed connections while Aurora serverless instances are resuming. However, the longer timeouts can also make your application slower to detect availability issues in your cluster.

  Conversely, consider lengthening the auto-pause interval so that applications don't encounter paused instances as often.

  If there isn't a logical balance between the auto-pause behavior and cluster responsiveness for your application, that cluster might not be a good candidate for using the auto-pause feature.
- If you estimate how long your Aurora serverless instances will be paused, be aware that there are factors that make it impractical to make precise predictions.
  - Instances might resume periodically to perform maintenance, minor version upgrades, or apply changes to parameter groups.
  - For multi-AZ clusters, there are situations where resuming one instance causes other instances to resume also. Resuming any reader always causes the writer to resume. Resuming the writer always causes any readers with failover priority 0 and 1 to resume.

We recommend measuring the actual paused time over a period of several days, with a realistic workload. Then use those measurements to set a baseline for what proportion of time you can expect an instance to be paused.

- You might find that internal operations such as MySQL purge, MySQL event scheduler, PostgreSQL autovacuum, or PostgreSQL jobs scheduled through the `pg_cron` extension aren't running or aren't completing. The instance doesn't automatically resume to perform such operations that don't involve a user connection to the database. If such internal operations are underway when the auto-pause timeout expires, maintenance tasks such as MySQL purge and PostgreSQL autovacuum are canceled. Scheduled jobs from the MySQL event scheduler or the PostgreSQL `pg_cron` extension are also canceled if they're in progress when Aurora initiates the pause operation.

  If you need to ensure that the instance is periodically awake to perform scheduled operations, you can initiate a connection to resume the instance before the start time of the job. You can also increase the auto-pause timeout interval so that operations such as autovacuum can run for longer after user activity is finished. You can also use mechanisms such as Lambda functions to perform database operations on a schedule, in a way that automatically resumes the instance if necessary.

Application design considerations for the Aurora serverless auto-pause feature

When an Aurora serverless DB instance resumes after being automatically paused, it begins with a relatively small capacity and scales up from there. This starting capacity applies even if the DB instance had some higher capacity immediately before it was automatically paused.

Use this feature with applications that can tolerate an interval of approximately 15 seconds while establishing a connection. That accounts for the typical case where an Aurora serverless instance resumes due to one or a small number of incoming connections. If the instance is paused for longer than 24 hours, the time to resume might be longer.

If you are using Aurora serverless in combination with the Aurora stop/start cluster feature, the resumption time for auto-paused Aurora serverless instances is typically much shorter than the time to start a cluster that's stopped.

When coding connection logic in your application, retry the connection if the first attempt return an error that has a transient cause. (If the error is due to authentication failure, correct the

credentials before retrying.) An error that happens immediately after resuming might be a timeout, or some error related to database limits. Retrying can handle issues in the rarer case where an Aurora serverless instance is resumed due to a high number of simultaneous connection requests. In that case, some connections might take longer than usual to be processed, or might exceed the limit of simultaneous connections on the first attempt.

During application development and debugging, don't leave client sessions or programming tools with connections open to the database. Aurora won't pause an instance if there are any user-initiated connections open, regardless of whether the connections aren't running any SQL statements or transactions. When one Aurora serverless instance in an Aurora cluster can't pause, other instances in the cluster might also be prevented from pausing. For more information, see Situations where Aurora serverless doesn't auto-pause.

Aurora emits events when an Aurora serverless DB instance begins resuming, finishes resuming, and if the instance can't resume for some reason. For details about these events, see DB instance events.

Using the Amazon RDS Data API

By using RDS Data API (Data API), you can work with a web-services interface to your Aurora DB cluster. Data API doesn't require a persistent connection to the DB cluster. Instead, it provides a secure HTTP endpoint and integration with Amazon SDKs. You can use the endpoint to run SQL statements without managing connections.

Users don't need to pass credentials with calls to Data API, because Data API uses database credentials stored in Amazon Secrets Manager. To store credentials in Secrets Manager, users must be granted the appropriate permissions to use Secrets Manager, and also Data API. For more information about authorizing users, see Authorizing access to the Amazon RDS Data API.

You can also use Data API to integrate Amazon Aurora with other Amazon applications such as Amazon Lambda, Amazon AppSync, and Amazon Cloud9. Data API provides a more secure way to use Amazon Lambda. It enables you to access your DB cluster without your needing to configure a Lambda function to access resources in a virtual private cloud (VPC). For more information, see Amazon Lambda, Amazon AppSync, and Amazon Cloud9.

You can enable Data API when you create the Aurora DB cluster. You can also modify the configuration later. For more information, see Enabling the Amazon RDS Data API.

After you enable Data API, you can also use the query editor to run ad hoc queries without configuring a query tool to access Aurora in a VPC. For more information, see Using the Aurora query editor.

Topics

- Region and version availability for the Amazon RDS Data API
- Using IPv6 with Amazon RDS Data API
- Limitations for the Amazon RDS Data API
- Session management with Amazon RDS Data API
- Authorizing access to the Amazon RDS Data API
- Enabling the Amazon RDS Data API
- Creating an Amazon VPC endpoint for the Amazon RDS Data API (Amazon PrivateLink)
- Calling the Amazon RDS Data API
- Using the Java client library for RDS Data API
- Processing Amazon RDS Data API query results in JSON format

- Troubleshooting Amazon RDS Data API
- Logging Amazon RDS Data API calls with Amazon CloudTrail
- Monitoring RDS Data API queries with Performance Insights

Region and version availability for the Amazon RDS Data API

For information about the Regions and engine versions available for Data API, see the following sections.

Cluster type	Region and version availability
Aurora PostgreSQL provisioned and Aurora serverless	Data API with Aurora PostgreSQL Aurora serverless and provisioned
Aurora MySQL provisioned and Aurora serverless	Data API with Aurora MySQL Aurora serverless and provisioned

If you require cryptographic modules validated by FIPS 140-2 when accessing Data API through a command line interface or an API, use a FIPS endpoint. For more information about the available FIPS endpoints, see Federal Information Processing Standard (FIPS) 140-2.

Using IPv6 with Amazon RDS Data API

Amazon RDS Data API supports IPv6 connectivity through dual-stack endpoints. This allows you to connect to Data API using IPv6 addresses while maintaining backward compatibility with IPv4.

IPv6 endpoint support

Data API provides dual-stack endpoints that support both IPv4 and IPv6 connections. These endpoints use the `.aws` domain instead of the traditional `.amazonaws.com` domain.

Available endpoint types

Public dual-stack endpoints

Format: `rds-data.`*`region`*`.api.aws`

Example: `rds-data.us-east-1.api.aws`

FIPS dual-stack endpoints

Format: `rds-data-fips.region.api.aws`

Example: `rds-data-fips.us-east-1.api.aws`

PrivateLink IPv6 endpoints

Available through VPC endpoints with IPv6 support

Allows private IPv6 connectivity within your VPC

Legacy IPv4-only endpoints

The existing `.amazonaws.com` endpoints continue to support IPv4-only connections:

- `rds-data.region.amazonaws.com`
- `rds-data-fips.region.amazonaws.com`

> **Note**
>
> Legacy endpoints remain unchanged to ensure backward compatibility with existing applications.

Using IPv6 endpoints

To use IPv6 with Data API, update your application to use the new dual-stack endpoints. Your application will automatically use IPv6 if available, or fall back to IPv4.

For general guidance on setting up IPv6 in your VPC, see Migrating to IPv6 in the *Amazon VPC User Guide*.

You can configure IPv6 endpoints in two ways:

- **Using environment variable**: Set `AWS_USE_DUALSTACK_ENDPOINT=true` in your IPv6 environment. The Amazon CLI and Amazon SDKs will automatically construct the appropriate `api.aws` endpoints without requiring you to specify endpoint URLs manually.
- **Using explicit endpoint URLs**: Specify the dual-stack endpoint URL directly in your Amazon CLI commands or SDK configuration as shown in the examples below.

Amazon CLI configuration

Configure the Amazon CLI to use IPv6 endpoints by specifying the endpoint URL:

For Linux, macOS, or Unix:

```
aws rds-data execute-statement \
     --endpoint-url https://rds-data.us-east-1.api.aws \
     --resource-arn "arn:aws:rds:us-east-1:123456789012:cluster:my-cluster" \
     --secret-arn "arn:aws:secretsmanager:us-east-1:123456789012:secret:my-secret" \
     --database "mydb" \
     --sql "SELECT * FROM users LIMIT 10"
```

For Windows:

```
aws rds-data execute-statement ^
     --endpoint-url https://rds-data.us-east-1.api.aws ^
     --resource-arn "arn:aws:rds:us-east-1:123456789012:cluster:my-cluster" ^
     --secret-arn "arn:aws:secretsmanager:us-east-1:123456789012:secret:my-secret" ^
     --database "mydb" ^
     --sql "SELECT * FROM users LIMIT 10"
```

Amazon SDK configuration

Configure Amazon SDKs to use dual-stack endpoints:

Python

```
import boto3

 # Create RDS Data API client with IPv6 dual-stack endpoint
 client = boto3.client(
     'rds-data',
     endpoint_url='https://rds-data.us-east-1.api.aws'
 )

 # Execute a SQL statement
 response = client.execute_statement(
     resourceArn='arn:aws:rds:us-east-1:123456789012:cluster:my-cluster',
     secretArn='arn:aws:secretsmanager:us-east-1:123456789012:secret:my-secret',
     database='mydb',
     sql='SELECT * FROM users LIMIT 10'
 )
```

```
print(response['records'])
```

Java

```
import software.amazon.awssdk.services.rdsdata.RdsDataClient;
 import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementRequest;
 import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementResponse;
 import java.net.URI;

 // Create RDS Data API client with IPv6 dual-stack endpoint
 RdsDataClient client = RdsDataClient.builder()
     .endpointOverride(URI.create("https://rds-data.us-east-1.api.aws"))
     .build();

 // Execute a SQL statement
 ExecuteStatementRequest request = ExecuteStatementRequest.builder()
     .resourceArn("arn:aws:rds:us-east-1:123456789012:cluster:my-cluster")
     .secretArn("arn:aws:secretsmanager:us-east-1:123456789012:secret:my-secret")
     .database("mydb")
     .sql("SELECT * FROM users LIMIT 10")
     .build();

 ExecuteStatementResponse response = client.executeStatement(request);
 System.out.println(response.records());
```

JavaScript

```
const { RDSDataClient, ExecuteStatementCommand } = require("@aws-sdk/client-rds-
data");

 // Create RDS Data API client with IPv6 dual-stack endpoint
 const client = new RDSDataClient({
     endpoint: "https://rds-data.us-east-1.api.aws"
 });

 // Execute a SQL statement
 const command = new ExecuteStatementCommand({
     resourceArn: "arn:aws:rds:us-east-1:123456789012:cluster:my-cluster",
     secretArn: "arn:aws:secretsmanager:us-east-1:123456789012:secret:my-secret",
     database: "mydb",
     sql: "SELECT * FROM users LIMIT 10"
 });
```

```
const response = await client.send(command);
console.log(response.records);
```

Using Amazon PrivateLink with IPv6

You can create VPC endpoints for Data API that support IPv6 connectivity within your VPC. For detailed instructions on creating VPC endpoints for Data API, see Creating an Amazon VPC endpoint for the Amazon RDS Data API (Amazon PrivateLink).

When creating a VPC endpoint for IPv6 support, ensure that:

- Your VPC and subnets are configured to support IPv6
- Security groups allow IPv6 traffic on the required ports (typically 443 for HTTPS)
- Network ACLs are configured to allow IPv6 traffic

Migration considerations

When migrating to IPv6 endpoints, consider the following:

- **Gradual migration**: You can migrate applications gradually by updating endpoint URLs one application at a time.
- **Network compatibility**: Ensure your network infrastructure supports IPv6 before migrating.
- **Security policies**: Update security group rules and network ACLs to allow IPv6 traffic if needed.
- **Monitoring**: Update monitoring and logging configurations to handle IPv6 addresses.

> **Note**
>
> **Database connection addresses**: When using IPv6 endpoints for Data API, the underlying database connections and database logs will still show IPv4 addresses. This is expected behavior and does not affect the functionality of your IPv6-enabled applications.

Troubleshooting IPv6 connectivity

If you experience issues with IPv6 connectivity, check the following:

Network configuration

Verify that your network supports IPv6 and that IPv6 routing is configured correctly.

DNS resolution

Ensure that your DNS resolver can resolve AAAA records for the dual-stack endpoints.

Security groups

Update security group rules to allow IPv6 traffic on the required ports (typically 443 for HTTPS).

Client libraries

Verify that your HTTP client libraries support IPv6 and dual-stack connectivity.

Limitations for the Amazon RDS Data API

RDS Data API has the following limitations:

- You can only execute Data API queries on writer instances in a DB cluster. However, writer instances can accept both write and read queries.
- With Aurora global databases, you can enable Data API on both the primary and secondary DB clusters. However, a secondary cluster doesn't have a writer instance until it's promoted to be the primary. Data API requires access to the writer instance for query processing, even for read queries. As a result, read and write queries sent to the secondary cluster fail while it lacks a writer instance. Once a secondary cluster is promoted and has a writer instance available, Data API queries on that DB instance succeed.
- Data API isn't supported on T DB instance classes.
- For Aurora PostgreSQL version 14 and higher databases, Data API only supports `scram-sha-256` for password encryption.
- The response size limit is 1 MiB. If the call returns more than 1 MiB of response data, the call is terminated.

Session management with Amazon RDS Data API

RDS Data API maintains a pool of database connections and reuses them across calls to reduce connection overhead. Before reusing a connection, RDS Data API resets session state. The reset differs by database engine: on PostgreSQL, RDS Data API runs the `DISCARD ALL` statement to

clear session state such as temporary tables, prepared statements, and session-level parameters; on MySQL, RDS Data API resets the connection (equivalent to `COM_RESET_CONNECTION`).

These resets cover session-level attributes that the engine owns, but state created by an extension is not guaranteed to be included. Extensions may not behave in the same manner as other session-level attributes when these cleanups are executed, and their state can persist on the database connection after the reset. Because RDS Data API reuses connections, state left behind by an extension is not limited to the call that created it and can still be present when a later call reuses the same connection.

`dblink` is one example of this behavior: `DISCARD ALL` does not close connections opened by the `dblink` extension, so a named `dblink` connection opened in one call can remain open when the connection is reused. Other extensions that hold resources outside the engine's session state can behave similarly.

If you use extensions with RDS Data API, do not rely on the session reset to release extension-owned state. Create and release that state within the same transaction, using the extension's own teardown function. For `dblink`, close each connection with `dblink_disconnect`.

Authorizing access to the Amazon RDS Data API

Users can invoke Amazon RDS Data API (Data API) operations only if they are authorized to do so. You can give a user permission to use Data API by attaching an Amazon Identity and Access Management (IAM) policy that defines their privileges. You can also attach the policy to a role if you're using IAM roles. An Amazon managed policy, `AmazonRDSDataFullAccess`, includes permissions for Data API.

The `AmazonRDSDataFullAccess` policy also includes permissions for the user to get the value of a secret from Amazon Secrets Manager. Users need to use Secrets Manager to store secrets that they can use in their calls to Data API. Using secrets means that users don't need to include database credentials for the resources that they target in their calls to Data API. Data API transparently calls Secrets Manager, which allows (or denies) the user's request for the secret. For information about setting up secrets to use with Data API, see Storing database credentials in Amazon Secrets Manager.

The `AmazonRDSDataFullAccess` policy provides complete access (through Data API) to resources. You can narrow the scope by defining your own policies that specify the Amazon Resource Name (ARN) of a resource.

For example, the following policy shows an example of the minimum required permissions for a user to access Data API for the DB cluster identified by its ARN. The policy includes the needed permissions to access Secrets Manager and get authorization to the DB instance for the user.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "SecretsManagerDbCredentialsAccess",
            "Effect": "Allow",
            "Action": [
                "secretsmanager:GetSecretValue"
            ],
            "Resource": "arn:aws-cn:secretsmanager:*:*:secret:rds-db-credentials/
*"
        },
        {
            "Sid": "RDSDataServiceAccess",
            "Effect": "Allow",
            "Action": [
                "rds-data:BatchExecuteStatement",
                "rds-data:BeginTransaction",
                "rds-data:CommitTransaction",
                "rds-data:ExecuteStatement",
                "rds-data:RollbackTransaction"
            ],
            "Resource": "arn:aws-cn:rds:us-east-2:111122223333:cluster:prod"
        }
    ]
}
```

We recommend that you use a specific ARN for the "Resources" element in your policy statements (as shown in the example) rather than a wildcard (*).

Working with tag-based authorization

RDS Data API (Data API) and Secrets Manager both support tag-based authorization. *Tags* are key-value pairs that label a resource, such as an RDS cluster, with an additional string value, for example:

- `environment:production`
- `environment:development`

You can apply tags to your resources for cost allocation, operations support, access control, and many other reasons. (If you don't already have tags on your resources and you want to apply them, you can learn more at Tagging Amazon RDS resources.) You can use the tags in your policy statements to limit access to the RDS clusters that are labeled with these tags. As an example, an Aurora DB cluster might have tags that identify its environment as either production or development.

The following example shows how you can use tags in your policy statements. This statement requires that both the cluster and the secret passed in the Data API request have an `environment:production` tag.

Here's how the policy is applied: When a user makes a call using Data API, the request is sent to the service. Data API first verifies that the cluster ARN passed in the request is tagged with `environment:production`. It then calls Secrets Manager to retrieve the value of the user's secret in the request. Secrets Manager also verifies that the user's secret is tagged with `environment:production`. If so, Data API then uses the retrieved value for the user's DB password. Finally, if that's also correct, the Data API request is invoked successfully for the user.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "SecretsManagerDbCredentialsAccess",
            "Effect": "Allow",
            "Action": [
                 "secretsmanager:GetSecretValue"
               ],
```

```
            "Resource": "arn:aws-cn:secretsmanager:*:*:secret:rds-db-credentials/
*",
            "Condition": {
                    "StringEquals": {
                        "aws:ResourceTag/environment": [
                                        "production"
                                       ]
                     }
                }
        },
        {
            "Sid": "RDSDataServiceAccess",
            "Effect": "Allow",
            "Action": [
                  "rds-data:*"
               ],
            "Resource": "arn:aws-cn:rds:us-east-2:111122223333:cluster:*",
            "Condition": {
                    "StringEquals": {
                        "aws:ResourceTag/environment": [
                                        "production"
                                       ]
                     }
                }
         }
     ]
}
```

The example shows separate actions for `rds-data` and `secretsmanager` for Data API and Secrets Manager. However, you can combine actions and define tag conditions in many different ways to support your specific use cases. For more information, see Using identity-based policies (IAM policies) for Secrets Manager.

In the "Condition" element of the policy, you can choose tag keys from among the following:

- `aws:TagKeys`
- `aws:ResourceTag/${TagKey}`

To learn more about resource tags and how to use `aws:TagKeys`, see Controlling access to Amazon resources using resource tags.

> **Note**
>
> Both Data API and Amazon Secrets Manager authorize users. If you don't have permissions for all actions defined in a policy, you get an `AccessDeniedException` error.

Storing database credentials in Amazon Secrets Manager

When you call the Amazon RDS Data API (Data API), you pass credentials for the Aurora DB cluster by using a secret in Secrets Manager. To pass credentials in this way, you specify the name of the secret or the Amazon Resource Name (ARN) of the secret.

To store DB cluster credentials in a secret

1. Use Secrets Manager to create a secret that contains credentials for the Aurora DB cluster.

   For instructions, see Create a database secret in the *Amazon Secrets Manager User Guide*.
2. Use the Secrets Manager console to view the details for the secret you created, or run the `aws secretsmanager describe-secret` Amazon CLI command.

   Note the name and ARN of the secret. You can use them in calls to Data API.

For more information about using Secrets Manager, see the Amazon Secrets Manager User Guide.

To understand how Amazon Aurora manages identity and access management, see How Amazon Aurora works with IAM.

For more information about creating an IAM policy, see Creating IAM Policies in the *IAM User Guide*. For information about adding an IAM policy to a user, see Adding and Removing IAM Identity Permissions in the *IAM User Guide*.

Enabling the Amazon RDS Data API

To use the Amazon RDS Data API (Data API), enable it for your Aurora DB cluster. You can enable Data API when you create or modify the DB cluster.

> **Note**
>
> Whether Data API is available for your cluster depends on your Aurora version, database engine, and Amazon Region. For Aurora, Data API works with clusters that use both provisioned and Aurora serverless instances. To check whether your cluster can use Data API, see Supported Regions and Aurora DB engines for RDS Data API.

Topics


- Enabling RDS Data API when you create a database
- Enabling or disabling RDS Data API on an existing database

Enabling RDS Data API when you create a database

While you are creating a database that supports RDS Data API (Data API), you can enable this feature. The following procedures describe how to do so when you use the Amazon Web Services Management Console, the Amazon CLI, or the RDS API.

Console

To enable Data API when you create a DB cluster, select the **Enable the RDS Data API** checkbox in the **Connectivity** section of the **Create database** page, as in the following screenshot.

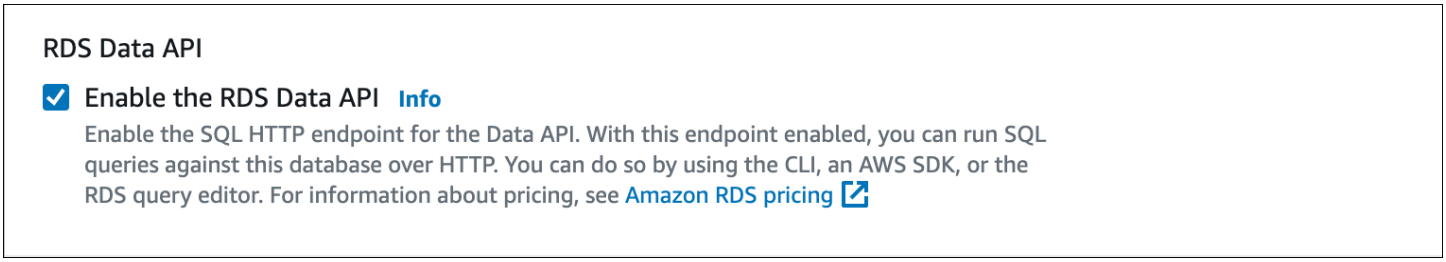

For instructions on how to create an Aurora DB cluster that can use the RDS Data API, see the following:

- For Aurora serverless and provisioned clusters – Creating an Amazon Aurora DB cluster

Amazon CLI

To enable Data API while you're creating an Aurora DB cluster, run the create-db-cluster Amazon CLI command with the `--enable-http-endpoint` option.

The following example creates an Aurora PostgreSQL DB cluster with Data API enabled.

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
     --db-cluster-identifier my_pg_cluster \
     --engine aurora-postgresql \
     --enable-http-endpoint
```

For Windows:

```
aws rds create-db-cluster ^
     --db-cluster-identifier my_pg_cluster ^
     --engine aurora-postgresql ^
     --enable-http-endpoint
```

RDS API

To enable Data API while you're creating an Aurora DB cluster, use the CreateDBCluster operation with the value of the `EnableHttpEndpoint` parameter set to `true`.

Enabling or disabling RDS Data API on an existing database

You can modify a DB cluster that supports RDS Data API (Data API) to enable or disable this feature.

Topics

- Enabling or disabling Data API (Aurora serverless and provisioned)


Enabling or disabling Data API (Aurora serverless and provisioned)

Use the following procedures to enable or disable Data API on Aurora serverless and provisioned databases.

Console

You can enable or disable Data API by using the RDS console for a DB cluster that supports this feature. To do so, open the cluster details page of the database on which you want to enable or disable Data API, and select **Enable RDS Data API** or **Disable RDS Data API** from the **Actions** dropdown menu. This will allow you to enable or disable the RDS Data API for your cluster.

The following screenshot shows that the **RDS Data API** isn't enabled.

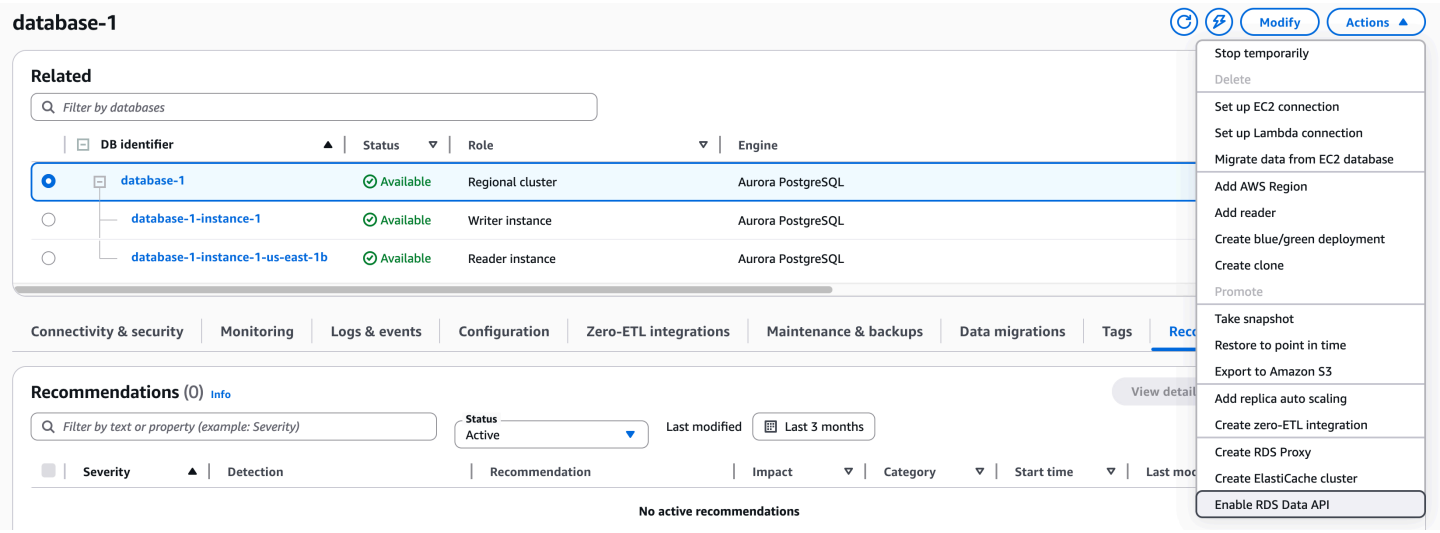

Amazon CLI

To enable or disable Data API on an existing database, run the enable-http-endpoint or disable-http-endpoint Amazon CLI command, and specify the ARN of your DB cluster.

The following example enables Data API.

For Linux, macOS, or Unix:

```
aws rds enable-http-endpoint \
     --resource-arn cluster_arn
```

For Windows:

```
aws rds enable-http-endpoint ^
     --resource-arn cluster_arn
```

RDS API

To enable or disable Data API on an existing database, use the EnableHttpEndpoint and DisableHttpEndpoint operations.

Creating an Amazon VPC endpoint for the Amazon RDS Data API (Amazon PrivateLink)


Amazon VPC enables you to launch Amazon resources, such as Aurora DB clusters and applications, into a virtual private cloud (VPC). Amazon PrivateLink provides private connectivity between VPCs and Amazon services with high security on the Amazon network. Using Amazon PrivateLink, you can create Amazon VPC endpoints, which enable you to connect to services across different accounts and VPCs based on Amazon VPC. For more information about Amazon PrivateLink, see VPC Endpoint Services (Amazon PrivateLink) in the *Amazon Virtual Private Cloud User Guide*.

You can call RDS Data API (Data API) with Amazon VPC endpoints. Using an Amazon VPC endpoint keeps traffic between applications in your Amazon VPC and Data API in the Amazon network, without using public IP addresses. Amazon VPC endpoints can help you meet compliance and regulatory requirements related to limiting public internet connectivity. For example, if you use an Amazon VPC endpoint, you can keep traffic between an application running on an Amazon EC2 instance and Data API in the VPCs that contain them.

After you create the Amazon VPC endpoint, you can start using it without making any code or configuration changes in your application.

To create an Amazon VPC endpoint for Data API

1. Sign in to the Amazon Web Services Management Console and open the Amazon VPC console at https://console.amazonaws.cn/vpc/.
2. Choose **Endpoints**, and then choose **Create Endpoint**.
3. On the **Create Endpoint** page, for **Service category**, choose **Amazon services**. For **Service Name**, choose **rds-data**.

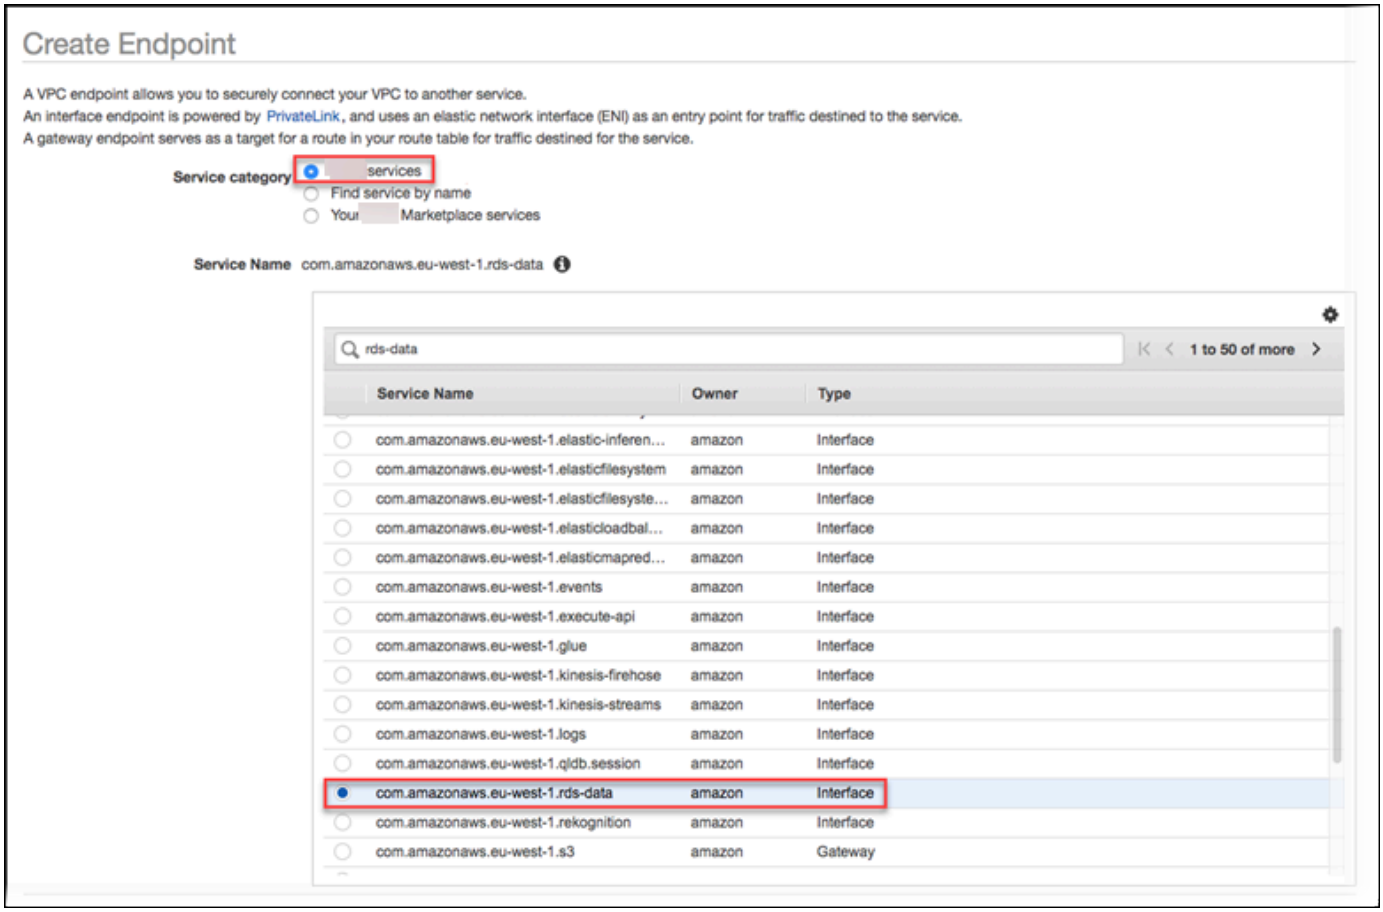

4. For **VPC**, choose the VPC to create the endpoint in.

   Choose the VPC that contains the application that makes Data API calls.

5. For **Subnets**, choose the subnet for each Availability Zone (AZ) used by the Amazon service that is running your application.



To create an Amazon VPC endpoint, specify the private IP address range in which the endpoint will be accessible. To do this, choose the subnet for each Availability Zone. Doing so restricts the VPC endpoint to the private IP address range specific to each Availability Zone and also creates an Amazon VPC endpoint in each Availability Zone.

6. For **Enable DNS name**, select **Enable for this endpoint**.



   Private DNS resolves the standard Data API DNS hostname (`https://rds-data.`*`region`*`.amazonaws.com`) to the private IP addresses associated with the DNS hostname specific to your Amazon VPC endpoint. As a result, you can access the Data API VPC endpoint using the Amazon CLI or Amazon SDKs without making any code or configuration changes to update Data API's endpoint URL.

7. For **Security group**, choose a security group to associate with the Amazon VPC endpoint.


   Choose the security group that allows access to the Amazon service that is running your application. For example, if an Amazon EC2 instance is running your application, choose the security group that allows access to the Amazon EC2 instance. The security group enables you to control the traffic to the Amazon VPC endpoint from resources in your VPC.

8. For **Policy**, choose **Full Access** to allow anyone inside the Amazon VPC to access the Data API through this endpoint. Or choose **Custom** to specify a policy that limits access.


   If you choose **Custom**, enter the policy in the policy creation tool.

9. Choose **Create endpoint**.

After the endpoint is created, choose the link in the Amazon Web Services Management Console to view the endpoint details.

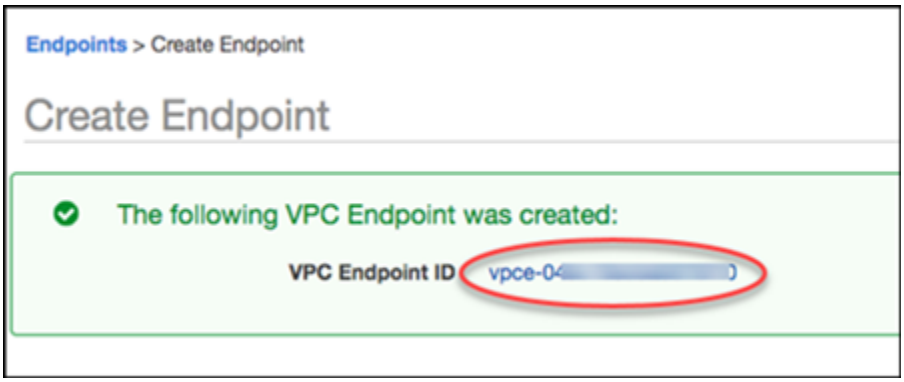

The endpoint **Details** tab shows the DNS hostnames that were generated while creating the Amazon VPC endpoint.

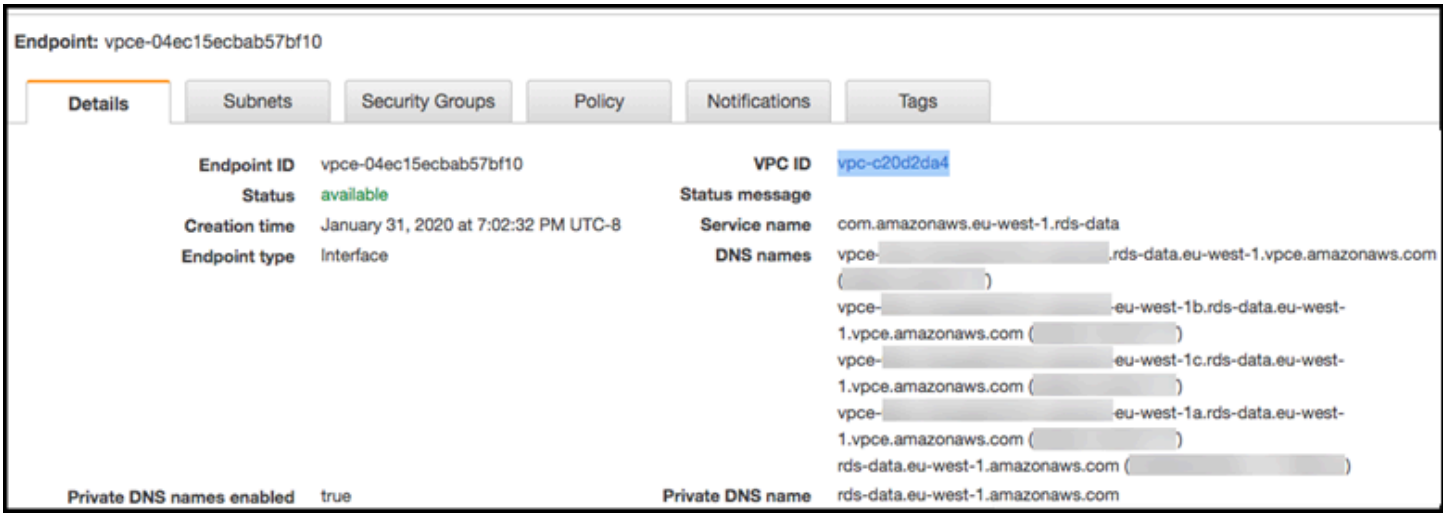

You can use the standard endpoint (`rds-data.`*`region`*`.amazonaws.com`) or one of the VPC-specific endpoints to call the Data API within the Amazon VPC. The standard Data API endpoint automatically routes to the Amazon VPC endpoint. This routing occurs because the Private DNS hostname was enabled when the Amazon VPC endpoint was created.

When you use an Amazon VPC endpoint in a Data API call, all traffic between your application and Data API remains in the Amazon VPCs that contain them. You can use an Amazon VPC endpoint for any type of Data API call. For information about calling Data API, see Calling the Amazon RDS Data API.

Calling the Amazon RDS Data API

With the Amazon RDS Data API (Data API) enabled on your Aurora DB cluster, you can run SQL statements on the Aurora DB cluster by using Data API or the Amazon CLI. Data API supports the programming languages supported by the Amazon SDKs. For more information, see Tools to build on Amazon.

Topics

- Amazon RDS Data API operations reference
- Calling the Amazon RDS Data API with the Amazon CLI
- Calling the Amazon RDS Data API from a Python application
- Calling the Amazon RDS Data API from a Java application
- Controlling Data API timeout behavior

Amazon RDS Data API operations reference

The Amazon RDS Data API provides the following operations to perform SQL statements.

Data API operation	Amazon CLI command	Description
ExecuteStatement	aws rds-data execute-statement	Runs a SQL statement on a database.
BatchExecuteStatement	aws rds-data batch-execute-statement	Runs a batch SQL statement over an array of data for bulk update and insert operations. You can run a data manipulation language (DML) statement with an array of parameter sets. A batch SQL statement can provide a significant performance improvement over individual insert and update statements.

You can use either operation to run individual SQL statements or to run transactions. For transactions, Data API provides the following operations.

Data API operation	Amazon CLI command	Description
BeginTransaction	aws rds-data begin-transaction	Starts a SQL transaction.
CommitTransaction	aws rds-data commit-transaction	Ends a SQL transaction and commits the changes.
RollbackTransaction	aws rds-data rollback-transaction	Performs a rollback of a transaction.

The operations for performing SQL statements and supporting transactions have the following common Data API parameters and Amazon CLI options. Some operations support other parameters or options.

Data API operation parameter	Amazon CLI command option	Required	Description
`resourceArn`	`--resource-arn`	Yes	The Amazon Resource Name (ARN) of the Aurora DB cluster. The cluster must be in the same Amazon Web Services account as the IAM role or user that invokes the Data API. To access a cluster in a different account, assume a role in that account.
`secretArn`	`--secret-arn`	Yes	The name or ARN of the secret that enables access to the DB cluster.

RDS Data API supports the following data types for Aurora MySQL:

- `TINYINT(1)`, `BOOLEAN`, `BOOL`
- `TINYINT`
- `SMALLINT` [`SIGNED` | `UNSIGNED`]
- `MEDIUMINT` [`SIGNED` | `UNSIGNED`]
- `INT` [`SIGNED` | `UNSIGNED`]
- `BIGINT` [`SIGNED` | `UNSIGNED`]
- `FLOAT`
- `DOUBLE`
- `VARCHAR`, `CHAR`, `TEXT`, `ENUM`
- `VARBINARY`, `BINARY`, `BLOB`
- `DATE`, `TIME`, `DATETIME`, `TIMESTAMP`
- `DECIMAL`
- `JSON`

- BIT, BIT(N)

RDS Data API supports following Aurora PostgreSQL scalar types:

- BOOL
- BYTEA
- DATE
- CIDR
- DECIMAL, NUMERIC
- ENUM
- FLOAT8, DOUBLE PRECISION
- INET
- INT, INT4, SERIAL
- INT2, SMALLINT, SMALLSERIAL
- INT8, BIGINT, BIGSERIAL
- JSONB, JSON
- REAL, FLOAT
- TEXT, CHAR(N), VARCHAR, NAME
- TIME
- TIMESTAMP
- UUID
- VECTOR

RDS Data API supports the following Aurora PostgreSQL array types in query results. These array types apply only to values returned when you read array columns from a result set. You can't pass arrays as input parameters: Supplying an `arrayValue` in a `SqlParameter` for `ExecuteStatement` or `BatchExecuteStatement` returns `ValidationException: Array parameters are not supported`. To pass an array as input, provide a Aurora PostgreSQL array literal as a `stringValue` and cast it in SQL (for example, `:myparam::text[]`).

- BOOL[], BIT[]
- DATE[]

- DECIMAL[], NUMERIC[]
- FLOAT8[], DOUBLE PRECISION[]
- INT[], INT4[]
- INT2[]
- INT8[], BIGINT[]
- JSON[]
- REAL[], FLOAT[]
- TEXT[], CHAR(N)[], VARCHAR[], NAME[]
- TIME[]
- TIMESTAMP[]
- UUID[]

You can use parameters in Data API calls to ExecuteStatement and BatchExecuteStatement, and when you run the Amazon CLI commands execute-statement and batch-execute-statement. To use a parameter, you specify a name-value pair in the SqlParameter data type. You specify the value with the Field data type. The following table maps Java Database Connectivity (JDBC) data types to the data types that you specify in Data API calls.

JDBC data type	Data API data type
INTEGER, TINYINT, SMALLINT, BIGINT	LONG (or STRING)
FLOAT, REAL, DOUBLE	DOUBLE
DECIMAL	STRING
BOOLEAN, BIT	BOOLEAN
BLOB, BINARY, LONGVARBINARY, VARBINARY	BLOB
CLOB	STRING
Other types (including types related to date and time)	STRING

> **Note**
>
> You can specify the `LONG` or `STRING` data type in your Data API call for `LONG` values returned by the database. We recommend that you do so to avoid losing precision for extremely large numbers, which can happen when you work with JavaScript.

Certain types, such as `DECIMAL` and `TIME`, require a hint so that Data API passes `String` values to the database as the correct type. To use a hint, include values for `typeHint` in the `SqlParameter` data type. The possible values for `typeHint` are the following:

- `DATE` – The corresponding `String` parameter value is sent as an object of `DATE` type to the database. The accepted format is `YYYY-MM-DD`.
- `DECIMAL` – The corresponding `String` parameter value is sent as an object of `DECIMAL` type to the database.
- `JSON` – The corresponding `String` parameter value is sent as an object of `JSON` type to the database.
- `TIME` – The corresponding `String` parameter value is sent as an object of `TIME` type to the database. The accepted format is `HH:MM:SS[.FFF]`.
- `TIMESTAMP` – The corresponding `String` parameter value is sent as an object of `TIMESTAMP` type to the database. The accepted format is `YYYY-MM-DD HH:MM:SS[.FFF]`.
- `UUID` – The corresponding `String` parameter value is sent as an object of `UUID` type to the database.

> **Note**
>
> Currently, Data API doesn't support arrays of Universal Unique Identifiers (UUIDs).

> **Note**
>
> For Amazon Aurora PostgreSQL, Data API always returns the Aurora PostgreSQL data type `TIMESTAMPTZ` in UTC time zone.

Calling the Amazon RDS Data API with the Amazon CLI

You can call RDS Data API (Data API) using the Amazon CLI.

The following examples use the Amazon CLI for Data API. For more information, see Amazon CLI reference for the Data API.

In each example, replace the Amazon Resource Name (ARN) for the DB cluster with the ARN for your Aurora DB cluster. Also, replace the secret ARN with the ARN of the secret in Secrets Manager that allows access to the DB cluster.

> **Note**
>
> The Amazon CLI can format responses in JSON.

Topics

- Starting a SQL transaction
- Running a SQL statement
- Running a batch SQL statement over an array of data
- Committing a SQL transaction
- Rolling back a SQL transaction

Starting a SQL transaction

You can start a SQL transaction using the `aws rds-data begin-transaction` CLI command. The call returns a transaction identifier.

> **Important**
>
> Within Data API, a transaction times out if there are no calls that use its transaction ID in three minutes. If a transaction times out before it's committed, Data API rolls it back automatically.
> MySQL data definition language (DDL) statements inside a transaction cause an implicit commit. We recommend that you run each MySQL DDL statement in a separate `execute-statement` command with the `--continue-after-timeout` option.

In addition to the common options, specify the `--database` option, which provides the name of the database.

For example, the following CLI command starts a SQL transaction.

For Linux, macOS, or Unix:

```
aws rds-data begin-transaction --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" \
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret"
```

For Windows:

```
aws rds-data begin-transaction --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" ^
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret"
```

The following is an example of the response.

```
{
    "transactionId": "ABC1234567890xyz"
 }
```

Running a SQL statement

You can run a SQL statement using the `aws rds-data execute-statement` CLI command.

You can run the SQL statement in a transaction by specifying the transaction identifier with the `--transaction-id` option. You can start a transaction using the `aws rds-data begin-transaction` CLI command. You can end and commit a transaction using the `aws rds-data commit-transaction` CLI command.

> **Important**
>
> If you don't specify the `--transaction-id` option, changes that result from the call are committed automatically.

In addition to the common options, specify the following options:

- `--sql` (required) – A SQL statement to run on the DB cluster.
- `--transaction-id` (optional) – The identifier of a transaction that was started using the `begin-transaction` CLI command. Specify the transaction ID of the transaction that you want to include the SQL statement in.
- `--parameters` (optional) – The parameters for the SQL statement.
- `--include-result-metadata | --no-include-result-metadata` (optional) – A value that indicates whether to include metadata in the results. The default is `--no-include-result-metadata`.
- `--database` (optional) – The name of the database.

  The `--database` option might not work when you run a SQL statement after running `--sql "use database_name;"` in the previous request. We recommend that you use the `--database` option instead of running `--sql "use database_name;"` statements.
- `--continue-after-timeout | --no-continue-after-timeout` (optional) – A value that indicates whether to continue running the statement after the call exceeds the Data API timeout interval of 45 seconds. The default is `--no-continue-after-timeout`.

  For data definition language (DDL) statements, we recommend continuing to run the statement after the call times out to avoid errors and the possibility of corrupted data structures.
- `--format-records-as "JSON"|"NONE"` – An optional value that specifies whether to format the result set as a JSON string. The default is `"NONE"`. For usage information about processing JSON result sets, see Processing Amazon RDS Data API query results in JSON format.

The DB cluster returns a response for the call.

> **Note**
>
> The response size limit is 1 MiB. If the call returns more than 1 MiB of response data, the call is terminated.

For example, the following CLI command runs a single SQL statement and omits the metadata in the results (the default).

For Linux, macOS, or Unix:

```
aws rds-data execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" \
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" \
 --sql "select * from mytable"
```

For Windows:

```
aws rds-data execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" ^
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" ^
 --sql "select * from mytable"
```

The following is an example of the response.

```
{
    "numberOfRecordsUpdated": 0,
    "records": [
        [
            {
                "longValue": 1
            },
            {
                "stringValue": "ValueOne"
            }
        ],
        [
            {
                "longValue": 2
            },
            {
                "stringValue": "ValueTwo"
            }
        ],
        [
            {
                "longValue": 3
            },
            {
                "stringValue": "ValueThree"
            }
```

```
        ]
    ]
}
```

The following CLI command runs a single SQL statement in a transaction by specifying the `--transaction-id` option.

For Linux, macOS, or Unix:

```
aws rds-data execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" \
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" \
 --sql "update mytable set quantity=5 where id=201" --transaction-id "ABC1234567890xyz"
```

For Windows:

```
aws rds-data execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" ^
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" ^
 --sql "update mytable set quantity=5 where id=201" --transaction-id "ABC1234567890xyz"
```

The following is an example of the response.

```
{
    "numberOfRecordsUpdated": 1
}
```

The following CLI command runs a single SQL statement with parameters.

For Linux, macOS, or Unix:

```
aws rds-data execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" \
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" \
 --sql "insert into mytable values (:id, :val)" --parameters "[{\"name\": \"id\",
 \"value\": {\"longValue\": 1}},{\"name\": \"val\", \"value\": {\"stringValue\":
 \"value1\"}}]"
```

For Windows:

```
aws rds-data execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" ^
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" ^
 --sql "insert into mytable values (:id, :val)" --parameters "[{\"name\": \"id\",
 \"value\": {\"longValue\": 1}},{\"name\": \"val\", \"value\": {\"stringValue\":
 \"value1\"}}]"
```

The following is an example of the response.

```
{
     "numberOfRecordsUpdated": 1
 }
```

The following CLI command runs a data definition language (DDL) SQL statement. The DDL statement renames column `job` to column `role`.

> **Important**
>
> For DDL statements, we recommend continuing to run the statement after the call times out. When a DDL statement terminates before it is finished running, it can result in errors and possibly corrupted data structures. To continue running a statement after a call exceeds the RDS Data API timeout interval of 45 seconds, specify the `--continue-after-timeout` option.

For Linux, macOS, or Unix:

```
aws rds-data execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" \
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" \
 --sql "alter table mytable change column job role varchar(100)" --continue-after-
timeout
```

For Windows:

```
aws rds-data execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" ^
```

```
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" ^
 --sql "alter table mytable change column job role varchar(100)" --continue-after-
timeout
```

The following is an example of the response.

```
{
     "generatedFields": [],
     "numberOfRecordsUpdated": 0
 }
```

> **Note**
>
> The `generatedFields` data isn't supported by Aurora PostgreSQL. To get the values of generated fields, use the `RETURNING` clause. For more information, see Returning data from modified rows in the PostgreSQL documentation.

Running a batch SQL statement over an array of data

You can run a batch SQL statement over an array of data by using the `aws rds-data batch-execute-statement` CLI command. You can use this command to perform a bulk import or update operation.

You can run the SQL statement in a transaction by specifying the transaction identifier with the `--transaction-id` option. You can start a transaction by using the `aws rds-data begin-transaction` CLI command. You can end and commit a transaction by using the `aws rds-data commit-transaction` CLI command.

> **Important**
>
> If you don't specify the `--transaction-id` option, changes that result from the call are committed automatically.

In addition to the common options, specify the following options:

- `--sql` (required) – A SQL statement to run on the DB cluster.

> **Tip**
>
> For MySQL-compatible statements, don't include a semicolon at the end of the `--sql` parameter. A trailing semicolon might cause a syntax error.

- `--transaction-id` (optional) – The identifier of a transaction that was started using the `begin-transaction` CLI command. Specify the transaction ID of the transaction that you want to include the SQL statement in.
- `--parameter-set` (optional) – The parameter sets for the batch operation.
- `--database` (optional) – The name of the database.

The DB cluster returns a response to the call.

> **Note**
>
> There isn't a fixed upper limit on the number of parameter sets. However, the maximum size of the HTTP request submitted through Data API is 4 MiB. If the request exceeds this limit, Data API returns an error and doesn't process the request. This 4 MiB limit includes the size of the HTTP headers and the JSON notation in the request. Thus, the number of parameter sets that you can include depends on a combination of factors, such as the size of the SQL statement and the size of each parameter set.
>
> The response size limit is 1 MiB. If the call returns more than 1 MiB of response data, the call is terminated.

For example, the following CLI command runs a batch SQL statement over an array of data with a parameter set.

For Linux, macOS, or Unix:

```
aws rds-data batch-execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" \
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" \
 --sql "insert into mytable values (:id, :val)" \
 --parameter-sets "[[{\"name\": \"id\", \"value\": {\"longValue\": 1}},{\"name\":
 \"val\", \"value\": {\"stringValue\": \"ValueOne\"}}],
```

```
 [{\"name\": \"id\", \"value\": {\"longValue\": 2}},{\"name\": \"val\", \"value\":
 {\"stringValue\": \"ValueTwo\"}}],
 [{\"name\": \"id\", \"value\": {\"longValue\": 3}},{\"name\": \"val\", \"value\":
 {\"stringValue\": \"ValueThree\"}}]]"
```

For Windows:

```
aws rds-data batch-execute-statement --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" ^
 --database "mydb" --secret-arn "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret" ^
 --sql "insert into mytable values (:id, :val)" ^
 --parameter-sets "[[{\"name\": \"id\", \"value\": {\"longValue\": 1}},{\"name\":
 \"val\", \"value\": {\"stringValue\": \"ValueOne\"}}],
 [{\"name\": \"id\", \"value\": {\"longValue\": 2}},{\"name\": \"val\", \"value\":
 {\"stringValue\": \"ValueTwo\"}}],
 [{\"name\": \"id\", \"value\": {\"longValue\": 3}},{\"name\": \"val\", \"value\":
 {\"stringValue\": \"ValueThree\"}}]]"
```

> **Note**
>
> Don't include line breaks in the `--parameter-sets` option.

Committing a SQL transaction

Using the `aws rds-data commit-transaction` CLI command, you can end a SQL transaction that you started with `aws rds-data begin-transaction` and commit the changes.

In addition to the common options, specify the following option:

- `--transaction-id` (required) – The identifier of a transaction that was started using the `begin-transaction` CLI command. Specify the transaction ID of the transaction that you want to end and commit.

For example, the following CLI command ends a SQL transaction and commits the changes.

For Linux, macOS, or Unix:

```
aws rds-data commit-transaction --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" \
```

```
 --secret-arn "arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:mysecret" \
 --transaction-id "ABC1234567890xyz"
```

For Windows:

```
aws rds-data commit-transaction --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" ^
 --secret-arn "arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:mysecret" ^
 --transaction-id "ABC1234567890xyz"
```

The following is an example of the response.

```
{
     "transactionStatus": "Transaction Committed"
 }
```

Rolling back a SQL transaction

Using the `aws rds-data rollback-transaction` CLI command, you can roll back a SQL transaction that you started with `aws rds-data begin-transaction`. Rolling back a transaction cancels its changes.

> **Important**
>
> If the transaction ID has expired, the transaction was rolled back automatically. In this case, an `aws rds-data rollback-transaction` command that specifies the expired transaction ID returns an error.

In addition to the common options, specify the following option:

- `--transaction-id` (required) – The identifier of a transaction that was started using the `begin-transaction` CLI command. Specify the transaction ID of the transaction that you want to roll back.

For example, the following Amazon CLI command rolls back a SQL transaction.

For Linux, macOS, or Unix:

```
aws rds-data rollback-transaction --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" \
 --secret-arn "arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:mysecret" \
 --transaction-id "ABC1234567890xyz"
```

For Windows:

```
aws rds-data rollback-transaction --resource-arn "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster" ^
 --secret-arn "arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:mysecret" ^
 --transaction-id "ABC1234567890xyz"
```

The following is an example of the response.

```
{
     "transactionStatus": "Rollback Complete"
     }
```

Calling the Amazon RDS Data API from a Python application

You can call the Amazon RDS Data API (Data API) from a Python application.

The following examples use the Amazon SDK for Python (Boto). For more information about Boto, see the Amazon SDK for Python (Boto 3) documentation.

In each example, replace the DB cluster's Amazon Resource Name (ARN) with the ARN for your Aurora DB cluster. Also, replace the secret ARN with the ARN of the secret in Secrets Manager that allows access to the DB cluster.

Topics

- Running a SQL query
- Running a DML SQL statement
- Running a SQL transaction

Running a SQL query

You can run a SELECT statement and fetch the results with a Python application.

The following example runs a SQL query.

```
import boto3

 rdsData = boto3.client('rds-data')

 cluster_arn = 'arn:aws-cn:rds:us-east-1:123456789012:cluster:mydbcluster'
 secret_arn = 'arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:mysecret'

 response1 = rdsData.execute_statement(
             resourceArn = cluster_arn,
             secretArn = secret_arn,
             database = 'mydb',
             sql = 'select * from employees limit 3')

 print (response1['records'])
 [
     [
         {
             'longValue': 1
         },
         {
             'stringValue': 'ROSALEZ'
         },
         {
             'stringValue': 'ALEJANDRO'
         },
         {
             'stringValue': '2016-02-15 04:34:33.0'
         }
     ],
     [
         {
             'longValue': 1
         },
         {
             'stringValue': 'DOE'
         },
         {
             'stringValue': 'JANE'
         },
         {
             'stringValue': '2014-05-09 04:34:33.0'
         }
```

```
    ],
    [
        {
            'longValue': 1
        },
        {
            'stringValue': 'STILES'
        },
        {
            'stringValue': 'JOHN'
        },
        {
            'stringValue': '2017-09-20 04:34:33.0'
        }
    ]
]
```

Running a DML SQL statement

You can run a data manipulation language (DML) statement to insert, update, or delete data in your database. You can also use parameters in DML statements.

> **Important**
>
> If a call isn't part of a transaction because it doesn't include the `transactionID` parameter, changes that result from the call are committed automatically.

The following example runs an insert SQL statement and uses parameters.

```
import boto3

 cluster_arn = 'arn:aws-cn:rds:us-east-1:123456789012:cluster:mydbcluster'
 secret_arn = 'arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:mysecret'

 rdsData = boto3.client('rds-data')


 param1 = {'name':'firstname', 'value':{'stringValue': 'JACKSON'}}
 param2 = {'name':'lastname', 'value':{'stringValue': 'MATEO'}}
 paramSet = [param1, param2]
```

```
response2 = rdsData.execute_statement(resourceArn=cluster_arn,
                                      secretArn=secret_arn,
                                      database='mydb',
                                      sql='insert into employees(first_name,
last_name) VALUES(:firstname, :lastname)',
                                      parameters = paramSet)

print (response2["numberOfRecordsUpdated"])
```

Running a SQL transaction

You can start a SQL transaction, run one or more SQL statements, and then commit the changes with a Python application.

> **Important**
>
> A transaction times out if there are no calls that use its transaction ID in three minutes. If a transaction times out before it's committed, it's rolled back automatically.
> If you don't specify a transaction ID, changes that result from the call are committed automatically.

The following example runs a SQL transaction that inserts a row in a table.

```
import boto3

rdsData = boto3.client('rds-data')

cluster_arn = 'arn:aws-cn:rds:us-east-1:123456789012:cluster:mydbcluster'
secret_arn = 'arn:aws-cn:secretsmanager:us-east-1:123456789012:secret:mysecret'

tr = rdsData.begin_transaction(
     resourceArn = cluster_arn,
     secretArn = secret_arn,
     database = 'mydb')

response3 = rdsData.execute_statement(
     resourceArn = cluster_arn,
     secretArn = secret_arn,
     database = 'mydb',
     sql = 'insert into employees(first_name, last_name) values('XIULAN', 'WANG')',
```

```
      transactionId = tr['transactionId'])

cr = rdsData.commit_transaction(
      resourceArn = cluster_arn,
      secretArn = secret_arn,
      transactionId = tr['transactionId'])

cr['transactionStatus']
'Transaction Committed'

response3['numberOfRecordsUpdated']
1
```

Note

If you run a data definition language (DDL) statement, we recommend continuing to run the statement after the call times out. When a DDL statement terminates before it is finished running, it can result in errors and possibly corrupted data structures. To continue running a statement after a call exceeds the RDS Data API timeout interval of 45 seconds, set the `continueAfterTimeout` parameter to `true`.

Calling the Amazon RDS Data API from a Java application

You can call the Amazon RDS Data API (Data API) from a Java application.

The following examples use the Amazon SDK for Java. For more information, see the Amazon SDK for Java Developer Guide.

In each example, replace the DB cluster's Amazon Resource Name (ARN) with the ARN for your Aurora DB cluster. Also, replace the secret ARN with the ARN of the secret in Secrets Manager that allows access to the DB cluster.

Topics

- Running a SQL query
- Running a SQL transaction
- Running a batch SQL operation

Running a SQL query

You can run a SELECT statement and fetch the results with a Java application.

The following example runs a SQL query.

```
package com.amazonaws.rdsdata.examples;

 import com.amazonaws.services.rdsdata.AWSRDSData;
 import com.amazonaws.services.rdsdata.AWSRDSDataClient;
 import com.amazonaws.services.rdsdata.model.ExecuteStatementRequest;
 import com.amazonaws.services.rdsdata.model.ExecuteStatementResult;
 import com.amazonaws.services.rdsdata.model.Field;

 import java.util.List;

 public class FetchResultsExample {
   public static final String RESOURCE_ARN = "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster";
   public static final String SECRET_ARN = "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret";

   public static void main(String[] args) {
     AWSRDSData rdsData = AWSRDSDataClient.builder().build();

     ExecuteStatementRequest request = new ExecuteStatementRequest()
             .withResourceArn(RESOURCE_ARN)
             .withSecretArn(SECRET_ARN)
             .withDatabase("mydb")
             .withSql("select * from mytable");

     ExecuteStatementResult result = rdsData.executeStatement(request);

     for (List<Field> fields: result.getRecords()) {
       String stringValue = fields.get(0).getStringValue();
       long numberValue = fields.get(1).getLongValue();

       System.out.println(String.format("Fetched row: string = %s, number = %d",
 stringValue, numberValue));
     }
   }
 }
```

Running a SQL transaction

You can start a SQL transaction, run one or more SQL statements, and then commit the changes with a Java application.

> **Important**
>
> A transaction times out if there are no calls that use its transaction ID in three minutes. If a transaction times out before it's committed, it's rolled back automatically.
> If you don't specify a transaction ID, changes that result from the call are committed automatically.

The following example runs a SQL transaction.

```
package com.amazonaws.rdsdata.examples;

 import com.amazonaws.services.rdsdata.AWSRDSData;
 import com.amazonaws.services.rdsdata.AWSRDSDataClient;
 import com.amazonaws.services.rdsdata.model.BeginTransactionRequest;
 import com.amazonaws.services.rdsdata.model.BeginTransactionResult;
 import com.amazonaws.services.rdsdata.model.CommitTransactionRequest;
 import com.amazonaws.services.rdsdata.model.ExecuteStatementRequest;

 public class TransactionExample {
   public static final String RESOURCE_ARN = "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster";
   public static final String SECRET_ARN = "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret";

   public static void main(String[] args) {
     AWSRDSData rdsData = AWSRDSDataClient.builder().build();

     BeginTransactionRequest beginTransactionRequest = new BeginTransactionRequest()
             .withResourceArn(RESOURCE_ARN)
             .withSecretArn(SECRET_ARN)
             .withDatabase("mydb");
     BeginTransactionResult beginTransactionResult =
 rdsData.beginTransaction(beginTransactionRequest);
     String transactionId = beginTransactionResult.getTransactionId();

     ExecuteStatementRequest executeStatementRequest = new ExecuteStatementRequest()
```

```
            .withTransactionId(transactionId)
            .withResourceArn(RESOURCE_ARN)
            .withSecretArn(SECRET_ARN)
            .withSql("INSERT INTO test_table VALUES ('hello world!')");
    rdsData.executeStatement(executeStatementRequest);

    CommitTransactionRequest commitTransactionRequest = new CommitTransactionRequest()
            .withTransactionId(transactionId)
            .withResourceArn(RESOURCE_ARN)
            .withSecretArn(SECRET_ARN);
    rdsData.commitTransaction(commitTransactionRequest);
  }
}
```

Note

If you run a data definition language (DDL) statement, we recommend continuing to run the statement after the call times out. When a DDL statement terminates before it is finished running, it can result in errors and possibly corrupted data structures. To continue running a statement after a call exceeds the RDS Data API timeout interval of 45 seconds, set the `continueAfterTimeout` parameter to `true`.

Running a batch SQL operation

You can run bulk insert and update operations over an array of data with a Java application. You can run a DML statement with array of parameter sets.

Important

If you don't specify a transaction ID, changes that result from the call are committed automatically.

The following example runs a batch insert operation.

```
package com.amazonaws.rdsdata.examples;

 import com.amazonaws.services.rdsdata.AWSRDSData;
 import com.amazonaws.services.rdsdata.AWSRDSDataClient;
 import com.amazonaws.services.rdsdata.model.BatchExecuteStatementRequest;
```

```
import com.amazonaws.services.rdsdata.model.Field;
import com.amazonaws.services.rdsdata.model.SqlParameter;

import java.util.Arrays;

public class BatchExecuteExample {
  public static final String RESOURCE_ARN = "arn:aws-cn:rds:us-
east-1:123456789012:cluster:mydbcluster";
  public static final String SECRET_ARN = "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:mysecret";

  public static void main(String[] args) {
      AWSRDSData rdsData = AWSRDSDataClient.builder().build();

    BatchExecuteStatementRequest request = new BatchExecuteStatementRequest()
            .withDatabase("test")
            .withResourceArn(RESOURCE_ARN)
            .withSecretArn(SECRET_ARN)
            .withSql("INSERT INTO test_table2 VALUES (:string, :number)")
            .withParameterSets(Arrays.asList(
                    Arrays.asList(
                            new SqlParameter().withName("string").withValue(new
Field().withStringValue("Hello")),
                            new SqlParameter().withName("number").withValue(new
Field().withLongValue(1L))
                    ),
                    Arrays.asList(
                            new SqlParameter().withName("string").withValue(new
Field().withStringValue("World")),
                            new SqlParameter().withName("number").withValue(new
Field().withLongValue(2L))
                    )
            ));

    rdsData.batchExecuteStatement(request);
  }
}
```

Controlling Data API timeout behavior

All calls to the Data API are synchronous. Suppose that you perform a Data API operation that runs a SQL statement such as `INSERT` or `CREATE TABLE`. If the Data API call returns successfully, the SQL processing is finished when the call returns.

By default, the Data API cancels an operation and returns a timeout error if the operation doesn't finish processing within 45 seconds. In that case, the data isn't inserted, the table isn't created, and so on.

You can use the Data API to perform long-running operations that can't complete within 45 seconds. If you expect that an operation such as a bulk `INSERT` or a DDL operation on a large table takes longer than 45 seconds, you can specify the `continueAfterTimeout` parameter for the `ExecuteStatement` operation. Your application still receives the timeout error. However, the operation continues running and isn't canceled. For an example, see Running a SQL transaction.

If the Amazon SDK for your programming language has its own timeout period for API calls or HTTP socket connections, make sure that all such timeout periods are more than 45 seconds. For some SDKs, the timeout period is less than 45 seconds by default. We recommend setting any SDK-specific or client-specific timeout periods to at least one minute. Doing so avoids the possibility that your application receives a timeout error while the Data API operation still completes successfully. That way, you can be sure whether to retry the operation or not.

For example, suppose that the SDK returns a timeout error to your application, but the Data API operation still completes within the Data API timeout interval. In that case, retrying the operation might insert duplicate data or otherwise produce incorrect results. The SDK might retry the operation automatically, causing incorrect data without any action from your application.

The timeout interval is especially important for the Java 2 SDK. In that SDK, the API call timeout and the HTTP socket timeout are both 30 seconds by default. Here is an example of setting those timeouts to a higher value:

```
public RdsDataClient createRdsDataClient() {
     return RdsDataClient.builder()
         .region(Region.US_EAST_1) // Change this to your desired Region
         .overrideConfiguration(createOverrideConfiguration())
         .httpClientBuilder(createHttpClientBuilder())
         .credentialsProvider(defaultCredentialsProvider()) // Change this to your
 desired credentials provider
         .build();
 }

 private static ClientOverrideConfiguration createOverrideConfiguration() {
     return ClientOverrideConfiguration.builder()
         .apiCallTimeout(Duration.ofSeconds(60))
         .build();
 }
```

```
 private HttpClientBuilder createHttpClientBuilder() {
     return ApacheHttpClient.builder() // Change this to your desired HttpClient
         .socketTimeout(Duration.ofSeconds(60));
 }
```

Here is an equivalent example using the asynchronous data client:

```
public static RdsDataAsyncClient createRdsDataAsyncClient() {
     return RdsDataAsyncClient.builder()
         .region(Region.US_EAST_1) // Change this to your desired Region
         .overrideConfiguration(createOverrideConfiguration())
         .credentialsProvider(defaultCredentialsProvider())  // Change this to your
 desired credentials provider
         .build();
 }

 private static ClientOverrideConfiguration createOverrideConfiguration() {
     return ClientOverrideConfiguration.builder()
         .apiCallAttemptTimeout(Duration.ofSeconds(60))
         .build();
 }

 private HttpClientBuilder createHttpClientBuilder() {
     return NettyNioAsyncHttpClient.builder() // Change this to your desired
 AsyncHttpClient
         .readTimeout(Duration.ofSeconds(60));
 }
```

Using the Java client library for RDS Data API

You can download and use a Java client library for RDS Data API (Data API). This Java client library provides an alternative way to use Data API. Using this library, you can map your client-side classes to Data API requests and responses. This mapping support can ease integration with some specific Java types, such as `Date`, `Time`, and `BigDecimal`.

Downloading the Java client library for Data API

The Data API Java client library is open source in GitHub at the following location:

https://github.com/awslabs/rds-data-api-client-library-java

You can build the library manually from the source files, but the best practice is to consume the library using Apache Maven dependency management. Add the following dependency to your Maven POM file.

For version 2.x, which is compatible with Amazon SDK 2.x, use the following:

```
<dependency>
    <groupId>software.amazon.rdsdata</groupId>
    <artifactId>rds-data-api-client-library-java</artifactId>
    <version>2.0.0</version>
 </dependency>
```

For version 1.x, which is compatible with Amazon SDK 1.x, use the following:

```
<dependency>
     <groupId>software.amazon.rdsdata</groupId>
     <artifactId>rds-data-api-client-library-java</artifactId>
     <version>1.0.8</version>
 </dependency>
```

Java client library examples

Following, you can find some common examples of using the Data API Java client library. These examples assume that you have a table `accounts` with two columns: `accountId` and `name`. You also have the following data transfer object (DTO).

```
public class Account {
     int accountId;
     String name;
     // getters and setters omitted
 }
```

The client library enables you to pass DTOs as input parameters. The following example shows how customer DTOs are mapped to input parameters sets.

```
var account1 = new Account(1, "John");
```

```
 var account2 = new Account(2, "Mary");
 client.forSql("INSERT INTO accounts(accountId, name) VALUES(:accountId, :name)")
          .withParamSets(account1, account2)
          .execute();
```

In some cases, it's easier to work with simple values as input parameters. You can do so with the following syntax.

```
client.forSql("INSERT INTO accounts(accountId, name) VALUES(:accountId, :name)")
          .withParameter("accountId", 3)
          .withParameter("name", "Zhang")
          .execute();
```

The following is another example that works with simple values as input parameters.

```
 client.forSql("INSERT INTO accounts(accountId, name) VALUES(?, ?)", 4, "Carlos")
          .execute();
```

The client library provides automatic mapping to DTOs when a result is returned. The following examples show how the result is mapped to your DTOs.

```
List<Account> result = client.forSql("SELECT * FROM accounts")
           .execute()
           .mapToList(Account.class);

 Account result = client.forSql("SELECT * FROM accounts WHERE account_id = 1")
           .execute()
           .mapToSingle(Account.class);
```

In many cases, the database result set contains only a single value. In order to simplify retrieving such results, the client library offers the following API:

```
int numberOfAccounts = client.forSql("SELECT COUNT(*) FROM accounts")
           .execute()
           .singleValue(Integer.class);
```

> **Note**
>
> The `mapToList` function converts a SQL result set into a user-defined object list. We don't support using the `.withFormatRecordsAs(RecordsFormatType.JSON)` statement in an `ExecuteStatement` call for the Java client library, because it serves the same purpose. For more information, see Processing Amazon RDS Data API query results in JSON format.

Processing Amazon RDS Data API query results in JSON format

When you call the `ExecuteStatement` operation, you can choose to have the query results returned as a string in JSON format. That way, you can use your programming language's JSON parsing capabilities to interpret and reformat the result set. Doing so can help to avoid writing extra code to loop through the result set and interpret each column value.

To request the result set in JSON format, you pass the optional `formatRecordsAs` parameter with a value of `JSON`. The JSON-formatted result set is returned in the `formattedRecords` field of the `ExecuteStatementResponse` structure.

The `BatchExecuteStatement` action doesn't return a result set. Thus, the JSON option doesn't apply to that action.

To customize the keys in the JSON hash structure, define column aliases in the result set. You can do so by using the AS clause in the column list of your SQL query.

You might use the JSON capability to make the result set easier to read and map its contents to language-specific frameworks. Because the volume of the ASCII-encoded result set is larger than the default representation, you might choose the default representation for queries that return large numbers of rows or large column values that consume more memory than is available to your application.

Topics

- Retrieving query results in JSON format
- Data Type Mapping
- Troubleshooting
- Examples

Retrieving query results in JSON format

To receive the result set as a JSON string, include `.withFormatRecordsAs(RecordsFormatType.JSON)` in the `ExecuteStatement` call. The return value comes back as a JSON string in the `formattedRecords` field. In this case, the `columnMetadata` is `null`. The column labels are the keys of the object that represents each row. These column names are repeated for each row in the result set. The column values are quoted strings, numeric values, or special values representing `true`, `false`, or `null`. Column metadata such as length constraints and the precise type for numbers and strings isn't preserved in the JSON response.

If you omit the `.withFormatRecordsAs()` call or specify a parameter of `NONE`, the result set is returned in binary format using the `Records` and `columnMetadata` fields.

Data Type Mapping

The SQL values in the result set are mapped to a smaller set of JSON types. The values are represented in JSON as strings, numbers, and some special constants such as `true`, `false`, and `null`. You can convert these values into variables in your application, using strong or weak typing as appropriate for your programming language.

JDBC data type	JSON data type
`INTEGER`, `TINYINT`, `SMALLINT`, `BIGINT`	Number by default. String if the `LongReturnType` option is set to `STRING`.
`FLOAT`, `REAL`, `DOUBLE`	Number
`DECIMAL`	String by default. Number if the `DecimalReturnType` option is set to `DOUBLE_OR_LONG`.
`STRING`	String
`BOOLEAN`, `BIT`	Boolean
`BLOB`, `BINARY`, `VARBINARY`, `LONGVARBINARY`	String in base64 encoding.

JDBC data type	JSON data type
CLOB	String
ARRAY	Array
NULL	null
Other types (including types related to date and time)	String

Troubleshooting

The JSON response is limited to 10 megabytes. If the response is larger than this limit, your program receives a `BadRequestException` error. In this case, you can resolve the error using one of the following techniques:

- Reduce the number of rows in the result set. To do so, add a `LIMIT` clause. You might split a large result set into multiple smaller ones by submitting several queries with `LIMIT` and `OFFSET` clauses.

  If the result set includes rows that are filtered out by application logic, you can remove those rows from the result set by adding more conditions in the `WHERE` clause.
- Reduce the number of columns in the result set. To do so, remove items from the select list of the query.
- Shorten the column labels by using column aliases in the query. Each column name is repeated in the JSON string for each row in the result set. Thus, a query result with long column names and many rows could exceed the size limit. In particular, use column aliases for complicated expressions to avoid having the entire expression repeated in the JSON string.
- Although with SQL you can use column aliases to produce a result set having more than one column with the same name, duplicate key names aren't allowed in JSON. The RDS Data API returns an error if you request the result set in JSON format and more than one column has the same name. Thus, make sure that all the column labels have unique names.

Examples

The following Java examples show how to call `ExecuteStatement` with the response as a JSON-formatted string, then interpret the result set. Substitute the appropriate values for the *`databaseName`*, *`secretStoreArn`*, and *`clusterArn`* parameters.

The following Java example demonstrates a query that returns a decimal numeric value in the result set. The `assertThat` calls test that the fields of the response have the expected properties based on the rules for JSON result sets.

This example works with the following schema and sample data:

```
create table test_simplified_json (a float);
insert into test_simplified_json values(10.0);
```

```
public void JSON_result_set_demo() {
    var sql = "select * from test_simplified_json";
    var request = new ExecuteStatementRequest()
      .withDatabase(databaseName)
      .withSecretArn(secretStoreArn)
      .withResourceArn(clusterArn)
      .withSql(sql)
      .withFormatRecordsAs(RecordsFormatType.JSON);
    var result = rdsdataClient.executeStatement(request);
}
```

The value of the `formattedRecords` field from the preceding program is:

```
[{"a":10.0}]
```

The `Records` and `ColumnMetadata` fields in the response are both null, due to the presence of the JSON result set.

The following Java example demonstrates a query that returns an integer numeric value in the result set. The example calls `getFormattedRecords` to return only the JSON-formatted string and ignore the other response fields that are blank or null. The example deserializes the result into a structure representing a list of records. Each record has fields whose names correspond to the column aliases from the result set. This technique simplifies the code that parses the result set. Your application doesn't have to loop through the rows and columns of the result set and convert each value to the appropriate type.

This example works with the following schema and sample data:

```
create table test_simplified_json (a int);
insert into test_simplified_json values(17);
```

```
public void JSON_deserialization_demo() {
    var sql = "select * from test_simplified_json";
    var request = new ExecuteStatementRequest()
      .withDatabase(databaseName)
      .withSecretArn(secretStoreArn)
      .withResourceArn(clusterArn)
      .withSql(sql)
      .withFormatRecordsAs(RecordsFormatType.JSON);
    var result = rdsdataClient.executeStatement(request)
      .getFormattedRecords();

/* Turn the result set into a Java object, a list of records.
   Each record has a field 'a' corresponding to the column
   labelled 'a' in the result set. */
    private static class Record { public int a; }
    var recordsList = new ObjectMapper().readValue(
        response, new TypeReference<List<Record>>() {
        });
}
```

The value of the `formattedRecords` field from the preceding program is:

```
[{"a":17}]
```

To retrieve the a column of result row 0, the application would refer to `recordsList.get(0).a`.

In contrast, the following Java example shows the kind of code that's required to construct a data structure holding the result set when you don't use the JSON format. In this case, each row of the result set contains fields with information about a single user. Building a data structure to represent the result set requires looping through the rows. For each row, the code retrieves the value of each field, performs an appropriate type conversion, and assigns the result to the corresponding field in the object representing the row. Then the code adds the object representing each user to the data structure representing the entire result set. If the query was changed to reorder, add, or remove fields in the result set, the application code would have to change also.

```
/* Verbose result-parsing code that doesn't use the JSON result set format */
```

```
for (var row: response.getRecords()) {
    var user = User.builder()
      .userId(row.get(0).getLongValue())
      .firstName(row.get(1).getStringValue())
      .lastName(row.get(2).getStringValue())
      .dob(Instant.parse(row.get(3).getStringValue()))
      .build();
    result.add(user);
  }
```

The following sample values show the values of the `formattedRecords` field for result sets with different numbers of columns, column aliases, and column data types.

If the result set includes multiple rows, each row is represented as an object that is an array element. Each column in the result set becomes a key in the object. The keys are repeated for each row in the result set. Thus, for result sets consisting of many rows and columns, you might need to define short column aliases to avoid exceeding the length limit for the entire response.

This example works with the following schema and sample data:

```
create table sample_names (id int, name varchar(128));
insert into sample_names values (0, "Jane"), (1, "Mohan"), (2, "Maria"), (3, "Bruce"),
 (4, "Jasmine");
```

```
[{"id":0,"name":"Jane"},{"id":1,"name":"Mohan"},
{"id":2,"name":"Maria"},{"id":3,"name":"Bruce"},{"id":4,"name":"Jasmine"}]
```

If a column in the result set is defined as an expression, the text of the expression becomes the JSON key. Thus, it's typically convenient to define a descriptive column alias for each expression in the select list of the query. For example, the following query includes expressions such as function calls and arithmetic operations in its select list.

```
select count(*), max(id), 4+7 from sample_names;
```

Those expressions are passed through to the JSON result set as keys.

```
[{"count(*)":5,"max(id)":4,"4+7":11}]
```

Adding AS columns with descriptive labels makes the keys simpler to interpret in the JSON result set.

```
select count(*) as rows, max(id) as largest_id, 4+7 as addition_result from
 sample_names;
```

With the revised SQL query, the column labels defined by the AS clauses are used as the key names.

```
[{"rows":5,"largest_id":4,"addition_result":11}]
```

The value for each key-value pair in the JSON string can be a quoted string. The string might contain unicode characters. If the string contains escape sequences or the " or \ characters, those characters are preceded by backslash escape characters. The following examples of JSON strings demonstrate these possibilities. For example, the `string_with_escape_sequences` result contains the special characters backspace, newline, carriage return, tab, form feed, and \.

```
[{"quoted_string":"hello"}]
[{"unicode_string":"####"}]
[{"string_with_escape_sequences":"\b \n \r \t \f \\ '"}]
```

The value for each key-value pair in the JSON string can also represent a number. The number might be an integer, a floating-point value, a negative value, or a value represented as exponential notation. The following examples of JSON strings demonstrate these possibilities.

```
[{"integer_value":17}]
[{"float_value":10.0}]
[{"negative_value":-9223372036854775808,"positive_value":9223372036854775807}]
[{"very_small_floating_point_value":4.9E-324,"very_large_floating_point_value":1.79769313486231
```

Boolean and null values are represented with the unquoted special keywords `true`, `false`, and `null`. The following examples of JSON strings demonstrate these possibilities.

```
[{"boolean_value_1":true,"boolean_value_2":false}]
[{"unknown_value":null}]
```

If you select a value of a BLOB type, the result is represented in the JSON string as a base64-encoded value. To convert the value back to its original representation, you can use the appropriate decoding function in your application's language. For example, in Java you call the function `Base64.getDecoder().decode()`. The following sample output shows the result of selecting a BLOB value of `hello world` and returning the result set as a JSON string.

```
[{"blob_column":"aGVsbG8gd29ybGQ="}]
```

The following Python example shows how to access the values from the result of a call to the Python `execute_statement` function. The result set is a string value in the field `response['formattedRecords']`. The code turns the JSON string into a data structure by calling the `json.loads` function. Then each row of the result set is a list element within the data structure, and within each row you can refer to each field of the result set by name.

```
import json

result = json.loads(response['formattedRecords'])
print (result[0]["id"])
```

The following JavaScript example shows how to access the values from the result of a call to the JavaScript `executeStatement` function. The result set is a string value in the field `response.formattedRecords`. The code turns the JSON string into a data structure by calling the `JSON.parse` function. Then each row of the result set is an array element within the data structure, and within each row you can refer to each field of the result set by name.

```
<script>
    const result = JSON.parse(response.formattedRecords);
    document.getElementById("display").innerHTML = result[0].id;
</script>
```

Troubleshooting Amazon RDS Data API

Use the following sections, titled with common error messages, to help troubleshoot problems that you have with the Amazon RDS Data API (Data API).

Topics

- Transaction <transaction_ID> isn't found
- Packet for query is too large
- Database response exceeded size limit
- HttpEndpoint isn't enabled for cluster <cluster_ID>
- DatabaseErrorException: Transaction is still running a query

- Unsupported result exception
- Multi-statements aren't supported
- Schema parameter isn't supported
- IPv6 connectivity issues

Transaction <transaction_ID> isn't found

In this case, the transaction ID specified in a Data API call wasn't found. The cause for this issue is appended to the error message, and is one of the following:

- Transaction may be expired.

  Make sure that each transactional call runs within three minutes of the previous one.

  It's also possible that the specified transaction ID wasn't created by a BeginTransaction call. Make sure that your call has a valid transaction ID.
- One previous call resulted in a termination of your transaction.

  The transaction was already ended by your `CommitTransaction` or `RollbackTransaction` call.
- Transaction has been aborted due to an error from a previous call.

  Check whether your previous calls have thrown any exceptions.

For information about running transactions, see Calling the Amazon RDS Data API.

Packet for query is too large

In this case, the result set returned for a row was too large. The Data API size limit is 64 KB per row in the result set returned by the database.

To solve this issue, make sure that each row in a result set is 64 KB or less.

Database response exceeded size limit

In this case, the size of the result set returned by the database was too large. The Data API limit is 1 MiB in the result set returned by the database.

To solve this issue, make sure that calls to Data API return 1 MiB of data or less. If you need to return more than 1 MiB, you can use multiple `ExecuteStatement` calls with the `LIMIT` clause in your query.

For more information about the `LIMIT` clause, see SELECT syntax in the MySQL documentation.

HttpEndpoint isn't enabled for cluster <cluster_ID>

Check the following potential causes for this issue:

- The Aurora DB cluster doesn't support Data API. For information about the types of DB clusters RDS Data API supports, see the section called “Region and version availability for the Amazon RDS Data API”.
- Data API isn't enabled for the Aurora DB cluster. To use Data API with an Aurora DB cluster, Data API must be enabled for the DB cluster. For information about enabling Data API, see Enabling the Amazon RDS Data API.
- The DB cluster was renamed after Data API was enabled for it. In that case, turn off Data API for that cluster and then enable it again.
- The ARN you specified doesn't precisely match the ARN of the cluster. Check that the ARN returned from another source or constructed by program logic matches the ARN of the cluster exactly. For example, make sure that the ARN you use has the correct letter case for all alphabetic characters.

DatabaseErrorException: Transaction is still running a query

If your application sends a request with a transaction ID and that transaction is currently processing another request, Data API returns this error to your application immediately. This condition might arise if your application makes asynchronous requests, using a mechanism such as "promises" in Javascript.

To solve this issue, wait until the previous request finishes and then retry the request. You can keep retrying until the error no longer occurs, or the application receives some different kind of error.

This condition can happen with Data API for Aurora serverless and provisioned instances.

Unsupported result exception

The Data API doesn't support all data types. This error occurs when you execute a query that returns an unsupported data type.

To work around this issue, cast the unsupported data type to TEXT. For example:

```
SELECT custom_type::TEXT FROM my_table;
 -- OR
 SELECT CAST(custom_type AS TEXT) FROM my_table;
```

Multi-statements aren't supported

Multi-statements are not supported in the Data API for Aurora serverless and provisioned clusters. Attempting to execute multiple statements in a single API call results in this error.

To execute multiple statements, use separate `ExecuteStatement` API calls or use the `BatchExecuteStatement` API for batch processing.

Schema parameter isn't supported

Aurora serverless and provisioned clusters explicitly reject API calls that include the schema parameter.

To solve this issue, remove the schema parameter from all calls to the Data API when you use Aurora serverless or provisioned clusters.

IPv6 connectivity issues

If you experience issues when connecting to Data API using IPv6 endpoints, check the following potential causes:

- **Network doesn't support IPv6**: Verify that your network infrastructure supports IPv6 and that IPv6 routing is configured correctly.
- **DNS resolution issues**: Ensure that your DNS resolver can resolve AAAA records for the dual-stack endpoints (for example, `rds-data.us-east-1.api.aws`).
- **Security group configuration**: Update security group rules to allow IPv6 traffic on port 443 (HTTPS). Add rules for IPv6 CIDR blocks (for example, `::/0` for all IPv6 addresses).
- **Network ACL configuration**: Ensure that network ACLs allow IPv6 traffic on the required ports.
- **Client library compatibility**: Verify that your HTTP client libraries and Amazon SDKs support IPv6 and dual-stack connectivity.
- **VPC endpoint configuration**: If using PrivateLink, ensure that your VPC endpoint is configured to support IPv6 and that the associated subnets have IPv6 CIDR blocks assigned.

To troubleshoot IPv6 connectivity issues:

1. Test connectivity using the IPv4-only endpoints (`.amazonaws.com`) to verify that the issue is specific to IPv6.
2. Use network diagnostic tools to verify IPv6 connectivity to the dual-stack endpoints.
3. Check CloudTrail logs for any authentication or authorization errors when using IPv6 endpoints.
4. Verify that your application is correctly configured to use the new dual-stack endpoint URLs.

Logging Amazon RDS Data API calls with Amazon CloudTrail

RDS Data API (Data API) is integrated with Amazon CloudTrail, a service that provides a record of actions taken by a user, role, or an Amazon service in Data API. CloudTrail captures all API calls for Data API as events, including calls from the Amazon RDS console and from code calls to Data API operations. If you create a trail, you can enable continuous delivery of CloudTrail events to an Amazon S3 bucket, including events for Data API. Using the data collected by CloudTrail, you can determine a lot of information. This information includes the request that was made to Data API, the IP address the request was made from, who made the request, when it was made, and additional details.

To learn more about CloudTrail, see the Amazon CloudTrail User Guide.

Working with Data API information in CloudTrail

CloudTrail is enabled on your Amazon account when you create the account. When supported activity (management events) occurs in Data API, that activity is recorded in a CloudTrail event along with other Amazon service events in **Event history**. You can view, search, and download recent management events in your Amazon account. For more information, see Working with CloudTrail Event history in the *Amazon CloudTrail User Guide.*

For an ongoing record of events in your Amazon account, including events for Data API, create a trail. A *trail* enables CloudTrail to deliver log files to an Amazon S3 bucket. By default, when you create a trail in the console, the trail applies to all Amazon Regions. The trail logs events from all Amazon Regions in the Amazon partition and delivers the log files to the Amazon S3 bucket that you specify. Additionally, you can configure other Amazon services to further analyze and act upon the event data collected in CloudTrail logs. For more information, see the following topics in the *Amazon CloudTrail User Guide*:

- Overview for creating a trail

- CloudTrail supported services and integrations
- Configuring Amazon SNS notifications for CloudTrail
- Receiving CloudTrail log files from multiple Regions and Receiving CloudTrail log files from multiple accounts

All Data API operations are logged by CloudTrail and documented in the *Amazon RDS data service API reference*. For example, calls to the `BatchExecuteStatement`, `BeginTransaction`, `CommitTransaction`, and `ExecuteStatement` operations generate entries in the CloudTrail log files.

Every event or log entry contains information about who generated the request. The identity information helps you determine the following:

- Whether the request was made with root or user credentials.
- Whether the request was made with temporary security credentials for a role or federated user.
- Whether the request was made by another Amazon service.

For more information, see the CloudTrail userIdentity element.

Including and excluding Data API events from an Amazon CloudTrail trail

Most Data API users rely on the events in an Amazon CloudTrail trail to provide a record of Data API operations. Event data doesn't reveal the database name, schema name, or SQL statements in requests to the Data API. However, knowing which user made a type of call against a specific DB cluster at a given time can help to detect anomalous access patterns.

Including Data API events in an Amazon CloudTrail trail

For Aurora MySQL and Aurora PostgreSQL Aurora serverless and provisioned databases, the following Data API operations are logged to Amazon CloudTrail as *data events*. Data events are high-volume data-plane API operations that CloudTrail doesn't log by default. Additional charges apply for data events. For information about CloudTrail pricing, see Amazon CloudTrail Pricing.

- BatchExecuteStatement
- BeginTransaction
- CommitTransaction

- ExecuteStatement
- RollbackTransaction

You can use the CloudTrail console,Amazon CLI, or CloudTrail API operations to log these Data API operations. In the CloudTrail console, choose **RDS Data API - DB Cluster** for the Data event type. For more information, see Logging data events with the Amazon Web Services Management Console in the *Amazon CloudTrail User Guide*.

Using the Amazon CLI, run the `aws cloudtrail put-event-selectors` command to log these Data API operations for your trail. To log all Data API events on DB clusters, specify `AWS::RDS::DBCluster` for the resource type. The following example logs all Data API events on DB clusters. For more information, see Logging data events with the Amazon Command Line Interface in the *Amazon CloudTrail User Guide*.

```
aws cloudtrail put-event-selectors --trail-name trail_name --advanced-event-selectors \
'{
   "Name": "RDS Data API Selector",
   "FieldSelectors": [
      {
         "Field": "eventCategory",
         "Equals": [
            "Data"
         ]
      },
      {
         "Field": "resources.type",
         "Equals": [
            "AWS::RDS::DBCluster"
         ]
      }
   ]
}'
```

You can configure advanced event selectors to additionally filter on the `readOnly`, `eventName`, and `resources.ARN` fields. For more information on these fields, see AdvancedFieldSelector.

Understanding Data API log file entries

A *trail* is a configuration that enables delivery of events as log files to an Amazon S3 bucket that you specify. CloudTrail log files contain one or more log entries. An *event* represents a single

request from any source and includes information about the requested action, the date and time of the action, request parameters, and so on. CloudTrail log files aren't an ordered stack trace of the public API calls, so they don't appear in any specific order.

Aurora MySQL and Aurora PostgreSQL Aurora serverless and provisioned

The following example shows a CloudTrail log entry that demonstrates the `ExecuteStatement` operation for Aurora PostgreSQL Aurora serverless and provisioned databases. For these databases, all Data API events are data events where the event source is **rdsdataapi.amazonaws.com** and the event type is **Rds Data Service**.

```
{
    "eventVersion": "1.05",
    "userIdentity": {
        "type": "IAMUser",
        "principalId": "AKIAIOSFODNN7EXAMPLE",
        "arn": "arn:aws-cn:iam::123456789012:user/johndoe",
        "accountId": "123456789012",
        "accessKeyId": "AKIAI44QH8DHBEXAMPLE",
        "userName": "johndoe"
    },
    "eventTime": "2019-12-18T00:49:34Z",
    "eventSource": "rdsdataapi.amazonaws.com",
    "eventName": "ExecuteStatement",
    "awsRegion": "us-east-1",
    "sourceIPAddress": "192.0.2.0",
    "userAgent": "aws-cli/1.16.102 Python/3.7.2 Windows/10 botocore/1.12.92",
    "requestParameters": {
        "continueAfterTimeout": false,
        "database": "**********",
        "includeResultMetadata": false,
        "parameters": [],
        "resourceArn": "arn:aws-cn:rds:us-east-1:123456789012:cluster:my-database-1",
        "schema": "**********",
        "secretArn": "arn:aws-cn:secretsmanager:us-
east-1:123456789012:secret:dataapisecret-ABC123",
        "sql": "**********"
    },
    "responseElements": null,
    "requestID": "6ba9a36e-b3aa-4ca8-9a2e-15a9eada988e",
    "eventID": "a2c7a357-ee8e-4755-a0d0-aed11ed4253a",
    "eventType": "Rds Data Service",
```

```
    "recipientAccountId": "123456789012"
}
```

Monitoring RDS Data API queries with Performance Insights

If your Aurora cluster is running Aurora serverless or provisioned instances, you can use Performance Insights with RDS Data API.

For more information about how to use Performance Insights with Aurora, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

How RDS Data API queries are represented in Performance Insights

With Data API, your Aurora cluster processes queries based on Data API calls that you submit from your application. Data API also performs some SQL statements as part of its own internal workings, such as canceling queries that exceed the timeout threshold. Both kinds of SQL operations are shown in Performance Insights statistics and charts.

- For Data API queries that you submit to an Aurora cluster, the **Host** field in the PI dashboard is marked as **RDS Data API**. For Aurora PostgreSQL, the **application_name** field has the value `rds-data-api`. Look for these labels when you analyze database load using **Top hosts** or **Top Applications** as a dimension.
- All internal queries that Data API runs to manage database aspects such as the connection pool and query timeouts are annotated with a prefix **RDS Data API**. Example: `/* RDS Data API */ select * from my_table;` Looks for these prefixes when you analyze database load by **Top SQL** as a dimension. statements are annotated with a SQL comment of `/* RDS Data API */`.

Using the Aurora query editor

The Aurora query editor lets you run SQL statements on your Aurora DB cluster through the Amazon Web Services Management Console. You can run SQL queries, data manipulation (DML) statements, and data definition (DDL) statements. Using the console interface lets you perform database maintenance, produce reports, and conduct SQL experiments. You can avoid setting up the network configuration to connect to your DB cluster from a separate client system such as an EC2 instance or a laptop computer.

The query editor requires an Aurora DB cluster with RDS Data API (Data API) enabled. For information about DB clusters that support Data API and how to enable it, see Using the Amazon RDS Data API. The SQL that you can run is subject to the Data API limitations. For more information, see the section called "Limitations".

Availability of the query editor

The query editor is available for Aurora DB clusters using Aurora MySQL and Aurora PostgreSQL engine versions that support Data API, and in the Amazon Web Services Regions where Data API is available. For more information, see Supported Regions and Aurora DB engines for RDS Data API.

Authorizing access to the query editor

A user must be authorized to run queries in the query editor. You can authorize a user to run queries in the query editor by adding the `AmazonRDSDataFullAccess` policy, a predefined Amazon Identity and Access Management (IAM) policy, to that user.

> **Note**
>
> Make sure to use the same user name and password when you create the IAM user as you did for the database user, such as the administrative user name and password. For more information, see Creating an IAM user in your Amazon Web Services account in the *Amazon Identity and Access Management User Guide*.

You can also create an IAM policy that grants access to the query editor. After you create the policy, add it to each user that requires access to the query editor.

The following policy provides the minimum required permissions for a user to access the query editor.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Sid": "QueryEditor0",
            "Effect": "Allow",
            "Action": [
                "secretsmanager:GetSecretValue",
                "secretsmanager:PutResourcePolicy",
                "secretsmanager:PutSecretValue",
                "secretsmanager:DeleteSecret",
                "secretsmanager:DescribeSecret",
                "secretsmanager:TagResource"
            ],
            "Resource": "arn:aws-cn:secretsmanager:*:*:secret:rds-db-credentials/
*"
        },
        {
            "Sid": "QueryEditor1",
            "Effect": "Allow",
            "Action": [
                "secretsmanager:GetRandomPassword",
                "tag:GetResources",
                "secretsmanager:CreateSecret",
                "secretsmanager:ListSecrets",
                "dbqms:CreateFavoriteQuery",
                "dbqms:DescribeFavoriteQueries",
                "dbqms:UpdateFavoriteQuery",
                "dbqms:DeleteFavoriteQueries",
                "dbqms:GetQueryString",
                "dbqms:CreateQueryHistory",
                "dbqms:UpdateQueryHistory",
                "dbqms:DeleteQueryHistory",
                "dbqms:DescribeQueryHistory",
                "rds-data:BatchExecuteStatement",
                "rds-data:BeginTransaction",
                "rds-data:CommitTransaction",
```

```
                "rds-data:ExecuteStatement",
                "rds-data:RollbackTransaction"
            ],
            "Resource": "*"
        }
    ]
}
```

For information about creating an IAM policy, see Creating IAM policies in the *Amazon Identity and Access Management User Guide*.


For information about adding an IAM policy to a user, see Adding and removing IAM identity permissions in the *Amazon Identity and Access Management User Guide*.

Running queries in the query editor

You can run SQL statements on an Aurora DB cluster in the query editor. The SQL that you can run is subject to the Data API limitations. For more information, see the section called “Limitations”.

To run a query in the query editor

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the Amazon Web Services Management Console, choose the Amazon Web Services Region in which you created the Aurora DB clusters that you want to query.
3. In the navigation pane, choose **Databases**.
4. Choose the Aurora DB cluster that you want to run SQL queries on.
5. For **Actions**, choose **Query**. If you haven't connected to the database before, the **Connect to database** page opens.

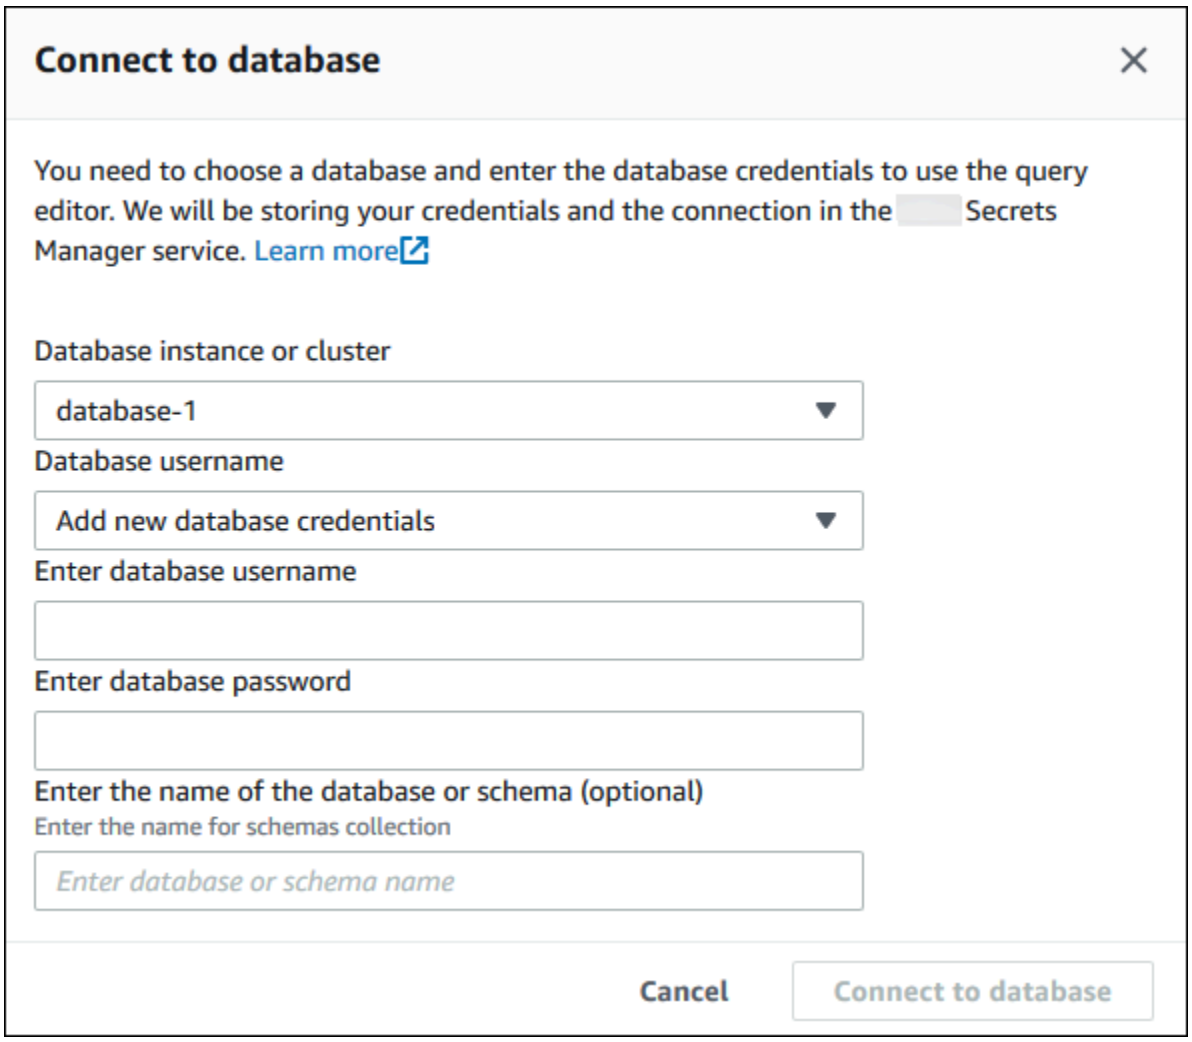

6. Enter the following information:

   a. For **Database instance or cluster**, choose the Aurora DB cluster that you want to run SQL queries on.

   b. For **Database username**, choose the user name of the database user to connect with, or choose **Add new database credentials**. If you choose **Add new database credentials**, enter the user name for the new database credentials in **Enter database username**.


   c. For **Enter database password**, enter the password for the database user that you chose.

   d. In the last box, enter the name of the database or schema that you want to use for the Aurora DB cluster.

   e. Choose **Connect to database**.

> **Note**
>
> If your connection is successful, your connection and authentication information are stored in Amazon Secrets Manager. You don't need to enter the connection information again.


7. In the query editor, enter the SQL query that you want to run on the database.

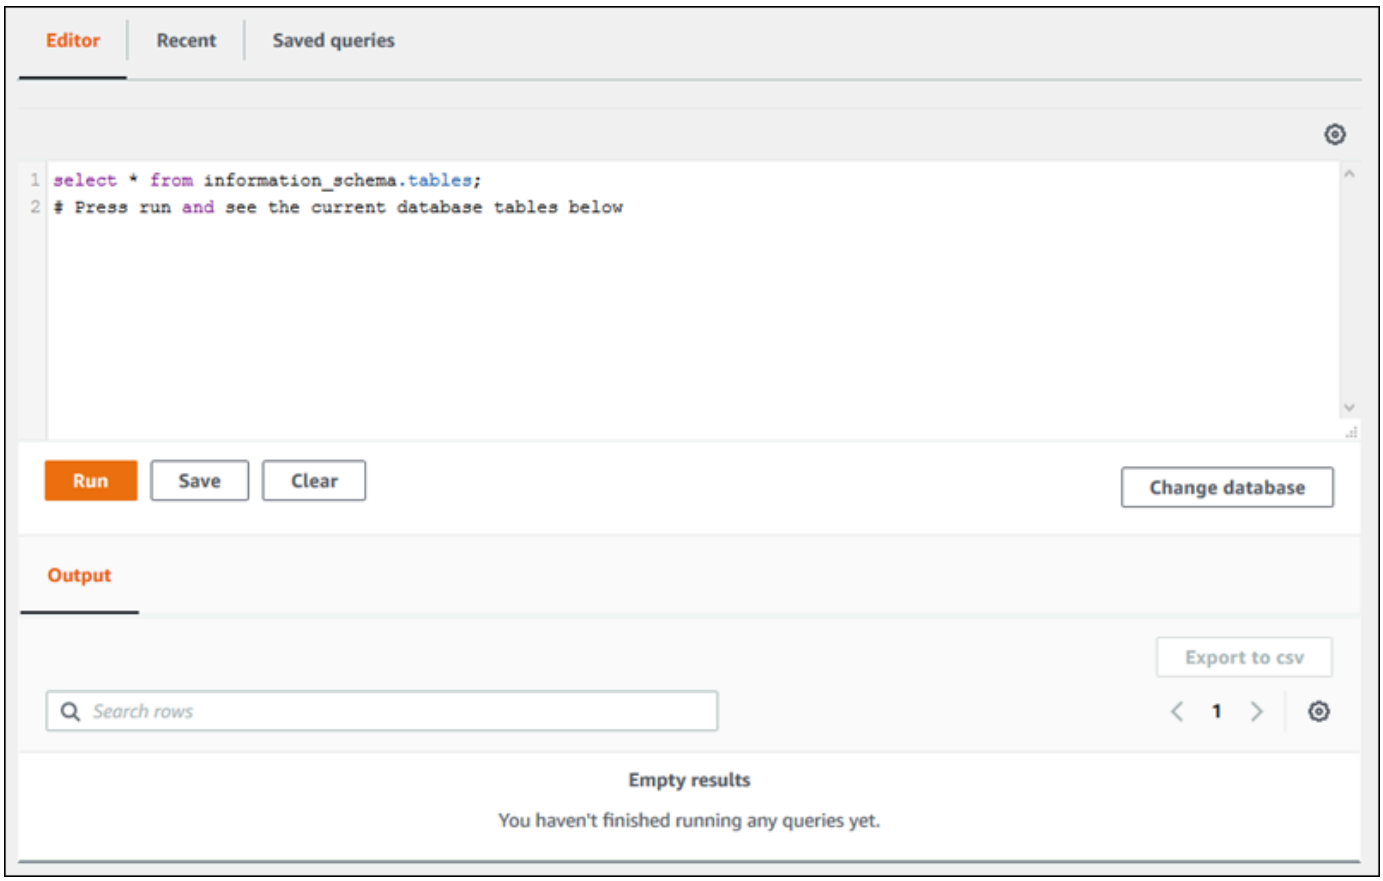

Each SQL statement can commit automatically, or you can run SQL statements in a script as part of a transaction. To control this behavior, choose the gear icon above the query window.



The **Query Editor Settings** window appears.

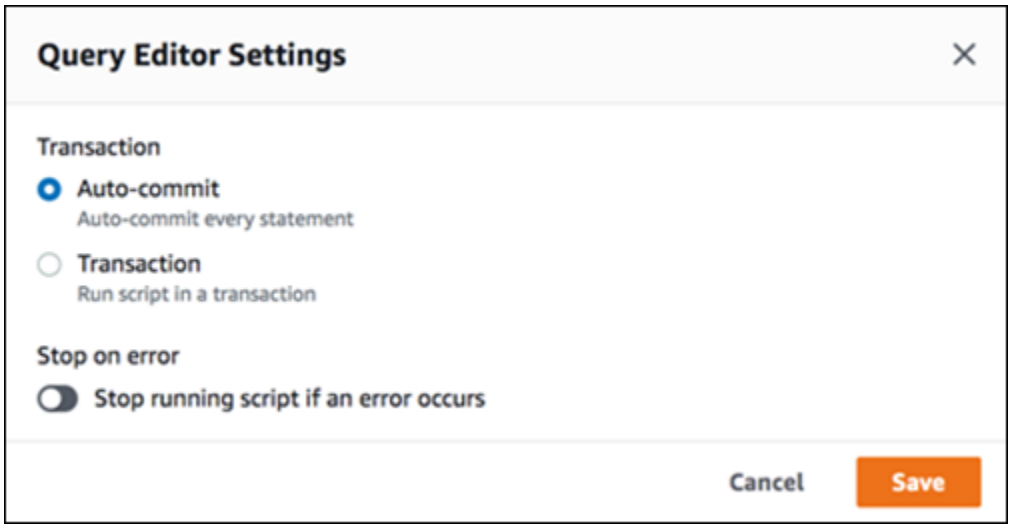

If you choose **Auto-commit**, every SQL statement commits automatically. If you choose **Transaction**, you can run a group of statements in a script. Statements are automatically committed at the end of the script unless explicitly committed or rolled back before then. Also, you can choose to stop a running script if an error occurs by enabling **Stop on error**.

> **Note**
>
> In a group of statements, data definition language (DDL) statements can cause previous data manipulation language (DML) statements to commit. You can also include `COMMIT` and `ROLLBACK` statements in a group of statements in a script.

After you make your choices in the **Query Editor Settings** window, choose **Save**.

8. Choose **Run** or press Ctrl+Enter, and the query editor displays the results of your query.

   After running the query, save it to **Saved queries** by choosing **Save**.

   Export the query results to spreadsheet format by choosing **Export to csv**.

You can find, edit, and rerun previous queries. To do so, choose the **Recent** tab or the **Saved queries** tab, choose the query text, and then choose **Run**.

To change the database, choose **Change database**.

Database Query Metadata Service (DBQMS) API reference

The Database Query Metadata Service (dbqms) is an internal-only service. It provides your recent and saved queries for the query editor on the Amazon Web Services Management Console for multiple Amazon services, including Amazon RDS.

Supported DBQMS actions

- CreateFavoriteQuery
- CreateQueryHistory
- CreateTab
- DeleteFavoriteQueries
- DeleteQueryHistory
- DeleteTab
- DescribeFavoriteQueries
- DescribeQueryHistory
- DescribeTabs

- GetQueryString
- UpdateFavoriteQuery
- UpdateQueryHistory
- UpdateTab

CreateFavoriteQuery

Save a new favorite query. Each user can create up to 1000 saved queries. This limit is subject to change in the future.

CreateQueryHistory

Save a new query history entry.

CreateTab

Save a new query tab. Each user can create up to 10 query tabs.

DeleteFavoriteQueries

Delete one or more saved queries.

DeleteQueryHistory

Delete query history entries.

DeleteTab

Delete query tab entries.

DescribeFavoriteQueries

List saved queries created by a user in a given account.

DescribeQueryHistory

List query history entries.

DescribeTabs

List query tabs created by a user in a given account.

GetQueryString

Retrieve full query text from a query ID.

UpdateFavoriteQuery

Update the query string, description, name, or expiration date.

UpdateQueryHistory

Update the status of query history.

UpdateTab

Update the query tab name and query string.

Using Amazon Aurora machine learning

By using Amazon Aurora machine learning, you can integrate your Aurora DB cluster with the following Amazon machine learning service.

SageMaker AI

Amazon SageMaker AI is a fully managed machine learning service. Data scientists and developers use Amazon SageMaker AI to build, train, and test machine learning models for a variety of inference tasks, such as fraud detection and product recommendation. When a machine learning model is ready for use in production, it can be deployed to the Amazon SageMaker AI hosted environment. For more information, see What Is Amazon SageMaker AI? in the *Amazon SageMaker AI Developer Guide*.

Topics

- Using Amazon Aurora machine learning with Aurora MySQL
- Using Amazon Aurora machine learning with Aurora PostgreSQL

Using Amazon Aurora machine learning with Aurora MySQL

By using Amazon Aurora machine learning with your Aurora MySQL DB cluster, you can use Amazon Bedrock, Amazon Comprehend, or Amazon SageMaker AI, depending on your needs. They each support different machine learning use cases.

Contents

- Requirements for using Aurora machine learning with Aurora MySQL
- Region and version availability
- Supported features and limitations of Aurora machine learning with Aurora MySQL
- Setting up your Aurora MySQL DB cluster to use Aurora machine learning
  - Setting up your Aurora MySQL DB cluster to use Amazon Bedrock
  - Setting up your Aurora MySQL DB cluster to use Amazon Comprehend
  - Setting up your Aurora MySQL DB cluster to use SageMaker AI
    - Setting up your Aurora MySQL DB cluster to use Amazon S3 for SageMaker AI (Optional)
- Granting database users access to Aurora machine learning

    - Granting access to Amazon Bedrock functions
    - Granting access to Amazon Comprehend functions
    - Granting access to SageMaker AI functions
- Using Amazon Bedrock with your Aurora MySQL DB cluster
- Using Amazon Comprehend with your Aurora MySQL DB cluster
- Using SageMaker AI with your Aurora MySQL DB cluster
    - Character set requirement for SageMaker AI functions that return strings
    - Exporting data to Amazon S3 for SageMaker AI model training (Advanced)
- Performance considerations for using Aurora machine learning with Aurora MySQL
    - Model and prompt
    - Query cache
    - Batch optimization for Aurora machine learning function calls
- Monitoring Aurora machine learning

Requirements for using Aurora machine learning with Aurora MySQL

Amazon machine learning services are managed services that are set up and run in their own production environments. Aurora machine learning supports integration with Amazon Bedrock, Amazon Comprehend, and SageMaker AI. Before trying to set up your Aurora MySQL DB cluster to use Aurora machine learning, be sure you understand the following requirements and prerequisites.

- The machine learning services must be running in the same Amazon Web Services Region as your Aurora MySQL DB cluster. You can't use machine learning services from an Aurora MySQL DB cluster in a different Region.
- If your Aurora MySQL DB cluster is in a different virtual public cloud (VPC) from your Amazon Bedrock, Amazon Comprehend, or SageMaker AI service, the VPC's Security group needs to allow outbound connections to the target Aurora machine learning service. For more information, see Control traffic to your Amazon resources using security groups in the *Amazon VPC User Guide*.
- You can upgrade an Aurora cluster that's running a lower version of Aurora MySQL to a supported higher version if you want to use Aurora machine learning with that cluster. For more information, see Database engine updates for Amazon Aurora MySQL.
- Your Aurora MySQL DB cluster must use a custom DB cluster parameter group. At the end of the setup process for each Aurora machine learning service that you want to use, you add the

Amazon Resource Name (ARN) of the associated IAM role that was created for the service. We recommend that you create a custom DB cluster parameter group for your Aurora MySQL in advance and configure your Aurora MySQL DB cluster to use it so that it's ready for you to modify at the end of the setup process.

- For SageMaker AI:
  - The machine learning components that you want to use for inferences must be set up and ready to use. During the configuration process for your Aurora MySQL DB cluster, make sure to have the ARN of the SageMaker AI endpoint available. The data scientists on your team are likely best able to handle working with SageMaker AI to prepare the models and handle the other such tasks. To get started with Amazon SageMaker AI, see Get Started with Amazon SageMaker AI. For more information about inferences and endpoints, see Real-time inference.
  - To use SageMaker AI with your own training data, you must set up an Amazon S3 bucket as part of your Aurora MySQL configuration for Aurora machine learning. To do so, you follow the same general process as for setting up the SageMaker AI integration. For a summary of this optional setup process, see Setting up your Aurora MySQL DB cluster to use Amazon S3 for SageMaker AI (Optional).
- For Aurora global databases, you set up the Aurora machine learning services that you want to use in all Amazon Web Services Regions that make up your Aurora global database. For example, if you want to use Aurora machine learning with SageMaker AI for your Aurora global database, you do the following for every Aurora MySQL DB cluster in every Amazon Web Services Region:
  - Set up the Amazon SageMaker AI services with the same SageMaker AI training models and endpoints. These must also use the same names.
  - Create the IAM roles as detailed in Setting up your Aurora MySQL DB cluster to use Aurora machine learning.
  - Add the ARN of the IAM role to the custom DB cluster parameter group for each Aurora MySQL DB cluster in every Amazon Web Services Region.

  These tasks require that Aurora machine learning is available for your version of Aurora MySQL in all Amazon Web Services Regions that make up your Aurora global database.

Region and version availability

Feature availability and support varies across specific versions of each Aurora database engine, and across Amazon Web Services Regions.

- For information on version and Region availability for Amazon Comprehend and Amazon SageMaker AI with Aurora MySQL, see Aurora machine learning with Aurora MySQL.
- Amazon Bedrock is supported only on Aurora MySQL version 3.06 and higher.

  For information on Region availability for Amazon Bedrock, see Model support by Amazon Web Services Region in the *Amazon Bedrock User Guide*.

Supported features and limitations of Aurora machine learning with Aurora MySQL

When using Aurora MySQL with Aurora machine learning, the following limitations apply:

- The Aurora machine learning extension doesn't support vector interfaces.
- Aurora machine learning integrations aren't supported when used in a trigger.
- Aurora machine learning functions aren't compatible with binary logging (binlog) replication.
  - The setting `--binlog-format=STATEMENT` throws an exception for calls to Aurora machine learning functions.
  - Aurora machine learning functions are nondeterministic, and nondeterministic stored functions aren't compatible with the binlog format.

  For more information, see Binary Logging Formats in the MySQL documentation.
- Stored functions that call tables with generated-always columns aren't supported. This applies to any Aurora MySQL stored function. To learn more about this column type, see CREATE TABLE and Generated Columns in the MySQL documentation.
- Amazon Bedrock functions don't support `RETURNS JSON`. You can use `CONVERT` or `CAST` to convert from `TEXT` to `JSON` if needed.
- Amazon Bedrock doesn't support batch requests.
- Aurora MySQL supports any SageMaker AI endpoint that reads and writes the comma-separated value (CSV) format, through a `ContentType` of `text/csv`. This format is accepted by the following built-in SageMaker AI algorithms:
  - Linear Learner
  - Random Cut Forest
  - XGBoost

To learn more about these algorithms, see Choose an Algorithm in the *Amazon SageMaker AI Developer Guide*.

Setting up your Aurora MySQL DB cluster to use Aurora machine learning

In the following topics, you can find separate setup procedures for each of these Aurora machine learning services.

Topics

- Setting up your Aurora MySQL DB cluster to use Amazon Bedrock
- Setting up your Aurora MySQL DB cluster to use Amazon Comprehend
- Setting up your Aurora MySQL DB cluster to use SageMaker AI
  - Setting up your Aurora MySQL DB cluster to use Amazon S3 for SageMaker AI (Optional)
- Granting database users access to Aurora machine learning
  - Granting access to Amazon Bedrock functions
  - Granting access to Amazon Comprehend functions
  - Granting access to SageMaker AI functions

Setting up your Aurora MySQL DB cluster to use Amazon Bedrock

Aurora machine learning relies on Amazon Identity and Access Management (IAM) roles and policies to allow your Aurora MySQL DB cluster to access and use the Amazon Bedrock services. The following procedures create an IAM permission policy and role so that your DB cluster can integrate with Amazon Bedrock.


To create the IAM policy

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. Choose **Policies** in the navigation pane.
3. Choose **Create a policy**.
4. On the **Specify permissions** page, for **Select a service**, choose **Bedrock**.

The Amazon Bedrock permissions display.

5. Expand **Read**, then select **InvokeModel**.
6. For **Resources**, select **All**.

The **Specify permissions** page should resemble the following figure.

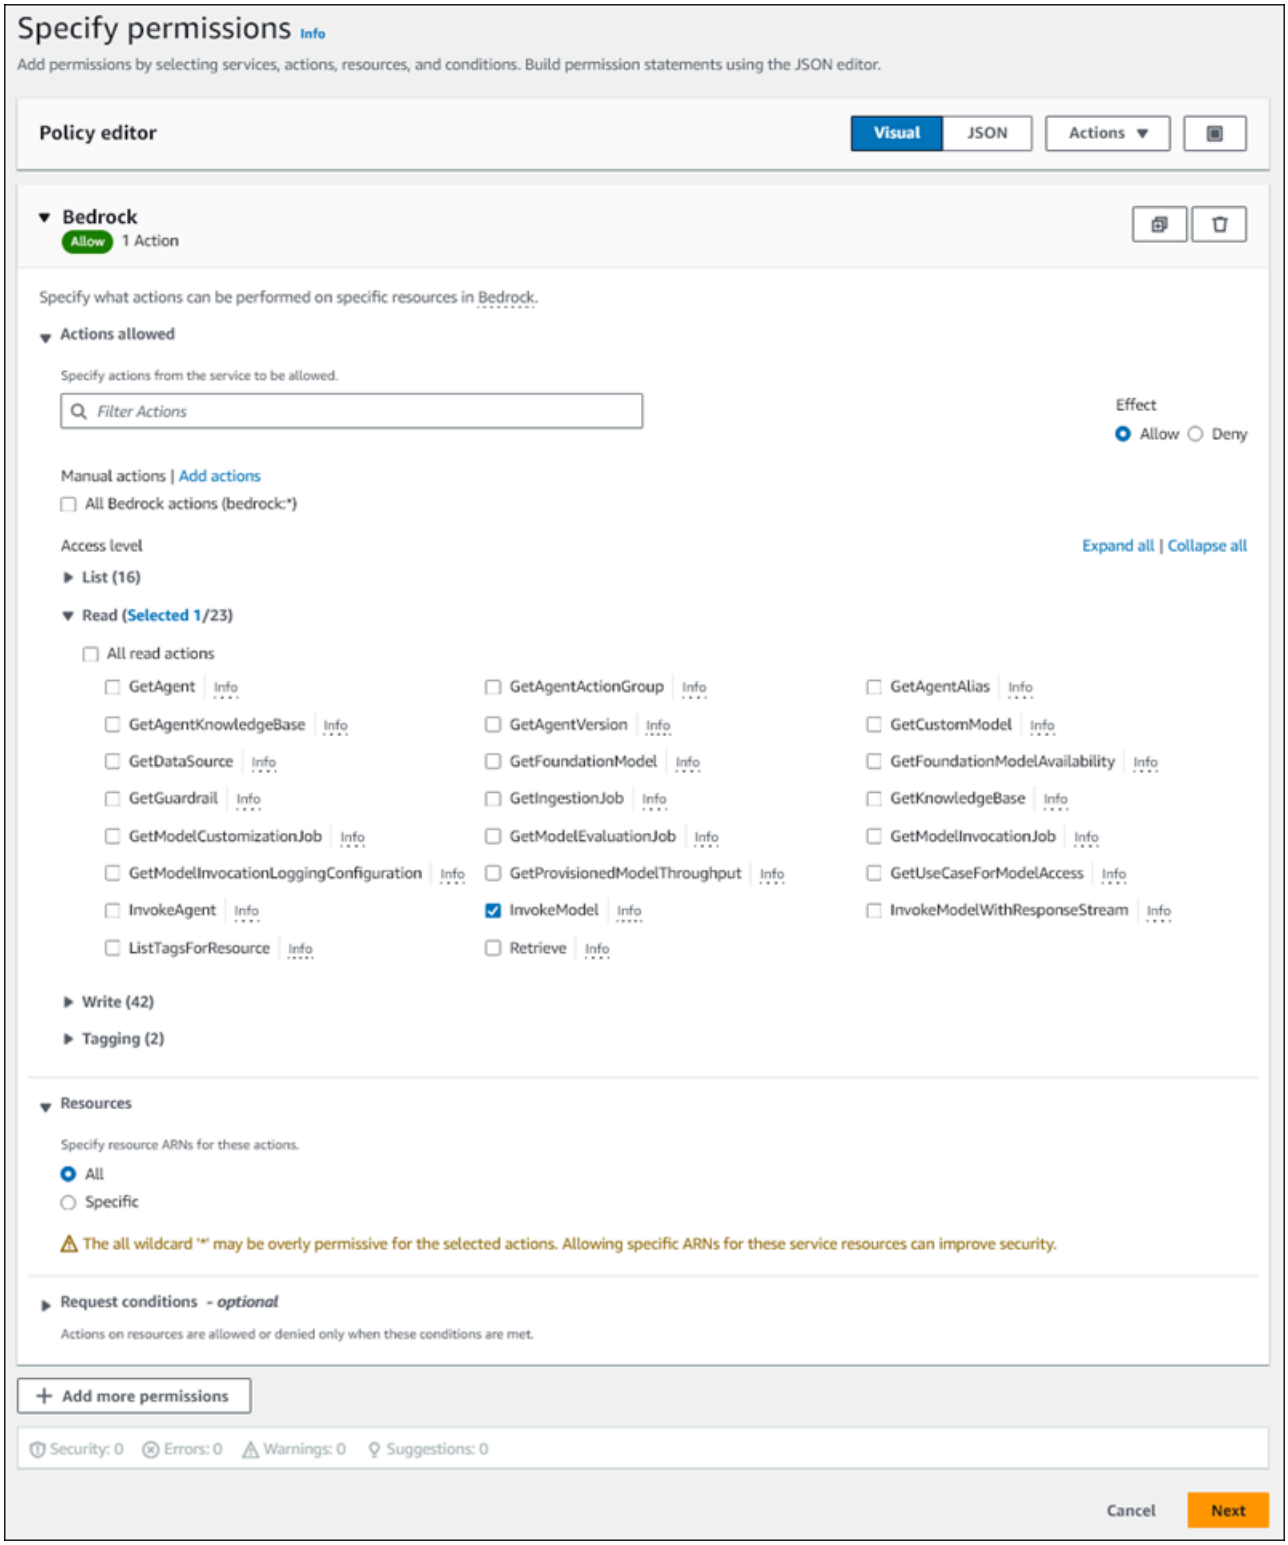

7. Choose **Next**.
8. On the **Review and create** page, enter a name for your policy, for example **`BedrockInvokeModel`**.


9. Review your policy, then choose **Create policy**.

Next you create the IAM role that uses the Amazon Bedrock permission policy.

To create the IAM role

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. Choose **Roles** in the navigation pane.
3. Choose **Create role**.
4. On the **Select trusted entity** page, for **Use case**, choose **RDS**.
5. Select **RDS - Add Role to Database**, then choose **Next**.
6. On the **Add permissions** page, for **Permissions policies**, select the IAM policy that you created, then choose **Next**.
7. On the **Name, review, and create** page, enter a name for your role, for example **`ams-bedrock-invoke-model-role`**.

   The role should resemble the following figure.

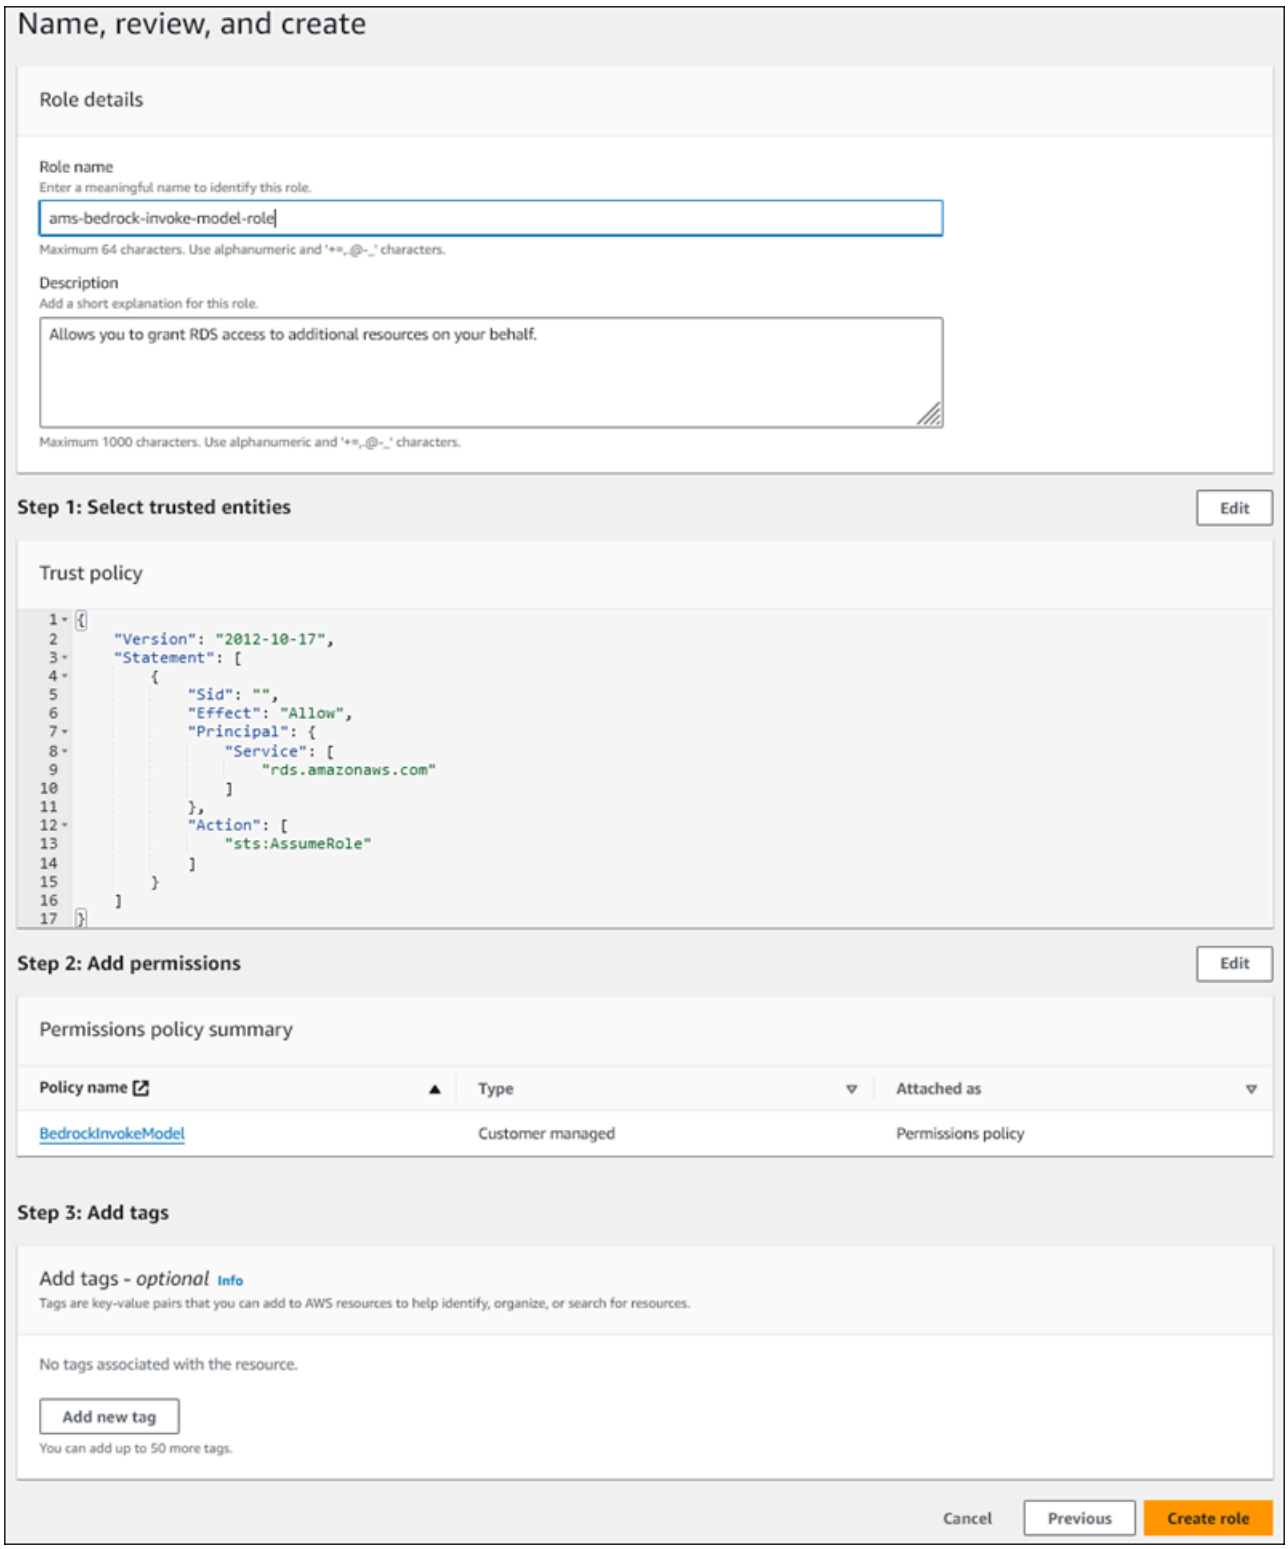


8. Review your role, then choose **Create role**.

Next you associate the Amazon Bedrock IAM role with your DB cluster.

To associate the IAM role with your DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases** from the navigation pane.
3. Choose the Aurora MySQL DB cluster that you want to connect to Amazon Bedrock services.
4. Choose the **Connectivity & security** tab.
5. For **Manage IAM roles** section, choose **Select IAM to add to this cluster**.
6. Choose the IAM that you created, and then choose **Add role**.

   The IAM role is associated with your DB cluster, first with the status **Pending**, then **Active**. When the process completes, you can find the role in the **Current IAM roles for this cluster** list.

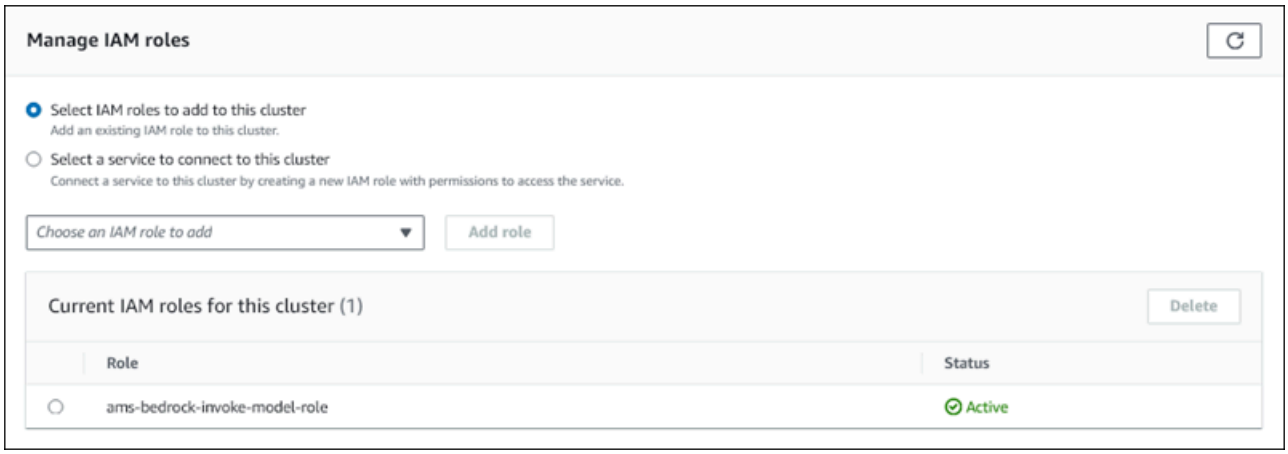

You must add the ARN of this IAM role to the `aws_default_bedrock_role` parameter of the custom DB cluster parameter group associated with your Aurora MySQL DB cluster. If your Aurora MySQL DB cluster doesn't use a custom DB cluster parameter group, you need to create one to use with your Aurora MySQL DB cluster to complete the integration. For more information, see DB cluster parameter groups for Amazon Aurora DB clusters.

To configure the DB cluster parameter

1. In the Amazon RDS Console, open the **Configuration** tab of your Aurora MySQL DB cluster.
2. Locate the DB cluster parameter group configured for your cluster. Choose the link to open your custom DB cluster parameter group, then choose **Edit**.

3. Find the `aws_default_bedrock_role` parameter in your custom DB cluster parameter group.
4. In the **Value** field, enter the ARN of the IAM role.
5. Choose **Save changes** to save the setting.
6. Reboot the primary instance of your Aurora MySQL DB cluster so that this parameter setting takes effect.


The IAM integration for Amazon Bedrock is complete. Continue setting up your Aurora MySQL DB cluster to work with Amazon Bedrock by Granting database users access to Aurora machine learning.

Setting up your Aurora MySQL DB cluster to use Amazon Comprehend

Aurora machine learning relies on Amazon Identity and Access Management roles and policies to allow your Aurora MySQL DB cluster to access and use the Amazon Comprehend services. The following procedure automatically creates an IAM role and policy for your cluster so that it can use Amazon Comprehend.


To set up your Aurora MySQL DB cluster to use Amazon Comprehend

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases** from the navigation pane.
3. Choose the Aurora MySQL DB cluster that you want to connect to Amazon Comprehend services.
4. Choose the **Connectivity & security** tab.
5. For **Manage IAM roles** section, choose **Select a service to connect to this cluster**.
6. Choose **Amazon Comprehend** from the menu, and then choose **Connect service**.

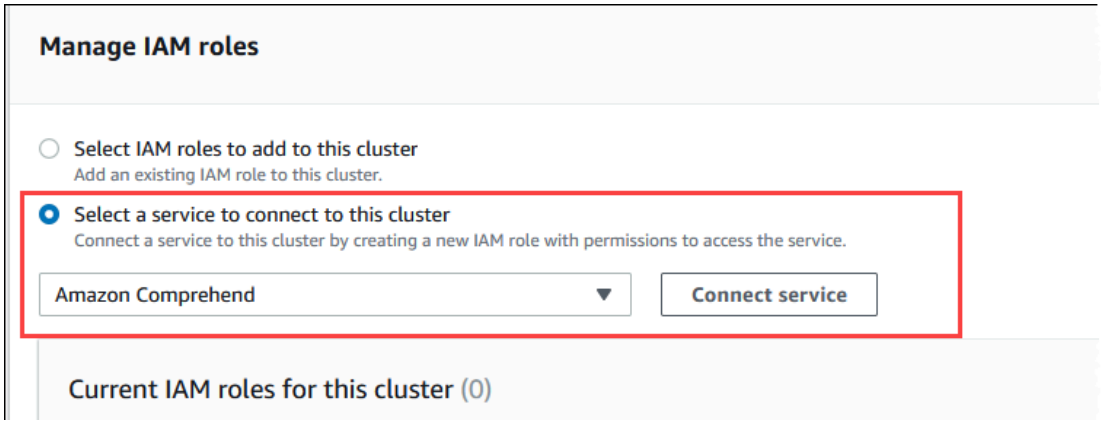

7. The **Connect cluster to Amazon Comprehend** dialog doesn't require any additional information. However, you might see a message notifying you that the integration between Aurora and Amazon Comprehend is currently in preview. Be sure to read the message before you continue. You can choose **Cancel** if you prefer not to proceed.
8. Choose **Connect service** to complete the integration process.

   Aurora creates the IAM role. It also creates the policy that allows the Aurora MySQL DB cluster to use Amazon Comprehend services and attaches the policy to the role. When the process completes, you can find the role in the **Current IAM roles for this cluster** list as shown in the following image.

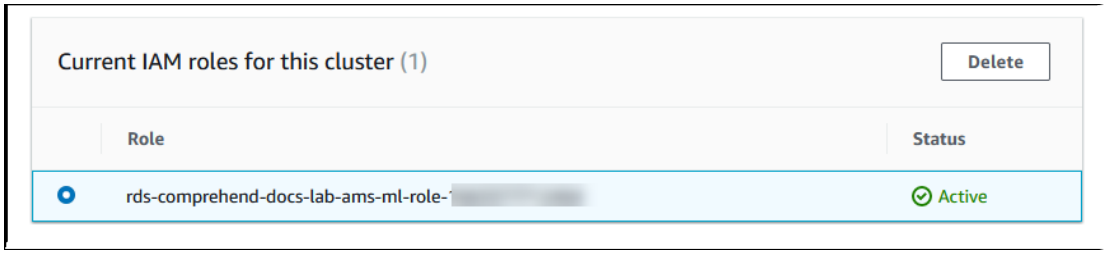

   You need to add the ARN of this IAM role to the `aws_default_comprehend_role` parameter of the custom DB cluster parameter group associated with your Aurora MySQL DB cluster. If your Aurora MySQL DB cluster doesn't use a custom DB cluster parameter group, you need to create one to use with your Aurora MySQL DB cluster to complete the integration. For more information, see DB cluster parameter groups for Amazon Aurora DB clusters.

   After creating your custom DB cluster parameter group and associating it with your Aurora MySQL DB cluster, you can continue following these steps.

   If your cluster uses a custom DB cluster parameter group, do as follows.


a. In the Amazon RDS Console, open the **Configuration** tab of your Aurora MySQL DB cluster.

b. Locate the DB cluster parameter group configured for your cluster. Choose the link to open your custom DB cluster parameter group, then choose **Edit**.

c. Find the `aws_default_comprehend_role` parameter in your custom DB cluster parameter group.

d. In the **Value** field, enter the ARN of the IAM role.

e. Choose **Save changes** to save the setting. In the following image, you can find an example.

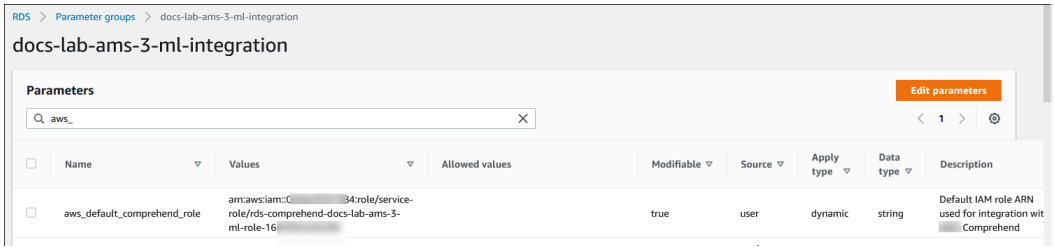


Reboot the primary instance of your Aurora MySQL DB cluster so that this parameter setting takes effect.

The IAM integration for Amazon Comprehend is complete. Continue setting up your Aurora MySQL DB cluster to work with Amazon Comprehend by granting access to the appropriate database users.


Setting up your Aurora MySQL DB cluster to use SageMaker AI

The following procedure automatically creates the IAM role and policy for your Aurora MySQL DB cluster so that it can use SageMaker AI. Before trying to follow this procedure, be sure that you have the SageMaker AI endpoint available so that you can enter it when needed. Typically, data scientists on your team would do the work to produce an endpoint that you can use from your Aurora MySQL DB cluster. You can find such endpoints in the SageMaker AI console. In the navigation pane, open the **Inference** menu and choose **Endpoints**. In the following image, you can find an example.

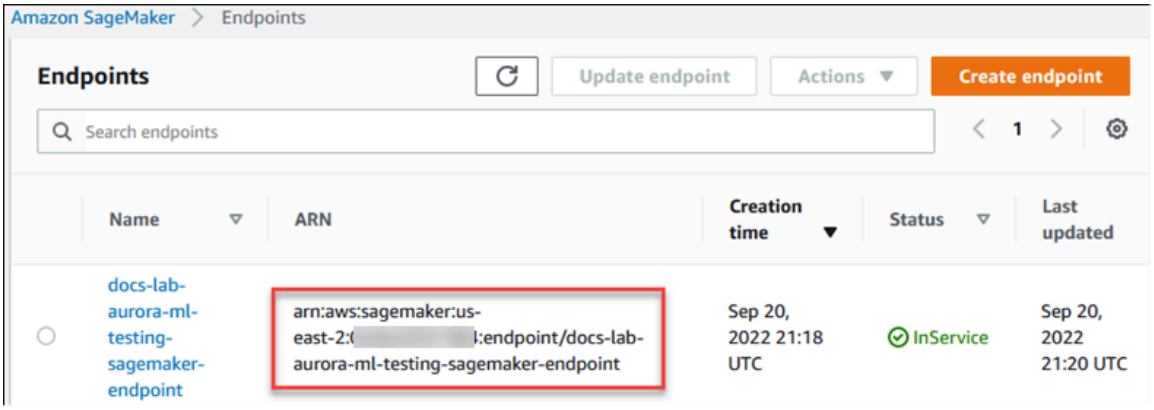


To set up your Aurora MySQL DB cluster to use SageMaker AI

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases** from the Amazon RDS navigation menu and then choose the Aurora MySQL DB cluster that you want to connect to SageMaker AI services.
3. Choose the **Connectivity & security** tab.
4. Scroll to the **Manage IAM roles** section, and then choose **Select a service to connect to this cluster**. Choose **SageMaker AI** from the selector.

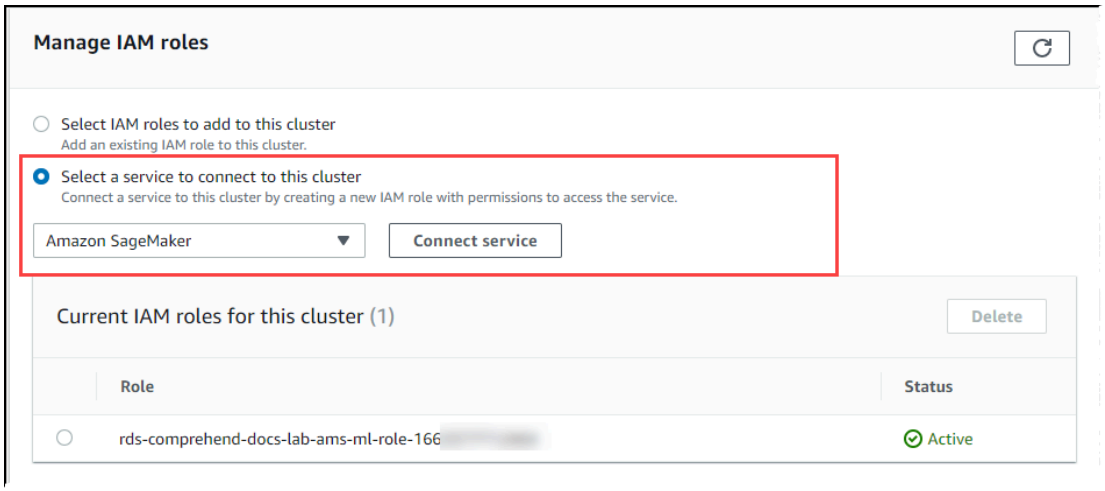

5. Choose **Connect service**.
6. In the **Connect cluster to SageMaker AI** dialog, enter the ARN of the SageMaker AI endpoint.

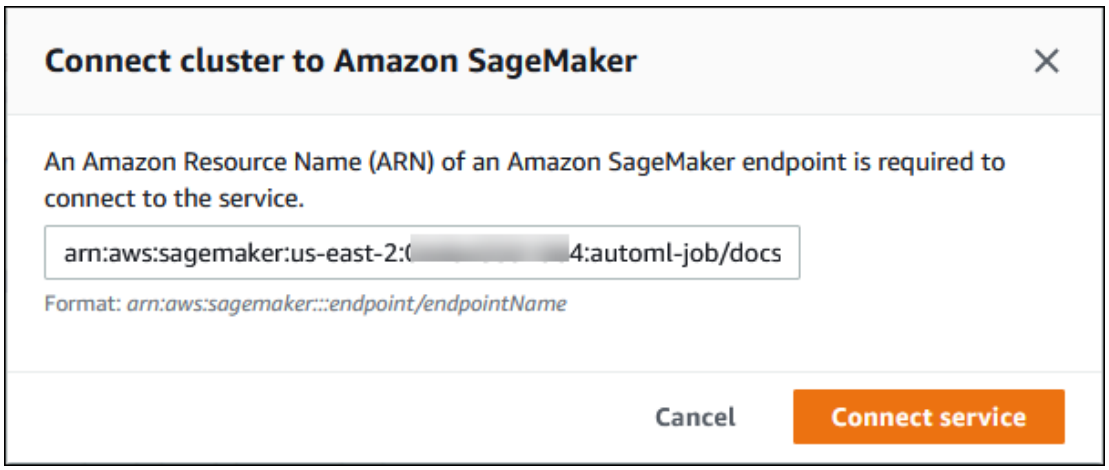

7. Aurora creates the IAM role. It also creates the policy that allows the Aurora MySQL DB cluster to use SageMaker AI services and attaches the policy to the role. When the process completes, you can find the role in the **Current IAM roles for this cluster** list.
8. Open the IAM console at https://console.amazonaws.cn/iam/.
9. Choose **Roles** from the Access management section of the Amazon Identity and Access Management navigation menu.
10. Find the role from among those listed. Its name uses the following pattern.

    ```
    rds-sagemaker-your-cluster-name-role-auto-generated-digits
    ```

11. Open the role's Summary page and locate the ARN. Note the ARN or copy it using the copy widget.
12. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
13. Choose your Aurora MySQL DB cluster, and then choose its **Configuration** tab.
14. Locate the DB cluster parameter group, and choose the link to open your custom DB cluster parameter group. Find the `aws_default_sagemaker_role` parameter and enter the ARN of the IAM role in the Value field and Save the setting.
15. Reboot the primary instance of your Aurora MySQL DB cluster so that this parameter setting takes effect.

The IAM setup is now complete. Continue setting up your Aurora MySQL DB cluster to work with SageMaker AI by granting access to the appropriate database users.

If you want to use your SageMaker AI models for training rather than using pre-built SageMaker AI components, you also need to add the Amazon S3 bucket to your Aurora MySQL DB cluster,


as outlined in the Setting up your Aurora MySQL DB cluster to use Amazon S3 for SageMaker AI (Optional) that follows.

Setting up your Aurora MySQL DB cluster to use Amazon S3 for SageMaker AI (Optional)


To use SageMaker AI with your own models rather than using the pre-built components provided by SageMaker AI, you need to set up an Amazon S3 bucket for the Aurora MySQL DB cluster to use. For more information about creating an Amazon S3 bucket, see Creating a bucket in the *Amazon Simple Storage Service User Guide*.

To set up your Aurora MySQL DB cluster to use an Amazon S3 bucket for SageMaker AI

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. Choose **Databases** from the Amazon RDS navigation menu and then choose the Aurora MySQL DB cluster that you want to connect to SageMaker AI services.
3. Choose the **Connectivity & security** tab.
4. Scroll to the **Manage IAM roles** section, and then choose **Select a service to connect to this cluster**. Choose **Amazon S3** from the selector.

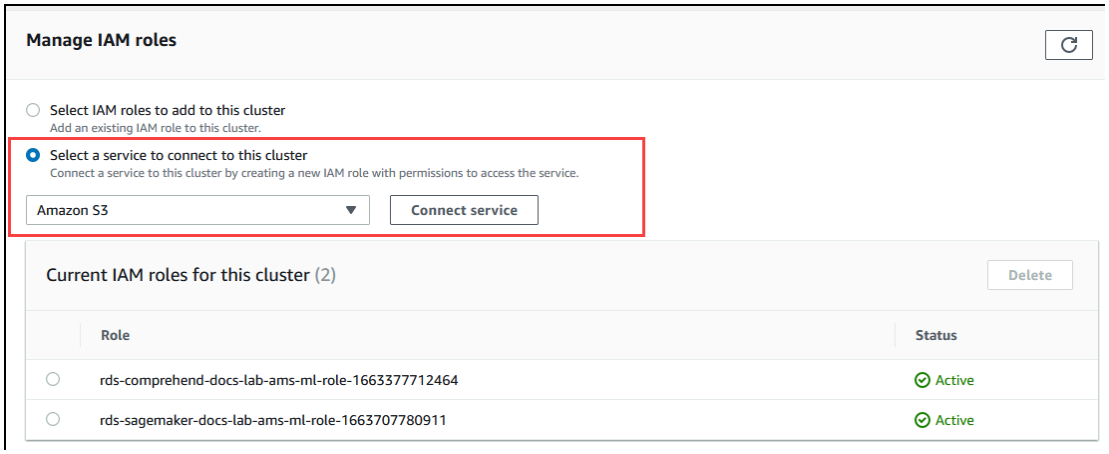

5. Choose **Connect service**.
6. In the **Connect cluster to Amazon S3** dialog, enter the ARN of the Amazon S3 bucket, as shown in the following image.

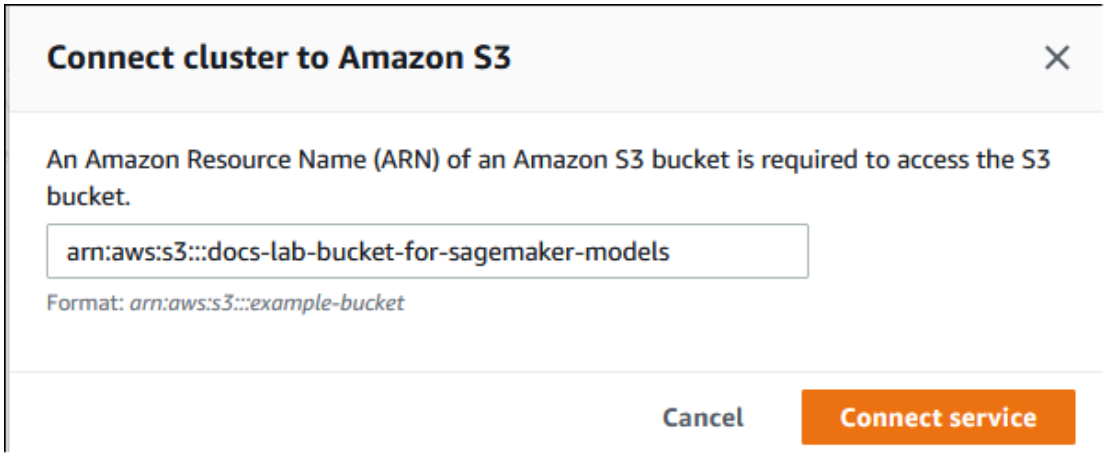

7. Choose **Connect service** to complete this process.

For more information about using Amazon S3 buckets with SageMaker AI, see Specify an Amazon S3 Bucket to Upload Training Datasets and Store Output Data in the *Amazon SageMaker AI Developer Guide*. To learn more about working with SageMaker AI, see Get Started with Amazon SageMaker AI Notebook Instancesin the in the *Amazon SageMaker AI Developer Guide*.

Granting database users access to Aurora machine learning

Database users must be granted permission to invoke Aurora machine learning functions. How you grant permission depends on the version of MySQL that you use for your Aurora MySQL DB cluster, as outlined in the following. How you do so depends on the version of MySQL that your Aurora MySQL DB cluster uses.

- For Aurora MySQL version 3 (MySQL 8.0 compatible), database users must be granted the appropriate *database role*. For more informations, see Using Roles in the *MySQL 8.0 Reference Manual*.
- For Aurora MySQL version 2 (MySQL 5.7 compatible), database users are granted *privileges*. For more information, see Access Control and Account Management in the *MySQL 5.7 Reference Manual*.

The following table shows the roles and privileges that database users need to work with machine learning functions.

Aurora MySQL version 3 (role)	Aurora MySQL version 2 (privilege)
Amazon_BEDROCK_ACCESS	–
Amazon_COMPREHEND_ACCESS	INVOKE COMPREHEND
Amazon_SAGEMAKER_ACCESS	INVOKE SAGEMAKER

Granting access to Amazon Bedrock functions

To give database users access to Amazon Bedrock functions, use the following SQL statement:

```
GRANT Amazon_BEDROCK_ACCESS TO user@domain-or-ip-address;
```

Database users also need to be granted EXECUTE permissions for the functions that you create for working with Amazon Bedrock:

```
GRANT EXECUTE ON FUNCTION database_name.function_name TO user@domain-or-ip-address;
```

Finally, database users must have their roles set to Amazon_BEDROCK_ACCESS:

```
SET ROLE Amazon_BEDROCK_ACCESS;
```

The Amazon Bedrock functions are now available for use.

Granting access to Amazon Comprehend functions

To give database users access to Amazon Comprehend functions, use the appropriate statement for your Aurora MySQL version.

- Aurora MySQL version 3 (MySQL 8.0 compatible)

  ```
  GRANT Amazon_COMPREHEND_ACCESS TO user@domain-or-ip-address;
  ```

- Aurora MySQL version 2 (MySQL 5.7 compatible)

  ```
  GRANT INVOKE COMPREHEND ON *.* TO user@domain-or-ip-address;
  ```

The Amazon Comprehend functions are now available for use. For usage examples, see Using Amazon Comprehend with your Aurora MySQL DB cluster.

Granting access to SageMaker AI functions

To give database users access to SageMaker AI functions, use the appropriate statement for your Aurora MySQL version.

- Aurora MySQL version 3 (MySQL 8.0 compatible)

```
GRANT Amazon_SAGEMAKER_ACCESS TO user@domain-or-ip-address;
```

- Aurora MySQL version 2 (MySQL 5.7 compatible)

```
GRANT INVOKE SAGEMAKER ON *.* TO user@domain-or-ip-address;
```

Database users also need to be granted EXECUTE permissions for the functions that you create for working with SageMaker AI. Suppose that you created two functions, `db1.anomoly_score` and `db2.company_forecasts`, to invoke the services of your SageMaker AI endpoint. You grant execute privileges as shown in the following example.

```
GRANT EXECUTE ON FUNCTION db1.anomaly_score TO user1@domain-or-ip-address1;
GRANT EXECUTE ON FUNCTION db2.company_forecasts TO user2@domain-or-ip-address2;
```

The SageMaker AI functions are now available for use. For usage examples, see Using SageMaker AI with your Aurora MySQL DB cluster.

Using Amazon Bedrock with your Aurora MySQL DB cluster

To use Amazon Bedrock, you create a user-defined function (UDF) in your Aurora MySQL database that invokes a model. For more information, see Supported models in Amazon Bedrock in the *Amazon Bedrock User Guide*.

A UDF uses the following syntax:

```
CREATE FUNCTION function_name (argument type)
        [DEFINER = user]
    RETURNS mysql_data_type
    [SQL SECURITY {DEFINER | INVOKER}]
    ALIAS AWS_BEDROCK_INVOKE_MODEL
```

```
    MODEL ID 'model_id'
    [CONTENT_TYPE 'content_type']
    [ACCEPT 'content_type']
    [TIMEOUT_MS timeout_in_milliseconds];
```

- Amazon Bedrock functions don't support `RETURNS JSON`. You can use `CONVERT` or `CAST` to convert from `TEXT` to `JSON` if needed.
- If you don't specify `CONTENT_TYPE` or `ACCEPT`, the default is `application/json`.
- If you don't specify `TIMEOUT_MS`, the value for `aurora_ml_inference_timeout` is used.

For example, the following UDF invokes the Amazon Titan Text Express model:

```
CREATE FUNCTION invoke_titan (request_body TEXT)
    RETURNS TEXT
    ALIAS AWS_BEDROCK_INVOKE_MODEL
    MODEL ID 'amazon.titan-text-express-v1'
    CONTENT_TYPE 'application/json'
    ACCEPT 'application/json';
```

To allow a DB user to use this function, use the following SQL command:

```
GRANT EXECUTE ON FUNCTION database_name.invoke_titan TO user@domain-or-ip-address;
```

Then the user can call `invoke_titan` like any other function, as shown in the following example. Make sure to format the request body according to the Amazon Titan text models.

```
CREATE TABLE prompts (request varchar(1024));
INSERT INTO prompts VALUES (
'{
    "inputText": "Generate synthetic data for daily product sales in various categories
 - include row number, product name, category, date of sale and price. Produce output
 in JSON format. Count records and ensure there are no more than 5.",
    "textGenerationConfig": {
        "maxTokenCount": 1024,
        "stopSequences": [],
        "temperature":0,
        "topP":1
    }
}');
```

```
SELECT invoke_titan(request) FROM prompts;

{"inputTextTokenCount":44,"results":[{"tokenCount":296,"outputText":"
```tabular-data-json
{
    "rows": [
        {
            "Row Number": "1",
            "Product Name": "T-Shirt",
            "Category": "Clothing",
            "Date of Sale": "2024-01-01",
            "Price": "$20"
        },
        {
            "Row Number": "2",
            "Product Name": "Jeans",
            "Category": "Clothing",
            "Date of Sale": "2024-01-02",
            "Price": "$30"
        },
        {
            "Row Number": "3",
            "Product Name": "Hat",
            "Category": "Accessories",
            "Date of Sale": "2024-01-03",
            "Price": "$15"
        },
        {
            "Row Number": "4",
            "Product Name": "Watch",
            "Category": "Accessories",
            "Date of Sale": "2024-01-04",
            "Price": "$40"
        },
        {
            "Row Number": "5",
            "Product Name": "Phone Case",
            "Category": "Accessories",
            "Date of Sale": "2024-01-05",
            "Price": "$25"
        }
    ]
}
```
```

```
```","completionReason":"FINISH"}]}
```

For other models that you use, make sure to format the request body appropriately for them. For more information, see Inference parameters for foundation models in the *Amazon Bedrock User Guide*.

## Using Amazon Comprehend with your Aurora MySQL DB cluster

For Aurora MySQL, Aurora machine learning provides the following two built-in functions for working with Amazon Comprehend and your text data. You provide the text to analyze (`input_data`) and specify the language (`language_code`).

**aws_comprehend_detect_sentiment**

This function identifies the text as having a positive, negative, neutral, or mixed emotional posture. This function's reference documentation is as follows.

```
aws_comprehend_detect_sentiment(
  input_text,
  language_code
  [,max_batch_size]
)
```

To learn more, see Sentiment in the *Amazon Comprehend Developer Guide*.

aws_comprehend_detect_sentiment_confidence

This function measures the confidence level of the sentiment detected for a given text. It returns a value (type, `double`) that indicates the confidence of the sentiment assigned by the aws_comprehend_detect_sentiment function to the text. Confidence is a statistical metric between 0 and 1. The higher the confidence level, the more weight you can give the result. A summary of the function's documentation is as follows.

```
aws_comprehend_detect_sentiment_confidence(
  input_text,
  language_code
  [,max_batch_size]
)
```
```

In both functions (aws_comprehend_detect_sentiment_confidence, aws_comprehend_detect_sentiment) the `max_batch_size` uses a default value of 25 if none is specified. Batch size should always be greater than 0. You can use `max_batch_size` to tune the performance of the Amazon Comprehend function calls. A large batch size trades off faster performance for greater memory usage on the Aurora MySQL DB cluster. For more information, see Performance considerations for using Aurora machine learning with Aurora MySQL.

For more information about parameters and return types for the sentiment detection functions in Amazon Comprehend, see DetectSentiment

Example: A simple query using Amazon Comprehend functions

Here's an example of a simple query that invokes these two functions to see how happy your customers are with your support team. Suppose you have a database table (`support`) that stores customer feedback after each request for help. This example query applies both built-in functions to the text in the `feedback` column of the table and outputs the results. The confidence values returned by the function are doubles between 0.0 and 1.0. For more readable output, this query rounds the results to 6 decimal points. For easier comparisons, this query also sorts the results in descending order, from the result having the highest degree of confidence, first.

```
SELECT feedback AS 'Customer feedback',
    aws_comprehend_detect_sentiment(feedback, 'en') AS Sentiment,
    ROUND(aws_comprehend_detect_sentiment_confidence(feedback, 'en'), 6)
    AS Confidence FROM support
    ORDER BY Confidence DESC;
+-----------------------------------------------------------+-----------+------------+
| Customer feedback                                         | Sentiment | Confidence |
+-----------------------------------------------------------+-----------+------------+
| Thank you for the excellent customer support!             | POSITIVE  |   0.999771 |
| The latest version of this product stinks!                | NEGATIVE  |   0.999184 |
| Your support team is just awesome! I am blown away.       | POSITIVE  |   0.997774 |
| Your product is too complex, but your support is great.   | MIXED     |   0.957958 |
| Your support tech helped me in fifteen minutes.           | POSITIVE  |   0.949491 |
| My problem was never resolved!                            | NEGATIVE  |   0.920644 |
| When will the new version of this product be released?    | NEUTRAL   |   0.902706 |
| I cannot stand that chatbot.                              | NEGATIVE  |   0.895219 |
| Your support tech talked down to me.                      | NEGATIVE  |   0.868598 |
| It took me way too long to get a real person.             | NEGATIVE  |   0.481805 |
+-----------------------------------------------------------+-----------+------------+
 10 rows in set (0.1898 sec)
```

Example: Determining the average sentiment for text above a specific confidence level

A typical Amazon Comprehend query looks for rows where the sentiment is a certain value, with a confidence level greater than a certain number. For example, the following query shows how you can determine the average sentiment of documents in your database. The query considers only documents where the confidence of the assessment is at least 80%.

```
SELECT AVG(CASE aws_comprehend_detect_sentiment(productTable.document, 'en')
  WHEN 'POSITIVE' THEN 1.0
  WHEN 'NEGATIVE' THEN -1.0
  ELSE 0.0 END) AS avg_sentiment, COUNT(*) AS total
FROM productTable
WHERE productTable.productCode = 1302 AND
    aws_comprehend_detect_sentiment_confidence(productTable.document, 'en') >= 0.80;
```

Using SageMaker AI with your Aurora MySQL DB cluster

To use SageMaker AI functionality from your Aurora MySQL DB cluster, you need to create stored functions that embed your calls to the SageMaker AI endpoint and its inference features. You do so by using MySQL's `CREATE FUNCTION` in generally the same way that you do for other processing tasks on your Aurora MySQL DB cluster.

To use models deployed in SageMaker AI for inference, you create user-defined functions using MySQL data definition language (DDL) statements for stored functions. Each stored function represents the SageMaker AI endpoint hosting the model. When you define such a function, you specify the input parameters to the model, the specific SageMaker AI endpoint to invoke, and the return type. The function returns the inference computed by the SageMaker AI endpoint after applying the model to the input parameters.

All Aurora machine learning stored functions return numeric types or `VARCHAR`. You can use any numeric type except `BIT`. Other types, such as `JSON`, `BLOB`, `TEXT`, and `DATE` aren't allowed.

The following example shows the `CREATE FUNCTION` syntax for working with SageMaker AI.

```
CREATE FUNCTION function_name (
     arg1 type1,
     arg2 type2, ...)
     [DEFINER = user]
  RETURNS mysql_type
  [SQL SECURITY { DEFINER | INVOKER } ]
  ALIAS Amazon_SAGEMAKER_INVOKE_ENDPOINT
```

```
  ENDPOINT NAME 'endpoint_name'
  [MAX_BATCH_SIZE max_batch_size];
```

This is an extension of the regular `CREATE FUNCTION` DDL statement. In the `CREATE FUNCTION` statement that defines the SageMaker AI function, you don't specify a function body. Instead, you specify the keyword `ALIAS` where the function body usually goes. Currently, Aurora machine learning only supports `aws_sagemaker_invoke_endpoint` for this extended syntax. You must specify the `endpoint_name` parameter. An SageMaker AI endpoint can have different characteristics for each model.

> **Note**
>
> For more information about `CREATE FUNCTION`, see CREATE PROCEDURE and CREATE FUNCTION Statements in the MySQL 8.0 Reference Manual.

The `max_batch_size` parameter is optional. By default, maximum batch size is 10,000. You can use this parameter in your function to restrict the maximum number of inputs processed in a batched request to SageMaker AI. The `max_batch_size` parameter can help to avoid an error caused by inputs that are too large, or to make SageMaker AI return a response more quickly. This parameter affects the size of an internal buffer used for SageMaker AI request processing. Specifying too large a value for `max_batch_size` might cause substantial memory overhead on your DB instance.

We recommend that you leave the `MANIFEST` setting at its default value of `OFF`. Although you can use the `MANIFEST ON` option, some SageMaker AI features can't directly use the CSV exported with this option. The manifest format is not compatible with the expected manifest format from SageMaker AI.

You create a separate stored function for each of your SageMaker AI models. This mapping of functions to models is required because an endpoint is associated with a specific model, and each model accepts different parameters. Using SQL types for the model inputs and the model output type helps to avoid type conversion errors passing data back and forth between the Amazon services. You can control who can apply the model. You can also control the runtime characteristics by specifying a parameter representing the maximum batch size.

Currently, all Aurora machine learning functions have the `NOT DETERMINISTIC` property. If you don't specify that property explicitly, Aurora sets `NOT DETERMINISTIC` automatically. This

requirement is because the SageMaker AI model can be changed without any notification to the database. If that happens, calls to an Aurora machine learning function might return different results for the same input within a single transaction.

You can't use the characteristics `CONTAINS SQL`, `NO SQL`, `READS SQL DATA`, or `MODIFIES SQL DATA` in your `CREATE FUNCTION` statement.

Following is an example usage of invoking an SageMaker AI endpoint to detect anomalies. There is an SageMaker AI endpoint `random-cut-forest-model`. The corresponding model is already trained by the `random-cut-forest` algorithm. For each input, the model returns an anomaly score. This example shows the data points whose score is greater than 3 standard deviations (approximately the 99.9th percentile) from the mean score.

```
CREATE FUNCTION anomaly_score(value real) returns real
  alias aws_sagemaker_invoke_endpoint endpoint name 'random-cut-forest-model-demo';

set @score_cutoff = (select avg(anomaly_score(value)) + 3 * std(anomaly_score(value))
 from nyc_taxi);

select *, anomaly_detection(value) score from nyc_taxi
  where anomaly_detection(value) > @score_cutoff;
```

Character set requirement for SageMaker AI functions that return strings

We recommend specifying a character set of `utf8mb4` as the return type for your SageMaker AI functions that return string values. If that isn't practical, use a large enough string length for the return type to hold a value represented in the `utf8mb4` character set. The following example shows how to declare the `utf8mb4` character set for your function.

```
CREATE FUNCTION my_ml_func(...) RETURNS VARCHAR(5) CHARSET utf8mb4 ALIAS ...
```

Currently, each SageMaker AI function that returns a string uses the character set `utf8mb4` for the return value. The return value uses this character set even if your SageMaker AI function declares a different character set for its return type implicitly or explicitly. If your SageMaker AI function declares a different character set for the return value, the returned data might be silently truncated if you store it in a table column that isn't long enough. For example, a query with a `DISTINCT` clause creates a temporary table. Thus, the SageMaker AI function result might be truncated due to the way strings are handled internally during a query.

Exporting data to Amazon S3 for SageMaker AI model training (Advanced)

We recommend that you get started with Aurora machine learning and SageMaker AI by using some of the provided algorithms, and that the data scientists on your team provide you with the SageMaker AI endpoints that you can use with your SQL code. In the following, you can find minimal information about using your own Amazon S3 bucket with your your own SageMaker AI models and your Aurora MySQL DB cluster.

Machine learning consists of two major steps: training, and inference. To train SageMaker AI models, you export data to an Amazon S3 bucket. The Amazon S3 bucket is used by a Jupyter SageMaker AI notebook instance to train your model before it is deployed. You can use the `SELECT INTO OUTFILE S3` statement to query data from an Aurora MySQL DB cluster and save it directly into text files stored in an Amazon S3 bucket. Then the notebook instance consumes the data from the Amazon S3 bucket for training.

Aurora machine learning extends the existing `SELECT INTO OUTFILE` syntax in Aurora MySQL to export data to CSV format. The generated CSV file can be directly consumed by models that need this format for training purposes.

```
SELECT * INTO OUTFILE S3 's3_uri' [FORMAT {CSV|TEXT} [HEADER]] FROM table_name;
```

The extension supports the standard CSV format.

- Format `TEXT` is the same as the existing MySQL export format. This is the default format.
- Format `CSV` is a newly introduced format that follows the specification in RFC-4180.
- If you specify the optional keyword `HEADER`, the output file contains one header line. The labels in the header line correspond to the column names from the `SELECT` statement.
- You can still use the keywords `CSV` and `HEADER` as identifiers.

The extended syntax and grammar of `SELECT INTO` is now as follows:

```
INTO OUTFILE S3 's3_uri'
[CHARACTER SET charset_name]
[FORMAT {CSV|TEXT} [HEADER]]
[{FIELDS | COLUMNS}
  [TERMINATED BY 'string']
  [[OPTIONALLY] ENCLOSED BY 'char']
  [ESCAPED BY 'char']
```

```
]
[LINES
  [STARTING BY 'string']
  [TERMINATED BY 'string']
]
```

Performance considerations for using Aurora machine learning with Aurora MySQL

The Amazon Bedrock, Amazon Comprehend, and SageMaker AI services do most of the work when invoked by an Aurora machine learning function. That means that you can scale those resources as needed, independently. For your Aurora MySQL DB cluster, you can make your function calls as efficient as possible. Following, you can find some performance considerations to note when working with Aurora machine learning.

Model and prompt

Performance when using Amazon Bedrock is highly dependent on the model and prompt that you use. Choose a model and prompt that are optimal for your use case.

Query cache

The Aurora MySQL query cache doesn't work for Aurora machine learning functions. Aurora MySQL doesn't store query results in the query cache for any SQL statements that call Aurora machine learning functions.

Batch optimization for Aurora machine learning function calls

The main Aurora machine learning performance aspect that you can influence from your Aurora cluster is the batch mode setting for calls to the Aurora machine learning stored functions. Machine learning functions typically require substantial overhead, making it impractical to call an external service separately for each row. Aurora machine learning can minimize this overhead by combining the calls to the external Aurora machine learning service for many rows into a single batch. Aurora machine learning receives the responses for all the input rows, and delivers the responses, one row at a time, to the query as it runs. This optimization improves the throughput and latency of your Aurora queries without changing the results.

When you create an Aurora stored function that's connected to an SageMaker AI endpoint, you define the batch size parameter. This parameter influences how many rows are transferred

for every underlying call to SageMaker AI. For queries that process large numbers of rows, the overhead to make a separate SageMaker AI call for each row can be substantial. The larger the data set processed by the stored procedure, the larger you can make the batch size.

If the batch mode optimization can be applied to an SageMaker AI function, you can tell by checking the query plan produced by the `EXPLAIN PLAN` statement. In this case, the `extra` column in the execution plan includes `Batched machine learning`. The following example shows a call to an SageMaker AI function that uses batch mode.

```
mysql> CREATE FUNCTION anomaly_score(val real) returns real alias
 aws_sagemaker_invoke_endpoint endpoint name 'my-rcf-model-20191126';
Query OK, 0 rows affected (0.01 sec)

mysql> explain select timestamp, value, anomaly_score(value) from nyc_taxi;
+----+-------------+----------+------------+------+---------------+------+---------
+------+------+----------+-------------------------+
| id | select_type | table    | partitions | type | possible_keys | key  | key_len |
 ref  | rows | filtered | Extra                   |
+----+-------------+----------+------------+------+---------------+------+---------
+------+------+----------+-------------------------+
|  1 | SIMPLE      | nyc_taxi | NULL       | ALL  | NULL          | NULL | NULL    |
 NULL |   48 |   100.00 | Batched machine learning |
+----+-------------+----------+------------+------+---------------+------+---------
+------+------+----------+-------------------------+
1 row in set, 1 warning (0.01 sec)
```

When you call one of the built-in Amazon Comprehend functions, you can control the batch size by specifying the optional `max_batch_size` parameter. his parameter restricts the maximum number of `input_text` values processed in each batch. By sending multiple items at once, it reduces the number of round trips between Aurora and Amazon Comprehend. Limiting the batch size is useful in situations such as a query with a `LIMIT` clause. By using a small value for `max_batch_size`, you can avoid invoking Amazon Comprehend more times than you have input texts.

The batch optimization for evaluating Aurora machine learning functions applies in the following cases:

- Function calls within the select list or the `WHERE` clause of `SELECT` statements
- Function calls in the `VALUES` list of `INSERT` and `REPLACE` statements
- SageMaker AI functions in `SET` values in `UPDATE` statements:

```
INSERT INTO MY_TABLE (col1, col2, col3) VALUES
  (ML_FUNC(1), ML_FUNC(2), ML_FUNC(3)),
  (ML_FUNC(4), ML_FUNC(5), ML_FUNC(6));
UPDATE MY_TABLE SET col1 = ML_FUNC(col2), SET col3 = ML_FUNC(col4) WHERE ...;
```

Monitoring Aurora machine learning

You can monitor Aurora machine learning batch operations by querying several global variables, as shown in the following example.

```
show status like 'Aurora_ml%';
```

You can reset the status variables by using a `FLUSH STATUS` statement. Thus, all of the figures represent totals, averages, and so on, since the last time the variable was reset.

`Aurora_ml_logical_request_cnt`

The number of logical requests that the DB instance has evaluated to be sent to the Aurora machine learning services since the last status reset. Depending on whether batching has been used, this value can be higher than `Aurora_ml_actual_request_cnt`.

`Aurora_ml_logical_response_cnt`

The aggregate response count that Aurora MySQL receives from the Aurora machine learning services across all queries run by users of the DB instance.

`Aurora_ml_actual_request_cnt`

The aggregate request count that Aurora MySQL makes to the Aurora machine learning services across all queries run by users of the DB instance.

`Aurora_ml_actual_response_cnt`

The aggregate response count that Aurora MySQL receives from the Aurora machine learning services across all queries run by users of the DB instance.

`Aurora_ml_cache_hit_cnt`

The aggregate internal cache hit count that Aurora MySQL receives from the Aurora machine learning services across all queries run by users of the DB instance.

`Aurora_ml_retry_request_cnt`

The number of retried requests that the DB instance has sent to the Aurora machine learning services since the last status reset.

`Aurora_ml_single_request_cnt`

The aggregate count of Aurora machine learning functions that are evaluated by non-batch mode across all queries run by users of the DB instance.

For information about monitoring the performance of the SageMaker AI operations called from Aurora machine learning functions, see Monitor Amazon SageMaker AI.

Using Amazon Aurora machine learning with Aurora PostgreSQL

By using Amazon Aurora machine learning with your Aurora PostgreSQL DB cluster, you can use Amazon Comprehend or Amazon SageMaker AI or Amazon Bedrock, depending on your needs. These services each support specific machine learning use cases.

Aurora machine learning is supported in certain Amazon Web Services Regions and for specific versions of Aurora PostgreSQL only. Before trying to set up Aurora machine learning, check availability for your Aurora PostgreSQL version and your Region. For details, see Aurora machine learning with Aurora PostgreSQL.

Topics

- Requirements for using Aurora machine learning with Aurora PostgreSQL
- Supported features and limitations of Aurora machine learning with Aurora PostgreSQL
- Setting up your Aurora PostgreSQL DB cluster to use Aurora machine learning
- Using Amazon Bedrock with your Aurora PostgreSQL DB cluster
- Using Amazon Comprehend with your Aurora PostgreSQL DB cluster
- Using SageMaker AI with your Aurora PostgreSQL DB cluster
- Exporting data to Amazon S3 for SageMaker AI model training (Advanced)
- Performance considerations for using Aurora machine learning with Aurora PostgreSQL
- Monitoring Aurora machine learning

Requirements for using Aurora machine learning with Aurora PostgreSQL

Amazon machine learning services are managed services that are set up and run in their own production environments. Aurora machine learning supports integration with Amazon Comprehend, SageMaker AI, and Amazon Bedrock. Before trying to set up your Aurora PostgreSQL DB cluster to use Aurora machine learning, be sure you understand the following requirements and prerequisites.

- The Amazon Comprehend, SageMaker AI, and Amazon Bedrock services must be running in the same Amazon Web Services Region as your Aurora PostgreSQL DB cluster. You can't use Amazon Comprehend or SageMaker AI or Amazon Bedrock services from an Aurora PostgreSQL DB cluster in a different Region.
- If your Aurora PostgreSQL DB cluster is in a different virtual public cloud (VPC) based on the Amazon VPC service than your Amazon Comprehend and SageMaker AI services, the VPC's Security group needs to allow outbound connections to the target Aurora machine learning service. For more information, see Enabling network communication from Amazon Aurora to other Amazon services.
- For SageMaker AI, the machine learning components that you want to use for inferences must be set up and ready to use. During the configuration process for your Aurora PostgreSQL DB cluster, you need to have the Amazon Resource Name (ARN) of the SageMaker AI endpoint available. The data scientists on your team are likely best able to handle working with SageMaker AI to prepare the models and handle the other such tasks. To get started with Amazon SageMaker AI, see Get Started with Amazon SageMaker AI. For more information about inferences and endpoints, see Real-time inference.
- For Amazon Bedrock, you need to have the model ID of the Bedrock models that you want to use for inferences available during the configuration process of your Aurora PostgreSQL DB cluster. The data scientists on your team are likely best able to work with Bedrock to decide which models to use, fine tune them if needed and handle other such tasks. To get started with Amazon Bedrock, see How to setup Bedrock.
- Amazon Bedrock users need to request access to models before they are available for use. If you want to add additional models for text, chat, and image generation, you need to request access to models in Amazon Bedrock. For more information, see Model access.

Supported features and limitations of Aurora machine learning with Aurora PostgreSQL

Aurora machine learning supports any SageMaker AI endpoint that can read and write the comma-separated value (CSV) format through a `ContentType` value of `text/csv`. The built-in SageMaker AI algorithms that currently accept this format are the following.

- Linear Learner
- Random Cut Forest
- XGBoost

  To learn more about these algorithms, see Choose an Algorithm in the *Amazon SageMaker AI Developer Guide*.

When using Amazon Bedrock with Aurora machine learning, the following limitations apply:

- The user-defined functions (UDFs) provide a native way to interact with Amazon Bedrock. The UDFs don't have specific request or response requirements, so they can use any model.
- You can use UDFs to build any work flow desired. For example, you can combine base primitives such as `pg_cron` to run a query, fetch data, generate inferences, and write to tables to serve queries directly.
- UDFs don't support batched or parallel calls.
- The Aurora Machine Learning extension doesn't support vector interfaces. As part of the extension, a function is available to output the embeddings of model's response in the `float8[]` format to store those embeddings in Aurora. For more information on the usage of `float8[]`, see Using Amazon Bedrock with your Aurora PostgreSQL DB cluster.

Setting up your Aurora PostgreSQL DB cluster to use Aurora machine learning

For Aurora machine learning to work with your Aurora PostgreSQL DB cluster, you need to create an Amazon Identity and Access Management (IAM) role for each of the services that you want to use. The IAM role allows your Aurora PostgreSQL DB cluster to use the Aurora machine learning service on the cluster's behalf. You also need to install the Aurora machine learning extension.

In the following topics, you can find setup procedures for each of these Aurora machine learning services.

Topics

- Setting up Aurora PostgreSQL to use Amazon Bedrock
- Setting up Aurora PostgreSQL to use Amazon Comprehend
- Setting up Aurora PostgreSQL to use Amazon SageMaker AI
  - Setting up Aurora PostgreSQL to use Amazon S3 for SageMaker AI (Advanced)
- Installing the Aurora machine learning extension

Setting up Aurora PostgreSQL to use Amazon Bedrock


In the procedure following, you first create the IAM role and policy that gives your Aurora PostgreSQL permission to use Amazon Bedrock on the cluster's behalf. You then attach the policy to an IAM role that your Aurora PostgreSQL DB cluster uses to work with Amazon Bedrock. For simplicity's sake, this procedure uses the Amazon Web Services Management Console to complete all tasks.

To set up your Aurora PostgreSQL DB cluster to use Amazon Bedrock


1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. Open the IAM console at https://console.amazonaws.cn/iam/.
3. Choose **Policies** (under Access management) on the Amazon Identity and Access Management (IAM) Console menu.

    a. Choose **Create policy**. In the Visual editor page, choose **Service** and then enter **Bedrock** in the Select a service field. Expand the Read access level. Choose **InvokeModel** from the Amazon Bedrock read settings.


    b. Choose the Foundation/Provisioned model you want to grant read access via the policy.

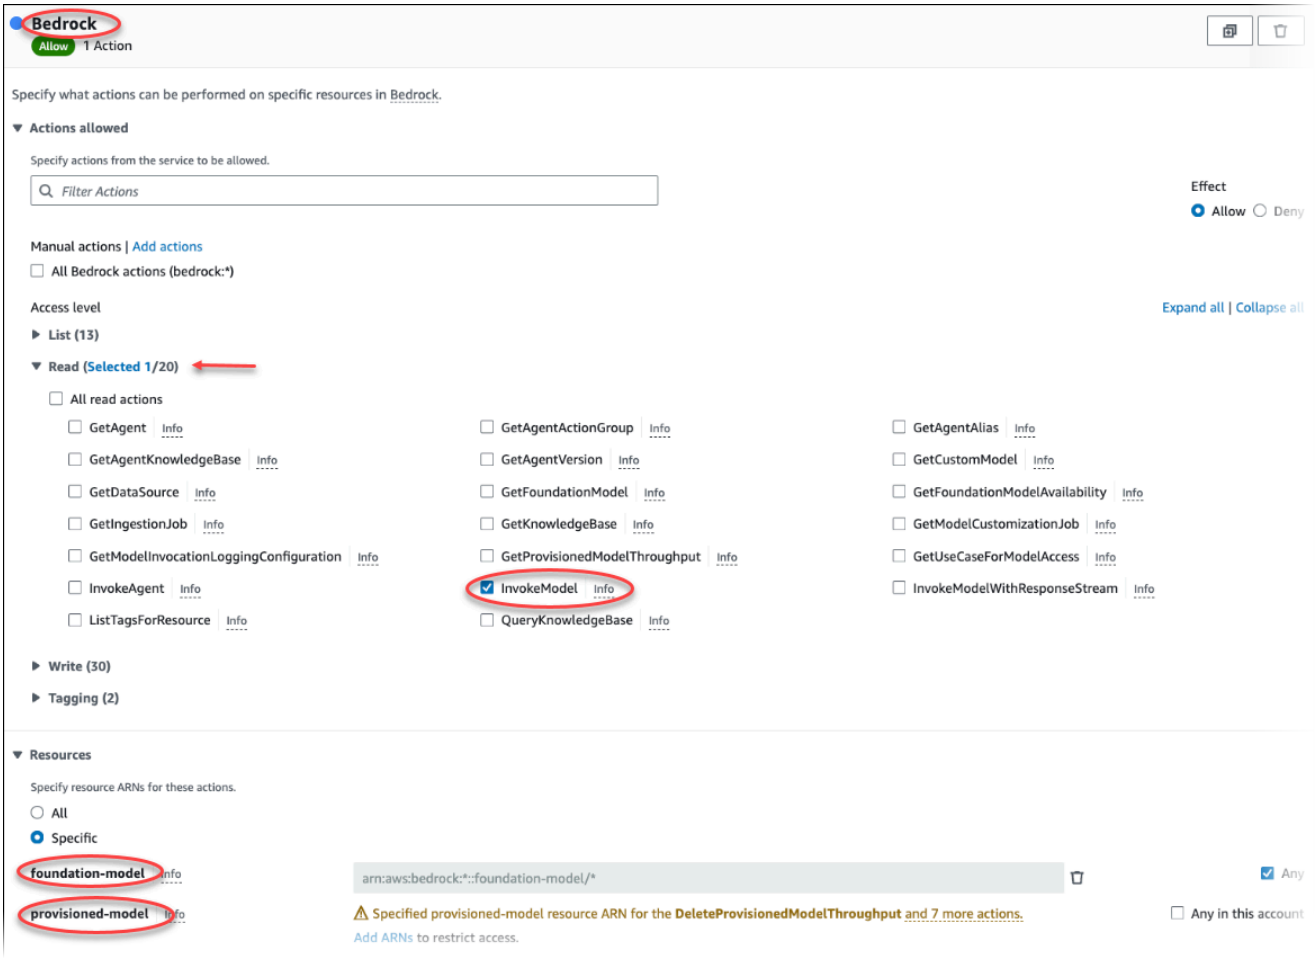

4. Choose **Next: Tags** and define any tags (this is optional). Choose **Next: Review**. Enter a Name for the policy and description, as shown in the image.

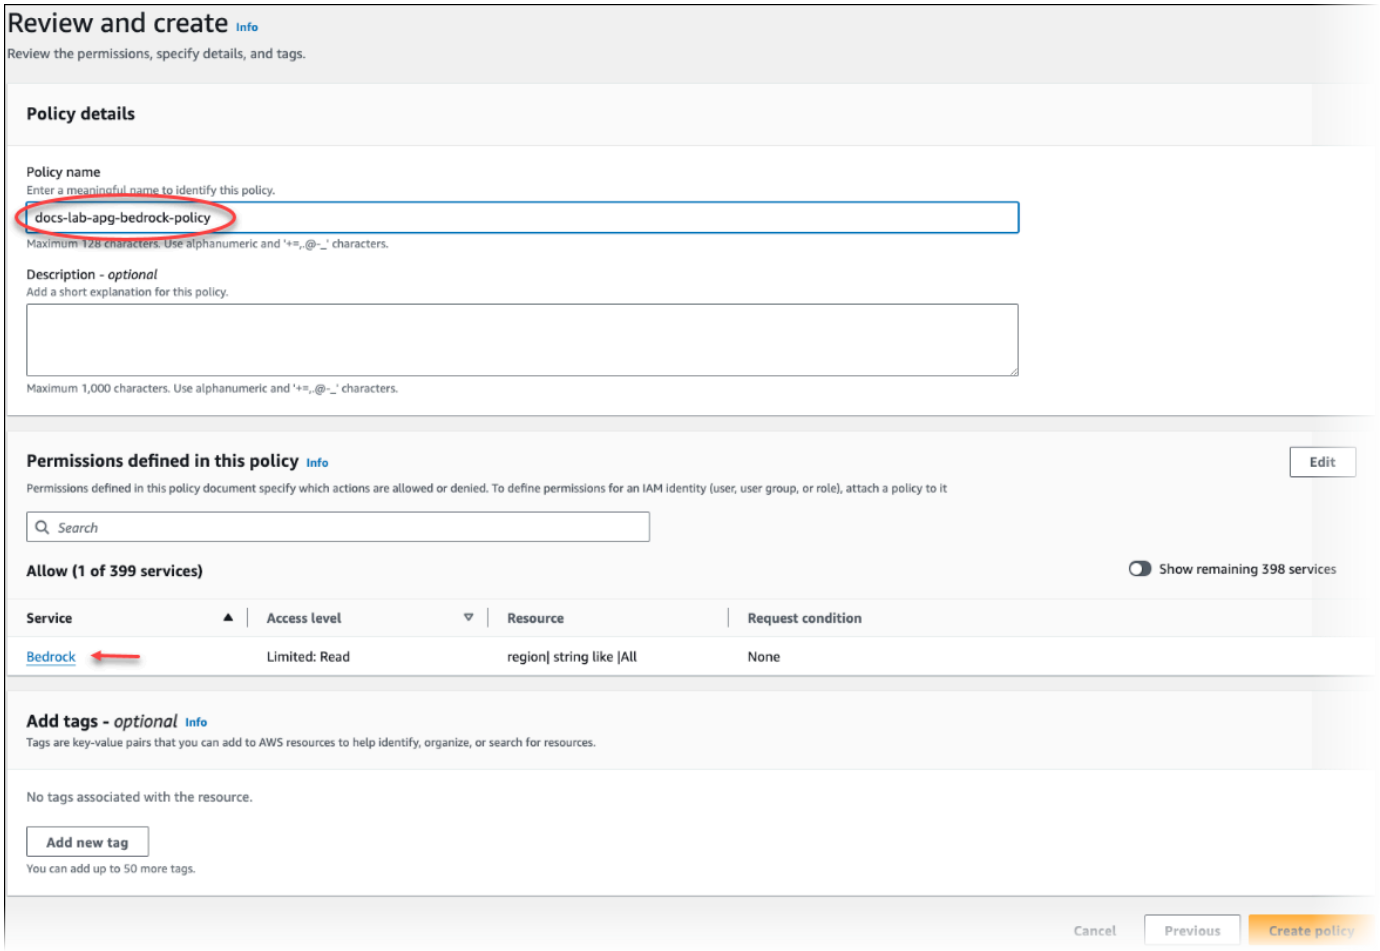


5. Choose **Create policy**. The Console displays an alert when the policy has been saved. You can find it in the list of Policies.
6. Choose **Roles** (under Access management) on the IAM Console.
7. Choose **Create role**.
8. On the Select trusted entity page, choose the **Amazon service** tile, and then choose **RDS** to open the selector.
9. Choose **RDS – Add Role to Database**.

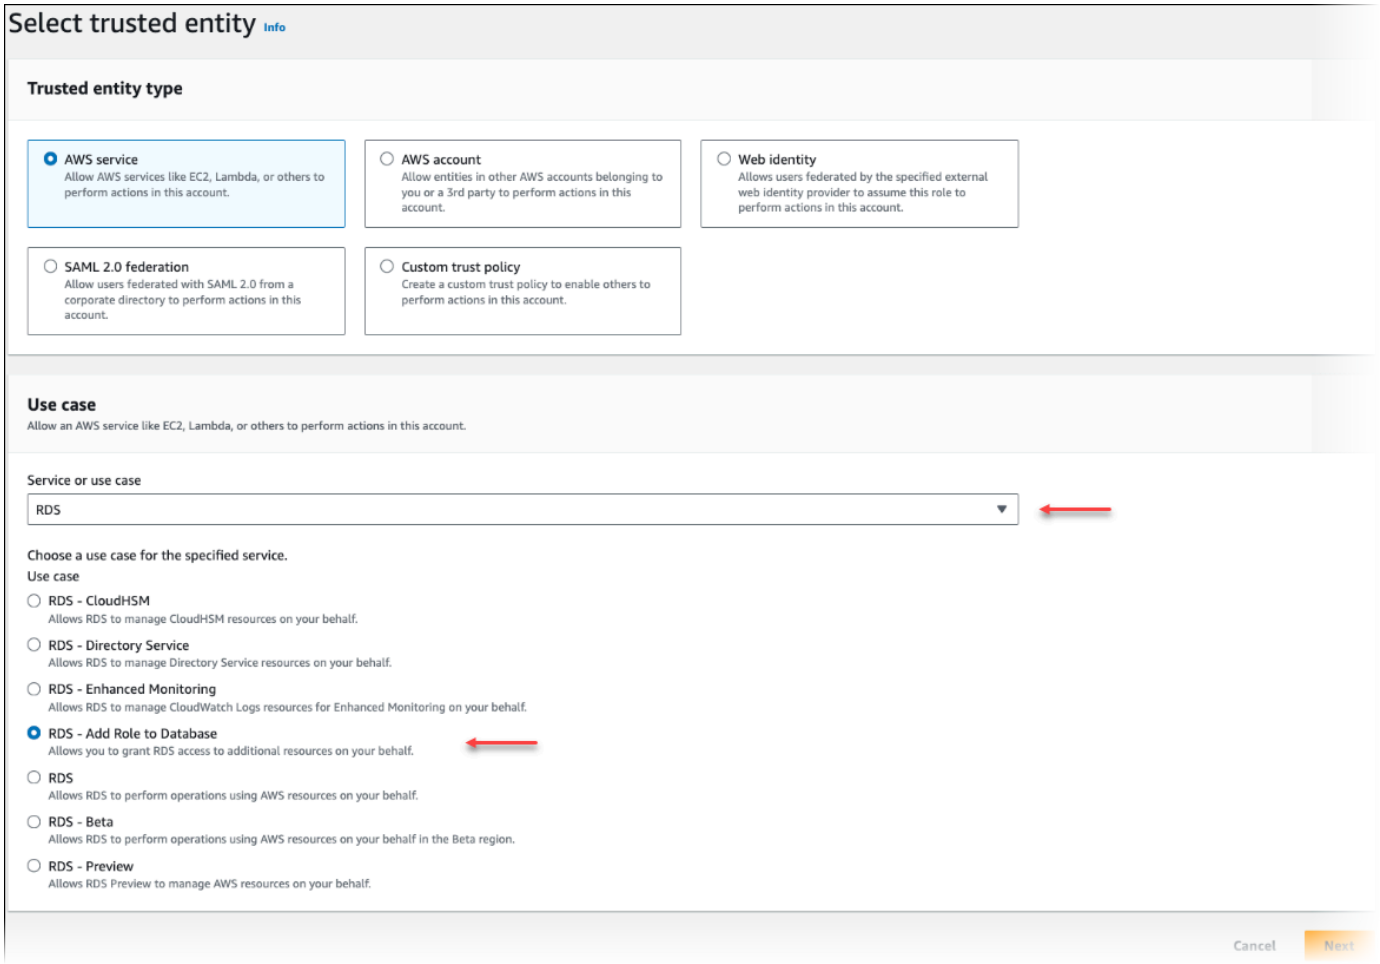

10. Choose **Next**. On the Add permissions page, find the policy that you created in the previous step and choose it from among those listed. Choose **Next**.
11. **Next: Review**. Enter a name for the IAM role and a description.
12. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
13. Navigate to the Amazon Web Services Region where your Aurora PostgreSQL DB cluster is located.
14. In the navigation pane, choose **Databases**, and then choose the Aurora PostgreSQL DB cluster that you want to use with Bedrock.
15. Choose the **Connectivity & security** tab and scroll to find the **Manage IAM roles** section of the page. From the **Add IAM roles to this cluster** selector, choose the role that you created in the previous steps. In the **Feature** selector, choose Bedrock, and then choose **Add role**.

The role (with its policy) are associated with the Aurora PostgreSQL DB cluster. When the process completes, the role is listed in the Current IAM roles for this cluster listing, as shown following.

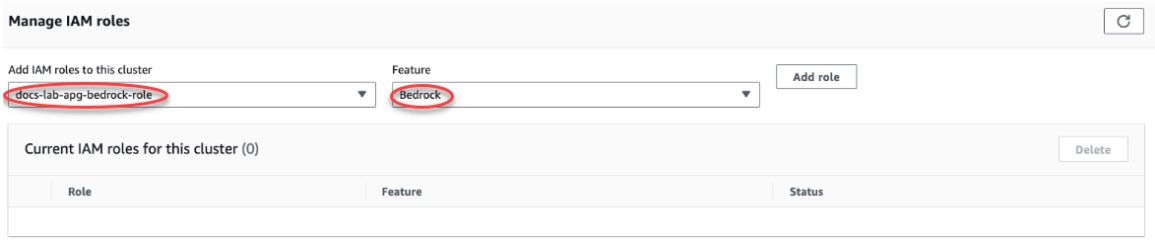


The IAM setup for Amazon Bedrock is complete. Continue setting up your Aurora PostgreSQL to work with Aurora machine learning by installing the extension as detailed in Installing the Aurora machine learning extension

Setting up Aurora PostgreSQL to use Amazon Comprehend


In the procedure following, you first create the IAM role and policy that gives your Aurora PostgreSQL permission to use Amazon Comprehend on the cluster's behalf. You then attach the policy to an IAM role that your Aurora PostgreSQL DB cluster uses to work with Amazon Comprehend For simplicity's sake, this procedure uses the Amazon Web Services Management Console to complete all tasks.

To set up your Aurora PostgreSQL DB cluster to use Amazon Comprehend


1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. Open the IAM console at https://console.amazonaws.cn/iam/.
3. Choose **Policies** (under Access management) on the Amazon Identity and Access Management (IAM) Console menu.

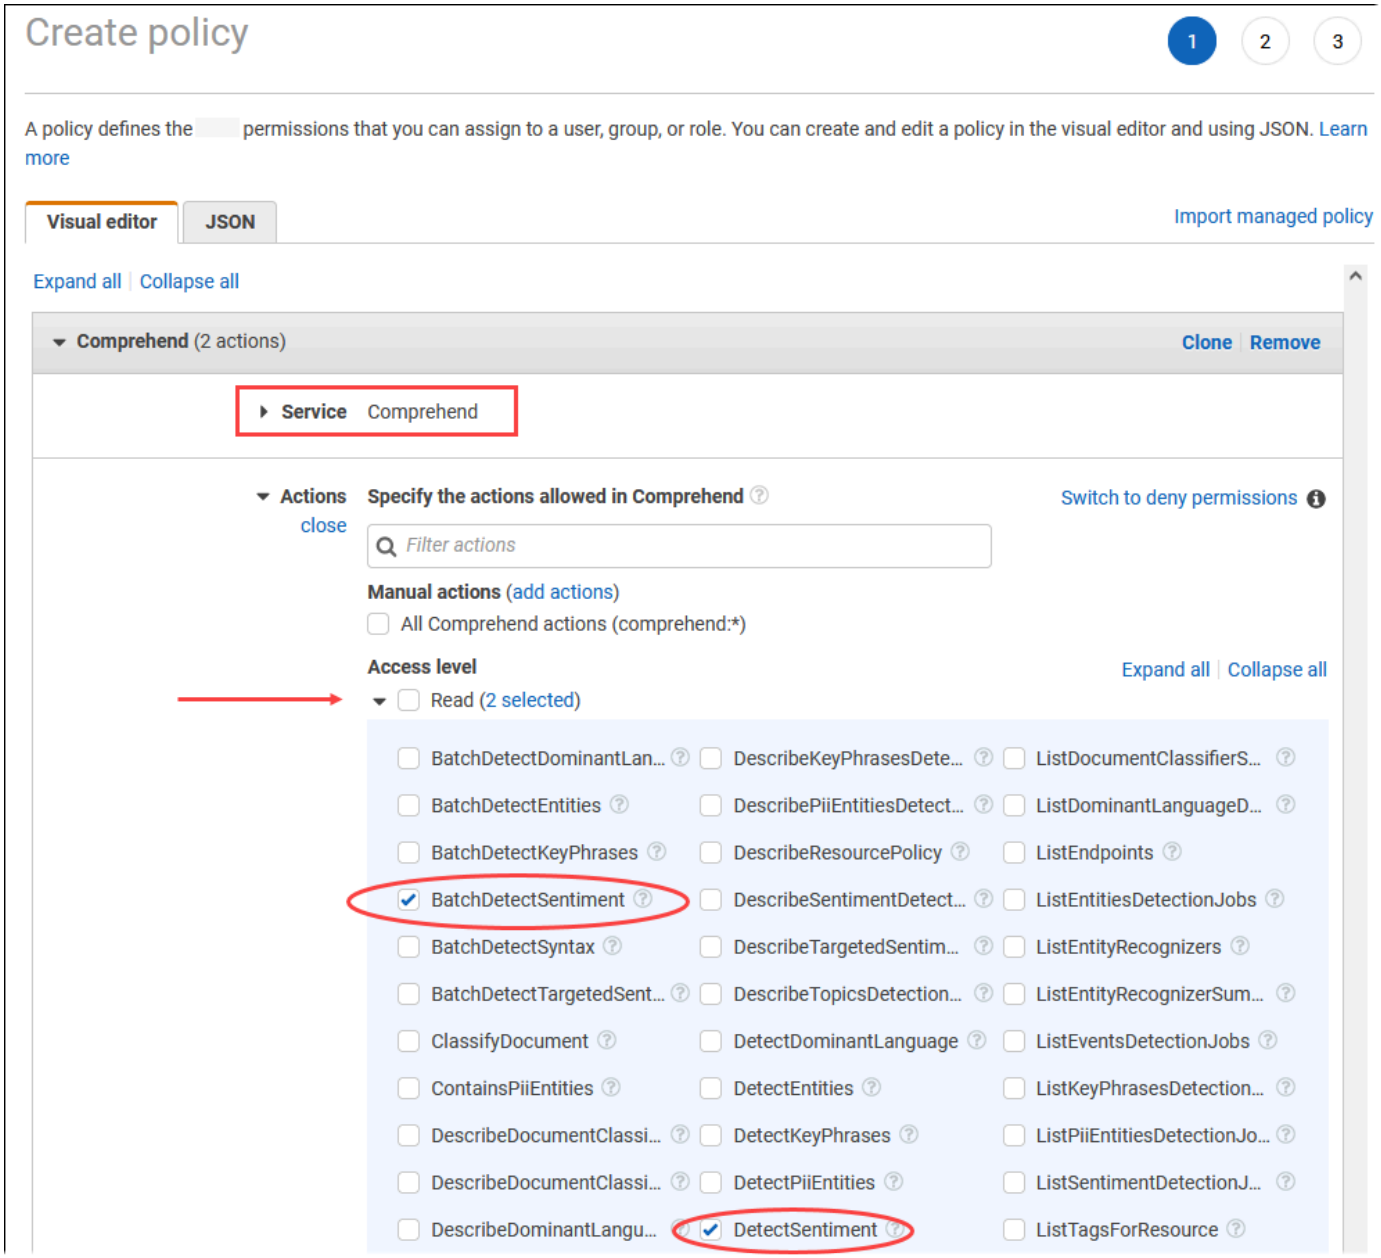

4. Choose **Create policy**. In the Visual editor page, choose **Service** and then enter **Comprehend** in the Select a service field. Expand the Read access level. Choose **BatchDetectSentiment** and **DetectSentiment** from the Amazon Comprehend read settings.
5. Choose **Next: Tags** and define any tags (this is optional). Choose **Next: Review**. Enter a Name for the policy and description, as shown in the image.

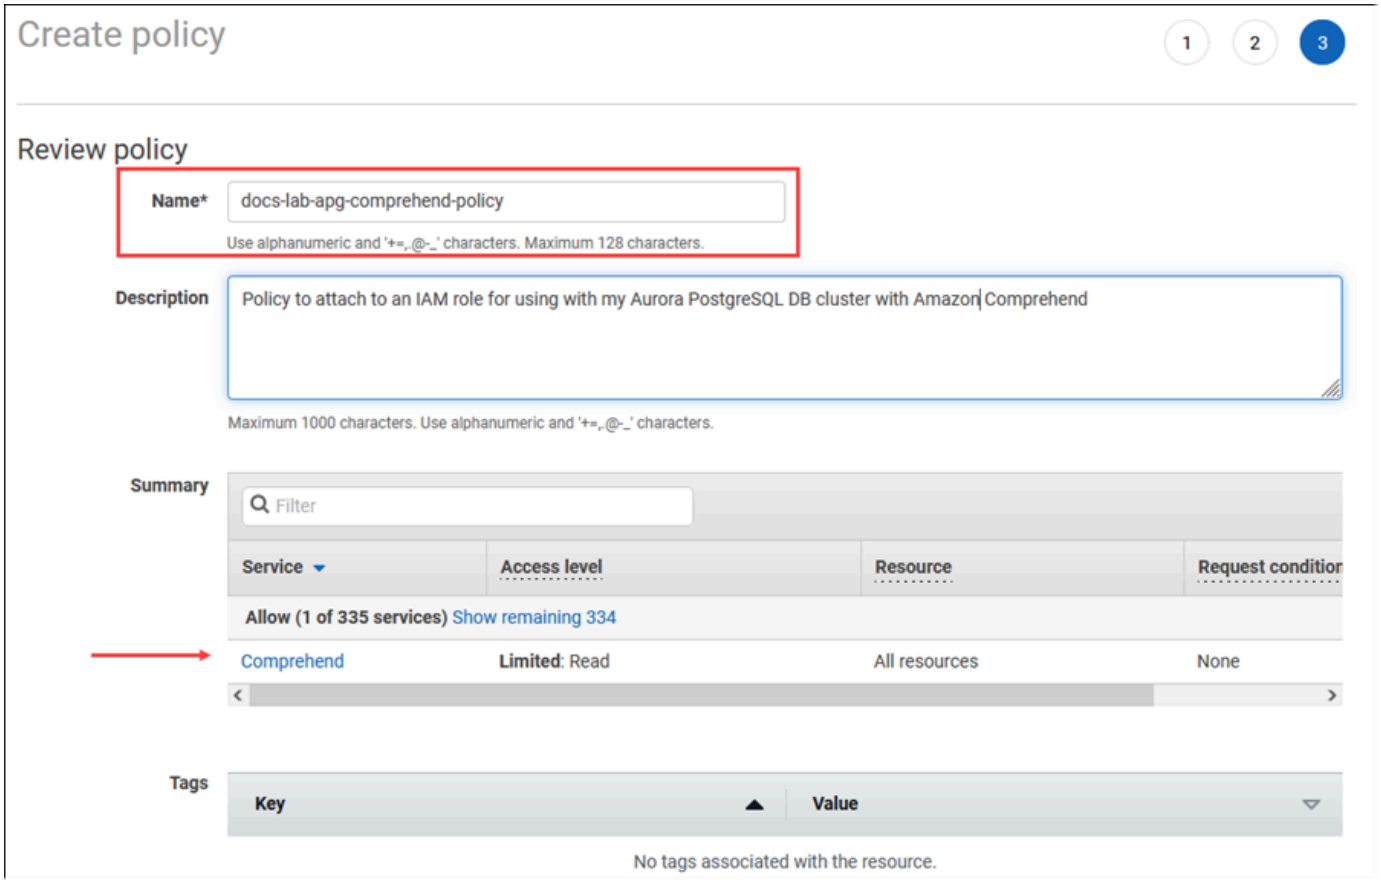


6. Choose **Create policy**. The Console displays an alert when the policy has been saved. You can find it in the list of Policies.
7. Choose **Roles** (under Access management) on the IAM Console.
8. Choose **Create role**.
9. On the Select trusted entity page, choose the **Amazon service** tile, and then choose **RDS** to open the selector.
10. Choose **RDS – Add Role to Database**.

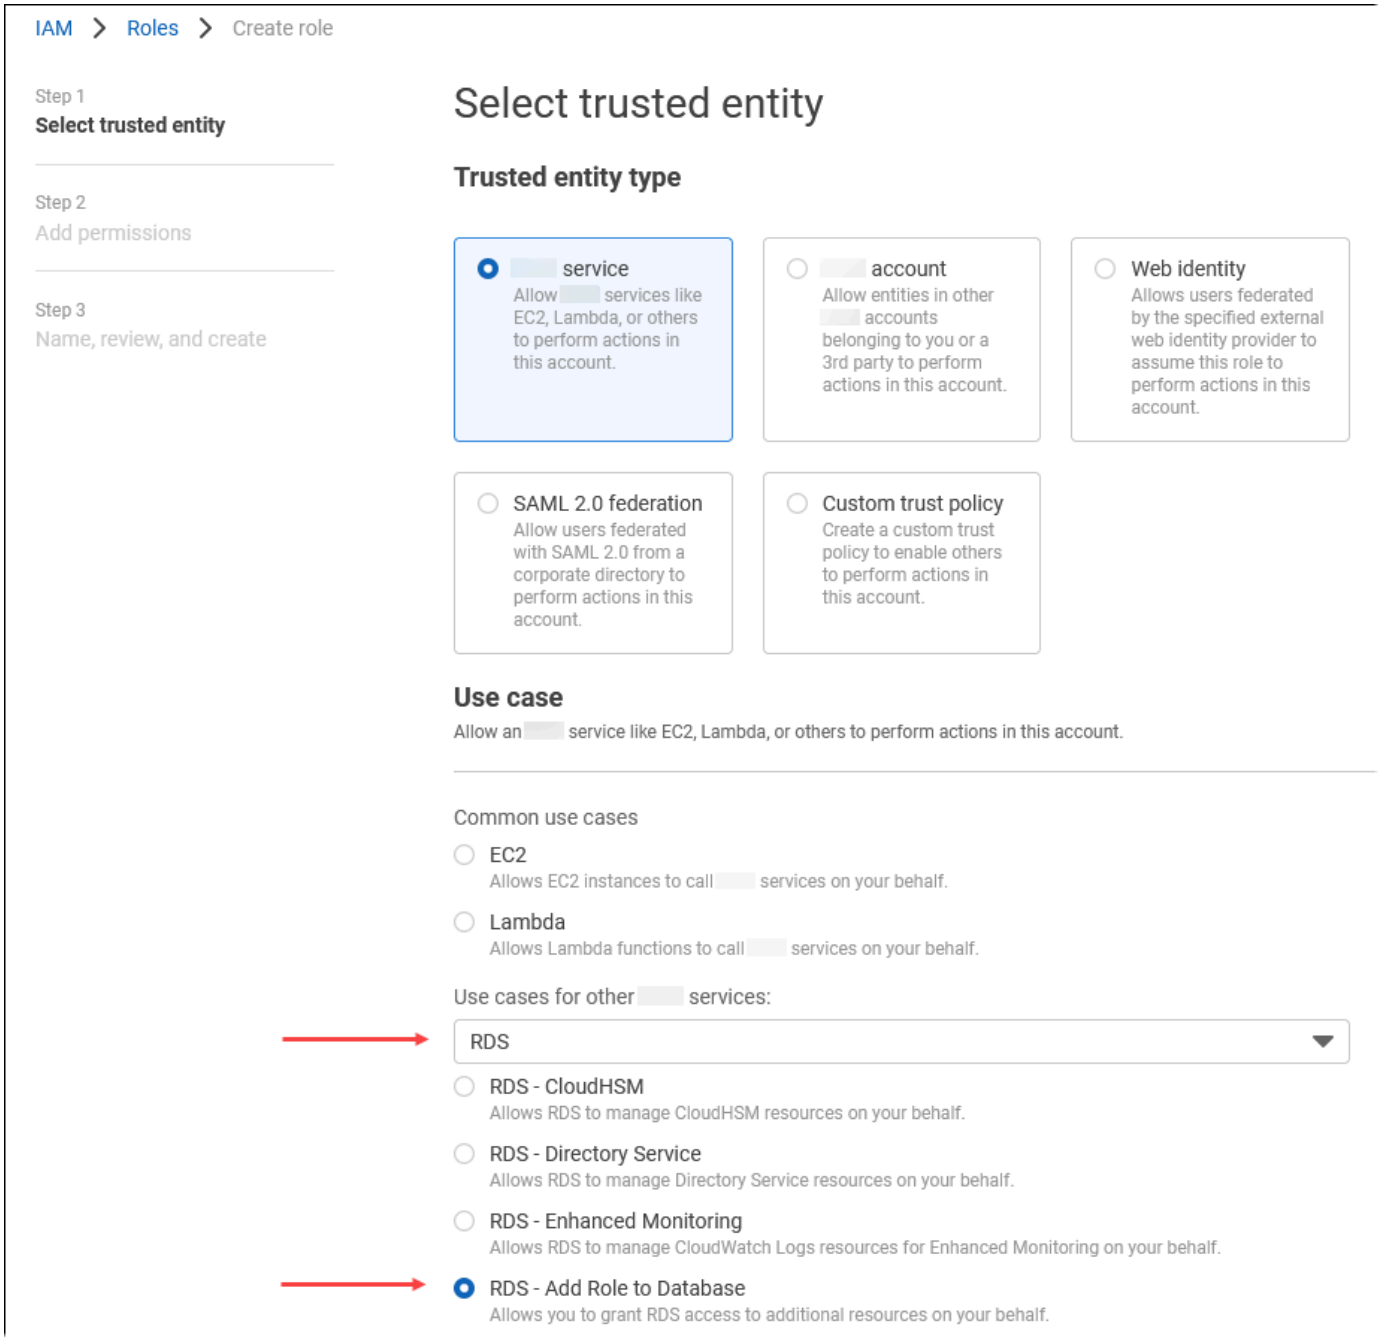

11. Choose **Next**. On the Add permissions page, find the policy that you created in the previous step and choose it from among those listed. Choose **Next**
12. **Next: Review**. Enter a name for the IAM role and a description.
13. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
14. Navigate to the Amazon Web Services Region where your Aurora PostgreSQL DB cluster is located.

15. In the navigation pane, choose **Databases**, and then choose the Aurora PostgreSQL DB cluster that you want to use with Amazon Comprehend.
16. Choose the **Connectivity & security** tab and scroll to find the **Manage IAM roles** section of the page. From the **Add IAM roles to this cluster** selector, choose the role that you created in the previous steps. In the **Feature** selector, choose Comprehend, and then choose **Add role**.

The role (with its policy) are associated with the Aurora PostgreSQL DB cluster. When the process completes, the role is listed in the Current IAM roles for this cluster listing, as shown following.

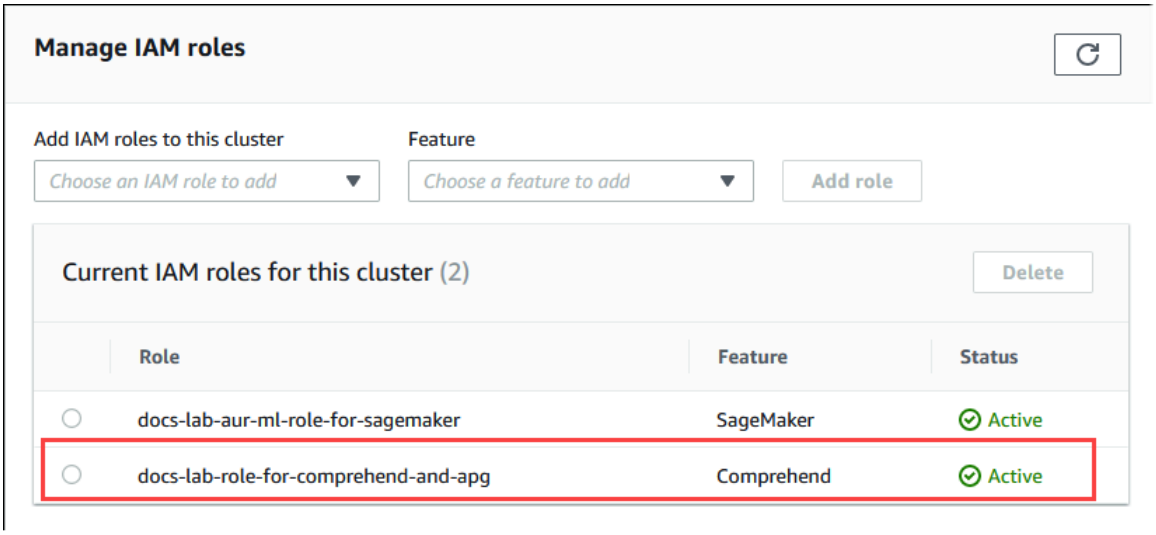

The IAM setup for Amazon Comprehend is complete. Continue setting up your Aurora PostgreSQL to work with Aurora machine learning by installing the extension as detailed in Installing the Aurora machine learning extension


Setting up Aurora PostgreSQL to use Amazon SageMaker AI

Before you can create the IAM policy and role for your Aurora PostgreSQL DB cluster, you need to have your SageMaker AI model setup and your endpoint available.

To set up your Aurora PostgreSQL DB cluster to use SageMaker AI

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. Choose **Policies** (under Access management) on the Amazon Identity and Access Management (IAM) Console menu, and then choose **Create policy**. In the Visual editor, choose **SageMaker** for the Service. For Actions, open the Read selector (under Access level) and choose **InvokeEndpoint**. When you this, a warning icon displays.

3. Open the Resources selector and choose the **Add ARN to restrict access** link under the Specify endpoint resource ARN for the InvokeEndpoint action.
4. Enter the Amazon Web Services Region of your SageMaker AI resources and the name of your endpoint. Your Amazon account is prefilled.

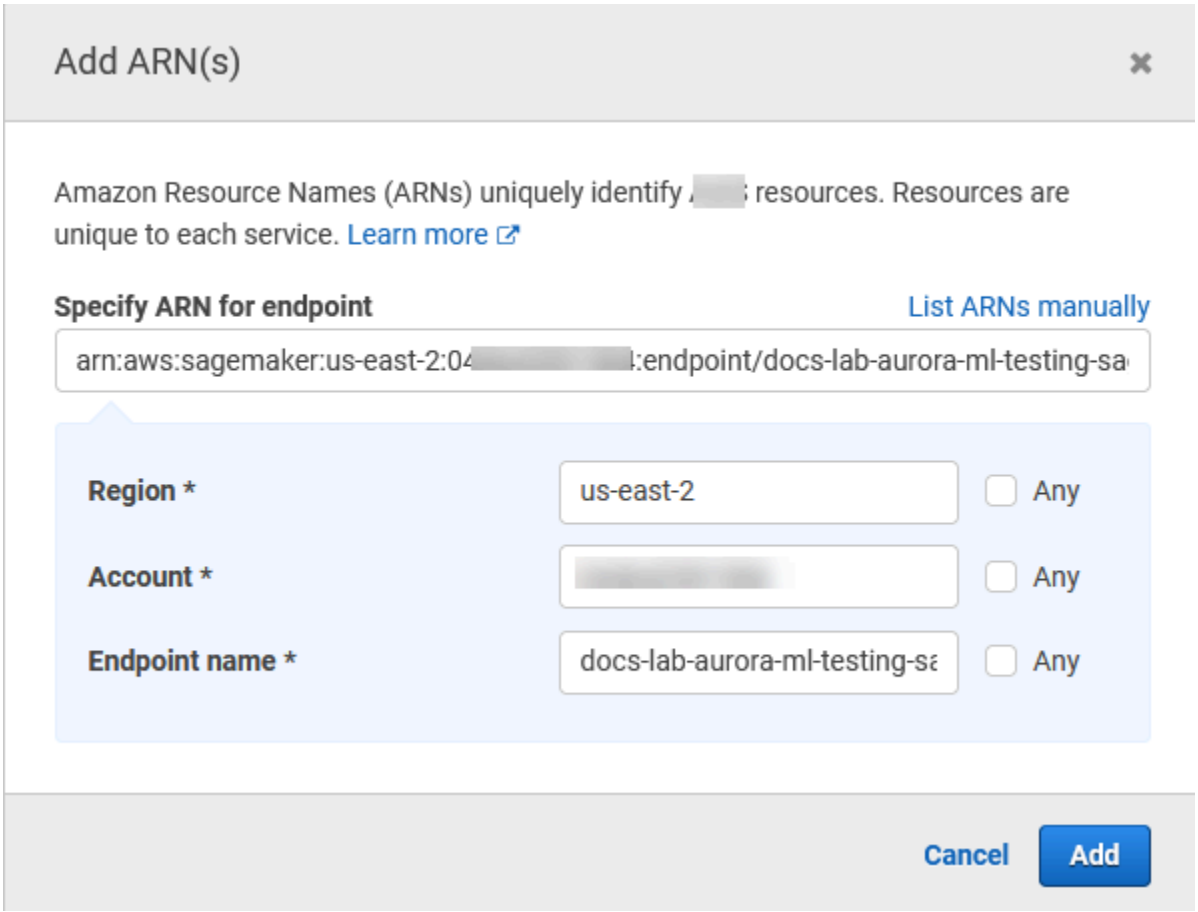

5. Choose **Add** to save. Choose **Next: Tags** and **Next: Review** to get to the last page of the policy creation process.
6. Enter a Name and Description for this policy, and then choose **Create policy**. The policy is created and is added to the Policies list. You see an alert in the Console as this occurs.
7. On the IAM Console, choose **Roles**.
8. Choose **Create role**.
9. On the Select trusted entity page, choose the **Amazon service** tile, and then choose **RDS** to open the selector.
10. Choose **RDS – Add Role to Database**.
11. Choose **Next**. On the Add permissions page, find the policy that you created in the previous step and choose it from among those listed. Choose **Next**

12. **Next: Review**. Enter a name for the IAM role and a description.
13. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
14. Navigate to the Amazon Web Services Region where your Aurora PostgreSQL DB cluster is located.
15. In the navigation pane, choose **Databases**, and then choose the Aurora PostgreSQL DB cluster that you want to use with SageMaker AI.
16. Choose the **Connectivity & security** tab and scroll to find the **Manage IAM roles** section of the page. From the **Add IAM roles to this cluster** selector, choose the role that you created in the previous steps. In the **Feature** selector, choose SageMaker AI, and then choose **Add role**.

The role (with its policy) are associated with the Aurora PostgreSQL DB cluster. When the process completes, the role is listed in the Current IAM roles for this cluster listing.

The IAM setup for SageMaker AI is complete. Continue setting up your Aurora PostgreSQL to work with Aurora machine learning by installing the extension as detailed in Installing the Aurora machine learning extension.

Setting up Aurora PostgreSQL to use Amazon S3 for SageMaker AI (Advanced)

To use SageMaker AI with your own models rather than using the pre-built components provided by SageMaker AI, you need to set up an Amazon Simple Storage Service (Amazon S3) bucket for Aurora PostgreSQL DB cluster to use. This is an advanced topic, and isn't fully documented in this *Amazon Aurora User Guide*. The general process is the same as for integrating support for SageMaker AI, as follows.

1. Create the IAM policy and role for Amazon S3.
2. Add the IAM role and the Amazon S3 import or export as a feature on the Connectivity & security tab of your Aurora PostgreSQL DB cluster.
3. Add the ARN of the role to your custom DB cluster parameter group for your Aurora DB cluster.

For basic usage information, see Exporting data to Amazon S3 for SageMaker AI model training (Advanced).

Installing the Aurora machine learning extension

The Aurora machine learning extensions `aws_ml 1.0` provides two functions that you can use to invoke Amazon Comprehend, SageMaker AI services and `aws_ml 2.0` provides two additional

functions that you can use to invoke Amazon Bedrock services. Installing these extensions on your Aurora PostgreSQL DB cluster also creates an administrative role for the feature.

> **Note**
>
> Using these functions depends on having the IAM setup for the Aurora machine learning service (Amazon Comprehend, SageMaker AI, Amazon Bedrock) complete, as detailed in Setting up your Aurora PostgreSQL DB cluster to use Aurora machine learning.

- **aws_comprehend.detect_sentiment** – You use this function to apply sentiment analysis to text stored in in the database on your Aurora PostgreSQL DB cluster.
- **aws_sagemaker.invoke_endpoint** – You use this function in your SQL code to communicate with the SageMaker AI endpoint from your cluster.
- **aws_bedrock.invoke_model** – You use this function in your SQL code to communicate with the Bedrock Models from your cluster. The response of this function will be in the format of a TEXT, so if a model responds in the format of a JSON body then the output of this function will be relayed in the format of a string to the end user.
- **aws_bedrock.invoke_model_get_embeddings** – You use this function in your SQL code to invoke Bedrock Models that return output embeddings within a JSON response. This can be leveraged when you want to extract the embeddings directly associated with the json-key to streamline the response with any self-managed workflows.

To install the Aurora machine learning extension in your Aurora PostgreSQL DB cluster

- Use `psql` to connect to the writer instance of your Aurora PostgreSQL DB cluster. Connect to the specific database in which to install the `aws_ml` extension.

```
psql --host=cluster-instance-1.111122223333.aws-region.rds.amazonaws.com --
port=5432 --username=postgres --password --dbname=labdb
```

```
labdb=> CREATE EXTENSION IF NOT EXISTS aws_ml CASCADE;
NOTICE:  installing required extension "aws_commons"
CREATE EXTENSION
labdb=>
```

Installing the aws_ml extensions also creates the aws_ml administrative role and three new schemas, as follows.

- aws_comprehend – Schema for the Amazon Comprehend service and source of the detect_sentiment function (aws_comprehend.detect_sentiment).
- aws_sagemaker – Schema for the SageMaker AI service and source of the invoke_endpoint function (aws_sagemaker.invoke_endpoint).
- aws_bedrock – Schema for the Amazon Bedrock service and source of the invoke_model(aws_bedrock.invoke_model) and invoke_model_get_embeddings(aws_bedrock.invoke_model_get_embeddings) functions.

The rds_superuser role is granted the aws_ml administrative role and is made the OWNER of these three Aurora machine learning schemas. To allow other database users to access the Aurora machine learning functions, the rds_superuser needs to grant EXECUTE privileges on the Aurora machine learning functions. By default, EXECUTE privileges are revoked from PUBLIC on the functions in the two Aurora machine learning schemas.

In a multi-tenant database configuration, you can prevent tenants from accessing Aurora machine learning functions by using REVOKE USAGE on the specific Aurora machine learning schema that you want to protect.

Using Amazon Bedrock with your Aurora PostgreSQL DB cluster

For Aurora PostgreSQL, Aurora machine learning provides the following Amazon Bedrock function for working with your text data. This function is available only after you install the aws_ml 2.0 extension and complete all setup procedures. For more information, see Setting up your Aurora PostgreSQL DB cluster to use Aurora machine learning.

aws_bedrock.invoke_model

This function takes text formatted in JSON as input and processes it for variety of models hosted on Amazon Bedrock and gets back the JSON text response from the model. This response could contain text, image, or embeddings. A summary of the function's documentation is as follows.

```
aws_bedrock.invoke_model(
   IN model_id      varchar,
```

```
    IN content_type  text,
    IN accept_type   text,
    IN model_input   text,
    OUT model_output varchar)
```

The inputs and outputs of this function are as follows.

- `model_id` – Identifier of the model.
- `content_type` – The type of the request to Bedrock's model.
- `accept_type` – The type of the response to expect from Bedrock's model. Usually application/JSON for most of the models.
- `model_input` – Prompts; a specific set of inputs to the model in the format as specified by content_type. For more information on the request format/structure the model accepts, see Inference parameters for foundation models.
- `model_output` – The Bedrock model's output as text.

The following example shows how to invoke a Anthropic Claude 2 model for Bedrock using invoke_model.

Example: A simple query using Amazon Bedrock functions

```
SELECT aws_bedrock.invoke_model (
    model_id    := 'anthropic.claude-v2',
    content_type:= 'application/json',
    accept_type := 'application/json',
    model_input := '{"prompt": "\n\nHuman: You are a helpful assistant that answers
 questions directly and only using the information provided in the context below.
\nDescribe the answer
    in detail.\n\nContext: %s \n\nQuestion: %s \n
\nAssistant:","max_tokens_to_sample":4096,"temperature":0.5,"top_k":250,"top_p":0.5,"stop_seque
[]}'
);
```

aws_bedrock.invoke_model_get_embeddings

The model output can point to vector embeddings for some cases. Given the response varies per model, another function invoke_model_get_embeddings can be leveraged which works exactly like invoke_model but outputs the embeddings by specifying the appropriate json-key.

```
aws_bedrock.invoke_model_get_embeddings(
   IN model_id      varchar,
   IN content_type  text,
   IN json_key      text,
   IN model_input   text,
   OUT model_output float8[])
```

The inputs and outputs of this function are as follows.

- `model_id` – Identifier of the model.
- `content_type` – The type of the request to Bedrock's model. Here, the accept_type is set to default value `application/json`.
- `model_input` – Prompts; a specific set of inputs to the Model in the format as specified by content_type. For more information on the request format/structure the Model accepts, see Inference parameters for foundation models.
- `json_key` – Reference to the field to extract the embedding from. This may vary if the embedding model changes.
- `model_output` – The Bedrock model's output as an array of embeddings having 16 bit decimals.

The following example shows how to generate an embedding using the Titan Embeddings G1 – Text embedding model for the phrase PostgreSQL I/O monitoring views.

Example: A simple query using Amazon Bedrock functions

```
SELECT aws_bedrock.invoke_model_get_embeddings(
   model_id      := 'amazon.titan-embed-text-v1',
   content_type  := 'application/json',
   json_key      := 'embedding',
   model_input   := '{ "inputText": "PostgreSQL I/O monitoring views"}') AS embedding;
```

Using Amazon Comprehend with your Aurora PostgreSQL DB cluster

For Aurora PostgreSQL, Aurora machine learning provides the following Amazon Comprehend function for working with your text data. This function is available only after you install the `aws_ml` extension and complete all setup procedures. For more information, see Setting up your Aurora PostgreSQL DB cluster to use Aurora machine learning.

aws_comprehend.detect_sentiment

This function takes text as input and evaluates whether the text has a a positive, negative, neutral, or mixed emotional posture. It outputs this sentiment along with a confidence level for its evaluation. A summary of the function's documentation is as follows.

```
aws_comprehend.detect_sentiment(
   IN input_text varchar,
   IN language_code varchar,
   IN max_rows_per_batch int,
   OUT sentiment varchar,
   OUT confidence real)
```

The inputs and outputs of this function are as follows.

- `input_text` – The text to evaluate and to assign sentiment (negative, positive, neutral, mixed).
- `language_code` – The language of the `input_text` identified using the 2-letter ISO 639-1 identifier with regional subtag (as needed) or the ISO 639-2 three-letter code, as appropriate. For example, `en` is the code for English, `zh` is the code for simplified Chinese. For more information, see Supported languages in the *Amazon Comprehend Developer Guide*.
- `max_rows_per_batch` – The maximum number of rows per batch for batch-mode processing. For more information, see Understanding batch mode and Aurora machine learning functions.
- `sentiment` – The sentiment of the input text, identified as POSITIVE, NEGATIVE, NEUTRAL, or MIXED.
- `confidence` – The degree of confidence in the accuracy of the specified `sentiment`. Values range from 0.0 to 1.0.

In the following, you can find examples of how to use this function.

Example: A simple query using Amazon Comprehend functions

Here's an example of a simple query that invokes this function to assess customer satisfaction with your support team. Suppose you have a database table (`support`) that stores customer feedback after each request for help. This example query applies the `aws_comprehend.detect_sentiment` function to the text in the `feedback` column of the table and outputs the sentiment and the confidence level for that sentiment. This query also outputs results in descending order.

```
SELECT feedback, s.sentiment,s.confidence
    FROM support,aws_comprehend.detect_sentiment(feedback, 'en') s
    ORDER BY s.confidence DESC;
 feedback                          | sentiment | confidence
 ------------------------------------------------------------+-----------+------------
 Thank you for the excellent customer support!              | POSITIVE  |   0.999771
 The latest version of this product stinks!                 | NEGATIVE  |   0.999184
 Your support team is just awesome! I am blown away.        | POSITIVE  |   0.997774
 Your product is too complex, but your support is great.    | MIXED     |   0.957958
 Your support tech helped me in fifteen minutes.            | POSITIVE  |   0.949491
 My problem was never resolved!                             | NEGATIVE  |   0.920644
 When will the new version of this product be released?     | NEUTRAL   |   0.902706
 I cannot stand that chatbot.                               | NEGATIVE  |   0.895219
 Your support tech talked down to me.                       | NEGATIVE  |   0.868598
 It took me way too long to get a real person.              | NEGATIVE  |   0.481805

 (10 rows)
```

To avoid being charged for sentiment detection more than once per table row, you can materialize the results. Do this on the rows of interest. For example, the clinician's notes are being updated so that only those in French (`fr`) use the sentiment detection function.

```
UPDATE clinician_notes
SET sentiment = (aws_comprehend.detect_sentiment (french_notes, 'fr')).sentiment,
    confidence = (aws_comprehend.detect_sentiment (french_notes, 'fr')).confidence
WHERE
    clinician_notes.french_notes IS NOT NULL AND
    LENGTH(TRIM(clinician_notes.french_notes)) > 0 AND
    clinician_notes.sentiment IS NULL;
```

For more information on optimizing your function calls, see Performance considerations for using Aurora machine learning with Aurora PostgreSQL.

Using SageMaker AI with your Aurora PostgreSQL DB cluster

After setting up your SageMaker AI environment and integrating with Aurora PostgreSQL as outlined in Setting up Aurora PostgreSQL to use Amazon SageMaker AI, you can invoke operations by using the `aws_sagemaker.invoke_endpoint` function. The `aws_sagemaker.invoke_endpoint` function connects only to a model endpoint in the same Amazon Web Services Region. If your database instance has replicas in multiple Amazon Web

Services Regions be sure that you setup and deploy each SageMaker AI model to every Amazon Web Services Region.

Calls to `aws_sagemaker.invoke_endpoint` are authenticated using the IAM role that you set up to associated your Aurora PostgreSQL DB cluster with the SageMaker AI service and the endpoint that you provided during the setup process. SageMaker AI model endpoints are scoped to an individual account and are not public. The `endpoint_name` URL doesn't contain the account ID. SageMaker AI determines the account ID from the authentication token that is supplied by the SageMaker AI IAM role of the database instance.

aws_sagemaker.invoke_endpoint

This function takes the SageMaker AI endpoint as input and the number of rows that should be processed as a batch. It also takes as input the various parameters expected by the SageMaker AI model endpoint. This function's reference documentation is as follows.

```
aws_sagemaker.invoke_endpoint(
  IN endpoint_name varchar,
  IN max_rows_per_batch int,
  VARIADIC model_input "any",
  OUT model_output varchar
  )
```

The inputs and outputs of this function are as follows.

- `endpoint_name` – An endpoint URL that is Amazon Web Services Region–independent.
- `max_rows_per_batch` – The maximum number of rows per batch for batch-mode processing. For more information, see Understanding batch mode and Aurora machine learning functions.
- `model_input` – One or more input parameters for the model. These can be any data type needed by the SageMaker AI model. PostgreSQL allows you to specify up to 100 input parameters for a function. Array data types must be one-dimensional, but can contain as many elements as are expected by the SageMaker AI model. The number of inputs to a SageMaker AI model is limited only by the SageMaker AI 6 MB message size limit.
- `model_output` – The SageMaker AI model's output as text.

Creating a user-defined function to invoke a SageMaker AI model

Create a separate user-defined function to call `aws_sagemaker.invoke_endpoint` for each of your SageMaker AI models. Your user-defined function represents the SageMaker AI endpoint hosting the model. The `aws_sagemaker.invoke_endpoint` function runs within the user-defined function. User-defined functions provide many advantages:

- You can give your SageMaker AI model its own name instead of only calling `aws_sagemaker.invoke_endpoint` for all of your SageMaker AI models.
- You can specify the model endpoint URL in just one place in your SQL application code.
- You can control `EXECUTE` privileges to each Aurora machine learning function independently.
- You can declare the model input and output types using SQL types. SQL enforces the number and type of arguments passed to your SageMaker AI model and performs type conversion if necessary. Using SQL types will also translate SQL `NULL` to the appropriate default value expected by your SageMaker AI model.
- You can reduce the maximum batch size if you want to return the first few rows a little faster.

To specify a user-defined function, use the SQL data definition language (DDL) statement `CREATE FUNCTION`. When you define the function, you specify the following:

- The input parameters to the model.
- The specific SageMaker AI endpoint to invoke.
- The return type.

The user-defined function returns the inference computed by the SageMaker AI endpoint after running the model on the input parameters. The following example creates a user-defined function for an SageMaker AI model with two input parameters.

```
CREATE FUNCTION classify_event (IN arg1 INT, IN arg2 DATE, OUT category INT)
AS $$
    SELECT aws_sagemaker.invoke_endpoint (
        'sagemaker_model_endpoint_name', NULL,
        arg1, arg2                        -- model inputs are separate arguments
        )::INT                            -- cast the output to INT
$$ LANGUAGE SQL PARALLEL SAFE COST 5000;
```

Note the following:

- The `aws_sagemaker.invoke_endpoint` function input can be one or more parameters of any data type.
- This example uses an INT output type. If you cast the output from a `varchar` type to a different type, then it must be cast to a PostgreSQL builtin scalar type such as `INTEGER`, `REAL`, `FLOAT`, or `NUMERIC`. For more information about these types, see Data types in the PostgreSQL documentation.
- Specify `PARALLEL SAFE` to enable parallel query processing. For more information, see Improving response times with parallel query processing.
- Specify `COST 5000` to estimate the cost of running the function. Use a positive number giving the estimated run cost for the function, in units of `cpu_operator_cost`.

Passing an array as input to a SageMaker AI model

The `aws_sagemaker.invoke_endpoint` function can have up to 100 input parameters, which is the limit for PostgreSQL functions. If the SageMaker AI model requires more than 100 parameters of the same type, pass the model parameters as an array.

The following example defines a function that passes an array as input to the SageMaker AI regression model. The output is cast to a `REAL` value.

```
CREATE FUNCTION regression_model (params REAL[], OUT estimate REAL)
AS $$
    SELECT aws_sagemaker.invoke_endpoint (
      'sagemaker_model_endpoint_name',
      NULL,
      params
      )::REAL
$$ LANGUAGE SQL PARALLEL SAFE COST 5000;
```

Specifying batch size when invoking a SageMaker AI model

The following example creates a user-defined function for a SageMaker AI model that sets the batch size default to NULL. The function also allows you to provide a different batch size when you invoke it.

```
CREATE FUNCTION classify_event (
    IN event_type INT, IN event_day DATE, IN amount REAL, -- model inputs
    max_rows_per_batch INT DEFAULT NULL,  -- optional batch size limit
    OUT category INT)                     -- model output
```

```
AS $$
    SELECT aws_sagemaker.invoke_endpoint (
        'sagemaker_model_endpoint_name', max_rows_per_batch,
        event_type, event_day, COALESCE(amount, 0.0)
        )::INT              -- casts output to type INT
$$ LANGUAGE SQL PARALLEL SAFE COST 5000;
```

Note the following:

- Use the optional `max_rows_per_batch` parameter to provide control of the number of rows for a batch-mode function invocation. If you use a value of NULL, then the query optimizer automatically chooses the maximum batch size. For more information, see Understanding batch mode and Aurora machine learning functions.
- By default, passing NULL as a parameter's value is translated to an empty string before passing to SageMaker AI. For this example the inputs have different types.
- If you have a non-text input, or text input that needs to default to some value other than an empty string, use the `COALESCE` statement. Use `COALESCE` to translate NULL to the desired null replacement value in the call to `aws_sagemaker.invoke_endpoint`. For the `amount` parameter in this example, a NULL value is converted to 0.0.

Invoking a SageMaker AI model that has multiple outputs

The following example creates a user-defined function for a SageMaker AI model that returns multiple outputs. Your function needs to cast the output of the `aws_sagemaker.invoke_endpoint` function to a corresponding data type. For example, you could use the built-in PostgreSQL point type for (x,y) pairs or a user-defined composite type.

This user-defined function returns values from a model that returns multiple outputs by using a composite type for the outputs.

```
CREATE TYPE company_forecasts AS (
    six_month_estimated_return real,
    one_year_bankruptcy_probability float);
CREATE FUNCTION analyze_company (
    IN free_cash_flow NUMERIC(18, 6),
    IN debt NUMERIC(18,6),
    IN max_rows_per_batch INT DEFAULT NULL,
    OUT prediction company_forecasts)
AS $$
```

```
    SELECT (aws_sagemaker.invoke_endpoint('endpt_name',
       max_rows_per_batch,free_cash_flow, debt))::company_forecasts;


$$ LANGUAGE SQL PARALLEL SAFE COST 5000;
```

For the composite type, use fields in the same order as they appear in the model output and cast the output of `aws_sagemaker.invoke_endpoint` to your composite type. The caller can extract the individual fields either by name or with PostgreSQL ".*" notation.

Exporting data to Amazon S3 for SageMaker AI model training (Advanced)

We recommend that you become familiar with Aurora machine learning and SageMaker AI by using the provided algorithms and examples rather than trying to train your own models. For more information, see Get Started with Amazon SageMaker AI

To train SageMaker AI models, you export data to an Amazon S3 bucket. The Amazon S3 bucket is used by SageMaker AI to train your model before it is deployed. You can query data from an Aurora PostgreSQL DB cluster and save it directly into text files stored in an Amazon S3 bucket. Then SageMaker AI consumes the data from the Amazon S3 bucket for training. For more about SageMaker AI model training, see Train a model with Amazon SageMaker AI.

> **Note**
>
> When you create an Amazon S3 bucket for SageMaker AI model training or batch scoring, use `sagemaker` in the Amazon S3 bucket name. For more information, see Specify a Amazon S3 Bucket to Upload Training Datasets and Store Output Data in the *Amazon SageMaker AI Developer Guide*.

For more information about exporting your data, see Exporting data from an Aurora PostgreSQL DB cluster to Amazon S3.

Performance considerations for using Aurora machine learning with Aurora PostgreSQL

The Amazon Comprehend and SageMaker AI services do most of the work when invoked by an Aurora machine learning function. That means that you can scale those resources as needed,

independently. For your Aurora PostgreSQL DB cluster, you can make your function calls as efficient as possible. Following, you can find some performance considerations to note when working with Aurora machine learning from Aurora PostgreSQL.

Topics

- Understanding batch mode and Aurora machine learning functions
- Improving response times with parallel query processing
- Using materialized views and materialized columns

Understanding batch mode and Aurora machine learning functions

Typically, PostgreSQL runs functions one row at a time. Aurora machine learning can reduce this overhead by combining the calls to the external Aurora machine learning service for many rows into batches with an approach called *batch-mode execution*. In batch mode, Aurora machine learning receives the responses for a batch of input rows, and then delivers the responses back to the running query one row at a time. This optimization improves the throughput of your Aurora queries without limiting the PostgreSQL query optimizer.

Aurora automatically uses batch mode if the function is referenced from the `SELECT` list, a `WHERE` clause, or a `HAVING` clause. Note that top-level simple `CASE` expressions are eligible for batch-mode execution. Top-level searched `CASE` expressions are also eligible for batch-mode execution provided that the first `WHEN` clause is a simple predicate with a batch-mode function call.

Your user-defined function must be a `LANGUAGE SQL` function and should specify `PARALLEL SAFE` and `COST 5000`.

Function migration from the SELECT statement to the FROM clause

Usually, an `aws_ml` function that is eligible for batch-mode execution is automatically migrated by Aurora to the `FROM` clause.

The migration of eligible batch-mode functions to the FROM clause can be examined manually on a per-query level. To do this, you use EXPLAIN statements (and ANALYZE and VERBOSE) and find the "Batch Processing" information below each batch-mode `Function Scan`. You can also use EXPLAIN (with VERBOSE) without running the query. You then observe whether the calls to the function appear as a `Function Scan` under a nested loop join that was not specified in the original statement.

In the following example, the nested loop join operator in the plan shows that Aurora migrated the anomaly_score function. It migrated this function from the SELECT list to the FROM clause, where it's eligible for batch-mode execution.

```
EXPLAIN (VERBOSE, COSTS false)
SELECT anomaly_score(ts.R.description) from ts.R;
                         QUERY PLAN
-------------------------------------------------------------
 Nested Loop
   Output: anomaly_score((r.description)::text)
   ->  Seq Scan on ts.r
         Output: r.id, r.description, r.score
   ->  Function Scan on public.anomaly_score
         Output: anomaly_score.anomaly_score
         Function Call: anomaly_score((r.description)::text)
```

To disable batch-mode execution, set the apg_enable_function_migration parameter to false. This prevents the migration of aws_ml functions from the SELECT to the FROM clause. The following shows how.

```
SET apg_enable_function_migration = false;
```

The apg_enable_function_migration parameter is a Grand Unified Configuration (GUC) parameter that is recognized by the Aurora PostgreSQL apg_plan_mgmt extension for query plan management. To disable function migration in a session, use query plan management to save the resulting plan as an approved plan. At runtime, query plan management enforces the approved plan with its apg_enable_function_migration setting. This enforcement occurs regardless of the apg_enable_function_migration GUC parameter setting. For more information, see Managing query execution plans for Aurora PostgreSQL.

Using the max_rows_per_batch parameter

Both the aws_comprehend.detect_sentiment and the aws_sagemaker.invoke_endpoint functions have a max_rows_per_batch parameter. This parameter specifies the number of rows that can be sent to the Aurora machine learning service. The larger the dataset processed by your function, the larger you can make the batch size.

Batch-mode functions improve efficiency by building batches of rows that spread the cost of the Aurora machine learning function calls over a large number of rows. However, if a SELECT

statement finishes early due to a LIMIT clause, then the batch can be constructed over more rows than the query uses. This approach can result in additional charges to your Amazon account. To gain the benefits of batch-mode execution but avoid building batches that are too large, use a smaller value for the max_rows_per_batch parameter in your function calls.

If you do an EXPLAIN (VERBOSE, ANALYZE) of a query that uses batch-mode execution, you see a FunctionScan operator that is below a nested loop join. The number of loops reported by EXPLAIN equals the number of times a row was fetched from the FunctionScan operator. If a statement uses a LIMIT clause, the number of fetches is consistent. To optimize the size of the batch, set the max_rows_per_batch parameter to this value. However, if the batch-mode function is referenced in a predicate in the WHERE clause or HAVING clause, then you probably can't know the number of fetches in advance. In this case, use the loops as a guideline and experiment with max_rows_per_batch to find a setting that optimizes performance.

Verifying batch-mode execution

To see if a function ran in batch mode, use EXPLAIN ANALYZE. If batch-mode execution was used, then the query plan will include the information in a "Batch Processing" section.

```
EXPLAIN ANALYZE SELECT user-defined-function();
 Batch Processing: num batches=1 avg/min/max batch size=3333.000/3333.000/3333.000
                                 avg/min/max batch call time=146.273/146.273/146.273
```

In this example, there was 1 batch that contained 3,333 rows, which took 146.273 ms to process. The "Batch Processing" section shows the following:

- How many batches there were for this function scan operation
- The batch size average, minimum, and maximum
- The batch execution time average, minimum, and maximum

Typically the final batch is smaller than the rest, which often results in a minimum batch size that is much smaller than the average.

To return the first few rows more quickly, set the max_rows_per_batch parameter to a smaller value.

To reduce the number of batch mode calls to the ML service when you use a LIMIT in your user-defined function, set the max_rows_per_batch parameter to a smaller value.

Improving response times with parallel query processing

To get results as fast as possible from a large number of rows, you can combine parallel query processing with batch mode processing. You can use parallel query processing for `SELECT`, `CREATE TABLE AS SELECT`, and `CREATE MATERIALIZED VIEW` statements.

> **Note**
>
> PostgreSQL doesn't yet support parallel query for data manipulation language (DML) statements.

Parallel query processing occurs both within the database and within the ML service. The number of cores in the instance class of the database limits the degree of parallelism that can be used when running a query. The database server can construct a parallel query execution plan that partitions the task among a set of parallel workers. Then each of these workers can build batched requests containing tens of thousands of rows (or as many as are allowed by each service).

The batched requests from all of the parallel workers are sent to the SageMaker AI endpoint. The degree of parallelism that the endpoint can support is constrained by the number and type of instances that support it. For *K* degrees of parallelism, you need a database instance class that has at least *K* cores. You also need to configure the SageMaker AI endpoint for your model to have *K* initial instances of a sufficiently high-performing instance class.

To use parallel query processing, you can set the `parallel_workers` storage parameter of the table that contains the data that you plan to pass. You set `parallel_workers` to a batch-mode function such as `aws_comprehend.detect_sentiment`. If the optimizer chooses a parallel query plan, the Amazon ML services can be called both in batch and in parallel.

You can use the following parameters with the `aws_comprehend.detect_sentiment` function to get a plan with four-way parallelism. If you change either of the following two parameters, you must restart the database instance for the changes to take effect

```
-- SET max_worker_processes to 8;  -- default value is 8
-- SET max_parallel_workers to 8;  -- not greater than max_worker_processes
SET max_parallel_workers_per_gather to 4;  -- not greater than max_parallel_workers

-- You can set the parallel_workers storage parameter on the table that the data
```

```
-- for the Aurora machine learning function is coming from in order to manually
 override the degree of
-- parallelism that would otherwise be chosen by the query optimizer
--
ALTER TABLE yourTable SET (parallel_workers = 4);

-- Example query to exploit both batch-mode execution and parallel query
EXPLAIN (verbose, analyze, buffers, hashes)
SELECT aws_comprehend.detect_sentiment(description, 'en')).*
FROM yourTable
WHERE id < 100;
```

For more information about controlling parallel query, see Parallel plans in the PostgreSQL documentation.

Using materialized views and materialized columns

When you invoke an Amazon service such as SageMaker AI or Amazon Comprehend from your database, your account is charged according to the pricing policy of that service. To minimize charges to your account, you can materialize the result of calling the Amazon service into a materialized column so that the Amazon service is not called more than once per input row. If desired, you can add a `materializedAt` timestamp column to record the time at which the columns were materialized.

The latency of an ordinary single-row `INSERT` statement is typically much less than the latency of calling a batch-mode function. Thus, you might not be able to meet the latency requirements of your application if you invoke the batch-mode function for every single-row `INSERT` that your application performs. To materialize the result of calling an Amazon service into a materialized column, high-performance applications generally need to populate the materialized columns. To do this, they periodically issue an `UPDATE` statement that operates on a large batch of rows at the same time.

`UPDATE` takes a row-level lock that can impact a running application. So you might need to use `SELECT ... FOR UPDATE SKIP LOCKED`, or use `MATERIALIZED VIEW`.

Analytic queries that operate on a large number of rows in real time can combine batch-mode materialization with real-time processing. To do this, these queries assemble a `UNION ALL` of the pre-materialized results with a query over the rows that don't yet have materialized results. In some cases, such a `UNION ALL` is needed in multiple places, or the query is generated by a third-

party application. If so, you can create a `VIEW` to encapsulate the `UNION ALL` operation so this detail isn't exposed to the rest of the SQL application.

You can use a materialized view to materialize the results of an arbitrary `SELECT` statement at a snapshot in time. You can also use it to refresh the materialized view at any time in the future. Currently PostgreSQL doesn't support incremental refresh, so each time the materialized view is refreshed the materialized view is fully recomputed.

You can refresh materialized views with the `CONCURRENTLY` option, which updates the contents of the materialized view without taking an exclusive lock. Doing this allows a SQL application to read from the materialized view while it's being refreshed.

Monitoring Aurora machine learning

You can monitor the `aws_ml` functions by setting the `track_functions` parameter in your custom DB cluster parameter group to `all`. By default, this parameter is set to `pl` which means that only procedure-language functions are tracked. By changing this to `all`, the `aws_ml` functions are also tracked. For more information, see Run-time Statistics in the PostgreSQL documentation.

For information about monitoring the performance of the SageMaker AI operations called from Aurora machine learning functions, see Monitor Amazon SageMaker AI in the *Amazon SageMaker AI Developer Guide*.

With `track_functions` set to `all`, you can query the `pg_stat_user_functions` view to get statistics about the functions that you define and use to invoke Aurora machine learning services. For each function, the view provides the number of `calls`, `total_time`, and `self_time`.

To view the statistics for the `aws_sagemaker.invoke_endpoint` and the `aws_comprehend.detect_sentiment` functions, you can filter results by schema name using the following query.

```
SELECT * FROM pg_stat_user_functions
    WHERE schemaname
    LIKE 'aws_%';
```

To clear the statistics, do as follows.

```
SELECT pg_stat_reset();
```

You can get the names of your SQL functions that call the `aws_sagemaker.invoke_endpoint` function by querying the PostgreSQL `pg_proc` system catalog. This catalog stores information about functions, procedures, and more. For more information, see pg_proc in the PostgreSQL documentation. Following is an example of querying the table to get the names of functions (`proname`) whose source (`prosrc`) includes the text *invoke_endpoint*.

```
SELECT proname FROM pg_proc WHERE prosrc LIKE '%invoke_endpoint%';
```

Code examples for Aurora using Amazon SDKs

The following code examples show how to use Aurora with an Amazon software development kit (SDK).

Basics are code examples that show you how to perform the essential operations within a service.

Actions are code excerpts from larger programs and must be run in context. While actions show you how to call individual service functions, you can see actions in context in their related scenarios.

Scenarios are code examples that show you how to accomplish specific tasks by calling multiple functions within a service or combined with other Amazon Web Services services.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Code examples

- Basic examples for Aurora using Amazon SDKs
  - Hello Aurora
  - Learn the basics of Aurora with an Amazon SDK
  - Actions for Aurora using Amazon SDKs
    - Use CreateDBCluster with an Amazon SDK
    - Use CreateDBClusterParameterGroup with an Amazon SDK
    - Use CreateDBClusterSnapshot with an Amazon SDK
    - Use CreateDBInstance with an Amazon SDK
    - Use DeleteDBCluster with an Amazon SDK
    - Use DeleteDBClusterParameterGroup with an Amazon SDK
    - Use DeleteDBInstance with an Amazon SDK
    - Use DescribeDBClusterParameterGroups with an Amazon SDK
    - Use DescribeDBClusterParameters with an Amazon SDK
    - Use DescribeDBClusterSnapshots with an Amazon SDK
    - Use DescribeDBClusters with an Amazon SDK
    - Use DescribeDBEngineVersions with an Amazon SDK

    - Use DescribeDBInstances with an Amazon SDK
    - Use DescribeOrderableDBInstanceOptions with an Amazon SDK or CLI
    - Use ModifyDBClusterParameterGroup with an Amazon SDK
- Scenarios for Aurora using Amazon SDKs
    - Create a lending library REST API
    - Create an Aurora Serverless work item tracker

Basic examples for Aurora using Amazon SDKs

The following code examples show how to use the basics of Amazon Aurora with Amazon SDKs.

Examples

- Hello Aurora
- Learn the basics of Aurora with an Amazon SDK
- Actions for Aurora using Amazon SDKs
    - Use CreateDBCluster with an Amazon SDK
    - Use CreateDBClusterParameterGroup with an Amazon SDK
    - Use CreateDBClusterSnapshot with an Amazon SDK
    - Use CreateDBInstance with an Amazon SDK
    - Use DeleteDBCluster with an Amazon SDK
    - Use DeleteDBClusterParameterGroup with an Amazon SDK
    - Use DeleteDBInstance with an Amazon SDK
    - Use DescribeDBClusterParameterGroups with an Amazon SDK
    - Use DescribeDBClusterParameters with an Amazon SDK
    - Use DescribeDBClusterSnapshots with an Amazon SDK
    - Use DescribeDBClusters with an Amazon SDK
    - Use DescribeDBEngineVersions with an Amazon SDK
    - Use DescribeDBInstances with an Amazon SDK
    - Use DescribeOrderableDBInstanceOptions with an Amazon SDK or CLI
    - Use ModifyDBClusterParameterGroup with an Amazon SDK

Hello Aurora

The following code examples show how to get started using Aurora.

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
using Amazon.RDS;
using Amazon.RDS.Model;
using Microsoft.Extensions.DependencyInjection;
using Microsoft.Extensions.Hosting;

namespace AuroraActions;

public static class HelloAurora
{
    static async Task Main(string[] args)
    {
        // Use the AWS .NET Core Setup package to set up dependency injection for
 the
        // Amazon Relational Database Service (Amazon RDS).
        // Use your AWS profile name, or leave it blank to use the default
 profile.
        using var host = Host.CreateDefaultBuilder(args)
            .ConfigureServices((_, services) =>
                services.AddAWSService<IAmazonRDS>()
            ).Build();

        // Now the client is available for injection. Fetching it directly here
 for example purposes only.
        var rdsClient = host.Services.GetRequiredService<IAmazonRDS>();

        // You can use await and any of the async methods to get a response.
```

```
        var response = await rdsClient.DescribeDBClustersAsync(new
 DescribeDBClustersRequest { IncludeShared = true });
        Console.WriteLine($"Hello Amazon RDS Aurora! Let's list some clusters in
 this account:");
        if (response.DBClusters == null)
        {
            Console.WriteLine($"\tNo clusters found.");
        }
        else
        {
            foreach (var cluster in response.DBClusters)
            {
                Console.WriteLine(
                    $"\tCluster: database: {cluster.DatabaseName} identifier:
 {cluster.DBClusterIdentifier}.");
            }
        }
    }
}
```

- For API details, see DescribeDBClusters in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

Code for the CMakeLists.txt CMake file.

```
# Set the minimum required version of CMake for this project.
cmake_minimum_required(VERSION 3.13)

# Set the AWS service components used by this project.
set(SERVICE_COMPONENTS rds)

# Set this project's name.
```

```
project("hello_aurora")

# Set the C++ standard to use to build this target.
# At least C++ 11 is required for the AWS SDK for C++.
set(CMAKE_CXX_STANDARD 11)

# Use the MSVC variable to determine if this is a Windows build.
set(WINDOWS_BUILD ${MSVC})

if (WINDOWS_BUILD) # Set the location where CMake can find the installed
 libraries for the AWS SDK.
    string(REPLACE ";" "/aws-cpp-sdk-all;" SYSTEM_MODULE_PATH
 "${CMAKE_SYSTEM_PREFIX_PATH}/aws-cpp-sdk-all")
    list(APPEND CMAKE_PREFIX_PATH ${SYSTEM_MODULE_PATH})
endif ()

# Find the AWS SDK for C++ package.
find_package(AWSSDK REQUIRED COMPONENTS ${SERVICE_COMPONENTS})

if (WINDOWS_BUILD AND AWSSDK_INSTALL_AS_SHARED_LIBS)
     # Copy relevant AWS SDK for C++ libraries into the current binary directory
 for running and debugging.

     # set(BIN_SUB_DIR "/Debug") # If you are building from the command line, you
 may need to uncomment this
                                     # and set the proper subdirectory to the
 executables' location.

     AWSSDK_CPY_DYN_LIBS(SERVICE_COMPONENTS ""
 ${CMAKE_CURRENT_BINARY_DIR}${BIN_SUB_DIR})
endif ()

add_executable(${PROJECT_NAME}
        hello_aurora.cpp)

target_link_libraries(${PROJECT_NAME}
        ${AWSSDK_LINK_LIBRARIES})
```

Code for the hello_aurora.cpp source file.

```
#include <aws/core/Aws.h>
#include <aws/rds/RDSClient.h>
```

```
#include <aws/rds/model/DescribeDBClustersRequest.h>
#include <iostream>

/*
 *  A "Hello Aurora" starter application which initializes an Amazon Relational
 Database Service (Amazon RDS) client
 *  and describes the Amazon Aurora (Aurora) clusters.
 *
 *  main function
 *
 *  Usage: 'hello_aurora'
 *
 */
int main(int argc, char **argv) {
    Aws::SDKOptions options;
    // Optionally change the log level for debugging.
//   options.loggingOptions.logLevel = Utils::Logging::LogLevel::Debug;
    Aws::InitAPI(options); // Should only be called once.
    int result = 0;
    {
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

        Aws::RDS::RDSClient rdsClient(clientConfig);

        Aws::String marker; // Used for pagination.
        std::vector<Aws::String> clusterIds;
        do {
            Aws::RDS::Model::DescribeDBClustersRequest request;

            Aws::RDS::Model::DescribeDBClustersOutcome outcome =
                    rdsClient.DescribeDBClusters(request);

            if (outcome.IsSuccess()) {
                for (auto &cluster: outcome.GetResult().GetDBClusters()) {
                    clusterIds.push_back(cluster.GetDBClusterIdentifier());
                }
                marker = outcome.GetResult().GetMarker();
            } else {
                result = 1;
                std::cerr << "Error with Aurora::GDescribeDBClusters. "
                          << outcome.GetError().GetMessage()
                          << std::endl;
```

```
                break;
            }
        } while (!marker.empty());

        std::cout << clusterIds.size() << " Aurora clusters found." << std::endl;
        for (auto &clusterId: clusterIds) {
            std::cout << "  clusterId " << clusterId << std::endl;
        }
    }

    Aws::ShutdownAPI(options); // Should only be called once.
    return 0;
}
```

- For API details, see DescribeDBClusters in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/rds"
)

// main uses the AWS SDK for Go V2 to create an Amazon Aurora client and list up
 to 20
// DB clusters in your account.
```

```
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 auroraClient := rds.NewFromConfig(sdkConfig)
 const maxClusters = 20
 fmt.Printf("Let's list up to %v DB clusters.\n", maxClusters)
 output, err := auroraClient.DescribeDBClusters(
  ctx, &rds.DescribeDBClustersInput{MaxRecords: aws.Int32(maxClusters)})
 if err != nil {
  fmt.Printf("Couldn't list DB clusters: %v\n", err)
  return
 }
 if len(output.DBClusters) == 0 {
  fmt.Println("No DB clusters found.")
 } else {
  for _, cluster := range output.DBClusters {
   fmt.Printf("DB cluster %v has database %v.\n", *cluster.DBClusterIdentifier,
    *cluster.DatabaseName)
  }
 }
}
```

- For API details, see DescribeDBClusters in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.paginators.DescribeDBClustersIterable;

public class DescribeDbClusters {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        describeClusters(rdsClient);
        rdsClient.close();
    }

    public static void describeClusters(RdsClient rdsClient) {
        DescribeDBClustersIterable clustersIterable =
 rdsClient.describeDBClustersPaginator();
        clustersIterable.stream()
                .flatMap(r -> r.dbClusters().stream())
                .forEach(cluster -> System.out
                        .println("Database name: " + cluster.databaseName() + "
 Arn = " + cluster.dbClusterArn()));
    }
}
```

- For API details, see DescribeDBClusters in *Amazon SDK for Java 2.x API Reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import boto3
```

```
# Create an RDS client
rds = boto3.client("rds")

# Create a paginator for the describe_db_clusters operation
paginator = rds.get_paginator("describe_db_clusters")

# Use the paginator to get a list of DB clusters
response_iterator = paginator.paginate(
    PaginationConfig={
        "PageSize": 50,  # Adjust PageSize as needed
        "StartingToken": None,
    }
)

# Iterate through the pages of the response
clusters_found = False
for page in response_iterator:
    if "DBClusters" in page and page["DBClusters"]:
        clusters_found = True
        print("Here are your RDS Aurora clusters:")
        for cluster in page["DBClusters"]:
            print(
                f"Cluster ID: {cluster['DBClusterIdentifier']}, Engine:
 {cluster['Engine']}"
            )

if not clusters_found:
    print("No clusters found!")
```

- For API details, see DescribeDBClusters in *Amazon SDK for Python (Boto3) API Reference*.

Ruby

SDK for Ruby

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
require 'aws-sdk-rds'

# Creates an Amazon RDS client for the AWS Region
rds = Aws::RDS::Client.new

puts 'Listing clusters in this AWS account...'

# Calls the describe_db_clusters method to get information about clusters
resp = rds.describe_db_clusters(max_records: 20)

# Checks if any clusters are found and prints the appropriate message
if resp.db_clusters.empty?
  puts 'No clusters found!'
else
  # Loops through the array of cluster objects and prints the cluster identifier
  resp.db_clusters.each do |cluster|
    puts "Cluster identifier: #{cluster.db_cluster_identifier}"
  end
end
```

- For API details, see DescribeDBClusters in *Amazon SDK for Ruby API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
use aws_sdk_rds::Client;

#[derive(Debug)]
struct Error(String);
impl std::fmt::Display for Error {
    fn fmt(&self, f: &mut std::fmt::Formatter<'_>) -> std::fmt::Result {
        write!(f, "{}", self.0)
```

```
    }
}
impl std::error::Error for Error {}

#[tokio::main]
async fn main() -> Result<(), Error> {
    tracing_subscriber::fmt::init();
    let sdk_config = aws_config::from_env().load().await;
    let client = Client::new(&sdk_config);

    let describe_db_clusters_output = client
        .describe_db_clusters()
        .send()
        .await
        .map_err(|e| Error(e.to_string()))?;
    println!(
        "Found {} clusters:",
        describe_db_clusters_output.db_clusters().len()
    );
    for cluster in describe_db_clusters_output.db_clusters() {
        let name = cluster.database_name().unwrap_or("Unknown");
        let engine = cluster.engine().unwrap_or("Unknown");
        let id = cluster.db_cluster_identifier().unwrap_or("Unknown");
        let class = cluster.db_cluster_instance_class().unwrap_or("Unknown");
        println!("\tDatabase: {name}",);
        println!("\t  Engine: {engine}",);
        println!("\t      ID: {id}",);
        println!("\tInstance: {class}",);
    }

    Ok(())
}
```

- For API details, see DescribeDBClusters in *Amazon SDK for Rust API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Learn the basics of Aurora with an Amazon SDK

The following code examples show how to:

- Create a custom Aurora DB cluster parameter group and set parameter values.
- Create a DB cluster that uses the parameter group.
- Create a DB instance that contains a database.
- Take a snapshot of the DB cluster, then clean up resources.

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

Run an interactive scenario at a command prompt.

```
using Amazon.RDS;
using Amazon.RDS.Model;
using AuroraActions;
using Microsoft.Extensions.DependencyInjection;
using Microsoft.Extensions.Hosting;
using Microsoft.Extensions.Logging;
using Microsoft.Extensions.Logging.Console;
using Microsoft.Extensions.Logging.Debug;

namespace AuroraScenario;

/// <summary>
/// Scenario for Amazon Aurora examples.
/// </summary>
public class AuroraScenario
{
    /*
```

```
   Before running this .NET code example, set up your development environment,
including your credentials.

   This .NET example performs the following tasks:
   1.  Return a list of the available DB engine families for Aurora MySql using
the DescribeDBEngineVersionsAsync method.
   2.  Select an engine family and create a custom DB cluster parameter group
using the CreateDBClusterParameterGroupAsync method.
   3.  Get the parameter group using the DescribeDBClusterParameterGroupsAsync
method.
   4.  Get some parameters in the group using the
DescribeDBClusterParametersAsync method.
   5.  Parse and display some parameters in the group.
   6.  Modify the auto_increment_offset and auto_increment_increment parameters
       using the ModifyDBClusterParameterGroupAsync method.
   7.  Get and display the updated parameters using the
DescribeDBClusterParametersAsync method with a source of "user".
   8.  Get a list of allowed engine versions using the
DescribeDBEngineVersionsAsync method.
   9.  Create an Aurora DB cluster that contains a MySql database and uses the
parameter group.
       using the CreateDBClusterAsync method.
   10. Wait for the DB cluster to be ready using the DescribeDBClustersAsync
method.
   11. Display and select from a list of instance classes available for the
selected engine and version
       using the paginated DescribeOrderableDBInstanceOptions method.
   12. Create a database instance in the cluster using the CreateDBInstanceAsync
method.
   13. Wait for the DB instance to be ready using the DescribeDBInstances
method.
   14. Display the connection endpoint string for the new DB cluster.
   15. Create a snapshot of the DB cluster using the
CreateDBClusterSnapshotAsync method.
   16. Wait for DB snapshot to be ready using the
DescribeDBClusterSnapshotsAsync method.
   17. Delete the DB instance using the DeleteDBInstanceAsync method.
   18. Delete the DB cluster using the DeleteDBClusterAsync method.
   19. Wait for DB cluster to be deleted using the DescribeDBClustersAsync
methods.
   20. Delete the cluster parameter group using the
DeleteDBClusterParameterGroupAsync.
   */
```

```
   private static readonly string sepBar = new('-', 80);
   private static AuroraWrapper auroraWrapper = null!;
   private static ILogger logger = null!;
   private static readonly string engine = "aurora-mysql";
   static async Task Main(string[] args)
   {
       // Set up dependency injection for the Amazon Relational Database Service
(Amazon RDS).
       using var host = Host.CreateDefaultBuilder(args)
           .ConfigureLogging(logging =>
               logging.AddFilter("System", LogLevel.Debug)
                   .AddFilter<DebugLoggerProvider>("Microsoft",
LogLevel.Information)
                   .AddFilter<ConsoleLoggerProvider>("Microsoft",
LogLevel.Trace))
           .ConfigureServices((_, services) =>
               services.AddAWSService<IAmazonRDS>()
                   .AddTransient<AuroraWrapper>()
           )
           .Build();

       logger = LoggerFactory.Create(builder =>
       {
           builder.AddConsole();
       }).CreateLogger<AuroraScenario>();

       auroraWrapper = host.Services.GetRequiredService<AuroraWrapper>();

       Console.WriteLine(sepBar);
       Console.WriteLine(
           "Welcome to the Amazon Aurora: get started with DB clusters
example.");
       Console.WriteLine(sepBar);

       DBClusterParameterGroup parameterGroup = null!;
       DBCluster? newCluster = null;
       DBInstance? newInstance = null;

       try
       {
           var parameterGroupFamily = await ChooseParameterGroupFamilyAsync();

           parameterGroup = await
CreateDBParameterGroupAsync(parameterGroupFamily);
```

```
            var parameters = await
DescribeParametersInGroupAsync(parameterGroup.DBClusterParameterGroupName,
                new List<string> { "auto_increment_offset",
"auto_increment_increment" });

            await
ModifyParametersAsync(parameterGroup.DBClusterParameterGroupName, parameters);

            await
DescribeUserSourceParameters(parameterGroup.DBClusterParameterGroupName);

            var engineVersionChoice = await
ChooseDBEngineVersionAsync(parameterGroupFamily);

            var newClusterIdentifier = "Example-Cluster-" + DateTime.Now.Ticks;

            newCluster = await CreateNewCluster
            (
                parameterGroup,
                engine,
                engineVersionChoice.EngineVersion,
                newClusterIdentifier
            );

            var instanceClassChoice = await ChooseDBInstanceClass(engine,
engineVersionChoice.EngineVersion);

            var newInstanceIdentifier = "Example-Instance-" + DateTime.Now.Ticks;

            newInstance = await CreateNewInstance(
                newClusterIdentifier,
                engine,
                engineVersionChoice.EngineVersion,
                instanceClassChoice.DBInstanceClass,
                newInstanceIdentifier
            );

            DisplayConnectionString(newCluster!);
            await CreateSnapshot(newCluster!);
            await CleanupResources(newInstance, newCluster, parameterGroup);

            Console.WriteLine("Scenario complete.");
            Console.WriteLine(sepBar);
```

```
        }
        catch (Exception ex)
        {
            await CleanupResources(newInstance, newCluster, parameterGroup);
            logger.LogError(ex, "There was a problem executing the scenario.");
        }
    }

    /// <summary>
    /// Choose the Aurora DB parameter group family from a list of available
options.
    /// </summary>
    /// <returns>The selected parameter group family.</returns>
    public static async Task<string> ChooseParameterGroupFamilyAsync()
    {
        Console.WriteLine(sepBar);
        // 1. Get a list of available engines.
        var engines = await
auroraWrapper.DescribeDBEngineVersionsForEngineAsync(engine);

        Console.WriteLine($"1. The following is a list of available DB parameter
group families for engine {engine}:");

        var parameterGroupFamilies =
            engines.GroupBy(e => e.DBParameterGroupFamily).ToList();
        for (var i = 1; i <= parameterGroupFamilies.Count; i++)
        {
            var parameterGroupFamily = parameterGroupFamilies[i - 1];
            // List the available parameter group families.
            Console.WriteLine(
                $"\t{i}. Family: {parameterGroupFamily.Key}");
        }

        var choiceNumber = 0;
        while (choiceNumber < 1 || choiceNumber > parameterGroupFamilies.Count)
        {
            Console.WriteLine("2. Select an available DB parameter group family
by entering a number from the preceding list:");
            var choice = Console.ReadLine();
            Int32.TryParse(choice, out choiceNumber);
        }
        var parameterGroupFamilyChoice = parameterGroupFamilies[choiceNumber -
1];
        Console.WriteLine(sepBar);
```

```
        return parameterGroupFamilyChoice.Key;
    }

    /// <summary>
    /// Create and get information on a DB parameter group.
    /// </summary>
    /// <param name="dbParameterGroupFamily">The DBParameterGroupFamily for the
 new DB parameter group.</param>
    /// <returns>The new DBParameterGroup.</returns>
    public static async Task<DBClusterParameterGroup>
 CreateDBParameterGroupAsync(string dbParameterGroupFamily)
    {
        Console.WriteLine(sepBar);
        Console.WriteLine($"2. Create new DB parameter group with family
 {dbParameterGroupFamily}:");

        var parameterGroup = await
 auroraWrapper.CreateCustomClusterParameterGroupAsync(
            dbParameterGroupFamily,
            "ExampleParameterGroup-" + DateTime.Now.Ticks,
            "New example parameter group");

        var groupInfo =
            await
 auroraWrapper.DescribeCustomDBClusterParameterGroupAsync(parameterGroup.DBClusterParamet

        Console.WriteLine(
            $"3. New DB parameter group created: \n\t{groupInfo?.Description}, \n
\tARN {groupInfo?.DBClusterParameterGroupName}");
        Console.WriteLine(sepBar);
        return parameterGroup;
    }

    /// <summary>
    /// Get and describe parameters from a DBParameterGroup.
    /// </summary>
    /// <param name="parameterGroupName">The name of the DBParameterGroup.</
param>
    /// <param name="parameterNames">Optional specific names of parameters to
 describe.</param>
    /// <returns>The list of requested parameters.</returns>
    public static async Task<List<Parameter>>
 DescribeParametersInGroupAsync(string parameterGroupName, List<string>?
 parameterNames = null)
```

```
    {
        Console.WriteLine(sepBar);
        Console.WriteLine("4. Get some parameters from the group.");
        Console.WriteLine(sepBar);

        var parameters =
            await
auroraWrapper.DescribeDBClusterParametersInGroupAsync(parameterGroupName);

        var matchingParameters =
            parameters.Where(p => parameterNames == null ||
parameterNames.Contains(p.ParameterName)).ToList();

        Console.WriteLine("5. Parameter information:");
        matchingParameters.ForEach(p =>
            Console.WriteLine(
                $"\n\tParameter: {p.ParameterName}." +
                $"\n\tDescription: {p.Description}." +
                $"\n\tAllowed Values: {p.AllowedValues}." +
                $"\n\tValue: {p.ParameterValue}."));

        Console.WriteLine(sepBar);

        return matchingParameters;
    }

    /// <summary>
    /// Modify a parameter from a DBParameterGroup.
    /// </summary>
    /// <param name="parameterGroupName">Name of the DBParameterGroup.</param>
    /// <param name="parameters">The parameters to modify.</param>
    /// <returns>Async task.</returns>
    public static async Task ModifyParametersAsync(string parameterGroupName,
List<Parameter> parameters)
    {
        Console.WriteLine(sepBar);
        Console.WriteLine("6. Modify some parameters in the group.");

        await
auroraWrapper.ModifyIntegerParametersInGroupAsync(parameterGroupName,
parameters);

        Console.WriteLine(sepBar);
    }
```

```
    /// <summary>
    /// Describe the user source parameters in the group.
    /// </summary>
    /// <param name="parameterGroupName">The name of the DBParameterGroup.</
param>
    /// <returns>Async task.</returns>
    public static async Task DescribeUserSourceParameters(string
 parameterGroupName)
    {
        Console.WriteLine(sepBar);
        Console.WriteLine("7. Describe updated user source parameters in the
 group.");

        var parameters =
            await
 auroraWrapper.DescribeDBClusterParametersInGroupAsync(parameterGroupName,
 "user");

        parameters.ForEach(p =>
            Console.WriteLine(
                $"\n\tParameter: {p.ParameterName}." +
                $"\n\tDescription: {p.Description}." +
                $"\n\tAllowed Values: {p.AllowedValues}." +
                $"\n\tValue: {p.ParameterValue}."));

        Console.WriteLine(sepBar);
    }

    /// <summary>
    /// Choose a DB engine version.
    /// </summary>
    /// <param name="dbParameterGroupFamily">DB parameter group family for engine
 choice.</param>
    /// <returns>The selected engine version.</returns>
    public static async Task<DBEngineVersion> ChooseDBEngineVersionAsync(string
 dbParameterGroupFamily)
    {
        Console.WriteLine(sepBar);
        // Get a list of allowed engines.
        var allowedEngines =
            await auroraWrapper.DescribeDBEngineVersionsForEngineAsync(engine,
 dbParameterGroupFamily);
```

```
        Console.WriteLine($"Available DB engine versions for parameter group
 family {dbParameterGroupFamily}:");
        int i = 1;
        foreach (var version in allowedEngines)
        {
            Console.WriteLine(
                $"\t{i}. {version.DBEngineVersionDescription}.");
            i++;
        }

        var choiceNumber = 0;
        while (choiceNumber < 1 || choiceNumber > allowedEngines.Count)
        {
            Console.WriteLine("8. Select an available DB engine version by
 entering a number from the list above:");
            var choice = Console.ReadLine();
            Int32.TryParse(choice, out choiceNumber);
        }

        var engineChoice = allowedEngines[choiceNumber - 1];
        Console.WriteLine(sepBar);
        return engineChoice;
    }

    /// <summary>
    /// Create a new RDS DB cluster.
    /// </summary>
    /// <param name="parameterGroup">Parameter group to use for the DB cluster.</
param>
    /// <param name="engineName">Engine to use for the DB cluster.</param>
    /// <param name="engineVersion">Engine version to use for the DB cluster.</
param>
    /// <param name="clusterIdentifier">Cluster identifier to use for the DB
 cluster.</param>
    /// <returns>The new DB cluster.</returns>
    public static async Task<DBCluster?> CreateNewCluster(DBClusterParameterGroup
 parameterGroup,
        string engineName, string engineVersion, string clusterIdentifier)
    {
        Console.WriteLine(sepBar);
        Console.WriteLine($"9. Create a new DB cluster with identifier
 {clusterIdentifier}.");

        DBCluster newCluster;
```

```
        var clusters = await auroraWrapper.DescribeDBClustersPagedAsync();
        var isClusterCreated = clusters.Any(i => i.DBClusterIdentifier ==
clusterIdentifier);

        if (isClusterCreated)
        {
            Console.WriteLine("Cluster already created.");
            newCluster = clusters.First(i => i.DBClusterIdentifier ==
clusterIdentifier);
        }
        else
        {
            Console.WriteLine("Enter an admin username:");
            var username = Console.ReadLine();

            Console.WriteLine("Enter an admin password:");
            var password = Console.ReadLine();

            newCluster = await auroraWrapper.CreateDBClusterWithAdminAsync(
                "ExampleDatabase",
                clusterIdentifier,
                parameterGroup.DBClusterParameterGroupName,
                engineName,
                engineVersion,
                username!,
                password!
            );

            Console.WriteLine("10. Waiting for DB cluster to be ready...");
            while (newCluster.Status != "available")
            {
                Console.Write(".");
                Thread.Sleep(5000);
                clusters = await
auroraWrapper.DescribeDBClustersPagedAsync(clusterIdentifier);
                newCluster = clusters.First();
            }
        }

        Console.WriteLine(sepBar);
        return newCluster;
    }

    /// <summary>
```

```
    /// Choose a DB instance class for a particular engine and engine version.
    /// </summary>
    /// <param name="engine">DB engine for DB instance choice.</param>
    /// <param name="engineVersion">DB engine version for DB instance choice.</
param>
    /// <returns>The selected orderable DB instance option.</returns>
    public static async Task<OrderableDBInstanceOption>
 ChooseDBInstanceClass(string engine, string engineVersion)
    {
        Console.WriteLine(sepBar);
        // Get a list of allowed DB instance classes.
        var allowedInstances =
            await
 auroraWrapper.DescribeOrderableDBInstanceOptionsPagedAsync(engine,
 engineVersion);

        Console.WriteLine($"Available DB instance classes for engine {engine} and
 version {engineVersion}:");
        int i = 1;

        foreach (var instance in allowedInstances)
        {
            Console.WriteLine(
                $"\t{i}. Instance class: {instance.DBInstanceClass} (storage type
 {instance.StorageType})");
            i++;
        }

        var choiceNumber = 0;
        while (choiceNumber < 1 || choiceNumber > allowedInstances.Count)
        {
            Console.WriteLine("11. Select an available DB instance class by
 entering a number from the preceding list:");
            var choice = Console.ReadLine();
            Int32.TryParse(choice, out choiceNumber);
        }

        var instanceChoice = allowedInstances[choiceNumber - 1];
        Console.WriteLine(sepBar);
        return instanceChoice;
    }

    /// <summary>
    /// Create a new DB instance.
```

```
    /// </summary>
    /// <param name="engineName">Engine to use for the DB instance.</param>
    /// <param name="engineVersion">Engine version to use for the DB instance.</
param>
    /// <param name="instanceClass">Instance class to use for the DB instance.</
param>
    /// <param name="instanceIdentifier">Instance identifier to use for the DB
 instance.</param>
    /// <returns>The new DB instance.</returns>
    public static async Task<DBInstance?> CreateNewInstance(
        string clusterIdentifier,
        string engineName,
        string engineVersion,
        string instanceClass,
        string instanceIdentifier)
    {
        Console.WriteLine(sepBar);
        Console.WriteLine($"12. Create a new DB instance with identifier
 {instanceIdentifier}.");
        bool isInstanceReady = false;
        DBInstance newInstance;
        var instances = await auroraWrapper.DescribeDBInstancesPagedAsync();
        isInstanceReady = instances.FirstOrDefault(i =>
            i.DBInstanceIdentifier == instanceIdentifier)?.DBInstanceStatus ==
 "available";

        if (isInstanceReady)
        {
            Console.WriteLine("Instance already created.");
            newInstance = instances.First(i => i.DBInstanceIdentifier ==
 instanceIdentifier);
        }
        else
        {
            newInstance = await auroraWrapper.CreateDBInstanceInClusterAsync(
                clusterIdentifier,
                instanceIdentifier,
                engineName,
                engineVersion,
                instanceClass
            );

            Console.WriteLine("13. Waiting for DB instance to be ready...");
            while (!isInstanceReady)
```

```
            {
                Console.Write(".");
                Thread.Sleep(5000);
                instances = await
 auroraWrapper.DescribeDBInstancesPagedAsync(instanceIdentifier);
                isInstanceReady = instances.FirstOrDefault()?.DBInstanceStatus ==
 "available";
                newInstance = instances.First();
            }
        }

        Console.WriteLine(sepBar);
        return newInstance;
    }

    /// <summary>
    /// Display a connection string for an Amazon RDS DB cluster.
    /// </summary>
    /// <param name="cluster">The DB cluster to use to get a connection string.</
param>
    public static void DisplayConnectionString(DBCluster cluster)
    {
        Console.WriteLine(sepBar);
        // Display the connection string.
        Console.WriteLine("14. New DB cluster connection string: ");
        Console.WriteLine(
            $"\n{engine} -h {cluster.Endpoint} -P {cluster.Port} "
            + $"-u {cluster.MasterUsername} -p [YOUR PASSWORD]\n");

        Console.WriteLine(sepBar);
    }

    /// <summary>
    /// Create a snapshot from an Amazon RDS DB cluster.
    /// </summary>
    /// <param name="cluster">DB cluster to use when creating a snapshot.</param>
    /// <returns>The snapshot object.</returns>
    public static async Task<DBClusterSnapshot> CreateSnapshot(DBCluster cluster)
    {
        Console.WriteLine(sepBar);
        // Create a snapshot.
        Console.WriteLine($"15. Creating snapshot from DB cluster
 {cluster.DBClusterIdentifier}.");
```

```
        var snapshot = await
auroraWrapper.CreateClusterSnapshotByIdentifierAsync(
            cluster.DBClusterIdentifier,
            "ExampleSnapshot-" + DateTime.Now.Ticks);

        // Wait for the snapshot to be available.
        bool isSnapshotReady = false;

        Console.WriteLine($"16. Waiting for snapshot to be ready...");
        while (!isSnapshotReady)
        {
            Console.Write(".");
            Thread.Sleep(5000);
            var snapshots =
                await
auroraWrapper.DescribeDBClusterSnapshotsByIdentifierAsync(cluster.DBClusterIdentifier);
            isSnapshotReady = snapshots.FirstOrDefault()?.Status == "available";
            snapshot = snapshots.First();
        }

        Console.WriteLine(
            $"Snapshot {snapshot.DBClusterSnapshotIdentifier} status is
{snapshot.Status}.");
        Console.WriteLine(sepBar);
        return snapshot;
    }

    /// <summary>
    /// Clean up resources from the scenario.
    /// </summary>
    /// <param name="newInstance">The instance to clean up.</param>
    /// <param name="newCluster">The cluster to clean up.</param>
    /// <param name="parameterGroup">The parameter group to clean up.</param>
    /// <returns>Async Task.</returns>
    private static async Task CleanupResources(
        DBInstance? newInstance,
        DBCluster? newCluster,
        DBClusterParameterGroup? parameterGroup)
    {
        Console.WriteLine(new string('-', 80));
        Console.WriteLine($"Clean up resources.");

        if (newInstance is not null && GetYesNoResponse($"\tClean up instance
{newInstance.DBInstanceIdentifier}? (y/n)"))
```

```
        {
            // Delete the DB instance.
            Console.WriteLine($"17. Deleting the DB instance
{newInstance.DBInstanceIdentifier}.");
            await
auroraWrapper.DeleteDBInstanceByIdentifierAsync(newInstance.DBInstanceIdentifier);
        }

        if (newCluster is not null && GetYesNoResponse($"\tClean up cluster
{newCluster.DBClusterIdentifier}? (y/n)"))
        {
            // Delete the DB cluster.
            Console.WriteLine($"18. Deleting the DB cluster
{newCluster.DBClusterIdentifier}.");
            await
auroraWrapper.DeleteDBClusterByIdentifierAsync(newCluster.DBClusterIdentifier);

            // Wait for the DB cluster to delete.
            Console.WriteLine($"19. Waiting for the DB cluster to delete...");
            bool isClusterDeleted = false;

            while (!isClusterDeleted)
            {
                Console.Write(".");
                Thread.Sleep(5000);
                var cluster = await auroraWrapper.DescribeDBClustersPagedAsync();
                isClusterDeleted = cluster.All(i => i.DBClusterIdentifier !=
newCluster.DBClusterIdentifier);
            }

            Console.WriteLine("DB cluster deleted.");
        }

        if (parameterGroup is not null && GetYesNoResponse($"\tClean up parameter
group? (y/n)"))
        {
            Console.WriteLine($"20. Deleting the DB parameter group
{parameterGroup.DBClusterParameterGroupName}.");
            await
auroraWrapper.DeleteClusterParameterGroupByNameAsync(parameterGroup.DBClusterParameterGr
            Console.WriteLine("Parameter group deleted.");
        }

        Console.WriteLine(new string('-', 80));
```

```
    }

    /// <summary>
    /// Get a yes or no response from the user.
    /// </summary>
    /// <param name="question">The question string to print on the console.</
param>
    /// <returns>True if the user responds with a yes.</returns>
    private static bool GetYesNoResponse(string question)
    {
        Console.WriteLine(question);
        var ynResponse = Console.ReadLine();
        var response = ynResponse != null &&
                       ynResponse.Equals("y",
                           StringComparison.InvariantCultureIgnoreCase);
        return response;
    }
```

Wrapper methods that are called by the scenario to manage Aurora actions.

```
using Amazon.RDS;
using Amazon.RDS.Model;

namespace AuroraActions;

/// <summary>
/// Wrapper for the Amazon Aurora cluster client operations.
/// </summary>
public class AuroraWrapper
{
    private readonly IAmazonRDS _amazonRDS;
    public AuroraWrapper(IAmazonRDS amazonRDS)
    {
        _amazonRDS = amazonRDS;
    }

    /// <summary>
    /// Get a list of DB engine versions for a particular DB engine.
    /// </summary>
    /// <param name="engine">The name of the engine.</param>
```

```
    /// <param name="parameterGroupFamily">Optional parameter group family
 name.</param>
    /// <returns>A list of DBEngineVersions.</returns>
    public async Task<List<DBEngineVersion>>
 DescribeDBEngineVersionsForEngineAsync(string engine,
        string? parameterGroupFamily = null)
    {
        var response = await _amazonRDS.DescribeDBEngineVersionsAsync(
            new DescribeDBEngineVersionsRequest()
            {
                Engine = engine,
                DBParameterGroupFamily = parameterGroupFamily
            });
        return response.DBEngineVersions;
    }

    /// <summary>
    /// Create a custom cluster parameter group.
    /// </summary>
    /// <param name="parameterGroupFamily">The family of the parameter group.</
param>
    /// <param name="groupName">The name for the new parameter group.</param>
    /// <param name="description">A description for the new parameter group.</
param>
    /// <returns>The new parameter group object.</returns>
    public async Task<DBClusterParameterGroup>
 CreateCustomClusterParameterGroupAsync(
        string parameterGroupFamily,
        string groupName,
        string description)
    {
        var request = new CreateDBClusterParameterGroupRequest
        {
            DBParameterGroupFamily = parameterGroupFamily,
            DBClusterParameterGroupName = groupName,
            Description = description,
        };

        var response = await
 _amazonRDS.CreateDBClusterParameterGroupAsync(request);
        return response.DBClusterParameterGroup;
    }

    /// <summary>
```

```
    /// Describe the cluster parameters in a parameter group.
    /// </summary>
    /// <param name="groupName">The name of the parameter group.</param>
    /// <param name="source">The optional name of the source filter.</param>
    /// <returns>The collection of parameters.</returns>
    public async Task<List<Parameter>>
 DescribeDBClusterParametersInGroupAsync(string groupName, string? source = null)
    {
        var paramList = new List<Parameter>();

        DescribeDBClusterParametersResponse response;
        var request = new DescribeDBClusterParametersRequest
        {
            DBClusterParameterGroupName = groupName,
            Source = source,
        };

        // Get the full list if there are multiple pages.
        do
        {
            response = await
 _amazonRDS.DescribeDBClusterParametersAsync(request);
            paramList.AddRange(response.Parameters);

            request.Marker = response.Marker;
        }
        while (response.Marker is not null);

        return paramList;
    }

    /// <summary>
    /// Get the description of a DB cluster parameter group by name.
    /// </summary>
    /// <param name="name">The name of the DB parameter group to describe.</
param>
    /// <returns>The parameter group description.</returns>
    public async Task<DBClusterParameterGroup?>
 DescribeCustomDBClusterParameterGroupAsync(string name)
    {
        var response = await _amazonRDS.DescribeDBClusterParameterGroupsAsync(
            new DescribeDBClusterParameterGroupsRequest()
            {
                DBClusterParameterGroupName = name
```

```
            });
        return response.DBClusterParameterGroups.FirstOrDefault();
    }

    /// <summary>
    /// Modify the specified integer parameters with new values from user input.
    /// </summary>
    /// <param name="groupName">The group name for the parameters.</param>
    /// <param name="parameters">The list of integer parameters to modify.</
param>
    /// <param name="newValue">Optional int value to set for parameters.</param>
    /// <returns>The name of the group that was modified.</returns>
    public async Task<string> ModifyIntegerParametersInGroupAsync(string
 groupName, List<Parameter> parameters, int newValue = 0)
    {
        foreach (var p in parameters)
        {
            if (p.IsModifiable.GetValueOrDefault() && p.DataType == "integer")
            {
                while (newValue == 0)
                {
                    Console.WriteLine(
                        $"Enter a new value for {p.ParameterName} from the
 allowed values {p.AllowedValues} ");

                    var choice = Console.ReadLine();
                    int.TryParse(choice, out newValue);
                }

                p.ParameterValue = newValue.ToString();
            }
        }

        var request = new ModifyDBClusterParameterGroupRequest
        {
            Parameters = parameters,
            DBClusterParameterGroupName = groupName,
        };

        var result = await
 _amazonRDS.ModifyDBClusterParameterGroupAsync(request);
        return result.DBClusterParameterGroupName;
    }
```

```
   /// <summary>
   /// Get a list of orderable DB instance options for a specific
   /// engine and engine version.
   /// </summary>
   /// <param name="engine">Name of the engine.</param>
   /// <param name="engineVersion">Version of the engine.</param>
   /// <returns>List of OrderableDBInstanceOptions.</returns>
   public async Task<List<OrderableDBInstanceOption>>
DescribeOrderableDBInstanceOptionsPagedAsync(string engine, string
engineVersion)
   {
       // Use a paginator to get a list of DB instance options.
       var results = new List<OrderableDBInstanceOption>();
       var paginateInstanceOptions =
_amazonRDS.Paginators.DescribeOrderableDBInstanceOptions(
           new DescribeOrderableDBInstanceOptionsRequest()
           {
               Engine = engine,
               EngineVersion = engineVersion,
           });
       // Get the entire list using the paginator.
       await foreach (var instanceOptions in
paginateInstanceOptions.OrderableDBInstanceOptions)
       {
           results.Add(instanceOptions);
       }
       return results;
   }

   /// <summary>
   /// Delete a particular parameter group by name.
   /// </summary>
   /// <param name="groupName">The name of the parameter group.</param>
   /// <returns>True if successful.</returns>
   public async Task<bool> DeleteClusterParameterGroupByNameAsync(string
groupName)
   {
       var request = new DeleteDBClusterParameterGroupRequest
       {
           DBClusterParameterGroupName = groupName,
       };
```

```
        var response = await
_amazonRDS.DeleteDBClusterParameterGroupAsync(request);
        return response.HttpStatusCode == System.Net.HttpStatusCode.OK;
    }

    /// <summary>
    /// Create a new cluster and database.
    /// </summary>
    /// <param name="dbName">The name of the new database.</param>
    /// <param name="clusterIdentifier">The identifier of the cluster.</param>
    /// <param name="parameterGroupName">The name of the parameter group.</param>
    /// <param name="dbEngine">The engine to use for the new cluster.</param>
    /// <param name="dbEngineVersion">The version of the engine to use.</param>
    /// <param name="adminName">The admin username.</param>
    /// <param name="adminPassword">The primary admin password.</param>
    /// <returns>The cluster object.</returns>
    public async Task<DBCluster> CreateDBClusterWithAdminAsync(
        string dbName,
        string clusterIdentifier,
        string parameterGroupName,
        string dbEngine,
        string dbEngineVersion,
        string adminName,
        string adminPassword)
    {
        var request = new CreateDBClusterRequest
        {
            DatabaseName = dbName,
            DBClusterIdentifier = clusterIdentifier,
            DBClusterParameterGroupName = parameterGroupName,
            Engine = dbEngine,
            EngineVersion = dbEngineVersion,
            MasterUsername = adminName,
            MasterUserPassword = adminPassword,
        };

        var response = await _amazonRDS.CreateDBClusterAsync(request);
        return response.DBCluster;
    }

    /// <summary>
    /// Returns a list of DB instances.
    /// </summary>
```

```
   /// <param name="dbInstanceIdentifier">Optional name of a specific DB
instance.</param>
   /// <returns>List of DB instances.</returns>
   public async Task<List<DBInstance>> DescribeDBInstancesPagedAsync(string?
dbInstanceIdentifier = null)
   {
       var results = new List<DBInstance>();
       var instancesPaginator = _amazonRDS.Paginators.DescribeDBInstances(
           new DescribeDBInstancesRequest
           {
               DBInstanceIdentifier = dbInstanceIdentifier
           });
       // Get the entire list using the paginator.
       await foreach (var instances in instancesPaginator.DBInstances)
       {
           results.Add(instances);
       }
       return results;
   }

   /// <summary>
   /// Returns a list of DB clusters.
   /// </summary>
   /// <param name="dbInstanceIdentifier">Optional name of a specific DB
cluster.</param>
   /// <returns>List of DB clusters.</returns>
   public async Task<List<DBCluster>> DescribeDBClustersPagedAsync(string?
dbClusterIdentifier = null)
   {
       var results = new List<DBCluster>();

       DescribeDBClustersResponse response;
       DescribeDBClustersRequest request = new DescribeDBClustersRequest
       {
           DBClusterIdentifier = dbClusterIdentifier
       };
       // Get the full list if there are multiple pages.
       do
       {
           response = await _amazonRDS.DescribeDBClustersAsync(request);
           if (response.DBClusters != null)
           {
               results.AddRange(response.DBClusters);
           }
```

```
            request.Marker = response.Marker;
        }
        while (response.Marker is not null);
        return results;
    }

    /// <summary>
    /// Create an Amazon Relational Database Service (Amazon RDS) DB instance
    /// with a particular set of properties. Use the action
DescribeDBInstancesAsync
    /// to determine when the DB instance is ready to use.
    /// </summary>
    /// <param name="dbInstanceIdentifier">DB instance identifier.</param>
    /// <param name="dbClusterIdentifier">DB cluster identifier.</param>
    /// <param name="dbEngine">The engine for the DB instance.</param>
    /// <param name="dbEngineVersion">Version for the DB instance.</param>
    /// <param name="instanceClass">Class for the DB instance.</param>
    /// <returns>DB instance object.</returns>
    public async Task<DBInstance> CreateDBInstanceInClusterAsync(
        string dbClusterIdentifier,
        string dbInstanceIdentifier,
        string dbEngine,
        string dbEngineVersion,
        string instanceClass)
    {
        // When creating the instance within a cluster, do not specify the name
or size.
        var response = await _amazonRDS.CreateDBInstanceAsync(
            new CreateDBInstanceRequest()
            {
                DBClusterIdentifier = dbClusterIdentifier,
                DBInstanceIdentifier = dbInstanceIdentifier,
                Engine = dbEngine,
                EngineVersion = dbEngineVersion,
                DBInstanceClass = instanceClass
            });

        return response.DBInstance;
    }

    /// <summary>
    /// Create a snapshot of a cluster.
    /// </summary>
    /// <param name="dbClusterIdentifier">DB cluster identifier.</param>
```

```
    /// <param name="snapshotIdentifier">Identifier for the snapshot.</param>
    /// <returns>DB snapshot object.</returns>
    public async Task<DBClusterSnapshot>
CreateClusterSnapshotByIdentifierAsync(string dbClusterIdentifier, string
snapshotIdentifier)
    {
        var response = await _amazonRDS.CreateDBClusterSnapshotAsync(
            new CreateDBClusterSnapshotRequest()
            {
                DBClusterIdentifier = dbClusterIdentifier,
                DBClusterSnapshotIdentifier = snapshotIdentifier,
            });

        return response.DBClusterSnapshot;
    }

    /// <summary>
    /// Return a list of DB snapshots for a particular DB cluster.
    /// </summary>
    /// <param name="dbClusterIdentifier">DB cluster identifier.</param>
    /// <returns>List of DB snapshots.</returns>
    public async Task<List<DBClusterSnapshot>>
DescribeDBClusterSnapshotsByIdentifierAsync(string dbClusterIdentifier)
    {
        var results = new List<DBClusterSnapshot>();

        DescribeDBClusterSnapshotsResponse response;
        DescribeDBClusterSnapshotsRequest request = new
DescribeDBClusterSnapshotsRequest
        {
            DBClusterIdentifier = dbClusterIdentifier
        };
        // Get the full list if there are multiple pages.
        do
        {
            response = await _amazonRDS.DescribeDBClusterSnapshotsAsync(request);
            results.AddRange(response.DBClusterSnapshots);
            request.Marker = response.Marker;
        }
        while (response.Marker is not null);
        return results;
    }

    /// <summary>
```

```
    /// Delete a particular DB cluster.
    /// </summary>
    /// <param name="dbClusterIdentifier">DB cluster identifier.</param>
    /// <returns>DB cluster object.</returns>
    public async Task<DBCluster> DeleteDBClusterByIdentifierAsync(string
 dbClusterIdentifier)
    {
        var response = await _amazonRDS.DeleteDBClusterAsync(
            new DeleteDBClusterRequest()
            {
                DBClusterIdentifier = dbClusterIdentifier,
                SkipFinalSnapshot = true
            });

        return response.DBCluster;
    }

    /// <summary>
    /// Delete a particular DB instance.
    /// </summary>
    /// <param name="dbInstanceIdentifier">DB instance identifier.</param>
    /// <returns>DB instance object.</returns>
    public async Task<DBInstance> DeleteDBInstanceByIdentifierAsync(string
 dbInstanceIdentifier)
    {
        var response = await _amazonRDS.DeleteDBInstanceAsync(
            new DeleteDBInstanceRequest()
            {
                DBInstanceIdentifier = dbInstanceIdentifier,
                SkipFinalSnapshot = true,
                DeleteAutomatedBackups = true
            });

        return response.DBInstance;
    }
}
```

- For API details, see the following topics in *Amazon SDK for .NET API Reference*.
  - CreateDBCluster
  - CreateDBClusterParameterGroup
  - CreateDBClusterSnapshot

- CreateDBInstance
- DeleteDBCluster
- DeleteDBClusterParameterGroup
- DeleteDBInstance
- DescribeDBClusterParameterGroups
- DescribeDBClusterParameters
- DescribeDBClusterSnapshots
- DescribeDBClusters
- DescribeDBEngineVersions
- DescribeDBInstances
- DescribeOrderableDBInstanceOptions
- ModifyDBClusterParameterGroup

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

//! Routine which creates an Amazon Aurora DB cluster and demonstrates several
 operations
//! on that cluster.
/*!
 \sa gettingStartedWithDBClusters()
 \param clientConfiguration: AWS client configuration.
 \return bool: Successful completion.
 */
bool AwsDoc::Aurora::gettingStartedWithDBClusters(
        const Aws::Client::ClientConfiguration &clientConfig) {
```

```
    Aws::RDS::RDSClient client(clientConfig);

    printAsterisksLine();
    std::cout << "Welcome to the Amazon Relational Database Service (Amazon
 Aurora)"
              << std::endl;
    std::cout << "get started with DB clusters demo." << std::endl;
    printAsterisksLine();

    std::cout << "Checking for an existing DB cluster parameter group named '" <<
              CLUSTER_PARAMETER_GROUP_NAME << "'." << std::endl;
    Aws::String dbParameterGroupFamily("Undefined");
    bool parameterGroupFound = true;
    {
        // 1. Check if the DB cluster parameter group already exists.
        Aws::RDS::Model::DescribeDBClusterParameterGroupsRequest request;
        request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);

        Aws::RDS::Model::DescribeDBClusterParameterGroupsOutcome outcome =
                client.DescribeDBClusterParameterGroups(request);

        if (outcome.IsSuccess()) {
            std::cout << "DB cluster parameter group named '" <<
                      CLUSTER_PARAMETER_GROUP_NAME << "' already exists." <<
 std::endl;
            dbParameterGroupFamily =
 outcome.GetResult().GetDBClusterParameterGroups()
[0].GetDBParameterGroupFamily();
        }
        else if (outcome.GetError().GetErrorType() ==
                 Aws::RDS::RDSErrors::D_B_PARAMETER_GROUP_NOT_FOUND_FAULT) {
            std::cout << "DB cluster parameter group named '" <<
                      CLUSTER_PARAMETER_GROUP_NAME << "' does not exist." <<
 std::endl;
            parameterGroupFound = false;
        }
        else {
            std::cerr << "Error with Aurora::DescribeDBClusterParameterGroups. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            return false;
        }
    }
```

```
   if (!parameterGroupFound) {
       Aws::Vector<Aws::RDS::Model::DBEngineVersion> engineVersions;

       // 2. Get available parameter group families for the specified engine.
       if (!getDBEngineVersions(DB_ENGINE, NO_PARAMETER_GROUP_FAMILY,
                                engineVersions, client)) {
           return false;
       }

       std::cout << "Getting available parameter group families for " <<
DB_ENGINE
                 << "."
                 << std::endl;
       std::vector<Aws::String> families;
       for (const Aws::RDS::Model::DBEngineVersion &version: engineVersions) {
           Aws::String family = version.GetDBParameterGroupFamily();
           if (std::find(families.begin(), families.end(), family) ==
               families.end()) {
               families.push_back(family);
               std::cout << "  " << families.size() << ": " << family <<
std::endl;
           }
       }

       int choice = askQuestionForIntRange("Which family do you want to use? ",
1,
                                           static_cast<int>(families.size()));
       dbParameterGroupFamily = families[choice - 1];
   }
   if (!parameterGroupFound) {
       // 3.  Create a DB cluster parameter group.
       Aws::RDS::Model::CreateDBClusterParameterGroupRequest request;
       request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);
       request.SetDBParameterGroupFamily(dbParameterGroupFamily);
       request.SetDescription("Example cluster parameter group.");

       Aws::RDS::Model::CreateDBClusterParameterGroupOutcome outcome =
               client.CreateDBClusterParameterGroup(request);

       if (outcome.IsSuccess()) {
           std::cout << "The DB cluster parameter group was successfully
created."
                     << std::endl;
       }
```

```
        else {
            std::cerr << "Error with Aurora::CreateDBClusterParameterGroup. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            return false;
        }
    }

    printAsterisksLine();
    std::cout << "Let's set some parameter values in your cluster parameter
group."
              << std::endl;

    Aws::Vector<Aws::RDS::Model::Parameter> autoIncrementParameters;
    // 4.  Get the parameters in the DB cluster parameter group.
    if (!getDBClusterParameters(CLUSTER_PARAMETER_GROUP_NAME,
AUTO_INCREMENT_PREFIX,
                                NO_SOURCE,
                                autoIncrementParameters,
                                client)) {
        cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, "", "", client);
        return false;
    }

    Aws::Vector<Aws::RDS::Model::Parameter> updateParameters;

    for (Aws::RDS::Model::Parameter &autoIncParameter: autoIncrementParameters) {
        if (autoIncParameter.GetIsModifiable() &&
            (autoIncParameter.GetDataType() == "integer")) {
            std::cout << "The " << autoIncParameter.GetParameterName()
                      << " is described as: " <<
                      autoIncParameter.GetDescription() << "." << std::endl;
            if (autoIncParameter.ParameterValueHasBeenSet()) {
                std::cout << "The current value is "
                          << autoIncParameter.GetParameterValue()
                          << "." << std::endl;
            }
            std::vector<int> splitValues = splitToInts(
                    autoIncParameter.GetAllowedValues(), '-');
            if (splitValues.size() == 2) {
                int newValue = askQuestionForIntRange(
                        Aws::String("Enter a new value between ") +
                        autoIncParameter.GetAllowedValues() + ": ",
                        splitValues[0], splitValues[1]);
```

```
                autoIncParameter.SetParameterValue(std::to_string(newValue));
                updateParameters.push_back(autoIncParameter);

            }
            else {
                std::cerr << "Error parsing " <<
autoIncParameter.GetAllowedValues()
                          << std::endl;
            }
        }
    }

    {
        // 5.  Modify the auto increment parameters in the DB cluster parameter
group.
        Aws::RDS::Model::ModifyDBClusterParameterGroupRequest request;
        request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);
        request.SetParameters(updateParameters);

        Aws::RDS::Model::ModifyDBClusterParameterGroupOutcome outcome =
                client.ModifyDBClusterParameterGroup(request);

        if (outcome.IsSuccess()) {
            std::cout << "The DB cluster parameter group was successfully
modified."
                      << std::endl;
        }
        else {
            std::cerr << "Error with Aurora::ModifyDBClusterParameterGroup. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
        }
    }

    std::cout
            << "You can get a list of parameters you've set by specifying a
source of 'user'."
            << std::endl;

    Aws::Vector<Aws::RDS::Model::Parameter> userParameters;
    // 6.  Display the modified parameters in the DB cluster parameter group.
    if (!getDBClusterParameters(CLUSTER_PARAMETER_GROUP_NAME, NO_NAME_PREFIX,
"user",
                                userParameters,
```

```
                                client)) {
        cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, "", "", client);
        return false;
    }

    for (const auto &userParameter: userParameters) {
        std::cout << "  " << userParameter.GetParameterName() << ", " <<
                  userParameter.GetDescription() << ", parameter value - "
                  << userParameter.GetParameterValue() << std::endl;
    }

    printAsterisksLine();
    std::cout << "Checking for an existing DB Cluster." << std::endl;

    Aws::RDS::Model::DBCluster dbCluster;
    // 7.  Check if the DB cluster already exists.
    if (!describeDBCluster(DB_CLUSTER_IDENTIFIER, dbCluster, client)) {
        cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, "", "", client);
        return false;
    }

    Aws::String engineVersionName;
    Aws::String engineName;
    if (dbCluster.DBClusterIdentifierHasBeenSet()) {
        std::cout << "The DB cluster already exists." << std::endl;
        engineVersionName = dbCluster.GetEngineVersion();
        engineName = dbCluster.GetEngine();

    }
    else {
        std::cout << "Let's create a DB cluster." << std::endl;
        const Aws::String administratorName = askQuestion(
                "Enter an administrator username for the database: ");
        const Aws::String administratorPassword = askQuestion(
                "Enter a password for the administrator (at least 8 characters):
");
        Aws::Vector<Aws::RDS::Model::DBEngineVersion> engineVersions;

        // 8.  Get a list of engine versions for the parameter group family.
        if (!getDBEngineVersions(DB_ENGINE, dbParameterGroupFamily,
engineVersions,
                                 client)) {
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, "", "", client);
            return false;
```

```
        }

        std::cout << "The available engines for your parameter group family are:"
                  << std::endl;

        int index = 1;
        for (const Aws::RDS::Model::DBEngineVersion &engineVersion:
engineVersions) {
            std::cout << "  " << index << ": " <<
engineVersion.GetEngineVersion()
                      << std::endl;
            ++index;
        }
        int choice = askQuestionForIntRange("Which engine do you want to use? ",
1,

static_cast<int>(engineVersions.size()));
        const Aws::RDS::Model::DBEngineVersion engineVersion =
engineVersions[choice -
                                                                            1];

        engineName = engineVersion.GetEngine();
        engineVersionName = engineVersion.GetEngineVersion();
        std::cout << "Creating a DB cluster named '" << DB_CLUSTER_IDENTIFIER
                  << "' and database '" << DB_NAME << "'.\n"
                  << "The DB cluster is configured to use your custom cluster
parameter group '"
                  << CLUSTER_PARAMETER_GROUP_NAME << "', and \n"
                  << "selected engine version " <<
engineVersion.GetEngineVersion()
                  << ".\nThis typically takes several minutes." << std::endl;

        Aws::RDS::Model::CreateDBClusterRequest request;
        request.SetDBClusterIdentifier(DB_CLUSTER_IDENTIFIER);
        request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);
        request.SetEngine(engineName);
        request.SetEngineVersion(engineVersionName);
        request.SetMasterUsername(administratorName);
        request.SetMasterUserPassword(administratorPassword);

        Aws::RDS::Model::CreateDBClusterOutcome outcome =
                client.CreateDBCluster(request);

        if (outcome.IsSuccess()) {
```

```
            std::cout << "The DB cluster creation has started."
                      << std::endl;
        }
        else {
            std::cerr << "Error with Aurora::CreateDBCluster. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, "", "", client);
            return false;
        }
    }

    std::cout << "Waiting for the DB cluster to become available." << std::endl;

    int counter = 0;
    // 11. Wait for the DB cluster to become available.
    do {
        std::this_thread::sleep_for(std::chrono::seconds(1));
        ++counter;
        if (counter > 900) {
            std::cerr << "Wait for cluster to become available timed out ofter "
                      << counter
                      << " seconds." << std::endl;
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                             DB_CLUSTER_IDENTIFIER, "", client);
            return false;
        }

        dbCluster = Aws::RDS::Model::DBCluster();
        if (!describeDBCluster(DB_CLUSTER_IDENTIFIER, dbCluster, client)) {
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                             DB_CLUSTER_IDENTIFIER, "", client);
            return false;
        }

        if ((counter % 20) == 0) {
            std::cout << "Current DB cluster status is '"
                      << dbCluster.GetStatus()
                      << "' after " << counter << " seconds." << std::endl;
        }
    } while (dbCluster.GetStatus() != "available");

    if (dbCluster.GetStatus() == "available") {
        std::cout << "The DB cluster has been created." << std::endl;
```

```
    }

    printAsterisksLine();
    Aws::RDS::Model::DBInstance dbInstance;
    // 11.  Check if the DB instance already exists.
    if (!describeDBInstance(DB_INSTANCE_IDENTIFIER, dbInstance, client)) {
        cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, DB_CLUSTER_IDENTIFIER, "",
                         client);
        return false;
    }

    if (dbInstance.DbInstancePortHasBeenSet()) {
        std::cout << "The DB instance already exists." << std::endl;
    }
    else {
        std::cout << "Let's create a DB instance." << std::endl;

        Aws::String dbInstanceClass;
        // 12.  Get a list of instance classes.
        if (!chooseDBInstanceClass(engineName,
                                   engineVersionName,
                                   dbInstanceClass,
                                   client)) {
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, DB_CLUSTER_IDENTIFIER,
""",
                             client);
            return false;
        }

        std::cout << "Creating a DB instance named '" << DB_INSTANCE_IDENTIFIER
                  << "' with selected DB instance class '" << dbInstanceClass
                  << "'.\nThis typically takes several minutes." << std::endl;

        // 13. Create a DB instance.
        Aws::RDS::Model::CreateDBInstanceRequest request;
        request.SetDBInstanceIdentifier(DB_INSTANCE_IDENTIFIER);
        request.SetDBClusterIdentifier(DB_CLUSTER_IDENTIFIER);
        request.SetEngine(engineName);
        request.SetDBInstanceClass(dbInstanceClass);

        Aws::RDS::Model::CreateDBInstanceOutcome outcome =
                client.CreateDBInstance(request);

        if (outcome.IsSuccess()) {
```

```
            std::cout << "The DB instance creation has started."
                      << std::endl;
        }
        else {
            std::cerr << "Error with RDS::CreateDBInstance. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, DB_CLUSTER_IDENTIFIER,
"",
                             client);
            return false;
        }
    }

    std::cout << "Waiting for the DB instance to become available." << std::endl;

    counter = 0;
    // 14. Wait for the DB instance to become available.
    do {
        std::this_thread::sleep_for(std::chrono::seconds(1));
        ++counter;
        if (counter > 900) {
            std::cerr << "Wait for instance to become available timed out ofter "
                      << counter
                      << " seconds." << std::endl;
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                             DB_CLUSTER_IDENTIFIER, DB_INSTANCE_IDENTIFIER,
client);
            return false;
        }

        dbInstance = Aws::RDS::Model::DBInstance();
        if (!describeDBInstance(DB_INSTANCE_IDENTIFIER, dbInstance, client)) {
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                             DB_CLUSTER_IDENTIFIER, DB_INSTANCE_IDENTIFIER,
client);
            return false;
        }

        if ((counter % 20) == 0) {
            std::cout << "Current DB instance status is '"
                      << dbInstance.GetDBInstanceStatus()
                      << "' after " << counter << " seconds." << std::endl;
        }
```

```
   } while (dbInstance.GetDBInstanceStatus() != "available");

   if (dbInstance.GetDBInstanceStatus() == "available") {
       std::cout << "The DB instance has been created." << std::endl;
   }

   // 15. Display the connection string that can be used to connect a 'mysql'
shell to the database.
   displayConnection(dbCluster);

   printAsterisksLine();

   if (askYesNoQuestion(
           "Do you want to create a snapshot of your DB cluster (y/n)? ")) {
       Aws::String snapshotID(DB_CLUSTER_IDENTIFIER + "-" +
                              Aws::String(Aws::Utils::UUID::RandomUUID()));
       {
           std::cout << "Creating a snapshot named " << snapshotID << "." <<
std::endl;
           std::cout << "This typically takes a few minutes." << std::endl;

           // 16. Create a snapshot of the DB cluster. (CreateDBClusterSnapshot)
           Aws::RDS::Model::CreateDBClusterSnapshotRequest request;
           request.SetDBClusterIdentifier(DB_CLUSTER_IDENTIFIER);
           request.SetDBClusterSnapshotIdentifier(snapshotID);

           Aws::RDS::Model::CreateDBClusterSnapshotOutcome outcome =
                   client.CreateDBClusterSnapshot(request);

           if (outcome.IsSuccess()) {
               std::cout << "Snapshot creation has started."
                         << std::endl;
           }
           else {
               std::cerr << "Error with Aurora::CreateDBClusterSnapshot. "
                         << outcome.GetError().GetMessage()
                         << std::endl;
               cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                                DB_CLUSTER_IDENTIFIER, DB_INSTANCE_IDENTIFIER,
client);
               return false;
           }
       }
```

```
        std::cout << "Waiting for the snapshot to become available." <<
std::endl;

        Aws::RDS::Model::DBClusterSnapshot snapshot;
        counter = 0;
        do {
            std::this_thread::sleep_for(std::chrono::seconds(1));
            ++counter;
            if (counter > 600) {
                std::cerr << "Wait for snapshot to be available timed out ofter "
                          << counter
                          << " seconds." << std::endl;
                cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                                 DB_CLUSTER_IDENTIFIER, DB_INSTANCE_IDENTIFIER,
client);
                return false;
            }

            // 17. Wait for the snapshot to become available.
            Aws::RDS::Model::DescribeDBClusterSnapshotsRequest request;
            request.SetDBClusterSnapshotIdentifier(snapshotID);

            Aws::RDS::Model::DescribeDBClusterSnapshotsOutcome outcome =
                    client.DescribeDBClusterSnapshots(request);

            if (outcome.IsSuccess()) {
                snapshot = outcome.GetResult().GetDBClusterSnapshots()[0];
            }
            else {
                std::cerr << "Error with Aurora::DescribeDBClusterSnapshots. "
                          << outcome.GetError().GetMessage()
                          << std::endl;
                cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                                 DB_CLUSTER_IDENTIFIER, DB_INSTANCE_IDENTIFIER,
client);
                return false;
            }

            if ((counter % 20) == 0) {
                std::cout << "Current snapshot status is '"
                          << snapshot.GetStatus()
                          << "' after " << counter << " seconds." << std::endl;
            }
        } while (snapshot.GetStatus() != "available");
```

```
        if (snapshot.GetStatus() != "available") {
            std::cout << "A snapshot has been created." << std::endl;
        }
    }

    printAsterisksLine();

    bool result = true;
    if (askYesNoQuestion(
            "Do you want to delete the DB cluster, DB instance, and parameter
 group (y/n)? ")) {
        result = cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                                  DB_CLUSTER_IDENTIFIER, DB_INSTANCE_IDENTIFIER,
                                  client);
    }

    return result;
}

//! Routine which gets a DB cluster description.
/*!
 \sa describeDBCluster()
 \param dbClusterIdentifier: A DB cluster identifier.
 \param clusterResult: The 'DBCluster' object containing the description.
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
 */
bool AwsDoc::Aurora::describeDBCluster(const Aws::String &dbClusterIdentifier,
                                       Aws::RDS::Model::DBCluster &clusterResult,
                                       const Aws::RDS::RDSClient &client) {
    Aws::RDS::Model::DescribeDBClustersRequest request;
    request.SetDBClusterIdentifier(dbClusterIdentifier);

    Aws::RDS::Model::DescribeDBClustersOutcome outcome =
            client.DescribeDBClusters(request);

    bool result = true;
    if (outcome.IsSuccess()) {
        clusterResult = outcome.GetResult().GetDBClusters()[0];
    }
    else if (outcome.GetError().GetErrorType() !=
             Aws::RDS::RDSErrors::D_B_CLUSTER_NOT_FOUND_FAULT) {
        result = false;
```

```
        std::cerr << "Error with Aurora::GDescribeDBClusters. "
                  << outcome.GetError().GetMessage()
                  << std::endl;
    }
        // This example does not log an error if the DB cluster does not exist.
        // Instead, clusterResult is set to empty.
    else {
        clusterResult = Aws::RDS::Model::DBCluster();
    }

    return result;

}


//! Routine which gets DB parameters using the 'DescribeDBClusterParameters' api.
/*!
 \sa getDBCLusterParameters()
 \param parameterGroupName: The name of the cluster parameter group.
 \param namePrefix: Prefix string to filter results by parameter name.
 \param source: A source such as 'user', ignored if empty.
 \param parametersResult: Vector of 'Parameter' objects returned by the routine.
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
 */
bool AwsDoc::Aurora::getDBCLusterParameters(const Aws::String
 &parameterGroupName,
                                             const Aws::String &namePrefix,
                                             const Aws::String &source,

 Aws::Vector<Aws::RDS::Model::Parameter> &parametersResult,
                                             const Aws::RDS::RDSClient &client) {
    Aws::String marker; // The marker is used for pagination.
    do {
        Aws::RDS::Model::DescribeDBClusterParametersRequest request;
        request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);
        if (!marker.empty()) {
            request.SetMarker(marker);
        }
        if (!source.empty()) {
            request.SetSource(source);
        }

        Aws::RDS::Model::DescribeDBClusterParametersOutcome outcome =
```

```
                client.DescribeDBClusterParameters(request);

        if (outcome.IsSuccess()) {
            const Aws::Vector<Aws::RDS::Model::Parameter> &parameters =
                    outcome.GetResult().GetParameters();
            for (const Aws::RDS::Model::Parameter &parameter: parameters) {
                if (!namePrefix.empty()) {
                    if (parameter.GetParameterName().find(namePrefix) == 0) {
                        parametersResult.push_back(parameter);
                    }
                }
                else {
                    parametersResult.push_back(parameter);
                }
            }

            marker = outcome.GetResult().GetMarker();
        }
        else {
            std::cerr << "Error with Aurora::DescribeDBClusterParameters. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            return false;
        }
    } while (!marker.empty());

    return true;
}


//! Routine which gets available DB engine versions for an engine name and
//! an optional parameter group family.
/*!
 \sa getDBEngineVersions()
 \param engineName: A DB engine name.
 \param parameterGroupFamily: A parameter group family name, ignored if empty.
 \param engineVersionsResult: Vector of 'DBEngineVersion' objects returned by the
 routine.
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
 */
bool AwsDoc::Aurora::getDBEngineVersions(const Aws::String &engineName,
                                         const Aws::String &parameterGroupFamily,
```

```
 Aws::Vector<Aws::RDS::Model::DBEngineVersion> &engineVersionsResult,
                                          const Aws::RDS::RDSClient &client) {
    Aws::RDS::Model::DescribeDBEngineVersionsRequest request;
    request.SetEngine(engineName);
    if (!parameterGroupFamily.empty()) {
        request.SetDBParameterGroupFamily(parameterGroupFamily);
    }

    engineVersionsResult.clear();
    Aws::String marker; // The marker is used for pagination.
    do {
        if (!marker.empty()) {
            request.SetMarker(marker);
        }

        Aws::RDS::Model::DescribeDBEngineVersionsOutcome outcome =
                client.DescribeDBEngineVersions(request);

        if (outcome.IsSuccess()) {
            const Aws::Vector<Aws::RDS::Model::DBEngineVersion> &engineVersions =
                    outcome.GetResult().GetDBEngineVersions();

            engineVersionsResult.insert(engineVersionsResult.end(),
                                        engineVersions.begin(),
 engineVersions.end());
            marker  = outcome.GetResult().GetMarker();
        }
        else {
            std::cerr << "Error with Aurora::DescribeDBEngineVersionsRequest. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
        }
    } while (!marker.empty());

    return true;
}


//! Routine which gets a DB instance description.
/*!
 \sa describeDBCluster()
 \param dbInstanceIdentifier: A DB instance identifier.
 \param instanceResult: The 'DBInstance' object containing the description.
```

```
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
 */
bool AwsDoc::Aurora::describeDBInstance(const Aws::String &dbInstanceIdentifier,
                                        Aws::RDS::Model::DBInstance
 &instanceResult,
                                        const Aws::RDS::RDSClient &client) {
    Aws::RDS::Model::DescribeDBInstancesRequest request;
    request.SetDBInstanceIdentifier(dbInstanceIdentifier);

    Aws::RDS::Model::DescribeDBInstancesOutcome outcome =
            client.DescribeDBInstances(request);

    bool result = true;
    if (outcome.IsSuccess()) {
        instanceResult = outcome.GetResult().GetDBInstances()[0];
    }
    else if (outcome.GetError().GetErrorType() !=
             Aws::RDS::RDSErrors::D_B_INSTANCE_NOT_FOUND_FAULT) {
        result = false;
        std::cerr << "Error with Aurora::DescribeDBInstances. "
                  << outcome.GetError().GetMessage()
                  << std::endl;
    }
        // This example does not log an error if the DB instance does not exist.
        // Instead, instanceResult is set to empty.
    else {
        instanceResult = Aws::RDS::Model::DBInstance();
    }

    return result;
}


//! Routine which gets available DB instance classes, displays the list
//! to the user, and returns the user selection.
/*!
 \sa chooseDBInstanceClass()
 \param engineName: The DB engine name.
 \param engineVersion: The DB engine version.
 \param dbInstanceClass: String for DB instance class chosen by the user.
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
 */
```

```
bool AwsDoc::Aurora::chooseDBInstanceClass(const Aws::String &engine,
                                           const Aws::String &engineVersion,
                                           Aws::String &dbInstanceClass,
                                           const Aws::RDS::RDSClient &client) {
   std::vector<Aws::String> instanceClasses;
   Aws::String marker; // The marker is used for pagination.
   do {
       Aws::RDS::Model::DescribeOrderableDBInstanceOptionsRequest request;
       request.SetEngine(engine);
       request.SetEngineVersion(engineVersion);
       if (!marker.empty()) {
           request.SetMarker(marker);
       }

       Aws::RDS::Model::DescribeOrderableDBInstanceOptionsOutcome outcome =
               client.DescribeOrderableDBInstanceOptions(request);

       if (outcome.IsSuccess()) {
           const Aws::Vector<Aws::RDS::Model::OrderableDBInstanceOption>
&options =
                   outcome.GetResult().GetOrderableDBInstanceOptions();
           for (const Aws::RDS::Model::OrderableDBInstanceOption &option:
options) {
               const Aws::String &instanceClass = option.GetDBInstanceClass();
               if (std::find(instanceClasses.begin(), instanceClasses.end(),
                             instanceClass) == instanceClasses.end()) {
                   instanceClasses.push_back(instanceClass);
               }
           }
           marker = outcome.GetResult().GetMarker();
       }
       else {
           std::cerr << "Error with Aurora::DescribeOrderableDBInstanceOptions.
"
                     << outcome.GetError().GetMessage()
                     << std::endl;
           return false;
       }
   } while (!marker.empty());

   std::cout << "The available DB instance classes for your database engine
are:"
             << std::endl;
   for (int i = 0; i < instanceClasses.size(); ++i) {
```

```
        std::cout << "   " << i + 1 << ": " << instanceClasses[i] << std::endl;
    }

    int choice = askQuestionForIntRange(
            "Which DB instance class do you want to use? ",
            1, static_cast<int>(instanceClasses.size()));
    dbInstanceClass = instanceClasses[choice - 1];
    return true;
}

//! Routine which deletes resources created by the scenario.
/*!
\sa cleanUpResources()
\param parameterGroupName: A parameter group name, this may be empty.
\param dbInstanceIdentifier: A DB instance identifier, this may be empty.
\param client: 'RDSClient' instance.
\return bool: Successful completion.
*/
bool AwsDoc::Aurora::cleanUpResources(const Aws::String &parameterGroupName,
                                      const Aws::String &dbClusterIdentifier,
                                      const Aws::String &dbInstanceIdentifier,
                                      const Aws::RDS::RDSClient &client) {
    bool result = true;
    bool instanceDeleting = false;
    bool clusterDeleting = false;
    if (!dbInstanceIdentifier.empty()) {
        {
            // 18. Delete the DB instance.
            Aws::RDS::Model::DeleteDBInstanceRequest request;
            request.SetDBInstanceIdentifier(dbInstanceIdentifier);
            request.SetSkipFinalSnapshot(true);
            request.SetDeleteAutomatedBackups(true);

            Aws::RDS::Model::DeleteDBInstanceOutcome outcome =
                    client.DeleteDBInstance(request);

            if (outcome.IsSuccess()) {
                std::cout << "DB instance deletion has started."
                          << std::endl;
                instanceDeleting = true;
                std::cout
                        << "Waiting for DB instance to delete before deleting the
 parameter group."
                        << std::endl;
```

```
            }
            else {
                std::cerr << "Error with Aurora::DeleteDBInstance. "
                          << outcome.GetError().GetMessage()
                          << std::endl;
                result = false;
            }
        }
    }

    if (!dbClusterIdentifier.empty()) {
        {
            // 19. Delete the DB cluster.
            Aws::RDS::Model::DeleteDBClusterRequest request;
            request.SetDBClusterIdentifier(dbClusterIdentifier);
            request.SetSkipFinalSnapshot(true);

            Aws::RDS::Model::DeleteDBClusterOutcome outcome =
                    client.DeleteDBCluster(request);

            if (outcome.IsSuccess()) {
                std::cout << "DB cluster deletion has started."
                          << std::endl;
                clusterDeleting = true;
                std::cout
                        << "Waiting for DB cluster to delete before deleting the
parameter group."
                        << std::endl;
                std::cout << "This may take a while." << std::endl;
            }
            else {
                std::cerr << "Error with Aurora::DeleteDBCluster. "
                          << outcome.GetError().GetMessage()
                          << std::endl;
                result = false;
            }
        }
    }
    int counter = 0;

    while (clusterDeleting || instanceDeleting) {
        // 20. Wait for the DB cluster and instance to be deleted.
        std::this_thread::sleep_for(std::chrono::seconds(1));
        ++counter;
```

```
        if (counter > 800) {
            std::cerr << "Wait for instance to delete timed out ofter " <<
counter
                      << " seconds." << std::endl;
            return false;
        }

        Aws::RDS::Model::DBInstance dbInstance = Aws::RDS::Model::DBInstance();
        if (instanceDeleting) {
            if (!describeDBInstance(dbInstanceIdentifier, dbInstance, client)) {
                return false;
            }
            instanceDeleting = dbInstance.DBInstanceIdentifierHasBeenSet();
        }

        Aws::RDS::Model::DBCluster dbCluster = Aws::RDS::Model::DBCluster();
        if (clusterDeleting) {
            if (!describeDBCluster(dbClusterIdentifier, dbCluster, client)) {
                return false;
            }

            clusterDeleting = dbCluster.DBClusterIdentifierHasBeenSet();
        }

        if ((counter % 20) == 0) {
            if (instanceDeleting) {
                std::cout << "Current DB instance status is '"
                          << dbInstance.GetDBInstanceStatus() << "." <<
std::endl;
            }

            if (clusterDeleting) {
                std::cout << "Current DB cluster status is '"
                          << dbCluster.GetStatus() << "." << std::endl;
            }
        }
    }

    if (!parameterGroupName.empty()) {
        // 21. Delete the DB cluster parameter group.
        Aws::RDS::Model::DeleteDBClusterParameterGroupRequest request;
        request.SetDBClusterParameterGroupName(parameterGroupName);

        Aws::RDS::Model::DeleteDBClusterParameterGroupOutcome outcome =
```

```
                client.DeleteDBClusterParameterGroup(request);

        if (outcome.IsSuccess()) {
            std::cout << "The DB parameter group was successfully deleted."
                      << std::endl;
        }
        else {
            std::cerr << "Error with Aurora::DeleteDBClusterParameterGroup. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            result = false;
        }
    }

    return result;
}
```

- For API details, see the following topics in *Amazon SDK for C++ API Reference*.
  - CreateDBCluster
  - CreateDBClusterParameterGroup
  - CreateDBClusterSnapshot
  - CreateDBInstance
  - DeleteDBCluster
  - DeleteDBClusterParameterGroup
  - DeleteDBInstance
  - DescribeDBClusterParameterGroups
  - DescribeDBClusterParameters
  - DescribeDBClusterSnapshots
  - DescribeDBClusters
  - DescribeDBEngineVersions
  - DescribeDBInstances
  - DescribeOrderableDBInstanceOptions
  - ModifyDBClusterParameterGroup

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

Run an interactive scenario at a command prompt.

```
import (
 "aurora/actions"
 "context"
 "fmt"
 "log"
 "slices"
 "sort"
 "strconv"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/google/uuid"
)

// GetStartedClusters is an interactive example that shows you how to use the AWS
 SDK for Go
// with Amazon Aurora to do the following:
//
// 1. Create a custom DB cluster parameter group and set parameter values.
// 2. Create an Aurora DB cluster that is configured to use the parameter group.
// 3. Create a DB instance in the DB cluster that contains a database.
// 4. Take a snapshot of the DB cluster.
// 5. Delete the DB instance, DB cluster, and parameter group.
type GetStartedClusters struct {
 sdkConfig  aws.Config
 dbClusters actions.DbClusters
```

```
 questioner demotools.IQuestioner
 helper     IScenarioHelper
 isTestRun  bool
}

// NewGetStartedClusters constructs a GetStartedClusters instance from a
 configuration.
// It uses the specified config to get an Amazon Relational Database Service
 (Amazon RDS)
// client and create wrappers for the actions used in the scenario.
func NewGetStartedClusters(sdkConfig aws.Config, questioner
 demotools.IQuestioner,
 helper IScenarioHelper) GetStartedClusters {
 auroraClient := rds.NewFromConfig(sdkConfig)
 return GetStartedClusters{
  sdkConfig:  sdkConfig,
  dbClusters: actions.DbClusters{AuroraClient: auroraClient},
  questioner: questioner,
  helper:     helper,
 }
}

// Run runs the interactive scenario.
func (scenario GetStartedClusters) Run(ctx context.Context, dbEngine string,
 parameterGroupName string,
 clusterName string, dbName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon Aurora DB Cluster demo.")
 log.Println(strings.Repeat("-", 88))

 parameterGroup := scenario.CreateParameterGroup(ctx, dbEngine,
 parameterGroupName)
 scenario.SetUserParameters(ctx, parameterGroupName)
 cluster := scenario.CreateCluster(ctx, clusterName, dbEngine, dbName,
 parameterGroup)
 scenario.helper.Pause(5)
 dbInstance := scenario.CreateInstance(ctx, cluster)
 scenario.DisplayConnection(cluster)
```

```
 scenario.CreateSnapshot(ctx, clusterName)
 scenario.Cleanup(ctx, dbInstance, cluster, parameterGroup)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}

// CreateParameterGroup shows how to get available engine versions for a
 specified
// database engine and create a DB cluster parameter group that is compatible
 with a
// selected engine family.
func (scenario GetStartedClusters) CreateParameterGroup(ctx context.Context,
 dbEngine string,
 parameterGroupName string) *types.DBClusterParameterGroup {

 log.Printf("Checking for an existing DB cluster parameter group named %v.\n",
  parameterGroupName)
 parameterGroup, err := scenario.dbClusters.GetParameterGroup(ctx,
 parameterGroupName)
 if err != nil {
  panic(err)
 }
 if parameterGroup == nil {
  log.Printf("Getting available database engine versions for %v.\n", dbEngine)
  engineVersions, err := scenario.dbClusters.GetEngineVersions(ctx, dbEngine, "")
  if err != nil {
   panic(err)
  }

  familySet := map[string]struct{}{}
  for _, family := range engineVersions {
   familySet[*family.DBParameterGroupFamily] = struct{}{}
  }
  var families []string
  for family := range familySet {
   families = append(families, family)
  }
  sort.Strings(families)
  familyIndex := scenario.questioner.AskChoice("Which family do you want to use?
\n", families)
  log.Println("Creating a DB cluster parameter group.")
  _, err = scenario.dbClusters.CreateParameterGroup(
```

```
    ctx, parameterGroupName, families[familyIndex], "Example parameter group.")
   if err != nil {
    panic(err)
   }
   parameterGroup, err = scenario.dbClusters.GetParameterGroup(ctx,
  parameterGroupName)
   if err != nil {
    panic(err)
   }
  }
  log.Printf("Parameter group %v:\n", *parameterGroup.DBParameterGroupFamily)
  log.Printf("\tName: %v\n", *parameterGroup.DBClusterParameterGroupName)
  log.Printf("\tARN: %v\n", *parameterGroup.DBClusterParameterGroupArn)
  log.Printf("\tFamily: %v\n", *parameterGroup.DBParameterGroupFamily)
  log.Printf("\tDescription: %v\n", *parameterGroup.Description)
  log.Println(strings.Repeat("-", 88))
  return parameterGroup

}

// SetUserParameters shows how to get the parameters contained in a custom
 parameter
// group and update some of the parameter values in the group.
func (scenario GetStartedClusters) SetUserParameters(ctx context.Context,
 parameterGroupName string) {
 log.Println("Let's set some parameter values in your parameter group.")
 dbParameters, err := scenario.dbClusters.GetParameters(ctx, parameterGroupName,
 "")
 if err != nil {
  panic(err)
 }
 var updateParams []types.Parameter
 for _, dbParam := range dbParameters {
  if strings.HasPrefix(*dbParam.ParameterName, "auto_increment") &&
   *dbParam.IsModifiable && *dbParam.DataType == "integer" {
   log.Printf("The %v parameter is described as:\n\t%v",
    *dbParam.ParameterName, *dbParam.Description)
   rangeSplit := strings.Split(*dbParam.AllowedValues, "-")
   lower, _ := strconv.Atoi(rangeSplit[0])
   upper, _ := strconv.Atoi(rangeSplit[1])
   newValue := scenario.questioner.AskInt(
    fmt.Sprintf("Enter a value between %v and %v:", lower, upper),
    demotools.InIntRange{Lower: lower, Upper: upper})
   dbParam.ParameterValue = aws.String(strconv.Itoa(newValue))
```

```
    updateParams = append(updateParams, dbParam)
   }
  }
  err = scenario.dbClusters.UpdateParameters(ctx, parameterGroupName,
  updateParams)
  if err != nil {
   panic(err)
  }
  log.Println("You can get a list of parameters you've set by specifying a source
  of 'user'.")
  userParameters, err := scenario.dbClusters.GetParameters(ctx,
  parameterGroupName, "user")
  if err != nil {
   panic(err)
  }
  log.Println("Here are the parameters you've set:")
  for _, param := range userParameters {
   log.Printf("\t%v: %v\n", *param.ParameterName, *param.ParameterValue)
  }
  log.Println(strings.Repeat("-", 88))
}

// CreateCluster shows how to create an Aurora DB cluster that contains a
 database
// of a specified type. The database is also configured to use a custom DB
 cluster
// parameter group.
func (scenario GetStartedClusters) CreateCluster(ctx context.Context, clusterName
 string, dbEngine string,
 dbName string, parameterGroup *types.DBClusterParameterGroup) *types.DBCluster {

 log.Println("Checking for an existing DB cluster.")
 cluster, err := scenario.dbClusters.GetDbCluster(ctx, clusterName)
 if err != nil {
  panic(err)
 }
 if cluster == nil {
  adminUsername := scenario.questioner.Ask(
   "Enter an administrator user name for the database: ", demotools.NotEmpty{})
  adminPassword := scenario.questioner.Ask(
   "Enter a password for the administrator (at least 8 characters): ",
 demotools.NotEmpty{})
  engineVersions, err := scenario.dbClusters.GetEngineVersions(ctx, dbEngine,
 *parameterGroup.DBParameterGroupFamily)
```

```
  if err != nil {
   panic(err)
  }
  var engineChoices []string
  for _, engine := range engineVersions {
   engineChoices = append(engineChoices, *engine.EngineVersion)
  }
  log.Println("The available engines for your parameter group are:")
  engineIndex := scenario.questioner.AskChoice("Which engine do you want to use?
\n", engineChoices)
  log.Printf("Creating DB cluster %v and database %v.\n", clusterName, dbName)
  log.Printf("The DB cluster is configured to use\nyour custom parameter group %v
\n",
   *parameterGroup.DBClusterParameterGroupName)
  log.Printf("and selected engine %v.\n", engineChoices[engineIndex])
  log.Println("This typically takes several minutes.")
  cluster, err = scenario.dbClusters.CreateDbCluster(
   ctx, clusterName, *parameterGroup.DBClusterParameterGroupName, dbName,
 dbEngine,
   engineChoices[engineIndex], adminUsername, adminPassword)
  if err != nil {
   panic(err)
  }
  for *cluster.Status != "available" {
   scenario.helper.Pause(30)
   cluster, err = scenario.dbClusters.GetDbCluster(ctx, clusterName)
   if err != nil {
    panic(err)
   }
   log.Println("Cluster created and available.")
  }
 }
 log.Println("Cluster data:")
 log.Printf("\tDBClusterIdentifier: %v\n", *cluster.DBClusterIdentifier)
 log.Printf("\tARN: %v\n", *cluster.DBClusterArn)
 log.Printf("\tStatus: %v\n", *cluster.Status)
 log.Printf("\tEngine: %v\n", *cluster.Engine)
 log.Printf("\tEngine version: %v\n", *cluster.EngineVersion)
 log.Printf("\tDBClusterParameterGroup: %v\n", *cluster.DBClusterParameterGroup)
 log.Printf("\tEngineMode: %v\n", *cluster.EngineMode)
 log.Println(strings.Repeat("-", 88))
 return cluster
}
```

```
// CreateInstance shows how to create a DB instance in an existing Aurora DB
 cluster.
// A new DB cluster contains no DB instances, so you must add one. The first DB
 instance
// that is added to a DB cluster defaults to a read-write DB instance.
func (scenario GetStartedClusters) CreateInstance(ctx context.Context, cluster
 *types.DBCluster) *types.DBInstance {
 log.Println("Checking for an existing database instance.")
 dbInstance, err := scenario.dbClusters.GetInstance(ctx,
 *cluster.DBClusterIdentifier)
 if err != nil {
  panic(err)
 }
 if dbInstance == nil {
  log.Println("Let's create a database instance in your DB cluster.")
  log.Println("First, choose a DB instance type:")
  instOpts, err := scenario.dbClusters.GetOrderableInstances(
   ctx, *cluster.Engine, *cluster.EngineVersion)
  if err != nil {
   panic(err)
  }
  var instChoices []string
  for _, opt := range instOpts {
   instChoices = append(instChoices, *opt.DBInstanceClass)
  }
  slices.Sort(instChoices)
  instChoices = slices.Compact(instChoices)
  instIndex := scenario.questioner.AskChoice(
   "Which DB instance class do you want to use?\n", instChoices)
  log.Println("Creating a database instance. This typically takes several
 minutes.")
  dbInstance, err = scenario.dbClusters.CreateInstanceInCluster(
   ctx, *cluster.DBClusterIdentifier, *cluster.DBClusterIdentifier,
 *cluster.Engine,
   instChoices[instIndex])
  if err != nil {
   panic(err)
  }
  for *dbInstance.DBInstanceStatus != "available" {
   scenario.helper.Pause(30)
   dbInstance, err = scenario.dbClusters.GetInstance(ctx,
 *cluster.DBClusterIdentifier)
   if err != nil {
    panic(err)
```

```
   }
  }
 }
 log.Println("Instance data:")
 log.Printf("\tDBInstanceIdentifier: %v\n", *dbInstance.DBInstanceIdentifier)
 log.Printf("\tARN: %v\n", *dbInstance.DBInstanceArn)
 log.Printf("\tStatus: %v\n", *dbInstance.DBInstanceStatus)
 log.Printf("\tEngine: %v\n", *dbInstance.Engine)
 log.Printf("\tEngine version: %v\n", *dbInstance.EngineVersion)
 log.Println(strings.Repeat("-", 88))
 return dbInstance
}

// DisplayConnection displays connection information about an Aurora DB cluster
 and tips
// on how to connect to it.
func (scenario GetStartedClusters) DisplayConnection(cluster *types.DBCluster) {
 log.Println(
  "You can now connect to your database using your favorite MySql client.\n" +
   "One way to connect is by using the 'mysql' shell on an Amazon EC2 instance\n"
 +
   "that is running in the same VPC as your database cluster. Pass the endpoint,
\n" +
   "port, and administrator user name to 'mysql' and enter your password\n" +
   "when prompted:")
 log.Printf("\n\tmysql -h %v -P %v -u %v -p\n",
  *cluster.Endpoint, *cluster.Port, *cluster.MasterUsername)
 log.Println("For more information, see the User Guide for Aurora:\n" +
  "\thttps://docs.aws.amazon.com/AmazonRDS/latest/AuroraUserGuide/
CHAP_GettingStartedAurora.CreatingConnecting.Aurora.html#CHAP_GettingStartedAurora.Aurora
 log.Println(strings.Repeat("-", 88))
}

// CreateSnapshot shows how to create a DB cluster snapshot and wait until it's
 available.
func (scenario GetStartedClusters) CreateSnapshot(ctx context.Context,
 clusterName string) {
 if scenario.questioner.AskBool(
  "Do you want to create a snapshot of your DB cluster (y/n)? ", "y") {
  snapshotId := fmt.Sprintf("%v-%v", clusterName, scenario.helper.UniqueId())
  log.Printf("Creating a snapshot named %v. This typically takes a few minutes.
\n", snapshotId)
  snapshot, err := scenario.dbClusters.CreateClusterSnapshot(ctx, clusterName,
 snapshotId)
```

```
  if err != nil {
   panic(err)
  }
  for *snapshot.Status != "available" {
   scenario.helper.Pause(30)
   snapshot, err = scenario.dbClusters.GetClusterSnapshot(ctx, snapshotId)
   if err != nil {
    panic(err)
   }
  }
  log.Println("Snapshot data:")
  log.Printf("\tDBClusterSnapshotIdentifier: %v\n",
 *snapshot.DBClusterSnapshotIdentifier)
  log.Printf("\tARN: %v\n", *snapshot.DBClusterSnapshotArn)
  log.Printf("\tStatus: %v\n", *snapshot.Status)
  log.Printf("\tEngine: %v\n", *snapshot.Engine)
  log.Printf("\tEngine version: %v\n", *snapshot.EngineVersion)
  log.Printf("\tDBClusterIdentifier: %v\n", *snapshot.DBClusterIdentifier)
  log.Printf("\tSnapshotCreateTime: %v\n", *snapshot.SnapshotCreateTime)
  log.Println(strings.Repeat("-", 88))
 }
}

// Cleanup shows how to clean up a DB instance, DB cluster, and DB cluster
 parameter group.
// Before the DB cluster parameter group can be deleted, all associated DB
 instances and
// DB clusters must first be deleted.
func (scenario GetStartedClusters) Cleanup(ctx context.Context, dbInstance
 *types.DBInstance, cluster *types.DBCluster,
 parameterGroup *types.DBClusterParameterGroup) {

 if scenario.questioner.AskBool(
  "\nDo you want to delete the database instance, DB cluster, and parameter group
 (y/n)? ", "y") {
  log.Printf("Deleting database instance %v.\n",
 *dbInstance.DBInstanceIdentifier)
  err := scenario.dbClusters.DeleteInstance(ctx,
 *dbInstance.DBInstanceIdentifier)
  if err != nil {
   panic(err)
  }
  log.Printf("Deleting database cluster %v.\n", *cluster.DBClusterIdentifier)
  err = scenario.dbClusters.DeleteDbCluster(ctx, *cluster.DBClusterIdentifier)
```

```
  if err != nil {
   panic(err)
  }
  log.Println(
   "Waiting for the DB instance and DB cluster to delete. This typically takes
 several minutes.")
  for dbInstance != nil || cluster != nil {
   scenario.helper.Pause(30)
   if dbInstance != nil {
    dbInstance, err = scenario.dbClusters.GetInstance(ctx,
 *dbInstance.DBInstanceIdentifier)
    if err != nil {
     panic(err)
    }
   }
   if cluster != nil {
    cluster, err = scenario.dbClusters.GetDbCluster(ctx,
 *cluster.DBClusterIdentifier)
    if err != nil {
     panic(err)
    }
   }
  }
  log.Printf("Deleting parameter group %v.",
 *parameterGroup.DBClusterParameterGroupName)
  err = scenario.dbClusters.DeleteParameterGroup(ctx,
 *parameterGroup.DBClusterParameterGroupName)
  if err != nil {
   panic(err)
  }
 }
}

// IScenarioHelper abstracts the function from a scenario so that it
// can be mocked for unit testing.
type IScenarioHelper interface {
 Pause(secs int)
 UniqueId() string
}
type ScenarioHelper struct{}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 time.Sleep(time.Duration(secs) * time.Second)
```

```
}

// UniqueId returns a new UUID.
func (helper ScenarioHelper) UniqueId() string {
 return uuid.New().String()
}
```

Define functions that are called by the scenario to manage Aurora actions.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}


// GetParameterGroup gets a DB cluster parameter group by name.
func (clusters *DbClusters) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBClusterParameterGroup, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterParameterGroups(
  ctx, &rds.DescribeDBClusterParameterGroupsInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
```

```
  return nil, err
 } else {
  return &output.DBClusterParameterGroups[0], err
 }
}


// CreateParameterGroup creates a DB cluster parameter group that is based on the
 specified
// parameter group family.
func (clusters *DbClusters) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBClusterParameterGroup, error) {

 output, err := clusters.AuroraClient.CreateDBClusterParameterGroup(ctx,
  &rds.CreateDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   DBParameterGroupFamily:      aws.String(parameterGroupFamily),
   Description:                 aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
  return output.DBClusterParameterGroup, err
 }
}



// DeleteParameterGroup deletes the named DB cluster parameter group.
func (clusters *DbClusters) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := clusters.AuroraClient.DeleteDBClusterParameterGroup(ctx,
  &rds.DeleteDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
```

```
}



// GetParameters gets the parameters that are contained in a DB cluster parameter
 group.
func (clusters *DbClusters) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
 []types.Parameter, error) {

 var output *rds.DescribeDBClusterParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator :=
 rds.NewDescribeDBClusterParametersPaginator(clusters.AuroraClient,
  &rds.DescribeDBClusterParametersInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Source:                      aws.String(source),
  })
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get paramaeters for %v: %v\n", parameterGroupName, err)
   break
  } else {
   params = append(params, output.Parameters...)
  }
 }
 return params, err
}



// UpdateParameters updates parameters in a named DB cluster parameter group.
func (clusters *DbClusters) UpdateParameters(ctx context.Context,
 parameterGroupName string, params []types.Parameter) error {
 _, err := clusters.AuroraClient.ModifyDBClusterParameterGroup(ctx,
  &rds.ModifyDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Parameters:                  params,
  })
 if err != nil {
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
```

```
 } else {
  return nil
 }
}



// GetDbCluster gets data about an Aurora DB cluster.
func (clusters *DbClusters) GetDbCluster(ctx context.Context, clusterName string)
 (*types.DBCluster, error) {
 output, err := clusters.AuroraClient.DescribeDBClusters(ctx,
  &rds.DescribeDBClustersInput{
   DBClusterIdentifier: aws.String(clusterName),
  })
 if err != nil {
  var notFoundError *types.DBClusterNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB cluster %v does not exist.\n", clusterName)
   err = nil
  } else {
   log.Printf("Couldn't get DB cluster %v: %v\n", clusterName, err)
  }
  return nil, err
 } else {
  return &output.DBClusters[0], err
 }
}



// CreateDbCluster creates a DB cluster that is configured to use the specified
 parameter group.
// The newly created DB cluster contains a database that uses the specified
 engine and
// engine version.
func (clusters *DbClusters) CreateDbCluster(ctx context.Context, clusterName
 string, parameterGroupName string,
 dbName string, dbEngine string, dbEngineVersion string, adminName string,
 adminPassword string) (
 *types.DBCluster, error) {

 output, err := clusters.AuroraClient.CreateDBCluster(ctx,
 &rds.CreateDBClusterInput{
  DBClusterIdentifier:         aws.String(clusterName),
```

```
  Engine:                      aws.String(dbEngine),
  DBClusterParameterGroupName: aws.String(parameterGroupName),
  DatabaseName:                aws.String(dbName),
  EngineVersion:               aws.String(dbEngineVersion),
  MasterUserPassword:          aws.String(adminPassword),
  MasterUsername:              aws.String(adminName),
 })
 if err != nil {
  log.Printf("Couldn't create DB cluster %v: %v\n", clusterName, err)
  return nil, err
 } else {
  return output.DBCluster, err
 }
}



// DeleteDbCluster deletes a DB cluster without keeping a final snapshot.
func (clusters *DbClusters) DeleteDbCluster(ctx context.Context, clusterName
 string) error {
 _, err := clusters.AuroraClient.DeleteDBCluster(ctx, &rds.DeleteDBClusterInput{
  DBClusterIdentifier: aws.String(clusterName),
  SkipFinalSnapshot:   aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete DB cluster %v: %v\n", clusterName, err)
  return err
 } else {
  return nil
 }
}



// CreateClusterSnapshot creates a snapshot of a DB cluster.
func (clusters *DbClusters) CreateClusterSnapshot(ctx context.Context,
 clusterName string, snapshotName string) (
 *types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.CreateDBClusterSnapshot(ctx,
 &rds.CreateDBClusterSnapshotInput{
  DBClusterIdentifier:         aws.String(clusterName),
  DBClusterSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
```

```
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return output.DBClusterSnapshot, nil
 }
}



// GetClusterSnapshot gets a DB cluster snapshot.
func (clusters *DbClusters) GetClusterSnapshot(ctx context.Context, snapshotName
 string) (*types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterSnapshots(ctx,
  &rds.DescribeDBClusterSnapshotsInput{
   DBClusterSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBClusterSnapshots[0], nil
 }
}



// CreateInstanceInCluster creates a database instance in an existing DB cluster.
 The first database that is
// created defaults to a read-write DB instance.
func (clusters *DbClusters) CreateInstanceInCluster(ctx context.Context,
 clusterName string, instanceName string,
 dbEngine string, dbInstanceClass string) (*types.DBInstance, error) {
 output, err := clusters.AuroraClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBClusterIdentifier:  aws.String(clusterName),
  Engine:               aws.String(dbEngine),
  DBInstanceClass:      aws.String(dbInstanceClass),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
  return nil, err
 } else {
  return output.DBInstance, nil
```

```
 }
}



// GetInstance gets data about a DB instance.
func (clusters *DbClusters) GetInstance(ctx context.Context, instanceName string)
 (
 *types.DBInstance, error) {
 output, err := clusters.AuroraClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
 } else {
  return &output.DBInstances[0], nil
 }
}



// DeleteInstance deletes a DB instance.
func (clusters *DbClusters) DeleteInstance(ctx context.Context, instanceName
 string) error {
 _, err := clusters.AuroraClient.DeleteDBInstance(ctx,
 &rds.DeleteDBInstanceInput{
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
 }
```

```
}



// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (clusters *DbClusters) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := clusters.AuroraClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
// compatible with a set of specifications.
func (clusters *DbClusters) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {

 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instances []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(clusters.AuroraClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
   EngineVersion: aws.String(engineVersion),
  })
 for orderablePaginator.HasMorePages() {
  output, err = orderablePaginator.NextPage(ctx)
  if err != nil {
```

```
    log.Printf("Couldn't get orderable DB instances: %v\n", err)
    break
   } else {
    instances = append(instances, output.OrderableDBInstanceOptions...)
   }
  }
  return instances, err
}
```

- For API details, see the following topics in *Amazon SDK for Go API Reference*.
  - CreateDBCluster
  - CreateDBClusterParameterGroup
  - CreateDBClusterSnapshot
  - CreateDBInstance
  - DeleteDBCluster
  - DeleteDBClusterParameterGroup
  - DeleteDBInstance
  - DescribeDBClusterParameterGroups
  - DescribeDBClusterParameters
  - DescribeDBClusterSnapshots
  - DescribeDBClusters
  - DescribeDBEngineVersions
  - DescribeDBInstances
  - DescribeOrderableDBInstanceOptions
  - ModifyDBClusterParameterGroup

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-
started.html
 *
 * This example requires an AWS Secrets Manager secret that contains the
 * database credentials. If you do not create a
 * secret, this example will not work. For details, see:
 *
 * https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html
 *
 * This Java example performs the following tasks:
 *
 * 1. Gets available engine families for Amazon Aurora MySQL-Compatible Edition
 * by calling the DescribeDbEngineVersions(Engine='aurora-mysql') method.
 * 2. Selects an engine family and creates a custom DB cluster parameter group
 * by invoking the describeDBClusterParameters method.
 * 3. Gets the parameter groups by invoking the describeDBClusterParameterGroups
 * method.
 * 4. Gets parameters in the group by invoking the describeDBClusterParameters
 * method.
 * 5. Modifies the auto_increment_offset parameter by invoking the
 * modifyDbClusterParameterGroupRequest method.
 * 6. Gets and displays the updated parameters.
 * 7. Gets a list of allowed engine versions by invoking the
 * describeDbEngineVersions method.
 * 8. Creates an Aurora DB cluster database cluster that contains a MySQL
```

```
 * database.
 * 9. Waits for DB instance to be ready.
 * 10. Gets a list of instance classes available for the selected engine.
 * 11. Creates a database instance in the cluster.
 * 12. Waits for DB instance to be ready.
 * 13. Creates a snapshot.
 * 14. Waits for DB snapshot to be ready.
 * 15. Deletes the DB cluster.
 * 16. Deletes the DB cluster group.
 */
public class AuroraScenario {
    public static long sleepTime = 20;
    public static final String DASHES = new String(new char[80]).replace("\0",
 "-");

    public static void main(String[] args) throws InterruptedException {
        final String usage = "\n" +
                "Usage:\n" +
                "    <dbClusterGroupName> <dbParameterGroupFamily>
 <dbInstanceClusterIdentifier> <dbInstanceIdentifier> <dbName>
 <dbSnapshotIdentifier><secretName>"
                +
                "Where:\n" +
                "    dbClusterGroupName - The name of the DB cluster parameter
 group. \n" +
                "    dbParameterGroupFamily - The DB cluster parameter group
 family name (for example, aurora-mysql5.7). \n"
                +
                "    dbInstanceClusterIdentifier - The instance cluster
 identifier value.\n" +
                "    dbInstanceIdentifier - The database instance identifier.\n"
 +
                "    dbName - The database name.\n" +
                "    dbSnapshotIdentifier - The snapshot identifier.\n" +
                "    secretName - The name of the AWS Secrets Manager secret that
 contains the database credentials\"\n";
        ;

        if (args.length != 7) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbClusterGroupName = args[0];
```

```
        String dbParameterGroupFamily = args[1];
        String dbInstanceClusterIdentifier = args[2];
        String dbInstanceIdentifier = args[3];
        String dbName = args[4];
        String dbSnapshotIdentifier = args[5];
        String secretName = args[6];

        // Retrieve the database credentials using AWS Secrets Manager.
        Gson gson = new Gson();
        User user = gson.fromJson(String.valueOf(getSecretValues(secretName)),
User.class);
        String username = user.getUsername();
        String userPassword = user.getPassword();

        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon Aurora example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Return a list of the available DB engines");
        describeDBEngines(rdsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a custom parameter group");
        createDBClusterParameterGroup(rdsClient, dbClusterGroupName,
dbParameterGroupFamily);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Get the parameter group");
        describeDbClusterParameterGroups(rdsClient, dbClusterGroupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Get the parameters in the group");
        describeDbClusterParameters(rdsClient, dbClusterGroupName, 0);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("5. Modify the auto_increment_offset parameter");
        modifyDBClusterParas(rdsClient, dbClusterGroupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Display the updated parameter value");
        describeDbClusterParameters(rdsClient, dbClusterGroupName, -1);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Get a list of allowed engine versions");
        getAllowedEngines(rdsClient, dbParameterGroupFamily);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Create an Aurora DB cluster database");
        String arnClusterVal = createDBCluster(rdsClient, dbClusterGroupName,
dbName, dbInstanceClusterIdentifier,
                username, userPassword);
        System.out.println("The ARN of the cluster is " + arnClusterVal);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Wait for DB instance to be ready");
        waitForInstanceReady(rdsClient, dbInstanceClusterIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get a list of instance classes available for the
selected engine");
        String instanceClass = getListInstanceClasses(rdsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Create a database instance in the cluster.");
        String clusterDBARN = createDBInstanceCluster(rdsClient,
dbInstanceIdentifier, dbInstanceClusterIdentifier,
                instanceClass);
        System.out.println("The ARN of the database is " + clusterDBARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Wait for DB instance to be ready");
```

```
        waitDBInstanceReady(rdsClient, dbInstanceIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Create a snapshot");
        createDBClusterSnapshot(rdsClient, dbInstanceClusterIdentifier,
dbSnapshotIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Wait for DB snapshot to be ready");
        waitForSnapshotReady(rdsClient, dbSnapshotIdentifier,
dbInstanceClusterIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Delete the DB instance");
        deleteDatabaseInstance(rdsClient, dbInstanceIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("15. Delete the DB cluster");
        deleteCluster(rdsClient, dbInstanceClusterIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("16. Delete the DB cluster group");
        deleteDBClusterGroup(rdsClient, dbClusterGroupName, clusterDBARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The Scenario has successfully completed.");
        System.out.println(DASHES);
        rdsClient.close();
    }

    private static SecretsManagerClient getSecretClient() {
        Region region = Region.US_WEST_2;
        return SecretsManagerClient.builder()
                .region(region)

.credentialsProvider(EnvironmentVariableCredentialsProvider.create())
                .build();
    }
```

```
   private static String getSecretValues(String secretName) {
       SecretsManagerClient secretClient = getSecretClient();
       GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
               .secretId(secretName)
               .build();

       GetSecretValueResponse valueResponse =
secretClient.getSecretValue(valueRequest);
       return valueResponse.secretString();
   }

   public static void deleteDBClusterGroup(RdsClient rdsClient, String
dbClusterGroupName, String clusterDBARN)
           throws InterruptedException {
       try {
           boolean isDataDel = false;
           boolean didFind;
           String instanceARN;

           // Make sure that the database has been deleted.
           while (!isDataDel) {
               DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
               List<DBInstance> instanceList = response.dbInstances();
               int listSize = instanceList.size();
               didFind = false;
               int index = 1;
               for (DBInstance instance : instanceList) {
                   instanceARN = instance.dbInstanceArn();
                   if (instanceARN.compareTo(clusterDBARN) == 0) {
                       System.out.println(clusterDBARN + " still exists");
                       didFind = true;
                   }
                   if ((index == listSize) && (!didFind)) {
                       // Went through the entire list and did not find the
database ARN.
                       isDataDel = true;
                   }
                   Thread.sleep(sleepTime * 1000);
                   index++;
               }
           }
```

```
            DeleteDbClusterParameterGroupRequest clusterParameterGroupRequest =
DeleteDbClusterParameterGroupRequest
                    .builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .build();


rdsClient.deleteDBClusterParameterGroup(clusterParameterGroupRequest);
            System.out.println(dbClusterGroupName + " was deleted.");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void deleteCluster(RdsClient rdsClient, String
dbInstanceClusterIdentifier) {
        try {
            DeleteDbClusterRequest deleteDbClusterRequest =
DeleteDbClusterRequest.builder()
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .skipFinalSnapshot(true)
                    .build();

            rdsClient.deleteDBCluster(deleteDbClusterRequest);
            System.out.println(dbInstanceClusterIdentifier + " was deleted!");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void deleteDatabaseInstance(RdsClient rdsClient, String
dbInstanceIdentifier) {
        try {
            DeleteDbInstanceRequest deleteDbInstanceRequest =
DeleteDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .deleteAutomatedBackups(true)
                    .skipFinalSnapshot(true)
                    .build();
```

```
            DeleteDbInstanceResponse response =
rdsClient.deleteDBInstance(deleteDbInstanceRequest);
            System.out.println("The status of the database is " +
response.dbInstance().dbInstanceStatus());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void waitForSnapshotReady(RdsClient rdsClient, String
dbSnapshotIdentifier,
            String dbInstanceClusterIdentifier) {
        try {
            boolean snapshotReady = false;
            String snapshotReadyStr;
            System.out.println("Waiting for the snapshot to become available.");

            DescribeDbClusterSnapshotsRequest snapshotsRequest =
DescribeDbClusterSnapshotsRequest.builder()
                    .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .build();

            while (!snapshotReady) {
                DescribeDbClusterSnapshotsResponse response =
rdsClient.describeDBClusterSnapshots(snapshotsRequest);
                List<DBClusterSnapshot> snapshotList =
response.dbClusterSnapshots();
                for (DBClusterSnapshot snapshot : snapshotList) {
                    snapshotReadyStr = snapshot.status();
                    if (snapshotReadyStr.contains("available")) {
                        snapshotReady = true;
                    } else {
                        System.out.println(".");
                        Thread.sleep(sleepTime * 5000);
                    }
                }
            }

            System.out.println("The Snapshot is available!");

        } catch (RdsException | InterruptedException e) {
```

```
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void createDBClusterSnapshot(RdsClient rdsClient, String
dbInstanceClusterIdentifier,
            String dbSnapshotIdentifier) {
        try {
            CreateDbClusterSnapshotRequest snapshotRequest =
CreateDbClusterSnapshotRequest.builder()
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                    .build();

            CreateDbClusterSnapshotResponse response =
rdsClient.createDBClusterSnapshot(snapshotRequest);
            System.out.println("The Snapshot ARN is " +
response.dbClusterSnapshot().dbClusterSnapshotArn());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void waitDBInstanceReady(RdsClient rdsClient, String
dbInstanceIdentifier) {
        boolean instanceReady = false;
        String instanceReadyStr;
        System.out.println("Waiting for instance to become available.");
        try {
            DescribeDbInstancesRequest instanceRequest =
DescribeDbInstancesRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .build();

            String endpoint = "";
            while (!instanceReady) {
                DescribeDbInstancesResponse response =
rdsClient.describeDBInstances(instanceRequest);
                List<DBInstance> instanceList = response.dbInstances();
                for (DBInstance instance : instanceList) {
                    instanceReadyStr = instance.dbInstanceStatus();
```

```
                    if (instanceReadyStr.contains("available")) {
                        endpoint = instance.endpoint().address();
                        instanceReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database instance is available! The connection
endpoint is " + endpoint);

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static String createDBInstanceCluster(RdsClient rdsClient,
            String dbInstanceIdentifier,
            String dbInstanceClusterIdentifier,
            String instanceClass) {
        try {
            CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .engine("aurora-mysql")
                    .dbInstanceClass(instanceClass)
                    .build();

            CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
            System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());
            return response.dbInstance().dbInstanceArn();

        } catch (RdsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }
```

```
   public static String getListInstanceClasses(RdsClient rdsClient) {
       try {
           DescribeOrderableDbInstanceOptionsRequest optionsRequest =
DescribeOrderableDbInstanceOptionsRequest
                   .builder()
                   .engine("aurora-mysql")
                   .maxRecords(20)
                   .build();

           DescribeOrderableDbInstanceOptionsResponse response = rdsClient
                   .describeOrderableDBInstanceOptions(optionsRequest);
           List<OrderableDBInstanceOption> instanceOptions =
response.orderableDBInstanceOptions();
           String instanceClass = "";
           for (OrderableDBInstanceOption instanceOption : instanceOptions) {
               instanceClass = instanceOption.dbInstanceClass();
               System.out.println("The instance class is " +
instanceOption.dbInstanceClass());
               System.out.println("The engine version is " +
instanceOption.engineVersion());
           }
           return instanceClass;

       } catch (RdsException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
       return "";
   }

   // Waits until the database instance is available.
   public static void waitForInstanceReady(RdsClient rdsClient, String
dbClusterIdentifier) {
       boolean instanceReady = false;
       String instanceReadyStr;
       System.out.println("Waiting for instance to become available.");
       try {
           DescribeDbClustersRequest instanceRequest =
DescribeDbClustersRequest.builder()
                   .dbClusterIdentifier(dbClusterIdentifier)
                   .build();

           while (!instanceReady) {
```

```
                DescribeDbClustersResponse response =
rdsClient.describeDBClusters(instanceRequest);
                List<DBCluster> clusterList = response.dbClusters();
                for (DBCluster cluster : clusterList) {
                    instanceReadyStr = cluster.status();
                    if (instanceReadyStr.contains("available")) {
                        instanceReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database cluster is available!");

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static String createDBCluster(RdsClient rdsClient, String
dbParameterGroupFamily, String dbName,
            String dbClusterIdentifier, String userName, String password) {
        try {
            CreateDbClusterRequest clusterRequest =
CreateDbClusterRequest.builder()
                    .databaseName(dbName)
                    .dbClusterIdentifier(dbClusterIdentifier)
                    .dbClusterParameterGroupName(dbParameterGroupFamily)
                    .engine("aurora-mysql")
                    .masterUsername(userName)
                    .masterUserPassword(password)
                    .build();

            CreateDbClusterResponse response =
rdsClient.createDBCluster(clusterRequest);
            return response.dbCluster().dbClusterArn();

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
```

```
   }

   // Get a list of allowed engine versions.
   public static void getAllowedEngines(RdsClient rdsClient, String
dbParameterGroupFamily) {
       try {
           DescribeDbEngineVersionsRequest versionsRequest =
DescribeDbEngineVersionsRequest.builder()
                   .dbParameterGroupFamily(dbParameterGroupFamily)
                   .engine("aurora-mysql")
                   .build();

           DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(versionsRequest);
           List<DBEngineVersion> dbEngines = response.dbEngineVersions();
           for (DBEngineVersion dbEngine : dbEngines) {
               System.out.println("The engine version is " +
dbEngine.engineVersion());
               System.out.println("The engine description is " +
dbEngine.dbEngineDescription());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }

   // Modify the auto_increment_offset parameter.
   public static void modifyDBClusterParas(RdsClient rdsClient, String
dClusterGroupName) {
       try {
           Parameter parameter1 = Parameter.builder()
                   .parameterName("auto_increment_offset")
                   .applyMethod("immediate")
                   .parameterValue("5")
                   .build();

           List<Parameter> paraList = new ArrayList<>();
           paraList.add(parameter1);
           ModifyDbClusterParameterGroupRequest groupRequest =
ModifyDbClusterParameterGroupRequest.builder()
                   .dbClusterParameterGroupName(dClusterGroupName)
                   .parameters(paraList)
```

```
                    .build();

            ModifyDbClusterParameterGroupResponse response =
rdsClient.modifyDBClusterParameterGroup(groupRequest);
            System.out.println(
                    "The parameter group " +
response.dbClusterParameterGroupName() + " was successfully modified");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDbClusterParameters(RdsClient rdsClient, String
dbCLusterGroupName, int flag) {
        try {
            DescribeDbClusterParametersRequest dbParameterGroupsRequest;
            if (flag == 0) {
                dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                        .dbClusterParameterGroupName(dbCLusterGroupName)
                        .build();
            } else {
                dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                        .dbClusterParameterGroupName(dbCLusterGroupName)
                        .source("user")
                        .build();
            }

            DescribeDbClusterParametersResponse response = rdsClient
                    .describeDBClusterParameters(dbParameterGroupsRequest);
            List<Parameter> dbParameters = response.parameters();
            String paraName;
            for (Parameter para : dbParameters) {
                // Only print out information about either auto_increment_offset
or
                // auto_increment_increment.
                paraName = para.parameterName();
                if ((paraName.compareTo("auto_increment_offset") == 0)
                        || (paraName.compareTo("auto_increment_increment ") ==
0)) {
                    System.out.println("*** The parameter name is  " + paraName);
```

```
                    System.out.println("*** The parameter value is  " +
para.parameterValue());
                    System.out.println("*** The parameter data type is " +
para.dataType());
                    System.out.println("*** The parameter description is " +
para.description());
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDbClusterParameterGroups(RdsClient rdsClient,
String dbClusterGroupName) {
        try {
            DescribeDbClusterParameterGroupsRequest groupsRequest =
DescribeDbClusterParameterGroupsRequest.builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .maxRecords(20)
                    .build();

            List<DBClusterParameterGroup> groups =
rdsClient.describeDBClusterParameterGroups(groupsRequest)
                    .dbClusterParameterGroups();
            for (DBClusterParameterGroup group : groups) {
                System.out.println("The group name is " +
group.dbClusterParameterGroupName());
                System.out.println("The group ARN is " +
group.dbClusterParameterGroupArn());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void createDBClusterParameterGroup(RdsClient rdsClient, String
dbClusterGroupName,
```

```
            String dbParameterGroupFamily) {
        try {
            CreateDbClusterParameterGroupRequest groupRequest =
CreateDbClusterParameterGroupRequest.builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .dbParameterGroupFamily(dbParameterGroupFamily)
                    .description("Created by using the AWS SDK for Java")
                    .build();

            CreateDbClusterParameterGroupResponse response =
rdsClient.createDBClusterParameterGroup(groupRequest);
            System.out.println("The group name is " +
response.dbClusterParameterGroup().dbClusterParameterGroupName());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDBEngines(RdsClient rdsClient) {
        try {
            DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                    .engine("aurora-mysql")
                    .defaultOnly(true)
                    .maxRecords(20)
                    .build();

            DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
            List<DBEngineVersion> engines = response.dbEngineVersions();

            // Get all DBEngineVersion objects.
            for (DBEngineVersion engineOb : engines) {
                System.out.println("The name of the DB parameter group family for
the database engine is "
                        + engineOb.dbParameterGroupFamily());
                System.out.println("The name of the database engine " +
engineOb.engine());
                System.out.println("The version number of the database engine " +
engineOb.engineVersion());
            }
```

```
        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- For API details, see the following topics in *Amazon SDK for Java 2.x API Reference*.
  - CreateDBCluster
  - CreateDBClusterParameterGroup
  - CreateDBClusterSnapshot
  - CreateDBInstance
  - DeleteDBCluster
  - DeleteDBClusterParameterGroup
  - DeleteDBInstance
  - DescribeDBClusterParameterGroups
  - DescribeDBClusterParameters
  - DescribeDBClusterSnapshots
  - DescribeDBClusters
  - DescribeDBEngineVersions
  - DescribeDBInstances
  - DescribeOrderableDBInstanceOptions
  - ModifyDBClusterParameterGroup

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
/**
Before running this Kotlin code example, set up your development environment,
 including your credentials.

For more information, see the following documentation topic:

https://docs.aws.amazon.com/sdk-for-kotlin/latest/developer-guide/setup.html

This example requires an AWS Secrets Manager secret that contains the database
 credentials. If you do not create a
secret, this example will not work. For more details, see:

https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html

This Kotlin example performs the following tasks:

1. Returns a list of the available DB engines.
2. Creates a custom DB parameter group.
3. Gets the parameter groups.
4. Gets the parameters in the group.
5. Modifies the auto_increment_increment parameter.
6. Displays the updated parameter value.
7. Gets a list of allowed engine versions.
8. Creates an Aurora DB cluster database.
9. Waits for DB instance to be ready.
10. Gets a list of instance classes available for the selected engine.
11. Creates a database instance in the cluster.
12. Waits for the database instance in the cluster to be ready.
13. Creates a snapshot.
14. Waits for DB snapshot to be ready.
15. Deletes the DB instance.
16. Deletes the DB cluster.
17. Deletes the DB cluster group.
 */

var slTime: Long = 20

suspend fun main(args: Array<String>) {
    val usage = """
        Usage:
```

```
            <dbClusterGroupName> <dbParameterGroupFamily>
<dbInstanceClusterIdentifier> <dbName> <dbSnapshotIdentifier> <secretName>
        Where:
            dbClusterGroupName - The database group name.
            dbParameterGroupFamily - The database parameter group name.
            dbInstanceClusterIdentifier - The database instance identifier.
            dbName -  The database name.
            dbSnapshotIdentifier - The snapshot identifier.
            secretName - The name of the AWS Secrets Manager secret that contains
the database credentials.
    """

    if (args.size != 7) {
        println(usage)
        exitProcess(1)
    }

    val dbClusterGroupName = args[0]
    val dbParameterGroupFamily = args[1]
    val dbInstanceClusterIdentifier = args[2]
    val dbInstanceIdentifier = args[3]
    val dbName = args[4]
    val dbSnapshotIdentifier = args[5]
    val secretName = args[6]

    val gson = Gson()
    val user = gson.fromJson(getSecretValues(secretName).toString(),
User::class.java)
    val username = user.username
    val userPassword = user.password

    println("1. Return a list of the available DB engines")
    describeAuroraDBEngines()

    println("2. Create a custom parameter group")
    createDBClusterParameterGroup(dbClusterGroupName, dbParameterGroupFamily)

    println("3. Get the parameter group")
    describeDbClusterParameterGroups(dbClusterGroupName)

    println("4. Get the parameters in the group")
    describeDbClusterParameters(dbClusterGroupName, 0)

    println("5. Modify the auto_increment_offset parameter")
```

```
    modifyDBClusterParas(dbClusterGroupName)

    println("6. Display the updated parameter value")
    describeDbClusterParameters(dbClusterGroupName, -1)

    println("7. Get a list of allowed engine versions")
    getAllowedClusterEngines(dbParameterGroupFamily)

    println("8. Create an Aurora DB cluster database")
    val arnClusterVal = createDBCluster(dbClusterGroupName, dbName,
dbInstanceClusterIdentifier, username, userPassword)
    println("The ARN of the cluster is $arnClusterVal")

    println("9. Wait for DB instance to be ready")
    waitForClusterInstanceReady(dbInstanceClusterIdentifier)

    println("10. Get a list of instance classes available for the selected
engine")
    val instanceClass = getListInstanceClasses()

    println("11. Create a database instance in the cluster.")
    val clusterDBARN = createDBInstanceCluster(dbInstanceIdentifier,
dbInstanceClusterIdentifier, instanceClass)
    println("The ARN of the database is $clusterDBARN")

    println("12. Wait for DB instance to be ready")
    waitDBAuroraInstanceReady(dbInstanceIdentifier)

    println("13. Create a snapshot")
    createDBClusterSnapshot(dbInstanceClusterIdentifier, dbSnapshotIdentifier)

    println("14. Wait for DB snapshot to be ready")
    waitSnapshotReady(dbSnapshotIdentifier, dbInstanceClusterIdentifier)

    println("15. Delete the DB instance")
    deleteDBInstance(dbInstanceIdentifier)

    println("16. Delete the DB cluster")
    deleteCluster(dbInstanceClusterIdentifier)

    println("17. Delete the DB cluster group")
    if (clusterDBARN != null) {
        deleteDBClusterGroup(dbClusterGroupName, clusterDBARN)
    }
```

```
    println("The Scenario has successfully completed.")
}

@Throws(InterruptedException::class)
suspend fun deleteDBClusterGroup(
    dbClusterGroupName: String,
    clusterDBARN: String,
) {
    var isDataDel = false
    var didFind: Boolean
    var instanceARN: String

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        // Make sure that the database has been deleted.
        while (!isDataDel) {
            val response = rdsClient.describeDbInstances()
            val instanceList = response.dbInstances
            val listSize = instanceList?.size
            isDataDel = false
            didFind = false
            var index = 1
            if (instanceList != null) {
                for (instance in instanceList) {
                    instanceARN = instance.dbInstanceArn.toString()
                    if (instanceARN.compareTo(clusterDBARN) == 0) {
                        println("$clusterDBARN still exists")
                        didFind = true
                    }
                    if (index == listSize && !didFind) {
                        // Went through the entire list and did not find the
 database ARN.
                        isDataDel = true
                    }
                    delay(slTime * 1000)
                    index++
                }
            }
        }
        val clusterParameterGroupRequest =
            DeleteDbClusterParameterGroupRequest {
                dbClusterParameterGroupName = dbClusterGroupName
            }

        rdsClient.deleteDbClusterParameterGroup(clusterParameterGroupRequest)
```

```
        println("$dbClusterGroupName was deleted.")
    }
}

suspend fun deleteCluster(dbInstanceClusterIdentifier: String) {
    val deleteDbClusterRequest =
        DeleteDbClusterRequest {
            dbClusterIdentifier = dbInstanceClusterIdentifier
            skipFinalSnapshot = true
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        rdsClient.deleteDbCluster(deleteDbClusterRequest)
        println("$dbInstanceClusterIdentifier was deleted!")
    }
}

suspend fun deleteDBInstance(dbInstanceIdentifierVal: String) {
    val deleteDbInstanceRequest =
        DeleteDbInstanceRequest {
            dbInstanceIdentifier = dbInstanceIdentifierVal
            deleteAutomatedBackups = true
            skipFinalSnapshot = true
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.deleteDbInstance(deleteDbInstanceRequest)
        print("The status of the database is
 ${response.dbInstance?.dbInstanceStatus}")
    }
}

suspend fun waitSnapshotReady(
    dbSnapshotIdentifier: String?,
    dbInstanceClusterIdentifier: String?,
) {
    var snapshotReady = false
    var snapshotReadyStr: String
    println("Waiting for the snapshot to become available.")

    val snapshotsRequest =
        DescribeDbClusterSnapshotsRequest {
            dbClusterSnapshotIdentifier = dbSnapshotIdentifier
            dbClusterIdentifier = dbInstanceClusterIdentifier
```

```
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        while (!snapshotReady) {
            val response = rdsClient.describeDbClusterSnapshots(snapshotsRequest)
            val snapshotList = response.dbClusterSnapshots
            if (snapshotList != null) {
                for (snapshot in snapshotList) {
                    snapshotReadyStr = snapshot.status.toString()
                    if (snapshotReadyStr.contains("available")) {
                        snapshotReady = true
                    } else {
                        println(".")
                        delay(slTime * 5000)
                    }
                }
            }
        }
    }
    println("The Snapshot is available!")
}

suspend fun createDBClusterSnapshot(
    dbInstanceClusterIdentifier: String?,
    dbSnapshotIdentifier: String?,
) {
    val snapshotRequest =
        CreateDbClusterSnapshotRequest {
            dbClusterIdentifier = dbInstanceClusterIdentifier
            dbClusterSnapshotIdentifier = dbSnapshotIdentifier
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.createDbClusterSnapshot(snapshotRequest)
        println("The Snapshot ARN is
 ${response.dbClusterSnapshot?.dbClusterSnapshotArn}")
    }
}

suspend fun waitDBAuroraInstanceReady(dbInstanceIdentifierVal: String?) {
    var instanceReady = false
    var instanceReadyStr: String
    println("Waiting for instance to become available.")
    val instanceRequest =
```

```
        DescribeDbInstancesRequest {
            dbInstanceIdentifier = dbInstanceIdentifierVal
        }

    var endpoint = ""
    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        while (!instanceReady) {
            val response = rdsClient.describeDbInstances(instanceRequest)
            response.dbInstances?.forEach { instance ->
                instanceReadyStr = instance.dbInstanceStatus.toString()
                if (instanceReadyStr.contains("available")) {
                    endpoint = instance.endpoint?.address.toString()
                    instanceReady = true
                } else {
                    print(".")
                    delay(sleepTime * 1000)
                }
            }
        }
    }
    println("Database instance is available! The connection endpoint is
 $endpoint")
}

suspend fun createDBInstanceCluster(
    dbInstanceIdentifierVal: String?,
    dbInstanceClusterIdentifierVal: String?,
    instanceClassVal: String?,
): String? {
    val instanceRequest =
        CreateDbInstanceRequest {
            dbInstanceIdentifier = dbInstanceIdentifierVal
            dbClusterIdentifier = dbInstanceClusterIdentifierVal
            engine = "aurora-mysql"
            dbInstanceClass = instanceClassVal
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.createDbInstance(instanceRequest)
        print("The status is ${response.dbInstance?.dbInstanceStatus}")
        return response.dbInstance?.dbInstanceArn
    }
}
```

```
suspend fun getListInstanceClasses(): String {
    val optionsRequest =
        DescribeOrderableDbInstanceOptionsRequest {
            engine = "aurora-mysql"
            maxRecords = 20
        }
    var instanceClass = ""
    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response =
 rdsClient.describeOrderableDbInstanceOptions(optionsRequest)
        response.orderableDbInstanceOptions?.forEach { instanceOption ->
            instanceClass = instanceOption.dbInstanceClass.toString()
            println("The instance class is ${instanceOption.dbInstanceClass}")
            println("The engine version is ${instanceOption.engineVersion}")
        }
    }
    return instanceClass
}

// Waits until the database instance is available.
suspend fun waitForClusterInstanceReady(dbClusterIdentifierVal: String?) {
    var instanceReady = false
    var instanceReadyStr: String
    println("Waiting for instance to become available.")

    val instanceRequest =
        DescribeDbClustersRequest {
            dbClusterIdentifier = dbClusterIdentifierVal
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        while (!instanceReady) {
            val response = rdsClient.describeDbClusters(instanceRequest)
            response.dbClusters?.forEach { cluster ->
                instanceReadyStr = cluster.status.toString()
                if (instanceReadyStr.contains("available")) {
                    instanceReady = true
                } else {
                    print(".")
                    delay(sleepTime * 1000)
                }
            }
        }
    }
```

```
    println("Database cluster is available!")
}

suspend fun createDBCluster(
    dbParameterGroupFamilyVal: String?,
    dbName: String?,
    dbClusterIdentifierVal: String?,
    userName: String?,
    password: String?,
): String? {
    val clusterRequest =
        CreateDbClusterRequest {
            databaseName = dbName
            dbClusterIdentifier = dbClusterIdentifierVal
            dbClusterParameterGroupName = dbParameterGroupFamilyVal
            engine = "aurora-mysql"
            masterUsername = userName
            masterUserPassword = password
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.createDbCluster(clusterRequest)
        return response.dbCluster?.dbClusterArn
    }
}

// Get a list of allowed engine versions.
suspend fun getAllowedClusterEngines(dbParameterGroupFamilyVal: String?) {
    val versionsRequest =
        DescribeDbEngineVersionsRequest {
            dbParameterGroupFamily = dbParameterGroupFamilyVal
            engine = "aurora-mysql"
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.describeDbEngineVersions(versionsRequest)
        response.dbEngineVersions?.forEach { dbEngine ->
            println("The engine version is ${dbEngine.engineVersion}")
            println("The engine description is ${dbEngine.dbEngineDescription}")
        }
    }
}

// Modify the auto_increment_offset parameter.
```

```
suspend fun modifyDBClusterParas(dClusterGroupName: String?) {
    val parameter1 =
        Parameter {
            parameterName = "auto_increment_offset"
            applyMethod = ApplyMethod.fromValue("immediate")
            parameterValue = "5"
        }

    val paraList = ArrayList<Parameter>()
    paraList.add(parameter1)
    val groupRequest =
        ModifyDbClusterParameterGroupRequest {
            dbClusterParameterGroupName = dClusterGroupName
            parameters = paraList
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.modifyDbClusterParameterGroup(groupRequest)
        println("The parameter group ${response.dbClusterParameterGroupName} was
 successfully modified")
    }
}

suspend fun describeDbClusterParameters(
    dbCLusterGroupName: String?,
    flag: Int,
) {
    val dbParameterGroupsRequest: DescribeDbClusterParametersRequest
    dbParameterGroupsRequest =
        if (flag == 0) {
            DescribeDbClusterParametersRequest {
                dbClusterParameterGroupName = dbCLusterGroupName
            }
        } else {
            DescribeDbClusterParametersRequest {
                dbClusterParameterGroupName = dbCLusterGroupName
                source = "user"
            }
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response =
 rdsClient.describeDbClusterParameters(dbParameterGroupsRequest)
        response.parameters?.forEach { para ->
```

```
            // Only print out information about either auto_increment_offset or
 auto_increment_increment.
            val paraName = para.parameterName
            if (paraName != null) {
                if (paraName.compareTo("auto_increment_offset") == 0 ||
 paraName.compareTo("auto_increment_increment ") == 0) {
                    println("*** The parameter name is  $paraName")
                    println("*** The parameter value is  ${para.parameterValue}")
                    println("*** The parameter data type is ${para.dataType}")
                    println("*** The parameter description is
 ${para.description}")
                    println("*** The parameter allowed values  is
 ${para.allowedValues}")
                }
            }
        }
    }
}

suspend fun describeDbClusterParameterGroups(dbClusterGroupName: String?) {
    val groupsRequest =
        DescribeDbClusterParameterGroupsRequest {
            dbClusterParameterGroupName = dbClusterGroupName
            maxRecords = 20
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.describeDbClusterParameterGroups(groupsRequest)
        response.dbClusterParameterGroups?.forEach { group ->
            println("The group name is ${group.dbClusterParameterGroupName}")
            println("The group ARN is ${group.dbClusterParameterGroupArn}")
        }
    }
}

suspend fun createDBClusterParameterGroup(
    dbClusterGroupNameVal: String?,
    dbParameterGroupFamilyVal: String?,
) {
    val groupRequest =
        CreateDbClusterParameterGroupRequest {
            dbClusterParameterGroupName = dbClusterGroupNameVal
            dbParameterGroupFamily = dbParameterGroupFamilyVal
            description = "Created by using the AWS SDK for Kotlin"
```

```
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.createDbClusterParameterGroup(groupRequest)
        println("The group name is
 ${response.dbClusterParameterGroup?.dbClusterParameterGroupName}")
    }
}

suspend fun describeAuroraDBEngines() {
    val engineVersionsRequest =
        DescribeDbEngineVersionsRequest {
            engine = "aurora-mysql"
            defaultOnly = true
            maxRecords = 20
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.describeDbEngineVersions(engineVersionsRequest)
        response.dbEngineVersions?.forEach { engineOb ->
            println("The name of the DB parameter group family for the database
 engine is ${engineOb.dbParameterGroupFamily}")
            println("The name of the database engine ${engineOb.engine}")
            println("The version number of the database engine
 ${engineOb.engineVersion}")
        }
    }
}
```

- For API details, see the following topics in *Amazon SDK for Kotlin API reference*.
  - CreateDBCluster
  - CreateDBClusterParameterGroup
  - CreateDBClusterSnapshot
  - CreateDBInstance
  - DeleteDBCluster
  - DeleteDBClusterParameterGroup
  - DeleteDBInstance
  - DescribeDBClusterParameterGroups

- DescribeDBClusterParameters
- DescribeDBClusterSnapshots
- DescribeDBClusters
- DescribeDBEngineVersions
- DescribeDBInstances
- DescribeOrderableDBInstanceOptions
- ModifyDBClusterParameterGroup

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

Run an interactive scenario at a command prompt.

```
class AuroraClusterScenario:
    """Runs a scenario that shows how to get started using Aurora DB clusters."""

    def __init__(self, aurora_wrapper):
        """
        :param aurora_wrapper: An object that wraps Aurora DB cluster actions.
        """
        self.aurora_wrapper = aurora_wrapper

    def create_parameter_group(self, db_engine, parameter_group_name):
        """
        Shows how to get available engine versions for a specified database
 engine and
        create a DB cluster parameter group that is compatible with a selected
 engine family.

        :param db_engine: The database engine to use as a basis.
        :param parameter_group_name: The name given to the newly created
 parameter group.
```

```
        :return: The newly created parameter group.
        """
        print(
            f"Checking for an existing DB cluster parameter group named
{parameter_group_name}."
        )
        parameter_group =
self.aurora_wrapper.get_parameter_group(parameter_group_name)
        if parameter_group is None:
            print(f"Getting available database engine versions for {db_engine}.")
            engine_versions = self.aurora_wrapper.get_engine_versions(db_engine)
            families = list({ver["DBParameterGroupFamily"] for ver in
engine_versions})
            family_index = q.choose("Which family do you want to use? ",
families)
            print(f"Creating a DB cluster parameter group.")
            self.aurora_wrapper.create_parameter_group(
                parameter_group_name, families[family_index], "Example parameter
group."
            )
            parameter_group = self.aurora_wrapper.get_parameter_group(
                parameter_group_name
            )
        print(f"Parameter group
{parameter_group['DBClusterParameterGroupName']}:")
        pp(parameter_group)
        print("-" * 88)
        return parameter_group

    def set_user_parameters(self, parameter_group_name):
        """
        Shows how to get the parameters contained in a custom parameter group and
        update some of the parameter values in the group.

        :param parameter_group_name: The name of the parameter group to query and
modify.
        """
        print("Let's set some parameter values in your parameter group.")
        auto_inc_parameters = self.aurora_wrapper.get_parameters(
            parameter_group_name, name_prefix="auto_increment"
        )
        update_params = []
        for auto_inc in auto_inc_parameters:
            if auto_inc["IsModifiable"] and auto_inc["DataType"] == "integer":
```

```
                print(f"The {auto_inc['ParameterName']} parameter is described
as:")
                print(f"\t{auto_inc['Description']}")
                param_range = auto_inc["AllowedValues"].split("-")
                auto_inc["ParameterValue"] = str(
                    q.ask(
                        f"Enter a value between {param_range[0]} and
{param_range[1]}: ",
                        q.is_int,
                        q.in_range(int(param_range[0]), int(param_range[1])),
                    )
                )
                update_params.append(auto_inc)
        self.aurora_wrapper.update_parameters(parameter_group_name,
update_params)
        print(
            "You can get a list of parameters you've set by specifying a source
of 'user'."
        )
        user_parameters = self.aurora_wrapper.get_parameters(
            parameter_group_name, source="user"
        )
        pp(user_parameters)
        print("-" * 88)

    def create_cluster(self, cluster_name, db_engine, db_name, parameter_group):
        """
        Shows how to create an Aurora DB cluster that contains a database of a
specified
        type. The database is also configured to use a custom DB cluster
parameter group.

        :param cluster_name: The name given to the newly created DB cluster.
        :param db_engine: The engine of the created database.
        :param db_name: The name given to the created database.
        :param parameter_group: The parameter group that is associated with the
DB cluster.
        :return: The newly created DB cluster.
        """
        print("Checking for an existing DB cluster.")
        cluster = self.aurora_wrapper.get_db_cluster(cluster_name)
        if cluster is None:
            admin_username = q.ask(
```

```
                "Enter an administrator user name for the database: ",
q.non_empty
            )
            admin_password = q.ask(
                "Enter a password for the administrator (at least 8 characters):
",
                q.non_empty,
            )
            engine_versions = self.aurora_wrapper.get_engine_versions(
                db_engine, parameter_group["DBParameterGroupFamily"]
            )
            engine_choices = [
                ver["EngineVersionDescription"] for ver in engine_versions
            ]
            print("The available engines for your parameter group are:")
            engine_index = q.choose("Which engine do you want to use? ",
engine_choices)
            print(
                f"Creating DB cluster {cluster_name} and database {db_name}.\n"
                f"The DB cluster is configured to use\n"
                f"your custom parameter group
{parameter_group['DBClusterParameterGroupName']}\n"
                f"and selected engine {engine_choices[engine_index]}.\n"
                f"This typically takes several minutes."
            )
            cluster = self.aurora_wrapper.create_db_cluster(
                cluster_name,
                parameter_group["DBClusterParameterGroupName"],
                db_name,
                db_engine,
                engine_versions[engine_index]["EngineVersion"],
                admin_username,
                admin_password,
            )
            while cluster.get("Status") != "available":
                wait(30)
                cluster = self.aurora_wrapper.get_db_cluster(cluster_name)
            print("Cluster created and available.\n")
        print("Cluster data:")
        pp(cluster)
        print("-" * 88)
        return cluster

    def create_instance(self, cluster):
```

```
        """
        Shows how to create a DB instance in an existing Aurora DB cluster. A new
DB cluster
        contains no DB instances, so you must add one. The first DB instance that
is added
        to a DB cluster defaults to a read-write DB instance.

        :param cluster: The DB cluster where the DB instance is added.
        :return: The newly created DB instance.
        """
        print("Checking for an existing database instance.")
        cluster_name = cluster["DBClusterIdentifier"]
        db_inst = self.aurora_wrapper.get_db_instance(cluster_name)
        if db_inst is None:
            print("Let's create a database instance in your DB cluster.")
            print("First, choose a DB instance type:")
            inst_opts = self.aurora_wrapper.get_orderable_instances(
                cluster["Engine"], cluster["EngineVersion"]
            )
            inst_choices = list(
                {
                    opt["DBInstanceClass"] + ", storage type: " +
opt["StorageType"]
                    for opt in inst_opts
                }
            )
            inst_index = q.choose(
                "Which DB instance class do you want to use? ", inst_choices
            )
            print(
                f"Creating a database instance. This typically takes several
minutes."
            )
            db_inst = self.aurora_wrapper.create_instance_in_cluster(
                cluster_name,
                cluster_name,
                cluster["Engine"],
                inst_opts[inst_index]["DBInstanceClass"],
            )
            while db_inst.get("DBInstanceStatus") != "available":
                wait(30)
                db_inst = self.aurora_wrapper.get_db_instance(cluster_name)
        print("Instance data:")
        pp(db_inst)
```

```
        print("-" * 88)
        return db_inst

    @staticmethod
    def display_connection(cluster):
        """
        Displays connection information about an Aurora DB cluster and tips on
 how to
        connect to it.

        :param cluster: The DB cluster to display.
        """
        print(
            "You can now connect to your database using your favorite MySql
 client.\n"
            "One way to connect is by using the 'mysql' shell on an Amazon EC2
 instance\n"
            "that is running in the same VPC as your database cluster. Pass the
 endpoint,\n"
            "port, and administrator user name to 'mysql' and enter your password
\n"
            "when prompted:\n"
        )
        print(
            f"\n\tmysql -h {cluster['Endpoint']} -P {cluster['Port']} -u
 {cluster['MasterUsername']} -p\n"
        )
        print(
            "For more information, see the User Guide for Aurora:\n"
            "\thttps://docs.aws.amazon.com/AmazonRDS/latest/AuroraUserGuide/
CHAP_GettingStartedAurora.CreatingConnecting.Aurora.html#CHAP_GettingStartedAurora.Aurora
        )
        print("-" * 88)

    def create_snapshot(self, cluster_name):
        """
        Shows how to create a DB cluster snapshot and wait until it's available.

        :param cluster_name: The name of a DB cluster to snapshot.
        """
        if q.ask(
            "Do you want to create a snapshot of your DB cluster (y/n)? ",
 q.is_yesno
        ):
```

```
            snapshot_id = f"{cluster_name}-{uuid.uuid4()}"
            print(
                f"Creating a snapshot named {snapshot_id}. This typically takes a
few minutes."
            )
            snapshot = self.aurora_wrapper.create_cluster_snapshot(
                snapshot_id, cluster_name
            )
            while snapshot.get("Status") != "available":
                wait(30)
                snapshot = self.aurora_wrapper.get_cluster_snapshot(snapshot_id)
            pp(snapshot)
            print("-" * 88)

    def cleanup(self, db_inst, cluster, parameter_group):
        """
        Shows how to clean up a DB instance, DB cluster, and DB cluster parameter
group.
        Before the DB cluster parameter group can be deleted, all associated DB
instances and
        DB clusters must first be deleted.

        :param db_inst: The DB instance to delete.
        :param cluster: The DB cluster to delete.
        :param parameter_group: The DB cluster parameter group to delete.
        """
        cluster_name = cluster["DBClusterIdentifier"]
        parameter_group_name = parameter_group["DBClusterParameterGroupName"]
        if q.ask(
            "\nDo you want to delete the database instance, DB cluster, and
parameter "
            "group (y/n)? ",
            q.is_yesno,
        ):
            print(f"Deleting database instance
{db_inst['DBInstanceIdentifier']}.")

self.aurora_wrapper.delete_db_instance(db_inst["DBInstanceIdentifier"])
            print(f"Deleting database cluster {cluster_name}.")
            self.aurora_wrapper.delete_db_cluster(cluster_name)
            print(
                "Waiting for the DB instance and DB cluster to delete.\n"
                "This typically takes several minutes."
            )
```

```
            while db_inst is not None or cluster is not None:
                wait(30)
                if db_inst is not None:
                    db_inst = self.aurora_wrapper.get_db_instance(
                        db_inst["DBInstanceIdentifier"]
                    )
                if cluster is not None:
                    cluster = self.aurora_wrapper.get_db_cluster(
                        cluster["DBClusterIdentifier"]
                    )
            print(f"Deleting parameter group {parameter_group_name}.")
            self.aurora_wrapper.delete_parameter_group(parameter_group_name)

    def run_scenario(self, db_engine, parameter_group_name, cluster_name,
db_name):
        print("-" * 88)
        print(
            "Welcome to the Amazon Relational Database Service (Amazon RDS) get
started\n"
            "with Aurora DB clusters demo."
        )
        print("-" * 88)

        parameter_group = self.create_parameter_group(db_engine,
parameter_group_name)
        self.set_user_parameters(parameter_group_name)
        cluster = self.create_cluster(cluster_name, db_engine, db_name,
parameter_group)
        wait(5)
        db_inst = self.create_instance(cluster)
        self.display_connection(cluster)
        self.create_snapshot(cluster_name)
        self.cleanup(db_inst, cluster, parameter_group)

        print("\nThanks for watching!")
        print("-" * 88)


if __name__ == "__main__":
    logging.basicConfig(level=logging.INFO, format="%(levelname)s: %(message)s")
    try:
        scenario = AuroraClusterScenario(AuroraWrapper.from_client())
        scenario.run_scenario(
            "aurora-mysql",
```

```
            "doc-example-cluster-parameter-group",
            "doc-example-aurora",
            "docexampledb",
        )
    except Exception:
        logging.exception("Something went wrong with the demo.")
```

Define functions that are called by the scenario to manage Aurora actions.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def get_parameter_group(self, parameter_group_name):
        """
        Gets a DB cluster parameter group.

        :param parameter_group_name: The name of the parameter group to retrieve.
        :return: The requested parameter group.
        """
        try:
            response = self.rds_client.describe_db_cluster_parameter_groups(
                DBClusterParameterGroupName=parameter_group_name
            )
            parameter_group = response["DBClusterParameterGroups"][0]
        except ClientError as err:
            if err.response["Error"]["Code"] == "DBParameterGroupNotFound":
```

```
                logger.info("Parameter group %s does not exist.",
parameter_group_name)
            else:
                logger.error(
                    "Couldn't get parameter group %s. Here's why: %s: %s",
                    parameter_group_name,
                    err.response["Error"]["Code"],
                    err.response["Error"]["Message"],
                )
                raise
        else:
            return parameter_group


    def create_parameter_group(
        self, parameter_group_name, parameter_group_family, description
    ):
        """
        Creates a DB cluster parameter group that is based on the specified
parameter group
        family.

        :param parameter_group_name: The name of the newly created parameter
group.
        :param parameter_group_family: The family that is used as the basis of
the new
                                       parameter group.
        :param description: A description given to the parameter group.
        :return: Data about the newly created parameter group.
        """
        try:
            response = self.rds_client.create_db_cluster_parameter_group(
                DBClusterParameterGroupName=parameter_group_name,
                DBParameterGroupFamily=parameter_group_family,
                Description=description,
            )
        except ClientError as err:
            logger.error(
                "Couldn't create parameter group %s. Here's why: %s: %s",
                parameter_group_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
```

```
        else:
            return response


    def delete_parameter_group(self, parameter_group_name):
        """
        Deletes a DB cluster parameter group.

        :param parameter_group_name: The name of the parameter group to delete.
        :return: Data about the parameter group.
        """
        try:
            response = self.rds_client.delete_db_cluster_parameter_group(
                DBClusterParameterGroupName=parameter_group_name
            )
        except ClientError as err:
            logger.error(
                "Couldn't delete parameter group %s. Here's why: %s: %s",
                parameter_group_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return response


    def get_parameters(self, parameter_group_name, name_prefix="", source=None):
        """
        Gets the parameters that are contained in a DB cluster parameter group.

        :param parameter_group_name: The name of the parameter group to query.
        :param name_prefix: When specified, the retrieved list of parameters is
filtered
                            to contain only parameters that start with this
prefix.
        :param source: When specified, only parameters from this source are
retrieved.
                       For example, a source of 'user' retrieves only parameters
that
                       were set by a user.
        :return: The list of requested parameters.
        """
        try:
```

```
            kwargs = {"DBClusterParameterGroupName": parameter_group_name}
            if source is not None:
                kwargs["Source"] = source
            parameters = []
            paginator =
self.rds_client.get_paginator("describe_db_cluster_parameters")
            for page in paginator.paginate(**kwargs):
                parameters += [
                    p
                    for p in page["Parameters"]
                    if p["ParameterName"].startswith(name_prefix)
                ]
        except ClientError as err:
            logger.error(
                "Couldn't get parameters for %s. Here's why: %s: %s",
                parameter_group_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return parameters


    def update_parameters(self, parameter_group_name, update_parameters):
        """
        Updates parameters in a custom DB cluster parameter group.

        :param parameter_group_name: The name of the parameter group to update.
        :param update_parameters: The parameters to update in the group.
        :return: Data about the modified parameter group.
        """
        try:
            response = self.rds_client.modify_db_cluster_parameter_group(
                DBClusterParameterGroupName=parameter_group_name,
                Parameters=update_parameters,
            )
        except ClientError as err:
            logger.error(
                "Couldn't update parameters in %s. Here's why: %s: %s",
                parameter_group_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
```

```
            raise
        else:
            return response


    def get_db_cluster(self, cluster_name):
        """
        Gets data about an Aurora DB cluster.

        :param cluster_name: The name of the DB cluster to retrieve.
        :return: The retrieved DB cluster.
        """
        try:
            response = self.rds_client.describe_db_clusters(
                DBClusterIdentifier=cluster_name
            )
            cluster = response["DBClusters"][0]
        except ClientError as err:
            if err.response["Error"]["Code"] == "DBClusterNotFoundFault":
                logger.info("Cluster %s does not exist.", cluster_name)
            else:
                logger.error(
                    "Couldn't verify the existence of DB cluster %s. Here's why:
%s: %s",
                    cluster_name,
                    err.response["Error"]["Code"],
                    err.response["Error"]["Message"],
                )
                raise
        else:
            return cluster


    def create_db_cluster(
        self,
        cluster_name,
        parameter_group_name,
        db_name,
        db_engine,
        db_engine_version,
        admin_name,
        admin_password,
    ):
        """
```

```
        Creates a DB cluster that is configured to use the specified parameter
group.
        The newly created DB cluster contains a database that uses the specified
engine and
        engine version.

        :param cluster_name: The name of the DB cluster to create.
        :param parameter_group_name: The name of the parameter group to associate
with
                                     the DB cluster.
        :param db_name: The name of the database to create.
        :param db_engine: The database engine of the database that is created,
such as MySql.
        :param db_engine_version: The version of the database engine.
        :param admin_name: The user name of the database administrator.
        :param admin_password: The password of the database administrator.
        :return: The newly created DB cluster.
        """
        try:
            response = self.rds_client.create_db_cluster(
                DatabaseName=db_name,
                DBClusterIdentifier=cluster_name,
                DBClusterParameterGroupName=parameter_group_name,
                Engine=db_engine,
                EngineVersion=db_engine_version,
                MasterUsername=admin_name,
                MasterUserPassword=admin_password,
            )
            cluster = response["DBCluster"]
        except ClientError as err:
            logger.error(
                "Couldn't create database %s. Here's why: %s: %s",
                db_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return cluster


    def delete_db_cluster(self, cluster_name):
        """
        Deletes a DB cluster.
```

```
        :param cluster_name: The name of the DB cluster to delete.
        """
        try:
            self.rds_client.delete_db_cluster(
                DBClusterIdentifier=cluster_name, SkipFinalSnapshot=True
            )
            logger.info("Deleted DB cluster %s.", cluster_name)
        except ClientError:
            logger.exception("Couldn't delete DB cluster %s.", cluster_name)
            raise


    def create_cluster_snapshot(self, snapshot_id, cluster_id):
        """
        Creates a snapshot of a DB cluster.

        :param snapshot_id: The ID to give the created snapshot.
        :param cluster_id: The DB cluster to snapshot.
        :return: Data about the newly created snapshot.
        """
        try:
            response = self.rds_client.create_db_cluster_snapshot(
                DBClusterSnapshotIdentifier=snapshot_id,
DBClusterIdentifier=cluster_id
            )
            snapshot = response["DBClusterSnapshot"]
        except ClientError as err:
            logger.error(
                "Couldn't create snapshot of %s. Here's why: %s: %s",
                cluster_id,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return snapshot


    def get_cluster_snapshot(self, snapshot_id):
        """
        Gets a DB cluster snapshot.

        :param snapshot_id: The ID of the snapshot to retrieve.
```

```
        :return: The retrieved snapshot.
        """
        try:
            response = self.rds_client.describe_db_cluster_snapshots(
                DBClusterSnapshotIdentifier=snapshot_id
            )
            snapshot = response["DBClusterSnapshots"][0]
        except ClientError as err:
            logger.error(
                "Couldn't get DB cluster snapshot %s. Here's why: %s: %s",
                snapshot_id,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return snapshot


    def create_instance_in_cluster(
        self, instance_id, cluster_id, db_engine, instance_class
    ):
        """
        Creates a database instance in an existing DB cluster. The first database
that is
        created defaults to a read-write DB instance.

        :param instance_id: The ID to give the newly created DB instance.
        :param cluster_id: The ID of the DB cluster where the DB instance is
created.
        :param db_engine: The database engine of a database to create in the DB
instance.
                          This must be compatible with the configured parameter
group
                          of the DB cluster.
        :param instance_class: The DB instance class for the newly created DB
instance.
        :return: Data about the newly created DB instance.
        """
        try:
            response = self.rds_client.create_db_instance(
                DBInstanceIdentifier=instance_id,
                DBClusterIdentifier=cluster_id,
                Engine=db_engine,
```

```
                DBInstanceClass=instance_class,
            )
            db_inst = response["DBInstance"]
        except ClientError as err:
            logger.error(
                "Couldn't create DB instance %s. Here's why: %s: %s",
                instance_id,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return db_inst


    def get_engine_versions(self, engine, parameter_group_family=None):
        """
        Gets database engine versions that are available for the specified engine
        and parameter group family.

        :param engine: The database engine to look up.
        :param parameter_group_family: When specified, restricts the returned
list of
                                       engine versions to those that are
compatible with
                                       this parameter group family.
        :return: The list of database engine versions.
        """
        try:
            kwargs = {"Engine": engine}
            if parameter_group_family is not None:
                kwargs["DBParameterGroupFamily"] = parameter_group_family
            response = self.rds_client.describe_db_engine_versions(**kwargs)
            versions = response["DBEngineVersions"]
        except ClientError as err:
            logger.error(
                "Couldn't get engine versions for %s. Here's why: %s: %s",
                engine,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return versions
```

```
    def get_orderable_instances(self, db_engine, db_engine_version):
        """
        Gets DB instance options that can be used to create DB instances that are
        compatible with a set of specifications.

        :param db_engine: The database engine that must be supported by the DB
instance.
        :param db_engine_version: The engine version that must be supported by
the DB instance.
        :return: The list of DB instance options that can be used to create a
compatible DB instance.
        """
        try:
            inst_opts = []
            paginator = self.rds_client.get_paginator(
                "describe_orderable_db_instance_options"
            )
            for page in paginator.paginate(
                Engine=db_engine, EngineVersion=db_engine_version
            ):
                inst_opts += page["OrderableDBInstanceOptions"]
        except ClientError as err:
            logger.error(
                "Couldn't get orderable DB instances. Here's why: %s: %s",
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return inst_opts


    def get_db_instance(self, instance_id):
        """
        Gets data about a DB instance.

        :param instance_id: The ID of the DB instance to retrieve.
        :return: The retrieved DB instance.
        """
        try:
            response = self.rds_client.describe_db_instances(
                DBInstanceIdentifier=instance_id
```

```
            )
            db_inst = response["DBInstances"][0]
        except ClientError as err:
            if err.response["Error"]["Code"] == "DBInstanceNotFound":
                logger.info("Instance %s does not exist.", instance_id)
            else:
                logger.error(
                    "Couldn't get DB instance %s. Here's why: %s: %s",
                    instance_id,
                    err.response["Error"]["Code"],
                    err.response["Error"]["Message"],
                )
                raise
        else:
            return db_inst


    def delete_db_instance(self, instance_id):
        """
        Deletes a DB instance.

        :param instance_id: The ID of the DB instance to delete.
        :return: Data about the deleted DB instance.
        """
        try:
            response = self.rds_client.delete_db_instance(
                DBInstanceIdentifier=instance_id,
                SkipFinalSnapshot=True,
                DeleteAutomatedBackups=True,
            )
            db_inst = response["DBInstance"]
        except ClientError as err:
            logger.error(
                "Couldn't delete DB instance %s. Here's why: %s: %s",
                instance_id,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return db_inst
```

- For API details, see the following topics in *Amazon SDK for Python (Boto3) API Reference*.
  - CreateDBCluster
  - CreateDBClusterParameterGroup
  - CreateDBClusterSnapshot
  - CreateDBInstance
  - DeleteDBCluster
  - DeleteDBClusterParameterGroup
  - DeleteDBInstance
  - DescribeDBClusterParameterGroups
  - DescribeDBClusterParameters
  - DescribeDBClusterSnapshots
  - DescribeDBClusters
  - DescribeDBEngineVersions
  - DescribeDBInstances
  - DescribeOrderableDBInstanceOptions
  - ModifyDBClusterParameterGroup

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

A library containing the scenario-specific functions for the Aurora scenario.

```
use phf::{phf_set, Set};
use secrecy::SecretString;
use std::{collections::HashMap, fmt::Display, time::Duration};
```

```
use aws_sdk_rds::{
    error::ProvideErrorMetadata,

 operation::create_db_cluster_parameter_group::CreateDbClusterParameterGroupOutput,
    types::{DbCluster, DbClusterParameterGroup, DbClusterSnapshot, DbInstance,
 Parameter},
};
use sdk_examples_test_utils::waiter::Waiter;
use tracing::{info, trace, warn};

const DB_ENGINE: &str = "aurora-mysql";
const DB_CLUSTER_PARAMETER_GROUP_NAME: &str =
 "RustSDKCodeExamplesDBParameterGroup";
const DB_CLUSTER_PARAMETER_GROUP_DESCRIPTION: &str =
    "Parameter Group created by Rust SDK Code Example";
const DB_CLUSTER_IDENTIFIER: &str = "RustSDKCodeExamplesDBCluster";
const DB_INSTANCE_IDENTIFIER: &str = "RustSDKCodeExamplesDBInstance";

static FILTER_PARAMETER_NAMES: Set<&'static str> = phf_set! {
    "auto_increment_offset",
    "auto_increment_increment",
};

#[derive(Debug, PartialEq, Eq)]
struct MetadataError {
    message: Option<String>,
    code: Option<String>,
}

impl MetadataError {
    fn from(err: &dyn ProvideErrorMetadata) -> Self {
        MetadataError {
            message: err.message().map(String::from),
            code: err.code().map(String::from),
        }
    }
}

impl Display for MetadataError {
    fn fmt(&self, f: &mut std::fmt::Formatter<'_>) -> std::fmt::Result {
        let display = match (&self.message, &self.code) {
            (None, None) => "Unknown".to_string(),
            (None, Some(code)) => format!("({code})"),
```

```
            (Some(message), None) => message.to_string(),
            (Some(message), Some(code)) => format!("{message} ({code})"),
        };
        write!(f, "{display}")
    }
}

#[derive(Debug, PartialEq, Eq)]
pub struct ScenarioError {
    message: String,
    context: Option<MetadataError>,
}

impl ScenarioError {
    pub fn with(message: impl Into<String>) -> Self {
        ScenarioError {
            message: message.into(),
            context: None,
        }
    }

    pub fn new(message: impl Into<String>, err: &dyn ProvideErrorMetadata) ->
 Self {
        ScenarioError {
            message: message.into(),
            context: Some(MetadataError::from(err)),
        }
    }
}

impl std::error::Error for ScenarioError {}
impl Display for ScenarioError {
    fn fmt(&self, f: &mut std::fmt::Formatter<'_>) -> std::fmt::Result {
        match &self.context {
            Some(c) => write!(f, "{}: {}", self.message, c),
            None => write!(f, "{}", self.message),
        }
    }
}

// Parse the ParameterName, Description, and AllowedValues values and display
 them.
#[derive(Debug)]
pub struct AuroraScenarioParameter {
```

```
    name: String,
    allowed_values: String,
    current_value: String,
}

impl Display for AuroraScenarioParameter {
    fn fmt(&self, f: &mut std::fmt::Formatter<'_>) -> std::fmt::Result {
        write!(
            f,
            "{}: {} (allowed: {})",
            self.name, self.current_value, self.allowed_values
        )
    }
}

impl From<aws_sdk_rds::types::Parameter> for AuroraScenarioParameter {
    fn from(value: aws_sdk_rds::types::Parameter) -> Self {
        AuroraScenarioParameter {
            name: value.parameter_name.unwrap_or_default(),
            allowed_values: value.allowed_values.unwrap_or_default(),
            current_value: value.parameter_value.unwrap_or_default(),
        }
    }
}

pub struct AuroraScenario {
    rds: crate::rds::Rds,
    engine_family: Option<String>,
    engine_version: Option<String>,
    instance_class: Option<String>,
    db_cluster_parameter_group: Option<DbClusterParameterGroup>,
    db_cluster_identifier: Option<String>,
    db_instance_identifier: Option<String>,
    username: Option<String>,
    password: Option<SecretString>,
}

impl AuroraScenario {
    pub fn new(client: crate::rds::Rds) -> Self {
        AuroraScenario {
            rds: client,
            engine_family: None,
            engine_version: None,
            instance_class: None,
```

```
            db_cluster_parameter_group: None,
            db_cluster_identifier: None,
            db_instance_identifier: None,
            username: None,
            password: None,
        }
    }

    // Get available engine families for Aurora MySql.
rds.DescribeDbEngineVersions(Engine='aurora-mysql') and build a set of the
'DBParameterGroupFamily' field values. I get {aurora-mysql8.0, aurora-mysql5.7}.
    pub async fn get_engines(&self) -> Result<HashMap<String, Vec<String>>,
ScenarioError> {
        let describe_db_engine_versions =
self.rds.describe_db_engine_versions(DB_ENGINE).await;
        trace!(versions=?describe_db_engine_versions, "full list of versions");

        if let Err(err) = describe_db_engine_versions {
            return Err(ScenarioError::new(
                "Failed to retrieve DB Engine Versions",
                &err,
            ));
        };

        let version_count = describe_db_engine_versions
            .as_ref()
            .map(|o| o.db_engine_versions().len())
            .unwrap_or_default();
        info!(version_count, "got list of versions");

        // Create a map of engine families to their available versions.
        let mut versions = HashMap::<String, Vec<String>>::new();
        describe_db_engine_versions
            .unwrap()
            .db_engine_versions()
            .iter()
            .filter_map(
                |v| match (&v.db_parameter_group_family, &v.engine_version) {
                    (Some(family), Some(version)) => Some((family.clone(),
version.clone())),
                    _ => None,
                },
            )
```

```
            .for_each(|(family, version)|
versions.entry(family).or_default().push(version));

        Ok(versions)
    }

    pub async fn get_instance_classes(&self) -> Result<Vec<String>,
ScenarioError> {
        let describe_orderable_db_instance_options_items = self
            .rds
            .describe_orderable_db_instance_options(
                DB_ENGINE,
                self.engine_version
                    .as_ref()
                    .expect("engine version for db instance options")
                    .as_str(),
            )
            .await;

        describe_orderable_db_instance_options_items
            .map(|options| {
                options
                    .iter()
                    .filter(|o| o.storage_type() == Some("aurora"))
                    .map(|o|
o.db_instance_class().unwrap_or_default().to_string())
                    .collect::<Vec<String>>()
            })
            .map_err(|err| ScenarioError::new("Could not get available instance
classes", &err))
    }

    // Select an engine family and create a custom DB cluster parameter group.
rds.CreateDbClusterParameterGroup(DBParameterGroupFamily='aurora-mysql8.0')
    pub async fn set_engine(&mut self, engine: &str, version: &str) -> Result<(),
ScenarioError> {
        self.engine_family = Some(engine.to_string());
        self.engine_version = Some(version.to_string());
        let create_db_cluster_parameter_group = self
            .rds
            .create_db_cluster_parameter_group(
                DB_CLUSTER_PARAMETER_GROUP_NAME,
                DB_CLUSTER_PARAMETER_GROUP_DESCRIPTION,
                engine,
```

```
            )
            .await;

        match create_db_cluster_parameter_group {
            Ok(CreateDbClusterParameterGroupOutput {
                db_cluster_parameter_group: None,
                ..
            }) => {
                return Err(ScenarioError::with(
                    "CreateDBClusterParameterGroup had empty response",
                ));
            }
            Err(error) => {
                if error.code() == Some("DBParameterGroupAlreadyExists") {
                    info!("Cluster Parameter Group already exists, nothing to
do");
                } else {
                    return Err(ScenarioError::new(
                        "Could not create Cluster Parameter Group",
                        &error,
                    ));
                }
            }
            _ => {
                info!("Created Cluster Parameter Group");
            }
        }

        Ok(())
    }

    pub fn set_instance_class(&mut self, instance_class: Option<String>) {
        self.instance_class = instance_class;
    }

    pub fn set_login(&mut self, username: Option<String>, password:
Option<SecretString>) {
        self.username = username;
        self.password = password;
    }

    pub async fn connection_string(&self) -> Result<String, ScenarioError> {
        let cluster = self.get_cluster().await?;
        let endpoint = cluster.endpoint().unwrap_or_default();
```

```
        let port = cluster.port().unwrap_or_default();
        let username = cluster.master_username().unwrap_or_default();
        Ok(format!("mysql -h {endpoint} -P {port} -u {username} -p"))
    }

    pub async fn get_cluster(&self) -> Result<DbCluster, ScenarioError> {
        let describe_db_clusters_output = self
            .rds
            .describe_db_clusters(
                self.db_cluster_identifier
                    .as_ref()
                    .expect("cluster identifier")
                    .as_str(),
            )
            .await;
        if let Err(err) = describe_db_clusters_output {
            return Err(ScenarioError::new("Failed to get cluster", &err));
        }

        let db_cluster = describe_db_clusters_output
            .unwrap()
            .db_clusters
            .and_then(|output| output.first().cloned());

        db_cluster.ok_or_else(|| ScenarioError::with("Did not find the cluster"))
    }

    // Get the parameter group. rds.DescribeDbClusterParameterGroups
    // Get parameters in the group. This is a long list so you will have to
paginate. Find the auto_increment_offset and auto_increment_increment parameters
(by ParameterName). rds.DescribeDbClusterParameters
    // Parse the ParameterName, Description, and AllowedValues values and display
them.
    pub async fn cluster_parameters(&self) ->
Result<Vec<AuroraScenarioParameter>, ScenarioError> {
        let parameters_output = self
            .rds
            .describe_db_cluster_parameters(DB_CLUSTER_PARAMETER_GROUP_NAME)
            .await;

        if let Err(err) = parameters_output {
            return Err(ScenarioError::new(
                format!("Failed to retrieve parameters for
{DB_CLUSTER_PARAMETER_GROUP_NAME}"),
```

```
                &err,
            ));
        }

        let parameters = parameters_output
            .unwrap()
            .into_iter()
            .flat_map(|p| p.parameters.unwrap_or_default().into_iter())
            .filter(|p|
FILTER_PARAMETER_NAMES.contains(p.parameter_name().unwrap_or_default()))
            .map(AuroraScenarioParameter::from)
            .collect::<Vec<_>>();

        Ok(parameters)
    }

    // Modify both the auto_increment_offset and auto_increment_increment
parameters in one call in the custom parameter group. Set their ParameterValue
fields to a new allowable value. rds.ModifyDbClusterParameterGroup.
    pub async fn update_auto_increment(
        &self,
        offset: u8,
        increment: u8,
    ) -> Result<(), ScenarioError> {
        let modify_db_cluster_parameter_group = self
            .rds
            .modify_db_cluster_parameter_group(
                DB_CLUSTER_PARAMETER_GROUP_NAME,
                vec![
                    Parameter::builder()
                        .parameter_name("auto_increment_offset")
                        .parameter_value(format!("{offset}"))
                        .apply_method(aws_sdk_rds::types::ApplyMethod::Immediate)
                        .build(),
                    Parameter::builder()
                        .parameter_name("auto_increment_increment")
                        .parameter_value(format!("{increment}"))
                        .apply_method(aws_sdk_rds::types::ApplyMethod::Immediate)
                        .build(),
                ],
            )
            .await;

        if let Err(error) = modify_db_cluster_parameter_group {
```

```
            return Err(ScenarioError::new(
                "Failed to modify cluster parameter group",
                &error,
            ));
        }

        Ok(())
    }

    // Get a list of allowed engine versions.
rds.DescribeDbEngineVersions(Engine='aurora-mysql', DBParameterGroupFamily=<the
family used to create your parameter group in step 2>)
    // Create an Aurora DB cluster database cluster that contains a MySql
database and uses the parameter group you created.
    // Wait for DB cluster to be ready. Call rds.DescribeDBClusters and check for
Status == 'available'.
    // Get a list of instance classes available for the selected engine
and engine version. rds.DescribeOrderableDbInstanceOptions(Engine='mysql',
EngineVersion=).

    // Create a database instance in the cluster.
    // Wait for DB instance to be ready. Call rds.DescribeDbInstances and check
for DBInstanceStatus == 'available'.
    pub async fn start_cluster_and_instance(&mut self) -> Result<(),
ScenarioError> {
        if self.password.is_none() {
            return Err(ScenarioError::with(
                "Must set Secret Password before starting a cluster",
            ));
        }
        let create_db_cluster = self
            .rds
            .create_db_cluster(
                DB_CLUSTER_IDENTIFIER,
                DB_CLUSTER_PARAMETER_GROUP_NAME,
                DB_ENGINE,
                self.engine_version.as_deref().expect("engine version"),
                self.username.as_deref().expect("username"),
                self.password
                    .replace(SecretString::new("".to_string()))
                    .expect("password"),
            )
            .await;
        if let Err(err) = create_db_cluster {
```

```
            return Err(ScenarioError::new(
                "Failed to create DB Cluster with cluster group",
                &err,
            ));
        }

        self.db_cluster_identifier = create_db_cluster
            .unwrap()
            .db_cluster
            .and_then(|c| c.db_cluster_identifier);

        if self.db_cluster_identifier.is_none() {
            return Err(ScenarioError::with("Created DB Cluster missing
Identifier"));
        }

        info!(
            "Started a db cluster: {}",
            self.db_cluster_identifier
                .as_deref()
                .unwrap_or("Missing ARN")
        );

        let create_db_instance = self
            .rds
            .create_db_instance(
                self.db_cluster_identifier.as_deref().expect("cluster name"),
                DB_INSTANCE_IDENTIFIER,
                self.instance_class.as_deref().expect("instance class"),
                DB_ENGINE,
            )
            .await;
        if let Err(err) = create_db_instance {
            return Err(ScenarioError::new(
                "Failed to create Instance in DB Cluster",
                &err,
            ));
        }

        self.db_instance_identifier = create_db_instance
            .unwrap()
            .db_instance
            .and_then(|i| i.db_instance_identifier);
```

```
        // Cluster creation can take up to 20 minutes to become available
        let cluster_max_wait = Duration::from_secs(20 * 60);
        let waiter = Waiter::builder().max(cluster_max_wait).build();
        while waiter.sleep().await.is_ok() {
            let cluster = self
                .rds
                .describe_db_clusters(
                    self.db_cluster_identifier
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = cluster {
                warn!(?err, "Failed to describe cluster while waiting for
ready");
                continue;
            }

            let instance = self
                .rds
                .describe_db_instance(
                    self.db_instance_identifier
                        .as_deref()
                        .expect("instance identifier"),
                )
                .await;
            if let Err(err) = instance {
                return Err(ScenarioError::new(
                    "Failed to find instance for cluster",
                    &err,
                ));
            }

            let instances_available = instance
                .unwrap()
                .db_instances()
                .iter()
                .all(|instance| instance.db_instance_status() ==
Some("Available"));

            let endpoints = self
                .rds
                .describe_db_cluster_endpoints(
```

```
                    self.db_cluster_identifier
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = endpoints {
                return Err(ScenarioError::new(
                    "Failed to find endpoint for cluster",
                    &err,
                ));
            }

            let endpoints_available = endpoints
                .unwrap()
                .db_cluster_endpoints()
                .iter()
                .all(|endpoint| endpoint.status() == Some("available"));

            if instances_available && endpoints_available {
                return Ok(());
            }
        }

        Err(ScenarioError::with("timed out waiting for cluster"))
    }

    // Create a snapshot of the DB cluster. rds.CreateDbClusterSnapshot.
    // Wait for the snapshot to create. rds.DescribeDbClusterSnapshots until
Status == 'available'.
    pub async fn snapshot(&self, name: &str) -> Result<DbClusterSnapshot,
ScenarioError> {
        let id = self.db_cluster_identifier.as_deref().unwrap_or_default();
        let snapshot = self
            .rds
            .snapshot_cluster(id, format!("{id}_{name}").as_str())
            .await;
        match snapshot {
            Ok(output) => match output.db_cluster_snapshot {
                Some(snapshot) => Ok(snapshot),
                None => Err(ScenarioError::with("Missing Snapshot")),
            },
            Err(err) => Err(ScenarioError::new("Failed to create snapshot",
&err)),
```

```
        }
    }

    pub async fn clean_up(self) -> Result<(), Vec<ScenarioError>> {
        let mut clean_up_errors: Vec<ScenarioError> = vec![];

        // Delete the instance. rds.DeleteDbInstance.
        let delete_db_instance = self
            .rds
            .delete_db_instance(
                self.db_instance_identifier
                    .as_deref()
                    .expect("instance identifier"),
            )
            .await;
        if let Err(err) = delete_db_instance {
            let identifier = self
                .db_instance_identifier
                .as_deref()
                .unwrap_or("Missing Instance Identifier");
            let message = format!("failed to delete db instance {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance to delete
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_instances =
self.rds.describe_db_instances().await;
                if let Err(err) = describe_db_instances {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check instance state during deletion",
                        &err,
                    ));
                    break;
                }
                let db_instances = describe_db_instances
                    .unwrap()
                    .db_instances()
                    .iter()
                    .filter(|instance| instance.db_cluster_identifier ==
self.db_cluster_identifier)
                    .cloned()
                    .collect::<Vec<DbInstance>>();
```

```
                if db_instances.is_empty() {
                    trace!("Delete Instance waited and no instances were found");
                    break;
                }
                match db_instances.first().unwrap().db_instance_status() {
                    Some("Deleting") => continue,
                    Some(status) => {
                        info!("Attempting to delete but instances is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB instance");
                        break;
                    }
                }
            }
        }

        // Delete the DB cluster. rds.DeleteDbCluster.
        let delete_db_cluster = self
            .rds
            .delete_db_cluster(
                self.db_cluster_identifier
                    .as_deref()
                    .expect("cluster identifier"),
            )
            .await;

        if let Err(err) = delete_db_cluster {
            let identifier = self
                .db_cluster_identifier
                .as_deref()
                .unwrap_or("Missing DB Cluster Identifier");
            let message = format!("failed to delete db cluster {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance and cluster to fully delete.
rds.DescribeDbInstances and rds.DescribeDbClusters until both are not found.
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_clusters = self
                    .rds
                    .describe_db_clusters(
```

```
                        self.db_cluster_identifier
                            .as_deref()
                            .expect("cluster identifier"),
                    )
                    .await;
                if let Err(err) = describe_db_clusters {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check cluster state during deletion",
                        &err,
                    ));
                    break;
                }
                let describe_db_clusters = describe_db_clusters.unwrap();
                let db_clusters = describe_db_clusters.db_clusters();
                if db_clusters.is_empty() {
                    trace!("Delete cluster waited and no clusters were found");
                    break;
                }
                match db_clusters.first().unwrap().status() {
                    Some("Deleting") => continue,
                    Some(status) => {
                        info!("Attempting to delete but clusters is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB cluster");
                        break;
                    }
                }
            }
        }

        // Delete the DB cluster parameter group.
rds.DeleteDbClusterParameterGroup.
        let delete_db_cluster_parameter_group = self
            .rds
            .delete_db_cluster_parameter_group(
                self.db_cluster_parameter_group
                    .map(|g| {
                        g.db_cluster_parameter_group_name
                            .unwrap_or_else(||
DB_CLUSTER_PARAMETER_GROUP_NAME.to_string())
                    })
```

```
                    .as_deref()
                    .expect("cluster parameter group name"),
            )
            .await;
        if let Err(error) = delete_db_cluster_parameter_group {
            clean_up_errors.push(ScenarioError::new(
                "Failed to delete the db cluster parameter group",
                &error,
            ))
        }

        if clean_up_errors.is_empty() {
            Ok(())
        } else {
            Err(clean_up_errors)
        }
    }
}

#[cfg(test)]
pub mod tests;
```

Tests for the library using automocks around the RDS Client wrapper.

```

use crate::rds::MockRdsImpl;

use super::*;

use std::io::{Error, ErrorKind};

use assert_matches::assert_matches;
use aws_sdk_rds::{
    error::SdkError,
    operation::{
        create_db_cluster::{CreateDBClusterError, CreateDbClusterOutput},
        create_db_cluster_parameter_group::CreateDBClusterParameterGroupError,
        create_db_cluster_snapshot::{CreateDBClusterSnapshotError,
 CreateDbClusterSnapshotOutput},
        create_db_instance::{CreateDBInstanceError, CreateDbInstanceOutput},
        delete_db_cluster::DeleteDbClusterOutput,
        delete_db_cluster_parameter_group::DeleteDbClusterParameterGroupOutput,
```

```
        delete_db_instance::DeleteDbInstanceOutput,
        describe_db_cluster_endpoints::DescribeDbClusterEndpointsOutput,
        describe_db_cluster_parameters::{
            DescribeDBClusterParametersError, DescribeDbClusterParametersOutput,
        },
        describe_db_clusters::{DescribeDBClustersError,
 DescribeDbClustersOutput},
        describe_db_engine_versions::{
            DescribeDBEngineVersionsError, DescribeDbEngineVersionsOutput,
        },
        describe_db_instances::{DescribeDBInstancesError,
 DescribeDbInstancesOutput},

 describe_orderable_db_instance_options::DescribeOrderableDBInstanceOptionsError,
        modify_db_cluster_parameter_group::{
            ModifyDBClusterParameterGroupError,
 ModifyDbClusterParameterGroupOutput,
        },
    },
    types::{
        error::DbParameterGroupAlreadyExistsFault, DbClusterEndpoint,
 DbEngineVersion,
        OrderableDbInstanceOption,
    },
};
use aws_smithy_runtime_api::http::{Response, StatusCode};
use aws_smithy_types::body::SdkBody;
use mockall::predicate::eq;
use secrecy::ExposeSecret;

#[tokio::test]
async fn test_scenario_set_engine() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .with(
            eq("RustSDKCodeExamplesDBParameterGroup"),
            eq("Parameter Group created by Rust SDK Code Example"),
            eq("aurora-mysql"),
        )
        .return_once(|_, _, _| {
            Ok(CreateDbClusterParameterGroupOutput::builder()
```

```
 .db_cluster_parameter_group(DbClusterParameterGroup::builder().build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);

    let set_engine = scenario.set_engine("aurora-mysql", "aurora-
mysql8.0").await;

    assert_eq!(set_engine, Ok(()));
    assert_eq!(Some("aurora-mysql"), scenario.engine_family.as_deref());
    assert_eq!(Some("aurora-mysql8.0"), scenario.engine_version.as_deref());
}

#[tokio::test]
async fn test_scenario_set_engine_not_create() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .with(
            eq("RustSDKCodeExamplesDBParameterGroup"),
            eq("Parameter Group created by Rust SDK Code Example"),
            eq("aurora-mysql"),
        )
        .return_once(|_, _, _|
 Ok(CreateDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);

    let set_engine = scenario.set_engine("aurora-mysql", "aurora-
mysql8.0").await;

    assert!(set_engine.is_err());
}

#[tokio::test]
async fn test_scenario_set_engine_param_group_exists() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .withf(|_, _, _| true)
```

```
        .return_once(|_, _, _| {
            Err(SdkError::service_error(

 CreateDBClusterParameterGroupError::DbParameterGroupAlreadyExistsFault(
                    DbParameterGroupAlreadyExistsFault::builder().build(),
                ),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);

    let set_engine = scenario.set_engine("aurora-mysql", "aurora-
mysql8.0").await;

    assert!(set_engine.is_err());
}

#[tokio::test]
async fn test_scenario_get_engines() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_engine_versions()
        .with(eq("aurora-mysql"))
        .return_once(|_| {
            Ok(DescribeDbEngineVersionsOutput::builder()
                .db_engine_versions(
                    DbEngineVersion::builder()
                        .db_parameter_group_family("f1")
                        .engine_version("f1a")
                        .build(),
                )
                .db_engine_versions(
                    DbEngineVersion::builder()
                        .db_parameter_group_family("f1")
                        .engine_version("f1b")
                        .build(),
                )
                .db_engine_versions(
                    DbEngineVersion::builder()
                        .db_parameter_group_family("f2")
                        .engine_version("f2a")
```

```
                        .build(),
                )
                .db_engine_versions(DbEngineVersion::builder().build())
                .build())
        });

    let scenario = AuroraScenario::new(mock_rds);

    let versions_map = scenario.get_engines().await;

    assert_eq!(
        versions_map,
        Ok(HashMap::from([
            ("f1".into(), vec!["f1a".into(), "f1b".into()]),
            ("f2".into(), vec!["f2a".into()])
        ]))
    );
}

#[tokio::test]
async fn test_scenario_get_engines_failed() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_engine_versions()
        .with(eq("aurora-mysql"))
        .return_once(|_| {
            Err(SdkError::service_error(
                DescribeDBEngineVersionsError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe_db_engine_versions error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let scenario = AuroraScenario::new(mock_rds);

    let versions_map = scenario.get_engines().await;
    assert_matches!(
        versions_map,
        Err(ScenarioError { message, context: _ }) if message == "Failed to
 retrieve DB Engine Versions"
```

```
    );
}

#[tokio::test]
async fn test_scenario_get_instance_classes() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .return_once(|_, _, _| {
            Ok(CreateDbClusterParameterGroupOutput::builder()

 .db_cluster_parameter_group(DbClusterParameterGroup::builder().build())
                .build())
        });

    mock_rds
        .expect_describe_orderable_db_instance_options()
        .with(eq("aurora-mysql"), eq("aurora-mysql8.0"))
        .return_once(|_, _| {
            Ok(vec![
                OrderableDbInstanceOption::builder()
                    .db_instance_class("t1")
                    .storage_type("aurora")
                    .build(),
                OrderableDbInstanceOption::builder()
                    .db_instance_class("t1")
                    .storage_type("aurora-iopt1")
                    .build(),
                OrderableDbInstanceOption::builder()
                    .db_instance_class("t2")
                    .storage_type("aurora")
                    .build(),
                OrderableDbInstanceOption::builder()
                    .db_instance_class("t3")
                    .storage_type("aurora")
                    .build(),
            ])
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario
        .set_engine("aurora-mysql", "aurora-mysql8.0")
        .await
```

```
        .expect("set engine");

    let instance_classes = scenario.get_instance_classes().await;

    assert_eq!(
        instance_classes,
        Ok(vec!["t1".into(), "t2".into(), "t3".into()])
    );
}

#[tokio::test]
async fn test_scenario_get_instance_classes_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_orderable_db_instance_options()
        .with(eq("aurora-mysql"), eq("aurora-mysql8.0"))
        .return_once(|_, _| {
            Err(SdkError::service_error(

 DescribeOrderableDBInstanceOptionsError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe_orderable_db_instance_options_error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_family = Some("aurora-mysql".into());
    scenario.engine_version = Some("aurora-mysql8.0".into());

    let instance_classes = scenario.get_instance_classes().await;

    assert_matches!(
        instance_classes,
        Err(ScenarioError {message, context: _}) if message == "Could not get
 available instance classes"
    );
}

#[tokio::test]
async fn test_scenario_get_cluster() {
```

```
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|_| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(DbCluster::builder().build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("RustSDKCodeExamplesDBCluster".into());
    let cluster = scenario.get_cluster().await;

    assert!(cluster.is_ok());
}

#[tokio::test]
async fn test_scenario_get_cluster_missing_cluster() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .return_once(|_, _, _| {
            Ok(CreateDbClusterParameterGroupOutput::builder()

 .db_cluster_parameter_group(DbClusterParameterGroup::builder().build())
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|_| Ok(DescribeDbClustersOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("RustSDKCodeExamplesDBCluster".into());
    let cluster = scenario.get_cluster().await;

    assert_matches!(cluster, Err(ScenarioError { message, context: _ }) if
 message == "Did not find the cluster");
}
```

```
#[tokio::test]
async fn test_scenario_get_cluster_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .return_once(|_, _, _| {
            Ok(CreateDbClusterParameterGroupOutput::builder()

 .db_cluster_parameter_group(DbClusterParameterGroup::builder().build())
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe_db_clusters_error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("RustSDKCodeExamplesDBCluster".into());
    let cluster = scenario.get_cluster().await;

    assert_matches!(cluster, Err(ScenarioError { message, context: _ }) if
 message == "Failed to get cluster");
}

#[tokio::test]
async fn test_scenario_connection_string() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|_| {
            Ok(DescribeDbClustersOutput::builder()
```

```
                .db_clusters(
                    DbCluster::builder()
                        .endpoint("test_endpoint")
                        .port(3306)
                        .master_username("test_username")
                        .build(),
                )
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("RustSDKCodeExamplesDBCluster".into());
    let connection_string = scenario.connection_string().await;

    assert_eq!(
        connection_string,
        Ok("mysql -h test_endpoint -P 3306 -u test_username -p".into())
    );
}

#[tokio::test]
async fn test_scenario_cluster_parameters() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_cluster_parameters()
        .with(eq("RustSDKCodeExamplesDBParameterGroup"))
        .return_once(|_| {
            Ok(vec![DescribeDbClusterParametersOutput::builder()
                .parameters(Parameter::builder().parameter_name("a").build())
                .parameters(Parameter::builder().parameter_name("b").build())
                .parameters(
                    Parameter::builder()
                        .parameter_name("auto_increment_offset")
                        .build(),
                )
                .parameters(Parameter::builder().parameter_name("c").build())
                .parameters(
                    Parameter::builder()
                        .parameter_name("auto_increment_increment")
                        .build(),
                )
                .parameters(Parameter::builder().parameter_name("d").build())
                .build()])
```

```
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("RustSDKCodeExamplesDBCluster".into());

    let params = scenario.cluster_parameters().await.expect("cluster params");
    let names: Vec<String> = params.into_iter().map(|p| p.name).collect();
    assert_eq!(
        names,
        vec!["auto_increment_offset", "auto_increment_increment"]
    );
}

#[tokio::test]
async fn test_scenario_cluster_parameters_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_cluster_parameters()
        .with(eq("RustSDKCodeExamplesDBParameterGroup"))
        .return_once(|_| {
            Err(SdkError::service_error(
                DescribeDBClusterParametersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe_db_cluster_parameters_error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("RustSDKCodeExamplesDBCluster".into());
    let params = scenario.cluster_parameters().await;
    assert_matches!(params, Err(ScenarioError { message, context: _ }) if message
 == "Failed to retrieve parameters for RustSDKCodeExamplesDBParameterGroup");
}

#[tokio::test]
async fn test_scenario_update_auto_increment() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_modify_db_cluster_parameter_group()
```

```
        .withf(|name, params| {
            assert_eq!(name, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(
                params,
                &vec![
                    Parameter::builder()
                        .parameter_name("auto_increment_offset")
                        .parameter_value("10")
                        .apply_method(aws_sdk_rds::types::ApplyMethod::Immediate)
                        .build(),
                    Parameter::builder()
                        .parameter_name("auto_increment_increment")
                        .parameter_value("20")
                        .apply_method(aws_sdk_rds::types::ApplyMethod::Immediate)
                        .build(),
                ]
            );
            true
        })
        .return_once(|_, _|
 Ok(ModifyDbClusterParameterGroupOutput::builder().build()));

    let scenario = AuroraScenario::new(mock_rds);

    scenario
        .update_auto_increment(10, 20)
        .await
        .expect("update auto increment");
}

#[tokio::test]
async fn test_scenario_update_auto_increment_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_modify_db_cluster_parameter_group()
        .return_once(|_, _| {
            Err(SdkError::service_error(

 ModifyDBClusterParameterGroupError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "modify_db_cluster_parameter_group_error",
                ))),
```

```
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let scenario = AuroraScenario::new(mock_rds);

    let update = scenario.update_auto_increment(10, 20).await;
    assert_matches!(update, Err(ScenarioError { message, context: _}) if message
 == "Failed to modify cluster parameter group");
}

#[tokio::test]
async fn test_start_cluster_and_instance() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
```

```
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_describe_db_instance()
        .with(eq("RustSDKCodeExamplesDBInstance"))
        .return_once(|name| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_instance_identifier(name)
                        .db_instance_status("Available")
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

.db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });
```

```
    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
        assert!(scenario
            .password
            .replace(SecretString::new("BAD SECRET".into()))
            .unwrap()
            .expose_secret()
            .is_empty());
        assert_eq!(
            scenario.db_cluster_identifier,
            Some("RustSDKCodeExamplesDBCluster".into())
        );
    });
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Err(SdkError::service_error(
                CreateDBClusterError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db cluster error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });
```

```
    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _}) if message
 == "Failed to create DB Cluster with cluster group")
}

#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_missing_id() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()
                .db_cluster(DbCluster::builder().build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context:_ }) if message
 == "Created DB Cluster missing Identifier");
}

#[tokio::test]
async fn test_start_cluster_and_instance_instance_create_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
```

```
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .return_once(|_, _, _, _| {
            Err(SdkError::service_error(
                CreateDBInstanceError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db instance error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _ }) if message
 == "Failed to create Instance in DB Cluster")
}

#[tokio::test]
async fn test_start_cluster_and_instance_wait_hiccup() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
```

```
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

.db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe cluster error",
```

```
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        })
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds.expect_describe_db_instance().return_once(|name| {
        Ok(DescribeDbInstancesOutput::builder()
            .db_instances(
                DbInstance::builder()
                    .db_instance_identifier(name)
                    .db_instance_status("Available")
                    .build(),
            )
            .build())
    });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

.db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
```

```
    });

    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_scenario_clean_up() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
                .build())
        })
        .with()
        .times(1)
        .returning(|| Ok(DescribeDbInstancesOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster()
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
```

```
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| Ok(DescribeDbClustersOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
            .build(),
    );

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_ok());
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
Describe Cluster
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
Describe Cluster
    tokio::time::resume();
```

```
    let _ = assertions.await;
}

#[tokio::test]
async fn test_scenario_clean_up_errors() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
                .build())
        })
        .with()
        .times(1)
        .returning(|| {
            Err(SdkError::service_error(
                DescribeDBInstancesError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db instances error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    mock_rds
        .expect_delete_db_cluster()
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));
```

```
    mock_rds
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db clusters error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        });

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
            .build(),
    );

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
```

```
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_err());
        let errs = clean_up.unwrap_err();
        assert_eq!(errs.len(), 2);
        assert_matches!(errs.first(), Some(ScenarioError {message, context: _})
 if message == "Failed to check instance state during deletion");
        assert_matches!(errs.get(1), Some(ScenarioError {message, context: _}) if
 message == "Failed to check cluster state during deletion");
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Cluster
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Cluster
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_scenario_snapshot() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_snapshot_cluster()
        .with(eq("MockCluster"), eq("MockCluster_MockSnapshot"))
        .times(1)
        .return_once(|_, _| {
            Ok(CreateDbClusterSnapshotOutput::builder()
                .db_cluster_snapshot(
                    DbClusterSnapshot::builder()
                        .db_cluster_identifier("MockCluster")

 .db_cluster_snapshot_identifier("MockCluster_MockSnapshot")
                        .build(),
                )
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("MockCluster".into());
```

```
    let create_snapshot = scenario.snapshot("MockSnapshot").await;
    assert!(create_snapshot.is_ok());
}

#[tokio::test]
async fn test_scenario_snapshot_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_snapshot_cluster()
        .with(eq("MockCluster"), eq("MockCluster_MockSnapshot"))
        .times(1)
        .return_once(|_, _| {
            Err(SdkError::service_error(
                CreateDBClusterSnapshotError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create snapshot error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("MockCluster".into());
    let create_snapshot = scenario.snapshot("MockSnapshot").await;
    assert_matches!(create_snapshot, Err(ScenarioError { message, context: _}) if
 message == "Failed to create snapshot");
}

#[tokio::test]
async fn test_scenario_snapshot_invalid() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_snapshot_cluster()
        .with(eq("MockCluster"), eq("MockCluster_MockSnapshot"))
        .times(1)
        .return_once(|_, _|
 Ok(CreateDbClusterSnapshotOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("MockCluster".into());
    let create_snapshot = scenario.snapshot("MockSnapshot").await;
```

```
    assert_matches!(create_snapshot, Err(ScenarioError { message, context: _}) if
 message == "Missing Snapshot");
}
```

A binary to run the scenario from front to end, using inquirer so that the user can make some decisions.

```
use std::fmt::Display;

use anyhow::anyhow;
use aurora_code_examples::{
    aurora_scenario::{AuroraScenario, ScenarioError},
    rds::Rds as RdsClient,
};
use aws_sdk_rds::Client;
use inquire::{validator::StringValidator, CustomUserError};
use secrecy::SecretString;
use tracing::warn;

#[derive(Default, Debug)]
struct Warnings(Vec<String>);

impl Warnings {
    fn new() -> Self {
        Warnings(Vec::with_capacity(5))
    }

    fn push(&mut self, warning: &str, error: ScenarioError) {
        let formatted = format!("{warning}: {error}");
        warn!("{formatted}");
        self.0.push(formatted);
    }

    fn is_empty(&self) -> bool {
        self.0.is_empty()
    }
}

impl Display for Warnings {
    fn fmt(&self, f: &mut std::fmt::Formatter<'_>) -> std::fmt::Result {
        writeln!(f, "Warnings:")?;
```

```
        for warning in &self.0 {
            writeln!(f, "{: >4}- {warning}", "")?;
        }
        Ok(())
    }
}

fn select(
    prompt: &str,
    choices: Vec<String>,
    error_message: &str,
) -> Result<String, anyhow::Error> {
    inquire::Select::new(prompt, choices)
        .prompt()
        .map_err(|error| anyhow!("{error_message}: {error}"))
}

// Prepare the Aurora Scenario. Prompt for several settings that are optional to
 the Scenario, but that the user should choose for the demo.
// This includes the engine, engine version, and instance class.
async fn prepare_scenario(rds: RdsClient) -> Result<AuroraScenario,
 anyhow::Error> {
    let mut scenario = AuroraScenario::new(rds);

    // Get available engine families for Aurora MySql.
 rds.DescribeDbEngineVersions(Engine='aurora-mysql') and build a set of the
 'DBParameterGroupFamily' field values. I get {aurora-mysql8.0, aurora-mysql5.7}.
    let available_engines = scenario.get_engines().await;
    if let Err(error) = available_engines {
        return Err(anyhow!("Failed to get available engines: {}", error));
    }
    let available_engines = available_engines.unwrap();

    // Select an engine family and create a custom DB cluster parameter group.
 rds.CreateDbClusterParameterGroup(DBParameterGroupFamily='aurora-mysql8.0')
    let engine = select(
        "Select an Aurora engine family",
        available_engines.keys().cloned().collect::<Vec<String>>(),
        "Invalid engine selection",
    )?;

    let version = select(
        format!("Select an Aurora engine version for {engine}").as_str(),
        available_engines.get(&engine).cloned().unwrap_or_default(),
```

```
        "Invalid engine version selection",
    )?;

    let set_engine = scenario.set_engine(engine.as_str(),
 version.as_str()).await;
    if let Err(error) = set_engine {
        return Err(anyhow!("Could not set engine: {}", error));
    }

    let instance_classes = scenario.get_instance_classes().await;
    match instance_classes {
        Ok(classes) => {
            let instance_class = select(
                format!("Select an Aurora instance class for {engine}").as_str(),
                classes,
                "Invalid instance class selection",
            )?;
            scenario.set_instance_class(Some(instance_class))
        }
        Err(err) => return Err(anyhow!("Failed to get instance classes for
 engine: {err}")),
    }

    Ok(scenario)
}

// Prepare the cluster, creating a custom parameter group overriding some group
 parameters based on user input.
async fn prepare_cluster(scenario: &mut AuroraScenario, warnings: &mut Warnings)
 -> Result<(), ()> {
    show_parameters(scenario, warnings).await;

    let offset = prompt_number_or_default(warnings, "auto_increment_offset", 5);
    let increment = prompt_number_or_default(warnings,
 "auto_increment_increment", 3);

    // Modify both the auto_increment_offset and auto_increment_increment
 parameters in one call in the custom parameter group. Set their ParameterValue
 fields to a new allowable value. rds.ModifyDbClusterParameterGroup.
    let update_auto_increment = scenario.update_auto_increment(offset,
 increment).await;

    if let Err(error) = update_auto_increment {
        warnings.push("Failed to update auto increment", error);
```

```
        return Err(());
    }

    // Get and display the updated parameters. Specify Source of 'user' to get
just the modified parameters. rds.DescribeDbClusterParameters(Source='user')
    show_parameters(scenario, warnings).await;

    let username = inquire::Text::new("Username for the database (default
'testuser')")
        .with_default("testuser")
        .with_initial_value("testuser")
        .prompt();

    if let Err(error) = username {
        warnings.push(
            "Failed to get username, using default",
            ScenarioError::with(format!("Error from inquirer: {error}")),
        );
        return Err(());
    }
    let username = username.unwrap();

    let password = inquire::Text::new("Password for the database (minimum 8
characters)")
        .with_validator(|i: &str| {
            if i.len() >= 8 {
                Ok(inquire::validator::Validation::Valid)
            } else {
                Ok(inquire::validator::Validation::Invalid(
                    "Password must be at least 8 characters".into(),
                ))
            }
        })
        .prompt();

    let password: Option<SecretString> = match password {
        Ok(password) => Some(SecretString::from(password)),
        Err(error) => {
            warnings.push(
                "Failed to get password, using none (and not starting a DB)",
                ScenarioError::with(format!("Error from inquirer: {error}")),
            );
            return Err(());
        }
```

```
    };

    scenario.set_login(Some(username), password);

    Ok(())
}

// Start a single instance in the cluster,
async fn run_instance(scenario: &mut AuroraScenario) -> Result<(), ScenarioError>
 {
    // Create an Aurora DB cluster database cluster that contains a MySql
 database and uses the parameter group you created.
    // Create a database instance in the cluster.
    // Wait for DB instance to be ready. Call rds.DescribeDbInstances and check
 for DBInstanceStatus == 'available'.
    scenario.start_cluster_and_instance().await?;

    let connection_string = scenario.connection_string().await?;

    println!("Database ready: {connection_string}",);

    let _ = inquire::Text::new("Use the database with the connection string. When
 you're finished, press enter key to continue.").prompt();

    // Create a snapshot of the DB cluster. rds.CreateDbClusterSnapshot.
    // Wait for the snapshot to create. rds.DescribeDbClusterSnapshots until
 Status == 'available'.
    let snapshot_name = inquire::Text::new("Provide a name for the snapshot")
        .prompt()
        .unwrap_or(String::from("ScenarioRun"));
    let snapshot = scenario.snapshot(snapshot_name.as_str()).await?;
    println!(
        "Snapshot is available: {}",
        snapshot.db_cluster_snapshot_arn().unwrap_or("Missing ARN")
    );

    Ok(())
}

#[tokio::main]
async fn main() -> Result<(), anyhow::Error> {
    tracing_subscriber::fmt::init();
    let sdk_config = aws_config::from_env().load().await;
    let client = Client::new(&sdk_config);
```

```
    let rds = RdsClient::new(client);
    let mut scenario = prepare_scenario(rds).await?;

    // At this point, the scenario has things in AWS and needs to get cleaned up.
    let mut warnings = Warnings::new();

    if prepare_cluster(&mut scenario, &mut warnings).await.is_ok() {
        println!("Configured database cluster, starting an instance.");
        if let Err(err) = run_instance(&mut scenario).await {
            warnings.push("Problem running instance", err);
        }
    }

    // Clean up the instance, cluster, and parameter group, waiting for the
 instance and cluster to delete before moving on.
    let clean_up = scenario.clean_up().await;
    if let Err(errors) = clean_up {
        for error in errors {
            warnings.push("Problem cleaning up scenario", error);
        }
    }

    if warnings.is_empty() {
        Ok(())
    } else {
        println!("There were problems running the scenario:");
        println!("{warnings}");
        Err(anyhow!("There were problems running the scenario"))
    }
}

#[derive(Clone)]
struct U8Validator {}
impl StringValidator for U8Validator {
    fn validate(&self, input: &str) -> Result<inquire::validator::Validation,
 CustomUserError> {
        if input.parse::<u8>().is_err() {
            Ok(inquire::validator::Validation::Invalid(
                "Can't parse input as number".into(),
            ))
        } else {
            Ok(inquire::validator::Validation::Valid)
        }
    }
```

```
}

async fn show_parameters(scenario: &AuroraScenario, warnings: &mut Warnings) {
    let parameters = scenario.cluster_parameters().await;

    match parameters {
        Ok(parameters) => {
            println!("Current parameters");
            for parameter in parameters {
                println!("\t{parameter}");
            }
        }
        Err(error) => warnings.push("Could not find cluster parameters", error),
    }
}

fn prompt_number_or_default(warnings: &mut Warnings, name: &str, default: u8) ->
 u8 {
    let input = inquire::Text::new(format!("Updated {name}:").as_str())
        .with_validator(U8Validator {})
        .prompt();

    match input {
        Ok(increment) => match increment.parse::<u8>() {
            Ok(increment) => increment,
            Err(error) => {
                warnings.push(
                    format!("Invalid updated {name} (using {default}
 instead)").as_str(),
                    ScenarioError::with(format!("{error}")),
                );
                default
            }
        },
        Err(error) => {
            warnings.push(
                format!("Invalid updated {name} (using {default}
 instead)").as_str(),
                ScenarioError::with(format!("{error}")),
            );
            default
        }
    }
}
```

A wrapper around the Amazon RDS service that allows automocking for tests.

```
use aws_sdk_rds::{
    error::SdkError,
    operation::{
        create_db_cluster::{CreateDBClusterError, CreateDbClusterOutput},
        create_db_cluster_parameter_group::CreateDBClusterParameterGroupError,
        create_db_cluster_parameter_group::CreateDbClusterParameterGroupOutput,
        create_db_cluster_snapshot::{CreateDBClusterSnapshotError,
 CreateDbClusterSnapshotOutput},
        create_db_instance::{CreateDBInstanceError, CreateDbInstanceOutput},
        delete_db_cluster::{DeleteDBClusterError, DeleteDbClusterOutput},
        delete_db_cluster_parameter_group::{
            DeleteDBClusterParameterGroupError,
 DeleteDbClusterParameterGroupOutput,
        },
        delete_db_instance::{DeleteDBInstanceError, DeleteDbInstanceOutput},
        describe_db_cluster_endpoints::{
            DescribeDBClusterEndpointsError, DescribeDbClusterEndpointsOutput,
        },
        describe_db_cluster_parameters::{
            DescribeDBClusterParametersError, DescribeDbClusterParametersOutput,
        },
        describe_db_clusters::{DescribeDBClustersError,
 DescribeDbClustersOutput},
        describe_db_engine_versions::{
            DescribeDBEngineVersionsError, DescribeDbEngineVersionsOutput,
        },
        describe_db_instances::{DescribeDBInstancesError,
 DescribeDbInstancesOutput},

 describe_orderable_db_instance_options::DescribeOrderableDBInstanceOptionsError,
        modify_db_cluster_parameter_group::{
            ModifyDBClusterParameterGroupError,
 ModifyDbClusterParameterGroupOutput,
        },
    },
    types::{OrderableDbInstanceOption, Parameter},
    Client as RdsClient,
};
```

```
use secrecy::{ExposeSecret, SecretString};

#[cfg(test)]
use mockall::automock;

#[cfg(test)]
pub use MockRdsImpl as Rds;
#[cfg(not(test))]
pub use RdsImpl as Rds;

pub struct RdsImpl {
    pub inner: RdsClient,
}

#[cfg_attr(test, automock)]
impl RdsImpl {
    pub fn new(inner: RdsClient) -> Self {
        RdsImpl { inner }
    }

    pub async fn describe_db_engine_versions(
        &self,
        engine: &str,
    ) -> Result<DescribeDbEngineVersionsOutput,
 SdkError<DescribeDBEngineVersionsError>> {
        self.inner
            .describe_db_engine_versions()
            .engine(engine)
            .send()
            .await
    }

    pub async fn describe_orderable_db_instance_options(
        &self,
        engine: &str,
        engine_version: &str,
    ) -> Result<Vec<OrderableDbInstanceOption>,
 SdkError<DescribeOrderableDBInstanceOptionsError>>
    {
        self.inner
            .describe_orderable_db_instance_options()
            .engine(engine)
            .engine_version(engine_version)
            .into_paginator()
```

```
            .items()
            .send()
            .try_collect()
            .await
    }

    pub async fn create_db_cluster_parameter_group(
        &self,
        name: &str,
        description: &str,
        family: &str,
    ) -> Result<CreateDbClusterParameterGroupOutput,
SdkError<CreateDBClusterParameterGroupError>>
    {
        self.inner
            .create_db_cluster_parameter_group()
            .db_cluster_parameter_group_name(name)
            .description(description)
            .db_parameter_group_family(family)
            .send()
            .await
    }

    pub async fn describe_db_clusters(
        &self,
        id: &str,
    ) -> Result<DescribeDbClustersOutput, SdkError<DescribeDBClustersError>> {
        self.inner
            .describe_db_clusters()
            .db_cluster_identifier(id)
            .send()
            .await
    }

    pub async fn describe_db_cluster_parameters(
        &self,
        name: &str,
    ) -> Result<Vec<DescribeDbClusterParametersOutput>,
SdkError<DescribeDBClusterParametersError>>
    {
        self.inner
            .describe_db_cluster_parameters()
            .db_cluster_parameter_group_name(name)
            .into_paginator()
```

```
            .send()
            .try_collect()
            .await
    }

    pub async fn modify_db_cluster_parameter_group(
        &self,
        name: &str,
        parameters: Vec<Parameter>,
    ) -> Result<ModifyDbClusterParameterGroupOutput,
SdkError<ModifyDBClusterParameterGroupError>>
    {
        self.inner
            .modify_db_cluster_parameter_group()
            .db_cluster_parameter_group_name(name)
            .set_parameters(Some(parameters))
            .send()
            .await
    }

    pub async fn create_db_cluster(
        &self,
        name: &str,
        parameter_group: &str,
        engine: &str,
        version: &str,
        username: &str,
        password: SecretString,
    ) -> Result<CreateDbClusterOutput, SdkError<CreateDBClusterError>> {
        self.inner
            .create_db_cluster()
            .db_cluster_identifier(name)
            .db_cluster_parameter_group_name(parameter_group)
            .engine(engine)
            .engine_version(version)
            .master_username(username)
            .master_user_password(password.expose_secret())
            .send()
            .await
    }

    pub async fn create_db_instance(
        &self,
        cluster_name: &str,
```

```
        instance_name: &str,
        instance_class: &str,
        engine: &str,
    ) -> Result<CreateDbInstanceOutput, SdkError<CreateDBInstanceError>> {
        self.inner
            .create_db_instance()
            .db_cluster_identifier(cluster_name)
            .db_instance_identifier(instance_name)
            .db_instance_class(instance_class)
            .engine(engine)
            .send()
            .await
    }

    pub async fn describe_db_instance(
        &self,
        instance_identifier: &str,
    ) -> Result<DescribeDbInstancesOutput, SdkError<DescribeDBInstancesError>> {
        self.inner
            .describe_db_instances()
            .db_instance_identifier(instance_identifier)
            .send()
            .await
    }

    pub async fn snapshot_cluster(
        &self,
        db_cluster_identifier: &str,
        snapshot_name: &str,
    ) -> Result<CreateDbClusterSnapshotOutput,
SdkError<CreateDBClusterSnapshotError>> {
        self.inner
            .create_db_cluster_snapshot()
            .db_cluster_identifier(db_cluster_identifier)
            .db_cluster_snapshot_identifier(snapshot_name)
            .send()
            .await
    }

    pub async fn describe_db_instances(
        &self,
    ) -> Result<DescribeDbInstancesOutput, SdkError<DescribeDBInstancesError>> {
        self.inner.describe_db_instances().send().await
    }
```

```
    pub async fn describe_db_cluster_endpoints(
        &self,
        cluster_identifier: &str,
    ) -> Result<DescribeDbClusterEndpointsOutput,
SdkError<DescribeDBClusterEndpointsError>> {
        self.inner
            .describe_db_cluster_endpoints()
            .db_cluster_identifier(cluster_identifier)
            .send()
            .await
    }

    pub async fn delete_db_instance(
        &self,
        instance_identifier: &str,
    ) -> Result<DeleteDbInstanceOutput, SdkError<DeleteDBInstanceError>> {
        self.inner
            .delete_db_instance()
            .db_instance_identifier(instance_identifier)
            .skip_final_snapshot(true)
            .send()
            .await
    }

    pub async fn delete_db_cluster(
        &self,
        cluster_identifier: &str,
    ) -> Result<DeleteDbClusterOutput, SdkError<DeleteDBClusterError>> {
        self.inner
            .delete_db_cluster()
            .db_cluster_identifier(cluster_identifier)
            .skip_final_snapshot(true)
            .send()
            .await
    }

    pub async fn delete_db_cluster_parameter_group(
        &self,
        name: &str,
    ) -> Result<DeleteDbClusterParameterGroupOutput,
SdkError<DeleteDBClusterParameterGroupError>>
    {
        self.inner
```

```
            .delete_db_cluster_parameter_group()
            .db_cluster_parameter_group_name(name)
            .send()
            .await
    }
}
```

The Cargo.toml with dependencies used in this scenario.

```
[package]
name = "aurora-code-examples"
authors = [
  "David Souther <dpsouth@amazon.com>",
]
edition = "2021"
version = "0.1.0"

# See more keys and their definitions at https://doc.rust-lang.org/cargo/
reference/manifest.html

[dependencies]
anyhow = "1.0.75"
assert_matches = "1.5.0"
aws-config = { version = "1.0.1", features = ["behavior-version-latest"] }
aws-smithy-types = { version = "1.0.1" }
aws-smithy-runtime-api = { version = "1.0.1" }
aws-sdk-rds = { version = "1.3.0" }
inquire = "0.6.2"
mockall = "0.11.4"
phf = { version = "0.11.2", features = ["std", "macros"] }
sdk-examples-test-utils = { path = "../../test-utils" }
secrecy = "0.8.0"
tokio = { version = "1.20.1", features = ["full", "test-util"] }
tracing = "0.1.37"
tracing-subscriber = { version = "0.3.15", features = ["env-filter"] }
```

- For API details, see the following topics in *Amazon SDK for Rust API reference*.
  - CreateDBCluster
  - CreateDBClusterParameterGroup
  - CreateDBClusterSnapshot

- CreateDBInstance
- DeleteDBCluster
- DeleteDBClusterParameterGroup
- DeleteDBInstance
- DescribeDBClusterParameterGroups
- DescribeDBClusterParameters
- DescribeDBClusterSnapshots
- DescribeDBClusters
- DescribeDBEngineVersions
- DescribeDBInstances
- DescribeOrderableDBInstanceOptions
- ModifyDBClusterParameterGroup

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Actions for Aurora using Amazon SDKs

The following code examples demonstrate how to perform individual Aurora actions with Amazon SDKs. Each example includes a link to GitHub, where you can find instructions for setting up and running the code.

These excerpts call the Aurora API and are code excerpts from larger programs that must be run in context. You can see actions in context in Scenarios for Aurora using Amazon SDKs.

The following examples include only the most commonly used actions. For a complete list, see the Amazon Aurora API Reference.

Examples

- Use CreateDBCluster with an Amazon SDK
- Use CreateDBClusterParameterGroup with an Amazon SDK
- Use CreateDBClusterSnapshot with an Amazon SDK
- Use CreateDBInstance with an Amazon SDK
- Use DeleteDBCluster with an Amazon SDK

- Use DeleteDBClusterParameterGroup with an Amazon SDK
- Use DeleteDBInstance with an Amazon SDK
- Use DescribeDBClusterParameterGroups with an Amazon SDK
- Use DescribeDBClusterParameters with an Amazon SDK
- Use DescribeDBClusterSnapshots with an Amazon SDK
- Use DescribeDBClusters with an Amazon SDK
- Use DescribeDBEngineVersions with an Amazon SDK
- Use DescribeDBInstances with an Amazon SDK
- Use DescribeOrderableDBInstanceOptions with an Amazon SDK or CLI
- Use ModifyDBClusterParameterGroup with an Amazon SDK

Use `CreateDBCluster` with an Amazon SDK

The following code examples show how to use `CreateDBCluster`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
/// <summary>
/// Create a new cluster and database.
/// </summary>
/// <param name="dbName">The name of the new database.</param>
/// <param name="clusterIdentifier">The identifier of the cluster.</param>
/// <param name="parameterGroupName">The name of the parameter group.</param>
/// <param name="dbEngine">The engine to use for the new cluster.</param>
```

```
    /// <param name="dbEngineVersion">The version of the engine to use.</param>
    /// <param name="adminName">The admin username.</param>
    /// <param name="adminPassword">The primary admin password.</param>
    /// <returns>The cluster object.</returns>
    public async Task<DBCluster> CreateDBClusterWithAdminAsync(
        string dbName,
        string clusterIdentifier,
        string parameterGroupName,
        string dbEngine,
        string dbEngineVersion,
        string adminName,
        string adminPassword)
    {
        var request = new CreateDBClusterRequest
        {
            DatabaseName = dbName,
            DBClusterIdentifier = clusterIdentifier,
            DBClusterParameterGroupName = parameterGroupName,
            Engine = dbEngine,
            EngineVersion = dbEngineVersion,
            MasterUsername = adminName,
            MasterUserPassword = adminPassword,
        };

        var response = await _amazonRDS.CreateDBClusterAsync(request);
        return response.DBCluster;
    }
```

- For API details, see CreateDBCluster in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
```

```
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);

        Aws::RDS::Model::CreateDBClusterRequest request;
        request.SetDBClusterIdentifier(DB_CLUSTER_IDENTIFIER);
        request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);
        request.SetEngine(engineName);
        request.SetEngineVersion(engineVersionName);
        request.SetMasterUsername(administratorName);
        request.SetMasterUserPassword(administratorPassword);

        Aws::RDS::Model::CreateDBClusterOutcome outcome =
                client.CreateDBCluster(request);

        if (outcome.IsSuccess()) {
            std::cout << "The DB cluster creation has started."
                      << std::endl;
        }
        else {
            std::cerr << "Error with Aurora::CreateDBCluster. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, "", "", client);
            return false;
        }
```

- For API details, see CreateDBCluster in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// CreateDbCluster creates a DB cluster that is configured to use the specified
 parameter group.
// The newly created DB cluster contains a database that uses the specified
 engine and
// engine version.
func (clusters *DbClusters) CreateDbCluster(ctx context.Context, clusterName
 string, parameterGroupName string,
 dbName string, dbEngine string, dbEngineVersion string, adminName string,
 adminPassword string) (
 *types.DBCluster, error) {

 output, err := clusters.AuroraClient.CreateDBCluster(ctx,
 &rds.CreateDBClusterInput{
  DBClusterIdentifier:         aws.String(clusterName),
  Engine:                      aws.String(dbEngine),
  DBClusterParameterGroupName: aws.String(parameterGroupName),
  DatabaseName:                aws.String(dbName),
  EngineVersion:               aws.String(dbEngineVersion),
  MasterUserPassword:          aws.String(adminPassword),
  MasterUsername:              aws.String(adminName),
 })
 if err != nil {
  log.Printf("Couldn't create DB cluster %v: %v\n", clusterName, err)
  return nil, err
 } else {
  return output.DBCluster, err
 }
}
```

- For API details, see CreateDBCluster in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static String createDBCluster(RdsClient rdsClient, String
dbParameterGroupFamily, String dbName,
            String dbClusterIdentifier, String userName, String password) {
       try {
           CreateDbClusterRequest clusterRequest =
CreateDbClusterRequest.builder()
                   .databaseName(dbName)
                   .dbClusterIdentifier(dbClusterIdentifier)
                   .dbClusterParameterGroupName(dbParameterGroupFamily)
                   .engine("aurora-mysql")
                   .masterUsername(userName)
                   .masterUserPassword(password)
                   .build();

           CreateDbClusterResponse response =
rdsClient.createDBCluster(clusterRequest);
           return response.dbCluster().dbClusterArn();

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
       return "";
   }
```

- For API details, see CreateDBCluster in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun createDBCluster(
    dbParameterGroupFamilyVal: String?,
    dbName: String?,
    dbClusterIdentifierVal: String?,
    userName: String?,
    password: String?,
): String? {
    val clusterRequest =
        CreateDbClusterRequest {
            databaseName = dbName
            dbClusterIdentifier = dbClusterIdentifierVal
            dbClusterParameterGroupName = dbParameterGroupFamilyVal
            engine = "aurora-mysql"
            masterUsername = userName
            masterUserPassword = password
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.createDbCluster(clusterRequest)
        return response.dbCluster?.dbClusterArn
    }
}
```

- For API details, see CreateDBCluster in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def create_db_cluster(
        self,
        cluster_name,
        parameter_group_name,
        db_name,
        db_engine,
        db_engine_version,
        admin_name,
        admin_password,
    ):
        """
        Creates a DB cluster that is configured to use the specified parameter
 group.
```

```
        The newly created DB cluster contains a database that uses the specified
engine and
        engine version.

        :param cluster_name: The name of the DB cluster to create.
        :param parameter_group_name: The name of the parameter group to associate
with
                                     the DB cluster.
        :param db_name: The name of the database to create.
        :param db_engine: The database engine of the database that is created,
such as MySql.
        :param db_engine_version: The version of the database engine.
        :param admin_name: The user name of the database administrator.
        :param admin_password: The password of the database administrator.
        :return: The newly created DB cluster.
        """
        try:
            response = self.rds_client.create_db_cluster(
                DatabaseName=db_name,
                DBClusterIdentifier=cluster_name,
                DBClusterParameterGroupName=parameter_group_name,
                Engine=db_engine,
                EngineVersion=db_engine_version,
                MasterUsername=admin_name,
                MasterUserPassword=admin_password,
            )
            cluster = response["DBCluster"]
        except ClientError as err:
            logger.error(
                "Couldn't create database %s. Here's why: %s: %s",
                db_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return cluster
```

- For API details, see CreateDBCluster in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   // Get a list of allowed engine versions.
rds.DescribeDbEngineVersions(Engine='aurora-mysql', DBParameterGroupFamily=<the
family used to create your parameter group in step 2>)
   // Create an Aurora DB cluster database cluster that contains a MySql
database and uses the parameter group you created.
   // Wait for DB cluster to be ready. Call rds.DescribeDBClusters and check for
Status == 'available'.
   // Get a list of instance classes available for the selected engine
and engine version. rds.DescribeOrderableDbInstanceOptions(Engine='mysql',
EngineVersion=).

   // Create a database instance in the cluster.
   // Wait for DB instance to be ready. Call rds.DescribeDbInstances and check
for DBInstanceStatus == 'available'.
   pub async fn start_cluster_and_instance(&mut self) -> Result<(),
ScenarioError> {
       if self.password.is_none() {
           return Err(ScenarioError::with(
               "Must set Secret Password before starting a cluster",
           ));
       }
       let create_db_cluster = self
           .rds
           .create_db_cluster(
               DB_CLUSTER_IDENTIFIER,
               DB_CLUSTER_PARAMETER_GROUP_NAME,
               DB_ENGINE,
               self.engine_version.as_deref().expect("engine version"),
               self.username.as_deref().expect("username"),
               self.password
                   .replace(SecretString::new("".to_string()))
                   .expect("password"),
```

```
            )
            .await;
        if let Err(err) = create_db_cluster {
            return Err(ScenarioError::new(
                "Failed to create DB Cluster with cluster group",
                &err,
            ));
        }

        self.db_cluster_identifier = create_db_cluster
            .unwrap()
            .db_cluster
            .and_then(|c| c.db_cluster_identifier);

        if self.db_cluster_identifier.is_none() {
            return Err(ScenarioError::with("Created DB Cluster missing
Identifier"));
        }

        info!(
            "Started a db cluster: {}",
            self.db_cluster_identifier
                .as_deref()
                .unwrap_or("Missing ARN")
        );

        let create_db_instance = self
            .rds
            .create_db_instance(
                self.db_cluster_identifier.as_deref().expect("cluster name"),
                DB_INSTANCE_IDENTIFIER,
                self.instance_class.as_deref().expect("instance class"),
                DB_ENGINE,
            )
            .await;
        if let Err(err) = create_db_instance {
            return Err(ScenarioError::new(
                "Failed to create Instance in DB Cluster",
                &err,
            ));
        }

        self.db_instance_identifier = create_db_instance
            .unwrap()
```

```
            .db_instance
            .and_then(|i| i.db_instance_identifier);

        // Cluster creation can take up to 20 minutes to become available
        let cluster_max_wait = Duration::from_secs(20 * 60);
        let waiter = Waiter::builder().max(cluster_max_wait).build();
        while waiter.sleep().await.is_ok() {
            let cluster = self
                .rds
                .describe_db_clusters(
                    self.db_cluster_identifier
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = cluster {
                warn!(?err, "Failed to describe cluster while waiting for
ready");
                continue;
            }

            let instance = self
                .rds
                .describe_db_instance(
                    self.db_instance_identifier
                        .as_deref()
                        .expect("instance identifier"),
                )
                .await;
            if let Err(err) = instance {
                return Err(ScenarioError::new(
                    "Failed to find instance for cluster",
                    &err,
                ));
            }

            let instances_available = instance
                .unwrap()
                .db_instances()
                .iter()
                .all(|instance| instance.db_instance_status() ==
Some("Available"));
```

```
            let endpoints = self
                .rds
                .describe_db_cluster_endpoints(
                    self.db_cluster_identifier
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = endpoints {
                return Err(ScenarioError::new(
                    "Failed to find endpoint for cluster",
                    &err,
                ));
            }

            let endpoints_available = endpoints
                .unwrap()
                .db_cluster_endpoints()
                .iter()
                .all(|endpoint| endpoint.status() == Some("available"));

            if instances_available && endpoints_available {
                return Ok(());
            }
        }

        Err(ScenarioError::with("timed out waiting for cluster"))
    }

    pub async fn create_db_cluster(
        &self,
        name: &str,
        parameter_group: &str,
        engine: &str,
        version: &str,
        username: &str,
        password: SecretString,
    ) -> Result<CreateDbClusterOutput, SdkError<CreateDBClusterError>> {
        self.inner
            .create_db_cluster()
            .db_cluster_identifier(name)
            .db_cluster_parameter_group_name(parameter_group)
            .engine(engine)
```

```
            .engine_version(version)
            .master_username(username)
            .master_user_password(password.expose_secret())
            .send()
            .await
    }

#[tokio::test]
async fn test_start_cluster_and_instance() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
```

```
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_describe_db_instance()
        .with(eq("RustSDKCodeExamplesDBInstance"))
        .return_once(|name| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_instance_identifier(name)
                        .db_instance_status("Available")
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

.db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
```

```
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
        assert!(scenario
            .password
            .replace(SecretString::new("BAD SECRET".into()))
            .unwrap()
            .expose_secret()
            .is_empty());
        assert_eq!(
            scenario.db_cluster_identifier,
            Some("RustSDKCodeExamplesDBCluster".into())
        );
    });
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Err(SdkError::service_error(
                CreateDBClusterError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db cluster error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));
```

```
    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _}) if message
 == "Failed to create DB Cluster with cluster group")
}

#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_missing_id() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()
                .db_cluster(DbCluster::builder().build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context:_ }) if message
 == "Created DB Cluster missing Identifier");
}

#[tokio::test]
async fn test_start_cluster_and_instance_instance_create_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
```

```
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .return_once(|_, _, _, _| {
            Err(SdkError::service_error(
                CreateDBInstanceError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db instance error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _ }) if message
 == "Failed to create Instance in DB Cluster")
}

#[tokio::test]
async fn test_start_cluster_and_instance_wait_hiccup() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
```

```
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

.db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe cluster error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        })
```

```
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds.expect_describe_db_instance().return_once(|name| {
        Ok(DescribeDbInstancesOutput::builder()
            .db_instances(
                DbInstance::builder()
                    .db_instance_identifier(name)
                    .db_instance_status("Available")
                    .build(),
            )
            .build())
    });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

.db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
    });

    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
```

```
    let _ = assertions.await;
}
```

- For API details, see CreateDBCluster in *Amazon SDK for Rust API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `CreateDBClusterParameterGroup` with an Amazon SDK

The following code examples show how to use `CreateDBClusterParameterGroup`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Create a custom cluster parameter group.
    /// </summary>
    /// <param name="parameterGroupFamily">The family of the parameter group.</
param>
    /// <param name="groupName">The name for the new parameter group.</param>
    /// <param name="description">A description for the new parameter group.</
param>
    /// <returns>The new parameter group object.</returns>
    public async Task<DBClusterParameterGroup>
 CreateCustomClusterParameterGroupAsync(
```

```
        string parameterGroupFamily,
        string groupName,
        string description)
    {
        var request = new CreateDBClusterParameterGroupRequest
        {
            DBParameterGroupFamily = parameterGroupFamily,
            DBClusterParameterGroupName = groupName,
            Description = description,
        };

        var response = await
_amazonRDS.CreateDBClusterParameterGroupAsync(request);
        return response.DBClusterParameterGroup;
    }
```

- For API details, see CreateDBClusterParameterGroup in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);

        Aws::RDS::Model::CreateDBClusterParameterGroupRequest request;
        request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);
        request.SetDBParameterGroupFamily(dbParameterGroupFamily);
        request.SetDescription("Example cluster parameter group.");
```

```
        Aws::RDS::Model::CreateDBClusterParameterGroupOutcome outcome =
                client.CreateDBClusterParameterGroup(request);

        if (outcome.IsSuccess()) {
            std::cout << "The DB cluster parameter group was successfully
 created."
                      << std::endl;
        }
        else {
            std::cerr << "Error with Aurora::CreateDBClusterParameterGroup. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            return false;
        }
```

- For API details, see CreateDBClusterParameterGroup in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}
```

```
// CreateParameterGroup creates a DB cluster parameter group that is based on the
 specified
// parameter group family.
func (clusters *DbClusters) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBClusterParameterGroup, error) {

 output, err := clusters.AuroraClient.CreateDBClusterParameterGroup(ctx,
  &rds.CreateDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   DBParameterGroupFamily:      aws.String(parameterGroupFamily),
   Description:                 aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
  return output.DBClusterParameterGroup, err
 }
}
```

- For API details, see CreateDBClusterParameterGroup in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void createDBClusterParameterGroup(RdsClient rdsClient, String
dbClusterGroupName,
           String dbParameterGroupFamily) {
```

```
        try {
            CreateDbClusterParameterGroupRequest groupRequest =
 CreateDbClusterParameterGroupRequest.builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .dbParameterGroupFamily(dbParameterGroupFamily)
                    .description("Created by using the AWS SDK for Java")
                    .build();

            CreateDbClusterParameterGroupResponse response =
 rdsClient.createDBClusterParameterGroup(groupRequest);
            System.out.println("The group name is " +
 response.dbClusterParameterGroup().dbClusterParameterGroupName());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- For API details, see CreateDBClusterParameterGroup in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun createDBClusterParameterGroup(
    dbClusterGroupNameVal: String?,
    dbParameterGroupFamilyVal: String?,
) {
    val groupRequest =
        CreateDbClusterParameterGroupRequest {
            dbClusterParameterGroupName = dbClusterGroupNameVal
            dbParameterGroupFamily = dbParameterGroupFamilyVal
```

```
            description = "Created by using the AWS SDK for Kotlin"
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.createDbClusterParameterGroup(groupRequest)
        println("The group name is
 ${response.dbClusterParameterGroup?.dbClusterParameterGroupName}")
    }
}
```

- For API details, see CreateDBClusterParameterGroup in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)
```

```
    def create_parameter_group(
        self, parameter_group_name, parameter_group_family, description
    ):
        """
        Creates a DB cluster parameter group that is based on the specified
parameter group
        family.

        :param parameter_group_name: The name of the newly created parameter
group.
        :param parameter_group_family: The family that is used as the basis of
the new
                                       parameter group.
        :param description: A description given to the parameter group.
        :return: Data about the newly created parameter group.
        """
        try:
            response = self.rds_client.create_db_cluster_parameter_group(
                DBClusterParameterGroupName=parameter_group_name,
                DBParameterGroupFamily=parameter_group_family,
                Description=description,
            )
        except ClientError as err:
            logger.error(
                "Couldn't create parameter group %s. Here's why: %s: %s",
                parameter_group_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return response
```

- For API details, see [CreateDBClusterParameterGroup](#) in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   // Select an engine family and create a custom DB cluster parameter group.
rds.CreateDbClusterParameterGroup(DBParameterGroupFamily='aurora-mysql8.0')
   pub async fn set_engine(&mut self, engine: &str, version: &str) -> Result<(),
ScenarioError> {
       self.engine_family = Some(engine.to_string());
       self.engine_version = Some(version.to_string());
       let create_db_cluster_parameter_group = self
           .rds
           .create_db_cluster_parameter_group(
               DB_CLUSTER_PARAMETER_GROUP_NAME,
               DB_CLUSTER_PARAMETER_GROUP_DESCRIPTION,
               engine,
           )
           .await;

       match create_db_cluster_parameter_group {
           Ok(CreateDbClusterParameterGroupOutput {
               db_cluster_parameter_group: None,
               ..
           }) => {
               return Err(ScenarioError::with(
                   "CreateDBClusterParameterGroup had empty response",
               ));
           }
           Err(error) => {
               if error.code() == Some("DBParameterGroupAlreadyExists") {
                   info!("Cluster Parameter Group already exists, nothing to
do");
               } else {
                   return Err(ScenarioError::new(
                       "Could not create Cluster Parameter Group",
                       &error,
```

```
                    ));
                }
            }
            _ => {
                info!("Created Cluster Parameter Group");
            }
        }

        Ok(())
    }

    pub async fn create_db_cluster_parameter_group(
        &self,
        name: &str,
        description: &str,
        family: &str,
    ) -> Result<CreateDbClusterParameterGroupOutput,
 SdkError<CreateDBClusterParameterGroupError>>
    {
        self.inner
            .create_db_cluster_parameter_group()
            .db_cluster_parameter_group_name(name)
            .description(description)
            .db_parameter_group_family(family)
            .send()
            .await
    }

#[tokio::test]
async fn test_scenario_set_engine() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .with(
            eq("RustSDKCodeExamplesDBParameterGroup"),
            eq("Parameter Group created by Rust SDK Code Example"),
            eq("aurora-mysql"),
        )
        .return_once(|_, _, _| {
            Ok(CreateDbClusterParameterGroupOutput::builder()

 .db_cluster_parameter_group(DbClusterParameterGroup::builder().build())
                .build())
```

```
        });

    let mut scenario = AuroraScenario::new(mock_rds);

    let set_engine = scenario.set_engine("aurora-mysql", "aurora-
mysql8.0").await;

    assert_eq!(set_engine, Ok(()));
    assert_eq!(Some("aurora-mysql"), scenario.engine_family.as_deref());
    assert_eq!(Some("aurora-mysql8.0"), scenario.engine_version.as_deref());
}

#[tokio::test]
async fn test_scenario_set_engine_not_create() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .with(
            eq("RustSDKCodeExamplesDBParameterGroup"),
            eq("Parameter Group created by Rust SDK Code Example"),
            eq("aurora-mysql"),
        )
        .return_once(|_, _, _|
 Ok(CreateDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);

    let set_engine = scenario.set_engine("aurora-mysql", "aurora-
mysql8.0").await;

    assert!(set_engine.is_err());
}

#[tokio::test]
async fn test_scenario_set_engine_param_group_exists() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .withf(|_, _, _| true)
        .return_once(|_, _, _| {
            Err(SdkError::service_error(
```

```
 CreateDBClusterParameterGroupError::DbParameterGroupAlreadyExistsFault(
                    DbParameterGroupAlreadyExistsFault::builder().build(),
                ),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);

    let set_engine = scenario.set_engine("aurora-mysql", "aurora-
mysql8.0").await;

    assert!(set_engine.is_err());
}
```

- For API details, see CreateDBClusterParameterGroup in *Amazon SDK for Rust API reference*.

SAP ABAP

SDK for SAP ABAP

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    TRY.
        DATA(lo_output) = lo_rds->createdbclusterparamgroup(
          iv_dbclusterparamgroupname = iv_param_group_name
          iv_dbparametergroupfamily = iv_param_group_family
          iv_description = iv_description
        ).
        oo_result = lo_output->get_dbclusterparametergroup( ).
      CATCH /aws1/cx_rdsdbparmgralrexfault.
        " Re-raise exception - parameter group already exists
        RAISE EXCEPTION TYPE /aws1/cx_rdsdbparmgralrexfault.
      CATCH /aws1/cx_rdsdbprmgrquotaexcd00.
        " Re-raise exception - quota exceeded
```

```
        RAISE EXCEPTION TYPE /aws1/cx_rdsdbprmgrquotaexcd00.
    ENDTRY.
```

- For API details, see CreateDBClusterParameterGroup in *Amazon SDK for SAP ABAP API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `CreateDBClusterSnapshot` with an Amazon SDK

The following code examples show how to use `CreateDBClusterSnapshot`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Create a snapshot of a cluster.
    /// </summary>
    /// <param name="dbClusterIdentifier">DB cluster identifier.</param>
    /// <param name="snapshotIdentifier">Identifier for the snapshot.</param>
    /// <returns>DB snapshot object.</returns>
    public async Task<DBClusterSnapshot>
CreateClusterSnapshotByIdentifierAsync(string dbClusterIdentifier, string
snapshotIdentifier)
```

```
    {
        var response = await _amazonRDS.CreateDBClusterSnapshotAsync(
            new CreateDBClusterSnapshotRequest()
            {
                DBClusterIdentifier = dbClusterIdentifier,
                DBClusterSnapshotIdentifier = snapshotIdentifier,
            });

        return response.DBClusterSnapshot;
    }
```

- For API details, see CreateDBClusterSnapshot in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    Aws::Client::ClientConfiguration clientConfig;
    // Optional: Set to the AWS Region (overrides config file).
    // clientConfig.region = "us-east-1";

Aws::RDS::RDSClient client(clientConfig);

        Aws::RDS::Model::CreateDBClusterSnapshotRequest request;
        request.SetDBClusterIdentifier(DB_CLUSTER_IDENTIFIER);
        request.SetDBClusterSnapshotIdentifier(snapshotID);

        Aws::RDS::Model::CreateDBClusterSnapshotOutcome outcome =
                client.CreateDBClusterSnapshot(request);

        if (outcome.IsSuccess()) {
            std::cout << "Snapshot creation has started."
                      << std::endl;
        }
        else {
```

```
                std::cerr << "Error with Aurora::CreateDBClusterSnapshot. "
                          << outcome.GetError().GetMessage()
                          << std::endl;
                cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                                 DB_CLUSTER_IDENTIFIER, DB_INSTANCE_IDENTIFIER,
 client);
                return false;
            }
```

- For API details, see CreateDBClusterSnapshot in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// CreateClusterSnapshot creates a snapshot of a DB cluster.
func (clusters *DbClusters) CreateClusterSnapshot(ctx context.Context,
 clusterName string, snapshotName string) (
```

```
 *types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.CreateDBClusterSnapshot(ctx,
 &rds.CreateDBClusterSnapshotInput{
  DBClusterIdentifier:         aws.String(clusterName),
  DBClusterSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return output.DBClusterSnapshot, nil
 }
}
```

- For API details, see CreateDBClusterSnapshot in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void createDBClusterSnapshot(RdsClient rdsClient, String
dbInstanceClusterIdentifier,
           String dbSnapshotIdentifier) {
       try {
           CreateDbClusterSnapshotRequest snapshotRequest =
CreateDbClusterSnapshotRequest.builder()
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                   .build();

           CreateDbClusterSnapshotResponse response =
rdsClient.createDBClusterSnapshot(snapshotRequest);
           System.out.println("The Snapshot ARN is " +
response.dbClusterSnapshot().dbClusterSnapshotArn());
```

```
        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- For API details, see CreateDBClusterSnapshot in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun createDBClusterSnapshot(
    dbInstanceClusterIdentifier: String?,
    dbSnapshotIdentifier: String?,
) {
    val snapshotRequest =
        CreateDbClusterSnapshotRequest {
            dbClusterIdentifier = dbInstanceClusterIdentifier
            dbClusterSnapshotIdentifier = dbSnapshotIdentifier
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.createDbClusterSnapshot(snapshotRequest)
        println("The Snapshot ARN is
 ${response.dbClusterSnapshot?.dbClusterSnapshotArn}")
    }
}
```

- For API details, see CreateDBClusterSnapshot in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def create_cluster_snapshot(self, snapshot_id, cluster_id):
        """
        Creates a snapshot of a DB cluster.

        :param snapshot_id: The ID to give the created snapshot.
        :param cluster_id: The DB cluster to snapshot.
        :return: Data about the newly created snapshot.
        """
        try:
            response = self.rds_client.create_db_cluster_snapshot(
                DBClusterSnapshotIdentifier=snapshot_id,
 DBClusterIdentifier=cluster_id
            )
```

```
            snapshot = response["DBClusterSnapshot"]
        except ClientError as err:
            logger.error(
                "Couldn't create snapshot of %s. Here's why: %s: %s",
                cluster_id,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return snapshot
```

- For API details, see CreateDBClusterSnapshot in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   // Get a list of allowed engine versions.
rds.DescribeDbEngineVersions(Engine='aurora-mysql', DBParameterGroupFamily=<the
family used to create your parameter group in step 2>)
   // Create an Aurora DB cluster database cluster that contains a MySql
database and uses the parameter group you created.
   // Wait for DB cluster to be ready. Call rds.DescribeDBClusters and check for
Status == 'available'.
   // Get a list of instance classes available for the selected engine
and engine version. rds.DescribeOrderableDbInstanceOptions(Engine='mysql',
EngineVersion=).

   // Create a database instance in the cluster.
   // Wait for DB instance to be ready. Call rds.DescribeDbInstances and check
for DBInstanceStatus == 'available'.
```

```
   pub async fn start_cluster_and_instance(&mut self) -> Result<(),
ScenarioError> {
       if self.password.is_none() {
           return Err(ScenarioError::with(
               "Must set Secret Password before starting a cluster",
           ));
       }
       let create_db_cluster = self
           .rds
           .create_db_cluster(
               DB_CLUSTER_IDENTIFIER,
               DB_CLUSTER_PARAMETER_GROUP_NAME,
               DB_ENGINE,
               self.engine_version.as_deref().expect("engine version"),
               self.username.as_deref().expect("username"),
               self.password
                   .replace(SecretString::new("".to_string()))
                   .expect("password"),
           )
           .await;
       if let Err(err) = create_db_cluster {
           return Err(ScenarioError::new(
               "Failed to create DB Cluster with cluster group",
               &err,
           ));
       }

       self.db_cluster_identifier = create_db_cluster
           .unwrap()
           .db_cluster
           .and_then(|c| c.db_cluster_identifier);

       if self.db_cluster_identifier.is_none() {
           return Err(ScenarioError::with("Created DB Cluster missing
Identifier"));
       }

       info!(
           "Started a db cluster: {}",
           self.db_cluster_identifier
               .as_deref()
               .unwrap_or("Missing ARN")
       );
```

```
        let create_db_instance = self
            .rds
            .create_db_instance(
                self.db_cluster_identifier.as_deref().expect("cluster name"),
                DB_INSTANCE_IDENTIFIER,
                self.instance_class.as_deref().expect("instance class"),
                DB_ENGINE,
            )
            .await;
        if let Err(err) = create_db_instance {
            return Err(ScenarioError::new(
                "Failed to create Instance in DB Cluster",
                &err,
            ));
        }

        self.db_instance_identifier = create_db_instance
            .unwrap()
            .db_instance
            .and_then(|i| i.db_instance_identifier);

        // Cluster creation can take up to 20 minutes to become available
        let cluster_max_wait = Duration::from_secs(20 * 60);
        let waiter = Waiter::builder().max(cluster_max_wait).build();
        while waiter.sleep().await.is_ok() {
            let cluster = self
                .rds
                .describe_db_clusters(
                    self.db_cluster_identifier
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = cluster {
                warn!(?err, "Failed to describe cluster while waiting for
ready");
                continue;
            }

            let instance = self
                .rds
                .describe_db_instance(
                    self.db_instance_identifier
```

```
                        .as_deref()
                        .expect("instance identifier"),
                )
                .await;
            if let Err(err) = instance {
                return Err(ScenarioError::new(
                    "Failed to find instance for cluster",
                    &err,
                ));
            }

            let instances_available = instance
                .unwrap()
                .db_instances()
                .iter()
                .all(|instance| instance.db_instance_status() ==
Some("Available"));

            let endpoints = self
                .rds
                .describe_db_cluster_endpoints(
                    self.db_cluster_identifier
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = endpoints {
                return Err(ScenarioError::new(
                    "Failed to find endpoint for cluster",
                    &err,
                ));
            }

            let endpoints_available = endpoints
                .unwrap()
                .db_cluster_endpoints()
                .iter()
                .all(|endpoint| endpoint.status() == Some("available"));

            if instances_available && endpoints_available {
                return Ok(());
            }
        }
```

```
        Err(ScenarioError::with("timed out waiting for cluster"))
    }

    pub async fn snapshot_cluster(
        &self,
        db_cluster_identifier: &str,
        snapshot_name: &str,
    ) -> Result<CreateDbClusterSnapshotOutput,
 SdkError<CreateDBClusterSnapshotError>> {
        self.inner
            .create_db_cluster_snapshot()
            .db_cluster_identifier(db_cluster_identifier)
            .db_cluster_snapshot_identifier(snapshot_name)
            .send()
            .await
    }

#[tokio::test]
async fn test_start_cluster_and_instance() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
```

```
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_describe_db_instance()
        .with(eq("RustSDKCodeExamplesDBInstance"))
        .return_once(|name| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_instance_identifier(name)
                        .db_instance_status("Available")
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .with(eq("RustSDKCodeExamplesDBCluster"))
```

```
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

 .db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
        assert!(scenario
            .password
            .replace(SecretString::new("BAD SECRET".into()))
            .unwrap()
            .expose_secret()
            .is_empty());
        assert_eq!(
            scenario.db_cluster_identifier,
            Some("RustSDKCodeExamplesDBCluster".into())
        );
    });
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Err(SdkError::service_error(
                CreateDBClusterError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db cluster error",
```

```
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _}) if message
 == "Failed to create DB Cluster with cluster group")
}

#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_missing_id() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()
                .db_cluster(DbCluster::builder().build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context:_ }) if message
 == "Created DB Cluster missing Identifier");
}

#[tokio::test]
async fn test_start_cluster_and_instance_instance_create_error() {
    let mut mock_rds = MockRdsImpl::default();
```

```
    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .return_once(|_, _, _, _| {
            Err(SdkError::service_error(
                CreateDBInstanceError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db instance error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _ }) if message
 == "Failed to create Instance in DB Cluster")
}

#[tokio::test]
async fn test_start_cluster_and_instance_wait_hiccup() {
```

```
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

.db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
```

```
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe cluster error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        })
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds.expect_describe_db_instance().return_once(|name| {
        Ok(DescribeDbInstancesOutput::builder()
            .db_instances(
                DbInstance::builder()
                    .db_instance_identifier(name)
                    .db_instance_status("Available")
                    .build(),
            )
            .build())
    });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

.db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
```

```
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
    });

    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
    let _ = assertions.await;
}
```

- For API details, see CreateDBClusterSnapshot in *Amazon SDK for Rust API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `CreateDBInstance` with an Amazon SDK

The following code examples show how to use `CreateDBInstance`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Create an Amazon Relational Database Service (Amazon RDS) DB instance
    /// with a particular set of properties. Use the action
DescribeDBInstancesAsync
    /// to determine when the DB instance is ready to use.
    /// </summary>
    /// <param name="dbInstanceIdentifier">DB instance identifier.</param>
    /// <param name="dbClusterIdentifier">DB cluster identifier.</param>
    /// <param name="dbEngine">The engine for the DB instance.</param>
    /// <param name="dbEngineVersion">Version for the DB instance.</param>
    /// <param name="instanceClass">Class for the DB instance.</param>
    /// <returns>DB instance object.</returns>
    public async Task<DBInstance> CreateDBInstanceInClusterAsync(
        string dbClusterIdentifier,
        string dbInstanceIdentifier,
        string dbEngine,
        string dbEngineVersion,
        string instanceClass)
    {
        // When creating the instance within a cluster, do not specify the name
or size.
        var response = await _amazonRDS.CreateDBInstanceAsync(
            new CreateDBInstanceRequest()
            {
                DBClusterIdentifier = dbClusterIdentifier,
                DBInstanceIdentifier = dbInstanceIdentifier,
                Engine = dbEngine,
                EngineVersion = dbEngineVersion,
                DBInstanceClass = instanceClass
            });

        return response.DBInstance;
    }
```

- For API details, see CreateDBInstance in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);

        Aws::RDS::Model::CreateDBInstanceRequest request;
        request.SetDBInstanceIdentifier(DB_INSTANCE_IDENTIFIER);
        request.SetDBClusterIdentifier(DB_CLUSTER_IDENTIFIER);
        request.SetEngine(engineName);
        request.SetDBInstanceClass(dbInstanceClass);

        Aws::RDS::Model::CreateDBInstanceOutcome outcome =
                client.CreateDBInstance(request);

        if (outcome.IsSuccess()) {
            std::cout << "The DB instance creation has started."
                      << std::endl;
        }
        else {
            std::cerr << "Error with RDS::CreateDBInstance. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME, DB_CLUSTER_IDENTIFIER,
"",
                             client);
            return false;
        }
```

- For API details, see CreateDBInstance in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// CreateInstanceInCluster creates a database instance in an existing DB cluster.
 The first database that is
// created defaults to a read-write DB instance.
func (clusters *DbClusters) CreateInstanceInCluster(ctx context.Context,
 clusterName string, instanceName string,
 dbEngine string, dbInstanceClass string) (*types.DBInstance, error) {
 output, err := clusters.AuroraClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBClusterIdentifier:  aws.String(clusterName),
  Engine:               aws.String(dbEngine),
  DBInstanceClass:      aws.String(dbInstanceClass),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
```

```
  return nil, err
 } else {
  return output.DBInstance, nil
 }
}
```

- For API details, see CreateDBInstance in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    public static String createDBInstanceCluster(RdsClient rdsClient,
            String dbInstanceIdentifier,
            String dbInstanceClusterIdentifier,
            String instanceClass) {
        try {
            CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .engine("aurora-mysql")
                    .dbInstanceClass(instanceClass)
                    .build();

            CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
            System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());
            return response.dbInstance().dbInstanceArn();

        } catch (RdsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }
        return "";
    }
```

- For API details, see CreateDBInstance in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun createDBInstanceCluster(
    dbInstanceIdentifierVal: String?,
    dbInstanceClusterIdentifierVal: String?,
    instanceClassVal: String?,
): String? {
    val instanceRequest =
        CreateDbInstanceRequest {
            dbInstanceIdentifier = dbInstanceIdentifierVal
            dbClusterIdentifier = dbInstanceClusterIdentifierVal
            engine = "aurora-mysql"
            dbInstanceClass = instanceClassVal
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.createDbInstance(instanceRequest)
        print("The status is ${response.dbInstance?.dbInstanceStatus}")
        return response.dbInstance?.dbInstanceArn
    }
}
```

- For API details, see CreateDBInstance in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def create_instance_in_cluster(
        self, instance_id, cluster_id, db_engine, instance_class
    ):
        """
        Creates a database instance in an existing DB cluster. The first database
 that is
        created defaults to a read-write DB instance.

        :param instance_id: The ID to give the newly created DB instance.
        :param cluster_id: The ID of the DB cluster where the DB instance is
 created.
        :param db_engine: The database engine of a database to create in the DB
 instance.
```

```
                          This must be compatible with the configured parameter
group
                          of the DB cluster.
        :param instance_class: The DB instance class for the newly created DB
instance.
        :return: Data about the newly created DB instance.
        """
        try:
            response = self.rds_client.create_db_instance(
                DBInstanceIdentifier=instance_id,
                DBClusterIdentifier=cluster_id,
                Engine=db_engine,
                DBInstanceClass=instance_class,
            )
            db_inst = response["DBInstance"]
        except ClientError as err:
            logger.error(
                "Couldn't create DB instance %s. Here's why: %s: %s",
                instance_id,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return db_inst
```

- For API details, see CreateDBInstance in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   // Get a list of allowed engine versions.
rds.DescribeDbEngineVersions(Engine='aurora-mysql', DBParameterGroupFamily=<the
family used to create your parameter group in step 2>)
   // Create an Aurora DB cluster database cluster that contains a MySql
database and uses the parameter group you created.
   // Wait for DB cluster to be ready. Call rds.DescribeDBClusters and check for
Status == 'available'.
   // Get a list of instance classes available for the selected engine
and engine version. rds.DescribeOrderableDbInstanceOptions(Engine='mysql',
EngineVersion=).

   // Create a database instance in the cluster.
   // Wait for DB instance to be ready. Call rds.DescribeDbInstances and check
for DBInstanceStatus == 'available'.
   pub async fn start_cluster_and_instance(&mut self) -> Result<(),
ScenarioError> {
       if self.password.is_none() {
           return Err(ScenarioError::with(
               "Must set Secret Password before starting a cluster",
           ));
       }
       let create_db_cluster = self
           .rds
           .create_db_cluster(
               DB_CLUSTER_IDENTIFIER,
               DB_CLUSTER_PARAMETER_GROUP_NAME,
               DB_ENGINE,
               self.engine_version.as_deref().expect("engine version"),
               self.username.as_deref().expect("username"),
               self.password
                   .replace(SecretString::new("".to_string()))
                   .expect("password"),
           )
           .await;
       if let Err(err) = create_db_cluster {
           return Err(ScenarioError::new(
               "Failed to create DB Cluster with cluster group",
               &err,
           ));
       }

       self.db_cluster_identifier = create_db_cluster
           .unwrap()
```

```
            .db_cluster
            .and_then(|c| c.db_cluster_identifier);

        if self.db_cluster_identifier.is_none() {
            return Err(ScenarioError::with("Created DB Cluster missing
Identifier"));
        }

        info!(
            "Started a db cluster: {}",
            self.db_cluster_identifier
                .as_deref()
                .unwrap_or("Missing ARN")
        );

        let create_db_instance = self
            .rds
            .create_db_instance(
                self.db_cluster_identifier.as_deref().expect("cluster name"),
                DB_INSTANCE_IDENTIFIER,
                self.instance_class.as_deref().expect("instance class"),
                DB_ENGINE,
            )
            .await;
        if let Err(err) = create_db_instance {
            return Err(ScenarioError::new(
                "Failed to create Instance in DB Cluster",
                &err,
            ));
        }

        self.db_instance_identifier = create_db_instance
            .unwrap()
            .db_instance
            .and_then(|i| i.db_instance_identifier);

        // Cluster creation can take up to 20 minutes to become available
        let cluster_max_wait = Duration::from_secs(20 * 60);
        let waiter = Waiter::builder().max(cluster_max_wait).build();
        while waiter.sleep().await.is_ok() {
            let cluster = self
                .rds
                .describe_db_clusters(
                    self.db_cluster_identifier
```

```
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = cluster {
                warn!(?err, "Failed to describe cluster while waiting for
ready");
                continue;
            }

            let instance = self
                .rds
                .describe_db_instance(
                    self.db_instance_identifier
                        .as_deref()
                        .expect("instance identifier"),
                )
                .await;
            if let Err(err) = instance {
                return Err(ScenarioError::new(
                    "Failed to find instance for cluster",
                    &err,
                ));
            }

            let instances_available = instance
                .unwrap()
                .db_instances()
                .iter()
                .all(|instance| instance.db_instance_status() ==
Some("Available"));

            let endpoints = self
                .rds
                .describe_db_cluster_endpoints(
                    self.db_cluster_identifier
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = endpoints {
                return Err(ScenarioError::new(
```

```
                    "Failed to find endpoint for cluster",
                    &err,
                ));
            }

            let endpoints_available = endpoints
                .unwrap()
                .db_cluster_endpoints()
                .iter()
                .all(|endpoint| endpoint.status() == Some("available"));

            if instances_available && endpoints_available {
                return Ok(());
            }
        }

        Err(ScenarioError::with("timed out waiting for cluster"))
    }

    pub async fn create_db_instance(
        &self,
        cluster_name: &str,
        instance_name: &str,
        instance_class: &str,
        engine: &str,
    ) -> Result<CreateDbInstanceOutput, SdkError<CreateDBInstanceError>> {
        self.inner
            .create_db_instance()
            .db_cluster_identifier(cluster_name)
            .db_instance_identifier(instance_name)
            .db_instance_class(instance_class)
            .engine(engine)
            .send()
            .await
    }

#[tokio::test]
async fn test_start_cluster_and_instance() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
```

```
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

.db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });
```

```
    mock_rds
        .expect_describe_db_instance()
        .with(eq("RustSDKCodeExamplesDBInstance"))
        .return_once(|name| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_instance_identifier(name)
                        .db_instance_status("Available")
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

.db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
        assert!(scenario
            .password
            .replace(SecretString::new("BAD SECRET".into()))
            .unwrap()
            .expose_secret()
            .is_empty());
        assert_eq!(
            scenario.db_cluster_identifier,
            Some("RustSDKCodeExamplesDBCluster".into())
```

```
        );
    });
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Err(SdkError::service_error(
                CreateDBClusterError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db cluster error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _}) if message
 == "Failed to create DB Cluster with cluster group")
}

#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_missing_id() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()
                .db_cluster(DbCluster::builder().build())
```

```
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context:_ }) if message
 == "Created DB Cluster missing Identifier");
}

#[tokio::test]
async fn test_start_cluster_and_instance_instance_create_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .return_once(|_, _, _, _| {
            Err(SdkError::service_error(
                CreateDBInstanceError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db instance error",
                ))),
```

```
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _ }) if message
 == "Failed to create Instance in DB Cluster")
}

#[tokio::test]
async fn test_start_cluster_and_instance_wait_hiccup() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
```

```
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe cluster error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        })
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds.expect_describe_db_instance().return_once(|name| {
        Ok(DescribeDbInstancesOutput::builder()
            .db_instances(
                DbInstance::builder()
                    .db_instance_identifier(name)
                    .db_instance_status("Available")
```

```
                    .build(),
            )
            .build())
    });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

 .db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
    });

    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
    let _ = assertions.await;
}
```

- For API details, see CreateDBInstance in *Amazon SDK for Rust API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DeleteDBCluster` with an Amazon SDK

The following code examples show how to use `DeleteDBCluster`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Delete a particular DB cluster.
    /// </summary>
    /// <param name="dbClusterIdentifier">DB cluster identifier.</param>
    /// <returns>DB cluster object.</returns>
    public async Task<DBCluster> DeleteDBClusterByIdentifierAsync(string
dbClusterIdentifier)
    {
        var response = await _amazonRDS.DeleteDBClusterAsync(
            new DeleteDBClusterRequest()
            {
                DBClusterIdentifier = dbClusterIdentifier,
                SkipFinalSnapshot = true
            });

        return response.DBCluster;
    }
```

- For API details, see DeleteDBCluster in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);

            Aws::RDS::Model::DeleteDBClusterRequest request;
            request.SetDBClusterIdentifier(dbClusterIdentifier);
            request.SetSkipFinalSnapshot(true);

            Aws::RDS::Model::DeleteDBClusterOutcome outcome =
                    client.DeleteDBCluster(request);

            if (outcome.IsSuccess()) {
                std::cout << "DB cluster deletion has started."
                          << std::endl;
                clusterDeleting = true;
                std::cout
                        << "Waiting for DB cluster to delete before deleting the
parameter group."
                        << std::endl;
                std::cout << "This may take a while." << std::endl;
            }
            else {
                std::cerr << "Error with Aurora::DeleteDBCluster. "
                          << outcome.GetError().GetMessage()
                          << std::endl;
                result = false;
            }
```

- For API details, see DeleteDBCluster in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// DeleteDbCluster deletes a DB cluster without keeping a final snapshot.
func (clusters *DbClusters) DeleteDbCluster(ctx context.Context, clusterName
 string) error {
 _, err := clusters.AuroraClient.DeleteDBCluster(ctx, &rds.DeleteDBClusterInput{
  DBClusterIdentifier: aws.String(clusterName),
  SkipFinalSnapshot:   aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete DB cluster %v: %v\n", clusterName, err)
  return err
 } else {
  return nil
 }
}
```

- For API details, see DeleteDBCluster in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void deleteCluster(RdsClient rdsClient, String
dbInstanceClusterIdentifier) {
       try {
           DeleteDbClusterRequest deleteDbClusterRequest =
DeleteDbClusterRequest.builder()
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .skipFinalSnapshot(true)
                   .build();

           rdsClient.deleteDBCluster(deleteDbClusterRequest);
           System.out.println(dbInstanceClusterIdentifier + " was deleted!");

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- For API details, see DeleteDBCluster in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun deleteCluster(dbInstanceClusterIdentifier: String) {
    val deleteDbClusterRequest =
        DeleteDbClusterRequest {
            dbClusterIdentifier = dbInstanceClusterIdentifier
            skipFinalSnapshot = true
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        rdsClient.deleteDbCluster(deleteDbClusterRequest)
        println("$dbInstanceClusterIdentifier was deleted!")
    }
}
```

- For API details, see DeleteDBCluster in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
```

```
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def delete_db_cluster(self, cluster_name):
        """
        Deletes a DB cluster.

        :param cluster_name: The name of the DB cluster to delete.
        """
        try:
            self.rds_client.delete_db_cluster(
                DBClusterIdentifier=cluster_name, SkipFinalSnapshot=True
            )
            logger.info("Deleted DB cluster %s.", cluster_name)
        except ClientError:
            logger.exception("Couldn't delete DB cluster %s.", cluster_name)
            raise
```

- For API details, see DeleteDBCluster in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    pub async fn clean_up(self) -> Result<(), Vec<ScenarioError>> {
        let mut clean_up_errors: Vec<ScenarioError> = vec![];

        // Delete the instance. rds.DeleteDbInstance.
        let delete_db_instance = self
            .rds
            .delete_db_instance(
                self.db_instance_identifier
                    .as_deref()
                    .expect("instance identifier"),
            )
            .await;
        if let Err(err) = delete_db_instance {
            let identifier = self
                .db_instance_identifier
                .as_deref()
                .unwrap_or("Missing Instance Identifier");
            let message = format!("failed to delete db instance {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance to delete
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_instances =
self.rds.describe_db_instances().await;
                if let Err(err) = describe_db_instances {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check instance state during deletion",
                        &err,
                    ));
                    break;
                }
                let db_instances = describe_db_instances
                    .unwrap()
                    .db_instances()
                    .iter()
                    .filter(|instance| instance.db_cluster_identifier ==
self.db_cluster_identifier)
                    .cloned()
                    .collect::<Vec<DbInstance>>();

                if db_instances.is_empty() {
                    trace!("Delete Instance waited and no instances were found");
```

```
                    break;
                }
                match db_instances.first().unwrap().db_instance_status() {
                    Some("Deleting") => continue,
                    Some(status) => {
                        info!("Attempting to delete but instances is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB instance");
                        break;
                    }
                }
            }
        }

        // Delete the DB cluster. rds.DeleteDbCluster.
        let delete_db_cluster = self
            .rds
            .delete_db_cluster(
                self.db_cluster_identifier
                    .as_deref()
                    .expect("cluster identifier"),
            )
            .await;

        if let Err(err) = delete_db_cluster {
            let identifier = self
                .db_cluster_identifier
                .as_deref()
                .unwrap_or("Missing DB Cluster Identifier");
            let message = format!("failed to delete db cluster {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance and cluster to fully delete.
rds.DescribeDbInstances and rds.DescribeDbClusters until both are not found.
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_clusters = self
                    .rds
                    .describe_db_clusters(
                        self.db_cluster_identifier
                            .as_deref()
```

```
                            .expect("cluster identifier"),
                    )
                    .await;
                if let Err(err) = describe_db_clusters {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check cluster state during deletion",
                        &err,
                    ));
                    break;
                }
                let describe_db_clusters = describe_db_clusters.unwrap();
                let db_clusters = describe_db_clusters.db_clusters();
                if db_clusters.is_empty() {
                    trace!("Delete cluster waited and no clusters were found");
                    break;
                }
                match db_clusters.first().unwrap().status() {
                    Some("Deleting") => continue,
                    Some(status) => {
                        info!("Attempting to delete but clusters is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB cluster");
                        break;
                    }
                }
            }
        }

        // Delete the DB cluster parameter group.
rds.DeleteDbClusterParameterGroup.
        let delete_db_cluster_parameter_group = self
            .rds
            .delete_db_cluster_parameter_group(
                self.db_cluster_parameter_group
                    .map(|g| {
                        g.db_cluster_parameter_group_name
                            .unwrap_or_else(||
DB_CLUSTER_PARAMETER_GROUP_NAME.to_string())
                    })
                    .as_deref()
                    .expect("cluster parameter group name"),
```

```
            )
            .await;
        if let Err(error) = delete_db_cluster_parameter_group {
            clean_up_errors.push(ScenarioError::new(
                "Failed to delete the db cluster parameter group",
                &error,
            ))
        }

        if clean_up_errors.is_empty() {
            Ok(())
        } else {
            Err(clean_up_errors)
        }
    }

    pub async fn delete_db_cluster(
        &self,
        cluster_identifier: &str,
    ) -> Result<DeleteDbClusterOutput, SdkError<DeleteDBClusterError>> {
        self.inner
            .delete_db_cluster()
            .db_cluster_identifier(cluster_identifier)
            .skip_final_snapshot(true)
            .send()
            .await
    }

#[tokio::test]
async fn test_scenario_clean_up() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
```

```
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
                .build())
        })
        .with()
        .times(1)
        .returning(|| Ok(DescribeDbInstancesOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster()
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| Ok(DescribeDbClustersOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
```

```
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
            .build(),
    );

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_ok());
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Cluster
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Cluster
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_scenario_clean_up_errors() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
```

```
                .build())
        })
        .with()
        .times(1)
        .returning(|| {
            Err(SdkError::service_error(
                DescribeDBInstancesError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db instances error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        });

    mock_rds
        .expect_delete_db_cluster()
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db clusters error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
```

```
            ))
        });

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
 Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
            .build(),
    );

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_err());
        let errs = clean_up.unwrap_err();
        assert_eq!(errs.len(), 2);
        assert_matches!(errs.first(), Some(ScenarioError {message, context: _})
 if message == "Failed to check instance state during deletion");
        assert_matches!(errs.get(1), Some(ScenarioError {message, context: _}) if
 message == "Failed to check cluster state during deletion");
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Cluster
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Cluster
    tokio::time::resume();
    let _ = assertions.await;
}
```

- For API details, see DeleteDBCluster in *Amazon SDK for Rust API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DeleteDBClusterParameterGroup` with an Amazon SDK

The following code examples show how to use `DeleteDBClusterParameterGroup`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Delete a particular parameter group by name.
    /// </summary>
    /// <param name="groupName">The name of the parameter group.</param>
    /// <returns>True if successful.</returns>
    public async Task<bool> DeleteClusterParameterGroupByNameAsync(string
groupName)
    {
        var request = new DeleteDBClusterParameterGroupRequest
        {
            DBClusterParameterGroupName = groupName,
        };

        var response = await
_amazonRDS.DeleteDBClusterParameterGroupAsync(request);
        return response.HttpStatusCode == System.Net.HttpStatusCode.OK;
    }
```

- For API details, see DeleteDBClusterParameterGroup in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    Aws::Client::ClientConfiguration clientConfig;
    // Optional: Set to the AWS Region (overrides config file).
    // clientConfig.region = "us-east-1";

Aws::RDS::RDSClient client(clientConfig);

    Aws::RDS::Model::DeleteDBClusterParameterGroupRequest request;
    request.SetDBClusterParameterGroupName(parameterGroupName);

    Aws::RDS::Model::DeleteDBClusterParameterGroupOutcome outcome =
            client.DeleteDBClusterParameterGroup(request);

    if (outcome.IsSuccess()) {
        std::cout << "The DB parameter group was successfully deleted."
                  << std::endl;
    }
    else {
        std::cerr << "Error with Aurora::DeleteDBClusterParameterGroup. "
                  << outcome.GetError().GetMessage()
                  << std::endl;
        result = false;
    }
```

- For API details, see DeleteDBClusterParameterGroup in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// DeleteParameterGroup deletes the named DB cluster parameter group.
func (clusters *DbClusters) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := clusters.AuroraClient.DeleteDBClusterParameterGroup(ctx,
  &rds.DeleteDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

- For API details, see DeleteDBClusterParameterGroup in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void deleteDBClusterGroup(RdsClient rdsClient, String
dbClusterGroupName, String clusterDBARN)
           throws InterruptedException {
       try {
           boolean isDataDel = false;
           boolean didFind;
           String instanceARN;

           // Make sure that the database has been deleted.
           while (!isDataDel) {
               DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
               List<DBInstance> instanceList = response.dbInstances();
               int listSize = instanceList.size();
               didFind = false;
               int index = 1;
               for (DBInstance instance : instanceList) {
                   instanceARN = instance.dbInstanceArn();
                   if (instanceARN.compareTo(clusterDBARN) == 0) {
                       System.out.println(clusterDBARN + " still exists");
                       didFind = true;
                   }
                   if ((index == listSize) && (!didFind)) {
                       // Went through the entire list and did not find the
database ARN.
                       isDataDel = true;
                   }
                   Thread.sleep(sleepTime * 1000);
```

```
                    index++;
                }
            }

            DeleteDbClusterParameterGroupRequest clusterParameterGroupRequest =
DeleteDbClusterParameterGroupRequest
                    .builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .build();


rdsClient.deleteDBClusterParameterGroup(clusterParameterGroupRequest);
            System.out.println(dbClusterGroupName + " was deleted.");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- For API details, see DeleteDBClusterParameterGroup in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
@Throws(InterruptedException::class)
suspend fun deleteDBClusterGroup(
    dbClusterGroupName: String,
    clusterDBARN: String,
) {
    var isDataDel = false
    var didFind: Boolean
```

```
    var instanceARN: String

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        // Make sure that the database has been deleted.
        while (!isDataDel) {
            val response = rdsClient.describeDbInstances()
            val instanceList = response.dbInstances
            val listSize = instanceList?.size
            isDataDel = false
            didFind = false
            var index = 1
            if (instanceList != null) {
                for (instance in instanceList) {
                    instanceARN = instance.dbInstanceArn.toString()
                    if (instanceARN.compareTo(clusterDBARN) == 0) {
                        println("$clusterDBARN still exists")
                        didFind = true
                    }
                    if (index == listSize && !didFind) {
                        // Went through the entire list and did not find the
 database ARN.
                        isDataDel = true
                    }
                    delay(slTime * 1000)
                    index++
                }
            }
        }
        val clusterParameterGroupRequest =
            DeleteDbClusterParameterGroupRequest {
                dbClusterParameterGroupName = dbClusterGroupName
            }

        rdsClient.deleteDbClusterParameterGroup(clusterParameterGroupRequest)
        println("$dbClusterGroupName was deleted.")
    }
}
```

- For API details, see DeleteDBClusterParameterGroup in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def delete_parameter_group(self, parameter_group_name):
        """
        Deletes a DB cluster parameter group.

        :param parameter_group_name: The name of the parameter group to delete.
        :return: Data about the parameter group.
        """
        try:
            response = self.rds_client.delete_db_cluster_parameter_group(
                DBClusterParameterGroupName=parameter_group_name
            )
        except ClientError as err:
            logger.error(
```

```
                "Couldn't delete parameter group %s. Here's why: %s: %s",
                parameter_group_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return response
```

- For API details, see DeleteDBClusterParameterGroup in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
pub async fn clean_up(self) -> Result<(), Vec<ScenarioError>> {
    let mut clean_up_errors: Vec<ScenarioError> = vec![];

    // Delete the instance. rds.DeleteDbInstance.
    let delete_db_instance = self
        .rds
        .delete_db_instance(
            self.db_instance_identifier
                .as_deref()
                .expect("instance identifier"),
        )
        .await;
    if let Err(err) = delete_db_instance {
        let identifier = self
            .db_instance_identifier
            .as_deref()
            .unwrap_or("Missing Instance Identifier");
```

```
            let message = format!("failed to delete db instance {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance to delete
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_instances =
self.rds.describe_db_instances().await;
                if let Err(err) = describe_db_instances {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check instance state during deletion",
                        &err,
                    ));
                    break;
                }
                let db_instances = describe_db_instances
                    .unwrap()
                    .db_instances()
                    .iter()
                    .filter(|instance| instance.db_cluster_identifier ==
self.db_cluster_identifier)
                    .cloned()
                    .collect::<Vec<DbInstance>>();

                if db_instances.is_empty() {
                    trace!("Delete Instance waited and no instances were found");
                    break;
                }
                match db_instances.first().unwrap().db_instance_status() {
                    Some("Deleting") => continue,
                    Some(status) => {
                        info!("Attempting to delete but instances is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB instance");
                        break;
                    }
                }
            }
        }

        // Delete the DB cluster. rds.DeleteDbCluster.
```

```
        let delete_db_cluster = self
            .rds
            .delete_db_cluster(
                self.db_cluster_identifier
                    .as_deref()
                    .expect("cluster identifier"),
            )
            .await;

        if let Err(err) = delete_db_cluster {
            let identifier = self
                .db_cluster_identifier
                .as_deref()
                .unwrap_or("Missing DB Cluster Identifier");
            let message = format!("failed to delete db cluster {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance and cluster to fully delete.
rds.DescribeDbInstances and rds.DescribeDbClusters until both are not found.
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_clusters = self
                    .rds
                    .describe_db_clusters(
                        self.db_cluster_identifier
                            .as_deref()
                            .expect("cluster identifier"),
                    )
                    .await;
                if let Err(err) = describe_db_clusters {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check cluster state during deletion",
                        &err,
                    ));
                    break;
                }
                let describe_db_clusters = describe_db_clusters.unwrap();
                let db_clusters = describe_db_clusters.db_clusters();
                if db_clusters.is_empty() {
                    trace!("Delete cluster waited and no clusters were found");
                    break;
                }
                match db_clusters.first().unwrap().status() {
                    Some("Deleting") => continue,
```

```
                    Some(status) => {
                        info!("Attempting to delete but clusters is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB cluster");
                        break;
                    }
                }
            }
        }

        // Delete the DB cluster parameter group.
rds.DeleteDbClusterParameterGroup.
        let delete_db_cluster_parameter_group = self
            .rds
            .delete_db_cluster_parameter_group(
                self.db_cluster_parameter_group
                    .map(|g| {
                        g.db_cluster_parameter_group_name
                            .unwrap_or_else(||
DB_CLUSTER_PARAMETER_GROUP_NAME.to_string())
                    })
                    .as_deref()
                    .expect("cluster parameter group name"),
            )
            .await;
        if let Err(error) = delete_db_cluster_parameter_group {
            clean_up_errors.push(ScenarioError::new(
                "Failed to delete the db cluster parameter group",
                &error,
            ))
        }

        if clean_up_errors.is_empty() {
            Ok(())
        } else {
            Err(clean_up_errors)
        }
    }

    pub async fn delete_db_cluster_parameter_group(
        &self,
```

```
        name: &str,
    ) -> Result<DeleteDbClusterParameterGroupOutput,
 SdkError<DeleteDBClusterParameterGroupError>>
    {
        self.inner
            .delete_db_cluster_parameter_group()
            .db_cluster_parameter_group_name(name)
            .send()
            .await
    }

#[tokio::test]
async fn test_scenario_clean_up() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
                .build())
        })
        .with()
        .times(1)
        .returning(|| Ok(DescribeDbInstancesOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster()
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));

    mock_rds
```

```
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| Ok(DescribeDbClustersOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
            .build(),
    );

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_ok());
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
Describe Cluster
```

```
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Cluster
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_scenario_clean_up_errors() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
                .build())
        })
        .with()
        .times(1)
        .returning(|| {
            Err(SdkError::service_error(
                DescribeDBInstancesError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db instances error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    mock_rds
        .expect_delete_db_cluster()
```

```
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db clusters error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        });

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
            .build(),
    );
```

```
    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_err());
        let errs = clean_up.unwrap_err();
        assert_eq!(errs.len(), 2);
        assert_matches!(errs.first(), Some(ScenarioError {message, context: _})
 if message == "Failed to check instance state during deletion");
        assert_matches!(errs.get(1), Some(ScenarioError {message, context: _}) if
 message == "Failed to check cluster state during deletion");
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Cluster
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Cluster
    tokio::time::resume();
    let _ = assertions.await;
}
```

- For API details, see DeleteDBClusterParameterGroup in *Amazon SDK for Rust API reference*.

SAP ABAP

SDK for SAP ABAP

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    TRY.
        lo_rds->deletedbclusterparamgroup(
          iv_dbclusterparamgroupname = iv_param_group_name
        ).
```

```
      CATCH /aws1/cx_rdsdbprmgrnotfndfault.
        " Re-raise exception - parameter group not found
        RAISE EXCEPTION TYPE /aws1/cx_rdsdbprmgrnotfndfault.
      CATCH /aws1/cx_rdsinvdbprmgrstatef00.
        " Re-raise exception - invalid state
        RAISE EXCEPTION TYPE /aws1/cx_rdsinvdbprmgrstatef00.
    ENDTRY.
```

- For API details, see DeleteDBClusterParameterGroup in *Amazon SDK for SAP ABAP API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DeleteDBInstance` with an Amazon SDK

The following code examples show how to use `DeleteDBInstance`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
/// <summary>
/// Delete a particular DB instance.
/// </summary>
/// <param name="dbInstanceIdentifier">DB instance identifier.</param>
/// <returns>DB instance object.</returns>
```

```
    public async Task<DBInstance> DeleteDBInstanceByIdentifierAsync(string
dbInstanceIdentifier)
    {
        var response = await _amazonRDS.DeleteDBInstanceAsync(
            new DeleteDBInstanceRequest()
            {
                DBInstanceIdentifier = dbInstanceIdentifier,
                SkipFinalSnapshot = true,
                DeleteAutomatedBackups = true
            });

        return response.DBInstance;
    }
```

- For API details, see DeleteDBInstance in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);

            Aws::RDS::Model::DeleteDBInstanceRequest request;
            request.SetDBInstanceIdentifier(dbInstanceIdentifier);
            request.SetSkipFinalSnapshot(true);
            request.SetDeleteAutomatedBackups(true);

            Aws::RDS::Model::DeleteDBInstanceOutcome outcome =
                    client.DeleteDBInstance(request);

            if (outcome.IsSuccess()) {
```

```
                std::cout << "DB instance deletion has started."
                          << std::endl;
                instanceDeleting = true;
                std::cout
                        << "Waiting for DB instance to delete before deleting the
 parameter group."
                        << std::endl;
            }
            else {
                std::cerr << "Error with Aurora::DeleteDBInstance. "
                          << outcome.GetError().GetMessage()
                          << std::endl;
                result = false;
            }
```

- For API details, see DeleteDBInstance in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}
```

```
// DeleteInstance deletes a DB instance.
func (clusters *DbClusters) DeleteInstance(ctx context.Context, instanceName
 string) error {
 _, err := clusters.AuroraClient.DeleteDBInstance(ctx,
 &rds.DeleteDBInstanceInput{
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
 }
}
```

- For API details, see DeleteDBInstance in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void deleteDatabaseInstance(RdsClient rdsClient, String
dbInstanceIdentifier) {
       try {
           DeleteDbInstanceRequest deleteDbInstanceRequest =
DeleteDbInstanceRequest.builder()
                   .dbInstanceIdentifier(dbInstanceIdentifier)
                   .deleteAutomatedBackups(true)
                   .skipFinalSnapshot(true)
```

```
                    .build();

            DeleteDbInstanceResponse response =
 rdsClient.deleteDBInstance(deleteDbInstanceRequest);
            System.out.println("The status of the database is " +
 response.dbInstance().dbInstanceStatus());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- For API details, see DeleteDBInstance in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun deleteDBInstance(dbInstanceIdentifierVal: String) {
    val deleteDbInstanceRequest =
        DeleteDbInstanceRequest {
            dbInstanceIdentifier = dbInstanceIdentifierVal
            deleteAutomatedBackups = true
            skipFinalSnapshot = true
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.deleteDbInstance(deleteDbInstanceRequest)
        print("The status of the database is
 ${response.dbInstance?.dbInstanceStatus}")
    }
}
```

- For API details, see DeleteDBInstance in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def delete_db_instance(self, instance_id):
        """
        Deletes a DB instance.

        :param instance_id: The ID of the DB instance to delete.
        :return: Data about the deleted DB instance.
        """
        try:
            response = self.rds_client.delete_db_instance(
                DBInstanceIdentifier=instance_id,
                SkipFinalSnapshot=True,
```

```
                DeleteAutomatedBackups=True,
            )
            db_inst = response["DBInstance"]
        except ClientError as err:
            logger.error(
                "Couldn't delete DB instance %s. Here's why: %s: %s",
                instance_id,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return db_inst
```

- For API details, see DeleteDBInstance in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    pub async fn clean_up(self) -> Result<(), Vec<ScenarioError>> {
        let mut clean_up_errors: Vec<ScenarioError> = vec![];

        // Delete the instance. rds.DeleteDbInstance.
        let delete_db_instance = self
            .rds
            .delete_db_instance(
                self.db_instance_identifier
                    .as_deref()
                    .expect("instance identifier"),
            )
            .await;
        if let Err(err) = delete_db_instance {
            let identifier = self
```

```
                .db_instance_identifier
                .as_deref()
                .unwrap_or("Missing Instance Identifier");
            let message = format!("failed to delete db instance {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance to delete
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_instances =
self.rds.describe_db_instances().await;
                if let Err(err) = describe_db_instances {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check instance state during deletion",
                        &err,
                    ));
                    break;
                }
                let db_instances = describe_db_instances
                    .unwrap()
                    .db_instances()
                    .iter()
                    .filter(|instance| instance.db_cluster_identifier ==
self.db_cluster_identifier)
                    .cloned()
                    .collect::<Vec<DbInstance>>();

                if db_instances.is_empty() {
                    trace!("Delete Instance waited and no instances were found");
                    break;
                }
                match db_instances.first().unwrap().db_instance_status() {
                    Some("Deleting") => continue,
                    Some(status) => {
                        info!("Attempting to delete but instances is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB instance");
                        break;
                    }
                }
            }
```

```
        }

        // Delete the DB cluster. rds.DeleteDbCluster.
        let delete_db_cluster = self
            .rds
            .delete_db_cluster(
                self.db_cluster_identifier
                    .as_deref()
                    .expect("cluster identifier"),
            )
            .await;

        if let Err(err) = delete_db_cluster {
            let identifier = self
                .db_cluster_identifier
                .as_deref()
                .unwrap_or("Missing DB Cluster Identifier");
            let message = format!("failed to delete db cluster {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance and cluster to fully delete.
rds.DescribeDbInstances and rds.DescribeDbClusters until both are not found.
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_clusters = self
                    .rds
                    .describe_db_clusters(
                        self.db_cluster_identifier
                            .as_deref()
                            .expect("cluster identifier"),
                    )
                    .await;
                if let Err(err) = describe_db_clusters {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check cluster state during deletion",
                        &err,
                    ));
                    break;
                }
                let describe_db_clusters = describe_db_clusters.unwrap();
                let db_clusters = describe_db_clusters.db_clusters();
                if db_clusters.is_empty() {
                    trace!("Delete cluster waited and no clusters were found");
                    break;
```

```
                }
                match db_clusters.first().unwrap().status() {
                    Some("Deleting") => continue,
                    Some(status) => {
                        info!("Attempting to delete but clusters is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB cluster");
                        break;
                    }
                }
            }
        }

        // Delete the DB cluster parameter group.
rds.DeleteDbClusterParameterGroup.
        let delete_db_cluster_parameter_group = self
            .rds
            .delete_db_cluster_parameter_group(
                self.db_cluster_parameter_group
                    .map(|g| {
                        g.db_cluster_parameter_group_name
                            .unwrap_or_else(||
DB_CLUSTER_PARAMETER_GROUP_NAME.to_string())
                    })
                    .as_deref()
                    .expect("cluster parameter group name"),
            )
            .await;
        if let Err(error) = delete_db_cluster_parameter_group {
            clean_up_errors.push(ScenarioError::new(
                "Failed to delete the db cluster parameter group",
                &error,
            ))
        }

        if clean_up_errors.is_empty() {
            Ok(())
        } else {
            Err(clean_up_errors)
        }
    }
```

```
    pub async fn delete_db_instance(
        &self,
        instance_identifier: &str,
    ) -> Result<DeleteDbInstanceOutput, SdkError<DeleteDBInstanceError>> {
        self.inner
            .delete_db_instance()
            .db_instance_identifier(instance_identifier)
            .skip_final_snapshot(true)
            .send()
            .await
    }

#[tokio::test]
async fn test_scenario_clean_up() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
                .build())
        })
        .with()
        .times(1)
        .returning(|| Ok(DescribeDbInstancesOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster()
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));
```

```
    mock_rds
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| Ok(DescribeDbClustersOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
            .build(),
    );

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_ok());
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
Describe Instances
```

```
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Cluster
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Cluster
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_scenario_clean_up_errors() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
                .build())
        })
        .with()
        .times(1)
        .returning(|| {
            Err(SdkError::service_error(
                DescribeDBInstancesError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db instances error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });
```

```
    mock_rds
        .expect_delete_db_cluster()
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db clusters error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        });

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
```

```
            .build(),
    );

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_err());
        let errs = clean_up.unwrap_err();
        assert_eq!(errs.len(), 2);
        assert_matches!(errs.first(), Some(ScenarioError {message, context: _})
 if message == "Failed to check instance state during deletion");
        assert_matches!(errs.get(1), Some(ScenarioError {message, context: _}) if
 message == "Failed to check cluster state during deletion");
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Cluster
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Cluster
    tokio::time::resume();
    let _ = assertions.await;
}
```

- For API details, see DeleteDBInstance in *Amazon SDK for Rust API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DescribeDBClusterParameterGroups` with an Amazon SDK

The following code examples show how to use `DescribeDBClusterParameterGroups`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Get the description of a DB cluster parameter group by name.
    /// </summary>
    /// <param name="name">The name of the DB parameter group to describe.</
param>
    /// <returns>The parameter group description.</returns>
    public async Task<DBClusterParameterGroup?>
 DescribeCustomDBClusterParameterGroupAsync(string name)
    {
        var response = await _amazonRDS.DescribeDBClusterParameterGroupsAsync(
            new DescribeDBClusterParameterGroupsRequest()
            {
                DBClusterParameterGroupName = name
            });
        return response.DBClusterParameterGroups.FirstOrDefault();
    }
```

- For API details, see DescribeDBClusterParameterGroups in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);

        Aws::RDS::Model::DescribeDBClusterParameterGroupsRequest request;
        request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);

        Aws::RDS::Model::DescribeDBClusterParameterGroupsOutcome outcome =
                client.DescribeDBClusterParameterGroups(request);

        if (outcome.IsSuccess()) {
            std::cout << "DB cluster parameter group named '" <<
                      CLUSTER_PARAMETER_GROUP_NAME << "' already exists." <<
 std::endl;
            dbParameterGroupFamily =
 outcome.GetResult().GetDBClusterParameterGroups()
[0].GetDBParameterGroupFamily();
        }

        else {
            std::cerr << "Error with Aurora::DescribeDBClusterParameterGroups. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            return false;
        }
```

- For API details, see DescribeDBClusterParameterGroups in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetParameterGroup gets a DB cluster parameter group by name.
func (clusters *DbClusters) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBClusterParameterGroup, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterParameterGroups(
  ctx, &rds.DescribeDBClusterParameterGroupsInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
  return nil, err
 } else {
  return &output.DBClusterParameterGroups[0], err
 }
}
```

- For API details, see DescribeDBClusterParameterGroups in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void describeDbClusterParameterGroups(RdsClient rdsClient,
String dbClusterGroupName) {
       try {
           DescribeDbClusterParameterGroupsRequest groupsRequest =
DescribeDbClusterParameterGroupsRequest.builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .maxRecords(20)
                   .build();

           List<DBClusterParameterGroup> groups =
rdsClient.describeDBClusterParameterGroups(groupsRequest)
                   .dbClusterParameterGroups();
           for (DBClusterParameterGroup group : groups) {
               System.out.println("The group name is " +
group.dbClusterParameterGroupName());
               System.out.println("The group ARN is " +
group.dbClusterParameterGroupArn());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- For API details, see DescribeDBClusterParameterGroups in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun describeDbClusterParameterGroups(dbClusterGroupName: String?) {
    val groupsRequest =
        DescribeDbClusterParameterGroupsRequest {
            dbClusterParameterGroupName = dbClusterGroupName
            maxRecords = 20
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.describeDbClusterParameterGroups(groupsRequest)
        response.dbClusterParameterGroups?.forEach { group ->
            println("The group name is ${group.dbClusterParameterGroupName}")
            println("The group ARN is ${group.dbClusterParameterGroupArn}")
        }
    }
}
```

- For API details, see DescribeDBClusterParameterGroups in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def get_parameter_group(self, parameter_group_name):
        """
        Gets a DB cluster parameter group.

        :param parameter_group_name: The name of the parameter group to retrieve.
        :return: The requested parameter group.
        """
        try:
            response = self.rds_client.describe_db_cluster_parameter_groups(
                DBClusterParameterGroupName=parameter_group_name
            )
            parameter_group = response["DBClusterParameterGroups"][0]
        except ClientError as err:
            if err.response["Error"]["Code"] == "DBParameterGroupNotFound":
                logger.info("Parameter group %s does not exist.",
 parameter_group_name)
            else:
                logger.error(
                    "Couldn't get parameter group %s. Here's why: %s: %s",
                    parameter_group_name,
                    err.response["Error"]["Code"],
                    err.response["Error"]["Message"],
                )
                raise
```

```
        else:
            return parameter_group
```

- For API details, see DescribeDBClusterParameterGroups in *Amazon SDK for Python (Boto3) API Reference*.

SAP ABAP

SDK for SAP ABAP

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
TRY.
    DATA(lo_output) = lo_rds->describedbclusterparamgroups(
      iv_dbclusterparamgroupname = iv_param_group_name
    ).
    DATA(lt_param_groups) = lo_output->get_dbclusterparametergroups( ).
    IF lines( lt_param_groups ) > 0.
      oo_result = lt_param_groups[ 1 ].
    ENDIF.
  CATCH /aws1/cx_rdsdbprmgrnotfndfault.
ENDTRY.
```

- For API details, see DescribeDBClusterParameterGroups in *Amazon SDK for SAP ABAP API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DescribeDBClusterParameters` with an Amazon SDK

The following code examples show how to use `DescribeDBClusterParameters`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Describe the cluster parameters in a parameter group.
    /// </summary>
    /// <param name="groupName">The name of the parameter group.</param>
    /// <param name="source">The optional name of the source filter.</param>
    /// <returns>The collection of parameters.</returns>
    public async Task<List<Parameter>>
DescribeDBClusterParametersInGroupAsync(string groupName, string? source = null)
    {
        var paramList = new List<Parameter>();

        DescribeDBClusterParametersResponse response;
        var request = new DescribeDBClusterParametersRequest
        {
            DBClusterParameterGroupName = groupName,
            Source = source,
        };

        // Get the full list if there are multiple pages.
        do
        {
            response = await
_amazonRDS.DescribeDBClusterParametersAsync(request);
            paramList.AddRange(response.Parameters);

            request.Marker = response.Marker;
```

```
        }
        while (response.Marker is not null);

        return paramList;
    }
```

- For API details, see DescribeDBClusterParameters in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);


//! Routine which gets DB parameters using the 'DescribeDBClusterParameters' api.
/*!
 \sa getDBCLusterParameters()
 \param parameterGroupName: The name of the cluster parameter group.
 \param namePrefix: Prefix string to filter results by parameter name.
 \param source: A source such as 'user', ignored if empty.
 \param parametersResult: Vector of 'Parameter' objects returned by the routine.
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
 */
bool AwsDoc::Aurora::getDBCLusterParameters(const Aws::String
 &parameterGroupName,
                                            const Aws::String &namePrefix,
                                            const Aws::String &source,

 Aws::Vector<Aws::RDS::Model::Parameter> &parametersResult,
```

```
                                                const Aws::RDS::RDSClient &client) {
    Aws::String marker; // The marker is used for pagination.
    do {
        Aws::RDS::Model::DescribeDBClusterParametersRequest request;
        request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);
        if (!marker.empty()) {
            request.SetMarker(marker);
        }
        if (!source.empty()) {
            request.SetSource(source);
        }

        Aws::RDS::Model::DescribeDBClusterParametersOutcome outcome =
                client.DescribeDBClusterParameters(request);

        if (outcome.IsSuccess()) {
            const Aws::Vector<Aws::RDS::Model::Parameter> &parameters =
                    outcome.GetResult().GetParameters();
            for (const Aws::RDS::Model::Parameter &parameter: parameters) {
                if (!namePrefix.empty()) {
                    if (parameter.GetParameterName().find(namePrefix) == 0) {
                        parametersResult.push_back(parameter);
                    }
                }
                else {
                    parametersResult.push_back(parameter);
                }
            }

            marker = outcome.GetResult().GetMarker();
        }
        else {
            std::cerr << "Error with Aurora::DescribeDBClusterParameters. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            return false;
        }
    } while (!marker.empty());

    return true;
}
```

- For API details, see DescribeDBClusterParameters in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetParameters gets the parameters that are contained in a DB cluster parameter
 group.
func (clusters *DbClusters) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
 []types.Parameter, error) {

 var output *rds.DescribeDBClusterParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator :=
 rds.NewDescribeDBClusterParametersPaginator(clusters.AuroraClient,
  &rds.DescribeDBClusterParametersInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Source:                      aws.String(source),
  })
```

```
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get paramaeters for %v: %v\n", parameterGroupName, err)
   break
  } else {
   params = append(params, output.Parameters...)
  }
 }
 return params, err
}
```

- For API details, see DescribeDBClusterParameters in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void describeDbClusterParameters(RdsClient rdsClient, String
dbCLusterGroupName, int flag) {
       try {
           DescribeDbClusterParametersRequest dbParameterGroupsRequest;
           if (flag == 0) {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .build();
           } else {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .source("user")
                       .build();
           }
```

```
            DescribeDbClusterParametersResponse response = rdsClient
                    .describeDBClusterParameters(dbParameterGroupsRequest);
            List<Parameter> dbParameters = response.parameters();
            String paraName;
            for (Parameter para : dbParameters) {
                // Only print out information about either auto_increment_offset
or
                // auto_increment_increment.
                paraName = para.parameterName();
                if ((paraName.compareTo("auto_increment_offset") == 0)
                        || (paraName.compareTo("auto_increment_increment ") ==
0)) {
                    System.out.println("*** The parameter name is  " + paraName);
                    System.out.println("*** The parameter value is  " +
para.parameterValue());
                    System.out.println("*** The parameter data type is " +
para.dataType());
                    System.out.println("*** The parameter description is " +
para.description());
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- For API details, see DescribeDBClusterParameters in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun describeDbClusterParameters(
    dbCLusterGroupName: String?,
    flag: Int,
) {
    val dbParameterGroupsRequest: DescribeDbClusterParametersRequest
    dbParameterGroupsRequest =
        if (flag == 0) {
            DescribeDbClusterParametersRequest {
                dbClusterParameterGroupName = dbCLusterGroupName
            }
        } else {
            DescribeDbClusterParametersRequest {
                dbClusterParameterGroupName = dbCLusterGroupName
                source = "user"
            }
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response =
 rdsClient.describeDbClusterParameters(dbParameterGroupsRequest)
        response.parameters?.forEach { para ->
            // Only print out information about either auto_increment_offset or
 auto_increment_increment.
            val paraName = para.parameterName
            if (paraName != null) {
                if (paraName.compareTo("auto_increment_offset") == 0 ||
 paraName.compareTo("auto_increment_increment ") == 0) {
                    println("*** The parameter name is  $paraName")
                    println("*** The parameter value is  ${para.parameterValue}")
                    println("*** The parameter data type is ${para.dataType}")
                    println("*** The parameter description is
 ${para.description}")
```

```
                    println("*** The parameter allowed values  is
 ${para.allowedValues}")
                }
            }
        }
    }
}
```

- For API details, see DescribeDBClusterParameters in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def get_parameters(self, parameter_group_name, name_prefix="", source=None):
        """
```

```
        Gets the parameters that are contained in a DB cluster parameter group.

        :param parameter_group_name: The name of the parameter group to query.
        :param name_prefix: When specified, the retrieved list of parameters is
filtered
                            to contain only parameters that start with this
prefix.
        :param source: When specified, only parameters from this source are
retrieved.
                       For example, a source of 'user' retrieves only parameters
that
                       were set by a user.
        :return: The list of requested parameters.
        """
        try:
            kwargs = {"DBClusterParameterGroupName": parameter_group_name}
            if source is not None:
                kwargs["Source"] = source
            parameters = []
            paginator =
self.rds_client.get_paginator("describe_db_cluster_parameters")
            for page in paginator.paginate(**kwargs):
                parameters += [
                    p
                    for p in page["Parameters"]
                    if p["ParameterName"].startswith(name_prefix)
                ]
        except ClientError as err:
            logger.error(
                "Couldn't get parameters for %s. Here's why: %s: %s",
                parameter_group_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return parameters
```

- For API details, see DescribeDBClusterParameters in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   // Get the parameter group. rds.DescribeDbClusterParameterGroups
   // Get parameters in the group. This is a long list so you will have to
paginate. Find the auto_increment_offset and auto_increment_increment parameters
(by ParameterName). rds.DescribeDbClusterParameters
   // Parse the ParameterName, Description, and AllowedValues values and display
them.
   pub async fn cluster_parameters(&self) ->
Result<Vec<AuroraScenarioParameter>, ScenarioError> {
       let parameters_output = self
           .rds
           .describe_db_cluster_parameters(DB_CLUSTER_PARAMETER_GROUP_NAME)
           .await;

       if let Err(err) = parameters_output {
           return Err(ScenarioError::new(
               format!("Failed to retrieve parameters for
{DB_CLUSTER_PARAMETER_GROUP_NAME}"),
               &err,
           ));
       }

       let parameters = parameters_output
           .unwrap()
           .into_iter()
           .flat_map(|p| p.parameters.unwrap_or_default().into_iter())
           .filter(|p|
FILTER_PARAMETER_NAMES.contains(p.parameter_name().unwrap_or_default()))
           .map(AuroraScenarioParameter::from)
           .collect::<Vec<_>>();

       Ok(parameters)
   }
```

```
    pub async fn describe_db_cluster_parameters(
        &self,
        name: &str,
    ) -> Result<Vec<DescribeDbClusterParametersOutput>,
 SdkError<DescribeDBClusterParametersError>>
    {
        self.inner
            .describe_db_cluster_parameters()
            .db_cluster_parameter_group_name(name)
            .into_paginator()
            .send()
            .try_collect()
            .await
    }

#[tokio::test]
async fn test_scenario_cluster_parameters() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_cluster_parameters()
        .with(eq("RustSDKCodeExamplesDBParameterGroup"))
        .return_once(|_| {
            Ok(vec![DescribeDbClusterParametersOutput::builder()
                .parameters(Parameter::builder().parameter_name("a").build())
                .parameters(Parameter::builder().parameter_name("b").build())
                .parameters(
                    Parameter::builder()
                        .parameter_name("auto_increment_offset")
                        .build(),
                )
                .parameters(Parameter::builder().parameter_name("c").build())
                .parameters(
                    Parameter::builder()
                        .parameter_name("auto_increment_increment")
                        .build(),
                )
                .parameters(Parameter::builder().parameter_name("d").build())
                .build()])
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("RustSDKCodeExamplesDBCluster".into());
```

```
    let params = scenario.cluster_parameters().await.expect("cluster params");
    let names: Vec<String> = params.into_iter().map(|p| p.name).collect();
    assert_eq!(
        names,
        vec!["auto_increment_offset", "auto_increment_increment"]
    );
}

#[tokio::test]
async fn test_scenario_cluster_parameters_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_cluster_parameters()
        .with(eq("RustSDKCodeExamplesDBParameterGroup"))
        .return_once(|_| {
            Err(SdkError::service_error(
                DescribeDBClusterParametersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe_db_cluster_parameters_error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some("RustSDKCodeExamplesDBCluster".into());
    let params = scenario.cluster_parameters().await;
    assert_matches!(params, Err(ScenarioError { message, context: _ }) if message
 == "Failed to retrieve parameters for RustSDKCodeExamplesDBParameterGroup");
}
```

- For API details, see DescribeDBClusterParameters in *Amazon SDK for Rust API reference*.

SAP ABAP

SDK for SAP ABAP

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
TRY.
    DATA lv_marker TYPE /aws1/rdsstring VALUE ''.
    DATA lt_all_parameters TYPE /aws1/cl_rdsparameter=>tt_parameterslist.

    DO.
      DATA(lo_output) = lo_rds->describedbclusterparameters(
        iv_dbclusterparamgroupname = iv_param_group_name
        iv_source = iv_source
        iv_marker = lv_marker
      ).

      LOOP AT lo_output->get_parameters( ) INTO DATA(lo_param).
        IF iv_name_prefix IS INITIAL OR
           lo_param->get_parametername( ) CP |{ iv_name_prefix }*|.
          APPEND lo_param TO lt_all_parameters.
        ENDIF.
      ENDLOOP.

      lv_marker = lo_output->get_marker( ).
      IF lv_marker IS INITIAL.
        EXIT.
      ENDIF.
    ENDDO.

    ot_parameters = lt_all_parameters.
  CATCH /aws1/cx_rdsdbprmgrnotfndfault.
    " Re-raise exception - parameter group not found
    RAISE EXCEPTION TYPE /aws1/cx_rdsdbprmgrnotfndfault.
ENDTRY.
```

- For API details, see DescribeDBClusterParameters in *Amazon SDK for SAP ABAP API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DescribeDBClusterSnapshots` with an Amazon SDK

The following code examples show how to use `DescribeDBClusterSnapshots`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Return a list of DB snapshots for a particular DB cluster.
    /// </summary>
    /// <param name="dbClusterIdentifier">DB cluster identifier.</param>
    /// <returns>List of DB snapshots.</returns>
    public async Task<List<DBClusterSnapshot>>
DescribeDBClusterSnapshotsByIdentifierAsync(string dbClusterIdentifier)
    {
        var results = new List<DBClusterSnapshot>();

        DescribeDBClusterSnapshotsResponse response;
        DescribeDBClusterSnapshotsRequest request = new
DescribeDBClusterSnapshotsRequest
        {
```

```
            DBClusterIdentifier = dbClusterIdentifier
        };
        // Get the full list if there are multiple pages.
        do
        {
            response = await _amazonRDS.DescribeDBClusterSnapshotsAsync(request);
            results.AddRange(response.DBClusterSnapshots);
            request.Marker = response.Marker;
        }
        while (response.Marker is not null);
        return results;
    }
```

- For API details, see DescribeDBClusterSnapshots in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    Aws::Client::ClientConfiguration clientConfig;
    // Optional: Set to the AWS Region (overrides config file).
    // clientConfig.region = "us-east-1";

Aws::RDS::RDSClient client(clientConfig);

        Aws::RDS::Model::DescribeDBClusterSnapshotsRequest request;
        request.SetDBClusterSnapshotIdentifier(snapshotID);

        Aws::RDS::Model::DescribeDBClusterSnapshotsOutcome outcome =
                client.DescribeDBClusterSnapshots(request);

        if (outcome.IsSuccess()) {
            snapshot = outcome.GetResult().GetDBClusterSnapshots()[0];
        }
        else {
```

```
                std::cerr << "Error with Aurora::DescribeDBClusterSnapshots. "
                          << outcome.GetError().GetMessage()
                          << std::endl;
                cleanUpResources(CLUSTER_PARAMETER_GROUP_NAME,
                                 DB_CLUSTER_IDENTIFIER, DB_INSTANCE_IDENTIFIER,
 client);
                return false;
            }
```

- For API details, see DescribeDBClusterSnapshots in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetClusterSnapshot gets a DB cluster snapshot.
func (clusters *DbClusters) GetClusterSnapshot(ctx context.Context, snapshotName
 string) (*types.DBClusterSnapshot, error) {
```

```
 output, err := clusters.AuroraClient.DescribeDBClusterSnapshots(ctx,
  &rds.DescribeDBClusterSnapshotsInput{
   DBClusterSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBClusterSnapshots[0], nil
 }
}
```

- For API details, see DescribeDBClusterSnapshots in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void waitForSnapshotReady(RdsClient rdsClient, String
dbSnapshotIdentifier,
           String dbInstanceClusterIdentifier) {
       try {
           boolean snapshotReady = false;
           String snapshotReadyStr;
           System.out.println("Waiting for the snapshot to become available.");

           DescribeDbClusterSnapshotsRequest snapshotsRequest =
DescribeDbClusterSnapshotsRequest.builder()
                   .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .build();

           while (!snapshotReady) {
```

```
                DescribeDbClusterSnapshotsResponse response =
 rdsClient.describeDBClusterSnapshots(snapshotsRequest);
                List<DBClusterSnapshot> snapshotList =
 response.dbClusterSnapshots();
                for (DBClusterSnapshot snapshot : snapshotList) {
                    snapshotReadyStr = snapshot.status();
                    if (snapshotReadyStr.contains("available")) {
                        snapshotReady = true;
                    } else {
                        System.out.println(".");
                        Thread.sleep(sleepTime * 5000);
                    }
                }
            }

            System.out.println("The Snapshot is available!");

        } catch (RdsException | InterruptedException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- For API details, see DescribeDBClusterSnapshots in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun waitSnapshotReady(
    dbSnapshotIdentifier: String?,
    dbInstanceClusterIdentifier: String?,
) {
    var snapshotReady = false
    var snapshotReadyStr: String
```

```
    println("Waiting for the snapshot to become available.")

    val snapshotsRequest =
        DescribeDbClusterSnapshotsRequest {
            dbClusterSnapshotIdentifier = dbSnapshotIdentifier
            dbClusterIdentifier = dbInstanceClusterIdentifier
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        while (!snapshotReady) {
            val response = rdsClient.describeDbClusterSnapshots(snapshotsRequest)
            val snapshotList = response.dbClusterSnapshots
            if (snapshotList != null) {
                for (snapshot in snapshotList) {
                    snapshotReadyStr = snapshot.status.toString()
                    if (snapshotReadyStr.contains("available")) {
                        snapshotReady = true
                    } else {
                        println(".")
                        delay(slTime * 5000)
                    }
                }
            }
        }
    }
    println("The Snapshot is available!")
}
```

- For API details, see DescribeDBClusterSnapshots in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
```

```
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def get_cluster_snapshot(self, snapshot_id):
        """
        Gets a DB cluster snapshot.

        :param snapshot_id: The ID of the snapshot to retrieve.
        :return: The retrieved snapshot.
        """
        try:
            response = self.rds_client.describe_db_cluster_snapshots(
                DBClusterSnapshotIdentifier=snapshot_id
            )
            snapshot = response["DBClusterSnapshots"][0]
        except ClientError as err:
            logger.error(
                "Couldn't get DB cluster snapshot %s. Here's why: %s: %s",
                snapshot_id,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return snapshot
```

- For API details, see DescribeDBClusterSnapshots in *Amazon SDK for Python (Boto3) API Reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DescribeDBClusters` with an Amazon SDK

The following code examples show how to use `DescribeDBClusters`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Returns a list of DB clusters.
    /// </summary>
    /// <param name="dbInstanceIdentifier">Optional name of a specific DB
cluster.</param>
    /// <returns>List of DB clusters.</returns>
    public async Task<List<DBCluster>> DescribeDBClustersPagedAsync(string?
dbClusterIdentifier = null)
    {
        var results = new List<DBCluster>();

        DescribeDBClustersResponse response;
        DescribeDBClustersRequest request = new DescribeDBClustersRequest
        {
```

```
            DBClusterIdentifier = dbClusterIdentifier
        };
        // Get the full list if there are multiple pages.
        do
        {
            response = await _amazonRDS.DescribeDBClustersAsync(request);
            if (response.DBClusters != null)
            {
                results.AddRange(response.DBClusters);
            }
            request.Marker = response.Marker;
        }
        while (response.Marker is not null);
        return results;
    }
```

- For API details, see DescribeDBClusters in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);

//! Routine which gets a DB cluster description.
/*!
 \sa describeDBCluster()
 \param dbClusterIdentifier: A DB cluster identifier.
 \param clusterResult: The 'DBCluster' object containing the description.
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
```

```
 */
bool AwsDoc::Aurora::describeDBCluster(const Aws::String &dbClusterIdentifier,
                                       Aws::RDS::Model::DBCluster &clusterResult,
                                       const Aws::RDS::RDSClient &client) {
    Aws::RDS::Model::DescribeDBClustersRequest request;
    request.SetDBClusterIdentifier(dbClusterIdentifier);

    Aws::RDS::Model::DescribeDBClustersOutcome outcome =
            client.DescribeDBClusters(request);

    bool result = true;
    if (outcome.IsSuccess()) {
        clusterResult = outcome.GetResult().GetDBClusters()[0];
    }
    else if (outcome.GetError().GetErrorType() !=
             Aws::RDS::RDSErrors::D_B_CLUSTER_NOT_FOUND_FAULT) {
        result = false;
        std::cerr << "Error with Aurora::GDescribeDBClusters. "
                  << outcome.GetError().GetMessage()
                  << std::endl;
    }
        // This example does not log an error if the DB cluster does not exist.
        // Instead, clusterResult is set to empty.
    else {
        clusterResult = Aws::RDS::Model::DBCluster();
    }

    return result;

}
```

- For API details, see DescribeDBClusters in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetDbCluster gets data about an Aurora DB cluster.
func (clusters *DbClusters) GetDbCluster(ctx context.Context, clusterName string)
 (*types.DBCluster, error) {
 output, err := clusters.AuroraClient.DescribeDBClusters(ctx,
  &rds.DescribeDBClustersInput{
   DBClusterIdentifier: aws.String(clusterName),
  })
 if err != nil {
  var notFoundError *types.DBClusterNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB cluster %v does not exist.\n", clusterName)
   err = nil
  } else {
   log.Printf("Couldn't get DB cluster %v: %v\n", clusterName, err)
  }
  return nil, err
 } else {
  return &output.DBClusters[0], err
 }
}
```

- For API details, see DescribeDBClusters in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void describeDbClusterParameters(RdsClient rdsClient, String
dbCLusterGroupName, int flag) {
       try {
           DescribeDbClusterParametersRequest dbParameterGroupsRequest;
           if (flag == 0) {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .build();
           } else {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .source("user")
                       .build();
           }

           DescribeDbClusterParametersResponse response = rdsClient
                   .describeDBClusterParameters(dbParameterGroupsRequest);
           List<Parameter> dbParameters = response.parameters();
           String paraName;
           for (Parameter para : dbParameters) {
               // Only print out information about either auto_increment_offset
or
               // auto_increment_increment.
               paraName = para.parameterName();
               if ((paraName.compareTo("auto_increment_offset") == 0)
                       || (paraName.compareTo("auto_increment_increment ") ==
0)) {
                   System.out.println("*** The parameter name is  " + paraName);
                   System.out.println("*** The parameter value is  " +
para.parameterValue());
```

```
                    System.out.println("*** The parameter data type is " +
 para.dataType());
                    System.out.println("*** The parameter description is " +
 para.description());
                    System.out.println("*** The parameter allowed values  is " +
 para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- For API details, see DescribeDBClusters in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun describeDbClusterParameters(
    dbCLusterGroupName: String?,
    flag: Int,
) {
    val dbParameterGroupsRequest: DescribeDbClusterParametersRequest
    dbParameterGroupsRequest =
        if (flag == 0) {
            DescribeDbClusterParametersRequest {
                dbClusterParameterGroupName = dbCLusterGroupName
            }
        } else {
            DescribeDbClusterParametersRequest {
                dbClusterParameterGroupName = dbCLusterGroupName
                source = "user"
```

```
            }
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response =
 rdsClient.describeDbClusterParameters(dbParameterGroupsRequest)
        response.parameters?.forEach { para ->
            // Only print out information about either auto_increment_offset or
 auto_increment_increment.
            val paraName = para.parameterName
            if (paraName != null) {
                if (paraName.compareTo("auto_increment_offset") == 0 ||
 paraName.compareTo("auto_increment_increment ") == 0) {
                    println("*** The parameter name is  $paraName")
                    println("*** The parameter value is  ${para.parameterValue}")
                    println("*** The parameter data type is ${para.dataType}")
                    println("*** The parameter description is
 ${para.description}")
                    println("*** The parameter allowed values  is
 ${para.allowedValues}")
                }
            }
        }
    }
}
```

- For API details, see DescribeDBClusters in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""
```

```
    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def get_db_cluster(self, cluster_name):
        """
        Gets data about an Aurora DB cluster.

        :param cluster_name: The name of the DB cluster to retrieve.
        :return: The retrieved DB cluster.
        """
        try:
            response = self.rds_client.describe_db_clusters(
                DBClusterIdentifier=cluster_name
            )
            cluster = response["DBClusters"][0]
        except ClientError as err:
            if err.response["Error"]["Code"] == "DBClusterNotFoundFault":
                logger.info("Cluster %s does not exist.", cluster_name)
            else:
                logger.error(
                    "Couldn't verify the existence of DB cluster %s. Here's why:
%s: %s",
                    cluster_name,
                    err.response["Error"]["Code"],
                    err.response["Error"]["Message"],
                )
                raise
        else:
            return cluster
```

- For API details, see DescribeDBClusters in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   // Get a list of allowed engine versions.
rds.DescribeDbEngineVersions(Engine='aurora-mysql', DBParameterGroupFamily=<the
family used to create your parameter group in step 2>)
   // Create an Aurora DB cluster database cluster that contains a MySql
database and uses the parameter group you created.
   // Wait for DB cluster to be ready. Call rds.DescribeDBClusters and check for
Status == 'available'.
   // Get a list of instance classes available for the selected engine
and engine version. rds.DescribeOrderableDbInstanceOptions(Engine='mysql',
EngineVersion=).

   // Create a database instance in the cluster.
   // Wait for DB instance to be ready. Call rds.DescribeDbInstances and check
for DBInstanceStatus == 'available'.
   pub async fn start_cluster_and_instance(&mut self) -> Result<(),
ScenarioError> {
       if self.password.is_none() {
           return Err(ScenarioError::with(
               "Must set Secret Password before starting a cluster",
           ));
       }
       let create_db_cluster = self
           .rds
           .create_db_cluster(
               DB_CLUSTER_IDENTIFIER,
               DB_CLUSTER_PARAMETER_GROUP_NAME,
               DB_ENGINE,
               self.engine_version.as_deref().expect("engine version"),
```

```
                self.username.as_deref().expect("username"),
                self.password
                    .replace(SecretString::new("".to_string()))
                    .expect("password"),
            )
            .await;
        if let Err(err) = create_db_cluster {
            return Err(ScenarioError::new(
                "Failed to create DB Cluster with cluster group",
                &err,
            ));
        }

        self.db_cluster_identifier = create_db_cluster
            .unwrap()
            .db_cluster
            .and_then(|c| c.db_cluster_identifier);

        if self.db_cluster_identifier.is_none() {
            return Err(ScenarioError::with("Created DB Cluster missing
Identifier"));
        }

        info!(
            "Started a db cluster: {}",
            self.db_cluster_identifier
                .as_deref()
                .unwrap_or("Missing ARN")
        );

        let create_db_instance = self
            .rds
            .create_db_instance(
                self.db_cluster_identifier.as_deref().expect("cluster name"),
                DB_INSTANCE_IDENTIFIER,
                self.instance_class.as_deref().expect("instance class"),
                DB_ENGINE,
            )
            .await;
        if let Err(err) = create_db_instance {
            return Err(ScenarioError::new(
                "Failed to create Instance in DB Cluster",
                &err,
            ));
```

```
        }

        self.db_instance_identifier = create_db_instance
            .unwrap()
            .db_instance
            .and_then(|i| i.db_instance_identifier);

        // Cluster creation can take up to 20 minutes to become available
        let cluster_max_wait = Duration::from_secs(20 * 60);
        let waiter = Waiter::builder().max(cluster_max_wait).build();
        while waiter.sleep().await.is_ok() {
            let cluster = self
                .rds
                .describe_db_clusters(
                    self.db_cluster_identifier
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = cluster {
                warn!(?err, "Failed to describe cluster while waiting for
ready");
                continue;
            }

            let instance = self
                .rds
                .describe_db_instance(
                    self.db_instance_identifier
                        .as_deref()
                        .expect("instance identifier"),
                )
                .await;
            if let Err(err) = instance {
                return Err(ScenarioError::new(
                    "Failed to find instance for cluster",
                    &err,
                ));
            }

            let instances_available = instance
                .unwrap()
                .db_instances()
```

```
                .iter()
                .all(|instance| instance.db_instance_status() ==
Some("Available"));

            let endpoints = self
                .rds
                .describe_db_cluster_endpoints(
                    self.db_cluster_identifier
                        .as_deref()
                        .expect("cluster identifier"),
                )
                .await;

            if let Err(err) = endpoints {
                return Err(ScenarioError::new(
                    "Failed to find endpoint for cluster",
                    &err,
                ));
            }

            let endpoints_available = endpoints
                .unwrap()
                .db_cluster_endpoints()
                .iter()
                .all(|endpoint| endpoint.status() == Some("available"));

            if instances_available && endpoints_available {
                return Ok(());
            }
        }

        Err(ScenarioError::with("timed out waiting for cluster"))
    }

    pub async fn describe_db_clusters(
        &self,
        id: &str,
    ) -> Result<DescribeDbClustersOutput, SdkError<DescribeDBClustersError>> {
        self.inner
            .describe_db_clusters()
            .db_cluster_identifier(id)
            .send()
            .await
    }
```

```
#[tokio::test]
async fn test_start_cluster_and_instance() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });
```

```
    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });

    mock_rds
        .expect_describe_db_instance()
        .with(eq("RustSDKCodeExamplesDBInstance"))
        .return_once(|name| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_instance_identifier(name)
                        .db_instance_status("Available")
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

.db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
```

```
        assert!(scenario
            .password
            .replace(SecretString::new("BAD SECRET".into()))
            .unwrap()
            .expose_secret()
            .is_empty());
        assert_eq!(
            scenario.db_cluster_identifier,
            Some("RustSDKCodeExamplesDBCluster".into())
        );
    });
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Err(SdkError::service_error(
                CreateDBClusterError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db cluster error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _}) if message
 == "Failed to create DB Cluster with cluster group")
}
```

```
#[tokio::test]
async fn test_start_cluster_and_instance_cluster_create_missing_id() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .return_once(|_, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()
                .db_cluster(DbCluster::builder().build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context:_ }) if message
 == "Created DB Cluster missing Identifier");
}

#[tokio::test]
async fn test_start_cluster_and_instance_instance_create_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
                .build())
        });
```

```
    mock_rds
        .expect_create_db_instance()
        .return_once(|_, _, _, _| {
            Err(SdkError::service_error(
                CreateDBInstanceError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "create db instance error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    let create = scenario.start_cluster_and_instance().await;
    assert_matches!(create, Err(ScenarioError { message, context: _ }) if message
 == "Failed to create Instance in DB Cluster")
}

#[tokio::test]
async fn test_start_cluster_and_instance_wait_hiccup() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster()
        .withf(|id, params, engine, version, username, password| {
            assert_eq!(id, "RustSDKCodeExamplesDBCluster");
            assert_eq!(params, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(engine, "aurora-mysql");
            assert_eq!(version, "aurora-mysql8.0");
            assert_eq!(username, "test username");
            assert_eq!(password.expose_secret(), "test password");
            true
        })
        .return_once(|id, _, _, _, _, _| {
            Ok(CreateDbClusterOutput::builder()

 .db_cluster(DbCluster::builder().db_cluster_identifier(id).build())
```

```
                .build())
        });

    mock_rds
        .expect_create_db_instance()
        .withf(|cluster, name, class, engine| {
            assert_eq!(cluster, "RustSDKCodeExamplesDBCluster");
            assert_eq!(name, "RustSDKCodeExamplesDBInstance");
            assert_eq!(class, "m5.large");
            assert_eq!(engine, "aurora-mysql");
            true
        })
        .return_once(|cluster, name, class, _| {
            Ok(CreateDbInstanceOutput::builder()
                .db_instance(
                    DbInstance::builder()
                        .db_cluster_identifier(cluster)
                        .db_instance_identifier(name)
                        .db_instance_class(class)
                        .build(),
                )
                .build())
        });

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe cluster error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        })
        .with(eq("RustSDKCodeExamplesDBCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()

.db_clusters(DbCluster::builder().db_cluster_identifier(id).build())
```

```
                .build())
        });

    mock_rds.expect_describe_db_instance().return_once(|name| {
        Ok(DescribeDbInstancesOutput::builder()
            .db_instances(
                DbInstance::builder()
                    .db_instance_identifier(name)
                    .db_instance_status("Available")
                    .build(),
            )
            .build())
    });

    mock_rds
        .expect_describe_db_cluster_endpoints()
        .return_once(|_| {
            Ok(DescribeDbClusterEndpointsOutput::builder()

 .db_cluster_endpoints(DbClusterEndpoint::builder().status("available").build())
                .build())
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_version = Some("aurora-mysql8.0".into());
    scenario.instance_class = Some("m5.large".into());
    scenario.username = Some("test username".into());
    scenario.password = Some(SecretString::new("test password".into()));

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let create = scenario.start_cluster_and_instance().await;
        assert!(create.is_ok());
    });

    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::advance(Duration::from_secs(1)).await;
    tokio::time::resume();
    let _ = assertions.await;
}
```

- For API details, see DescribeDBClusters in *Amazon SDK for Rust API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DescribeDBEngineVersions` with an Amazon SDK

The following code examples show how to use `DescribeDBEngineVersions`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Get a list of DB engine versions for a particular DB engine.
    /// </summary>
    /// <param name="engine">The name of the engine.</param>
    /// <param name="parameterGroupFamily">Optional parameter group family
name.</param>
    /// <returns>A list of DBEngineVersions.</returns>
    public async Task<List<DBEngineVersion>>
DescribeDBEngineVersionsForEngineAsync(string engine,
        string? parameterGroupFamily = null)
    {
        var response = await _amazonRDS.DescribeDBEngineVersionsAsync(
            new DescribeDBEngineVersionsRequest()
            {
                Engine = engine,
                DBParameterGroupFamily = parameterGroupFamily
            });
        return response.DBEngineVersions;
```

```
    }
```

- For API details, see DescribeDBEngineVersions in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);


//! Routine which gets available DB engine versions for an engine name and
//! an optional parameter group family.
/*!
 \sa getDBEngineVersions()
 \param engineName: A DB engine name.
 \param parameterGroupFamily: A parameter group family name, ignored if empty.
 \param engineVersionsResult: Vector of 'DBEngineVersion' objects returned by the
 routine.
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
 */
bool AwsDoc::Aurora::getDBEngineVersions(const Aws::String &engineName,
                                         const Aws::String &parameterGroupFamily,

 Aws::Vector<Aws::RDS::Model::DBEngineVersion> &engineVersionsResult,
                                         const Aws::RDS::RDSClient &client) {
    Aws::RDS::Model::DescribeDBEngineVersionsRequest request;
    request.SetEngine(engineName);
    if (!parameterGroupFamily.empty()) {
        request.SetDBParameterGroupFamily(parameterGroupFamily);
```

```
    }

    engineVersionsResult.clear();
    Aws::String marker; // The marker is used for pagination.
    do {
        if (!marker.empty()) {
            request.SetMarker(marker);
        }

        Aws::RDS::Model::DescribeDBEngineVersionsOutcome outcome =
                client.DescribeDBEngineVersions(request);

        if (outcome.IsSuccess()) {
            const Aws::Vector<Aws::RDS::Model::DBEngineVersion> &engineVersions =
                    outcome.GetResult().GetDBEngineVersions();

            engineVersionsResult.insert(engineVersionsResult.end(),
                                        engineVersions.begin(),
 engineVersions.end());
            marker  = outcome.GetResult().GetMarker();
        }
        else {
            std::cerr << "Error with Aurora::DescribeDBEngineVersionsRequest. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
        }
    } while (!marker.empty());

    return true;
}
```

- For API details, see DescribeDBEngineVersions in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (clusters *DbClusters) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := clusters.AuroraClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
}
```

- For API details, see DescribeDBEngineVersions in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void describeDBEngines(RdsClient rdsClient) {
       try {
           DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                   .engine("aurora-mysql")
                   .defaultOnly(true)
                   .maxRecords(20)
                   .build();

           DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
           List<DBEngineVersion> engines = response.dbEngineVersions();

           // Get all DBEngineVersion objects.
           for (DBEngineVersion engineOb : engines) {
               System.out.println("The name of the DB parameter group family for
the database engine is "
                       + engineOb.dbParameterGroupFamily());
               System.out.println("The name of the database engine " +
engineOb.engine());
               System.out.println("The version number of the database engine " +
engineOb.engineVersion());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- For API details, see DescribeDBEngineVersions in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
// Get a list of allowed engine versions.
suspend fun getAllowedClusterEngines(dbParameterGroupFamilyVal: String?) {
    val versionsRequest =
        DescribeDbEngineVersionsRequest {
            dbParameterGroupFamily = dbParameterGroupFamilyVal
            engine = "aurora-mysql"
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.describeDbEngineVersions(versionsRequest)
        response.dbEngineVersions?.forEach { dbEngine ->
            println("The engine version is ${dbEngine.engineVersion}")
            println("The engine description is ${dbEngine.dbEngineDescription}")
        }
    }
}
```

- For API details, see DescribeDBEngineVersions in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def get_engine_versions(self, engine, parameter_group_family=None):
        """
        Gets database engine versions that are available for the specified engine
        and parameter group family.

        :param engine: The database engine to look up.
        :param parameter_group_family: When specified, restricts the returned
 list of
                                       engine versions to those that are
 compatible with
                                       this parameter group family.
        :return: The list of database engine versions.
        """
        try:
            kwargs = {"Engine": engine}
            if parameter_group_family is not None:
                kwargs["DBParameterGroupFamily"] = parameter_group_family
            response = self.rds_client.describe_db_engine_versions(**kwargs)
            versions = response["DBEngineVersions"]
        except ClientError as err:
            logger.error(
                "Couldn't get engine versions for %s. Here's why: %s: %s",
                engine,
                err.response["Error"]["Code"],
```

```
                err.response["Error"]["Message"],
            )
            raise
        else:
            return versions
```

- For API details, see DescribeDBEngineVersions in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   // Get available engine families for Aurora MySql.
rds.DescribeDbEngineVersions(Engine='aurora-mysql') and build a set of the
'DBParameterGroupFamily' field values. I get {aurora-mysql8.0, aurora-mysql5.7}.
   pub async fn get_engines(&self) -> Result<HashMap<String, Vec<String>>,
ScenarioError> {
       let describe_db_engine_versions =
self.rds.describe_db_engine_versions(DB_ENGINE).await;
       trace!(versions=?describe_db_engine_versions, "full list of versions");

       if let Err(err) = describe_db_engine_versions {
           return Err(ScenarioError::new(
               "Failed to retrieve DB Engine Versions",
               &err,
           ));
       };

       let version_count = describe_db_engine_versions
           .as_ref()
           .map(|o| o.db_engine_versions().len())
           .unwrap_or_default();
```

```
        info!(version_count, "got list of versions");

        // Create a map of engine families to their available versions.
        let mut versions = HashMap::<String, Vec<String>>::new();
        describe_db_engine_versions
            .unwrap()
            .db_engine_versions()
            .iter()
            .filter_map(
                |v| match (&v.db_parameter_group_family, &v.engine_version) {
                    (Some(family), Some(version)) => Some((family.clone(),
 version.clone())),
                    _ => None,
                },
            )
            .for_each(|(family, version)|
 versions.entry(family).or_default().push(version));

        Ok(versions)
    }

    pub async fn describe_db_engine_versions(
        &self,
        engine: &str,
    ) -> Result<DescribeDbEngineVersionsOutput,
 SdkError<DescribeDBEngineVersionsError>> {
        self.inner
            .describe_db_engine_versions()
            .engine(engine)
            .send()
            .await
    }

#[tokio::test]
async fn test_scenario_get_engines() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_engine_versions()
        .with(eq("aurora-mysql"))
        .return_once(|_| {
            Ok(DescribeDbEngineVersionsOutput::builder()
                .db_engine_versions(
                    DbEngineVersion::builder()
```

```
                        .db_parameter_group_family("f1")
                        .engine_version("f1a")
                        .build(),
                )
                .db_engine_versions(
                    DbEngineVersion::builder()
                        .db_parameter_group_family("f1")
                        .engine_version("f1b")
                        .build(),
                )
                .db_engine_versions(
                    DbEngineVersion::builder()
                        .db_parameter_group_family("f2")
                        .engine_version("f2a")
                        .build(),
                )
                .db_engine_versions(DbEngineVersion::builder().build())
                .build())
        });

    let scenario = AuroraScenario::new(mock_rds);

    let versions_map = scenario.get_engines().await;

    assert_eq!(
        versions_map,
        Ok(HashMap::from([
            ("f1".into(), vec!["f1a".into(), "f1b".into()]),
            ("f2".into(), vec!["f2a".into()])
        ]))
    );
}

#[tokio::test]
async fn test_scenario_get_engines_failed() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_db_engine_versions()
        .with(eq("aurora-mysql"))
        .return_once(|_| {
            Err(SdkError::service_error(
                DescribeDBEngineVersionsError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
```

```
                    "describe_db_engine_versions error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let scenario = AuroraScenario::new(mock_rds);

    let versions_map = scenario.get_engines().await;
    assert_matches!(
        versions_map,
        Err(ScenarioError { message, context: _ }) if message == "Failed to
 retrieve DB Engine Versions"
    );
}
```

- For API details, see DescribeDBEngineVersions in *Amazon SDK for Rust API reference*.

SAP ABAP

SDK for SAP ABAP

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    " iv_engine                 = 'mysql'
    " iv_dbparametergroupfamily = 'mysql8.0' (optional - filters by parameter
 group family)
    TRY.
        oo_result = lo_rds->describedbengineversions(
          iv_engine                 = iv_engine
          iv_dbparametergroupfamily = iv_dbparametergroupfamily ).
        DATA(lv_version_count) = lines( oo_result->get_dbengineversions( ) ).
        MESSAGE |Retrieved { lv_version_count } engine versions.| TYPE 'I'.
    ENDTRY.
```

- For API details, see DescribeDBEngineVersions in *Amazon SDK for SAP ABAP API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DescribeDBInstances` with an Amazon SDK

The following code examples show how to use `DescribeDBInstances`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Returns a list of DB instances.
    /// </summary>
    /// <param name="dbInstanceIdentifier">Optional name of a specific DB
instance.</param>
    /// <returns>List of DB instances.</returns>
    public async Task<List<DBInstance>> DescribeDBInstancesPagedAsync(string?
dbInstanceIdentifier = null)
    {
        var results = new List<DBInstance>();
        var instancesPaginator = _amazonRDS.Paginators.DescribeDBInstances(
            new DescribeDBInstancesRequest
            {
                DBInstanceIdentifier = dbInstanceIdentifier
            });
```

```
        // Get the entire list using the paginator.
        await foreach (var instances in instancesPaginator.DBInstances)
        {
            results.Add(instances);
        }
        return results;
    }
```

- For API details, see DescribeDBInstances in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);


//! Routine which gets a DB instance description.
/*!
 \sa describeDBCluster()
 \param dbInstanceIdentifier: A DB instance identifier.
 \param instanceResult: The 'DBInstance' object containing the description.
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
 */
bool AwsDoc::Aurora::describeDBInstance(const Aws::String &dbInstanceIdentifier,
                                        Aws::RDS::Model::DBInstance
 &instanceResult,
                                        const Aws::RDS::RDSClient &client) {
    Aws::RDS::Model::DescribeDBInstancesRequest request;
    request.SetDBInstanceIdentifier(dbInstanceIdentifier);
```

```
    Aws::RDS::Model::DescribeDBInstancesOutcome outcome =
            client.DescribeDBInstances(request);

    bool result = true;
    if (outcome.IsSuccess()) {
        instanceResult = outcome.GetResult().GetDBInstances()[0];
    }
    else if (outcome.GetError().GetErrorType() !=
             Aws::RDS::RDSErrors::D_B_INSTANCE_NOT_FOUND_FAULT) {
        result = false;
        std::cerr << "Error with Aurora::DescribeDBInstances. "
                  << outcome.GetError().GetMessage()
                  << std::endl;
    }
        // This example does not log an error if the DB instance does not exist.
        // Instead, instanceResult is set to empty.
    else {
        instanceResult = Aws::RDS::Model::DBInstance();
    }

    return result;
}
```

- For API details, see DescribeDBInstances in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetInstance gets data about a DB instance.
func (clusters *DbClusters) GetInstance(ctx context.Context, instanceName string)
 (
 *types.DBInstance, error) {
 output, err := clusters.AuroraClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
 } else {
  return &output.DBInstances[0], nil
 }
}
```

- For API details, see DescribeDBInstances in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   // Waits until the database instance is available.
   public static void waitForInstanceReady(RdsClient rdsClient, String
dbClusterIdentifier) {
       boolean instanceReady = false;
       String instanceReadyStr;
       System.out.println("Waiting for instance to become available.");
       try {
           DescribeDbClustersRequest instanceRequest =
DescribeDbClustersRequest.builder()
                   .dbClusterIdentifier(dbClusterIdentifier)
                   .build();

           while (!instanceReady) {
               DescribeDbClustersResponse response =
rdsClient.describeDBClusters(instanceRequest);
               List<DBCluster> clusterList = response.dbClusters();
               for (DBCluster cluster : clusterList) {
                   instanceReadyStr = cluster.status();
                   if (instanceReadyStr.contains("available")) {
                       instanceReady = true;
                   } else {
                       System.out.print(".");
                       Thread.sleep(sleepTime * 1000);
                   }
               }
           }
           System.out.println("Database cluster is available!");

       } catch (RdsException | InterruptedException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
```

```
    }
```

- For API details, see DescribeDBInstances in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
suspend fun waitDBAuroraInstanceReady(dbInstanceIdentifierVal: String?) {
    var instanceReady = false
    var instanceReadyStr: String
    println("Waiting for instance to become available.")
    val instanceRequest =
        DescribeDbInstancesRequest {
            dbInstanceIdentifier = dbInstanceIdentifierVal
        }

    var endpoint = ""
    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        while (!instanceReady) {
            val response = rdsClient.describeDbInstances(instanceRequest)
            response.dbInstances?.forEach { instance ->
                instanceReadyStr = instance.dbInstanceStatus.toString()
                if (instanceReadyStr.contains("available")) {
                    endpoint = instance.endpoint?.address.toString()
                    instanceReady = true
                } else {
                    print(".")
                    delay(sleepTime * 1000)
                }
            }
        }
    }
    println("Database instance is available! The connection endpoint is
 $endpoint")
```

```
}
```

- For API details, see DescribeDBInstances in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def get_db_instance(self, instance_id):
        """
        Gets data about a DB instance.

        :param instance_id: The ID of the DB instance to retrieve.
        :return: The retrieved DB instance.
        """
        try:
```

```
            response = self.rds_client.describe_db_instances(
                DBInstanceIdentifier=instance_id
            )
            db_inst = response["DBInstances"][0]
        except ClientError as err:
            if err.response["Error"]["Code"] == "DBInstanceNotFound":
                logger.info("Instance %s does not exist.", instance_id)
            else:
                logger.error(
                    "Couldn't get DB instance %s. Here's why: %s: %s",
                    instance_id,
                    err.response["Error"]["Code"],
                    err.response["Error"]["Message"],
                )
                raise
        else:
            return db_inst
```

- For API details, see DescribeDBInstances in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    pub async fn clean_up(self) -> Result<(), Vec<ScenarioError>> {
        let mut clean_up_errors: Vec<ScenarioError> = vec![];

        // Delete the instance. rds.DeleteDbInstance.
        let delete_db_instance = self
            .rds
            .delete_db_instance(
                self.db_instance_identifier
                    .as_deref()
                    .expect("instance identifier"),
```

```
            )
            .await;
        if let Err(err) = delete_db_instance {
            let identifier = self
                .db_instance_identifier
                .as_deref()
                .unwrap_or("Missing Instance Identifier");
            let message = format!("failed to delete db instance {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance to delete
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_instances =
self.rds.describe_db_instances().await;
                if let Err(err) = describe_db_instances {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check instance state during deletion",
                        &err,
                    ));
                    break;
                }
                let db_instances = describe_db_instances
                    .unwrap()
                    .db_instances()
                    .iter()
                    .filter(|instance| instance.db_cluster_identifier ==
self.db_cluster_identifier)
                    .cloned()
                    .collect::<Vec<DbInstance>>();

                if db_instances.is_empty() {
                    trace!("Delete Instance waited and no instances were found");
                    break;
                }
                match db_instances.first().unwrap().db_instance_status() {
                    Some("Deleting") => continue,
                    Some(status) => {
                        info!("Attempting to delete but instances is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB instance");
```

```
                        break;
                    }
                }
            }
        }

        // Delete the DB cluster. rds.DeleteDbCluster.
        let delete_db_cluster = self
            .rds
            .delete_db_cluster(
                self.db_cluster_identifier
                    .as_deref()
                    .expect("cluster identifier"),
            )
            .await;

        if let Err(err) = delete_db_cluster {
            let identifier = self
                .db_cluster_identifier
                .as_deref()
                .unwrap_or("Missing DB Cluster Identifier");
            let message = format!("failed to delete db cluster {identifier}");
            clean_up_errors.push(ScenarioError::new(message, &err));
        } else {
            // Wait for the instance and cluster to fully delete.
rds.DescribeDbInstances and rds.DescribeDbClusters until both are not found.
            let waiter = Waiter::default();
            while waiter.sleep().await.is_ok() {
                let describe_db_clusters = self
                    .rds
                    .describe_db_clusters(
                        self.db_cluster_identifier
                            .as_deref()
                            .expect("cluster identifier"),
                    )
                    .await;
                if let Err(err) = describe_db_clusters {
                    clean_up_errors.push(ScenarioError::new(
                        "Failed to check cluster state during deletion",
                        &err,
                    ));
                    break;
                }
                let describe_db_clusters = describe_db_clusters.unwrap();
```

```
                let db_clusters = describe_db_clusters.db_clusters();
                if db_clusters.is_empty() {
                    trace!("Delete cluster waited and no clusters were found");
                    break;
                }
                match db_clusters.first().unwrap().status() {
                    Some("Deleting") => continue,
                    Some(status) => {
                        info!("Attempting to delete but clusters is in
{status}");
                        continue;
                    }
                    None => {
                        warn!("No status for DB cluster");
                        break;
                    }
                }
            }
        }

        // Delete the DB cluster parameter group.
rds.DeleteDbClusterParameterGroup.
        let delete_db_cluster_parameter_group = self
            .rds
            .delete_db_cluster_parameter_group(
                self.db_cluster_parameter_group
                    .map(|g| {
                        g.db_cluster_parameter_group_name
                            .unwrap_or_else(||
DB_CLUSTER_PARAMETER_GROUP_NAME.to_string())
                    })
                    .as_deref()
                    .expect("cluster parameter group name"),
            )
            .await;
        if let Err(error) = delete_db_cluster_parameter_group {
            clean_up_errors.push(ScenarioError::new(
                "Failed to delete the db cluster parameter group",
                &error,
            ))
        }

        if clean_up_errors.is_empty() {
            Ok(())
```

```
        } else {
            Err(clean_up_errors)
        }
    }

    pub async fn describe_db_instances(
        &self,
    ) -> Result<DescribeDbInstancesOutput, SdkError<DescribeDBInstancesError>> {
        self.inner.describe_db_instances().send().await
    }

#[tokio::test]
async fn test_scenario_clean_up() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
                .build())
        })
        .with()
        .times(1)
        .returning(|| Ok(DescribeDbInstancesOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster()
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));

    mock_rds
```

```
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| Ok(DescribeDbClustersOutput::builder().build()));

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
            .build(),
    );

    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_ok());
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
Describe Cluster
```

```
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Cluster
    tokio::time::resume();
    let _ = assertions.await;
}

#[tokio::test]
async fn test_scenario_clean_up_errors() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_delete_db_instance()
        .with(eq("MockInstance"))
        .return_once(|_| Ok(DeleteDbInstanceOutput::builder().build()));

    mock_rds
        .expect_describe_db_instances()
        .with()
        .times(1)
        .returning(|| {
            Ok(DescribeDbInstancesOutput::builder()
                .db_instances(
                    DbInstance::builder()
                        .db_cluster_identifier("MockCluster")
                        .db_instance_status("Deleting")
                        .build(),
                )
                .build())
        })
        .with()
        .times(1)
        .returning(|| {
            Err(SdkError::service_error(
                DescribeDBInstancesError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db instances error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    mock_rds
        .expect_delete_db_cluster()
```

```
        .with(eq("MockCluster"))
        .return_once(|_| Ok(DeleteDbClusterOutput::builder().build()));

    mock_rds
        .expect_describe_db_clusters()
        .with(eq("MockCluster"))
        .times(1)
        .returning(|id| {
            Ok(DescribeDbClustersOutput::builder()
                .db_clusters(
                    DbCluster::builder()
                        .db_cluster_identifier(id)
                        .status("Deleting")
                        .build(),
                )
                .build())
        })
        .with(eq("MockCluster"))
        .times(1)
        .returning(|_| {
            Err(SdkError::service_error(
                DescribeDBClustersError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "describe db clusters error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
SdkBody::empty()),
            ))
        });

    mock_rds
        .expect_delete_db_cluster_parameter_group()
        .with(eq("MockParamGroup"))
        .return_once(|_|
Ok(DeleteDbClusterParameterGroupOutput::builder().build()));

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.db_cluster_identifier = Some(String::from("MockCluster"));
    scenario.db_instance_identifier = Some(String::from("MockInstance"));
    scenario.db_cluster_parameter_group = Some(
        DbClusterParameterGroup::builder()
            .db_cluster_parameter_group_name("MockParamGroup")
            .build(),
    );
```

```
    tokio::time::pause();
    let assertions = tokio::spawn(async move {
        let clean_up = scenario.clean_up().await;
        assert!(clean_up.is_err());
        let errs = clean_up.unwrap_err();
        assert_eq!(errs.len(), 2);
        assert_matches!(errs.first(), Some(ScenarioError {message, context: _})
 if message == "Failed to check instance state during deletion");
        assert_matches!(errs.get(1), Some(ScenarioError {message, context: _}) if
 message == "Failed to check cluster state during deletion");
    });

    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Instances
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for first
 Describe Cluster
    tokio::time::advance(Duration::from_secs(1)).await; // Wait for second
 Describe Cluster
    tokio::time::resume();
    let _ = assertions.await;
}
```

- For API details, see DescribeDBInstances in *Amazon SDK for Rust API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `DescribeOrderableDBInstanceOptions` with an Amazon SDK or CLI

The following code examples show how to use `DescribeOrderableDBInstanceOptions`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Get a list of orderable DB instance options for a specific
    /// engine and engine version.
    /// </summary>
    /// <param name="engine">Name of the engine.</param>
    /// <param name="engineVersion">Version of the engine.</param>
    /// <returns>List of OrderableDBInstanceOptions.</returns>
    public async Task<List<OrderableDBInstanceOption>>
DescribeOrderableDBInstanceOptionsPagedAsync(string engine, string
engineVersion)
    {
        // Use a paginator to get a list of DB instance options.
        var results = new List<OrderableDBInstanceOption>();
        var paginateInstanceOptions =
_amazonRDS.Paginators.DescribeOrderableDBInstanceOptions(
            new DescribeOrderableDBInstanceOptionsRequest()
            {
                Engine = engine,
                EngineVersion = engineVersion,
            });
        // Get the entire list using the paginator.
        await foreach (var instanceOptions in
paginateInstanceOptions.OrderableDBInstanceOptions)
        {
            results.Add(instanceOptions);
        }
        return results;
    }
```

- For API details, see DescribeOrderableDBInstanceOptions in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);


//! Routine which gets available DB instance classes, displays the list
//! to the user, and returns the user selection.
/*!
 \sa chooseDBInstanceClass()
 \param engineName: The DB engine name.
 \param engineVersion: The DB engine version.
 \param dbInstanceClass: String for DB instance class chosen by the user.
 \param client: 'RDSClient' instance.
 \return bool: Successful completion.
 */
bool AwsDoc::Aurora::chooseDBInstanceClass(const Aws::String &engine,
                                           const Aws::String &engineVersion,
                                           Aws::String &dbInstanceClass,
                                           const Aws::RDS::RDSClient &client) {
    std::vector<Aws::String> instanceClasses;
    Aws::String marker; // The marker is used for pagination.
    do {
        Aws::RDS::Model::DescribeOrderableDBInstanceOptionsRequest request;
        request.SetEngine(engine);
        request.SetEngineVersion(engineVersion);
        if (!marker.empty()) {
            request.SetMarker(marker);
        }

        Aws::RDS::Model::DescribeOrderableDBInstanceOptionsOutcome outcome =
```

```
                client.DescribeOrderableDBInstanceOptions(request);

        if (outcome.IsSuccess()) {
            const Aws::Vector<Aws::RDS::Model::OrderableDBInstanceOption>
 &options =
                    outcome.GetResult().GetOrderableDBInstanceOptions();
            for (const Aws::RDS::Model::OrderableDBInstanceOption &option:
 options) {
                const Aws::String &instanceClass = option.GetDBInstanceClass();
                if (std::find(instanceClasses.begin(), instanceClasses.end(),
                              instanceClass) == instanceClasses.end()) {
                    instanceClasses.push_back(instanceClass);
                }
            }
            marker = outcome.GetResult().GetMarker();
        }
        else {
            std::cerr << "Error with Aurora::DescribeOrderableDBInstanceOptions.
 "
                      << outcome.GetError().GetMessage()
                      << std::endl;
            return false;
        }
    } while (!marker.empty());

    std::cout << "The available DB instance classes for your database engine
 are:"
              << std::endl;
    for (int i = 0; i < instanceClasses.size(); ++i) {
        std::cout << "   " << i + 1 << ": " << instanceClasses[i] << std::endl;
    }

    int choice = askQuestionForIntRange(
            "Which DB instance class do you want to use? ",
            1, static_cast<int>(instanceClasses.size()));
    dbInstanceClass = instanceClasses[choice - 1];
    return true;
}
```

- For API details, see DescribeOrderableDBInstanceOptions in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
// compatible with a set of specifications.
func (clusters *DbClusters) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {

 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instances []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(clusters.AuroraClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
   EngineVersion: aws.String(engineVersion),
```

```
 })
 for orderablePaginator.HasMorePages() {
  output, err = orderablePaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get orderable DB instances: %v\n", err)
   break
  } else {
   instances = append(instances, output.OrderableDBInstanceOptions...)
  }
 }
 return instances, err
}
```

- For API details, see DescribeOrderableDBInstanceOptions in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    public static void describeDBEngines(RdsClient rdsClient) {
        try {
            DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                    .engine("aurora-mysql")
                    .defaultOnly(true)
                    .maxRecords(20)
                    .build();

            DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
            List<DBEngineVersion> engines = response.dbEngineVersions();
```

```
            // Get all DBEngineVersion objects.
            for (DBEngineVersion engineOb : engines) {
                System.out.println("The name of the DB parameter group family for
 the database engine is "
                        + engineOb.dbParameterGroupFamily());
                System.out.println("The name of the database engine " +
 engineOb.engine());
                System.out.println("The version number of the database engine " +
 engineOb.engineVersion());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- For API details, see DescribeOrderableDBInstanceOptions in *Amazon SDK for Java 2.x API Reference*.

PowerShell

Tools for PowerShell V4

Example 1: This example lists the DB engine versions that support a specific DB instance class in an Amazon Web Services Region.

```
$params = @{
  Engine = 'aurora-postgresql'
  DBInstanceClass = 'db.r5.large'
  Region = 'us-east-1'
}
Get-RDSOrderableDBInstanceOption @params
```

Example 2: This example lists the DB instance classes that are supported for a specific DB engine version in an Amazon Web Services Region.

```
$params = @{
  Engine = 'aurora-postgresql'
  EngineVersion = '13.6'
```

```
  Region = 'us-east-1'
}
Get-RDSOrderableDBInstanceOption @params
```

- For API details, see DescribeOrderableDBInstanceOptions in *Amazon Tools for PowerShell Cmdlet Reference (V4)*.

Tools for PowerShell V5

Example 1: This example lists the DB engine versions that support a specific DB instance class in an Amazon Web Services Region.

```
$params = @{
  Engine = 'aurora-postgresql'
  DBInstanceClass = 'db.r5.large'
  Region = 'us-east-1'
}
Get-RDSOrderableDBInstanceOption @params
```

Example 2: This example lists the DB instance classes that are supported for a specific DB engine version in an Amazon Web Services Region.

```
$params = @{
  Engine = 'aurora-postgresql'
  EngineVersion = '13.6'
  Region = 'us-east-1'
}
Get-RDSOrderableDBInstanceOption @params
```

- For API details, see DescribeOrderableDBInstanceOptions in *Amazon Tools for PowerShell Cmdlet Reference (V5)*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def get_orderable_instances(self, db_engine, db_engine_version):
        """
        Gets DB instance options that can be used to create DB instances that are
        compatible with a set of specifications.

        :param db_engine: The database engine that must be supported by the DB
 instance.
        :param db_engine_version: The engine version that must be supported by
 the DB instance.
        :return: The list of DB instance options that can be used to create a
 compatible DB instance.
        """
        try:
            inst_opts = []
            paginator = self.rds_client.get_paginator(
                "describe_orderable_db_instance_options"
            )
            for page in paginator.paginate(
                Engine=db_engine, EngineVersion=db_engine_version
            ):
                inst_opts += page["OrderableDBInstanceOptions"]
        except ClientError as err:
            logger.error(
                "Couldn't get orderable DB instances. Here's why: %s: %s",
```

```
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return inst_opts
```

- For API details, see DescribeOrderableDBInstanceOptions in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   pub async fn get_instance_classes(&self) -> Result<Vec<String>,
ScenarioError> {
        let describe_orderable_db_instance_options_items = self
            .rds
            .describe_orderable_db_instance_options(
                DB_ENGINE,
                self.engine_version
                    .as_ref()
                    .expect("engine version for db instance options")
                    .as_str(),
            )
            .await;

        describe_orderable_db_instance_options_items
            .map(|options| {
                options
                    .iter()
                    .filter(|o| o.storage_type() == Some("aurora"))
```

```
                    .map(|o|
 o.db_instance_class().unwrap_or_default().to_string())
                    .collect::<Vec<String>>()
            })
            .map_err(|err| ScenarioError::new("Could not get available instance
 classes", &err))
    }

    pub async fn describe_orderable_db_instance_options(
        &self,
        engine: &str,
        engine_version: &str,
    ) -> Result<Vec<OrderableDbInstanceOption>,
 SdkError<DescribeOrderableDBInstanceOptionsError>>
    {
        self.inner
            .describe_orderable_db_instance_options()
            .engine(engine)
            .engine_version(engine_version)
            .into_paginator()
            .items()
            .send()
            .try_collect()
            .await
    }

#[tokio::test]
async fn test_scenario_get_instance_classes() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_create_db_cluster_parameter_group()
        .return_once(|_, _, _| {
            Ok(CreateDbClusterParameterGroupOutput::builder()

 .db_cluster_parameter_group(DbClusterParameterGroup::builder().build())
                .build())
        });

    mock_rds
        .expect_describe_orderable_db_instance_options()
        .with(eq("aurora-mysql"), eq("aurora-mysql8.0"))
        .return_once(|_, _| {
            Ok(vec![
```

```
                OrderableDbInstanceOption::builder()
                    .db_instance_class("t1")
                    .storage_type("aurora")
                    .build(),
                OrderableDbInstanceOption::builder()
                    .db_instance_class("t1")
                    .storage_type("aurora-iopt1")
                    .build(),
                OrderableDbInstanceOption::builder()
                    .db_instance_class("t2")
                    .storage_type("aurora")
                    .build(),
                OrderableDbInstanceOption::builder()
                    .db_instance_class("t3")
                    .storage_type("aurora")
                    .build(),
            ])
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario
        .set_engine("aurora-mysql", "aurora-mysql8.0")
        .await
        .expect("set engine");

    let instance_classes = scenario.get_instance_classes().await;

    assert_eq!(
        instance_classes,
        Ok(vec!["t1".into(), "t2".into(), "t3".into()])
    );
}

#[tokio::test]
async fn test_scenario_get_instance_classes_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_describe_orderable_db_instance_options()
        .with(eq("aurora-mysql"), eq("aurora-mysql8.0"))
        .return_once(|_, _| {
            Err(SdkError::service_error(

 DescribeOrderableDBInstanceOptionsError::unhandled(Box::new(Error::new(
```

```
                    ErrorKind::Other,
                    "describe_orderable_db_instance_options_error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
            ))
        });

    let mut scenario = AuroraScenario::new(mock_rds);
    scenario.engine_family = Some("aurora-mysql".into());
    scenario.engine_version = Some("aurora-mysql8.0".into());

    let instance_classes = scenario.get_instance_classes().await;

    assert_matches!(
        instance_classes,
        Err(ScenarioError {message, context: _}) if message == "Could not get
 available instance classes"
    );
}
```

- For API details, see DescribeOrderableDBInstanceOptions in *Amazon SDK for Rust API reference*.

SAP ABAP

SDK for SAP ABAP

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    " iv_engine        = 'mysql'
    " iv_engineversion = '8.0.35'
    TRY.
        oo_result = lo_rds->descrorderabledbinstoptions(
          iv_engine        = iv_engine
          iv_engineversion = iv_engineversion ).
```

```
        DATA(lv_option_count) = lines( oo_result-
>get_orderabledbinstoptions( ) ).
        MESSAGE |Retrieved { lv_option_count } orderable DB instance options.|
 TYPE 'I'.
    ENDTRY.
```

- For API details, see DescribeOrderableDBInstanceOptions in *Amazon SDK for SAP ABAP API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Use `ModifyDBClusterParameterGroup` with an Amazon SDK

The following code examples show how to use `ModifyDBClusterParameterGroup`.

Action examples are code excerpts from larger programs and must be run in context. You can see this action in context in the following code example:

- Learn the basics

.NET

Amazon SDK for .NET (v4)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    /// <summary>
    /// Modify the specified integer parameters with new values from user input.
    /// </summary>
    /// <param name="groupName">The group name for the parameters.</param>
    /// <param name="parameters">The list of integer parameters to modify.</
param>
```

```
    /// <param name="newValue">Optional int value to set for parameters.</param>
    /// <returns>The name of the group that was modified.</returns>
    public async Task<string> ModifyIntegerParametersInGroupAsync(string
groupName, List<Parameter> parameters, int newValue = 0)
    {
        foreach (var p in parameters)
        {
            if (p.IsModifiable.GetValueOrDefault() && p.DataType == "integer")
            {
                while (newValue == 0)
                {
                    Console.WriteLine(
                        $"Enter a new value for {p.ParameterName} from the
allowed values {p.AllowedValues} ");

                    var choice = Console.ReadLine();
                    int.TryParse(choice, out newValue);
                }

                p.ParameterValue = newValue.ToString();
            }
        }

        var request = new ModifyDBClusterParameterGroupRequest
        {
            Parameters = parameters,
            DBClusterParameterGroupName = groupName,
        };

        var result = await
_amazonRDS.ModifyDBClusterParameterGroupAsync(request);
        return result.DBClusterParameterGroupName;
    }
```

- For API details, see ModifyDBClusterParameterGroup in *Amazon SDK for .NET API Reference*.

C++

SDK for C++

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
        Aws::Client::ClientConfiguration clientConfig;
        // Optional: Set to the AWS Region (overrides config file).
        // clientConfig.region = "us-east-1";

    Aws::RDS::RDSClient client(clientConfig);

        Aws::RDS::Model::ModifyDBClusterParameterGroupRequest request;
        request.SetDBClusterParameterGroupName(CLUSTER_PARAMETER_GROUP_NAME);
        request.SetParameters(updateParameters);

        Aws::RDS::Model::ModifyDBClusterParameterGroupOutcome outcome =
                client.ModifyDBClusterParameterGroup(request);

        if (outcome.IsSuccess()) {
            std::cout << "The DB cluster parameter group was successfully
modified."
                      << std::endl;
        }
        else {
            std::cerr << "Error with Aurora::ModifyDBClusterParameterGroup. "
                      << outcome.GetError().GetMessage()
                      << std::endl;
        }
```

- For API details, see ModifyDBClusterParameterGroup in *Amazon SDK for C++ API Reference*.

Go

SDK for Go V2

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// UpdateParameters updates parameters in a named DB cluster parameter group.
func (clusters *DbClusters) UpdateParameters(ctx context.Context,
 parameterGroupName string, params []types.Parameter) error {
 _, err := clusters.AuroraClient.ModifyDBClusterParameterGroup(ctx,
  &rds.ModifyDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Parameters:                  params,
  })
 if err != nil {
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

- For API details, see ModifyDBClusterParameterGroup in *Amazon SDK for Go API Reference*.

Java

SDK for Java 2.x

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   public static void describeDbClusterParameterGroups(RdsClient rdsClient,
String dbClusterGroupName) {
       try {
           DescribeDbClusterParameterGroupsRequest groupsRequest =
DescribeDbClusterParameterGroupsRequest.builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .maxRecords(20)
                   .build();

           List<DBClusterParameterGroup> groups =
rdsClient.describeDBClusterParameterGroups(groupsRequest)
                   .dbClusterParameterGroups();
           for (DBClusterParameterGroup group : groups) {
               System.out.println("The group name is " +
group.dbClusterParameterGroupName());
               System.out.println("The group ARN is " +
group.dbClusterParameterGroupArn());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- For API details, see ModifyDBClusterParameterGroup in *Amazon SDK for Java 2.x API Reference*.

Kotlin

SDK for Kotlin

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
// Modify the auto_increment_offset parameter.
suspend fun modifyDBClusterParas(dClusterGroupName: String?) {
    val parameter1 =
        Parameter {
            parameterName = "auto_increment_offset"
            applyMethod = ApplyMethod.fromValue("immediate")
            parameterValue = "5"
        }

    val paraList = ArrayList<Parameter>()
    paraList.add(parameter1)
    val groupRequest =
        ModifyDbClusterParameterGroupRequest {
            dbClusterParameterGroupName = dClusterGroupName
            parameters = paraList
        }

    RdsClient.fromEnvironment { region = "us-west-2" }.use { rdsClient ->
        val response = rdsClient.modifyDbClusterParameterGroup(groupRequest)
        println("The parameter group ${response.dbClusterParameterGroupName} was
 successfully modified")
    }
}
```

- For API details, see ModifyDBClusterParameterGroup in *Amazon SDK for Kotlin API reference*.

Python

SDK for Python (Boto3)

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
class AuroraWrapper:
    """Encapsulates Aurora DB cluster actions."""

    def __init__(self, rds_client):
        """
        :param rds_client: A Boto3 Amazon Relational Database Service (Amazon
 RDS) client.
        """
        self.rds_client = rds_client

    @classmethod
    def from_client(cls):
        """
        Instantiates this class from a Boto3 client.
        """
        rds_client = boto3.client("rds")
        return cls(rds_client)


    def update_parameters(self, parameter_group_name, update_parameters):
        """
        Updates parameters in a custom DB cluster parameter group.

        :param parameter_group_name: The name of the parameter group to update.
        :param update_parameters: The parameters to update in the group.
        :return: Data about the modified parameter group.
        """
        try:
            response = self.rds_client.modify_db_cluster_parameter_group(
                DBClusterParameterGroupName=parameter_group_name,
                Parameters=update_parameters,
            )
```

```
        except ClientError as err:
            logger.error(
                "Couldn't update parameters in %s. Here's why: %s: %s",
                parameter_group_name,
                err.response["Error"]["Code"],
                err.response["Error"]["Message"],
            )
            raise
        else:
            return response
```

- For API details, see ModifyDBClusterParameterGroup in *Amazon SDK for Python (Boto3) API Reference*.

Rust

SDK for Rust

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
   // Modify both the auto_increment_offset and auto_increment_increment
parameters in one call in the custom parameter group. Set their ParameterValue
fields to a new allowable value. rds.ModifyDbClusterParameterGroup.
   pub async fn update_auto_increment(
       &self,
       offset: u8,
       increment: u8,
   ) -> Result<(), ScenarioError> {
       let modify_db_cluster_parameter_group = self
           .rds
           .modify_db_cluster_parameter_group(
               DB_CLUSTER_PARAMETER_GROUP_NAME,
               vec![
                   Parameter::builder()
                       .parameter_name("auto_increment_offset")
```

```
                        .parameter_value(format!("{offset}"))
                        .apply_method(aws_sdk_rds::types::ApplyMethod::Immediate)
                        .build(),
                    Parameter::builder()
                        .parameter_name("auto_increment_increment")
                        .parameter_value(format!("{increment}"))
                        .apply_method(aws_sdk_rds::types::ApplyMethod::Immediate)
                        .build(),
                ],
            )
            .await;

        if let Err(error) = modify_db_cluster_parameter_group {
            return Err(ScenarioError::new(
                "Failed to modify cluster parameter group",
                &error,
            ));
        }

        Ok(())
    }

    pub async fn modify_db_cluster_parameter_group(
        &self,
        name: &str,
        parameters: Vec<Parameter>,
    ) -> Result<ModifyDbClusterParameterGroupOutput,
 SdkError<ModifyDBClusterParameterGroupError>>
    {
        self.inner
            .modify_db_cluster_parameter_group()
            .db_cluster_parameter_group_name(name)
            .set_parameters(Some(parameters))
            .send()
            .await
    }

#[tokio::test]
async fn test_scenario_update_auto_increment() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_modify_db_cluster_parameter_group()
        .withf(|name, params| {
```

```
            assert_eq!(name, "RustSDKCodeExamplesDBParameterGroup");
            assert_eq!(
                params,
                &vec![
                    Parameter::builder()
                        .parameter_name("auto_increment_offset")
                        .parameter_value("10")
                        .apply_method(aws_sdk_rds::types::ApplyMethod::Immediate)
                        .build(),
                    Parameter::builder()
                        .parameter_name("auto_increment_increment")
                        .parameter_value("20")
                        .apply_method(aws_sdk_rds::types::ApplyMethod::Immediate)
                        .build(),
                ]
            );
            true
        })
        .return_once(|_, _|
 Ok(ModifyDbClusterParameterGroupOutput::builder().build()));

    let scenario = AuroraScenario::new(mock_rds);

    scenario
        .update_auto_increment(10, 20)
        .await
        .expect("update auto increment");
}

#[tokio::test]
async fn test_scenario_update_auto_increment_error() {
    let mut mock_rds = MockRdsImpl::default();

    mock_rds
        .expect_modify_db_cluster_parameter_group()
        .return_once(|_, _| {
            Err(SdkError::service_error(

 ModifyDBClusterParameterGroupError::unhandled(Box::new(Error::new(
                    ErrorKind::Other,
                    "modify_db_cluster_parameter_group_error",
                ))),
                Response::new(StatusCode::try_from(400).unwrap(),
 SdkBody::empty()),
```

```
            ))
        });

    let scenario = AuroraScenario::new(mock_rds);

    let update = scenario.update_auto_increment(10, 20).await;
    assert_matches!(update, Err(ScenarioError { message, context: _}) if message
 == "Failed to modify cluster parameter group");
}
```

- For API details, see ModifyDBClusterParameterGroup in *Amazon SDK for Rust API reference*.

SAP ABAP

SDK for SAP ABAP

> **Note**
>
> There's more on GitHub. Find the complete example and learn how to set up and run in the Amazon Code Examples Repository.

```
    TRY.
        oo_result = lo_rds->modifydbclusterparamgroup(
          iv_dbclusterparamgroupname = iv_param_group_name
          it_parameters = it_update_parameters
        ).
      CATCH /aws1/cx_rdsdbprmgrnotfndfault.
        " Re-raise exception - parameter group not found
        RAISE EXCEPTION TYPE /aws1/cx_rdsdbprmgrnotfndfault.
      CATCH /aws1/cx_rdsinvdbprmgrstatef00.
        " Re-raise exception - invalid state
        RAISE EXCEPTION TYPE /aws1/cx_rdsinvdbprmgrstatef00.
    ENDTRY.
```

- For API details, see ModifyDBClusterParameterGroup in *Amazon SDK for SAP ABAP API reference*.

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Scenarios for Aurora using Amazon SDKs

The following code examples show you how to implement common scenarios in Aurora with Amazon SDKs. These scenarios show you how to accomplish specific tasks by calling multiple functions within Aurora or combined with other Amazon Web Services services. Each scenario includes a link to the complete source code, where you can find instructions on how to set up and run the code.

Scenarios target an intermediate level of experience to help you understand service actions in context.

Examples

- Create a lending library REST API
- Create an Aurora Serverless work item tracker

Create a lending library REST API

The following code example shows how to create a lending library where patrons can borrow and return books by using a REST API backed by an Amazon Aurora database.

Python

SDK for Python (Boto3)

Shows how to use the Amazon SDK for Python (Boto3) with the Amazon Relational Database Service (Amazon RDS) API and Amazon Chalice to create a REST API backed by an Amazon Aurora database. The web service is fully serverless and represents a simple lending library where patrons can borrow and return books. Learn how to:

- Create and manage a serverless Aurora database cluster.
- Use Amazon Secrets Manager to manage database credentials.
- Implement a data storage layer that uses Amazon RDS to move data into and out of the database.

- Use Amazon Chalice to deploy a serverless REST API to Amazon API Gateway and Amazon Lambda.
- Use the Requests package to send requests to the web service.

For complete source code and instructions on how to set up and run, see the full example on GitHub.

Services used in this example

- API Gateway
- Aurora
- Lambda
- Secrets Manager

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Create an Aurora Serverless work item tracker

The following code examples show how to create a web application that tracks work items in an Amazon Aurora Serverless database and uses Amazon Simple Email Service (Amazon SES) to send reports.

.NET

Amazon SDK for .NET

Shows how to use the Amazon SDK for .NET to create a web application that tracks work items in an Amazon Aurora database and emails reports by using Amazon Simple Email Service (Amazon SES). This example uses a front end built with React.js to interact with a RESTful .NET backend.

- Integrate a React web application with Amazon services.
- List, add, update, and delete items in an Aurora table.
- Send an email report of filtered work items using Amazon SES.
- Deploy and manage example resources with the included Amazon CloudFormation script.

For complete source code and instructions on how to set up and run, see the full example on GitHub.

Services used in this example

- Aurora
- Amazon RDS
- Amazon RDS Data Service
- Amazon SES

C++

SDK for C++

Shows how to create a web application that tracks and reports on work items stored in an Amazon Aurora Serverless database.

For complete source code and instructions on how to set up a C++ REST API that queries Amazon Aurora Serverless data and for use by a React application, see the full example on GitHub.

Services used in this example

- Aurora
- Amazon RDS
- Amazon RDS Data Service
- Amazon SES

Java

SDK for Java 2.x

Shows how to create a web application that tracks and reports on work items stored in an Amazon RDS database.

For complete source code and instructions on how to set up a Spring REST API that queries Amazon Aurora Serverless data and for use by a React application, see the full example on GitHub.

For complete source code and instructions on how to set up and run an example that uses the JDBC API, see the full example on GitHub.

Services used in this example

- Aurora
- Amazon RDS
- Amazon RDS Data Service
- Amazon SES

JavaScript

SDK for JavaScript (v3)

Shows how to use the Amazon SDK for JavaScript (v3) to create a web application that tracks work items in an Amazon Aurora database and emails reports by using Amazon Simple Email Service (Amazon SES). This example uses a front end built with React.js to interact with an Express Node.js backend.

- Integrate a React.js web application with Amazon Web Services services.
- List, add, and update items in an Aurora table.
- Send an email report of filtered work items by using Amazon SES.
- Deploy and manage example resources with the included Amazon CloudFormation script.

For complete source code and instructions on how to set up and run, see the full example on GitHub.

Services used in this example

- Aurora
- Amazon RDS
- Amazon RDS Data Service
- Amazon SES

Kotlin

SDK for Kotlin

Shows how to create a web application that tracks and reports on work items stored in an Amazon RDS database.

For complete source code and instructions on how to set up a Spring REST API that queries Amazon Aurora Serverless data and for use by a React application, see the full example on GitHub.

Services used in this example

- Aurora
- Amazon RDS
- Amazon RDS Data Service
- Amazon SES

PHP

SDK for PHP

Shows how to use the Amazon SDK for PHP to create a web application that tracks work items in an Amazon RDS database and emails reports by using Amazon Simple Email Service (Amazon SES). This example uses a front end built with React.js to interact with a RESTful PHP backend.

- Integrate a React.js web application with Amazon services.
- List, add, update, and delete items in an Amazon RDS table.
- Send an email report of filtered work items using Amazon SES.
- Deploy and manage example resources with the included Amazon CloudFormation script.

For complete source code and instructions on how to set up and run, see the full example on GitHub.

Services used in this example

- Aurora
- Amazon RDS
- Amazon RDS Data Service

- Amazon SES

Python

SDK for Python (Boto3)

Shows how to use the Amazon SDK for Python (Boto3) to create a REST service that tracks work items in an Amazon Aurora Serverless database and emails reports by using Amazon Simple Email Service (Amazon SES). This example uses the Flask web framework to handle HTTP routing and integrates with a React webpage to present a fully functional web application.

- Build a Flask REST service that integrates with Amazon Web Services services.
- Read, write, and update work items that are stored in an Aurora Serverless database.
- Create an Amazon Secrets Manager secret that contains database credentials and use it to authenticate calls to the database.
- Use Amazon SES to send email reports of work items.

For complete source code and instructions on how to set up and run, see the full example on GitHub.

Services used in this example

- Aurora
- Amazon RDS
- Amazon RDS Data Service
- Amazon SES

For a complete list of Amazon SDK developer guides and code examples, see Using this service with an Amazon SDK. This topic also includes information about getting started and details about previous SDK versions.

Best practices with Amazon Aurora

Following, you can find information on general best practices and options for using or migrating data to an Amazon Aurora DB cluster.

Some of the best practices for Amazon Aurora are specific to a particular database engine. For more information about Aurora best practices specific to a database engine, see the following.

Database engine	Best practices
Amazon Aurora MySQL	See Best practices with Amazon Aurora MySQL
Amazon Aurora PostgreSQL	See Best practices with Amazon Aurora PostgreSQL

> **Note**
>
> For common recommendations for Aurora, see Recommendations from Amazon Aurora.

Topics

- Basic operational guidelines for Amazon Aurora
- DB instance RAM recommendations
- Amazon database drivers
- Monitoring Amazon Aurora
- Working with DB parameter groups and DB cluster parameter groups
- Amazon Aurora best practices video

Basic operational guidelines for Amazon Aurora

The following are basic operational guidelines that everyone should follow when working with Amazon Aurora. The Amazon RDS Service Level Agreement requires that you follow these guidelines:

- Monitor your memory, CPU, and storage usage. You can set up Amazon CloudWatch to notify you when usage patterns change or when you approach the capacity of your deployment. This way, you can maintain system performance and availability.
- If your client application is caching the Domain Name Service (DNS) data of your DB instances, set a time-to-live (TTL) value of less than 30 seconds. The underlying IP address of a DB instance can change after a failover. Thus, caching the DNS data for an extended time can lead to connection failures if your application tries to connect to an IP address that no longer is in service. Aurora DB clusters with multiple read replicas can experience connection failures also when connections use the reader endpoint and one of the read replica instances is in maintenance or is deleted.
- Test failover for your DB cluster to understand how long the process takes for your use case. Testing failover can help you ensure that the application that accesses your DB cluster can automatically connect to the new DB cluster after failover.

DB instance RAM recommendations

To optimize performance, allocate enough RAM so that your working set resides almost completely in memory. To determine whether your working set is almost all in memory, examine the following metrics in Amazon CloudWatch:

- `VolumeReadIOPS` – This metric measures the average number of read I/O operations from a cluster volume, reported at 5-minute intervals. The value of `VolumeReadIOPS` should be small and stable. In some cases, you might find your read I/O is spiking or is higher than usual. If so, investigate the DB instances in your DB cluster to see which DB instances are causing the increased I/O.

  > **Tip**
  >
  > If your Aurora MySQL cluster uses parallel query, you might see an increase in `VolumeReadIOPS` values. Parallel queries don't use the buffer pool. Thus, although the queries are fast, this optimized processing can result in an increase in read operations and associated charges.

- `BufferCacheHitRatio` – This metric measures the percentage of requests that are served by the buffer cache of a DB instance in your DB cluster. This metric gives you an insight into the amount of data that is being served from memory.

A high hit ratio indicates that your DB instance has enough memory available. A low hit ratio indicates that your queries on this DB instance are frequently going to disk. Investigate your workload to see which queries are causing this behavior.

If, after investigating your workload, you find that you need more memory, consider scaling up the DB instance class to a class with more RAM. After doing so, you can investigate the metrics discussed preceding and continue to scale up as necessary. If your Aurora cluster is larger than 40 TB, don't use db.t2, db.t3, or db.t4g instance classes.

For more information, see Amazon CloudWatch metrics for Amazon Aurora.

Amazon database drivers

We recommend the Amazon suite of drivers for application connectivity. The drivers have been designed to provide support for faster switchover and failover times, and authentication with Amazon Secrets Manager, Amazon Identity and Access Management (IAM), and Federated Identity. The Amazon drivers rely on monitoring DB cluster status and being aware of the cluster topology to determine the new writer. This approach reduces switchover and failover times to single-digit seconds, compared to tens of seconds for open-source drivers.

As new service features are introduced, the goal of the Amazon suite of drivers is to have built-in support for these service features.

For more information, see Connecting to Aurora DB clusters with the Amazon drivers.

Monitoring Amazon Aurora

Amazon Aurora provides various metrics and insights that you can monitor to determine the health and performance of your Aurora DB cluster. You can use various tools, such as the Amazon Web Services Management Console, Amazon CLI, and CloudWatch API, to view Aurora metrics. You can view the combined Performance Insights and CloudWatch metrics in the Performance Insights dashboard and monitor your DB instance. To use this monitoring view, Performance Insights must be turned on for your DB instance. For information about this monitoring view, see Database Insights.

You can create a performance analysis report for a specific time period and view the insights identified and the recommendations to resolve the issues. For more information, see Database Insights.

Working with DB parameter groups and DB cluster parameter groups

We recommend that you try out DB parameter group and DB cluster parameter group changes on a test DB cluster before applying parameter group changes to your production DB cluster. Improperly setting DB engine parameters can have unintended adverse effects, including degraded performance and system instability.

Always use caution when modifying DB engine parameters, and back up your DB cluster before modifying a DB parameter group. For information about backing up your DB cluster, see Backing up and restoring an Amazon Aurora DB cluster.

Amazon Aurora best practices video

The Amazon Online Tech Talks channel on YouTube includes a video presentation on best practices for creating and configuring an Amazon Aurora DB cluster to be more secure and highly available. See Amazon Aurora best practices for high availability.

Performing a proof of concept with Amazon Aurora

Following, you can find an explanation of how to set up and run a proof of concept for Aurora. A *proof of concept* is an investigation that you do to see if Aurora is a good fit with your application. The proof of concept can help you understand Aurora features in the context of your own database applications and how Aurora compares with your current database environment. It can also show what level of effort you need to move data, port SQL code, tune performance, and adapt your current management procedures.

In this topic, you can find an overview and a step-by-step outline of the high-level procedures and decisions involved in running a proof of concept, listed following. For detailed instructions, you can follow links to the full documentation for specific subjects.

Overview of an Aurora proof of concept

When you conduct a proof of concept for Amazon Aurora, you learn what it takes to port your existing data and SQL applications to Aurora. You exercise the important aspects of Aurora at scale, using a volume of data and activity that's representative of your production environment. The objective is to feel confident that the strengths of Aurora match up well with the challenges that cause you to outgrow your previous database infrastructure. At the end of a proof of concept, you have a solid plan to do larger-scale performance benchmarking and application testing. At this point, you understand the biggest work items on your way to a production deployment.

The following advice about best practices can help you avoid common mistakes that cause problems during benchmarking. However, this topic doesn't cover the step-by-step process of performing benchmarks and doing performance tuning. Those procedures vary depending on your workload and the Aurora features that you use. For detailed information, consult performance-related documentation such as Managing performance and scaling for Aurora DB clusters, Amazon Aurora MySQL performance enhancements, Performance and scaling for Amazon Aurora PostgreSQL, and Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora.

The information in this topic applies mainly to applications where your organization writes the code and designs the schema and that support the MySQL and PostgreSQL open-source database engines. If you're testing a commercial application or code generated by an application framework, you might not have the flexibility to apply all of the guidelines. In such cases, check with your

Amazon representative to see if there are Aurora best practices or case studies for your type of application.

1. Identify your objectives

When you evaluate Aurora as part of a proof of concept, you choose what measurements to make and how to evaluate the success of the exercise.

You must ensure that all of the functionality of your application is compatible with Aurora. Because Aurora major versions are wire-compatible with corresponding major versions of MySQL and PostgreSQL, most applications developed for those engines are also compatible with Aurora. However, you must still validate compatibility on a per-application basis.

For example, some of the configuration choices that you make when you set up an Aurora cluster influence whether you can or should use particular database features. You might start with the most general-purpose kind of Aurora cluster, known as *provisioned*. You might then decide if a specialized configuration such as serverless or parallel query offers benefits for your workload.

Use the following questions to help identify and quantify your objectives:

- Does Aurora support all functional use cases of your workload?
- What dataset size or load level do you want? Can you scale to that level?
- What are your specific query throughput or latency requirements? Can you reach them?
- What is the minimum acceptable amount of planned or unplanned downtime for your workload? Can you achieve it?
- What are the necessary metrics for operational efficiency? Can you accurately monitor them?
- Does Aurora support your specific business goals, such as cost reduction, increase in deployment, or provisioning speed? Do you have a way to quantify these goals?
- Can you meet all security and compliance requirements for your workload?

Take some time to build knowledge about Aurora database engines and platform capabilities, and review the service documentation. Take note of all the features that can help you achieve your desired outcomes. One of these might be workload consolidation, described in the Amazon Database Blog post How to plan and optimize Amazon Aurora with MySQL compatibility for consolidated workloads. Another might be demand-based scaling, described in Amazon Aurora Auto Scaling with Aurora Replicas in the *Amazon Aurora User Guide.* Others might be performance gains or simplified database operations.

2. Understand your workload characteristics

Evaluate Aurora in the context of your intended use case. Aurora is a good choice for online transaction processing (OLTP) workloads. You can also run reports on the cluster that holds the real-time OLTP data without provisioning a separate data warehouse cluster. You can recognize if your use case falls into these categories by checking for the following characteristics:

- High concurrency, with dozens, hundreds, or thousands of simultaneous clients.
- Large volume of low-latency queries (milliseconds to seconds).
- Short, real-time transactions.
- Highly selective query patterns, with index-based lookups.
- For HTAP, analytical queries that can take advantage of Aurora parallel query.

One of the key factors affecting your database choices is the velocity of the data. *High velocity* involves data being inserted and updated very frequently. Such a system might have thousands of connections and hundreds of thousands of simultaneous queries reading from and writing to a database. Queries in high-velocity systems usually affect a relatively small number of rows, and typically access multiple columns in the same row.

Aurora is designed to handle high-velocity data. Depending on the workload, an Aurora cluster with a single r4.16xlarge DB instance can process more than 600,000 `SELECT` statements per second. Again depending on workload, such a cluster can process 200,000 `INSERT`, `UPDATE`, and `DELETE` statements per second. Aurora is a row store database and is ideally suited for high-volume, high-throughput, and highly parallelized OLTP workloads.

Aurora can also run reporting queries on the same cluster that handles the OLTP workload. Aurora supports up to 15 replicas, each of which is on average within 10–20 milliseconds of the primary instance. Analysts can query OLTP data in real time without copying the data to a separate data warehouse cluster. With Aurora clusters using the parallel query feature, you can offload much of the processing, filtering, and aggregation work to the massively distributed Aurora storage subsystem.

Use this planning phase to familiarize yourself with the capabilities of Aurora, other Amazon services, the Amazon Web Services Management Console, and the Amazon CLI. Also, check how these work with the other tooling that you plan to use in the proof of concept.

3. Practice with the Amazon Web Services Management Console or Amazon CLI

As a next step, practice with the Amazon Web Services Management Console or the Amazon CLI, to become familiar with these tools and with Aurora.

Practice with the Amazon Web Services Management Console

The following initial activities with Aurora database clusters are mainly so you can familiarize yourself with the Amazon Web Services Management Console environment and practice setting up and modifying Aurora clusters. If you use the MySQL-compatible and PostgreSQL-compatible database engines with Amazon RDS, you can build on that knowledge when you use Aurora.

By taking advantage of the Aurora shared storage model and features such as replication and snapshots, you can treat entire database clusters as another kind of object that you freely manipulate. You can set up, tear down, and change the capacity of Aurora clusters frequently during the proof of concept. You aren't locked into early choices about capacity, database settings, and physical data layout.

To get started, set up an empty Aurora cluster. Choose the **provisioned** capacity type and **regional** location for your initial experiments.

Connect to that cluster using a client program such as a SQL command-line application. Initially, you connect using the cluster endpoint. You connect to that endpoint to perform any write operations, such as data definition language (DDL) statements and extract, transform, load (ETL) processes. Later in the proof of concept, you connect query-intensive sessions using the reader endpoint, which distributes the query workload among multiple DB instances in the cluster.

Scale the cluster out by adding more Aurora Replicas. For those procedures, see Replication with Amazon Aurora. Scale the DB instances up or down by changing the Amazon instance class. Understand how Aurora simplifies these kinds of operations, so that if your initial estimates for system capacity are inaccurate, you can adjust later without starting over.

Create a snapshot and restore it to a different cluster.

Examine cluster metrics to see activity over time, and how the metrics apply to the DB instances in the cluster.

It's useful to become familiar with how to do these things through the Amazon Web Services Management Console in the beginning. After you understand what you can do with Aurora, you

can progress to automating those operations using the Amazon CLI. In the following sections, you can find more details about the procedures and best practices for these activities during the proof-of-concept period.

Practice with the Amazon CLI

We recommend automating deployment and management procedures, even in a proof-of-concept setting. To do so, become familiar with the Amazon CLI if you're not already. If you use the MySQL-compatible and PostgreSQL-compatible database engines with Amazon RDS, you can build on that knowledge when you use Aurora.

Aurora typically involves groups of DB instances arranged in clusters. Thus, many operations involve determining which DB instances are associated with a cluster and then performing administrative operations in a loop for all the instances.

For example, you might automate steps such as creating Aurora clusters, then scaling them up with larger instance classes or scaling them out with additional DB instances. Doing so helps you to repeat any stages in your proof of concept and explore what-if scenarios with different kinds or configurations of Aurora clusters.

Learn the capabilities and limitations of infrastructure deployment tools such as Amazon CloudFormation. You might find activities that you do in a proof-of-concept context aren't suitable for production use. For example, the Amazon CloudFormation behavior for modification is to create a new instance and delete the current one, including its data. For more details on this behavior, see Update behaviors of stack resources in the *Amazon CloudFormation User Guide.*

4. Create your Aurora cluster

With Aurora, you can explore what-if scenarios by adding DB instances to the cluster and scaling up the DB instances to more powerful instance classes. You can also create clusters with different configuration settings to run the same workload side by side. With Aurora, you have a lot of flexibility to set up, tear down, and reconfigure DB clusters. Given this, it's helpful to practice these techniques in the early stages of the proof-of-concept process. For the general procedures to create Aurora clusters, see Creating an Amazon Aurora DB cluster.

Where practical, start with a cluster using the following settings. Skip this step only if you have certain specific use cases in mind. For example, you might skip this step if your use case requires a specialized kind of Aurora cluster. Or you might skip it if you need a particular combination of database engine and version.

- Turn off **Easy create**. For the proof of concept, we recommend that you be aware of all the settings you choose so that you can create identical or slightly different clusters later.
- Use a recent DB engine version. These combinations of database engine and version have wide compatibility with other Aurora features and substantial customer usage for production applications.
  - Aurora MySQL version 3.x (MySQL 8.0 compatibility)
  - Aurora PostgreSQL version 15.x or 16.x
- Choose the **Dev/Test** template. This choice isn't significant for your proof-of-concept activities.
- For **DB instance class**, choose **Memory optimized classes** and one of the **xlarge** instance classes. You can adjust the instance class up or down later.
- Under **Multi-AZ Deployment**, choose **Create an Aurora Replica or Reader node in a different AZ**. Many of the most useful aspects of Aurora involve clusters of multiple DB instances. It makes sense to always start with at least two DB instances in any new cluster. Using a different Availability Zone for the second DB instance helps to test different high availability scenarios.
- When you pick names for the DB instances, use a generic naming convention. Don't refer to any cluster DB instance as the "writer," because different DB instances assume those roles as needed. We recommend using something like `clustername-az-serialnumber`, for example `myprodappdb-a-01`. These pieces uniquely identify the DB instance and its placement.
- Set the backup retention high for the Aurora cluster. With a long retention period, you can do point-in-time recovery (PITR) for a period up to 35 days. You can reset your database to a known state after running tests involving DDL and data manipulation language (DML) statements. You can also recover if you delete or change data by mistake.
- Turn on additional recovery, logging, and monitoring features at cluster creation. Turn on all the choices that are available under **Backtrack**, **Performance Insights**, **Monitoring**, and **Log exports**. With these features enabled, you can test the suitability of features such as backtracking, Enhanced Monitoring, or Performance Insights for your workload. You can also easily investigate performance and perform troubleshooting during the proof of concept.

5. Set up your schema

On the Aurora cluster, set up databases, tables, indexes, foreign keys, and other schema objects for your application. If you're moving from another MySQL-compatible or PostgreSQL-compatible database system, expect this stage to be simple and straightforward. You use the same SQL syntax and command line or other client applications that you're familiar with for your database engine.

To issue SQL statements on your cluster, find its cluster endpoint and supply that value as the connection parameter to your client application. You can find the cluster endpoint on the **Connectivity** tab of the detail page of your cluster. The cluster endpoint is the one labeled **Writer**. The other endpoint, labeled **Reader**, represents a read-only connection that you can supply to end users who run reports or other read-only queries. For help with any issues around connecting to your cluster, see Connecting to an Amazon Aurora DB cluster.

If you're porting your schema and data from a different database system, expect to make some schema changes at this point. These schema changes are to match the SQL syntax and capabilities available in Aurora. You might leave out certain columns, constraints, triggers, or other schema objects at this point. Doing so can be useful particularly if these objects require rework for Aurora compatibility and aren't significant for your objectives with the proof of concept.

If you're migrating from a database system with a different underlying engine than Aurora's, consider using the Amazon Schema Conversion Tool (Amazon SCT) to simplify the process. For details, see the Amazon Schema Conversion Tool User Guide. For general details about migration and porting activities, see the Migrating Your Databases to Amazon Aurora Amazon whitepaper.

During this stage, you can evaluate whether there are inefficiencies in your schema setup, for example in your indexing strategy or other table structures such as partitioned tables. Such inefficiencies can be amplified when you deploy your application on a cluster with multiple DB instances and a heavy workload. Consider whether you can fine-tune such performance aspects now, or during later activities such as a full benchmark test.

6. Import your data

During the proof of concept, you bring across the data, or a representative sample, from your former database system. If practical, set up at least some data in each of your tables. Doing so helps to test compatibility of all data types and schema features. After you have exercised the basic Aurora features, scale up the amount of data. By the time you finish the proof of concept, you should test your ETL tools, queries, and overall workload with a dataset that's big enough to draw accurate conclusions.

You can use several techniques to import either physical or logical backup data to Aurora. For details, see Migrating data to an Amazon Aurora MySQL DB cluster or Migrating data to Amazon Aurora with PostgreSQL compatibility depending on the database engine you're using in the proof of concept.

Experiment with the ETL tools and technologies that you're considering. See which one best meets your needs. Consider both throughput and flexibility. For example, some ETL tools perform a one-time transfer, and others involve ongoing replication from the old system to Aurora.

If you're migrating from a MySQL-compatible system to Aurora MySQL, you can use the native data transfer tools. The same applies if you're migrating from a PostgreSQL-compatible system to Aurora PostgreSQL. If you're migrating from a database system that uses a different underlying engine than Aurora does, you can experiment with the Amazon Database Migration Service (Amazon DMS). For details about Amazon DMS, see the Amazon Database Migration Service User Guide.

For details about migration and porting activities, see the Amazon whitepaper Aurora migration handbook.

7. Port your SQL code

Trying out SQL and associated applications requires different levels of effort depending on different cases. In particular, the level of effort depends on whether you move from a MySQL-compatible or PostgreSQL-compatible system or another kind.

- If you're moving from RDS for MySQL or RDS for PostgreSQL, the SQL changes are small enough that you can try the original SQL code with Aurora and manually incorporate needed changes.
- Similarly, if you move from an on-premises database compatible with MySQL or PostgreSQL, you can try the original SQL code and manually incorporate changes.
- If you're coming from a different commercial database, the required SQL changes are more extensive. In this case, consider using the Amazon SCT.

During this stage, you can evaluate whether there are inefficiencies in your schema setup, for example in your indexing strategy or other table structures such as partitioned tables. Consider whether you can fine-tune such performance aspects now, or during later activities such as a full benchmark test.

You can verify the database connection logic in your application. To take advantage of Aurora distributed processing, you might need to use separate connections for read and write operations, and use relatively short sessions for query operations. For information about connections, see 9. Connect to Aurora.

Consider if you had to make compromises and tradeoffs to work around issues in your production database. Build time into the proof-of-concept schedule to make improvements to your schema design and queries. To judge if you can achieve easy wins in performance, operating cost, and scalability, try the original and modified applications side by side on different Aurora clusters.

For details about migration and porting activities, see the Amazon whitepaper Aurora migration handbook.

8. Specify configuration settings

You can also review your database configuration parameters as part of the Aurora proof-of-concept exercise. You might already have MySQL or PostgreSQL configuration settings tuned for performance and scalability in your current environment. The Aurora storage subsystem is adapted and tuned for a distributed cloud-based environment with a high-speed storage subsystem. As a result, many former database engine settings don't apply. We recommend conducting your initial experiments with the default Aurora configuration settings. Reapply settings from your current environment only if you encounter performance and scalability bottlenecks. If you're interested, you can look more deeply into this subject in Introducing the Aurora storage engine on the Amazon Database Blog.

Aurora makes it easy to reuse the optimal configuration settings for a particular application or use case. Instead of editing a separate configuration file for each DB instance, you manage sets of parameters that you assign to entire clusters or specific DB instances. For example, the time zone setting applies to all DB instances in the cluster, and you can adjust the page cache size setting for each DB instance.

You start with one of the default parameter sets, and apply changes to only the parameters that you need to fine-tune. For details about working with parameter groups, see Amazon Aurora DB cluster and DB instance parameters. For the configuration settings that are or aren't applicable to Aurora clusters, see Aurora MySQL configuration parameters or Amazon Aurora PostgreSQL parameters depending on your database engine.

9. Connect to Aurora

As you find when doing your initial schema and data setup and running sample queries, you can connect to different endpoints in an Aurora cluster. The endpoint to use depends on whether the operation is a read such as `SELECT` statement, or a write such as a `CREATE` or `INSERT` statement.

As you increase the workload on an Aurora cluster and experiment with Aurora features, it's important for your application to assign each operation to the appropriate endpoint.

By using the cluster endpoint for write operations, you always connect to a DB instance in the cluster that has read/write capability. By default, only one DB instance in an Aurora cluster has read/write capability. This DB instance is called the *primary instance*. If the original primary instance becomes unavailable, Aurora activates a failover mechanism and a different DB instance takes over as the primary.

Similarly, by directing SELECT statements to the reader endpoint, you spread the work of processing queries among the DB instances in the cluster. The reader endpoint uses DNS resolution to route each new connection to one of the available Aurora Replicas, rather than distributing connections in a strict round-robin order. Doing most of the query work on the read-only DB Aurora Replicas reduces the load on the primary instance, freeing it to handle DDL and DML statements.

Using these endpoints reduces the dependency on hard-coded hostnames, and helps your application to recover more quickly from DB instance failures.

> **Note**
>
> Aurora also has custom endpoints that you create. Those endpoints usually aren't needed during a proof of concept.

The Aurora Replicas are subject to a replica lag, even though that lag is usually 10 to 20 milliseconds. You can monitor the replication lag and decide whether it is within the range of your data consistency requirements. In some cases, your read queries might require strong read consistency (read-after-write consistency). In these cases, you can continue using the cluster endpoint for them and not the reader endpoint.

To take full advantage of Aurora capabilities for distributed parallel execution, you might need to change the connection logic. Your objective is to avoid sending all read requests to the primary instance. The read-only Aurora Replicas are standing by, with all the same data, ready to handle SELECT statements. Code your application logic to use the appropriate endpoint for each kind of operation. Follow these general guidelines:

- Avoid using a single hard-coded connection string for all database sessions.

- If practical, enclose write operations such as DDL and DML statements in functions in your client application code. That way, you can make different kinds of operations use specific connections.
- Make separate functions for query operations. Aurora assigns each new connection to the reader endpoint to a different Aurora Replica to balance the load for read-intensive applications.
- For operations involving sets of queries, close and reopen the connection to the reader endpoint when each set of related queries is finished. Use connection pooling if that feature is available in your software stack. Directing queries to different connections helps Aurora to distribute the read workload among the DB instances in the cluster.

For general information about connection management and endpoints for Aurora, see Connecting to an Amazon Aurora DB cluster. For a deep dive on this subject, see Aurora MySQL database administrator's handbook – Connection management.

10. Run your workload

After the schema, data, and configuration settings are in place, you can begin exercising the cluster by running your workload. Use a workload in the proof of concept that mirrors the main aspects of your production workload. We recommend always making decisions about performance using real-world tests and workloads rather than synthetic benchmarks such as sysbench or TPC-C. Wherever practical, gather measurements based on your own schema, query patterns, and usage volume.

As much as practical, replicate the actual conditions under which the application will run. For example, you typically run your application code on Amazon EC2 instances in the same Amazon Region and the same virtual private cloud (VPC) as the Aurora cluster. If your production application runs on multiple EC2 instances spanning multiple Availability Zones, set up your proof-of-concept environment in the same way. For more information on Amazon Regions, see Regions and Availability Zones in the *Amazon RDS User Guide.* To learn more about the Amazon VPC service, see What is Amazon VPC? in the *Amazon VPC User Guide.*

After you've verified that the basic features of your application work and you can access the data through Aurora, you can exercise aspects of the Aurora cluster. Some features you might want to try are concurrent connections with load balancing, concurrent transactions, and automatic replication.

By this point, the data transfer mechanisms should be familiar, and so you can run tests with a larger proportion of sample data.

This stage is when you can see the effects of changing configuration settings such as memory limits and connection limits. Revisit the procedures that you explored in 8. Specify configuration settings.

You can also experiment with mechanisms such as creating and restoring snapshots. For example, you can create clusters with different Amazon instance classes, numbers of Amazon Replicas, and so on. Then on each cluster, you can restore the same snapshot containing your schema and all your data. For the details of that cycle, see Creating a DB cluster snapshot and Restoring from a DB cluster snapshot.

11. Measure performance

Best practices in this area are designed to ensure that all the right tools and processes are set up to quickly isolate abnormal behaviors during workload operations. They're also set up to see that you can reliably identify any applicable causes.

You can always see the current state of your cluster, or examine trends over time, by examining the **Monitoring** tab. This tab is available from the console detail page for each Aurora cluster or DB instance. It displays metrics from the Amazon CloudWatch monitoring service in the form of charts. You can filter the metrics by name, by DB instance, and by time period.


To have more choices on the **Monitoring** tab, enable Enhanced Monitoring and Performance Insights in the cluster settings. You can also enable those choices later if you didn't choose them when setting up the cluster.

To measure performance, you rely mostly on the charts showing activity for the whole Aurora cluster. You can verify whether the Aurora Replicas have similar load and response times. You can also see how the work is split up between the read/write primary instance and the read-only Aurora Replicas. If there is some imbalance between the DB instances or an issue affecting only one DB instance, you can examine the **Monitoring** tab for that specific instance.

After the environment and the actual workload are set up to emulate your production application, you can measure how well Aurora performs. The most important questions to answer are as follows:

- How many queries per second is Aurora processing? You can examine the **Throughput** metrics to see the figures for various kinds of operations.
- How long does it take, on average for Aurora to process a given query? You can examine the **Latency** metrics to see the figures for various kinds of operations.

To view the throughput and latency metrics, check the **Monitoring** tab for a given Aurora cluster in the Amazon RDS console. The following screenshot shows an example of the **Select Latency**, **DML Latency**, **Select Throughput**, and **DML Throughput** metrics on the **Monitoring** tab.

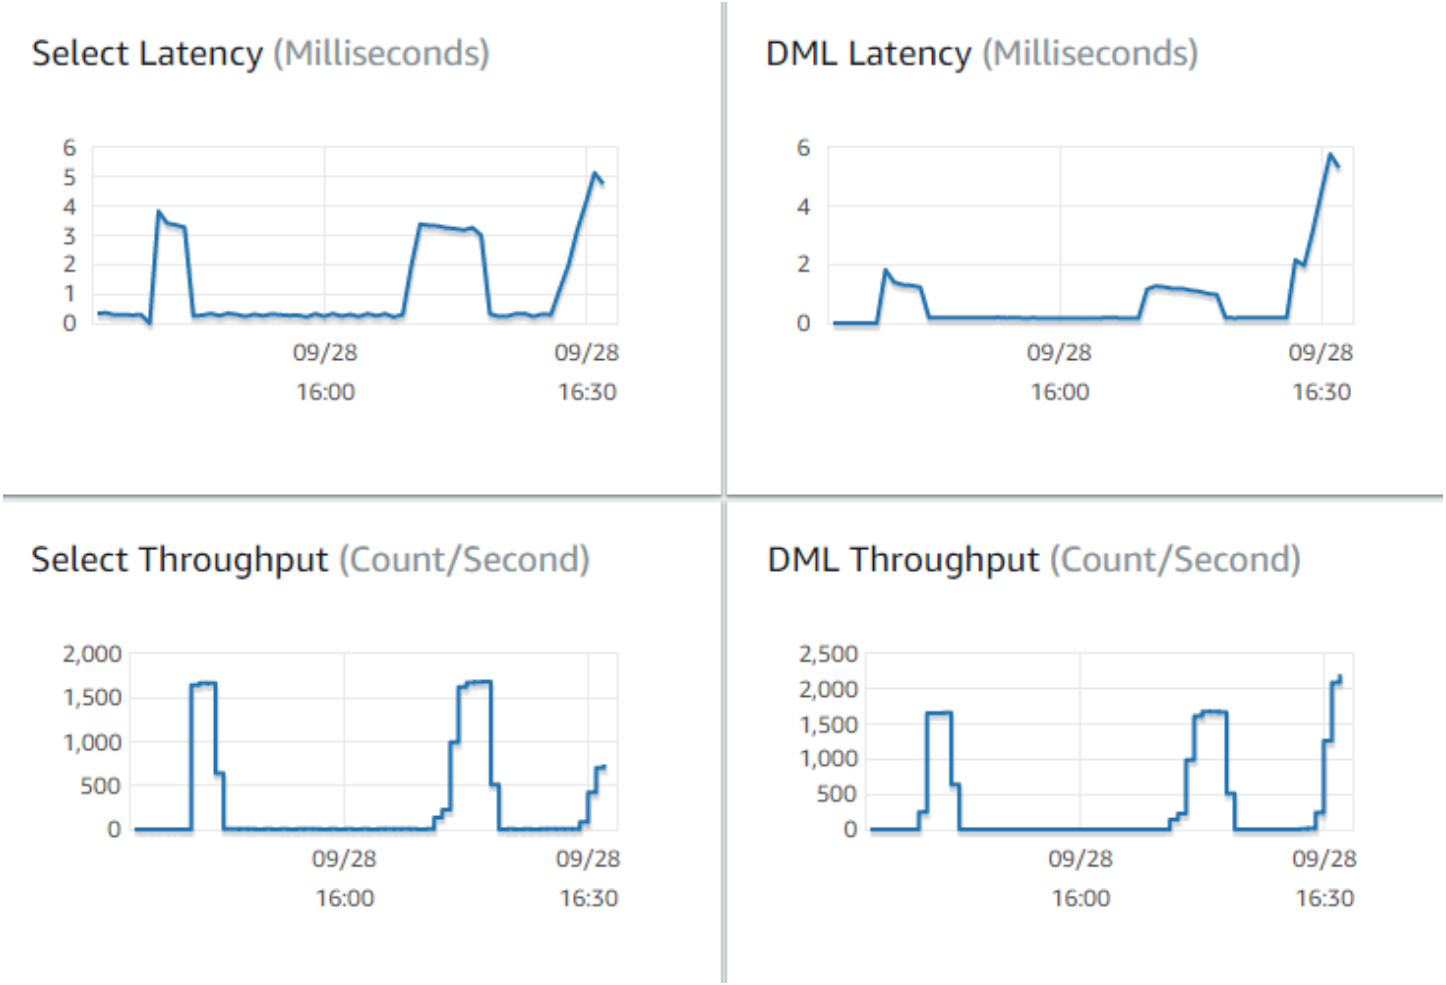

If you can, establish baseline values for these metrics in your current environment. If that's not practical, construct a baseline on the Aurora cluster by executing a workload equivalent to your production application. For example, run your Aurora workload with a similar number of simultaneous users and queries. Then observe how the values change as you experiment with different instance classes, cluster size, configuration settings, and so on.

If the throughput numbers are lower than you expect, investigate further the factors affecting database performance for your workload. Similarly, if the latency numbers are higher than you expect, further investigate. To do so, monitor the secondary metrics for the DB server (CPU, memory, and so on). You can see whether the DB instances are close to their limits. You can also see how much extra capacity your DB instances have to handle more concurrent queries, queries against larger tables, and so on.

> **Tip**
>
> To detect metric values that fall outside the expected ranges, set up CloudWatch alarms.

When evaluating the ideal Aurora cluster size and capacity, you can find the configuration that achieves peak application performance without over-provisioning resources. One important factor is finding the appropriate size for the DB instances in the Aurora cluster. Start by selecting an instance size that has similar CPU and memory capacity to your current production environment. Collect throughput and latency numbers for the workload at that instance size. Then, scale the instance up to the next larger size. See if the throughput and latency numbers improve. Also scale the instance size down, and see if the latency and throughput numbers remain the same. Your goal is to get the highest throughput, with the lowest latency, on the smallest instance possible.

> **Tip**
>
> Size your Aurora clusters and associated DB instances with enough existing capacity to handle sudden, unpredictable traffic spikes. For mission-critical databases, leave at least 20 percent spare CPU and memory capacity.

Run performance tests long enough to measure database performance in a warm, steady state. You might need to run the workload for many minutes or even a few hours before reaching this steady state. It's normal at the beginning of a run to have some variance. This variance happens because each Aurora Replica warms up its caches based on the SELECT queries that it handles.

Aurora performs best with transactional workloads involving multiple concurrent users and queries. To ensure that you're driving enough load for optimal performance, run benchmarks that use multithreading, or run multiple instances of the performance tests concurrently. Measure performance with hundreds or even thousands of concurrent client threads. Simulate the number of concurrent threads that you expect in your production environment. You might also perform additional stress tests with more threads to measure Aurora scalability.

12. Exercise Aurora high availability

Many of the main Aurora features involve high availability. These features include automatic replication, automatic failover, automatic backups with point-in-time restore, and ability to add

DB instances to the cluster. The safety and reliability from features like these are important for mission-critical applications.

To evaluate these features requires a certain mindset. In earlier activities, such as performance measurement, you observe how the system performs when everything works correctly. Testing high availability requires you to think through worst-case behavior. You must consider various kinds of failures, even if such conditions are rare. You might intentionally introduce problems to make sure that the system recovers correctly and quickly.

> **Tip**
>
> For a proof of concept, set up all the DB instances in an Aurora cluster with the same Amazon instance class. Doing so makes it possible to try out Aurora availability features without major changes to performance and scalability as you take DB instances offline to simulate failures.

We recommend using at least two instances in each Aurora cluster. The DB instances in an Aurora cluster can span up to three Availability Zones (AZs). Locate each of the first two or three DB instances in a different AZ. When you begin using larger clusters, spread your DB instances across all of the AZs in your Amazon Region. Doing so increases fault tolerance capability. Even if a problem affects an entire AZ, Aurora can fail over to a DB instance in a different AZ. If you run a cluster with more than three instances, distribute the DB instances as evenly as you can over all three AZs.

> **Tip**
>
> The storage for an Aurora cluster is independent from the DB instances. The storage for each Aurora cluster always spans three AZs.
> When you test high availability features, always use DB instances with identical capacity in your test cluster. Doing so avoids unpredictable changes in performance, latency, and so on whenever one DB instance takes over for another.

To learn how to simulate failure conditions to test high availability features, see Testing Amazon Aurora MySQL using fault injection queries.

As part of your proof-of-concept exercise, one objective is to find the ideal number of DB instances and the optimal instance class for those DB instances. Doing so requires balancing the requirements of high availability and performance.

For Aurora, the more DB instances that you have in a cluster, the greater the benefits for high availability. Having more DB instances also improves scalability of read-intensive applications. Aurora can distribute multiple connections for SELECT queries among the read-only Aurora Replicas.

On the other hand, limiting the number of DB instances reduces the replication traffic from the primary node. The replication traffic consumes network bandwidth, which is another aspect of overall performance and scalability. Thus, for write-intensive OLTP applications, prefer to have a smaller number of large DB instances rather than many small DB instances.

In a typical Aurora cluster, one DB instance (the primary instance) handles all the DDL and DML statements. The other DB instances (the Aurora Replicas) handle only SELECT statements. Although the DB instances don't do exactly the same amount of work, we recommend using the same instance class for all the DB instances in the cluster. That way, if a failure happens and Aurora promotes one of the read-only DB instances to be the new primary instance, the primary instance has the same capacity as before.

If you need to use DB instances of different capacities in the same cluster, set up failover tiers for the DB instances. These tiers determine the order in which Aurora Replicas are promoted by the failover mechanism. Put DB instances that are a lot larger or smaller than the others into a lower failover tier. Doing so ensures that they are chosen last for promotion.

Exercise the data recovery features of Aurora, such as automatic point-in-time restore, manual snapshots and restore, and cluster backtracking. If appropriate, copy snapshots to other Amazon Regions and restore into other Amazon Regions to mimic DR scenarios.

Investigate your organization's requirements for restore time objective (RTO), restore point objective (RPO), and geographic redundancy. Most organizations group these items under the broad category of disaster recovery. Evaluate the Aurora high availability features described in this section in the context of your disaster recovery process to ensure that your RTO and RPO requirements are met.

13. What to do next

At the end of a successful proof-of-concept process, you confirm that Aurora is a suitable solution for you based on the anticipated workload. Throughout the preceding process, you've checked how Aurora works in a realistic operational environment and measured it against your success criteria.

After you get your database environment up and running with Aurora, you can move on to more detailed evaluation steps, leading to your final migration and production deployment. Depending on your situation, these other steps might or might not be included in the proof-of-concept process. For details about migration and porting activities, see the Amazon whitepaper Aurora migration handbook.

In another next step, consider the security configurations relevant for your workload and designed to meet your security requirements in a production environment. Plan what controls to put in place to protect access to the Aurora cluster master user credentials. Define the roles and responsibilities of database users to control access to data stored in the Aurora cluster. Take into account database access requirements for applications, scripts, and third-party tools or services. Explore Amazon services and features such as Amazon Secrets Manager and Amazon Identity and Access Management (IAM) authentication.

At this point, you should understand the procedures and best practices for running benchmark tests with Aurora. You might find you need to do additional performance tuning. For details, see Managing performance and scaling for Aurora DB clusters, Amazon Aurora MySQL performance enhancements, Performance and scaling for Amazon Aurora PostgreSQL, and Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora. If you do additional tuning, make sure that you're familiar with the metrics that you gathered during the proof of concept. For a next step, you might create new clusters with different choices for configuration settings, database engine, and database version. Or you might create specialized kinds of Aurora clusters to match the needs of specific use cases.

For example, you can explore Aurora parallel query clusters for hybrid transaction/analytical processing (HTAP) applications. If wide geographic distribution is crucial for disaster recovery or to minimize latency, you can explore Aurora global databases. If your workload is intermittent or you're using Aurora in a development/test scenario, you can explore Aurora Serverless clusters.

Your production clusters might also need to handle high volumes of incoming connections. To learn those techniques, see the Amazon whitepaper Aurora MySQL database administrator's handbook – Connection management.

If, after the proof of concept, you decide that your use case is not suited for Aurora, consider these other Amazon services:

- For purely analytic use cases, workloads benefit from a columnar storage format and other features more suitable to OLAP workloads. Amazon services that address such use cases include the following:
  - Amazon Redshift
  - Amazon EMR
  - Amazon Athena
- Many workloads benefit from a combination of Aurora with one or more of these services. You can move data between these services by using these:
  - Amazon Glue
  - Amazon DMS
  - Importing from Amazon S3, as described in the *Amazon Aurora User Guide*
  - Exporting to Amazon S3, as described in the *Amazon Aurora User Guide*
  - Many other popular ETL tools

Security in Amazon Aurora

Cloud security at Amazon is the highest priority. As an Amazon customer, you benefit from a data center and network architecture that are built to meet the requirements of the most security-sensitive organizations.

Security is a shared responsibility between Amazon and you. The shared responsibility model describes this as security *of* the cloud and security *in* the cloud:

- **Security of the cloud** – Amazon is responsible for protecting the infrastructure that runs Amazon services in the Amazon Cloud. Amazon also provides you with services that you can use securely. Third-party auditors regularly test and verify the effectiveness of our security as part of the Amazon compliance programs. To learn about the compliance programs that apply to Amazon Aurora (Aurora), see Amazon services in scope by compliance program.
- **Security in the cloud** – Your responsibility is determined by the Amazon service that you use. You are also responsible for other factors including the sensitivity of your data, your organization's requirements, and applicable laws and regulations.

This documentation helps you understand how to apply the shared responsibility model when using Amazon Aurora. The following topics show you how to configure Amazon Aurora to meet your security and compliance objectives. You also learn how to use other Amazon services that help you monitor and secure your Amazon Aurora resources.

You can manage access to your Amazon Aurora resources and your databases on a DB cluster. The method you use to manage access depends on what type of task the user needs to perform with Amazon Aurora:

- Run your DB cluster in a virtual private cloud (VPC) based on the Amazon VPC service for the greatest possible network access control. For more information about creating a DB cluster in a VPC, see Amazon VPC and Amazon Aurora .
- Use Amazon Identity and Access Management (IAM) policies to assign permissions that determine who is allowed to manage Amazon Aurora resources. For example, you can use IAM to determine who is allowed to create, describe, modify, and delete DB clusters, tag resources, or modify security groups.

  To review IAM policy examples, see Identity-based policy examples for Amazon Aurora .

- Use security groups to control what IP addresses or Amazon EC2 instances can connect to your databases on a DB cluster. When you first create a DB cluster, its firewall prevents any database access except through rules specified by an associated security group.
- Use Secure Socket Layer (SSL) or Transport Layer Security (TLS) connections with DB clusters running the Aurora MySQL or Aurora PostgreSQL. For more information on using SSL/TLS with a DB cluster, see Using SSL/TLS to encrypt a connection to a DB cluster .
- Use Amazon Aurora encryption to secure your DB clusters and snapshots at rest. Amazon Aurora encryption uses the industry standard AES-256 encryption algorithm to encrypt your data on the server that hosts your DB cluster. For more information, see Encrypting Amazon Aurora resources .
- Use the security features of your DB engine to control who can log in to the databases on a DB cluster. These features work just as if the database was on your local network.

  For information about security with Aurora MySQL, see Security with Amazon Aurora MySQL . For information about security with Aurora PostgreSQL, see Security with Amazon Aurora PostgreSQL .

Aurora is part of the managed database service Amazon Relational Database Service (Amazon RDS). Amazon RDS is a web service that makes it easier to set up, operate, and scale a relational database in the cloud. If you are not already familiar with Amazon RDS, see the *Amazon RDS user guide*.

Aurora includes a high-performance storage subsystem. Its MySQL- and PostgreSQL-compatible database engines are customized to take advantage of that fast distributed storage. Aurora also automates and standardizes database clustering and replication, which are typically among the most challenging aspects of database configuration and administration.

For both Amazon RDS and Aurora, you can access the RDS API programmatically, and you can use the Amazon CLI to access the RDS API interactively. Some RDS API operations and Amazon CLI commands apply to both Amazon RDS and Aurora, while others apply to either Amazon RDS or Aurora. For information about RDS API operations, see Amazon RDS API reference. For more information about the Amazon CLI, see Amazon Command Line Interface reference for Amazon RDS.

> **Note**
>
> You have to configure security only for your use cases. You don't have to configure security access for processes that Amazon Aurora manages. These include creating backups, automatic failover, and other processes.

For more information on managing access to Amazon Aurora resources and your databases on a DB cluster, see the following topics.

Topics

- Database authentication with Amazon Aurora
- Password management with Amazon Aurora and Amazon Secrets Manager
- Data protection in Amazon RDS
- Identity and access management for Amazon Aurora
- Logging and monitoring in Amazon Aurora
- Compliance validation for Amazon Aurora
- Resilience in Amazon Aurora
- Infrastructure security in Amazon Aurora
- Amazon RDS API and interface VPC endpoints (Amazon PrivateLink)
- Security best practices for Amazon Aurora
- Controlling access with security groups
- Master user account privileges
- Using service-linked roles for Amazon Aurora
- Amazon VPC and Amazon Aurora

Database authentication with Amazon Aurora

Amazon Aurora supports several ways to authenticate database users.

Password authentication is available by default for all DB clusters. For Aurora MySQL and Aurora PostgreSQL, you can also add either or both IAM database authentication and Kerberos authentication for the same DB cluster.

Password, Kerberos, and IAM database authentication use different methods of authenticating to the database. Therefore, a specific user can log in to a database using only one authentication method.

For PostgreSQL, use only one of the following role settings for a user of a specific database:

- To use IAM database authentication, assign the `rds_iam` role to the user.
- To use Kerberos authentication, assign the `rds_ad` role to the user.
- To use password authentication, don't assign either the `rds_iam` or `rds_ad` roles to the user.

Don't assign both the `rds_iam` and `rds_ad` roles to a user of a PostgreSQL database either directly or indirectly by nested grant access. If the `rds_iam` role is added to the master user, IAM authentication takes precedence over password authentication so the master user has to log in as an IAM user.

> **Important**
>
> We strongly recommend that you do not use the master user directly in your applications. Instead, adhere to the best practice of using a database user created with the minimal privileges required for your application.

Topics

- Password authentication
- IAM database authentication
- Kerberos authentication

Password authentication

With *password authentication,* your database performs all administration of user accounts. You create users with SQL statements such as `CREATE USER`, with the appropriate clause required by the DB engine for specifying passwords. For example, in MySQL the statement is `CREATE USER` *`name`* `IDENTIFIED BY` *`password`*, while in PostgreSQL, the statement is `CREATE USER` *`name`* `WITH PASSWORD` *`password`*.

With password authentication, your database controls and authenticates user accounts. If a DB engine has strong password management features, they can enhance security. Database

authentication might be easier to administer using password authentication when you have small user communities. Because clear text passwords are generated in this case, integrating with Amazon Secrets Manager can enhance security.

For information about using Secrets Manager with Amazon Aurora, see Creating a basic secret and Rotating secrets for supported Amazon RDS databases in the *Amazon Secrets Manager User Guide*. For information about programmatically retrieving your secrets in your custom applications, see Retrieving the secret value in the *Amazon Secrets Manager User Guide*.

IAM database authentication

You can authenticate to your DB cluster using Amazon Identity and Access Management (IAM) database authentication. With this authentication method, you don't need to use a password when you connect to a DB cluster. Instead, you use an authentication token.

For more information about IAM database authentication, including information about availability for specific DB engines, see IAM database authentication .

Kerberos authentication

Amazon Aurora supports external authentication of database users using Kerberos and Microsoft Active Directory. Kerberos is a network authentication protocol that uses tickets and symmetric-key cryptography to eliminate the need to transmit passwords over the network. Kerberos has been built into Active Directory and is designed to authenticate users to network resources, such as databases.

Amazon Aurora support for Kerberos and Active Directory provides the benefits of single sign-on and centralized authentication of database users. You can keep your user credentials in Active Directory. Active Directory provides a centralized place for storing and managing credentials for multiple DB clusters.

To use credentials from your self-managed Active Directory, you need to setup a trust relationship to the Amazon Directory Service for Microsoft Active Directory that the DB cluster is joined to.

Aurora PostgreSQL and Aurora MySQL support one-way and two-way forest trust relationships with forest-wide authentication or selective authentication.

In some scenarios, you can configure Kerberos authentication over an external trust relationship. This requires your self-managed Active Directory to have additional settings. This includes but is not limited to Kerberos Forest Search Order.

Aurora supports Kerberos authentication for Aurora MySQL and Aurora PostgreSQL DB clusters. For more information, see Using Kerberos authentication for Aurora MySQL and Using Kerberos authentication with Aurora PostgreSQL .

Password management with Amazon Aurora and Amazon Secrets Manager

Amazon Aurora integrates with Secrets Manager to manage master user passwords for your DB clusters.

Topics

- Region and version availability
- Limitations for Secrets Manager integration with Amazon Aurora
- Overview of managing master user passwords with Amazon Secrets Manager
- Benefits of managing master user passwords with Secrets Manager
- Permissions required for Secrets Manager integration
- Enforcing Aurora management of the master user password in Amazon Secrets Manager
- Managing the master user password for a DB cluster with Secrets Manager
- Rotating the master user password secret for a DB cluster
- Viewing the details about a secret for a DB cluster

Region and version availability

Feature availability and support varies across specific versions of each database engine and across Amazon Web Services Regions. For more information about version and Region availability with Secrets Manager integration with Amazon Aurora, see Supported Regions and Aurora DB engines for Secrets Manager integration.

Limitations for Secrets Manager integration with Amazon Aurora

Managing master user passwords with Secrets Manager isn't supported for the following features:

- Amazon RDS Blue/Green Deployments
- DB clusters that are part of an Aurora global database
- Cross-Region read replicas
- Binary log external replication
- Managed master user passwords with the `validate_password` plugin or component enabled on Aurora MySQL

- If the Amazon RDS-managed secret has cross-Region replication enabled (using Amazon Secrets Manager multi-Region secret replication), you can't opt out of Secrets Manager-managed credentials. The `modify-db-cluster` API call with `--no-manage-master-user-password` appears to succeed, but the DB cluster remains on Secrets Manager-managed credentials. To opt out, you must first remove replication from the secret using `aws secretsmanager remove-regions-from-replication`, and then retry the modification.

Overview of managing master user passwords with Amazon Secrets Manager

With Amazon Secrets Manager, you can replace hard-coded credentials in your code, including database passwords, with an API call to Secrets Manager to retrieve the secret programmatically. For more information about Secrets Manager, see the Amazon Secrets Manager User Guide.

When you store database secrets in Secrets Manager, your Amazon Web Services account incurs charges. For information about pricing, see Amazon Secrets Manager Pricing.

You can specify that Aurora manages the master user password in Secrets Manager for an Amazon Aurora DB cluster when you perform one of the following operations:

- Create a DB cluster
- Modify a DB cluster
- Restore a DB cluster from Amazon S3 (Aurora MySQL only)

When you specify that Aurora manages the master user password in Secrets Manager, Aurora generates the password and stores it in Secrets Manager. You can interact directly with the secret to retrieve the credentials for the master user. You can also specify a customer managed key to encrypt the secret, or use the KMS key that is provided by Secrets Manager.

Aurora manages the settings for the secret and rotates the secret every seven days by default. You can modify some of the settings, such as the rotation schedule. If you delete a DB cluster that manages a secret in Secrets Manager, the secret and its associated metadata are also deleted.

To connect to a DB cluster with the credentials in a secret, you can retrieve the secret from Secrets Manager. For more information, see Retrieve secrets from Amazon Secrets Manager and Connect to a SQL database with credentials in an Amazon Secrets Manager secret in the *Amazon Secrets Manager User Guide*.

Benefits of managing master user passwords with Secrets Manager

Managing Aurora master user passwords with Secrets Manager provides the following benefits:

- Aurora automatically generates database credentials.
- Aurora automatically stores and manages database credentials in Amazon Secrets Manager.
- Aurora rotates database credentials regularly, without requiring application changes.
- Secrets Manager secures database credentials from human access and plain text view.
- Secrets Manager allows retrieval of database credentials in secrets for database connections.
- Secrets Manager allows fine-grained control of access to database credentials in secrets using IAM.
- You can optionally separate database encryption from credentials encryption with different KMS keys.
- You can eliminate manual management and rotation of database credentials.
- You can monitor database credentials easily with Amazon CloudTrail and Amazon CloudWatch.

For more information about the benefits of Secrets Manager, see the Amazon Secrets Manager User Guide.

Permissions required for Secrets Manager integration

Users must have the required permissions to perform operations related to Secrets Manager integration. You can create IAM policies that grant permissions to perform specific API operations on the specified resources they need. You can then attach those policies to the IAM permission sets or roles that require those permissions. For more information, see Identity and access management for Amazon Aurora.

For create, modify, or restore operations, the user who specifies that Aurora manages the master user password in Secrets Manager must have permissions to perform the following operations:

- `kms:DescribeKey`
- `secretsmanager:CreateSecret`
- `secretsmanager:TagResource`

The `kms:DescribeKey` permission is required to access your customer-managed key for the `MasterUserSecretKmsKeyId` and to describe `aws/secretsmanager`.

For create, modify, or restore operations, the user who specifies the customer managed key to encrypt the secret in Secrets Manager must have permissions to perform the following operations:

- `kms:Decrypt`
- `kms:GenerateDataKey`
- `kms:CreateGrant`

For modify operations, the user who rotates the master user password in Secrets Manager must have permissions to perform the following operation:

- `secretsmanager:RotateSecret`

Enforcing Aurora management of the master user password in Amazon Secrets Manager

You can use IAM condition keys to enforce Aurora management of the master user password in Amazon Secrets Manager. The following policy doesn't allow users to create or restore DB instances or DB clusters unless the master user password is managed by Aurora in Secrets Manager.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Deny",
            "Action": ["rds:CreateDBInstance", "rds:CreateDBCluster",
 "rds:RestoreDBInstanceFromS3", "rds:RestoreDBClusterFromS3"],
            "Resource": "*",
            "Condition": {
                "Bool": {
                    "rds:ManageMasterUserPassword": false
                }
            }
        }
    ]
}
```

Note

This policy enforces password management in Amazon Secrets Manager at creation. However, you can still disable Secrets Manager integration and manually set a master password by modifying the cluster.
To prevent this, include `rds:ModifyDBInstance`, `rds:ModifyDBCluster` in the action block of the policy. Be aware, this prevents the user from applying any further modifications to existing clusters that don't have Secrets Manager integration enabled.

For more information about using condition keys in IAM policies, see Policy condition keys for Aurora and Example policies: Using condition keys.

Managing the master user password for a DB cluster with Secrets Manager

You can configure Aurora management of the master user password in Secrets Manager when you perform the following actions:

- Creating an Amazon Aurora DB cluster
- Modifying an Amazon Aurora DB cluster
- Migrating data from an external MySQL database to an Amazon Aurora MySQL DB cluster

You can use the RDS console, the Amazon CLI, or the RDS API to perform these actions.

Console


Follow the instructions for creating or modifying a DB cluster with the RDS console:

- Creating a DB cluster
- Modifying a DB instance in a DB cluster


  In the RDS console, you can modify any DB instance to specify the master user password management settings for the entire DB cluster.
- Restoring an Amazon Aurora MySQL DB cluster from an Amazon S3 bucket

When you use the RDS console to perform one of these operations, you can specify that the master user password is managed by Aurora in Secrets Manager. To do so when you are creating or restoring a DB cluster, select **Manage master credentials in Amazon Secrets Manager** in **Credential settings**. When you are modifying a DB cluster, select **Manage master credentials in Amazon Secrets Manager** in **Settings**.

The following image is an example of the **Manage master credentials in Amazon Secrets Manager** setting when you are creating or restoring a DB cluster.

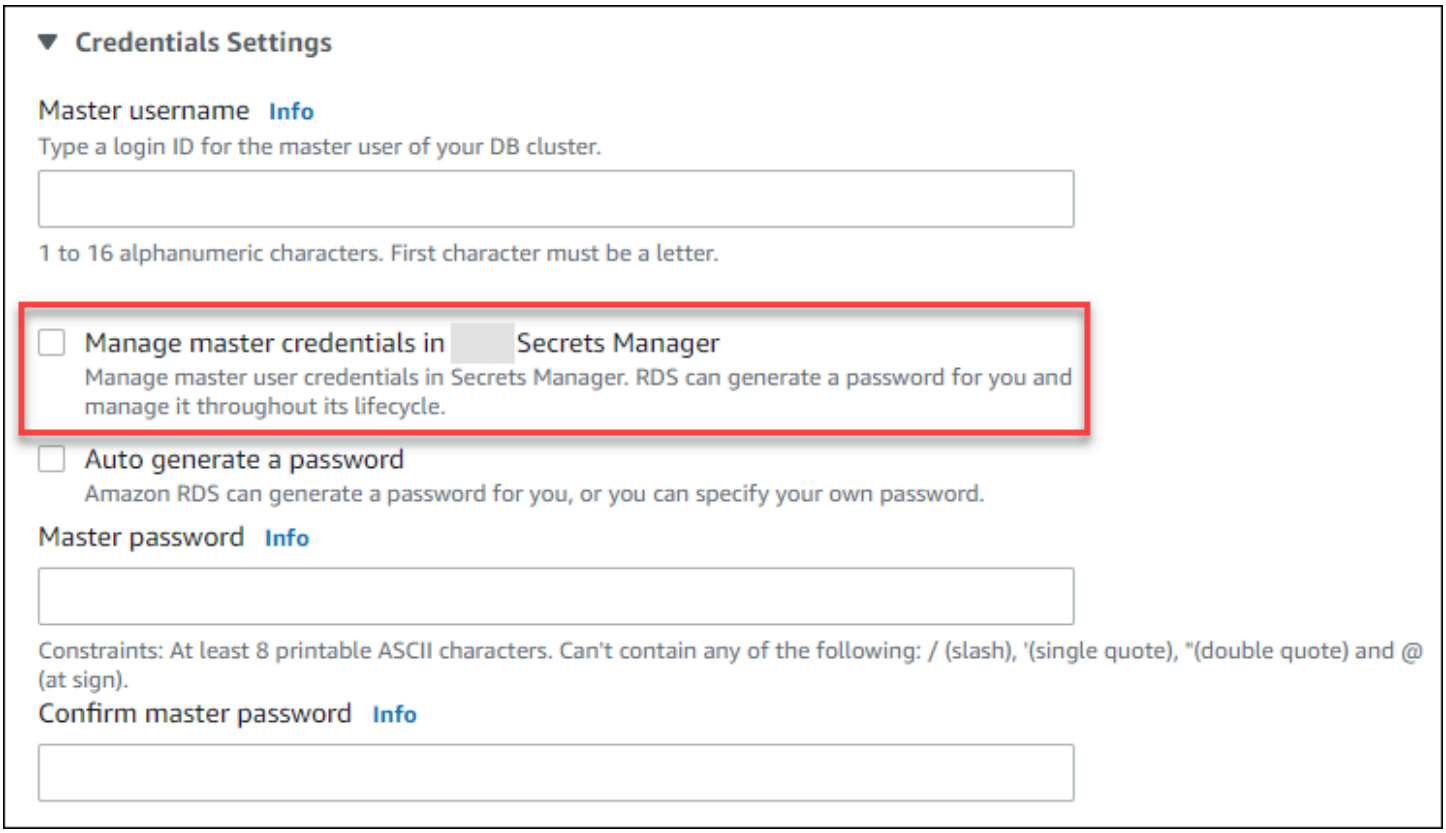

When you select this option, Aurora generates the master user password and manages it throughout its lifecycle in Secrets Manager.

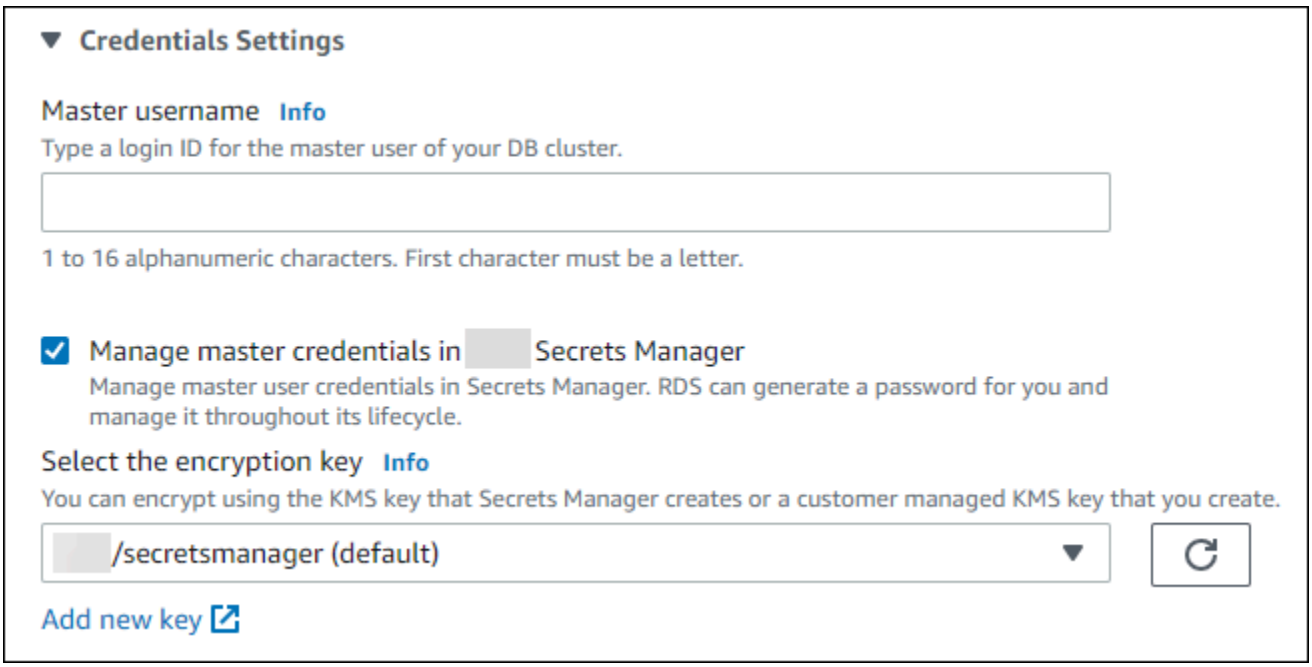

You can choose to encrypt the secret with a KMS key that Secrets Manager provides or with a customer managed key that you create. After Aurora is managing the database credentials for a DB cluster, you can't change the KMS key that is used to encrypt the secret.

You can choose other settings to meet your requirements.

For more information about the available settings when you are creating a DB cluster, see Settings for Aurora DB clusters. For more information about the available settings when you are modifying a DB cluster, see Settings for Amazon Aurora.

Amazon CLI

To specify that Aurora manages the master user password in Secrets Manager, specify the `--manage-master-user-password` option in one of the following commands:

- create-db-cluster
- modify-db-cluster
- restore-db-cluster-from-s3

When you specify the `--manage-master-user-password` option in these commands, Aurora generates the master user password and manages it throughout its lifecycle in Secrets Manager.

To encrypt the secret, you can specify a customer managed key or use the default KMS key that is provided by Secrets Manager. Use the `--master-user-secret-kms-key-id` option to specify

a customer managed key. The Amazon KMS key identifier is the key ARN, key ID, alias ARN, or alias name for the KMS key. To use a KMS key in a different Amazon Web Services account, specify the key ARN or alias ARN. After Aurora is managing the database credentials for a DB cluster, you can't change the KMS key that is used to encrypt the secret.

You can choose other settings to meet your requirements.

For more information about the available settings when you are creating a DB cluster, see Settings for Aurora DB clusters. For more information about the available settings when you are modifying a DB cluster, see Settings for Amazon Aurora.

This example creates a DB cluster and specifies that Aurora manages the password in Secrets Manager. The secret is encrypted using the KMS key that is provided by Secrets Manager.

Example

For Linux, macOS, or Unix:

```
aws rds create-db-cluster \
     --db-cluster-identifier sample-cluster \
     --engine aurora-mysql \
     --engine-version 8.0 \
     --master-username admin \
     --manage-master-user-password
```

For Windows:

```
aws rds create-db-cluster ^
     --db-cluster-identifier sample-cluster ^
     --engine aurora-mysql ^
     --engine-version 8.0 ^
     --master-username admin ^
     --manage-master-user-password
```

RDS API

To specify that Aurora manages the master user password in Secrets Manager, set the `ManageMasterUserPassword` parameter to `true` in one of the following operations:

- CreateDBCluster

- ModifyDBCluster
- RestoreDBClusterFromS3

When you set the `ManageMasterUserPassword` parameter to `true` in one of these operations, Aurora generates the master user password and manages it throughout its lifecycle in Secrets Manager.

To encrypt the secret, you can specify a customer managed key or use the default KMS key that is provided by Secrets Manager. Use the `MasterUserSecretKmsKeyId` parameter to specify a customer managed key. The Amazon KMS key identifier is the key ARN, key ID, alias ARN, or alias name for the KMS key. To use a KMS key in a different Amazon Web Services account, specify the key ARN or alias ARN. After Aurora is managing the database credentials for a DB cluster, you can't change the KMS key that is used to encrypt the secret.

Rotating the master user password secret for a DB cluster


When Aurora rotates a master user password secret, Secrets Manager generates a new secret version for the existing secret. The new version of the secret contains the new master user password. Aurora changes the master user password for the DB cluster to match the password for the new secret version.

You can rotate a secret immediately instead of waiting for a scheduled rotation. To rotate a master user password secret in Secrets Manager, modify the DB cluster. For information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

You can rotate a master user password secret immediately with the RDS console, the Amazon CLI, or the RDS API. The new password is always 28 characters long and contains atleast one upper and lowercase character, one number, and one punctuation.

Console

To rotate a master user password secret using the RDS console, modify the DB cluster and select **Rotate secret immediately** in **Settings**.

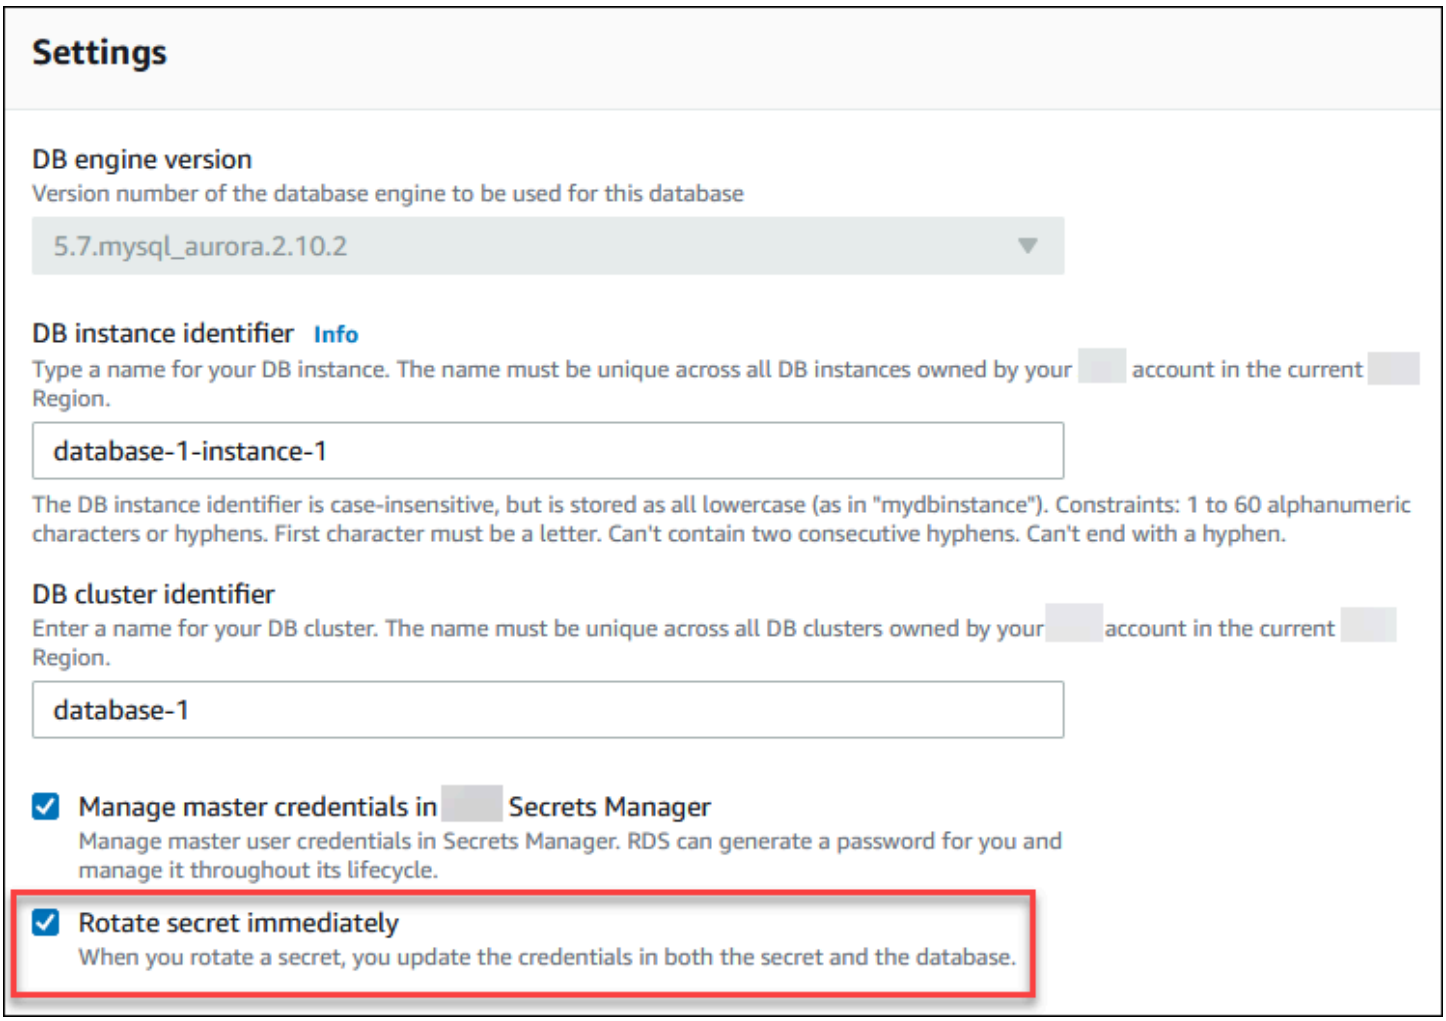

Follow the instructions for modifying a DB cluster with the RDS console in Modifying the DB cluster by using the console, CLI, and API. You must choose **Apply immediately** on the confirmation page.

Amazon CLI

To rotate a master user password secret using the Amazon CLI, use the modify-db-cluster command and specify the `--rotate-master-user-password` option. You must specify the `--apply-immediately` option when you rotate the master password.

This example rotates a master user password secret.

Example

For Linux, macOS, or Unix:

```
aws rds modify-db-cluster \
```

```
    --db-cluster-identifier mydbcluster \
    --rotate-master-user-password \
    --apply-immediately
```

For Windows:

```
aws rds modify-db-cluster ^
    --db-cluster-identifier mydbcluster ^
    --rotate-master-user-password ^
    --apply-immediately
```

RDS API

You can rotate a master user password secret using the ModifyDBCluster operation and setting the `RotateMasterUserPassword` parameter to `true`. You must set the `ApplyImmediately` parameter to `true` when you rotate the master password.

Viewing the details about a secret for a DB cluster

You can retrieve your secrets using the console (https://console.amazonaws.cn/secretsmanager/) or the Amazon CLI (get-secret-value Secrets Manager command).


You can find the Amazon Resource Name (ARN) of a secret managed by Aurora in Secrets Manager with the RDS console, the Amazon CLI, or the RDS API.

Console

To view the details about a secret managed by Aurora in Secrets Manager

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the name of the DB cluster to show its details.
4. Choose the **Configuration** tab.

   In **Master Credentials ARN**, you can view the secret ARN.

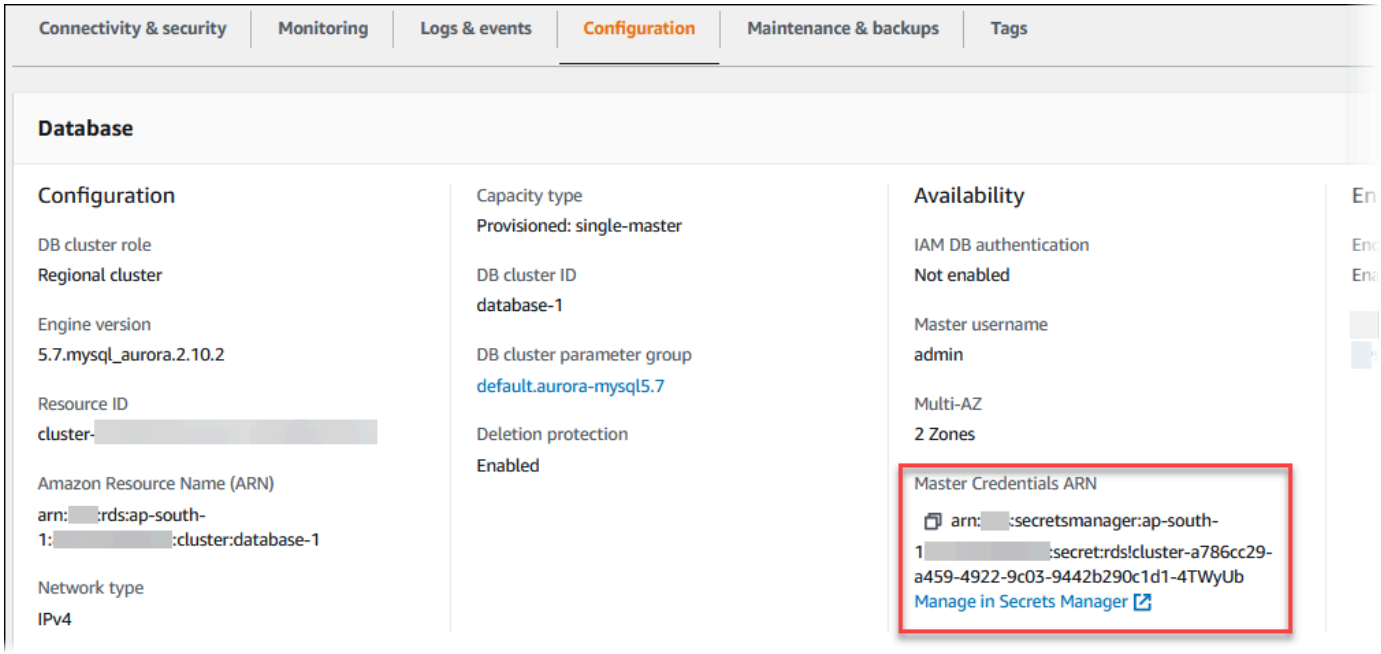

You can follow the **Manage in Secrets Manager** link to view and manage the secret in the Secrets Manager console.

Amazon CLI

You can use the RDS Amazon CLI describe-db-clusters command to find the following information about a secret managed by Aurora in Secrets Manager:

- `SecretArn` – The ARN of the secret
- `SecretStatus` – The status of the secret

  The possible status values include the following:

  - `creating` – The secret is being created.
  - `active` – The secret is available for normal use and rotation.
  - `rotating` – The secret is being rotated.
  - `impaired` – The secret can be used to access database credentials, but it can't be rotated. A secret might have this status if, for example, permissions are changed so that RDS can no longer access the secret or the KMS key for the secret.

    When a secret has this status, you can correct the condition that caused the status. If you correct the condition that caused status, the status remains `impaired` until the next rotation. Alternatively, you can modify the DB cluster to turn off automatic management of database

credentials, and then modify the DB cluster again to turn on automatic management of database credentials. To modify the DB cluster, use the `--manage-master-user-password` option in the modify-db-cluster command.

- `KmsKeyId` – The ARN of the KMS key that is used to encrypt the secret

Specify the `--db-cluster-identifier` option to show output for a specific DB cluster. This example shows the output for a secret that is used by a DB cluster.

Example

```
aws rds describe-db-clusters --db-cluster-identifier mydbcluster
```

The following sample shows the output for a secret:

```
"MasterUserSecret": {
                "SecretArn": "arn:aws:secretsmanager:eu-west-1:123456789012:secret:rds!
cluster-033d7456-2c96-450d-9d48-f5de3025e51c-xmJRDx",
                "SecretStatus": "active",
                "KmsKeyId": "arn:aws:kms:eu-
west-1:123456789012:key/0987dcba-09fe-87dc-65ba-ab0987654321"
            }
```

When you have the secret ARN, you can view details about the secret using the get-secret-value Secrets Manager CLI command.

This example shows the details for the secret in the previous sample output.

Example

For Linux, macOS, or Unix:

```
aws secretsmanager get-secret-value \
    --secret-id 'arn:aws:secretsmanager:eu-west-1:123456789012:secret:rds!
cluster-033d7456-2c96-450d-9d48-f5de3025e51c-xmJRDx'
```

For Windows:

```
aws secretsmanager get-secret-value ^
    --secret-id 'arn:aws:secretsmanager:eu-west-1:123456789012:secret:rds!
cluster-033d7456-2c96-450d-9d48-f5de3025e51c-xmJRDx'
```

RDS API

You can view the ARN, status, and KMS key for a secret managed by Aurora in Secrets Manager using the DescribeDBClusters RDS operation and setting the `DBClusterIdentifier` parameter to a DB cluster identifier. Details about the secret are included in the output.

When you have the secret ARN, you can view details about the secret using the GetSecretValue Secrets Manager operation.

Data protection in Amazon RDS

The Amazon shared responsibility model applies to data protection in Amazon Relational Database Service. As described in this model, Amazon is responsible for protecting the global infrastructure that runs all of the Amazon Web Services Cloud. You are responsible for maintaining control over your content that is hosted on this infrastructure. You are also responsible for the security configuration and management tasks for the Amazon Web Services services that you use. For more information about data privacy, see Amazon China Region Legal Terms.

For data protection purposes, we recommend that you protect Amazon Web Services account credentials and set up individual users with Amazon IAM Identity Center or Amazon Identity and Access Management (IAM). That way, each user is given only the permissions necessary to fulfill their job duties. We also recommend that you secure your data in the following ways:

- Use multi-factor authentication (MFA) with each account.
- Use SSL/TLS to communicate with Amazon resources. We require TLS 1.2 and recommend TLS 1.3.
- Set up API and user activity logging with Amazon CloudTrail. For information about using CloudTrail trails to capture Amazon activities, see Working with CloudTrail trails in the *Amazon CloudTrail User Guide*.
- Use Amazon encryption solutions, along with all default security controls within Amazon Web Services services.
- Use advanced managed security services such as Amazon Macie, which assists in discovering and securing sensitive data that is stored in Amazon S3.
- If you require FIPS 140-3 validated cryptographic modules when accessing Amazon through a command line interface or an API, use a FIPS endpoint. For more information about the available FIPS endpoints, see Federal Information Processing Standard (FIPS) 140-3.

We strongly recommend that you never put confidential or sensitive information, such as your customers' email addresses, into tags or free-form text fields such as a **Name** field. This includes when you work with Amazon RDS or other Amazon Web Services services using the console, API, Amazon CLI, or Amazon SDKs. Any data that you enter into tags or free-form text fields used for names may be used for billing or diagnostic logs. If you provide a URL to an external server, we strongly recommend that you do not include credentials information in the URL to validate your request to that server.

Topics

- Protecting data using encryption
- Internetwork traffic privacy

Protecting data using encryption

Amazon Aurora encrypts database resources at the storage layer. You can also encrypt connections to DB clusters.

Topics

- Encrypting Amazon Aurora resources
- Amazon KMS key management
- Using SSL/TLS to encrypt a connection to a DB cluster
- Rotating your SSL/TLS certificate

Encrypting Amazon Aurora resources

Amazon Aurora protects your data both at rest and in transit—whether moving between on-premises clients and Amazon Aurora, or between Amazon Aurora and other Amazon resources. Amazon Aurora encrypts all user data in your Amazon Aurora DB clusters including logs, automated backups, and snapshots.

After your data is encrypted, Amazon Aurora handles authentication of access and decryption of your data transparently with a minimal impact on performance. You don't need to modify your database client applications to use encryption.

> **Note**
>
> For encrypted and unencrypted DB clusters, data that is in transit between the source and the read replicas is encrypted, even when replicating across Amazon Regions.

Topics

- Overview of encryption in Amazon Aurora resources
- Encrypting an Amazon Aurora DB cluster
- Determining whether encryption is turned on for a DB cluster
- Availability of Amazon Aurora encryption
- Encryption in transit
- Limitations of Amazon Aurora encrypted DB clusters

Overview of encryption in Amazon Aurora resources

Amazon Aurora encrypted DB clusters provide an additional layer of data protection by securing your data from unauthorized access to the underlying storage. All new database clusters created on or after March 3, 2026, in Amazon Aurora are encrypted at rest using industry standard AES-256 encryption. This encryption happens automatically in the background, securing your data without requiring any action from you. It also helps reduce the operational burden and complexity involved in protecting sensitive data. With encryption at rest, you can secure compliance-sensitive and security-critical applications against both accidental and malicious threats while meeting regulatory requirements.

Amazon Aurora uses an Amazon Key Management Service key to encrypt these resources. Amazon KMS combines secure, highly available hardware and software to provide a key management system scaled for the cloud. When creating a new database cluster, Amazon Aurora uses Server-Side Encryption (SSE) with an Amazon-owned key by default. This default applies only to the new cluster itself. Clones, snapshot copies, and Amazon Aurora replicas (read instances) created from an unencrypted source are not automatically encrypted. They inherit the encryption state of their source. However, you can choose from three encryption types based on your security and compliance needs:

- **Amazon owned key (SSE-RDS)** – A fully Amazon-controlled encryption key that you cannot view or manage, used automatically by Aurora for default encryption.

- **Amazon managed key (AMK)** – This key is created and managed by Amazon and is visible in your account but not customizable. There is no monthly fee, but Amazon KMS API charges will apply.
- **Customer managed key (CMK)** – The key is stored in your account and is created, owned, and managed by you. You have full control over the KMS key (Amazon KMS charges apply).

Amazon managed keys are a legacy encryption option that remains available for backward compatibility. Amazon Aurora uses Amazon-owned keys by default to encrypt your data, providing strong security protection without additional charges or management overhead. For most use cases, we recommend using either the default Amazon-owned key for simplicity and cost efficiency, or a customer managed key (CMK) if you require full control over your encryption keys. For more information about key types, see customer managed keys and Amazon managed keys.

> **Note**
>
> **Important:** For source database instances or clusters created before March 3, 2026, where you did not opt in for encryption, snapshots, clones, and Amazon Aurora replicas (read instance) created from those sources will remain unencrypted. However, restore operations outside the Amazon Aurora cluster will produce encrypted instances.

For an Amazon Aurora encrypted DB cluster, all DB instances, logs, backups, and snapshots are encrypted. For more information about the availability and limitations of encryption, see Availability of Amazon Aurora encryption and Limitations of Amazon Aurora encrypted DB clusters.

When you create an encrypted DB cluster, you can choose a customer managed key or the Amazon managed key for Amazon Aurora to encrypt your DB cluster, if you don't specify the key identifier for a customer managed key, Amazon Aurora uses the Amazon managed key for your new DB cluster. Amazon Aurora creates an Amazon managed key for Amazon Aurora for your Amazon account. Your Amazon account has a different Amazon managed key for Amazon Aurora for each Amazon Region.

To manage the customer managed keys used for encrypting and decrypting your Amazon Aurora resources, you use the Amazon Key Management Service (Amazon KMS).

Using Amazon KMS, you can create customer managed keys and define the policies to control the use of these customer managed keys. Amazon KMS supports CloudTrail, so you can audit KMS key usage to verify that customer managed keys are being used appropriately. You can use your customer managed keys with Amazon Aurora and supported Amazon services such as Amazon S3,

Amazon EBS, and Amazon Redshift. For a list of services that are integrated with Amazon KMS, see Amazon Service Integration. Some considerations about using KMS keys:

- Once you create an encrypted DB instance, you cannot change the KMS key used by that instance. Be sure to determine your KMS key requirements before creating your encrypted DB instance. If you need to change the encryption key for your DB cluster, follow these steps:
  - Create a manual snapshot of your cluster.
  - Restore the snapshot and enable encryption with your desired KMS key during the restore operation. You cannot enable encryption with an Amazon owned key if your cluster was originally encrypted with an Amazon managed key or a customer managed key.
- If you restore an unencrypted snapshot and choose no encryption, the database cluster created will be encrypted using the default encryption at rest (Amazon-owned key).
- You can't share a snapshot that has been encrypted using the Amazon managed key of the Amazon account that shared the snapshot.
- Each DB instance in the DB cluster shares the same storage encrypted with the same KMS key.

Important

Amazon Aurora can lose access to the KMS key for a DB cluster when you disable the KMS key. In these cases, the encrypted DB cluster goes into `inaccessible-encryption-credentials-recoverable` state. The DB cluster remains in this state for seven days, during which the instance is stopped. API calls made to the DB cluster during this time might not succeed. To recover the DB cluster, enable the KMS key and restart this DB cluster. You can enable the KMS key from the Amazon Web Services Management Console, Amazon CLI, or RDS API. Restart the DB cluster using the Amazon CLI command start-db-cluster or Amazon Web Services Management Console.

The `inaccessible-encryption-credentials-recoverable` state only applies to DB clusters that can stop. This recoverable state is not applicable to instances that can't stop, such as clusters with cross-Region read replicas. For more information, see the section called “Limitations”.

If the DB cluster isn't recovered within seven days, it goes into the terminal `inaccessible-encryption-credentials` state. In this state, the DB cluster is not usable anymore and you can only restore the DB cluster from a backup. We strongly recommend that you always turn on backups to guard against the loss of data in your databases.

During the creation of a DB cluster, Aurora checks if the calling principal has access to the KMS key and generates a grant from the KMS key that it uses for the entire lifetime of the DB cluster. Revoking the calling principals access to the KMS key does not affect a running database. When using KMS keys in cross-account scenarios, such as copying a snapshot to another account, the KMS key needs to be shared with the other account. If you create a DB cluster from the snapshot without specifying a different KMS key, the new cluster uses the KMS key from the source account. Revoking access to the key after you create the DB cluster does not affect the cluster. However, disabling the key impacts all DB clusters encrypted with that key. To prevent this, specify a different key during the snapshot copy operation.

For more information about KMS keys, see Amazon KMS keys in the *Amazon Key Management Service Developer Guide* and Amazon KMS key management.

Encrypting an Amazon Aurora DB cluster

All new DB clusters created on or after March 3, 2026, are encrypted by default with an Amazon owned key.

To encrypt a new DB cluster, using Amazon managed key or customer managed key, choose the option on the console. For information on creating a DB cluster, see Creating an Amazon Aurora DB cluster.

If you use the create-db-cluster Amazon CLI command to create an encrypted DB cluster, set the `--storage-encrypted` parameter. If you use the CreateDBCluster API operation, set the `StorageEncrypted` parameter to true.

Once you have created an encrypted DB cluster, you can't change the KMS key used by that DB cluster. Therefore, be sure to determine your KMS key requirements before you create your encrypted DB cluster.

You can also use a blue/green deployment to create a green environment that's encrypted with a different KMS key than the blue environment. Use this deployment to encrypt an unencrypted DB cluster or to change the KMS key of an encrypted DB cluster. For more information about blue/green deployments, see Limitations and considerations for Amazon Aurora blue/green deployments.

If you use the Amazon CLI `create-db-cluster` command to create an encrypted DB cluster with a customer managed key, set the `--kms-key-id` parameter to any key identifier for the KMS key.

If you use the Amazon RDS API `CreateDBInstance` operation, set the `KmsKeyId` parameter to any key identifier for the KMS key. To use a customer managed key in a different Amazon account, specify the key ARN or alias ARN.


Determining whether encryption is turned on for a DB cluster

You can use the Amazon Web Services Management Console, Amazon CLI, or RDS API to determine whether encryption at rest is turned on for a DB cluster.

Console

To determine whether encryption at rest is turned on for a DB cluster

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the name of the DB cluster that you want to check to view its details.
4. Choose the **Configuration** tab and check the **Encryption** value.

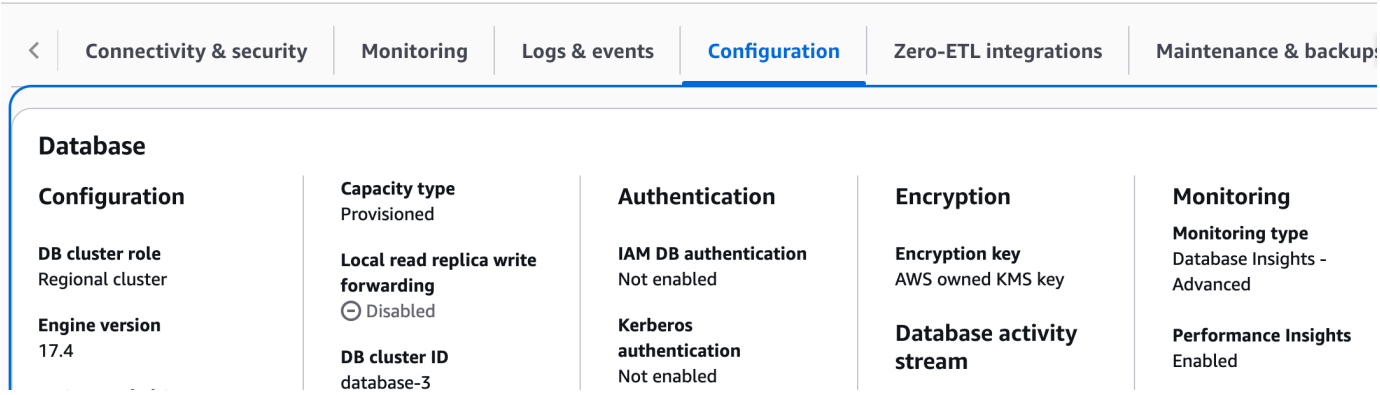

Amazon CLI

To determine whether encryption at rest is turned on for a DB cluster by using the Amazon CLI, call the describe-db-clusters command with the following option:

- `--db-cluster-identifier` – The name of the DB cluster.

The following example uses a query to return either TRUE or FALSE regarding encryption at rest for the `mydb` DB cluster.

Example

```
aws rds describe-db-clusters --db-cluster-identifier mydb --query "*[].
{StorageEncrypted:StorageEncrypted}" --output text
```

RDS API

To determine whether encryption at rest is turned on for a DB cluster by using the Amazon RDS API, call the DescribeDBClusters operation with the following parameter:

- `DBClusterIdentifier` – The name of the DB cluster.

Availability of Amazon Aurora encryption

Amazon Aurora encryption is currently available for all database engines and storage types.

> **Note**
>
> Amazon Aurora encryption is not available for the db.t2.micro DB instance class.

Encryption in transit

Encryption at the physical layer

All data flowing accross Amazon Web Services Regions over the Amazon global network is automatically encrypted at the physical layer before it leaves Amazon secured facilities. All traffic between AZs is encrypted. Additional layers of encryption, including those listed in this section may provide additional protections.

Encryption provided by Amazon VPC peering and Transit Gateway cross-Region peering

All cross-Region traffic that uses Amazon VPC and Transit Gateway peering is automatically bulk-encrypted when it exits a Region. An additional layer of encryption is automatically provided at the physical layer for all traffic before it leaves Amazon secured facilities.

Encryption between instances

Amazon provides secure and private connectivity between DB instances of all types. In addition, some instance types use the offload capabilities of the underlying Nitro System hardware to automatically encrypt in-transit traffic between instances. This encryption uses Authenticated

Encryption with Associated Data (AEAD) algorithms, with 256-bit encryption. There is no impact on network performance. To support this additional in-transit traffic encryption between instances, the following requirements must be met:

- The instances use the following instance types:
  - **General purpose**: M6i, M6id, M6in, M6idn, M7g
  - **Memory optimized**: R6i, R6id, R6in, R6idn, R7g, X2idn, X2iedn, X2iezn
- The instances are in the same Amazon Web Services Region.
- The instances are in the same VPC or peered VPCs, and the traffic does not pass through a virtual network device or service, such as a load balancer or a transit gateway.

Limitations of Amazon Aurora encrypted DB clusters

The following limitations exist for Amazon Aurora encrypted DB clusters:

- You can't turn off encryption on an encrypted DB cluster.
- If you have an existing unencrypted cluster, all snapshots created from that cluster are also unencrypted. You can't encrypt an unencrypted Aurora DB cluster snapshot by copying it.
- You can't create an encrypted snapshot of an unencrypted DB cluster.
- A snapshot of an encrypted DB cluster must be encrypted using the same KMS key as the DB cluster.
- You can't convert an unencrypted DB cluster to an encrypted one. However, you can restore an unencrypted snapshot to an encrypted Aurora DB cluster. To do this, specify a KMS key when you restore from the unencrypted snapshot.
- If you have an existing unencrypted cluster, any Amazon Aurora replica (read instance) created from that cluster will also be unencrypted. To create an encrypted cluster from an unencrypted cluster, you need to restore the database cluster. The restored cluster will be encrypted by default after the restore operation.
- To copy an encrypted snapshot from one Amazon Region to another, you must specify the KMS key in the destination Amazon Region. This is because KMS keys are specific to the Amazon Region that they are created in.

  The source snapshot remains encrypted throughout the copy process. Amazon Aurora uses envelope encryption to protect data during the copy process. For more information about envelope encryption, see Envelope encryption in the *Amazon Key Management Service Developer Guide*.

- You can't unencrypt an encrypted DB cluster. However, you can export data from an encrypted DB cluster and import the data into an unencrypted DB cluster.

Amazon KMS key management

Amazon Aurora automatically integrates with Amazon Key Management Service (Amazon KMS) for key management. Amazon Aurora uses envelope encryption. For more information about envelope encryption, see Envelope encryption in the *Amazon Key Management Service Developer Guide*.

You can use two types of Amazon KMS keys to encrypt your DB clusters.

- If you want full control over a KMS key, you must create a *customer managed key*. For more information about customer managed keys, see Customer managed keys in the *Amazon Key Management Service Developer Guide*.
- *Amazon managed keys* are KMS keys in your account that are created, managed, and used on your behalf by an Amazon service that is integrated with Amazon KMS. By default, the RDS Amazon managed key (`aws/rds`) is used for encryption. You can't manage, rotate, or delete the RDS Amazon managed key. For more information about Amazon managed keys, see Amazon managed keys in the *Amazon Key Management Service Developer Guide*.

To manage KMS keys used for Amazon Aurora encrypted DB clusters, use the Amazon Key Management Service (Amazon KMS) in the Amazon KMS console, the Amazon CLI, or the Amazon KMS API. To view audit logs of every action taken with an Amazon managed or customer managed key, use Amazon CloudTrail. For more information about key rotation, see Rotating Amazon KMS keys.

Authorizing use of a customer managed key

When Aurora uses a customer managed key in cryptographic operations, it acts on behalf of the user who is creating or changing the Aurora resource.

To create an Aurora resource using a customer managed key, a user must have permissions to call the following operations on the customer managed key:

- `kms:CreateGrant`
- `kms:DescribeKey`

You can specify these required permissions in a key policy, or in an IAM policy if the key policy allows it.

> **Important**
>
> When you use explicit deny statements for all resources (*) in Amazon KMS key policies with managed services like Amazon RDS, you must specify a condition to allow the resource owning account. Operations might fail without this condition, even if the deny rule includes exceptions for your IAM user.

> **Tip**
>
> To follow the principle of least privilege, do not allow full access to `kms:CreateGrant`. Instead, use the kms:ViaService condition key to allow the user to create grants on the KMS key only when the grant is created on the user's behalf by an Amazon service.

You can make the IAM policy stricter in various ways. For example, if you want to allow the customer managed key to be used only for requests that originate in Aurora, use the kms:ViaService condition key with the `rds.<region>.amazonaws.com` value. Also, you can use the keys or values in the Amazon RDS encryption context as a condition for using the customer managed key for encryption.

For more information, see Allowing users in other accounts to use a KMS key in the *Amazon Key Management Service Developer Guide* and Key policies in Amazon KMS.

Amazon RDS encryption context

When Aurora uses your KMS key, or when Amazon EBS uses the KMS key on behalf of Aurora, the service specifies an encryption context. The encryption context is additional authenticated data (AAD) that Amazon KMS uses to ensure data integrity. When an encryption context is specified for an encryption operation, the service must specify the same encryption context for the decryption operation. Otherwise, decryption fails. The encryption context is also written to your Amazon CloudTrail logs to help you understand why a given KMS key was used. Your CloudTrail logs might contain many entries describing the use of a KMS key, but the encryption context in each log entry can help you determine the reason for that particular use.

At minimum, Aurora always uses the DB cluster ID for the encryption context, as in the following JSON-formatted example:

```
{ "aws:rds:dbc-id": "cluster-CQYSMDPBRZ7BPMH7Y3RTDG5QY" }
```

This encryption context can help you identify the DB cluster for which your KMS key was used.

When your KMS key is used for a specific DB cluster and a specific Amazon EBS volume, both the DB cluster ID and the Amazon EBS volume ID are used for the encryption context, as in the following JSON-formatted example:

```
{
  "aws:rds:dbc-id": "cluster-BRG7VYS3SVIFQW7234EJQOM5RQ",
  "aws:ebs:id": "vol-ad8c6542"
}
```

Using SSL/TLS to encrypt a connection to a DB cluster

You can use Secure Socket Layer (SSL) or Transport Layer Security (TLS) from your application to encrypt a connection to a DB cluster running Aurora MySQL or Aurora PostgreSQL.

SSL/TLS connections provide a layer of security by encrypting data that moves between your client and DB cluster. Optionally, your SSL/TLS connection can perform server identity verification by validating the server certificate installed on your database. To require server identity verification, follow this general process:

1. Choose the **certificate authority (CA)** that signs the **DB server certificate,** for your database. For more information about certificate authorities, see Certificate authorities .
2. Download a certificate bundle to use when you are connecting to the database. To download a certificate bundle, see Certificate bundles for specific Amazon Web Services Regions .


   > **Note**
   >
   > All certificates are only available for download using SSL/TLS connections.

3. Connect to the database using your DB engine's process for implementing SSL/TLS connections. Each DB engine has its own process for implementing SSL/TLS. To learn how to implement SSL/TLS for your database, follow the link that corresponds to your DB engine:
   - Security with Amazon Aurora MySQL

- Security with Amazon Aurora PostgreSQL

Certificate authorities

The **certificate authority (CA)** is the certificate that identifies the root CA at the top of the certificate chain. The CA signs the **DB server certificate,** which is installed on each DB instance. The DB server certificate identifies the DB instance as a trusted server.

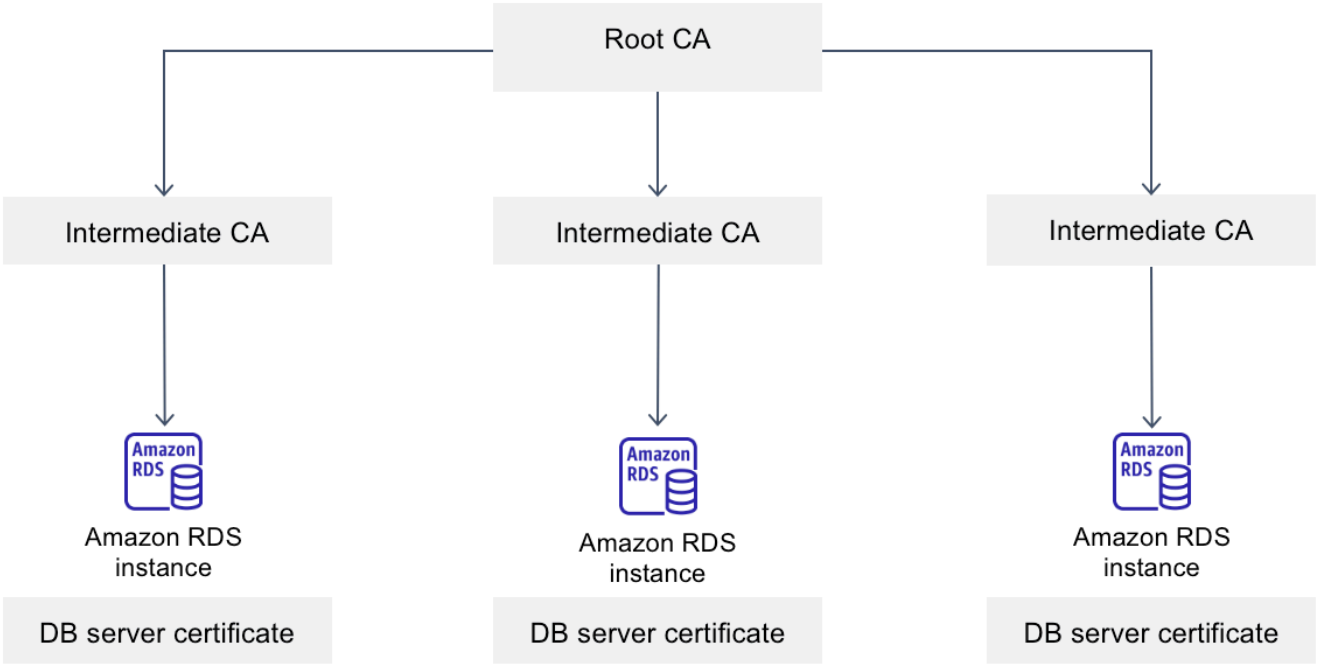

Amazon RDS provides the following CAs to sign the DB server certificate for a database.

Certificate authority (CA)	Description	Common name (CN)
rds-ca-rsa2048-g1	Uses a certificate authority with RSA 2048 private key algorithm and SHA256 signing algorithm in most Amazon Web Services Regions. In the Amazon GovCloud (US) Regions, this CA uses a certificate authority with	Amazon RDS *region-id entifier* Root CA RSA2048 G1

Certificate authority (CA)	Description	Common name (CN)
	RSA 2048 private key algorithm and SHA384 signing algorithm. This CA supports automatic server certificate rotation.	
rds-ca-rsa4096-g1	Uses a certificate authority with RSA 4096 private key algorithm and SHA384 signing algorithm. This CA supports automatic server certificate rotation.	Amazon RDS *region-id entifier* Root CA RSA4096 G1
rds-ca-ecc384-g1	Uses a certificate authority with ECC 384 private key algorithm and SHA384 signing algorithm. This CA supports automatic server certificate rotation.	Amazon RDS *region-id entifier* Root CA ECC384 G1

Note

If you are using the Amazon CLI, you can see the validities of the certificate authorities listed above by using describe-certificates.

These CA certificates are included in the regional and global certificate bundle. When you use the rds-ca-rsa2048-g1 CA with a database, RDS manages the DB server certificate on the database. RDS rotates the DB server certificate automatically before it expires.

Setting the CA for your database


You can set the CA for a database when you perform the following tasks:

- Create an Aurora DB cluster – You can set the CA for a DB instance in an Aurora cluster when you create the first DB instance in the DB cluster using the Amazon CLI or RDS API. Currently, you can't set the CA for the DB instances in a DB cluster when you create the DB cluster using the RDS console. For instructions, see Creating an Amazon Aurora DB cluster .

- Modify a DB instance – You can set the CA for a DB instance in a DB cluster by modifying it. For instructions, see Modifying a DB instance in a DB cluster .

> **Note**
>
> The default CA is set to rds-ca-rsa2048-g1. You can override the default CA for your Amazon Web Services account by using the modify-certificates command.

The available CAs depend on the DB engine and DB engine version. When you use the Amazon Web Services Management Console, you can choose the CA using the **Certificate authority** setting, as shown in the following image.

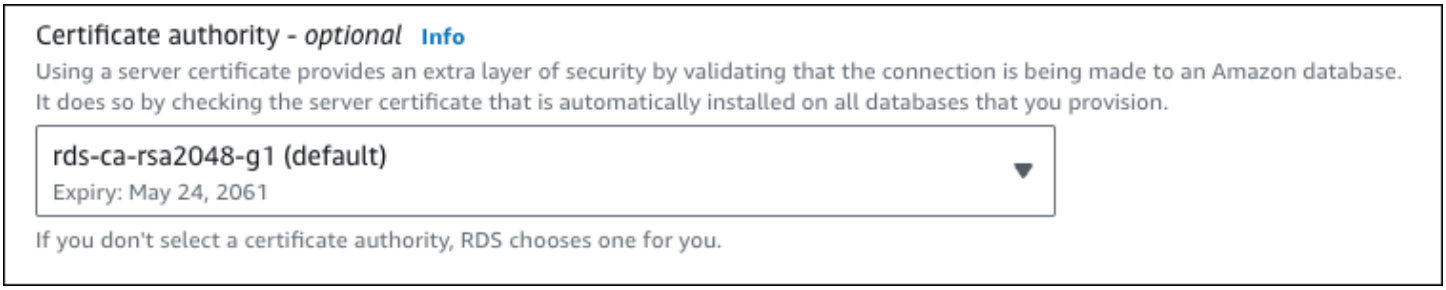

The console only shows the CAs that are available for the DB engine and DB engine version. If you're using the Amazon CLI, you can set the CA for a DB instance using the create-db-instance or modify-db-instance command.

If you're using the Amazon CLI, you can see the available CAs for your account by using the describe-certificates command. This command also shows the expiration date for each CA in `ValidTill` in the output. You can find the CAs that are available for a specific DB engine and DB engine version using the describe-db-engine-versions command.

The following example shows the CAs available for the default RDS for PostgreSQL DB engine version.

```
aws rds describe-db-engine-versions --default-only --engine postgres
```

Your output is similar to the following. The available CAs are listed in `SupportedCACertificateIdentifiers`. The output also shows whether the DB engine version supports rotating the certificate without restart in `SupportsCertificateRotationWithoutRestart`.

```
{
    "DBEngineVersions": [
        {
            "Engine": "postgres",
            "MajorEngineVersion": "13",
            "EngineVersion": "13.4",
            "DBParameterGroupFamily": "postgres13",
            "DBEngineDescription": "PostgreSQL",
            "DBEngineVersionDescription": "PostgreSQL 13.4-R1",
            "ValidUpgradeTarget": [],
            "SupportsLogExportsToCloudwatchLogs": false,
            "SupportsReadReplica": true,
            "SupportedFeatureNames": [
                "Lambda"
            ],
            "Status": "available",
            "SupportsParallelQuery": false,
            "SupportsGlobalDatabases": false,
            "SupportsBabelfish": false,
            "SupportsCertificateRotationWithoutRestart": true,
            "SupportedCACertificateIdentifiers": [
                "rds-ca-rsa2048-g1",
                "rds-ca-ecc384-g1",
                "rds-ca-rsa4096-g1"
            ]
        }
    ]
}
```


DB server certificate validities

The validity of DB server certificate depends on the DB engine and DB engine version. If the DB engine version supports rotating the certificate without restart, the validity of the DB server certificate is 1 year. Otherwise the validity is 3 years.

For more information about DB server certificate rotation, see Automatic server certificate rotation .

Viewing the CA for your DB instance

To view the details about the CA for a DB instance in the console, choose the **Connectivity & security** tab on the details page for the DB instance. For **Connect using**, choose **Endpoints**. The

CA details appear in the **Security** section under **Additional configurations**. This section shows **Certificate authority** and, when available, **Certificate authority date** and **DB instance certificate expiration date**.

For an Aurora DB cluster, you can view the CA details only on the details page for each DB instance, not on the details page for the DB cluster.

If you're using the Amazon CLI, you can view the details about the CA for a DB instance by using the describe-db-instances command.

Download certificate bundles for Aurora

When you connect to your database with SSL or TLS, the database instance requires a trust certificate from Amazon RDS. Select the appropriate link in the following table to download the bundle that corresponds with the Amazon Web Services Region where you host your database.

Certificate bundles for specific Amazon Web Services Regions

To get a certificate bundle for the China (Beijing) Amazon Region or China (Ningxia) Amazon Region, download it from https://rds-truststore.s3.cn-north-1.amazonaws.com.cn/global/global-bundle.pem. If your application is on Microsoft Windows and requires a PKCS7 file, you can download the PKCS7 certificate bundle from https://rds-truststore.s3.cn-north-1.amazonaws.com.cn/global/global-bundle.p7b.

The bundle contains the `rds-ca-rsa2048-g1`,`rds-ca-rsa4096-g1`, and `rds-ca-ecc384-g1` root CA certificates. Your application trust store only needs to register the root CA certificate.

To get a certificate bundle, download from the link for the Amazon Region in the following table.

Amazon Region	Certificate bundle (PEM)	Certificate bundle (PKCS7)
China (Beijing)	cn-north-1-bundle.pem	cn-north-1-bundle.p7b
China (Ningxia)	cn-northwest-1-bundle.pem	cn-northwest-1-bundle.p7b

Viewing the contents of your CA certificate

To check the contents of your CA certificate bundle, use the following command:

```
keytool -printcert -v -file global-bundle.pem
```

Rotating your SSL/TLS certificate

Amazon RDS Certificate Authority certificates rds-ca-2019 expired in August, 2024. If you use or plan to use Secure Sockets Layer (SSL) or Transport Layer Security (TLS) with certificate verification to connect to your RDS DB instances , consider using the new CA certificate rds-ca-rsa2048-g1. If you currently do not use SSL/TLS with certificate verification, you might still have an expired CA certificate and must update them to a new CA certificate if you plan to use SSL/TLS with certificate verification to connect to your RDS databases.

Amazon RDS provides new CA certificates as an Amazon security best practice. For information about the new certificates and the supported Amazon Regions, see Using SSL/TLS to encrypt a connection to a DB cluster .

To update the CA certificate for your database, use the following methods:

- Updating your CA certificate by modifying your DB instance
- Updating your CA certificate by applying maintenance

Before you update your DB instances to use the new CA certificate, make sure that you update your clients or applications connecting to your RDS databases.

Considerations for rotating certificates

Consider the following situations before rotating your certificate:

- Amazon RDS Proxy uses certificates from the Amazon Certificate Manager (ACM). If you're using RDS Proxy, when you rotate your SSL/TLS certificate, you don't need to update applications that use RDS Proxy connections. For more information, see Using TLS/SSL with RDS Proxy .
- If you're using a Go version 1.15 application with a DB instance that was created or updated to the rds-ca-2019 certificate prior to July 28, 2020, you must update the certificate again. Update the certificate to rds-ca-rsa2048-g1.

  Use the `modify-db-instance` command , using the new CA certificate identifier. You can find the CAs that are available for a specific DB engine and DB engine version using the `describe-db-engine-versions` command.

  If you created your database or updated its certificate after July 28, 2020, no action is required. For more information, see Go GitHub issue #39568.

Updating your CA certificate by modifying your DB instance

The following example updates your CA certificate from *rds-ca-2019* to *rds-ca-rsa2048-g1*.

Update your application trust store to reduce any down time associated with updating your CA certificate. For more information about restarts associated with CA certificate rotation, see Automatic server certificate rotation .

To update your CA certificate by modifying your DB instance

1. Download the new SSL/TLS certificate as described in Using SSL/TLS to encrypt a connection to a DB cluster .
2. Update your applications to use the new SSL/TLS certificate.

   The methods for updating applications for new SSL/TLS certificates depend on your specific applications. Work with your application developers to update the SSL/TLS certificates for your applications.

   For information about checking for SSL/TLS connections and updating applications for each DB engine, see the following topics:

   - Updating applications to connect to Aurora MySQL DB clusters using new TLS certificates
   - Updating applications to connect to Aurora PostgreSQL DB clusters using new SSL/TLS certificates

   For a sample script that updates a trust store for a Linux operating system, see Sample script for importing certificates into your trust store .

   > **Note**
   >
   > The certificate bundle contains certificates for both the old and new CA, so you can upgrade your application safely and maintain connectivity during the transition period. If you are using the Amazon Database Migration Service to migrate a database to a DB cluster, we recommend using the certificate bundle to ensure connectivity during the migration.

3. Modify the DB instance to change the CA from **rds-ca-2019** to **rds-ca-rsa2048-g1**. To check if your database requires a restart to update the CA certificates, use the describe-db-engine-versions command and check the `SupportsCertificateRotationWithoutRestart` flag.


> **Note**
>
> Reboot your Babelfish cluster after modifying to update the CA certificate.

> **Important**
>
> If you are experiencing connectivity issues after certificate expiry, use the apply immediately option by specifying **Apply immediately** in the console or by specifying the `--apply-immediately` option using the Amazon CLI. By default, this operation is scheduled to run during your next maintenance window.
> To set an override for your cluster CA that's different from the default RDS CA, use the modify-certificates CLI command.


You can use the Amazon Web Services Management Console or the Amazon CLI to change the CA certificate from **rds-ca-2019** to **rds-ca-rsa2048-g1** for a DB instance .

Console

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**, and then choose the DB instance that you want to modify.
3. Choose **Modify**.

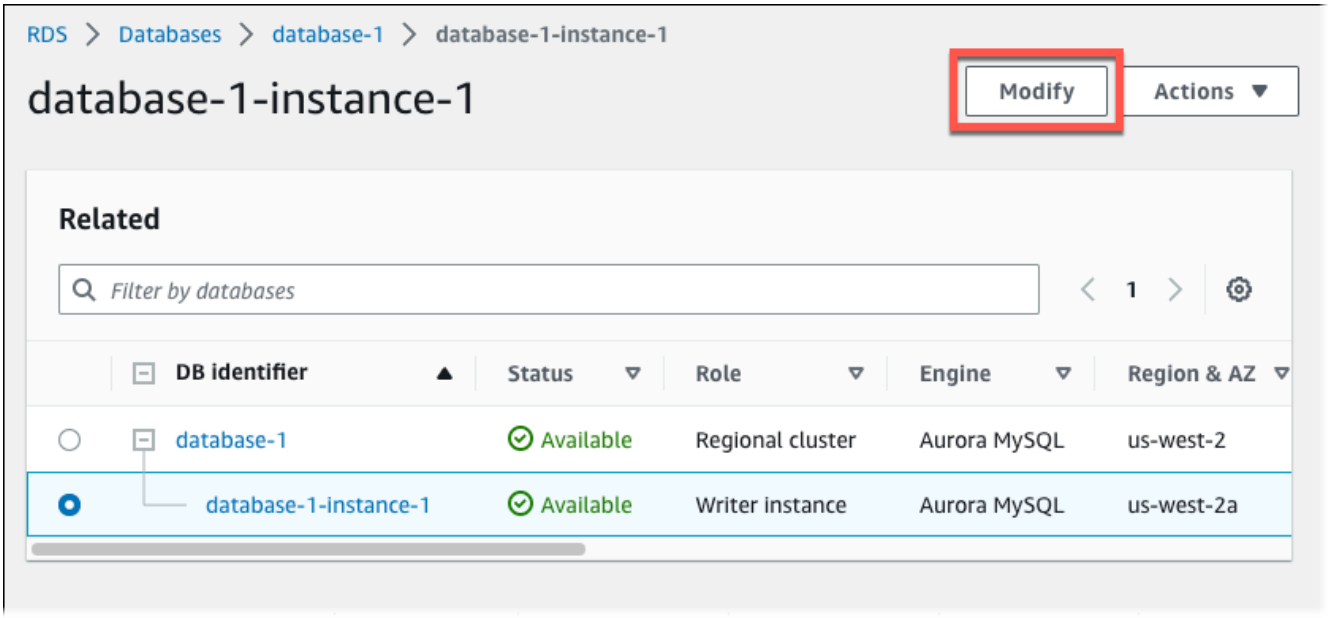

4. In the **Connectivity** section, choose **rds-ca-rsa2048-g1**.

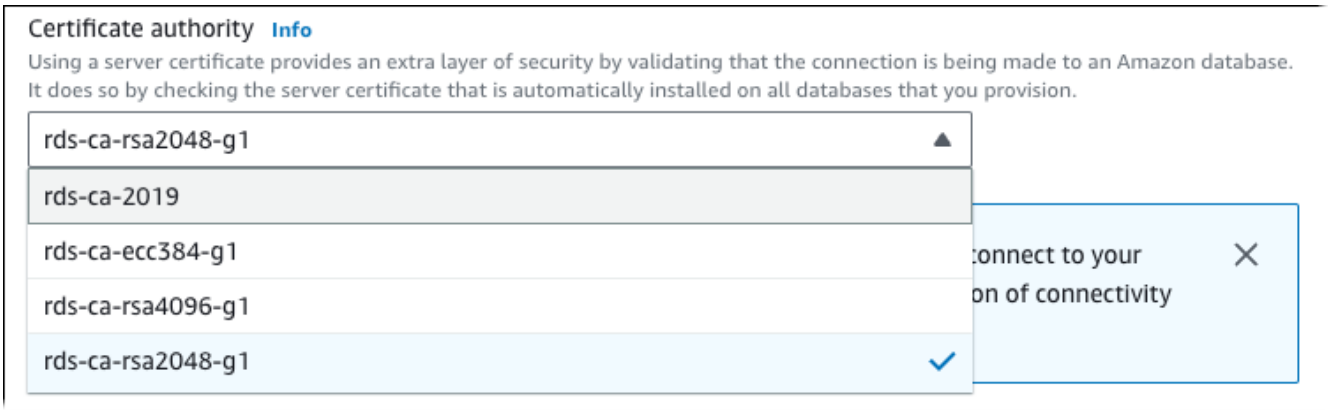

5. Choose **Continue** and check the summary of modifications.
6. To apply the changes immediately, choose **Apply immediately**.
7. On the confirmation page, review your changes. If they are correct, choose **Modify DB Instance** to save your changes.

> **Important**
>
> When you schedule this operation, make sure that you have updated your client-side trust store beforehand.

Or choose **Back** to edit your changes or **Cancel** to cancel your changes.

Amazon CLI

To use the Amazon CLI to change the CA from **rds-ca-2019** to **rds-ca-rsa2048-g1** for a DB instance , call the modify-db-instance or modify-db-cluster command. Specify the DB instance identifier and the `--ca-certificate-identifier` option.

Use the `--apply-immediately` parameter to apply the update immediately. By default, this operation is scheduled to run during your next maintenance window.

> **Important**
>
> When you schedule this operation, make sure that you have updated your client-side trust store beforehand.

Example

The following example modifies `mydbinstance` by setting the CA certificate to `rds-ca-rsa2048-g1`.

For Linux, macOS, or Unix:

```
aws rds modify-db-instance \
    --db-instance-identifier mydbinstance \
    --ca-certificate-identifier rds-ca-rsa2048-g1
```

For Windows:

```
aws rds modify-db-instance ^
    --db-instance-identifier mydbinstance ^
    --ca-certificate-identifier rds-ca-rsa2048-g1
```

> **Note**
>
> If your instance requires reboot, you can use the modify-db-instance CLI command and specify the `--no-certificate-rotation-restart` option.


Updating your CA certificate by applying maintenance

Perform the following steps to update your CA certificate by applying maintenance.


Console

To update your CA certificate by applying maintenance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Certificate update**.

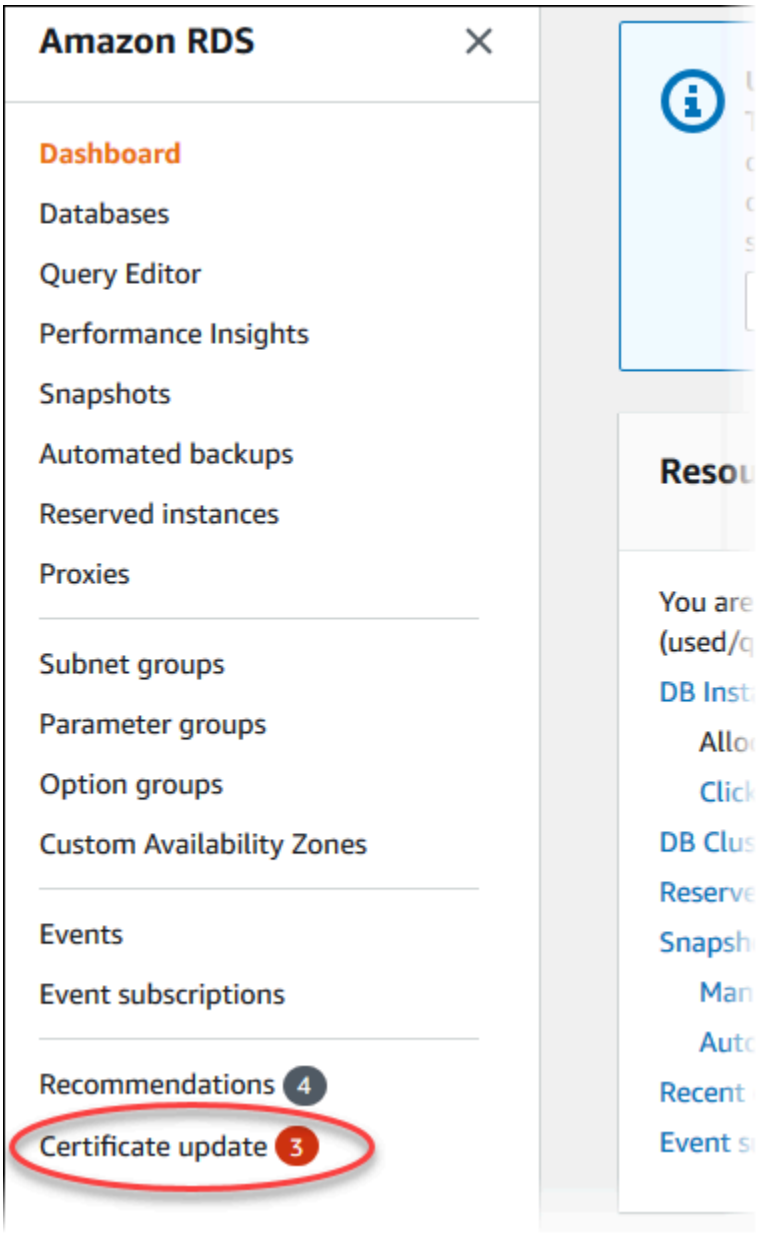

The **Databases requiring certificate update** page appears.

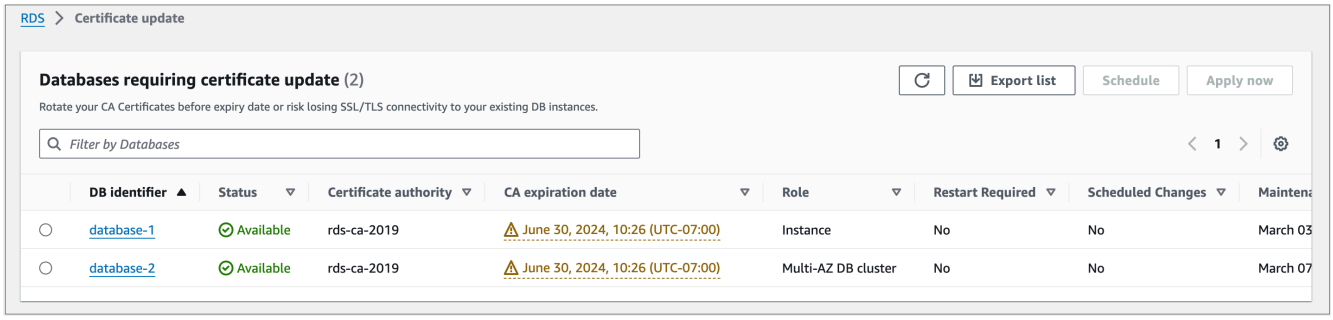


> **Note**
>
> This page only shows the DB instances for the current Amazon Web Services Region. If you have databases in more than one Amazon Web Services Region, check this page in each Amazon Web Services Region to see all DB instances with old SSL/TLS certificates.

3. Choose the DB instance that you want to update.


   You can schedule the certificate rotation for your next maintenance window by choosing **Schedule**. Apply the rotation immediately by choosing **Apply now**.

> **Important**
>
> If you experience connectivity issues after certificate expiry, use the **Apply now** option.

4. a. If you choose **Schedule**, you are prompted to confirm the CA certificate rotation. This prompt also states the scheduled window for your update.

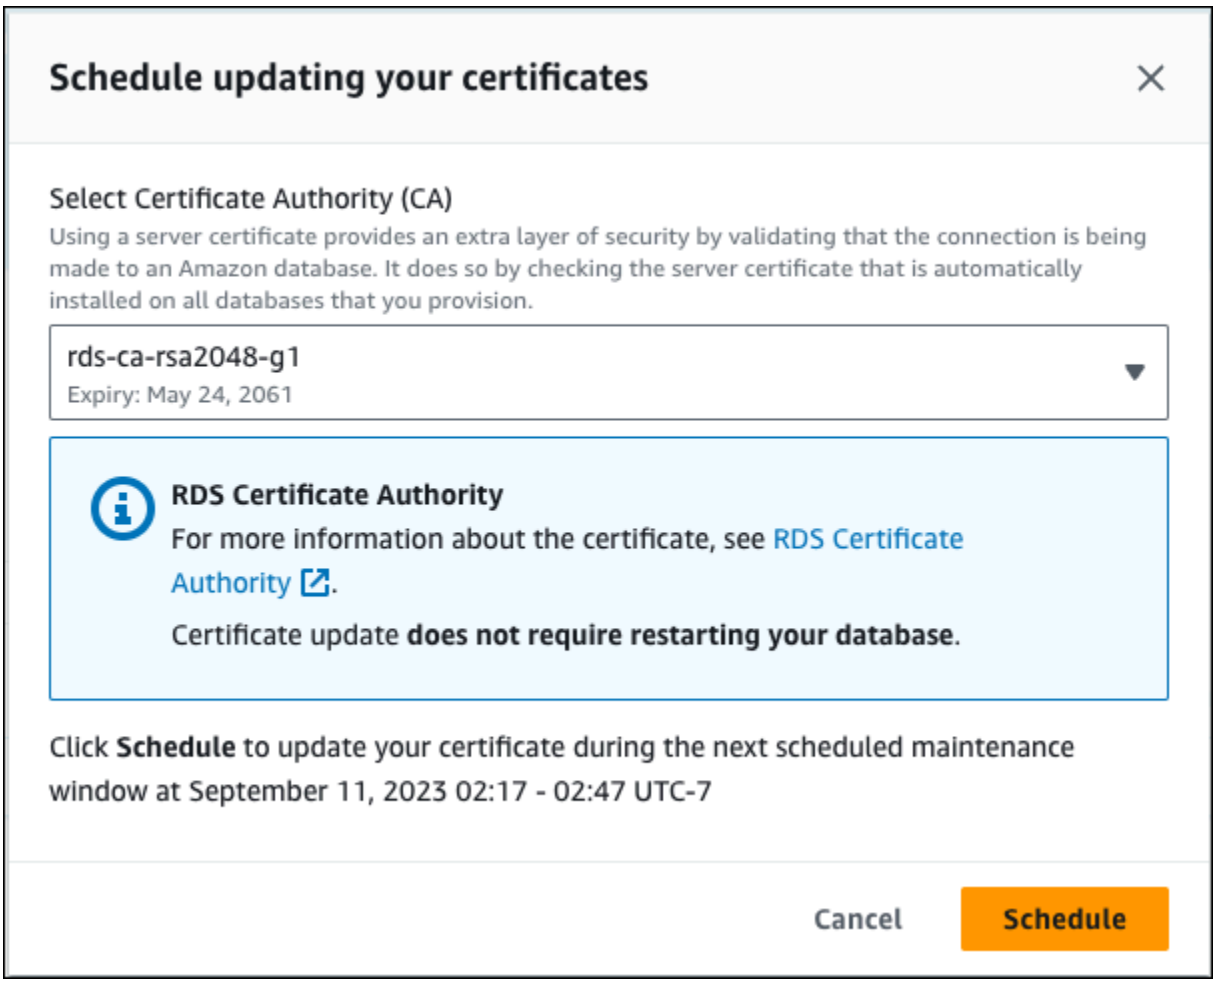

b. If you choose **Apply now**, you are prompted to confirm the CA certificate rotation.

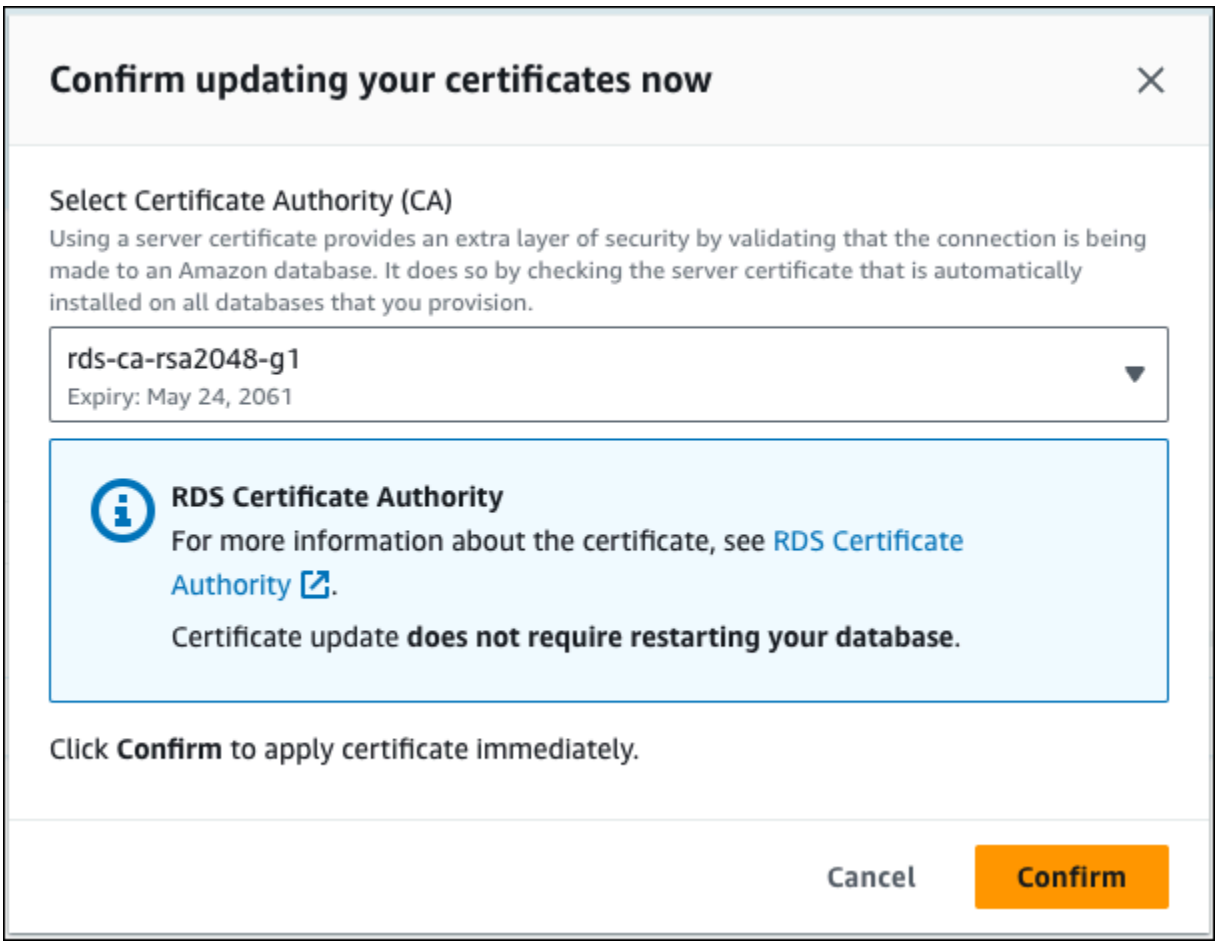

> **Important**
>
> Before scheduling the CA certificate rotation on your database, update any client applications that use SSL/TLS and the server certificate to connect. These updates are specific to your DB engine. After you have updated these client applications, you can confirm the CA certificate rotation.

To continue, choose the check box, and then choose **Confirm**.

5. Repeat steps 3 and 4 for each DB instance that you want to update.

Automatic server certificate rotation

If your root CA supports automatic server certificate rotation, RDS automatically handles the rotation of the DB server certificate. RDS uses the same root CA for this automatic rotation, so you don't need to download a new CA bundle. See Certificate authorities .

The rotation and validity of your DB server certificate depend on your DB engine:

- If your DB engine supports rotation without restart, RDS automatically rotates the DB server certificate without requiring any action from you. RDS attempts to rotate your DB server certificate in your preferred maintenance window at the DB server certificate half life. The new DB server certificate is valid for 12 months.
- If your DB engine doesn't support rotation without restart, Amazon RDS makes a `server-certificate-rotation` Pending Maintenance Action visible via Describe-pending-maintenance-actions API, at the half life of the certificate, or at least 3 months before expiry. You can apply the rotation using the apply-pending-maintenance-action API. The new DB server certificate is valid for 36 months.

Use the describe-db-engine-versions command and inspect the `SupportsCertificateRotationWithoutRestart` flag to identify whether the DB engine version supports rotating the certificate without restart. For more information, see Setting the CA for your database .

> **Important**
>
> For Amazon RDS for Oracle DB instances, you will see the `SupportsCertificateRotationWithoutRestart` flag of the DB engine versions marked as FALSE. However, Amazon RDS for Oracle DB instances do NOT require restart, but the database listener is restarted during the server certificate rotation. Existing database connections are unaffected, but new connections will encounter errors for a brief period while the listener is restarted. If you want to manually rotate the server certificate, use the apply-pending-maintenance-action Amazon CLI command.

Sample script for importing certificates into your trust store

The following are sample shell scripts that import the certificate bundle into a trust store.

Each sample shell script uses keytool, which is part of the Java Development Kit (JDK). For information about installing the JDK, see JDK Installation Guide.

Linux

The following is a sample shell script that imports the certificate bundle into a trust store on a Linux operating system.

```
mydir=tmp/certs
if [ ! -e "${mydir}" ]
then
mkdir -p "${mydir}"
fi truststore=${mydir}/rds-truststore.jks storepassword=changeit

curl -sS "https://rds-truststore.s3.cn-north-1.amazonaws.com.cn/global/global-
bundle.pem"> ${mydir}/global-bundle.pem
awk 'split_after == 1 {n++;split_after=0} /-----END CERTIFICATE-----/
 {split_after=1}{print > "rds-ca-" n+1 ".pem"}' < ${mydir}/global-bundle.pem

for CERT in rds-ca-*; do alias=$(openssl x509 -noout -text -in $CERT | perl -ne
 'next unless /Subject:/; s/.*(CN=|CN = )//; print')
  echo "Importing $alias"
  keytool -import -file ${CERT} -alias "${alias}" -storepass ${storepassword} -
keystore ${truststore} -noprompt
  rm $CERT
done

rm ${mydir}/global-bundle.pem

echo "Trust store content is: "

keytool -list -v -keystore "$truststore" -storepass ${storepassword} | grep Alias |
 cut -d " " -f3- | while read alias
do expiry=`keytool -list -v -keystore "$truststore" -storepass ${storepassword} -
alias "${alias}" | grep Valid | perl -ne 'if(/until: (.*?)\n/) { print "$1\n"; }'`
   echo " Certificate ${alias} expires in '$expiry'"
done
```

macOS

The following is a sample shell script that imports the certificate bundle into a trust store on macOS.

```
mydir=tmp/certs
if [ ! -e "${mydir}" ]
then
mkdir -p "${mydir}"
fi truststore=${mydir}/rds-truststore.jks storepassword=changeit

curl -sS "https://rds-truststore.s3.cn-north-1.amazonaws.com.cn/global/global-
bundle.pem"> ${mydir}/global-bundle.pem
split -p "-----BEGIN CERTIFICATE-----" ${mydir}/global-bundle.pem rds-ca-

for CERT in rds-ca-*; do alias=$(openssl x509 -noout -text -in $CERT | perl -ne
 'next unless /Subject:/; s/.*(CN=|CN = )//; print')
  echo "Importing $alias"
  keytool -import -file ${CERT} -alias "${alias}" -storepass ${storepassword} -
keystore ${truststore} -noprompt
  rm $CERT
done

rm ${mydir}/global-bundle.pem

echo "Trust store content is: "

keytool -list -v -keystore "$truststore" -storepass ${storepassword} | grep Alias |
 cut -d " " -f3- | while read alias
do expiry=`keytool -list -v -keystore "$truststore" -storepass ${storepassword} -
alias "${alias}" | grep Valid | perl -ne 'if(/until: (.*?)\n/) { print "$1\n"; }'`
   echo " Certificate ${alias} expires in '$expiry'"
done
```

To learn more best practices about using SSL with Amazon RDS, see Best practices for successful SSL connections to Amazon RDS for Oracle .

Internetwork traffic privacy

Connections are protected both between Amazon Aurora and on-premises applications and between Amazon Aurora and other Amazon resources within the same Amazon Region.

Traffic between service and on-premises clients and applications

You have two connectivity options between your private network and Amazon:

- An Amazon Site-to-Site VPN connection. For more information, see What is Amazon Site-to-Site VPN?
- An Amazon Direct Connect connection. For more information, see What is Amazon Direct Connect?

You get access to Amazon Aurora through the network by using Amazon-published API operations. Clients must support the following:

- Transport Layer Security (TLS). We require TLS 1.2 and recommend TLS 1.3.
- Cipher suites with perfect forward secrecy (PFS) such as DHE (Ephemeral Diffie-Hellman) or ECDHE (Elliptic Curve Ephemeral Diffie-Hellman). Most modern systems such as Java 7 and later support these modes.

Additionally, requests must be signed by using an access key ID and a secret access key that is associated with an IAM principal. Or you can use the Amazon Security Token Service (Amazon STS) to generate temporary security credentials to sign requests.

Identity and access management for Amazon Aurora

Amazon Identity and Access Management (IAM) is an Amazon Web Services service that helps an administrator securely control access to Amazon resources. IAM administrators control who can be *authenticated* (signed in) and *authorized* (have permissions) to use Amazon RDS resources. IAM is an Amazon Web Services service that you can use with no additional charge.

For information about updates to the Amazon managed policies for Amazon Aurora, see Amazon RDS updates to Amazon managed policies.

Topics

- Audience
- Authenticating with identities
- Managing access using policies
- How Amazon Aurora works with IAM
- Identity-based policy examples for Amazon Aurora
- Amazon managed policies for Amazon RDS
- Amazon RDS updates to Amazon managed policies
- Preventing cross-service confused deputy problems
- IAM database authentication
- Troubleshooting Amazon Aurora identity and access

Audience

How you use Amazon Identity and Access Management (IAM) differs, depending on the work you do in Amazon Aurora.

Service user – If you use the Aurora service to do your job, then your administrator provides you with the credentials and permissions that you need. As you use more Aurora features to do your work, you might need additional permissions. Understanding how access is managed can help you request the right permissions from your administrator. If you cannot access a feature in Aurora, see Troubleshooting Amazon Aurora identity and access.

Service administrator – If you're in charge of Aurora resources at your company, you probably have full access to Aurora. It's your job to determine which Aurora features and resources your

employees should access. You must then submit requests to your administrator to change the permissions of your service users. Review the information on this page to understand the basic concepts of IAM. To learn more about how your company can use IAM with Aurora, see How Amazon Aurora works with IAM.

Administrator – If you're an administrator, you might want to learn details about how you can write policies to manage access to Aurora. To view example Aurora identity-based policies that you can use in IAM, see Identity-based policy examples for Amazon Aurora.

Authenticating with identities

Authentication is how you sign in to Amazon using your identity credentials. You must be authenticated as the Amazon Web Services account root user, an IAM user, or by assuming an IAM role.

For programmatic access, Amazon provides an SDK and CLI to cryptographically sign requests. For more information, see Amazon Signature Version 4 for API requests in the *IAM User Guide*.

Amazon account root user

When you create an Amazon Web Services account, you begin with one sign-in identity called the Amazon Web Services account *root user* that has complete access to all Amazon Web Services services and resources. We strongly recommend that you don't use the root user for everyday tasks. For tasks that require root user credentials, see Tasks that require root user credentials in the *IAM User Guide*.

Federated identity

As a best practice, require human users to use federation with an identity provider to access Amazon Web Services services using temporary credentials.

A *federated identity* is a user from your enterprise directory, web identity provider, or Amazon Directory Service that accesses Amazon Web Services services using credentials from an identity source. Federated identities assume roles that provide temporary credentials.

IAM users and groups

An *IAM user* is an identity with specific permissions for a single person or application. We recommend using temporary credentials instead of IAM users with long-term credentials. For more

information, see Require human users to use federation with an identity provider to access Amazon using temporary credentials in the *IAM User Guide*.

An *IAM group* specifies a collection of IAM users and makes permissions easier to manage for large sets of users. For more information, see Use cases for IAM users in the *IAM User Guide*.

You can authenticate to your DB cluster using IAM database authentication.

IAM database authentication works with Aurora. For more information about authenticating to your DB cluster using IAM, see IAM database authentication .

IAM roles

An *IAM role* is an identity within your Amazon Web Services account that has specific permissions. It is similar to a user, but is not associated with a specific person. You can temporarily assume an IAM role in the Amazon Web Services Management Console by switching roles. You can assume a role by calling an Amazon CLI or Amazon API operation or by using a custom URL. For more information about methods for using roles, see Using IAM roles in the *IAM User Guide*.

IAM roles with temporary credentials are useful in the following situations:

- **Temporary user permissions** – A user can assume an IAM role to temporarily take on different permissions for a specific task.
- **Federated user access** – To assign permissions to a federated identity, you create a role and define permissions for the role. When a federated identity authenticates, the identity is associated with the role and is granted the permissions that are defined by the role. For information about roles for federation, see Create a role for a third-party identity provider (federation) in the *IAM User Guide*.
- **Cross-account access** – You can use an IAM role to allow someone (a trusted principal) in a different account to access resources in your account. Roles are the primary way to grant cross-account access. However, with some Amazon Web Services services, you can attach a policy directly to a resource (instead of using a role as a proxy). To learn the difference between roles and resource-based policies for cross-account access, see How IAM roles differ from resource-based policies in the *IAM User Guide*.
- **Cross-service access** – Some Amazon Web Services services use features in other Amazon Web Services services. For example, when you make a call in a service, it's common for that service to run applications in Amazon EC2 or store objects in Amazon S3. A service might do this using the calling principal's permissions, using a service role, or using a service-linked role.

- **Forward access sessions** – Forward access sessions (FAS) use the permissions of the principal calling an Amazon Web Services service, combined with the requesting Amazon Web Services service to make requests to downstream services. For policy details when making FAS requests, see Forward access sessions.
- **Service role** – A service role is an IAM role that a service assumes to perform actions on your behalf. An IAM administrator can create, modify, and delete a service role from within IAM. For more information, see Create a role to delegate permissions to an Amazon Web Services service in the *IAM User Guide*.
- **Service-linked role** – A service-linked role is a type of service role that is linked to an Amazon Web Services service. The service can assume the role to perform an action on your behalf. Service-linked roles appear in your Amazon Web Services account and are owned by the service. An IAM administrator can view, but not edit the permissions for service-linked roles.

- **Applications running on Amazon EC2** – You can use an IAM role to manage temporary credentials for applications that are running on an EC2 instance and making Amazon CLI or Amazon API requests. This is preferable to storing access keys within the EC2 instance. To assign an Amazon role to an EC2 instance and make it available to all of its applications, you create an instance profile that is attached to the instance. An instance profile contains the role and enables programs that are running on the EC2 instance to get temporary credentials. For more information, see Use an IAM role to grant permissions to applications running on Amazon EC2 instances in the *IAM User Guide*.

To learn whether to use IAM roles, see When to create an IAM role (instead of a user) in the *IAM User Guide*.

Managing access using policies

You control access in Amazon by creating policies and attaching them to IAM identities or Amazon resources. A policy is an object in Amazon that, when associated with an identity or resource, defines their permissions. Amazon evaluates these policies when an entity (root user, user, or IAM role) makes a request. Permissions in the policies determine whether the request is allowed or denied. Most policies are stored in Amazon as JSON documents. For more information about the structure and contents of JSON policy documents, see Overview of JSON policies in the *IAM User Guide*.

An administrator can use policies to specify who has access to Amazon resources, and what actions they can perform on those resources. Every IAM entity (permission set or role) starts with no

permissions. In other words, by default, users can do nothing, not even change their own password. To give a user permission to do something, an administrator must attach a permissions policy to a user. Or the administrator can add the user to a group that has the intended permissions. When an administrator gives permissions to a group, all users in that group are granted those permissions.

IAM policies define permissions for an action regardless of the method that you use to perform the operation. For example, suppose that you have a policy that allows the `iam:GetRole` action. A user with that policy can get role information from the Amazon Web Services Management Console, the Amazon CLI, or the Amazon API.

Identity-based policies

Identity-based policies are JSON permissions policy documents that you can attach to an identity, such as a permission set or role. These policies control what actions that identity can perform, on which resources, and under what conditions. To learn how to create an identity-based policy, see Creating IAM policies in the *IAM User Guide*.

Identity-based policies can be further categorized as *inline policies* or *managed policies*. Inline policies are embedded directly into a single permission set or role. Managed policies are standalone policies that you can attach to multiple permission sets and roles in your Amazon account. Managed policies include Amazon managed policies and customer managed policies. To learn how to choose between a managed policy or an inline policy, see Choosing between managed policies and inline policies in the *IAM User Guide*.

For information about Amazon managed policies that are specific to Amazon Aurora, see Amazon managed policies for Amazon RDS.

Other policy types

Amazon supports additional, less-common policy types. These policy types can set the maximum permissions granted to you by the more common policy types.

- **Permissions boundaries** – A permissions boundary is an advanced feature in which you set the maximum permissions that an identity-based policy can grant to an IAM entity (permission set or role). You can set a permissions boundary for an entity. The resulting permissions are the intersection of entity's identity-based policies and its permissions boundaries. Resource-based policies that specify the permission set or role in the `Principal` field are not limited by the permissions boundary. An explicit deny in any of these policies overrides the allow. For more information about permissions boundaries, see Permissions boundaries for IAM entities in the *IAM User Guide*.

- **Service control policies (SCPs)** – SCPs are JSON policies that specify the maximum permissions for an organization or organizational unit (OU) in Amazon Organizations. Amazon Organizations is a service for grouping and centrally managing multiple Amazon accounts that your business owns. If you enable all features in an organization, then you can apply service control policies (SCPs) to any or all of your accounts. The SCP limits permissions for entities in member accounts, including each Amazon Web Services account root user. For more information about Organizations and SCPs, see How SCPs work in the *Amazon Organizations User Guide*.
- **Session policies** – Session policies are advanced policies that you pass as a parameter when you programmatically create a temporary session for a role or federated user. The resulting session's permissions are the intersection of the permission sets or role's identity-based policies and the session policies. Permissions can also come from a resource-based policy. An explicit deny in any of these policies overrides the allow. For more information, see Session policies in the *IAM User Guide*.

Multiple policy types

When multiple types of policies apply to a request, the resulting permissions are more complicated to understand. To learn how Amazon determines whether to allow a request when multiple policy types are involved, see Policy evaluation logic in the *IAM User Guide*.

How Amazon Aurora works with IAM

Before you use IAM to manage access to Amazon Aurora, you should understand what IAM features are available to use with Aurora.

The following table lists IAM features you can use with Amazon Aurora:

IAM feature	Amazon Aurora support
Identity-based policies	Yes
Resource-based policies	No
Policy actions	Yes
Policy resources	Yes
Policy condition keys (service-specific)	Yes

IAM feature	Amazon Aurora support
ACLs	No
Attribute-based access control (ABAC) (tags in policies)	Yes
Temporary credentials	Yes
Forward access sessions	Yes
Service roles	Yes
Service-linked roles	Yes

To get a high-level view of how Amazon Aurora and other Amazon services work with IAM, see Amazon services that work with IAM in the *IAM User Guide*.

Topics

- Aurora identity-based policies
- Resource-based policies within Aurora
- Policy actions for Aurora
- Policy resources for Aurora
- Policy condition keys for Aurora
- Access control lists (ACLs) in Aurora
- Attribute-based access control (ABAC) in policies with Aurora tags
- Using temporary credentials with Aurora
- Forward access sessions for Aurora
- Service roles for Aurora
- Service-linked roles for Aurora

Aurora identity-based policies

Supports identity-based policies: Yes.

Identity-based policies are JSON permissions policy documents that you can attach to an identity, such as an IAM user, group of users, or role. These policies control what actions users and roles can perform, on which resources, and under what conditions. To learn how to create an identity-based policy, see Define custom IAM permissions with customer managed policies in the *IAM User Guide*.

With IAM identity-based policies, you can specify allowed or denied actions and resources as well as the conditions under which actions are allowed or denied. To learn about all of the elements that you can use in a JSON policy, see IAM JSON policy elements reference in the *IAM User Guide*.

Identity-based policy examples for Aurora

To view examples of Aurora identity-based policies, see Identity-based policy examples for Amazon Aurora.

Resource-based policies within Aurora

Supports resource-based policies: No.

Resource-based policies are JSON policy documents that you attach to a resource. Examples of resource-based policies are IAM *role trust policies* and Amazon S3 *bucket policies*. In services that support resource-based policies, service administrators can use them to control access to a specific resource. For the resource where the policy is attached, the policy defines what actions a specified principal can perform on that resource and under what conditions. You must specify a principal in a resource-based policy. Principals can include accounts, users, roles, federated users, or Amazon Web Services services.

To enable cross-account access, you can specify an entire account or IAM entities in another account as the principal in a resource-based policy. For more information, see Cross account resource access in IAM in the *IAM User Guide*.

Policy actions for Aurora

Supports policy actions: Yes.

Administrators can use Amazon JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The `Action` element of a JSON policy describes the actions that you can use to allow or deny access in a policy. Include actions in a policy to grant permissions to perform the associated operation.

Policy actions in Aurora use the following prefix before the action: `rds:`. For example, to grant someone permission to describe DB instances with the Amazon RDS `DescribeDBInstances` API operation, you include the `rds:DescribeDBInstances` action in their policy. Policy statements must include either an `Action` or `NotAction` element. Aurora defines its own set of actions that describe tasks that you can perform with this service.

To specify multiple actions in a single statement, separate them with commas as follows.

```
"Action": [
      "rds:action1",
      "rds:action2"
```

You can specify multiple actions using wildcards (*). For example, to specify all actions that begin with the word `Describe`, include the following action.

```
"Action": "rds:Describe*"
```

To see a list of Aurora actions, see Actions Defined by Amazon RDS in the *Service Authorization Reference*.

Policy resources for Aurora

Supports policy resources: Yes.

Administrators can use Amazon JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The `Resource` JSON policy element specifies the object or objects to which the action applies. As a best practice, specify a resource using its Amazon Resource Name (ARN). For actions that don't support resource-level permissions, use a wildcard (*) to indicate that the statement applies to all resources.

```
"Resource": "*"
```

The DB instance resource has the following Amazon Resource Name (ARN).

```
arn:${Partition}:rds:${Region}:${Account}:{ResourceType}/${Resource}
```

For more information about the format of ARNs, see Amazon Resource Names (ARNs) and Amazon service namespaces.

For example, to specify the `dbtest` DB instance in your statement, use the following ARN.

```
"Resource": "arn:aws-cn:rds:us-west-2:123456789012:db:dbtest"
```

To specify all DB instances that belong to a specific account, use the wildcard (*).

```
"Resource": "arn:aws-cn:rds:us-east-1:123456789012:db:*"
```

Some RDS API operations, such as those for creating resources, can't be performed on a specific resource. In those cases, use the wildcard (*).

```
"Resource": "*"
```

Many Amazon RDS API operations involve multiple resources. For example, `CreateDBInstance` creates a DB instance. You can specify that an user must use a specific security group and parameter group when creating a DB instance. To specify multiple resources in a single statement, separate the ARNs with commas.

```
"Resource": [
      "resource1",
      "resource2"
```

To see a list of Aurora resource types and their ARNs, see Resources Defined by Amazon RDS in the *Service Authorization Reference*. To learn with which actions you can specify the ARN of each resource, see Actions Defined by Amazon RDS.

Policy condition keys for Aurora

Supports service-specific policy condition keys: Yes.

Administrators can use Amazon JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The `Condition` element specifies when statements execute based on defined criteria. You can create conditional expressions that use condition operators, such as equals or less than, to match

the condition in the policy with values in the request. To see all Amazon global condition keys, see Amazon global condition context keys in the *IAM User Guide*.

Aurora defines its own set of condition keys and also supports using some global condition keys. To see all Amazon global condition keys, see Amazon global condition context keys in the *IAM User Guide*.

All RDS API operations support the `aws:RequestedRegion` condition key.

To see a list of Aurora condition keys, see Condition Keys for Amazon RDS in the *Service Authorization Reference*. To learn with which actions and resources you can use a condition key, see Actions Defined by Amazon RDS.

Access control lists (ACLs) in Aurora

Supports access control lists (ACLs): No

Access control lists (ACLs) control which principals (account members, users, or roles) have permissions to access a resource. ACLs are similar to resource-based policies, although they do not use the JSON policy document format.

Attribute-based access control (ABAC) in policies with Aurora tags

Supports attribute-based access control (ABAC) tags in policies: Yes

Attribute-based access control (ABAC) is an authorization strategy that defines permissions based on attributes called tags. You can attach tags to IAM entities and Amazon resources, then design ABAC policies to allow operations when the principal's tag matches the tag on the resource.

To control access based on tags, you provide tag information in the condition element of a policy using the `aws:ResourceTag/`*`key-name`*, `aws:RequestTag/`*`key-name`*, or `aws:TagKeys` condition keys.

If a service supports all three condition keys for every resource type, then the value is **Yes** for the service. If a service supports all three condition keys for only some resource types, then the value is **Partial**.

For more information about ABAC, see Define permissions with ABAC authorization in the *IAM User Guide*. To view a tutorial with steps for setting up ABAC, see Use attribute-based access control (ABAC) in the *IAM User Guide*.

For more information about tagging Aurora resources, see Specifying conditions: Using custom tags. To view an example identity-based policy for limiting access to a resource based on the tags on that resource, see Grant permission for actions on a resource with a specific tag with two different values.

Using temporary credentials with Aurora

Supports temporary credentials: Yes.

Temporary credentials provide short-term access to Amazon resources and are automatically created when you use federation or switch roles. Amazon recommends that you dynamically generate temporary credentials instead of using long-term access keys. For more information, see Temporary security credentials in IAM and Amazon Web Services services that work with IAM in the *IAM User Guide*.

Forward access sessions for Aurora

Supports forward access sessions: Yes.

Forward access sessions (FAS) use the permissions of the principal calling an Amazon Web Services service, combined with the requesting Amazon Web Services service to make requests to downstream services. For policy details when making FAS requests, see Forward access sessions.

Service roles for Aurora

Supports service roles: Yes.

A service role is an IAM role that a service assumes to perform actions on your behalf. An IAM administrator can create, modify, and delete a service role from within IAM. For more information, see Create a role to delegate permissions to an Amazon Web Services service in the *IAM User Guide*.

> **Warning**
>
> Changing the permissions for a service role might break Aurora functionality. Edit service roles only when Aurora provides guidance to do so.

Service-linked roles for Aurora

Supports service-linked roles: Yes.

A service-linked role is a type of service role that is linked to an Amazon Web Services service. The service can assume the role to perform an action on your behalf. Service-linked roles appear in your Amazon Web Services account and are owned by the service. An IAM administrator can view, but not edit the permissions for service-linked roles.

For details about using Aurora service-linked roles, see Using service-linked roles for Amazon Aurora.

Identity-based policy examples for Amazon Aurora

By default, permission sets and roles don't have permission to create or modify Aurora resources. They also can't perform tasks using the Amazon Web Services Management Console, Amazon CLI, or Amazon API. An administrator must create IAM policies that grant permission sets and roles permission to perform specific API operations on the specified resources they need. The administrator must then attach those policies to the permission sets or roles that require those permissions.

To learn how to create an IAM identity-based policy using these example JSON policy documents, see Creating policies on the JSON tab in the *IAM User Guide*.

Topics

- Policy best practices
- Using the Aurora console
- Permissions required to use the console
- Allow users to view their own permissions
- Permission policies to create, modify and, delete resources in Aurora
- Example policies: Using condition keys
- Specifying conditions: Using custom tags
- Grant permission to tag Aurora resources during creation

Policy best practices

Identity-based policies determine whether someone can create, access, or delete Amazon RDS resources in your account. These actions can incur costs for your Amazon Web Services account. When you create or edit identity-based policies, follow these guidelines and recommendations:

- **Get started with Amazon managed policies and move toward least-privilege permissions** – To get started granting permissions to your users and workloads, use the *Amazon managed policies* that grant permissions for many common use cases. They are available in your Amazon Web Services account. We recommend that you reduce permissions further by defining Amazon customer managed policies that are specific to your use cases. For more information, see Amazon managed policies or Amazon managed policies for job functions in the *IAM User Guide*.
- **Apply least-privilege permissions** – When you set permissions with IAM policies, grant only the permissions required to perform a task. You do this by defining the actions that can be taken on specific resources under specific conditions, also known as *least-privilege permissions*. For more information about using IAM to apply permissions, see Policies and permissions in IAM in the *IAM User Guide*.
- **Use conditions in IAM policies to further restrict access** – You can add a condition to your policies to limit access to actions and resources. For example, you can write a policy condition to specify that all requests must be sent using SSL. You can also use conditions to grant access to service actions if they are used through a specific Amazon Web Services service, such as Amazon CloudFormation. For more information, see IAM JSON policy elements: Condition in the *IAM User Guide*.
- **Use IAM Access Analyzer to validate your IAM policies to ensure secure and functional permissions** – IAM Access Analyzer validates new and existing policies so that the policies adhere to the IAM policy language (JSON) and IAM best practices. IAM Access Analyzer provides more than 100 policy checks and actionable recommendations to help you author secure and functional policies. For more information, see Validate policies with IAM Access Analyzer in the *IAM User Guide*.
- **Require multi-factor authentication (MFA)** – If you have a scenario that requires IAM users or a root user in your Amazon Web Services account, turn on MFA for additional security. To require MFA when API operations are called, add MFA conditions to your policies. For more information, see Secure API access with MFA in the *IAM User Guide*.

For more information about best practices in IAM, see Security best practices in IAM in the *IAM User Guide*.

Using the Aurora console

To access the Amazon Aurora console, you must have a minimum set of permissions. These permissions must allow you to list and view details about the Amazon Aurora resources in your Amazon Web Services account. If you create an identity-based policy that is more restrictive than

the minimum required permissions, the console won't function as intended for entities (users or roles) with that policy.

You don't need to allow minimum console permissions for users that are making calls only to the Amazon CLI or the Amazon API. Instead, allow access to only the actions that match the API operation that you're trying to perform.

To ensure that those entities can still use the Aurora console, also attach the following Amazon managed policy to the entities.

```
AmazonRDSReadOnlyAccess
```

For more information, see Adding permissions to a user in the *IAM User Guide*.

Permissions required to use the console

For a user to work with the console, that user must have a minimum set of permissions. These permissions allow the user to describe the Amazon Aurora resources for their Amazon account and to provide other related information, including Amazon EC2 security and network information.

If you create an IAM policy that is more restrictive than the minimum required permissions, the console doesn't function as intended for users with that IAM policy. To ensure that those users can still use the console, also attach the `AmazonRDSReadOnlyAccess` managed policy to the user, as described in Managing access using policies.

You don't need to allow minimum console permissions for users that are making calls only to the Amazon CLI or the Amazon RDS API.

The following policy grants full access to all Amazon Aurora resources for the root Amazon account:

```
AmazonRDSFullAccess
```

Allow users to view their own permissions

This example shows how you might create a policy that allows IAM users to view the inline and managed policies that are attached to their user identity. This policy includes permissions to complete this action on the console or programmatically using the Amazon CLI or Amazon API.

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "ViewOwnUserInfo",
            "Effect": "Allow",
            "Action": [
                "iam:GetUserPolicy",
                "iam:ListGroupsForUser",
                "iam:ListAttachedUserPolicies",
                "iam:ListUserPolicies",
                "iam:GetUser"
            ],
            "Resource": ["arn:aws-cn:iam::*:user/${aws:username}"]
        },
        {
            "Sid": "NavigateInConsole",
            "Effect": "Allow",
            "Action": [
                "iam:GetGroupPolicy",
                "iam:GetPolicyVersion",
                "iam:GetPolicy",
                "iam:ListAttachedGroupPolicies",
                "iam:ListGroupPolicies",
                "iam:ListPolicyVersions",
                "iam:ListPolicies",
                "iam:ListUsers"
            ],
            "Resource": "*"
        }
    ]
}
```

Permission policies to create, modify and, delete resources in Aurora

The following sections present examples of permission policies that grant and restrict access to resources:

Allow a user to create DB instances in an Amazon account

The following is an example policy that allows the account with the ID `123456789012` to create DB instances for your Amazon account. The policy requires that the name of the new DB instance begin with `test`. The new DB instance must also use the MySQL database engine and the

db.t2.micro DB instance class. In addition, the new DB instance must use an option group and a DB parameter group that starts with default, and it must use the default subnet group.

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
      {
         "Sid": "AllowCreateDBInstanceOnly",
         "Effect": "Allow",
         "Action": [
            "rds:CreateDBInstance"
         ],
         "Resource": [
            "arn:aws-cn:rds:*:123456789012:db:test*",
            "arn:aws-cn:rds:*:123456789012:og:default*",
            "arn:aws-cn:rds:*:123456789012:pg:default*",
            "arn:aws-cn:rds:*:123456789012:subgrp:default"
         ],
         "Condition": {
            "StringEquals": {
               "rds:DatabaseEngine": "mysql",
               "rds:DatabaseClass": "db.t2.micro"
            }
         }
      }
   ]
}
```

The policy includes a single statement that specifies the following permissions for the user:

- The policy allows the account to create a DB instance using the CreateDBInstance API operation (this also applies to the create-db-instance Amazon CLI command and the Amazon Web Services Management Console).
- The Resource element specifies that the user can perform actions on or with resources. You specify resources using an Amazon Resources Name (ARN). This ARN includes the name of the service that the resource belongs to (rds), the Amazon Region (* indicates any region in this example), the Amazon account number (123456789012 is the account number in this example),

and the type of resource. For more information about creating ARNs, see Amazon Resource Names (ARNs) in Amazon RDS.

The `Resource` element in the example specifies the following policy constraints on resources for the user:

- The DB instance identifier for the new DB instance must begin with `test` (for example, `testCustomerData1`, `test-region2-data`).
- The option group for the new DB instance must begin with `default`.
- The DB parameter group for the new DB instance must begin with `default`.
- The subnet group for the new DB instance must be the `default` subnet group.

- The `Condition` element specifies that the DB engine must be MySQL and the DB instance class must be `db.t2.micro`. The `Condition` element specifies the conditions when a policy should take effect. You can add additional permissions or restrictions by using the `Condition` element. For more information about specifying conditions, see Policy condition keys for Aurora. This example specifies the `rds:DatabaseEngine` and `rds:DatabaseClass` conditions. For information about the valid condition values for `rds:DatabaseEngine`, see the list under the `Engine` parameter in CreateDBInstance. For information about the valid condition values for `rds:DatabaseClass`, see Supported DB engines for DB instance classes.

The policy doesn't specify the `Principal` element because in an identity-based policy you don't specify the principal who gets the permission. When you attach policy to a user, the user is the implicit principal. When you attach a permission policy to an IAM role, the principal identified in the role's trust policy gets the permissions.

To see a list of Aurora actions, see Actions Defined by Amazon RDS in the *Service Authorization Reference*.

Allow a user to perform any describe action on any RDS resource

The following permissions policy grants permissions to a user to run all of the actions that begin with `Describe`. These actions show information about an RDS resource, such as a DB instance. The wildcard character (*) in the `Resource` element indicates that the actions are allowed for all Amazon Aurora resources owned by the account.

JSON

```
{
```

```
   "Version":"2012-10-17",
   "Statement": [
      {
         "Sid": "AllowRDSDescribe",
         "Effect": "Allow",
         "Action": "rds:Describe*",
         "Resource": "*"
      }
   ]
}
```

Allow a user to create a DB instance that uses the specified DB parameter group and subnet group

The following permissions policy grants permissions to allow a user to only create a DB instance that must use the `mydbpg` DB parameter group and the `mydbsubnetgroup` DB subnet group.

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
      {
         "Sid": "VisualEditor0",
         "Effect": "Allow",
         "Action": "rds:CreateDBInstance",
         "Resource": [
            "arn:aws-cn:rds:*:*:pg:mydbpg",
            "arn:aws-cn:rds:*:*:subgrp:mydbsubnetgroup"
         ]
      }
   ]
}
```

Grant permission for actions on a resource with a specific tag with two different values

You can use conditions in your identity-based policy to control access to Aurora resources based on tags. The following policy allows permission to perform the `CreateDBSnapshot` API operation on DB instances with either the `stage` tag set to `development` or `test`.

JSON

```
{
   "Version":"2012-10-17",
   "Statement":[
      {
         "Sid":"AllowAnySnapshotName",
         "Effect":"Allow",
         "Action":[
            "rds:CreateDBSnapshot"
         ],
         "Resource":"arn:aws-cn:rds:*:123456789012:snapshot:*"
      },
      {
         "Sid":"AllowDevTestToCreateSnapshot",
         "Effect":"Allow",
         "Action":[
            "rds:CreateDBSnapshot"
         ],
         "Resource":"arn:aws-cn:rds:*:123456789012:db:*",
         "Condition":{
            "StringEquals":{
                "rds:db-tag/stage":[
                  "development",
                  "test"
               ]
            }
         }
      }
   ]
}
```

The following policy allows permission to perform the `ModifyDBInstance` API operation on DB instances with either the `stage` tag set to `development` or `test`.

JSON

```
{
   "Version":"2012-10-17",
   "Statement":[
```

```
      {
         "Sid":"AllowChangingParameterOptionSecurityGroups",
         "Effect":"Allow",
         "Action":[
            "rds:ModifyDBInstance"
         ],
         "Resource": [
            "arn:aws-cn:rds:*:123456789012:pg:*",
            "arn:aws-cn:rds:*:123456789012:secgrp:*",
            "arn:aws-cn:rds:*:123456789012:og:*"
         ]
      },
      {
         "Sid":"AllowDevTestToModifyInstance",
         "Effect":"Allow",
         "Action":[
            "rds:ModifyDBInstance"
         ],
         "Resource":"arn:aws-cn:rds:*:123456789012:db:*",
         "Condition":{
            "StringEquals":{
                "rds:db-tag/stage":[
                  "development",
                  "test"
               ]
            }
         }
      }
   ]
}
```

Prevent a user from deleting a DB instance

The following permissions policy grants permissions to prevent a user from deleting a specific DB instance. For example, you might want to deny the ability to delete your production DB instances to any user that is not an administrator.

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
      {
         "Sid": "DenyDelete1",
         "Effect": "Deny",
         "Action": "rds:DeleteDBInstance",
         "Resource": "arn:aws-cn:rds:us-west-2:123456789012:db:my-mysql-instance"
      }
   ]
}
```

Deny all access to a resource

You can explicitly deny access to a resource. Deny policies take precedence over allow policies. The following policy explicitly denies a user the ability to manage a resource:

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
      {
         "Effect": "Deny",
         "Action": "rds:*",
         "Resource": "arn:aws-cn:rds:us-east-1:123456789012:db:mydb"
      }
   ]
}
```

Example policies: Using condition keys

Following are examples of how you can use condition keys in Amazon Aurora IAM permissions policies.

Example 1: Grant permission to create a DB instance that uses a specific DB engine and isn't MultiAZ

The following policy uses an RDS condition key and allows a user to create only DB instances that use the MySQL database engine and don't use MultiAZ. The `Condition` element indicates the requirement that the database engine is MySQL.

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
      {
         "Sid": "AllowMySQLCreate",
         "Effect": "Allow",
         "Action": "rds:CreateDBInstance",
         "Resource": "*",
         "Condition": {
            "StringEquals": {
               "rds:DatabaseEngine": "mysql"
            },
            "Bool": {
               "rds:MultiAz": false
            }
         }
      }
   ]
}
```

Example 2: Explicitly deny permission to create DB instances for certain DB instance classes and create DB instances that use Provisioned IOPS

The following policy explicitly denies permission to create DB instances that use the DB instance classes `r3.8xlarge` and `m4.10xlarge`, which are the largest and most expensive DB instance classes. This policy also prevents users from creating DB instances that use Provisioned IOPS, which incurs an additional cost.

Explicitly denying permission supersedes any other permissions granted. This ensures that identities to not accidentally get permission that you never want to grant.

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
      {
         "Sid": "DenyLargeCreate",
         "Effect": "Deny",
         "Action": "rds:CreateDBInstance",
         "Resource": "*",
         "Condition": {
            "StringEquals": {
               "rds:DatabaseClass": [
                  "db.r3.8xlarge",
                  "db.m4.10xlarge"
               ]
            }
         }
      },
      {
         "Sid": "DenyPIOPSCreate",
         "Effect": "Deny",
         "Action": "rds:CreateDBInstance",
         "Resource": "*",
         "Condition": {
            "NumericNotEquals": {
               "rds:Piops": "0"
            }
         }
      }
   ]
}
```

Example 3: Limit the set of tag keys and values that can be used to tag a resource

The following policy uses an RDS condition key and allows the addition of a tag with the key `stage` to be added to a resource with the values `test`, qa, and `production`.

JSON

```
{
  "Version":"2012-10-17",
  "Statement": [
    {
      "Sid": "AllowTagEdits",
      "Effect": "Allow",
      "Action": [
        "rds:AddTagsToResource",
        "rds:RemoveTagsFromResource"
      ],
      "Resource": "arn:aws-cn:rds:us-east-1:123456789012:db:db-123456",
      "Condition": {
        "StringEquals": {
          "rds:req-tag/stage": [
            "test",
            "qa",
            "production"
          ]
        }
      }
    }
  ]
}
```

Specifying conditions: Using custom tags

Amazon Aurora supports specifying conditions in an IAM policy using custom tags.

For example, suppose that you add a tag named `environment` to your DB instances with values such as `beta`, `staging`, `production`, and so on. If you do, you can create a policy that restricts certain users to DB instances based on the `environment` tag value.

> **Note**
>
> Custom tag identifiers are case-sensitive.

The following table lists the RDS tag identifiers that you can use in a `Condition` element.

RDS tag identifier	Applies to
`db-tag`	DB instances, including read replicas
`snapshot-tag`	DB snapshots
`ri-tag`	Reserved DB instances
`og-tag`	DB option groups
`pg-tag`	DB parameter groups
`subgrp-tag`	DB subnet groups
`es-tag`	Event subscriptions
`cluster-tag`	DB clusters
`cluster-pg-tag`	DB cluster parameter groups
`cluster-snapshot-tag`	DB cluster snapshots

The syntax for a custom tag condition is as follows:

```
"Condition":{"StringEquals":{"rds:rds-tag-identifier/tag-name":
["value"]} }
```

For example, the following `Condition` element applies to DB instances with a tag named `environment` and a tag value of `production`.

```
"Condition":{"StringEquals":{"rds:db-tag/environment": ["production"]} }
```

For information about creating tags, see Tagging Amazon Aurora andAmazon RDS resources.

Important

If you manage access to your RDS resources using tagging, we recommend that you secure access to the tags for your RDS resources. You can manage access to tags by creating policies for the `AddTagsToResource` and `RemoveTagsFromResource` actions.

For example, the following policy denies users the ability to add or remove tags for all resources. You can then create policies to allow specific users to add or remove tags.

JSON

```
{
   "Version":"2012-10-17",
   "Statement":[
      {
         "Sid":"DenyTagUpdates",
         "Effect":"Deny",
         "Action":[
            "rds:AddTagsToResource",
            "rds:RemoveTagsFromResource"
         ],
         "Resource":"*"
      }
   ]
}
```

To see a list of Aurora actions, see Actions Defined by Amazon RDS in the *Service Authorization Reference*.

Example policies: Using custom tags

Following are examples of how you can use custom tags in Amazon Aurora IAM permissions policies. For more information about adding tags to an Amazon Aurora resource, see Amazon Resource Names (ARNs) in Amazon RDS.

Note

All examples use the us-west-2 region and contain fictitious account IDs.

Example 1: Grant permission for actions on a resource with a specific tag with two different values

The following policy allows permission to perform the `CreateDBSnapshot` API operation on DB instances with either the `stage` tag set to `development` or `test`.

JSON

```
{
   "Version":"2012-10-17",
   "Statement":[
      {
         "Sid":"AllowAnySnapshotName",
         "Effect":"Allow",
         "Action":[
            "rds:CreateDBSnapshot"
         ],
         "Resource":"arn:aws-cn:rds:*:123456789012:snapshot:*"
      },
      {
         "Sid":"AllowDevTestToCreateSnapshot",
         "Effect":"Allow",
         "Action":[
            "rds:CreateDBSnapshot"
         ],
         "Resource":"arn:aws-cn:rds:*:123456789012:db:*",
         "Condition":{
            "StringEquals":{
                "rds:db-tag/stage":[
                  "development",
                  "test"
               ]
            }
         }
      }
   ]
}
```

The following policy allows permission to perform the `ModifyDBInstance` API operation on DB instances with either the `stage` tag set to `development` or `test`.

JSON

```
{
   "Version":"2012-10-17",
   "Statement":[
```

```
      {
         "Sid":"AllowChangingParameterOptionSecurityGroups",
         "Effect":"Allow",
         "Action":[
            "rds:ModifyDBInstance"
            ],
          "Resource": [
            "arn:aws-cn:rds:*:123456789012:pg:*",
            "arn:aws-cn:rds:*:123456789012:secgrp:*",
            "arn:aws-cn:rds:*:123456789012:og:*"
            ]
       },
       {
         "Sid":"AllowDevTestToModifyInstance",
         "Effect":"Allow",
         "Action":[
            "rds:ModifyDBInstance"
            ],
         "Resource":"arn:aws-cn:rds:*:123456789012:db:*",
         "Condition":{
            "StringEquals":{
               "rds:db-tag/stage":[
                  "development",
                  "test"
                  ]
               }
            }
       }
    ]
}
```

Example 2: Explicitly deny permission to create a DB instance that uses specified DB parameter groups

The following policy explicitly denies permission to create a DB instance that uses DB parameter groups with specific tag values. You might apply this policy if you require that a specific customer-created DB parameter group always be used when creating DB instances. Policies that use `Deny` are most often used to restrict access that was granted by a broader policy.

Explicitly denying permission supersedes any other permissions granted. This ensures that identities to not accidentally get permission that you never want to grant.

JSON

```
{
   "Version":"2012-10-17",
   "Statement":[
      {
         "Sid":"DenyProductionCreate",
         "Effect":"Deny",
         "Action":"rds:CreateDBInstance",
         "Resource":"arn:aws-cn:rds:*:123456789012:pg:*",
         "Condition":{
            "StringEquals":{
               "rds:pg-tag/usage":"prod"
            }
         }
      }
   ]
}
```

Example 3: Grant permission for actions on a DB instance with an instance name that is prefixed with a user name

The following policy allows permission to call any API (except to `AddTagsToResource` or `RemoveTagsFromResource`) on a DB instance that has a DB instance name that is prefixed with the user's name and that has a tag called `stage` equal to `devo` or that has no tag called `stage`.

The `Resource` line in the policy identifies a resource by its Amazon Resource Name (ARN). For more information about using ARNs with Amazon Aurora resources, see Amazon Resource Names (ARNs) in Amazon RDS.

JSON

```
{
   "Version":"2012-10-17",
   "Statement":[
      {
         "Sid":"AllowFullDevAccessNoTags",
         "Effect":"Allow",
         "NotAction":[
            "rds:AddTagsToResource",
```

```
            "rds:RemoveTagsFromResource"
         ],
         "Resource":"arn:aws-cn:rds:*:123456789012:db:${aws:username}*",
         "Condition":{
            "StringEqualsIfExists":{
               "rds:db-tag/stage":"devo"
            }
         }
      }
   ]
}
```

Grant permission to tag Aurora resources during creation

Some RDS API operations allow you to specify tags when you create the resource. You can use resource tags to implement attribute-based control (ABAC). For more information, see What is ABAC for Amazon? and Controlling access to Amazon resources using tags.

To enable users to tag resources on creation, they must have permissions to use the action that creates the resource, such as `rds:CreateDBCluster`. If tags are specified in the create action, RDS performs additional authorization on the `rds:AddTagsToResource` action to verify if users have permissions to create tags. Therefore, users must also have explicit permissions to use the `rds:AddTagsToResource` action.

In the IAM policy definition for the `rds:AddTagsToResource` action, you can use the `aws:RequestTag` condition key to require tags in a request to tag a resource.

For example, the following policy allows users to create DB instances and apply tags during DB instance creation, but only with specific tag keys (`environment` or `project`):

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
       {
           "Effect": "Allow",
           "Action": [
               "rds:CreateDBInstance"
           ],
```

```
            "Resource": "*"
        },
        {
            "Effect": "Allow",
            "Action": [
                "rds:AddTagsToResource"
            ],
            "Resource": "*",
            "Condition": {
                "StringEquals": {
                    "aws:RequestTag/environment": ["production", "development"],
                    "aws:RequestTag/project": ["dataanalytics", "webapp"]
                },
                "ForAllValues:StringEquals": {
                    "aws:TagKeys": ["environment", "project"]
                }
            }
        }
    ]
}
```

This policy denies any create DB instance request that includes tags other than the `environment` or `project` tags, or that doesn't specify either of these tags. Additionally, users must specify values for the tags that match the allowed values in the policy.

The following policy allows users to create DB clusters and apply any tags during creation except the `environment=prod` tag:

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
       {
           "Effect": "Allow",
           "Action": [
               "rds:CreateDBCluster"
           ],
           "Resource": "*"
       },
       {
```

```
            "Effect": "Allow",
            "Action": [
                "rds:AddTagsToResource"
            ],
            "Resource": "*",
            "Condition": {
                "StringNotEquals": {
                    "aws:RequestTag/environment": "prod"
                }
            }
        }
    ]
}
```

Supported RDS API actions for tagging on creation

The following RDS API actions support tagging when you create a resource. For these actions, you can specify tags when you create the resource:

- `CreateBlueGreenDeployment`
- `CreateCustomDBEngineVersion`
- `CreateDBCluster`
- `CreateDBClusterEndpoint`
- `CreateDBClusterParameterGroup`
- `CreateDBClusterSnapshot`
- `CreateDBInstance`
- `CreateDBInstanceReadReplica`
- `CreateDBParameterGroup`
- `CreateDBProxy`
- `CreateDBProxyEndpoint`
- `CreateDBSecurityGroup`
- `CreateDBShardGroup`
- `CreateDBSnapshot`
- `CreateDBSubnetGroup`
- `CreateEventSubscription`

- CreateGlobalCluster
- CreateIntegration
- CreateOptionGroup
- CreateTenantDatabase
- CopyDBClusterParameterGroup
- CopyDBClusterSnapshot
- CopyDBParameterGroup
- CopyDBSnapshot
- CopyOptionGroup
- RestoreDBClusterFromS3
- RestoreDBClusterFromSnapshot
- RestoreDBClusterToPointInTime
- RestoreDBInstanceFromDBSnapshot
- RestoreDBInstanceFromS3
- RestoreDBInstanceToPointInTime
- PurchaseReservedDBInstancesOffering

If you use the Amazon CLI or API to create a resource with tags, the Tags parameter is used to apply tags to resources during creation.

For these API actions, if tagging fails, the resource is not created, and the request fails with an error. This ensures that resources are either created with tags or not created at all, preventing resources from being created without the intended tags.

Amazon managed policies for Amazon RDS

To add permissions to permission sets and roles, it's easier to use Amazon managed policies than to write policies yourself. It takes time and expertise to create IAM customer managed policies that provide your team with only the permissions they need. To get started quickly, you can use our Amazon managed policies. These policies cover common use cases and are available in your Amazon Web Services account. For more information about Amazon managed policies, see Amazon managed policies in the *IAM User Guide*.

Amazon Web Services services maintain and update Amazon managed policies. You can't change the permissions in Amazon managed policies. Services occasionally add additional permissions to an Amazon managed policy to support new features. This type of update affects all identities (permission sets and roles) where the policy is attached. Services are most likely to update an Amazon managed policy when a new feature is launched or when new operations become available. Services don't remove permissions from an Amazon managed policy, so policy updates don't break your existing permissions.

Additionally, Amazon supports managed policies for job functions that span multiple services. For example, the `ReadOnlyAccess` Amazon managed policy provides read-only access to all Amazon Web Services services and resources. When a service launches a new feature, Amazon adds read-only permissions for new operations and resources. For a list and descriptions of job function policies, see Amazon managed policies for job functions in the *IAM User Guide*.

Topics

- Amazon managed policy: AmazonRDSReadOnlyAccess
- Amazon managed policy: AmazonRDSFullAccess
- Amazon managed policy: AmazonRDSDataFullAccess
- Amazon managed policy: AmazonRDSEnhancedMonitoringRole
- Amazon managed policy: AmazonRDSPerformanceInsightsReadOnly
- Amazon managed policy: AmazonRDSPerformanceInsightsFullAccess
- Amazon managed policy: AmazonRDSDirectoryServiceAccess
- Amazon managed policy: AmazonRDSServiceRolePolicy
- Amazon managed policy: AmazonRDSPreviewServiceRolePolicy
- Amazon managed policy: AmazonRDSBetaServiceRolePolicy

Amazon managed policy: AmazonRDSReadOnlyAccess

This policy allows read-only access to Amazon RDS through the Amazon Web Services Management Console.

Permissions details

This policy includes the following permissions:

- `rds` – Allows principals to describe Amazon RDS resources and list the tags for Amazon RDS resources.
- `cloudwatch` – Allows principals to get Amazon CloudWatch metric statistics.
- `ec2` – Allows principals to describe Availability Zones and networking resources.
- `logs` – Allows principals to describe CloudWatch Logs log streams of log groups, and get CloudWatch Logs log events.
- `devops-guru` – Allows principals to describe resources that have Amazon DevOps Guru coverage, which is specified either by CloudFormation stack names or resource tags.

For more information about this policy, including the JSON policy document, see AmazonRDSReadOnlyAccess in the *Amazon Managed Policy Reference Guide*.

Amazon managed policy: AmazonRDSFullAccess

This policy provides full access to Amazon RDS through the Amazon Web Services Management Console.

Permissions details

This policy includes the following permissions:

- `rds` – Allows principals full access to Amazon RDS.
- `application-autoscaling` – Allows principals describe and manage Application Auto Scaling scaling targets and policies.
- `cloudwatch` – Allows principals get CloudWatch metric statics and manage CloudWatch alarms.
- `ec2` – Allows principals to describe Availability Zones and networking resources.
- `logs` – Allows principals to describe CloudWatch Logs log streams of log groups, and get CloudWatch Logs log events.

- `outposts` – Allows principals to get Amazon Outposts instance types.
- `pi` – Allows principals to get Performance Insights metrics.
- `sns` – Allows principals to Amazon Simple Notification Service (Amazon SNS) subscriptions and topics, and to publish Amazon SNS messages.
- `devops-guru` – Allows principals to describe resources that have Amazon DevOps Guru coverage, which is specified either by CloudFormation stack names or resource tags.

For more information about this policy, including the JSON policy document, see AmazonRDSFullAccess in the *Amazon Managed Policy Reference Guide*.

Amazon managed policy: AmazonRDSDataFullAccess

This policy allows full access to use the Data API and the query editor on Aurora Serverless clusters in a specific Amazon Web Services account. This policy allows the Amazon Web Services account to get the value of a secret from Amazon Secrets Manager.

You can attach the `AmazonRDSDataFullAccess` policy to your IAM identities.

Permissions details

This policy includes the following permissions:

- `dbqms` – Allows principals to access, create, delete, describe, and update queries. The Database Query Metadata Service (`dbqms`) is an internal-only service. It provides your recent and saved queries for the query editor on the Amazon Web Services Management Console for multiple Amazon Web Services services, including Amazon RDS.
- `rds-data` – Allows principals to run SQL statements on Aurora Serverless databases.
- `secretsmanager` – Allows principals to get the value of a secret from Amazon Secrets Manager.

For more information about this policy, including the JSON policy document, see AmazonRDSDataFullAccess in the *Amazon Managed Policy Reference Guide*.

Amazon managed policy: AmazonRDSEnhancedMonitoringRole

This policy provides access to Amazon CloudWatch Logs for Amazon RDS Enhanced Monitoring.

Permissions details

This policy includes the following permissions:

- `logs` – Allows principals to create CloudWatch Logs log groups and retention policies, and to create and describe CloudWatch Logs log streams of log groups. It also allows principals to put and get CloudWatch Logs log events.

For more information about this policy, including the JSON policy document, see AmazonRDSEnhancedMonitoringRole in the *Amazon Managed Policy Reference Guide*.

Amazon managed policy: AmazonRDSPerformanceInsightsReadOnly

This policy provides read-only access to Amazon RDS Performance Insights for Amazon RDS DB instances and Amazon Aurora DB clusters.

This policy now includes `Sid` (statement ID) as an identifier for the policy statement.

Permissions details

This policy includes the following permissions:

- `rds` – Allows principals to describe Amazon RDS DB instances and Amazon Aurora DB clusters.
- `pi` – Allows principals make calls to the Amazon RDS Performance Insights API and access Performance Insights metrics.

For more information about this policy, including the JSON policy document, see AmazonRDSPerformanceInsightsReadOnly in the *Amazon Managed Policy Reference Guide*.

Amazon managed policy: AmazonRDSPerformanceInsightsFullAccess

This policy provides full access to Amazon RDS Performance Insights for Amazon RDS DB instances and Amazon Aurora DB clusters.

This policy now includes `Sid` (statement ID) as an identifier for the policy statement.

Permissions details

This policy includes the following permissions:

- `rds` – Allows principals to describe Amazon RDS DB instances and Amazon Aurora DB clusters.
- `pi` – Allows principals make calls to the Amazon RDS Performance Insights API, and create, view, and delete performance analysis reports.

- `cloudwatch` – Allows principals to list all the Amazon CloudWatch metrics, and get metric data and statistics.

For more information about this policy, including the JSON policy document, see AmazonRDSPerformanceInsightsFullAccess in the *Amazon Managed Policy Reference Guide*.

Amazon managed policy: AmazonRDSDirectoryServiceAccess

This policy allows Amazon RDS to make calls to the Amazon Directory Service.

Permissions details

This policy includes the following permission:

- `ds` – Allows principals to describe Amazon Directory Service directories and control authorization to Amazon Directory Service directories.

For more information about this policy, including the JSON policy document, see AmazonRDSDirectoryServiceAccess in the *Amazon Managed Policy Reference Guide*.

Amazon managed policy: AmazonRDSServiceRolePolicy

You can't attach the `AmazonRDSServiceRolePolicy` policy to your IAM entities. This policy is attached to a service-linked role that allows Amazon RDS to perform actions on your behalf. For more information, see Service-linked role permissions for Amazon Aurora.

Amazon managed policy: AmazonRDSPreviewServiceRolePolicy

You shouldn't attach `AmazonRDSPreviewServiceRolePolicy` to your IAM entities. This policy is attached to a service-linked role that allows Amazon RDS to call Amazon services on behalf of your RDS DB resources. For more information, see Service-linked role for Amazon RDS Preview.

Permissions details

This policy includes the following permissions:

- `ec2` - Allows principals to describe Availability Zones and networking resources.
- `secretsmanager` – Allows principals to get the value of a secret from Amazon Secrets Manager.
- `cloudwatch`, `logs` - Allows Amazon RDS to upload DB instance metrics and logs to CloudWatch through CloudWatch agent.

For more information about this policy, including the JSON policy document, see AmazonRDSPreviewServiceRolePolicy in the *Amazon Managed Policy Reference Guide*.

Amazon managed policy: AmazonRDSBetaServiceRolePolicy

You shouldn't attach `AmazonRDSBetaServiceRolePolicy` to your IAM entities. This policy is attached to a service-linked role that allows Amazon RDS to call Amazon services on behalf of your RDS DB resources. For more information, see Service-linked role permissions for Amazon RDS Beta.

Permissions details

This policy includes the following permissions:

- `ec2` - Allows Amazon RDS to perform backup operations on the DB instance that provides point-in-time restore capabilities.
- `secretsmanager` - Allows Amazon RDS to manage DB instance specific secrets created by Amazon RDS.
- `cloudwatch`, `logs` - Allows Amazon RDS to upload DB instance metrics and logs to CloudWatch through CloudWatch agent.

For more information about this policy, including the JSON policy document, see AmazonRDSBetaServiceRolePolicy in the *Amazon Managed Policy Reference Guide*.

Amazon RDS updates to Amazon managed policies

View details about updates to Amazon managed policies for Amazon RDS since this service began tracking these changes. For automatic alerts about changes to this page, subscribe to the RSS feed on the Amazon RDS Document history page.

Change	Description	Date
Amazon managed policy: AmazonRDSPreviewServiceRolePolicy – Update to existing policy	Amazon RDS removed `sns:Publish` permission from the `AmazonRDSPreviewServiceRolePolicy` of the `AWSServiceRoleForRDSPreview` service-linked role. For more information, see Amazon managed policy: AmazonRDSPreviewServiceRolePolicy.	August 7, 2024
Amazon managed policy: AmazonRDSBetaServiceRolePolicy – Update to existing policy	Amazon RDS removed `sns:Publish` permission from the `AmazonRDSBetaServiceRolePolicy` of the `AWSServiceRoleForRDSBeta` service-linked role. For more information, see Amazon managed policy: AmazonRDSBetaServiceRolePolicy.	August 7, 2024
Amazon managed policy: AmazonRDSServiceRolePolicy – Update to existing policy	Amazon RDS removed `sns:Publish` permission from the `AmazonRDSServiceRolePolicy` of the `AWSServiceRoleForRDS` service-linked role. For more informati	July 2, 2024

Change	Description	Date
	on, see Amazon managed policy: AmazonRDSServiceRolePolicy.	
Amazon managed policies for Amazon RDS – Update to existing policy	Amazon RDS added a new permission to the `AmazonRDSCustomServiceRolePolicy` of the `AWSServiceRoleForRDSCustom` service-linked role to allow RDS Custom for SQL Server to modify the underlying database host instance type. RDS also added the `ec2:DescribeInstanceTypes` permission to get instance type information for database host. For more information, see Amazon managed policies for Amazon RDS.	April 8, 2024
Amazon managed policies for Amazon RDS – New policy	Amazon RDS added a new managed policy named `AmazonRDSCustomInstanceProfileRolePolicy` to allow RDS Custom to perform automation actions and database management tasks through an EC2 instance profile. For more information, see Amazon managed policies for Amazon RDS.	February 27, 2024

Change	Description	Date
Service-linked role permissions for Amazon Aurora – Update to an existing policy	Amazon RDS added new statement IDs to the `AmazonRDSServiceRolePolicy` of the `AWSServiceRoleForRDS` service-linked role. For more information, see Service-linked role permissions for Amazon Aurora.	January 19, 2024
Amazon managed policies for Amazon RDS – Update to existing policies	The `AmazonRDSPerformanceInsightsReadOnly` and `AmazonRDSPerformanceInsightsFullAccess` managed policies now includes `Sid` (statement ID) as an identifier in the policy statement. For more information, see Amazon managed policy: AmazonRDSPerformanceInsightsReadOnly and Amazon managed policy: AmazonRDSPerformanceInsightsFullAccess	October 23, 2023

Change	Description	Date
Amazon managed policies for Amazon RDS – Update to existing policy	Amazon RDS added new permissions to `AmazonRDSFullAccess` managed policy. The permissions allow you to generate, view, and delete the performance analysis report for a time period. For more information about configuring access policies for Performance Insights, see Configuring access policies for Database Insights	August 17, 2023
Amazon managed policies for Amazon RDS – New policy and update to existing policy	Amazon RDS added new permissions to `AmazonRDSPerformanceInsightsReadOnly` managed policy and a new managed policy named `AmazonRDSPerformanceInsightsFullAccess`. These permissions allow you to analyse the Performance Insights for a time period, view the analysis results along with the recommendations, and delete the reports. For more information about configuring access policies for Performance Insights, see Configuring access policies for Database Insights	August 16, 2023

Change	Description	Date
Amazon managed policies for Amazon RDS – Update to an existing policy	Amazon RDS added a new Amazon CloudWatch namespace `ListMetrics` to `AmazonRDSFullAccess` and `AmazonRDSReadOnlyAccess`. This namespace is required for Amazon RDS to list specific resource usage metrics. For more information, see Overview of managing access permissions to your CloudWatch resources in the *Amazon CloudWatch User Guide*.	April 4, 2023

Change	Description	Date
Service-linked role permissions for Amazon Aurora – Update to an existing policy	Amazon RDS added new permissions to the `AmazonRDSServiceRolePolicy` of the `AWSServiceRoleForRDS` service-linked role for integration with Amazon Secrets Manager. RDS requires integration with Secrets Manager for managing master user passwords in Secrets Manager. The secret uses a reserved naming convention and restricts customer updates. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager.	December 22, 2022

Change	Description	Date
Amazon managed policies for Amazon RDS – Update to existing policies	Amazon RDS added a new permission to the `AmazonRDSFullAccess` and `AmazonRDSReadOnlyAccess` managed policies to allow you to turn on Amazon DevOps Guru in the RDS console. This permission is required to check whether DevOps Guru is turned on. For more information, see Configuring IAM access policies for DevOps Guru for RDS.	December 19, 2022
Service-linked role permissions for Amazon Aurora – Update to an existing policy	Amazon RDS added a new Amazon CloudWatch namespace to `AmazonRDSPreviewServiceRolePolicy` for `PutMetricData`. This namespace is required for Amazon RDS to publish resource usage metrics. For more information, see Using condition keys to limit access to CloudWatch namespaces in the *Amazon CloudWatch User Guide*.	June 7, 2022

Change	Description	Date
Service-linked role permissions for Amazon Aurora – Update to an existing policy	Amazon RDS added a new Amazon CloudWatch namespace to `AmazonRDSBetaServiceRolePolicy` for `PutMetricData`. This namespace is required for Amazon RDS to publish resource usage metrics. For more information, see Using condition keys to limit access to CloudWatch namespaces in the *Amazon CloudWatch User Guide*.	June 7, 2022
Service-linked role permissions for Amazon Aurora – Update to an existing policy	Amazon RDS added a new Amazon CloudWatch namespace to `AWSServiceRoleForRDS` for `PutMetricData`. This namespace is required for Amazon RDS to publish resource usage metrics. For more information, see Using condition keys to limit access to CloudWatch namespaces in the *Amazon CloudWatch User Guide*.	April 22, 2022

Change	Description	Date
Amazon managed policies for Amazon RDS – New policy	Amazon RDS added a new managed policy named `AmazonRDSPerformanceInsightsReadOnly` to allow Amazon RDS to call Amazon services on behalf of your DB instances. For more information about configuring access policies for Performance Insights, see Configuring access policies for Database Insights	March 10, 2022
Service-linked role permissions for Amazon Aurora – Update to an existing policy	Amazon RDS added new Amazon CloudWatch namespaces to `AWSServiceRoleForRDS` for `PutMetricData` . These namespaces are required for Amazon DocumentDB (with MongoDB compatibility) and Amazon Neptune to publish CloudWatch metrics. For more information, see Using condition keys to limit access to CloudWatch namespaces in the *Amazon CloudWatch User Guide*.	March 4, 2022
Amazon RDS started tracking changes	Amazon RDS started tracking changes for its Amazon managed policies.	October 26, 2021

Preventing cross-service confused deputy problems

The *confused deputy problem* is a security issue where an entity that doesn't have permission to perform an action can coerce a more-privileged entity to perform the action. In Amazon, cross-service impersonation can result in the confused deputy problem.

Cross-service impersonation can occur when one service (the *calling service*) calls another service (the *called service*). The calling service can be manipulated to use its permissions to act on another customer's resources in a way that it shouldn't have permission to access. To prevent this, Amazon provides tools that can help you protect your data for all services with service principals that have been given access to resources in your account. For more information, see The confused deputy problem in the *IAM User Guide*.

To limit the permissions that Amazon RDS gives another service for a specific resource, we recommend using the `aws:SourceArn` and `aws:SourceAccount` global condition context keys in resource policies.

In some cases, the `aws:SourceArn` value doesn't contain the account ID, for example when you use the Amazon Resource Name (ARN) for an Amazon S3 bucket. In these cases, make sure to use both global condition context keys to limit permissions. In some cases, you use both global condition context keys and the `aws:SourceArn` value contains the account ID. In these cases, make sure that the `aws:SourceAccount` value and the account in the `aws:SourceArn` use the same account ID when they're used in the same policy statement. If you want only one resource to be associated with the cross-service access, use `aws:SourceArn`. If you want to allow any resource in the specified Amazon account to be associated with the cross-service use, use `aws:SourceAccount`.

Make sure that the value of `aws:SourceArn` is an ARN for an Amazon RDS resource type. For more information, see Amazon Resource Names (ARNs) in Amazon RDS.

The most effective way to protect against the confused deputy problem is to use the `aws:SourceArn` global condition context key with the full ARN of the resource. In some cases, you might not know the full ARN of the resource or you might be specifying multiple resources. In these cases, use the `aws:SourceArn` global context condition key with wildcards (`*`) for the unknown portions of the ARN. An example is `arn:aws-cn:rds:*:123456789012:*`.

The following example shows how you can use the `aws:SourceArn` and `aws:SourceAccount` global condition context keys in Amazon RDS to prevent the confused deputy problem.

JSON

```
{
  "Version":"2012-10-17",
  "Statement": {
    "Sid": "ConfusedDeputyPreventionExamplePolicy",
    "Effect": "Allow",
    "Principal": {
      "Service": "rds.amazonaws.com"
    },
    "Action": "sts:AssumeRole",
    "Condition": {
      "ArnLike": {
        "aws:SourceArn": "arn:aws-cn:rds:us-east-1:123456789012:db:mydbinstance"
      },
      "StringEquals": {
        "aws:SourceAccount": "123456789012"
      }
    }
  }
}
```

For more examples of policies that use the `aws:SourceArn` and `aws:SourceAccount` global condition context keys, see the following sections:

- Granting permissions to publish notifications to an Amazon SNS topic
- Setting up access to an Amazon S3 bucket (PostgreSQL import)
- Setting up access to an Amazon S3 bucket (PostgreSQL export)

IAM database authentication

You can authenticate to your DB cluster using Amazon Identity and Access Management (IAM) database authentication. IAM database authentication works with Aurora MySQL, and Aurora PostgreSQL. With this authentication method, you don't need to use a password when you connect to a DB cluster. Instead, you use an authentication token.

An *authentication token* is a unique string of characters that Amazon Aurora generates on request. Authentication tokens are generated using Amazon Signature Version 4. Each token has a lifetime of 15 minutes. You don't need to store user credentials in the database, because authentication is managed externally using IAM. You can also still use standard database authentication. The token is only used for authentication and doesn't affect the session after it is established.

IAM database authentication provides the following benefits:

- Network traffic to and from the database is encrypted using Secure Socket Layer (SSL) or Transport Layer Security (TLS). For more information about using SSL/TLS with Amazon Aurora, see Using SSL/TLS to encrypt a connection to a DB cluster.
- You can use IAM to centrally manage access to your database resources, instead of managing access individually on each DB cluster.
- For applications running on Amazon EC2, you can use profile credentials specific to your EC2 instance to access your database instead of a password, for greater security.

In general, consider using IAM database authentication when you don't want to manage usernames and passwords directly in your application code.

The Amazon Web Services (Amazon) JDBC Driver supports IAM database authentication. For more information, see Amazon IAM Authentication Plugin in the Amazon Web Services (Amazon) JDBC Driver GitHub repository.

The Amazon Web Services (Amazon) Python Driver supports IAM database authentication. For more information, see Amazon IAM Authentication Plugin in the Amazon Web Services (Amazon) Python Driver GitHub repository.

Navigate through the following topics to learn the process to set IAM for DB authentication:

- Enabling and disabling IAM database authentication
- Creating and using an IAM policy for IAM database access

- Creating a database account using IAM authentication
- Connecting to your DB cluster using IAM authentication

Region and version availability

Feature availability and support varies across specific versions of each Aurora database engine, and across Amazon Web Services Regions. For more information on version and Region availability with Aurora and IAM database authentication, see Supported Regions and Aurora DB engines for IAM database authentication.

For Aurora MySQL, all supported DB instance classes support IAM database authentication, except for db.t2.small and db.t3.small. For information about the supported DB instance classes, see Supported DB engines for DB instance classes.

CLI and SDK support

IAM database authentication is available for the Amazon CLI and for the following language-specific Amazon SDKs:

- Amazon SDK for .NET
- Amazon SDK for C++
- Amazon SDK for Go
- Amazon SDK for Java
- Amazon SDK for JavaScript
- Amazon SDK for PHP
- Amazon SDK for Python (Boto3)
- Amazon SDK for Ruby

Limitations for IAM database authentication

When using IAM database authentication, the following limitations apply:

- Currently, IAM database authentication doesn't support all global condition context keys.

  For more information about global condition context keys, see Amazon global condition context keys in the *IAM User Guide*.

- For PostgreSQL, if the IAM role (`rds_iam`) is added to a user (including the RDS master user), IAM authentication takes precedence over password authentication, so the user must log in as an IAM user.
- You cannot use a custom Route 53 DNS record instead of the DB cluster endpoint to generate the authentication token.
- CloudWatch and CloudTrail don't log IAM authentication. These services do not track `generate-db-auth-token` API calls that authorize the IAM role to enable database connection.
- IAM DB authentication requires compute resources on the database cluster. You must have between 300 and 1000 MiB extra memory on your database for reliable connectivity. To see the memory needed for your workload, compare the RES column for RDS processes in the Enhanced Monitoring processlist before and after enabling IAM DB authentication. See Viewing OS metrics in the RDS console.

  If you are using a burstable class instance, avoid running out of memory by reducing the memory used by other parameters like buffers and cache by the same amount.
- For Aurora MySQL, you can't use password based authentication for a database user you configure with IAM authentication.
- IAM DB authentication is not supported for RDS on Outposts for any engine.

Recommendations for IAM database authentication

We recommend the following when using IAM database authentication:

- The size of an IAM database authentication token depends on many things including the number of IAM tags, IAM service policies, ARN lengths, as well as other IAM and database properties. The minimum size of this token is generally about 1 KB but can be larger. Since this token is used as the password in the connection string to the database using IAM authentication, you should ensure that your database driver (for example, ODBC) and/or any tools do not limit or otherwise truncate this token due to its size. A truncated token will cause the authentication validation done by the database and IAM to fail.
- If you are using temporary credentials when creating an IAM database authentication token, the temporary credentials must still be valid when using the IAM database authentication token to make a connection request.

Unsupported Amazon global condition context keys

IAM database authentication does not support the following subset of Amazon global condition context keys.

- `aws:Referer`
- `aws:SourceIp`
- `aws:SourceVpc`
- `aws:SourceVpce`
- `aws:UserAgent`
- `aws:VpcSourceIp`

For more information, see Amazon global condition context keys in the *IAM User Guide*.

Enabling and disabling IAM database authentication

By default, IAM database authentication is disabled on DB clusters. You can enable or disable IAM database authentication using the Amazon Web Services Management Console, Amazon CLI, or the API.

You can enable IAM database authentication when you perform one of the following actions:

- To create a new DB cluster with IAM database authentication enabled, see Creating an Amazon Aurora DB cluster.
- To modify a DB cluster to enable IAM database authentication, see Modifying an Amazon Aurora DB cluster.
- To restore a DB cluster from a snapshot with IAM database authentication enabled, see Restoring from a DB cluster snapshot.
- To restore a DB cluster to a point in time with IAM database authentication enabled, see Restoring a DB cluster to a specified time.

Console

Each creation or modification workflow has a **Database authentication** section, where you can enable or disable IAM database authentication. In that section, choose **Password and IAM database authentication** to enable IAM database authentication.

To enable or disable IAM database authentication for an existing DB cluster

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Databases**.
3. Choose the DB cluster that you want to modify.

   > **Note**
   >
   > You can only enable IAM authentication if all DB instances in the DB cluster are compatible with IAM. Check the compatibility requirements in Region and version availability.

4. Choose **Modify**.
5. In the **Database authentication** section, choose **IAM database authentication** to enable IAM database authentication. Choose **Password authentication** or **Password and Kerberos authentication** to disable IAM authentication.
6. You can also choose to enable publishing IAM DB authentication logs to CloudWatch Logs. Under **Log exports**, choose the **iam-db-auth-error log** option. Publishing your logs to CloudWatch Logs consumes storage and you incur charges for that storage. Be sure to delete any CloudWatch Logs that you no longer need.
7. Choose **Continue**.
8. To apply the changes immediately, choose **Immediately** in the **Scheduling of modifications** section.
9. Choose **Modify cluster**.

Amazon CLI

To create a new DB cluster with IAM authentication by using the Amazon CLI, use the `create-db-cluster` command. Specify the `--enable-iam-database-authentication` option.

To update an existing DB cluster to have or not have IAM authentication, use the Amazon CLI command `modify-db-cluster`. Specify either the `--enable-iam-database-authentication` or `--no-enable-iam-database-authentication` option, as appropriate.

> **Note**
>
> You can only enable IAM authentication if all DB instances in the DB cluster are compatible with IAM. Check the compatibility requirements in Region and version availability.

By default, Aurora performs the modification during the next maintenance window. If you want to override this and enable IAM DB authentication as soon as possible, use the `--apply-immediately` parameter.

If you are restoring a DB cluster, use one of the following Amazon CLI commands:

- `restore-db-cluster-to-point-in-time`
- `restore-db-cluster-from-db-snapshot`

The IAM database authentication setting defaults to that of the source snapshot. To change this setting, set the `--enable-iam-database-authentication` or `--no-enable-iam-database-authentication` option, as appropriate.

RDS API

To create a new DB instance with IAM authentication by using the API, use the API operation `CreateDBCluster`. Set the `EnableIAMDatabaseAuthentication` parameter to `true`.

To update an existing DB cluster to have IAM authentication, use the API operation `ModifyDBCluster`. Set the `EnableIAMDatabaseAuthentication` parameter to `true` to enable IAM authentication, or `false` to disable it.

> **Note**
>
> You can only enable IAM authentication if all DB instances in the DB cluster are compatible with IAM. Check the compatibility requirements in Region and version availability.

If you are restoring a DB cluster, use one of the following API operations:

- `RestoreDBClusterFromSnapshot`
- `RestoreDBClusterToPointInTime`

The IAM database authentication setting defaults to that of the source snapshot. To change this setting, set the `EnableIAMDatabaseAuthentication` parameter to `true` to enable IAM authentication, or `false` to disable it.

Creating and using an IAM policy for IAM database access

To allow a user or role to connect to your DB cluster, you must create an IAM policy. After that, you attach the policy to a permissions set or role.

> **Note**
>
> To learn more about IAM policies, see Identity and access management for Amazon Aurora.

The following example policy allows a user to connect to a DB cluster using IAM database authentication.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "rds-db:connect"
            ],
            "Resource": [
                "arn:aws-cn:rds-db:us-east-2:111122223333:dbuser:cluster-
ABCDEFGHIJKL01234/db_user"
            ]
        }
    ]
}
```

> **Important**
>
> A user with administrator permissions can access DB clusters without explicit permissions in an IAM policy. If you want to restrict administrator access to DB clusters, you can

create an IAM role with the appropriate, lesser privileged permissions and assign it to the administrator.

Note

Don't confuse the `rds-db:` prefix with other RDS API operation prefixes that begin with `rds:`. You use the `rds-db:` prefix and the `rds-db:connect` action only for IAM database authentication. They aren't valid in any other context.

The example policy includes a single statement with the following elements:

- `Effect` – Specify `Allow` to grant access to the DB cluster. If you don't explicitly allow access, then access is denied by default.
- `Action` – Specify `rds-db:connect` to allow connections to the DB cluster.
- `Resource` – Specify an Amazon Resource Name (ARN) that describes one database account in one DB cluster. The ARN format is as follows.

```
arn:aws-cn:rds-db:region:account-id:dbuser:DbClusterResourceId/db-user-name
```

In this format, replace the following:

- *`region`* is the Amazon Region for the DB cluster. In the example policy, the Amazon Region is `us-east-2`.
- *`account-id`* is the Amazon account number for the DB cluster. In the example policy, the account number is `1234567890`. The user must be in the same account as the account for the DB cluster.

  To perform cross-account access, create an IAM role with the policy shown above in the account for the DB cluster and allow your other account to assume the role.
- *`DbClusterResourceId`* is the identifier for the DB cluster. This identifier is unique to an Amazon Region and never changes. In the example policy, the identifier is `cluster-ABCDEFGHIJKL01234`.

To find a DB cluster resource ID in the Amazon Web Services Management Console for Amazon Aurora, choose the DB cluster to see its details. Then choose the **Configuration** tab. The **Resource ID** is shown in the **Configuration** section.

Alternatively, you can use the Amazon CLI command to list the identifiers and resource IDs for all of your DB cluster in the current Amazon Region, as shown following.

```
aws rds describe-db-clusters --query "DBClusters[*].
[DBClusterIdentifier,DbClusterResourceId]"
```

> **Note**
>
> If you are connecting to a database through RDS Proxy, specify the proxy resource ID, such as `prx-ABCDEFGHIJKL01234`. For information about using IAM database authentication with RDS Proxy, see Connecting to a database using IAM authentication.

- *`db-user-name`* is the name of the database account to associate with IAM authentication. In the example policy, the database account is `db_user`.

You can construct other ARNs to support various access patterns. The following policy allows access to two different database accounts in a DB cluster.

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
      {
         "Effect": "Allow",
         "Action": [
             "rds-db:connect"
         ],
         "Resource": [
             "arn:aws-cn:rds-db:us-east-2:123456789012:dbuser:cluster-
ABCDEFGHIJKL01234/jane_doe",
```

```
            "arn:aws-cn:rds-db:us-east-2:123456789012:dbuser:cluster-
ABCDEFGHIJKL01234/mary_roe"
         ]
      }
   ]
}
```

The following policy uses the "*" character to match all DB clusters and database accounts for a particular Amazon account and Amazon Region.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "rds-db:connect"
            ],
            "Resource": [
                "arn:aws-cn:rds-db:us-east-2:111122223333:dbuser:*/*"
            ]
        }
    ]
}
```

The following policy matches all of the DB clusters for a particular Amazon account and Amazon Region. However, the policy only grants access to DB clusters that have a `jane_doe` database account.

JSON

```
{
   "Version":"2012-10-17",
   "Statement": [
      {
         "Effect": "Allow",
```

```
            "Action": [
                "rds-db:connect"
            ],
            "Resource": [
                "arn:aws-cn:rds-db:us-east-2:123456789012:dbuser:*/jane_doe"
            ]
        }
    ]
}
```

The user or role has access to only those databases that the database user does. For example, suppose that your DB cluster has a database named *dev*, and another database named *test*. If the database user `jane_doe` has access only to *dev*, any users or roles that access that DB cluster with the `jane_doe` user also have access only to *dev*. This access restriction is also true for other database objects, such as tables, views, and so on.

An administrator must create IAM policies that grant entities permission to perform specific API operations on the specified resources they need. The administrator must then attach those policies to the permission sets or roles that require those permissions. For examples of policies, see Identity-based policy examples for Amazon Aurora.

Attaching an IAM policy to a permission set or role

After you create an IAM policy to allow database authentication, you need to attach the policy to a permission set or role. For a tutorial on this topic, see Create and attach your first customer managed policy in the *IAM User Guide*.

As you work through the tutorial, you can use one of the policy examples shown in this section as a starting point and tailor it to your needs. At the end of the tutorial, you have a permission set with an attached policy that can make use of the `rds-db:connect` action.

Note

You can map multiple permission sets or roles to the same database user account. For example, suppose that your IAM policy specified the following resource ARN.

```
arn:aws-cn:rds-db:us-
east-2:123456789012:dbuser:cluster-12ABC34DEFG5HIJ6KLMNOP78QR/jane_doe
```

If you attach the policy to *Jane*, *Bob*, and *Diego*, then each of those users can connect to the specified DB cluster using the `jane_doe` database account.

Creating a database account using IAM authentication

With IAM database authentication, you don't need to assign database passwords to the user accounts you create. If you remove a user that is mapped to a database account, you should also remove the database account with the `DROP USER` statement.

Note

The user name used for IAM authentication must match the case of the user name in the database.

Topics

- Using IAM authentication with Aurora MySQL
- Using IAM authentication with AuroraPostgreSQL

Using IAM authentication with Aurora MySQL

With Aurora MySQL, authentication is handled by `AWSAuthenticationPlugin`—an Amazon-provided plugin that works seamlessly with IAM to authenticate your users. Connect to the DB cluster as the master user or a different user who can create users and grant privileges. After connecting, issue the `CREATE USER` statement, as shown in the following example.

```
CREATE USER 'jane_doe' IDENTIFIED WITH AWSAuthenticationPlugin AS 'RDS';
```

The `IDENTIFIED WITH` clause allows Aurora MySQL to use the `AWSAuthenticationPlugin` to authenticate the database account (`jane_doe`). The `AS 'RDS'` clause refers to the authentication method. Make sure the specified database user name is the same as a resource in the IAM policy for IAM database access. For more information, see Creating and using an IAM policy for IAM database access.

Note

If you see the following message, it means that the Amazon-provided plugin is not available for the current DB cluster.

```
ERROR 1524 (HY000): Plugin 'AWSAuthenticationPlugin' is not loaded
```

To troubleshoot this error, verify that you are using a supported configuration and that you have enabled IAM database authentication on your DB cluster. For more information, see Region and version availability and Enabling and disabling IAM database authentication.

After you create an account using `AWSAuthenticationPlugin`, you manage it in the same way as other database accounts. For example, you can modify account privileges with `GRANT` and `REVOKE` statements, or modify various account attributes with the `ALTER USER` statement.

Database network traffic is encrypted using SSL/TLS when using IAM. To allow SSL connections, modify the user account with the following command.

```
ALTER USER 'jane_doe'@'%' REQUIRE SSL;
```

Using IAM authentication with AuroraPostgreSQL

To use IAM authentication with Aurora PostgreSQL, connect to the DB cluster as the master user or a different user who can create users and grant privileges. After connecting, create database users and then grant them the `rds_iam` role as shown in the following example.

```
CREATE USER db_userx;
GRANT rds_iam TO db_userx;
```

Make sure the specified database user name is the same as a resource in the IAM policy for IAM database access. For more information, see Creating and using an IAM policy for IAM database access. You must grant the `rds_iam` role to use IAM authentication. You can use nested memberships or indirect grants of the role as well.

Note that a PostgreSQL database user can use either IAM or Kerberos authentication but not both, so this user can't also have the `rds_ad` role. This also applies to nested memberships. For more information, see Step 7: Create PostgreSQL users for your Kerberos principals.

Connecting to your DB cluster using IAM authentication

With IAM database authentication, you use an authentication token when you connect to your DB cluster. An *authentication token* is a string of characters that you use instead of a password. After you generate an authentication token, it's valid for 15 minutes before it expires. If you try to connect using an expired token, the connection request is denied.

Every authentication token must be accompanied by a valid signature, using Amazon signature version 4. (For more information, see Signature Version 4 signing process in the *Amazon Web Services General Reference.*) The Amazon CLI and an Amazon SDK, such as the Amazon SDK for Java or Amazon SDK for Python (Boto3), can automatically sign each token you create.

You can use an authentication token when you connect to Amazon Aurora from another Amazon service, such as Amazon Lambda. By using a token, you can avoid placing a password in your code. Alternatively, you can use an Amazon SDK to programmatically create and programmatically sign an authentication token.

After you have a signed IAM authentication token, you can connect to an Aurora DB cluster. Following, you can find out how to do this using either a command line tool or an Amazon SDK, such as the Amazon SDK for Java or Amazon SDK for Python (Boto3).

For more information, see the following blog posts:

- Use IAM authentication to connect with SQL Workbench/J to Aurora MySQL or Amazon RDS for MySQL
- Using IAM authentication to connect with pgAdmin Amazon Aurora PostgreSQL or Amazon RDS for PostgreSQL

Prerequisites

The following are prerequisites for connecting to your DB cluster using IAM authentication:

- Enabling and disabling IAM database authentication
- Creating and using an IAM policy for IAM database access
- Creating a database account using IAM authentication

Topics

- Connecting to your DB cluster using IAM authentication with the Amazon drivers
- Connecting to your DB cluster using IAM authentication from the command line: Amazon CLI and mysql client
- Connecting to your DB cluster using IAM authentication from the command line: Amazon CLI and psql client
- Connecting to your DB cluster using IAM authentication and the Amazon SDK for .NET
- Connecting to your DB cluster using IAM authentication and the Amazon SDK for Go
- Connecting to your DB cluster using IAM authentication and the Amazon SDK for Java
- Connecting to your DB cluster using IAM authentication and the Amazon SDK for Python (Boto3)

Connecting to your DB cluster using IAM authentication with the Amazon drivers

The Amazon suite of drivers has been designed to provide support for faster switchover and failover times, and authentication with Amazon Secrets Manager, Amazon Identity and Access Management (IAM), and Federated Identity. The Amazon drivers rely on monitoring DB cluster status and being aware of the cluster topology to determine the new writer. This approach reduces switchover and failover times to single-digit seconds, compared to tens of seconds for open-source drivers.

For more information on the Amazon drivers, see the corresponding language driver for your Aurora MySQL or Aurora PostgreSQL DB cluster.

Connecting to your DB cluster using IAM authentication from the command line: Amazon CLI and mysql client

You can connect from the command line to an Aurora DB cluster with the Amazon CLI and `mysql` command line tool as described following.

Prerequisites

The following are prerequisites for connecting to your DB cluster using IAM authentication:

- Enabling and disabling IAM database authentication
- Creating and using an IAM policy for IAM database access
- Creating a database account using IAM authentication

> **Note**
>
> For information about connecting to your database using SQL Workbench/J with IAM authentication, see the blog post Use IAM authentication to connect with SQL Workbench/J to Aurora MySQL or Amazon RDS for MySQL.

Topics

- Generating an IAM authentication token
- Connecting to a DB cluster

Generating an IAM authentication token

The following example shows how to get a signed authentication token using the Amazon CLI.

```
aws rds generate-db-auth-token \
   --hostname rdsmysql.123456789012.us-west-2.rds.amazonaws.com \
   --port 3306 \
   --region us-west-2 \
   --username jane_doe
```

In the example, the parameters are as follows:

- `--hostname` – The host name of the DB cluster that you want to access
- `--port` – The port number used for connecting to your DB cluster
- `--region` – The Amazon Region where the DB cluster is running
- `--username` – The database account that you want to access

The first several characters of the token look like the following.

```
rdsmysql.123456789012.us-west-2.rds.amazonaws.com:3306/?
Action=connect&DBUser=jane_doe&X-Amz-Algorithm=AWS4-HMAC-SHA256&X-Amz-Expires=900...
```

> **Note**
>
> You cannot use a custom Route 53 DNS record instead of the DB cluster endpoint to generate the authentication token.

Connecting to a DB cluster

The general format for connecting is shown following.

```
mysql --host=hostName --port=portNumber --ssl-ca=full_path_to_ssl_certificate --enable-cleartext-plugin --user=userName --password=authToken
```

The parameters are as follows:

- `--host` – The host name of the DB cluster that you want to access
- `--port` – The port number used for connecting to your DB cluster
- `--ssl-ca` – The full path to the SSL certificate file that contains the public key

  For more information, see TLS connections to Aurora MySQL DB clusters.

  To download an SSL certificate, see Using SSL/TLS to encrypt a connection to a DB cluster.
- `--enable-cleartext-plugin` – A value that specifies that `AWSAuthenticationPlugin` must be used for this connection

  If you are using a MariaDB client, the `--enable-cleartext-plugin` option isn't required.
- `--user` – The database account that you want to access
- `--password` – A signed IAM authentication token

The authentication token consists of several hundred characters. It can be unwieldy on the command line. One way to work around this is to save the token to an environment variable, and then use that variable when you connect. The following example shows one way to perform this workaround. In the example, */sample_dir/* is the full path to the SSL certificate file that contains the public key.

```
RDSHOST="mysqlcluster.cluster-123456789012.us-east-1.rds.amazonaws.com"
```

```
TOKEN="$(aws rds generate-db-auth-token --hostname $RDSHOST --port 3306 --region us-
west-2 --username jane_doe )"

mysql --host=$RDSHOST --port=3306 --ssl-ca=/sample_dir/global-bundle.pem --enable-
cleartext-plugin --user=jane_doe --password=$TOKEN
```

When you connect using `AWSAuthenticationPlugin`, the connection is secured using SSL. To verify this, type the following at the `mysql>` command prompt.

```
show status like 'Ssl%';
```

The following lines in the output show more details.

```
+---------------+-------------+
| Variable_name | Value

                                                                    |

+---------------+-------------+
| ...           | ...
| Ssl_cipher    | AES256-SHA

                                                                    |

| ...           | ...
| Ssl_version   | TLSv1.1

                                                                    |

| ...           | ...
+-----------------------------+
```

If you want to connect to a DB cluster through a proxy, see Connecting to a database using IAM authentication.

Connecting to your DB cluster using IAM authentication from the command line: Amazon CLI and psql client

You can connect from the command line to an Aurora PostgreSQL DB cluster with the Amazon CLI and psql command line tool as described following.

Prerequisites

The following are prerequisites for connecting to your DB cluster using IAM authentication:

- Enabling and disabling IAM database authentication
- Creating and using an IAM policy for IAM database access
- Creating a database account using IAM authentication

> **Note**
>
> For information about connecting to your database using pgAdmin with IAM authentication, see the blog post Using IAM authentication to connect with pgAdmin Amazon Aurora PostgreSQL or Amazon RDS for PostgreSQL.

Topics

- Generating an IAM authentication token
- Connecting to an Aurora PostgreSQL cluster

Generating an IAM authentication token

The authentication token consists of several hundred characters so it can be unwieldy on the command line. One way to work around this is to save the token to an environment variable, and then use that variable when you connect. The following example shows how to use the Amazon CLI to get a signed authentication token using the `generate-db-auth-token` command, and store it in a PGPASSWORD environment variable.

```
export RDSHOST="mypostgres-cluster.cluster-123456789012.us-west-2.rds.amazonaws.com"
export PGPASSWORD="$(aws rds generate-db-auth-token --hostname $RDSHOST --port 5432 --
region us-west-2 --username jane_doe )"
```

In the example, the parameters to the `generate-db-auth-token` command are as follows:

- `--hostname` – The host name of the DB cluster (cluster endpoint) that you want to access
- `--port` – The port number used for connecting to your DB cluster
- `--region` – The Amazon Region where the DB cluster is running
- `--username` – The database account that you want to access

The first several characters of the generated token look like the following.

```
mypostgres-cluster.cluster-123456789012.us-west-2.rds.amazonaws.com:5432/?
Action=connect&DBUser=jane_doe&X-Amz-Algorithm=AWS4-HMAC-SHA256&X-Amz-Expires=900...
```

> **Note**
>
> You cannot use a custom Route 53 DNS record instead of the DB cluster endpoint to generate the authentication token.

Connecting to an Aurora PostgreSQL cluster

The general format for using psql to connect is shown following.

```
psql "host=hostName port=portNumber sslmode=verify-full
 sslrootcert=full_path_to_ssl_certificate dbname=DBName user=userName
 password=authToken"
```

The parameters are as follows:

- `host` – The host name of the DB cluster (cluster endpoint) that you want to access
- `port` – The port number used for connecting to your DB cluster
- `sslmode` – The SSL mode to use

  When you use `sslmode=verify-full`, the SSL connection verifies the DB cluster endpoint against the endpoint in the SSL certificate.
- `sslrootcert` – The full path to the SSL certificate file that contains the public key

  For more information, see Securing Aurora PostgreSQL data with SSL/TLS.

  To download an SSL certificate, see Using SSL/TLS to encrypt a connection to a DB cluster.
- dbname – The database that you want to access
- `user` – The database account that you want to access
- `password` – A signed IAM authentication token

> **Note**
>
> You cannot use a custom Route 53 DNS record instead of the DB cluster endpoint to generate the authentication token.

The following example shows using psql to connect. In the example, psql uses the environment variable RDSHOST for the host and the environment variable PGPASSWORD for the generated token. Also, */sample_dir/* is the full path to the SSL certificate file that contains the public key.

```
export RDSHOST="mypostgres-cluster.cluster-123456789012.us-west-2.rds.amazonaws.com"
export PGPASSWORD="$(aws rds generate-db-auth-token --hostname $RDSHOST --port 5432 --
region us-west-2 --username jane_doe )"

psql "host=$RDSHOST port=5432 sslmode=verify-full sslrootcert=/sample_dir/global-
bundle.pem dbname=DBName user=jane_doe password=$PGPASSWORD"
```

If you want to connect to a DB cluster through a proxy, see Connecting to a database using IAM authentication.

Connecting to your DB cluster using IAM authentication and the Amazon SDK for .NET

You can connect to an Aurora MySQL or Aurora PostgreSQL DB cluster with the Amazon SDK for .NET as described following.

Prerequisites

The following are prerequisites for connecting to your DB cluster using IAM authentication:

- Enabling and disabling IAM database authentication
- Creating and using an IAM policy for IAM database access
- Creating a database account using IAM authentication

Examples

The following code examples show how to generate an authentication token, and then use it to connect to a DB cluster.

To run this code example, you need the Amazon SDK for .NET, found on the Amazon site. The AWSSDK.CORE and the AWSSDK.RDS packages are required. To connect to a DB cluster, use

the .NET database connector for the DB engine, such as MySqlConnector for MariaDB or MySQL, or Npgsql for PostgreSQL.

This code connects to an Aurora MySQL DB cluster. Modify the values of the following variables as needed:

- `server` – The endpoint of the DB cluster that you want to access
- `user` – The database account that you want to access
- `database` – The database that you want to access
- `port` – The port number used for connecting to your DB cluster
- `SslMode` – The SSL mode to use

  When you use `SslMode=Required`, the SSL connection verifies the DB cluster endpoint against the endpoint in the SSL certificate.
- `SslCa` – The full path to the SSL certificate for Amazon Aurora

  To download a certificate, see Using SSL/TLS to encrypt a connection to a DB cluster.

> **Note**
>
> You cannot use a custom Route 53 DNS record instead of the DB cluster endpoint to generate the authentication token.

```
using System;
using System.Data;
using MySql.Data;
using MySql.Data.MySqlClient;
using Amazon;

namespace ubuntu
{
  class Program
  {
    static void Main(string[] args)
    {
      var pwd =
 Amazon.RDS.Util.RDSAuthTokenGenerator.GenerateAuthToken(RegionEndpoint.USEast1,
 "mysqlcluster.cluster-123456789012.us-east-1.rds.amazonaws.com", 3306, "jane_doe");
```

```
      // for debug only Console.Write("{0}\n", pwd);  //this verifies the token is
 generated

      MySqlConnection conn = new
 MySqlConnection($"server=mysqlcluster.cluster-123456789012.us-
east-1.rds.amazonaws.com;user=jane_doe;database=mydB;port=3306;password={pwd};SslMode=Required;
      conn.Open();

      // Define a query
      MySqlCommand sampleCommand = new MySqlCommand("SHOW DATABASES;", conn);

      // Execute a query
      MySqlDataReader mysqlDataRdr = sampleCommand.ExecuteReader();

      // Read all rows and output the first column in each row
      while (mysqlDataRdr.Read())
        Console.WriteLine(mysqlDataRdr[0]);

      mysqlDataRdr.Close();
      // Close connection
      conn.Close();
    }
  }
}
```

This code connects to an Aurora PostgreSQL DB cluster.

Modify the values of the following variables as needed:

- `Server` – The endpoint of the DB cluster that you want to access
- `User ID` – The database account that you want to access
- `Database` – The database that you want to access
- `Port` – The port number used for connecting to your DB cluster
- `SSL Mode` – The SSL mode to use

  When you use `SSL Mode=Required`, the SSL connection verifies the DB cluster endpoint against the endpoint in the SSL certificate.
- `Root Certificate` – The full path to the SSL certificate for Amazon Aurora

  To download a certificate, see Using SSL/TLS to encrypt a connection to a DB cluster.

Note

You cannot use a custom Route 53 DNS record instead of the DB cluster endpoint to generate the authentication token.

```
using System;
using Npgsql;
using Amazon.RDS.Util;

namespace ConsoleApp1
{
    class Program
    {
        static void Main(string[] args)
        {
            var pwd =
 RDSAuthTokenGenerator.GenerateAuthToken("postgresmycluster.cluster-123456789012.us-
east-1.rds.amazonaws.com", 5432, "jane_doe");
// for debug only Console.Write("{0}\n", pwd);  //this verifies the token is generated

            NpgsqlConnection conn = new
 NpgsqlConnection($"Server=postgresmycluster.cluster-123456789012.us-
east-1.rds.amazonaws.com;User Id=jane_doe;Password={pwd};Database=mydb;SSL
 Mode=Require;Root Certificate=full_path_to_ssl_certificate");
            conn.Open();

            // Define a query
                   NpgsqlCommand cmd = new NpgsqlCommand("select count(*) FROM
 pg_user", conn);

            // Execute a query
            NpgsqlDataReader dr = cmd.ExecuteReader();

            // Read all rows and output the first column in each row
            while (dr.Read())
                Console.Write("{0}\n", dr[0]);

            // Close connection
            conn.Close();
        }
    }
```

```
}
```

If you want to connect to a DB cluster through a proxy, see Connecting to a database using IAM authentication.

Connecting to your DB cluster using IAM authentication and the Amazon SDK for Go

You can connect to an Aurora MySQL or Aurora PostgreSQL DB cluster with the Amazon SDK for Go as described following.

Prerequisites

The following are prerequisites for connecting to your DB cluster using IAM authentication:

- Enabling and disabling IAM database authentication
- Creating and using an IAM policy for IAM database access
- Creating a database account using IAM authentication

Examples

To run these code examples, you need the Amazon SDK for Go, found on the Amazon site.

Modify the values of the following variables as needed:

- `dbName` – The database that you want to access
- `dbUser` – The database account that you want to access
- `dbHost` – The endpoint of the DB cluster that you want to access

> **Note**
>
> You cannot use a custom Route 53 DNS record instead of the DB cluster endpoint to generate the authentication token.

- `dbPort` – The port number used for connecting to your DB cluster
- `region` – The Amazon Region where the DB cluster is running

In addition, make sure the imported libraries in the sample code exist on your system.

Important

The examples in this section use the following code to provide credentials that access a database from a local environment:

```
creds := credentials.NewEnvCredentials()
```

If you are accessing a database from an Amazon service, such as Amazon EC2 or Amazon ECS, you can replace the code with the following code:

```
sess := session.Must(session.NewSession())
creds := sess.Config.Credentials
```

If you make this change, make sure you add the following import:

```
"github.com/aws/aws-sdk-go/aws/session"
```

Topics

- Connecting using IAM authentication and the Amazon SDK for Go V2
- Connecting using IAM authentication and the Amazon SDK for Go V1.

Connecting using IAM authentication and the Amazon SDK for Go V2

You can connect to a DB cluster using IAM authentication and the Amazon SDK for Go V2.

The following code examples show how to generate an authentication token, and then use it to connect to a DB cluster.

This code connects to an Aurora MySQL DB cluster.

```
package main

import (
     "context"
     "database/sql"
     "fmt"

     "github.com/aws/aws-sdk-go-v2/config"
     "github.com/aws/aws-sdk-go-v2/feature/rds/auth"
     _ "github.com/go-sql-driver/mysql"
)

func main() {
```

```
     var dbName string = "DatabaseName"
     var dbUser string = "DatabaseUser"
     var dbHost string = "mysqlcluster.cluster-123456789012.us-
east-1.rds.amazonaws.com"
     var dbPort int = 3306
     var dbEndpoint string = fmt.Sprintf("%s:%d", dbHost, dbPort)
     var region string = "us-east-1"

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
     panic("configuration error: " + err.Error())
    }

    authenticationToken, err := auth.BuildAuthToken(
     context.TODO(), dbEndpoint, region, dbUser, cfg.Credentials)
    if err != nil {
     panic("failed to create authentication token: " + err.Error())
    }

    dsn := fmt.Sprintf("%s:%s@tcp(%s)/%s?tls=true&allowCleartextPasswords=true",
        dbUser, authenticationToken, dbEndpoint, dbName,
    )

    db, err := sql.Open("mysql", dsn)
    if err != nil {
        panic(err)
    }

    err = db.Ping()
    if err != nil {
        panic(err)
    }
}
```

This code connects to an Aurora PostgreSQL DB cluster.

```
package main

import (
     "context"
     "database/sql"
     "fmt"
```

```
     "github.com/aws/aws-sdk-go-v2/config"
     "github.com/aws/aws-sdk-go-v2/feature/rds/auth"
     _ "github.com/lib/pq"
)

func main() {

     var dbName string = "DatabaseName"
     var dbUser string = "DatabaseUser"
     var dbHost string = "postgresmycluster.cluster-123456789012.us-
east-1.rds.amazonaws.com"
     var dbPort int = 5432
     var dbEndpoint string = fmt.Sprintf("%s:%d", dbHost, dbPort)
     var region string = "us-east-1"

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
     panic("configuration error: " + err.Error())
    }

    authenticationToken, err := auth.BuildAuthToken(
     context.TODO(), dbEndpoint, region, dbUser, cfg.Credentials)
    if err != nil {
     panic("failed to create authentication token: " + err.Error())
    }

    dsn := fmt.Sprintf("host=%s port=%d user=%s password=%s dbname=%s",
        dbHost, dbPort, dbUser, authenticationToken, dbName,
    )

    db, err := sql.Open("postgres", dsn)
    if err != nil {
        panic(err)
    }

    err = db.Ping()
    if err != nil {
        panic(err)
    }
}
```

If you want to connect to a DB cluster through a proxy, see Connecting to a database using IAM authentication.

Connecting using IAM authentication and the Amazon SDK for Go V1.

You can connect to a DB cluster using IAM authentication and the Amazon SDK for Go V1

The following code examples show how to generate an authentication token, and then use it to connect to a DB cluster.

This code connects to an Aurora MySQL DB cluster.

```
package main

import (
    "database/sql"
    "fmt"
    "log"

    "github.com/aws/aws-sdk-go/aws/credentials"
    "github.com/aws/aws-sdk-go/service/rds/rdsutils"
    _ "github.com/go-sql-driver/mysql"
)

func main() {
    dbName := "app"
    dbUser := "jane_doe"
    dbHost := "mysqlcluster.cluster-123456789012.us-east-1.rds.amazonaws.com"
    dbPort := 3306
    dbEndpoint := fmt.Sprintf("%s:%d", dbHost, dbPort)
    region := "us-east-1"

    creds := credentials.NewEnvCredentials()
    authToken, err := rdsutils.BuildAuthToken(dbEndpoint, region, dbUser, creds)
    if err != nil {
        panic(err)
    }

    dsn := fmt.Sprintf("%s:%s@tcp(%s)/%s?tls=true&allowCleartextPasswords=true",
        dbUser, authToken, dbEndpoint, dbName,
    )

    db, err := sql.Open("mysql", dsn)
    if err != nil {
```

```
        panic(err)
    }

    err = db.Ping()
    if err != nil {
        panic(err)
    }
}
```

This code connects to an Aurora PostgreSQL DB cluster.

```
package main

import (
 "database/sql"
 "fmt"

 "github.com/aws/aws-sdk-go/aws/credentials"
 "github.com/aws/aws-sdk-go/service/rds/rdsutils"
 _ "github.com/lib/pq"
)

func main() {
    dbName := "app"
    dbUser := "jane_doe"
    dbHost := "postgresmycluster.cluster-123456789012.us-east-1.rds.amazonaws.com"
    dbPort := 5432
    dbEndpoint := fmt.Sprintf("%s:%d", dbHost, dbPort)
    region := "us-east-1"

    creds := credentials.NewEnvCredentials()
    authToken, err := rdsutils.BuildAuthToken(dbEndpoint, region, dbUser, creds)
    if err != nil {
        panic(err)
    }

    dsn := fmt.Sprintf("host=%s port=%d user=%s password=%s dbname=%s",
        dbHost, dbPort, dbUser, authToken, dbName,
    )

    db, err := sql.Open("postgres", dsn)
    if err != nil {
        panic(err)
```

```
    }

    err = db.Ping()
    if err != nil {
        panic(err)
    }
}
```

If you want to connect to a DB cluster through a proxy, see Connecting to a database using IAM authentication.

Connecting to your DB cluster using IAM authentication and the Amazon SDK for Java

You can connect to an Aurora MySQL or Aurora PostgreSQL DB cluster with the Amazon SDK for Java as described following.

Prerequisites

The following are prerequisites for connecting to your DB cluster using IAM authentication:

- Enabling and disabling IAM database authentication
- Creating and using an IAM policy for IAM database access
- Creating a database account using IAM authentication
- Set up the Amazon SDK for Java

For examples on how to use the SDK for Java 2.x, see Amazon RDS examples using SDK for Java 2.x. You can also use the Amazon Advanced JDBC Wrapper, see Amazon Advanced JDBC Wrapper documentation.

Topics

- Generating an IAM authentication token
- Manually constructing an IAM authentication token
- Connecting to a DB cluster

Generating an IAM authentication token

If you are writing programs using the Amazon SDK for Java, you can get a signed authentication token using the `RdsIamAuthTokenGenerator` class. Using this class requires that you provide Amazon credentials. To do this, you create an instance of the

`DefaultAWSCredentialsProviderChain` class. `DefaultAWSCredentialsProviderChain` uses the first Amazon access key and secret key that it finds in the default credential provider chain. For more information about Amazon access keys, see Managing access keys for users.

> **Note**
>
> You cannot use a custom Route 53 DNS record instead of the DB cluster endpoint to generate the authentication token.

After you create an instance of `RdsIamAuthTokenGenerator`, you can call the `getAuthToken` method to obtain a signed token. Provide the Amazon Region, host name, port number, and user name. The following code example illustrates how to do this.

```
package com.amazonaws.codesamples;

import com.amazonaws.auth.DefaultAWSCredentialsProviderChain;
import com.amazonaws.services.rds.auth.GetIamAuthTokenRequest;
import com.amazonaws.services.rds.auth.RdsIamAuthTokenGenerator;

public class GenerateRDSAuthToken {

    public static void main(String[] args) {

     String region = "us-west-2";
     String hostname = "rdsmysql.123456789012.us-west-2.rds.amazonaws.com";
     String port = "3306";
     String username = "jane_doe";

     System.out.println(generateAuthToken(region, hostname, port, username));
    }

    static String generateAuthToken(String region, String hostName, String port, String
 username) {

     RdsIamAuthTokenGenerator generator = RdsIamAuthTokenGenerator.builder()
      .credentials(new DefaultAWSCredentialsProviderChain())
      .region(region)
      .build();

     String authToken = generator.getAuthToken(
      GetIamAuthTokenRequest.builder()
```

```
      .hostname(hostName)
      .port(Integer.parseInt(port))
      .userName(username)
      .build());

     return authToken;
    }

}
```

Manually constructing an IAM authentication token

In Java, the easiest way to generate an authentication token is to use `RdsIamAuthTokenGenerator`. This class creates an authentication token for you, and then signs it using Amazon signature version 4. For more information, see Signature version 4 signing process in the *Amazon Web Services General Reference.*

However, you can also construct and sign an authentication token manually, as shown in the following code example.

```
package com.amazonaws.codesamples;

import com.amazonaws.SdkClientException;
import com.amazonaws.auth.DefaultAWSCredentialsProviderChain;
import com.amazonaws.auth.SigningAlgorithm;
import com.amazonaws.util.BinaryUtils;
import org.apache.commons.lang3.StringUtils;

import javax.crypto.Mac;
import javax.crypto.spec.SecretKeySpec;
import java.nio.charset.Charset;
import java.security.MessageDigest;
import java.text.SimpleDateFormat;
import java.util.Date;
import java.util.SortedMap;
import java.util.TreeMap;

import static com.amazonaws.auth.internal.SignerConstants.AWS4_TERMINATOR;
import static com.amazonaws.util.StringUtils.UTF8;

public class CreateRDSAuthTokenManually {
    public static String httpMethod = "GET";
    public static String action = "connect";
```

```
    public static String canonicalURIParameter = "/";
    public static SortedMap<String, String> canonicalQueryParameters = new TreeMap();
    public static String payload = StringUtils.EMPTY;
    public static String signedHeader = "host";
    public static String algorithm = "AWS4-HMAC-SHA256";
    public static String serviceName = "rds-db";
    public static String requestWithoutSignature;

    public static void main(String[] args) throws Exception {

        String region = "us-west-2";
        String instanceName = "rdsmysql.123456789012.us-west-2.rds.amazonaws.com";
        String port = "3306";
        String username = "jane_doe";

        Date now = new Date();
        String date = new SimpleDateFormat("yyyyMMdd").format(now);
        String dateTimeStamp = new
SimpleDateFormat("yyyyMMdd'T'HHmmss'Z'").format(now);
        DefaultAWSCredentialsProviderChain creds = new
DefaultAWSCredentialsProviderChain();
    String awsAccessKey = creds.getCredentials().getAWSAccessKeyId();
    String awsSecretKey = creds.getCredentials().getAWSSecretKey();
        String expiryMinutes = "900";

        System.out.println("Step 1:  Create a canonical request:");
        String canonicalString = createCanonicalString(username, awsAccessKey, date,
dateTimeStamp, region, expiryMinutes, instanceName, port);
        System.out.println(canonicalString);
        System.out.println();

        System.out.println("Step 2:  Create a string to sign:");
        String stringToSign = createStringToSign(dateTimeStamp, canonicalString,
awsAccessKey, date, region);
        System.out.println(stringToSign);
        System.out.println();

        System.out.println("Step 3:  Calculate the signature:");
        String signature = BinaryUtils.toHex(calculateSignature(stringToSign,
newSigningKey(awsSecretKey, date, region, serviceName)));
        System.out.println(signature);
        System.out.println();
```

```
        System.out.println("Step 4:  Add the signing info to the request");

        System.out.println(appendSignature(signature));
        System.out.println();

    }

    //Step 1: Create a canonical request date should be in format YYYYMMDD and dateTime
should be in format YYYYMMDDTHHMMSSZ
    public static String createCanonicalString(String user, String accessKey, String
date, String dateTime, String region, String expiryPeriod, String hostName, String
port) throws Exception {
        canonicalQueryParameters.put("Action", action);
        canonicalQueryParameters.put("DBUser", user);
        canonicalQueryParameters.put("X-Amz-Algorithm", "AWS4-HMAC-SHA256");
        canonicalQueryParameters.put("X-Amz-Credential", accessKey + "%2F" + date +
"%2F" + region + "%2F" + serviceName + "%2Faws4_request");
        canonicalQueryParameters.put("X-Amz-Date", dateTime);
        canonicalQueryParameters.put("X-Amz-Expires", expiryPeriod);
        canonicalQueryParameters.put("X-Amz-SignedHeaders", signedHeader);
        String canonicalQueryString = "";
        while(!canonicalQueryParameters.isEmpty()) {
            String currentQueryParameter = canonicalQueryParameters.firstKey();
            String currentQueryParameterValue =
canonicalQueryParameters.remove(currentQueryParameter);
            canonicalQueryString = canonicalQueryString + currentQueryParameter + "=" +
currentQueryParameterValue;
            if (!currentQueryParameter.equals("X-Amz-SignedHeaders")) {
                canonicalQueryString += "&";
            }
        }
        String canonicalHeaders = "host:" + hostName + ":" + port + '\n';
        requestWithoutSignature = hostName + ":" + port + "/?" + canonicalQueryString;

        String hashedPayload = BinaryUtils.toHex(hash(payload));
        return httpMethod + '\n' + canonicalURIParameter + '\n' + canonicalQueryString
+ '\n' + canonicalHeaders + '\n' + signedHeader + '\n' + hashedPayload;

    }

    //Step 2: Create a string to sign using sig v4
    public static String createStringToSign(String dateTime, String canonicalRequest,
String accessKey, String date, String region) throws Exception {
```

```
        String credentialScope = date + "/" + region + "/" + serviceName + "/
aws4_request";
        return algorithm + '\n' + dateTime + '\n' + credentialScope + '\n' +
 BinaryUtils.toHex(hash(canonicalRequest));

    }

    //Step 3: Calculate signature
    /**
     * Step 3 of the &AWS; Signature version 4 calculation. It involves deriving
     * the signing key and computing the signature. Refer to
     * http://docs.aws.amazon
     * .com/general/latest/gr/sigv4-calculate-signature.html
     */
    public static byte[] calculateSignature(String stringToSign,
                                            byte[] signingKey) {
        return sign(stringToSign.getBytes(Charset.forName("UTF-8")), signingKey,
                SigningAlgorithm.HmacSHA256);
    }

    public static byte[] sign(byte[] data, byte[] key,
                          SigningAlgorithm algorithm) throws SdkClientException {
        try {
            Mac mac = algorithm.getMac();
            mac.init(new SecretKeySpec(key, algorithm.toString()));
            return mac.doFinal(data);
        } catch (Exception e) {
            throw new SdkClientException(
                    "Unable to calculate a request signature: "
                            + e.getMessage(), e);
        }
    }

    public static byte[] newSigningKey(String secretKey,
                                   String dateStamp, String regionName, String
 serviceName) {
        byte[] kSecret = ("AWS4" + secretKey).getBytes(Charset.forName("UTF-8"));
        byte[] kDate = sign(dateStamp, kSecret, SigningAlgorithm.HmacSHA256);
        byte[] kRegion = sign(regionName, kDate, SigningAlgorithm.HmacSHA256);
        byte[] kService = sign(serviceName, kRegion,
                SigningAlgorithm.HmacSHA256);
        return sign(AWS4_TERMINATOR, kService, SigningAlgorithm.HmacSHA256);
    }
```

```
    public static byte[] sign(String stringData, byte[] key,
                      SigningAlgorithm algorithm) throws SdkClientException {
        try {
            byte[] data = stringData.getBytes(UTF8);
            return sign(data, key, algorithm);
        } catch (Exception e) {
            throw new SdkClientException(
                    "Unable to calculate a request signature: "
                            + e.getMessage(), e);
        }
    }

    //Step 4: append the signature
    public static String appendSignature(String signature) {
        return requestWithoutSignature + "&X-Amz-Signature=" + signature;
    }

    public static byte[] hash(String s) throws Exception {
        try {
            MessageDigest md = MessageDigest.getInstance("SHA-256");
            md.update(s.getBytes(UTF8));
            return md.digest();
        } catch (Exception e) {
            throw new SdkClientException(
                    "Unable to compute hash while signing request: "
                            + e.getMessage(), e);
        }
    }
}
```

Connecting to a DB cluster

The following code example shows how to generate an authentication token, and then use it to connect to a cluster running Aurora MySQL.

To run this code example, you need the Amazon SDK for Java, found on the Amazon site. In addition, you need the following:

- MySQL Connector/J. This code example was tested with `mysql-connector-java-5.1.33-bin.jar`.
- An intermediate certificate for Amazon Aurora that is specific to an Amazon Region. (For more information, see Using SSL/TLS to encrypt a connection to a DB cluster.) At runtime, the class

loader looks for the certificate in the same directory as this Java code example, so that the class loader can find it.

- Modify the values of the following variables as needed:
  - `RDS_INSTANCE_HOSTNAME` – The host name of the DB cluster that you want to access.
  - `RDS_INSTANCE_PORT` – The port number used for connecting to your PostgreSQL DB cluster.
  - `REGION_NAME` – The Amazon Region where the DB cluster is running.
  - `DB_USER` – The database account that you want to access.
  - `SSL_CERTIFICATE` – An SSL certificate for Amazon Aurora that is specific to an Amazon Region.

    To download a certificate for your Amazon Region, see Using SSL/TLS to encrypt a connection to a DB cluster. Place the SSL certificate in the same directory as this Java program file, so that the class loader can find the certificate at runtime.

This code example obtains Amazon credentials from the default credential provider chain.

> **Note**
>
> Specify a password for `DEFAULT_KEY_STORE_PASSWORD` other than the prompt shown here as a security best practice.

```
package com.amazonaws.samples;

import com.amazonaws.services.rds.auth.RdsIamAuthTokenGenerator;
import com.amazonaws.services.rds.auth.GetIamAuthTokenRequest;
import com.amazonaws.auth.BasicAWSCredentials;
import com.amazonaws.auth.DefaultAWSCredentialsProviderChain;
import com.amazonaws.auth.AWSStaticCredentialsProvider;

import java.io.File;
import java.io.FileOutputStream;
import java.io.InputStream;
import java.security.KeyStore;
import java.security.cert.CertificateFactory;
import java.security.cert.X509Certificate;

import java.sql.Connection;
```

```
import java.sql.DriverManager;
import java.sql.ResultSet;
import java.sql.Statement;
import java.util.Properties;

import java.net.URL;

public class IAMDatabaseAuthenticationTester {
    //&AWS; Credentials of the IAM user with policy enabling IAM Database Authenticated
 access to the db by the db user.
    private static final DefaultAWSCredentialsProviderChain creds = new
 DefaultAWSCredentialsProviderChain();
    private static final String AWS_ACCESS_KEY =
 creds.getCredentials().getAWSAccessKeyId();
    private static final String AWS_SECRET_KEY =
 creds.getCredentials().getAWSSecretKey();

    //Configuration parameters for the generation of the IAM Database Authentication
 token
    private static final String RDS_INSTANCE_HOSTNAME = "rdsmysql.123456789012.us-
west-2.rds.amazonaws.com";
    private static final int RDS_INSTANCE_PORT = 3306;
    private static final String REGION_NAME = "us-west-2";
    private static final String DB_USER = "jane_doe";
    private static final String JDBC_URL = "jdbc:mysql://" + RDS_INSTANCE_HOSTNAME +
 ":" + RDS_INSTANCE_PORT;

    private static final String SSL_CERTIFICATE = "rds-ca-2019-us-west-2.pem";

    private static final String KEY_STORE_TYPE = "JKS";
    private static final String KEY_STORE_PROVIDER = "SUN";
    private static final String KEY_STORE_FILE_PREFIX = "sys-connect-via-ssl-test-
cacerts";
    private static final String KEY_STORE_FILE_SUFFIX = ".jks";
    private static final String DEFAULT_KEY_STORE_PASSWORD = "changeit";

    public static void main(String[] args) throws Exception {
        //get the connection
        Connection connection = getDBConnectionUsingIam();

        //verify the connection is successful
        Statement stmt= connection.createStatement();
        ResultSet rs=stmt.executeQuery("SELECT 'Success!' FROM DUAL;");
        while (rs.next()) {
```

```
             String id = rs.getString(1);
            System.out.println(id); //Should print "Success!"
        }

        //close the connection
        stmt.close();
        connection.close();

        clearSslProperties();

    }

    /**
     * This method returns a connection to the db instance authenticated using IAM
 Database Authentication
     * @return
     * @throws Exception
     */
    private static Connection getDBConnectionUsingIam() throws Exception {
        setSslProperties();
        return DriverManager.getConnection(JDBC_URL, setMySqlConnectionProperties());
    }

    /**
     * This method sets the mysql connection properties which includes the IAM Database
 Authentication token
     * as the password. It also specifies that SSL verification is required.
     * @return
     */
    private static Properties setMySqlConnectionProperties() {
        Properties mysqlConnectionProperties = new Properties();
        mysqlConnectionProperties.setProperty("verifyServerCertificate","true");
        mysqlConnectionProperties.setProperty("useSSL", "true");
        mysqlConnectionProperties.setProperty("user",DB_USER);
        mysqlConnectionProperties.setProperty("password",generateAuthToken());
        return mysqlConnectionProperties;
    }

    /**
     * This method generates the IAM Auth Token.
     * An example IAM Auth Token would look like follows:
     * btusi123.cmz7kenwo2ye.rds.cn-north-1.amazonaws.com.cn:3306/?
Action=connect&DBUser=iamtestuser&X-Amz-Algorithm=AWS4-HMAC-SHA256&X-Amz-
Date=20171003T010726Z&X-Amz-SignedHeaders=host&X-Amz-Expires=899&X-Amz-
```

```
Credential=AKIAPFXHGVDI5RNFO4AQ%2F20171003%2Fcn-north-1%2Frds-db%2Faws4_request&X-Amz-
Signature=f9f45ef96c1f770cdad11a53e33ffa4c3730bc03fdee820cfdf1322eed15483b
     * @return
     */
    private static String generateAuthToken() {
        BasicAWSCredentials awsCredentials = new BasicAWSCredentials(AWS_ACCESS_KEY,
 AWS_SECRET_KEY);

        RdsIamAuthTokenGenerator generator = RdsIamAuthTokenGenerator.builder()
                .credentials(new
 AWSStaticCredentialsProvider(awsCredentials)).region(REGION_NAME).build();
        return generator.getAuthToken(GetIamAuthTokenRequest.builder()

 .hostname(RDS_INSTANCE_HOSTNAME).port(RDS_INSTANCE_PORT).userName(DB_USER).build());
    }

    /**
     * This method sets the SSL properties which specify the key store file, its type
 and password:
     * @throws Exception
     */
    private static void setSslProperties() throws Exception {
        System.setProperty("javax.net.ssl.trustStore", createKeyStoreFile());
        System.setProperty("javax.net.ssl.trustStoreType", KEY_STORE_TYPE);
        System.setProperty("javax.net.ssl.trustStorePassword",
 DEFAULT_KEY_STORE_PASSWORD);
    }

    /**
     * This method returns the path of the Key Store File needed for the SSL
 verification during the IAM Database Authentication to
     * the db instance.
     * @return
     * @throws Exception
     */
    private static String createKeyStoreFile() throws Exception {
        return createKeyStoreFile(createCertificate()).getPath();
    }

    /**
     *  This method generates the SSL certificate
     * @return
     * @throws Exception
     */
```

```
    private static X509Certificate createCertificate() throws Exception {
        CertificateFactory certFactory = CertificateFactory.getInstance("X.509");
        URL url = new File(SSL_CERTIFICATE).toURI().toURL();
        if (url == null) {
            throw new Exception();
        }
        try (InputStream certInputStream = url.openStream()) {
            return (X509Certificate) certFactory.generateCertificate(certInputStream);
        }
    }

    /**
     * This method creates the Key Store File
     * @param rootX509Certificate - the SSL certificate to be stored in the KeyStore
     * @return
     * @throws Exception
     */
    private static File createKeyStoreFile(X509Certificate rootX509Certificate) throws
 Exception {
        File keyStoreFile = File.createTempFile(KEY_STORE_FILE_PREFIX,
 KEY_STORE_FILE_SUFFIX);
        try (FileOutputStream fos = new FileOutputStream(keyStoreFile.getPath())) {
            KeyStore ks = KeyStore.getInstance(KEY_STORE_TYPE, KEY_STORE_PROVIDER);
            ks.load(null);
            ks.setCertificateEntry("rootCaCertificate", rootX509Certificate);
            ks.store(fos, DEFAULT_KEY_STORE_PASSWORD.toCharArray());
        }
        return keyStoreFile;
    }

    /**
     * This method clears the SSL properties.
     * @throws Exception
     */
    private static void clearSslProperties() throws Exception {
           System.clearProperty("javax.net.ssl.trustStore");
           System.clearProperty("javax.net.ssl.trustStoreType");
           System.clearProperty("javax.net.ssl.trustStorePassword");
    }

}
```

If you want to connect to a DB cluster through a proxy, see Connecting to a database using IAM authentication.

Connecting to your DB cluster using IAM authentication and the Amazon SDK for Python (Boto3)

You can connect to an Aurora MySQL or Aurora PostgreSQL DB cluster with the Amazon SDK for Python (Boto3) as described following.

Prerequisites

The following are prerequisites for connecting to your DB cluster using IAM authentication:

- Enabling and disabling IAM database authentication
- Creating and using an IAM policy for IAM database access
- Creating a database account using IAM authentication

In addition, make sure the imported libraries in the sample code exist on your system.

Examples

The code examples use profiles for shared credentials. For information about the specifying credentials, see Credentials in the Amazon SDK for Python (Boto3) documentation.

The following code examples show how to generate an authentication token, and then use it to connect to a DB cluster.

To run this code example, you need the Amazon SDK for Python (Boto3), found on the Amazon site.

Modify the values of the following variables as needed:

- `ENDPOINT` – The endpoint of the DB cluster that you want to access
- `PORT` – The port number used for connecting to your DB cluster
- `USER` – The database account that you want to access
- `REGION` – The Amazon Region where the DB cluster is running
- `DBNAME` – The database that you want to access
- `SSLCERTIFICATE` – The full path to the SSL certificate for Amazon Aurora

For `ssl_ca`, specify an SSL certificate. To download an SSL certificate, see Using SSL/TLS to encrypt a connection to a DB cluster.

> **Note**
>
> You cannot use a custom Route 53 DNS record instead of the DB cluster endpoint to generate the authentication token.

This code connects to an Aurora MySQL DB cluster.

Before running this code, install the PyMySQL driver by following the instructions in the Python Package Index.

```
import pymysql
import sys
import boto3
import os

ENDPOINT="mysqlcluster.cluster-123456789012.us-east-1.rds.amazonaws.com"
PORT="3306"
USER="jane_doe"
REGION="us-east-1"
DBNAME="mydb"
os.environ['LIBMYSQL_ENABLE_CLEARTEXT_PLUGIN'] = '1'

#gets the credentials from .aws/credentials
session = boto3.Session(profile_name='default')
client = session.client('rds')

token = client.generate_db_auth_token(DBHostname=ENDPOINT, Port=PORT, DBUsername=USER,
 Region=REGION)

try:
    conn =
 pymysql.connect(auth_plugin_map={'mysql_clear_password':None},host=ENDPOINT,
 user=USER, password=token, port=PORT, database=DBNAME, ssl_ca='SSLCERTIFICATE',
 ssl_verify_identity=True, ssl_verify_cert=True)
    cur = conn.cursor()
    cur.execute("""SELECT now()""")
    query_results = cur.fetchall()
```

```
    print(query_results)
except Exception as e:
    print("Database connection failed due to {}".format(e))
```

This code connects to an Aurora PostgreSQL DB cluster.

Before running this code, install psycopg2 by following the instructions in Psycopg documentation.

```
import psycopg2
import sys
import boto3
import os

ENDPOINT="postgresmycluster.cluster-123456789012.us-east-1.rds.amazonaws.com"
PORT="5432"
USER="jane_doe"
REGION="us-east-1"
DBNAME="mydb"

#gets the credentials from .aws/credentials
session = boto3.Session(profile_name='RDSCreds')
client = session.client('rds')

token = client.generate_db_auth_token(DBHostname=ENDPOINT, Port=PORT, DBUsername=USER,
 Region=REGION)

try:
    conn = psycopg2.connect(host=ENDPOINT, port=PORT, database=DBNAME, user=USER,
 password=token, sslrootcert="SSLCERTIFICATE")
    cur = conn.cursor()
    cur.execute("""SELECT now()""")
    query_results = cur.fetchall()
    print(query_results)
except Exception as e:
    print("Database connection failed due to {}".format(e))
```

If you want to connect to a DB cluster through a proxy, see Connecting to a database using IAM authentication.

Troubleshooting for IAM DB authentication

Following, you can find troubleshooting ideas for some common IAM DB authentication issues and information on CloudWatch logs and metrics for IAM DB authentication.

Exporting IAM DB authentication error logs to CloudWatch Logs

IAM DB authentication error logs are stored on the database host, and you can export these logs your CloudWatch Logs account. Use the logs and remediation methods in this page to troubleshoot IAM DB authentication issues.

You can enable log exports to CloudWatch Logs from the console, Amazon CLI, and RDS API. For console instructions, see Publishing database logs to Amazon CloudWatch Logs.

To export your IAM DB authentication error logs to CloudWatch Logs when creating a DB cluster from the Amazon CLI, use the following command:

```
aws rds create-db-cluster --db-cluster-identifier mydbcluster \
--region us-east-1 \
--engine aurora-postgresql \
--engine-version 16 \
--master-username master \
--master-user-password password \
--enable-iam-database-authentication \
--enable-cloudwatch-logs-exports=iam-db-auth-error
```

To export your IAM DB authentication error logs to CloudWatch Logs when modifying a DB clusterfrom the Amazon CLI, use the following command:

```
aws rds modify-db-cluster --db-cluster-identifier mydbcluster \
--region us-east-1 \
--cloudwatch-logs-export-configuration '{"EnableLogTypes":["iam-db-auth-error"]}'
```

To verify if your DB cluster is exporting IAM DB authentication logs to CloudWatch Logs, check if the `EnabledCloudwatchLogsExports` parameter is set to `iam-db-auth-error` in the output for the `describe-db-instances` command.

```
aws rds describe-db-cluster --region us-east-1 --db-cluster-identifier mydbcluster
            ...
```

```
            "EnabledCloudwatchLogsExports": [
               "iam-db-auth-error"
            ],
            ...
```

IAM DB authentication CloudWatch metrics

Amazon Aurora delivers near-real time metrics about IAM DB authentication to your Amazon CloudWatch account. The following table lists the IAM DB authentication metrics available using CloudWatch:

Metric	Description
`IamDbAuthConnectionRequests`	Total number of connection requests made with IAM DB authentication.
`IamDbAuthConnectionSuccess`	Total number of successful IAM DB authentic ation requests.
`IamDbAuthConnectionFailure`	Total number of failed IAM DB authentication requests.
`IamDbAuthConnectionFailureI nvalidToken`	Total number of failed IAM DB authentication requests due to invalid token.
`IamDbAuthConnectionFailureI nsufficientPermissions`	Total number of failed IAM DB authentication requests due to incorrect policies or permissio ns.
`IamDbAuthConnectionFailureT hrottling`	Total number of failed IAM DB authentic ation requests due to IAM DB authentication throttling.
`IamDbAuthConnectionFailureS erverError`	Total number of failed IAM DB authentication requests due to an internal server error in the IAM DB authentication feature.

Common issues and solutions

You might encounter the following issues when using IAM DB authention. Use the remediation steps in the table to solve the issues:

Error	Metric(s)	Cause	Solution

`[ERROR] Failed to authenticate the connection request for user db_user because the provided token is malformed or otherwise invalid. (Status Code: 400, Error Code: InvalidToken)`	`IamDbAuthConnectionFailure`
	
	`IamDbAuthConnectionFailureInvalidToken`
		The IAM DB authentiation token in the connection request is either not a valid SigV4a token, or it is not formatted correctly.	Check your token generation strategy in your application. In some cases, make sure you are passing the token with valid formatting. Truncating the token (or incorrect string formatting) will make the token invalid.

`[ERROR] Failed to authenticate the connection request for user db_user because the token age is longer than 15 minutes. (Status Code: 400, Error Code:ExpiredToken)`	`IamDbAuthConnectionFailure`
	
	`IamDbAuthConnectionFailureInvalidToken`
		The IAM DB authentication token has expired. Tokens are only valid for 15 minutes.	Check your token caching and/or token re-use logic in your application. You should not re-use tokens that are older than 15 minutes.

`[ERROR] Failed to authorize the connection request for user`	`IamDbAuthConnectionFailure`	This error might be due to the following reasons:	Verify that the IAM role and/or policy you are assuming in your applicati

Error	Metric(s)	Cause	Solution
db_user because the IAM policy assumed by the caller 'arn:aws:sts::123456789012:assumed-role/ <RoleName>/ <RoleSession>' is not authorized to perform `rds-db:connect` on the DB instance. (Status Code: 403, Error Code:NotAuthorized)	IamDbAuthConnectionFailureInsufficientPermissions	• The IAM policy assumed by the application does not authorize the rds-db:connect action. • You are assuming the incorrect role/policy for *db_user* to connect to the database. • You are assuming the correct policy for *db_user*, but you are not connecting to the correct database.	on. Make sure you assume the same policy to generate the token as to connect to the DB.
[ERROR] Failed to authorize the connection request for user *db_user* due to IAM DB authentication throttling. (Status Code: 429, Error Code: ThrottlingException)	IamDbAuthConnectionFailure IamDbAuthConnectionFailureThrottling	You are making too many connection requests to your DB in a short amount of time.	Reduce the rate of establishing new connections with IAM authentication. Consider implementing connection pooling using RDS Proxy in order to reuse established connections in your application.

Error	Metric(s)	Cause	Solution

`[ERROR] Failed to authorize the connection request for user db_user due to an internal IAM DB authentication error. (Status Code: 500, Error Code: InternalError)`	`IamDbAuthConnectionFailure`
	
	`IamDbAuthConnectionFailureThrottling`
		There was an internal error while authorizing the DB connecito n with IAM DB authentication.	Reach out to http://www.amazonaws.cn/support-plans/ to investigate the issue.

Troubleshooting Amazon Aurora identity and access

Use the following information to help you diagnose and fix common issues that you might encounter when working with Aurora and IAM.

Topics

- I'm not authorized to perform an action in Aurora
- I'm not authorized to perform iam:PassRole
- I want to allow people outside of my Amazon account to access my Aurora resources

I'm not authorized to perform an action in Aurora

If the Amazon Web Services Management Console tells you that you're not authorized to perform an action, then you must contact your administrator for assistance. Your administrator is the person that provided you with your sign-in credentials.

The following example error occurs when the `mateojackson` user tries to use the console to view details about a *widget* but does not have `rds:GetWidget` permissions.

```
User: arn:aws-cn:iam::123456789012:user/mateojackson is not authorized to perform:
 rds:GetWidget on resource: my-example-widget
```

In this case, Mateo asks his administrator to update his policies to allow him to access the *my-example-widget* resource using the `rds:GetWidget` action.

I'm not authorized to perform iam:PassRole

If you receive an error that you're not authorized to perform the `iam:PassRole` action, then you must contact your administrator for assistance. Your administrator is the person that provided you with your sign-in credentials. Ask that person to update your policies to allow you to pass a role to Aurora.

Some Amazon services allow you to pass an existing role to that service, instead of creating a new service role or service-linked role. To do this, you must have permissions to pass the role to the service.

The following example error occurs when a user named `marymajor` tries to use the console to perform an action in Aurora. However, the action requires the service to have permissions granted by a service role. Mary does not have permissions to pass the role to the service.

```
User: arn:aws-cn:iam::123456789012:user/marymajor is not authorized to perform:
 iam:PassRole
```

In this case, Mary asks her administrator to update her policies to allow her to perform the `iam:PassRole` action.

I want to allow people outside of my Amazon account to access my Aurora resources

You can create a role that users in other accounts or people outside of your organization can use to access your resources. You can specify who is trusted to assume the role. For services that support resource-based policies or access control lists (ACLs), you can use those policies to grant people access to your resources.

To learn more, consult the following:

- To learn whether Aurora supports these features, see How Amazon Aurora works with IAM.
- To learn how to provide access to your resources across Amazon accounts that you own, see Providing access to an IAM user in another Amazon account that you own in the *IAM User Guide*.
- To learn how to provide access to your resources to third-party Amazon accounts, see Providing access to Amazon accounts owned by third parties in the *IAM User Guide*.

- To learn how to provide access through identity federation, see Providing access to externally authenticated users (identity federation) in the *IAM User Guide*.
- To learn the difference between using roles and resource-based policies for cross-account access, see How IAM roles differ from resource-based policies in the *IAM User Guide*.

Logging and monitoring in Amazon Aurora

Monitoring is an important part of maintaining the reliability, availability, and performance of Amazon Aurora and your Amazon solutions. You should collect monitoring data from all of the parts of your Amazon solution so that you can more easily debug a multi-point failure if one occurs. Amazon provides several tools for monitoring your Amazon Aurora resources and responding to potential incidents:

Amazon CloudWatch Alarms

Using Amazon CloudWatch alarms, you watch a single metric over a time period that you specify. If the metric exceeds a given threshold, a notification is sent to an Amazon SNS topic or Amazon Auto Scaling policy. CloudWatch alarms do not invoke actions because they are in a particular state. Rather the state must have changed and been maintained for a specified number of periods.

Amazon CloudTrail Logs

CloudTrail provides a record of actions taken by a user, role, or an Amazon service in Amazon Aurora. CloudTrail captures all API calls for Amazon Aurora as events, including calls from the console and from code calls to Amazon RDS API operations. Using the information collected by CloudTrail, you can determine the request that was made to Amazon Aurora, the IP address from which the request was made, who made the request, when it was made, and additional details. For more information, see Monitoring Amazon Aurora API calls in Amazon CloudTrail .

Enhanced Monitoring

Amazon Aurora provides metrics in real time for the operating system (OS) that your DB cluster runs on. You can view the metrics for your DB cluster using the console, or consume the Enhanced Monitoring JSON output from Amazon CloudWatch Logs in a monitoring system of your choice. For more information, see Monitoring OS metrics with Enhanced Monitoring .

Amazon RDS Performance Insights

Performance Insights expands on existing Amazon Aurora monitoring features to illustrate your database's performance and help you analyze any issues that affect it. With the Performance

Insights dashboard, you can visualize the database load and filter the load by waits, SQL statements, hosts, or users. For more information, see Monitoring DB load with Amazon CloudWatch Database Insights on Amazon Aurora .

Database Logs

You can view, download, and watch database logs using the Amazon Web Services Management Console, Amazon CLI, or RDS API. For more information, see Monitoring Amazon Aurora log files .

Amazon Aurora Recommendations

Amazon Aurora provides automated recommendations for database resources. These recommendations provide best practice guidance by analyzing DB cluster configuration, usage, and performance data. For more information, see Recommendations from Amazon Aurora .

Amazon Aurora Event Notification

Amazon Aurora uses the Amazon Simple Notification Service (Amazon SNS) to provide notification when an Amazon Aurora event occurs. These notifications can be in any notification form supported by Amazon SNS for an Amazon Region, such as an email, a text message, or a call to an HTTP endpoint. For more information, see Working with Amazon RDS event notification .

Amazon Trusted Advisor

Trusted Advisor draws upon best practices learned from serving hundreds of thousands of Amazon customers. Trusted Advisor inspects your Amazon environment and then makes recommendations when opportunities exist to save money, improve system availability and performance, or help close security gaps. All Amazon customers have access to five Trusted Advisor checks. Customers with a Business or Enterprise support plan can view all Trusted Advisor checks.

Trusted Advisor has the following Amazon Aurora-related checks:

- Amazon Aurora Idle DB Instances
- Amazon Aurora Security Group Access Risk
- Amazon Aurora Backups
- Amazon Aurora Multi-AZ
- Aurora DB Instance Accessibility

For more information on these checks, see Trusted Advisor best practices (checks).

Database activity streams

Database activity streams can protect your databases from internal threats by controlling DBA access to the database activity streams. Thus, the collection, transmission, storage, and subsequent processing of the database activity stream is beyond the access of the DBAs that manage the database. Database activity streams can provide safeguards for your database and meet compliance and regulatory requirements. For more information, seeMonitoring Amazon Aurora with Database Activity Streams .

For more information about monitoring Aurora see Monitoring metrics in an Amazon Aurora cluster .

Compliance validation for Amazon Aurora

Third-party auditors assess the security and compliance of Amazon Aurora as part of multiple Amazon compliance programs. These include SOC, PCI, FedRAMP, HIPAA, and others.

For a list of Amazon services in scope of specific compliance programs, see Amazon services in scope by compliance program. For general information, see Amazon compliance programs.

You can download third-party audit reports using Amazon Artifact. For more information, see Downloading reports in Amazon Artifact.

Your compliance responsibility when using Amazon Aurora is determined by the sensitivity of your data, your organization's compliance objectives, and applicable laws and regulations. Amazon provides the following resources to help with compliance:

- Security and compliance quick start guides – These deployment guides discuss architectural considerations and provide steps for deploying security- and compliance-focused baseline environments on Amazon.
- Architecting for HIPAA Security and Compliance on Amazon Web Services – This whitepaper describes how companies can use Amazon to create HIPAA-compliant applications.
- Amazon compliance resources – This collection of workbooks and guides that might apply to your industry and location.
- Amazon Config – This Amazon service assesses how well your resource configurations comply with internal practices, industry guidelines, and regulations.
- Amazon Security Hub CSPM – This Amazon Web Services service provides a comprehensive view of your security state within Amazon. Security Hub CSPM uses security controls to evaluate your Amazon resources and to check your compliance against security industry standards and best practices. For a list of supported services and controls, see Security Hub CSPM controls reference.

Resilience in Amazon Aurora

The Amazon global infrastructure is built around Amazon Regions and Availability Zones. Amazon Regions provide multiple physically separated and isolated Availability Zones, which are connected with low-latency, high-throughput, and highly redundant networking. With Availability Zones, you can design and operate applications and databases that automatically fail over between Availability Zones without interruption. Availability Zones are more highly available, fault tolerant, and scalable than traditional single or multiple data center infrastructures.

For more information about Amazon Regions and Availability Zones, see Amazon global infrastructure.

In addition to the Amazon global infrastructure, Aurora offers features to help support your data resiliency and backup needs.

Backup and restore

Aurora backs up your cluster volume automatically and retains restore data for the length of the *backup retention period*. Aurora backups are continuous and incremental so you can quickly restore to any point within the backup retention period. No performance impact or interruption of database service occurs as backup data is being written. You can specify a backup retention period, from 1 to 35 days, when you create or modify a DB cluster.

If you want to retain a backup beyond the backup retention period, you can also take a snapshot of the data in your cluster volume. Aurora retains incremental restore data for the entire backup retention period. Thus, you need to create a snapshot only for data that you want to retain beyond the backup retention period. You can create a new DB cluster from the snapshot.

You can recover your data by creating a new Aurora DB cluster from the backup data that Aurora retains, or from a DB cluster snapshot that you have saved. You can quickly create a new copy of a DB cluster from backup data to any point in time during your backup retention period. The continuous and incremental nature of Aurora backups during the backup retention period means you don't need to take frequent snapshots of your data to improve restore times.

For more information, see Backing up and restoring an Amazon Aurora DB cluster.

Replication

Aurora Replicas are independent endpoints in an Aurora DB cluster, best used for scaling read operations and increasing availability. Up to 15 Aurora Replicas can be distributed across the

Availability Zones that a DB cluster spans within an Amazon Region. The DB cluster volume is made up of multiple copies of the data for the DB cluster. However, the data in the cluster volume is represented as a single, logical volume to the primary DB instance and to Aurora Replicas in the DB cluster. If the primary DB instance fails, an Aurora Replica is promoted to be the primary DB instance.

Aurora also supports replication options that are specific to Aurora MySQL and Aurora PostgreSQL.

For more information, see Replication with Amazon Aurora.

Failover

Aurora stores copies of the data in a DB cluster across multiple Availability Zones in a single Amazon Region. This storage occurs regardless of whether the DB instances in the DB cluster span multiple Availability Zones. When you create Aurora Replicas across Availability Zones, Aurora automatically provisions and maintains them synchronously. The primary DB instance is synchronously replicated across Availability Zones to Aurora Replicas to provide data redundancy, eliminate I/O freezes, and minimize latency spikes during system backups. Running a DB cluster with high availability can enhance availability during planned system maintenance, and help protect your databases against failure and Availability Zone disruption.

For more information, see High availability for Amazon Aurora.

Infrastructure security in Amazon Aurora

As a managed service, Amazon Relational Database Service is protected by Amazon global network security. For information about Amazon security services and how Amazon protects infrastructure, see Amazon Cloud Security. To design your Amazon environment using the best practices for infrastructure security, see Infrastructure Protection in *Security Pillar Amazon Well-Architected Framework*.

You use Amazon published API calls to access Amazon RDS through the network. Clients must support the following:

- Transport Layer Security (TLS). We require TLS 1.2 and recommend TLS 1.3.
- Cipher suites with perfect forward secrecy (PFS) such as DHE (Ephemeral Diffie-Hellman) or ECDHE (Elliptic Curve Ephemeral Diffie-Hellman). Most modern systems such as Java 7 and later support these modes.

In addition, Aurora offers features to help support infrastructure security.

Security groups

Security groups control the access that traffic has in and out of a DB cluster. By default, network access is turned off to a DB cluster. You can specify rules in a security group that allow access from an IP address range, port, or security group. After ingress rules are configured, the same rules apply to all DB clusters that are associated with that security group.

For more information, see Controlling access with security groups.

Public accessibility

When you launch a DB instance inside a virtual private cloud (VPC) based on the Amazon VPC service, you can turn on or off public accessibility for that DB instance. To designate whether the DB instance that you create has a DNS name that resolves to a public IP address, you use the *Public accessibility* parameter. By using this parameter, you can designate whether there is public access to the DB instance. You can modify a DB instance to turn on or off public accessibility by modifying the *Public accessibility* parameter.

For more information, see Hiding a DB cluster in a VPC from the internet.

Note

If your DB instance is in a VPC but isn't publicly accessible, you can also use an Amazon Site-to-Site VPN connection or an Amazon Direct Connect connection to access it from a private network. For more information, see Internetwork traffic privacy.

Amazon RDS API and interface VPC endpoints (Amazon PrivateLink)

You can establish a private connection between your VPC and Amazon RDS API endpoints by creating an *interface VPC endpoint*. Interface endpoints are powered by Amazon PrivateLink.

Amazon PrivateLink enables you to privately access Amazon RDS API operations without an internet gateway, NAT device, VPN connection, or Amazon Direct Connect connection. DB instances in your VPC don't need public IP addresses to communicate with Amazon RDS API endpoints to launch, modify, or terminate DB instances and DB clusters. Your DB instances also don't need public IP addresses to use any of the available RDS API operations. Traffic between your VPC and Amazon RDS doesn't leave the Amazon network.

Each interface endpoint is represented by one or more elastic network interfaces in your subnets. For more information on elastic network interfaces, see Elastic network interfaces in the *Amazon EC2 User Guide.*

For more information about VPC endpoints, see Interface VPC endpoints (Amazon PrivateLink) in the *Amazon VPC User Guide*. For more information about RDS API operations, see Amazon RDS API Reference.

You don't need an interface VPC endpoint to connect to a DB cluster. For more information, see Scenarios for accessing a DB cluster in a VPC.

Considerations for VPC endpoints

Before you set up an interface VPC endpoint for Amazon RDS API endpoints, ensure that you review Interface endpoint properties and limitations in the *Amazon VPC User Guide*.

All RDS API operations relevant to managing Amazon Aurora resources are available from your VPC using Amazon PrivateLink.

VPC endpoint policies are supported for RDS API endpoints. By default, full access to RDS API operations is allowed through the endpoint. For more information, see Controlling access to services with VPC endpoints in the *Amazon VPC User Guide*.

Availability

Amazon RDS API currently supports VPC endpoints in the following Amazon Regions:

- US East (Ohio)
- US East (N. Virginia)
- US West (N. California)
- US West (Oregon)
- Africa (Cape Town)
- Asia Pacific (Hong Kong)
- Asia Pacific (Mumbai)
- Asia Pacific (New Zealand)
- Asia Pacific (Osaka)
- Asia Pacific (Seoul)
- Asia Pacific (Singapore)
- Asia Pacific (Sydney)
- Asia Pacific (Taipei)
- Asia Pacific (Thailand)
- Asia Pacific (Tokyo)
- Canada (Central)
- Canada West (Calgary)
- China (Beijing)
- China (Ningxia)
- Europe (Frankfurt)
- Europe (Zurich)
- Europe (Ireland)
- Europe (London)
- Europe (Paris)
- Europe (Stockholm)
- Europe (Milan)
- Israel (Tel Aviv)
- Mexico (Central)
- Middle East (Bahrain)

- South America (São Paulo)

Creating an interface VPC endpoint for Amazon RDS API

You can create a VPC endpoint for the Amazon RDS API using either the Amazon VPC console or the Amazon Command Line Interface (Amazon CLI). For more information, see Creating an interface endpoint in the *Amazon VPC User Guide*.

Create a VPC endpoint for Amazon RDS API using the service name `com.amazonaws.region.rds`.

Excluding Amazon Regions in China, if you enable private DNS for the endpoint, you can make API requests to Amazon RDS with the VPC endpoint using its default DNS name for the Amazon Region, for example `rds.us-east-1.amazonaws.com`. For the China (Beijing) and China (Ningxia) Amazon Regions, you can make API requests with the VPC endpoint using `rds-api.cn-north-1.amazonaws.com.cn` and `rds-api.cn-northwest-1.amazonaws.com.cn`, respectively.

For more information, see Accessing a service through an interface endpoint in the *Amazon VPC User Guide*.

Creating a VPC endpoint policy for Amazon RDS API

You can attach an endpoint policy to your VPC endpoint that controls access to Amazon RDS API. The policy specifies the following information:

- The principal that can perform actions.
- The actions that can be performed.
- The resources on which actions can be performed.

For more information, see Controlling access to services with VPC endpoints in the *Amazon VPC User Guide*.

Example: VPC endpoint policy for Amazon RDS API actions

The following is an example of an endpoint policy for Amazon RDS API. When attached to an endpoint, this policy grants access to the listed Amazon RDS API actions for all principals on all resources.

```
{
   "Statement":[
      {
         "Principal":"*",
         "Effect":"Allow",
         "Action":[
            "rds:CreateDBInstance",
            "rds:ModifyDBInstance",
            "rds:CreateDBSnapshot"
         ],
         "Resource":"*"
      }
   ]
}
```

Example: VPC endpoint policy that denies all access from a specified Amazon account

The following VPC endpoint policy denies Amazon account 123456789012 all access to resources using the endpoint. The policy allows all actions from other accounts.

```
{
  "Statement": [
    {
      "Action": "*",
      "Effect": "Allow",
      "Resource": "*",
      "Principal": "*"
    },
    {
      "Action": "*",
      "Effect": "Deny",
      "Resource": "*",
      "Principal": { "AWS": [ "123456789012" ] }
     }
   ]
}
```

Security best practices for Amazon Aurora

Use Amazon Identity and Access Management (IAM) accounts to control access to Amazon RDS API operations, especially operations that create, modify, or delete Amazon Aurora resources.

Such resources include DB clusters, security groups, and parameter groups. Also use IAM to control actions that perform common administrative actions such as backing up and restoring DB clusters.

- Create an individual user for each person who manages Amazon Aurora resources, including yourself. Don't use Amazon root credentials to manage Amazon Aurora resources.
- Grant each user the minimum set of permissions required to perform his or her duties.
- Use IAM groups to effectively manage permissions for multiple users.
- Rotate your IAM credentials regularly.
- Configure Amazon Secrets Manager to automatically rotate the secrets for Amazon Aurora. For more information, see Rotating your Amazon Secrets Manager secrets in the *Amazon Secrets Manager User Guide*. You can also retrieve the credential from Amazon Secrets Manager programmatically. For more information, see Retrieving the secret value in the *Amazon Secrets Manager User Guide*.

For more information about Amazon Aurora security, see Security in Amazon Aurora . For more information about IAM, see Amazon Identity and Access Management. For information on IAM best practices, see IAM best practices.

Amazon Security Hub CSPM uses security controls to evaluate resource configurations and security standards to help you comply with various compliance frameworks. For more information about using Security Hub CSPM to evaluate RDS resources, see Amazon Relational Database Service controls in the Amazon Security Hub User Guide.

You can monitor your usage of RDS as it relates to security best practices by using Security Hub CSPM. For more information, see What is Amazon Security Hub CSPM?.

Use the Amazon Web Services Management Console, the Amazon CLI, or the RDS API to change the password for your master user. If you use another tool, such as a SQL client, to change the master user password, it might result in privileges being revoked for the user unintentionally.

Amazon GuardDuty is a continuous security monitoring service that analyzes and processes various data sources, including Amazon RDS login activity. It uses threat intelligence feeds and machine learning to identify unexpected, potentially unauthorized, suspicious login behavior, and malicious activity within your Amazon environment.

When Amazon GuardDuty RDS Protection detects a potentially suspicious or anomalous login attempt that indicates a threat to your database, GuardDuty generates a new finding with details

about the potentially compromised database. For more information, see Monitoring threats with Amazon GuardDuty RDS Protectionfor Amazon Aurora .

Controlling access with security groups

VPC security groups control the access that traffic has in and out of a DB cluster. By default, network access is turned off for a DB cluster. You can specify rules in a security group that allow access from an IP address range, port, or security group. After ingress rules are configured, the same rules apply to all DB clusters that are associated with that security group. You can specify up to 20 rules in a security group.

Overview of VPC security groups

Each VPC security group rule makes it possible for a specific source to access a DB cluster in a VPC that is associated with that VPC security group. The source can be a range of addresses (for example, 203.0.113.0/24), or another VPC security group. By specifying a VPC security group as the source, you allow incoming traffic from all instances (typically application servers) that use the source VPC security group. VPC security groups can have rules that govern both inbound and outbound traffic. However, the outbound traffic rules typically don't apply to DB clusters. Outbound traffic rules apply only if the DB cluster acts as a client. You must use the Amazon EC2 API or the **Security Group** option on the VPC console to create VPC security groups.

When you create rules for your VPC security group that allow access to the clusters in your VPC, you must specify a port for each range of addresses that the rule allows access for. For example, if you want to turn on Secure Shell (SSH) access for instances in the VPC, create a rule allowing access to TCP port 22 for the specified range of addresses.

You can configure multiple VPC security groups that allow access to different ports for different instances in your VPC. For example, you can create a VPC security group that allows access to TCP port 80 for web servers in your VPC. You can then create another VPC security group that allows access to TCP port 3306 for Aurora MySQL DB instances in your VPC.

> **Note**
>
> In an Aurora DB cluster, the VPC security group associated with the DB cluster is also associated with all of the DB instances in the DB cluster. If you change the VPC security group for the DB cluster or for a DB instance, the change is applied automatically to all of the DB instances in the DB cluster.

For more information on VPC security groups, see Security groups in the *Amazon Virtual Private Cloud User Guide*.


> **Note**
>
> If your DB cluster is in a VPC but isn't publicly accessible, you can also use an Amazon Site-to-Site VPN connection or an Amazon Direct Connect connection to access it from a private network. For more information, see Internetwork traffic privacy .

Security group scenario

A common use of a DB cluster in a VPC is to share data with an application server running in an Amazon EC2 instance in the same VPC, which is accessed by a client application outside the VPC. For this scenario, you use the RDS and VPC pages on the Amazon Web Services Management Console or the RDS and EC2 API operations to create the necessary instances and security groups:

1. Create a VPC security group (for example, `sg-0123ec2example`) and define inbound rules that use the IP addresses of the client application as the source. This security group allows your client application to connect to EC2 instances in a VPC that uses this security group.
2. Create an EC2 instance for the application and add the EC2 instance to the VPC security group (`sg-0123ec2example`) that you created in the previous step.
3. Create a second VPC security group (for example, `sg-6789rdsexample`) and create a new rule by specifying the VPC security group that you created in step 1 (`sg-0123ec2example`) as the source.
4. Create a new DB cluster and add the DB cluster to the VPC security group (`sg-6789rdsexample`) that you created in the previous step. When you create the DB cluster, use the same port number as the one specified for the VPC security group (`sg-6789rdsexample`) rule that you created in step 3.

The following diagram shows this scenario.

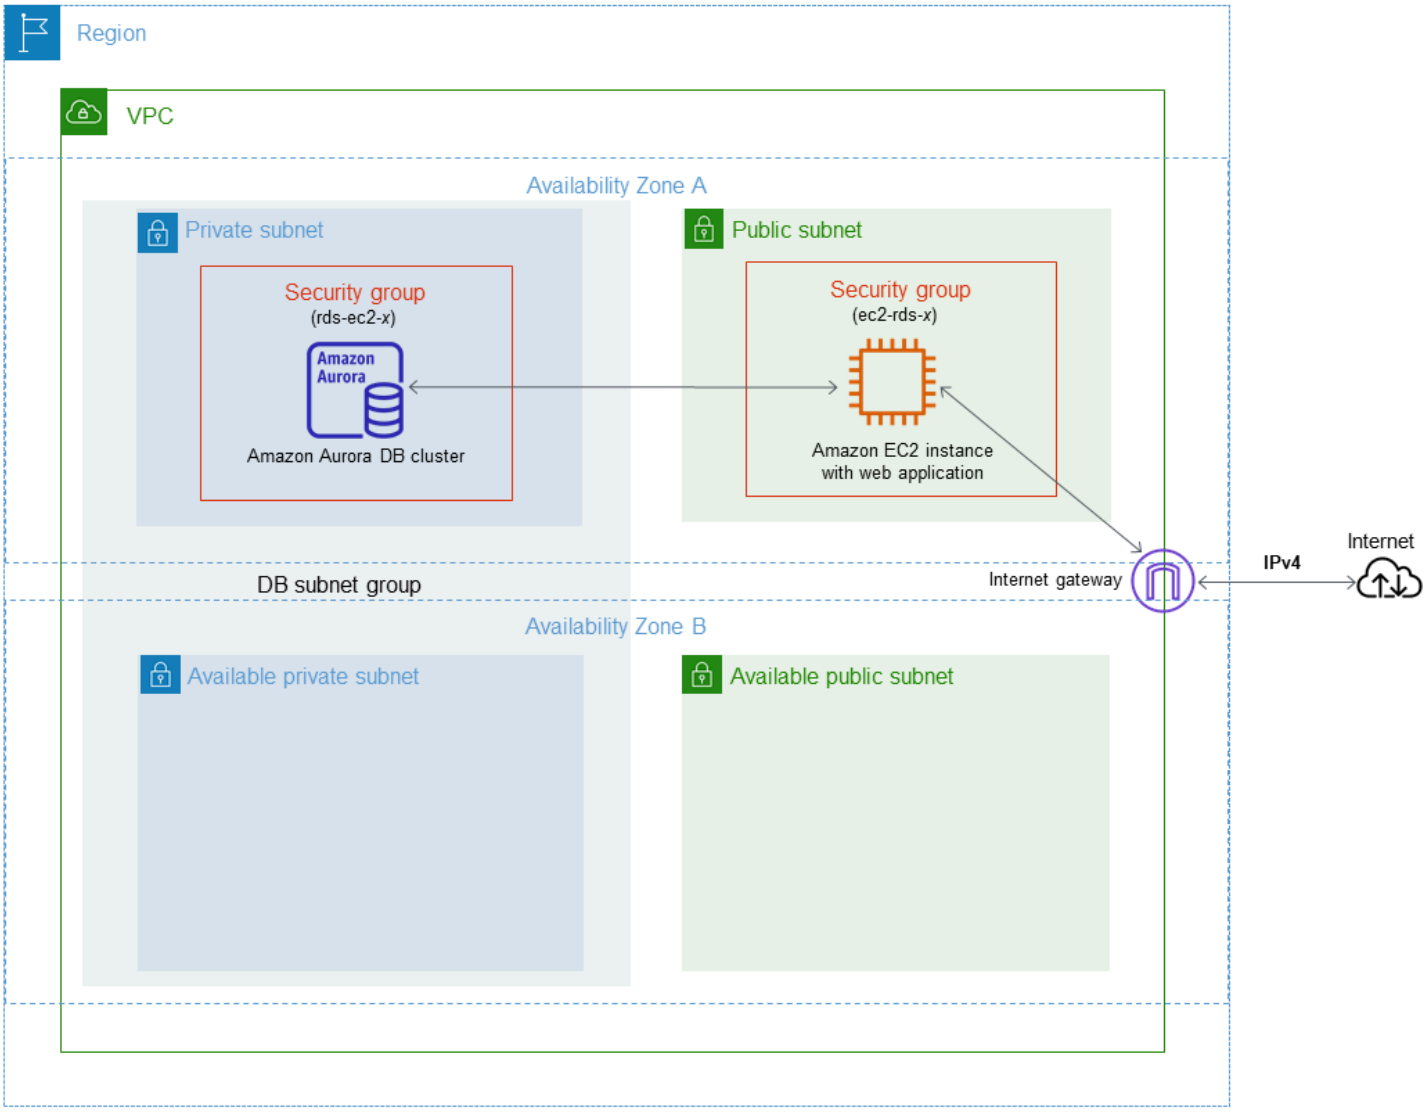

For detailed instructions about configuring a VPC for this scenario, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only) . For more information about using a VPC, see Amazon VPC and Amazon Aurora .

Creating a VPC security group

You can create a VPC security group for a DB instance by using the VPC console. For information about creating a security group, see Provide access to the DB cluster in the VPC by creating a security group and Security groups in the *Amazon Virtual Private Cloud User Guide*.

Associating a security group with a DB cluster

You can associate a security group with a DB cluster by using **Modify cluster** on the RDS console, the `ModifyDBCluster` Amazon RDS API, or the `modify-db-cluster` Amazon CLI command.

The following CLI example associates a specific VPC group and removes DB security groups from the DB cluster

```
aws rds modify-db-cluster --db-cluster-identifier dbName --vpc-security-group-ids sg-ID
```

For information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster .

Master user account privileges

When you create a new DB cluster, the default master user that you use gets certain privileges for that DB cluster. You can't change the master user name after the DB cluster is created.

Important

We strongly recommend that you do not use the master user directly in your applications. Instead, adhere to the best practice of using a database user created with the minimal privileges required for your application.

Note

If you accidentally delete the permissions for the master user, you can restore them by modifying the DB cluster and setting a new master user password. For more information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster .

The following table shows the privileges and database roles the master user gets for each of the database engines.

Database engine	System privilege	Database role
Aurora MySQL	Version 2: ALTER,ALTER ROUTINE, CREATE,CREATE ROUTINE,CREATE TEMPORARY TABLES,CREATE USER,CREATE VIEW,DELETE,DROP, EVENT,EXECUTE,GRANT OPTION,INDEX,INSERT, LOAD FROM S3,LOCK TABLES, PROCESS,REFERENCES , RELOAD,REPLICATI ON CLIENT , REPLICATION SLAVE ,SELECT, SELECT INTO S3,SHOW DATABASES , SHOW VIEW,TRIGGER, UPDATE	—
	Version 3: ALTER,APPLICATION_PASSWORD_ADMIN , ALTER ROUTINE,CONNECTION_ADMIN , CREATE,CREATE ROLE,CREATE ROUTINE,CREATE TEMPORARY TABLES, CREATE USER,CREATE VIEW, DELETE,DROP,DROP ROLE, EVENT,EXECUTE,INDEX, INSERT,LOCK TABLES, PROCESS,REFERENCES , RELOAD,REPLICATION CLIENT , REPLICATI ON SLAVE ,ROLE_ADMIN , SET_USER_ ID ,SELECT,SHOW DATABASES ,SHOW VIEW,TRIGGER, UPDATE,XA_RECOVER_ADMIN Starting with Aurora MySQL version 3.04.0, the master user also gets the SHOW_ROUTINE privilege . Starting with Aurora MySQL version 3.09.0, the master user also gets the FLUSH_OPTIMIZER_CO STS ,FLUSH_STATUS ,FLUSH_TABLES , and FLUSH_USER_RESOURCES privileges.	rds_superuser_role For more information about rds_superuser_role, see Role-based privilege model .
	Version 8.4:	rds_superuser_role

Database engine	System privilege	Database role
	ALTER,ALLOW_NONEXISTENT_DEFINER , APPLICATION_PASSWORD_ADMIN , ALTER ROUTINE,CONNECTION_ADMIN , CREATE,CREATE ROLE,CREATE ROUTINE,CREATE TEMPORARY TABLES, CREATE USER,CREATE VIEW, DELETE,DROP,DROP ROLE, EVENT,EXECUTE, FLUSH_OPTIMIZER_COSTS ,FLUSH_PRI VILEGES , FLUSH_STATUS ,FLUSH_TABLES , FLUSH_USER_RESOURCES , INDEX,INSERT, LOCK TABLES,OPTIMIZE_LOCAL_TABLE , PROCESS,REFERENCES , RELOAD,REPLICATION CLIENT, REPLICATION SLAVE ,ROLE_ADMIN , SELECT,SET_ANY_DEFINER , SHOW DATABASES ,SHOW_ROUTINE , SHOW VIEW,TRIGGER, UPDATE,XA_RECOVER_ADMIN	For more information about rds_superuser_role, see Role-based privilege model .
Aurora PostgreSQL	LOGIN,NOSUPERUSER , INHERIT,CREATEDB, CREATEROLE ,NOREPLICATION ,VALID UNTIL 'infinity'	RDS_SUPERUSER For more information about RDS_SUPERUSER, see Understanding PostgreSQL roles and permissions .

Using service-linked roles for Amazon Aurora

Amazon Aurora uses Amazon Identity and Access Management (IAM) service-linked roles. A service-linked role is a unique type of IAM role that is linked directly to Amazon Aurora. Service-linked roles are predefined by Amazon Aurora and include all the permissions that the service requires to call other Amazon services on your behalf.

A service-linked role makes using Amazon Aurora easier because you don't have to manually add the necessary permissions. Amazon Aurora defines the permissions of its service-linked roles, and unless defined otherwise, only Amazon Aurora can assume its roles. The defined permissions include the trust policy and the permissions policy, and that permissions policy cannot be attached to any other IAM entity.

You can delete the roles only after first deleting their related resources. This protects your Amazon Aurora resources because you can't inadvertently remove permission to access the resources.

For information about other services that support service-linked roles, see Amazon services that work with IAM and look for the services that have **Yes** in the **Service-Linked Role** column. Choose a **Yes** with a link to view the service-linked role documentation for that service.

Service-linked role permissions for Amazon Aurora

Amazon Aurora uses the service-linked role named AWSServiceRoleForRDS to allow Amazon RDS to call Amazon services on behalf of your DB clusters.

The AWSServiceRoleForRDS service-linked role trusts the following services to assume the role:

- `rds.amazonaws.com`

This service-linked role has a permissions policy attached to it called `AmazonRDSServiceRolePolicy` that grants it permissions to operate in your account.

For more information about this policy, including the JSON policy document, see AmazonRDSServiceRolePolicy in the *Amazon Managed Policy Reference Guide*.

> **Note**
>
> You must configure permissions to allow an IAM entity (such as a user, group, or role) to create, edit, or delete a service-linked role. If you encounter the following error message:

Unable to create the resource. Verify that you have permission to create service linked role. Otherwise wait and try again later.
Make sure you have the following permissions enabled:

```
{
    "Action": "iam:CreateServiceLinkedRole",
    "Effect": "Allow",
    "Resource": "arn:aws-cn:iam::*:role/aws-service-role/rds.amazonaws.com/
AWSServiceRoleForRDS",
    "Condition": {
        "StringLike": {
            "iam:AWSServiceName":"rds.amazonaws.com"
        }
    }
}
```

For more information, see Service-linked role permissions in the *IAM User Guide*.

Creating a service-linked role for Amazon Aurora

You don't need to manually create a service-linked role. When you create a DB cluster, Amazon Aurora creates the service-linked role for you.

Important

If you were using the Amazon Aurora service before December 1, 2017, when it began supporting service-linked roles, then Amazon Aurora created the AWSServiceRoleForRDS role in your account. To learn more, see A new role appeared in my Amazon account.

If you delete this service-linked role, and then need to create it again, you can use the same process to recreate the role in your account. When you create a DB cluster, Amazon Aurora creates the service-linked role for you again.

Editing a service-linked role for Amazon Aurora

Amazon Aurora does not allow you to edit the AWSServiceRoleForRDS service-linked role. After you create a service-linked role, you cannot change the name of the role because various entities

might reference the role. However, you can edit the description of the role using IAM. For more information, see Editing a service-linked role in the *IAM User Guide*.

Deleting a service-linked role for Amazon Aurora

If you no longer need to use a feature or service that requires a service-linked role, we recommend that you delete that role. That way you don't have an unused entity that is not actively monitored or maintained. However, you must delete all of your DB clusters before you can delete the service-linked role.

Cleaning up a service-linked role

Before you can use IAM to delete a service-linked role, you must first confirm that the role has no active sessions and remove any resources used by the role.

To check whether the service-linked role has an active session in the IAM console

1. Sign in to the Amazon Web Services Management Console and open the IAM console at https://console.amazonaws.cn/iam/.
2. In the navigation pane of the IAM console, choose **Roles**. Then choose the name (not the check box) of the AWSServiceRoleForRDS role.
3. On the **Summary** page for the chosen role, choose the **Last Accessed** tab.
4. On the **Last Accessed** tab, review recent activity for the service-linked role.

> **Note**
>
> If you are unsure whether Amazon Aurora is using the AWSServiceRoleForRDS role, you can try to delete the role. If the service is using the role, then the deletion fails and you can view the Amazon Regions where the role is being used. If the role is being used, then you must wait for the session to end before you can delete the role. You cannot revoke the session for a service-linked role.

If you want to remove the AWSServiceRoleForRDS role, you must first delete *all* of your DB clusters.

Deleting all of your clusters

Use one of the following procedures to delete a single cluster. Repeat the procedure for each of your clusters.

To delete a cluster (console)

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the **Databases** list, choose the cluster that you want to delete.
3. For **Cluster Actions**, choose **Delete**.
4. Choose **Delete**.

To delete a cluster (CLI)

See `delete-db-cluster` in the *Amazon CLI Command Reference*.

To delete a cluster (API)

See `DeleteDBCluster` in the *Amazon RDS API Reference*.

You can use the IAM console, the IAM CLI, or the IAM API to delete the AWSServiceRoleForRDS service-linked role. For more information, see Deleting a service-linked role in the *IAM User Guide*.

Service-linked role permissions for Amazon RDS Beta

Amazon Aurora uses the service-linked role named `AWSServiceRoleForRDSBeta` to allow Amazon Aurora to call Amazon services on behalf of your RDS DB resources.

The AWSServiceRoleForRDSBeta service-linked role trusts the following services to assume the role:

- `rds.amazonaws.com`

This service-linked role has a permissions policy attached to it called `AmazonRDSBetaServiceRolePolicy` that grants it permissions to operate in your account. For more information, see Amazon managed policy: AmazonRDSBetaServiceRolePolicy.

> **Note**
>
> You must configure permissions to allow an IAM entity (such as a user, group, or role) to create, edit, or delete a service-linked role. If you encounter the following error message: **Unable to create the resource. Verify that you have permission to create service linked role. Otherwise wait and try again later.**
> Make sure you have the following permissions enabled:

```
{
    "Action": "iam:CreateServiceLinkedRole",
    "Effect": "Allow",
    "Resource": "arn:aws-cn:iam::*:role/aws-service-role/
custom.rds.amazonaws.com/AmazonRDSBetaServiceRolePolicy",
    "Condition": {
        "StringLike": {
            "iam:AWSServiceName":"custom.rds.amazonaws.com"
        }
    }
}
```

For more information, see Service-linked role permissions in the *IAM User Guide*.

Service-linked role for Amazon RDS Preview

Amazon Aurora uses the service-linked role named `AWSServiceRoleForRDSPreview` to allow Amazon Aurora to call Amazon services on behalf of your RDS DB resources.

The AWSServiceRoleForRDSPreview service-linked role trusts the following services to assume the role:

- `rds.amazonaws.com`

This service-linked role has a permissions policy attached to it called `AmazonRDSPreviewServiceRolePolicy` that grants it permissions to operate in your account. For more information, see Amazon managed policy: AmazonRDSPreviewServiceRolePolicy.

Note

You must configure permissions to allow an IAM entity (such as a user, group, or role) to create, edit, or delete a service-linked role. If you encounter the following error message: **Unable to create the resource. Verify that you have permission to create service linked role. Otherwise wait and try again later.**
Make sure you have the following permissions enabled:

```
{
```

```
    "Action": "iam:CreateServiceLinkedRole",
    "Effect": "Allow",
    "Resource": "arn:aws-cn:iam::*:role/aws-service-role/
custom.rds.amazonaws.com/AmazonRDSPreviewServiceRolePolicy",
    "Condition": {
        "StringLike": {
            "iam:AWSServiceName":"custom.rds.amazonaws.com"
        }
    }
}
```

For more information, see Service-linked role permissions in the *IAM User Guide*.

Amazon VPC and Amazon Aurora

Amazon Virtual Private Cloud (Amazon VPC) makes it possible for you to launch Amazon resources, such as Aurora DB clusters, into a virtual private cloud (VPC).

When you use a VPC, you have control over your virtual networking environment. You can choose your own IP address range, create subnets, and configure routing and access control lists. There is no additional cost to run your DB cluster in a VPC.

Accounts have a default VPC. All new DB clusters are created in the default VPC unless you specify otherwise.

Topics

- Working with a DB cluster in a VPC
- Scenarios for accessing a DB cluster in a VPC
- Tutorial: Create a VPC for use with a DB cluster (IPv4 only)
- Tutorial: Create a VPC for use with a DB cluster (dual-stack mode)

Following, you can find a discussion about VPC functionality relevant to Amazon Aurora DB clusters. For more information about Amazon VPC, see Amazon VPC Getting Started Guide and Amazon VPC User Guide.

Working with a DB cluster in a VPC

Your DB cluster is in a virtual private cloud (VPC). A VPC is a virtual network that is logically isolated from other virtual networks in the Amazon Cloud. Amazon VPC makes it possible for you to launch Amazon resources, such as an Amazon Aurora DB cluster or Amazon EC2 instance, into a VPC. The VPC can either be a default VPC that comes with your account or one that you create. All VPCs are associated with your Amazon account.

Your default VPC has three subnets that you can use to isolate resources inside the VPC. The default VPC also has an internet gateway that can be used to provide access to resources inside the VPC from outside the VPC.

For a list of scenarios involving Amazon Aurora DB clusters in a VPC , see Scenarios for accessing a DB cluster in a VPC.

Topics

- Working with a DB cluster in a VPC
- VPC encryption control
- Working with DB subnet groups
- Shared subnets
- Amazon Aurora IP addressing
- Hiding a DB cluster in a VPC from the internet
- Creating a DB cluster in a VPC

In the following tutorials, you can learn to create a VPC that you can use for a common Amazon Aurora scenario:

- Tutorial: Create a VPC for use with a DB cluster (IPv4 only)
- Tutorial: Create a VPC for use with a DB cluster (dual-stack mode)

Working with a DB cluster in a VPC

Here are some tips on working with a DB cluster in a VPC:

- Your VPC must have at least two subnets. These subnets must be in two different Availability Zones in the Amazon Web Services Region where you want to deploy your DB cluster. A *subnet* is a segment of a VPC's IP address range that you can specify and that you can use to group DB clusters based on your security and operational needs.
- If you want your DB cluster in the VPC to be publicly accessible, make sure to turn on the VPC attributes *DNS hostnames* and *DNS resolution*.
- Your VPC must have a DB subnet group that you create. You create a DB subnet group by specifying the subnets you created. Amazon Aurora chooses a subnet and an IP address within that subnet to associate with the primary DB instance in your DB cluster. The primary DB instance uses the Availability Zone that contains the subnet.
- Your VPC must have a VPC security group that allows access to the DB cluster.

  For more information, see Scenarios for accessing a DB cluster in a VPC.
- The CIDR blocks in each of your subnets must be large enough to accommodate spare IP addresses for Amazon Aurora to use during maintenance activities, including failover and compute scaling. For example, a range such as 10.0.0.0/24 and 10.0.1.0/24 is typically large enough.

- A VPC can have an *instance tenancy* attribute of either *default* or *dedicated*. All default VPCs have the instance tenancy attribute set to default, and a default VPC can support any DB instance class.

  If you choose to have your DB cluster in a dedicated VPC where the instance tenancy attribute is set to dedicated, the DB instance class of your DB cluster must be one of the approved Amazon EC2 dedicated instance types. For example, the r5.large EC2 dedicated instance corresponds to the db.r5.large DB instance class. For information about instance tenancy in a VPC, see Dedicated instances in the *Amazon Elastic Compute Cloud User Guide*.

  > **Note**
  >
  > When you set the instance tenancy attribute to dedicated for a DB cluster, it doesn't guarantee that the DB cluster will run on a dedicated host.

VPC encryption control

VPC encryption controls allow you to enforce encryption-in-transit for all network traffic within your VPCs. Use encryption control to meet regulatory compliance requirements by ensuring that only encryption-capable Nitro-based hardware can be provisioned in designated VPCs. Encryption control also catches compatibility issues at API request time rather than during provisioning. Your existing workloads continue operating and only new incompatible requests are blocked.

Set your VPC encryption controls by setting the VPC control mode to :

- *disabled* (default)
- *monitor*
- *enforced*

To check the current control mode for your VPC, use the Amazon Web Services Management Console or DescribeVpcs CLI or API command.

If your VPC enforces encryption, you can only provision Nitro-based DB clusters that support encryption in transit in that VPC. For more information see, DB instance class types. For information about Nitro instances, see Instances built on the Amazon Nitro System in the *Amazon EC2 User Guide*.

> **Note**
>
> If you try to provision incompatible DB clusters in an encryption-enforced VPC, Aurora returns a `VpcEncryptionControlViolationException` exception.

For Aurora Serverless for MySQL and PostreSQL, encryption control requires platform version 3 or higher.

Working with DB subnet groups

Subnets are segments of a VPC's IP address range that you designate to group your resources based on security and operational needs. A *DB subnet group* is a collection of subnets (typically private) that you create in a VPC and that you then designate for your DB clusters. By using a DB subnet group, you can specify a particular VPC when creating DB clusters using the Amazon CLI or RDS API. If you use the console, you can choose the VPC and subnet groups you want to use.

Each DB subnet group should have subnets in at least two Availability Zones in a given Amazon Web Services Region. When creating a DB cluster in a VPC, you choose a DB subnet group for it. From the DB subnet group, Amazon Aurora chooses a subnet and an IP address within that subnet to associate with the primary DB instance in your DB cluster. The DB uses the Availability Zone that contains the subnet. Aurora assigns an IP address from a subnet that has free IP address space.

The subnets in a DB subnet group are either public or private. The subnets are public or private, depending on the configuration that you set for their network access control lists (network ACLs) and routing tables. For a DB cluster to be publicly accessible, all of the subnets in its DB subnet group must be public. If a subnet that's associated with a publicly accessible DB cluster changes from public to private, it can affect DB cluster availability.

To create a DB subnet group that supports dual-stack mode, make sure that each subnet that you add to the DB subnet group has an Internet Protocol version 6 (IPv6) CIDR block associated with it. For more information, see Amazon Aurora IP addressing and Migrating to IPv6 in the *Amazon VPC User Guide.*

When Amazon Aurora creates a DB cluster in a VPC, it assigns a network interface to your DB cluster by using an IP address from your DB subnet group. However, we strongly recommend that you use the Domain Name System (DNS) name to connect to your DB cluster. We recommend this because the underlying IP address changes during failover.

Note

For each DB cluster that you run in a VPC, make sure to reserve at least one address in each subnet in the DB subnet group for use by Amazon Aurora for recovery actions.

Shared subnets

You can create a DB cluster in a shared VPC.

Some considerations to keep in mind while using shared VPCs:

- You can move a DB cluster from a shared VPC subnet to a non-shared VPC subnet and vice-versa.
- Participants in a shared VPC must create a security group in the VPC to allow them to create a DB cluster.
- Owners and participants in a shared VPC can access the database by using SQL queries. However, only the creator of a resource can make any API calls on the resource.

Amazon Aurora IP addressing

IP addresses enable resources in your VPC to communicate with each other, and with resources over the internet. Amazon Aurora supports both IPv4 and IPv6 addressing protocols. By default, Amazon Aurora and Amazon VPC use the IPv4 addressing protocol. You can't turn off this behavior. When you create a VPC, make sure to specify an IPv4 CIDR block (a range of private IPv4 addresses). You can optionally assign an IPv6 CIDR block to your VPC and subnets, and assign IPv6 addresses from that block to DB clusters in your subnet.

Support for the IPv6 protocol expands the number of supported IP addresses. By using the IPv6 protocol, you ensure that you have sufficient available addresses for the future growth of the internet. New and existing RDS resources can use IPv4 and IPv6 addresses within your VPC. Configuring, securing, and translating network traffic between the two protocols used in different parts of an application can cause operational overhead. You can standardize on the IPv6 protocol for Amazon RDS resources to simplify your network configuration.

Topics

- IPv4 addresses
- IPv6 addresses

- Dual-stack mode

IPv4 addresses

When you create a VPC, you must specify a range of IPv4 addresses for the VPC in the form of a CIDR block, such as `10.0.0.0/16`. A *DB subnet group* defines the range of IP addresses in this CIDR block that a DB cluster can use. These IP addresses can be private or public.

A private IPv4 address is an IP address that's not reachable over the internet. You can use private IPv4 addresses for communication between your DB cluster and other resources, such as Amazon EC2 instances, in the same VPC. Each DB cluster has a private IP address for communication in the VPC.

A public IP address is an IPv4 address that's reachable from the internet. You can use public addresses for communication between your DB cluster and resources on the internet, such as a SQL client. You control whether your DB cluster receives a public IP address.

Amazon RDS uses Public Elastic IPv4 addresses from EC2's public IPv4 address pool for publicly accessible database instances. These IP addresses are visible in your Amazon account when using the `describe-addresses` CLI, API or viewing the Elastic IPs (EIP) section in the Amazon Web Services Management Console. Each RDS-managed IP address is marked with a `service_managed` attribute set to `"rds"`.

While these IPs are visible in your account, they remain fully managed by Amazon RDS and cannot be modified or released. Amazon RDS releases IPs back into the public IPv4 address pool when no longer in use.

CloudTrail logs API calls related to RDS's EIP, such as the `AllocateAddress`. These API calls are invoked by the Service Principal `rds.amazonaws.com`.

> **Note**
>
> IPs allocated by Amazon RDS do not count against your account's EIP limits.

For a tutorial that shows you how to create a VPC with only private IPv4 addresses that you can use for a common Amazon Aurora scenario, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only).

IPv6 addresses

You can optionally associate an IPv6 CIDR block with your VPC and subnets, and assign IPv6 addresses from that block to the resources in your VPC. Each IPv6 address is globally unique.

The IPv6 CIDR block for your VPC is automatically assigned from Amazon's pool of IPv6 addresses. You can't choose the range yourself.

When connecting to an IPv6 address, make sure that the following conditions are met:

- The client is configured so that client to database traffic over IPv6 is allowed.
- RDS security groups used by the DB instance are configured correctly so that client to database traffic over IPv6 is allowed.
- The client operating system stack allows traffic on the IPv6 address, and operating system drivers and libraries are configured to choose the correct default DB instance endpoint (either IPv4 or IPv6).

For more information about IPv6, see IP Addressing in the *Amazon VPC User Guide*.

Dual-stack mode

A DB cluster runs in dual-stack mode when it can communicate over both IPv4 and IPv6 addressing protocols. Resources can then communicate with the DB cluster using either IPv4, IPv6, or both protocols. Private dual-stack mode DB instances have IPv6 endpoints that RDS restricts to VPC access only, ensuring your IPv6 endpoints remain private. Public dual-stack mode DB instances provide both IPv4 and IPv6 endpoints that you can access from the internet.

Topics

- Dual-stack mode and DB subnet groups
- Working with dual-stack mode DB instances
- Modifying IPv4-only DB clusters to use dual-stack mode
- Availability of dual-stack network DB clusters
- Limitations for dual-stack network DB clusters

For a tutorial that shows you how to create a VPC with both IPv4 and IPv6 addresses that you can use for a common Amazon Aurora scenario, see Tutorial: Create a VPC for use with a DB cluster (dual-stack mode).

Dual-stack mode and DB subnet groups

To use dual-stack mode, make sure that each subnet in the DB subnet group that you associate with the DB cluster has an IPv6 CIDR block associated with it. You can create a new DB subnet group or modify an existing DB subnet group to meet this requirement. After a DB cluster is in dual-stack mode, clients can connect to it normally. Make sure that client security firewalls and RDS DB instance security groups are accurately configured to allow traffic over IPv6. To connect, clients use the DB cluster primary instance's endpoint. Client applications can specify which protocol is preferred when connecting to a database. In dual-stack mode, the DB cluster detects the client's preferred network protocol, either IPv4 or IPv6, and uses that protocol for the connection.

If a DB subnet group stops supporting dual-stack mode because of subnet deletion or CIDR disassociation, there's a risk of an incompatible network state for DB instances that are associated with the DB subnet group. Also, you can't use the DB subnet group when you create a new dual-stack mode DB cluster.


To determine whether a DB subnet group supports dual-stack mode by using the Amazon Web Services Management Console, view the **Network type** on the details page of the DB subnet group. To determine whether a DB subnet group supports dual-stack mode by using the Amazon CLI, run the describe-db-subnet-groups command and view `SupportedNetworkTypes` in the output.

Read replicas are treated as independent DB instances and can have a network type that's different from the primary DB instance. If you change the network type of a read replica's primary DB instance, the read replica isn't affected. When you are restoring a DB instance, you can restore it to any network type that's supported.

Working with dual-stack mode DB instances

When you create or modify a DB cluster, you can specify dual-stack mode to allow your resources to communicate with your DB cluster over IPv4, IPv6, or both.

When you use the Amazon Web Services Management Console to create or modify a DB instance, you can specify dual-stack mode in the **Network type** section. The following image shows the **Network type** section in the console.

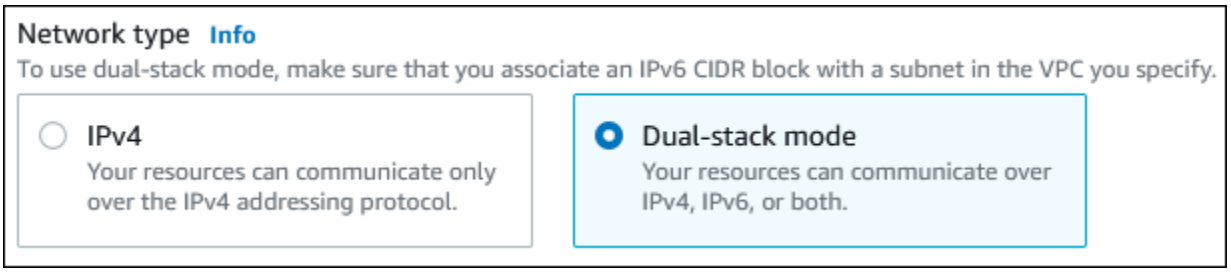

When you use the Amazon CLI to create or modify a DB cluster, set the `--network-type` option to `DUAL` to use dual-stack mode. When you use the RDS API to create or modify a DB cluster, set the `NetworkType` parameter to `DUAL` to use dual-stack mode. When you are modifying the network type of a DB instance, downtime is possible. If dual-stack mode isn't supported by the specified DB engine version or DB subnet group, the `NetworkTypeNotSupported` error is returned.

For more information about creating a DB cluster, see Creating an Amazon Aurora DB cluster. For more information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

To determine whether a DB cluster is in dual-stack mode by using the console, view the **Network type** on the **Connectivity & security** tab for the DB cluster.

Modifying IPv4-only DB clusters to use dual-stack mode

You can modify an IPv4-only DB cluster to use dual-stack mode. To do so, change the network type of the DB cluster. The modification might result in downtime.

It is recommended that you change the network type of your Amazon Aurora DB clusters during a maintenance window. Currently, setting the network type of new instances to dual-stack mode isn't supported. You can set network type manually by using the `modify-db-cluster` command.

Before modifying a DB cluster to use dual-stack mode, make sure that its DB subnet group supports dual-stack mode. If the DB subnet group associated with the DB cluster doesn't support dual-stack mode, specify a different DB subnet group that supports it when you modify the DB cluster. Modifying the DB subnet group of a DB cluster can cause downtime.

If you modify the DB subnet group of a DB cluster before you change the DB cluster to use dual-stack mode, make sure that the DB subnet group is valid for the DB cluster before and after the change.

We recommend that you run the modify-db-cluster API with only the `--network-type` parameter with value `DUAL` to change the network of an Amazon Aurora cluster to dual-stack mode. Adding other parameters along with the `--network-type` parameter in the same API call could result in downtime.

If you can't connect to the DB cluster after the change, make sure that the client and database security firewalls and route tables are accurately configured to allow traffic to the database on the selected network (either IPv4 or IPv6). You might also need to modify operating system parameter, libraries, or drivers to connect using an IPv6 address.

To modify an IPv4-only DB cluster to use dual-stack mode

1. Modify a DB subnet group to support dual-stack mode, or create a DB subnet group that supports dual-stack mode:

   a. Associate an IPv6 CIDR block with your VPC.

      For instructions, see Add an IPv6 CIDR block to your VPC in the *Amazon VPC User Guide*.

   b. Attach the IPv6 CIDR block to all of the subnets in your the DB subnet group.

      For instructions, see Add an IPv6 CIDR block to your subnet in the *Amazon VPC User Guide*.

   c. Confirm that the DB subnet group supports dual-stack mode.

      If you are using the Amazon Web Services Management Console, select the DB subnet group, and make sure that the **Supported network types** value is **Dual, IPv4**.

      If you are using the Amazon CLI, run the describe-db-subnet-groups command, and make sure that the `SupportedNetworkType` value for the DB instance is `Dual, IPv4`.


2. Modify the security group associated with the DB cluster to allow IPv6 connections to the database, or create a new security group that allows IPv6 connections.

   For instructions, see Security group rules in the *Amazon VPC User Guide*.

3. Modify the DB cluster to support dual-stack mode. To do so, set the **Network type** to **Dual-stack mode**.

   If you are using the console, make sure that the following settings are correct:

   - **Network type** – **Dual-stack mode**

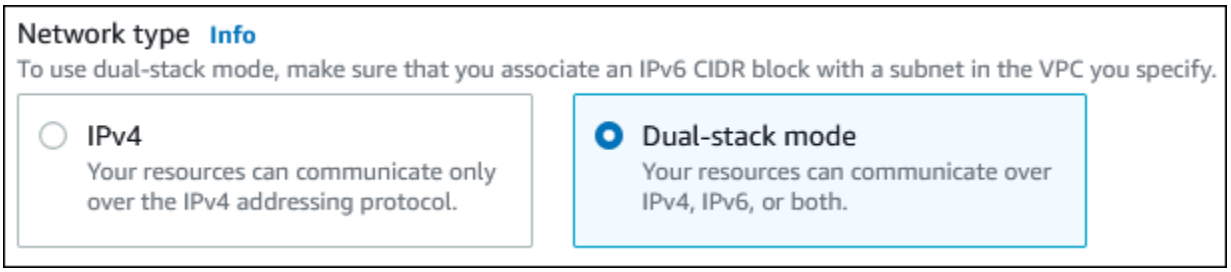   - **DB subnet group** – The DB subnet group that you configured in a previous step
   - **Security group** – The security that you configured in a previous step

If you are using the Amazon CLI, make sure that the following settings are correct:

- `--network-type` – `dual`
- `--db-subnet-group-name` – The DB subnet group that you configured in a previous step
- `--vpc-security-group-ids` – The VPC security group that you configured in a previous step

For example:

```
aws rds modify-db-cluster --db-cluster-identifier my-cluster --network-type "DUAL"
```

4. Confirm that the DB cluster supports dual-stack mode.

   If you are using the console, choose the **Configuration** tab for the DB cluster. On that tab, make sure that the **Network type** value is **Dual-stack mode**.

   If you are using the Amazon CLI, run the describe-db-clusters command, and make sure that the `NetworkType` value for the DB cluster is `dual`.

   Run the `dig` command on the writer DB instance endpoint to identify the IPv6 address associated with it.

   ```
   dig db-instance-endpoint AAAA
   ```

   Use the writer DB instance endpoint, not the IPv6 address, to connect to the DB cluster.

Availability of dual-stack network DB clusters

Dual-stack network DB clusters are available in all Amazon Web Services Regions except for the following:

- Asia Pacific (Hyderabad)
- Asia Pacific (Malaysia)
- Asia Pacific (Melbourne)
- Asia Pacific (Thailand)
- Canada West (Calgary)

- Europe (Spain)
- Europe (Zurich)
- Israel (Tel Aviv)
- Mexico (Central)
- Middle East (UAE)

The following DB engine versions support dual-stack network DB clusters:

- Aurora MySQL versions:
  - 3.02 and higher 3 versions
  - 2.09.1 and higher 2 versions

  For more information about Aurora MySQL versions, see the *Release Notes for Aurora MySQL*.
- Aurora PostgreSQL versions:
  - 15.2 and all higher versions
  - 14.3 and higher 14 versions
  - 13.7 and higher 13 versions

  For more information about Aurora PostgreSQL versions, see the *Release Notes for Aurora PostgreSQL*.

Limitations for dual-stack network DB clusters

The following limitations apply to dual-stack network DB clusters:

- DB clusters can't use the IPv6 protocol exclusively. They can use IPv4 exclusively, or they can use the IPv4 and IPv6 protocol (dual-stack mode).
- Amazon RDS doesn't support native IPv6 subnets.
- You can't use RDS Proxy with dual-stack mode DB clusters.


Hiding a DB cluster in a VPC from the internet

One common Amazon Aurora scenario is to have a VPC in which you have an Amazon EC2 instance with a public-facing web application and a DB cluster with a database that isn't publicly accessible. For example, you can create a VPC that has a public subnet and a private subnet. EC2 instances

that function as web servers can be deployed in the public subnet. The DB clusters are deployed in the private subnet. In such a deployment, only the web servers have access to the DB clusters. For an illustration of this scenario, see A DB cluster in a VPC accessed by an Amazon EC2 instance in the same VPC.

When you launch a DB cluster inside a VPC, the DB cluster has a private IP address for traffic inside the VPC. This private IP address isn't publicly accessible. You can use the **Public access** option to designate whether the DB cluster also has a public IP address in addition to the private IP address. If the DB cluster is designated as publicly accessible, its DNS endpoint resolves to the private IP address from within the VPC. It resolves to the public IP address from outside of the VPC. Access to the DB cluster is ultimately controlled by the security group it uses. That public access is not permitted if the security group assigned to the DB cluster doesn't include inbound rules that permit it. In addition, for a DB cluster to be publicly accessible, the subnets in its DB subnet group must have an internet gateway. For more information, see Can't connect to Amazon RDS DB instance

You can modify a DB cluster to turn on or off public accessibility by modifying the **Public access** option. The following illustration shows the **Public access** option in the **Additional connectivity configuration** section. To set the option, open the **Additional connectivity configuration** section in the **Connectivity** section.

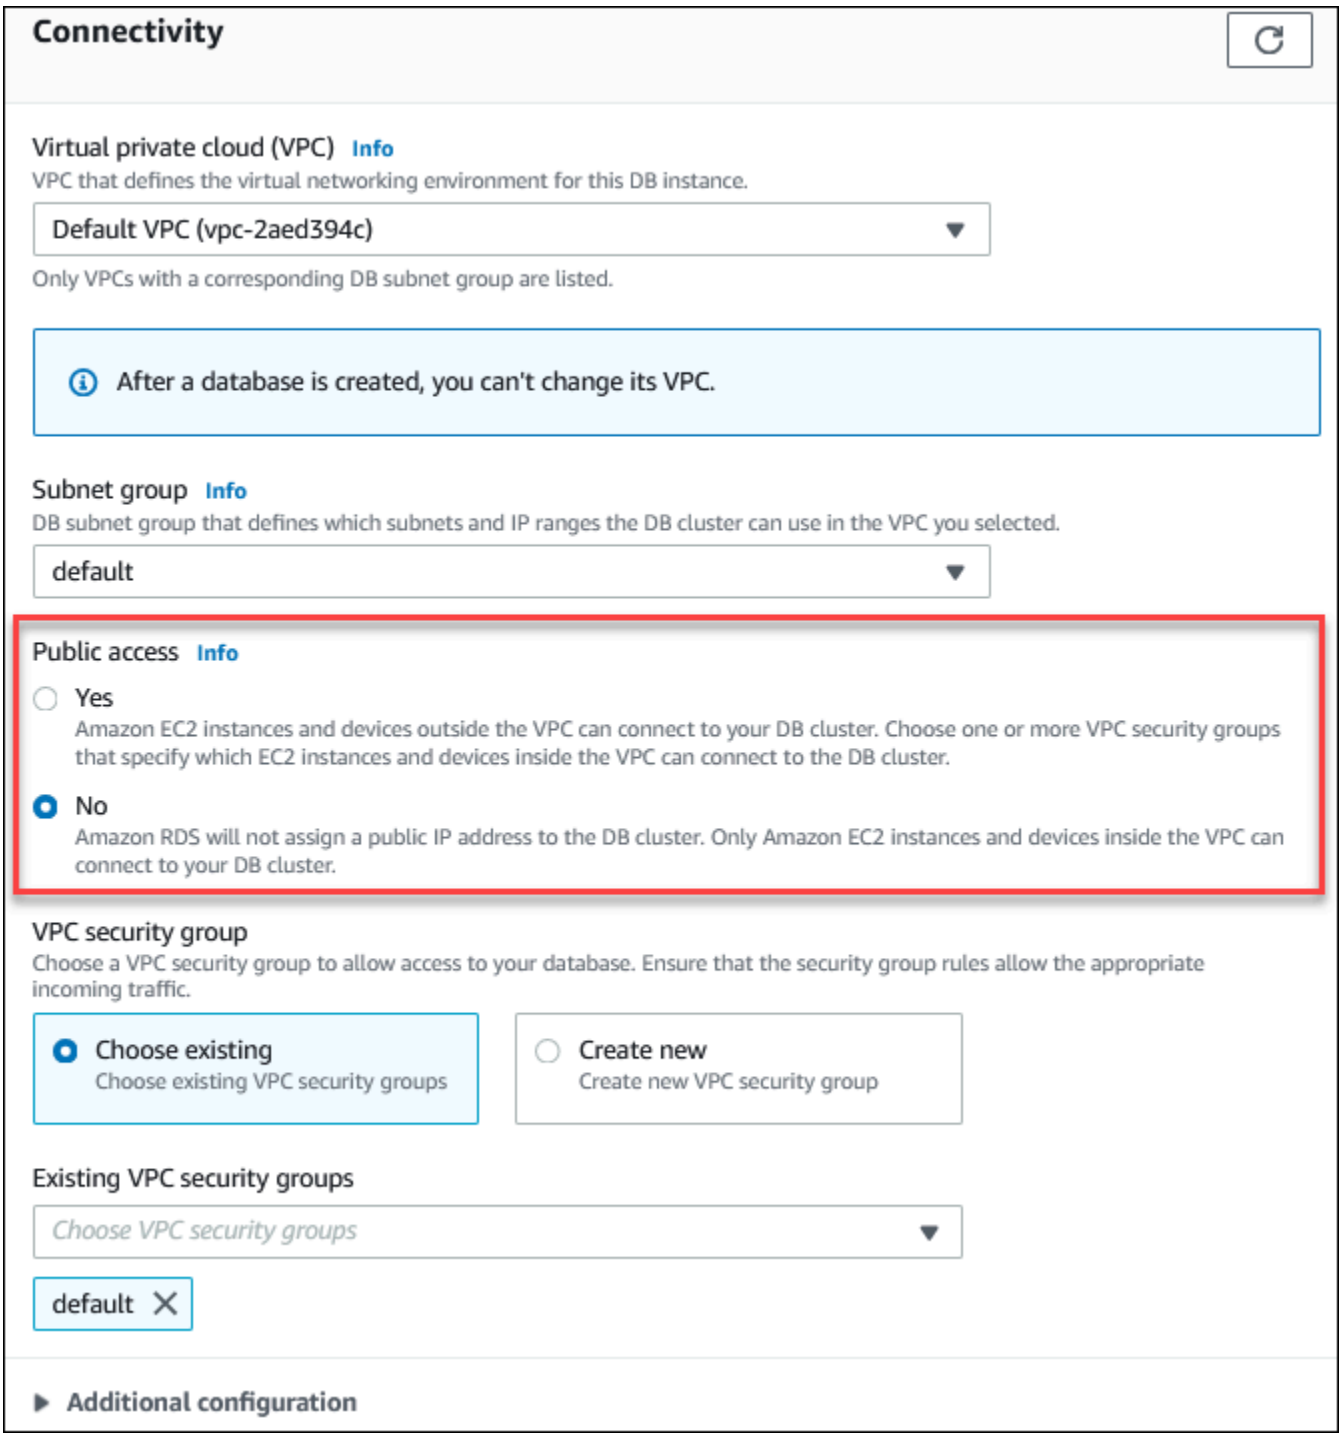

For information about modifying a DB instance to set the **Public access** option, see Modifying a DB instance in a DB cluster.

Creating a DB cluster in a VPC

The following procedures help you create a DB cluster in a VPC. To use the default VPC, you can begin with step 2, and use the VPC and DB subnet group have already been created for you. If you want to create an additional VPC, you can create a new VPC.

> **Note**
>
> If you want your DB cluster in the VPC to be publicly accessible, you must update the DNS information for the VPC by enabling the VPC attributes *DNS hostnames* and *DNS resolution*. For information about updating the DNS information for a VPC instance, see Updating DNS support for your VPC.

Follow these steps to create a DB instance in a VPC:

- Step 1: Create a VPC
- Step 2: Create a DB subnet group
- Step 3: Create a VPC security group
- Step 4: Create a DB instance in the VPC

Step 1: Create a VPC

Create a VPC with subnets in at least two Availability Zones. You use these subnets when you create a DB subnet group. If you have a default VPC, a subnet is automatically created for you in each Availability Zone in the Amazon Web Services Region.

For more information, see Create a VPC with private and public subnets, or see Create a VPC in the *Amazon VPC User Guide*.

Step 2: Create a DB subnet group

A DB subnet group is a collection of subnets (typically private) that you create for a VPC and that you then designate for your DB clusters. A DB subnet group allows you to specify a particular VPC when you create DB clusters using the Amazon CLI or RDS API. If you use the console, you can just choose the VPC and subnets you want to use. Each DB subnet group must have at least one subnet in at least two Availability Zones in the Amazon Web Services Region. As a best practice,

each DB subnet group should have at least one subnet for every Availability Zone in the Amazon Web Services Region.


For a DB cluster to be publicly accessible, the subnets in the DB subnet group must have an internet gateway. For more information about internet gateways for subnets, see Connect to the internet using an internet gateway in the *Amazon VPC User Guide*.

When you create a DB cluster in a VPC, you can choose a DB subnet group. Amazon Aurora chooses a subnet and an IP address within that subnet to associate with your DB cluster. If no DB subnet groups exist, Amazon Aurora creates a default subnet group when you create a DB cluster. Amazon Aurora creates and associates an Elastic Network Interface to your DB cluster with that IP address. The DB cluster uses the Availability Zone that contains the subnet.

In this step, you create a DB subnet group and add the subnets that you created for your VPC.

To create a DB subnet group

1. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the navigation pane, choose **Subnet groups**.
3. Choose **Create DB Subnet Group**.
4. For **Name**, type the name of your DB subnet group.
5. For **Description**, type a description for your DB subnet group.
6. For **VPC**, choose the default VPC or the VPC that you created.
7. In the **Add subnets** section, choose the Availability Zones that include the subnets from **Availability Zones**, and then choose the subnets from **Subnets**.

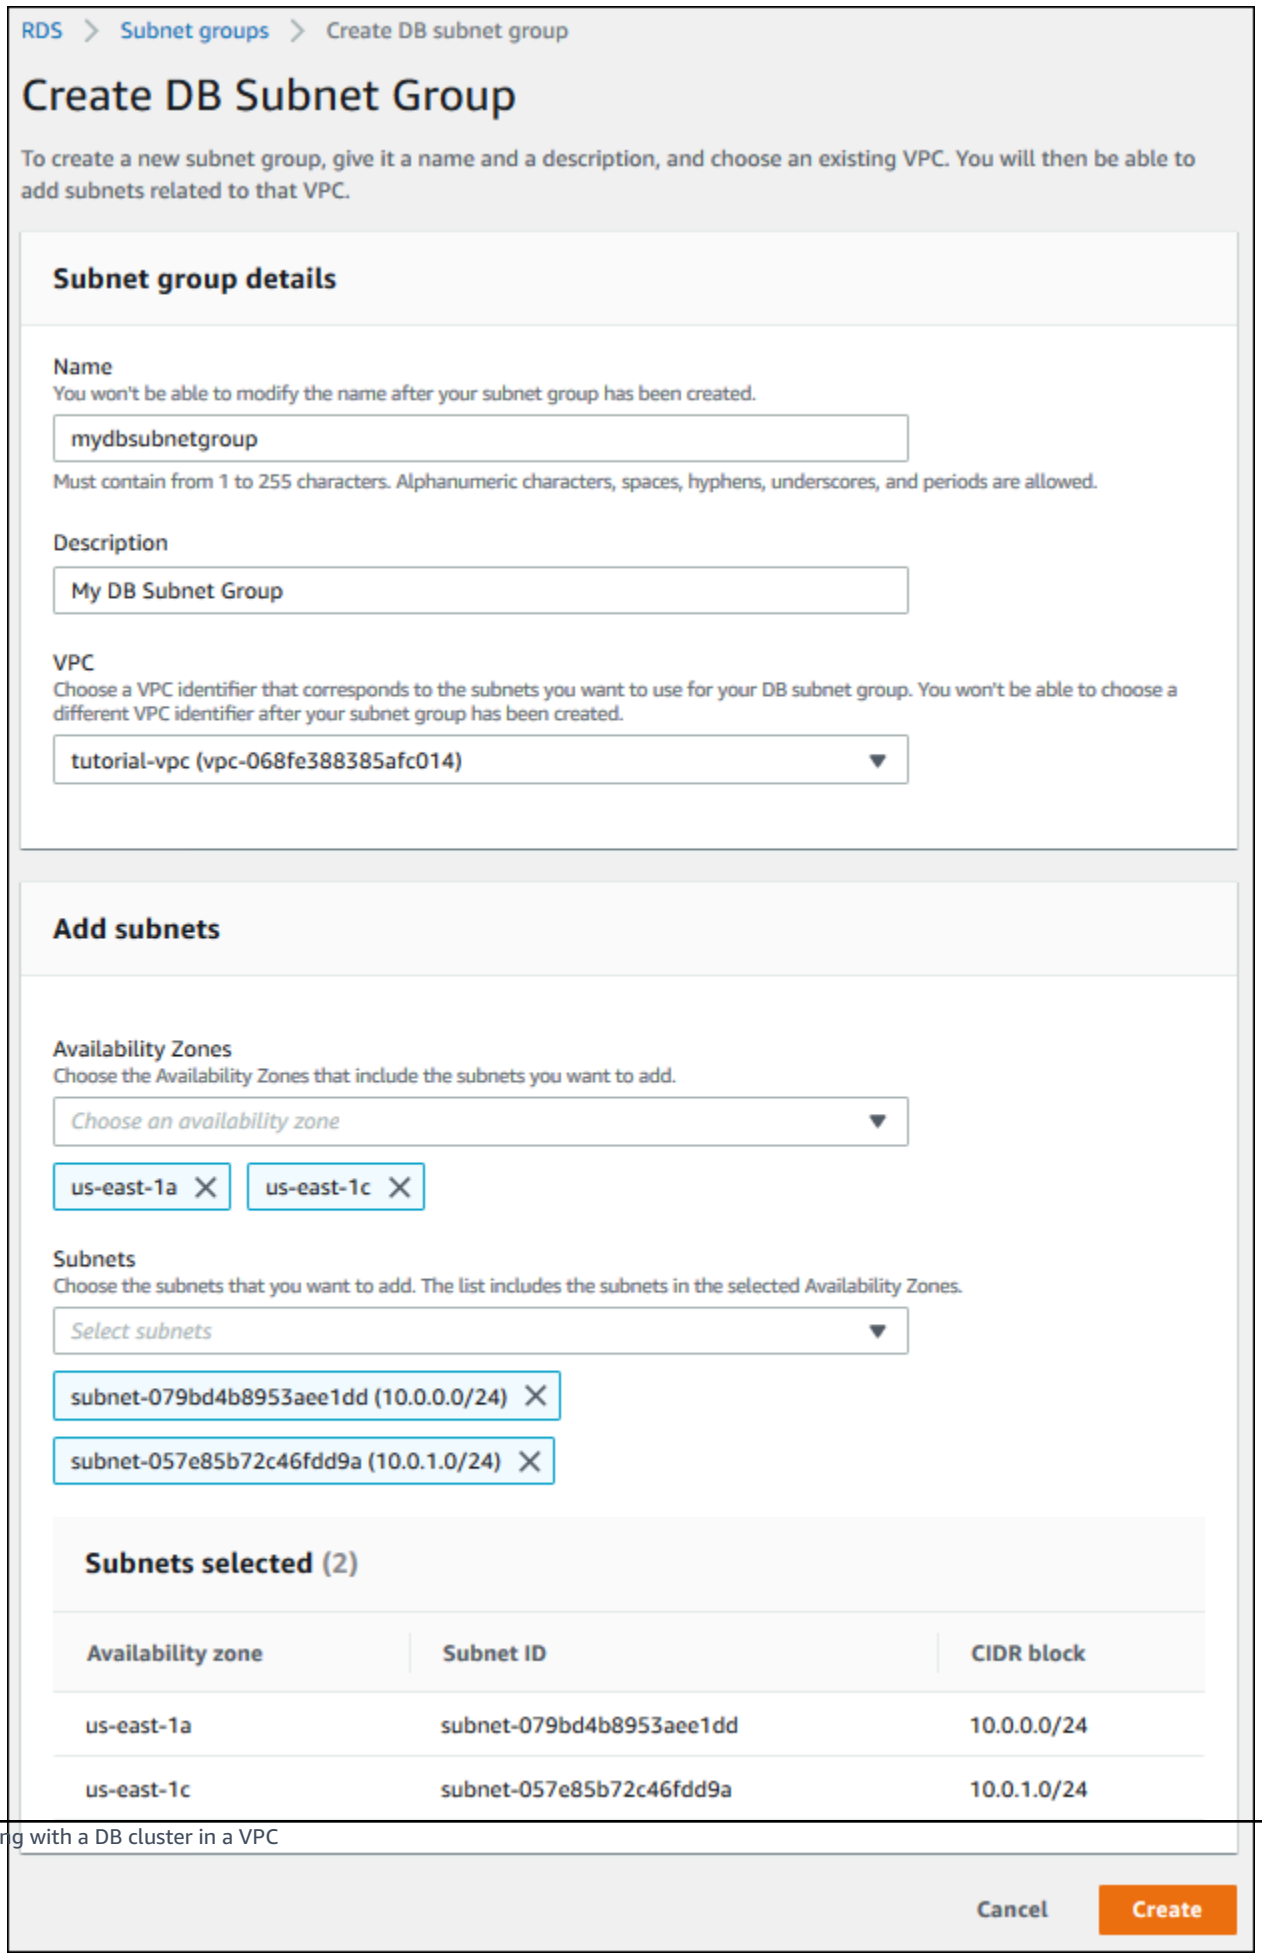
RDS > Subnet groups > Create DB subnet group
Create DB Subnet Group
To create a new subnet group, give it a name and a description, and choose an existing VPC. You will then be able to add subnets related to that VPC.
Subnet group details
Name
You won't be able to modify the name after your subnet group has been created.
mydbsubnetgroup
Must contain from 1 to 255 characters. Alphanumeric characters, spaces, hyphens, underscores, and periods are allowed.
Description
My DB Subnet Group
VPC
Choose a VPC identifier that corresponds to the subnets you want to use for your DB subnet group. You won't be able to choose a different VPC identifier after your subnet group has been created.
tutorial-vpc (vpc-068fe388385afc014)
Add subnets
Availability Zones
Choose the Availability Zones that include the subnets you want to add.
Choose an availability zone
us-east-1a
us-east-1c
Subnets
Choose the subnets that you want to add. The list includes the subnets in the selected Availability Zones.
Select subnets
subnet-079bd4b8953aee1dd (10.0.0.0/24)
subnet-057e85b72c46fdd9a (10.0.1.0/24)
Subnets selected (2)
Availability zone
Subnet ID
CIDR block
us-east-1a
subnet-079bd4b8953aee1dd
10.0.0.0/24
us-east-1c
subnet-057e85b72c46fdd9a
10.0.1.0/24
Cancel
Create

8. Choose **Create**.

   Your new DB subnet group appears in the DB subnet groups list on the RDS console. You can choose the DB subnet group to see details, including all of the subnets associated with the group, in the detail pane.

Step 3: Create a VPC security group

Before you create your DB cluster, you can create a VPC security group to associate with your DB cluster. If you don't create a VPC security group, you can use the default security group when you create a DB cluster. For instructions on how to create a security group for your DB cluster, see Create a VPC security group for a private DB cluster, or see Control traffic to resources using security groups in the *Amazon VPC User Guide*.

Step 4: Create a DB instance in the VPC

In this step, you create a DB cluster and use the VPC name, the DB subnet group, and the VPC security group you created in the previous steps.

> **Note**
>
> If you want your DB cluster in the VPC to be publicly accessible, you must enable the VPC attributes *DNS hostnames* and *DNS resolution*. For more information, see DNS attributes for your VPC in the *Amazon VPC User Guide*.

For details on how to create a DB cluster, see Creating an Amazon Aurora DB cluster.

When prompted in the **Connectivity** section, enter the VPC name, the DB subnet group, and the VPC security group.

> **Note**
>
> Updating VPCs isn't currently supported for Aurora DB clusters.

Scenarios for accessing a DB cluster in a VPC


Amazon Aurora supports the following scenarios for accessing a DB cluster in a VPC:

- An Amazon EC2 instance in the same VPC
- An EC2 instance in a different VPC
- A client application through the internet
- A private network

A DB cluster in a VPC accessed by an Amazon EC2 instance in the same VPC

A common use of a DB cluster in a VPC is to share data with an application server that is running in an Amazon EC2 instance in the same VPC.

The following diagram shows this scenario.

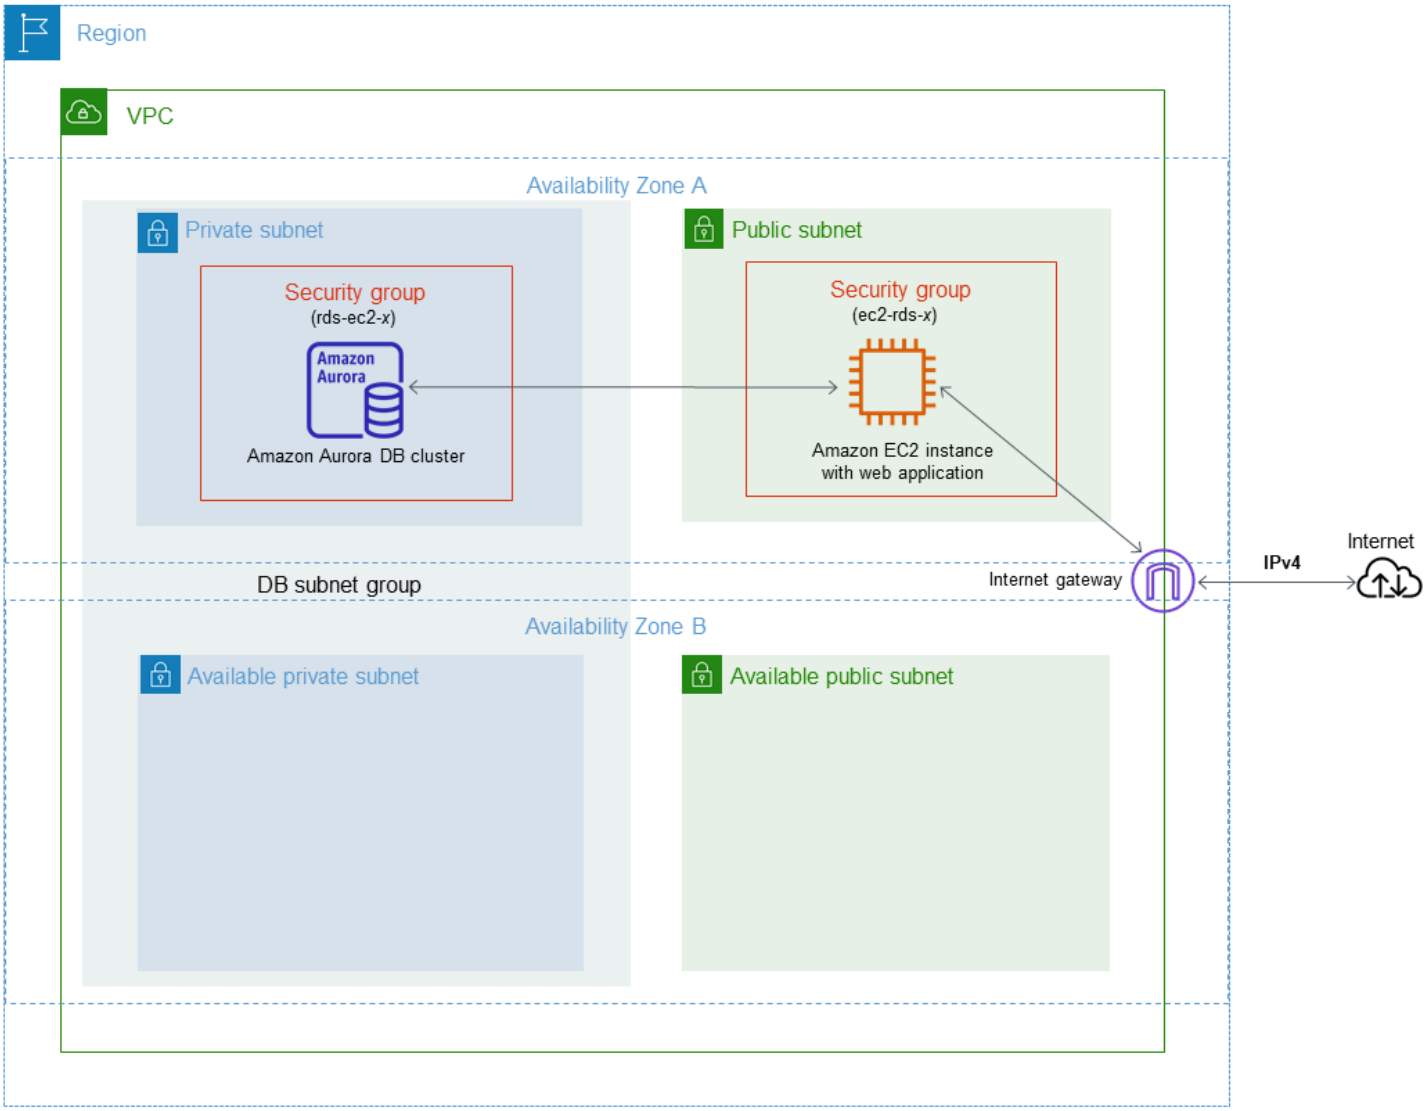

The simplest way to manage access between EC2 instances and DB clusters in the same VPC is to do the following:

- Create a VPC security group for your DB clusters to be in. This security group can be used to restrict access to the DB clusters. For example, you can create a custom rule for this security group. This might allow TCP access using the port that you assigned to the DB cluster when you created it and an IP address you use to access the DB cluster for development or other purposes.
- Create a VPC security group for your EC2 instances (web servers and clients) to be in. This security group can, if needed, allow access to the EC2 instance from the internet by using the VPC's routing table. For example, you can set rules on this security group to allow TCP access to the EC2 instance over port 22.
- Create custom rules in the security group for your DB clusters that allow connections from the security group you created for your EC2 instances. These rules might allow any member of the security group to access the DB clusters.

There is an additional public and private subnet in a separate Availability Zone. An RDS DB subnet group requires a subnet in at least two Availability Zones. The additional subnet makes it easy to switch to a Multi-AZ DB instance deployment in the future.

For a tutorial that shows you how to create a VPC with both public and private subnets for this scenario, see Tutorial: Create a VPC for use with a DB cluster (IPv4 only).

Tip


You can set up network connectivity between an Amazon EC2 instance and a DB cluster automatically when you create the DB cluster. For more information, see Configure automatic network connectivity with an EC2 instance .

To create a rule in a VPC security group that allows connections from another security group, do the following:

1. Sign in to the Amazon Web Services Management Console and open the Amazon VPC console at https://console.amazonaws.cn/vpc.
2. In the navigation pane, choose **Security groups**.

3. Choose or create a security group for which you want to allow access to members of another security group. In the preceding scenario, this is the security group that you use for your DB clusters. Choose the **Inbound rules** tab, and then choose **Edit inbound rules**.
4. On the **Edit inbound rules** page, choose **Add rule**.
5. For **Type**, choose the entry that corresponds to the port you used when you created your DB cluster, such as **MYSQL/Aurora**.
6. In the **Source** box, start typing the ID of the security group, which lists the matching security groups. Choose the security group with members that you want to have access to the resources protected by this security group. In the scenario preceding, this is the security group that you use for your EC2 instance.
7. If required, repeat the steps for the TCP protocol by creating a rule with **All TCP** as the **Type** and your security group in the **Source** box. If you intend to use the UDP protocol, create a rule with **All UDP** as the **Type** and your security group in **Source**.
8. Choose **Save rules**.

The following screen shows an inbound rule with a security group for its source.

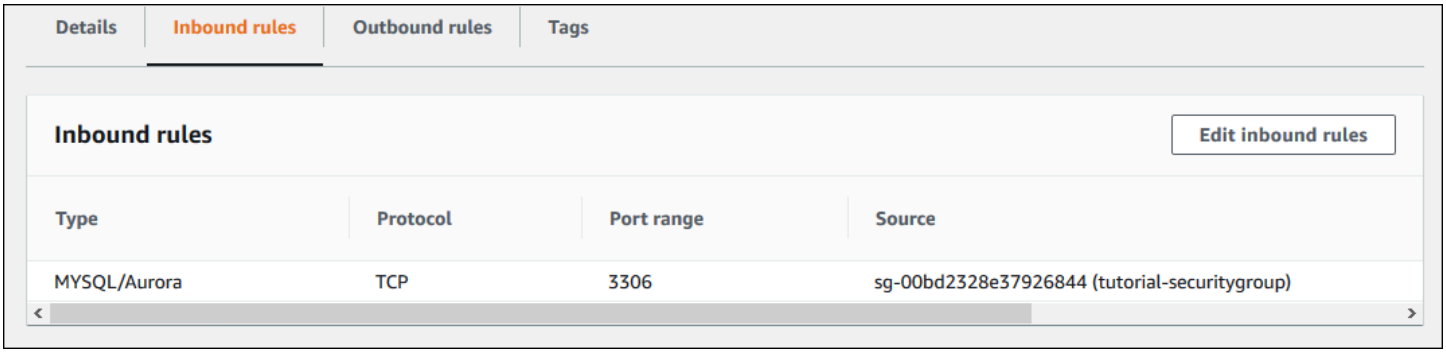


For more information about connecting to the DB cluster from your EC2 instance, see Connecting to an Amazon Aurora DB cluster.

A DB cluster in a VPC accessed by an EC2 instance in a different VPC

When your DB clusters is in a different VPC from the EC2 instance you are using to access it, you can use VPC peering to access the DB cluster.

The following diagram shows this scenario.

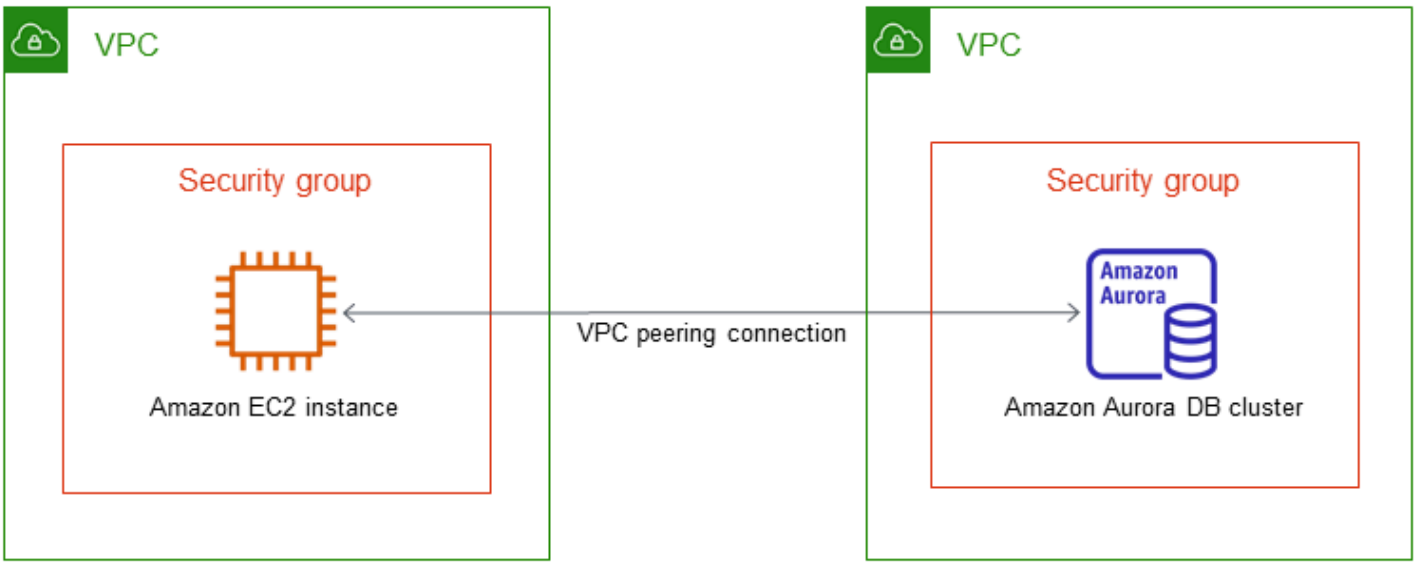


A VPC peering connection is a networking connection between two VPCs that enables you to route traffic between them using private IP addresses. Resources in either VPC can communicate with each other as if they are within the same network. You can create a VPC peering connection between your own VPCs, with a VPC in another Amazon account, or with a VPC in a different Amazon Web Services Region. To learn more about VPC peering, see VPC peering in the *Amazon Virtual Private Cloud User Guide*.

A DB cluster in a VPC accessed by a client application through the internet

To access a DB clusters in a VPC from a client application through the internet, you configure a VPC with a single public subnet, and an internet gateway to enable communication over the internet.

The following diagram shows this scenario.

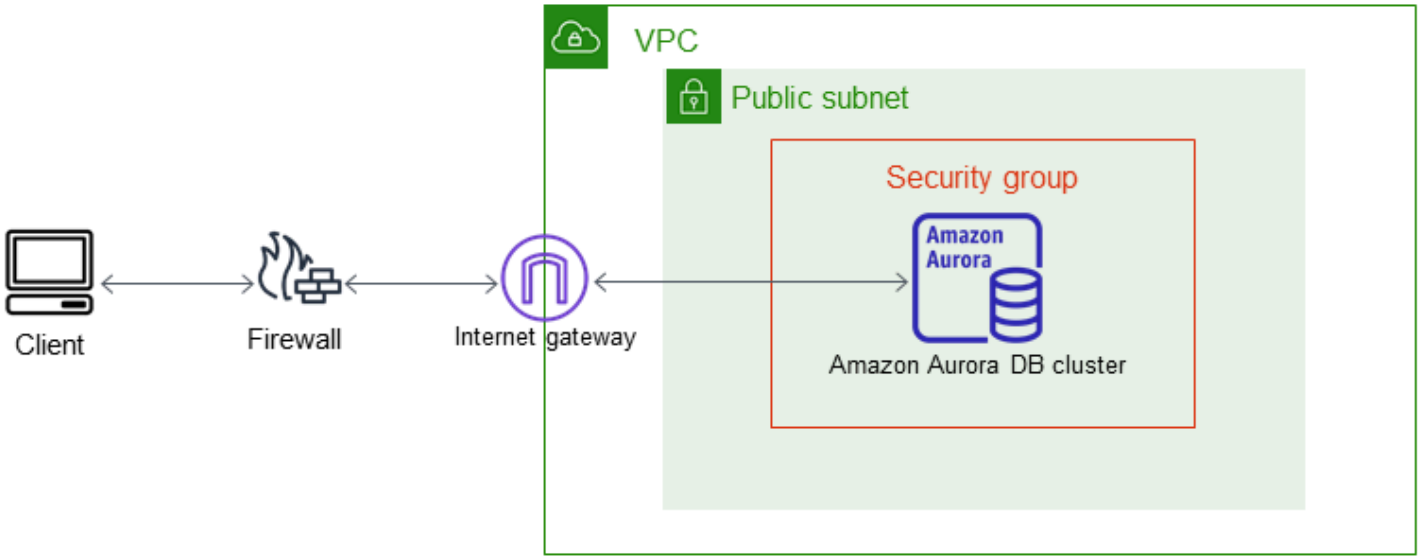

We recommend the following configuration:

- A VPC of size /16 (for example CIDR: 10.0.0.0/16). This size provides 65,536 private IP addresses.
- A subnet of size /24 (for example CIDR: 10.0.0.0/24). This size provides 256 private IP addresses.
- An Amazon Aurora DB cluster that is associated with the VPC and the subnet. Amazon RDS assigns an IP address within the subnet to your DB cluster.
- An internet gateway which connects the VPC to the internet and to other Amazon products.
- A security group associated with the DB cluster. The security group's inbound rules allow your client application to access to your DB cluster.


For information about creating a DB clusters in a VPC, see Creating a DB cluster in a VPC.

A DB cluster in a VPC accessed by a private network

If your DB cluster isn't publicly accessible, you have the following options for accessing it from a private network:

- An Amazon Site-to-Site VPN connection. For more information, see What is Amazon Site-to-Site VPN?
- An Amazon Direct Connect connection. For more information, see What is Amazon Direct Connect?
- An Amazon Client VPN connection. For more information, see What is Amazon Client VPN?

The following diagram shows a scenario with an Amazon Site-to-Site VPN connection.

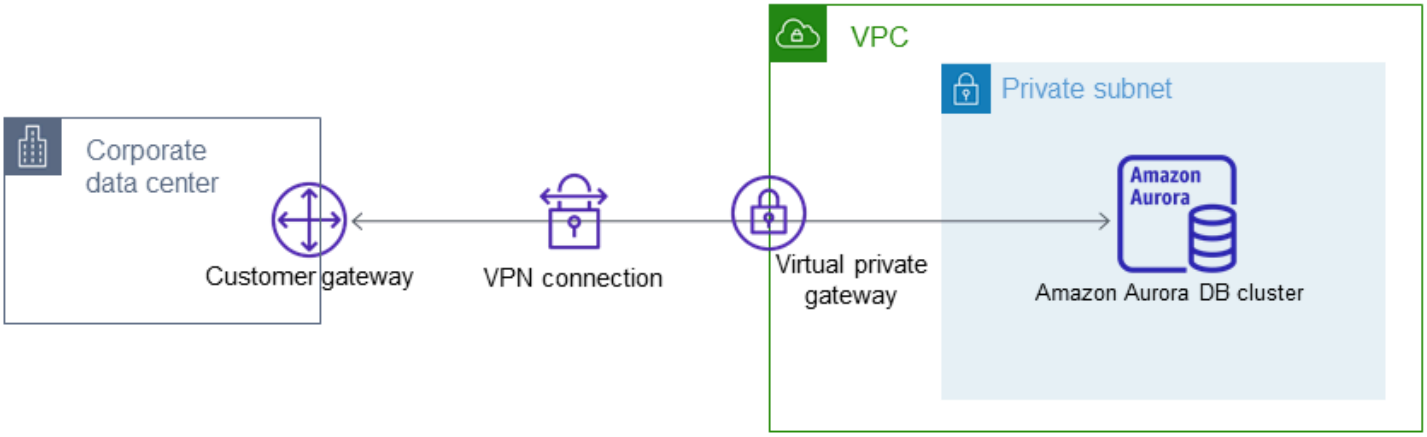


For more information, see Internetwork traffic privacy.

Tutorial: Create a VPC for use with a DB cluster (IPv4 only)

A common scenario includes a DB cluster in a virtual private cloud (VPC) based on the Amazon VPC service. This VPC shares data with a web server that is running in the same VPC. In this tutorial, you create the VPC for this scenario.

The following diagram shows this scenario. For information about other scenarios, see Scenarios for accessing a DB cluster in a VPC.

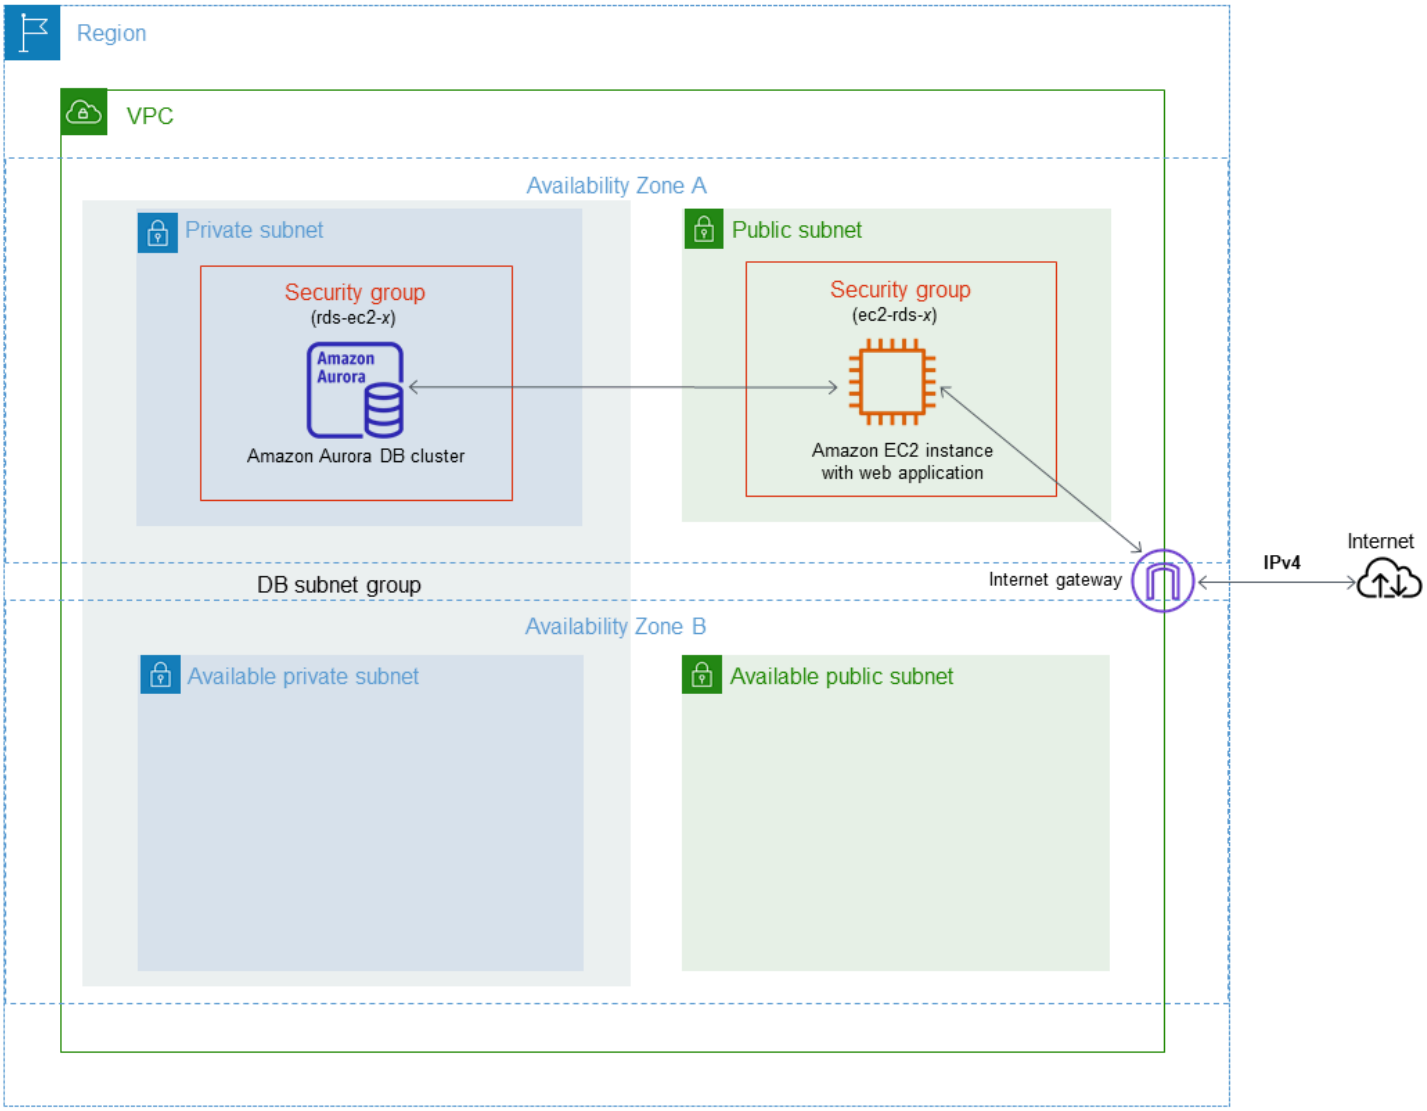

Your DB cluster needs to be available only to your web server, and not to the public internet. Thus, you create a VPC with both public and private subnets. The web server is hosted in the public subnet, so that it can reach the public internet. The DB cluster is hosted in a private subnet. The web server can connect to the DB cluster because it is hosted within the same VPC. But the DB cluster isn't available to the public internet, providing greater security.

This tutorial configures an additional public and private subnet in a separate Availability Zone. These subnets aren't used by the tutorial. An RDS DB subnet group requires a subnet in at least two Availability Zones. The additional subnet makes it easier to configure more than one Aurora DB instance.

This tutorial describes configuring a VPC for Amazon Aurora DB clusters. For a tutorial that shows you how to create a web server for this VPC scenario, see Tutorial: Create a web server and an Amazon Aurora DB cluster. For more information about Amazon VPC, see Amazon VPC Getting Started Guide and Amazon VPC User Guide.

> **Tip**
>
> You can set up network connectivity between an Amazon EC2 instance and a DB cluster automatically when you create the DB cluster. The network configuration is similar to the one described in this tutorial. For more information, see Configure automatic network connectivity with an EC2 instance.

Create a VPC with private and public subnets

Use the following procedure to create a VPC with both public and private subnets.

To create a VPC and subnets

1. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.
2. In the Amazon Web Services Management Console, choose the Region to create your VPC in. This example uses the US West (Oregon) Region.
3. Choose **VPC dashboard**. To begin creating a VPC, choose **Create VPC**.
4. For **Resources to create** under **VPC settings**, choose **VPC and more**.
5. For the **VPC settings**, set these values:

   - **Name tag auto-generation** – `tutorial`
   - **IPv4 CIDR block** – `10.0.0.0/16`
   - **IPv6 CIDR block** – **No IPv6 CIDR block**
   - **Tenancy** – **Default**
   - **Number of Availability Zones (AZs)** – **2**
   - **Customize AZs** – Keep the default values.

- **Number of public subnet** – **2**
- **Number of private subnets** – **2**
- **Customize subnets CIDR blocks** – Keep the default values.
- **NAT gateways ($)** – **None**
- **VPC endpoints** – **None**
- **DNS options** – Keep the default values.

6. Choose **Create VPC**.

Create a VPC security group for a public web server

Next, you create a security group for public access. To connect to public EC2 instances in your VPC, you add inbound rules to your VPC security group. These allow traffic to connect from the internet.

To create a VPC security group

1. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.
2. Choose **VPC Dashboard**, choose **Security Groups**, and then choose **Create security group**.
3. On the **Create security group** page, set these values:

   - **Security group name: `tutorial-securitygroup`**
   - **Description: `Tutorial Security Group`**
   - **VPC:** Choose the VPC that you created earlier, for example: **vpc-*identifier* (tutorial-vpc)**

4. Add inbound rules to the security group.

   a. Determine the IP address to use to connect to EC2 instances in your VPC using Secure Shell (SSH). To determine your public IP address, in a different browser window or tab, you can use the service at https://checkip.amazonaws.com. An example of an IP address is `203.0.113.25/32`.

      In many cases, you might connect through an internet service provider (ISP) or from behind your firewall without a static IP address. If so, find the range of IP addresses used by client computers.

> **Warning**
>
> If you use `0.0.0.0/0` for SSH access, you make it possible for all IP addresses to access your public instances using SSH. This approach is acceptable for a short time in a test environment, but it's unsafe for production environments. In production, authorize only a specific IP address or range of addresses to access your instances using SSH.

b. In the **Inbound rules** section, choose **Add rule**.

c. Set the following values for your new inbound rule to allow SSH access to your Amazon EC2 instance. If you do this, you can connect to your Amazon EC2 instance to install the web server and other utilities. You also connect to your EC2 instance to upload content for your web server.

- **Type: SSH**
- **Source:** The IP address or range from Step a, for example: **`203.0.113.25/32`**.

d. Choose **Add rule**.

e. Set the following values for your new inbound rule to allow HTTP access to your web server:

- **Type: HTTP**
- **Source: `0.0.0.0/0`**

5. Choose **Create security group** to create the security group.

   Note the security group ID because you need it later in this tutorial.

Create a VPC security group for a private DB cluster

To keep your DB cluster private, create a second security group for private access. To connect to private DB clusters in your VPC, you add inbound rules to your VPC security group that allow traffic from your web server only.

To create a VPC security group

1. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.
2. Choose **VPC Dashboard**, choose **Security Groups**, and then choose **Create security group**.

3. On the **Create security group** page, set these values:

   - **Security group name: `tutorial-db-securitygroup`**
   - **Description: `Tutorial DB Instance Security Group`**
   - **VPC:** Choose the VPC that you created earlier, for example: **vpc-*identifier* (tutorial-vpc)**

4. Add inbound rules to the security group.

   a. In the **Inbound rules** section, choose **Add rule**.

   b. Set the following values for your new inbound rule to allow MySQL traffic on port 3306 from your Amazon EC2 instance. If you do this, you can connect from your web server to your DB cluster. By doing so, you can store and retrieve data from your web application to your database.

      - **Type: `MySQL/Aurora`**
      - **Source:** The identifier of the **tutorial-securitygroup** security group that you created previously in this tutorial, for example: **sg-9edd5cfb**.

5. Choose **Create security group** to create the security group.

Create a DB subnet group

A *DB subnet group* is a collection of subnets that you create in a VPC and that you then designate for your DB clusters. A DB subnet group makes it possible for you to specify a particular VPC when creating DB clusters.

To create a DB subnet group

1. Identify the private subnets for your database in the VPC.

   a. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

   b. Choose **VPC Dashboard**, and then choose **Subnets**.

   c. Note the subnet IDs of the subnets named **tutorial-subnet-private1-us-west-2a** and **tutorial-subnet-private2-us-west-2b**.

      You need the subnet IDs when you create your DB subnet group.

2. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.

   Make sure that you connect to the Amazon RDS console, not to the Amazon VPC console.

3. In the navigation pane, choose **Subnet groups**.
4. Choose **Create DB subnet group**.
5. On the **Create DB subnet group** page, set these values in **Subnet group details**:
   - **Name: `tutorial-db-subnet-group`**
   - **Description: `Tutorial DB Subnet Group`**
   - **VPC: tutorial-vpc (vpc-*`identifier`*)**
6. In the **Add subnets** section, choose the **Availability Zones** and **Subnets**.

   For this tutorial, choose **us-west-2a** and **us-west-2b** for the **Availability Zones**. For **Subnets**, choose the private subnets you identified in the previous step.
7. Choose **Create**.

   Your new DB subnet group appears in the DB subnet groups list on the RDS console. You can choose the DB subnet group to see details in the details pane. These details include all of the subnets associated with the group.

> **Note**
>
> If you created this VPC to complete Tutorial: Create a web server and an Amazon Aurora DB cluster, create the DB cluster by following the instructions in Create an Amazon Aurora DB cluster.

Deleting the VPC

After you create the VPC and other resources for this tutorial, you can delete them if they are no longer needed.

> **Note**
>
> If you added resources in the VPC that you created for this tutorial, you might need to delete these before you can delete the VPC. For example, these resources might include Amazon EC2 instances or Amazon RDS DB clusters. For more information, see Delete your VPC in the *Amazon VPC User Guide*.

To delete a VPC and related resources

1. Delete the DB subnet group.

   a. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.

   b. In the navigation pane, choose **Subnet groups**.

   c. Select the DB subnet group you want to delete, such as **tutorial-db-subnet-group**.

   d. Choose **Delete**, and then choose **Delete** in the confirmation window.

2. Note the VPC ID.

   a. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

   b. Choose **VPC Dashboard**, and then choose **VPCs**.

   c. In the list, identify the VPC that you created, such as **tutorial-vpc**.

   d. Note the **VPC ID** of the VPC that you created. You need the VPC ID in later steps.

3. Delete the security groups.

   a. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

   b. Choose **VPC Dashboard**, and then choose **Security Groups**.

   c. Select the security group for the Amazon RDS DB instance, such as **tutorial-db-securitygroup**.

   d. For **Actions**, choose **Delete security groups**, and then choose **Delete** on the confirmation page.

   e. On the **Security Groups** page, select the security group for the Amazon EC2 instance, such as **tutorial-securitygroup**.

   f. For **Actions**, choose **Delete security groups**, and then choose **Delete** on the confirmation page.

4. Delete the VPC.

   a. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

   b. Choose **VPC Dashboard**, and then choose **VPCs**.

   c. Select the VPC you want to delete, such as **tutorial-vpc**.

   d. For **Actions**, choose **Delete VPC**.

   The confirmation page shows other resources that are associated with the VPC that will also be deleted, including the subnets associated with it.

e. On the confirmation page, enter **`delete`**, and then choose **Delete**.


Tutorial: Create a VPC for use with a DB cluster (dual-stack mode)

A common scenario includes a DB cluster in a virtual private cloud (VPC) based on the Amazon VPC service. This VPC shares data with a public Amazon EC2 instance that is running in the same VPC.

In this tutorial, you create the VPC for this scenario that works with a database running in dual-stack mode. Dual-stack mode to enable connection over the IPv6 addressing protocol. For more information about IP addressing, see Amazon Aurora IP addressing.

Dual-stack network clusters are supported in most regions. For more information see Availability of dual-stack network DB clusters. To see the limitations of dual-stack mode, see Limitations for dual-stack network DB clusters.

The following diagram shows this scenario.

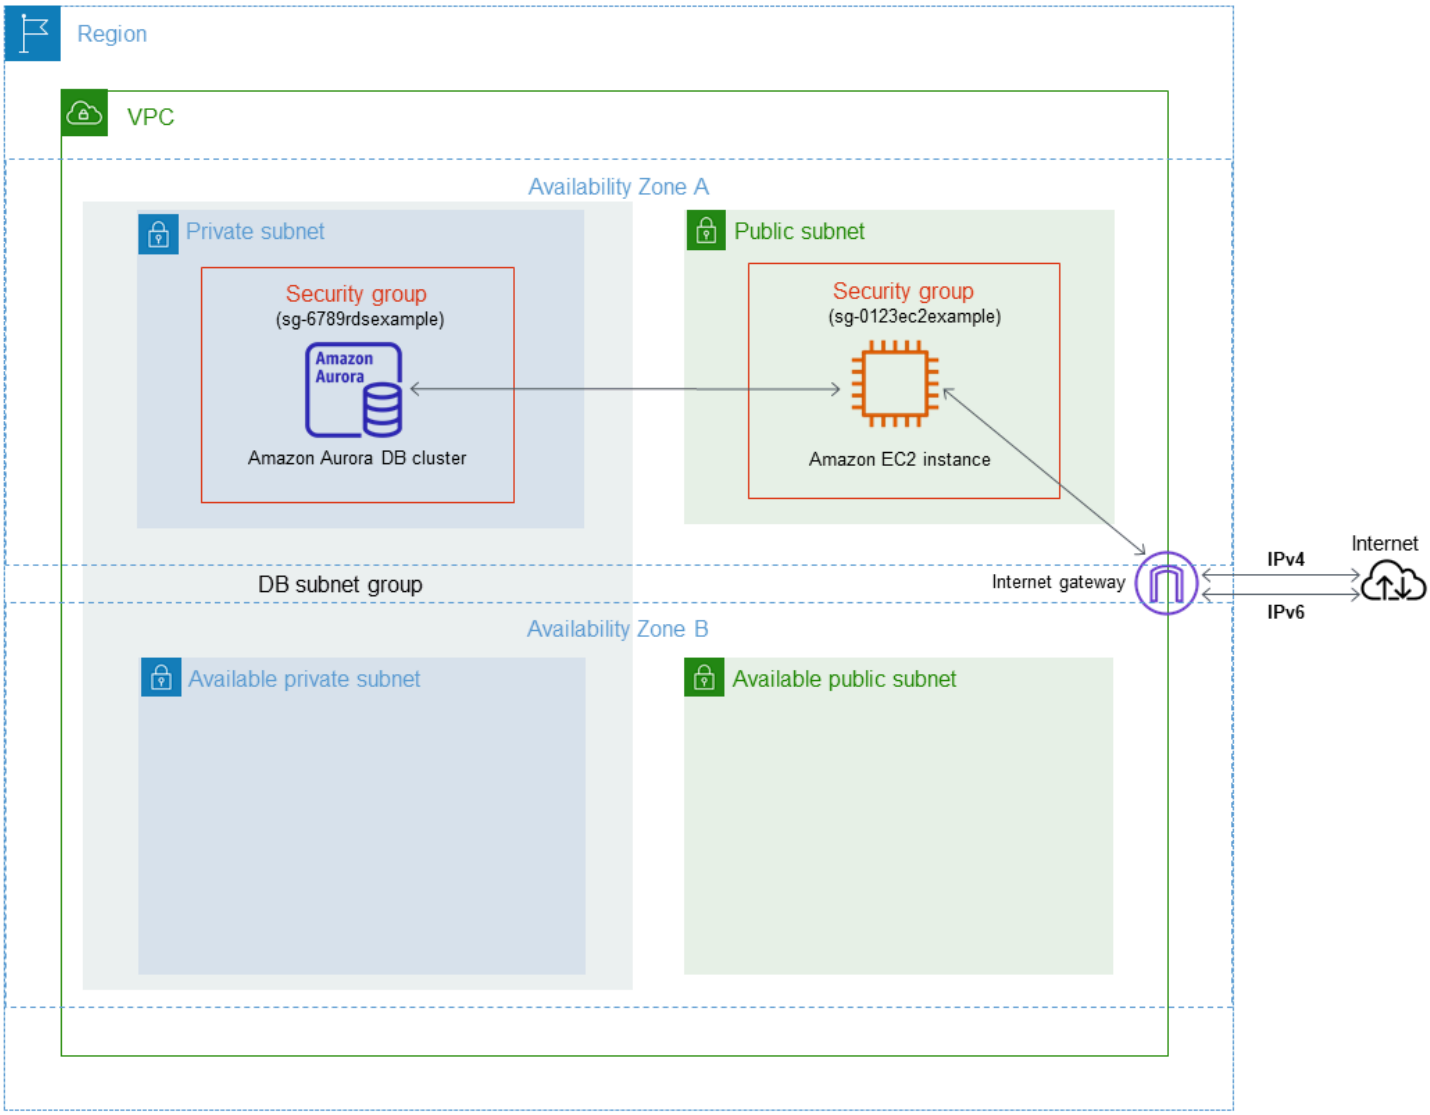

For information about other scenarios, see Scenarios for accessing a DB cluster in a VPC.

Your DB cluster needs to be available only to your Amazon EC2 instance, and not to the public internet. Thus, you create a VPC with both public and private subnets. The Amazon EC2 instance is hosted in the public subnet, so that it can reach the public internet. The DB cluster is hosted in a private subnet. The Amazon EC2 instance can connect to the DB cluster because it's hosted within the same VPC. However, the DB cluster is not available to the public internet, providing greater security.

This tutorial configures an additional public and private subnet in a separate Availability Zone. These subnets aren't used by the tutorial. An RDS DB subnet group requires a subnet in at least two Availability Zones. The additional subnet makes it easy to configure more than one Aurora DB instance.

To create a DB cluster that uses dual-stack mode, specify **Dual-stack mode** for the **Network type** setting. You can also modify a DB cluster with the same setting. For more information about creating a DB cluster, see Creating an Amazon Aurora DB cluster. For more information about modifying a DB cluster, see Modifying an Amazon Aurora DB cluster.

This tutorial describes configuring a VPC for Amazon Aurora DB clusters. For more information about Amazon VPC, see Amazon VPC User Guide.

Create a VPC with private and public subnets

Use the following procedure to create a VPC with both public and private subnets.

To create a VPC and subnets

1. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.
2. In the Amazon Web Services Management Console, choose the Region to create your VPC in. This example uses the US East (Ohio) Region.
3. Choose **VPC dashboard**. To begin creating a VPC, choose **Create VPC**.
4. For **Resources to create** under **VPC settings**, choose **VPC and more**.
5. For the remaining **VPC settings**, set these values:
   - **Name tag auto-generation** – `tutorial-dual-stack`
   - **IPv4 CIDR block** – `10.0.0.0/16`
   - **IPv6 CIDR block** – **Amazon-provided IPv6 CIDR block**
   - **Tenancy** – **Default**
   - **Number of Availability Zones (AZs)** – **2**
   - **Customize AZs** – Keep the default values.
   - **Number of public subnet** – **2**
   - **Number of private subnets** – **2**
   - **Customize subnets CIDR blocks** – Keep the default values.
   - **NAT gateways ($)** – **None**
   - **Egress only internet gateway** – **No**
   - **VPC endpoints** – **None**
   - **DNS options** – Keep the default values.

> **Note**
>
> Amazon RDS requires at least two subnets in two different Availability Zones to support Multi-AZ DB instance deployments. This tutorial creates a Single-AZ deployment, but the requirement makes it easy to convert to a Multi-AZ DB instance deployment in the future.

6. Choose **Create VPC**.

Create a VPC security group for a public Amazon EC2 instance

Next, you create a security group for public access. To connect to public EC2 instances in your VPC, add inbound rules to your VPC security group that allow traffic to connect from the internet.

To create a VPC security group

1. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.
2. Choose **VPC Dashboard**, choose **Security Groups**, and then choose **Create security group**.
3. On the **Create security group** page, set these values:
   - **Security group name: `tutorial-dual-stack-securitygroup`**
   - **Description: `Tutorial Dual-Stack Security Group`**
   - **VPC:** Choose the VPC that you created earlier, for example: **vpc-*identifier* (tutorial-dual-stack-vpc)**
4. Add inbound rules to the security group.
   a. Determine the IP address to use to connect to EC2 instances in your VPC using Secure Shell (SSH).

      An example of an Internet Protocol version 4 (IPv4) address is `203.0.113.25/32`. An example of an Internet Protocol version 6 (IPv6) address range is `2001:db8:1234:1a00::/64`.

      In many cases, you might connect through an internet service provider (ISP) or from behind your firewall without a static IP address. If so, find the range of IP addresses used by client computers.

> **Warning**
>
> If you use `0.0.0.0/0` for IPv4 or `::0` for IPv6, you make it possible for all IP addresses to access your public instances using SSH. This approach is acceptable for a short time in a test environment, but it's unsafe for production environments. In production, authorize only a specific IP address or range of addresses to access your instances.

b. In the **Inbound rules** section, choose **Add rule**.

c. Set the following values for your new inbound rule to allow Secure Shell (SSH) access to your Amazon EC2 instance. If you do this, you can connect to your EC2 instance to install SQL clients and other applications. Specify an IP address so you can access your EC2 instance:

- **Type: SSH**
- **Source:** The IP address or range from step a. An example of an IPv4 IP address is **`203.0.113.25/32`**. An example of an IPv6 IP address is **`2001:DB8::/32`**.

5. Choose **Create security group** to create the security group.

   Note the security group ID because you need it later in this tutorial.

Create a VPC security group for a private DB cluster

To keep your DB cluster private, create a second security group for private access. To connect to private DB clusters in your VPC, add inbound rules to your VPC security group. These allow traffic from your Amazon EC2 instance only.

To create a VPC security group

1. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.
2. Choose **VPC Dashboard**, choose **Security Groups**, and then choose **Create security group**.
3. On the **Create security group** page, set these values:

- **Security group name: `tutorial-dual-stack-db-securitygroup`**
- **Description: `Tutorial Dual-Stack DB Instance Security Group`**

- **VPC:** Choose the VPC that you created earlier, for example: **vpc-*identifier* (tutorial-dual-stack-vpc)**

4. Add inbound rules to the security group:

   a. In the **Inbound rules** section, choose **Add rule**.

   b. Set the following values for your new inbound rule to allow MySQL traffic on port 3306 from your Amazon EC2 instance. If you do, you can connect from your EC2 instance to your DB cluster. Doing this means that you can send data from your EC2 instance to your database.

      - **Type: MySQL/Aurora**
      - **Source:** The identifier of the **tutorial-dual-stack-securitygroup** security group that you created previously in this tutorial, for example **sg-9edd5cfb**.

5. To create the security group, choose **Create security group**.

Create a DB subnet group

A *DB subnet group* is a collection of subnets that you create in a VPC and that you then designate for your DB clusters. By using a DB subnet group, you can specify a particular VPC when creating DB clusters. To create a DB subnet group that is DUAL compatible, all subnets must be DUAL compatible. To be DUAL compatible, a subnet must have an IPv6 CIDR associated with it.

To create a DB subnet group

1. Identify the private subnets for your database in the VPC.

   a. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

   b. Choose **VPC Dashboard**, and then choose **Subnets**.

   c. Note the subnet IDs of the subnets named **tutorial-dual-stack-subnet-private1-us-west-2a** and **tutorial-dual-stack-subnet-private2-us-west-2b**.

      You will need the subnet IDs when you create your DB subnet group.

2. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.

   Make sure that you connect to the Amazon RDS console, not to the Amazon VPC console.

3. In the navigation pane, choose **Subnet groups**.

4. Choose **Create DB subnet group**.

5. On the **Create DB subnet group** page, set these values in **Subnet group details**:
   - **Name: `tutorial-dual-stack-db-subnet-group`**
   - **Description: `Tutorial Dual-Stack DB Subnet Group`**
   - **VPC: tutorial-dual-stack-vpc (vpc-*`identifier`*)**
6. In the **Add subnets** section, choose values for the **Availability Zones** and **Subnets** options.

   For this tutorial, choose **us-east-2a** and **us-east-2b** for the **Availability Zones**. For **Subnets**, choose the private subnets you identified in the previous step.
7. Choose **Create**.

Your new DB subnet group appears in the DB subnet groups list on the RDS console. You can choose the DB subnet group to see its details. These include the supported addressing protocols and all of the subnets associated with the group and the network type supported by the DB subnet group.

Create an Amazon EC2 instance in dual-stack mode

To create an Amazon EC2 instance, follow the instructions in Launch an instance using the new launch instance wizard in the *Amazon EC2 User Guide*.

On the **Configure Instance Details** page, set these values and keep the other values as their defaults:

- **Network** – Choose an existing VPC with both public and private subnets, such as **tutorial-dual-stack-vpc** (vpc-*`identifier`*) created in Create a VPC with private and public subnets.
- **Subnet** – Choose an existing public subnet, such as **subnet-*`identifier`* | tutorial-dual-stack-subnet-public1-us-east-2a | us-east-2a** created in Create a VPC security group for a public Amazon EC2 instance.
- **Auto-assign Public IP** – Choose **Enable**.
- **Auto-assign IPv6 IP** – Choose **Enable**.
- **Firewall (security groups)** – Choose **Select an existing security group**.
- **Common security groups** – Choose an existing security group, such as the `tutorial-securitygroup` created in Create a VPC security group for a public Amazon EC2 instance. Make sure that the security group that you choose includes inbound rules for Secure Shell (SSH) and HTTP access.


Create a DB cluster in dual-stack mode

In this step, you create a DB cluster that runs in dual-stack mode.

To create a DB instance

1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
2. In the console, choose the Amazon Web Services Region where you want to create the DB cluster. This example uses the US East (Ohio) Region.
3. In the navigation pane, choose **Databases**.
4. Choose **Create database**.
5. On the **Create database** page, make sure that the **Standard create** option is chosen, and then choose the Aurora MySQL DB engine type.
6. In the **Connectivity** section, set these values:

   - **Network type** – Choose **Dual-stack mode**.

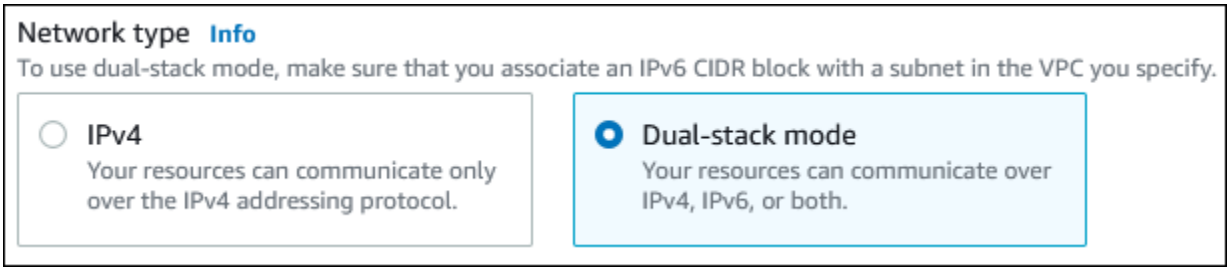   - **Virtual private cloud (VPC)** – Choose an existing VPC with both public and private subnets, such as **tutorial-dual-stack-vpc** (vpc-*identifier*) created in Create a VPC with private and public subnets.

     The VPC must have subnets in different Availability Zones.

   - **DB subnet group** – Choose a DB subnet group for the VPC, such as **tutorial-dual-stack-db-subnet-group** created in Create a DB subnet group.
   - **Public access** – Choose **No**.
   - **VPC security group (firewall)** – Select **Choose existing**.
   - **Existing VPC security groups** – Choose an existing VPC security group that is configured for private access, such as **tutorial-dual-stack-db-securitygroup** created in Create a VPC security group for a private DB cluster.

Remove other security groups, such as the default security group, by choosing the **X** associated with each.

- **Availability Zone** – Choose **us-west-2a**.

  To avoid cross-AZ traffic, make sure the DB instance and the EC2 instance are in the same Availability Zone.

7. For the remaining sections, specify your DB cluster settings. For information about each setting, see Settings for Aurora DB clusters.

Connect to your Amazon EC2 instance and DB cluster

After you create your Amazon EC2 instance and DB cluster in dual-stack mode, you can connect to each one using the IPv6 protocol. To connect to an Amazon EC2 instance using the IPv6 protocol, follow the instructions in Connect to your Linux instance in the *Amazon EC2 User Guide*.

To connect to your Aurora MySQL DB cluster from the Amazon EC2 instance, follow the instructions in Connect to an Aurora MySQL DB cluster.

Deleting the VPC

After you create the VPC and other resources for this tutorial, you can delete them if they are no longer needed.

If you added resources in the VPC that you created for this tutorial, you might need to delete these before you can delete the VPC. Examples of resources are Amazon EC2 instances or DB clusters. For more information, see Delete your VPC in the *Amazon VPC User Guide*.

To delete a VPC and related resources

1. Delete the DB subnet group:

   a. Open the Amazon RDS console at https://console.amazonaws.cn/rds/.
   b. In the navigation pane, choose **Subnet groups**.
   c. Select the DB subnet group to delete, such as **tutorial-db-subnet-group**.
   d. Choose **Delete**, and then choose **Delete** in the confirmation window.
2. Note the VPC ID:

   a. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

b. Choose **VPC Dashboard**, and then choose **VPCs**.

c. In the list, identify the VPC you created, such as **tutorial-dual-stack-vpc**.

d. Note the **VPC ID** value of the VPC that you created. You need this VPC ID in subsequent steps.

3. Delete the security groups:

a. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

b. Choose **VPC Dashboard**, and then choose **Security Groups**.

c. Select the security group for the Amazon RDS DB instance, such as **tutorial-dual-stack-db-securitygroup**.

d. For **Actions**, choose **Delete security groups**, and then choose **Delete** on the confirmation page.

e. On the **Security Groups** page, select the security group for the Amazon EC2 instance, such as **tutorial-dual-stack-securitygroup**.

f. For **Actions**, choose **Delete security groups**, and then choose **Delete** on the confirmation page.

4. Delete the NAT gateway:

a. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

b. Choose **VPC Dashboard**, and then choose **NAT Gateways**.

c. Select the NAT gateway of the VPC that you created. Use the VPC ID to identify the correct NAT gateway.

d. For **Actions**, choose **Delete NAT gateway**.

e. On the confirmation page, enter **`delete`**, and then choose **Delete**.

5. Delete the VPC:

a. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.

b. Choose **VPC Dashboard**, and then choose **VPCs**.

c. Select the VPC that you want to delete, such as **tutorial-dual-stack-vpc**.

d. For **Actions**, choose **Delete VPC**.

The confirmation page shows other resources that are associated with the VPC that will also be deleted, including the subnets associated with it.

e. On the confirmation page, enter **`delete`**, and then choose **Delete**.

6. Release the Elastic IP addresses:

    a. Open the Amazon EC2 console at https://console.amazonaws.cn/ec2/.

    b. Choose **EC2 Dashboard**, and then choose **Elastic IPs**.

    c. Select the Elastic IP address that you want to release.

    d. For **Actions**, choose **Release Elastic IP addresses**.

    e. On the confirmation page, choose **Release**.

Quotas and constraints for Amazon Aurora

Following, you can find a description of the resource quotas and naming constraints for Amazon Aurora.

Topics

- Quotas in Amazon Aurora
- Naming constraints in Amazon Aurora
- Amazon Aurora size limits

Quotas in Amazon Aurora

Each Amazon account has quotas, for each Amazon Region, on the number of Amazon Aurora resources that can be created. After a quota for a resource has been reached, additional calls to create that resource fail with an exception.

The following table lists the resources and their quotas per Amazon Region.

Name	Default	Adjustable	Description
Authorizations per DB security group	Each supported Region: 20	No	Number of security group authorizations per DB security group
Custom endpoints per DB cluster	Each supported Region: 5	Yes	The maximum number of custom endpoints that you can create per Aurora DB cluster in this account in the current Region. This value reflects the highest number of custom endpoints in a DB cluster in the account. Other DB clusters in the account

Name	Default	Adjustable	Description
			might have a lower number of custom endpoints.
Custom engine versions	Each supported Region: 40	Yes	The maximum number of custom engine versions allowed in this account in the current Region
DB cluster parameter groups	Each supported Region: 50	Yes	The maximum number of DB cluster parameter groups
DB clusters	Each supported Region: 40	Yes	The maximum number of Aurora clusters allowed in this account in the current Region
DB instances	ap-south-1: 20 Each of the other supported Regions: 40	Yes	The maximum number of DB instances allowed in this account in the current Region
DB shard groups	Each supported Region: 5	Yes	The maximum number of DB shard groups for Aurora Limitless Database in this account in the current Region
DB subnet groups	ap-south-1: 20 Each of the other supported Regions: 50	Yes	The maximum number of DB subnet groups

Name	Default	Adjustable	Description
Data API HTTP request body size	Each supported Region: 4 Megabytes	No	The maximum size allowed for the HTTP request body.
Data API maximum concurrent cluster-secret pairs	Each supported Region: 30	No	The maximum number of unique pairs of Aurora Serverless v1 DB clusters and secrets in concurrent Data API requests for this account in the current Amazon Region.
Data API maximum concurrent requests	Each supported Region: 500	No	The maximum number of Data API requests to an Aurora Serverless v1 DB cluster that use the same secret and can be processed at the same time. Additional requests are queued and processed as in-process requests complete.
Data API maximum result set size	Each supported Region: 1 Megabytes	No	The maximum size of the database result set that can be returned by the Data API.
Data API maximum size of JSON response string	Each supported Region: 10 Megabytes	No	The maximum size of the simplified JSON response string returned by the RDS Data API.

Name	Default	Adjustable	Description
Data API requests per second	Each supported Region: 1,000 per second	No	The maximum number of requests to the Data API per second allowed for this account in the current Amazon Region. This quota only applies to Amazon Aurora Serverless v1 clusters.
Event subscriptions	Each supported Region: 20	Yes	The maximum number of event subscriptions
IAM roles per DB cluster	Each supported Region: 5	Yes	The maximum number of IAM roles associated with a DB cluster
IAM roles per DB instance	Each supported Region: 5	Yes	The maximum number of IAM roles associated with a DB instance
Integrations	Each supported Region: 100	No	The maximum number of integrations allowed in this account in the current Amazon Region
Manual DB cluster snapshots	Each supported Region: 100	Yes	The maximum number of manual DB cluster snapshots
Manual DB instance snapshots	Each supported Region: 100	Yes	The maximum number of manual DB instance snapshots
Option groups	Each supported Region: 20	Yes	The maximum number of option groups

Name	Default	Adjustable	Description
Parameter groups	ap-south-1: 20 Each of the other supported Regions: 50	Yes	The maximum number of parameter groups
Proxies	Each supported Region: 20	Yes	The maximum number of proxies allowed in this account in the current Amazon Region
Read replicas per primary	Each supported Region: 15	Yes	The maximum number of read replicas per primary DB instance. This quota cant be adjusted for Amazon Aurora.
Reserved DB instances	ap-south-1: 20 Each of the other supported Regions: 40	Yes	The maximum number of reserved DB instances allowed in this account in the current Amazon Region
Security groups	ap-south-1: 20 Each of the other supported Regions: 25	Yes	The maximum number of DB security groups
Subnets per DB subnet group	Each supported Region: 20	No	The maximum number of subnets per DB subnet group

Name	Default	Adjustable	Description
Total storage for all DB instances	Each supported Region: 100,000	Yes	The maximum total storage (in GB) on EBS volumes for all Amazon RDS DB instances added together. This quota does not apply to Amazon Aurora, which has a maximum cluster volume of 128 TiB for each DB cluster.

Note

By default, you can have up to a total of 40 DB instances. RDS DB instances, Aurora DB instances, Amazon Neptune instances, and Amazon DocumentDB instances apply to this quota.

If your application requires more DB instances, you can request additional DB instances by opening the Service Quotas console. In the navigation pane, choose **Amazon services**. Choose **Amazon Relational Database Service (Amazon RDS)**, choose a quota, and follow the directions to request a quota increase. For more information, see Requesting a quota increase in the *Service Quotas User Guide*.

For RDS for Oracle, you can create up to 15 read replicas per source DB instance in each Region, but we recommend limiting replicas to 5 to minimize replication lag.

Backups managed by Amazon Backup are considered manual DB clustersnapshots, but don't count toward the manual cluster snapshot quota. For information about Amazon Backup, see the *Amazon Backup Developer Guide*.

Amazon RDS also limits the rate of API requests for each Amazon Web Services account in each Amazon Region. These limits are separate from the resource quotas in the table and don't appear in Service Quotas. If you exceed them, API requests fail with a `ThrottlingException` error and the message `Rate exceeded`. For the default limits and how to request an increase, see Request throttling for the Amazon RDS API.

Naming constraints in Amazon Aurora

The naming constraints in Amazon Aurora are as follows:

- DB cluster identifier:
  - Must contain 1–63 alphanumeric characters or hyphens.
  - First character must be a letter.
  - Can't end with a hyphen or contain two consecutive hyphens.
  - Must be unique for all DB instances per Amazon account, per Amazon Region.
- Initial database name – Database name constraints differ between Aurora MySQL and Aurora PostgreSQL. For more information, see the available settings when creating each DB cluster.
- Master username – Master username constraints differ for each database engine. For more information, see the available settings when creating the DB cluster.
- Master password:
  - The password for the database master user can include any printable ASCII character except `/`, `'`, `"`, `@`, or a space.
  - The password can contain the following number of printable ASCII characters depending on the DB engine:
    - Aurora MySQL: 8–41
    - Aurora PostgreSQL: 8–99
- DB parameter group:
  - Must contain 1–255 alphanumeric characters.
  - First character must be a letter.
  - Hyphens are allowed, but the name cannot end with a hyphen or contain two consecutive hyphens.
- DB subnet group:
  - Must contain 1–255 characters.
  - Alphanumeric characters, spaces, hyphens, underscores, and periods are allowed.

Amazon Aurora size limits

Storage size limits

Aurora cluster volume maximum size varies by engine version:

256 TiB maximum:

- Aurora PostgreSQL versions:
  - 17.5 and all higher versions
  - 16.9 and higher
  - 15.13 and higher
- Aurora MySQL version 3.10 (compatible with MySQL 8.0.42) and higher

128 TiB maximum:

- All earlier Aurora PostgreSQL versions
- Aurora MySQL 3 versions lower than 3.10; Aurora MySQL version 2, versions 2.09 and higher

For more information on automatic storage scaling, see How Aurora storage automatically resizes.

To monitor the remaining storage space, you can use the `AuroraVolumeBytesLeftTotal` metric. For more information, see Cluster-level metrics for Amazon Aurora.

SQL table size limits

For an Aurora MySQL DB cluster, the maximum table size is 64 tebibytes (TiB). For an Aurora PostgreSQL DB cluster, the maximum table size is 32 tebibytes (TiB). We recommend that you follow table design best practices, such as partitioning of large tables.

Table space ID limits

The maximum table space ID for Aurora MySQL is 2147483647. If you frequently create and drop tables, make sure to be aware of your table space IDs and plan to use logical dumps. For more information, see Logical migration from MySQL to Amazon Aurora MySQL by using mysqldump.

Request throttling for the Amazon RDS API

Amazon RDS throttles API requests for each Amazon Web Services account in each Amazon Region. This helps the performance of the service and ensures fair usage for all Amazon RDS customers. Throttling ensures that requests to the Amazon RDS API don't exceed the maximum allowed API request limits. The request limits apply to API requests from any source, including the following.

- Your own application code using an Amazon SDK
- A command line tool, such as the Amazon CLI
- The Amazon Aurora console
- A third-party tool that uses your account's credentials, such as an infrastructure-as-code or monitoring tool

Amazon Aurora uses the Amazon RDS API, so the same limits apply to Aurora API requests.

If you use any Amazon RDS API operations and exceed the default limit for the number of calls per second, the Amazon RDS API issues an error like the following one.

ClientError: An error occurred (ThrottlingException) when calling the *API_name* operation: Rate exceeded.

This error means that your account exceeded its API request limit. By default, you can make up to 300 requests in a burst and a sustained 12 requests per second. To avoid this error, retry the request with exponential backoff, reduce your request rate, or request a limit increase. For more information, see Retries and exponential backoff, Reduce the number of API requests, and Request a limit increase.

Topics

- How throttling is applied
- Token bucket size and refill rate
- Retries and exponential backoff
- Reduce the number of API requests
- Identify the source of throttled requests
- View your current API limits
- Request a limit increase

How throttling is applied

Amazon RDS uses a token bucket to throttle API requests. Understanding how the bucket works helps you predict when throttling occurs and plan your request rate.

Your account has a *bucket* that holds a number of *tokens*. Each request spends one token, and Amazon RDS adds tokens back at a steady rate. The number of tokens in the bucket is the number of requests you can make at that moment.

Your account has one bucket for each Amazon Region, shared by all Amazon RDS API actions. Each request that you make removes one token from the bucket. Suppose the bucket size is 300 tokens. You can make up to 300 requests in one second. If you exceed 300 requests in a second, you are throttled and the remaining requests within that second fail.

Buckets automatically refill at a set rate. If the bucket is below its maximum capacity, Amazon RDS adds a set number of tokens back to it every second until it reaches its maximum capacity.

If the bucket is full when refill tokens arrive, the bucket discards them. The bucket can't hold more than its maximum number of tokens.

Suppose the bucket size is 300 tokens and the refill rate is 12 tokens per second. If you make 300 requests in one second, the bucket drops to zero (0) tokens.

The bucket then refills by 12 tokens every second. It reaches its maximum capacity of 300 tokens after 25 seconds if you make no requests during that time.

You don't need to wait for the bucket to be completely full before you can make API requests. You can use refill tokens as they are added to the bucket. If you deplete the bucket by making 300 requests in a second, you can continue to make 12 requests per second by using the refill tokens as they are added to the bucket. The bucket can refill to the maximum capacity only if you make fewer than 12 requests per second.

Amazon RDS separately limits requests that Amazon services, such as Amazon CloudFormation, make on your behalf. These requests don't consume tokens from your account's bucket.

Token bucket size and refill rate

The following table shows the default API request throttling limits for each Amazon Web Services account in each Amazon Region.

API actions	Bucket maximum capacity	Bucket refill rate (per second)
All Amazon RDS API actions	300	12

These are the default limits. If Amazon has increased the limits for your account, your limits are higher.

For more information about quotas on the number of Amazon RDS resources that you can create in your account, see Quotas in Amazon Aurora. For more information about Amazon RDS service endpoints and quotas, see Amazon Relational Database Service endpoints and quotas in the *Amazon Web Services General Reference*.

Retries and exponential backoff

Your application might need to retry an API request. For example:

- To check for an update in the status of a resource, such as a DB instance that is being created or modified
- To enumerate a large number of resources (for example, all your DB snapshots)
- To retry a request after it fails with a server error (5xx) or a throttling error

However, for a client error (4xx) other than a throttling error, revise the request to correct the problem before trying the request again.

Resource status changes

Before you start polling to check for status updates, give the request time to potentially complete. For example, wait a few minutes before checking whether your DB instance is available. When you begin polling, use an appropriate sleep interval between successive requests to lower the rate of API requests. For best results, use an increasing or variable sleep interval.

Alternatively, you can use Amazon EventBridge to notify you of the status of your resources instead of polling. For example, you can receive an event when a DB instance becomes available or when a snapshot finishes. For more information, see Creating a rule that triggers on an Amazon Aurora event.

Retries

When you need to poll or retry an API request, use an exponential backoff algorithm to calculate the sleep interval between requests. Wait progressively longer between retries. Set a maximum delay and a maximum number of retries. Add jitter (randomized delay) to prevent successive collisions. For implementation guidance, see Timeouts, retries, and backoff with jitter on the Amazon Builders' Library website.

Each Amazon SDK implements automatic retry logic, and retries `ThrottlingException` errors by default. For more information, see Retry behavior in the *Amazon SDKs and Tools Reference Guide*.

Reduce the number of API requests

Because all API actions share one bucket, reducing requests from any caller frees capacity for every other caller in your account. Before requesting a limit increase, consider the following.

Cache responses

: Information returned by `Describe*` actions, such as `DescribeDBInstances` and `DescribeDBClusters`, usually changes infrequently. Cache the results and reuse them instead of calling the API every time you need the information.

Limit your request rate on the client side

: Shape your outbound request rate to stay below the sustained rate before sending requests, rather than relying on retries after throttling.

Replace polling with events

: Use Amazon EventBridge to be notified of resource state changes instead of repeatedly calling `Describe*` actions.

Request only what you need

: Specify an identifier or use the `Filters` parameter so that a `Describe*` action returns only the resources you are interested in, and page through large result sets with `MaxRecords` and `Marker`.

Spread out scheduled requests

: If many workers, scheduled jobs, or monitoring agents call the API at the same moment, add a random delay to each so that requests are spread over time instead of arriving in a burst.

Identify the source of throttled requests

Amazon CloudTrail records every API request in your account. Each record shows you who made the request, which tool made it, and whether it succeeded. Use Amazon CloudTrail to find which users, roles, or tools make most of your requests. For more information about Amazon CloudTrail logging, see Monitoring Amazon Aurora API calls in Amazon CloudTrail.

View your current API limits

Service Quotas doesn't manage Amazon RDS API throttling limits, and they don't appear in the Service Quotas console. Unless Amazon has increased the limits for your account, the default limits apply. If your account has received an increase and you don't know your current limits, open a support case to confirm them.

Request a limit increase

You can request an increase for API throttling limits for your Amazon Web Services account by opening a support case. Limit increases aren't self-service, and Amazon doesn't approve them automatically. Amazon reviews your request and your recent traffic before applying a new limit. Allow time for the review and for the new limit to take effect.

Recommendations

Consider the following recommendations before you request an increase.

- Base your request on your measured peak request rate. Amazon reviews your traffic pattern before approving an increase.
- Prioritize increasing the bucket refill rate if you are throttled during sustained traffic. Increase the bucket maximum capacity if you are throttled during short bursts.
- Spread out scheduled jobs or groups of workers that start at the same time before you request an increase. Spreading requests out usually resolves the throttling without a limit increase.
- Submit requests for planned events, such as a migration or a large deployment, well before the event.

Open a support case

If you still need a higher limit after reviewing the recommendations, create a case in the Amazon Support Center console. If you haven't created a case before, see Creating support cases and case management in the *Amazon Support User Guide*.

To speed up the review, copy the following template into the case description. Replace *account_id*, *region*, and the other values with your own information:

```
Please increase the Amazon RDS API throttling limits for my account.
Account ID(s): account_id
Region(s): region
Description: use_case
API actions: api_actions
Time window: time_window
Changes already made: changes_made
Requested limits:
    Bucket maximum capacity: current_bucket_capacity -> requested_bucket_capacity
    Bucket refill rate: current_refill_rate -> requested_refill_rate
```

The template uses the following values.

account_id

The Amazon Web Services account ID, or IDs, that need the increase.

region

The Amazon Region, or Regions, where you are throttled.

use_case

Your use case and the tools that call the Amazon RDS API, such as your application, the Amazon CLI, an infrastructure-as-code tool, or a monitoring agent.

api_actions

The Amazon RDS API actions that generate most of your requests.

time_window

A one-hour window, in UTC, when you saw peak throttling or usage. For a planned event, the planned start and end dates.

changes_made

Anything you've already tried to reduce requests, such as retries with exponential backoff, caching, or less frequent polling.

current_bucket_capacity, *requested_bucket_capacity*

Your current and requested bucket maximum capacity (burst).

current_refill_rate, *requested_refill_rate*

Your current and requested bucket refill rate, in requests per second (sustained).

The more context you provide about your traffic, the faster Amazon can find the right limit for you.

Troubleshooting for Amazon Aurora

Use the following sections to help troubleshoot problems you have with DB instances in Amazon RDS and Amazon Aurora.

Topics

- Can't connect to Amazon RDS DB instance
- Amazon RDS security issues
- Resetting the DB instance owner password
- Amazon RDS DB instance outage or reboot
- Amazon RDS DB parameter changes not taking effect
- Freeable memory issues in Amazon Aurora
- Amazon Aurora MySQL replication issues

For information about debugging problems using the Amazon RDS API, see Troubleshooting applications on Aurora.

Can't connect to Amazon RDS DB instance

When you can't connect to a DB instance, the following are common causes:

- **Inbound rules** – The access rules enforced by your local firewall and the IP addresses authorized to access your DB instance might not match. The problem is most likely the inbound rules in your security group.

  By default, DB instances don't allow access. Access is granted through a security group associated with the VPC that allows traffic into and out of the DB instance. If necessary, add inbound and outbound rules for your particular situation to the security group. You can specify an IP address, a range of IP addresses, or another VPC security group.

  > **Note**
  >
  > When adding a new inbound rule, you can choose **My IP** for **Source** to allow access to the DB instance from the IP address detected in your browser.

For more information about setting up security groups, see Provide access to the DB cluster in the VPC by creating a security group.

> **Note**
>
> Client connections from IP addresses within the range 169.254.0.0/16 aren't permitted. This is the Automatic Private IP Addressing Range (APIPA), which is used for local-link addressing.

- **Public accessibility** – To connect to your DB instance from outside of the VPC, such as by using a client application, the instance must have a public IP address assigned to it.

  To make the instance publicly accessible, modify it and choose **Yes** under **Public accessibility**. For more information, see Hiding a DB cluster in a VPC from the internet.

- **Port** – The port that you specified when you created the DB instance can't be used to send or receive communications because of your local firewall restrictions. To determine if your network allows the specified port to be used for inbound and outbound communication, check with your network administrator.

- **Availability** – For a newly created DB instance, the DB instance has a status of `creating` until the DB instance is ready to use. When the state changes to `available`, you can connect to the DB instance. Depending on the size of your DB instance, it can take up to 20 minutes before an instance is available.

- **Internet gateway** – For a DB instance to be publicly accessible, the subnets in its DB subnet group must have an internet gateway.

  To configure an internet gateway for a subnet

  1. Sign in to the Amazon Web Services Management Console and open the Amazon RDS console at https://console.amazonaws.cn/rds/.
  2. In the navigation pane, choose **Databases**, and then choose the name of the DB instance.
  3. In the **Connectivity & security** tab, write down the values of the VPC ID under **VPC** and the subnet ID under **Subnets**.
  4. Open the Amazon VPC console at https://console.amazonaws.cn/vpc/.
  5. In the navigation pane, choose **Internet Gateways**. Verify that there is an internet gateway attached to your VPC. Otherwise, choose **Create Internet Gateway** to create an internet

gateway. Select the internet gateway, and then choose **Attach to VPC** and follow the directions to attach it to your VPC.

6. In the navigation pane, choose **Subnets**, and then select your subnet.
7. On the **Route Table** tab, verify that there is a route with `0.0.0.0/0` as the destination and the internet gateway for your VPC as the target.

   If you're connecting to your instance using its IPv6 address, verify that there is a route for all IPv6 traffic (`::/0`) that points to the internet gateway. Otherwise, do the following:

   a. Choose the ID of the route table (rtb-*xxxxxxxx*) to navigate to the route table.
   b. On the **Routes** tab, choose **Edit routes**. Choose **Add route**, use `0.0.0.0/0` as the destination and the internet gateway as the target.

      For IPv6, choose **Add route**, use `::/0` as the destination and the internet gateway as the target.
   c. Choose **Save routes**.

   Also, if you are trying to connect to IPv6 endpoint, make sure that client IPv6 address range is authorized to connect to the DB instance.

For more information, see Working with a DB cluster in a VPC.

Testing a connection to a DB instance

You can test your connection to a DB instance using common Linux or Microsoft Windows tools.

From a Linux or Unix terminal, you can test the connection by entering the following. Replace *DB-instance-endpoint* with the endpoint and *port* with the port of your DB instance.

```
nc -zv DB-instance-endpoint port
```

For example, the following shows a sample command and the return value.

```
nc -zv postgresql1.c6c8mn7fake0.us-west-2.rds.amazonaws.com 8299

  Connection to postgresql1.c6c8mn7fake0.us-west-2.rds.amazonaws.com 8299 port [tcp/
vvr-data] succeeded!
```

Windows users can use Telnet to test the connection to a DB instance. Telnet actions aren't supported other than for testing the connection. If a connection is successful, the action returns no message. If a connection isn't successful, you receive an error message such as the following.

```
C:\>telnet sg-postgresql1.c6c8mntfake0.us-west-2.rds.amazonaws.com 819

 Connecting To sg-postgresql1.c6c8mntfake0.us-west-2.rds.amazonaws.com...Could not
open
 connection to the host, on port 819: Connect failed
```

If Telnet actions return success, your security group is properly configured.

> **Note**
>
> Amazon RDS doesn't accept internet control message protocol (ICMP) traffic, including ping.

Troubleshooting connection authentication

In some cases, you can connect to your DB instance but you get authentication errors. In these cases, you might want to reset the master user password for the DB instance. You can do this by modifying the RDS instance.

Amazon RDS security issues

To avoid security issues, never use your Amazon Web Services account root user email address and password for a user account. Best practice is to use your root user to create users and assign those to DB user accounts. You can also use your root user to create other user accounts, if necessary.

For information about creating users, see Creating an IAM user in your Amazon Web Services account. For information about creating users in Amazon IAM Identity Center, see Manage identities in IAM Identity Center.

Error message "failed to retrieve account attributes, certain console functions may be impaired."

You can get this error for several reasons. It might be because your account is missing permissions, or your account hasn't been properly set up. If your account is new, you might not have waited

for the account to be ready. If this is an existing account, you might lack permissions in your access policies to perform certain actions such as creating a DB instance. To fix the issue, your administrator needs to provide the necessary roles to your account. For more information, see the IAM documentation.

Resetting the DB instance owner password

If you get locked out of your DB cluster, you can log in as the master user. Then you can reset the credentials for other administrative users or roles. If you can't log in as the master user, the Amazon account owner can reset the master user password. For details of which administrative accounts or roles you might need to reset, see Master user account privileges.

You can change the DB instance password by using the Amazon RDS console, the Amazon CLI command modify-db-instance, or by using the ModifyDBInstance API operation. For more information about modifying a DB instance in a DB cluster, see Modifying a DB instance in a DB cluster.

Amazon RDS DB instance outage or reboot

A DB instance outage can occur when a DB instance is rebooted. It can also occur when the DB instance is put into a state that prevents access to it, and when the database is restarted. A reboot can occur when you manually reboot your DB instance. A reboot can also occur when you change a DB instance setting that requires a reboot before it can take effect.

A DB instance reboot occurs when you change a setting that requires a reboot, or when you manually cause a reboot. A reboot can occur immediately if you change a setting and request that the change take effect immediately. Or it can occur during the DB instance's maintenance window.

A DB instance reboot occurs immediately when one of the following occurs:

- You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0. You then set **Apply Immediately** to `true`.
- You change the DB instance class, and **Apply Immediately** is set to `true`.

A DB instance reboot occurs during the maintenance window when one of the following occurs:

- You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0, and **Apply Immediately** is set to `false`.

- You change the DB instance class, and **Apply Immediately** is set to `false`.

When you change a static parameter in a DB parameter group, the change doesn't take effect until the DB instance associated with the parameter group is rebooted. The change requires a manual reboot. The DB instance isn't automatically rebooted during the maintenance window.

Amazon RDS DB parameter changes not taking effect

In some cases, you might change a parameter in a DB parameter group but don't see the changes take effect. If so, you likely need to reboot the DB instance associated with the DB parameter group. When you change a dynamic parameter, the change takes effect immediately. When you change a static parameter, the change doesn't take effect until you reboot the DB instance associated with the parameter group.

You can reboot a DB instance using the RDS console. Or you can explicitly call the `RebootDBInstance` API operation. You can reboot without failover if the DB instance is in a Multi-AZ deployment. The requirement to reboot the associated DB instance after a static parameter change helps mitigate the risk of a parameter misconfiguration affecting an API call. An example of this is calling `ModifyDBInstance` to change the DB instance class. For more information, see Modifying parameters in a DB parameter group in Amazon Aurora.

Freeable memory issues in Amazon Aurora

Freeable memory is the total random access memory (RAM) on a DB instance that can be made available to the database engine. It's the sum of the free operating-system (OS) memory and the available buffer and page cache memory. The database engine uses most of the memory on the host, but OS processes also use some RAM. Memory currently allocated to the database engine or used by OS processes isn't included in freeable memory. When the database engine is running out of memory, the DB instance can use the temporary space that is normally used for buffering and caching. As previously mentioned, this temporary space is included in freeable memory.

You use the `FreeableMemory` metric in Amazon CloudWatch to monitor the freeable memory. For more information, see Monitoring tools for Amazon Aurora.

If your DB instance consistently runs low on freeable memory or uses swap space, consider scaling up to a larger DB instance class. For more information, see Amazon AuroraDB instance classes.

You can also change the memory settings. For example, on Aurora MySQL , you might adjust the size of the `innodb_buffer_pool_size` parameter. This parameter is set by default to 75 percent of physical memory. For more MySQL troubleshooting tips, see How can I troubleshoot low freeable memory in an Amazon RDS for MySQL database?

For Aurora serverless, `FreeableMemory` represents the amount of unused memory that's available when the Aurora serverless DB instance is scaled to its maximum capacity. You might have the instance scaled down to relatively low capacity, but it still reports a high value for `FreeableMemory`, because the instance can scale up. That memory isn't available right now, but you can get it if you need it.

For every Aurora capacity unit (ACU) that the current capacity is below the maximum capacity, `FreeableMemory` increases by approximately 2 GiB. Thus, this metric doesn't approach zero until the DB instance is scaled up as high as it can.

If this metric approaches a value of `0`, the DB instance has scaled up as much as it can. It's nearing the limit of its available memory. Consider increasing the maximum ACU setting for the cluster. If this metric approaches a value of `0` on a reader DB instance, consider adding additional reader DB instances to the cluster. That way, the read-only part of the workload can be spread across more DB instances, reducing the memory usage on each reader DB instance. For more information, see Important Amazon CloudWatch metrics for Aurora serverless.

Amazon Aurora MySQL replication issues

Some MySQL replication issues also apply to Aurora MySQL. You can diagnose and correct these.

Topics

- Diagnosing and resolving lag between read replicas
- Diagnosing and resolving a MySQL read replication failure
- Replication stopped error
- Read replica replication fails to initialize metadata structure

Diagnosing and resolving lag between read replicas

After you create a MySQL read replica and the replica is available, Amazon RDS first replicates the changes made to the source DB instance from the time the read replica create operation started. During this phase, the replication lag time for the read replica is greater than 0. You can monitor

this lag time in Amazon CloudWatch by viewing the Amazon RDS `AuroraBinlogReplicaLag` metric.

The `AuroraBinlogReplicaLag` metric reports the value of the `Seconds_Behind_Master` field of the MySQL `SHOW REPLICA STATUS` command. For more information, see SHOW REPLICA STATUS Statement in the MySQL documentation.

When the `AuroraBinlogReplicaLag` metric reaches 0, the replica has caught up to the source DB instance. If the `AuroraBinlogReplicaLag` metric returns -1, replication might not be active. To troubleshoot a replication error, see Diagnosing and resolving a MySQL read replication failure. A `AuroraBinlogReplicaLag` value of -1 can also mean that the `Seconds_Behind_Master` value can't be determined or is `NULL`.

> **Note**
>
> Previous versions of Aurora MySQL used `SHOW SLAVE STATUS` instead of `SHOW REPLICA STATUS`. If you are using Aurora MySQL version 1 or 2, then use `SHOW SLAVE STATUS`. Use `SHOW REPLICA STATUS` for Aurora MySQL version 3 and higher.

The `AuroraBinlogReplicaLag` metric returns -1 during a network outage or when a patch is applied during the maintenance window. In this case, wait for network connectivity to be restored or for the maintenance window to end before you check the `AuroraBinlogReplicaLag` metric again.

The MySQL read replication technology is asynchronous. Thus, you can expect occasional increases for the `BinLogDiskUsage` metric on the source DB instance and for the `AuroraBinlogReplicaLag` metric on the read replica. For example, consider a situation where a high volume of write operations to the source DB instance occur in parallel. At the same time, write operations to the read replica are serialized using a single I/O thread. Such a situation can lead to a lag between the source instance and read replica.

For more information about read replicas and MySQL, see Replication implementation details in the MySQL documentation.

You can reduce the lag between updates to a source DB instance and the subsequent updates to the read replica by doing the following:

- Set the DB instance class of the read replica to have a storage size comparable to that of the source DB instance.

- Make sure that parameter settings in the DB parameter groups used by the source DB instance and the read replica are compatible. For more information and an example, see the discussion of the `max_allowed_packet` parameter in the next section.
- Disable the query cache. For tables that are modified often, using the query cache can increase replica lag because the cache is locked and refreshed often. If this is the case, you might see less replica lag if you disable the query cache. You can disable the query cache by setting the `query_cache_type parameter` to 0 in the DB parameter group for the DB instance. For more information on the query cache, see Query cache configuration.
- Warm the buffer pool on the read replica for InnoDB for MySQL. For example, suppose that you have a small set of tables that are being updated often and you're using the InnoDB or XtraDB table schema. In this case, dump those tables on the read replica. Doing this causes the database engine to scan through the rows of those tables from the disk and then cache them in the buffer pool. This approach can reduce replica lag. The following shows an example.

  For Linux, macOS, or Unix:

```
PROMPT> mysqldump \
    -h <endpoint> \
    --port=<port> \
    -u=<username> \
    -p <password> \
    database_name table1 table2 > /dev/null
```

  For Windows:

```
PROMPT> mysqldump ^
    -h <endpoint> ^
    --port=<port> ^
    -u=<username> ^
    -p <password> ^
    database_name table1 table2 > /dev/null
```

Diagnosing and resolving a MySQL read replication failure

Amazon RDS monitors the replication status of your read replicas. RDS updates the **Replication State** field of the read replica instance to `Error` if replication stops for any reason. You can review the details of the associated error thrown by the MySQL engines by viewing the **Replication Error** field. Events that indicate the status of the read replica are also generated, including RDS-

EVENT-0045, RDS-EVENT-0046, and RDS-EVENT-0057. For more information about events and subscribing to events, see Working with Amazon RDS event notification. If a MySQL error message is returned, check the error in the MySQL error message documentation.

Common situations that can cause replication errors include the following:

- The value for the `max_allowed_packet` parameter for a read replica is less than the `max_allowed_packet` parameter for the source DB instance.

  The `max_allowed_packet` parameter is a custom parameter that you can set in a DB parameter group. The `max_allowed_packet` parameter is used to specify the maximum size of data manipulation language (DML) that can be run on the database. In some cases, the `max_allowed_packet` value for the source DB instance might be larger than the `max_allowed_packet` value for the read replica. If so, the replication process can throw an error and stop replication. The most common error is `packet bigger than 'max_allowed_packet' bytes`. You can fix the error by having the source and read replica use DB parameter groups with the same `max_allowed_packet` parameter values.
- Writing to tables on a read replica. If you're creating indexes on a read replica, you need to have the `read_only` parameter set to *0* to create the indexes. If you're writing to tables on the read replica, it can break replication.
- Using a nontransactional storage engine such as MyISAM. Read replicas require a transactional storage engine. Replication is only supported for the following storage engines: InnoDB for MySQL or MariaDB.

  You can convert a MyISAM table to InnoDB with the following command:

  ```
  alter table <schema>.<table_name> engine=innodb;
  ```
- Using unsafe nondeterministic queries such as `SYSDATE()`. For more information, see Determination of safe and unsafe statements in binary logging in the MySQL documentation.

The following steps can help resolve your replication error:

- If you encounter a logical error and you can safely skip the error, follow the steps described in Skipping the current replication error. Your Aurora MySQL DB instance must be running a version that includes the `mysql_rds_skip_repl_error` procedure. For more information, see mysql_rds_skip_repl_error.

- If you encounter a binary log (binlog) position issue, you can change the replica replay position. You do so with the `mysql.rds_next_master_log` command for Aurora MySQL version 1 and 2. You do so with the `mysql.rds_next_source_log` command for Aurora MySQL version 3 and higher. Your Aurora MySQL DB instance must be running a version that supports this command to change the replica replay position. For version information, see mysql_rds_next_master_log.
- If you encounter a temporary performance issue because of high DML load, you can set the `innodb_flush_log_at_trx_commit` parameter to 2 in the DB parameter group on the read replica. Doing this can help the read replica catch up, though it temporarily reduces atomicity, consistency, isolation, and durability (ACID).
- You can delete the read replica and create an instance using the same DB instance identifier. This way, the endpoint remains the same as that of your old read replica.

If a replication error is fixed, the **Replication State** changes to **replicating**. For more information, see Troubleshooting a MySQL read replica problem.

Replication stopped error

When you call the `mysql.rds_skip_repl_error` command, you might receive an error message stating that replication is down or disabled.

This error message appears because replication is stopped and can't be restarted.

If you need to skip a large number of errors, the replication lag can increase beyond the default retention period for binary log files. In this case, you might encounter a fatal error because of binary log files being purged before they have been replayed on the replica. This purge causes replication to stop, and you can no longer call the `mysql.rds_skip_repl_error` command to skip replication errors.

You can mitigate this issue by increasing the number of hours that binary log files are retained on your replication source. After you have increased the binlog retention time, you can restart replication and call the `mysql.rds_skip_repl_error` command as needed.

To set the binlog retention time, use the mysql_rds_set_configuration procedure. Specify a configuration parameter of 'binlog retention hours' along with the number of hours to retain binlog files on the DB cluster, up to 2160 (90 days). The default for Aurora MySQL is 24 (1 day). The following example sets the retention period for binlog files to 48 hours.

```
CALL mysql.rds_set_configuration('binlog retention hours', 48);
```

Read replica replication fails to initialize metadata structure

When you attempted to start replication, you received the following error message:

```
Read Replica Replication Error - SQLError: 13124, reason: Replica failed to initialize
 applier metadata structure from the repository
```

This error occurs when there is a problem with the metadata structure of the replica. To fix the metadata structure, you must create a new replica.

To prevent this from happening in the future, perform one of the following actions:

- If possible, disable multi-threading on your replicas. Starting with MySQL 8.0.27, multi-threading is enabled by default.
- If you need to use multi-threading on your replicas, then we recommend that you use GTID-based replication. For more information, see Using GTID-based replication.

Amazon RDS API reference

In addition to the Amazon Web Services Management Console and the Amazon Command Line Interface (Amazon CLI), Amazon RDS also provides an API. You can use the API to automate tasks for managing your DB instances and other objects in Amazon RDS.

- For an alphabetical list of API operations, see Actions.
- For an alphabetical list of data types, see Data types.
- For a list of common query parameters, see Common parameters.
- For descriptions of the error codes, see Common errors.

For more information about the Amazon CLI, see Amazon Command Line Interface reference for Amazon RDS.

Topics

- Using the Query API
- Troubleshooting applications on Aurora

Using the Query API

The following sections briefly discuss the parameters and request authentication used with the Query API.

For general information about how the Query API works, see Query requests in the *Amazon EC2 API Reference.*

Query parameters

HTTP Query-based requests are HTTP requests that use the HTTP verb GET or POST and a Query parameter named `Action`.

Each Query request must include some common parameters to handle authentication and selection of an action.

Some operations take lists of parameters. These lists are specified using the `param.`*n* notation. Values of *n* are integers starting from 1.

For information about Amazon RDS Regions and endpoints, go to Amazon Relational Database Service (RDS) in the Regions and Endpoints section of the *Amazon Web Services General Reference*.

Query request authentication

You can only send Query requests over HTTPS, and you must include a signature in every Query request. You must use either Amazon signature version 4 or signature version 2. For more information, see Signature Version 4 signing process and Signature version 2 signing process.

Troubleshooting applications on Aurora

Amazon RDS provides specific and descriptive errors to help you troubleshoot problems while interacting with the Amazon RDS API.

Topics

- Retrieving errors
- Troubleshooting tips

For information about troubleshooting for Amazon RDS DB instances, see Troubleshooting for Amazon Aurora.

Retrieving errors

Typically, you want your application to check whether a request generated an error before you spend any time processing results. The easiest way to find out if an error occurred is to look for an `Error` node in the response from the Amazon RDS API.

XPath syntax provides a simple way to search for the presence of an `Error` node. It also provides a relatively easy way to retrieve the error code and message. The following code snippet uses Perl and the XML::XPath module to determine if an error occurred during a request. If an error occurred, the code prints the first error code and message in the response.

```
use XML::XPath;
    my $xp = XML::XPath->new(xml =>$response);
    if ( $xp->find("//Error") )
    {print "There was an error processing your request:\n", " Error code: ",
    $xp->findvalue("//Error[1]/Code"), "\n", " ",
    $xp->findvalue("//Error[1]/Message"), "\n\n"; }
```

Troubleshooting tips

We recommend the following processes to diagnose and resolve problems with the Amazon RDS API:

- Verify that Amazon RDS is operating normally in the Amazon Region that you're targeting by checking the Amazon Health Dashboard website.
- Check the structure of your request.

  Each Amazon RDS operation has a reference page in the *Amazon RDS API Reference*. Double-check that you are using parameters correctly. For ideas about what might be wrong, look at the sample requests or user scenarios to see if those examples do similar operations.
- Check Amazon re:Post.

  Amazon RDS has a development community where you can search for solutions to problems others have experienced along the way. To view the topics, go to Amazon re:Post.

Document history

Current API version: 2014-10-31

The following table describes important changes to the *Amazon Aurora User Guide*. For notification about updates to this documentation, you can subscribe to an RSS feed. For information about Amazon Relational Database Service (Amazon RDS), see the *Amazon Relational Database Service User Guide*.

> **Note**
>
> Before August 31, 2018, Amazon Aurora was documented in the *Amazon Relational Database Service User Guide*. For earlier Aurora document history, see Document history in the *Amazon Relational Database Service User Guide*.

Change	Description	Date
Aurora supports the db.r9g instance class	Added support for db.r9g instance class on Aurora. You can now create Aurora DB clusters that use the db.r9g instance class. For more information, see Aurora DB instance classes.	November 12, 2026
pgvector requirements for knowledge bases	Updated documentation for using Aurora PostgreSQL as a knowledge base for Amazon Bedrock to clarify the `pgvector` extension version requirements and the supported Regions. For more information, see Using Aurora PostgreSQL as a Knowledge Base for Amazon Bedrock and Supported	November 10, 2026

	features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine.	
Logical replication across major upgrades	Added information about retaining logical replication slots when you perform a major version upgrade of Aurora PostgreSQL DB clusters, which requires the `rds.logical_replication` parameter on the target version. For more information, see Upgrading Amazon Aurora PostgreSQL DB clusters.	November 10, 2026
Amazon RDS Data API array types	Added information about how Aurora PostgreSQL array types in the Amazon RDS Data API apply only to query results and can't be passed as `arrayValue` input parameters. For more information, see Using the Amazon RDS Data API.	November 10, 2026
Aurora Serverless v2 CPU pressure	Added information about CPU pressure as a cause of the `incompatible-parameters` status for Aurora Serverless v2 DB instances. For more information, see Performance and scaling for Aurora Serverless v2.	November 9, 2026

Aurora PostgreSQL upgrade targets	Updated documentation for the Aurora PostgreSQL major version upgrade targets to reflect the current supported versions. For more information, see Upgrading Amazon Aurora PostgreSQL DB clusters.	November 9, 2026
Query plan tracking prerequisites	Added information about the prerequisite that `pg_stat_statements` must be in the `shared_preload_libraries` parameter to track Aurora PostgreSQL query execution plans. For more information, see Monitoring query execution plans and peak memory for Aurora PostgreSQL.	November 7, 2026
Aurora PostgreSQL security and query plans	Updated documentation for Aurora PostgreSQL to clarify that you can create `INSTEAD OF` triggers only on views, and to add analysis of query execution plans in the Amazon CloudWatch Database Insights **Advanced** mode. For more information, see Security with Amazon Aurora PostgreSQL and Monitoring query execution plans and peak memory for Aurora PostgreSQL.	November 6, 2026

Analytics and Babelfish updates	Added documentation for the Babelfish ANTLR parse cache and temporary tables on read replicas, and updated documentation for querying Apache Iceberg and Parquet data directly in Aurora PostgreSQL. For more information, see Querying Apache Iceberg and Parquet data directly in Aurora PostgreSQL, Using ANTLR parse cache in Babelfish, Babelfish temporary tables on read replicas, Best practices , Configuration parameters, and Execution plan.	November 6, 2026
Aurora Serverless v2 version support	Added information about Aurora PostgreSQL 17.4 and 18.3 support for the 0–256 ACU capacity range in Aurora Serverless v2. For more information, see How Aurora Serverless v2 works.	November 5, 2026
pgstattuple_approx for large tables	Added information about using `pgstattuple_approx` instead of `pgstattuple` to diagnose bloat on large Aurora PostgreSQL tables with less I/O load. For more information, see Diagnosing table and index bloat.	November 4, 2026

Unsupported data types for upgrades	Added information about removing the `abstime`, `reltime`, and `tinterval` data types before a Aurora PostgreSQL major version upgrade to version 12 or later. For more information, see Upgrading Amazon Aurora PostgreSQL DB clusters.	November 4, 2026
FTS sync inconsistency precheck	Added information about the `auroraUpgradeCheckForFtsSyncInconsistency` precheck that detects InnoDB Full-Text Search sync inconsistencies before upgrading Aurora MySQL version 2 to version 3 and version 3 to version 8.4. For more information, see Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4 and Precheck descriptions for upgrading Aurora MySQL version 2 to version 3.	November 2, 2026
Capacity Reservation Blue/Green limitation	Added information about the limitation that Amazon Aurora On-Demand Capacity Reservations aren't supported with Amazon RDS Blue/Green Deployments. For more information, see Amazon Aurora On-Demand Capacity Reservations.	October 30, 2026

Aurora PostgreSQL 18 for Data API	Added information about Aurora PostgreSQL 18 support for the Amazon RDS Data API, including availability in the Amazon GovCloud (US) Regions. For more information, see Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine.	October 29, 2026
384 ACU maximum capacity	Updated documentation for Aurora Serverless v2 to reflect the new maximum capacity of 384 ACUs for Aurora PostgreSQL. For more information, see How Aurora Serverless v2 works, Creating a DB cluster that uses Aurora Serverless v2, and Requirements and limitations for Aurora Serverless v2.	October 23, 2026
tds_ssl_encrypt value mapping	Updated documentation for the `tds_ssl_encrypt` parameter in Babelfish to correct the value mapping, where `1` turns encryption on and `0` turns it off. For more information, see DB cluster parameter group settings for Babelfish.	October 22, 2026

db.serverless in preview environment	Added information about using the `db.serverless` instance class in the Aurora PostgreSQL database preview environment. For more information, see Working with the database preview environment.	October 20, 2026
Amazon Aurora On-Demand Capacity Reservations	Added documentation for Amazon Aurora On-Demand Capacity Reservations, which let you reserve compute capacity for your Aurora DB instances in specific Avai lability Zones. For more information, see Amazon Aurora On-Demand Capacity Reservations.	October 19, 2026
Aurora PostgreSQL analytics updates	Updated documentation for Aurora PostgreSQL analytics , including best practices for full query pushdown, monitoring and troublesh ooting, and querying Apache Iceberg and Parquet data. For more information, see Best practices, Execution plan, Monitoring and troublesh ooting, Querying Apache Iceberg and Parquet data directly in Aurora PostgreSQ L, How it works, and Prerequis ites.	October 17, 2026

Data API session management	Added information about how the Amazon RDS Data API resets session state when it reuses database connections, including releasing extension-owned state such as `dblink` connections. For more information, see Using the Amazon RDS Data API and Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine.	October 8, 2026
Higher `max_connections` for Aurora MySQL	Added information about the higher `max_connections` maximum of 50,000 for Aurora MySQL version 8.4.10 and higher. For more information, see Comparing Aurora MySQL version 3 and Aurora MySQL version 8.4 and Managing performance and scaling for Amazon Aurora MySQL.	October 7, 2026
`pg_columnmask` cursor and masking behavior	Added information about `pg_columnmask` cursor behavior and the shared plan cache masking limitation in Aurora PostgreSQL. For more information, see Using shared plan cache and Security with Amazon Aurora PostgreSQL.	October 6, 2026

Ruby driver support	Added information about the Amazon Advanced Ruby Wrapper driver for connecting to Aurora DB clusters. For more information, see Connecting to an Amazon Aurora DB cluster.	October 5, 2026
Babelfish limitations	Updated documentation for Babelfish limitations related to the Amazon RDS Data API, Amazon RDS Proxy, and querying Iceberg and Parquet data with Aurora PostgreSQL. For more information, see Babelfish limitations.	October 3, 2026
Cross-Region snapshot copy limit	Updated documentation for the limit of five in-progress cross-Region DB cluster snapshot copy requests to a single destination Region. For more information, see DB cluster snapshot copying.	October 2, 2026
Aurora PostgreSQL supports querying Apache Iceberg and Parquet data directly in Amazon S3	You can now query Apache Iceberg tables and Apache Parquet files in Amazon S3 directly from Aurora PostgreSQL using read-only foreign tables, without loading or copying the data. For more information, see Querying Apache Iceberg and Parquet data directly in Aurora PostgreSQL.	September 30, 2026

Subquery window transformation	Added information about subquery window transformation, which accelerates correlated aggregate subqueries in Aurora PostgreSQL by rewriting them as window functions. For more information, see Optimizing correlated subqueries in Aurora PostgreSQL.	September 29, 2026
Maximum cluster volume size increase	Updated documentation for the maximum Amazon Aurora MySQL cluster volume size, which can now grow up to 256 TiB depending on the engine version. For more information, see Migrating data to an Amazon Aurora MySQL DB cluster.	September 29, 2026
Babelfish XML and geospatial support	Added information about Babelfish support for the XML datatype methods `EXIST()` and `QUERY()`, the `MultiLineString` data type, and spatial indexes. For more information, see Babelfish supports XML datatype methods and Babelfish supports Geospatial data types.	September 29, 2026

Aurora Analytics reference	Added documentation for Aurora PostgreSQL analytics reference topics, including execution plans, SQL functions, and IAM policies. For more information, see Execution plan, How it works, IAM policies reference, Technical reference, and SQL functions reference.	September 29, 2026
Babelfish unsupported functionalities	Updated documentation for the list of unsupported T-SQL functionalities in Babelfish. For more information, see Unsupported functionalities in Babelfish.	September 28, 2026
Aurora supports the db.r8a instance class	Added support for db.r8a instance class on Aurora. You can now create Aurora DB clusters that use the db.r8a instance class. For more information, see Aurora DB instance classes.	September 25, 2026
Aurora PostgreSQL 18 Serverless v2 support	Added information about Aurora Serverless v2 support for Aurora PostgreSQL version 18 across Regions. For more information, see Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine.	September 24, 2026

Zero-ETL integration Region support	Added information about Aurora PostgreSQL zero-ETL integrations with Amazon Redshift and Amazon SageMaker AI, including version 18.3 and higher support. For more informati on, see Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine.	September 16, 2026
Related topic references	Added information about related topics for Aurora PostgreSQL and Aurora MySQL, including write forwarding, Babelfish, volume cloning, and performan ce troubleshooting. For more information, see Working with Amazon Aurora PostgreSQL, Using Babelfish for Aurora PostgreSQL, Working with Babelfish, Best practices with Amazon Aurora PostgreSQL, Cloning a v olume for an Amazon Aurora DB cluster, and Troublesh ooting Amazon Aurora MySQL database performance.	September 14, 2026

Aurora PostgreSQL 17.7 LTS release	Updated documentation for the Aurora PostgreSQL version 17.7 long-term support (LTS) release date. For more information, see Using an Aurora PostgreSQL long-term support (LTS) release.	September 14, 2026
Amazon RDS Proxy with global databases	Updated documentation for using Amazon RDS Proxy with Aurora global databases. For more information, see Connecting to Amazon Aurora Global Database.	September 10, 2026
Transaction timeout in Aurora MySQL	Added documentation for the `aurora_transaction_timeout` parameter, which sets the maximum duration for InnoDB transactions in Aurora MySQL. For more information, see Transaction timeout in Amazon Aurora MySQL.	September 2, 2026
Troubleshooting binary log replication lag	Added documentation for troubleshooting binary log replication lag when Aurora MySQL is configured as a binary log replica. For more information, see Troubleshooting binary log replication lag for Aurora MySQL.	August 24, 2026

Babelfish plan cache and geospatial	Added information about Babelfish shared plan cache support and the `Multipoint` geospatial data type and related spatial functions. For more information, see Using shared plan cache, Supported functionalities in Babelfish by version, and Babelfish supports Geospatial data types.	August 24, 2026
Database Insights and counter metrics	Updated documentation for Database Insights and the detailed per-query and database counter metrics, such as `DBLoadCPU`, available for Aurora Serverless v2 DB instances. For more information, see Best practices with Amazon Aurora, Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine, Performance and scaling for Aurora Serverless v2, cpu, io/socket/sql/client_connection, and io/table/sql/handler.	August 20, 2026

Aurora PostgreSQL 18 and Kerberos support	Added information about Aurora PostgreSQL 18 support for Aurora Global Database and Amazon RDS Proxy, and updated documentation for Kerberos authentication with Aurora MySQL. For more informati on, see Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine and Using Kerberos authentication for Aurora MySQL.	August 20, 2026
Express configuration for Aurora PostgreSQL	Added information about express configuration, which lets you create and query an Aurora PostgreSQL serverless database in seconds. For more information, see Getting started with Amazon Aurora.	August 6, 2026
Multi-source replication for Aurora MySQL	Added documentation for configuring multi-source replication, which lets an A mazon Aurora MySQL DB cluster receive binary log events from more than one source MySQL database. For more information, see Configure multi-source replication for Amazon Aurora MySQL.	July 31, 2026

In-memory relay log feature	Added information about the in-memory relay log feature, which you enable by setting `aurora_in_memory_relaylog` to `ON` in the DB cluster parameter group. For more information, see Replication with Amazon Aurora MySQL.	July 29, 2026
Delayed replication for Aurora MySQL	Added documentation for configuring delayed replication to maintain a time-lagged read replica for disaster recovery with Amazon Aurora MySQL. For more information, see Configure delayed replication with Amazon Aurora MySQL.	July 28, 2026
Documentation updates for Aurora topics	Updated documentation for point-in-time restore, parallel query, replication, DB cluster creation, and the Aurora query editor. For more information, see Restoring a DB cluster to a specified time, Parallel query for Amazon Aurora MySQL, Replication with Amazon Aurora MySQL, Replication with Amazon Aurora PostgreSQL, Creating an Amazon Aurora DB cluster, and Using the Aurora query editor.	July 14, 2026

Aurora Serverless v2 platform upgrades	Updated documentation for upgrading Aurora Serverless v2 to the latest platform version by applying pending maintenance, stopping and restarting the cluster, or using blue/green deployments. For more information, see How Aurora Serverless v2 works.	June 25, 2026
Transaction timeout in Aurora MySQL	Added documentation for the `aurora_transaction_timeout` parameter, which sets the maximum duration for InnoDB transactions in Aurora MySQL. For more information, see Transaction timeout in Amazon Aurora MySQL.	June 15, 2026
Allowed TLS ciphers for Aurora PostgreSQL	Added information about the allowed TLS ciphers for each Aurora PostgreSQL major version. For more information, see Security with Amazon Aurora PostgreSQL.	June 12, 2026
Aurora throughput performance	Updated documentation for Aurora throughput, which delivers up to 6x the throughput of stock PostgreSQL and up to 6x the throughput of stock MySQL on similar hardware. For more information, see What is Amazon Aurora?.	June 11, 2026

Setting up your Amazon account	Updated documentation for setting up your Amazon account and VPC environment for Amazon Aurora. For more information, see Setting up your environment for Amazon Aurora.	May 29, 2026
Aurora MySQL migration and upgrade	Added information about a migration precheck that identifies MyISAM tables, compressed tables, and tables with compressed pages, and updated documentation for major version upgrades to Aurora MySQL version 8.4. For more information, see Migrating data to an Amazon Aurora MySQL DB cluster and Upgrading the major version of an Amazon Aurora MySQL DB cluster.	May 21, 2026

Support for Aurora MySQL version 8.4	Added documentation for Aurora MySQL version 8.4, compatible with MySQL 8.4, including version comparisons, upgrade prechecks and procedures, post-upgrade cleanup, and security considerations such as the protected `rdsproxyadmin` user, and the `aurora_enable_memory_management` parameter that controls whether Aurora automatically manages memory recovery actions. For more information, see Comparing Aurora MySQL version 3 and Aurora MySQL version 8.4, Comparing Aurora MySQL version 8.4 and MySQL 8.4 Community Edition, Security considerations for upgrading from Aurora MySQL version 3 to version 8.4, Aurora MySQL version 8.4 compatible with MySQL 8.4, Security with Amazon Aurora MySQL, Upgrading the major version of an Amazon Aurora MySQL DB cluster, Precheck descriptions for upgrading Aurora MySQL version 3 to version 8.4, Precheck descriptions for upgrading Aurora MySQL version 2 to version	May 20, 2026

	3, Upgrading to Aurora MySQL version 8.4, Amazon Aurora MySQL reference, Post-upgrade cleanup for Aurora MySQL version 8.4, and Password policies and Password validation in Aurora MySQL.	
aws_default_logs_role for log publishing	Updated documentation for the aws_default_logs_role role used when publishing log data from your DB cluster to CloudWatch Logs with the server_audit_logs_upload parameter. For more information, see Publishing Amazon Aurora MySQL logs to Amazon CloudWatch Logs and Integrating Amazon Aurora MySQL with other Amazon services.	May 19, 2026
Increased Aurora cluster volume size	Updated documentation for the maximum Aurora cluster volume size, which increased from 128 TiB to 256 TiB. For more information, see What is Amazon Aurora?.	May 18, 2026

Aurora Serverless v2 reader scaling	Updated documentation for how an Aurora Serverless v2 reader determines its minimum and maximum capacity, including whether it follows its associated writer or scales independently. For more information, see How Aurora Serverless v2 works.	May 11, 2026
Aurora Auto Scaling availability requirement	Added information about how Aurora Auto Scaling only scales a DB cluster when all cluster instances are in the `available` state. For more information, see Amazon Aurora Auto Scaling with Aurora Replicas.	May 7, 2026
`evolve_plan_baselines` function behavior	Updated documentation for the `apg_plan_mgmt.evolve_plan_baselines()` function, which runs `EXPLAIN ANALYZE` on a captured query to compare its performance against the best approved plan for Aurora PostgreSQL. For more information, see Managing query execution plans for Aurora PostgreSQL.	April 30, 2026

Aurora MySQL version 8.4 security documentation	Added and updated documentation for security features in Aurora MySQL version 8.4, including authentication policy changes, password policies and the validate_password component, TLS and cipher suite updates, new dynamic privileges, upgrade considerations from version 3 to 8.4, differences between Aurora MySQL 8.4 and MySQL 8.4 Community Edition, new upgrade prechecks, and master user privilege updates. For more information, see Aurora MySQL version 8.4 compatible with MySQL 8.4, Comparing Aurora MySQL version 3 and version 8.4, Security considerations for upgrading from version 3 to 8.4, Comparing Aurora MySQL version 8.4 and MySQL 8.4 Community Edition, Password policies and Password validation, Security with Aurora MySQL, Aurora MySQL reference, Aurora MySQL upgrade precheck descriptions, Master user account privileges, and Password management with Amazon SageMaker AI.	April 20, 2026

Using shared plan cache	Added documentation for the shared plan cache in Aurora PostgreSQL, which lets backend processes share generic plans to reduce memory usage with the `apg_shared_plan_cache.enable` parameter. For more information, see Using shared plan cache.	April 16, 2026
Managing the Amazon RDS Data API	Updated documentation for enabling or disabling the Amazon RDS Data API on an existing database, and to reflect the deprecation of Aurora Serverless v1. For more information, see Using the Amazon RDS Data API.	April 16, 2026
Feature and Region availability updates	Updated documentation for Aurora Serverless v2 engine version support and Aurora Global Database availability in additional Amazon Regions. For more information, see Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine.	April 16, 2026

Express configuration for Aurora PostgreSQL	Added documentation for creating an Aurora PostgreSQL cluster with express configuration on the Amazon Free Tier, including supported Regions, prerequisite IAM permissions, and the `--express-configuration` parameter. For more information, see Getting started with Amazon Aurora.	April 16, 2026
Babelfish geospatial and XML support	Added information about Babelfish support for the polygon spatial data type with the `STPolyFromText` function and for XML datatype methods and procedures such as `OPENXML()`. For more information, see Babelfish supports Geospatial data types, Upgrading Amazon Aurora PostgreSQL DB clusters, and Babelfish supports XML datatype methods.	April 16, 2026

Aurora Serverless v1 deprecation	Updated documentation for Aurora Serverless v2 to reflect the deprecation of Aurora Serverless v1, including reader support and scaling behavior. For more information, see How Aurora Serverless v2 works and Performance and scaling for Aurora Serverless v2.	April 16, 2026
Aurora PostgreSQL wait events and reads	Added information about additional Aurora PostgreSQL wait events and Aurora Optimized Reads support for Graviton-based R8gd instances with NVMe storage. For more information, see Tuning with wait events for Aurora PostgreSQL and Improving query performance for Aurora PostgreSQL with Aurora Optimized Reads.	April 16, 2026

Aurora Limitless Database updates	Updated documentation for the Limitless Data Utility source configurations and added documentation for instance-specific performance and resource monitoring in Aurora PostgreSQL Limitless Database. For more information, see Loading data into Aurora PostgreSQL Limitless Database and Instance-specific performance and resource monitoring.	April 16, 2026
Aurora Global Database enhancements	Added documentation for using Aurora Global Database with Amazon Application Recovery Controller Region Switch and Amazon RDS Blue/Green Deployments, and for managed minor version upgrades across all Regions with a single `modify-global-cluster` operation. For more information, see Using Amazon Aurora Global Database and Supported features in Amazon Aurora by Amazon Web Services Region and Aurora DB engine.	April 16, 2026

New Aurora PostgreSQL LTS release	Updated documentation for the Aurora PostgreSQL long-term support (LTS) release, which is now PostgreSQL 17.7. For more information, see Using an Aurora PostgreSQL long-term support (LTS) release.	April 9, 2026
Aurora PostgreSQL upgrade target versions	Updated documentation for Aurora PostgreSQL DB cluster minor version upgrade target versions, including 17.6 and 16.10. For more information, see Upgrading Amazon Aurora PostgreSQL DB clusters.	March 30, 2026
Aurora PostgreSQL on Amazon Free Tier	Added information about using Aurora PostgreSQL on the Amazon Free Tier, including the cluster and storage restrictions that apply. For more information, see What is Amazon Aurora?.	March 25, 2026
Backup retention during restore	Updated documentation for specifying a backup retention period from 1 to 35 days when you create, modify, or restore an Aurora DB cluster. For more information, see Overview of backing up and restoring an Aurora DB cluster.	February 14, 2026

Monitoring Aurora Limitless Database	Updated documentation for monitoring Aurora PostgreSQL Limitless Database and added information about optimizing user-defined functions for single-shard execution to improve resource efficiency. For more information, see Monitoring Aurora PostgreSQL Limitless Database.	February 13, 2026
Blue/Green Deployments for global databases	Added information about using Amazon RDS Blue/Green Deployments with Aurora Global Database to perform upgrades and maintenance with minimal downtime. For more information, see Using Aurora PostgreSQL extensions with Babelfish and Using Amazon Aurora Global Database.	February 13, 2026
Delegated extension event trigger example	Updated documentation for Aurora PostgreSQL delegated extension support with an example event trigger that grants a delegated user access to extension objects. For more information, see Using Amazon Aurora delegated extension support for PostgreSQL.	December 5, 2025

Aurora PostgreSQL Zero-ETL integrations with Amazon SageMaker support additional Regions	Aurora PostgreSQL Zero-ETL integrations with Amazon SageMaker are now available in additional Regions. For more information, see Supported Regions and Aurora DB engines for zero-ETL integrations.	October 15, 2025
Aurora PostgreSQL Limitless Database available in an additional Amazon Region	Aurora PostgreSQL Limitless Database is now available in the Amazon GovCloud (US) Regions. For more information, see Aurora PostgreSQL Limitless Database requirements and considerations.	September 16, 2025
Amazon RDS Data API supports IPv6	Amazon RDS Data API now supports IPv6 connectivity, enabling you to connect to your Aurora databases using IPv6 addresses. For more information, see Using the Data API.	August 30, 2025
Amazon Aurora is available in the Asia Pacific (New Zealand) Region	Amazon Aurora is now available in the Asia Pacific (New Zealand) Region. For more information, see Regions and Availability Zones.	August 28, 2025

Amazon RDS Data API available in an additional Amazon Region	Amazon RDS Data API is now available in the Europe (Spain) Region. For more information, see Supported Regions and Aurora DB engines for RDS Data API.	August 1, 2025
Zero-ETL integrations with Amazon SageMaker lakehouse is generally available	Zero-ETL integrations make transactional data available in Amazon SageMaker within seconds of it being written to an Aurora MySQL DB instance. For more information, see Working with Aurora zero-ETL integrations.	June 30, 2025
Amazon Aurora is available in the Asia Pacific (Taipei) Region	Amazon Aurora is now available in the Asia Pacific (Taipei) Region. For more information, see Regions and Availability Zones.	June 5, 2025

End-of-life information for Performance Insights	Amazon has announced the end-of-life date for Performance Insights: November 30, 2025. After this date, Amazon RDS will no longer support the Performance Insights console experience, flexible retention periods, and their associated pricing. We recommend upgrading your DB clusters to Database Insights before this date. For more information, see Monitoring DB load with Performance Insights on Amazon Aurora.	May 30, 2025
Aurora PostgreSQL Limitless Database supports CloudWatch Database Insights	You can now use CloudWatch Database Insights to monitor your Amazon Aurora PostgreSQL Limitless Database at scale. For more information, see Monitoring Amazon Aurora PostgreSQL Limitless Database with CloudWatch Database Insights.	May 22, 2025

Viewing support dates for open source engine major versions	You can now view information about the start and end dates for open source engine major versions in RDS standard support and RDS Extended Support by using the Amazon CLI and the RDS API. For more information, see Viewing support dates for engine versions in Amazon RDS Extended Support.	May 20, 2025
Aurora PostgreSQL zero-ETL integrations support additional Regions	Aurora PostgreSQL zero-ETL integrations are now available in additional Regions. For more information, see Supported Regions and Aurora DB engines for zero-ETL integrations with Amazon Redshift.	February 17, 2025
Amazon Aurora is available in the Mexico (Central) Region	Amazon Aurora is now available in the Mexico (Central) Region. For more information, see Regions and Availability Zones.	January 14, 2025
Amazon Aurora is available in the Asia Pacific (Thailand) Region	Amazon Aurora is now available in the Asia Pacific (Thailand) Region. For more information, see Regions and Availability Zones.	January 7, 2025

End-of-life information for Aurora Serverless v1	Amazon has announced the end-of-life date for Aurora Serverless v1: March 31st, 2025. We strongly recommend upgrading any Aurora Serverless v1 DB clusters to Aurora serverless before that date. The upgrade can involve a change in the major version number of the database engine. Thus, it's important to plan, test, and implement this switchover before the end-of-life date. Starting January 8th, 2025, customers will no longer be able to create new Aurora Serverless v1 clusters or instances with either the Amazon Web Services Management Console or the CLI. For information about the upgrade procedure from Aurora Serverless v1 to Aurora serverless, see Upgrading from an Aurora Serverless v1 cluster to Aurora serverless.	December 6, 2024

Aurora supports CloudWatch Database Insights	You can now use CloudWatch Database Insights to monitor your Amazon Aurora DB clusters at scale. For more information, see Monitoring Amazon Aurora databases with CloudWatch Database Insights.	December 1, 2024
Amazon Aurora supports the db.r8g instance classes	You can now use the db.r8g instance classes to create Aurora DB clusters. For more information, see Aurora DB instance classes.	November 21, 2024
Aurora serverless supports automatic pause and resume	Aurora serverless DB instances can now scale all the way down to zero Aurora capacity units (ACUs) after a period of inactivity. To enable this feature, you set the minimum capacity value to 0 ACUs. For more information, see Automatic pause and resume for Aurora serverless.	November 20, 2024

Amazon Aurora supports auto-migrating EC2 databases	You can use the RDS console to migrate an EC2 database to Aurora. Aurora uses Amazon Database Migration Service (Amazon DMS) to migrate your source EC2 database. Amazon DMS allows you to migrate relational databases into your Amazon Web Services Cloud. For more information, see Auto migrating EC2 databases to Amazon Aurora using Amazon Database Migration Service.	November 20, 2024
Amazon Advanced NodeJS Wrapper generally available	The Amazon Web Services (Amazon) Advanced NodeJS Wrapper is complementary to and extends the functionality of an existing NodeJS driver. For more information, see Connecting to Aurora DB clusters with the Amazon drivers.	November 19, 2024
Amazon Aurora supports the db.r7i instance classes	You can now use the db.r7i instance classes to create Aurora DB clusters. For more information, see Aurora DB instance classes.	November 18, 2024

RDS Data API for Aurora MySQL supports all Performance Insights views	You can now use the **Top hosts** or **Top applications** views for Performance Insights to monitor SQL operations performed using RDS Data API for Aurora MySQL. For information about Performance Insights support, see Monitoring RDS Data API queries with Performance Insights.	October 31, 2024
Aurora PostgreSQL Limitless Database	Amazon Aurora PostgreSQL Limitless Database is a new, automated, horizontal scaling (sharding) capability of Amazon Aurora. Aurora PostgreSQL Limitless Database lets you scale beyond the existing Aurora limits for write throughput and storage by distributing a database workload over multiple Aurora writer instances, while maintaining the ability to use it as a single database. For more information, see Amazon Aurora PostgreSQL Limitless Database.	October 31, 2024

Amazon Aurora MySQL version 2 end of standard support	Aurora MySQL version 2 reached the end of standard support on October 31, 2024. For more information, see Preparing for Amazon Aurora MySQL-Compatible Edition version 2 end of standard support.	October 31, 2024
Amazon Aurora supports cluster-level OS upgrades	You can now apply Aurora operating system upgrades at the DB cluster level. Rolling upgrades automatically apply upgrades to a few reader DB instances at a time, thus preserving read availability. For more information, see Operating system updates for Aurora DB clusters.	October 30, 2024
Aurora global clusters support tagging	You can now add tags to Aurora global clusters. An Aurora global cluster is the parent resource that contains the primary and secondary DB clusters in an Aurora global database. For general information about tagging, see Tagging Aurora and Amazon RDS resources. For information about tagging with Aurora Global Database, see Tagging Aurora Global Database resources.	October 24, 2024

Aurora Global Database writer endpoints	Each Aurora Global Database now comes with a writer endpoint that is automatically updated by Aurora to route requests to the current writer instance of the primary DB cluster after an Aurora Global Database switchover and failover operation. To learn more about using the writer endpoint along with Aurora Global Database switchover and failover, see Using switchover or failover in Amazon Aurora Global Database.	October 22, 2024
Aurora PostgreSQL zero-ETL integrations with Amazon Redshift generally available	Zero-ETL integrations make transactional data available in Amazon Redshift within seconds of it being written to an Aurora PostgreSQL source DB cluster. The feature is now generally available. For more information, see Working with Aurora zero-ETL integrations with Amazon Redshift.	October 15, 2024
Aurora serverless supports 256 ACUs	You can now create Aurora serverless DB clusters with a maximum capacity of 256 Aurora capacity units (ACUs). For more information, see Aurora serverless capacity.	October 3, 2024

Amazon Aurora supports Console-to-Code	You can now use Console-to-Code to generate code from actions that you perform in the RDS console. The generated code can help you write code to automate your use of other Amazon services. For more information, see Use Console-to-Code to generate code for your Aurora console actions.	October 3, 2024
RDS Data API supports Performance Insights	You can now use Performance Insights to monitor SQL operations performed using RDS Data API. For information about Performance Insights support, see Monitoring RDS Data API queries with Performance Insights.	September 26, 2024
RDS Data API for Aurora serverless and provisioned is available for Aurora MySQL	RDS Data API is now available for Aurora MySQL clusters that use Aurora serverless or provisioned instances. For usage information for RDS Data API, see Using RDS Data API. For information about Aurora MySQL version and Amazon Region support for RDS Data API, see Data API with Aurora MySQL Serverless v2 and provisioned.	September 26, 2024

Amazon Aurora is available in the Asia Pacific (Malaysia) Region	Amazon Aurora is now available in the Asia Pacific (Malaysia) Region. For more information, see Regions and Availability Zones.	August 22, 2024
Update to existing policy	Amazon RDS removed `sns:Publish` permission from the `AmazonRDSBetaServiceRolePolicy` of the `AWSServiceRoleForRDSBeta` service-linked role. For more information, see Amazon RDS updates to Amazon managed policies.	August 7, 2024
Update to existing policy	Amazon RDS removed `sns:Publish` permission from the `AmazonRDSPreviewServiceRolePolicy` of the `AWSServiceRoleForRDSPreview` service-linked role. For more information, see Amazon RDS updates to Amazon managed policies.	August 7, 2024
Aurora serverless supports auto-pause (scale-to-zero)	Aurora serverless DB instances can now scale all the way down to zero Aurora capacity units (ACUs) after a period of inactivity. To enable this feature, you set the minimum capacity value to 0. For more information, see Using Aurora serverless.	July 25, 2024

Amazon ODBC Driver for MySQL generally available	The Amazon Web Services (Amazon) ODBC Driver for MySQL is a client driver designed for the high availability of Aurora MySQL. For more information, see Connecting to Aurora MySQL with the Amazon Web Services (Amazon) ODBC Driver for MySQL.	July 18, 2024
RDS Data API for Aurora serverless is available in more Regions	RDS Data API is now available for Aurora PostgreSQL in several additional Amazon Regions. For information about Region support for RDS Data API, see Data API with Aurora PostgreSQL Serverless v2 and provisioned.	July 9, 2024
Amazon Python Driver generally available	The Amazon Web Services (Amazon) Python Driver is designed as an advanced Python wrapper. This wrapper is complementary to and extends the functionality of the open-source Psycopg driver. For more information, see Connecting to Aurora DB clusters with the Amazon drivers.	May 23, 2024

Zero-ETL integrations available in China Regions	Zero-ETL integrations are now available in the Amazon Web Services Regions China (Beijing) and China (Ningxia) . For more information, see Zero-ETL integrations with Amazon Redshift.	May 21, 2024
RDS Proxy is available in more Regions	RDS Proxy is now available in the Asia Pacific (Hyderabad), Asia Pacific (Melbourne), Middle East (UAE), Israel (Tel Aviv), Canada West (Calgary) , and Europe (Zurich) regions. For more information about RDS Proxy, see Using Amazon RDS Proxy.	May 21, 2024
Amazon RDS supports fine-grained access for Performance Insights	You can now allow or deny access to individual dimensions in Performance Insights. This fine-grained access can be used for `GetResourceMetrics` , `DescribeDimensionKeys` , and `GetDimensionKeyDetails` actions. For more information, see https://docs.amazonaws.cn/AmazonRDS/latest/UserGuide/USER_PerfInsights.access-control.dimensionAccess-policy.html.	May 21, 2024

Amazon RDS Extended Support	Creating or restoring an Aurora MySQL version 2 or 3, or Aurora PostgreSQL version 11 database now automatically enrolls that database into Amazon RDS Extended Support so your existing applications continue to work as they are. You can opt out of RDS Extended Support to avoid charges after the Aurora end of standard support date for your database engine. For more information, see Using Amazon RDS Extended Support.	March 21, 2024
Data filtering for zero-ETL integrations	Amazon RDS supports data filtering at the database and table level for zero-ETL integrations with Amazon Redshift. For more information, see Data filtering for Aurora zero-ETL integrations with Amazon Redshift.	March 20, 2024
Aurora MySQL integrations with Amazon Bedrock	You can now integrate Amazon Aurora MySQL databases with Amazon Bedrock to power generative AI applications. For more information, see Using Amazon Aurora machine learning with Aurora MySQL.	March 8, 2024

New Amazon managed policy	Amazon RDS added a new managed policy named `AmazonRDSCustomInstanceProfileRolePolicy` to allow RDS Custom to perform automation actions and database management tasks through an EC2 instance profile. For more information, see Amazon RDS updates to Amazon managed policies.	February 27, 2024
Amazon RDS support for Amazon Secrets Manager in the Israel (Tel Aviv) Region	Amazon RDS supports Secrets Manager in the Israel (Tel Aviv) Region. For more information, see Password management with Amazon RDS and Amazon Secrets Manager.	February 21, 2024
Amazon RDS Extended Support	Amazon RDS now automatically enables Amazon RDS Extended Support when Aurora MySQL and Aurora PostgreSQL major engine versions in your DB clusters and global clusters reach the Aurora end of standard support date. For more information, see Using Amazon RDS Extended Support.	February 15, 2024

Aurora PostgreSQL 16.1 supports Babelfish for Aurora PostgreSQL 4.0.0	Aurora PostgreSQL 16.1 supports Babelfish 4.0.0. For a list of new features, see 16.1. For a list of features supported in each Babelfish release, see Supported functionality in Babelfish by version. For usage information, see Working with Babelfish for Aurora PostgreSQL.	January 31, 2024
Update to default CA Certificate	The default CA certificate is set to `rds-ca-rsa2048-g1`. For more information, see Using SSL/TLS to encrypt a connection to a DB cluster.	January 26, 2024
RDS Proxy is available in the Europe (Spain) Region	RDS Proxy is now available in the Europe (Spain) region. For more information about RDS Proxy, see Using Amazon RDS Proxy.	January 8, 2024
RDS Data API with Aurora PostgreSQL Aurora serverless and provisioned	You can now use RDS Data API with Aurora PostgreSQL Aurora serverless and provisioned DB clusters. With RDS Data API, you can access your Aurora clusters through a secure HTTP endpoint and run SQL statements without using database drivers or managing connections. For more information, see Using RDS Data API.	December 21, 2023

Aurora PostgreSQL integrations with Amazon Bedrock	You can now integrate Amazon Aurora PostgreSQL databases with Amazon Bedrock to power generative AI applications. For more information, see Using Amazon Aurora machine learning with Aurora PostgreSQL.	December 21, 2023
Amazon Aurora is available in the Canada West (Calgary) Region	Amazon Aurora is now available in the Canada West (Calgary) Region. For more information, see Regions and Availability Zones.	December 20, 2023
Amazon RDS supports viewing and responding to recommendations	Amazon Aurora recommendations now includes threshold based proactive and machine learning based reactive recommendations. For more information, see Recommendations for Amazon Aurora.	December 19, 2023

Aurora PostgreSQL zero-ETL integrations with Amazon Redshift (preview)	You can now create zero-ETL integrations with Amazon Redshift using an Aurora PostgreSQL source DB cluster. For the preview release, you must create all integrations in the Amazon RDS Database Preview Environment, in the US East (Ohio) (us-west-2) Amazon Web Services Region. For more information, see Working with Aurora zero-ETL integrations with Amazon Redshift.	November 28, 2023
Amazon Aurora PostgreSQL supports global database write forwarding	You can now enable write forwarding on secondary clusters in an Aurora PostgreSQL-based global database. For more information, see Using write forwarding in an Aurora PostgreSQL global database.	November 9, 2023
Aurora PostgreSQL support for Optimized Reads	You can achieve faster query processing for Aurora PostgreSQL with Aurora Optimized Reads. For more information, see Improving query performance for Aurora PostgreSQL with Aurora Optimized Reads.	November 8, 2023

Amazon RDS exports Performance Insights metrics to Amazon CloudWatch	Performance Insights lets you export the preconfigured or custom metrics dashboards to Amazon CloudWatch. The exported metrics dashboards are available to view in the CloudWatch console. You can also export a selected Performance Insights metric widget and view the metrics data in the CloudWatch console. For more information, see Exporting Performance Insights metrics to CloudWatch.	November 8, 2023
Aurora MySQL zero-ETL integrations with Amazon Redshift general availability	Zero-ETL integrations with Amazon Redshift are now generally available for Aurora MySQL. For more information, see Working with Aurora zero-ETL integrations with Amazon Redshift.	November 7, 2023
Aurora PostgreSQL support for RDS Blue/Green Deployments	You can now create a blue/green deployment from an Aurora PostgreSQL DB cluster. For more information, see Using Amazon RDS Blue/Green Deployments for database updates.	October 26, 2023

Aurora MySQL supports server-side encryption with Amazon KMS keys (SSE-KMS)	In Aurora MySQL version 3.05 and higher, you can use SSE-KMS, including Amazon managed keys and customer managed keys, for server-side encryption of data that you load from or save to Amazon S3. For more information, see Loading data into an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket and Saving data from an Amazon Aurora MySQL DB cluster from text files in an Amazon S3 bucket.	October 25, 2023
Aurora MySQL optimizations reduce database restart time	In Aurora MySQL version 3.05 and higher, we've introduced optimizations that reduce the database restart time. These optimizations provide up to 65% less downtime than without optimizations, and fewer disruptions to your database workloads, after a restart. For more information, see Optimizations to reduce database restart time.	October 25, 2023

Update to Amazon managed policies	The `AmazonRDSPerformanceInsightsReadOnly` and `AmazonRDSPerformanceInsightsFullAccess` managed policies now includes `Sid` (statement ID) as an identifier in the policy statement. For more information, see Amazon RDS updates to Amazon managed policies.	October 23, 2023
Amazon RDS publishes Performance Insights counter metrics to Amazon CloudWatch	The **DB_PERF_INSIGHTS** metric math function in the CloudWatch console allows you to query Amazon RDS for Performance Insights counter metrics. For more information, see Creating CloudWatch alarms to monitor Amazon Aurora.	September 20, 2023
Amazon Aurora supports point-in-time recovery (PITR) with Amazon Backup	You can now manage Aurora automated (continuous) backups in Amazon Backup and restore to specified times from them. For more information, see Restoring a DB cluster to a specified time using Amazon Backup.	September 7, 2023

Amazon RDS Extended Support	Amazon Aurora announces the upcoming ability to continue running Aurora MySQL and Aurora PostgreSQL major engine versions in your DB instances past the Aurora end of standard support date. For more information, see Using Amazon RDS Extended Support.	September 1, 2023
Amazon Aurora MySQL extends support for Percona XtraBackup	You can now perform physical migrations of MySQL 8.0 databases to Aurora MySQL version 3 DB clusters. For more information, see Physical migration from MySQL by using Percona XtraBackup and Amazon S3.	August 24, 2023

Aurora global database supports global database failover	Aurora global database now supports managed global failover, allowing you to more easily recover from a true Regional disaster or complete service-level outage. To learn more about this feature, see Performing managed failovers for Aurora global databases. The feature previously called "managed planned failover" is now called "switchover." For information about switchovers, see Performing switchovers for Amazon Aurora global databases.	August 21, 2023
Update to Amazon managed policy permissions	The `AmazonRDSFullAccess` managed policy has new permissions that allows you to generate, view, and delete the performance analysis report for a time period. For more information, see Amazon RDS updates to Amazon managed policies.	August 17, 2023

Update to Amazon managed policy permissions	The addition of new permissions to `AmazonRDSPerformanceInsightsReadOnly` managed policy and addition of new managed policy `AmazonRDSPerformanceInsightsFullAccess` allows you generate a DB load analysis report for a time period. For more information, see Amazon RDS updates to Amazon managed policies.	August 16, 2023
Amazon RDS supports DB load time period analysis with Performance Insights	Performance Insights allows you to create performance analysis reports for a specific period of time. The report provides the insights identified and recommendations to resolve the performance issues. For more information, see Analyzing DB load for a period of time.	August 16, 2023
Amazon Aurora supports retaining automated backups for DB clusters	You can now retain automated backups for deleted Aurora clusters and restore them to a specified point in time. For more information, see Retaining automated backups.	August 4, 2023

Amazon Aurora is available in the Israel (Tel Aviv) Region	Amazon Aurora is now available in the Israel (Tel Aviv) Region. For more information, see Regions and Availability Zones.	August 1, 2023
Amazon Aurora MySQL supports local (in-cluster) write forwarding	You can now forward write operations from a reader DB instance to a writer DB instance within an Aurora MySQL DB cluster. For more information, see Using write forwarding in an Amazon Aurora MySQL DB cluster.	July 31, 2023
Amazon Aurora supports Aurora serverless in an additional Amazon Web Services Region	You can now create Aurora serverless DB clusters in the Asia Pacific (Melbourne) Amazon Web Services Region. For information about Aurora serverless, see Using Aurora serverless.	June 28, 2023
Amazon Aurora introduces zero-ETL integrations with Amazon Redshift (preview)	Zero-ETL integrations provide a fully managed solution for making transactional data available in Amazon Redshift within seconds of it being written to an Aurora MySQL DB cluster. For more information, see Working with Aurora zero-ETL integrations with Amazon Redshift.	June 28, 2023

Amazon RDS provides combined Performance Insights and CloudWatch metrics view in the Performance Insights dashboard	Amazon RDS now provides a consolidated view of Performance Insights and CloudWatch metrics in the Performance Insights dashboard. For more information, see Viewing combined metrics with the Performance Insights dashboard.	May 24, 2023
Amazon Aurora supports the db.r7g instance classes	You can now use the db.r7g instance classes to create Aurora DB clusters. For more information, see Aurora DB instance classes.	May 11, 2023
Amazon Aurora supports a new DB cluster storage configuration	With Aurora I/O-Optimized, you pay only for the usage and storage of your DB clusters, with no additional charges for read and write I/O operations. For more information, see Storage configurations for Amazon Aurora DB clusters.	May 11, 2023
Amazon Aurora supports Aurora serverless in additional Amazon Web Services Regions	You can now create Aurora serverless DB clusters in the following Amazon Web Services Regions: Asia Pacific (Hyderabad), Europe (Spain) Europe (Zurich), and Middle East (UAE). For information about Aurora serverless, see Using Aurora serverless.	May 4, 2023

Aurora Serverless v1 supports conversion to provisioned	You can convert an Aurora Serverless v1 DB cluster directly to a provisioned DB cluster. For more informati on, see Converting an Aurora Serverless v1 DB cluster to provisioned.	April 27, 2023
Aurora Serverless v1 supports Amazon Aurora PostgreSQL version 13	You can now create Aurora Serverless v1 DB clusters that run Aurora PostgreSQL ve rsion 13. For more informati on, see Aurora Serverless v1.	April 27, 2023
Amazon Aurora support for Amazon Secrets Manager in the China Regions	Amazon Aurora supports Secrets Manager in the China (Beijing) and China (Ningxia) Regions. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager.	April 20, 2023
Amazon Aurora supports publishing events with tags to topic subscribers	Amazon Aurora event notifications sent to Amazon Simple Notification Service (Amazon SNS) or Amazon EventBridge now contain event tags in the message body. These tags provide the resource data that was affected by the service event. For more information, see Amazon RDS event notificat ion tags and attributes.	April 17, 2023

Update to IAM service-linked role permissions	The `AmazonRDSFullAccess` and `AmazonRDSReadOnlyAccess` policies now grants additional permissions to allow the display of Amazon DevOps Guru findings in the RDS console. For more information, see Amazon RDS updates to Amazon managed policies.	March 30, 2023
Amazon Aurora supports global databases in the Asia Pacific (Melbourne) Region	You can now create Aurora global databases in the Asia Pacific (Melbourne) Region. For information about Aurora global databases, see Using Amazon Aurora global databases.	March 22, 2023
Update to Amazon managed policy permissions	The `AmazonRDSFullAccess` and `AmazonRDSReadOnlyAccess` policies now grants additional permissions to Amazon CloudWatch. For more information, see Amazon RDS updates to Amazon managed policies.	March 16, 2023
RDS Proxy is available in the China Regions	RDS Proxy is now available in the China (Beijing) and China (Ningxia) regions. For more information about RDS Proxy, see Using Amazon RDS Proxy.	March 15, 2023

Amazon Aurora supports Aurora serverless in the China Regions	Aurora serverless is now available in the China (Beijing) and China (Ningxia) Regions. For more information, see Aurora serverless.	March 15, 2023
RDS Proxy is available in the Asia Pacific (Jakarta) Region	RDS Proxy is now available in the Asia Pacific (Jakarta) Region. For more information about RDS Proxy, see Using Amazon RDS Proxy.	March 8, 2023
Amazon Aurora MySQL supports Kerberos authentication	You can now use Kerberos authentication to authenticate users when they connect to your Aurora MySQL DB clusters. For more information, see Using Kerberos authentication for Aurora MySQL.	March 8, 2023
Amazon Aurora supports global databases in additional Amazon Web Services Regions	You can now create Aurora global databases in the following Regions: Africa (Cape Town), Asia Pacific (Hong Kong), Asia Pacific (Hyderabad), Asia Pacific (Jakarta), Europe (Milan), Europe (Spain) Europe (Zurich), Middle East (Bahrain), and Middle East (UAE). For information about Aurora global databases, see Using Amazon Aurora global databases.	March 6, 2023

Amazon Aurora supports copying DB cluster snapshots in additional Amazon Web Services Regions	You can now copy DB cluster snapshots in the following Regions: Africa (Cape Town), Asia Pacific (Hong Kong), Asia Pacific (Hyderabad), Asia Pacific (Jakarta), Asia Pacific (Melbourne), Europe (Milan), Europe (Spain) Europe (Zurich), Middle East (Bahrain), and Middle East (UAE). For information about copying DB cluster snapshots , see Copying a DB cluster snapshot.	March 6, 2023
Amazon DevOps Guru for RDS supports proactive insights	Amazon DevOps Guru for RDS publishes proactive insights with recommendations to help you address issues in your Aurora databases before they are predicted to happen. For more information, see How DevOps Guru for RDS works.	February 28, 2023
Amazon Aurora MySQL version 1 is deprecated	Aurora MySQL version 1 (compatible with MySQL 5.6) has been deprecated. For more information, see How long Amazon Aurora major versions remain available.	February 28, 2023

Aurora Serverless v1 supports setting the DB cluster maintenance window	You can now set the maintenance window for Aurora Serverless v1 DB clusters. For more information, see Adjusting the preferred DB cluster maintenance window.	February 27, 2023
Amazon Aurora supports Database Activity Streams in the Asia Pacific (Hyderabad), Europe (Spain), and Middle East (UAE) Regions.	For more information, see Database Activity Streams.	January 27, 2023
Amazon Aurora is available in the Asia Pacific (Melbourne) Region	Amazon Aurora is now available in the Asia Pacific (Melbourne) Region. For more information, see Regions and Availability Zones.	January 23, 2023
Specify certificate authority (CA) during DB cluster creation	You can now specify which CA to use for a DB cluster's server certificate during DB cluster creation. For more information, see Certificate authorities.	January 5, 2023

Aurora MySQL 3.* support for backtracking	Aurora MySQL 3.* versions now offer a quick way to recover from user errors, such as dropping the wrong table or deleting the wrong row. Backtrack allows you to move your database to a prior point in time without needing to restore from a backup, and it completes within seconds, even for large databases. For details, see Backtracking an Aurora DB cluster.	January 4, 2023
Use Amazon RDS Blue/Green Deployments available in additional Amazon Web Services Regions	The Blue/Green Deployments feature is now available in the China (Beijing) and China (Ningxia) Regions. For more information, see Using Amazon RDS Blue/Green Deployments for database updates.	December 22, 2022
Update to IAM service-linked role permissions	The AmazonRDSServiceRolePolicy policy now grants additional permissions to Amazon Secrets Manager. For more information, see Amazon RDS updates to Amazon managed policies.	December 22, 2022

Amazon Aurora integrates with Amazon Secrets Manager for password management	Aurora can manage the master user password for a DB cluster in Secrets Manager. For more information, see Password management with Amazon Aurora and Amazon Secrets Manager.	December 22, 2022
Amazon Aurora supports Aurora serverless in additional Amazon Web Services Regions	Aurora serverless is now available in the Africa (Cape Town) and Europe (Milan) Regions. For more information, see Aurora serverless.	December 21, 2022
Aurora PostgreSQL supports RDS Proxy with PostgreSQL 14	You can now create an RDS Proxy with an Aurora PostgreSQL 14 DB cluster. For more information about RDS Proxy, see Using Amazon RDS Proxy.	December 13, 2022
Amazon Aurora alerts you to recent anomalies detected by Amazon DevOps Guru	The database details page of the console alerts you both to current and anomalies that occurred in the past 24 hours. For more information, see How DevOps Guru for RDS works.	December 13, 2022
Amazon RDS Proxy supports global databases	You can now use RDS Proxy with Aurora global databases. For more information, see Using RDS Proxy with Aurora global databases.	December 7, 2022

Aurora PostgreSQL DB clusters support Trusted Language Extensions for PostgreSQL	Trusted Language Extensions for PostgreSQL is an open source development kit that allows you to build high performance PostgreSQL extensions and safely run them on your Aurora PostgreSQL DB cluster. For more information, see Working with Trusted Language Extensions for PostgreSQL.	November 30, 2022
Amazon GuardDuty RDS Protection monitors for access threats	When you turn on GuardDuty RDS Protection, GuardDuty consumes RDS login events from your Aurora databases, monitors these events, and profiles them for potential insider threats or external actors. When GuardDuty RDS Protection detects a potential threat, GuardDuty generates a new finding with details about the potentially compromised database. For more information, see Monitoring threats with GuardDuty RDS Protection.	November 30, 2022

Use Amazon RDS Blue/Green Deployments for database updates	You can make changes to a DB cluster in a staging environment and test the changes without affecting your production DB cluster. When you are ready, you can promote the staging environment to be the new production environment, with minimal downtime. For more information, see Using Amazon RDS Blue/Green Deployments for database updates.	November 27, 2022
Amazon Aurora is available in the Asia Pacific (Hyderabad) Region	Amazon Aurora is now available in the Asia Pacific (Hyderabad) Region. For more information, see Regions and Availability Zones.	November 22, 2022
Amazon Aurora is available in the Europe (Spain) Region	Amazon Aurora is now available in the Europe (Spain) Region. For more information, see Regions and Availability Zones.	November 16, 2022
Amazon Aurora is available in the Europe (Zurich) Region	Amazon Aurora is now available in the Europe (Zurich) Region. For more information, see Regions and Availability Zones.	November 9, 2022

Amazon Aurora supports exporting data to Amazon S3 from DB clusters	You can now export Aurora cluster data directly to S3, without having to create a snapshot first. For more information, see Exporting DB cluster data to Amazon S3.	October 27, 2022
Amazon Aurora MySQL supports faster exports to Amazon S3	You can now see up to 10x faster performance for exporting DB cluster snapshot data to S3 for MySQL 5.7- and 8.0-compatible Aurora MySQL clusters. For more information, see Exporting DB cluster snapshot data to Amazon S3.	October 20, 2022
Amazon Aurora supports automatically setting up connectivity between an Aurora DB cluster and an EC2 instance	You can use the Amazon Web Services Management Console to set up connectivity between an existing Aurora DB cluster and an EC2 instance. For more information, see Connecting an EC2 instance and an Aurora DB cluster automatically.	October 14, 2022
Amazon JDBC Driver for PostgreSQL generally available	The Amazon JDBC Driver for PostgreSQL is a client driver designed for Aurora PostgreSQL. The Amazon JDBC Driver for PostgreSQL is now generally available. For more information, see Connecting with the Amazon JDBC Driver for PostgreSQL.	October 6, 2022

Amazon Aurora supports in-place upgrade for MySQL 5.7-compatible Aurora MySQL	You can perform an in-place upgrade to change an existing MySQL 5.7-compatible Aurora MySQL cluster into a MySQL 8.0-compatible Aurora MySQL cluster. For more information, see Upgrading from Aurora MySQL 2.x to 3.x.	September 26, 2022
Performance Insights shows the top 25 SQL queries	In the Performance Insights dashboard, the **Top SQL** tab shows the 25 SQL queries that are contributing the most to DB load. For more information, see Overview of the Top SQL tab.	September 13, 2022
Aurora MySQL supports a new DB instance class	You can now use the db.r6i DB instance class for Aurora MySQL DB clusters. For more information, see DB instance classes.	September 13, 2022
Amazon Aurora is available in the Middle East (UAE) Region	Amazon Aurora is now available in the Middle East (UAE) Region. For more information, see Regions and Availability Zones.	August 30, 2022

Amazon Aurora supports automatically setting up connectivity with an EC2 instance	When you create an Aurora DB cluster, you can use the Amazon Web Services Management Console to set up connectivity between an Amazon Elastic Compute Cloud instance and the new DB cluster. For more information, see Configure automatic network connectivity with an EC2 instance.	August 22, 2022
Amazon Aurora supports dual-stack mode	DB clusters can now run in dual-stack mode. In dual-stack mode, resources can communicate with the DB cluster over IPv4, IPv6, or both. For more information, see Amazon Aurora IP addressing.	August 17, 2022
Amazon Aurora supports in-place upgrade for PostgreSQL-compatible Aurora Serverless v1	You can perform an in-place upgrade for a PostgreSQL 10-compatible Aurora Serverless v1 cluster to change an existing cluster into a PostgreSQL 11-compatible Aurora Serverless v1 cluster. For the in-place upgrade procedure, see Modifying an Aurora Serverless v1 DB cluster.	August 8, 2022

Performance Insights supports the Asia Pacific (Jakarta) Region	Formerly, you couldn't use Performance Insights in the Asia Pacific (Jakarta) Reg ion. This restriction has been removed. For more informati on, see Amazon Web Services Region support for Performan ce Insights.	July 21, 2022
Amazon Aurora supports a new DB instance class	You can now use the db.r6i DB instance class for Aurora PostgreSQL DB clusters. For more information, see DB instance classes.	July 14, 2022
RDS Performance Insights supports additional retention periods	Previously, Performance Insights offered only two retention periods: 7 days (default) or 2 years (731 days). Now, if you need to retain your performance d ata for longer than 7 days, you can specify from 1–24 months. For more informat ion, see Pricing and data retention for Performance Insights.	July 1, 2022

Amazon Aurora supports in-place upgrade for MySQL-compatible Aurora Serverless v1	You can perform an in-place upgrade for a MySQL 5.6-compatible Aurora Serverless v1 cluster to change an existing cluster into a MySQL 5.7-compatible Aurora Serverless v1 cluster. For the in-place upgrade procedure, see Modifying an Aurora Serverless v1 DB cluster.	June 16, 2022
Aurora supports turning on Amazon DevOps Guru in the RDS console	You can turn on DevOps Guru coverage for your Aurora databases from within the RDS console. For more information, see Setting up DevOps Guru for RDS.	June 9, 2022
Amazon Aurora supports publishing events to encrypted Amazon SNS topics	Amazon Aurora can now publish events to Amazon Simple Notification Service (Amazon SNS) topics that have server-side encryption (SSE) enabled, for additional protection of events that carry sensitive data. For more information, see Subscribing to Amazon RDS event notification.	June 1, 2022

Amazon RDS publishes usage metrics to Amazon CloudWatch	The `AWS/Usage` namespace in Amazon CloudWatch includes account-level usage metrics for your Amazon RDS service quotas. For more information, see Amazon CloudWatch usage metrics for Amazon Aurora.	April 28, 2022
Data API result sets in JSON format	An optional parameter for the `ExecuteStatement` function causes the query result set to be returned as a string in JSON format. The JSON result set is simple and convenient to transform into a data structure in your application's language. For more information, see Processing query results in JSON format.	April 27, 2022
Amazon Aurora serverless is now generally available	Amazon Aurora serverless is generally available for all users. For more information, see Using Aurora serverless.	April 21, 2022
Aurora MySQL supports configurable cipher suites	With Aurora MySQL, you can now use configurable cipher suites to control the connection encryption that your database server accepts. For more information, see Configuring cipher suites for connections to Aurora MySQL DB clusters.	April 15, 2022

Aurora PostgreSQL supports RDS Proxy with PostgreSQL 13	You can now create an RDS Proxy with an Aurora PostgreSQL 13 DB cluster. For more information about RDS Proxy, see Using Amazon RDS Proxy.	April 4, 2022
Release Notes for Aurora PostgreSQL	There is now a separate guide for the Amazon Aurora PostgreSQL release notes. For more information, see *Release Notes for Aurora PostgreSQL*.	March 22, 2022
Release Notes for Aurora MySQL	There is now a separate guide for the Amazon Aurora MySQL release notes. For more information, see *Release Notes for Aurora MySQL*.	March 22, 2022
Aurora PostgreSQL supports multi-major version upgrades	You can now perform version upgrades of Aurora PostgreSQL DB clusters across multiple major versions. For more information, see How to perform a major version upgrade.	March 4, 2022

Aurora PostgreSQL supports configurable cipher suites	With Aurora PostgreSQL versions 11.8 and higher, you can now use configurable cipher suites to control the connection encryption that your database server accepts. For information about using configurable cipher suites with Aurora PostgreSQL, see Configuring cipher suites for connections to Aurora PostgreSQL DB clusters.	March 4, 2022
Amazon JDBC Driver for MySQL generally available	The Amazon JDBC Driver for MySQL is a client driver designed for the high availability of Aurora MySQL. The Amazon JDBC Driver for MySQL is now generally available. For more information, see Connecting with the Amazon Web Services JDBC Driver for MySQL.	March 2, 2022
Aurora PostgreSQL 13.5 supports Babelfish for Aurora PostgreSQL 1.1.0	Aurora PostgreSQL 13.5 supports Babelfish 1.1.0. For a list of new features, see 13.5. For a list of features supported in each Babelfish release, see Supported functionality in Babelfish by version. For usage information, see Working with Babelfish for Aurora PostgreSQL.	February 28, 2022

Amazon Aurora supports Database Activity Streams in the Asia Pacific (Jakarta) Region	For more information, see Support for Amazon Web Services Regions for database activity streams.	February 16, 2022
Performance Insights supports new API operations	Performance Insights now supports the following API operations: `GetResourceMetadata`, `ListAvailableResourceDimensions`, and `ListAvailableResourceMetrics`. For more information, see Retrieving metrics with the Performance Insights API in this manual and the *Amazon RDS Performance Insights API Reference*.	January 12, 2022
Amazon RDS Proxy supports events	RDS Proxy now generates events that you can subscribe to and view in CloudWatch Events or configure to send to Amazon EventBridge. For more information, see Working with RDS Proxy events.	January 11, 2022

RDS Proxy available in additional Amazon Web Services Regions	RDS Proxy is now available in the following Regions: Africa (Cape Town), Asia Pacific (Hong Kong), Asia Pacific (Osaka), Europe (Milan), Europe (Paris), Europe (Stockholm), Middle East (Bahrain), and South America (São Paulo). For more information about RDS Proxy, see Using Amazon RDS Proxy.	January 5, 2022
Amazon Aurora is available in the Asia Pacific (Jakarta) Region	Amazon Aurora is now available in the Asia Pacific (Jakarta) Region. For more information, see Regions and Availability Zones.	December 13, 2021
DevOps Guru for Amazon RDS provides detailed insights and recommendations for Amazon Aurora	DevOps Guru for RDS mines Performance Insights for performance-related data. Using this data, the service analyzes the performance of your Amazon Aurora DB instances and can help you resolve performance issues. To learn more, see Analyzing performance anomalies with DevOps Guru for RDS in this guide and see Overview of DevOps Guru for RDS in the *Amazon DevOps Guru User Guide*.	December 1, 2021

Aurora PostgreSQL supports RDS Proxy with PostgreSQL 12	You can now create an RDS Proxy with an Aurora PostgreSQL 12 database cluster. For more information about RDS Proxy, see Using Amazon RDS Proxy.	November 22, 2021
Aurora supports Amazon Graviton2 instance classes for Database Activity Streams	You can use database activity streams with the db.r6g instance class for Aurora MySQL and Aurora PostgreSQL. For more information, see Supported DB instance classes.	November 3, 2021
Amazon Aurora support for cross-account Amazon KMS keys	You can use a KMS key from a different Amazon Web Services account for encryption when exporting DB snapshots to Amazon S3. For more information, see Exporting DB snapshot data to Amazon S3.	November 3, 2021
Amazon Aurora supports Babelfish for Aurora PostgreSQL	Babelfish for Aurora PostgreSQL extends your Amazon Aurora PostgreSQL-Compatible Edition database with the ability to accept database connections from Microsoft SQL Server clients. For more information, see Working with Babelfish for Aurora PostgreSQL.	October 28, 2021

Aurora Serverless v1 can require SSL for connections	The Aurora cluster parameters `force_ssl` for PostgreSQL and `require_secure_transport` for MySQL are supported now for Aurora Serverless v1. For more information, see Using TLS/SSL with Aurora Serverless v1.	October 26, 2021
Amazon Aurora supports Performance Insights in additional Amazon Web Services Regions	Performance Insights is available in the Middle East (Bahrain), Africa (Cape Town), Europe (Milan), and Asia Pacific (Osaka) Regions. For more information, see Amazon Web Services Region support for Performance Insights.	October 5, 2021
Configurable autoscaling timeout for Aurora Serverless v1	You can choose how long Aurora Serverless v1 waits to find an autoscaling point. If no autoscaling point is found during that period, Aurora Serverless v1 cancels the scaling event or forces the capacity change, depending on the timeout action that you selected. For more information, see Autoscaling for Aurora Serverless v1.	September 10, 2021

Aurora supports X2g and T4g instance classes	Both Aurora MySQL and Aurora PostgreSQL can now use X2g and T4g instance classes. The instance classes that you can use depend on the version of Aurora MySQL or Aurora PostgreSQL. For information about supported instance types, see DB instance classes.	September 10, 2021
Amazon RDS supports RDS Proxy in a shared VPC	You can now create an RDS Proxy in a shared virtual private cloud (VPC). For more information about RDS Proxy, see "Managing Connections with Amazon RDS Proxy" in the Amazon RDS User Guide or the Aurora User Guide.	August 6, 2021
Aurora version policy page	The *Amazon Aurora User Guide* now includes a section with general information about Aurora versions and associated policies. For details, see Amazon Aurora versions.	July 14, 2021
Exclude Data API events from an Amazon CloudTrail trail	You can exclude Data API events from a CloudTrail trail. For more information, see Excluding Data API events from an Amazon CloudTrail trail.	July 2, 2021

Amazon Aurora PostgreSQL-Compatible Edition supports additional extensions	Newly supported extensions include pg_bigm, pg_cron, pg_partman, and pg_proctab. For more information, see Extension versions for Amazon Aurora PostgreSQL-Compatible Edition.	June 17, 2021
Cloning for Aurora Serverless clusters	You can now create cloned clusters that are Aurora Serverless. For information about cloning, see Cloning a volume for an Aurora DB cluster.	June 16, 2021
Aurora global databases available in China (Beijing) and China (Ningxia) Regions	You can now create Aurora global databases in the China (Beijing) and China (Ningxia) Regions. For information about Aurora global databases, see Working with Amazon Aurora global databases.	May 19, 2021
FIPS 140-2 support for Data API	The Data API supports the Federal Information Processing Standard Publication 140-2 (FIPS 140-2) for SSL/TLS connections. For more information, see Data API availability.	May 14, 2021

Amazon JDBC Driver for PostgreSQL (preview)	The Amazon JDBC Driver for PostgreSQL, now available in preview, is a client driver designed for the high availability of Aurora PostgreSQL. For more information, see Connecting with the Amazon Web Services JDBC Driver for PostgreSQL (preview).	April 27, 2021
The Data API available in additional Amazon Web Services Regions	The Data API is now available in the Asia Pacific (Seoul) and Canada (Central) Regions. For more information, see Availability of the Data API.	April 9, 2021
Amazon Aurora supports the Graviton2 DB instance classes	You can now use the Graviton2 DB instance classes db.r6g.x to create DB clusters running MySQL or PostgreSQL. For more information, see DB instance class types.	March 12, 2021

RDS Proxy endpoint enhancements	You can create additional endpoints associated with each RDS proxy. Creating an endpoint in a different VPC enables cross-VPC access for the proxy. Proxies for Aurora MySQL clusters can also have read-only endpoints. These reader endpoints connect to reader DB instances in the clusters and can improve read scalability and availability for query-intensive applications. For more information about RDS Proxy, see "Managing Connections with Amazon RDS Proxy" in the Amazon RDS User Guide or the Aurora user guide.	March 8, 2021
Amazon Aurora is available in the Asia Pacific (Osaka) Region	Amazon Aurora is now available in the Asia Pacific (Osaka) Region. For more information, see Regions and Availability Zones.	March 1, 2021
Aurora PostgreSQL supports enabling both IAM and Kerberos authentication on the same DB cluster	Aurora PostgreSQL now supports enabling both IAM authentication and Kerberos authentication on the same DB cluster. For more information, see Database authentication with Amazon Aurora.	February 24, 2021

Aurora global database now supports managed planned failover	Aurora global database now supports managed planned failover, allowing you to m ore easily change the primary Amazon Region of your Aurora global database. You can use managed planned failover with healthy Aurora global databases only. To learn more, see Disaster recovery and Amazon Aurora global databases. For reference information, see `FailoverGlobalClus ter` in the *Amazon RDS API Reference*.	February 11, 2021
Data API for Aurora Serverles s now supports more data types	With the Data API for Aurora Serverless, you can now use `UUID` and `JSON` data types as input to your database. Also with the Data API for Aurora Serverless, you can now have a `LONG` type value returned from your database as a `STRING` value. To learn more, see Calling the Data API. For reference information about supported data types, see `SqlParameter` in the *Amazon RDS Data Service API Reference*.	February 2, 2021

Aurora PostgreSQL supports major version upgrades to PostgreSQL 12	With Aurora PostgreSQL, you can now upgrade the DB engine to major version 12. For more information, see Upgrading the PostgreSQL DB engine for Aurora PostgreSQL.	January 28, 2021
Aurora MySQL supports in-place upgrade	You can upgrade your Aurora MySQL 1.x cluster to Aurora MySQL 2.x, preserving the DB instances, endpoints, and so on of the original cluster. This in-place upgrade technique avoids the inconvenience of setting up a whole new cluster by restoring a snapshot. It also avoids the overhead of copying all your table data into a new cluster. For more information, see Upgrading the major version of an Aurora MySQL DB cluster from 1.x to 2.x.	January 11, 2021
Amazon JDBC Driver for MySQL (preview)	The Amazon JDBC Driver for MySQL, now available in preview, is a client driver designed for the high availability of Aurora MySQL. For more information, see Connecting with the Amazon Web Services JDBC Driver for MySQL (preview).	January 7, 2021

Aurora supports database activity streams on secondary clusters of a global database	You can start a database a database activity stream on a primary or secondary clu ster of Aurora PostgreSQ L or Aurora MySQL. For supported engine versions, see Limitations of Aurora global databases.	December 22, 2020
Multi-master clusters with 4 DB instances	The maximum number of DB instances in an Aurora MySQL multi-master cluster is now four. Formerly, the maximum was two DB instances. For more information, see Working with Aurora Multi-Master Clusters.	December 17, 2020
Aurora PostgreSQL supports Amazon Lambda functions	You can now invoke Amazon Lambda function for your Aurora PostgreSQL DB clusters. For more informati on, see Invoking a Lambda function from an Aurora PostgreSQL DB cluster.	December 11, 2020
Amazon Aurora supports the Graviton2 DB instance classes in preview	You can now use the Graviton2 DB instance classes db.r6g.x in preview to create DB clusters running MySQL or PostgreSQL. For more information, see DB instance class types.	December 11, 2020

Amazon Aurora serverless is now available in preview.	Amazon Aurora serverless is available in preview. To work with Amazon Aurora serverless, apply for access. For more information, see the Aurora serverless page.	December 1, 2020

Aurora PostgreSQL is now available for Aurora Serverless in more Amazon Web Services Regions.	Aurora PostgreSQL is now available for Aurora Serverless in more Amazon Web Services Regions. You can now choose to run Aurora PostgreSQL Serverless v1 in the same Amazon Web Services Regions that offer Aurora MySQL Serverless v1. Additional Amazon Web Services Regions with Aurora Serverless support include US West (N. California), Asia Pacific (Singapore) Asia Pacific (Sydney) Asia Pacific (Seoul) Asia Pacific (Mumbai) Canada (Central) Europe (London) and Europe (Paris). For a list of all Regions and supported Aurora DB engines for Aurora Serverless, see Supported Regions and Aurora DB engines for Aurora Serverless v1. Amazon RDS Data API for Aurora Serverless is also now available in these same Amazon Web Services Regions. For a list of all Regions with support for the Data API for Aurora Serverless, see Data API with Aurora MySQL Serverless v1	November 24, 2020

Amazon RDS Performance Insights introduces new dimensions	You can group database load according to the dimension groups for database, application (PostgreSQL), and session type (PostgreSQL). Amazon RDS also supports the dimensions db.name, db.application.name (PostgreSQL), and db.session_type.name (PostgreSQL). For more information, see Top load table.	November 24, 2020
Aurora Serverless supports Aurora PostgreSQL version 10.12	Aurora PostgreSQL for Aurora Serverless has been upgraded to Aurora PostgreSQL version 10.12 throughout the Amazon Regions where Aurora PostgreSQL for Aurora Serverless is supported. For more information, see Supported Regions and Aurora DB engines for Aurora Serverless v1.	November 4, 2020
The Data API now supports tag-based authorization	The Data API supports tag-based authorization. If you've labeled your RDS cluster resources with tags, you can use these tags in your policy statements to control access through the Data API. For more information, see Authorizing access to the Data API.	October 27, 2020

Amazon Aurora extends support for exporting snapshots to Amazon S3	You can now export DB snapshot data to Amazon S3 in all commercial Amazon Web Services Regions. For more information, see Exporting DB snapshot data to Amazon S3.	October 22, 2020
Aurora global database supports cloning	You can now create clones of the primary and secondary DB clusters of your Aurora global databases. You can do so by using the Amazon Web Services Management Console and choosing the **Create clone** menu option. You can also use the Amazon CLI and run the `restore-db-cluster-to-point-in-time` command with the `--restore-type copy-on-write` option. Using the Amazon Web Services Management Console or the Amazon CLI, you can also clone DB clusters from your Aurora global databases across Amazon accounts. For more information about cloning, see Cloning an Aurora DB cluster volume.	October 19, 2020

Amazon Aurora supports dynamic resizing for the cluster volume	Starting with Aurora MySQL 1.23 and 2.09, and Aurora PostgreSQL 3.3.0 and Aurora PostgreSQL 2.6.0, Aurora reduces the size of the cluster volume after you remove data through operations such as DROP TABLE. To take advantage of this enhancement, upgrade to one of the appropriate versions depending on the database engine that your cluster uses. For information about this feature and how to check used and available storage space for an Aurora cluster, see Managing Performance and Scaling for Aurora DB Clusters.	October 13, 2020
Amazon Aurora supports volume sizes up to 128 TiB	New and existing Aurora cluster volumes can now grow to a maximum size of 128 tebibytes (TiB). For more information, see How Aurora storage grows.	September 22, 2020
Aurora PostgreSQL supports the db.r5 and db.t3 DB instance classes in the China (Ningxia) Region	You can now create Aurora PostgreSQL DB clusters in the China (Ningxia) Region that use the db.r5 and db.t3 DB instance classes. For more information, see DB instance classes.	September 3, 2020

Aurora parallel query enhancements	Starting with Aurora MySQL 2.09 and 1.23, you can take advantage of enhancements to the parallel query feature. Creating a parallel query cluster no longer requires a special engine mode. You can now turn parallel query on and off using the `aurora_parallel_query` configuration option for any provisioned cluster that's running a compatible Aurora MySQL version. You can upgrade an existing cluster to a compatible Aurora MySQL version and use parallel query, instead of creating a new cluster and importing data into it. You can use Performance Insights for parallel query clusters. You can stop and start parallel query clusters. You can create Aurora parallel query clusters that are compatible with MySQL 5.7. Parallel query works for tables that use the `DYNAMIC` row format. Parallel query clusters can use Amazon Identity and Access Management (IAM) authentication. Reader DB instances in parallel query clusters can take advantage of the `READ COMMITTED`	September 2, 2020

	isolation level. You can also now create parallel query clusters in additional Amazon Web Services Regions. For more information about the parallel query feature and these enhancements, see Parallel query for Aurora MySQL.	
Changes to Aurora MySQL parameter binlog_rows_query_log_events	You can now change the value of the Aurora MySQL configuration parameter `binlog_rows_query_log_events` . Formerly, this parameter wasn't modifiable.	August 26, 2020

Support for automatic minor version upgrades for Aurora MySQL	With Aurora MySQL, the setting **Enable auto minor version upgrade** now takes effect when you specify it for an Aurora MySQL DB cluster. When you enable auto minor version upgrade, Aurora automatically upgrades to new minor versions as they are released. The automatic upgrades occur during the maintenance window for the database. For Aurora MySQL, this feature applies only to Aurora MySQL version 2, which is compatible with MySQL 5.7. Initially, the automatic upgrade procedure brings Aurora MySQL DB clusters to version 2.07.2. For more information about how this feature works with Aurora MySQL, see Database Upgrades and Patches for Amazon Aurora MySQL.	August 3, 2020
Aurora PostgreSQL supports major version upgrades to PostgreSQL version 11	With Aurora PostgreSQL, you can now upgrade the DB engine to major version 11. For more information, see Upgrading the PostgreSQL DB engine for Aurora PostgreSQL.	July 28, 2020

Amazon Aurora supports Amazon PrivateLink	Amazon Aurora now supports creating Amazon VPC endpoints for Amazon RDS API calls to keep traffic between applications and Aurora in the Amazon network. For more information, see Amazon Aurora and interface VPC endpoints (Amazon PrivateLink).	July 9, 2020
RDS Proxy generally available	RDS Proxy is now generally available. You can use RDS Proxy with RDS for MySQL, Aurora MySQL, RDS for PostgreSQL, and Aurora PostgreSQL for production workloads. For more information about RDS Proxy, see "Managing Connections with Amazon RDS Proxy" in the Amazon RDS User Guide or the Aurora user guide.	June 30, 2020
Automatic plan capture for Aurora PostgreSQL	Performance Insights collects execution plans automatically. You can use these plans to diagnose SQL performance problems. For more information, see Accessing Execution Plans.	June 29, 2020

Aurora global database write forwarding	You can now enable write capability on secondary clusters in a global database. With write forwarding, you issue DML statements on a secondary cluster, Aurora forwards the write to the primary cluster, and the updated data is replicated to all the secondary clusters. For more information, see Write forwarding for secondary Amazon Web Services Regions with an Aurora global database.	June 18, 2020
Aurora supports integration with Amazon Backup	You can use Amazon Backup to manage backups of Aurora DB clusters. For more information, see Overview of backing up and restoring an Aurora DB cluster.	June 10, 2020
Aurora PostgreSQL supports db.t3.large DB instance classes	You can now create Aurora PostgreSQL DB clusters that use the db.t3.large DB instance classes. For more information, see DB instance classes.	June 5, 2020

Aurora global database supports PostgreSQL version 11.7 and managed recovery point objective (RPO)	You can now create Aurora global databases for the PostgreSQL database engine version 11.7. You can also manage how a PostgreSQL global database recovers from a failure using a recovery point objective (RPO). For more information, see Cross-Region Disaster Recovery for Aurora global databases.	June 4, 2020
Aurora MySQL supports database monitoring with database activity streams	Aurora MySQL now includes database activity streams, which provide a near-real-time data stream of the database activity in your relational database. For more information, see Using database activity streams.	June 2, 2020
The query editor available in additional Amazon Web Services Regions	The query editor for Aurora Serverless is now available in additional Amazon Web Services Regions. For more information, see Availability of the query editor.	May 28, 2020
The Data API available in additional Amazon Web Services Regions	The Data API is now available in additional Amazon Web Services Regions. For more information, see Availability of the Data API.	May 28, 2020

RDS Proxy available in Canada (Central) Region	You can now use the RDS Proxy preview in the Canada (Central) Region. For more information about RDS Proxy, see Managing connections with Amazon RDS proxy (preview).	May 28, 2020
Aurora global database and cross-Region read replicas	For an Aurora global database, you can now create an Aurora MySQL cross-Region read replica from the primary cluster in the same region as a secondary cluster. For more information about Aurora Global Database and cross-Region read replicas, see Working with Amazon Aurora global database and Replicating Amazon Aurora MySQL DB.	May 18, 2020
RDS Proxy available in more Amazon Web Services Regions	You can now use the RDS Proxy preview in the US West (N. California) Region, the Europe (London) Region, the Europe (Frankfurt) Region, the Asia Pacific (Seoul) Region, the Asia Pacific (Mumbai) Region, the Asia Pacific (Singapore) Region, and the Asia Pacific (Sydney) Region. For more information about RDS Proxy, see Managing connections with Amazon RDS proxy (preview).	May 13, 2020

Aurora PostgreSQL-Compatible Edition supports on-premises or self-hosted Microsoft active directory	You can now use an on-premises or self-hosted Active Directory for Kerberos authentication of users when they connect to your Aurora PostgreSQL DB clusters. For more information, see Using Kerberos authentication with Aurora PostgreSQL.	May 7, 2020
Aurora MySQL multi-master clusters available in more Amazon Web Services Regions	You can now create Aurora multi-master clusters in the Asia Pacific (Seoul) Region, the Asia Pacific (Tokyo) Region, the Asia Pacific (Mumbai) Region, and the Europe (Frankfurt) Region. For more information about multi-master clusters, see Working with Aurora multi-master clusters.	May 7, 2020
Performance Insights supports analyzing statistics of running Aurora MySQL queries	You can now analyze statistics of running queries with Performance Insights for Aurora MySQL DB instances. For more information, see Analyzing statistics of running queries.	May 5, 2020

Java client library for Data API generally available	The Java client library for the Data API is now generally available. You can download and use a Java client library for Data API. It enables you to map your client-side classes to requests and responses of the Data API. For more information, see Using the Java client library for Data API.	April 30, 2020
Amazon Aurora is available in the Europe (Milan) Region	Amazon Aurora is now available in the Europe (Milan) Region. For more information, see Regions and Availability Zones.	April 28, 2020
Amazon Aurora is available in the Europe (Milan) Region	Amazon Aurora is now available in the Europe (Milan) Region. For more information, see Regions and Availability Zones.	April 27, 2020
Amazon Aurora is available in the Africa (Cape Town) Region	Amazon Aurora is now available in the Africa (Cape Town) Region. For more information, see Regions and Availability Zones.	April 22, 2020

Aurora PostgreSQL now supports db.r5.16xlarge and db.r5.8xlarge DB instance classes	You can now create Aurora PostgreSQL DB clusters running PostgreSQL that use the db.r5.16xlarge and db.r5.8xlarge DB instance classes. For more informati on, see Hardware specifica tions for DB instance classes for Aurora.	April 8, 2020
Amazon RDS proxy for PostgreSQL	Amazon RDS Proxy is now available for PostgreSQL. You can use RDS Proxy to reduce the overhead of connection management on your cluster and also the chance of "too many connections" errors. The RDS Proxy is currently in public preview for PostgreSQ L. For more information, see Managing connections with Amazon RDS proxy (preview).	April 8, 2020
Aurora global databases now support Aurora PostgreSQL	You can now create Aurora global databases for the PostgreSQL database engine. An Aurora global database spans multiple Amazon Web Services Regions, enabling low latency global reads and disaster recovery from region-wide outages. For more information, see Working with Amazon Aurora global database.	March 10, 2020

Support for major version upgrades for Aurora PostgreSQL	With Aurora PostgreSQL, you can now upgrade the DB engine to a major version. By doing so, you can skip ahead to a newer major version when you upgrade select PostgreSQL engine versions. For more information, see Upgrading the PostgreSQL DB engine for Aurora PostgreSQL.	March 4, 2020
Aurora PostgreSQL supports Kerberos authentication	You can now use Kerberos authentication to authenticate users when they connect to your Aurora PostgreSQL DB clusters. For more information, see Using Kerberos authentication with Aurora PostgreSQL.	February 28, 2020
The Data API supports Amazon PrivateLink	The Data API now supports creating Amazon VPC endpoints for Data API calls to keep traffic between applications and the Data API in the Amazon network. For more information, see Creating an Amazon VPC endpoint (Amazon PrivateLink) for the Data API.	February 6, 2020

Aurora machine learning support in Aurora PostgreSQL	The aws_ml Aurora PostgreSQL extension provides functions you use in your database queries to call Amazon Comprehend for sentiment analysis and SageMaker AI to run your own machine learning models. For more information, see Using machine learning (ML) capabilities with Aurora.	February 5, 2020
Aurora PostgreSQL supports exporting data to Amazon S3	You can query data from an Aurora PostgreSQL DB cluster and export it directly into files stored in an Amazon S3 bucket. For more information, see Exporting data from an Aurora PostgreSQL DB cluster to Amazon S3.	February 5, 2020
Support for exporting DB snapshot data to Amazon S3	Amazon Aurora supports exporting DB snapshot data to Amazon S3 for MySQL and PostgreSQL. For more information, see Exporting DB snapshot data to Amazon S3.	January 9, 2020

Aurora MySQL release notes in document history	This section now includes history entries for Aurora MySQL-Compatible Edition release notes for versions released after August 31, 2018. For the full release notes for a specific version, choose the link in the first column of the history entry.	December 13, 2019
Amazon RDS proxy	You can reduce the overhead of connection management on your cluster, and reduce the chance of "too many connections" errors, by using the Amazon RDS Proxy. You associate each proxy with an RDS DB instance or Aurora DB cluster. Then you use the proxy endpoint in the connection string for your application. The Amazon RDS Proxy is currently in a public preview state. It supports the Aurora MySQL database engine. For more informati on, see Managing connectio ns with Amazon RDS proxy (preview).	December 3, 2019

Data API for Aurora Serverless v1 supports data type mapping hints	You can now use a hint to instruct the Data API for Aurora Serverless v1 to send a `String` value to the database as a different type. For more information, see Calling the data API.	November 26, 2019
Data API for Aurora Serverless v1 supports a Java client library (preview)	You can download and use a Java client library for Data API. It enables you to map your client-side classes to requests and responses of the Data API. For more information, see Using the Java client library for Data API.	November 26, 2019
Aurora PostgreSQL is FedRAMP HIGH eligible	Aurora PostgreSQL is FedRAMP HIGH eligible. For details about Amazon and compliance efforts, see Amazon services in scope by compliance program.	November 26, 2019

READ COMMITTED isolation level enabled for Amazon Aurora MySQL replicas	You can now enable the `READ COMMITTED` isolation level on Aurora MySQL Replicas. Doing so requires enabling the `aurora_read_replica_read_committed_isolation_enabled` configuration setting at the session level. Using the `READ COMMITTED` isolation level for long-running queries on OLTP clusters can help address issues with history list length. Before enabling this setting, be sure to understand how the isolation behavior on Aurora Replicas differs from the usual MySQL implementation of `READ COMMITTED`. For more information, see Aurora MySQL isolation levels.	November 25, 2019
Performance Insights supports analyzing statistics of running Aurora PostgreSQL queries	You can now analyze statistics of running queries with Performance Insights for Aurora PostgreSQL DB instances. For more information, see Analyzing statistics of running queries.	November 25, 2019

More clusters in an Aurora global database	You can now add multiple secondary regions to an Aurora global database. You can take advantage of low latency global reads and disaster recovery across a wider geographic area. For more information about Aurora global databases, see Working with Amazon Aurora global databases.	November 25, 2019
Aurora machine learning support in Aurora MySQL	In Aurora MySQL 2.07 and higher, you can call Amazon Comprehend for sentiment analysis and SageMaker AI for a wide variety of machine learning algorithms. You use the results directly in your database application by embedding calls to stored functions in your queries. For more information, see Using machine learning (ML) capabilities with Aurora.	November 25, 2019

Aurora global database no longer requires engine mode setting	You no longer need to specify `--engine-mode=global` when creating a cluster that is intended to be part of an Aurora global database. All Aurora clusters that meet the compatibility requirements are eligible to be part of a gl obal database. For example, the cluster currently must use Aurora MySQL version 1 with MySQL 5.6 compatibility. For information about Aurora global databases, see Working with Amazon Aurora global databases.	November 25, 2019
Aurora global database is available for Aurora MySQL version 2	Starting in Aurora MySQL 2.07, you can create an Aurora global database with MySQL 5.7 compatibility. You don't need to specify the `global` engine mode for the primary or secondary clusters. You can add any new provisioned cluster with Aurora MySQL 2.07 or higher to an Aurora Global Database. For information about Aurora Global Database, see Working with Amazon Aurora global database.	November 25, 2019

Aurora MySQL hot row contention optimization available without lab mode	The hot row contention optimization is now generally available for Aurora MySQL and does not require the Aurora lab mode setting to be ON. This feature substantially improves throughput for workloads with many transactions contending for rows on the same page. The improvement involves changing the lock release algorithm used by Aurora MySQL.	November 19, 2019
Aurora MySQL hash joins available without lab mode	The hash join feature is now generally available for Aurora MySQL and does not require the Aurora lab mode setting to be ON. This feature can improve query performance when you need to join a large amount of data by using an equijoin. For more information about using this feature, see Working with hash joins in Aurora MySQL.	November 19, 2019
Aurora MySQL 2.* support for more db.r5 instance classes	Aurora MySQL clusters now support the instance types db.r5.8xlarge, db.r5.16xlarge, and db.r5.24xlarge. For more information about instance types for Aurora MySQL clusters, see Choosing the DB instance class.	November 19, 2019

Aurora MySQL 2.* support for backtracking	Aurora MySQL 2.* versions now offer a quick way to recover from user errors, such as dropping the wrong table or deleting the wrong row. Backtrack allows you to move your database to a prior point in time without needing to restore from a backup, and it completes within seconds, even for large databases. For details, see Backtracking an Aurora DB cluster.	November 19, 2019
Billing tag support for Aurora	You can now use tags to keep track of cost allocation for resources such as Aurora clusters, DB instances within Aurora clusters, I/O, backups, snapshots, and so on. You can see costs associated with each tag using Amazon Cost Explorer. For more informati on about using tags with Aurora, see Tagging Amazon RDS resources. For general information about tags and ways to use them for cost analysis, see Using cost allocation tags and User-defi ned cost allocation tags.	October 23, 2019

Data API for Aurora PostgreSQL	Aurora PostgreSQL now supports using the Data API with Amazon Aurora Serverless v1 DB clusters. For more information, see Using the Data API for Aurora Serverless v1.	September 23, 2019
Aurora PostgreSQL supports uploading database logs to CloudWatch Logs	You can configure your Aurora PostgreSQL DB cluster to publish log data to a log group in Amazon CloudWatch Logs. With CloudWatch Logs, you can perform real-time analysis of the log data, and use CloudWatch to create alarms and view metrics. You can use CloudWatch Logs to store your log records in highly durable storage. For more information, see Publishing Aurora PostgreSQL logs to Amazon CloudWatch Logs.	August 9, 2019
Multi-master clusters for Aurora MySQL	You can set up Aurora MySQL multi-master clusters. In these clusters, each DB instance has read/write capability. For more information, see Working with Aurora multi-master clusters.	August 8, 2019

Aurora PostgreSQL supports Aurora Serverless v1	You can now use Amazon Aurora Serverless v1 with Aurora PostgreSQL. An Aurora Serverless DB cluster automatically starts up, shuts down, and scales up or down its compute capacity based on your application's needs. For more information, see Using Amazon Aurora Serverless v1.	July 9, 2019
Cross-account cloning for Aurora MySQL	You can now clone the cluster volume for an Aurora MySQL DB cluster between Amazon accounts. You authorize the sharing through Amazon Resource Access Manager (Amazon RAM). The cloned cluster volume uses a copy-on-write mechanism, which only requires additional storage for new or changed data. For more information about cloning for Aurora, see Cloning databases in an Aurora DB cluster.	July 2, 2019
Aurora PostgreSQL supports db.t3 DB instance classes	You can now create Aurora PostgreSQL DB clusters that use the db.t3 DB instance classes. For more information, see DB instance class.	June 20, 2019

Support for importing data from Amazon S3 for Aurora PostgreSQL	You can now import data from an Amazon S3 file into a table in an Aurora PostgreSQL DB cluster. For more informati on, see Importing Amazon S3 data into an Aurora PostgreSQL DB cluster.	June 19, 2019
Aurora PostgreSQL now provides fast failover recovery with cluster cache management	Aurora PostgreSQL now provides cluster cache management to ensure fast recovery of the primary DB instance in the event of a failover. For more informati on, see Fast recovery after failover with cluster cache management.	June 11, 2019
Data API for Aurora Serverless v1 generally available	You can access Aurora Serverless v1 clusters with web services-based applicati ons using the Data API. For more information, see Using the Data API for Aurora Serv erless v1.	May 30, 2019
Aurora PostgreSQL supports database monitoring with database activity streams	Aurora PostgreSQL now includes database activity streams, which provide a near-real-time data stream of the database activity in your relational database. For more information, see Using database activity streams.	May 30, 2019

Amazon Aurora recommendations	Amazon Aurora now provides automated recommendations for Aurora resources. For more information, see Using Amazon Aurora recommendations.	May 22, 2019
Performance Insights support for Aurora global database	You can now use Performance Insights with Aurora Global Database. For information about Performance Insights for Aurora, see Using Amazon RDS performance insights. For information about Aurora global databases, see Working with Aurora global database.	May 13, 2019
Performance Insights is available for Aurora MySQL 5.7	Amazon RDS Performance Insights is now available for Aurora MySQL 2.x versions, which are compatible with MySQL 5.7. For more information, see Using Amazon RDS performance insights.	May 3, 2019
Aurora global databases available in more Amazon Web Services Regions	You can now create Aurora global databases in most Amazon Web Services Regions where Aurora is available. For information about Aurora global databases, see Working with Amazon Aurora global databases.	April 30, 2019

Minimum capacity of 1 for Aurora Serverless v1	The minimum capacity setting you can use for an Aurora Serverless v1 cluster is 1. Formerly, the minimum was 2. For information about specifying Aurora Serverless capacity values, see Setting the capacity of an Aurora Serverless v1 DB cluster.	April 29, 2019
Aurora Serverless v1 timeout action	You can now specify the action to take when an Aurora Serverless v1 capacity change times out. For more information, see Timeout action for capacity changes.	April 29, 2019
Per-second billing	Amazon RDS is now billed in 1-second increments in all Amazon Web Services Regions except Amazon GovCloud (US) for on-demand instances. For more information, see DB instance billing for Aurora.	April 25, 2019
Sharing Aurora Serverless v1 snapshots across Amazon Web Services Regions	With Aurora Serverless v1, snapshots are always encrypted. If you encrypt the snapshot with your own Amazon KMS key, you can now copy or share the snapshot across Amazon Web Services Regions. For information about snapshots of Aurora Serverless v1 DB clusters, see Aurora Serverless v1 and snapshots.	April 17, 2019

Restore MySQL 5.7 backups from Amazon S3	You can now create a backup of your MySQL version 5.7 database, store it on Amazon S3, and then restore the backup file onto a new Aurora MySQL DB cluster. For more information, see Migrating data from an external MySQL database to an Aurora MySQL DB cluster.	April 17, 2019
Sharing Aurora Serverless v1 snapshots across regions	With Aurora Serverless v1, snapshots are always encrypted. If you encrypt the snapshot with your own Amazon KMS key, you can now copy or share the snapshot across regions. For information about snapshots of Aurora Serverless v1 DB clusters, see Aurora Serverless and snapshots.	April 16, 2019
Aurora proof-of-concept tutorial	You can learn how to perform a proof of concept to try your application and workload with Aurora. For the full tutorial, see Performing an Aurora proof of concept.	April 16, 2019
Aurora Serverless v1 supports restoring from an Amazon S3 backup	You can now import backups from Amazon S3 to an Aurora Serverless cluster. For details about that procedure, see Migrating data from MySQL by using an Amazon S3 bucket.	April 16, 2019

New modifiable parameters for Aurora Serverless v1	You can now modify the following DB parameters for an Aurora Serverless v1 cluster: `innodb_file_format`, `innodb_file_per_table`, `innodb_large_prefix`, `innodb_lock_wait_timeout`, `innodb_monitor_disable`, `innodb_monitor_enable`, `innodb_monitor_reset`, `innodb_monitor_reset_all`, `innodb_print_all_deadlocks`, `log_warnings`, `net_read_timeout`, `net_retry_count`, `net_write_timeout`, `sql_mode`, and `tx_isolation`. For more information about configuration parameters for Aurora Serverless v1 clusters, see Aurora Serverless v1 and parameter groups.	April 4, 2019
Aurora PostgreSQL supports db.r5 DB instance classes	You can now create Aurora PostgreSQL DB clusters that use the db.r5 DB instance classes. For more information, see DB instance class.	April 4, 2019

Aurora PostgreSQL logical replication	You can now use PostgreSQL logical replication to replicate parts of a database for an Aurora PostgreSQL DB cluster. For more information, see Using PostgreSQL logical replication.	March 28, 2019
GTID support for Aurora MySQL 2.04	You can now use replicati on with the global transacti on ID (GTID) feature of MySQL 5.7. This feature simplifies performing binary log (binlog) replication b etween Aurora MySQL and an external MySQL 5.7-compa tible database. The replicati on can use the Aurora MySQL cluster as the source or the destination. This feature is available for Aurora MySQL 2.04 and higher. For more information about GTID-based replication and Aurora MySQL, see Using GTID-based replication for Aurora MySQL.	March 25, 2019

Uploading Aurora Serverless v1 logs to Amazon CloudWatch	You can now have Aurora upload database logs to CloudWatch for an Aurora Serverless v1 cluster. For more information, see Viewing Aurora Serverless DB clusters. As part of this enhancement, you can now define values for instance-level parameters in a DB cluster parameter group, and those values apply to all DB instances in the cluster unless you override them in the DB parameter group. For more information, see Working with DB parameter groups and DB cluster parameter groups.	February 25, 2019
Aurora MySQL supports db.t3 DB instance classes	You can now create Aurora MySQL DB clusters that use the db.t3 DB instance classes. For more information, see DB instance class.	February 25, 2019
Aurora MySQL supports db.r5 DB instance classes	You can now create Aurora MySQL DB clusters that use the db.r5 DB instance classes. For more information, see DB instance class.	February 25, 2019

Performance Insights counters for Aurora MySQL	You can now add performance counters to your Performance Insights charts for Aurora MySQL DB instances. For more information, see Performance Insights dashboard components.	February 19, 2019
Amazon RDS Performance Insights supports viewing more SQL text for Aurora MySQL	Amazon RDS Performance Insights now supports viewing more SQL text in the Performance Insights dashboard for Aurora MySQL DB instances. For more information, see Viewing more SQL text in the Performance Insights dashboard.	February 6, 2019
Amazon RDS Performance Insights supports viewing more SQL text for Aurora PostgreSQL	Amazon RDS Performance Insights now supports viewing more SQL text in the Performance Insights dashboard for Aurora PostgreSQL DB instances. For more information, see Viewing more SQL text in the Performance Insights dashboard.	January 24, 2019

Aurora backup billing	You can use the Amazon CloudWatch metrics `TotalBackupStorageBilled` , `SnapshotStorageUsed` , and `BackupRetentionPeriodStorageUsed` to monitor the space usage of your Aurora backups. For more information about how to use CloudWatch metrics, see Overview of monitoring. For more information about how to manage storage for backup data, see Understanding Aurora backup storage usage.	January 3, 2019
Performance Insights counters	You can now add performance counters to your Performance Insights charts. For more information, see Performance Insights dashboard components.	December 6, 2018
Aurora global database	You can now create Aurora global databases. An Aurora global database spans multiple Amazon Web Services Regions, enabling low latency global reads and disaster recovery from region-wide outages. For more information, see Working with Amazon Aurora global database.	November 28, 2018

Query plan management in Aurora PostgreSQL	Aurora PostgreSQL now provides query plan management that you can use to manage PostgreSQL query execution plans. For more information, see Managing query execution plans for Aurora PostgreSQL.	November 20, 2018
Query editor for Aurora Serverless v1 (beta)	You can run SQL statements in the Amazon RDS console on Aurora Serverless v1 clusters. For more information, see Using the query editor for Aurora Serverless v1.	November 20, 2018
Data API for Aurora Serverless v1 (beta)	You can access Aurora Serverless v1 clusters with web services-based applications using the Data API. For more information, see Using the Data API for Aurora Serverless.	November 20, 2018
TLS support for Aurora Serverless v1	Aurora Serverless v1 clusters support TLS/SSL encryption. For more information, see TLS/SSL for Aurora Serverless.	November 19, 2018

Custom endpoints	You can now create endpoints that are associated with an arbitrary set of DB instances. This feature helps with load balancing and high availabil ity for Aurora clusters where some DB instances have different capacity or configura tion than others. You can use custom endpoints instead of connecting to a specific DB i nstance through its instance endpoint. For more informati on, see Amazon Aurora endpoints.	November 12, 2018
IAM authentication support in Aurora PostgreSQL	Aurora PostgreSQL now supports IAM authentication. For more information see IAM database authentication.	November 8, 2018
Custom parameter groups for restore and point in time recovery	You can now specify a custom parameter group when you restore a snapshot or perform a point in time recovery operation. For more informati on, see Restoring from a DB cluster snapshot and Restoring a DB cluster to a specified time.	October 15, 2018
Deletion protection for Aurora DB clusters	When you enable deletion protection for a DB cluster, the database cannot be d eleted by any user. For more information, see Deleting a DB cluster.	September 26, 2018

Stop/Start feature Aurora	You can now stop or start an entire Aurora cluster with a single operation. For more information, see Stopping and starting an Aurora cluster.	September 24, 2018
Parallel query feature for Aurora MySQL	Aurora MySQL now offers an option to parallelize I/O work for queries across the Aurora storage infrastructure. This feature speeds up data-inte nsive analytic queries, which are often the most time-consuming operations in a workload. For more informati on, see Parallel query for Aurora MySQL.	September 20, 2018
New guide	This is the first release of the *Amazon Aurora User Guide.*	August 31, 2018

Amazon Glossary

For the latest Amazon terminology, see the Amazon glossary in the *Amazon Web Services Glossary Reference*.