

# Amazon EC2



# Amazon EC2: Instance Types

# Table of Contents

<b>Instance types</b> .....	<b>1</b>
Current generation instances .....	1
Previous generation instances .....	2
Instance performance .....	2
<b>Naming conventions</b> .....	<b>4</b>
<b>Specifications</b> .....	<b>6</b>
General purpose .....	7
Available sizes .....	8
Platform summary .....	10
Performance specifications .....	13
Network specifications .....	34
Amazon EBS specifications .....	49
Instance store specifications .....	67
Security specifications .....	73
Compute optimized .....	95
Available sizes .....	96
Platform summary .....	98
Performance specifications .....	99
Network specifications .....	117
Amazon EBS specifications .....	127
Instance store specifications .....	140
Security specifications .....	144
Memory optimized .....	161
Available sizes .....	162
Platform summary .....	165
Performance specifications .....	168
Network specifications .....	193
Amazon EBS specifications .....	209
Instance store specifications .....	228
Security specifications .....	238
Storage optimized .....	261
Available sizes .....	262
Platform summary .....	263
Performance specifications .....	264

---

Network specifications .....	270
Amazon EBS specifications .....	275
Instance store specifications .....	280
Security specifications .....	286
Accelerated computing .....	290
Available sizes .....	290
Platform summary .....	292
Performance specifications .....	294
Network specifications .....	302
Amazon EBS specifications .....	308
Instance store specifications .....	314
Security specifications .....	318
High-performance computing .....	325
Available sizes .....	326
Platform summary .....	326
Performance specifications .....	327
Network specifications .....	328
Amazon EBS specifications .....	329
Instance store specifications .....	331
Security specifications .....	331
Previous generation .....	332
Available sizes .....	333
Platform summary .....	334
Performance specifications .....	335
Network specifications .....	341
Amazon EBS specifications .....	345
Instance store specifications .....	348
Security specifications .....	350
<b>Amazon Nitro System .....</b>	<b>356</b>
Nitro components .....	356
Virtualized instances .....	356
Bare metal instances .....	357
Requirements .....	358
<b>Quotas .....</b>	<b>359</b>
On-Demand Instance quotas .....	359
Spot Instance quotas .....	360

---

Dedicated Host quotas .....	360
<b>Document history .....</b>	<b>367</b>

# Amazon EC2 instance types

When you launch an EC2 instance, the *instance type* that you specify determines the hardware of the host computer used for your instance. Each instance type offers different compute, memory, and storage capabilities, and is grouped in an instance family based on these capabilities. Select an instance type based on the requirements of the application or software that you plan to run on your instance.

Amazon EC2 dedicates some resources of the host computer, such as CPU, memory, and instance storage, to a particular instance. Amazon EC2 shares other resources of the host computer, such as the network and the disk subsystem, among instances. If each instance on a host computer tries to use as much of one of these shared resources as possible, each receives an equal share of that resource. However, when a resource is underused, an instance can consume a higher share of that resource while it's available.

Each instance type provides higher or lower minimum performance from a shared resource. For example, instance types with high I/O performance have a larger allocation of shared resources. Allocating a larger share of shared resources also reduces the variance of I/O performance. For most applications, moderate I/O performance is more than enough. However, for applications that require greater or more consistent I/O performance, consider an instance type with higher I/O performance.

## Contents

- [Current generation instances](#)
- [Previous generation instances](#)
- [Amazon EC2 instance type naming conventions](#)
- [Amazon EC2 instance type specifications](#)
- [Instances built on the Amazon Nitro System](#)
- [Amazon EC2 instance type quotas](#)

## Current generation instances

For the best performance, we recommend that you use the following instance types when you launch new instances. For more information, see [Amazon EC2 Instance Types](#).

- **General purpose:** M5 | M5a | M5ad | M5d | M5dn | M5n | M5zn | M6a | M6g | M6gd | M6i | M6id | M6idn | M6in | M7a | M7g | M7gd | M7i | M7i-flex | Mac1 | Mac2 | Mac2-m2 | Mac2-m2pro | T2 | T3 | T3a | T4g
- **Compute optimized:** C5 | C5a | C5ad | C5d | C5n | C6a | C6g | C6gd | C6gn | C6i | C6id | C6in | C7a | C7g | C7gd | C7gn | C7i
- **Memory optimized:** R5 | R5a | R5ad | R5b | R5d | R5dn | R5n | R6a | R6g | R6gd | R6i | R6idn | R6in | R6id | R7a | R7g | R7gd | R7i | R7iz | U-3tb1 | U-6tb1 | U-9tb1 | U-12tb1 | U-18tb1 | U-24tb1 | X1 | X2gd | X2idn | X2iedn | X2iezn | X1e | z1d
- **Storage optimized:** D2 | D3 | D3en | H1 | I3 | I3en | I4g | I4i | Im4gn | Is4gen
- **Accelerated computing:** DL1 | DL2q | F1 | G4ad | G4dn | G5 | G5g | G6 | Gr6 | Inf1 | Inf2 | P2 | P3 | P3dn | P4d | P4de | P5 | Trn1 | Trn1n | VT1
- **High-performance computing:** Hpc6a | Hpc6id | Hpc7a | Hpc7g

## Previous generation instances

Amazon Web Services offers previous generation instance types for users who have optimized their applications around them and have yet to upgrade. We encourage you to use current generation instance types to get the best performance, but we continue to support the following previous generation instance types.

- **General purpose:** A1 | M1 | M2 | M3 | M4 | T1
- **Compute optimized:** C1 | C3 | C4
- **Memory optimized:** R3 | R4
- **Storage optimized:** I2
- **Accelerated computing:** G3

## Instance performance

### Fixed performance instances

Fixed performance instances provide fixed CPU resources. These instances can deliver and sustain full CPU performance at any time, and for as long as a workload needs it.

If you need consistently high CPU performance for applications such as video encoding, high volume websites, or HPC applications, we recommend that you use fixed performance instances.

## Burstable performance instances

Burstable performance (T) instances provide a baseline level of CPU performance with the ability to burst above the baseline. The baseline CPU is designed to meet the needs of the majority of general purpose workloads, such as large-scale micro-services, web servers, small and medium databases, data logging, code repositories, virtual desktops, and development and test environments.

The baseline utilization and ability to burst are governed by CPU credits. Each burstable performance instance continuously earns credits when it stays below the CPU baseline, and continuously spends credits when it bursts above the baseline.

For more information, see [Burstable performance instances](#) in the *Amazon EC2 User Guide for Linux Instances*.

## Flex instances

M7i-flex instances offer a balance of compute, memory, and network resources, and they provide the most cost-effective way to run a broad spectrum of general purpose applications. M7i-flex instances provide reliable CPU resources to deliver a baseline CPU performance of 40 percent, which is designed to meet the compute requirements for a majority of general purpose workloads. When more performance is needed, M7i-flex instances provide the ability to exceed the baseline CPU performance and deliver up to 100 percent CPU performance for 95 percent of the time over a 24-hour window.


M7i-flex instances running at a high CPU utilization that is consistently above the baseline for long periods of time might see a gradual reduction in the maximum burst CPU throughput.

For more information, see [M7i-flex instances](#).



## Amazon EC2 instance type naming conventions

Amazon EC2 provides a variety of instance types so you can choose the type that best meets your requirements. Instance types are named based on their family, generation, processor family, additional capabilities, and size. The first position of the instance type name indicates the instance family, for example c. The second position indicates the instance generation, for example 7. The third position indicates the processor family, for example g. The remaining letters before the period indicate additional capabilities, such as instance store volumes. After the period (.) is the instance size, such as small or 4xlarge, or metal for bare metal instances.

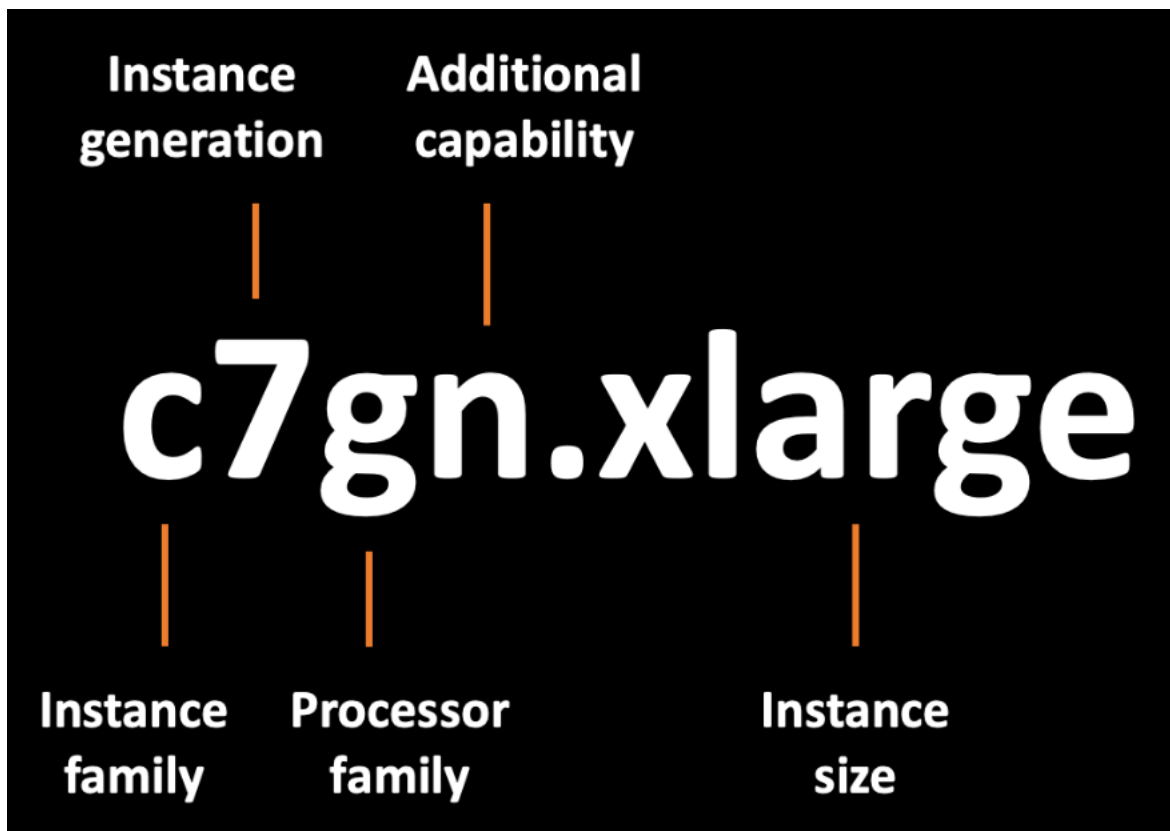

Instance families	Processor families	Additional capabilities
<ul style="list-style-type: none"> <li>• <b>C</b> – Compute optimized</li> <li>• <b>D</b> – Dense storage</li> <li>• <b>F</b> – FPGA</li> <li>• <b>G</b> – Graphics intensive</li> </ul>	<ul style="list-style-type: none"> <li>• <b>a</b> – AMD processors</li> <li>• <b>g</b> – Amazon Graviton processors</li> <li>• <b>i</b> – Intel processors</li> </ul>	<ul style="list-style-type: none"> <li>• <b>b</b> – Block storage optimization</li> <li>• <b>d</b> – Instance store volumes</li> <li>• <b>e</b> – Extra storage or memory</li> <li>• <b>flex</b> – Flex instance</li> </ul>

Instance families	Processor families	Additional capabilities
<ul style="list-style-type: none"> <li>• <b>Hpc</b> – High performance computing</li> <li>• <b>I</b> – Storage optimized</li> <li>• <b>Im</b> – Storage optimized (1 to 4 ratio of vCPU to memory)</li> <li>• <b>Is</b> – Storage optimized (1 to 6 ratio of vCPU to memory)</li> <li>• <b>Inf</b> – Amazon Inferentia</li> <li>• <b>M</b> – General purpose</li> <li>• <b>Mac</b> – macOS</li> <li>• <b>P</b> – GPU accelerated</li> <li>• <b>R</b> – Memory optimized</li> <li>• <b>T</b> – Burstable performance</li> <li>• <b>Trn</b> – Amazon Trainium</li> <li>• <b>U</b> – High memory</li> <li>• <b>VT</b> – Video transcoding</li> <li>• <b>X</b> – Memory intensive</li> </ul>		<ul style="list-style-type: none"> <li>• <b>n</b> – Network and EBS optimized</li> <li>• <b>q</b> – Qualcomm inference accelerators</li> <li>• <b>z</b> – High performance</li> </ul>

# Amazon EC2 instance type specifications

Amazon EC2 provides a wide selection of instance types optimized to fit different use cases. Instance types comprise varying combinations of CPU, memory, storage, and networking capacity and give you the flexibility to choose the appropriate mix of resources for your applications. Each instance type includes one or more instance sizes, allowing you to scale your resources to the requirements of your target workload.

We group EC2 instance into the following categories:

- **General purpose** – Provide a balance of compute, memory, and networking resources. These instances are ideal for applications that use these resources in equal proportions, such as web servers and code repositories.  
  
**Burstable performance** – The T instance family is also referred to as burstable performance instances. These instances provide a baseline CPU performance with the ability to burst above the baseline at any time. For more information, see [Burstable performance instances](#) in the *Amazon EC2 User Guide for Linux Instances*.
- **Compute optimized** – Designed for compute intensive applications that benefit from high performance processors. These instances are ideal for batch processing workloads, media transcoding, high performance web servers, high performance computing (HPC), scientific modeling, dedicated gaming servers, ad server engines, and machine learning inference.
- **Memory optimized** – Designed to deliver fast performance for workloads that process large data sets in memory.
- **Storage optimized** – Designed for workloads that require high, sequential read and write access to very large data sets on local storage. They are optimized to deliver tens of thousands of low-latency, random I/O operations per second (IOPS) to applications.
- **Accelerated computing** – Use hardware accelerators, or co-processors, to perform functions, such as floating point number calculations, graphics processing, or data pattern matching, more efficiently than is possible in software running on CPUs.
- **High-performance computing** – Purpose built to offer the best price performance for running HPC workloads at scale on Amazon. These instances are ideal for applications that benefit from high-performance processors, such as large, complex simulations and deep learning workloads.
- **Previous generation** – Amazon offers previous generation instance types for users who have optimized their applications around them and have yet to upgrade. We encourage you to use

current generation instance types to get the best performance, but we continue to support previous generation instance types.

To determine which instance types meet your requirements, such as supported Regions, compute resources, or storage resources, see [Find an Amazon EC2 instance type](#).

## Contents

- [General purpose instances](#)
- [Compute optimized instances](#)
- [Memory optimized instances](#)
- [Storage optimized instances](#)
- [Accelerated computing instances](#)
- [High-performance computing instances](#)
- [Previous generation instances](#)

## General purpose instances

General purpose instances provide a balance of compute, memory, and networking resources. These instances are ideal for applications that use these resources in equal proportions, such as web servers and code repositories.

## Contents

- [Available sizes](#)
- [Platform summary](#)
- [Performance specifications](#)
- [Network specifications](#)
- [Amazon EBS specifications](#)
- [Instance store specifications](#)
- [Security specifications](#)

## Available sizes

Instance type	Available sizes
M5	m5.large   m5.xlarge   m5.2xlarge   m5.4xlarge   m5.8xlarge   m5.12xlarge   m5.16xlarge   m5.24xlarge   m5.metal
M5a	m5a.large   m5a.xlarge   m5a.2xlarge   m5a.4xlarge   m5a.8xlarge   m5a.12xlarge   m5a.16xlarge   m5a.24xlarge
M5ad	m5ad.large   m5ad.xlarge   m5ad.2xlarge   m5ad.4xlarge   m5ad.8xlarge   m5ad.12xlarge   m5ad.16xlarge   m5ad.24xlarge
M5d	m5d.large   m5d.xlarge   m5d.2xlarge   m5d.4xlarge   m5d.8xlarge   m5d.12xlarge   m5d.16xlarge   m5d.24xlarge   m5d.metal
M5dn	m5dn.large   m5dn.xlarge   m5dn.2xlarge   m5dn.4xlarge   m5dn.8xlarge   m5dn.12xlarge   m5dn.16xlarge   m5dn.24xlarge   m5dn.metal
M5n	m5n.large   m5n.xlarge   m5n.2xlarge   m5n.4xlarge   m5n.8xlarge   m5n.12xlarge   m5n.16xlarge   m5n.24xlarge   m5n.metal
M5zn	m5zn.large   m5zn.xlarge   m5zn.2xlarge   m5zn.3xlarge   m5zn.6xlarge   m5zn.12xlarge   m5zn.metal
M6a	m6a.large   m6a.xlarge   m6a.2xlarge   m6a.4xlarge   m6a.8xlarge   m6a.12xlarge   m6a.16xlarge   m6a.24xlarge   m6a.32xlarge   m6a.48xlarge   m6a.metal
M6g	m6g.medium   m6g.large   m6g.xlarge   m6g.2xlarge   m6g.4xlarge   m6g.8xlarge   m6g.12xlarge   m6g.16xlarge   m6g.metal
M6gd	m6gd.medium   m6gd.large   m6gd.xlarge   m6gd.2xlarge   m6gd.4xlarge   m6gd.8xlarge   m6gd.12xlarge   m6gd.16xlarge   m6gd.metal

Instance type	Available sizes
M6i	m6i.large   m6i.xlarge   m6i.2xlarge   m6i.4xlarge   m6i.8xlarge   m6i.12xlarge   m6i.16xlarge   m6i.24xlarge   m6i.32xlarge   m6i.metal
M6id	m6id.large   m6id.xlarge   m6id.2xlarge   m6id.4xlarge   m6id.8xlarge   m6id.12xlarge   m6id.16xlarge   m6id.24xlarge   m6id.32xlarge   m6id.metal
M6idn	m6idn.large   m6idn.xlarge   m6idn.2xlarge   m6idn.4xlarge   m6idn.8xlarge   m6idn.12xlarge   m6idn.16xlarge   m6idn.24xlarge   m6idn.32xlarge   m6idn.metal
M6in	m6in.large   m6in.xlarge   m6in.2xlarge   m6in.4xlarge   m6in.8xlarge   m6in.12xlarge   m6in.16xlarge   m6in.24xlarge   m6in.32xlarge   m6in.metal
M7a	m7a.medium   m7a.large   m7a.xlarge   m7a.2xlarge   m7a.4xlarge   m7a.8xlarge   m7a.12xlarge   m7a.16xlarge   m7a.24xlarge   m7a.32xlarge   m7a.48xlarge   m7a.metal-48xl
M7g	m7g.medium   m7g.large   m7g.xlarge   m7g.2xlarge   m7g.4xlarge   m7g.8xlarge   m7g.12xlarge   m7g.16xlarge   m7g.metal
M7gd	m7gd.medium   m7gd.large   m7gd.xlarge   m7gd.2xlarge   m7gd.4xlarge   m7gd.8xlarge   m7gd.12xlarge   m7gd.16xlarge   m7gd.metal
M7i	m7i.large   m7i.xlarge   m7i.2xlarge   m7i.4xlarge   m7i.8xlarge   m7i.12xlarge   m7i.16xlarge   m7i.24xlarge   m7i.48xlarge   m7i.metal-24xl   m7i.metal-48xl
M7i-flex	m7i-flex.large   m7i-flex.xlarge   m7i-flex.2xlarge   m7i-flex.4xlarge   m7i-flex.8xlarge
Mac1	mac1.metal

Instance type	Available sizes
Mac2	mac2.metal
Mac2-m2	mac2-m2.metal
Mac2-m2pro	mac2-m2pro.metal
T2	t2.nano   t2.micro   t2.small   t2.medium   t2.large   t2.xlarge   t2.2xlarge
T3	t3.nano   t3.micro   t3.small   t3.medium   t3.large   t3.xlarge   t3.2xlarge
T3a	t3a.nano   t3a.micro   t3a.small   t3a.medium   t3a.large   t3a.xlarge   t3a.2xlarge
T4g	t4g.nano   t4g.micro   t4g.small   t4g.medium   t4g.large   t4g.xlarge   t4g.2xlarge

## Platform summary

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
M5	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
M5a	Nitro	AMD (x86_64)	x	x	✓	✓	Windows   Linux
M5ad	Nitro	AMD (x86_64)	x	x	✓	✓	Windows   Linux

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
M5d	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
M5dn	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
M5n	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
M5zn	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
M6a	Nitro	AMD (x86_64)	✓	✓	✓	✗	Windows   Linux
M6g	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
M6gd	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
M6i	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
M6id	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
M6idn	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
M6in	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux



Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
M7a	Nitro	AMD (x86_64)	✓	✓	✓	✗	Windows   Linux
M7g	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
M7gd	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
M7i	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
M7i-flex	Nitro	Intel (x86_64)	✗	✗	✓	✓	Windows   Linux
Mac1	Nitro	Intel (x86_64_mac)	✓	✓	✗	✗	Linux
Mac2	Nitro	Apple (arm64_mac)	✓	✓	✗	✗	Linux
Mac2-m2	Nitro	Apple (arm64_mac)	✓	✓	✗	✗	Linux
Mac2-m2pro	Nitro	Apple (arm64_mac)	✓	✓	✗	✗	Linux

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
T2	Xen	Intel (x86_64)	x	x	✓	✓	Windows   Linux
T3	Nitro	Intel (x86_64)	x	✓	✓	✓	Windows   Linux
T3a	Nitro	AMD (x86_64)	x	x	✓	✓	Windows   Linux
T4g	Nitro	Amazon Graviton (arm64)	x	x	✓	x	Linux

## Performance specifications

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>M5</b>							
m5.large	x	8.00	Intel Xeon Platinum 8175	2	1	2	x
m5.xlarge	x	16.00	Intel Xeon Platinum 8175	4	2	2	x
m5.2xlarge	x	32.00	Intel Xeon Platinum 8175	8	4	2	x
m5.4xlarge	x	64.00	Intel Xeon Platinum 8175	16	8	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m5.8xlarge	X	128.00	Intel Xeon Platinum 8175	32	16	2	X
m5.12xlarge	X	192.00	Intel Xeon Platinum 8175	48	24	2	X
m5.16xlarge	X	256.00	Intel Xeon Platinum 8175	64	32	2	X
m5.24xlarge	X	384.00	Intel Xeon Platinum 8175	96	48	2	X
m5.metal	X	384.00	Intel Xeon Platinum 8175	96	48	2	X
<b>M5a</b>							
m5a.large	X	8.00	AMD EPYC 7571	2	1	2	X
m5a.xlarge	X	16.00	AMD EPYC 7571	4	2	2	X
m5a.2xlarge	X	32.00	AMD EPYC 7571	8	4	2	X
m5a.4xlarge	X	64.00	AMD EPYC 7571	16	8	2	X
m5a.8xlarge	X	128.00	AMD EPYC 7571	32	16	2	X
m5a.12xlarge	X	192.00	AMD EPYC 7571	48	24	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m5a.16xlarge	X	256.00	AMD EPYC 7571	64	32	2	X
m5a.24xlarge	X	384.00	AMD EPYC 7571	96	48	2	X
<b>M5ad</b>							
m5ad.large	X	8.00	AMD EPYC 7571	2	1	2	X
m5ad.xlarge	X	16.00	AMD EPYC 7571	4	2	2	X
m5ad.2xlarge	X	32.00	AMD EPYC 7571	8	4	2	X
m5ad.4xlarge	X	64.00	AMD EPYC 7571	16	8	2	X
m5ad.8xlarge	X	128.00	AMD EPYC 7571	32	16	2	X
m5ad.12xlarge	X	192.00	AMD EPYC 7571	48	24	2	X
m5ad.16xlarge	X	256.00	AMD EPYC 7571	64	32	2	X
m5ad.24xlarge	X	384.00	AMD EPYC 7571	96	48	2	X
<b>M5d</b>							
m5d.large	X	8.00	Intel Xeon Platinum 8175	2	1	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m5d.xlarge	X	16.00	Intel Xeon Platinum 8175	4	2	2	X
m5d.2xlarge	X	32.00	Intel Xeon Platinum 8175	8	4	2	X
m5d.4xlarge	X	64.00	Intel Xeon Platinum 8175	16	8	2	X
m5d.8xlarge	X	128.00	Intel Xeon Platinum 8175	32	16	2	X
m5d.12xlarge	X	192.00	Intel Xeon Platinum 8175	48	24	2	X
m5d.16xlarge	X	256.00	Intel Xeon Platinum 8175	64	32	2	X
m5d.24xlarge	X	384.00	Intel Xeon Platinum 8175	96	48	2	X
m5d.metal	X	384.00	Intel Xeon Platinum 8175	96	48	2	X
<b>M5dn</b>							
m5dn.large	X	8.00	Intel Xeon Platinum 8259	2	1	2	X
m5dn.xlarge	X	16.00	Intel Xeon Platinum 8259	4	2	2	X
m5dn.2xlarge	X	32.00	Intel Xeon Platinum 8259	8	4	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m5dn.4xlarge	X	64.00	Intel Xeon Platinum 8259	16	8	2	X
m5dn.8xlarge	X	128.00	Intel Xeon Platinum 8259	32	16	2	X
m5dn.12xlarge	X	192.00	Intel Xeon Platinum 8259	48	24	2	X
m5dn.16xlarge	X	256.00	Intel Xeon Platinum 8259	64	32	2	X
m5dn.24xlarge	X	384.00	Intel Xeon Platinum 8259	96	48	2	X
m5dn.metal	X	384.00	Intel Xeon Platinum 8259	96	48	2	X
<b>M5n</b>							
m5n.large	X	8.00	Intel Xeon Platinum 8259	2	1	2	X
m5n.xlarge	X	16.00	Intel Xeon Platinum 8259	4	2	2	X
m5n.2xlarge	X	32.00	Intel Xeon Platinum 8259	8	4	2	X
m5n.4xlarge	X	64.00	Intel Xeon Platinum 8259	16	8	2	X
m5n.8xlarge	X	128.00	Intel Xeon Platinum 8259	32	16	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m5n.12xlarge	x	192.00	Intel Xeon Platinum 8259	48	24	2	x
m5n.16xlarge	x	256.00	Intel Xeon Platinum 8259	64	32	2	x
m5n.24xlarge	x	384.00	Intel Xeon Platinum 8259	96	48	2	x
m5n.metal	x	384.00	Intel Xeon Platinum 8259	96	48	2	x
<b>M5zn</b>							
m5zn.large	x	8.00	Intel Xeon Platinum 8252	2	1	2	x
m5zn.xlarge	x	16.00	Intel Xeon Platinum 8252	4	2	2	x
m5zn.2xlarge	x	32.00	Intel Xeon Platinum 8252	8	4	2	x
m5zn.3xlarge	x	48.00	Intel Xeon Platinum 8252	12	6	2	x
m5zn.6xlarge	x	96.00	Intel Xeon Platinum 8252	24	12	2	x
m5zn.12xlarge	x	192.00	Intel Xeon Platinum 8252	48	24	2	x
m5zn.metal	x	192.00	Intel Xeon Platinum 8252	48	24	2	x

### M6a

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m6a.large	X	8.00	AMD EPYC 7R13	2	1	2	X
m6a.xlarge	X	16.00	AMD EPYC 7R13	4	2	2	X
m6a.2xlarge	X	32.00	AMD EPYC 7R13	8	4	2	X
m6a.4xlarge	X	64.00	AMD EPYC 7R13	16	8	2	X
m6a.8xlarge	X	128.00	AMD EPYC 7R13	32	16	2	X
m6a.12xlarge	X	192.00	AMD EPYC 7R13	48	24	2	X
m6a.16xlarge	X	256.00	AMD EPYC 7R13	64	32	2	X
m6a.24xlarge	X	384.00	AMD EPYC 7R13	96	48	2	X
m6a.32xlarge	X	512.00	AMD EPYC 7R13	128	64	2	X
m6a.48xlarge	X	768.00	AMD EPYC 7R13	192	96	2	X
m6a.metal	X	768.00	AMD EPYC 7R13	192	96	2	X

### M6g



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m6g.medium	x	4.00	Amazon Graviton2 Processor	1	1	1	x
m6g.large	x	8.00	Amazon Graviton2 Processor	2	2	1	x
m6g.xlarge	x	16.00	Amazon Graviton2 Processor	4	4	1	x
m6g.2xlarge	x	32.00	Amazon Graviton2 Processor	8	8	1	x
m6g.4xlarge	x	64.00	Amazon Graviton2 Processor	16	16	1	x
m6g.8xlarge	x	128.00	Amazon Graviton2 Processor	32	32	1	x
m6g.12xlarge	x	192.00	Amazon Graviton2 Processor	48	48	1	x
m6g.16xlarge	x	256.00	Amazon Graviton2 Processor	64	64	1	x
m6g.metal	x	256.00	Amazon Graviton2 Processor	64	64	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>M6gd</b>							
m6gd.medium	x	4.00	Amazon Graviton2 Processor	1	1	1	x
m6gd.large	x	8.00	Amazon Graviton2 Processor	2	2	1	x
m6gd.xlarge	x	16.00	Amazon Graviton2 Processor	4	4	1	x
m6gd.2xlarge	x	32.00	Amazon Graviton2 Processor	8	8	1	x
m6gd.4xlarge	x	64.00	Amazon Graviton2 Processor	16	16	1	x
m6gd.8xlarge	x	128.00	Amazon Graviton2 Processor	32	32	1	x
m6gd.12xlarge	x	192.00	Amazon Graviton2 Processor	48	48	1	x
m6gd.16xlarge	x	256.00	Amazon Graviton2 Processor	64	64	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m6gd.metal	x	256.00	Amazon Graviton2 Processor	64	64	1	x

### M6i

m6i.large	x	8.00	Intel Xeon Ice Lake	2	1	2	x
m6i.xlarge	x	16.00	Intel Xeon Ice Lake	4	2	2	x
m6i.2xlarge	x	32.00	Intel Xeon Ice Lake	8	4	2	x
m6i.4xlarge	x	64.00	Intel Xeon Ice Lake	16	8	2	x
m6i.8xlarge	x	128.00	Intel Xeon Ice Lake	32	16	2	x
m6i.12xlarge	x	192.00	Intel Xeon Ice Lake	48	24	2	x
m6i.16xlarge	x	256.00	Intel Xeon Ice Lake	64	32	2	x
m6i.24xlarge	x	384.00	Intel Xeon Ice Lake	96	48	2	x
m6i.32xlarge	x	512.00	Intel Xeon Ice Lake	128	64	2	x
m6i.metal	x	512.00	Intel Xeon Ice Lake	128	64	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>M6id</b>							
m6id.large	<i>x</i>	8.00	Intel Xeon Ice Lake	2	1	2	<i>x</i>
m6id.xlarge	<i>x</i>	16.00	Intel Xeon Ice Lake	4	2	2	<i>x</i>
m6id.2xlarge	<i>x</i>	32.00	Intel Xeon Ice Lake	8	4	2	<i>x</i>
m6id.4xlarge	<i>x</i>	64.00	Intel Xeon Ice Lake	16	8	2	<i>x</i>
m6id.8xlarge	<i>x</i>	128.00	Intel Xeon Ice Lake	32	16	2	<i>x</i>
m6id.12xlarge	<i>x</i>	192.00	Intel Xeon Ice Lake	48	24	2	<i>x</i>
m6id.16xlarge	<i>x</i>	256.00	Intel Xeon Ice Lake	64	32	2	<i>x</i>
m6id.24xlarge	<i>x</i>	384.00	Intel Xeon Ice Lake	96	48	2	<i>x</i>
m6id.32xlarge	<i>x</i>	512.00	Intel Xeon Ice Lake	128	64	2	<i>x</i>
m6id.metal	<i>x</i>	512.00	Intel Xeon Ice Lake	128	64	2	<i>x</i>
<b>M6idn</b>							
m6idn.large	<i>x</i>	8.00	Intel Xeon Ice Lake	2	1	2	<i>x</i>

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m6idn.xlarge	X	16.00	Intel Xeon Ice Lake	4	2	2	X
m6idn.2xlarge	X	32.00	Intel Xeon Ice Lake	8	4	2	X
m6idn.4xlarge	X	64.00	Intel Xeon Ice Lake	16	8	2	X
m6idn.8xlarge	X	128.00	Intel Xeon Ice Lake	32	16	2	X
m6idn.12xlarge	X	192.00	Intel Xeon Ice Lake	48	24	2	X
m6idn.16xlarge	X	256.00	Intel Xeon Ice Lake	64	32	2	X
m6idn.24xlarge	X	384.00	Intel Xeon Ice Lake	96	48	2	X
m6idn.32xlarge	X	512.00	Intel Xeon Ice Lake	128	64	2	X
m6idn.metal	X	512.00	Intel Xeon Ice Lake	128	64	2	X
<b>M6in</b>							
m6in.large	X	8.00	Intel Xeon Ice Lake	2	1	2	X
m6in.xlarge	X	16.00	Intel Xeon Ice Lake	4	2	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m6in.2xlarge	x	32.00	Intel Xeon Ice Lake	8	4	2	x
m6in.4xlarge	x	64.00	Intel Xeon Ice Lake	16	8	2	x
m6in.8xlarge	x	128.00	Intel Xeon Ice Lake	32	16	2	x
m6in.12xlarge	x	192.00	Intel Xeon Ice Lake	48	24	2	x
m6in.16xlarge	x	256.00	Intel Xeon Ice Lake	64	32	2	x
m6in.24xlarge	x	384.00	Intel Xeon Ice Lake	96	48	2	x
m6in.32xlarge	x	512.00	Intel Xeon Ice Lake	128	64	2	x
m6in.metal	x	512.00	Intel Xeon Ice Lake	128	64	2	x
<b>M7a</b>							
m7a.medium	x	4.00	AMD EPYC 9R14	1	1	1	x
m7a.large	x	8.00	AMD EPYC 9R14	2	2	1	x
m7a.xlarge	x	16.00	AMD EPYC 9R14	4	4	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m7a.2xlarge	X	32.00	AMD EPYC 9R14	8	8	1	X
m7a.4xlarge	X	64.00	AMD EPYC 9R14	16	16	1	X
m7a.8xlarge	X	128.00	AMD EPYC 9R14	32	32	1	X
m7a.12xlarge	X	192.00	AMD EPYC 9R14	48	48	1	X
m7a.16xlarge	X	256.00	AMD EPYC 9R14	64	64	1	X
m7a.24xlarge	X	384.00	AMD EPYC 9R14	96	96	1	X
m7a.32xlarge	X	512.00	AMD EPYC 9R14	128	128	1	X
m7a.48xlarge	X	768.00	AMD EPYC 9R14	192	192	1	X
m7a.metal-48xl	X	768.00	AMD EPYC 9R14	192	192	1	X
<b>M7g</b>							
m7g.medium	X	4.00	Amazon Graviton3 Processor	1	1	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m7g.large	x	8.00	Amazon Graviton3 Processor	2	2	1	x
m7g.xlarge	x	16.00	Amazon Graviton3 Processor	4	4	1	x
m7g.2xlarge	x	32.00	Amazon Graviton3 Processor	8	8	1	x
m7g.4xlarge	x	64.00	Amazon Graviton3 Processor	16	16	1	x
m7g.8xlarge	x	128.00	Amazon Graviton3 Processor	32	32	1	x
m7g.12xlarge	x	192.00	Amazon Graviton3 Processor	48	48	1	x
m7g.16xlarge	x	256.00	Amazon Graviton3 Processor	64	64	1	x
m7g.metal	x	256.00	Amazon Graviton3 Processor	64	64	1	x
<b>M7gd</b>							



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m7gd.medium	x	4.00	Amazon Graviton3 Processor	1	1	1	x
m7gd.large	x	8.00	Amazon Graviton3 Processor	2	2	1	x
m7gd.xlarge	x	16.00	Amazon Graviton3 Processor	4	4	1	x
m7gd.2xlarge	x	32.00	Amazon Graviton3 Processor	8	8	1	x
m7gd.4xlarge	x	64.00	Amazon Graviton3 Processor	16	16	1	x
m7gd.8xlarge	x	128.00	Amazon Graviton3 Processor	32	32	1	x
m7gd.12xlarge	x	192.00	Amazon Graviton3 Processor	48	48	1	x
m7gd.16xlarge	x	256.00	Amazon Graviton3 Processor	64	64	1	x
m7gd.metal	x	256.00	Amazon Graviton3 Processor	64	64	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>M7i</b>							
m7i.large	x	8.00	Intel Xeon Sapphire Rapids	2	1	2	x
m7i.xlarge	x	16.00	Intel Xeon Sapphire Rapids	4	2	2	x
m7i.2xlarge	x	32.00	Intel Xeon Sapphire Rapids	8	4	2	x
m7i.4xlarge	x	64.00	Intel Xeon Sapphire Rapids	16	8	2	x
m7i.8xlarge	x	128.00	Intel Xeon Sapphire Rapids	32	16	2	x
m7i.12xlarge	x	192.00	Intel Xeon Sapphire Rapids	48	24	2	x
m7i.16xlarge	x	256.00	Intel Xeon Sapphire Rapids	64	32	2	x
m7i.24xlarge	x	384.00	Intel Xeon Sapphire Rapids	96	48	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m7i.48xlarge	x	768.00	Intel Xeon Sapphire Rapids	192	96	2	x
m7i.metal-24xl	x	384.00	Intel Xeon Sapphire Rapids	96	48	2	x
m7i.metal-48xl	x	768.00	Intel Xeon Sapphire Rapids	192	96	2	x
<b>M7i-flex</b>							
m7i-flex.large	x	8.00	Intel Xeon Sapphire Rapids	2	1	2	x
m7i-flex.xlarge	x	16.00	Intel Xeon Sapphire Rapids	4	2	2	x
m7i-flex.2xlarge	x	32.00	Intel Xeon Sapphire Rapids	8	4	2	x
m7i-flex.4xlarge	x	64.00	Intel Xeon Sapphire Rapids	16	8	2	x
m7i-flex.8xlarge	x	128.00	Intel Xeon Sapphire Rapids	32	16	2	x
<b>Mac1</b>							

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
mac1.metal	X	32.00	Intel Core i7-8700B	12	6	2	X
<b>Mac2</b>							
mac2.metal	X	16.00	Apple M1 chip with 8-core CPU	8	4	2	X
<b>Mac2-m2</b>							
mac2-m2.metal	X	24.00	Apple M2 with 8-core CPU	8	8	1	X
<b>Mac2-m2pro</b>							
mac2-m2pro.metal	X	32.00	Apple M2 Pro with 12-core CPU	12	12	1	X
<b>T2</b>							
t2.nano	✓	0.50	Intel Xeon Family	1	1	1	X
t2.micro	✓	1.00	Intel Xeon Family	1	1	1	X
t2.small	✓	2.00	Intel Xeon Family	1	1	1	X
t2.medium	✓	4.00	Intel Broadwell E5-2686v4	2	2	1	X
t2.large	✓	8.00	Intel Broadwell E5-2686v4	2	2	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
t2.xlarge	✓	16.00	Intel Broadwell E5-2686v4	4	4	1	x
t2.2xlarge	✓	32.00	Intel Broadwell E5-2686v4	8	8	1	x
<b>T3</b>							
t3.nano	✓	0.50	Intel Skylake P-8175	2	1	2	x
t3.micro	✓	1.00	Intel Skylake P-8175	2	1	2	x
t3.small	✓	2.00	Intel Skylake P-8175	2	1	2	x
t3.medium	✓	4.00	Intel Skylake P-8175	2	1	2	x
t3.large	✓	8.00	Intel Skylake P-8175	2	1	2	x
t3.xlarge	✓	16.00	Intel Skylake P-8175	4	2	2	x
t3.2xlarge	✓	32.00	Intel Skylake P-8175	8	4	2	x
<b>T3a</b>							
t3a.nano	✓	0.50	AMD EPYC 7571	2	1	2	x
t3a.micro	✓	1.00	AMD EPYC 7571	2	1	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
t3a.small	✓	2.00	AMD EPYC 7571	2	1	2	x
t3a.medium	✓	4.00	AMD EPYC 7571	2	1	2	x
t3a.large	✓	8.00	AMD EPYC 7571	2	1	2	x
t3a.xlarge	✓	16.00	AMD EPYC 7571	4	2	2	x
t3a.2xlarge	✓	32.00	AMD EPYC 7571	8	4	2	x
<b>T4g</b>							
t4g.nano	✓	0.50	Amazon Graviton2 Processor	2	2	1	x
t4g.micro	✓	1.00	Amazon Graviton2 Processor	2	2	1	x
t4g.small	✓	2.00	Amazon Graviton2 Processor	2	2	1	x
t4g.medium	✓	4.00	Amazon Graviton2 Processor	2	2	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
t4g.large	✓	8.00	Amazon Graviton2 Processor	2	2	1	x
t4g.xlarge	✓	16.00	Amazon Graviton2 Processor	4	4	1	x
t4g.2xlarge	✓	32.00	Amazon Graviton2 Processor	8	8	1	x

## Network specifications

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>M5</b>								
m5.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
m5.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
m5.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
m5.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
m5.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
m5.12xlarge	12 Gigabit	x	✓	x	1	8	30	✓
m5.16xlarge	20 Gigabit	x	✓	x	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m5.24xlarge	25 Gigabit	x	✓	x	1	15	50	✓
m5.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>M5a</b>								
m5a.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
m5a.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
m5a.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
m5a.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
m5a.8xlarge <sup>1</sup>	7.5 / 10.0	x	✓	x	1	8	30	✓
m5a.12xlarge	10 Gigabit	x	✓	x	1	8	30	✓
m5a.16xlarge	12 Gigabit	x	✓	x	1	15	50	✓
m5a.24xlarge	20 Gigabit	x	✓	x	1	15	50	✓
<b>M5ad</b>								
m5ad.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
m5ad.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
m5ad.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
m5ad.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
m5ad.8xlarge <sup>1</sup>	7.5 / 10.0	x	✓	x	1	8	30	✓



Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m5ad.12xlarge	10 Gigabit	x	✓	x	1	8	30	✓
m5ad.16xlarge	12 Gigabit	x	✓	x	1	15	50	✓
m5ad.24xlarge	20 Gigabit	x	✓	x	1	15	50	✓
<b>M5d</b>								
m5d.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
m5d.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
m5d.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
m5d.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
m5d.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
m5d.12xlarge	12 Gigabit	x	✓	x	1	8	30	✓
m5d.16xlarge	20 Gigabit	x	✓	x	1	15	50	✓
m5d.24xlarge	25 Gigabit	x	✓	x	1	15	50	✓
m5d.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>M5dn</b>								
m5dn.large <sup>1</sup>	2.1 / 25.0	x	✓	x	1	3	10	✓
m5dn.xlarge <sup>1</sup>	4.1 / 25.0	x	✓	x	1	4	15	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m5dn.2xlarge <sup>1</sup>	8.125 / 25.0	x	✓	x	1	4	15	✓
m5dn.4xlarge <sup>1</sup>	16.25 / 25.0	x	✓	x	1	8	30	✓
m5dn.8xlarge	25 Gigabit	x	✓	x	1	8	30	✓
m5dn.12xlarge	50 Gigabit	x	✓	x	1	8	30	✓
m5dn.16xlarge	75 Gigabit	x	✓	x	1	15	50	✓
m5dn.24xlarge	100 Gigabit	✓	✓	x	1	15	50	✓
m5dn.metal	100 Gigabit	✓	✓	x	1	15	50	✓
<b>M5n</b>								
m5n.large <sup>1</sup>	2.1 / 25.0	x	✓	x	1	3	10	✓
m5n.xlarge <sup>1</sup>	4.1 / 25.0	x	✓	x	1	4	15	✓
m5n.2xlarge <sup>1</sup>	8.125 / 25.0	x	✓	x	1	4	15	✓
m5n.4xlarge <sup>1</sup>	16.25 / 25.0	x	✓	x	1	8	30	✓
m5n.8xlarge	25 Gigabit	x	✓	x	1	8	30	✓
m5n.12xlarge	50 Gigabit	x	✓	x	1	8	30	✓
m5n.16xlarge	75 Gigabit	x	✓	x	1	15	50	✓
m5n.24xlarge	100 Gigabit	✓	✓	x	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m5n.metal	100 Gigabit	✓	✓	✗	1	15	50	✓
<b>M5zn</b>								
m5zn.large <sup>1</sup>	3.0 / 25.0	✗	✓	✗	1	3	10	✓
m5zn.xlarge <sup>1</sup>	5.0 / 25.0	✗	✓	✗	1	4	15	✓
m5zn.2xlarge <sup>1</sup>	10.0 / 25.0	✗	✓	✗	1	4	15	✓
m5zn.3xlarge <sup>1</sup>	15.0 / 25.0	✗	✓	✗	1	8	30	✓
m5zn.6xlarge	50 Gigabit	✗	✓	✗	1	8	30	✓
m5zn.12xlarge	100 Gigabit	✓	✓	✗	1	15	50	✓
m5zn.metal	100 Gigabit	✓	✓	✗	1	15	50	✓
<b>M6a</b>								
m6a.large <sup>1</sup>	0.781 / 12.5	✗	✓	✗	1	3	10	✓
m6a.xlarge <sup>1</sup>	1.562 / 12.5	✗	✓	✗	1	4	15	✓
m6a.2xlarge <sup>1</sup>	3.125 / 12.5	✗	✓	✗	1	4	15	✓
m6a.4xlarge <sup>1</sup>	6.25 / 12.5	✗	✓	✗	1	8	30	✓
m6a.8xlarge	12.5 Gigabit	✗	✓	✗	1	8	30	✓
m6a.12xlarge	18.75 Gigabit	✗	✓	✗	1	8	30	✓
m6a.16xlarge	25 Gigabit	✗	✓	✗	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m6a.24xlarge	37.5 Gigabit	x	✓	x	1	15	50	✓
m6a.32xlarge	50 Gigabit	x	✓	x	1	15	50	✓
m6a.48xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
m6a.metal	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>M6g</b>								
m6g.medium <sup>1</sup>	0.5 / 10.0	x	✓	x	1	2	4	✓
m6g.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
m6g.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
m6g.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
m6g.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
m6g.8xlarge	12 Gigabit	x	✓	x	1	8	30	✓
m6g.12xlarge	20 Gigabit	x	✓	x	1	8	30	✓
m6g.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
m6g.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>M6gd</b>								
m6gd.medium <sup>1</sup>	0.5 / 10.0	x	✓	x	1	2	4	✓
m6gd.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m6gd.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
m6gd.2xlarge <sub>1</sub>	2.5 / 10.0	x	✓	x	1	4	15	✓
m6gd.4xlarge <sub>1</sub>	5.0 / 10.0	x	✓	x	1	8	30	✓
m6gd.8xlarge	12 Gigabit	x	✓	x	1	8	30	✓
m6gd.12xlarge	20 Gigabit	x	✓	x	1	8	30	✓
m6gd.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
m6gd.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>M6i</b>								
m6i.large <sup>1</sup>	0.781 / 12.5	x	✓	x	1	3	10	✓
m6i.xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
m6i.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓
m6i.4xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
m6i.8xlarge	12.5 Gigabit	x	✓	✓	1	8	30	✓
m6i.12xlarge	18.75 Gigabit	x	✓	✓	1	8	30	✓
m6i.16xlarge	25 Gigabit	x	✓	✓	1	15	50	✓
m6i.24xlarge	37.5 Gigabit	x	✓	✓	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m6i.32xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
m6i.metal	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>M6id</b>								
m6id.large <sup>1</sup>	0.781 / 12.5	✗	✓	✗	1	3	10	✓
m6id.xlarge <sup>1</sup>	1.562 / 12.5	✗	✓	✗	1	4	15	✓
m6id.2xlarge <sup>1</sup>	3.125 / 12.5	✗	✓	✗	1	4	15	✓
m6id.4xlarge <sup>1</sup>	6.25 / 12.5	✗	✓	✗	1	8	30	✓
m6id.8xlarge	12.5 Gigabit	✗	✓	✓	1	8	30	✓
m6id.12xlarge	18.75 Gigabit	✗	✓	✓	1	8	30	✓
m6id.16xlarge	25 Gigabit	✗	✓	✓	1	15	50	✓
m6id.24xlarge	37.5 Gigabit	✗	✓	✓	1	15	50	✓
m6id.32xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
m6id.metal	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>M6idn</b>								
m6idn.large <sup>1</sup>	3.125 / 25.0	✗	✓	✗	1	3	10	✓
m6idn.xlarge <sup>1</sup>	6.25 / 30.0	✗	✓	✗	1	4	15	✓
m6idn.2xlarge <sup>1</sup>	12.5 / 40.0	✗	✓	✗	1	4	15	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m6idn.4xlarge <sup>1</sup>	25.0 / 50.0	x	✓	x	1	8	30	✓
m6idn.8xlarge	50 Gigabit	x	✓	x	1	8	30	✓
m6idn.12xlarge	75 Gigabit	x	✓	x	1	8	30	✓
m6idn.16xlarge	100 Gigabit	x	✓	x	1	15	50	✓
m6idn.24xlarge	150 Gigabit	x	✓	x	1	15	50	✓
m6idn.32xlarge	200 Gigabit	✓	✓	x	2	16	50	✓
m6idn.metal	200 Gigabit	✓	✓	x	2	16	50	✓
<b>M6in</b>								
m6in.large <sup>1</sup>	3.125 / 25.0	x	✓	x	1	3	10	✓
m6in.xlarge <sup>1</sup>	6.25 / 30.0	x	✓	x	1	4	15	✓
m6in.2xlarge <sup>1</sup>	12.5 / 40.0	x	✓	x	1	4	15	✓
m6in.4xlarge <sup>1</sup>	25.0 / 50.0	x	✓	x	1	8	30	✓
m6in.8xlarge	50 Gigabit	x	✓	x	1	8	30	✓
m6in.12xlarge	75 Gigabit	x	✓	x	1	8	30	✓
m6in.16xlarge	100 Gigabit	x	✓	x	1	15	50	✓
m6in.24xlarge	150 Gigabit	x	✓	x	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m6in.32xlarge	200 Gigabit	✓	✓	✗	2	16	50	✓
m6in.metal	200 Gigabit	✓	✓	✗	2	16	50	✓
<b>M7a</b>								
m7a.medium <sup>1</sup>	0.39 / 12.5	✗	✓	✗	1	2	4	✓
m7a.large <sup>1</sup>	0.781 / 12.5	✗	✓	✗	1	3	10	✓
m7a.xlarge <sup>1</sup>	1.562 / 12.5	✗	✓	✗	1	4	15	✓
m7a.2xlarge <sup>1</sup>	3.125 / 12.5	✗	✓	✗	1	4	15	✓
m7a.4xlarge <sup>1</sup>	6.25 / 12.5	✗	✓	✗	1	8	30	✓
m7a.8xlarge	12.5 Gigabit	✗	✓	✗	1	8	30	✓
m7a.12xlarge	18.75 Gigabit	✗	✓	✗	1	8	30	✓
m7a.16xlarge	25 Gigabit	✗	✓	✗	1	15	50	✓
m7a.24xlarge	37.5 Gigabit	✗	✓	✗	1	15	50	✓
m7a.32xlarge	50 Gigabit	✗	✓	✗	1	15	50	✓
m7a.48xlarge	50 Gigabit	✓	✓	✗	1	15	50	✓
m7a.metal-48xl	50 Gigabit	✓	✓	✗	1	15	50	✓
<b>M7g</b>								
m7g.medium <sup>1</sup>	0.52 / 12.5	✗	✓	✗	1	2	4	✓



Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m7g.large <sup>1</sup>	0.937 / 12.5	x	✓	x	1	3	10	✓
m7g.xlarge <sup>1</sup>	1.876 / 12.5	x	✓	x	1	4	15	✓
m7g.2xlarge <sup>1</sup>	3.75 / 15.0	x	✓	x	1	4	15	✓
m7g.4xlarge <sup>1</sup>	7.5 / 15.0	x	✓	x	1	8	30	✓
m7g.8xlarge	15 Gigabit	x	✓	x	1	8	30	✓
m7g.12xlarge	22.5 Gigabit	x	✓	✓	1	8	30	✓
m7g.16xlarge	30 Gigabit	✓	✓	✓	1	15	50	✓
m7g.metal	30 Gigabit	✓	✓	✓	1	15	50	✓
<b>M7gd</b>								
m7gd.medium <sup>1</sup>	0.52 / 12.5	x	✓	x	1	2	4	✓
m7gd.large <sup>1</sup>	0.937 / 12.5	x	✓	x	1	3	10	✓
m7gd.xlarge <sup>1</sup>	1.876 / 12.5	x	✓	x	1	4	15	✓
m7gd.2xlarge <sup>1</sup>	3.75 / 15.0	x	✓	x	1	4	15	✓
m7gd.4xlarge <sup>1</sup>	7.5 / 15.0	x	✓	x	1	8	30	✓
m7gd.8xlarge	15 Gigabit	x	✓	x	1	8	30	✓
m7gd.12xlarge	22.5 Gigabit	x	✓	✓	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m7gd.16xlarge	30 Gigabit	✓	✓	✓	1	15	50	✓
m7gd.metal	30 Gigabit	✓	✓	✓	1	15	50	✓
<b>M7i</b>								
m7i.large <sup>1</sup>	0.781 / 12.5	x	✓	x	1	3	10	✓
m7i.xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
m7i.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓
m7i.4xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
m7i.8xlarge	12.5 Gigabit	x	✓	x	1	8	30	✓
m7i.12xlarge	18.75 Gigabit	x	✓	✓	1	8	30	✓
m7i.16xlarge	25 Gigabit	x	✓	✓	1	15	50	✓
m7i.24xlarge	37.5 Gigabit	x	✓	✓	1	15	50	✓
m7i.48xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
m7i.metal-24xl	37.5 Gigabit	x	✓	✓	1	15	50	✓
m7i.metal-48xl	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>M7i-flex</b>								
m7i-flex.large <sup>1</sup>	0.39 / 12.5	x	✓	x	1	3	10	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
m7i-flex.xlarge <sup>1</sup>	0.781 / 12.5	x	✓	x	1	4	15	✓
m7i-flex.2xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
m7i-flex.4xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	8	30	✓
m7i-flex.8xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
<b>Mac1</b>								
mac1.metal	25 Gigabit	x	✓	x	1	8	30	✓
<b>Mac2</b>								
mac2.metal	10 Gigabit	x	✓	x	1	8	30	✓
<b>Mac2-m2</b>								
mac2-m2.metal	10 Gigabit	x	✓	x	1	8	30	✓
<b>Mac2-m2pro</b>								
mac2-m2pro.metal	10 Gigabit	x	✓	x	1	8	30	✓
<b>T2</b>								
t2.nano	Low to Moderate	x	x	x	1	2	2	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
t2.micro	Low to Moderate	X	X	X	1	2	2	✓
t2.small	Low to Moderate	X	X	X	1	3	4	✓
t2.medium	Low to Moderate	X	X	X	1	3	6	✓
t2.large	Low to Moderate	X	X	X	1	3	12	✓
t2.xlarge	Moderate	X	X	X	1	3	15	✓
t2.2xlarge	Moderate	X	X	X	1	3	15	✓
<b>T3</b>								
t3.nano <sup>1</sup>	0.032 / 5.0	X	✓	X	1	2	2	✓
t3.micro <sup>1</sup>	0.064 / 5.0	X	✓	X	1	2	2	✓
t3.small <sup>1</sup>	0.128 / 5.0	X	✓	X	1	3	4	✓
t3.medium <sup>1</sup>	0.256 / 5.0	X	✓	X	1	3	6	✓
t3.large <sup>1</sup>	0.512 / 5.0	X	✓	X	1	3	12	✓
t3.xlarge <sup>1</sup>	1.024 / 5.0	X	✓	X	1	4	15	✓
t3.2xlarge <sup>1</sup>	2.048 / 5.0	X	✓	X	1	4	15	✓
<b>T3a</b>								
t3a.nano <sup>1</sup>	0.032 / 5.0	X	✓	X	1	2	2	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
t3a.micro <sup>1</sup>	0.064 / 5.0	x	✓	x	1	2	2	✓
t3a.small <sup>1</sup>	0.128 / 5.0	x	✓	x	1	2	4	✓
t3a.medium <sup>1</sup>	0.256 / 5.0	x	✓	x	1	3	6	✓
t3a.large <sup>1</sup>	0.512 / 5.0	x	✓	x	1	3	12	✓
t3a.xlarge <sup>1</sup>	1.024 / 5.0	x	✓	x	1	4	15	✓
t3a.2xlarge <sup>1</sup>	2.048 / 5.0	x	✓	x	1	4	15	✓
<b>T4g</b>								
t4g.nano <sup>1</sup>	0.032 / 5.0	x	✓	x	1	2	2	✓
t4g.micro <sup>1</sup>	0.064 / 5.0	x	✓	x	1	2	2	✓
t4g.small <sup>1</sup>	0.128 / 5.0	x	✓	x	1	3	4	✓
t4g.medium <sup>1</sup>	0.256 / 5.0	x	✓	x	1	3	6	✓
t4g.large <sup>1</sup>	0.512 / 5.0	x	✓	x	1	3	12	✓
t4g.xlarge <sup>1</sup>	1.024 / 5.0	x	✓	x	1	4	15	✓
t4g.2xlarge <sup>1</sup>	2.048 / 5.0	x	✓	x	1	4	15	✓

**Note**

<sup>1</sup> These instances have a baseline bandwidth and can use a network I/O credit mechanism to burst beyond their baseline bandwidth on a best effort basis. Other instances types can sustain their maximum performance indefinitely. For more information, see [instance network bandwidth](#).

For 32xlarge and metal instance types that support 200 Gbps, at least 2 ENIs, each attached to a different network card, are required on the instance to achieve 200 Gbps throughput. Each ENI attached to a network card can achieve a max of 170 Gbps.

## Amazon EBS specifications

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>M5</b>					
m5.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	3600.00 / 18750.00	✓	default
m5.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 18750.00	✓	default
m5.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	12000.00 / 18750.00	✓	default
m5.4xlarge	4750.00	593.75	18750.00	✓	default
m5.8xlarge	6800.00	850.00	30000.00	✓	default
m5.12xlarge	9500.00	1187.50	40000.00	✓	default
m5.16xlarge	13600.00	1700.00	60000.00	✓	default
m5.24xlarge	19000.00	2375.00	80000.00	✓	default
m5.metal	19000.00	2375.00	80000.00	✓	default

### M5a

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m5a.large <sup>1</sup>	650.00 / 2880.00	81.25 / 360.00	3600.00 / 16000.00	✓	default
m5a.xlarge <sup>1</sup>	1085.00 / 2880.00	135.62 / 360.00	6000.00 / 16000.00	✓	default
m5a.2xlarge <sup>1</sup>	1580.00 / 2880.00	197.50 / 360.00	8333.00 / 16000.00	✓	default
m5a.4xlarge	2880.00	360.00	16000.00	✓	default
m5a.8xlarge	4750.00	593.75	20000.00	✓	default
m5a.12xlarge	6780.00	847.50	30000.00	✓	default
m5a.16xlarge	9500.00	1187.50	40000.00	✓	default
m5a.24xlarge	13750.00	1718.75	60000.00	✓	default
<b>M5ad</b>					
m5ad.large <sup>1</sup>	650.00 / 2880.00	81.25 / 360.00	3600.00 / 16000.00	✓	default
m5ad.xlarge <sup>1</sup>	1085.00 / 2880.00	135.62 / 360.00	6000.00 / 16000.00	✓	default
m5ad.2xlarge <sup>1</sup>	1580.00 / 2880.00	197.50 / 360.00	8333.00 / 16000.00	✓	default
m5ad.4xlarge	2880.00	360.00	16000.00	✓	default
m5ad.8xlarge	4750.00	593.75	20000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m5ad.12xlarge	6780.00	847.50	30000.00	✓	default
m5ad.16xlarge	9500.00	1187.50	40000.00	✓	default
m5ad.24xlarge	13750.00	1718.75	60000.00	✓	default
<b>M5d</b>					
m5d.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	3600.00 / 18750.00	✓	default
m5d.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 18750.00	✓	default
m5d.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	12000.00 / 18750.00	✓	default
m5d.4xlarge	4750.00	593.75	18750.00	✓	default
m5d.8xlarge	6800.00	850.00	30000.00	✓	default
m5d.12xlarge	9500.00	1187.50	40000.00	✓	default
m5d.16xlarge	13600.00	1700.00	60000.00	✓	default
m5d.24xlarge	19000.00	2375.00	80000.00	✓	default
m5d.metal	19000.00	2375.00	80000.00	✓	default



Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>M5dn</b>					
m5dn.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	3600.00 / 18750.00	✓	default
m5dn.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 18750.00	✓	default
m5dn.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	12000.00 / 18750.00	✓	default
m5dn.4xlarge	4750.00	593.75	18750.00	✓	default
m5dn.8xlarge	6800.00	850.00	30000.00	✓	default
m5dn.12xlarge	9500.00	1187.50	40000.00	✓	default
m5dn.16xlarge	13600.00	1700.00	60000.00	✓	default
m5dn.24xlarge	19000.00	2375.00	80000.00	✓	default
m5dn.metal	19000.00	2375.00	80000.00	✓	default
<b>M5n</b>					
m5n.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	3600.00 / 18750.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m5n.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 18750.00	✓	default
m5n.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	12000.00 / 18750.00	✓	default
m5n.4xlarge	4750.00	593.75	18750.00	✓	default
m5n.8xlarge	6800.00	850.00	30000.00	✓	default
m5n.12xlarge	9500.00	1187.50	40000.00	✓	default
m5n.16xlarge	13600.00	1700.00	60000.00	✓	default
m5n.24xlarge	19000.00	2375.00	80000.00	✓	default
m5n.metal	19000.00	2375.00	80000.00	✓	default
<b>M5zn</b>					
m5zn.large <sup>1</sup>	800.00 / 3170.00	100.00 / 396.25	3333.00 / 13333.00	✓	default
m5zn.xlarge <sup>1</sup>	1564.00 / 3170.00	195.50 / 396.25	6667.00 / 13333.00	✓	default
m5zn.2xlarge	3170.00	396.25	13333.00	✓	default
m5zn.3xlarge	4750.00	593.75	20000.00	✓	default
m5zn.6xlarge	9500.00	1187.50	40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m5zn.12xlarge	19000.00	2375.00	80000.00	✓	default
m5zn.metal	19000.00	2375.00	80000.00	✓	default
<b>M6a</b>					
m6a.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
m6a.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
m6a.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
m6a.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
m6a.8xlarge	10000.00	1250.00	40000.00	✓	default
m6a.12xlarge	15000.00	1875.00	60000.00	✓	default
m6a.16xlarge	20000.00	2500.00	80000.00	✓	default
m6a.24xlarge	30000.00	3750.00	120000.00	✓	default
m6a.32xlarge	40000.00	5000.00	160000.00	✓	default
m6a.48xlarge	40000.00	5000.00	240000.00	✓	default
m6a.metal	40000.00	5000.00	240000.00	✓	default
<b>M6g</b>					

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m6g.medium <sup>1</sup>	315.00 / 4750.00	39.38 / 593.75	2500.00 / 20000.00	✓	default
m6g.large <sup>1</sup>	630.00 / 4750.00	78.75 / 593.75	3600.00 / 20000.00	✓	default
m6g.xlarge <sup>1</sup>	1188.00 / 4750.00	148.50 / 593.75	6000.00 / 20000.00	✓	default
m6g.2xlarge <sup>1</sup>	2375.00 / 4750.00	296.88 / 593.75	12000.00 / 20000.00	✓	default
m6g.4xlarge	4750.00	593.75	20000.00	✓	default
m6g.8xlarge	9500.00	1187.50	40000.00	✓	default
m6g.12xlarge	14250.00	1781.25	50000.00	✓	default
m6g.16xlarge	19000.00	2375.00	80000.00	✓	default
m6g.metal	19000.00	2375.00	80000.00	✓	default
<b>M6gd</b>					
m6gd.medium <sup>1</sup>	315.00 / 4750.00	39.38 / 593.75	2500.00 / 20000.00	✓	default
m6gd.large <sup>1</sup>	630.00 / 4750.00	78.75 / 593.75	3600.00 / 20000.00	✓	default
m6gd.xlarge <sup>1</sup>	1188.00 / 4750.00	148.50 / 593.75	6000.00 / 20000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m6gd.2xlarge <sup>1</sup>	2375.00 / 4750.00	296.88 / 593.75	12000.00 / 20000.00	✓	default
m6gd.4xlarge	4750.00	593.75	20000.00	✓	default
m6gd.8xlarge	9500.00	1187.50	40000.00	✓	default
m6gd.12xlarge	14250.00	1781.25	50000.00	✓	default
m6gd.16xlarge	19000.00	2375.00	80000.00	✓	default
m6gd.metal	19000.00	2375.00	80000.00	✓	default
<b>M6i</b>					
m6i.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
m6i.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
m6i.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
m6i.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
m6i.8xlarge	10000.00	1250.00	40000.00	✓	default
m6i.12xlarge	15000.00	1875.00	60000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m6i.16xlarge	20000.00	2500.00	80000.00	✓	default
m6i.24xlarge	30000.00	3750.00	120000.00	✓	default
m6i.32xlarge	40000.00	5000.00	160000.00	✓	default
m6i.metal	40000.00	5000.00	160000.00	✓	default
<b>M6id</b>					
m6id.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
m6id.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
m6id.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
m6id.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
m6id.8xlarge	10000.00	1250.00	40000.00	✓	default
m6id.12xlarge	15000.00	1875.00	60000.00	✓	default
m6id.16xlarge	20000.00	2500.00	80000.00	✓	default
m6id.24xlarge	30000.00	3750.00	120000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m6id.32xlarge	40000.00	5000.00	160000.00	✓	default
m6id.metal	40000.00	5000.00	160000.00	✓	default
<b>M6idn</b>					
m6idn.large <sup>1</sup>	1562.00 / 25000.00	195.31 / 3125.00	6250.00 / 100000.00	✓	default
m6idn.xlarge <sup>1</sup>	3125.00 / 25000.00	390.62 / 3125.00	12500.00 / 100000.00	✓	default
m6idn.2xlarge <sup>1</sup>	6250.00 / 25000.00	781.25 / 3125.00	25000.00 / 100000.00	✓	default
m6idn.4xlarge <sup>1</sup>	12500.00 / 25000.00	1562.50 / 3125.00	50000.00 / 100000.00	✓	default
m6idn.8xlarge	25000.00	3125.00	100000.00	✓	default
m6idn.12xlarge	37500.00	4687.50	150000.00	✓	default
m6idn.16xlarge	50000.00	6250.00	200000.00	✓	default
m6idn.24xlarge	75000.00	9375.00	300000.00	✓	default
m6idn.32xlarge	100000.00	12500.00	400000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m6idn.metal	100000.00	12500.00	400000.00	✓	default
<b>M6in</b>					
m6in.large <sup>1</sup>	1562.00 / 25000.00	195.31 / 3125.00	6250.00 / 100000.00	✓	default
m6in.xlarge <sup>1</sup>	3125.00 / 25000.00	390.62 / 3125.00	12500.00 / 100000.00	✓	default
m6in.2xlarge <sup>1</sup>	6250.00 / 25000.00	781.25 / 3125.00	25000.00 / 100000.00	✓	default
m6in.4xlarge <sup>1</sup>	12500.00 / 25000.00	1562.50 / 3125.00	50000.00 / 100000.00	✓	default
m6in.8xlarge	25000.00	3125.00	100000.00	✓	default
m6in.12xlarge	37500.00	4687.50	150000.00	✓	default
m6in.16xlarge	50000.00	6250.00	200000.00	✓	default
m6in.24xlarge	75000.00	9375.00	300000.00	✓	default
m6in.32xlarge	100000.00	12500.00	400000.00	✓	default
m6in.metal	100000.00	12500.00	400000.00	✓	default

**M7a**



Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m7a.medium <sup>1</sup>	325.00 / 10000.00	40.62 / 1250.00	2500.00 / 40000.00	✓	default
m7a.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
m7a.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
m7a.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
m7a.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
m7a.8xlarge	10000.00	1250.00	40000.00	✓	default
m7a.12xlarge	15000.00	1875.00	60000.00	✓	default
m7a.16xlarge	20000.00	2500.00	80000.00	✓	default
m7a.24xlarge	30000.00	3750.00	120000.00	✓	default
m7a.32xlarge	40000.00	5000.00	160000.00	✓	default
m7a.48xlarge	40000.00	5000.00	240000.00	✓	default
m7a.metal-48xl	40000.00	5000.00	240000.00	✓	default
<b>M7g</b>					
m7g.medium <sup>1</sup>	315.00 / 10000.00	39.38 / 1250.00	2500.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m7g.large <sup>1</sup>	630.00 / 10000.00	78.75 / 1250.00	3600.00 / 40000.00	✓	default
m7g.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
m7g.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
m7g.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
m7g.8xlarge	10000.00	1250.00	40000.00	✓	default
m7g.12xlarge	15000.00	1875.00	60000.00	✓	default
m7g.16xlarge	20000.00	2500.00	80000.00	✓	default
m7g.metal	20000.00	2500.00	80000.00	✓	default
<b>M7gd</b>					
m7gd.medium <sup>1</sup>	315.00 / 10000.00	39.38 / 1250.00	2500.00 / 40000.00	✓	default
m7gd.large <sup>1</sup>	630.00 / 10000.00	78.75 / 1250.00	3600.00 / 40000.00	✓	default
m7gd.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m7gd.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
m7gd.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
m7gd.8xlarge	10000.00	1250.00	40000.00	✓	default
m7gd.12xlarge	15000.00	1875.00	60000.00	✓	default
m7gd.16xlarge	20000.00	2500.00	80000.00	✓	default
m7gd.metal	20000.00	2500.00	80000.00	✓	default
<b>M7i</b>					
m7i.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
m7i.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
m7i.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
m7i.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
m7i.8xlarge	10000.00	1250.00	40000.00	✓	default
m7i.12xlarge	15000.00	1875.00	60000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
m7i.16xlarge	20000.00	2500.00	80000.00	✓	default
m7i.24xlarge	30000.00	3750.00	120000.00	✓	default
m7i.48xlarge	40000.00	5000.00	240000.00	✓	default
m7i.metal-24xl	30000.00	3750.00	120000.00	✓	default
m7i.metal-48xl	40000.00	5000.00	240000.00	✓	default
<b>M7i-flex</b>					
m7i-flex.large <sup>1</sup>	312.00 / 10000.00	39.06 / 1250.00	2500.00 / 40000.00	✓	default
m7i-flex.xlarge <sup>1</sup>	625.00 / 10000.00	78.12 / 1250.00	3600.00 / 40000.00	✓	default
m7i-flex.2xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
m7i-flex.4xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
m7i-flex.8xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
<b>Mac1</b>					
mac1.metal	14000.00	1750.00	80000.00	✓	default
<b>Mac2</b>					

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
mac2.metal	10000.00	1250.00	55000.00	✓	default
<b>Mac2-m2</b>					
mac2-m2.metal	8000.00	1000.00	55000.00	✓	default
<b>Mac2-m2pro</b>					
mac2-m2pro.metal	8000.00	1000.00	55000.00	✓	default
<b>T2</b>					
<b>T3</b>					
t3.nano <sup>1</sup>	43.00 / 2085.00	5.38 / 260.62	250.00 / 11800.00	✓	default
t3.micro <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11800.00	✓	default
t3.small <sup>1</sup>	174.00 / 2085.00	21.75 / 260.62	1000.00 / 11800.00	✓	default
t3.medium <sup>1</sup>	347.00 / 2085.00	43.38 / 260.62	2000.00 / 11800.00	✓	default
t3.large <sup>1</sup>	695.00 / 2780.00	86.88 / 347.50	4000.00 / 15700.00	✓	default
t3.xlarge <sup>1</sup>	695.00 / 2780.00	86.88 / 347.50	4000.00 / 15700.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
t3.2xlarge <sup>1</sup>	695.00 / 2780.00	86.88 / 347.50	4000.00 / 15700.00	✓	default

**T3a**

t3a.nano <sup>1</sup>	45.00 / 2085.00	5.62 / 260.62	250.00 / 11800.00	✓	default
t3a.micro <sup>1</sup>	90.00 / 2085.00	11.25 / 260.62	500.00 / 11800.00	✓	default
t3a.small <sup>1</sup>	175.00 / 2085.00	21.88 / 260.62	1000.00 / 11800.00	✓	default
t3a.medium <sup>1</sup>	350.00 / 2085.00	43.75 / 260.62	2000.00 / 11800.00	✓	default
t3a.large <sup>1</sup>	695.00 / 2780.00	86.88 / 347.50	4000.00 / 15700.00	✓	default
t3a.xlarge <sup>1</sup>	695.00 / 2780.00	86.88 / 347.50	4000.00 / 15700.00	✓	default
t3a.2xlarge <sup>1</sup>	695.00 / 2780.00	86.88 / 347.50	4000.00 / 15700.00	✓	default

**T4g**

t4g.nano <sup>1</sup>	43.00 / 2085.00	5.38 / 260.62	250.00 / 11800.00	✓	default
t4g.micro <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11800.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
t4g.small <sup>1</sup>	174.00 / 2085.00	21.75 / 260.62	1000.00 / 11800.00	✓	default
t4g.medium <sup>1</sup>	347.00 / 2085.00	43.38 / 260.62	2000.00 / 11800.00	✓	default
t4g.large <sup>1</sup>	695.00 / 2780.00	86.88 / 347.50	4000.00 / 15700.00	✓	default
t4g.xlarge <sup>1</sup>	695.00 / 2780.00	86.88 / 347.50	4000.00 / 15700.00	✓	default
t4g.2xlarge <sup>1</sup>	695.00 / 2780.00	86.88 / 347.50	4000.00 / 15700.00	✓	default

**Note**

<sup>1</sup> These instances can support maximum performance for 30 minutes at least once every 24 hours, after which they revert to their baseline performance. Other instances can sustain the maximum performance indefinitely. If your workload requires sustained maximum performance for longer than 30 minutes, use one of these instances.

<sup>2</sup> default indicates that instances are enabled for EBS optimization by default.

supported indicates that instances can optionally be enabled for EBS optimization For more information, see [Amazon EBS-optimized instances](#).

## Instance store specifications

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
<b>M5ad</b>					
m5ad.large	1 x 75 GB	NVMe SSD	30,000 / 15,000		✓
m5ad.xlarge	1 x 150 GB	NVMe SSD	59,000 / 29,000		✓
m5ad.2xlarge	1 x 300 GB	NVMe SSD	117,000 / 57,000		✓
m5ad.4xlarge	2 x 300 GB	NVMe SSD	234,000 / 114,000		✓
m5ad.8xlarge	2 x 600 GB	NVMe SSD	466,666 / 233,334		✓
m5ad.12xlarge	2 x 900 GB	NVMe SSD	700,000 / 340,000		✓
m5ad.16xlarge	4 x 600 GB	NVMe SSD	933,332 / 466,668		✓
m5ad.24xlarge	4 x 900 GB	NVMe SSD	1,400,000 / 680,000		✓
<b>M5d</b>					
m5d.large	1 x 75 GB	NVMe SSD	30,000 / 15,000		✓
m5d.xlarge	1 x 150 GB	NVMe SSD	59,000 / 29,000		✓



Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
m5d.2xlarge	1 x 300 GB	NVMe SSD	117,000 / 57,000		✓
m5d.4xlarge	2 x 300 GB	NVMe SSD	234,000 / 114,000		✓
m5d.8xlarge	2 x 600 GB	NVMe SSD	466,666 / 233,334		✓
m5d.12xlarge	2 x 900 GB	NVMe SSD	700,000 / 340,000		✓
m5d.16xlarge	4 x 600 GB	NVMe SSD	933,332 / 466,668		✓
m5d.24xlarge	4 x 900 GB	NVMe SSD	1,400,000 / 680,000		✓
m5d.metal	4 x 900 GB	NVMe SSD	1,400,000 / 680,000		✓
<b>M5dn</b>					
m5dn.large	1 x 75 GB	NVMe SSD	29,000 / 14,500		✓
m5dn.xlarge	1 x 150 GB	NVMe SSD	58,000 / 29,000		✓
m5dn.2xlarge	1 x 300 GB	NVMe SSD	116,000 / 58,000		✓
m5dn.4xlarge	2 x 300 GB	NVMe SSD	232,000 / 116,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
m5dn.8xlarge	2 x 600 GB	NVMe SSD	464,000 / 232,000		✓
m5dn.12xlarge	2 x 900 GB	NVMe SSD	700,000 / 350,000		✓
m5dn.16xlarge	4 x 600 GB	NVMe SSD	930,000 / 465,000		✓
m5dn.24xlarge	4 x 900 GB	NVMe SSD	1,400,000 / 700,000		✓
m5dn.metal	4 x 900 GB	NVMe SSD	1,400,000 / 700,000		✓
<b>M6gd</b>					
m6gd.medium	1 x 59 GB	NVMe SSD	13,438 / 5,625		✓
m6gd.large	1 x 118 GB	NVMe SSD	26,875 / 11,250		✓
m6gd.xlarge	1 x 237 GB	NVMe SSD	53,750 / 22,500		✓
m6gd.2xlarge	1 x 474 GB	NVMe SSD	107,500 / 45,000		✓
m6gd.4xlarge	1 x 950 GB	NVMe SSD	215,000 / 90,000		✓
m6gd.8xlarge	1 x 1900 GB	NVMe SSD	430,000 / 180,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
m6gd.12xlarge	2 x 1425 GB	NVMe SSD	645,000 / 270,000		✓
m6gd.16xlarge	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
m6gd.metal	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
<b>M6id</b>					
m6id.large	1 x 118 GB	NVMe SSD	33,542 / 16,771		✓
m6id.xlarge	1 x 237 GB	NVMe SSD	67,083 / 33,542		✓
m6id.2xlarge	1 x 474 GB	NVMe SSD	134,167 / 67,084		✓
m6id.4xlarge	1 x 950 GB	NVMe SSD	268,333 / 134,167		✓
m6id.8xlarge	1 x 1900 GB	NVMe SSD	536,666 / 268,334		✓
m6id.12xlarge	2 x 1425 GB	NVMe SSD	804,998 / 402,500		✓
m6id.16xlarge	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓
m6id.24xlarge	4 x 1425 GB	NVMe SSD	1,609,996 / 805,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
m6id.32xlarge	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓
m6id.metal	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓
<b>M6idn</b>					
m6idn.large	1 x 118 GB	NVMe SSD	33,542 / 16,771		✓
m6idn.xlarge	1 x 237 GB	NVMe SSD	67,083 / 33,542		✓
m6idn.2xlarge	1 x 474 GB	NVMe SSD	134,167 / 67,084		✓
m6idn.4xlarge	1 x 950 GB	NVMe SSD	268,333 / 134,167		✓
m6idn.8xlarge	1 x 1900 GB	NVMe SSD	536,666 / 268,334		✓
m6idn.12xlarge	2 x 1425 GB	NVMe SSD	804,998 / 402,500		✓
m6idn.16xlarge	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓
m6idn.24xlarge	4 x 1425 GB	NVMe SSD	1,609,996 / 805,000		✓
m6idn.32xlarge	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
m6idn.metal	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓
<b>M7gd</b>					
m7gd.medium	1 x 59 GB	NVMe SSD	16,771 / 8,385		✓
m7gd.large	1 x 118 GB	NVMe SSD	33,542 / 16,771		✓
m7gd.xlarge	1 x 237 GB	NVMe SSD	67,083 / 33,542		✓
m7gd.2xlarge	1 x 474 GB	NVMe SSD	134,167 / 67,084		✓
m7gd.4xlarge	1 x 950 GB	NVMe SSD	268,333 / 134,167		✓
m7gd.8xlarge	1 x 1900 GB	NVMe SSD	536,666 / 268,334		✓
m7gd.12xlarge	2 x 1425 GB	NVMe SSD	804,998 / 402,500		✓
m7gd.16xlarge	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓
m7gd.metal	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓

<sup>1</sup> Volumes attached to certain instances suffer a first-write penalty unless initialized. For more information, see [Optimize disk performance for instance store volumes](#).

<sup>2</sup> For more information, see [Instance store volume TRIM support](#).

## Security specifications

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>M5</b>						
m5.large	✓	Instance store not supported	X	X	✓	X
m5.xlarge	✓	Instance store not supported	X	X	✓	✓
m5.2xlarge	✓	Instance store not supported	X	X	✓	✓
m5.4xlarge	✓	Instance store not supported	X	X	✓	✓
m5.8xlarge	✓	Instance store not supported	X	X	✓	✓
m5.12xlarge	✓	Instance store not supported	X	X	✓	✓
m5.16xlarge	✓	Instance store not supported	X	X	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m5.24xlarge	✓	Instance store not supported	X	X	✓	✓
m5.metal	✓	Instance store not supported	X	X	X	X
<b>M5a</b>						
m5a.large	✓	Instance store not supported	X	X	✓	X
m5a.xlarge	✓	Instance store not supported	X	X	✓	✓
m5a.2xlarge	✓	Instance store not supported	X	X	✓	✓
m5a.4xlarge	✓	Instance store not supported	X	X	✓	✓
m5a.8xlarge	✓	Instance store not supported	X	X	✓	✓
m5a.12xlarge	✓	Instance store not supported	X	X	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m5a.16xlarge	✓	Instance store not supported	X	X	✓	✓
m5a.24xlarge	✓	Instance store not supported	X	X	✓	✓
<b>M5ad</b>						
m5ad.large	✓	✓	X	X	✓	X
m5ad.xlarge	✓	✓	X	X	✓	✓
m5ad.2xlarge	✓	✓	X	X	✓	✓
m5ad.4xlarge	✓	✓	X	X	✓	✓
m5ad.8xlarge	✓	✓	X	X	✓	✓
m5ad.12xlarge	✓	✓	X	X	✓	✓
m5ad.16xlarge	✓	✓	X	X	✓	✓
m5ad.24xlarge	✓	✓	X	X	✓	✓
<b>M5d</b>						
m5d.large	✓	✓	X	X	✓	X
m5d.xlarge	✓	✓	X	X	✓	✓
m5d.2xlarge	✓	✓	X	X	✓	✓
m5d.4xlarge	✓	✓	X	X	✓	✓



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m5d.8xlarge	✓	✓	X	X	✓	✓
m5d.12xlarge	✓	✓	X	X	✓	✓
m5d.16xlarge	✓	✓	X	X	✓	✓
m5d.24xlarge	✓	✓	X	X	✓	✓
m5d.metal	✓	✓	X	X	X	X
<b>M5dn</b>						
m5dn.large	✓	✓	✓	X	✓	X
m5dn.xlarge	✓	✓	✓	X	✓	✓
m5dn.2xlarge	✓	✓	✓	X	✓	✓
m5dn.4xlarge	✓	✓	✓	X	✓	✓
m5dn.8xlarge	✓	✓	✓	X	✓	✓
m5dn.12xlarge	✓	✓	✓	X	✓	✓
m5dn.16xlarge	✓	✓	✓	X	✓	✓
m5dn.24xlarge	✓	✓	✓	X	✓	✓
m5dn.metal	✓	✓	✓	X	X	X
<b>M5n</b>						
m5n.large	✓	Instance store not supported	✓	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m5n.xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5n.2xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5n.4xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5n.8xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5n.12xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5n.16xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5n.24xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5n.metal	✓	Instance store not supported	✓	✗	✗	✗
<b>M5zn</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m5zn.large	✓	Instance store not supported	✓	✗	✓	✗
m5zn.xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5zn.2xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5zn.3xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5zn.6xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5zn.12xlarge	✓	Instance store not supported	✓	✗	✓	✓
m5zn.metal	✓	Instance store not supported	✓	✗	✗	✗
<b>M6a</b>						
m6a.large	✓	Instance store not supported	✓	✓	✓	✗

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m6a.xlarge	✓	Instance store not supported	✓	✓	✓	✓
m6a.2xlarge	✓	Instance store not supported	✓	✓	✓	✓
m6a.4xlarge	✓	Instance store not supported	✓	✓	✓	✓
m6a.8xlarge	✓	Instance store not supported	✓	✓	✓	✓
m6a.12xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6a.16xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6a.24xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6a.32xlarge	✓	Instance store not supported	✓	✗	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m6a.48xlarge	✓	Instance store not supported	✓	X	✓	✓
m6a.metal	✓	Instance store not supported	✓	X	X	X
<b>M6g</b>						
m6g.medium	✓	Instance store not supported	X	X	X	X
m6g.large	✓	Instance store not supported	X	X	X	✓
m6g.xlarge	✓	Instance store not supported	X	X	X	✓
m6g.2xlarge	✓	Instance store not supported	X	X	X	✓
m6g.4xlarge	✓	Instance store not supported	X	X	X	✓
m6g.8xlarge	✓	Instance store not supported	X	X	X	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m6g.12xlarge	✓	Instance store not supported	X	X	X	✓
m6g.16xlarge	✓	Instance store not supported	X	X	X	✓
m6g.metal	✓	Instance store not supported	X	X	X	X
<b>M6gd</b>						
m6gd.medium	✓	✓	X	X	X	X
m6gd.large	✓	✓	X	X	X	✓
m6gd.xlarge	✓	✓	X	X	X	✓
m6gd.2xlarge	✓	✓	X	X	X	✓
m6gd.4xlarge	✓	✓	X	X	X	✓
m6gd.8xlarge	✓	✓	X	X	X	✓
m6gd.12xlarge	✓	✓	X	X	X	✓
m6gd.16xlarge	✓	✓	X	X	X	✓
m6gd.metal	✓	✓	X	X	X	X
<b>M6i</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m6i.large	✓	Instance store not supported	✓	✗	✓	✗
m6i.xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6i.2xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6i.4xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6i.8xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6i.12xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6i.16xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6i.24xlarge	✓	Instance store not supported	✓	✗	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m6i.32xlarge	✓	Instance store not supported	✓	X	✓	✓
m6i.metal	✓	Instance store not supported	✓	X	X	X
<b>M6id</b>						
m6id.large	✓	✓	✓	X	✓	X
m6id.xlarge	✓	✓	✓	X	✓	✓
m6id.2xlarge	✓	✓	✓	X	✓	✓
m6id.4xlarge	✓	✓	✓	X	✓	✓
m6id.8xlarge	✓	✓	✓	X	✓	✓
m6id.12xlarge	✓	✓	✓	X	✓	✓
m6id.16xlarge	✓	✓	✓	X	✓	✓
m6id.24xlarge	✓	✓	✓	X	✓	✓
m6id.32xlarge	✓	✓	✓	X	✓	✓
m6id.metal	✓	✓	✓	X	X	X
<b>M6idn</b>						
m6idn.large	✓	✓	✓	X	✓	X
m6idn.xlarge	✓	✓	✓	X	✓	✓



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m6idn.2xlarge	✓	✓	✓	✗	✓	✓
m6idn.4xlarge	✓	✓	✓	✗	✓	✓
m6idn.8xlarge	✓	✓	✓	✗	✓	✓
m6idn.12xlarge	✓	✓	✓	✗	✓	✓
m6idn.16xlarge	✓	✓	✓	✗	✓	✓
m6idn.24xlarge	✓	✓	✓	✗	✓	✓
m6idn.32xlarge	✓	✓	✓	✗	✓	✓
m6idn.metal	✓	✓	✓	✗	✗	✗
<b>M6in</b>						
m6in.large	✓	Instance store not supported	✓	✗	✓	✗
m6in.xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6in.2xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6in.4xlarge	✓	Instance store not supported	✓	✗	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m6in.8xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6in.12xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6in.16xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6in.24xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6in.32xlarge	✓	Instance store not supported	✓	✗	✓	✓
m6in.metal	✓	Instance store not supported	✓	✗	✗	✗
<b>M7a</b>						
m7a.medium	✓	Instance store not supported	✓	✗	✓	✗
m7a.large	✓	Instance store not supported	✓	✗	✓	✗

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m7a.xlarge	✓	Instance store not supported	✓	X	✓	X
m7a.2xlarge	✓	Instance store not supported	✓	X	✓	X
m7a.4xlarge	✓	Instance store not supported	✓	X	✓	X
m7a.8xlarge	✓	Instance store not supported	✓	X	✓	X
m7a.12xlarge	✓	Instance store not supported	✓	X	✓	X
m7a.16xlarge	✓	Instance store not supported	✓	X	✓	X
m7a.24xlarge	✓	Instance store not supported	✓	X	✓	X
m7a.32xlarge	✓	Instance store not supported	✓	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m7a.48xlarge	✓	Instance store not supported	✓	X	✓	X
m7a.metal-48xl	✓	Instance store not supported	✓	X	X	X
<b>M7g</b>						
m7g.medium	✓	Instance store not supported	✓	X	X	X
m7g.large	✓	Instance store not supported	✓	X	X	X
m7g.xlarge	✓	Instance store not supported	✓	X	X	X
m7g.2xlarge	✓	Instance store not supported	✓	X	X	X
m7g.4xlarge	✓	Instance store not supported	✓	X	X	X
m7g.8xlarge	✓	Instance store not supported	✓	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m7g.12xlarge	✓	Instance store not supported	✓	X	X	X
m7g.16xlarge	✓	Instance store not supported	✓	X	X	X
m7g.metal	✓	Instance store not supported	✓	X	X	X
<b>M7gd</b>						
m7gd.medium	✓	✓	✓	X	X	X
m7gd.large	✓	✓	✓	X	X	X
m7gd.xlarge	✓	✓	✓	X	X	X
m7gd.2xlarge	✓	✓	✓	X	X	X
m7gd.4xlarge	✓	✓	✓	X	X	X
m7gd.8xlarge	✓	✓	✓	X	X	X
m7gd.12xlarge	✓	✓	✓	X	X	X
m7gd.16xlarge	✓	✓	✓	X	X	X
m7gd.metal	✓	✓	✓	X	X	X
<b>M7i</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m7i.large	✓	Instance store not supported	✓	X	✓	X
m7i.xlarge	✓	Instance store not supported	✓	X	✓	X
m7i.2xlarge	✓	Instance store not supported	✓	X	✓	X
m7i.4xlarge	✓	Instance store not supported	✓	X	✓	X
m7i.8xlarge	✓	Instance store not supported	✓	X	✓	X
m7i.12xlarge	✓	Instance store not supported	✓	X	✓	X
m7i.16xlarge	✓	Instance store not supported	✓	X	✓	X
m7i.24xlarge	✓	Instance store not supported	✓	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m7i.48xlarge	✓	Instance store not supported	✓	X	✓	X
m7i.metal-24xl	✓	Instance store not supported	✓	X	X	X
m7i.metal-48xl	✓	Instance store not supported	✓	X	X	X
<b>M7i-flex</b>						
m7i-flex.large	✓	Instance store not supported	✓	X	✓	X
m7i-flex.xlarge	✓	Instance store not supported	✓	X	✓	X
m7i-flex.2xlarge	✓	Instance store not supported	✓	X	✓	X
m7i-flex.4xlarge	✓	Instance store not supported	✓	X	✓	X
m7i-flex.8xlarge	✓	Instance store not supported	✓	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>Mac1</b>						
mac1.metal	✓	Instance store not supported	X	X	X	X
<b>Mac2</b>						
mac2.metal	✓	Instance store not supported	X	X	X	X
<b>Mac2-m2</b>						
mac2-m2.metal	✓	Instance store not supported	X	X	X	X
<b>Mac2-m2pro</b>						
mac2-m2pro.metal	✓	Instance store not supported	X	X	X	X
<b>T2</b>						
t2.nano	✓	Instance store not supported	X	X	X	X
t2.micro	✓	Instance store not supported	X	X	X	X



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
t2.small	✓	Instance store not supported	X	X	X	X
t2.medium	✓	Instance store not supported	X	X	X	X
t2.large	✓	Instance store not supported	X	X	X	X
t2.xlarge	✓	Instance store not supported	X	X	X	X
t2.2xlarge	✓	Instance store not supported	X	X	X	X
<b>T3</b>						
t3.nano	✓	Instance store not supported	X	X	✓	X
t3.micro	✓	Instance store not supported	X	X	✓	X
t3.small	✓	Instance store not supported	X	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
t3.medium	✓	Instance store not supported	X	X	✓	X
t3.large	✓	Instance store not supported	X	X	✓	X
t3.xlarge	✓	Instance store not supported	X	X	✓	X
t3.2xlarge	✓	Instance store not supported	X	X	✓	X
<b>T3a</b>						
t3a.nano	✓	Instance store not supported	X	X	✓	X
t3a.micro	✓	Instance store not supported	X	X	✓	X
t3a.small	✓	Instance store not supported	X	X	✓	X
t3a.medium	✓	Instance store not supported	X	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
t3a.large	✓	Instance store not supported	X	X	✓	X
t3a.xlarge	✓	Instance store not supported	X	X	✓	X
t3a.2xlarge	✓	Instance store not supported	X	X	✓	X
<b>T4g</b>						
t4g.nano	✓	Instance store not supported	X	X	X	X
t4g.micro	✓	Instance store not supported	X	X	X	X
t4g.small	✓	Instance store not supported	X	X	X	X
t4g.medium	✓	Instance store not supported	X	X	X	X
t4g.large	✓	Instance store not supported	X	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
t4g.xlarge	✓	Instance store not supported	X	X	X	X
t4g.2xlarge	✓	Instance store not supported	X	X	X	X

## Compute optimized instances

Compute optimized instances are designed for compute intensive applications that benefit from high performance processors. These instances are ideal for batch processing workloads, media transcoding, high performance web servers, high performance computing (HPC), scientific modeling, dedicated gaming servers, ad server engines, and machine learning inference.

### Contents

- [Available sizes](#)
- [Platform summary](#)
- [Performance specifications](#)
- [Network specifications](#)
- [Amazon EBS specifications](#)
- [Instance store specifications](#)
- [Security specifications](#)

## Available sizes

Instance type	Available sizes
C5	c5.large   c5.xlarge   c5.2xlarge   c5.4xlarge   c5.9xlarge   c5.12xlarge   c5.18xlarge   c5.24xlarge   c5.metal
C5a	c5a.large   c5a.xlarge   c5a.2xlarge   c5a.4xlarge   c5a.8xlarge   c5a.12xlarge   c5a.16xlarge   c5a.24xlarge
C5ad	c5ad.large   c5ad.xlarge   c5ad.2xlarge   c5ad.4xlarge   c5ad.8xlarge   c5ad.12xlarge   c5ad.16xlarge   c5ad.24xlarge
C5d	c5d.large   c5d.xlarge   c5d.2xlarge   c5d.4xlarge   c5d.9xlarge   c5d.12xlarge   c5d.18xlarge   c5d.24xlarge   c5d.metal
C5n	c5n.large   c5n.xlarge   c5n.2xlarge   c5n.4xlarge   c5n.9xlarge   c5n.18xlarge   c5n.metal
C6a	c6a.large   c6a.xlarge   c6a.2xlarge   c6a.4xlarge   c6a.8xlarge   c6a.12xlarge   c6a.16xlarge   c6a.24xlarge   c6a.32xlarge   c6a.48xlarge   c6a.metal
C6g	c6g.medium   c6g.large   c6g.xlarge   c6g.2xlarge   c6g.4xlarge   c6g.8xlarge   c6g.12xlarge   c6g.16xlarge   c6g.metal
C6gd	c6gd.medium   c6gd.large   c6gd.xlarge   c6gd.2xlarge   c6gd.4xlarge   c6gd.8xlarge   c6gd.12xlarge   c6gd.16xlarge   c6gd.metal
C6gn	c6gn.medium   c6gn.large   c6gn.xlarge   c6gn.2xlarge   c6gn.4xlarge   c6gn.8xlarge   c6gn.12xlarge   c6gn.16xlarge
C6i	c6i.large   c6i.xlarge   c6i.2xlarge   c6i.4xlarge   c6i.8xlarge   c6i.12xlarge   c6i.16xlarge   c6i.24xlarge   c6i.32xlarge   c6i.metal

Instance type	Available sizes
C6id	c6id.large   c6id.xlarge   c6id.2xlarge   c6id.4xlarge   c6id.8xlarge   c6id.12xlarge   c6id.16xlarge   c6id.24xlarge   c6id.32xlarge   c6id.metal
C6in	c6in.large   c6in.xlarge   c6in.2xlarge   c6in.4xlarge   c6in.8xlarge   c6in.12xlarge   c6in.16xlarge   c6in.24xlarge   c6in.32xlarge   c6in.metal
C7a	c7a.medium   c7a.large   c7a.xlarge   c7a.2xlarge   c7a.4xlarge   c7a.8xlarge   c7a.12xlarge   c7a.16xlarge   c7a.24xlarge   c7a.32xlarge   c7a.48xlarge   c7a.metal-48xl
C7g	c7g.medium   c7g.large   c7g.xlarge   c7g.2xlarge   c7g.4xlarge   c7g.8xlarge   c7g.12xlarge   c7g.16xlarge   c7g.metal
C7gd	c7gd.medium   c7gd.large   c7gd.xlarge   c7gd.2xlarge   c7gd.4xlarge   c7gd.8xlarge   c7gd.12xlarge   c7gd.16xlarge   c7gd.metal
C7gn	c7gn.medium   c7gn.large   c7gn.xlarge   c7gn.2xlarge   c7gn.4xlarge   c7gn.8xlarge   c7gn.12xlarge   c7gn.16xlarge   c7gn.metal
C7i	c7i.large   c7i.xlarge   c7i.2xlarge   c7i.4xlarge   c7i.8xlarge   c7i.12xlarge   c7i.16xlarge   c7i.24xlarge   c7i.48xlarge   c7i.metal-24xl   c7i.metal-48xl

## Platform summary

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
C5	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
C5a	Nitro	AMD (x86_64)	✗	✗	✓	✗	Windows   Linux
C5ad	Nitro	AMD (x86_64)	✗	✗	✓	✗	Windows   Linux
C5d	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
C5n	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
C6a	Nitro	AMD (x86_64)	✓	✓	✓	✗	Windows   Linux
C6g	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
C6gd	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
C6gn	Nitro	Amazon Graviton (arm64)	✗	✓	✓	✗	Linux
C6i	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
C6id	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
C6in	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
C7a	Nitro	AMD (x86_64)	✓	✓	✓	✓	Windows   Linux
C7g	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
C7gd	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
C7gn	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
C7i	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux

## Performance specifications

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>C5</b>							



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c5.large	x	4.00	Intel Xeon Platinum 8124M	2	1	2	x
c5.xlarge	x	8.00	Intel Xeon Platinum 8124M	4	2	2	x
c5.2xlarge	x	16.00	Intel Xeon Platinum 8124M	8	4	2	x
c5.4xlarge	x	32.00	Intel Xeon Platinum 8124M	16	8	2	x
c5.9xlarge	x	72.00	Intel Xeon Platinum 8124M	36	18	2	x
c5.12xlarge	x	96.00	2nd Gen Intel Xeon Platinum 8275CL	48	24	2	x
c5.18xlarge	x	144.00	Intel Xeon Platinum 8124M	72	36	2	x
c5.24xlarge	x	192.00	2nd Gen Intel Xeon Platinum 8275CL	96	48	2	x
c5.metal	x	192.00	2nd Gen Intel Xeon Platinum 8275CL	96	48	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>C5a</b>							
c5a.large	X	4.00	2nd Gen AMD EPYC 7R32	2	1	2	X
c5a.xlarge	X	8.00	2nd Gen AMD EPYC 7R32	4	2	2	X
c5a.2xlarge	X	16.00	2nd Gen AMD EPYC 7R32	8	4	2	X
c5a.4xlarge	X	32.00	2nd Gen AMD EPYC 7R32	16	8	2	X
c5a.8xlarge	X	64.00	2nd Gen AMD EPYC 7R32	32	16	2	X
c5a.12xlarge	X	96.00	2nd Gen AMD EPYC 7R32	48	24	2	X
c5a.16xlarge	X	128.00	2nd Gen AMD EPYC 7R32	64	32	2	X
c5a.24xlarge	X	192.00	2nd Gen AMD EPYC 7R32	96	48	2	X
<b>C5ad</b>							
c5ad.large	X	4.00	2nd Gen AMD EPYC 7R32	2	1	2	X
c5ad.xlarge	X	8.00	2nd Gen AMD EPYC 7R32	4	2	2	X
c5ad.2xlarge	X	16.00	2nd Gen AMD EPYC 7R32	8	4	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c5ad.4xlarge	X	32.00	2nd Gen AMD EPYC 7R32	16	8	2	X
c5ad.8xlarge	X	64.00	2nd Gen AMD EPYC 7R32	32	16	2	X
c5ad.12xlarge	X	96.00	2nd Gen AMD EPYC 7R32	48	24	2	X
c5ad.16xlarge	X	128.00	2nd Gen AMD EPYC 7R32	64	32	2	X
c5ad.24xlarge	X	192.00	2nd Gen AMD EPYC 7R32	96	48	2	X

### C5d

c5d.large	X	4.00	Intel Xeon Platinum 8124M	2	1	2	X
c5d.xlarge	X	8.00	Intel Xeon Platinum 8124M	4	2	2	X
c5d.2xlarge	X	16.00	Intel Xeon Platinum 8124M	8	4	2	X
c5d.4xlarge	X	32.00	Intel Xeon Platinum 8124M	16	8	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c5d.9xlarge	X	72.00	Intel Xeon Platinum 8124M	36	18	2	X
c5d.12xlarge	X	96.00	2nd Gen Intel Xeon Platinum 8275CL	48	24	2	X
c5d.18xlarge	X	144.00	Intel Xeon Platinum 8124M	72	36	2	X
c5d.24xlarge	X	192.00	2nd Gen Intel Xeon Platinum 8275CL	96	48	2	X
c5d.metal	X	192.00	2nd Gen Intel Xeon Platinum 8275CL	96	48	2	X
<b>C5n</b>							
c5n.large	X	5.25	Intel Xeon Platinum 8124M	2	1	2	X
c5n.xlarge	X	10.50	Intel Xeon Platinum 8124M	4	2	2	X
c5n.2xlarge	X	21.00	Intel Xeon Platinum 8124M	8	4	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c5n.4xlarge	X	42.00	Intel Xeon Platinum 8124M	16	8	2	X
c5n.9xlarge	X	96.00	Intel Xeon Platinum 8124M	36	18	2	X
c5n.18xlarge	X	192.00	Intel Xeon Platinum 8124M	72	36	2	X
c5n.metal	X	192.00	Intel Xeon Platinum 8124M	72	36	2	X
<b>C6a</b>							
c6a.large	X	4.00	AMD EPYC 7R13	2	1	2	X
c6a.xlarge	X	8.00	AMD EPYC 7R13	4	2	2	X
c6a.2xlarge	X	16.00	AMD EPYC 7R13	8	4	2	X
c6a.4xlarge	X	32.00	AMD EPYC 7R13	16	8	2	X
c6a.8xlarge	X	64.00	AMD EPYC 7R13	32	16	2	X
c6a.12xlarge	X	96.00	AMD EPYC 7R13	48	24	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c6a.16xlarge	X	128.00	AMD EPYC 7R13	64	32	2	X
c6a.24xlarge	X	192.00	AMD EPYC 7R13	96	48	2	X
c6a.32xlarge	X	256.00	AMD EPYC 7R13	128	64	2	X
c6a.48xlarge	X	384.00	AMD EPYC 7R13	192	96	2	X
c6a.metal	X	384.00	AMD EPYC 7R13	192	96	2	X
<b>C6g</b>							
c6g.medium	X	2.00	Amazon Graviton2 Processor	1	1	1	X
c6g.large	X	4.00	Amazon Graviton2 Processor	2	2	1	X
c6g.xlarge	X	8.00	Amazon Graviton2 Processor	4	4	1	X
c6g.2xlarge	X	16.00	Amazon Graviton2 Processor	8	8	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c6g.4xlarge	X	32.00	Amazon Graviton2 Processor	16	16	1	X
c6g.8xlarge	X	64.00	Amazon Graviton2 Processor	32	32	1	X
c6g.12xlarge	X	96.00	Amazon Graviton2 Processor	48	48	1	X
c6g.16xlarge	X	128.00	Amazon Graviton2 Processor	64	64	1	X
c6g.metal	X	128.00	Amazon Graviton2 Processor	64	64	1	X
<b>C6gd</b>							
c6gd.medium	X	2.00	Amazon Graviton2 Processor	1	1	1	X
c6gd.large	X	4.00	Amazon Graviton2 Processor	2	2	1	X
c6gd.xlarge	X	8.00	Amazon Graviton2 Processor	4	4	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c6gd.2xlarge	X	16.00	Amazon Graviton2 Processor	8	8	1	X
c6gd.4xlarge	X	32.00	Amazon Graviton2 Processor	16	16	1	X
c6gd.8xlarge	X	64.00	Amazon Graviton2 Processor	32	32	1	X
c6gd.12xlarge	X	96.00	Amazon Graviton2 Processor	48	48	1	X
c6gd.16xlarge	X	128.00	Amazon Graviton2 Processor	64	64	1	X
c6gd.metal	X	128.00	Amazon Graviton2 Processor	64	64	1	X
<b>C6gn</b>							
c6gn.medium	X	2.00	Amazon Graviton2 Processor	1	1	1	X
c6gn.large	X	4.00	Amazon Graviton2 Processor	2	2	1	X



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c6gn.xlarge	X	8.00	Amazon Graviton2 Processor	4	4	1	X
c6gn.2xlarge	X	16.00	Amazon Graviton2 Processor	8	8	1	X
c6gn.4xlarge	X	32.00	Amazon Graviton2 Processor	16	16	1	X
c6gn.8xlarge	X	64.00	Amazon Graviton2 Processor	32	32	1	X
c6gn.12xlarge	X	96.00	Amazon Graviton2 Processor	48	48	1	X
c6gn.16xlarge	X	128.00	Amazon Graviton2 Processor	64	64	1	X
<b>C6i</b>							
c6i.large	X	4.00	Intel Xeon Ice Lake	2	1	2	X
c6i.xlarge	X	8.00	Intel Xeon Ice Lake	4	2	2	X
c6i.2xlarge	X	16.00	Intel Xeon Ice Lake	8	4	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c6i.4xlarge	X	32.00	Intel Xeon Ice Lake	16	8	2	X
c6i.8xlarge	X	64.00	Intel Xeon Ice Lake	32	16	2	X
c6i.12xlarge	X	96.00	Intel Xeon Ice Lake	48	24	2	X
c6i.16xlarge	X	128.00	Intel Xeon Ice Lake	64	32	2	X
c6i.24xlarge	X	192.00	Intel Xeon Ice Lake	96	48	2	X
c6i.32xlarge	X	256.00	Intel Xeon Ice Lake	128	64	2	X
c6i.metal	X	256.00	Intel Xeon Ice Lake	128	64	2	X
<b>C6id</b>							
c6id.large	X	4.00	Intel Xeon Ice Lake	2	1	2	X
c6id.xlarge	X	8.00	Intel Xeon Ice Lake	4	2	2	X
c6id.2xlarge	X	16.00	Intel Xeon Ice Lake	8	4	2	X
c6id.4xlarge	X	32.00	Intel Xeon Ice Lake	16	8	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c6id.8xlarge	X	64.00	Intel Xeon Ice Lake	32	16	2	X
c6id.12xlarge	X	96.00	Intel Xeon Ice Lake	48	24	2	X
c6id.16xlarge	X	128.00	Intel Xeon Ice Lake	64	32	2	X
c6id.24xlarge	X	192.00	Intel Xeon Ice Lake	96	48	2	X
c6id.32xlarge	X	256.00	Intel Xeon Ice Lake	128	64	2	X
c6id.metal	X	256.00	Intel Xeon Ice Lake	128	64	2	X
<b>C6in</b>							
c6in.large	X	4.00	Intel Xeon Ice Lake	2	1	2	X
c6in.xlarge	X	8.00	Intel Xeon Ice Lake	4	2	2	X
c6in.2xlarge	X	16.00	Intel Xeon Ice Lake	8	4	2	X
c6in.4xlarge	X	32.00	Intel Xeon Ice Lake	16	8	2	X
c6in.8xlarge	X	64.00	Intel Xeon Ice Lake	32	16	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c6in.12xlarge	X	96.00	Intel Xeon Ice Lake	48	24	2	X
c6in.16xlarge	X	128.00	Intel Xeon Ice Lake	64	32	2	X
c6in.24xlarge	X	192.00	Intel Xeon Ice Lake	96	48	2	X
c6in.32xlarge	X	256.00	Intel Xeon Ice Lake	128	64	2	X
c6in.metal	X	256.00	Intel Xeon Ice Lake	128	64	2	X
<b>C7a</b>							
c7a.medium	X	2.00	AMD EPYC 9R14	1	1	1	X
c7a.large	X	4.00	AMD EPYC 9R14	2	2	1	X
c7a.xlarge	X	8.00	AMD EPYC 9R14	4	4	1	X
c7a.2xlarge	X	16.00	AMD EPYC 9R14	8	8	1	X
c7a.4xlarge	X	32.00	AMD EPYC 9R14	16	16	1	X
c7a.8xlarge	X	64.00	AMD EPYC 9R14	32	32	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c7a.12xlarge	X	96.00	AMD EPYC 9R14	48	48	1	X
c7a.16xlarge	X	128.00	AMD EPYC 9R14	64	64	1	X
c7a.24xlarge	X	192.00	AMD EPYC 9R14	96	96	1	X
c7a.32xlarge	X	256.00	AMD EPYC 9R14	128	128	1	X
c7a.48xlarge	X	384.00	AMD EPYC 9R14	192	192	1	X
c7a.metal-48xl	X	384.00	AMD EPYC 9R14	192	192	1	X
<b>C7g</b>							
c7g.medium	X	2.00	Amazon Graviton3 Processor	1	1	1	X
c7g.large	X	4.00	Amazon Graviton3 Processor	2	2	1	X
c7g.xlarge	X	8.00	Amazon Graviton3 Processor	4	4	1	X
c7g.2xlarge	X	16.00	Amazon Graviton3 Processor	8	8	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c7g.4xlarge	x	32.00	Amazon Graviton3 Processor	16	16	1	x
c7g.8xlarge	x	64.00	Amazon Graviton3 Processor	32	32	1	x
c7g.12xlarge	x	96.00	Amazon Graviton3 Processor	48	48	1	x
c7g.16xlarge	x	128.00	Amazon Graviton3 Processor	64	64	1	x
c7g.metal	x	128.00	Amazon Graviton3 Processor	64	64	1	x
<b>C7gd</b>							
c7gd.medium	x	2.00	Amazon Graviton3 Processor	1	1	1	x
c7gd.large	x	4.00	Amazon Graviton3 Processor	2	2	1	x
c7gd.xlarge	x	8.00	Amazon Graviton3 Processor	4	4	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c7gd.2xlarge	x	16.00	Amazon Graviton3 Processor	8	8	1	x
c7gd.4xlarge	x	32.00	Amazon Graviton3 Processor	16	16	1	x
c7gd.8xlarge	x	64.00	Amazon Graviton3 Processor	32	32	1	x
c7gd.12xlarge	x	96.00	Amazon Graviton3 Processor	48	48	1	x
c7gd.16xlarge	x	128.00	Amazon Graviton3 Processor	64	64	1	x
c7gd.metal	x	128.00	Amazon Graviton3 Processor	64	64	1	x
<b>C7gn</b>							
c7gn.medium	x	2.00	Amazon Graviton3E Processor	1	1	1	x
c7gn.large	x	4.00	Amazon Graviton3E Processor	2	2	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c7gn.xlarge	x	8.00	Amazon Graviton3E Processor	4	4	1	x
c7gn.2xlarge	x	16.00	Amazon Graviton3E Processor	8	8	1	x
c7gn.4xlarge	x	32.00	Amazon Graviton3E Processor	16	16	1	x
c7gn.8xlarge	x	64.00	Amazon Graviton3E Processor	32	32	1	x
c7gn.12xlarge	x	96.00	Amazon Graviton3E Processor	48	48	1	x
c7gn.16xlarge	x	128.00	Amazon Graviton3E Processor	64	64	1	x
c7gn.metal	x	128.00	Amazon Graviton3E Processor	64	64	1	x
<b>C7i</b>							
c7i.large	x	4.00	Intel Xeon Sapphire Rapids	2	1	2	x



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c7i.xlarge	x	8.00	Intel Xeon Sapphire Rapids	4	2	2	x
c7i.2xlarge	x	16.00	Intel Xeon Sapphire Rapids	8	4	2	x
c7i.4xlarge	x	32.00	Intel Xeon Sapphire Rapids	16	8	2	x
c7i.8xlarge	x	64.00	Intel Xeon Sapphire Rapids	32	16	2	x
c7i.12xlarge	x	96.00	Intel Xeon Sapphire Rapids	48	24	2	x
c7i.16xlarge	x	128.00	Intel Xeon Sapphire Rapids	64	32	2	x
c7i.24xlarge	x	192.00	Intel Xeon Sapphire Rapids	96	48	2	x
c7i.48xlarge	x	384.00	Intel Xeon Sapphire Rapids	192	96	2	x
c7i.metal-24xl	x	192.00	Intel Xeon Sapphire Rapids	96	48	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c7i.metal-48xl	x	384.00	Intel Xeon Sapphire Rapids	192	96	2	x

## Network specifications

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>C5</b>								
c5.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
c5.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
c5.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
c5.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
c5.9xlarge	12 Gigabit	x	✓	x	1	8	30	✓
c5.12xlarge	12 Gigabit	x	✓	x	1	8	30	✓
c5.18xlarge	25 Gigabit	x	✓	x	1	15	50	✓
c5.24xlarge	25 Gigabit	x	✓	x	1	15	50	✓
c5.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>C5a</b>								
c5a.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c5a.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
c5a.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
c5a.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
c5a.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
c5a.12xlarge	12 Gigabit	x	✓	x	1	8	30	✓
c5a.16xlarge	20 Gigabit	x	✓	x	1	15	50	✓
c5a.24xlarge	20 Gigabit	x	✓	x	1	15	50	✓
<b>C5ad</b>								
c5ad.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
c5ad.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
c5ad.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
c5ad.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
c5ad.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
c5ad.12xlarge	12 Gigabit	x	✓	x	1	8	30	✓
c5ad.16xlarge	20 Gigabit	x	✓	x	1	15	50	✓
c5ad.24xlarge	20 Gigabit	x	✓	x	1	15	50	✓
<b>C5d</b>								
c5d.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
c5d.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c5d.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
c5d.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
c5d.9xlarge	12 Gigabit	x	✓	x	1	8	30	✓
c5d.12xlarge	12 Gigabit	x	✓	x	1	8	30	✓
c5d.18xlarge	25 Gigabit	x	✓	x	1	15	50	✓
c5d.24xlarge	25 Gigabit	x	✓	x	1	15	50	✓
c5d.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>C5n</b>								
c5n.large <sup>1</sup>	3.0 / 25.0	x	✓	x	1	3	10	✓
c5n.xlarge <sup>1</sup>	5.0 / 25.0	x	✓	x	1	4	15	✓
c5n.2xlarge <sup>1</sup>	10.0 / 25.0	x	✓	x	1	4	15	✓
c5n.4xlarge <sup>1</sup>	15.0 / 25.0	x	✓	x	1	8	30	✓
c5n.9xlarge	50 Gigabit	✓	✓	x	1	8	30	✓
c5n.18xlarge	100 Gigabit	✓	✓	x	1	15	50	✓
c5n.metal	100 Gigabit	✓	✓	x	1	15	50	✓
<b>C6a</b>								
c6a.large <sup>1</sup>	0.781 / 12.5	x	✓	x	1	3	10	✓
c6a.xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
c6a.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c6a.4xlarge <sup>1</sup>	6.25 / 12.5	✗	✓	✗	1	8	30	✓
c6a.8xlarge	12.5 Gigabit	✗	✓	✗	1	8	30	✓
c6a.12xlarge	18.75 Gigabit	✗	✓	✗	1	8	30	✓
c6a.16xlarge	25 Gigabit	✗	✓	✗	1	15	50	✓
c6a.24xlarge	37.5 Gigabit	✗	✓	✗	1	15	50	✓
c6a.32xlarge	50 Gigabit	✗	✓	✗	1	15	50	✓
c6a.48xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
c6a.metal	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>C6g</b>								
c6g.medium <sup>1</sup>	0.5 / 10.0	✗	✓	✗	1	2	4	✓
c6g.large <sup>1</sup>	0.75 / 10.0	✗	✓	✗	1	3	10	✓
c6g.xlarge <sup>1</sup>	1.25 / 10.0	✗	✓	✗	1	4	15	✓
c6g.2xlarge <sup>1</sup>	2.5 / 10.0	✗	✓	✗	1	4	15	✓
c6g.4xlarge <sup>1</sup>	5.0 / 10.0	✗	✓	✗	1	8	30	✓
c6g.8xlarge	12 Gigabit	✗	✓	✗	1	8	30	✓
c6g.12xlarge	20 Gigabit	✗	✓	✗	1	8	30	✓
c6g.16xlarge	25 Gigabit	✗	✓	✗	1	15	50	✓
c6g.metal	25 Gigabit	✗	✓	✗	1	15	50	✓
<b>C6gd</b>								

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c6gd.medium <sup>1</sup>	0.5 / 10.0	x	✓	x	1	2	4	✓
c6gd.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
c6gd.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
c6gd.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
c6gd.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
c6gd.8xlarge	12 Gigabit	x	✓	x	1	8	30	✓
c6gd.12xlarge	20 Gigabit	x	✓	x	1	8	30	✓
c6gd.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
c6gd.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>C6gn</b>								
c6gn.medium <sup>1</sup>	1.6 / 16.0	x	✓	x	1	2	4	✓
c6gn.large <sup>1</sup>	3.0 / 25.0	x	✓	x	1	3	10	✓
c6gn.xlarge <sup>1</sup>	6.3 / 25.0	x	✓	x	1	4	15	✓
c6gn.2xlarge <sup>1</sup>	12.5 / 25.0	x	✓	x	1	4	15	✓
c6gn.4xlarge	25 Gigabit	x	✓	x	1	8	30	✓
c6gn.8xlarge	50 Gigabit	x	✓	x	1	8	30	✓
c6gn.12xlarge	75 Gigabit	x	✓	x	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c6gn.16xlarge	100 Gigabit	✓	✓	✓	1	15	50	✓
<b>C6i</b>								
c6i.large <sup>1</sup>	0.781 / 12.5	x	✓	x	1	3	10	✓
c6i.xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
c6i.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓
c6i.4xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
c6i.8xlarge	12.5 Gigabit	x	✓	✓	1	8	30	✓
c6i.12xlarge	18.75 Gigabit	x	✓	✓	1	8	30	✓
c6i.16xlarge	25 Gigabit	x	✓	✓	1	15	50	✓
c6i.24xlarge	37.5 Gigabit	x	✓	✓	1	15	50	✓
c6i.32xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
c6i.metal	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>C6id</b>								
c6id.large <sup>1</sup>	0.781 / 12.5	x	✓	x	1	3	10	✓
c6id.xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
c6id.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓
c6id.4xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
c6id.8xlarge	12.5 Gigabit	x	✓	✓	1	8	30	✓
c6id.12xlarge	18.75 Gigabit	x	✓	✓	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c6id.16xlarge	25 Gigabit	✗	✓	✓	1	15	50	✓
c6id.24xlarge	37.5 Gigabit	✗	✓	✓	1	15	50	✓
c6id.32xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
c6id.metal	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>C6in</b>								
c6in.large <sup>1</sup>	3.125 / 25.0	✗	✓	✗	1	3	10	✓
c6in.xlarge <sup>1</sup>	6.25 / 30.0	✗	✓	✗	1	4	15	✓
c6in.2xlarge <sup>1</sup>	12.5 / 40.0	✗	✓	✗	1	4	15	✓
c6in.4xlarge <sup>1</sup>	25.0 / 50.0	✗	✓	✗	1	8	30	✓
c6in.8xlarge	50 Gigabit	✗	✓	✗	1	8	30	✓
c6in.12xlarge	75 Gigabit	✗	✓	✗	1	8	30	✓
c6in.16xlarge	100 Gigabit	✗	✓	✗	1	15	50	✓
c6in.24xlarge	150 Gigabit	✗	✓	✗	1	15	50	✓
c6in.32xlarge	200 Gigabit	✓	✓	✗	2	16	50	✓
c6in.metal	200 Gigabit	✓	✓	✗	2	16	50	✓
<b>C7a</b>								
c7a.medium <sup>1</sup>	0.39 / 12.5	✗	✓	✗	1	2	4	✓
c7a.large <sup>1</sup>	0.781 / 12.5	✗	✓	✗	1	3	10	✓
c7a.xlarge <sup>1</sup>	1.562 / 12.5	✗	✓	✗	1	4	15	✓



Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c7a.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓
c7a.4xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
c7a.8xlarge	12.5 Gigabit	x	✓	x	1	8	30	✓
c7a.12xlarge	18.75 Gigabit	x	✓	x	1	8	30	✓
c7a.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
c7a.24xlarge	37.5 Gigabit	x	✓	x	1	15	50	✓
c7a.32xlarge	50 Gigabit	x	✓	x	1	15	50	✓
c7a.48xlarge	50 Gigabit	✓	✓	x	1	15	50	✓
c7a.metal-48xl	50 Gigabit	✓	✓	x	1	15	50	✓
<b>C7g</b>								
c7g.medium <sup>1</sup>	0.52 / 12.5	x	✓	x	1	2	4	✓
c7g.large <sup>1</sup>	0.937 / 12.5	x	✓	x	1	3	10	✓
c7g.xlarge <sup>1</sup>	1.876 / 12.5	x	✓	x	1	4	15	✓
c7g.2xlarge <sup>1</sup>	3.75 / 15.0	x	✓	x	1	4	15	✓
c7g.4xlarge <sup>1</sup>	7.5 / 15.0	x	✓	x	1	8	30	✓
c7g.8xlarge	15 Gigabit	x	✓	x	1	8	30	✓
c7g.12xlarge	22.5 Gigabit	x	✓	✓	1	8	30	✓
c7g.16xlarge	30 Gigabit	✓	✓	✓	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c7g.metal	30 Gigabit	✓	✓	✓	1	15	50	✓
<b>C7gd</b>								
c7gd.medium <sup>1</sup>	0.52 / 12.5	x	✓	x	1	2	4	✓
c7gd.large <sup>1</sup>	0.937 / 12.5	x	✓	x	1	3	10	✓
c7gd.xlarge <sup>1</sup>	1.876 / 12.5	x	✓	x	1	4	15	✓
c7gd.2xlarge <sup>1</sup>	3.75 / 15.0	x	✓	x	1	4	15	✓
c7gd.4xlarge <sup>1</sup>	7.5 / 15.0	x	✓	x	1	8	30	✓
c7gd.8xlarge	15 Gigabit	x	✓	x	1	8	30	✓
c7gd.12xlarge	22.5 Gigabit	x	✓	✓	1	8	30	✓
c7gd.16xlarge	30 Gigabit	✓	✓	✓	1	15	50	✓
c7gd.metal	30 Gigabit	✓	✓	✓	1	15	50	✓
<b>C7gn</b>								
c7gn.medium <sup>1</sup>	3.125 / 25.0	x	✓	x	1	2	4	✓
c7gn.large <sup>1</sup>	6.25 / 30.0	x	✓	x	1	3	10	✓
c7gn.xlarge <sup>1</sup>	12.5 / 40.0	x	✓	x	1	4	15	✓
c7gn.2xlarge <sup>1</sup>	25.0 / 50.0	x	✓	x	1	4	15	✓
c7gn.4xlarge	50 Gigabit	x	✓	x	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c7gn.8xlarge	100 Gigabit	x	✓	x	1	8	30	✓
c7gn.12xlarge	150 Gigabit	x	✓	x	1	8	30	✓
c7gn.16xlarge	200 Gigabit	✓	✓	x	1	15	50	✓
c7gn.metal	200 Gigabit	✓	✓	x	1	15	50	✓
<b>C7i</b>								
c7i.large <sup>1</sup>	0.781 / 12.5	x	✓	x	1	3	10	✓
c7i.xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
c7i.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓
c7i.4xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
c7i.8xlarge	12.5 Gigabit	x	✓	x	1	8	30	✓
c7i.12xlarge	18.75 Gigabit	x	✓	✓	1	8	30	✓
c7i.16xlarge	25 Gigabit	x	✓	✓	1	15	50	✓
c7i.24xlarge	37.5 Gigabit	x	✓	✓	1	15	50	✓
c7i.48xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
c7i.metal-24xl	37.5 Gigabit	x	✓	✓	1	15	50	✓
c7i.metal-48xl	50 Gigabit	✓	✓	✓	1	15	50	✓

**Note**

<sup>1</sup> These instances have a baseline bandwidth and can use a network I/O credit mechanism to burst beyond their baseline bandwidth on a best effort basis. Other instances types can sustain their maximum performance indefinitely. For more information, see [instance network bandwidth](#).

For 32xlarge and metal instance types that support 200 Gbps, at least 2 ENIs, each attached to a different network card, are required on the instance to achieve 200 Gbps throughput. Each ENI attached to a network card can achieve a max of 170 Gbps.

## Amazon EBS specifications

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>C5</b>					
c5.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	4000.00 / 20000.00	✓	default
c5.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 20000.00	✓	default
c5.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	10000.00 / 20000.00	✓	default
c5.4xlarge	4750.00	593.75	20000.00	✓	default
c5.9xlarge	9500.00	1187.50	40000.00	✓	default
c5.12xlarge	9500.00	1187.50	40000.00	✓	default
c5.18xlarge	19000.00	2375.00	80000.00	✓	default
c5.24xlarge	19000.00	2375.00	80000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c5.metal	19000.00	2375.00	80000.00	✓	default
<b>C5a</b>					
c5a.large <sup>1</sup>	200.00 / 3170.00	25.00 / 396.25	800.00 / 13300.00	✓	default
c5a.xlarge <sup>1</sup>	400.00 / 3170.00	50.00 / 396.25	1600.00 / 13300.00	✓	default
c5a.2xlarge <sup>1</sup>	800.00 / 3170.00	100.00 / 396.25	3200.00 / 13300.00	✓	default
c5a.4xlarge <sup>1</sup>	1580.00 / 3170.00	197.50 / 396.25	6600.00 / 13300.00	✓	default
c5a.8xlarge	3170.00	396.25	13300.00	✓	default
c5a.12xlarge	4750.00	593.75	20000.00	✓	default
c5a.16xlarge	6300.00	787.50	26700.00	✓	default
c5a.24xlarge	9500.00	1187.50	40000.00	✓	default
<b>C5ad</b>					
c5ad.large <sup>1</sup>	200.00 / 3170.00	25.00 / 396.25	800.00 / 13300.00	✓	default
c5ad.xlarge <sup>1</sup>	400.00 / 3170.00	50.00 / 396.25	1600.00 / 13300.00	✓	default
c5ad.2xlarge <sup>1</sup>	800.00 / 3170.00	100.00 / 396.25	3200.00 / 13300.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c5ad.4xlarge <sup>1</sup>	1580.00 / 3170.00	197.50 / 396.25	6600.00 / 13300.00	✓	default
c5ad.8xlarge	3170.00	396.25	13300.00	✓	default
c5ad.12xlarge	4750.00	593.75	20000.00	✓	default
c5ad.16xlarge	6300.00	787.50	26700.00	✓	default
c5ad.24xlarge	9500.00	1187.50	40000.00	✓	default

### C5d

c5d.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	4000.00 / 20000.00	✓	default
c5d.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 20000.00	✓	default
c5d.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	10000.00 / 20000.00	✓	default
c5d.4xlarge	4750.00	593.75	20000.00	✓	default
c5d.9xlarge	9500.00	1187.50	40000.00	✓	default
c5d.12xlarge	9500.00	1187.50	40000.00	✓	default
c5d.18xlarge	19000.00	2375.00	80000.00	✓	default
c5d.24xlarge	19000.00	2375.00	80000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c5d.metal	19000.00	2375.00	80000.00	✓	default

**C5n**

c5n.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	4000.00 / 20000.00	✓	default
c5n.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 20000.00	✓	default
c5n.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	10000.00 / 20000.00	✓	default
c5n.4xlarge	4750.00	593.75	20000.00	✓	default
c5n.9xlarge	9500.00	1187.50	40000.00	✓	default
c5n.18xlarge	19000.00	2375.00	80000.00	✓	default
c5n.metal	19000.00	2375.00	80000.00	✓	default

**C6a**

c6a.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
c6a.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
c6a.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
c6a.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c6a.8xlarge	10000.00	1250.00	40000.00	✓	default
c6a.12xlarge	15000.00	1875.00	60000.00	✓	default
c6a.16xlarge	20000.00	2500.00	80000.00	✓	default
c6a.24xlarge	30000.00	3750.00	120000.00	✓	default
c6a.32xlarge	40000.00	5000.00	160000.00	✓	default
c6a.48xlarge	40000.00	5000.00	240000.00	✓	default
c6a.metal	40000.00	5000.00	240000.00	✓	default
<b>C6g</b>					
c6g.medium <sup>1</sup>	315.00 / 4750.00	39.38 / 593.75	2500.00 / 20000.00	✓	default
c6g.large <sup>1</sup>	630.00 / 4750.00	78.75 / 593.75	3600.00 / 20000.00	✓	default
c6g.xlarge <sup>1</sup>	1188.00 / 4750.00	148.50 / 593.75	6000.00 / 20000.00	✓	default
c6g.2xlarge <sup>1</sup>	2375.00 / 4750.00	296.88 / 593.75	12000.00 / 20000.00	✓	default
c6g.4xlarge	4750.00	593.75	20000.00	✓	default
c6g.8xlarge	9500.00	1187.50	40000.00	✓	default
c6g.12xlarge	14250.00	1781.25	50000.00	✓	default
c6g.16xlarge	19000.00	2375.00	80000.00	✓	default



Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c6g.metal	19000.00	2375.00	80000.00	✓	default
<b>C6gd</b>					
c6gd.medium <sup>1</sup>	315.00 / 4750.00	39.38 / 593.75	2500.00 / 20000.00	✓	default
c6gd.large <sup>1</sup>	630.00 / 4750.00	78.75 / 593.75	3600.00 / 20000.00	✓	default
c6gd.xlarge <sup>1</sup>	1188.00 / 4750.00	148.50 / 593.75	6000.00 / 20000.00	✓	default
c6gd.2xlarge <sup>1</sup>	2375.00 / 4750.00	296.88 / 593.75	12000.00 / 20000.00	✓	default
c6gd.4xlarge	4750.00	593.75	20000.00	✓	default
c6gd.8xlarge	9500.00	1187.50	40000.00	✓	default
c6gd.12xlarge	14250.00	1781.25	50000.00	✓	default
c6gd.16xlarge	19000.00	2375.00	80000.00	✓	default
c6gd.metal	19000.00	2375.00	80000.00	✓	default
<b>C6gn</b>					
c6gn.medium <sup>1</sup>	760.00 / 9500.00	95.00 / 1187.50	2500.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c6gn.large <sup>1</sup>	1235.00 / 9500.00	154.38 / 1187.50	5000.00 / 40000.00	✓	default
c6gn.xlarge <sup>1</sup>	2375.00 / 9500.00	296.88 / 1187.50	10000.00 / 40000.00	✓	default
c6gn.2xlarge <sup>1</sup>	4750.00 / 9500.00	593.75 / 1187.50	20000.00 / 40000.00	✓	default
c6gn.4xlarge	9500.00	1187.50	40000.00	✓	default
c6gn.8xlarge	19000.00	2375.00	80000.00	✓	default
c6gn.12xlarge	28500.00	3562.50	120000.00	✓	default
c6gn.16xlarge	38000.00	4750.00	160000.00	✓	default
<b>C6i</b>					
c6i.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
c6i.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
c6i.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
c6i.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
c6i.8xlarge	10000.00	1250.00	40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c6i.12xlarge	15000.00	1875.00	60000.00	✓	default
c6i.16xlarge	20000.00	2500.00	80000.00	✓	default
c6i.24xlarge	30000.00	3750.00	120000.00	✓	default
c6i.32xlarge	40000.00	5000.00	160000.00	✓	default
c6i.metal	40000.00	5000.00	160000.00	✓	default
<b>C6id</b>					
c6id.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
c6id.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
c6id.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
c6id.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
c6id.8xlarge	10000.00	1250.00	40000.00	✓	default
c6id.12xlarge	15000.00	1875.00	60000.00	✓	default
c6id.16xlarge	20000.00	2500.00	80000.00	✓	default
c6id.24xlarge	30000.00	3750.00	120000.00	✓	default
c6id.32xlarge	40000.00	5000.00	160000.00	✓	default
c6id.metal	40000.00	5000.00	160000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>C6in</b>					
c6in.large <sup>1</sup>	1562.00 / 25000.00	195.31 / 3125.00	6250.00 / 100000.00	✓	default
c6in.xlarge <sup>1</sup>	3125.00 / 25000.00	390.62 / 3125.00	12500.00 / 100000.00	✓	default
c6in.2xlarge <sup>1</sup>	6250.00 / 25000.00	781.25 / 3125.00	25000.00 / 100000.00	✓	default
c6in.4xlarge <sup>1</sup>	12500.00 / 25000.00	1562.50 / 3125.00	50000.00 / 100000.00	✓	default
c6in.8xlarge	25000.00	3125.00	100000.00	✓	default
c6in.12xlarge	37500.00	4687.50	150000.00	✓	default
c6in.16xlarge	50000.00	6250.00	200000.00	✓	default
c6in.24xlarge	75000.00	9375.00	300000.00	✓	default
c6in.32xlarge	100000.00	12500.00	400000.00	✓	default
c6in.metal	100000.00	12500.00	400000.00	✓	default
<b>C7a</b>					
c7a.medium <sup>1</sup>	325.00 / 10000.00	40.62 / 1250.00	2500.00 / 40000.00	✓	default
c7a.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c7a.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
c7a.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
c7a.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
c7a.8xlarge	10000.00	1250.00	40000.00	✓	default
c7a.12xlarge	15000.00	1875.00	60000.00	✓	default
c7a.16xlarge	20000.00	2500.00	80000.00	✓	default
c7a.24xlarge	30000.00	3750.00	120000.00	✓	default
c7a.32xlarge	40000.00	5000.00	160000.00	✓	default
c7a.48xlarge	40000.00	5000.00	240000.00	✓	default
c7a.metal-48xl	40000.00	5000.00	240000.00	✓	default
<b>C7g</b>					
c7g.medium <sup>1</sup>	315.00 / 10000.00	39.38 / 1250.00	2500.00 / 40000.00	✓	default
c7g.large <sup>1</sup>	630.00 / 10000.00	78.75 / 1250.00	3600.00 / 40000.00	✓	default
c7g.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c7g.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
c7g.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
c7g.8xlarge	10000.00	1250.00	40000.00	✓	default
c7g.12xlarge	15000.00	1875.00	60000.00	✓	default
c7g.16xlarge	20000.00	2500.00	80000.00	✓	default
c7g.metal	20000.00	2500.00	80000.00	✓	default
<b>C7gd</b>					
c7gd.medium <sup>1</sup>	315.00 / 10000.00	39.38 / 1250.00	2500.00 / 40000.00	✓	default
c7gd.large <sup>1</sup>	630.00 / 10000.00	78.75 / 1250.00	3600.00 / 40000.00	✓	default
c7gd.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
c7gd.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
c7gd.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
c7gd.8xlarge	10000.00	1250.00	40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c7gd.12xlarge	15000.00	1875.00	60000.00	✓	default
c7gd.16xlarge	20000.00	2500.00	80000.00	✓	default
c7gd.metal	20000.00	2500.00	80000.00	✓	default
<b>C7gn</b>					
c7gn.medium <sup>1</sup>	521.00 / 10000.00	65.12 / 1250.00	2083.00 / 40000.00	✓	default
c7gn.large <sup>1</sup>	1042.00 / 10000.00	130.25 / 1250.00	4167.00 / 40000.00	✓	default
c7gn.xlarge <sup>1</sup>	2083.00 / 10000.00	260.38 / 1250.00	8333.00 / 40000.00	✓	default
c7gn.2xlarge <sup>1</sup>	4167.00 / 10000.00	520.88 / 1250.00	16667.00 / 40000.00	✓	default
c7gn.4xlarge <sup>1</sup>	8333.00 / 10000.00	1041.62 / 1250.00	33333.00 / 40000.00	✓	default
c7gn.8xlarge <sup>1</sup>	16667.00 / 20000.00	2083.38 / 2500.00	66667.00 / 80000.00	✓	default
c7gn.12xlarge <sup>1</sup>	25000.00 / 30000.00	3125.00 / 3750.00	100000.00 / 120000.00	✓	default
c7gn.16xlarge <sup>1</sup>	33333.00 / 40000.00	4166.62 / 5000.00	133333.00 / 160000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c7gn.metal <sup>1</sup>	33333.00 / 40000.00	4166.62 / 5000.00	133333.00 / 160000.00	✓	default
<b>C7i</b>					
c7i.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
c7i.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
c7i.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
c7i.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
c7i.8xlarge	10000.00	1250.00	40000.00	✓	default
c7i.12xlarge	15000.00	1875.00	60000.00	✓	default
c7i.16xlarge	20000.00	2500.00	80000.00	✓	default
c7i.24xlarge	30000.00	3750.00	120000.00	✓	default
c7i.48xlarge	40000.00	5000.00	240000.00	✓	default
c7i.metal-24xl	30000.00	3750.00	120000.00	✓	default
c7i.metal-48xl	40000.00	5000.00	240000.00	✓	default



**Note**

<sup>1</sup> These instances can support maximum performance for 30 minutes at least once every 24 hours, after which they revert to their baseline performance. Other instances can sustain the maximum performance indefinitely. If your workload requires sustained maximum performance for longer than 30 minutes, use one of these instances.

<sup>2</sup> default indicates that instances are enabled for EBS optimization by default.

supported indicates that instances can optionally be enabled for EBS optimization For more information, see [Amazon EBS-optimized instances](#).

**Instance store specifications**

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
<b>C5ad</b>					
c5ad.large	1 x 75 GB	NVMe SSD	16,283 / 7,105		✓
c5ad.xlarge	1 x 150 GB	NVMe SSD	32,566 / 14,211		✓
c5ad.2xlarge	1 x 300 GB	NVMe SSD	65,132 / 28,421		✓
c5ad.4xlarge	2 x 300 GB	NVMe SSD	130,262 / 56,842		✓
c5ad.8xlarge	2 x 600 GB	NVMe SSD	260,526 / 113,684		✓
c5ad.12xlarge	2 x 900 GB	NVMe SSD	412,500 / 180,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
c5ad.16xlarge	2 x 1200 GB	NVMe SSD	521,052 / 227,368		✓
c5ad.24xlarge	2 x 1900 GB	NVMe SSD	825,000 / 360,000		✓
<b>C5d</b>					
c5d.large	1 x 50 GB	NVMe SSD	20,000 / 9,000		✓
c5d.xlarge	1 x 100 GB	NVMe SSD	40,000 / 18,000		✓
c5d.2xlarge	1 x 200 GB	NVMe SSD	80,000 / 37,000		✓
c5d.4xlarge	1 x 400 GB	NVMe SSD	175,000 / 75,000		✓
c5d.9xlarge	1 x 900 GB	NVMe SSD	350,000 / 170,000		✓
c5d.12xlarge	2 x 900 GB	NVMe SSD	700,000 / 340,000		✓
c5d.18xlarge	2 x 900 GB	NVMe SSD	700,000 / 340,000		✓
c5d.24xlarge	4 x 900 GB	NVMe SSD	1,400,000 / 680,000		✓
c5d.metal	4 x 900 GB	NVMe SSD	1,400,000 / 680,000		✓
<b>C6gd</b>					

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
c6gd.medium	1 x 59 GB	NVMe SSD	13,438 / 5,625		✓
c6gd.large	1 x 118 GB	NVMe SSD	26,875 / 11,250		✓
c6gd.xlarge	1 x 237 GB	NVMe SSD	53,750 / 22,500		✓
c6gd.2xlarge	1 x 474 GB	NVMe SSD	107,500 / 45,000		✓
c6gd.4xlarge	1 x 950 GB	NVMe SSD	215,000 / 90,000		✓
c6gd.8xlarge	1 x 1900 GB	NVMe SSD	430,000 / 180,000		✓
c6gd.12xlarge	2 x 1425 GB	NVMe SSD	645,000 / 270,000		✓
c6gd.16xlarge	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
c6gd.metal	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
<b>C6id</b>					
c6id.large	1 x 118 GB	NVMe SSD	33,542 / 16,771		✓
c6id.xlarge	1 x 237 GB	NVMe SSD	67,083 / 33,542		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
c6id.2xlarge	1 x 474 GB	NVMe SSD	134,167 / 67,084		✓
c6id.4xlarge	1 x 950 GB	NVMe SSD	268,333 / 134,167		✓
c6id.8xlarge	1 x 1900 GB	NVMe SSD	536,666 / 268,334		✓
c6id.12xlarge	2 x 1425 GB	NVMe SSD	804,998 / 402,500		✓
c6id.16xlarge	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓
c6id.24xlarge	4 x 1425 GB	NVMe SSD	1,609,996 / 805,000		✓
c6id.32xlarge	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓
c6id.metal	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓
<b>C7gd</b>					
c7gd.medium	1 x 59 GB	NVMe SSD	16,771 / 8,385		✓
c7gd.large	1 x 118 GB	NVMe SSD	33,542 / 16,771		✓
c7gd.xlarge	1 x 237 GB	NVMe SSD	67,083 / 33,542		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
c7gd.2xlarge	1 x 474 GB	NVMe SSD	134,167 / 67,084		✓
c7gd.4xlarge	1 x 950 GB	NVMe SSD	268,333 / 134,167		✓
c7gd.8xlarge	1 x 1900 GB	NVMe SSD	536,666 / 268,334		✓
c7gd.12xlarge	2 x 1425 GB	NVMe SSD	804,998 / 402,500		✓
c7gd.16xlarge	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓
c7gd.metal	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓

<sup>1</sup> Volumes attached to certain instances suffer a first-write penalty unless initialized. For more information, see [Optimize disk performance for instance store volumes](#).

<sup>2</sup> For more information, see [Instance store volume TRIM support](#).

## Security specifications

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>C5</b>						
c5.large	✓	Instance store not	X	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
		supported				
c5.xlarge	✓	Instance store not supported	X	X	✓	✓
c5.2xlarge	✓	Instance store not supported	X	X	✓	✓
c5.4xlarge	✓	Instance store not supported	X	X	✓	✓
c5.9xlarge	✓	Instance store not supported	X	X	✓	✓
c5.12xlarge	✓	Instance store not supported	X	X	✓	✓
c5.18xlarge	✓	Instance store not supported	X	X	✓	✓
c5.24xlarge	✓	Instance store not supported	X	X	✓	✓
c5.metal	✓	Instance store not supported	X	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>C5a</b>						
c5a.large	✓	Instance store not supported	✓	x	✓	x
c5a.xlarge	✓	Instance store not supported	✓	x	✓	✓
c5a.2xlarge	✓	Instance store not supported	✓	x	✓	✓
c5a.4xlarge	✓	Instance store not supported	✓	x	✓	✓
c5a.8xlarge	✓	Instance store not supported	✓	x	✓	✓
c5a.12xlarge	✓	Instance store not supported	✓	x	✓	✓
c5a.16xlarge	✓	Instance store not supported	✓	x	✓	✓
c5a.24xlarge	✓	Instance store not supported	✓	x	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>C5ad</b>						
c5ad.large	✓	✓	✓	✗	✓	✗
c5ad.xlarge	✓	✓	✓	✗	✓	✓
c5ad.2xlarge	✓	✓	✓	✗	✓	✓
c5ad.4xlarge	✓	✓	✓	✗	✓	✓
c5ad.8xlarge	✓	✓	✓	✗	✓	✓
c5ad.12xlarge	✓	✓	✓	✗	✓	✓
c5ad.16xlarge	✓	✓	✓	✗	✓	✓
c5ad.24xlarge	✓	✓	✓	✗	✓	✓
<b>C5d</b>						
c5d.large	✓	✓	✗	✗	✓	✗
c5d.xlarge	✓	✓	✗	✗	✓	✓
c5d.2xlarge	✓	✓	✗	✗	✓	✓
c5d.4xlarge	✓	✓	✗	✗	✓	✓
c5d.9xlarge	✓	✓	✗	✗	✓	✓
c5d.12xlarge	✓	✓	✗	✗	✓	✓
c5d.18xlarge	✓	✓	✗	✗	✓	✓
c5d.24xlarge	✓	✓	✗	✗	✓	✓
c5d.metal	✓	✓	✗	✗	✗	✗



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>C5n</b>						
c5n.large	✓	Instance store not supported	✓	✗	✓	✗
c5n.xlarge	✓	Instance store not supported	✓	✗	✓	✓
c5n.2xlarge	✓	Instance store not supported	✓	✗	✓	✓
c5n.4xlarge	✓	Instance store not supported	✓	✗	✓	✓
c5n.9xlarge	✓	Instance store not supported	✓	✗	✓	✓
c5n.18xlarge	✓	Instance store not supported	✓	✗	✓	✓
c5n.metal	✓	Instance store not supported	✓	✗	✗	✗
<b>C6a</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c6a.large	✓	Instance store not supported	✓	✓	✓	✗
c6a.xlarge	✓	Instance store not supported	✓	✓	✓	✓
c6a.2xlarge	✓	Instance store not supported	✓	✓	✓	✓
c6a.4xlarge	✓	Instance store not supported	✓	✓	✓	✓
c6a.8xlarge	✓	Instance store not supported	✓	✓	✓	✓
c6a.12xlarge	✓	Instance store not supported	✓	✓	✓	✓
c6a.16xlarge	✓	Instance store not supported	✓	✓	✓	✓
c6a.24xlarge	✓	Instance store not supported	✓	✗	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c6a.32xlarge	✓	Instance store not supported	✓	X	✓	✓
c6a.48xlarge	✓	Instance store not supported	✓	X	✓	✓
c6a.metal	✓	Instance store not supported	✓	X	X	X
<b>C6g</b>						
c6g.medium	✓	Instance store not supported	X	X	X	X
c6g.large	✓	Instance store not supported	X	X	X	✓
c6g.xlarge	✓	Instance store not supported	X	X	X	✓
c6g.2xlarge	✓	Instance store not supported	X	X	X	✓
c6g.4xlarge	✓	Instance store not supported	X	X	X	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c6g.8xlarge	✓	Instance store not supported	X	X	X	✓
c6g.12xlarge	✓	Instance store not supported	X	X	X	✓
c6g.16xlarge	✓	Instance store not supported	X	X	X	✓
c6g.metal	✓	Instance store not supported	X	X	X	X
<b>C6gd</b>						
c6gd.medium	✓	✓	X	X	X	X
c6gd.large	✓	✓	X	X	X	✓
c6gd.xlarge	✓	✓	X	X	X	✓
c6gd.2xlarge	✓	✓	X	X	X	✓
c6gd.4xlarge	✓	✓	X	X	X	✓
c6gd.8xlarge	✓	✓	X	X	X	✓
c6gd.12xlarge	✓	✓	X	X	X	✓
c6gd.16xlarge	✓	✓	X	X	X	✓
c6gd.metal	✓	✓	X	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>C6gn</b>						
c6gn.medium	✓	Instance store not supported	✓	x	x	x
c6gn.large	✓	Instance store not supported	✓	x	x	✓
c6gn.xlarge	✓	Instance store not supported	✓	x	x	✓
c6gn.2xlarge	✓	Instance store not supported	✓	x	x	✓
c6gn.4xlarge	✓	Instance store not supported	✓	x	x	✓
c6gn.8xlarge	✓	Instance store not supported	✓	x	x	✓
c6gn.12xlarge	✓	Instance store not supported	✓	x	x	✓
c6gn.16xlarge	✓	Instance store not supported	✓	x	x	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>C6i</b>						
c6i.large	✓	Instance store not supported	✓	✗	✓	✗
c6i.xlarge	✓	Instance store not supported	✓	✗	✓	✓
c6i.2xlarge	✓	Instance store not supported	✓	✗	✓	✓
c6i.4xlarge	✓	Instance store not supported	✓	✗	✓	✓
c6i.8xlarge	✓	Instance store not supported	✓	✗	✓	✓
c6i.12xlarge	✓	Instance store not supported	✓	✗	✓	✓
c6i.16xlarge	✓	Instance store not supported	✓	✗	✓	✓
c6i.24xlarge	✓	Instance store not supported	✓	✗	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c6i.32xlarge	✓	Instance store not supported	✓	X	✓	✓
c6i.metal	✓	Instance store not supported	✓	X	X	X
<b>C6id</b>						
c6id.large	✓	✓	✓	X	✓	X
c6id.xlarge	✓	✓	✓	X	✓	✓
c6id.2xlarge	✓	✓	✓	X	✓	✓
c6id.4xlarge	✓	✓	✓	X	✓	✓
c6id.8xlarge	✓	✓	✓	X	✓	✓
c6id.12xlarge	✓	✓	✓	X	✓	✓
c6id.16xlarge	✓	✓	✓	X	✓	✓
c6id.24xlarge	✓	✓	✓	X	✓	✓
c6id.32xlarge	✓	✓	✓	X	✓	✓
c6id.metal	✓	✓	✓	X	X	X
<b>C6in</b>						
c6in.large	✓	Instance store not supported	✓	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c6in.xlarge	✓	Instance store not supported	✓	X	✓	✓
c6in.2xlarge	✓	Instance store not supported	✓	X	✓	✓
c6in.4xlarge	✓	Instance store not supported	✓	X	✓	✓
c6in.8xlarge	✓	Instance store not supported	✓	X	✓	✓
c6in.12xlarge	✓	Instance store not supported	✓	X	✓	✓
c6in.16xlarge	✓	Instance store not supported	✓	X	✓	✓
c6in.24xlarge	✓	Instance store not supported	✓	X	✓	✓
c6in.32xlarge	✓	Instance store not supported	✓	X	✓	✓



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c6in.metal	✓	Instance store not supported	✓	X	X	X
<b>C7a</b>						
c7a.medium	✓	Instance store not supported	✓	X	✓	X
c7a.large	✓	Instance store not supported	✓	X	✓	X
c7a.xlarge	✓	Instance store not supported	✓	X	✓	X
c7a.2xlarge	✓	Instance store not supported	✓	X	✓	X
c7a.4xlarge	✓	Instance store not supported	✓	X	✓	X
c7a.8xlarge	✓	Instance store not supported	✓	X	✓	X
c7a.12xlarge	✓	Instance store not supported	✓	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c7a.16xlarge	✓	Instance store not supported	✓	X	✓	X
c7a.24xlarge	✓	Instance store not supported	✓	X	✓	X
c7a.32xlarge	✓	Instance store not supported	✓	X	✓	X
c7a.48xlarge	✓	Instance store not supported	✓	X	✓	X
c7a.metal-48xl	✓	Instance store not supported	✓	X	X	X
<b>C7g</b>						
c7g.medium	✓	Instance store not supported	✓	X	X	X
c7g.large	✓	Instance store not supported	✓	X	X	✓
c7g.xlarge	✓	Instance store not supported	✓	X	X	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c7g.2xlarge	✓	Instance store not supported	✓	X	X	✓
c7g.4xlarge	✓	Instance store not supported	✓	X	X	✓
c7g.8xlarge	✓	Instance store not supported	✓	X	X	✓
c7g.12xlarge	✓	Instance store not supported	✓	X	X	✓
c7g.16xlarge	✓	Instance store not supported	✓	X	X	✓
c7g.metal	✓	Instance store not supported	✓	X	X	X
<b>C7gd</b>						
c7gd.medium	✓	✓	✓	X	X	X
c7gd.large	✓	✓	✓	X	X	X
c7gd.xlarge	✓	✓	✓	X	X	X
c7gd.2xlarge	✓	✓	✓	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c7gd.4xlarge	✓	✓	✓	X	X	X
c7gd.8xlarge	✓	✓	✓	X	X	X
c7gd.12xlarge	✓	✓	✓	X	X	X
c7gd.16xlarge	✓	✓	✓	X	X	X
c7gd.metal	✓	✓	✓	X	X	X
<b>C7gn</b>						
c7gn.medium	✓	Instance store not supported	✓	X	X	X
c7gn.large	✓	Instance store not supported	✓	X	X	X
c7gn.xlarge	✓	Instance store not supported	✓	X	X	X
c7gn.2xlarge	✓	Instance store not supported	✓	X	X	X
c7gn.4xlarge	✓	Instance store not supported	✓	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c7gn.8xlarge	✓	Instance store not supported	✓	X	X	X
c7gn.12xlarge	✓	Instance store not supported	✓	X	X	X
c7gn.16xlarge	✓	Instance store not supported	✓	X	X	X
c7gn.metal	✓	Instance store not supported	✓	X	X	X
<b>C7i</b>						
c7i.large	✓	Instance store not supported	✓	X	✓	X
c7i.xlarge	✓	Instance store not supported	✓	X	✓	X
c7i.2xlarge	✓	Instance store not supported	✓	X	✓	X
c7i.4xlarge	✓	Instance store not supported	✓	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c7i.8xlarge	✓	Instance store not supported	✓	X	✓	X
c7i.12xlarge	✓	Instance store not supported	✓	X	✓	X
c7i.16xlarge	✓	Instance store not supported	✓	X	✓	X
c7i.24xlarge	✓	Instance store not supported	✓	X	✓	X
c7i.48xlarge	✓	Instance store not supported	✓	X	✓	X
c7i.metal-24xl	✓	Instance store not supported	✓	X	X	X
c7i.metal-48xl	✓	Instance store not supported	✓	X	X	X

## Memory optimized instances

Memory optimized instances are designed to deliver fast performance for workloads that process large data sets in memory.

## Contents

- [Available sizes](#)
- [Platform summary](#)
- [Performance specifications](#)
- [Network specifications](#)
- [Amazon EBS specifications](#)
- [Instance store specifications](#)
- [Security specifications](#)

## Available sizes

Instance type	Available sizes
R5	r5.large   r5.xlarge   r5.2xlarge   r5.4xlarge   r5.8xlarge   r5.12xlarge   r5.16xlarge   r5.24xlarge   r5.metal
R5a	r5a.large   r5a.xlarge   r5a.2xlarge   r5a.4xlarge   r5a.8xlarge   r5a.12xlarge   r5a.16xlarge   r5a.24xlarge
R5ad	r5ad.large   r5ad.xlarge   r5ad.2xlarge   r5ad.4xlarge   r5ad.8xlarge   r5ad.12xlarge   r5ad.16xlarge   r5ad.24xlarge
R5b	r5b.large   r5b.xlarge   r5b.2xlarge   r5b.4xlarge   r5b.8xlarge   r5b.12xlarge   r5b.16xlarge   r5b.24xlarge   r5b.metal
R5d	r5d.large   r5d.xlarge   r5d.2xlarge   r5d.4xlarge   r5d.8xlarge   r5d.12xlarge   r5d.16xlarge   r5d.24xlarge   r5d.metal
R5dn	r5dn.large   r5dn.xlarge   r5dn.2xlarge   r5dn.4xlarge   r5dn.8xlarge   r5dn.12xlarge   r5dn.16xlarge   r5dn.24xlarge   r5dn.metal
R5n	r5n.large   r5n.xlarge   r5n.2xlarge   r5n.4xlarge   r5n.8xlarge   r5n.12xlarge   r5n.16xlarge   r5n.24xlarge   r5n.metal

Instance type	Available sizes
R6a	r6a.large   r6a.xlarge   r6a.2xlarge   r6a.4xlarge   r6a.8xlarge   r6a.12xlarge   r6a.16xlarge   r6a.24xlarge   r6a.32xlarge   r6a.48xlarge   r6a.metal
R6g	r6g.medium   r6g.large   r6g.xlarge   r6g.2xlarge   r6g.4xlarge   r6g.8xlarge   r6g.12xlarge   r6g.16xlarge   r6g.metal
R6gd	r6gd.medium   r6gd.large   r6gd.xlarge   r6gd.2xlarge   r6gd.4xlarge   r6gd.8xlarge   r6gd.12xlarge   r6gd.16xlarge   r6gd.metal
R6i	r6i.large   r6i.xlarge   r6i.2xlarge   r6i.4xlarge   r6i.8xlarge   r6i.12xlarge   r6i.16xlarge   r6i.24xlarge   r6i.32xlarge   r6i.metal
R6idn	r6idn.large   r6idn.xlarge   r6idn.2xlarge   r6idn.4xlarge   r6idn.8xlarge   r6idn.12xlarge   r6idn.16xlarge   r6idn.24xlarge   r6idn.32xlarge   r6idn.metal
R6in	r6in.large   r6in.xlarge   r6in.2xlarge   r6in.4xlarge   r6in.8xlarge   r6in.12xlarge   r6in.16xlarge   r6in.24xlarge   r6in.32xlarge   r6in.metal
R6id	r6id.large   r6id.xlarge   r6id.2xlarge   r6id.4xlarge   r6id.8xlarge   r6id.12xlarge   r6id.16xlarge   r6id.24xlarge   r6id.32xlarge   r6id.metal
R7a	r7a.medium   r7a.large   r7a.xlarge   r7a.2xlarge   r7a.4xlarge   r7a.8xlarge   r7a.12xlarge   r7a.16xlarge   r7a.24xlarge   r7a.32xlarge   r7a.48xlarge   r7a.metal-48xl
R7g	r7g.medium   r7g.large   r7g.xlarge   r7g.2xlarge   r7g.4xlarge   r7g.8xlarge   r7g.12xlarge   r7g.16xlarge   r7g.metal



Instance type	Available sizes
R7gd	r7gd.medium   r7gd.large   r7gd.xlarge   r7gd.2xlarge   r7gd.4xlarge   r7gd.8xlarge   r7gd.12xlarge   r7gd.16xlarge   r7gd.metal
R7i	r7i.large   r7i.xlarge   r7i.2xlarge   r7i.4xlarge   r7i.8xlarge   r7i.12xlarge   r7i.16xlarge   r7i.24xlarge   r7i.48xlarge   r7i.metal-24xl   r7i.metal-48xl
R7iz	r7iz.large   r7iz.xlarge   r7iz.2xlarge   r7iz.4xlarge   r7iz.8xlarge   r7iz.12xlarge   r7iz.16xlarge   r7iz.32xlarge   r7iz.metal-16xl   r7iz.metal-32xl
U-3tb1	u-3tb1.56xlarge
U-6tb1	u-6tb1.56xlarge   u-6tb1.112xlarge   u-6tb1.metal
U-9tb1	u-9tb1.112xlarge   u-9tb1.metal
U-12tb1	u-12tb1.112xlarge   u-12tb1.metal
U-18tb1	u-18tb1.112xlarge   u-18tb1.metal
U-24tb1	u-24tb1.112xlarge   u-24tb1.metal
X1	x1.16xlarge   x1.32xlarge
X2gd	x2gd.medium   x2gd.large   x2gd.xlarge   x2gd.2xlarge   x2gd.4xlarge   x2gd.8xlarge   x2gd.12xlarge   x2gd.16xlarge   x2gd.metal
X2idn	x2idn.16xlarge   x2idn.24xlarge   x2idn.32xlarge   x2idn.metal
X2iedn	x2iedn.xlarge   x2iedn.2xlarge   x2iedn.4xlarge   x2iedn.8xlarge   x2iedn.16xlarge   x2iedn.24xlarge   x2iedn.32xlarge   x2iedn.metal

Instance type	Available sizes
X2iezn	x2iezn.2xlarge   x2iezn.4xlarge   x2iezn.6xlarge   x2iezn.8xlarge   x2iezn.12xlarge   x2iezn.metal
X1e	x1e.xlarge   x1e.2xlarge   x1e.4xlarge   x1e.8xlarge   x1e.16xlarge   x1e.32xlarge
z1d	z1d.large   z1d.xlarge   z1d.2xlarge   z1d.3xlarge   z1d.6xlarge   z1d.12xlarge   z1d.metal

## Platform summary

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
R5	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
R5a	Nitro	AMD (x86_64)	✗	✗	✓	✓	Windows   Linux
R5ad	Nitro	AMD (x86_64)	✗	✗	✓	✓	Windows   Linux
R5b	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
R5d	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
R5dn	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
R5n	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
R6a	Nitro	AMD (x86_64)	✓	✓	✓	✗	Windows   Linux
R6g	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
R6gd	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
R6i	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
R6idn	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
R6in	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
R6id	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
R7a	Nitro	AMD (x86_64)	✓	✓	✓	✓	Windows   Linux
R7g	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
R7gd	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
R7i	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
R7iz	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
U-3tb1	Nitro	Intel (x86_64)	✗	✗	✗	✗	Windows   Linux
U-6tb1	Nitro	Intel (x86_64)	✓	✓	✗	✗	Windows   Linux
U-9tb1	Nitro	Intel (x86_64)	✓	✓	✗	✗	Windows   Linux
U-12tb1	Nitro	Intel (x86_64)	✓	✓	✗	✗	Windows   Linux
U-18tb1	Nitro	Intel (x86_64)	✓	✓	✗	✗	Windows   Linux
U-24tb1	Nitro	Intel (x86_64)	✓	✓	✗	✗	Windows   Linux
X1	Xen	Intel (x86_64)	✗	✓	✓	✗	Windows   Linux
X2gd	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
X2idn	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
X2iedn	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
X2iezn	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
X1e	Xen	Intel (x86_64)	✗	✓	✓	✗	Windows   Linux
z1d	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux

## Performance specifications

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>R5</b>							
r5.large	✗	16.00	Intel Xeon Platinum 8175	2	1	2	✗
r5.xlarge	✗	32.00	Intel Xeon Platinum 8175	4	2	2	✗
r5.2xlarge	✗	64.00	Intel Xeon Platinum 8175	8	4	2	✗

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r5.4xlarge	x	128.00	Intel Xeon Platinum 8175	16	8	2	x
r5.8xlarge	x	256.00	Intel Xeon Platinum 8175	32	16	2	x
r5.12xlarge	x	384.00	Intel Xeon Platinum 8175	48	24	2	x
r5.16xlarge	x	512.00	Intel Xeon Platinum 8175	64	32	2	x
r5.24xlarge	x	768.00	Intel Xeon Platinum 8175	96	48	2	x
r5.metal	x	768.00	Intel Xeon Platinum 8175	96	48	2	x
<b>R5a</b>							
r5a.large	x	16.00	AMD EPYC 7571	2	1	2	x
r5a.xlarge	x	32.00	AMD EPYC 7571	4	2	2	x
r5a.2xlarge	x	64.00	AMD EPYC 7571	8	4	2	x
r5a.4xlarge	x	128.00	AMD EPYC 7571	16	8	2	x
r5a.8xlarge	x	256.00	AMD EPYC 7571	32	16	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r5a.12xlarge	X	384.00	AMD EPYC 7571	48	24	2	X
r5a.16xlarge	X	512.00	AMD EPYC 7571	64	32	2	X
r5a.24xlarge	X	768.00	AMD EPYC 7571	96	48	2	X
<b>R5ad</b>							
r5ad.large	X	16.00	AMD EPYC 7571	2	1	2	X
r5ad.xlarge	X	32.00	AMD EPYC 7571	4	2	2	X
r5ad.2xlarge	X	64.00	AMD EPYC 7571	8	4	2	X
r5ad.4xlarge	X	128.00	AMD EPYC 7571	16	8	2	X
r5ad.8xlarge	X	256.00	AMD EPYC 7571	32	16	2	X
r5ad.12xlarge	X	384.00	AMD EPYC 7571	48	24	2	X
r5ad.16xlarge	X	512.00	AMD EPYC 7571	64	32	2	X
r5ad.24xlarge	X	768.00	AMD EPYC 7571	96	48	2	X
<b>R5b</b>							

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r5b.large	X	16.00	Intel Xeon Platinum 8259	2	1	2	X
r5b.xlarge	X	32.00	Intel Xeon Platinum 8259	4	2	2	X
r5b.2xlarge	X	64.00	Intel Xeon Platinum 8259	8	4	2	X
r5b.4xlarge	X	128.00	Intel Xeon Platinum 8259	16	8	2	X
r5b.8xlarge	X	256.00	Intel Xeon Platinum 8259	32	16	2	X
r5b.12xlarge	X	384.00	Intel Xeon Platinum 8259	48	24	2	X
r5b.16xlarge	X	512.00	Intel Xeon Platinum 8259	64	32	2	X
r5b.24xlarge	X	768.00	Intel Xeon Platinum 8259	96	48	2	X
r5b.metal	X	768.00	Intel Xeon Platinum 8259	96	48	2	X
<b>R5d</b>							
r5d.large	X	16.00	Intel Xeon Platinum 8175	2	1	2	X
r5d.xlarge	X	32.00	Intel Xeon Platinum 8175	4	2	2	X



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r5d.2xlarge	x	64.00	Intel Xeon Platinum 8175	8	4	2	x
r5d.4xlarge	x	128.00	Intel Xeon Platinum 8175	16	8	2	x
r5d.8xlarge	x	256.00	Intel Xeon Platinum 8175	32	16	2	x
r5d.12xlarge	x	384.00	Intel Xeon Platinum 8175	48	24	2	x
r5d.16xlarge	x	512.00	Intel Xeon Platinum 8175	64	32	2	x
r5d.24xlarge	x	768.00	Intel Xeon Platinum 8175	96	48	2	x
r5d.metal	x	768.00	Intel Xeon Platinum 8175	96	48	2	x
<b>R5dn</b>							
r5dn.large	x	16.00	Intel Xeon Platinum 8259	2	1	2	x
r5dn.xlarge	x	32.00	Intel Xeon Platinum 8259	4	2	2	x
r5dn.2xlarge	x	64.00	Intel Xeon Platinum 8259	8	4	2	x
r5dn.4xlarge	x	128.00	Intel Xeon Platinum 8259	16	8	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r5dn.8xlarge	X	256.00	Intel Xeon Platinum 8259	32	16	2	X
r5dn.12xlarge	X	384.00	Intel Xeon Platinum 8259	48	24	2	X
r5dn.16xlarge	X	512.00	Intel Xeon Platinum 8259	64	32	2	X
r5dn.24xlarge	X	768.00	Intel Xeon Platinum 8259	96	48	2	X
r5dn.metal	X	768.00	Intel Xeon Platinum 8259	96	48	2	X
<b>R5n</b>							
r5n.large	X	16.00	Intel Xeon Platinum 8259	2	1	2	X
r5n.xlarge	X	32.00	Intel Xeon Platinum 8259	4	2	2	X
r5n.2xlarge	X	64.00	Intel Xeon Platinum 8259	8	4	2	X
r5n.4xlarge	X	128.00	Intel Xeon Platinum 8259	16	8	2	X
r5n.8xlarge	X	256.00	Intel Xeon Platinum 8259	32	16	2	X
r5n.12xlarge	X	384.00	Intel Xeon Platinum 8259	48	24	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r5n.16xlarge	X	512.00	Intel Xeon Platinum 8259	64	32	2	X
r5n.24xlarge	X	768.00	Intel Xeon Platinum 8259	96	48	2	X
r5n.metal	X	768.00	Intel Xeon Platinum 8259	96	48	2	X
<b>R6a</b>							
r6a.large	X	16.00	AMD EPYC 7R13	2	1	2	X
r6a.xlarge	X	32.00	AMD EPYC 7R13	4	2	2	X
r6a.2xlarge	X	64.00	AMD EPYC 7R13	8	4	2	X
r6a.4xlarge	X	128.00	AMD EPYC 7R13	16	8	2	X
r6a.8xlarge	X	256.00	AMD EPYC 7R13	32	16	2	X
r6a.12xlarge	X	384.00	AMD EPYC 7R13	48	24	2	X
r6a.16xlarge	X	512.00	AMD EPYC 7R13	64	32	2	X
r6a.24xlarge	X	768.00	AMD EPYC 7R13	96	48	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r6a.32xlarge	X	1024.00	AMD EPYC 7R13	128	64	2	X
r6a.48xlarge	X	1536.00	AMD EPYC 7R13	192	96	2	X
r6a.metal	X	1536.00	AMD EPYC 7R13	192	96	2	X

### R6g

r6g.medium	X	8.00	Amazon Graviton2 Processor	1	1	1	X
r6g.large	X	16.00	Amazon Graviton2 Processor	2	2	1	X
r6g.xlarge	X	32.00	Amazon Graviton2 Processor	4	4	1	X
r6g.2xlarge	X	64.00	Amazon Graviton2 Processor	8	8	1	X
r6g.4xlarge	X	128.00	Amazon Graviton2 Processor	16	16	1	X
r6g.8xlarge	X	256.00	Amazon Graviton2 Processor	32	32	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r6g.12xlarge	X	384.00	Amazon Graviton2 Processor	48	48	1	X
r6g.16xlarge	X	512.00	Amazon Graviton2 Processor	64	64	1	X
r6g.metal	X	512.00	Amazon Graviton2 Processor	64	64	1	X
<b>R6gd</b>							
r6gd.medium	X	8.00	Amazon Graviton2 Processor	1	1	1	X
r6gd.large	X	16.00	Amazon Graviton2 Processor	2	2	1	X
r6gd.xlarge	X	32.00	Amazon Graviton2 Processor	4	4	1	X
r6gd.2xlarge	X	64.00	Amazon Graviton2 Processor	8	8	1	X
r6gd.4xlarge	X	128.00	Amazon Graviton2 Processor	16	16	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r6gd.8xlarge	X	256.00	Amazon Graviton2 Processor	32	32	1	X
r6gd.12xlarge	X	384.00	Amazon Graviton2 Processor	48	48	1	X
r6gd.16xlarge	X	512.00	Amazon Graviton2 Processor	64	64	1	X
r6gd.metal	X	512.00	Amazon Graviton2 Processor	64	64	1	X
<b>R6i</b>							
r6i.large	X	16.00	Intel Xeon Ice Lake	2	1	2	X
r6i.xlarge	X	32.00	Intel Xeon Ice Lake	4	2	2	X
r6i.2xlarge	X	64.00	Intel Xeon Ice Lake	8	4	2	X
r6i.4xlarge	X	128.00	Intel Xeon Ice Lake	16	8	2	X
r6i.8xlarge	X	256.00	Intel Xeon Ice Lake	32	16	2	X
r6i.12xlarge	X	384.00	Intel Xeon Ice Lake	48	24	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r6i.16xlarge	X	512.00	Intel Xeon Ice Lake	64	32	2	X
r6i.24xlarge	X	768.00	Intel Xeon Ice Lake	96	48	2	X
r6i.32xlarge	X	1024.00	Intel Xeon Ice Lake	128	64	2	X
r6i.metal	X	1024.00	Intel Xeon Ice Lake	128	64	2	X
<b>R6idn</b>							
r6idn.large	X	16.00	Intel Xeon Ice Lake	2	1	2	X
r6idn.xlarge	X	32.00	Intel Xeon Ice Lake	4	2	2	X
r6idn.2xlarge	X	64.00	Intel Xeon Ice Lake	8	4	2	X
r6idn.4xlarge	X	128.00	Intel Xeon Ice Lake	16	8	2	X
r6idn.8xlarge	X	256.00	Intel Xeon Ice Lake	32	16	2	X
r6idn.12xlarge	X	384.00	Intel Xeon Ice Lake	48	24	2	X
r6idn.16xlarge	X	512.00	Intel Xeon Ice Lake	64	32	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r6idn.24xlarge	X	768.00	Intel Xeon Ice Lake	96	48	2	X
r6idn.32xlarge	X	1024.00	Intel Xeon Ice Lake	128	64	2	X
r6idn.metal	X	1024.00	Intel Xeon Ice Lake	128	64	2	X

### R6in

r6in.large	X	16.00	Intel Xeon Ice Lake	2	1	2	X
r6in.xlarge	X	32.00	Intel Xeon Ice Lake	4	2	2	X
r6in.2xlarge	X	64.00	Intel Xeon Ice Lake	8	4	2	X
r6in.4xlarge	X	128.00	Intel Xeon Ice Lake	16	8	2	X
r6in.8xlarge	X	256.00	Intel Xeon Ice Lake	32	16	2	X
r6in.12xlarge	X	384.00	Intel Xeon Ice Lake	48	24	2	X
r6in.16xlarge	X	512.00	Intel Xeon Ice Lake	64	32	2	X
r6in.24xlarge	X	768.00	Intel Xeon Ice Lake	96	48	2	X



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r6in.32xlarge	X	1024.00	Intel Xeon Ice Lake	128	64	2	X
r6in.metal	X	1024.00	Intel Xeon Ice Lake	128	64	2	X
<b>R6id</b>							
r6id.large	X	16.00	Intel Xeon Ice Lake	2	1	2	X
r6id.xlarge	X	32.00	Intel Xeon Ice Lake	4	2	2	X
r6id.2xlarge	X	64.00	Intel Xeon Ice Lake	8	4	2	X
r6id.4xlarge	X	128.00	Intel Xeon Ice Lake	16	8	2	X
r6id.8xlarge	X	256.00	Intel Xeon Ice Lake	32	16	2	X
r6id.12xlarge	X	384.00	Intel Xeon Ice Lake	48	24	2	X
r6id.16xlarge	X	512.00	Intel Xeon Ice Lake	64	32	2	X
r6id.24xlarge	X	768.00	Intel Xeon Ice Lake	96	48	2	X
r6id.32xlarge	X	1024.00	Intel Xeon Ice Lake	128	64	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r6id.metal	X	1024.00	Intel Xeon Ice Lake	128	64	2	X

### R7a

r7a.medium	X	8.00	AMD EPYC 9R14	1	1	1	X
r7a.large	X	16.00	AMD EPYC 9R14	2	2	1	X
r7a.xlarge	X	32.00	AMD EPYC 9R14	4	4	1	X
r7a.2xlarge	X	64.00	AMD EPYC 9R14	8	8	1	X
r7a.4xlarge	X	128.00	AMD EPYC 9R14	16	16	1	X
r7a.8xlarge	X	256.00	AMD EPYC 9R14	32	32	1	X
r7a.12xlarge	X	384.00	AMD EPYC 9R14	48	48	1	X
r7a.16xlarge	X	512.00	AMD EPYC 9R14	64	64	1	X
r7a.24xlarge	X	768.00	AMD EPYC 9R14	96	96	1	X
r7a.32xlarge	X	1024.00	AMD EPYC 9R14	128	128	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r7a.48xlarge	x	1536.00	AMD EPYC 9R14	192	192	1	x
r7a.metal-48xl	x	1536.00	AMD EPYC 9R14	192	192	1	x
<b>R7g</b>							
r7g.medium	x	8.00	Amazon Graviton3 Processor	1	1	1	x
r7g.large	x	16.00	Amazon Graviton3 Processor	2	2	1	x
r7g.xlarge	x	32.00	Amazon Graviton3 Processor	4	4	1	x
r7g.2xlarge	x	64.00	Amazon Graviton3 Processor	8	8	1	x
r7g.4xlarge	x	128.00	Amazon Graviton3 Processor	16	16	1	x
r7g.8xlarge	x	256.00	Amazon Graviton3 Processor	32	32	1	x
r7g.12xlarge	x	384.00	Amazon Graviton3 Processor	48	48	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r7g.16xlarge	x	512.00	Amazon Graviton3 Processor	64	64	1	x
r7g.metal	x	512.00	Amazon Graviton3 Processor	64	64	1	x
<b>R7gd</b>							
r7gd.medium	x	8.00	Amazon Graviton3 Processor	1	1	1	x
r7gd.large	x	16.00	Amazon Graviton3 Processor	2	2	1	x
r7gd.xlarge	x	32.00	Amazon Graviton3 Processor	4	4	1	x
r7gd.2xlarge	x	64.00	Amazon Graviton3 Processor	8	8	1	x
r7gd.4xlarge	x	128.00	Amazon Graviton3 Processor	16	16	1	x
r7gd.8xlarge	x	256.00	Amazon Graviton3 Processor	32	32	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r7gd.12xlarge	x	384.00	Amazon Graviton3 Processor	48	48	1	x
r7gd.16xlarge	x	512.00	Amazon Graviton3 Processor	64	64	1	x
r7gd.metal	x	512.00	Amazon Graviton3 Processor	64	64	1	x
<b>R7i</b>							
r7i.large	x	16.00	Intel Xeon Sapphire Rapids	2	1	2	x
r7i.xlarge	x	32.00	Intel Xeon Sapphire Rapids	4	2	2	x
r7i.2xlarge	x	64.00	Intel Xeon Sapphire Rapids	8	4	2	x
r7i.4xlarge	x	128.00	Intel Xeon Sapphire Rapids	16	8	2	x
r7i.8xlarge	x	256.00	Intel Xeon Sapphire Rapids	32	16	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r7i.12xlarge	x	384.00	Intel Xeon Sapphire Rapids	48	24	2	x
r7i.16xlarge	x	512.00	Intel Xeon Sapphire Rapids	64	32	2	x
r7i.24xlarge	x	768.00	Intel Xeon Sapphire Rapids	96	48	2	x
r7i.48xlarge	x	1536.00	Intel Xeon Sapphire Rapids	192	96	2	x
r7i.metal-24xl	x	768.00	Intel Xeon Sapphire Rapids	96	48	2	x
r7i.metal-48xl	x	1536.00	Intel Xeon Sapphire Rapids	192	96	2	x
<b>R7iz</b>							
r7iz.large	x	16.00	Intel Xeon Sapphire Rapids	2	1	2	x
r7iz.xlarge	x	32.00	Intel Xeon Sapphire Rapids	4	2	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r7iz.2xlarge	x	64.00	Intel Xeon Sapphire Rapids	8	4	2	x
r7iz.4xlarge	x	128.00	Intel Xeon Sapphire Rapids	16	8	2	x
r7iz.8xlarge	x	256.00	Intel Xeon Sapphire Rapids	32	16	2	x
r7iz.12xlarge	x	384.00	Intel Xeon Sapphire Rapids	48	24	2	x
r7iz.16xlarge	x	512.00	Intel Xeon Sapphire Rapids	64	32	2	x
r7iz.32xlarge	x	1024.00	Intel Xeon Sapphire Rapids	128	64	2	x
r7iz.meta-l-16xl	x	512.00	Intel Xeon Sapphire Rapids	64	32	2	x
r7iz.meta-l-32xl	x	1024.00	Intel Xeon Sapphire Rapids	128	64	2	x

**U-3tb1**

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
u-3tb1.56xlarge	x	3072.00	Intel Xeon Platinum 8176M	224	112	2	x
<b>U-6tb1</b>							
u-6tb1.56xlarge	x	6144.00	Intel Xeon Platinum 8176M	224	224	1	x
u-6tb1.112xlarge	x	6144.00	Intel Xeon Platinum 8176M	448	224	2	x
u-6tb1.metal	x	6144.00	Intel Xeon Platinum 8176M	448	224	2	x
<b>U-9tb1</b>							
u-9tb1.112xlarge	x	9216.00	Intel Xeon Platinum 8176M	448	224	2	x
u-9tb1.metal	x	9216.00	Intel Xeon Platinum 8176M	448	224	2	x
<b>U-12tb1</b>							
u-12tb1.12xlarge	x	12288.00	Intel Xeon Platinum 8176M	448	224	2	x



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
u-12tb1.metal	x	12288.00	Intel Xeon Platinum 8176M	448	224	2	x
<b>U-18tb1</b>							
u-18tb1.12xlarge	x	18432.00	Intel Xeon Platinum 8280L	448	224	2	x
u-18tb1.metal	x	18432.00	Intel Xeon Platinum 8280L	448	224	2	x
<b>U-24tb1</b>							
u-24tb1.12xlarge	x	24576.00	Intel Xeon Platinum 8280L	448	224	2	x
u-24tb1.metal	x	24576.00	Intel Xeon Platinum 8280L	448	224	2	x
<b>X1</b>							
x1.16xlarge	x	976.00	Intel Xeon E7 8880 v3	64	32	2	x
x1.32xlarge	x	1952.00	Intel Xeon E7 8880 v3	128	64	2	x
<b>X2gd</b>							
x2gd.medium	x	16.00	Amazon Graviton2 Processor	1	1	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
x2gd.large	X	32.00	Amazon Graviton2 Processor	2	2	1	X
x2gd.xlarge	X	64.00	Amazon Graviton2 Processor	4	4	1	X
x2gd.2xlarge	X	128.00	Amazon Graviton2 Processor	8	8	1	X
x2gd.4xlarge	X	256.00	Amazon Graviton2 Processor	16	16	1	X
x2gd.8xlarge	X	512.00	Amazon Graviton2 Processor	32	32	1	X
x2gd.12xlarge	X	768.00	Amazon Graviton2 Processor	48	48	1	X
x2gd.16xlarge	X	1024.00	Amazon Graviton2 Processor	64	64	1	X
x2gd.metal	X	1024.00	Amazon Graviton2 Processor	64	64	1	X
<b>X2idn</b>							

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
x2idn.16xlarge	X	1024.00	Intel Xeon Ice Lake	64	32	2	X
x2idn.24xlarge	X	1536.00	Intel Xeon Ice Lake	96	48	2	X
x2idn.32xlarge	X	2048.00	Intel Xeon Ice Lake	128	64	2	X
x2idn.metal	X	2048.00	Intel Xeon Ice Lake	128	64	2	X
<b>X2iedn</b>							
x2iedn.xlarge	X	128.00	Intel Xeon Ice Lake	4	2	2	X
x2iedn.2xlarge	X	256.00	Intel Xeon Ice Lake	8	4	2	X
x2iedn.4xlarge	X	512.00	Intel Xeon Ice Lake	16	8	2	X
x2iedn.8xlarge	X	1024.00	Intel Xeon Ice Lake	32	16	2	X
x2iedn.16xlarge	X	2048.00	Intel Xeon Ice Lake	64	32	2	X
x2iedn.24xlarge	X	3072.00	Intel Xeon Ice Lake	96	48	2	X
x2iedn.32xlarge	X	4096.00	Intel Xeon Ice Lake	128	64	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
x2iedn.metal	X	4096.00	Intel Xeon Ice Lake	128	64	2	X
<b>X2iezn</b>							
x2iezn.2xlarge	X	256.00	Intel Xeon Platinum 8252	8	4	2	X
x2iezn.4xlarge	X	512.00	Intel Xeon Platinum 8252	16	8	2	X
x2iezn.6xlarge	X	768.00	Intel Xeon Platinum 8252	24	12	2	X
x2iezn.8xlarge	X	1024.00	Intel Xeon Platinum 8252	32	16	2	X
x2iezn.12xlarge	X	1536.00	Intel Xeon Platinum 8252	48	24	2	X
x2iezn.metal	X	1536.00	Intel Xeon Platinum 8252	48	24	2	X
<b>X1e</b>							
x1e.xlarge	X	122.00	Intel Haswell E7 8880v3	4	2	2	X
x1e.2xlarge	X	244.00	Intel Haswell E7 8880v3	8	4	2	X
x1e.4xlarge	X	488.00	Intel Haswell E7 8880v3	16	8	2	X
x1e.8xlarge	X	976.00	Intel Haswell E7 8880v3	32	16	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
x1e.16xlarge	X	1952.00	Intel Haswell E7 8880v3	64	32	2	X
x1e.32xlarge	X	3904.00	Intel Haswell E7 8880v3	128	64	2	X
<b>z1d</b>							
z1d.large	X	16.00	Intel Xeon Platinum 8151	2	1	2	X
z1d.xlarge	X	32.00	Intel Xeon Platinum 8151	4	2	2	X
z1d.2xlarge	X	64.00	Intel Xeon Platinum 8151	8	4	2	X
z1d.3xlarge	X	96.00	Intel Xeon Platinum 8151	12	6	2	X
z1d.6xlarge	X	192.00	Intel Xeon Platinum 8151	24	12	2	X
z1d.12xlarge	X	384.00	Intel Xeon Platinum 8151	48	24	2	X
z1d.metal	X	384.00	Intel Xeon Platinum 8151	48	24	2	X

## Network specifications

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>R5</b>								
r5.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
r5.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
r5.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
r5.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
r5.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
r5.12xlarge	12 Gigabit	x	✓	x	1	8	30	✓
r5.16xlarge	20 Gigabit	x	✓	x	1	15	50	✓
r5.24xlarge	25 Gigabit	x	✓	x	1	15	50	✓
r5.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>R5a</b>								
r5a.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
r5a.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
r5a.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
r5a.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
r5a.8xlarge <sup>1</sup>	7.5 / 10.0	x	✓	x	1	8	30	✓
r5a.12xlarge	10 Gigabit	x	✓	x	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r5a.16xlarge	12 Gigabit	x	✓	x	1	15	50	✓
r5a.24xlarge	20 Gigabit	x	✓	x	1	15	50	✓
<b>R5ad</b>								
r5ad.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
r5ad.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
r5ad.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
r5ad.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
r5ad.8xlarge <sup>1</sup>	7.5 / 10.0	x	✓	x	1	8	30	✓
r5ad.12xlarge	10 Gigabit	x	✓	x	1	8	30	✓
r5ad.16xlarge	12 Gigabit	x	✓	x	1	15	50	✓
r5ad.24xlarge	20 Gigabit	x	✓	x	1	15	50	✓
<b>R5b</b>								
r5b.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
r5b.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
r5b.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
r5b.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
r5b.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
r5b.12xlarge	12 Gigabit	x	✓	x	1	8	30	✓
r5b.16xlarge	20 Gigabit	x	✓	x	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r5b.24xlarge	25 Gigabit	x	✓	x	1	15	50	✓
r5b.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>R5d</b>								
r5d.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
r5d.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
r5d.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
r5d.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
r5d.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
r5d.12xlarge	12 Gigabit	x	✓	x	1	8	30	✓
r5d.16xlarge	20 Gigabit	x	✓	x	1	15	50	✓
r5d.24xlarge	25 Gigabit	x	✓	x	1	15	50	✓
r5d.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>R5dn</b>								
r5dn.large <sup>1</sup>	2.1 / 25.0	x	✓	x	1	3	10	✓
r5dn.xlarge <sup>1</sup>	4.1 / 25.0	x	✓	x	1	4	15	✓
r5dn.2xlarge <sup>1</sup>	8.125 / 25.0	x	✓	x	1	4	15	✓
r5dn.4xlarge <sup>1</sup>	16.25 / 25.0	x	✓	x	1	8	30	✓
r5dn.8xlarge	25 Gigabit	x	✓	x	1	8	30	✓
r5dn.12xlarge	50 Gigabit	x	✓	x	1	8	30	✓



Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r5dn.16xlarge	75 Gigabit	✗	✓	✗	1	15	50	✓
r5dn.24xlarge	100 Gigabit	✓	✓	✗	1	15	50	✓
r5dn.metal	100 Gigabit	✓	✓	✗	1	15	50	✓
<b>R5n</b>								
r5n.large <sup>1</sup>	2.1 / 25.0	✗	✓	✗	1	3	10	✓
r5n.xlarge <sup>1</sup>	4.1 / 25.0	✗	✓	✗	1	4	15	✓
r5n.2xlarge <sup>1</sup>	8.125 / 25.0	✗	✓	✗	1	4	15	✓
r5n.4xlarge <sup>1</sup>	16.25 / 25.0	✗	✓	✗	1	8	30	✓
r5n.8xlarge	25 Gigabit	✗	✓	✗	1	8	30	✓
r5n.12xlarge	50 Gigabit	✗	✓	✗	1	8	30	✓
r5n.16xlarge	75 Gigabit	✗	✓	✗	1	15	50	✓
r5n.24xlarge	100 Gigabit	✓	✓	✗	1	15	50	✓
r5n.metal	100 Gigabit	✓	✓	✗	1	15	50	✓
<b>R6a</b>								
r6a.large <sup>1</sup>	0.781 / 12.5	✗	✓	✗	1	3	10	✓
r6a.xlarge <sup>1</sup>	1.562 / 12.5	✗	✓	✗	1	4	15	✓
r6a.2xlarge <sup>1</sup>	3.125 / 12.5	✗	✓	✗	1	4	15	✓
r6a.4xlarge <sup>1</sup>	6.25 / 12.5	✗	✓	✗	1	8	30	✓
r6a.8xlarge	12.5 Gigabit	✗	✓	✗	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r6a.12xlarge	18.75 Gigabit	x	✓	x	1	8	30	✓
r6a.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
r6a.24xlarge	37.5 Gigabit	x	✓	x	1	15	50	✓
r6a.32xlarge	50 Gigabit	x	✓	x	1	15	50	✓
r6a.48xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
r6a.metal	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>R6g</b>								
r6g.medium <sup>1</sup>	0.5 / 10.0	x	✓	x	1	2	4	✓
r6g.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
r6g.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
r6g.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
r6g.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
r6g.8xlarge	12 Gigabit	x	✓	x	1	8	30	✓
r6g.12xlarge	20 Gigabit	x	✓	x	1	8	30	✓
r6g.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
r6g.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>R6gd</b>								
r6gd.medium <sup>1</sup>	0.5 / 10.0	x	✓	x	1	2	4	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r6gd.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
r6gd.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
r6gd.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
r6gd.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
r6gd.8xlarge	12 Gigabit	x	✓	x	1	8	30	✓
r6gd.12xlarge	20 Gigabit	x	✓	x	1	8	30	✓
r6gd.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
r6gd.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>R6i</b>								
r6i.large <sup>1</sup>	0.781 / 12.5	x	✓	x	1	3	10	✓
r6i.xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
r6i.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓
r6i.4xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
r6i.8xlarge	12.5 Gigabit	x	✓	✓	1	8	30	✓
r6i.12xlarge	18.75 Gigabit	x	✓	✓	1	8	30	✓
r6i.16xlarge	25 Gigabit	x	✓	✓	1	15	50	✓
r6i.24xlarge	37.5 Gigabit	x	✓	✓	1	15	50	✓
r6i.32xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
r6i.metal	50 Gigabit	✓	✓	✓	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>R6idn</b>								
r6idn.large <sup>1</sup>	3.125 / 25.0	x	✓	x	1	3	10	✓
r6idn.xlarge <sup>1</sup>	6.25 / 30.0	x	✓	x	1	4	15	✓
r6idn.2xlarge <sub>1</sub>	12.5 / 40.0	x	✓	x	1	4	15	✓
r6idn.4xlarge <sub>1</sub>	25.0 / 50.0	x	✓	x	1	8	30	✓
r6idn.8xlarge	50 Gigabit	x	✓	x	1	8	30	✓
r6idn.12xlarge	75 Gigabit	x	✓	x	1	8	30	✓
r6idn.16xlarge	100 Gigabit	x	✓	x	1	15	50	✓
r6idn.24xlarge	150 Gigabit	x	✓	x	1	15	50	✓
r6idn.32xlarge	200 Gigabit	✓	✓	x	2	16	50	✓
r6idn.metal	200 Gigabit	✓	✓	x	2	16	50	✓
<b>R6in</b>								
r6in.large <sup>1</sup>	3.125 / 25.0	x	✓	x	1	3	10	✓
r6in.xlarge <sup>1</sup>	6.25 / 30.0	x	✓	x	1	4	15	✓
r6in.2xlarge <sup>1</sup>	12.5 / 40.0	x	✓	x	1	4	15	✓
r6in.4xlarge <sup>1</sup>	25.0 / 50.0	x	✓	x	1	8	30	✓
r6in.8xlarge	50 Gigabit	x	✓	x	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r6in.12xlarge	75 Gigabit	x	✓	x	1	8	30	✓
r6in.16xlarge	100 Gigabit	x	✓	x	1	15	50	✓
r6in.24xlarge	150 Gigabit	x	✓	x	1	15	50	✓
r6in.32xlarge	200 Gigabit	✓	✓	x	2	16	50	✓
r6in.metal	200 Gigabit	✓	✓	x	2	16	50	✓
<b>R6id</b>								
r6id.large <sup>1</sup>	0.781 / 12.5	x	✓	x	1	3	10	✓
r6id.xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
r6id.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓
r6id.4xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
r6id.8xlarge	12.5 Gigabit	x	✓	✓	1	8	30	✓
r6id.12xlarge	18.75 Gigabit	x	✓	✓	1	8	30	✓
r6id.16xlarge	25 Gigabit	x	✓	✓	1	15	50	✓
r6id.24xlarge	37.5 Gigabit	x	✓	✓	1	15	50	✓
r6id.32xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
r6id.metal	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>R7a</b>								
r7a.medium <sup>1</sup>	0.39 / 12.5	x	✓	x	1	2	4	✓
r7a.large <sup>1</sup>	0.781 / 12.5	x	✓	x	1	3	10	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r7a.xlarge <sup>1</sup>	1.562 / 12.5	x	✓	x	1	4	15	✓
r7a.2xlarge <sup>1</sup>	3.125 / 12.5	x	✓	x	1	4	15	✓
r7a.4xlarge <sup>1</sup>	6.25 / 12.5	x	✓	x	1	8	30	✓
r7a.8xlarge	12.5 Gigabit	x	✓	x	1	8	30	✓
r7a.12xlarge	18.75 Gigabit	x	✓	x	1	8	30	✓
r7a.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
r7a.24xlarge	37.5 Gigabit	x	✓	x	1	15	50	✓
r7a.32xlarge	50 Gigabit	x	✓	x	1	15	50	✓
r7a.48xlarge	50 Gigabit	✓	✓	x	1	15	50	✓
r7a.metal-48xl	50 Gigabit	✓	✓	x	1	15	50	✓
<b>R7g</b>								
r7g.medium <sup>1</sup>	0.52 / 12.5	x	✓	x	1	2	4	✓
r7g.large <sup>1</sup>	0.937 / 12.5	x	✓	x	1	3	10	✓
r7g.xlarge <sup>1</sup>	1.876 / 12.5	x	✓	x	1	4	15	✓
r7g.2xlarge <sup>1</sup>	3.75 / 15.0	x	✓	x	1	4	15	✓
r7g.4xlarge <sup>1</sup>	7.5 / 15.0	x	✓	x	1	8	30	✓
r7g.8xlarge	15 Gigabit	x	✓	x	1	8	30	✓
r7g.12xlarge	22.5 Gigabit	x	✓	✓	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r7g.16xlarge	30 Gigabit	✓	✓	✓	1	15	50	✓
r7g.metal	30 Gigabit	✓	✓	✓	1	15	50	✓
<b>R7gd</b>								
r7gd.medium <sup>1</sup>	0.52 / 12.5	✗	✓	✗	1	2	4	✓
r7gd.large <sup>1</sup>	0.937 / 12.5	✗	✓	✗	1	3	10	✓
r7gd.xlarge <sup>1</sup>	1.876 / 12.5	✗	✓	✗	1	4	15	✓
r7gd.2xlarge <sup>1</sup>	3.75 / 15.0	✗	✓	✗	1	4	15	✓
r7gd.4xlarge <sup>1</sup>	7.5 / 15.0	✗	✓	✗	1	8	30	✓
r7gd.8xlarge	15 Gigabit	✗	✓	✗	1	8	30	✓
r7gd.12xlarge	22.5 Gigabit	✗	✓	✓	1	8	30	✓
r7gd.16xlarge	30 Gigabit	✓	✓	✓	1	15	50	✓
r7gd.metal	30 Gigabit	✓	✓	✓	1	15	50	✓
<b>R7i</b>								
r7i.large <sup>1</sup>	0.781 / 12.5	✗	✓	✗	1	3	10	✓
r7i.xlarge <sup>1</sup>	1.562 / 12.5	✗	✓	✗	1	4	15	✓
r7i.2xlarge <sup>1</sup>	3.125 / 12.5	✗	✓	✗	1	4	15	✓
r7i.4xlarge <sup>1</sup>	6.25 / 12.5	✗	✓	✗	1	8	30	✓
r7i.8xlarge	12.5 Gigabit	✗	✓	✗	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r7i.12xlarge	18.75 Gigabit	✗	✓	✓	1	8	30	✓
r7i.16xlarge	25 Gigabit	✗	✓	✓	1	15	50	✓
r7i.24xlarge	37.5 Gigabit	✗	✓	✓	1	15	50	✓
r7i.48xlarge	50 Gigabit	✓	✓	✓	1	15	50	✓
r7i.metal-24xl	37.5 Gigabit	✗	✓	✓	1	15	50	✓
r7i.metal-48xl	50 Gigabit	✓	✓	✓	1	15	50	✓
<b>R7iz</b>								
r7iz.large <sup>1</sup>	0.781 / 12.5	✗	✓	✗	1	3	10	✓
r7iz.xlarge <sup>1</sup>	1.562 / 12.5	✗	✓	✗	1	4	15	✓
r7iz.2xlarge <sup>1</sup>	3.125 / 12.5	✗	✓	✗	1	4	15	✓
r7iz.4xlarge <sup>1</sup>	6.25 / 12.5	✗	✓	✗	1	8	30	✓
r7iz.8xlarge	12.5 Gigabit	✗	✓	✗	1	8	30	✓
r7iz.12xlarge	25 Gigabit	✗	✓	✗	1	8	30	✓
r7iz.16xlarge	25 Gigabit	✗	✓	✗	1	15	50	✓
r7iz.32xlarge	50 Gigabit	✓	✓	✗	1	15	50	✓
r7iz.meta-l-16xl	25 Gigabit	✗	✓	✗	1	15	50	✓
r7iz.meta-l-32xl	50 Gigabit	✓	✓	✗	1	15	50	✓



Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>U-3tb1</b>								
u-3tb1.56xlarge	50 Gigabit	x	✓	x	1	8	30	✓
<b>U-6tb1</b>								
u-6tb1.56xlarge	100 Gigabit	x	✓	x	1	15	50	✓
u-6tb1.112xlarge	100 Gigabit	x	✓	x	1	15	50	✓
u-6tb1.metal	100	x	✓	x	1	5	30	✓
<b>U-9tb1</b>								
u-9tb1.112xlarge	100 Gigabit	x	✓	x	1	15	50	✓
u-9tb1.metal	100	x	✓	x	1	5	30	✓
<b>U-12tb1</b>								
u-12tb1.12xlarge	100 Gigabit	x	✓	x	1	15	50	✓
u-12tb1.metal	100	x	✓	x	1	5	30	✓
<b>U-18tb1</b>								
u-18tb1.12xlarge	100 Gigabit	x	✓	x	1	15	50	✓
u-18tb1.metal	100 Gigabit	x	✓	x	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>U-24tb1</b>								
u-24tb1.1 12xlarge	100 Gigabit	x	✓	x	1	15	50	✓
u-24tb1.metal	100 Gigabit	x	✓	x	1	15	50	✓
<b>X1</b>								
x1.16xlarge	10 Gigabit	x	✓	x	1	8	30	✓
x1.32xlarge	25 Gigabit	x	✓	x	1	8	30	✓
<b>X2gd</b>								
x2gd.medium <sup>1</sup>	0.5 / 10.0	x	✓	x	1	2	4	✓
x2gd.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
x2gd.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
x2gd.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
x2gd.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
x2gd.8xlarge	12 Gigabit	x	✓	x	1	8	30	✓
x2gd.12xlarge	20 Gigabit	x	✓	x	1	8	30	✓
x2gd.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
x2gd.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>X2idn</b>								

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
x2idn.16xlarge	50 Gigabit	X	✓	✓	1	15	50	✓
x2idn.24xlarge	75 Gigabit	X	✓	✓	1	15	50	✓
x2idn.32xlarge	100 Gigabit	✓	✓	✓	1	15	50	✓
x2idn.metal	100 Gigabit	✓	✓	✓	1	15	50	✓
<b>X2iedn</b>								
x2iedn.xlarge <sup>1</sup>	1.875 / 25.0	X	✓	X	1	4	15	✓
x2iedn.2xlarge <sup>1</sup>	5.0 / 25.0	X	✓	X	1	4	15	✓
x2iedn.4xlarge <sup>1</sup>	12.5 / 25.0	X	✓	X	1	8	30	✓
x2iedn.8xlarge	25 Gigabit	X	✓	✓	1	8	30	✓
x2iedn.16xlarge	50 Gigabit	X	✓	✓	1	15	50	✓
x2iedn.24xlarge	75 Gigabit	X	✓	✓	1	15	50	✓
x2iedn.32xlarge	100 Gigabit	✓	✓	✓	1	15	50	✓
x2iedn.metal	100 Gigabit	✓	✓	✓	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>X2iezn</b>								
x2iezn.2xlarge <sup>1</sup>	12.5 / 25.0	x	✓	x	1	4	15	✓
x2iezn.4xlarge <sup>1</sup>	15.0 / 25.0	x	✓	x	1	8	30	✓
x2iezn.6xlarge	50 Gigabit	x	✓	x	1	8	30	✓
x2iezn.8xlarge	75 Gigabit	x	✓	x	1	8	30	✓
x2iezn.12xlarge	100 Gigabit	✓	✓	x	1	15	50	✓
x2iezn.metal	100 Gigabit	✓	✓	x	1	15	50	✓
<b>X1e</b>								
x1e.xlarge <sup>1</sup>	0.625 / 10.0	x	✓	x	1	3	10	✓
x1e.2xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
x1e.4xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
x1e.8xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	4	15	✓
x1e.16xlarge	10 Gigabit	x	✓	x	1	8	30	✓
x1e.32xlarge	25 Gigabit	x	✓	x	1	8	30	✓
<b>z1d</b>								
z1d.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
z1d.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
z1d.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
z1d.3xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
z1d.6xlarge	12 Gigabit	x	✓	x	1	8	30	✓
z1d.12xlarge	25 Gigabit	x	✓	x	1	15	50	✓
z1d.metal	25 Gigabit	x	✓	x	1	15	50	✓

### Note

<sup>1</sup> These instances have a baseline bandwidth and can use a network I/O credit mechanism to burst beyond their baseline bandwidth on a best effort basis. Other instances types can sustain their maximum performance indefinitely. For more information, see [instance network bandwidth](#).

For 32xlarge and metal instance types that support 200 Gbps, at least 2 ENIs, each attached to a different network card, are required on the instance to achieve 200 Gbps throughput. Each ENI attached to a network card can achieve a max of 170 Gbps. u-6tb1.metal, u-9tb1.metal, and u-12tb1.metal instances launched after March 12, 2020 provide network performance of 100 Gbps. u-6tb1.metal, u-9tb1.metal, and u-12tb1.metal instances launched before March 12, 2020 might only provide network performance of 25 Gbps. To ensure that instances launched before March 12, 2020 have a network performance of 100 Gbps, contact your account team to upgrade your instance at no additional cost.

## Amazon EBS specifications

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>R5</b>					
r5.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	3600.00 / 18750.00	✓	default
r5.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 18750.00	✓	default
r5.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	12000.00 / 18750.00	✓	default
r5.4xlarge	4750.00	593.75	18750.00	✓	default
r5.8xlarge	6800.00	850.00	30000.00	✓	default
r5.12xlarge	9500.00	1187.50	40000.00	✓	default
r5.16xlarge	13600.00	1700.00	60000.00	✓	default
r5.24xlarge	19000.00	2375.00	80000.00	✓	default
r5.metal	19000.00	2375.00	80000.00	✓	default
<b>R5a</b>					
r5a.large <sup>1</sup>	650.00 / 2880.00	81.25 / 360.00	3600.00 / 16000.00	✓	default
r5a.xlarge <sup>1</sup>	1085.00 / 2880.00	135.62 / 360.00	6000.00 / 16000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r5a.2xlarge <sup>1</sup>	1580.00 / 2880.00	197.50 / 360.00	8333.00 / 16000.00	✓	default
r5a.4xlarge	2880.00	360.00	16000.00	✓	default
r5a.8xlarge	4750.00	593.75	20000.00	✓	default
r5a.12xlarge	6780.00	847.50	30000.00	✓	default
r5a.16xlarge	9500.00	1187.50	40000.00	✓	default
r5a.24xlarge	13570.00	1696.25	60000.00	✓	default
<b>R5ad</b>					
r5ad.large <sup>1</sup>	650.00 / 2880.00	81.25 / 360.00	3600.00 / 16000.00	✓	default
r5ad.xlarge <sup>1</sup>	1085.00 / 2880.00	135.62 / 360.00	6000.00 / 16000.00	✓	default
r5ad.2xlarge <sup>1</sup>	1580.00 / 2880.00	197.50 / 360.00	8333.00 / 16000.00	✓	default
r5ad.4xlarge	2880.00	360.00	16000.00	✓	default
r5ad.8xlarge	4750.00	593.75	20000.00	✓	default
r5ad.12xlarge	6780.00	847.50	30000.00	✓	default
r5ad.16xlarge	9500.00	1187.50	40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r5ad.24xlarge	13570.00	1696.25	60000.00	✓	default

**R5b**

r5b.large <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	5417.00 / 43333.00	✓	default
r5b.xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	10833.00 / 43333.00	✓	default
r5b.2xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	21667.00 / 43333.00	✓	default
r5b.4xlarge	10000.00	1250.00	43333.00	✓	default
r5b.8xlarge	20000.00	2500.00	86667.00	✓	default
r5b.12xlarge	30000.00	3750.00	130000.00	✓	default
r5b.16xlarge	40000.00	5000.00	173333.00	✓	default
r5b.24xlarge	60000.00	7500.00	260000.00	✓	default
r5b.metal	60000.00	7500.00	260000.00	✓	default

**R5d**

r5d.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	3600.00 / 18750.00	✓	default
r5d.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 18750.00	✓	default



Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r5d.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	12000.00 / 18750.00	✓	default
r5d.4xlarge	4750.00	593.75	18750.00	✓	default
r5d.8xlarge	6800.00	850.00	30000.00	✓	default
r5d.12xlarge	9500.00	1187.50	40000.00	✓	default
r5d.16xlarge	13600.00	1700.00	60000.00	✓	default
r5d.24xlarge	19000.00	2375.00	80000.00	✓	default
r5d.metal	19000.00	2375.00	80000.00	✓	default
<b>R5dn</b>					
r5dn.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	3600.00 / 18750.00	✓	default
r5dn.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 18750.00	✓	default
r5dn.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	12000.00 / 18750.00	✓	default
r5dn.4xlarge	4750.00	593.75	18750.00	✓	default
r5dn.8xlarge	6800.00	850.00	30000.00	✓	default
r5dn.12xlarge	9500.00	1187.50	40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r5dn.16xlarge	13600.00	1700.00	60000.00	✓	default
r5dn.24xlarge	19000.00	2375.00	80000.00	✓	default
r5dn.metal	19000.00	2375.00	80000.00	✓	default
<b>R5n</b>					
r5n.large <sup>1</sup>	650.00 / 4750.00	81.25 / 593.75	3600.00 / 18750.00	✓	default
r5n.xlarge <sup>1</sup>	1150.00 / 4750.00	143.75 / 593.75	6000.00 / 18750.00	✓	default
r5n.2xlarge <sup>1</sup>	2300.00 / 4750.00	287.50 / 593.75	12000.00 / 18750.00	✓	default
r5n.4xlarge	4750.00	593.75	18750.00	✓	default
r5n.8xlarge	6800.00	850.00	30000.00	✓	default
r5n.12xlarge	9500.00	1187.50	40000.00	✓	default
r5n.16xlarge	13600.00	1700.00	60000.00	✓	default
r5n.24xlarge	19000.00	2375.00	80000.00	✓	default
r5n.metal	19000.00	2375.00	80000.00	✓	default
<b>R6a</b>					

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r6a.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
r6a.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
r6a.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
r6a.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
r6a.8xlarge	10000.00	1250.00	40000.00	✓	default
r6a.12xlarge	15000.00	1875.00	60000.00	✓	default
r6a.16xlarge	20000.00	2500.00	80000.00	✓	default
r6a.24xlarge	30000.00	3750.00	120000.00	✓	default
r6a.32xlarge	40000.00	5000.00	160000.00	✓	default
r6a.48xlarge	40000.00	5000.00	240000.00	✓	default
r6a.metal	40000.00	5000.00	240000.00	✓	default
<b>R6g</b>					
r6g.medium <sup>1</sup>	315.00 / 4750.00	39.38 / 593.75	2500.00 / 20000.00	✓	default
r6g.large <sup>1</sup>	630.00 / 4750.00	78.75 / 593.75	3600.00 / 20000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r6g.xlarge <sup>1</sup>	1188.00 / 4750.00	148.50 / 593.75	6000.00 / 20000.00	✓	default
r6g.2xlarge <sup>1</sup>	2375.00 / 4750.00	296.88 / 593.75	12000.00 / 20000.00	✓	default
r6g.4xlarge	4750.00	593.75	20000.00	✓	default
r6g.8xlarge	9500.00	1187.50	40000.00	✓	default
r6g.12xlarge	14250.00	1781.25	50000.00	✓	default
r6g.16xlarge	19000.00	2375.00	80000.00	✓	default
r6g.metal	19000.00	2375.00	80000.00	✓	default
<b>R6gd</b>					
r6gd.medium <sup>1</sup>	315.00 / 4750.00	39.38 / 593.75	2500.00 / 20000.00	✓	default
r6gd.large <sup>1</sup>	630.00 / 4750.00	78.75 / 593.75	3600.00 / 20000.00	✓	default
r6gd.xlarge <sup>1</sup>	1188.00 / 4750.00	148.50 / 593.75	6000.00 / 20000.00	✓	default
r6gd.2xlarge <sup>1</sup>	2375.00 / 4750.00	296.88 / 593.75	12000.00 / 20000.00	✓	default
r6gd.4xlarge	4750.00	593.75	20000.00	✓	default
r6gd.8xlarge	9500.00	1187.50	40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r6gd.12xlarge	14250.00	1781.25	50000.00	✓	default
r6gd.16xlarge	19000.00	2375.00	80000.00	✓	default
r6gd.metal	19000.00	2375.00	80000.00	✓	default
<b>R6i</b>					
r6i.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
r6i.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
r6i.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
r6i.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
r6i.8xlarge	10000.00	1250.00	40000.00	✓	default
r6i.12xlarge	15000.00	1875.00	60000.00	✓	default
r6i.16xlarge	20000.00	2500.00	80000.00	✓	default
r6i.24xlarge	30000.00	3750.00	120000.00	✓	default
r6i.32xlarge	40000.00	5000.00	160000.00	✓	default
r6i.metal	40000.00	5000.00	160000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>R6idn</b>					
r6idn.large <sup>1</sup>	1562.00 / 25000.00	195.31 / 3125.00	6250.00 / 100000.00	✓	default
r6idn.xlarge <sup>1</sup>	3125.00 / 25000.00	390.62 / 3125.00	12500.00 / 100000.00	✓	default
r6idn.2xlarge <sup>1</sup>	6250.00 / 25000.00	781.25 / 3125.00	25000.00 / 100000.00	✓	default
r6idn.4xlarge <sup>1</sup>	12500.00 / 25000.00	1562.50 / 3125.00	50000.00 / 100000.00	✓	default
r6idn.8xlarge	25000.00	3125.00	100000.00	✓	default
r6idn.12xlarge	37500.00	4687.50	150000.00	✓	default
r6idn.16xlarge	50000.00	6250.00	200000.00	✓	default
r6idn.24xlarge	75000.00	9375.00	300000.00	✓	default
r6idn.32xlarge	100000.00	12500.00	400000.00	✓	default
r6idn.metal	100000.00	12500.00	400000.00	✓	default
<b>R6in</b>					
r6in.large <sup>1</sup>	1562.00 / 25000.00	195.31 / 3125.00	6250.00 / 100000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r6in.xlarge <sup>1</sup>	3125.00 / 25000.00	390.62 / 3125.00	12500.00 / 100000.00	✓	default
r6in.2xlarge <sup>1</sup>	6250.00 / 25000.00	781.25 / 3125.00	25000.00 / 100000.00	✓	default
r6in.4xlarge <sup>1</sup>	12500.00 / 25000.00	1562.50 / 3125.00	50000.00 / 100000.00	✓	default
r6in.8xlarge	25000.00	3125.00	100000.00	✓	default
r6in.12xlarge	37500.00	4687.50	150000.00	✓	default
r6in.16xlarge	50000.00	6250.00	200000.00	✓	default
r6in.24xlarge	75000.00	9375.00	300000.00	✓	default
r6in.32xlarge	100000.00	12500.00	400000.00	✓	default
r6in.metal	100000.00	12500.00	400000.00	✓	default
<b>R6id</b>					
r6id.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
r6id.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
r6id.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
r6id.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r6id.8xlarge	10000.00	1250.00	40000.00	✓	default
r6id.12xlarge	15000.00	1875.00	60000.00	✓	default
r6id.16xlarge	20000.00	2500.00	80000.00	✓	default
r6id.24xlarge	30000.00	3750.00	120000.00	✓	default
r6id.32xlarge	40000.00	5000.00	160000.00	✓	default
r6id.metal	40000.00	5000.00	160000.00	✓	default
<b>R7a</b>					
r7a.medium <sup>1</sup>	325.00 / 10000.00	40.62 / 1250.00	2500.00 / 40000.00	✓	default
r7a.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
r7a.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
r7a.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
r7a.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
r7a.8xlarge	10000.00	1250.00	40000.00	✓	default
r7a.12xlarge	15000.00	1875.00	60000.00	✓	default
r7a.16xlarge	20000.00	2500.00	80000.00	✓	default



Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r7a.24xlarge	30000.00	3750.00	120000.00	✓	default
r7a.32xlarge	40000.00	5000.00	160000.00	✓	default
r7a.48xlarge	40000.00	5000.00	240000.00	✓	default
r7a.metal-48xl	40000.00	5000.00	240000.00	✓	default
<b>R7g</b>					
r7g.medium <sup>1</sup>	315.00 / 10000.00	39.38 / 1250.00	2500.00 / 40000.00	✓	default
r7g.large <sup>1</sup>	630.00 / 10000.00	78.75 / 1250.00	3600.00 / 40000.00	✓	default
r7g.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
r7g.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
r7g.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
r7g.8xlarge	10000.00	1250.00	40000.00	✓	default
r7g.12xlarge	15000.00	1875.00	60000.00	✓	default
r7g.16xlarge	20000.00	2500.00	80000.00	✓	default
r7g.metal	20000.00	2500.00	80000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>R7gd</b>					
r7gd.medium <sup>1</sup>	315.00 / 10000.00	39.38 / 1250.00	2500.00 / 40000.00	✓	default
r7gd.large <sup>1</sup>	630.00 / 10000.00	78.75 / 1250.00	3600.00 / 40000.00	✓	default
r7gd.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
r7gd.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
r7gd.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
r7gd.8xlarge	10000.00	1250.00	40000.00	✓	default
r7gd.12xlarge	15000.00	1875.00	60000.00	✓	default
r7gd.16xlarge	20000.00	2500.00	80000.00	✓	default
r7gd.metal	20000.00	2500.00	80000.00	✓	default
<b>R7i</b>					
r7i.large <sup>1</sup>	650.00 / 10000.00	81.25 / 1250.00	3600.00 / 40000.00	✓	default
r7i.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r7i.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	12000.00 / 40000.00	✓	default
r7i.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
r7i.8xlarge	10000.00	1250.00	40000.00	✓	default
r7i.12xlarge	15000.00	1875.00	60000.00	✓	default
r7i.16xlarge	20000.00	2500.00	80000.00	✓	default
r7i.24xlarge	30000.00	3750.00	120000.00	✓	default
r7i.48xlarge	40000.00	5000.00	240000.00	✓	default
r7i.metal-24xl	30000.00	3750.00	120000.00	✓	default
r7i.metal-48xl	40000.00	5000.00	240000.00	✓	default
<b>R7iz</b>					
r7iz.large <sup>1</sup>	792.00 / 10000.00	99.00 / 1250.00	3600.00 / 40000.00	✓	default
r7iz.xlarge <sup>1</sup>	1584.00 / 10000.00	198.00 / 1250.00	6667.00 / 40000.00	✓	default
r7iz.2xlarge <sup>1</sup>	3168.00 / 10000.00	396.00 / 1250.00	13333.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
r7iz.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
r7iz.8xlarge	10000.00	1250.00	40000.00	✓	default
r7iz.12xlarge	19000.00	2375.00	76000.00	✓	default
r7iz.16xlarge	20000.00	2500.00	80000.00	✓	default
r7iz.32xlarge	40000.00	5000.00	160000.00	✓	default
r7iz.meta l-16xl	20000.00	2500.00	80000.00	✓	default
r7iz.meta l-32xl	40000.00	5000.00	160000.00	✓	default
<b>U-3tb1</b>					
u-3tb1.56 xlarge	19000.00	2375.00	80000.00	✓	default
<b>U-6tb1</b>					
u-6tb1.56 xlarge	38000.00	4750.00	160000.00	✓	default
u-6tb1.11 2xlarge	38000.00	4750.00	160000.00	✓	default
u-6tb1.metal	38000.00	4750.00	160000.00	✓	default
<b>U-9tb1</b>					

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
u-9tb1.11 2xlarge	38000.00	4750.00	160000.00	✓	default
u-9tb1.metal	38000.00	4750.00	160000.00	✓	default
<b>U-12tb1</b>					
u-12tb1.1 12xlarge	38000.00	4750.00	160000.00	✓	default
u-12tb1.metal	38000.00	4750.00	160000.00	✓	default
<b>U-18tb1</b>					
u-18tb1.1 12xlarge	38000.00	4750.00	160000.00	✓	default
u-18tb1.metal	38000.00	4750.00	160000.00	✓	default
<b>U-24tb1</b>					
u-24tb1.1 12xlarge	38000.00	4750.00	160000.00	✓	default
u-24tb1.metal	38000.00	4750.00	160000.00	✓	default
<b>X1</b>					
x1.16xlarge	7000.00	875.00	40000.00	✗	default
x1.32xlarge	14000.00	1750.00	80000.00	✗	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>X2gd</b>					
x2gd.medium <sup>1</sup>	315.00 / 4750.00	39.38 / 593.75	2500.00 / 20000.00	✓	default
x2gd.large <sup>1</sup>	630.00 / 4750.00	78.75 / 593.75	3600.00 / 20000.00	✓	default
x2gd.xlarge <sup>1</sup>	1188.00 / 4750.00	148.50 / 593.75	6000.00 / 20000.00	✓	default
x2gd.2xlarge <sup>1</sup>	2375.00 / 4750.00	296.88 / 593.75	12000.00 / 20000.00	✓	default
x2gd.4xlarge	4750.00	593.75	20000.00	✓	default
x2gd.8xlarge	9500.00	1187.50	40000.00	✓	default
x2gd.12xlarge	14250.00	1781.25	60000.00	✓	default
x2gd.16xlarge	19000.00	2375.00	80000.00	✓	default
x2gd.metal	19000.00	2375.00	80000.00	✓	default
<b>X2idn</b>					
x2idn.16xlarge	40000.00	5000.00	173333.00	✓	default
x2idn.24xlarge	60000.00	7500.00	260000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
x2idn.32xlarge	80000.00	10000.00	260000.00	✓	default
x2idn.metal	80000.00	10000.00	260000.00	✓	default
<b>X2iedn</b>					
x2iedn.xlarge <sup>1</sup>	2500.00 / 20000.00	312.50 / 2500.00	8125.00 / 65000.00	✓	default
x2iedn.2xlarge <sup>1</sup>	5000.00 / 20000.00	625.00 / 2500.00	16250.00 / 65000.00	✓	default
x2iedn.4xlarge <sup>1</sup>	10000.00 / 20000.00	1250.00 / 2500.00	32500.00 / 65000.00	✓	default
x2iedn.8xlarge	20000.00	2500.00	65000.00	✓	default
x2iedn.16xlarge	40000.00	5000.00	130000.00	✓	default
x2iedn.24xlarge	60000.00	7500.00	195000.00	✓	default
x2iedn.32xlarge	80000.00	10000.00	260000.00	✓	default
x2iedn.metal	80000.00	10000.00	260000.00	✓	default
<b>X2iezn</b>					
x2iezn.2xlarge	3170.00	396.25	13333.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
x2iezn.4xlarge	4750.00	593.75	20000.00	✓	default
x2iezn.6xlarge	9500.00	1187.50	40000.00	✓	default
x2iezn.8xlarge	12000.00	1500.00	55000.00	✓	default
x2iezn.12xlarge	19000.00	2375.00	80000.00	✓	default
x2iezn.metal	19000.00	2375.00	80000.00	✓	default
<b>X1e</b>					
x1e.xlarge	500.00	62.50	3700.00	✗	default
x1e.2xlarge	1000.00	125.00	7400.00	✗	default
x1e.4xlarge	1750.00	218.75	10000.00	✗	default
x1e.8xlarge	3500.00	437.50	20000.00	✗	default
x1e.16xlarge	7000.00	875.00	40000.00	✗	default
x1e.32xlarge	14000.00	1750.00	80000.00	✗	default
<b>z1d</b>					
z1d.large <sup>1</sup>	800.00 / 3170.00	100.00 / 396.25	3333.00 / 13333.00	✓	default



Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
z1d.xlarge <sup>1</sup>	1580.00 / 3170.00	197.50 / 396.25	6667.00 / 13333.00	✓	default
z1d.2xlarge	3170.00	396.25	13333.00	✓	default
z1d.3xlarge	4750.00	593.75	20000.00	✓	default
z1d.6xlarge	9500.00	1187.50	40000.00	✓	default
z1d.12xlarge	19000.00	2375.00	80000.00	✓	default
z1d.metal	19000.00	2375.00	80000.00	✓	default

### Note

<sup>1</sup> These instances can support maximum performance for 30 minutes at least once every 24 hours, after which they revert to their baseline performance. Other instances can sustain the maximum performance indefinitely. If your workload requires sustained maximum performance for longer than 30 minutes, use one of these instances.

<sup>2</sup> default indicates that instances are enabled for EBS optimization by default.

supported indicates that instances can optionally be enabled for EBS optimization For more information, see [Amazon EBS-optimized instances](#).

## Instance store specifications

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
<b>R5ad</b>					

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
r5ad.large	1 x 75 GB	NVMe SSD	30,000 / 15,000		✓
r5ad.xlarge	1 x 150 GB	NVMe SSD	59,000 / 29,000		✓
r5ad.2xlarge	1 x 300 GB	NVMe SSD	117,000 / 57,000		✓
r5ad.4xlarge	2 x 300 GB	NVMe SSD	234,000 / 114,000		✓
r5ad.8xlarge	2 x 600 GB	NVMe SSD	466,666 / 233,334		✓
r5ad.12xlarge	2 x 900 GB	NVMe SSD	700,000 / 340,000		✓
r5ad.16xlarge	4 x 600 GB	NVMe SSD	933,332 / 466,668		✓
r5ad.24xlarge	4 x 900 GB	NVMe SSD	1,400,000 / 680,000		✓
<b>R5d</b>					
r5d.large	1 x 75 GB	NVMe SSD	30,000 / 15,000		✓
r5d.xlarge	1 x 150 GB	NVMe SSD	59,000 / 29,000		✓
r5d.2xlarge	1 x 300 GB	NVMe SSD	117,000 / 57,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
r5d.4xlarge	2 x 300 GB	NVMe SSD	234,000 / 114,000		✓
r5d.8xlarge	2 x 600 GB	NVMe SSD	466,666 / 233,334		✓
r5d.12xlarge	2 x 900 GB	NVMe SSD	700,000 / 340,000		✓
r5d.16xlarge	4 x 600 GB	NVMe SSD	933,332 / 466,668		✓
r5d.24xlarge	4 x 900 GB	NVMe SSD	1,400,000 / 680,000		✓
r5d.metal	4 x 900 GB	NVMe SSD	1,400,000 / 680,000		✓
<b>R5dn</b>					
r5dn.large	1 x 75 GB	NVMe SSD	29,000 / 14,500		✓
r5dn.xlarge	1 x 150 GB	NVMe SSD	58,000 / 29,000		✓
r5dn.2xlarge	1 x 300 GB	NVMe SSD	116,000 / 58,000		✓
r5dn.4xlarge	2 x 300 GB	NVMe SSD	232,000 / 116,000		✓
r5dn.8xlarge	2 x 600 GB	NVMe SSD	464,000 / 232,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
r5dn.12xlarge	2 x 900 GB	NVMe SSD	700,000 / 350,000		✓
r5dn.16xlarge	4 x 600 GB	NVMe SSD	930,000 / 465,000		✓
r5dn.24xlarge	4 x 900 GB	NVMe SSD	1,400,000 / 700,000		✓
r5dn.metal	4 x 900 GB	NVMe SSD	1,400,000 / 700,000		✓
<b>R6gd</b>					
r6gd.medium	1 x 59 GB	NVMe SSD	13,438 / 5,625		✓
r6gd.large	1 x 118 GB	NVMe SSD	26,875 / 11,250		✓
r6gd.xlarge	1 x 237 GB	NVMe SSD	53,750 / 22,500		✓
r6gd.2xlarge	1 x 474 GB	NVMe SSD	107,500 / 45,000		✓
r6gd.4xlarge	1 x 950 GB	NVMe SSD	215,000 / 90,000		✓
r6gd.8xlarge	1 x 1900 GB	NVMe SSD	430,000 / 180,000		✓
r6gd.12xlarge	2 x 1425 GB	NVMe SSD	645,000 / 270,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
r6gd.16xlarge	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
r6gd.metal	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
<b>R6idn</b>					
r6idn.large	1 x 118 GB	NVMe SSD	33,542 / 16,771		✓
r6idn.xlarge	1 x 237 GB	NVMe SSD	67,083 / 33,542		✓
r6idn.2xlarge	1 x 474 GB	NVMe SSD	134,167 / 67,084		✓
r6idn.4xlarge	1 x 950 GB	NVMe SSD	268,333 / 134,167		✓
r6idn.8xlarge	1 x 1900 GB	NVMe SSD	536,666 / 268,334		✓
r6idn.12xlarge	2 x 1425 GB	NVMe SSD	804,998 / 402,500		✓
r6idn.16xlarge	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓
r6idn.24xlarge	4 x 1425 GB	NVMe SSD	1,609,996 / 805,000		✓
r6idn.32xlarge	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
r6idn.metal	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓
<b>R6id</b>					
r6id.large	1 x 118 GB	NVMe SSD	33,542 / 16,771		✓
r6id.xlarge	1 x 237 GB	NVMe SSD	67,083 / 33,542		✓
r6id.2xlarge	1 x 474 GB	NVMe SSD	134,167 / 67,084		✓
r6id.4xlarge	1 x 950 GB	NVMe SSD	268,333 / 134,167		✓
r6id.8xlarge	1 x 1900 GB	NVMe SSD	536,666 / 268,334		✓
r6id.12xlarge	2 x 1425 GB	NVMe SSD	804,998 / 402,500		✓
r6id.16xlarge	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓
r6id.24xlarge	4 x 1425 GB	NVMe SSD	1,609,996 / 805,000		✓
r6id.32xlarge	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓
r6id.metal	4 x 1900 GB	NVMe SSD	2,146,664 / 1,073,336		✓
<b>R7gd</b>					

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
r7gd.medium	1 x 59 GB	NVMe SSD	16,771 / 8,385		✓
r7gd.large	1 x 118 GB	NVMe SSD	33,542 / 16,771		✓
r7gd.xlarge	1 x 237 GB	NVMe SSD	67,083 / 33,542		✓
r7gd.2xlarge	1 x 474 GB	NVMe SSD	134,167 / 67,084		✓
r7gd.4xlarge	1 x 950 GB	NVMe SSD	268,333 / 134,167		✓
r7gd.8xlarge	1 x 1900 GB	NVMe SSD	536,666 / 268,334		✓
r7gd.12xlarge	2 x 1425 GB	NVMe SSD	804,998 / 402,500		✓
r7gd.16xlarge	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓
r7gd.metal	2 x 1900 GB	NVMe SSD	1,073,332 / 536,668		✓
<b>X1</b>					
x1.16xlarge	1 x 1920 GB	SSD		✓	
x1.32xlarge	2 x 1920 GB	SSD		✓	
<b>X2gd</b>					

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
x2gd.medium	1 x 59 GB	NVMe SSD	13,438 / 5,625		✓
x2gd.large	1 x 118 GB	NVMe SSD	26,875 / 11,250		✓
x2gd.xlarge	1 x 237 GB	NVMe SSD	53,750 / 22,500		✓
x2gd.2xlarge	1 x 475 GB	NVMe SSD	107,500 / 45,000		✓
x2gd.4xlarge	1 x 950 GB	NVMe SSD	215,000 / 90,000		✓
x2gd.8xlarge	1 x 1900 GB	NVMe SSD	430,000 / 180,000		✓
x2gd.12xlarge	2 x 1425 GB	NVMe SSD	645,000 / 270,000		✓
x2gd.16xlarge	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
x2gd.metal	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
<b>X2idn</b>					
x2idn.16xlarge	1 x 1900 GB	NVMe SSD	430,000 / 180,000		✓
x2idn.24xlarge	2 x 1425 GB	NVMe SSD	645,000 / 270,000		✓



Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
x2idn.32xlarge	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
x2idn.metal	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
<b>X2iedn</b>					
x2iedn.xlarge	1 x 118 GB	NVMe SSD	26,875 / 11,250		✓
x2iedn.2xlarge	1 x 237 GB	NVMe SSD	53,750 / 22,500		✓
x2iedn.4xlarge	1 x 475 GB	NVMe SSD	107,500 / 45,000		✓
x2iedn.8xlarge	1 x 950 GB	NVMe SSD	215,000 / 90,000		✓
x2iedn.16xlarge	1 x 1900 GB	NVMe SSD	430,000 / 180,000		✓
x2iedn.24xlarge	2 x 1425 GB	NVMe SSD	645,000 / 270,000		✓
x2iedn.32xlarge	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
x2iedn.metal	2 x 1900 GB	NVMe SSD	860,000 / 360,000		✓
<b>X1e</b>					
x1e.xlarge	1 x 120 GB	SSD		✓	

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
x1e.2xlarge	1 x 240 GB	SSD		✓	
x1e.4xlarge	1 x 480 GB	SSD		✓	
x1e.8xlarge	1 x 960 GB	SSD		✓	
x1e.16xlarge	1 x 1920 GB	SSD		✓	
x1e.32xlarge	2 x 1920 GB	SSD		✓	
<b>z1d</b>					
z1d.large	1 x 75 GB	NVMe SSD	30,000 / 15,000		✓
z1d.xlarge	1 x 150 GB	NVMe SSD	59,000 / 29,000		✓
z1d.2xlarge	1 x 300 GB	NVMe SSD	117,000 / 57,000		✓
z1d.3xlarge	1 x 450 GB	NVMe SSD	175,000 / 75,000		✓
z1d.6xlarge	1 x 900 GB	NVMe SSD	350,000 / 170,000		✓
z1d.12xlarge	2 x 900 GB	NVMe SSD	700,000 / 340,000		✓
z1d.metal	2 x 900 GB	NVMe SSD	700,000 / 340,000		✓

<sup>1</sup> Volumes attached to certain instances suffer a first-write penalty unless initialized. For more information, see [Optimize disk performance for instance store volumes](#).

<sup>2</sup> For more information, see [Instance store volume TRIM support](#).

## Security specifications

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>R5</b>						
r5.large	✓	Instance store not supported	X	X	✓	X
r5.xlarge	✓	Instance store not supported	X	X	✓	✓
r5.2xlarge	✓	Instance store not supported	X	X	✓	✓
r5.4xlarge	✓	Instance store not supported	X	X	✓	✓
r5.8xlarge	✓	Instance store not supported	X	X	✓	✓
r5.12xlarge	✓	Instance store not supported	X	X	✓	✓
r5.16xlarge	✓	Instance store not supported	X	X	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r5.24xlarge	✓	Instance store not supported	X	X	✓	✓
r5.metal	✓	Instance store not supported	X	X	X	X
<b>R5a</b>						
r5a.large	✓	Instance store not supported	X	X	✓	X
r5a.xlarge	✓	Instance store not supported	X	X	✓	✓
r5a.2xlarge	✓	Instance store not supported	X	X	✓	✓
r5a.4xlarge	✓	Instance store not supported	X	X	✓	✓
r5a.8xlarge	✓	Instance store not supported	X	X	✓	✓
r5a.12xlarge	✓	Instance store not supported	X	X	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r5a.16xlarge	✓	Instance store not supported	X	X	✓	✓
r5a.24xlarge	✓	Instance store not supported	X	X	✓	✓
<b>R5ad</b>						
r5ad.large	✓	✓	X	X	✓	X
r5ad.xlarge	✓	✓	X	X	✓	✓
r5ad.2xlarge	✓	✓	X	X	✓	✓
r5ad.4xlarge	✓	✓	X	X	✓	✓
r5ad.8xlarge	✓	✓	X	X	✓	✓
r5ad.12xlarge	✓	✓	X	X	✓	✓
r5ad.16xlarge	✓	✓	X	X	✓	✓
r5ad.24xlarge	✓	✓	X	X	✓	✓
<b>R5b</b>						
r5b.large	✓	Instance store not supported	X	X	✓	X
r5b.xlarge	✓	Instance store not supported	X	X	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r5b.2xlarge	✓	Instance store not supported	X	X	✓	✓
r5b.4xlarge	✓	Instance store not supported	X	X	✓	✓
r5b.8xlarge	✓	Instance store not supported	X	X	✓	✓
r5b.12xlarge	✓	Instance store not supported	X	X	✓	✓
r5b.16xlarge	✓	Instance store not supported	X	X	✓	✓
r5b.24xlarge	✓	Instance store not supported	X	X	✓	✓
r5b.metal	✓	Instance store not supported	X	X	X	X
<b>R5d</b>						
r5d.large	✓	✓	X	X	✓	X
r5d.xlarge	✓	✓	X	X	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r5d.2xlarge	✓	✓	X	X	✓	✓
r5d.4xlarge	✓	✓	X	X	✓	✓
r5d.8xlarge	✓	✓	X	X	✓	✓
r5d.12xlarge	✓	✓	X	X	✓	✓
r5d.16xlarge	✓	✓	X	X	✓	✓
r5d.24xlarge	✓	✓	X	X	✓	✓
r5d.metal	✓	✓	X	X	X	X
<b>R5dn</b>						
r5dn.large	✓	✓	✓	X	✓	X
r5dn.xlarge	✓	✓	✓	X	✓	✓
r5dn.2xlarge	✓	✓	✓	X	✓	✓
r5dn.4xlarge	✓	✓	✓	X	✓	✓
r5dn.8xlarge	✓	✓	✓	X	✓	✓
r5dn.12xlarge	✓	✓	✓	X	✓	✓
r5dn.16xlarge	✓	✓	✓	X	✓	✓
r5dn.24xlarge	✓	✓	✓	X	✓	✓
r5dn.metal	✓	✓	✓	X	X	X
<b>R5n</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r5n.large	✓	Instance store not supported	✓	✗	✓	✗
r5n.xlarge	✓	Instance store not supported	✓	✗	✓	✓
r5n.2xlarge	✓	Instance store not supported	✓	✗	✓	✓
r5n.4xlarge	✓	Instance store not supported	✓	✗	✓	✓
r5n.8xlarge	✓	Instance store not supported	✓	✗	✓	✓
r5n.12xlarge	✓	Instance store not supported	✓	✗	✓	✓
r5n.16xlarge	✓	Instance store not supported	✓	✗	✓	✓
r5n.24xlarge	✓	Instance store not supported	✓	✗	✓	✓



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r5n.metal	✓	Instance store not supported	✓	✗	✗	✗
<b>R6a</b>						
r6a.large	✓	Instance store not supported	✓	✓	✓	✗
r6a.xlarge	✓	Instance store not supported	✓	✓	✓	✓
r6a.2xlarge	✓	Instance store not supported	✓	✓	✓	✓
r6a.4xlarge	✓	Instance store not supported	✓	✓	✓	✓
r6a.8xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6a.12xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6a.16xlarge	✓	Instance store not supported	✓	✗	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r6a.24xlarge	✓	Instance store not supported	✓	X	✓	✓
r6a.32xlarge	✓	Instance store not supported	✓	X	✓	✓
r6a.48xlarge	✓	Instance store not supported	✓	X	✓	✓
r6a.metal	✓	Instance store not supported	✓	X	X	X
<b>R6g</b>						
r6g.medium	✓	Instance store not supported	X	X	X	X
r6g.large	✓	Instance store not supported	X	X	X	✓
r6g.xlarge	✓	Instance store not supported	X	X	X	✓
r6g.2xlarge	✓	Instance store not supported	X	X	X	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r6g.4xlarge	✓	Instance store not supported	X	X	X	✓
r6g.8xlarge	✓	Instance store not supported	X	X	X	✓
r6g.12xlarge	✓	Instance store not supported	X	X	X	✓
r6g.16xlarge	✓	Instance store not supported	X	X	X	✓
r6g.metal	✓	Instance store not supported	X	X	X	X
<b>R6gd</b>						
r6gd.medium	✓	✓	X	X	X	X
r6gd.large	✓	✓	X	X	X	✓
r6gd.xlarge	✓	✓	X	X	X	✓
r6gd.2xlarge	✓	✓	X	X	X	✓
r6gd.4xlarge	✓	✓	X	X	X	✓
r6gd.8xlarge	✓	✓	X	X	X	✓
r6gd.12xlarge	✓	✓	X	X	X	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r6gd.16xlarge	✓	✓	X	X	X	✓
r6gd.metal	✓	✓	X	X	X	X
<b>R6i</b>						
r6i.large	✓	Instance store not supported	✓	X	✓	X
r6i.xlarge	✓	Instance store not supported	✓	X	✓	✓
r6i.2xlarge	✓	Instance store not supported	✓	X	✓	✓
r6i.4xlarge	✓	Instance store not supported	✓	X	✓	✓
r6i.8xlarge	✓	Instance store not supported	✓	X	✓	✓
r6i.12xlarge	✓	Instance store not supported	✓	X	✓	✓
r6i.16xlarge	✓	Instance store not supported	✓	X	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r6i.24xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6i.32xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6i.metal	✓	Instance store not supported	✓	✗	✗	✗
<b>R6idn</b>						
r6idn.large	✓	✓	✓	✗	✓	✗
r6idn.xlarge	✓	✓	✓	✗	✓	✓
r6idn.2xlarge	✓	✓	✓	✗	✓	✓
r6idn.4xlarge	✓	✓	✓	✗	✓	✓
r6idn.8xlarge	✓	✓	✓	✗	✓	✓
r6idn.12xlarge	✓	✓	✓	✗	✓	✓
r6idn.16xlarge	✓	✓	✓	✗	✓	✓
r6idn.24xlarge	✓	✓	✓	✗	✓	✓
r6idn.32xlarge	✓	✓	✓	✗	✓	✓
r6idn.metal	✓	✓	✓	✗	✗	✗
<b>R6in</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r6in.large	✓	Instance store not supported	✓	✗	✓	✗
r6in.xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6in.2xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6in.4xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6in.8xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6in.12xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6in.16xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6in.24xlarge	✓	Instance store not supported	✓	✗	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r6in.32xlarge	✓	Instance store not supported	✓	✗	✓	✓
r6in.metal	✓	Instance store not supported	✓	✗	✗	✗
<b>R6id</b>						
r6id.large	✓	✓	✓	✗	✓	✗
r6id.xlarge	✓	✓	✓	✗	✓	✓
r6id.2xlarge	✓	✓	✓	✗	✓	✓
r6id.4xlarge	✓	✓	✓	✗	✓	✓
r6id.8xlarge	✓	✓	✓	✗	✓	✓
r6id.12xlarge	✓	✓	✓	✗	✓	✓
r6id.16xlarge	✓	✓	✓	✗	✓	✓
r6id.24xlarge	✓	✓	✓	✗	✓	✓
r6id.32xlarge	✓	✓	✓	✗	✓	✓
r6id.metal	✓	✓	✓	✗	✗	✗
<b>R7a</b>						
r7a.medium	✓	Instance store not supported	✓	✗	✓	✗

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r7a.large	✓	Instance store not supported	✓	X	✓	X
r7a.xlarge	✓	Instance store not supported	✓	X	✓	X
r7a.2xlarge	✓	Instance store not supported	✓	X	✓	X
r7a.4xlarge	✓	Instance store not supported	✓	X	✓	X
r7a.8xlarge	✓	Instance store not supported	✓	X	✓	X
r7a.12xlarge	✓	Instance store not supported	✓	X	✓	X
r7a.16xlarge	✓	Instance store not supported	✓	X	✓	X
r7a.24xlarge	✓	Instance store not supported	✓	X	✓	X



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r7a.32xlarge	✓	Instance store not supported	✓	X	✓	X
r7a.48xlarge	✓	Instance store not supported	✓	X	✓	X
r7a.metal-48xl	✓	Instance store not supported	✓	X	X	X
<b>R7g</b>						
r7g.medium	✓	Instance store not supported	✓	X	X	X
r7g.large	✓	Instance store not supported	✓	X	X	X
r7g.xlarge	✓	Instance store not supported	✓	X	X	X
r7g.2xlarge	✓	Instance store not supported	✓	X	X	X
r7g.4xlarge	✓	Instance store not supported	✓	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r7g.8xlarge	✓	Instance store not supported	✓	X	X	X
r7g.12xlarge	✓	Instance store not supported	✓	X	X	X
r7g.16xlarge	✓	Instance store not supported	✓	X	X	X
r7g.metal	✓	Instance store not supported	✓	X	X	X
<b>R7gd</b>						
r7gd.medium	✓	✓	✓	X	X	X
r7gd.large	✓	✓	✓	X	X	X
r7gd.xlarge	✓	✓	✓	X	X	X
r7gd.2xlarge	✓	✓	✓	X	X	X
r7gd.4xlarge	✓	✓	✓	X	X	X
r7gd.8xlarge	✓	✓	✓	X	X	X
r7gd.12xlarge	✓	✓	✓	X	X	X
r7gd.16xlarge	✓	✓	✓	X	X	X
r7gd.metal	✓	✓	✓	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>R7i</b>						
r7i.large	✓	Instance store not supported	✓	X	✓	X
r7i.xlarge	✓	Instance store not supported	✓	X	✓	X
r7i.2xlarge	✓	Instance store not supported	✓	X	✓	X
r7i.4xlarge	✓	Instance store not supported	✓	X	✓	X
r7i.8xlarge	✓	Instance store not supported	✓	X	✓	X
r7i.12xlarge	✓	Instance store not supported	✓	X	✓	X
r7i.16xlarge	✓	Instance store not supported	✓	X	✓	X
r7i.24xlarge	✓	Instance store not supported	✓	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r7i.48xlarge	✓	Instance store not supported	✓	X	✓	X
r7i.metal-24xl	✓	Instance store not supported	✓	X	X	X
r7i.metal-48xl	✓	Instance store not supported	✓	X	X	X
<b>R7iz</b>						
r7iz.large	✓	Instance store not supported	✓	X	✓	X
r7iz.xlarge	✓	Instance store not supported	✓	X	✓	X
r7iz.2xlarge	✓	Instance store not supported	✓	X	✓	X
r7iz.4xlarge	✓	Instance store not supported	✓	X	✓	X
r7iz.8xlarge	✓	Instance store not supported	✓	X	✓	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r7iz.12xlarge	✓	Instance store not supported	✓	X	✓	X
r7iz.16xlarge	✓	Instance store not supported	✓	X	✓	X
r7iz.32xlarge	✓	Instance store not supported	✓	X	✓	X
r7iz.metal-16xl	✓	Instance store not supported	✓	X	X	X
r7iz.metal-32xl	✓	Instance store not supported	✓	X	X	X
<b>U-3tb1</b>						
u-3tb1.56xlarge	✓	Instance store not supported	✓	X	X	X
<b>U-6tb1</b>						
u-6tb1.56xlarge	✓	Instance store not supported	✓	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
u-6tb1.112xlarge	✓	Instance store not supported	✓	X	X	X
u-6tb1.metal	✓	Instance store not supported	✓	X	X	X
<b>U-9tb1</b>						
u-9tb1.112xlarge	✓	Instance store not supported	✓	X	X	X
u-9tb1.metal	✓	Instance store not supported	✓	X	X	X
<b>U-12tb1</b>						
u-12tb1.112xlarge	✓	Instance store not supported	✓	X	X	X
u-12tb1.metal	✓	Instance store not supported	✓	X	X	X
<b>U-18tb1</b>						
u-18tb1.112xlarge	✓	Instance store not supported	✓	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
u-18tb1.metal	✓	Instance store not supported	✓	X	X	X
<b>U-24tb1</b>						
u-24tb1.112xlarge	✓	Instance store not supported	✓	X	X	X
u-24tb1.metal	✓	Instance store not supported	✓	X	X	X
<b>X1</b>						
x1.16xlarge	✓	X	X	X	X	X
x1.32xlarge	✓	X	X	X	X	X
<b>X2gd</b>						
x2gd.medium	✓	✓	X	X	X	X
x2gd.large	✓	✓	X	X	X	✓
x2gd.xlarge	✓	✓	X	X	X	✓
x2gd.2xlarge	✓	✓	X	X	X	✓
x2gd.4xlarge	✓	✓	X	X	X	✓
x2gd.8xlarge	✓	✓	X	X	X	✓
x2gd.12xlarge	✓	✓	X	X	X	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
x2gd.16xlarge	✓	✓	✗	✗	✗	✓
x2gd.metal	✓	✓	✗	✗	✗	✗
<b>X2idn</b>						
x2idn.16xlarge	✓	✓	✓	✗	✗	✓
x2idn.24xlarge	✓	✓	✓	✗	✗	✓
x2idn.32xlarge	✓	✓	✓	✗	✗	✓
x2idn.metal	✓	✓	✓	✗	✗	✗
<b>X2iedn</b>						
x2iedn.xlarge	✓	✓	✓	✗	✗	✓
x2iedn.2xlarge	✓	✓	✓	✗	✗	✓
x2iedn.4xlarge	✓	✓	✓	✗	✗	✓
x2iedn.8xlarge	✓	✓	✓	✗	✗	✓
x2iedn.16xlarge	✓	✓	✓	✗	✗	✓
x2iedn.24xlarge	✓	✓	✓	✗	✗	✓
x2iedn.32xlarge	✓	✓	✓	✗	✗	✓
x2iedn.metal	✓	✓	✓	✗	✗	✗
<b>X2iezn</b>						



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
x2iezn.2xlarge	✓	Instance store not supported	✓	✗	✗	✓
x2iezn.4xlarge	✓	Instance store not supported	✓	✗	✗	✓
x2iezn.6xlarge	✓	Instance store not supported	✓	✗	✗	✓
x2iezn.8xlarge	✓	Instance store not supported	✓	✗	✗	✓
x2iezn.12xlarge	✓	Instance store not supported	✓	✗	✗	✓
x2iezn.metal	✓	Instance store not supported	✓	✗	✗	✗
<b>X1e</b>						
x1e.xlarge	✓	✗	✗	✗	✗	✗
x1e.2xlarge	✓	✗	✗	✗	✗	✗
x1e.4xlarge	✓	✗	✗	✗	✗	✗
x1e.8xlarge	✓	✗	✗	✗	✗	✗

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
x1e.16xlarge	✓	X	X	X	X	X
x1e.32xlarge	✓	X	X	X	X	X
<b>z1d</b>						
z1d.large	✓	✓	X	X	✓	X
z1d.xlarge	✓	✓	X	X	✓	✓
z1d.2xlarge	✓	✓	X	X	✓	✓
z1d.3xlarge	✓	✓	X	X	✓	✓
z1d.6xlarge	✓	✓	X	X	✓	✓
z1d.12xlarge	✓	✓	X	X	✓	✓
z1d.metal	✓	✓	X	X	X	X

## Storage optimized instances

Storage optimized instances are designed for workloads that require high, sequential read and write access to very large data sets on local storage. They are optimized to deliver tens of thousands of low-latency, random I/O operations per second (IOPS) to applications.

### Contents

- [Available sizes](#)
- [Platform summary](#)
- [Performance specifications](#)
- [Network specifications](#)
- [Amazon EBS specifications](#)
- [Instance store specifications](#)

- [Security specifications](#)

## Available sizes

Instance type	Available sizes
D2	d2.xlarge   d2.2xlarge   d2.4xlarge   d2.8xlarge
D3	d3.xlarge   d3.2xlarge   d3.4xlarge   d3.8xlarge
D3en	d3en.xlarge   d3en.2xlarge   d3en.4xlarge   d3en.6xlarge   d3en.8xlarge   d3en.12xlarge
H1	h1.2xlarge   h1.4xlarge   h1.8xlarge   h1.16xlarge
I3	i3.large   i3.xlarge   i3.2xlarge   i3.4xlarge   i3.8xlarge   i3.16xlarge   i3.metal
I3en	i3en.large   i3en.xlarge   i3en.2xlarge   i3en.3xlarge   i3en.6xlarge   i3en.12xlarge   i3en.24xlarge   i3en.metal
I4g	i4g.large   i4g.xlarge   i4g.2xlarge   i4g.4xlarge   i4g.8xlarge   i4g.16xlarge
I4i	i4i.large   i4i.xlarge   i4i.2xlarge   i4i.4xlarge   i4i.8xlarge   i4i.12xlarge   i4i.16xlarge   i4i.24xlarge   i4i.32xlarge   i4i.metal
Im4gn	im4gn.large   im4gn.xlarge   im4gn.2xlarge   im4gn.4xlarge   im4gn.8xlarge   im4gn.16xlarge
Is4gen	is4gen.medium   is4gen.large   is4gen.xlarge   is4gen.2xlarge   is4gen.4xlarge   is4gen.8xlarge

## Platform summary

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
D2	Xen	Intel (x86_64)	x	✓	✓	x	Windows   Linux
D3	Nitro	Intel (x86_64)	x	x	✓	x	Windows   Linux
D3en	Nitro	Intel (x86_64)	x	x	✓	x	Windows   Linux
H1	Xen	Intel (x86_64)	x	✓	✓	x	Windows   Linux
I3	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
I3en	Nitro	Intel (x86_64)	✓	✓	✓	✓	Windows   Linux
I4g	Nitro	Amazon Graviton (arm64)	x	✓	✓	x	Linux
I4i	Nitro	Intel (x86_64)	✓	✓	✓	x	Windows   Linux
Im4gn	Nitro	Amazon Graviton (arm64)	x	✓	✓	x	Linux
Is4gen	Nitro	Amazon Graviton (arm64)	x	x	✓	x	Linux

## Performance specifications

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>D2</b>							
d2.xlarge	x	30.50	Intel Xeon E52676v3	4	2	2	x
d2.2xlarge	x	61.00	Intel Xeon E52676v3	8	4	2	x
d2.4xlarge	x	122.00	Intel Xeon E52676v3	16	8	2	x
d2.8xlarge	x	244.00	Intel Xeon E52676v3	36	18	2	x
<b>D3</b>							
d3.xlarge	x	32.00	Intel Xeon Platinum 8259	4	2	2	x
d3.2xlarge	x	64.00	Intel Xeon Platinum 8259	8	4	2	x
d3.4xlarge	x	128.00	Intel Xeon Platinum 8259	16	8	2	x
d3.8xlarge	x	256.00	Intel Xeon Platinum 8259	32	16	2	x
<b>D3en</b>							
d3en.xlarge	x	16.00	Intel Xeon Platinum 8259	4	2	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
d3en.2xlarge	x	32.00	Intel Xeon Platinum 8259	8	4	2	x
d3en.4xlarge	x	64.00	Intel Xeon Platinum 8259	16	8	2	x
d3en.6xlarge	x	96.00	Intel Xeon Platinum 8259	24	12	2	x
d3en.8xlarge	x	128.00	Intel Xeon Platinum 8259	32	16	2	x
d3en.12xlarge	x	192.00	Intel Xeon Platinum 8259	48	24	2	x
<b>H1</b>							
h1.2xlarge	x	32.00	Intel Broadwell E5-2686v4	8	4	2	x
h1.4xlarge	x	64.00	Intel Broadwell E5-2686v4	16	8	2	x
h1.8xlarge	x	128.00	Intel Broadwell E5-2686v4	32	16	2	x
h1.16xlarge	x	256.00	Intel Broadwell E5-2686v4	64	32	2	x
<b>I3</b>							
i3.large	x	15.25	Intel Broadwell E5-2686v4	2	1	2	x
i3.xlarge	x	30.50	Intel Broadwell E5-2686v4	4	2	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
i3.2xlarge	x	61.00	Intel Broadwell E5-2686v4	8	4	2	x
i3.4xlarge	x	122.00	Intel Broadwell E5-2686v4	16	8	2	x
i3.8xlarge	x	244.00	Intel Broadwell E5-2686v4	32	16	2	x
i3.16xlarge	x	488.00	Intel Broadwell E5-2686v4	64	32	2	x
i3.metal	x	512.00	Intel Broadwell E5-2686v4	72	36	2	x
<b>I3en</b>							
i3en.large	x	16.00	Intel Xeon Platinum 8175	2	1	2	x
i3en.xlarge	x	32.00	Intel Xeon Platinum 8175	4	2	2	x
i3en.2xlarge	x	64.00	Intel Xeon Platinum 8175	8	4	2	x
i3en.3xlarge	x	96.00	Intel Xeon Platinum 8175	12	6	2	x
i3en.6xlarge	x	192.00	Intel Xeon Platinum 8175	24	12	2	x
i3en.12xlarge	x	384.00	Intel Xeon Platinum 8175	48	24	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
i3en.24xlarge	x	768.00	Intel Xeon Platinum 8175	96	48	2	x
i3en.metal	x	768.00	Intel Xeon Platinum 8175	96	48	2	x
<b>I4g</b>							
i4g.large	x	16.00	Amazon Graviton2 Processor	2	2	1	x
i4g.xlarge	x	32.00	Amazon Graviton2 Processor	4	4	1	x
i4g.2xlarge	x	64.00	Amazon Graviton2 Processor	8	8	1	x
i4g.4xlarge	x	128.00	Amazon Graviton2 Processor	16	16	1	x
i4g.8xlarge	x	256.00	Amazon Graviton2 Processor	32	32	1	x
i4g.16xlarge	x	512.00	Amazon Graviton2 Processor	64	64	1	x
<b>I4i</b>							



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
i4i.large	x	16.00	Intel Xeon Ice Lake	2	1	2	x
i4i.xlarge	x	32.00	Intel Xeon Ice Lake	4	2	2	x
i4i.2xlarge	x	64.00	Intel Xeon Ice Lake	8	4	2	x
i4i.4xlarge	x	128.00	Intel Xeon Ice Lake	16	8	2	x
i4i.8xlarge	x	256.00	Intel Xeon Ice Lake	32	16	2	x
i4i.12xlarge	x	384.00	Intel Xeon Ice Lake	48	24	2	x
i4i.16xlarge	x	512.00	Intel Xeon Ice Lake	64	32	2	x
i4i.24xlarge	x	768.00	Intel Xeon Ice Lake	96	48	2	x
i4i.32xlarge	x	1024.00	Intel Xeon Ice Lake	128	64	2	x
i4i.metal	x	1024.00	Intel Xeon Ice Lake	128	64	2	x
<b>Im4gn</b>							
im4gn.large	x	8.00	Amazon Graviton2 Processor	2	2	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
im4gn.xlarge	X	16.00	Amazon Graviton2 Processor	4	4	1	X
im4gn.2xlarge	X	32.00	Amazon Graviton2 Processor	8	8	1	X
im4gn.4xlarge	X	64.00	Amazon Graviton2 Processor	16	16	1	X
im4gn.8xlarge	X	128.00	Amazon Graviton2 Processor	32	32	1	X
im4gn.16xlarge	X	256.00	Amazon Graviton2 Processor	64	64	1	X
<b>Is4gen</b>							
is4gen.medium	X	6.00	Amazon Graviton2 Processor	1	1	1	X
is4gen.large	X	12.00	Amazon Graviton2 Processor	2	2	1	X
is4gen.xlarge	X	24.00	Amazon Graviton2 Processor	4	4	1	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
is4gen.2xlarge	x	48.00	Amazon Graviton2 Processor	8	8	1	x
is4gen.4xlarge	x	96.00	Amazon Graviton2 Processor	16	16	1	x
is4gen.8xlarge	x	192.00	Amazon Graviton2 Processor	32	32	1	x

## Network specifications

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>D2</b>								
d2.xlarge	Moderate	x	x <sup>2</sup>	x	1	4	15	✓
d2.2xlarge	High	x	x <sup>2</sup>	x	1	4	15	✓
d2.4xlarge	High	x	x <sup>2</sup>	x	1	8	30	✓
d2.8xlarge	10 Gigabit	x	x <sup>2</sup>	x	1	8	30	✓
<b>D3</b>								
d3.xlarge <sup>1</sup>	3.0 / 15.0	x	✓	x	1	4	3	✓
d3.2xlarge <sup>1</sup>	6.0 / 15.0	x	✓	x	1	4	5	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
d3.4xlarge <sup>1</sup>	12.5 / 15.0	x	✓	x	1	4	10	✓
d3.8xlarge	25 Gigabit	x	✓	x	1	3	20	✓
<b>D3en</b>								
d3en.xlarge <sup>1</sup>	6.0 / 25.0	x	✓	x	1	4	3	✓
d3en.2xlarge <sup>1</sup>	12.5 / 25.0	x	✓	x	1	4	5	✓
d3en.4xlarge	25 Gigabit	x	✓	x	1	4	10	✓
d3en.6xlarge	40 Gigabit	x	✓	x	1	4	15	✓
d3en.8xlarge	50 Gigabit	x	✓	x	1	4	20	✓
d3en.12xlarge	75 Gigabit	x	✓	x	1	3	30	✓
<b>H1</b>								
h1.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
h1.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
h1.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
h1.16xlarge	25 Gigabit	x	✓	x	1	8	50	✓
<b>I3</b>								
i3.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
i3.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
i3.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
i3.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
i3.xlarge	10 Gigabit	x	✓	x	1	8	30	✓
i3.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
i3.metal	25 Gigabit	x	✓	x	1	15	50	✓
<b>I3en</b>								
i3en.large <sup>1</sup>	2.1 / 25.0	x	✓	x	1	3	10	✓
i3en.xlarge <sup>1</sup>	4.2 / 25.0	x	✓	x	1	4	15	✓
i3en.2xlarge <sup>1</sup>	8.4 / 25.0	x	✓	x	1	4	15	✓
i3en.3xlarge <sup>1</sup>	12.5 / 25.0	x	✓	x	1	4	15	✓
i3en.6xlarge	25 Gigabit	x	✓	x	1	8	30	✓
i3en.12xlarge	50 Gigabit	✓	✓	x	1	8	30	✓
i3en.24xlarge	100 Gigabit	✓	✓	x	1	15	50	✓
i3en.metal	100 Gigabit	✓	✓	x	1	15	50	✓
<b>I4g</b>								
i4g.large <sup>1</sup>	0.781 / 10.0	x	✓	x	1	3	10	✓
i4g.xlarge <sup>1</sup>	1.875 / 10.0	x	✓	x	1	4	15	✓
i4g.2xlarge <sup>1</sup>	4.687 / 12.0	x	✓	x	1	4	15	✓
i4g.4xlarge <sup>1</sup>	9.375 / 25.0	x	✓	✓	1	8	30	✓
i4g.8xlarge	18.75 Gigabit	x	✓	✓	1	8	30	✓
i4g.16xlarge	37.5 Gigabit	✓	✓	✓	1	15	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>I4i</b>								
i4i.large <sup>1</sup>	0.781 / 10.0	x	✓	x	1	3	10	✓
i4i.xlarge <sup>1</sup>	1.875 / 10.0	x	✓	x	1	4	15	✓
i4i.2xlarge <sup>1</sup>	4.687 / 12.0	x	✓	x	1	4	15	✓
i4i.4xlarge <sup>1</sup>	9.375 / 25.0	x	✓	x	1	8	30	✓
i4i.8xlarge	18.75 Gigabit	x	✓	✓	1	8	30	✓
i4i.12xlarge	28.12 Gigabit	x	✓	✓	1	8	30	✓
i4i.16xlarge	37.5 Gigabit	x	✓	✓	1	15	50	✓
i4i.24xlarge	56.25 Gigabit	x	✓	✓	1	15	30	✓
i4i.32xlarge	75 Gigabit	✓	✓	✓	1	15	50	✓
i4i.metal	75 Gigabit	✓	✓	✓	1	15	50	✓
<b>Im4gn</b>								
im4gn.large <sup>1</sup>	3.125 / 25.0	x	✓	x	1	3	10	✓
im4gn.xlarge <sup>1</sup>	6.25 / 25.0	x	✓	x	1	4	15	✓
im4gn.2xlarge <sup>1</sup>	12.5 / 25.0	x	✓	x	1	4	15	✓
im4gn.4xlarge	25 Gigabit	x	✓	✓	1	8	30	✓
im4gn.8xlarge	50 Gigabit	x	✓	✓	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
im4gn.16xlarge	100 Gigabit	✓	✓	✓	1	15	50	✓
<b>Is4gen</b>								
is4gen.medium <sup>1</sup>	1.562 / 25.0	x	✓	x	1	2	4	✓
is4gen.large <sup>1</sup>	3.125 / 25.0	x	✓	x	1	3	10	✓
is4gen.xlarge <sub>1</sub>	6.25 / 25.0	x	✓	x	1	4	15	✓
is4gen.2xlarge <sub>1</sub>	12.5 / 25.0	x	✓	x	1	4	15	✓
is4gen.4xlarge	25 Gigabit	x	✓	x	1	8	30	✓
is4gen.8xlarge	50 Gigabit	x	✓	x	1	8	30	✓

**Note**

<sup>1</sup> These instances have a baseline bandwidth and can use a network I/O credit mechanism to burst beyond their baseline bandwidth on a best effort basis. Other instances types can sustain their maximum performance indefinitely. For more information, see [instance network bandwidth](#).

<sup>2</sup> These instances support enhanced networking using the Intel 82599 VF interface.

## Amazon EBS specifications

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>D2</b>					
d2.xlarge	750.00	93.75	6000.00	✗	default
d2.2xlarge	1000.00	125.00	8000.00	✗	default
d2.4xlarge	2000.00	250.00	16000.00	✗	default
d2.8xlarge	4000.00	500.00	32000.00	✗	default
<b>D3</b>					
d3.xlarge <sup>1</sup>	850.00 / 2800.00	106.25 / 350.00	5000.00 / 15000.00	✓	default
d3.2xlarge <sup>1</sup>	1700.00 / 2800.00	212.50 / 350.00	10000.00 / 15000.00	✓	default
d3.4xlarge	2800.00	350.00	15000.00	✓	default
d3.8xlarge	5000.00	625.00	30000.00	✓	default
<b>D3en</b>					
d3en.xlarge <sup>1</sup>	850.00 / 2800.00	106.25 / 350.00	5000.00 / 15000.00	✓	default
d3en.2xlarge <sup>1</sup>	1700.00 / 2800.00	212.50 / 350.00	10000.00 / 15000.00	✓	default
d3en.4xlarge	2800.00	350.00	15000.00	✓	default



Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
d3en.6xlarge	4000.00	500.00	25000.00	✓	default
d3en.8xlarge	5000.00	625.00	30000.00	✓	default
d3en.12xlarge	7000.00	875.00	40000.00	✓	default
<b>H1</b>					
h1.2xlarge	1750.00	218.75	12000.00	✗	default
h1.4xlarge	3500.00	437.50	20000.00	✗	default
h1.8xlarge	7000.00	875.00	40000.00	✗	default
h1.16xlarge	14000.00	1750.00	80000.00	✗	default
<b>I3</b>					
i3.large	425.00	53.12	3000.00	✗	default
i3.xlarge	850.00	106.25	6000.00	✗	default
i3.2xlarge	1700.00	212.50	12000.00	✗	default
i3.4xlarge	3500.00	437.50	16000.00	✗	default
i3.8xlarge	7000.00	875.00	32500.00	✗	default
i3.16xlarge	14000.00	1750.00	65000.00	✗	default
i3.metal	19000.00	2375.00	80000.00	✓	default
<b>I3en</b>					

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
i3en.large <sup>1</sup>	576.00 / 4750.00	72.10 / 593.75	3000.00 / 20000.00	✓	default
i3en.xlarge <sup>1</sup>	1153.00 / 4750.00	144.20 / 593.75	6000.00 / 20000.00	✓	default
i3en.2xlarge <sup>1</sup>	2307.00 / 4750.00	288.39 / 593.75	12000.00 / 20000.00	✓	default
i3en.3xlarge <sup>1</sup>	3800.00 / 4750.00	475.00 / 593.75	15000.00 / 20000.00	✓	default
i3en.6xlarge	4750.00	593.75	20000.00	✓	default
i3en.12xlarge	9500.00	1187.50	40000.00	✓	default
i3en.24xlarge	19000.00	2375.00	80000.00	✓	default
i3en.metal	19000.00	2375.00	80000.00	✓	default
<b>I4g</b>					
i4g.large <sup>1</sup>	625.00 / 10000.00	78.12 / 1250.00	2500.00 / 40000.00	✓	default
i4g.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	5000.00 / 40000.00	✓	default
i4g.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	10000.00 / 40000.00	✓	default
i4g.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
i4g.8xlarge	10000.00	1250.00	40000.00	✓	default
i4g.16xlarge	20000.00	2500.00	80000.00	✓	default
<b>I4i</b>					
i4i.large <sup>1</sup>	625.00 / 10000.00	78.12 / 1250.00	2500.00 / 40000.00	✓	default
i4i.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	5000.00 / 40000.00	✓	default
i4i.2xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	10000.00 / 40000.00	✓	default
i4i.4xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
i4i.8xlarge	10000.00	1250.00	40000.00	✓	default
i4i.12xlarge	15000.00	1875.00	60000.00	✓	default
i4i.16xlarge	20000.00	2500.00	80000.00	✓	default
i4i.24xlarge	30000.00	3750.00	120000.00	✓	default
i4i.32xlarge	40000.00	5000.00	160000.00	✓	default
i4i.metal	40000.00	5000.00	160000.00	✓	default
<b>Im4gn</b>					
im4gn.large <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	5000.00 / 40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
im4gn.xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	10000.00 / 40000.00	✓	default
im4gn.2xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
im4gn.4xlarge	10000.00	1250.00	40000.00	✓	default
im4gn.8xlarge	20000.00	2500.00	80000.00	✓	default
im4gn.16xlarge	40000.00	5000.00	160000.00	✓	default
<b>Is4gen</b>					
is4gen.medium <sup>1</sup>	625.00 / 10000.00	78.12 / 1250.00	2500.00 / 40000.00	✓	default
is4gen.large <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	5000.00 / 40000.00	✓	default
is4gen.xlarge <sup>1</sup>	2500.00 / 10000.00	312.50 / 1250.00	10000.00 / 40000.00	✓	default
is4gen.2xlarge <sup>1</sup>	5000.00 / 10000.00	625.00 / 1250.00	20000.00 / 40000.00	✓	default
is4gen.4xlarge	10000.00	1250.00	40000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
is4gen.8xlarge	20000.00	2500.00	80000.00	✓	default

### Note

<sup>1</sup> These instances can support maximum performance for 30 minutes at least once every 24 hours, after which they revert to their baseline performance. Other instances can sustain the maximum performance indefinitely. If your workload requires sustained maximum performance for longer than 30 minutes, use one of these instances.

<sup>2</sup> default indicates that instances are enabled for EBS optimization by default. supported indicates that instances can optionally be enabled for EBS optimization. For more information, see [Amazon EBS-optimized instances](#).

## Instance store specifications

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
<b>D2</b>					
d2.xlarge	3 x 2048 GB	HDD		✓	
d2.2xlarge	6 x 2048 GB	HDD		✓	
d2.4xlarge	12 x 2048 GB	HDD		✓	
d2.8xlarge	24 x 2048 GB	HDD		✓	

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
<b>D3</b>					
d3.xlarge	3 x 1980 GB	NVMe HDD			✓
d3.2xlarge	6 x 1980 GB	NVMe HDD			✓
d3.4xlarge	12 x 1980 GB	NVMe HDD			✓
d3.8xlarge	24 x 1980 GB	NVMe HDD			✓
<b>D3en</b>					
d3en.xlarge	2 x 13980 GB	NVMe HDD			✓
d3en.2xlarge	4 x 13980 GB	NVMe HDD			✓
d3en.4xlarge	8 x 13980 GB	NVMe HDD			✓
d3en.6xlarge	12 x 13980 GB	NVMe HDD			✓
d3en.8xlarge	16 x 13980 GB	NVMe HDD			✓
d3en.12xlarge	24 x 13980 GB	NVMe HDD			✓
<b>H1</b>					

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
h1.2xlarge	1 x 2000 GB	HDD		✓	
h1.4xlarge	2 x 2000 GB	HDD		✓	
h1.8xlarge	4 x 2000 GB	HDD		✓	
h1.16xlarge	8 x 2000 GB	HDD		✓	
<b>I3</b>					
i3.large	1 x 475 GB	NVMe SSD	103,125 / 35,000		✓
i3.xlarge	1 x 950 GB	NVMe SSD	206,250 / 70,000		✓
i3.2xlarge	1 x 1900 GB	NVMe SSD	412,500 / 180,000		✓
i3.4xlarge	2 x 1900 GB	NVMe SSD	825,000 / 360,000		✓
i3.8xlarge	4 x 1900 GB	NVMe SSD	1,650,000 / 720,000		✓
i3.16xlarge	8 x 1900 GB	NVMe SSD	3,300,000 / 1,440,000		✓
i3.metal	8 x 1900 GB	NVMe SSD	3,300,000 / 1,440,000		✓
<b>I3en</b>					
i3en.large	1 x 1250 GB	NVMe SSD	42,500 / 32,500		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
i3en.xlarge	1 x 2500 GB	NVMe SSD	85,000 / 65,000		✓
i3en.2xlarge	2 x 2500 GB	NVMe SSD	170,000 / 130,000		✓
i3en.3xlarge	1 x 7500 GB	NVMe SSD	250,000 / 200,000		✓
i3en.6xlarge	2 x 7500 GB	NVMe SSD	500,000 / 400,000		✓
i3en.12xlarge	4 x 7500 GB	NVMe SSD	1,000,000 / 800,000		✓
i3en.24xlarge	8 x 7500 GB	NVMe SSD	2,000,000 / 1,600,000		✓
i3en.metal	8 x 7500 GB	NVMe SSD	2,000,000 / 1,600,000		✓
<b>I4g</b>					
i4g.large	1 x 468 GB	NVMe SSD	31,250 / 25,000		✓
i4g.xlarge	1 x 937 GB	NVMe SSD	62,500 / 50,000		✓
i4g.2xlarge	1 x 1875 GB	NVMe SSD	125,000 / 100,000		✓
i4g.4xlarge	1 x 3750 GB	NVMe SSD	250,000 / 200,000		✓



Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
i4g.8xlarge	2 x 3750 GB	NVMe SSD	500,000 / 400,000		✓
i4g.16xlarge	4 x 3750 GB	NVMe SSD	1,000,000 / 800,000		✓
<b>i4i</b>					
i4i.large	1 x 468 GB	NVMe SSD	50,000 / 27,500		✓
i4i.xlarge	1 x 937 GB	NVMe SSD	100,000 / 55,000		✓
i4i.2xlarge	1 x 1875 GB	NVMe SSD	200,000 / 110,000		✓
i4i.4xlarge	1 x 3750 GB	NVMe SSD	400,000 / 220,000		✓
i4i.8xlarge	2 x 3750 GB	NVMe SSD	800,000 / 440,000		✓
i4i.12xlarge	3 x 3750 GB	NVMe SSD	1,200,000 / 660,000		✓
i4i.16xlarge	4 x 3750 GB	NVMe SSD	1,600,000 / 880,000		✓
i4i.24xlarge	6 x 3750 GB	NVMe SSD	2,400,000 / 1,320,000		✓
i4i.32xlarge	8 x 3750 GB	NVMe SSD	3,200,000 / 1,760,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
i4i.metal	8 x 3750 GB	NVMe SSD	3,200,000 / 1,760,000		✓
<b>Im4gn</b>					
im4gn.large	1 x 937 GB	NVMe SSD	31,250 / 25,000		✓
im4gn.xlarge	1 x 1875 GB	NVMe SSD	62,500 / 50,000		✓
im4gn.2xlarge	1 x 3750 GB	NVMe SSD	125,000 / 100,000		✓
im4gn.4xlarge	1 x 7500 GB	NVMe SSD	250,000 / 200,000		✓
im4gn.8xlarge	2 x 7500 GB	NVMe SSD	500,000 / 400,000		✓
im4gn.16xlarge	4 x 7500 GB	NVMe SSD	1,000,000 / 800,000		✓
<b>Is4gen</b>					
is4gen.medium	1 x 937 GB	NVMe SSD	31,250 / 25,000		✓
is4gen.large	1 x 1875 GB	NVMe SSD	62,500 / 50,000		✓
is4gen.xlarge	1 x 3750 GB	NVMe SSD	125,000 / 100,000		✓
is4gen.2xlarge	1 x 7500 GB	NVMe SSD	250,000 / 200,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
is4gen.4xlarge	2 x 7500 GB	NVMe SSD	500,000 / 400,000		✓
is4gen.8xlarge	4 x 7500 GB	NVMe SSD	1,000,000 / 800,000		✓

<sup>1</sup> Volumes attached to certain instances suffer a first-write penalty unless initialized. For more information, see [Optimize disk performance for instance store volumes](#).

<sup>2</sup> For more information, see [Instance store volume TRIM support](#).

## Security specifications

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>D2</b>						
d2.xlarge	✓	X	X	X	X	X
d2.2xlarge	✓	X	X	X	X	X
d2.4xlarge	✓	X	X	X	X	X
d2.8xlarge	✓	X	X	X	X	X
<b>D3</b>						
d3.xlarge	✓	✓	✓	X	✓	✓
d3.2xlarge	✓	✓	✓	X	✓	✓
d3.4xlarge	✓	✓	✓	X	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
d3.8xlarge	✓	✓	✓	X	✓	✓
<b>D3en</b>						
d3en.xlarge	✓	✓	✓	X	✓	✓
d3en.2xlarge	✓	✓	✓	X	✓	✓
d3en.4xlarge	✓	✓	✓	X	✓	✓
d3en.6xlarge	✓	✓	✓	X	✓	✓
d3en.8xlarge	✓	✓	✓	X	✓	✓
d3en.12xlarge	✓	✓	✓	X	✓	✓
<b>H1</b>						
h1.2xlarge	✓	✓	X	X	X	X
h1.4xlarge	✓	✓	X	X	X	X
h1.8xlarge	✓	✓	X	X	X	X
h1.16xlarge	✓	✓	X	X	X	X
<b>I3</b>						
i3.large	✓	✓	X	X	X	X
i3.xlarge	✓	✓	X	X	X	X
i3.2xlarge	✓	✓	X	X	X	X
i3.4xlarge	✓	✓	X	X	X	X
i3.8xlarge	✓	✓	X	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
i3.16xlarge	✓	✓	✗	✗	✗	✗
i3.metal	✓	✓	✗	✗	✗	✗
<b>I3en</b>						
i3en.large	✓	✓	✓	✗	✓	✗
i3en.xlarge	✓	✓	✓	✗	✓	✓
i3en.2xlarge	✓	✓	✓	✗	✓	✓
i3en.3xlarge	✓	✓	✓	✗	✓	✓
i3en.6xlarge	✓	✓	✓	✗	✓	✓
i3en.12xlarge	✓	✓	✓	✗	✓	✓
i3en.24xlarge	✓	✓	✓	✗	✓	✓
i3en.metal	✓	✓	✓	✗	✗	✗
<b>I4g</b>						
i4g.large	✓	✓	✓	✗	✗	✓
i4g.xlarge	✓	✓	✓	✗	✗	✓
i4g.2xlarge	✓	✓	✓	✗	✗	✓
i4g.4xlarge	✓	✓	✓	✗	✗	✓
i4g.8xlarge	✓	✓	✓	✗	✗	✓
i4g.16xlarge	✓	✓	✓	✗	✗	✓
<b>I4i</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
i4i.large	✓	✓	✓	X	✓	X
i4i.xlarge	✓	✓	✓	X	✓	✓
i4i.2xlarge	✓	✓	✓	X	✓	✓
i4i.4xlarge	✓	✓	✓	X	✓	✓
i4i.8xlarge	✓	✓	✓	X	✓	✓
i4i.12xlarge	✓	✓	✓	X	✓	✓
i4i.16xlarge	✓	✓	✓	X	✓	✓
i4i.24xlarge	✓	✓	✓	X	✓	✓
i4i.32xlarge	✓	✓	✓	X	✓	✓
i4i.metal	✓	✓	✓	X	X	X
<b>Im4gn</b>						
im4gn.large	✓	✓	✓	X	X	X
im4gn.xlarge	✓	✓	✓	X	X	X
im4gn.2xlarge	✓	✓	✓	X	X	X
im4gn.4xlarge	✓	✓	✓	X	X	X
im4gn.8xlarge	✓	✓	✓	X	X	X
im4gn.16xlarge	✓	✓	✓	X	X	X
<b>Is4gen</b>						
is4gen.medium	✓	✓	✓	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
is4gen.large	✓	✓	✓	X	X	X
is4gen.xlarge	✓	✓	✓	X	X	X
is4gen.2xlarge	✓	✓	✓	X	X	X
is4gen.4xlarge	✓	✓	✓	X	X	X
is4gen.8xlarge	✓	✓	✓	X	X	X

## Accelerated computing instances

Accelerated computing instances use hardware accelerators, or co-processors, to perform functions, such as floating point number calculations, graphics processing, or data pattern matching, more efficiently than is possible in software running on CPUs.

### Contents

- [Available sizes](#)
- [Platform summary](#)
- [Performance specifications](#)
- [Network specifications](#)
- [Amazon EBS specifications](#)
- [Instance store specifications](#)
- [Security specifications](#)

## Available sizes

Instance type	Available sizes
DL1	d11.24xlarge
DL2q	d12q.24xlarge
F1	f1.2xlarge   f1.4xlarge   f1.16xlarge
G3	g3.4xlarge   g3.8xlarge   g3.16xlarge
G4ad	g4ad.xlarge   g4ad.2xlarge   g4ad.4xlarge   g4ad.8xlarge   g4ad.16xlarge
G4dn	g4dn.xlarge   g4dn.2xlarge   g4dn.4xlarge   g4dn.8xlarge   g4dn.12xlarge   g4dn.16xlarge   g4dn.metal
G5	g5.xlarge   g5.2xlarge   g5.4xlarge   g5.8xlarge   g5.12xlarge   g5.16xlarge   g5.24xlarge   g5.48xlarge
G5g	g5g.xlarge   g5g.2xlarge   g5g.4xlarge   g5g.8xlarge   g5g.16xlarge   g5g.metal
G6	g6.xlarge   g6.2xlarge   g6.4xlarge   g6.8xlarge   g6.12xlarge   g6.16xlarge   g6.24xlarge   g6.48xlarge
Gr6	gr6.4xlarge   gr6.8xlarge
Inf1	inf1.xlarge   inf1.2xlarge   inf1.6xlarge   inf1.24xlarge
Inf2	inf2.xlarge   inf2.8xlarge   inf2.24xlarge   inf2.48xlarge
P2	p2.xlarge   p2.8xlarge   p2.16xlarge
P3	p3.2xlarge   p3.8xlarge   p3.16xlarge
P3dn	p3dn.24xlarge



Instance type	Available sizes
P4d	p4d.24xlarge
P4de	p4de.24xlarge
P5	p5.48xlarge
Trn1	trn1.2xlarge   trn1.32xlarge
Trn1n	trn1n.32xlarge
VT1	vt1.3xlarge   vt1.6xlarge   vt1.24xlarge

## Platform summary

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
DL1	Nitro	Intel (x86_64)	X	✓	✓	X	Linux
DL2q	Nitro	Intel (x86_64)	X	X	X	X	Linux
F1	Xen	Intel (x86_64)	X	✓	✓	X	Linux
G3	Xen	Intel (x86_64)	X	✓	✓	X	Windows   Linux
G4ad	Nitro	AMD (x86_64)	X	✓	✓	X	Windows   Linux

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
G4dn	Nitro	Intel (x86_64)	✓	✓	✓	✗	Windows   Linux
G5	Nitro	AMD (x86_64)	✗	✓	✓	✗	Windows   Linux
G5g	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
G6	Nitro	AMD (x86_64)	✗	✓	✓	✗	Windows   Linux
Gr6	Nitro	AMD (x86_64)	✗	✗	✓	✗	Windows   Linux
Inf1	Nitro	Intel (x86_64)	✗	✓	✓	✗	Linux
Inf2	Nitro	AMD (x86_64)	✗	✓	✓	✗	Linux
P2	Xen	Intel (x86_64)	✗	✓	✓	✗	Windows   Linux
P3	Xen	Intel (x86_64)	✗	✓	✓	✗	Windows   Linux
P3dn	Nitro	Intel (x86_64)	✗	✗	✓	✗	Windows   Linux
P4d	Nitro	Intel (x86_64)	✗	✓	✓	✗	Linux

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
P4de	Nitro	Intel (x86_64)	X	✓	X	X	Linux
P5	Nitro	AMD (x86_64)	X	✓	✓	X	Linux
Trn1	Nitro	Intel (x86_64)	X	✓	✓	X	Linux
Trn1n	Nitro	Intel (x86_64)	X	X	✓	X	Linux
VT1	Nitro	Intel (x86_64)	X	X	✓	X	Linux

## Performance specifications

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>DL1</b>							
dl1.24xlarge	X	768.00	Intel Xeon P-8275CL	96	48	2	8 x GPU
<b>DL2q</b>							
dl2q.24xlarge	X	768.00	Intel Xeon Cascade Lake	96	48	2	8 x inference accelerator
<b>F1</b>							

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
f1.2xlarge	X	122.00	Intel Xeon E5-2686v4	8	4	2	1 x FPGA
f1.4xlarge	X	244.00	Intel Xeon E5-2686v4	16	8	2	2 x FPGA
f1.16xlarge	X	976.00	Intel Xeon E5-2686v4	64	32	2	8 x FPGA
<b>G3</b>							
g3.4xlarge	X	122.00	Intel Xeon E5-2686 v4	16	8	2	1 x GPU
g3.8xlarge	X	244.00	Intel Xeon E5-2686 v4	32	16	2	2 x GPU
g3.16xlarge	X	488.00	Intel Xeon E5-2686 v4	64	32	2	4 x GPU
<b>G4ad</b>							
g4ad.xlarge	X	16.00	2nd Gen AMD EPYC 7R32	4	2	2	1 x GPU
g4ad.2xlarge	X	32.00	2nd Gen AMD EPYC 7R32	8	4	2	1 x GPU
g4ad.4xlarge	X	64.00	2nd Gen AMD EPYC 7R32	16	8	2	1 x GPU
g4ad.8xlarge	X	128.00	2nd Gen AMD EPYC 7R32	32	16	2	2 x GPU
g4ad.16xlarge	X	256.00	2nd Gen AMD EPYC 7R32	64	32	2	4 x GPU

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>G4dn</b>							
g4dn.xlarge	X	16.00	Intel Xeon P-8259L	4	2	2	1 x GPU
g4dn.2xlarge	X	32.00	Intel Xeon P-8259L	8	4	2	1 x GPU
g4dn.4xlarge	X	64.00	Intel Xeon P-8259L	16	8	2	1 x GPU
g4dn.8xlarge	X	128.00	Intel Xeon P-8259L	32	16	2	1 x GPU
g4dn.12xlarge	X	192.00	Intel Xeon P-8259L	48	24	2	4 x GPU
g4dn.16xlarge	X	256.00	Intel Xeon P-8259L	64	32	2	1 x GPU
g4dn.metal	X	384.00	Intel Xeon P-8259L	96	48	2	8 x GPU
<b>G5</b>							
g5.xlarge	X	16.00	2nd Gen AMD EPYC 7R32	4	2	2	1 x GPU
g5.2xlarge	X	32.00	2nd Gen AMD EPYC 7R32	8	4	2	1 x GPU
g5.4xlarge	X	64.00	2nd Gen AMD EPYC 7R32	16	8	2	1 x GPU
g5.8xlarge	X	128.00	2nd Gen AMD EPYC 7R32	32	16	2	1 x GPU

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
g5.12xlarge	X	192.00	2nd Gen AMD EPYC 7R32	48	24	2	4 x GPU
g5.16xlarge	X	256.00	2nd Gen AMD EPYC 7R32	64	32	2	1 x GPU
g5.24xlarge	X	384.00	2nd Gen AMD EPYC 7R32	96	48	2	4 x GPU
g5.48xlarge	X	768.00	2nd Gen AMD EPYC 7R32	192	96	2	8 x GPU
<b>G5g</b>							
g5g.xlarge	X	8.00	Amazon Graviton2 Processor	4	4	1	1 x GPU
g5g.2xlarge	X	16.00	Amazon Graviton2 Processor	8	8	1	1 x GPU
g5g.4xlarge	X	32.00	Amazon Graviton2 Processor	16	16	1	1 x GPU
g5g.8xlarge	X	64.00	Amazon Graviton2 Processor	32	32	1	1 x GPU
g5g.16xlarge	X	128.00	Amazon Graviton2 Processor	64	64	1	2 x GPU

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
g5g.metal	X	128.00	Amazon Graviton2 Processor	64	64	1	2 x GPU
<b>G6</b>							
g6.xlarge	X	16.00	AMD EPYC 7R13	4	2	2	1 x GPU
g6.2xlarge	X	32.00	AMD EPYC 7R13	8	4	2	1 x GPU
g6.4xlarge	X	64.00	AMD EPYC 7R13	16	8	2	1 x GPU
g6.8xlarge	X	128.00	AMD EPYC 7R13	32	16	2	1 x GPU
g6.12xlarge	X	192.00	AMD EPYC 7R13	48	24	2	4 x GPU
g6.16xlarge	X	256.00	AMD EPYC 7R13	64	32	2	1 x GPU
g6.24xlarge	X	384.00	AMD EPYC 7R13	96	48	2	4 x GPU
g6.48xlarge	X	768.00	AMD EPYC 7R13	192	96	2	8 x GPU
<b>Gr6</b>							
gr6.4xlarge	X	128.00	AMD EPYC 7R13	16	8	2	1 x GPU

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
gr6.8xlarge	x	256.00	AMD EPYC 7R13	32	16	2	1 x GPU
<b>Inf1</b>							
inf1.xlarge	x	8.00	Intel Xeon P-8259L	4	2	2	1 x inference accelerator
inf1.2xlarge	x	16.00	Intel Xeon P-8259L	8	4	2	1 x inference accelerator
inf1.6xlarge	x	48.00	Intel Xeon P-8259L	24	12	2	4 x inference accelerator
inf1.24xlarge	x	192.00	Intel Xeon P-8259L	96	48	2	16 x inference accelerator
<b>Inf2</b>							
inf2.xlarge	x	16.00	AMD EPYC 7R13	4	2	2	1 x inference accelerator
inf2.8xlarge	x	128.00	AMD EPYC 7R13	32	16	2	1 x inference accelerator
inf2.24xlarge	x	384.00	AMD EPYC 7R13	96	48	2	6 x inference accelerator



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
inf2.48xlarge	X	768.00	AMD EPYC 7R13	192	96	2	12 x inference accelerator
<b>P2</b>							
p2.xlarge	X	61.00	Intel Xeon E5-2686v4	4	2	2	1 x GPU
p2.8xlarge	X	488.00	Intel Xeon E5-2686v4	32	16	2	8 x GPU
p2.16xlarge	X	732.00	Intel Xeon E5-2686 v4	64	32	2	16 x GPU
<b>P3</b>							
p3.2xlarge	X	61.00	Intel Xeon E5-2686 v4	8	4	2	1 x GPU
p3.8xlarge	X	244.00	Intel Xeon E5-2686 v4	32	16	2	4 x GPU
p3.16xlarge	X	488.00	Intel Xeon E5-2686 v4	64	32	2	8 x GPU
<b>P3dn</b>							
p3dn.24xlarge	X	768.00	Intel Xeon Platinum 8175	96	48	2	8 x GPU
<b>P4d</b>							
p4d.24xlarge	X	1152.00	Intel Xeon Platinum 8175	96	48	2	8 x GPU

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>P4de</b>							
p4de.24xlarge	x	1152.00	Intel Xeon Platinum 8175	96	48	2	8 x GPU
<b>P5</b>							
p5.48xlarge	x	2048.00	AMD EPYC 7R13	192	96	2	8 x GPU
<b>Trn1</b>							
trn1.2xlarge	x	32.00	Intel Xeon Ice Lake 8375C	8	4	2	x
trn1.32xlarge	x	512.00	Intel Xeon Ice Lake 8375C	128	64	2	x
<b>Trn1n</b>							
trn1n.32xlarge	x	512.00	Intel Xeon Ice Lake	128	64	2	x
<b>VT1</b>							
vt1.3xlarge	x	24.00	Intel Cascade Lake P-8259CL	12	6	2	x
vt1.6xlarge	x	48.00	Intel Cascade Lake P-8259CL	24	12	2	x
vt1.24xlarge	x	192.00	Intel Cascade Lake P-8259CL	96	48	2	x

**Note**

**trn1n.32xlarge** instances feature 16 Trainium Accelerators.

**Trn1** instances feature the following number of Trainium Accelerators.

- trn1.2xlarge — 1
- trn1.32xlarge — 16

**VT1** instances feature the following number of U30 Accelerators.

- vt1.3xlarge — 1
- vt1.6xlarge — 2
- vt1.24xlarge — 16

## Network specifications

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>DL1</b>								
dl1.24xlarge	4x 100 Gigabit	✓	✓	x	4	60	50	✓
<b>DL2q</b>								
dl2q.24xlarge	100 Gigabit	✓	✓	x	1	15	50	✓
<b>F1</b>								
f1.2xlarge <sup>1</sup>	Up to 10 Gigabit	x	✓	x	1	4	15	✓
f1.4xlarge <sup>1</sup>	Up to 10 Gigabit	x	✓	x	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
f1.16xlarge	25 Gigabit	x	✓	x	1	8	50	✓
<b>G3</b>								
g3.4xlarge <sup>1</sup>	Up to 10 Gigabit	x	✓	x	1	8	30	✓
g3.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
g3.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
<b>G4ad</b>								
g4ad.xlarge <sup>1</sup>	2.0 / 10.0	x	✓	x	1	2	4	✓
g4ad.2xlarge <sup>1</sup>	4.167 / 10.0	x	✓	x	1	2	4	✓
g4ad.4xlarge <sup>1</sup>	8.333 / 10.0	x	✓	x	1	3	10	✓
g4ad.8xlarge	15 Gigabit	x	✓	x	1	4	15	✓
g4ad.16xlarge	25 Gigabit	x	✓	x	1	8	30	✓
<b>G4dn</b>								
g4dn.xlarge <sup>1</sup>	5.0 / 25.0	x	✓	x	1	3	10	✓
g4dn.2xlarge <sub>1</sub>	10.0 / 25.0	x	✓	x	1	3	10	✓
g4dn.4xlarge <sub>1</sub>	20.0 / 25.0	x	✓	x	1	3	10	✓
g4dn.8xlarge	50 Gigabit	✓	✓	x	1	4	15	✓
g4dn.12xlarge	50 Gigabit	✓	✓	x	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
g4dn.16xlarge	50 Gigabit	✓	✓	✗	1	4	15	✓
g4dn.metal	100 Gigabit	✓	✓	✗	1	15	50	✓
<b>G5</b>								
g5.xlarge <sup>1</sup>	2.5 / 10.0	✗	✓	✗	1	4	15	✓
g5.2xlarge <sup>1</sup>	5.0 / 10.0	✗	✓	✗	1	4	15	✓
g5.4xlarge <sup>1</sup>	10.0 / 25.0	✗	✓	✗	1	8	30	✓
g5.8xlarge	25 Gigabit	✓	✓	✗	1	8	30	✓
g5.12xlarge	40 Gigabit	✓	✓	✗	1	15	50	✓
g5.16xlarge	25 Gigabit	✓	✓	✗	1	8	30	✓
g5.24xlarge	50 Gigabit	✓	✓	✗	1	15	50	✓
g5.48xlarge	100 Gigabit	✓	✓	✗	1	7	50	✓
<b>G5g</b>								
g5g.xlarge <sup>1</sup>	1.25 / 10.0	✗	✓	✗	1	4	15	✓
g5g.2xlarge <sup>1</sup>	2.5 / 10.0	✗	✓	✗	1	4	15	✓
g5g.4xlarge <sup>1</sup>	5.0 / 10.0	✗	✓	✗	1	8	30	✓
g5g.8xlarge	12 Gigabit	✗	✓	✗	1	8	30	✓
g5g.16xlarge	25 Gigabit	✗	✓	✗	1	15	50	✓
g5g.metal	25 Gigabit	✗	✓	✗	1	15	50	✓
<b>G6</b>								

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
g6.xlarge <sup>1</sup>	2.5 / 10.0	✗	✓	✗	1	4	15	✓
g6.2xlarge <sup>1</sup>	5.0 / 10.0	✗	✓	✗	1	4	15	✓
g6.4xlarge <sup>1</sup>	10.0 / 25.0	✗	✓	✗	1	8	30	✓
g6.8xlarge	25 Gigabit	✓	✓	✗	1	8	30	✓
g6.12xlarge	40 Gigabit	✓	✓	✗	1	8	30	✓
g6.16xlarge	25 Gigabit	✓	✓	✗	1	15	50	✓
g6.24xlarge	50 Gigabit	✓	✓	✗	1	15	50	✓
g6.48xlarge	100 Gigabit	✓	✓	✓	1	15	50	✓
<b>Gr6</b>								
gr6.4xlarge <sup>1</sup>	10.0 / 25.0	✗	✓	✗	1	8	30	✓
gr6.8xlarge	25 Gigabit	✓	✓	✗	1	8	30	✓
<b>Inf1</b>								
inf1.xlarge <sup>1</sup>	5.0 / 25.0	✗	✓	✗	1	4	10	✓
inf1.2xlarge <sup>1</sup>	5.0 / 25.0	✗	✓	✗	1	4	10	✓
inf1.6xlarge	25 Gigabit	✗	✓	✗	1	8	30	✓
inf1.24xlarge	100 Gigabit	✓	✓	✗	1	11	30	✓
<b>Inf2</b>								
inf2.xlarge <sup>1</sup>	2.083 / 15.0	✗	✓	✗	1	4	15	✓
inf2.8xlarge <sup>1</sup>	16.667 / 25.0	✗	✓	✗	1	8	30	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
inf2.24xlarge	50 Gigabit	x	✓	x	1	15	50	✓
inf2.48xlarge	100 Gigabit	x	✓	x	1	15	50	✓
<b>P2</b>								
p2.xlarge	High	x	✓	x	1	4	15	✓
p2.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
p2.16xlarge	25 Gigabit	x	✓	x	1	8	30	✓
<b>P3</b>								
p3.2xlarge <sup>1</sup>	Up to 10 Gigabit	x	✓	x	1	4	15	✓
p3.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
p3.16xlarge	25 Gigabit	x	✓	x	1	8	30	✓
<b>P3dn</b>								
p3dn.24xlarge	100 Gigabit	✓	✓	x	1	15	50	✓
<b>P4d</b>								
p4d.24xlarge	4x 100 Gigabit	✓	✓	x	4	60	50	✓
<b>P4de</b>								
p4de.24xlarge	4x 100 Gigabit	✓	✓	x	4	60	50	✓
<b>P5</b>								

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
p5.48xlarge	3200 Gigabit	✓	✓	✗	32	64	50	✓
<b>Trn1</b>								
trn1.2xlarge <sup>1</sup>	3.125 / 12.5	✗	✓	✗	1	4	15	✓
trn1.32xlarge	8x 100 Gigabit	✓	✓	✗	8	40	50	✓
<b>Trn1n</b>								
trn1n.32xlarge	16x 100 Gigabit	✓	✓	✗	16	80	50	✓
<b>VT1</b>								
vt1.3xlarge	3.12 Gigabit	✗	✓	✗	1	4	15	✓
vt1.6xlarge	6.25 Gigabit	✗	✓	✗	1	8	30	✓
vt1.24xlarge	25 Gigabit	✓	✓	✗	1	15	50	✓

**Note**

<sup>1</sup> These instances have a baseline bandwidth and can use a network I/O credit mechanism to burst beyond their baseline bandwidth on a best effort basis. Other instances types can sustain their maximum performance indefinitely. For more information, see [instance network bandwidth](#).



## Amazon EBS specifications

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>DL1</b>					
dl1.24xlarge	19000.00	2375.00	80000.00	✓	default
<b>DL2q</b>					
dl2q.24xlarge	19000.00	2375.00	80000.00	✓	default
<b>F1</b>					
f1.2xlarge	1700.00	212.50	12000.00	✗	default
f1.4xlarge	3500.00	437.50	44000.00	✗	default
f1.16xlarge	14000.00	1750.00	75000.00	✗	default
<b>G3</b>					
g3.4xlarge	3500.00	437.50	20000.00	✗	default
g3.8xlarge	7000.00	875.00	40000.00	✗	default
g3.16xlarge	14000.00	1750.00	80000.00	✗	default
<b>G4ad</b>					
g4ad.xlarge <sup>1</sup>	400.00 / 3170.00	50.00 / 396.25	1700.00 / 13333.00	✓	default
g4ad.2xlarge <sup>1</sup>	800.00 / 3170.00	100.00 / 396.25	3400.00 / 13333.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
g4ad.4xlarge <sup>1</sup>	1580.00 / 3170.00	197.50 / 396.25	6700.00 / 13333.00	✓	default
g4ad.8xlarge	3170.00	396.25	13333.00	✓	default
g4ad.16xlarge	6300.00	787.50	26667.00	✓	default
<b>G4dn</b>					
g4dn.xlarge <sup>1</sup>	950.00 / 3500.00	118.75 / 437.50	3000.00 / 20000.00	✓	default
g4dn.2xlarge <sup>1</sup>	1150.00 / 3500.00	143.75 / 437.50	6000.00 / 20000.00	✓	default
g4dn.4xlarge	4750.00	593.75	20000.00	✓	default
g4dn.8xlarge	9500.00	1187.50	40000.00	✓	default
g4dn.12xlarge	9500.00	1187.50	40000.00	✓	default
g4dn.16xlarge	9500.00	1187.50	40000.00	✓	default
g4dn.metal	19000.00	2375.00	80000.00	✓	default
<b>G5</b>					
g5.xlarge <sup>1</sup>	700.00 / 3500.00	87.50 / 437.50	3000.00 / 15000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
g5.2xlarge <sup>1</sup>	850.00 / 3500.00	106.25 / 437.50	3500.00 / 15000.00	✓	default
g5.4xlarge	4750.00	593.75	20000.00	✓	default
g5.8xlarge	16000.00	2000.00	65000.00	✓	default
g5.12xlarge	16000.00	2000.00	65000.00	✓	default
g5.16xlarge	16000.00	2000.00	65000.00	✓	default
g5.24xlarge	19000.00	2375.00	80000.00	✓	default
g5.48xlarge	19000.00	2375.00	80000.00	✓	default
<b>G5g</b>					
g5g.xlarge <sup>1</sup>	1188.00 / 4750.00	148.50 / 593.75	6000.00 / 20000.00	✓	default
g5g.2xlarge <sup>1</sup>	2375.00 / 4750.00	296.88 / 593.75	12000.00 / 20000.00	✓	default
g5g.4xlarge	4750.00	593.75	20000.00	✓	default
g5g.8xlarge	9500.00	1187.50	40000.00	✓	default
g5g.16xlarge	19000.00	2375.00	80000.00	✓	default
g5g.metal	19000.00	2375.00	80000.00	✓	default
<b>G6</b>					
g6.xlarge <sup>1</sup>	1000.00 / 5000.00	125.00 / 625.00	4000.00 / 20000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
g6.2xlarge <sup>1</sup>	2000.00 / 5000.00	250.00 / 625.00	8000.00 / 20000.00	✓	default
g6.4xlarge	8000.00	1000.00	32000.00	✓	default
g6.8xlarge	16000.00	2000.00	64000.00	✓	default
g6.12xlarge	20000.00	2500.00	80000.00	✓	default
g6.16xlarge	20000.00	2500.00	80000.00	✓	default
g6.24xlarge	30000.00	3750.00	120000.00	✓	default
g6.48xlarge	60000.00	7500.00	240000.00	✓	default
<b>Gr6</b>					
gr6.4xlarge	8000.00	1000.00	32000.00	✓	default
gr6.8xlarge	16000.00	2000.00	64000.00	✓	default
<b>Inf1</b>					
inf1.xlarge <sup>1</sup>	1190.00 / 4750.00	148.75 / 593.75	4000.00 / 20000.00	✓	default
inf1.2xlarge <sup>1</sup>	1190.00 / 4750.00	148.75 / 593.75	6000.00 / 20000.00	✓	default
inf1.6xlarge	4750.00	593.75	20000.00	✓	default
inf1.24xlarge	19000.00	2375.00	80000.00	✓	default
<b>Inf2</b>					

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
inf2.xlarge <sup>1</sup>	1250.00 / 10000.00	156.25 / 1250.00	6000.00 / 40000.00	✓	default
inf2.8xlarge	10000.00	1250.00	40000.00	✓	default
inf2.24xlarge	30000.00	3750.00	120000.00	✓	default
inf2.48xlarge	60000.00	7500.00	240000.00	✓	default
<b>P2</b>					
p2.xlarge	750.00	93.75	6000.00	✗	default
p2.8xlarge	5000.00	625.00	32500.00	✗	default
p2.16xlarge	10000.00	1250.00	65000.00	✗	default
<b>P3</b>					
p3.2xlarge	1750.00	218.75	10000.00	✗	default
p3.8xlarge	7000.00	875.00	40000.00	✗	default
p3.16xlarge	14000.00	1750.00	80000.00	✗	default
<b>P3dn</b>					
p3dn.24xlarge	19000.00	2375.00	80000.00	✓	default
<b>P4d</b>					
p4d.24xlarge	19000.00	2375.00	80000.00	✓	default
<b>P4de</b>					

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
p4de.24xlarge	19000.00	2375.00	80000.00	✓	default
<b>P5</b>					
p5.48xlarge	80000.00	10000.00	260000.00	✓	default
<b>Trn1</b>					
trn1.2xlarge <sup>1</sup>	5000.00 / 20000.00	625.00 / 2500.00	16250.00 / 65000.00	✓	default
trn1.32xlarge	80000.00	10000.00	260000.00	✓	default
<b>Trn1n</b>					
trn1n.32xlarge	80000.00	10000.00	260000.00	✓	default
<b>VT1</b>					
vt1.3xlarge <sup>1</sup>	2375.00 / 4750.00	296.88 / 593.75	10000.00 / 20000.00	✓	default
vt1.6xlarge	4750.00	593.75	20000.00	✓	default
vt1.24xlarge	19000.00	2375.00	80000.00	✓	default

**Note**

<sup>1</sup> These instances can support maximum performance for 30 minutes at least once every 24 hours, after which they revert to their baseline performance. Other instances can sustain

the maximum performance indefinitely. If your workload requires sustained maximum performance for longer than 30 minutes, use one of these instances.

<sup>2</sup> default indicates that instances are enabled for EBS optimization by default.

supported indicates that instances can optionally be enabled for EBS optimization. For more information, see [Amazon EBS-optimized instances](#).

## Instance store specifications

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
<b>DL1</b>					
dl1.24xlarge	4 x 1000 GB	NVMe SSD	1,000,000 / 800,000		✓
<b>F1</b>					
f1.2xlarge	1 x 470 GB	NVMe SSD			✓
f1.4xlarge	1 x 940 GB	NVMe SSD			✓
f1.16xlarge	4 x 940 GB	NVMe SSD			✓
<b>G4ad</b>					
g4ad.xlarge	1 x 150 GB	NVMe SSD	10,417 / 8,333		✓
g4ad.2xlarge	1 x 300 GB	NVMe SSD	20,833 / 16,667		✓
g4ad.4xlarge	1 x 600 GB	NVMe SSD	41,667 / 33,333		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
g4ad.8xlarge	1 x 1200 GB	NVMe SSD	83,333 / 66,667		✓
g4ad.16xlarge	2 x 1200 GB	NVMe SSD	166,666 / 133,332		✓

**G4dn**

g4dn.xlarge	1 x 125 GB	NVMe SSD	42,500 / 32,500		✓
g4dn.2xlarge	1 x 225 GB	NVMe SSD	42,500 / 32,500		✓
g4dn.4xlarge	1 x 225 GB	NVMe SSD	85,000 / 65,000		✓
g4dn.8xlarge	1 x 900 GB	NVMe SSD	250,000 / 200,000		✓
g4dn.12xlarge	1 x 900 GB	NVMe SSD	250,000 / 200,000		✓
g4dn.16xlarge	1 x 900 GB	NVMe SSD	250,000 / 200,000		✓
g4dn.metal	2 x 900 GB	NVMe SSD	500,000 / 400,000		✓

**G5**

g5.xlarge	1 x 250 GB	NVMe SSD	40,625 / 20,313		✓
g5.2xlarge	1 x 450 GB	NVMe SSD	40,625 / 20,313		✓



Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
g5.4xlarge	1 x 600 GB	NVMe SSD	125,000 / 62,500		✓
g5.8xlarge	1 x 900 GB	NVMe SSD	250,000 / 125,000		✓
g5.12xlarge	1 x 3800 GB	NVMe SSD	312,500 / 156,250		✓
g5.16xlarge	1 x 1900 GB	NVMe SSD	250,000 / 125,000		✓
g5.24xlarge	1 x 3800 GB	NVMe SSD	312,500 / 156,250		✓
g5.48xlarge	2 x 3800 GB	NVMe SSD	625,000 / 312,500		✓
<b>G6</b>					
g6.xlarge	1 x 250 GB	NVMe SSD	40,625 / 20,000		✓
g6.2xlarge	1 x 450 GB	NVMe SSD	40,625 / 20,000		✓
g6.4xlarge	1 x 600 GB	NVMe SSD	125,000 / 40,000		✓
g6.8xlarge	2 x 450 GB	NVMe SSD	250,000 / 80,000		✓
g6.12xlarge	4 x 3800 GB	NVMe SSD	312,500 / 125,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
g6.16xlarge	2 x 1900 GB	NVMe SSD	250,000 / 80,000		✓
g6.24xlarge	4 x 3800 GB	NVMe SSD	312,500 / 156,248		✓
g6.48xlarge	8 x 7600 GB	NVMe SSD	625,000 / 312,496		✓
<b>Gr6</b>					
gr6.4xlarge	1 x 600 GB	NVMe SSD	125,000 / 40,000		✓
gr6.8xlarge	2 x 450 GB	NVMe SSD	250,000 / 80,000		✓
<b>P3dn</b>					
p3dn.24xlarge	2 x 900 GB	NVMe SSD	700,000 / 340,000		✓
<b>P4d</b>					
p4d.24xlarge	8 x 1000 GB	NVMe SSD	2,000,000 / 1,600,000		✓
<b>P4de</b>					
p4de.24xlarge	8 x 1000 GB	NVMe SSD	2,000,000 / 1,600,000		✓
<b>P5</b>					
p5.48xlarge	8 x 3800 GB	NVMe SSD	4,400,000 / 2,200,000		✓

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
<b>Trn1</b>					
trn1.2xlarge	1 x 474 GB	NVMe SSD	107,500 / 45,000		✓
trn1.32xlarge	4 x 1900 GB	NVMe SSD	1,720,000 / 720,000		✓
<b>Trn1n</b>					
trn1n.32xlarge	4 x 1900 GB	NVMe SSD	1,720,000 / 720,000		✓

<sup>1</sup> Volumes attached to certain instances suffer a first-write penalty unless initialized. For more information, see [Optimize disk performance for instance store volumes](#).

<sup>2</sup> For more information, see [Instance store volume TRIM support](#).

## Security specifications

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>DL1</b>						
dl1.24xlarge	✓	✓	✓	x	x	✓
<b>DL2q</b>						
dl2q.24xlarge	✓	Instance store not supported	✓	x	x	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>F1</b>						
f1.2xlarge	✓	✓	X	X	X	X
f1.4xlarge	✓	✓	X	X	X	X
f1.16xlarge	✓	✓	X	X	X	X
<b>G3</b>						
g3.4xlarge	✓	Instance store not supported	X	X	X	X
g3.8xlarge	✓	Instance store not supported	X	X	X	X
g3.16xlarge	✓	Instance store not supported	X	X	X	X
<b>G4ad</b>						
g4ad.xlarge	✓	✓	✓	X	X	X
g4ad.2xlarge	✓	✓	✓	X	X	X
g4ad.4xlarge	✓	✓	✓	X	X	X
g4ad.8xlarge	✓	✓	✓	X	X	X
g4ad.16xlarge	✓	✓	✓	X	X	X
<b>G4dn</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
g4dn.xlarge	✓	✓	✓	X	✓	✓
g4dn.2xlarge	✓	✓	✓	X	✓	✓
g4dn.4xlarge	✓	✓	✓	X	✓	✓
g4dn.8xlarge	✓	✓	✓	X	✓	✓
g4dn.12xlarge	✓	✓	✓	X	✓	✓
g4dn.16xlarge	✓	✓	✓	X	✓	✓
g4dn.metal	✓	✓	✓	X	X	X
<b>G5</b>						
g5.xlarge	✓	✓	✓	X	✓	✓
g5.2xlarge	✓	✓	✓	X	✓	✓
g5.4xlarge	✓	✓	✓	X	✓	✓
g5.8xlarge	✓	✓	✓	X	✓	✓
g5.12xlarge	✓	✓	✓	X	✓	✓
g5.16xlarge	✓	✓	✓	X	✓	✓
g5.24xlarge	✓	✓	✓	X	✓	✓
g5.48xlarge	✓	✓	✓	X	✓	✓
<b>G5g</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
g5g.xlarge	✓	Instance store not supported	X	X	X	X
g5g.2xlarge	✓	Instance store not supported	X	X	X	X
g5g.4xlarge	✓	Instance store not supported	X	X	X	X
g5g.8xlarge	✓	Instance store not supported	X	X	X	X
g5g.16xlarge	✓	Instance store not supported	X	X	X	X
g5g.metal	✓	Instance store not supported	X	X	X	X
<b>G6</b>						
g6.xlarge	✓	✓	✓	X	✓	✓
g6.2xlarge	✓	✓	✓	X	✓	✓
g6.4xlarge	✓	✓	✓	X	✓	✓
g6.8xlarge	✓	✓	✓	X	✓	✓

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
g6.12xlarge	✓	✓	✓	X	✓	✓
g6.16xlarge	✓	✓	✓	X	✓	✓
g6.24xlarge	✓	✓	✓	X	✓	✓
g6.48xlarge	✓	✓	✓	X	✓	✓
<b>Gr6</b>						
gr6.4xlarge	✓	✓	✓	X	✓	✓
gr6.8xlarge	✓	✓	✓	X	✓	✓
<b>Inf1</b>						
inf1.xlarge	✓	Instance store not supported	✓	X	✓	✓
inf1.2xlarge	✓	Instance store not supported	✓	X	✓	✓
inf1.6xlarge	✓	Instance store not supported	✓	X	✓	✓
inf1.24xlarge	✓	Instance store not supported	✓	X	✓	✓
<b>Inf2</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
inf2.xlarge	✓	Instance store not supported	✓	✗	✓	✓
inf2.8xlarge	✓	Instance store not supported	✓	✗	✓	✓
inf2.24xlarge	✓	Instance store not supported	✓	✗	✓	✓
inf2.48xlarge	✓	Instance store not supported	✓	✗	✓	✓
<b>P2</b>						
p2.xlarge	✓	Instance store not supported	✗	✗	✗	✗
p2.8xlarge	✓	Instance store not supported	✗	✗	✗	✗
p2.16xlarge	✓	Instance store not supported	✗	✗	✗	✗
<b>P3</b>						



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
p3.2xlarge	✓	Instance store not supported	X	X	X	X
p3.8xlarge	✓	Instance store not supported	X	X	X	X
p3.16xlarge	✓	Instance store not supported	X	X	X	X
<b>P3dn</b>						
p3dn.24xlarge	✓	✓	✓	X	X	✓
<b>P4d</b>						
p4d.24xlarge	✓	✓	✓	X	X	✓
<b>P4de</b>						
p4de.24xlarge	✓	✓	✓	X	X	✓
<b>P5</b>						
p5.48xlarge	✓	✓	✓	X	X	✓
<b>Trn1</b>						
trn1.2xlarge	✓	✓	✓	X	X	X
trn1.32xlarge	✓	✓	✓	X	X	X
<b>Trn1n</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
trn1n.32xlarge	✓	✓	✓	X	X	X
<b>VT1</b>						
vt1.3xlarge	✓	Instance store not supported	✓	X	X	X
vt1.6xlarge	✓	Instance store not supported	✓	X	X	X
vt1.24xlarge	✓	Instance store not supported	✓	X	X	X

## High-performance computing instances

High-performance computing instances are purpose built to offer the best price performance for running HPC workloads at scale on Amazon. These instances are ideal for applications that benefit from high-performance processors, such as large, complex simulations and deep learning workloads.

### Contents

- [Available sizes](#)
- [Platform summary](#)
- [Performance specifications](#)
- [Network specifications](#)
- [Amazon EBS specifications](#)
- [Instance store specifications](#)
- [Security specifications](#)

## Available sizes

Instance type	Available sizes
Hpc6a	hpc6a.48xlarge
Hpc6id	hpc6id.32xlarge
Hpc7a	hpc7a.12xlarge   hpc7a.24xlarge   hpc7a.48xlarge   hpc7a.96xlarge
Hpc7g	hpc7g.4xlarge   hpc7g.8xlarge   hpc7g.16xlarge

## Platform summary

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
Hpc6a	Nitro	AMD (x86_64)	X	X	X	X	Linux
Hpc6id	Nitro	Intel (x86_64)	X	X	X	X	Windows   Linux
Hpc7a	Nitro	AMD (x86_64)	X	X	X	X	Windows   Linux
Hpc7g	Nitro	Amazon Graviton (arm64)	X	X	X	X	Linux

## Performance specifications

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>Hpc6a</b>							
hpc6a.48xlarge	x	384.00	AMD EPYC 7R13	96	96	1	x
<b>Hpc6id</b>							
hpc6id.32xlarge	x	1024.00	Intel Xeon Ice Lake	64	64	1	x
<b>Hpc7a</b>							
hpc7a.12xlarge	x	768.00	AMD EPYC 9R14	24	24	1	x
hpc7a.24xlarge	x	768.00	AMD EPYC 9R14	48	48	1	x
hpc7a.48xlarge	x	768.00	AMD EPYC 9R14	96	96	1	x
hpc7a.96xlarge	x	768.00	AMD EPYC 9R14	192	192	1	x
<b>Hpc7g</b>							
hpc7g.4xlarge	x	128.00	Amazon Graviton3E Processor	16	16	1	x
hpc7g.8xlarge	x	128.00	Amazon Graviton3E Processor	32	32	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
hpc7g.16xlarge	x	128.00	Amazon Graviton3E Processor	64	64	1	x

## Network specifications

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>Hpc6a</b>								
hpc6a.48xlarge	100 Gigabit	✓	✓	x	1	2	50	✓
<b>Hpc6id</b>								
hpc6id.32xlarge	200 Gigabit	✓	✓	x	2	2	50	✓
<b>Hpc7a</b>								
hpc7a.12xlarge	300 Gigabit	✓	✓	x	2	4	50	✓
hpc7a.24xlarge	300 Gigabit	✓	✓	x	2	4	50	✓
hpc7a.48xlarge	300 Gigabit	✓	✓	x	2	4	50	✓
hpc7a.96xlarge	300 Gigabit	✓	✓	x	2	4	50	✓

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>Hpc7g</b>								
hpc7g.4xlarge	200 Gigabit	✓	✓	✗	1	4	50	✓
hpc7g.8xlarge	200 Gigabit	✓	✓	✗	1	4	50	✓
hpc7g.16xlarge	200 Gigabit	✓	✓	✗	1	4	50	✓

## Amazon EBS specifications

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>Hpc6a</b>					
hpc6a.48xlarge <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11000.00	✓	default
<b>Hpc6id</b>					
hpc6id.32xlarge <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11000.00	✓	default
<b>Hpc7a</b>					
hpc7a.12xlarge <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11000.00	✓	default

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
hpc7a.24xlarge <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11000.00	✓	default
hpc7a.48xlarge <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11000.00	✓	default
hpc7a.96xlarge <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11000.00	✓	default
<b>Hpc7g</b>					
hpc7g.4xlarge <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11000.00	✓	default
hpc7g.8xlarge <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11000.00	✓	default
hpc7g.16xlarge <sup>1</sup>	87.00 / 2085.00	10.88 / 260.62	500.00 / 11000.00	✓	default

**Note**

<sup>1</sup> These instances can support maximum performance for 30 minutes at least once every 24 hours, after which they revert to their baseline performance. Other instances can sustain the maximum performance indefinitely. If your workload requires sustained maximum performance for longer than 30 minutes, use one of these instances.

<sup>2</sup> default indicates that instances are enabled for EBS optimization by default. supported indicates that instances can optionally be enabled for EBS optimization. For more information, see [Amazon EBS-optimized instances](#).

## Instance store specifications

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
<b>Hpc6id</b>					
hpc6id.32xlarge	4 x 3800 GB	NVMe SSD	2,146,664 / 1,073,336		✓

<sup>1</sup> Volumes attached to certain instances suffer a first-write penalty unless initialized. For more information, see [Optimize disk performance for instance store volumes](#).

<sup>2</sup> For more information, see [Instance store volume TRIM support](#).

## Security specifications

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>Hpc6a</b>						
hpc6a.48xlarge	✓	Instance store not supported	✓	X	✓	X
<b>Hpc6id</b>						
hpc6id.32xlarge	✓	✓	✓	X	✓	X
<b>Hpc7a</b>						
hpc7a.12xlarge	✓	Instance store not supported	✓	X	X	X



Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
hpc7a.24xlarge	✓	Instance store not supported	✓	X	X	X
hpc7a.48xlarge	✓	Instance store not supported	✓	X	X	X
hpc7a.96xlarge	✓	Instance store not supported	✓	X	X	X
<b>Hpc7g</b>						
hpc7g.4xlarge	✓	Instance store not supported	✓	X	X	X
hpc7g.8xlarge	✓	Instance store not supported	✓	X	X	X
hpc7g.16xlarge	✓	Instance store not supported	✓	X	X	X

## Previous generation instances

Amazon offers previous generation instance types for users who have optimized their applications around them and have yet to upgrade. We encourage you to use current generation instance types to get the best performance, but we continue to support the following previous generation instance types.

## Contents

- [Available sizes](#)
- [Platform summary](#)
- [Performance specifications](#)
- [Network specifications](#)
- [Amazon EBS specifications](#)
- [Instance store specifications](#)
- [Security specifications](#)

## Available sizes

Instance type	Available sizes
A1	a1.medium   a1.large   a1.xlarge   a1.2xlarge   a1.4xlarge   a1.metal
C1	c1.medium   c1.xlarge
C3	c3.large   c3.xlarge   c3.2xlarge   c3.4xlarge   c3.8xlarge
C4	c4.large   c4.xlarge   c4.2xlarge   c4.4xlarge   c4.8xlarge
I2	i2.xlarge   i2.2xlarge   i2.4xlarge   i2.8xlarge
M1	m1.small   m1.medium   m1.large   m1.xlarge
M2	m2.xlarge   m2.2xlarge   m2.4xlarge
M3	m3.medium   m3.large   m3.xlarge   m3.2xlarge
M4	m4.large   m4.xlarge   m4.2xlarge   m4.4xlarge   m4.10xlarge   m4.16xlarge
R3	r3.large   r3.xlarge   r3.2xlarge   r3.4xlarge   r3.8xlarge

Instance type	Available sizes
R4	r4.large   r4.xlarge   r4.2xlarge   r4.4xlarge   r4.8xlarge   r4.16xlarge
T1	t1.micro

## Platform summary

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
A1	Nitro	Amazon Graviton (arm64)	✓	✓	✓	✗	Linux
C1	Xen	Intel (x86_64)	✗	✗	✓	✗	Windows   Linux
C3	Xen	Intel (x86_64)	✗	✓	✓	✓	Windows   Linux
C4	Xen	Intel (x86_64)	✗	✓	✓	✓	Windows   Linux
I2	Xen	Intel (x86_64)	✗	✓	✓	✗	Windows   Linux
M1	Xen	Intel (x86_64)	✗	✗	✓	✗	Windows   Linux
M2	Xen	Intel (x86_64)	✗	✗	✓	✗	Windows   Linux

Instance type	Hypervisor	Processor type (architecture)	Metal instances available	Dedicated Hosts support	Spot support	Hibernation support	Supported operating systems
M3	Xen	Intel (x86_64)	x	✓	✓	✓	Windows   Linux
M4	Xen	Intel (x86_64)	x	✓	✓	✓	Windows   Linux
R3	Xen	Intel (x86_64)	x	✓	✓	✓	Windows   Linux
R4	Xen	Intel (x86_64)	x	✓	✓	✓	Windows   Linux
T1	Xen	Intel (i386)	x	x	✓	x	Windows   Linux

## Performance specifications

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>A1</b>							
a1.medium	x	2.00	Amazon Graviton Processor	1	1	1	x
a1.large	x	4.00	Amazon Graviton Processor	2	2	1	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
a1.xlarge	X	8.00	Amazon Graviton Processor	4	4	1	X
a1.2xlarge	X	16.00	Amazon Graviton Processor	8	8	1	X
a1.4xlarge	X	32.00	Amazon Graviton Processor	16	16	1	X
a1.metal	X	32.00	Amazon Graviton Processor	16	16	1	X
<b>C1</b>							
c1.medium	X	1.70	Intel Xeon Family	2	2	1	X
c1.xlarge	X	7.00	Intel Xeon Family	8	8	1	X
<b>C3</b>							
c3.large	X	3.75	Intel Xeon E5-2680v2	2	1	2	X
c3.xlarge	X	7.50	Intel Xeon E5-2680v2	4	2	2	X
c3.2xlarge	X	15.00	Intel Xeon E5-2680v2	8	4	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
c3.4xlarge	X	30.00	Intel Xeon E5-2680v2	16	8	2	X
c3.8xlarge	X	60.00	Intel Xeon E5-2680v2	32	16	2	X
<b>C4</b>							
c4.large	X	3.75	Intel Xeon E5-2666v3	2	1	2	X
c4.xlarge	X	7.50	Intel Xeon E5-2666v3	4	2	2	X
c4.2xlarge	X	15.00	Intel Xeon E5-2666v3	8	4	2	X
c4.4xlarge	X	30.00	Intel Xeon E5-2666v3	16	8	2	X
c4.8xlarge	X	60.00	Intel Xeon E5-2666v3	36	18	2	X
<b>I2</b>							
i2.xlarge	X	30.50	Intel Xeon E5-2670v2	4	2	2	X
i2.2xlarge	X	61.00	Intel Xeon E5-2670v2	8	4	2	X
i2.4xlarge	X	122.00	Intel Xeon E5-2670v2	16	8	2	X
i2.8xlarge	X	244.00	Intel Xeon E5-2670v2	32	16	2	X

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
<b>M1</b>							
m1.small	x	1.70	Intel Xeon Family	1	1	1	x
m1.medium	x	3.70	Intel Xeon Family	1	1	1	x
m1.large	x	7.50	Intel Xeon Family	2	2	1	x
m1.xlarge	x	15.00	Intel Xeon Family	4	4	1	x
<b>M2</b>							
m2.xlarge	x	17.10	Intel Xeon Family	2	2	1	x
m2.2xlarge	x	34.20	Intel Xeon Family	4	4	1	x
m2.4xlarge	x	68.40	Intel Xeon Family	8	8	1	x
<b>M3</b>							
m3.medium	x	3.75	Intel Xeon E5-2670v2	1	1	1	x
m3.large	x	7.50	Intel Xeon E5-2670v2	2	1	2	x
m3.xlarge	x	15.00	Intel Xeon E5-2670v2	4	2	2	x

Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
m3.2xlarge	X	30.00	Intel Xeon E5-2670v2	8	4	2	X
<b>M4</b>							
m4.large	X	8.00	Intel Xeon E5-2676v3	2	1	2	X
m4.xlarge	X	16.00	Intel Xeon E5-2676v3	4	2	2	X
m4.2xlarge	X	32.00	Intel Xeon E5-2676v3	8	4	2	X
m4.4xlarge	X	64.00	Intel Xeon E5-2676v3	16	8	2	X
m4.10xlarge	X	160.00	Intel Xeon E5-2676v3	40	20	2	X
m4.16xlarge	X	256.00	Intel Xeon E5-2686v4	64	32	2	X
<b>R3</b>							
r3.large	X	15.00	Intel Xeon E5-2670v2	2	1	2	X
r3.xlarge	X	30.50	Intel Xeon E5-2670v2	4	2	2	X
r3.2xlarge	X	61.00	Intel Xeon E5-2670v2	8	4	2	X
r3.4xlarge	X	122.00	Intel Xeon E5-2670v2	16	8	2	X



Instance type	Burstable	Memory (GiB)	Processor	vCPUs	CPU cores	Threads per core	Accelerators
r3.8xlarge	x	244.00	Intel Xeon E5-2670v2	32	16	2	x
<b>R4</b>							
r4.large	x	15.25	Intel Broadwell E5-2686v4	2	1	2	x
r4.xlarge	x	30.50	Intel Broadwell E5-2686v4	4	2	2	x
r4.2xlarge	x	61.00	Intel Broadwell E5-2686v4	8	4	2	x
r4.4xlarge	x	122.00	Intel Broadwell E5-2686v4	16	8	2	x
r4.8xlarge	x	244.00	Intel Broadwell E5-2686v4	32	16	2	x
r4.16xlarge	x	488.00	Intel Broadwell E5-2686v4	64	32	2	x
<b>T1</b>							
t1.micro	x	0.61	Intel E5-2650	1	1	1	x

## Network specifications

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>A1</b>								
a1.medium <sup>1</sup>	0.5 / 10.0	x	✓	x	1	2	4	✓
a1.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
a1.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
a1.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
a1.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
a1.metal <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
<b>C1</b>								
c1.medium	Moderate	x	x	x	1	2	6	x
c1.xlarge	High	x	x	x	1	4	15	x
<b>C3</b>								
c3.large	Moderate	x	x <sup>2</sup>	x	1	3	10	✓
c3.xlarge	Moderate	x	x <sup>2</sup>	x	1	4	15	✓
c3.2xlarge	High	x	x <sup>2</sup>	x	1	4	15	✓
c3.4xlarge	High	x	x <sup>2</sup>	x	1	8	30	✓
c3.8xlarge	10 Gigabit	x	x <sup>2</sup>	x	1	8	30	✓
<b>C4</b>								

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
c4.large	Moderate	x	x <sup>2</sup>	x	1	3	10	✓
c4.xlarge	High	x	x <sup>2</sup>	x	1	4	15	✓
c4.2xlarge	High	x	x <sup>2</sup>	x	1	4	15	✓
c4.4xlarge	High	x	x <sup>2</sup>	x	1	8	30	✓
c4.8xlarge	10 Gigabit	x	x <sup>2</sup>	x	1	8	30	✓
<b>I2</b>								
i2.xlarge	Moderate	x	x <sup>2</sup>	x	1	4	15	✓
i2.2xlarge	High	x	x <sup>2</sup>	x	1	4	15	✓
i2.4xlarge	High	x	x <sup>2</sup>	x	1	8	30	✓
i2.8xlarge	10 Gigabit	x	x <sup>2</sup>	x	1	8	30	✓
<b>M1</b>								
m1.small	Low	x	x	x	1	2	4	x
m1.medium	Moderate	x	x	x	1	2	6	x
m1.large	Moderate	x	x	x	1	3	10	x
m1.xlarge	High	x	x	x	1	4	15	x
<b>M2</b>								
m2.xlarge	Moderate	x	x	x	1	4	15	x
m2.2xlarge	Moderate	x	x	x	1	4	30	x
m2.4xlarge	High	x	x	x	1	8	30	x

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
<b>M3</b>								
m3.medium	Moderate	X	X	X	1	2	6	X
m3.large	Moderate	X	X	X	1	3	10	X
m3.xlarge	High	X	X	X	1	4	15	X
m3.2xlarge	High	X	X	X	1	4	30	X
<b>M4</b>								
m4.large	Moderate	X	X <sup>2</sup>	X	1	2	10	✓
m4.xlarge	High	X	X <sup>2</sup>	X	1	4	15	✓
m4.2xlarge	High	X	X <sup>2</sup>	X	1	4	15	✓
m4.4xlarge	High	X	X <sup>2</sup>	X	1	8	30	✓
m4.10xlarge	10 Gigabit	X	X <sup>2</sup>	X	1	8	30	✓
m4.16xlarge	25 Gigabit	X	✓	X	1	8	30	✓
<b>R3</b>								
r3.large	Moderate	X	X <sup>2</sup>	X	1	3	10	✓
r3.xlarge	Moderate	X	X <sup>2</sup>	X	1	4	15	✓
r3.2xlarge	High	X	X <sup>2</sup>	X	1	4	15	✓
r3.4xlarge	High	X	X <sup>2</sup>	X	1	8	30	✓
r3.8xlarge	10 Gigabit	X	X <sup>2</sup>	X	1	8	30	✓
<b>R4</b>								

Instance type	Baseline / Burst bandwidth (Gbps)	EFA	ENA	ENA Express	Network cards	Max. network interfaces	IP addresses per interface	IPv6
r4.large <sup>1</sup>	0.75 / 10.0	x	✓	x	1	3	10	✓
r4.xlarge <sup>1</sup>	1.25 / 10.0	x	✓	x	1	4	15	✓
r4.2xlarge <sup>1</sup>	2.5 / 10.0	x	✓	x	1	4	15	✓
r4.4xlarge <sup>1</sup>	5.0 / 10.0	x	✓	x	1	8	30	✓
r4.8xlarge	10 Gigabit	x	✓	x	1	8	30	✓
r4.16xlarge	25 Gigabit	x	✓	x	1	15	50	✓
<b>T1</b>								
t1.micro	Very Low	x	x	x	1	2	2	x

**Note**

<sup>1</sup> These instances have a baseline bandwidth and can use a network I/O credit mechanism to burst beyond their baseline bandwidth on a best effort basis. Other instances types can sustain their maximum performance indefinitely. For more information, see [instance network bandwidth](#).

<sup>2</sup> These instances support enhanced networking using the Intel 82599 VF interface.

## Amazon EBS specifications

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>A1</b>					
a1.medium <sup>1</sup>	300.00 / 3500.00	37.50 / 437.50	2500.00 / 20000.00	✓	default
a1.large <sup>1</sup>	525.00 / 3500.00	65.62 / 437.50	4000.00 / 20000.00	✓	default
a1.xlarge <sup>1</sup>	800.00 / 3500.00	100.00 / 437.50	6000.00 / 20000.00	✓	default
a1.2xlarge <sup>1</sup>	1750.00 / 3500.00	218.75 / 437.50	10000.00 / 20000.00	✓	default
a1.4xlarge	3500.00	437.50	20000.00	✓	default
a1.metal	3500.00	437.50	20000.00	✓	default
<b>C1</b>					
c1.xlarge	1000.00	125.00	8000.00	✗	supported
<b>C3</b>					
c3.xlarge	500.00	62.50	4000.00	✗	supported
c3.2xlarge	1000.00	125.00	8000.00	✗	supported
c3.4xlarge	2000.00	250.00	16000.00	✗	supported
<b>C4</b>					

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
c4.large	500.00	62.50	4000.00	x	default
c4.xlarge	750.00	93.75	6000.00	x	default
c4.2xlarge	1000.00	125.00	8000.00	x	default
c4.4xlarge	2000.00	250.00	16000.00	x	default
c4.8xlarge	4000.00	500.00	32000.00	x	default
<b>I2</b>					
i2.xlarge	500.00	62.50	4000.00	x	supported
i2.2xlarge	1000.00	125.00	8000.00	x	supported
i2.4xlarge	2000.00	250.00	16000.00	x	supported
<b>M1</b>					
m1.large	500.00	62.50	4000.00	x	supported
m1.xlarge	1000.00	125.00	8000.00	x	supported
<b>M2</b>					
m2.2xlarge	500.00	62.50	4000.00	x	supported
m2.4xlarge	1000.00	125.00	8000.00	x	supported
<b>M3</b>					
m3.xlarge	500.00	62.50	4000.00	x	supported
m3.2xlarge	1000.00	125.00	8000.00	x	supported

Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
<b>M4</b>					
m4.large	450.00	56.25	3600.00	x	default
m4.xlarge	750.00	93.75	6000.00	x	default
m4.2xlarge	1000.00	125.00	8000.00	x	default
m4.4xlarge	2000.00	250.00	16000.00	x	default
m4.10xlarge	4000.00	500.00	32000.00	x	default
m4.16xlarge	10000.00	1250.00	65000.00	x	default
<b>R3</b>					
r3.xlarge	500.00	62.50	4000.00	x	supported
r3.2xlarge	1000.00	125.00	8000.00	x	supported
r3.4xlarge	2000.00	250.00	16000.00	x	supported
<b>R4</b>					
r4.large	425.00	53.12	3000.00	x	default
r4.xlarge	850.00	106.25	6000.00	x	default
r4.2xlarge	1700.00	212.50	12000.00	x	default
r4.4xlarge	3500.00	437.50	18750.00	x	default
r4.8xlarge	7000.00	875.00	37500.00	x	default
r4.16xlarge	14000.00	1750.00	75000.00	x	default



Instance type	Baseline / Maximum bandwidth (Mbps)	Baseline / Maximum throughput (MB/s, 128 KiB I/O)	Baseline / Maximum IOPS (16 KiB I/O)	NVMe	EBS optimization <sup>2</sup>
---------------	-------------------------------------	---	--------------------------------------	------	-------------------------------

### T1

#### Note

<sup>1</sup> These instances can support maximum performance for 30 minutes at least once every 24 hours, after which they revert to their baseline performance. Other instances can sustain the maximum performance indefinitely. If your workload requires sustained maximum performance for longer than 30 minutes, use one of these instances.

<sup>2</sup> default indicates that instances are enabled for EBS optimization by default. supported indicates that instances can optionally be enabled for EBS optimization. For more information, see [Amazon EBS-optimized instances](#).

## Instance store specifications

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
---------------	------------------------	---------------------	---------------------------------	-----------------------------------	---------------------------

### C1

c1.medium	1 x 350 GB	HDD		✓	
c1.xlarge	4 x 420 GB	HDD		✓	

### C3

c3.large	2 x 16 GB	SSD		✓	
c3.xlarge	2 x 40 GB	SSD		✓	

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
c3.2xlarge	2 x 80 GB	SSD		✓	
c3.4xlarge	2 x 160 GB	SSD		✓	
c3.8xlarge	2 x 320 GB	SSD		✓	
<b>I2</b>					
i2.xlarge	1 x 800 GB	SSD		✓	
i2.2xlarge	2 x 800 GB	SSD		✓	
i2.4xlarge	4 x 800 GB	SSD		✓	
i2.8xlarge	8 x 800 GB	SSD		✓	
<b>M1</b>					
m1.small	1 x 160 GB	HDD		✓	
m1.medium	1 x 410 GB	HDD		✓	
m1.large	2 x 420 GB	HDD		✓	
m1.xlarge	4 x 420 GB	HDD		✓	
<b>M2</b>					
m2.xlarge	1 x 420 GB	HDD		✓	
m2.2xlarge	1 x 850 GB	HDD		✓	
m2.4xlarge	2 x 840 GB	HDD		✓	
<b>M3</b>					
m3.medium	1 x 4 GB	SSD		✓	

Instance type	Instance store volumes	Instance store type	Read / Write performance (IOPS)	Needs initialization <sup>1</sup>	TRIM support <sup>2</sup>
m3.large	1 x 32 GB	SSD		✓	
m3.xlarge	2 x 40 GB	SSD		✓	
m3.2xlarge	2 x 80 GB	SSD		✓	
<b>R3</b>					
r3.large	1 x 32 GB	SSD		✓	
r3.xlarge	1 x 80 GB	SSD		✓	
r3.2xlarge	1 x 160 GB	SSD		✓	
r3.4xlarge	1 x 320 GB	SSD		✓	
r3.8xlarge	2 x 320 GB	SSD		✓	

<sup>1</sup> Volumes attached to certain instances suffer a first-write penalty unless initialized. For more information, see [Optimize disk performance for instance store volumes](#).

<sup>2</sup> For more information, see [Instance store volume TRIM support](#).

## Security specifications

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
<b>A1</b>						
a1.medium	✓	Instance store not supported	x	x	x	x

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
a1.large	✓	Instance store not supported	X	X	X	X
a1.xlarge	✓	Instance store not supported	X	X	X	X
a1.2xlarge	✓	Instance store not supported	X	X	X	X
a1.4xlarge	✓	Instance store not supported	X	X	X	X
a1.metal	✓	Instance store not supported	X	X	X	X
<b>C1</b>						
c1.medium	✓	X	X	X	X	X
c1.xlarge	✓	X	X	X	X	X
<b>C3</b>						
c3.large	✓	X	X	X	X	X
c3.xlarge	✓	X	X	X	X	X
c3.2xlarge	✓	X	X	X	X	X
c3.4xlarge	✓	X	X	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
c3.xlarge	✓	X	X	X	X	X
<b>C4</b>						
c4.large	✓	Instance store not supported	X	X	X	X
c4.xlarge	✓	Instance store not supported	X	X	X	X
c4.2xlarge	✓	Instance store not supported	X	X	X	X
c4.4xlarge	✓	Instance store not supported	X	X	X	X
c4.8xlarge	✓	Instance store not supported	X	X	X	X
<b>I2</b>						
i2.xlarge	✓	X	X	X	X	X
i2.2xlarge	✓	X	X	X	X	X
i2.4xlarge	✓	X	X	X	X	X
i2.8xlarge	✓	X	X	X	X	X
<b>M1</b>						

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m1.small	✓	X	X	X	X	X
m1.medium	✓	X	X	X	X	X
m1.large	✓	X	X	X	X	X
m1.xlarge	✓	X	X	X	X	X
<b>M2</b>						
m2.xlarge	✓	X	X	X	X	X
m2.2xlarge	✓	X	X	X	X	X
m2.4xlarge	✓	X	X	X	X	X
<b>M3</b>						
m3.medium	✓	X	X	X	X	X
m3.large	✓	X	X	X	X	X
m3.xlarge	✓	X	X	X	X	X
m3.2xlarge	✓	X	X	X	X	X
<b>M4</b>						
m4.large	✓	Instance store not supported	X	X	X	X
m4.xlarge	✓	Instance store not supported	X	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
m4.2xlarge	✓	Instance store not supported	X	X	X	X
m4.4xlarge	✓	Instance store not supported	X	X	X	X
m4.10xlarge	✓	Instance store not supported	X	X	X	X
m4.16xlarge	✓	Instance store not supported	X	X	X	X
<b>R3</b>						
r3.large	✓	X	X	X	X	X
r3.xlarge	✓	X	X	X	X	X
r3.2xlarge	✓	X	X	X	X	X
r3.4xlarge	✓	X	X	X	X	X
r3.8xlarge	✓	X	X	X	X	X
<b>R4</b>						
r4.large	✓	Instance store not supported	X	X	X	X

Instance type	EBS encryption	Instance store encryption	Encryption in transit	AMD SEV-SNP	NitroTPM	Nitro Enclaves
r4.xlarge	✓	Instance store not supported	X	X	X	X
r4.2xlarge	✓	Instance store not supported	X	X	X	X
r4.4xlarge	✓	Instance store not supported	X	X	X	X
r4.8xlarge	✓	Instance store not supported	X	X	X	X
r4.16xlarge	✓	Instance store not supported	X	X	X	X
<b>T1</b>						
t1.micro	✓	Instance store not supported	X	X	X	X



# Instances built on the Amazon Nitro System

The Nitro System is a collection of hardware and software components built by Amazon that enable high performance, high availability, and high security..

The Nitro System provides bare metal capabilities that eliminate virtualization overhead and support workloads that require full access to host hardware. Bare metal instances are well suited for the following:

- Workloads that require access to low-level hardware features (for example, Intel VT) that are not available or fully supported in virtualized environments
- Applications that require a non-virtualized environment for licensing or support

## Nitro components

The following components are part of the Nitro System:

- Nitro card
  - Local NVMe storage volumes
  - Networking hardware support
  - Management
  - Monitoring
  - Security
- Nitro security chip, integrated into the motherboard
- Nitro hypervisor - A lightweight hypervisor that manages memory and CPU allocation and delivers performance that is indistinguishable from bare metal for most workloads.

## Virtualized instances

The following virtualized instances are built on the Nitro System:

- **General purpose:** M5 | M5a | M5ad | M5d | M5dn | M5n | M5zn | M6a | M6g | M6gd | M6i | M6id | M6idn | M6in | M7a | M7g | M7gd | M7i | M7i-flex | T3 | T3a | T4g
- **Compute optimized:** C5 | C5a | C5ad | C5d | C5n | C6a | C6g | C6gd | C6gn | C6i | C6id | C6in | C7a | C7g | C7gd | C7gn | C7i

- **Memory optimized:** R5 | R5a | R5ad | R5b | R5d | R5dn | R5n | R6a | R6g | R6gd | R6i | R6idn | R6in | R6id | R7a | R7g | R7gd | R7i | R7iz | U-3tb1 | U-6tb1 | U-9tb1 | U-12tb1 | U-18tb1 | U-24tb1 | X2gd | X2idn | X2iedn | X2iezn | z1d
- **Storage optimized:** D3 | D3en | I3en | I4g | I4i | I4gn | I4gen
- **Accelerated computing:** DL1 | DL2q | G4ad | G4dn | G5 | G5g | G6 | Gr6 | Inf1 | Inf2 | P3dn | P4d | P4de | P5 | Trn1 | Trn1n | VT1
- **High-performance computing:** Hpc6a | Hpc6id | Hpc7a | Hpc7g
- **Previous generation:** A1

## Bare metal instances

The following bare metal instances are built on the Nitro System:

- **General purpose:** m5.metal | m5d.metal | m5dn.metal | m5n.metal | m5zn.metal | m6a.metal | m6g.metal | m6gd.metal | m6i.metal | m6id.metal | m6idn.metal | m6in.metal | m7a.metal-48x1 | m7g.metal | m7gd.metal | m7i.metal-24x1 | m7i.metal-48x1 | mac1.metal | mac2.metal | mac2-m2.metal | mac2-m2pro.metal
- **Compute optimized:** c5.metal | c5d.metal | c5n.metal | c6a.metal | c6g.metal | c6gd.metal | c6i.metal | c6id.metal | c6in.metal | c7a.metal-48x1 | c7g.metal | c7gd.metal | c7gn.metal | c7i.metal-24x1 | c7i.metal-48x1
- **Memory optimized:** r5.metal | r5b.metal | r5d.metal | r5dn.metal | r5n.metal | r6a.metal | r6g.metal | r6gd.metal | r6i.metal | r6idn.metal | r6in.metal | r6id.metal | r7a.metal-48x1 | r7g.metal | r7gd.metal | r7i.metal-24x1 | r7i.metal-48x1 | r7iz.metal-16x1 | r7iz.metal-32x1 | u-6tb1.metal | u-9tb1.metal | u-12tb1.metal | u-18tb1.metal | u-24tb1.metal | x2gd.metal | x2idn.metal | x2iedn.metal | x2iezn.metal | z1d.metal
- **Storage optimized:** i3.metal | i3en.metal | i4i.metal
- **Accelerated computing:** g4dn.metal | g5g.metal
- **Previous generation:** a1.metal

Launching a bare metal instance boots the underlying server, which includes verifying all hardware and firmware components. This means that it can take 20 minutes from the time the instance enters the running state until it becomes available over the network.

# Requirements

- Instances built on the Nitro System have the following driver requirements:
  - [NVMe](#) drivers must be installed
  - [Elastic Network Adapter \(ENA\)](#) drivers must be installed

The current Amazon Windows AMIs meet these requirements and the following Linux AMIs meet these requirements:

- AL2023
- Amazon Linux 2
- Ubuntu 14.04 or later with the `linux-aws` kernel
- Red Hat Enterprise Linux 7.4 or later
- SUSE Linux Enterprise Server 12 SP2 or later
- CentOS 7.4.1708 or later
- FreeBSD 11.1 or later
- Debian GNU/Linux 9 or later
- Instances with Amazon Graviton processors have the following requirements:
  - An AMI for the 64-bit Arm architecture
  - Support for booting through UEFI with ACPI tables and ACPI hot-plug of PCI devices

The following AMIs meet these requirements:

- Amazon Linux 2 (64-bit Arm)
- Ubuntu 16.04 or later (64-bit Arm) with the `linux-aws` kernel
- Red Hat Enterprise Linux 8.0 or later (64-bit Arm)
- SUSE Linux Enterprise Server 15 or later (64-bit Arm)
- Debian 10 or later (64-bit Arm)

# Amazon EC2 instance type quotas

The following quotas apply to Amazon EC2 instances by default.

## Quotas

- [On-Demand Instance quotas](#)
- [Spot Instance quotas](#)
- [Dedicated Host quotas](#)

## On-Demand Instance quotas

The following table shows the maximum number of vCPUs that you can provision for On-Demand Instances per instance type. For more information, see [On-Demand Instance quotas](#) in the *Amazon EC2 User Guide*.

Name	Default	Adjustable
Running On-Demand DL instances	0	<a href="#">Yes</a>
Running On-Demand F instances	0	<a href="#">Yes</a>
Running On-Demand G and VT instances	0	<a href="#">Yes</a>
Running On-Demand HPC instances	0	<a href="#">Yes</a>
Running On-Demand High Memory instances	0	<a href="#">Yes</a>
Running On-Demand Inf instances	0	<a href="#">Yes</a>
Running On-Demand P instances	0	<a href="#">Yes</a>
Running On-Demand Standard (A, C, D, H, I, M, R, T, Z) instances	5	<a href="#">Yes</a>
Running On-Demand Trn instances	0	<a href="#">Yes</a>
Running On-Demand X instances	0	<a href="#">Yes</a>

## Spot Instance quotas

The following table shows the maximum number of vCPUs that you can provision for Spot Instances per instance type. For more information, see [Spot Instance quotas](#) in the *Amazon EC2 User Guide*.

Name	Default	Adjustable
All DL Spot Instance Requests	0	<a href="#">Yes</a>
All F Spot Instance Requests	0	<a href="#">Yes</a>
All G and VT Spot Instance Requests	0	<a href="#">Yes</a>
All Inf Spot Instance Requests	0	<a href="#">Yes</a>
All P4, P3 and P2 Spot Instance Requests	0	<a href="#">Yes</a>
All P5 Spot Instance Requests	0	<a href="#">Yes</a>
All Standard (A, C, D, H, I, M, R, T, Z) Spot Instance Requests	5	<a href="#">Yes</a>
All Trn Spot Instance Requests	0	<a href="#">Yes</a>
All X Spot Instance Requests	0	<a href="#">Yes</a>

## Dedicated Host quotas

The following table shows the maximum number of running Dedicated Hosts that you can allocate per instance type.

Name	Default	Adjustable
Running Dedicated a1 Hosts	0	<a href="#">Yes</a>
Running Dedicated c3 Hosts	0	<a href="#">Yes</a>
Running Dedicated c4 Hosts	0	<a href="#">Yes</a>

Name	Default	Adjustable
Running Dedicated c5 Hosts	0	<a href="#">Yes</a>
Running Dedicated c5a Hosts	0	<a href="#">Yes</a>
Running Dedicated c5d Hosts	0	<a href="#">Yes</a>
Running Dedicated c5n Hosts	0	<a href="#">Yes</a>
Running Dedicated c6a Hosts	0	<a href="#">Yes</a>
Running Dedicated c6g Hosts	0	<a href="#">Yes</a>
Running Dedicated c6gd Hosts	0	<a href="#">Yes</a>
Running Dedicated c6gn Hosts	0	<a href="#">Yes</a>
Running Dedicated c6i Hosts	0	<a href="#">Yes</a>
Running Dedicated c6id Hosts	0	<a href="#">Yes</a>
Running Dedicated c6in Hosts	0	<a href="#">Yes</a>
Running Dedicated c7a Hosts	0	<a href="#">Yes</a>
Running Dedicated c7g Hosts	0	<a href="#">Yes</a>
Running Dedicated c7gd Hosts	0	<a href="#">Yes</a>
Running Dedicated c7gn Hosts	0	<a href="#">Yes</a>
Running Dedicated c7i Hosts	0	<a href="#">Yes</a>
Running Dedicated d2 Hosts	0	<a href="#">Yes</a>
Running Dedicated dl1 Hosts	0	<a href="#">Yes</a>
Running Dedicated f1 Hosts	0	<a href="#">Yes</a>
Running Dedicated g3 Hosts	0	<a href="#">Yes</a>

Name	Default	Adjustable
Running Dedicated g3s Hosts	0	<a href="#">Yes</a>
Running Dedicated g4ad Hosts	0	<a href="#">Yes</a>
Running Dedicated g4dn Hosts	0	<a href="#">Yes</a>
Running Dedicated g5 Hosts	0	<a href="#">Yes</a>
Running Dedicated g5g Hosts	0	<a href="#">Yes</a>
Running Dedicated g6 Hosts	0	<a href="#">Yes</a>
Running Dedicated gr6 Hosts	0	<a href="#">Yes</a>
Running Dedicated h1 Hosts	0	<a href="#">Yes</a>
Running Dedicated i2 Hosts	0	<a href="#">Yes</a>
Running Dedicated i3 Hosts	0	<a href="#">Yes</a>
Running Dedicated i3en Hosts	0	<a href="#">Yes</a>
Running Dedicated i4g Hosts	0	<a href="#">Yes</a>
Running Dedicated i4i Hosts	0	<a href="#">Yes</a>
Running Dedicated im4gn Hosts	0	<a href="#">Yes</a>
Running Dedicated inf Hosts	0	<a href="#">Yes</a>
Running Dedicated inf2 Hosts	0	<a href="#">Yes</a>
Running Dedicated is4gen Hosts	0	<a href="#">Yes</a>
Running Dedicated m3 Hosts	0	<a href="#">Yes</a>
Running Dedicated m4 Hosts	0	<a href="#">Yes</a>
Running Dedicated m5 Hosts	0	<a href="#">Yes</a>

Name	Default	Adjustable
Running Dedicated m5a Hosts	0	<a href="#">Yes</a>
Running Dedicated m5ad Hosts	0	<a href="#">Yes</a>
Running Dedicated m5d Hosts	0	<a href="#">Yes</a>
Running Dedicated m5dn Hosts	0	<a href="#">Yes</a>
Running Dedicated m5n Hosts	0	<a href="#">Yes</a>
Running Dedicated m5zn Hosts	0	<a href="#">Yes</a>
Running Dedicated m6a Hosts	0	<a href="#">Yes</a>
Running Dedicated m6g Hosts	0	<a href="#">Yes</a>
Running Dedicated m6gd Hosts	0	<a href="#">Yes</a>
Running Dedicated m6i Hosts	0	<a href="#">Yes</a>
Running Dedicated m6id Hosts	0	<a href="#">Yes</a>
Running Dedicated m6idn Hosts	0	<a href="#">Yes</a>
Running Dedicated m6in Hosts	0	<a href="#">Yes</a>
Running Dedicated m7a Hosts	0	<a href="#">Yes</a>
Running Dedicated m7g Hosts	0	<a href="#">Yes</a>
Running Dedicated m7gd Hosts	0	<a href="#">Yes</a>
Running Dedicated m7i Hosts	0	<a href="#">Yes</a>
Running Dedicated mac1 Hosts	0	<a href="#">Yes</a>
Running Dedicated mac2 Hosts	0	<a href="#">Yes</a>
Running Dedicated mac2-m2 Hosts	0	<a href="#">Yes</a>



Name	Default	Adjustable
Running Dedicated mac2-m2pro Hosts	0	<a href="#">Yes</a>
Running Dedicated p2 Hosts	0	<a href="#">Yes</a>
Running Dedicated p3 Hosts	0	<a href="#">Yes</a>
Running Dedicated p3dn Hosts	0	<a href="#">Yes</a>
Running Dedicated p4d Hosts	0	<a href="#">Yes</a>
Running Dedicated p5 Hosts	0	<a href="#">Yes</a>
Running Dedicated r3 Hosts	0	<a href="#">Yes</a>
Running Dedicated r4 Hosts	0	<a href="#">Yes</a>
Running Dedicated r5 Hosts	0	<a href="#">Yes</a>
Running Dedicated r5a Hosts	0	<a href="#">Yes</a>
Running Dedicated r5ad Hosts	0	<a href="#">Yes</a>
Running Dedicated r5b Hosts	0	<a href="#">Yes</a>
Running Dedicated r5d Hosts	0	<a href="#">Yes</a>
Running Dedicated r5dn Hosts	0	<a href="#">Yes</a>
Running Dedicated r5n Hosts	0	<a href="#">Yes</a>
Running Dedicated r6a Hosts	0	<a href="#">Yes</a>
Running Dedicated r6g Hosts	0	<a href="#">Yes</a>
Running Dedicated r6gd Hosts	0	<a href="#">Yes</a>
Running Dedicated r6i Hosts	0	<a href="#">Yes</a>
Running Dedicated r6id Hosts	0	<a href="#">Yes</a>

Name	Default	Adjustable
Running Dedicated r6idn Hosts	0	<a href="#">Yes</a>
Running Dedicated r6in Hosts	0	<a href="#">Yes</a>
Running Dedicated r7a Hosts	0	<a href="#">Yes</a>
Running Dedicated r7g Hosts	0	<a href="#">Yes</a>
Running Dedicated r7gd Hosts	0	<a href="#">Yes</a>
Running Dedicated r7i Hosts	0	<a href="#">Yes</a>
Running Dedicated r7iz Hosts	0	<a href="#">Yes</a>
Running Dedicated t3 Hosts	0	<a href="#">Yes</a>
Running Dedicated trn1 Hosts	0	<a href="#">Yes</a>
Running Dedicated trn1n Hosts	0	<a href="#">Yes</a>
Running Dedicated u-12tb1 Hosts	0	<a href="#">Yes</a>
Running Dedicated u-18tb1 Hosts	0	<a href="#">Yes</a>
Running Dedicated u-24tb1 Hosts	0	<a href="#">Yes</a>
Running Dedicated u-3tb1 Hosts	0	<a href="#">Yes</a>
Running Dedicated u-6tb1 Hosts	0	<a href="#">Yes</a>
Running Dedicated u-9tb1 Hosts	0	<a href="#">Yes</a>
Running Dedicated vt1 Hosts	0	<a href="#">Yes</a>
Running Dedicated x1 Hosts	0	<a href="#">Yes</a>
Running Dedicated x1e Hosts	0	<a href="#">Yes</a>
Running Dedicated x2gd Hosts	0	<a href="#">Yes</a>

Name	Default	Adjustable
Running Dedicated x2idn Hosts	0	<a href="#">Yes</a>
Running Dedicated x2iedn Hosts	0	<a href="#">Yes</a>
Running Dedicated x2iezn Hosts	0	<a href="#">Yes</a>
Running Dedicated z1d Hosts	0	<a href="#">Yes</a>

# Document history for the Amazon EC2 Instance Types Guide

The following table describes the documentation releases for Amazon EC2.

Change	Description	Date
<a href="#">New accelerated instance types: g6 and gr6</a>	New high performance GPU-based instance types for deep learning inference and graphics-intensive applications.	April 4, 2024
<a href="#">C7gn bare metal instance</a>	New c7gn.metal bare metal instance type powered by the latest generation Amazon Graviton3E processors and the new Amazon Nitro cards.	March 26, 2024
<a href="#">New bare metal instances</a>	Bare metal instances for C7gd, M7gd, and R7gd.	March 6, 2024
<a href="#">DL2q instances</a>	New instances that use Qualcomm AI100 inference accelerators, which feature 7th generation Qualcomm Edge AI cores. These instances can be used to cost-efficiently deploy deep learning (DL) workloads in the cloud or validate performance and accuracy of DL workloads that will be deployed on Qualcomm edge devices.	November 15, 2023

---

<a href="#">Mac2-m2 instances</a>	New general purpose instance type that features Apple M2 processors.	October 25, 2023
<a href="#">R7i instances</a>	New memory optimized instance types that feature 4th generation Intel Xeon Scalable processors.	October 16, 2023
<a href="#">C7a instances</a>	New compute optimized instances powered by 4th generation AMD EPYC processors.	October 4, 2023
<a href="#">Mac2-m2pro instances</a>	New general purpose instance type that features Apple M2 Pro processors.	September 18, 2023
<a href="#">C7i instances</a>	New compute optimized instance types that feature 4th generation Intel Xeon Scalable processors.	September 14, 2023
<a href="#">R7a instances</a>	New memory optimized instance types featuring 4th generation AMD EPYC 9R14 processors and up to 1536 GiB of system memory.	September 11, 2023
<a href="#">R7iz instances</a>	New high-frequency and high memory instances powered by 4th generation Intel Xeon processors.	September 7, 2023

---

<a href="#">Hpc7a instances</a>	New compute optimized instance types that feature 4th generation AMD EPYC processors. These instances support up to 300 Gbps networking bandwidth, and up to 192 CPU cores with up to 768 GB of system memory.	August 17, 2023
<a href="#">M7a instances</a>	New general purpose instances powered by 4th generation AMD EPYC processors.	August 15, 2023
<a href="#">M7i-flex instances</a>	New general purpose instances that offer a balance of compute, memory, and network resources for a broad spectrum of general purpose applications. They deliver a baseline CPU performance of 40 percent with the ability to deliver up to 100 percent CPU performance for 95 percent of the time over a 24-hour period.	August 2, 2023
<a href="#">M7i instances</a>	New general purpose instance types that feature 4th generation Intel Xeon Scalable processors.	August 2, 2023
<a href="#">R7gd instances</a>	New memory optimized instances featuring the latest Amazon Graviton3 processors.	July 28, 2023

---

<a href="#">M7gd instances</a>	New general purpose instances featuring the latest Amazon Graviton3 processors.	July 28, 2023
<a href="#">C7gd instances</a>	New compute optimized instances featuring the latest Amazon Graviton3 processors.	July 28, 2023
<a href="#">P5 instances</a>	New accelerated computing instances that feature 8 NVIDIA H100 GPUs with 640 GB high-bandwidth GPU memory, 3rd generation AMD EPYC processors, and 2 TB system memory.	July 26, 2023
<a href="#">Hpc7g instances</a>	New high-performance computing instances powered by Amazon Graviton3E processors that provide up to 35 percent higher vector-instruction processing performance than Graviton3 processors.	June 20, 2023
<a href="#">C7gn instances</a>	New compute optimized instances powered by the latest generation Amazon Graviton3E processors and the new Amazon Nitro cards. These instances offer up to 200 Gbps network bandwidth.	June 20, 2023

---

<a href="#">Trn1n instances</a>	New accelerated computing instances optimized for machine learning training powered by Amazon Trainium accelerators.	April 13, 2023
<a href="#">Inf2 instances</a>	New instances featuring Amazon Inferentia2 accelerators, the latest machine learning chip designed by Amazon.	April 13, 2023
<a href="#">Hpc6id instance</a>	New memory optimized instance featuring 3rd generation Intel Xeon Scalable processors (Ice Lake).	November 29, 2022
<a href="#">R6in and R6idn instances</a>	New memory optimized instances for network-intensive workloads.	November 28, 2022
<a href="#">M6in and M6idn instances</a>	New general computing instances types.	November 28, 2022
<a href="#">C6in instances</a>	New compute optimized instances ideal for running high performance computing.	November 28, 2022
<a href="#">Trn1 instances</a>	New accelerated computing instances optimized for deep learning powered by Amazon Trainium chips.	October 10, 2022
<a href="#">R6a instances</a>	New memory optimized instances featuring 3rd generation AMD EPYC processors.	July 19, 2022



---

<a href="#">R6id instances</a>	New memory optimized instances featuring 3rd generation Intel Xeon Scalable processors (Ice Lake).	June 9, 2022
<a href="#">M6id instances</a>	New general purpose instances featuring 3rd generation Intel Xeon Scalable processors (Ice Lake).	May 26, 2022
<a href="#">C6id instances</a>	New compute optimized instances featuring 3rd generation Intel Xeon Scalable processors (Ice Lake).	May 26, 2022
<a href="#">C7g instances</a>	New compute optimized instances featuring Amazon Graviton3 processors.	May 23, 2022
<a href="#">I4i instances</a>	New storage optimized instances featuring 3rd generation Intel Xeon Scalable processors (Ice Lake).	April 27, 2022
<a href="#">X2idn and X2iedn instances</a>	New memory optimized instances featuring Intel Xeon Scalable processors (Ice Lake).	March 10, 2022
<a href="#">C6a instances</a>	New compute optimized instances featuring 3rd generation AMD EPYC processors (Milan).	February 14, 2022
<a href="#">X2iezn instances</a>	New memory optimized instances featuring Intel Xeon Platinum processors (Cascade Lake).	January 26, 2022

---

<a href="#">Hpc6a instances</a>	New compute optimized instances featuring AMD EPYC processors.	January 10, 2022
<a href="#">I4gn and I4gen instances</a>	New storage optimized instances.	November 30, 2021
<a href="#">M6a instances</a>	New general purpose instances powered by AMD 3rd Generation EPYC processors.	November 29, 2021
<a href="#">G5g instances</a>	New accelerated computing instances featuring Amazon Graviton2 processors based on 64-bit Arm architecture.	November 29, 2021
<a href="#">R6i instances</a>	New memory optimized instances.	November 22, 2021
<a href="#">G5 instances</a>	New accelerated computing instances featuring up to 8 NVIDIA A10G GPUs and second generation AMD EPY processors.	November 11, 2021
<a href="#">C6i instances</a>	New compute optimized instances featuring Intel Xeon Scalable processors (Ice Lake).	October 28, 2021
<a href="#">VT1 instances</a>	New accelerated computing instances that use Xilinx Alveo U30 media accelerators and are designed for live video transcoding workloads.	September 13, 2021

---

<a href="#">M6i instances</a>	New general purpose instances featuring third generation Intel Xeon Scalable processors (Ice Lake).	August 16, 2021
<a href="#">High memory virtualized instances</a>	Virtualized high memory instances purpose-built to run large in-memory databases. The new types are u-6tb1.56xlarge, u-6tb1.112xlarge, u-9tb1.112xlarge, and u-12tb1.112xlarge.	May 11, 2021
<a href="#">X2gd instances</a>	New memory optimized instances featuring an Amazon Graviton2 processor based on 64-bit Arm architecture.	March 16, 2021
<a href="#">C6gn instances</a>	New computed optimized instances featuring an Amazon Graviton2 processor based on 64-bit Arm architecture. These instances can utilize up to 100 Gbps of network bandwidth.	December 18, 2020
<a href="#">G4ad instances</a>	New instances powered by AMD Radeon Pro V520 GPUs and AMD 2nd Generation EPYC processors.	December 9, 2020
<a href="#">D3, D3en, M5zn, and R5b instances</a>	New instance types built on the Nitro System.	December 1, 2020

---

<a href="#">Mac1 instances</a>	New instances built on Apple Mac mini computers that support running macOS workloads on Amazon EC2.	November 30, 2020
<a href="#">P4d instances</a>	New accelerated computing instances that provide a high-performance platform for machine learning and HPC workloads.	November 2, 2020
<a href="#">C5ad instances</a>	New compute optimized instances featuring second-generation AMD EPYC processors.	August 13, 2020
<a href="#">C6gd, M6gd, and R6gd instances</a>	New general purpose instances powered by Amazon Graviton2 processors, which are based on 64-bit Arm Neoverse cores and custom silicon designed by Amazon for optimized performance and cost.	July 27, 2020
<a href="#">C6g and R6g instances</a>	New general purpose instances powered by Amazon Graviton2 processors, which are based on 64-bit Arm Neoverse cores and custom silicon designed by Amazon for optimized performance and cost.	June 10, 2020

---

<a href="#">C5a instances</a>	New compute optimized instances featuring second-generation AMD EPYC processors.	June 4, 2020
<a href="#">M6g instances</a>	New general purpose instances powered by Amazon Graviton2 processors, which are based on 64-bit Arm Neoverse cores and custom silicon designed by Amazon for optimized performance and cost.	May 11, 2020
<a href="#">Inf1 instances</a>	New instances featuring Amazon Inferentia, a machine learning inference chip designed to deliver high performance at a low cost.	December 3, 2019
<a href="#">G4dn instances</a>	New instances featuring NVIDIA Tesla GPUs.	September 19, 2019
<a href="#">I3en instances</a>	New I3en instances can utilize up to 100 Gbps of network bandwidth.	May 8, 2019
<a href="#">T3a instances</a>	New instances featuring AMD EPYC processors.	April 24, 2019
<a href="#">M5ad and R5ad instances</a>	New instances featuring AMD EPYC processors.	March 27, 2019
<a href="#">p3dn.24xlarge instances</a>	New instances that provide 100 Gbps of network bandwidth.	December 7, 2018

---

<a href="#">C5n instances</a>	New instances that provide up to 100 Gbps of network bandwidth.	November 26, 2018
<a href="#">A1 instances</a>	New instances featuring Arm-based processors.	November 26, 2018
<a href="#">R5a instances</a>	New instances featuring AMD EPYC processors.	November 6, 2018
<a href="#">M5a instances</a>	New instances featuring AMD EPYC processors.	November 6, 2018
<a href="#">T3 instances</a>	New instances featuring AMD EPYC processors.	August 21, 2018