

Amazon Transfer Family



Amazon Transfer Family: User Guide

Table of Contents

What is Amazon Transfer Family?	1
How Amazon Transfer Family works	4
Blog posts relevant for Transfer Family	5
Prerequisites	8
Regions, endpoints and quotas	8
Sign up for Amazon	8
Configure storage	9
Configure an Amazon S3 bucket	10
Configure an Amazon EFS file system	14
Create an IAM role and policy	17
Create a user role	19
How session policies work	22
Example read/write access policy	25
Transfer Family tutorials	29
Get started with server endpoints	30
Prerequisites	30
Step 1: Sign in to the Amazon Transfer Family console	31
Step 2: Create an SFTP-enabled server	31
Step 3: Add a service managed user	32
Step 4: Transfer a file using a client	33
Create a decryption Workflow	35
Step 1: Configure an execution role	36
Step 2: Create a managed workflow	37
Step 3: Add the workflow to a server and create a user	38
Step 4: Create a PGP key pair	40
Step 5: Store the PGP private key in Amazon Secrets Manager	41
Step 6: Encrypt a file	42
Step 7: Run the workflow and view the results	42
Create and use SFTP connectors	43
Step 1: Create the necessary supporting resources	44
Step 2: Create and test an SFTP connector	49
Step 3: Send and retrieve files using the SFTP connector	53
Procedures to create a Transfer Family server to use as your remote SFTP server	56
Use a custom identity provider	59

Prerequisites	59
Step 1: Create a CloudFormation stack	60
Step 2: Check the API Gateway method configuration for your server	61
Step 3: View the Transfer Family server details	61
Step 4: Test that your user can connect to the server	63
Step 5: Test the SFTP connection and file transfer	63
Step 6: Limit access to the bucket	64
Update Lambda if using Amazon EFS	66
Set up an AS2 configuration	67
Step 1: Create certificates for AS2	69
Step 3: Import certificates as Transfer Family certificate resources	72
Step 3: Create profiles for you and your trading partner	74
Step 4: Create a Transfer Family server that uses the AS2 protocol	74
Step 5: Create an agreement between you and your partner	78
Step 6: Create a connector between you and your partner	80
Step 7: Test exchanging files over AS2 by using Transfer Family	81
Set up a web app	83
Prerequisites	83
Step 1: Create the necessary supporting resources	83
Step 2: Create a Transfer Family web app	84
Step 3: Configure Cross-origin resource sharing (CORS) for your bucket	85
Step 4: Add a user to your Transfer Family web app	87
Step 5: Register a location in Amazon S3 and create an access grant	87
Step 6: Access your Transfer Family web app as a user	89
Integrate Okta as your identity provider for web apps	91
Transfer Family for SFTP, FTPS, FTP	95
Identity provider options	95
Amazon Transfer Family endpoint type matrix	97
Configure a Transfer Family server endpoint	101
Create an SFTP-enabled server	103
Create an FTPS-enabled server	111
Create an FTP-enabled server	119
Create a server in a VPC	127
Working with custom hostnames	148
Transfer files over server endpoint	152
Available SFTP/FTPS/FTP Commands	154

Find your Amazon VPC endpoint	156
Avoid setstat errors	157
Use OpenSSH	34
Use WinSCP	160
Use Cyberduck	34
Use FileZilla	162
Use a Perl client	164
Use LFTP	164
Post upload processing	164
SFTP messages	166
Manage users	168
Amazon EFS vs. Amazon S3	168
Logical directories	169
Enhanced HomeDirectory for logical directories	169
Active Directory group quotas	170
Service-managed users	171
Custom identity provider	180
Directory service for MS AD	214
Directory service for Entra ID	226
Use logical directories	233
Rules for using logical directories	235
Implementing logical directories and chroot	236
Configure logical directories example	239
Configure logical directories for Amazon EFS	240
Custom Amazon Lambda response	240
Transfer Family web apps	242
Amazon Web Services Regions for Transfer Family web apps	243
Browser compatibility for Amazon Transfer Family web apps	243
How to create a Transfer Family web app	243
Configure your identity provider	246
Configure IAM roles	248
Configure a Transfer Family web app	250
Create a Transfer Family web app	251
Assign or add users or groups to Transfer Family web app	253
Set up Cross-origin resource sharing (CORS) for your bucket	256
Configure Amazon S3 Access Grants	258

Use a custom URL	263
Logging for Transfer Family web apps	266
Troubleshooting your web apps	266
Troubleshoot network errors	266
Troubleshoot configured bucket not appearing	267
Troubleshoot custom URL errors	268
Troubleshoot miscellaneous errors	268
End user instructions	269
Web app quotas	269
IAM Identity Center users	270
Third-party end users	271
Transfer Family end user interface	271
Available actions	272
SFTP connectors	274
Creating SFTP connectors	274
Store credentials in Secrets Manager	275
Create an SFTP connector	276
Test an SFTP connector	286
Using SFTP connectors	287
Transfer files	288
List contents of remote directories	290
Move and delete files on the remote server	291
Monitoring SFTP connectors	293
Use the connector API to query the status of file transfer requests	294
View SFTP connector events in Amazon EventBridge	294
View SFTP connector logs in Amazon CloudWatch	294
Managing SFTP connectors	294
Update SFTP connectors	295
View SFTP connector details	295
Quotas for SFTP connectors	296
Quotas for SFTP connectors	296
Scaling your SFTP connectors	298
Reference architectures using SFTP connectors	299
Blog posts	299
Workshops	299
Solutions	299

Transfer Family for AS2	300
AS2 use cases	301
AS2 CloudFormation templates	306
Customizing AS2 templates	306
Testing your AS2 deployment	306
Best practices for AS2 template deployment	307
Configure AS2	308
AS2 configurations	309
AS2 quotas	310
AS2 features and capabilities	315
Manage AS2 certificates	316
Import AS2 certificates	317
AS2 certificate rotation	319
Create AS2 profiles	320
Create an AS2 server	321
Create an AS2 server using the Transfer Family console	322
Create an AS2 server using a template	325
Create an AS2 agreement	328
Configure AS2 connectors	330
Create an AS2 connector	331
AS2 connector algorithms	334
Basic authentication for AS2 connectors	335
Enable Basic authentication for AS2 connectors	337
View connector details	340
Transfer AS2 messages	342
Receive AS2 messages	343
Configure HTTPS for AS2	344
Transfer files with AS2 connectors	350
File names and locations	352
Status codes	355
Sample JSON files	356
Custom HTTP Headers for AS2	358
Template Overview	358
How It Works	359
Key Features	359
Implementation Details	359

Deployment and Usage	360
Monitor AS2	361
AS2 Status codes	362
AS2 error codes	363
Managing file-processing workflows	376
Create a workflow	378
Configure and run a workflow	379
View workflow details	381
Use predefined steps	384
Copy file	385
Decrypt file	390
Tag file	396
Delete file	397
Named variables for workflows	398
Example tag and delete workflow	398
Use custom file-processing steps	403
Using multiple Lambda functions consecutively	405
Accessing a file after custom processing	405
Example events sent to Amazon Lambda upon file upload	406
Example Lambda function for a custom workflow step	407
IAM permissions for a custom step	408
IAM policies for workflows	408
Workflow trust relationships	411
Example execution role: Decrypt, copy, and tag	411
Example execution role: Run function and delete	413
Exception handling for a workflow	414
Monitor workflow execution	415
CloudWatch logging for a workflow	415
CloudWatch metrics for workflows	417
Create workflow from template	418
Remove a workflow from a Transfer Family server	421
Restrictions and limits	423
Managing servers	425
View a list of servers	425
Delete a server	425
View SFTP server details	427

View AS2 server details	428
Edit server details	430
Edit the file transfer protocols	432
Edit custom identity provider parameters	434
Edit the server endpoint	436
Edit logging	438
Edit the security policy	439
Change the managed workflow	440
Change the display banners for your server	441
Put your server online or offline	441
Manage server host keys	442
Add an additional server host key	443
Delete a server host key	445
Rotate the server host keys	446
Additional server host key information	447
Monitor usage within console	448
Managing access controls	455
Creating an S3 bucket access policy	456
Creating a session policy	457
Example session policy	458
Nested substitutions for session policies	460
CloudTrail logging	462
Enabling CloudTrail logging	463
Example log entry for creating a server	464
CloudWatch logging	466
Types of CloudWatch logging for Transfer Family	466
Creating logging for servers	468
Creating logging for servers	471
Updating logging for a server	471
Viewing the server configuration	475
Managing logging for workflows	476
Configuring a role for CloudWatch	479
Viewing Transfer Family log streams	481
Creating Amazon CloudWatch alarms	485
Logging S3 API calls to S3 access logs	486
Examples to limit confused deputy problem	486

CloudWatch log structure for Transfer Family	488
JSON structured logs for Transfer Family	488
Legacy logs for Transfer Family	491
Example CloudWatch log entries	494
Example transfer sessions log entries	495
Example log entries for SFTP connectors	496
Example log entries for Key exchange algorithm failures	498
Using CloudWatch metrics	499
Transfer Family dimensions	504
User notifications	504
CloudWatch queries	504
Managing events using EventBridge	507
Transfer Family events	508
SFTP, FTPS, and FTP server events	508
SFTP connector events	509
AS2 events	510
Sending Transfer Family events	511
Creating event patterns	512
Testing event patterns for Transfer Family events	513
Permissions	513
Additional resources	514
Events detail reference	514
Server events	515
Connector events	519
AS2 events	526
Security	532
Security policies for servers	533
Cryptographic algorithms	534
TransferSecurityPolicy-2024-01	542
TransferSecurityPolicy-SshAuditCompliant-2025-02	543
TransferSecurityPolicy-2023-05	545
TransferSecurityPolicy-2022-03	546
TransferSecurityPolicy-2020-06 and TransferSecurityPolicy-Restricted-2020-06	547
TransferSecurityPolicy-2018-11 and TransferSecurityPolicy-Restricted-2018-11	548
TransferSecurityPolicy-FIPS-2024-01/TransferSecurityPolicy-FIPS-2024-05	549
TransferSecurityPolicy-FIPS-2023-05	551

TransferSecurityPolicy-FIPS-2020-06	552
Post Quantum security policies	553
Security policies for SFTP connectors	558
Post-Quantum security policies	560
About post-quantum hybrid key exchange in SSH	561
How to use it	562
How to test it	563
Data protection	566
Key management	568
Generate SSH keys	570
Rotate SSH keys	575
Generate PGP keys	577
Manage PGP keys	579
Supported PGP clients	583
Identity and access management	584
Audience	585
Authenticating with identities	586
Managing access using policies	589
How Amazon Transfer Family works with IAM	591
Identity-based policy examples	596
Tag-based policy examples	598
Troubleshooting identity and access	602
Compliance validation	604
Resilience	605
Infrastructure security	605
Web application firewall	606
Cross-service confused deputy prevention	607
Transfer Family user roles	609
Transfer Family workflow roles	611
Transfer Family connector roles	612
Transfer Family logging/invocation roles	613
Amazon managed policies	615
AWSTransferConsoleFullAccess	615
AWSTransferFullAccess	615
AWSTransferLoggingAccessV3	616
AWSTransferReadOnlyAccess	616

Policy updates	617
Terraform module	618
Troubleshooting Transfer Family	619
Authentication issues	619
Authentication failures—SSH/SFTP	620
Managed AD mismatched realms issue	620
Active Directory group limits exceeded	621
Miscellaneous authentication issues	621
Troubleshoot Amazon API Gateway issues	622
Troubleshoot testing your identity provider	624
SFTP connectivity issues	624
Troubleshoot SFTP connectivity issues	625
Troubleshoot SFTP client issues	625
Troubleshoot file upload issues	626
Custom identity provider issues	627
Troubleshoot API Gateway integration errors	627
Troubleshoot Lambda function timeouts	628
Troubleshoot consistent Lambda timeout issues	629
Troubleshoot <code>KeyError</code> exceptions	630
Workflow issues	630
Troubleshoot managed workflows issues	630
Troubleshoot workflow decryption issues	633
SFTP connector issues	636
Troubleshoot adding trusted host keys for your SFTP connector	636
Key negotiation fails	637
SFTP connector throttling	637
Optimizing SFTP connector performance	638
Miscellaneous SFTP connector issues	639
EFS issues	639
Troubleshoot Amazon EFS issues	639
Storage and encryption issues	642
Troubleshoot policies for encrypted Amazon S3 buckets	642
Troubleshoot <code>ResourceNotFound</code> exception	642
Monitoring and alerting issues	643
Troubleshoot missing or incomplete CloudWatch metrics	643
Troubleshoot missing EventBridge events	644

Cross-region transfer issues	645
Troubleshoot cross-region transfer permission issues	646
Troubleshoot cross-region transfer performance issues	647
WAF integration issues	648
Troubleshoot WAF blocking legitimate traffic	648
Troubleshoot WAF integration with custom identity providers	649
Service-managed user issues	650
Troubleshoot service-managed users	650
AS2 issues	651
Troubleshoot AS2 issues	651
AS2 certificate issues	651
AS2 MDN receipt issues	652
API reference	653
Document history	655

What is Amazon Transfer Family?

Amazon Transfer Family is a secure transfer service that enables you to transfer files into and out of Amazon storage services. Transfer Family is part of the Amazon Web Services Cloud platform. Amazon Transfer Family offers fully managed support for the transfer of files over SFTP, AS2, FTPS, FTP, and web browser-based transfers directly into and out of Amazon storage services. You can seamlessly migrate, automate, and monitor your file transfer workflows by maintaining existing client-side configurations for authentication, access, and firewalls—so nothing changes for your customers, partners, and internal teams, or their applications. See [Getting started with Amazon](#) to learn more and to start building cloud applications with Amazon Web Services.

Amazon Transfer Family supports transferring data from or to the following Amazon storage services.

- Amazon Simple Storage Service (Amazon S3) storage. For information about Amazon S3, see [Getting started with Amazon Simple Storage Service](#).
- Amazon Elastic File System (Amazon EFS) Network File System (NFS) file systems. For information about Amazon EFS, see [What is Amazon Elastic File System?](#)

Amazon Transfer Family supports transferring data over the following protocols:

- Secure File Transfer Protocol (SFTP): version 3

The official IETF document is here: [SSH File Transfer Protocol draft-ietf-secsh-filexfer-02.txt](#).

- File Transfer Protocol Secure (FTPS)
- File Transfer Protocol (FTP)
- Applicability Statement 2 (AS2)
- Browser-based transfers

Note

For FTP and FTPS data connections, the port range that Transfer Family uses to establish the data channel is 8192–8200.

File transfer protocols are used in data exchange workflows across different industries such as financial services, healthcare, advertising, and retail, among others. Transfer Family simplifies the migration of file transfer workflows to Amazon.

The following are some common use cases for using Transfer Family with Amazon S3:

- Data lakes in Amazon for uploads from third parties such as vendors and partners.
- Subscription-based data distribution with your customers.
- Internal transfers within your organization.

The following are some common use cases for using Transfer Family with Amazon EFS:

- Data distribution
- Supply chain
- Content management
- Web serving applications

The following are some common use cases for using Transfer Family with AS2:

- Workflows with compliance requirements that rely on having data protection and security features built into the protocol
- Supply chain logistics
- Payments workflows
- Business-to-business (B2B) transactions
- Integrations with enterprise resource planning (ERP) and customer relationship management (CRM) systems

The following are some common use cases for using Transfer Family web apps:

- Simplified access to data in Amazon S3 to a wider and diverse range of business users
- Centralized data access management for your workforce
- Visualization of Amazon S3 Access Grants through a managed interface

With Transfer Family, you get access to a file transfer protocol-enabled server in Amazon (or a managed file transfer web interface), without the need to run any server infrastructure. You can

use this service to migrate your file transfer-based workflows to Amazon while maintaining your end users' clients and configurations as is. For servers, you first associate your hostname with the server endpoint, then add your users and provision them with the right level of access. After you do this, your users' transfer requests are serviced directly out of your Transfer Family server endpoint.

For Transfer Family web apps, determine your configuration settings and apply optional customizations. After you do this, your users can log in and directly transfer data to and from Amazon S3.

Transfer Family provides the following benefits:

- A fully managed service that scales in real time to meet your needs.
- You don't need to modify your applications or run any file transfer protocol infrastructure.
- With your data in durable Amazon S3 storage, you can use native Amazon Web Services services for processing, analytics, reporting, auditing, and archival functions.
- With Amazon EFS as your data store, you get a fully managed elastic file system for use with Amazon Web Services Cloud services and on-premises resources. Amazon EFS is built to scale on demand to petabytes without disrupting applications, growing and shrinking automatically as you add and remove files. This helps eliminate the need to provision and manage capacity to accommodate growth.
- A fully managed, serverless File Transfer Workflow service that makes it easy to set up, run, automate, and monitor processing of files uploaded using Amazon Transfer Family.
- There are no upfront costs, and you pay only for the use of the service.

In the following sections, you can find a description of the different features of Transfer Family, a getting started tutorial, detailed instructions on how to set up the different protocol enabled servers, how to use different types of identity providers, and the service's API reference.

To get started with Transfer Family, see the following:

- [How Amazon Transfer Family works](#)
- [Prerequisites](#)
- [Getting started with Amazon Transfer Family server endpoints](#)
- [Transfer Family web apps](#)

How Amazon Transfer Family works

Amazon Transfer Family is a fully managed Amazon service that you can use to transfer files into and out of Amazon Simple Storage Service (Amazon S3) storage or Amazon Elastic File System (Amazon EFS) file systems over the following protocols or web browser:

- Secure File Transfer Protocol (SFTP): version 3

The official IETF document is here: [SSH File Transfer Protocol draft-ietf-secsh-filexfer-02.txt](#).

- File Transfer Protocol Secure (FTPS)
- File Transfer Protocol (FTP)
- Applicability Statement 2 (AS2)
- Browser-based transfers

Amazon Transfer Family supports up to 3 Availability Zones and is backed by an auto scaling, redundant fleet for your connection and transfer requests. For an example on how to build for higher redundancy and minimize network latency by using Latency-based routing, see the blog post [Minimize network latency with your Amazon transfer for SFTP servers](#).

Transfer Family Managed File Transfer Workflows (MFTW) is a fully managed, serverless File Transfer Workflow service that makes it easy to set up, run, automate, and monitor processing of files uploaded using Amazon Transfer Family. Customers can use MFTW to automate various processing steps such as copying, tagging, scanning, filtering, compressing/decompressing, and encrypting/decrypting the data that's transferred using Transfer Family. This provides end to end visibility for tracking and auditability. For more details, see [Amazon Transfer Family managed workflows](#).

Amazon Transfer Family supports any standard file transfer protocol client. Some commonly used clients are the following:

- [OpenSSH](#) – A Macintosh and Linux command line utility.
- [WinSCP](#) – A Windows-only graphical client.
- [Cyberduck](#) – A Linux, Macintosh, and Microsoft Windows graphical client.
- [FileZilla](#) – A Linux, Macintosh, and Windows graphical client.

Amazon offers the following Transfer Family workshops.

- Build a file transfer solution that leverages Amazon Transfer Family for managed SFTP/FTPS endpoints and Amazon Cognito and DynamoDB for user management. You can view the details for this workshop [here](#).
- Build a Transfer Family endpoint with AS2 enabled, and a Transfer Family AS2 connector You can view the details for this workshop [here](#).
- Build a solution that provides prescriptive guidance and a hands on lab on how you can build a scalable and secure file transfer architecture on Amazon without needing to modify existing applications or manage server infrastructure. You can view the details for this workshop [here](#).

Blog posts relevant for Transfer Family

The following table lists the blog posts that contain useful information for Transfer Family customers. The table is in reverse chronological order, so that the most recent posts are at the beginning of the table.

Blog post title and link	Date
How FICO modernizes file transfers with ETL automation using Amazon Transfer Family	April 24, 2025
Announcing Amazon Transfer Family web apps for fully managed Amazon S3 file transfers	December 1, 2024
Six tips to improve the security of your Amazon Transfer Family server	September 24, 2024
Simplify Active Directory authentication with a custom identity provider for Amazon Transfer Family	August 12, 2024
Architecting secure and compliant managed file transfers with Amazon Transfer Family SFTP connectors and PGP encryption	May 16, 2024
Using Amazon Cognito as an identity provider with Amazon Transfer Family and Amazon S3	May 14, 2024

Blog post title and link	Date
How Transfer Family can help you build a secure, compliant managed file transfer solution	January 3, 2024
Detect malware threats using Amazon Transfer Family	July 20, 2023
Extending SAP workloads with Amazon Transfer Family	July 13, 2023
Encrypt and decrypt files with PGP and Amazon Transfer Family	June 21, 2023
Authenticating to Amazon Transfer Family with Azure Active Directory and Amazon Lambda	December 15, 2022
Customize file delivery notifications using Amazon Transfer Family managed workflows	October 14, 2022
Building a cloud-native file transfer platform using Amazon Transfer Family workflows	January 5, 2022
Enabling user self-service key management with Amazon Transfer Family and Amazon Lambda.	December 17, 2021
Enhance data access control with Amazon Transfer Family and Amazon S3	October 5, 2021
Improve throughput for internet facing file transfers using Amazon Global Accelerator and Amazon Transfer Family services	June 7, 2021
Securing Amazon Transfer Family with Amazon Web Application Firewall and Amazon API Gateway	May 5, 2021

Blog post title and link	Date
Securing Amazon Transfer Family with Amazon Web Application Firewall and Amazon API Gateway	January 15, 2021
Amazon Transfer Family support for Amazon Elastic File System	January 7, 2021
Enable password authentication for Amazon Transfer Family using Amazon Secrets Manager	November 5, 2020
Centralize data access using Amazon Transfer Family and Amazon Storage Gateway	June 22, 2020
Using Amazon EFS for Amazon Lambda in your serverless applications	June 18, 2020
Use IP allow list to secure your Amazon Transfer Family servers	April 8, 2020
Minimize network latency with your Amazon transfer for SFTP servers	February 19, 2020
Lift and Shift migration of SFTP servers to Amazon	February 12, 2020
Simplify your Amazon SFTP Structure with chroot and logical directories	September 26, 2019
Using Okta as an identity provider with Amazon Transfer Family	May 30, 2019

Prerequisites

The following sections describe the prerequisites required to use the Amazon Transfer Family service. At a minimum, you need to create an Amazon Simple Storage Service (Amazon S3) bucket and provide access to that bucket through an Amazon Identity and Access Management (IAM) role. Your role also needs to establish a trust relationship. This trust relationship allows Transfer Family to assume the IAM role to access your bucket so that it can service your users' file transfer requests.

Topics

- [Supported Amazon Regions, endpoints and quotas for Transfer Family servers](#)
- [Sign up for Amazon](#)
- [Configure storage to use with Amazon Transfer Family servers](#)
- [Create an IAM role and policy](#)

Supported Amazon Regions, endpoints and quotas for Transfer Family servers

To connect programmatically to an Amazon service, you use an endpoint. For example, the endpoint for customers in US East (Ohio) region (us-east-2), is `transfer.us-east-2.amazonaws.com`. Service quotas, also referred to as limits, are the maximum number of service resources or operations for your Amazon Web Services account. In this guide, you can find quotas in [AS2 quotas](#) and [Quotas for SFTP connectors](#).

For more information about supported Amazon Regions, endpoints, and service quotas, see [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*.

For Transfer Family web apps, the supported regions are listed in [Amazon Web Services Regions for Transfer Family web apps](#). For quotas that pertain to Transfer Family web apps, see [Web app quotas](#).

Sign up for Amazon

When you sign up for Amazon Web Services (Amazon), your Amazon account is automatically signed up for all services in Amazon, including Amazon Transfer Family. You are charged only for the services that you use.

If you have an Amazon account already, skip to the next task. If you don't have an Amazon account, use the following procedure to create one.

If you do not have an Amazon Web Services account, use the following procedure to create one.

To sign up for Amazon Web Services

1. Open <http://www.amazonaws.cn/> and choose **Sign Up**.
2. Follow the on-screen instructions.

For information about pricing and to use Amazon Pricing Calculator to get an estimate of the cost to use Transfer Family, see [Amazon Transfer Family pricing](#).

For information about Amazon Region availability, see the [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*.

Configure storage to use with Amazon Transfer Family servers

This topic describes the storage options that you can use with Amazon Transfer Family. You can use either Amazon S3 or Amazon EFS as storage for your Transfer Family servers.

Contents

- [Configure an Amazon S3 bucket](#)
 - [Amazon S3 access points](#)
 - [Amazon S3 HeadObject behavior](#)
 - [Grant ability to only write and list files](#)
 - [Large number of zero-byte objects causing latency issues](#)
- [Configure an Amazon EFS file system](#)
 - [Amazon EFS file ownership](#)
 - [Set up Amazon EFS users for Transfer Family](#)
 - [Configure Transfer Family users on Amazon EFS](#)
 - [Create an Amazon EFS root user](#)
 - [Supported Amazon EFS commands](#)

Configure an Amazon S3 bucket

Amazon Transfer Family accesses your Amazon S3 bucket to service your users' transfer requests, so you need to provide an Amazon S3 bucket as part of setting up your file transfer protocol-enabled server. You can use an existing bucket, or you can create a new one.

Note

You don't have to use a server and Amazon S3 bucket that are in the same Amazon Region, but we recommend this as a best practice.

When you set up your users, you assign them each an IAM role. This role determines the level of access that they have to your Amazon S3 bucket.

For information on creating a new bucket, see [How do I create an S3 bucket?](#) in the *Amazon Simple Storage Service User Guide*.

Note

You can use Amazon S3 Object Lock to prevent objects from being overwritten for a fixed amount of time or indefinitely. This works the same way with Transfer Family as with other services. If an object exists and is protected, writing to that file or deleting it is not allowed. For more details on Amazon S3 Object Lock, see [Using Amazon S3 Object Lock](#) in the *Amazon Simple Storage Service User Guide*.

Amazon S3 access points

Amazon Transfer Family supports [Amazon S3 Access Points](#), a feature of Amazon S3 that allows you to easily manage granular access to shared data sets. You can use S3 Access Point aliases anywhere you use an S3 bucket name. You can create hundreds of access points in Amazon S3 for users who have different permissions to access shared data in an Amazon S3 bucket.

For example, you can use access points to allow three different teams to have access to the same shared dataset where one team can read data from S3, a second team can write data to S3, and the third team can read, write, and delete data from S3. To implement a granular access control as mentioned above, you can create an S3 access point that contains a policy that gives asymmetrical access to different teams. You can use S3 access points with your Transfer Family server to achieve

a fine-grained access control, without creating a complex S3 bucket policy that spans hundreds of use cases. To learn more about how to use S3 access points with a Transfer Family server, refer to the [Enhance data access control with Amazon Transfer Family and Amazon S3](#) blog post.

Note

Amazon Transfer Family does not currently support Amazon S3 Multi-Region Access Points.

Amazon S3 HeadObject behavior

Note

When you create or update a Transfer Family server, you can optimize performance for your Amazon S3 directories, which eliminates HeadObject calls.

In Amazon S3, buckets and objects are the primary resources, and objects are stored in buckets. Amazon S3 can mimic a hierarchical file system, but can sometimes behave differently than a typical file system. For example, directories are not a first-class concept in Amazon S3 but instead are based on object keys. Amazon Transfer Family infers a directory path by splitting an object's key by the forward slash character (/), treating the last element as the file name, then grouping file names which have the same prefix together under the same path. Zero-byte objects are created to represent a folder's path when you create an empty directory using `mkdir` or by using the Amazon S3 console. The key for these objects ends in a trailing forward slash. These zero-byte objects are described in [Organizing objects in the Amazon S3 console using folders](#) in the *Amazon S3 User Guide*.

When you run an `ls` command, and some results are Amazon S3 zero-byte objects (these objects have keys that end in the forward slash character), Transfer Family issues a HeadObject request for each of these objects (see [HeadObject](#) in the *Amazon Simple Storage Service API Reference* for details). This can result in the following problems when using Amazon S3 as your storage with Transfer Family.

Grant ability to only write and list files

In some cases, you might want to offer only write access to your Amazon S3 objects. For example, you might want to provide access to write (or upload) and list objects in a bucket, but not to read

(download) objects. To perform `ls` and `mkdir` commands by using file transfer clients, you must have the Amazon S3 `ListObjects` and `PutObject` permissions. However, when Transfer Family needs to make a `HeadObject` call to either write or list files, the call fails with an error of **Access denied**, because this call requires the `GetObject` permission.

Note

When you create or update a Transfer Family server, you can optimize performance for your Amazon S3 directories, which eliminates `HeadObject` calls.

In this case, you can grant access by adding an Amazon Identity and Access Management (IAM) policy condition that adds the `GetObject` permission only for objects that end in a slash (`/`). This condition prevents `GetObject` calls on files (so that they can't be read), but allows the user to list and traverse folders. The following example policy offers only write and list access to your Amazon S3 buckets. To use this policy, replace `amzn-s3-demo-bucket` with the name of your bucket.

Note

To address WinSCP's upload behavior, make sure to add the `"arn:aws-cn:s3:::amzn-s3-demo-bucket/* .filepart"` line as listed in the following example policy. This line ensures proper handling of `.filepart` objects to prevent failures.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowListing",
      "Effect": "Allow",
      "Action": "s3:ListBucket",
      "Resource": "arn:aws-cn:s3:::amzn-s3-demo-bucket"
    },
    {
      "Sid": "AllowReadWrite",
      "Effect": "Allow",
      "Action": [
        "s3:PutObject",
        "s3:GetObject",
        "s3:GetObjectVersion"
      ]
    }
  ]
}
```

```
    ],
    "Resource": [
      "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
    ]
  },
  {
    "Sid": "DenyIfNotFolder",
    "Effect": "Deny",
    "Action": [
      "s3:GetObject",
      "s3:GetObjectVersion"
    ],
    "NotResource": [
      "arn:aws-cn:s3:::amzn-s3-demo-bucket/*/",
      "arn:aws-cn:s3:::amzn-s3-demo-bucket/*.*filepart"
    ]
  }
]
```

Note

This policy doesn't allow users to append files. In other words, a user who is assigned this policy can't open files to add content to them, or to modify them. Additionally, if your use case requires a `HeadObject` call before uploading a file, this policy won't work for you.

Large number of zero-byte objects causing latency issues

If your Amazon S3 buckets contain a large number of these zero-byte objects, Transfer Family issues a lot of `HeadObject` calls, which can result in processing delays. The recommended solution for this issue is to enable **Optimized Directories** to reduce latency.

For example, suppose that you go into your home directory, and you have 10,000 subdirectories. In other words, your Amazon S3 bucket has 10,000 folders. In this scenario, if you run the `ls` (list) command, the list operation takes between six and eight minutes. However, if you optimize your directories, this operation takes only a few seconds. You set this option in the **Configure additional details** screen during the server creation or update procedure. These procedures are detailed under the [Configuring an SFTP, FTPS, or FTP server endpoint](#) topic.

Note

GUI clients may issue an `ls` command outside your control, so it is important to enable this setting if you can.

If you don't or can't optimize your directories, an alternate solution to this problem is to delete all of your zero-byte objects. Note the following:

- Empty directories will no longer exist. Directories only exist as a result of their names being in the key of an object.
- Doesn't prevent someone from calling `mkdir` and breaking things all over again. You could mitigate this by crafting a policy which prevents directory creation.
- Some scenarios make use of these 0-byte objects. For example, you have a structure like `/inboxes/customer1000` and the inbox directory gets cleaned every day.

Finally, one more possible solution is to limit the number of objects visible through a policy condition to reduce the number of `HeadObject` calls. For this to be a workable solution, you need to accept that you might only be able to view a limited set of all of your sub-directories.

Configure an Amazon EFS file system

Amazon Transfer Family accesses Amazon Elastic File System (Amazon EFS) to service your users' transfer requests. So you must provide an Amazon EFS file system as part of setting up your file transfer protocol-enabled server. You can use an existing file system, or you can create a new one.

Note the following:

- When you use a Transfer Family server and an Amazon EFS file system, the server and the file system must be in the same Amazon Web Services Region.
- The server and the file system don't need to be in the same account. If the server and file system are not in the same account, the file system policy must give explicit permission to the user role.

For information about how to set up multiple accounts, see [Managing the Amazon accounts in your organization](#) in the *Amazon Organizations User Guide*.

- When you set up your users, you assign them each an IAM role. This role determines the level of access that they have to your Amazon EFS file system.

- For details on mounting an Amazon EFS file system, see [Mounting Amazon EFS file systems](#).

For more details on how Amazon Transfer Family and Amazon EFS work together, see [Using Amazon Transfer Family to access files in your Amazon EFS file system](#) in the *Amazon Elastic File System User Guide*.

Amazon EFS file ownership

Amazon EFS uses the Portable Operating System Interface (POSIX) file permission model to represent file ownership.

In POSIX, users in the system are categorized into three distinct permission classes: When you allow a user to access files stored in an Amazon EFS file system using Amazon Transfer Family, you must assign them a "POSIX profile." This profile is used to determine their access to files and directories in the Amazon EFS file system.

- User (u): Owner of the file or directory. Usually, the creator of a file or directory is also the owner.
- Group (g): Set of users that need identical access to files and directories that they share.
- Others (o): All other users that have access to the system except for the owner and group members. This permission class is also referred to as "Public."

In the POSIX permission model, every file system object (files, directories, symbolic links, named pipes, and sockets) is associated with the previously mentioned three sets of permissions. Amazon EFS objects have a Unix-style mode associated with them. This mode value defines the permissions for performing actions on that object.

Additionally, on Unix-style systems, users and groups are mapped to numeric identifiers, which Amazon EFS uses to represent file ownership. For Amazon EFS, objects are owned by a single owner and a single group. Amazon EFS uses the mapped numeric IDs to check permissions when a user attempts to access a file system object.

Set up Amazon EFS users for Transfer Family

Before you set up your Amazon EFS users, you can do either of the following:

- You can create users and set up their home folders in Amazon EFS. See [Configure Transfer Family users on Amazon EFS](#) for details.
- If you are comfortable adding a root user, you can [Create an Amazon EFS root user](#).

Note

Transfer Family servers do not support Amazon EFS access points to set POSIX permissions. Transfer Family users' POSIX profiles (described in the preceding section) offer the ability to set POSIX permissions. These permissions are set at a user level, for granular access, based on UID, GID, and secondary GIDs.

Configure Transfer Family users on Amazon EFS

Transfer Family maps the users to the UID/GID and directories you specify. If the UID/GID/directories do not already exist in EFS, then you should create them before assigning them in Transfer to a user. The details for creating Amazon EFS users is described in [Working with users, groups, and permissions at the Network File System \(NFS\) Level](#) in the *Amazon Elastic File System User Guide*.

Steps to set up Amazon EFS users in Transfer Family

1. Map the EFS UID and GID for your user in Transfer Family using the [PosixProfile](#) fields.
2. If you want the user to start in a specific folder upon login, you can specify the EFS directory under the [HomeDirectory](#) field.

You can automate the process, by using a CloudWatch rule and Lambda function. For an example Lambda function that interacts with EFS, see [Using Amazon EFS for Amazon Lambda in your serverless applications](#).

Additionally, you can configure logical directories for your Transfer Family users. For details, see the [Configure logical directories for Amazon EFS](#) section in the [Using logical directories to simplify your Transfer Family directory structures](#) topic.

Create an Amazon EFS root user

If your organization is comfortable for you to enable root user access via SFTP/FTPS for the configuration of your users, you can create a user who's UID and GID are 0 (root user), then use that root user to create folders and assign POSIX ID owners for rest of the users. The advantage of this option is that there is no need to mount the Amazon EFS file system.

Perform the steps described in [Adding Amazon EFS service-managed users](#), and for both the User ID and Group ID, enter 0 (zero).

Tip

Don't let this superuser account exist for longer than necessary. Or, if you do keep the root user account, make sure that you keep it well protected.

Supported Amazon EFS commands

The following commands are supported for Amazon EFS for Amazon Transfer Family.

- `cd`
- `ls/dir`
- `pwd`
- `put`
- `get`
- `rename`
- `chown`: Only root (that is, users with `uid=0`) can change ownership and permissions of files and directories.
- `chmod`: Only root can change ownership and permissions of files and directories.
- `chgrp`: Supported either for root or for the file's owner who can only change a file's group to be one of their secondary groups.
- `ln -s/symlink`
- `mkdir`
- `rm/delete`
- `rmdir`
- `chmtime`

Create an IAM role and policy

This topic describes the types of policies and roles that can be used with Amazon Transfer Family, and walks through the process of creating a user role. It also describes how session policies work and provides an example user role.

Amazon Transfer Family uses the following types of roles:

- **User role** – Allows service-managed users to access the necessary Transfer Family resources. Amazon Transfer Family assumes this role in the context of a Transfer Family user ARN.
- **Access role** – Provides access to only the Amazon S3 files that are being transferred. For inbound AS2 transfers, the access role uses the Amazon Resource Name (ARN) for the agreement. For outbound AS2 transfers, the access role uses the ARN for the connector.
- **Invocation role** – For use with Amazon API Gateway as the server's custom identity provider. Transfer Family assumes this role in the context of a Transfer Family server ARN.
- **Logging role** – Used to log entries into Amazon CloudWatch. Transfer Family uses this role to log success and failure details along with information about file transfers. Transfer Family assumes this role in the context of a Transfer Family server ARN. For outbound AS2 transfers, the logging role uses the connector ARN.
- **Execution role** – Allows a Transfer Family user to call and launch workflows. Transfer Family assumes this role in the context of a Transfer Family workflow ARN.

In addition to these roles, you can also use *session policies*. A session policy is used to limit access when necessary. Note that these policies are stand-alone: that is, you don't add these policies to a role. Rather, you add a session policy directly to a Transfer Family user.

Note

When you are creating a service-managed Transfer Family user, you can select **Auto-generate policy based on home folder**. This is a useful shortcut if you want to limit user access to their own folders. Also, you can view details about session policies and an example in [How session policies work](#). You can also find more information about session policies in [Session policies](#) in the *IAM User Guide*.

Topics

- [Create a user role](#)
- [How session policies work](#)
- [Example read/write access policy](#)

Create a user role

When you create a user, you make a number of decisions about user access. These decisions include which Amazon S3 buckets or Amazon EFS file systems that the user can access, what portions of each Amazon S3 bucket and which files in the file system are accessible, and what permissions the user has (for example, PUT or GET).

To set access, you create an identity-based Amazon Identity and Access Management (IAM) policy and role that provide that access information. As part of this process, you provide access for your user to the Amazon S3 bucket or Amazon EFS file system that is the target or source for file operations. To do this, take the following high-level steps, described in detail later:

Create a user role

1. Create an IAM policy for Amazon Transfer Family. This is described in [To create an IAM policy for Amazon Transfer Family](#).
2. Create an IAM role and attach the new IAM policy. For an example, see [Example read/write access policy](#).
3. Establish a trust relationship between Amazon Transfer Family and the IAM role. This is described in [To establish a trust relationship](#).

The following procedures describe how to create an IAM policy and role.

To create an IAM policy for Amazon Transfer Family

1. Open the IAM console at <https://console.amazonaws.cn/iam/>.
2. In the navigation pane, choose **Policies**, and then choose **Create policy**.
3. On the **Create Policy** page, choose the **JSON** tab.
4. In the editor that appears, replace the contents of the editor with the IAM policy that you want attach to the IAM role.

You can grant read/write access or restrict users to their home directory. For more information, see [Example read/write access policy](#).

5. Choose **Review policy** and provide a name and description for your policy, and then choose **Create policy**.

Next, you create an IAM role and attach the new IAM policy to it.

To create an IAM role for Amazon Transfer Family

1. In the navigation pane, choose **Roles**, and then choose **Create role**.

On the **Create role** page, make sure that **Amazon service** is chosen.

2. Choose **Transfer** from the service list, and then choose **Next: Permissions**. This establishes a trust relationship between Amazon Transfer Family and Amazon.
3. In the **Attach permissions policies** section, locate and choose the policy that you just created, and choose **Next: Tags**.
4. (Optional) Enter a key and value for a tag, and choose **Next: Review**.
5. On the **Review** page, enter a name and description for your new role, and then choose **Create role**.

Next, you establish a trust relationship between Amazon Transfer Family and Amazon.

To establish a trust relationship

Note

In our examples, we use both `ArnLike` and `ArnEquals`. They are functionally identical, and therefore you may use either when you construct your policies. Transfer Family documentation uses `ArnLike` when the condition contains a wildcard character, and `ArnEquals` to indicate an exact match condition.

1. In the IAM console, choose the role that you just created.
2. On the **Summary** page, choose **Trust relationships**, and then choose **Edit trust relationship**.
3. In the **Edit Trust Relationship** editor, make sure **service** is `"transfer.amazonaws.com"`. The access policy is shown following.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      }
    }
  ],
```

```

    "Action": "sts:AssumeRole"
  }
]
}

```

We recommend that you use the `aws:SourceAccount` and `aws:SourceArn` condition keys to protect yourself against the confused deputy problem. The source account is the owner of the server and the source ARN is the ARN of the user. For example:

```

"Condition": {
  "StringEquals": {
    "aws:SourceAccount": "account_id"
  },
  "ArnLike": {
    "aws:SourceArn": "arn:aws-cn:transfer:region:account_id:user/*"
  }
}

```

You can also use the `ArnLike` condition if you are looking to restrict to a particular server instead of any server in the user account. For example:

```

"Condition": {
  "ArnLike": {
    "aws:SourceArn": "arn:aws-cn:transfer:region:account-id:user/server-id/*"
  }
}

```

Note

In the examples above, replace each *user input placeholder* with your own information.

For details on the confused deputy problem and more examples, see [Cross-service confused deputy prevention](#).

4. Choose **Update Trust Policy** to update the access policy.

You have now created an IAM role that allows Amazon Transfer Family to call Amazon services on your behalf. You attached to the role the IAM policy that you created to give access to your user. In the [Getting started with Amazon Transfer Family server endpoints](#) section, this role and policy are assigned to your user or users.


See also

- For more general information about IAM roles, see [Creating a role to delegate permissions to an Amazon service](#) in the *IAM User Guide*.
- To learn more about identity-based policies for Amazon S3 resources, see [Identity and access management in Amazon S3](#) in the *Amazon Simple Storage Service User Guide*.
- To learn more about identity-based policies for Amazon EFS resources, see [Using IAM to control file system data access](#) in the *Amazon Elastic File System User Guide*.

How session policies work

When an administrator creates a role, the role often includes broad permissions to cover multiple use cases or team members. If an administrator configures a [console URL](#), they can reduce permissions for the resulting session by using a *session policy*. For example, if you create a role with [read/write access](#), you can set up a URL that limits users' access to only their home directories.

Session policies are advanced policies that you pass as a parameter when you programmatically create a temporary session for a role or user. Session policies are useful for locking down users so that they have access only to portions of your bucket where object prefixes contain their username. The following diagram shows that the session policy's permissions are the intersection of the session policies and the resource-based policies plus the intersection of the session policies and identity-based policies.

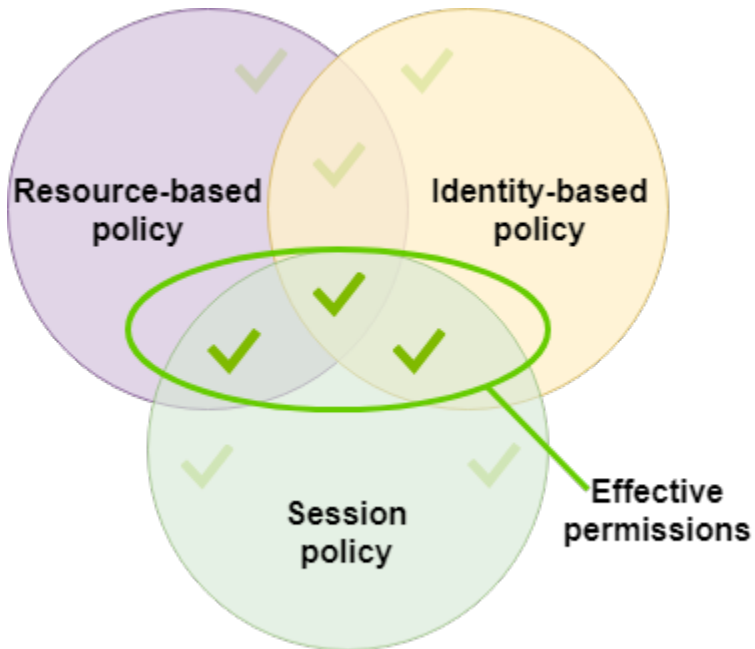

For more details, see [Session policies](#) in the *IAM User Guide*.

In Amazon Transfer Family, a session policy is supported only when you are transferring to or from Amazon S3. The following example policy is a session policy that limits users' access to their home directories only. Note the following:

- The `GetObjectACL` and `PutObjectACL` statements are only required if you need to enable Cross Account Access. That is, your Transfer Family server needs to access a bucket in a different account.
- The maximum length of a session policy is 2048 characters. For more details, see the [Policy request parameter](#) for the `CreateUser` action in the *API reference*.
- If your Amazon S3 bucket is encrypted using Amazon Key Management Service (Amazon KMS), you must specify additional permissions in your policy. For details, see [Data protection and encryption](#).

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowListingOfUserFolder",
      "Action": [
        "s3:ListBucket"
      ],
    }
  ],
}
```

```

    "Effect": "Allow",
    "Resource": [
      "arn:aws-cn:s3:::${transfer:HomeBucket}"
    ],
    "Condition": {
      "StringLike": {
        "s3:prefix": [
          "${transfer:HomeFolder}/*",
          "${transfer:HomeFolder}"
        ]
      }
    }
  },
  {
    "Sid": "HomeDirObjectAccess",
    "Effect": "Allow",
    "Action": [
      "s3:PutObject",
      "s3:GetObject",
      "s3:DeleteObject",
      "s3:DeleteObjectVersion",
      "s3:GetObjectVersion",
      "s3:GetObjectACL",
      "s3:PutObjectACL"
    ],
    "Resource": "arn:aws-cn:s3:::${transfer:HomeDirectory}/*"
  }
]
}

```

Note

The preceding policy example assumes that users have their home directories set to include a trailing slash, to signify that it is a directory. If, on the other hand, you set a user's `HomeDirectory` without the trailing slash, then you should include it as part of your policy.

In the previous example policy, note the use of the `transfer:HomeFolder`, `transfer:HomeBucket`, and `transfer:HomeDirectory` policy parameters. These parameters

are set for the HomeDirectory that is configured for the user, as described in [HomeDirectory](#) and [Implementing your API Gateway method](#). These parameters have the following definitions:

- The `transfer:HomeBucket` parameter is replaced with the first component of HomeDirectory.
- The `transfer:HomeFolder` parameter is replaced with the remaining portions of the HomeDirectory parameter.
- The `transfer:HomeDirectory` parameter has the leading forward slash (/) removed so that it can be used as part of an S3 Amazon Resource Name (ARN) in a Resource statement.

Note

If you are using logical directories—that is, the user's `homeDirectoryType` is LOGICAL—these policy parameters (`HomeBucket`, `HomeDirectory`, and `HomeFolder`) are not supported.

For example, assume that the HomeDirectory parameter that is configured for the Transfer Family user is `/home/bob/amazon/stuff/`.

- `transfer:HomeBucket` is set to `/home`.
- `transfer:HomeFolder` is set to `/bob/amazon/stuff/`.
- `transfer:HomeDirectory` becomes `home/bob/amazon/stuff/`.

The first "Sid" allows the user to list all directories starting from `/home/bob/amazon/stuff/`.

The second "Sid" limits the user's put and get access to that same path, `/home/bob/amazon/stuff/`.

Example read/write access policy

Grant read/write access to Amazon S3 bucket

The following example policy for Amazon Transfer Family grants read/write access to objects in your Amazon S3 bucket.

Note the following:

- Replace `amzn-s3-demo-bucket` with the name of your Amazon S3 bucket.
- The `GetObjectACL` and `PutObjectACL` statements are only required if you need to enable Cross Account Access. That is, your Transfer Family server needs to access a bucket in a different account.
- The `GetObjectVersion` and `DeleteObjectVersion` statements are only required if versioning is enabled on the Amazon S3 bucket that is being accessed.

Note

If you have *ever* enabled versioning for your bucket, then you need these permissions, as you can only suspend versioning in Amazon S3, and not turn it off completely. For details, see [Unversioned, versioning-enabled, and versioning-suspended buckets](#).

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowListingOfUserFolder",
      "Action": [
        "s3:ListBucket",
        "s3:GetBucketLocation"
      ],
      "Effect": "Allow",
      "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-bucket"
      ]
    },
    {
      "Sid": "HomeDirObjectAccess",
      "Effect": "Allow",
      "Action": [
        "s3:PutObject",
        "s3:GetObject",
        "s3>DeleteObject",
        "s3>DeleteObjectVersion",
        "s3:GetObjectVersion",
        "s3:GetObjectACL",
        "s3:PutObjectACL"
      ]
    }
  ]
}
```

```

        "Resource": "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
    }
]
}

```

Grant file system access to files in Amazon EFS file system

Note

In addition to the policy, you must also make sure your POSIX file permissions are granting the appropriate access. For more information, see [Working with users, groups, and permissions at the Network File System \(NFS\) Level](#) in the *Amazon Elastic File System User Guide*.

The following example policy grants root file system access to files in your Amazon EFS file system.

Note

In the following examples, replace *region* with your region, *account-id* with the account the file is in, and *file-system-id* with the ID of your Amazon Elastic File System (Amazon EFS).

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "RootFileSystemAccess",
      "Effect": "Allow",
      "Action": [
        "elasticfilesystem:ClientRootAccess",
        "elasticfilesystem:ClientMount",
        "elasticfilesystem:ClientWrite"
      ],
      "Resource": "arn:aws-cn:elasticfilesystem:region:account-id:file-
system/file-system-id"
    }
  ]
}

```



```
}
```

The following example policy grants user file system access to files in your Amazon EFS file system.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "UserFileSystemAccess",
      "Effect": "Allow",
      "Action": [
        "elasticfilesystem:ClientMount",
        "elasticfilesystem:ClientWrite"
      ],
      "Resource": "arn:aws-cn:elasticfilesystem:region:account-id:file-
system/file-system-id"
    }
  ]
}
```

Transfer Family tutorials

The Amazon Transfer Family user guide provides detailed walkthroughs for several use cases.

- [Getting started with Amazon Transfer Family server endpoints](#): this tutorial walks you through creating an SFTP Transfer Family server and service-managed user, then shows how to transfer a file using a client.
- [Setting up and using SFTP connectors](#): this tutorial illustrates how to set up an SFTP connector, and then transfer files between Amazon S3 storage and an SFTP server.
- [Setting up an Amazon API Gateway method as a custom identity provider](#): this tutorial illustrates how to set up an Amazon API Gateway method and use it as a custom identity provider to upload files to an Amazon Transfer Family server.
- [Setting up a managed workflow for decrypting a file](#): this tutorial illustrates how to set up a managed workflow that contains a decrypt step, and how to upload an encrypted file to an Amazon S3 bucket and then view the decrypted file.
- [Setting up an AS2 configuration](#): this tutorial walks through the steps needed to configure an AS2 Transfer Family server. There are instructions for importing certificates, creating profiles and agreements, optionally creating an AS2 connector, and then testing the configuration.
- [Setting up a Transfer Family web app](#): this tutorial walks through the steps needed to create and configure a Transfer Family web app.

Topics

- [Getting started with Amazon Transfer Family server endpoints](#)
- [Setting up a managed workflow for decrypting a file](#)
- [Setting up and using SFTP connectors](#)
- [Setting up an Amazon API Gateway method as a custom identity provider](#)
- [Setting up an AS2 configuration](#)
- [Setting up a Transfer Family web app](#)

Getting started with Amazon Transfer Family server endpoints

Use this tutorial to get started with Amazon Transfer Family (Transfer Family). You'll learn how to create an SFTP-enabled server with publicly accessible endpoint using Amazon S3 storage, add a user with service-managed authentication, and transfer a file with Cyberduck.

Topics

- [Prerequisites](#)
- [Step 1: Sign in to the Amazon Transfer Family console](#)
- [Step 2: Create an SFTP-enabled server](#)
- [Step 3: Add a service managed user](#)
- [Step 4: Transfer a file using a client](#)

Prerequisites

Before you begin, be sure to complete the requirements in [Prerequisites](#). As part of this setup, you create an Amazon Simple Storage Service (Amazon S3) bucket and an Amazon Identity and Access Management (IAM) user role.

There are permissions required for using the Amazon Transfer Family console, and there are permissions required for configuring other Amazon services that Transfer Family uses, such as Amazon Simple Storage Service, Amazon Certificate Manager, Amazon Elastic File System, and Amazon Route 53. For example, for users that are transferring files into and out of Amazon using Transfer Family, **AmazonS3FullAccess** grants permissions to setup and use an Amazon S3 bucket. Some of the permissions in this policy are needed to create Amazon S3 buckets.

To use the Transfer Family console, you require the following:

- **AWSTransferConsoleFullAccess** grants permissions for your SFTP user to create Transfer Family resources.
- **IAMFullAccess** (or specifically a policy that allows creation of IAM roles) is only needed if you want Transfer Family to automatically create a logging role for your server in Amazon CloudWatch Logs or a user role for a user logging into a server.
- To create and delete VPC server types, you need to add the actions **ec2:CreateVpcEndpoint** and **ec2>DeleteVpcEndpoints** to your policy.

Note

The **AmazonS3FullAccess** and **IAMFullAccess** policies are, themselves, not needed for general usage of Amazon Transfer Family. They are presented here as a simple way to make sure that all of the permissions that you need are covered. Additionally, these are Amazon managed policies, which are standard policies that are available to all Amazon customers. You can view the individual permissions in these policies and determine a minimal set that you need for your purposes.

Step 1: Sign in to the Amazon Transfer Family console

To sign in to Transfer Family

1. Sign in to the Amazon Web Services Management Console and open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. For **Account ID or alias**, enter the ID for your Amazon Web Services account.
3. For **IAM user name**, enter the name of the user role that you created for Transfer Family.
4. For **Password**, enter your Amazon account password.
5. Choose **Sign in**.


Step 2: Create an SFTP-enabled server

Secure Shell (SSH) File Transfer Protocol (SFTP) is a network protocol used for secure transfer of data over the internet. The protocol supports the full security and authentication functionality of SSH. It is widely used to exchange data, including sensitive information between business partners in a variety of industries such as financial services, healthcare, retail, and advertising.

To create an SFTP-enabled server

1. Select **Servers** from the Navigation pane then choose **Create server**.
2. In **Choose protocols**, select **SFTP**, and then choose **Next**.
3. In **Choose an identity provider**, choose **Service managed** to store user identities and keys in Transfer Family, and then choose **Next**.
4. In **Choose an endpoint**, do the following:

- a. For **Endpoint type**, choose the **Publicly accessible** endpoint type.
 - b. For **Custom hostname**, choose **None**.
 - c. Choose **Next**.
5. In **Choose a domain**, choose **Amazon S3**.
 6. In **Configure additional details**, for **Cryptographic algorithm options**, choose a security policy that contains the cryptographic algorithms enabled for use by your server. Our latest security policy is the default: for details, see [Security policies for Amazon Transfer Family servers](#).

 **Note**

Only if you are adding a managed workflow for your server, choose **Create a new role** for **CloudWatch logging**. To log server events, you do not need to create an IAM role.

7. In **Review and create**, choose **Create server**. You are taken to the **Servers** page.

It can take a couple of minutes before the status for your new server changes to **Online**. At that point, your server can perform file operations, but you'll need to create a user first. For details on creating users, see [Managing users for server endpoints](#).

Step 3: Add a service managed user

To add a user to the SFTP-enabled server

1. On the **Servers** page, select the server that you want to add a user to.
2. Choose **Add user**.
3. In the **User configuration** section, for **Username**, enter the username. This username must be a minimum of 3 and a maximum of 100 characters. You can use the following characters in the username: a–z, A–Z, 0–9, underscore '_', hyphen '-', period '.' and at sign '@'. The username can't start with a hyphen '-', period '.' or at sign '@'.
4. For **Access**, choose the IAM role that you created in [Create an IAM role and policy](#). This IAM role includes an IAM policy that contains permissions to access your Amazon S3 bucket, as well as a trust relationship with the Amazon Transfer Family service. The procedure outlined in [To establish a trust relationship](#) shows how to establish the proper trust relationship.
5. For **Policy**, choose **None**.

6. For **Home directory**, choose the Amazon S3 bucket where you want to store the data that you transfer using Amazon Transfer Family. Enter the path to the home directory. This is the directory that your users see when they log in using their client.

We recommend using a directory path that contains the username so that you have the option to use a session policy. A session policy limits a user's access in the Amazon S3 bucket to that user's home directory. For more information about using session policies, see [How session policies work](#).

If you prefer, you can keep this parameter blank to use your Amazon S3 bucket's root directory. If you choose this option, make sure that your IAM role provides access to the root directory.

7. Select the **Restricted** check box to prevent your users from accessing anything outside of their home directory. This also prevents users from seeing the Amazon S3 bucket name or folder name.
8. For **SSH public key**, enter the public SSH key portion of the SSH key pair in `ssh-rsa <string>` format.

Your key must be validated by the service before you can add your new user. For more information about how to generate an SSH key pair, see [Generate SSH keys for service-managed users](#).

9. (Optional) For **Key** and **Value**, enter one or more tags as key-value pairs, and choose **Add tag**.
10. Choose **Add** to add your new user to the server that you chose.

The new user appears in the **Users** section of the **Server details** page.

Step 4: Transfer a file using a client

You transfer files over the Amazon Transfer Family service by specifying the transfer operation in a client. Amazon Transfer Family supports several clients. For details, see [Transferring files over a server endpoint using a client](#)

This section contains procedures for using Cyberduck and OpenSSH.

Topics

- [Use Cyberduck](#)
- [Use OpenSSH](#)

Use Cyberduck

To transfer files over Amazon Transfer Family using Cyberduck

1. Open the [Cyberduck](#) client.
2. Choose **Open Connection**.
3. In the **Open Connection** dialog box, choose **SFTP (SSH File Transfer Protocol)**.
4. For **Server**, enter your server endpoint. The server endpoint is located on the **Server details** page, see [View SFTP, FTPS, and FTP server details](#).
5. For **Port number**, enter **22** for SFTP.
6. For **Username**, enter the name for the user that you created in [Managing users for server endpoints](#).
7. For **SSH Private Key**, choose or enter the SSH private key.
8. Choose **Connect**.
9. Perform your file transfer.

Depending on where your files are, do one of the following:

- In your local directory (the source), choose the files that you want to transfer, and drag and drop them into the Amazon S3 directory (the target).
- In the Amazon S3 directory (the source), choose the files that you want to transfer, and drag and drop them into your local directory (the target).

Use OpenSSH

Use the instructions that follow to transfer files from the command line using OpenSSH.

Note

This client works only with an SFTP-enabled server.

To transfer files over Amazon Transfer Family using the OpenSSH command line utility

1. On Linux or Macintosh, open a command terminal.

2. At the prompt, enter the following command: `% sftp -i transfer-key sftp_user@service_endpoint`

In the preceding command, `sftp_user` is the username and `transfer-key` is the SSH private key. Here, `service_endpoint` is the server's endpoint as shown in the Amazon Transfer Family console for the selected server.

An `sftp` prompt should appear.

3. (Optional) To view the user's home directory, enter the following command at the `sftp` prompt: `sftp> pwd`
4. On the next line, enter the following text: `sftp> cd /amzn-s3-demo-bucket/home/sftp_user`

In this getting-started exercise, this Amazon S3 bucket is the target of the file transfer.

5. On the next line, enter the following command: `sftp> put filename.txt`

The `put` command transfers the file into the Amazon S3 bucket.

A message like the following appears, indicating that the file transfer is in progress, or complete.

```
Uploading filename.txt to /amzn-s3-demo-bucket/home/sftp_user/
filename.txt
```

```
some-file.txt 100% 127 0.1KB/s 00:00
```

Setting up a managed workflow for decrypting a file

This tutorial illustrates how to set up a managed workflow that contains a decrypt step. The tutorial also shows how to upload an encrypted file to an Amazon S3 bucket and then view the decrypted file in that same bucket.

Note

The Amazon storage blog has a post that describes how to simply decrypt files without writing any code using Transfer Family Managed workflows, [Encrypt and decrypt files with PGP and Amazon Transfer Family](#).

Topics

- [Step 1: Configure an execution role](#)
- [Step 2: Create a managed workflow](#)
- [Step 3: Add the workflow to a server and create a user](#)
- [Step 4: Create a PGP key pair](#)
- [Step 5: Store the PGP private key in Amazon Secrets Manager](#)
- [Step 6: Encrypt a file](#)
- [Step 7: Run the workflow and view the results](#)

Step 1: Configure an execution role

Create an Amazon Identity and Access Management (IAM) execution role that Transfer Family can use to launch a workflow. The process of creating an execution role is described in [IAM policies for workflows](#).

Note

As part of creating an execution role, make sure to establish a trust relationship between the execution role and Transfer Family, as described in [To establish a trust relationship](#).

The following execution role policy contains all the required permissions to start the workflow that you create in this tutorial. To use this example policy, replace the *user input placeholders* with your own information. Replace `amzn-s3-demo-bucket` with the name of the Amazon S3 bucket where you upload your encrypted files.

Note

Not every workflow requires every permission that's listed in this example. You can restrict permissions based on the types of steps in your specific workflow. The permissions needed for each predefined step type are described in [Use predefined steps](#). The permissions needed for a custom step are described in [IAM permissions for a custom step](#).

```
{
```

```

"Version": "2012-10-17",
"Statement": [{
  "Sid": "WorkflowsS3Permissions",
  "Effect": "Allow",
  "Action": [
    "s3:GetObject",
    "s3:GetObjectTagging",
    "s3:GetObjectVersion",
    "s3:PutObject",
    "s3:PutObjectTagging",
    "s3:ListBucket",
    "s3:PutObjectTagging",
    "s3:PutObjectVersionTagging",
    "s3:DeleteObjectVersion",
    "s3:DeleteObject"
  ],
  "Resource": [
    "arn:aws-cn:s3:::amzn-s3-demo-bucket/*",
    "arn:aws-cn:s3:::amzn-s3-demo-bucket"
  ]
},
{
  "Sid": "DecryptSecret",
  "Effect": "Allow",
  "Action": ["secretsmanager:GetSecretValue"],
  "Resource": "arn:aws-cn:secretsmanager:region:account-id:secret:aws/
transfer/*"
}
]
}

```


Step 2: Create a managed workflow

Now you need to create a workflow that contains a decrypt step.

To create a workflow that contains a decrypt step

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Workflows**, and then choose **Create workflow**.
3. Enter the following details:
 - Enter a description, for example **Decrypt workflow example**.

- In the **Nominal steps** section, choose **Add step**.
4. For **Choose step type**, choose **Decrypt file**, and then choose **Next**.
5. In the **Configure parameters** dialog box, specify the following:
 - Enter a descriptive step name, for example, **decrypt-step**. Spaces are not allowed in step names.
 - For the **Destination for decrypted files**, choose Amazon S3.
 - For the **Destination bucket name**, choose the same Amazon S3 bucket that you specified as the `amzn-s3-demo-bucket` in the IAM policy that you created in Step 1.
 - For the **Destination key prefix**, enter the name of the prefix (folder) where you want to store your decrypted files in your destination bucket, for example, **decrypted-files/**.

 **Note**

Make sure to add a trailing slash (/) to your prefix.

- For this tutorial, leave **Overwrite existing** cleared. When this setting is cleared, if you try to decrypt a file with the identical name of an existing file, the workflow processing stops, and the new file is not processed.

Choose **Next** to move to the review screen.

6. Review the details for the step. If everything is correct, choose **Create step**.
7. Your workflow needs only the single decrypt step, so there are no additional steps to configure. Choose **Create workflow** to create the new workflow.

Note the workflow ID for your new workflow. You will need this ID for the next step. This tutorial uses `w-1234abcd5678efghi` as the example workflow ID.

Step 3: Add the workflow to a server and create a user

Now that you have a workflow with a decrypt step, you must associate it with a Transfer Family server. This tutorial shows how to attach the workflow to an existing Transfer Family server. Alternatively, you can create a new server to use with your workflow.

After you attach the workflow to a server, you must create a user that can SFTP into the server and trigger the workflow to run.

To configure a Transfer Family server to run a workflow

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Servers**, and then choose a server from the list. Make sure that this server supports the SFTP protocol.
3. On the details page for the server, scroll down to the **Additional details** section, and then choose **Edit**.
4. On the **Edit additional details** page, in the **Managed workflows** section, choose your workflow, and choose a corresponding execution role.
 - For **Workflow for complete file uploads**, choose the workflow that you created in [Step 2: Create a managed workflow](#), for example, `w-1234abcd5678efghi`.
 - For **Managed workflows execution role**, choose the IAM role that you created in [Step 1: Configure an execution role](#).
5. Scroll to the bottom of the page, and choose **Save** to save your changes.

Note the ID for the server that you are using. The name of the Amazon Secrets Manager secret that you use to store your PGP keys is based in part on the server ID.

To add a user that can trigger the workflow

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Servers**, and then choose the server that you're using for the decrypt workflow.
3. On the server details page, scroll down to the **Users** section, and choose **Add user**.
4. For your new user, enter the following details:
 - For **Username**, enter `decrypt-user`.
 - For **Role**, choose a user role that can access your server.
 - For **Home directory**, choose the Amazon S3 bucket that you used earlier, for example, `amzn-s3-demo-bucket`.
 - For **SSH public keys**, paste in a public key that corresponds to a private key that you have. For details, see [Generate SSH keys for service-managed users](#).
5. Choose **Add** to save your new user.

Note the name of your Transfer Family user for this server. The secret is partially based on the name of the user. For simplicity, this tutorial uses a default secret that can be used by any user of the server.

Step 4: Create a PGP key pair

Use one of the [supported PGP clients](#) to generate a PGP key pair. This process is described in detail in [Generate PGP keys](#).

To generate a PGP key pair

1. For this tutorial, you can use gpg (GnuPG) version 2.0.22 client to generate a PGP key pair that uses RSA as the encryption algorithm. For this client, run the following command, and provide an email address and a passphrase. You can use any name or email address that you like. Make sure that you remember the values that you use, because you will need to enter them later in the tutorial.

```
gpg --gen-key
```

Note

If you're using GnuPG version 2.3.0 or newer, you must run `gpg --full-gen-key`. When prompted for the type of key to create, choose RSA or ECC. However, if you choose ECC, make sure to choose either NIST or BrainPool for the elliptic curve. **Do not** choose Curve 25519.

2. Export the private key by running the following command. Replace `user@example.com` with the email address that you used when you generated the key.

```
gpg --output workflow-tutorial-key.pgp --armor --export-secret-key user@example.com
```

This command exports the private key to the `workflow-tutorial-key.pgp` file. You can name the output file anything that you like. You can also delete the private key file after you have added it to Amazon Secrets Manager.

Step 5: Store the PGP private key in Amazon Secrets Manager

You need to store the private key in Secrets Manager, in a very specific way, so that the workflow can find the private key when the workflow runs a decrypt step on an uploaded file.

Note

When you store secrets in Secrets Manager, your Amazon Web Services account incurs charges. For information about pricing, see [Amazon Secrets Manager Pricing](#).

To store a PGP private key in Secrets Manager

1. Sign in to the Amazon Web Services Management Console and open the Amazon Secrets Manager console at <https://console.amazonaws.cn/secretsmanager/>.
2. In the left navigation pane, choose **Secrets**.
3. On the **Secrets** page, choose **Store a new secret**.
4. On the **Choose secret type** page, for **Secret type**, choose **Other type of secret**.
5. In the **Key/value pairs** section, choose the **Key/value** tab.
 - **Key** – Enter **PGPPrivateKey**.
 - **value** – Paste the text of your private key into the value field.
6. Choose **Add row**, and in the **Key/value pairs** section, choose the **Key/value** tab.
 - **Key** – Enter **PGPPassphrase**.
 - **value** – Enter the passphrase that you used when you generated your PGP key pair in [Step 4: Create a PGP key pair](#).
7. Choose **Next**.
8. On the **Configure secret** page, enter a name and description for your secret. You can create a secret for a specific user or one that can be used by all users. If your server ID is **s-11112222333344445**, you name the secret as follows.
 - To create a default secret for all users, name the secret **aws/transfer/s-11112222333344445/@pgp-default**.
 - To create a secret only for the user that you created earlier, name the secret **aws/transfer/s-11112222333344445/decrypt-user**.

9. Choose **Next**, and then accept the defaults on the **Configure rotation** page. Then choose **Next**.
10. On the **Review** page, choose **Store** to create and store the secret.

For more information about adding your PGP private key to Secrets Manager, see [Use Amazon Secrets Manager to store your PGP key](#).

Step 6: Encrypt a file

Use the gpg program to encrypt a file for use in your workflow. Run the following command to encrypt a file:

```
gpg -e -r marymajor@example.com --openpgp testfile.txt
```

Before running this command, note the following:

- For the `-r` argument, replace *marymajor@example.com* with the email address that you used when you created the PGP key pair.
- The `--openpgp` flag is optional. This flag makes the encrypted file conform to the [OpenPGP RFC4880](#) standard.
- This command creates a file named **testfile.txt.gpg** in the same location as **testfile.txt**.

Step 7: Run the workflow and view the results

To run the workflow, you connect to the Transfer Family server with the user that you created in Step 3. Then you can look in the Amazon S3 bucket that you specified in [Step 2.5, configure destination parameters](#) to see the decrypted file.

To run the decrypt workflow

1. Open a command terminal.
2. Run the following command, replacing *your-endpoint* with your actual endpoint, and *transfer-key* with your user's SSH private key:

```
sftp -i transfer-key decrypt-user@your-endpoint
```

For example, if the private key is stored in `~/.ssh/decrypt-user`, and your endpoint is `s-11112222333344445.server.transfer.us-east-2.amazonaws.com`, the command is as follows:

```
sftp -i ~/.ssh/decrypt-user decrypt-user@s-11112222333344445.server.transfer.us-east-2.amazonaws.com
```

3. Run the `pwd` command. If successful, this command will return the following:

```
Remote working directory: /amzn-s3-demo-bucket/decrypt-user
```

Your directory reflects the name of your Amazon S3 bucket.

4. Run the following command to upload the file and trigger the workflow to run:

```
put testfile.txt.gpg
```

5. For the destination of the decrypted files, you specified the `decrypted-files/` folder when you created the workflow. Now, you can navigate to that folder and list the contents.

```
cd ../decrypted-files/  
ls
```

If successful, the `ls` command lists the `testfile.txt` file. You can download this file and verify that it is the same as the original file that you encrypted earlier.


Setting up and using SFTP connectors

The purpose of a connector is to establish a relationship between your Amazon storage and a partner's SFTP server. You can send files from Amazon S3 to an external, partner-owned destination. You can also use an SFTP connector to retrieve files from a partner's SFTP server.

This tutorial illustrates how to set up an SFTP connector, and then transfer files between Amazon S3 storage and an SFTP server.

An SFTP connector retrieves SFTP credentials from Amazon Secrets Manager to authenticate into a remote SFTP server and establish a connection. The connector sends files to or retrieves files from the remote server, and stores the files in Amazon S3. An IAM role is used to allow access to the

Amazon S3 bucket and to the credentials stored in Secrets Manager. And you can log to Amazon CloudWatch.

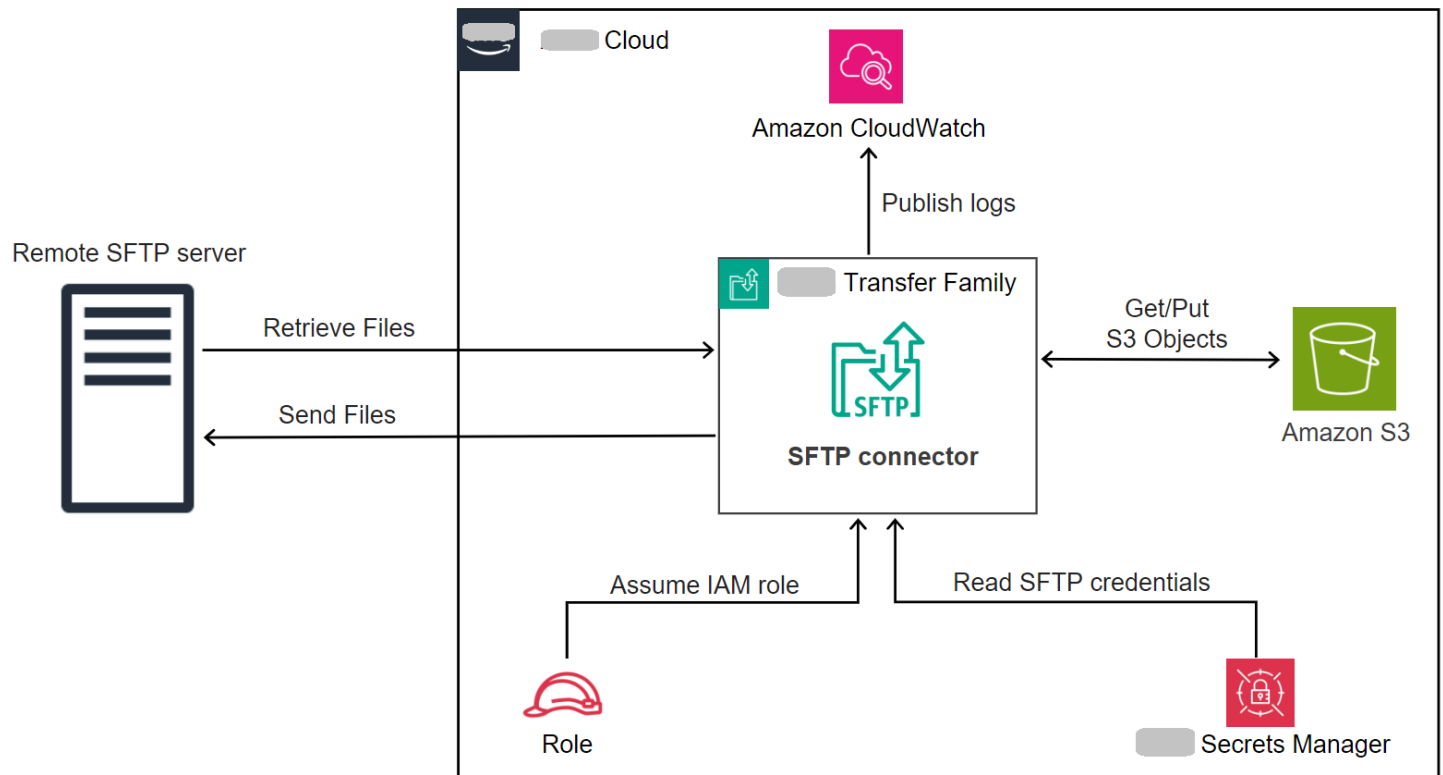

The following blog post provides a reference architecture to build an MFT workflow using SFTP connectors, including encryption of files using PGP before sending them to a remote SFTP server using SFTP connectors: [Architecting secure and compliant managed file transfers with Amazon Transfer Family SFTP connectors and PGP encryption.](#)

Topics

- [Step 1: Create the necessary supporting resources](#)
- [Step 2: Create and test an SFTP connector](#)
- [Step 3: Send and retrieve files using the SFTP connector](#)
- [Procedures to create a Transfer Family server to use as your remote SFTP server](#)

Step 1: Create the necessary supporting resources

You can use SFTP connectors to copy files between Amazon S3 and any remote SFTP server. For this tutorial, we are using an Amazon Transfer Family server as our remote SFTP server. We need to create and configure the following resources:

- Create Amazon S3 buckets to store files in your Amazon environment, and to send and retrieve files from the remote SFTP server: [Create Amazon S3 buckets](#).
- Create an Amazon Identity and Access Management role for accessing Amazon S3 storage and our secret in Secrets Manager: [Create an IAM role with the necessary permissions](#).
- Create a Transfer Family server that uses the SFTP protocol, and a service-managed user that uses the SFTP connector to transfer files to or from the SFTP server: [Create a Transfer Family SFTP server and a user](#).
- Create an Amazon Secrets Manager secret that stores the credentials used by the SFTP connector to log in to the remote SFTP server: [Create and store a secret in Amazon Secrets Manager](#).

Create Amazon S3 buckets

To create an Amazon S3 bucket

1. Sign in to the Amazon Transfer Family console at <https://console.amazonaws.cn/s3/>.
2. Choose a Region and enter a name.

For this tutorial, our bucket is in **US East (N. Virginia) us-east-1**, and the name is **sftp-server-storage-east**.

3. Accept the defaults and choose **Create bucket**.

For complete details about creating Amazon S3 buckets, see [How do I create an S3 bucket?](#) in the *Amazon Simple Storage Service User Guide*.

Create an IAM role with the necessary permissions

For the access role, create a policy with the following permissions.

The following example grants the necessary permissions to access the *amzn-s3-demo-bucket* in Amazon S3, and the specified secret stored in Secrets Manager.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowListingOfUserFolder",
      "Action": [
        "s3:ListBucket",
```

```

        "s3:GetBucketLocation"
    ],
    "Effect": "Allow",
    "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-bucket"
    ]
},
{
    "Sid": "HomeDirObjectAccess",
    "Effect": "Allow",
    "Action": [
        "s3:PutObject",
        "s3:GetObject",
        "s3:DeleteObject",
        "s3:DeleteObjectVersion",
        "s3:GetObjectVersion",
        "s3:GetObjectACL",
        "s3:PutObjectACL"
    ],
    "Resource": "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
},
{
    "Sid": "GetConnectorSecretValue",
    "Effect": "Allow",
    "Action": [
        "secretsmanager:GetSecretValue"
    ],
    "Resource": "arn:aws-cn:secretsmanager:region:account-id:secret:aws/
transfer/SecretName-6RandomCharacters"
}
]
}

```

Replace items as follows:

- For `amzn-s3-demo-bucket`, the tutorial uses **sftp-server-storage-east**.
- For *region*, the tutorial uses **us-east-1**.
- For *account-id*, use your Amazon Web Services account ID.
- For *SecretName-6RandomCharacters*, we are using **sftp-connector1** for the name (you will have your own six random characters for your secret).

You must also make sure that this role contains a trust relationship that allows the connector to access your resources when servicing your users' transfer requests. For details on establishing a trust relationship, see [To establish a trust relationship](#).

Note

To see the details for the role that we are using for the tutorial, see [Combined user and access role](#).

Create and store a secret in Amazon Secrets Manager

We need to store a secret in Secrets Manager to store user credentials for your SFTP connector. You can use a password, SSH private key, or both. For the tutorial, we are using a private key.

Note

When you store secrets in Secrets Manager, your Amazon Web Services account incurs charges. For information about pricing, see [Amazon Secrets Manager Pricing](#).

Before you begin the procedure to store the secret, retrieve and format your private key. The private key must correspond to the public key that is configured for the user on the remote SFTP server. For our tutorial, the private key must correspond to the public key that is stored for our test user on the Transfer Family SFTP server that we are using as remote server.

To do this, run the following command:

```
jq -sR . path-to-private-key-file
```

For example, if your private key file is located in `~/.ssh/sftp-testuser-privatekey`, the command is as follows.

```
jq -sR . ~/.ssh/sftp-testuser-privatekey
```

This outputs the key in the correct format (with embedded newline characters) to standard output. Copy this text somewhere, as you need to paste it in the following procedure (in step 6).

To store user credentials in Secrets Manager for an SFTP connector

1. Sign in to the Amazon Web Services Management Console and open the Amazon Secrets Manager console at <https://console.amazonaws.cn/secretsmanager/>.
2. In the left navigation pane, choose **Secrets**.
3. On the **Secrets** page, choose **Store a new secret**.
4. On the **Choose secret type** page, for **Secret type**, choose **Other type of secret**.
5. In the **Key/value pairs** section, choose the **Key/value** tab.

- **Key** – Enter **Username**.
- **value** – Enter the name of our user, **sftp-testuser**.

6. To enter the key, we recommend that you use the **Plaintext** tab.
 - a. Choose **Add row**, then enter **PrivateKey**.
 - b. Choose the **Plaintext** tab. The field now contains the following text:

```
{"Username":"sftp-testuser","PrivateKey":""}
```

- c. Paste in the text for your private key (saved earlier) between the empty double quotes ("").

Your screen should look as follows (key data is grayed out).



7. Choose **Next**.

8. On the **Configure secret** page, enter a name for your secret. For this tutorial, we name the secret **aws/transfer/sftp-connector1**.
9. Choose **Next**, and then accept the defaults on the **Configure rotation** page. Then choose **Next**.
10. On the **Review** page, choose **Store** to create and store the secret.

Step 2: Create and test an SFTP connector

In this section, we create an SFTP connector that uses all of the resources that we created earlier. For more details, see [Creating SFTP connectors](#).

To create an SFTP connector

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **SFTP Connectors**, then choose **Create SFTP connector**.
3. In the **Connector configuration** section, provide the following information:
 - For the **URL**, enter the URL of the remote SFTP server. For the tutorial, we enter the URL of the Transfer Family server that we are using as the remote SFTP server.

```
sftp://s-1111aaaa2222bbbb3.server.transfer.us-east-1.amazonaws.com
```

Replace **1111aaaa2222bbbb3** with your Transfer Family server ID.

- For the **Access role**, enter the role we created earlier, **sftp-connector-role**.
- For the **Logging role**, choose a role that includes a trust policy with `transfer.amazonaws.com` in the Principal element.

Tip: In addition to adding Transfer Family as a trusted entity, you can add the **AWSTransferLoggingAccessV3** Amazon managed policy to the role. This policy is described in detail in [Amazon managed policy: AWSTransferLoggingAccessV3](#).

Connector configuration

URL
Enter the URL of remote server to which you need to connect using the SFTP connector

URL of the remote (target) SFTP server

Access role [Info](#)
IAM Role for Amazon S3 access and Amazon Secrets Manager access

 ▼ 🔄

Logging role - optional [Info](#)
IAM role for the connector to push events to your CloudWatch logs

 ▼ 🔄

4. In the **SFTP Configuration** section, provide the following information:

- For **Connector credentials**, choose the name of your Secrets Manager resource that contains SFTP credentials. For the tutorial, choose **aws/transfer/sftp-connector1**.
- For **Trusted host keys**, paste in the public portion of the host key. You can retrieve this key by running `ssh-keyscan` for your SFTP server. For details on how to format and store the trusted host key, see the [SftpConnectorConfig](#) data type documentation.
- For **Maximum concurrent connections**, select an integer value from 1 to 5: the default value is 5.

SFTP configuration

SFTP configuration [Info](#)

Connector credentials [Info](#)
Select a secret from Secrets Manager containing the username and SSH private key, or username and password, to be used to connect to the remote server

 ▼ 🔄 Store a new secret 🔗

Trusted host keys [Info](#)
Enter the public portion of the host key(s) that is used to identify the remote server you need to connect to. Connection to the remote server is established only if it presents a SSH fingerprint that matches one of the below.

 Remove

Add trusted host key


5. After you have confirmed all of your settings, choose **Create connector** to create the SFTP connector.

After you create an SFTP connector, we recommend that you test it before you attempt to transfer any files using your new connector.


Test a connector using the console

To test an SFTP connector

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **SFTP Connectors**, and select a connector.
3. From the **Actions** menu, choose **Test connection**.

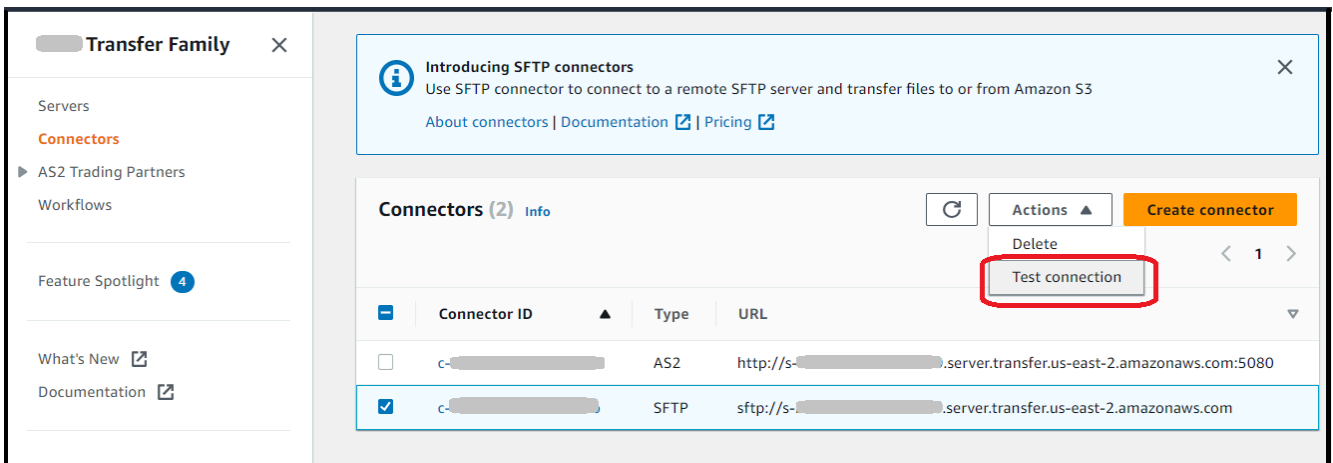

The system returns a message, indicating whether the test passes or fails. If the test fails, the system provides an error message based on the reason the test failed.

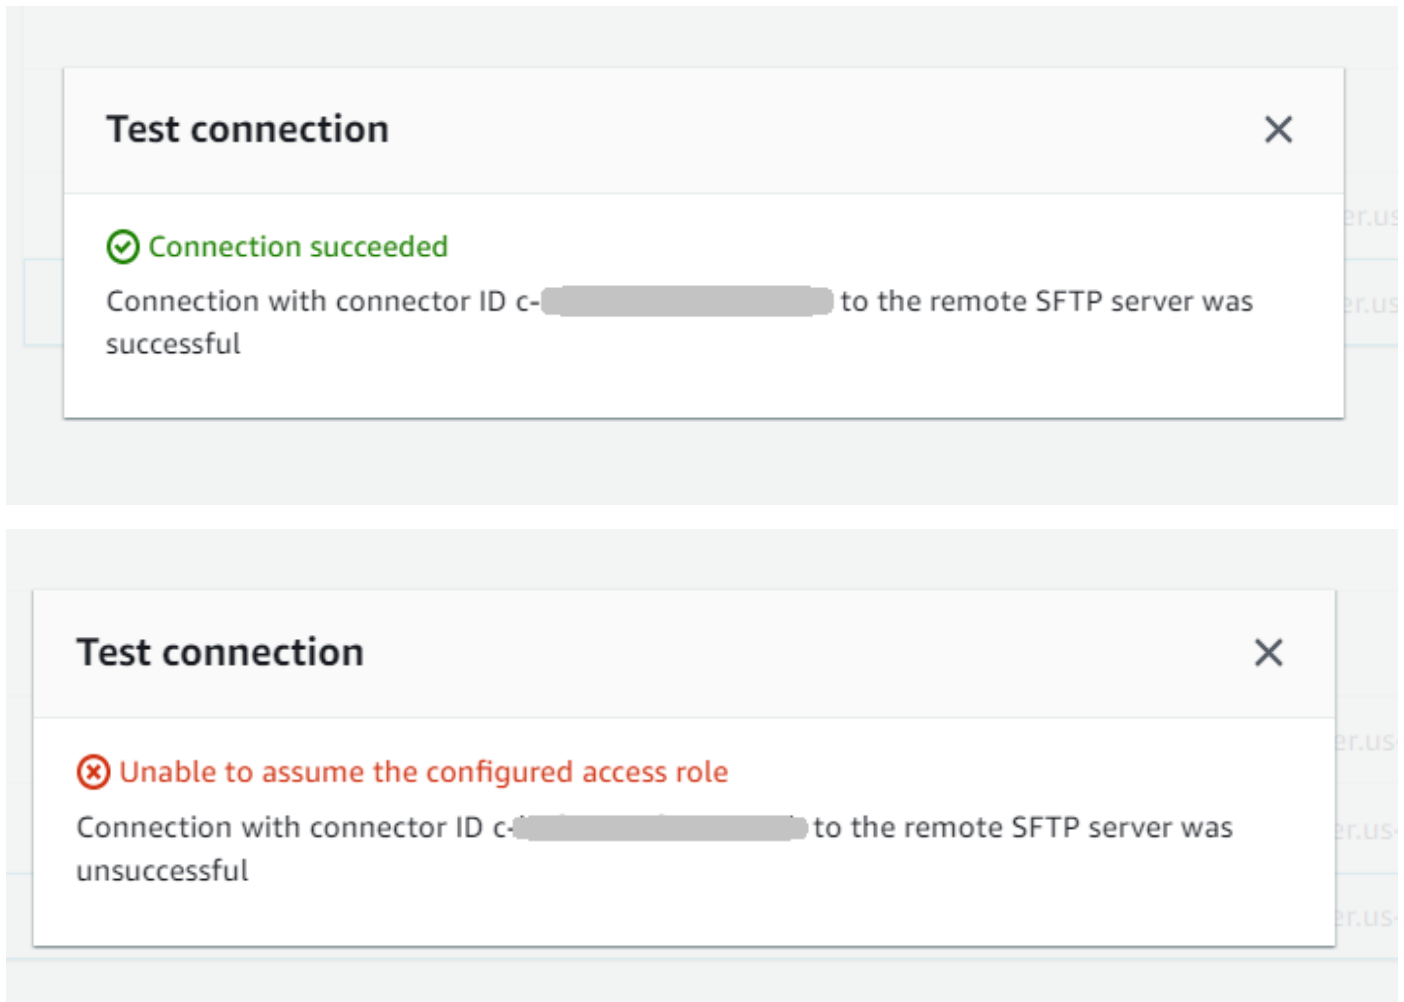

Test a connector using the CLI

To test a connector using the Amazon Command Line Interface, run the following command at a command prompt (replace *connector-id* with your actual connector ID):

```
aws transfer test-connection --connector-id c-connector-id
```

If the test is successful, the following lines are returned:

```
{
  "Status": "OK",
  "StatusMessage": "Connection succeeded"
}
```

If the test is unsuccessful, you receive a descriptive error message, for example:

```
{
```

```
"Status": "ERROR",  
"StatusMessage": "Unable to assume the configured access role"  
}
```

Step 3: Send and retrieve files using the SFTP connector

For simplicity, we assume that you already have files in your Amazon S3 bucket.

Note

The tutorial is using Amazon S3 buckets for both source and destination storage locations. If your SFTP server doesn't use Amazon S3 storage, then wherever you see `sftp-server-storage-east` in the following commands, you can replace the path with a path to file locations accessible from your SFTP server.

- We send a file named `SEND-to-SERVER.txt` from Amazon S3 storage to the SFTP server.
- We retrieve a file named `RETRIEVE-to-S3.txt` from the SFTP server to Amazon S3 storage.

Note

In the following commands, replace *connector-id* with your connector ID.

First, we send a file from our Amazon S3 bucket to the remote SFTP server. From a command prompt, run the following command:

```
aws transfer start-file-transfer --connector-id c-connector-id --send-file-paths "/  
sftp-server-storage-east/SEND-to-SERVER.txt" /  
--remote-directory-path "/sftp-server-storage-east/incoming"
```

Your `sftp-server-storage-east` bucket should now look like this.

Amazon S3 > Buckets > sftp-server-storage-east > incoming/

incoming/ Copy S3 URI

Objects | Properties


Objects (1) Info

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Refresh
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder

Upload

Find objects by prefix < 1 > Settings

<input type="checkbox"/>	Name	Type	Last modified	Size	Storage class
<input type="checkbox"/>	 SEND-to-SERVER.txt	txt	December 18, 2023, 10:36:40 (UTC-05:00)	4.1 KB	Standard

If you don't see the file as expected, check your CloudWatch logs.

To check your CloudWatch logs

1. Open the Amazon CloudWatch console at <https://console.amazonaws.cn/cloudwatch/>
2. Select **Log groups** from the left navigation menu.
3. Enter your connector ID in the search bar to find your logs.
4. Select the Log stream that is returned from the search.
5. Expand the most recent log entry.

If successful, the log entry looks like the following:

```
{
  "operation": "SEND",
  "timestamp": "2023-12-18T15:26:57.346283Z",
  "connector-id": "connector-id",
  "transfer-id": "transfer-id",
  "file-transfer-id": "transfer-id/file-transfer-id",
  "url": "sftp://server-id.server.transfer.us-east-1.amazonaws.com",
  "file-path": "/sftp-server-storage-east/SEND-to-SERVER.txt",
```

```

"status-code": "COMPLETED",
"start-time": "2023-12-18T15:26:56.915864Z",
"end-time": "2023-12-18T15:26:57.298122Z",
"account-id": "account-id",
"connector-arn": "arn:aws:transfer:us-east-1:account-id:connector/connector-id",
"remote-directory-path": "/sftp-server-storage-east/incoming"
}

```

If the file transfer failed, the log entry contains an error message that specifies the issue. Common causes for errors are problems with the IAM permissions and incorrect file paths.

Next, we retrieve a file from the SFTP server into an Amazon S3 bucket. From a command prompt, run the following command:

```

aws transfer start-file-transfer --connector-id c-connector-id --retrieve-file-paths
"/sftp-server-storage-east/RETRIEVE-to-S3.txt" --local-directory-path "/sftp-server-
storage-east/incoming"

```

If the transfer succeeds, your Amazon S3 bucket contains the transferred file, as shown here.

The screenshot shows the Amazon S3 console interface. The breadcrumb navigation is: Amazon S3 > Buckets > sftp-server-storage-east > incoming/. The page title is 'incoming/'. There are tabs for 'Objects' and 'Properties'. Below the tabs, there is a section titled 'Objects (1) Info' with a description and a 'Learn more' link. A toolbar contains buttons for 'Copy S3 URI', 'Copy URL', 'Download', 'Open', 'Delete', 'Actions', and 'Create folder'. There is also an 'Upload' button. A search box is labeled 'Find objects by prefix'. Below the search box is a table with the following columns: Name, Type, Last modified, Size, and Storage class. The table contains one row for the file 'RETRIEVE-to-S3.txt' with a type of 'txt', last modified on December 18, 2023, at 10:26:58 (UTC-05:00), a size of 4.1 KB, and a storage class of 'Standard'.

Name	Type	Last modified	Size	Storage class
RETRIEVE-to-S3.txt	txt	December 18, 2023, 10:26:58 (UTC-05:00)	4.1 KB	Standard

If successful, the log entry looks like the following:

```
{
```

```
"operation": "RETRIEVE",
"timestamp": "2023-12-18T15:36:40.017800Z",
"connector-id": "c-connector-id",
"transfer-id": "transfer-id",
"file-transfer-id": "transfer-id/file-transfer-id",
"url": "sftp://s-server-id.server.transfer.us-east-1.amazonaws.com",
"file-path": "/sftp-server-storage-east/RETRIEVE-to-S3.txt",
"status-code": "COMPLETED",
"start-time": "2023-12-18T15:36:39.727626Z",
"end-time": "2023-12-18T15:36:39.895726Z",
"account-id": "account-id",
"connector-arn": "arn:aws:transfer:us-east-1:account-id:connector/c-connector-id",
"local-directory-path": "/sftp-server-storage-east/incoming"
}
```

Procedures to create a Transfer Family server to use as your remote SFTP server

Following, we outline the steps to create a Transfer Family server that serves as your remote SFTP server for this tutorial. Note the following:

- We use a Transfer Family server to represent a remote SFTP server. Typical SFTP connector users have their own remote SFTP server. See [Create a Transfer Family SFTP server and a user](#).
- Because we're using a Transfer Family server, we're also using a service-managed SFTP user. And, for simplicity, we combined the permissions that this user needs to access the Transfer Family server with permissions they need to use our connector. Again, most SFTP connector use cases have a separate SFTP user that is not associated with a Transfer Family server. See [Create a Transfer Family SFTP server and a user](#).
- For the tutorial, because we are using Amazon S3 storage for our remote SFTP server, we need to create a second bucket, **sftp-server-storage-east**, so that we can transfer files from one bucket to another.

Create a Transfer Family SFTP server and a user

Most users won't need to create a Transfer Family SFTP server and a user, as you already have an SFTP server with users, and you can use this server to transfer files to and from. However, for this tutorial, for simplicity, we are using a Transfer Family server to function as the remote SFTP server.

Follow the procedure described in [Create an SFTP-enabled server](#) to create a server, and [Step 3: Add a service managed user](#) to add a user. These are the user details that we are using for the tutorial:

- Create your service-managed user, `sftp-testuser`.
 - Set the home directory to `/sftp-server-storage-east/sftp-testuser`
 - When you create the user, you store a public key. Later, when you create the secret in Secrets Manager, you need to provide the corresponding private key.
- Role: `sftp-connector-role`. For the tutorial, we are using the same IAM role for both our SFTP user and for accessing the SFTP connector. When you create connectors for your organization, you might have separate user and access roles.
- Server host key: You need to use the server host key when you create the connector. You can retrieve this key by running `ssh-keyscan` for your server. For example, if your server ID is `s-1111aaaa2222bbbb3`, and its endpoint is in `us-east-1`, the following command retrieves the server host key:

```
ssh-keyscan s-1111aaaa2222bbbb3.server.transfer.us-east-1.amazonaws.com
```

Copy this text somewhere, as you need to paste it in the [Step 2: Create and test an SFTP connector](#) procedure.

Combined user and access role

For the tutorial, we are using a single, combined role. We use this role both for our SFTP user, as well as for access to the connector. The following example contains the details for this role, in case you want to perform the tasks in the tutorial.

The following example grants the necessary permissions to access our two buckets in Amazon S3, and the secret named `aws/transfer/sftp-connector1` stored in Secrets Manager. For the tutorial, this role is named `sftp-connector-role`.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowListingOfUserFolder",
      "Action": [
```

```

        "s3:ListBucket",
        "s3:GetBucketLocation"
    ],
    "Effect": "Allow",
    "Resource": [
        "arn:aws:s3:::sftp-server-storage-east",
        "arn:aws:s3:::sftp-server-storage-east"
    ]
},
{
    "Sid": "HomeDirObjectAccess",
    "Effect": "Allow",
    "Action": [
        "s3:PutObject",
        "s3:GetObject",
        "s3:DeleteObject",
        "s3:DeleteObjectVersion",
        "s3:GetObjectVersion",
        "s3:GetObjectACL",
        "s3:PutObjectACL"
    ],
    "Resource": [
        "arn:aws:s3:::sftp-server-storage-east/*",
        "arn:aws:s3:::sftp-server-storage-east/*"
    ]
},
{
    "Sid": "GetConnectorSecretValue",
    "Effect": "Allow",
    "Action": [
        "secretsmanager:GetSecretValue"
    ],
    "Resource": "arn:aws:secretsmanager:us-east-1:account-id:secret:aws/transfer/sftp-connector1-6RandomCharacters"
}
]
}

```

For complete details about creating roles for Transfer Family, follow the procedure described in [Create a user role](#) to create a role.

Setting up an Amazon API Gateway method as a custom identity provider

This tutorial illustrates how to set up an Amazon API Gateway method and use it as a custom identity provider to upload files to an Amazon Transfer Family server. This tutorial uses the [Basic stack template](#), and other basic functionality as an example only.

Topics

- [Prerequisites](#)
- [Step 1: Create a CloudFormation stack](#)
- [Step 2: Check the API Gateway method configuration for your server](#)
- [Step 3: View the Transfer Family server details](#)
- [Step 4: Test that your user can connect to the server](#)
- [Step 5: Test the SFTP connection and file transfer](#)
- [Step 6: Limit access to the bucket](#)
- [Update Lambda if using Amazon EFS](#)

Prerequisites

Before you create the Transfer Family resources in Amazon CloudFormation, create your storage and your user role.

To specify storage and create a user role

1. Depending on which storage you are using, see the following documentation:
 - To create an Amazon S3 bucket, see [How do I create an S3 bucket?](#) in the *Amazon Simple Storage Service User Guide*.
 - To create an Amazon EFS file system, see [Configure an Amazon EFS file system](#).
2. To create a user role, see [Create an IAM role and policy](#)

You enter the details for your storage and your user role when you create your Amazon CloudFormation stack in the next section.

Step 1: Create a CloudFormation stack

To create an Amazon CloudFormation stack from the provided template

1. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
2. Select **Create stack**, and choose **With new resources (standard)**.
3. In the **Prerequisite - Prepare template** pane, choose **Choose an existing template**.
4. Copy this link, [Basic stack template](#), and paste it into the **Amazon S3 URL** field.
5. Click **Next**.
6. Specify parameters, including a name for your stack. Be sure to do the following:
 - Replace the default values for **UserName** and **UserPassword**.
 - For **UserHomeDirectory**, enter the details for the storage (either an Amazon S3 bucket or an Amazon EFS filesystem) that you created earlier.
 - Replace the default **UserRoleArn** with the user role that you created earlier. The Amazon Identity and Access Management (IAM) role must have the appropriate permissions. For an example IAM role and bucket policy, see [Step 6: Limit access to the bucket](#).
 - If you want to authenticate using a public key instead of a password, enter your public key in the **UserPublicKey1** field. The first time that you connect to the server using SFTP, you then provide the private key instead of a password.
7. Choose **Next**, and then choose **Next** again on the **Configure stack options** page.
8. Review the details for the stack that you are creating, and then choose **Create stack**.

Note

At the bottom of the page, under **Capabilities**, you must acknowledge that Amazon CloudFormation might create IAM resources.

Step 2: Check the API Gateway method configuration for your server

Note

To improve security, you can configure a web application firewall. Amazon WAF is a web application firewall that lets you monitor the HTTP and HTTPS requests that are forwarded to an Amazon API Gateway. For details, see [Add a web application firewall](#).

To check the API Gateway method configuration for your server and deploy it

1. Open the API Gateway console at <https://console.amazonaws.cn/apigateway/>.
2. Choose the **Transfer Custom Identity Provider basic template API** that the Amazon CloudFormation template generated.
3. In the **Resources** pane, choose **GET**, and then choose **Method Request**.
4. For **Actions**, choose **Deploy API**. For **Deployment stage**, choose **prod**, and then choose **Deploy**.

After the API Gateway method is successfully deployed, view its performance in the **Stage Editor** section.

Note

Copy the **Invoke URL** address that appears at the top of the page. You will need it for the next step.

Step 3: View the Transfer Family server details

When you use the template to create an Amazon CloudFormation stack, a Transfer Family server is automatically created.

To view your Transfer Family server details

1. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
2. Choose the stack that you created.
3. Choose the **Resources** tab.

Resources (18)			
<input type="text" value="Search resources"/>			
Logical ID	Physical ID	Type	
ApiCloudWatchLogsRole	-ApiCloudWatchLogsRole-	::IAM::Role	
ApiDeployment202008		::ApiGateway::Deployment	
ApiLoggingAccount		::ApiGateway::Account	
ApiStage	prod	::ApiGateway::Stage	
CloudWatchLoggingRole	-CloudWatchLoggingRole-	::IAM::Role	
CustomIdentityProviderApi		::ApiGateway::RestApi	
GetUserConfigLambda	-GetUserConfigLambda-	::Lambda::Function	
GetUserConfigLambdaPermission	GetUserConfigLambdaPermission-	::Lambda::Permission	
GetUserConfigRequest		::ApiGateway::Method	
GetUserConfigResource		::ApiGateway::Resource	
GetUserConfigResponseModel	UserConfigResponseModel	::ApiGateway::Model	
LambdaExecutionRole	-LambdaExecutionRole-	::IAM::Role	
ServerIdResource		::ApiGateway::Resource	
ServersResource		::ApiGateway::Resource	
TransferIdentityProviderRole	-TransferIdentityProviderRole-	::IAM::Role	
TransferServer	arn:::transfer:us-east-2:::server/s-	::Transfer::Server	
UserNameResource		::ApiGateway::Resource	
UsersResource		::ApiGateway::Resource	

The server ARN is shown in the **Physical ID** column for the **TransferServer** row. The server ID is contained in the ARN, for example **s-11112222333344445**.

- Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>, and on the **Servers** page, choose the new server.

The server ID matches the ID displayed for the **TransferServer** resource in Amazon CloudFormation.

Step 4: Test that your user can connect to the server

To test that your user can connect to the server, using the Transfer Family console

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. On the **Servers** page, choose your new server, choose **Actions**, and then choose **Test**.
3. Enter the text for your sign-in credentials into the **Username** field, and into the **Password** field. These are the values that you set when you deployed the Amazon CloudFormation stack.
4. For **Server Protocol**, select **SFTP**, and for **Source IP**, enter **127.0.0.1**.
5. Choose **Test**.

If user authentication succeeds, the test returns a `StatusCode: 200` HTML response and a JSON object containing the details of the user's roles and permissions. For example:

```
{
  "Response": "{\"Role\": \"arn:aws-cn:iam::123456789012:role/my-user-role\",
  \"HomeDirectory\": \"/${transfer:HomeBucket}/\"\",
  \"StatusCode\": 200,
  \"Message\": \"\",
  \"Url\": \"https://1a2b3c4d5e.execute-api.us-east-2.amazonaws.com/prod/servers/s-1234abcd5678efgh0/users/myuser/config\"
}
```

If the test fails, add one of the API Gateway Amazon managed policies to the role that you are using for your API.

Step 5: Test the SFTP connection and file transfer

To test the SFTP connection

1. On a Linux or macOS device, open a command terminal.
2. Enter one of the following commands, depending on whether you are using a password or a key pair for authentication.
 - If you are using a password, enter this command:

```
sftp -o PubkeyAuthentication=no myuser@server-
ID.server.transfer.region-code.amazonaws.com
```

When prompted, enter your password.

- If you are using a key pair, enter this command:

```
sftp -i private-key-file myuser@server-ID.server.transfer.region-code.amazonaws.com
```

Note

For these sftp commands, insert the code for the Amazon Web Services Region where your Transfer Family server is located. For example, if your server is in US East (Ohio), enter **us-east-2**.

3. At the sftp> prompt, make sure that you can upload (put), download (get), and view directories and files (pwd and ls).

Step 6: Limit access to the bucket

You can limit who can access a specific Amazon S3 bucket. The following example shows the settings to use in your CloudFormation stack and in the policy that you select for your user.

In this example, we set the following parameters for the Amazon CloudFormation stack:

- **CreateServer:** true
- **UserHomeDirectory:** /amzn-s3-demo-bucket1
- **UserName:** myuser
- **UserPassword:** MySuperSecretPassword

Important

This is an example password. When you configure your API Gateway method, make sure that you enter a strong password.

- **UserPublicKey1:** *your-public-key*
- **UserRoleArn:** arn:aws-cn:iam::*role-id*:role/myuser-api-gateway-role

The **UserPublicKey1** is a public key that you have generated as part of a public/private key pair.

The *role-id* is unique to the user role that you create. The policy attached to the `myuser-api-gateway-role` is the following:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": "s3:ListBucket",
      "Resource": "arn:aws-cn:s3:::amzn-s3-demo-bucket1"
    },
    {
      "Sid": "VisualEditor1",
      "Effect": "Allow",
      "Action": [
        "s3:PutObject",
        "s3:GetObjectAcl",
        "s3:GetObject",
        "s3:DeleteObjectVersion",
        "s3:DeleteObject",
        "s3:PutObjectAcl",
        "s3:GetObjectVersion"
      ],
      "Resource": "arn:aws-cn:s3:::amzn-s3-demo-bucket1/*"
    }
  ]
}
```

To connect to the server using SFTP, enter one of the following commands at the prompt.

- If you are using a password to authenticate, run the following command:

```
sftp -o PubkeyAuthentication=no myuser@transfer-server-  
ID.server.transfer.region-id.amazonaws.com
```

When prompted, enter your password.

- If you are using a key pair to authenticate, run the following command:

```
sftp -i private-key-file myuser@transfer-server-  
ID.server.transfer.region-id.amazonaws.com
```

Note

For these `sftp` commands, use the ID for the Amazon Web Services Region where your Transfer Family server is located. For example, if your server is in US East (Ohio), use `us-east-2`.

At the `sftp` prompt, you are directed to your home directory, which you can view by running the `pwd` command. For example:

```
sftp> pwd
Remote working directory: /amzn-s3-demo-bucket1
```

The user cannot view any directories above the home directory. For example:

```
sftp> pwd
Remote working directory: /amzn-s3-demo-bucket1
sftp> cd ..
sftp> ls
Couldn't read directory: Permission denied
```

Update Lambda if using Amazon EFS

If you selected Amazon EFS as the storage option for your Transfer Family server, you need to edit the lambda function for your stack.

To add a Posix profile to your Lambda function

1. Open the Lambda console at <https://console.amazonaws.cn/lambda/>.
2. Select the Lambda function that you created earlier. The Lambda function has the format of ***stack-name-GetUserConfigLambda-lambda-identifier***, where *stack-name* is the CloudFormation stack name and *lambda-identifier* is the identifier for the function.
3. In the **Code** tab, select `index.js` to display the code for the function.
4. In the response, add the following line between `Policy` and `HomeDirectory`:

```
PosixProfile: {"Uid": uid-value, "Gid": gid-value},
```

Where the *uid-value* and *gid-value* are integers, 0 or greater, that represent the User ID and Group ID respectively.

For example, after you add the Posix profile, the response field might look like the following:

```
response = {
  Role: 'arn:aws-cn:iam::123456789012:role/api-gateway-transfer-efs-role', //
  The user will be authenticated if and only if the Role field is not blank
  Policy: '', // Optional JSON blob to further restrict this user's permissions
  PosixProfile: {"Gid": 65534, "Uid": 65534},
  HomeDirectory: '/fs-fab2c234' // Not required, defaults to '/'
};
```

Setting up an AS2 configuration

This tutorial walks through how to set up an Applicability Statement 2 (AS2) configuration with Amazon Transfer Family. After you complete the steps described here, you will have an AS2-enabled server that's ready for accepting AS2 messages from a sample trading partner. You will also have a connector that can be used to send AS2 messages to the sample trading partner.

Note

Some portions of the example setup use the Amazon Command Line Interface (Amazon CLI). If you haven't already installed the Amazon CLI, see [Installing or updating the latest version of the Amazon CLI](#) in the *Amazon Command Line Interface User Guide*.

1. Create certificates for yourself and your trading partner. If you have existing certificates that you can use, you can skip this section.

This process is described in [Step 1: Create certificates for AS2](#).

2. Import the certificates that you created in step 1.

This process is described in [Step 3: Import certificates as Transfer Family certificate resources](#).

3. To set up your trading partners, create a local profile and a partner profile.

This process is described in [Step 3: Create profiles for you and your trading partner](#).

4. Create an Amazon Transfer Family server that uses the AS2 protocol. Optionally, you can add an Elastic IP address to the server to make it internet-facing.

This process is described in [Step 4: Create a Transfer Family server that uses the AS2 protocol](#).

Note

You must create a Transfer Family server for inbound transfers only. If you're performing only outbound transfers, you don't need a Transfer Family server.

5. Create an agreement between you and your trading partner.

This process is described in [Step 5: Create an agreement between you and your partner](#).

Note

You must create an agreement for inbound transfers only. If you're performing only outbound transfers, you don't need an agreement.

6. Create a connector between you and your trading partner.

This process is described in [Step 6: Create a connector between you and your partner](#).

Note

You must create a connector for outbound transfers only. If you're performing only inbound transfers, you don't need a connector.

7. Test an AS2 file exchange.

This process is described in [Step 7: Test exchanging files over AS2 by using Transfer Family](#).

After you complete these steps, you can do the following:

- Send files to a remote AS2-enabled partner server with the Transfer Family `start-file-transfer` Amazon Command Line Interface (Amazon CLI) command.
- Receive files from a remote AS2-enabled partner server on port 5080 through your virtual private cloud (VPC) endpoint.

Step 1: Create certificates for AS2

Both parties in an AS2 exchange need X.509 certificates. You can create these certificates in any way that you like. This topic describes how to use [OpenSSL](#) from the command line to create a root certificate, and then sign subordinate certificates. Both parties must generate their own certificates.

Note

The key length for AS2 certificates must be at least 2048 bits, and at most 4096.

To transfer files with a partner, take note of the following:

- You can attach certificates to profiles. The certificates contain public or private keys.
- Your trading partner sends you their public keys, and you send them yours.
- Your trading partner encrypts messages with your public key and signs them with their private key. Conversely, you encrypt messages with your partner's public key and sign them with your private key.

Note

If you prefer to manage keys with a GUI, [Portecle](#) is one option that you can use.

To generate example certificates

Important

Do not send your partner your private keys. In this example, you generate a set of self-signed public and private keys for one party. If you are going to act as both trading partners for testing purposes, you can repeat these instructions to generate two sets of keys: one for each trading partner. In this case, you do not need to generate two root certificate authorities (CAs).

1. Run the following command to generate an RSA private key with a 2048-bit-long modulus.

```
/usr/bin/openssl genrsa -out root-ca-key.pem 2048
```

2. Run the following command to create a self-signed certificate with your `root-ca-key.pem` file.

```
/usr/bin/openssl req \
-x509 -new -nodes -sha256 \
-days 1825 \
-subj "/C=US/ST=MA/L=Boston/O=TransferFamilyCustomer/OU=IT-dept/CN=ROOTCA" \
-key root-ca-key.pem \
-out root-ca.pem
```

The `-subj` argument consists of the following values.

	Name	Description
C	Country code	A two-letter code for the country in which your organization is located.
ST	State, region, or province	The state, region, or province in which your organization is located. (In this case, <i>region</i> does not refer to your Amazon Web Services Region.)
L	Locality name	The city in which your organization is located.
O	Organization name	The full legal name of your organization, including suffixes, such as LLC, Corp, and so on.

	Name	Description
OU	Organizational unit name	The division in your organization that deals with this certificate.
CN	Common name or fully qualified domain name (FQDN)	In this case, we're creating a root certificate, so the value is ROOTCA. In these examples, we are using CN to describe the purpose of the certificate.

3. Create a signing key and an encryption key for your local profile.

```
/usr/bin/openssl genrsa -out signing-key.pem 2048
/usr/bin/openssl genrsa -out encryption-key.pem 2048
```

Note

Some AS2-enabled servers, such as OpenAS2, require that you use the same certificate for both signing and encryption. In this case, you can import the same private key and certificate for both purposes. To do so, run this command instead of the two previous commands:

```
/usr/bin/openssl genrsa -out signing-and-encryption-key.pem 2048
```

4. Run the following commands to create Certificate Signing Requests (CSRs) for the root key to sign.

```
/usr/bin/openssl req -new -key signing-key.pem -subj \
"/C=US/ST=MA/L=Boston/O=TransferFamilyCustomer/OU=IT-dept/CN=Signer" -out signing-
key-csr.pem
```

```
/usr/bin/openssl req -new -key encryption-key.pem -subj \
"/C=US/ST=MA/L=Boston/O=TransferFamilyCustomer/OU=IT-dept/CN=Encrypter" -out
encryption-key-csr.pem
```

5. Next, you must create a `signing-cert.conf` file and an `encryption-cert.conf` file.

- Use a text editor to create the `signing-cert.conf` file with the following contents:

```
authorityKeyIdentifier=keyid,issuer
keyUsage = digitalSignature, nonRepudiation
```

- Use a text editor to create the `encryption-cert.conf` file with the following contents:

```
authorityKeyIdentifier=keyid,issuer
keyUsage = dataEncipherment
```

6. Finally, you create the signed certificates by running the following commands.

```
/usr/bin/openssl x509 -req -sha256 -CAcreateserial -days 1825 -in signing-key-
csr.pem -out signing-cert.pem -CA \
root-ca.pem -CAkey root-ca-key.pem -extfile signing-cert.conf
```

```
/usr/bin/openssl x509 -req -sha256 -CAcreateserial -days 1825 -in encryption-key-
csr.pem -out encryption-cert.pem \
-CA root-ca.pem -CAkey root-ca-key.pem -extfile encryption-cert.conf
```

Step 3: Import certificates as Transfer Family certificate resources

This procedure explains how to import certificates by using the Amazon CLI. If you want to use the Transfer Family console instead, see [the section called "Import AS2 certificates"](#).

To import the signing and encryption certificates that you created in step 1, run the following `import-certificate` commands. If you're using the same certificate for encryption and signing, import the same certificate twice (once with the `SIGNING` usage and again with the `ENCRYPTION` usage).

Note

If you have a file that contains both a certificate and its chain, you can provide that file to the `import-certificate` command using only the `certificate` parameter. For example:

```
aws transfer import-certificate --usage ENCRYPTION --certificate
file://combined-cert-and-chain-file.pem
```

If you use the `certificate` parameter to upload both the certificate and its chain, don't use the `certificate-chain` parameter.

If you combine the certificate and its chain, your key is formatted using conventional PEM standards, which includes a newline “\n” every 64 characters. The certificate that is stored is functionally equivalent to the one you uploaded, with the sole difference that the `DescribeCertificate` response via the Amazon CLI will contain these newline characters.

```
aws transfer import-certificate --usage SIGNING --certificate file://signing-cert.pem \
--private-key file://signing-key.pem --certificate-chain file://root-ca.pem
```

This command returns your signing `CertificateId`. In the next section, this certificate ID is referred to as *my-signing-cert-id*.

```
aws transfer import-certificate --usage ENCRYPTION --certificate file://encryption-
cert.pem \
--private-key file://encryption-key.pem --certificate-chain file://root-
ca.pem
```

This command returns your encryption `CertificateId`. In the next section, this certificate ID is referred to as *my-encrypt-cert-id*.

Next, import your partner's encryption and signing certificates by running the following commands.

```
aws transfer import-certificate --usage ENCRYPTION --certificate file://partner-
encryption-cert.pem \
--certificate-chain file://partner-root-ca.pem
```

This command returns your partner's encryption `CertificateId`. In the next section, this certificate ID is referred to as *partner-encrypt-cert-id*.

```
aws transfer import-certificate --usage SIGNING --certificate file://partner-signing-
cert.pem \
```

```
--certificate-chain file://partner-root-ca.pem
```

This command returns your partner's signing CertificateId. In the next section, this certificate ID is referred to as *partner-signing-cert-id*.

Step 3: Create profiles for you and your trading partner

This procedure explains how to create AS2 profiles by using Amazon CLI. If you want to use the Transfer Family console instead, see [the section called "Create AS2 profiles"](#).

Create your local AS2 profile by running the following command. This command references the certificates that contain your public and private keys.

```
aws transfer create-profile --as2-id MYCORP --profile-type LOCAL --certificate-ids \  
my-signing-cert-id my-encrypt-cert-id
```

This command returns your profile ID. In the next section, this ID is referred to as *my-profile-id*.

Now create the partner profile by running the following command. This command uses only your partner's public key certificates. To use this command, replace the *user input placeholders* with your own information; for example, your partner's AS2 name and certificate IDs.

```
aws transfer create-profile --as2-id PARTNER-COMPANY --profile-type PARTNER --  
certificate-ids \  
partner-signing-cert-id partner-encrypt-cert-id
```

This command returns your partner's profile ID. In the next section, this ID is referred to as *partner-profile-id*.

Note

In the previous commands, replace *MYCORP* with the name of your organization, and *PARTNER-COMPANY* with the name of your trading partner's organization.

Step 4: Create a Transfer Family server that uses the AS2 protocol

This procedure explains how to create an AS2-enabled server by using the Transfer Family Amazon CLI.

Note

Many of the example steps use commands that load parameters from a file. For more details about using files to load parameters, see [How to load parameters from a file](#).

If you want to use the console instead, see [Create an AS2 server using the Transfer Family console](#).

Similar to how you create an SFTP or FTPS Amazon Transfer Family server, you create an AS2-enabled server by using the `--protocols AS2` parameter of the `create-server` Amazon CLI command. Currently, Transfer Family supports only VPC endpoint types and Amazon S3 storage with the AS2 protocol.

When you create your AS2-enabled server for Transfer Family by using the `create-server` command, a VPC endpoint is automatically created for you. This endpoint exposes TCP port 5080 so that it can accept AS2 messages.

If you want to expose your VPC endpoint publicly to the internet, you can associate Elastic IP addresses with your VPC endpoint.

To use these instructions, you need the following:

- The ID of your VPC (for example, **vpc-abcdef01**).
- The IDs of your VPC subnets (for example, **subnet-abcdef01**, **subnet-subnet-abcdef01**, **subnet-021345ab**).
- One or more IDs of the security groups that allow incoming traffic on TCP port 5080 from your trading partners (for example, **sg-1234567890abcdef0** and **sg-abcdef01234567890**).
- (Optional) The Elastic IP addresses that you want to associate with your VPC endpoint.
- If your trading partner is not connected to your VPC through a VPN, you need an internet gateway. For more information, see [Connect to the internet using an internet gateway](#) in the *Amazon VPC User Guide*.

To create an AS2-enabled server

1. Run the following command. Replace each *user input placeholder* with your own information.

```
aws transfer create-server --endpoint-type VPC \
```



```
--endpoint-details VpcId=vpc-abcdef01,SubnetIds=subnet-abcdef01,subnet-
abcdef01,subnet-
021345ab,SecurityGroupIds=sg-abcdef01234567890,sg-1234567890abcdef0 --protocols AS2
\
--protocol-details As2Transports=HTTP
```

2. (Optional) You can make the VPC endpoint public. You can attach Elastic IP addresses to a Transfer Family server only through an `update-server` operation. The following commands stop the server, update it with Elastic IP addresses, and then start it again.

```
aws transfer stop-server --server-id your-server-id
```

```
aws transfer update-server --server-id your-server-id --endpoint-details \
AddressAllocationIds=eipalloc-abcdef01234567890,eipalloc-
1234567890abcdef0,eipalloc-abcd012345ccccccc
```

```
aws transfer start-server --server-id your-server-id
```

This `start-server` command automatically creates a DNS record for you that contains the public IP address for your server. To give your trading partner access to the server, you provide them with the following information. In this case, *your-region* refers to your Amazon Web Services Region.

s-your-server-id.server.transfer.*your-region*.amazonaws.com

The full URL that you provide to your trading partner is as follows:

`http://s-your-server-id.server.transfer.your-region.amazonaws.com:5080`

3. To test whether your AS2-enabled server is accessible, use the following commands. Make sure that your server can be accessed either through your VPC endpoint's private DNS address, or through your public endpoint (if you associated an Elastic IP address with your endpoint).

If your server is configured correctly, the connection will succeed. However, you will receive an HTTP status code 400 (Bad Request) response because you aren't sending a valid AS2 message.

- For a public endpoint (if you associated an Elastic IP address in the previous step), run the following command, substituting your server ID and Region.

```
curl -vv -X POST http://s-your-server-id.transfer.your-region.amazonaws.com:5080
```

- If you are connecting within your VPC, look up your VPC endpoint's private DNS name by running the following commands.

```
aws transfer describe-server --server-id s-your-server-id
```

This `describe-server` command returns your VPC endpoint ID in the `VpcEndpointId` parameter. Use this value to run the following command.

```
aws ec2 describe-vpc-endpoints --vpc-endpoint-ids vpce-your-vpc-endpoint-id
```

This `describe-vpc-endpoints` command returns a `DNSEntries` array, with several `DnsName` parameters. Use the Regional DNS name (the one that does not include the Availability Zone) in the following command.

```
curl -vv -X POST http://vpce-your-vpce.vpce-svc-your-vpce-svc.your-region.vpce.amazonaws.com:5080
```

For example, the following command shows sample values for the placeholders in the previous command.

```
curl -vv -X POST http://vpce-0123456789abcdefg-fghij123.vpce-svc-11111aaaa2222bbbb.us-east-1.vpce.amazonaws.com:5080
```

4. (Optional) Configure a logging role. Transfer Family logs the status of messages sent and received in a structured JSON format to Amazon CloudWatch logs. To provide Transfer Family with access to the CloudWatch logs in your account, you must configure a logging role on your server.

Create an Amazon Identity and Access Management (IAM) role that trusts `transfer.amazonaws.com`, and attach the `AWSTransferLoggingAccess` managed policy. For details, see [Create an IAM role and policy](#). Note the Amazon Resource Name (ARN) of the IAM role that you just created, and associate it with the server by running the following `update-server` command:

```
aws transfer update-server --server-id your-server-id --logging-role arn:aws-cn:iam::your-account-id:role/logging-role-name
```

Note

Even though the logging role is optional, we highly recommend setting it up so that you can see the status of your messages and troubleshoot configuration issues.

Step 5: Create an agreement between you and your partner

This procedure explains how to create AS2 agreements by using the Amazon CLI. If you want to use the Transfer Family console instead, see [the section called “Create an AS2 agreement”](#).

Agreements bring together the two profiles (local and partner), their certificates, and a server configuration that allows inbound AS2 transfers between two parties. You can list your items by running the following commands.

```
aws transfer list-profiles --profile-type LOCAL
aws transfer list-profiles --profile-type PARTNER
aws transfer list-servers
```

This step requires an Amazon S3 bucket and IAM role with read/write access to and from the bucket. The instructions for creating this role are the same as for the Transfer Family SFTP, FTP, and FTPS protocols and are available in [Create an IAM role and policy](#).

To create an agreement, you need the following items:

- The Amazon S3 bucket name (and object prefix, if specified) to store your AS2 files. We recommend that you specify separate directories for different file types.
- The ARN of the IAM role with access to the bucket
- Your Transfer Family server ID
- Your profile ID and your partner's profile ID

Save the following code into a file, for example, `agreementDetails.json`. Replace each *user input placeholder* with your own information.

```
{
  "Description": "ExampleAgreementName",
  "ServerId": "your-server-id",
  "LocalProfileId": "your-profile-id",
  "PartnerProfileId": "your-partner-profile-id",
  "AccessRole": "arn:aws-cn:iam::111111111111:role/TransferAS2AccessRole",
  "Status": "ACTIVE",
  "PreserveFilename": "ENABLED",
  "EnforceMessageSigning": "ENABLED",
  "CustomDirectories": {
    "FailedFilesDirectory": "/amzn-s3-demo-destination-bucket/AS2-failed",
    "MdnFilesDirectory": "/amzn-s3-demo-destination-bucket/AS2-mdn",
    "PayloadFilesDirectory": "/amzn-s3-demo-destination-bucket/AS2-payload",
    "StatusFilesDirectory": "/amzn-s3-demo-destination-bucket/AS2-status",
    "TemporaryFilesDirectory": "/amzn-s3-demo-destination-bucket/AS2-temp"
  }
}
```

Note

To use a single base directory instead of separate directories, remove the `CustomDirectories` line and its individual directory lines from the previous code and use the following parameter instead:

```
"BaseDirectory": "/amzn-s3-demo-destination-bucket/AS2-inbox"
```

Do not use both a base directory and separate directory parameters, or the command will fail.

Then, run the following command.

```
aws transfer create-agreement --cli-input-json file://agreementDetails.json
```

If successful, this command returns the ID for the agreement. You can then view the details of the agreement with the following command.

```
aws transfer describe-agreement --agreement-id agreement-id --server-id your-server-id
```

Step 6: Create a connector between you and your partner

This procedure explains how to create AS2 connectors by using the Amazon CLI. If you want to use the Transfer Family console instead, see [the section called "Configure AS2 connectors"](#).

You can use the `StartFileTransfer` API operation to send files that are stored in Amazon S3 to your trading partner's AS2 endpoint by using a connector. You can find the profiles that you created earlier by running the following command.

```
aws transfer list-profiles
```

When you create the connector, you must provide your partner's AS2 server URL. Copy the following text to a file named `testAS2Config.json`.

```
{
  "Compression": "ZLIB",
  "EncryptionAlgorithm": "AES256_CBC",
  "LocalProfileId": "your-profile-id",
  "MdnResponse": "SYNC",
  "MdnSigningAlgorithm": "DEFAULT",
  "MessageSubject": "Your Message Subject",
  "PartnerProfileId": "partner-profile-id",
  "PreserveContentType": "FALSE",
  "SigningAlgorithm": "SHA256"
}
```

Note

For `EncryptionAlgorithm`, do not specify the `DES_EDE3_CBC` algorithm unless you must support a legacy client that requires it, as it is a weak encryption algorithm.

Then run the following command to create the connector.

```
aws transfer create-connector --url "http://partner-as2-server-url" \  
--access-role your-IAM-role-for-bucket-access \  
--logging-role arn:aws-cn:iam::your-account-id:role/service-role/  
AWSTransferLoggingAccess \  
--as2-config file:///path/to/testAS2Config.json
```

Step 7: Test exchanging files over AS2 by using Transfer Family

Receive a file from your trading partner

If you associated a public Elastic IP address with your VPC endpoint, Transfer Family automatically created a DNS name that contains your public IP address. The subdomain is your Amazon Transfer Family server ID (of the format `s-1234567890abcdef0`). Provide your server URL to your trading partner in the following format.

```
http://s-1234567890abcdef0.server.transfer.us-east-1.amazonaws.com:5080
```

If you didn't associate a public Elastic IP address with your VPC endpoint, look up the hostname of the VPC endpoint that can accept AS2 messages over HTTP POST from your trading partners on port 5080. To retrieve the VPC endpoint details, use the following command.

```
aws transfer describe-server --server-id s-1234567890abcdef0
```

For example, assume the preceding command returns a VPC endpoint ID of `vpce-1234abcd5678efghi`. Then, you would use the following command to retrieve the DNS names.

```
aws ec2 describe-vpc-endpoints --vpc-endpoint-ids vpce-1234abcd5678efghi
```

This command returns all the details for the VPC endpoint that you need to run the following command.

The DNS name is listed in the `DnsEntries` array. Your trading partner must be within your VPC to access your VPC endpoint (for example through Amazon PrivateLink or a VPN). Provide your VPC endpoint URL to your partner in the following format.

```
http://vpce-your-vpce-id.vpce-svc-your-vpce-svc-id.your-region.vpce.amazonaws.com:5080
```

For example, the following URL shows sample values for the placeholders in the previous commands.

```
http://vpce-0123456789abcdefg-fghij123.vpce-svc-11111aaaa2222bbbb.us-east-1.vpce.amazonaws.com:5080
```

In this example, successful transfers are stored at the location that's specified in the `base-directory` parameter that you specified in [Step 5: Create an agreement between you and your partner](#). If we successfully receive files named `myfile1.txt` and `myfile2.txt`, the files are stored as `/path-defined-in-the-agreement/processed/original_filename.messageId.original_extension`. Here, the files are stored as `/amzn-s3-demo-destination-bucket/AS2-inbox/processed/myfile1.messageId.txt` and `/amzn-s3-demo-destination-bucket/AS2-inbox/processed/myfile2.messageId.txt`.

If you configured a logging role when you created your Transfer Family server, you can also check your CloudWatch logs for the status of AS2 messages.

Send a file to your trading partner

You can use Transfer Family to send AS2 messages by referencing the connector ID and the paths to the files, as illustrated in the following `start-file-transfer` Amazon Command Line Interface (Amazon CLI) command:

```
aws transfer start-file-transfer --connector-id c-1234567890abcdef0 \  
--send-file-paths "/amzn-s3-demo-source-bucket/myfile1.txt" "/amzn-s3-demo-source-  
bucket/myfile2.txt"
```

To get the details for your connectors, run the following command:

```
aws transfer list-connectors
```

The `list-connectors` command returns the connector IDs, URLs, and Amazon Resource Names (ARNs) for your connectors.

To return the properties of a particular connector, run the following command with the ID that you want to use:

```
aws transfer describe-connector --connector-id your-connector-id
```

The `describe-connector` command returns all of the properties for the connector, including its URL, roles, profiles, Message Disposition Notices (MDNs), tags, and monitoring metrics.

You can confirm that the partner successfully received the files by viewing the JSON and MDN files. These files are named according to the conventions described in [File names and locations](#). If you

configured a logging role when you created the connector, you can also check your CloudWatch logs for the status of AS2 messages.

Setting up a Transfer Family web app

This tutorial walks through how to set up a Transfer Family web app. Transfer Family web apps enable a simple interface for transferring data to and from Amazon S3 over a web browser. For detailed documentation for this feature, see [Transfer Family web apps](#).

Web app tutorial: prerequisites

- Create either an account instance or organization instance of Amazon IAM Identity Center. For details, see [Configure your identity provider for Transfer Family web apps](#).

If you are not using IAM Identity Center as your identity provider, [Integrate Okta as your identity provider for web apps](#) illustrates how to use an alternative (in this case Okta) identity provider.

- You need an Amazon S3 bucket to use for interacting with your Transfer Family web app. For details, see [Configure an Amazon S3 bucket](#)

Note

This tutorial assumes that you are using the IAM Identity Center directory for your identity provider. If that is not the case, see [Configure your identity provider for Transfer Family web apps](#) before proceeding with this tutorial.

After you complete the tutorial, your user can log in and interact with the web app that you create.

Step 1: Create the necessary supporting resources

You need to add a user to your IAM Identity Center directory. You also need two roles: one to use as an identity bearer role for your web app, and a second to use for configuring an Amazon S3 access grant. For the tutorial, we allow Amazon services to create these roles for us.

To add a user

1. Sign in to the Amazon Web Services Management Console and open the Amazon IAM Identity Center console at <https://console.amazonaws.cn/singlesignon/>.

2. From the left navigation pane, choose **Users**.
3. Choose **Add user** and specify the user details.

Specify a username, email address, and other required information. You can choose to either send an email to the user with instructions for setting up their password, or you can generate a one-time password to share with them.

4. Choose **Next** and optionally assign the new user to one or more groups.
5. Choose **Next** and review your choices.

If everything looks good, choose **Add user** to create the new user with the details that you specified.

For the tutorial, the example user is **Bob Stiles**, username **bobstiles** and email address **bobstiles@example.com**.

Step 2: Create a Transfer Family web app

To create a Transfer Family web app

1. Sign in to the Amazon Web Services Management Console and open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Web apps**.
3. Choose **Create web app**.

For authentication access, note that the service automatically finds the Amazon IAM Identity Center instance that you set up as a prerequisite.

4. In the **Permission type** pane, select **Create and use a new service role**. The service creates the identity bearer role for you. An identity bearer role includes an authenticated user's identity in its sessions.
5. In the **Web app units** pane, accept the default value of 1, or adjust to a higher value if needed.
6. Add a tag to help you organize your web apps. For the tutorial, enter **Name** for the key and **Tutorial web app** for the value.

Tip

You can edit the web app name directly from the **Web apps** list page after you create it.

7. Choose **Next** to open the **Design web app** page. On this screen, provide the following information.

You can optionally provide a title for your web app. You can also upload image files for your logo and favicon.

- For the page title, customize the title for the browser tab that your users see when they connect to the web app. If you don't enter anything for the page title, it defaults to **Transfer Web App**.
 - For the logo, upload an image file. The maximum file size for your logo image is 50 KB.
 - For the favicon, upload an image file. The maximum file size for your favicon is 20 KB.
8. Choose **Next**, then choose **Create web app**.

To provide a branded experience, you can provide a custom URL for your users to access your Transfer Family web app. For details, see [Update your access endpoint with a custom URL](#).

Step 3: Configure Cross-origin resource sharing (CORS) for your bucket

You must set up cross-origin resource sharing (CORS) for all buckets that are used by your web app. A *CORS configuration* is a document that defines rules that identify the origins that you will allow to access your bucket. For more information about CORS, see [Configuring cross-origin resource sharing \(CORS\)](#).

To set up Cross-origin resource sharing (CORS) for your Amazon S3 bucket

1. Sign in to the Amazon Web Services Management Console and open the Amazon S3 console at <https://console.amazonaws.cn/s3/>.
2. Choose **Buckets** from the left navigation panel and search for your bucket in the search dialog, then choose the **Permissions** tab.
3. In **Cross-origin resource sharing (CORS)**, choose **Edit** and paste in the following code. Replace *AccessEndpoint* with the actual access endpoint for your web app. Make sure not to enter trailing slashes, because doing so causes errors when users attempt to log on to your web app.

- Incorrect example: `https://webapp-c7bf3423.transfer-webapp.us-east-2.on.aws/`
- Correct example: `https://webapp-c7bf3423.transfer-webapp.us-east-2.on.aws`

If you are reusing a bucket for multiple web apps, append their web app access endpoints to the `AllowedOrigins` list.

```
[
  {
    "AllowedHeaders": [
      "*"
    ],
    "AllowedMethods": [
      "GET",
      "PUT",
      "POST",
      "DELETE",
      "HEAD"
    ],
    "AllowedOrigins": [
      "https://AccessEndpoint"
    ],
    "ExposeHeaders": [
      "last-modified",
      "content-length",
      "etag",
      "x-amz-version-id",
      "content-type",
      "x-amz-request-id",
      "x-amz-id-2",
      "date",
      "x-amz-cf-id",
      "x-amz-storage-class",
      "access-control-expose-headers"
    ],
    "MaxAgeSeconds": 3000
  }
]
```

4. Choose **Save changes** to update the CORS.

Step 4: Add a user to your Transfer Family web app

Add the user that you previously created in IAM Identity Center.

To assign users to a Transfer Family web app

1. Navigate to the web app that you created earlier.
2. Choose **Assign users and groups**.

The screenshot displays the configuration page for a web app. At the top, there are buttons for 'Assign users and groups', 'Clear customization', and 'Delete'. Below this is the 'Web app details' section, which includes:

- Web app endpoint:** <https://webapp-2.on.aws> (us-east-2)
- Access endpoint:** <https://>
- Identity provider:** IAM Identity Center
- IAM role:** arn:aws:iam:::role/web-app-identity-bearer

Below the details is a tabbed interface with 'Users' and 'Groups'. The 'Users' tab is active, showing a table with one user entry. The table has columns for 'Userid', 'Display name', and 'Username'.

Userid	Display name	Username
[Redacted]	[Redacted]	[Redacted]

3. To assign the user that you previously created in IAM Identity Center, select **Assign existing users and groups** and select **Next**.
 - a. Search for the user by the display name. Note that no users appear until you begin entering your search criteria. To add **Bob Stiles**, enter **bob** in the search box. If you can't find your user, navigate to the IAM Identity Center management console, find the user, then copy and paste their display name here.
 - b. Choose the **Bob Stiles** user, then choose **Assign**.

Step 5: Register a location in Amazon S3 and create an access grant

After you assign a user to your web app, you need to register a bucket and create an access grant for that user.

Note

You must have an S3 Access Grants instance before you can proceed. For details, see [Create an S3 Access Grants instance](#) in the *Amazon Simple Storage Service User Guide*.

To register a location and create an access grant

1. Sign in to the Amazon Web Services Management Console and open the Amazon S3 console at <https://console.amazonaws.cn/s3/>.
2. Choose **Access Grants** from the left navigation pane.
3. Choose **View details** to see the details for your S3 Access Grants instance.
4. Select the **Locations** tab, then choose **Register location**.
5. Provide the following information.
 - For the **Scope**, browse for a bucket or enter the name of your bucket, and optionally a prefix. Note that the scope begins with the string **s3://**.
 - For the IAM role, choose **Create new role** to have Amazon S3 create a role. This role allows S3 Access Grants to access your specified location scope.

Amazon S3 > Access Grants > US East (N. Virginia) us-east-1: default > Register location

Register location info

Registering a location for S3 your S3 Access Grants instance assigns an IAM role the permission to get temporary credentials to access resources within the specified scope.

Location info

Location scope info
You can't edit the location scope after registering the location.

Scope

s3:// View external link icon Browse S3

Format for all buckets: s3://
Format for bucket: s3://<bucket>
Format for prefix: s3://<bucket>/<prefix-with-path>

Permissions
This IAM role allows S3 Access Grants to access your specified location scope.

i To ensure the role has proper permissions to access the location scope, consult the [list of permissions](#) external link icon.

IAM role info
This IAM role allows S3 Access Grants to access your specified location scope.

Create new role
 Choose from existing IAM roles
 Enter IAM role ARN

Cancel Register location

Choose **Register location** to continue.

6. Select the **Grants** tab, then choose **Create Grant** and provide the following details.
 - For **Location**, select **Browse locations** and choose the location that you registered in the previous step.
 - For **Subprefix**, enter * to indicate that the access grant applies to the entire bucket.
 - For **Permissions**, select **Read** and **Write**.
 - For **Grantee type**, choose **Directory identity from IAM Identity Center**.
 - For **Directory identity type**, select **User**.
 - In **IAM Identity Center user/ ID**, copy and paste the user ID for **Bob Stiles**. This ID is available in the **Users** pane in your Transfer Family web app.
7. Choose **Create Grant**.

The access grant is created.

Step 6: Access your Transfer Family web app as a user

Now, we navigate to the web app's URL and log in as the user that we assigned earlier.

To log onto the Transfer Family web app

1. Navigate to your web app
2. Choose the **Access endpoint** from the **Web app details** pane.


The screenshot displays the Amazon Transfer Family console interface for a web application. At the top, the name 'webapp-' is followed by a redacted ID. Action buttons include 'Assign users and groups' (orange), 'Clear customization' (blue), and 'Delete' (blue). Below this is a 'Web app details' section with an 'Edit' button. It contains:

- Access endpoint**: A link to 'https://webapp-...transfer-webapp.us-east-2.on.aws' with an 'Info' icon.
- Web app endpoint**: A link to 'https://webapp-...transfer-webapp.us-east-2.on.aws' with a copy icon.
- Web app units**: Shows '1' with an 'Info' icon.
- Identity provider**: 'IAM Identity Center' with a copy icon.
- IAM role**: A redacted role name with a copy icon.
- Instance ARN**: 'arn:aws:sso::instance/ssoins-' followed by a redacted ID.

 Below the details is a tabbed interface with 'Users' selected and 'Groups' available. The 'Users (1)' section includes a 'Delete' button, a search bar for resources, and a table with columns for 'Display name', 'User ID', and 'Username'. One user is listed: 'Bob Stiles' with a copy icon, a redacted User ID, and the username 'bobstiles'.

3. On the sign in screen, enter the user you created, **bobstiles**, then select **Next**.
4. Enter the password that the system assigned to this user when created and select **Next**.
5. If your organization requires multi-factor authentication (MFA), you need to set it up now. If not, skip ahead to step 6.
 - a. You are presented with a screen to register your MFA device. Choose one of the available options and select **Next**.
 - b. Perform the necessary steps to configure MFA for this user: the steps depend upon the MFA option you chose.
 - c. You may have to set a new password for your user: if required, do so now. The system may also require that you sign in again, using the new MFA credentials that you configured.


Your use should see a screen similar to the following. Note that this screenshot includes customization for the favicon and logo.

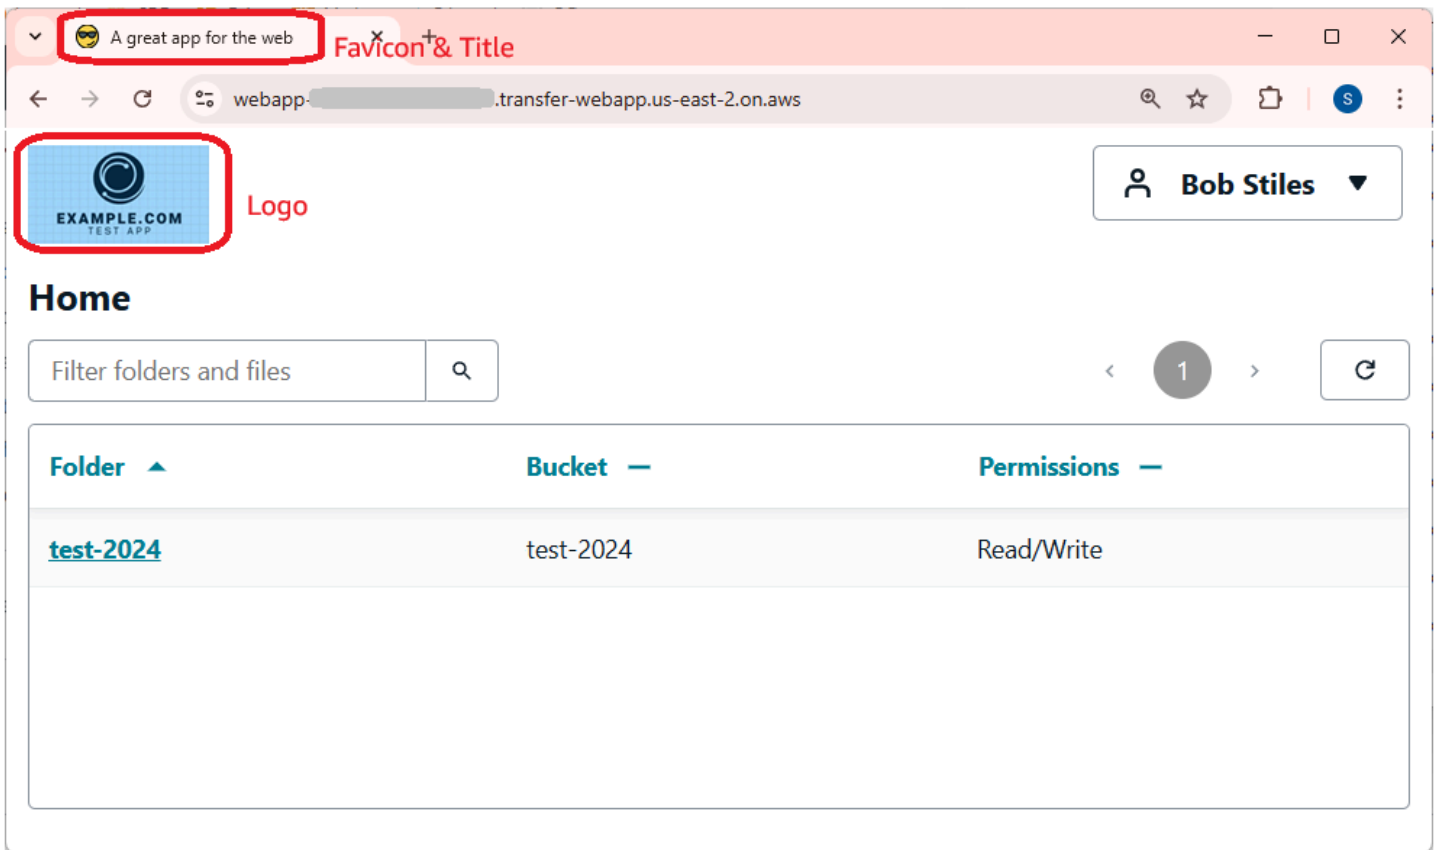



Integrate Okta as your identity provider for web apps

You can integrate an external identity provider with Transfer Family web apps. This section describes how to set up Okta as your identity provider.

1. In Okta, create a user, group, and application. For details on how to do this, see [Configure SAML and SCIM with Okta and IAM Identity Center](#).

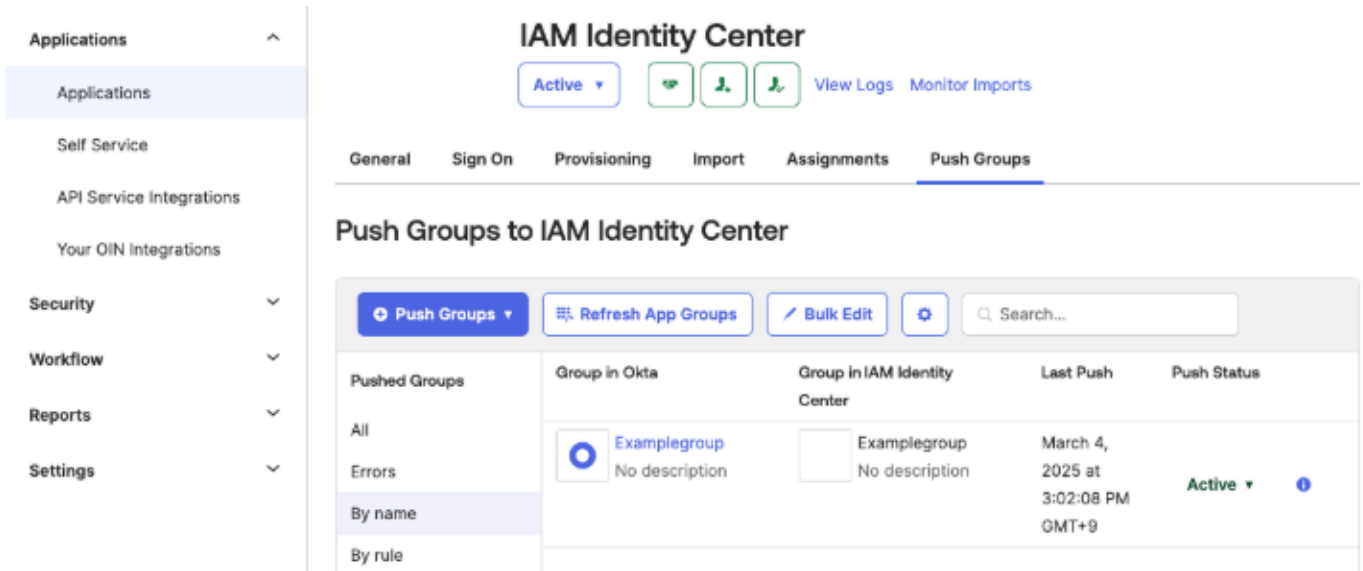

2. Connect Okta and import user and group from Okta to Amazon IAM Identity Center. Follow steps 1–4 in [Configure SAML and SCIM with Okta and IAM Identity Center](#).

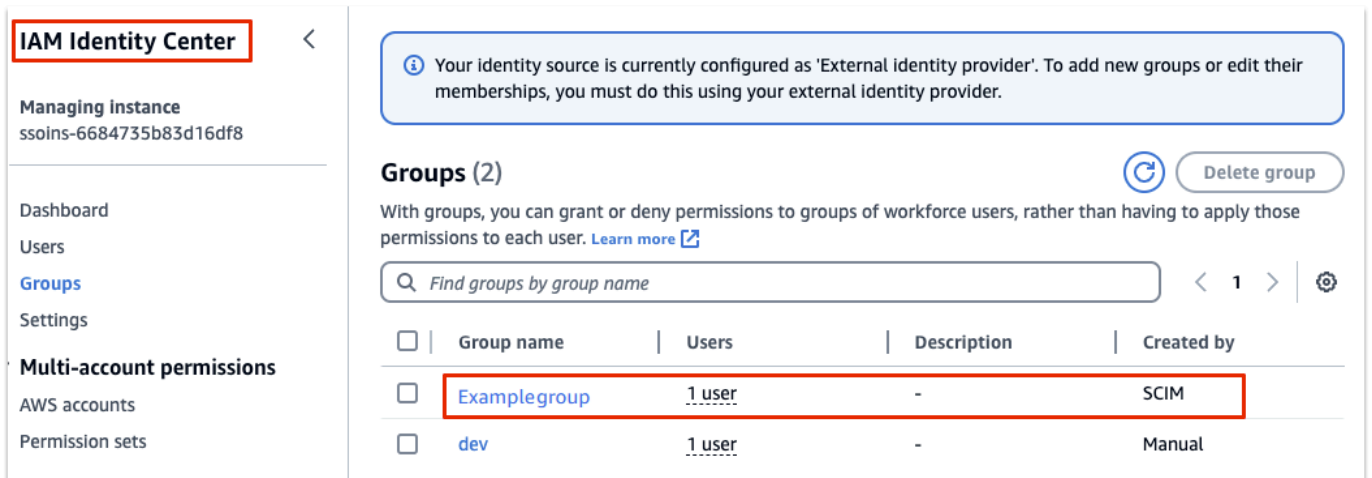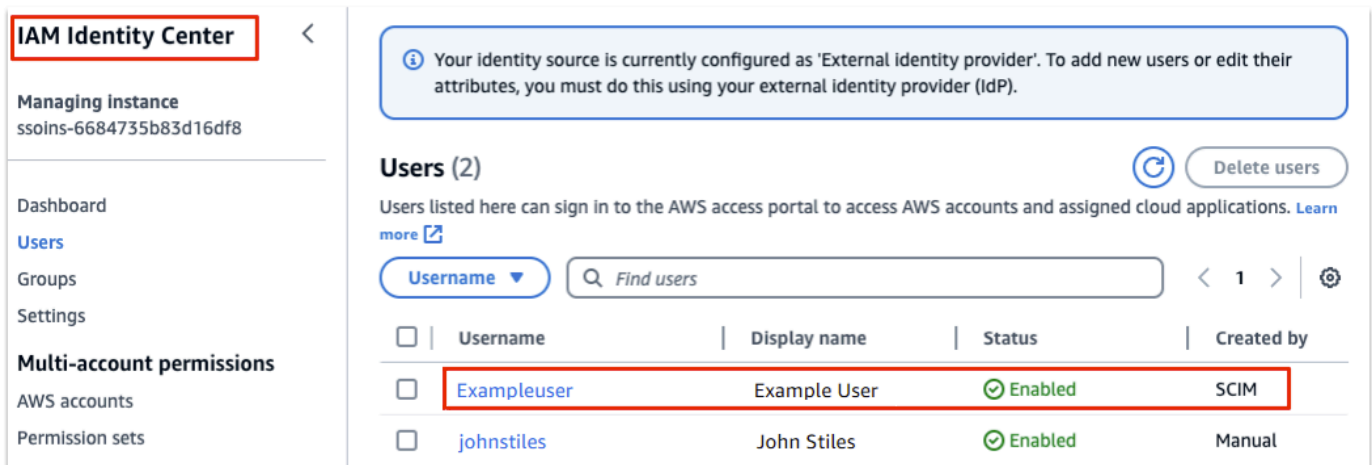

3. Confirm that the identity source in IAM Identity Center is SAML 2.0.

Settings

Details

Configure your identity source and multi-factor authentication settings for use when managing access to your accounts, resources, and cloud applications.

Instance name - Edit <input type="text"/>	Instance ID ssoins- <input type="text"/>	Organization ID <input type="checkbox"/> Organizations not enabled
Region US East (Ohio) us-east-2	Date created Thursday, November 14, 2024 at 4:11:19 PM EST	Instance ARN <input type="checkbox"/> arn:aws:sso::instance/ssoins- <input type="text"/>

Identity source
Authentication
Management
Tags

Identity source

Choose the directory where you want to manage your users and groups. [Learn More](#)

Identity source
External identity provider

Authentication method SAML 2.0	Provisioning method SCIM
--	------------------------------------

AWS access portal URL <input type="checkbox"/> <a href="https://<input type=" text"=""> .awsapps.com/start">https:// <input type="text"/> .awsapps.com/start <input type="checkbox"/>	Identity store ID <input type="checkbox"/> d- <input type="text"/>
Issuer URL <input type="checkbox"/> <a href="https://identitycenter.amazonaws.com/ssoins-<input type=" text"=""> ">https://identitycenter.amazonaws.com/ssoins- <input type="text"/>	

Actions ▼

4. Assign your user and group, as described in [Step 4: Add a user to your Transfer Family web app](#).
5. To avoid having your users need to use MFA when logging into your web app, perform the following steps in Okta.
 - a. From the Okta admin console, access **[Applications] - [Applications]**, and select the Amazon IAM Identity Center application.
 - b. On the **Sign on** tab, select **[User authentication] - Edit**.
 - c. Select **Password only**.

After you perform all of the other steps for the tutorial, your user should be able to access your Transfer Family web app by navigating to the web app's access endpoint in a web browser.

Configuring an SFTP, FTPS, or FTP server endpoint

This topic provides details for creating and using Amazon Transfer Family server endpoints that use one or more of the SFTP, FTPS, and FTP protocols.

Topics

- [Identity provider options](#)
- [Amazon Transfer Family endpoint type matrix](#)
- [Configuring an SFTP, FTPS, or FTP server endpoint](#)
- [Transferring files over a server endpoint using a client](#)
- [Managing users for server endpoints](#)
- [Using logical directories to simplify your Transfer Family directory structures](#)

Identity provider options

Amazon Transfer Family provides several methods for authenticating and managing users. The following table compares the available identity providers that you can use with Transfer Family.

Action	Amazon Transfer Family service managed	Amazon Managed Microsoft AD	Amazon API Gateway	Amazon Lambda
Supported protocols	SFTP	SFTP, FTPS, FTP	SFTP, FTPS, FTP	SFTP, FTPS, FTP
Key-based authentication	Yes	No	Yes	Yes
Password authentication	No	Yes	Yes	Yes
Amazon Identity and Access	Yes	Yes	Yes	Yes

Action	Amazon Transfer Family service managed	Amazon Managed Microsoft AD	Amazon API Gateway	Amazon Lambda
Management (IAM) and POSIX				
Logical home directory	Yes	Yes	Yes	Yes
Parameterized access (username-based)	Yes	Yes	Yes	Yes
Ad hoc access structure	Yes	No	Yes	Yes
Amazon WAF	No	No	Yes	No

Notes:

- IAM is used to control access for Amazon S3 backing storage, and POSIX is used for Amazon EFS.
- *Ad hoc* refers to the ability to send the user profile at runtime. For example, you can land users in their home directories by passing the username as a variable.
- For details about Amazon WAF, see [Add a web application firewall](#).
- There is a blog post that describes using a Lambda function integrated with Microsoft Entra ID (formerly Azure AD) as your Transfer Family identity provider. For details, see [Authenticating to Amazon Transfer Family with Azure Active Directory and Amazon Lambda](#).
- We provide several Amazon CloudFormation templates to help you quickly deploy a Transfer Family server that uses a custom identity provider. For details, see [Lambda function templates](#).

In the following procedures, you can create an SFTP-enabled server, FTPS-enabled server, FTP-enabled server, or AS2-enabled server.

Next step

- [Create an SFTP-enabled server](#)
- [Create an FTPS-enabled server](#)
- [Create an FTP-enabled server](#)
- [Configuring AS2](#)

Amazon Transfer Family endpoint type matrix

When you create a Transfer Family server, you choose the type of endpoint to use. The following table describes characteristics for each type of endpoint.

Endpoint type matrix

Characteristic	Public	VPC - Internet	VPC - Internal	VPC_Endpoint (deprecated)
Supported protocols	SFTP	SFTP, FTPS, AS2	SFTP, FTP, FTPS, AS2	SFTP
Access	From over the internet. This endpoint type doesn't require any special configuration in your VPC.	Over the internet and from within VPC and VPC-connected environments, such as an on-premises data center over Amazon Direct Connect or VPN.	From within VPC and VPC-connected environments, such as an on-premises data center over Amazon Direct Connect or VPN.	From within VPC and VPC-connected environments, such as an on-premises data center over Amazon Direct Connect or VPN.
Static IP address	You can't attach a static IP address. Amazon provides IP addresses that are subject to change.	You can attach Elastic IP addresses to the endpoint. These can be Amazon-owned IP addresses or your own	Private IP addresses attached to the endpoint don't change.	Private IP addresses attached to the endpoint don't change.

Characteristic	Public	VPC - Internet	VPC - Internal	VPC_Endpoint (deprecated)
		<p>IP addresses (Bring your own IP addresses). Elastic IP addresses attached to the endpoint don't change.</p> <p>Private IP addresses attached to the server also don't change.</p>		

Characteristic	Public	VPC - Internet	VPC - Internal	VPC_Endpoint (deprecated)
Source IP allow list	<p>This endpoint type does not support allow lists by source IP addresses.</p> <p>The endpoint is publicly accessible and listens for traffic over port 22.</p> <div data-bbox="402 814 649 1654" style="border: 1px solid #0070C0; border-radius: 10px; padding: 10px; margin-top: 10px;"> <p>Note</p> <p>For VPC-hosted endpoints, SFTP Transfer Family servers can operate over port 22 (the default), 2222, 2223, or 22000.</p> </div>	<p>To allow access by source IP address, you can use security groups attached to the server endpoints and network ACLs attached to the subnet that the endpoint is in.</p>	<p>To allow access by source IP address, you can use security groups attached to the server endpoints and network access control lists (network ACLs) attached to the subnet that the endpoint is in.</p>	<p>To allow access by source IP address, you can use security groups attached to the server endpoints and network ACLs attached to the subnet that the endpoint is in.</p>

Characteristic	Public	VPC - Internet	VPC - Internal	VPC_Endpoint (deprecated)
Client firewall allow list	<p>You must allow the DNS name of the server.</p> <p>Because IP addresses are subject to change, avoid using IP addresses for your client firewall allow list.</p>	<p>You can allow the DNS name of the server or the Elastic IP addresses attached to the server.</p>	<p>You can allow the private IP addresses or the DNS name of the endpoints.</p>	<p>You can allow the private IP addresses or the DNS name of the endpoints.</p>

Note

The VPC_ENDPOINT endpoint type is now deprecated and cannot be used to create new servers. Instead of using `EndpointType=VPC_ENDPOINT`, use the new VPC endpoint type (`EndpointType=VPC`), which you can use as either **Internal** or **Internet Facing**, as described in the preceding table. For details, see [Discontinuing the use of VPC_ENDPOINT](#).

Consider the following options to increase the security posture of your Amazon Transfer Family server:

- Use a VPC endpoint with internal access, so that the server is accessible only to clients within your VPC or VPC-connected environments such as an on-premises data center over Amazon Direct Connect or VPN.
- To allow clients to access the endpoint over the internet and protect your server, use a VPC endpoint with internet-facing access. Then, modify the VPC's security groups to allow traffic only from certain IP addresses that host your users' clients.

- If you require password-based authentication and you use a custom identity provider with your server, it's a best practice that your password policy prevents users from creating weak passwords and limits the number of failed login attempts.
- Amazon Transfer Family is a managed service, and so it doesn't provide shell access. You cannot directly access the underlying SFTP server to run OS native commands on Transfer Family servers.
- Use a Network Load Balancer in front of a VPC endpoint with internal access. Change the listener port on the load balancer from port 22 to a different port. This can reduce, but not eliminate, the risk of port scanners and bots probing your server, because port 22 is most commonly used for scanning. For details, see the blog post [Network Load Balancers now support Security groups](#).

Note

If you use a Network Load Balancer, the Amazon Transfer Family CloudWatch logs show the IP address for the NLB, rather than the actual client IP address.

Configuring an SFTP, FTPS, or FTP server endpoint

You can create a file transfer server by using the Amazon Transfer Family service. The following file transfer protocols are available:

- Secure Shell (SSH) File Transfer Protocol (SFTP) – File transfer over SSH. For details, see [the section called “Create an SFTP-enabled server”](#).

Note

We provide an Amazon CDK example for creating an SFTP Transfer Family server. The example uses TypeScript, and is available on GitHub [here](#).

- File Transfer Protocol Secure (FTPS) – File transfer with TLS encryption. For details, see [the section called “Create an FTPS-enabled server”](#).
- File Transfer Protocol (FTP) – Unencrypted file transfer. For details, see [the section called “Create an FTP-enabled server”](#).
- Applicability Statement 2 (AS2) – File transfer for transporting structured business-to-business data. For details, see [the section called “Configure AS2”](#). For AS2, you can quickly create an

Amazon CloudFormation stack for demonstration purposes. This procedure is described in [Use a template to create a demo Transfer Family AS2 stack](#).

You can create a server with multiple protocols.

Note

If you have multiple protocols enabled for the same server endpoint and you want to provide access by using the same username over multiple protocols, you can do so as long as the credentials specific to the protocol have been set up in your identity provider. For FTP, we recommend maintaining separate credentials from SFTP and FTPS. This is because, unlike SFTP and FTPS, FTP transmits credentials in clear text. By isolating FTP credentials from SFTP or FTPS, if FTP credentials are shared or exposed, your workloads using SFTP or FTPS remain secure.

When you create a server, you choose a specific Amazon Web Services Region to perform the file operation requests of users who are assigned to that server. Along with assigning the server one or more protocols, you also assign one of the following identity provider types:

- **Service managed by using SSH keys.** For details, see [Working with service-managed users](#).
- **Amazon Directory Service for Microsoft Active Directory (Amazon Managed Microsoft AD).** This method allows you integrate your Microsoft Active Directory groups to provide access to your Transfer Family servers. For details, see [Using Amazon Directory Service for Microsoft Active Directory](#).
- **A custom identity provider.** Transfer Family offers several options for using a custom identity provider, as described in the [Working with custom identity providers](#) topic.

You also assign the server an endpoint type (publicly accessible or VPC hosted) and a hostname by using the default server endpoint, or a custom hostname by using the Amazon Route 53 service or by using a Domain Name System (DNS) service of your choice. A server hostname must be unique in the Amazon Web Services Region where it's created.

Additionally, you can assign an Amazon CloudWatch logging role to push events to your CloudWatch logs, choose a security policy that contains the cryptographic algorithms that are enabled for use by your server, and add metadata to the server in the form of tags that are key-value pairs.

⚠ Important

You incur costs for instantiated servers and for data transfer. For information about pricing and to use Amazon Pricing Calculator to get an estimate of the cost to use Transfer Family, see [Amazon Transfer Family pricing](#).

Create an SFTP-enabled server

Secure Shell (SSH) File Transfer Protocol (SFTP) is a network protocol used for secure transfer of data over the internet. The protocol supports the full security and authentication functionality of SSH. It's widely used to exchange data, including sensitive information between business partners in a variety of industries such as financial services, healthcare, retail, and advertising.

Note the following

- SFTP servers for Transfer Family operate over port 22. For VPC-hosted endpoints, SFTP Transfer Family servers can also operate over port 2222, 2223 or 22000. For details, see [Create a server in a virtual private cloud](#).
- Public endpoints cannot restrict traffic via security groups. To use security groups with your Transfer Family server, you must host your server's endpoint inside a virtual private cloud (VPC) as described in [Create a server in a virtual private cloud](#).


See also

- We provide an Amazon CDK example for creating an SFTP Transfer Family server. The example uses TypeScript, and is available on GitHub [here](#).
- For a walkthrough of how to deploy a Transfer Family server inside of a VPC, see [Use IP allow list to secure your Amazon Transfer Family servers](#).

To create an SFTP-enabled server

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/> and select **Servers** from the navigation pane, then choose **Create server**.
2. In **Choose protocols**, select **SFTP**, and then choose **Next**.
3. In **Choose an identity provider**, choose the identity provider that you want to use to manage user access. You have the following options:

- **Service managed** – You store user identities and keys in Amazon Transfer Family.
- **Amazon Directory Service for Microsoft Active Directory** – You provide an Amazon Directory Service directory to access the endpoint. By doing so, you can use credentials stored in your Active Directory to authenticate your users. To learn more about working with Amazon Managed Microsoft AD identity providers, see [Using Amazon Directory Service for Microsoft Active Directory](#).

 **Note**

- Cross-Account and Shared directories are not supported for Amazon Managed Microsoft AD.
- To set up a server with Directory Service as your identity provider, you need to add some Amazon Directory Service permissions. For details, see [Before you start using Amazon Directory Service for Microsoft Active Directory](#).

- **Custom identity provider** – Choose either of the following options:
 - **Use Amazon Lambda to connect your identity provider** – You can use an existing identity provider, backed by a Lambda function. You provide the name of the Lambda function. For more information, see [Using Amazon Lambda to integrate your identity provider](#).
 - **Use Amazon API Gateway to connect your identity provider** – You can create an API Gateway method backed by a Lambda function for use as an identity provider. You provide an Amazon API Gateway URL and an invocation role. For more information, see [Using Amazon API Gateway to integrate your identity provider](#).

Choose an identity provider

Identity Provider for SFTP, FTPS, or FTP

Identity provider type
An identity provider manages user access for authentication and authorization

Service managed
Create and manage users within the service

Directory Service
Enable users in Managed AD or use your own self-managed AD in your on-premises environment or in

Custom Identity Provider
Manage users by integrating an identity provider of your choice

Use Lambda to connect your identity provider [Info](#)
Invoke an Lambda function to call your identity provider's API for user authentication and authorization

Use Amazon API Gateway to connect your identity provider [Info](#)
Use a RESTful API method to call your identity provider's API for user authentication and authorization

Lambda function

Choose a Lambda function ↻

Authentication methods
Choose which authentication methods are required for users to connect to your server

Password OR public key

Password ONLY

Public Key ONLY

Password AND public key

i Either a valid password or valid private key will be required during user authentication

Cancel Previous Next

4. Choose **Next**.
5. In **Choose an endpoint**, do the following:
 - a. For **Endpoint type**, choose the **Publicly accessible** endpoint type. For a **VPC hosted** endpoint, see [Create a server in a virtual private cloud](#).
 - b. (Optional) For **Custom hostname**, choose **None**.

You get a server hostname provided by Amazon Transfer Family. The server hostname takes the form `serverId.server.transfer.regionId.amazonaws.com`.

For a custom hostname, you specify a custom alias for your server endpoint. To learn more about working with custom hostnames, see [Working with custom hostnames](#).

- c. (Optional) For **FIPS Enabled**, select the **FIPS Enabled endpoint** check box to ensure that the endpoint complies with Federal Information Processing Standards (FIPS).

 **Note**

FIPS-enabled endpoints are only available in North American Amazon Regions. For available Regions, see [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*. For more information about FIPS, see [Federal Information Processing Standard \(FIPS\) 140-2](#).

- d. Choose **Next**.

6. On the **Choose domain** page, choose the Amazon storage service that you want to use to store and access your data over the selected protocol:

- Choose **Amazon S3** to store and access your files as objects over the selected protocol.
- Choose **Amazon EFS** to store and access your files in your Amazon EFS file system over the selected protocol.

Choose **Next**.

7. In **Configure additional details**, do the following:

- a. For logging, specify an existing log group or create a new one (the default option). If you choose an existing log group, you must select one that is associated with your Amazon Web Services account.

Transfer Family > Servers > Create server

Step 1
Choose protocols

Step 2
Choose an identity provider

Step 3
Choose an endpoint

Step 4
Choose a domain

Step 5
Configure additional details

Step 6
Review and create

Configure additional details

Logging Info

Log group Info
Choose the CloudWatch log group where your events will be delivered in a structured JSON format

Create a new log group
 Choose an existing log group

Logging role Info
Choose the IAM role that will be used to deliver events to your CloudWatch logs

Create a new role
 Choose an existing role

Info Logging role is only required when selecting a workflow in the Managed workflows section below.

If you choose **Create log group**, the CloudWatch console (<https://console.amazonaws.cn/cloudwatch/>) opens to the **Create log group** page. For details, see [Create a log group in CloudWatch Logs](#).

- b. (Optional) For **Managed workflows**, choose workflow IDs (and a corresponding role) that Transfer Family should assume when executing the workflow. You can choose one workflow to execute upon a complete upload, and another to execute upon a partial upload. To learn more about processing your files by using managed workflows, see [Amazon Transfer Family managed workflows](#).

Managed workflows Info


Workflow for complete file uploads
Select the workflow that Transfer Family should run on all files that are uploaded in full via this server

Workflow for partial file uploads
Select the workflow that Transfer Family should run on all files that are only partially uploaded via this server

Managed workflows execution role Info
Select the role that Transfer Family should assume when executing a workflow

- c. For **Cryptographic algorithm options**, choose a security policy that contains the cryptographic algorithms enabled for use by your server. Our latest security policy is the default: for details, see [Security policies for Amazon Transfer Family servers](#).
- d. (Optional) For **Server Host Key**, enter an RSA, ED25519, or ECDSA private key that will be used to identify your server when clients connect to it over SFTP. You can also add a description to differentiate among multiple host keys.

After you create your server, you can add additional host keys. Having multiple host keys is useful if you want to rotate keys or if you want to have different types of keys, such as an RSA key and also an ECDSA key.

 **Note**

The **Server Host Key** section is used only for migrating users from an existing SFTP-enabled server.

- e. (Optional) For **Tags**, for **Key** and **Value**, enter one or more tags as key-value pairs, and then choose **Add tag**.
- f. Choose **Next**.
- g. You can optimize performance for your Amazon S3 directories. For example, suppose that you go into your home directory, and you have 10,000 subdirectories. In other words, your Amazon S3 bucket has 10,000 folders. In this scenario, if you run the `ls` (list) command, the list operation takes between six and eight minutes. However, if you optimize your directories, this operation takes only a few seconds.

When you create your server using the console, optimized directories is enabled by default. If you create your server using the API, this behavior is not enabled by default.

Optimized Directories [Info](#)

Your logical directories can now support mappings up to 2.1MB for both Amazon S3 and EFS

Select this option to improve performance of the listing of your folders in your S3 bucket

Enable

Turning this option off restores to the default performance to list your S3 directory

- h. (Optional) Configure Amazon Transfer Family servers to display customized messages such as organizational policies or terms and conditions to your end users. For **Display banner**, in the **Pre-authentication display banner** text box, enter the text message that you want to display to your users before they authenticate.
- i. (Optional) You can configure the following additional options.
 - **SetStat option:** enable this option to ignore the error that is generated when a client attempts to use SETSTAT on a file you are uploading to an Amazon S3 bucket. For additional details, see the `SetStatOption` documentation in the [ProtocolDetails](#).
 - **TLS session resumption:** this option is only available if you have enabled FTPS as one of the protocols for this server.
 - **Passive IP:** this option is only available if you have enabled FTPS or FTP as one of the protocols for this server.


Additional configuration

SetStat option - optional [Info](#)
Select whether you want this server to ignore SetStat command

Enable


TLS session resumption - optional [Info](#)
Choose how you want your server to process TLS session resumption requests

Enforce
 Enable
 Disable

 To enable TLS session resumption, enable FTPS as one of the protocols selected in Step 1


Passive IP - optional [Info](#)
Provide passive IP (PASV) that file transfer clients can use to connect this server

1.2.3.4

 To enable Passive IP, enable FTP or FTPS as one of the protocols selected in Step 1

8. In **Review and create**, review your choices.

- If you want to edit any of them, choose **Edit** next to the step.

 **Note**

You must review each step after the step that you chose to edit.

- If you have no changes, choose **Create server** to create your server. You are taken to the **Servers** page, shown following, where your new server is listed.

It can take a couple of minutes before the status for your new server changes to **Online**. At that point, your server can perform file operations, but you'll need to create a user first. For details on creating users, see [Managing users for server endpoints](#).

Create an FTPS-enabled server

File Transfer Protocol over SSL (FTPS) is an extension to FTP. It uses Transport Layer Security (TLS) and Secure Sockets Layer (SSL) cryptographic protocols to encrypt traffic. FTPS allows encryption of both the control and data channel connections either concurrently or independently.

To create an FTPS-enabled server

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/> and select **Servers** from the navigation pane, then choose **Create server**.
2. In **Choose protocols**, select **FTPS**.

For **Server certificate**, choose a certificate stored in Amazon Certificate Manager (ACM) which will be used to identify your server when clients connect to it over FTPS and then choose **Next**.

To request a new public certificate, see [Request a public certificate](#) in the *Amazon Certificate Manager User Guide*.

To import an existing certificate into ACM, see [Importing certificates into ACM](#) in the *Amazon Certificate Manager User Guide*.

To request a private certificate to use FTPS through private IP addresses, see [Requesting a Private Certificate](#) in the *Amazon Certificate Manager User Guide*.

Certificates with the following cryptographic algorithms and key sizes are supported:

- 2048-bit RSA (RSA_2048)
- 4096-bit RSA (RSA_4096)
- Elliptic Prime Curve 256 bit (EC_prime256v1)
- Elliptic Prime Curve 384 bit (EC_secp384r1)
- Elliptic Prime Curve 521 bit (EC_secp521r1)

Note

The certificate must be a valid SSL/TLS X.509 version 3 certificate with FQDN or IP address specified and contain information about the issuer.

3. In **Choose an identity provider**, choose the identity provider that you want to use to manage user access. You have the following options:
 - **Amazon Directory Service for Microsoft Active Directory** – You provide an Amazon Directory Service directory to access the endpoint. By doing so, you can use credentials stored in your Active Directory to authenticate your users. To learn more about working with Amazon Managed Microsoft AD identity providers, see [Using Amazon Directory Service for Microsoft Active Directory](#).

Note

- Cross-Account and Shared directories are not supported for Amazon Managed Microsoft AD.
- To set up a server with Directory Service as your identity provider, you need to add some Amazon Directory Service permissions. For details, see [Before you start using Amazon Directory Service for Microsoft Active Directory](#).

- **Custom identity provider** – Choose either of the following options:
 - **Use Amazon Lambda to connect your identity provider** – You can use an existing identity provider, backed by a Lambda function. You provide the name of the Lambda function. For more information, see [Using Amazon Lambda to integrate your identity provider](#).
 - **Use Amazon API Gateway to connect your identity provider** – You can create an API Gateway method backed by a Lambda function for use as an identity provider. You provide an Amazon API Gateway URL and an invocation role. For more information, see [Using Amazon API Gateway to integrate your identity provider](#).

Choose an identity provider

Identity Provider for SFTP, FTPS, or FTP

Identity provider type

An identity provider manages user access for authentication and authorization

Service managed
Create and manage users within the service

Directory Service [Info](#)
Enable users in Managed AD or use your own self-managed AD in your on-premises environment or in

Custom Identity Provider [Info](#)
Manage users by integrating an identity provider of your choice

- Use Lambda to connect your identity provider [Info](#)
Invoke an Lambda function to call your identity provider's API for user authentication and authorization
- Use Amazon API Gateway to connect your identity provider [Info](#)
Use a RESTful API method to call your identity provider's API for user authentication and authorization

Lambda function



Authentication methods

Choose which authentication methods are required for users to connect to your server

- Password OR public key
- Password ONLY
- Public Key ONLY
- Password AND public key

[i](#) To choose an authentication method, enable SFTP as one of the protocols selected in Step 1

Cancel

Previous

Next

- Choose **Next**.
- In **Choose an endpoint**, do the following:

[i](#) Note


FTPS servers for Transfer Family operate over Port 21 (Control Channel) and Port Range 8192–8200 (Data Channel).

- a. For **Endpoint type**, choose the **VPC hosted** endpoint type to host your server's endpoint. For information about setting up your VPC hosted endpoint, see [Create a server in a virtual private cloud](#).

 **Note**

Publicly accessible endpoints are not supported.

- b. (Optional) For **FIPS Enabled**, select the **FIPS Enabled endpoint** check box to ensure that the endpoint complies with Federal Information Processing Standards (FIPS).

 **Note**

FIPS-enabled endpoints are only available in North American Amazon Regions. For available Regions, see [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*. For more information about FIPS, see [Federal Information Processing Standard \(FIPS\) 140-2](#).

- c. Choose **Next**.

Choose an endpoint

Endpoint configuration [Info](#)

Endpoint type
Select whether the endpoint will be publicly accessible or hosted inside your VPC

Publicly accessible
Accessible over the internet

VPC hosted [Info](#)
Access controlled using Security Groups

Access [Info](#)

Internal

Internet Facing

VPC
Select a VPC ID

FIPS Enabled
Select whether the endpoint should comply with Federal Information Processing Standards (FIPS)

FIPS Enabled endpoint

- On the **Choose domain** page, choose the Amazon storage service that you want to use to store and access your data over the selected protocol:
 - Choose **Amazon S3** to store and access your files as objects over the selected protocol.
 - Choose **Amazon EFS** to store and access your files in your Amazon EFS file system over the selected protocol.

Choose **Next**.

- In **Configure additional details**, do the following:
 - For logging, specify an existing log group or create a new one (the default option).

Transfer Family > Servers > Create server

Step 1
Choose protocols

Step 2
Choose an identity provider

Step 3
Choose an endpoint

Step 4
Choose a domain

Step 5
Configure additional details

Step 6
Review and create

Configure additional details

Logging Info

Log group Info
Choose the CloudWatch log group where your events will be delivered in a structured JSON format

Create a new log group
 Choose an existing log group

Logging role Info
Choose the IAM role that will be used to deliver events to your CloudWatch logs

Create a new role
 Choose an existing role

Info Logging role is only required when selecting a workflow in the Managed workflows section below.

If you choose **Create log group**, the CloudWatch console (<https://console.amazonaws.cn/cloudwatch/>) opens to the **Create log group** page. For details, see [Create a log group in CloudWatch Logs](#).

- b. (Optional) For **Managed workflows**, choose workflow IDs (and a corresponding role) that Transfer Family should assume when executing the workflow. You can choose one workflow to execute upon a complete upload, and another to execute upon a partial upload. To learn more about processing your files by using managed workflows, see [Amazon Transfer Family managed workflows](#).

Managed workflows Info


Workflow for complete file uploads
Select the workflow that Transfer Family should run on all files that are uploaded in full via this server

Workflow for partial file uploads
Select the workflow that Transfer Family should run on all files that are only partially uploaded via this server

Managed workflows execution role Info
Select the role that Transfer Family should assume when executing a workflow

- c. For **Cryptographic algorithm options**, choose a security policy that contains the cryptographic algorithms enabled for use by your server. Our latest security policy is the default: for details, see [Security policies for Amazon Transfer Family servers](#).
- d. For **Server Host Key**, keep it blank.
- e. (Optional) For **Tags**, for **Key** and **Value**, enter one or more tags as key-value pairs, and then choose **Add tag**.
- f. You can optimize performance for your Amazon S3 directories. For example, suppose that you go into your home directory, and you have 10,000 subdirectories. In other words, your Amazon S3 bucket has 10,000 folders. In this scenario, if you run the `ls` (list) command, the list operation takes between six and eight minutes. However, if you optimize your directories, this operation takes only a few seconds.

When you create your server using the console, optimized directories is enabled by default. If you create your server using the API, this behavior is not enabled by default.

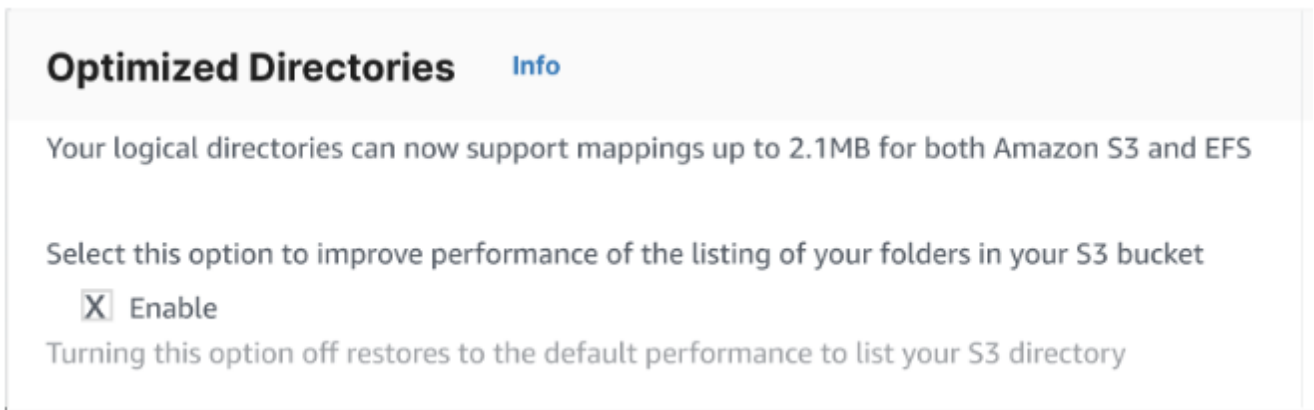

- g. Choose **Next**.
- h. (Optional) You can configure Amazon Transfer Family servers to display customized messages such as organizational policies or terms and conditions to your end users. You can also display customized Message of The Day (MOTD) to users who have successfully authenticated.

For **Display banner**, in the **Pre-authentication display banner** text box, enter the text message that you want to display to your users before they authenticate, and in the **Post-authentication display banner** text box, enter the text that you want to display to your users after they successfully authenticate.

- i. (Optional) You can configure the following additional options.

- **SetStat option:** enable this option to ignore the error that is generated when a client attempts to use SETSTAT on a file you are uploading to an Amazon S3 bucket. For additional details, see the SetStatOption documentation in the [ProtocolDetails](#) topic.
- **TLS session resumption:** provides a mechanism to resume or share a negotiated secret key between the control and data connection for an FTPS session. For additional details, see the TlsSessionResumptionMode documentation in the [ProtocolDetails](#) topic.
- **Passive IP:** indicates passive mode, for FTP and FTPS protocols. Enter a single IPv4 address, such as the public IP address of a firewall, router, or load balancer. For additional details, see the PassiveIp documentation in the [ProtocolDetails](#) topic.

Additional configuration

SetStat option - optional [Info](#)
Select whether you want this server to ignore SetStat command

Enable

TLS session resumption - optional [Info](#)
Choose how you want your server to process TLS session resumption requests

Enforce
 Enable
 Disable

Passive IP - optional [Info](#)
Provide passive IP (PASV) that file transfer clients can use to connect this server

1.2.3.4

8. In **Review and create**, review your choices.

- If you want to edit any of them, choose **Edit** next to the step.

Note

You must review each step after the step that you chose to edit.

- If you have no changes, choose **Create server** to create your server. You are taken to the **Servers** page, shown following, where your new server is listed.

It can take a couple of minutes before the status for your new server changes to **Online**. At that point, your server can perform file operations for your users.

Next steps: For the next step, continue on to [Working with custom identity providers](#) to set up users.

Create an FTP-enabled server

File Transfer Protocol (FTP) is a network protocol used for the transfer of data. FTP uses a separate channel for control and data transfers. The control channel is open until terminated or inactivity timeout. The data channel is active for the duration of the transfer. FTP uses clear text and does not support encryption of traffic.

Note

When you enable FTP, you must choose the internal access option for the VPC-hosted endpoint. If you need your server to have data traverse the public network, you must use secure protocols, such as SFTP or FTPS.

To create an FTP-enabled server

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/> and select **Servers** from the navigation pane, then choose **Create server**.
2. In **Choose protocols**, select **FTP**, and then choose **Next**.
3. In **Choose an identity provider**, choose the identity provider that you want to use to manage user access. You have the following options:
 - **Amazon Directory Service for Microsoft Active Directory** – You provide an Amazon Directory Service directory to access the endpoint. By doing so, you can use credentials stored in your Active Directory to authenticate your users. To learn more about working with Amazon Managed Microsoft AD identity providers, see [Using Amazon Directory Service for Microsoft Active Directory](#).

Note

- Cross-Account and Shared directories are not supported for Amazon Managed Microsoft AD.
- To set up a server with Directory Service as your identity provider, you need to add some Amazon Directory Service permissions. For details, see [Before you start using Amazon Directory Service for Microsoft Active Directory](#).

- **Custom identity provider** – Choose either of the following options:
 - **Use Amazon Lambda to connect your identity provider** – You can use an existing identity provider, backed by a Lambda function. You provide the name of the Lambda function. For more information, see [Using Amazon Lambda to integrate your identity provider](#).
 - **Use Amazon API Gateway to connect your identity provider** – You can create an API Gateway method backed by a Lambda function for use as an identity provider. You provide an Amazon API Gateway URL and an invocation role. For more information, see [Using Amazon API Gateway to integrate your identity provider](#).

Choose an identity provider

Identity Provider for SFTP, FTPS, or FTP

Identity provider type
An identity provider manages user access for authentication and authorization

Service managed
Create and manage users within the service

Directory Service [Info](#)
Enable users in Managed AD or use your own self-managed AD in your on-premises environment or in

Custom Identity Provider [Info](#)
Manage users by integrating an identity provider of your choice

Use Lambda to connect your identity provider [Info](#)
Invoke an Lambda function to call your identity provider's API for user authentication and authorization

Use Amazon API Gateway to connect your identity provider [Info](#)
Use a RESTful API method to call your identity provider's API for user authentication and authorization

 Lambda function

Choose a Lambda function
▼
↻

Authentication methods
Choose which authentication methods are required for users to connect to your server

Password OR public key

Password ONLY

Public Key ONLY

Password AND public key

i To choose an authentication method, enable SFTP as one of the protocols selected in Step 1

Cancel
Previous
Next

4. Choose **Next**.
5. In **Choose an endpoint**, do the following:

i **Note**

FTP servers for Transfer Family operate over Port 21 (Control Channel) and Port Range 8192–8200 (Data Channel).

- a. For **Endpoint type**, choose **VPC hosted** to host your server's endpoint. For information about setting up your VPC hosted endpoint, see [Create a server in a virtual private cloud](#).

Note

Publicly accessible endpoints are not supported.

- b. For **FIPS Enabled**, keep the **FIPS Enabled endpoint** check box cleared.

Note

FIPS-enabled endpoints are not supported for FTP servers.

- c. Choose **Next**.

Choose an endpoint

Endpoint configuration [Info](#)

Endpoint type
Select whether the endpoint will be publicly accessible or hosted inside your VPC

Publicly accessible
Accessible over the internet

VPC hosted [Info](#)
Access controlled using Security Groups

Access [Info](#)

Internal

Internet Facing

VPC
Select a VPC ID


FIPS Enabled
Select whether the endpoint should comply with Federal Information Processing Standards (FIPS)

FIPS Enabled endpoint

6. On the **Choose domain** page, choose the Amazon storage service that you want to use to store and access your data over the selected protocol.
 - Choose **Amazon S3** to store and access your files as objects over the selected protocol.
 - Choose **Amazon EFS** to store and access your files in your Amazon EFS file system over the selected protocol.

Choose **Next**.

7. In **Configure additional details**, do the following:
 - a. For logging, specify an existing log group or create a new one (the default option).

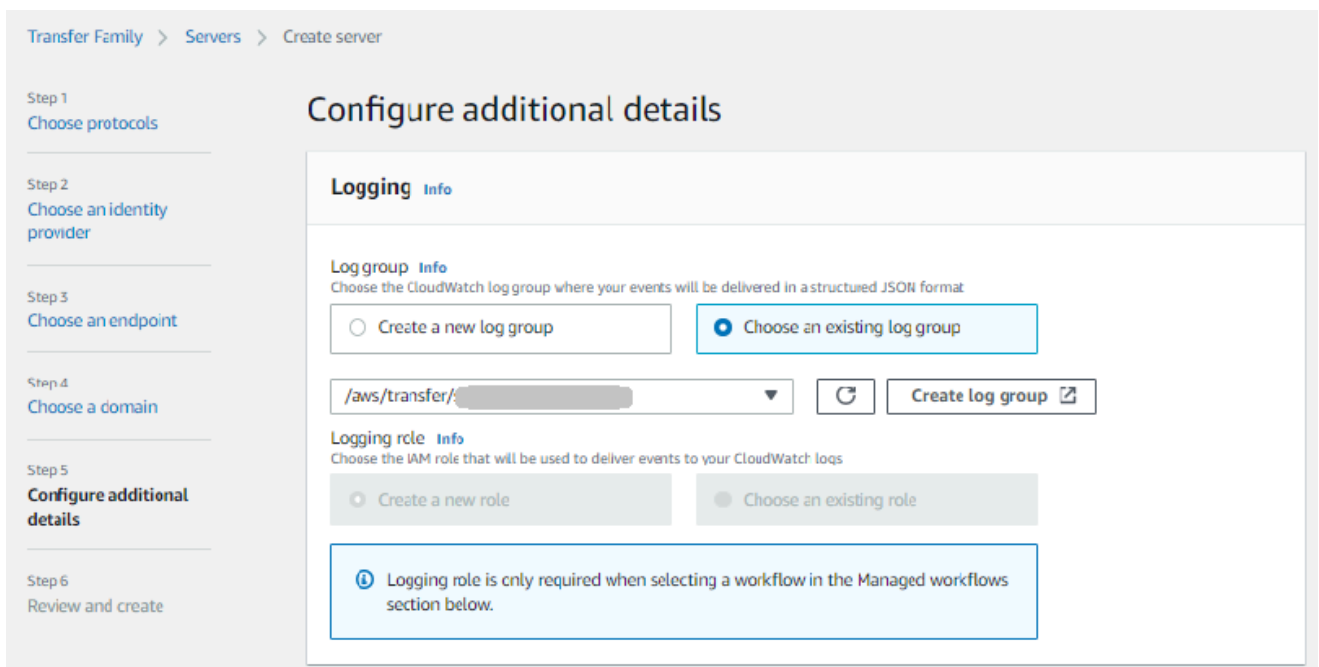

Transfer Family > Servers > Create server

Step 1
Choose protocols

Step 2
Choose an identity provider

Step 3
Choose an endpoint

Step 4
Choose a domain

Step 5
Configure additional details

Step 6
Review and create

Configure additional details

Logging Info

Log group Info
Choose the CloudWatch log group where your events will be delivered in a structured JSON format

Create a new log group Choose an existing log group

Logging role Info
Choose the IAM role that will be used to deliver events to your CloudWatch logs

Create a new role Choose an existing role

Info Logging role is only required when selecting a workflow in the Managed workflows section below.

If you choose **Create log group**, the CloudWatch console (<https://console.amazonaws.cn/cloudwatch/>) opens to the **Create log group** page. For details, see [Create a log group in CloudWatch Logs](#).

- b. (Optional) For **Managed workflows**, choose workflow IDs (and a corresponding role) that Transfer Family should assume when executing the workflow. You can choose one workflow to execute upon a complete upload, and another to execute upon a partial upload. To learn more about processing your files by using managed workflows, see [Amazon Transfer Family managed workflows](#).

The screenshot shows the 'Managed workflows' section in the Amazon Transfer Family console. It contains three configuration areas:

- Workflow for complete file uploads:** A dropdown menu with a placeholder 'w-...', a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Workflow for partial file uploads:** A dropdown menu with a placeholder 'w-...', a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Managed workflows execution role:** A dropdown menu with a placeholder and a refresh button.

- c. For **Cryptographic algorithm options**, choose a security policy that contains the cryptographic algorithms enabled for use by your server.

Note

Transfer Family assigns the latest security policy to your FTP server. However, since the FTP protocol doesn't use any encryption, FTP servers do not use any of the security policy algorithms. Unless your server also uses the FTPS or SFTP protocol, the security policy remains unused.

- d. For **Server Host Key**, keep it blank.
- e. (Optional) For **Tags**, for **Key** and **Value**, enter one or more tags as key-value pairs, and then choose **Add tag**.
- f. You can optimize performance for your Amazon S3 directories. For example, suppose that you go into your home directory, and you have 10,000 subdirectories. In other words, your Amazon S3 bucket has 10,000 folders. In this scenario, if you run the `ls` (list) command, the list operation takes between six and eight minutes. However, if you optimize your directories, this operation takes only a few seconds.

When you create your server using the console, optimized directories is enabled by default. If you create your server using the API, this behavior is not enabled by default.

Optimized Directories [Info](#)

Your logical directories can now support mappings up to 2.1MB for both Amazon S3 and EFS

Select this option to improve performance of the listing of your folders in your S3 bucket

Enable

Turning this option off restores to the default performance to list your S3 directory

- g. Choose **Next**.
- h. (Optional) You can configure Amazon Transfer Family servers to display customized messages such as organizational policies or terms and conditions to your end users. You can also display customized Message of The Day (MOTD) to users who have successfully authenticated.

For **Display banner**, in the **Pre-authentication display banner** text box, enter the text message that you want to display to your users before they authenticate, and in the **Post-authentication display banner** text box, enter the text that you want to display to your users after they successfully authenticate.

- i. (Optional) You can configure the following additional options.
 - **SetStat option:** enable this option to ignore the error that is generated when a client attempts to use SETSTAT on a file you are uploading to an Amazon S3 bucket. For additional details, see the `SetStatOption` documentation in the [ProtocolDetails](#) topic.
 - **TLS session resumption:** provides a mechanism to resume or share a negotiated secret key between the control and data connection for an FTPS session. For additional details, see the `TlsSessionResumptionMode` documentation in the [ProtocolDetails](#) topic.
 - **Passive IP:** indicates passive mode, for FTP and FTPS protocols. Enter a single IPv4 address, such as the public IP address of a firewall, router, or load balancer. For additional details, see the `PassiveIp` documentation in the [ProtocolDetails](#) topic.

Additional configuration

SetStat option - optional [Info](#)
Select whether you want this server to ignore SetStat command

Enable

TLS session resumption - optional [Info](#)
Choose how you want your server to process TLS session resumption requests

Enforce
 Enable
 Disable

Passive IP - optional [Info](#)
Provide passive IP (PASV) that file transfer clients can use to connect this server

1.2.3.4

8. In **Review and create**, review your choices.

- If you want to edit any of them, choose **Edit** next to the step.

Note

You must review each step after the step that you chose to edit.

- If you have no changes, choose **Create server** to create your server. You are taken to the **Servers** page, shown following, where your new server is listed.

It can take a couple of minutes before the status for your new server changes to **Online**. At that point, your server can perform file operations for your users.

Next steps – For the next step, continue on to [Working with custom identity providers](#) to set up users.

Create a server in a virtual private cloud

You can host your server's endpoint inside a virtual private cloud (VPC) to use for transferring data to and from an Amazon S3 bucket or Amazon EFS file system without going over the public internet.

Note

After May 19, 2021, you won't be able to create a server using `EndpointType=VPC_ENDPOINT` in your Amazon account if your account hasn't already done so before May 19, 2021. If you have already created servers with `EndpointType=VPC_ENDPOINT` in your Amazon account on or before February 21, 2021, you will not be affected. After this date, use `EndpointType=VPC`. For more information, see [the section called "Discontinuing the use of VPC_ENDPOINT"](#).

If you use Amazon Virtual Private Cloud (Amazon VPC) to host your Amazon resources, you can establish a private connection between your VPC and a server. You can then use this server to transfer data over your client to and from your Amazon S3 bucket without using public IP addressing or requiring an internet gateway.

Using Amazon VPC, you can launch Amazon resources in a custom virtual network. You can use a VPC to control your network settings, such as the IP address range, subnets, route tables, and network gateways. For more information about VPCs, see [What Is Amazon VPC?](#) in the *Amazon VPC User Guide*.

In the next sections, find instructions on how to create and connect your VPC to a server. As an overview, you do this as follows:

1. Set up a server using a VPC endpoint.
2. Connect to your server using a client that is inside your VPC through the VPC endpoint. Doing this enables you to transfer data that is stored in your Amazon S3 bucket over your client using Amazon Transfer Family. You can perform this transfer even though the network is disconnected from the public internet.
3. In addition, if you choose to make your server's endpoint internet-facing, you can associate Elastic IP addresses with your endpoint. Doing this lets clients outside of your VPC connect to your server. You can use VPC security groups to control access to authenticated users whose requests originate only from allowed addresses.

Topics

- [Create a server endpoint that can be accessed only within your VPC](#)
- [Create an internet-facing endpoint for your server](#)
- [Change the endpoint type for your server](#)
- [Discontinuing the use of VPC_ENDPOINT](#)
- [Updating the Amazon Transfer Family server endpoint type from VPC_ENDPOINT to VPC](#)

Create a server endpoint that can be accessed only within your VPC

In the following procedure, you create a server endpoint that is accessible only to resources within your VPC.

To create a server endpoint inside a VPC

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. From the navigation pane, select **Servers**, then choose **Create server**.
3. In **Choose protocols**, select one or more protocols, and then choose **Next**. For more information about protocols, see [Step 2: Create an SFTP-enabled server](#).
4. In **Choose an identity provider**, choose **Service managed** to store user identities and keys in Amazon Transfer Family, and then choose **Next**.


This procedure uses the service-managed option. If you choose **Custom**, you provide an Amazon API Gateway endpoint and an Amazon Identity and Access Management (IAM) role to access the endpoint. By doing so, you can integrate your directory service to authenticate and authorize your users. To learn more about working with custom identity providers, see [Working with custom identity providers](#).

5. In **Choose an endpoint**, do the following:
 - a. For **Endpoint type**, choose the **VPC hosted** endpoint type to host your server's endpoint.
 - b. For **Access**, choose **Internal** to make your endpoint only accessible to clients using the endpoint's private IP addresses.

For details on the **Internet Facing** option, see [Create an internet-facing endpoint for your server](#). A server that is created in a VPC for internal access only doesn't support custom hostnames.


- c. For **VPC**, choose an existing VPC ID or choose **Create a VPC** to create a new VPC.

- d. In the **Availability Zones** section, choose up to three Availability Zones and associated subnets.
- e. In the **Security Groups** section, choose an existing security group ID or IDs or choose **Create a security group** to create a new security group. For more information about security groups, see [Security groups for your VPC](#) in the *Amazon Virtual Private Cloud User Guide*. To create a security group, see [Creating a security group](#) in the *Amazon Virtual Private Cloud User Guide*.

 **Note**

Your VPC automatically comes with a default security group. If you don't specify a different security group or groups when you launch the server, we associate the default security group with your server.

- For the inbound rules for the security group, you can configure SSH traffic to use port 22, 2222, 22000, or any combination. Port 22 is configured by default. To use port 2222 or port 22000, you add an inbound rule to your security group. For the type, choose **Custom TCP**, then enter either **2222** or **22000** for **Port range**, and for the source, enter the same CIDR range that you have for your SSH port 22 rule.
- For the inbound rules for the security group, configure FTP and FTPS traffic to use **Port range 21** for the control channel and **8192-8200** for the data channel.

 **Note**

You can also use port 2223 for clients that require TCP "piggy-back" ACKs, or the ability for the final ack of the TCP 3-way handshake to also contain data. Some client software may be incompatible with port 2223: for example, a client that requires the server to send the SFTP Identification String before the client does.

VPC > Security Groups > sg-...-default > Edit inbound rules

Edit inbound rules Info

Inbound rules control the incoming traffic that's allowed to reach the instance.

Inbound rules Info

Security group rule ID	Type <small>Info</small>	Protocol <small>Info</small>	Port range <small>Info</small>	Source <small>Info</small>
sgr-...	HTTP	TCP	80	Custom 0.0.0.0/0
sgr-...	RDP	TCP	3389	Custom 0.0.0.0/0
sgr-...	HTTPS	TCP	443	Custom 0.0.0.0/0
sgr-...	Custom TCP	TCP	2222	Custom 72.21.196.64/32
sgr-...	SSH	TCP	22	Custom 72.21.196.64/32


- f. (Optional) For **FIPS Enabled**, select the **FIPS Enabled endpoint** check box to ensure the endpoint complies with Federal Information Processing Standards (FIPS).

Note

FIPS-enabled endpoints are only available in North American Amazon Regions. For available Regions, see [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*. For more information about FIPS, see [Federal Information Processing Standard \(FIPS\) 140-2](#).


- g. Choose **Next**.
6. In **Configure additional details**, do the following:
- For **CloudWatch logging**, choose one of the following to enable Amazon CloudWatch logging of your user activity:
 - **Create a new role** to allow Transfer Family to automatically create the IAM role, as long as you have the right permissions to create a new role. The IAM role that is created is called `AWSTransferLoggingAccess`.
 - **Choose an existing role** to choose an existing IAM role from your account. Under **Logging role**, choose the role. This IAM role should include a trust policy with **Service** set to `transfer.amazonaws.com`.

For more information about CloudWatch logging, see [Configure CloudWatch logging role](#).

 **Note**

- You can't view end-user activity in CloudWatch if you don't specify a logging role.
- If you don't want to set up a CloudWatch logging role, select **Choose an existing role**, but don't select a logging role.

- b. For **Cryptographic algorithm options**, choose a security policy that contains the cryptographic algorithms enabled for use by your server.

 **Note**

By default, the `TransferSecurityPolicy-2024-01` security policy is attached to your server unless you choose a different one.

For more information about security policies, see [Security policies for Amazon Transfer Family servers](#).

- c. (Optional: this section is only for migrating users from an existing SFTP-enabled server.) For **Server Host Key**, enter an RSA, ED25519, or ECDSA private key that will be used to identify your server when clients connect to it over SFTP.
- d. (Optional) For **Tags**, for **Key** and **Value**, enter one or more tags as key-value pairs, and then choose **Add tag**.
- e. Choose **Next**.
7. In **Review and create**, review your choices. If you:
- Want to edit any of them, choose **Edit** next to the step.

 **Note**

You will need to review each step after the step that you chose to edit.

- Have no changes, choose **Create server** to create your server. You are taken to the **Servers** page, shown following, where your new server is listed.

It can take a couple of minutes before the status for your new server changes to **Online**. At that point, your server can perform file operations, but you'll need to create a user first. For details on creating users, see [Managing users for server endpoints](#).

Create an internet-facing endpoint for your server

In the following procedure, you create a server endpoint. This endpoint is accessible over the internet only to clients whose source IP addresses are allowed in your VPC's default security group. Additionally, by using Elastic IP addresses to make your endpoint internet-facing, your clients can use the Elastic IP address to allow access to your endpoint in their firewalls.

Note

Only SFTP and FTPS can be used on an internet-facing VPC hosted endpoint.

To create an internet-facing endpoint

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. From the navigation pane, select **Servers**, then choose **Create server**.
3. In **Choose protocols**, select one or more protocols, and then choose **Next**. For more information about protocols, see [Step 2: Create an SFTP-enabled server](#).
4. In **Choose an identity provider**, choose **Service managed** to store user identities and keys in Amazon Transfer Family, and then choose **Next**.

This procedure uses the service-managed option. If you choose **Custom**, you provide an Amazon API Gateway endpoint and an Amazon Identity and Access Management (IAM) role to access the endpoint. By doing so, you can integrate your directory service to authenticate and authorize your users. To learn more about working with custom identity providers, see [Working with custom identity providers](#).

5. In **Choose an endpoint**, do the following:
 - a. For **Endpoint type**, choose the **VPC hosted** endpoint type to host your server's endpoint.

- b. For **Access**, choose **Internet Facing** to make your endpoint accessible to clients over the internet.

Note

When you choose **Internet Facing**, you can choose an existing Elastic IP address in each subnet or subnets. Or you can go to the VPC console (<https://console.amazonaws.cn/vpc/>) to allocate one or more new Elastic IP addresses. These addresses can be owned either by Amazon or by you. You can't associate Elastic IP addresses that are already in use with your endpoint.

- c. (Optional) For **Custom hostname**, choose one of the following:

Note

Customers in Amazon GovCloud (US) need to connect via the Elastic IP address directly, or create a hostname record within Commercial Route 53 that points to their EIP. For more information about using Route 53 for GovCloud endpoints, see [Setting up Amazon Route 53 with your Amazon GovCloud \(US\) resources](#) in the *Amazon GovCloud (US) User Guide*.

- **Amazon Route 53 DNS alias** – if the hostname that you want to use is registered with Route 53. You can then enter the hostname.
- **Other DNS** – if the hostname that you want to use is registered with another DNS provider. You can then enter the hostname.
- **None** – to use the server's endpoint and not use a custom hostname. The server hostname takes the form `server-id.server.transfer.region.amazonaws.com`.

Note


For customers in Amazon GovCloud (US), selecting **None** does not create a hostname in this format.

To learn more about working with custom hostnames, see [Working with custom hostnames](#).

- d. For **VPC**, choose an existing VPC ID or choose **Create a VPC** to create a new VPC.
- e. In the **Availability Zones** section, choose up to three Availability Zones and associated subnets. For **IPv4 Addresses**, choose an **Elastic IP address** for each subnet. This is the IP address that your clients can use to allow access to your endpoint in their firewalls.


Tip: You must use a public subnet for your Availability Zones, or first setup an internet gateway if you want to use a private subnet.

- f. In the **Security Groups** section, choose an existing security group ID or IDs or choose **Create a security group** to create a new security group. For more information about security groups, see [Security groups for your VPC](#) in the *Amazon Virtual Private Cloud User Guide*. To create a security group, see [Creating a security group](#) in the *Amazon Virtual Private Cloud User Guide*.

 **Note**

Your VPC automatically comes with a default security group. If you don't specify a different security group or groups when you launch the server, we associate the default security group with your server.

- For the inbound rules for the security group, you can configure SSH traffic to use port 22, 2222, 22000, or any combination. Port 22 is configured by default. To use port 2222 or port 22000, you add an inbound rule to your security group. For the type, choose **Custom TCP**, then enter either **2222** or **22000** for **Port range**, and for the source, enter the same CIDR range that you have for your SSH port 22 rule.
- For the inbound rules for the security group, configure FTPS traffic to use **Port range 21** for the control channel and **8192-8200** for the data channel.

 **Note**

You can also use port 2223 for clients that require TCP "piggy-back" ACKs, or the ability for the final ack of the TCP 3-way handshake to also contain data. Some client software may be incompatible with port 2223: for example, a client that requires the server to send the SFTP Identification String before the client does.

VPC > Security Groups > sg-...-default > Edit inbound rules

Edit inbound rules Info

Inbound rules control the incoming traffic that's allowed to reach the instance.

Inbound rules Info

Security group rule ID	Type <small>Info</small>	Protocol <small>Info</small>	Port range <small>Info</small>	Source <small>Info</small>
sgr-...	HTTP	TCP	80	Custom 0.0.0.0/0
sgr-...	RDP	TCP	3389	Custom 0.0.0.0/0
sgr-...	HTTPS	TCP	443	Custom 0.0.0.0/0
sgr-...	Custom TCP	TCP	2222	Custom 72.21.196.64/32
sgr-...	SSH	TCP	22	Custom 72.21.196.64/32

- g. (Optional) For **FIPS Enabled**, select the **FIPS Enabled endpoint** check box to ensure the endpoint complies with Federal Information Processing Standards (FIPS).

Note

FIPS-enabled endpoints are only available in North American Amazon Regions. For available Regions, see [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*. For more information about FIPS, see [Federal Information Processing Standard \(FIPS\) 140-2](#).

- h. Choose **Next**.
6. In **Configure additional details**, do the following:
- a. For **CloudWatch logging**, choose one of the following to enable Amazon CloudWatch logging of your user activity:
- **Create a new role** to allow Transfer Family to automatically create the IAM role, as long as you have the right permissions to create a new role. The IAM role that is created is called `AWSTransferLoggingAccess`.
 - **Choose an existing role** to choose an existing IAM role from your account. Under **Logging role**, choose the role. This IAM role should include a trust policy with **Service** set to `transfer.amazonaws.com`.

For more information about CloudWatch logging, see [Configure CloudWatch logging role](#).

Note

- You can't view end-user activity in CloudWatch if you don't specify a logging role.
- If you don't want to set up a CloudWatch logging role, select **Choose an existing role**, but don't select a logging role.

- b. For **Cryptographic algorithm options**, choose a security policy that contains the cryptographic algorithms enabled for use by your server.

Note

By default, the `TransferSecurityPolicy-2024-01` security policy is attached to your server unless you choose a different one.

For more information about security policies, see [Security policies for Amazon Transfer Family servers](#).

- c. (Optional: this section is only for migrating users from an existing SFTP-enabled server.) For **Server Host Key**, enter an RSA, ED25519, or ECDSA private key that will be used to identify your server when clients connect to it over SFTP.
- d. (Optional) For **Tags**, for **Key** and **Value**, enter one or more tags as key-value pairs, and then choose **Add tag**.
- e. Choose **Next**.
- f. (Optional) For **Managed workflows**, choose workflow IDs (and a corresponding role) that Transfer Family should assume when executing the workflow. You can choose one workflow to execute upon a complete upload, and another to execute upon a partial upload. To learn more about processing your files by using managed workflows, see [Amazon Transfer Family managed workflows](#).

The screenshot shows the 'Managed workflows' section in the Amazon Transfer Family console. It is divided into three main sections:

- Workflow for complete file uploads:** Includes a dropdown menu with a placeholder 'w-...', a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Workflow for partial file uploads:** Includes a dropdown menu with a placeholder 'w-...', a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Managed workflows execution role:** Includes a dropdown menu with a placeholder and a refresh button.

7. In **Review and create**, review your choices. If you:

- Want to edit any of them, choose **Edit** next to the step.

Note

You will need to review each step after the step that you chose to edit.

- Have no changes, choose **Create server** to create your server. You are taken to the **Servers** page, shown following, where your new server is listed.

You can choose the server ID to see the detailed settings of the server that you just created. After the column **Public IPv4 address** has been populated, the Elastic IP addresses that you provided are successfully associated with your server's endpoint.

Note

When your server in a VPC is online, only the subnets can be modified and only through the [UpdateServer](#) API. You must [stop the server](#) to add or change the server endpoint's Elastic IP addresses.

Change the endpoint type for your server

If you have an existing server that is accessible over the internet (that is, has a public endpoint type), you can change its endpoint to a VPC endpoint.

Note

If you have an existing server in a VPC displayed as VPC_ENDPOINT, we recommend that you modify it to the new VPC endpoint type. With this new endpoint type, you no longer need to use a Network Load Balancer (NLB) to associate Elastic IP addresses with your server's endpoint. Also, you can use VPC security groups to restrict access to your server's endpoint. However, you can continue to use the VPC_ENDPOINT endpoint type as needed.

The following procedure assumes that you have a server that uses either the current public endpoint type or the older VPC_ENDPOINT type.

To change the endpoint type for your server

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the navigation pane, choose **Servers**.
3. Select the check box of the server that you want to change the endpoint type for.

Important

You must stop the server before you can change its endpoint.


4. For **Actions**, choose **Stop**.
5. In the confirmation dialog box that appears, choose **Stop** to confirm that you want to stop the server.

Note

Before proceeding to the next step, in **Endpoint details**, wait for the **Status** of the server to change to **Offline**; this can take a couple of minutes. You might have to choose **Refresh** on the **Servers** page to see the status change. You won't be able to make any edits until the server is **Offline**.

6. In **Endpoint details**, choose **Edit**.
7. In **Edit endpoint configuration**, do the following:
 - a. For **Edit endpoint type**, choose **VPC hosted**.

- b. For **Access**, choose one of the following:
- **Internal** to make your endpoint only accessible to clients using the endpoint's private IP addresses.
 - **Internet Facing** to make your endpoint accessible to clients over the public internet.

 **Note**

When you choose **Internet Facing**, you can choose an existing Elastic IP address in each subnet or subnets. Or, you can go to the VPC console (<https://console.amazonaws.cn/vpc/>) to allocate one or more new Elastic IP addresses. These addresses can be owned either by Amazon or by you. You can't associate Elastic IP addresses that are already in use with your endpoint.

- c. (Optional for internet facing access only) For **Custom hostname**, choose one of the following:
- **Amazon Route 53 DNS alias** – if the hostname that you want to use is registered with Route 53. You can then enter the hostname.
 - **Other DNS** – if the hostname that you want to use is registered with another DNS provider. You can then enter the hostname.
 - **None** – to use the server's endpoint and not use a custom hostname. The server hostname takes the form `serverId.server.transfer.regionId.amazonaws.com`.

To learn more about working with custom hostnames, see [Working with custom hostnames](#).


- d. For **VPC**, choose an existing VPC ID, or choose **Create a VPC** to create a new VPC.
- e. In the **Availability Zones** section, select up to three Availability Zones and associated subnets. If **Internet Facing** is chosen, also choose an Elastic IP address for each subnet.

 **Note**

If you want the maximum of three Availability Zones, but there are not enough available, create them in the VPC console (<https://console.amazonaws.cn/vpc/>).

If you modify the subnets or Elastic IP addresses, the server takes a few minutes to update. You can't save your changes until the server update is complete.

- f. Choose **Save**.
8. For **Actions**, choose **Start** and wait for the status of the server to change to **Online**; this can take a couple of minutes.

 **Note**

If you changed a public endpoint type to a VPC endpoint type, notice that **Endpoint type** for your server has changed to **VPC**.

The default security group is attached to the endpoint. To change or add additional security groups, see [Creating Security Groups](#).

Discontinuing the use of VPC_ENDPOINT

Amazon Transfer Family is discontinuing the ability to create servers with `EndpointType=VPC_ENDPOINT` for new Amazon accounts. As of May 19, 2021, Amazon accounts that don't own Amazon Transfer Family servers with an endpoint type of `VPC_ENDPOINT` will not be able to create new servers with `EndpointType=VPC_ENDPOINT`. If you already own servers that use the `VPC_ENDPOINT` endpoint type, we recommend that you start using `EndpointType=VPC` as soon as possible. For details, see [Update your Amazon Transfer Family server endpoint type from VPC_ENDPOINT to VPC](#).

We launched the new VPC endpoint type earlier in 2020. For more information, see [Amazon Transfer Family for SFTP supports VPC Security Groups and Elastic IP addresses](#). This new endpoint is more feature rich and cost effective and there are no PrivateLink charges. For more information, see [Amazon PrivateLink pricing](#).


This endpoint type is functionally equivalent to the previous endpoint type (`VPC_ENDPOINT`). You can attach Elastic IP addresses directly to the endpoint to make it internet facing and use security groups for source IP filtering. For more information, see the [Use IP allow listing to secure your Amazon Transfer Family for SFTP servers](#) blog post.

You can also host this endpoint in a shared VPC environment. For more information, see [Amazon Transfer Family now supports shared services VPC environments](#).

In addition to SFTP, you can use the VPC EndpointType to enable FTPS and FTP. We don't plan to add these features and FTPS/FTP support to EndpointType=VPC_ENDPOINT. We have also removed this endpoint type as an option from the Amazon Transfer Family console.

You can change the endpoint type for your server using the Transfer Family console, Amazon CLI, API, SDKs, or Amazon CloudFormation. To change your server's endpoint type, see [Updating the Amazon Transfer Family server endpoint type from VPC_ENDPOINT to VPC](#).

If you have any questions, contact Amazon Web Services Support or your Amazon account team.

 **Note**

We do not plan to add these features and FTPS or FTP support to EndpointType=VPC_ENDPOINT. We are no longer offering it as an option on the Amazon Transfer Family Console.

If you have additional questions, you can contact us through Amazon Web Services Support or your account team.

Updating the Amazon Transfer Family server endpoint type from VPC_ENDPOINT to VPC

You can use the Amazon Web Services Management Console, Amazon CloudFormation, or the Transfer Family API to update a server's EndpointType from VPC_ENDPOINT to VPC. Detailed procedures and examples for using each of these methods to update a server endpoint type are provided in the following sections. If you have servers in multiple Amazon regions and in multiple Amazon accounts, you can use the example script provided in the following section, with modifications, to identify servers using the VPC_ENDPOINT type that you will need to update.

Topics

- [Identifying servers using the VPC_ENDPOINT endpoint type](#)
- [Updating the server endpoint type using the Amazon Web Services Management Console](#)
- [Updating the server endpoint type using Amazon CloudFormation](#)
- [Updating the server EndpointType using the API](#)

Identifying servers using the VPC_ENDPOINT endpoint type

You can identify which servers are using the VPC_ENDPOINT using the Amazon Web Services Management Console.

To identify servers using the VPC_ENDPOINT endpoint type using the console

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. Choose **Servers** in the navigation pane to display the list of servers in your account in that region.
3. Sort the list of servers by the **Endpoint type** to see all servers using VPC_ENDPOINT.

To identify servers using VPC_ENDPOINT across multiple Amazon Regions and accounts

If you have servers in multiple Amazon regions and in multiple Amazon accounts, you can use the following example script, with modifications, to identify servers using the VPC_ENDPOINT endpoint type. The example script uses the Amazon EC2 [DescribeRegions](#) and the Transfer Family [ListServers](#) API operations. If you have many Amazon accounts, you could loop through your accounts using an IAM Role with read only auditor access if you authenticate using session profiles to your identity provider.

1. Following is a simple example.

```
import boto3

profile = input("Enter the name of the Amazon account you'll be working in: ")
session = boto3.Session(profile_name=profile)

ec2 = session.client("ec2")

regions = ec2.describe_regions()

for region in regions['Regions']:
    region_name = region['RegionName']
    if region_name=='ap-northeast-3': #https://github.com/boto/boto3/issues/1943
        continue
    transfer = session.client("transfer", region_name=region_name)
    servers = transfer.list_servers()
    for server in servers['Servers']:
        if server['EndpointType']=='VPC_ENDPOINT':
```

```
print(server['ServerId'], region_name)
```

2. After you have the list of the servers to update, you can use one of the methods described in the following sections to update the `EndpointType` to VPC.

Updating the server endpoint type using the Amazon Web Services Management Console

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the navigation pane, choose **Servers**.
3. Select the check box of the server that you want to change the endpoint type for.

Important

You must stop the server before you can change its endpoint.

4. For **Actions**, choose **Stop**.
5. In the confirmation dialog box that appears, choose **Stop** to confirm that you want to stop the server.

Note

Before proceeding to the next step, wait for the **Status** of the server to change to **Offline**; this can take a couple of minutes. You might have to choose **Refresh** on the **Servers** page to see the status change.

6. After the status changes to **Offline**, choose the server to display the server details page.
7. In the **Endpoint details** section, choose **Edit**.
8. Choose **VPC hosted** for the **Endpoint type**.
9. Choose **Save**.
10. For **Actions**, choose **Start** and wait for the status of the server to change to **Online**; this can take a couple of minutes.

Updating the server endpoint type using Amazon CloudFormation

This section describes how to use Amazon CloudFormation to update a server's `EndpointType` to VPC. Use this procedure for Transfer Family servers that you have deployed using Amazon

CloudFormation. In this example, the original Amazon CloudFormation template used to deploy the Transfer Family server is shown as follows:

```
AmazonTemplateFormatVersion: '2010-09-09'
Description: 'Create Amazon Transfer Server with VPC_ENDPOINT endpoint type'
Parameters:
  SecurityGroupId:
    Type: Amazon::EC2::SecurityGroup::Id
  SubnetIds:
    Type: List<Amazon::EC2::Subnet::Id>
  VpcId:
    Type: Amazon::EC2::VPC::Id
Resources:
  TransferServer:
    Type: Amazon::Transfer::Server
    Properties:
      Domain: S3
      EndpointDetails:
        VpcEndpointId: !Ref VPCEndpoint
        EndpointType: VPC_ENDPOINT
        IdentityProviderType: SERVICE_MANAGED
      Protocols:
        - SFTP
  VPCEndpoint:
    Type: Amazon::EC2::VPCEndpoint
    Properties:
      ServiceName: com.amazonaws.us-east-1.transfer.server
      SecurityGroupIds:
        - !Ref SecurityGroupId
      SubnetIds:
        - !Select [0, !Ref SubnetIds]
        - !Select [1, !Ref SubnetIds]
        - !Select [2, !Ref SubnetIds]
      VpcEndpointType: Interface
      VpcId: !Ref VpcId
```

The template is updated with the following changes:

- The `EndpointType` was changed to `VPC`.
- The `AWS::EC2::VPCEndpoint` resource is removed.
- The `SecurityGroupId`, `SubnetIds`, and `VpcId` were moved to the `EndpointDetails` section of the `AWS::Transfer::Server` resource,

- The `VpcEndpointId` property of `EndpointDetails` was removed.

The updated template looks as follows:

```
AmazonTemplateFormatVersion: '2010-09-09'
Description: 'Create Amazon Transfer Server with VPC endpoint type'
Parameters:
  SecurityGroupId:
    Type: Amazon::EC2::SecurityGroup::Id
  SubnetIds:
    Type: List<Amazon::EC2::Subnet::Id>
  VpcId:
    Type: Amazon::EC2::VPC::Id
Resources:
  TransferServer:
    Type: Amazon::Transfer::Server
    Properties:
      Domain: S3
      EndpointDetails:
        SecurityGroupIds:
          - !Ref SecurityGroupId
        SubnetIds:
          - !Select [0, !Ref SubnetIds]
          - !Select [1, !Ref SubnetIds]
          - !Select [2, !Ref SubnetIds]
        VpcId: !Ref VpcId
      EndpointType: VPC
      IdentityProviderType: SERVICE_MANAGED
      Protocols:
        - SFTP
```

To update the endpoint type of Transfer Family servers deployed using Amazon CloudFormation

1. Stop the server that you want to update using the following steps.
 - a. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
 - b. In the navigation pane, choose **Servers**.
 - c. Select the check box of the server that you want to change the endpoint type for.

⚠ Important

You must stop the server before you can change its endpoint.

- d. For **Actions**, choose **Stop**.
- e. In the confirmation dialog box that appears, choose **Stop** to confirm that you want to stop the server.

ℹ Note

Before proceeding to the next step, wait for the **Status** of the server to change to **Offline**; this can take a couple of minutes. You might have to choose **Refresh** on the **Servers** page to see the status change.

2. Update the CloudFormation stack

- a. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
- b. Choose the stack used to create the Transfer Family server.
- c. Choose **Update**.
- d. Choose **Replace current template**
- e. Upload the new template. CloudFormation Change Sets help you understand how template changes will affect running resources before you implement them. In this example, the Transfer server resource will be modified, and the VPCEndpoint resource will be removed. The VPC endpoint type server creates a VPC Endpoint on your behalf, replacing the original VPCEndpoint resource.

After uploading the new template, the change set will look similar to the following:

Change set preview

Changes (2)

Search changes

Action	Logical ID	Physical ID	Resource type	Replacement
Modify	TransferServer	east-1:364810874344:server/s-6a7d04e12d494ec98	AWS::Transfer::Server	Conditional
Remove	VPCEndpoint	vpce-04e685f8702849573	AWS::EC2::VPCEndpoint	-

- f. Update the stack.
3. Once the stack update is complete, navigate to the Transfer Family management console at <https://console.amazonaws.cn/transfer/>.
4. Restart the server. Choose the server you updated in Amazon CloudFormation, and then choose **Start** from the **Actions** menu.

Updating the server EndpointType using the API

You can use the [describe-server](#) Amazon CLI command, or the [UpdateServer](#) API command. The following example script stops the Transfer Family server, updates the EndpointType, removes the VPC_ENDPOINT, and starts the server.

```
import boto3
import time

profile = input("Enter the name of the Amazon account you'll be working in: ")
region_name = input("Enter the Amazon Region you're working in: ")
server_id = input("Enter the Amazon Transfer Server Id: ")

session = boto3.Session(profile_name=profile)

ec2 = session.client("ec2", region_name=region_name)
transfer = session.client("transfer", region_name=region_name)
```



```
group_ids=[]

transfer_description = transfer.describe_server(ServerId=server_id)
if transfer_description['Server']['EndpointType']=='VPC_ENDPOINT':
    transfer_vpc_endpoint = transfer_description['Server']['EndpointDetails']
['VpcEndpointId']
    transfer_vpc_endpoint_descriptions =
ec2.describe_vpc_endpoints(VpcEndpointIds=[transfer_vpc_endpoint])
    for transfer_vpc_endpoint_description in
transfer_vpc_endpoint_descriptions['VpcEndpoints']:
        subnet_ids=transfer_vpc_endpoint_description['SubnetIds']
        group_id_list=transfer_vpc_endpoint_description['Groups']
        vpc_id=transfer_vpc_endpoint_description['VpcId']
        for group_id in group_id_list:
            group_ids.append(group_id['GroupId'])
    if transfer_description['Server']['State']=='ONLINE':
        transfer_stop = transfer.stop_server(ServerId=server_id)
        print(transfer_stop)
        time.sleep(300) #safe
        transfer_update =
transfer.update_server(ServerId=server_id,EndpointType='VPC',EndpointDetails={'SecurityGroupIds':
        print(transfer_update)
        time.sleep(10)
        transfer_start = transfer.start_server(ServerId=server_id)
        print(transfer_start)
        delete_vpc_endpoint =
ec2.delete_vpc_endpoints(VpcEndpointIds=[transfer_vpc_endpoint])
```

Working with custom hostnames

Your *server host name* is the hostname that your users enter in their clients when they connect to your server. You can use a custom domain that you have registered for your server hostname when you work with Amazon Transfer Family. For example, you might use a custom hostname like `mysftpserver.mysubdomain.domain.com`.

To redirect traffic from your registered custom domain to your server endpoint, you can use Amazon Route 53 or any Domain Name System (DNS) provider. Route 53 is the DNS service that Amazon Transfer Family natively supports.

Topics

- [Use Amazon Route 53 as your DNS provider](#)

- [Use other DNS providers](#)
- [Custom hostnames for non-console created servers](#)

On the console, you can choose one of these options for setting up a custom hostname:

- **Amazon Route 53 DNS alias** – if the hostname that you want to use is registered with Route 53. You can then enter the hostname.
- **Other DNS** – if the hostname that you want to use is registered with another DNS provider. You can then enter the hostname.
- **None** – to use the server's endpoint and not use a custom hostname.

You set this option when you create a new server or edit the configuration of an existing server. For more information about creating a new server, see [Step 2: Create an SFTP-enabled server](#). For more information about editing the configuration of an existing server, see [Edit server details](#).

For more details about using your own domain for the server hostname and how Amazon Transfer Family uses Route 53, see the following sections.

Use Amazon Route 53 as your DNS provider

When you create a server, you can use Amazon Route 53 as your DNS provider. Before you use a domain with Route 53, you register the domain. For more information, see [How Domain registration works](#) in the *Amazon Route 53 Developer Guide*.

When you use Route 53 to provide DNS routing to your server, Amazon Transfer Family uses the custom hostname that you entered to extract its hosted zone. When Amazon Transfer Family extracts a hosted zone, three things can happen:

1. If you're new to Route 53 and don't have a hosted zone, Amazon Transfer Family adds a new hosted zone and a CNAME record. The value of this CNAME record is the endpoint hostname for your server. A *CNAME* is an alternate domain name.
2. If you have a hosted zone in Route 53 without any CNAME records, Amazon Transfer Family adds a CNAME record to the hosted zone.
3. If the service detects that a CNAME record already exists in the hosted zone, you see an error indicating that a CNAME record already exists. In this case, change the value of the CNAME record to the hostname of your server.

For more information about hosted zones in Route 53, see [Hosted zone](#) in the *Amazon Route 53 Developer Guide*.

Use other DNS providers

When you create a server, you can also use DNS providers other than Amazon Route 53. If you use an alternate DNS provider, make sure that traffic from your domain is directed to your server endpoint.

To do so, set your domain to the endpoint hostname for the server. An endpoint hostname looks like this in the console:

```
serverid.server.transfer.region.amazonaws.com
```

Note

If your server has a VPC endpoint, then the format for the hostname is different from the one described above. To find your VPC endpoint, select the VPC on the server's details page, then select the **VPC endpoint ID** on the VPC dashboard. The endpoint is the first DNS name of those listed.

Custom hostnames for non-console created servers

When you create a server using Amazon Cloud Development Kit (Amazon CDK), Amazon CloudFormation, or through the CLI, you must add a tag if you want that server to have a custom hostname. When you create a Transfer Family server by using the console, the tagging is done automatically.

Note

You also need to create a DNS record to redirect traffic from your domain to your server endpoint. For details, see [Working with records](#) in the *Amazon Route 53 Developer Guide*.

Use the following keys for your custom hostname:

- Add `transfer:customHostname` to display the custom hostname in the console.
- If you are using Route 53 as your DNS provider, add `transfer:route53HostedZoneId`. This tag links the custom hostname to your Route 53 Hosted Zone ID.

To add the custom hostname, issue the following CLI command.

```
aws transfer tag-resource --arn arn:aws-cn:transfer:region:Amazon Web Services account:server/server-ID --tags Key=transfer:customHostname,Value="custom-host-name"
```

For example:

```
aws transfer tag-resource --arn arn:aws-cn:transfer:us-east-1:111122223333:server/s-1234567890abcdef0 --tags Key=transfer:customHostname,Value="abc.example.com"
```

If you are using Route 53, issue the following command to link your custom hostname to your Route 53 Hosted Zone ID.

```
aws transfer tag-resource --arn server-ARN:server/server-ID --tags Key=transfer:route53HostedZoneId,Value=HOSTED-ZONE-ID
```

For example:

```
aws transfer tag-resource --arn arn:aws-cn:transfer:us-east-1:111122223333:server/s-1234567890abcdef0 --tags Key=transfer:route53HostedZoneId,Value=ABCDE1111222233334444
```

Assuming the sample values from the previous command, run the following command to view your tags:

```
aws transfer list-tags-for-resource --arn arn:aws-cn:transfer:us-east-1:111122223333:server/s-1234567890abcdef0
```

```
"Tags": [  
  {  
    "Key": "transfer:route53HostedZoneId",  
    "Value": "/hostedzone/ABCDE1111222233334444"  
  },  
  {  
    "Key": "transfer:customHostname",  
    "Value": "abc.example.com"  
  }  
]
```

Note

Your public, hosted zones and their IDs are available on Amazon Route 53. Sign in to the Amazon Web Services Management Console and open the Route 53 console at <https://console.amazonaws.cn/route53/>.

Transferring files over a server endpoint using a client

You transfer files over the Amazon Transfer Family service by specifying the transfer operation in a client. Amazon Transfer Family supports the following clients:

- We support version 3 of the SFTP protocol.
- OpenSSH (macOS and Linux)

Note

This client works only with servers that are enabled for Secure Shell (SSH) File Transfer Protocol (SFTP).

- WinSCP (Microsoft Windows only)
- Cyberduck (Windows, macOS, and Linux)
- FileZilla (Windows, macOS, and Linux)

The following limitations apply to every client:

- The SCP protocol is not supported, as it is considered insecure. You can use the OpenSSH `scp` command as described in [Using the scp command](#).
- The maximum number of concurrent, multiplexed, SFTP sessions per connection is 10.
- There are two timeout values for SFTP/FTP/FTPS connections. For idle connections, the timeout value is 1800 seconds (30 minutes). If there is no activity after the period has passed the client may be disconnected. There is also a 300 seconds (5 minutes) timeout when a client is completely unresponsive.
- Amazon S3 and Amazon EFS (due to the NFSv4 protocol) require filenames to be in UTF-8 encoding. Using different encoding can lead to unexpected results. For Amazon S3, see [Object key naming guidelines](#).

- For File Transfer Protocol over SSL (FTPS), only Explicit mode is supported. Implicit mode is not supported.
- For File Transfer Protocol (FTP) and FTPS, only Passive mode is supported.
- For FTP and FTPS, only STREAM mode is supported.
- For FTP and FTPS, only Image/Binary mode is supported.
- For FTP and FTPS, TLS - PROT C (unprotected) TLS for the data connection is the default but PROT C is not supported in the Amazon Transfer Family FTPS protocol. So for FTPS, you need to issue PROT P for your data operation to be accepted.
- If you are using Amazon S3 for your server's storage, and if your client contains an option to use multiple connections for a single transfer, make sure to disable the option. Otherwise, large file uploads can fail in unpredictable ways. Note that if you are using Amazon EFS as your storage backend, EFS *does* support multiple connections for a single transfer.

The following is a list of available commands for FTP and FTPS:

Available commands					
ABOR	FEAT	MLST	PASS	RETR	STOR
AUTH	LANG	MKD	PASV	RMD	STOU
CDUP	LIST	MODE	PBSZ	RNFR	STRU
CWD	MDTM	NLST	PROT	RNTO	SYST
DELE	MFMT	NOOP	PWD	SIZE	TYPE
EPSV	MLSD	OPTS	QUIT	STAT	USER

Note

APPE is not supported.

For SFTP, the following operations are currently not supported for users that are using the logical home directory on servers that are using Amazon Elastic File System (Amazon EFS).

Unsupported SFTP commands

SSH_FXP_READLINK	SSH_FXP_SYMLINK	SSH_FXP_STAT when the requested file is a symlink	SSH_FXP_REALPATH when the requested path contains any symlink components
------------------	-----------------	---	--

Generate public-private key pair

Before you can transfer a file, you must have a public-private key pair available. If you have not previously generated a key pair, see [Generate SSH keys for service-managed users](#).

Topics

- [Available SFTP/FTPS/FTP Commands](#)
- [Find your Amazon VPC endpoint](#)
- [Avoid setstat errors](#)
- [Use OpenSSH](#)
- [Use WinSCP](#)
- [Use Cyberduck](#)
- [Use FileZilla](#)
- [Use a Perl client](#)
- [Use LFTP](#)
- [Post upload processing](#)
- [SFTP messages](#)

Available SFTP/FTPS/FTP Commands

The following table describes the available commands for Amazon Transfer Family, for the SFTP, FTPS, and FTP protocols.

Note

The table mentions *files* and *directories* for Amazon S3, which only supports buckets and objects: there is no hierarchy. However, you can use prefixes in object key names to imply a

hierarchy and organize your data in a way similar to folders. This behavior is described in [Working with object metadata](#) in the *Amazon Simple Storage Service User Guide*.

SFTP/FTPS/FTP Commands

Command	Amazon S3	Amazon EFS
cd	Supported	Supported
chgrp	Not supported	Supported (root or owner only)
chmod	Not supported	Supported (root only)
chmtime	Not supported	Supported
chown	Not supported	Supported (root only)
get	Supported	Supported (including resolving symbolic links)
ln -s	Not supported	Supported
ls/dir	Supported	Supported
mkdir	Supported	Supported
put	Supported	Supported
pwd	Supported	Supported
rename	Supported for files only	Supported

Note

Renaming that would overwrite an existing file or directory is not supported.

Command	Amazon S3	Amazon EFS
rm	Supported	Supported
rmdir	Supported (empty directories only)	Supported
version	Supported	Supported

Find your Amazon VPC endpoint

If the endpoint type for your Transfer Family server is VPC, identifying the endpoint to use for transferring files is not straightforward. In this case, use the following procedure to find your Amazon VPC endpoint.

To find your Amazon VPC endpoint

1. Navigate to your server's details page.
2. In the **Endpoint details** pane, select the **VPC**.

The screenshot shows the 'Endpoint details' pane in the Amazon VPC console. The pane has an 'Edit' button in the top right corner. The details are as follows:

- Status:** Online (indicated by a green checkmark icon)
- Endpoint type:** VPC (with a dropdown menu showing 'vpce-' followed by a blue bar and a copy icon, highlighted with a red box)
- VPC:** vpc- (followed by a greyed-out ID)
- FIPS Enabled:** No
- Custom hostname:** -
- Endpoint:** -
- Access:** Info (with a blue link icon)
- Internal:** Internal

3. In the Amazon VPC dashboard, select the **VPC endpoint ID**.
4. In the list of **DNS names**, your server endpoint is the first one listed.

The screenshot shows the AWS Management Console interface for a VPC endpoint. The breadcrumb navigation is 'VPC > Endpoints > vpce-XXXXXXXXXXXX'. The endpoint name is 'vpce-XXXXXXXXXXXX'. The 'Details' section is divided into four columns:

- Endpoint ID:** vpce-XXXXXXXXXXXX
- VPC ID:** vpc-5f5e1d1c (no-name-specified)
- DNS record IP type:** ipv4
- Status:** Available (with a green checkmark icon)
- Status message:** -
- IP address type:** ipv4
- Creation time:** Monday, April 4, 2022 at 10:51:31 EDT
- Service name:** com.amazonaws.us-east-2.transfer.server.c-0002
- DNS names:** A list of DNS names, with the first one 'vpce-XXXXXXXXXXXX' highlighted by a red box. Other names are partially visible as 'XXXXXXXXXXXX.us-east-2.' and 'XXXXXXXXXXXX.us-east-'.
- Endpoint type:** Interface
- Private DNS names enabled:** No

Avoid setstat errors

Some SFTP file transfer clients can attempt to change the attributes of remote files, including timestamp and permissions, using commands, such as SETSTAT when uploading the file. However, these commands are not compatible with object storage systems, such as Amazon S3. Due to this incompatibility, file uploads from these clients can result in errors even when the file is otherwise successfully uploaded.

- When you call the `CreateServer` or `UpdateServer` API, use the `ProtocolDetails` option `SetStatOption` to ignore the error that is generated when the client attempts to use SETSTAT on a file you are uploading to an S3 bucket.
- Set the value to `ENABLE_NO_OP` to have the Transfer Family server ignore the SETSTAT command, and upload files without needing to make any changes to your SFTP client.
- Note that while the `SetStatOption` `ENABLE_NO_OP` setting ignores the error, it *does* generate a log entry in CloudWatch Logs, so you can determine when the client is making a SETSTAT call.

For the API details for this option, see [ProtocolDetails](#).

Use OpenSSH

This section contains instructions to transfer files from the command line using OpenSSH.

Note

This client works only with an SFTP-enabled server.

Topics

- [Using OpenSSH](#)
- [Using the scp command](#)

Using OpenSSH

To transfer files over Amazon Transfer Family using the OpenSSH command line utility

1. On Linux, macOS, or Windows, open a command terminal.
2. At the prompt, enter the following command:

```
sftp -i transfer-key sftp_user@service_endpoint
```

In the preceding command, *sftp_user* is the username and *transfer-key* is the SSH private key. Here, *service_endpoint* is the server's endpoint as shown in the Amazon Transfer Family console for the selected server.

Note

This command uses settings that are in the default `ssh_config` file. Unless you have previously edited this file, SFTP uses port 22. You can specify a different port (for example 2222) by adding a `-P` flag to the command, as follows.

```
sftp -P 2222 -i transfer-key sftp_user@service_endpoint
```

Alternatively, if you always want to use port 2222 or port 22000, you can update your default port in your `ssh_config` file.

An `sftp` prompt should appear.

3. (Optional) To view the user's home directory, enter the following command at the `sftp` prompt:

```
pwd
```

4. To upload a file from your file system to the Transfer Family server, use the `put` command. For example, to upload `hello.txt` (assuming that file is in your current directory on your file system), run the following command at the `sftp` prompt:

```
put hello.txt
```

A message similar to the following appears, indicating that the file transfer is in progress, or complete.

```
Uploading hello.txt to /amzn-s3-demo-bucket/home/sftp_user/hello.txt
```

```
hello.txt 100% 127 0.1KB/s 00:00
```

Note

After your server is created, it can take a few minutes for the server endpoint hostname to be resolvable by the DNS service in your environment.

Using the `scp` command

Transfer Family doesn't support the SCP protocol. However, you can use the OpenSSH `scp` command if you need this functionality.

The recommendation for using SCP over SFTP is to use OpenSSH version 9.0 or later. In OpenSSH version 9 and later, the `scp` command defaults to using the SFTP protocol for file transfers instead of the legacy SCP protocol.

Important

Ensure that your Transfer Family server has been configured to use S3 optimized directory access.

Use WinSCP

Use the instructions that follow to transfer files from the command line using WinSCP.

Note

If you are using WinSCP 5.19, you can directly connect to Amazon S3 using your Amazon credentials and upload/download files. For more details, see [Connecting to Amazon S3 service](#).

To transfer files over Amazon Transfer Family using WinSCP

1. Open the WinSCP client.
2. In the **Login** dialog box, for **File protocol**, choose a protocol: **SFTP** or **FTP**.

If you chose FTP, for **Encryption**, choose one of the following:

- **No encryption** for FTP
- **TLS/SSL Explicit encryption** for FTPS

3. For **Host name**, enter your server endpoint. The server endpoint is located on the **Server details** page. For more information, see [View SFTP, FTPS, and FTP server details](#).

If your server uses a VPC endpoint, see [Find your Amazon VPC endpoint](#).

4. For **Port number**, enter the following:

- **22** for SFTP
- **21** for FTP/FTPS

5. For **User name**, enter the name for the user that you created for your specific identity provider.

Tip: The username should be one of the users you created or configured for your identity provider. Amazon Transfer Family provides the following identity providers:

- [Working with service-managed users](#)
- [Using Amazon Directory Service for Microsoft Active Directory](#)
- [Working with custom identity providers](#)

6. Choose **Advanced** to open the **Advanced Site Settings** dialog box. In the **SSH** section, choose **Authentication**.

7. For **Private key file**, browse for and choose the SSH private key file from your file system.

If WinSCP offers to convert your SSH private key to the PPK format, choose **OK**.

8. Choose **OK** to return to the **Login** dialog box, and then choose **Save**.
9. In the **Save session as site** dialog box, choose **OK** to complete your connection setup.
10. In the **Login** dialog box, choose **Tools**, and then choose **Preferences**.
11. In the **Preferences** dialog box, for **Transfer**, choose **Endurance**.

For the **Enable transfer resume/transfer to temporary filename for** option, choose **Disable**.

Important

If you leave this option enabled, it increases upload costs, substantially decreasing upload performance. It also can lead to failures of large file uploads.

12. For **Transfer**, choose **Background**, and clear the **Use multiple connections for single transfer** check box.

Tip: If you leave this option selected, large file uploads can fail in unpredictable ways. For example, orphaned multipart uploads that incur Amazon S3 charges can be created. Silent data corruption can also occur.

13. Perform your file transfer.

You can use drag-and-drop methods to copy files between the target and source windows. You can use toolbar icons to upload, download, delete, edit, or modify the properties of files in WinSCP.

Note

This note does not apply if you are using Amazon EFS for storage. Commands that attempt to change attributes of remote files, including timestamps, are not compatible with object storage systems such as Amazon S3. Therefore, if you are using Amazon S3 for storage, be sure to disable WinSCP timestamp settings (or use the `SetStatOption` as described in [Avoid setstat errors](#)) before you perform file transfers. To do so, in the **WinSCP Transfer settings** dialog box, disable the **Set permissions** upload option and the **Preserve timestamp** common option.

Use Cyberduck

Use the instructions that follow to transfer files from the command line using Cyberduck.

To transfer files over Amazon Transfer Family using Cyberduck

1. Open the [Cyberduck](#) client.
2. Choose **Open Connection**.
3. In the **Open Connection** dialog box, choose a protocol: **SFTP (SSH File Transfer Protocol)**, **FTP-SSL (Explicit AUTH TLS)**, or **FTP (File Transfer Protocol)**.
4. For **Server**, enter your server endpoint. The server endpoint is located on the **Server details** page. For more information, see [View SFTP, FTPS, and FTP server details](#).

If your server uses a VPC endpoint, see [Find your Amazon VPC endpoint](#).

5. For **Port number**, enter the following:
 - **22** for SFTP
 - **21** for FTP/FTPS
6. For **Username**, enter the name for the user that you created in [Managing users for server endpoints](#).
7. If SFTP is selected, for **SSH Private Key**, choose or enter the SSH private key.
8. Choose **Connect**.
9. Perform your file transfer.

Depending on where your files are, do one of the following:

- In your local directory (the source), choose the files that you want to transfer, and drag and drop them into the Amazon S3 directory (the target).
- In the Amazon S3 directory (the source), choose the files that you want to transfer, and drag and drop them into your local directory (the target).

Use FileZilla

Use the instructions that follow to transfer files using FileZilla.

To set up FileZilla for a file transfer

1. Open the FileZilla client.
2. Choose **File**, and then choose **Site Manager**.
3. In the **Site Manager** dialog box, choose **New site**.
4. On the **General** tab, for **Protocol**, choose a protocol: **SFTP** or **FTP**.

If you chose FTP, for **Encryption**, choose one of the following:

- **Only use plain FTP (insecure)** – for FTP
 - **Use explicit FTP over TLS if available** – for FTPS
5. For **Host name**, enter the protocol that you are using, followed by your server endpoint. The server endpoint is located on the **Server details** page. For more information, see [View SFTP, FTPS, and FTP server details](#).
 - If you are using SFTP, enter: `sftp://hostname`
 - If you are using FTPS, enter: `ftps://hostname`

Make sure to replace *hostname* with your actual server endpoint.

If your server uses a VPC endpoint, see [Find your Amazon VPC endpoint](#).

6. For **Port number**, enter the following:
 - **22** for SFTP
 - **21** for FTP/FTPS
7. If SFTP is selected, for **Logon Type**, choose **Key file**.

For **Key file**, choose or enter the SSH private key.

8. For **User**, enter the name for the user that you created in [Managing users for server endpoints](#).
9. Choose **Connect**.
10. Perform your file transfer.

Note

If you interrupt a file transfer in progress, Amazon Transfer Family might write a partial object in your Amazon S3 bucket. If you interrupt an upload, check that the file size in the Amazon S3 bucket matches the file size of the source object before continuing.

Use a Perl client

If you use the `Net::SFTP::Foreign` perl client, you must set the `queue_size` to 1. For example:

```
my $sftp = Net::SFTP::Foreign->new('user@s-12345.server.transfer.us-east-2.amazonaws.com', queue_size => 1);
```

Note

This workaround is needed for revisions of `Net::SFTP::Foreign` prior to [1.92.02](#).

Use LFTP

LFTP is a free FTP client that allows users to perform file transfers via the command-line interface from most Linux machines.

For large file downloads, LFTP has a known issue with out of order packets, causing the file transfer to fail.

Post upload processing


You can view post upload processing information including Amazon S3 object metadata and event notifications.

Topics

- [Amazon S3 object metadata](#)
- [Amazon S3 event notifications](#)

Amazon S3 object metadata

As a part of your object's metadata you see a key called `x-amz-meta-user-agent` whose value is `AWSTransfer` and `x-amz-meta-user-agent-id` whose value is `username@server-id`. The username is the Transfer Family user who uploaded the file and `server-id` is the server used for the upload. This information can be accessed using the [HeadObject](#) operation on the S3 object inside your Lambda function.

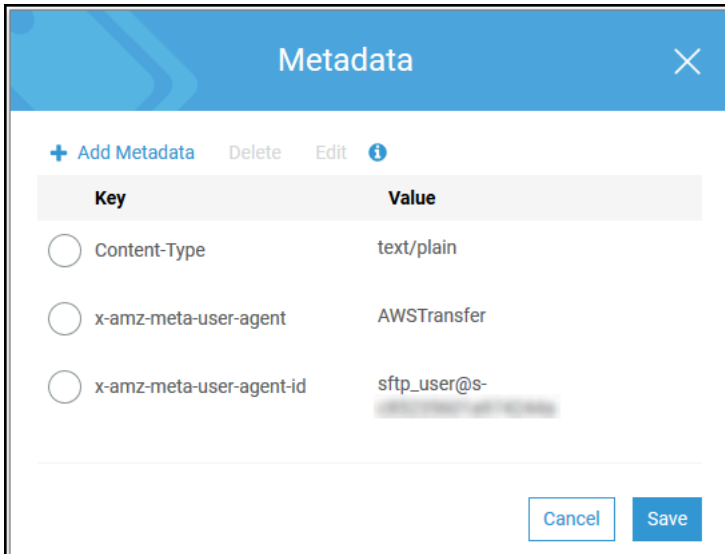

Amazon S3 event notifications

When an object is uploaded to your S3 bucket using Transfer Family, `RoleSessionName` is contained in the `Requester` field in the [S3 event notification structure](#) as `[AWS:Role Unique Identifier]/username.sessionid@server-id`. For example, the following are the contents for a sample `Requester` field from an S3 access log for a file that was copied to the S3 bucket.

```
arn:aws-cn:sts::AWS-Account-ID:assumed-role/IamRoleName/
username.sessionid@server-id
```


In the `Requester` field above, it shows the IAM Role called `IamRoleName`. For more information about configuring S3 event notifications, see [Configuring Amazon S3 event notifications](#) in the *Amazon Simple Storage Service Developer Guide*. For more information about Amazon Identity and Access Management (IAM) role unique identifiers, see [Unique identifiers](#) in the *Amazon Identity and Access Management User Guide*.

SFTP messages

This section describes client side messages that you may receive during or after your SFTP file transfers when using a Transfer Family server. For more information on any SFTP event, check your SFTP client logs. You can use that information to troubleshoot any errors, or forward that information to your network team for their help in identifying the issue.

SFTP client-side messages

Activity	Description
AUTH_FAILURE	The user failed authentication. This can be any kind of failure from a custom identity provider or service managed user. The details in the event help clarify the root cause of the failure.
CLOSE	Indicates that an opened file or directory is closed successfully.
CONNECTED/DISCONNECTED	Indicates normal connection success and disconnections.
CREATE_SYMLINK	A symbolic link was created (successfully or unsuccessfully).
DELETE	A file was deleted (successfully or unsuccessfully).
ERROR	A general, unexpected error. The associated description contains information that can help you or your network administrators to identify the specific issue.
EXIT_REASON	Emitted when an unexpected error caused termination of your SFTP session. The message associated with the event describes the cause.
MKDIR	A directory was created (successfully or unsuccessfully).

Activity	Description
OPEN	A file was opened for read or write (successfully or unsuccessfully)
PARTIAL_CLOSE	The client disconnected from the server while a file was still open with no CLOSE message received. Transfer Family stores the received portion of the file (which could in fact be the complete file) and emits the PARTIAL_CLOSE event to alert the customer about the issue. Workflows integration also receives an <code>onPartialClose</code> event to handle the file appropriately.
RENAME	A file was renamed (successfully or unsuccessfully)
RMDIR	A directory was deleted (successfully or unsuccessfully)
SETSTAT	<p>The attributes of a file are changed (successfully or unsuccessfully).</p> <div data-bbox="829 1199 1507 1751" style="border: 1px solid #add8e6; border-radius: 10px; padding: 10px;"><p> Note</p><p>Transfer Family doesn't support SETSTAT if you are using Amazon S3 for storage. The Avoid setstat errors section provides details on how to avoid SetStat errors, by turning off the setting. This avoids you receiving a <code>fail unsupported error</code> ; instead, you receive <code>success but do nothing</code> message.</p></div>

Activity	Description
TLS_RESUME_FAILURE	The server is configured to enforce TLS Session Resumption and the client does not support it.

Managing users for server endpoints

In the following sections, you can find information about how to add users using Amazon Transfer Family, Amazon Directory Service for Microsoft Active Directory or a custom identity provider.

As part of each user's properties, you also store that user's Secure Shell (SSH) public key. Doing so is required for key-based authentication. The private key is stored locally on your user's computer. When your user sends an authentication request to your server by using a client, your server first confirms that the user has access to the associated SSH private key. The server then successfully authenticates the user.

In addition, you specify a user's home directory, or landing directory, and assign an Amazon Identity and Access Management (IAM) role to the user. Optionally, you can provide a session policy to limit user access only to the home directory of your Amazon S3 bucket.

Important

Amazon Transfer Family blocks usernames that are 1 or 2 characters long from authenticating to SFTP servers. Additionally, we also block the `rootuser` name. The reason behind this is due to the large volume of malicious login attempts by password scanners.

Amazon EFS vs. Amazon S3

Characteristics of each storage option:

- To limit access: Amazon S3 supports session policies; Amazon EFS supports POSIX user, group, and secondary group IDs
- Both support public/private keys
- Both support home directories

- Both support logical directories

Note

For Amazon S3, most of the support for logical directories is via API/CLI. You can use the **Restricted** check box in the console to lock down a user to their home directory, but you cannot specify a virtual directory structure.

Logical directories

If you are specifying logical directory values for your user, the parameter you use depends on the type of user.

- For service-managed users, provide logical directory values in `HomeDirectoryMappings`.
- For custom identity provider users, provide logical directory values in `HomeDirectoryDetails`.

Enhanced HomeDirectory support for logical directories

Amazon Transfer Family now supports specifying a `HomeDirectory` value when using the `LOGICAL HomeDirectoryType`. This enhancement applies to Service Managed users, Active Directory access, and Custom Identity Provider implementations where the `HomeDirectoryDetails` are provided in the response.

Important

When specifying a `HomeDirectory` with `LOGICAL HomeDirectoryType`, the value must map to one of your logical directory mappings. The service validates this during both user creation and updates to prevent configurations that would not work.

Default behavior

By default, if left unspecified, the `HomeDirectory` is set to `"/` for `LOGICAL` mode. This behavior is unchanged and remains compatible with existing user definitions.

- Make sure to map your `HomeDirectory` to an *Entry* and not a *Target*. For more details, see [Rules for using logical directories](#).

- For details on how a virtual directory is structured see [Virtual directory structure](#).

Custom Identity Provider considerations

When using a Custom Identity Provider, you can now specify a HomeDirectory in the response while using LOGICAL HomeDirectoryType. The TestIdentityProvider API call will produce correct results when the Custom IDP specifies a HomeDirectory in LOGICAL mode.

Example Custom IDP response with HomeDirectory and LOGICAL HomeDirectoryType:

```
{
  "Role": "arn:aws:iam::123456789012:role/transfer-user-role",
  "HomeDirectoryType": "LOGICAL",
  "HomeDirectory": "/marketing",
  "HomeDirectoryDetails": "[{\"Entry\": \"\\\", \"Target\": \"\\\"/bucket/home\\\"\"}, {\"Entry\": \"\\\"/marketing\\\", \"Target\": \"\\\"/marketing-bucket/campaigns\\\"\"}]\"
}
```

Active Directory group quotas

Amazon Transfer Family has a default limit of 100 Active Directory groups per server. If your use case requires more than 100 groups, consider using a custom identity provider solution as described in [Simplify Active Directory authentication with a custom identity provider for Amazon Transfer Family](#).

This limit applies to servers using the following identity providers:

- Amazon Directory Service for Microsoft Active Directory
- Amazon Directory Service for Entra ID Domain Services

If you need to request a service limit increase, see [Amazon Web Services service quotas](#) in the *Amazon Web Services General Reference*. If your use case requires more than 100 groups, consider using a custom identity provider solution as described in [Simplify Active Directory authentication with a custom identity provider for Amazon Transfer Family](#).

For troubleshooting information related to Active Directory group limits, see [Active Directory group limits exceeded](#).

Topics

- [Working with service-managed users](#)
- [Working with custom identity providers](#)
- [Using Amazon Directory Service for Microsoft Active Directory](#)
- [Using Amazon Directory Service for Entra ID Domain Services](#)

Working with service-managed users

You can add either Amazon S3 or Amazon EFS service-managed users to your server, depending on the server's **Domain** setting. For more information, see [Configuring an SFTP, FTPS, or FTP server endpoint](#).

If you use a service-managed identity type, you add users to your file transfer protocol enabled server. When you do so, each username must be unique on your server.

To add a service-managed user programmatically, see the [example](#) for the [CreateUser](#) API.

Note

For service-managed users there is a limit of 2,000 logical directory entries. For information about using logical directories see [Using logical directories to simplify your Transfer Family directory structures](#).

Topics

- [Adding Amazon S3 service-managed users](#)
- [Adding Amazon EFS service-managed users](#)
- [Managing service-managed users](#)

Adding Amazon S3 service-managed users

Note

If you want to configure a cross account Amazon S3 bucket, follow the steps mentioned in this Knowledge Center article: [How do I configure my Amazon Transfer Family server to use an Amazon Simple Storage Service bucket that's in another Amazon account?](#)

To add an Amazon S3 service-managed user to your server

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>, then select **Servers** from the navigation pane.
2. On the **Servers** page, select the check box of the server that you want to add a user to.
3. Choose **Add user**.
4. In the **User configuration** section, for **Username**, enter the username. This username must be a minimum of 3 and a maximum of 100 characters. You can use the following characters in the username: a–z, A–Z, 0–9, underscore '_', hyphen '-', period '.' and at sign '@'. The username can't start with a hyphen '-', period '.' or at sign '@'.
5. For **Access**, choose the IAM role that you previously created that provides access to your Amazon S3 bucket.

You created this IAM role using the procedure in [Create an IAM role and policy](#). That IAM role includes an IAM policy that provides access to your Amazon S3 bucket. It also includes a trust relationship with the Amazon Transfer Family service, defined in another IAM policy. If you need fine-grained access control for your users, refer to the [Enhance data access control with Amazon Transfer Family and Amazon S3](#) blog post.

6. (Optional) For **Policy**, select one of the following:
 - **None**
 - **Existing policy**
 - **Select a policy from IAM:** allows you to choose an existing session policy. Choose **View** to see a JSON object containing the details of the policy.
 - **Auto-generate policy based on home folder:** generates a session policy for you. Choose **View** to see a JSON object containing the details of the policy.


Note

If you choose **Auto-generate policy based on home folder**, do not select **Restricted** for this user.

To learn more about session policies, see [Create an IAM role and policy](#). To learn more about creating a session policy, see [Creating a session policy for an Amazon S3 bucket](#).


7. For **Home directory**, choose the Amazon S3 bucket to store the data to transfer using Amazon Transfer Family. Enter the path to the home directory where your user lands when they log in using their client.

If you keep this parameter blank, the root directory of your Amazon S3 bucket is used. In this case, make sure that your IAM role provides access to this root directory.

 **Note**

We recommend that you choose a directory path that contains the user name of the user, which enables you to effectively use a session policy. The session policy limits user access in the Amazon S3 bucket to that user's home directory.

8. (Optional) For **Restricted**, select the check box so that your users can't access anything outside of that folder and can't see the Amazon S3 bucket or folder name.

 **Note**

Assigning the user a home directory and restricting the user to that home directory should be sufficient to lock down the user's access to the designated folder. If you need to apply further controls, use a session policy.

If you select **Restricted** for this user, you cannot select **Auto-generate policy based on home folder**, because home folder is not a defined value for Restricted users.

9. For **SSH public key**, enter the public SSH key portion of the SSH key pair.

Your key is validated by the service before you can add your new user.

 **Note**

For instructions on how to generate an SSH key pair, see [Generate SSH keys for service-managed users](#).

10. (Optional) For **Key** and **Value**, enter one or more tags as key-value pairs, and choose **Add tag**.
11. Choose **Add** to add your new user to the server that you chose.

The new user appears in the **Users** section of the **Server details** page.

Next steps – For the next step, continue on to [Transferring files over a server endpoint using a client](#).

Adding Amazon EFS service-managed users

Amazon EFS uses the Portable Operating System Interface (POSIX) file permission model to represent file ownership.

- For more details on Amazon EFS file ownership, see [Amazon EFS file ownership](#).
- For more details on setting up directories for your EFS users, see [Set up Amazon EFS users for Transfer Family](#).

To add an Amazon EFS service-managed user to your server

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>, then select **Servers** from the navigation pane.
2. On the **Servers** page, select the Amazon EFS server that you want to add a user to.
3. Choose **Add user** to display the **Add user** page.
4. In the **User configuration** section, use the following settings.
 - a. The **Username**, must be a minimum of 3 and a maximum of 100 characters. You can use the following characters in the username: a–z, A–Z, 0–9, underscore '_', hyphen '-', period '.', and at sign "@". The username can't start with a hyphen '-', period '.', or at sign "@".
 - b. For **User ID** and **Group ID**, note the following:
 - For the first user that you create, we recommend that you enter a value of **0** for both **Group ID** and **User ID**. This grants the user administrator privileges for Amazon EFS.
 - For additional users, enter the user's POSIX user ID and group ID. These IDs are used for all Amazon Elastic File System operations performed by the user.
 - For **User ID** and **Group ID**, do not use any leading zeroes. For example, **12345** is acceptable, **012345** is not.
 - c. (Optional) For **Secondary Group IDs**, enter one or more additional POSIX group IDs for each user, separated by commas.
 - d. For **Access**, choose the IAM role that:
 - Gives the user access to only the Amazon EFS resources (file systems) that you want them to access.

- Defines which file system operations that the user can and cannot perform.


We recommend that you use the IAM role for Amazon EFS file system selection with mount access and read/write permissions. For example, the combination of the following two Amazon managed policies, while quite permissive, grants the necessary permissions for your user:

- AmazonElasticFileSystemClientFullAccess
- AWSTransferConsoleFullAccess

For more information, see the blog post [Amazon Transfer Family support for Amazon Elastic File System](#).

e. For **Home directory**, do the following:

- Choose the Amazon EFS file system that you want to use for storing the data to transfer using Amazon Transfer Family.
- Decide whether to set the home directory to **Restricted**. Setting the home directory to **Restricted** has the following effects:
 - Amazon EFS users can't access any files or directories outside of that folder.
 - Amazon EFS users can't see the Amazon EFS file system name (**fs-xxxxxxx**).

 **Note**

When you select the **Restricted** option, symlinks don't resolve for Amazon EFS users.

- (Optional) Enter the path to the home directory that you want users to be in when they log in using their client.

If you don't specify a home directory, the root directory of your Amazon EFS file system is used. In this case, make sure that your IAM role provides access to this root directory.

5. For **SSH public key**, enter the public SSH key portion of the SSH key pair.

Your key is validated by the service before you can add your new user.

Note

For instructions on how to generate an SSH key pair, see [Generate SSH keys for service-managed users](#).

6. (Optional) Enter any tags for the user. For **Key** and **Value**, enter one or more tags as key-value pairs, and choose **Add tag**.
7. Choose **Add** to add your new user to the server that you chose.

The new user appears in the **Users** section of the **Server details** page.

Issues that you might encounter when you first SFTP to your Transfer Family server:

- If you run the `sftp` command and the prompt doesn't appear, you might encounter the following message:

```
Couldn't canonicalize: Permission denied
```

```
Need cwd
```

In this case, you must increase the policy permissions for your user's role. You can add an Amazon managed policy, such as `AmazonElasticFileSystemClientFullAccess`.

- If you enter `pwd` at the `sftp` prompt to view the user's home directory, you might see the following message, where `USER-HOME-DIRECTORY` is the home directory for the SFTP user:

```
remote readdir("/USER-HOME-DIRECTORY"): No such file or directory
```

In this case, you should be able to navigate to the parent directory (`cd ..`), and create the user's home directory (`mkdir username`).

Next steps – For the next step, continue on to [Transferring files over a server endpoint using a client](#).

Managing service-managed users

In this section, you can find information about how to view a list of users, how to edit user details, and how to add an SSH public key.

- [View a list of users](#)
- [View or edit user details](#)
- [Delete a user](#)
- [Add SSH public key](#)
- [Delete SSH public key](#)

To find a list of your users

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. Select **Servers** from the navigation pane to display the **Servers** page.
3. Choose the identifier in the **Server ID** column to see the **Server details** page.
4. Under **Users**, view a list of users.

To view or edit user details

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. Select **Servers** from the navigation pane to display the **Servers** page.
3. Choose the identifier in the **Server ID** column to see the **Server details** page.
4. Under **Users**, choose a username to see the **User details** page.

You can change the user's properties on this page by choosing **Edit**.

5. On the **Users details** page, choose **Edit** next to **User configuration**.

Edit configuration

User configuration

Access [Info](#)
User's IAM role for Amazon S3 access

Admin ▼

Policy [Info](#)
Scope down policy to apply to the user

None
 Existing policy
 Select a policy from IAM

Home directory
User's login directory

Choose an S3 bucket ▼

Restricted [Info](#)

- On the **Edit configuration** page, for **Access**, choose the IAM role that you previously created that provides access to your Amazon S3 bucket.

You created this IAM role using the procedure in [Create an IAM role and policy](#). That IAM role includes an IAM policy that provides access to your Amazon S3 bucket. It also includes a trust relationship with the Amazon Transfer Family service, defined in another IAM policy.

- (Optional) For **Policy**, choose one of the following:
 - None**
 - Existing policy**
 - Select a policy from IAM** to choose an existing policy. Choose **View** to see a JSON object containing the details of the policy.

To learn more about session policies, see [Create an IAM role and policy](#). To learn more about creating a session policy, see [Creating a session policy for an Amazon S3 bucket](#).

- For **Home directory**, choose the Amazon S3 bucket to store the data to transfer using Amazon Transfer Family. Enter the path to the home directory where your user lands when they log in using their client.

If you leave this parameter blank, the `root` directory of your Amazon S3 bucket is used. In this case, make sure that your IAM role provides access to this `root` directory.

Note

We recommend that you choose a directory path that contains the user name of the user, which enables you to effectively use a session policy. The session policy limits user access in the Amazon S3 bucket to that user's home directory.

9. (Optional) For **Restricted**, select the check box so that your users can't access anything outside of that folder and can't see the Amazon S3 bucket or folder name.

Note

When assigning the user a home directory and restricting the user to that home directory, this should be sufficient enough to lock down the user's access to the designated folder. Use a session policy when you need to apply further controls.

10. Choose **Save** to save your changes.

To delete a user


1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. Select **Servers** from the navigation pane to display the **Servers** page.
3. Choose the identifier in the **Server ID** column to see the **Server details** page.
4. Under **Users**, choose a username to see the **User details** page.
5. On the **Users details** page, choose **Delete** to the right of the username.
6. In the confirmation dialog box that appears, enter the word **delete**, and then choose **Delete** to confirm that you want to delete the user.

The user is deleted from the **users** list.

To add an SSH public key for a user

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the navigation pane, choose **Servers**.

3. Choose the identifier in the **Server ID** column to see the **Server details** page.
4. Under **Users**, choose a username to see the **User details** page.
5. Choose **Add SSH public key** to add a new SSH public key to a user.

 **Note**

SSH keys are used only by servers that are enabled for Secure Shell (SSH) File Transfer Protocol (SFTP). For information about how to generate an SSH key pair, see [Generate SSH keys for service-managed users](#).

6. For **SSH public key**, enter the SSH public key portion of the SSH key pair.

Your key is validated by the service before you can add your new user. The format of the SSH key is `ssh-rsa string`. To generate an SSH key pair, see [Generate SSH keys for service-managed users](#).

7. Choose **Add key**.

To delete an SSH public key for a user

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the navigation pane, choose **Servers**.
3. Choose the identifier in the **Server ID** column to see the **Server details** page.
4. Under **Users**, choose a username to see the **User details** page.
5. To delete a public key, select its SSH key check box and choose **Delete**.

Working with custom identity providers

Amazon Transfer Family offers several options for custom identity providers to authenticate and authorize users for secure file transfers. Here are the main approaches:

- [Custom identity provider solution](#)—This topic describes the Transfer Family custom identity provider solution, using a toolkit hosted in GitHub.

Note

For most use cases, this is the recommended option. Specifically, if you need to support more than 100 Active Directory groups, the custom identity provider solution offers a scalable alternative without group limitations. This solution is described in the blog post, [Simplify Active Directory authentication with a custom identity provider for Amazon Transfer Family](#).

- [Using Amazon Lambda to integrate your identity provider](#)—This topic describes how to create an Amazon Lambda function that connects to your custom identity provider.

To authenticate your users, you can use your existing identity provider with Amazon Transfer Family. You integrate your identity provider using an Amazon Lambda function, which authenticates and authorizes your users for access to Amazon S3 or Amazon Elastic File System (Amazon EFS). For details, see [Using Amazon Lambda to integrate your identity provider](#). You can also access CloudWatch graphs for metrics such as number of files and bytes transferred in the Amazon Transfer Family Management Console, giving you a single pane of glass to monitor file transfers using a centralized dashboard.

- [Using Amazon API Gateway to integrate your identity provider](#)—This topic describes how to use an Amazon Lambda function to back an Amazon API Gateway method.

You can provide a RESTful interface with a single Amazon API Gateway method. Transfer Family calls this method to connect to your identity provider, which authenticates and authorizes your users for access to Amazon S3 or Amazon EFS. Use this option if you need a RESTful API to integrate your identity provider or if you want to use Amazon WAF to leverage its capabilities for geo-blocking or rate-limiting requests. For details, see [Using Amazon API Gateway to integrate your identity provider](#).

- Transfer Family provides a blog post and a workshop that walk you through building a file transfer solution. This solution leverages Amazon Transfer Family for managed SFTP/FTPS endpoints and Amazon Cognito and DynamoDB for user management.

The blog post is available at [Using Amazon Cognito as an identity provider with Amazon Transfer Family and Amazon S3](#). You can view the details for the workshop [here](#).

Note

For custom identity providers, the username must be a minimum of 3 and a maximum of 100 characters. You can use the following characters in the username: a–z, A–Z, 0–9, underscore '_', hyphen '-', period '.' and at sign '@'. The username can't start with a hyphen '-', period '.' or at sign '@'.

When implementing a custom identity provider, consider the following best practices:

- Deploy the solution in the same Amazon Web Services account and region as your Transfer Family servers.
- Implement the principle of least privilege when configuring IAM roles and policies.
- Use features like IP allow-listing and standardized logging for enhanced security.
- Test your custom identity provider thoroughly in a non-production environment before deployment.

Topics

- [Custom identity provider solution](#)
- [Using Amazon Lambda to integrate your identity provider](#)
- [Using Amazon API Gateway to integrate your identity provider](#)
- [Using multiple authentication methods](#)

Custom identity provider solution


The Amazon Transfer Family custom identity provider solution is a modular custom identity provider solution that solves for many common authentication and authorization use cases that enterprises have when implementing the service. This solution provides a reusable foundation for implementing custom identity providers with granular per-user session configuration and separates authentication and authorization logic, offering a flexible and easy-to-maintain foundation for various use cases.

With the Amazon Transfer Family custom identity provider solution, you can address common enterprise authentication and authorization use cases. This modular solution offers:

- A reusable foundation for implementing custom identity providers

- Granular per-user session configuration
- Separated authentication and authorization logic

The solution provides a flexible and maintainable base for various use cases. To get started, review the toolkit at <https://github.com/aws-samples/toolkit-for-aws-transfer-family>, then follow the deployment instructions in the [Getting started](#) section.

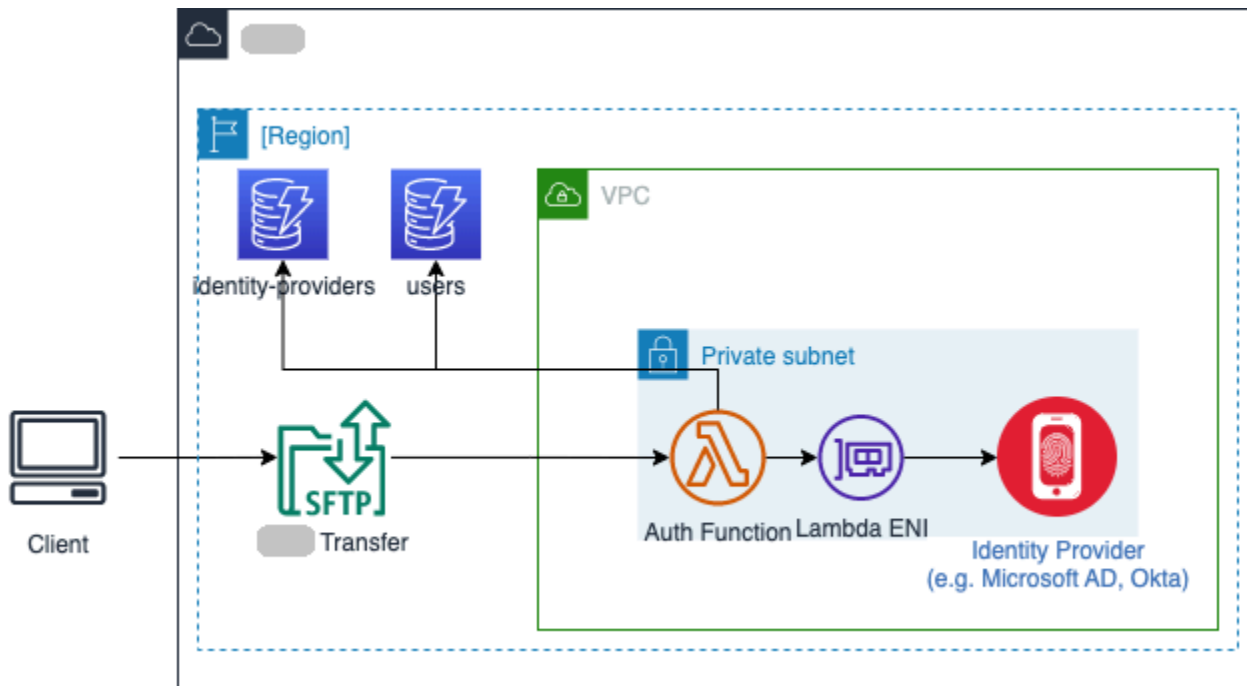

Note

If you have previously used custom identity provider templates and examples, consider adopting this solution instead. Moving forward, provider-specific modules will standardize on this solution. Ongoing maintenance and feature enhancements will be applied to this solution.

This solution contains standard patterns for implementing a custom provider that accounts for details including logging and where to store the additional session metadata needed for Amazon Transfer Family, such as the `HomeDirectoryDetails` parameter. This solution provides a reusable foundation for implementing custom identity providers with granular per-user session configuration, and decouples the identity provider authentication logic from the reusable logic that builds a configuration that is returned to Transfer Family to complete authentication and establish settings for the session.

The code and supporting resources for this solution are available at <https://github.com/aws-samples/toolkit-for-aws-transfer-family>.

The toolkit contains the following features:

- An [Amazon Serverless Application Model](#) template that provisions the required resources. Optionally, deploy and configure Amazon API Gateway to incorporate Amazon WAF, as described in the blog post [Securing Amazon Transfer Family with Amazon Web Application Firewall and Amazon API Gateway](#).
- An [Amazon DynamoDB](#) schema to store configuration metadata about identity providers, including user session settings such as HomeDirectoryDetails, Role, and Policy.
- A modular approach that enables you to add new identity providers to the solution in the future, as modules.
- Attribute retrieval: Optionally retrieve IAM role and POSIX Profile (UID and GID) attributes from supported identity providers, including AD, LDAP, and Okta.
- Support for multiple identity providers connected to a single Transfer Family server and multiple Transfer Family servers using the same deployment of the solution.
- Built-in IP allow-list checking such as IP allow lists that can optionally be configured on a per-user or per-identity provider basis.
- Detailed logging with configurable log-level and tracing support to aid in troubleshooting.

Before you begin to deploy the custom identity provider solution, you need to have the following Amazon resources.

- An Amazon Virtual Private Cloud (VPC) with private subnets, with internet connectivity through either a NAT gateway or a DynamoDB gateway endpoint.
- Appropriate IAM permissions to perform the following tasks:
 - Deploy the `custom-idp.yaml` Amazon CloudFormation template,
 - Create Amazon CodePipeline projects
 - Create Amazon CodeBuild projects
 - Create IAM roles and policies

⚠ Important

You must deploy the solution to the same Amazon Web Services account and Amazon Web Services Region that contains your target Transfer Family servers.

Supported identity providers

The following list contains details for identity providers that are supported for the custom identity provider solution.


Provider	Password flows	Public key flows	Multi-factor	Attribute retrieval	Details
Active Directory and LDAP	Yes	Yes*	No	Yes	User verification can be performed as part of public key authentication flow. *Retrieving keys from AD/LDAP is not supported.
Argon2 (local hash)	Yes	No	No	No	Argon2 hashes are stored in the user record for 'local' password based authentication use cases.

Provider	Password flows	Public key flows	Multi-factor	Attribute retrieval	Details
Amazon Cognito	Yes	No	Yes*	No	Time-based One-Time Password (TOTP)-based multi-factor authentication only. *SMS-based MFA is not supported.
Entra ID (formerly Azure AD)	Yes	No	No	No	
Okta	Yes	Yes	Yes*	Yes	TOTP-based MFA only.
Public key	No	Yes	No	No	Public keys are stored in the user record in DynamoDB.
Secrets Manager	Yes	Yes	No	No	

Using Amazon Lambda to integrate your identity provider

This topic describes how to create an Amazon Lambda function that connects to your custom identity provider. You can use any custom identity provider, such as Okta, Secrets Manager, OneLogin, or a custom data store that includes authorization and authentication logic.

For most use cases, the recommended way to configure a custom identity provider is to use the [Custom identity provider solution](#).

 **Note**

Before you create a Transfer Family server that uses Lambda as the identity provider, you must create the function. For an example Lambda function, see [Example Lambda functions](#). Or, you can deploy a CloudFormation stack that uses one of the [Lambda function templates](#). Also, make sure your Lambda function uses a resource-based policy that trusts Transfer Family. For an example policy, see [Lambda resource-based policy](#).

1. Open the [Amazon Transfer Family console](#).
2. Choose **Create server** to open the **Create server** page. For **Choose an identity provider**, choose **Custom Identity Provider**, as shown in the following screenshot.

Choose an identity provider

Identity Provider for SFTP, FTPS, or FTP

Identity provider type
An identity provider manages user access for authentication and authorization

Service managed
Create and manage users within the service

Directory Service [Info](#)
Enable users in Managed AD or use your own self-managed AD in your on-premises environment or in

Custom Identity Provider [Info](#)
Manage users by integrating an identity provider of your choice

Use Amazon Lambda to connect your identity provider [Info](#)
Invoke an Amazon Lambda function to call your identity provider's API for user authentication and authorization

Use Amazon API Gateway to connect your identity provider [Info](#)
Use a RESTful API method to call your identity provider's API for user authentication and authorization

Amazon Lambda function

Choose a Lambda function ↕ ↻

Authentication methods
Choose which authentication methods are required for users to connect to your server

Password OR public key

Password ONLY

Public Key ONLY

Password AND public key

[i](#) Either a valid password or valid private key will be required during user authentication

Cancel
Previous
Next

[i](#) Note

The choice of authentication methods is only available if you enable SFTP as one of the protocols for your Transfer Family server.

3. Make sure the default value, **Use Amazon Lambda to connect your identity provider**, is selected.
4. For **Amazon Lambda function**, choose the name of your Lambda function.

5. Fill in the remaining boxes, and then choose **Create server**. For details on the remaining steps for creating a server, see [Configuring an SFTP, FTPS, or FTP server endpoint](#).

Lambda resource-based policy

You must have a policy that references the Transfer Family server and Lambda ARNs. For example, you could use the following policy with your Lambda function that connects to your identity provider. The policy is escaped JSON as a string.

```
"Policy":
"{
  "Version": "2012-10-17",
  "Id": "default",
  "Statement": [
    {
      "Sid": "AllowTransferInvocation",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "lambda:InvokeFunction",
      "Resource": "arn:aws-cn:lambda:region:account-id:function:my-lambda-auth-
function",
      "Condition": {
        "ArnLike": {
          "AWS:SourceArn": "arn:aws-cn:transfer:region:account-id:server/server-id"
        }
      }
    }
  ]
}"
```

Note

In the example policy above, replace each *user input placeholder* with your own information.

Event message structure

The event message structure from SFTP server sent to the authorizer Lambda function for a custom IDP is as follows.

```
{
  "username": "value",
  "password": "value",
  "protocol": "SFTP",
  "serverId": "s-abcd123456",
  "sourceIp": "192.168.0.100"
}
```

Where `username` and `password` are the values for the sign-in credentials that are sent to the server.

For example, you enter the following command to connect:

```
sftp bobusa@server_hostname
```

You are then prompted to enter your password:

```
Enter password:
mysecretpassword
```

You can check this from your Lambda function by printing the passed event from within the Lambda function. It should look similar to the following text block.

```
{
  "username": "bobusa",
  "password": "mysecretpassword",
  "protocol": "SFTP",
  "serverId": "s-abcd123456",
  "sourceIp": "192.168.0.100"
}
```

The event structure is similar for FTP and FTPS: the only difference is those values are used for the `protocol` parameter, rather than SFTP.

Lambda functions for authentication

To implement different authentication strategies, edit the Lambda function. To help you meet your application's needs, you can deploy a CloudFormation stack. For more information about Lambda, see the [Amazon Lambda Developer Guide](#) or [Building Lambda functions with Node.js](#).

Topics

- [Valid Lambda values](#)
- [Example Lambda functions](#)
- [Testing your configuration](#)
- [Lambda function templates](#)

Valid Lambda values

The following table describes details for the values that Transfer Family accepts for Lambda functions that are used for custom identity providers.

Value	Description	Required
Role	Specifies the Amazon Resource Name (ARN) of the IAM role that controls your users' access to your Amazon S3 bucket or Amazon EFS file system. The policies attached to this role determine the level of access that you want to provide your users when transferring files into and out of your Amazon S3 or Amazon EFS file system. The IAM role should also contain a trust relationship that allows the server to access your resources when servicing your users' transfer requests.	Required

Value	Description	Required
	For details on establishing a trust relationship, see To establish a trust relationship .	
PosixProfile	The full POSIX identity, including user ID (Uid), group ID (Gid), and any secondary group IDs (Secondary Gids), that controls your users' access to your Amazon EFS file systems. The POSIX permissions that are set on files and directories in your file system determine the level of access your users get when transferring files into and out of your Amazon EFS file systems.	Required for Amazon EFS backing storage
PublicKeys	A list of SSH public key values that are valid for this user. An empty list implies that this is not a valid login. Must not be returned during password authentication.	Optional
Policy	A session policy for your user so that you can use the same IAM role across multiple users. This policy scopes down user access to portions of their Amazon S3 bucket.	Optional

Value	Description	Required
HomeDirectoryType	<p>The type of landing directory (folder) that you want your users' home directory to be when they log in to the server.</p> <ul style="list-style-type: none">• If you set it to PATH, the user sees the absolute Amazon S3 bucket or Amazon EFS paths as is in their file transfer protocol clients.• If you set it to LOGICAL, you must provide mappings in the HomeDirectoryDetails parameter to make Amazon S3 or Amazon EFS paths visible to your users.	Optional
HomeDirectoryDetails	<p>Logical directory mappings that specify which Amazon S3 or Amazon EFS paths and keys should be visible to your user and how you want to make them visible. You must specify the Entry and Target pair, where Entry shows how the path is made visible and Target is the actual Amazon S3 or Amazon EFS path.</p>	Required if HomeDirectoryType has a value of LOGICAL

Value	Description	Required
HomeDirectory	The landing directory for a user when they log in to the server using the client.	Optional

Note

HomeDirectoryDetails is a string representation of a JSON map. This is in contrast to PosixProfile, which is an actual JSON map object, and PublicKeys which is a JSON array of strings. See the code examples for the language-specific details.

Example Lambda functions

This section presents some example Lambda functions, in both NodeJS and Python.

Note

In these examples, the user, role, POSIX profile, password, and home directory details are all examples, and must be replaced with your actual values.

Logical home directory, NodeJS

The following NodeJS example function provides the details for a user that has a [logical home directory](#).

```
// GetUserConfig Lambda

exports.handler = (event, context, callback) => {
  console.log("Username:", event.username, "ServerId: ", event.serverId);

  var response;
  // Check if the username presented for authentication is correct. This doesn't
  // check the value of the server ID, only that it is provided.
  if (event.serverId !== "" && event.username == 'example-user') {
    var homeDirectoryDetails = [
      {
```

```

    Entry: "/",
    Target: "/fs-faa1a123"
  }
];
response = {
  Role: 'arn:aws-cn:iam::123456789012:role/transfer-access-role', // The user is
authenticated if and only if the Role field is not blank
  PosixProfile: {"Gid": 65534, "Uid": 65534}, // Required for EFS access, but
not needed for S3
  HomeDirectoryDetails: JSON.stringify(homeDirectoryDetails),
  HomeDirectoryType: "LOGICAL",
};

// Check if password is provided
if (!event.password) {
  // If no password provided, return the user's SSH public key
  response['PublicKeys'] = [ "ssh-
rsa abcdef0123456789abcdef0123456789abcdef0123456789" ];
  // Check if password is correct
} else if (event.password !== 'Password1234') {
  // Return HTTP status 200 but with no role in the response to indicate
authentication failure
  response = {};
}
} else {
  // Return HTTP status 200 but with no role in the response to indicate
authentication failure
  response = {};
}
callback(null, response);
};

```

Path-based home directory, NodeJS

The following NodeJS example function provides the details for a user that has a path-based home directory.

```

// GetUserConfig Lambda

exports.handler = (event, context, callback) => {
  console.log("Username:", event.username, "ServerId: ", event.serverId);

  var response;

```



```

// Check if the username presented for authentication is correct. This doesn't
check the value of the server ID, only that it is provided.
// There is also event.protocol (one of "FTP", "FTPS", "SFTP") and event.sourceIp
(e.g., "127.0.0.1") to further restrict logins.
if (event.serverId !== "" && event.username == 'example-user') {
  response = {
    Role: 'arn:aws-cn:iam::123456789012:role/transfer-access-role', // The user is
authenticated if and only if the Role field is not blank
    Policy: '', // Optional, JSON stringified blob to further restrict this user's
permissions
    HomeDirectory: '/fs-faa1a123' // Not required, defaults to '/'
  };

  // Check if password is provided
  if (!event.password) {
    // If no password provided, return the user's SSH public key
    response['PublicKeys'] = [ "ssh-
rsa abcdef0123456789abcdef0123456789abcdef0123456789abcdef0123456789" ];
    // Check if password is correct
  } else if (event.password !== 'Password1234') {
    // Return HTTP status 200 but with no role in the response to indicate
authentication failure
    response = {};
  }
  } else {
    // Return HTTP status 200 but with no role in the response to indicate
authentication failure
    response = {};
  }
  callback(null, response);
};

```

Logical home directory, Python

The following Python example function provides the details for a user that has a [logical home directory](#).

```

# GetUserConfig Python Lambda with LOGICAL HomeDirectoryDetails
import json

def lambda_handler(event, context):
    print("Username: {}, ServerId: {}".format(event['username'], event['serverId']))

```

```

response = {}

# Check if the username presented for authentication is correct. This doesn't
check the value of the server ID, only that it is provided.
if event['serverId'] != '' and event['username'] == 'example-user':
    homeDirectoryDetails = [
        {
            'Entry': '/',
            'Target': '/fs-faa1a123'
        }
    ]
    response = {
        'Role': 'arn:aws-cn:iam::123456789012:role/transfer-access-role', # The user
will be authenticated if and only if the Role field is not blank
        'PosixProfile': {"Gid": 65534, "Uid": 65534}, # Required for EFS access, but
not needed for S3
        'HomeDirectoryDetails': json.dumps(homeDirectoryDetails),
        'HomeDirectoryType': "LOGICAL"
    }

# Check if password is provided
if event.get('password', '') == '':
    # If no password provided, return the user's SSH public key
    response['PublicKeys'] = [ "ssh-
rsa abcdef0123456789abcdef0123456789abcdef0123456789abcdef0123456789" ]
# Check if password is correct
elif event['password'] != 'Password1234':
    # Return HTTP status 200 but with no role in the response to indicate
authentication failure
    response = {}
else:
    # Return HTTP status 200 but with no role in the response to indicate
authentication failure
    response = {}

return response

```

Path-based home directory, Python

The following Python example function provides the details for a user that has a path-based home directory.

```
# GetUserConfig Python Lambda with PATH HomeDirectory
```

```

def lambda_handler(event, context):
    print("Username: {}, ServerId: {}".format(event['username'], event['serverId']))

    response = {}

    # Check if the username presented for authentication is correct. This doesn't
    # check the value of the server ID, only that it is provided.
    # There is also event.protocol (one of "FTP", "FTPS", "SFTP") and event.sourceIp
    # (e.g., "127.0.0.1") to further restrict logins.
    if event['serverId'] != '' and event['username'] == 'example-user':
        response = {
            'Role': 'arn:aws-cn:iam::123456789012:role/transfer-access-role', # The user
            # will be authenticated if and only if the Role field is not blank
            'Policy': '', # Optional, JSON stringified blob to further restrict this
            # user's permissions
            'HomeDirectory': '/fs-fs-faa1a123',
            'HomeDirectoryType': "PATH" # Not strictly required, defaults to PATH
        }

        # Check if password is provided
        if event.get('password', '') == '':
            # If no password provided, return the user's SSH public key
            response['PublicKeys'] = [ "ssh-
rsa abcdef0123456789abcdef0123456789abcdef0123456789abcdef0123456789" ]
            # Check if password is correct
            elif event['password'] != 'Password1234':
                # Return HTTP status 200 but with no role in the response to indicate
                # authentication failure
                response = {}
            else:
                # Return HTTP status 200 but with no role in the response to indicate
                # authentication failure
                response = {}

    return response

```

Testing your configuration

After you create your custom identity provider, you should test your configuration.

Console

To test your configuration by using the Amazon Transfer Family console

1. Open the [Amazon Transfer Family console](#).
2. On the **Servers** page, choose your new server, choose **Actions**, and then choose **Test**.
3. Enter the text for **Username** and **Password** that you set when you deployed the Amazon CloudFormation stack. If you kept the default options, the username is `myuser` and the password is `MySuperSecretPassword`.
4. Choose the **Server protocol** and enter the IP address for **Source IP**, if you set them when you deployed the Amazon CloudFormation stack.

CLI

To test your configuration by using the Amazon CLI

1. Run the [test-identity-provider](#) command. Replace each *user input placeholder* with your own information, as described in the subsequent steps.

```
aws transfer test-identity-provider --server-id s-1234abcd5678efgh --user-name myuser --user-password MySuperSecretPassword --server-protocol FTP --source-ip 127.0.0.1
```

2. Enter the server ID.
3. Enter the username and password that you set when you deployed the Amazon CloudFormation stack. If you kept the default options, the username is `myuser` and the password is `MySuperSecretPassword`.
4. Enter the server protocol and source IP address, if you set them when you deployed the Amazon CloudFormation stack.

If user authentication succeeds, the test returns a `StatusCode: 200` HTTP response, an empty string `Message: ""` (which would contain a reason for failure otherwise), and a `Response` field.

Note

In the response example below, the Response field is a JSON object that has been "stringified" (converted into a flat JSON string that can be used inside a program), and contains the details of the user's roles and permissions.

```
{
  "Response": "{\\\"Policy\\\":\\\"{\\\"Version\\\":\\\"2012-10-17\\\",\\\"Statement\\\":
[\\\"Sid\\\":\\\"ReadAndListAllBuckets\\\",\\\"Effect\\\":\\\"Allow\\\",\\\"Action\\
\\\":[\\\"s3:ListAllMybuckets\\\",\\\"s3:GetBucketLocation\\\",\\\"s3:ListBucket\\\",\\
\\\"s3:GetObjectVersion\\\",\\\"s3:GetObjectVersion\\\"],\\\"Resource\\\":\\\"*\\\"]}\\\",
\\\"Role\\\":\\\"arn:aws-cn:iam::000000000000:role/MyUserS3AccessRole\\\",\\\"HomeDirectory\\\":\\\"/
\\\"}\\\",
  \"StatusCode\": 200,
  \"Message\": \"\"
}
```

Lambda function templates

You can deploy an Amazon CloudFormation stack that uses a Lambda function for authentication. We provide several templates that authenticate and authorize your users using sign-in credentials. You can modify these templates or Amazon Lambda code to further customize user access.

Note

You can create a FIPS-enabled Amazon Transfer Family server through Amazon CloudFormation by specifying a FIPS-enabled security policy in your template. Available security policies are described in [Security policies for Amazon Transfer Family servers](#)

To create an Amazon CloudFormation stack to use for authentication

1. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
2. Follow the instructions for deploying an Amazon CloudFormation stack from an existing template in [Selecting a stack template](#) in the *Amazon CloudFormation User Guide*.
3. Use one of the following templates to create a Lambda function to use for authentication in Transfer Family.

- [Classic \(Amazon Cognito\) stack template](#)

A basic template for creating a Amazon Lambda for use as a custom identity provider in Amazon Transfer Family. It authenticates against Amazon Cognito for password-based authentication and public keys are returned from an Amazon S3 bucket if public key based authentication is used. After deployment, you can modify the Lambda function code to do something different.

- [Amazon Secrets Manager stack template](#)

A basic template that uses Amazon Lambda with an Amazon Transfer Family server to integrate Secrets Manager as an identity provider. It authenticates against an entry in Amazon Secrets Manager of the format `aws/transfer/server-id/username`. Additionally, the secret must hold the key-value pairs for all user properties returned to Transfer Family. After deployment, you can modify the Lambda function code to do something different.

- [Okta stack template](#): A basic template that uses Amazon Lambda with an Amazon Transfer Family server to integrate Okta as a custom identity provider.
- [Okta-mfa stack template](#): A basic template that uses Amazon Lambda with an Amazon Transfer Family server to integrate Okta, with Multi Factor Authentication, as a custom identity provider.
- [Azure Active Directory template](#): details for this stack are described in the blog post [Authenticating to Amazon Transfer Family with Azure Active Directory and Amazon Lambda](#).

After the stack has been deployed, you can view details about it on the **Outputs** tab in the CloudFormation console.

Deploying one of these stacks is the easiest way to integrate a custom identity provider into the Transfer Family workflow.

Using Amazon API Gateway to integrate your identity provider

This topic describes how to use an Amazon Lambda function to back an API Gateway method. Use this option if you need a RESTful API to integrate your identity provider or if you want to use Amazon WAF to leverage its capabilities for geo-blocking or rate-limiting requests.

For most use cases, the recommended way to configure a custom identity provider is to use the [Custom identity provider solution](#).

Limitations if using an API Gateway to integrate your identity provider

- This configuration does not support custom domains.
- This configuration does not support a private API Gateway URL.

If you need either of these, you can use Lambda as an identity provider, without API Gateway. For details, see [Using Amazon Lambda to integrate your identity provider](#).

Authenticating using an API Gateway method

You can create an API Gateway method for use as an identity provider for Transfer Family. This approach provides a highly secure way for you to create and provide APIs. With API Gateway, you can create an HTTPS endpoint so that all incoming API operations are transmitted with greater security. For more details about the API Gateway service, see the [API Gateway Developer Guide](#).

API Gateway offers an authorization method named `AWS_IAM`, which gives you the same authentication based on Amazon Identity and Access Management (IAM) that Amazon uses internally. If you enable authentication with `AWS_IAM`, only callers with explicit permissions to call an API can reach that API's API Gateway method.

To use your API Gateway method as a custom identity provider for Transfer Family, enable IAM for your API Gateway method. As part of this process, you provide an IAM role with permissions for Transfer Family to use your gateway.

Note

To improve security, you can configure a web application firewall. Amazon WAF is a web application firewall that lets you monitor the HTTP and HTTPS requests that are forwarded to an Amazon API Gateway. For details, see [Add a web application firewall](#).

To use your API Gateway method for custom authentication with Transfer Family

1. Create an Amazon CloudFormation stack. To do this:

Note

The stack templates have been updated to use BASE64-encoded passwords: for details, see [Improvements to the Amazon CloudFormation templates](#).

- a. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
- b. Follow the instructions for deploying an Amazon CloudFormation stack from an existing template in [Selecting a stack template](#) in the *Amazon CloudFormation User Guide*.
- c. Use one of the following basic templates to create an Amazon Lambda-backed API Gateway method for use as a custom identity provider in Transfer Family.

- [Basic stack template](#)

By default, your API Gateway method is used as a custom identity provider to authenticate a single user in a single server using a hard-coded SSH (Secure Shell) key or password. After deployment, you can modify the Lambda function code to do something different.

- [Amazon Secrets Manager stack template](#)

By default, your API Gateway method authenticates against an entry in Secrets Manager of the format `aws/transfer/server-id/username`. Additionally, the secret must hold the key-value pairs for all user properties returned to Transfer Family. After deployment, you can modify the Lambda function code to do something different. For more information, see the blog post [Enable password authentication for Amazon Transfer Family using Amazon Secrets Manager](#).

- [Okta stack template](#)

Your API Gateway method integrates with Okta as a custom identity provider in Transfer Family. For more information, see the blog post [Using Okta as an identity provider with Amazon Transfer Family](#).

Deploying one of these stacks is the easiest way to integrate a custom identity provider into the Transfer Family workflow. Each stack uses the Lambda function to support your API method based on API Gateway. You can then use your API method as a custom identity

provider in Transfer Family. By default, the Lambda function authenticates a single user called `myuser` with a password of `MySuperSecretPassword`. After deployment, you can edit these credentials or update the Lambda function code to do something different.

Important

We recommend that you edit the default user and password credentials.

After the stack has been deployed, you can view details about it on the **Outputs** tab in the CloudFormation console. These details include the stack's Amazon Resource Name (ARN), the ARN of the IAM role that the stack created, and the URL for your new gateway.

Note

If you are using the custom identity provider option to enable password-based authentication for your users, and you enable the request and response logging provided by API Gateway, API Gateway logs your users' passwords to your Amazon CloudWatch Logs. We don't recommend using this log in your production environment. For more information, see [Set up CloudWatch API logging in API Gateway](#) in the *API Gateway Developer Guide*.

2. Check the API Gateway method configuration for your server. To do this:
 - a. Open the API Gateway console at <https://console.amazonaws.cn/apigateway/>.
 - b. Choose the **Transfer Custom Identity Provider basic template API** that the Amazon CloudFormation template generated. You might need to select your region to see your gateways.
 - c. In the **Resources** pane, choose **GET**. The following screenshot shows the correct method configuration.

Resources

- APIs
- Custom Domain Names
- VPC Links
- API: Transfer Custo...
- Resources
- Stages
- Authorizers
- Gateway Responses
- Models
- Resource Policy
- Documentation
- Dashboard
- Settings
- Usage Plans
- API Keys
- Client Certificates
- Settings

Method Execution /servers/{serverId}/users/{username}/config - GET - Method ...

Provide information about this method's authorization settings and the parameters it can receive.

Settings

Authorization IAM

Request Validator NONE

API Key Required false

Request Paths

Name	Caching	
serverId	<input type="checkbox"/>	
username	<input type="checkbox"/>	

URL Query String Parameters

Name	Required	Caching	
protocol	<input type="checkbox"/>	<input type="checkbox"/>	
sourceIp	<input type="checkbox"/>	<input type="checkbox"/>	

Add query string

At this point, your API gateway is ready to be deployed.

- For **Actions**, choose **Deploy API**. For **Deployment stage**, choose **prod**, and then choose **Deploy**.

After the API Gateway method is successfully deployed, view its performance in **Stages** > **Stage details**, as shown in the following screenshot.

Note

Copy the **Invoke URL** address that appears at the top of the screen. You might need it for the next step.

The screenshot displays the 'Stages' page in the Amazon Transfer Family console. The breadcrumb navigation at the top reads 'API Gateway > APIs > Transfer Custom Identity Provider basic template API > Stages'. On the left, a sidebar shows a list of stages with 'prod' selected. The main content area is titled 'Stage details info' and includes an 'Edit' button. The details are organized into several sections:

- Stage name:** prod
- Rate:** 10000
- Web ACL:** -
- API cache:** Inactive
- Burst:** 5000
- Client certificate:** -
- Invoke URL:** [https://\[redacted\].execute-api-us-east-1.amazonaws.com/prod](https://[redacted].execute-api-us-east-1.amazonaws.com/prod) (highlighted with a red box)
- Active deployment:** t8aqrm on December 12, 2023, 10:49 (UTC-05:00)

Below the details is the 'Logs and tracing info' section, also with an 'Edit' button. It shows:

- CloudWatch logs:** Error and info logs
- Detailed metrics:** Inactive
- X-Ray tracing:** Inactive
- Custom access logging:** Inactive

At the bottom, there are tabs for 'Stage variables', 'Deployment history', 'Documentation history', 'Canary', and 'Tags'. The 'Stage variables' tab is active, showing 'Stage variables (0/0)' with an 'Edit' button. A search bar contains 'Find resources'. Below is a table with columns 'Name' and 'Value', which is currently empty. A message states 'No variables associated with the stage.' and a 'Manage variables' button is at the bottom.

4. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
5. A Transfer Family should have been created for you, when you created the stack. If not, configure your server using these steps.
 - a. Choose **Create server** to open the **Create server** page. For **Choose an identity provider**, choose **Custom**, then select **Use Amazon API Gateway to connect to your identity provider**, as shown in the following screenshot.

Choose an identity provider

Identity provider

Identity provider type
An identity provider manages user access for authentication and authorization

Service managed
Create and manage users within the service

Directory
Service [Info](#)
Enable users in Managed AD or use your own self-managed AD in your on-premises environment or in

Custom Identity Provider [Info](#)
Manage users by integrating an identity provider of your choice

Use [Lambda](#) to connect your identity provider [Info](#)
Invoke an [Lambda](#) function to call your identity provider's API for user authentication and authorization

Use Amazon API Gateway to connect your identity provider [Info](#)
Use a RESTful API method to call your identity provider's API for user authentication and authorization

Provide an Amazon API Gateway URL

Role
IAM role for the service to invoke your Amazon API Gateway URL

- b. In the **Provide an Amazon API Gateway URL** text box, paste the **Invoke URL** address of the API Gateway endpoint that you created in step 3 of this procedure.
- c. For **Role**, choose the IAM role that was created by the Amazon CloudFormation template. This role allows Transfer Family to invoke your API gateway method.

The invocation role contains the Amazon CloudFormation stack name that you selected for the stack that you created in step 1. It has the following format: *CloudFormation-stack-name-TransferIdentityProviderRole-ABC123DEF456GHI*.

- d. Fill in the remaining boxes, and then choose **Create server**. For details on the remaining steps for creating a server, see [Configuring an SFTP, FTPS, or FTP server endpoint](#).

Implementing your API Gateway method

To create a custom identity provider for Transfer Family, your API Gateway method must implement a single method that has a resource path of `/servers/serverId/users/username/`

config. The *serverId* and *username* values come from the RESTful resource path. Also, add *sourceIp* and *protocol* as **URL Query String Parameters** in the **Method Request**, as shown in the following image.

Resources > Transfer Custom Identity Provide... > Resources > /servers/{serverId}/users/{username}/config > GET

Resources Actions

Method Execution /servers/{serverId}/users/{username}/config - GET - Metho...

Provide information about this method's authorization settings and the parameters it can receive.

Settings

Authorization Amazon IAM

Request Validator NONE

API Key Required false

Request Paths

URL Query String Parameters

Name	Required
protocol	<input type="checkbox"/>
sourceIp	<input type="checkbox"/>

Add query string

HTTP Request Headers

Name	Required
Password	<input type="checkbox"/>

Note

The username must be a minimum of 3 and a maximum of 100 characters. You can use the following characters in the username: a–z, A–Z, 0–9, underscore '_', hyphen '-', period '.' and at sign '@'. The username can't start with a hyphen '-', period '.' or at sign '@'.

If Transfer Family attempts password authentication for your user, the service supplies a `Password:` header field. In the absence of a `Password:` header, Transfer Family attempts public key authentication to authenticate your user.

When you are using an identity provider to authenticate and authorize end users, in addition to validating their credentials, you can allow or deny access requests based on the IP addresses of the clients used by your end users. You can use this feature to ensure that data stored in your S3 buckets or your Amazon EFS file system can be accessed over the supported protocols only from IP addresses that you have specified as trusted. To enable this feature, you must include `sourceIp` in the Query string.

If you have multiple protocols enabled for your server and want to provide access using the same username over multiple protocols, you can do so as long as the credentials specific to each protocol have been set up in your identity provider. To enable this feature, you must include the *protocol* value in the RESTful resource path.

Your API Gateway method should always return HTTP status code 200. Any other HTTP status code means that there was an error accessing the API.

Amazon S3 example response

The example response body is a JSON document of the following form for Amazon S3.

```
{
  "Role": "IAM role with configured S3 permissions",
  "PublicKeys": [
    "ssh-rsa public-key1",
    "ssh-rsa public-key2"
  ],
  "Policy": "STS Assume role session policy",
  "HomeDirectory": "/amzn-s3-demo-bucket/path/to/home/directory"
}
```

Note

The policy is escaped JSON as a string. For example:

```
"Policy":
"{
  \"Version\": \"2012-10-17\",
  \"Statement\":
  [
    {\"Condition\":
      {\"StringLike\":
        {\"s3:prefix\":
```

```

        [{"user/*\", \"user/\"}]},
    \"Resource\": \"arn:aws-cn:s3:::amzn-s3-demo-bucket\",
    \"Action\": \"s3:ListBucket\",
    \"Effect\": \"Allow\",
    \"Sid\": \"ListHomeDir\",
    {\"Resource\": \"arn:aws-cn:s3:::*\",
      \"Action\": [\"s3:PutObject\",
        \"s3:GetObject\",
        \"s3:DeleteObjectVersion\",
        \"s3:DeleteObject\",
        \"s3:GetObjectVersion\",
        \"s3:GetObjectACL\",
        \"s3:PutObjectACL\"],
      \"Effect\": \"Allow\",
      \"Sid\": \"HomeDirObjectAccess\"}]
  }"

```

The following example response shows that a user has a logical home directory type.

```

{
  "Role": "arn:aws-cn:iam::123456789012:role/transfer-access-role-s3",
  "HomeDirectoryType": "LOGICAL",
  "HomeDirectoryDetails": "[{\"Entry\": \"/\", \"Target\": \"/amzn-s3-demo-bucket1\"}]",
  "PublicKeys": ["" ]
}

```

Amazon EFS example response

The example response body is a JSON document of the following form for Amazon EFS.

```

{
  "Role": "IAM role with configured EFS permissions",
  "PublicKeys": [
    "ssh-rsa public-key1",
    "ssh-rsa public-key2"
  ],
  "PosixProfile": {
    "Uid": "POSIX user ID",
    "Gid": "POSIX group ID",
    "SecondaryGids": [Optional list of secondary Group IDs],
  },
}

```

```
"HomeDirectory": "/fs-id/path/to/home/directory"
}
```

The Role field shows that successful authentication occurred. When doing password authentication (when you supply a Password: header), you don't need to provide SSH public keys. If a user can't be authenticated, for example, if the password is incorrect, your method should return a response without Role set. An example of such a response is an empty JSON object.

The following example response shows a user that has a logical home directory type.

```
{
  "Role": "arn:aws-cn:iam::123456789012:role/transfer-access-role-efs",
  "HomeDirectoryType": "LOGICAL",
  "HomeDirectoryDetails": "[{\"Entry\": \"^\", \"Target\": \"/faa1a123\"}]",
  "PublicKeys": [""],
  "PosixProfile": {\"Uid\": 65534, \"Gid\": 65534}
}
```

You can include user policies in the Lambda function in JSON format. For more information about configuring user policies in Transfer Family, see [Managing access controls](#).

Default Lambda function

To implement different authentication strategies, edit the Lambda function that your gateway uses. To help you meet your application's needs, you can use the following example Lambda functions in Node.js. For more information about Lambda, see the [Amazon Lambda Developer Guide](#) or [Building Lambda functions with Node.js](#).

The following example Lambda function takes your username, password (if you're performing password authentication), server ID, protocol, and client IP address. You can use a combination of these inputs to look up your identity provider and determine if the login should be accepted.

Note

If you have multiple protocols enabled for your server and want to provide access using the same username over multiple protocols, you can do so as long as the credentials specific to the protocol have been set up in your identity provider.

For File Transfer Protocol (FTP), we recommend maintaining separate credentials from Secure Shell (SSH) File Transfer Protocol (SFTP) and File Transfer Protocol over SSL (FTPS).

We recommend maintaining separate credentials for FTP because, unlike SFTP and FTPS, FTP transmits credentials in clear text. By isolating FTP credentials from SFTP or FTPS, if FTP credentials are shared or exposed, your workloads using SFTP or FTPS remain secure.

This example function returns the role and logical home directory details, along with the public keys (if it performs public key authentication).

When you create service-managed users, you set their home directory, either logical or physical. Similarly, we need the Lambda function results to convey the desired user physical or logical directory structure. The parameters you set depend on the value for the [HomeDirectoryType](#) field.

- `HomeDirectoryType` set to `PATH` – the `HomeDirectory` field must then be an absolute Amazon S3 bucket prefix or Amazon EFS absolute path that is visible to your users.
- `HomeDirectoryType` set to `LOGICAL` – Do *not* set a `HomeDirectory` field. Instead, we set a `HomeDirectoryDetails` field that provides the desired Entry/Target mappings, similar to the described values in the [HomeDirectoryDetails](#) parameter for service-managed users.

The example functions are listed in [Example Lambda functions](#).

Lambda function for use with Amazon Secrets Manager

To use Amazon Secrets Manager as your identity provider, you can work with the Lambda function in the sample Amazon CloudFormation template. The Lambda function queries the Secrets Manager service with your credentials and, if successful, returns a designated secret. For more information about Secrets Manager, see the [Amazon Secrets Manager User Guide](#).

To download a sample Amazon CloudFormation template that uses this Lambda function, go to the [Amazon S3 bucket provided by Amazon Transfer Family](#).

Improvements to the Amazon CloudFormation templates

Improvements to the API Gateway interface have been made to the published CloudFormation templates. The templates now use BASE64-encoded passwords with the API Gateway. Your existing deployments continue to work without this enhancement, but don't allow for passwords with characters outside the basic US-ASCII character set.

The changes in the template that enable this capability are as follows:

- The `GetUserConfigRequest` `AWS::ApiGateway::Method` resource has to have this `RequestTemplates` code (the line in italics is the updated line)

```
RequestTemplates:
  application/json: |
    {
      "username": "$util.urlDecode($input.params('username'))",
      "password":
"$util.escapeJavaScript($util.base64Decode($input.params('PasswordBase64'))).replaceAll('\\"',"'")",
      "protocol": "$input.params('protocol')",
      "serverId": "$input.params('serverId')",
      "sourceIp": "$input.params('sourceIp')"
    }
  }
```

- The `RequestParameters` for the `GetUserConfig` resource must change to use the `PasswordBase64` header (the line in italics is the updated line):

```
RequestParameters:
  method.request.header.PasswordBase64: false
  method.request.querystring.protocol: false
  method.request.querystring.sourceIp: false
```

To check if the template for your stack is the latest

1. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
2. From the list of stacks, choose your stack.
3. From the details panel, choose the **Template** tab.
4. Look for the following:
 - Search for `RequestTemplates`, and make sure you have this line:

```
"password":
  "$util.escapeJavaScript($util.base64Decode($input.params('PasswordBase64'))).replaceAll('\\"',"'")",
```

- Search for `RequestParameters`, and make sure you have this line:

```
method.request.header.PasswordBase64: false
```

If you don't see the updated lines, edit your stack. For details on how to update your Amazon CloudFormation stack, see [Modifying a stack template](#) in the *Amazon CloudFormation; User Guide*.

Using multiple authentication methods

The Transfer Family server controls the AND logic when you use multiple authentication methods. Transfer Family treats this as two separate requests to your custom identity provider: however, their effect is combined.

Both requests must return successfully with the correct response to allow the authentication to complete. Transfer Family requires the two responses to be complete, meaning they contain all of the required elements (role, home directory, policy and the POSIX profile if you're using Amazon EFS for storage). Transfer Family also requires that the password response must not include public keys.

The public key request must have a separate response from the identity provider. That behavior is unchanged when using **Password OR Key** or **Password AND Key**.

The SSH/SFTP protocol challenges the software client first with a public key authentication, then requests a password authentication. This operation mandates both are successful before the user is allowed to complete the authentication.

For custom identity provider options, you can specify any of the following options for how to authenticate.

- **Password OR Key** – users can authenticate with either their password or their key. This is the default value.
- **Password ONLY** – users must provide their password to connect.
- **Key ONLY** – users must provide their private key to connect.
- **Password AND Key** – users must provide both their private key and their password to connect. The server checks the key first, and then if the key is valid, the system prompts for a password. If the private key provided does not match the public key that is stored, authentication fails.


Using Amazon Directory Service for Microsoft Active Directory

You can use Amazon Transfer Family to authenticate your file transfer end users using Amazon Directory Service for Microsoft Active Directory. It enables seamless migration of file transfer

workflows that rely on Active Directory authentication without changing end users' credentials or needing a custom authorizer.

With Amazon Managed Microsoft AD, you can securely provide Amazon Directory Service users and groups access over SFTP, FTPS, and FTP for data stored in Amazon Simple Storage Service (Amazon S3) or Amazon Elastic File System (Amazon EFS). If you use Active Directory to store your users' credentials, you now have an easier way to enable file transfers for these users.

You can provide access to Active Directory groups in Amazon Managed Microsoft AD in your on-premises environment or in the Amazon Cloud using Active Directory connectors. You can give users that are already configured in your Microsoft Windows environment, either in the Amazon Cloud or in their on-premises network, access to an Amazon Transfer Family server that uses Amazon Managed Microsoft AD for identity. The Amazon storage blog contains a post that details a solution for using Active Directory with Transfer Family: [Simplify Active Directory authentication with a custom identity provider for Amazon Transfer Family](#).

 **Note**

- Amazon Transfer Family does not support Simple AD.
- Transfer Family does not support cross-region Active Directory configurations: we only support Active Directory integrations that are in the same region as that of the Transfer Family server.
- Transfer Family does not support using either Amazon Managed Microsoft AD or AD Connector to enable multi-factor authentication (MFA) for your existing RADIUS-based MFA infrastructure.
- Amazon Transfer Family does not support replicated regions of Managed Active Directory.

To use Amazon Managed Microsoft AD, you must perform the following steps:

1. Create one or more Amazon Managed Microsoft AD directories using the Amazon Directory Service console.
2. Use the Transfer Family console to create a server that uses Amazon Managed Microsoft AD as its identity provider.
3. Set up Amazon Directory using an Active Directory Connector.
4. Add access from one or more of your Amazon Directory Service groups.

5. Although not required, we recommend that you test and verify user access.

Topics

- [Before you start using Amazon Directory Service for Microsoft Active Directory](#)
- [Working with Active Directory realms](#)
- [Choosing Amazon Managed Microsoft AD as your identity provider](#)
- [Connecting to on-prem Microsoft Active Directory](#)
- [Granting access to groups](#)
- [Testing users](#)
- [Deleting server access for a group](#)
- [Connecting to the server using SSH \(Secure Shell\)](#)
- [Connecting Amazon Transfer Family to a self-managed Active Directory using forests and trusts](#)

Before you start using Amazon Directory Service for Microsoft Active Directory

Note

Amazon Transfer Family has a default limit of 100 Active Directory groups per server. If your use case requires more than 100 groups, consider using a custom identity provider solution as described in [Simplify Active Directory authentication with a custom identity provider for Amazon Transfer Family](#).

Provide a unique identifier for your AD groups

Before you can use Amazon Managed Microsoft AD, you must provide a unique identifier for each group in your Microsoft AD directory. You can use the security identifier (SID) for each group to do this. The users of the group that you associate have access to your Amazon S3 or Amazon EFS resources over the enabled protocols using Amazon Transfer Family.

Use the following Windows PowerShell command to retrieve the SID for a group, replacing *YourGroupName* with the name of the group.

```
Get-ADGroup -Filter {samAccountName -like "YourGroupName*"} -Properties * | Select SamAccountName, ObjectSid
```

Note

If you are using Amazon Directory Service as your identity provider, and if `userPrincipalName` and `SamAccountName` have different values, Amazon Transfer Family accepts the value in `SamAccountName`. Transfer Family does not accept the value specified in `userPrincipalName`.

Add Amazon Directory Service permissions to your role

You also need Amazon Directory Service API permissions to use Amazon Directory Service as your identity provider. The following permissions are required or suggested:

- `ds:DescribeDirectories` is required for Transfer Family to look up the directory
- `ds:AuthorizeApplication` is required to add authorization for Transfer Family
- `ds:UnauthorizeApplication` is suggested to remove any resources that are provisionally created, in case something goes wrong during the server creation process

Add these permissions to the role you are using for creating your Transfer Family servers. For more details on these permissions, see [Amazon Directory Service API permissions: Actions, resources, and conditions reference](#).

Working with Active Directory realms

When you are considering how to have your Active Directory users access Amazon Transfer Family servers, keep in mind the user's realm, and their group's realm. Ideally, the user's realm and their group's realm should match. That is, both the user and the group are in the default realm, or both are in the trusted realm. If this is not the case, the user cannot be authenticated by Transfer Family.

You can test the user to ensure the configuration is correct. For details, see [Testing users](#). If there is a problem with the user/group realm, you receive the error, No associated access found for user's groups.


Choosing Amazon Managed Microsoft AD as your identity provider

This section describes how to use Amazon Directory Service for Microsoft Active Directory with a server.

To use Amazon Managed Microsoft AD with Transfer Family

1. Sign in to the Amazon Web Services Management Console and open the Amazon Directory Service console at <https://console.amazonaws.cn/directoryservicev2/>.

Use the Amazon Directory Service console to configure one or more managed directories. For more information, see [Amazon Managed Microsoft AD](#) in the *Amazon Directory Service Admin Guide*.

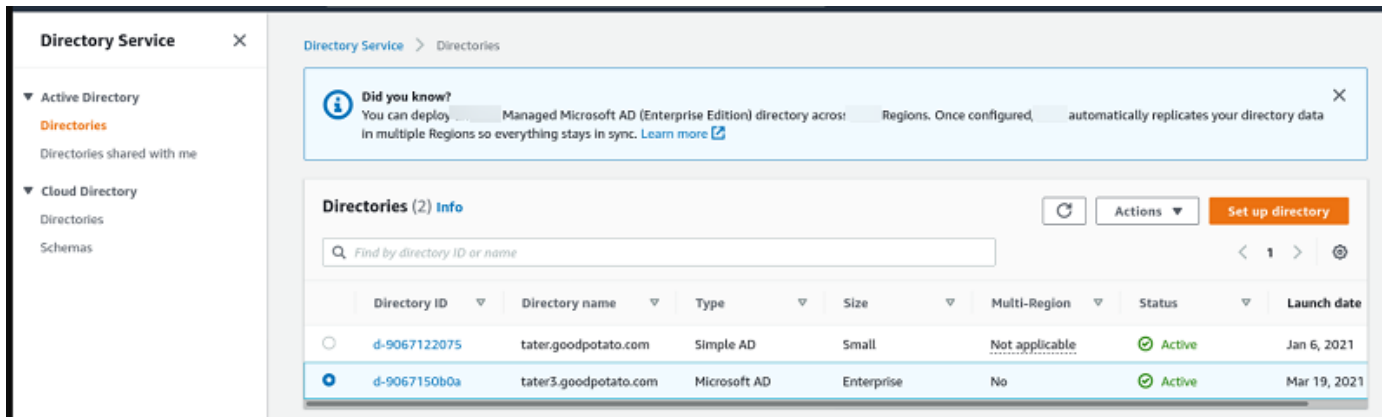

2. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>, and choose **Create server**.
3. On the **Choose protocols** page, choose one or more protocols from the list.

Note

If you select **FTPS**, you must provide the Amazon Certificate Manager certificate.

4. For **Choose an identity provider**, choose **Amazon Directory Service**.

Choose an identity provider

Identity provider

Identity provider type
An identity provider manages user access for authentication and authorization

Service managed
Create and manage users within the service

Directory
Service Info
Enable users in Managed AD or use your own self-managed AD in your on-premises environment or in

Custom Identity Provider
Provider Info
Manage users by integrating an identity provider of your choice

Directory

TATER3

Cancel Previous **Next**

5. The **Directory** list contains all the managed directories that you have configured. Choose a directory from the list, and choose **Next**.

Note

- Cross-Account and Shared directories are not supported for Amazon Managed Microsoft AD.
- To set up a server with Directory Service as your identity provider, you need to add some Amazon Directory Service permissions. For details, see [Before you start using Amazon Directory Service for Microsoft Active Directory](#).

6. To finish creating the server, use one of the following procedures:
- [Create an SFTP-enabled server](#)
 - [Create an FTPS-enabled server](#)
 - [Create an FTP-enabled server](#)

In those procedures, continue with the step that follows choosing an identity provider.

⚠ Important

You can't delete a Microsoft AD directory in Amazon Directory Service if you used it in a Transfer Family server. You must delete the server first, and then you can delete the directory.

Connecting to on-prem Microsoft Active Directory

This section describes how to set up an Amazon Directory using an AD Connector

To set up your Amazon Directory using AD Connector

1. Open the [Directory Service](#) console and select **Directories**.
2. Select **Set up directory**.
3. For directory type, choose **AD Connector**.
4. Select a directory size, select **Next**, then select your VPC and Subnets.
5. Select **Next**, then fill in the fields as follows:
 - **Directory DNS name:** enter the domain name you are using for your Microsoft Active Directory.
 - **DNS IP addresses:** enter you Microsoft Active Directory IP addresses.
 - **Server account username and password:** enter the details for the service account to use.
6. Complete the screens to create the directory service.

The next step is to create a Transfer Family server with the SFTP protocol, and the identity provider type of **Amazon Directory Service**. From **Directory** drop down list, select the directory you added in the previous procedure.

Granting access to groups

After you create the server, you must choose which groups in the directory should have access to upload and download files over the enabled protocols using Amazon Transfer Family. You do this by creating an *access*.

Note

Amazon Transfer Family has a default limit of 100 Active Directory groups per server. If your use case requires more than 100 groups, consider using a custom identity provider solution as described in [Simplify Active Directory authentication with a custom identity provider for Amazon Transfer Family](#).

Note

Users must belong *directly* to the group to which you are granting access. For example, assume that Bob is a user and belongs to groupA, and groupA itself is included in groupB.

- If you grant access to groupA, Bob is granted access.
- If you grant access to groupB (and not to groupA), Bob does not have access.

To grant access to a group

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. Navigate to your server details page.
3. In the **Accesses** section, choose **Add access**.
4. Enter the SID for the Amazon Managed Microsoft AD directory that you want to have access to this server.

Note

For information about how to find the SID for your group, see [the section called "Before you start using Amazon Directory Service for Microsoft Active Directory"](#).

5. For **Access**, choose an Amazon Identity and Access Management (IAM) role for the group.
6. In the **Policy** section, choose a policy. The default setting is **None**.
7. For **Home directory**, choose an Amazon S3 bucket that corresponds to the group's home directory.

Note

You can limit the portions of the bucket that users see by creating a session policy. For example, to limit users to their own folder under the `/filetest` directory, enter the following text in the box.

```
/filetest/${transfer:UserName}
```

To learn more about creating a session policy, see [Creating a session policy for an Amazon S3 bucket](#).

8. Choose **Add** to create the association.
9. Choose your server.
10. Choose **Add access**.
 - Enter the SID for the group.

Note

For information about how to find the SID, see [the section called “Before you start using Amazon Directory Service for Microsoft Active Directory”](#).

11. Choose **Add access**.

In the **Accesses** section, the accesses for the server are listed.

The screenshot displays the Amazon Transfer Family console interface. At the top, the 'Endpoint configuration' section shows the following details:

Availability Zone	Subnet ID	Private IPv4 Address
us-east-1a	subnet- [redacted]	172.31.80.36

Below this, the 'Accesses (1)' section features a search bar, an 'Actions' dropdown menu, and an 'Associate access' button. A table lists the access details:

<input checked="" type="checkbox"/>	External Id	Home directory	Role
<input checked="" type="checkbox"/>	S- [redacted]	/padbucket3	ADGuy_S3_And_EFS [link]

The 'Additional details' section includes an 'Edit' button and provides information on logging and security:

- Logging role: [Info](#)
- Server activity not logged to Amazon CloudWatch
- Server host key: [Info](#)
- Security Policy: [Info](#)
- TransferSecurityPolicy-2018-11
- Domain: Amazon S3

Testing users

You can test whether a user has access to the Amazon Managed Microsoft AD directory for your server.

Note

A user must be in exactly one group (an external ID) that is listed in the **Access** section of the **Endpoint configuration** page. If the user is in no groups, or is in more than a single group, that user is not granted access.

To test whether a specific user has access

1. On the server details page, choose **Actions**, and then choose **Test**.
2. For **Identity provider testing**, enter the sign-in credentials for a user that is in one of the groups that has access.
3. Choose **Test**.

You see a successful identity provider test, showing that the selected user has been granted access to the server.

Identity provider testing

User configuration [Info](#)

Username Password

Response

```
{
  "Response": "
  {\"homeDirectory\": \"\", \"path\": \"\", \"homeDirectoryDetails\": null, \"homeDirectoryType\": \"PATH\", \"posixProfile\":
  null, \"publicKeys\": null, \"role\": \"arn:aws:iam::195886157073:role/WDGuy_SS_Ard_EFS\", \"policy\": null, \"userName\": \"transferuser1\", \"identityProviderType\": null, \"userConfigMessage\": null}",
  "StatusCode": 200,
  "Message": ""
}
```

Cancel

If the user belongs to more than one group that has access, you receive the following response.

```
"Response": "",
"StatusCode": 200,
"Message": "More than one associated access found for user's groups."
```

Deleting server access for a group

To delete server access for a group

1. On the server details page, choose **Actions**, and then choose **Delete Access**.
2. In the dialog box, confirm that you want to remove access for this group.

When you return to the server details page, you see that the access for this group is no longer listed.

Connecting to the server using SSH (Secure Shell)

After you configure your server and users, you can connect to the server using SSH and use the fully qualified username for a user that has access.

```
sftp user@active-directory-domain@vpc-endpoint
```

For example: `transferuserexample@mycompany.com@vpce-0123456abcdef-789xyz.vpc-svc-987654zyxabc.us-east-1.vpce.amazonaws.com`.

This format targets the search of the federation, limiting the search of a potentially large Active Directory.

Note

You can specify the simple username. However, in this case, the Active Directory code has to search all the directories in the federation. This might limit the search, and authentication might fail even if the user should have access.

After authenticating, the user is located in the home directory that you specified when you configured the user.

Connecting Amazon Transfer Family to a self-managed Active Directory using forests and trusts

Users in your self-managed Active Directory (AD) can also use Amazon IAM Identity Center for single sign-on access to Amazon Web Services accounts and Transfer Family servers. To do that, Amazon Directory Service has the following options available:

- One-way forest trust (outgoing from Amazon Managed Microsoft AD and incoming for on-premises Active Directory) works only for the root domain.
- For child domains, you can use either of the following:
 - Use two-way trust between Amazon Managed Microsoft AD and on-premises Active Directory
 - Use one-way external trust to each child domain.

When connecting to the server using a trusted domain, the user needs to specify the trusted domain, for example `transferuserexample@mycompany.com`.

Using Amazon Directory Service for Entra ID Domain Services

Note the following:

- To take advantage of your existing Active Directory forest for your SFTP Transfer needs, you can use [Active Directory Connector](#).
- If you want the benefits of Active Directory and high availability in a fully managed service, you can use Amazon Directory Service for Microsoft Active Directory. For details, see [Using Amazon Directory Service for Microsoft Active Directory](#).

This topic describes how to use an Active Directory Connector and [Entra ID \(formerly Azure AD\) Domain Services](#) to authenticate SFTP Transfer users with [Entra ID](#).

Topics

- [Before you start using Amazon Directory Service for Entra ID Domain Services](#)
- [Step 1: Adding Entra ID Domain Services](#)
- [Step 2: Creating a service account](#)
- [Step 3: Setting up Amazon Directory using AD Connector](#)
- [Step 4: Setting up Amazon Transfer Family server](#)
- [Step 5: Granting access to groups](#)
- [Step 6: Testing users](#)

Before you start using Amazon Directory Service for Entra ID Domain Services

Note

Amazon Transfer Family has a default limit of 100 Active Directory groups per server. If your use case requires more than 100 groups, consider using a custom identity provider solution as described in [Simplify Active Directory authentication with a custom identity provider for Amazon Transfer Family](#).


For Amazon, you need the following:

- A virtual private cloud (VPC) in an Amazon region where you are using your Transfer Family servers

- At least two private subnets in your VPC
- The VPC must have internet connectivity
- A customer gateway and Virtual private gateway for site-to-site VPN connection with Microsoft Entra

For Microsoft Entra, you need the following:


- An Entra ID and Active directory domain service
- An Entra resource group
- An Entra virtual network
- VPN connectivity between your Amazon VPC and your Entra resource group

 **Note**

This can be through native IPSEC tunnels or using VPN appliances. In this topic, we use IPSEC tunnels between an Entra Virtual network gateway and local network gateway. The tunnels must be configured to allow traffic between your Entra Domain Service endpoints and the subnets that house your Amazon VPC.

- A customer gateway and Virtual private gateway for site-to-site VPN connection with Microsoft Entra

The following diagram shows the configuration needed before you begin.

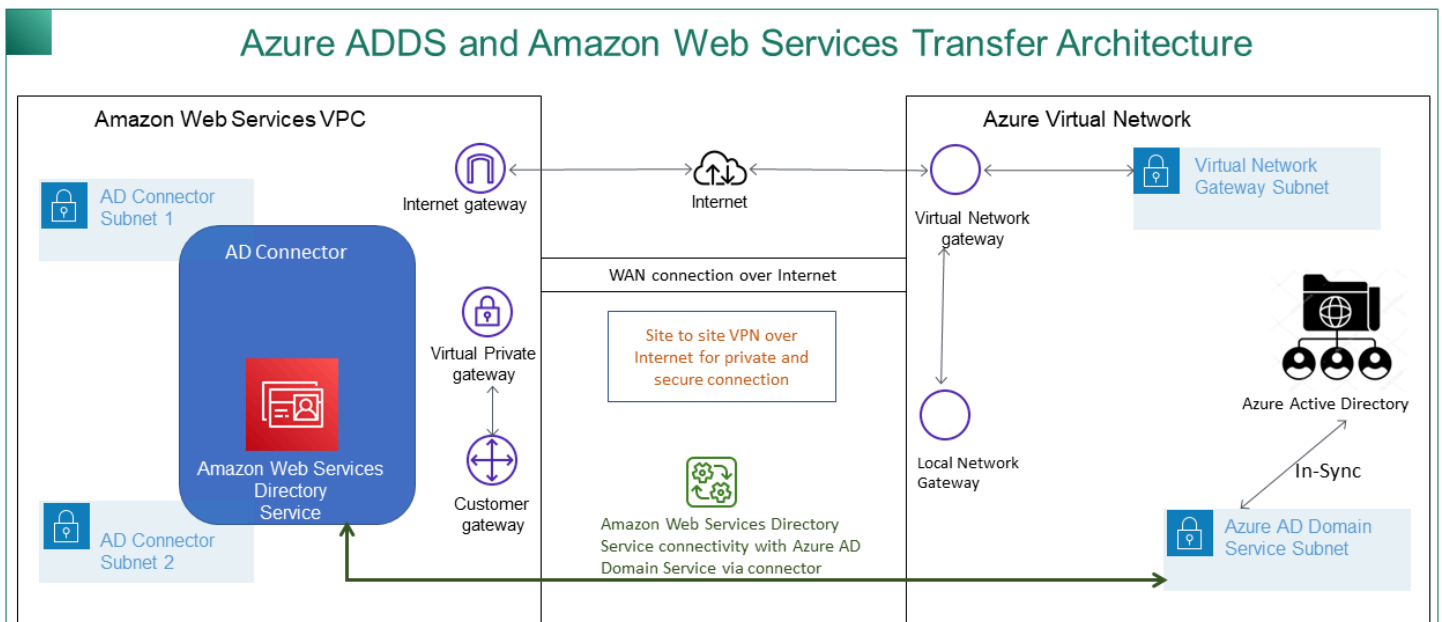

Step 1: Adding Entra ID Domain Services

Entra ID does not support Domain joining instances by default. To perform actions like Domain Join, and to use tools such as Group Policy, administrators must enable Entra ID Domain Services. If you have not already added Entra DS, or your existing implementation is not associated with the domain that you want your SFTP Transfer server to use, you must add a new instance.

For information about enabling Entra ID Domain Services, see [Tutorial: Create and configure a Microsoft Entra Domain Services managed domain](#).

Note

When you enable Entra DS, make sure it is configured for the resource group and the Entra domain to which you are connecting your SFTP Transfer server.

bob.us
Azure AD Domain Services

Search (Cmd+/) << Refresh Delete

Overview
Activity log
Access control (IAM)
Tags
Settings

Configuration issues for your managed domain were detected. Run configuration diagnostics

bob.us Running
[View health](#)

Step 2: Creating a service account

Entra must have one service account that is part of an Admin group in Entra DS. This account is used with the Amazon Active Directory connector. Make sure this account is in sync with Entra DS.

Home > Default Directory > Users > bobatusa

bobatusa | Profile
User

Edit Reset password Revoke sessions Delete Refresh Got feedback?

Diagnose and solve problems

Manage

- Profile
- Assigned roles
- Administrative units
- Groups
- Applications
- Licenses
- Devices
- Azure role assignments
- Authentication methods

Activity

- Sign-in logs
- Audit logs

bobatusa
bobsmith@xyz.com

User Sign-ins Group memberships: 2

Date	Sign-ins
Oct 10	0
Oct 17	0
Oct 24	0
Oct 31	1

Creation time
10/6/2021, 1:32:27 AM

Identity

Name	First name	Last name
bobatusa	Bob	Smith
User Principal Name	User type	
bobsmith@xyz.com	Member	

Tip

Multi-factor authentication for Entra ID is not supported for Transfer Family servers that use the SFTP protocol. The Transfer Family server cannot provide the MFA token after a user authenticates to SFTP. Make sure to disable MFA before you attempt to connect.

multi-factor authentication
users service settings

Note: only users licensed to use Microsoft Online Services are eligible for Multi-Factor Authentication. [Learn more about how to license other users.](#)
Before you begin, take a look at the [multi-factor auth deployment guide](#).

View:

<input type="checkbox"/>	DISPLAY NAME ^	USER NAME	MULTI-FACTOR AUTH STATUS
<input type="checkbox"/>	Christopher	admin@christopher[REDACTED].com	Disabled
<input type="checkbox"/>	Robert	test@christopher[REDACTED].com	Disabled

Select a user

Step 3: Setting up Amazon Directory using AD Connector

After you have configured Entra DS, and created a service account with IPSEC VPN tunnels between your Amazon VPC and Entra Virtual network, you can test the connectivity by pinging the Entra DS DNS IP address from any Amazon EC2 instance.

After you verify the connection is active, you can continue below.

To set up your Amazon Directory using AD Connector

1. Open the [Directory Service](#) console and select **Directories**.
2. Select **Set up directory**.
3. For directory type, choose **AD Connector**.
4. Select a directory size, select **Next**, then select your VPC and Subnets.
5. Select **Next**, then fill in the fields as follows:
 - **Directory DNS name:** enter the domain name you are using for your Entra DS.
 - **DNS IP addresses:** enter your Entra DS IP addresses.
 - **Server account username and password:** enter the details for the service account you created in *Step 2: Create a service account*.

6. Complete the screens to create the directory service.

Now the directory status should be **Active**, and it is ready to be used with an SFTP Transfer server.

Directory Service > Directories

Did you know?
 You can deploy an Managed Microsoft AD (Enterprise Edition) directory across Regions. Once configured, automatically replicates your directory data in multiple Regions so everything stays in sync. [Learn more](#)

Directories (1) [Info](#) Refresh Actions **Set up directory**

Find by directory ID or name

Directory ID	Directory name	Type	Size	Multi-Region	Status	Launch date
<input type="radio"/> d-906752c0d7	sumit.gq	AD Connector	Small	Not applicable	✔ Active	Nov 3, 2021

Step 4: Setting up Amazon Transfer Family server

Create a Transfer Family server with the SFTP protocol, and the identity provider type of **Amazon Directory Service**. From **Directory** drop down list, select the directory you added in *Step 3: Setup Amazon Directory using AD Connector*.

Note

You can't delete a Microsoft AD directory in Amazon Directory Service if you used it in a Transfer Family server. You must delete the server first, and then you can delete the directory.

Step 5: Granting access to groups

After you create the server, you must choose which groups in the directory should have access to upload and download files over the enabled protocols using Amazon Transfer Family. You do this by creating an *access*.

Note


Users must belong *directly* to the group to which you are granting access. For example, assume that Bob is a user and belongs to groupA, and groupA itself is included in groupB.

- If you grant access to groupA, Bob is granted access.
- If you grant access to groupB (and not to groupA), Bob does not have access.

In order to grant access you need to retrieve the SID for the group.

Use the following Windows PowerShell command to retrieve the SID for a group, replacing *YourGroupName* with the name of the group.

```
Get-ADGroup -Filter {samAccountName -like "YourGroupName*"} -Properties * | Select SamAccountName, ObjectSid
```

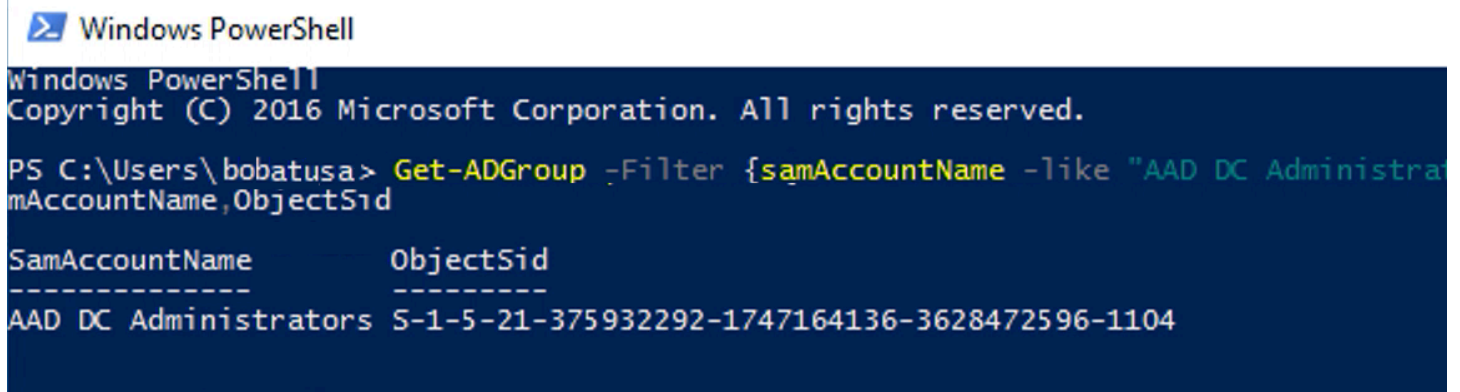

```
Windows PowerShell
Copyright (C) 2016 Microsoft Corporation. All rights reserved.

PS C:\Users\bobatusa> Get-ADGroup -Filter {samAccountName -like "AAD DC Administrators"} -Properties * | Select SamAccountName, ObjectSid

SamAccountName      ObjectSid
-----
AAD DC Administrators S-1-5-21-375932292-1747164136-3628472596-1104
```

Grant access to groups

1. Open <https://console.amazonaws.cn/transfer/>.
2. Navigate to your server details page and in the **Accesses** section, choose **Add access**.
3. Enter the SID you received from the output of the previous procedure.
4. For **Access**, choose an Amazon Identity and Access Management role for the group.
5. In the **Policy** section, choose a policy. The default value is **None**.
6. For **Home directory**, choose an Amazon S3 bucket that corresponds to the group's home directory.
7. Choose **Add** to create the association.

The details from your Transfer server should look similar to the following:

Protocols Edit

Protocols over which clients can connect to your server's endpoint

- SFTP

Identity provider Edit

Identity provider type
Amazon Directory Service

Directory ID
d-123456789a

Accesses (1) Actions Add access

	External Id	Home directory	Role
<input type="checkbox"/>	S-1-5-21-375932292-1747164136-3628472596-1104	/s3/1111111111	sftp-user-role ↗

Step 6: Testing users

You can test ([Testing users](#)) whether a user has access to the Amazon Managed Microsoft AD directory for your server. A user must be in exactly one group (an external ID) that is listed in the **Access** section of the **Endpoint configuration** page. If the user is in no groups, or is in more than a single group, that user is not granted access.

Using logical directories to simplify your Transfer Family directory structures

To simplify your Amazon Transfer Family server directory structure, you can use logical directories. With logical directories, you can construct a virtual directory structure that uses user-friendly names that your users navigate when they connect to your Amazon S3 bucket or Amazon EFS file system. When you use logical directories, you can avoid disclosing absolute directory paths, Amazon S3 bucket names, and EFS file system names to your end users.

Note

You should use session policies so that your end users can only perform operations that you allow them to perform.

You should use logical directories to create a user-friendly, virtual directory for your end users and abstract away bucket names. Logical directory mappings only allow users to access their designated logical paths and subdirectories, and forbid relative paths that traverse the logical roots.

Transfer Family validates every path that might include relative elements and actively blocks these paths from resolving before we pass these paths to Amazon S3; this prevents your users from moving beyond their logical mappings.

Even though Transfer Family prevents your end users from accessing directories outside of their logical directory, we recommend you also use unique roles or session policies to enforce least privilege at the storage level.

You can use logical directories to set the user's root directory to a desired location within your storage hierarchy, by performing what is known as a **chroot** operation. In this mode, users are not able to navigate to a directory outside of the home or root directory that you've configured for them.

For example, although an Amazon S3 user has been scoped down to access only `/amzn-s3-demo-bucket/home/${transfer:UserName}`, some clients allow users to traverse up a folder to `/amzn-s3-demo-bucket/home`. In this situation, the user lands back on their intended home directory only after logging out of and back in to the Transfer Family server again. Performing a **chroot** operation can prevent this situation from occurring.

You can create your own directory structure across buckets and prefixes. This feature is useful if you have a workflow that is expecting a specific directory structure that you can't replicate through bucket prefixes. You can also link to multiple non-contiguous locations within Amazon S3, similar to creating a symbolic link in a Linux file system where your directory path references a different location in the file system.

Logical directory FILE mappings

The `HomeDirectoryMapEntry` data type now includes a `Type` parameter. Before this parameter existed, you could have created a logical directory mapping where the target was a file. If you have previously created any of these kinds of logical directory mappings, you must explicitly set the `Type` to `FILE`, or these mappings won't work correctly going forward.

One way to do this is to call the `UpdateUser` API, and set the `Type` to `FILE` for the existing mapping.

Rules for using logical directories

Before you build your logical directory mappings, you should understand the following rules:

- When Entry is "/", you can have only one mapping because overlapping paths are not allowed.
- Logical directories support mappings of up to 2.1 MB (for service-managed users, this limit is 2,000 entries). That is, the data structure that contains the mappings has a maximum size of 2.1 MB. If you have a lot of mappings, you can calculate the size of your mappings as follows:
 1. Write out a typical mapping in the format {"Entry": "/*entry-path*", "Target": "/*target-path*"}, where *entry-path* and *target-path* are the actual values that you will use.
 2. Count the characters in that string, then add one (1).
 3. Multiply that number by the approximate number of mappings that you have for your server.

If the number that you estimated in step 3 is less than 2.1 MB, then your mappings are within the acceptable limit.

- Targets can use the `${transfer:UserName}` variable if the bucket or file system path has been parameterized based on the username.
- Targets can be paths in different buckets or file systems, but you must make sure that the mapped Amazon Identity and Access Management (IAM) role (the Role parameter in the response) provides access to those buckets or file systems.
- Don't specify the HomeDirectory parameter, because this value is implied by the Entry Target pairs when you're using the LOGICAL value for the HomeDirectoryType parameter.
- Targets must begin with a forward slash (/) character, but don't use trailing forward slashes (/) when you specify the Target. For example, /amzn-s3-demo-bucket/images is acceptable, but amzn-s3-demo-bucket/images and /amzn-s3-demo-bucket/images/ are not.
- Amazon S3 is an object store, which means that folders are a virtual concept, and there is no actual directory hierarchy. If your application issues a stat operation from a client, everything is classified as a file when you're using Amazon S3 for storage. This behavior is described in [Organizing objects in the Amazon S3 console using folders](#) in the *Amazon Simple Storage Service User Guide*. If your application requires that stat accurately show whether something is a file or folder, you can use Amazon Elastic File System (Amazon EFS) as the storage option for your Transfer Family servers.
- If you're specifying logical directory values for your user, the parameter that you use depends on the type of user:

- For service-managed users, provide logical directory values in `HomeDirectoryMappings`.
- For custom identity provider users, provide logical directory values in `HomeDirectoryDetails`.

Important

Unless you choose to optimize performance for your Amazon S3 directories (when you create or update a server), the root directory must exist on startup. For Amazon S3, this means that you must have already created a zero-byte object ending with a forward slash (/) to create the root folder. Avoiding this issue is a reason to consider optimizing Amazon S3 performance.

Implementing logical directories and `chroot`

To use logical directories and `chroot` features, you must do the following:

Turn on logical directories for each user. Do this by setting the `HomeDirectoryType` parameter to `LOGICAL` when you create or update your user.

```
"HomeDirectoryType": "LOGICAL"
```

`chroot`

For `chroot`, create a directory structure that consists of a single `Entry` and `Target` pairing for each user. The root folder is the `Entry` point, and the `Target` is the location in your bucket or file system to map to.

Example for Amazon S3

```
[{"Entry": "/", "Target": "/amzn-s3-demo-bucket/jane"}]
```

Example for Amazon EFS

```
[{"Entry": "/", "Target": "/fs-faa1a123/jane"}]
```

You can use an absolute path as in the previous example, or you can use a dynamic substitution for the username with `${transfer:UserName}`, as in the following example.

```
[{"Entry": "/", "Target":  
"/amzn-s3-demo-bucket/${transfer:UserName}"}]
```

In the preceding example, the user is locked to their root directory and cannot traverse up higher in the hierarchy.

Virtual directory structure

For a virtual directory structure, you can create multiple Entry Target pairings, with targets anywhere in your S3 buckets or EFS file systems, including across multiple buckets or file systems, as long as the user's IAM role mapping has permissions to access them.

In the following virtual structure example, when the user logs into Amazon SFTP, they are in the root directory with sub-directories of `/pics`, `/doc`, `/reporting`, and `/anotherpath/subpath/financials`.

Note

Unless you choose to optimize performance for your Amazon S3 directories (when you create or update a server), either the user or an administrator needs to create the directories if they don't already exist. Avoiding this issue is a reason to consider optimizing Amazon S3 performance.

For Amazon EFS, you still need the administrator to create the logical mappings or the `/` directory.

```
[  
{"Entry": "/pics", "Target": "/amzn-s3-demo-bucket1/pics"},  
{"Entry": "/doc", "Target": "/amzn-s3-demo-bucket1/anotherpath/docs"},  
{"Entry": "/reporting", "Target": "/amzn-s3-demo-bucket2/Q1"},  
{"Entry": "/anotherpath/subpath/financials", "Target": "/amzn-s3-demo-bucket2/  
financials"}]
```

Note

You can only upload files to the specific folders that you map. This means that in the previous example, you cannot upload to `/anotherpath` or `anotherpath/subpath` directories; only `anotherpath/subpath/financials`. You also cannot map to those paths directly, as overlapping paths are not allowed.

For example, assume that you create the following mappings:

```
{
  "Entry": "/pics",
  "Target": "/amzn-s3-demo-bucket/pics"
},
{
  "Entry": "/doc",
  "Target": "/amzn-s3-demo-bucket/mydocs"
},
{
  "Entry": "/temp",
  "Target": "/amzn-s3-demo-bucket"
}
```

You can only upload files to those buckets. When you first connect through `sftp`, you are dropped into the root directory, `/`. If you attempt to upload a file to that directory, the upload fails. The following commands show an example sequence:

```
sftp> pwd
Remote working directory: /
sftp> put file
Uploading file to /file
remote open("/file"): No such file or directory
```

To upload to any `directory/sub-directory`, you must explicitly map the path to the `sub-directory`.

For more information about configuring logical directories and **chroot** for your users, including an Amazon CloudFormation template that you can download and use, see [Simplify your Amazon SFTP Structure with chroot and logical directories](#) in the Amazon Storage Blog.

Configure logical directories example

In this example, we create a user and assign two logical directories. The following command creates a new user (for an existing Transfer Family server) with logical directories `pics` and `doc`.

```
aws transfer create-user --user-name marymajor-logical --server-id s-11112222333344445
  --role arn:aws:iam::1234abcd5678:role/marymajor-role --home-directory-type LOGICAL \
  --home-directory-mappings "[{"Entry":"\"/pics\"", \"Target\":\"/amzn-s3-demo-bucket1/
pics\"}, {"Entry":"\"/doc\"", \"Target\":\"/amzn-s3-demo-bucket2/test/mydocs\"}]" \
  --ssh-public-key-body file://~/.ssh/id_rsa.pub
```

If **marymajor** is an existing user and her home directory type is `PATH`, you can change it to `LOGICAL` with a similar command as the previous one.

```
aws transfer update-user --user-name marymajor-logical \
  --server-id s-11112222333344445 --role arn:aws:iam::1234abcd5678:role/marymajor-role \
  --home-directory-type LOGICAL --home-directory-mappings "[{"Entry":"\"/pics\"",
\"Target\":\"/amzn-s3-demo-bucket1/pics\"}, \
{"Entry":"\"/doc\"", \"Target\":\"/amzn-s3-demo-bucket2/test/mydocs\"}]"
```

Note the following:

- If the directories `/amzn-s3-demo-bucket1/pics` and `/amzn-s3-demo-bucket2/test/mydocs` don't already exist, the user (or an administrator) needs to create them.
- When **marymajor** connects to the server, and runs the `ls -l` command, Mary sees the following:

```
drwxr--r--  1      -      -          0 Mar 17 15:42 doc
drwxr--r--  1      -      -          0 Mar 17 16:04 pics
```

- **marymajor** cannot create any files or directories at this level. However, within `pics` and `doc`, she can add sub-directories.
- Files that Mary adds to `pics` and `doc` are added to Amazon S3 paths `/amzn-s3-demo-bucket1/pics` and `/amzn-s3-demo-bucket2/test/mydocs` respectively.
- In this example, we specify two different buckets to illustrate that possibility. However, you can use the same bucket for several or all of the logical directories that you specify for the user.

Configure logical directories for Amazon EFS

If your Transfer Family server uses Amazon EFS, the home directory for the user must be created with read and write access before the user can work in their logical home directory. The user cannot create this directory themselves, as they would lack permissions for `mkdir` on their logical home directory.

If the user's home directory does not exist, and they run an `ls` command, the system responds as follows:

```
sftp> ls
remote readdir ("/"): No such file or directory
```

A user with administrative access to the parent directory needs to create the user's logical home directory.

Custom Amazon Lambda response

You can use logical directories with a Lambda function that connects to your custom identity provider. To do so, in your Lambda function, you specify the `HomeDirectoryType` as **LOGICAL**, and add `Entry` and `Target` values for the `HomeDirectoryDetails` parameter. For example:

```
HomeDirectoryType: "LOGICAL"
HomeDirectoryDetails: "[{"Entry": "\", \"Target\": \"/amzn-s3-demo-bucket/
theRealFolder"}]"
```

The following code is an example of a successful response from a custom Lambda authentication call.

```
aws transfer test-identity-provider --server-id s-1234567890abcdef0 --user-name myuser
{
  "Url": "https://a1b2c3d4e5.execute-api.us-east-2.amazonaws.com/prod/servers/
s-1234567890abcdef0/users/myuser/config",
  "Message": "",
  "Response": "{\"Role\": \"arn:aws-cn:iam::123456789012:role/bob-usa-role\",
\"HomeDirectoryType\": \"LOGICAL\", \"HomeDirectoryDetails\": \"[{\\\"Entry\\\": \\\"/
myhome\\\", \\\"Target\\\": \\\"/amzn-s3-demo-bucket/theRealFolder\\\"}]\\\", \"PublicKeys
\": \"[ssh-rsa myrsapubkey]\"",
  "StatusCode": 200
}
```

Note

The "Url" : line is returned only if you are using an API Gateway method as your custom identity provider.

Transfer Family web apps

You can create web apps to enable a simple interface for transferring data to and from Amazon Simple Storage Service (S3) over a web browser. This does not require you to create or provision Amazon Transfer Family servers.

Before the introduction of Transfer Family web apps, end users needed to use a client, custom-built, or a third-party solution to access their data in Amazon S3. This was due to stringent security requirements for customers and partners, and because clients apps are challenging for non-technical users to operate.

With the launch of web apps, you can now extend a branded, secure, and highly available portal for your end users to browse, upload, and download data in Amazon S3. Web apps are natively integrated with Amazon IAM Identity Center and Amazon S3 Access Grants. This means that only your authenticated users can view the data that they're authorized to access. Web apps are built using [Storage Browser for Amazon S3](#) and offer the same end user functionalities in a fully managed offering without having to write code or host your own application.

For more information about the other Amazon Web Services services that you use with Transfer Family web apps, see the following documentation:

- [Managing access with S3 Access Grants in the Amazon Simple Storage Service User Guide](#)
- [Amazon IAM Identity Center User Guide](#)
- [Amazon S3 Access Grants workshop](#)
- [Announcing Amazon Transfer Family web apps for fully managed Amazon S3 file transfers](#)

The following resources are available to help you to get started with Transfer Family web apps.

- The user guide offers a detailed, step-by-step walkthrough of setting up a Transfer Family web app here: [Setting up a Transfer Family web app](#).
- The **Amazon Getting Started Resource Center** offers a tutorial here: [Getting started with Amazon Transfer Family web app](#).
-

Amazon Web Services Regions for Transfer Family web apps

Amazon Transfer Family web apps are available in all the Transfer Family supported regions, as listed in [Amazon Transfer Family service endpoints](#), except for Asia Pacific (Malaysia) and Mexico (Central).


Browser compatibility for Amazon Transfer Family web apps

Transfer Family web apps support the following browsers.

Browser	Version	Compatibility
Microsoft Edge	Latest 3 versions	Compatible
Mozilla Firefox	Latest 3 versions	Compatible
Google Chrome	Latest 3 versions	Compatible
Apple Safari	Latest 3 versions	Compatible

How to create a Transfer Family web app

The following diagram illustrates the Transfer Family web app architecture.

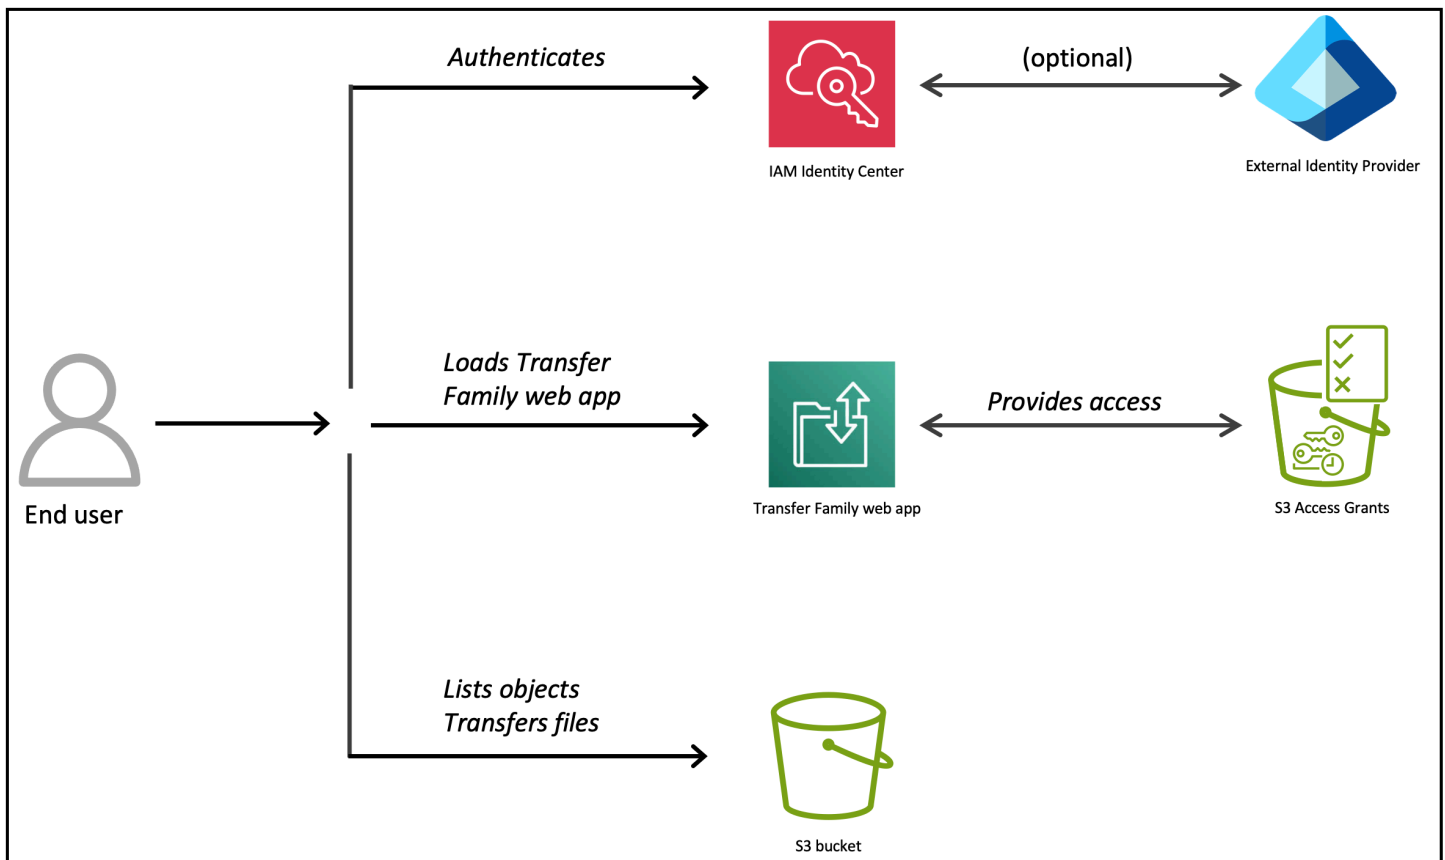

Based on the diagram, you can see that Transfer Family web apps interact with the following Amazon Web Services services:

- Amazon S3 for storage and Amazon S3 Access Grants to acquire session credentials.
- Amazon IAM Identity Center as the federated identity provider.
- Amazon CloudFront if you configure a custom URL for your web app.

Note the following limitations when using web apps.

- Maximum number of search results per query: 10,000
- The Amazon S3 buckets that are used by the Transfer Family web app must be in the same account as the web app itself. Cross-account buckets are not currently supported.
- Maximum search breadth per query: 10,000 searched files
- Maximum upload size per file: 160 GB (149 GiB)
- Maximum size file for copying: 5.36 GB (5 GiB)
- Folder names starting or ending with dots (.) are not supported

Prerequisites

In Amazon Identity and Access Management, configure the necessary roles. Paste in the code blocks that we provide in the instructions. For information about configuring the necessary roles, see [Configure IAM roles for Transfer Family web apps](#).

- Create an identity bearer role.
- Create an IAM role to be used by S3 Access Grants. S3 Access Grants assumes this IAM role to vend temporary credentials to the grantee for the registered Amazon S3 location.

Process to create a Transfer Family web app

To create your web app and get your end users up and running, you perform the following tasks:

1. *Configure IAM Identity Center to act as your federated identity provider.* Perform the following tasks in IAM Identity Center. For more details about configuring IAM Identity Center, see [Configure your identity provider for Transfer Family web apps](#).
 - a. Create an IAM Identity Center instance, if you don't already have one.
 - b. Determine your identity source. It can be the default IAM Identity Center directory or a third-party provider (for example Okta).
 - c. Create or identify the users or groups that will be using your web app.
 - d. If you are using the IAM Identity Center directory for your identity source, note the user or group IDs that you create. You need them later when you create an access grant by using S3 Access Grants.
2. *In Amazon S3, configure Amazon S3 Access Grants.* For more information about S3 Access Grants, see [Configure Amazon S3 Access Grants for Transfer Family web apps](#).
 - Create an S3 Access Grants instance if you don't already have one in that Amazon Web Services Region.
 - Register your location using the IAM role.
 - Create the access grant.
3. *In Transfer Family, perform the following tasks.*
 - a. Create the Transfer Family web app. For more information about how to create the Transfer Family web app, see [Configure a Transfer Family web app](#).

⚠ Important

Set up Cross-origin resource sharing (CORS) for all Amazon S3 buckets that are used by your web app. For information about setting up CORS, see [Set up Cross-origin resource sharing \(CORS\) for your bucket](#).

- b. Assign users or groups to the web app. For more information about how to assign users and groups, see [Assign or add users or groups to Transfer Family web app](#).
- c. (Optional) Update the access endpoint for your web app with a custom URL. For information about creating a custom URL, see [Update your access endpoint with a custom URL](#).
- d. Provide your end users with the access endpoint URL so that they can log in and interact with your web app.

Configure your identity provider for Transfer Family web apps

The following section describes how to configure your identity provider.

To begin, you must have an identity source. You can use an IAM Identity Center directory, Amazon Directory Service for Microsoft Active Directory, or an external identity provider. Transfer Family uses IAM Identity Center as a federated identity provider, which is a system that stores user credentials and authenticates users across multiple organizations.

If you're not using an IAM Identity Center directory as your identity source, see the following topics:

- [Manage an external identity provider](#)
- [Connect to a Microsoft AD directory](#)
- [Organization and account instances of IAM Identity Center](#)
- [IAM Identity Center identity source tutorials](#)


📘 Note

You can only have one identity source in IAM Identity Center, per Amazon Web Services Region.

If you plan to use the IAM Identity Center directory as your identity source, and want a quick setup, you can skip this topic and go to [Create a Transfer Family web app](#) to create an IAM Identity Center instance from the wizard.

To configure Amazon IAM Identity Center for use with Transfer Family web apps

1. Sign in to the Amazon Web Services Management Console and open the Amazon IAM Identity Center console at <https://console.amazonaws.cn/singlesignon/>.
2. You can create and use either an account instance or an organization instance of Amazon IAM Identity Center.
 - For details about account instances, see [Create an account instance of Amazon IAM Identity Center](#). With an account instance of IAM Identity Center, you can deploy supported Amazon managed applications and OpenID Connect (OIDC)-based customer managed applications. Account instances support isolated deployments of applications in a single Amazon Web Services account, leveraging IAM Identity Center workforce identity and access portal features.
 - For details about organization instances, see [Organization instances of IAM Identity Center](#). You can centrally manage the access of users and groups with a single organization instance.
3. On the IAM Identity Center **Settings** page, note down your Instance ARN. You will need this value when you create an **Amazon S3 Access Grant** instance.

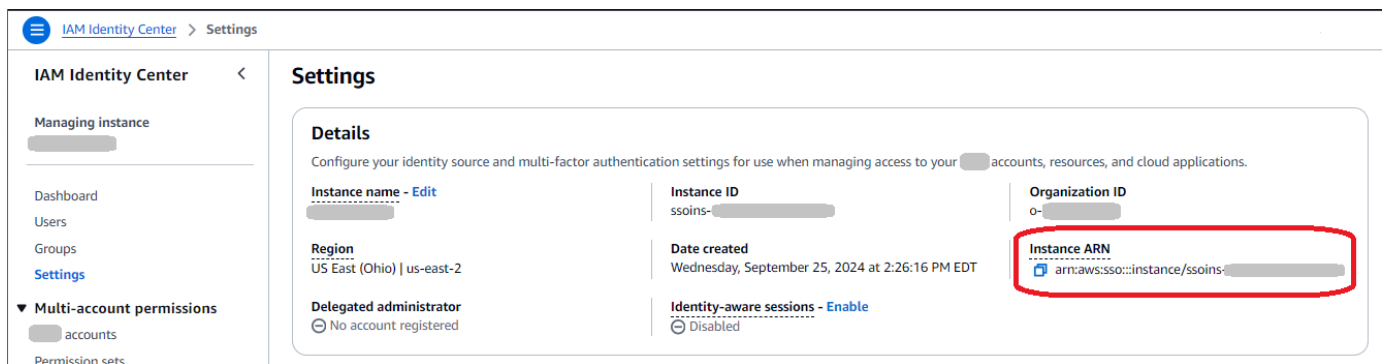

4. Create one or more users and, optionally, groups, to use with your Transfer Family web app. If you're using an IAM Identity Center directory as your identity provider, you can also add users directly from the web app itself. For more information, see [Assign or add users or groups to Transfer Family web app](#).

Configure IAM roles for Transfer Family web apps

You will need two roles: one to use as an identity bearer role for your web app, and a second to use for configuring an access grant. An identity bearer role is a role that includes an authenticated user's identity in its sessions. It's used to make requests to S3 Access Grants for data access on behalf of the user.

Note

You can skip the procedure for creating an identity bearer role. For information about having the Transfer Family service create the identity bearer role, see [Create a Transfer Family web app](#).

You can skip the procedure for creating an access grants role. In the procedure for creating an access grant, in the step where you register an S3 location, choose **Create new role**.

Create an identity bearer role

1. Sign in to the Amazon Web Services Management Console and open the IAM console at <https://console.amazonaws.cn/iam/>.
2. Choose **Roles**, and then **Create role**.
3. Choose **Custom trust policy** and then paste in the following code.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": [
        "sts:AssumeRole",
        "sts:SetContext"
      ]
    }
  ]
}
```

4. Choose **Next** and then skip **Add permissions** and select **Next** again.

5. Enter a name, for example `web-app-identity-bearer`.
6. Choose **Create role** to create the identity bearer role.
7. Choose the role that you just created from the list, then in the **Permissions policies** panel, choose **Add permissions > Create inline policy**.
8. In the **Policy editor**, select **JSON** and then paste in the following code block.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "s3:GetDataAccess",
        "s3:ListCallerAccessGrants",
        "s3:ListAccessGrantsInstances"
      ],
      "Resource": "*"
    }
  ]
}
```

9. For the policy name, enter `AllowS3AccessGrants`, and then select **Create policy**.

Next, you create the role that S3 Access Grants assumes to vend temporary credentials to the grantee.

Note

If you allow the service to create the identity bearer role for you, that role sets confused deputy protection. Therefore, its code is different from what is displayed here.

Create an access grants role

1. Sign in to the Amazon Web Services Management Console and open the IAM console at <https://console.amazonaws.cn/iam/>.
2. Choose **Roles**, and then **Create role**. This role should have permission to access your S3 data in the Amazon Web Services Region.
3. Choose **Custom trust policy**, and then paste in the following code.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {
        "Service": "access-grants.s3.amazonaws.com"
      },
      "Action": [
        "sts:AssumeRole",
        "sts:SetContext"
      ]
    }
  ]
}
```

4. Choose **Next** add a minimal policy as described in [Register a location](#). While not recommended, you can add the **AmazonS3FullAccess** managed policy, which may be too permissive for your needs.
5. Choose **Next**, and enter a name (for example `access-grants-location`).
6. Choose **Create role** to create the role.

Note

If you allow the service to create the access grants role for you, that role sets confused deputy protection. Therefore, its code is different from what is displayed here.

Configure a Transfer Family web app

This section describes the procedures for creating a Transfer Family web app and then assigning users and groups that can use it.

Note

Repeat these procedures to add additional web apps. You can reuse the IAM roles that you created earlier. Make sure to add the access endpoints for the new web apps to each bucket's Cross-origin resource sharing (CORS) policy.

Create a Transfer Family web app

Note

If you are not using the IAM Identity Center directory for your identity provider, don't attempt to create a web app until you have already set up IAM Identity Center and configured a third party identity provider, as described in [Configure your identity provider for Transfer Family web apps](#).

Complete the following steps to create a Transfer Family web app.


To create a Transfer Family web app

1. Sign in to the Amazon Web Services Management Console and open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Web apps**.
3. Choose **Create web app**.

For authentication access, the pane is populated as follows.

- If you have already created either an organization or account instance in Amazon IAM Identity Center, then you see this message: **Your Amazon Transfer Family application connected to an account instance of IAM Identity Center**.
 - If you already have an account instance and are a member of an organization instance, you have the option to choose which instance to connect.
 - If you don't already have an account instance, or are a member in an organization instance, you're presented with the options to create an account instance.
4. In the **Permission type** pane, you can use a previously created role, or have the service create one for you.

- If you have already created an identity bearer role, choose **Use an existing role** and choose your role from the **Select an existing role** menu.
 - To have the service create a role for you, choose **Create and use a new service role**.
5. In the **Web app units** pane, choose a value. One web app unit allows web app activity from up to 250 unique sessions. When creating a web app, you provision how many units you need based on your expected peak workload volumes. Changing your web app units has an impact on your billing. For information about pricing, see [Amazon Transfer Family Pricing](#).
 6. If you are using Transfer Family in an Amazon GovCloud (US) Region, you can select the **FIPS Enabled endpoint** checkbox in the **FIPS Enabled** pane. For all other Amazon Web Services Regions, this option is unavailable.
 7. (Optional) Add a tag to help you organize your web apps. We suggest that you add a tag with **Name** as the key and a descriptive name as the value.
 8. Choose **Next**. On this screen, you can optionally provide a title for your web app. If you don't provide a title, the default title of **Transfer Web App** is supplied. You can also upload image files for your logo and favicon.
 9. Choose **Next**, then choose **Create web app**.

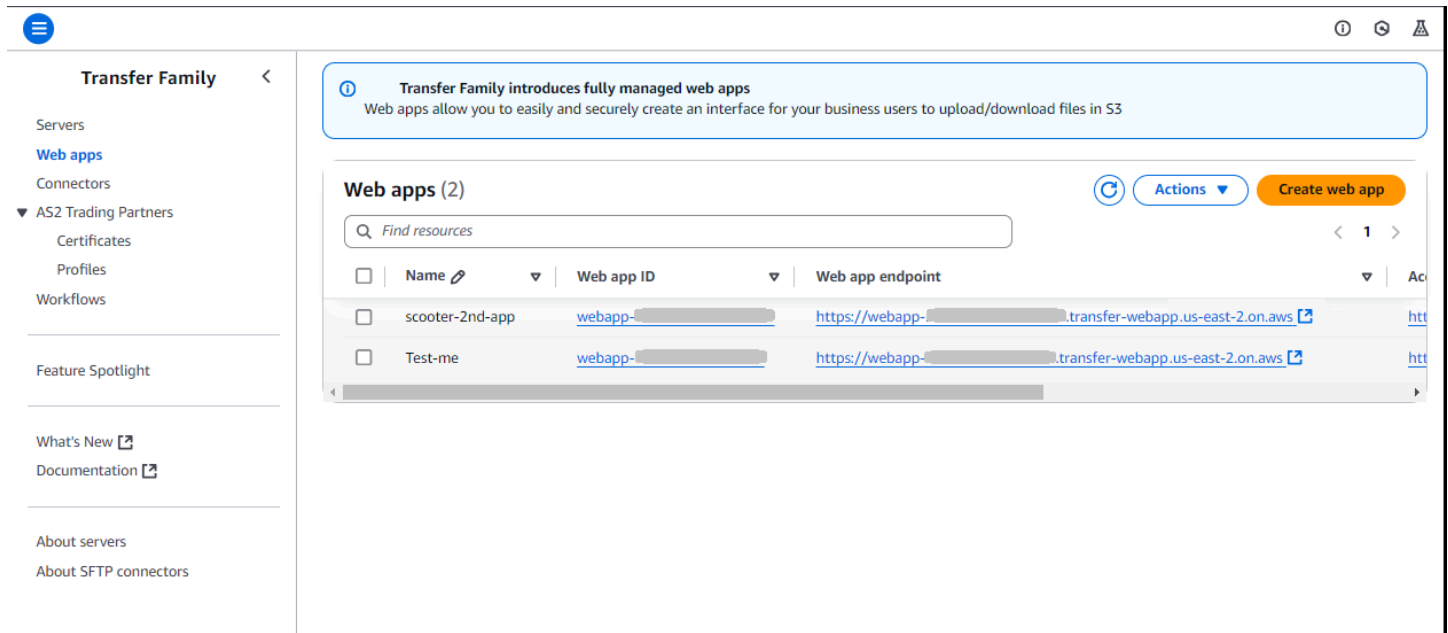

The screenshot shows the Amazon Transfer Family console interface. On the left is a navigation sidebar with options like Servers, Web apps, Connectors, AS2 Trading Partners, Certificates, Profiles, Workflows, Feature Spotlight, What's New, and Documentation. The main content area displays a notification about fully managed web apps and a table of existing web apps.

Transfer Family introduces fully managed web apps
Web apps allow you to easily and securely create an interface for your business users to upload/download files in S3

Web apps (2)

Find resources

<input type="checkbox"/>	Name ↗	Web app ID	Web app endpoint	Ac
<input type="checkbox"/>	scooter-2nd-app	webapp- [redacted]	https://webapp-[redacted].transfer-webapp.us-east-2.on.aws	htt
<input type="checkbox"/>	Test-me	webapp- [redacted]	https://webapp-[redacted].transfer-webapp.us-east-2.on.aws	htt

Note

Make sure to set up a Cross-origin resource sharing (CORS) policy for all of the buckets that are accessed from the web app endpoint.

Assign or add users or groups to Transfer Family web app

After you create a Transfer Family web app, you can assign users and groups who can then access the web app. You can either retrieve users that are already created and stored in IAM Identity Center, or you can [add new users directly](#) (if you're using an IAM Identity Center directory as your identity provider). If you add new users, they are also added to your IAM Identity Center instance.

Note the following:

- You can only add new users if you are using the IAM Identity Center directory as your identity source and have the proper permissions. If you are a member of an organization instance, you might not have the necessary permissions to add users.

Note

If you don't assign users or groups to your application, your users will get an error when they attempt to log into your web app.

- If you create a new user, you must also create an S3 access grant for this user so that they can access data on your web app.
- After you create a new user, that user receives an onboarding email from IAM Identity Center with directions for how to proceed.

To assign users to a Transfer Family web app


1. Navigate to your web app list, and choose the one that you want to edit.
2. Choose **Assign users and groups**.

The screenshot shows the Amazon Transfer Family console interface for a web application. At the top, there are three buttons: "Assign users and groups" (highlighted in orange), "Clear customization", and "Delete". Below this is a "Web app details" section with an "Edit" button. The details include:

- Web app endpoint:** <https://webapp-...us-east-2.on.aws>
- Access endpoint:** <https://...>
- Identity provider:** IAM Identity Center
- IAM role:** `arn:aws:iam::...:role/web-app-identity-bearer`

Below the details is a tabbed interface with "Users" selected and "Groups" visible. The "Users (1)" section contains a search bar with the placeholder "Find resources" and a "Delete" button. Below the search bar is a table with the following columns: "UserId", "Display name", and "Username". A single user entry is visible in the table, with its details obscured by a grey bar.

3. To assign users that you previously created in IAM Identity Center, select **Assign existing users and groups**. To create new users, skip ahead to step 4.
 - a. An information screen appears. Choose **Get started** to continue.
 - b. Search for the user. Note that no users appear until you begin entering your search criteria. You must search by the *display name*, not the *username*, if different. Only exact matches are returned. If you can't find your user, navigate to the IAM Identity Center management console, find the user, then copy and paste their display name here.

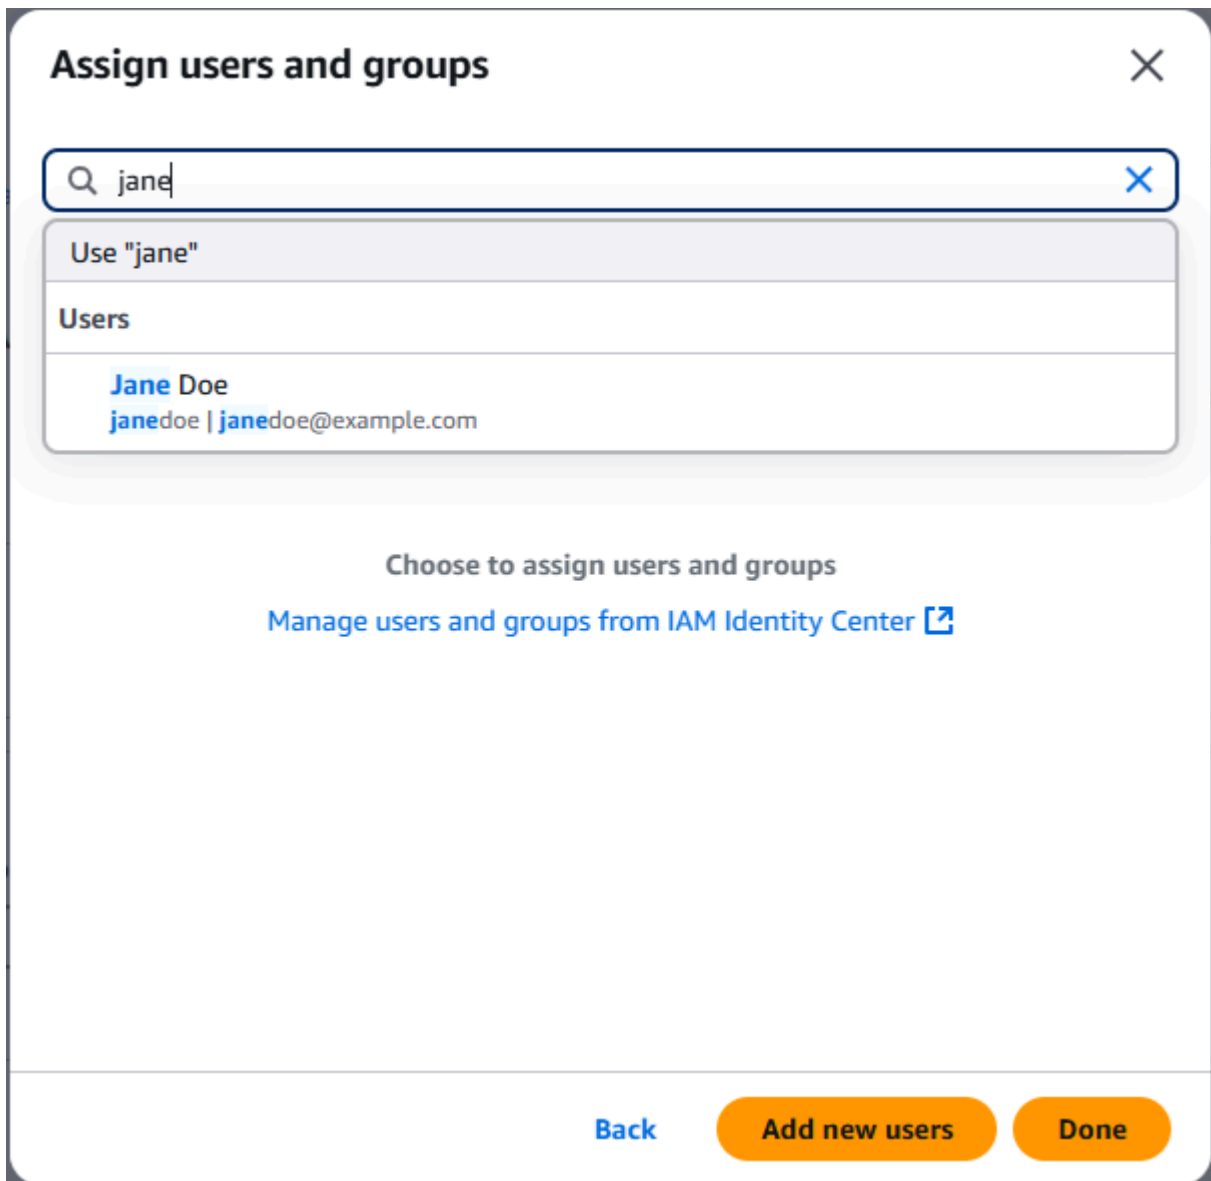

- c. Choose the users and groups to add, then choose **Assign**.
4. To create a new user, select **Add and assign new users**.
 - a. An information screen appears. Choose **Get started** to continue.
 - b. Choose **Add new users**.
 - c. Enter the following user details into the dialog box: username, first and last name, and an email address.

Add new users ✕

Info Newly-created users are enabled by default. To grant them access to Add User Widget, you must set their password in the IAM Identity Center console. [Manage user passwords in the IAM Identity Center console](#) ✕

Username
A username is required for this person to sign in to the AWS access portal. You can't change the username later.

johnstiles

Maximum length of 128 characters. Can only contain alphanumeric characters or any of the following: +, -, @, _

First name **Last name**

John Stiles

Email address **Confirm email address**

johnstiles@example.com johnstiles@example.com

Display name
This is typically the full name of the user (first and last name) and appears in the users list.

John Stiles

[Cancel](#) [Next](#)

- d. Choose **Next**, then choose **Add** to add the user and close the dialog box, or **Add new user** to create another user.

Set up Cross-origin resource sharing (CORS) for your bucket

You must set up cross-origin resource sharing (CORS) for all buckets that are used by your web app. A *CORS configuration* is a document that defines rules that identify the origins that you will allow to access your bucket. For more information about CORS, see [Configuring cross-origin resource sharing \(CORS\)](#).

⚠ Important

If you don't set up CORS, your end users receive an error when they attempt to access a location on your web app.

To set up Cross-origin resource sharing (CORS) for your Amazon S3 bucket

1. Sign in to the Amazon Web Services Management Console and open the Amazon S3 console at <https://console.amazonaws.cn/s3/>.
2. Choose **Buckets** from the left navigation panel and search for your bucket in the search dialog, then choose the **Permissions** tab.
3. In **Cross-origin resource sharing (CORS)**, choose **Edit** and paste in the following code. Replace *WebAppEndpoint* with the actual access endpoint for your web app. This can be either the access endpoint that's created when the web app is created, or a custom access endpoint, if you create one. Make sure not to enter trailing slashes, because doing so causes errors when users attempt to log on to your web app.
 - Incorrect example: `https://webapp-c7bf3423.transfer-webapp.us-east-2.on.aws/`
 - Correct example: `https://webapp-c7bf3423.transfer-webapp.us-east-2.on.aws`

If you are reusing a bucket for multiple web apps, append their endpoints to the `AllowedOrigins` list.

```
[
  {
    "AllowedHeaders": [
      "*"
    ],
    "AllowedMethods": [
      "GET",
      "PUT",
      "POST",
      "DELETE",
      "HEAD"
    ],
    "AllowedOrigins": [
      "https://WebAppEndpoint"
    ]
  }
]
```

```
    ],
    "ExposeHeaders": [
      "last-modified",
      "content-length",
      "etag",
      "x-amz-version-id",
      "content-type",
      "x-amz-request-id",
      "x-amz-id-2",
      "date",
      "x-amz-cf-id",
      "x-amz-storage-class",
      "access-control-expose-headers"
    ],
    "MaxAgeSeconds": 3000
  }
]
```

4. Choose **Save changes** to update the CORS.

To test your CORS configuration, see [Testing CORS](#).

Configure Amazon S3 Access Grants for Transfer Family web apps

This topic describes how to add an access grant using Amazon S3 Access Grants. This access grant defines access to your data directly to your users and groups in your corporate directory and vends just-in-time, least privilege, temporary credentials based on grants. An individual grant in an S3 Access Grants instance allows a specific user or group in a corporate directory—to get access within a location that is registered in your S3 Access Grants instance. For more details, see [S3 Access Grants concepts](#) in the Amazon S3 User Guide.

Note

You can't use the IAM Identity Center directory with S3 Access Grants other than with Transfer Family web apps.

You must specify an Amazon S3 access grant for identity propagation. An Amazon S3 access grant stores the data that your end users must access. When your end users sign in to your Transfer

Family web app, S3 Access Grants passes a user's identity to the trusted application. This section describes how to add and configure an Amazon S3 access grant instance and then an access grant for an Amazon S3 bucket.

Note

Have your [IAM Identity Center instance ARN](#) and user or group ID ready, as you need them to complete setting up your access grant.

To create a grant using Amazon S3 Access Grants

1. Sign in to the Amazon Web Services Management Console and open the Amazon S3 console at <https://console.amazonaws.cn/s3/>.
2. Create a bucket, or note an existing bucket to use with your web app. For information on creating buckets, see the [Amazon S3 User Guide](#).
3. From the left navigation pane, choose **Access Grants**.
4. Choose **Create S3 Access Grants instance** and provide the following information.
 - Select **Add IAM Identity Center instance in *your-Region*** where *your-Region* is your Amazon Web Services Region. Keep this box cleared if you are not using IAM Identity Center as your identity provider.
 - Paste in your IAM Identity Center instance ARN.

[Amazon S3](#) > [Access Grants](#) > Set up Access Grants Instance

- Step 1
- **Create S3 Access Grants instance**
- Step 2
- Register S3 Buckets or prefixes as locations
- Step 3
- Create grant
- Step 4
- Review and finish

Create S3 Access Grants instance Info

When you create your S3 Access Grants instance, you can use identities from your corporate directory or you can use IAM users and roles. This Access Grants instance serves as the container for your individual grants.

S3 Access Grants instance Info

Region

You can create one S3 Access Grants instance per Region per account.
US East (Ohio) us-east-2

Add IAM Identity Center instance in US East (Ohio) us-east-2 - optional

You can use an IAM Identity Center instance to specify Identities from corporate directories. If you don't have an existing IAM Identity Center instance, you can add one after creating your S3 Access Grants instance.

IAM Identity Center instance ARN

You can find the IAM Identity Center Instance ARN in the [IAM Identity Center console](#).

Format: arn:aws:sso::instance/<instanceIdentifier>

Choose **Next** to continue.

5. **Register S3 Buckets or prefixes as locations.** We recommend that you register the default location, `s3://`, and map it to an IAM role. The location at this default path covers access to all of your Amazon S3 buckets in the Amazon Web Services Region of your account. When you create an access grant, you can narrow the scope to a bucket, a prefix, or an object within the default location.

Provide the following information.

- For the **Scope**, browse for a bucket or enter the name of your bucket, and optionally a prefix.
- For the IAM role, choose **Create new role** to have the service create a role.

Alternatively, you can create the role yourself, as described in [Configure IAM roles for Transfer Family web apps](#), and then enter its ARN here.

Amazon S3 > Access Grants > US East (N. Virginia) us-east-1: default > Register location

Register location Info

Registering a location for S3 your S3 Access Grants instance assigns an IAM role the permission to get temporary credentials to access resources within the specified scope.

Location Info

Location scope Info
You can't edit the location scope after registering the location.

Scope

View ↗ Browse S3

Format for all buckets: `s3://`
 Format for bucket: `s3://<bucket>`
 Format for prefix: `s3://<bucket>/<prefix-with-path>`

Permissions
This IAM role allows S3 Access Grants to access your specified location scope.

ⓘ To ensure the role has proper permissions to access the location scope, consult the [list of permissions](#) ↗.

IAM role Info
This IAM role allows S3 Access Grants to access your specified location scope.

Create new role
 Choose from existing IAM roles
 Enter IAM role ARN

Cancel Register location

Choose **Next** to continue.

6. In the **Create Grant** screen, provide the following details.
 - For **Permissions**, select **Read** and **Write**. The access grant permissions can be either read-only or read & write, but write-only is not supported.
 - For **Grantee type**, choose **Directory identity from IAM Identity Center**.

- For **Directory identity type**, select **User** or **Group**, depending on which type you want to register now.
- In **IAM Identity Center user/group ID**, paste in the ID for your user or group. This ID is available in the **IAM Identity Center** console and in your Transfer Family web app in your users and groups table.

Create Grant [Info](#)

Grant [Info](#)
Grant a user or role a specific level of access to your S3 data.

Grant scope
The grant scope is a combination of the location and the subprefix. Choose a registered location or register a new location. To narrow the scope, specify a subprefix. If you use the default "s3://" location, you must specify a subprefix.

Location
s3://test

Location ID [Info](#)

IAM role [Info](#)
[web-app-access-grants](#)

[Browse locations](#) [Register location](#)

Subprefix - optional [Info](#)
Further scope the grant to a bucket, prefix, or an individual object.

Don't include any part of the grant already specified in the location.
Format for bucket: <bucket>/
Format for prefix: <bucket>/<prefix-with-path>*
Format for object: <bucket>/<prefix-with-path>/<object>

Grant scope [Info](#)
s3://test/*

The grant scope is an object

Permissions and access
Grant a user or role a specific level of access to your S3 data.

Permissions

Read
 Write

Grantee type [Info](#)

Directory identity from IAM Identity Center
 IAM principal

Directory identity type [Info](#)

User
 Group

IAM Identity Center user ID [Info](#)
The user that you want to grant this level of access to. You can find the ID in the [IAM Identity Center console](#)

Format: a1b2c3d4-5678-90ab-cdef-EXAMPLE1111

► **Application - optional**

Choose **Next**.

7. Review the settings on the screen. If everything is correct, choose **Finish** to create the access grant. Alternatively, you can choose **Cancel** or **Previous** to make changes.

- Step 1
● Create S3 Access Grants instance
- Step 2
● Register S3 Buckets or prefixes as locations
- Step 3
● Create grant
- Step 4
● **Review and finish**

Review and finish [Info](#)

Step 1 - Create S3 Access Grants instance

S3 Access Grants instance [Info](#)

Region

You can create one S3 Access Grants instance per Region per account.
US East (Ohio) us-east-2

Add IAM Identity Center instance in US East (Ohio) us-east-2 - optional [Info](#)

You can use an IAM Identity Center instance to specify identities from corporate directories. If you don't have an existing IAM Identity Center instance, you can add one after creating your S3 Access Grants instance.
arn:aws:sso:::application/ssoins:/apl

✔ Successfully created S3 Access Grants instance
Instance ARN: arn:aws:s3:us-east-2:::access-grants/default

🔗 You can grant other accounts access to this S3 Access Grants instance in the [Resource Access Management console](#)

Step 2 - Register S3 buckets or prefixes as locations

Location [Info](#)

Location scope

s3://

IAM role [Info](#)

[web-app-beta-access-grants](#)

✔ Successfully registered location
Location ID:

Step 3 - Create grants

Grant [Info](#)

Grant a user or role a specific level of access to your S3 data.

Grant scope

s3:///*

IAM role [Info](#)

[web-app-beta-access-grants](#)

Location ID

Permissions and access

Access Type
READWRITE

Grantee type
Directory identity user

Grantee ID

Application - optional
-

✔ Successfully created grant
Grant ARN: arn:aws:s3:us-east-2:::access-grants/default/grant/

Create another grant

Cancel [Previous](#) [Finish](#)

Amazon S3 > Access Grants > US East (Ohio) us-east-2: default

US East (Ohio) us-east-2: default [Info](#)

[Share Instance](#)

[Delete Instance](#)

S3 Access Grants provides scalable access control to data sets in your S3 buckets. To share an S3 Access Grants instance with external accounts by using the Resource Access Manager console, choose Share instance. With S3 Access Grants, you can use identities from your corporate directory or from Identity and Access Management (IAM) to control access. You can create one S3 Access Grants instance per Region per account.

S3 Access Grants instance overview [Info](#)

Amazon Resource Name (ARN)

[arn:aws:s3:us-east-2:\[:redacted\]:access-grants/default](#)

Creation date

October 25, 2024, 11:50:11 (UTC-04:00)

Account ID

[:redacted]

IAM Identity Center [Info](#)

[Deregister](#)

[Add](#)

IAM Identity Center instance ARN

[arn:aws:sso::\[:redacted\]:application/ssoins-\[:redacted\]/apl-\[:redacted\]](#)

[Grants](#) | [Locations](#)

Grants (1) [Info](#)

[Delete](#)

[Create Grant](#)

Find by grant scope or grantee

< 1 > ⚙️

Grant scope	Grant ID	Permission	Grantee type	Grantee ID	Creation date	Location ID	Application ARN
s3://[:redacted]/*	[:redacted]	Read, Write	Directory identity user	[:redacted]	October 25, 2024, 11:57:30 (UTC-04:00)	[:redacted]	ALL

This completes the setup for your web app. The users and groups that you've configured can visit the web app at the access point, log in, and upload and download files.

Update your access endpoint with a custom URL

The default access endpoint that is created with your web app contains service-generated identifiers. To provide a branded experience, you may want to provide a custom URL for your users to access your Transfer Family web app. This topic describes how to update your access endpoint with a custom URL.

Note

The following procedure relies on you using the recommended [CloudFormation stack template](#). You don't need to use the template: you can create the distribution by using the [CloudFront console](#) directly.

However, the provided template simplifies the process, and makes it easier to avoid misconfiguration. If you don't use the Amazon CloudFormation template, make sure to follow these guidelines:

- The [Origin request policy](#) should forward query strings and cookies to the origin, and should not forward the Host header to the origin.

- The [Cache policy](#) should not include the Host header in the cache key.

To customize your web app URL

1. Create a CloudFront distribution by using the Transfer Family supplied Amazon CloudFormation template, [CloudFormation stack template](#).
 - a. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
 - b. Choose **Create stack** and specify the following.
 - In the **Prerequisite - Prepare template** section, choose **Choose an existing template**.
 - In the **Specify template** section, choose **Upload a template file**.
 - Save the [CloudFormation stack template](#) file, and then upload it here.
 - c. Choose **Next** and provide the following information.
 - **WebAppEndpoint**: copy the value from your web app
 - **AccessEndpoint**: provide the custom domain name that you want to use
 - **AcmCertificateArn**: provide the ARN for a public or private SSL/TLS certificate that is stored in Amazon Certificate Manager
 - d. Complete the Amazon CloudFormation wizard until your new stack is created.
2. In your web app, edit the **Access endpoint**, updating the **Custom URL** to the URL that you want to use.

Transfer Family > Web apps > webapp- > Edit web app details

Edit web app details

Authentication access [Info](#)

Connect or create an Identity Center instance

Instance ARN

Select your instance ARN



Permission type [Info](#)

Create and use a new service role

Create and use an IAM role to allow the service to access the resources it needs to create your application

Use an existing role

Use an existing IAM role to allow the service to access the resources it needs to create your application

By selecting use existing role, you need to manually create an IAM Role in order for the Transfer Family web application to access your services data. Please select an existing IAM role below or [create a new role in IAM console](#)

Select an existing role

If your newly created role is not showing up in the dropdown list, please try the refresh button on the right

Find your IAM role



Make sure you have attached the trust policy and permission policy to the role you selected.

[learn more about required policies](#)

Access endpoint [Info](#)

Map your own fully qualified domain name to this web app so your end users can use your custom URL, not the service-provided URL to access your web app. Note- you can only complete this step in CloudFront after you have created the web app.

Custom URL

https://my-custom-url

[Create a new distribution](#)

- Create DNS records to route traffic for your custom domain name to the CloudFront distribution. If you're using Route 53 for the zone, you can create an Alias or CNAME record to the CloudFront distribution name (for example, **xxx.cloudfront.net**). For information about using Amazon Route 53 with CloudFront, see [Configuring Amazon Route 53 to route traffic to a CloudFront distribution](#).
- Update your cross-origin resource sharing policy by replacing the default access endpoint with the following line in the AllowedOrigins code block:

```
"https://custom-url"
```

You need to make this change for each bucket used by your web app.

After you make your update, the AllowedOrigins section of your CORS policy should look like the following:

```
"AllowedOrigins": [
  "https://custom-url"],
```

You need only a single AllowedOrigins entry for each Transfer Family web app.

See the [Set up Cross-origin resource sharing \(CORS\) for your Amazon S3 bucket](#) procedure for more details.

You can now visit your custom access endpoint, and share this link with your end users.

CloudTrail logging for Transfer Family web apps

CloudTrail is an Amazon Web Services service that creates a record of actions taken within your Amazon Web Services account. It continuously monitors and records API operations for activities like console sign-ins, Amazon Command Line Interface commands, and SDK/API operations. This allows you to keep a log of who took what action, when, and from where. CloudTrail helps with auditing, access management, and regulatory compliance by providing a history of all activity in your Amazon environment.

For Transfer Family web apps, see the following documentation for details on how view the logs for your end users' activity.

- [CloudTrail use cases for IAM Identity Center](#)
- [Understanding IAM Identity Center sign-in events](#)
- [CloudTrail userIdentity element](#)
- [Enabling CloudTrail event logging for S3 buckets and objects](#)
- [Amazon S3 CloudTrail events](#)

Troubleshooting your web apps

Note

These troubleshooting tips are meant for the web app administrator rather than the end user. For end users, if you encounter any problems, contact your web app administrator. All instances of *you* in the following paragraphs refer to the web app admin.

Troubleshoot network errors

Description

Your end user sees a network banner **Network Error** upon loading the web app endpoint.

Cause

The most common issues are as follows:

- The admin did not assign the user that is attempting to log on to the new application.
- The admin did not add the necessary actions to your IAM roles.
- You see a list of S3 Access Grants assigned to your user, but CORS is not configured correctly for your Amazon S3 bucket or buckets.

Solution

- In IAM Identity Center, make sure to assign the user to the correct application. Or, if you have a group assigned, make sure that the user attempting to log in belongs to the correct group. This is described in [Assign or add users or groups to Transfer Family web app](#).
- Check whether your roles contain the necessary actions in the **Custom trust policy** for both `sts:AssumeRole` and `sts:SetContext` actions. This is described in [Configure IAM roles for Transfer Family web apps](#).
- Check the CORS policy for all of the buckets used by your web app. This is described in [Set up Cross-origin resource sharing \(CORS\) for your Amazon S3 bucket](#).

Troubleshoot configured bucket not appearing

Description

Everything appears to be configured correctly, but the Amazon S3 bucket doesn't appear in the web app.

Cause

One possible cause is that the Amazon S3 bucket is not in the same account as the web app.

Solution

Ensure that the Amazon S3 bucket is in the same account as the web app. Cross-account buckets are not currently supported.

Troubleshoot custom URL errors

Description

When your end user signs into the web app, they receive the error message **Authorization failed: missing authorization code.**

Cause

If you used CloudFront directly, rather than the supplied Amazon CloudFormation template, you have likely misconfigured the origin request policy to not forward query strings.

Solution

Update your origin request policy to forward query strings and cookies to the origin.

Description

When your end user attempts to access a Transfer Family web app, they receive a 404 response.

Cause

If you used CloudFront directly, rather than the supplied Amazon CloudFormation template, you have likely misconfigured the cache policy to include the Host header in the cache key or misconfigured the origin request policy to forward the Host header.

Solution

- Make sure that your cache policy does not include the Host header in the cache key
- Make sure that your origin request policy does not forward the Host header.

Troubleshoot miscellaneous errors

Description

Your end user cannot log in, or cannot view any buckets or files, or you receive another error.

Cause

One possible cause is that the IAM Identity Center instance ARN doesn't match the value for your grants ARN or your web app IAM Identity Center instance ARN.

Solution

Check the following items to see if they match.

- In IAM Identity Center, navigate to **Settings** and view the **Instance ARN**.

```
arn:aws:sso:::instance/ssoins-instance-identifier
```

- In Amazon S3, navigate to **Access Grants** and view your **IAM Identity Center instance ARN**.

```
arn:aws:sso:::account-id:application/ssoins-instance-identifier/apl-1234567890abcdef0
```

- In Transfer Family, navigate to your web app details page and view its Instance ARN.

```
arn:aws:sso:::instance/ssoins-instance-identifier
```

The *instance-identifier* value must be the same in all three of these places.

End user instructions for Transfer Family web apps

Note

In this topic, the information is meant for the end users that are interacting with the web app. All instances of *you* in this topic refer to end users.

This topic describes how to access an Amazon Transfer Family web app that you are authorized to use, and describes how you can interact with it.

Web app quotas

Note the following limitations when using web apps.

- Maximum number of search results per query: 10,000
- The Amazon S3 buckets that are used by the Transfer Family web app must be in the same account as the web app itself. Cross-account buckets are not currently supported.
- Maximum search breadth per query: 10,000 searched files
- Maximum upload size per file: 160 GB (149 GiB)
- Maximum size file for copying: 5.36 GB (5 GiB)

- Folder names starting or ending with dots (.) are not supported


User experience for IAM Identity Center users

This section describes the user experience if your organization used IAM Identity Center to configure its users.

To access a Transfer Family web app

1. You should receive an email from **no-reply@login.awsapps.com** titled "Invitation to join Amazon IAM Identity Center." Accept the invitation to activate your user account.
2. In the message, choose the URL below **Your Amazon access portal URL**.

This takes you to the Amazon sign in screen.

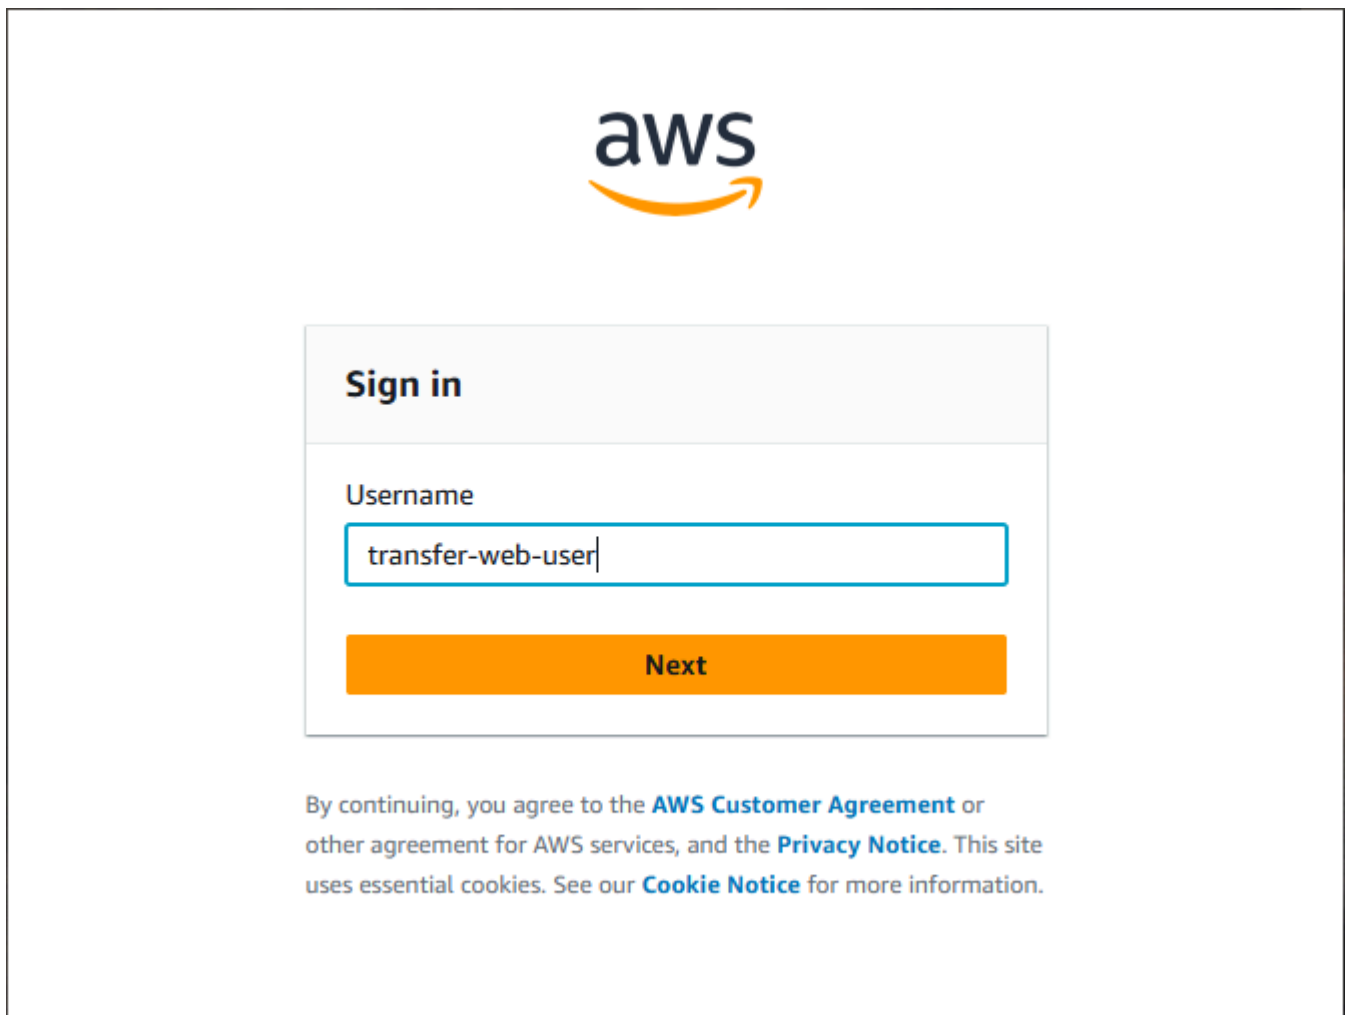

The screenshot shows the AWS sign-in interface. At the top center is the AWS logo. Below it is a white box with a light gray header containing the text "Sign in". Underneath the header is a "Username" label followed by a text input field containing the text "transfer-web-user". Below the input field is a prominent blue button labeled "Next". At the bottom of the white box, there is a line of text: "By continuing, you agree to the [AWS Customer Agreement](#) or other agreement for AWS services, and the [Privacy Notice](#). This site uses essential cookies. See our [Cookie Notice](#) for more information."

3. Enter your credentials and choose **Sign in**.

This takes you to the Amazon Web Services access portal, which shows a list of your available applications.

4. Choose the application for your Transfer Family web app.

User experience for third-party identity provider users

If your organization did not use Amazon IAM Identity Center to configure its users, your onboarding experience will depend upon the identity provider application that they used to configure their end users. After you authenticate and sign in, your web app interface is the same as that described in the next section.

Transfer Family end user interface

After you have authenticated and signed in, you can interact with the web app.

There are four main views.


- **Home page:** Your home page lists the S3 locations, which you can access, as well as the permissions for each. An *S3 location* is an S3 bucket or prefix, which you can define when using S3 Access Grants. This is the initial view for users that shows the root level S3 resources that your end users have access to and the permissions for each S3 location.

The screenshot displays the Amazon Transfer Family Home page. At the top left is the Amazon logo. In the top right corner, there is a user profile icon and a dropdown menu. Below the logo, the page title is "Home". There is a search bar with the placeholder text "Filter folders and files" and a "Submit" button. To the right of the search bar are navigation icons: a left arrow, the number "1", a right arrow, and a refresh icon. Below the search bar is a table with three columns: "Folder", "Bucket", and "Permission". The "Folder" column has a dropdown arrow and contains the text "test". The "Bucket" column contains the text "test" and is highlighted with a green rounded rectangle. Below this rectangle is the text "Buckets the web app can access". The "Permission" column contains the text "READWRITE" and is highlighted with a red rounded rectangle. Below this rectangle is the text "Permissions for the bucket".

- **Location details:** This view allows users to browse files and folders in S3, and upload or download files.
- **Location action:** After you choose an action (such as **Upload**), it opens up another view of the file location.
- **Vertical ellipsis:** The vertical ellipsis icon opens the **Actions** menu.

Available actions

Most of the actions are available from the **Actions** menu. For the other main action, downloading files, you use the download icon after you select a file (currently, you can only download one file at a time).

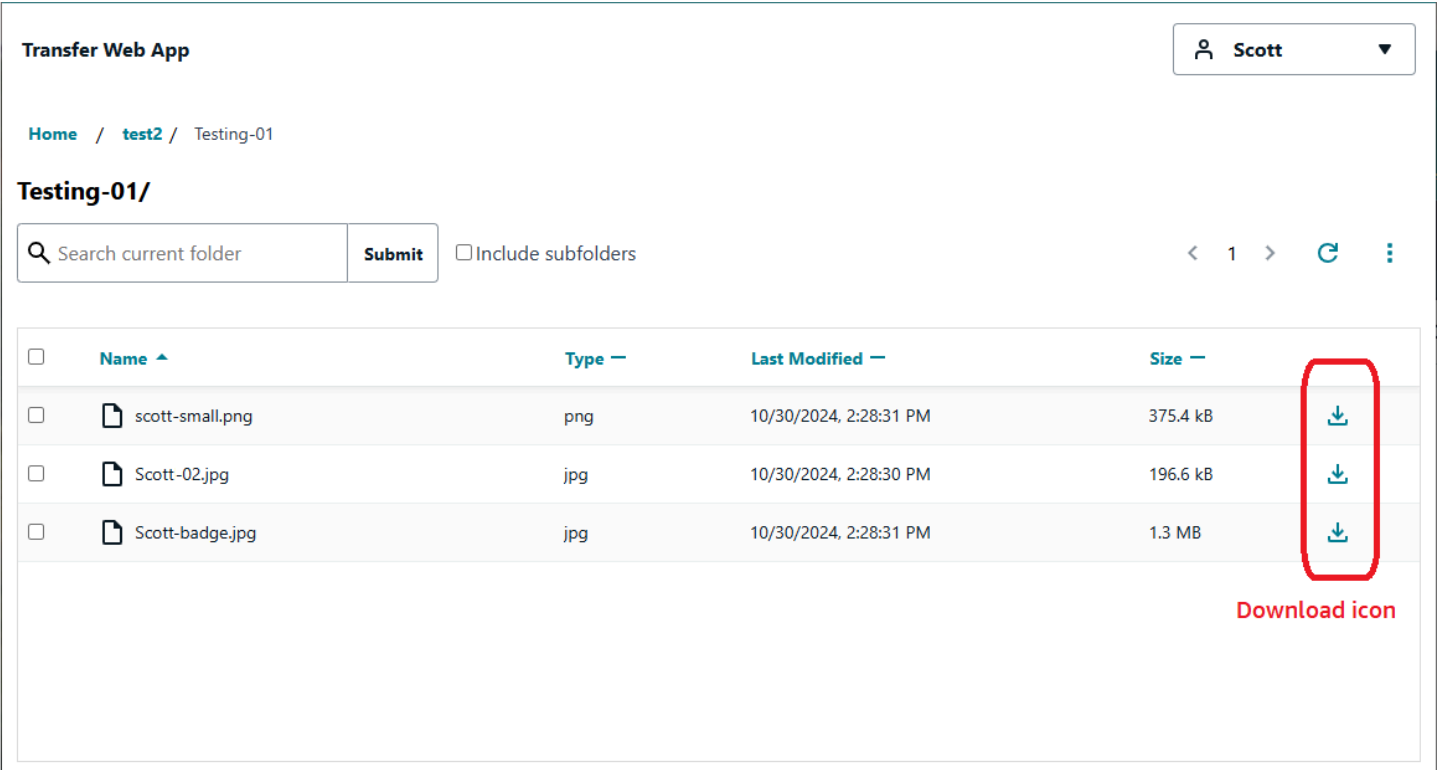

The screenshot shows the Amazon Transfer Web App interface. At the top, it says "Transfer Web App" and "Scott" is logged in. The breadcrumb path is "Home / test2 / Testing-01". Below that, the folder name "Testing-01/" is displayed. There is a search bar with "Search current folder" and a "Submit" button, along with an "Include subfolders" checkbox. Navigation icons for back, forward, and refresh are visible. The main content is a table with columns for Name, Type, Last Modified, and Size. Three files are listed: "scott-small.png", "Scott-02.jpg", and "Scott-badge.jpg". Each file has a download icon (a blue arrow pointing down) in the rightmost column. These download icons are highlighted with a red rounded rectangle. Below the table, the text "Download icon" is written in red.

<input type="checkbox"/>	Name ▲	Type —	Last Modified —	Size —	
<input type="checkbox"/>	scott-small.png	png	10/30/2024, 2:28:31 PM	375.4 kB	Download icon
<input type="checkbox"/>	Scott-02.jpg	jpg	10/30/2024, 2:28:30 PM	196.6 kB	Download icon
<input type="checkbox"/>	Scott-badge.jpg	jpg	10/30/2024, 2:28:31 PM	1.3 MB	Download icon

From a folder, use the **Actions** menu to perform any of the following tasks:

- Copy one or more files to another location.
- Create a folder.
- Delete one or more files.
- Upload one or more files.
- Upload an entire folder (including subfolders if any).

- Select a folder and navigate to it. You can then perform any of the previously listed actions.
- Sort by page.
- Filter by file or folder name per folder and subfolders.

The screenshot shows the Amazon Transfer Family interface. At the top left is the Amazon logo. In the top right corner, there is a user profile icon and a dropdown menu. Below the logo, the breadcrumb navigation shows "Home / test". The main heading is "test". Below the heading, there is a search bar with the text "Search current folder" and a "Submit" button. To the right of the search bar is a checkbox labeled "Include subfolders". Further right are navigation icons: a left arrow, the number "1", a right arrow, a refresh icon, and a vertical ellipsis menu icon. A table lists the contents of the "test" folder:

Name ▲	Type —	Last Modified —
📁 My First Folder/	Folder	
📁 My Second Folder/	Folder	
📁 Testing-01/	Folder	
📁 Testing-02/	Folder	

A context menu is open on the right side of the table, listing the following actions:

- 📄 Copy files
- 📁 Create folder
- 🗑️ Delete files
- 📄 Upload files
- 📁 Upload folder

Amazon Transfer Family SFTP connectors

An Amazon Transfer Family SFTP connector establishes a connection with a remote SFTP server to transfer files between Amazon storage and a remote server, using the SFTP protocol. You can send files from Amazon S3 to an external, partner-owned SFTP server, retrieve files from a partner's SFTP server to Amazon S3 or list, delete, rename or move files on the remote server. Using SFTP connectors, you can build automated, event-driven file transfer workflows in Amazon .

Note

Currently, SFTP connectors can only be used to connect to remote SFTP servers that offer an internet-accessible endpoint.

Topics

- [Creating SFTP connectors](#)
- [Using SFTP connectors](#)
- [Monitoring SFTP connectors](#)
- [Managing SFTP connectors](#)
- [Scaling and quotas for SFTP connectors](#)
- [Reference architectures using SFTP connectors](#)

Creating SFTP connectors

This topic describes how to create SFTP connectors. Each connector provides the ability to connect with one remote SFTP server. You perform the following high-level tasks to configure an SFTP connector.

1. Store the authentication credentials for the connector in Amazon Secrets Manager.
2. Create the connector, specifying the secret ARN, the remote server's URL, the security policy containing the algorithms that will be supported by the connector, and other configuration settings.
3. After you create the connector, you can test it to ensure that it can establish connections with the remote SFTP server.

Topics

- [Store authentication credentials for SFTP connectors in Secrets Manager](#)
- [Create an SFTP connector](#)
- [Test an SFTP connector](#)

Store authentication credentials for SFTP connectors in Secrets Manager

You can use Secrets Manager to store user credentials for your SFTP connectors. When you create your secret, you must provide a username. Additionally, you can provide either a password, a private key, or both. For details, see [Quotas for SFTP connectors](#).

Note

When you store secrets in Secrets Manager, your Amazon Web Services account incurs charges. For information about pricing, see [Amazon Secrets Manager Pricing](#).

To store user credentials in Secrets Manager for an SFTP connector

1. Sign in to the Amazon Web Services Management Console and open the Amazon Secrets Manager console at <https://console.amazonaws.cn/secretsmanager/>.
2. In the left navigation pane, choose **Secrets**.
3. On the **Secrets** page, choose **Store a new secret**.
4. On the **Choose secret type** page, for **Secret type**, choose **Other type of secret**.
5. Provide the key/value information for your secret: you need to provide the username, and either a private key or a password.
 - a. In the **Key/value pairs** section, choose the **Key/value** tab.
 - **Key** – Enter **Username**.
 - **value** – Enter the name of the user that is authorized to connect to the partner's server.
 - b. If you want to provide a key pair, choose **Add row**, and in the **Key/value pairs** section, choose the **Key/value** tab.
 - **Key** – Enter **PrivateKey**.

- **value** – paste in your private key.

Tip: The private key data that you enter must correspond to the public key that is stored for this user on the remote SFTP server.

For details on how to generate a public/private key pair, see [Creating SSH keys on macOS, Linux, or Unix](#).

- c. If you want to provide a password, choose **Add row**, and in the **Key/value pairs** section, choose the **Key/value** tab.
 - **Key** – Enter **Password**.
 - **value** – Enter the password for the user.
6. Choose **Next**.
 7. On the **Configure secret** page, enter a name and description for your secret. We recommend that you use a prefix of **aws/transfer/** for the name. For example, you could name your secret **aws/transfer/connector-1**.
 8. Choose **Next**, and then accept the defaults on the **Configure rotation** page. Then choose **Next**.
 9. On the **Review** page, choose **Store** to create and store the secret.

Create an SFTP connector

This procedure explains how to create SFTP connectors by using the Amazon Transfer Family console or Amazon CLI.

Console

To create an SFTP connector


1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **SFTP Connectors**, then choose **Create SFTP connector**.
3. In the **Connector configuration** section, provide the following information:

Connector configuration


URL
Enter the URL of remote server to which you need to connect using the SFTP connector

URL of the remote (target) SFTP server

Access role [Info](#)
IAM Role for Amazon S3 access and Amazon Secrets Manager access

Logging role - optional [Info](#)
IAM role for the connector to push events to your CloudWatch logs

- For the **URL**, enter the URL for a remote SFTP server. This URL must be formatted as `sftp://partner-SFTP-server-url`, for example `sftp://AnyCompany.com`.

 **Note**

Optionally, you can provide a port number in your URL. The format is `sftp://partner-SFTP-server-url:port-number`. The default port number (when no port is specified) is port 22.

- For the **Access role**, choose the Amazon Resource Name (ARN) of the Amazon Identity and Access Management (IAM) role to use.
- **Make sure that this role provides read and write access** to the parent directory of the file location that's used in the `StartFileTransfer` request.
- **Make sure that this role provides permission** for `secretsmanager:GetSecretValue` to access the secret.

 **Note**

In the policy, you must specify the ARN for the secret. The ARN contains the secret name, but appends the name with six, random, alphanumeric characters. An ARN for a secret has the following format.

```
arn:aws-cn:secretsmanager:region:account-id:secret:aws/  
transfer/SecretName-6RandomCharacters
```

- **Make sure this role contains a trust relationship** that allows the connector to access your resources when servicing your users' transfer requests. For details on establishing a trust relationship, see [To establish a trust relationship](#).

The following example grants the necessary permissions to access the *amzn-s3-demo-bucket* in Amazon S3, and the specified secret stored in Secrets Manager.

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "AllowListingOfUserFolder",  
      "Action": [  
        "s3:ListBucket",  
        "s3:GetBucketLocation"  
      ],  
      "Effect": "Allow",  
      "Resource": [  
        "arn:aws-cn:s3::amzn-s3-demo-bucket"  
      ]  
    },  
    {  
      "Sid": "HomeDirObjectAccess",  
      "Effect": "Allow",  
      "Action": [  
        "s3:PutObject",  
        "s3:GetObject",  
        "s3:DeleteObject",  
        "s3:DeleteObjectVersion",  
        "s3:GetObjectVersion",  
        "s3:GetObjectACL",  
        "s3:PutObjectACL"  
      ],  
      "Resource": "arn:aws-cn:s3::amzn-s3-demo-bucket/*"  
    },  
    {  
      "Sid": "GetConnectorSecretValue",  
      "Effect": "Allow",
```

```

    "Action": [
      "secretsmanager:GetSecretValue"
    ],
    "Resource": "arn:aws-cn:secretsmanager:region:account-id:secret:aws/
transfer/SecretName-6RandomCharacters"
  }
]
}

```

Note

For the access role, the example grants access to a single secret. However, you can use a wildcard character, which can save work if you want to reuse the same IAM role for multiple users and secrets. For example, the following resource statement grants permissions for all secrets that have names beginning with `aws/transfer/`.

```

"Resource": "arn:aws-cn:secretsmanager:region:account-id:secret:aws/
transfer/*"

```

You can also store secrets containing your SFTP credentials in another Amazon Web Services account. For details on enabling cross-account secret access, see [Permissions to Amazon Secrets Manager secrets for users in a different account](#).

- (Optional) For the **Logging role**, choose the IAM role for the connector to use to push events to your CloudWatch logs. The following example policy lists the necessary permissions to log events for SFTP connectors.

```

{
  "Version": "2012-10-17",
  "Statement": [{
    "Sid": "SFTPConnectorPermissions",
    "Effect": "Allow",
    "Action": [
      "logs:CreateLogStream",
      "logs:DescribeLogStreams",
      "logs:CreateLogGroup",
      "logs:PutLogEvents"
    ],
    "Resource": [

```

```

    "arn:aws:logs:*:*:log-group:/aws/transfer/*"
  ]
}]]
}

```

4. In the **SFTP Configuration** section, provide the following information:

SFTP configuration

SFTP configuration Info

Connector credentials Info
 Select a secret from Secrets Manager containing the username and SSH private key, or username and password, to be used to connect to the remote server

aws/transfer/sftp-connector1 Store a new secret

Trusted host keys Info
 Enter the public portion of the host key(s) that is used to identify the remote server you need to connect to. Connection to the remote server is established only if it presents a SSH fingerprint that matches one of the below.

ssh-rsa AAAA... Remove

Add trusted host key

- For **Connector credentials**, from the dropdown list, choose the name of a secret in Amazon Secrets Manager that contains the SFTP user's private key or password. You must create a secret and store it in a specific manner. For details, see [Store authentication credentials for SFTP connectors in Secrets Manager](#).
- (Optional) You have an option to create your connector while leaving the `TrustedHostKeys` parameter empty. However, your connector will not be able to transfer files with the remote server until you provide this parameter in your connector's configuration. You can enter the Trusted host key(s) at the time of creating your connector, or update your connector later by using the host key information returned by the `TestConnection` console action or API command. That is, for the **Trusted host keys** text box, you can do either of the following:
 - **Provide the Trusted Host Key(s) at the time of creating your connector.** Paste in the public portion of the host key that is used to identify the external server. You can add more than one key, by choosing **Add trusted host key** to add an additional key. You can use the `ssh-keyscan` command against the SFTP server to retrieve the necessary key. For details about the format and type of trusted host keys that Transfer Family supports, see [SFTPConnectorConfig](#).
 - *Leave the Trusted Host Key(s) text box empty when creating your connector and update your connector at a later time with this information.* If you do not have the host key information at the time of creating your connector, you can leave this parameter

empty for now and proceed with creating your connector. After the connector is created, use the new connector's ID to run the `TestConnection` command, either in the Amazon CLI or from the connector's detail page. If successful, `TestConnection` will return the necessary host key information. You can then edit your connector using the console (or by running the `UpdateConnector` Amazon CLI command) and add the host key information that was returned when you ran `TestConnection`.


⚠ Important

If you retrieve the remote server's host key by running `TestConnection`, make sure that you perform out-of-band validation on the key that is returned. You must accept the new key as trusted, or verify the presented fingerprint with a previously known fingerprint that you have received from the owner of the remote SFTP server you are connecting to.

- (Optional) For **Maximum concurrent connections**, from the dropdown list, choose the number of concurrent connections that your connector creates to the remote server. The default selection on the console is **5**.

This setting specifies the number of active connections that your connector can establish with the remote server at the same time. Creating concurrent connections can enhance connector performance by enabling parallel operations.

5. In the **Cryptographic algorithm options** section, choose a **Security policy** from the dropdown list in the **Security Policy** field. The security policy enables you to select the cryptographic algorithms that your connector supports. For details on the available security policies and algorithms, see [Security policies for Amazon Transfer Family SFTP connectors](#).
6. (Optional) In the **Tags** section, for **Key** and **Value**, enter one or more tags as key-value pairs.
7. After you have confirmed all of your settings, choose **Create SFTP connector** to create the SFTP connector. If the connector is created successfully, a screen appears with a list of the assigned static IP addresses and a **Test connection** button. Use the button to test the configuration for your new connector.

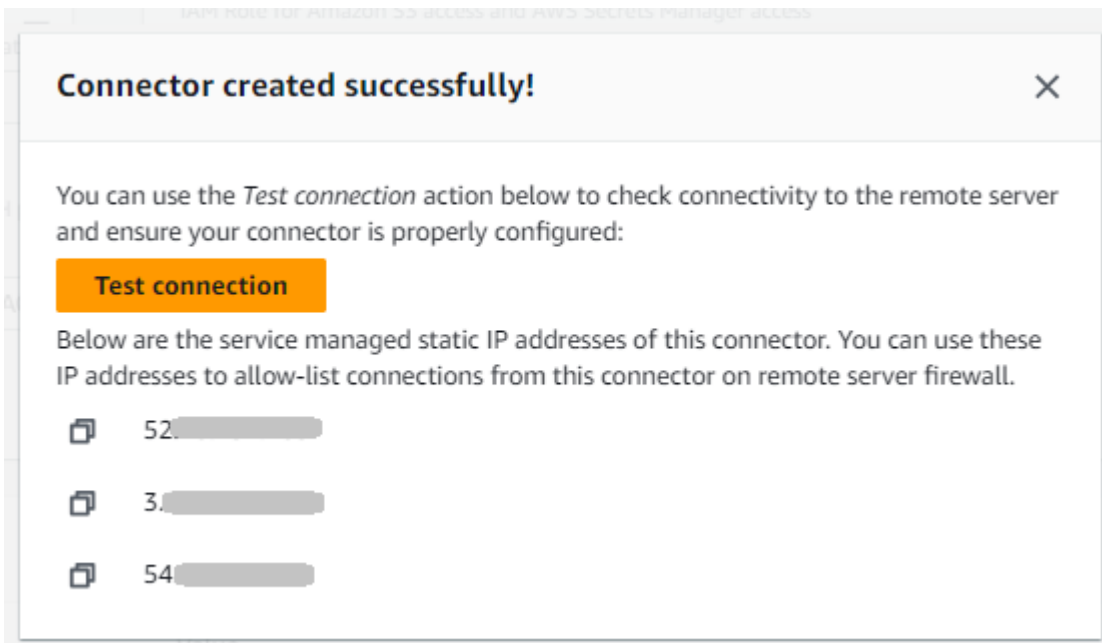

The **Connectors** page appears, with the ID of your new SFTP connector added to the list. To view the details for your connectors, see [View SFTP connector details](#).

CLI

You use the [create-connector](#) command to create a connector. To use this command to create an SFTP connector, you must provide the following information.

- The URL for a remote SFTP server. This URL must be formatted as `sftp://partner-SFTP-server-url`, for example `sftp://AnyCompany.com`.
- The access role. Choose the Amazon Resource Name (ARN) of the Amazon Identity and Access Management (IAM) role to use.
 - **Make sure that this role provides read and write access** to the parent directory of the file location that's used in the `StartFileTransfer` request.
 - **Make sure that this role provides permission** for `secretsmanager:GetSecretValue` to access the secret.

Note

In the policy, you must specify the ARN for the secret. The ARN contains the secret name, but appends the name with six, random, alphanumeric characters. An ARN for a secret has the following format.

```
arn:aws-cn:secretsmanager:region:account-id:secret:aws/
transfer/SecretName-6RandomCharacters
```

- **Make sure this role contains a trust relationship** that allows the connector to access your resources when servicing your users' transfer requests. For details on establishing a trust relationship, see [To establish a trust relationship](#).

The following example grants the necessary permissions to access the *amzn-s3-demo-bucket* in Amazon S3, and the specified secret stored in Secrets Manager.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowListingOfUserFolder",
      "Action": [
        "s3:ListBucket",
        "s3:GetBucketLocation"
      ],
      "Effect": "Allow",
      "Resource": [
        "arn:aws-cn:s3::amzn-s3-demo-bucket"
      ]
    },
    {
      "Sid": "HomeDirObjectAccess",
      "Effect": "Allow",
      "Action": [
        "s3:PutObject",
        "s3:GetObject",
        "s3:DeleteObject",
        "s3:DeleteObjectVersion",
        "s3:GetObjectVersion",
        "s3:GetObjectACL",
        "s3:PutObjectACL"
      ],
      "Resource": "arn:aws-cn:s3::amzn-s3-demo-bucket/*"
    },
    {
      "Sid": "GetConnectorSecretValue",
      "Effect": "Allow",
```



```

    "Action": [
      "secretsmanager:GetSecretValue"
    ],
    "Resource": "arn:aws-cn:secretsmanager:region:account-id:secret:aws/
transfer/SecretName-6RandomCharacters"
  }
]
}

```

Note

For the access role, the example grants access to a single secret. However, you can use a wildcard character, which can save work if you want to reuse the same IAM role for multiple users and secrets. For example, the following resource statement grants permissions for all secrets that have names beginning with `aws/transfer`.

```
"Resource": "arn:aws-cn:secretsmanager:region:account-id:secret:aws/transfer/*"
```

You can also store secrets containing your SFTP credentials in another Amazon Web Services account. For details on enabling cross-account secret access, see [Permissions to Amazon Secrets Manager secrets for users in a different account](#).

- (Optional) Choose the IAM role for the connector to use to push events to your CloudWatch logs. The following example policy lists the necessary permissions to log events for SFTP connectors.

```

{
  "Version": "2012-10-17",
  "Statement": [{
    "Sid": "SFTPConnectorPermissions",
    "Effect": "Allow",
    "Action": [
      "logs:CreateLogStream",
      "logs:DescribeLogStreams",
      "logs:CreateLogGroup",
      "logs:PutLogEvents"
    ],
    "Resource": [
      "arn:aws:logs:*:*:log-group:/aws/transfer/*"
    ]
  }]
}

```

```
    ]
  }]
}
```

- Provide the following SFTP configuration information.
 - The ARN of a secret in Amazon Secrets Manager that contains the SFTP user's private key or password.
 - The public portion of the host key that is used to identify the external server. You can provide multiple trusted host keys if you like.

The easiest way to provide the SFTP information is to save it to a file. For example, copy the following example text to a file named `testSFTPConfig.json`.

```
// Listing for testSFTPConfig.json
{
  "UserSecretId": "arn:aws-cn::secretsmanager:us-east-2:123456789012:secret:aws/transfer/example-username-key",
  "TrustedHostKeys": [
    "sftp.example.com ssh-rsa AAAAbbbb...EEEE="
  ]
}
```

- Specify a security policy for your connector, entering the security policy name.

Note

The `SecretId` can be either the entire ARN or the name of the secret (*example-username-key* in the previous listing).

Then run the following command to create the connector.


```
aws transfer create-connector --url "sftp://partner-SFTP-server-url" \
--access-role your-IAM-role-for-bucket-access \
--logging-role arn:aws-cn:iam::your-account-id:role/service-role/AWSTransferLoggingAccess \
--sftp-config file:///path/to/testSFTPConfig.json
--security-policy-name security-policy-name
--maximum-concurrent-connections integer-from-1-to-5
```

Test an SFTP connector


After you create an SFTP connector, we recommend that you test it before you attempt to transfer any files using your new connector.


To test an SFTP connector

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **SFTP Connectors**, and select a connector.
3. From the **Actions** menu, choose **Test connection**.

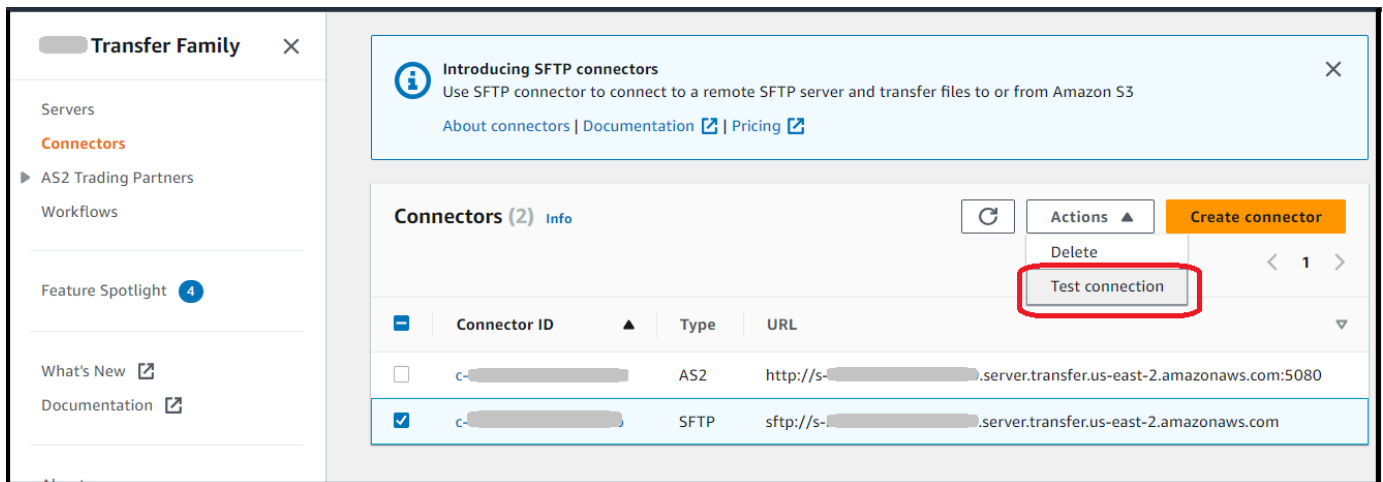

The system returns a message, indicating whether the test passes or fails. If the test fails, the system provides an error message based on the reason the test failed.

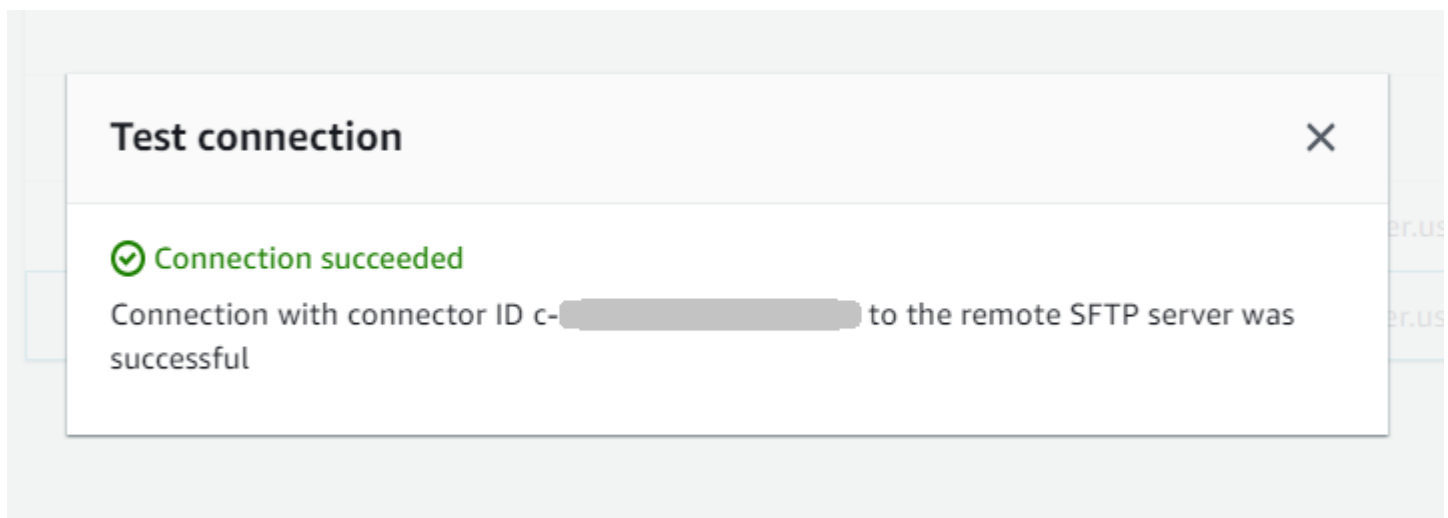

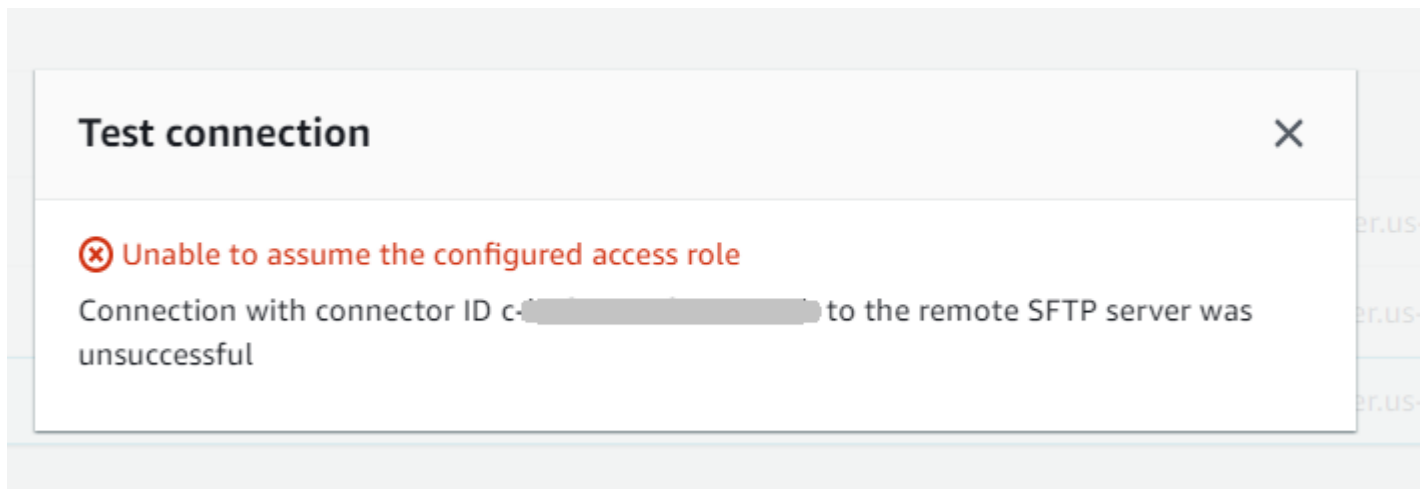**Note**

To use the API to test your connector, see the [TestConnection](#) API documentation.

Using SFTP connectors

This topic describes how to perform the supported file operations using your SFTP connector. You can also find example commands to perform these operations by selecting your connector's details on the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.

After you have created an SFTP connector, you can use it to perform the following file operations on the remote SFTP server that it's associated with.

- Send files from Amazon S3 to the remote SFTP server.
- Retrieve files from the remote SFTP server to Amazon S3.
- List files and sub-folders from a directory on the remote SFTP server.
- Delete, rename or move files and directories on the remote SFTP server.

Note

Currently, SFTP connectors can only be used to connect to remote SFTP servers that offer an internet-accessible endpoint.

For details on creating connectors, see [Creating SFTP connectors](#).

Topics

- [Transfer files](#)
- [List contents of a remote directory](#)
- [Move, rename, or delete files or directories on the remote server](#)

Transfer files

Topics

- [Send and retrieve files by using an SFTP connector](#)

Send and retrieve files by using an SFTP connector

To send and retrieve files by using an SFTP connector, you use the [StartFileTransfer](#) API operation and specify the following parameters, depending on whether you're *sending files* (outbound transfers) or *receiving files* (inbound transfers). Note that each `StartFileTransfer` request can contain 10 distinct paths.

Note

By default, SFTP connectors process one file at a time, transferring files sequentially. You have an option to accelerate transfer performance by having your connectors create concurrent sessions with remote servers that support concurrent sessions from the same user, and process up to 5 files in parallel.

To enable concurrent connections for any connector, you can edit the **Maximum concurrent connections** setting when creating or updating a connector. For details, see [Create an SFTP connector](#).

• Outbound transfers

- `send-file-paths` contains from one to ten source file paths, for files to transfer to the partner's SFTP server.
- `remote-directory-path` is the remote path to send a file to on the customer's SFTP server.

• Inbound transfers

- `retrieve-file-paths` contains from one to ten remote paths. Each path specifies a location for transferring files from the partner's SFTP server to your Transfer Family server.
- `local-directory-path` is the Amazon S3 location (bucket and optional prefix) where your files are stored.

To send files, you specify the `send-file-paths` and `remote-directory-path` parameters. You can specify up to 10 files for the `send-file-paths` parameter. The following example command sends the files named `/amzn-s3-demo-source-bucket/file1.txt` and `/amzn-s3-demo-source-bucket/file2.txt`, located in Amazon S3 storage, to the `/tmp` directory on your partner's SFTP server. To use this example command, replace the *amzn-s3-demo-source-bucket* with your own bucket.

```
aws transfer start-file-transfer --send-file-paths /amzn-s3-demo-source-bucket/
file1.txt /amzn-s3-demo-source-bucket/file2.txt \
  --remote-directory-path /tmp --connector-id c-1111AAAA2222BBBB3 --region us-east-2
```

To retrieve files, you specify the `retrieve-file-paths` and `local-directory-path` parameters. The following example retrieves the files `/my/remote/file1.txt` and `/my/remote/file2.txt` on the partner's SFTP server, and places it in the Amazon S3 location `/amzn-s3-demo-bucket/prefix`. To use this example command, replace the *user input placeholders* with your own information.

```
aws transfer start-file-transfer --retrieve-file-paths /my/remote/file1.txt /my/
remote/file2.txt \
  --local-directory-path /amzn-s3-demo-bucket/prefix --connector-id
c-2222BBBB3333CCCC4 --region us-east-2
```

The previous examples specify absolute paths on the SFTP server. You can also use relative paths: that is, paths that are relative to the SFTP user's home directory. For example, if the SFTP user is `marymajor` and their home directory on the SFTP server is `/users/marymajor/`, the following command sends `/amzn-s3-demo-source-bucket/file1.txt` to `/users/marymajor/test-connectors/file1.txt`

```
aws transfer start-file-transfer --send-file-paths /amzn-s3-demo-source-bucket/
file1.txt \
  --remote-directory-path test-connectors --connector-id c-2222BBBB3333CCCC4 --
region us-east-2
```

List contents of a remote directory

Before you retrieve files from a remote SFTP server, you can retrieve the contents of a directory on the remote SFTP server. To do this, you use the [StartDirectoryListing](#) API operation.

The following example lists the contents of the home folder on the remote SFTP server, which is specified in the connector's configuration. The results are placed into the Amazon S3 location `/amzn-s3-demo-bucket/connector-files`, and into a file named `c-AAAA1111BBBB2222C-6666abcd-11aa-22bb-cc33-0000aaaa3333.json`.

```
aws transfer start-directory-listing \
  --connector-id c-AAAA1111BBBB2222C \
  --output-directory-path /amzn-s3-demo-bucket/example/connector-files \
  --remote-directory-path /home
```

This Amazon CLI command returns a listing ID and the name of the file that contains the results.

```
{
  "ListingId": "6666abcd-11aa-22bb-cc33-0000aaaa3333",
  "OutputFileName": "c-AAAA1111BBBB2222C-6666abcd-11aa-22bb-cc33-0000aaaa3333.json"
}
```

Note

The naming convention for the output file is *connector-ID-listing-ID.json*.

The JSON file contains the following information:

- `filePath`: the complete path of a remote file, relative to the directory of the listing request for your SFTP connector on the remote server.
- `modifiedTimestamp`: the last time the file was modified, in seconds, Coordinated Universal Time (UTC) format. This field is optional. If the remote file attributes don't contain a timestamp, it is omitted from the file listing.
- `size`: the size of the file, in bytes. This field is optional. If the remote file attributes don't contain a file size, it is omitted from the file listing.
- `path`: the complete path of a remote directory, relative to the directory of the listing request for your SFTP connector on the remote server.

- `truncated`: a flag indicating whether the list output contains all of the items contained in the remote directory or not. If your `truncated` output value is true, you can increase the value provided in the optional `max-items` input attribute to be able to list more items (up to the maximum allowed list size of 10,000 items).

The following is an example of the contents of the output file (`c-AAAA1111BBBB2222C-6666abcd-11aa-22bb-cc33-0000aaaa3333.json`), where the remote directory contains two files and two sub-directories (paths).

```
{
  "files": [
    {
      "filePath": "/home/what.txt",
      "modifiedTimestamp": "2024-01-30T20:34:54Z",
      "size" : 2323
    },
    {
      "filePath": "/home/how.pgp",
      "modifiedTimestamp": "2024-01-30T20:34:54Z",
      "size" : 4691
    }
  ],
  "paths": [
    {
      "path": "/home/magic"
    },
    {
      "path": "/home/aws"
    }
  ],
  "truncated": "false"
}
```

Move, rename, or delete files or directories on the remote server

Topics

- [Move or rename files or directories on the remote SFTP server](#)
- [Delete files or directories on the remote SFTP server](#)

Move or rename files or directories on the remote SFTP server

You can use an SFTP connector to move or rename files and directories on a remote SFTP server. Note that the remote server needs to support these operations for successful processing using connectors.

Some common use cases are as follows.

- A remote server generates or receives a new file every hour, with the same filename but a different timestamp. To keep the main folder up to date (so that it contains only the latest file), you can use a connector to move older files to an archived folder.
- You use a connector to list all of the files in a remote directory, then transfer all of the files to your local storage. You can then use a connector to move the files to an archived folder on the remote server.

You must use a `StartRemoteMove` call for each file or directory you want to process, as the command takes a single source and destination file or directory as arguments. However, you can accelerate performance by having your connectors create concurrent sessions with remote servers that support concurrent sessions from the same user, and move/rename up to 5 files in parallel.

The following example moves a file on the remote SFTP server from `/source/folder/sourceFile` to `/destination/targetFile`, and returns a unique identifier for the operation.

```
aws transfer --connector-id c-AAAA1111BBBB2222C start-remote-move \  
  --source-path /source/folder/sourceFile --target-path /destination/targetFile
```

Note

For the move/rename operations, Transfer Family uses the standard SFTP `SSH_FXP_RENAME` command to do the move/rename operation.

Delete files or directories on the remote SFTP server

You can use an SFTP connector to delete files or directories on a remote SFTP server. Note that the remote server needs to support these operations for successful processing using connectors.

Note

Delete operations for remote directories are only supported for empty directories.

Some common use cases are as follows.

- You use a connector to retrieve a file from a remote SFTP server, store it in your Amazon S3 bucket, then encrypt it. Finally, you can use a connector to delete the unencrypted file on the remote server.
- You use a connector to list all of the files in a remote directory, then transfer all of the files to your local storage. You can then use a connector to delete all of the files that you transferred. You could also delete the remote directory if you prefer.

You must use a `StartRemoteDelete` call for each file or directory you want to delete, as the command takes a single file or directory as an argument. However, you can accelerate performance by having your connectors create concurrent sessions with remote servers that support concurrent sessions from the same user, and delete up to 5 files/directories in parallel.

The following example deletes a file on the remote SFTP server in the path `/delete/folder/deleteFile`, and returns a unique identifier for the operation.

```
aws transfer start-remote-delete --connector-id c-AAAA1111BBBB2222C \  
--delete-path /delete/folder/deleteFile
```

Note

For the delete operation, Transfer Family uses the standard `SSH_FXP_REMOVE` command to delete a file, and `SSH_FXP_RMDIR` to delete a directory.

Monitoring SFTP connectors

You can monitor the status of your connector operations using any of the following ways. Choose the approach that meet your needs.

Use the connector API to query the status of file transfer requests

To track the progress of a file transfer operation, you use the [ListFileTransferResults](#) API operation, which returns real-time updates and detailed information on the status of each individual file being transferred in a specific file transfer operation. You specify the file transfer by providing its Connector ID and its Transfer ID. The following example returns a list of files for connector ID a-11112222333344444 and transfer-ID aa1b2c3d4-5678-90ab-cdef-EXAMPLE11111.

```
aws transfer list-file-transfer-results --connector-id a-11112222333344444 --transfer-id a1b2c3d4-5678-90ab-cdef-EXAMPLE11111
```

Note

File transfer results are available up to 7 days after you call the `ListFileTransferResults` API operation.

You can also view logs and events for your file transfer requests that use SFTP connectors. Amazon EventBridge events for Transfer Family are described in [SFTP connector events](#). For how to view Transfer Family CloudWatch log entries, see [Viewing Transfer Family log streams](#).

View SFTP connector events in Amazon EventBridge

For each operation performed by SFTP connectors, Transfer Family automatically generates and sends events to the default event bus in your Amazon EventBridge account. The events contain detailed metadata about the operation, including the operation status. You can subscribe to these events in EventBridge, apply filters on specific event criteria such as operation status, and automatically trigger downstream actions based on the status. For details on the events generated by SFTP connector operations, see [SFTP connector events](#).

View SFTP connector logs in Amazon CloudWatch

All SFTP connector operations generate detailed logs in CloudWatch. For example log entries generated by SFTP connectors, see [Example log entries for SFTP connectors](#).

Managing SFTP connectors

This topic describes how to view and update SFTP connectors.

Note

Each connector is automatically assigned static IP addresses that remain unchanged over the lifetime of the connector. This allows you to connect with remote SFTP servers that only accept inbound connections from known IP addresses. Your connectors are assigned a set of static IP addresses that are shared by all connectors using the same protocol (SFTP or AS2) in your Amazon Web Services account.

Update SFTP connectors

To change the existing parameter values for your connectors, you can run the `update-connector` command. The following command updates the secret for the connector `connector-id`, in the Region `region-id` to `secret-ARN`. To use this example command, replace the *user input placeholders* with your own information.

```
aws transfer update-connector --sftp-config '{"UserSecretId":"secret-ARN"}' \
  --connector-id connector-id --region region-id
```

View SFTP connector details

You can find a list of details and properties for an SFTP connector in the Amazon Transfer Family console.

To view connector details

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Connectors**.
3. Choose the identifier in the **Connector ID** column to see the details page for the selected connector.

You can change the properties for the SFTP connector by choosing **Edit** on the connector details page.

Note

You can get much of this information, albeit in a different format, by running the following Amazon Command Line Interface (Amazon CLI) command. To use this example command, replace the *user input placeholders* with your own information.

```
aws transfer describe-connector --connector-id your-connector-id
```

For more information, see [DescribeConnector](#) in the API reference.

Scaling and quotas for SFTP connectors

Topics

- [Quotas for SFTP connectors](#)
- [Scaling your SFTP connectors](#)

Quotas for SFTP connectors

The following quotas are in place for SFTP connectors.

Note

More service quotas for SFTP connectors are listed in [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*.

SFTP connector quotas

Name	Default	Adjustable
Maximum test connection transactions per second (TPS)	1 request per second, per account	No
Maximum queue size for pending file transfers	1000	No
Maximum file size	150 gibibytes (GiB)	No

Name	Default	Adjustable
Maximum transfer time per file	12 hours	No
Maximum request wait time per file	12 hours	No
Maximum bandwidth for connectors per account (both SFTP and AS2 connectors contribute to this value)	50 MBps	No
Maximum number of items for directory listing operations	10,000	No
Maximum number of files per <code>StartFileTransfer</code> request	10	No

 **Note**

By default, SFTP connectors process one file at a time, transferring files sequentially. You have an option to accelerate transfer performance by having your connectors create concurrent sessions with remote servers that support concurrent sessions from the same user, and process up to 5 files in parallel.

To enable concurrent connections for any connector, you can edit the **Maximum concurrent connections** setting when creating or updating a connector. For details, see [Create an SFTP connector](#).

For storing the credentials for SFTP connectors, there are quotas associated with each Secrets Manager secret. If you use the same secret to store multiple types of keys, for multiple purposes, you may encounter these quotas.

- Total length for a single secret: 12,000 characters

- Maximum length of the **Password** string: 1024 characters
- Maximum length of the **PrivateKey** string: 8192 characters
- Maximum length of the **Username** string: 100 characters

Scaling your SFTP connectors

This section describes considerations for how to scale your Amazon Transfer Family SFTP connector workloads. You need to take into account the following three quotas that apply when you want to scale your workloads with SFTP connectors.

- **The maximum queue size.** This refers to the maximum number of pending operations in a connector's queue that have been requested. A pending operation refers to any previously submitted transfer request that has not yet completed, either successfully or unsuccessfully.

The maximum queue depth for pending requests is currently set at 1,000 per connector (as defined in [Amazon Transfer Family service quotas](#)). Your workloads may exceed this service limit when you request thousands of transfer operations over a short duration, and you will receive a `ThrottlingException` with the message `Exceeded maximum pending requests`. If your workloads are subject to this quota, contact the Transfer Family service team via Amazon Web Services Support or your account team to discuss your scalability requirements.

You can also take either or both of the following actions.

- Distribute your file volumes across multiple connectors.
- Have your connectors create concurrent sessions with the remote server to process multiple requests from the queue in parallel.
- **The number of concurrent sessions.** By default, an SFTP connector transfers one file at a time, transferring files sequentially from its queue.

You have an option to accelerate transfer performance by having your connectors transfer multiple files in parallel. You can create concurrent sessions with remote servers that support concurrent sessions from the same user, and process up to 5 files in parallel. When you create an SFTP connector, choose a value up to 5 for the **Maximum concurrent connections** setting when you create or update the connector. For details, see [Create an SFTP connector](#).

- **The rate of StartFileTransfer requests.** You can request up to 100 file paths per second for transfer with each SFTP connector. The requested file paths are added to your connectors' queue for processing. You can use the `StartFileTransfer` command recursively to request up to 100

file paths per second per connector, irrespective of the number of files provided in an individual `StartFileTransfer` command.

Reference architectures using SFTP connectors

This section lists the reference materials that are available for configuring automated file transfer workflows using SFTP connectors. You can design your own event-driven architectures by using the SFTP connector events in Amazon EventBridge, to orchestrate between your file transfer action and pre- and post-processing actions in Amazon.

Blog posts

The following blog post provides a reference architecture to build an MFT workflow using SFTP connectors, including encryption of files using PGP before sending them to a remote SFTP server using SFTP connectors: [Architecting secure and compliant managed file transfers with Amazon Transfer Family SFTP connectors and PGP encryption.](#)

Workshops

- The following workshop provides hands on labs for configuring SFTP connectors and using your connectors to send or retrieve files from remote SFTP servers: [Transfer Family - SFTP workshop.](#)
- The following workshop provides hands on labs to build fully automated and event-driven workflows involving file transfer to or from external SFTP servers to Amazon S3, and common pre- and post-processing of those files: [Event-driven MFT workshop.](#)

Solutions

Amazon Transfer Family provides the following solutions:

- The [File transfer synchronization solution](#) provides a reference architecture to automate the process of syncing remote SFTP directories—including entire folder structures—with your local Amazon S3 buckets using an SFTP connector. It orchestrates the process of listing remote directories, detecting changes, and transferring new or modified files.
- [Serverlessland - Selective file transfer between remote SFTP server & S3; using Amazon Transfer Family](#) provides a sample pattern for listing files stored on remote SFTP locations, and transferring selective files to Amazon S3.

Amazon Transfer Family for AS2

Applicability Statement 2 (AS2) is an RFC-defined file-transmission specification that includes strong message protection and verification mechanisms. The AS2 protocol is critical to workflows with compliance requirements that rely on having data protection and security features built into the protocol.

Note

AS2 for Transfer Family is [Drummond certified](#).

Customers in industries such as retail, life sciences, manufacturing, financial services, and utilities that rely on AS2 for supply chain, logistics, and payments workflows can use Amazon Transfer Family AS2 endpoints to securely transact with their business partners. The transacted data is natively accessible in Amazon for processing, analysis, and machine learning. This data is also available for integrations with enterprise resource planning (ERP) and customer relationship management (CRM) systems that run on Amazon. With AS2, customers can run their business-to-business (B2B) transactions at scale in Amazon while maintaining existing business partner integrations and compliance.

If you are a Transfer Family customer who wants to exchange files with a partner who has an AS2-enabled server, the setup involves generating one public-private key pair for encryption and another for signing and exchanging the public keys with the partner.

Transfer Family provides a workshop that you can attend, in which you can configure a Transfer Family endpoint with AS2 enabled, and a Transfer Family AS2 connector. You can view the details for this workshop [here](#).

Protecting an AS2 payload in transit typically involves the use of Cryptographic Message Syntax (CMS) and commonly uses encryption and a digital signature to provide data protection and peer authentication. A signed Message Disposition Notice (MDN) response payload provides verification (non-repudiation) that a message was received and successfully decrypted.

Transport of these CMS payloads and MDN responses occurs over HTTP.

Note

HTTPS AS2 server endpoints are not currently supported. TLS termination is currently the responsibility of the customer.


For a detailed, step-by-step walkthrough of setting up an Applicability Statement 2 (AS2) configuration, see the tutorial, [Setting up an AS2 configuration](#).

The user guide provides instructions for each step in the process of configuring AS2 in Transfer Family.

1. [Import AS2 certificates](#)
2. [Create AS2 profiles](#)
3. [Create an AS2 server](#)
4. [Create an AS2 agreement](#)
5. [Configure AS2 connectors](#)

AS2 use cases

If you are an Amazon Transfer Family customer who wants to exchange files with a partner who has an AS2-enabled server, the most complex part of the setup involves generating one public-private key pair for encryption and another for signing and exchanging the public keys with the partner.

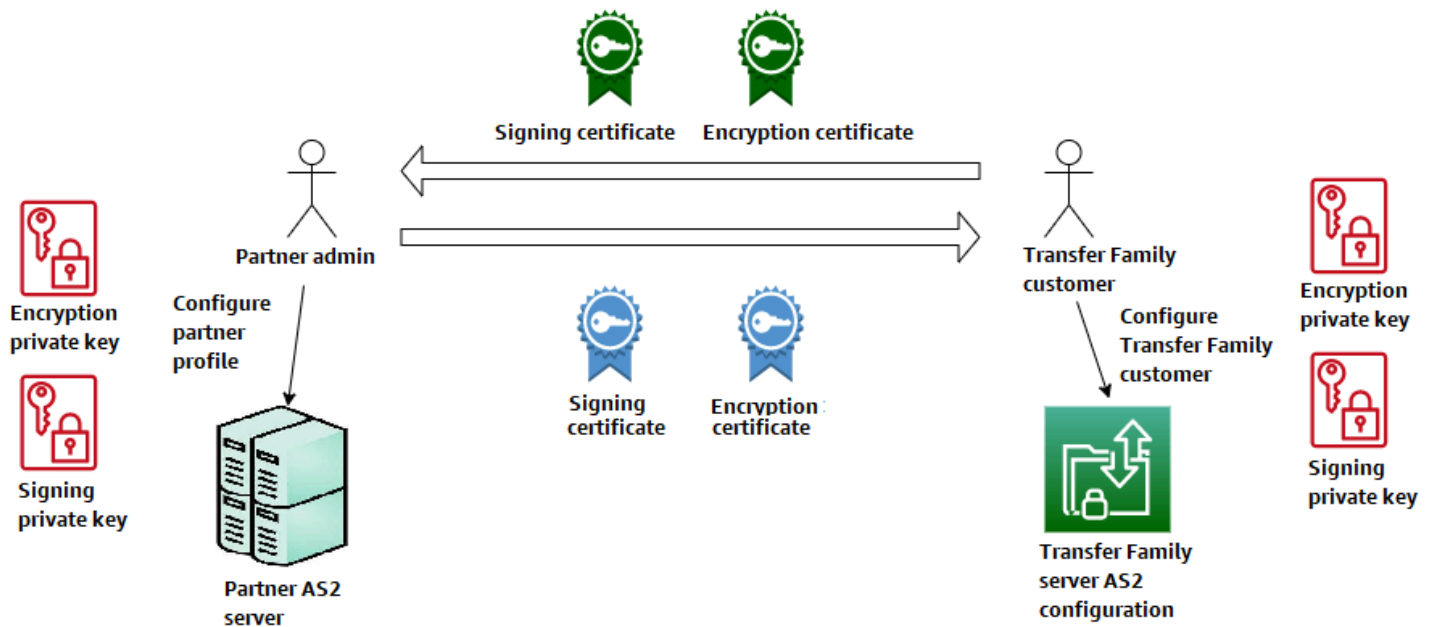

Consider the following variations for using Amazon Transfer Family with AS2.

Note

Trading partner is the partner associated with that partner profile.
All mentions of *MDN* in the following table assume *signed MDNs*.

AS2 use cases

Inbound-only use cases

- **Transfer encrypted AS2 messages from a trading partner to a Transfer Family server.**

In this case, you do the following:

1. Create profiles for your trading partner and yourself.
2. Create a Transfer Family server that uses the AS2 protocol.
3. Create an agreement and add it to your server.
4. Import a certificate with a private key and add it to your profile, and then import the public key to your partner profile for encryption.
5. After you have these items, send the public key for your certificate to your trading partner.

Now your partner can send you encrypted messages and you can decrypt them and store them in your Amazon S3 bucket.

- **Transfer encrypted AS2 messages from a trading partner to a Transfer Family server and add signing.**

In this scenario, you are still doing only inbound transfers, but now you want to have your partner sign the messages that they send. In this case, import the trading partner's signing public key (as a signing certificate added to your partner's profile).

- **Transfer encrypted AS2 messages from a trading partner to a Transfer Family server and add signing and sending an MDN response.**

In this scenario, you are still doing only inbound transfers, but now, in addition to receiving signed payloads, your trading partner wants to receive a signed MDN response.

1. Import your public and private signing keys (as a signing certificate to your profile).
2. Send the public signing key to your trading partner.

Outbound-only use cases

- **Transfer encrypted AS2 messages from a Transfer Family server to a trading partner.**

This case is similar to the inbound-only transfer use case, except that instead of adding an agreement to your AS2 server, you create a connector. In this case, you import your trading partner's public key to their profile.

- **Transfer encrypted AS2 messages from a Transfer Family server to a trading partner and add signing.**

You are still doing only outbound transfers, but now your trading partner wants you to sign the message that you send to them.

1. Import your signing private key (as a signing certificate added to your profile).
2. Send your trading partner your public key.

- **Transfer encrypted AS2 messages from a Transfer Family server to a trading partner and add signing and send an MDN response.**

You are still doing only outbound transfers, but now, in addition to sending signed payloads, you want to receive a signed MDN response from your trading partner.

1. Your trading partner sends you their public signing key.
2. Import your trading partner's public key (as a signing certificate added to your partner profile).

Inbound and outbound use cases

- **Transfer encrypted AS2 messages in both directions between a Transfer Family server and a trading partner.**

In this case, you do the following:

1. Create profiles for your trading partner and yourself.
2. Create a Transfer Family server that uses the AS2 protocol.
3. Create an agreement and add it to your server.
4. Create a connector.
5. Import a certificate with a private key and add it to your profile, and then import the public key to your partner profile for encryption.
6. Receive a public key from your trading partner and add it to their profile for encryption.
7. After you have these items, send the public key for your certificate to your trading partner.

Now you and your trading partner can exchange encrypted messages, and you can both decrypt them. You can store the messages that you receive in your Amazon S3 bucket, and your partner can decrypt and store the messages that you send to them.

- **Transfer encrypted AS2 messages in both directions between a Transfer Family server and a trading partner and add signing.**

Now you and your partner want signed messages.

1. Import your signing private key (as a signing certificate added to your profile).
2. Send your trading partner your public key.
3. Import your trading partner's signing public key and add it to their profile.

- **Transfer encrypted AS2 messages in both directions between a Transfer Family server and a trading partner and add signing and send an MDN response.**

Now, you want to exchange signed payloads, and both you and your trading partner want MDN responses.

1. Your trading partner sends you their public signing key.
2. Import your trading partner's public key (as a signing certificate to your partner profile).
3. Send your public key to your trading partner.

AS2 CloudFormation templates

This topic provides information about Amazon CloudFormation templates that you can use to quickly deploy AS2 servers and configurations for Amazon Transfer Family. These templates automate the setup process and help you implement best practices for AS2 file transfers.

- The basic AS2 template is described in [Use a template to create a demo Transfer Family AS2 stack](#)
- The AS2 template for customizing HTTP headers is described in [Customize HTTP headers for AS2 messages](#).

Customizing AS2 templates

You can customize the provided templates to meet your specific requirements:

1. Download the template from the S3 URL.
2. Modify the YAML code to adjust configurations such as:
 - Security settings and certificate configurations
 - Network architecture and VPC settings
 - Storage options and file handling
 - Monitoring and notification preferences
3. Upload your modified template to your own S3 bucket.
4. Deploy the customized template using the Amazon CloudFormation console or Amazon CLI.

Important

When customizing templates, ensure that you maintain the dependencies between resources and follow security best practices.

Testing your AS2 deployment

After deploying an AS2 server using a template, you can test the configuration:

1. Check the CloudFormation stack outputs for sample commands and endpoint information.

2. Use the Amazon CLI to send a test file:

```
aws s3api put-object --bucket your-bucket-name --key test.txt --body test.txt
aws transfer start-file-transfer --connector-id your-connector-id --send-file-
paths /your-bucket-name/test.txt
```

3. Verify file delivery in the destination S3 bucket.

4. Check CloudWatch logs for successful processing and MDN responses.

For more comprehensive testing, consider using third-party AS2 clients to send files to your Transfer Family AS2 server.

Best practices for AS2 template deployment

Follow these best practices when using AS2 CloudFormation templates:

Security

- Use strong certificates and rotate them regularly.

- Implement least-privilege IAM policies.

- Restrict network access using security groups.

Reliability

- Deploy across multiple Availability Zones.

- Implement monitoring and alerting for failed transfers.

- Set up automated retries for failed transfers.

Performance

- Choose appropriate instance types for your transfer volume.

- Implement S3 lifecycle policies for efficient file management.

- Monitor and optimize network configurations.

Cost Optimization

- Use auto-scaling for variable workloads.

- Implement S3 storage classes for older files.

Monitor and adjust resources based on actual usage.


Configuring AS2

To create an AS2-enabled server, you must also specify the following components:

- **Agreements** – Bilateral trading partner *agreements*, or partnerships, define the relationship between the two parties that are exchanging messages (files). To define an agreement, Transfer Family combines server, local profile, partner profile, and certificate information. Transfer Family AS2-inbound processes use agreements.
- **Certificates** – *Public key (X.509) certificates* are used in AS2 communication for message encryption and verification. Certificates are also used for connector endpoints.
- **Local profiles and partner profiles** – A *local profile* defines the local (AS2-enabled Transfer Family server) organization or "party." Similarly, a *partner profile* defines the remote partner organization, external to Transfer Family.

While not required for all AS2-enabled servers, for outbound transfers, you need a **connector**. A connector captures the parameters for an outbound connection. The connector is required for sending files to a customer's external, non Amazon server.

The following diagram shows the relationship between the AS2 objects involved in the inbound and outbound processes.

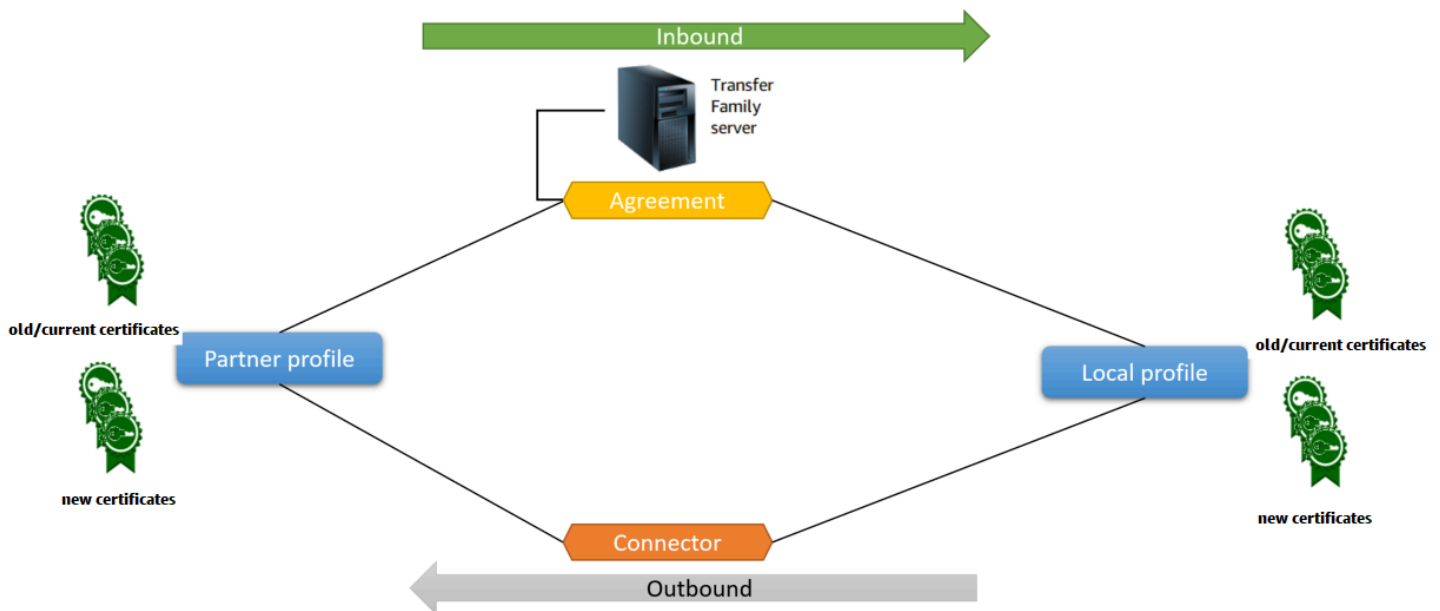

For an end-to-end example AS2 configuration, see [Setting up an AS2 configuration](#).

Topics

- [AS2 configurations](#)
- [AS2 quotas and limitations](#)
- [AS2 features and capabilities](#)

AS2 configurations

This topic describes the supported configurations, features, and capabilities for transfers that use the Applicability Statement 2 (AS2) protocol, including the accepted ciphers and digests.

Signing, encryption, compression, MDN

For both inbound and outbound transfers, the following items are either required or optional:

- **Encryption** – Required (for HTTP transport, which is the only transport method currently supported). Unencrypted messages are only accepted if forwarded by a TLS-terminating proxy such as an Application Load Balancer (ALB) and the X-Forwarded-Proto: https header is present.
- **Signing** – Optional
- **Compression** – Optional (the only currently supported compression algorithm is ZLIB)
- **Message Disposition Notice (MDN)** – Optional

Ciphers

The following ciphers are supported for both inbound and outbound transfers:

- AES128_CBC
- AES192_CBC
- AES256_CBC
- 3DES (for backward compatibility only)

Digests

The following digests are supported:

- **Inbound signing and MDN** – SHA1, SHA256, SHA384, SHA512
- **Outbound signing and MDN** – SHA1, SHA256, SHA384, SHA512

MDN

For MDN responses, certain types are supported, as follows:

- **Inbound transfers** – Synchronous and asynchronous
- **Outbound transfers** – Synchronous only
- **Simple Mail Transfer Protocol (SMTP) (email MDN)** – Not supported

Transports

- **Inbound transfers** – HTTP is the only currently supported transport, and you must specify it explicitly.

Note

If you need to use HTTPS for inbound transfers, you can terminate TLS on an Application Load Balancer or a Network Load Balancer. This is described in [Receive AS2 messages over HTTPS](#).

- **Outbound transfers** – If you provide an HTTP URL, you must also specify an encryption algorithm. If you provide an HTTPS URL, you have the option of specifying **NONE** for your encryption algorithm.

AS2 quotas and limitations

This section discusses quotas and limitations for AS2

Topics

- [AS2 quotas](#)
- [Quotas for handling secrets](#)
- [Known limitations](#)

AS2 quotas

The following quotas are in place for AS2 file transfers. To request an increase for a quota that's adjustable, see [Amazon Web Services service quotas](#) in the *Amazon Web Services General Reference*.

AS2 quotas

Name	Default	Adjustable
Maximum number of inbound files received per second	100	No
Maximum number of outbound files sent per second	100	No
Maximum number of concurrent inbound files	400	No
Maximum number of concurrent outbound files	400	No
Maximum size of inbound file (uncompressed)	1 GB	No
Maximum size of outbound file (uncompressed)	1 GB	No
Maximum number of files per outbound request	10	No
Maximum number of outbound requests per second	100	No
Maximum number of inbound requests per second	100	No
Maximum outbound bandwidth per account (outbound SFTP and AS2)	50 MB per second	No

Name	Default	Adjustable
requests both contribute to this value)		
Maximum number of agreements per server	100	Yes
Maximum number of connectors per account (SFTP and AS2 connectors both contribute to this limit)	100	Yes
Maximum number of certificates per partner profile	10	No
Maximum number of certificates per account	1000	Yes
Maximum number of partner profiles per account	1000	Yes

Quotas for handling secrets

Amazon Transfer Family makes calls to Amazon Secrets Manager on behalf of AS2 customers that are using Basic authentication. Additionally Secrets Manager makes calls to Amazon KMS.

Note

These quotas aren't specific to your use of secrets for Transfer Family: they're shared among all the services in your Amazon Web Services account.

For Secrets Manager `GetSecretValue`, the quota that applies is **Combined rate of DescribeSecret and GetSecretValue API requests**, as described in [Amazon Secrets Manager quotas](#).

Secrets Manager GetSecretValue

Name	Value	Description
Combined rate of DescribeSecret and GetSecretValue API requests	Each supported Region: 10,000 per second	The maximum transactions per second for DescribeSecret and GetSecretValue API operations combined.

For Amazon KMS, the following quotas apply for Decrypt. For details, see [Request quotas for each Amazon KMS API operation](#)

Amazon KMS Decrypt

Quota name	Default value (requests per second)
Cryptographic operations (symmetric) request rate	<p>These shared quotas vary with the Amazon Web Services Region and the type of Amazon KMS key used in the request. Each quota is calculated separately.</p> <ul style="list-style-type: none"> 5,500 (shared) 10,000 (shared) in the following Regions: <ul style="list-style-type: none"> US East (Ohio), us-east-2 Asia Pacific (Singapore), ap-southeast-1 Asia Pacific (Sydney), ap-southeast-2 Asia Pacific (Tokyo), ap-northeast-1 Europe (Frankfurt), eu-central-1 Europe (London), eu-west-2 50,000 (shared) in the following Regions: <ul style="list-style-type: none"> US East (N. Virginia), us-east-1 US West (Oregon), us-west-2 Europe (Ireland), eu-west-1

Quota name	Default value (requests per second)
Custom key store request quotas <div data-bbox="115 304 792 520" style="border: 1px solid #ccc; border-radius: 10px; padding: 10px; margin-top: 10px;"> <p>Note</p> <p>This quota only applies if you are using an external key store.</p> </div>	Custom key store request quotas are calculated separately for each custom key store. <ul style="list-style-type: none"> • 1,800 (shared) for each Amazon CloudHSM key store • 1,800 (shared) for each external key store

Known limitations

- Server-side TCP keep-alive is not supported. The connection times out after 350 seconds of inactivity unless the client sends keep-alive packets.
- For an active agreement to be accepted by the service and appear in Amazon CloudWatch logs, messages must contain valid AS2 headers.
- The server that's receiving messages from Amazon Transfer Family for AS2 must support the Cryptographic Message Syntax (CMS) algorithm protection attribute for validating message signatures, as defined in [RFC 6211](#). This attribute is not supported in some older IBM Sterling products.
- Duplicate message IDs result in a processed/Warning: duplicate-document message.
- The key length for AS2 certificates must be at least 2048 bits, and at most 4096.
- When sending AS2 messages or asynchronous MDNs to a trading partner's HTTPS endpoint, the messages or MDNs must use a valid SSL certificate that's signed by a publicly trusted certificate authority (CA). Self-signed certificates are currently supported for outbound transfers only.
- The endpoint must support the TLS version 1.2 protocol and a cryptographic algorithm that's permitted by the security policy (as described in [Security policies for Amazon Transfer Family servers](#)).
- Multiple attachments and certificate exchange messaging (CEM) from AS2 version 1.2 is not currently supported.
- Basic authentication is currently supported for outbound messages only.
- You can attach a file-processing workflow to a Transfer Family server that uses the AS2 protocol: however, AS2 messages don't execute workflows attached to the server.

AS2 features and capabilities

The following tables list the features and capabilities available for Transfer Family resources that use AS2.

AS2 features

Transfer Family offers the following features for AS2.

Feature	Supported by Amazon Transfer Family
Drummond certification	Yes
Amazon CloudFormation support	Yes
Amazon CloudWatch metrics	Yes
SHA-2 cryptographic algorithms	Yes
Support for Amazon S3	Yes
Support for Amazon EFS	No
Scheduled Messages	Yes ¹
Amazon Transfer Family Managed Workflows	No
Certificate Exchange Messaging (CEM)	No
Mutual TLS (mTLS)	No
Support for self-signed certificates	Yes

1. Outbound Scheduled Messages available by [scheduling Amazon Lambda functions using Amazon EventBridge](#)

AS2 send and receive capabilities

The following table provides a list of Amazon Transfer Family AS2 send and receive capabilities.

Capability	Inbound: Receiving with server	Outbound: Sending with connector
TLS Encrypted Transport (HTTPS)	Yes ¹	Yes
Non-TLS Transport (HTTP)	Yes	Yes ²
Synchronous MDN	Yes	Yes
Message Compression	Yes	Yes
Asynchronous MDN	Yes	No
Static IP Address	Yes	Yes
Bring Your Own IP Address	Yes	No
Multiple File Attachments	No	No
Basic Authentication	No	Yes
AS2 Restart	Not applicable	No
AS2 Reliability	No	No
Custom Subject per Message	Not applicable	No

1. Inbound TLS Encrypted Transport available with Network Load Balancer (NLB) or Application Load Balancer (ALB)

2. Outbound non-TLS Transport available only when encryption is enabled

Manage AS2 certificates

This topic discusses how to import and manage AS2 certificates. Importing certificates is the first step in the AS2 process for Transfer Family.

1. Import certificates
2. [Create AS2 profiles](#)

3. [Create an AS2 server](#)
4. [Create an AS2 agreement](#)
5. [Configure AS2 connectors](#)

Import AS2 certificates

The Transfer Family AS2 process uses certificate keys for both encryption and signing of transferred information. Partners can use the same key for both purposes, or a separate key for each. If you have common encryption keys kept in escrow by a trusted third-party so that data can be decrypted in the event of a disaster or security breach, we recommend having separate signing keys. By using separate signing keys (which you do not escrow), you don't compromise the non-repudiation features of your digital signatures.

Note

The key length for AS2 certificates must be at least 2048 bits, and at most 4096.

The following points detail how AS2 certificates are used during the process.

- Inbound AS2
 - The trading partner sends their public key for the signing certificate, and this key is imported to the partner profile.
 - The local party sends the public key for their encryption and signing certificates. The partner then imports the private key or keys. The local party can send separate certificate keys for signing and encryption, or can choose to use the same key for both purposes.
- Outbound AS2
 - The partner sends the public key for their encryption certificate, and this key is imported to the partner profile.
 - The local party sends the public key for the certificate for signing, and imports the private key of the certificate for signing.
 - If you are using HTTPS, you can import a self-signed Transport Layer Security (TLS) certificate.

For details on how to create certificates, see [the section called “Step 1: Create certificates for AS2”](#).

This procedure explains how to import certificates by using the Transfer Family console. If you want to use the Amazon CLI instead, see [the section called “Step 3: Import certificates as Transfer Family certificate resources”](#).

To specify an AS2-enabled certificate

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, under **AS2 Trading Partners**, choose **Certificates**.
3. Choose **Import certificate**.
4. In the **Certificate configuration** section, for **Certificate description**, enter an easily identifiable name for the certificate. Make sure that you can identify the certificate's purpose by its description. Additionally, choose the role for the certificate.
5. In the **Certificate usage** section, choose the purpose for this certificate. It can be used for encryption, signing, or both.

Tip: If you choose **Encryption and signing** for the usage, Transfer Family creates two identical certificates (each having their own ID): one with a usage value of ENCRYPTION and one with a usage value of SIGNING.

6. In the **Certificate contents** section, provide a public certificate from a trading partner, or the public and private keys for a local certificate.

Fill in the **Certificate contents** section with the appropriate details.

- If you choose **Self-signed certificate**, you do not provide the certificate chain.
 - Paste the certificate text and its chain into the **Certificate and Certificate chain** field.
 - If this certificate is a local certificate, paste in its private key.
7. Choose **Import certificate** to complete the process and save the details for the imported certificate.

Note

TLS certificates can only be imported as a partner's public certificate. If you select **Public certificate from a partner**, and then select **Transport Layer Security (TLS)** for the usage, you receive a warning. Also, TLS certificates must be self-signed (that is, you must select **Self Signed Certificate** to import a TLS certificate).

AS2 certificate rotation

Often, certificates are valid for a period of six months to a year. You might have set up profiles that you want to persist for a longer duration. To facilitate this, Transfer Family provides certificate rotation. You can specify multiple certificates for a profile, allowing you to keep using the profile for multiple years. Transfer Family uses certificates for signing (optional) and encryption (mandatory). You can specify a single certificate for both purposes, if you like.

Certificate rotation is the process of replacing an old expiring certificate with a newer certificate. The transition is a gradual one to avoid disrupting transfers where a partner in the agreement has yet to configure a new certificate for outbound transfers or might be sending payloads that are signed or encrypted with an old certificate during a period when a newer certificate might also be in use. The intermediate period where both old and new certificates are valid is referred to as a *grace period*.

X.509 certificates have `Not Before` and `Not After` dates. However, these parameters might not provide enough control for administrators. Transfer Family provides `Active Date` and `Inactive Date` settings to control which certificate is used for outbound payloads and which is accepted for inbound payloads.

Outbound certificate selection uses the maximum value that is prior to the date of the transfer as an `Inactive Date`. Inbound processes accept certificates within the range of `Not Before` and `Not After` and within the range of `Active Date` and `Inactive Date`.

The following table describes one possible way to configure two certificates for a single profile.

Two certificates in rotation

Name	NOT BEFORE (controlled by certificate authority)	ACTIVE DATE (set by Transfer Family)	INACTIVE DATE (set by Transfer Family)	NOT AFTER (set by certificate authority)
Cert1 (older certificate)	2019-11-01	2020-01-01	2020-12-31	2024-01-01
Cert2 (newer certificate)	2020-11-01	2020-06-01	2021-06-01	2025-01-01

Note the following:

- When you specify an `Active Date` and `Inactive Date` for a certificate, the range must be inside the range between `Not Before` and `Not After`.
- We recommend that you configure several certificates for each profile, making sure that the active date range for all the certificates combined covers the amount of time for which you want to use the profile.
- We recommend that you specify some grace time between when your older certificate becomes inactive and when your newer certificate becomes active. In the preceding example, the first certificate does not become inactive until 2020-12-31, while the second certificate becomes active on 2020-06-01, providing a 6-month grace period. During the period from 2020-06-01 until 2020-12-31, both certificates are active.

Create AS2 profiles

This topic discusses how to create profiles for use in the AS2 process. A *local profile* defines the local (AS2-enabled Transfer Family server) organization or "party." Similarly, a *partner profile* defines the remote partner organization, external to Transfer Family.

1. [Import AS2 certificates](#)
2. Create AS2 profiles
3. [Create an AS2 server](#)
4. [Create an AS2 agreement](#)
5. [Configure AS2 connectors](#)

Use this procedure to create both local and partner profiles. This procedure explains how to create AS2 profiles by using the Transfer Family console. If you want to use the Amazon CLI instead, see [the section called "Step 3: Create profiles for you and your trading partner"](#).

To create an AS2 profile

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, under **AS2 Trading Partners**, choose **Profiles**, then choose **Create profile**.

3. In the **Profile configuration** section, enter the AS2 ID for the profile. This value is used for the AS2 protocol-specific HTTP headers `as2-from` and `as2-to` to identify the trading partnership, which determines the certificates to use, and so on.
4. In the **Profile type** section, choose **Local profile** or **Partner profile**.
5. In the **Certificates** section, choose one or more certificates from the dropdown menu.

Tip: If you want to import a certificate that is not listed in the dropdown menu, select **Import a new Certificate**. This opens a new browser window at the **Import certificate** screen. For the procedure about importing certificates see [Import AS2 certificates](#).
6. (Optional) In the **Tags** section, specify one or more key-value pairs to help identify this profile.
7. Choose **Create profile** to complete the process and save the new profile.

Create an AS2 server

This topic provides instructions for creating an AS2-enabled Transfer Family server, using either the console or a Amazon CloudFormation template. For an end-to-end example AS2 configuration, see [Setting up an AS2 configuration](#). After you create an AS2 server, you can add an agreement to the server.

1. [Import AS2 certificates](#)
2. [Create AS2 profiles](#)
3. Create an AS2 server
4. [Create an AS2 agreement](#)
5. [Configure AS2 connectors](#)

Topics

- [Create an AS2 server using the Transfer Family console](#)
- [Use a template to create a demo Transfer Family AS2 stack](#)
- [Create an AS2 agreement](#)

Create an AS2 server using the Transfer Family console

This procedure explains how to create an AS2-enabled server by using the Transfer Family console. If you want to use the Amazon CLI instead, see [the section called “Step 4: Create a Transfer Family server that uses the AS2 protocol”](#).

Note

You can attach a file-processing workflow to a Transfer Family server that uses the AS2 protocol: however, AS2 messages don't execute workflows attached to the server.

To create an AS2-enabled server

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Servers**, and then choose **Create server**.
3. On the **Choose protocols** page, select **AS2 (Applicability Statement 2)**, and then choose **Next**.
4. On the **Choose an identity provider** page, choose **Next**.

Note

For AS2, you cannot choose an identity provider because basic authentication is not supported for the AS2 protocol. Instead, you control access through virtual private cloud (VPC) security groups.

5. On the **Choose an endpoint** page, do the following:

Choose an endpoint

Endpoint configuration [Info](#)

Endpoint type
Select whether the endpoint will be publicly accessible or hosted inside your VPC

Publicly accessible
Accessible over the internet

VPC hosted [Info](#)
Access controlled using Security Groups

Access [Info](#)

Internal

Internet Facing

VPC
Select a VPC ID

FIPS Enabled
Select whether the endpoint should comply with Federal Information Processing Standards (FIPS)

FIPS Enabled endpoint

- a. For **Endpoint type**, choose **VPC hosted** to host your server's endpoint. For information about setting up your VPC-hosted endpoint, see [Create a server in a virtual private cloud](#).

Note


Publicly accessible endpoints are not supported for the AS2 protocol. To make your VPC endpoint accessible over the internet, choose **Internet Facing** under **Access**, and then supply your Elastic IP addresses.

- b. For **Access**, choose one of the following options:

- **Internal** – Choose this option to provide access from within your VPC and VPC-connected environments, such as an on-premises data center over Amazon Direct Connect or VPN.
- **Internet Facing** – Choose this option to provide access over the internet and from within your VPC and VPC-connected environments, such as an on-premises data center over Amazon Direct Connect or VPN.

If you choose **Internet Facing**, supply your Elastic IP addresses when prompted.

- c. For **VPC**, either choose an existing VPC or choose **Create VPC** to create a new VPC.
- d. For **FIPS Enabled**, keep the **FIPS Enabled endpoint** check box cleared.


 **Note**

FIPS-enabled endpoints are not supported for the AS2 protocol.

- e. Choose **Next**.
6. On the **Choose a domain** page, choose **Amazon S3** to store and access your files as objects by using the selected protocol.

Choose **Next**.

7. On the **Configure additional details** page, choose the settings that you need.

 **Note**

If you are configuring any other protocols along with AS2, all of the additional detail settings apply. However, for the AS2 protocol, the only settings that apply are those in the **CloudWatch logging** and **Tags** sections.

Even though setting up a CloudWatch logging role is optional, we highly recommend setting it up so that you can see the status of your messages and troubleshoot configuration issues.

8. On the **Review and create** page, review your choices to make sure they are correct.
 - If you want to edit any of your settings, choose **Edit** next to the step that you want to change.

Note

If you edit a step, we recommend that you review each step after the step that you chose to edit.

- If you have no changes, choose **Create server** to create your server. You are taken to the **Servers** page, shown following, where your new server is listed.

It can take several minutes before the status for your new server changes to **Online**. At that point, your server can perform file operations for your users.

Use a template to create a demo Transfer Family AS2 stack

We supply a self-contained, Amazon CloudFormation template to quickly create an AS2-enabled Transfer Family server. The template configures the server with a public Amazon VPC endpoint, certificates, local and partner profiles, an agreement, and a connector.

The basic AS2 server template creates the following resources:


- An AS2-enabled Transfer Family server with a VPC endpoint
- Local and partner AS2 profiles with certificates
- An agreement between the profiles
- An Amazon S3 bucket for file storage
- Required IAM roles and policies
- CloudWatch logging configuration

Before using this template, note the following:

- If you create a stack from this template, you will be billed for the Amazon resources that are used.
- The template creates multiple certificates and places them in Amazon Secrets Manager to store them securely. You can delete these certificates from Secrets Manager if you want, because you're charged for using this service. Deleting these certificates in Secrets Manager doesn't delete them from the Transfer Family server. Therefore, the functionality of the demo stack isn't affected. However, for certificates that you're going to use with a production AS2 server, you might want to use Secrets Manager to manage and periodically rotate your stored certificates.

- We recommend that you use the template as a base only, and mainly for demonstration purposes. If you want to use this demo stack in production, we recommend that you modify the template's YAML code to create a more robust stack. For example, create production-level certificates, and create an Amazon Lambda function that you can use in production.

To create an AS2-enabled Transfer Family server from a CloudFormation template

1. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
 2. In the left navigation pane, choose **Stacks**.
 3. Choose **Create stack**, and then choose **With new resources (standard)**.
 4. In the **Prerequisite - Prepare template** section, choose **Choose an existing template**.
 5. Copy this link, [AS2 demo template](#), and paste it into the **Amazon S3 URL** field.
 6. Choose **Next**.
 7. On the **Specify stack details** page, name your stack, and then specify the following parameters:
 - Under **AS2**, enter values for **Local AS2 ID** and **Partner AS2 ID**, or accept the defaults, `local` and `partner`, respectively.
 - Under **Network**, enter a value for **Security group ingress CIDR IP**, or accept the default, `0.0.0.0/0`.
-  **Note**
- This value, in CIDR format, specifies which IP addresses are allowed for incoming traffic to the AS2 server. The default value, `0.0.0.0/0`, allows all IP addresses.
- Under **General**, enter a value for **Prefix**, or accept the default, `transfer-as2`. This prefix is placed before any resource names that are created by the stack. For example, if you use the default prefix, your Amazon S3 bucket is named `transfer-as2-amzn-s3-demo-bucket`.
 8. Choose **Next**. On the **Configure stack options** page, choose **Next** again.
 9. Review the details for the stack that you're creating, and then choose **Create stack**.

Note

At the bottom of the page, under **Capabilities**, you must acknowledge that Amazon CloudFormation might create Amazon Identity and Access Management (IAM) resources.

After the stack is created, you can send a test AS2 message from the partner server to your local Transfer Family server by using the Amazon Command Line Interface (Amazon CLI). A sample Amazon CLI command for sending a test message is created along with all of the other resources in the stack.

To use this sample command, go to the **Outputs** tab of your stack, and copy the **TransferExampleAs2Command**. You can then run the command by using the Amazon CLI. If you haven't already installed the Amazon CLI, see [Installing or updating the latest version of the Amazon CLI](#) in the *Amazon Command Line Interface User Guide*.

The sample command has the following format:

```
aws s3api put-object --bucket amzn-s3-demo-bucket --key test.txt && aws transfer start-file-transfer --region aws-region --connector-id TransferConnectorId --send-file-paths /amzn-s3-demo-bucket/test.txt
```

Note

Your version of this command contains the actual values for the *amzn-s3-demo-bucket* and *TransferConnectorId* resources in your stack.

This sample command consists of two separate commands that are chained together by using the `&&` string.

The first command creates a new, empty text file in your bucket:

```
aws s3api put-object --bucket amzn-s3-demo-bucket --key test.txt
```

Then, the second command uses the connector to send the file from the partner profile to the local profile. The Transfer Family server has an agreement set up that allows the local profile to accept messages from the partner profile.

```
aws transfer start-file-transfer --region aws-region --connector-id TransferConnectorId
--send-file-paths /amzn-s3-demo-bucket/test.txt
```

After you run the command, you can go to your Amazon S3 bucket (*amzn-s3-demo-bucket*) and view the contents. If the command is successful, you should see the following objects in your bucket:

- *processed/* – This folder contains a JSON file that describes the transferred file and the MDN response.
- *processing/* – This folder temporarily contains files as they are being processed, but after a transfer is completed, this folder should be empty.
- *server-id/* – This folder is named based on your Transfer Family server ID. It contains *from-partner* (this folder is dynamically named, based on the partner's AS2 ID), which itself contains *failed/*, *processed/*, and *processing/* folders. The */server-id/from-partner/processed/* folder contains a copy of the transferred text file, and the corresponding JSON and MDN files.
- *test.txt* – This object is the (empty) file that was transferred.

Create an AS2 agreement

Agreements are associated with Transfer Family servers. They specify the details for trading partners that use the AS2 protocol to exchange messages or files by using Transfer Family, for *inbound* transfers—sending AS2 files from an external, partner-owned source to a Transfer Family server.

This procedure explains how to create AS2 agreements by using the Transfer Family console. If you want to use the Amazon CLI instead, see [the section called “Step 5: Create an agreement between you and your partner”](#).

To create an agreement for a Transfer Family server

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.

2. In the left navigation pane, choose **Servers**, and then choose a server that uses the AS2 protocol.

As an alternative, as long as you have at least one Transfer Family server that uses the AS2 protocol, select **Agreements to receive messages** from the **AS2 Trading Partners** menu. Then, in the **Create agreement** screen, select the AS2 server to which you want to associate this agreement.

3. On the server details page, scroll down to the **Agreements** section.
4. Choose **Add agreement**.
5. Fill in the agreement parameters, as follows:
 - a. In the **Agreement configuration** section, enter a descriptive name. Make sure that you can identify the agreement's purpose by its name. Also, set the **Status** for the agreement: either **Active** (selected by default) or **Inactive**.
 - b. In the **Communication configuration** section, choose a local profile and a partner profile. Also, choose whether or not to enforce message signing.
 - By default, **Enforce message signing** is enabled, which means that Transfer Family rejects unsigned messages from your trading partner for this agreement.
 - Clear this setting to allow Transfer Family to accept unsigned messages from your trading partner for this agreement.
 - c. In the **Inbox directory configuration** section, provide the following information.
 - Determine whether or not to select **Specify separate directories to store your AS2 messages, MDN files, and JSON status files**.
 - If you select this option, you specify separate locations for payload files, failed files, MDN files, status files, and temporary files.
 - If you clear this option, all AS2 files go into the location that you specify for your base directory.
 - For **S3 Bucket**, choose an Amazon S3 bucket.
 - For **Prefix**, you can enter a prefix (folder) to use for storing files in the bucket.

For example, if you enter **amzn-s3-demo-bucket** for your bucket and **incoming** for your prefix, your AS2 files are saved to the **/amzn-s3-demo-bucket/incoming** folder.

- For **Amazon IAM Role**, choose a role that can access the bucket you specified.

- For **Preserve filename**, choose whether to preserve original filenames for incoming AS2 message payloads.
 - If you select this setting, the filename provided by your trading partner is preserved when the file is saved in Amazon S3.
 - If you clear this setting, when Transfer Family saves the file, the filename is adjusted, as described in [File names and locations](#).
- d. (Optional) Add tags in the **Tags** section.
- e. After you have entered all the information for the agreement, choose **Create agreement**.

The new agreement appears in the **Agreements** section of the server details page.

Configure AS2 connectors

The purpose of a connector is to establish a relationship between trading partners for *outbound* transfers—sending AS2 files from a Transfer Family server to an external, partner-owned destination. For the connector, you specify the local party, the remote partner, and their certificates (by creating local and partner profiles).

After you have a connector in place, you can transfer information to your trading partners. Each AS2 server is assigned three static IP addresses. AS2 connectors use these IP addresses for sending asynchronous MDNs to your trading partners over AS2.

Note

The message size received by a trading partner will not match the object size in Amazon S3. This discrepancy occurs because the AS2 message wraps the file in an envelope prior to sending. So, the file size might increase, even if the file is sent with compression. Therefore, make sure that the trading partner's maximum file size is greater than the size of the file that you are sending.


1. [Import AS2 certificates](#)
2. [Create AS2 profiles](#)
3. [Create an AS2 server](#)
4. [Create an AS2 agreement](#)

5. Create an AS2 connector

Create an AS2 connector

This procedure explains how to create AS2 connectors by using the Amazon Transfer Family console. If you want to use the Amazon CLI instead, see [the section called “Step 6: Create a connector between you and your partner”](#).

To create an AS2 connector

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
 2. In the left navigation pane, choose **Connectors to send messages**, from the **AS2 Trading Partners** menu, and then choose **Create AS2 connector**.
 3. In the **Connector configuration** section, specify the following information:
 - **URL** – Enter the URL for outbound connections.
 - **Access role** – Choose the Amazon Resource Name (ARN) of the Amazon Identity and Access Management (IAM) role to use. Make sure that this role provides read and write access to the parent directory of the file location that's used in the `StartFileTransfer` request. Additionally, make sure that the role provides read and write access to the parent directory of the files that you intend to send with `StartFileTransfer`.
-  **Note**
- If you're using Basic authentication for your connector, the access role requires the `secretsmanager:GetSecretValue` permission for the secret. If the secret is encrypted by using a customer managed key instead of the Amazon managed key in Amazon Secrets Manager, then the role also needs the `kms:Decrypt` permission for that key. If you name your secret with the prefix `aws/transfer/`, you can add the necessary permission with a wildcard character (`*`), as shown in [Example permission to create secrets](#).
- **Logging role** (optional) – Choose the IAM role for the connector to use to push events to your CloudWatch logs.
 4. In the **AS2 configuration** section, choose the local and partner profiles, the encryption and signing algorithms, and whether to compress the transferred information. Note the following:

- The **Preserve S3 Content-Type** parameter is enabled by default.

When set, Transfer Family uses the Amazon S3 Content-Type that is associated with objects in S3 instead of having the content type mapped based on the file extension. Clear this setting if you want the service to map content type for your AS2 messages based on file extension, rather than using the content type from the S3 object.

- For the encryption algorithm, do not choose DES_EDE3_CBC unless you must support a legacy client that requires it, as it is a weak encryption algorithm.
 - The **Subject** is used as the subject HTTP header attribute in AS2 messages that are being sent with the connector.
 - If you choose to create a connector without an encryption algorithm, you must specify HTTPS as your protocol.
5. In the **Basic authentication** section, specify the following information.
- To send sign-on credentials along with outbound messages, select **Enable Basic authentication**. If you don't want to send any credentials with outbound messages, keep **Enable Basic authentication** cleared.
 - If you're using authentication, choose or create a secret.
 - To create a new secret, choose **Create a new secret** and then enter a username and password. These credentials must match the user that connects to the partner's endpoint.

Basic authentication [Info](#)

Enable Basic authentication - optional
Select this option to authenticate with your trading partner's host using username and password credentials.


Basic authentication credentials [Info](#)
Choose the username and password credentials that will be used to authenticate with your trading partner's host.

Create a new secret

Choose an existing secret

Username

Password

[?](#) Update the access role associated with your connector to provide  Transfer Family with permission to read the secret containing your Basic authentication credentials.

- To use an existing secret, choose **Choose an existing secret**, and then choose a secret from the dropdown menu. For the details of creating a correctly formatted secret in Secrets Manager, see [Enable Basic authentication for AS2 connectors](#).


Basic authentication [Info](#)

Enable Basic authentication - optional
Select this option to authenticate with your trading partner's host using username and password credentials.



Basic authentication credentials [Info](#)
Choose the username and password credentials that will be used to authenticate with your trading partner's host.


Create a new secret


Choose an existing secret



Q |

aws/transfer/ 
SFTP connector 

aws/transfer/sftp-connector1
Secret key 

aws/transfer/c- 

or to provide AWS Transfer Family with permission to read the secret containing your Basic authentication credentials.

- In the **MDN configuration** section, specify the following information:

- **Request MDN** – You have the option to require your trading partner to send you an MDN after they have successfully received your message over AS2.
 - **Signed MDN** – You have the option to require that MDNs be signed. This option is available only if you have selected **Request MDN**.
7. After you've confirmed all of your settings, choose **Create AS2 connector** to create the connector.

The **Connectors** page appears, with the ID of your new connector added to the list. To view the details for your connectors, see [View AS2 connector details](#).

AS2 connector algorithms

When you create an AS2 connector, the following security algorithms are attached to the connector.

Type	Algorithm
TLS Cipher	TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256
	TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256
	TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256
	TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256
	TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384
	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384
	TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384

Type	Algorithm
	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384

Basic authentication for AS2 connectors

When you create or update a Transfer Family server that uses the AS2 protocol, you can add Basic authentication for outbound messages. You do this by adding authentication information to a connector.

Note

Basic authentication is available only if you're using HTTPS.

To use authentication for your connector, select **Enable Basic authentication** in the **Basic authentication** section. After you enable Basic authentication, you can choose to create a new secret, or use an existing one. In either case, the credentials in the secret are sent with outbound messages that use this connector. The credentials must match the user that is attempting to connect to the trading partner's remote endpoint.

The following screenshot shows **Enable Basic authentication** selected, and **Create a new secret** chosen. After making these choices, you can enter a username and password for the secret.

Basic authentication [Info](#)

Enable Basic authentication - optional
Select this option to authenticate with your trading partner's host using username and password credentials.


Basic authentication credentials [Info](#)
Choose the username and password credentials that will be used to authenticate with your trading partner's host.

Create a new secret

Choose an existing secret

Username

Password

i Update the access role associated with your connector to provide  Transfer Family with permission to read the secret containing your Basic authentication credentials.

The following screenshot shows **Enable Basic authentication** selected, and **Choose an existing secret** chosen. Your secret must be in the correct format, as described in [Enable Basic authentication for AS2 connectors](#).


Basic authentication [Info](#)


Enable Basic authentication - optional
Select this option to authenticate with your trading partner's host using username and password credentials.



Basic authentication credentials [Info](#)
Choose the username and password credentials that will be used to authenticate with your trading partner's host.


Create a new secret


Choose an existing secret





aws/transfer/ 
SFTP connector 

aws/transfer/sftp-connector1
Secret key 

aws/transfer/c- 

i Update the access role associated with your connector to provide AWS Transfer Family with permission to read the secret containing your Basic authentication credentials.

Enable Basic authentication for AS2 connectors

When you enable Basic authentication for AS2 connectors, you can either create a new secret in the Transfer Family console, or you can use a secret that you create in Amazon Secrets Manager. In either case, your secret is stored in Secrets Manager.

Topics

- [Create a new secret in the console](#)
- [Use an existing secret](#)
- [Create a secret in Amazon Secrets Manager](#)

Create a new secret in the console

When you're creating a connector in the console, you can create a new secret.

To create a new secret, choose **Create a new secret** and then enter a username and password. These credentials must match the user that connects to the partner's endpoint.

Basic authentication [Info](#)

Enable Basic authentication - optional
Select this option to authenticate with your trading partner's host using username and password credentials.


Basic authentication credentials [Info](#)
Choose the username and password credentials that will be used to authenticate with your trading partner's host.

Create a new secret

Choose an existing secret

Username

Password

i Update the access role associated with your connector to provide  Transfer Family with permission to read the secret containing your Basic authentication credentials.

Note

When you create a new secret in the console, the name of the secret follows this naming convention: `/aws/transfer/connector-id`, where *connector-id* is the ID of the connector that you're creating. Consider this when you are trying to locate the secret in Amazon Secrets Manager.

Use an existing secret

When you're creating a connector in the console, you can specify an existing secret.

To use an existing secret, choose **Choose an existing secret**, and then choose a secret from the dropdown menu. For the details of creating a correctly formatted secret in Secrets Manager, see [Create a secret in Amazon Secrets Manager](#).

Basic authentication [Info](#)

Enable Basic authentication - optional
Select this option to authenticate with your trading partner's host using username and password credentials.

Basic authentication credentials [Info](#)
Choose the username and password credentials that will be used to authenticate with your trading partner's host.

Create a new secret

Choose an existing secret

Choose a secret

aws/transfer/...
SFTP connector...

aws/transfer/sftp-connector1
Secret key ...

aws/transfer/c...

Create a secret in Amazon Secrets Manager

The following procedure describes how to create an appropriate secret for use with your AS2 connector.

Note

Basic authentication is available only if you're using HTTPS.

To store user credentials in Secrets Manager for AS2 Basic authentication

1. Sign in to the Amazon Web Services Management Console and open the Amazon Secrets Manager console at <https://console.amazonaws.cn/secretsmanager/>.
2. In the left navigation pane, choose **Secrets**.
3. On the **Secrets** page, choose **Store a new secret**.
4. On the **Choose secret type** page, for **Secret type**, choose **Other type of secret**.
5. In the **Key/value pairs** section, choose the **Key/value** tab.

- **Key** – Enter **Username**.
- **value** – Enter the name of the user that is authorized to connect to the partner' server.

6. If you want to provide a password, choose **Add row**, and in the **Key/value pairs** section, choose the **Key/value** tab.

Choose **Add row**, and in the **Key/value pairs** section, choose the **Key/value** tab.

- **Key** – Enter **Password**.
- **value** – Enter the password for the user.

7. If you want to provide a private key, choose **Add row**, and in the **Key/value pairs** section, choose the **Key/value** tab.

- **Key** – Enter **PrivateKey**.
- **value** – Enter a private key for the user. This value must be stored in OpenSSH format, and must correspond to the public key that is stored for this user in the remote server.

8. Choose **Next**.
9. On the **Configure secret** page, enter a name and description for your secret. We recommend that you use a prefix of **aws/transfer/** for the name. For example, you could name your secret **aws/transfer/connector-1**.
10. Choose **Next**, and then accept the defaults on the **Configure rotation** page. Then choose **Next**.
11. On the **Review** page, choose **Store** to create and store the secret.

After you create the secret, you can choose it when you are creating a connector (see [Configure AS2 connectors](#)). In the step where you enable Basic authentication, choose the secret from the dropdown list of available secrets.

View AS2 connector details

You can find a list of details and properties for an AS2 Amazon Transfer Family connector in the Amazon Transfer Family console. An AS2 connector's properties include its URL, roles, profiles, MDNs, tags, and monitoring metrics.

This is the procedure for viewing connector details.

To view connector details

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Connectors**.
3. Choose the identifier in the **Connector ID** column to see the details page for the selected connector.

You can change the properties for the AS2 connector on the connector's details page by choosing **Edit**.

Connector configuration Info Edit

Name my-as2-connector	Access role [Redacted]
URL https://www.example.com	Logging role AWSTransferLoggingAccess

Communication settings Info

AS2-From header [Redacted]	AS2-To header [Redacted]
--------------------------------------	------------------------------------

AS2 configuration Info Edit

Local profile [Redacted]	Compression Enabled	Encryption algorithm AES128_CBC
Partner profile [Redacted]	Message Subject View	Signing algorithm SHA384
Preserve S3 Content-Type Enabled		

MDN configuration Info Edit

Request MDN Enabled	Signed MDN Default to message signing algorithm: SHA384	Synchronization Enabled
-------------------------------	---	-----------------------------------

Basic authentication Info[Edit](#)Basic authentication
✔ EnabledSecret
aws/transfer/c- [REDACTED]**Egress IP details** Info

Service managed static IP addresses of this connector

23.23.130.9

44.196.109.11

3.219.16.7

Tags (1)[Manage tags](#)

Use tags to organize, search, and filter your Connectors. We recommend adding a tag with 'Name' as the key and a unique string as the value to easily identify your Connector.

Find resources

< 1 >

Key	Value
Name	my-as2-connector

AS2 Monitoring

3h

1d

1w


UTC

UTC timezone

Refresh

Dropdown

More

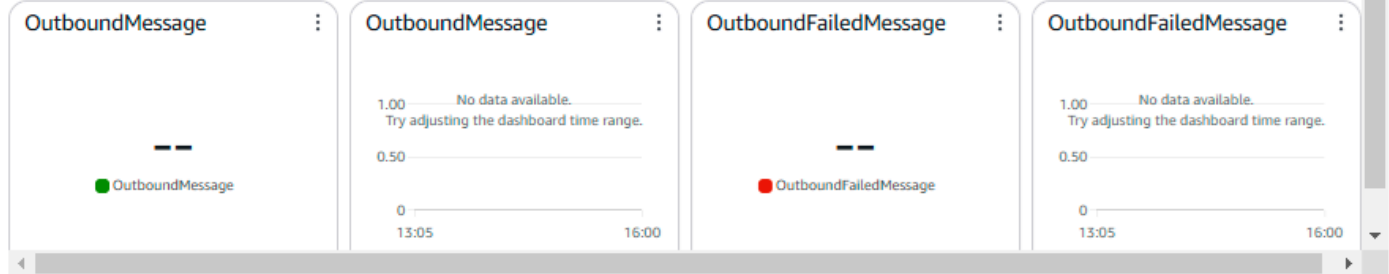**Note**

You can get much of this information, albeit in a different format, by running the following Amazon Command Line Interface (Amazon CLI) command:

```
aws transfer describe-connector --connector-id your-connector-id
```

For more information, see [DescribeConnector](#) in the API reference.

Sending and receiving AS2 messages

This section describes the processes for sending and receiving AS2 messages. It also provide details on filenames and locations associated with AS2 messages.

The following table lists the available encryption algorithms for AS2 messages, and when you can use them.

Encryption algorithm	HTTP	HTTPS	Notes
AES128_CBC	Yes	Yes	
AES192_CBC	Yes	Yes	
AES256_CBC	Yes	Yes	
DES_EDE3_CBC	Yes	Yes	Only use this algorithm if you must support a legacy client that requires it, as it is a weak encryption algorithm.
NONE	No	Yes	If you are sending messages to a Transfer Family server, you can only select NONE if you are using an Application Load Balancer (ALB).

Topics


- [Receive AS2 message process](#)
- [Sending and receiving AS2 messages over HTTPS](#)
- [Transferring files by using an AS2 connector](#)
- [File names and locations](#)

- [Status codes](#)
- [Sample JSON files](#)

Receive AS2 message process

The inbound process is defined as a message or file that's being transferred to your Amazon Transfer Family server. The sequence for inbound messages is as follows:

1. An admin or automated process starts an AS2 file transfer on the partner's remote AS2 server.
2. The partner's remote AS2 server signs and encrypts the file contents, then sends an HTTP POST request to an AS2 inbound endpoint hosted on Transfer Family.
3. Using the configured values for the server, partners, certificates, and agreement, Transfer Family decrypts and verifies the AS2 payload. The file contents are stored in the configured Amazon S3 file store.
4. The signed MDN response is returned either inline with the HTTP response, or asynchronously through a separate HTTP POST request back to the originating server.
5. An audit trail is written to Amazon CloudWatch with details about the exchange.
6. The decrypted file is available in a folder named `inbox/processed`.

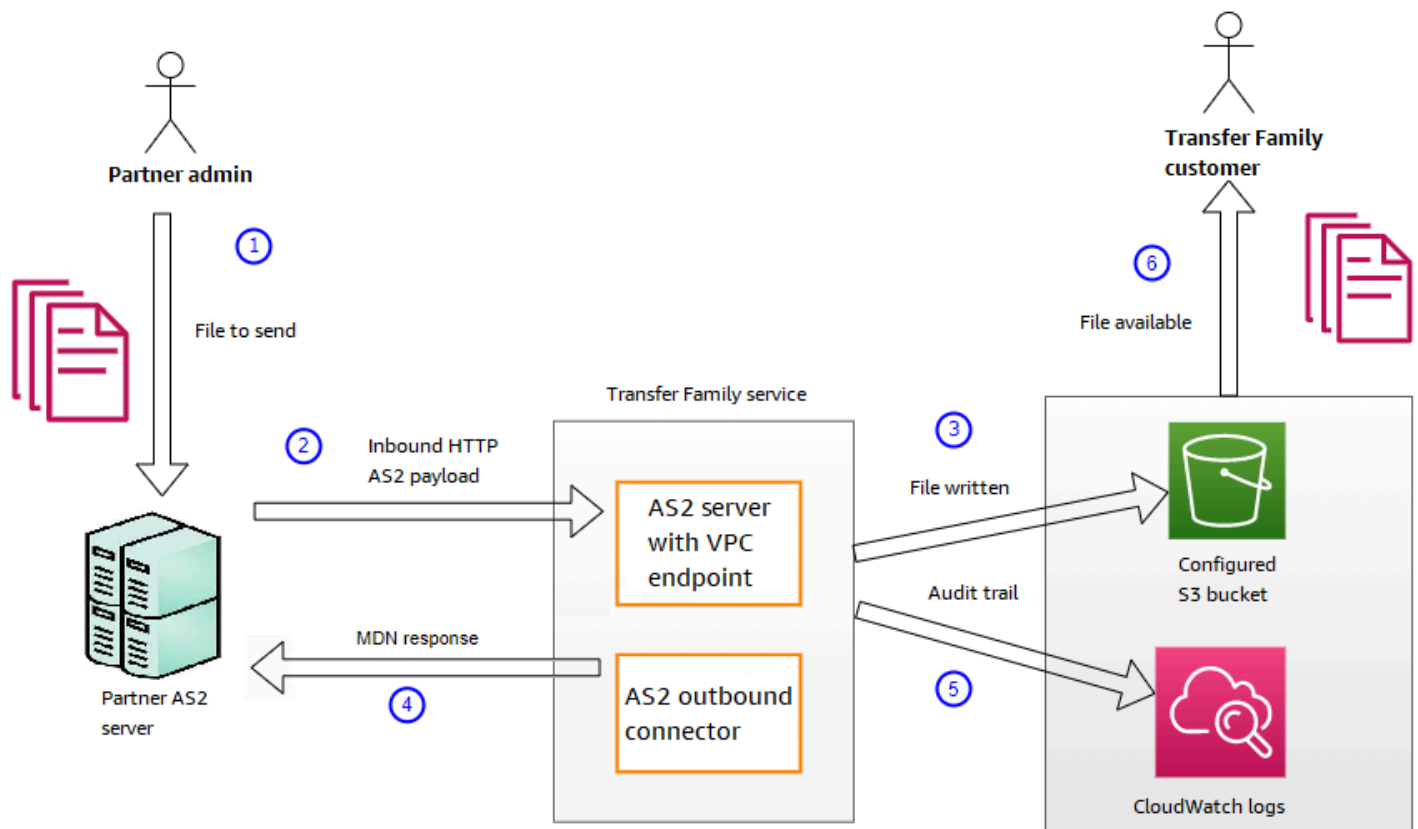

Sending and receiving AS2 messages over HTTPS

This section describes how to configure a Transfer Family server that uses the AS2 protocol to send and receive messages over HTTPS.

Topics

- [Send AS2 messages over HTTPS](#)
- [Receive AS2 messages over HTTPS](#)

Send AS2 messages over HTTPS

To send AS2 messages using HTTPS, create a connector with the following information:

- For the URL, specify an HTTPS URL
- For the encryption algorithm, select any of the available algorithms.

Note

To send messages to a Transfer Family server while not using encryption (that is, you select NONE for the encryption algorithm), you must use an Application Load Balancer (ALB).

- Provide the remaining values for the connector as described in [Configure AS2 connectors](#).

Receive AS2 messages over HTTPS

Amazon Transfer Family AS2 servers currently only provide HTTP transport over port 5080. However, you can terminate TLS on a network or application load balancer in front of your Transfer Family server VPC endpoint by using a port and certificate of your choosing. With this approach, you can have incoming AS2 messages use HTTPS.

Prerequisites

- The VPC must be in the same Amazon Web Services Region as your Transfer Family server.
- The subnets of your VPC must be within the Availability Zones that you want to use your server in.

Note

Each Transfer Family server can support up to three Availability Zones.

- Allocate up to three Elastic IP addresses in the same Region as your server. Or, you can choose to bring your own IP address range (BYOIP).

Note

The number of Elastic IP addresses must match the number of Availability Zones that you use with your server endpoints.

You can configure either a Network Load Balance (NLB) or an Application Load Balancer (ALB). The following table lists the pros and cons for each approach.

The table below provides the differences in capabilities when you use an NLB versus an ALB to terminate TLS.

Feature	Network Load Balancer (NLB)	Application Load Balancer (ALB)
Latency	Lower latency as it operates at the network layer.	Higher latency as it operates at the application layer.
Static IP support	Can attach Elastic IP addresses that can be static.	Cannot attach Elastic IP addresses: provides a domain whose underlying IP addresses can change.
Advanced routing	Doesn't support advanced routing.	Supports advanced routing. Can inject X-Forwarded-Proto header required for AS2 without encryption. This header is described in X-Forwarded-Proto on the developer.mozilla.org website.
TLS/SSL termination	Supports TLS/SSL termination	Supports TLS/SSL termination
Mutual TLS (mTLS)	Transfer Family doesn't currently support using an NLB for mTLS	Support for mTLS

Configure NLB

This procedure describes how to set up an internet-facing Network Load Balancer (NLB) in your VPC.

To create a Network Load Balancer and define the VPC endpoint of the server as the load balancer's target

1. Open the Amazon Elastic Compute Cloud console at <https://console.amazonaws.cn/ec2/>.
2. From the navigation pane, choose **Load Balancers**, and then choose **Create load balancer**.
3. Under **Network Load Balancer**, choose **Create**.
4. In the **Basic configuration** section, enter the following information:
 - For **Name**, enter a descriptive name for the load balancer.
 - For **Scheme**, choose **Internet-facing**.
 - For **IP address type**, choose **IPv4**.
5. In the **Network mapping** section, enter the following information:
 - For **VPC**, choose the virtual private cloud (VPC) that you created.
 - Under **Mappings**, choose the Availability Zones associated with the public subnets that are available in the same VPC that you use with your server endpoints.
 - For the **IPv4 address** of each subnet, choose one of the Elastic IP addresses that you allocated.
6. In the **Listeners and routing** section, enter the following information:
 - For **Protocol**, choose **TLS**.
 - For **Port**, enter **5080**.
 - For **Default action**, choose **Create target group**. For the details of creating a new target group, see [To create a target group](#).

After you create a target group, enter its name in the **Default action** field.

7. In the **Secure listener settings** section, choose your certificate in the **Default SSL/TLS certificate** area.
8. Choose **Create load balancer** to create your NLB.
9. (Optional, but recommended) Turn on access logs for the Network Load Balancer to maintain a full audit trail, as described in [Access logs for your Network Load Balancer](#).

We recommend this step because the TLS connection is terminated at the NLB. Therefore, the source IP address that's reflected in your Transfer Family AS2 CloudWatch log groups is the NLB's private IP address, instead of your trading partner's external IP address.

Configure ALB

This procedure describes how to set up an Application Load Balancer (ALB) in your VPC.

To create an Application Load Balancer and define the VPC endpoint of the server as the load balancer's target

1. Open the Amazon Elastic Compute Cloud console at <https://console.amazonaws.cn/ec2/>.
2. From the navigation pane, choose **Load Balancers**, and then choose **Create load balancer**.
3. Under **Application Load Balancer**, choose **Create**.
4. In the ALB console, create a new HTTP listener on port 443 (HTTPS).
5. (Optional). If you want to set up mutual authentication (mTLS), configure security settings and a trust store.
 - a. Attach your SSL/TLS certificate to the listener.
 - b. Under **Client certificate handling**, select **Mutual authentication (mTLS)**.
 - c. Choose **Verify with trust store**.
 - d. Under **Advanced mTLS settings**, choose or create a trust store by uploading your CA certificates.
6. Create a new target group and add the private IP addresses of your Transfer Family AS2 server endpoints as targets on port 5080. For the details of creating a new target group, see [To create a target group](#).
7. Configure health checks for the target group to use the HTTP protocol on port 5080.
8. Create a new rule to forward HTTPS traffic from the listener to the target group.
9. Configure the listener to use your SSL/TLS certificate.

After you set up the load balancer, clients communicate with the load balancer over the custom port listener. Then, the load balancer communicates with the server over port 5080.

To create a target group

1. After you choose **Create target group** in the previous procedure, you are taken to the **Specify group details** page for a new target group.
2. In the **Basic configuration** section, enter the following information.
 - For **Choose a target type**, choose **IP addresses**.

- For **Target group name**, enter a name for the target group.
 - For **Protocol**, your selection is dependent upon whether you are using an ALB or an NLB.
 - For a Network Load Balancer (NLB), choose **TCP**
 - For an Application Load Balancer (ALB), choose **HTTP**
 - For **Port**, enter **5080**.
 - For **IP address type**, choose **IPv4**.
 - For **VPC**, choose the VPC that you created for your Transfer Family AS2 server.
3. In the **Health checks** section, choose the **Health check protocol**.
 - For an ALB, choose **HTTP**
 - For an NLB, choose **TCP**
 4. Choose **Next**.
 5. On the **Register targets** page, enter the following information:
 - For **Network**, confirm that the VPC that you created for your Transfer Family AS2 server is specified.
 - For **IPv4 address**, enter the private IPv4 address of your Transfer Family AS2 server's endpoints.

If you have more than one endpoint for your server, choose **Add IPv4 address** to add another row for entering another IPv4 address. Repeat this process until you've entered the private IP addresses for all of your server's endpoints.
 - Make sure that **Ports** is set to **5080**.
 - Choose **Include as pending below** to add your entries to the **Review targets** section.
 6. In the **Review targets** section, review your IP targets.
 7. Choose **Create target group**, then go back to the previous procedure for creating your NLB and enter the new target group where indicated.

Test access to the server from an Elastic IP address

Connect to the server over the custom port by using an Elastic IP address or the DNS name of the Network Load Balancer.

Important

Manage access to your server from client IP addresses by using the [network access control lists \(network ACLs\)](#) for the subnets configured on the load balancer. Network ACL permissions are set at the subnet level, so the rules apply to all resources that are using the subnet. You can't control access from client IP addresses by using security groups, because the load balancer's target type is set to **IP addresses** instead of **Instances**. Therefore, the load balancer doesn't preserve source IP addresses. If the [Network Load Balancer's health checks](#) fail, this means that the load balancer can't connect to the server endpoint. To troubleshoot this issue, check the following:

- Confirm that the server [endpoint's associated security group](#) allows inbound connections from the subnets that are configured on the load balancer. The load balancer must be able to connect to the server endpoint over port 5080.
- Confirm that the server's **State** is **Online**.

Transferring files by using an AS2 connector

AS2 connectors establish a relationship between trading partners for transfers of AS2 messages from a Transfer Family server to an external, partner-owned destination.

You can use Transfer Family to send AS2 messages by referencing the connector ID and the paths to the files, as illustrated in the following `start-file-transfer` Amazon Command Line Interface (Amazon CLI) command:

```
aws transfer start-file-transfer --connector-id c-1234567890abcdef0 \  
--send-file-paths "/amzn-s3-demo-source-bucket/myfile1.txt" "/amzn-s3-demo-source-  
bucket/myfile2.txt"
```

To get the details for your connectors, run the following command:

```
aws transfer list-connectors
```

The `list-connectors` command returns the connector IDs, URLs, and Amazon Resource Names (ARNs) for your connectors.

To return the properties of a particular connector, run the following command with the ID that you want to use:

```
aws transfer describe-connector --connector-id your-connector-id
```

The `describe-connector` command returns all of the properties for the connector, including its URL, roles, profiles, Message Disposition Notices (MDNs), tags, and monitoring metrics.


You can confirm that the partner successfully received the files by viewing the JSON and MDN files. These files are named according to the conventions described in [File names and locations](#). If you configured a logging role when you created the connector, you can also check your CloudWatch logs for the status of AS2 messages.

To view AS2 connector details, see [View AS2 connector details](#). For more information about creating AS2 connectors, see [Configure AS2 connectors](#).

To send an AS2 outbound message

The outbound process is defined as a message or file being sent from Amazon to an external client or service. The sequence for outbound messages is as follows:

1. An admin calls the `start-file-transfer` Amazon Command Line Interface (Amazon CLI) command or the `StartFileTransfer` API operation. This operation references a `connector` configuration.
2. Transfer Family detects a new file request and locates the file. The file is compressed, signed, and encrypted.
3. A transfer HTTP client performs an HTTP POST request to transmit the payload to the partner's AS2 server.
4. The process returns the signed MDN response, inline with the HTTP response (synchronous MDN).
5. As the file moves between different stages of transmission, the process delivers the MDN response receipt and processing details to the customer.
6. The remote AS2 server makes the decrypted and verified file available to the partner admin.

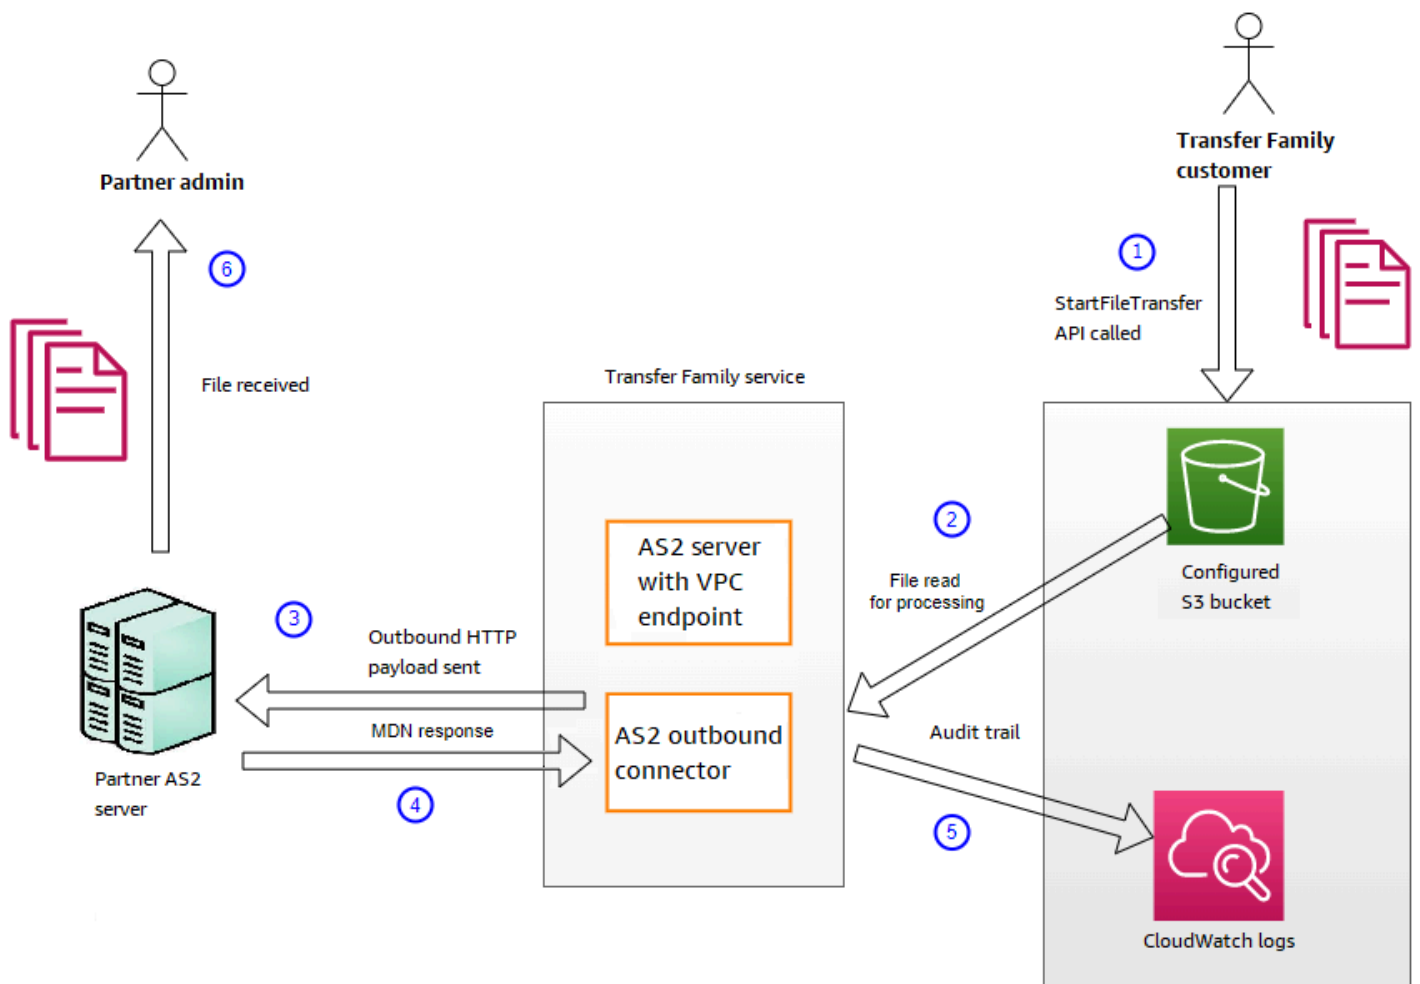

AS2 processing supports many of the RFC 4130 protocols, with a focus on common use cases and integration with existing AS2-enabled server implementations. For details of the supported configurations, see [AS2 configurations](#).

File names and locations

This section discusses the file-naming conventions for AS2 transfers.

For inbound file transfers, note the following:

- You specify the base directory in an agreement. The base directory is the Amazon S3 bucket name combined with a prefix, if any. For example, `/amzn-s3-demo-bucket/AS2-folder`.
- If an incoming file is processed successfully, the file (and the corresponding JSON file) is saved to the `/processed` folder. For example, `/amzn-s3-demo-bucket/AS2-folder/processed`.

The JSON file contains the following fields:

- agreement-id
 - as2-from
 - as2-to
 - as2-message-id
 - transfer-id
 - client-ip
 - connector-id
 - failure-message
 - file-path
 - message-subject
 - mdn-message-id
 - mdn-subject
 - requester-file-name
 - requester-content-type
 - server-id
 - status-code
 - failure-code
 - transfer-size
- If an incoming file cannot be processed successfully, the file (and the corresponding JSON file) is saved to the /failed folder. For example, /amzn-s3-demo-bucket/AS2-folder/failed.
 - The transferred file is stored in the processed folder as *original_filename.messageId.original_extension*. That is, the message ID for the transfer is appended to the name of the file, before its original extension.
 - A JSON file is created and saved as *original_filename.messageId.original_extension.json*. In addition to the message ID being added, the string .json is appended to the transferred file's name.
 - A Message Disposition Notice (MDN) file is created and saved as *original_filename.messageId.original_extension.mdn*. In addition to the message ID being added, the string .mdn is appended to the transferred file's name.
 - If there is an inbound file named ExampleFileInS3Payload.dat, the following files are

- **File** –

ExampleFileInS3Payload.c4d6b6c7-23ea-4b8c-9ada-0cb811dc8b35@44313c54b0a46a36.

- **JSON** –

ExampleFileInS3Payload.c4d6b6c7-23ea-4b8c-9ada-0cb811dc8b35@44313c54b0a46a36.

- **MDN** –

ExampleFileInS3Payload.c4d6b6c7-23ea-4b8c-9ada-0cb811dc8b35@44313c54b0a46a36.

For outbound transfers, the naming is similar, with the difference that there is no incoming message file, and also, the transfer ID for the transferred message is added to the file name. The transfer ID is returned by the `StartFileTransfer` API operation (or when another process or script calls this operation).

- The `transfer-id` is an identifier that is associated with a file transfer. All requests that are part of a `StartFileTransfer` call share a `transfer-id`.
- The base directory is the same as the path that you use for the source file. That is, the base directory is the path that you specify in the `StartFileTransfer` API operation or `start-file-transfer` Amazon CLI command. For example:

```
aws transfer start-file-transfer --send-file-paths /amzn-s3-demo-bucket/AS2-folder/
file-to-send.txt
```

If you run this command, MDN and JSON files are saved in `/amzn-s3-demo-bucket/AS2-folder/processed` (for successful transfers), or `/amzn-s3-demo-bucket/AS2-folder/failed` (for unsuccessful transfers).

- A JSON file is created and saved as `original_filename.transferId.messageId.original_extension.json`.
- An MDN file is created and saved as `original_filename.transferId.messageId.original_extension.mdn`.
- If there is an outbound file named `ExampleFileOutTestOutboundSyncMdn.dat`, the following files are created:
 - **JSON** – `ExampleFileOutTestOutboundSyncMdn.dedf4601-4e90-4043-b16b-579af35e0d83.fbe18db8-7361-42ff-8ab6-49ec1e435f34@c9c705f0baaaabaa.dat.j`
 - **MDN** – `ExampleFileOutTestOutboundSyncMdn.dedf4601-4e90-4043-b16b-579af35e0d83.fbe18db8-7361-42ff-8ab6-49ec1e435f34@c9c705f0baaaabaa.dat.m`

You can also check the CloudWatch logs to view the details of your transfers, including any that failed.

Status codes

The following table lists all of the status codes that can be logged to CloudWatch logs when you or your partner send an AS2 message. Different message processing steps apply to different message types and are intended for monitoring only. The COMPLETED and FAILED states represent the final step in processing, and are visible in JSON files.

Code	Description	Processing completed?
PROCESSING	The message is in the process of being converted to its final format. For example, decompression and decryption steps both have this status.	No
MDN_TRANSMIT	Message processing is sending an MDN response.	No
MDN_RECEIVE	Message processing is receiving an MDN response.	No
COMPLETED	Message processing has completed successfully. This state includes when an MDN is sent for an inbound message or for MDN verification of outbound messages.	Yes
FAILED	The message processing has failed. For a list of error codes, see AS2 error codes .	Yes

Sample JSON files

This section lists sample JSON files for both inbound and outbound transfers, including sample files for successful transfers and transfers that fail.

Sample outbound file that is successfully transferred:

```
{
  "requester-content-type": "application/octet-stream",
  "message-subject": "File xyzTest from MyCompany_OID to partner YourCompany",
  "requester-file-name": "TestOutboundSyncMdn-9lmCr79hV.dat",
  "as2-from": "MyCompany_OID",
  "connector-id": "c-c21c63ceaaf34d99b",
  "status-code": "COMPLETED",
  "disposition": "automatic-action/MDN-sent-automatically; processed",
  "transfer-size": 3198,
  "mdn-message-id": "OPENAS2-11072022063009+0000-df865189-1450-435b-9b8d-
d8bc0cee97fd@PartnerA_OID_MyCompany_OID",
  "mdn-subject": "Message be18db8-7361-42ff-8ab6-49ec1e435f34@c9c705f0baaaabaa has been
accepted",
  "as2-to": "PartnerA_OID",
  "transfer-id": "dedf4601-4e90-4043-b16b-579af35e0d83",
  "file-path": "/amzn-s3-demo-bucket/as2testcell10000/openAs2/
TestOutboundSyncMdn-9lmCr79hV.dat",
  "as2-message-id": "fbe18db8-7361-42ff-8ab6-49ec1e435f34@c9c705f0baaaabaa",
  "timestamp": "2022-07-11T06:30:10.791274Z"
}
```

Sample outbound file that is unsuccessfully transferred:

```
{
  "failure-code": "HTTP_ERROR_RESPONSE_FROM_PARTNER",
  "status-code": "FAILED",
  "requester-content-type": "application/octet-stream",
  "subject": "Test run from Id da86e74d6e57464aae1a55b8596bad0a to partner
9f8474d7714e476e8a46ce8c93a48c6c",
  "transfer-size": 3198,
  "requester-file-name": "openAs2TestOutboundWrongAs2Ids-necco-3VYn5n8wE.dat",
  "as2-message-id": "9a9cc9ab-7893-4cb6-992a-5ed8b90775ff@718de4cec1374598",
  "failure-message": "http://Test123456789.us-east-1.elb.amazonaws.com:10080 returned
status 500 for message with ID 9a9cc9ab-7893-4cb6-992a-5ed8b90775ff@718de4cec1374598",
  "transfer-id": "07bd3e07-a652-4cc6-9412-73ffdb97ab92",
}
```

```

"connector-id": "c-056e15cc851f4b2e9",
"file-path": "/amzn-s3-demo-bucket-4c1tq6ohjt9y/as2IntegCell10002/openAs2/
openAs2TestOutboundWrongAs2Ids-necco-3VYn5n8wE.dat",
"timestamp": "2022-07-11T21:17:24.802378Z"
}

```

Sample inbound file that is successfully transferred:

```

{
  "requester-content-type": "application/EDI-X12",
  "subject": "File openAs2TestInboundAsyncMdn-necco-5Ab6bTfC0.dat sent from MyCompany
to PartnerA",
  "client-ip": "10.0.109.105",
  "requester-file-name": "openAs2TestInboundAsyncMdn-necco-5Ab6bTfC0.dat",
  "as2-from": "MyCompany_0ID",
  "status-code": "COMPLETED",
  "disposition": "automatic-action/MDN-sent-automatically; processed",
  "transfer-size": 1050,
  "mdn-subject": "Message Disposition Notification",
  "as2-message-id": "OPENAS2-11072022233606+0000-5dab0452-0ca1-4f9b-b622-
fba84effff3c@MyCompany_0ID_PartnerA_0ID",
  "as2-to": "PartnerA_0ID",
  "agreement-id": "a-f5c5cbea5f7741988",
  "file-path": "processed/openAs2TestInboundAsyncMdn-
necco-5Ab6bTfC0.OPENAS2-11072022233606+0000-5dab0452-0ca1-4f9b-b622-
fba84effff3c@MyCompany_0ID_PartnerA_0ID.dat",
  "server-id": "s-5f7422b04c2447ef9",
  "timestamp": "2022-07-11T23:36:36.105030Z"
}

```

Sample inbound file that is unsuccessfully transferred:

```

{
  "failure-code": "INVALID_REQUEST",
  "status-code": "FAILED",
  "subject": "Sending a request from InboundHttpClientTests",
  "client-ip": "10.0.117.27",
  "as2-message-id": "testFailedLogs-TestRunConfig-Default-inbound-direct-
integ-0c97ee55-af56-4988-b7b4-a3e0576f8f9c@necco",
  "as2-to": "0beff6af56c548f28b0e78841dce44f9",
  "failure-message": "Unsupported date format: 2022/123/456T",
  "agreement-id": "a-0ceec8ca0a3348d6a",
  "as2-from": "ab91a398aed0422d9dd1362710213880",
}

```

```
"file-path": "failed/01187f15-523c-43ac-9fd6-51b5ad2b08f3.testFailedLogs-TestRunConfig-Default-inbound-direct-integ-0c97ee55-af56-4988-b7b4-a3e0576f8f9c@necco",
"server-id": "s-0582af12e44540b9b",
"timestamp": "2022-07-11T06:30:03.662939Z"
}
```

Customize HTTP headers for AS2 messages

When sending AS2 messages to trading partners, you may need to customize the HTTP headers to meet specific requirements or enhance compatibility with your partner's AS2 server configuration. This Amazon CloudFormation template creates an infrastructure to enable customized HTTP headers for AS2 messages sent through Amazon Transfer Family. It sets up an Amazon API Gateway and Lambda function to act as a proxy, allowing dynamic modification of headers required by trading partners' AS2 servers.

Use this template to do the following:

- Add custom HTTP headers to outbound AS2 messages
- Override default header values with custom values

Important

Be careful when overriding default header values, as it can cause send failures: some AS2 headers are required.

- Ensure compatibility with trading partners that have specific header requirements

Template Overview

The template creates the following main components:

- A Lambda function that processes and forwards AS2 messages
- An Amazon API Gateway to expose the Lambda function
- IAM roles and permissions for the Lambda function
- Conditional resources for HTTPS support

The template file is available here: [Dynamic HTTP headers template](#).

How It Works

1. The Amazon API Gateway receives incoming AS2 messages from Amazon Transfer Family.
2. The request is forwarded to the Lambda function.
3. The Lambda function processes the request, adding or modifying headers as needed.
4. The modified request is then forwarded to the partner's AS2 server.
5. The response from the partner's server is returned through the Lambda and Amazon API Gateway back to Amazon Transfer Family.

Key Features

- *Dynamic Header Modification:* Allows customization of the Subject header and addition of other required headers.
- *Protocol Support:* Works with both HTTP and HTTPS protocols.
- *Flexible Configuration:* Allows specification of partner host, port, and path.

Implementation Details

The template implements the following key components:

Lambda Function

The core of the solution is a Node.js Lambda function that:

- Receives requests from the Amazon API Gateway
- Modifies headers based on configuration and incoming request data
- Forwards the modified request to the partner's AS2 server
- Handles both HTTP and HTTPS protocols
- Includes error handling and logging

Amazon API Gateway

An HTTP API is set up to:

- Receive incoming AS2 messages

- Route requests to the Lambda function
- Return responses back to Amazon Transfer Family

Template parameters

Enter information for the template parameters as follows. Note that all of these parameters are strings.

- **Environment**: this parameter is used to name the resources that the template creates: whether they are intended for a development or production environment. Valid values are **dev** and **prod**.
- **PartnerHost**: the IP address or hostname of the AS2 partner server.
- **PartnerPort**: the port number for the AS2 partner server. If not specified, defaults to 80 for HTTP and 443 for HTTPS.
- **PartnerPath**: the path to the AS2 endpoint on the partner server
- **ProtocolType**: the protocol to use for the AS2 communication: valid values are **HTTP** and **HTTPS**.

Conditional Resources

For HTTPS support, the template conditionally creates:

- A Lambda Layer for CA certificates
- HTTPS-specific configuration in the Lambda function

Deployment and Usage

To customize AS2 HTTP headers using a CloudFormation template

1. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
2. In the left navigation pane, choose **Stacks**.
3. Choose **Create stack**, and then choose **With new resources (standard)**.
4. In the **Prerequisite - Prepare template** section, choose **Choose an existing template**.
5. Copy this link, [Dynamic HTTP headers template](#), and paste it into the **Amazon S3 URL** field.
6. Choose **Next**.

7. Fill in the parameter details with your information. These are detailed in [Template parameters](#).
8. Choose **Next**. On the **Configure stack options** page, choose **Next** again.
9. Review the details for the stack that you're creating, and then choose **Create stack**.

Note

At the bottom of the page, under **Capabilities**, you must acknowledge that Amazon CloudFormation might create Amazon Identity and Access Management (IAM) resources.

After deploying this Amazon CloudFormation stack:

1. Note the Amazon API Gateway endpoint URL provided in the stack outputs.
2. Update your existing Amazon Transfer Family Connector to use this new Amazon API Gateway endpoint.
3. The solution will now handle AS2 messages, adding or modifying headers as configured.

Warning

Only modify the Subject header or add headers that your partner explicitly expects. Changing other headers may cause transfer failures.

Monitoring AS2 usage

You can monitor AS2 activity using Amazon CloudWatch and Amazon CloudTrail. To view other Transfer Family server metrics, see [Amazon CloudWatch logging for Amazon Transfer Family servers](#)

AS2 metrics

Metric	Description
InboundMessage	The total number of AS2 messages successfully received from a trading partner. Units: Count

Metric	Description
	Period: 5 minutes
InboundFailedMessage	<p>The total number of AS2 messages that were unsuccessfully received from a trading partner. That is, a trading partner sent a message, but the Transfer Family server was not able to successfully process it.</p> <p>Units: Count</p> <p>Period: 5 minutes</p>
OutboundMessage	<p>The total number of AS2 messages successfully sent from the Transfer Family server to a trading partner.</p> <p>Units: Count</p> <p>Period: 5 minute</p>
OutboundFailedMessage	<p>The total number of AS2 messages that were unsuccessfully sent to a trading partner. That is, they were sent from the Transfer Family server, but were not successfully received by the trading partner.</p> <p>Units: Count</p> <p>Period: 5 minutes</p>

AS2 Status codes

The following table lists all of the status codes that can be logged to CloudWatch logs when you or your partner send an AS2 message. Different message processing steps apply to different message types and are intended for monitoring only. The COMPLETED and FAILED states represent the final step in processing, and are visible in JSON files.

Code	Description	Processing completed?
PROCESSING	The message is in the process of being converted to its final format. For example, decompression and decryption steps both have this status.	No
MDN_TRANSMIT	Message processing is sending an MDN response.	No
MDN_RECEIVE	Message processing is receiving an MDN response.	No
COMPLETED	Message processing has completed successfully. This state includes when an MDN is sent for an inbound message or for MDN verification of outbound messages.	Yes
FAILED	The message processing has failed. For a list of error codes, see AS2 error codes .	Yes

AS2 error codes

The following table lists and describes error codes that you might receive from AS2 file transfers.

AS2 error codes

Code	Error	Description and resolution
ACCESS_DENIED	<ul style="list-style-type: none"> Access denied. Check if your access role has necessary permissions. Invalid file path <i>send-file-path</i> 	Occurs when handling a <code>StartFileTransfer</code> request where any of the <code>SendFilePaths</code> are not valid or malformed. That

Code	Error	Description and resolution
	<ul style="list-style-type: none"> Failed to get credentials with ErrorCode: <i>error-code</i> 	<p>is, the path is missing the Amazon S3 bucket name, or the path includes characters that aren't valid. Also occurs if Transfer Family fails to assume the access role or logging role.</p> <p>Ensure that the path contains a valid Amazon S3 bucket name and key name.</p>
AGREEMENT_NOT_FOUND	Agreement was not found.	<p>Either the agreement was not found, or the agreement is associated with an inactive profile.</p> <p>Update the agreement within the Transfer Family server to include active profiles.</p>
CONNECTOR_NOT_FOUND	Connector or related configuration was not found.	<p>Either the connector was not found, or the connector is associated with an inactive profile.</p> <p>Update the connector to include active profiles.</p>

Code	Error	Description and resolution
CREDENTIALS_RETRIEVAL_FAILED	<ol style="list-style-type: none">1. Secret not found in Secrets Manager.2. Cannot access Secrets Manager.3. Failed to decrypt secret in Secrets Manager.4. Cannot get secret value due to throttling.	<p>For AS2 Basic authentication, the secret must be formatted correctly. The following resolutions correspond to the errors listed in the previous column.</p> <ol style="list-style-type: none">1. Ensure that the secret ID is correct.2. Ensure that the access role has the appropriate permissions to read the secret. The access role must provide read and write access to the parent directory of the file location used in the <code>StartFileTransfer</code> request. Additionally, make sure that the role provides read and write access to the parent directory of the files that you intend to send with <code>StartFileTransfer</code>.3. If a customer managed key is being used for the secret, ensure that the access role has permissions for the Amazon Key Management Service (Amazon KMS) key.4. For the applicable quotas, see Quotas for handling secrets.

Code	Error	Description and resolution
DECOMPRESSION_FAILED	Failed to decompress message.	<p>Either the file sent is corrupt, or the compression algorithm is not valid.</p> <p>Resend the message and verify that ZLIB compression is used, or resend the message without compression enabled.</p>
DECRYPT_FAILED	Failed to decrypt message <i>message-ID</i> . Ensure that the partner has the correct public encryption key.	<p>Decryption failed.</p> <p>Confirm that the partner sent a payload by using a valid certificate and that encryption was performed by using a valid encryption algorithm.</p>
DECRYPT_FAILED_INVALID_SMIME_FORMAT	Unable to parse enveloped mimePart.	<p>MIME payload is either corrupt or in an unsupported SMIME format.</p> <p>The sender should make sure that the format they're using is supported, and then resend the payload.</p>

Code	Error	Description and resolution
DECRYPT_FAILED_NO_DECRYPTION_KEY_FOUND	No matching decryption key found.	<p>The partner profile did not have a certificate assigned that matched the message, or the certificates that matched the message are now expired or no longer valid.</p> <p>You must update the partner profile and ensure that it contains a valid certificate.</p>
DECRYPT_FAILED_UNSUPPORTED_ENCRYPTION_ALG	SMIME Payload Decryption requested using unsupported algorithm with ID: <i>encryption-ID</i> .	<p>The remote sender has sent an AS2 payload with an unsupported encryption algorithm.</p> <p>The sender must choose an encryption algorithm that's supported by Amazon Transfer Family.</p>
DUPLICATE_MESSAGE	Duplicate or double processed step.	<p>The payload has a duplicate processing step. For example, there are two encryption steps.</p> <p>Resend the message with a single step for signing, compression, and encryption.</p>

Code	Error	Description and resolution
ENCRYPT_FAILED_NO_ENCRYPTION_KEY_FOUND	No valid public encryption certificates found in profile: <i>local-profile-ID</i>	<p>Transfer Family is attempting to encrypt an outbound message, but no encryption certificates are found for the local profile.</p> <p>Resolution options:</p> <ul style="list-style-type: none"> • Ensure that the local profile has a certificate and private key for encryption attached. • Ensure that the encryption certificate is currently active.
ENCRYPTION_FAILED	Failed to encrypt file <i>file-name</i> .	<p>The file to be sent is not available for encryption.</p> <p>Verify that the file is in its expected AS2 location and that Amazon Transfer Family has permission to read the file.</p>
FILE_SIZE_TOO_LARGE	File size is too large.	This occurs when sending or receiving a file that exceeds the file size limit.

Code	Error	Description and resolution
HTTP_ERROR_RESPONSE_FROM_PARTNER	<i>partner-URL</i> returned status 400 for message with ID= <i>message-ID</i> .	Communicating with the partner's AS2 server returned an unexpected HTTP response code. The partner might be able to provide more diagnostics from their AS2 server logs.
INSUFFICIENT_MESSAGE_SECURITY_UNENCRYPTED	Encryption is required.	The partner sent an unencrypted message to Transfer Family, which is not supported. The sender must use an encrypted payload.
INVALID_ENDPOINT_PROTOCOL	Only HTTP and HTTPS are supported.	You must specify HTTP or HTTPS as the protocol in your AS2 connector configuration.

Code	Error	Description and resolution
INVALID_REQUEST	<ol style="list-style-type: none"> 1. There is a problem with a message header. 2. Could not parse secret JSON. Secret JSON did not match expected format. 3. Secret must be a JSON string. 4. Username must not contain a colon. Username must not contain control characters. Username must contain only ASCII characters. Password must not contain control characters. Password must contain only ASCII characters. 	<p>This error has several causes. The following resolutions correspond to the errors listed in the previous column.</p> <ol style="list-style-type: none"> 1. Check the <code>as2-from</code> and <code>as2-to</code> fields. Make sure that the original message ID is accurate for the MDN format. Also make sure that the message ID format is not missing any AS2 headers. 2. Ensure that the secret value matches the documented format, as described in Enable Basic authentication for AS2 connectors. 3. Ensure that the secret is provided as a string, and not as a binary. 4. Make the necessary correction to the username or password.

Code	Error	Description and resolution
INVALID_URL_FORMAT	Invalid URL format: <i>URL</i>	<p>This occurs when you are sending an outbound message using a connector configured with a malformed URL.</p> <p>Ensure that the connector is configured with a valid HTTP or HTTPS URL.</p>
MDN_RESPONSE_INDICATES_AUTHENTICATION_FAILED	Not applicable	<p>The receiver cannot authenticate the sender. The trading partner returns an MDN to Transfer Family with the disposition modifier Error: authentication-failed.</p>
MDN_RESPONSE_INDICATES_DECOMPRESSION_FAILED	Not applicable	<p>This occurs when the receiver cannot decompress the message contents. The trading partner returns an MDN to Transfer Family with the disposition modifier Error: decompression-failed.</p>
MDN_RESPONSE_INDICATES_DECRYPTION_FAILED	Not applicable	<p>The receiver cannot decrypt the message contents. The trading partner returns an MDN to Transfer Family with the disposition modifier Error: authentication-failed.</p>

Code	Error	Description and resolution
MDN_RESPONSE_INDICATES_INSUFFICIENT_MESSAGE_SECURITY	Not applicable	<p>The receiver expects the message to be signed or encrypted, but it isn't. The trading partner returns an MDN to Transfer Family with the disposition modifier Error: insufficient-message-security.</p> <p>Enable signing and/or encryption on the connector to match the trading partner's expectations.</p>
MDN_RESPONSE_INDICATES_INTEGRITY_CHECK_FAILED	Not applicable	<p>The receiver cannot verify content integrity. The trading partner returns an MDN to Transfer Family with the disposition modifier Error: integrity-check-failed.</p>
PATH_NOT_FOUND	Unable to create directory <i>file-path</i> . The parent path could not be found.	<p>Transfer Family is attempting to create a directory in the customer's Amazon S3 bucket, but the bucket is not found.</p> <p>Ensure that each path mentioned in the StartFile Transfer command contains the name of an existing bucket.</p>


Code	Error	Description and resolution
SEND_FILE_NOT_FOUND	File path <i>file-path</i> not found.	<p>Transfer Family can't locate the file in the send file operation.</p> <p>Check that the configured home directory and path are valid and that Transfer Family has read permissions for the file.</p>
SERVER_NOT_FOUND	Server associated with the message cannot be found.	<p>Transfer Family could not find the server when receiving a message. This can happen if the server is deleted during the processing of an incoming message.</p>
SERVER_NOT_ONLINE	Server <i>server-ID</i> is not online.	<p>The Transfer Family server is offline.</p> <p>Start the server so that it can receive and process messages.</p>
SIGNING_FAILED	Failed to sign file.	<p>The file to be sent is not available for signing, or signing could not be performed.</p> <p>Verify that the file is in its expected AS2 location and that Amazon Transfer Family has permission to read the file.</p>

Code	Error	Description and resolution
SIGNING_FAILED_NO_SIGNING_KEY_FOUND	No certificate found for profile: <i>local-profile-ID</i> .	<p>Attempting to sign an outbound message, but no signing certificates are found for the local profile.</p> <p>Resolution options:</p> <ul style="list-style-type: none"> • Ensure that the local profile has a certificate and private key for signing attached. • Ensure that the signing certificate is currently active.
UNABLE_RESOLVE_HOST_TO_IP_ADDRESS	Unable to resolve hostname to IP addresses.	<p>Transfer Family is unable to perform DNS to IP address resolution on the public DNS server that is configured in the AS2 connector.</p> <p>Update the connector to point to a valid partner URL.</p>
UNABLE_TO_CONNECT_TO_REMOTE_HOST_OR_IP	Connection to endpoint timed out.	<p>Transfer Family cannot establish a socket connection to the configured partner's AS2 server.</p> <p>Check that the partner's AS2 server is available at the configured IP address.</p>

Code	Error	Description and resolution
UNABLE_TO_RESOLVE_HOSTNAME	Unable to resolve hostname <i>hostname</i> .	<p>The Transfer Family server could not resolve the partner's hostname by using a public DNS server.</p> <p>Check that the configured host is registered and that the DNS record has had time to publish.</p>
VERIFICATION_FAILED	Signature verification failed for AS2 message <i>message-ID</i> or a MIC code did not match.	Check that the sender's signing certificate matches the signing certificates for the remote profile. Also check that the MIC algorithms are compatible with Amazon Transfer Family.
VERIFICATION_FAILED_NO_MATCHING_KEY_FOUND	<ul style="list-style-type: none"> No public certificate matching message signature could be found in profile: <i>partner-profile-ID</i> . Cannot get certificates for non-existent profile: <i>partner-profile-ID</i> . No valid certificate was found in profile: <i>partner-profile-ID</i> . 	<p>Amazon Transfer Family is attempting to verify the signature for a received message, but no matching signing certificate is found for the partner profile.</p> <p>Resolution options:</p> <ul style="list-style-type: none"> Ensure that the partner profile has a signing certificate attached. Ensure that the certificate is currently active. Ensure that the certificate is the correct signing certificate for the partner.

Amazon Transfer Family managed workflows

Amazon Transfer Family supports managed workflows for file processing. With managed workflows, you can kick off a workflow after a file has been transferred over SFTP, FTPS, or FTP. Using this feature, you can securely and cost effectively meet your compliance requirements for business-to-business (B2B) file exchanges by coordinating all the necessary steps required for file processing. In addition, you benefit from end-to-end auditing and visibility.

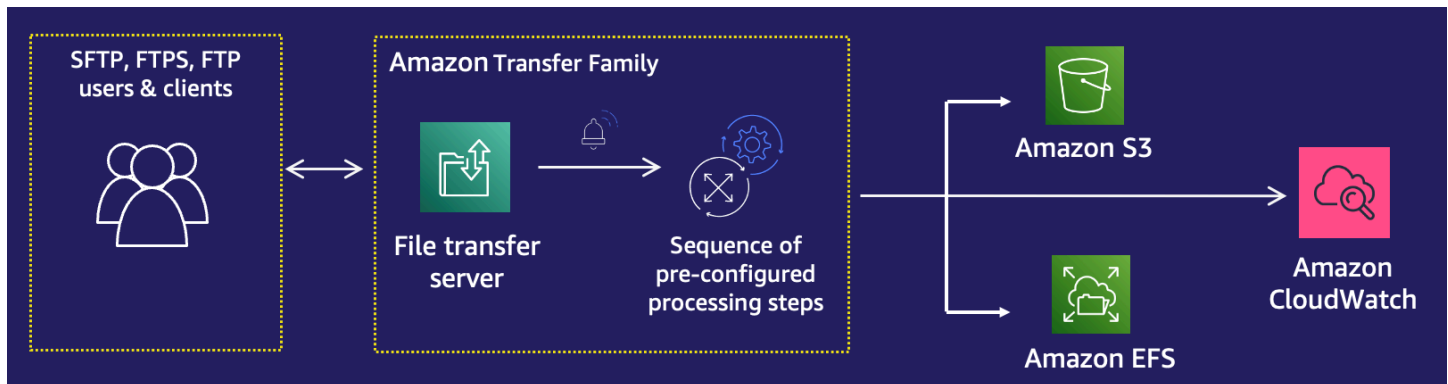

By orchestrating file-processing tasks, managed workflows help you preprocess data before it is consumed by your downstream applications. Such file-processing tasks might include:

- Moving files to user-specific folders.
- Decrypting files as part of a workflow.
- Tagging files.
- Performing custom processing by creating and attaching an Amazon Lambda function to a workflow.
- Sending notifications when a file has been successfully transferred. (For a blog post that details this use case, see [Customize file delivery notifications using Amazon Transfer Family managed workflows.](#))

To quickly replicate and standardize common post-upload file processing tasks spanning multiple business units in your organization, you can deploy workflows by using infrastructure as code (IaC). You can specify a managed workflow to be initiated on files that are uploaded in full. You can also specify a different managed workflow to be initiated on files that are only partially uploaded because of a premature session disconnect. Built-in exception handling helps you quickly react to file-processing outcomes, while offering you control over how to handle failures. In addition, each workflow step produces detailed logs, which you can audit to trace the data lineage.

To get started, perform the following tasks:

1. Set up your workflow to contain preprocessing actions, such as copying, tagging, and other steps based on your requirements. See [Create a workflow](#) for details.
2. Configure an execution role, which Transfer Family uses to run the workflow. See [IAM policies for workflows](#) for details.
3. Map the workflow to a server, so that on file arrival, the actions specified in this workflow are evaluated and initiated in real time. See [Configure and run a workflow](#) for details.

Related information

- To monitor your workflow executions, see [Using CloudWatch metrics for Transfer Family servers](#).
- For detailed execution logs and troubleshooting information, see [Troubleshoot workflow-related errors using Amazon CloudWatch](#).
- Transfer Family provides a blog post and a workshop that walk you through building a file transfer solution. This solution leverages Amazon Transfer Family for managed SFTP/FTPS endpoints and Amazon Cognito and DynamoDB for user management.

The blog post is available at [Using Amazon Cognito as an identity provider with Amazon Transfer Family and Amazon S3](#). You can view the details for the workshop [here](#).

-

Topics

- [Create a workflow](#)
- [Use predefined steps](#)
- [Use custom file-processing steps](#)
- [IAM policies for workflows](#)
- [Exception handling for a workflow](#)
- [Monitor workflow execution](#)
- [Create a workflow from a template](#)
- [Remove a workflow from a Transfer Family server](#)
- [Managed workflows restrictions and limitations](#)

For more help getting started with managed workflows, see the [Building a cloud-native file transfer platform using Amazon Transfer Family workflows blog post](#).

Create a workflow

You can create a managed workflow by using the Amazon Web Services Management Console, as described in this topic. To make the workflow creation process as easy as possible, contextual help panels are available for most of the sections in the console.

A workflow has two kinds of steps:

- **Nominal steps** – Nominal steps are file-processing steps that you want to apply to incoming files. If you select more than one nominal step, each step is processed in a linear sequence.
- **Exception-handling steps** – Exception handlers are file-processing steps that Amazon Transfer Family executes in case any nominal steps fail or result in validation errors.

Create a workflow

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Workflows**.
3. On the **Workflows** page, choose **Create workflow**.
4. On the **Create workflow** page, enter a description. This description appears on the **Workflows** page.
5. In the **Nominal steps** section, choose **Add step**. Add one or more steps.
 - a. Choose a step type from the available options. For more information about the various step types, see [the section called "Use predefined steps"](#).
 - b. Choose **Next**, then configure parameters for the step.
 - c. Choose **Next**, then review the details for the step.
 - d. Choose **Create step** to add the step and continue.
 - e. Continue adding steps as needed. The maximum number of steps in a workflow is 8.
 - f. After you have added all of the necessary nominal steps, scroll down to the **Exception handlers – optional** section, and choose **Add step**.

Note

So that you are informed of failures in real time, we recommend that you set up exception handlers and steps to execute when your workflow fails.

6. To configure exception handlers, add steps in the same manner as described previously. If a file causes any step to throw an exception, your exception handlers are invoked one by one.
7. (Optional) Scroll down to the **Tags** section, and add tags for your workflow.
8. Review the configuration, and choose **Create workflow**.

Important

After you've created a workflow, you can't edit it, so make sure to review the configuration carefully.

Configure and run a workflow

Before you can run a workflow, you need to associate it with a Transfer Family server.

To configure Transfer Family to run a workflow on uploaded files

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Servers**.
 - To add the workflow to an existing server, choose the server that you want to use for your workflow.
 - Alternatively, create a new server and add the workflow to it. For more information, see [Configuring an SFTP, FTPS, or FTP server endpoint](#).
3. On the details page for the server, scroll down to the **Additional details** section, and then choose **Edit**.

Note

By default, servers do not have any associated workflows. You use the **Additional details** section to associate a workflow with the selected server.

4. On the **Edit additional details** page, in the **Managed workflows** section, select a workflow to be run on all uploads.

Note

If you do not already have a workflow, choose **Create a new Workflow** to create one.

- a. Choose the workflow ID to use.
- b. Choose an execution role. This is the role that Transfer Family assumes when executing the workflow's steps. For more information, see [IAM policies for workflows](#). Choose **Save**.

The screenshot shows the 'Managed workflows' section of the Amazon Transfer Family console. It is titled 'Managed workflows Info'. There are three main configuration areas:

- Workflow for complete file uploads:** A dropdown menu with a placeholder 'w-...', a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Workflow for partial file uploads:** A dropdown menu with a placeholder 'w-...', a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Managed workflows execution role:** A dropdown menu with a placeholder '...', a refresh button, and an 'Info' link.

Note

If you no longer want a workflow to be associated with the server, you can remove the association. For details, see [Remove a workflow from a Transfer Family server](#).

To execute a workflow

To execute a workflow, you upload a file to a Transfer Family server that you configured with an associated workflow.

Note

Anytime you remove a workflow from a server and replace it with a new one, or update server configuration (which impacts a workflow's execution role), you must wait approximately 10 minutes before executing the new workflow. The Transfer Family server caches the workflow details, and it takes 10 minutes for the server to refresh its cache. Additionally, you must log out of any active SFTP sessions, and then log back in after the 10-minute waiting period to see the changes.

Example

```
# Execute a workflow
> sftp bob@s-1234567890abcdef0.server.transfer.us-east-1.amazonaws.com

Connected to s-1234567890abcdef0.server.transfer.us-east-1.amazonaws.com.
sftp> put doc1.pdf
Uploading doc1.pdf to /amzn-s3-demo-bucket/home/users/bob/doc1.pdf
doc1.pdf                                     100% 5013KB
 601.0KB/s   00:08
sftp> exit
>
```

After your file has been uploaded, the action defined is performed on your file. For example, if your workflow contains a copy step, the file is copied to the location that you defined in that step. You can use Amazon CloudWatch Logs to track the steps that executed and their execution status.

View workflow details

You can view details about previously created workflows or to workflow executions. To view these details, you can use the console or the Amazon Command Line Interface (Amazon CLI).

Console**View workflow details**

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Workflows**.
3. On the **Workflows** page, choose a workflow.

The workflow details page opens.

SFTP, FTPS, & FTP > Workflows > w-5013d11146dbda607

W- [redacted] Delete

Description

Workflow description
test workflow

Nominal steps

Steps that are executed, in order, on every uploaded file

Tag file

Step name

Tags

Key	Value
my-key	my-value

Exception handlers

No exception handlers
This workflow contains no exception handlers

Recent executions (0)

Find executions

Execution ID	Status	Input filename	Server ID	Username
No executions No executions to display				

CLI

To view the workflow details, use the `describe-workflow` CLI command, as shown in the following example. Replace the workflow ID `w-1234567890abcdef0` with your own value. For more information, see [describe-workflow](#) in the *Amazon CLI Command Reference*.

```
# View Workflow details
> aws transfer describe-workflow --workflow-id w-1234567890abcdef0
{
  "Workflow": {
    "Arn": "arn:aws-cn:transfer:us-east-1:111122223333:workflow/
w-1234567890abcdef0",
```

```
"WorkflowId": "w-1234567890abcdef0",
>Name": "Copy file to shared_files",
>Steps": [
>  {
>    "Type": "COPY",
>    "CopyStepDetails": {
>      "Name": "Copy to shared",
>      "FileLocation": {
>        "S3FileLocation": {
>          "Bucket": "amzn-s3-demo-bucket",
>          "Key": "home/shared_files/"
>        }
>      }
>    }
>  },
>  {
>    "Name": "Copy to shared",
>    "FileLocation": {
>      "S3FileLocation": {
>        "Bucket": "amzn-s3-demo-bucket",
>        "Key": "home/shared_files/"
>      }
>    }
>  }
>]
>OnError": {}
}
```

If your workflow was created as part of an Amazon CloudFormation stack, you can manage the workflow using the Amazon CloudFormation console (<https://console.amazonaws.cn/cloudformation>).

Transfer Family > Workflows > workflow-3206-2474

Workflow-3206-2474

Delete

 This workflow belongs to the  CloudFormation stack **WorkflowStack**. [Manage this stack](#) on the CloudFormation console.

Description

Workflow description

-

Nominal steps (1) [Info](#)

Number	Description	Type	Configuration
1	tagFileForArchive	TAG	Details

Exception handlers (0) [Info](#)

Number	Description	Type	Configuration
--------	-------------	------	---------------

Use predefined steps

When you're creating a workflow, you can choose to add one of the following predefined steps discussed in this topic. You can also choose to add your own custom file-processing steps. For more information, see [the section called "Use custom file-processing steps"](#).

Topics

- [Copy file](#)
- [Decrypt file](#)
- [Tag file](#)
- [Delete file](#)
- [Named variables for workflows](#)
- [Example tag and delete workflow](#)

Copy file

A copy file step creates a copy of the uploaded file in a new Amazon S3 location. Currently, you can use a copy file step only with Amazon S3.

The following copy file step copies files into the test folder in *amzn-s3-demo-destination-bucket*.

If the copy file step is not the first step of your workflow, you can specify the **File location**. By specifying the file location, you can copy either the file that was used in the previous step or the original file that was uploaded. You can use this feature to make multiple copies of the original file while keeping the source file intact for file archival and records retention. For an example, see [Example tag and delete workflow](#).

Configure copy parameters

Step name

File location

Select the file location to use as an input for this step

Copy the file created from previous step to a new location
Input file is selected from the previous step's output

Copy the original source file to a new location
Originally uploaded file

Destination bucket name

Destination key prefix

If you are copying files into a folder, specify / at the end of the prefix name. Use `${transfer:UserName}` or `${transfer:UploadDate}` to parametrize destination prefix by username or upload date respectively.

Overwrite existing

Provide the bucket and key details

You must provide the bucket name and a key for the destination of the copy file step. The key can be either a path name or a file name. Whether the key is treated as a path name or a file name is determined by whether you end the key with the forward slash (/) character.

If the final character is /, your file is copied to the folder, and its name does not change. If the final character is alphanumeric, your uploaded file is renamed to the key value. In this case, if a file with that name already exists, the behavior depends on the setting for the **Overwrite existing** field.

- If **Overwrite existing** is selected, the existing file is replaced with the file being processed.
- If **Overwrite existing** is not selected, nothing happens, and the workflow processing stops.

Tip

If concurrent writes are executed on the same file path, it may result in unexpected behavior when overwriting files.

For example, if your key value is `test/`, your uploaded files are copied to the `test` folder. If your key value is `test/today`, (and **Overwrite existing** is selected) every file you upload is copied to a file named `today` in the `test` folder, and each succeeding file overwrites the previous one.

Note

Amazon S3 supports buckets and objects, and there is no hierarchy. However, you can use prefixes and delimiters in object key names to imply a hierarchy and organize your data in a way similar to folders.

Use a named variable in a copy file step

In a copy file step, you can use a variable to dynamically copy your files into user-specific folders. Currently, you can use `${transfer:UserName}` or `${transfer:UploadDate}` as a variable to copy files to a destination location for the given user who's uploading files, or based on the current date.

In the following example, if the user `richard-roe` uploads a file, it gets copied into the `amzn-s3-demo-destination-bucket/richard-roe/processed/` folder. If the user `mary-major` uploads a file, it gets copied into the `amzn-s3-demo-destination-bucket/mary-major/processed/` folder.

Configure parameters

Configure copy parameters

Step name

Destination bucket name

Destination key prefix

If you are copying files into a folder, specify / at the end of the prefix name. Use `${transfer:UserName}` or `${transfer:UploadDate}` to parametrize destination prefix by username or upload date respectively.

Overwrite existing

Similarly, you can use `${transfer:UploadDate}` as a variable to copy files to a destination location named for the current date. In the following example, if you set the destination to `${transfer:UploadDate}/processed` on February 1, 2022, files uploaded are copied into the `amzn-s3-demo-destination-bucket/2022-02-01/processed/` folder.

Configure copy parameters

Step name

Destination bucket name

Destination key prefix

If you are copying files into a folder, specify / at the end of the prefix name. Use `${transfer:UserName}` or `${transfer:UploadDate}` to parametrize destination prefix by username or upload date respectively.

Overwrite existing

You can also use both of these variables together, combining their functionality. For example, you could set the **Destination key prefix** to `folder/${transfer:UserName}/${transfer:UploadDate}/`, which would create nested folders, for example `folder/marymajor/2023-01-05/`.

IAM permissions for copy step

To allow a copy step to succeed, make sure the execution role for your workflow contains the following permissions.

```
{
  "Sid": "ListBucket",
  "Effect": "Allow",
  "Action": "s3:ListBucket",
  "Resource": [
    "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket"
  ]
},
{
```

```
"Sid": "HomeDirObjectAccess",
"Effect": "Allow",
"Action": [
    "s3:PutObject",
    "s3:GetObject",
    "s3:DeleteObjectVersion",
    "s3:DeleteObject",
    "s3:GetObjectVersion"
],
"Resource": "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket/*"
}
```

Note

The `s3:ListBucket` permission is only necessary if you do not select **Overwrite existing**. This permission checks your bucket to see if a file with the same name already exists. If you have selected **Overwrite existing**, the workflow doesn't need to check for the file, and can just write it.

If your Amazon S3 files have tags, you need to add one or two permissions to your IAM policy.

- Add `s3:GetObjectTagging` for an Amazon S3 file that isn't versioned.
- Add `s3:GetObjectVersionTagging` for an Amazon S3 file that is versioned.

Decrypt file

The Amazon storage blog has a post that describes how to simply decrypt files without writing any code using Transfer Family Managed workflows, [Encrypt and decrypt files with PGP and Amazon Transfer Family](#).

Supported symmetric encryption algorithms

For PGP decryption, Transfer Family supports the following symmetric encryption algorithms: IDEA, 3DES, CAST5, Blowfish, DES, AES-128, AES-192, AES-256, TwoFish, CAMELLIA-128, CAMELLIA-192, CAMELLIA-256

The FIPS-compliant symmetric encryption algorithms are AES-128, AES-192, AES-256, and 3DES.

Use PGP decryption in your workflow

Transfer Family has built-in support for Pretty Good Privacy (PGP) decryption. You can use PGP decryption on files that are uploaded over SFTP, FTPS, or FTP to Amazon Simple Storage Service (Amazon S3) or Amazon Elastic File System (Amazon EFS).

To use PGP decryption, you must create and store the PGP private keys that will be used for decryption of your files. Your users can then encrypt files by using corresponding PGP encryption keys before uploading the files to your Transfer Family server. After you receive the encrypted files, you can decrypt those files in your workflow. For a detailed tutorial, see [Setting up a managed workflow for decrypting a file](#).

To use PGP decryption in your workflow

1. Identify a Transfer Family server to host your workflow, or create a new one. You need to have the server ID before you can store your PGP keys in Amazon Secrets Manager with the correct secret name.
2. Store your PGP key in Amazon Secrets Manager under the required secret name. For details, see [Manage PGP keys](#). Workflows can automatically locate the correct PGP key to be used for decryption based on the secret name in Secrets Manager.

Note

When you store secrets in Secrets Manager, your Amazon Web Services account incurs charges. For information about pricing, see [Amazon Secrets Manager Pricing](#).

3. Encrypt a file by using your PGP key pair. (For a list of supported clients, see [Supported PGP clients](#).) If you are using the command line, run the following command. To use this command, replace *username@example.com* with the email address that you used to create the PGP key pair. Replace *testfile.txt* with the name of the file that you want to encrypt.

```
gpg -e -r username@example.com testfile.txt
```

4. Upload the encrypted file to your Transfer Family server.
5. Configure a decryption step in your workflow. For more information, see [Add a decryption step](#).

Add a decryption step

A decryption step decrypts an encrypted file that was uploaded to Amazon S3 or Amazon EFS as part of your workflow. For details about configuring decryption, see [Use PGP decryption in your workflow](#).

When you create your decryption step for a workflow, you must specify the destination for the decrypted files. You must also select whether to overwrite existing files if a file already exists at the destination location. You can monitor the decryption workflow results and get audit logs for each file in real time by using Amazon CloudWatch Logs.

After you choose the **Decrypt file** type for your step, the **Configure parameters** page appears. Fill in the values for the **Configure PGP decryption parameters** section.

The available options are as follows:

- **Step name** – Enter a descriptive name for the step.
- **File location** – By specifying the file location, you can decrypt either the file that was used in the previous step or the original file that was uploaded.

Note

This parameter is not available if this step is the first step of the workflow.

- **Destination for decrypted files** – Choose an Amazon S3 bucket or an Amazon EFS file system as the destination for the decrypted file.
 - If you choose Amazon S3, you must provide a destination bucket name and a destination key prefix. To parameterize the destination key prefix by username, enter `${transfer:UserName}` for **Destination key prefix**. Similarly, to parameterize the destination key prefix by upload date, enter `${Transfer:UploadDate}` for **Destination key prefix**.
 - If you choose Amazon EFS, you must provide a destination file system and path.

Note

The storage option that you choose here must match the storage system that's used by the Transfer Family server with which this workflow is associated. Otherwise, you will receive an error when you attempt to run this workflow.

- **Overwrite existing** – If you upload a file, and a file with the same filename already exists at the destination, the behavior depends on the setting for this parameter:
 - If **Overwrite existing** is selected, the existing file is replaced with the file being processed.
 - If **Overwrite existing** is not selected, nothing happens, and the workflow processing stops.

 **Tip**

If concurrent writes are executed on the same file path, it may result in unexpected behavior when overwriting files.

The following screenshot shows an example of the options that you might choose for your decrypt file step.

Step 1

[Choose step type](#)

Step 2

Configure parameters

Step 3

[Review and create](#)

Configure parameters

Configure PGP decryption parameters

Store your PGP private key(s) and passphrase(s) in [Secrets Manager](#). [Learn more](#) 

 Refer to the [Transfer Family pricing page](#)  for pricing details. 

Step name

File location

Select the file location to use as an input for this step

- Apply on the file created from the previous step**
Input file is selected from the previous step's output
- Apply on the original file**
Originally uploaded file

Destination for decrypted files

Choose an S3 bucket or an EFS file system for storing decrypted files.

- Amazon S3**
Store your decrypted files as Amazon S3 objects
- Amazon EFS**
Store your decrypted files in an EFS file system

Destination bucket name

Destination key prefix

If you are decrypting files into a folder, specify / at the end of the prefix name. Use `${transfer:UserName}` or `${transfer:UploadDate}` to parametrize the destination prefix by username or upload date respectively.

- Overwrite existing**
Overwrite if a file with the same file name already exists at the destination.

[Cancel](#)[Previous](#)[Next](#)

IAM permissions for decrypt step

To allow a decrypt step to succeed, make sure the execution role for your workflow contains the following permissions.

```
{
    "Sid": "ListBucket",
    "Effect": "Allow",
    "Action": "s3:ListBucket",
    "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket"
    ]
},
{
    "Sid": "HomeDirObjectAccess",
    "Effect": "Allow",
    "Action": [
        "s3:PutObject",
        "s3:GetObject",
        "s3:DeleteObjectVersion",
        "s3:DeleteObject",
        "s3:GetObjectVersion"
    ],
    "Resource": "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket/*"
},
{
    "Sid": "Decrypt",
    "Effect": "Allow",
    "Action": [
        "secretsmanager:GetSecretValue",
    ],
    "Resource": "arn:aws-cn:secretsmanager:region:account-id:secret:aws/transfer/*"
}
```

Note

The `s3:ListBucket` permission is only necessary if you do not select **Overwrite existing**. This permission checks your bucket to see if a file with the same name already exists. If you have selected **Overwrite existing**, the workflow doesn't need to check for the file, and can just write it.

If your Amazon S3 files have tags, you need to add one or two permissions to your IAM policy.

- Add `s3:GetObjectTagging` for an Amazon S3 file that isn't versioned.
- Add `s3:GetObjectVersionTagging` for an Amazon S3 file that is versioned.

Tag file

To tag incoming files for further downstream processing, use a tag step. Enter the value of the tag that you would like to assign to the incoming files. Currently, the tag operation is supported only if you are using Amazon S3 for your Transfer Family server storage.

The following example tag step assigns `scan_outcome` and `clean` as the tag key and value, respectively.

Configure tag parameters

Step name
tag scan

File location
Select the file location to use as an input for this step

Tag the file created from previous step
Input file is selected from the previous step's output

Tag the original source file
Originally uploaded file

Tags

Key	Value
scan_outcome	clean

Remove tag

Add tag

To allow a tag step to succeed, make sure the execution role for your workflow contains the following permissions.

```
{
```

```

    "Sid": "Tag",
    "Effect": "Allow",
    "Action": [
        "s3:PutObjectTagging",
        "s3:PutObjectVersionTagging"
    ],
    "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
    ]
}

```

Note

If your workflow contains a tag step that runs before either a copy or decrypt step, you need to add one or two permissions to your IAM policy.

- Add `s3:GetObjectTagging` for an Amazon S3 file that isn't versioned.
- Add `s3:GetObjectVersionTagging` for an Amazon S3 file that is versioned.

Delete file

To delete a processed file from a previous workflow step or to delete the originally uploaded file, use a delete file step.

Configure delete parameters

Step name

File location

Select the file location to use as an input for this step

Delete the file created from previous step
Input file is selected from the previous step's output

Delete the original source file
Originally uploaded file

To allow a delete step to succeed, make sure the execution role for your workflow contains the following permissions.

```
{
```

```
        "Sid": "Delete",
        "Effect": "Allow",
        "Action": [
            "s3:DeleteObjectVersion",
            "s3:DeleteObject"
        ],
        "Resource": "arn:aws-cn:secretsmanager:region:account-ID:secret:aws/transfer/*"
    }
}
```

Named variables for workflows

For copy and decrypt steps, you can use a variable to dynamically perform actions. Currently, Amazon Transfer Family supports the following named variables.

- Use `${transfer:UserName}` to copy or decrypt files to a destination based on the user who's uploading the files.
- Use `${transfer:UploadDate}` to copy or decrypt files to a destination location based on the current date.

Example tag and delete workflow

The following example illustrates a workflow that tags incoming files that need to be processed by a downstream application, such as a data analytics platform. After tagging the incoming file, the workflow then deletes the originally uploaded file to save on storage costs.

Console

Example tag and move workflow

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Workflows**.
3. On the **Workflows** page, choose **Create workflow**.
4. On the **Create workflow** page, enter a description. This description appears on the **Workflows** page.
5. Add the first step (copy).
 - a. In the **Nominal steps** section, choose **Add step**.

- b. Choose **Copy file**, then choose **Next**.
- c. Enter a step name, then select a destination bucket and a key prefix.

Step 1
Choose step type

Step 2
Configure parameters

Step 3
Review and create

Configure parameters

Configure copy parameters

Step name
copy-step-first-step

Destination bucket name
example-bucket ▼

Destination key prefix
If you are copying files into a folder, specify / at the end of the prefix name. Use `${transfer:UserName}` or `${transfer:UploadDate}` to parametrize destination prefix by username or upload date respectively.

test/

Overwrite existing

- d. Choose **Next**, then review the details for the step.
 - e. Choose **Create step** to add the step and continue.
6. Add the second step (tag).
- a. In the **Nominal steps** section, choose **Add step**.
 - b. Choose **Tag file**, then choose **Next**.
 - c. Enter a step name.
 - d. For **File location**, select **Tag the file created from previous step**.
 - e. Enter a **Key** and **Value**.

Configure tag parameters

Step name
tag scan

File location
Select the file location to use as an input for this step

- Tag the file created from previous step
Input file is selected from the previous step's output
- Tag the original source file
Originally uploaded file

Tags

Key	Value
scan_outcome	clean

- f. Choose **Next**, then review the details for the step.
 - g. Choose **Create step** to add the step and continue.
7. Add the third step (delete).
- a. In the **Nominal steps** section, choose **Add step**.
 - b. Choose **Delete file**, then choose **Next**.

Configure delete parameters

Step name
delete original file

File location
Select the file location to use as an input for this step

- Delete the file created from previous step
Input file is selected from the previous step's output
- Delete the original source file
Originally uploaded file

- c. Enter a step name.

- d. For **File location**, select **Delete the original source file**.
 - e. Choose **Next**, then review the details for the step.
 - f. Choose **Create step** to add the step and continue.
8. Review the workflow configuration, and then choose **Create workflow**.

CLI

Example tag and move workflow

1. Save the following code into a file; for example, `tagAndMoveWorkflow.json`. Replace each *user input placeholder* with your own information.

```
[
  {
    "Type": "COPY",
    "CopyStepDetails": {
      "Name": "CopyStep",
      "DestinationFileLocation": {
        "S3FileLocation": {
          "Bucket": "amzn-s3-demo-bucket",
          "Key": "test/"
        }
      }
    }
  },
  {
    "Type": "TAG",
    "TagStepDetails": {
      "Name": "TagStep",
      "Tags": [
        {
          "Key": "name",
          "Value": "demo"
        }
      ],
      "SourceFileLocation": "${previous.file}"
    }
  },
  {
    "Type": "DELETE",
    "DeleteStepDetails":{
```

```

        "Name": "DeleteStep",
        "SourceFileLocation": "${original.file}"
    }
}
]

```

The first step copies the uploaded file to a new Amazon S3 location. The second step adds a tag (key-value pair) to the file (previous .file) that was copied to the new location. And, finally, the third step deletes the original file (original.file).

2. Create a workflow from the saved file. Replace each *user input placeholder* with your own information.

```

aws transfer create-workflow --description "short-description" --steps
file://path-to-file --region region-ID

```

For example:

```

aws transfer create-workflow --description "copy-tag-delete workflow" --steps
file://tagAndMoveWorkflow.json --region us-east-1

```

Note

For more details about using files to load parameters, see [How to load parameters from a file](#).

3. Update an existing server.

Note

This step assumes you already have a Transfer Family server and you want to associate a workflow with it. If not, see [Configuring an SFTP, FTPS, or FTP server endpoint](#). Replace each *user input placeholder* with your own information.

```

aws transfer update-server --server-id server-ID --region region-ID
--workflow-details '{"OnUpload": [{ "WorkflowId": "workflow-ID", "ExecutionRole": "execution-role-ARN" } ]}'

```

For example:

```
aws transfer update-server --server-id s-1234567890abcdef0 --region us-east-2
  --workflow-details '{"OnUpload":[{"WorkflowId": "w-
  abcdef01234567890","ExecutionRole": "arn:aws-cn:iam::111111111111:role/nikki-
  wolf-execution-role"}]}'
```

Use custom file-processing steps

By using a custom file-processing step, you can Bring Your Own file-processing logic using Amazon Lambda. Upon file arrival, a Transfer Family server invokes a Lambda function that contains custom file-processing logic, such as encrypting files, scanning for malware, or checking for incorrect file types. In the following example, the target Amazon Lambda function is used to process the output file from the previous step.

Configure custom parameters

Step name

File location

Select the file location to use as an input for this step

Apply custom processing to the file created from previous step
Input file is selected from the previous step's output

Apply custom processing to the original source file
Originally uploaded file

Target

Timeout (seconds)

Note

For an example Lambda function, see [Example Lambda function for a custom workflow step](#). For example events (including the location for files passed into the Lambda), see [Example events sent to Amazon Lambda upon file upload](#).

With a custom workflow step, you must configure the Lambda function to call the [SendWorkflowStepState](#) API operation. `SendWorkflowStepState` notifies the workflow execution that the step was completed with either a success or a failure status. The status of the `SendWorkflowStepState` API operation invokes an exception handler step or a nominal step in the linear sequence, based on the outcome of the Lambda function.

If the Lambda function fails or times out, the step fails, and you see `StepErrored` in your CloudWatch logs. If the Lambda function is part of the nominal step and the function responds to `SendWorkflowStepState` with `Status="FAILURE"` or times out, the flow continues with the exception handler steps. In this case, the workflow does not continue to execute the remaining (if any) nominal steps. For more details, see [Exception handling for a workflow](#).

When you call the `SendWorkflowStepState` API operation, you must send the following parameters:

```
{
  "ExecutionId": "string",
  "Status": "string",
  "Token": "string",
  "WorkflowId": "string"
}
```

You can extract the `ExecutionId`, `Token`, and `WorkflowId` from the input event that is passed when the Lambda function executes (examples are shown in the following sections). The `Status` value can be either `SUCCESS` or `FAILURE`.

To be able to call the `SendWorkflowStepState` API operation from your Lambda function, you must use a version of the Amazon SDK that was published after [Managed Workflows were introduced](#).

Using multiple Lambda functions consecutively

When you use multiple custom steps one after the other, the **File location** option works differently than if you use only a single custom step. Transfer Family doesn't support passing the Lambda-processed file back to use as the next step's input. So, if you have multiple custom steps all configured to use the `previous.file` option, they all use the same file location (the input file location for the first custom step).

Note

The `previous.file` setting also works differently if you have a predefined step (tag, copy, decrypt, or delete) after a custom step. If the predefined step is configured to use the `previous.file` setting, the predefined step uses the same input file that's used by the custom step. The processed file from the custom step is not passed to the predefined step.

Accessing a file after custom processing

If you're using Amazon S3 as your storage, and if your workflow includes a custom step that performs actions on the originally uploaded file, subsequent steps cannot access that processed file. That is, any step after the custom step cannot reference the updated file from the custom step output.

For example, suppose that you have the following three steps in your workflow.

- **Step 1** – Upload a file named `example-file.txt`.
- **Step 2** – Invoke a Lambda function that changes `example-file.txt` in some way.
- **Step 3** – Attempt to perform further processing on the updated version of `example-file.txt`.

If you configure the `sourceFileLocation` for Step 3 to be `${original.file}`, Step 3 uses the original file location from when the server uploaded the file to storage in Step 1. If you're using `${previous.file}` for Step 3, Step 3 reuses the file location that Step 2 used as input.

Therefore, Step 3 causes an error. For example, if step 3 attempts to copy the updated `example-file.txt`, you receive the following error:

```
{
  "type": "StepErrored",
```

```
"details": {
  "errorType": "NOT_FOUND",
  "errorMessage": "ETag constraint not met (Service: null; Status Code: 412;
Error Code: null; Request ID: null; S3 Extended Request ID: null; Proxy: null)",
  "stepType": "COPY",
  "stepName": "CopyFile"
},
```

This error occurs because the custom step modifies the entity tag (ETag) for `example-file.txt` so that it doesn't match the original file.

Note

This behavior doesn't occur if you're using Amazon EFS because Amazon EFS doesn't use entity tags to identify files.

Example events sent to Amazon Lambda upon file upload

The following examples show the events that are sent to Amazon Lambda when a file upload is complete. One example uses a Transfer Family server where the domain is configured with Amazon S3. The other example uses a Transfer Family server where the domain uses Amazon EFS.

Custom step that uses an Amazon S3 domain

```
{
  "token": "MzI0Nzc4ZDktMGRmMi00MjFhLTgxMjUtYWZmZmRmODNkYjc0",
  "serviceMetadata": {
    "executionDetails": {
      "workflowId": "w-1234567890example",
      "executionId": "abcd1234-aa11-bb22-cc33-abcdef123456"
    },
    "transferDetails": {
      "sessionId": "36688ff5d2deda8c",
      "userName": "myuser",
      "serverId": "s-example1234567890"
    }
  },
  "fileLocation": {
    "domain": "S3",
    "bucket": "amzn-s3-demo-bucket",
    "key": "path/to/mykey",
```

```

    "eTag": "d8e8fca2dc0f896fd7cb4cb0031ba249",
    "versionId": null
  }
}

```

Custom step that uses an Amazon EFS domain

```

{
  "token": "MTg0N2Y3N2UtNWI5Ny00ZmZlLTk5YTgtZTU3YzViYjllNmZm",
  "serviceMetadata": {
    "executionDetails": {
      "workflowId": "w-1234567890example",
      "executionId": "abcd1234-aa11-bb22-cc33-abcdef123456"
    },
    "transferDetails": {
      "sessionId": "36688ff5d2deda8c",
      "userName": "myuser",
      "serverId": "s-example1234567890"
    }
  },
  "fileLocation": {
    "domain": "EFS",
    "fileSystemId": "fs-1234567",
    "path": "/path/to/myfile"
  }
}

```

Example Lambda function for a custom workflow step

The following Lambda function extracts the information regarding the execution status, and then calls the [SendWorkflowStepState](#) API operation to return the status to the workflow for the step—either SUCCESS or FAILURE. Before your function calls the `SendWorkflowStepState` API operation, you can configure Lambda to take an action based on your workflow logic.

```

import json
import boto3

transfer = boto3.client('transfer')

def lambda_handler(event, context):
    print(json.dumps(event))

```

```
# call the SendWorkflowStepState API to notify the workflow about the step's
SUCCESS or FAILURE status
response = transfer.send_workflow_step_state(
    WorkflowId=event['serviceMetadata']['executionDetails']['workflowId'],
    ExecutionId=event['serviceMetadata']['executionDetails']['executionId'],
    Token=event['token'],
    Status='SUCCESS|FAILURE'
)

print(json.dumps(response))

return {
    'statusCode': 200,
    'body': json.dumps(response)
}
```

IAM permissions for a custom step

To allow a step that calls a Lambda to succeed, make sure the execution role for your workflow contains the following permissions.

```
{
    "Sid": "Custom",
    "Effect": "Allow",
    "Action": [
        "lambda:InvokeFunction"
    ],
    "Resource": [
        "arn:aws-cn:lambda:region:account-id:function:function-name"
    ]
}
```

IAM policies for workflows

When you add a workflow to a server, you must select an execution role. The server uses this role when it executes the workflow. If the role does not have the proper permissions, Amazon Transfer Family cannot run the workflow.

This section describes one possible set of Amazon Identity and Access Management (IAM) permissions that you can use to execute a workflow. Other examples are described later in this topic.

Note

If your Amazon S3 files have tags, you need to add one or two permissions to your IAM policy.

- Add `s3:GetObjectTagging` for an Amazon S3 file that isn't versioned.
- Add `s3:GetObjectVersionTagging` for an Amazon S3 file that is versioned.

To create an execution role for your workflow

1. Create a new IAM role, and add the Amazon managed policy `AWSTransferFullAccess` to the role. For more information about creating a new IAM role, see [the section called “Create an IAM role and policy”](#).
2. Create another policy with the following permissions, and attach it to your role. Replace each *user input placeholder* with your own information.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "ConsoleAccess",
      "Effect": "Allow",
      "Action": "s3:GetBucketLocation",
      "Resource": "*"
    },
    {
      "Sid": "ListObjectsInBucket",
      "Effect": "Allow",
      "Action": "s3:ListBucket",
      "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-bucket"
      ]
    },
    {
      "Sid": "AllObjectActions",
      "Effect": "Allow",
```

```

    "Action": "s3:*Object",
    "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
    ]
},
{
    "Sid": "GetObjectVersion",
    "Effect": "Allow",
    "Action": "s3:GetObjectVersion",
    "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
    ]
},
{
    "Sid": "Custom",
    "Effect": "Allow",
    "Action": [
        "lambda:InvokeFunction"
    ],
    "Resource": [
        "arn:aws-cn:lambda:region:account-id:function:function-name"
    ]
},
{
    "Sid": "Tag",
    "Effect": "Allow",
    "Action": [
        "s3:PutObjectTagging",
        "s3:PutObjectVersionTagging"
    ],
    "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-bucket/*"
    ]
}
]
}

```

3. Save this role and specify it as the execution role when you add a workflow to a server.

Note

When you're constructing IAM roles, Amazon recommends that you restrict access to your resources as much as is possible for your workflow.

Workflow trust relationships

Workflow execution roles also require a trust relationship with `transfer.amazonaws.com`. To establish a trust relationship for Amazon Transfer Family, see [To establish a trust relationship](#).

While you're establishing your trust relationship, you can also take steps to avoid the *confused deputy* problem. For a description of this problem, as well as examples of how to avoid it, see [the section called "Cross-service confused deputy prevention"](#).

Example execution role: Decrypt, copy, and tag

If you have workflows that include tagging, copying, and decrypt steps, you can use the following IAM policy. Replace each *user input placeholder* with your own information.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "CopyRead",
      "Effect": "Allow",
      "Action": [
        "s3:GetObject",
        "s3:GetObjectTagging",
        "s3:GetObjectVersionTagging"
      ],
      "Resource": "arn:aws-cn:s3:::amzn-s3-demo-source-bucket/*"
    },
    {
      "Sid": "CopyWrite",
      "Effect": "Allow",
      "Action": [
        "s3:PutObject",
        "s3:PutObjectTagging"
      ],
      "Resource": "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket/*"
    }
  ]
}
```



```
    },
    {
      "Sid": "CopyList",
      "Effect": "Allow",
      "Action": "s3:ListBucket",
      "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-source-bucket",
        "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket"
      ]
    },
    {
      "Sid": "Tag",
      "Effect": "Allow",
      "Action": [
        "s3:PutObjectTagging",
        "s3:PutObjectVersionTagging"
      ],
      "Resource": "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket/*",
      "Condition": {
        "StringEquals": {
          "s3:RequestObjectTag/Archive": "yes"
        }
      }
    },
    {
      "Sid": "ListBucket",
      "Effect": "Allow",
      "Action": "s3:ListBucket",
      "Resource": [
        "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket"
      ]
    },
    {
      "Sid": "HomeDirObjectAccess",
      "Effect": "Allow",
      "Action": [
        "s3:PutObject",
        "s3:GetObject",
        "s3:DeleteObjectVersion",
        "s3:DeleteObject",
        "s3:GetObjectVersion"
      ],
      "Resource": "arn:aws-cn:s3:::amzn-s3-demo-destination-bucket/*"
    },
  ],
}
```

```

    {
      "Sid": "Decrypt",
      "Effect": "Allow",
      "Action": [
        "secretsmanager:GetSecretValue"
      ],
      "Resource": "arn:aws-cn:secretsmanager:region:account-ID:secret:aws/
transfer/*"
    }
  ]
}

```

Example execution role: Run function and delete

In this example, you have a workflow that invokes an Amazon Lambda function. If the workflow deletes the uploaded file and has an exception handler step to act upon a failed workflow execution in the previous step, use the following IAM policy. Replace each *user input placeholder* with your own information.

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "Delete",
      "Effect": "Allow",
      "Action": [
        "s3:DeleteObject",
        "s3:DeleteObjectVersion"
      ],
      "Resource": "arn:aws-cn:s3:::bucket-name"
    },
    {
      "Sid": "Custom",
      "Effect": "Allow",
      "Action": [
        "lambda:InvokeFunction"
      ],
      "Resource": [
        "arn:aws-cn:lambda:region:account-id:function:function-name"
      ]
    }
  ]
}

```

}

Exception handling for a workflow

If any errors occur during a workflow's execution, the exception-handling steps that you specified are executed. You specify the error-handling steps for a workflow in the same manner as you specify the nominal steps for the workflow. For example, suppose that you've configured custom processing in nominal steps to validate incoming files. If the file validation fails, an exception-handling step can send an email to the administrator.

The following example workflow contains two steps:

- One nominal step that checks whether the uploaded file is in CSV format
- An exception-handling step that sends an email in case the uploaded file is not in CSV format, and the nominal step fails

To initiate the exception-handling step, the Amazon Lambda function in the nominal step must respond with `Status="FAILURE"`. For more information about error handling in workflows, see [the section called "Use custom file-processing steps"](#).

w-1234567890abcdef0
Delete

Description

<p>Name Delete after upload</p>	<p>Workflow description test-my-workflow</p>
-------------------------------------	--

Nominal steps (1) [Info](#)

Number	Description	Type	Configuration
1	is-CSV	CUSTOM	Details

Exception handlers (1) [Info](#)

Number	Description	Type	Configuration
1	send-email	CUSTOM	Details

Monitor workflow execution

Amazon CloudWatch monitors your Amazon resources and the applications that you run in the Amazon Web Services Cloud in real time. You can use Amazon CloudWatch to collect and track metrics, which are variables that you can measure for your workflows. You can view workflow metrics and consolidated logs by using Amazon CloudWatch.

CloudWatch logging for a workflow

CloudWatch provides consolidated auditing and logging for workflow progress and results.

View Amazon CloudWatch logs for workflows

1. Open the Amazon CloudWatch console at <https://console.amazonaws.cn/cloudwatch/>.
2. In the left navigation pane, choose **Logs**, then choose **Log groups**.
3. On the **Log groups** page, on the navigation bar, choose the correct Region for your Amazon Transfer Family server.
4. Choose the log group that corresponds to your server.

For example, if your server ID is `s-1234567890abcdef0`, your log group is `/aws/transfer/s-1234567890abcdef0`.

5. On the log group details page for your server, the most recent log streams are displayed. There are two log streams for the user that you are exploring:
 - One for each Secure Shell (SSH) File Transfer Protocol (SFTP) session.
 - One for the workflow that is being executed for your server. The format for the log stream for the workflow is `username.workflowID.uniqueStreamSuffix`.

For example, if your user is `mary-major`, you have the following log streams:

```
mary-major-east.1234567890abcdef0
mary.w-abcdef01234567890.021345abcdef6789
```

Note

The 16-digit alphanumeric identifiers listed in this example are fictitious. The values that you see in Amazon CloudWatch are different.

The **Log events** page for `mary-major-usa-east.1234567890abcdef0` displays the details for each user session, and the `mary.w-abcdef01234567890.021345abcdef6789` log stream contains the details for the workflow.

The following is a sample log stream for `mary.w-abcdef01234567890.021345abcdef6789`, based on a workflow (`w-abcdef01234567890`) that contains a copy step.

```
{
  "type": "ExecutionStarted",
  "details": {
    "input": {
      "initialFileLocation": {
        "bucket": "amzn-s3-demo-bucket",
        "key": "mary/workflowSteps2.json",
        "versionId": "version-id",
        "etag": "etag-id"
      }
    }
  },
  "workflowId": "w-abcdef01234567890",
  "executionId": "execution-id",
  "transferDetails": {
    "serverId": "s-server-id",
    "username": "mary",
    "sessionId": "session-id"
  }
},
{
  "type": "StepStarted",
  "details": {
    "input": {
      "fileLocation": {
        "backingStore": "S3",
        "bucket": "amzn-s3-demo-bucket",
        "key": "mary/workflowSteps2.json",
        "versionId": "version-id",
        "etag": "etag-id"
      }
    },
    "stepType": "COPY",
    "stepName": "copyToShared"
  },
  "workflowId": "w-abcdef01234567890",
```

```
"executionId":"execution-id",
"transferDetails": {
  "serverId":"s-server-id",
  "username":"mary",
  "sessionId":"session-id"
}
},
{
  "type":"StepCompleted",
  "details":{
    "output":{},
    "stepType":"COPY",
    "stepName":"copyToShared"
  },
  "workflowId":"w-abcdef01234567890",
  "executionId":"execution-id",
  "transferDetails":{
    "serverId":"server-id",
    "username":"mary",
    "sessionId":"session-id"
  }
},
{
  "type":"ExecutionCompleted",
  "details": {},
  "workflowId":"w-abcdef01234567890",
  "executionId":"execution-id",
  "transferDetails":{
    "serverId":"s-server-id",
    "username":"mary",
    "sessionId":"session-id"
  }
}
}
```

CloudWatch metrics for workflows

Amazon Transfer Family provides several metrics for workflows. You can view metrics for how many workflows executions started, completed successfully, and failed in the previous minute. All of the CloudWatch metrics for Transfer Family are described in [Using CloudWatch metrics for Transfer Family servers](#).

Create a workflow from a template

You can deploy an Amazon CloudFormation stack that creates a workflow and a server from a template. This procedure contains an example that you can use to quickly deploy a workflow.

To create an Amazon CloudFormation stack that creates an Amazon Transfer Family workflow and server

1. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
2. Save the following code to a file.

YAML

```
AWSTemplateFormatVersion: 2010-09-09
Resources:
  SFTPServer:
    Type: 'AWS::Transfer::Server'
    Properties:
      WorkflowDetails:
        OnUpload:
          - ExecutionRole: workflow-execution-role-arn
            WorkflowId: !GetAtt
              - TransferWorkflow
              - WorkflowId
  TransferWorkflow:
    Type: AWS::Transfer::Workflow
    Properties:
      Description: Transfer Family Workflows Blog
      Steps:
        - Type: COPY
          CopyStepDetails:
            Name: copyToUserKey
            DestinationFileLocation:
              S3FileLocation:
                Bucket: archived-records
                Key: ${transfer:UserName}/
            OverwriteExisting: 'TRUE'
        - Type: TAG
          TagStepDetails:
            Name: tagFileForArchive
            Tags:
              - Key: Archive
```

```

        Value: yes
    - Type: CUSTOM
      CustomStepDetails:
        Name: transferExtract
        Target: arn:aws-cn:lambda:region:account-id:function:function-name
        TimeoutSeconds: 60
    - Type: DELETE
      DeleteStepDetails:
        Name: DeleteInputFile
        SourceFileLocation: '${original.file}'
  Tags:
    - Key: Name
      Value: TransferFamilyWorkflows

```

JSON

```

{
  "AWSTemplateFormatVersion": "2010-09-09",
  "Resources": {
    "SFTPServer": {
      "Type": "AWS::Transfer::Server",
      "Properties": {
        "WorkflowDetails": {
          "OnUpload": [
            {
              "ExecutionRole": "workflow-execution-role-arn",
              "WorkflowId": {
                "Fn::GetAtt": [
                  "TransferWorkflow",
                  "WorkflowId"
                ]
              }
            }
          ]
        }
      }
    }
  },
  "TransferWorkflow": {
    "Type": "Amazon::Transfer::Workflow",
    "Properties": {
      "Description": "Transfer Family Workflows Blog",
      "Steps": [
        {

```



```

        "Type": "COPY",
        "CopyStepDetails": {
            "Name": "copyToUserKey",
            "DestinationFileLocation": {
                "S3FileLocation": {
                    "Bucket": "archived-records",
                    "Key": "${transfer:UserName}/"
                }
            },
            "OverwriteExisting": "TRUE"
        }
    },
    {
        "Type": "TAG",
        "TagStepDetails": {
            "Name": "tagFileForArchive",
            "Tags": [
                {
                    "Key": "Archive",
                    "Value": "yes"
                }
            ]
        }
    },
    {
        "Type": "CUSTOM",
        "CustomStepDetails": {
            "Name": "transferExtract",
            "Target": "arn:aws-cn:lambda:region:account-
id:function:function-name",
            "TimeoutSeconds": 60
        }
    },
    {
        "Type": "DELETE",
        "DeleteStepDetails": {
            "Name": "DeleteInputFile",
            "SourceFileLocation": "${original.file}"
        }
    }
],
"Tags": [
    {
        "Key": "Name",

```

```
    "Value": "TransferFamilyWorkflows"
  }
]
}
}
}
```

3. Replace the following items with your actual values.
 - Replace *workflow-execution-role-arn* with the ARN for an actual workflow execution role. For example, `arn:aws-cn:transfer:us-east-2:111122223333:workflow/w-1234567890abcdef0`
 - Replace `arn:aws-cn:lambda:region:account-id:function:function-name` with the ARN for your Lambda function. For example, `arn:aws-cn:lambda:us-east-2:123456789012:function:example-lambda-idp`.
4. Follow the instructions for deploying an Amazon CloudFormation stack from an existing template in [Selecting a stack template](#) in the *Amazon CloudFormation User Guide*.

After the stack has been deployed, you can view details about it in the **Outputs** tab in the CloudFormation console. The template creates a new Amazon Transfer Family SFTP server that uses service-managed users, and a new workflow, and associates the workflow with the new server.

Remove a workflow from a Transfer Family server

If you have associated a workflow with a Transfer Family server, and you now want to remove that association, you can do so by using the console or programmatically.

Console

To remove a workflow from a Transfer Family server

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Servers**.
3. Choose the identifier for the server in the **Server ID** column.
4. On the details page for the server, scroll down to the **Additional details** section, and then choose **Edit**.

5. On the **Edit additional details** page, in the **Managed workflows** section, clear the information for all settings:
 - Select the dash (-) from the list of workflows for the **Workflow for complete file uploads**.
 - If not already cleared, select the dash (-) from the list of workflows for the **Workflow for partial file uploads**.
 - Select the dash (-) from the list of roles for the **Managed workflows execution role**.

If you don't see the dash, scroll up until you see it, as it is the first value in each menu.

The screen should look like the following.

The screenshot shows the 'Managed workflows' configuration page. It has a title 'Managed workflows' with an 'Info' link. Below the title are three sections:

- Workflow for complete file uploads**: 'Select the workflow that [redacted] Transfer Family should run on all files that are uploaded in full via this server'. It features a dropdown menu with 'Select a workflow', a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Workflow for partial file uploads**: 'Select the workflow that [redacted] Transfer Family should run on all files that are only partially uploaded via this server'. It features a dropdown menu with 'Select a workflow', a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Managed workflows execution role**: 'Select the role that [redacted] Transfer Family should assume when executing a workflow'. It features a dropdown menu with a dash '-' and a refresh button.

6. Scroll down and choose **Save** to save your changes.

CLI

You use the `update-server` (or `UpdateServer` for API) call, and provide empty arguments for the `OnUpload` and `OnPartialUpload` parameters.

From the Amazon CLI, run the following command:

```
aws transfer update-server --server-id your-server-id --workflow-details
'{"OnPartialUpload": [], "OnUpload": []}'
```

Replace *your-server-id* with the ID for your server. For example, if your server ID is, `s-01234567890abcdef`, the command is as follows:

```
aws transfer update-server --server-id s-01234567890abcdef --workflow-details  
'{"OnPartialUpload":[],"OnUpload":[]}'
```

Managed workflows restrictions and limitations

Restrictions

The following restrictions currently apply to post-upload processing workflows for Amazon Transfer Family.

- Cross-account and cross-region Amazon Lambda functions are not supported. You can, however, copy across accounts, provided that your Amazon Identity and Access Management (IAM) policies are correctly configured.
- For all workflow steps, any Amazon S3 buckets accessed by the workflow must be in the same region as the workflow itself.
- For a decryption step, the decryption destination must match the source for Region and backing store (for example, if the file to be decrypted is stored in Amazon S3, then the specified destination must also be in Amazon S3).
- Only asynchronous custom steps are supported.
- Custom step timeouts are approximate. That is, it might take slightly longer to time out than specified. Additionally, the workflow is dependent upon the Lambda function. Therefore, if the function is delayed during execution, the workflow is not aware of the delay.
- If you exceed your throttling limit, Transfer Family doesn't add workflow operations to the queue.
- Workflows are not initiated for files that have a size of 0. Files with a size greater than 0 do initiate the associated workflow.
- You can attach a file-processing workflow to a Transfer Family server that uses the AS2 protocol: however, AS2 messages don't execute workflows attached to the server.

Limitations

Additionally, the following functional limits apply to workflows for Transfer Family:

- The number of workflows per Region, per account, is limited to 10.
- The maximum timeout for custom steps is 30 minutes.

- The maximum number of steps in a workflow is 8.
- The maximum number of tags per workflow is 50.
- The maximum number of concurrent executions that contain a decrypt step is 250 per workflow.
- You can store a maximum of 3 PGP private keys, per Transfer Family server, per user.
- The maximum size for a decrypted file is 10 GB.
- We throttle the new execution rate using a [token bucket](#) system with a burst capacity of 100 and a refill rate of 1.
- Anytime you remove a workflow from a server and replace it with a new one, or update server configuration (which impacts a workflow's execution role), you must wait approximately 10 minutes before executing the new workflow. The Transfer Family server caches the workflow details, and it takes 10 minutes for the server to refresh its cache.

Additionally, you must log out of any active SFTP sessions, and then log back in after the 10-minute waiting period to see the changes.

Managing servers

In this section, you can find information on how to view a list of your servers, how to view your server details, how to edit your server details, and how to change the host key for your SFTP-enabled server.

Topics

- [View a list of servers](#)
- [Delete a server](#)
- [View SFTP, FTPS, and FTP server details](#)
- [View AS2 server details](#)
- [Edit server details](#)
- [Manage host keys for your SFTP-enabled server](#)
- [Monitoring usage in the console](#)

View a list of servers

On the Amazon Transfer Family console, you can find a list of all your servers that are located in the Amazon Region that you chose.

To find a list of your servers that exist in an Amazon Region

- Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.

If you have one or more servers in the current Amazon Region, the console opens to show a list of your servers. If you don't see a list of servers, make sure that you are in the correct Region. You can also choose **Servers** from the navigation pane.

For more information about viewing your server details, see [View SFTP, FTPS, and FTP server details](#).

Delete a server

This procedure explains how to delete a Transfer Family server by using the Amazon Transfer Family console or Amazon CLI.

⚠ Important

You are billed, for each of the protocols enabled to access your endpoint, until you delete the server.

⚠ Warning

Deleting a server results in all its users being deleted. Data in the bucket that was accessed by using the server is not deleted, and remains accessible to Amazon users that have privileges to those Amazon S3 buckets.

Console

To delete a server by using the console

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Servers**.
3. Select the check box of the server that you want to delete.
4. For **Actions**, choose **Delete**.
5. In the confirmation dialog box that appears, enter the word **delete**, and then choose **Delete** to confirm that you want to delete the server.

The server is deleted from the **Servers** page and you are no longer billed for it.

Amazon CLI

To delete a server by using the CLI

1. (Optional) Run the following command to view the details for the server that you want to delete permanently.

```
aws transfer describe-server --server-id your-server-id
```

This `describe-server` command returns all of the details for your server.

2. Run the following command to delete the server.

```
aws transfer delete-server --server-id your-server-id
```

If successful, the command deletes the server and does not return any information.

View SFTP, FTPS, and FTP server details

You can find a list of details and properties for an individual Amazon Transfer Family server. Server properties include protocols, identity provider, status, endpoint type, custom hostname, endpoint, users, logging role, server host key, and tags.

To view server details

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the navigation pane, choose **Servers**.
3. Choose the identifier in the **Server ID** column to see the **Server details** page, shown following.

You can change the server's properties on this page by choosing **Edit**. For more information about editing server details, see [Edit server details](#). The details page for AS2 servers differs slightly. For AS2 servers, see [View AS2 server details](#).

The screenshot displays two panels from the Amazon Transfer Family console. The left panel, titled "Protocols", has an "Edit" button and contains the text "Protocols over which clients can connect to your server's endpoint" followed by a bulleted list with "SFTP". The right panel, titled "Identity provider", also has an "Edit" button and shows "Identity provider type" with a link to "Info". Below this, there are two radio button options: "Custom - Lambda" (which is selected) and "Lambda function". Under "Lambda function", there is a link to "test-UserAuthenticationLambda" with an external link icon.

Note

The server host key **Description** and **Date imported** values are new as of September 2022. These values were introduced to support the multiple host keys feature.

This feature required migration of any single host keys that were in use before the introduction of multiple host keys.

The **Date imported** value for a migrated server host key is set to the last modified date for the server. That is, the date that you see for your migrated host key corresponds

to the date that you last modified the server in any way, before the server host key migration.

The only key that was migrated is your oldest or only server host key. Any additional keys have their actual date from when you imported them. Additionally, the migrated key has a description that makes it easy to identify it as having been migrated.

The migration occurred between September 2 and September 13. The actual migration date within this range depends on the Region of your server.

Additional details

Edit

<p>Log group /aws/transfer/s- </p> <p>Logging role Info -</p> <p>Security Policy Info TransferSecurityPolicy-PQ-SSH-Experimental-2023-04</p>	<p>Domain Amazon S3</p> <p>Login display banner View the display message</p> <p>Optimized directories Info ENABLED</p>	<p>SetStat option Ignore</p> <p>TLS session resumption -</p> <p>Passive IP -</p>
---	---	---

View AS2 server details

You can find a list of details and properties for an individual Amazon Transfer Family server. Server properties include protocols, status, and more. For AS2 servers, you can also view the AS2 asynchronous MDN egress IP addresses.

Protocols

Edit

Protocols over which clients can connect to your server's endpoint

- AS2

Identity provider

Edit

AS2 Auth

Basic authentication is not supported for AS2. Access can be controlled through VPC security groups.

Each AS2 server is assigned three static IP addresses. Use these IP addresses for sending asynchronous MDNs to your trading partners over AS2.

AS2 asynchronous MDN egress IP details

Below are the service managed static IP addresses used for sending your asynchronous MDNs to trading partners over AS2

- [Redacted IP]
- [Redacted IP]
- [Redacted IP]

The bottom portion of the AS2 server details page contains details for any attached workflow and monitoring and tagging information.

Workflows

[Edit](#)

Workflow for complete uploads w- [Redacted] 0	Workflow for partial uploads -	Managed workflows execution role [Redacted] ↗
--	-----------------------------------	--

Monitoring

1h 3h 12h 1d 3d 1w UTC timezone [↻](#) [⌵](#)

BytesIn	BytesOut	FilesIn	FilesOut
<p>No data available. Try adjusting the dashboard time range.</p>	<p>No data available. Try adjusting the dashboard time range.</p>	<p>No data available. Try adjusting the dashboard time range.</p>	<p>No data available. Try adjusting the dashboard time range.</p>

AS2 Monitoring

1h 3h 12h 1d 3d 1w UTC timezone [↻](#) [⌵](#)

InboundMessage	InboundMessage	[Redacted] sage	[Redacted] sage
<p>InboundMessage</p>	<p>No data available. Try adjusting the dashboard time range.</p>	<p>[Redacted] sage</p>	<p>[Redacted] sage</p>

Edit server details

After you create an Amazon Transfer Family server, you can edit the server configuration.

Topics

- [Edit the file transfer protocols](#)
- [Edit custom identity provider parameters](#)
- [Edit the server endpoint](#)
- [Edit your logging configuration](#)
- [Edit the security policy](#)
- [Change the managed workflow for your server](#)
- [Change the display banners for your server](#)
- [Put your server online or offline](#)

To edit a server's configuration

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Servers**.
3. Choose the identifier in the **Server ID** column to see the **Server details** page, shown following.

You can change the server's properties on this page by choosing **Edit**:

- To change the protocols, see [Edit the file transfer protocols](#).
- For the identity provider, note that you can't change a server's identity provider type after you create the server. To change the identity provider, delete the server and create a new one with the identity provider that you want.

Note

If your server uses a custom identity provider, you can edit some properties. For details, see [Edit custom identity provider parameters](#).

- To change the endpoint type or custom hostname, see [Edit the server endpoint](#).
- To add an agreement, you need to first add AS2 as a protocol to your server. For details, see [Edit the file transfer protocols](#).

- To manage host keys for your server, see [Manage host keys for your SFTP-enabled server](#).
- Under **Additional details**, you can edit the following information:
 - To change the logging role, see [Edit your logging configuration](#).
 - To change the security policy, see [Edit the security policy](#).
 - To change the server host key, see [Manage host keys for your SFTP-enabled server](#).
 - To change the managed workflow for your server, see [Change the managed workflow for your server](#).
 - To edit the display banners for your server, see [Change the display banners for your server](#).
- Under Additional configuration, you can edit the following information:
 - **SetStat option:** enable this option to ignore the error that is generated when a client attempts to use SETSTAT on a file you are uploading to an Amazon S3 bucket. For additional details, see the SetStatOption documentation in the [ProtocolDetails](#) topic.
 - **TLS session resumption:** provides a mechanism to resume or share a negotiated secret key between the control and data connection for an FTPS session. For additional details, see the TlsSessionResumptionMode documentation in the [ProtocolDetails](#) topic.
 - **Passive IP:** indicates passive mode, for FTP and FTPS protocols. Enter a single IPv4 address, such as the public IP address of a firewall, router, or load balancer. For additional details, see the PassiveIp documentation in the [ProtocolDetails](#) topic.
- To start or stop your server, see [Put your server online or offline](#).
- To delete a server, see [Delete a server](#).
- To edit a user's properties, see [Managing access controls](#).

Protocols Edit	Identity provider Edit
Protocols over which clients can connect to your server's endpoint <ul style="list-style-type: none"> • SFTP 	Identity provider type Info Custom - <input type="radio"/> Lambda <input type="radio"/> Lambda function test-UserAuthenticationLambda ↗

Note

The server host key **Description** and **Date imported** values are new as of September 2022. These values were introduced to support the multiple host keys feature.

This feature required migration of any single host keys that were in use before the introduction of multiple host keys.

The **Date imported** value for a migrated server host key is set to the last modified date for the server. That is, the date that you see for your migrated host key corresponds to the date that you last modified the server in any way, before the server host key migration.

The only key that was migrated is your oldest or only server host key. Any additional keys have their actual date from when you imported them. Additionally, the migrated key has a description that makes it easy to identify it as having been migrated.

The migration occurred between September 2 and September 13. The actual migration date within this range depends on the Region of your server.

Additional details[Edit](#)**Log group**/aws/transfer/s- [redacted] [↗](#)**Logging role** [Info](#)

-

Security Policy [Info](#)

TransferSecurityPolicy-PQ-SSH-Experimental-2023-04

Domain

Amazon S3

Login display banner[View the display message](#)**Optimized directories** [Info](#)

ENABLED

SetStat option

Ignore

TLS session resumption

-

Passive IP

-

Edit the file transfer protocols

On the Amazon Transfer Family console, you can edit the file transfer protocol. The file transfer protocol connects the client to your server's endpoint.

To edit the protocols

1. On the **Server details** page, choose **Edit** next to **Protocols**.
2. On the **Edit protocols** page, select or clear the protocol check box or check boxes to add or remove the following file transfer protocols:

- Secure Shell (SSH) File Transfer Protocol (SFTP) – file transfer over SSH

For more information about SFTP, see [Create an SFTP-enabled server](#).

- File Transfer Protocol Secure (FTPS) – file transfer with TLS encryption

For more information about FTP, see [Create an FTPS-enabled server](#).

- File Transfer Protocol (FTP) – unencrypted file transfer

For more information about FTPS, see [Create an FTP-enabled server](#).

Note

If you have an existing server enabled only for SFTP, and you want to add FTPS and FTP, you must ensure that you have the right identity provider and endpoint type settings that are compatible with FTPS and FTP.

Edit protocols

Select the protocols you want to enable [Info](#)

Choose one or more file transfer protocols over which clients can connect to your server's endpoint

- SFTP (SSH File Transfer Protocol) - file transfer over Secure Shell
- AS2 (Applicability Statement 2) - messaging protocol for exchanging business-to-business data [Info](#)
- FTPS (File Transfer Protocol Secure) - file transfer protocol with TLS encryption
- FTP (File Transfer Protocol) - unencrypted file transfer protocol

[Cancel](#)

[Save](#)

If you select **FTPS**, you must choose a certificate stored in Amazon Certificate Manager (ACM) which will be used to identify your server when clients connect to it over FTPS.


To request a new public certificate, see [Request a public certificate](#) in the *Amazon Certificate Manager User Guide*.

To import an existing certificate into ACM, see [Importing certificates into ACM](#) in the *Amazon Certificate Manager User Guide*.

To request a private certificate to use FTPS through private IP addresses, see [Requesting a private certificate](#) in the *Amazon Certificate Manager User Guide*.

Certificates with the following cryptographic algorithms and key sizes are supported:

- 2048-bit RSA (RSA_2048)
- 4096-bit RSA (RSA_4096)
- Elliptic Prime Curve 256 bit (EC_prime256v1)
- Elliptic Prime Curve 384 bit (EC_secp384r1)
- Elliptic Prime Curve 521 bit (EC_secp521r1)

 **Note**

The certificate must be a valid SSL/TLS X.509 version 3 certificate with FQDN or IP address specified and contain information about the issuer.

3. Choose **Save**. You are returned to the **Server details** page.

Edit custom identity provider parameters

On the Amazon Transfer Family console, for custom identity providers, you can change some of the settings, depending on whether you are using a Lambda function or an API Gateway. In either case, if your server uses the SFTP protocol, you can edit your authentication method.

- If you are using a Lambda as your identity provider, you can change the underlying Lambda function.

Transfer Family > Servers > s- [redacted] > Edit identity provider

Edit identity provider

Identity Provider for SFTP, FTPS, or FTP

Identity provider type
An identity provider manages user access for authentication and authorization

Service managed
Create and manage users within the service

Directory
Service **Info**
Enable users in [redacted] Managed AD or use your own self-managed AD in your on-premises environment or in [redacted]

Custom Identity Provider **Info**
Manage users by integrating an identity provider of your choice

Use [redacted] **Lambda** to connect your identity provider **Info**
Invoke an [redacted] Lambda function to call your identity provider's API for user authentication and authorization

Use **Amazon API Gateway** to connect your identity provider **Info**
Use a RESTful API method to call your identity provider's API for user authentication and authorization

Lambda function

▼

G

Authentication methods
Choose which authentication methods are required for users to connect to your server

Password OR public key

Password ONLY

Public Key ONLY

Password AND public key

i Either a valid password or valid private key will be required during user authentication

Cancel Save

- If you are using an API Gateway as your identity provider, you can update the Gateway URL or the invocation role, or both.

Transfer Family > Servers > s-[redacted] > Edit identity provider

Edit identity provider

Identity Provider for SFTP, FTPS, or FTP

Identity provider type
An identity provider manages user access for authentication and authorization

Service managed
Create and manage users within the service

[redacted] Directory Service **Info**
Enable users in [redacted] Managed AD or use your own self-managed AD in your on-premises environment or in [redacted]

Custom Identity Provider **Info**
Manage users by integrating an identity provider of your choice

Use [redacted] Lambda to connect your identity provider **Info**
Invoke an [redacted] Lambda function to call your identity provider's API for user authentication and authorization

Use Amazon API Gateway to connect your identity provider **Info**
Use a RESTful API method to call your identity provider's API for user authentication and authorization

Provide an Amazon API Gateway URL

Invocation role
IAM role for the service to invoke your Amazon API Gateway URL

Authentication methods
Choose which authentication methods are required for users to connect to your server

Password OR public key

Password ONLY

Public Key ONLY

Password AND public key

i Either a valid password or valid private key will be required during user authentication

Edit the server endpoint

On the Amazon Transfer Family console, you can modify the server endpoint type and custom hostname. Additionally, for VPC endpoints, you can edit the availability zone information.

To edit the server endpoint details

1. On the **Server details** page, choose **Edit** next to **Endpoint details**.
2. Before you can edit the **Endpoint type**, you must first stop the server. Then, on the **Edit endpoint configuration** page, for **Endpoint type**, you can choose either of the following values:
 - **Public** – This option makes your server accessible over the internet.
 - **VPC** – This option makes your server accessible in your virtual private cloud (VPC). For information about VPC, see [Create a server in a virtual private cloud](#).
3. For **Custom hostname**, choose one of the following:
 - **None** – If you don't want to use a custom domain, choose **None**.

You get a server hostname provided by Amazon Transfer Family. The server hostname takes the form `serverId.server.transfer.regionId.amazonaws.com`.

- **Amazon Route 53 DNS alias** – To use a DNS alias automatically created for you in Route 53, choose this option.
- **Other DNS** – To use a hostname that you already own in an external DNS service choose **Other DNS**.

Choosing **Amazon Route 53 DNS alias** or **Other DNS** specifies the name resolution method to associate with your server's endpoint.

For example, your custom domain might be `sftp.inbox.example.com`. A custom hostname uses a DNS name that you provide and that a DNS service can resolve. You can use Route 53 as your DNS resolver, or use your own DNS service provider. To learn how Amazon Transfer Family uses Route 53 to route traffic from your custom domain to the server endpoint, see [Working with custom hostnames](#).

Endpoint configuration [Info](#)

Endpoint type
Select whether the endpoint will be publicly accessible or hosted inside your VPC

Publicly accessible
Accessible over the internet

VPC hosted [Info](#)
Access controlled using Security Groups

Access [Info](#)

Internal

Internet Facing

VPC
Select a VPC ID

[Refresh](#) [Create a VPC](#) [External Link](#)

FIPS Enabled
Select whether the endpoint should comply with Federal Information Processing Standards (FIPS)

FIPS Enabled endpoint

[Cancel](#) [Save](#)

- For VPC endpoints, you can change the information in the **Availability Zones** pane.
- Choose **Save**. You are returned to the **Server details** page.

Edit your logging configuration

On the Amazon Transfer Family console, you can change your logging configuration.

Note

If Transfer Family created a CloudWatch logging IAM role for you when you created a server, the IAM role is called `AWSTransferLoggingAccess`. You can use it for all your Transfer Family servers.

To edit your logging configuration

- On the **Server details** page, choose **Edit** next to **Additional details**.
- Based on your configuration, choose between a logging role, structured JSON logging, or both. For more information, see [Updating logging for a server](#).

Edit the security policy

This procedure explains how to change a Transfer Family server's security policy by using the Amazon Transfer Family console or Amazon CLI.

Note

If your endpoint is FIPS-enabled, you can't change the FIPS security policy to a non-FIPS security policy.

Console

To edit the security policy by using the console

1. On the **Server details** page, choose **Edit** next to **Additional details**.
2. In the **Cryptographic algorithm options** section, choose a security policy that contains the cryptographic algorithms enabled for use by your server.

For more information about security policies, see [Security policies for Amazon Transfer Family servers](#).

3. Choose **Save**.

You are returned to the **Server details** page where you can see the updated security policy.

Amazon CLI

To edit the security policy by using the CLI

1. Run the following command to view the current security policy that is attached to your server.

```
aws transfer describe-server --server-id your-server-id
```


This `describe-server` command returns all of the details for your server, including the following line:

```
"SecurityPolicyName": "TransferSecurityPolicy-2018-11"
```

In this case, the security policy for the server is `TransferSecurityPolicy-2018-11`.

2. Make sure to provide the exact name of the security policy to the command.
For example, run the following command to update the server to `TransferSecurityPolicy-2023-05`.

```
aws transfer update-server --server-id your-server-id --security-policy-name  
"TransferSecurityPolicy-2023-05"
```

 **Note**

The names of the available security policies are listed in [Security policies for Amazon Transfer Family servers](#).

If successful, the command returns the following code, and updates your server's security policy.


```
{  
  "ServerId": "your-server-id"  
}
```

Change the managed workflow for your server

On the Amazon Transfer Family console, you can change the managed workflow associated with the server.

To change the managed workflow


1. On the **Server details** page, choose **Edit** next to **Additional details**.
2. On the **Edit additional details** page, in the **Managed workflows** section, select a workflow to be run on all uploads.

 **Note**

If you do not already have a workflow, choose **Create a new workflow** to create one.

- a. Select the workflow ID to use.

- b. Choose an execution role. This is the role that Transfer Family assumes when executing the workflow's steps. For more information, see [IAM policies for workflows](#). Choose **Save**.

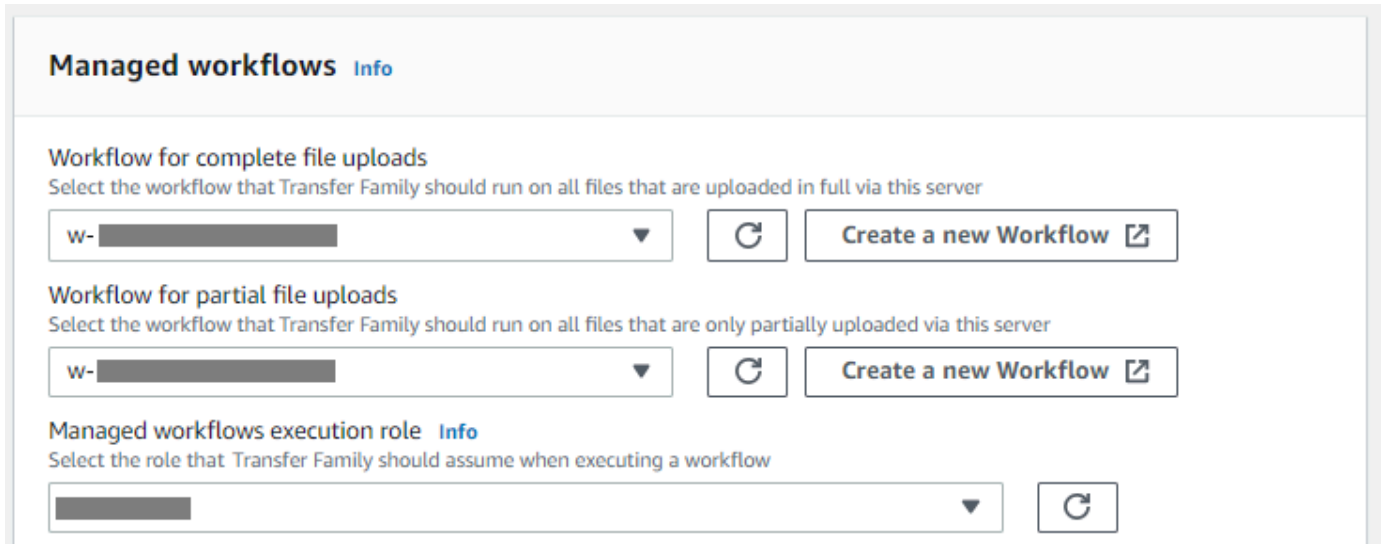

The screenshot displays the 'Managed workflows' section of the Amazon Transfer Family console. It features three main configuration areas:

- Workflow for complete file uploads:** Includes a dropdown menu with a 'w-' prefix, a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Workflow for partial file uploads:** Includes a dropdown menu with a 'w-' prefix, a refresh button, and a 'Create a new Workflow' button with an external link icon.
- Managed workflows execution role:** Includes a dropdown menu and a refresh button.

3. Choose **Save**. You are returned to the **Server details** page.

Change the display banners for your server

On the Amazon Transfer Family console, you can change the display banners associated with the server.

To change the display banners

1. On the **Server details** page, choose **Edit** next to **Additional details**.
2. On the **Edit additional details** page, in the **Display banners** section, enter text for the available display banners.
3. Choose **Save**. You are returned to the **Server details** page.

Put your server online or offline


On the Amazon Transfer Family console, you can bring your server online or take it offline.

To bring your server online

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.

2. In the navigation pane, choose **Servers**.
3. Select the check box of the server that is offline.
4. For **Actions**, choose **Start**.

It can take a couple of minutes for a server to switch from offline to online.

 **Note**

When you stop a server to take it offline, currently you are still accruing service charges for that server. To eliminate additional server-based charges, delete that server.

To take your server offline

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the navigation pane, choose **Servers**.
3. Select the check box of the server that is online.
4. For **Actions**, choose **Stop**.

While a server is starting up or shutting down, servers aren't available for file operations. The console doesn't show the starting and stopping states.

If you find the error condition `START_FAILED` or `STOP_FAILED`, contact Amazon Web Services Support to help resolve your issues.

Manage host keys for your SFTP-enabled server

The server host key is a private key used by the Transfer Family server to provide a unique identity to the caller, and to guarantee that it is the correct server. That guarantee is enforced by the presence of the correct public key in the caller's `known_hosts` file. (The `known_hosts` file is a standard feature used by most SSH clients to store the public keys for the servers that you've connected to.) You can retrieve the public key that corresponds to your server host key by running `ssh-keyscan` for your server.

⚠ Important

If you aren't planning to migrate existing users from an existing SFTP-enabled server to a new SFTP-enabled server, ignore this section.

Accidentally changing a server's host key can be disruptive. Depending on how your SFTP client is configured, it can fail immediately, with the message that no trusted host key exists, or present threatening prompts. If there are scripts for automating connections, they most likely would fail as well.

By default, Amazon Transfer Family provides a host key for your SFTP-enabled server. You can replace the default host key with a host key from another server. Do so only if you plan to move existing users from an existing SFTP-enabled server to your new SFTP-enabled server.

To prevent your users from being prompted to verify the authenticity of your SFTP-enabled server again, import the host key for your on-premises server to the SFTP-enabled server. Doing this also prevents your users from getting a warning about a potential man-in-the-middle attack.

You can also rotate host keys periodically, as an additional security measure.

ℹ Note

Although the Transfer Family console allows you to specify and add server host keys for all servers, these keys are only useful for servers that use the SFTP protocol.

Topics

- [Add an additional server host key](#)
- [Delete a server host key](#)
- [Rotate the server host keys](#)
- [Additional server host key information](#)

Add an additional server host key

On the Amazon Transfer Family console, you can add additional server host keys. Adding additional host keys of differing formats can be useful for identifying a server when clients connect to it, as

well as improving your security profile. For example, if your original key is an RSA key, you could add an additional ECDSA key.

Note

The SFTP client will connect using the oldest key in the configuration that matches the key's algorithm. The oldest key for each key type (RSA, ECDSA, or ED25519) is the active key for the server for that type.

Security note when a Transfer Family server has multiple types of host keys

If a server has multiple types of host keys, the SFTP client can assign a preference by type. So, when there exist RSA, ECDSA, and ED25519 host keys for the server, the choice is driven by the preference by type.

Modern SFTP clients prefer ECDSA and ED25519 host keys when they exist. This becomes important if you want to add an ECDSA or ED25519 key when the server previously only had RSA keys. The addition of the new ECDSA or ED25519 key would potentially manifest as a security warning for a client.

To the client, the key will appear as having changed, when in fact it was not changed: the new key was added in addition to the existing RSA key. Keep this in mind if you decide to add new types of server host keys.

To add an additional server host key

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. In the left navigation pane, choose **Servers**, and then choose a server that uses the SFTP protocol.
3. On the server details page, scroll down to the **Server host keys** section.

Server host keys (2)							Actions	Add host key
<input type="text" value="Find resources"/>							< 1 >	
<input type="checkbox"/>	Name	Host key ID	Fingerprint	Description	Key type	Date imported		
<input type="checkbox"/>	Default host key	hostkey- [REDACTED]	SHA256: [REDACTED]	Default	ssh-rsa	2023-06-30		
<input type="checkbox"/>	ecdsa-521	hostkey- [REDACTED]	SHA256: [REDACTED]	ECDSA host key	ecdsa-sha2-nistp521	2024-06-13		

4. Choose **Add host key**.

The **Add server host key** page displays.

- In the **Server Host Key** section, enter an RSA, ECDSA, or ED25519 private key that is used to identify your server when clients connect to it over the SFTP-enabled server.

Note

When you create a server host key, make sure to specify `-N ""` (no passphrase). See [Creating SSH keys on macOS, Linux, or Unix](#) for details on how to generate key pairs.

- (Optional) Add a description to differentiate among multiple server host keys. You can also add tags for your key.
- Choose **Add key**. You are returned to the **Server details** page.

To add a host key by using the Amazon Command Line Interface (Amazon CLI), use the [ImportHostKey](#) API operation and provide the new host key. If you create a new SFTP-enabled server, you provide your host key as a parameter in the [CreateServer](#) API operation. You can also use the Amazon CLI to update the description for an existing host key.

The following example `import-host-key` Amazon CLI command imports a host key for the specified SFTP-enabled server.

```
aws transfer import-host-key --description key-description --server-id your-server-id
--host-key-body file://my-host-key
```

Delete a server host key

On the Amazon Transfer Family console, you can delete a server host key.

To delete a server host key

- Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
- In the left navigation pane, choose **Servers**, and then choose a server that uses the SFTP protocol.
- On the server details page, scroll down to the **Server host keys** section.

Server host keys (2)							Actions	Add host key
Name	Host key ID	Fingerprint	Description	Key type	Date imported			
Default host key	hostkey-██████████	SHA256:██████████	Default	ssh-rsa	2023-06-30			
ecdsa-521	hostkey-██████████	SHA256:██████████	ECDSA host key	ecdsa-sha2-nistp521	2024-06-13			

4. In the **Server Host Keys** section, select a key, and then under **Actions**, choose **Delete**.
5. In the confirmation dialog box that appears, enter the word **delete**, and then choose **Delete** to confirm that you want to delete the host key.

The host key is deleted from the **Servers** page.

To delete the host key by using the Amazon CLI, use the [DeleteHostKey](#) API operation and provide the server ID and host key ID.

The following example `delete-host-key` Amazon CLI command deletes a host key for the specified SFTP-enabled server.

```
aws transfer delete-host-key --server-id your-server-id --host-key-id your-host-key-id
```

Rotate the server host keys

Periodically, you can rotate your server host key. This topic describes how the server chooses which key to apply, and the procedure for rotating these keys.

How the client chooses a server host key

The way that Transfer Family chooses which server key to apply depends on conditions for the SFTP client, as explained here. The assumption is that there is one older key and one newer key.

- An SFTP client has no prior public host key for the server. The first time the client connects to the server, either of the following occurs:
 - The client fails the connection, if it is configured to do so.
 - Or, the client chooses the first key that matches the possible available algorithms and asks the user if that key can be trusted. If so, the client auto-updates the `known_hosts` file (or whatever local configuration file or resource the client uses to record trust decisions) and enters that key.
- An SFTP client has an older key in its `known_hosts` file. The client prefers to use this key, even if a newer key exists, either for this key's algorithm or another algorithm. This is because the client has a higher level of trust for the key that is in its `known_hosts` file.
- An SFTP client has the new key (in any of the available algorithms) in its `known_hosts` keys file. The client ignores older keys because they are not trusted and uses the new key.

- An SFTP client has both keys in its `known_hosts` file. The client chooses the first key by index that matches the list of available keys offered by the server.

Transfer Family prefers that the SFTP client has all of the keys in its `known_hosts` file, since this allows the most flexibility when connecting to a Transfer Family server. Key rotation is based on the fact that multiple entries can exist in the `known_hosts` file for the same Transfer Family server.

Rotate the server host key procedure

As an example, assume that you have added the following set of server host keys to your Transfer Family server.

Server host keys

Host key type	Date added to the server
RSA	April 1, 2020
ECDSA	February 1, 2020
ED25519	December 1, 2019
RSA	October 1, 2019
ECDSA	June 1, 2019
ED25519	March 1, 2019

To rotate the server host key

1. Add a new server host key. This procedure is described in [Add an additional server host key](#).
2. Delete one or more of the host keys of the same type that you had added previously. This procedure is described in [Delete a server host key](#).
3. All keys are visible, and can be active, subject to the behavior described previously in [How the client chooses a server host key](#).

Additional server host key information

You can select a host key to display details for that key.

Transfer Family > Servers > s-3fe215d89f074ed2a > Hostkey: hostkey-a6fed60bcb704ea9b

hostkey-a6fed60bcb704ea9b Delete

Host key configuration Edit

Name	ecdsa-521	Key type	ecdsa-sha2-nistp521
Fingerprint	SHA256: [REDACTED]	Date imported	Thu, 13 Jun 2024 17:08:59 GMT
Description	ECDSA host key	Amazon Resource Name (ARN)	arn:aws:transfer:us-east-1:[REDACTED]:host-key/[REDACTED]/hostkey-a[REDACTED]

You can delete a host key, or edit its description from the **Actions** menu on the Server details screen. Select the host key, then choose the appropriate action from the menu.

Server host keys (2)

Find resources

Actions
Add host key

Name	Host key ID	Fingerprint	Description	Key type	Date imported
<input type="checkbox"/> Default host key	hostkey-[REDACTED]	SHA256:[REDACTED]	Default	ssh-rsa	2023-06-30
<input checked="" type="checkbox"/> ecdsa-521	hostkey-[REDACTED]	SHA256:[REDACTED]	ECDSA host key	ecdsa-sha2-nistp521	2024-06-13

Monitoring usage in the console

You can get information about your server's metrics on its **Server details** page. This provides you with a single place to monitor your file-transfers workloads. You can track how many files you have exchanged with your partners and closely track their usage using a centralized dashboard. For details, see [View SFTP, FTPS, and FTP server details](#). The following table describes the metrics available for Transfer Family.

Namespace	Metric	Description
AWS/Transfer	BytesIn	The total number of bytes transferred into the server.
		Reporting criteria: <ul style="list-style-type: none"> For SFTP/FTP/FTPS: emitted every 5 minutes while a connection is established to the Transfer Family

Namespace	Metric	Description
		<p>server. If no files or bytes are transferred in the period, "0" is emitted.</p> <ul style="list-style-type: none"> For AS2: when the customer receives a message in their AS2 server and emitted as soon as the inbound message has finished processing <p>Units: Count</p> <p>Period: 5 minutes</p>
	BytesOut	<p>The total number of bytes transferred out of the server.</p> <p>Reporting criteria:</p> <ul style="list-style-type: none"> For SFTP/FTP/FTPS: emitted every 5 minutes while a connection is established to the Transfer Family server. If no files or bytes are transferred in the period, "0" is emitted. For AS2: when the customer calls <code>StartFileTransfer</code> from their AS2 connector and emitted as soon as the outbound message has finished processing. <p>Units: Count</p> <p>Period: 5 minutes</p>


Namespace	Metric	Description
	FilesIn	<p>The total number of files transferred into the server.</p> <p>For servers using the AS2 protocol, this metric represents the number of messages received.</p> <p>Reporting criteria:</p> <ul style="list-style-type: none"> • For SFTP/FTP/FTPS: emitted every 5 minutes while a connection is established to the Transfer Family server. If no files or bytes are transferred in the period, "0" is emitted. • For AS2: when the customer receives a message in their AS2 server and emitted as soon as the inbound message has finished processing. <p>Units: Count</p> <p>Period: 5 minutes</p>
	FilesOut	<p>The total number of files transferred out of the server.</p> <p>Reporting criteria:</p> <ul style="list-style-type: none"> • For SFTP/FTP/FTPS: emitted every 5 minutes while a connection is established to the Transfer Family server. If no files or bytes are transferred in the period, "0" is emitted. • For AS2: when the customer calls <code>StartFileTransfer</code> from their AS2 connector and emitted as soon as the outbound message has finished processing. <p>Units: Count</p> <p>Period: 5 minutes</p>

Namespace	Metric	Description
	InboundMessage	<p>The total number of AS2 messages successfully received from a trading partner.</p> <p>Reporting criteria: When the customer receives a message in their AS2 server and emitted as soon as the inbound message has finished processing successfully</p> <p>Units: Count</p> <p>Period: 5 minutes</p>
	InboundFailedMessage	<p>The total number of AS2 messages that were unsuccessfully received from a trading partner. That is, a trading partner sent a message, but the Transfer Family server was not able to successfully process it.</p> <p>Reporting criteria: When the customer receives a message in their AS2 server and emitted as soon as the inbound message has finished processing unsuccessfully</p> <p>Units: Count</p> <p>Period: 5 minutes</p>
	OnUploadExecutionsStarted	<p>The total number of workflow executions started on the server.</p> <p>Reporting criteria: Triggered every time an execution starts</p> <p>Units: Count</p> <p>Period: 1 minute</p>


Namespace	Metric	Description
	OnUploadExecutionsSuccess	<p>The total number of successful workflow executions on the server.</p> <p>Reporting criteria: Triggered every time an execution successfully finishes</p> <p>Units: Count</p> <p>Period: 1 minute</p>
	OnUploadExecutionsFailed	<p>The total number of unsuccessful workflow executions on the server.</p> <p>Reporting criteria: Triggered every time an execution does not successfully finish</p> <p>Units: Count</p> <p>Period: 1 minute</p>
	OutboundMessage	<p>The total number of AS2 messages successfully sent to a trading partner.</p> <p>Reporting criteria: When the customer calls <code>StartFileTransfer</code> from their AS2 connector and emitted as soon as the outbound message has finished processing successfully</p> <p>Units: Count</p> <p>Period: 5 minutes</p>

Namespace	Metric	Description
	OutboundFailedMessage	<p>The total number of AS2 messages that were unsuccessfully sent to a trading partner.</p> <p>Reporting criteria: When the customer calls <code>StartFileTransfer</code> from their AS2 connector and emitted as soon as the outbound message has finished processing unsuccessfully</p> <p>Units: Count</p> <p>Period: 5 minutes</p>

The **Monitoring** section contains four, individual graphs. These graphs show the bytes in, bytes out, files in, and files out.

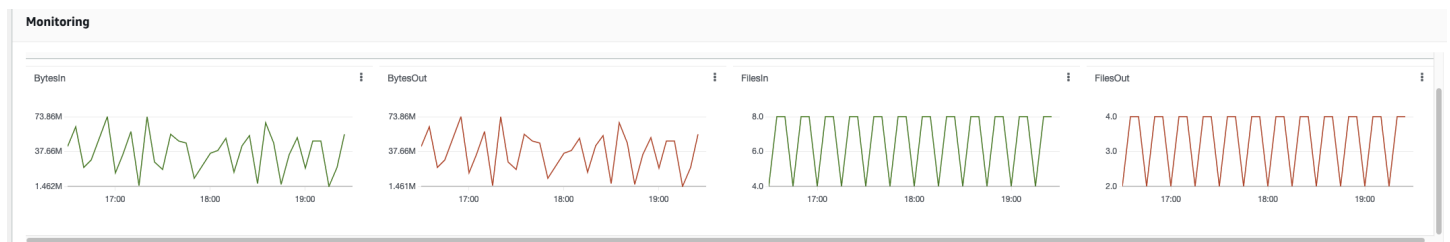

For servers that have the AS2 protocol enabled, there is an **AS2 Monitoring** section below the **Monitoring** information. This section contains details for the number of inbound messages, both successful and failed.

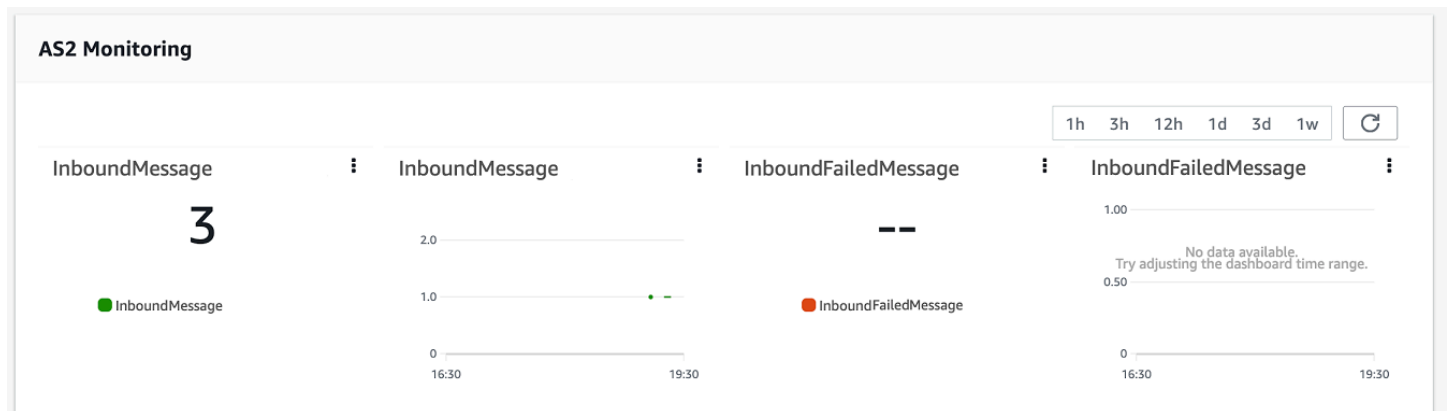

To open the selected graph in its own window, choose the expand icon



You can also click a graph's vertical ellipsis icon



)

to open a dropdown menu with the following items:

- **Enlarge** – Opens the selected graph in its own window.
- **Refresh** – Reloads the graph with the most recent data.
- **View in metrics** – Opens the corresponding metrics details in Amazon CloudWatch.
- **View logs** – Opens the corresponding log group in CloudWatch.

Managing access controls

You can control a user's access to Amazon Transfer Family resources by using an Amazon Identity and Access Management (IAM) policy. An IAM policy is a statement, typically in JSON format, that allows a certain level of access to a resource. You use an IAM policy to define what file operations that you want to allow your users to perform and not perform. You can also use an IAM policy to define what Amazon S3 bucket or buckets that you want to give your users access to. To specify these policies for users, you create an IAM role for Amazon Transfer Family that has the IAM policy and trust relationship associated with it.

Each user is assigned an IAM role. The type of IAM role that Amazon Transfer Family uses is called a *service role*. When a user logs in to your server, Amazon Transfer Family assumes the IAM role mapped to the user. To learn about creating an IAM role that provides a user access to an Amazon S3 bucket, see [Creating a role to delegate permissions to an Amazon service](#) in the *IAM User Guide*.

You can grant write-only access to Amazon S3 objects by using certain permissions within an IAM policy. For details, see [Grant ability to only write and list files](#).

The Amazon Storage Blog contains a post detailing how to set up least privilege access. For details, see [Implementing least privilege access in an Amazon Transfer Family workflow](#).

Note

If your Amazon S3 bucket is encrypted using Amazon Key Management Service (Amazon KMS), you must specify additional permissions in your policy. For details, see [Data protection and encryption](#). Additionally, you can see more information about [session policies](#) in the *IAM User Guide*.

Topics

- [Allowing read and write access to an Amazon S3 bucket](#)
- [Creating a session policy for an Amazon S3 bucket](#)

Allowing read and write access to an Amazon S3 bucket

This section describes how to create an IAM policy that allows read and write access to a specific Amazon S3 bucket. Assigning an IAM role that has this IAM policy to your user gives that user read/write access to the specified Amazon S3 bucket.

The following policy provides programmatic read, write, and tagging access to an Amazon S3 bucket. The `GetObjectACL` and `PutObjectACL` statements are only required if you need to enable Cross Account Access. That is, your Transfer Family server needs to access a bucket in a different account.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "ReadWriteS3",
      "Action": [
        "s3:ListBucket"
      ],
      "Effect": "Allow",
      "Resource": ["arn:aws-cn:s3::amzn-s3-demo-bucket"]
    },
    {
      "Effect": "Allow",
      "Action": [
        "s3:PutObject",
        "s3:GetObject",
        "s3:GetObjectTagging",
        "s3:DeleteObject",
        "s3:DeleteObjectVersion",
        "s3:GetObjectVersion",
        "s3:GetObjectVersionTagging",
        "s3:GetObjectACL",
        "s3:PutObjectACL"
      ],
      "Resource": ["arn:aws-cn:s3::amzn-s3-demo-bucket/*"]
    }
  ]
}
```

The `ListBucket` action requires permission to the bucket itself. The `PUT`, `GET`, and `DELETE` actions require object permissions. Because these are different resources, they are specified using different Amazon Resource Names (ARNs).

To further restrict your users' access to only the home prefix of the specified Amazon S3 bucket, see [Creating a session policy for an Amazon S3 bucket](#).

Creating a session policy for an Amazon S3 bucket

A *session policy* is an Amazon Identity and Access Management (IAM) policy that restricts users to certain portions of an Amazon S3 bucket. It does so by evaluating access in real time.

Note

Session policies are only used with Amazon S3. For Amazon EFS, you use POSIX file permissions to limit access.

You can use a session policy when you need to give the same access to a group of users to a particular portion of your Amazon S3 bucket. For example, a group of users might need access to only the home directory. That group of users share the same IAM role.

Note

The maximum length of a session policy is 2048 characters. For more details, see the [Policy request parameter](#) for the `CreateUser` action in the *API reference*.

To create a session policy, use the following policy variables in your IAM policy:

- `${transfer:HomeBucket}`
- `${transfer:HomeDirectory}`
- `${transfer:HomeFolder}`
- `${transfer:UserName}`

⚠ Important

You can't use the preceding variables in Managed Policies. Nor can you use them as policy variables in an IAM role definition. You create these variables in an IAM policy and supply them directly when setting up your user. Also, you can't use the `${aws:Username}` variable in this session policy. This variable refers to an IAM user name and not the username required by Amazon Transfer Family.

Example session policy

The following code shows an example session policy.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowListingOfUserFolder",
      "Action": [
        "s3:ListBucket"
      ],
      "Effect": "Allow",
      "Resource": [
        "arn:aws-cn:s3:::${transfer:HomeBucket}"
      ],
      "Condition": {
        "StringLike": {
          "s3:prefix": [
            "${transfer:HomeFolder}/*",
            "${transfer:HomeFolder}"
          ]
        }
      }
    },
    {
      "Sid": "HomeDirObjectAccess",
      "Effect": "Allow",
      "Action": [
        "s3:PutObject",
        "s3:GetObject",
        "s3:DeleteObjectVersion",
        "s3:DeleteObject",

```

```

        "s3:GetObjectVersion",
        "s3:GetObjectACL",
        "s3:PutObjectACL"
    ],
    "Resource": "arn:aws-cn:s3:::${transfer:HomeDirectory}/*"
}
]
}
```

Note

The preceding policy example assumes that users have their home directories set to include a trailing slash, to signify that it is a directory. If, on the other hand, you set a user's `HomeDirectory` without the trailing slash, then you should include it as part of your policy.

In the previous example policy, note the use of the `transfer:HomeFolder`, `transfer:HomeBucket`, and `transfer:HomeDirectory` policy parameters. These parameters are set for the `HomeDirectory` that is configured for the user, as described in [HomeDirectory](#) and [Implementing your API Gateway method](#). These parameters have the following definitions:

- The `transfer:HomeBucket` parameter is replaced with the first component of `HomeDirectory`.
- The `transfer:HomeFolder` parameter is replaced with the remaining portions of the `HomeDirectory` parameter.
- The `transfer:HomeDirectory` parameter has the leading forward slash (/) removed so that it can be used as part of an S3 Amazon Resource Name (ARN) in a Resource statement.

Note

If you are using logical directories—that is, the user's `homeDirectoryType` is `LOGICAL`—these policy parameters (`HomeBucket`, `HomeDirectory`, and `HomeFolder`) are not supported.

For example, assume that the `HomeDirectory` parameter that is configured for the Transfer Family user is `/home/bob/amazon/stuff/`.

- `transfer:HomeBucket` is set to `/home`.
- `transfer:HomeFolder` is set to `/bob/amazon/stuff/`.
- `transfer:HomeDirectory` becomes `home/bob/amazon/stuff/`.

The first "Sid" allows the user to list all directories starting from `/home/bob/amazon/stuff/`.

The second "Sid" limits the user's put and get access to that same path, `/home/bob/amazon/stuff/`.

With the preceding policy in place, when a user logs in, they can access only objects in their home directory. At connection time, Amazon Transfer Family replaces these variables with the appropriate values for the user. Doing this makes it easier to apply the same policy documents to multiple users. This approach reduces the overhead of IAM role and policy management for managing your users' access to your Amazon S3 bucket.

You can also use a session policy to customize access for each of your users based on your business requirements. For more information, see [Permissions for AssumeRole, AssumeRoleWithSAML, and AssumeRoleWithWebIdentity](#) in the *IAM User Guide*.

Note

Amazon Transfer Family stores the policy JSON, instead of the Amazon Resource Name (ARN) of the policy. So, when you change the policy in the IAM console, you need to return to Amazon Transfer Family console and update your users with the latest policy contents. You can update the user on the **Policy Info** tab in the **User configuration** section. If you are using the Amazon CLI, you can use the following command to update the policy.

```
aws transfer update-user --server-id server --user-name user --policy \  
    "$(aws iam get-policy-version --policy-arn policy --version-id version --  
    output json)"
```

Nested substitutions for session policies

Nested substitutions are not performed in Transfer Family session policies. Session policies can use nested variables, such as `${transfer:HomeDirectory}`. When the policy is processed, the outer variable (e.g., `${transfer:HomeDirectory}`) might get replaced with a value that

contains another variable (e.g., `{amzn-s3-demo-bucket:/${transfer:UserName}}`). However, the nested variable is not further substituted with the actual username (e.g., **john**doe).

This means that when creating session policies for Transfer Family, you need to account for this behavior and ensure that the policy structure and variable usage are designed accordingly. The nested variables may not be resolved as expected, and the policy might not grant the intended permissions. It's important to thoroughly test and validate the session policies to ensure they work as expected. This behavior is a key consideration when implementing access control and permissions for your Transfer Family environment.

One solution to this issue is to use the actual Amazon S3 bucket name in your session policy. So, for example, rather than specifying `${transfer:HomeDirectory}` in your session policy, use the following, where `amzn-s3-demo-bucket` is your actual bucket: `${amzn-s3-demo-bucket/transfer:UserName}`.

Amazon CloudTrail logging for Amazon Transfer Family

Amazon Transfer Family integrates with both Amazon CloudTrail and Amazon CloudWatch. CloudTrail and CloudWatch serve different but complementary purposes.

- This topic covers integration with CloudTrail, an Amazon service that creates a record of actions taken within your Amazon Web Services account. It continuously monitors and records API operations for activities like console sign-ins, Amazon Command Line Interface commands, and SDK/API operations. This allows you to keep a log of who took what action, when, and from where. CloudTrail helps with auditing, access management, and regulatory compliance by providing a history of all activity in your Amazon environment. For details, see the [Amazon CloudTrail User Guide](#).
- [Amazon CloudWatch logging for Amazon Transfer Family servers](#) covers integration with CloudWatch, a monitoring service for Amazon resources and applications. It collects metrics and logs to provide visibility into resource utilization, application performance, and overall system health. CloudWatch helps with operational tasks like troubleshooting issues, setting alarms and autoscaling. For details, see the [Amazon CloudWatch User Guide](#).

A trail is a configuration that enables delivery of events as log files to an Amazon S3 bucket that you specify. CloudTrail log files contain one or more log entries. An event represents a single request from any source and includes information about the requested action, the date and time of the action, request parameters, and so on. CloudTrail log files aren't an ordered stack trace of the public API operations, so they don't appear in any specific order.

For an ongoing record of events in your Amazon account, including events for Amazon Transfer Family, create a trail. A *trail* enables CloudTrail to deliver log files to an Amazon S3 bucket. By default, when you create a trail in the console, the trail applies to all Amazon Regions. The trail logs events from all Regions in the Amazon partition and delivers the log files to the Amazon S3 bucket that you specify. Additionally, you can configure other Amazon services to further analyze and act upon the event data collected in CloudTrail logs. For more information, see the following:

- [Overview for creating a trail](#)
- [CloudTrail supported services and integrations](#)
- [Configuring Amazon SNS notifications for CloudTrail](#)
- [Receiving CloudTrail log files from multiple regions](#) and [Receiving CloudTrail log files from multiple accounts](#)

All Amazon Transfer Family actions are logged by CloudTrail and are documented in the [Actions API reference](#). For example, calls to the `CreateServer`, `ListUsers` and `StopServer` actions generate entries in the CloudTrail log files.

Every event or log entry contains information about who generated the request. The identity information helps you determine the following:

- Whether the request was made with root or Amazon Identity and Access Management user credentials.
- Whether the request was made with temporary security credentials for a role or federated user.
- Whether the request was made by another Amazon service.

For more information, see the [CloudTrail userIdentity element](#).

If you create a trail, you can enable continuous delivery of CloudTrail events to an Amazon S3 bucket, including events for Amazon Transfer Family. If you don't configure a trail, you can still view the most recent events in the CloudTrail console in **Event history**.

Using the information collected by CloudTrail, you can determine the request that was made to Amazon Transfer Family, the IP address from which the request was made, who made the request, when it was made, and additional details.

To learn more about CloudTrail, see the [Amazon CloudTrail User Guide](#).

Topics

- [Enable Amazon CloudTrail logging](#)
- [Example log entry for creating a server](#)

Enable Amazon CloudTrail logging

You can monitor Amazon Transfer Family API operations using Amazon CloudTrail. By monitoring API operations, you can get useful security and operational information. If you have [Amazon S3 object level logging enabled](#), `RoleSessionName` is contained in the `Requester` field as `[AWS:Role Unique Identifier]/username.sessionid@server-id`. For more information about Amazon Identity and Access Management (IAM) role unique identifiers, see [Unique identifiers](#) in the *Amazon Identity and Access Management User Guide*.

⚠ Important

The maximum length of the RoleSessionName is 64 characters. If the RoleSessionName is longer, the server-id gets truncated.

Example log entry for creating a server

The following example shows a CloudTrail log entry (in JSON format) that demonstrates the CreateServer action.

```
{
  "eventVersion": "1.09",
  "userIdentity": {
    "type": "AssumedRole",
    "principalId": "AAAA4FFF5HHHHH6NNWWW:user1",
    "arn": "arn:aws:sts::123456789102:assumed-role/Admin/user1",
    "accountId": "123456789102",
    "accessKeyId": "AAAA52C2WWWWW3BB4Z",
    "sessionContext": {
      "attributes": {
        "mfaAuthenticated": "false",
        "creationDate": "2018-12-18T20:03:57Z"
      },
      "sessionIssuer": {
        "type": "Role",
        "principalId": "AAAA4FFF5HHHHH6NNWWW",
        "arn": "arn:aws:iam::123456789102:role/Admin",
        "accountId": "123456789102",
        "userName": "Admin"
      }
    }
  },
  "eventTime": "2024-02-05T19:18:53Z",
  "eventSource": "transfer.amazonaws.com",
  "eventName": "CreateServer",
  "awsRegion": "us-east-1",
  "sourceIPAddress": "11.22.1.2",
  "userAgent": "Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/121.0.0.0 Safari/537.36",
  "requestParameters": {
    "domain": "S3",
```

```
    "hostKey": "HIDDEN_DUE_TO_SECURITY_REASONS",
    "protocols": [
      "SFTP"
    ],
    "protocolDetails": {
      "passiveIp": "AUTO",
      "tlsSessionResumptionMode": "ENFORCED",
      "setStatOption": "DEFAULT"
    },
    "securityPolicyName": "TransferSecurityPolicy-2020-06",
    "s3StorageOptions": {
      "directoryListingOptimization": "ENABLED"
    }
  },
  "responseElements": {
    "serverId": "s-1234abcd5678efghi"
  },
  "requestID": "6fe7e9b1-72fc-45b0-a7f9-5840268aeadf",
  "eventID": "4781364f-7c1e-464e-9598-52d06aa9e63a",
  "readOnly": false,
  "eventType": "AwsApiCall",
  "managementEvent": true,
  "recipientAccountId": "123456789102",
  "eventCategory": "Management",
  "tlsDetails": {
    "tlsVersion": "TLSv1.3",
    "cipherSuite": "TLS_AES_128_GCM_SHA256",
    "clientProvidedHostHeader": "transfer.us-east-1.amazonaws.com"
  },
  "sessionCredentialFromConsole": "true"
}
```

Amazon CloudWatch logging for Amazon Transfer Family servers

Amazon CloudWatch is a powerful monitoring and observability service that provides comprehensive visibility into your Amazon resources, including Amazon Transfer Family.

- **Real-time monitoring:** CloudWatch monitors Transfer Family resources and applications in real-time, allowing you to track and analyze their performance.
- **Metrics collection:** CloudWatch collects and tracks various metrics for your resources and applications, which are variables you can measure and use for analysis.
- **CloudWatch home page:** The CloudWatch home page automatically displays metrics about Transfer Family and other Amazon services you use, providing a centralized view of your monitoring data.
- **Custom dashboards:** You can create custom dashboards in CloudWatch to display metrics specific to your custom applications and the resources you choose to monitor.
- **Alarms and notifications:** CloudWatch allows you to create alarms that monitor your metrics and trigger notifications or automated actions when certain thresholds are breached. This can be useful for monitoring file transfer activity in your Transfer Family servers and scaling resources accordingly.
- **Cost optimization:** You can use the data collected by CloudWatch to identify under-utilized resources and take actions, such as stopping or deleting instances, to optimize your costs.

Overall, the comprehensive monitoring capabilities in CloudWatch make it a valuable tool for managing and optimizing your Transfer Family infrastructure and the applications running on it.

Types of CloudWatch logging for Transfer Family

Transfer Family provides two ways to log events to CloudWatch:

- JSON structured logging
- Logging via a logging role

For Transfer Family servers, you can choose the logging mechanism that you prefer. For connectors and workflows, only logging roles are supported.

JSON structured logging

For logging server events, we recommend using JSON structured logging. This provides a more comprehensive logging format that enables CloudWatch log querying. For this type of logging, the IAM policy for the user that creates the server (or edits the server's logging configuration) must contain the following permissions:

- `logs:CreateLogDelivery`
- `logs>DeleteLogDelivery`
- `logs:DescribeLogGroups`
- `logs:DescribeResourcePolicies`
- `logs:GetLogDelivery`
- `logs>ListLogDeliveries`
- `logs:PutResourcePolicy`
- `logs:UpdateLogDelivery`

The following is an example policy.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "logs:CreateLogDelivery",
        "logs:GetLogDelivery",
        "logs:UpdateLogDelivery",
        "logs>DeleteLogDelivery",
        "logs>ListLogDeliveries",
        "logs:PutResourcePolicy",
        "logs:DescribeResourcePolicies",
        "logs:DescribeLogGroups"
      ],
      "Resource": "*"
    }
  ]
}
```


For details on setting up JSON structured logging, see [Creating, updating, and viewing logging for servers](#).

Logging role

To log events for a managed workflow that is attached to a server, as well as for connectors, you need to specify a logging role. To set access, you create a resource-based IAM policy and an IAM role that provides that access information. The following is an example policy for an Amazon Web Services account that can log server events.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "logs:CreateLogStream",
        "logs:DescribeLogStreams",
        "logs:CreateLogGroup",
        "logs:PutLogEvents"
      ],
      "Resource": "arn:aws-cn:logs:*:*:log-group:/aws/transfer/*"
    }
  ]
}
```

For details on configuring a logging role to log workflow events see [Managing logging for workflows](#).

Creating, updating, and viewing logging for servers

For all Amazon Transfer Family servers, we provide structured logging. We recommend that you use structured logging for all new and existing Transfer Family servers. Benefits of using structured logging include the following:

- Receive logs in a structured JSON format.
- Query your logs with Amazon CloudWatch Logs Insights, which automatically discovers JSON formatted fields.

- Share log groups across Amazon Transfer Family resources allows you to combine log streams from multiple servers into a single log group, making it easier to manage your monitoring configurations and log retention settings.
- Create aggregated metrics and visualizations that can be added to CloudWatch dashboards.
- Track usage and performance data by using log groups to create consolidated log metrics, visualizations, and dashboards.

To enable logging for workflows that are attached to servers, you must use a logging role.

Note

When you add a logging role, the logging group is always `/aws/transfer/your-serverID`, and can't be changed. This means, that unless you are sending your structured server logs to the same group, you will be logging to two separate logging groups.

If you know that you are going to associate a workflow with your server, and thus need to add a logging role, you can set up structured logging to log to the default log group of `/aws/transfer/your-serverID`.

To modify your logging group, see [StructuredLogDestinations](#) in the *Amazon Transfer Family API Reference*.

If you create a new server by using the Transfer Family console, logging is enabled by default. After you create the server, you can use the `UpdateServer` API operation to change your logging configuration. For details, see [StructuredLogDestinations](#).

Currently, for workflows, if you want logging enabled, you must specify a logging role:

- If you associate a workflow with a server, using either the `CreateServer` or `UpdateServer` API operation, the system does not automatically create a logging role. If you want to log your workflow events, you need to explicitly attach a logging role to the server.
- If you create a server using the Transfer Family console and you attach a workflow, logs are sent to a log group that contains the server ID in the name. The format is `/aws/transfer/server-id`, for example, `/aws/transfer/s-1111aaaa2222bbbb3`. The server logs can be sent to this same log group or a different one.

Logging considerations for creating and editing servers in the console

- New servers created through the console only support structured JSON logging, unless a workflow is attached to the server.
- *No logging* is not an option for new servers that you create in the console.
- Existing servers can enable structured JSON logging through the console at any time.
- Enabling structured JSON logging through the console disables the existing logging method, so as to not double charge customers. The exception is if a workflow is attached to the server.
- If you enable structured JSON logging, you cannot later disable it through the console.
- If you enable structured JSON logging, you can change the log group destination through the console at any time.
- If you enable structured JSON logging, you cannot edit the logging role through the console if you have enabled both logging types through the API. The exception is if your server has a workflow attached. However, the logging role does continue to appear in **Additional details**.

Logging considerations for creating and editing servers using the API or SDK

- If you create a new server through the API, you can configure either or both types of logging, or choose no logging.
- For existing servers, enable and disable structured JSON logging at any time.
- You can change the log group through the API at any time.
- You can change the logging role through the API at any time.

To enable structured logging, you must be logged into an account with the following permissions

- `logs:CreateLogDelivery`
- `logs>DeleteLogDelivery`
- `logs:DescribeLogGroups`
- `logs:DescribeResourcePolicies`
- `logs:GetLogDelivery`
- `logs:ListLogDeliveries`
- `logs:PutResourcePolicy`
- `logs:UpdateLogDelivery`

An example policy is available in the section [Configure CloudWatch logging role](#).

Topics

- [Creating logging for servers](#)
- [Updating logging for a server](#)
- [Viewing the server configuration](#)

Creating logging for servers

When you create a new server, on the **Configure additional details** page, you can specify an existing log group, or create a new one.

The screenshot shows the 'Configure additional details' page in the AWS Management Console. The breadcrumb trail is 'Transfer Family > Servers > Create server'. The page is divided into six steps: Step 1 (Choose protocols), Step 2 (Choose an identity provider), Step 3 (Choose an endpoint), Step 4 (Choose a domain), Step 5 (Configure additional details), and Step 6 (Review and create). The 'Configure additional details' section is active and contains the following options:

- Logging info**: Choose the CloudWatch log group where your events will be delivered in a structured JSON format.
 - Create a new log group
 - Choose an existing log group
- Below the radio buttons is a text input field containing '/aws/transfer/' followed by a dropdown arrow, a refresh button, and a 'Create log group' button with an external link icon.
- Logging role info**: Choose the IAM role that will be used to deliver events to your CloudWatch logs.
 - Create a new role
 - Choose an existing role
- A blue information box at the bottom states: 'Logging role is only required when selecting a workflow in the Managed workflows section below.'

If you choose **Create log group**, the CloudWatch console (<https://console.amazonaws.cn/cloudwatch/>) opens to the **Create log group** page. For details, see [Create a log group in CloudWatch Logs](#).

Updating logging for a server

The details for logging depend on the scenario for your update.

Note

When you opt into structured JSON logging, there can be a delay, in rare cases, where Transfer Family stops logging in the old format, but takes some time to start logging in the new JSON format. This can result in events that don't get logged. There won't be any service disruptions, but you should be careful transferring files during the first hour after changing your logging method, as logs could be dropped.

If you are editing an existing server, your options depend on the state of the server.

- The server already has a logging role enabled, but does not have Structured JSON logging enabled.

Edit additional details

Logging [Info](#)

Log group [Info](#)
Choose an existing log group from the dropdown or create a new log group in Amazon CloudWatch

Enable structured JSON logging

Info Enabling the structured JSON log format will override your existing logging configuration. Potential changes include new log format and log group.

Logging Role [Info](#)
Select an existing role from your account

Info Workflows events will be delivered to a log group labelled with the server ID.

- The server does not have any logging enabled.

Edit additional details

Logging [Info](#)

Log group [Info](#)

Choose an existing log group from the dropdown or create a new log group in Amazon CloudWatch

Enable structured JSON logging

Choose an existing log group ▼



Create log group ↗

Logging Role [Info](#)


Select an existing role from your account

Choose a role ▼



Logging role is only required when selecting a workflow in the Managed workflows section below.

- The server already has Structured JSON logging enabled, but does not have a logging role specified.

Transfer Family > Servers > s- > Edit additional details



Edit additional details

Logging [Info](#)

Structured JSON log format
Logs delivered to specified CloudWatch log group in structured JSON format

Enable

Create a new log group
 Choose an existing log group

  Transfer Family needs to group your server activity into a CloudWatch log group. By continuing, you are allowing us to create a new log group.

- The server already has Structured JSON logging enabled, and also has a logging role specified.

Edit additional details


Logging [Info](#)

Log group [Info](#)
Choose an existing log group from the dropdown or create a new log group in Amazon CloudWatch

Enable structured JSON logging

"/>

Logging Role [Info](#)
Select an existing role from your account

 Workflows events will be delivered to a log group labelled with the server ID.

Viewing the server configuration

The details for the server configuration page depend on your scenario:

Depending on your scenario, the server configuration page might look like one of the following examples:

- No logging is enabled.

Additional details
Edit

<p>Logging role Info TransferLoggingAccess ↗</p> <p>Server host key Info SHA256: </p> <p>Workflow for complete uploads -</p> <p>Workflow for partial uploads -</p>	<p>Structured JSON Logging -</p> <p>Security Policy Info TransferSecurityPolicy-2020-06</p> <p>Domain Amazon S3</p> <p>Managed workflows execution role -</p>	<p>Login display banner View the display message</p> <p>SetStat option Ignore</p> <p>TLS session resumption Enforce</p> <p>Passive IP -</p>
--	---	---

- Structured JSON logging is enabled.

Additional details
Edit

<p>Log group /aws/transfer/s- ↗</p> <p>Logging role Info -</p> <p>Server host key Info SHA256: </p> <p>Security Policy Info TransferSecurityPolicy-2020-06</p>	<p>Domain Amazon S3</p> <p>Workflow for complete uploads -</p> <p>Workflow for partial uploads -</p> <p>Managed workflows execution role -</p>	<p>Login display banner View the display message</p> <p>SetStat option Ignore</p> <p>TLS session resumption -</p> <p>Passive IP -</p>
--	--	---

- Logging role is enabled, but structured JSON logging is not enabled.

- Both types of logging (logging role and structured JSON logging) are enabled.

Managing logging for workflows

CloudWatch provides consolidated auditing and logging for workflow progress and results. Additionally, Amazon Transfer Family provides several metrics for workflows. You can view metrics for how many workflows executions started, completed successfully, and failed in the previous minute. All of the CloudWatch metrics for Transfer Family are described in [Using CloudWatch metrics for Transfer Family servers](#).

View Amazon CloudWatch logs for workflows

1. Open the Amazon CloudWatch console at <https://console.amazonaws.cn/cloudwatch/>.
2. In the left navigation pane, choose **Logs**, then choose **Log groups**.

3. On the **Log groups** page, on the navigation bar, choose the correct Region for your Amazon Transfer Family server.
4. Choose the log group that corresponds to your server.

For example, if your server ID is `s-1234567890abcdef0`, your log group is `/aws/transfer/s-1234567890abcdef0`.

5. On the log group details page for your server, the most recent log streams are displayed. There are two log streams for the user that you are exploring:
 - One for each Secure Shell (SSH) File Transfer Protocol (SFTP) session.
 - One for the workflow that is being executed for your server. The format for the log stream for the workflow is `username.workflowID.uniqueStreamSuffix`.

For example, if your user is `mary-major`, you have the following log streams:

```
mary-major-east.1234567890abcdef0
mary.w-abcdef01234567890.021345abcdef6789
```

 **Note**

The 16-digit alphanumeric identifiers listed in this example are fictitious. The values that you see in Amazon CloudWatch are different.

The **Log events** page for `mary-major-usa-east.1234567890abcdef0` displays the details for each user session, and the `mary.w-abcdef01234567890.021345abcdef6789` log stream contains the details for the workflow.

The following is a sample log stream for `mary.w-abcdef01234567890.021345abcdef6789`, based on a workflow (`w-abcdef01234567890`) that contains a copy step.

```
{
  "type": "ExecutionStarted",
  "details": {
    "input": {
      "initialFileLocation": {
        "bucket": "amzn-s3-demo-bucket",
        "key": "mary/workflowSteps2.json",
```

```
        "versionId": "version-id",
        "etag": "etag-id"
    }
},
"workflowId": "w-abcdef01234567890",
"executionId": "execution-id",
"transferDetails": {
    "serverId": "s-server-id",
    "username": "mary",
    "sessionId": "session-id"
}
},
{
    "type": "StepStarted",
    "details": {
        "input": {
            "fileLocation": {
                "backingStore": "S3",
                "bucket": "amzn-s3-demo-bucket",
                "key": "mary/workflowSteps2.json",
                "versionId": "version-id",
                "etag": "etag-id"
            }
        },
        "stepType": "COPY",
        "stepName": "copyToShared"
    },
    "workflowId": "w-abcdef01234567890",
    "executionId": "execution-id",
    "transferDetails": {
        "serverId": "s-server-id",
        "username": "mary",
        "sessionId": "session-id"
    }
},
{
    "type": "StepCompleted",
    "details": {
        "output": {},
        "stepType": "COPY",
        "stepName": "copyToShared"
    },
    "workflowId": "w-abcdef01234567890",
```

```

    "executionId": "execution-id",
    "transferDetails": {
      "serverId": "server-id",
      "username": "mary",
      "sessionId": "session-id"
    }
  },
  {
    "type": "ExecutionCompleted",
    "details": {},
    "workflowId": "w-abcdef01234567890",
    "executionId": "execution-id",
    "transferDetails": {
      "serverId": "s-server-id",
      "username": "mary",
      "sessionId": "session-id"
    }
  }
}

```

Configure CloudWatch logging role

To set access, you create a resource-based IAM policy and an IAM role that provides that access information.

To enable Amazon CloudWatch logging, you start by creating an IAM policy that enables CloudWatch logging. You then create an IAM role and attach the policy to it. You can do this when you are [creating a server](#) or by [editing an existing server](#). For more information about CloudWatch, see [What is Amazon CloudWatch?](#) and [What is Amazon CloudWatch logs?](#) in the *Amazon CloudWatch User Guide*.

Use the following example IAM policies to allow CloudWatch logging.

Use a logging role

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "logs:CreateLogStream",

```

```

        "logs:DescribeLogStreams",
        "logs:CreateLogGroup",
        "logs:PutLogEvents"
    ],
    "Resource": "arn:aws-cn:logs:*:*:log-group:/aws/transfer/*"
}
]
}

```

Use structured logging

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "logs:CreateLogDelivery",
        "logs:GetLogDelivery",
        "logs:UpdateLogDelivery",
        "logs>DeleteLogDelivery",
        "logs>ListLogDeliveries",
        "logs:PutResourcePolicy",
        "logs:DescribeResourcePolicies",
        "logs:DescribeLogGroups"
      ],
      "Resource": "*"
    }
  ]
}

```

In the preceding example policy, for the **Resource**, replace the *region-id* and *Amazon Web Services account* with your values. For example, **"Resource": "arn:aws-cn::logs:us-east-1:111122223333:log-group:/aws/transfer/*"**

You then create a role and attach the CloudWatch Logs policy that you created.

To create an IAM role and attach a policy

1. In the navigation pane, choose **Roles**, and then choose **Create role**.

On the **Create role** page, make sure that **Amazon service** is chosen.

2. Choose **Transfer** from the service list, and then choose **Next: Permissions**. This establishes a trust relationship between Amazon Transfer Family and the IAM role. Additionally, add `aws:SourceAccount` and `aws:SourceArn` condition keys to protect yourself against the *confused deputy* problem. See the following documentation for more details:
 - Procedure for establishing a trust relationship with Amazon Transfer Family: [To establish a trust relationship](#)
 - Description for confused deputy problem: [the confused deputy problem](#)
3. In the **Attach permissions policies** section, locate and choose the CloudWatch Logs policy that you just created, and choose **Next: Tags**.
4. (Optional) Enter a key and value for a tag, and choose **Next: Review**.
5. On the **Review** page, enter a name and description for your new role, and then choose **Create role**.
6. To view the logs, choose the **Server ID** to open the server configuration page, and choose **View logs**. You are redirected to the CloudWatch console where you can see your log streams.

On the CloudWatch page for your server, you can see records of user authentication (success and failure), data uploads (PUT operations), and data downloads (GET operations).

Viewing Transfer Family log streams

To view your Transfer Family server logs

1. Navigate to the details page for a server.
2. Choose **View logs**. This opens Amazon CloudWatch.
3. The log group for your selected server is displayed.

The screenshot displays the AWS CloudWatch console interface. On the left is a navigation sidebar with categories like Dashboards, Alarms, Logs, Metrics, X-Ray traces, Events, Application monitoring, and Insights. The main content area shows the details for a log group named `/aws/transfer/s-`. The **Log group details** section includes:

- ARN:** `arn:aws:logs:us-east-2:5:log-group:/aws/transfer/s-:*`
- Creation time:** 2 years ago
- Retention:** Never expire
- Stored bytes:** 39.39 MB
- Metric filters:** 0
- Subscription filters:** 0
- Contributor Insights rules:** -
- Data protection - new:** Inactive
- Sensitive data found - new:** -
- KMS key ID:** -

Below the details is a tabbed interface with **Log streams** selected. It shows a list of 10 log streams:

Log stream	Last event
ERRORS	2023-
scooterstack4-	2023-
scooterstack4-	2023-
scooterstack4-	2023-

4. You can select a log stream to display details and individual entries for the stream.
 - If there is a listing for **ERRORS**, you can choose it to view details for the latest errors for the server.

CloudWatch > Log groups > /aws/transfer/s- > ERRORS

Log events

You can use the filter bar below to search for and match terms, phrases, or values in your log events. [Learn more about filter patterns](#)

Timestamp	Message
There are older events to load. Load more.	
2023-03-23T16:08:29.281-04:00	ERRORS AUTH_FAILURE Method=password User=ubuntu Message= SourceIP=
2023-03-23T16:08:30.979-04:00	ERRORS AUTH_FAILURE Method=password User=ubuntu Message= SourceIP=
2023-03-23T16:08:32.647-04:00	ERRORS AUTH_FAILURE Method=password User=ubuntu Message= SourceIP=
2023-03-23T16:08:34.306-04:00	ERRORS AUTH_FAILURE Method=password User=ubuntu Message= SourceIP=
2023-03-23T16:08:36.010-04:00	ERRORS AUTH_FAILURE Method=password User=ubuntu Message= SourceIP=
2023-03-23T16:08:37.659-04:00	ERRORS AUTH_FAILURE Method=password User=ubuntu Message= SourceIP=
2023-03-23T16:12:33.307-04:00	ERRORS AUTH_FAILURE Method=password User=scooterstack4 Message="Missing POSIX profile" Source...
2023-03-23T16:12:34.943-04:00	ERRORS AUTH_FAILURE Method=password User=scooterstack4 Message="Missing POSIX profile" Source... ERRORS AUTH_FAILURE Method=password User=scooterstack4 Message="Missing POSIX profile" SourceIP=
2023-03-23T16:12:56.857-04:00	ERRORS AUTH_FAILURE Method=password User=debian Message= SourceIP= ERRORS AUTH_FAILURE Method=password User=debian Message= SourceIP=
2023-03-23T16:12:58.430-04:00	ERRORS AUTH_FAILURE Method=password User=debian Message= SourceIP= ERRORS AUTH_FAILURE Method=password User=debian Message= SourceIP=
2023-03-23T16:13:00.106-04:00	ERRORS AUTH_FAILURE Method=password User=debian Message= SourceIP=

- Choose any other entry to see an example log stream.

CloudWatch > Log groups > /aws/transfer/s- > scooterstack4.

Log events

You can use the filter bar below to search for and match terms, phrases, or values in your log events. [Learn more about filter patterns](#)

Timestamp	Message
No older events at this moment. Retry	
2023-03-23T16:19:43.747-04:00	scooterstack4. CONNECTED SourceIP= User=scooterstack4 HomeDir=/fs- scooterstack4. CONNECTED SourceIP= User=scooterstack4 HomeDir=/fs- Client=SSH-2.0- OpenSSH_7.4 Role=arn:aws:iam:: :role/ Kex=
2023-03-23T16:19:47.030-04:00	scooterstack4. DISCONNECTED scooterstack4. DISCONNECTED
No newer events at this moment. Auto retry paused. Resume	

- If your server has a managed workflow associated with it, you can view logs for the workflow runs.

Note

The format for the log stream for the workflow is *username.workflowId.uniqueStreamSuffix*. For example, **decrypt-user.w-a1111222233334444.aaaa1111bbbb2222** could be the name of a log stream for user **decrypt-user** and workflow **w-a1111222233334444**.

CloudWatch > Log groups > /aws/transfer/s- > decrypt-user.w-

Log events
You can use the filter bar below to search for and match terms, phrases, or values in your log events. [Learn more about filter patterns](#)

Actions Create metric filter

Filter events Clear 1m 30m 1h 12h Custom Display

Timestamp	Message
There are older events to load. Load more	
2023-03-21T13:37:57.795-04:00	<code>{"type": "StepStarted", "details": {"input": {"fileLocation": {"backingStore": "S3", "bucket": "...", "key": "decrypt-...</code>
2023-03-21T14:12:02.850-04:00	<pre> { "type": "StepStarted", "details": { "input": { "fileLocation": { "backingStore": "S3", "bucket": "...", "key": "decrypt-user/test.json.gpg", "versionId": "...", "etag": "..." } } }, "stepType": "DECRYPT", "stepName": "decrypt-step" }, "workflowId": "w-...", "executionId": "...", "transferDetails": { "serverId": "s-...", "username": "decrypt-user", "sessionId": "..." } </pre>
2023-03-21T14:12:03.464-04:00	<code>{"type": "StepCompleted", "details": {"output": {}}, "stepType": "DECRYPT", "stepName": "decrypt-step"}, "workflowId": "w-</code>

Note

For any expanded log entry, you can copy the entry to the clipboard by choosing **Copy**. For more details about CloudWatch logs, see [Viewing log data](#).

Creating Amazon CloudWatch alarms

The following example shows how to create Amazon CloudWatch alarms using the Amazon Transfer Family metric, FilesIn.

CDK

```
new cloudwatch.Metric({
  namespace: "AWS/Transfer",
  metricName: "FilesIn",
  dimensionsMap: { ServerId: "s-000000000000000000" },
  statistic: "Average",
  period: cdk.Duration.minutes(1),
}).createAlarm(this, "AWS/Transfer FilesIn", {
  threshold: 1000,
  evaluationPeriods: 10,
  datapointsToAlarm: 5,
  comparisonOperator:
  cloudwatch.ComparisonOperator.GREATER_THAN_OR_EQUAL_TO_THRESHOLD,
});
```

Amazon CloudFormation

```
Type: AWS::CloudWatch::Alarm
Properties:
  Namespace: AWS/Transfer
  MetricName: FilesIn
  Dimensions:
    - Name: ServerId
      Value: s-000000000000000000
  Statistic: Average
  Period: 60
  Threshold: 1000
  EvaluationPeriods: 10
  DatapointsToAlarm: 5
  ComparisonOperator: GreaterThanOrEqualToThreshold
```

Logging Amazon S3 API operations to S3 access logs

Note

This section does not apply to Transfer Family web apps.

If you are [using Amazon S3 access logs to identify S3 requests](#) made on behalf of your file transfer users, `RoleSessionName` is used to display which IAM role was assumed to service the file transfers. It also displays additional information such as the user name, session id, and server-id used for the transfers. The format is `[AWS:Role Unique Identifier]/username.sessionid@server-id` and is contained in the `Requester` field. For example, the following are the contents for a sample `Requester` field from an S3 access log for a file that was copied to the S3 bucket.

```
arn:aws-cn:sts::AWS-Account-ID:assumed-role/IamRoleName/  
username.sessionid@server-id
```

In the `Requester` field above, it shows the IAM Role called `IamRoleName`. For more information about IAM role unique identifiers, see [Unique identifiers](#) in the *Amazon Identity and Access Management User Guide*.

Examples to limit confused deputy problem

The confused deputy problem is a security issue where an entity that doesn't have permission to perform an action can coerce a more-privileged entity to perform the action. In Amazon, cross-service impersonation can result in the confused deputy problem. For more details, see [Cross-service confused deputy prevention](#).

Note

In the following examples, replace each *user input placeholder* with your own information.

In these examples, you can remove the ARN details for a workflow if your server doesn't have any workflows attached to it.

The following example logging/invocation policy allows any server (and workflow) in the account to assume the role.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowAllServersWithWorkflowAttached",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {
          "aws:SourceAccount": "account-id"
        },
        "ArnLike": {
          "aws:SourceArn": [
            "arn:aws-cn:transfer:region:account-id:server/*",
            "arn:aws-cn:transfer:region:account-id:workflow/*"
          ]
        }
      }
    }
  ]
}
```

The following example logging/invocation policy allows a specific server (and workflow) to assume the role.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowSpecificServerWithWorkflowAttached",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {
```

```

        "aws:SourceAccount": "account-id"
    },
    "ArnEquals": {
        "aws:SourceArn": [
            "arn:aws-cn:transfer:region:account-id:server/server-id",
            "arn:aws-cn:transfer:region:account-id:workflow/workflow-id"
        ]
    }
}

```

CloudWatch log structure for Transfer Family

This topic describes the fields that are populated in Transfer Family logs: both for JSON structured log entries and legacy log entries.

Topics

- [JSON structured logs for Transfer Family](#)
- [Legacy logs for Transfer Family](#)

JSON structured logs for Transfer Family

The following table contains details for log entry fields for Transfer Family SFTP/FTP/FTPS actions, in the new JSON structured log format.

Field	Description	Example entry
activity-type	The action by the user	The available activity types are as follows: AUTH_FAILURE , CONNECTED , DISCONNECTED , ERROR, EXIT_REASON , CLOSE, CREATE_SYMLINK , DELETE, MKDIR, OPEN, PARTIAL_CLOSE , RENAME, RMDIR,

Field	Description	Example entry
		SETSTAT, TLS_RESUME_FAILURE .
bytes-in	Number of bytes uploaded by the user	29238420042
bytes-out	Number of bytes downloaded by the user	23094032490328
ciphers	Specifies the SSH cipher negotiated for the connection (available ciphers are listed in Cryptographic algorithms)	aes256-gcm@openssh.com
client	The user's client software	SSH-2.0-OpenSSH_7.4
home-dir	The directory that the end user lands on when they connect to the endpoint if their home directory type is PATH: if they have a logical home directory, this value is always /	/user-home-bucket/test
kex	Specifies the negotiated SSH key exchange (KEX) for the connection (available KEX are listed in Cryptographic algorithms)	diffie-hellman-group14-sha256
message	Provides more information related to the error	<i><string></i>
method	The authentication method	publickey
mode	Specifies how a client opens a file	CREATE TRUNCATE WRITE

Field	Description	Example entry
operation	The client operation on a file	OPEN CLOSE
path	Actual file path affected	/amzn-s3-demo-bucket/test-file-1.pdf
ssh-public-key	The public key body for the user that is connecting	AAAAC3NzaC1lZDI1NT E5AAAAIA9OY0qV6XYV HaaOiWAcj2spDJVbgj rqDPY4pxd6GnHl
ssh-public-key-fingerprint	The public key fingerprint, as shown in the console for service-managed users when listing their user keys.	SHA256:BY3gNMHwTfj d4n2VuT4pTyLOk82zW Zj4KEYEu7y4r/0
<div data-bbox="591 873 1031 1476"><p>Note</p><p>In the console, the fingerprint is displayed with the padding characters (if any): from 0 to 3 equal signs (=) at the end. In the log entry, this padding is stripped from the output.</p></div>		
ssh-public-key-type	Type of public key: Transfer Family supports RSA-, ECDSA-, and ED25519-formatted keys	ssh-ed25519

Field	Description	Example entry
resource-arn	A system-assigned, unique identifier for a specific resource (for example, a server)	arn:aws-cn:transfer:ap-northeast-1:12346789012:server/s-1234567890akeu2js2
role	The IAM role of the user	arn:aws-cn:iam::0293883675:role/testuser-role
session-id	A system-assigned, unique identifier for a single session	9ca9a0e1cec6ad9d
source-ip	Client IP address	18.323.0.129
user	The end user's username	myname192
user-policy	The permissions specified for the end user: this field is populated if the user's policy is a session policy.	The JSON code for the session policy that is being used

Legacy logs for Transfer Family

The following table contains details for log entries for various Transfer Family actions.

Note

These entries are not in the new JSON structured log format.

The following table contains details for log entries for various Transfer Family actions, in the new JSON structured log format.

Action	Corresponding logs within Amazon CloudWatch Logs
Authentication failures	<pre>ERRORS AUTH_FAILURE Method=pu blickey User=lhr Message="RSA SHA256:Lf z3R2nmLY4raK+b7Rb1rSvUIbAE+a+Hxg0c7l 1JIZ0" SourceIP=3.8.172.211</pre>
COPY/TAG/DELETE/DECRYPT workflow	<pre>{"type":"StepStarted","details":{"input":{"fi leLocation":{"backingStore":"EFS","filesystem Id":"fs-12345678","path":"/lhr/regex.py"},"s tepType":"TAG","stepName":"successfu l_tag_step"},"workflowId":"w-1111aaa a2222bbbb3","executionId":"81234abcd-1234- efgh-5678-ijklmnopqr90","transferDetails": {"serverId":"s-1234abcd5678efghi","usernam e":"lhr","sessionId":"1234567890abcdef0"}}</pre>
Custom step workflow	<pre>{"type":"CustomStepInvoked","details":{"output": {"token":"MzM4Mjg5YWUtYTEzMy00YjI zLWI3OGMtYzU4OGI2ZjQyMzE5"},"stepTyp e":"CUSTOM","stepName":"efs-s3_copy_ 2"},"workflowId":"w-9283e49d33297c3f 7","executionId":"1234abcd-1234-efgh-5678- ijklmnopqr90","transferDetails":{"serverId":"s- zzzz1111aaaa22223","username":"lhr"," sessionId":"1234567890abcdef0"}}</pre>
Deletes	<pre>lhr.33a8fb495ffb383b DELETE Path=/bucket/ user/123.jpg</pre>
Downloads	<pre>lhr.33a8fb495ffb383b OPEN Path=/bucket/ user/123.jpg Mode=READ llhr.33a8fb495ffb383b CLOSE Path=/bucket/ user/123.jpg BytesOut=3618546</pre>

Action	Corresponding logs within Amazon CloudWatch Logs
Logins/Logouts	<pre>user.914984e553bcddb6 CONNECTED SourceIP=1.22.111.222 User=lhr HomeDir=LOGICAL Client=SSH-2.0-OpenSSH_7.4 Role=arn:aws-cn::iam::123456789012:role/sftp-s3-access user.914984e553bcddb6 DISCONNECTED</pre>
Renames	<pre>lhr.33a8fb495ffb383b RENAME Path=/bucket/user/lambo.png NewPath=/bucket/user/ferrari.png</pre>
Sample workflow error log	<pre>{"type":"StepErrored","details":{"errorType":"BAD_REQUEST","errorMessage":"Cannot tag Efs file","stepType":"TAG","stepName":"successful_tag_step"},"workflowId":"w-1234abcd5678efghi","executionId":"81234abcd-1234-efgh-5678-ijklmnopqr90","transferDetails":{"serverId":"s-1234abcd5678efghi","username":"lhr","sessionId":"1234567890abcdef0"}}</pre>
Symlinks	<pre>lhr.eb49cf7b8651e6d5 CREATE_SYMLINK LinkPath=/fs-12345678/lhr/pqr.jpg TargetPath=abc.jpg</pre>
Uploads	<pre>lhr.33a8fb495ffb383b OPEN Path=/bucket/user/123.jpg Mode=CREATE TRUNCATE WRITE lhr.33a8fb495ffb383b CLOSE Path=/bucket/user/123.jpg BytesIn=3618546</pre>

Action	Corresponding logs within Amazon CloudWatch Logs
Workflows	<pre data-bbox="829 275 1495 1192">{"type":"ExecutionStarted","details":{"input":{"initialFileLocation":{"backingStore":"EFS","filesystemId":"fs-12345678","path":"/lhr/regex.py"}}},"workflowId":"w-1111aaaa2222bbb3","executionId":"1234abcd-1234-efgh-5678-ijklmnopqr90","transferDetails":{"serverId":"s-zzzz1111aaaa22223","username":"lhr","sessionId":"1234567890abcdef0"}} {"type":"StepStarted","details":{"input":{"fileLocation":{"backingStore":"EFS","filesystemId":"fs-12345678","path":"/lhr/regex.py"}},"stepType":"CUSTOM","stepName":"efs-s3_copy_2"},"workflowId":"w-9283e49d33297c3f7","executionId":"1234abcd-1234-efgh-5678-ijklmnopqr90","transferDetails":{"serverId":"s-18ca49dce5d842e0b","username":"lhr","sessionId":"1234567890abcdef0"}}</pre>

Example CloudWatch log entries

This topic presents example log entries.

Topics

- [Example transfer sessions log entries](#)
- [Example log entries for SFTP connectors](#)
- [Example log entries for Key exchange algorithm failures](#)

Example transfer sessions log entries

In this example, an SFTP user connects to a Transfer Family server, uploads a file, then disconnects from the session.

The following log entry reflects an SFTP user connecting to a Transfer Family server.

```
{
  "role": "arn:aws:iam::500655546075:role/transfer-s3",
  "activity-type": "CONNECTED",
  "ciphers": "chacha20-poly1305@openssh.com,chacha20-poly1305@openssh.com",
  "client": "SSH-2.0-OpenSSH_7.4",
  "source-ip": "52.94.133.133",
  "resource-arn": "arn:aws:transfer:us-east-1:500655546075:server/
s-3fe215d89f074ed2a",
  "home-dir": "/test/log-me",
  "ssh-public-key":
"AAAAC3NzaC1lZDI1NTE5AAAAIA90Y0qV6XYVHaa0iWAcj2spDJVbgjrqpDPY4pxd6GnH1",
  "ssh-public-key-fingerprint": "SHA256:BY3gNMHwTfjd4n2VuT4pTyL0k82zWZj4KEYEu7y4r/0",
  "ssh-public-key-type": "ssh-ed25519",
  "user": "log-me",
  "kex": "ecdh-sha2-nistp256",
  "session-id": "9ca9a0e1cec6ad9d"
}
```

The following log entry reflects the SFTP user uploading a file into their Amazon S3 bucket.

```
{
  "mode": "CREATE|TRUNCATE|WRITE",
  "path": "/test/log-me/config-file",
  "activity-type": "OPEN",
  "resource-arn": "arn:aws:transfer:us-east-1:500655546075:server/
s-3fe215d89f074ed2a",
  "session-id": "9ca9a0e1cec6ad9d"
}
```

The following log entries reflect the SFTP user disconnecting from their SFTP session. First, the client closes the connection to the bucket, and then the client disconnects the SFTP session.

```
{
  "path": "/test/log-me/config-file",
```

```

    "activity-type": "CLOSE",
    "resource-arn": "arn:aws:transfer:us-east-1:500655546075:server/
s-3fe215d89f074ed2a",
    "bytes-in": "121",
    "session-id": "9ca9a0e1cec6ad9d"
}

{
    "activity-type": "DISCONNECTED",
    "resource-arn": "arn:aws:transfer:us-east-1:500655546075:server/
s-3fe215d89f074ed2a",
    "session-id": "9ca9a0e1cec6ad9d"
}

```

Note

The available activity types are as follows: AUTH_FAILURE, CONNECTED, DISCONNECTED, ERROR, EXIT_REASON, CLOSE, CREATE_SYMLINK, DELETE, MKDIR, OPEN, PARTIAL_CLOSE, RENAME, RMDIR, SETSTAT, TLS_RESUME_FAILURE.

Example log entries for SFTP connectors

This section contains example logs for both a successful and an unsuccessful transfer. Logs are generated to a log group named `/aws/transfer/connector-id`, where *connector-id* is the identifier for your SFTP connector. Log entries for SFTP connectors are generated when you run either a `StartFileTransfer` or `StartDirectoryListing` command.

This log entry is for a transfer that completed successfully.

```

{
    "operation": "RETRIEVE",
    "timestamp": "2023-10-25T16:33:27.373720Z",
    "connector-id": "connector-id",
    "transfer-id": "transfer-id",
    "file-transfer-id": "transfer-id/file-transfer-id",
    "url": "sftp://192.0.2.0",
    "file-path": "/remotebucket/remotefilepath",
    "status-code": "COMPLETED",
    "start-time": "2023-10-25T16:33:26.945481Z",
    "end-time": "2023-10-25T16:33:27.159823Z",
}

```

```

"account-id": "480351544584",
"connector-arn": "arn:aws:transfer:us-east-1:account-id:connector/connector-id",
"local-directory-path": "/connectors-localbucket"
"bytes": 514
}

```

This log entry is for a transfer that timed out, and thus was not completed successfully.

```

{
  "operation": "RETRIEVE",
  "timestamp": "2023-10-25T22:33:47.625703Z",
  "connector-id": "connector-id",
  "transfer-id": "transfer-id",
  "file-transfer-id": "transfer-id/file-transfer-id",
  "url": "sftp://192.0.2.0",
  "file-path": "/remotebucket/remotefilepath",
  "status-code": "FAILED",
  "failure-code": "TIMEOUT_ERROR",
  "failure-message": "Transfer request timeout.",
  "account-id": "480351544584",
  "connector-arn": "arn:aws:transfer:us-east-1:account-id:connector/connector-id",
  "local-directory-path": "/connectors-localbucket"
}

```

This log entry is for a SEND operation that succeeds.

```

{
  "operation": "SEND",
  "timestamp": "2024-04-24T18:16:12.513207284Z",
  "connector-id": "connector-id",
  "transfer-id": "transfer-id",
  "file-transfer-id": "transfer-id/file-transfer-id",
  "url": "sftp://server-id.server.transfer.us-east-1.amazonaws.com",
  "file-path": "/amzn-s3-demo-bucket/my-test-folder/connector-metrics-us-east-1-2024-01-02.csv",
  "status-code": "COMPLETED",
  "start-time": "2024-04-24T18:16:12.295235884Z",
  "end-time": "2024-04-24T18:16:12.461840732Z",
  "account-id": "255443218509",
  "connector-arn": "arn:aws:transfer:us-east-1:account-id:connector/connector-id",
  "bytes": 275
}

```

Descriptions for some key fields in the previous log examples.

- `timestamp` represents when the log is added to CloudWatch. `start-time` and `end-time` correspond to when the connector actually starts and finishes a transfer.
- `transfer-id` is a unique identifier that is assigned for each `start-file-transfer` request. If the user passes multiple file paths in a single `start-file-transfer` API operation, all the files share the same `transfer-id`.
- `file-transfer-id` is a unique value generated for each file transferred. Note that the initial portion of the `file-transfer-id` is the same as `transfer-id`.

Example log entries for Key exchange algorithm failures

This section contains example logs where the Key exchange algorithm (KEX) failed. These are examples from the **ERRORS** log stream for structured logs.

This log entry is an example where there is a host key type error.

```
{
  "activity-type": "KEX_FAILURE",
  "source-ip": "999.999.999.999",
  "resource-arn": "arn:aws:transfer:us-east-1:999999999999:server/
s-99999999999999999999",
  "message": "no matching host key type found",
  "kex": "ecdsa-sha2-nistp256,ecdsa-sha2-nistp384,ecdsa-sha2-nistp521,ecdsa-sha2-
nistp256-cert-v01@openssh.com,ecdsa-sha2-nistp384-cert-v01@openssh.com,ecdsa-sha2-
nistp521-cert-v01@openssh.com,ssh-ed25519,ssh-rsa,ssh-dss"
}
```

This log entry is an example where there is a KEX mismatch.

```
{
  "activity-type": "KEX_FAILURE",
  "source-ip": "999.999.999.999",
  "resource-arn": "arn:aws:transfer:us-east-1:999999999999:server/
s-99999999999999999999",
  "message": "no matching key exchange method found",
  "kex": "diffie-hellman-group1-sha1,diffie-hellman-group14-sha1,diffie-hellman-
group14-sha256"
}
```

Using CloudWatch metrics for Transfer Family servers

Note

You can also get metrics for Transfer Family from within the Transfer Family console itself. For details, see [Monitoring usage in the console](#)

You can get information about your server using CloudWatch metrics. A *metric* represents a time-ordered set of data points that are published to CloudWatch. When using metrics, you must specify the Transfer Family namespace, metric name, and [dimension](#). For more information about metrics, see [Metrics](#) in the *Amazon CloudWatch User Guide*.

The following table describes the CloudWatch metrics for Transfer Family.

Namespace	Metric	Description
AWS/Transfer	BytesIn	<p>The total number of bytes transferred into the server.</p> <p>Reporting criteria:</p> <ul style="list-style-type: none"> For SFTP/FTP/FTPS: emitted every 5 minutes while a connection is established to the Transfer Family server. If no files or bytes are transferred in the period, "0" is emitted. For AS2: when the customer receives a message in their AS2 server and emitted as soon as the inbound message has finished processing <p>Units: Count</p> <p>Period: 5 minutes</p>
	BytesOut	<p>The total number of bytes transferred out of the server.</p> <p>Reporting criteria:</p> <ul style="list-style-type: none"> For SFTP/FTP/FTPS: emitted every 5 minutes while a connection is established to the Transfer Family

Namespace	Metric	Description
		<p>server. If no files or bytes are transferred in the period, "0" is emitted.</p> <ul style="list-style-type: none"> For AS2: when the customer calls <code>StartFileTransfer</code> from their AS2 connector and emitted as soon as the outbound message has finished processing. <p>Units: Count</p> <p>Period: 5 minutes</p>
	FilesIn	<p>The total number of files transferred into the server.</p> <p>For servers using the AS2 protocol, this metric represents the number of messages received.</p> <p>Reporting criteria:</p> <ul style="list-style-type: none"> For SFTP/FTP/FTPS: emitted every 5 minutes while a connection is established to the Transfer Family server. If no files or bytes are transferred in the period, "0" is emitted. For AS2: when the customer receives a message in their AS2 server and emitted as soon as the inbound message has finished processing. <p>Units: Count</p> <p>Period: 5 minutes</p>

Namespace	Metric	Description
	FilesOut	<p>The total number of files transferred out of the server.</p> <p>Reporting criteria:</p> <ul style="list-style-type: none"> • For SFTP/FTP/FTPS: emitted every 5 minutes while a connection is established to the Transfer Family server. If no files or bytes are transferred in the period, "0" is emitted. • For AS2: when the customer calls <code>StartFileTransfer</code> from their AS2 connector and emitted as soon as the outbound message has finished processing. <p>Units: Count</p> <p>Period: 5 minutes</p>
	InboundMessage	<p>The total number of AS2 messages successfully received from a trading partner.</p> <p>Reporting criteria: When the customer receives a message in their AS2 server and emitted as soon as the inbound message has finished processing successfully</p> <p>Units: Count</p> <p>Period: 5 minutes</p>

Namespace	Metric	Description
	InboundFailedMessage	<p>The total number of AS2 messages that were unsuccessfully received from a trading partner. That is, a trading partner sent a message, but the Transfer Family server was not able to successfully process it.</p> <p>Reporting criteria: When the customer receives a message in their AS2 server and emitted as soon as the inbound message has finished processing unsuccessfully</p> <p>Units: Count</p> <p>Period: 5 minutes</p>
	OnUploadExecutionsStarted	<p>The total number of workflow executions started on the server.</p> <p>Reporting criteria: Triggered every time an execution starts</p> <p>Units: Count</p> <p>Period: 1 minute</p>
	OnUploadExecutionsSuccess	<p>The total number of successful workflow executions on the server.</p> <p>Reporting criteria: Triggered every time an execution successfully finishes</p> <p>Units: Count</p> <p>Period: 1 minute</p>

Namespace	Metric	Description
	OnUploadExecutionsFailed	<p>The total number of unsuccessful workflow executions on the server.</p> <p>Reporting criteria: Triggered every time an execution does not successfully finish</p> <p>Units: Count</p> <p>Period: 1 minute</p>
	OutboundMessage	<p>The total number of AS2 messages successfully sent to a trading partner.</p> <p>Reporting criteria: When the customer calls <code>StartFileTransfer</code> from their AS2 connector and emitted as soon as the outbound message has finished processing successfully</p> <p>Units: Count</p> <p>Period: 5 minutes</p>
	OutboundFailedMessage	<p>The total number of AS2 messages that were unsuccessfully sent to a trading partner.</p> <p>Reporting criteria: When the customer calls <code>StartFileTransfer</code> from their AS2 connector and emitted as soon as the outbound message has finished processing unsuccessfully</p> <p>Units: Count</p> <p>Period: 5 minutes</p>

Transfer Family dimensions

A *dimension* is a name/value pair that is part of the identity of a metric. For more information about dimensions, see [Dimensions](#) in the *Amazon CloudWatch User Guide*.

The following table describes the CloudWatch dimensions for Transfer Family.

Dimension	Description
ServerId	The unique ID of the server.
ConnectorId	The unique ID of the connector. Used for AS2, for OutboundMessage and OutboundFailedMessage

Using Amazon User Notifications with Amazon Transfer Family

To get notified about Amazon Transfer Family events, you can use [Amazon User Notifications](#) to set up various delivery channels. When an event matches a rule that you specify, you receive a notification.

You can receive notifications for events through multiple channels, including email, [Amazon Q Developer in chat applications](#) chat notifications, or [Amazon Console Mobile Application](#) push notifications. You can also see notifications in the [Console Notifications Center](#). User Notifications supports aggregation, which can reduce the number of notifications that you receive during specific events.

For more information, see the [Customize file delivery notifications using Amazon Transfer Family managed workflows](#) blog post, and [What is Amazon User Notifications?](#) in the *Amazon User Notifications User Guide*.

Using queries to filter log entries

You can use CloudWatch queries to filter and identify log entries for Transfer Family. This section contains some examples.

1. Sign in to the Amazon Web Services Management Console and open the CloudWatch console at <https://console.amazonaws.cn/cloudwatch/>.

2. You can create queries or rules.
 - To create a **Logs Insights** query, choose **Logs Insights** from the left navigation panel, and then enter the details for your query.
 - To create a **Contributor Insights** rule, choose Insights > Contributor Insights from the left navigation panel and then enter the details for your rule.
3. Run the query or rule that you created.

View the top authentication failure contributors

In your structured logs, an authentication failure log entry looks similar to the following:

```
{
  "method": "password",
  "activity-type": "AUTH_FAILURE",
  "source-ip": "999.999.999.999",
  "resource-arn": "arn:aws:transfer:us-east-1:999999999999:server/s-0123456789abcdef",
  "message": "Invalid user name or password",
  "user": "exampleUser"
}
```

Run the following query to view the top contributors to authentication failures.

```
filter @logStream = 'ERRORS'
| filter `activity-type` = 'AUTH_FAILURE'
| stats count() as AuthFailures by user, method
| sort by AuthFailures desc
| limit 10
```

Rather than using **CloudWatch Logs Insights**, you can create a **CloudWatch Contributors Insights** rule to view authentication failures. Create a rule similar to the following.

```
{
  "AggregateOn": "Count",
  "Contribution": {
    "Filters": [
      {
        "Match": "$.activity-type",
        "In": [
          "AUTH_FAILURE"
        ]
      }
    ]
  }
}
```

```
    ]
  }
],
"Keys": [
  "$.user"
],
"LogFormat": "JSON",
"Schema": {
  "Name": "CloudWatchLogRule",
  "Version": 1
},
"LogGroupARNs": [
  "arn:aws:logs:us-east-1:999999999999:log-group:/customer/structured_logs"
]
}
```

View log entries where a file was opened

In your structured logs, a file read log entry looks similar to the following:

```
{
  "mode": "READ",
  "path": "/fs-0df669c89d9bf7f45/avtester/example",
  "activity-type": "OPEN",
  "resource-arn": "arn:aws:transfer:us-east-1:999999999999:server/s-0123456789abcdef",
  "session-id": "0049cd844c7536c06a89"
}
```


Run the following query to view log entries that indicate a file was opened.

```
filter `activity-type` = 'OPEN'
| display @timestamp, @logStream, `session-id`, mode, path
```

Managing Transfer Family events using Amazon EventBridge

Amazon EventBridge is a serverless service that uses events to connect application components together, which can make it easier for you to build scalable event-driven applications. Event-driven architecture is a style of building loosely coupled software systems that work together by emitting and responding to events. Events represent a change in a resource or environment.

As with many Amazon services, Transfer Family generates and sends events to the EventBridge default event bus. Note that the default event bus is automatically provisioned in every Amazon account. An event bus is a router that receives events and delivers them to zero or more destinations, or *targets*. You specify rules for the event bus that evaluates events as they arrive. Each rule checks whether an event matches the rule's *event pattern*. If the event matches, the event bus sends the event to one or more specified targets.

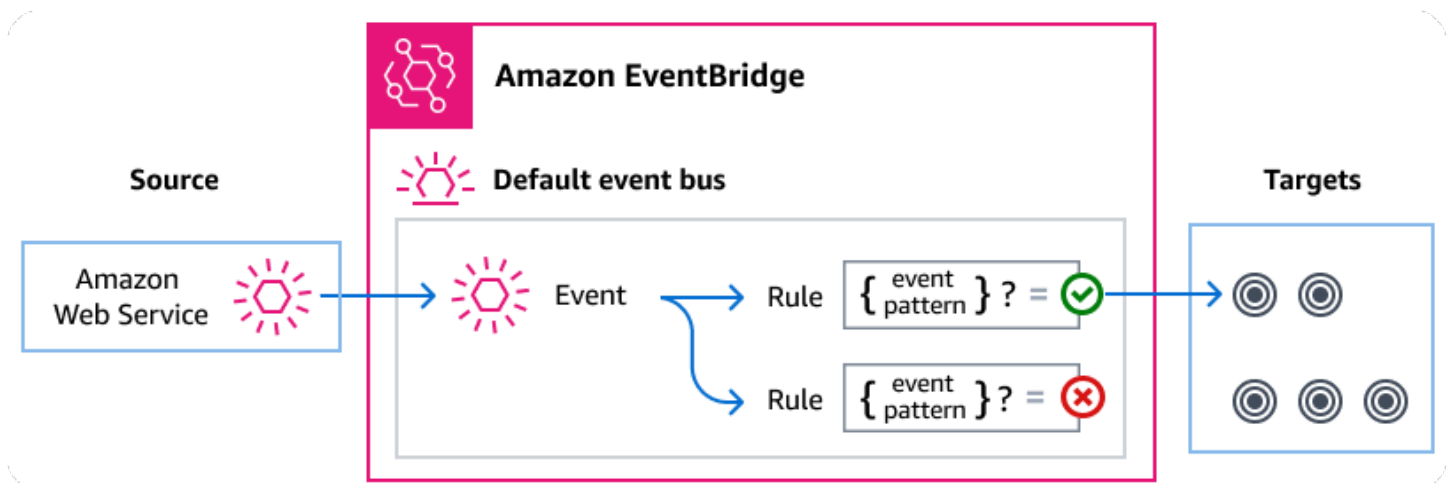

Topics

- [Transfer Family events](#)
- [Sending Transfer Family events by using EventBridge rules](#)
- [Amazon EventBridge permissions](#)
- [Additional EventBridge resources](#)
- [Transfer Family events detail reference](#)

Transfer Family events

Transfer Family automatically sends events to the default EventBridge event bus. You can create rules on the event bus where each rule includes an event pattern and one or more targets. Events that match a rule's event pattern are delivered to the specified targets on a [best effort basis](#), however, some events might be delivered out of order.

The following events are generated by Transfer Family. For more information, see [EventBridge events](#) in the *Amazon EventBridge User Guide*.

SFTP, FTPS, and FTP server events

Event detail type	Description
FTP Server File Download Completed	A file has been downloaded successfully for the FTP protocol.
FTP Server File Download Failed	An attempt to download a file has failed for the FTP protocol.
FTP Server File Upload Completed	A file has been uploaded successfully for the FTP protocol.
FTP Server File Upload Failed	An attempt to upload a file has failed for the FTP protocol.
FTPS Server File Download Completed	A file has been downloaded successfully for the FTPS protocol.
FTPS Server File Download Failed	An attempt to download a file has failed for the FTPS protocol.
FTPS Server File Upload Completed	A file has been uploaded successfully for the FTPS protocol.
FTPS Server File Upload Failed	An attempt to upload a file has failed for the FTPS protocol.
SFTP Server File Download Completed	A file has been downloaded successfully for the SFTP protocol.

Event detail type	Description
SFTP Server File Download Failed	An attempt to download a file has failed for the SFTP protocol.
SFTP Server File Upload Completed	A file has been uploaded successfully for the SFTP protocol.
SFTP Server File Upload Failed	An attempt to upload a file has failed for the SFTP protocol.

SFTP connector events

Event detail type	Description
SFTP Connector File Send Completed	A file transfer from a connector to a remote SFTP server has completed successfully.
SFTP Connector File Send Failed	A file transfer from a connector to a remote SFTP server has failed.
SFTP Connector File Retrieve Completed	A file transfer from a remote SFTP server to a connector has completed successfully.
SFTP Connector File Retrieve Failed	A file transfer from a remote SFTP server to a connector has failed.
SFTP Connector Directory Listing Completed	A start file directory listing call that has completed successfully.
SFTP Connector Directory Listing Failed	A start file directory listing that has failed.
SFTP Connector Remote Move Completed	Files or directories have been moved or renamed successfully on the remote server.
SFTP Connector Remote Move Failed	Files or directories have been failed to be moved or renamed on the remote server.

Event detail type	Description
SFTP Connector Remote Delete Completed	Files or directories have been successfully deleted on the remote server.
SFTP Connector Remote Delete Failed	Files or directories have failed to be deleted on the remote server.

AS2 events

Event detail type	Description
AS2 Payload Receive Completed	The payload for an AS2 message has been received.
AS2 Payload Receive Failed	The payload for an AS2 message has not been received.
AS2 Payload Send Completed	The payload for an AS2 message has been sent successfully.
AS2 Payload Send Failed	The payload for an AS2 message has failed to send.
AS2 MDN Receive Completed	The message disposition notification for an AS2 message has been received.
AS2 MDN Receive Failed	The message disposition notification for an AS2 message has not been received.
AS2 MDN Send Completed	The message disposition notification for an AS2 message has been sent successfully.
AS2 MDN Send Failed	The message disposition notification for an AS2 message has failed to send.

Sending Transfer Family events by using EventBridge rules

If you want the EventBridge default event bus to send Transfer Family events to a target, you must create a rule that contains an event pattern that matches the data in your desired Transfer Family events.

To capture Amazon Transfer Family events in Amazon EventBridge

1. Sign in to the Amazon Web Services Management Console and open the Amazon EventBridge console at <https://console.amazonaws.cn/events/>.
2. In the navigation pane, choose **Rules**, then choose **Create rule**.
3. Enter a descriptive name for the rule, and optionally enter a description.
4. For **Rule type**, select **Rule with an event pattern** then choose **Next**.
5. In the **Event source** section, select **Amazon events or EventBridge partner events**.
6. In the **Creation method** section, choose **Use pattern form**.
7. In the **Event pattern** section, provide the following information.
 - a. For **Event source**, choose **Amazon services**.
 - b. For **Amazon service**, choose **Transfer**.
 - c. For **Event type**, choose the Transfer Family event type that you want to trigger your rule.

Depending upon your **Event type** selection, you may be presented with an **Event Type Specification 1** section.

- d. If you see the **Event Type Specification 1** section, select the specific events you want to capture (or select **Any event** to capture all events for your selected event type).
 - e. (Optional) Use the **Event pattern** editor to specify filters for event details.
 - f. Choose **Next**.
8. Choose a target from the choices available in **Select targets**. Choose from the following available targets.
 - **Amazon service**. Popular options are Lambda functions for serverless compute, Amazon SQS queues for message processing, Amazon SNS topics for notifications, and Amazon Step Functions for orchestrating workflows.
 - **EventBridge API Destination**. If you want to send events to an HTTP endpoint outside of Amazon, you can use an API Destination as your target.

- **EventBridge event bus.** You can send events to another event bus, either in the same account and region or in a different account or region.

For comprehensive instructions on creating event bus rules, see [Creating rules that react to events](#) in the *Amazon EventBridge User Guide*.

For help in selecting a target, see [Select targets](#) in the *Amazon EventBridge User Guide*.

9. Configure any additional options for your target then choose **Next**.
10. (Optional) Add tags to your rule and choose **Next**.
11. In the **Review and create** screen, if everything looks good, choose **Create rule**.

Creating event patterns for Transfer Family events

When Transfer Family delivers an event to the default event bus, EventBridge uses the event pattern defined for each rule to determine if the event should be delivered to the rule's targets. An event pattern matches the data in the desired Transfer Family events. Each event pattern is a JSON object that contains the following:

- A `source` attribute that identifies the service sending the event. For Transfer Family events, the source is `aws.transfer`.
- (Optional) A `detail-type` attribute that contains an array of the event types to match.
- (Optional) A `detail` attribute containing any other event data on which to match.

For example, the following event pattern matches against all events from Transfer Family:

```
{
  "source": ["aws.transfer"]
}
```

The following event pattern example matches all of the SFTP connector events:

```
{
  "source": ["aws.transfer"],
  "detail-type": ["SFTP Connector File Send Completed", "SFTP Connector File Retrieve Completed",
                 "SFTP Connector File Retrieve Failed", "SFTP Connector File Send Failed"]
}
```

```
}
```

The following event pattern example matches all Transfer Family failed events:

```
{
  "source": ["aws.transfer"],
  "detail-type": [{"wildcard", "*Failed"}]
}
```

The following event pattern example matches successful SFTP downloads for user *username*:

```
{
  "source": ["aws.transfer"],
  "detail-type": ["SFTP Server File Download Completed"],
  "detail": {
    "username": [username]
  }
}
```

For more information on writing event patterns, see [Event patterns](#) in the *EventBridge User Guide*.

Testing event patterns for Transfer Family events in EventBridge

You can use the EventBridge Sandbox to quickly define and test an event pattern, without having to complete the broader process of creating or editing a rule. Using the Sandbox, you can define an event pattern and use a sample event to confirm that the pattern matches the desired events. EventBridge gives you the option of creating a new rule by using that event pattern directly from the sandbox.

For more information, see [Testing an event pattern using the EventBridge Sandbox](#) in the *EventBridge User Guide*.

Amazon EventBridge permissions

Transfer Family doesn't require any additional permissions to deliver events to Amazon EventBridge.

The targets that you specify might require specific permissions or configuration. For more details on using specific services for targets, see [Amazon EventBridge targets](#) in the *Amazon EventBridge User Guide*.

Additional EventBridge resources

Refer to the following topics in the [Amazon EventBridge User Guide](#) for more information on how to use EventBridge to process and manage events.

- For detailed information on how event buses work, see [Amazon EventBridge event bus](#).
- For information on event structure, see [Events](#).
- For information on constructing event patterns for EventBridge to use when matching events against rules, see [Event patterns](#).
- For information on creating rules to specify which events EventBridge processes, see [Rules](#).
- For information on how to specify what services or other destinations to which EventBridge sends matched events, see [Targets](#).

Transfer Family events detail reference

All events from Amazon services have a common set of fields containing metadata about the event. These metadata can include the Amazon service that is the source of the event, the time the event was generated, the account and Region in which the event took place, and others. For definitions of these general fields, see [Event structure reference](#) in the *Amazon EventBridge User Guide*.

In addition, each event has a `detail` field that contains data specific to that particular event. The following reference defines the detail fields for the various Transfer Family events.

When you use EventBridge to select and manage Transfer Family events, consider the following:

- The `source` field for all events from Transfer Family is set to `aws.transfer`.
- The `detail-type` field specifies the event type.

For example, `FTP Server File Download Completed`.

- The `detail` field contains the data that is specific to that particular event.

For information on constructing event patterns that enable rules to match Transfer Family events, see [Event patterns](#) in the *Amazon EventBridge User Guide*.

For more information on events and how EventBridge processes them, see [Amazon EventBridge events](#) in the *Amazon EventBridge User Guide*.

Topics

- [SFTP, FTPS, and FTP server events](#)
- [SFTP connector events](#)
- [AS2 events](#)

SFTP, FTPS, and FTP server events

The following are the detail fields for SFTP, FTPS, and FTP server events:

- FTP Server File Download Completed
- FTP Server File Download Failed
- FTP Server File Upload Completed
- FTP Server File Upload Failed
- FTPS Server File Download Completed
- FTPS Server File Download Failed
- FTPS Server File Upload Completed
- FTPS Server File Upload Failed
- SFTP Server File Download Completed
- SFTP Server File Download Failed
- SFTP Server File Upload Completed
- SFTP Server File Upload Failed

The `source` and `detail-type` fields are included below because they contain specific values for Transfer Family events. For definitions of the other metadata fields that are included in all events, see [Event structure reference](#) in the *Amazon EventBridge User Guide*.

```
{
  . . . ,
  "detail-type": "string",
  "source": "aws.transfer",
  . . . ,
  "detail": {
    "failure-code" : "string",
    "status-code" : "string",
```



```
"protocol" : "string",
"bytes" : "number",
"client-ip" : "string",
"failure-message" : "string",
"end-timestamp" : "string",
"etag" : "string",
"file-path" : "string",
"server-id" : "string",
"username" : "string",
"session-id" : "string",
"start-timestamp" : "string"
}
}
```

detail-type

Identifies the type of event.

For this event, the value is one of the SFTP, FTPS, or FTP server event names listed previously.

source

Identifies the service that generated the event. For Transfer Family events, this value is `aws.transfer`.

detail

A JSON object that contains information about the event. The service generating the event determines the content of this field.

For this event, the data includes the following:

failure-code

Category for why the transfer failed. Values: `PARTIAL_UPLOAD` | `PARTIAL_DOWNLOAD` | `UNKNOWN_ERROR`

status-code

Whether the transfer is successful. Values: `COMPLETED` | `FAILED`.

protocol

The protocol used for the transfer. Values: `SFTP` | `FTPS` | `FTP`

`bytes`

The number of bytes transferred.

`client-ip`

The IP address for the client involved in the transfer

`failure-message`

For failed transfers, the details for why the transfer failed.

`end-timestamp`

For successful transfers, the timestamp for when the file finishes being processed.

`etag`

The entity tag (only used for Amazon S3 files).

`file-path`

The path to the file being transferred.

`server-id`

The unique ID for the Transfer Family server.

`username`

The user that is performing the transfer.

`session-id`

The unique identifier for the transfer session.

`start-timestamp`

For successful transfers, the timestamp for when file processing begins.

Example SFTP Server File Download Failed example event

The following example shows an event where a download failed on an SFTP server (Amazon EFS is the storage being used).

```
{
```

```
"version": "0",
"id": "event-ID",
"detail-type": "SFTP Server File Download Failed",
"source": "aws.transfer",
"account": "958412138249",
"time": "2024-01-29T17:20:27Z",
"region": "us-east-1",
"resources": [
  "arn:aws:transfer:us-east-1:958412138249:server/s-1234abcd5678efghi"
],
"detail": {
  "failure-code": "PARTIAL_DOWNLOAD",
  "status-code": "FAILED",
  "protocol": "SFTP",
  "bytes": 4100,
  "client-ip": "IP-address",
  "failure-message": "File was partially downloaded.",
  "end-timestamp": "2024-01-29T17:20:27.749749117Z",
  "file-path": "/fs-1234abcd5678efghi/user0/test-file",
  "server-id": "s-1234abcd5678efghi",
  "username": "test",
  "session-id": "session-ID",
  "start-timestamp": "2024-01-29T17:20:16.706282454Z"
}
}
```

Example FTP Server File Upload Completed example event

The following example shows an event where an upload completed successfully on an FTP server (Amazon S3 is the storage being used).

```
{
  "version": "0",
  "id": "event-ID",
  "detail-type": "FTP Server File Upload Completed",
  "source": "aws.transfer",
  "account": "958412138249",
  "time": "2024-01-29T16:31:43Z",
  "region": "us-east-1",
  "resources": [
    "arn:aws:transfer:us-east-1:958412138249:server/s-1111aaaa2222bbbb3"
  ],
  "detail": {
```

```
    "status-code": "COMPLETED",
    "protocol": "FTP",
    "bytes": 1048576,
    "client-ip": "10.0.0.141",
    "end-timestamp": "2024-01-29T16:31:43.311866408Z",
    "etag": "b6d81b360a5672d80c27430f39153e2c",
    "file-path": "/amzn-s3-demo-bucket/test/1mb_file",
    "server-id": "s-1111aaaa2222bbbb3",
    "username": "test",
    "session-id": "event-ID",
    "start-timestamp": "2024-01-29T16:31:42.462088327Z"
  }
}
```

SFTP connector events

The following are the detail fields for SFTP connector events:

- SFTP Connector File Send Completed
- SFTP Connector File Send Failed
- SFTP Connector File Retrieve Completed
- SFTP Connector File Retrieve Failed
- SFTP Connector Directory Listing Completed
- SFTP Connector Directory Listing Failed
- SFTP Connector Remote Move Completed
- SFTP Connector Remote Move Failed
- SFTP Connector Remote Delete Completed
- SFTP Connector Remote Delete Failed

The `source` and `detail-type` fields are included below because they contain specific values for Transfer Family events. For definitions of the other metadata fields that are included in all events, see [Event structure reference](#) in the *Amazon EventBridge User Guide*.

```
{
  . . . ,
  "detail-type": "string",
  "source": "aws.transfer",
}
```

```

. . . ,
"detail": {
  "operation" : "string",
  "max-items" : "number",
  "connector-id" : "string",
  "output-directory-path" : "string",
  "listing-id" : "string",
  "transfer-id" : "string",
  "file-transfer-id" : "string",
  "url" : "string",
  "file-path" : "string",
  "status-code" : "string",
  "failure-code" : "string",
  "failure-message" : "string",
  "start-timestamp" : "string",
  "end-timestamp" : "string",
  "local-directory-path" : "string",
  "remote-directory-path" : "string"
  "item-count" : "number"
  "truncated" : "boolean"
  "bytes" : "number",
  "local-file-location" : {
    "domain" : "string",
    "bucket" : "string",
    "key" : "string"
  },
  "output-file-location" : {
    "domain" : "string",
    "bucket" : "string",
    "key" : "string"
  }
}
}
}

```

detail-type

Identifies the type of event.

For this event, the value is one of the SFTP connector event names listed previously.

source

Identifies the service that generated the event. For Transfer Family events, this value is `aws.transfer`.

detail

A JSON object that contains information about the event. The service that generates the event determines the content of this field.

For this event, the data includes the following:

max-items

The maximum number of directory/file names to return.

operation

Whether the `StartFileTransfer` request is sending or retrieving a file. Values: SEND | RETRIEVE.

connector-id

The unique identifier for the SFTP connector being used.

output-directory-path

The path (bucket and prefix) in Amazon S3 to store the results of the file/directory listing.

listing-id

A unique identifier for the `StartDirectoryListing` API operation. This identifier can be used to check CloudWatch logs to see the status of listing request.

transfer-id

The unique identifier for the transfer event (a `StartFileTransfer` request).

file-transfer-id

The unique identifier for the file being transferred.

url

The URL of the partner's AS2 or SFTP endpoint.

file-path

The location and file that is being sent or retrieved.

status-code

Whether the transfer is successful. Values: FAILED | COMPLETED.

failure-code

For failed transfers, the reason code for why the transfer failed.

failure-message

For failed transfers, the details for why the transfer failed.

start-timestamp

For successful transfers, the timestamp for when file processing begins.

end-timestamp

For successful transfers, the timestamp for when file processing completes.

local-directory-path

For RETRIEVE requests, the location in which to place the retrieved file.

remote-directory-path

For SEND requests, the file directory in which to place the file on the partner's SFTP server. This is the value for the `RemoteDirectoryPath` that the user passed to the `StartFileTransfer` request. You can specify a default directory on the partner's SFTP server. If so, this field is empty.

item-count

The number of items (directories and files) returned for the listing request.

truncated

Whether the list output contains all of the items contained in the remote directory or not.

bytes

The number of bytes being transferred. The value is 0 for failed transfers.

local-file-location

This parameter contains the details of the location of the Amazon storage file.

domain

The storage being used. Currently, the only value is S3.

bucket

The container for the object in Amazon S3.

key

The name assigned to the object in Amazon S3.

output-file-location

This parameter contains the details of the location for where to store the results of the directory listing in Amazon storage.

domain

The storage being used. Currently, the only value is S3.

bucket

The container for the object in Amazon S3.

key

The name assigned to the object in Amazon S3.

Example SFTP Connector File Send Failed example event

The following example shows an event where an SFTP connector failed while trying to send a file to a remote SFTP server.

```
{
  "version": "0",
  "id": "event-ID",
  "detail-type": "SFTP Connector File Send Failed",
  "source": "aws.transfer",
  "account": "123456789012",
  "time": "2024-01-24T19:30:45Z",
  "region": "us-east-1",
  "resources": [
    "arn:aws:transfer:us-east-1:123456789012:connector/c-f1111aaaa2222bbbb3"
  ],
  "detail": {
    "operation": "SEND",
    "connector-id": "c-f1111aaaa2222bbbb3",
```



```

    "transfer-id": "transfer-ID",
    "file-transfer-id": "file-transfer-ID",
    "url": "sftp://s-21a23456789012a.server.transfer.us-east-1.amazonaws.com",
    "file-path": "/amzn-s3-demo-bucket/testfile.txt",
    "status-code": "FAILED",
    "failure-code": "CONNECTION_ERROR",
    "failure-message": "Unknown Host",
    "remote-directory-path": "",
    "bytes": 0,
    "start-timestamp": "2024-01-24T18:29:33.658729Z",
    "end-timestamp": "2024-01-24T18:29:33.993196Z",
    "local-file-location": {
      "domain": "S3",
      "bucket": "amzn-s3-demo-bucket",
      "key": "testfile.txt"
    }
  }
}

```

Example SFTP Connector File Retrieve Completed example event

The following example shows an event where an SFTP connector successfully retrieved a file sent from a remote SFTP server.

```

{
  "version": "0",
  "id": "event-ID",
  "detail-type": "SFTP Connector File Retrieve Completed",
  "source": "aws.transfer",
  "account": "123456789012",
  "time": "2024-01-24T18:28:08Z",
  "region": "us-east-1",
  "resources": [
    "arn:aws:transfer:us-east-1:123456789012:connector/c-f1111aaaa2222bbbb3"
  ],
  "detail": {
    "operation": "RETRIEVE",
    "connector-id": "c-fc68000012345aa18",
    "transfer-id": "file-transfer-ID",
    "file-transfer-id": "file-transfer-ID",
    "url": "sftp://s-21a23456789012a.server.transfer.us-east-1.amazonaws.com",
    "file-path": "testfile.txt",
    "status-code": "COMPLETED",
  }
}

```

```

    "local-directory-path": "/amzn-s3-demo-bucket",
    "bytes": 63533,
    "start-timestamp": "2024-01-24T18:28:07.632388Z",
    "end-timestamp": "2024-01-24T18:28:07.774898Z",
    "local-file-location": {
      "domain": "S3",
      "bucket": "amzn-s3-demo-bucket",
      "key": "testfile.txt"
    }
  }
}

```

Example SFTP Connector Directory Listing Completed example event

The following example shows an event where a start directory listing call retrieved a listing file from a remote SFTP server.

```

{
  "version": "0",
  "id": "event-ID",
  "detail-type": "SFTP Connector Directory Listing Completed",
  "source": "aws.transfer",
  "account": "123456789012",
  "time": "2024-01-24T18:28:08Z",
  "region": "us-east-1",
  "resources": [
    "arn:aws:transfer:us-east-1:123456789012:connector/c-f1111aaaa2222bbbb3"
  ],
  "detail": {
    "max-items": 10000,
    "connector-id": "c-fc68000012345aa18",
    "output-directory-path": "/amzn-s3-demo-bucket/example/file-listing-output",
    "listing-id": "123456-23aa-7980-abc1-1a2b3c4d5e",
    "url": "sftp://s-21a23456789012a.server.transfer.us-east-1.amazonaws.com",

    "status-code": "COMPLETED",
    "remote-directory-path": "/home",
    "item-count": 10000,
    "truncated": true,
    "start-timestamp": "2024-01-24T18:28:07.632388Z",
    "end-timestamp": "2024-01-24T18:28:07.774898Z",
    "output-file-location": {
      "domain": "S3",

```

```
        "bucket": "amzn-s3-demo-bucket",
        "key": "c-fc1ab90fd0d047e7a-70987273-49nn-4006-bab1-1a7290cc412ba.json"
    }
}
```

AS2 events

The following are the detail fields for AS2 events:

- AS2 Payload Receive Completed
- AS2 Payload Receive Failed
- AS2 Payload Send Completed
- AS2 Payload Send Failed
- AS2 MDN Receive Completed
- AS2 MDN Receive Failed
- AS2 MDN Send Completed
- AS2 MDN Send Failed

The source and detail-type fields are included below because they contain specific values for Transfer Family events. For definitions of the other metadata fields that are included in all events, see [Event structure reference](#) in the *Amazon EventBridge User Guide*.

```
{
    . . . ,
    "detail-type": "string",
    "source": "aws.transfer",
    . . . ,
    "detail": {
        "s3-attributes" : {
            "file-bucket" : "string",
            "file-key" : "string",
            "json-bucket" : "string",
            "json-key" : "string",
            "mdn-bucket" : "string",
            "mdn-key" : "string"
        }
        "mdn-subject" : "string",
    }
}
```

```
"mdn-message-id" : "string",
"disposition" : "string",
"bytes" : "number",
"as2-from" : "string",
"as2-message-id" : "string",
"as2-to" : "string",
"connector-id" : "string",
"client-ip" : "string",
"agreement-id" : "string",
"server-id" : "string",
"requester-file-name" : "string",
"message-subject" : "string",
"start-timestamp" : "string",
"end-timestamp" : "string",
"status-code" : "string",
"failure-code" : "string",
"failure-message" : "string",
"transfer-id" : "string"
}
}
```

detail-type

Identifies the type of event.

For this event, the value is one of the AS2 events listed previously.

source

Identifies the service that generated the event. For Transfer Family events, this value is `aws.transfer`.

detail

A JSON object that contains information about the event. The service generating the event determines the content of this field.

s3-attributes

Identifies the Amazon S3 bucket and key for the file being transferred. For MDN events, it also identifies the bucket and key for the MDN file.

file-bucket

The container for the object in Amazon S3.

file-key

The name assigned to the object in Amazon S3.

json-bucket

For COMPLETED or FAILED transfers, the container for the JSON file.

json-key

For COMPLETED or FAILED transfers, the name assigned to the JSON file in Amazon S3.

mdn-bucket

For MDN events, the container for the MDN file.

mdn-key

For MDN events, the name assigned to the MDN file in Amazon S3.

mdn-subject

For MDN events, a text description for the message disposition.

mdn-message-id

For MDN events, a unique ID for the MDN message.

disposition

For MDN events, the category for the disposition.

bytes

The number of bytes in the message.

as2-from

The AS2 trading partner that is sending the message.

as2-message-id

A unique identifier for the AS2 message being transferred.

as2-to

The AS2 trading partner that is receiving the message.

connector-id

For AS2 messages being sent from a Transfer Family server to a trading partner, the unique identifier for the AS2 connector being used.

client-ip

For server events (transfers from a trading partner to a Transfer Family server), the IP address for the client involved in the transfer.

agreement-id

For server events, the unique identifier for the AS2 agreement.

server-id

For server events, a unique ID only for the Transfer Family server.

requester-file-name

For payload events, the original name for the file received during the transfer.

message-subject

A text description for the subject of the message.

start-timestamp

For successful transfers, the timestamp for when file processing begins.

end-timestamp

For successful transfers, the timestamp for when file processing completes.

status-code

The code that corresponds to the state of the AS2 message transfer process. Valid values: COMPLETED | FAILED | PROCESSING.

failure-code

For failed transfers, the category for why the transfer failed.

failure-message

For failed transfers, the details for why the transfer failed.

transfer-id

The unique identifier for the transfer event.

Example AS2 Payload Receive Completed example event

```
{
  "version": "0",
  "id": "event-ID",
  "detail-type": "AS2 Payload Receive Completed",
  "source": "aws.transfer",
  "account": "076722215406",
  "time": "2024-02-07T06:47:05Z",
  "region": "us-east-1",
  "resources": ["arn:aws:transfer:us-east-1:076722215406:connector/
c-1111aaaa2222bbbb3"],
  "detail": {
    "s3-attributes": {
      "file-key": "/inbound/processed/testAs2Message.dat",
      "file-bucket": "amzn-s3-demo-bucket"
    },
    "client-ip": "client-IP-address",
    "requester-file-name": "testAs2MessageVerifyFile.dat",
    "end-timestamp": "2024-02-07T06:47:06.040031Z",
    "as2-from": "as2-from-ID",
    "as2-message-id": "as2-message-ID",
    "message-subject": "Message from AS2 tests",
    "start-timestamp": "2024-02-07T06:47:05.410Z",
    "status-code": "PROCESSING",
    "bytes": 63,
    "as2-to": "as2-to-ID",
    "agreement-id": "a-1111aaaa2222bbbb3",
    "server-id": "s-1234abcd5678efghi"
  }
}
```

Example AS2 MDN Receive Failed example event

```
{
  "version": "0",
  "id": "event-ID",
  "detail-type": "AS2 MDN Receive Failed",
  "source": "aws.transfer",
  "account": "889901007463",
  "time": "2024-02-06T22:05:09Z",
  "region": "us-east-1",
  "resources": ["arn:aws:transfer:us-east-1:076722215406:server/s-1111aaaa2222bbbb3"],
```

```
"detail": {
  "mdn-subject": "Your Requested MDN Response re: Test run from Id 123456789abcde
to partner ijklmnop987654",
  "s3-attributes": {
    "json-bucket": "amzn-s3-demo-bucket1",
    "file-key": "/as2Integ/TestOutboundWrongCert.dat",
    "file-bucket": "amzn-s3-demo-bucket2",
    "json-key": "/as2Integ/failed/TestOutboundWrongCert.dat.json"
  },
  "mdn-message-id": "MDN-message-ID",
  "end-timestamp": "2024-02-06T22:05:09.479878Z",
  "as2-from": "PartnerA",
  "as2-message-id": "as2-message-ID",
  "connector-id": "c-1234abcd5678efghj",
  "message-subject": "Test run from Id 123456789abcde to partner ijklmnop987654",
  "start-timestamp": "2024-02-06T22:05:03Z",
  "failure-code": "VERIFICATION_FAILED_NO_MATCHING_KEY_FOUND",
  "status-code": "FAILED",
  "as2-to": "MyCompany",
  "failure-message": "No public certificate matching message signature could be
found in profile: p-1234abcd5678efghj",
  "transfer-id": "transfer-ID"
}
}
```


Security in Amazon Transfer Family

Cloud security at Amazon is the highest priority. As an Amazon customer, you benefit from a data center and network architecture that is built to meet the requirements of the most security-sensitive organizations.

Security is a shared responsibility between Amazon and you. The [shared responsibility model](#) describes this as security *of* the cloud and security *in* the cloud:

To learn whether an Amazon Web Services service is within the scope of specific compliance programs, see [Amazon Web Services services in Scope by Compliance Program](#) and choose the compliance program that you are interested in. For general information, see [Amazon Web Services Compliance Programs](#).

You can download third-party audit reports using Amazon Artifact. For more information, see [Downloading Reports in Amazon Artifact](#).

Your compliance responsibility when using Amazon Web Services services is determined by the sensitivity of your data, your company's compliance objectives, and applicable laws and regulations. Amazon provides the following resources to help with compliance:

- [Security & Compliance](#) – These solution implementation guides discuss architectural considerations and provide steps for deploying security and compliance features.
- [Amazon Compliance Resources](#) – This collection of workbooks and guides might apply to your industry and location.
- [Evaluating Resources with Rules](#) in the *Amazon Config Developer Guide* – The Amazon Config service assesses how well your resource configurations comply with internal practices, industry guidelines, and regulations.
- [Amazon Security Hub](#) – This Amazon Web Services service provides a comprehensive view of your security state within Amazon. Security Hub uses security controls to evaluate your Amazon resources and to check your compliance against security industry standards and best practices. For a list of supported services and controls, see [Security Hub controls reference](#).
- [Amazon GuardDuty](#) – This Amazon Web Services service detects potential threats to your Amazon Web Services accounts, workloads, containers, and data by monitoring your environment for suspicious and malicious activities. GuardDuty can help you address various compliance requirements, like PCI DSS, by meeting intrusion detection requirements mandated by certain compliance frameworks.

This documentation helps you understand how to apply the shared responsibility model when using Amazon Transfer Family. The following topics show you how to configure Amazon Transfer Family to meet your security and compliance objectives. You also learn how to use other Amazon services that help you to monitor and secure your Amazon Transfer Family resources.

We offer a workshop that provides prescriptive guidance and a hands on lab on how you can build a scalable and secure file transfer architecture on Amazon without needing to modify existing applications or manage server infrastructure. You can view the details for this workshop [here](#).

Topics

- [Security policies for Amazon Transfer Family servers](#)
- [Security policies for Amazon Transfer Family SFTP connectors](#)
- [Using hybrid post-quantum key exchange with Amazon Transfer Family](#)
- [Data protection and encryption](#)
- [Managing SSH and PGP keys in Transfer Family](#)
- [Identity and access management for Amazon Transfer Family](#)
- [Compliance validation for Amazon Transfer Family](#)
- [Resilience in Amazon Transfer Family](#)
- [Infrastructure security in Amazon Transfer Family](#)
- [Add a web application firewall](#)
- [Cross-service confused deputy prevention](#)
- [Amazon managed policies for Amazon Transfer Family](#)

Security policies for Amazon Transfer Family servers

Server security policies in Amazon Transfer Family allow you to limit the set of cryptographic algorithms (message authentication codes (MACs), key exchanges (KEXs), and cipher suites) associated with your server. For a list of supported cryptographic algorithms, see [Cryptographic algorithms](#). For a list of supported key algorithms for use with server host keys and service-managed user keys, see [Managing SSH and PGP keys in Transfer Family](#).

Note

We strongly recommend updating your servers to our latest security policy.

- `TransferSecurityPolicy-2024-01` is the default security policy attached to your server when creating a server using the console, API, or CLI.
- If you create a Transfer Family server using CloudFormation and accept the default security policy, the server is assigned `TransferSecurityPolicy-2018-11`.

If you are concerned about client compatibility, please affirmatively state which security policy you wish to use when creating or updating a server rather than using the default policy, which is subject to change. To change the security policy for a server, see [Edit the security policy](#).

For more information on security in Transfer Family, see the following blog posts:

- [Six tips to improve the security of your Amazon Transfer Family server](#)
- [How Transfer Family can help you build a secure, compliant managed file transfer solution](#)

Topics

- [Cryptographic algorithms](#)
- [TransferSecurityPolicy-2024-01](#)
- [TransferSecurityPolicy-SshAuditCompliant-2025-02](#)
- [TransferSecurityPolicy-2023-05](#)
- [TransferSecurityPolicy-2022-03](#)
- [TransferSecurityPolicy-2020-06 and TransferSecurityPolicy-Restricted-2020-06](#)
- [TransferSecurityPolicy-2018-11 and TransferSecurityPolicy-Restricted-2018-11](#)
- [TransferSecurityPolicy-FIPS-2024-01/TransferSecurityPolicy-FIPS-2024-05](#)
- [TransferSecurityPolicy-FIPS-2023-05](#)
- [TransferSecurityPolicy-FIPS-2020-06](#)
- [Post Quantum security policies](#)

Cryptographic algorithms

For host keys, we support the following algorithms:

- `rsa-sha2-256`
- `rsa-sha2-512`
- `ecdsa-sha2-nistp256`
- `ecdsa-sha2-nistp384`
- `ecdsa-sha2-nistp521`
- `ssh-ed25519`

Additionally, the following security policies allow `ssh-rsa`:

- `TransferSecurityPolicy-2018-11`
- `TransferSecurityPolicy-2020-06`
- `TransferSecurityPolicy-FIPS-2020-06`
- `TransferSecurityPolicy-FIPS-2023-05`
- `TransferSecurityPolicy-FIPS-2024-01`
- `TransferSecurityPolicy-PQ-SSH-FIPS-Experimental-2023-04`

 **Note**

It is important to understand the distinction between the RSA key type—which is always `ssh-rsa`—and the RSA host key algorithm, which can be any of the supported algorithms.

The following is a list of supported cryptographic algorithms for each security policy.

 **Note**

In the following table and policies, note the following use of algorithm types.

- SFTP servers only use algorithms in the **SshCiphers**, **SshKexs**, and **SshMacs** sections.
- FTPS servers only use algorithms in the **TlsCiphers** section.
- FTP servers, since they don't use encryption, do not use any of these algorithms.
- The FIPS-2024-05 and FIPS-2024-01 security policies are identical, except that FIPS-2024-05 doesn't support the `ssh-rsa` algorithm.

- Transfer Family has introduced new restricted policies that closely parallel existing policies:
 - The TransferSecurityPolicy-Restricted-2018-11 and TransferSecurityPolicy-2018-11 security policies are identical, except that the restricted policy doesn't support the `chacha20-poly1305@openssh.com` cipher.
 - The TransferSecurityPolicy-Restricted-2020-06 and TransferSecurityPolicy-2020-06 security policies are identical, except that the restricted policy doesn't support the `chacha20-poly1305@openssh.com` cipher.

* In the following table, the `chacha20-poly1305@openssh.com` cipher is included in the non-restricted policy only,

Security policy	2024-01	SshAuditCompliant-2025-02	2023-05	2022-03	2020-06	FIPS-2020-06	FIPS-2020-05	FIPS-2020-05	FIPS-2020-06	2018-11
					restricted	restricted	restricted	restricted	restricted	restricted

SshCiphers

aes128-ctr	◆	◆			◆	◆			◆	◆
aes128-gcm@openssh.com	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
aes192-ctr	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
aes256-ctr	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
aes256-gcm	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆

Security policy	2024-01	SshAudit compliant- 2025-02	2023-05	2022-03	2020-06 2020-06 restrict d	FIPS-2024 -05 FIPS-2024 -01	FIPS-2024 -05	FIPS-2024 -06	2018-11 2018-11 restrict d
-----------------	---------	-----------------------------------	---------	---------	-------------------------------------	--------------------------------------	------------------	------------------	-------------------------------------

m@openssh.com

chacha20-poly1305@openssh.com

◆*

◆*

SshKexs

curve25519-sha256

◆

◆

◆

◆

curve25519-sha256@libssh.org

◆

◆

◆

◆

diffie-hellman-group14-sha1

◆

Security policy	2024-01	SshAudit compliant- 2025-02	2023-05	2022-03	2020-06 2020-06 restrict ed	FIPS-2024 -05 FIPS-2024 -01	FIPS-2023 -05	FIPS-2020 -06	2018-11 2018-11 restrict ed
diffie-he llman- gro up14- sha2 56					◆			◆	◆
diffie-he llman- gro up16- sha5 12	◆	◆	◆	◆	◆	◆	◆	◆	◆
diffie-he llman- gro up18- sha5 12	◆	◆	◆	◆	◆	◆	◆	◆	◆
diffie-he llman- group- exchan ge- sha256	◆	◆	◆	◆	◆		◆	◆	◆

Security policy	2024-01	SshAudit compliant- 2025-02	2023-05	2022-03	2020-06 2020-06 restrict ed	FIPS-2024 -05 FIPS-2024 -01	FIPS-2023 -05	FIPS-2020 -06	2018-11 2018-11 restrict ed
ecdh- sha2- nistp256	◆				◆	◆		◆	◆
ecdh- sha2- nistp384	◆				◆	◆		◆	◆
ecdh- sha2- nistp521	◆				◆	◆		◆	◆
SshMacs									
hmac- sha1									◆
hmac- sha1- etm@open ssh.com									◆
hmac- sha2 -256				◆	◆			◆	◆
hmac- sha2 -256- etm@ openssh.c om	◆	◆	◆	◆	◆	◆	◆	◆	◆

Security policy	2024-01	SshAudit compliant-2025-02	2023-05	2022-03	2020-06 2020-06 restricted	FIPS-2024-05 FIPS-2024-01	FIPS-2024-05	FIPS-2024-06	2018-11 2018-11 restricted
-----------------	---------	----------------------------	---------	---------	----------------------------------	------------------------------	--------------	--------------	----------------------------------

hmac-sha2-512



hmac-sha2-512-etm@openssh.com



umac-128-etm@openssh.com



umac-128@openssh.com



umac-64-etm@openssh.com



umac-64@openssh.com



TlsCiphers

Security policy	2024-01	SshAudit compliant-2025-02	2023-05	2022-03	2020-06	FIPS-2020-05	FIPS-2020-05	FIPS-2020-06	2018-11
					2020-06 restricted	FIPS-2024-01			2018-11 restricted
TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256	◆	◆	◆	◆	◆	◆	◆	◆	◆
TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256	◆	◆	◆	◆	◆	◆	◆	◆	◆
TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384	◆	◆	◆	◆	◆	◆	◆	◆	◆
TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384	◆	◆	◆	◆	◆	◆	◆	◆	◆
TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256	◆	◆	◆	◆	◆	◆	◆	◆	◆

Security policy	2024-01	SshAudit-compliant-2025-02	2023-05	2022-03	2020-06	FIPS-2020-06	FIPS-2020-05	FIPS-2020-05	FIPS-2020-06	2018-11
					2020-06 restricted	FIPS-2020-01				2018-11 restricted
TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
TLS_RSA_WITH_AES_128_CBC_SHA256										◆
TLS_RSA_WITH_AES_256_CBC_SHA256										◆

TransferSecurityPolicy-2024-01

The following shows the TransferSecurityPolicy-2024-01 security policy.

```
{
  "SecurityPolicy": {
    "Fips": false,
    "SecurityPolicyName": "TransferSecurityPolicy-2024-01",
    "SshCiphers": [
      "aes128-gcm@openssh.com",
      "aes256-gcm@openssh.com",
      "aes128-ctr",
      "aes256-ctr",
      "aes192-ctr"
    ],
    "SshKexs": [
      "ecdh-sha2-nistp256",
      "ecdh-sha2-nistp384",
      "ecdh-sha2-nistp521",
      "curve25519-sha256",
      "curve25519-sha256@libssh.org",
      "diffie-hellman-group18-sha512",
      "diffie-hellman-group16-sha512",
      "diffie-hellman-group-exchange-sha256"
    ],
    "SshMacs": [
      "hmac-sha2-256-etm@openssh.com",
      "hmac-sha2-512-etm@openssh.com"
    ],
    "TlsCiphers": [
      "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"
    ]
  }
}
```

TransferSecurityPolicy-SshAuditCompliant-2025-02

The following shows the TransferSecurityPolicy-SshAuditCompliant-2025-02 security policy.

Note

This security policy is designed around the recommendations provided by the `ssh-audit` tool, and is 100% compliant with that tool.

```
{
  "SecurityPolicy": {
    "Fips": false,
    "Protocols": [
      "SFTP",
      "FTPS"
    ],
    "SecurityPolicyName": "TransferSecurityPolicy-SshAuditCompliant-2025-02",
    "SshCiphers": [
      "aes128-gcm@openssh.com",
      "aes256-gcm@openssh.com",
      "aes128-ctr",
      "aes256-ctr",
      "aes192-ctr"
    ],
    "SshKexs": [
      "curve25519-sha256",
      "curve25519-sha256@libssh.org",
      "diffie-hellman-group18-sha512",
      "diffie-hellman-group16-sha512",
      "diffie-hellman-group-exchange-sha256"
    ],
    "SshMacs": [
      "hmac-sha2-256-etm@openssh.com",
      "hmac-sha2-512-etm@openssh.com"
    ],
    "TlsCiphers": [
      "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"
    ]
  },
}
```

```
"Type": "SERVER"  
}  
}
```

TransferSecurityPolicy-2023-05

The following shows the TransferSecurityPolicy-2023-05 security policy.

```
{  
  "SecurityPolicy": {  
    "Fips": false,  
    "SecurityPolicyName": "TransferSecurityPolicy-2023-05",  
    "SshCiphers": [  
      "aes256-gcm@openssh.com",  
      "aes128-gcm@openssh.com",  
      "aes256-ctr",  
      "aes192-ctr"  
    ],  
    "SshKexs": [  
      "curve25519-sha256",  
      "curve25519-sha256@libssh.org",  
      "diffie-hellman-group16-sha512",  
      "diffie-hellman-group18-sha512",  
      "diffie-hellman-group-exchange-sha256"  
    ],  
    "SshMacs": [  
      "hmac-sha2-512-etm@openssh.com",  
      "hmac-sha2-256-etm@openssh.com"  
    ],  
    "TlsCiphers": [  
      "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",  
      "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",  
      "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",  
      "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",  
      "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",  
      "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",  
      "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",  
      "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"  
    ]  
  }  
}
```

TransferSecurityPolicy-2022-03

The following shows the TransferSecurityPolicy-2022-03 security policy.

```
{
  "SecurityPolicy": {
    "Fips": false,
    "SecurityPolicyName": "TransferSecurityPolicy-2022-03",
    "SshCiphers": [
      "aes256-gcm@openssh.com",
      "aes128-gcm@openssh.com",
      "aes256-ctr",
      "aes192-ctr"
    ],
    "SshKexs": [
      "curve25519-sha256",
      "curve25519-sha256@libssh.org",
      "diffie-hellman-group16-sha512",
      "diffie-hellman-group18-sha512",
      "diffie-hellman-group-exchange-sha256"
    ],
    "SshMacs": [
      "hmac-sha2-512-etm@openssh.com",
      "hmac-sha2-256-etm@openssh.com",
      "hmac-sha2-512",
      "hmac-sha2-256"
    ],
    "TlsCiphers": [
      "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"
    ]
  }
}
```

TransferSecurityPolicy-2020-06 and TransferSecurityPolicy-Restricted-2020-06

The following shows the TransferSecurityPolicy-2020-06 security policy.

Note

The TransferSecurityPolicy-Restricted-2020-06 and TransferSecurityPolicy-2020-06 security policies are identical, except that the restricted policy doesn't support the `chacha20-poly1305@openssh.com` cipher.

```
{
  "SecurityPolicy": {
    "Fips": false,
    "SecurityPolicyName": "TransferSecurityPolicy-2020-06",
    "SshCiphers": [
      "chacha20-poly1305@openssh.com", //Not included in TransferSecurityPolicy-
Restricted-2020-06
      "aes128-ctr",
      "aes192-ctr",
      "aes256-ctr",
      "aes128-gcm@openssh.com",
      "aes256-gcm@openssh.com"
    ],
    "SshKexs": [
      "ecdh-sha2-nistp256",
      "ecdh-sha2-nistp384",
      "ecdh-sha2-nistp521",
      "diffie-hellman-group-exchange-sha256",
      "diffie-hellman-group16-sha512",
      "diffie-hellman-group18-sha512",
      "diffie-hellman-group14-sha256"
    ],
    "SshMacs": [
      "umac-128-etm@openssh.com",
      "hmac-sha2-256-etm@openssh.com",
      "hmac-sha2-512-etm@openssh.com",
      "umac-128@openssh.com",
      "hmac-sha2-256",
      "hmac-sha2-512"
    ]
  }
}
```



```

    ],
    "TlsCiphers": [
      "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"
    ]
  }
}

```

TransferSecurityPolicy-2018-11 and TransferSecurityPolicy-Restricted-2018-11

The following shows the TransferSecurityPolicy-2018-11 security policy.

Note

The TransferSecurityPolicy-Restricted-2018-11 and TransferSecurityPolicy-2018-11 security policies are identical, except that the restricted policy doesn't support the `chacha20-poly1305@openssh.com` cipher.

```

{
  "SecurityPolicy": {
    "Fips": false,
    "SecurityPolicyName": "TransferSecurityPolicy-2018-11",
    "SshCiphers": [
      "chacha20-poly1305@openssh.com", //Not included in TransferSecurityPolicy-
Restricted-2018-11
      "aes128-ctr",
      "aes192-ctr",
      "aes256-ctr",
      "aes128-gcm@openssh.com",
      "aes256-gcm@openssh.com"
    ],
    "SshKexs": [
      "curve25519-sha256",

```

```

    "curve25519-sha256@libssh.org",
    "ecdh-sha2-nistp256",
    "ecdh-sha2-nistp384",
    "ecdh-sha2-nistp521",
    "diffie-hellman-group-exchange-sha256",
    "diffie-hellman-group16-sha512",
    "diffie-hellman-group18-sha512",
    "diffie-hellman-group14-sha256",
    "diffie-hellman-group14-sha1"
  ],
  "SshMacs": [
    "umac-64-etm@openssh.com",
    "umac-128-etm@openssh.com",
    "hmac-sha2-256-etm@openssh.com",
    "hmac-sha2-512-etm@openssh.com",
    "hmac-sha1-etm@openssh.com",
    "umac-64@openssh.com",
    "umac-128@openssh.com",
    "hmac-sha2-256",
    "hmac-sha2-512",
    "hmac-sha1"
  ],
  "TlsCiphers": [
    "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",
    "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",
    "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",
    "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",
    "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",
    "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",
    "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",
    "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384",
    "TLS_RSA_WITH_AES_128_CBC_SHA256",
    "TLS_RSA_WITH_AES_256_CBC_SHA256"
  ]
}
}

```

TransferSecurityPolicy-FIPS-2024-01/TransferSecurityPolicy-FIPS-2024-05

The following shows the TransferSecurityPolicy-FIPS-2024-01 and TransferSecurityPolicy-FIPS-2024-05 security policies.

Note

The FIPS service endpoint and TransferSecurityPolicy-FIPS-2024-01 and TransferSecurityPolicy-FIPS-2024-05 security policies are only available in some Amazon Regions. For more information, see [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*.

The only difference between these two security policies is that TransferSecurityPolicy-FIPS-2024-01 supports the `ssh-rsa` algorithm, and TransferSecurityPolicy-FIPS-2024-05 doesn't.

```
{
  "SecurityPolicy": {
    "Fips": true,
    "SecurityPolicyName": "TransferSecurityPolicy-FIPS-2024-01",
    "SshCiphers": [
      "aes128-gcm@openssh.com",
      "aes256-gcm@openssh.com",
      "aes128-ctr",
      "aes256-ctr",
      "aes192-ctr"
    ],
    "SshKexs": [
      "ecdh-sha2-nistp256",
      "ecdh-sha2-nistp384",
      "ecdh-sha2-nistp521",
      "diffie-hellman-group18-sha512",
      "diffie-hellman-group16-sha512",
      "diffie-hellman-group-exchange-sha256"
    ],
    "SshMacs": [
      "hmac-sha2-256-etm@openssh.com",
      "hmac-sha2-512-etm@openssh.com"
    ],
    "TlsCiphers": [
      "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",

```

```

        "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",
        "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"
    ]
}
}

```

TransferSecurityPolicy-FIPS-2023-05

The FIPS certification details for Amazon Transfer Family can be found at <https://csrc.nist.gov/projects/cryptographic-module-validation-program/validated-modules/search/all>

The following shows the TransferSecurityPolicy-FIPS-2023-05 security policy.

Note

The FIPS service endpoint and TransferSecurityPolicy-FIPS-2023-05 security policy is only available in some Amazon Regions. For more information, see [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*.

```

{
  "SecurityPolicy": {
    "Fips": true,
    "SecurityPolicyName": "TransferSecurityPolicy-FIPS-2023-05",
    "SshCiphers": [
      "aes256-gcm@openssh.com",
      "aes128-gcm@openssh.com",
      "aes256-ctr",
      "aes192-ctr"
    ],
    "SshKexs": [
      "diffie-hellman-group16-sha512",
      "diffie-hellman-group18-sha512",
      "diffie-hellman-group-exchange-sha256"
    ],
    "SshMacs": [
      "hmac-sha2-256-etm@openssh.com",
      "hmac-sha2-512-etm@openssh.com"
    ],
    "TlsCiphers": [
      "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",

```

```

        "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",
        "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",
        "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",
        "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",
        "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",
        "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"
    ]
}
}

```

TransferSecurityPolicy-FIPS-2020-06

The FIPS certification details for Amazon Transfer Family can be found at <https://csrc.nist.gov/projects/cryptographic-module-validation-program/validated-modules/search/all>

The following shows the TransferSecurityPolicy-FIPS-2020-06 security policy.

Note

The FIPS service endpoint and TransferSecurityPolicy-FIPS-2020-06 security policy are only available in some Amazon Regions. For more information, see [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*.

```

{
  "SecurityPolicy": {
    "Fips": true,
    "SecurityPolicyName": "TransferSecurityPolicy-FIPS-2020-06",
    "SshCiphers": [
      "aes128-ctr",
      "aes192-ctr",
      "aes256-ctr",
      "aes128-gcm@openssh.com",
      "aes256-gcm@openssh.com"
    ],
    "SshKexs": [
      "ecdh-sha2-nistp256",
      "ecdh-sha2-nistp384",
      "ecdh-sha2-nistp521",
      "diffie-hellman-group-exchange-sha256",
      "diffie-hellman-group16-sha512",
      "diffie-hellman-group18-sha512",

```

```

    "diffie-hellman-group14-sha256"
  ],
  "SshMacs": [
    "hmac-sha2-256-etm@openssh.com",
    "hmac-sha2-512-etm@openssh.com",
    "hmac-sha2-256",
    "hmac-sha2-512"
  ],
  "TlsCiphers": [
    "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",
    "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",
    "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",
    "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",
    "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",
    "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",
    "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",
    "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"
  ]
}
}
}

```

Post Quantum security policies

This table lists the algorithms for the Transfer Family post quantum security policies. These policies are described in detail in [Using hybrid post-quantum key exchange with Amazon Transfer Family](#).

The policy listings follow the table.

Note

The earlier post quantum policies (**TransferSecurityPolicy-PQ-SSH-Experimental-2023-04** and **TransferSecurityPolicy-PQ-SSH-FIPS-Experimental-2023-04**) are deprecated. We recommend that you use the new policies instead.

Security policy	TransferSecurityPolicy-2025-03	TransferSecurityPolicy-FIPS-2025-03
SSH ciphers		
aes128-ctr	◆	◆

Security policy	TransferSecurityPolicy-2025-03	TransferSecurityPolicy-FIPS-2025-03
aes128-gcm@openssh.com	◆	◆
aes192-ctr	◆	◆
aes256-ctr	◆	◆
aes256-gcm@openssh.com	◆	◆
KEXs		
mlkem768x25519-sha256	◆	◆
mlkem768nistp256-sha256	◆	◆
mlkem1024nistp384-sha384	◆	◆
diffie-hellman-group14-sha256	◆	◆
diffie-hellman-group16-sha512	◆	◆
diffie-hellman-group18-sha512	◆	◆
ecdh-sha2-nistp384	◆	◆
ecdh-sha2-nistp521	◆	◆
ecdh-sha2-nistp256	◆	◆
diffie-hellman-group-exchange-sha256	◆	◆
curve25519-sha256@libssh.org	◆	
curve25519-sha256	◆	

Security policy	TransferSecurityPolicy-2025-03	TransferSecurityPolicy-FIPS-2025-03
MACs		
hmac-sha2-256-etm@openssh.com	◆	◆
hmac-sha2-512-etm@openssh.com	◆	◆
TLS ciphers		
TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256	◆	◆
TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256	◆	◆
TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384	◆	◆
TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384	◆	◆
TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256	◆	◆
TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	◆	◆
TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384	◆	◆
TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	◆	◆

TransferSecurityPolicy-2025-03

The following shows the TransferSecurityPolicy-2025-03 security policy.


```
{
  "SecurityPolicy": {
    "Fips": false,
    "SecurityPolicyName": "TransferSecurityPolicy-2025-03",
    "SshCiphers": [
      "aes256-gcm@openssh.com",
      "aes128-gcm@openssh.com",
      "aes128-ctr",
      "aes256-ctr",
      "aes192-ctr"
    ],
    "SshKexs": [
      "mlkem768x25519-sha256",
      "mlkem768nistp256-sha256",
      "mlkem1024nistp384-sha384",
      "ecdh-sha2-nistp256",
      "ecdh-sha2-nistp384",
      "ecdh-sha2-nistp521",
      "curve25519-sha256",
      "curve25519-sha256@libssh.org",
      "diffie-hellman-group16-sha512",
      "diffie-hellman-group18-sha512",
      "diffie-hellman-group-exchange-sha256"
    ],
    "SshMacs": [
      "hmac-sha2-256-etm@openssh.com",
      "hmac-sha2-512-etm@openssh.com"
    ],
    "TlsCiphers": [
      "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",
      "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",
      "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",
      "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"
    ],
    "Type": "SERVER",
    "Protocols": [
      "SFTP",
      "FTPS"
    ]
  }
}
```

```
}  
}
```

TransferSecurityPolicy-FIPS-2025-03

The following shows the TransferSecurityPolicy-FIPS-2025-03 security policy.

```
{  
  "SecurityPolicy": {  
    "Fips": true,  
    "SecurityPolicyName": "TransferSecurityPolicy-FIPS-2025-03",  
    "SshCiphers": [  
      "aes256-gcm@openssh.com",  
      "aes128-gcm@openssh.com",  
      "aes256-ctr",  
      "aes192-ctr",  
      "aes128-ctr"  
    ],  
    "SshKexs": [  
      "mlkem768x25519-sha256",  
      "mlkem768nistp256-sha256",  
      "mlkem1024nistp384-sha384",  
      "ecdh-sha2-nistp256",  
      "ecdh-sha2-nistp384",  
      "ecdh-sha2-nistp521",  
      "diffie-hellman-group-exchange-sha256",  
      "diffie-hellman-group16-sha512",  
      "diffie-hellman-group18-sha512"  
    ],  
    "SshMacs": [  
      "hmac-sha2-512-etm@openssh.com",  
      "hmac-sha2-256-etm@openssh.com"  
    ],  
    "TlsCiphers": [  
      "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256",  
      "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256",  
      "TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256",  
      "TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256",  
      "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384",  
      "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384",  
      "TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384",  
      "TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384"  
    ],  
  },  
}
```

```

    "Type": "SERVER",
    "Protocols": [
      "SFTP",
      "FTPS"
    ]
  }
}

```

Security policies for Amazon Transfer Family SFTP connectors

SFTP connector security policies in Amazon Transfer Family allow you to limit the set of cryptographic algorithms (message authentication codes (MACs), key exchanges (KEXs), and cipher suites) associated with your SFTP connector. The following is a list of supported cryptographic algorithms for each SFTP connector security policy.

Note

`TransferSFTPConnectorSecurityPolicy-2024-03` is the default security policy that is applied to SFTP connectors.

You can change the security policy for your connector. Select **Connectors** from the Transfer Family left navigation pane, and select your connector. Then select **Edit** in the **Sftp configuration** section. In the **Cryptographic algorithm options** section, choose any available security policy from the dropdown list in the **Security Policy** field.

Security policy	TransferSFTPConnectorSecurityPolicy-FIPS-2024-10	TransferSFTPConnectorSecurityPolicy-2024-03	TransferSFTPConnectorSecurityPolicy-2023-07
-----------------	--	---	---

Ciphers

aes128-ctr			◆
aes128-gcm@openssh.com	◆	◆	◆
aes192-ctr		◆	◆

Security policy	TransferSFTPConnectorSecurityPolicy-FIPS-2024-10	TransferSFTPConnectorSecurityPolicy-2024-03	TransferSFTPConnectorSecurityPolicy-2023-07
aes256-ctr		◆	◆
aes256-gcm@openssh.com	◆	◆	◆
Kexs			
curve25519-sha256		◆	◆
curve25519-sha256@libssh.org		◆	◆
diffie-hellman-group14-sha1			◆
diffie-hellman-group16-sha512		◆	◆
diffie-hellman-group18-sha512		◆	◆
diffie-hellman-group-exchange-sha256		◆	◆
ecdh-sha2-nistp256	◆		
ecdh-sha2-nistp384	◆		
ecdh-sha2-nistp521	◆		
Macs			
hmac-sha2-512-etm@openssh.com		◆	◆
hmac-sha2-256-etm@openssh.com		◆	◆

Security policy	TransferSFTPConnectorSecurityPolicy-FIPS-2024-10	TransferSFTPConnectorSecurityPolicy-2024-03	TransferSFTPConnectorSecurityPolicy-2023-07
hmac-sha2-512	◆	◆	◆
hmac-sha2-256	◆	◆	◆
hmac-sha1			◆
hmac-sha1-96			◆
Host Key Algorithms			
rsa-sha2-256	◆	◆	◆
rsa-sha2-512	◆	◆	◆
ecdsa-sha2-nistp256	◆	◆	◆
ecdsa-sha2-nistp384		◆	◆
ecdsa-sha2-nistp521		◆	◆
ssh-rsa			◆

Using hybrid post-quantum key exchange with Amazon Transfer Family

Transfer Family supports a hybrid post-quantum key establishment option for the Secure Shell (SSH) protocol. Post-quantum key establishment is needed because it's already possible to record network traffic and save it for decryption in future by a quantum computer, which is called a *store-now-harvest-later* attack.

You can use this option when you connect to Transfer Family for secure file transfers into and out of Amazon Simple Storage Service (Amazon S3) storage or Amazon Elastic File System (Amazon EFS). Post-quantum hybrid key establishment in SSH introduces post-quantum key establishment mechanisms, which it uses in conjunction with classical key exchange algorithms. SSH keys created with classical cipher suites are safe from brute-force attacks with current technology. However,

classical encryption isn't expected to remain secure after the emergence of large-scale quantum computing in the future.

If your organization relies on the long-term confidentiality of data passed over a Transfer Family connection, you should consider a plan to migrate to post-quantum cryptography before large-scale quantum computers become available for use.

To protect data encrypted today against potential future attacks, Amazon is participating with the cryptographic community in the development of quantum-resistant or post-quantum algorithms. We've implemented hybrid post-quantum key exchange cipher suites in Transfer Family that combine classic and post-quantum elements.

These hybrid cipher suites are available for use on your production workloads in most Amazon Regions. However, because the performance characteristics and bandwidth requirements of hybrid cipher suites are different from those of classic key exchange mechanisms, we recommend that you test them on your Transfer Family connections.

Find out more about post-quantum cryptography in the [Post-Quantum Cryptography](#) security blog post.

Contents

- [About post-quantum hybrid key exchange in SSH](#)
- [How post-quantum hybrid key establishment works in Transfer Family](#)
 - [Why ML-KEM?](#)
 - [Post-quantum hybrid SSH key exchange and cryptographic requirements \(FIPS 140\)](#)
- [Testing post-quantum hybrid key exchange in Transfer Family](#)
 - [Enable post-quantum hybrid key exchange on your SFTP endpoint](#)
 - [Set up an SFTP client that supports post-quantum hybrid key exchange](#)
 - [Confirm post-quantum hybrid key exchange in SFTP](#)

About post-quantum hybrid key exchange in SSH

Transfer Family supports post-quantum hybrid key exchange cipher suites, which uses both the classical [Elliptic Curve Diffie-Hellman \(ECDH\)](#) key exchange algorithm, and ML-KEM. ML-KEM is a post-quantum public-key encryption and key-establishment algorithm that the [National Institute for Standards and Technology \(NIST\)](#) has designated as its first standard post-quantum key-agreement algorithm.

The client and server still do an ECDH key exchange. Additionally, the server encapsulates a post-quantum shared secret to the client's post-quantum KEM public key, which is advertised in the client's SSH key exchange message. This strategy combines the high assurance of a classical key exchange with the security of the proposed post-quantum key exchanges, to help ensure that the handshakes are protected as long as the ECDH or the post-quantum shared secret cannot be broken.

How post-quantum hybrid key establishment works in Transfer Family

Amazon recently announced support for post-quantum key exchange in SFTP file transfers in Amazon Transfer Family. Transfer Family securely scales business-to-business file transfers to Amazon Storage services using SFTP and other protocols. SFTP is a more secure version of the File Transfer Protocol (FTP) that runs over SSH. The post-quantum key exchange support of Transfer Family raises the security bar for data transfers over SFTP.

The post-quantum hybrid key exchange SFTP support in Transfer Family includes combining post-quantum algorithms ML-KEM-768, and ML-KEM-1024, with ECDH over P256, P384, or Curve25519 curves. The following corresponding SSH key exchange methods are specified in [the post-quantum hybrid SSH key exchange draft](#).

- mlkem768nistp256-sha256
- mlkem1024nistp384-sha384
- mlkem768x25519-sha256

Why ML-KEM?

Amazon is committed to supporting standardized, interoperable algorithms. ML-KEM is the only post-quantum key exchange algorithm standardized and approved by the [NIST Post-Quantum Cryptography project](#). Standards bodies are already integrating ML-KEM into protocols. Amazon already supports ML-KEM in TLS in some Amazon API endpoints.

As part of this commitment, Amazon has submitted a draft proposal to the IETF for post-quantum cryptography that combines ML-KEM with NIST-approved curves like P256 for SSH. To help enhance security for our customers, the Amazon implementation of the post-quantum key exchange in SFTP and SSH follows that draft. We plan to support future updates to it until our proposal is adopted by the IETF and becomes a standard.

The new key exchange methods (listed in section [How post-quantum hybrid key establishment works in Transfer Family](#)) might change as the draft evolves towards standardization.

Note

Post-quantum algorithm support is currently available for post-quantum hybrid key exchange in TLS for Amazon KMS (see [Using hybrid post-quantum TLS with Amazon KMS](#)), Amazon Certificate Manager, and Amazon Secrets Manager API endpoints.

Post-quantum hybrid SSH key exchange and cryptographic requirements (FIPS 140)

For customers that require FIPS compliance, Transfer Family provides FIPS-approved cryptography in SSH by using the Amazon FIPS 140-certified, open-source cryptographic library, Amazon-LC. The post-quantum hybrid key exchange methods supported in the TransferSecurityPolicy-FIPS-2025-03 in Transfer Family are FIPS approved according to [NIST's SP 800-56Cr2 \(section 2\)](#). The German Federal Office for Information Security ([BSI](#)) and the Agence nationale de la sécurité des systèmes d'information ([ANSSI](#)) of France also recommend such post-quantum hybrid key exchange methods.

Testing post-quantum hybrid key exchange in Transfer Family

This section describes the steps you take to test post-quantum hybrid key exchange.

1. [Enable post-quantum hybrid key exchange on your SFTP endpoint.](#)
2. Use an SFTP client (such as [Set up an SFTP client that supports post-quantum hybrid key exchange](#)) that supports post-quantum hybrid key exchange by following the guidance in the aforementioned draft specification.
3. Transfer a file using a Transfer Family server.
4. [Confirm post-quantum hybrid key exchange in SFTP.](#)


Enable post-quantum hybrid key exchange on your SFTP endpoint

You can choose the SSH policy when you create a new SFTP server endpoint in Transfer Family, or by editing the Cryptographic algorithm options in an existing SFTP endpoint. The following snapshot shows an example of the Amazon Web Services Management Console where you update the SSH policy.


Cryptographic algorithm options [Info](#)

Security Policy

Choose a security policy that contains the cryptographic algorithms enabled for use by your server

TransferSecurityPolicy-PQ-SSH-Experimental-2023-04 

Q Find a security policy

TransferSecurityPolicy-2018-11
TransferSecurityPolicy-2020-06
TransferSecurityPolicy-2022-03
TransferSecurityPolicy-2023-05
TransferSecurityPolicy-2024-01
TransferSecurityPolicy-2025-03 
TransferSecurityPolicy-Restricted-2018-11
TransferSecurityPolicy-Restricted-2020-06

to it. Additi

The SSH policy names that support post-quantum key exchange are

TransferSecurityPolicy-2025-03 and **TransferSecurityPolicy-FIPS-2025-03**. For more details on Transfer Family policies, see [Security policies for Amazon Transfer Family servers](#).

Set up an SFTP client that supports post-quantum hybrid key exchange

After you select the correct post-quantum SSH policy in your SFTP Transfer Family endpoint, you can experiment with post-quantum SFTP in Transfer Family. Install the latest OpenSSH client (such as version 9.9) on your local system to test.

Note

Make sure that your client supports one or more of the ML-KEM algorithms listed earlier. You can view the supported algorithms for your version of OpenSSH by running this command: `ssh -Q kex`.

You can run the example SFTP client to connect to your SFTP endpoint (for example, `s-1111aaaa2222bbbb3.server.transfer.us-west-2.amazonaws.com`) by using the post-quantum hybrid key exchange methods, as shown in the following command.

```
sftp -v -o \  
  KexAlgorithms=mlkem768x25519-sha256 \  
  -i username_private_key_PEM_file \  
  username@server-id.server.transfer.region-id.amazonaws.com
```

In the previous command, replace the following items with your own information:

- Replace *username_private_key_PEM_file* with the SFTP user's private key PEM-encoded file
- Replace *username* with the SFTP user name
- Replace *server-id* with the Transfer Family server ID
- Replace *region-id* with the actual region where your Transfer Family server is located

Confirm post-quantum hybrid key exchange in SFTP

To confirm that post-quantum hybrid key exchange was used during an SSH connection for SFTP to Transfer Family, check the client output. Optionally, you can use a packet capture program. If you use the OpenSSH 9.9 client, the output should look similar to the following (omitting irrelevant information for brevity):

```
% sftp -o KexAlgorithms=mlkem768x25519-sha256 -v -o IdentitiesOnly=yes -  
i username_private_key_PEM_file username@s-1111aaaa2222bbbb3.server.transfer.us-  
west-2.amazonaws.com  
OpenSSH_9.9p2, OpenSSL 3.4.1 11 Feb 2025  
debug1: Reading configuration data /Users/username/.ssh/config  
debug1: /Users/username/.ssh/config line 146: Applying options for *  
debug1: Reading configuration data /Users/username/.ssh/bastions-config  
debug1: Reading configuration data /opt/homebrew/etc/ssh/ssh_config  
debug1: Connecting to s-1111aaaa2222bbbb3.server.transfer.us-west-2.amazonaws.com  
 [xxx.yyy.zzz.nnn] port 22.  
debug1: Connection established.  
[...]  
debug1: Local version string SSH-2.0-OpenSSH_9.9  
debug1: Remote protocol version 2.0, remote software version AWS_SFTP_1.1  
debug1: compat_banner: no match: AWS_SFTP_1.1  
debug1: Authenticating to s-1111aaaa2222bbbb3.server.transfer.us-  
west-2.amazonaws.com:22 as 'username'  
debug1: load_hostkeys: fopen /Users/username/.ssh/known_hosts2: No such file or  
  directory  
[...]  
debug1: SSH2_MSG_KEXINIT sent
```

```
debug1: SSH2_MSG_KEXINIT received
debug1: kex: algorithm: mlkem768x25519-sha256
debug1: kex: host key algorithm: ssh-ed25519
debug1: kex: server->client cipher: aes128-ctr MAC: hmac-sha2-256-etm@openssh.com
compression: none
debug1: kex: client->server cipher: aes128-ctr MAC: hmac-sha2-256-etm@openssh.com
compression: none
debug1: expecting SSH2_MSG_KEX_ECDH_REPLY
debug1: SSH2_MSG_KEX_ECDH_REPLY received
debug1: Server host key: ssh-ed25519 SHA256:Ic1Ti0cdDmFdStj06rfU0cmmNccwAha/ASH2unr6zX0
[...]
debug1: rekey out after 4294967296 blocks
debug1: SSH2_MSG_NEWKEYS sent
debug1: expecting SSH2_MSG_NEWKEYS
debug1: SSH2_MSG_NEWKEYS received
debug1: rekey in after 4294967296 blocks
[...]
Authenticated to s-1111aaaa2222bbbb3.server.transfer.us-west-2.amazonaws.com
([xxx.yyy.zzz.nnn]:22) using "publickey".
debug1: channel 0: new session [client-session] (inactive timeout: 0)
[...]
Connected to s-1111aaaa2222bbbb3.server.transfer.us-west-2.amazonaws.com.
sftp>
```

The output shows that client negotiation occurred using the post-quantum hybrid `mlkem768x25519-sha256` method and successfully established an SFTP session.

Data protection and encryption

The Amazon [shared responsibility model](#) applies to data protection in Amazon Transfer Family (Transfer Family). As described in this model, Amazon is responsible for protecting the global infrastructure that runs all of the Amazon Cloud. You are responsible for maintaining control over your content that is hosted on this infrastructure. This content includes the security configuration and management tasks for the Amazon services that you use. For more information about data privacy, see the [Data privacy FAQ](#). For information about data protection in Europe, see the [Amazon shared responsibility model and GDPR](#) blog post on the *Amazon Security Blog*.

For data protection purposes, we recommend that you protect Amazon account credentials and set up individual user accounts with Amazon IAM Identity Center. That way each user is given only the permissions necessary to fulfill their job duties. We also recommend that you secure your data in the following ways:

- Use multi-factor authentication (MFA) with each account.
- Use SSL/TLS to communicate with Amazon resources. We support TLS 1.2.
- Set up API and user activity logging with Amazon CloudTrail.
- Use Amazon encryption solutions, along with all default security controls within Amazon services.
- Use advanced managed security services such as Amazon Macie, which assists in discovering and securing personal data that is stored in Amazon S3.
- If you require FIPS 140-2 validated cryptographic modules when accessing Amazon through a command line interface or an API, use a FIPS endpoint. For more information about the available FIPS endpoints, see [Federal information processing standard \(FIPS\) 140-2](#).

We strongly recommend that you never put sensitive identifying information, such as your customers' account numbers, into free-form fields such as a **Name** field. This includes when you work with Transfer Family or other Amazon services using the console, API, Amazon CLI, or Amazon SDKs. Any configuration data that you enter into Transfer Family service configuration, or other services' configurations, might get picked up for inclusion in diagnostic logs. When you provide a URL to an external server, don't include credentials information in the URL to validate your request to that server.

In contrast, data from upload and download operations into and out of Transfer Family servers is treated as completely private and never exists outside of encrypted channels—such as an SFTP or FTPS connection. This data is only ever accessible to authorized persons.

Data encryption

Amazon Transfer Family uses the default encryption options you set for your Amazon S3 bucket to encrypt your data. When you enable encryption on a bucket, all objects are encrypted when they are stored in the bucket. The objects are encrypted by using server-side encryption with either Amazon S3 managed keys (SSE-S3) or Amazon Key Management Service (Amazon KMS) managed keys (SSE-KMS). For information about server-side encryption, see [Protecting data using server-side encryption](#) in the *Amazon Simple Storage Service User Guide*.

The following steps show you how to encrypt data in Amazon Transfer Family.

To allow encryption in Amazon Transfer Family

1. Enable default encryption for your Amazon S3 bucket. For instructions, see [Amazon S3 default encryption for S3 buckets](#) in the *Amazon Simple Storage Service User Guide*.

2. Update the Amazon Identity and Access Management (IAM) role policy that is attached to the user to grant the required Amazon Key Management Service (Amazon KMS) permissions.
3. If you are using a session policy for the user, the session policy must grant the required Amazon KMS permissions.

The following example shows an IAM policy that grants the minimum permissions required when using Amazon Transfer Family with an Amazon S3 bucket that is enabled for Amazon KMS encryption. Include this example policy in both the user IAM role policy and session policy, if you are using one.

```
{
  "Sid": "Stmt1544140969635",
  "Action": [
    "kms:Decrypt",
    "kms:Encrypt",
    "kms:GenerateDataKey",
    "kms:GetPublicKey",
    "kms:ListKeyPolicies"
  ],
  "Effect": "Allow",
  "Resource": "arn:aws-cn:kms:region:account-id:key/kms-key-id"
}
```

Note

The KMS key ID that you specify in this policy must be the same as the one specified for the default encryption in step 1.

Root, or the IAM role that is used for the user, must be allowed in the Amazon KMS key policy. For information about the Amazon KMS key policy, see [Using key policies in Amazon KMS](#) in the *Amazon Key Management Service Developer Guide*.

Managing SSH and PGP keys in Transfer Family

In this section, you can find information about SSH keys, including how to generate them and how to rotate them. For details about using Transfer Family with Amazon Lambda to manage keys, see the blog post [Enabling user self-service key management with Amazon Transfer Family and Amazon Lambda](#).

Note

Amazon Transfer Family accepts RSA, ECDSA, and ED25519 keys.

This section also covers how to generate and manage Pretty Good Privacy (PGP) keys.

Topics

- [Generate SSH keys for service-managed users](#)
- [Rotate SSH keys](#)
- [Generate PGP keys](#)
- [Manage PGP keys](#)
- [Supported PGP clients](#)

Supported algorithms for user and server keys

The following key algorithms are supported for user and server key-pairs within Amazon Transfer Family.

Note

For algorithms to use with PGP decryption in workflows, see [Algorithms supported for PGP key-pairs](#).

- For ED25519: ssh-ed25519
- For RSA:
 - rsa-sha2-256
 - rsa-sha2-512
- For ECDSA:
 - ecdsa-sha2-nistp256
 - ecdsa-sha2-nistp384
 - ecdsa-sha2-nistp521

Note

We support `ssh-rsa` with SHA1 for our older security policies. For details, see [Cryptographic algorithms](#).

Generate SSH keys for service-managed users

You can set up your server to authenticate users using the service managed authentication method, where usernames and SSH keys are stored within the service. The user's public SSH key is uploaded to the server as a user's property. This key is used by the server as part of a standard key-based authentication process. Each user can have multiple public SSH keys on file with an individual server. For limits on number of keys that can be stored per user, see [Amazon Transfer Family endpoints and quotas](#) in the *Amazon Web Services General Reference*.

As an alternative to the service managed authentication method, you can authenticate users using a custom identity provider, or Amazon Directory Service for Microsoft Active Directory. For more information, see [Working with custom identity providers](#) or [Using Amazon Directory Service for Microsoft Active Directory](#).

A server can only authenticate users using one method (service managed, directory service, or custom identity provider), and that method cannot be changed after the server is created.

Topics

- [Creating SSH keys on macOS, Linux, or Unix](#)
- [Creating SSH keys on Microsoft Windows](#)
- [Converting an SSH2 key to SSH public key format](#)

Creating SSH keys on macOS, Linux, or Unix

On the macOS, Linux, or Unix operating systems, you use the `ssh-keygen` command to create an SSH public key and SSH private key also known as a key pair.

Note

In the following examples, we do not specify a passphrase: in this case, the tool asks you to enter your passphrase and then repeat it to verify. Creating a passphrase offers better

protection for your private key, and might also improve overall system security. You cannot recover your passphrase: if you forget it, you must create a new key.

However, if you are generating a server host key, you *must* specify an empty passphrase, by specifying the `-N ""` option in the command (or by pressing **Enter** twice when prompted), because Transfer Family servers cannot request a password at start-up.

To create SSH keys on a macOS, Linux, or Unix operating system

1. On macOS, Linux, or Unix operating systems, open a command terminal.
2. Amazon Transfer Family accepts RSA-, ECDSA-, and ED25519-formatted keys. Choose the appropriate command based on the type of key-pair you are generating.

Tip: Replace *key_name* with the actual name of your SSH key pair file.

- To generate an RSA 4096-bit key pair:

```
ssh-keygen -t rsa -b 4096 -f key_name
```

- To generate an ECDSA 521-bit key-pair (ECDSA has bit sizes of 256, 384, and 521):

```
ssh-keygen -t ecdsa -b 521 -f key_name
```

- To generate an ED25519 key pair:

```
ssh-keygen -t ed25519 -f key_name
```

The following shows an example of the `ssh-keygen` output.

```
ssh-keygen -t rsa -b 4096 -f key_name
Generating public/private rsa key pair.

Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in key_name.
Your public key has been saved in key_name.pub.
The key fingerprint is:
SHA256:8tDDwPmanTFcEzjTwPGETVW0GW1nVz+gtCCE8hL7PrQ bob.amazon.com
The key's randomart image is:
```



```

+---[RSA 4096]-----+
|   . . . . .E       |
|   .   =   . . .    |
|. . . = . . o      |
|   . o +   oo =     |
|   + =   .S.= *    |
|   . o o . .B + o  |
|       .o.+.* .    |
|       =o**+.      |
|       ..*o**+.    |
+-----[SHA256]-----+

```

Tip: When you run the `ssh-keygen` command as shown preceding, it creates the public and private keys as files in the current directory.

Your SSH key pair is now ready to use. Follow steps 3 and 4 to store the SSH public key for your service-managed users. These users use the keys when they transfer files on Transfer Family server endpoints.

3. Navigate to the `key_name.pub` file and open it.
4. Copy the text and paste it in **SSH public key** for the service-managed user.
 - a. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>, then select **Servers** from the navigation pane.
 - b. On the **Servers** page, select the **Server ID** for server that contains the user that you want to update.
 - c. Select the user for which you are adding a public key.
 - d. In the **SSH public keys** pane, choose **Add SSH public key**.

The screenshot shows the 'User: OneUser' configuration page in the Amazon Transfer Family console. The breadcrumb navigation is 'Transfer Family > Servers > s-[server icon] > User: OneUser'. The page title is 'User: OneUser' with 'View logs' and 'Delete' buttons. The 'User configuration' section includes an 'Edit' button and fields for 'Role' (with a 'Role' link), 'Policy' (with a 'View' button), 'Posix Profile' (with 'User ID: 2001', 'Group ID: 2001', and 'Secondary Group IDs: -'), and 'Home directory' (with '/fs-[redacted]/' and 'Restricted'). Below this is the 'SSH public keys (1)' section with 'Delete' and 'Add SSH public key' buttons. A table lists one key with columns for 'Date imported' (6/14/2022, 12:53:34 PM) and 'Fingerprint' (SHA256-[redacted]).

- e. Paste the text of the public key you generated into the SSH public key text box, and then choose **Add key**.

The screenshot shows the 'Add key' dialog in the Amazon Transfer Family console. The breadcrumb navigation is 'Transfer Family > Servers > s-[server icon] > OneUser > Add key'. The title is 'Add key'. The 'SSH public keys' section contains the text 'SSH public key Info' and 'Paste the contents of SSH public key'. Below this is a text input field with the placeholder text 'Enter SSH public key'. At the bottom right, there are 'Cancel' and 'Add key' buttons.

The new key is listed in the SSH public key pane.

SSH public keys (2)		Delete	Add SSH public key
<input type="checkbox"/>	Date imported	Fingerprint	< 1 >
<input type="checkbox"/>	6/14/2022, 12:53:34 PM	SHA256-	
<input type="checkbox"/>	10/20/2022, 4:26:51 PM	SHA256-	

Creating SSH keys on Microsoft Windows

Windows uses a slightly different SSH key pair format. The public key must be in the PUB format, and the private key must be in the PPK format. On Windows, you can use PuTTYgen to create an SSH key pair in the appropriate formats. You can also use PuTTYgen to convert a private key generated using `ssh-keygen` to a `.ppk` file.

Note

If you present WinSCP with a private key file not in `.ppk` format, that client offers to convert the key into `.ppk` format for you.

For a tutorial about creating SSH keys by using PuTTYgen on Windows, see the [SSH.com website](https://www.ssh.com).

Converting an SSH2 key to SSH public key format

Amazon Transfer Family only accepts SSH-formatted public keys. If you have an SSH2 public key, you need to convert it. An SSH2 public key has the following format:

```

---- BEGIN SSH2 PUBLIC KEY ----
Comment: "rsa-key-20160402"
AAAAB3NzaC1yc2EAAAABJQAAAQEAiL0jjDdFqK/kYThqKt7THrjABTPWvXmB3URI
:
:
---- END SSH2 PUBLIC KEY ----

```

An SSH public key has the following format:

```
ssh-rsa AAAAB3NzaC1yc2EAAAABJQAAA...
```

Run the following command to convert an SSH2-formatted public key into an SSH-formatted public key. Replace *ssh2-key* with the name of your SSH2 key, and *ssh-key* with the name of your SSH key.

```
ssh-keygen -i -f ssh2-key.pub > ssh-key.pub
```

Rotate SSH keys

For security, we recommend the best practice of rotating your SSH keys. Usually, this rotation is specified as a part of a security policy and is implemented in some automated fashion. Depending upon the level of security, for a highly sensitive communication, an SSH key pair might be used only once. Doing this eliminates any risk due to stored keys. However, it is much more common to store SSH credentials for a period of time and set an interval that doesn't place undue burden on users. A time interval of three months is common.

There are two methods used to perform SSH key rotation:

- On the console, you can upload a new SSH public key and delete an existing SSH public key.
- Using the API, you can update existing users by using the [DeleteSshPublicKey](#) API to delete a user's Secure Shell (SSH) public key and the [ImportSshPublicKey](#) API to add a new Secure Shell (SSH) public key to the user's account.

Console

To perform a key rotation in the console

1. Open the Amazon Transfer Family console at <https://console.amazonaws.cn/transfer/>.
2. Navigate to the **Servers** page.
3. Choose the identifier in the **Server ID** column to see the **Server details** page.
4. Under **Users**, select the check box of the user whose SSH public key that you want to rotate, then choose **Actions**, and then choose **Add key** to see the **Add key** page.

or

Choose the username to see the **User details** page, and then choose **Add SSH public key** to see the **Add key** page.

5. Enter the new SSH public key and choose **Add key**.

⚠ Important

The format of the SSH public key depends on the type of key you generated.

- For RSA keys, the format is `ssh-rsa string`.
- For ED25519 keys, the format is `ssh-ed25519 string`.
- For ECDSA keys, the key begins with `ecdsa-sha2-nistp256`, `ecdsa-sha2-nistp384`, or `ecdsa-sha2-nistp521`, depending on the size of the key you generated. The beginning string is then followed by *string*, similar to the other key types.

You are returned to the **User details** page, and the new SSH public key that you just entered appears in the **SSH public keys** section.

6. Select the check box of the old you key that you want to delete and then choose **Delete**.
7. Confirm the deletion operation by entering the word `delete`, and then choose **Delete**.

API**To perform a key rotation using the API**

1. On macOS, Linux, or Unix operating systems, open a command terminal.
2. Retrieve the SSH key that you want to delete by entering the following command. To use this command, replace *serverID* with the server ID for your Transfer Family server, and replace *username* with your username.

```
aws transfer describe-user --server-id='serverID' --user-name='username'
```

The command returns details about the user. Copy the contents of the `"SshPublicKeyId"` field. You will need to enter this value later in this procedure.

```
"SshPublicKeys": [ { "SshPublicKeyBody": "public-key", "SshPublicKeyId":  
  "keyID",  
  "DateImported": 1621969331.072 } ],
```

- Next, import a new SSH key for your user. At the prompt, enter the following command. To use this command, replace *serverID* with the server ID for your Transfer Family server, replace *username* with your username, and replace *public-key* with the fingerprint of your new public key.

```
aws transfer import-ssh-public-key --server-id='serverID' --user-name='username'
--ssh-public-key-body='public-key'
```

If the command is successful, no output is returned.

- Finally, delete the old key by running the following command. To use this command, replace *serverID* with the server ID for your Transfer Family server, replace *username* with your username, and replace *keyID-from-step-2* with the key ID value that you copied in step 2 of this procedure

```
aws transfer delete-ssh-public-key --server-id='serverID' --user-name='username'
--ssh-public-key-id='keyID-from-step-2'
```

- (Optional) To confirm that the old key no longer exists, repeat step 2.

Generate PGP keys

You can use Pretty Good Privacy (PGP) decryption with the files that Transfer Family processes with workflows. To use decryption in a workflow step, provide a PGP key.

The Amazon storage blog has a post that describes how to simply decrypt files without writing any code using Transfer Family Managed workflows, [Encrypt and decrypt files with PGP and Amazon Transfer Family](#).

The operator that you use to generate your PGP keys depends on your operating system and the version of the key-generation software that you're using.

If you're using Linux or Unix, use your package installer to install `gpg`. Depending on your Linux distribution, one of the following commands should work for you.

```
sudo yum install gnupg
```

```
sudo apt-get install gnupg
```

For Windows or macOS, you can download what you need from <https://gnupg.org/download/>.

After you install your PGP key generator software, you run the `gpg --full-gen-key` or `gpg --gen-key` command to generate a key pair.

Note

If you're using GnuPG version 2.3.0 or newer, you must run `gpg --full-gen-key`. When prompted for the type of key to create, choose RSA or ECC. However, if you choose ECC, make sure to choose either NIST or BrainPool for the elliptic curve. **Do not** choose Curve 25519.

Algorithms supported for PGP key-pairs

We support the following algorithms for PGP key pairs:

- RSA
- Elgamal
- ECC:
 - NIST
 - BrainPool

Note

We don't support cCurve25519 keys.

Useful gpg subcommands

The following are some useful subcommands for `gpg`:

- `gpg --help` – This command lists the available options and might include some examples.
- `gpg --list-keys` – This command lists the details for all the key pairs that you have created.
- `gpg --fingerprint` – This command lists the details for all your key pairs, including each key's fingerprint.

- `gpg --export -a user-name` – This command exports the public key portion of the key for the *user-name* that was used when the key was generated.

Manage PGP keys

To manage your PGP keys, use Amazon Secrets Manager.

Note

Your secret name includes your Transfer Family server ID. This means you should have already identified or created a server *before* you can store your PGP key information in Amazon Secrets Manager.

If you want to use one key and passphrase for all of your users, you can store the PGP key block information under the secret name `aws/transfer/server-id@pgp-default`, where *server-id* is the ID for your Transfer Family server. Transfer Family uses this default key if there is no key where the *user-name* matches the user that's executing the workflow.

You can create a key for a specific user. In this case, the format for the secret name is `aws/transfer/server-id/user-name`, where *user-name* matches the user that's running the workflow for a Transfer Family server.

Note

You can store a maximum of 3 PGP private keys, per Transfer Family server, per user.

To configure PGP keys for use with decryption

1. Depending on the version of GPG that you are using, run one of the following commands to generate a PGP key pair that doesn't use a Curve 25519 encryption algorithm.
 - If you are using **GnuPG** version 2.3.0 or newer, run the following command:

```
gpg --full-gen-key
```


You can choose **RSA**, or, if you choose **ECC**, you can choose either **NIST** or **BrainPool** for the elliptic curve. If you run `gpg --gen-key` instead, you create a key pair that uses the ECC Curve 25519 encryption algorithm, which we don't currently support for PGP keys.

- For versions of **GnuPG** prior to 2.3.0, you can use the following command, since RSA is the default encryption type.

```
gpg --gen-key
```

Important

During the key-generation process, you must provide a passphrase and an email address. Make sure to take note of these values. You must provide the passphrase when you enter the key's details into Amazon Secrets Manager later in this procedure. And you must provide the same email address to export the private key in the next step.

2. Run the following command to export the private key. To use this command, replace *private.pgp* with the name of the file in which to save the private key block, and *marymajor@example.com* with the email address that you used when you generated the key pair.

```
gpg --output private.pgp --armor --export-secret-key marymajor@example.com
```

3. Use Amazon Secrets Manager to store your PGP key.
 - a. Sign in to the Amazon Web Services Management Console and open the Amazon Secrets Manager console at <https://console.amazonaws.cn/secretsmanager/>.
 - b. In the left navigation pane, choose **Secrets**.
 - c. On the **Secrets** page, choose **Store a new secret**.
 - d. On the **Choose secret type** page, for **Secret type**, select **Other type of secret**.
 - e. In the **Key/value pairs** section, choose the **Key/value** tab.
 - **Key** – Enter **PGPPrivateKey**.

Note

You must enter the **PGPprivateKey** string exactly: do not add any spaces before or between characters.

- **value** – Paste the text of your private key into the value field. You can find the text of your private key in the file (for example, `private.pgp`) that you specified when you exported your key earlier in this procedure. The key begins with `-----BEGIN PGP PRIVATE KEY BLOCK-----` and ends with `-----END PGP PRIVATE KEY BLOCK-----`.

Note

Make sure that the text block contains only the private key and does not contain the public key as well.

- f. Select **Add row** and in the **Key/value pairs** section, choose the **Key/value** tab.

- **Key** – Enter **PGPPassphrase**.

Note

You must enter the **PGPPassphrase** string exactly: do not add any spaces before or between characters.

- **value** – Enter the passphrase you used when you generated your PGP key pair.

Choose secret type

Secret type [Info](#)

Credentials for Amazon RDS database

Credentials for Amazon DocumentDB database

Credentials for Amazon Redshift cluster

Credentials for other database

Other type of secret
API key, OAuth token, other.

Key/value pairs [Info](#)

Key/value

Plaintext

PGPPrivateKey	-----BEGIN PGP PRIVATE KEY BLOCK-----	Remove
PGPPassphrase	mypassphrase	Remove

Encryption key [Info](#)

You can encrypt using the KMS key that Secrets Manager creates or a customer managed KMS key that you create.

aws/secretsmanager

▼

↻

[Add new key](#)

Note

You can add up to 3 sets of keys and passphrases. To add a second set, add two new rows, and enter **PGPPrivateKey2** and **PGPPassphrase2** for the keys, and paste in another private key and passphrase. To add a third set, key values must be **PGPPrivateKey3** and **PGPPassphrase3**.

- g. Choose **Next**.
- h. On the **Configure secret** page, enter a name and description for your secret.
 - If you're creating a default key, that is, a key that can be used by any Transfer Family user, enter **aws/transfer/*server-id*@pgp-default**. Replace *server-id* with the ID of the server that contains the workflow that has a decrypt step.
 - If you're creating a key to be used by a specific Transfer Family user, enter **aws/transfer/*server-id*/*user-name***. Replace *server-id* with the ID of the server that contains the workflow that has a decrypt step, and replace *user-name* with the name of the user that's running the workflow. The *user-name* is stored in the identity provider that the Transfer Family server is using.

- i. Choose **Next** and accept the defaults on the **Configure rotation** page. Then choose **Next**.
- j. On the **Review** page, choose **Store** to create and store the secret.

The following screenshot shows the details for the user **marymajor** for a specific Transfer Family server. This example shows three keys and their corresponding passphrases.

The screenshot displays the AWS Secrets Manager console for a secret named `/aws/transfer/s-.../marymajor`. The secret is stored in the `aws/secretsmanager` encryption key. The secret description states: "Contains the PGP secret keys and corresponding passphrases to use for user marymajor on Transfer Family server s-...".

The secret value is displayed in plaintext and contains the following keys and values:

Secret key	Secret value
PGPPrivateKey	-----BEGIN PGP PRIVATE KEY BLOCK----- [Redacted]
PGPPassphrase	mypassphrase
PGPPrivateKey2	-----BEGIN PGP PRIVATE KEY BLOCK----- [Redacted]
PGPPassphrase2	mypassphrase2
PGPPrivateKey3	-----BEGIN PGP PRIVATE KEY BLOCK----- [Redacted]
PGPPassphrase3	mypassphrase3


Supported PGP clients

The following clients have been tested with Transfer Family and can be used to generate PGP keys, and to encrypt files that you intend to decrypt with a workflow.

- **Gpg4win + Kleopatra.**

Note

When you select **Sign / Encrypt Files**, make sure to clear the selection for **Sign as**: we do not currently support signing for encrypted files.

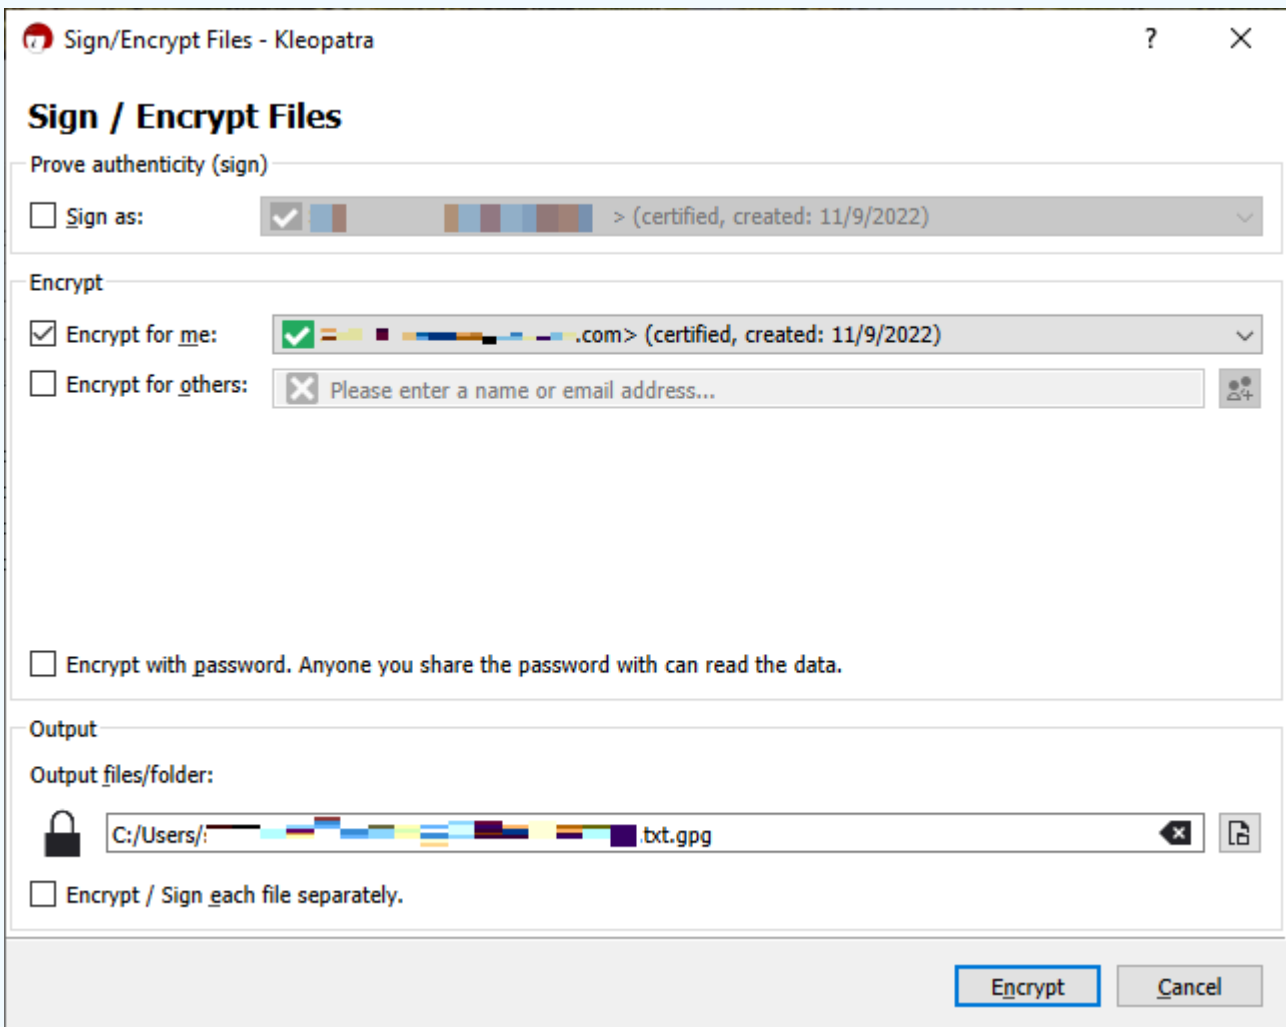

If you sign the encrypted file and attempt to upload it to a Transfer Family server with a decryption workflow, you receive the following error:

```
Encrypted file with signed message unsupported
```

- Major **GnuPG** versions: 2.4, 2.3, 2.2, 2.0, and 1.4.

Note that other PGP clients might work as well, but only the clients mentioned here have been tested with Transfer Family.

Identity and access management for Amazon Transfer Family

Amazon Identity and Access Management (IAM) is an Amazon Web Services service that helps an administrator securely control access to Amazon resources. IAM administrators control who can

be *authenticated* (signed in) and *authorized* (have permissions) to use Amazon Transfer Family resources. IAM is an Amazon Web Services service that you can use with no additional charge.

Topics

- [Audience](#)
- [Authenticating with identities](#)
- [Managing access using policies](#)
- [How Amazon Transfer Family works with IAM](#)
- [Amazon Transfer Family identity-based policy examples](#)
- [Amazon Transfer Family tag-based policy examples](#)
- [Troubleshooting Amazon Transfer Family identity and access](#)

Audience

How you use Amazon Identity and Access Management (IAM) differs, depending on the work that you do in Amazon Transfer Family.

Service user – If you use the Amazon Transfer Family service to do your job, then your administrator provides you with the credentials and permissions that you need. As you use more Amazon Transfer Family features to do your work, you might need additional permissions. Understanding how access is managed can help you request the right permissions from your administrator. If you cannot access a feature in Amazon Transfer Family, see [Troubleshooting Amazon Transfer Family identity and access](#).

Service administrator – If you're in charge of Amazon Transfer Family resources at your company, you probably have full access to Amazon Transfer Family. It's your job to determine which Amazon Transfer Family features and resources your service users should access. You must then submit requests to your IAM administrator to change the permissions of your service users. Review the information on this page to understand the basic concepts of IAM. To learn more about how your company can use IAM with Amazon Transfer Family, see [How Amazon Transfer Family works with IAM](#).

IAM administrator – If you're an IAM administrator, you might want to learn details about how you can write policies to manage access to Amazon Transfer Family. To view example Amazon Transfer Family identity-based policies that you can use in IAM, see [Amazon Transfer Family identity-based policy examples](#).

Authenticating with identities

Authentication is how you sign in to Amazon using your identity credentials. You must be *authenticated* (signed in to Amazon) as the Amazon Web Services account root user, as an IAM user, or by assuming an IAM role.

If you access Amazon programmatically, Amazon provides a software development kit (SDK) and a command line interface (CLI) to cryptographically sign your requests by using your credentials. If you don't use Amazon tools, you must sign requests yourself. For more information about using the recommended method to sign requests yourself, see [Amazon Signature Version 4 for API requests](#) in the *IAM User Guide*.

Regardless of the authentication method that you use, you might be required to provide additional security information. For example, Amazon recommends that you use multi-factor authentication (MFA) to increase the security of your account. To learn more, see [Amazon Multi-factor authentication in IAM](#) in the *IAM User Guide*.

Amazon Web Services account root user

When you create an Amazon Web Services account, you begin with one sign-in identity that has complete access to all Amazon Web Services services and resources in the account. This identity is called the Amazon Web Services account *root user* and is accessed by signing in with the email address and password that you used to create the account. We strongly recommend that you don't use the root user for your everyday tasks. Safeguard your root user credentials and use them to perform the tasks that only the root user can perform. For the complete list of tasks that require you to sign in as the root user, see [Tasks that require root user credentials](#) in the *IAM User Guide*.

Federated identity

As a best practice, require human users, including users that require administrator access, to use federation with an identity provider to access Amazon Web Services services by using temporary credentials.

A *federated identity* is a user from your enterprise user directory, a web identity provider, the Amazon Directory Service, or any user that accesses Amazon Web Services services by using credentials provided through an identity source. When federated identities access Amazon Web Services accounts, they assume roles, and the roles provide temporary credentials.

IAM users and groups

An [IAM user](#) is an identity within your Amazon Web Services account that has specific permissions for a single person or application. Where possible, we recommend relying on temporary credentials instead of creating IAM users who have long-term credentials such as passwords and access keys. However, if you have specific use cases that require long-term credentials with IAM users, we recommend that you rotate access keys. For more information, see [Rotate access keys regularly for use cases that require long-term credentials](#) in the *IAM User Guide*.

An [IAM group](#) is an identity that specifies a collection of IAM users. You can't sign in as a group. You can use groups to specify permissions for multiple users at a time. Groups make permissions easier to manage for large sets of users. For example, you could have a group named *IAMAdmins* and give that group permissions to administer IAM resources.

Users are different from roles. A user is uniquely associated with one person or application, but a role is intended to be assumable by anyone who needs it. Users have permanent long-term credentials, but roles provide temporary credentials. To learn more, see [Use cases for IAM users](#) in the *IAM User Guide*.

IAM roles

An [IAM role](#) is an identity within your Amazon Web Services account that has specific permissions. It is similar to an IAM user, but is not associated with a specific person. To temporarily assume an IAM role in the Amazon Web Services Management Console, you can [switch from a user to an IAM role \(console\)](#). You can assume a role by calling an Amazon CLI or Amazon API operation or by using a custom URL. For more information about methods for using roles, see [Methods to assume a role](#) in the *IAM User Guide*.

IAM roles with temporary credentials are useful in the following situations:

- **Federated user access** – To assign permissions to a federated identity, you create a role and define permissions for the role. When a federated identity authenticates, the identity is associated with the role and is granted the permissions that are defined by the role. For information about roles for federation, see [Create a role for a third-party identity provider \(federation\)](#) in the *IAM User Guide*.
- **Temporary IAM user permissions** – An IAM user or role can assume an IAM role to temporarily take on different permissions for a specific task.
- **Cross-account access** – You can use an IAM role to allow someone (a trusted principal) in a different account to access resources in your account. Roles are the primary way to grant cross-

account access. However, with some Amazon Web Services services, you can attach a policy directly to a resource (instead of using a role as a proxy). To learn the difference between roles and resource-based policies for cross-account access, see [Cross account resource access in IAM](#) in the *IAM User Guide*.

- **Cross-service access** – Some Amazon Web Services services use features in other Amazon Web Services services. For example, when you make a call in a service, it's common for that service to run applications in Amazon EC2 or store objects in Amazon S3. A service might do this using the calling principal's permissions, using a service role, or using a service-linked role.
- **Forward access sessions (FAS)** – When you use an IAM user or role to perform actions in Amazon, you are considered a principal. When you use some services, you might perform an action that then initiates another action in a different service. FAS uses the permissions of the principal calling an Amazon Web Services service, combined with the requesting Amazon Web Services service to make requests to downstream services. FAS requests are only made when a service receives a request that requires interactions with other Amazon Web Services services or resources to complete. In this case, you must have permissions to perform both actions. For policy details when making FAS requests, see [Forward access sessions](#).
- **Service role** – A service role is an [IAM role](#) that a service assumes to perform actions on your behalf. An IAM administrator can create, modify, and delete a service role from within IAM. For more information, see [Create a role to delegate permissions to an Amazon Web Services service](#) in the *IAM User Guide*.
- **Service-linked role** – A service-linked role is a type of service role that is linked to an Amazon Web Services service. The service can assume the role to perform an action on your behalf. Service-linked roles appear in your Amazon Web Services account and are owned by the service. An IAM administrator can view, but not edit the permissions for service-linked roles.
- **Applications running on Amazon EC2** – You can use an IAM role to manage temporary credentials for applications that are running on an EC2 instance and making Amazon CLI or Amazon API requests. This is preferable to storing access keys within the EC2 instance. To assign an Amazon role to an EC2 instance and make it available to all of its applications, you create an instance profile that is attached to the instance. An instance profile contains the role and enables programs that are running on the EC2 instance to get temporary credentials. For more information, see [Use an IAM role to grant permissions to applications running on Amazon EC2 instances](#) in the *IAM User Guide*.

Managing access using policies

You control access in Amazon by creating policies and attaching them to Amazon identities or resources. A policy is an object in Amazon that, when associated with an identity or resource, defines their permissions. Amazon evaluates these policies when a principal (user, root user, or role session) makes a request. Permissions in the policies determine whether the request is allowed or denied. Most policies are stored in Amazon as JSON documents. For more information about the structure and contents of JSON policy documents, see [Overview of JSON policies](#) in the *IAM User Guide*.

Administrators can use Amazon JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

By default, users and roles have no permissions. To grant users permission to perform actions on the resources that they need, an IAM administrator can create IAM policies. The administrator can then add the IAM policies to roles, and users can assume the roles.

IAM policies define permissions for an action regardless of the method that you use to perform the operation. For example, suppose that you have a policy that allows the `iam:GetRole` action. A user with that policy can get role information from the Amazon Web Services Management Console, the Amazon CLI, or the Amazon API.

Identity-based policies

Identity-based policies are JSON permissions policy documents that you can attach to an identity, such as an IAM user, group of users, or role. These policies control what actions users and roles can perform, on which resources, and under what conditions. To learn how to create an identity-based policy, see [Define custom IAM permissions with customer managed policies](#) in the *IAM User Guide*.

Identity-based policies can be further categorized as *inline policies* or *managed policies*. Inline policies are embedded directly into a single user, group, or role. Managed policies are standalone policies that you can attach to multiple users, groups, and roles in your Amazon Web Services account. Managed policies include Amazon managed policies and customer managed policies. To learn how to choose between a managed policy or an inline policy, see [Choose between managed policies and inline policies](#) in the *IAM User Guide*.

Resource-based policies

Resource-based policies are JSON policy documents that you attach to a resource. Examples of resource-based policies are IAM *role trust policies* and Amazon S3 *bucket policies*. In services that

support resource-based policies, service administrators can use them to control access to a specific resource. For the resource where the policy is attached, the policy defines what actions a specified principal can perform on that resource and under what conditions. You must [specify a principal](#) in a resource-based policy. Principals can include accounts, users, roles, federated users, or Amazon Web Services services.

Resource-based policies are inline policies that are located in that service. You can't use Amazon managed policies from IAM in a resource-based policy.

Access control lists (ACLs)

Access control lists (ACLs) control which principals (account members, users, or roles) have permissions to access a resource. ACLs are similar to resource-based policies, although they do not use the JSON policy document format.

Amazon S3, Amazon WAF, and Amazon VPC are examples of services that support ACLs. To learn more about ACLs, see [Access control list \(ACL\) overview](#) in the *Amazon Simple Storage Service Developer Guide*.

Other policy types

Amazon supports additional, less-common policy types. These policy types can set the maximum permissions granted to you by the more common policy types.

- **Permissions boundaries** – A permissions boundary is an advanced feature in which you set the maximum permissions that an identity-based policy can grant to an IAM entity (IAM user or role). You can set a permissions boundary for an entity. The resulting permissions are the intersection of an entity's identity-based policies and its permissions boundaries. Resource-based policies that specify the user or role in the `Principal` field are not limited by the permissions boundary. An explicit deny in any of these policies overrides the allow. For more information about permissions boundaries, see [Permissions boundaries for IAM entities](#) in the *IAM User Guide*.
- **Service control policies (SCPs)** – SCPs are JSON policies that specify the maximum permissions for an organization or organizational unit (OU) in Amazon Organizations. Amazon Organizations is a service for grouping and centrally managing multiple Amazon Web Services accounts that your business owns. If you enable all features in an organization, then you can apply service control policies (SCPs) to any or all of your accounts. The SCP limits permissions for entities in member accounts, including each Amazon Web Services account root user. For more information about Organizations and SCPs, see [Service control policies](#) in the *Amazon Organizations User Guide*.

- **Resource control policies (RCPs)** – RCPs are JSON policies that you can use to set the maximum available permissions for resources in your accounts without updating the IAM policies attached to each resource that you own. The RCP limits permissions for resources in member accounts and can impact the effective permissions for identities, including the Amazon Web Services account root user, regardless of whether they belong to your organization. For more information about Organizations and RCPs, including a list of Amazon Web Services services that support RCPs, see [Resource control policies \(RCPs\)](#) in the *Amazon Organizations User Guide*.
- **Session policies** – Session policies are advanced policies that you pass as a parameter when you programmatically create a temporary session for a role or federated user. The resulting session's permissions are the intersection of the user or role's identity-based policies and the session policies. Permissions can also come from a resource-based policy. An explicit deny in any of these policies overrides the allow. For more information, see [Session policies](#) in the *IAM User Guide*.

Multiple policy types

When multiple types of policies apply to a request, the resulting permissions are more complicated to understand. To learn how Amazon determines whether to allow a request when multiple policy types are involved, see [Policy evaluation logic](#) in the *IAM User Guide*.

How Amazon Transfer Family works with IAM

Before you use Amazon Identity and Access Management (IAM) to manage access to Amazon Transfer Family, you should understand what IAM features are available to use with Amazon Transfer Family. To get a high-level view of how Amazon Transfer Family and other Amazon services work with IAM, see [Amazon services that work with IAM](#) in the *IAM User Guide*.

Topics

- [Amazon Transfer Family identity-based policies](#)
- [Amazon Transfer Family resource-based policies](#)
- [Authorization based on Amazon Transfer Family tags](#)
- [Amazon Transfer Family IAM roles](#)

Amazon Transfer Family identity-based policies

With IAM identity-based policies, you can specify allowed or denied actions and resources as well as the conditions under which actions are allowed or denied. Amazon Transfer Family supports

specific actions, resources, and condition keys. To learn about all of the elements that you use in a JSON policy, see [IAM JSON policy elements reference](#) in the *Amazon Identity and Access Management User Guide*.

Actions

Administrators can use Amazon JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The Action element of a JSON policy describes the actions that you can use to allow or deny access in a policy. Policy actions usually have the same name as the associated Amazon API operation. There are some exceptions, such as *permission-only actions* that don't have a matching API operation. There are also some operations that require multiple actions in a policy. These additional actions are called *dependent actions*.

Include actions in a policy to grant permissions to perform the associated operation.

Policy actions in Amazon Transfer Family use the following prefix before the action: `transfer:`. For example, to grant someone permission to create a server, with the Transfer Family `CreateServer` API operation, you include the `transfer:CreateServer` action in their policy. Policy statements must include either an Action or NotAction element. Amazon Transfer Family defines its own set of actions that describe tasks that you can perform with this service.

To specify multiple actions in a single statement, separate them with commas as follows.

```
"Action": [  
    "transfer:action1",  
    "transfer:action2"
```

You can specify multiple actions using wildcards (*). For example, to specify all actions that begin with the word `Describe`, include the following action.

```
"Action": "transfer:Describe*"
```

To see a list of Amazon Transfer Family actions, see [Actions defined by Amazon Transfer Family](#) in the *Service Authorization Reference*.

Resources

Administrators can use Amazon JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The Resource JSON policy element specifies the object or objects to which the action applies. Statements must include either a Resource or a NotResource element. As a best practice, specify a resource using its [Amazon Resource Name \(ARN\)](#). You can do this for actions that support a specific resource type, known as *resource-level permissions*.

For actions that don't support resource-level permissions, such as listing operations, use a wildcard (*) to indicate that the statement applies to all resources.

```
"Resource": "*"
```

The Transfer Family server resource has the following ARN.

```
arn:aws-cn:transfer:${Region}:${Account}:server/${ServerId}
```

For example, to specify the s-01234567890abcdef Transfer Family server in your statement, use the following ARN.

```
"Resource": "arn:aws-cn:transfer:us-east-1:123456789012:server/s-01234567890abcdef"
```

For more information about the format of ARNs, see [Amazon Resource Names \(ARNs\)](#) in the *Service Authorization Reference*, or [IAM ARNs](#) in the *IAM User Guide*.

To specify all instances that belong to a specific account, use the wildcard (*).

```
"Resource": "arn:aws-cn:transfer:us-east-1:123456789012:server/*"
```

Some Amazon Transfer Family actions are performed on multiple resources, such as those used in IAM policies. In those cases, you must use the wildcard (*).

```
"Resource": "arn:aws-cn:transfer:*:123456789012:server/*"
```

In some cases you need to specify more than one type of resource, for example, if you create a policy that allows access to Transfer Family servers and users. To specify multiple resources in a single statement, separate the ARNs with commas.

```
"Resource": [  
    "resource1",  
    "resource2"
```

]

To see a list of Amazon Transfer Family resources, see [Resource types defined by Amazon Transfer Family](#) in the *Service Authorization Reference*.

Condition keys

Administrators can use Amazon JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The `Condition` element (or *Condition block*) lets you specify conditions in which a statement is in effect. The `Condition` element is optional. You can create conditional expressions that use [condition operators](#), such as equals or less than, to match the condition in the policy with values in the request.

If you specify multiple `Condition` elements in a statement, or multiple keys in a single `Condition` element, Amazon evaluates them using a logical AND operation. If you specify multiple values for a single condition key, Amazon evaluates the condition using a logical OR operation. All of the conditions must be met before the statement's permissions are granted.

You can also use placeholder variables when you specify conditions. For example, you can grant an IAM user permission to access a resource only if it is tagged with their IAM user name. For more information, see [IAM policy elements: variables and tags](#) in the *IAM User Guide*.

Amazon supports global condition keys and service-specific condition keys. To see all Amazon global condition keys, see [Amazon global condition context keys](#) in the *IAM User Guide*.

Amazon Transfer Family defines its own set of condition keys and also supports using some global condition keys. To see a list of Amazon Transfer Family condition keys, see [Condition keys for Amazon Transfer Family](#) in the *Service Authorization Reference*.

Examples

To view examples of Amazon Transfer Family identity-based policies, see [Amazon Transfer Family identity-based policy examples](#).

Amazon Transfer Family resource-based policies

Resource-based policies are JSON policy documents that specify what actions a specified principal can perform on the Amazon Transfer Family resource and under what conditions. Amazon S3 supports resource-based permissions policies for Amazon S3 *buckets*. Resource-based policies let

you grant usage permission to other accounts on a per-resource basis. You can also use a resource-based policy to allow an Amazon service to access your Amazon S3 *buckets*.

To enable cross-account access, you can specify an entire account or IAM entities in another account as the [principal in a resource-based policy](#). Adding a cross-account principal to a resource-based policy is only half of establishing the trust relationship. When the principal and the resource are in different Amazon accounts, you must also grant the principal entity permission to access the resource. Grant permission by attaching an identity-based policy to the entity. However, if a resource-based policy grants access to a principal in the same account, no additional identity-based policy is required. For more information, see [How IAM roles differ from resource-based policies](#) in the *Amazon Identity and Access Management User Guide*.

The Amazon S3 service supports only one type of resource-based policy called a *bucket policy*, which is attached to a *bucket*. This policy defines which principal entities (accounts, users, roles, and federated users) can perform actions on the object.

Examples

To view examples of Amazon Transfer Family resource-based policies, see [Amazon Transfer Family tag-based policy examples](#).

Authorization based on Amazon Transfer Family tags

You can attach tags to Amazon Transfer Family resources or pass tags in a request to Amazon Transfer Family. To control access based on tags, you provide tag information in the [condition element](#) of a policy using the `transfer:ResourceTag/key-name`, `aws:RequestTag/key-name`, or `aws:TagKeys` condition keys. For information about how to use tags to control access to Amazon Transfer Family resources, see [Amazon Transfer Family tag-based policy examples](#).

Amazon Transfer Family IAM roles

An [IAM role](#) is an entity within your Amazon account that has specific permissions.

Using temporary credentials with Amazon Transfer Family

You can use temporary credentials to sign in with federation, assume an IAM role, or to assume a cross-account role. You obtain temporary security credentials by calling Amazon STS API operations such as [AssumeRole](#) or [GetFederationToken](#).

Amazon Transfer Family supports using temporary credentials.

Amazon Transfer Family identity-based policy examples

By default, IAM users and roles don't have permission to create or modify Amazon Transfer Family resources. They also can't perform tasks using the Amazon Web Services Management Console, Amazon CLI, or Amazon API. An IAM administrator must create IAM policies that grant users and roles permission to perform specific API operations on the specified resources they need. The administrator must then attach those policies to the IAM users or groups that require those permissions.

To learn how to create an IAM identity-based policy using these example JSON policy documents, see [Creating policies on the JSON tab](#) in the *Amazon Identity and Access Management User Guide*.

Topics

- [Policy best practices](#)
- [Using the Amazon Transfer Family console](#)
- [Allow users to view their own permissions](#)

Policy best practices

Identity-based policies determine whether someone can create, access, or delete Amazon Transfer Family resources in your account. These actions can incur costs for your Amazon Web Services account. When you create or edit identity-based policies, follow these guidelines and recommendations:

- **Get started with Amazon managed policies and move toward least-privilege permissions** – To get started granting permissions to your users and workloads, use the *Amazon managed policies* that grant permissions for many common use cases. They are available in your Amazon Web Services account. We recommend that you reduce permissions further by defining Amazon customer managed policies that are specific to your use cases. For more information, see [Amazon managed policies](#) or [Amazon managed policies for job functions](#) in the *IAM User Guide*.
- **Apply least-privilege permissions** – When you set permissions with IAM policies, grant only the permissions required to perform a task. You do this by defining the actions that can be taken on specific resources under specific conditions, also known as *least-privilege permissions*. For more information about using IAM to apply permissions, see [Policies and permissions in IAM](#) in the *IAM User Guide*.
- **Use conditions in IAM policies to further restrict access** – You can add a condition to your policies to limit access to actions and resources. For example, you can write a policy condition to

specify that all requests must be sent using SSL. You can also use conditions to grant access to service actions if they are used through a specific Amazon Web Services service, such as Amazon CloudFormation. For more information, see [IAM JSON policy elements: Condition](#) in the *IAM User Guide*.

- **Use IAM Access Analyzer to validate your IAM policies to ensure secure and functional permissions** – IAM Access Analyzer validates new and existing policies so that the policies adhere to the IAM policy language (JSON) and IAM best practices. IAM Access Analyzer provides more than 100 policy checks and actionable recommendations to help you author secure and functional policies. For more information, see [Validate policies with IAM Access Analyzer](#) in the *IAM User Guide*.
- **Require multi-factor authentication (MFA)** – If you have a scenario that requires IAM users or a root user in your Amazon Web Services account, turn on MFA for additional security. To require MFA when API operations are called, add MFA conditions to your policies. For more information, see [Secure API access with MFA](#) in the *IAM User Guide*.

For more information about best practices in IAM, see [Security best practices in IAM](#) in the *IAM User Guide*.

Using the Amazon Transfer Family console

To access the Amazon Transfer Family console, you must have a minimum set of permissions. These permissions must allow you to list and view details about the Amazon Transfer Family resources in your Amazon account. If you create an identity-based policy that is more restrictive than the minimum required permissions, the console won't function as intended for entities (IAM users or roles) with that policy. For more information, see [Adding permissions to a user](#) in the *Amazon Identity and Access Management User Guide*.

You don't need to allow minimum console permissions for users that are making calls only to the Amazon CLI or the Amazon API. Instead, allow access to only the actions that match the API operation that you're trying to perform.

Allow users to view their own permissions

This example shows how you might create a policy that allows IAM users to view the inline and managed policies that are attached to their user identity. This policy includes permissions to complete this action on the console or programmatically using the Amazon CLI or Amazon API.

```
{
```

```

"Version": "2012-10-17",
"Statement": [
  {
    "Sid": "ViewOwnUserInfo",
    "Effect": "Allow",
    "Action": [
      "iam:GetUserPolicy",
      "iam:ListGroupsWithUser",
      "iam:ListAttachedUserPolicies",
      "iam:ListUserPolicies",
      "iam:GetUser"
    ],
    "Resource": ["arn:aws-cn:iam::*:user/${aws:username}"]
  },
  {
    "Sid": "NavigateInConsole",
    "Effect": "Allow",
    "Action": [
      "iam:GetGroupPolicy",
      "iam:GetPolicyVersion",
      "iam:GetPolicy",
      "iam:ListAttachedGroupPolicies",
      "iam:ListGroupPolicies",
      "iam:ListPolicyVersions",
      "iam:ListPolicies",
      "iam:ListUsers"
    ],
    "Resource": "*"
  }
]
}

```

Amazon Transfer Family tag-based policy examples

The following are examples of how to control access to Amazon Transfer Family resources based on tags.

Using tags to control access to Amazon Transfer Family resources

Conditions in IAM policies are part of the syntax that you use to specify permissions to Amazon Transfer Family resources. You can control access to Amazon Transfer Family resources (such as users, servers, roles, and other entities) based on tags on those resources. Tags are key-value pairs.

For more information about tagging resources, see [Tagging Amazon resources](#) in the *Amazon Web Services General Reference*.

In Amazon Transfer Family, resources can have tags, and some actions can include tags. When you create an IAM policy, you can use tag condition keys to control the following:

- Which users can perform actions on an Amazon Transfer Family resource, based on tags that the resource has.
- What tags can be passed in an action's request.
- Whether specific tag keys can be used in a request.

By using tag-based access control, you can apply finer control than at the API level. You also can apply more dynamic control than by using resource-based access control. You can create IAM policies that allow or deny an operation based on tags provided in the request (request tags). You can also create IAM policies based on tags on the resource that is being operated on (resource tags). In general, resource tags are for tags that are already on resources, request tags are for when you're adding tags to or removing tags from a resource.

For the complete syntax and semantics of tag condition keys, see [Controlling access to Amazon resources using resource tags](#) in the *IAM User Guide*. For details about specifying IAM policies with API Gateway, see [Control access to an API with IAM permissions](#) in the *API Gateway Developer Guide*.

Example 1: Deny actions based on resource tags

You can deny an action to be performed on a resource based on tags. The following example policy denies TagResource, UntagResource, StartServer, StopServer, DescribeServer, and DescribeUser operations if the user or server resource is tagged with the key stage and the value prod.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Deny",
      "Action": [
        "transfer:TagResource",
        "transfer:UntagResource",
        "transfer:StartServer",
        "transfer:StopServer",
```

```

        "transfer:DescribeServer",
        "transfer:DescribeUser
    ],
    "Resource": "*",
    "Condition": {
        "StringEquals": {
            "aws:ResourceTag/stage": "prod"
        }
    }
}
]
}

```

Example 2: Allow actions based on resource tags

You can allow an action to be performed on a resource based on tags. The following example policy allows TagResource, UntagResource, StartServer, StopServer, DescribeServer, and DescribeUser operations if the user or server resource is tagged with the key stage and the value prod.

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "transfer:TagResource",
        "transfer:UntagResource",
        "transfer:StartServer",
        "transfer:StopServer",
        "transfer:DescribeServer",
        "transfer:DescribeUser"
      ],
      "Resource": "*",
      "Condition": {
        "StringEquals": {
          "aws:ResourceTag/stage": "prod"
        }
      }
    }
  ]
}

```

Example 3: Deny creation of a user or server based on request tags

The following example policy contains two statements. The first statement denies the `CreateServer` operation on all resources if the cost center key for the tag doesn't have a value.

The second statement denies the `CreateServer` operation if the cost center key for the tag contains any other value besides 1, 2 or 3.

Note

This policy does allow creating or deleting a resource that contains a key called `costcenter` and a value of 1, 2, or 3.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Deny",
      "Action": [
        "transfer:CreateServer"
      ],
      "Resource": [
        "*"
      ],
      "Condition": {
        "Null": {
          "aws:RequestTag/costcenter": "true"
        }
      }
    },
    {
      "Effect": "Deny",
      "Action": "transfer:CreateServer",
      "Resource": [
        "*"
      ],
      "Condition": {
        "ForAnyValue:StringNotEquals": {
          "aws:RequestTag/costcenter": [
            "1",
            "2",
```

```
    "3"  
  ]  
}   
}   
}   
]   
}
```

Troubleshooting Amazon Transfer Family identity and access

Use the following information to help you diagnose and fix common issues that you might encounter when working with Amazon Transfer Family and IAM.

Topics

- [I am not authorized to perform an action in Amazon Transfer Family](#)
- [I am not authorized to perform iam:PassRole](#)
- [I want to allow people outside of my Amazon account to access my Amazon Transfer Family resources](#)

I am not authorized to perform an action in Amazon Transfer Family

If the Amazon Web Services Management Console tells you that you're not authorized to perform an action, then you must contact your administrator for assistance. Your administrator is the person that provided you with your sign-in credentials.

The following example error occurs when the mateojackson IAM user tries to use the console to view details about a *widget* but does not have `transfer:GetWidget` permissions.

```
User: arn:aws-cn:iam::123456789012:user/mateojackson is not authorized to perform:  
transfer:GetWidget on resource: my-example-widget
```

In this case, Mateo asks his administrator to update his policies to allow him to access the *my-example-widget* resource using the `transfer::GetWidget` action.

I am not authorized to perform iam:PassRole

If you receive an error that you're not authorized to perform the `iam:PassRole` action, your policies must be updated to allow you to pass a role to Amazon Transfer Family.

Some Amazon Web Services services allow you to pass an existing role to that service instead of creating a new service role or service-linked role. To do this, you must have permissions to pass the role to the service.

The following example error occurs when an IAM user named `marymajor` tries to use the console to perform an action in Amazon Transfer Family. However, the action requires the service to have permissions that are granted by a service role. Mary does not have permissions to pass the role to the service.

```
User: arn:aws-cn:iam::123456789012:user/marymajor is not authorized to perform:
iam:PassRole
```

In this case, Mary's policies must be updated to allow her to perform the `iam:PassRole` action.

If you need help, contact your Amazon administrator. Your administrator is the person who provided you with your sign-in credentials.

The following example policy contains the permission to pass a role to Amazon Transfer Family.

```
{
  "Version": "2012-10-17",
  "Statement": [
    { "Action": "iam:PassRole",
      "Resource": "arn:aws-cn::iam::123456789012:role/*",
      "Effect": "Allow"
    }
  ]
}
```

I want to allow people outside of my Amazon account to access my Amazon Transfer Family resources

You can create a role that users in other accounts or people outside of your organization can use to access your resources. You can specify who is trusted to assume the role. For services that support resource-based policies or access control lists (ACLs), you can use those policies to grant people access to your resources.

To learn more, consult the following:

- To learn whether Amazon Transfer Family supports these features, see [How Amazon Transfer Family works with IAM](#).

- To learn how to provide access to your resources across Amazon Web Services accounts that you own, see [Providing access to an IAM user in another Amazon Web Services account that you own](#) in the *IAM User Guide*.
- To learn how to provide access to your resources to third-party Amazon Web Services accounts, see [Providing access to Amazon Web Services accounts owned by third parties](#) in the *IAM User Guide*.
- To learn how to provide access through identity federation, see [Providing access to externally authenticated users \(identity federation\)](#) in the *IAM User Guide*.
- To learn the difference between using roles and resource-based policies for cross-account access, see [Cross account resource access in IAM](#) in the *IAM User Guide*.

Compliance validation for Amazon Transfer Family

Third-party auditors assess the security and compliance of Amazon Transfer Family as part of multiple Amazon compliance programs. These include SOC, PCI, HIPAA, and others. For the complete list, see [Amazon Services in Scope by Compliance Program](#).

For a list of Amazon services in scope of specific compliance programs, see [Amazon services in scope by compliance program](#). For general information, see [Amazon compliance programs](#).

You can download third-party audit reports using Amazon Artifact. For more information, see [Downloading reports in Amazon Artifact](#).

Your compliance responsibility when using Amazon Transfer Family is determined by the sensitivity of your data, your company's compliance objectives, and applicable laws and regulations. Amazon provides the following resources to help with compliance:

- [Security and compliance quick start guides](#) – These deployment guides discuss architectural considerations and provide steps for deploying security- and compliance-focused baseline environments on Amazon.
- [Architecting for HIPAA security and compliance whitepaper](#) – This whitepaper describes how companies can use Amazon to create HIPAA-compliant applications.
- – This collection of workbooks and guides might apply to your industry and location.
- [Amazon Config](#) – This Amazon service assesses how well your resource configurations comply with internal practices, industry guidelines, and regulations.

- [Amazon Security Hub](#) – This Amazon service provides a comprehensive view of your security state within Amazon that helps you check your compliance with security industry standards and best practices.

Resilience in Amazon Transfer Family

The Amazon global infrastructure is built around Amazon Regions and Availability Zones. Amazon Regions provide multiple physically separated and isolated Availability Zones, which are connected with low-latency, high-throughput, and highly redundant networking. With Availability Zones, you can design and operate applications and databases that automatically fail over between Availability Zones without interruption. Availability Zones are more highly available, fault tolerant, and scalable than traditional single or multiple data center infrastructures.

Amazon Transfer Family supports up to 3 Availability Zones and is backed by an auto scaling, redundant fleet for your connection and transfer requests.

Note the following:

- For public endpoints:
 - Availability Zone-level redundancy is built into the service
 - There are redundant fleets for each AZ.
 - This redundancy is provided automatically
- For endpoints in a Virtual Private Cloud (VPC), see [Create a server in a virtual private cloud](#).

See also

- For more information about Amazon Web Services Regions and Availability Zones, see [Amazon global infrastructure](#).
- For an example on how to build for higher redundancy and minimize network latency by using Latency-based routing, see the blog post [Minimize network latency with your Amazon Transfer Family servers](#).

Infrastructure security in Amazon Transfer Family

As a managed service, Amazon Transfer Family is protected by Amazon global network security. For information about Amazon security services and how Amazon protects infrastructure, see [Amazon](#)

[Cloud Security](#). To design your Amazon environment using the best practices for infrastructure security, see [Infrastructure Protection](#) in *Security Pillar Amazon Well-Architected Framework*.

You use Amazon published API calls to access Amazon Transfer Family through the network. Clients must support the following:

- Transport Layer Security (TLS). We require TLS 1.2 and recommend TLS 1.3.
- Cipher suites with perfect forward secrecy (PFS) such as DHE (Ephemeral Diffie-Hellman) or ECDHE (Elliptic Curve Ephemeral Diffie-Hellman). Most modern systems such as Java 7 and later support these modes.

Additionally, requests must be signed by using an access key ID and a secret access key that is associated with an IAM principal. Or you can use the [Amazon Security Token Service](#) (Amazon STS) to generate temporary security credentials to sign requests.

Add a web application firewall

Amazon WAF is a web application firewall that helps protect web applications and APIs from attacks. You can use it to configure a set of rules known as a *web access control list* (web ACL) that allow, block, or count web requests based on customizable web security rules and conditions that you define. For more information, see [Using Amazon WAF to protect your APIs](#).

To add Amazon WAF

1. Open the API Gateway console at <https://console.amazonaws.cn/apigateway/>.
2. In the **APIs** navigation pane, and then choose your custom identity provider template.
3. Choose **Stages**.
4. In the **Stages** pane, choose the name of the stage.
5. In the **Stage Editor** pane, choose the **Settings** tab.
6. Do one of the following:
 - Under **Web Application Firewall (WAF)**, for **Web ACL**, choose the web ACL that you want to associate with this stage.
 - If the web ACL you need doesn't exist, you will need to create one by doing the following:
 1. Choose **Create Web ACL**.
 2. On the Amazon WAF service homepage, choose **Create web ACL**.

3. In **Web ACL details**, for **Name**, type the name of the web ACL.
 4. In **Rules**, choose **Add rules**, then choose **Add my own rules and rule groups**.
 5. For **Rule type**, choose IP set to identify a specific list of IP addresses.
 6. For **Rule**, enter the name of the rule.
 7. For **IP set**, choose an existing IP set. To create an IP set, see [Creating an IP set](#).
 8. For **IP address to use as the originating address**, choose **IP address in header**.
 9. For **Header field name**, enter `SourceIP`.
 - 10 For **Position inside header**, choose **First IP address**.
 - 11 For **Fallback for missing IP address**, choose **Match** or **No Match** depending on how you want to handle an invalid (or missing) IP address in the header.
 - 12 For **Action**, choose the action of the IP set.
 - 13 For **Default web ACL action for requests that don't match any rules**, choose **Allow** or **Block** and then click **Next**.
 - 14 For steps 4 and 5, choose **Next**.
 - 15 In **Review and create**, review your choices, and then choose **Create web ACL**.
7. Choose **Save Changes**.
 8. Choose **Resources**.
 9. For **Actions**, choose **Deploy API**.

For information on how secure Transfer Family with Amazon web application firewall, see [Securing Transfer Family with Amazon application firewall and Amazon API Gateway](#) in the Amazon storage blog.

Cross-service confused deputy prevention

The confused deputy problem is a security issue where an entity that doesn't have permission to perform an action can coerce a more-privileged entity to perform the action. In Amazon, cross-service impersonation can result in the confused deputy problem. Cross-service impersonation can occur when one service (the *calling service*) calls another service (the *called service*). The calling service can be manipulated to use its permissions to act on another customer's resources in a way that it should not otherwise have permission to access. To prevent this, Amazon provides tools that help you protect your data for all services with service principals that have been given access

to resources in your account. For a detailed description of this problem, see [the confused deputy problem](#) in the *IAM User Guide*.

We recommend using the [aws:SourceArn](#) and [aws:SourceAccount](#) global condition context keys in resource policies to limit the permissions that Amazon Transfer Family has for the resource. If you use both global condition context keys, the `aws:SourceAccount` value and the account in the `aws:SourceArn` value must use the same account ID when used in the same policy statement.

The most effective way to protect against the confused deputy problem is to use the exact Amazon Resource Name (ARN) of the resource you want to allow. If you are specifying multiple resources, use the `aws:SourceArn` global context condition key with wildcard characters (*) for the unknown portions of the ARN. For example, `arn:aws-cn:transfer::region::account-id:server/*`.

Amazon Transfer Family uses the following types of roles:

- **User role** – Allows service-managed users to access the necessary Transfer Family resources. Amazon Transfer Family assumes this role in the context of a Transfer Family user ARN.
- **Access role** – Provides access to only the Amazon S3 files that are being transferred. For inbound AS2 transfers, the access role uses the Amazon Resource Name (ARN) for the agreement. For outbound AS2 transfers, the access role uses the ARN for the connector.
- **Invocation role** – For use with Amazon API Gateway as the server's custom identity provider. Transfer Family assumes this role in the context of a Transfer Family server ARN.
- **Logging role** – Used to log entries into Amazon CloudWatch. Transfer Family uses this role to log success and failure details along with information about file transfers. Transfer Family assumes this role in the context of a Transfer Family server ARN. For outbound AS2 transfers, the logging role uses the connector ARN.
- **Execution role** – Allows a Transfer Family user to call and launch workflows. Transfer Family assumes this role in the context of a Transfer Family workflow ARN.

For more information, see [Policies and permissions in IAM](#) in the *IAM User Guide*.

Note

In the following examples, replace each *user input placeholder* with your own information.

Note

In our examples, we use both `ArnLike` and `ArnEquals`. They are functionally identical, and therefore you may use either when you construct your policies. Transfer Family documentation uses `ArnLike` when the condition contains a wildcard character, and `ArnEquals` to indicate an exact match condition.

Amazon Transfer Family user role cross-service confused deputy prevention

The following example policy allows any user of any server in the account to assume the role.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {
          "aws:SourceAccount": "account-id"
        },
        "ArnLike": {
          "aws:SourceArn": "arn:aws-cn:transfer:region:account-id:user/*"
        }
      }
    }
  ]
}
```

The following example policy allows any user of a specific server to assume the role.

```
{
  "Version": "2012-10-17",
  "Statement": [
```

```

    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {
          "aws:SourceAccount": "account-id"
        },
        "ArnEquals": {
          "aws:SourceArn": "arn:aws-cn:transfer:region:account-id:user/server-id/*"
        }
      }
    }
  ]
}

```

The following example policy allows a specific user of a specific server to assume the role.

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "ArnLike": {
          "aws:SourceArn": "arn:aws-cn:transfer:region:account-id:user/server-id/user-name"
        }
      }
    }
  ]
}

```

Amazon Transfer Family workflow role cross-service confused deputy prevention

The following example policy allows any workflow in the account to assume the role.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {
          "aws:SourceAccount": "account-id"
        },
        "ArnLike": {
          "aws:SourceArn": "arn:aws-cn:transfer:region:account-id:workflow/*"
        }
      }
    }
  ]
}
```

The following example policy allows a specific workflow to assume the role.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "ArnLike": {
```



```

        "aws:SourceArn": "arn:aws-cn:transfer:region:account-id:workflow/workflow-id"
      }
    }
  ]
}

```

Amazon Transfer Family connector role cross-service confused deputy prevention

The following example policy allows any connector in the account to assume the role.

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {
          "aws:SourceAccount": "account-id"
        },
        "ArnLike": {
          "aws:SourceArn": "arn:aws-cn:transfer:region:account-id:connector/*"
        }
      }
    }
  ]
}

```

The following example policy allows a specific connector to assume the role.

```

{
  "Version": "2012-10-17",
  "Statement": [
    {

```

```

        "Sid": "",
        "Effect": "Allow",
        "Principal": {
            "Service": "transfer.amazonaws.com"
        },
        "Action": "sts:AssumeRole",
        "Condition": {
            "ArnLike": {
                "aws:SourceArn": "arn:aws-cn:transfer:region:account-
id:connector/connector-id"
            }
        }
    ]
}

```

Amazon Transfer Family logging and invocation role cross-service confused deputy prevention

Note

The following examples can be used in both logging and invocation roles. In these examples, you can remove the ARN details for a workflow if your server doesn't have any workflows attached to it.

The following example logging/invoke policy allows any server (and workflow) in the account to assume the role.

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowAllServersWithWorkflowAttached",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {

```

```

        "aws:SourceAccount": "account-id"
    },
    "ArnLike": {
        "aws:SourceArn": [
            "arn:aws-cn:transfer:region:account-id:server/*",
            "arn:aws-cn:transfer:region:account-id:workflow/*"
        ]
    }
}

```

The following example logging/invocation policy allows a specific server (and workflow) to assume the role.

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AllowSpecificServerWithWorkflowAttached",
      "Effect": "Allow",
      "Principal": {
        "Service": "transfer.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {
          "aws:SourceAccount": "account-id"
        },
        "ArnEquals": {
          "aws:SourceArn": [
            "arn:aws-cn:transfer:region:account-id:server/server-id",
            "arn:aws-cn:transfer:region:account-id:workflow/workflow-id"
          ]
        }
      }
    }
  ]
}

```

Amazon managed policies for Amazon Transfer Family

To add permissions to users, groups, and roles, it is easier to use Amazon managed policies than to write policies yourself. It takes time and expertise to [create Amazon Identity and Access Management \(IAM\) customer managed policies](#) that provide your team with only the permissions that they need. To get started quickly, you can use our Amazon managed policies. These policies cover common use cases and are available in your Amazon Web Services account. For more information about Amazon managed policies, see [Amazon managed policies](#) in the *IAM User Guide*. For a detailed listing of all Amazon managed policies, see the [Amazon managed policy reference guide](#).

Amazon services maintain and update Amazon managed policies. You can't change the permissions in Amazon managed policies. Services occasionally add additional permissions to an Amazon managed policy to support new features. This type of update affects all identities (users, groups, and roles) where the policy is attached. Services are most likely to update an Amazon managed policy when a new feature is launched or when new operations become available. Services do not remove permissions from an Amazon managed policy, so policy updates won't break your existing permissions.

Additionally, Amazon supports managed policies for job functions that span multiple services. For example, the `ReadOnlyAccess` Amazon managed policy provides read-only access to all Amazon services and resources. When a service launches a new feature, Amazon adds read-only permissions for new operations and resources. For a list and descriptions of job function policies, see [Amazon managed policies for job functions](#) in the *IAM User Guide*.

Amazon managed policy: `AWSTransferConsoleFullAccess`

The `AWSTransferConsoleFullAccess` policy provides full access to Transfer Family through the Amazon Management Console. For more information, see [Service-linked role for Amazon Transfer Family](#).

Amazon managed policy: `AWSTransferFullAccess`

The `AWSTransferFullAccess` policy provides full access to Transfer Family services. For more information, see [Service-linked role for Amazon Transfer Family](#).

Amazon managed policy: AWSTransferLoggingAccessV3

The `AWSTransferLoggingAccessV3` policy grants administrative permissions that allow logging of your Amazon Transfer Family server activity to Amazon CloudWatch Logs. Therefore, you should attach this policy to a logging role.

Permissions details

This policy includes the following permissions for Amazon CloudWatch Logs.

- `CreateLogStream` – Grants permissions for principals to create a log stream.
- `DescribeLogStreams` – Grants permissions for principals to list the log streams for the log group.
- `CreateLogGroup` – Grants permissions for principals to create log groups.
- `PutLogEvents` – Grants permissions for principals to upload a batch of log events to a log stream.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "logs:CreateLogStream",
        "logs:DescribeLogStreams",
        "logs:CreateLogGroup",
        "logs:PutLogEvents"
      ],
      "Resource": "arn:aws-cn:logs:*:*:log-group:/aws/transfer/*"
    }
  ]
}
```

Amazon managed policy: AWSTransferReadOnlyAccess

The `AWSTransferReadOnlyAccess` policy provides read-only access to Transfer Family services. For more information, see [Service-linked role for Amazon Transfer Family](#).

Amazon Transfer Family updates to Amazon managed policies

View details about updates to Amazon managed policies for Amazon Transfer Family since this service began tracking these changes. For automatic alerts about changes to this page, subscribe to the RSS feed on the [Document history for Amazon Transfer Family](#) page.

Change	Description	Date
Documentation update	Added sections for each of the Transfer Family managed policies.	January 27, 2022
AWSTransferReadOnlyAccess – Update to an existing policy	Amazon Transfer Family added new permissions to allow the policy to read Amazon Managed Microsoft AD.	September 30, 2021
AWSTransferLoggingAccessV3 – Update to an existing policy	AWSTransferLoggingAccessV3 differs from AWSTransferLoggingAccessV2 in that it is marked as a service role policy. This marking indicates that it is intended to give permissions to the Amazon Transfer Family service. There is no functional change.	June 15, 2021
AWSTransferLoggingAccessV2 — Deprecated	This policy has been replaced by AWSTransferLoggingAccessV3 .	June 15, 2021
Amazon Transfer Family started tracking changes	Amazon Transfer Family started tracking changes for its Amazon managed policies.	June 15, 2021

Amazon Transfer Family Terraform module

[HashiCorpTerraform](#) is an open-source Infrastructure as Code (IaC) engine developed using the HashiCorp Configuration Language (HCL). Terraform provides a consistent command line interface (CLI) workflow that, in conjunction with Amazon Transfer Family for the back-end infrastructure, can manage hundreds of cloud services and codify cloud APIs into declarative configuration files.

You can use Terraform to safely deploy Amazon Transfer Family SFTP endpoints backed by Amazon S3, and associated dependencies and customizations.

This automation provides you with a customizable Terraform module and end-to-end examples to create an SFTP endpoint (PUBLIC endpoint type), integrate with Amazon CloudWatch for logging and monitoring, manage user identities for endpoint access, and configure IAM roles for access to Amazon S3 buckets where files are stored. For the repository that contains Terraform code to create the resources required to run Amazon Transfer Family on premises, see the [Terraform Transfer Family module](#) source code on GitHub.

Note

The Amazon Transfer Family module for Terraform is a community supported effort. It is not part of an Amazon service. Best-effort support is provided by the Amazon Storage community.

Troubleshooting Amazon Transfer Family

This chapter provides troubleshooting information for common issues you might encounter when using Amazon Transfer Family. Each section focuses on a specific area of functionality to help you quickly find solutions to your problems.

- For issues with IAM in Transfer Family, see [Troubleshooting Amazon Transfer Family identity and access](#).
- For issues with your Transfer Family web apps, see [Troubleshooting your web apps](#).

Topics

- [Troubleshoot authentication issues](#)
- [Troubleshoot SFTP connectivity and transfer issues](#)
- [Troubleshoot custom identity provider issues](#)
- [Troubleshoot workflow issues](#)
- [Troubleshoot SFTP connector issues](#)
- [Troubleshoot EFS issues](#)
- [Troubleshoot storage and encryption issues](#)
- [Troubleshoot monitoring and alerting issues](#)
- [Troubleshoot cross-region transfer issues](#)
- [Troubleshoot Web Application Firewall integration issues](#)
- [Troubleshoot service-managed user issues](#)
- [Troubleshoot AS2 issues](#)

Troubleshoot authentication issues

This section describes possible solutions for the following authentication issues.

Topics

- [Authentication failures—SSH/SFTP](#)
- [Managed AD mismatched realms issue](#)

- [Active Directory group limits exceeded](#)
- [Miscellaneous authentication issues](#)
- [Troubleshoot Amazon API Gateway issues](#)
- [Troubleshoot testing your identity provider](#)

Authentication failures—SSH/SFTP

Description

When you try to connect to your server using Secure Shell (SSH) File Transfer Protocol (SFTP), you receive a message similar to the following:

```
Received disconnect from 3.130.115.105 port 22:2: Too many authentication failures
Authentication failed.
```

Note

If you are using an API Gateway and receive this error, see [Too many authentication failures](#).

Cause

You have not added an RSA key pair for your user, so you must authenticate using a password instead.

Solution

When you run the `sftp` command, specify the `-o PubkeyAuthentication=no` option. This option forces the system to request your password. For example:

```
sftp -o PubkeyAuthentication=no sftp-user@server-id.server.transfer.region-id.amazonaws.com
```

Managed AD mismatched realms issue

Description

A user's realm and their group realm must match. They must both be in the default realm, or they must both be in the trusted realm.

Cause

If a user and their group do not match, the user cannot be authenticated by Transfer Family. If you test the identity provider for the user, you receive the error No associated access found for user's groups.

Solution

Reference a group in the user's realm that matches the group realm (either default or trusted).

Active Directory group limits exceeded

Description

When attempting to add more Active Directory groups to your Amazon Transfer Family server, you receive an error indicating you've reached the maximum number of groups allowed.

Cause

Amazon Transfer Family has a default limit of 100 Active Directory groups per server.

Solution

These are two possible solutions:

- Consolidate your Active Directory groups to reduce the total number needed.
- If your use case requires more than 100 groups, consider using a custom identity provider solution as described in [Simplify Active Directory authentication with a custom identity provider for Amazon Transfer Family](#).

Miscellaneous authentication issues

Description

You receive an authentication error and none of the other troubleshooting works

Cause

You might have specified a target for a logical directory that contains a leading or trailing slash (/).

Solution

Update your logical directory target, to make sure it begins with a slash, and does not contain a trailing slash. For example, `/amzn-s3-demo-bucket/images` is acceptable, but `amzn-s3-demo-bucket/images` and `/amzn-s3-demo-bucket/images/` are not.

Troubleshoot Amazon API Gateway issues

This section describes possible solutions for the following API Gateway issues.

Topics

- [Too many authentication failures](#)
- [Connection closed](#)

Too many authentication failures

Description

When you try to connect to your server using Secure Shell (SSH) File Transfer Protocol (SFTP), you get the following error:

```
Received disconnect from 3.15.127.197 port 22:2: Too many authentication failures
Authentication failed.
Couldn't read packet: Connection reset by peer
```

Cause

You might have entered an incorrect password for your user. Try again to enter the correct password.

If the password is correct, the issue might be caused by a role Amazon Resource Name (ARN) that is not valid. To confirm that this is the issue, test the identity provider for your server. If you see a response similar to the following, the role ARN is a placeholder only, as indicated by the role ID value of all zeros:

```
{
```

```
"Response": "{\n  \"Role\": \"arn:aws-cn:iam::000000000000:role/MyUserS3AccessRole\",\n  \"HomeDirectory\": \"^/\",\n  \"StatusCode\": 200,\n  \"Message\": \"\",\n  \"Url\": \"https://api-gateway-ID.execute-api.us-east-1.amazonaws.com/prod/servers/transfer-server-ID/users/myuser/config\"\n}
```

Solution

Replace the placeholder role ARN with an actual role that has permission to access the server.

To update the role

1. Open the Amazon CloudFormation console at <https://console.amazonaws.cn/cloudformation>.
2. In the left navigation pane, choose **Stacks**.
3. In the **Stacks** list, choose your stack, and then choose the **Parameters** tab.
4. Choose **Update**. On the **Update stack** page, choose **Use current template**, and then choose **Next**.
5. Replace **UserRoleArn** with a role ARN that has sufficient permissions for accessing your Transfer Family server.

Note

To grant the necessary permissions, you can add the `AmazonAPIGatewayAdministrator` and the `AmazonS3FullAccess` managed policies to your role.

6. Choose **Next**, and then choose **Next** again. On the **Review *stack*** page, select **I acknowledge that Amazon CloudFormation might create IAM resources**, and then choose **Update stack**.

Connection closed

Description

When you try to connect to your server using Secure Shell (SSH) File Transfer Protocol (SFTP), you get the following error:

Connection closed

Cause

One possible cause for this issue is that your Amazon CloudWatch logging role does not have a trust relationship with Transfer Family.

Solution

Make sure that the logging role for the server has a trust relationship with Transfer Family. For more information, see [To establish a trust relationship](#).

Troubleshoot testing your identity provider

Description

If you test your identity provider using the console or the `TestIdentityProvider` API operation, the `Response` field is empty. For example:

```
{
  "Response": "{}",
  "StatusCode": 200,
  "Message": ""
}
```

Cause

The most likely cause is that the authentication failed because of an incorrect user name or password.

Solution

Make sure that you are using the correct credentials for your user, and make updates to the username or password, if necessary.

Troubleshoot SFTP connectivity and transfer issues

This section describes possible solutions for SFTP connectivity and file transfer issues.

Topics

- [Troubleshoot SFTP connectivity issues](#)
- [Troubleshoot SFTP client issues](#)
- [Troubleshoot file upload issues](#)

Troubleshoot SFTP connectivity issues

Description

Your SFTP client cannot initiate the connection. This issue can happen continuously or intermittently. For example, you might see the following sequence of events in your SFTP client debug logs:

```
sftp -vvv username@1.1.1.1
.....
debug1: Local version string .....
kex_exchange_identification: read: Connection reset by peer
Connection reset by 1.1.1.1 port 22
Connection closed.
```

Cause

There is an edge case where the zero-byte TCP ACK (ACK without data), also known as the three-way handshake, is either dropped or delayed.

Solution

As a workaround, Transfer Family offers a solution that uses a different configuration to solve this issue, but may cause compatibility issues with older clients. For that reason, this solution is available only on port 2223.

In the procedure for creating a Transfer Family server in a VPC ([Create a server in a virtual private cloud](#)), when you specify a security group, configure SSH traffic to use port 2223.

Troubleshoot SFTP client issues

SFTP client side messages are described in [SFTP messages](#). The best way to troubleshoot SFTP client issues is to check the SFTP client logs and, if necessary, reach out to your network administrator.

Troubleshoot file upload issues

This section describes possible solutions for the following file upload issues.

Topics

- [Troubleshoot Amazon S3 file upload errors](#)
- [Troubleshoot unreadable file names](#)

Troubleshoot Amazon S3 file upload errors

Description

When you are attempting to upload a file to Amazon S3 storage using Transfer Family, you receive the following error message: Amazon Transfer does not support random access writes to S3 objects.

Cause

When you're using Amazon S3 for your server's storage, Transfer Family does not support multiple connections for a single transfer.

Solution

If your Transfer Family server is using Amazon S3 for its storage, disable any options for your client software that mention using multiple connections for a single transfer.

Troubleshoot unreadable file names

Description

You see corrupted file names in some of your uploaded files. Users sometimes encounter problems with FTP and SFTP transfers that garble certain characters in file names, such as umlauts, accented letters, or certain scripts, such as Chinese or Arabic.

Cause

Although the FTP and SFTP protocols can allow for character encoding of files names to be negotiated by clients, Amazon S3 and Amazon EFS do not. Instead, they require UTF-8 character encoding. As a result, certain characters are not rendered correctly.

Solution

To solve this problem, review your client application for file name character encoding and make sure it is set to UTF-8.

Troubleshoot custom identity provider issues

This section describes possible solutions for issues related to custom identity providers with Transfer Family.

Topics

- [Troubleshoot API Gateway integration errors](#)
- [Troubleshoot Lambda function timeouts](#)
- [Troubleshoot consistent Lambda timeout issues](#)
- [Troubleshoot KeyError exceptions](#)

Troubleshoot API Gateway integration errors

Description

Users cannot authenticate with your Transfer Family server, and when testing your identity provider, you see errors such as:

```
{
  "Response": "",
  "StatusCode": 500,
  "Message": "Internal server error"
}
```

Cause

API Gateway integration errors can occur due to:

- Incorrect API Gateway configuration
- Lambda function errors not being properly handled
- Permission issues between API Gateway and Lambda
- Malformed responses from the Lambda function

Solution

To troubleshoot API Gateway integration errors:

1. Check your Lambda function logs for detailed error information:

- In the CloudWatch console, navigate to **Log groups** > **/aws/lambda/your-function-name**
- Look for error messages or stack traces that indicate the root cause

2. Verify that your Lambda function returns properly formatted responses:

```
{
  "Role": "arn:aws:iam::123456789012:role/TransferUserRole",
  "HomeDirectory": "/mybucket/home/username"
}
```

3. Enable detailed CloudWatch logging for API Gateway:

- In the API Gateway console, select your API and choose **Stages**
- Select your stage and under **Logs/Tracing**, enable **CloudWatch Logs**
- Set the log level to **ERROR** or **INFO**

4. Test your API Gateway endpoint directly:

```
curl -X POST https://your-api-id.execute-api.region.amazonaws.com/prod/servers/your-server-id/users/username/config \
  -H "Content-Type: application/json" \
  -d '{"Password": "password"}
```

5. Verify permissions between API Gateway and Lambda:

- Ensure API Gateway has permission to invoke your Lambda function
- Check that the execution role for your Lambda function has necessary permissions

Troubleshoot Lambda function timeouts

Description

When users attempt to authenticate with your Transfer Family server using a custom identity provider, they experience long delays followed by authentication failures. In your Lambda logs, you see timeout errors.

Cause

Lambda functions used for custom identity providers have a default timeout of 3 seconds. If your authentication logic takes longer than this timeout (for example, when querying external databases or making API calls to third-party identity providers), the function will time out and authentication will fail.

Solution

To resolve Lambda timeout issues:

1. Increase the Lambda function timeout:

- In the Lambda console, navigate to your function and select the **Configuration** tab
- Under **General configuration**, click **Edit**
- Increase the timeout value (up to 15 seconds is recommended for authentication functions)

2. Optimize your Lambda function code:

- Use connection pooling for database queries
- Implement caching for frequently accessed data
- Minimize external API calls during authentication

3. Consider using Lambda Provisioned Concurrency to eliminate cold starts:

```
aws lambda put-provisioned-concurrency-config \  
  --function-name my-authentication-function \  
  --qualifier prod \  
  --provisioned-concurrent-executions 5
```

4. Monitor Lambda performance using CloudWatch metrics and set up alarms for duration thresholds

Troubleshoot consistent Lambda timeout issues

Description

Users experience consistent timeouts when using a Lambda function for authentication.

Cause

Lambda can't reach the corresponding Amazon service used to authenticate (such as DynamoDB, Secrets Manager, or other identity provider).

Solution

Verify that subnets can reach Amazon services. Or, if connecting to an internet identity provider (such as Okta), verify that the Lambda function's subnet can reach the internet via a NAT Gateway

Troubleshoot `KeyError` exceptions

Description

In your Transfer Family log entries, you notice 'KeyError' exceptions.

Cause

The most likely cause is that `user` or `identity_provider` record is malformed or missing required fields.

Solution

Review the ERRORS log, located in `/aws/transfer/your-server-id` log group for clues.

Troubleshoot workflow issues

This section describes possible solutions for issues with managed workflows.

Topics

- [Troubleshoot managed workflows issues](#)
- [Troubleshoot workflow decryption issues](#)

Troubleshoot managed workflows issues

This section describes possible solutions for the following workflow issues.

Topics

- [Troubleshoot workflow-related errors using Amazon CloudWatch](#)
- [Troubleshoot workflow copy errors](#)

Troubleshoot workflow-related errors using Amazon CloudWatch

Description

If you are having issues with your workflows, you can use Amazon CloudWatch to investigate the cause.

Cause

There can be several causes. Use Amazon CloudWatch Logs to investigate.

Solution

Transfer Family emits workflow execution status into CloudWatch Logs. The following types of workflow errors can appear in CloudWatch Logs:

- "type": "StepErrored"
- "type": "ExecutionErrored"
- "type": "ExecutionThrottled"
- "Service failure on starting workflow"

You can filter your workflow's execution logs using different filter and pattern syntax. For example, you can create a log filter in your CloudWatch logs to capture workflow execution logs that contain the **ExecutionErrored** message. For details, see [Real-time processing of log data with subscriptions](#) and [Filter and pattern syntax](#) in the *Amazon CloudWatch Logs User Guide*.

StepErrored

```
2021-10-29T12:57:26.272-05:00
    {"type":"StepErrored","details":
{"errorType":"BAD_REQUEST","errorMessage":"Cannot
tag Efs file","stepType":"TAG","stepName":"successful_tag_step"},
"workflowId":"w-
abcdef01234567890","executionId":"1234abcd-56ef-78gh-90ij-1234klmno567",
"transferDetails":
{"serverId":"s-1234567890abcdef0","username":"lhr","sessionId":"1234567890abcdef0"}}
```

Here, **StepErrored** indicates that a step within the workflow has generated an error. In a single workflow, you can have multiple steps configured. This error tells you in which step the error occurred and provides an error message. In this particular example, the step was configured to tag a file; however, tagging a file in an Amazon EFS file system is not supported, so the step generated an error.

ExecutionErrored

```
2021-10-29T12:57:26.618-05:00
    {"type":"ExecutionErrored","details":{},"workflowId":"w-w-
abcdef01234567890",
    "executionId":"1234abcd-56ef-78gh-90ij-1234klmno567","transferDetails":
{"serverId":"s-1234567890abcdef0",
    "username":"lhr","sessionId":"1234567890abcdef0"}}
```

When a workflow is not able to execute any step, it generates an `ExecutionErrored` message. For example, if you have configured a single step in a given workflow, and if the step is not able to execute, the overall workflow fails.

Executionthrottled

Execution is throttled if a workflow is getting triggered at a rate that is faster than the system can support. This log message indicates that you must slow down your execution rate for workflows. If you are not able to scale down your workflow-execution rate, contact Amazon Web Services Support at [Contact Amazon](#).

Service failure on starting workflow

Anytime you remove a workflow from a server and replace it with a new one, or update server configuration (which impacts a workflow's execution role), you must wait approximately 10 minutes before executing the new workflow. The Transfer Family server caches the workflow details, and it takes 10 minutes for the server to refresh its cache.

Additionally, you must log out of any active SFTP sessions, and then log back in after the 10-minute waiting period to see the changes.

Troubleshoot workflow copy errors

Description

If you're executing a workflow that contains a step to copy the uploaded file, you could encounter the following error:

```
{
  "type": "StepErrored", "details": {
    "errorType": "BAD_REQUEST", "errorMessage": "Bad Request (Service: Amazon S3;
Status Code: 400; Error Code: 400 Bad Request;
    Request ID: request-ID; S3 Extended Request ID: request-ID Proxy: null)",
    "stepType": "COPY", "stepName": "copy-step-name" },
```

```
"workflowId": "workflow-ID",
"executionId": "execution-ID",
"transferDetails": {
  "serverId": "server-ID",
  "username": "user-name",
  "sessionId": "session-ID"
}
}
```

Cause

The source file is in an Amazon S3 bucket that is in a different Amazon Web Services Region than the destination bucket.

Solution

If you're executing a workflow that includes a copy step, make sure that the source and destination buckets are in the same Amazon Web Services Region.

Troubleshoot workflow decryption issues

This section describes possible solutions for the following issues with encrypted workflows.

Topics

- [Troubleshoot error for signed encryption file](#)
- [Troubleshoot error for a FIPS algorithm](#)

Troubleshoot error for signed encryption file

Description

Your decrypt workflow fails and you receive the following error:

```
"Encrypted file with signed message unsupported"
```

Cause

Transfer Family does not currently support signing for encrypted files.

Solution

In your PGP client, if there is an option to sign the encrypted file, make sure to clear the selection, as Transfer Family does not currently support signing for encrypted files.

Troubleshoot error for a FIPS algorithm

Description

Your decrypt workflow fails, and the log message resembles the following:

```
{
  "type": "StepErrored",
  "details": {
    "errorType": "BAD_REQUEST",
    "errorMessage": "File encryption algorithm not supported with FIPS mode
enabled.",
    "stepType": "DECRYPT",
    "stepName": "step-name"
  },
  "workflowId": "workflow-ID",
  "executionId": "execution-ID",
  "transferDetails": {
    "serverId": "server-ID",
    "username": "user-name",
    "sessionId": "session-ID"
  }
}
```

Cause

Your Transfer Family server has FIPS mode enabled and an associated Decrypt workflow step. When encrypting the files before uploading to your Transfer Family server, the encryption client might generate encrypted files that use non-FIPS approved symmetric encryption algorithms. In such a scenario, the workflow is unable to decrypt files. In the following example, **GnuPG** version 2.4.0 is using OCB (a non-FIPS block cipher mode) to encrypt files: this causes the workflow to fail.

Solution

You must edit the GPG key that you used to encrypt your files, and then re-encrypt them. The following procedure describes the steps you must take.

To edit your PGP keys

1. Identify the key that you must edit by running `gpg --list-keys`

This returns a list of keys. Each key has details similar to the following:

```
pub   ed25519 2022-07-07 [SC]
      wJa1rXUtnFEMI/K7MDENG/bPxRfiCYEXAMPLEKEY
uid           [ultimate] Mary Major <marymajor@example.com>
sub   cv25519 2022-07-07 [E]
```

- Identify the key that you want to edit. In the example shown in the previous step, the ID is `wJa1rXUtnFEMI/K7MDENG/bPxRfiCYEXAMPLEKEY`.
- Run `gpg --edit-key wJa1rXUtnFEMI/K7MDENG/bPxRfiCYEXAMPLEKEY`.

The system responds with details about the **GnuPG** program and the specified key.

- At the `gpg>` prompt, enter `showpref`. The following details are returned:

```
[ultimate] (1). Mary Major <marymajor@example.com>
  Cipher: AES256, AES192, AES, 3DES
  AEAD: OCB
  Digest: SHA512, SHA384, SHA256, SHA224, SHA1
  Compression: ZLIB, BZIP2, ZIP, Uncompressed
  Features: MDC, AEAD, Keyserver no-modify
```

Note that the preferred algorithms that are stored on the key are listed.

- We want to edit the key to retain all algorithms except for **OCB**. Run the `setpref` command, specifying all the algorithms to retain:

```
gpg> setpref AES256, AES192, AES, 3DES, SHA512, SHA384, SHA256, SHA224, SHA1, ZLIB,
  BZIP2, ZIP, Uncompressed
```

This returns the following details:

```
Set preference list to:
  Cipher: AES256, AES192, AES, 3DES
  AEAD:
  Digest: SHA512, SHA384, SHA256, SHA224, SHA1
  Compression: ZLIB, BZIP2, ZIP, Uncompressed
  Features: MDC, Keyserver no-modify
Really update the preferences? (y/N)
```

- Enter `y` to update, then enter your password when prompted to confirm the change.

7. Save the changes.

```
gpg> save
```

Before re-running your decrypt workflow, you must re-encrypt your files, using the edited key.

Troubleshoot SFTP connector issues

This section describes possible solutions for issues with SFTP connectors.

Topics

- [Troubleshoot adding trusted host keys for your SFTP connector](#)
- [Key negotiation fails](#)
- [SFTP connector throttling](#)
- [Optimizing SFTP connector performance](#)
- [Miscellaneous SFTP connector issues](#)

Troubleshoot adding trusted host keys for your SFTP connector

Description

When you are creating or editing an SFTP connector, and you are adding a trusted host key, you receive the following error: Failed to edit connector details (Invalid host key format.)

Cause

If you paste in a correct public key, the issue might be that you included the comment portion of the key. Amazon Transfer Family does not currently accept the comment portion of the key.

Solution

Delete the comment portion of the key, when you paste it into the text field. For example, assume your key looks similar to the following:

```
ssh-rsa AAAA...== marymajor@dev-dsk-marymajor-1d-c1234567.us-east-1.amazon.com
```

Remove the text that follows the == characters and only paste in the portion of the key up to and including the ==.

```
ssh-rsa AAAA...==
```

Key negotiation fails

Description

You receive an error where the key exchange negotiation fails. For example:

```
Key exchange negotiation failed due to incompatible host key algorithms.  
Client offered: [ecdsa-sha2-nistp256, ecdsa-sha2-nistp384,  
ecdsa-sha2-nistp521, rsa-sha2-512, rsa-sha2-256] Server offered: [ssh-rsa]
```

Cause

This error is because there's no overlap between the host key algorithms supported by the server and those supported by the connector.

Solution

Ensure that the remote server supports at least one of the Client host key algorithms listed in the error message. For the list of supported algorithms, see [Security policies for Amazon Transfer Family SFTP connectors](#).

SFTP connector throttling

Description

When using SFTP connectors for file transfers, you encounter errors such as:

```
{"type": "ExecutionThrottled", "details": {}, "connectorId": "c-1234567890abcdef0"}
```

Or you notice that file transfers are being delayed or failing intermittently during high-volume operations.

Cause

SFTP connectors have service quotas that limit the number of concurrent file transfers and API operations. When these limits are exceeded, throttling occurs to protect the service and ensure fair usage across all customers.

Solution

To address SFTP connector issues, try the following solutions:

1. Implement exponential backoff and retry logic in your applications. For example, create a function that automatically retries failed operations with increasing wait times between attempts.
2. Implement rate limiting in your application:
 - Limit the number of concurrent transfers.
 - Add delays between batches of transfers.
3. Monitor your usage against service quotas:
 - Use CloudWatch metrics to track API usage.
 - Set up alarms to notify you when approaching quota limits.
4. For options to scale your SFTP connectors, see [Scaling your SFTP connectors](#).
5. If throttling persists and impacts your business operations, request a quota increase through the Service Quotas console.

Optimizing SFTP connector performance

Description

Your SFTP connector transfers are slower than expected or you experience inconsistent performance.

Cause

SFTP connector performance can be affected by various factors including network conditions, file sizes, remote server configuration, and concurrent transfer limits.

Solution

To optimize SFTP connector performance:

- Configure your remote SFTP server for optimal performance:
 - Increase maximum sessions and transfers per session
 - Optimize TCP window sizes for high-latency connections
 - Use compression if supported by both ends

- Consider network optimization, by placing your Transfer Family connector in a region close to your remote SFTP server.
- Implement a monitoring strategy to identify performance bottlenecks:
 - Monitor network throughput and latency
 - Analyze logs for patterns in slow transfers

Miscellaneous SFTP connector issues

Description

You receive an error after you run `StartFileTransfer`, but do not know the cause of the issue, and only the connector ID is returned after the API call.

Cause

This error can have several causes. To troubleshoot, we recommend that you test your connector and search your CloudWatch logs.

Solution

- **Test your connector:** See [Test an SFTP connector](#). If the test fails, the system provides an error message based on the reason the test failed. That section describes how to test your connector from either the console or by using the [TestConnection](#) API command.
- **View CloudWatch logs for your connector:** See [Example log entries for SFTP connectors](#). This topic provides examples for SFTP connector log entries, and the naming convention to help you find the appropriate logs.

Troubleshoot EFS issues

This section describes possible solutions for issues with Amazon EFS storage.

Topics

- [Troubleshoot Amazon EFS issues](#)

Troubleshoot Amazon EFS issues

This section describes possible solutions for the following Amazon EFS issues.

Topics

- [Troubleshoot Amazon EFS service-managed users](#)
- [Troubleshoot missing POSIX profile](#)
- [Troubleshoot logical directories with Amazon EFS](#)

Troubleshoot Amazon EFS service-managed users

Description

You run the `sftp` command and the prompt doesn't appear, and instead you see the following message:

```
Couldn't canonicalize: Permission denied
Need cwd
```

Cause

Your Amazon Identity and Access Management (IAM) user's role does not have permission to access Amazon Elastic File System (Amazon EFS).

Solution

Increase the policy permissions for your user's role. You can add an Amazon managed policy, such as `AmazonElasticFileSystemClientFullAccess`.

Troubleshoot missing POSIX profile

Description

If you're using Amazon EFS storage for your server and you're using a custom identity provider, you must provide your Amazon Lambda function with a POSIX profile.

Cause

One possible cause is that the templates that we provide for creating an Amazon Lambda-backed Amazon API Gateway method do not currently contain POSIX information.

If you did provide POSIX information, the format that you used for providing the POSIX information might not be getting parsed correctly by Transfer Family.

Solution

Make sure that you are providing a JSON element to Transfer Family for the `PosixProfile` parameter.

For example, if you're using Python, you could add the following line where you parse the `PosixProfile` parameter:

```
if PosixProfile:
    response_data["PosixProfile"] = json.loads(PosixProfile)
```

Or, in JavaScript, you could add the following line, where the *uid-value* and *gid-value* are integers, 0 or greater, that represent the User ID (UID) and Group ID (GID) respectively:

```
PosixProfile: {"Uid": uid-value, "Gid": gid-value},
```

These code examples send the `PosixProfile` parameter to Transfer Family as a JSON object, rather than as a string.

Also, within Amazon Secrets Manager, you must store the `PosixProfile` parameter as follows. Replace *your-uid* and *your-gid* with your actual values for the GID and UID.

```
{"Uid": your-uid, "Gid": your-gid, "SecondaryGids": []}
```

Troubleshoot logical directories with Amazon EFS

Description

If the user's home directory does not exist, and they run an `ls` command, the system responds as follows:

```
sftp> ls
remote readdir ("/"): No such file or directory
```

Cause

If your Transfer Family server uses Amazon EFS, the home directory for the user must be created with read and write access before the user can work in their logical home directory. The user cannot create this directory themselves, as they would lack permissions for `mkdir` on their logical home directory.

Solution

A user with administrative access to the parent directory needs to create the user's logical home directory.

Troubleshoot storage and encryption issues

This section describes possible solutions for issues with storage and encryption.

Topics

- [Troubleshoot policies for encrypted Amazon S3 buckets](#)
- [Troubleshoot ResourceNotFound exception](#)

Troubleshoot policies for encrypted Amazon S3 buckets

Description

You have an encrypted Amazon S3 bucket that you are using as storage for your Transfer Family server. If you try to upload a file to the server, you receive the error `Couldn't close file: Permission denied`.

And if you view the server logs, you see the following errors:

```
ERROR Message="Access denied" Operation=CLOSE Path=/bucket/user/test.txt BytesIn=13  
ERROR Message="Access denied"
```

Cause

The policy for your IAM user does not have permission to access the encrypted bucket.

Solution

You must specify additional permissions in your policy to grant the required Amazon Key Management Service (Amazon KMS) permissions. For details, see [Data protection and encryption](#).

Troubleshoot ResourceNotFound exception

Description

You receive an error where the resource cannot be found. For example, if you run `UpdateServer`, you might get the following error:

```
An error occurred (ResourceNotFoundException) when calling the UpdateServer operation:  
Unknown server
```

Cause

There are several reasons for receiving a `ResourceNotFoundException` message. In most cases, the resource that you specified in your API command does not exist. If you did specify an existing resource, then the most probable cause is that your default region is different than the region for your resource. For example, if your default region is **us-east-1**, and your Transfer Family server is in **us-east-2**, you will receive an Unknown resource exception.

For details about setting a default region, see [Quick configuration with `aws configure`](#).

Solution

Add a region parameter to your API command to explicitly specify where to find a particular resource.

```
aws transfer -describe-server --server-id server-id --region us-east-2
```

Troubleshoot monitoring and alerting issues

This section provides information about troubleshooting monitoring and alerting issues with Amazon Transfer Family, including missing or incomplete CloudWatch metrics and missing EventBridge events.

Topics

- [Troubleshoot missing or incomplete CloudWatch metrics](#)
- [Troubleshoot missing EventBridge events](#)

Troubleshoot missing or incomplete CloudWatch metrics

Description

CloudWatch metrics for your Transfer Family servers are missing, incomplete, or not updating as expected.

Cause

Missing or incomplete metrics can be caused by several factors:

- Logging configuration issues
- Low activity levels that don't generate metrics within the expected timeframe
- Viewing metrics with incorrect dimensions or time ranges

Solution

To resolve issues with missing or incomplete CloudWatch metrics:

1. Ensure that logging is properly configured for your Transfer Family server:
 - In the Transfer Family console, check that logging is enabled under **Server details > Additional details > Logging role**.
 - Verify that the logging role has the necessary permissions and trust relationships.
2. When viewing metrics in the CloudWatch console:
 - Use the correct dimensions, for example **ServerId** for server-level metrics
 - Adjust the time range to ensure it covers periods of activity
 - Check that you're in the correct Amazon Web Services Region
3. Generate test activity on your Transfer Family server to ensure metrics are being produced.

Troubleshoot missing EventBridge events

Description

You've configured Amazon EventBridge rules to capture Transfer Family events, but events are not being delivered to your target destinations or triggering expected actions.

Cause

Missing EventBridge events can be caused by:

- Incorrectly configured event patterns
- Permission issues with event targets
- Service limits or throttling
- Events not being generated due to server configuration

Solution

To troubleshoot missing EventBridge events:

1. Verify your event pattern is correctly formatted to match Transfer Family events:

```
{
  "source": ["aws.transfer"],
  "detail-type": ["Transfer State Change"],
  "detail": {
    "serverId": ["s-1234567890abcdef0"]
  }
}
```

2. Check that your event target has the necessary permissions:

- For Lambda targets, ensure the Lambda function's resource policy allows EventBridge to invoke it
- For SQS targets, verify the queue policy allows EventBridge to send messages
- For SNS targets, confirm the topic policy permits EventBridge to publish to it

3. Test your rule by generating sample events:

- Use the EventBridge console to create a test event that matches your pattern
- Perform actions on your Transfer Family server that should generate events

4. Enable EventBridge rule metrics to monitor rule invocations and failures:

```
aws events put-rule --name "TransferStateChangeRule" --event-pattern '{...}' --state
ENABLED --metrics-enabled
```

5. Check CloudWatch Logs for any error messages related to event delivery failures

Troubleshoot cross-region transfer issues

This section describes possible solutions for issues related to transferring files across Amazon Web Services Regions.

Topics

- [Troubleshoot cross-region transfer permission issues](#)
- [Troubleshoot cross-region transfer performance issues](#)

Troubleshoot cross-region transfer permission issues

Description

When attempting to transfer files between Amazon S3 buckets in different regions using Transfer Family workflows, you encounter errors such as:

```
{
  "type": "StepErrored",
  "details": {
    "errorType": "BAD_REQUEST",
    "errorMessage": "Access Denied (Service: Amazon S3; Status Code: 403; Error Code: AccessDenied)",
    "stepType": "COPY",
    "stepName": "cross_region_copy"
  }
}
```

Cause

Cross-region transfers require specific IAM permissions for both the source and destination buckets. The IAM role used by your Transfer Family server or workflow may not have sufficient permissions to access buckets in other regions.

Solution

To resolve cross-region transfer permission issues:

1. Ensure your IAM role has permissions for both source and destination buckets:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "s3:GetObject",
        "s3:GetObjectVersion"
      ],
      "Resource": "arn:aws:s3:::source-bucket-name/*"
    },
    {
      "Effect": "Allow",
```

```

    "Action": [
      "s3:PutObject",
      "s3:PutObjectAcl"
    ],
    "Resource": "arn:aws:s3:::destination-bucket-name/*"
  }
]
}

```

2. If using KMS encryption, add permissions for both the source and destination KMS keys:

```

{
  "Effect": "Allow",
  "Action": [
    "kms:Decrypt",
    "kms:GenerateDataKey"
  ],
  "Resource": [
    "arn:aws:kms:source-region:account-id:key/source-key-id",
    "arn:aws:kms:destination-region:account-id:key/destination-key-id"
  ]
}

```

3. Verify that bucket policies in both regions allow access from your Transfer Family server's IAM role
4. For cross-account transfers, ensure proper cross-account permissions are configured

Troubleshoot cross-region transfer performance issues

Description

Cross-region transfers are significantly slower than expected or time out during large file transfers.

Cause

Cross-region transfers inherently involve greater latency and may be affected by network conditions, file sizes, and service limits. Large files or high volumes of small files can experience performance degradation.

Solution

To improve cross-region transfer performance:

- For large files, consider using Amazon S3 Transfer Acceleration:

```
aws s3 cp --source-region us-east-1 --region us-west-2 \  
s3://source-bucket/large-file.zip s3://destination-bucket/large-file.zip \  
--acl bucket-owner-full-control --s3-accelerate
```

- For multiple small files, batch them together before transfer:
 - Use compression to combine multiple files
 - Use Amazon S3 batch operations for large-scale transfers
- Consider using Transfer Family SFTP connectors with appropriate timeout settings for large transfers
- For recurring transfers, consider replicating data using Amazon S3 Cross-Region Replication (CRR) instead of ad-hoc transfers
- Monitor transfer performance using Amazon CloudWatch metrics to identify bottlenecks

Troubleshoot Web Application Firewall integration issues

This section describes possible solutions for issues related to integrating Amazon WAF with Transfer Family.

Topics

- [Troubleshoot WAF blocking legitimate traffic](#)
- [Troubleshoot WAF integration with custom identity providers](#)

Troubleshoot WAF blocking legitimate traffic

Description

After configuring Amazon WAF with your Transfer Family endpoint, legitimate users are unable to connect or experience intermittent connection failures. You may see HTTP 403 (Forbidden) responses in your logs.

Cause

Your Amazon WAF rules may be too restrictive or incorrectly configured, causing false positives that block legitimate traffic. Common causes include:

- IP-based rules that inadvertently block corporate networks or VPNs
- Rate-based rules with thresholds that are too low for your normal traffic patterns
- Managed rule groups that are overly aggressive for your use case

Solution

To resolve false positive issues:

1. Enable Amazon WAF logging to identify which rules are triggering the blocks. For instructions, see [Logging Amazon WAF web ACL traffic](#).
2. Review your logs to identify patterns in the blocked requests.
3. Adjust your rules by:
 - Adding IP addresses or ranges to an allowlist
 - Increasing rate limits for rate-based rules
 - Setting specific rules to Count mode instead of Block mode to monitor without blocking
 - Creating exceptions for specific rules using rule group exclusions
4. Test the updated configuration with a representative sample of legitimate traffic before fully deploying.

Troubleshoot WAF integration with custom identity providers

Description

After configuring Amazon WAF with your Transfer Family server that uses a custom identity provider, authentication fails or users experience intermittent authentication issues.

Cause

When using a custom identity provider with API Gateway, Amazon WAF rules may interfere with the API calls between Transfer Family and your identity provider. This can happen because Amazon WAF is inspecting and potentially blocking the API traffic based on its rule sets.

Solution

To resolve issues with Amazon WAF and custom identity providers:

- Ensure that your Amazon WAF configuration includes exceptions for the API Gateway endpoints used by your custom identity provider.

- Add the Transfer Family service principal (transfer.amazonaws.com) to an allowlist in your Amazon WAF rules.
- If using managed rule groups, review them for rules that might affect API authentication flows and consider disabling those specific rules.
- Test your identity provider directly using the `TestIdentityProvider` API operation to verify it works correctly without Amazon WAF interference.

Troubleshoot service-managed user issues

This section describes possible solutions for issues with service-managed users.

Topics

- [Troubleshoot service-managed users](#)

Troubleshoot service-managed users

This section describes possible solutions for the following issues.

Topics

- [Troubleshoot public key body too long](#)
- [Troubleshoot failed to add SSH public key](#)

Troubleshoot public key body too long

Description

When you try to create a service-managed user, you receive the following error:

```
Failed to create user (1 validation error detected:  
'sshPublicKeyBody' failed to satisfy constraint: Member must have length less than or  
equal to 2048)
```

Cause

You might be entering a PGP key for the public key body, and Amazon Transfer Family does not support PGP keys for service-managed users.

Solution

If the PGP key is RSA-based, you can convert it to PEM format. For example, Ubuntu provides a conversion tool here: <https://manpages.ubuntu.com/manpages/xenial/man1/openpgp2ssh.1.html>

Troubleshoot failed to add SSH public key

Description

When you try to add a public key for a service-managed user, you receive the following error:

```
Failed to add SSH public key (Unsupported or invalid SSH public key format)
```

Cause

You might be attempting to import an SSH2-formatted public key, and Amazon Transfer Family does not support SSH2-formatted public keys for service-managed users.

Solution

You need to convert the key into OpenSSH format. This process is described in [Converting an SSH2 key to SSH public key format](#).

Troubleshoot AS2 issues

This section describes possible solutions for issues with AS2 transfers.

Topics

- [Troubleshoot AS2 issues](#)
- [AS2 certificate issues](#)
- [AS2 MDN receipt issues](#)

Troubleshoot AS2 issues

[AS2 error codes](#), messages and troubleshooting tips for Applicability Statement 2 (AS2)-enabled servers are described in the AS2 failure codes section in this guide.

AS2 certificate issues

Description

You're experiencing certificate-related errors with AS2 transfers.

Cause

Common causes include expired certificates, incorrect certificate formats, or mismatched certificate chains.

Solution

Try the following solutions:

- Verify that your certificates are not expired
- Ensure certificates are in the correct format (PEM for Amazon Transfer Family)
- Check that the certificate chain is complete and valid
- Confirm that the signing and encryption certificates match between trading partners
- Rotate certificates well before expiration to avoid interruptions

AS2 MDN receipt issues

Description

You're not receiving expected Message Disposition Notifications (MDNs) for AS2 transfers.

Cause

MDN issues can occur due to network connectivity problems, incorrect endpoint configurations, or MDN format mismatches.

Solution

Consider these solutions:

- Verify that the MDN URL is correctly configured and accessible
- Check network connectivity between the AS2 server and the MDN endpoint
- Ensure that both trading partners are configured for the same MDN type (synchronous or asynchronous)
- Review AS2 logs for any errors related to MDN processing
- If using synchronous MDNs, verify that timeouts are set appropriately

Amazon Transfer Family API Reference

The complete API Reference guide for Transfer Family is available at [Amazon Transfer Family API Reference](#).

Amazon Transfer Family is a secure transfer service that you can use to transfer files into and out of Amazon Simple Storage Service (Amazon S3) storage over the following protocols:

- Secure Shell (SSH) File Transfer Protocol (SFTP)
- File Transfer Protocol Secure (FTPS)
- File Transfer Protocol (FTP)
- Applicability Statement 2 (AS2)

Servers, users, and roles are all identified by their Amazon Resource Name (ARN). You can assign tags, which are key-value pairs, to entities with an ARN. Tags are metadata that can be used to group or search for these entities. One example where tags are useful is for accounting purposes.

The following conventions are observed in Amazon Transfer Family ID formats:

- `ServerId` values take the form `s-01234567890abcdef`.
- `SshPublicKeyId` values take the form `key-01234567890abcdef`.

Amazon Resource Name (ARN) formats take the following form:

- For servers, ARNs take the form `arn:aws-cn:transfer:region:account-id:server/server-id`.

An example of a server ARN is: `arn:aws-cn:transfer:us-east-1:123456789012:server/s-01234567890abcdef`.

- For users, ARNs take the form `arn:aws-cn:transfer:region:account-id:user/server-id/username`.

An example is `arn:aws-cn:transfer:us-east-1:123456789012:user/s-01234567890abcdef/user1`.

DNS entries (endpoints) in use are as follows:

- API endpoints take the form `transfer.region.amazonaws.com`.
- Server endpoints take the form `server.transfer.region.amazonaws.com`.

This API interface reference for Amazon Transfer Family contains documentation for a programming interface that you can use to manage Amazon Transfer Family. The reference structure is as follows:

- For the alphabetical list of API actions, see [Actions](#).
- For the alphabetical list of data types, see [Types](#).
- For a list of common query parameters, see [Common Parameters](#).
- For descriptions of the error codes, see [Common Errors](#).

 **Tip**

Rather than actually running a command, you can use the `--generate-cli-skeleton` parameter with any API call to generate and display a parameter template. You can then use the generated template to customize and use as input on a later command. For details, see [Generate and use a parameter skeleton file](#).

Document history for Amazon Transfer Family

The following table describes the documentation for this release of Amazon Transfer Family.

- **API version:** transfer-2018-11-05
- **Latest documentation update:** April 9, 2025

Change	Description	Date
Enhancements to the SFTP connectors user experience	<ul style="list-style-type: none"> • Ability to self-serve concurrent connections setting for your connectors • Ability to provide SSH private key in OpenSSH format that is used for authenticating connections • Ability to discover the public host key of remote servers using their SFTP connectors <p>For details, see Create an SFTP connector.</p>	April 9, 2025
Ability for SFTP connectors to delete, rename, and move files on the remote SFTP server	<p>You can now organize your files stored on remote SFTP servers by deleting, renaming or moving source files to archive locations after they have been copied from the remote server.</p> <p>For details, see Move or rename files or directories on the remote SFTP server.</p>	April 7, 2025

Change	Description	Date
Support for Amazon Transfer Family web apps	Amazon Transfer Family web apps are a new resource customers can use to create a simple interface for accessing their data in Amazon S3 through a web browser. For details, see Transfer Family web apps .	December 1, 2024
Moved API Reference into a separate guide	To improve the customer experience, the API Reference is now published separately from the user guide. For the separate API reference, see Welcome to the Amazon Transfer Family API .	July 31, 2024
Ability for SFTP connectors to list remote files and directories	Transfer Family has added the ability for our customers to use SFTP connectors to list files stored in remote SFTP servers. For details, see List contents of a remote directory	April 23, 2024
Ability to use a trading partner's self-signed TLS certificate with AS2 message exchange	Amazon Transfer Family has added the option to import and use a trading partner's public, self-signed TLS certificate for sending Applicability Statement 2 (AS2) messages to their server over HTTPS .	April 12, 2024

Change	Description	Date
Addition of security policies for SFTP connectors	Amazon Transfer Family has added security policies for use with SFTP connectors. For details, see Security policies for Amazon Transfer Family SFTP connectors .	April 5, 2024
Integrate with Amazon EventBridge	Amazon Transfer Family now automatically publishes events to Amazon EventBridge for all file transfer operations. For details, see Managing Transfer Family events using Amazon EventBridge .	February 8, 2024
Addition of new security policies	Amazon Transfer Family has added new FIPS and non-FIPS security policies. Also, the default security policy assigned to servers is always the latest security policy. For details, see Security policies for Amazon Transfer Family servers .	February 5, 2024

Change	Description	Date
Support for static IP addresses for SFTP connectors and AS2	Transfer Family now provides static IP addresses for SFTP connectors and AS2. This enables connection with remote SFTP servers that are secured by IP allowlisting controls. For AS2, we're introducing static IP addresses for asynchronous MDN responses from AS2 servers.	January 16, 2024
The user guide has been reorganized to align more closely with the latest version of Amazon Transfer Family.	Transfer Family has added multiple features since the guide originated, necessitating a restructuring of the guide.	January 3, 2024
Logical directory mappings enhancements Amazon S3 list performance optimization	Transfer Family now supports logical directory mappings up to 2.1 MB. You can also now declare whether a user mapping is to a file. For more information, see Rules for using logical directories . When creating or updating a server that uses Amazon S3 for storage, you can now optimize the performance of listing your S3 directories (or folders). For more information, see Configuring an SFTP, FTPS, or FTP server endpoint .	November 17, 2023

Change	Description	Date
Alternate port for SFTP servers with virtual private cloud (VPC) endpoints	You can now enable an alternate nonstandard port for your SFTP Transfer Family servers that have VPC endpoints. For more information, see Create a server in a virtual private cloud .	November 17, 2023
Support for SFTP connectors	SFTP Connectors extend the capabilities of Amazon Transfer Family to communicate with remote servers both in the cloud and on-premises. For more information, see Using SFTP connectors .	July 25, 2023
Support for AS2 Basic authentication	Transfer Family now supports using Basic authentication for servers that use the Applicability Statement 2 (AS2) protocol. For more information, see Basic authentication for AS2 connectors .	June 30, 2023
Support for structured JSON logging	Transfer Family now supports delivering structured JSON logs to Amazon CloudWatch, grouping log streams into custom log groups, and performing common log queries across protocols. For more information, see Amazon CloudWatch logging for Amazon Transfer Family servers .	June 24, 2023

Change	Description	Date
Support for multiple methods of authentication	Transfer Family has support for authenticating by using a password, a public/private key pair, or both. This is available for servers that use the SFTP protocol and a custom identity provider. For more information, see Create an SFTP-enabled server .	May 17, 2023
Support for Pretty Good Privacy (PGP) decryption with files that Transfer Family processes with workflows	Transfer Family has built-in support for Pretty Good Privacy (PGP) decryption. You can use PGP decryption on files that are uploaded over SFTP, FTPS, or FTP to Amazon Simple Storage Service (Amazon S3) or Amazon Elastic File System (Amazon EFS). For more information, see Generate PGP keys and Use PGP decryption in your workflow .	December 21, 2022
Fully managed support for Applicability Statement 2 (AS2) file transfer protocol with Transfer Family servers	You can create servers that use the AS2 protocol for sending and receiving information to and from trading partners who are inside or outside the Amazon environment. For more information, see Configuring AS2 .	July 25, 2022

Change	Description	Date
Support for display banners when creating a server	You can add customized messages when you create servers. You can display a pre-authentication message (all protocols), and a post-authentication message (for FTP and FTPS servers). For more information, see Create an SFTP-enabled server , Create an FTPS-enabled server , or Create an FTP-enabled server .	February 17, 2022
Support for Amazon Lambda as an identity provider	You can now connect to a custom identity provider using Amazon Lambda with their Transfer Family servers. Previously, you had to supply an Amazon API Gateway URL to integrate a custom identity provider. For more information, see Using Amazon Lambda to integrate your identity provider .	November 16, 2021
Support for Managed File Transfer Workflows	Managed File Transfer Workflows provide you with post-upload processing abstractions for the common tasks that you currently perform manually. For more information, see Amazon Transfer Family managed workflows .	September 2, 2021

Change	Description	Date
AWSTransferLoggingAccessV3 – New policy	Amazon Transfer Family added a new managed policy, <code>AWSTransferLoggingAccessV3</code> , and deprecated the policy <code>AWSTransferLoggingAccessV2</code> .	June 15, 2021
Support for Amazon Directory Service for Microsoft Active Directory	In addition to service managed and custom identity providers, you can now use Amazon Directory Service for Microsoft Active Directory to manage user access for authentication and authorization. For more information, see Using Amazon Directory Service for Microsoft Active Directory .	May 24, 2021
New Amazon Web Services Regions	Amazon Transfer Family is now available in the Africa (Cape Town) Region. For more information about Transfer Family endpoints, see Amazon Transfer Family endpoints and quotas in the <i>Amazon Web Services General Reference</i> .	February 24, 2021

Change	Description	Date
New Amazon Web Services Regions	Amazon Transfer Family is now available in the Asia Pacific (Hong Kong) and Middle East (Bahrain) Regions. For more information about Transfer Family endpoints, see Amazon Transfer Family endpoints and quotas in the <i>Amazon Web Services General Reference</i> .	February 17, 2021
Support for Amazon EFS as a data store	Transfer Family now supports file transfers into and out of Amazon Elastic File System (Amazon EFS). Amazon EFS is a simple, scalable, fully managed elastic NFS file system. For more information, see Configure an Amazon EFS file system .	January 06, 2021
Support for Amazon WAF	Transfer Family now supports Amazon WAF, a web application firewall that helps protect web applications and API operations from attacks. For more information, see Add a web application firewall .	November 24, 2020
Support for multiple security groups in a virtual private cloud (VPC)	You can now attach multiple security groups to a server in a VPC. For more information, see Create a server in a virtual private cloud .	October 15, 2020

Change	Description	Date
New Amazon Web Services Regions	Transfer Family is now available in the Amazon GovCloud (US) Regions. For more information about Transfer Family endpoints for Amazon GovCloud (US) Regions, see Amazon Transfer Family endpoints and quotas in the <i>Amazon Web Services General Reference</i> . For information about using Transfer Family in the Amazon GovCloud (US) Regions, see Amazon Transfer Family in the <i>Amazon GovCloud (US) User Guide</i> .	September 30, 2020
A security policy with supported cryptographic algorithms can now be attached to your server	You can now attach a security policy that contains a set of supported cryptographic algorithms to your server. For more information, see Security policies for Amazon Transfer Family servers .	August 12, 2020

Change	Description	Date
Support for Federal Information Processing Standard (FIPS) endpoints	FIPS-enabled endpoints are now available in North American Amazon Web Services Regions. For available Regions, see Amazon Transfer Family endpoints and quotas in the <i>Amazon Web Services General Reference</i> . To enable FIPS for an SFTP-enabled server endpoint, see Create an SFTP-enabled server . To enable FIPS for an FTPS-enabled server endpoint, see Create an FTPS-enabled server . To enable FIPS for an FTP-enabled server endpoint, see Create an FTP-enabled server .	August 12, 2020
Username character-length increase and additional allowed characters	Usernames can now contain at signs (@) and periods (.), and can be a maximum length of 100 characters. To add a user, see Managing users for server endpoints .	August 12, 2020
Support for automatic Amazon CloudWatch logging Amazon Identity and Access Management (IAM) role creation	Transfer Family now supports automatic creation of a CloudWatch logging IAM role to view end-user activity. For more information, see Create an SFTP-enabled server , Create an FTPS-enabled server , or Create an FTP-enabled server .	July 30, 2020

Change	Description	Date
Amazon Transfer Family now supports Source IP as a factor for authorization.	Transfer Family adds support for using end users' source IP addresses as a factor for authorization, enabling you to apply an additional layer of security when authorizing access over Secure File Transfer Protocol (SFTP), File Transfer Protocol over SSL (FTPS), or File Transfer Protocol (FTP). For more information, see Working with custom identity providers .	June 9, 2020
Amazon Transfer for SFTP is now Amazon Transfer Family and adds support for FTP and FTPS.	You can now use two additional protocols for your users' file transfers: File Transfer Protocol Secure (FTPS) and File Transfer Protocol (FTP). Users can move, run, secure, and integrate FTP over SSL (FTPS) and plaintext FTP based workflows in Amazon, in addition to existing Secure File Transfer Protocol (SFTP) support.	April 23, 2020

Change	Description	Date
Support for virtual private cloud (VPC) security groups and Elastic IP addresses	You can now create an allowlist for incoming IP addresses using security groups, providing an additional layer of security for servers. You can also associate Elastic IP addresses with your server's endpoint. By doing this, you can enable users behind firewalls to allow access to that endpoint. For more information, see Create a server in a virtual private cloud .	January 10, 2020
Support for working in a VPC	You can now create a server in a VPC. You can use your server to transfer data over your client to and from an Amazon S3 bucket without going over the public internet. For more information, see Create a server in a virtual private cloud .	March 27, 2019
First version of Amazon Transfer Family released.	This initial release includes setting up directions, describes how to get started, and provides information on client configuration, user configuration, and monitoring activity.	November 25, 2018