

Amazon IoT SiteWise Monitor



Amazon IoT SiteWise Monitor: Application Guide

Table of Contents

What is Amazon IoT SiteWise Monitor?	1
SiteWise Monitor roles	2
SiteWise Monitor concepts	5
Getting started	7
Signing in to a portal	8
Navigation	9
Getting started as a portal administrator	9
Exploring asset data and adding assets to projects	10
Assigning owners to the project	13
Getting started as a project owner	15
Exploring project assets and their data	16
Creating dashboards to visualize data	17
Configuring visualizations to understand data	18
Assigning viewers to the project	23
Getting started as a project viewer	25
Exploring shared dashboards	26
Exploring project assets and their data	28
Exploring assets	30
Viewing asset data	31
Adding assets to projects	33
Adding assets to a new project	33
Adding assets to an existing project	36
Removing assets from a project	37
Adding properties and alarms to dashboards	38
Sharing data with projects	41
Creating projects	42
Creating a new project	42
Viewing project details	43
Adding assets to projects	44
Adding assets to a new project	44
Adding assets to an existing project	47
Removing assets from a project	48
Assigning project owners	49
Assigning project viewers	52


Changing project details	55
Deleting projects	56
Visualizing data with dashboards	58
Viewing dashboards	59
Adjusting the dashboard time range	61
Creating dashboards	63
Adding visualizations	65
Editing a dashboard	65
Dragging a property or alarm to a dashboard	66
Customizing visualizations	69
Changing visualization types	69
Adding data to a visualization	70
Removing data from a visualization	71
Deleting a visualization	73
Choosing visualization types	73
Configuring thresholds	81
Configuring trend lines	84
Adjusting dashboard layout	87
Deleting dashboards	88
Monitoring with alarms	91
Creating alarm definitions	93
Viewing alarm details	95
Responding to alarms	96
Acknowledging alarms	97
Snoozing alarms	98
Configuring alarms	100
Visualizing alarms in dashboards	102
Keyboard and mouse shortcuts	103
Document history	104

What is Amazon IoT SiteWise Monitor?

Amazon IoT SiteWise Monitor is a feature of Amazon IoT SiteWise that provides portals in the form of managed web applications. You can use these applications to view and share your operational data and alarms. You can see data from your processes, devices, and equipment that are connected to Amazon IoT SiteWise. Domain experts, such as process engineers, can use these portals to quickly get insights into their operational data to understand device and equipment behavior. They can use these insights to improve efficiency of devices, processes, or equipment and innovate on new initiatives. Operators can monitor data with alarms and respond to alarms when devices and equipment perform sub-optimally.

Because Amazon IoT SiteWise captures data over time, you can use Amazon IoT SiteWise Monitor to view operational data over time. With Amazon IoT SiteWise Monitor, you can uncover insights that might otherwise be difficult to find.

The following is an example dashboard that displays data for a wind farm.

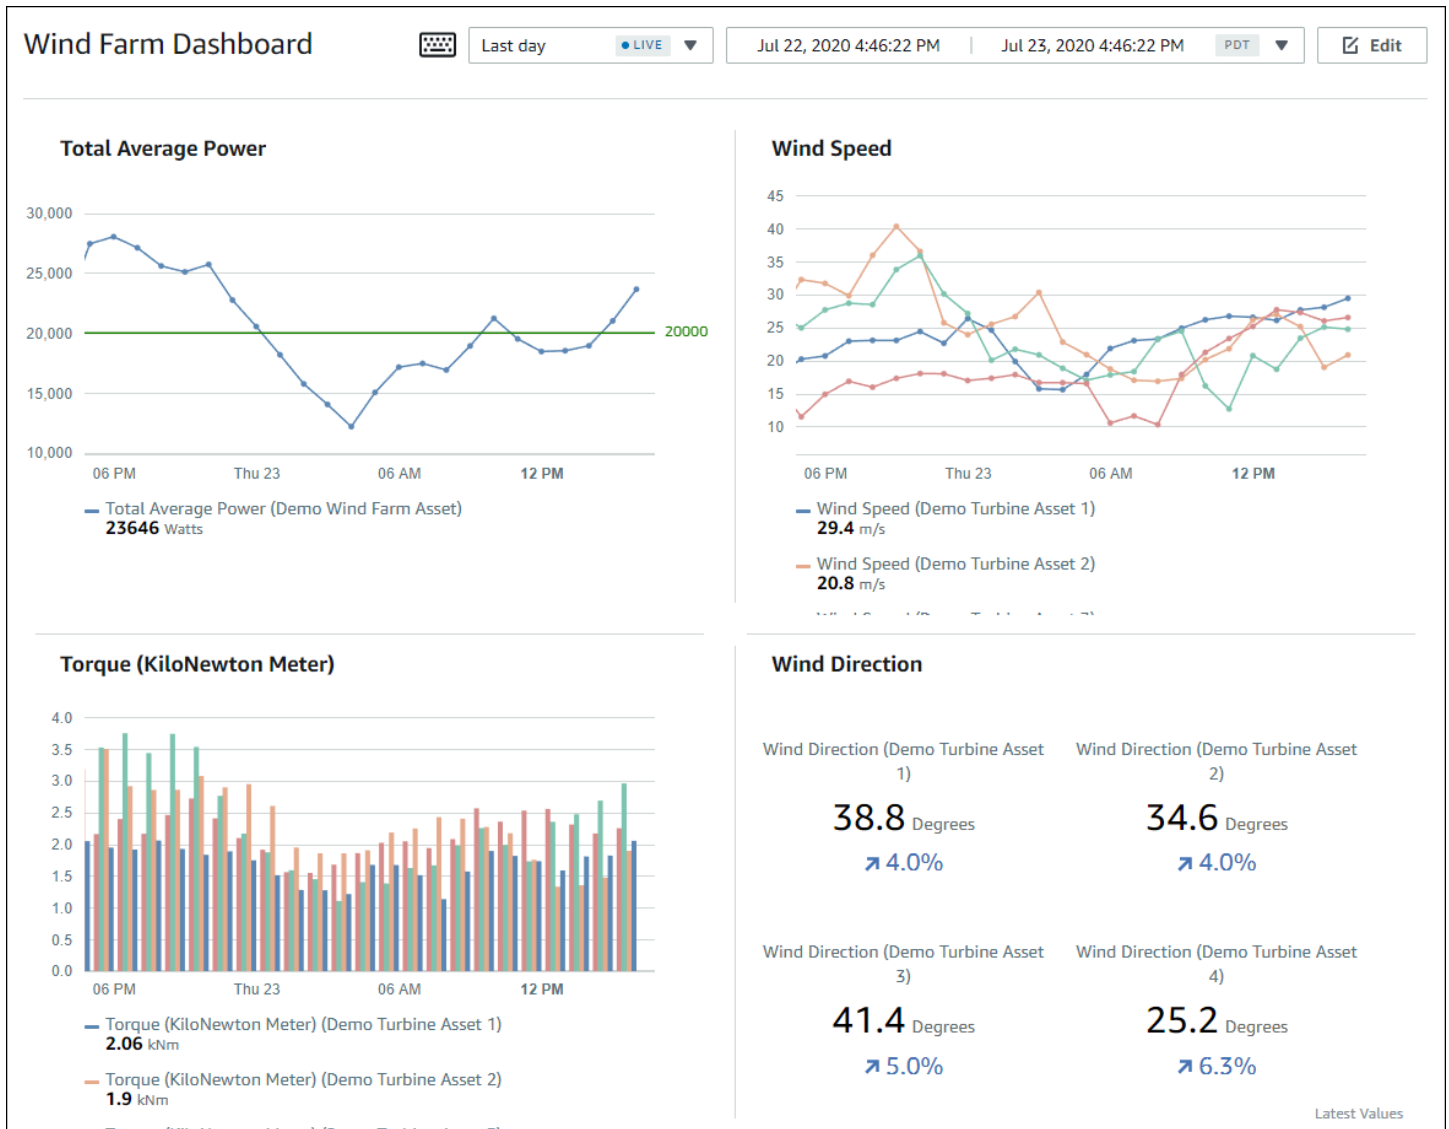

SiteWise Monitor roles

Three roles use Amazon IoT SiteWise Monitor portals:

Portal administrator

Each SiteWise Monitor portal has one or more portal administrators. Portal administrators use the portal to create projects that contain collections of assets and dashboards. The portal administrator then assigns assets and owners to each project. By controlling access to the project, portal administrators specify which assets that project owners and viewers can see.

Project owner


Each SiteWise Monitor project has owners. Project owners create visualizations in the form of dashboards to represent operational data in a consistent manner. When dashboards are ready to share, the project owner can invite viewers to the project. Project owners can also assign other owners to the project. Project owners can configure thresholds and notification settings for alarms.

Project viewer

Each SiteWise Monitor project has viewers. Project viewers can connect to the portal to view the dashboards that project owners created. In each dashboard, project viewers can adjust the time range to better understand operational data. Project viewers can only view dashboards in the projects to which they have access. Project viewers can acknowledge and snooze alarms.

Depending on your organization, the same person might perform multiple roles.

The following image illustrates how these three roles, in addition to the Amazon administrator who creates portals, interact in a SiteWise Monitor portal.

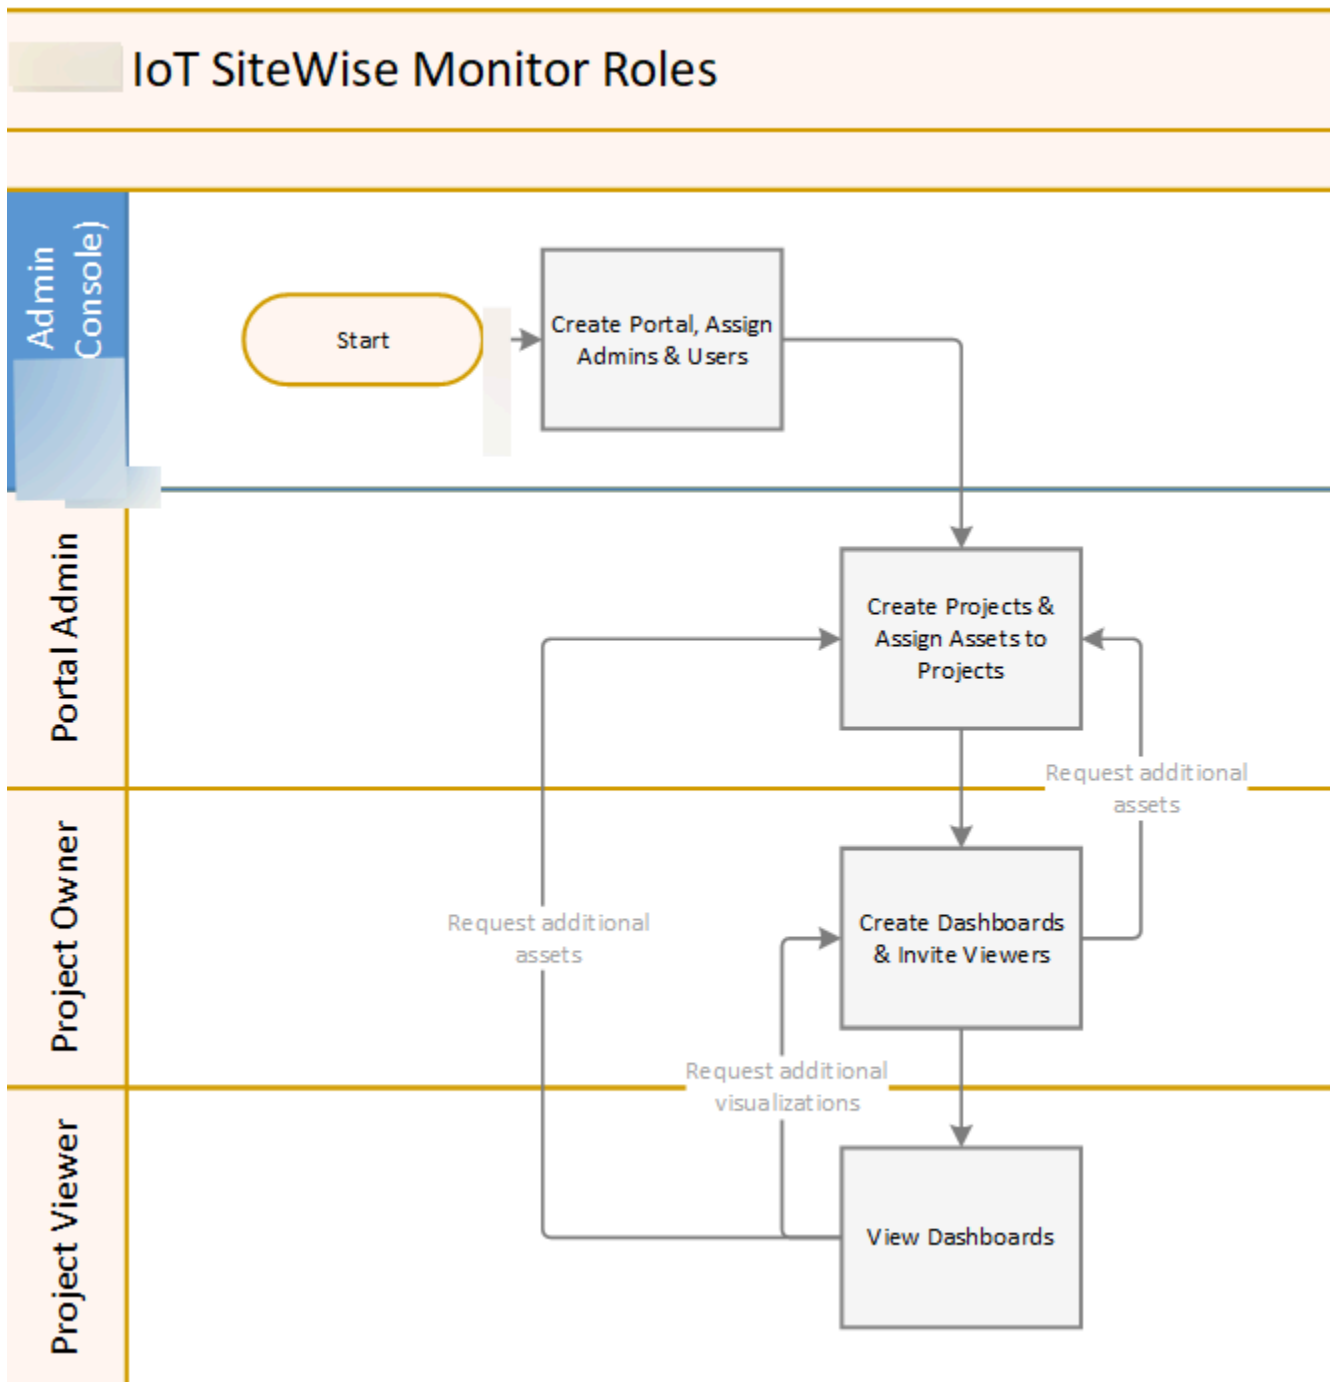

You can manage who has access to your data by using IAM. Your data users can sign in to SiteWise Monitor from a desktop or mobile browser using their IAM credentials.

Users other than the Amazon administrator can access portals when they receive a link to the portal.

SiteWise Monitor concepts

If you received an invitation to sign in to an Amazon IoT SiteWise Monitor portal, then you already have access to data from Amazon IoT SiteWise. To get the most benefit from the Amazon IoT SiteWise Monitor portal, you should be familiar with the following concepts:

Portal

An Amazon IoT SiteWise Monitor portal is a web application that you can use to visualize and share your Amazon IoT SiteWise data. A portal has one or more administrators and contains zero or more projects.

Project

Each SiteWise Monitor portal contains a set of projects. Each project has a subset of your Amazon IoT SiteWise assets associated with it. Project owners create one or more dashboards to provide a consistent way to view the data associated with those assets. Project owners can invite viewers to the project to allow them to view the assets and dashboards in the project. The project is the basic unit of sharing within SiteWise Monitor. Project owners can invite users who were given access to the portal by the Amazon administrator. A user must have access to a portal before a project in that portal can be shared with that user.

Asset

When data is ingested into Amazon IoT SiteWise from your industrial equipment, your devices, equipment, and processes are each represented as assets. Each asset has properties and alarms associated with it. The portal administrator assigns sets of assets to each project.

Property

Properties are time series data associated with assets. For example, a piece of equipment might have a serial number, a location, a make and model, and an install date. It might also have time series values for availability, performance, quality, temperature, pressure, and so on.

Alarm

Alarms monitor properties to identify when equipment is outside of its operating range. Each alarm defines a threshold and a property to monitor. When the property exceeds the threshold, the alarm becomes active and indicates that you or someone on your team should address the issue. Project owners can customize the thresholds and notification settings for alarms. Project viewers can acknowledge and snooze alarms, and they can leave a message with details about the alarm or the action that they took to address it.

Dashboard

Each project contains a set of dashboards. Dashboards provide a set of visualizations for the values of a set of assets. Project owners create the dashboards and the visualizations that it contains. When a project owner is ready to share the set of dashboards, the owner can invite viewers to the project, which gives them access to all dashboards in the project. If you want a different set of viewers for different dashboards, you must divide the dashboards between projects. When viewers look at dashboards, they can customize time range to look at specific data.

Visualization

In each dashboard, project owners decide how to display the properties and alarms of the assets associated with the project. Availability might be represented as a line chart, while other values might be displayed as bar charts or key performance indicators (KPIs). Alarms are best displayed as status grids and status timelines. Project owners customize each visualization to provide the best understanding of the data for that asset.

Getting started with Amazon IoT SiteWise Monitor

You use Amazon IoT SiteWise Monitor portals to view, analyze, and share access to your operational data. Each Amazon IoT SiteWise Monitor portal is a managed web application that is created from the Amazon IoT SiteWise console. When you are given access to a portal, you receive an email that contains a link to the portal. The topics in this section help you understand what you can do in the portal.

Depending on your role, you might have different tasks to perform.

Roles and tasks for Amazon IoT SiteWise Monitor

Role	Tasks	Getting started
Portal administrator	<ul style="list-style-type: none"> • Accept invitation to the portal and log in • Explore assets and their data • Create projects to share data • Assign owners to projects • Add assets to projects 	Getting started as an Amazon IoT SiteWise Monitor portal administrator
Project owner	<ul style="list-style-type: none"> • Accept invitation to the project and log in • Explore project assets and their data • Create dashboards to visualize data • Configure visualizations to understand data • Invite viewers to the project 	Getting started as an Amazon IoT SiteWise Monitor project owner
Project viewer	<ul style="list-style-type: none"> • Accept invitation to the project and log in • Explore shared dashboards 	Getting started as an Amazon IoT SiteWise Monitor project viewer

Role	Tasks	Getting started
	<ul style="list-style-type: none">• View and understand organizational data	

If you don't have an Amazon IoT SiteWise Monitor portal, contact your Amazon administrator. For information about how to create a portal, see [Getting started with Amazon IoT SiteWise Monitor](#) in the *Amazon IoT SiteWise User Guide*.

Signing in to an Amazon IoT SiteWise Monitor portal

Whether you're a portal administrator, a project owner, or a viewer, your first step is to sign in to the Amazon IoT SiteWise Monitor application with your Amazon Identity and Access Management (IAM) credentials. SiteWise Monitor validates your credentials with IAM to ensure that only authorized users can access your company assets.

You can choose one of the following to sign in to the Amazon IoT SiteWise Monitor portal:

- Use your IAM identity.
 - **If you use an IAM user, do the following:**
 1. Open the link to the portal and open the web portal. You might have received an email that contains the link.
 2. In the dialog box, enter your **IAM user name**.
 3. For **Password**, enter your IAM password.
 4. Choose **Sign in**.


IAM validates your credentials and, if valid, opens the portal so that you can perform the tasks allowed for your role.

- **If you want to assume an IAM role, do the following:**
 1. Sign in to the IAM with federation.
 2. Assume an IAM role.
 3. Open the the link to the portal and open the web portal. You might have received an email that contains the link.

If the IAM role was added to the portal, you automatically sign in to the portal. You can now perform the tasks allowed for your role.

Navigation in the Amazon IoT SiteWise Monitor portal

You use the left navigation bar to navigate within the Amazon IoT SiteWise Monitor portal.

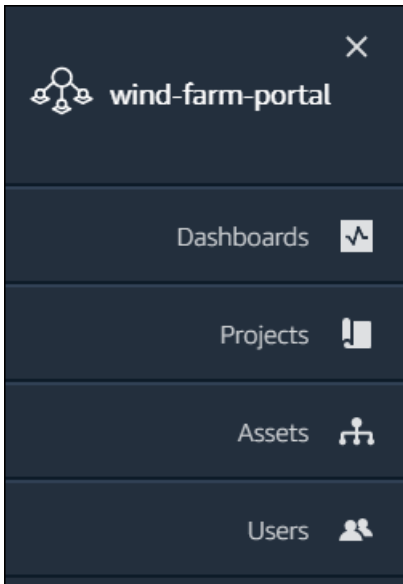

When the bar is collapsed, only the icons are shown.

Note

Only portal administrators see all four icons.

Getting started as an Amazon IoT SiteWise Monitor portal administrator

As the portal administrator, you create projects and associate assets with those projects. You specify an owner for each project. The project owner can then create dashboards with visualizations of the property values and alarms. Only portal administrators can create projects, assign owners, and change the list of assets associated with each project. As the portal administrator, you can do the following tasks:

- [Signing in to a portal](#)

- [Exploring asset data and adding assets to projects](#)
- [Assigning owners to the project](#)
- [Getting started as a project owner](#)

Exploring asset data and adding assets to projects

You can explore the list of assets to which you have access to view their properties and alarms. As the portal administrator, you can add assets to a project to make them available to the project owner. The project owner can then create dashboards to give other subject matter experts a common view of the asset properties and alarms.

The following procedure assumes that you signed in the Amazon IoT SiteWise Monitor portal.

To explore asset data and add asset to projects

1. In the navigation bar, choose the **Assets** icon.



The **Assets** page appears.

The screenshot shows the 'Assets' page interface. At the top, there is a header with the title 'Assets' and a navigation bar. The navigation bar includes a button labeled 'Add asset to project' (marked with a red 'B'), a refresh button (marked with a red 'C'), a time filter set to 'Last 10 minutes', a status dropdown set to 'LIVE', and a date range from 'Jul 23, 2020 4:44:32 PM' to 'Jul 23, 2020 4:54:32 PM' with a 'PDT' dropdown. Below the navigation bar, the main content area is divided into two columns. The left column, marked with a red 'A', contains a sidebar with the title 'Assets' and a description: 'Your devices, equipment, and processes are each represented as assets. [Learn more](#)'. Below this is a dropdown menu set to 'All portal assets'. A list of assets is shown, with 'Demo Wind Farm Asset' selected and highlighted in blue. Below it are 'Demo Turbine Asset 1', 'Demo Turbine Asset 2', 'Demo Turbine Asset 3', and 'Demo Turbine Asset 4'. The right column, marked with a red 'D', displays details for the selected 'Demo Wind Farm Asset'. It has a title 'Demo Wind Farm Asset' and a section 'Attributes' with the description 'Attributes are asset properties that typically don't change.' Below this is a table with three columns: 'Code' (300), 'Location' (Renton), and 'Reliability Manager' (Mary Major). At the bottom of the right column is a section titled 'Total Average Power' showing a line graph with a value of 19871 (Watts). The y-axis of the graph ranges from 19,000 to 20,000.

See the following areas of the page.

Callout	Description
A	Browse the asset hierarchy to find the assets to view or add to a project.
B	Add assets to a project so you and your project owners can create dashboards and visualizations that provide a common way of looking at your organizational data.
C	Select the time range for the data shown for the properties of the selected asset.
D	View the values for the properties of the selected asset. View, configure, and respond to the alarms for the selected asset.

- Choose an asset in the **Assets** hierarchy, and then choose **Add asset to project**.

The screenshot displays the 'Assets' page in the Amazon IoT SiteWise Monitor. At the top, there is a navigation bar with a button labeled 'Add asset to project' circled in red. To the right of this button are controls for time range ('Last 10 minutes'), status ('LIVE'), and time zone ('PDT'). Below the navigation bar, the main content area is divided into two sections. On the left, the 'Assets' hierarchy is shown, with 'Demo Wind Farm Asset' selected and circled in red. On the right, the 'Demo Wind Farm Asset' details are displayed, including a table of attributes:

Attributes		
Attributes are asset properties that typically don't change.		
Code	Location	Reliability Manager
300	Renton	Mary Major

Note

You can add only a single node hierarchy (an asset and all assets that are subordinate to that asset) to a project. To create a dashboard to compare two assets that are children of a common parent asset, add that common parent to the project.

- In the **Add assets to project** dialog box, choose **Create new project**, then choose **Next**.

Add asset to project ✕

Selected node and all of its descendant assets will be added to the project.

Select project or create new project

Create new project

Select existing project

- ▼ Demo Wind Farm Asset
 - Demo Turbine Asset 3
 - Demo Turbine Asset 2
 - Demo Turbine Asset 4
 - Demo Turbine Asset 1

Cancel **Next**

- In **Project name**, enter a name for your project. If you plan to create multiple projects, each with a distinct set of assets, choose a descriptive name.

Create new project ✕

Project name

Wind Farm 3

The project name can have up to 256 characters.

Project description

Contains asset data for Wind Farm #3.

The project description can have up to 2048 characters.

Cancel Previous **Add asset to project**

- In **Project description**, enter a description of the project and its contents.

You can add project owners after you create the project.

- Choose **Add asset to project**.

The **Create new project** dialog box closes, and the new project's page opens.

- When you're ready to share your project, you can add owners to your project to create dashboards and invite viewers. You can see and change who you invited to the project on the project details page.

Assigning owners to the project


As a portal administrator, after you create a project, you can assign project owners. Project owners create dashboards to provide a consistent way to view your asset data. You can send an invitation email to assigned project owners when you are ready for them to work with the project.

To assign owners to a project

- In the navigation bar, choose the **Projects** icon.




- On the **Projects** page, choose the project to which to assign project owners.

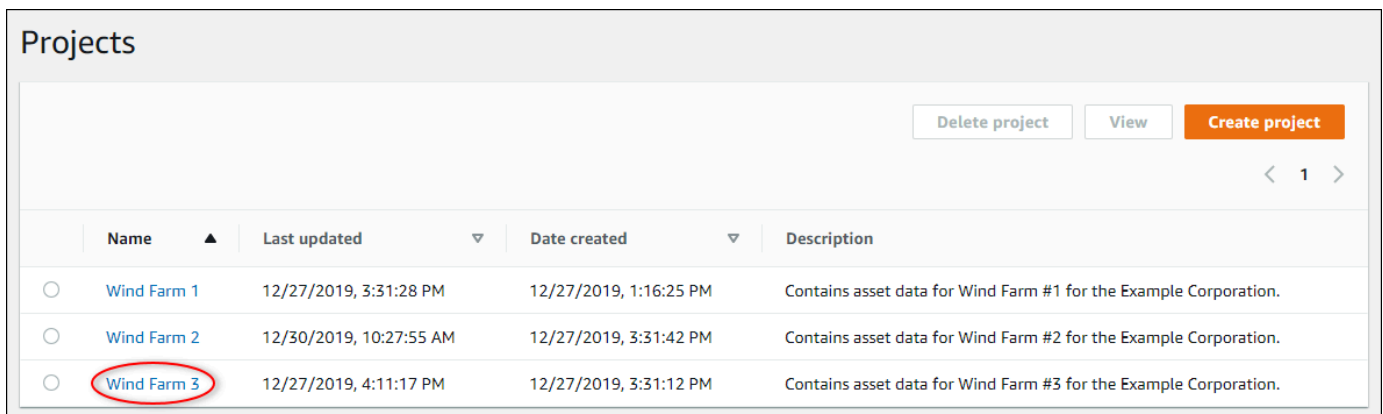A screenshot of the 'Projects' page in the application. At the top right, there are three buttons: 'Delete project', 'View', and 'Create project'. Below these is a table with columns: 'Name', 'Last updated', 'Date created', and 'Description'. The table contains three rows for 'Wind Farm 1', 'Wind Farm 2', and 'Wind Farm 3'. The 'Wind Farm 3' row is circled in red. The 'Name' column has a small upward-pointing triangle next to it. The 'Last updated' and 'Date created' columns have small downward-pointing triangles next to them. The 'Description' column contains text about asset data for each wind farm.

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

- In the **Project owners** section of the project details page, choose **Add owners** if the project has no owners, or **Edit owners**.

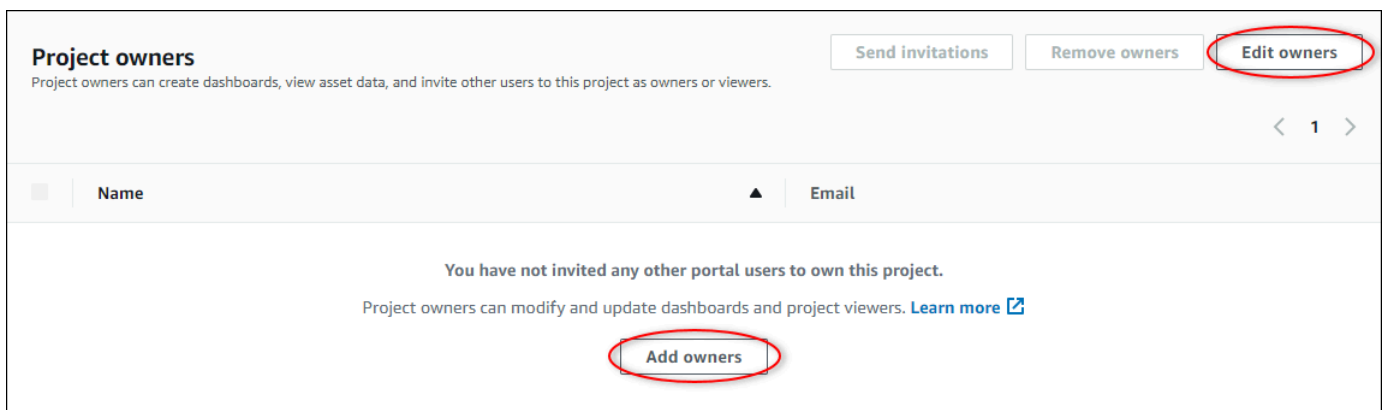A screenshot of the 'Project owners' section of a project details page. At the top right, there are three buttons: 'Send invitations', 'Remove owners', and 'Edit owners'. The 'Edit owners' button is circled in red. Below these buttons is a table with columns: 'Name' and 'Email'. The table is currently empty. Below the table, there is a message: 'You have not invited any other portal users to own this project.' followed by a link 'Project owners can modify and update dashboards and project viewers. Learn more'. At the bottom center, there is a button 'Add owners' which is circled in red.

Project owners

Project owners can create dashboards, view asset data, and invite other users to this project as owners or viewers.

Send invitations Remove owners Edit owners

Name ▲	Email
--------	-------

You have not invited any other portal users to own this project.

Project owners can modify and update dashboards and project viewers. [Learn more](#)

Add owners

4. In the **Project owners** dialog box, select the check boxes for the users to be owners for this project.

Project owners ×

Select the portal users you want to be project owners. [Learn more](#)

Portal users		
<input type="checkbox"/>	Name	Email
<input type="checkbox"/>	Mateo Jackson	mateo.jackson@example.com
<input checked="" type="checkbox"/>	Liu Jie	liu.jie@example.com
<input type="checkbox"/>	Martha Rivera	martha.rivera@example.com

Project owners (0)

No results
We could not find any available users

Cancel **Save**

Note

You can only add project owners if they're portal users. If you don't see a user listed, contact your Amazon administrator to add them to the list of portal users.

5. Choose the >> icon to add those users as project owners.
6. Choose **Save** to save your changes.

Next, you can send emails to your project owners so they can sign in and start managing the project.

To send email invitations to project owners

1. In the navigation bar, choose the **Projects** icon.



- On the **Projects** page, choose the project for which to invite project owners.

Projects

Delete project View **Create project**

< 1 >

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input checked="" type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

- In the **Project owners** section of the project details page, select the check boxes for the project owners to receive an email, and then choose **Send invitations**.

Project owners

Project owners can create dashboards, view asset data, and invite other users to this project as owners or viewers.

Send invitations Remove owners Edit owners

< 1 >

<input checked="" type="checkbox"/>	Name ▲	Email
<input checked="" type="checkbox"/>	Liu Jie	liu.jie@example.com

- Your preferred email client opens, prepopulated with the recipients and the email body with details from your project. You can customize the email before you send it to the project owners.

Getting started as an Amazon IoT SiteWise Monitor project owner

Each portal in the Amazon IoT SiteWise Monitor contains one or more projects. A project is the unit of sharing. If you invite viewers to your project, they can see all dashboards that you created in that project, as well as explore the assets that are associated with the project. If you want viewers to have access to different subsets of your dashboards, you must ask your portal administrator to split the project. As the owner of one or more projects, you can do the following tasks:

- [Signing in to a portal](#)
- [Exploring project assets and their data](#)

- [Creating dashboards to visualize data](#)
- [Configuring visualizations to understand data](#)
- [Assigning viewers to the project](#)

Exploring project assets and their data

You can explore the list of assets to which you have access to view their properties. If you need additional assets in your project, you must contact your portal administrator.

Note

As a project owner, you can view only those assets that are contained in projects to which you have access.

The following procedure assumes that you signed in the Amazon IoT SiteWise Monitor portal.

To explore project assets and their data

- In the navigation bar, choose the **Assets** icon.



The **Assets** page appears.

The screenshot displays the 'Assets' section of the Amazon IoT SiteWise Monitor. At the top, there is a header 'Assets' and a navigation bar with a red circle 'B' next to 'Last 10 minutes', a 'LIVE' indicator, and two time range selectors: 'Jul 24, 2020 1:31:48 PM' and 'Jul 24, 2020 1:41:48 PM' with a 'PDT' dropdown. On the left, a sidebar titled 'Assets' (with a red circle 'A') shows a list of assets under 'Wind Farm 3', with 'Demo Wind Farm Asset' selected. The main content area shows 'Demo Wind Farm Asset' (with a red circle 'C') and its 'Attributes' table:

Attributes		
Attributes are asset properties that typically don't change.		
Reliability Manager	Location	Code
Mary Major	Renton	300

Below the attributes is a graph titled 'Total Average Power' showing a value of 19192 (Watts). The graph has a y-axis ranging from 20,000 to 30,000.

See the following areas of the page.

Callout	Description
A	Browse the asset hierarchy to find assets to view.
B	Select the time range for the data shown for the properties of the selected asset.
C	View the values for the properties of the selected asset. View, configure, and respond to the alarms for the selected asset.

Creating dashboards to visualize data

The primary activity for a project owner is to create dashboards that contain one or more visualizations that show the values of asset properties and alarms. Creating a dashboard is quick and easy.

To create dashboards

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project in which you want to create a dashboard.

Projects

View

< 1 >

	Name ▲	Last updated ▼	Date created ▼	Description	Permissions ▼
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.	Owner

3. In the **Dashboards** section, choose **Create dashboard**.

Dashboards

Your team can use dashboards to organize data in custom visualizations. In each dashboard, you can adjust the time period to explore your live and historical data, analyze trends, and identify issues. [Learn more](#)

Delete Open **Create dashboard**

< 1 >

	Name ▲	Last updated ▼	Date created ▼
No dashboards			
Your dashboards provide visualizations for project assets to help your project viewers get insights into your device, process, and equipment data.			
Create dashboard			


Next, you add one or more visualizations of asset properties and alarms to your dashboard.

Configuring visualizations to understand data

Each dashboard can display one or more visualizations of the values of the asset properties and alarms in your project. You can add a visualization for any property or alarm, and customize the details of the visualization.

To configure visualizations

1. In the dashboard editor, change the dashboard name from the default, **New dashboard**, to something that describes the content.

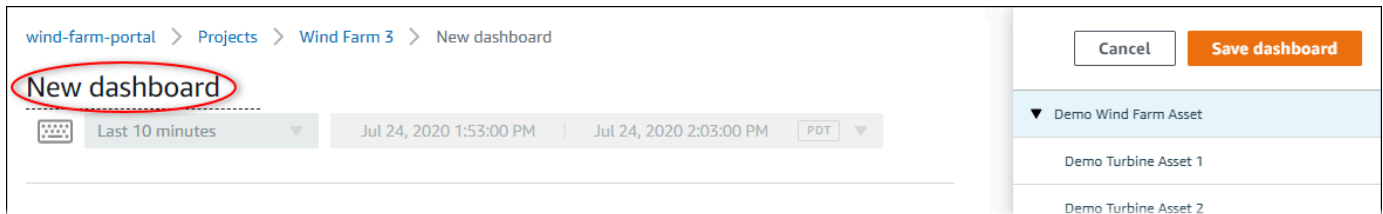

2. Browse the list of project assets on the right side of the dashboard. When you find a property or alarm to visualize, drag it to the dashboard.
 - The default visualization type for properties is the [line chart](#).
 - The default visualization type for alarms is the [status grid widget](#).

Note

You can drag multiple properties and alarms onto a single visualization.

wind-farm-portal > Projects > Wind Farm 3 > New dashboard

New dashboard

Last 10 minutes Jul 24, 2020 1:53:00 PM Jul 24, 2020 2:03:00 PM PDT

Drag data here


▼ Demo Wind Farm Asset

- Demo Turbine Asset 1
- Demo Turbine Asset 2
- Demo Turbine Asset 3
- Demo Turbine Asset 4

Properties for "Demo Wind Farm Asset"

Code	300
Total Average Power	19934 Watts
Total Overdrive State Time	0 seconds


3. To change how your data displays, choose the visualization type.

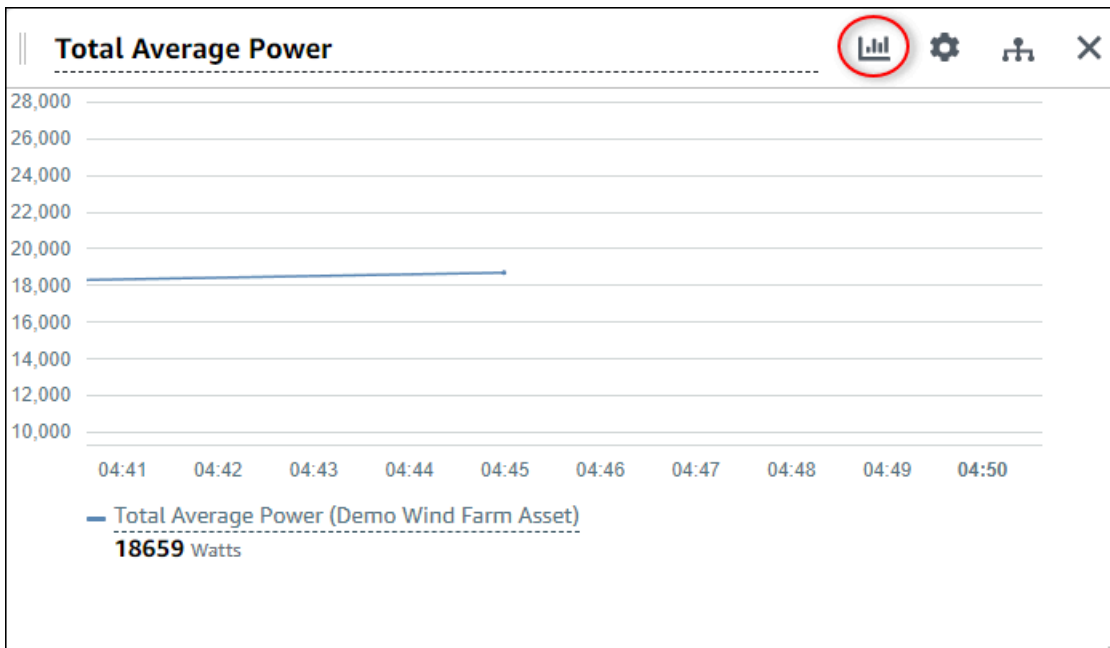


For more information about the available visualization types, see [Choosing visualization types](#).

To customize details of the visualization, see [Customizing visualizations](#).


- To add thresholds to your property, choose the visualization configuration icon. If you add a property that has an alarm, the visualization displays that alarm's threshold. For more information, see [Configuring thresholds](#).

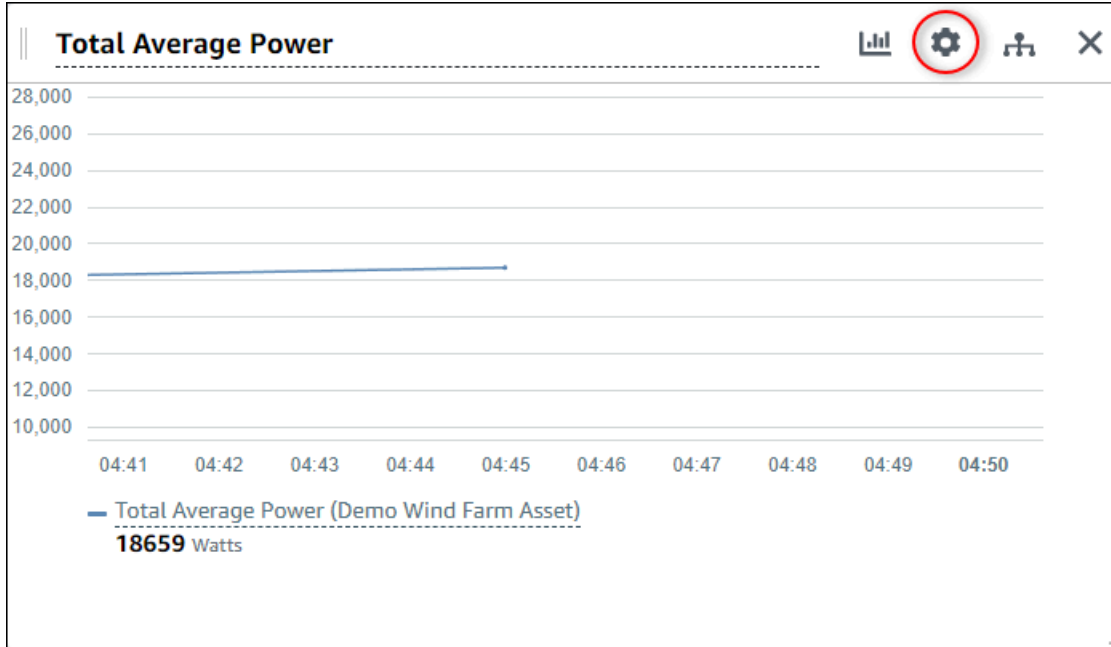

- To move a visualization, choose the control icon in the upper left and then drag the visualization to a new location.

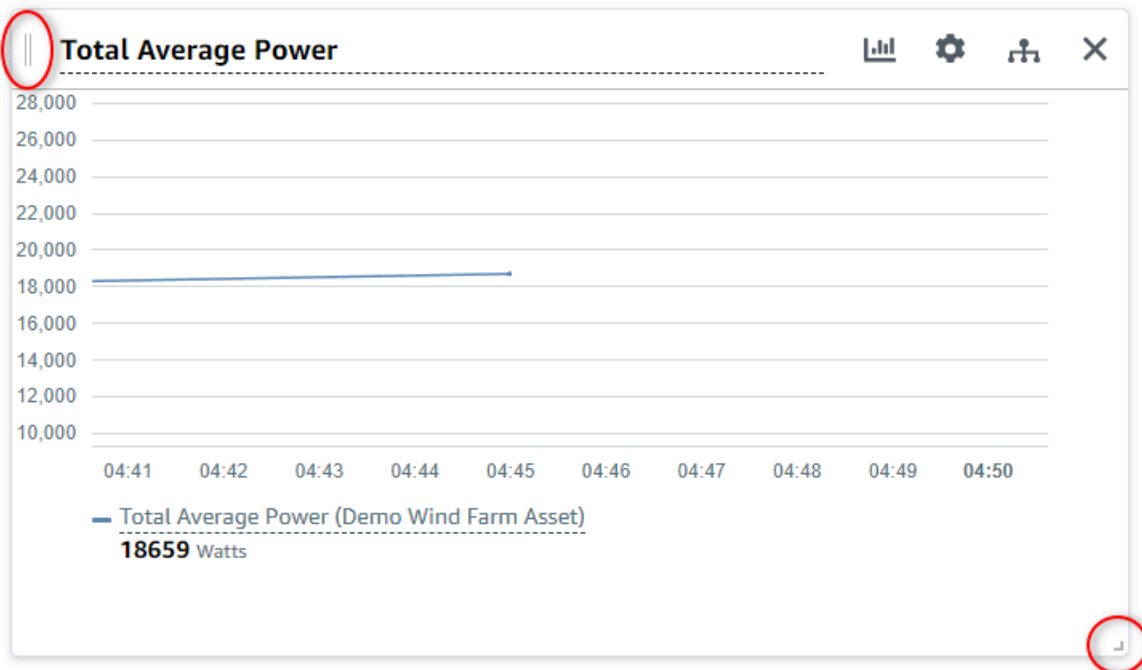

6. To change the size of a visualization, use the resize control in the lower right. Drag the corner to a new size and shape. Visualizations snap to the grid when resized, so you only have coarse control over the size.
7. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.
8. Repeat these steps to add and configure more visualizations to the dashboard.
9. When you finish making changes, choose **Save dashboard** in the upper-right corner.

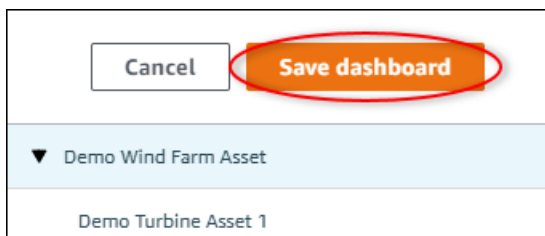

When you're ready to share your dashboard, you can add viewers to your project to explore dashboards. You can see and change who you invited to the project on the project details page.

Assigning viewers to the project

You can assign viewers to your project from the project details page.

To assign viewers to a project

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project to which to assign viewers.

Projects

View

< 1 >

	Name ▲	Last updated ▼	Date created ▼	Description	Permissions ▼
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.	Owner

3. In the **Project viewers** section of the project details page, choose **Add viewers** if the project has no viewers, or **Edit viewers**.

Project viewers

Project viewers can view dashboards and view asset data in this project. Project viewers can't edit dashboards or add other users to this project.

Send invitations Remove viewers **Edit viewers**

< 1 >

<input type="checkbox"/>	Name ▲	Email
<p>You have not invited any other portal users to view this project.</p> <p>Project viewers can interact with all of your project's dashboards, but not edit them. Learn more</p> <p style="text-align: center;">Add viewers</p>		

4. In the **Project viewers** dialog box, select the check boxes for the users to be viewers for this project.

Project viewers

Select the portal users you want to be project viewers. [Learn more](#)

Portal users

	Name	Email
<input type="checkbox"/>	Mateo Jackson	mateo.jackson@example.com
<input checked="" type="checkbox"/>	Martha Rivera	martha.rivera@example.com

Project viewers (0)

No results
We could not find any available users

Cancel **Save**

Note

You can only add viewers if they're portal users. If you don't see a user listed, contact your Amazon administrator to add them to the list of portal users.

5. Choose the >> icon to add those users as project viewers.
6. Choose **Save** to save your changes.

Next, you can send emails to your project viewers so they can sign in and start exploring the dashboards in the project.

To send email invitations to project viewers

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project to which to invite project viewers.

	Name ▲	Last updated ▼	Date created ▼	Description	Permissions ▼
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.	Owner

3. In the **Project viewers** section of the project details page, select the check boxes for the project viewers to receive an email, and then choose **Send invitations**.

<input checked="" type="checkbox"/>	Name	Email
<input checked="" type="checkbox"/>	Martha Rivera	martha.rivera@example.com

4. Your preferred email client opens, prepopulated with the recipients and the email body with details from your project. You can customize the email before you send it to the project viewers.

Getting started as an Amazon IoT SiteWise Monitor project viewer

When you're invited to a project as a viewer, someone in your organization has set up a project and a set of dashboards to provide you with a consistent way to view data for your company's devices, equipment, and processes. In Amazon IoT SiteWise, those devices, equipment, and processes are referred to as assets. You can use Amazon IoT SiteWise Monitor to view the properties and alarms for a set of assets. Because the project owner has set up dashboards to visualize those properties, everyone who views the project has the dashboard view to draw insights from the data. As a project viewer, you can view all of the dashboards in the project. You can adjust the time range for the data shown in the dashboard. And you can explore the properties and alarms of individual assets to see a property or alarm that isn't on the dashboard.

You can only view the assets that are associated with the project to which you've been invited. To request additional assets, contact your project owner. The project owner can also update the dashboards to change the visualizations or show additional properties and alarms.

As a project viewer, you can do the following tasks:

- [Signing in to a portal](#)
- [Exploring shared dashboards](#)
- [Exploring project assets and their data](#)

Exploring shared dashboards

As a viewer for one or more Amazon IoT SiteWise Monitor projects, you can view the dashboards to understand the data for your devices, equipment, and processes. You can adjust the time range for the visualizations in each dashboard to gain insights into your data.

The following procedure assumes that you are signed in the Amazon IoT SiteWise Monitor portal.

To explore shared dashboards

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project whose dashboards you want to view.

Projects					
					View
< 1 >					
	Name ▲	Last updated ▼	Date created ▼	Description	Permissions ▼
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.	Owner


3. In the **Dashboards** section of the project details page, choose the name of the dashboard to view. You can also select the check box next to the dashboard, and then choose **Open**.

Dashboards [Info](#) Open

Find dashboards

<input type="checkbox"/>	Name	Last updated	Date created
<input type="checkbox"/>	Turbine 1	12/27/2019, 1:54:05 PM	12/27/2019, 1:52:33 PM
<input type="checkbox"/>	Turbine 2	12/27/2019, 1:55:09 PM	12/27/2019, 1:54:18 PM
<input type="checkbox"/>	Turbine 3	12/27/2019, 1:55:57 PM	12/27/2019, 1:55:12 PM
<input type="checkbox"/>	Turbine 4	12/27/2019, 1:56:47 PM	12/27/2019, 1:56:03 PM
<input type="checkbox"/>	Wind Farm Dashboard	12/27/2019, 1:52:01 PM	12/27/2019, 1:18:22 PM

4. You can browse the visualizations in the dashboard.

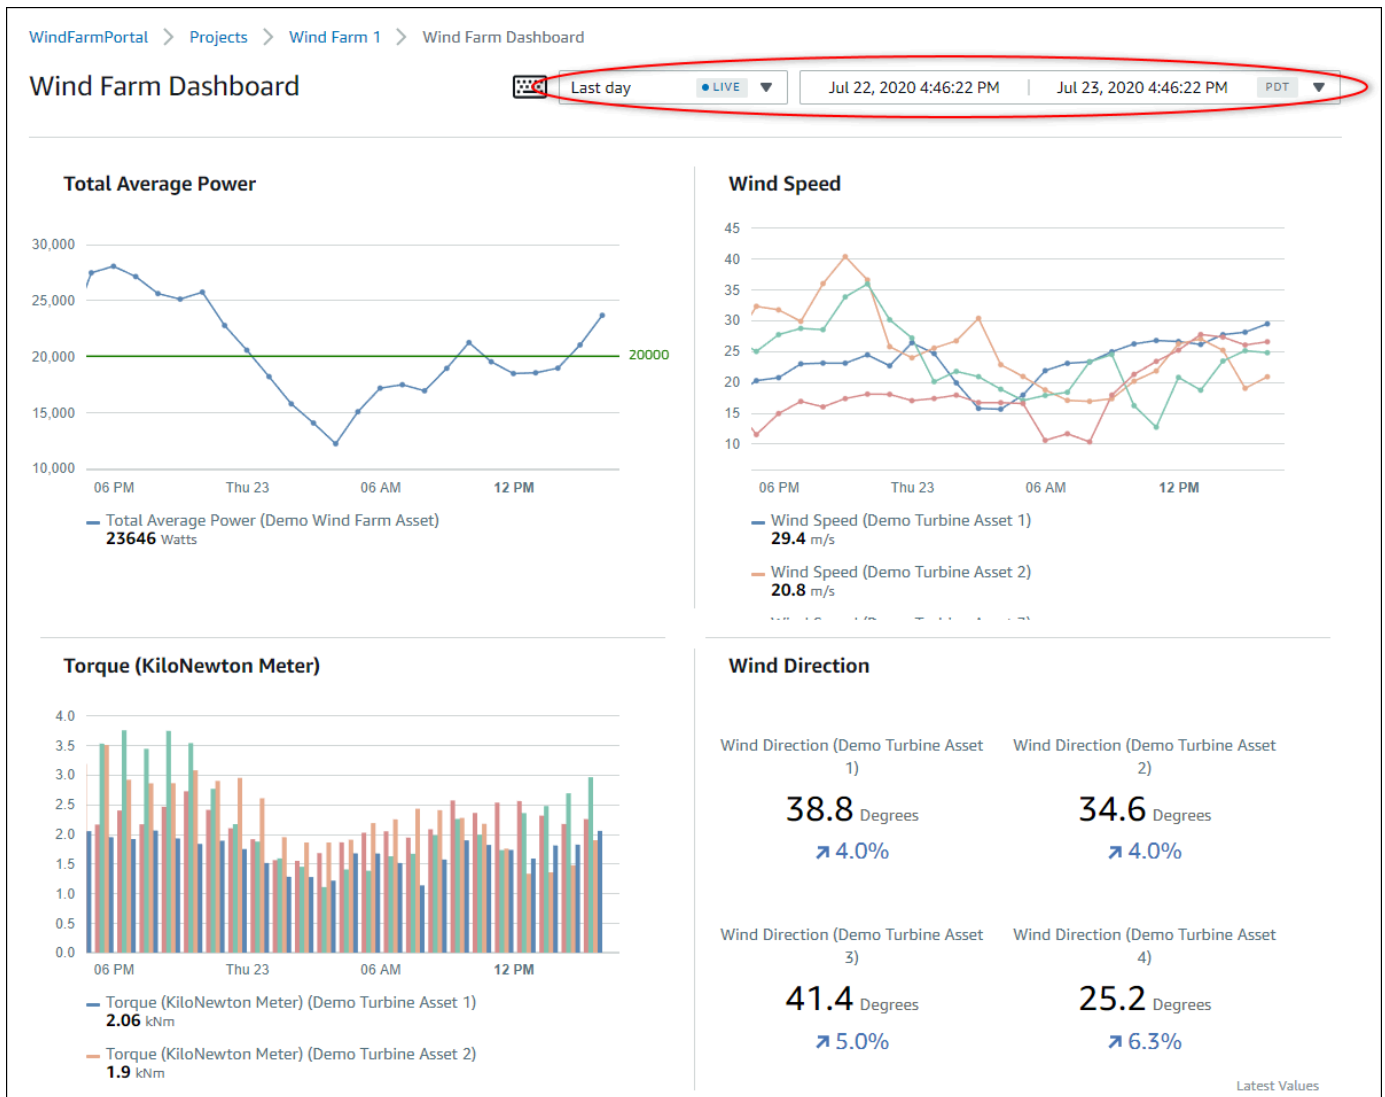

Do any of the following actions to adjust the displayed time range for your data:

- Click and drag a time range on one of the line or bar charts to zoom in to the selected time range.
- Double-click on a time range to zoom in on the selected point.
- Press **Shift** and then double-click on a time range to zoom out from the selected point.
- Press **Shift** and then drag the mouse on a time range to shift the range left or right.
- Use the drop-down list to choose a predefined time range to view.
- Use the time range control to open the calendar and specify a start and end time for your range.

Each visualization shows the latest reported value for the selected time range.

5. If you're a project owner or portal administrator, you can modify the dashboard. For more information see [Adding visualizations](#).

Exploring project assets and their data

While you will typically use the dashboards that the project owner prepared for you, you can also view properties and alarms for the assets included in a project. For example, you might check the model, install date, or location for a piece of equipment.

Note

As a project viewer, you can view only those assets that are contained in projects to which you have access.

The following procedure assumes that you signed in the Amazon IoT SiteWise Monitor portal.

To explore project assets and their data

- In the navigation bar, choose the **Assets** icon.



The **Assets** page appears.

The screenshot displays the 'Assets' page in the Amazon IoT SiteWise Monitor. At the top, there is a header with a red callout 'B' and a time range selector set to 'Last 10 minutes' with a 'LIVE' status. The main content area is divided into two sections. On the left, a sidebar titled 'Assets' (with a red callout 'A') shows a hierarchy starting with 'Wind Farm 3' and expanded to show 'Demo Wind Farm Asset', which includes four turbine assets. The main content area is titled 'Demo Wind Farm Asset' (with a red callout 'C') and contains an 'Attributes' section with a table of properties: Reliability Manager (Mary Major), Location (Renton), and Code (300). Below this is a 'Total Average Power' section showing a value of 19192 Watts, accompanied by a line graph with a y-axis ranging from 20,000 to 30,000.

See the following areas of the page.

Callout	Description
A	Browse the asset hierarchy to find assets to view.
B	Select the time range for the data shown for the properties of the selected assets.
C	View the values for the properties of the selected asset. View and respond to the alarms for the selected asset.

Exploring assets

In Amazon IoT SiteWise, an asset represents a device, a process, or a piece of equipment. You can use Amazon IoT SiteWise Monitor to explore and visualize the properties and alarms for your assets. Each project in Amazon IoT SiteWise Monitor is associated with a set of assets by the portal administrator. If you're a portal administrator, you can see all of the assets in the portal. If you're a project owner or a project viewer, you can see only the assets that are associated with the projects for which you are an owner or a viewer.

Assets can have different properties. Some properties don't change over time, such as the asset's location, model, serial number, and so on. Other properties have a series of values that are produced over time. Properties can update at different rates. You might have a temperature sensor that updates every second, and a product quality metric that updates every hour.

Assets can also have alarms. Alarms detect when properties are outside their operating ranges, so that you and your team can address issues with your equipment and processes. For example, you might have an alarm that detects when the temperature in a boiler exceeds its maximum temperature.

You can perform the following asset-related tasks.

Task	Roles that can perform the task
Viewing asset data	Portal administrators can see all assets for the portal. Project owners and viewers can see only those assets that are associated with the projects to which they are invited.
Adding assets to projects	Only a portal administrator can change the list of assets that are associated with a project.
Adding properties and alarms to dashboards	Project owners add asset properties to dashboards. Portal administrators don't typically edit dashboards. Project viewers can't edit dashboards.

Viewing asset data

On the **Assets** page, you can view all properties and alarms of any asset that is associated with the projects to which you have access. Portal administrators have access to all assets in the portal and can use the **Assets** page to explore individual assets before adding them to projects. Dashboards provide a common visualization for all project viewers.


The following procedures describe how to view asset data on the **Assets** page and how to view asset data from a project page. For information about viewing asset data in dashboards, see [Viewing dashboards](#).

To view asset data on the Assets page

1. Log in to your Amazon IoT SiteWise Monitor portal. For more information, see [Signing in to an Amazon IoT SiteWise Monitor portal](#).
2. In the navigation bar, choose the **Assets** icon.



3. (Optional) Choose a project in the projects drop-down list to show only assets from a specific project.

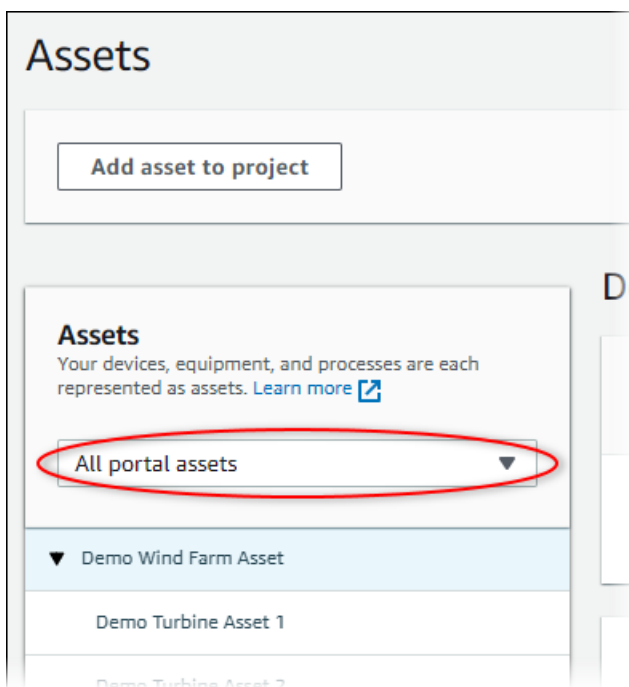

4. Choose an asset in the **Assets** hierarchy.

Some assets might have a few static properties, called attributes. For example, a factory's properties, such as location, have only a single value and typically don't change over time.

Assets

Add asset to project

Last 10 minutes **LIVE** Jul 27, 2020 12:34:20 PM | Jul 27, 2020 12:44:20 PM PDT

Assets
Your devices, equipment, and processes are each represented as assets. [Learn more](#)

All portal assets

- ▼ Demo Wind Farm Asset
- Demo Turbine Asset 1
- Demo Turbine Asset 2

Demo Wind Farm Asset

Attributes
Attributes are asset properties that typically don't change.

Reliability Manager	Location	Code
Mary Major	Renton	300

Total Average Power 30469 (Watts)

- Choose the arrow next to an asset to view all children of that asset, then choose an equipment asset. Amazon IoT SiteWise Monitor shows attributes, such as installation date, and time series data, such as availability or overall equipment effectiveness (OEE).

Assets

Add asset to project

Last 10 minutes **LIVE** Jul 27, 2020 12:40:00 PM | Jul 27, 2020 12:50:00 PM PDT

Assets
Your devices, equipment, and processes are each represented as assets. [Learn more](#)

All portal assets

- ▼ Demo Wind Farm Asset
- ▼ Demo Turbine Asset 1
- Demo Turbine Asset 2
- Demo Turbine Asset 3
- Demo Turbine Asset 4
- Solar Array 1

Demo Turbine Asset 1

Attributes
Attributes are asset properties that typically don't change.

Make	Model	Location
Amazon	500	Renton

Average Power 8535 (Watts)

14,000
12,000
10,000
8,000
6,000

12:41 12:42 12:43 12:44 12:45 12:46 12:47 12:48 12:49 12:50

6. Do any of the following actions to adjust the displayed time range for your data:
 - Click and drag a time range on one of the line or bar charts to zoom in to the selected time range.
 - Double-click on a time range to zoom in on the selected point.
 - Press **Shift** and then double-click on a time range to zoom out from the selected point.
 - Press **Shift** and then drag the mouse on a time range to shift the range left or right.
 - Use the drop-down list to choose a predefined time range to view.
 - Use the time range control to open the calendar and specify a start and end time for your range.
7. Choose the **Alarms** tab to view the alarms for an asset.
8. Choose an alarm to view the alarm details and its state data as a time series.

Adding assets to projects

As a portal administrator, you decide how to assign your Amazon IoT SiteWise assets to projects. You give access to users at the project level, so you should group related assets into projects that will have a common set of viewers.

Note

You can only add assets to a project if you're a portal administrator. Project owners and viewers can explore the assets in the projects to which they have access, but can't add assets to the project.


You can add assets to an existing project or you can create a project for the chosen assets.

Adding assets to a new project


1. In the navigation bar, choose the **Assets** icon.



2. (Optional) Choose a project in the projects drop-down list to show only assets from a specific project.

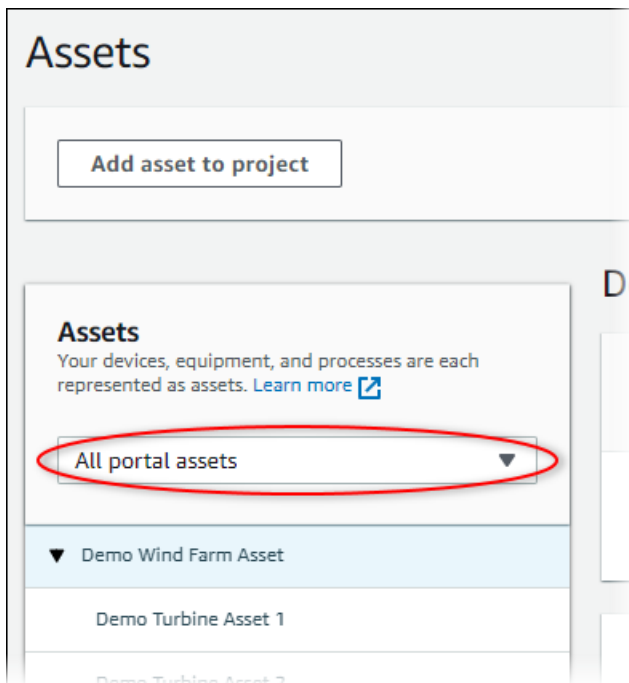

3. Choose an asset in the **Assets** hierarchy, and then choose **Add asset to project**.

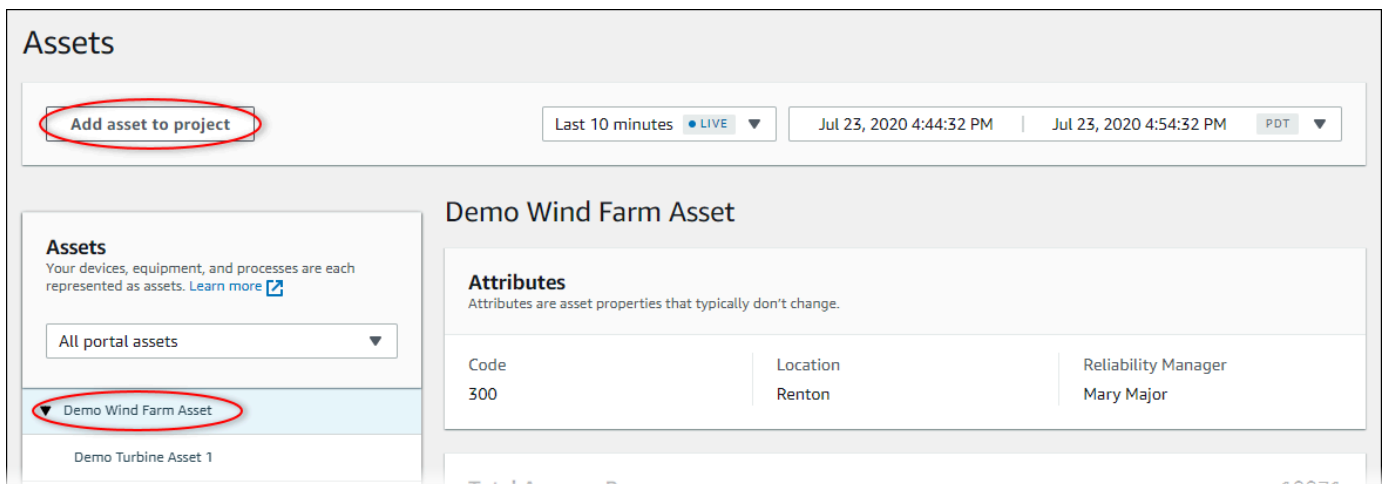

Note

You can add only a single node hierarchy (an asset and all assets that are subordinate to that asset) to a project. To create a dashboard to compare two assets that are children of a common parent asset, add that common parent to the project.

4. In the **Add assets to project** dialog box, choose **Create new project**, then choose **Next**.

Add asset to project ✕

Selected node and all of its descendant assets will be added to the project.

Select project or create new project

Create new project

Select existing project

- ▼ Demo Wind Farm Asset
 - Demo Turbine Asset 3
 - Demo Turbine Asset 2
 - Demo Turbine Asset 4
 - Demo Turbine Asset 1

Cancel **Next**

- In **Project name**, enter a name for your project. If you plan to create multiple projects, each with a distinct set of assets, choose a descriptive name.

Create new project ✕

Project name

Wind Farm 3

The project name can have up to 256 characters.

Project description

Contains asset data for Wind Farm #3.

The project description can have up to 2048 characters.

Cancel Previous **Add asset to project**

- In **Project description**, enter a description of the project and its contents.

You can add project owners after you create the project.

- Choose **Add asset to project**.


The **Create new project** dialog box closes, and the new project's page opens.

Adding assets to an existing project


1. In the navigation bar, choose the **Assets** icon.



2. (Optional) Choose a project in the projects drop-down list to show only assets from a specific project.

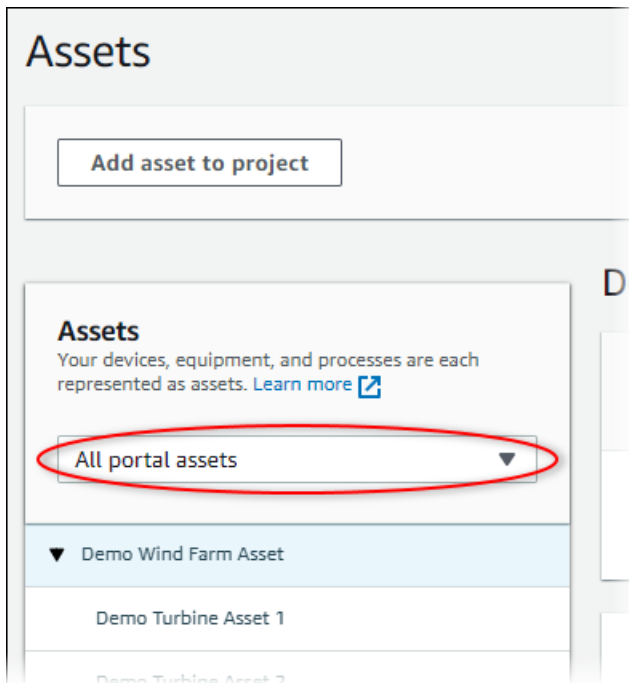

3. Choose an asset in the **Assets** hierarchy, and then choose **Add asset to project**.

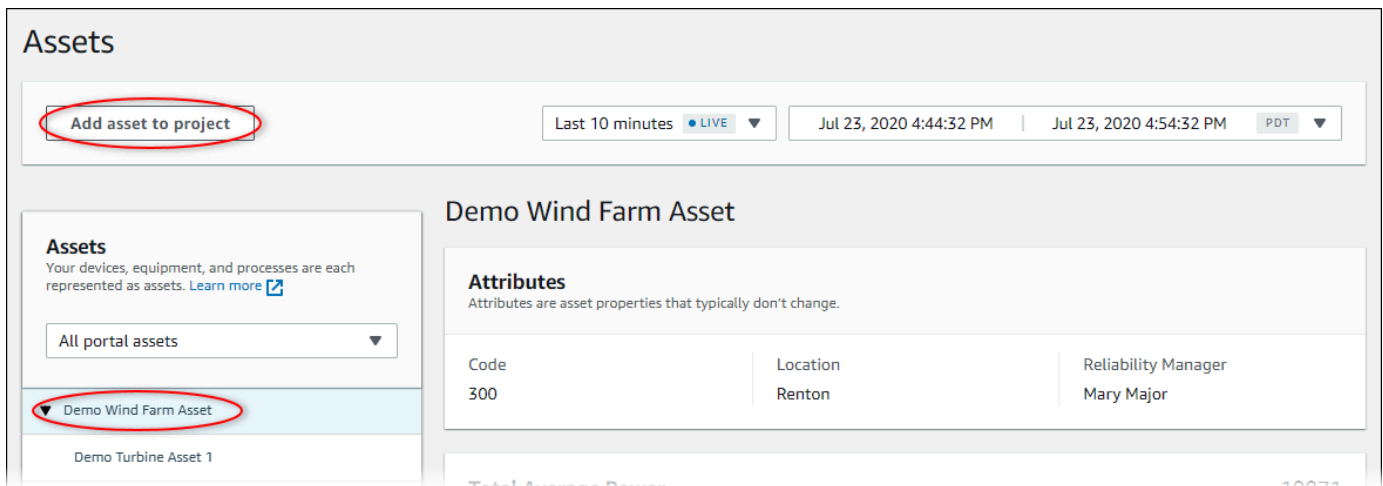

Note

You can add only a single node hierarchy (an asset and all assets that are subordinate to that asset) to a project. To create a dashboard to compare two assets that are children of a common parent asset, add that common parent to the project.

4. In the **Add assets to project** dialog box, choose **Select existing project**, and then choose the project to add the assets.

Add asset to project [X]

Selected node and all of its descendant assets will be added to the project.

Select project or create new project

Create new project

Select existing project

Select an existing project

Wind Farm 2

Cancel **Add asset to project**

5. Choose **Add asset to project**.

The **Create new project** dialog box closes, and the new project's page opens.

Removing assets from a project

As a portal administrator, you can remove assets from projects if you no longer need them.

To remove assets from a project

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project to remove assets from.

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

3. Choose **Remove all assets from project**.

Project assets

Each project contains a set of assets from which your dashboards can visualize data. Users with access to this project can then explore this data.

Remove all assets from project

▶ Demo Wind Farm Asset

4. In the dialog box, confirm that you want to remove the assets.

Adding properties and alarms to dashboards

As the project owner, you define dashboards to give your viewers a standard way to look at asset properties and alarms. By providing a consistent view, you ensure that everyone sees the data that you want them to see, in the same manner. You group asset properties and alarms on to dashboards in a way that makes sense for your business and viewers.

Note

Project viewers can't modify a dashboard.

You can add asset properties to a new dashboard or an existing dashboard.

To add asset properties

1. In the navigation bar, choose the **Projects** icon.



2. Choose one of the following options:

- To add asset properties and alarms to an existing dashboard, choose the dashboard to update, and then choose **Edit**.
- To add asset properties and alarms to a new dashboard, choose **Create dashboard**.

Dashboards [Info](#) [Delete](#) [Open](#) [Create dashboard](#)

Find dashboards < 1 >

<input type="checkbox"/>	Name ▲	Last updated ▼	Date created ▼
<input type="checkbox"/>	Total Power	12/27/2019, 4:55:17 PM	12/27/2019, 4:33:13 PM

3. Choose the asset whose properties or alarms that you want to add to the dashboard.
4. Choose **Properties** to view the asset's properties or **Alarms** to view the asset's alarms. If an alarm monitors a property, you automatically add that alarm to the dashboard when you add its property.
5. Drag a property or alarm from the asset hierarchy to the dashboard. You can add multiple properties and alarms to one visualization.

wind-farm-portal > Projects > Wind Farm 3 > New dashboard

New dashboard

Last 10 minutes | Jul 24, 2020 1:53:00 PM | Jul 24, 2020 2:03:00 PM | PDT

Drag data here

▼ Demo Wind Farm Asset

- Demo Turbine Asset 1
- Demo Turbine Asset 2
- Demo Turbine Asset 3
- Demo Turbine Asset 4

Properties for "Demo Wind Farm Asset"

Code	300
Total Average Power	19934 Watts
Total Overdrive State Time	0 seconds

Cancel Save dashboard

The asset property appears on the dashboard with a default visualization type:

- The default visualization type for non-string properties is the [line chart](#).
- The default visualization type for string properties is the [KPI widget](#).
- The default visualization type for alarms is the [status grid widget](#).

You can change the visualization type and customize the visualization settings. For more information, see [Customizing visualizations](#).

Sharing data with Amazon IoT SiteWise Monitor projects

In Amazon IoT SiteWise Monitor, you share data by inviting viewers to a project. Viewers can view all assets, asset properties, alarms, and dashboards in the project. You can create multiple projects to give groups of viewers access to different sets of assets and dashboards. Only portal administrators can create and update projects and associate assets with projects. Project owners create and update dashboards and invite viewers to projects.

Your Amazon administrator chooses the portal administrators. Your portal administrators assign assets to projects and assign owners to those projects. The project owner invites viewers to a project. At each step, these users decide who has access to your data and what type of access they have.

You can perform the following data sharing tasks:

Task	Roles that can perform the task
Creating projects	Only portal administrators can create projects.
Viewing project details	Portal administrators can view details for all projects. Project owners and project viewers can view details for projects to which they have been invited.
Adding assets to projects	Only a portal administrator can add assets to a project.
Assigning project owners	Only a portal administrator can assign project owners to a project.
Assigning project viewers	Portal administrators can invite viewers to any project in the portal. Project owners can invite viewers to projects that they administer.
Changing project details	Only portal administrators can update the name and description for a project.
Deleting projects	Only portal administrators can delete projects.

Creating projects

As a portal administrator, you select a set of assets and then create a project for those assets (see [Adding assets to a new project](#)). You can also create an empty project and add assets later.

Creating a new project

Follow this procedure to create a new project.

To create a new project

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose **Create project**

Projects

[Delete project](#) [View](#) [Create project](#)


< 1 >

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

3. In the **Create new project** dialog box, enter a **Project name** and **Project description**. Use a description that informs users about the assets and visualizations in the project.

Note

Make sure that the project name and description don't contain confidential information.

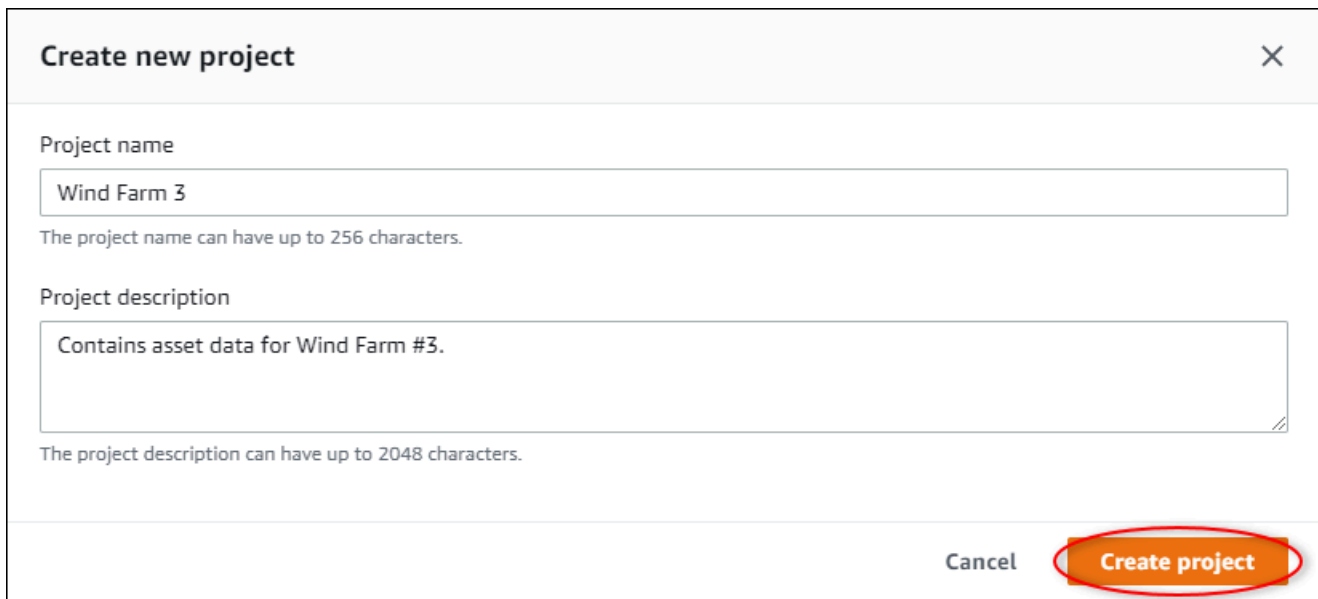

Create new project ✕

Project name
Wind Farm 3
The project name can have up to 256 characters.

Project description
Contains asset data for Wind Farm #3.
The project description can have up to 2048 characters.

Cancel **Create project**

4. Choose **Finish** to create the new project.

Next, you might [assign project owners](#) and [add assets to the project](#). Until you add assets to the project, the project owner can't create dashboards and visualizations.

Viewing project details

You can review the details for any project to which you have access, including:


- **Project details** – This can include the name, description, date created, and last modified date.
- **Dashboards** – The list of dashboards included in the project and their descriptions.
- **Project assets** – The list of devices, processes, and equipment that are associated with the project.
- **Project administrators** – The list of users who can create and update dashboards and visualizations in the project.
- **Project viewers** – The list of users who can view the assets and the dashboards defined in the project.

To view project details

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project whose details you want to view.

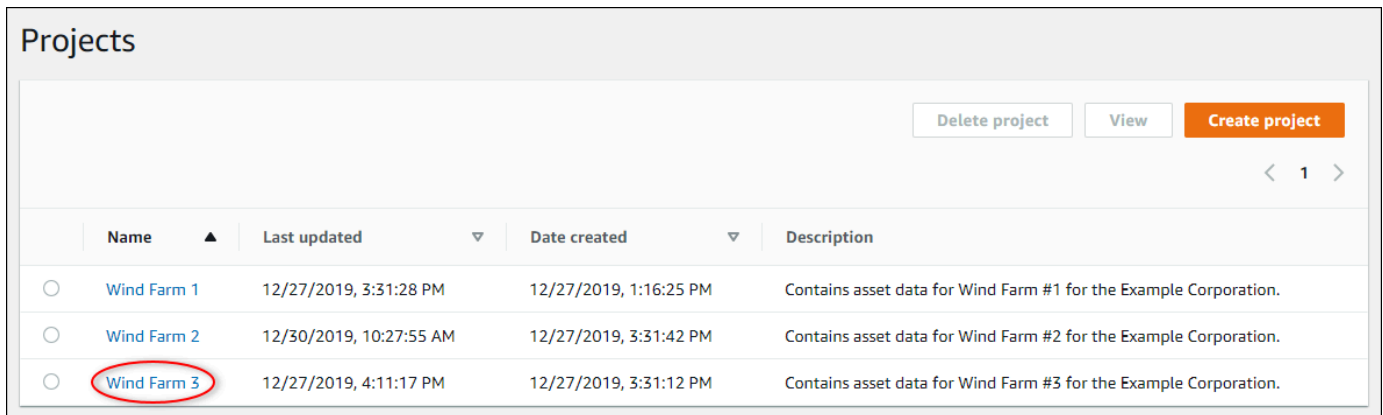A screenshot of the 'Projects' page in the application. At the top right, there are three buttons: 'Delete project', 'View', and 'Create project'. Below the buttons is a table with columns for 'Name', 'Last updated', 'Date created', and 'Description'. The table contains three rows of project data. The third row, 'Wind Farm 3', is circled in red. The table also includes a pagination control showing '< 1 >'.

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

Adding assets to projects

As a portal administrator, you decide how to assign your Amazon IoT SiteWise assets to projects. You give access to users at the project level, so you should group related assets into projects that will have a common set of viewers.

Note

You can only add assets to a project if you're a portal administrator. Project owners and viewers can explore the assets in the projects to which they have access, but can't add assets to the project.


You can add assets to an existing project or you can create a project for the chosen assets.

Adding assets to a new project


1. In the navigation bar, choose the **Assets** icon.



2. (Optional) Choose a project in the projects drop-down list to show only assets from a specific project.

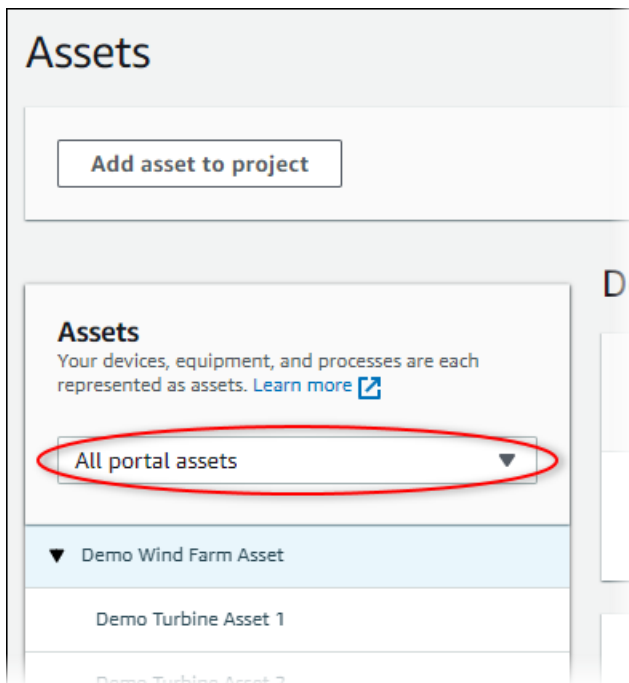

- Choose an asset in the **Assets** hierarchy, and then choose **Add asset to project**.

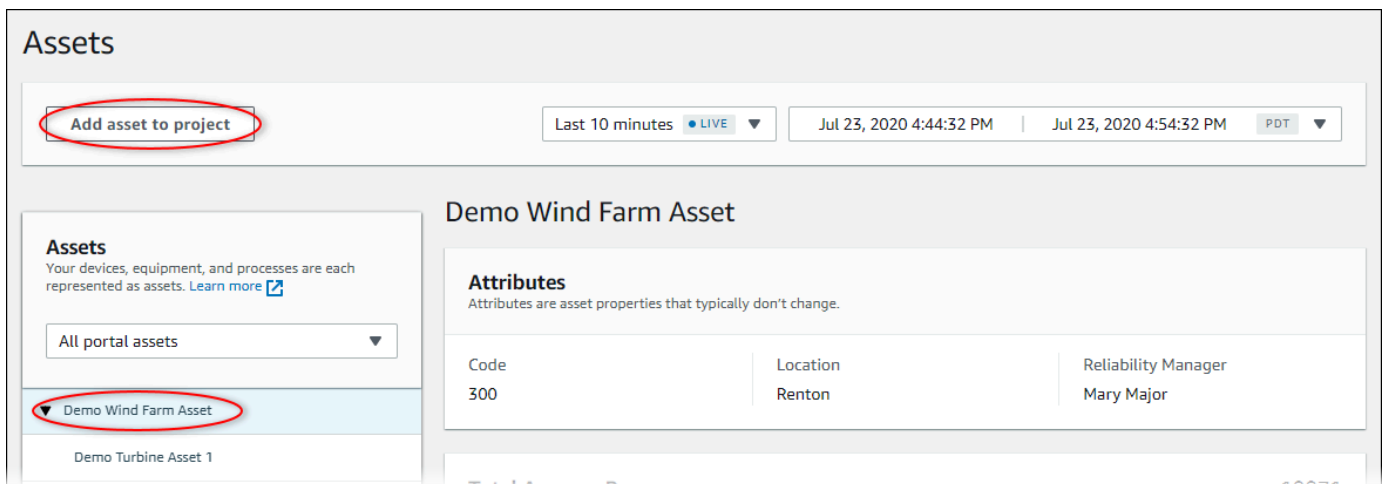

Note

You can add only a single node hierarchy (an asset and all assets that are subordinate to that asset) to a project. To create a dashboard to compare two assets that are children of a common parent asset, add that common parent to the project.

- In the **Add assets to project** dialog box, choose **Create new project**, then choose **Next**.

Add asset to project ✕

Selected node and all of its descendant assets will be added to the project.

Select project or create new project

Create new project

Select existing project

- ▼ Demo Wind Farm Asset
 - Demo Turbine Asset 3
 - Demo Turbine Asset 2
 - Demo Turbine Asset 4
 - Demo Turbine Asset 1

Cancel **Next**

- In **Project name**, enter a name for your project. If you plan to create multiple projects, each with a distinct set of assets, choose a descriptive name.

Create new project ✕

Project name

Wind Farm 3

The project name can have up to 256 characters.

Project description

Contains asset data for Wind Farm #3.

The project description can have up to 2048 characters.

Cancel Previous **Add asset to project**

- In **Project description**, enter a description of the project and its contents.

You can add project owners after you create the project.

- Choose **Add asset to project**.


The **Create new project** dialog box closes, and the new project's page opens.

Adding assets to an existing project


1. In the navigation bar, choose the **Assets** icon.



2. (Optional) Choose a project in the projects drop-down list to show only assets from a specific project.

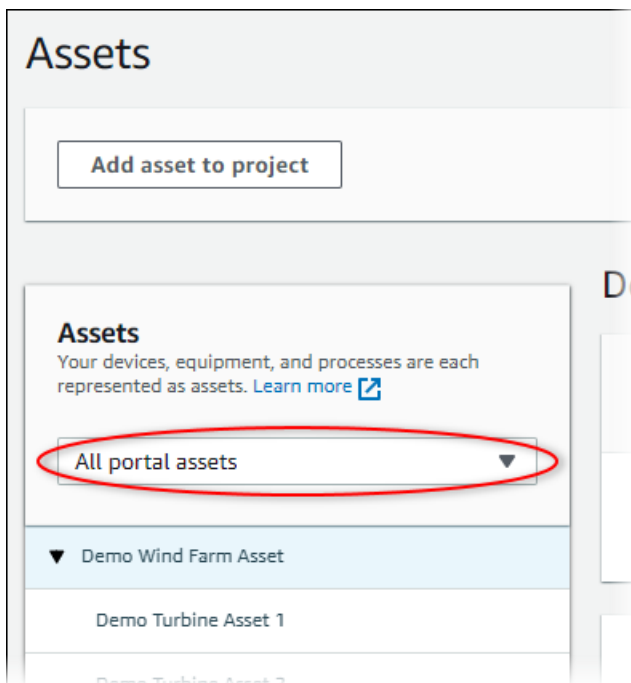


3. Choose an asset in the **Assets** hierarchy, and then choose **Add asset to project**.

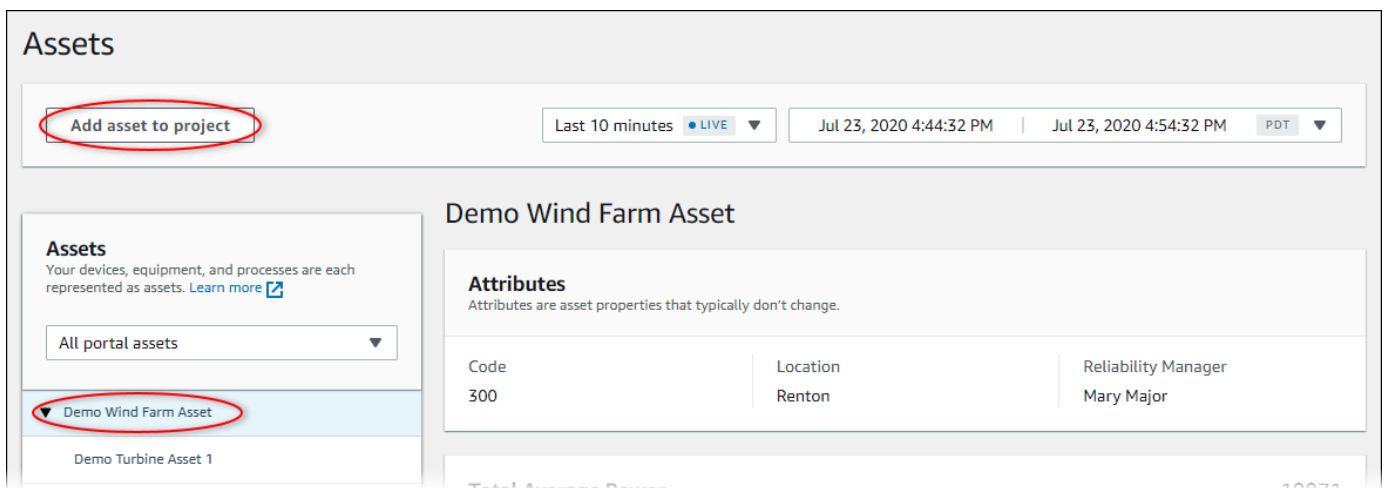

Note

You can add only a single node hierarchy (an asset and all assets that are subordinate to that asset) to a project. To create a dashboard to compare two assets that are children of a common parent asset, add that common parent to the project.

4. In the **Add assets to project** dialog box, choose **Select existing project**, and then choose the project to add the assets.

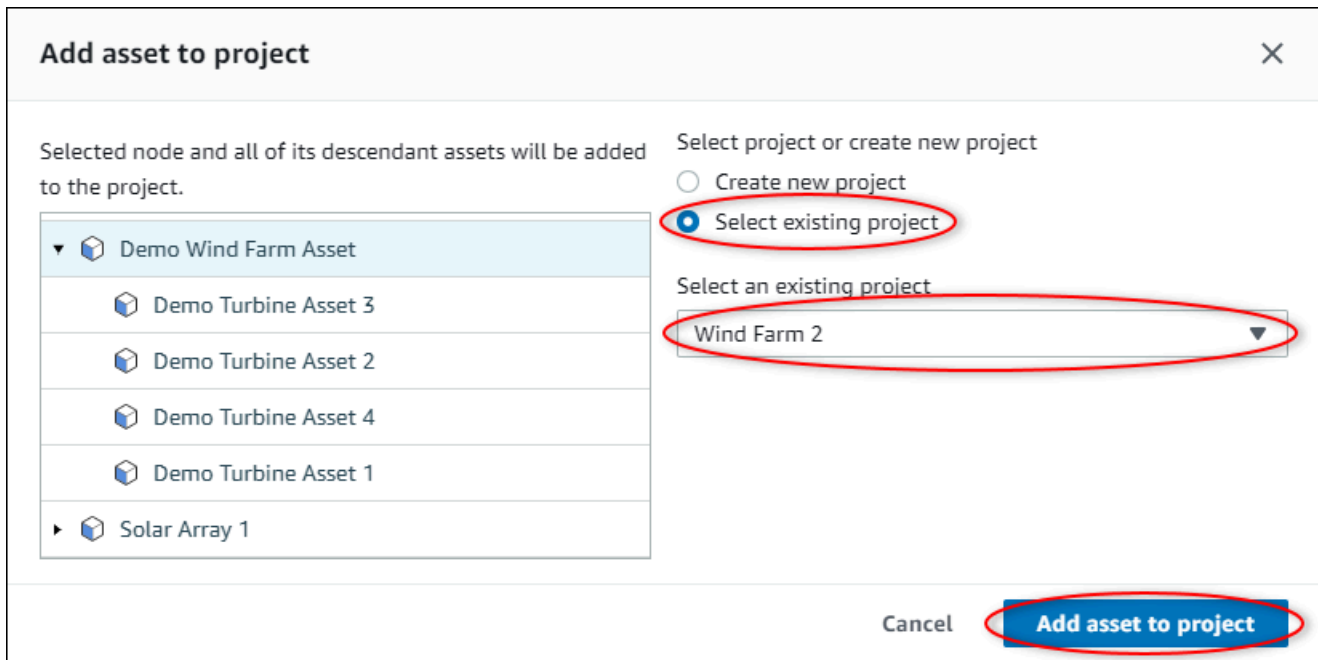

5. Choose **Add asset to project**.

The **Create new project** dialog box closes, and the new project's page opens.

Removing assets from a project


As a portal administrator, you can remove assets from projects if you no longer need them.

To remove assets from a project

1. In the navigation bar, choose the **Projects** icon.




2. On the **Projects** page, choose the project to remove assets from.

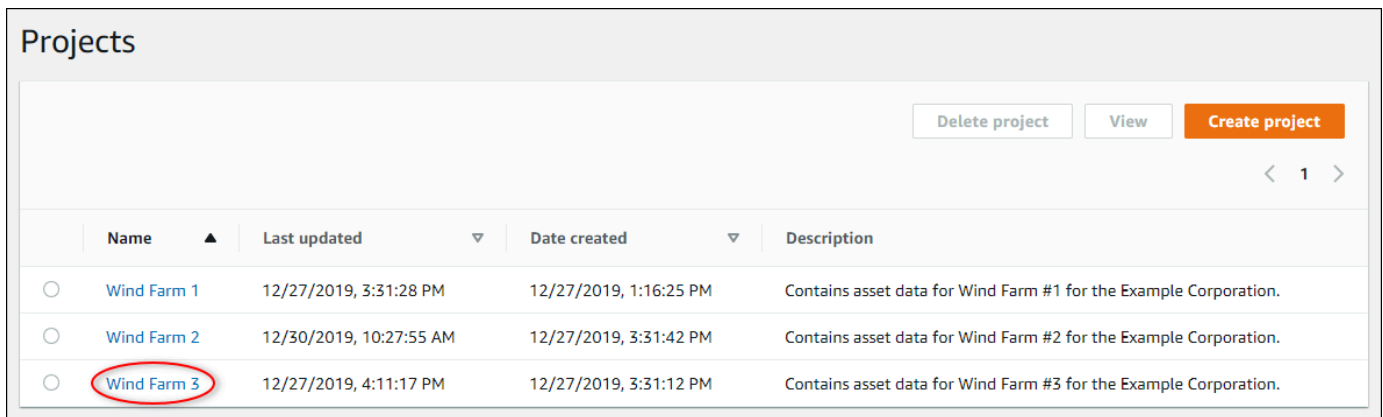

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

3. Choose **Remove all assets from project**.

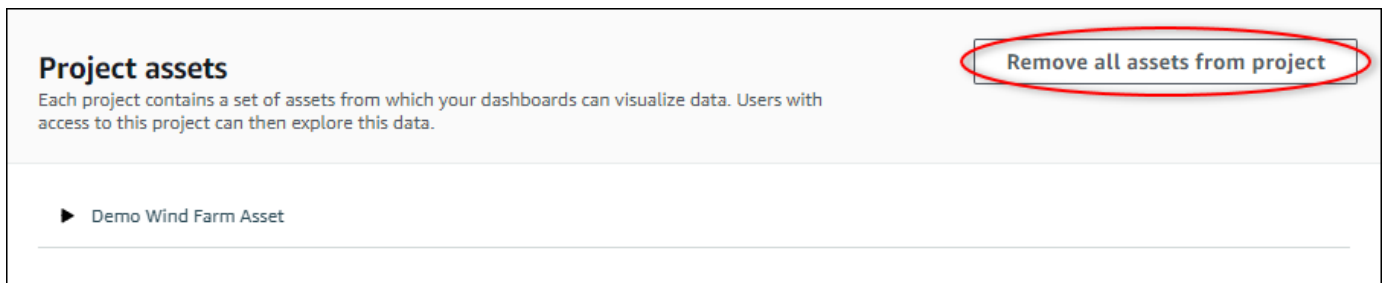

Project assets

Each project contains a set of assets from which your dashboards can visualize data. Users with access to this project can then explore this data.

▶ Demo Wind Farm Asset

Remove all assets from project

4. In the dialog box, confirm that you want to remove the assets.

Assigning project owners

As a portal administrator, after you create a project, you can assign project owners. Project owners create dashboards to provide a consistent way to view your asset data. You can send an invitation email to assigned project owners when you are ready for them to work with the project.

To assign owners to a project

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project to which to assign project owners.

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

3. In the **Project owners** section of the project details page, choose **Add owners** if the project has no owners, or **Edit owners**.

Project owners

Project owners can create dashboards, view asset data, and invite other users to this project as owners or viewers.

Send invitations Remove owners Edit owners

< 1 >

Name	Email
------	-------

You have not invited any other portal users to own this project.

Project owners can modify and update dashboards and project viewers. [Learn more](#)

Add owners

4. In the **Project owners** dialog box, select the check boxes for the users to be owners for this project.

Project owners

Select the portal users you want to be project owners. [Learn more](#)

Portal users

	Name	Email
<input type="checkbox"/>	Mateo Jackson	mateo.jackson@example.com
<input checked="" type="checkbox"/>	Liu Jie	liu.jie@example.com
<input type="checkbox"/>	Martha Rivera	martha.rivera@example.com

Project owners (0)

No results
We could not find any available users

Cancel **Save**

Note

You can only add project owners if they're portal users. If you don't see a user listed, contact your Amazon administrator to add them to the list of portal users.

5. Choose the >> icon to add those users as project owners.
6. Choose **Save** to save your changes.


Next, you can send emails to your project owners so they can sign in and start managing the project.

To send email invitations to project owners

1. In the navigation bar, choose the **Projects** icon.




2. On the **Projects** page, choose the project for which to invite project owners.

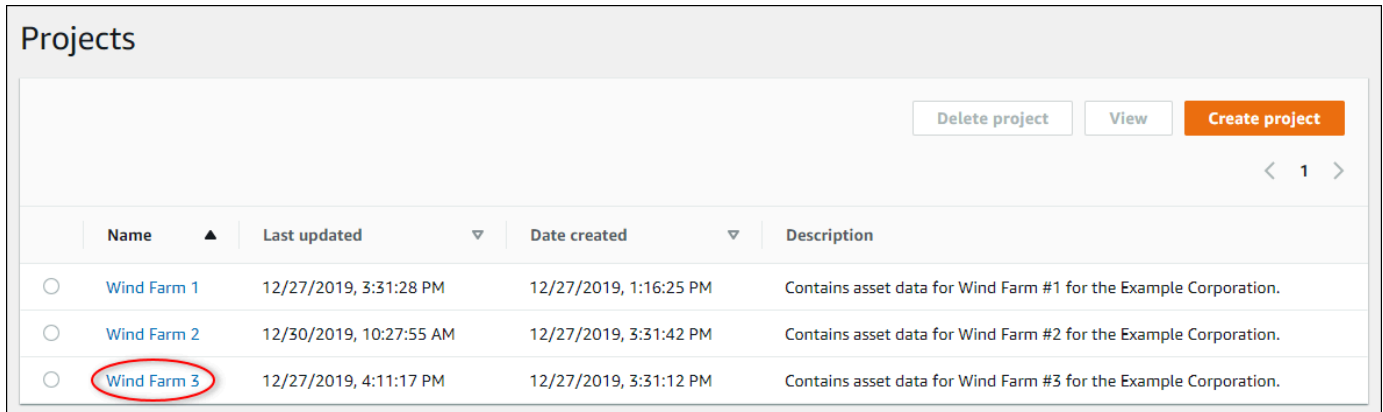

The screenshot shows the 'Projects' page with a table of projects. The table has columns for Name, Last updated, Date created, and Description. The 'Wind Farm 3' row is circled in red.

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

3. In the **Project owners** section of the project details page, select the check boxes for the project owners to receive an email, and then choose **Send invitations**.

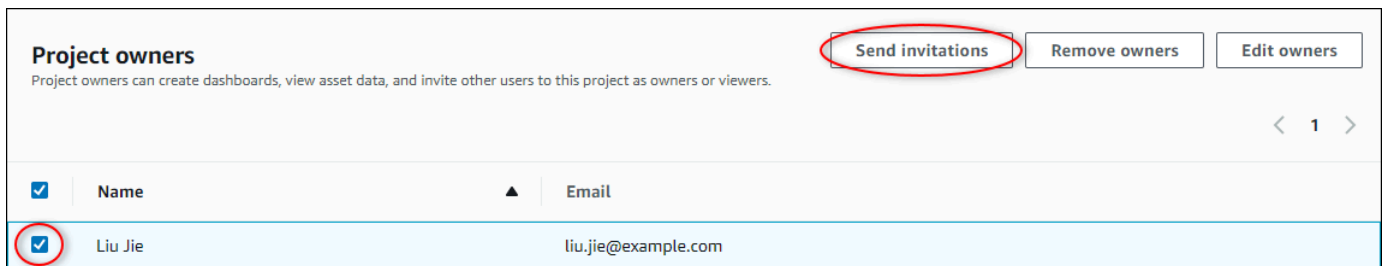

The screenshot shows the 'Project owners' section with a table of project owners. The 'Send invitations' button is circled in red, and the checkbox for 'Liu Jie' is also circled in red.

<input checked="" type="checkbox"/>	Name ▲	Email
<input checked="" type="checkbox"/>	Liu Jie	liu.jie@example.com

4. Your preferred email client opens, prepopulated with the recipients and the email body with details from your project. You can customize the email before you send it to the project owners.

Assigning project viewers

As a project owner or portal administrator, you typically assign viewers to your project after you define a set of dashboards to provide a common view of asset properties and alarms to those viewers.

Note

You must be a project owner or portal administrator to assign viewers to a project.

To assign viewers to a project

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project to which to assign viewers.

Projects

View

< 1 >

	Name ▲	Last updated ▼	Date created ▼	Description	Permissions ▼
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.	Owner

3. In the **Project viewers** section of the project details page, choose **Add viewers** if the project has no viewers, or **Edit viewers**.

Project viewers

Project viewers can view dashboards and view asset data in this project. Project viewers can't edit dashboards or add other users to this project.

Send invitations Remove viewers **Edit viewers**

< 1 >

<input type="checkbox"/>	Name ▲	Email
<p>You have not invited any other portal users to view this project.</p> <p>Project viewers can interact with all of your project's dashboards, but not edit them. Learn more</p> <p style="text-align: center;">Add viewers</p>		

4. In the **Project viewers** dialog box, select the check boxes for the users to be viewers for this project.

Project viewers

Select the portal users you want to be project viewers. [Learn more](#)

Portal users

	Name	Email
<input type="checkbox"/>	Mateo Jackson	mateo.jackson@example.com
<input checked="" type="checkbox"/>	Martha Rivera	martha.rivera@example.com

Project viewers (0)

No results
We could not find any available users

Cancel **Save**

Note

You can only add viewers if they're portal users. If you don't see a user listed, contact your Amazon administrator to add them to the list of portal users.

5. Choose the >> icon to add those users as project viewers.
6. Choose **Save** to save your changes.

Next, you can send emails to your project viewers so they can sign in and start exploring the dashboards in the project.

To send email invitations to project viewers

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project to which to invite project viewers.

Projects

View

< 1 >

	Name ▲	Last updated ▼	Date created ▼	Description	Permissions ▼
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.	Owner
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.	Owner

3. In the **Project viewers** section of the project details page, select the check boxes for the project viewers to receive an email, and then choose **Send invitations**.

Project viewers

Project viewers can view dashboards and view asset data in this project. Project viewers can't edit dashboards or add other users to this project.

Send invitations Remove viewers Edit viewers

< 1 >

<input checked="" type="checkbox"/>	Name ▲	Email
<input checked="" type="checkbox"/>	Martha Rivera	martha.rivera@example.com

4. Your preferred email client opens, prepopulated with the recipients and the email body with details from your project. You can customize the email before you send it to the project viewers.

Changing project details

As a portal administrator, you can change your project name or project owner. If you add a project owner, the new owner receives an email that invites them to the project. If you remove an owner, no email is sent, so you should notify them of the ownership change.

Note

You must be a portal administrator to change project details.

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project to update.

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

3. In the **Project details** section of the project details page, choose **Edit**.

Project details			
Project name Wind Farm 3	Project description Contains asset data for Wind Farm #3 for the Example Corporation.	Last modified 12/27/2019, 4:11:17 PM	Date created 12/27/2019, 3:31:12 PM

4. In the **Project details** dialog box, update the **Project name** and **Project description**.
5. Choose **Update project** to save your changes.

Deleting projects


As a portal administrator, you can delete any project that you don't need. To delete a project, you must first delete or remove all dashboards, associated assets, project owners, and project viewers.

To delete a project

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, select the check box for the project to delete.

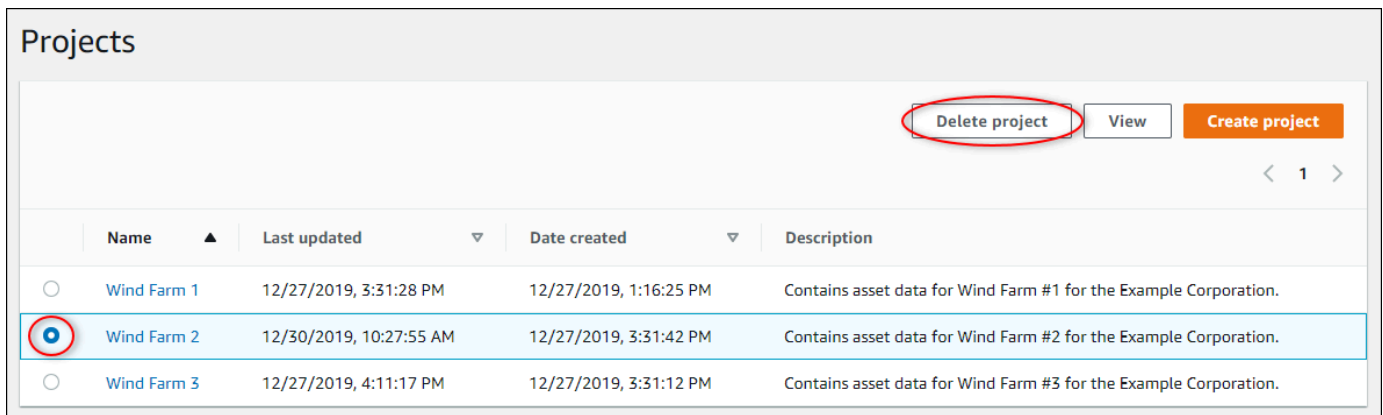

The screenshot shows the 'Projects' interface. At the top right, there are three buttons: 'Delete project' (circled in red), 'View', and 'Create project'. Below the buttons is a table with the following data:

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input checked="" type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

3. Choose **Delete project**.
4. In the **Delete resource** confirmation dialog, choose **Confirm**.

⚠ Important

This action can't be undone.

Visualizing data with Amazon IoT SiteWise Monitor dashboards

You can use Amazon IoT SiteWise Monitor to provide a consistent way to share visualizations of asset properties with the right members of your business. By providing consistent views of your data, you make it easier for others to understand your devices, processes, and equipment. Each project in your Amazon IoT SiteWise Monitor portal contains a set of dashboards that are available to the viewers that you invite to the project.

The project owner is responsible for creating a set of dashboards and visualizations for the asset properties and alarms associated with the project. As a project owner, you decide which properties and alarms make sense to be viewed together, and what type of visualization is easiest for your viewers to understand the data. You can also configure thresholds for visualizations to indicate when data exceeds normal operating ranges. If a property has an alarm, the visualization automatically shows that alarm as a threshold.

You can perform the following data visualization tasks:

Task	Required role	Description
Viewing dashboards	Portal administrator, project owner, and project viewer	View the dashboards to which you have been given access.
Creating dashboards	Portal administrator, project owner	Create a dashboard in a project.
Adding visualizations	Portal administrator, project owner	Add a visualization to a dashboard.
Customizing visualizations	Portal administrator, project owner	Change the type of visualization and configure other features, such as thresholds and trend lines.
Adjusting dashboard layout	Portal administrator, project owner	Change the size or location of visualizations in a dashboard.

Task	Required role	Description
Deleting dashboards	Portal administrator, project owner	Delete dashboards that you don't need.

Viewing dashboards

Amazon IoT SiteWise Monitor enables you to provide consistent views of your asset data to the right set of people. Portal administrators, project owners, and project viewers can view all dashboards that are defined for their projects. You can view all of your dashboards in one place on the **Dashboards** page or you can view dashboards from a project page.

To view a dashboard from the dashboards page

1. In the navigation bar, choose the **Dashboards** icon.



2. In the **Filter by project** drop-down list, choose the project whose dashboards you want to view.

The screenshot shows the 'Dashboards' page interface. At the top, there is a 'Filter by project' dropdown menu with 'Wind Farm 1' selected, circled in red. To the right of the dropdown are three buttons: 'Open', 'Delete', and 'Create dashboard'. Below the dropdown is a table listing dashboards. The table has columns for 'Name', 'Last updated', 'Project', and 'Date created'. The table contains five rows of dashboard data.

<input type="checkbox"/>	Name	Last updated	Project	Date created
<input type="checkbox"/>	Turbine 1	12/27/2019, 1:54:05 PM	Wind Farm 1	12/27/2019, 1:52:33 PM
<input type="checkbox"/>	Turbine 2	12/27/2019, 1:55:09 PM	Wind Farm 1	12/27/2019, 1:54:18 PM
<input type="checkbox"/>	Turbine 3	12/27/2019, 1:55:57 PM	Wind Farm 1	12/27/2019, 1:55:12 PM
<input type="checkbox"/>	Turbine 4	12/27/2019, 1:56:47 PM	Wind Farm 1	12/27/2019, 1:56:03 PM
<input type="checkbox"/>	Wind Farm Dashboard	7/8/2020, 9:43:06 AM	Wind Farm 1	12/27/2019, 1:18:22 PM

You can sort the list of dashboards by using the column headings.

Note

If you can't find a particular project, you might not have been invited to view that project. Contact the project owner to request an invitation.

- In the **Dashboards** list, choose a dashboard to view.

To view a dashboard from a project page

- In the navigation bar, choose the **Projects** icon.



- On the **Projects** page, choose the project whose dashboards you want to view.

Projects

Delete project View Create project

< 1 >

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

- In the **Dashboards** section of the project details page, choose **Open in dashboards** for the dashboard to view. You can also select the check box next to the dashboard, and then choose **Open**.

Dashboards


Your team can use dashboards to organize data in custom visualizations. In each dashboard, you can adjust the time period to explore your live and historical data, analyze trends, and identify issues. [Learn more](#)

Delete Open Create dashboard

< 1 >

<input type="checkbox"/>	Name ▲	Last updated ▼	Date created ▼
<input type="checkbox"/>	Turbine 1	12/27/2019, 1:54:05 PM	12/27/2019, 1:52:33 PM
<input type="checkbox"/>	Turbine 2	12/27/2019, 1:55:09 PM	12/27/2019, 1:54:18 PM
<input type="checkbox"/>	Turbine 3	12/27/2019, 1:55:57 PM	12/27/2019, 1:55:12 PM
<input type="checkbox"/>	Turbine 4	12/27/2019, 1:56:47 PM	12/27/2019, 1:56:03 PM
<input type="checkbox"/>	Wind Farm Dashboard	7/8/2020, 9:43:06 AM	12/27/2019, 1:18:22 PM

4. You can browse the visualizations available in the dashboard.

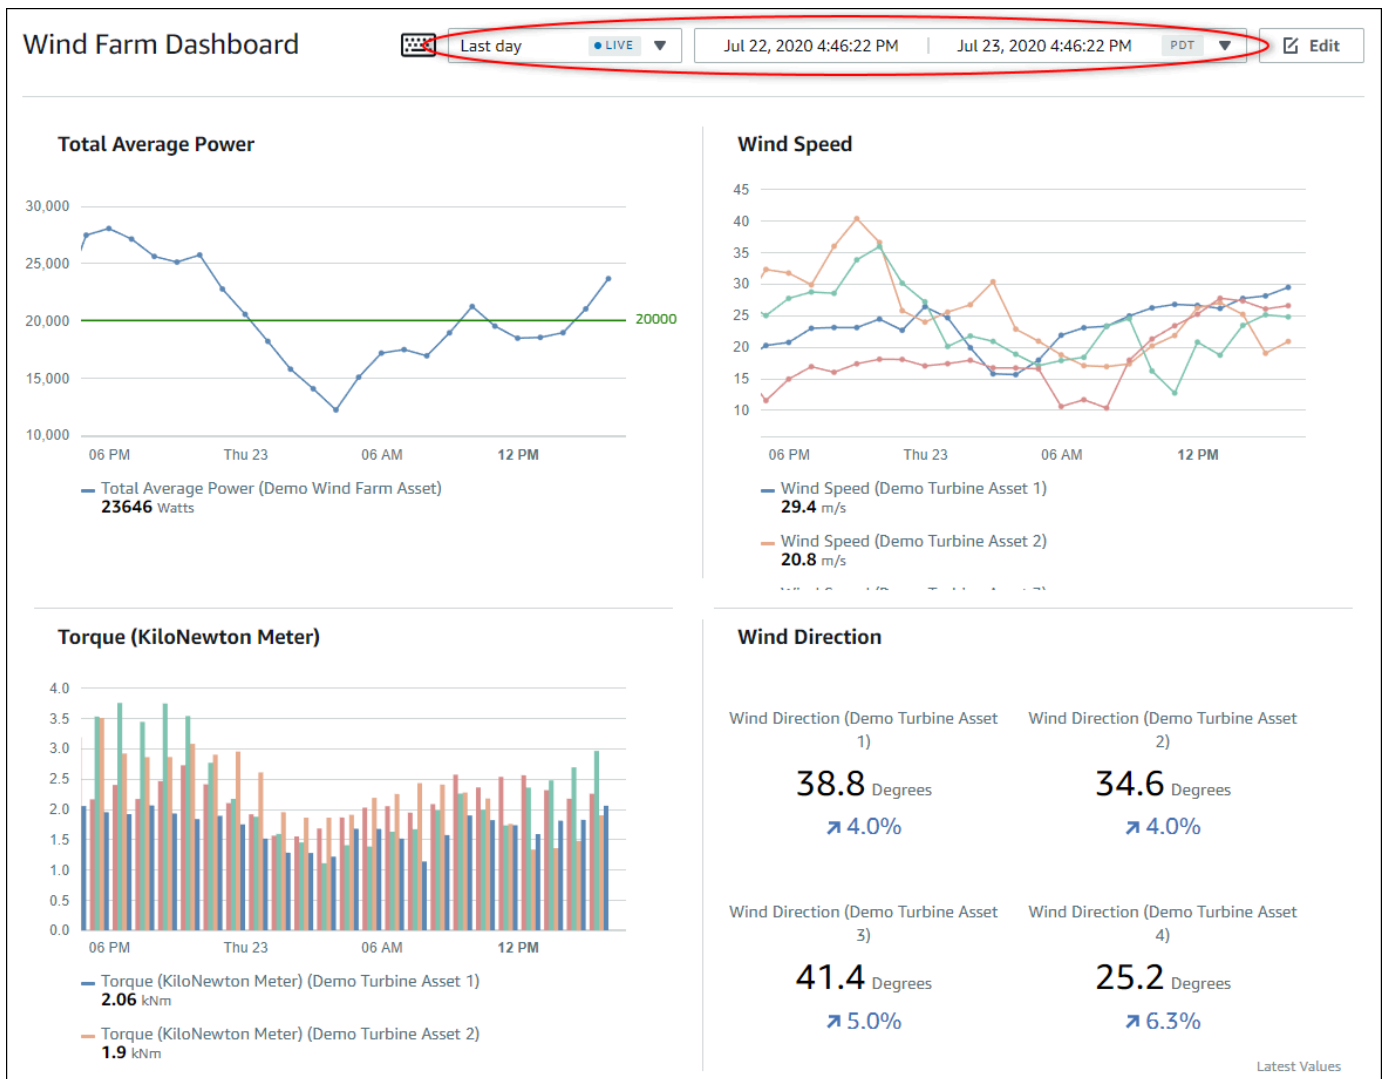

5. You can [adjust the time range for your data](#). If you're a project owner or portal administrator, you can modify the dashboard. For more information, see [Adding visualizations](#).

Adjusting the dashboard time range


When you view a dashboard, you can change the time range of the displayed data. With this feature, you can compare recent behavior with past behavior or focus on a specific time range. You can choose from a set of predefined time ranges, or you can specify the exact start and end of the time range to view. You can also restore the view to show live data.

Note

Each dashboard page has its own **Time range**. If you change the **Time range** for one dashboard, this doesn't change it for other dashboards. All visualizations on a dashboard use the time range you choose.


To use a predefined time range

- In the time range drop-down list, choose a time range to view.

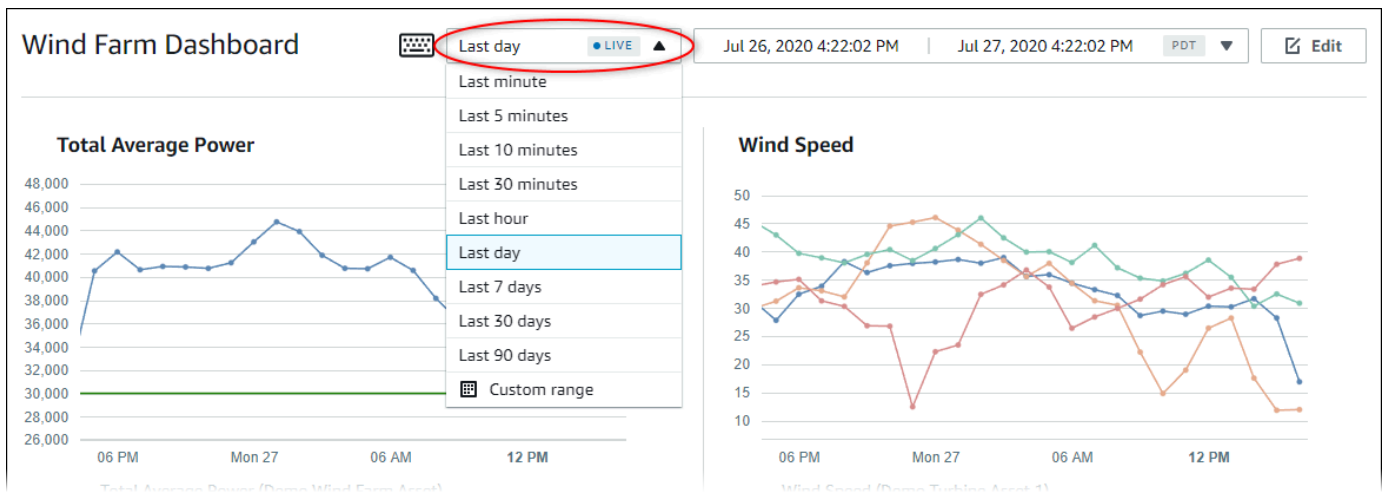

To use a custom time range

- Choose the time range control to open the calendar.

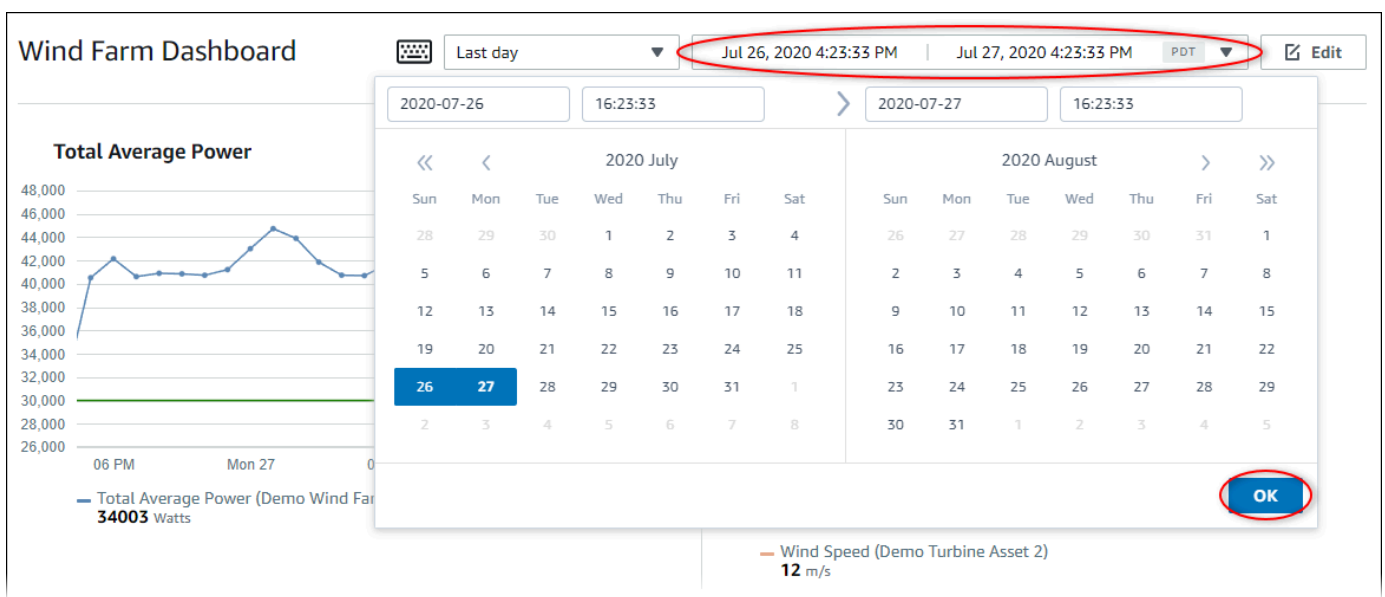

2. Choose the start and end for your time range. In the example screen capture, the start date is July 26 and the end date is July 27.
3. Choose **OK** to apply your changes.

To zoom in or out in a visualization

1. Click and drag a time range on one of the line or bar charts to zoom in to the selected time range.
2. Double-click on a time range to zoom in on the selected point.
3. Press **Shift** and then double-click on a time range to zoom out from the selected point.

To shift the selected time range

- Press **Shift** and then drag the mouse on a time range to shift the range left or right.

Creating dashboards

As a project owner, you create dashboards in Amazon IoT SiteWise Monitor to provide a shared view of asset properties and alarms to your project viewers. You can create a dashboard from the **Dashboards** page or while viewing a project's details.

To create a dashboard from the dashboards page


1. In the navigation bar, choose the **Dashboards** icon.



2. On the **Dashboards** page, choose **Create dashboard**.



3. In the dashboard editor, change the dashboard name from the default, **New dashboard**, to something that describes the content.

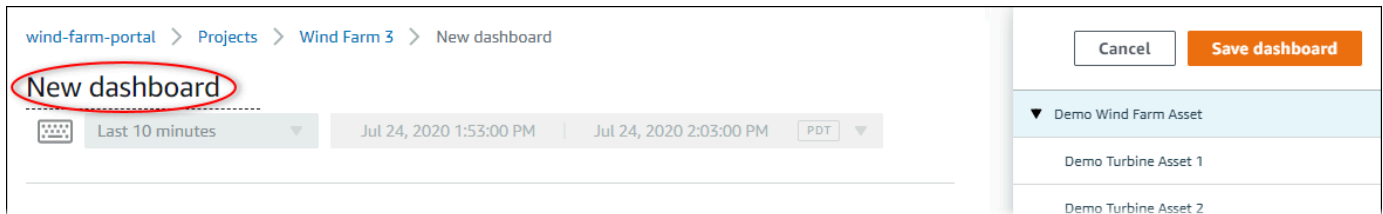


4. Add one or more visualizations. For more information, see [Adding visualizations](#).
5. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

To create a dashboard while viewing a project's details


1. In the navigation bar, choose the **Projects** icon.




2. On the **Projects** page, choose the project in which you want to create a dashboard.

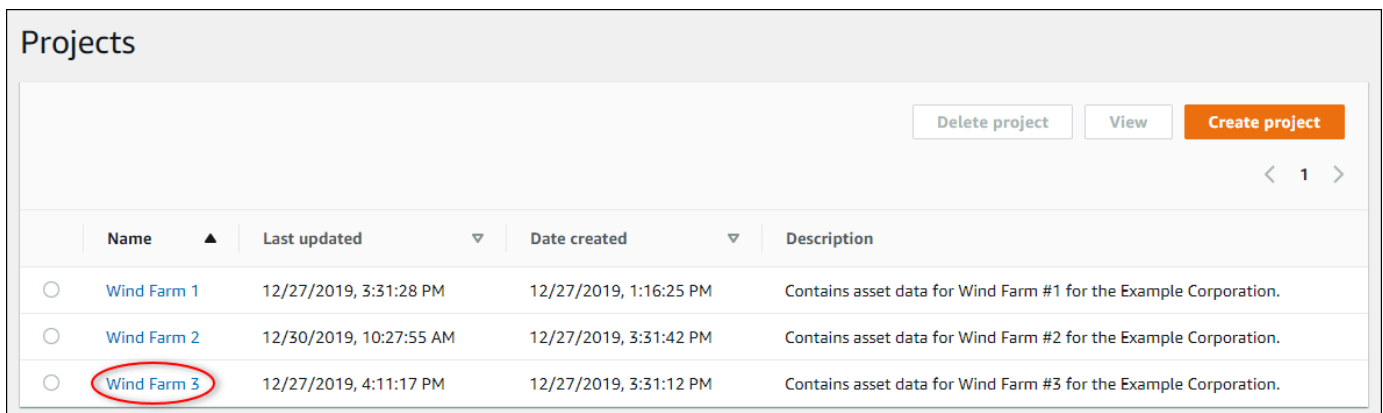

3. In the **Dashboards** section, choose **Create dashboard**.

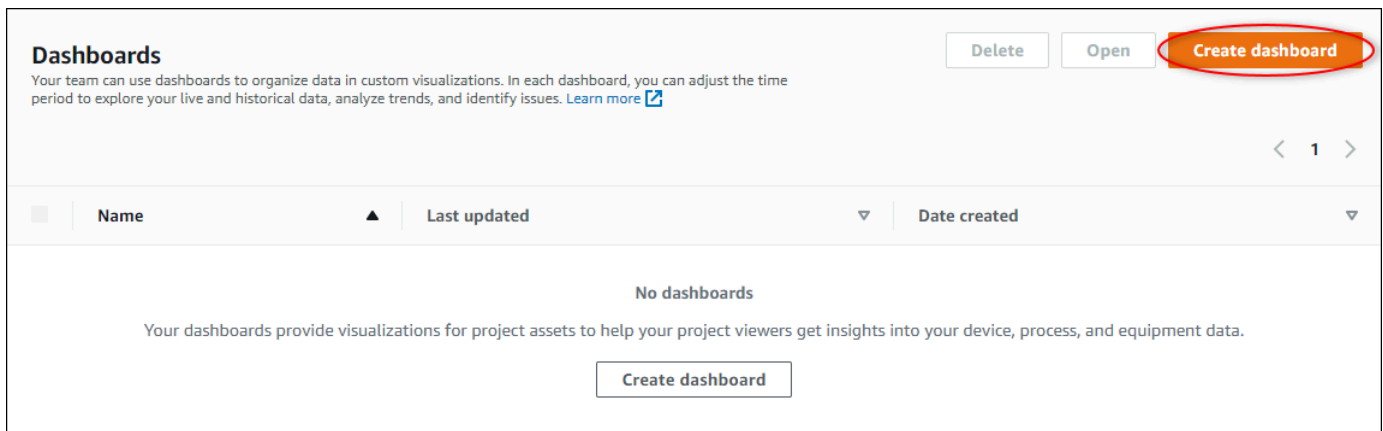

4. In the dashboard editor, change the dashboard name from the default, **New dashboard**, to something that describes the content.

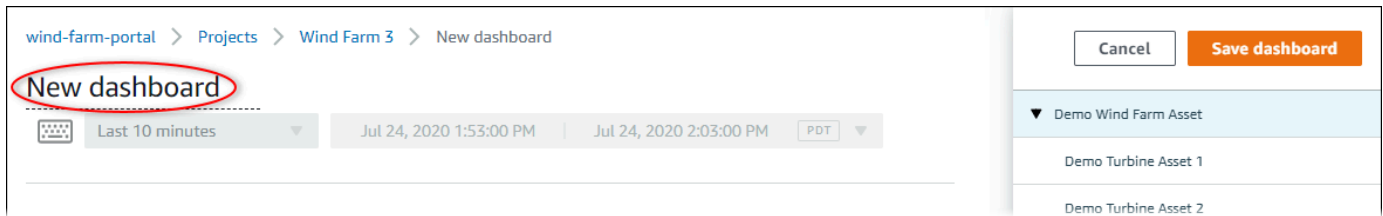

5. Add one or more visualizations. For more information, see [Adding visualizations](#).
6. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Adding visualizations

In Amazon IoT SiteWise Monitor, a dashboard is a group of visualizations. As a project owner, you decide which asset properties and alarms appear in each dashboard, and how they are best represented. For more information about the available visualization types, see [Choosing visualization types](#).

There are three steps to add a visualization to a dashboard:

1. [Editing a dashboard](#) – Open the dashboard for editing.
2. [Dragging a property or alarm to a dashboard](#) – Drag a property or alarm to the dashboard.
3. [Customizing visualizations](#) – Customize the visualization by choosing the ideal visualization and setting its properties and alarms.

Editing a dashboard

After you create a dashboard and add your visualizations, you can update your dashboard to change how it appears.

To edit a project's dashboard

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project whose dashboards you want to edit.

Projects

Delete project View **Create project**

< 1 >

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

3. In the **Dashboards** section, choose a dashboard to edit.

Dashboards

Your team can use dashboards to organize data in custom visualizations. In each dashboard, you can adjust the time period to explore your live and historical data, analyze trends, and identify issues. [Learn more](#)

Delete Open **Create dashboard**

< 1 >

<input type="checkbox"/>	Name ▲	Last updated ▼	Date created ▼
<input type="checkbox"/>	Turbine 1	12/27/2019, 1:54:05 PM	12/27/2019, 1:52:33 PM
<input type="checkbox"/>	Turbine 2	12/27/2019, 1:55:09 PM	12/27/2019, 1:54:18 PM
<input type="checkbox"/>	Turbine 3	12/27/2019, 1:55:57 PM	12/27/2019, 1:55:12 PM
<input type="checkbox"/>	Turbine 4	12/27/2019, 1:56:47 PM	12/27/2019, 1:56:03 PM
<input type="checkbox"/>	Wind Farm Dashboard	7/8/2020, 9:43:06 AM	12/27/2019, 1:18:22 PM

4. In the dashboard, choose **Edit** in the upper right.

You can now rename the dashboard, or add, remove, or modify visualizations.

5. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Dragging a property or alarm to a dashboard

You add visualizations to the dashboard by dragging asset properties and alarms onto the dashboard. You can drag them onto an empty space to create a visualization or onto an existing visualization to add that property or alarm to those already in the visualization. You can add up to five asset properties or alarms to each visualization. Only portal administrators and project

owners can edit dashboards. For more information about how to open a dashboard to change it, see [Editing a dashboard](#).

1. Browse the list of project assets on the right side of the dashboard. When you find a property or alarm to visualize, drag it to the dashboard.
 - The default visualization type for properties is the [line chart](#).
 - The default visualization type for alarms is the [status grid widget](#).

Note

You can drag multiple properties and alarms onto a single visualization.

wind-farm-portal > Projects > Wind Farm 3 > New dashboard

New dashboard

Last 10 minutes Jul 24, 2020 1:53:00 PM Jul 24, 2020 2:03:00 PM PDT

Drag data here

Cancel Save dashboard


▼ Demo Wind Farm Asset

- Demo Turbine Asset 1
- Demo Turbine Asset 2
- Demo Turbine Asset 3
- Demo Turbine Asset 4

Properties for "Demo Wind Farm Asset"


Code	300
Total Average Power	19934 Watts
Total Overdrive State Time	0 seconds

2. To change how your data displays, choose the visualization type.

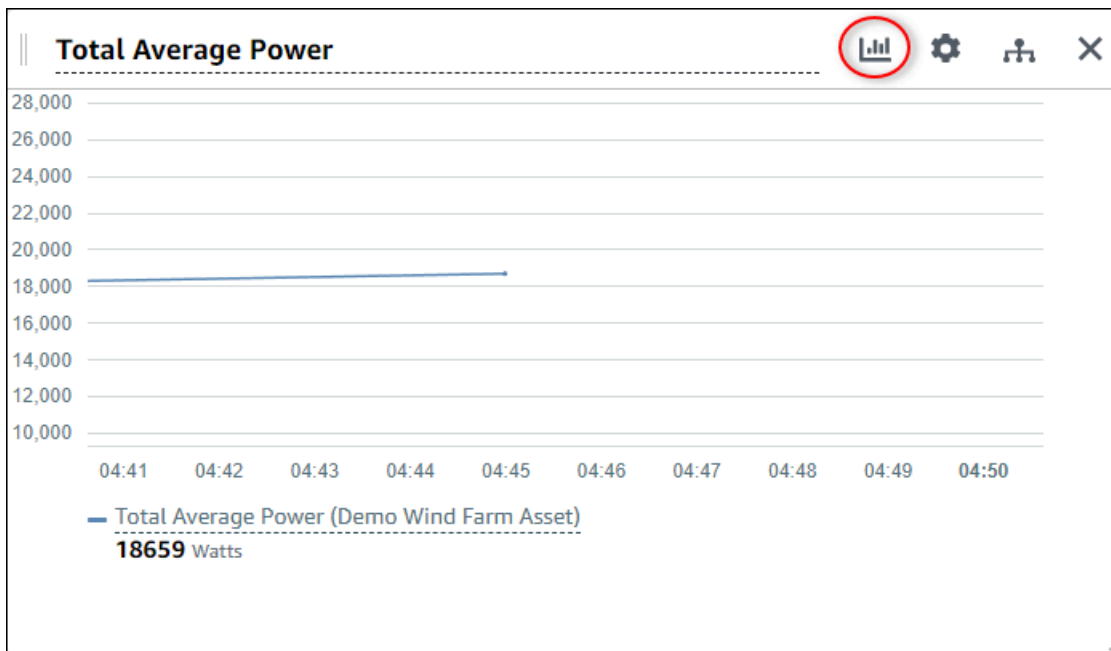

For more information about the available visualization types, see [Choosing visualization types](#). To customize details of the visualization, see [Customizing visualizations](#).

3. To add thresholds to your property, choose the visualization configuration icon. If you add a property that has an alarm, the visualization displays that alarm's threshold. For more information, see [Configuring thresholds](#).

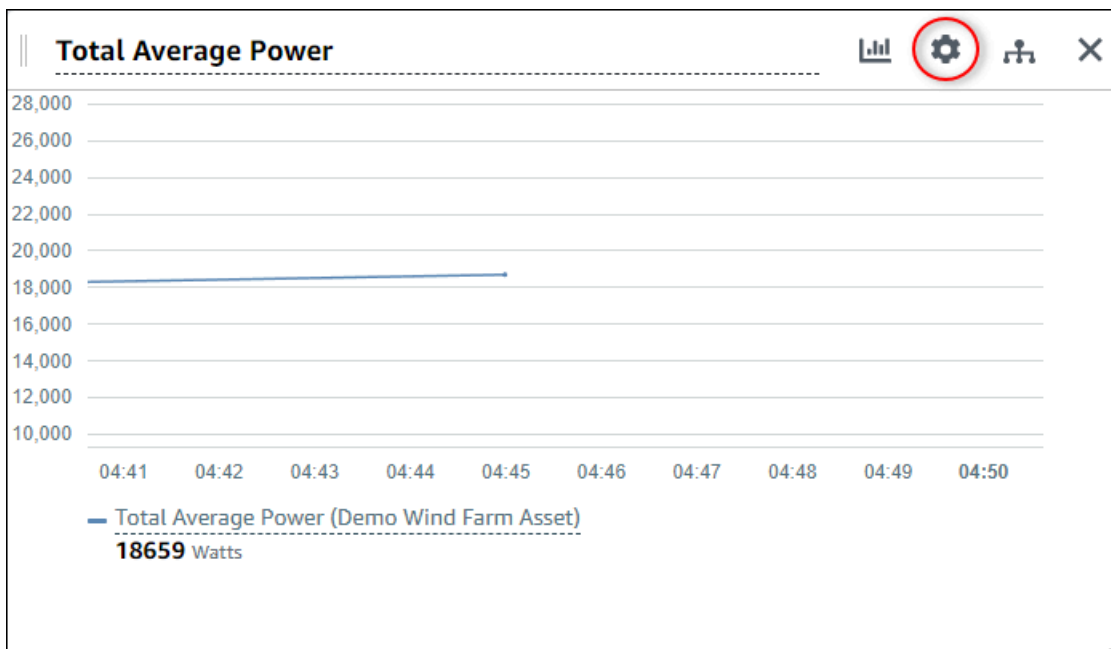

4. To move or resize your visualization, see [Adjusting dashboard layout](#).

Customizing visualizations

As a project owner, you can choose how to best view the asset properties and alarms that you add to your dashboard. You can control the visualization type and customize the visualization.

Topics


- [Changing visualization types](#)
- [Adding data to a visualization](#)
- [Removing data from a visualization](#)
- [Deleting a visualization](#)
- [Choosing visualization types](#)
- [Configuring thresholds](#)
- [Configuring trend lines](#)

Changing visualization types


As the project owner, you decide how each asset property or alarm is best represented.

To change the visualization type

1. Choose the **Visualization type** icon for the visualization to change.

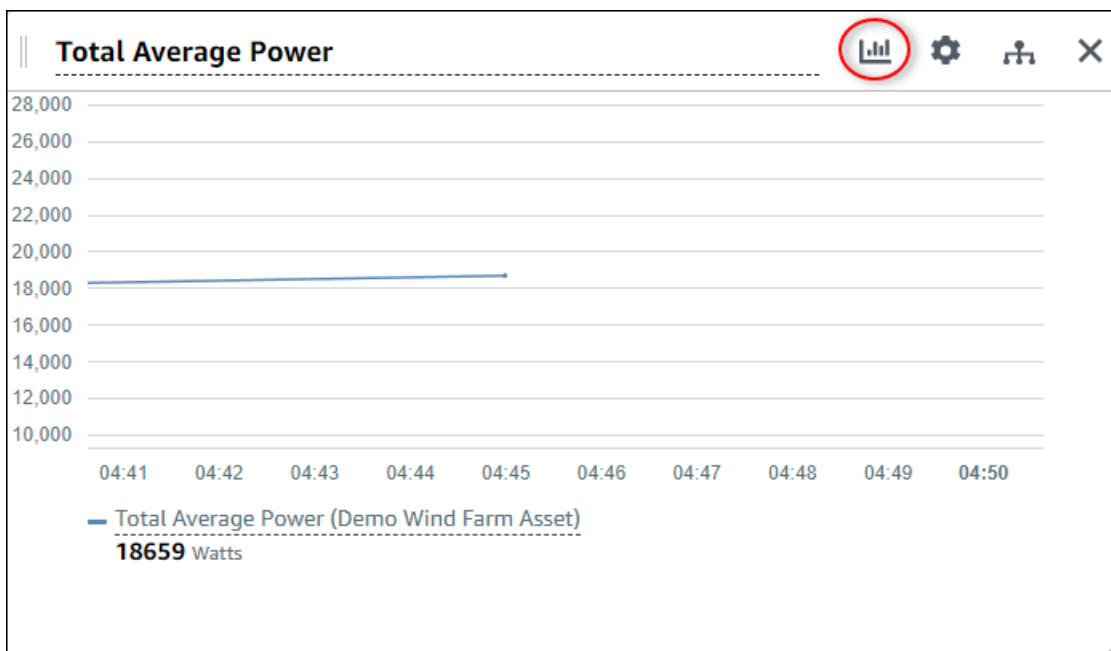

2. In the visualization type bar, choose the icon for the type of visualization to apply.

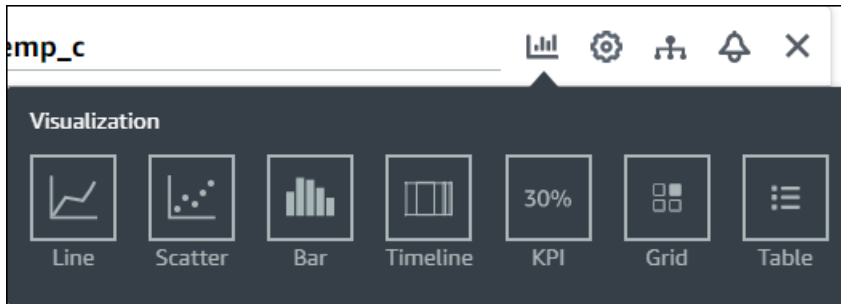

For more information, see [Choosing visualization types](#).

3. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Adding data to a visualization

As a project owner, you might want to show multiple asset properties and alarms in the same visualization. For example, you might show the temperature of all of your pumps, or the performance and efficiency for a single asset.

To add data to a visualization

1. Drag the asset property or alarm that you want to add to a visualization. When you add a property that has an alarm, you also automatically add that alarm as a threshold.


- After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Removing data from a visualization


You can remove asset properties and alarms from visualizations to no longer display them.

To remove data from a visualization

- Choose the **Added assets** icon for the visualization to change.

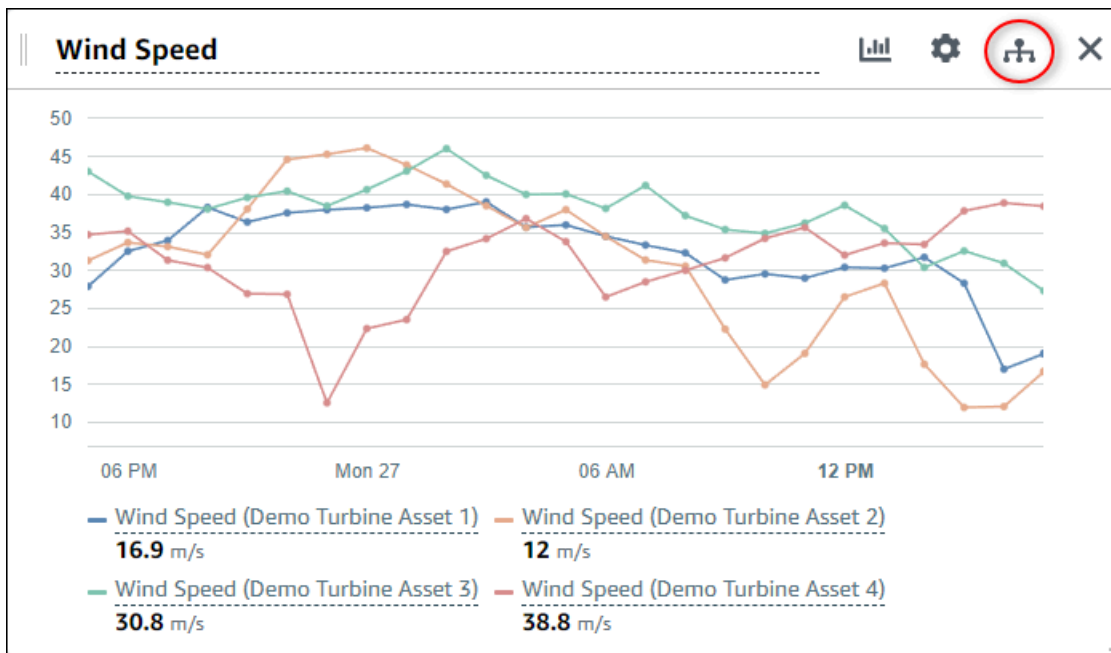

- Choose the X icon on an asset property or alarm to remove it from the visualization.

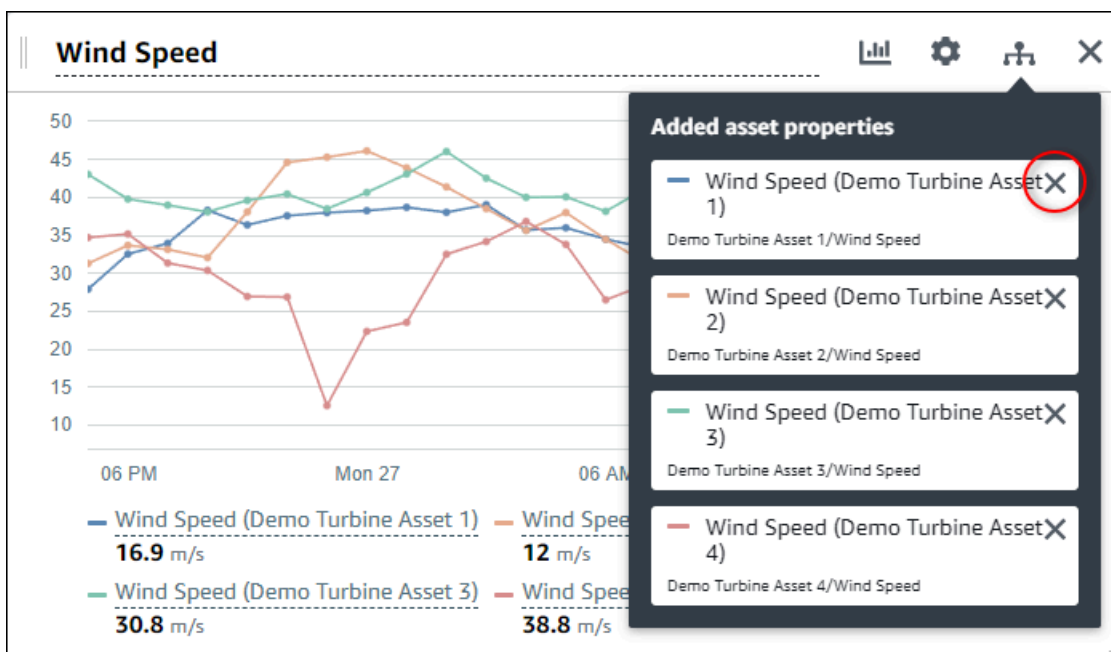


- After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Deleting a visualization

As a project owner, if you decide that a visualization isn't needed, you can easily remove it from a dashboard.

To delete a visualization

1. Choose the **X** icon for the visualization to remove.

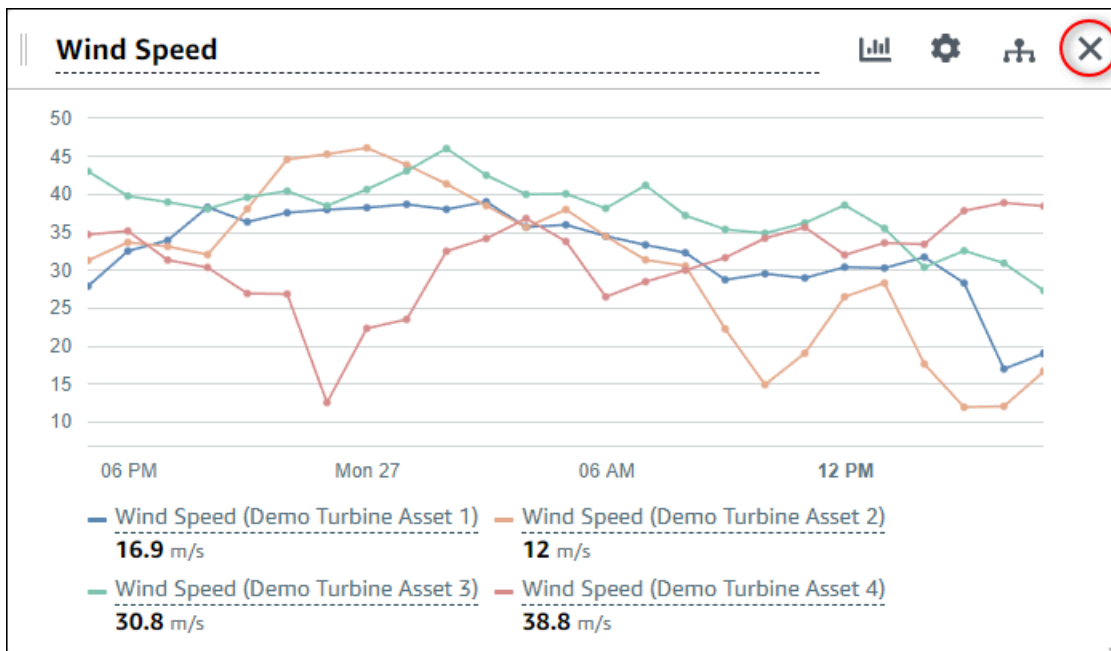

2. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Choosing visualization types

This section describes the available visualization types. To understand your devices, processes, and equipment, you should choose the right type of visualization for each asset property that you add to a dashboard. Each visualization type is covered in detail in this section. Changing the visualization type doesn't change your data, so you can try different visualizations to discover which type helps you and your project's viewers gain insights from the data.

Type	Description	Displays alarm state
Line	Best used for properties with frequently reported values where you want to see the trend over time.	No
Scatter	Best used for properties with frequently reported values where you want to see the individual data points.	No
Bar	Best used for properties with infrequently reported values, such as daily metrics, where you want to see the trend over time. You can also use bar charts to compare values between multiple properties.	No
Status	Best used for alarms and properties that have a small number of states, such as high, medium, and low. You can visualize current status as a grid or historical status as a timeline.	Yes
KPI	Best used for properties where the latest value is the most important piece of information.	No
Table	Best used to compare values between multiple properties or alarms and display	Yes


Type	Description	Displays alarm state
	information in one compact widget.	

Line

A line graph is a good way to visualize time series data that fluctuates over time. When you drag a time series property to the dashboard, the values for that property are shown as a line graph by default. If that property has an alarm, the line chart shows that alarm's threshold.

Example

The following line chart shows four asset properties.

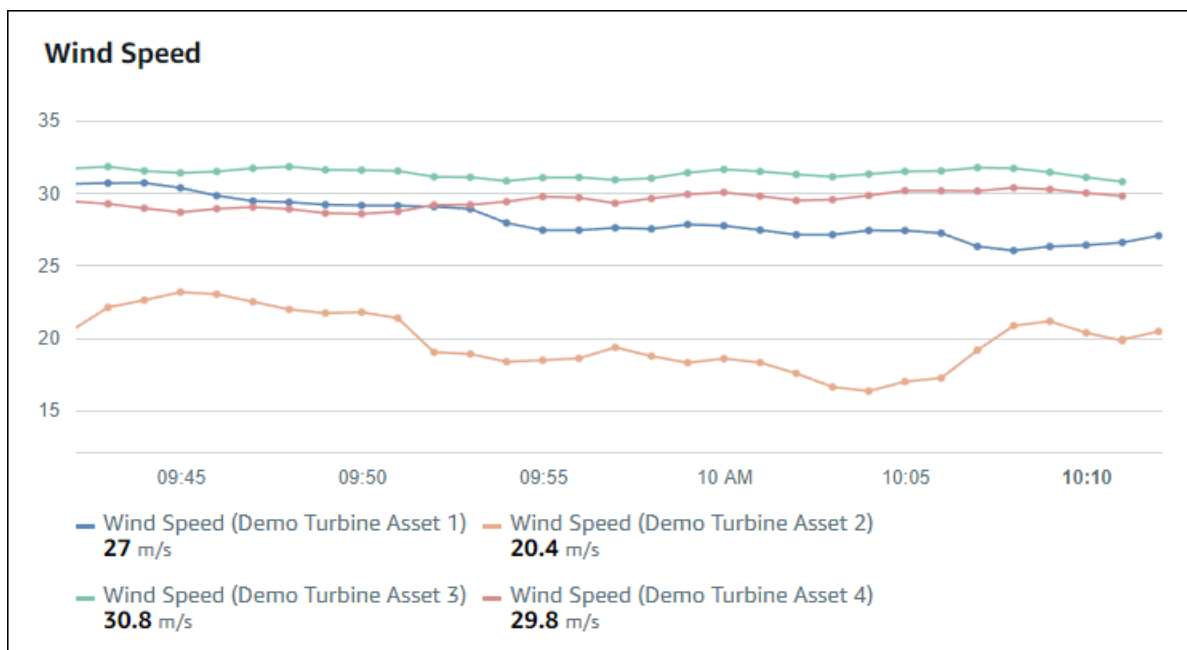

To display a line graph, choose the line graph icon from the visualization type menu.




Scatter

You can use a scatter chart to visualize time series data with distinct data points. A scatter chart looks like a line graph without lines between data points. If you add a property that has an alarm, the scatter chart shows that alarm's threshold.

Example

The following scatter chart shows one asset property.

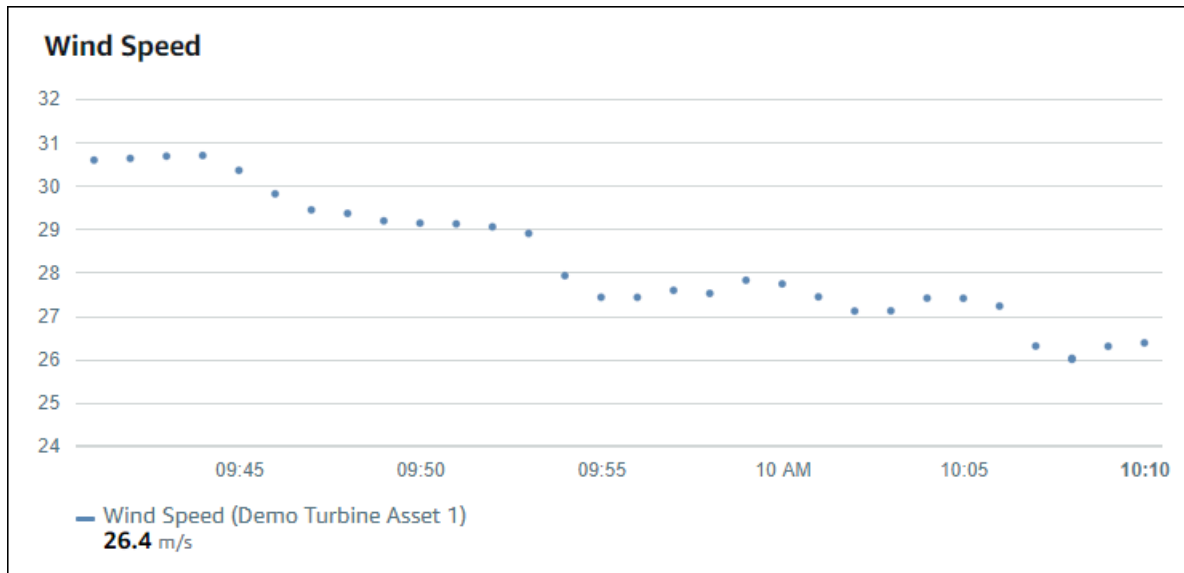

To display a scatter chart, choose the scatter icon from the visualization type menu.




Bar

A bar chart is another way to visualize time series data. You might use a bar chart when your data values change infrequently, such as daily readings. If you add a property that has an alarm, the bar chart shows that alarm's threshold.

Example

The following bar chart shows four asset properties.

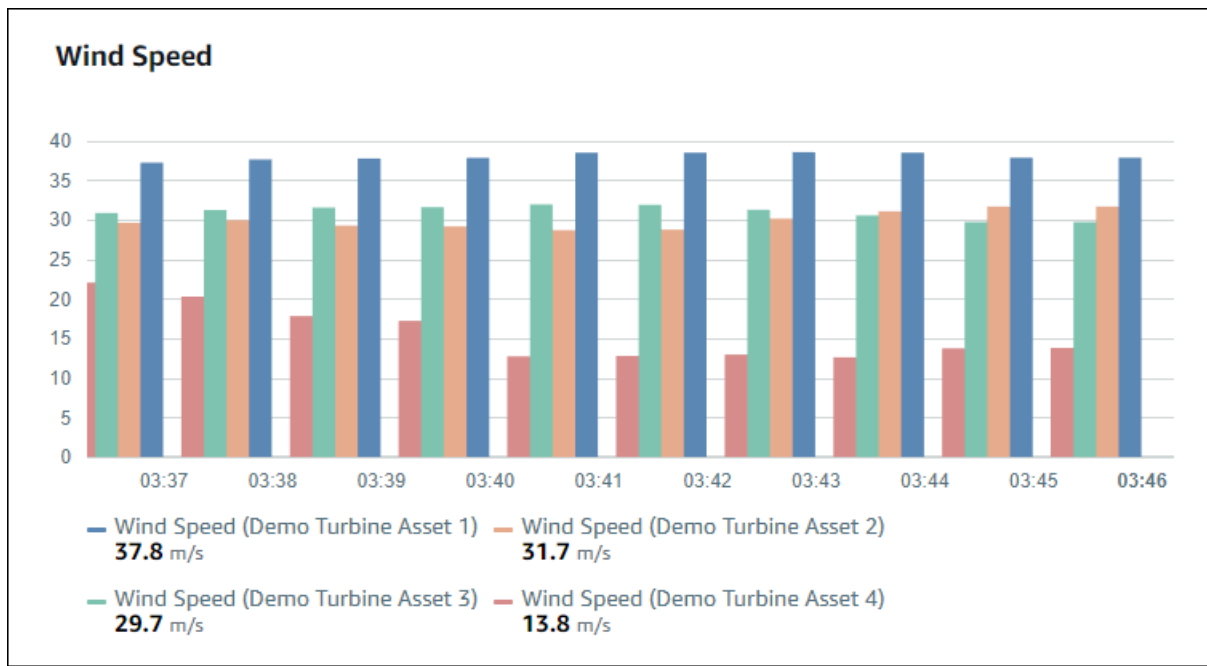

To display a bar graph, choose the bar graph icon from the visualization type menu.



Status

A status widget is a good way to visualize data that has a small number of well-defined states, such as an alarm. For example, if you have a pressure indicator that can be high, medium, or low, you could display each state in a different color with a status grid.

You can configure a status widget to show current status as a grid or historical status as a timeline.


Topics

- [Status grid](#)
- [Status timeline](#)
- [Configuring status widgets](#)

Status grid

Example

The following status grid shows the status of four asset properties.

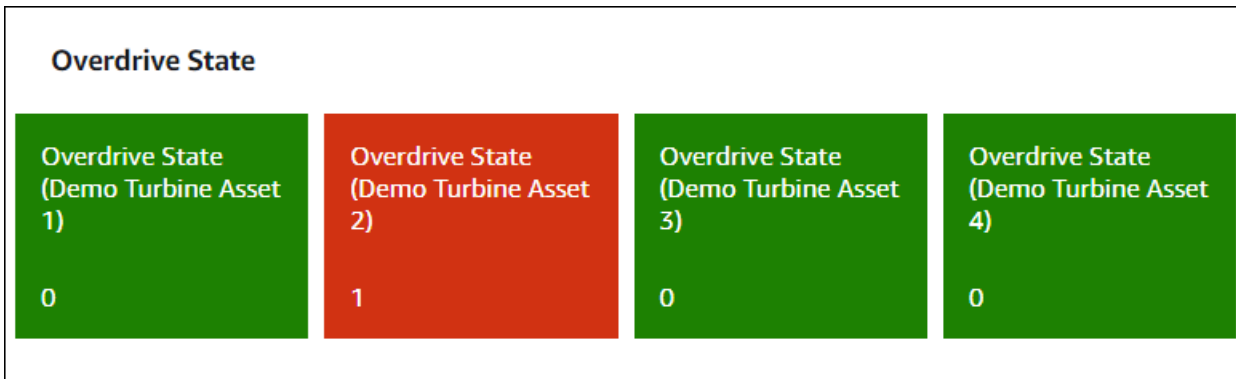


To display a status grid widget, choose the status grid icon from the visualization type menu.



Status timeline

Example

The following status timeline shows the status over time for four asset properties.

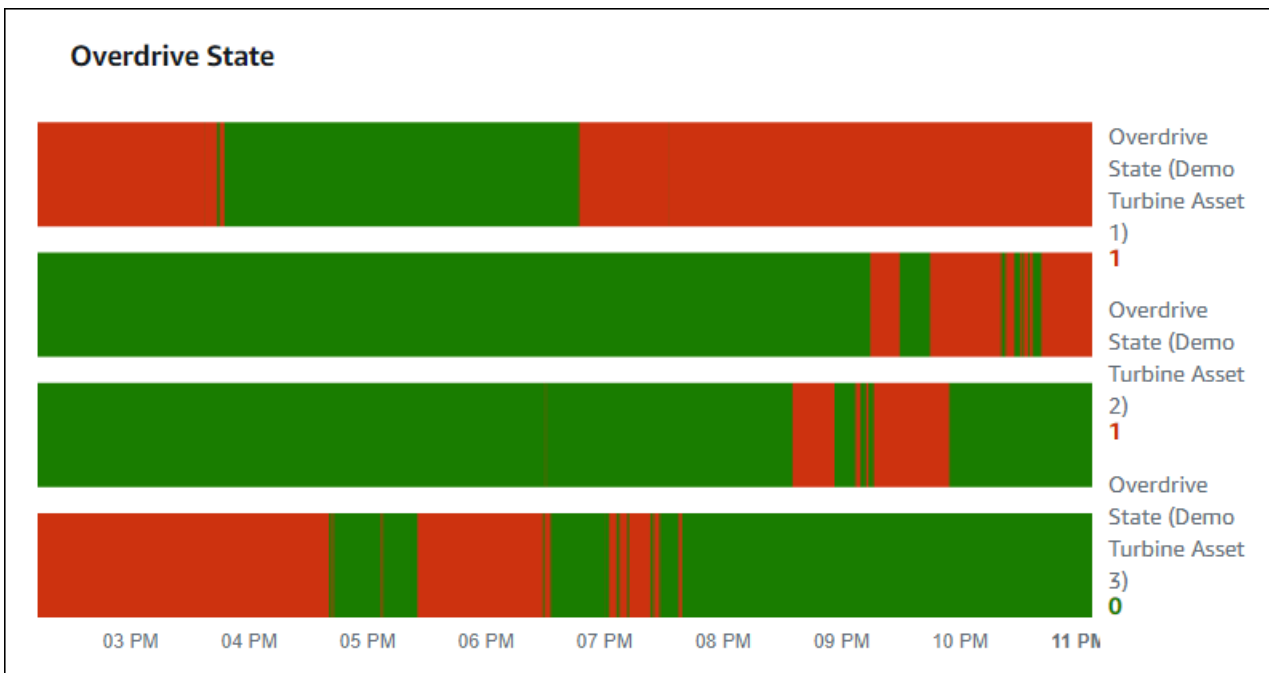


To display a status timeline widget, choose the status timeline icon from the visualization type menu.



Configuring status widgets

To set status colors, configure thresholds with the color and rule for each status. For more information, see [Configuring thresholds](#).

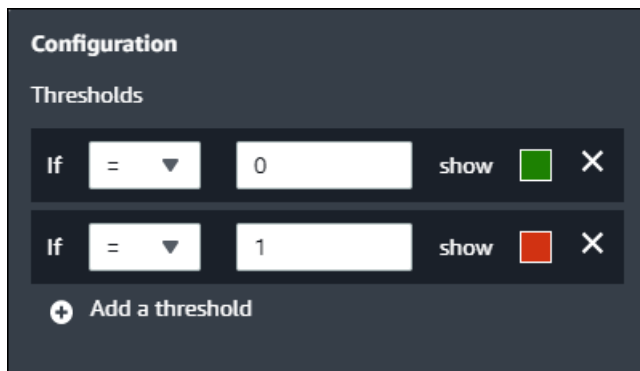

You can also configure what information the widget displays about asset properties.

To toggle property units and values


1. Choose the **Configuration** icon for the status widget to change.
2. Select or clear the **Show labels** option. When this option is enabled, the widget displays the unit and value of each asset property.
3. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

KPI

The KPI visualization provides a compact representation when you need an overview of your asset properties. This overview gives you the most critical insights into the overall performance of your devices, equipment, or processes. You can change the title of each property within the visualization.

Example

The following is a key performance indicator (KPI) visualization that shows four asset properties.

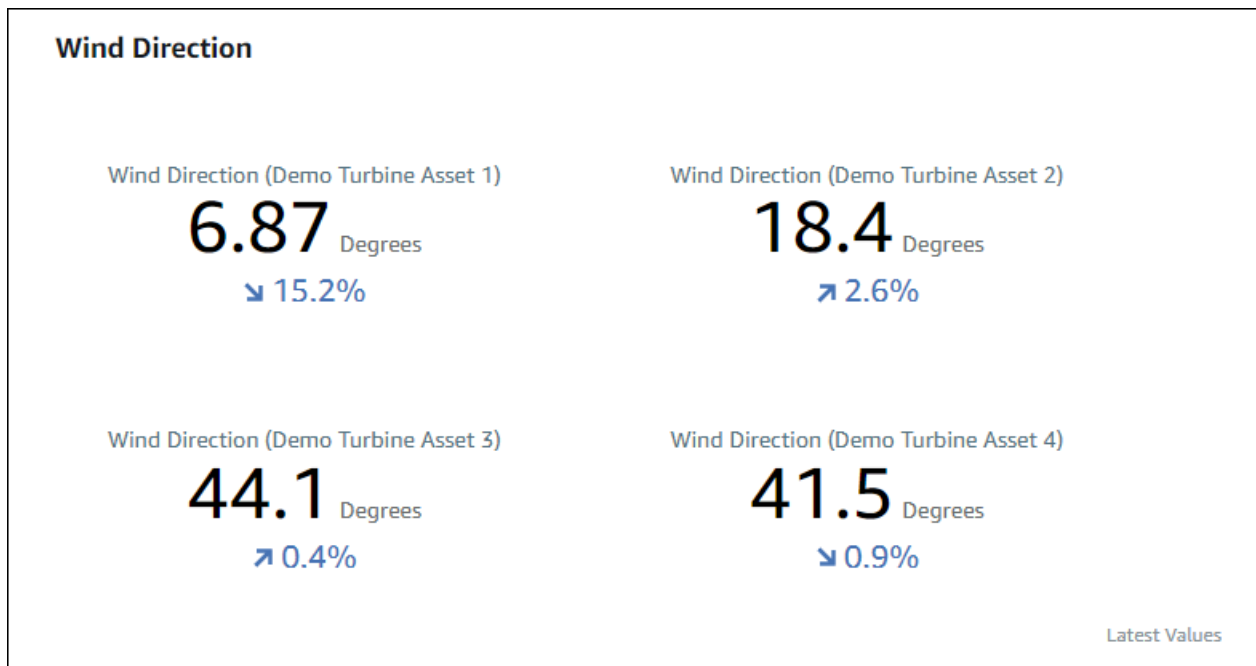

The KPI visualization shows the following information:

- The latest value for an asset property or the latest state of an alarm for the selected time range.
- The trend for that value compared to a previous value, which is the first data point before the selected time range.

To display a KPI, choose the KPI icon from the visualization type menu.



Table

The table widget provides a compact representation of multiple asset properties or alarms. You can use the overview to see detailed information about the performance of multiple devices, equipment, or processes.

You can display either properties or alarms in a table. You can't display properties and alarms in the same table.

Example

The following is a table widget that shows four asset properties.

Torque (KiloNewton Meter)		
Property	Latest value	Unit
Torque (KiloNewton Meter) (Demo Turbine Asset 1)	2.44	kNm
Torque (KiloNewton Meter) (Demo Turbine Asset 2)	2.13	kNm
Torque (KiloNewton Meter) (Demo Turbine Asset 3)	3.1	kNm
Torque (KiloNewton Meter) (Demo Turbine Asset 4)	2.06	kNm

To display a table widget, choose the table icon from the visualization type menu.




Configuring thresholds

As a project owner, you can configure thresholds for your visualizations to indicate when asset properties are outside their normal operating ranges. When you add a threshold, you define a rule and a color. If at least one of a property's data points crosses the threshold for a selected time range, the visualization displays that property's legend in the color that you choose. You can choose if the visualization also displays the property's data in the color that you choose. You can add multiple thresholds to each visualization, and choose colors to represent severities.

Note

If you add a property with an alarm to a visualization, the visualization automatically displays the alarm as a threshold.

The threshold in the following example indicates when a wind farm's total power output is less than **30,000** watts. The visualization displays the legend in green because the property value meets the threshold.

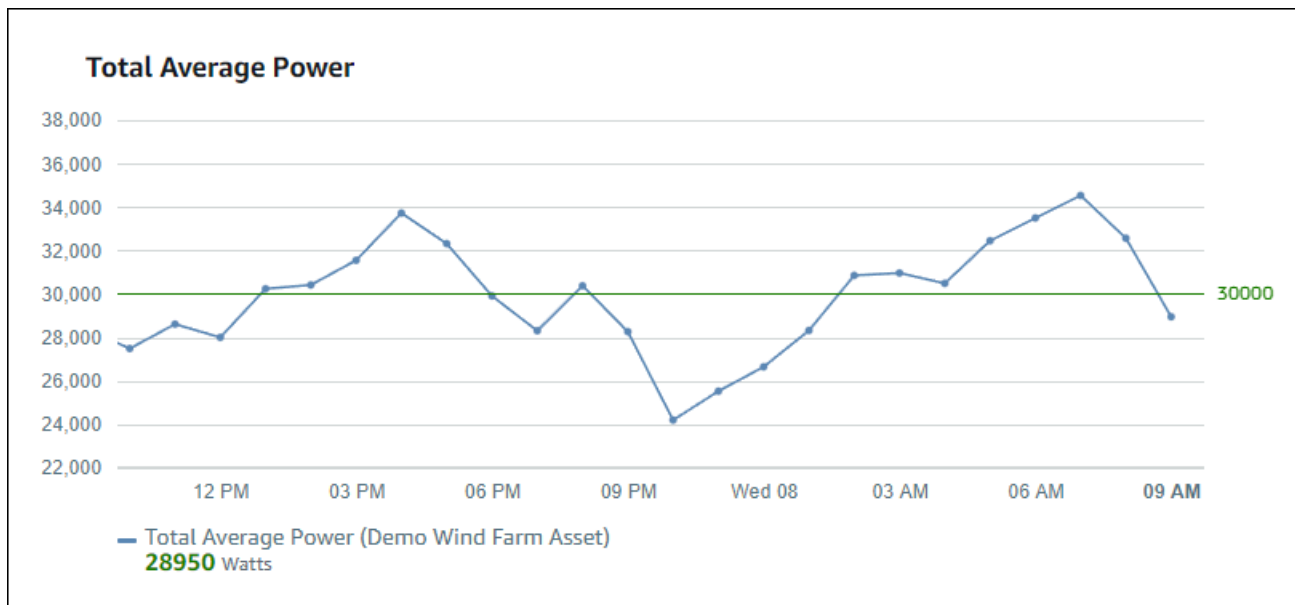

When multiple thresholds apply to a data point, SiteWise Monitor uses the following rules to choose which threshold's color to display:

- If the data point is positive or zero, the visualization displays the color of the threshold with the greatest value.
- If the data point is negative, the visualization displays the color of the threshold with the most negative value.
- If the data point meets multiple thresholds with the same value, the visualization displays the color of the last threshold that you added.

Note

SiteWise Monitor rounds data points in visualizations but uses the actual value to compare with thresholds. Consider an example where you have a data point with value **5.549**. This data point displays as **5.55**, but the data point won't meet a threshold that checks for data points greater than or equal to **5.55**.

Adding a threshold to a visualization


As a project owner, you can define thresholds for each visualization.

Note

You can add up to six thresholds to each visualization.

To add a threshold to a visualization

1. Choose the **Configuration** icon for the visualization to change.

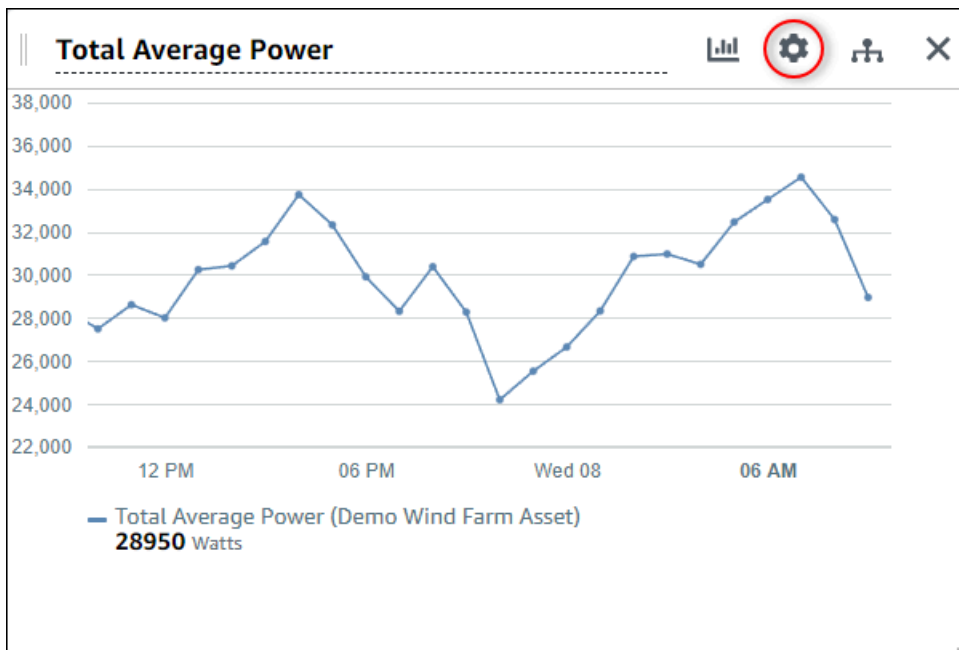

2. If the visualization already has a threshold, choose **Add a threshold** to add a new threshold.



3. Choose one of the following comparison operators:
 - < – Highlight properties that have at least one data point less than the specified value.
 - > – Highlight properties that have at least one data point greater than the specified value.
 - ≤ – Highlight properties that have at least one data point less than or equal to the specified value.
 - ≥ – Highlight properties that have at least one data point greater than or equal to the specified value.


- = – Highlight properties that have at least one data point equal to the specified value.
4. Enter a threshold value to compare data points with the specified operator.
 5. Choose a threshold color. The visualization displays property legends in this color for properties with at least one data point that meets the threshold rule. When you enable **Color breached values**, the visualization also colors data that meets the threshold rule. You can use the color picker, enter a hexadecimal color code, or enter color component values.
 6. (Optional) Toggle **Color breached values**. When you enable this option, the visualization displays the data in color when it meets the threshold.
 7. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Removing a threshold from a visualization

As a project owner, you can remove a threshold from a visualization if you no longer need it.

To remove a threshold from a visualization

1. Choose the **Configuration** icon for the visualization to change.
2. Choose the **X** icon for the threshold to remove.

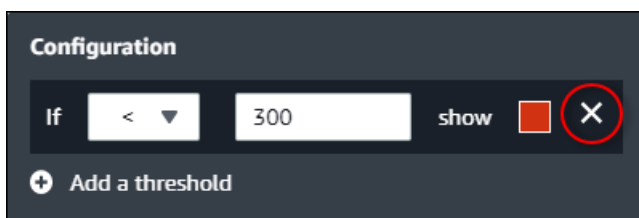

3. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.


Configuring trend lines

As a project owner, you can configure trend lines to display statistical analyses on your data. When you add a trend line, you choose the type of analysis and the property to analyze. This lets you and your team identify trends in your data to better understand your operation.

The following visualization types support trend lines:

- [Line](#)
- [Scatter](#)
- [Bar](#)

The following is an example visualization with a linear trend line.

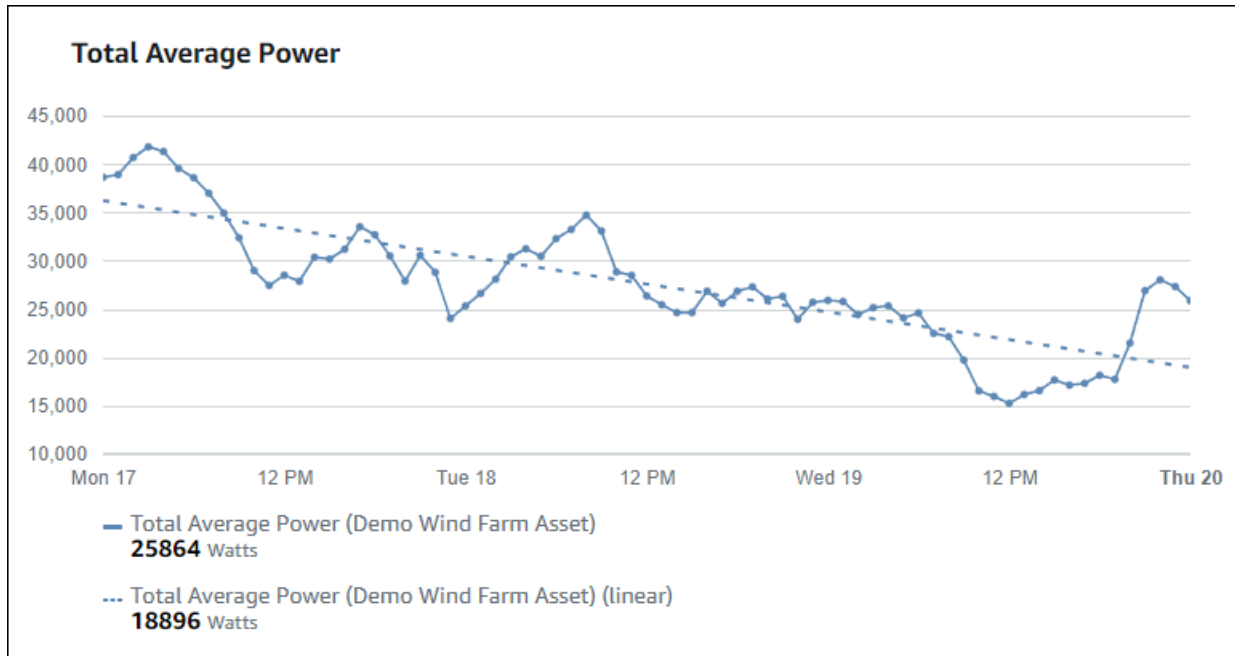

Note

The dashboard uses only data from the selected time range to compute trend lines. This means that trend lines only show trends for visible data.

Adding a trend line to a visualization


As a project owner, you can define trend lines for each visualization.

Note


You can add one of each type of trend line to each property in a visualization.

To add a trend line to a visualization

1. Choose the **Configuration** icon for the visualization to change.

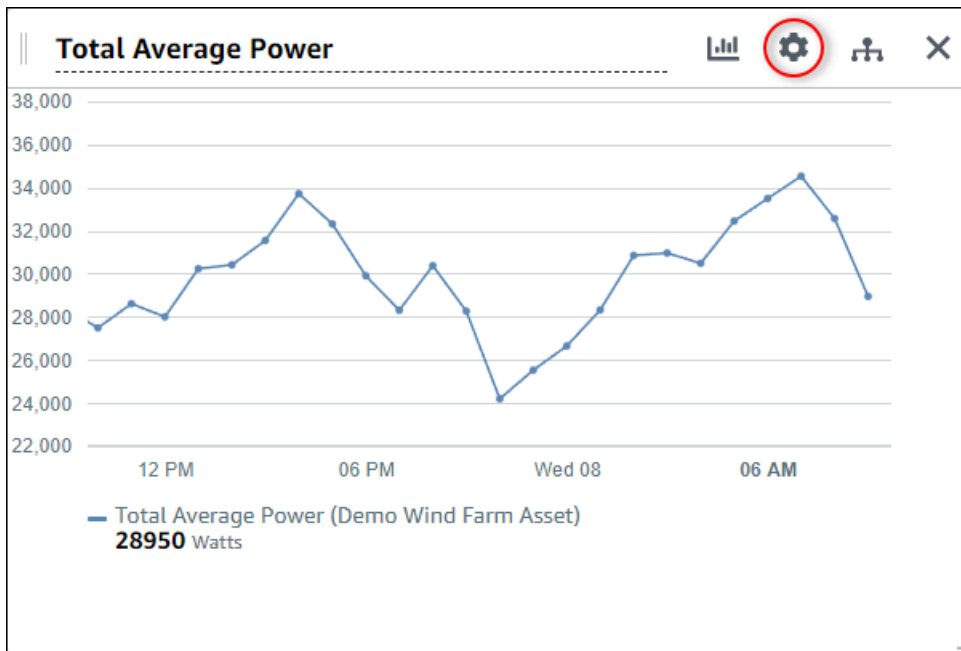

2. Choose **Add a trend line**.

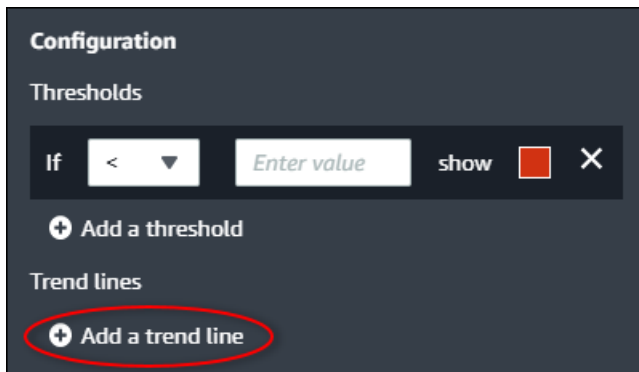

3. Choose the type of trend line to display from the following option:
 - **Linear** – A linear regression line. SiteWise Monitor uses the [least squares](#) method to calculate the linear regression.
4. Choose the property for which the trend line displays.

The trend line displays in the same color as the property data.


5. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Removing a trend line from a visualization

As a project owner, you can remove a trend line from a visualization if you no longer need it.

To remove a trend line from a visualization

1. Choose the **Configuration** icon for the visualization to change.
2. Choose the **X** icon for the trend line to remove.

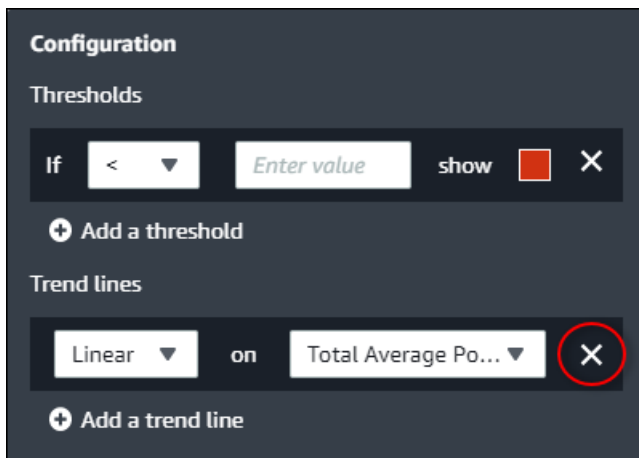


3. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Adjusting dashboard layout

As the project owner, you can choose the best visualizations for your asset properties and alarms, and you can adjust the size and location of your visualizations in the dashboard.

To adjust your layout

1. To move a visualization, use the control icon in the upper left. Drag the visualization to a new location.

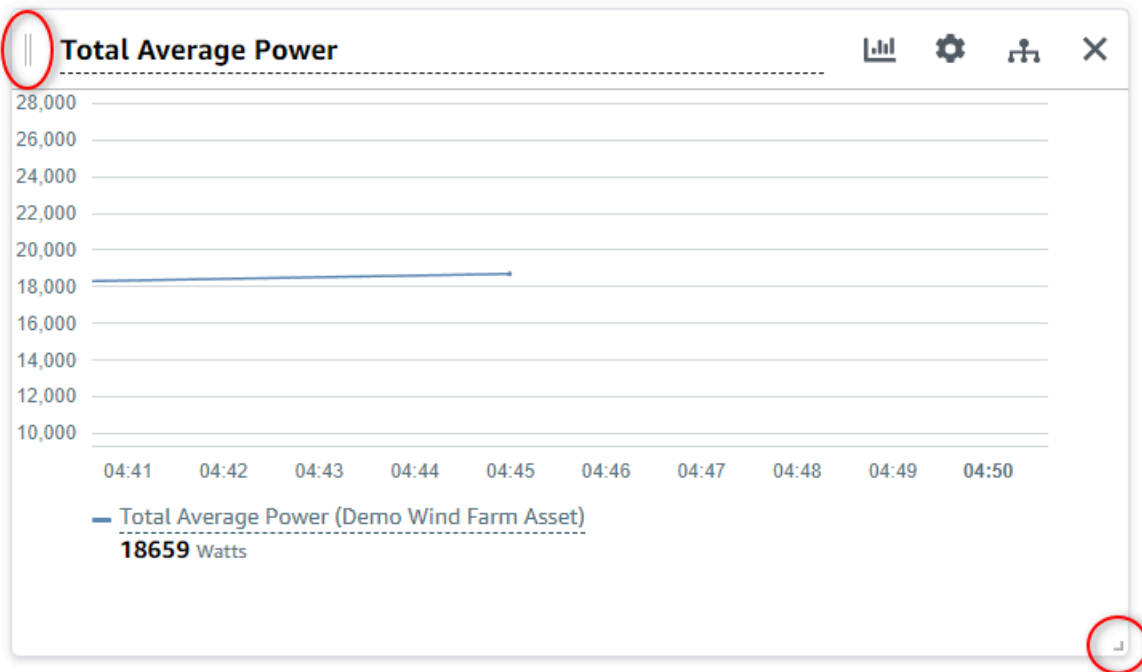

2. To change the size of a visualization, use the resize control in the lower right. Drag the corner to a new size and shape. Visualizations snap to the grid when resized, so you only have coarse control over the size.
3. After you finish editing the dashboard, choose **Save dashboard** to save your changes. The dashboard editor closes. If you try to close a dashboard that has unsaved changes, you're prompted to save them.

Deleting dashboards

You must be a project owner or portal administrator to delete dashboards. You can delete a dashboard from the **Dashboards** page or from the list of dashboards in a specific project.

To delete a dashboard from the dashboards page

1. In the navigation bar, choose the **Dashboards** icon.



2. In the **Projects** drop-down list, choose the project whose dashboards you want to delete.

Dashboards

Filter by project Open Delete Create dashboard

Wind Farm 1

<input type="checkbox"/>	Name	Last updated	Project	Date created
<input type="checkbox"/>	Turbine 1	12/27/2019, 1:54:05 PM	Wind Farm 1	12/27/2019, 1:52:33 PM
<input type="checkbox"/>	Turbine 2	12/27/2019, 1:55:09 PM	Wind Farm 1	12/27/2019, 1:54:18 PM
<input type="checkbox"/>	Turbine 3	12/27/2019, 1:55:57 PM	Wind Farm 1	12/27/2019, 1:55:12 PM
<input type="checkbox"/>	Turbine 4	12/27/2019, 1:56:47 PM	Wind Farm 1	12/27/2019, 1:56:03 PM
<input type="checkbox"/>	Wind Farm Dashboard	7/8/2020, 9:43:06 AM	Wind Farm 1	12/27/2019, 1:18:22 PM

You can sort the list of dashboards by using the column headings.

Note

If you can't find a particular project, you might not have been invited to view that project. Contact the project owner to request an invitation.

3. Select the check boxes for the dashboards to delete, and then choose **Delete**.
4. In the **Delete dashboards** dialog box, choose **Confirm**.

Important

Deleting a dashboard deletes all visualizations and settings. You can't undo this action. Delete a dashboard only when you are certain that you no longer need it.

To delete a dashboard from a project

1. In the navigation bar, choose the **Projects** icon.



2. On the **Projects** page, choose the project whose dashboards you want to delete.

Projects

< 1 >

	Name ▲	Last updated ▼	Date created ▼	Description
<input type="radio"/>	Wind Farm 1	12/27/2019, 3:31:28 PM	12/27/2019, 1:16:25 PM	Contains asset data for Wind Farm #1 for the Example Corporation.
<input type="radio"/>	Wind Farm 2	12/30/2019, 10:27:55 AM	12/27/2019, 3:31:42 PM	Contains asset data for Wind Farm #2 for the Example Corporation.
<input type="radio"/>	Wind Farm 3	12/27/2019, 4:11:17 PM	12/27/2019, 3:31:12 PM	Contains asset data for Wind Farm #3 for the Example Corporation.

3. In the **Dashboards** section, select the check boxes for the dashboards to delete, and then choose **Delete**.
4. In the **Delete dashboards** dialog box, choose **Confirm**.

Important

Deleting a dashboard deletes all visualizations and settings. You can't undo this action. Delete a dashboard only when you are certain that you no longer need it.

Monitoring with alarms

Alarms alert you and your team when equipment or processes perform sub-optimally. Optimal performance of a machine or process means that the values for certain metrics should be within a range of high and low limits. When these metrics are outside their operating range, equipment operators must be notified so that they can fix the issue. Alarms help you quickly identify issues and notify operators to maximize performance of your equipment and processes.

Note

The alarm notifications feature isn't available in the China (Beijing) Region.

Amazon IoT SiteWise Monitor supports two types of alarms:

- Alarms that detect in the Amazon Cloud – You can view and customize the thresholds and notification settings for these alarms. You can also acknowledge and snooze these alarms.

Important

After you enable the alarms feature for your portals, members of your organization can create only Amazon IoT Events alarms in your portals.

- External alarms – These alarms detect on external equipment and then send the alarm state to the Amazon Cloud. You can't customize, acknowledge, or snooze these alarms. These alarms don't have any information other than their state.

Alarms have the following states:

- **Normal** – The alarm is enabled but inactive. The equipment or process operates as expected.
- **Active** – The alarm is active. The equipment or process is outside its operating range and needs attention.
- **Acknowledged** – An operator acknowledged the state of the alarm.
- **Latched** – The alarm returned to normal but was active and no operator acknowledged it. The equipment or process requires attention to reset the alarm to normal.

- **Snoozed** – The alarm is inactive because an operator snoozed the alarm. The operator defines the duration for which the alarm snoozes. After that duration, the alarm returns to normal state.
- **Disabled** – The alarm is inactive and won't detect any changes.

You can perform the following alarm-related tasks.

Task	Required role	Description
Creating alarm definitions	Portal administrator	Create alarm definitions on models to monitor properties associated with the models.
Viewing alarm details	Portal administrator, project owner, and project viewer	View details about the alarms that you can access.
Responding to alarms	Portal administrator, project owner, project viewer	Acknowledge or snooze the alarms that you can access.
Configuring alarms	Portal administrator, project owner	Customize the threshold for the alarms that you can access.
Visualizing alarms in dashboards	Portal administrator, project owner	Add alarms to dashboards to visualize alarm state or alarms as thresholds in your dashboards.

Topics

- [Creating alarm definitions](#)
- [Viewing alarm details](#)
- [Responding to alarms](#)
- [Configuring alarms](#)
- [Visualizing alarms in dashboards](#)

Creating alarm definitions

On the **Models** page, you can create Amazon IoT Events alarms on models to monitor properties associated with the models.

Note

- Your IT administrator must enable the alarms feature for your portal before you can create alarms.

For more information, see [Enabling alarms for your SiteWise Monitor portals](#) in the *Amazon IoT SiteWise User Guide*.

To create an alarm definition

1. In the navigation bar, choose the **Models** icon.
2. Choose a model in the **Models** hierarchy.
3. Choose the **Alarms** tab for the model.
4. Choose **Create an alarm definition**.
5. On the **Define threshold** page, you define when the alarm is invoked and the severity of the alarm. Do the following:
 - a. Choose the property on which the alarm monitors. Each time this property receives a new value, Amazon IoT SiteWise sends the value to Amazon IoT Events to evaluate the state of the alarm.
 - b. Select the operator to use to compare the property with the threshold value. Choose from the following options:
 - **< less than**
 - **<= less than or equal**
 - **== equal**
 - **!= not equal**
 - **>= greater than or equal**
 - **> greater than**

- c. Choose the property or custom value to use as the threshold. Amazon IoT Events compares the value of the property with the value of this attribute.

Note

If you choose **Custom value**, enter a number.

- d. Enter the **Severity** of the alarm. Use an integer that your team understands to reflect the severity of this alarm.
- e. Choose an asset to preview this threshold.
- f. Choose **Next**.

The screenshot displays the 'Define threshold' configuration interface. On the left, a sidebar shows the progress: Step 1 (Define threshold), Step 2 (Configure settings), and Step 3 (optional, Configure notification). The main area is titled 'Define threshold' and contains a 'Threshold' section with the instruction 'Specify when to invoke the alarm.' Below this, the 'Model' is set to 'Demo Turbine Asset Model'. The configuration rule is: 'if Torque (KiloNewton Meter) < Custom value 500 then severity 200'. A 'Preview' section allows selecting an asset, with 'Demo Turbine Asset 4' chosen. The preview chart shows a y-axis for torque in kNm (ranging from 250 to 750) and an x-axis for time (from 06:45 to 07:40). A red horizontal line is drawn at the 500 kNm mark, with the text 'No data' and 'There's no data to display for this time range.' The 'Next' button is highlighted in orange.

6. On the **configuration settings** page, you enter a name and choose the default state for this alarm definition. Do the following:

- a. Enter a unique alarm name.

- b. Specify the **Default state** for this alarm definition. You can enable or disable all alarms created based on this alarm definition. You can enable or disable individual alarms associated with model in a later step.
- c. Choose **Next**.

The screenshot shows the 'Configure settings' page for creating an alarm. The page is titled 'alarm-model-test > Create alarm'. On the left, there is a navigation pane with three steps: 'Step 1 Define threshold', 'Step 2 Configure settings' (which is highlighted), and 'Step 3 - optional Configure notification'. The main content area is titled 'Configure settings' and contains two sections: 'Settings' and 'Default state'. In the 'Settings' section, there is a 'Name' field with the text 'example-alarm' entered, which is highlighted with a red box. Below the field is a note: 'The alarm name must have 1-128 characters. Valid characters: a-z, A-Z, 0-9, _ (underscore), and - (hyphen)'. In the 'Default state' section, there are two radio buttons: 'Enabled' (which is selected) and 'Disabled'. At the bottom right of the page, there are three buttons: 'Cancel', 'Previous', and 'Next' (which is highlighted with a red box).

Viewing alarm details


On the **Assets** page, you can view and respond to the alarms on any asset that is associated with your projects. Portal administrators have access to all assets in the portal and can use the **Assets** page to view and configure all assets' alarms.

To view details about an alarm

1. In the navigation bar, choose the **Assets** icon.



2. (Optional) Choose a project in the projects drop-down list to show only assets from a specific project.

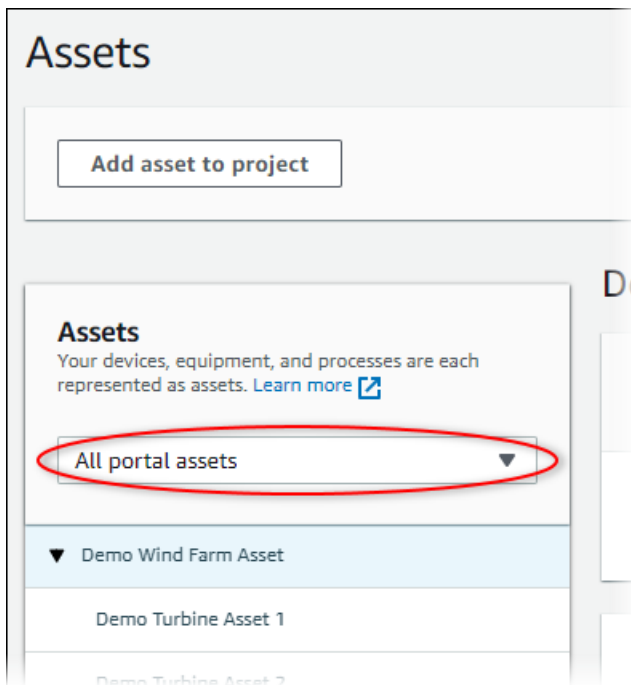

3. Choose an asset in the **Assets** hierarchy.

Tip

Expand the arrow next to an asset to view all children of that asset.

4. Choose the **Alarms** tab for the asset.
5. Choose the alarm to view.

The alarm details page opens. You can view the alarm's configuration, status history, and notification settings.

Responding to alarms

On the **Assets** page, you can respond to an alarm so that your team knows that you see the alarm. When you respond to an alarm, you can leave a note with details about the alarm or the actions that you took. If you don't acknowledge an active alarm before it becomes inactive, the alarm becomes latched. The latched state indicates that the alarm became active and wasn't acknowledged. You might need to check on the equipment or process and acknowledge the latched alarm.

You can do the following to respond to an alarm:

- Acknowledge an alarm to indicate that you are handling the issue.
- Snooze an alarm to disable it temporarily.

Topics

- [Acknowledging alarms](#)
- [Snoozing alarms](#)

Acknowledging alarms

When an alarm is active or latched, you can acknowledge it to indicate to your team that you are handling the issue. You can leave a note about the alarm when you acknowledge it.

You can acknowledge alarms that have the following states:

- **Active**
- **Latched**

Note


Your team can configure alarms that don't support the acknowledge option. You can't acknowledge these alarms, and these alarms can't have the **Acknowledged** or **Latched** states.

To acknowledge an alarm

1. In the navigation bar, choose the **Assets** icon.



2. (Optional) Choose a project in the projects drop-down list to show only assets from a specific project.

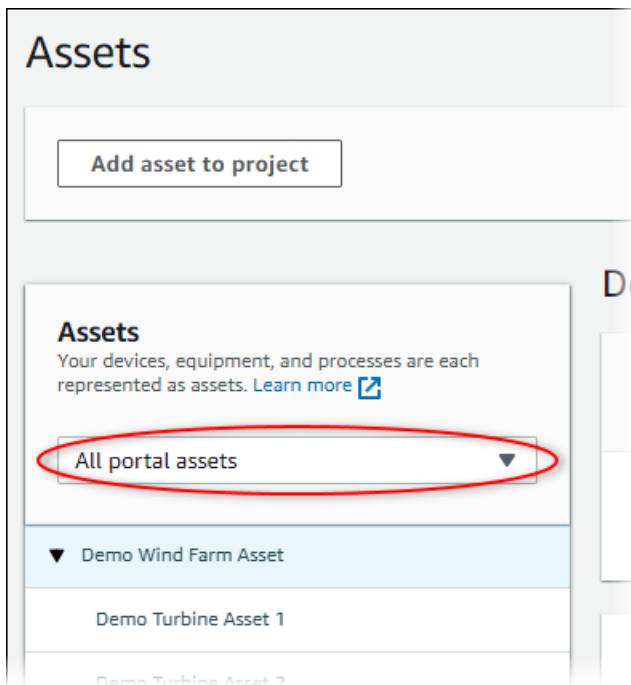

3. Choose an asset in the **Assets** hierarchy.

i Tip

Choose the arrow next to an asset to view all children of that asset.

4. Choose the **Alarms** tab for the asset.
5. Select the alarm to acknowledge.
6. Choose **Acknowledge**.

A modal opens where you can enter a comment.

7. (Optional) Enter a **Comment** about the alarm or the action you will take to acknowledge it.
8. Choose **Acknowledge**.

The alarm's state changes to **Acknowledged**.

Snoozing alarms

You can snooze an alarm to temporarily disable it. While the alarm is snoozed, it won't detect any changes. You might want to do this if you're aware that an equipment or process is broken or malfunctioning, so you don't need an alarm to go off. You can leave a note about the alarm when you snooze it.

You can snooze alarms that have the following states:


- **Normal**
- **Active**
- **Acknowledged**
- **Latched**
- **Snoozed**

To snooze an alarm

1. In the navigation bar, choose the **Assets** icon.



2. (Optional) Choose a project in the projects drop-down list to show only assets from a specific project.

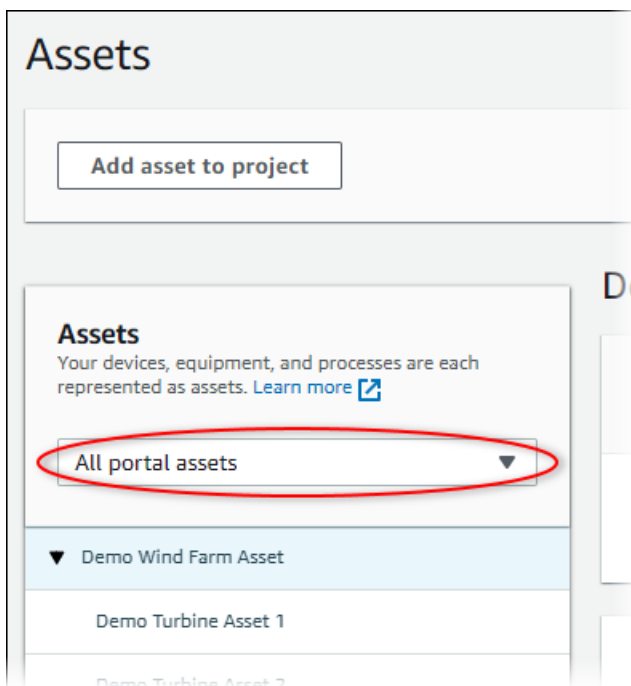

3. Choose an asset in the **Assets** hierarchy.

Tip

Choose the arrow next to an asset to view all children of that asset.

4. Choose the **Alarms** tab for the asset.
5. Select the alarm to snooze.
6. Choose **Snooze**.

A modal opens where you can specify the snooze duration and enter a comment.

7. Enter the **Snooze duration** to snooze the alarm.
8. (Optional) Enter a **Comment** about the alarm.
9. Choose **Snooze**.

The alarm's state changes to **Snoozed**. The alarm stays **Snoozed** for the duration that you specify.

Configuring alarms

On the **Assets** page, project owners can configure each alarm to set it up for their equipment and processes. You can update the alarm's threshold value and notification settings.

Notes


- You can only configure alarms that your team sets up to detect in the Amazon Cloud. You can't configure external alarms.
- You can only configure alarm properties that your team sets up for you to customize. For example, your Amazon administrator might define a threshold or notification recipient as a static value that you can't change.

To configure an alarm

1. In the navigation bar, choose the **Assets** icon.



2. (Optional) Choose a project in the projects drop-down list to show only assets from a specific project.

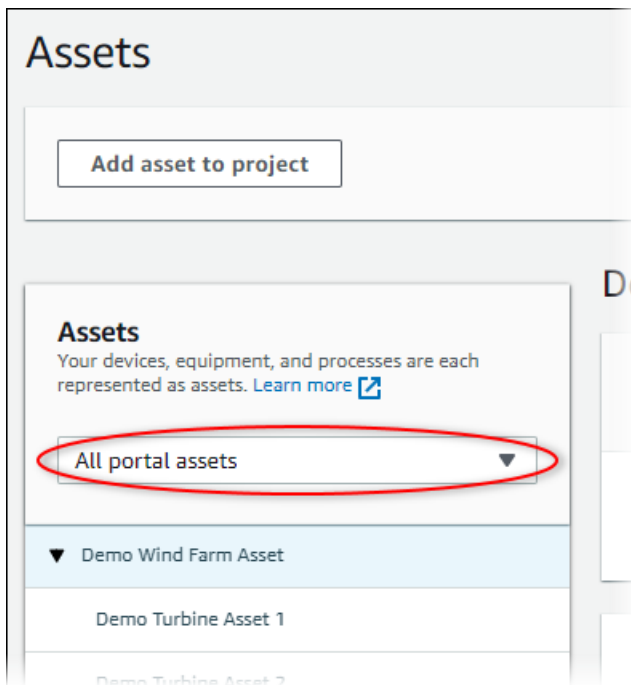

3. Choose an asset in the **Assets** hierarchy.

Tip

Choose the arrow next to an asset to view all children of that asset.

4. Choose the **Alarms** tab for the asset.
5. Select the alarm to configure.
6. Choose **Configure**.
7. On the **Configure alarm** page, do any of the following:
 - a. Edit the threshold value for the alarm. You can preview the threshold on the recent data for the property that the alarm monitors.



- b. Choose a new **Notification recipient** for the alarm notification. You can choose an Amazon IAM Identity Center (IAM Identity Center) user in your organization.
- c. Change the message **Protocol** for the alarm notification.

- d. Change the **Custom message** to include in the notification. The notification message includes this message and information about the alarm state change.
8. Choose **Save**.

Visualizing alarms in dashboards

Project owners can add alarms to dashboards to visualize alarm state as data and alarms as thresholds on other properties.

- Add a property with an alarm to a visualization to display the alarm as a threshold on that property's data.
- Add alarms to [status](#) and [table](#) widgets to display alarm state in a dashboard.

Note

When you add a property that has an alarm to a visualization, the visualization automatically includes the alarm as a threshold.

For more information, see the following topics:

- [Creating dashboards](#)
- [Adding visualizations](#)
- [Customizing visualizations](#)

Keyboard and mouse shortcuts

You can use the following shortcuts to quickly perform certain tasks in Amazon IoT SiteWise Monitor.

Shortcut reference

Shortcut	Description
Double-click mouse	Zoom in a visualization at the selected point.
Press Shift and double-click mouse	Zoom out a visualization at the selected point.
Drag mouse	Zoom in a visualization to a selected time range.
Press Shift and drag mouse	Shift a visualization's time range left or right.

Document history for the Amazon IoT SiteWise Monitor Application Guide

The following table describes the documentation for this release of Amazon IoT SiteWise.

Change	Description	Date
Alarms general availability	The alarms feature is now generally available. Portal administrators can create alarm definitions in SiteWise Monitor portals	May 27, 2021
Region launch	Launched Amazon IoT SiteWise in China (Beijing).	February 3, 2021
Alarms	Added information about support for alarms in SiteWise Monitor. You can visualize , configure, and respond to alarms to monitor your equipment and processes.	December 15, 2020
Table visualization types	Added information about the table visualization type. You can use table widgets to display information about multiple properties in a compact visualization.	November 24, 2020
Status property value labels	Added information about how to toggle asset property unit and value labels for status widgets.	November 5, 2020
Status visualization types	Added information about the status visualization type.	October 16, 2020

	You can use status widgets to display properties' current or historical status.	
Visualization trend lines	Added information about how to configure trend lines for visualizations. You can display linear regressions for your data to visualize and identify trends.	August 20, 2020
Scatter visualization type	Added information about the scatter visualization type. You can use a scatter chart to display individual data points without lines between them.	July 21, 2020
Visualization thresholds	Added information about how to configure thresholds for your visualizations to indicate when data is outside normal operating ranges.	July 1, 2020
Keyboard and mouse shortcuts	Added information about how to use keyboard and mouse shortcuts to quickly perform certain tasks in Amazon IoT SiteWise Monitor.	January 31, 2020
Dashboards page, assets by project, and updated KPI chart	You can now view all of your dashboards in one place in the Dashboards page . If you're a project owner or viewer, you can now explore your projects' asset data on the Assets page . If you're a project owner, you can now add multiple asset properties to a KPI chart .	December 20, 2019

[Amazon IoT SiteWise Monitor released](#)

Released SiteWise Monitor as a feature of version 2 of Amazon IoT SiteWise. With SiteWise Monitor, Amazon administrators can create web portals for members of your organization to visualize and monitor your operational data stored in Amazon IoT SiteWise.

December 2, 2019